

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	92
A.2.3 Emissions in Non-restricted Frequency Bands:.....	96
A.3 6dB OCCUPIED BANDWIDTH	97
A.3.1 Emission Bandwidth Result.....	97
A.3.2 Measurement Plots	99
A.4 MAXIMUM PEAK OUTPUT POWER	105
A.4.1 Peak Output Power	105
A.4.2 Average Output Power (Reporting only).....	117
A.4.3 Measurement Plots	126
A.5 EMISSION LIMITATIONS	128
A.6 POWER SPECTRAL DENSITY	155
A.6.1 Power Spectral Density Result	155
A.6.2 Measurement Plots	157

A.1 CONDUCTED EMISSION

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

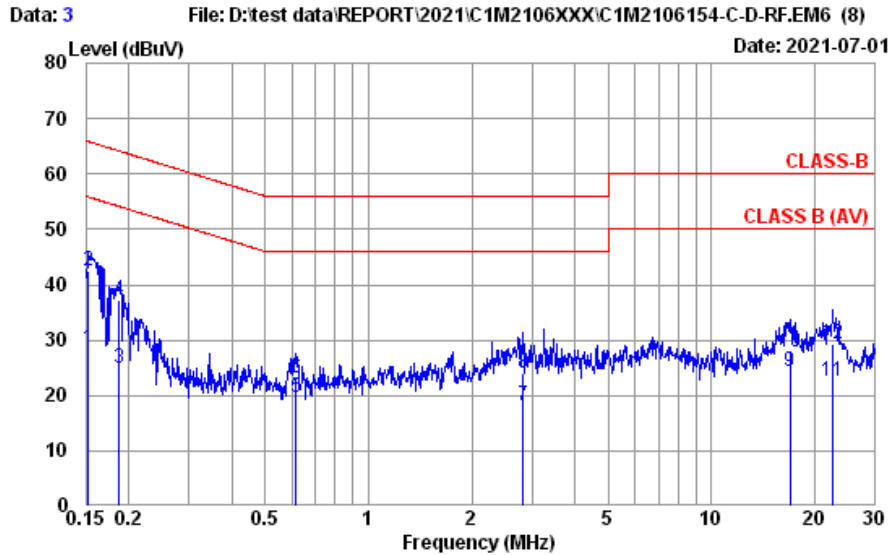


Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	8.23	28.52	55.87	27.35	Average
2	0.152	10.41	0.03	9.85	22.20	42.49	65.87	23.38	QP
3	0.187	10.39	0.03	9.85	4.61	24.88	54.15	29.27	Average
4	0.187	10.39	0.03	9.85	17.01	37.28	64.15	26.87	QP
5	0.614	10.37	0.03	9.85	-0.56	19.69	46.00	26.31	Average
6	0.614	10.37	0.03	9.85	2.91	23.16	56.00	32.84	QP
7	2.824	10.43	0.08	9.86	-2.18	18.19	46.00	27.81	Average
8	2.824	10.43	0.08	9.86	3.54	23.91	56.00	32.09	QP
9	16.928	11.00	0.18	9.92	3.27	24.37	50.00	25.63	Average
10	16.928	11.00	0.18	9.92	6.86	27.96	60.00	32.04	QP
11	22.535	11.18	0.21	9.96	1.23	22.58	50.00	27.42	Average
12	22.535	11.18	0.21	9.96	7.97	29.32	60.00	30.68	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

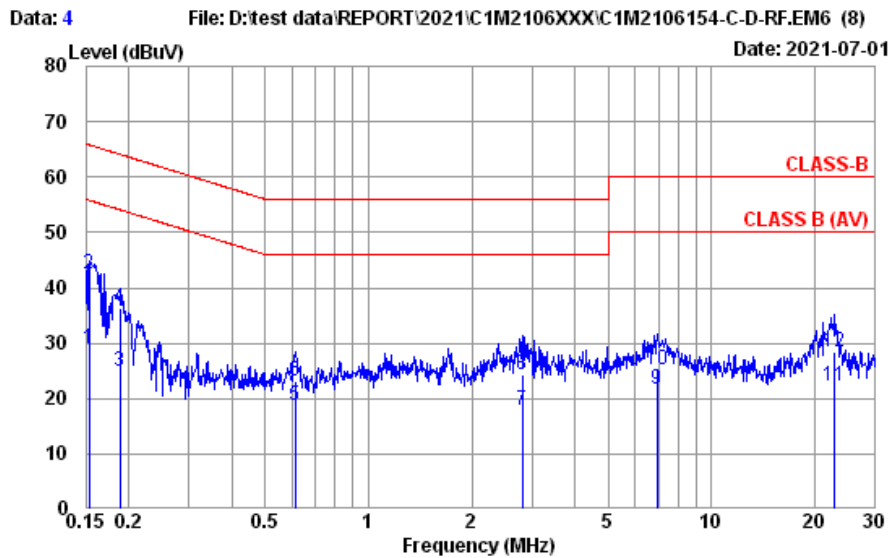


Site No. : No.8 Shielded Room Data No. : 4
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 26°C / 53% Engineer : Roy Hung
 EUT Model : 16Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.40	0.03	9.85	8.79	29.07	55.82	26.75	Average
2	0.153	10.40	0.03	9.85	22.31	42.59	65.82	23.23	QP
3	0.188	10.39	0.03	9.85	4.52	24.79	54.11	29.32	Average
4	0.188	10.39	0.03	9.85	16.03	36.30	64.11	27.81	QP
5	0.611	10.37	0.03	9.85	-1.58	18.67	46.00	27.33	Average
6	0.611	10.37	0.03	9.85	2.84	23.09	56.00	32.91	QP
7	2.809	10.41	0.07	9.86	-2.32	18.02	46.00	27.98	Average
8	2.809	10.41	0.07	9.86	3.96	24.30	56.00	31.70	QP
9	6.951	10.50	0.12	9.87	1.27	21.76	50.00	28.24	Average
10	6.951	10.50	0.12	9.87	4.85	25.34	60.00	34.66	QP
11	22.896	10.80	0.21	9.96	1.21	22.18	50.00	27.82	Average
12	22.896	10.80	0.21	9.96	7.54	28.51	60.00	31.49	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

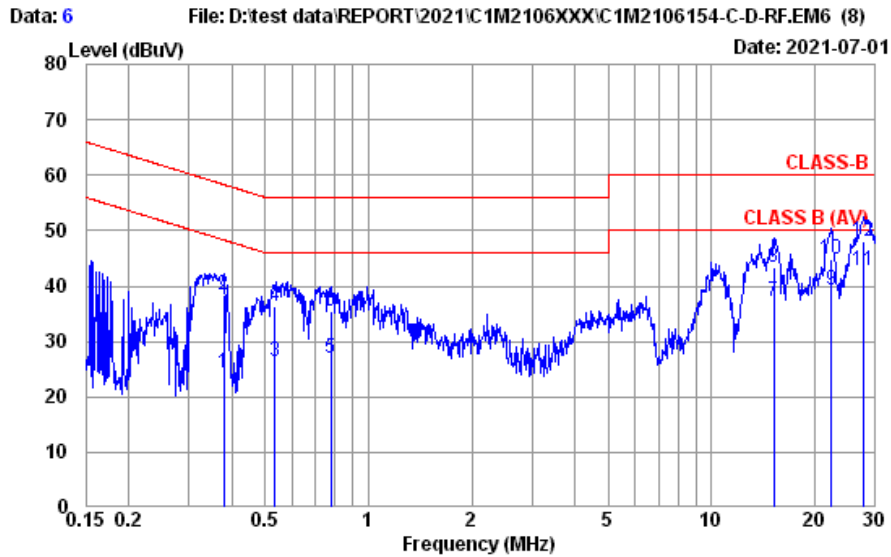


Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.379	10.37	0.03	9.85	4.14	24.39	48.30	23.91	Average
2	0.379	10.37	0.03	9.85	18.15	38.40	58.30	19.90	QP
3	0.535	10.37	0.03	9.85	6.22	26.47	46.00	19.53	Average
4	0.535	10.37	0.03	9.85	16.08	36.33	56.00	19.67	QP
5	0.775	10.38	0.04	9.85	6.62	26.89	46.00	19.11	Average
6	0.775	10.38	0.04	9.85	15.21	35.48	56.00	20.52	QP
7	15.146	10.93	0.17	9.91	16.23	37.24	50.00	12.76	Average
8	15.146	10.93	0.17	9.91	22.45	43.46	60.00	16.54	QP
9	22.298	11.17	0.21	9.95	18.00	39.33	50.00	10.67	Average
10	22.298	11.17	0.21	9.95	23.41	44.74	60.00	15.26	QP
11	27.855	11.33	0.23	9.99	21.16	42.71	50.00	7.29	Average
12	27.855	11.33	0.23	9.99	26.46	48.01	60.00	11.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

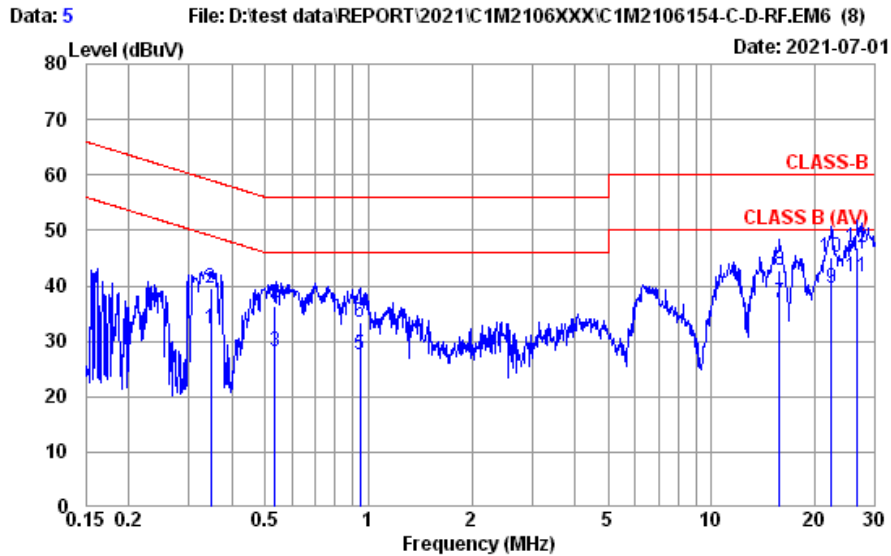

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.346	10.37	0.03	9.85	12.02	32.27	49.05	16.78	Average
2	0.346	10.37	0.03	9.85	19.35	39.60	59.05	19.45	QP
3	0.535	10.37	0.03	9.85	7.80	28.05	46.00	17.95	Average
4	0.535	10.37	0.03	9.85	16.06	36.31	56.00	19.69	QP
5	0.943	10.38	0.04	9.85	7.32	27.59	46.00	18.41	Average
6	0.943	10.38	0.04	9.85	13.03	33.30	56.00	22.70	QP
7	15.801	10.70	0.18	9.92	16.26	37.06	50.00	12.94	Average
8	15.801	10.70	0.18	9.92	21.93	42.73	60.00	17.27	QP
9	22.298	10.80	0.21	9.95	18.75	39.71	50.00	10.29	Average
10	22.298	10.80	0.21	9.95	24.08	45.04	60.00	14.96	QP
11	26.558	10.84	0.23	9.98	20.68	41.73	50.00	8.27	Average
12	26.558	10.84	0.23	9.98	25.76	46.81	60.00	13.19	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/06/28 ~ 30	Temp./Hum.	23 ~ 28°C/54 ~ 57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
84.320	15.08	0.82	32.58	52.70	36.02	40.00	3.98	Peak
124.090	18.09	0.97	32.53	46.40	32.93	43.50	10.57	Peak
338.460	21.00	1.66	32.46	54.26	44.46	46.00	1.54	Peak
508.210	24.34	2.23	32.44	46.01	40.14	46.00	5.86	Peak
729.370	28.06	2.90	32.24	39.05	37.77	46.00	8.23	Peak
965.080	30.30	3.21	31.15	29.66	32.02	54.00	21.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	19.23	0.56	32.66	50.93	38.06	40.00	1.94	Peak
168.710	19.13	1.12	32.48	53.27	41.04	43.50	2.46	Peak
423.820	22.86	1.97	32.44	49.95	42.34	46.00	3.66	Peak
729.370	28.06	2.90	32.24	38.40	37.12	46.00	8.88	Peak
847.710	29.15	3.07	31.91	39.49	39.80	46.00	6.20	Peak
965.080	30.30	3.21	31.15	34.97	37.33	54.00	16.67	Peak

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
84.320	15.08	0.82	32.58	53.42	36.74	40.00	3.26	Peak
168.710	19.13	1.12	32.48	45.87	33.64	43.50	9.86	Peak
338.460	21.00	1.66	32.46	52.86	43.06	46.00	2.94	Peak
508.210	24.34	2.23	32.44	45.51	39.64	46.00	6.36	Peak
847.710	29.15	3.07	31.91	43.48	43.79	46.00	2.21	Peak
967.990	30.33	3.22	31.15	30.18	32.58	54.00	21.42	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
44.550	20.28	0.65	32.65	46.69	34.97	40.00	5.03	Peak
168.710	19.13	1.12	32.48	53.83	41.60	43.50	1.90	Peak
254.070	18.38	1.39	32.47	53.47	40.77	46.00	5.23	Peak
423.820	22.86	1.97	32.44	48.73	41.12	46.00	4.88	Peak
847.710	29.15	3.07	31.91	39.17	39.48	46.00	6.52	Peak
967.990	30.33	3.22	31.15	31.75	34.15	54.00	19.85	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

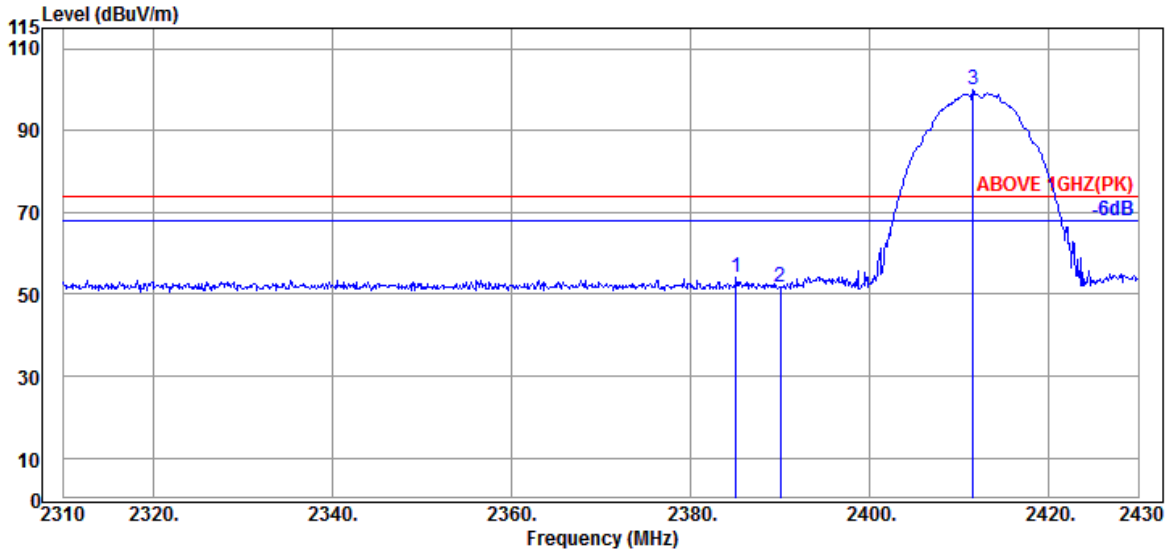

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.120	31.89	7.95	34.53	48.78	54.09	74.00	19.91	Peak
2390.040	31.89	7.95	34.54	46.47	51.77	74.00	22.23	Peak
@ 2411.520	31.94	7.96	34.54	94.61	99.97	---	---	Peak

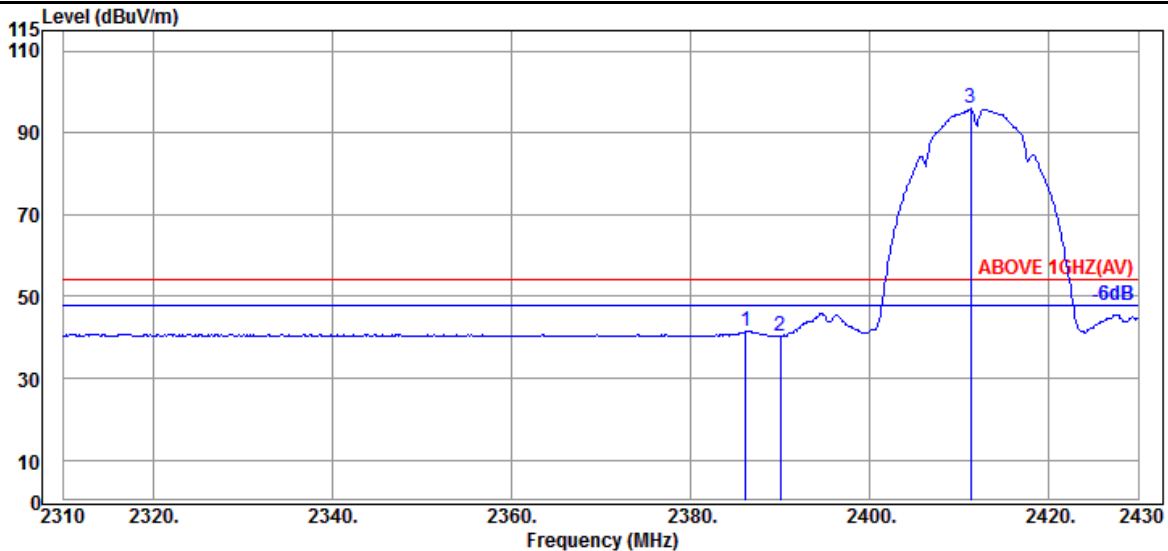


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	36.26	41.57	54.00	12.43	Average
2390.040	31.89	7.95	34.54	35.02	40.32	54.00	13.68	Average
@ 2411.280	31.94	7.96	34.54	90.49	95.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

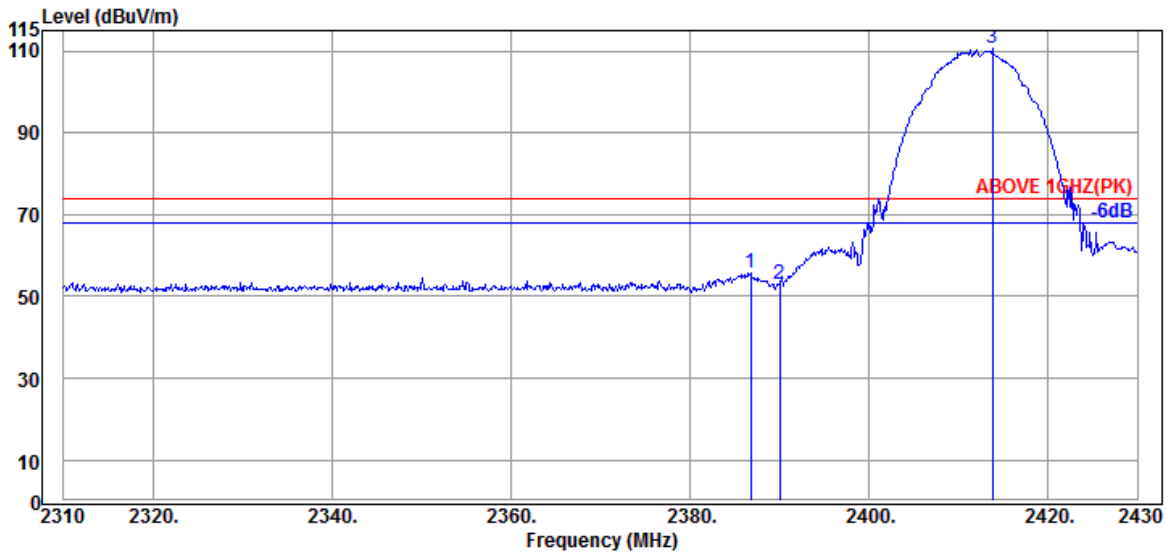

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	31.89	7.95	34.53	50.59	55.90	74.00	18.10	Peak
2390.040	31.89	7.95	34.54	47.71	53.01	74.00	20.99	Peak
@ 2413.800	31.94	7.96	34.54	105.11	110.47	---	---	Peak

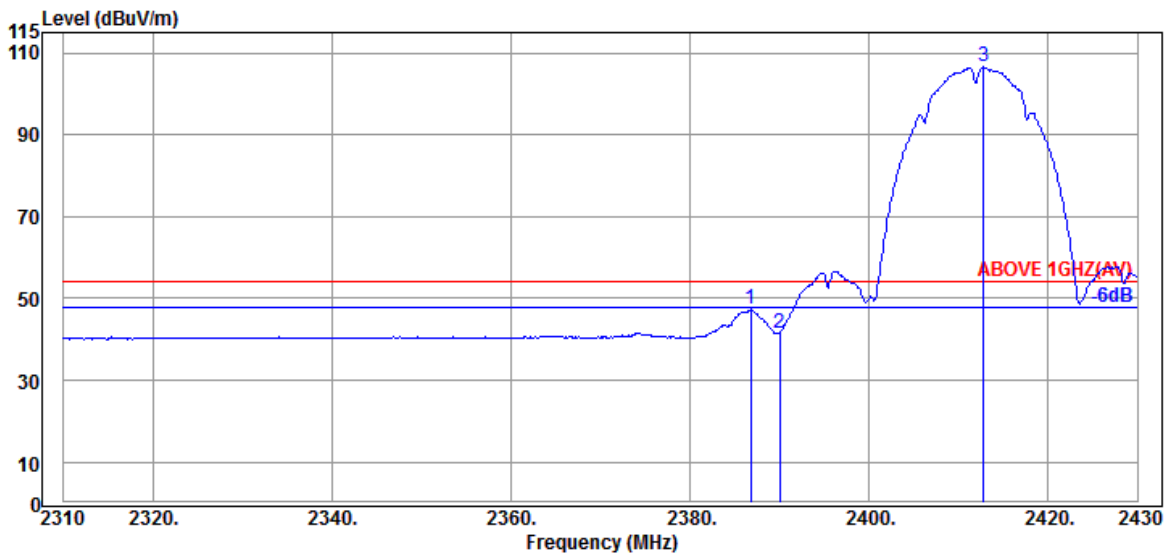


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	31.89	7.95	34.53	42.14	47.45	54.00	6.55	Average
2390.040	31.89	7.95	34.54	36.28	41.58	54.00	12.42	Average
@ 2412.840	31.94	7.96	34.54	101.16	106.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

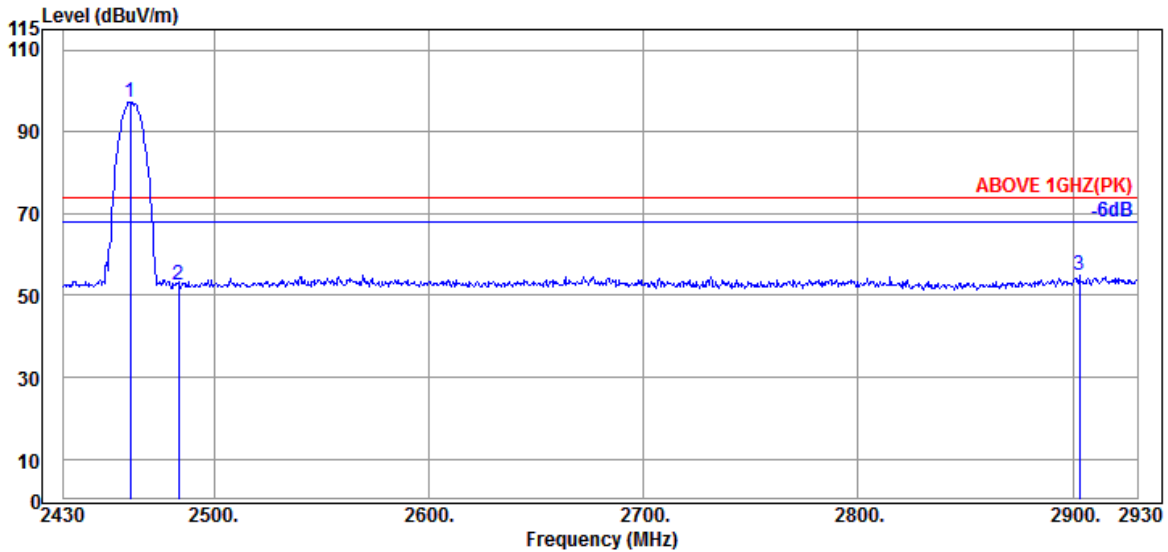

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	91.66	97.39	---	---	Peak
2483.500	32.30	7.99	34.55	46.97	52.71	74.00	21.29	Peak
2903.000	32.77	8.18	34.64	48.73	55.04	74.00	18.96	Peak

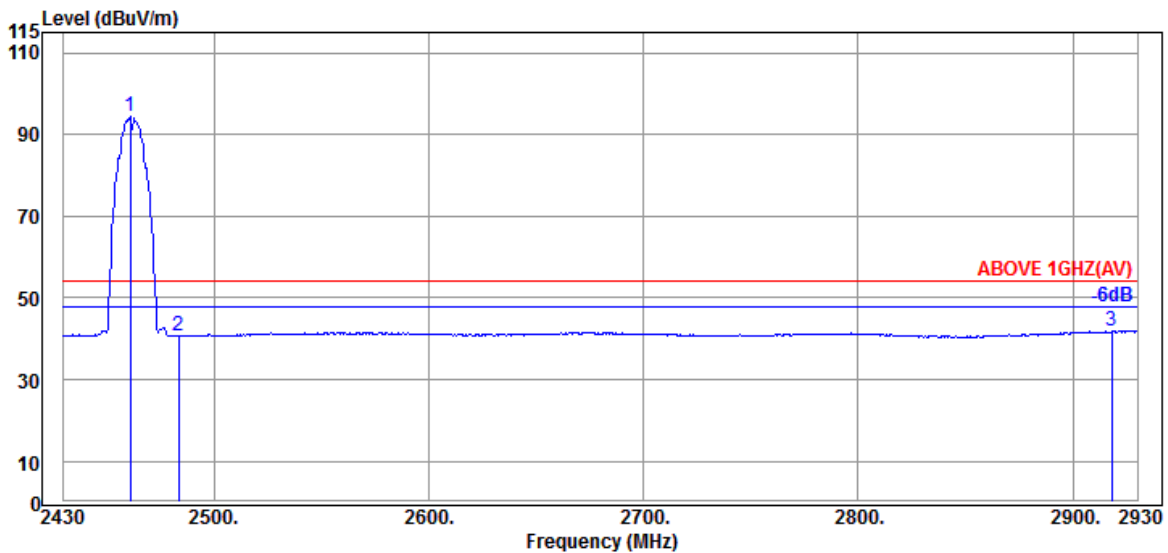


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	88.63	94.36	---	---	Average
2483.500	32.30	7.99	34.55	35.15	40.89	54.00	13.11	Average
2918.000	32.90	8.19	34.64	35.41	41.86	54.00	12.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

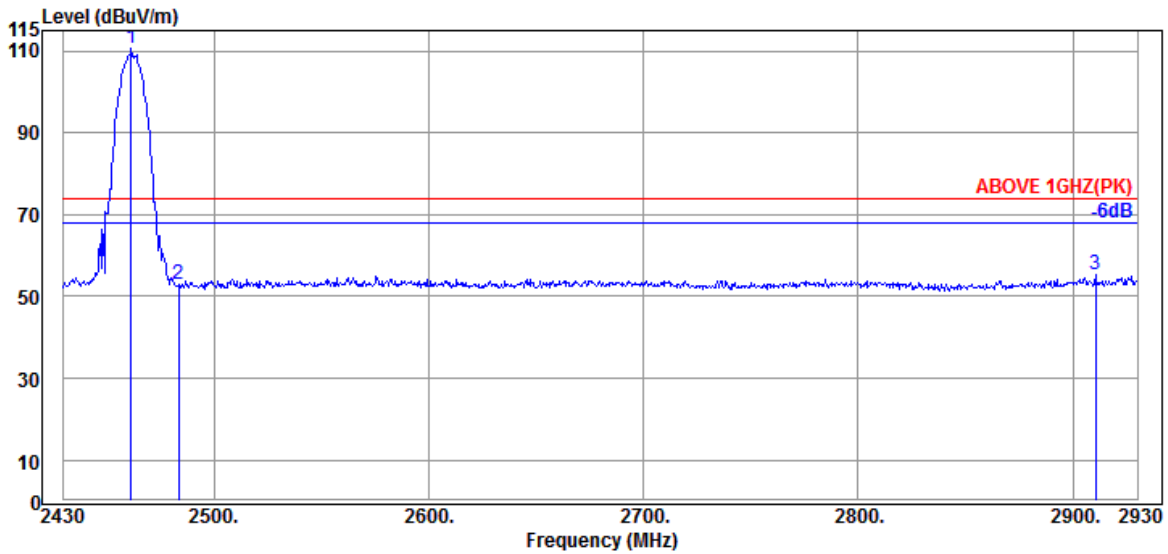

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	104.81	110.54	---	---	Peak
2483.500	32.30	7.99	34.55	47.02	52.76	74.00	21.24	Peak
2910.500	32.83	8.18	34.64	48.76	55.13	74.00	18.87	Peak

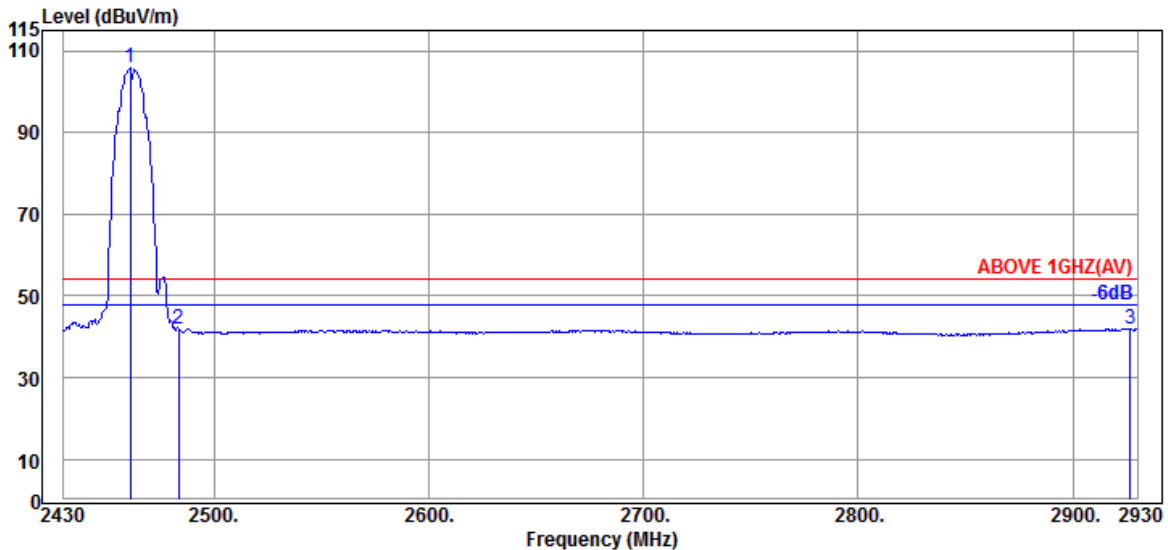


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	100.06	105.79	---	---	Average
2483.500	32.30	7.99	34.55	36.32	42.06	54.00	11.94	Average
2926.500	32.97	8.19	34.65	35.50	42.01	54.00	11.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

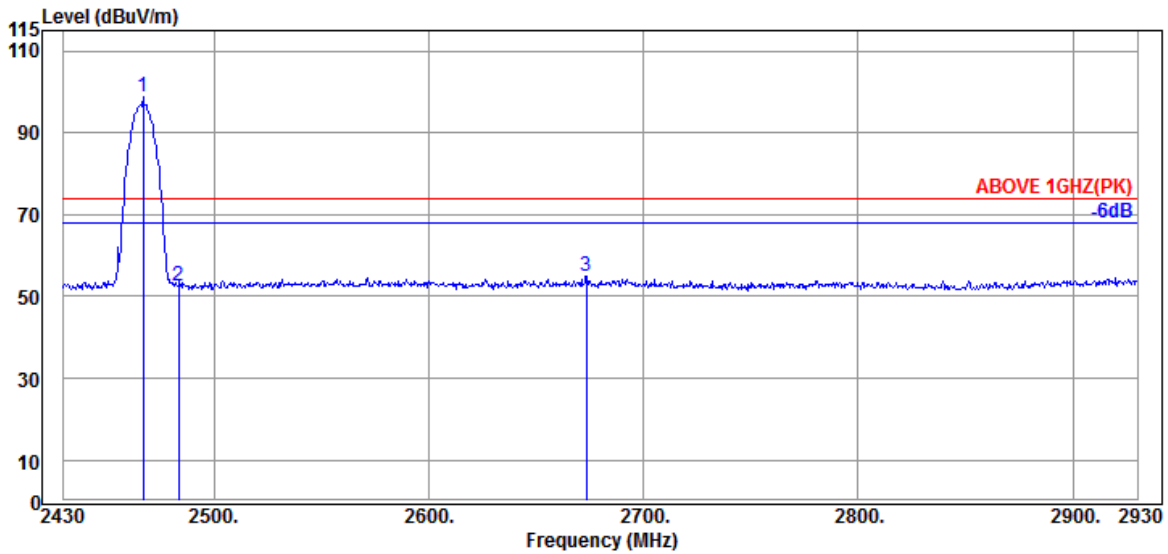

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.000	32.30	7.98	34.55	93.02	98.75	---	---	Peak
2483.500	32.30	7.99	34.55	46.78	52.52	74.00	21.48	Peak
2673.500	32.20	8.08	34.60	49.42	55.10	74.00	18.90	Peak

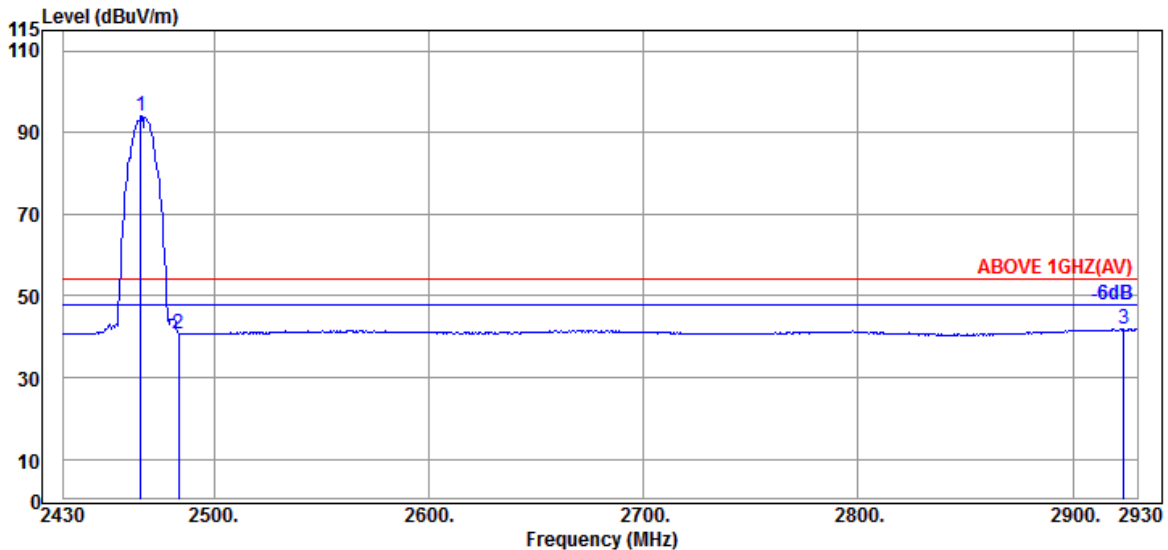


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	88.20	93.93	---	---	Average
2483.500	32.30	7.99	34.55	35.04	40.78	54.00	13.22	Average
2923.500	32.90	8.19	34.64	35.63	42.08	54.00	11.92	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

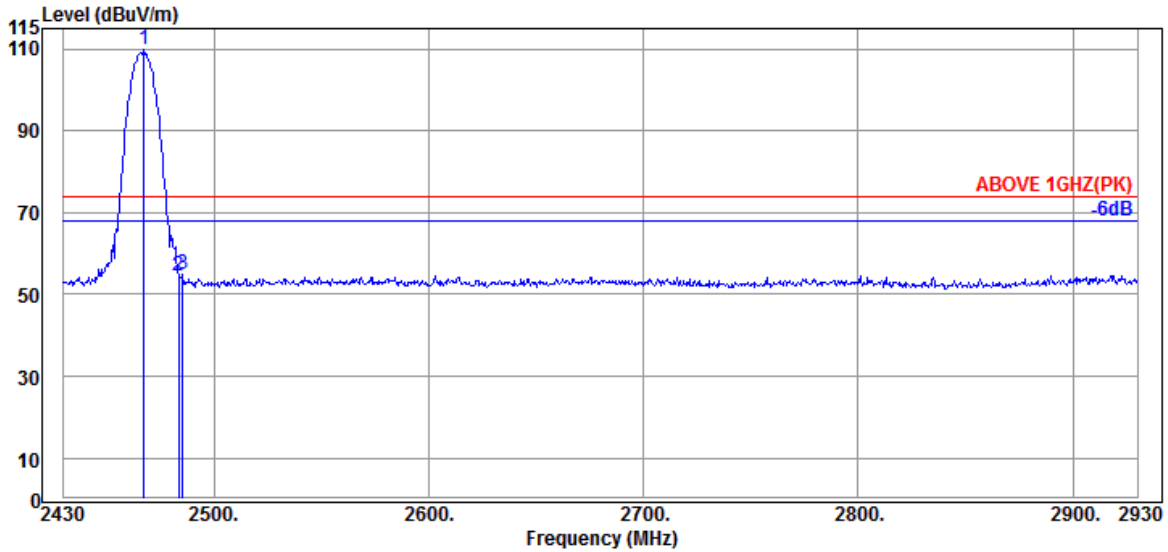

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	104.09	109.82	---	---	Peak
2483.500	32.30	7.99	34.55	48.78	54.52	74.00	19.48	Peak
2485.500	32.30	7.99	34.55	49.14	54.88	74.00	19.12	Peak

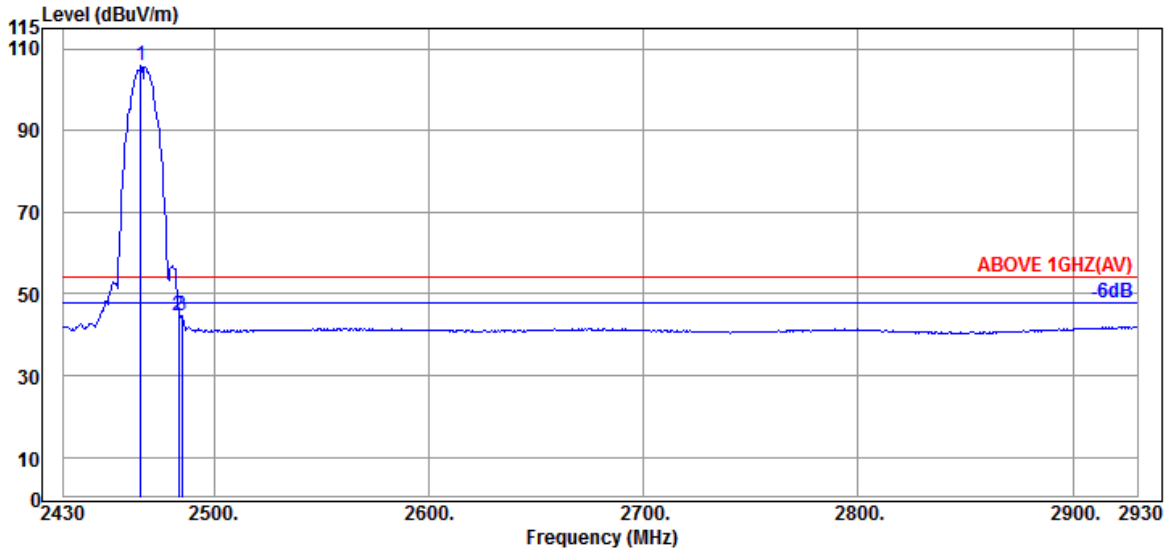


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	99.99	105.72	---	---	Average
2483.500	32.30	7.99	34.55	39.10	44.84	54.00	9.16	Average
2485.000	32.30	7.99	34.55	38.95	44.69	54.00	9.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

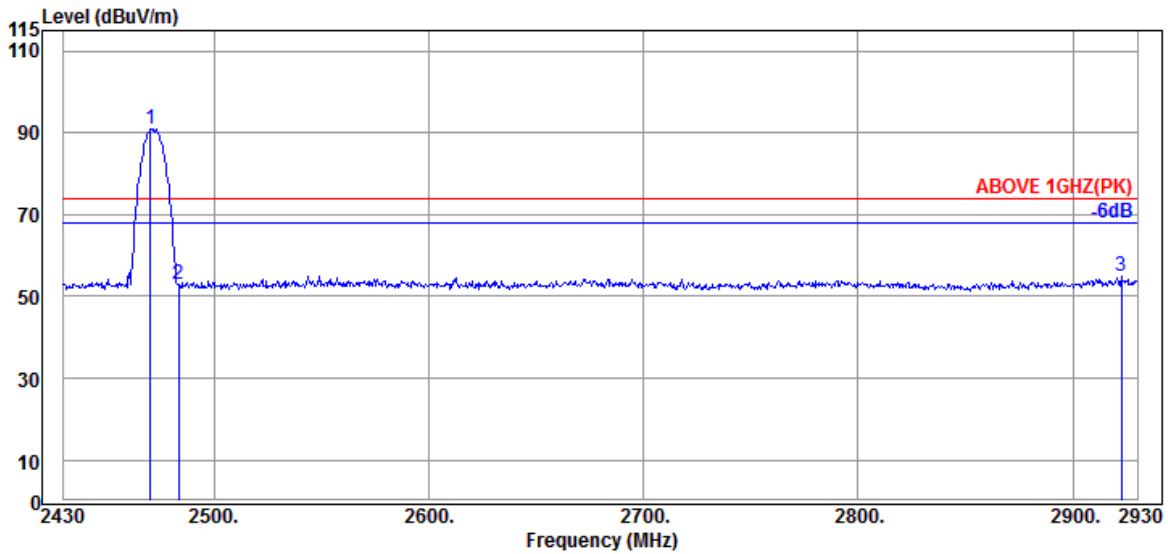

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	85.19	90.93	---	---	Peak
2483.500	32.30	7.99	34.55	47.26	53.00	74.00	21.00	Peak
2922.500	32.90	8.19	34.64	48.47	54.92	74.00	19.08	Peak

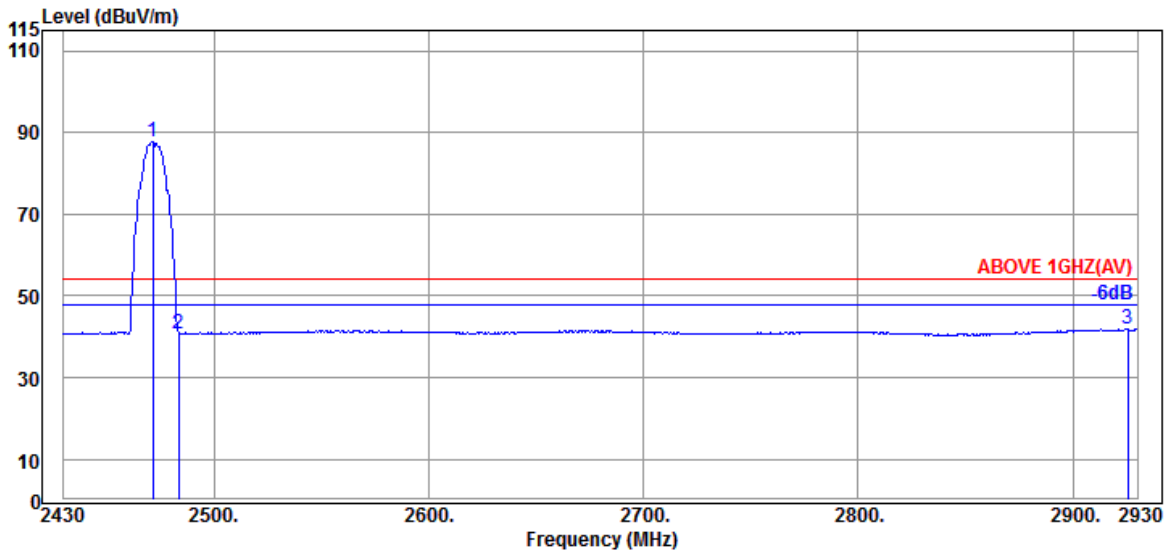


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	82.17	87.91	---	---	Average
2483.500	32.30	7.99	34.55	35.11	40.85	54.00	13.15	Average
2925.500	32.90	8.19	34.65	35.34	41.78	54.00	12.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

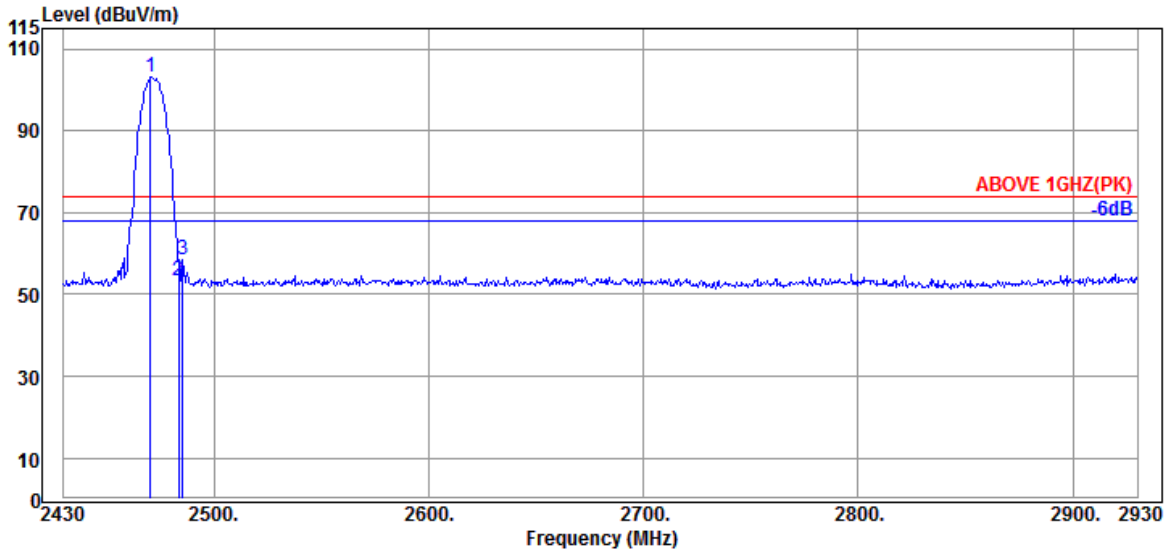

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	97.30	103.04	---	---	Peak
2483.500	32.30	7.99	34.55	47.73	53.47	74.00	20.53	Peak
2485.500	32.30	7.99	34.55	52.87	58.61	74.00	15.39	Peak

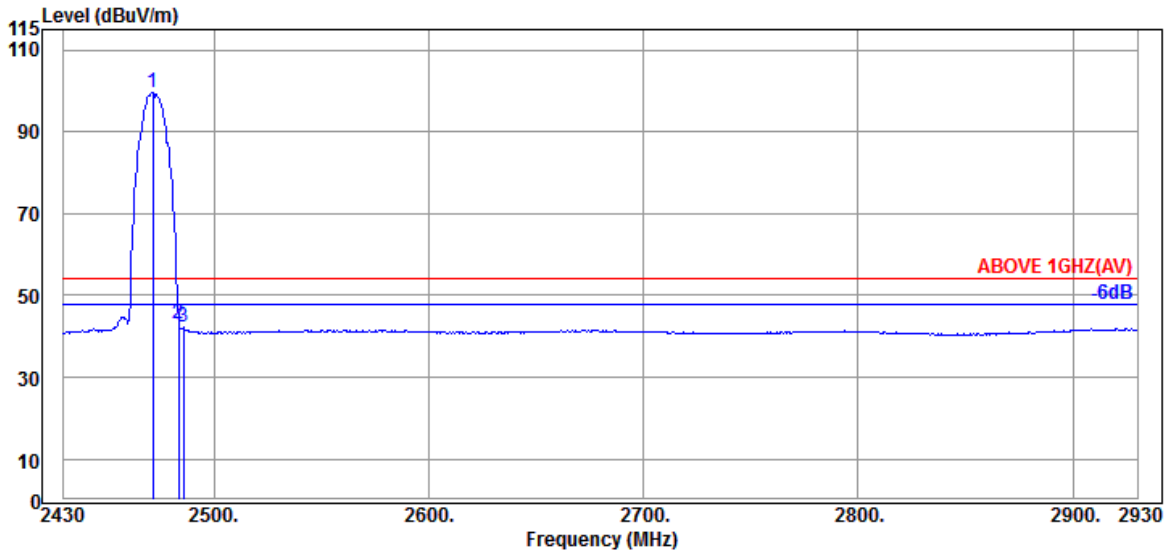


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	93.98	99.72	---	---	Average
2483.500	32.30	7.99	34.55	37.32	43.06	54.00	10.94	Average
2486.000	32.30	8.00	34.55	36.39	42.14	54.00	11.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

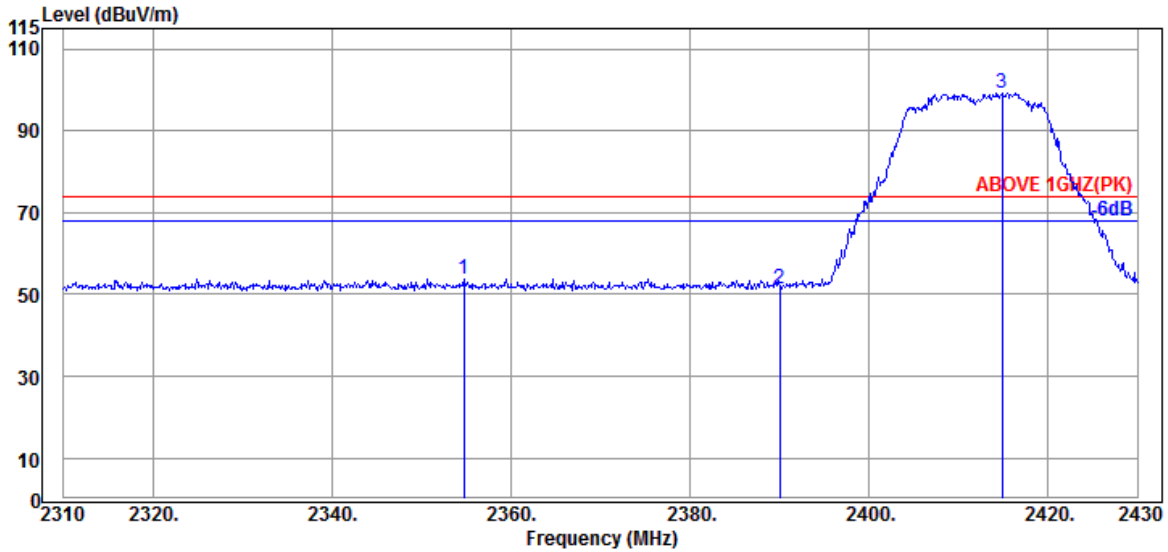

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2354.760	32.10	7.93	34.53	48.24	53.74	74.00	20.26	Peak
2390.040	31.89	7.95	34.54	46.10	51.40	74.00	22.60	Peak
@ 2414.880	31.94	7.96	34.54	93.97	99.33	---	---	Peak

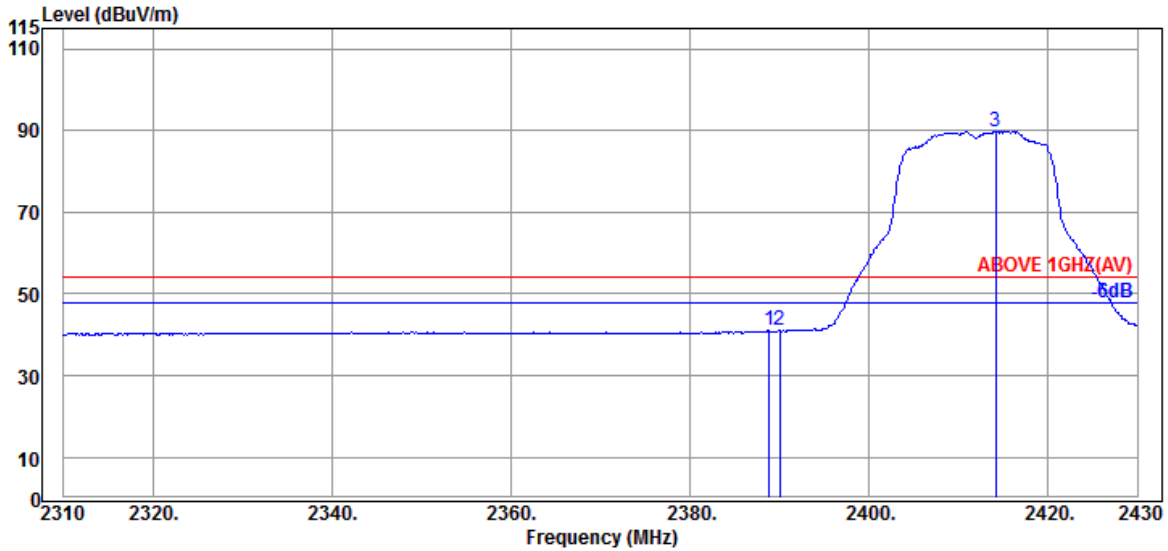


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.840	31.89	7.95	34.53	35.65	40.96	54.00	13.04	Average
2390.040	31.89	7.95	34.54	35.63	40.93	54.00	13.07	Average
@ 2414.160	31.94	7.96	34.54	84.37	89.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

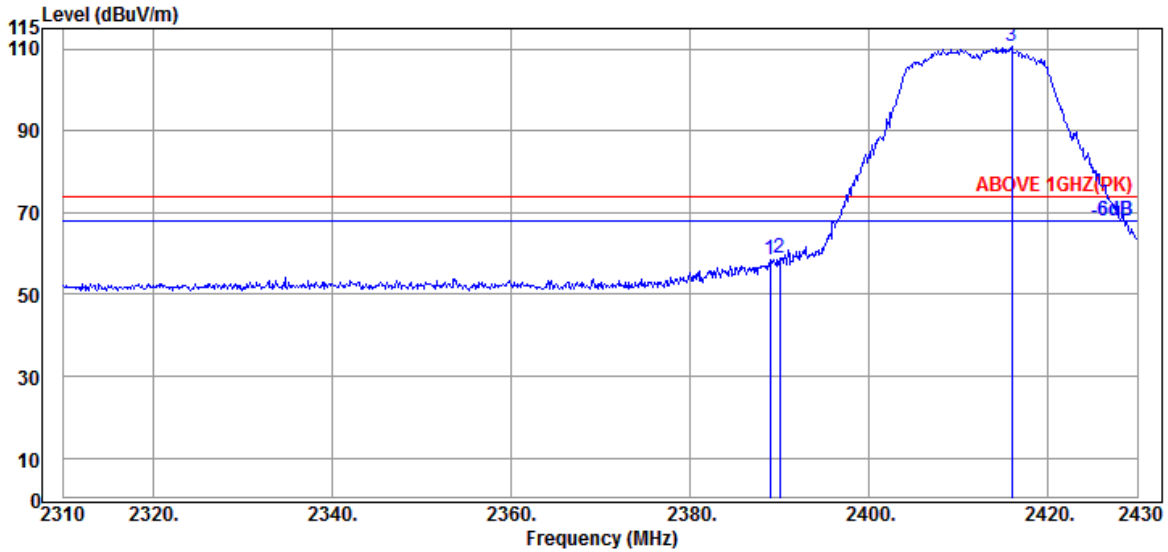

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	53.28	58.59	74.00	15.41	Peak
2390.040	31.89	7.95	34.54	53.39	58.69	74.00	15.31	Peak
@ 2415.960	31.94	7.96	34.54	105.20	110.56	---	---	Peak

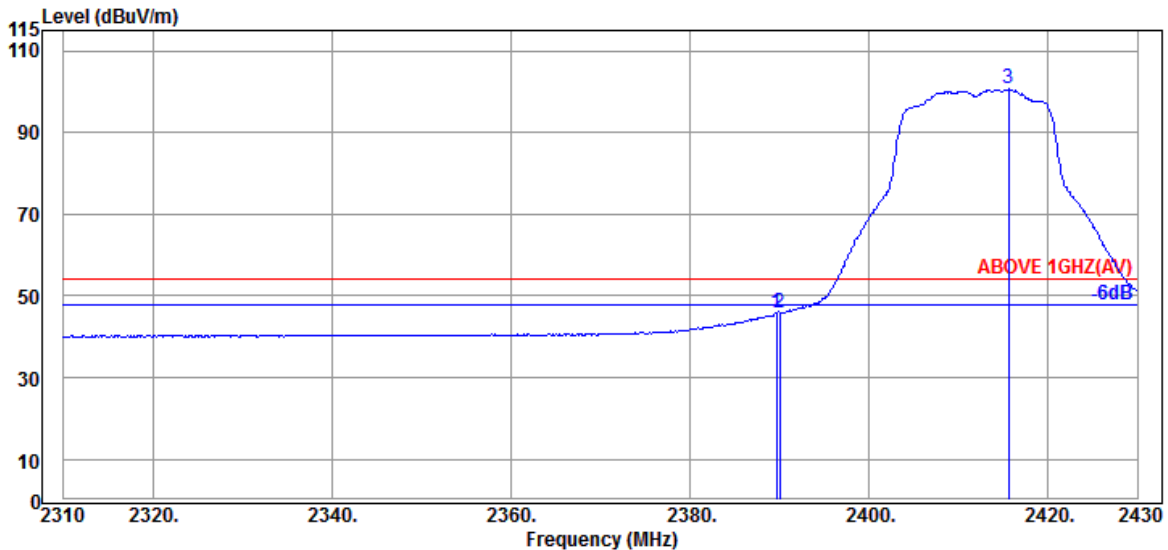


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	40.54	45.85	54.00	8.15	Average
2390.040	31.89	7.95	34.54	40.49	45.79	54.00	8.21	Average
@ 2415.600	31.94	7.96	34.54	95.29	100.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

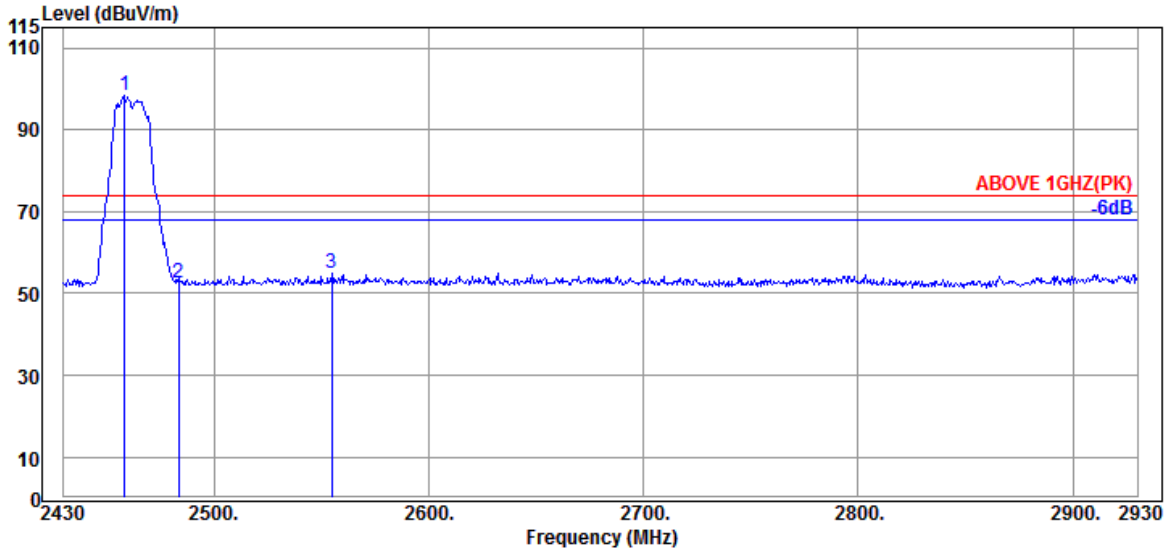

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	92.52	98.25	---	---	Peak
2483.500	32.30	7.99	34.55	46.87	52.61	74.00	21.39	Peak
2555.000	32.50	8.03	34.57	48.96	54.92	74.00	19.08	Peak

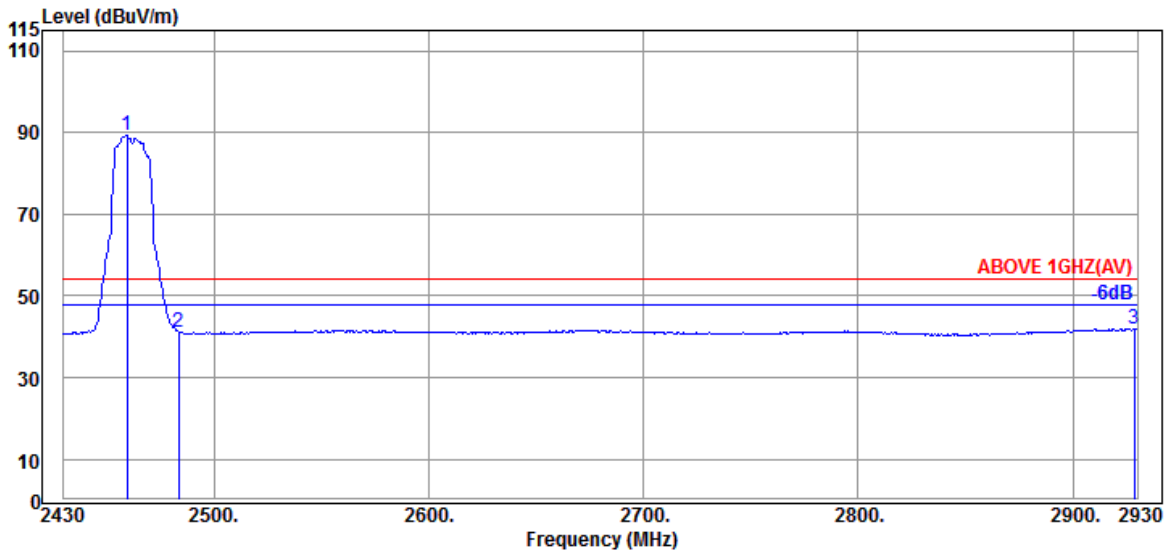


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	83.53	89.26	---	---	Average
2483.500	32.30	7.99	34.55	35.34	41.08	54.00	12.92	Average
2928.500	32.97	8.19	34.65	35.40	41.91	54.00	12.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

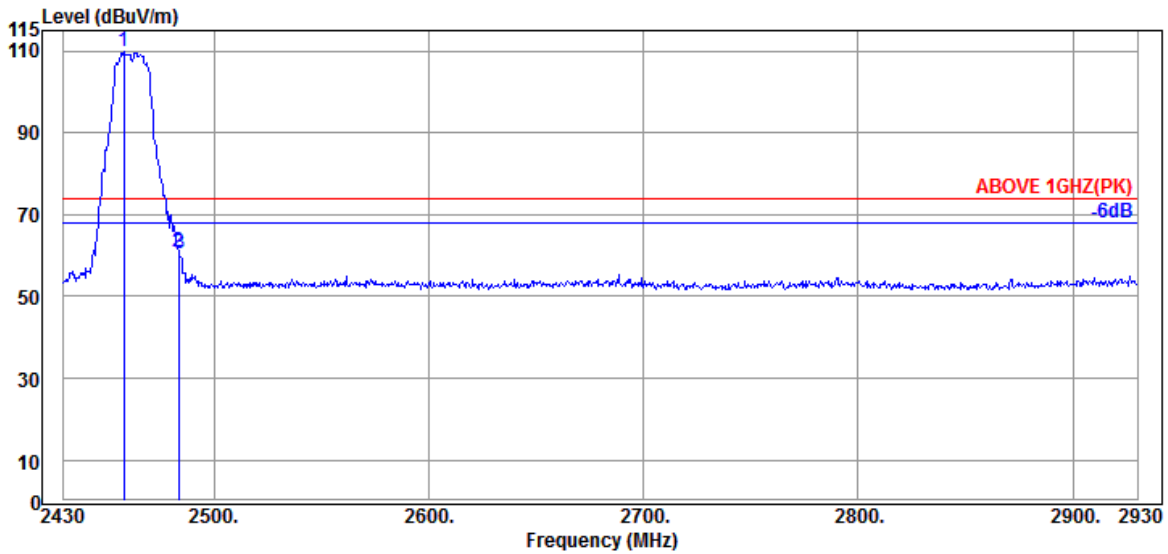

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	104.21	109.94	---	---	Peak
2483.500	32.30	7.99	34.55	55.27	61.01	74.00	12.99	Peak
2484.000	32.30	7.99	34.55	54.90	60.64	74.00	13.36	Peak

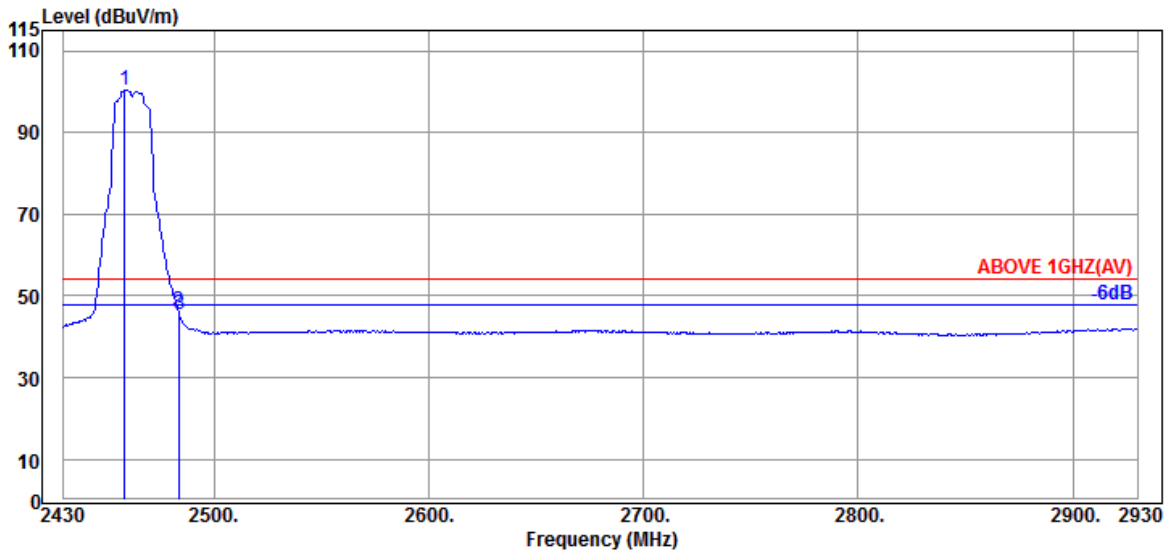


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	94.64	100.37	---	---	Average
2483.500	32.30	7.99	34.55	40.50	46.24	54.00	7.76	Average
2484.000	32.30	7.99	34.55	39.72	45.46	54.00	8.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

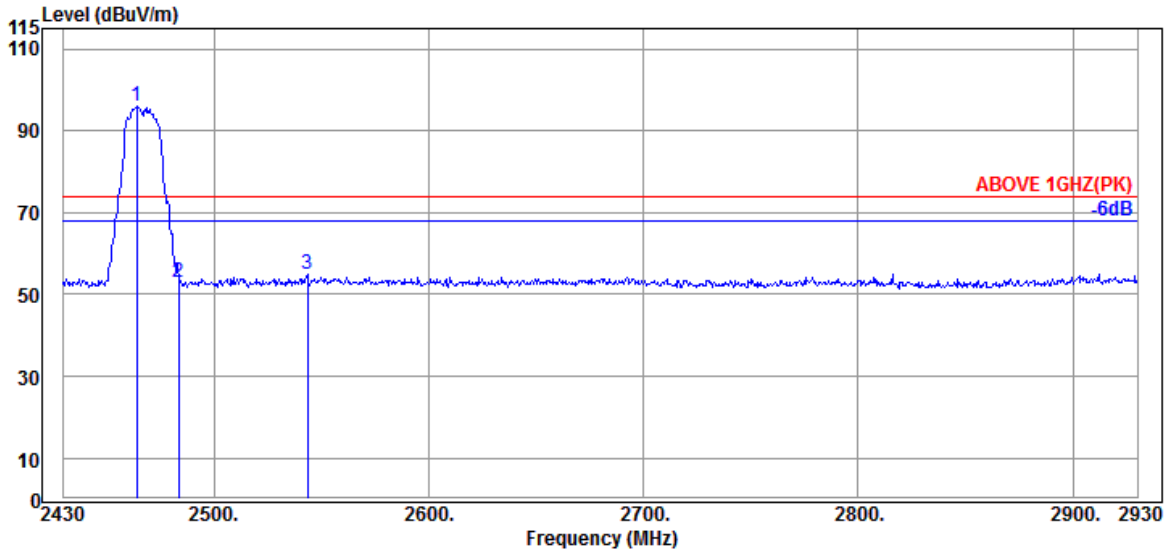

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	90.48	96.21	---	---	Peak
2483.500	32.30	7.99	34.55	47.04	52.78	74.00	21.22	Peak
2543.500	32.47	8.02	34.57	48.96	54.88	74.00	19.12	Peak

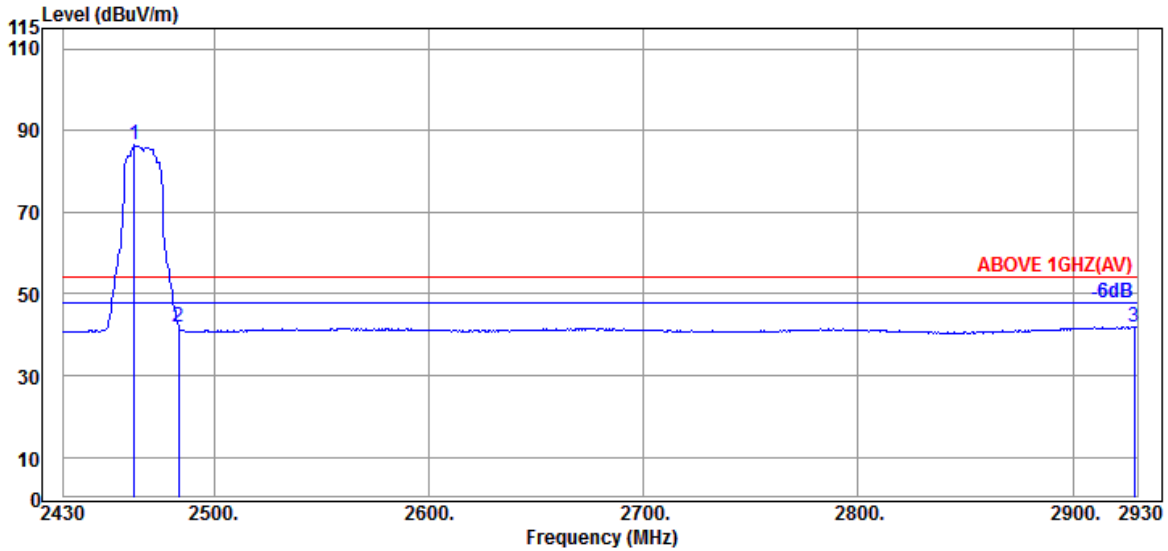


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	80.71	86.44	---	---	Average
2483.500	32.30	7.99	34.55	36.13	41.87	54.00	12.13	Average
2928.500	32.97	8.19	34.65	35.34	41.85	54.00	12.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

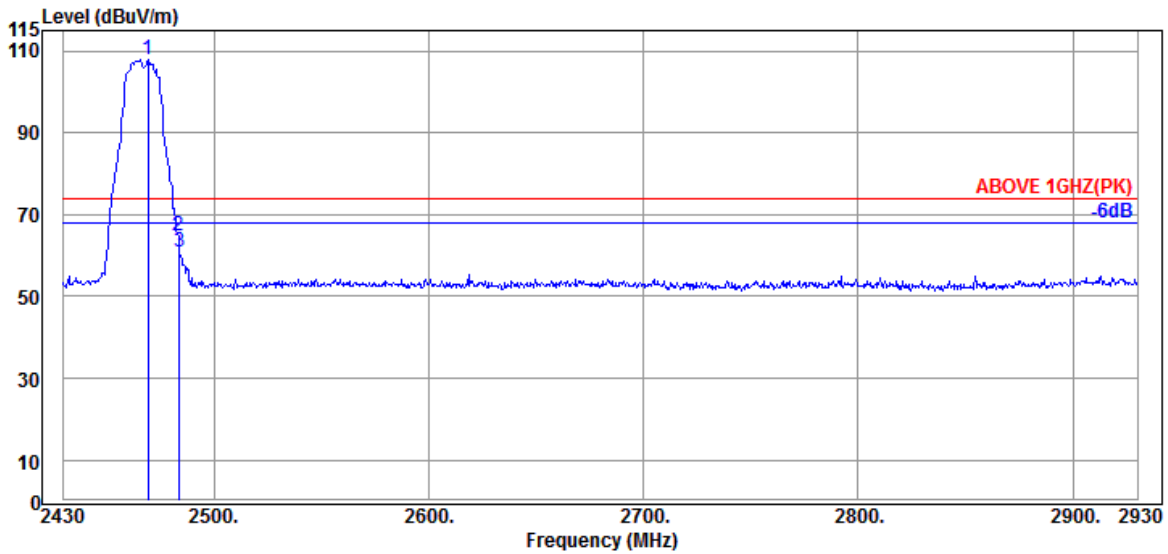

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	102.26	107.99	---	---	Peak
2483.500	32.30	7.99	34.55	59.03	64.77	74.00	9.23	Peak
2484.000	32.30	7.99	34.55	55.23	60.97	74.00	13.03	Peak

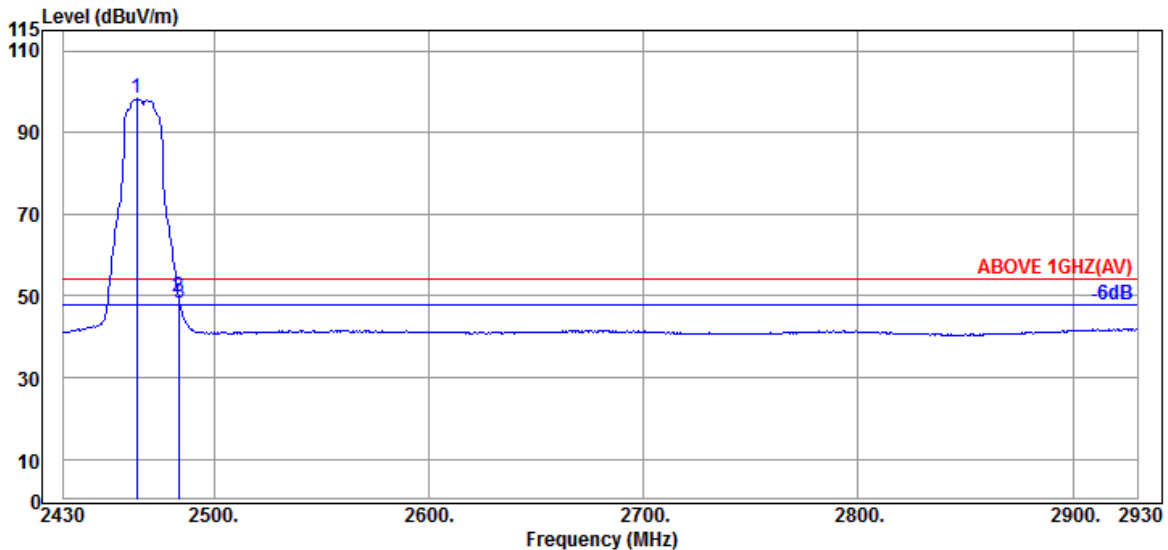


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	92.62	98.35	---	---	Average
2483.500	32.30	7.99	34.55	44.07	49.81	54.00	4.19	Average
2484.000	32.30	7.99	34.55	42.44	48.18	54.00	5.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

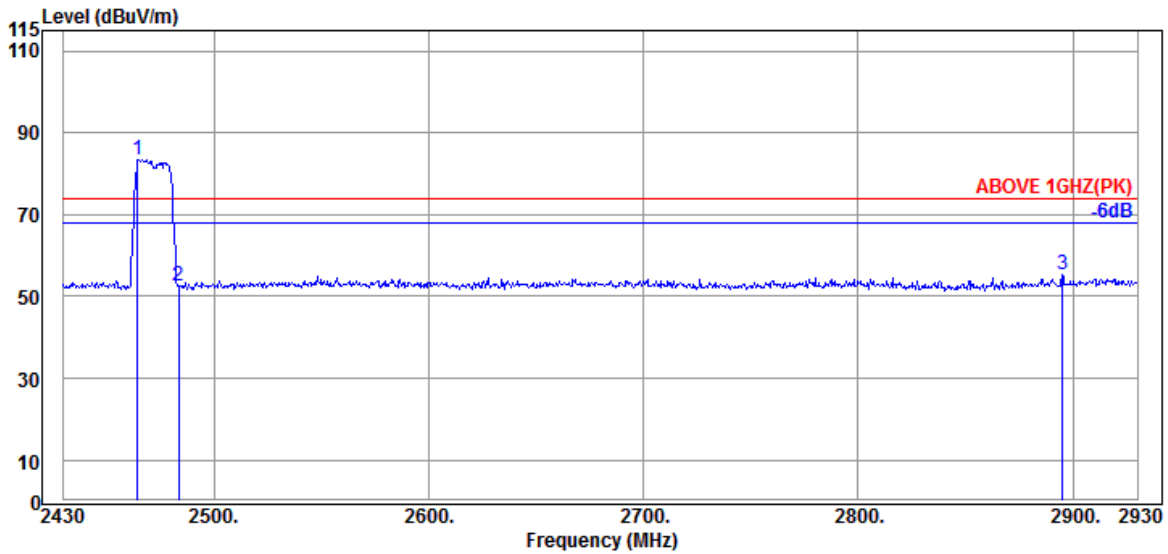

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	77.80	83.53	---	---	Peak
2483.500	32.30	7.99	34.55	46.86	52.60	74.00	21.40	Peak
2895.000	32.70	8.17	34.64	48.91	55.14	74.00	18.86	Peak

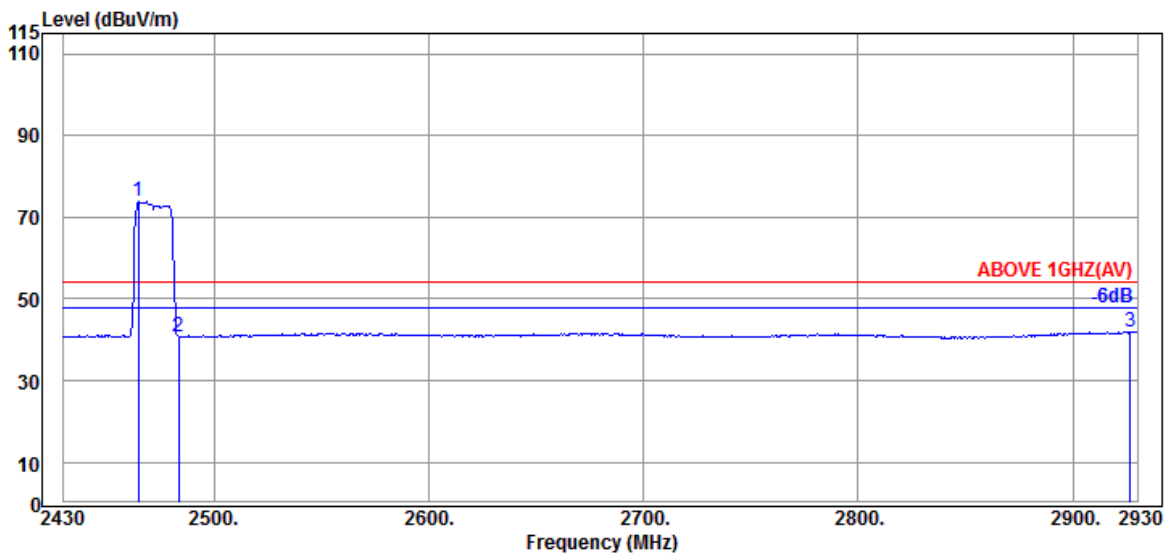


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	68.18	73.91	---	---	Average
2483.500	32.30	7.99	34.55	34.99	40.73	54.00	13.27	Average
2926.500	32.97	8.19	34.65	35.42	41.93	54.00	12.07	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

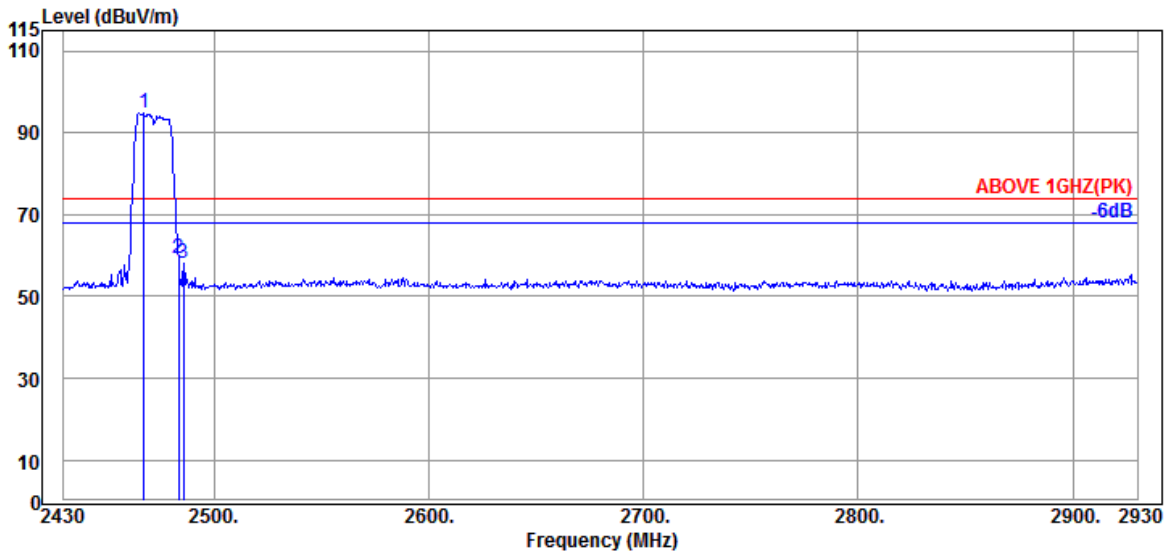

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	89.26	94.99	---	---	Peak
2483.500	32.30	7.99	34.55	53.52	59.26	74.00	14.74	Peak
2486.000	32.30	8.00	34.55	52.21	57.96	74.00	16.04	Peak

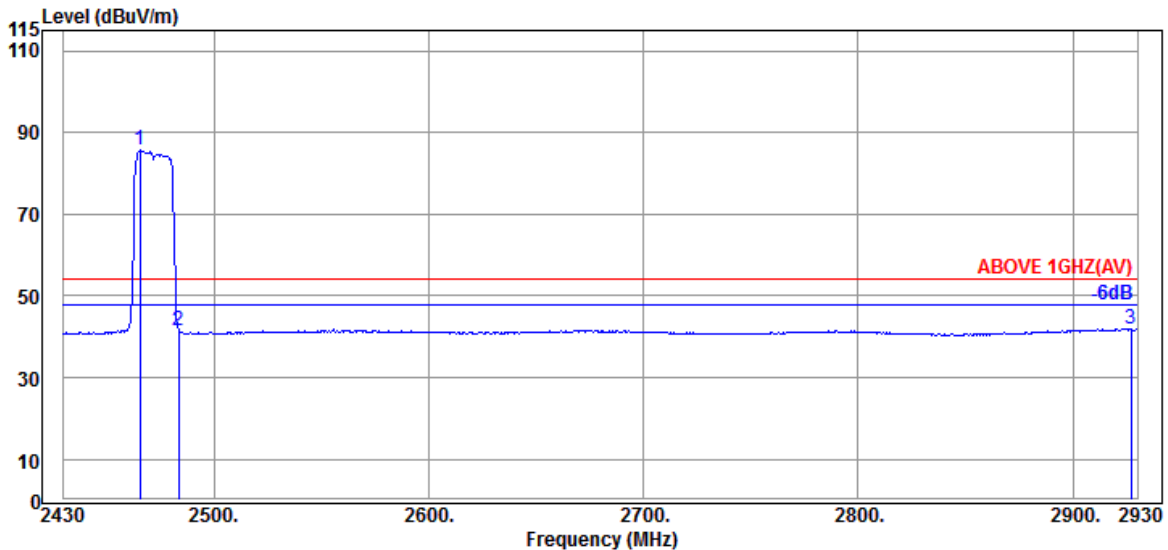


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	79.87	85.60	---	---	Average
2483.500	32.30	7.99	34.55	35.90	41.64	54.00	12.36	Average
2927.000	32.97	8.19	34.65	35.30	41.81	54.00	12.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

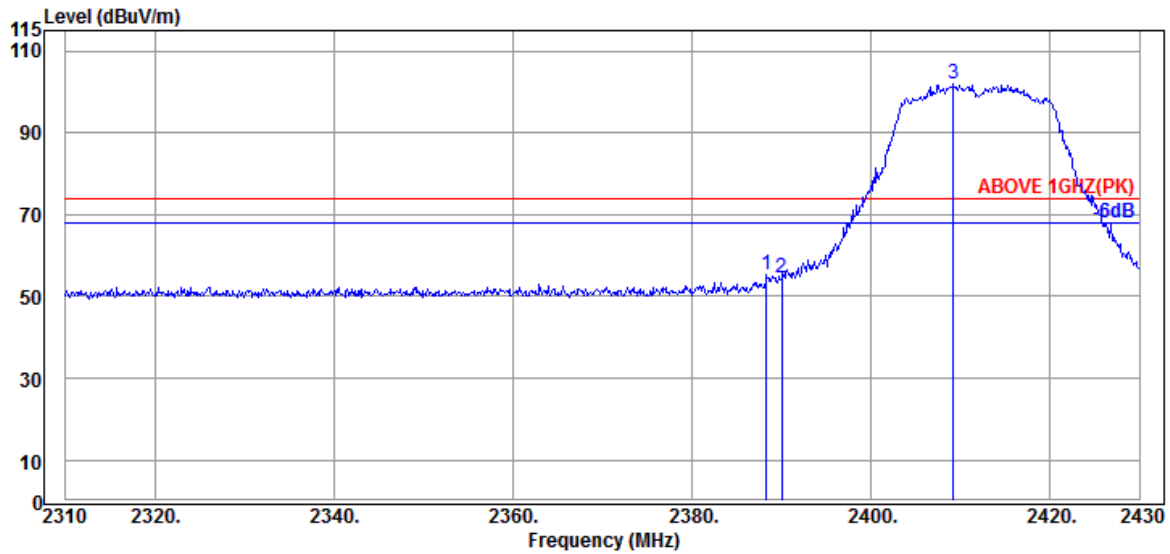

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	31.89	7.95	34.53	49.91	55.22	74.00	18.78	Peak
2390.040	31.89	7.95	34.54	49.28	54.58	74.00	19.42	Peak
@ 2409.240	31.87	7.96	34.54	96.60	101.89	---	---	Peak

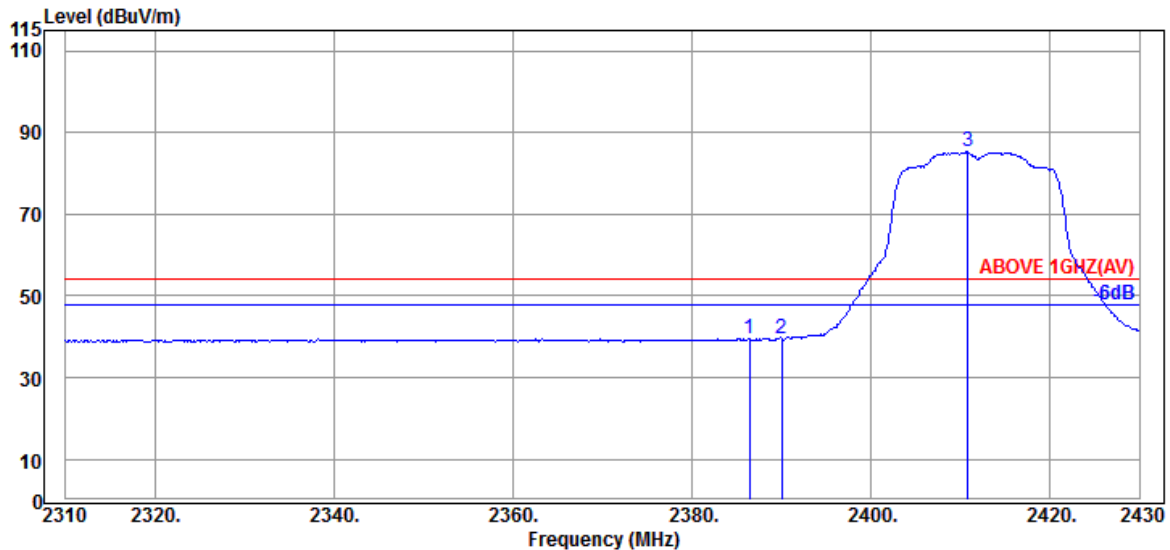


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.440	31.89	7.95	34.53	34.39	39.70	54.00	14.30	Average
2390.040	31.89	7.95	34.54	34.34	39.64	54.00	14.36	Average
@ 2410.800	31.87	7.96	34.54	79.97	85.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

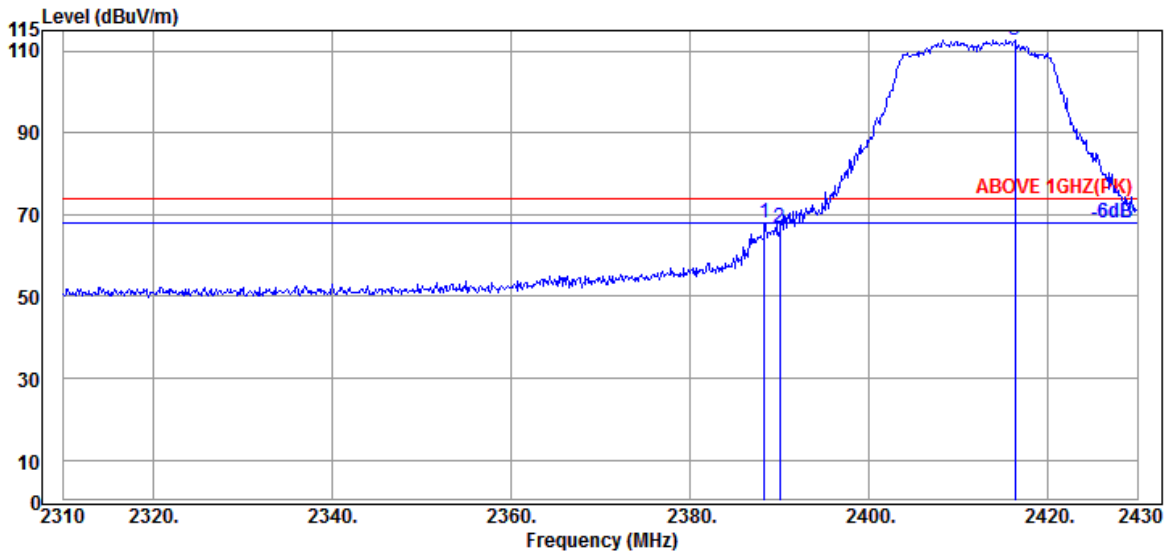

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	31.89	7.95	34.53	62.84	68.15	74.00	5.85	Peak
2390.040	31.89	7.95	34.54	61.32	66.62	74.00	7.38	Peak
@ 2416.320	31.94	7.96	34.54	107.23	112.59	---	---	Peak

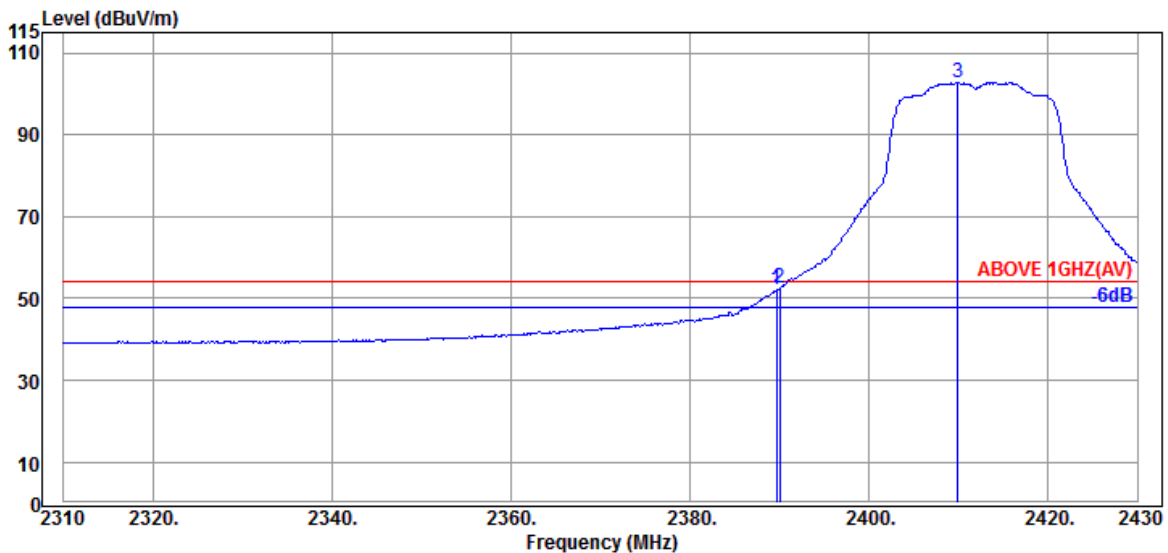


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	46.72	52.03	54.00	1.97	Average
2390.040	31.89	7.95	34.54	47.11	52.41	54.00	1.59	Average
@ 2409.960	31.87	7.96	34.54	97.46	102.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

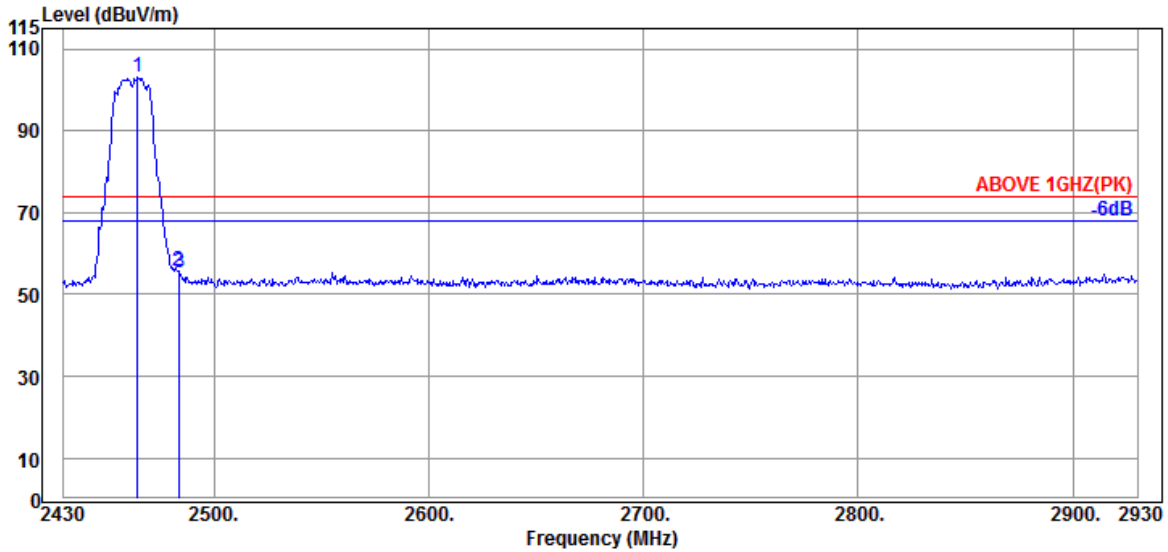

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	97.43	103.16	---	---	Peak
2483.500	32.30	7.99	34.55	49.92	55.66	74.00	18.34	Peak
2484.000	32.30	7.99	34.55	49.56	55.30	74.00	18.70	Peak

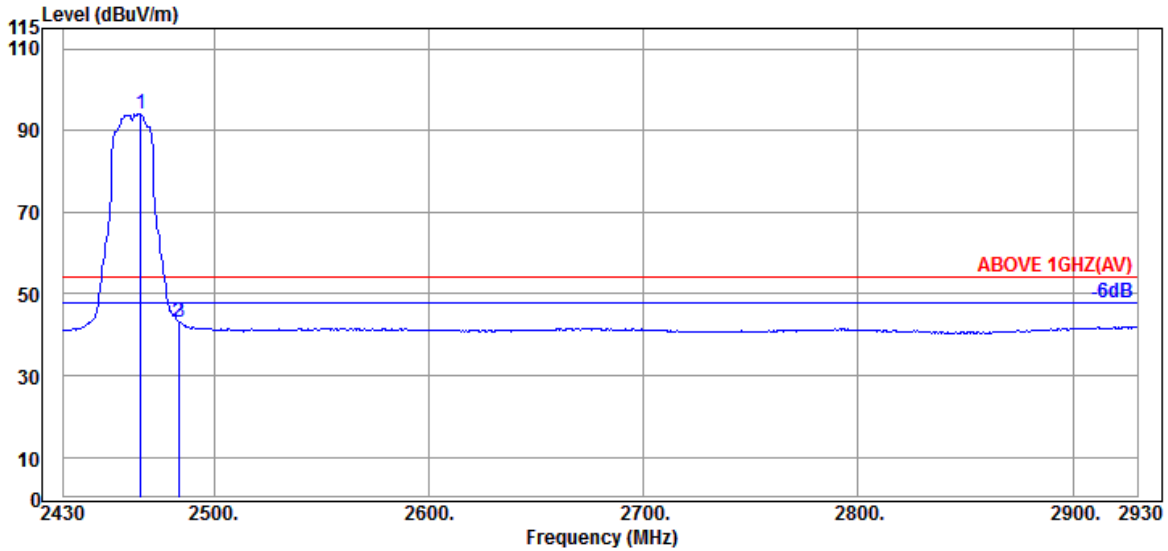


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	88.48	94.21	---	---	Average
2483.500	32.30	7.99	34.55	37.48	43.22	54.00	10.78	Average
2484.000	32.30	7.99	34.55	37.42	43.16	54.00	10.84	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

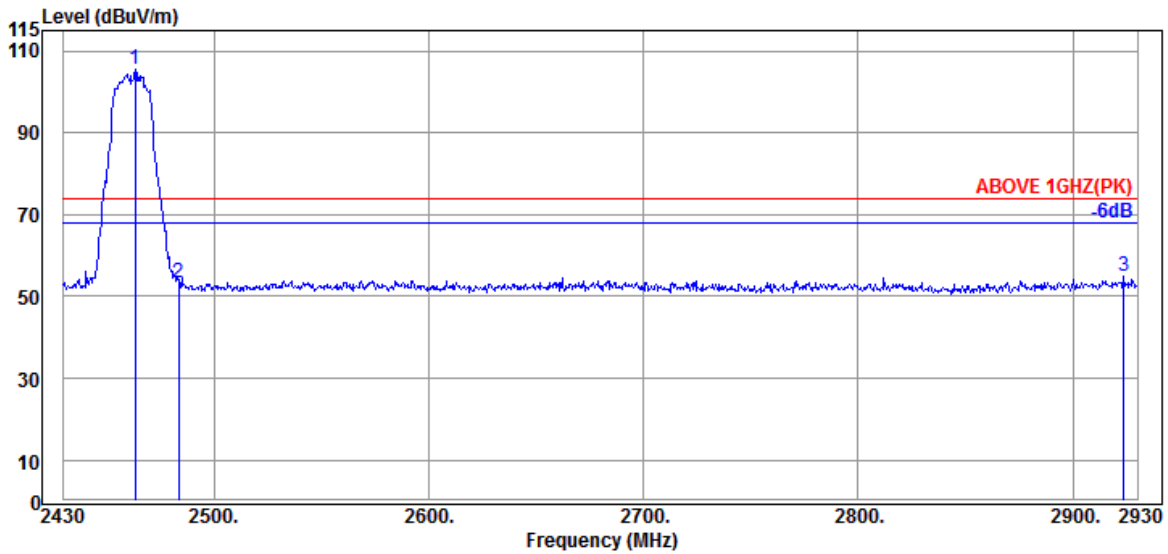

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	99.61	105.34	---	---	Peak
2483.500	32.30	7.99	34.55	47.63	53.37	74.00	20.63	Peak
2923.500	32.90	8.19	34.64	48.38	54.83	74.00	19.17	Peak

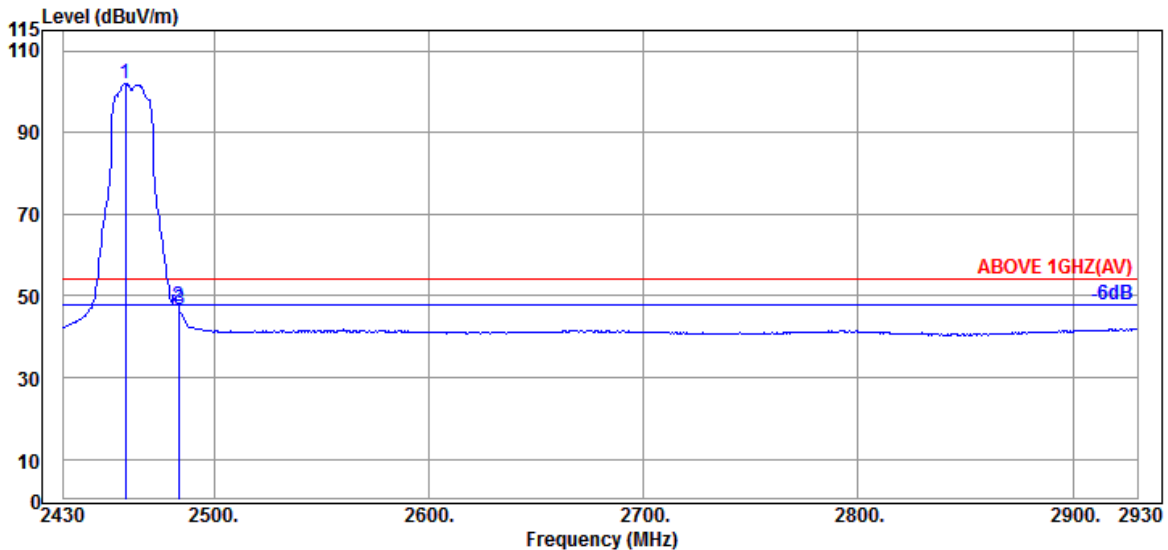


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	96.39	102.12	---	---	Average
2483.500	32.30	7.99	34.55	41.49	47.23	54.00	6.77	Average
2484.000	32.30	7.99	34.55	40.72	46.46	54.00	7.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

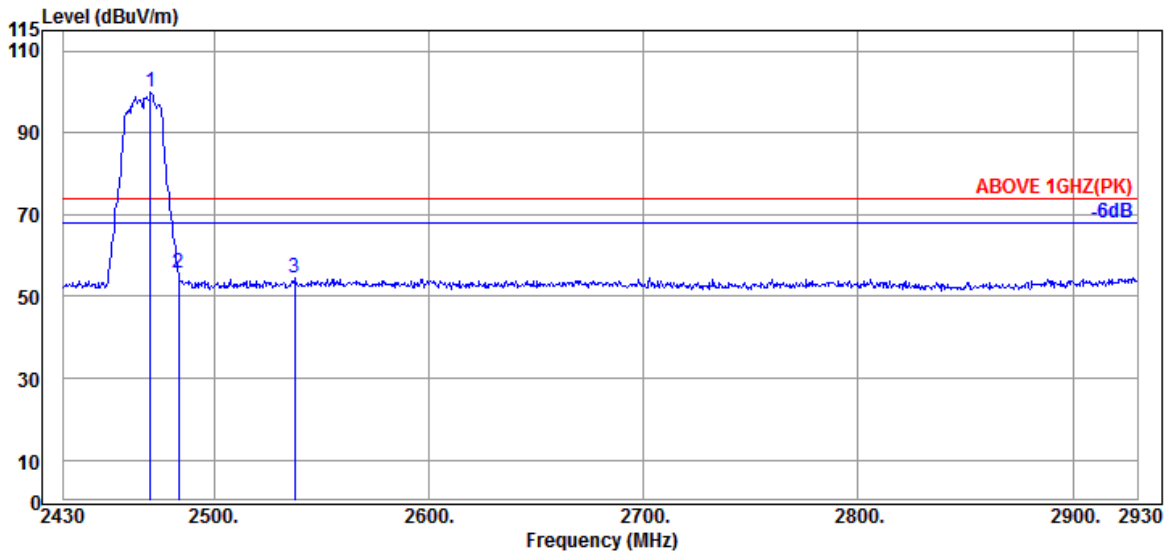

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	94.09	99.83	---	---	Peak
2483.500	32.30	7.99	34.55	49.79	55.53	74.00	18.47	Peak
2537.500	32.44	8.02	34.57	48.69	54.58	74.00	19.42	Peak

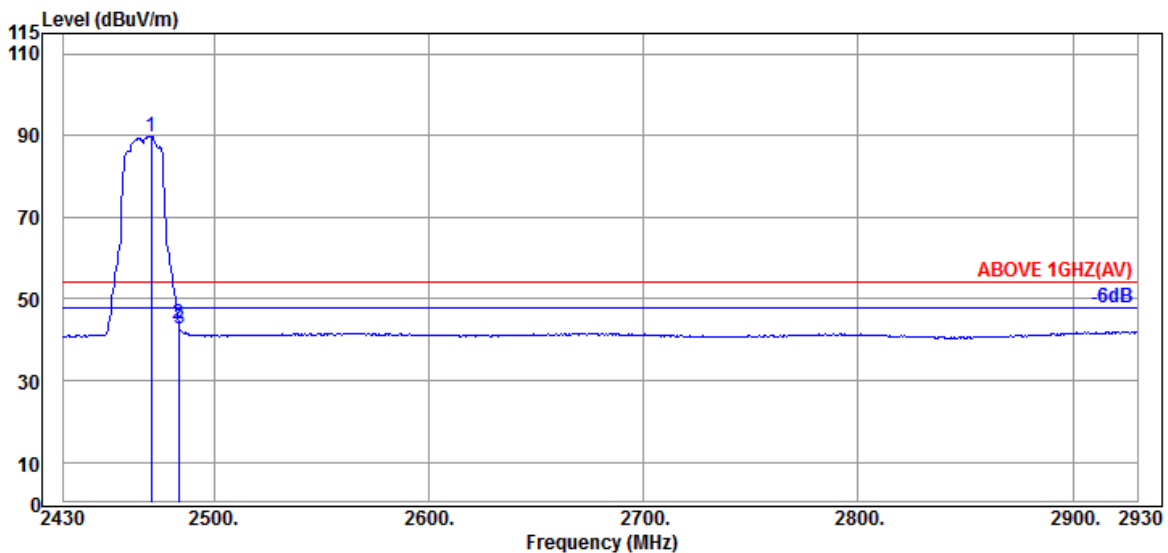


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	84.09	89.83	---	---	Average
2483.500	32.30	7.99	34.55	38.17	43.91	54.00	10.09	Average
2484.000	32.30	7.99	34.55	37.08	42.82	54.00	11.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

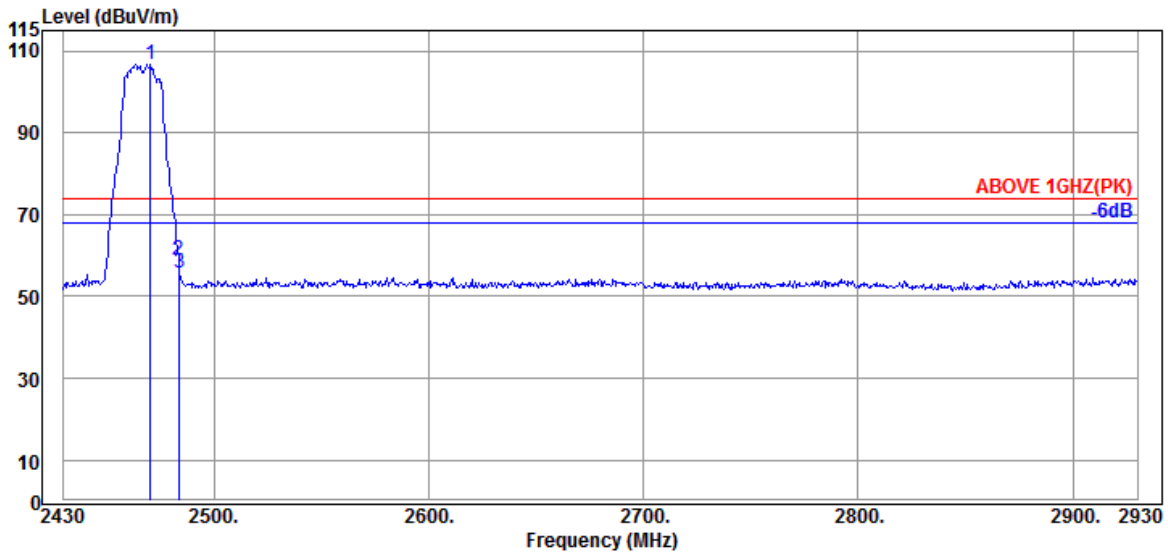

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	101.15	106.89	---	---	Peak
2483.500	32.30	7.99	34.55	53.28	59.02	74.00	14.98	Peak
2484.000	32.30	7.99	34.55	50.02	55.76	74.00	18.24	Peak

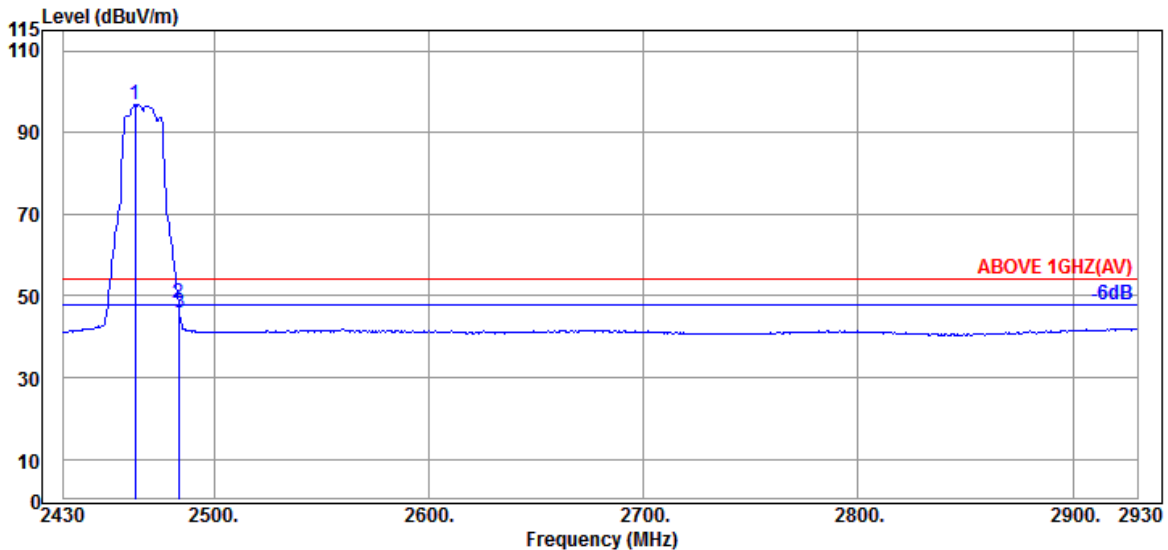


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	91.03	96.76	---	---	Average
2483.500	32.30	7.99	34.55	42.31	48.05	54.00	5.95	Average
2484.000	32.30	7.99	34.55	40.21	45.95	54.00	8.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

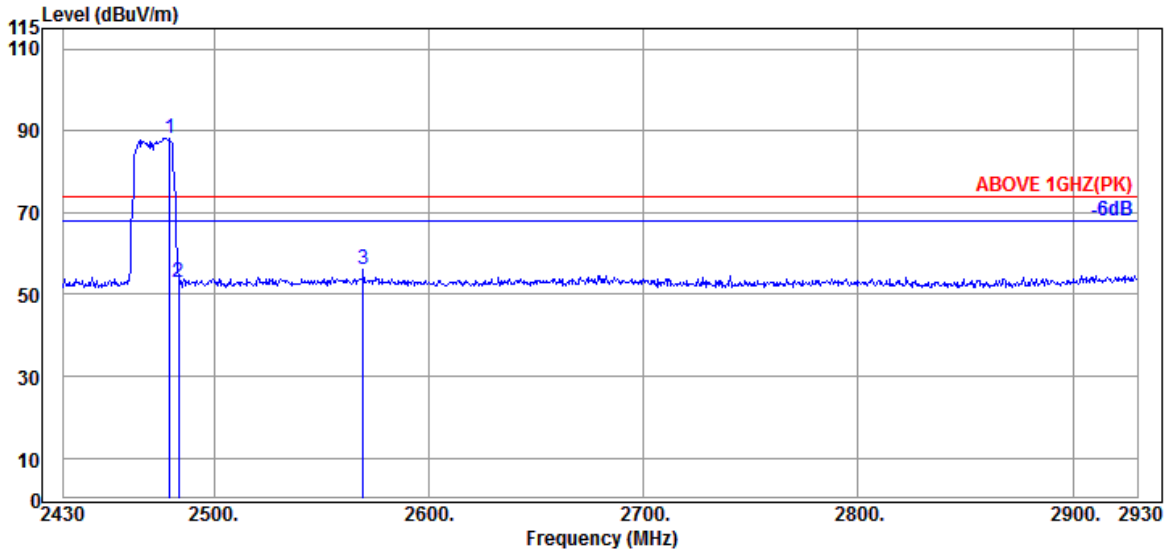

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	82.48	88.22	---	---	Peak
2483.500	32.30	7.99	34.55	47.23	52.97	74.00	21.03	Peak
2569.500	32.50	8.04	34.58	50.03	55.99	74.00	18.01	Peak

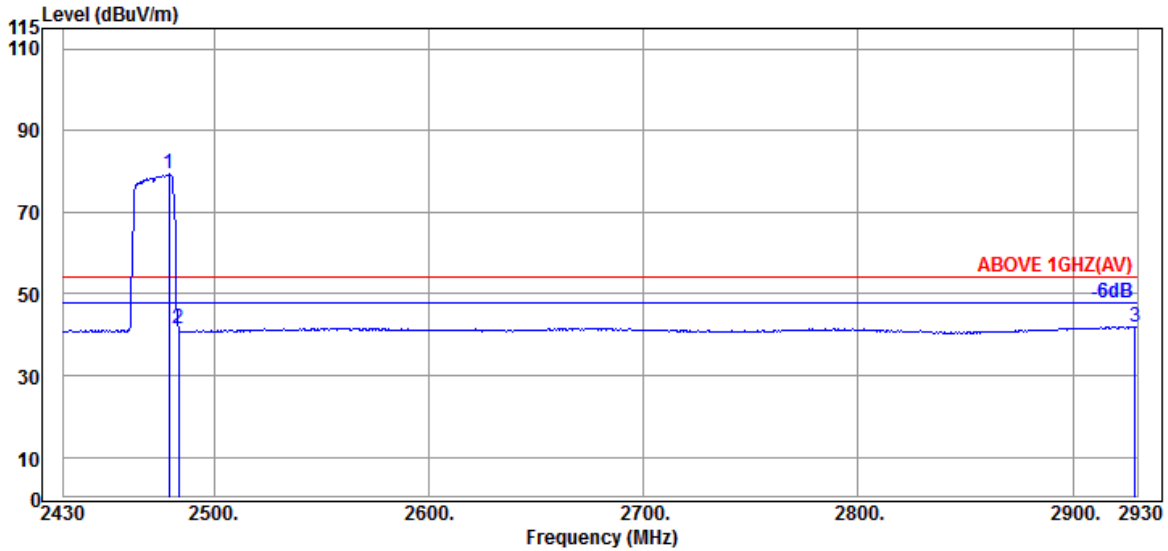


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	73.52	79.26	---	---	Average
2483.500	32.30	7.99	34.55	35.75	41.49	54.00	12.51	Average
2929.000	32.97	8.19	34.65	35.50	42.01	54.00	11.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

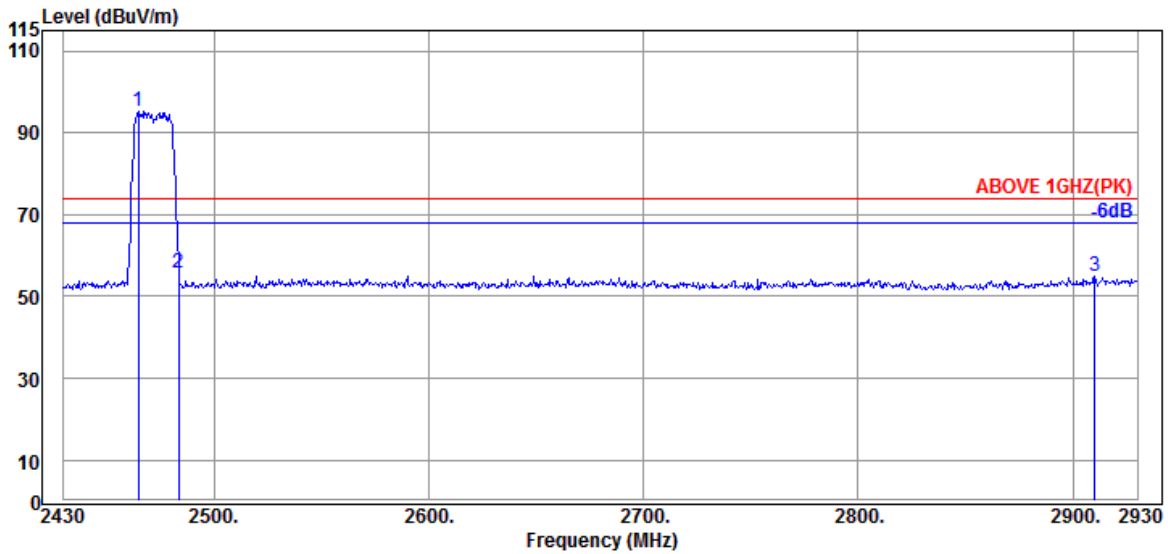

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	89.46	95.19	---	---	Peak
2483.500	32.30	7.99	34.55	49.85	55.59	74.00	18.41	Peak
2910.000	32.83	8.18	34.64	48.60	54.97	74.00	19.03	Peak

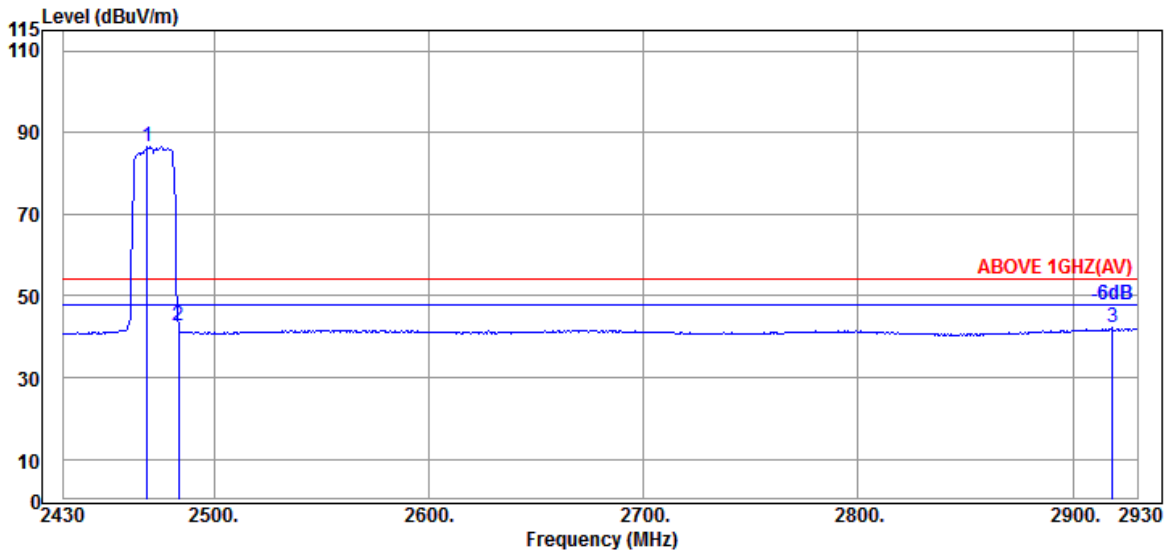


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	32.30	7.98	34.55	80.74	86.47	---	---	Average
2483.500	32.30	7.99	34.55	37.03	42.77	54.00	11.23	Average
2918.500	32.90	8.19	34.64	35.68	42.13	54.00	11.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

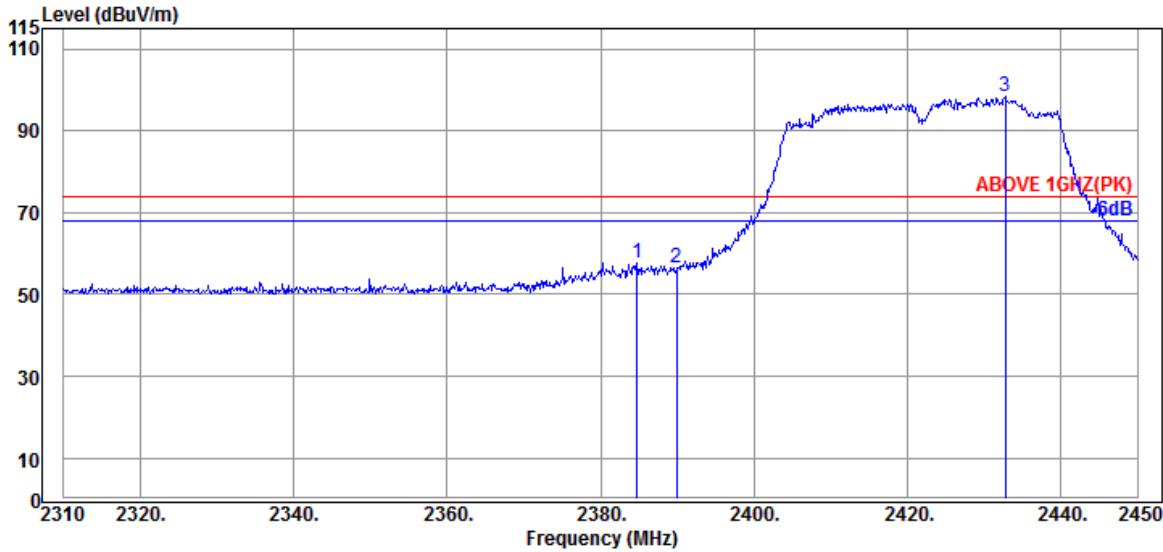

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.760	31.89	7.95	34.53	52.49	57.80	74.00	16.20	Peak
2389.940	31.89	7.95	34.54	51.19	56.49	74.00	17.51	Peak
@ 2432.780	32.16	7.97	34.54	92.73	98.32	---	---	Peak

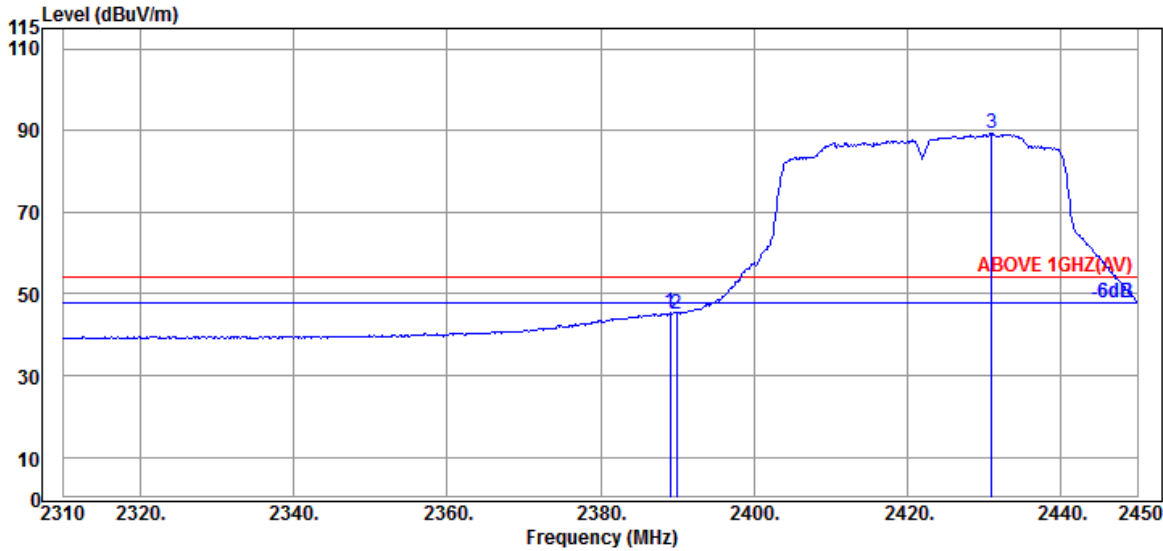


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	31.89	7.95	34.53	40.00	45.31	54.00	8.69	Average
2389.940	31.89	7.95	34.54	39.89	45.19	54.00	8.81	Average
@ 2430.960	32.09	7.97	34.54	83.69	89.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

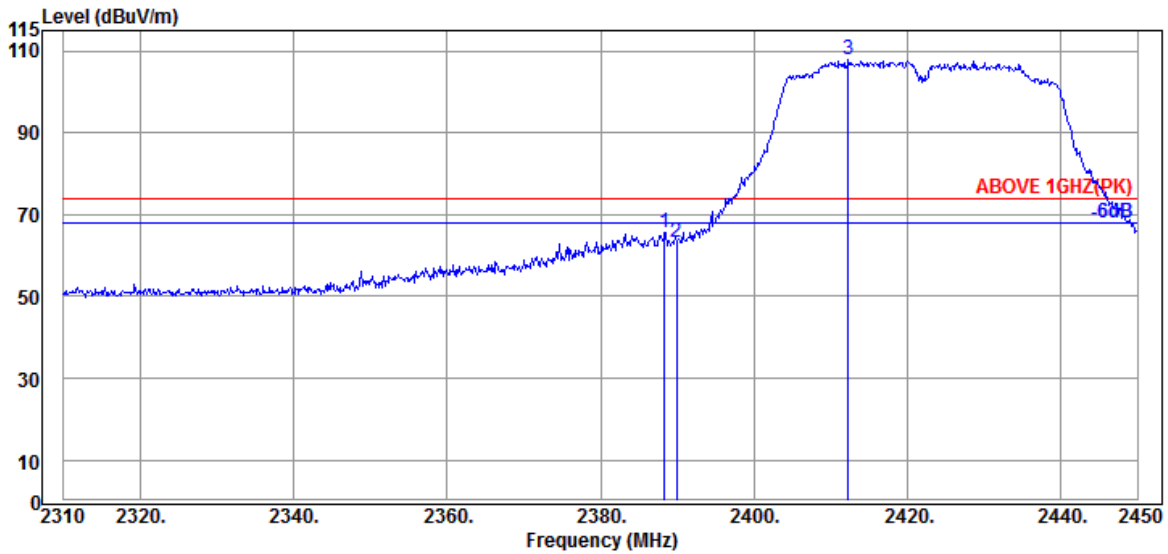

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	31.89	7.95	34.53	60.36	65.67	74.00	8.33	Peak
2389.940	31.89	7.95	34.54	57.90	63.20	74.00	10.80	Peak
@ 2412.340	31.94	7.96	34.54	102.41	107.77	---	---	Peak

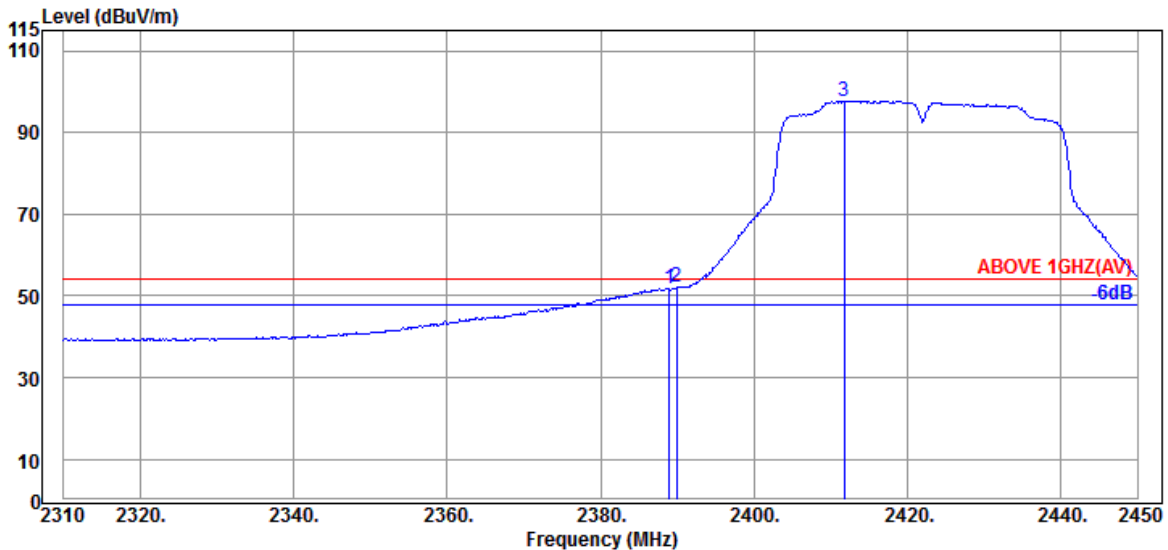


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	46.56	51.87	54.00	2.13	Average
2389.940	31.89	7.95	34.54	46.71	52.01	54.00	1.99	Average
@ 2411.780	31.94	7.96	34.54	92.41	97.77	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

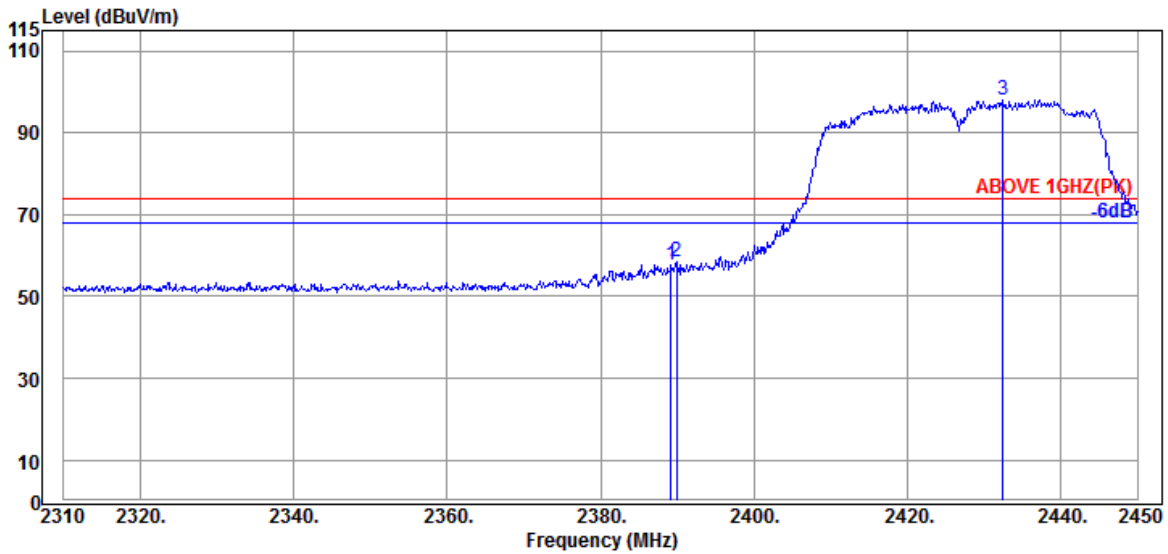

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.240	31.89	7.95	34.53	52.40	57.71	74.00	16.29	Peak
2389.940	31.89	7.95	34.54	53.01	58.31	74.00	15.69	Peak
@ 2432.500	32.16	7.97	34.54	92.51	98.10	---	---	Peak

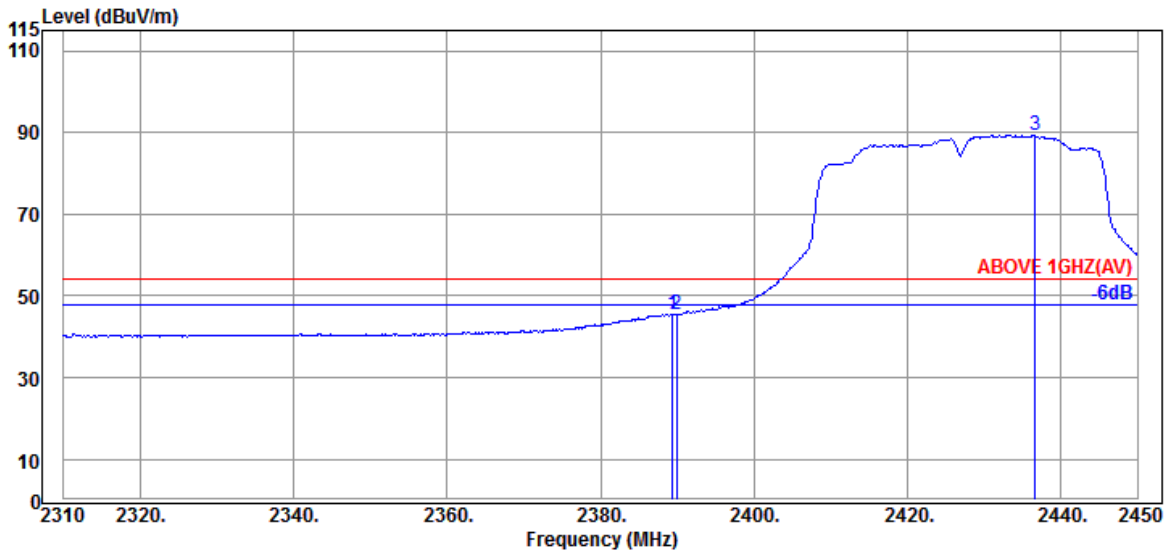


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.380	31.89	7.95	34.53	40.22	45.53	54.00	8.47	Average
2389.940	31.89	7.95	34.54	40.23	45.53	54.00	8.47	Average
@ 2436.700	32.16	7.97	34.54	83.77	89.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

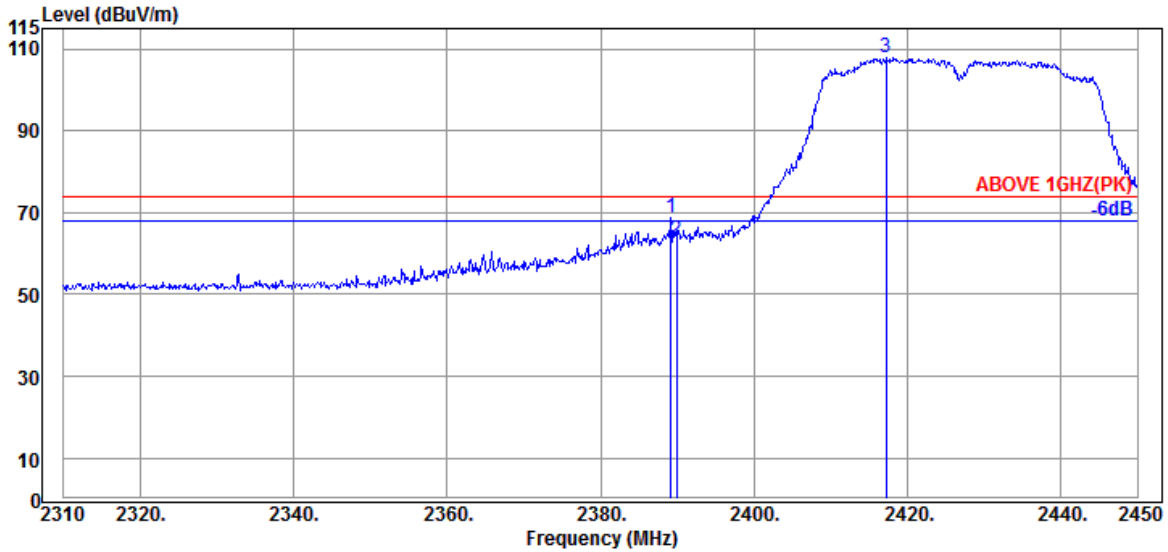

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.240	31.89	7.95	34.53	63.48	68.79	74.00	5.21	Peak
2389.940	31.89	7.95	34.54	57.91	63.21	74.00	10.79	Peak
@ 2417.240	31.94	7.96	34.54	102.52	107.88	---	---	Peak

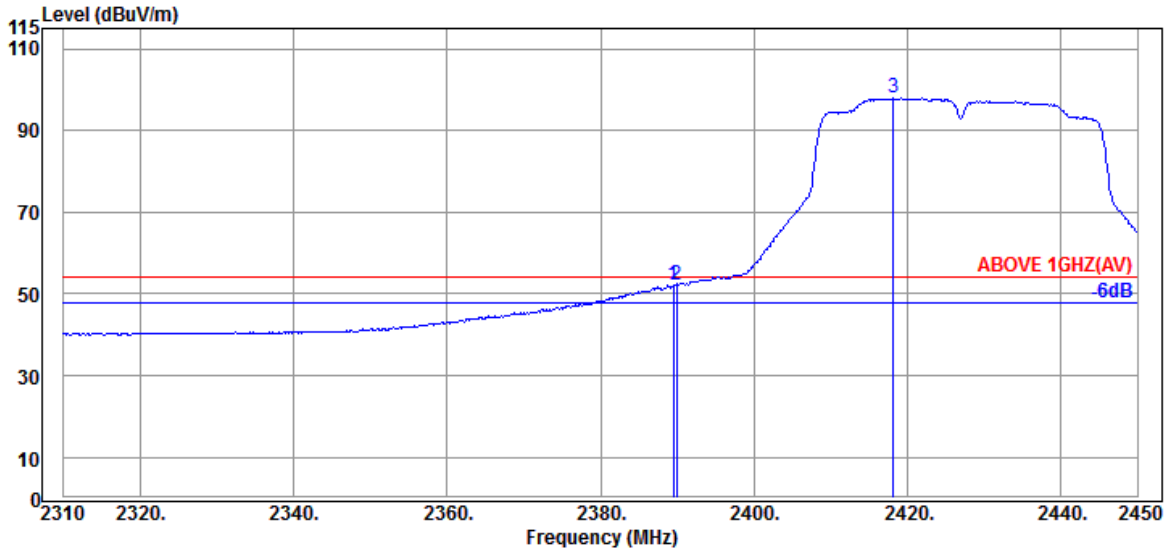


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.520	31.89	7.95	34.53	46.96	52.27	54.00	1.73	Average
2389.940	31.89	7.95	34.54	47.05	52.35	54.00	1.65	Average
@ 2418.220	32.01	7.96	34.54	92.46	97.89	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

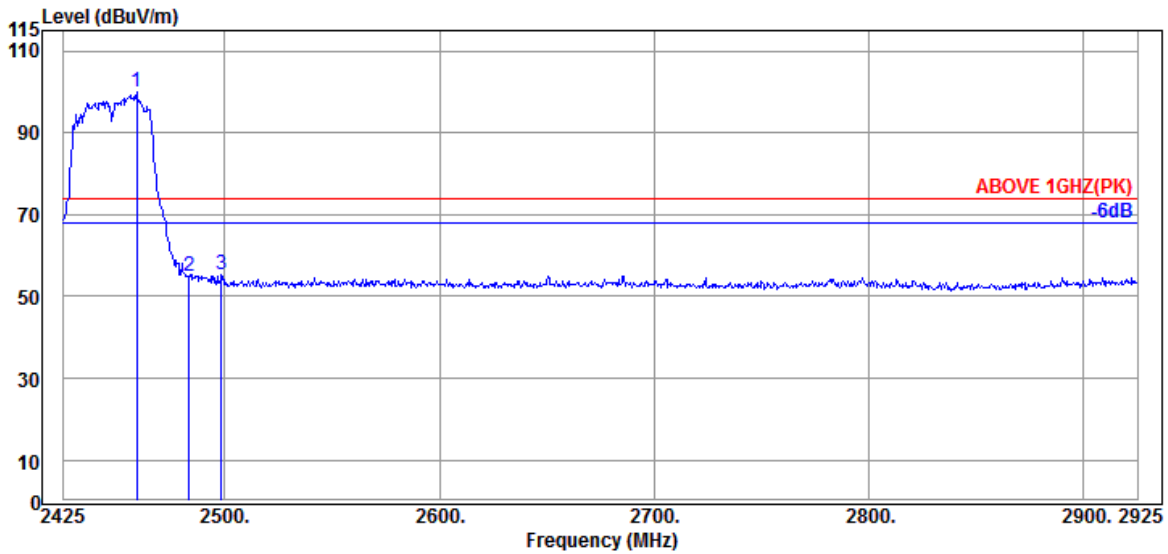

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	94.09	99.82	---	---	Peak
2483.500	32.30	7.99	34.55	49.30	55.04	74.00	18.96	Peak
2498.500	32.30	8.00	34.56	49.66	55.40	74.00	18.60	Peak

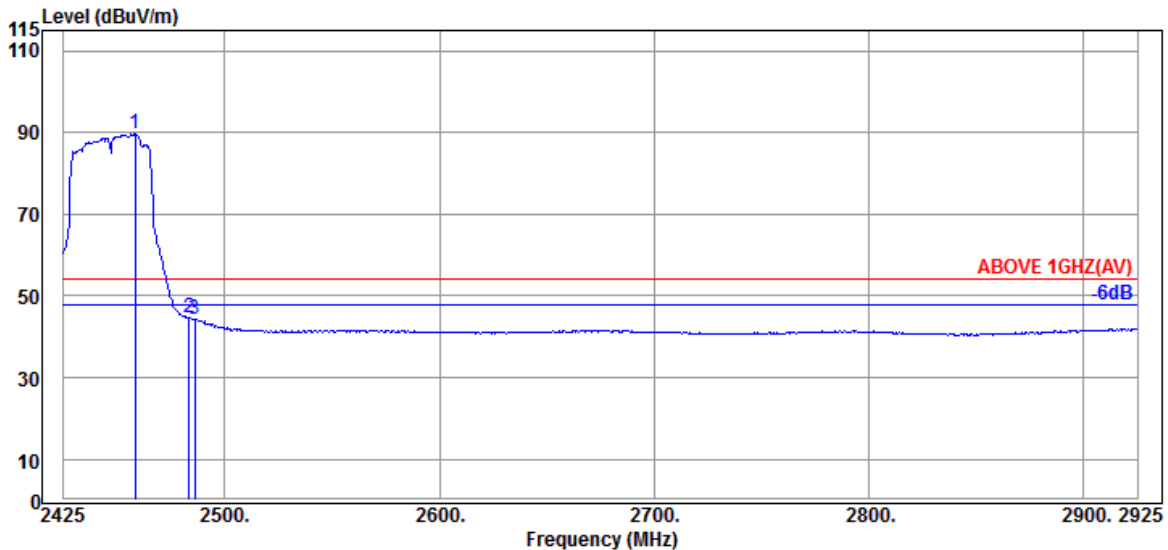


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	84.04	89.77	---	---	Average
2483.500	32.30	7.99	34.55	38.83	44.57	54.00	9.43	Average
2486.000	32.30	8.00	34.55	38.68	44.43	54.00	9.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

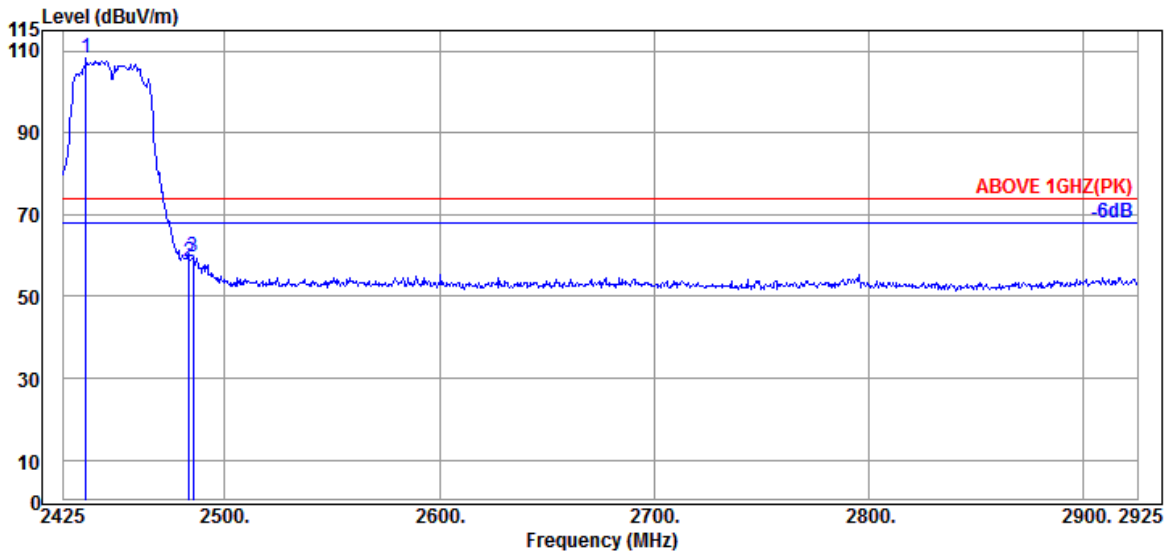

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2435.500	32.16	7.97	34.54	102.52	108.11	---	---	Peak
2483.500	32.30	7.99	34.55	52.74	58.48	74.00	15.52	Peak
2485.500	32.30	7.99	34.55	53.77	59.51	74.00	14.49	Peak

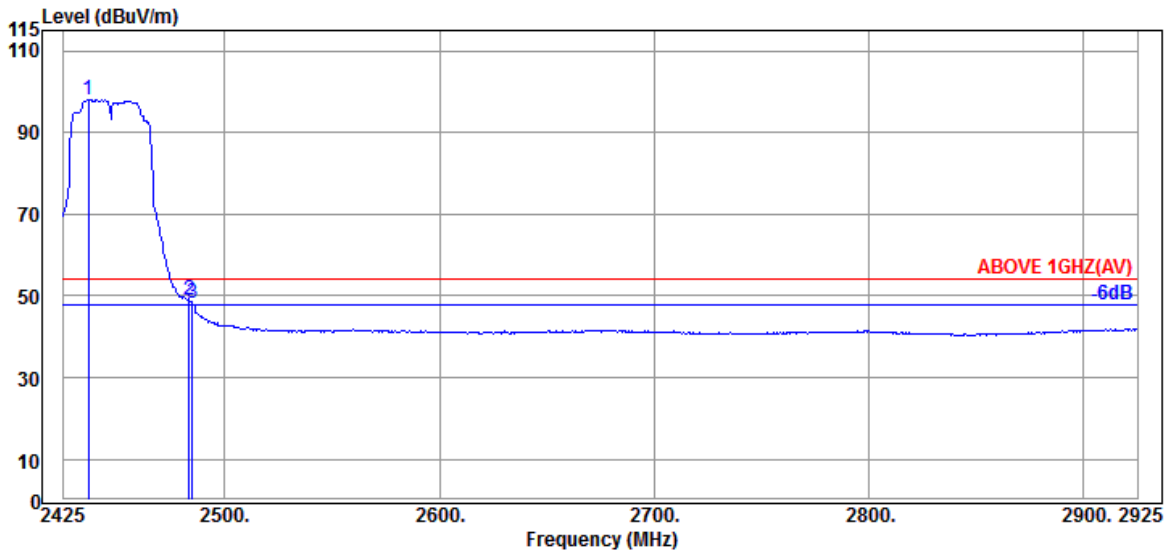


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2436.500	32.16	7.97	34.54	92.51	98.10	---	---	Average
2483.500	32.30	7.99	34.55	43.46	49.20	54.00	4.80	Average
2485.000	32.30	7.99	34.55	42.35	48.09	54.00	5.91	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

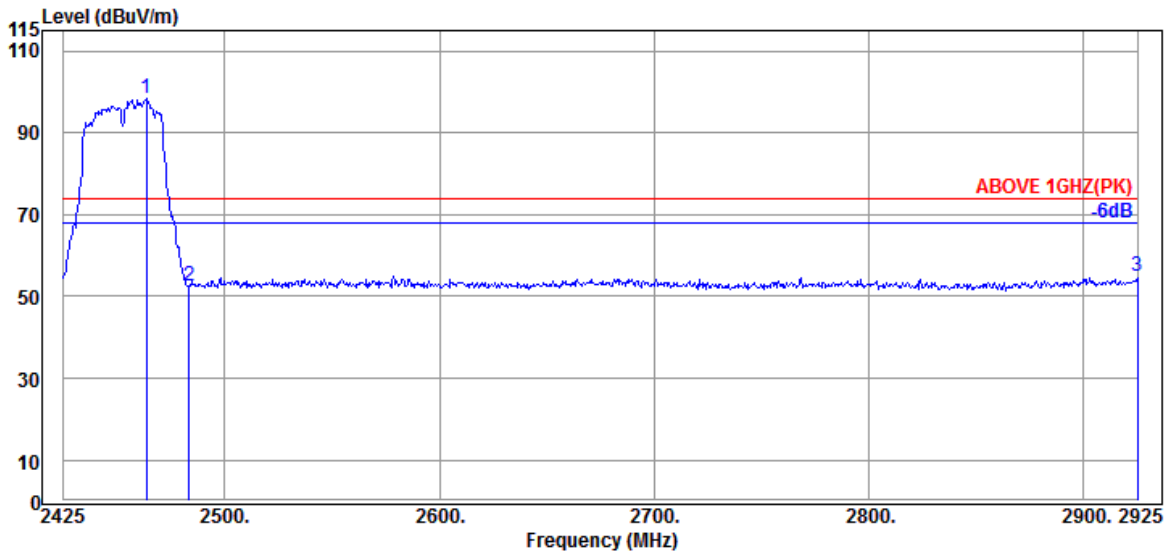

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	92.64	98.37	---	---	Peak
2483.500	32.30	7.99	34.55	46.82	52.56	74.00	21.44	Peak
2925.000	32.90	8.19	34.64	48.50	54.95	74.00	19.05	Peak

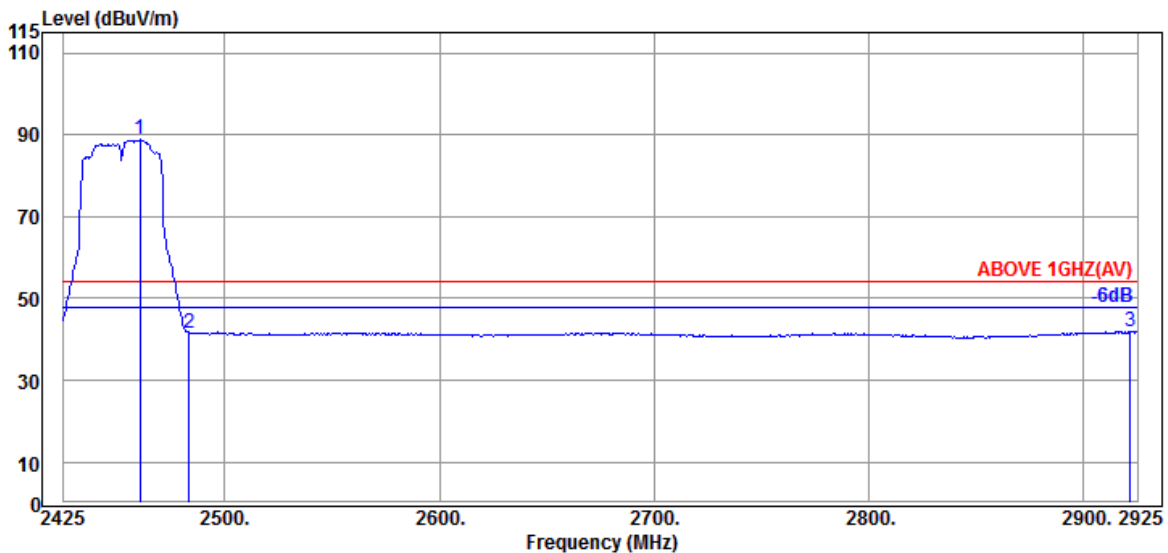


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	7.98	34.55	83.19	88.92	---	---	Average
2483.500	32.30	7.99	34.55	35.93	41.67	54.00	12.33	Average
2921.500	32.90	8.19	34.64	35.43	41.88	54.00	12.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

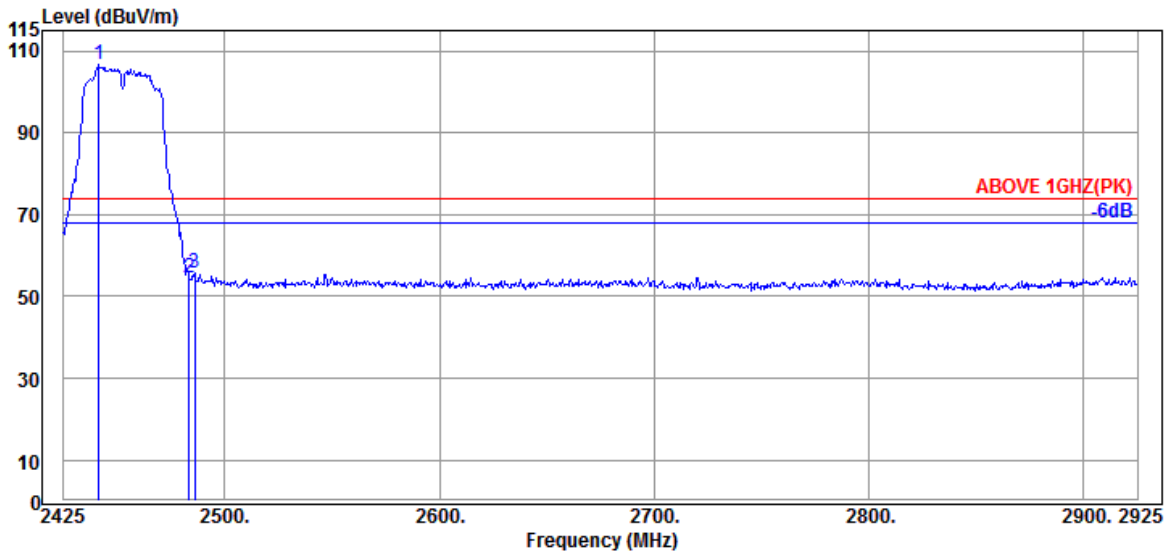

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2441.500	32.23	7.98	34.55	101.09	106.75	---	---	Peak
2483.500	32.30	7.99	34.55	48.97	54.71	74.00	19.29	Peak
2486.000	32.30	8.00	34.55	49.88	55.63	74.00	18.37	Peak

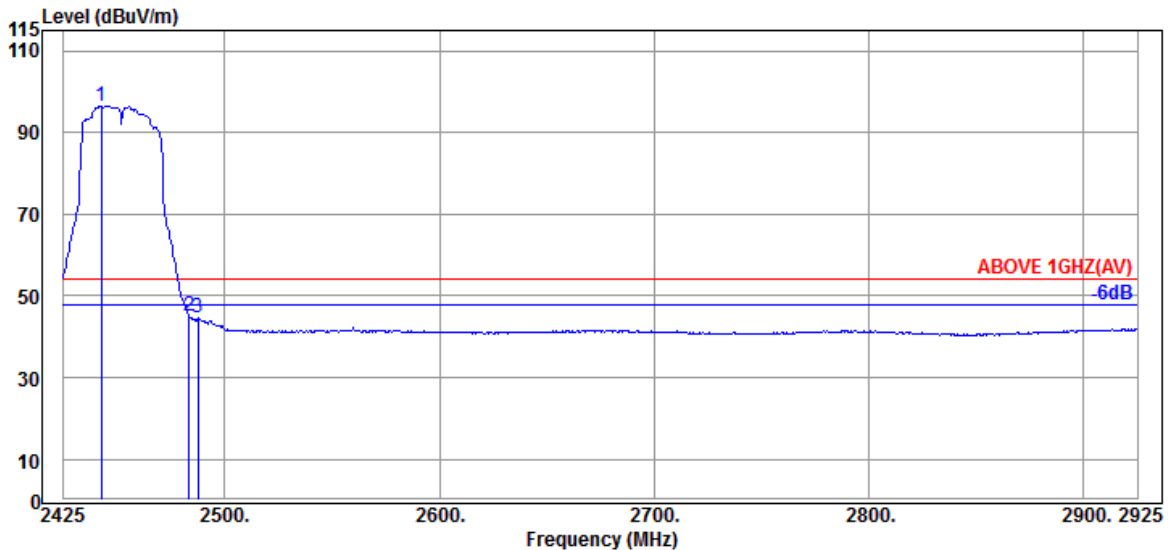


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2442.500	32.23	7.98	34.55	90.88	96.54	---	---	Average
2483.500	32.30	7.99	34.55	39.31	45.05	54.00	8.95	Average
2487.500	32.30	8.00	34.55	38.74	44.49	54.00	9.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

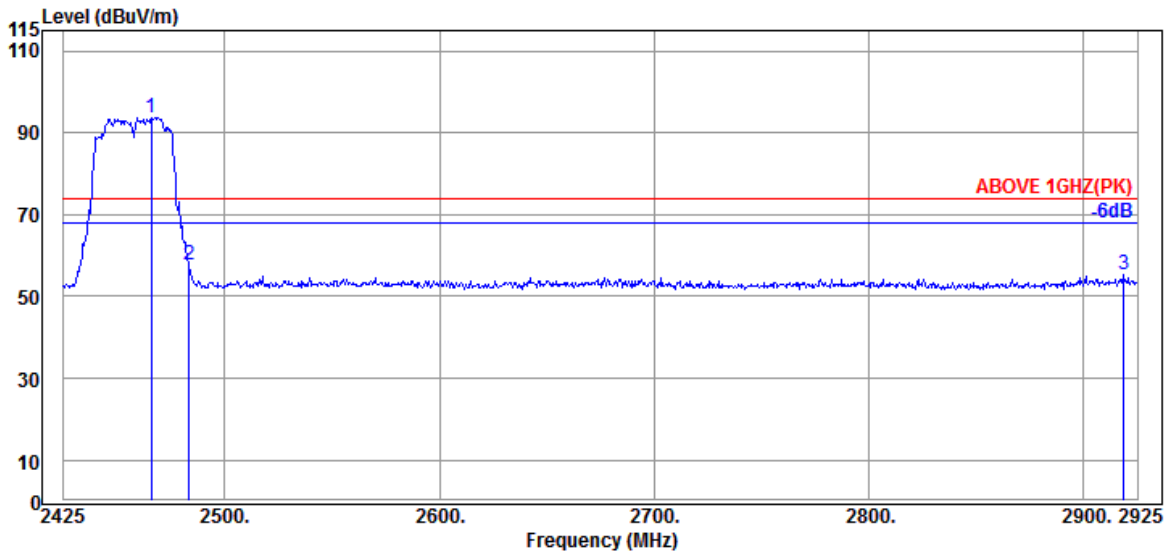

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	87.98	93.71	---	---	Peak
2483.500	32.30	7.99	34.55	51.92	57.66	74.00	16.34	Peak
2918.500	32.90	8.19	34.64	48.70	55.15	74.00	18.85	Peak

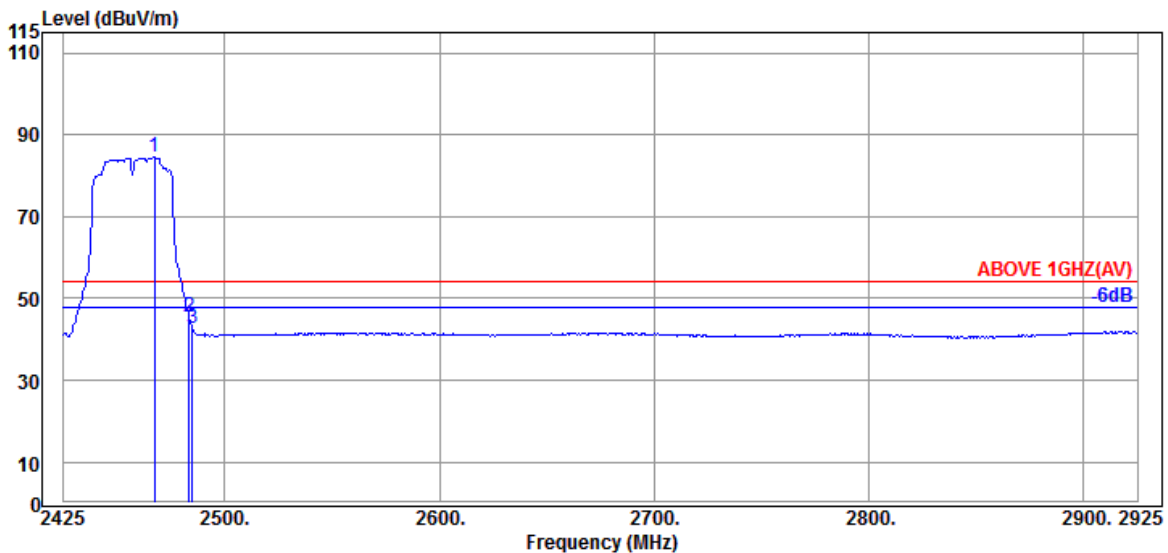


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	78.81	84.54	---	---	Average
2483.500	32.30	7.99	34.55	39.68	45.42	54.00	8.58	Average
2485.000	32.30	7.99	34.55	36.87	42.61	54.00	11.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

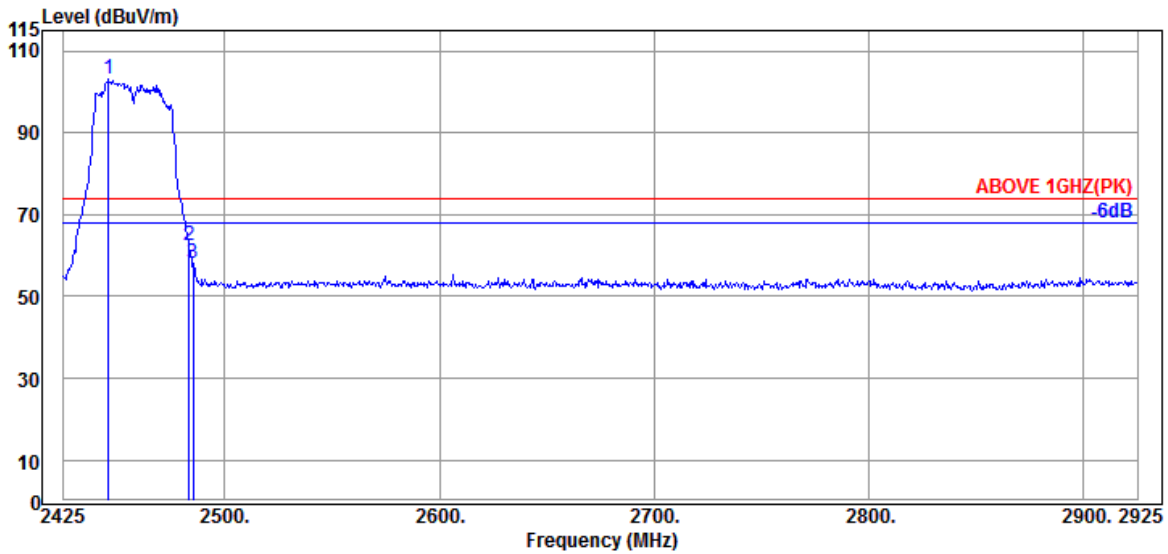

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2446.000	32.23	7.98	34.55	97.54	103.20	---	---	Peak
2483.500	32.30	7.99	34.55	56.65	62.39	74.00	11.61	Peak
2485.500	32.30	7.99	34.55	52.44	58.18	74.00	15.82	Peak

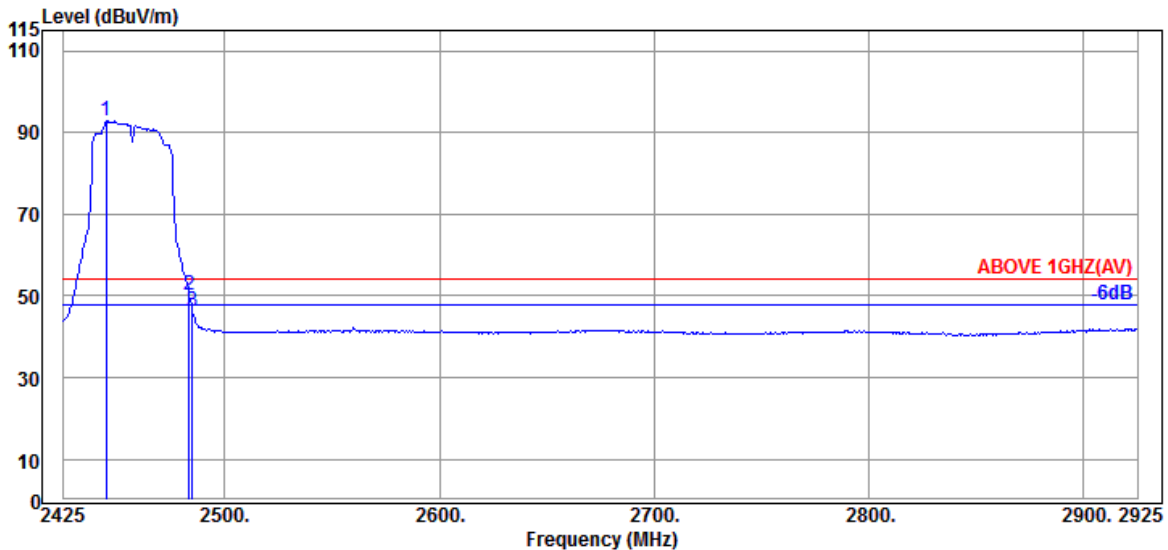


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	87.30	92.96	---	---	Average
2483.500	32.30	7.99	34.55	44.54	50.28	54.00	3.72	Average
2485.000	32.30	7.99	34.55	40.51	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

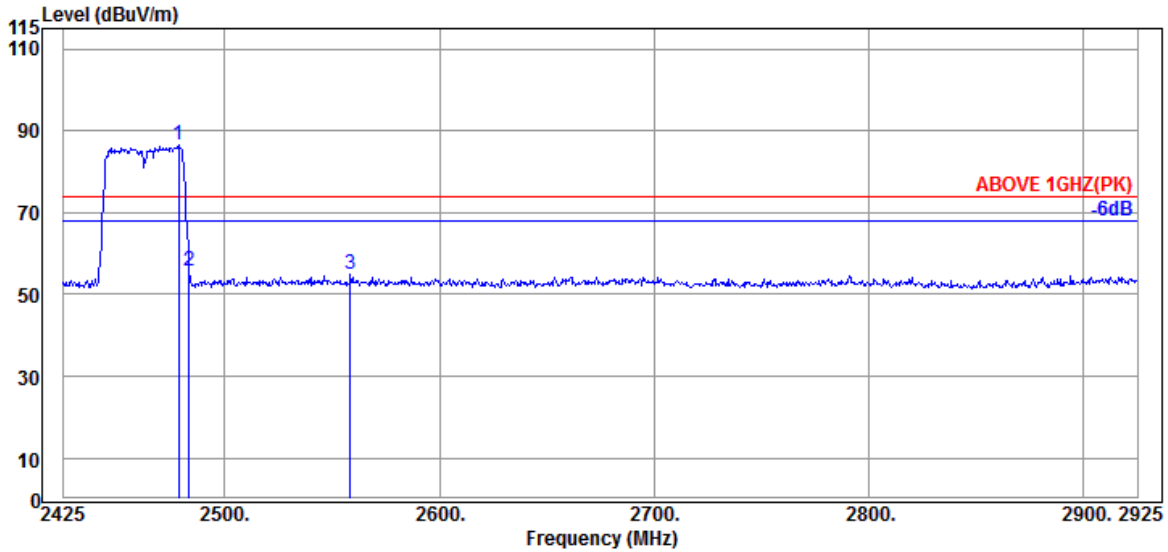

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	80.94	86.68	---	---	Peak
2483.500	32.30	7.99	34.55	50.01	55.75	74.00	18.25	Peak
2558.500	32.50	8.03	34.57	48.85	54.81	74.00	19.19	Peak

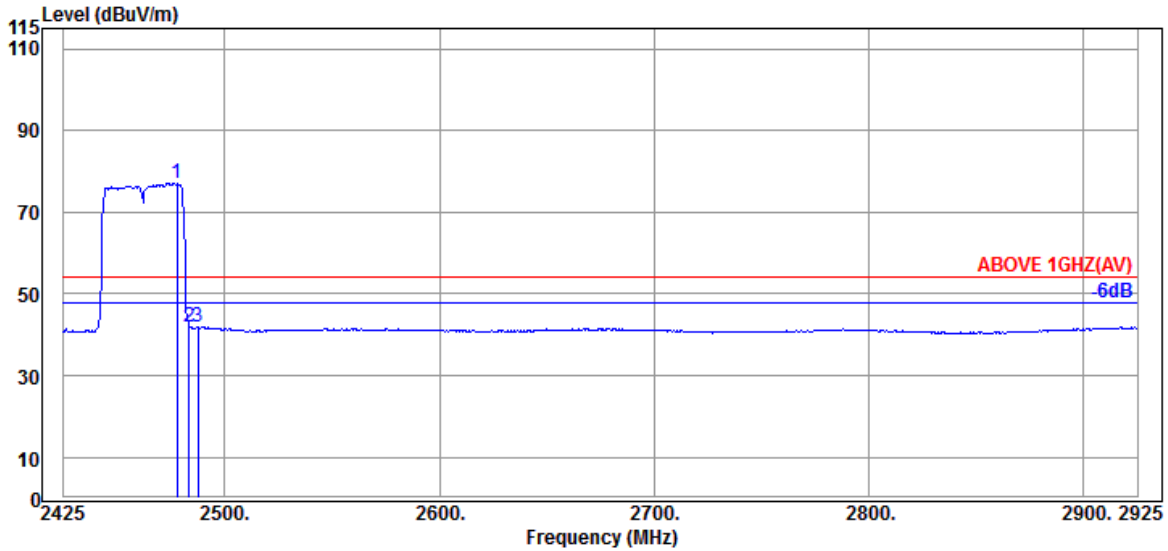


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	32.30	7.99	34.55	71.37	77.11	---	---	Average
2483.500	32.30	7.99	34.55	36.35	42.09	54.00	11.91	Average
2487.500	32.30	8.00	34.55	36.19	41.94	54.00	12.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

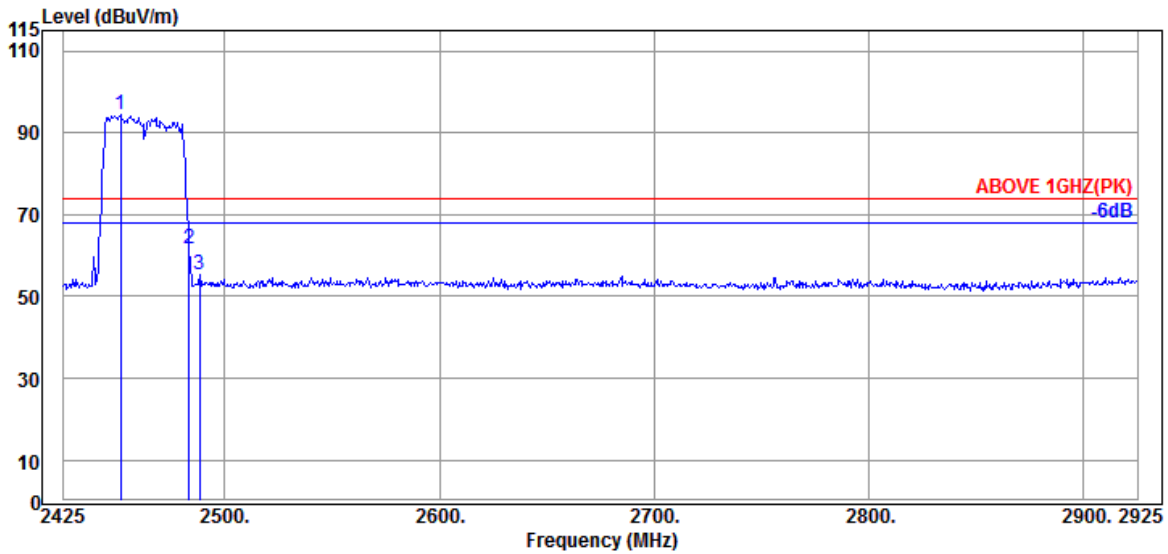

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2451.500	32.30	7.98	34.55	88.53	94.26	---	---	Peak
2483.500	32.30	7.99	34.55	55.88	61.62	74.00	12.38	Peak
2488.500	32.30	8.00	34.55	49.70	55.45	74.00	18.55	Peak

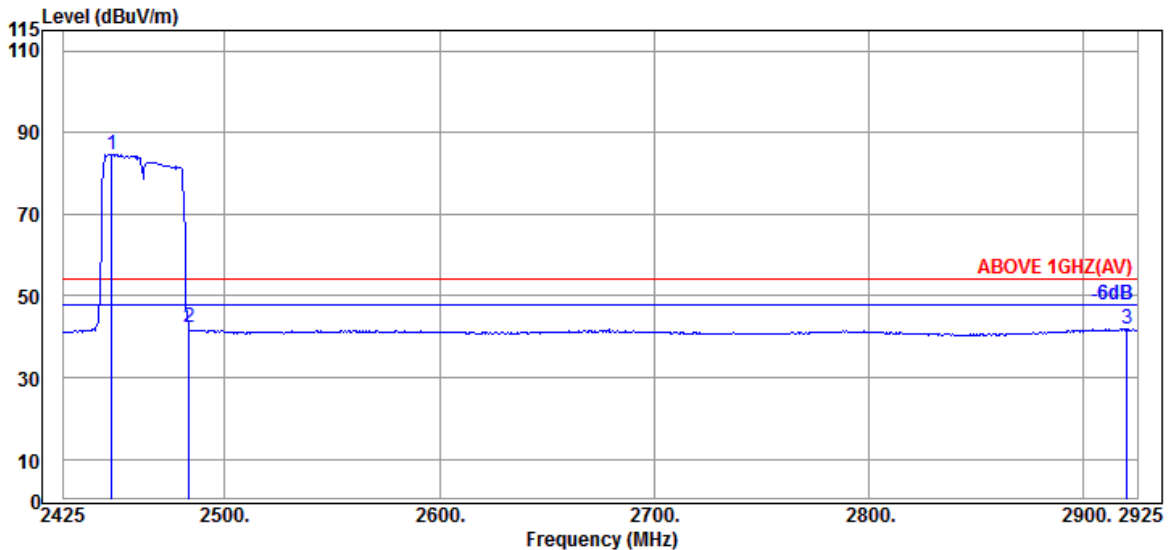


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2447.500	32.30	7.98	34.55	79.01	84.74	---	---	Average
2483.500	32.30	7.99	34.55	36.57	42.31	54.00	11.69	Average
2920.000	32.90	8.19	34.64	35.51	41.96	54.00	12.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

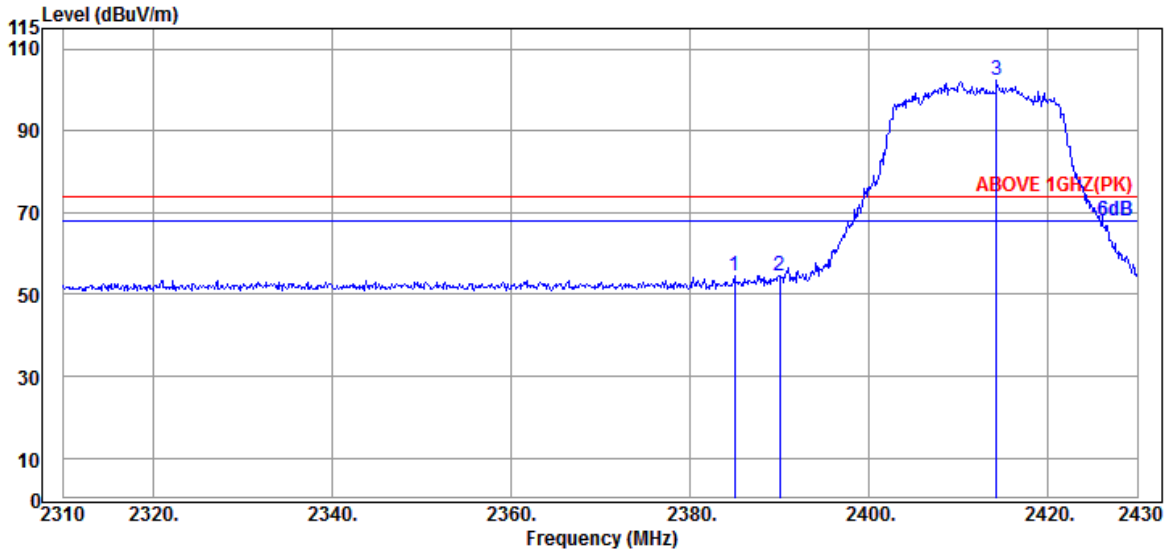

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.000	31.89	7.95	34.53	49.33	54.64	74.00	19.36	Peak
2390.040	31.89	7.95	34.54	49.23	54.53	74.00	19.47	Peak
@ 2414.280	31.94	7.96	34.54	97.03	102.39	---	---	Peak

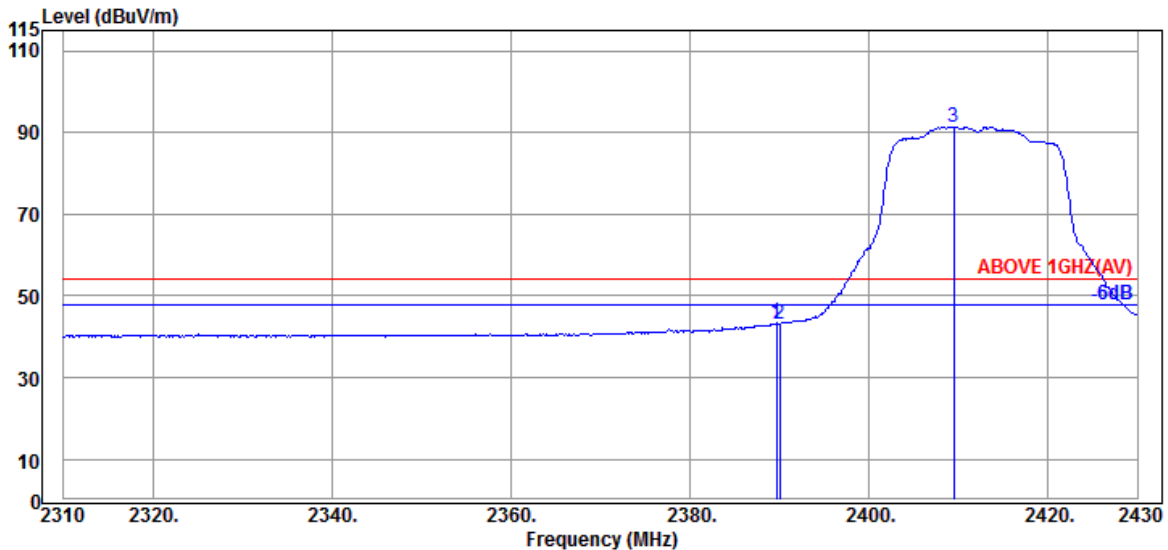


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.98	43.29	54.00	10.71	Average
2390.040	31.89	7.95	34.54	37.90	43.20	54.00	10.80	Average
@ 2409.480	31.87	7.96	34.54	86.08	91.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

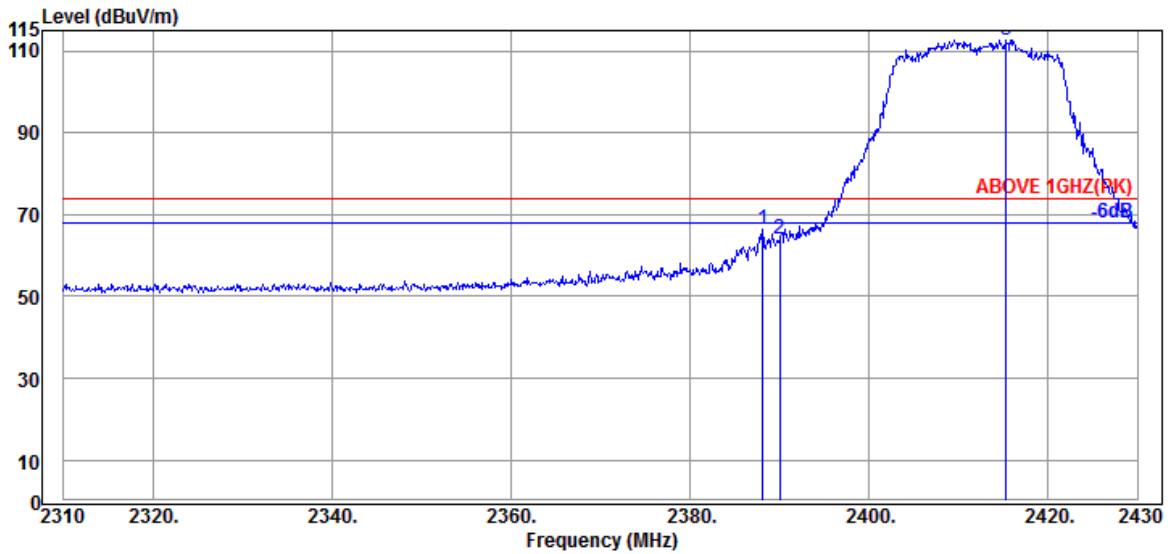

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	31.89	7.95	34.53	60.89	66.20	74.00	7.80	Peak
2390.040	31.89	7.95	34.54	58.74	64.04	74.00	9.96	Peak
@ 2415.360	31.94	7.96	34.54	107.39	112.75	---	---	Peak

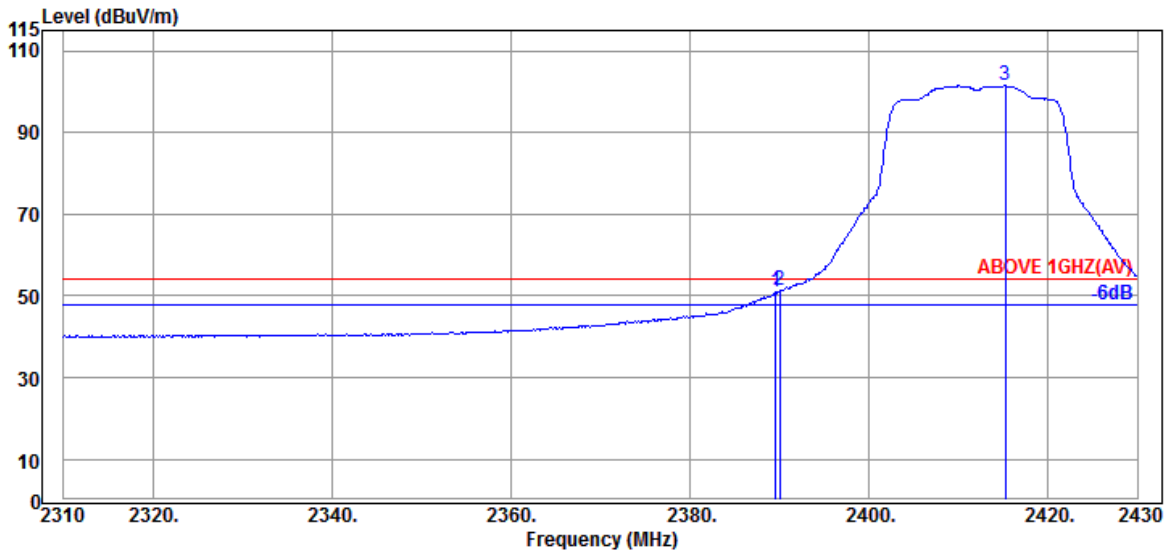


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	45.49	50.80	54.00	3.20	Average
2390.040	31.89	7.95	34.54	45.93	51.23	54.00	2.77	Average
@ 2415.240	31.94	7.96	34.54	96.08	101.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

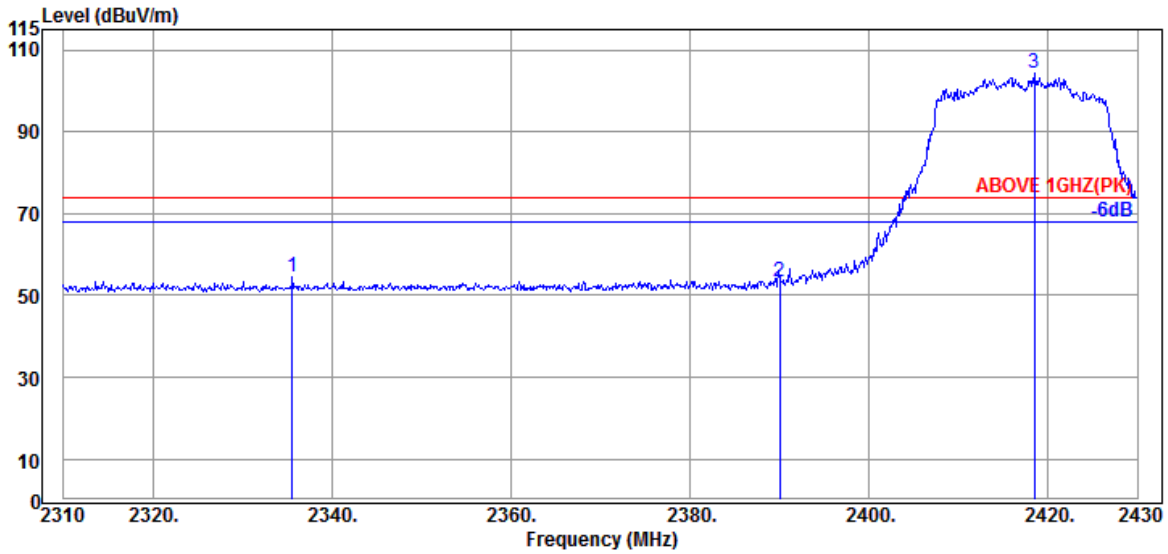

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.560	32.02	7.92	34.52	49.22	54.64	74.00	19.36	Peak
2390.040	31.89	7.95	34.54	48.11	53.41	74.00	20.59	Peak
@ 2418.480	32.01	7.96	34.54	98.92	104.35	---	---	Peak

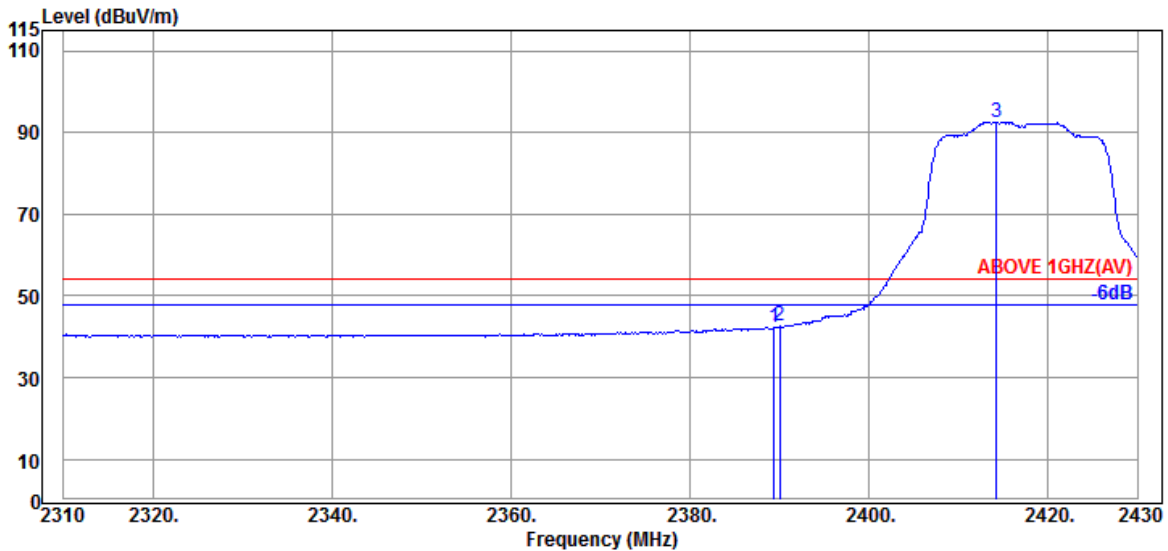


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	37.11	42.42	54.00	11.58	Average
2390.040	31.89	7.95	34.54	37.24	42.54	54.00	11.46	Average
@ 2414.280	31.94	7.96	34.54	87.18	92.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

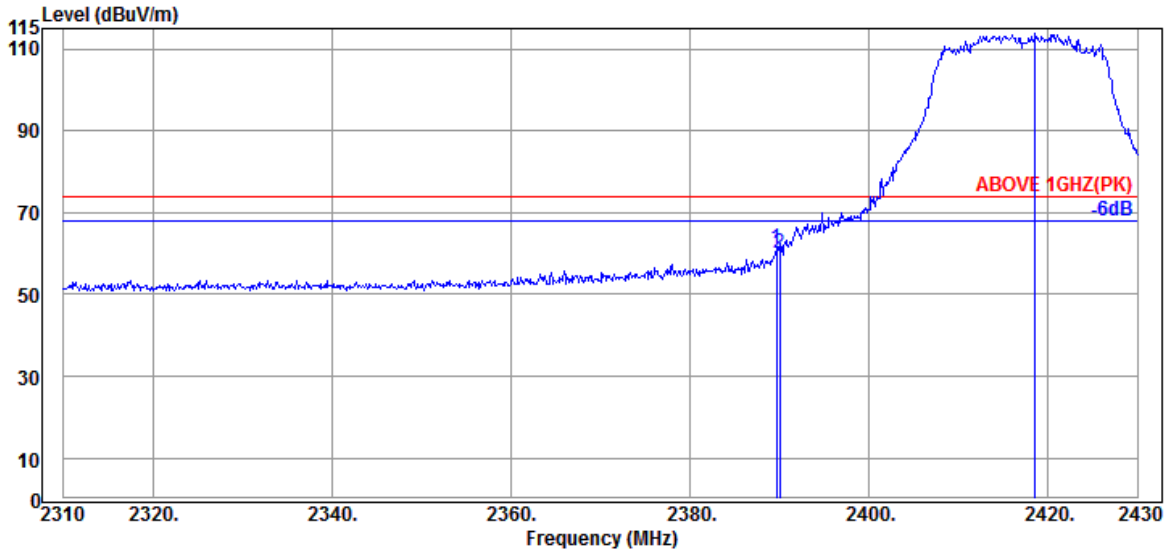

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	55.77	61.08	74.00	12.92	Peak
2390.040	31.89	7.95	34.54	54.62	59.92	74.00	14.08	Peak
@ 2418.600	32.01	7.96	34.54	108.28	113.71	---	---	Peak

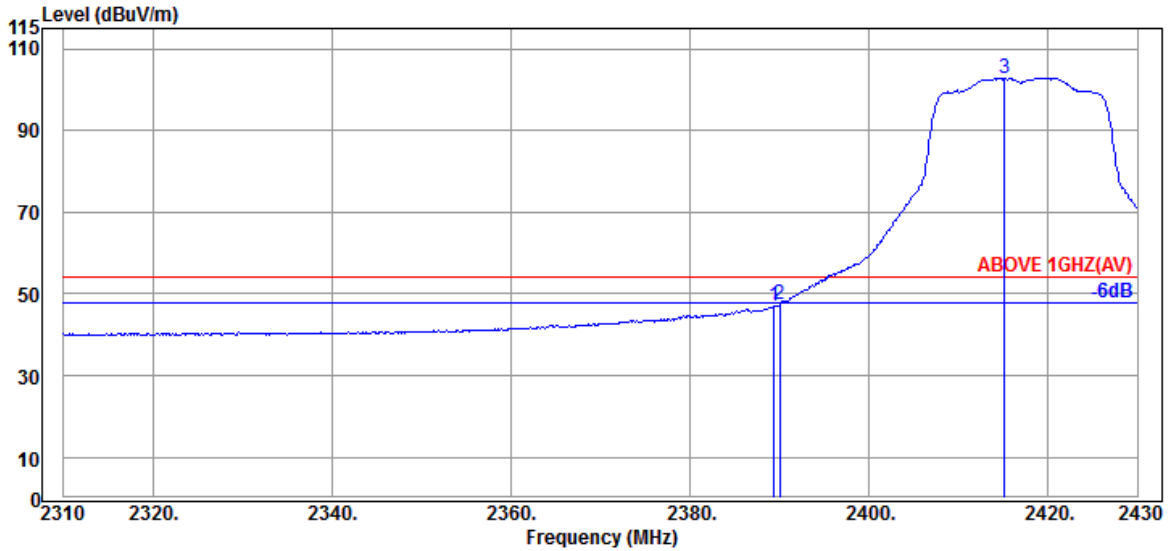


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	41.74	47.05	54.00	6.95	Average
2390.040	31.89	7.95	34.54	42.12	47.42	54.00	6.58	Average
@ 2415.120	31.94	7.96	34.54	97.38	102.74	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

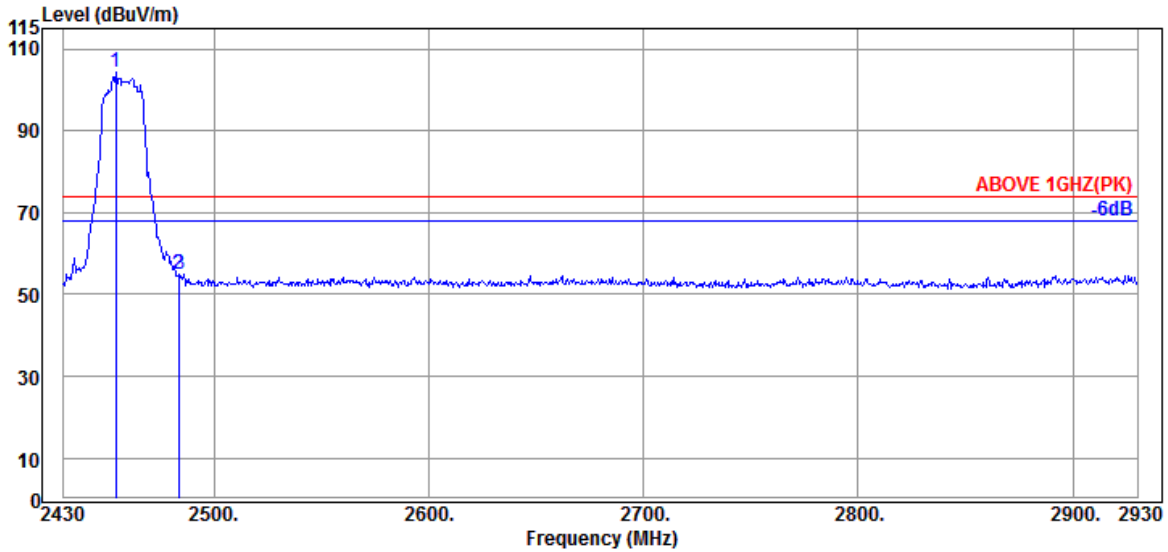

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	98.79	104.52	---	---	Peak
2483.500	32.30	7.99	34.55	49.22	54.96	74.00	19.04	Peak
2484.000	32.30	7.99	34.55	49.08	54.82	74.00	19.18	Peak

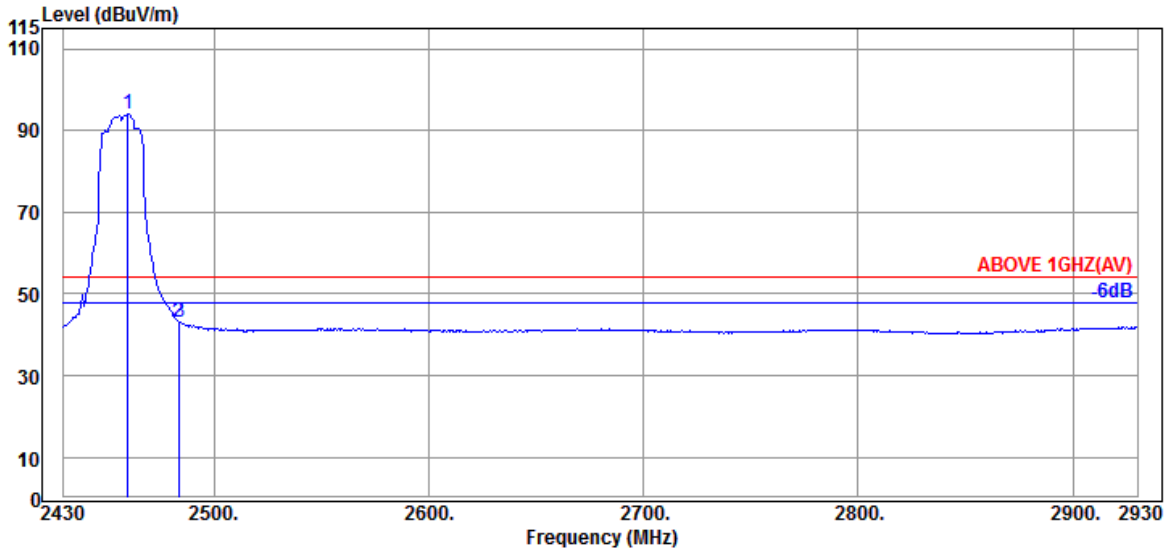


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	32.30	7.98	34.55	88.16	93.89	---	---	Average
2483.500	32.30	7.99	34.55	37.37	43.11	54.00	10.89	Average
2484.000	32.30	7.99	34.55	37.38	43.12	54.00	10.88	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

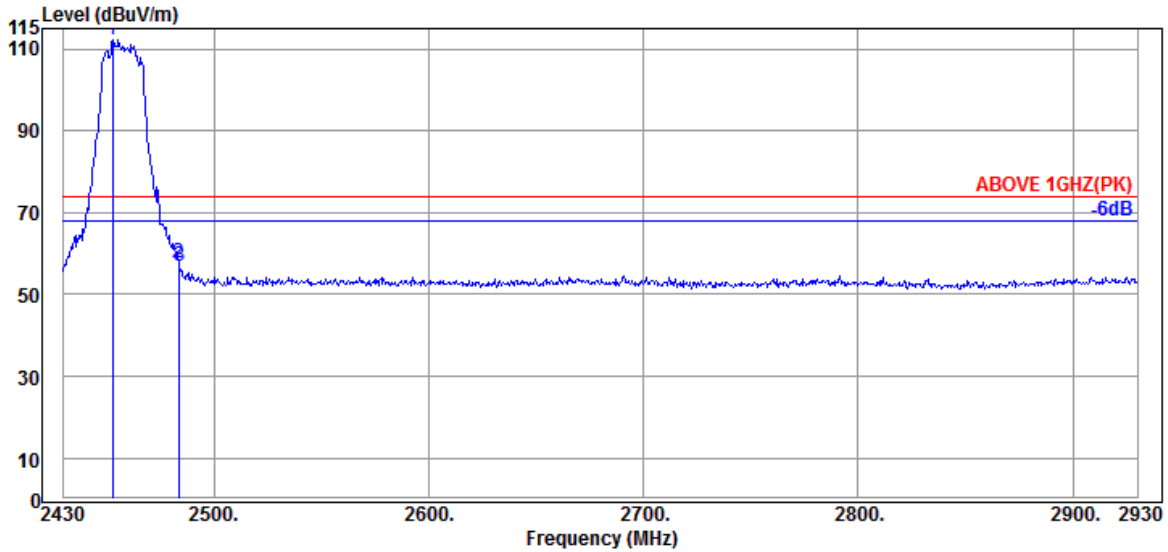

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	106.52	112.25	---	---	Peak
2483.500	32.30	7.99	34.55	51.92	57.66	74.00	16.34	Peak
2484.000	32.30	7.99	34.55	51.17	56.91	74.00	17.09	Peak

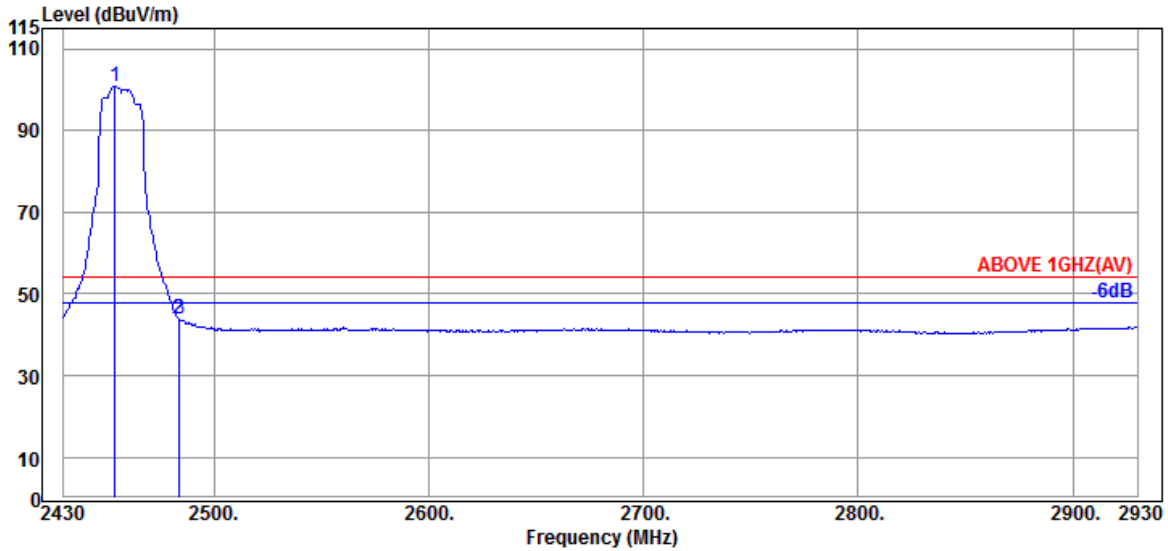


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.000	32.30	7.98	34.55	95.01	100.74	---	---	Average
2483.500	32.30	7.99	34.55	38.30	44.04	54.00	9.96	Average
2484.000	32.30	7.99	34.55	38.11	43.85	54.00	10.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

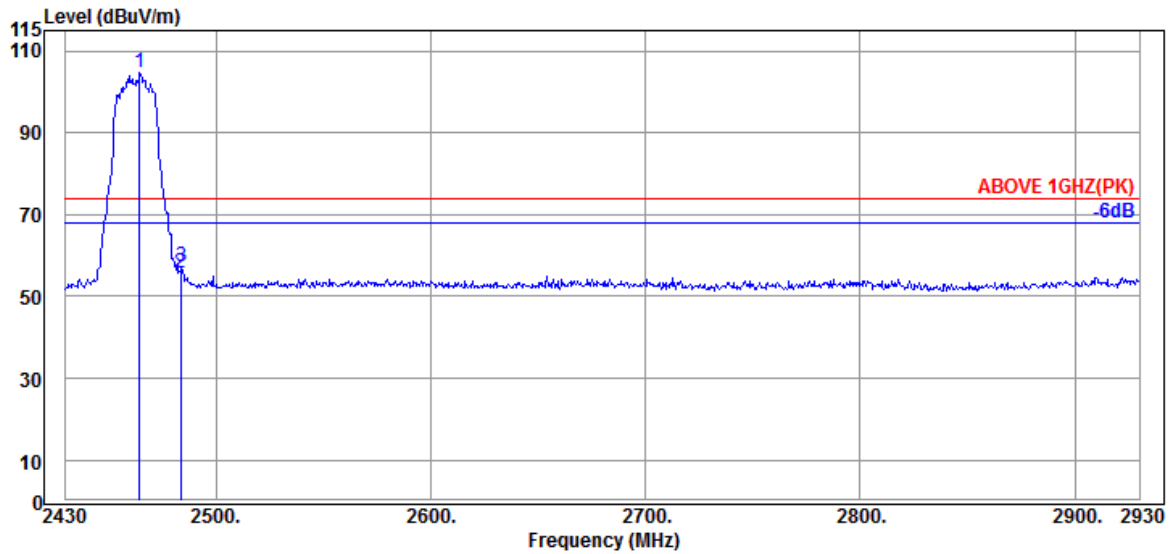

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	98.96	104.69	---	---	Peak
2483.500	32.30	7.99	34.55	49.91	55.65	74.00	18.35	Peak
2484.000	32.30	7.99	34.55	51.55	57.29	74.00	16.71	Peak

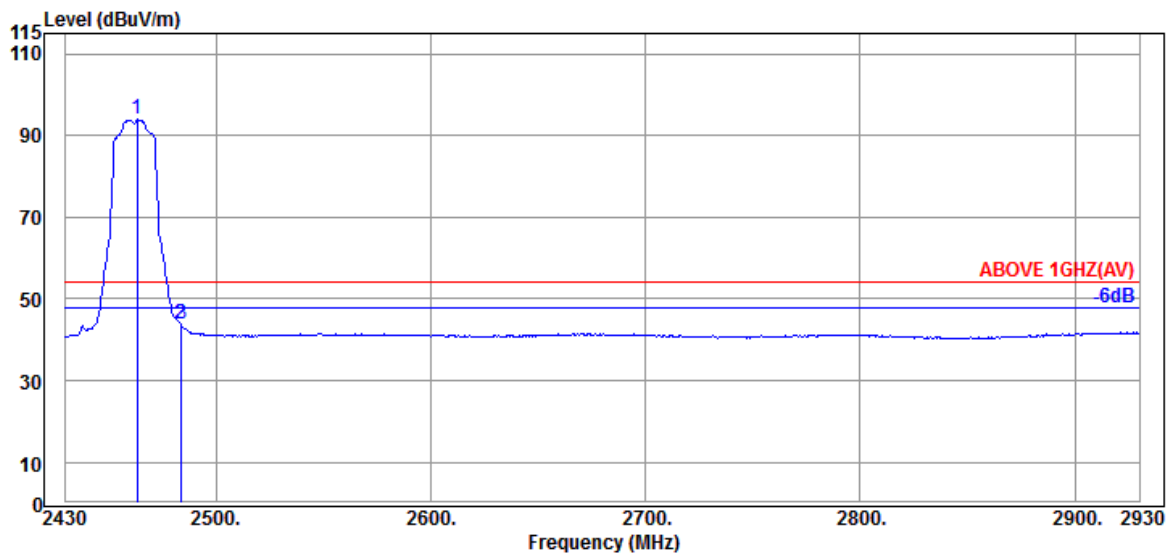


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	88.16	93.89	---	---	Average
2483.500	32.30	7.99	34.55	38.26	44.00	54.00	10.00	Average
2484.000	32.30	7.99	34.55	38.07	43.81	54.00	10.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

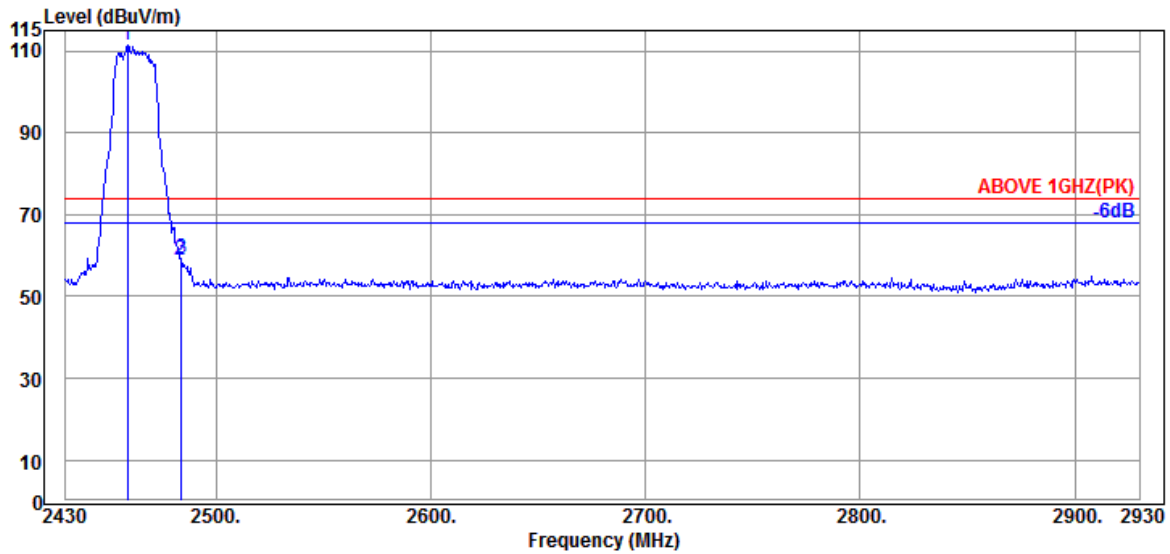

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	105.52	111.25	---	---	Peak
2483.500	32.30	7.99	34.55	53.25	58.99	74.00	15.01	Peak
2484.000	32.30	7.99	34.55	53.58	59.32	74.00	14.68	Peak

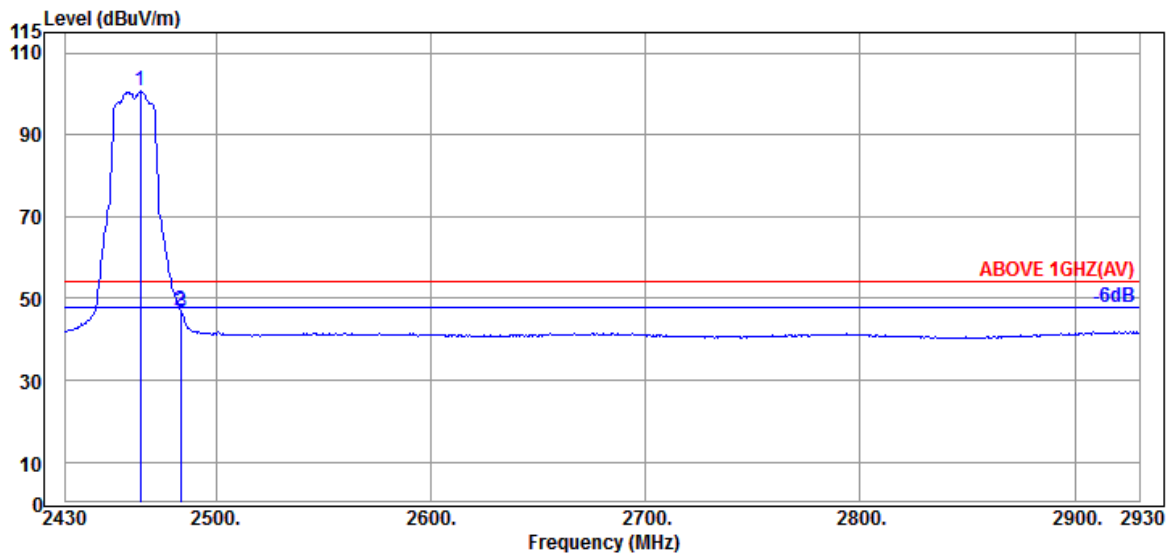


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	94.89	100.62	---	---	Average
2483.500	32.30	7.99	34.55	41.30	47.04	54.00	6.96	Average
2484.000	32.30	7.99	34.55	40.93	46.67	54.00	7.33	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

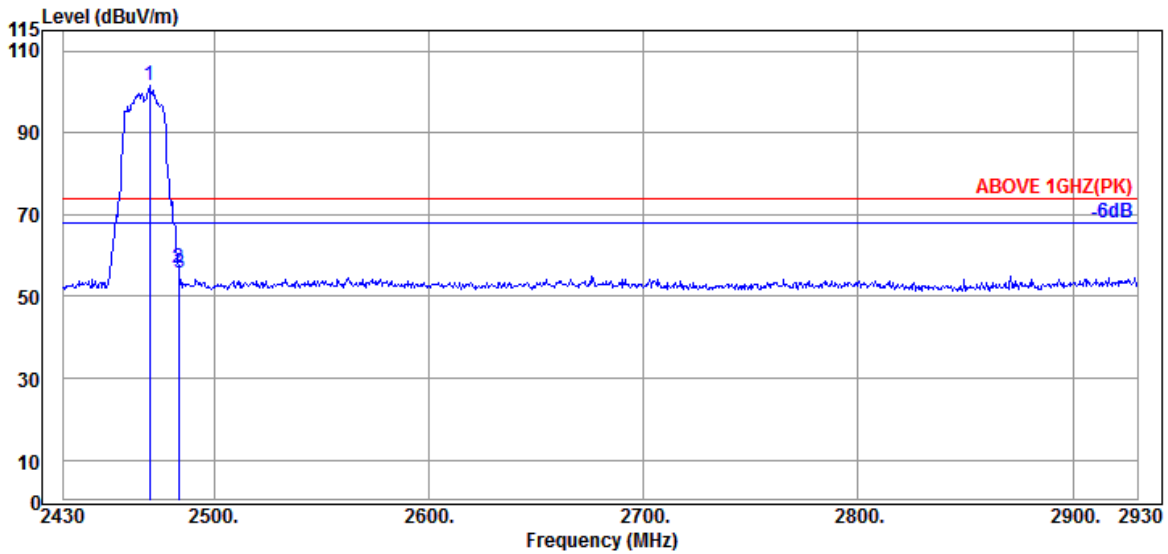

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	32.30	7.99	34.55	95.67	101.41	---	---	Peak
2483.500	32.30	7.99	34.55	51.35	57.09	74.00	16.91	Peak
2484.000	32.30	7.99	34.55	49.79	55.53	74.00	18.47	Peak

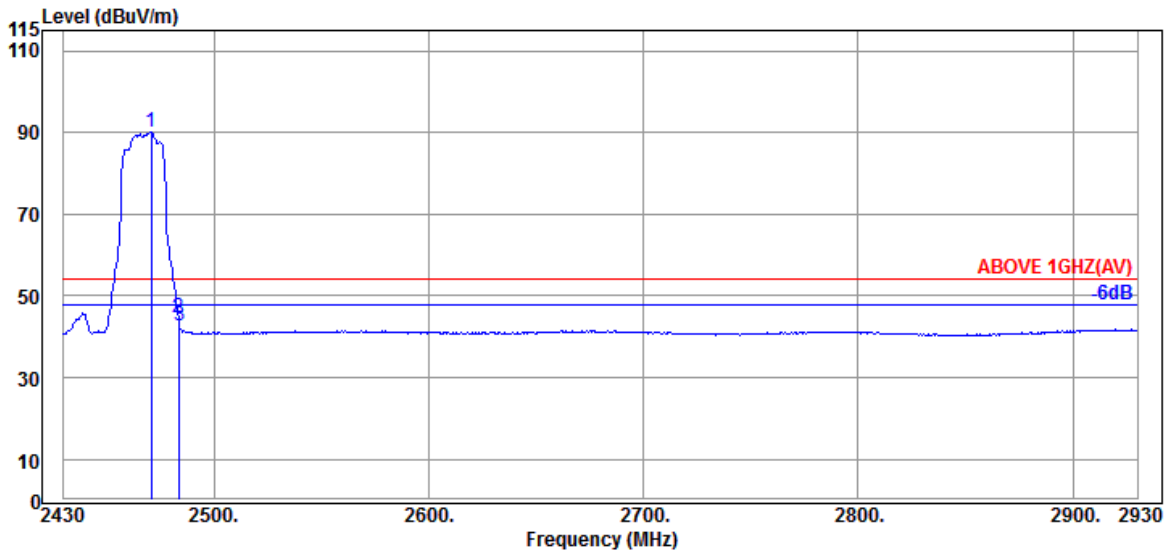


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	84.28	90.02	---	---	Average
2483.500	32.30	7.99	34.55	38.84	44.58	54.00	9.42	Average
2484.000	32.30	7.99	34.55	37.01	42.75	54.00	11.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

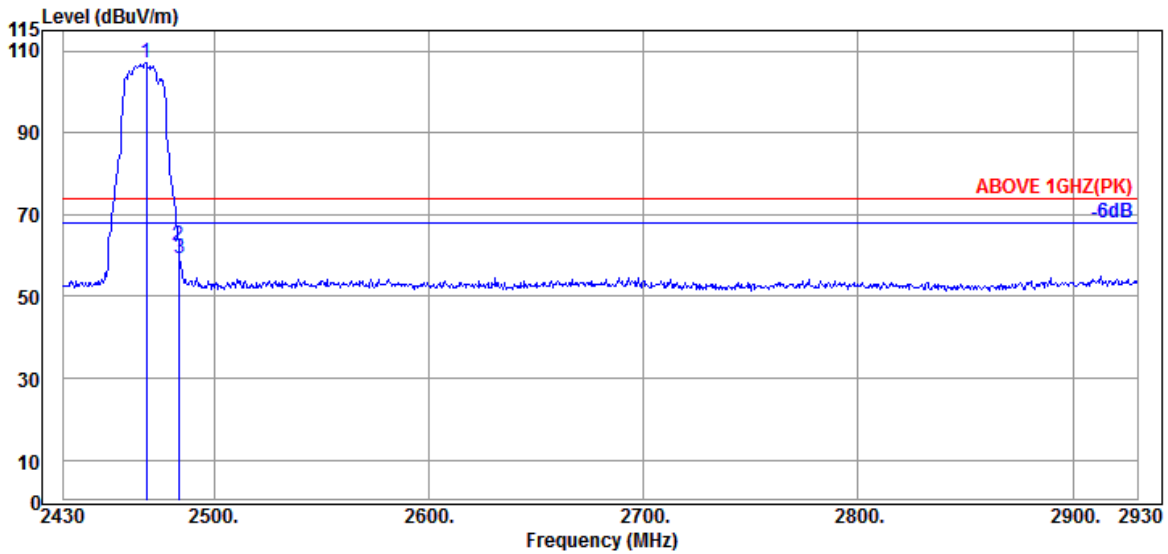

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	101.27	107.00	---	---	Peak
2483.500	32.30	7.99	34.55	56.75	62.49	74.00	11.51	Peak
2484.000	32.30	7.99	34.55	53.73	59.47	74.00	14.53	Peak

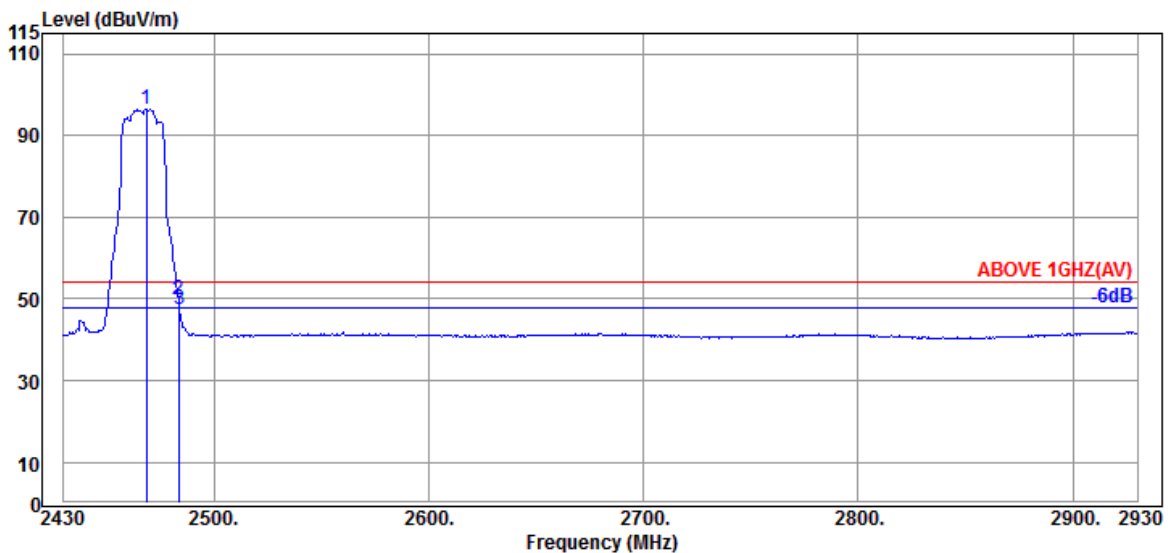


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	90.83	96.56	---	---	Average
2483.500	32.30	7.99	34.55	44.02	49.76	54.00	4.24	Average
2484.000	32.30	7.99	34.55	41.55	47.29	54.00	6.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

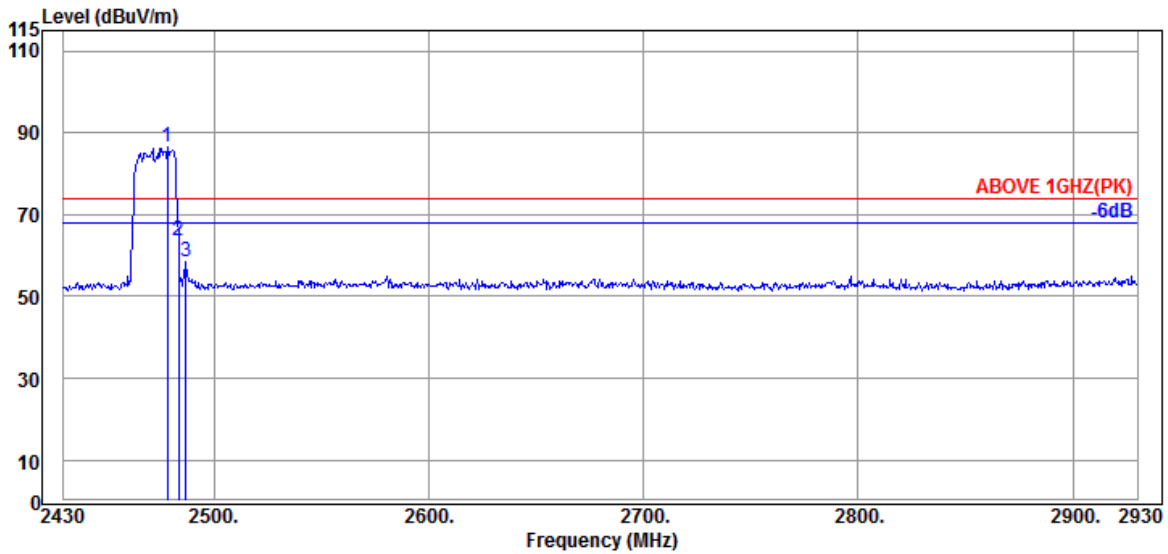

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	80.80	86.54	---	---	Peak
2483.500	32.30	7.99	34.55	57.74	63.48	74.00	10.52	Peak
2487.000	32.30	8.00	34.55	52.73	58.48	74.00	15.52	Peak

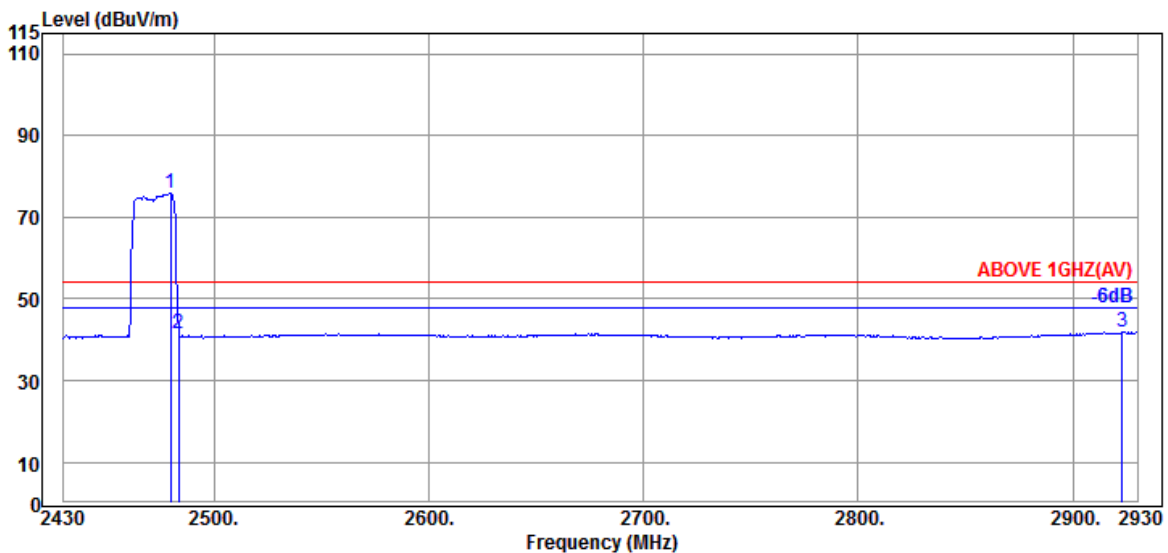


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	70.16	75.90	---	---	Average
2483.500	32.30	7.99	34.55	35.66	41.40	54.00	12.60	Average
2923.000	32.90	8.19	34.64	35.40	41.85	54.00	12.15	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

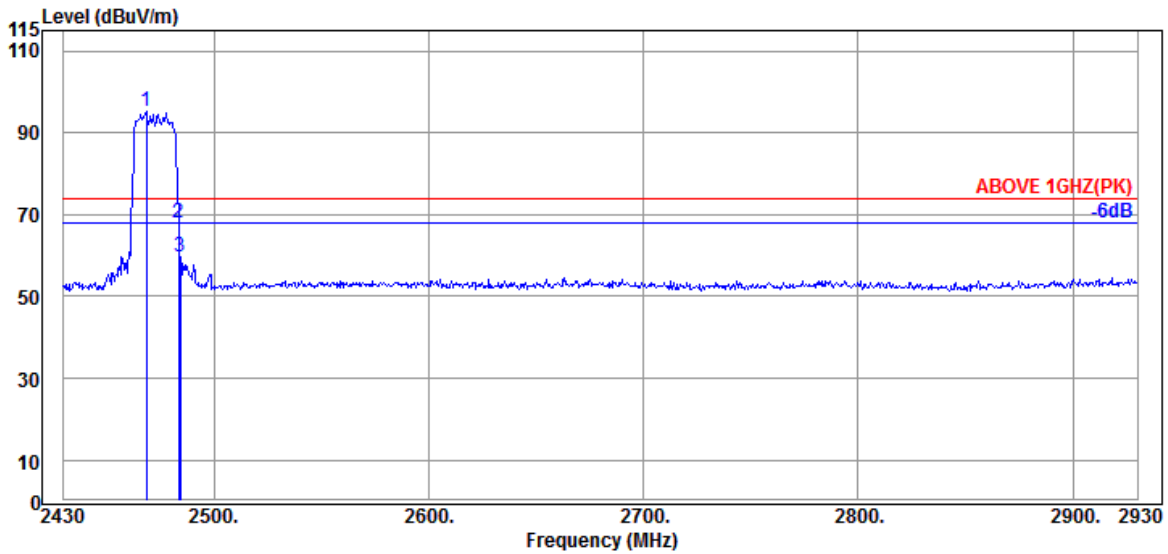

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	89.64	95.37	---	---	Peak
2483.500	32.30	7.99	34.55	62.09	67.83	74.00	6.17	Peak
2484.500	32.30	7.99	34.55	53.75	59.49	74.00	14.51	Peak

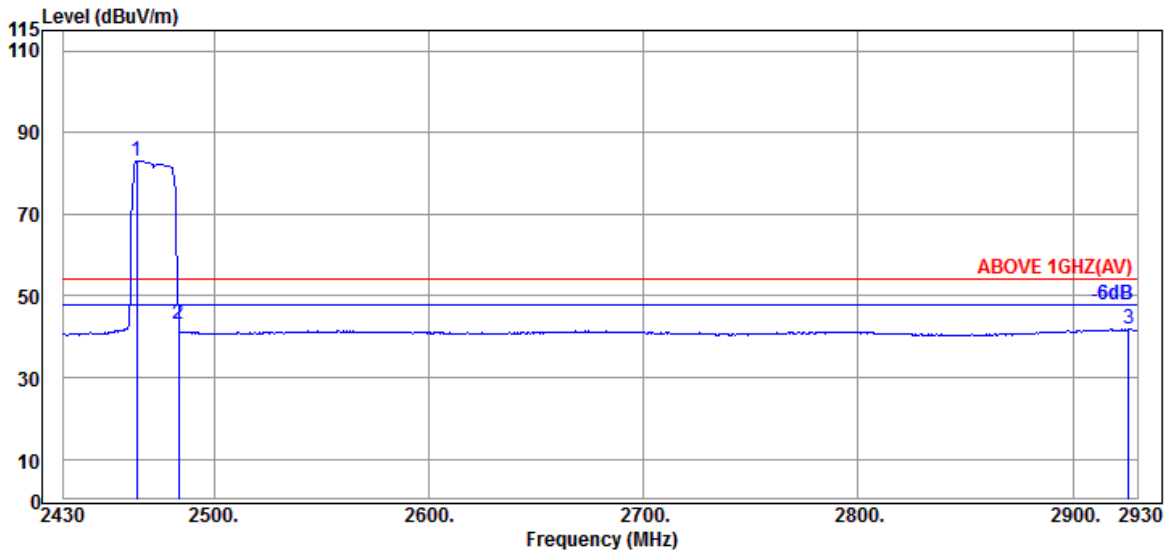


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	77.39	83.12	---	---	Average
2483.500	32.30	7.99	34.55	37.28	43.02	54.00	10.98	Average
2926.000	32.90	8.19	34.65	35.43	41.87	54.00	12.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

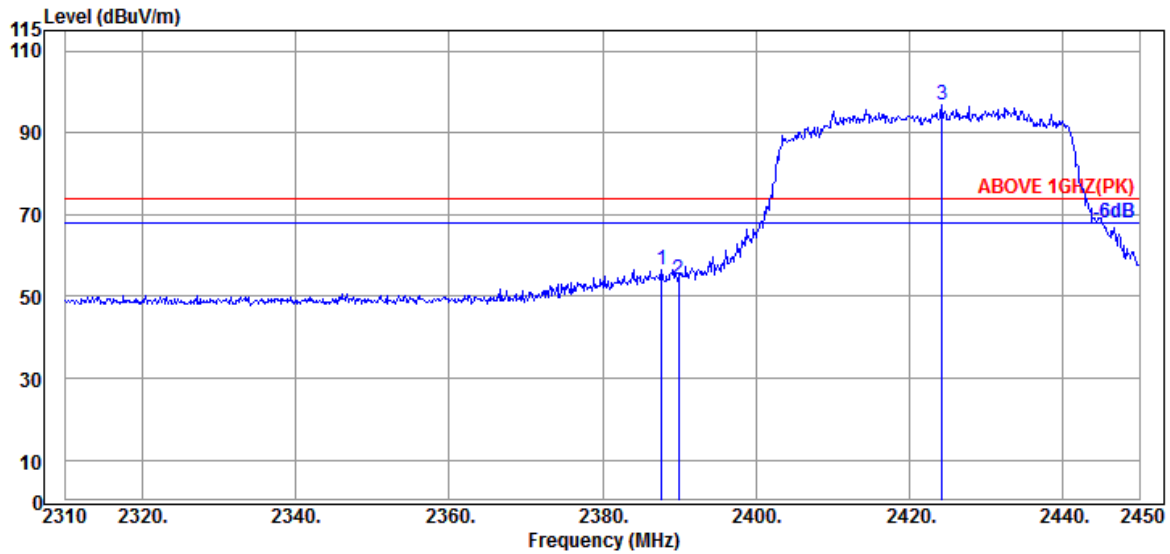

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	31.89	7.95	34.53	51.27	56.58	74.00	17.42	Peak
2389.940	31.89	7.95	34.54	48.85	54.15	74.00	19.85	Peak
@ 2424.240	32.01	7.97	34.54	91.38	96.82	---	---	Peak

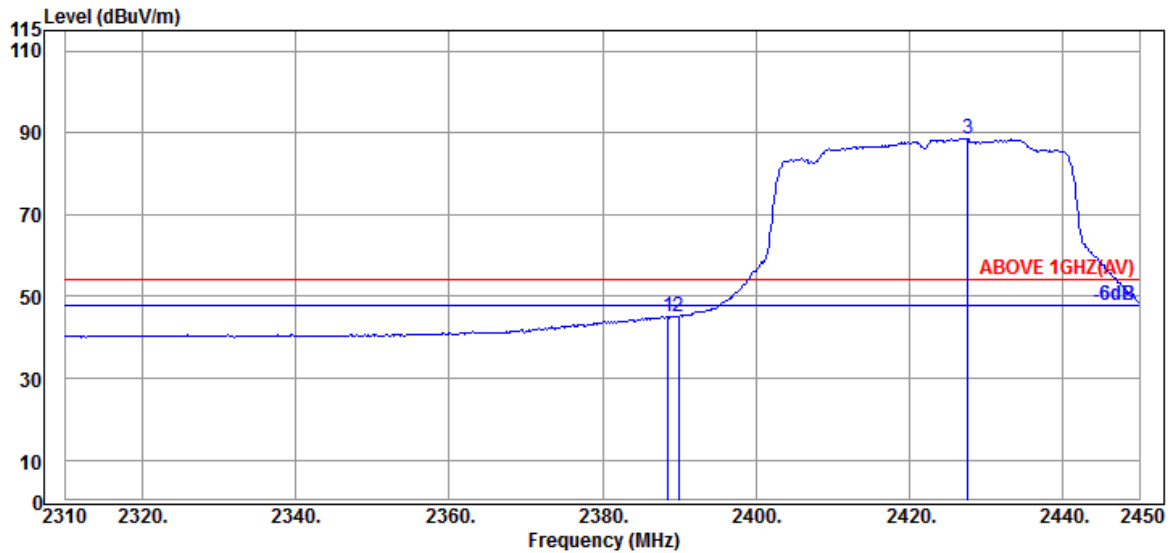


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.540	31.89	7.95	34.53	39.83	45.14	54.00	8.86	Average
2389.940	31.89	7.95	34.54	39.87	45.17	54.00	8.83	Average
@ 2427.600	32.09	7.97	34.54	83.06	88.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

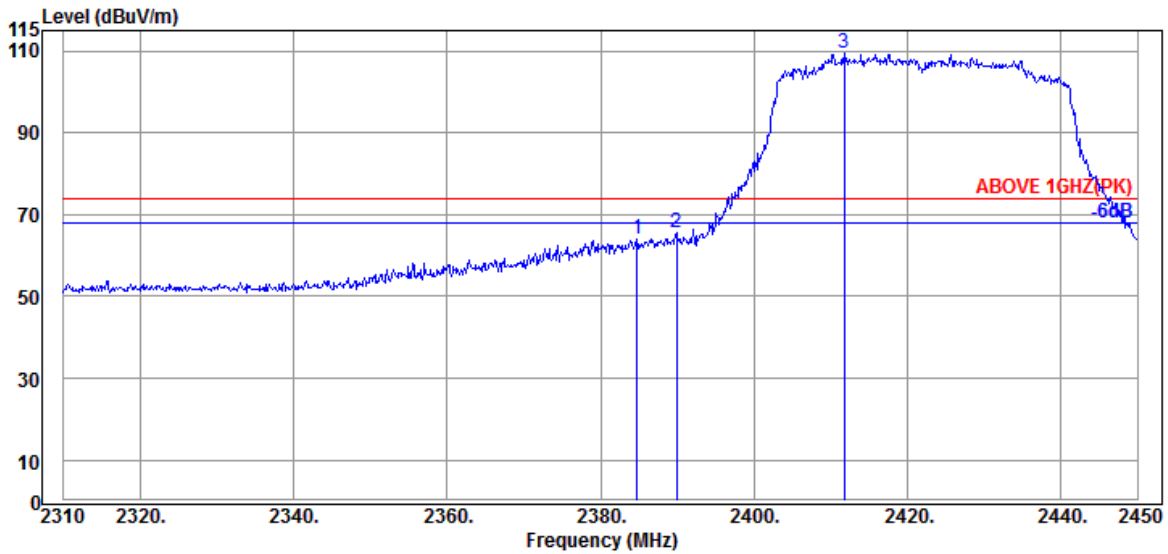

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.760	31.89	7.95	34.53	58.91	64.22	74.00	9.78	Peak
2389.940	31.89	7.95	34.54	60.32	65.62	74.00	8.38	Peak
@ 2411.780	31.94	7.96	34.54	103.99	109.35	---	---	Peak

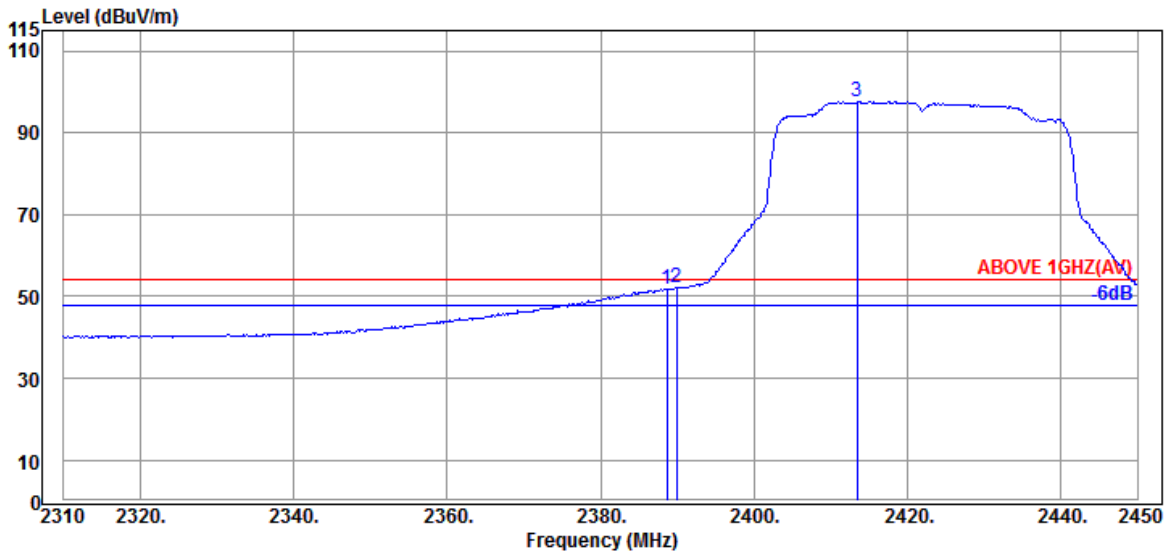


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.680	31.89	7.95	34.53	46.65	51.96	54.00	2.04	Average
2389.940	31.89	7.95	34.54	46.78	52.08	54.00	1.92	Average
@ 2413.460	31.94	7.96	34.54	92.20	97.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

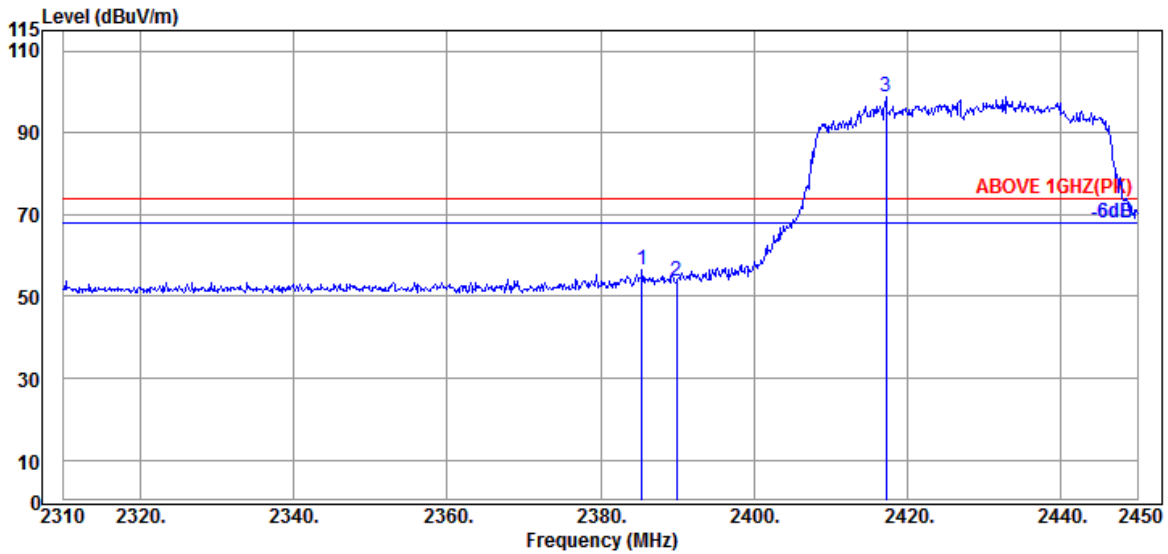

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.460	31.89	7.95	34.53	51.17	56.48	74.00	17.52	Peak
2389.940	31.89	7.95	34.54	48.44	53.74	74.00	20.26	Peak
@ 2417.240	31.94	7.96	34.54	93.41	98.77	---	---	Peak

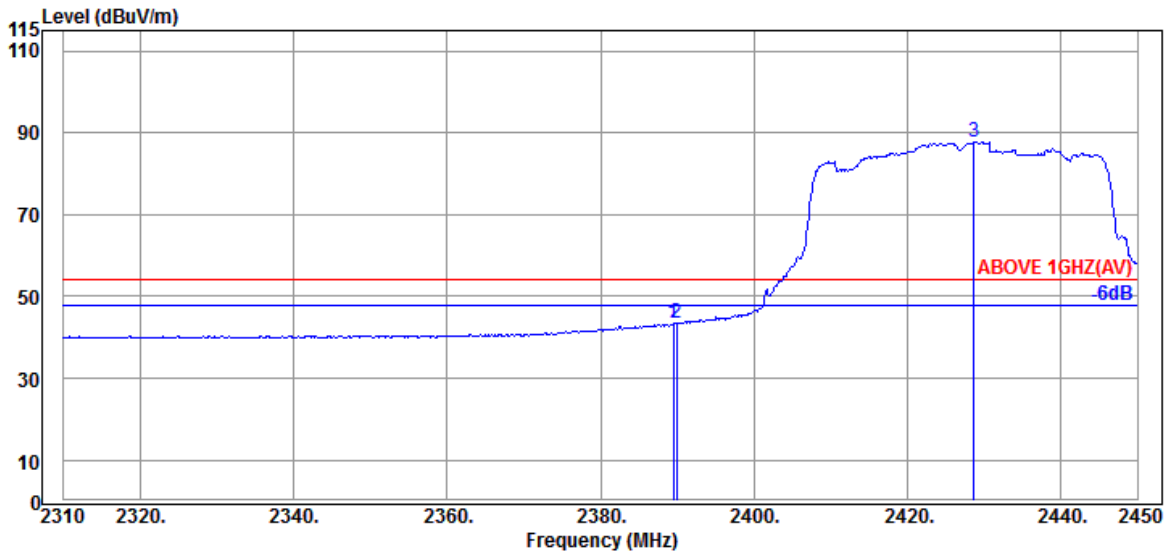


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	31.89	7.95	34.53	38.04	43.35	54.00	10.65	Average
2389.940	31.89	7.95	34.54	38.07	43.37	54.00	10.63	Average
@ 2428.720	32.09	7.97	34.54	82.21	87.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

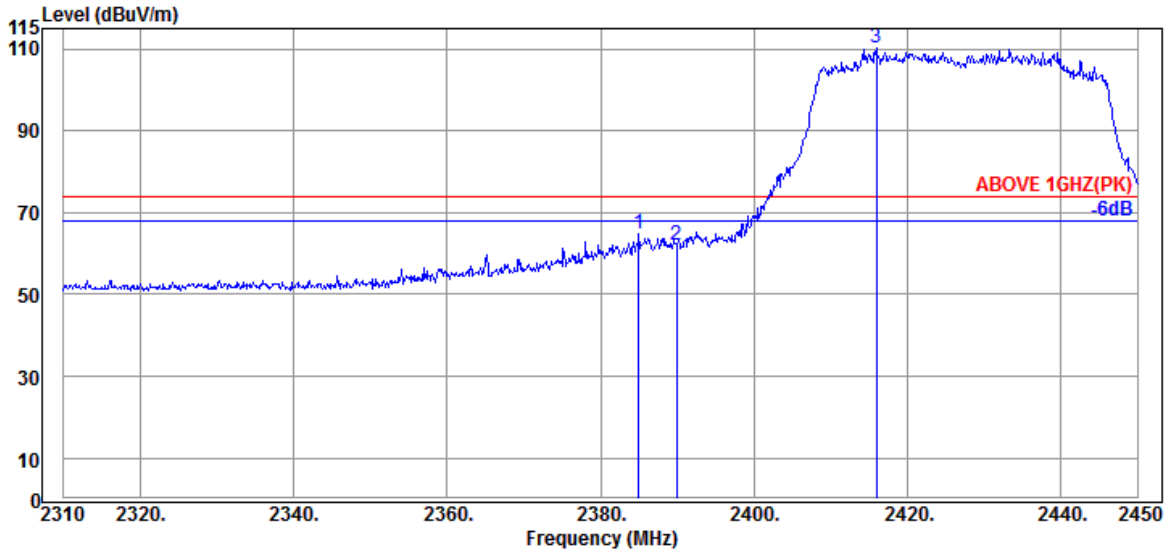

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.040	31.89	7.95	34.53	59.35	64.66	74.00	9.34	Peak
2389.940	31.89	7.95	34.54	56.83	62.13	74.00	11.87	Peak
@ 2415.980	31.94	7.96	34.54	104.70	110.06	---	---	Peak

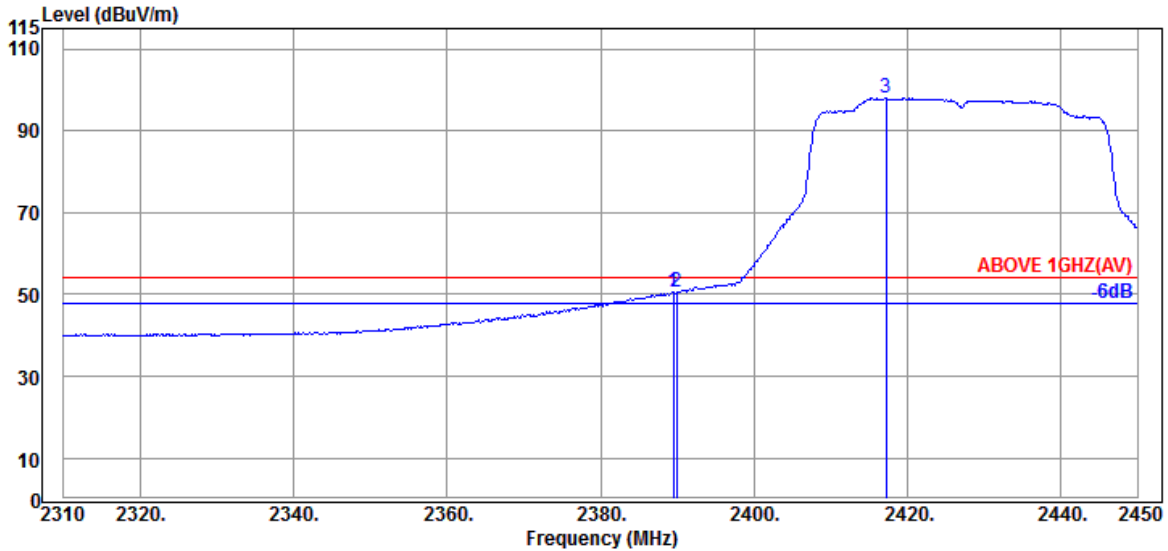


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	31.89	7.95	34.53	45.26	50.57	54.00	3.43	Average
2389.940	31.89	7.95	34.54	45.17	50.47	54.00	3.53	Average
@ 2417.240	31.94	7.96	34.54	92.63	97.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

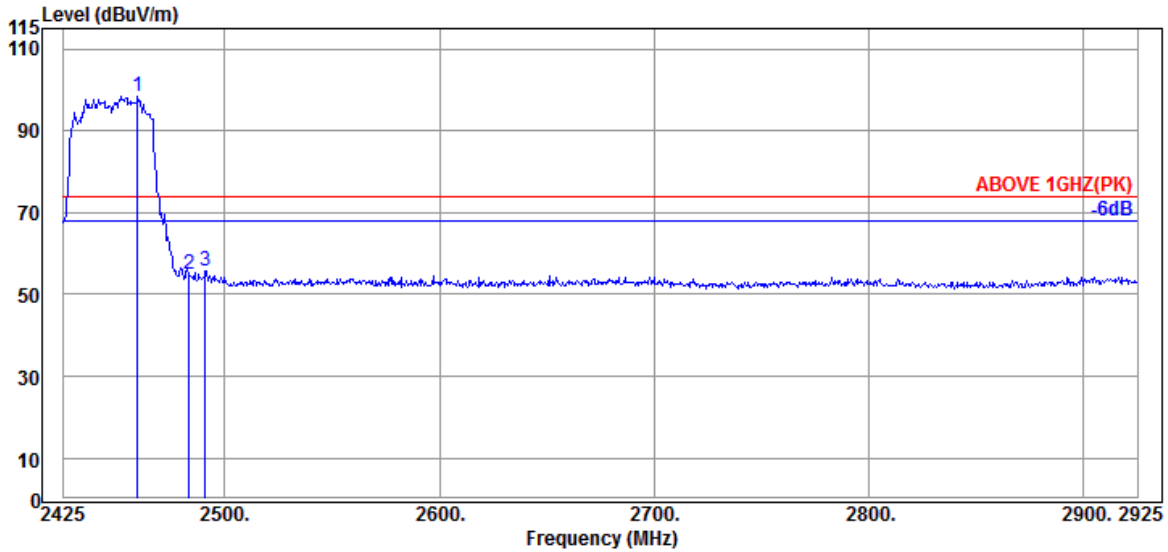

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	92.85	98.58	---	---	Peak
2483.500	32.30	7.99	34.55	49.25	54.99	74.00	19.01	Peak
2491.000	32.30	8.00	34.55	50.08	55.83	74.00	18.17	Peak

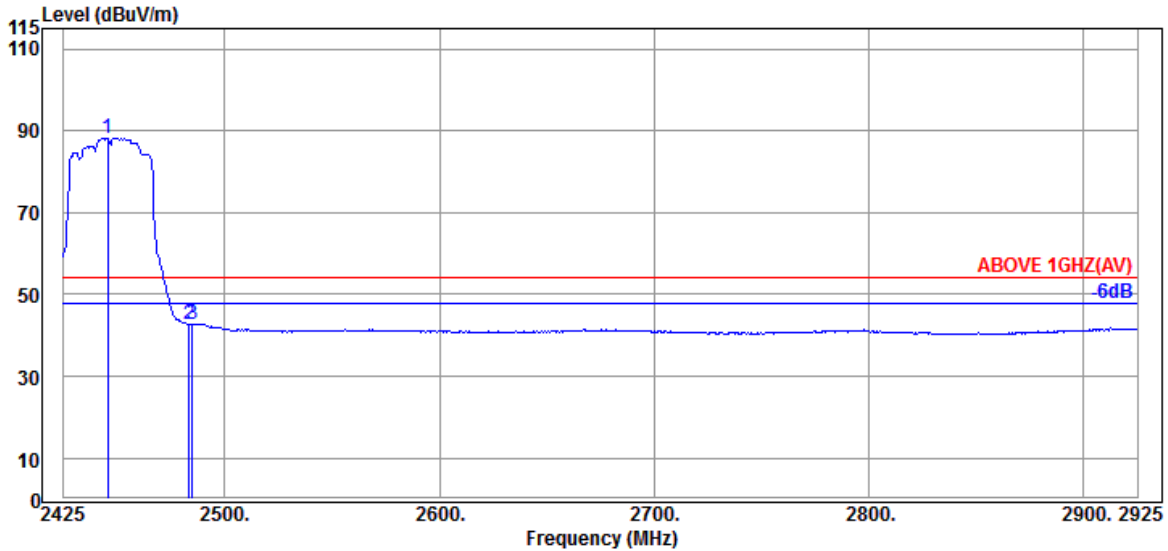


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.500	32.23	7.98	34.55	82.63	88.29	---	---	Average
2483.500	32.30	7.99	34.55	37.02	42.76	54.00	11.24	Average
2485.000	32.30	7.99	34.55	37.07	42.81	54.00	11.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

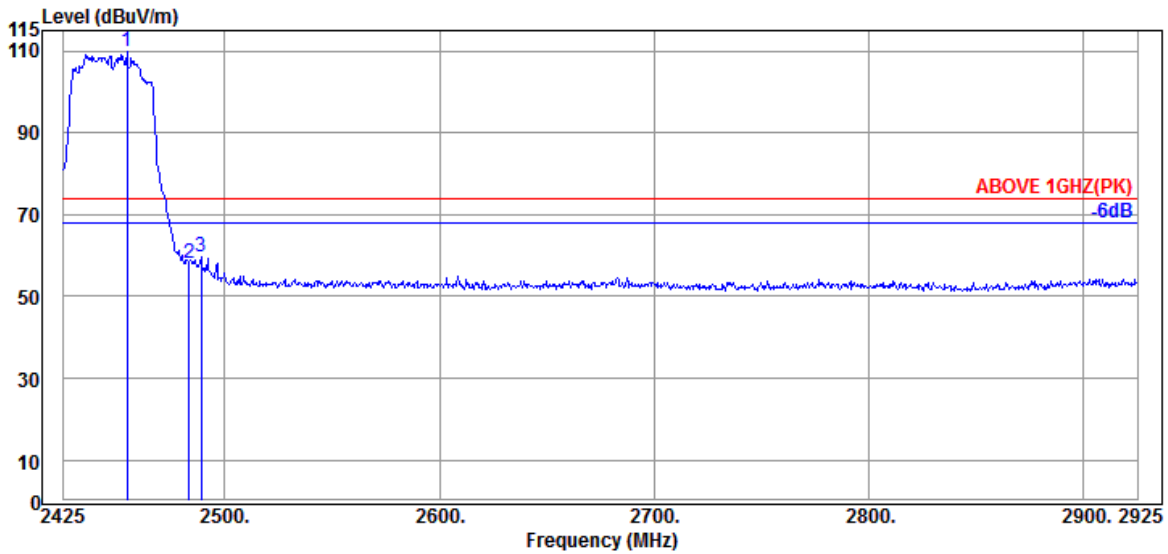

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	104.25	109.98	---	---	Peak
2483.500	32.30	7.99	34.55	52.31	58.05	74.00	15.95	Peak
2489.000	32.30	8.00	34.55	53.85	59.60	74.00	14.40	Peak

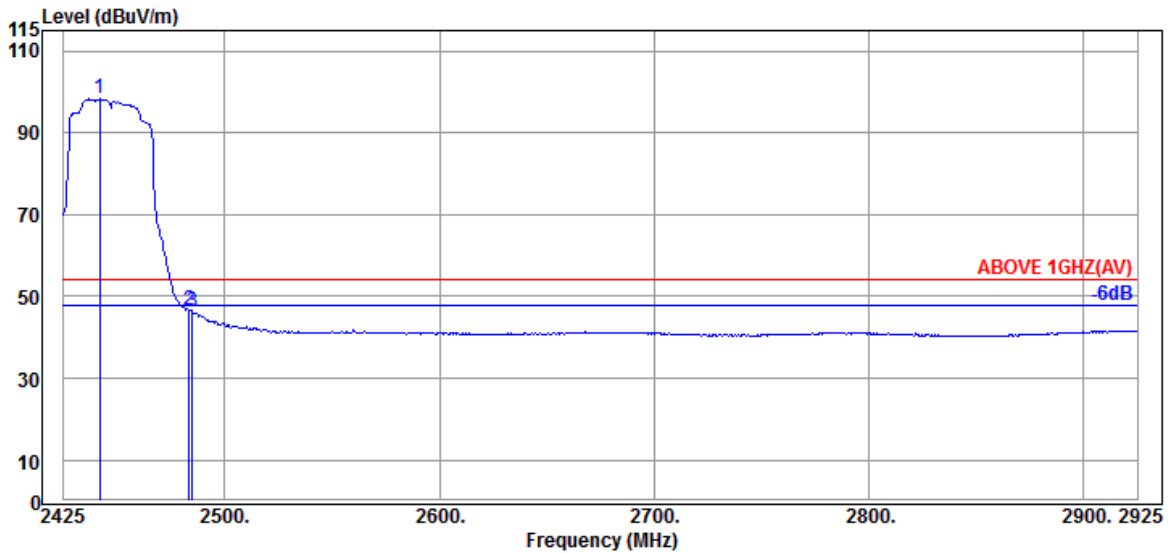


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.000	32.23	7.98	34.55	92.59	98.25	---	---	Average
2483.500	32.30	7.99	34.55	40.73	46.47	54.00	7.53	Average
2485.000	32.30	7.99	34.55	40.63	46.37	54.00	7.63	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

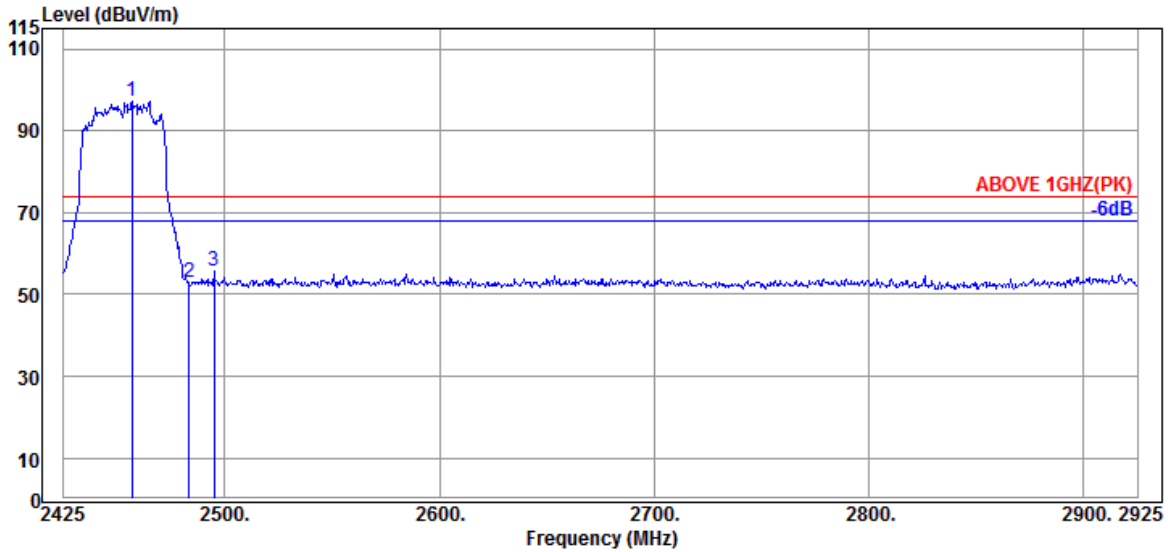

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	32.30	7.98	34.55	91.45	97.18	---	---	Peak
2483.500	32.30	7.99	34.55	47.16	52.90	74.00	21.10	Peak
2495.000	32.30	8.00	34.56	49.90	55.64	74.00	18.36	Peak

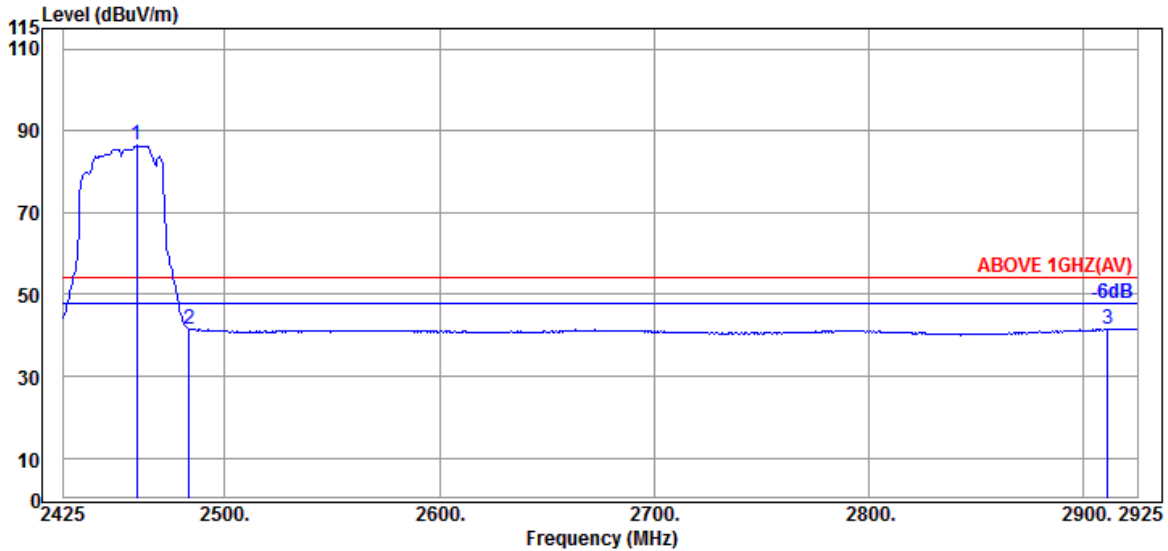


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	80.69	86.42	---	---	Average
2483.500	32.30	7.99	34.55	35.76	41.50	54.00	12.50	Average
2911.000	32.83	8.18	34.64	35.30	41.67	54.00	12.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

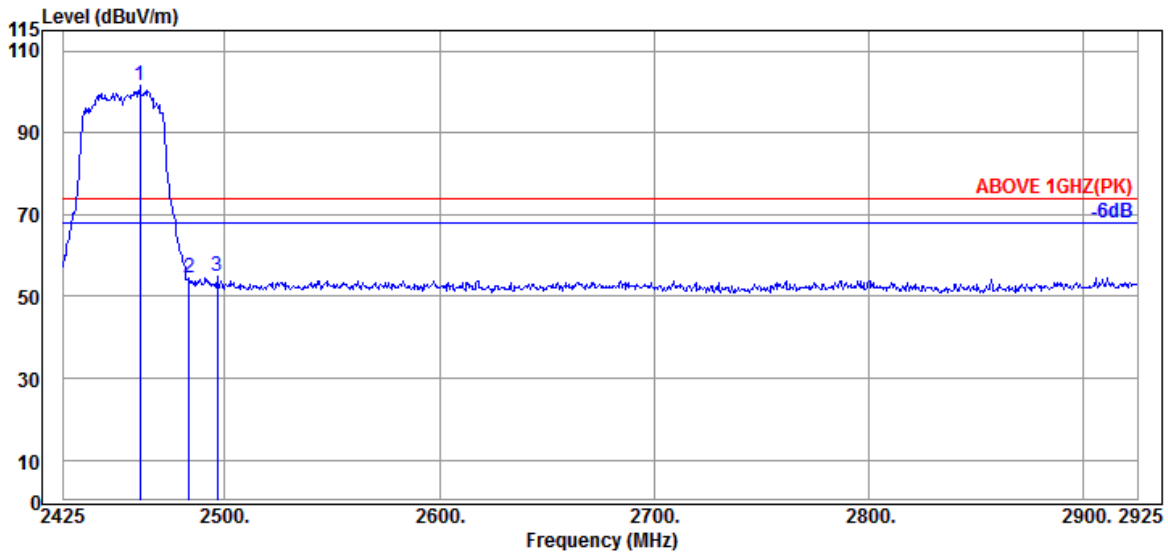

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	7.98	34.55	95.85	101.58	---	---	Peak
2483.500	32.30	7.99	34.55	48.65	54.39	74.00	19.61	Peak
2496.500	32.30	8.00	34.56	49.04	54.78	74.00	19.22	Peak

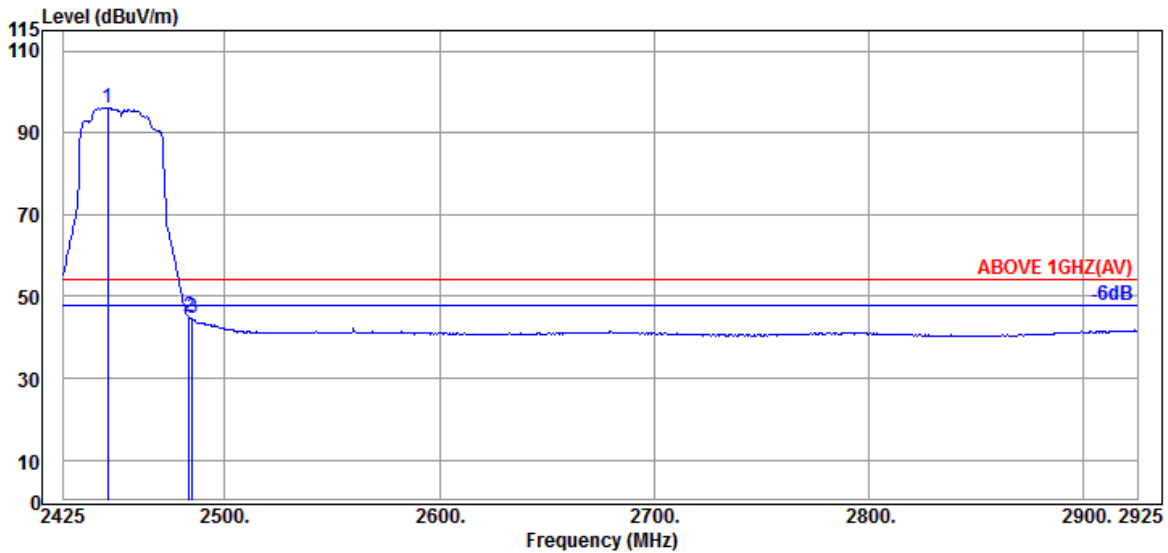


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.500	32.23	7.98	34.55	90.51	96.17	---	---	Average
2483.500	32.30	7.99	34.55	39.16	44.90	54.00	9.10	Average
2485.000	32.30	7.99	34.55	38.82	44.56	54.00	9.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

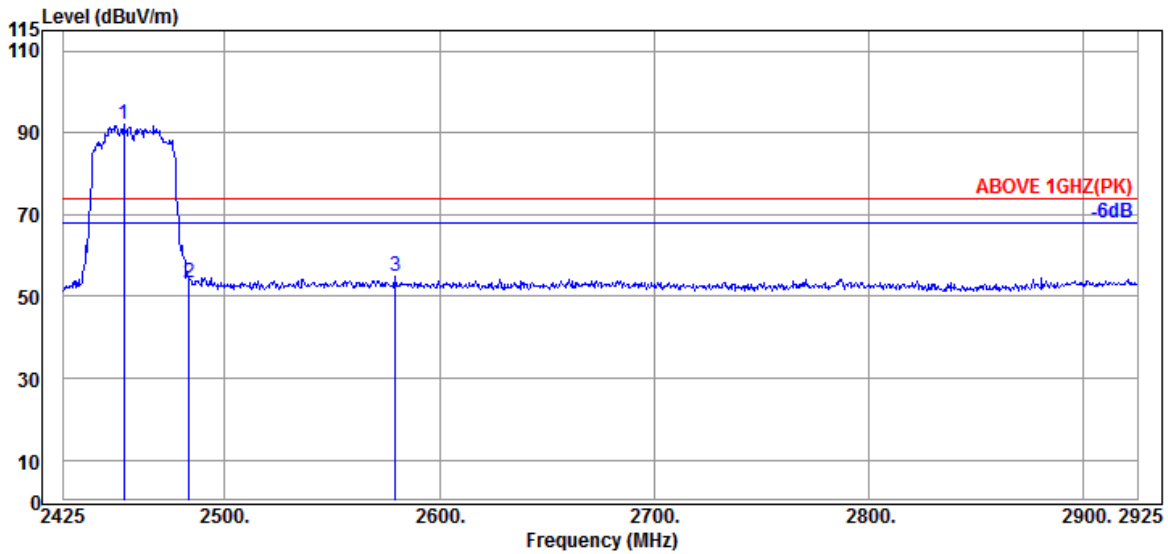

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	86.26	91.99	---	---	Peak
2483.500	32.30	7.99	34.55	47.78	53.52	74.00	20.48	Peak
2579.500	32.50	8.04	34.58	48.87	54.83	74.00	19.17	Peak

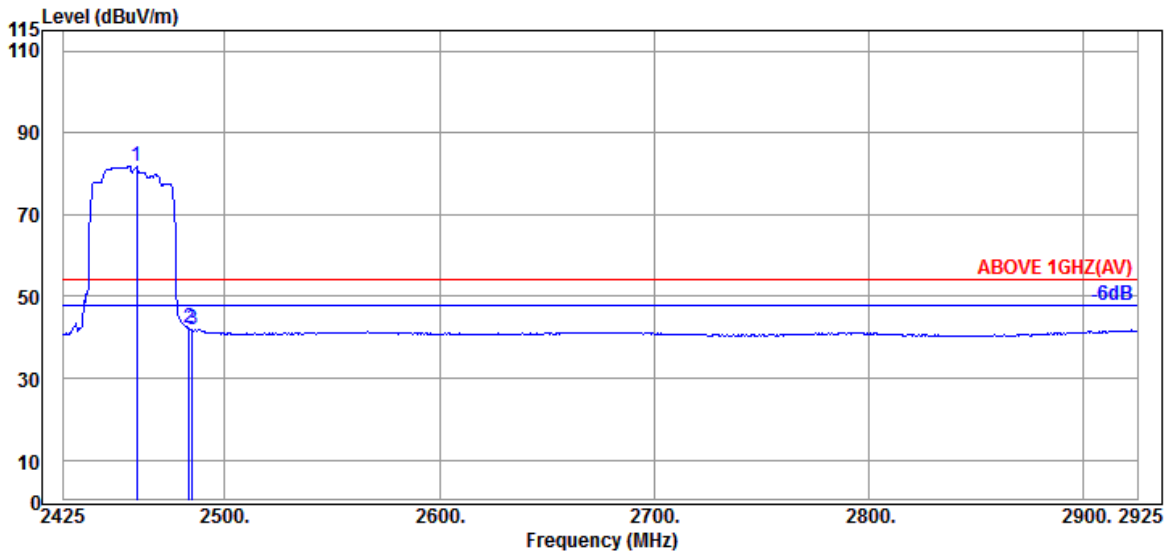


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	76.04	81.77	---	---	Average
2483.500	32.30	7.99	34.55	36.43	42.17	54.00	11.83	Average
2485.000	32.30	7.99	34.55	36.24	41.98	54.00	12.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

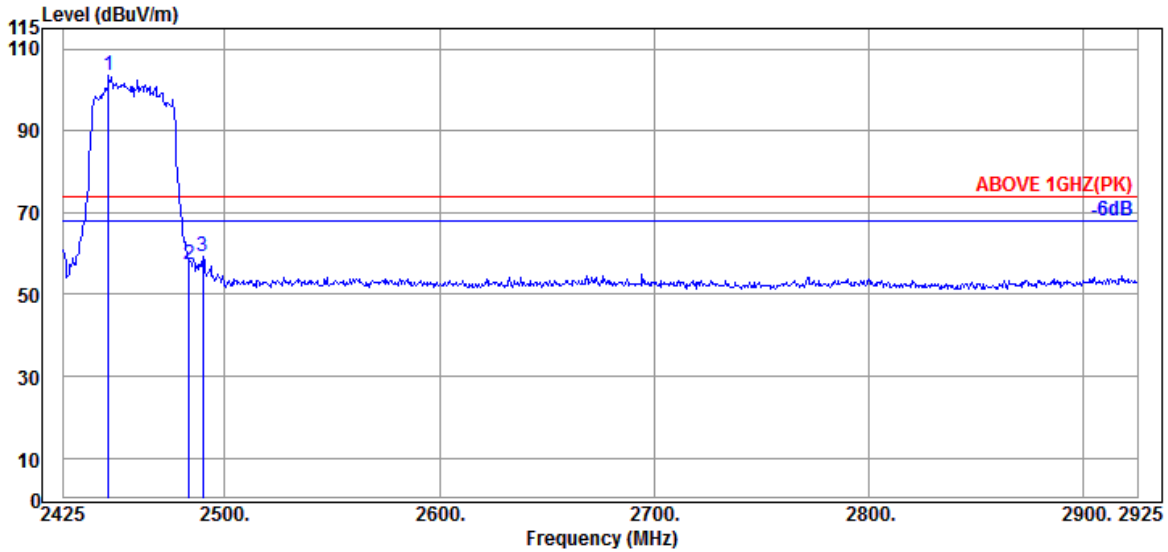

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	32.23	7.98	34.55	97.78	103.44	---	---	Peak
2483.500	32.30	7.99	34.55	51.49	57.23	74.00	16.77	Peak
2490.000	32.30	8.00	34.55	53.51	59.26	74.00	14.74	Peak

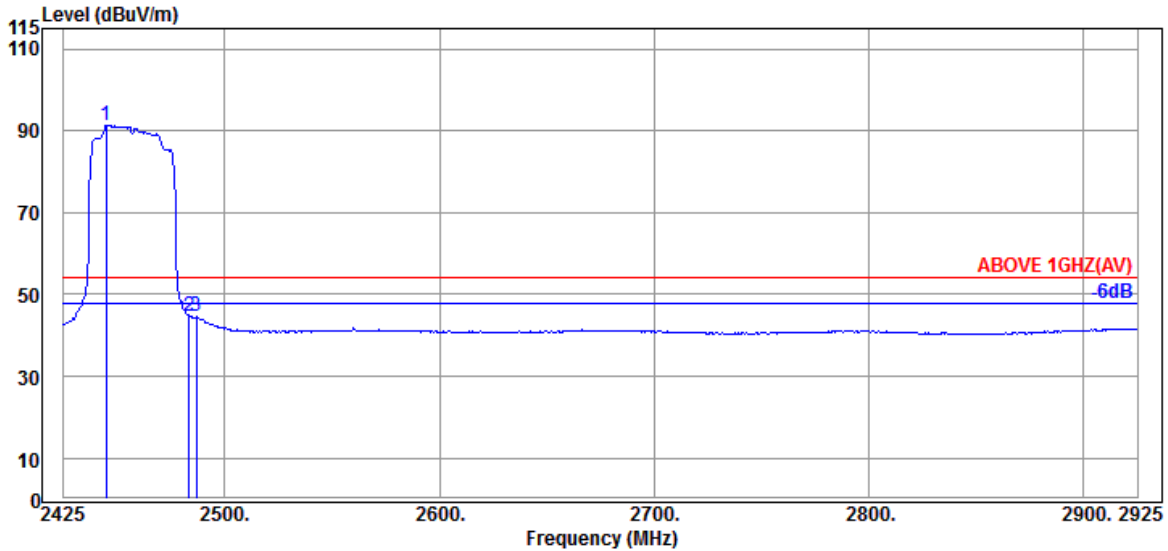


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	85.76	91.42	---	---	Average
2483.500	32.30	7.99	34.55	39.04	44.78	54.00	9.22	Average
2487.000	32.30	8.00	34.55	38.81	44.56	54.00	9.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

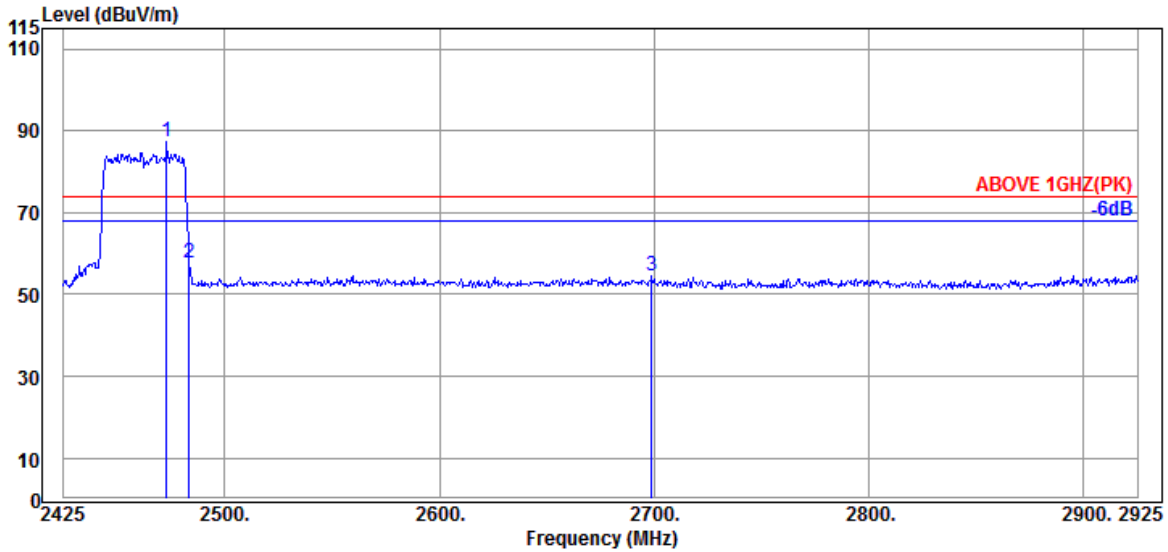

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.000	32.30	7.99	34.55	81.50	87.24	---	---	Peak
2483.500	32.30	7.99	34.55	51.84	57.58	74.00	16.42	Peak
2699.000	32.20	8.09	34.60	48.85	54.54	74.00	19.46	Peak

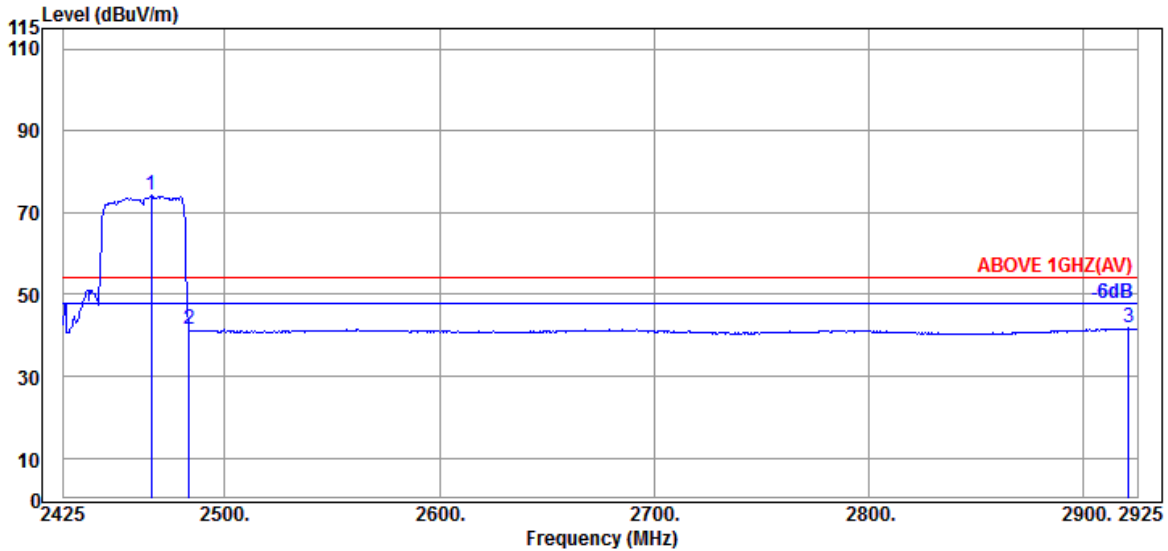


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	68.41	74.14	---	---	Average
2483.500	32.30	7.99	34.55	35.62	41.36	54.00	12.64	Average
2921.000	32.90	8.19	34.64	35.35	41.80	54.00	12.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

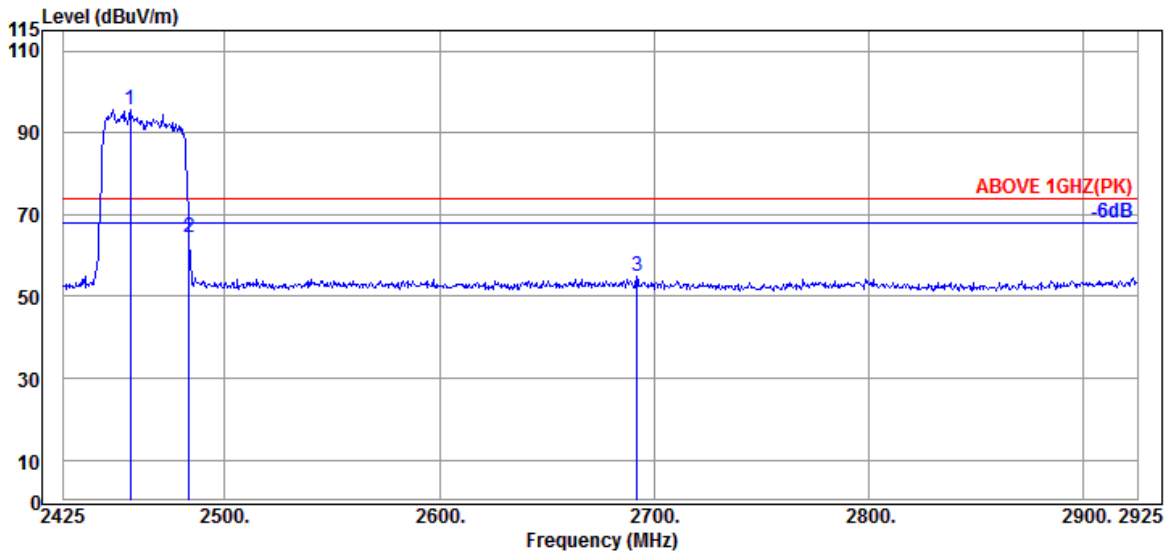

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	90.03	95.76	---	---	Peak
2483.500	32.30	7.99	34.55	58.50	64.24	74.00	9.76	Peak
2692.000	32.20	8.09	34.60	49.17	54.86	74.00	19.14	Peak

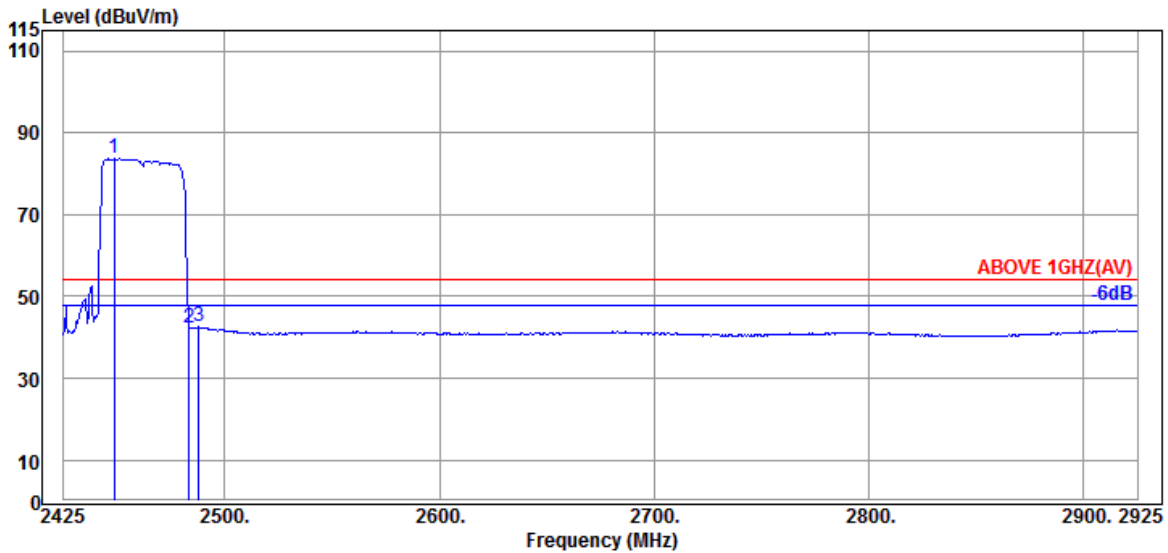


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	32.30	7.98	34.55	77.92	83.65	---	---	Average
2483.500	32.30	7.99	34.55	36.64	42.38	54.00	11.62	Average
2488.000	32.30	8.00	34.55	36.78	42.53	54.00	11.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

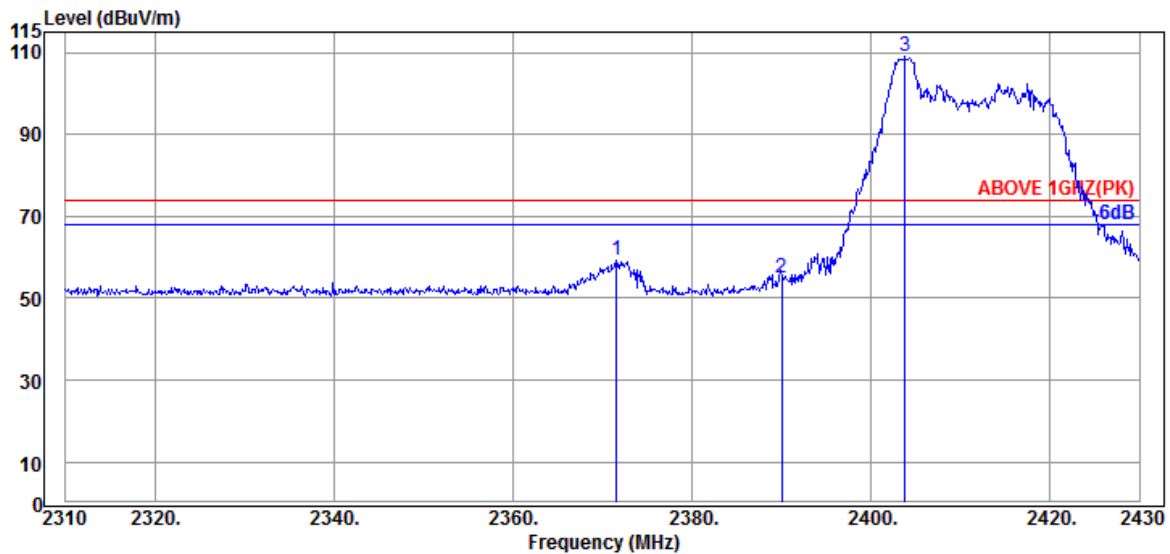

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.560	31.97	7.94	34.53	54.07	59.45	74.00	14.55	Peak
2390.040	31.89	7.95	34.54	49.79	55.09	74.00	18.91	Peak
@ 2403.840	31.80	7.95	34.54	103.81	109.02	---	---	Peak

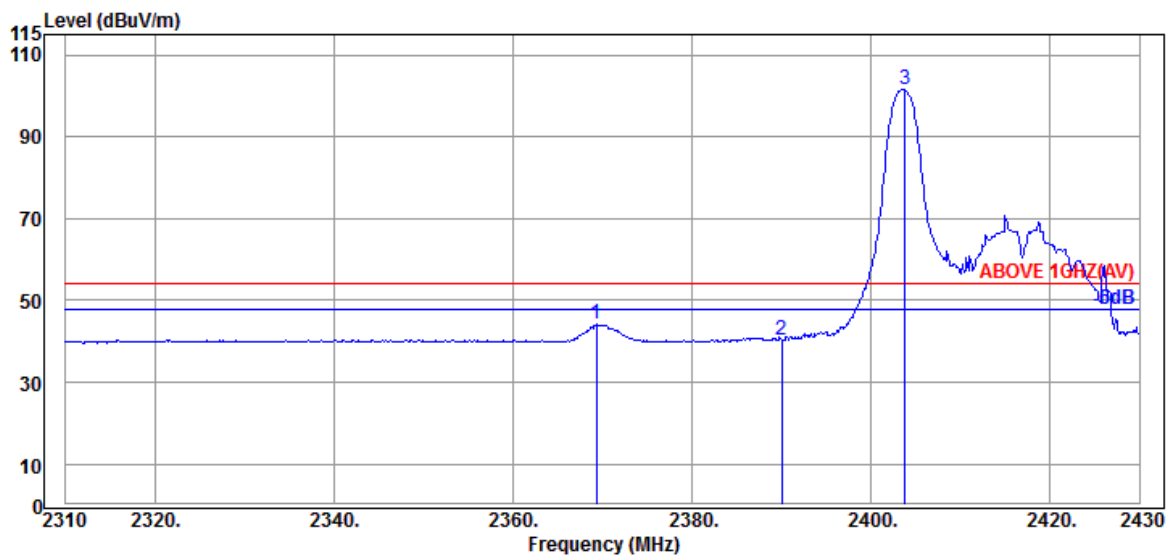


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.280	32.01	7.94	34.53	38.72	44.14	54.00	9.86	Average
2390.040	31.89	7.95	34.54	35.17	40.47	54.00	13.53	Average
@ 2403.840	31.80	7.95	34.54	96.37	101.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

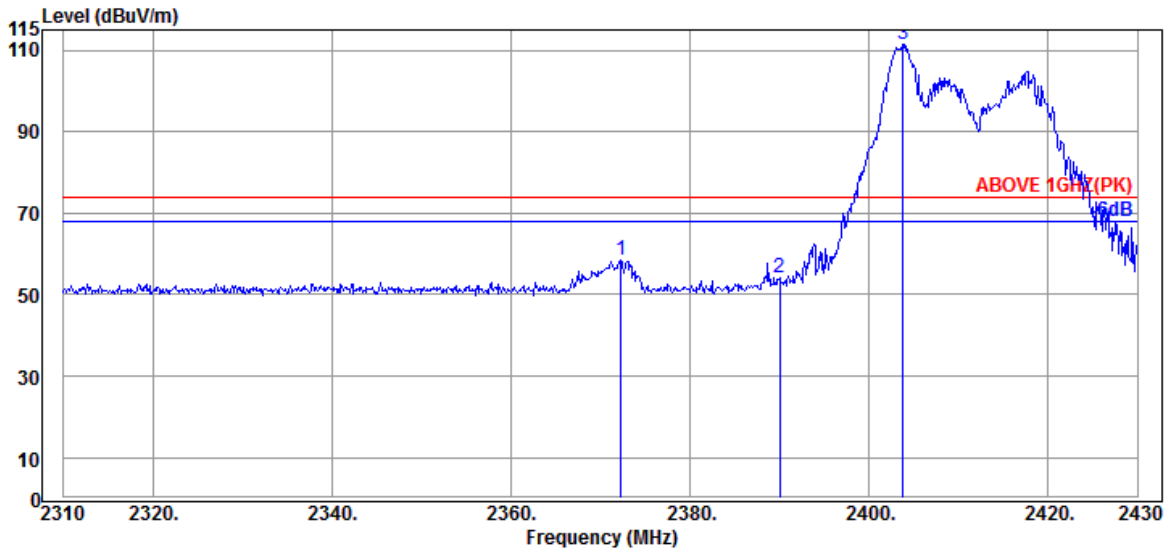

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.280	31.97	7.94	34.53	53.05	58.43	74.00	15.57	Peak
2390.040	31.89	7.95	34.54	48.80	54.10	74.00	19.90	Peak
@ 2403.840	31.80	7.95	34.54	106.34	111.55	---	---	Peak

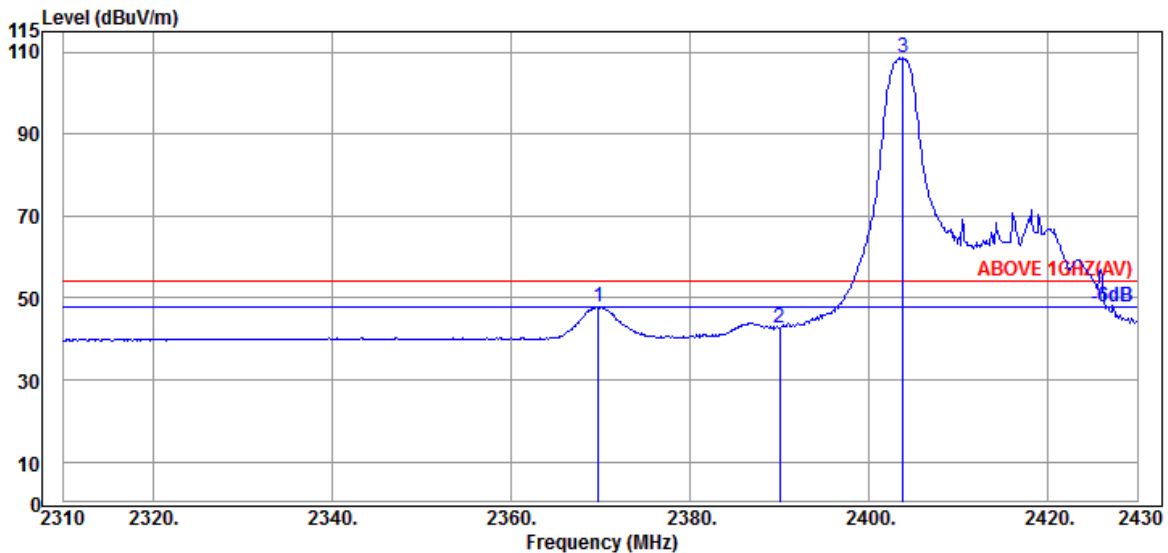


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.760	31.97	7.94	34.53	42.39	47.77	54.00	6.23	Average
2390.040	31.89	7.95	34.54	37.56	42.86	54.00	11.14	Average
@ 2403.840	31.80	7.95	34.54	103.40	108.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

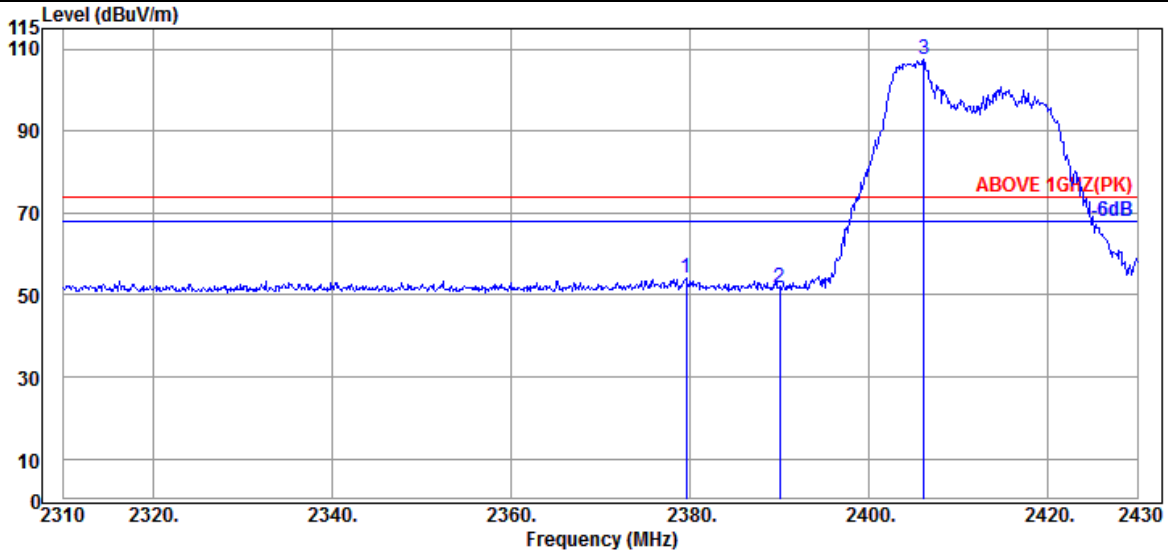

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.600	31.93	7.95	34.53	48.69	54.04	74.00	19.96	Peak
2390.040	31.89	7.95	34.54	46.51	51.81	74.00	22.19	Peak
@ 2406.120	31.87	7.95	34.54	102.11	107.39	---	---	Peak

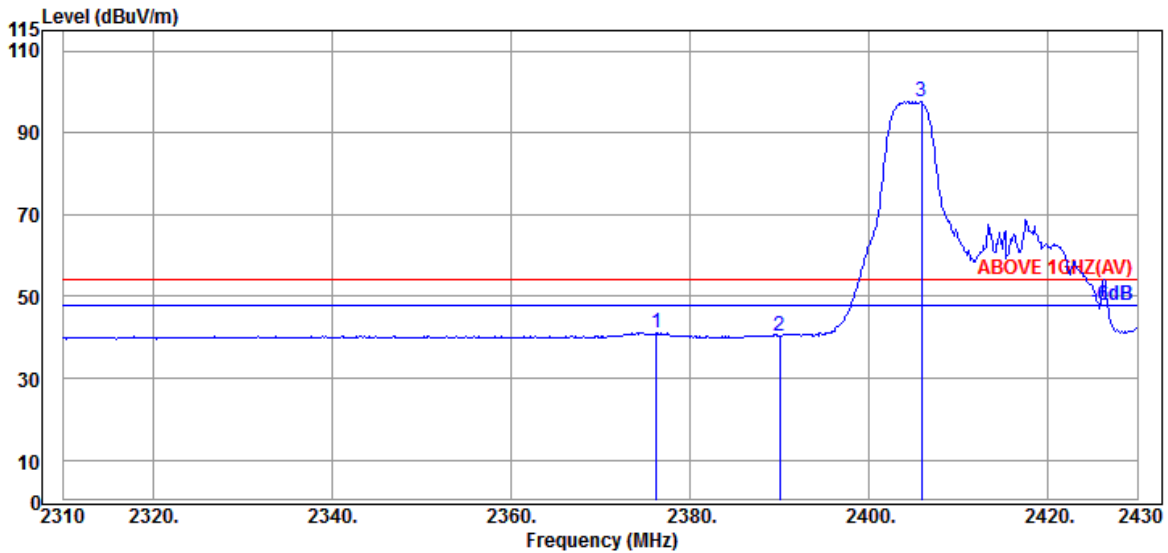


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.240	31.97	7.94	34.53	35.72	41.10	54.00	12.90	Average
2390.040	31.89	7.95	34.54	35.07	40.37	54.00	13.63	Average
@ 2405.880	31.87	7.95	34.54	92.27	97.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

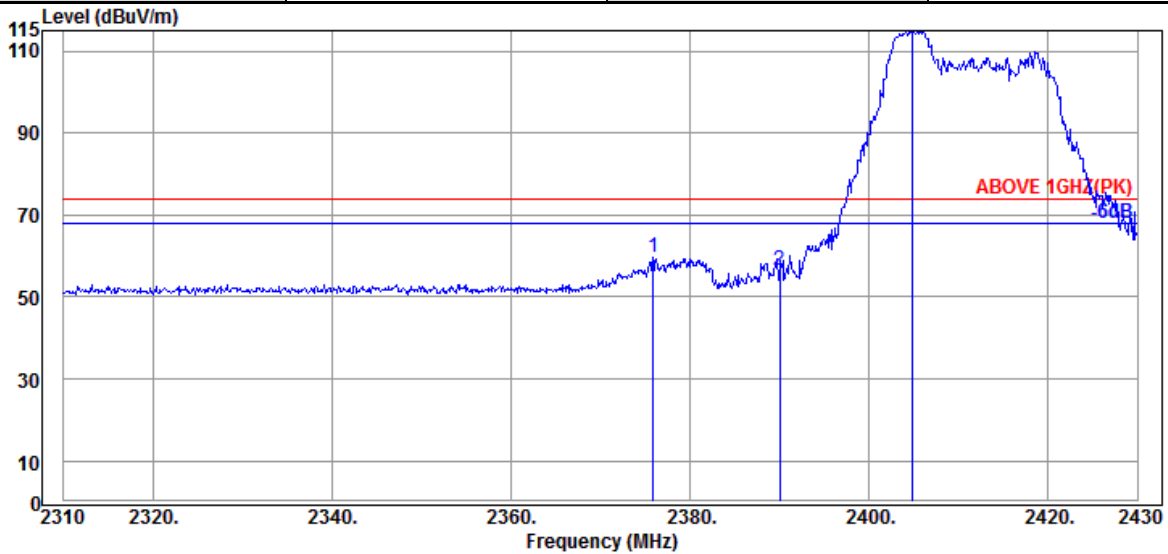

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.880	31.97	7.94	34.53	54.23	59.61	74.00	14.39	Peak
2390.040	31.89	7.95	34.54	51.32	56.62	74.00	17.38	Peak
@ 2404.920	31.87	7.95	34.54	109.59	114.87	---	---	Peak

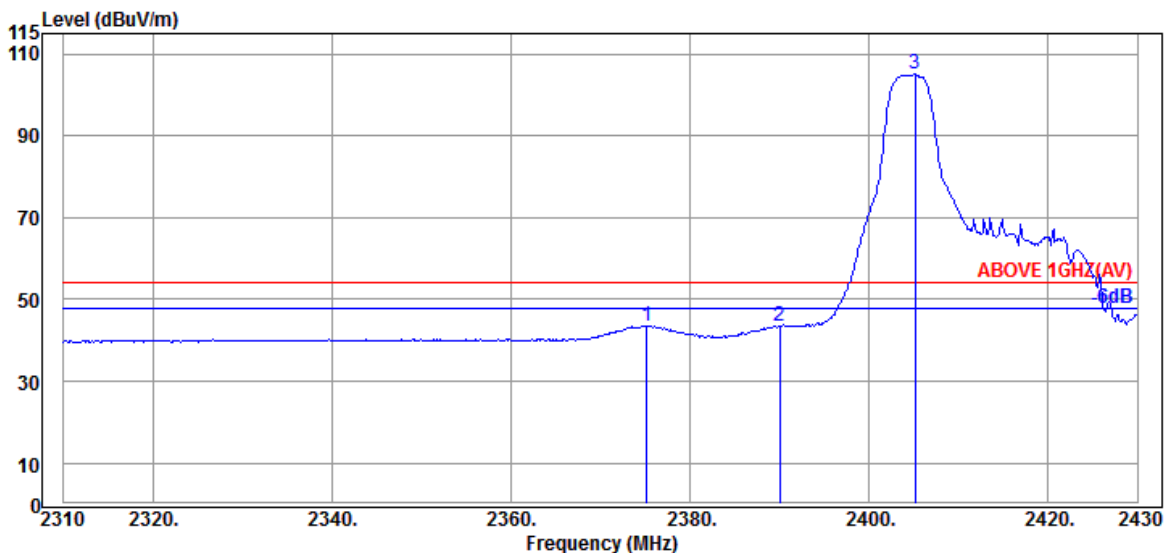


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.160	31.97	7.94	34.53	38.20	43.58	54.00	10.42	Average
2390.040	31.89	7.95	34.54	38.20	43.50	54.00	10.50	Average
@ 2405.160	31.87	7.95	34.54	99.71	104.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

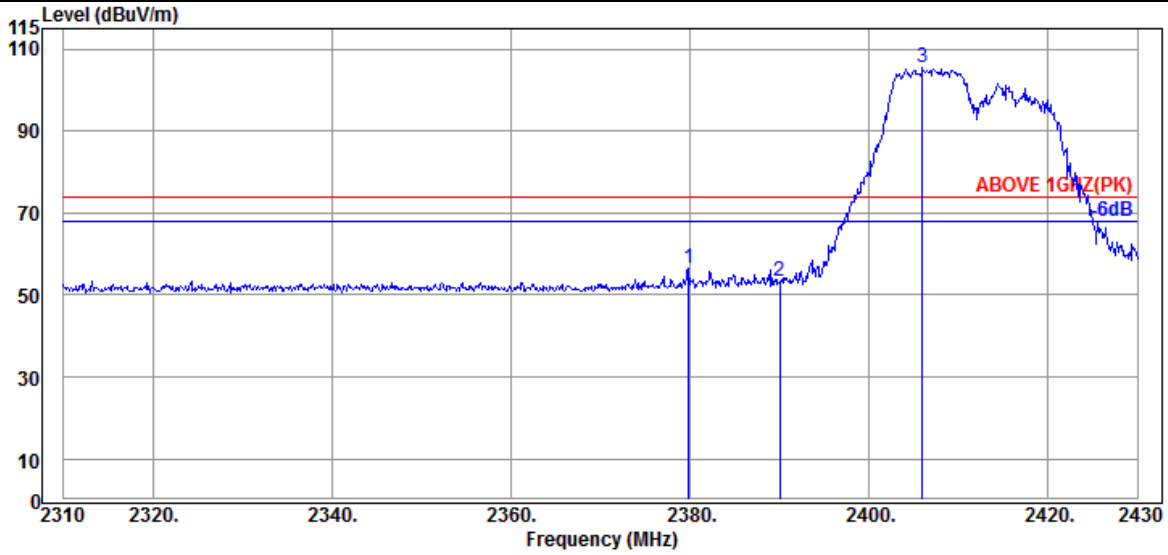

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.840	31.93	7.95	34.53	51.23	56.58	74.00	17.42	Peak
2390.040	31.89	7.95	34.54	48.07	53.37	74.00	20.63	Peak
@ 2406.000	31.87	7.95	34.54	100.13	105.41	---	---	Peak

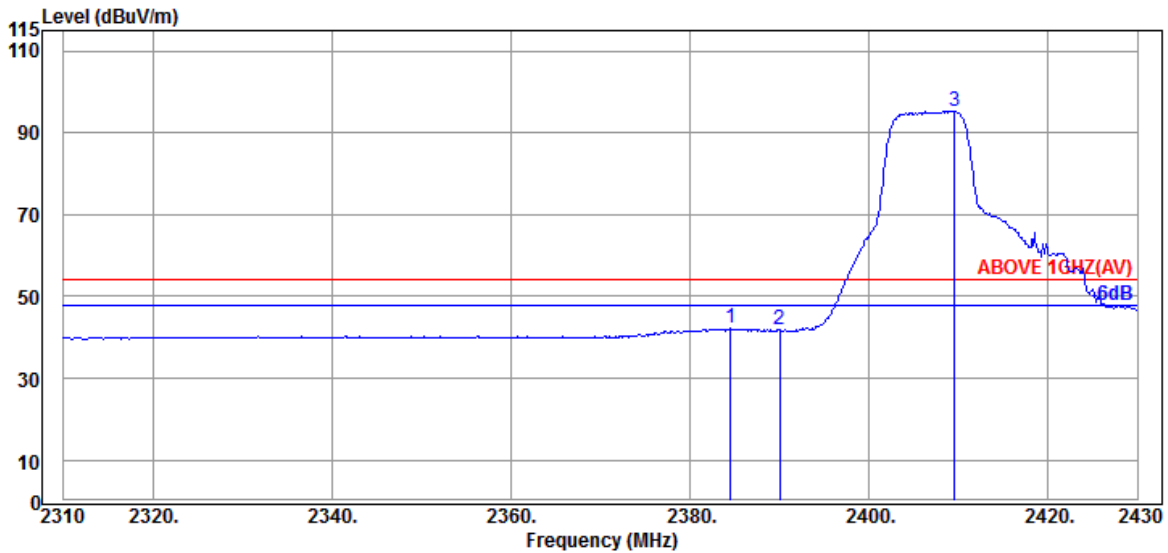


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.520	31.89	7.95	34.53	36.88	42.19	54.00	11.81	Average
2390.040	31.89	7.95	34.54	36.56	41.86	54.00	12.14	Average
@ 2409.600	31.87	7.96	34.54	90.04	95.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

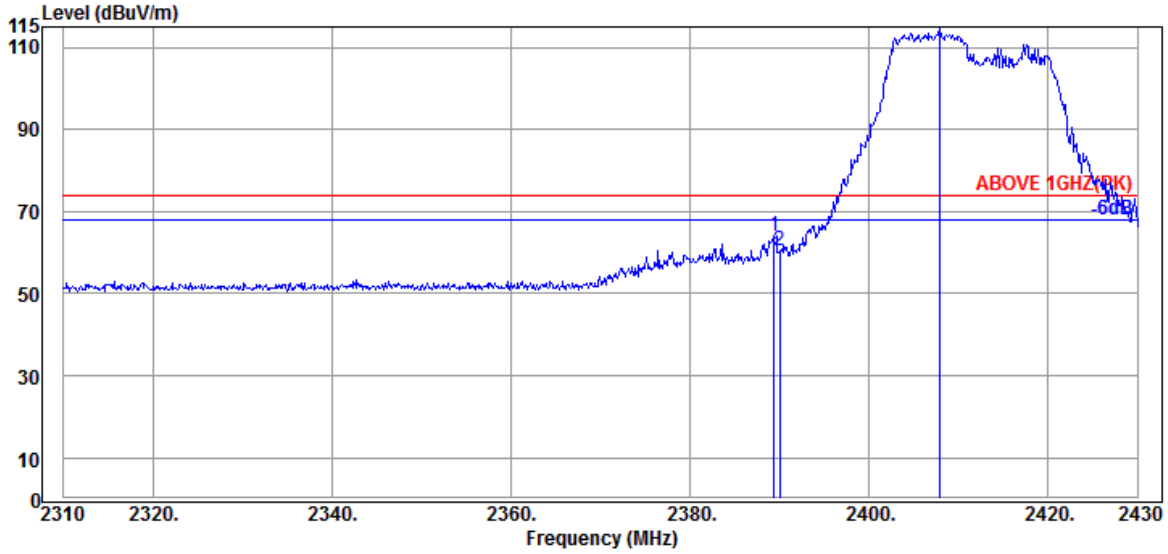

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	58.84	64.15	74.00	9.85	Peak
2390.040	31.89	7.95	34.54	55.19	60.49	74.00	13.51	Peak
@ 2407.920	31.87	7.96	34.54	109.34	114.63	---	---	Peak

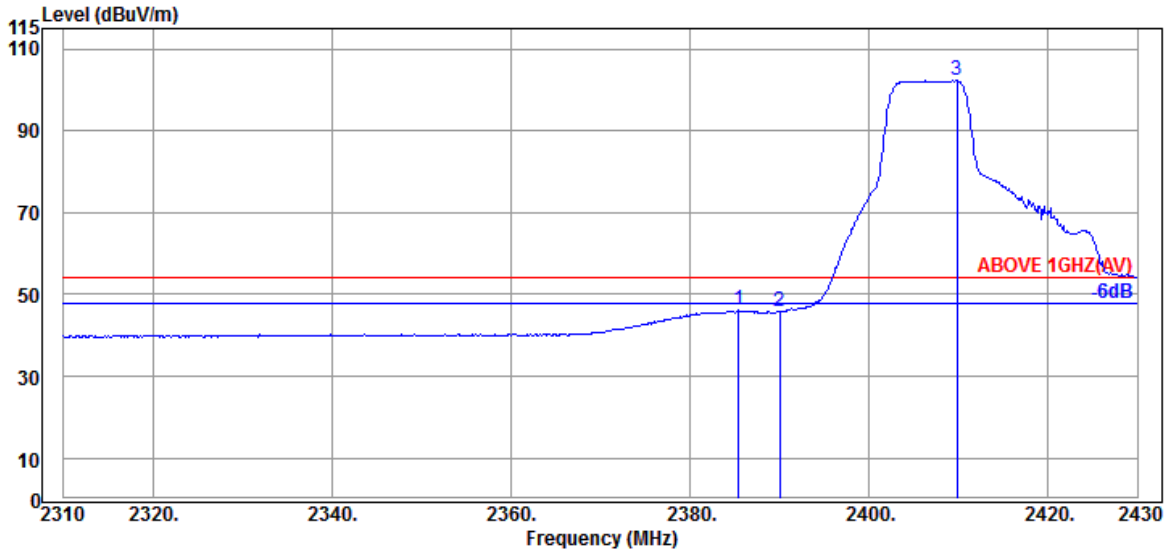


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.480	31.89	7.95	34.53	40.74	46.05	54.00	7.95	Average
2390.040	31.89	7.95	34.54	40.49	45.79	54.00	8.21	Average
@ 2409.840	31.87	7.96	34.54	96.98	102.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

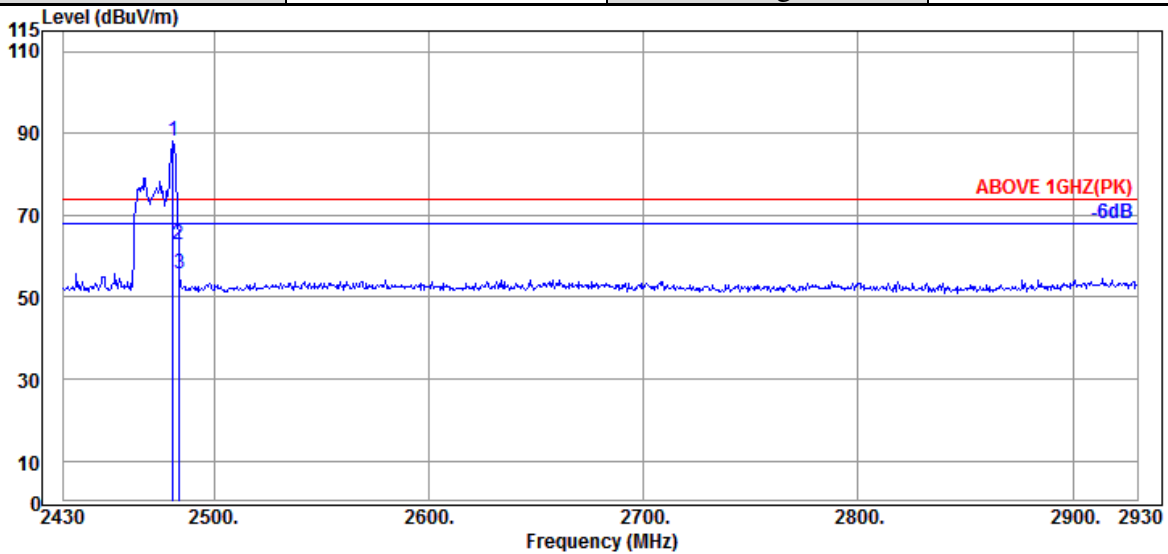

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2481.000	32.30	7.99	34.55	82.57	88.31	---	---	Peak
	2483.500	32.30	7.99	34.55	56.91	62.65	74.00	11.35	Peak
	2484.000	32.30	7.99	34.55	49.87	55.61	74.00	18.39	Peak

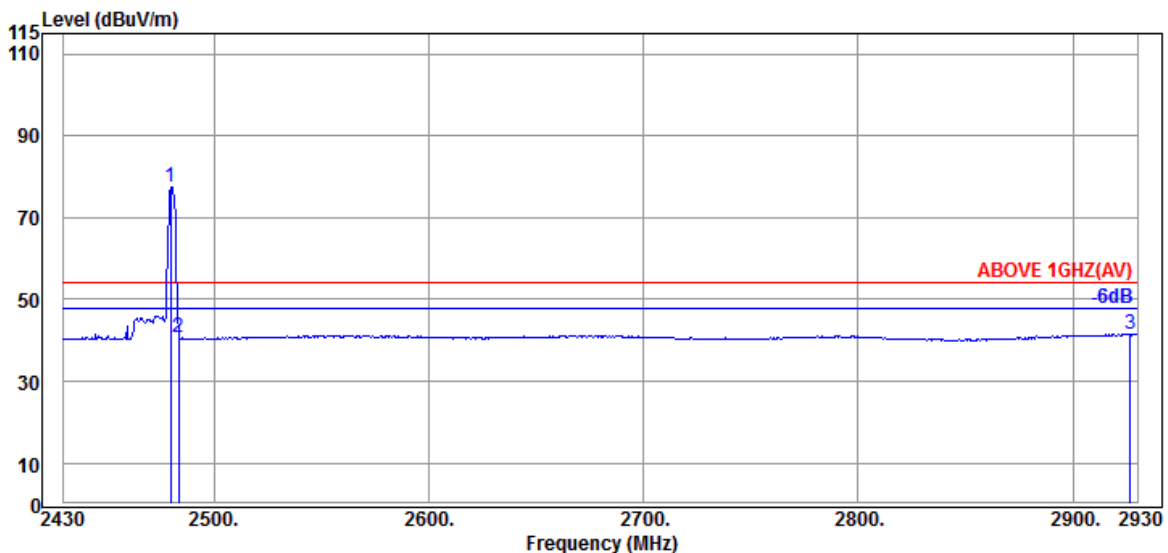


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	32.30	7.99	34.55	71.65	77.39	---	---	Average
	2483.500	32.30	7.99	34.55	35.16	40.90	54.00	13.10	Average
	2926.500	32.97	8.19	34.65	35.07	41.58	54.00	12.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

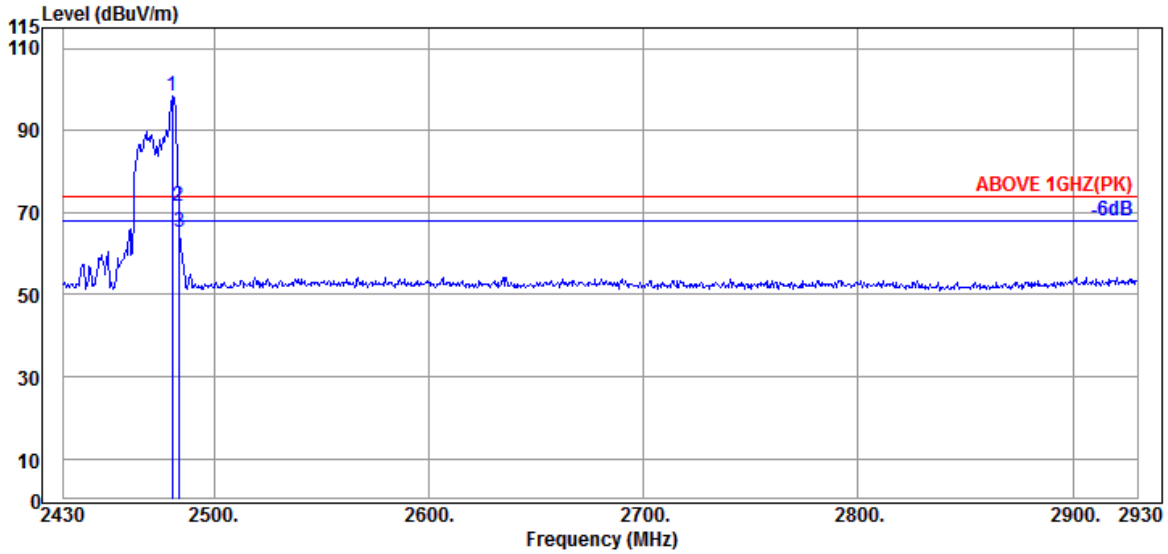

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	92.83	98.57	---	---	Peak
2483.500	32.30	7.99	34.55	65.63	71.37	74.00	2.63	Peak
2484.000	32.30	7.99	34.55	59.54	65.28	74.00	8.72	Peak

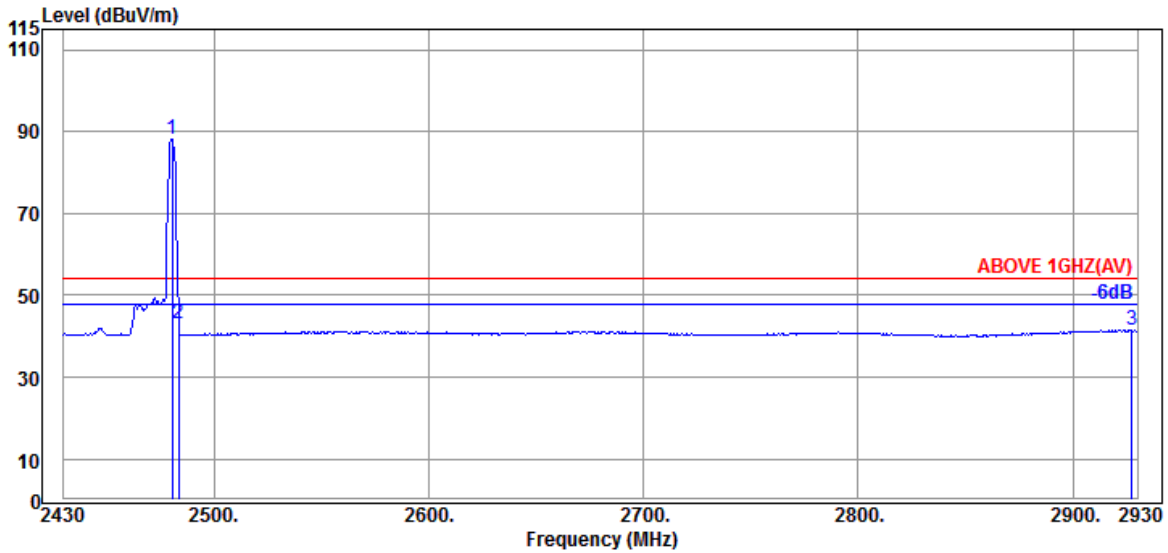


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	82.47	88.21	---	---	Average
2483.500	32.30	7.99	34.55	37.43	43.17	54.00	10.83	Average
2927.500	32.97	8.19	34.65	34.96	41.47	54.00	12.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

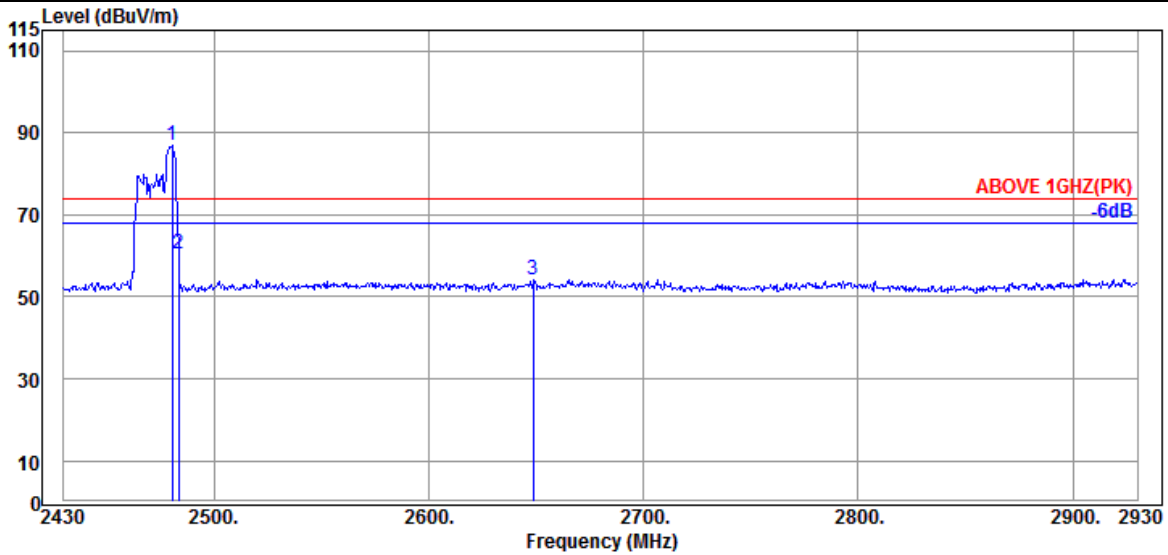

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	81.01	86.75	---	---	Peak
2483.500	32.30	7.99	34.55	54.66	60.40	74.00	13.60	Peak
2648.500	32.20	8.07	34.59	48.59	54.27	74.00	19.73	Peak

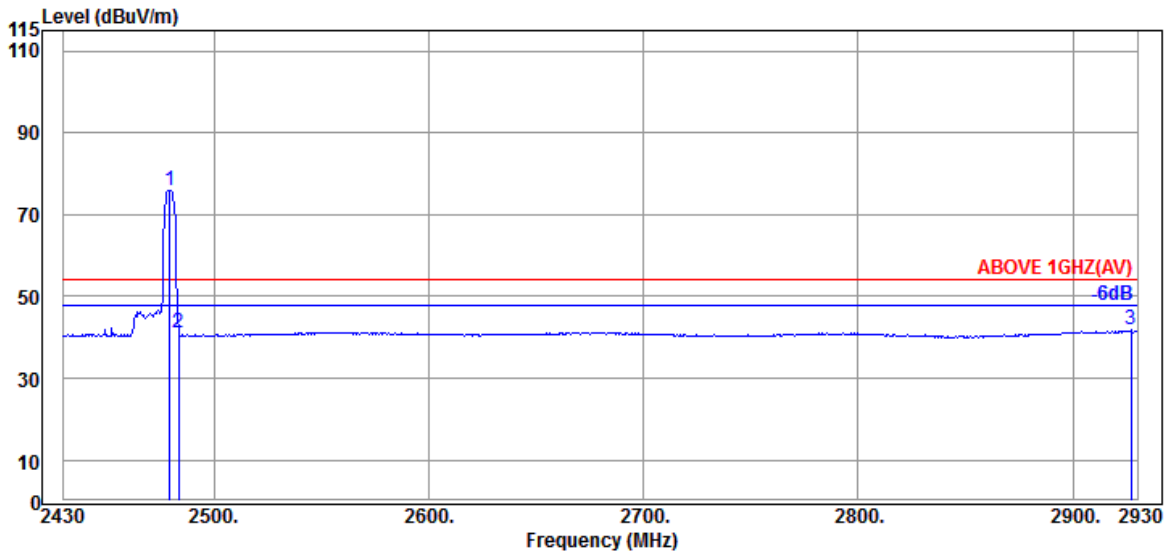


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	70.28	76.02	---	---	Average
2483.500	32.30	7.99	34.55	35.27	41.01	54.00	12.99	Average
2927.000	32.97	8.19	34.65	35.25	41.76	54.00	12.24	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

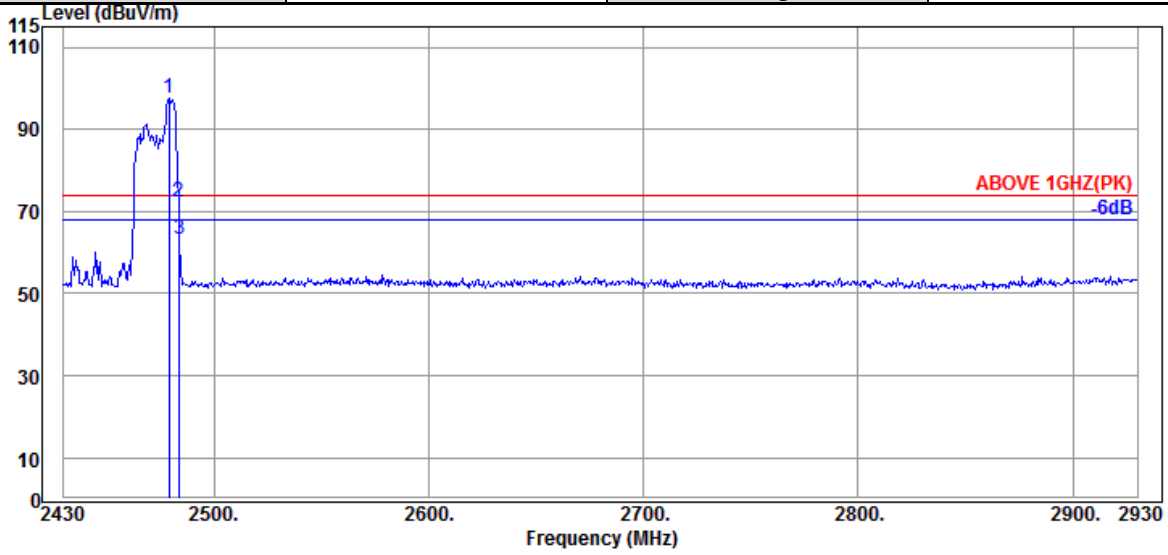

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	91.69	97.43	---	---	Peak
2483.500	32.30	7.99	34.55	66.52	72.26	74.00	1.74	Peak
2484.000	32.30	7.99	34.55	57.69	63.43	74.00	10.57	Peak

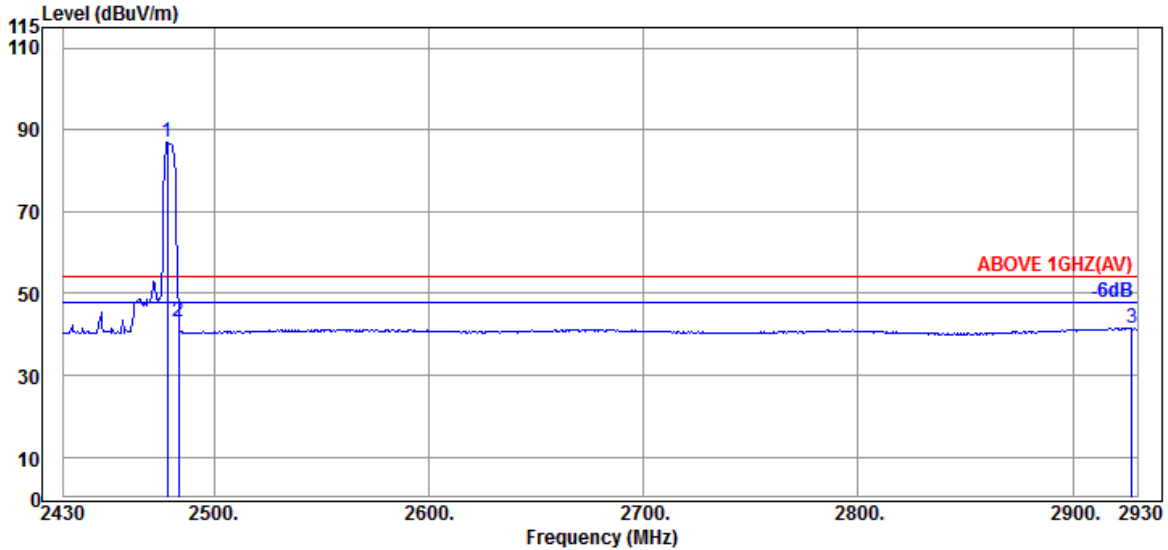


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	81.38	87.12	---	---	Average
2483.500	32.30	7.99	34.55	37.15	42.89	54.00	11.11	Average
2927.500	32.97	8.19	34.65	35.13	41.64	54.00	12.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

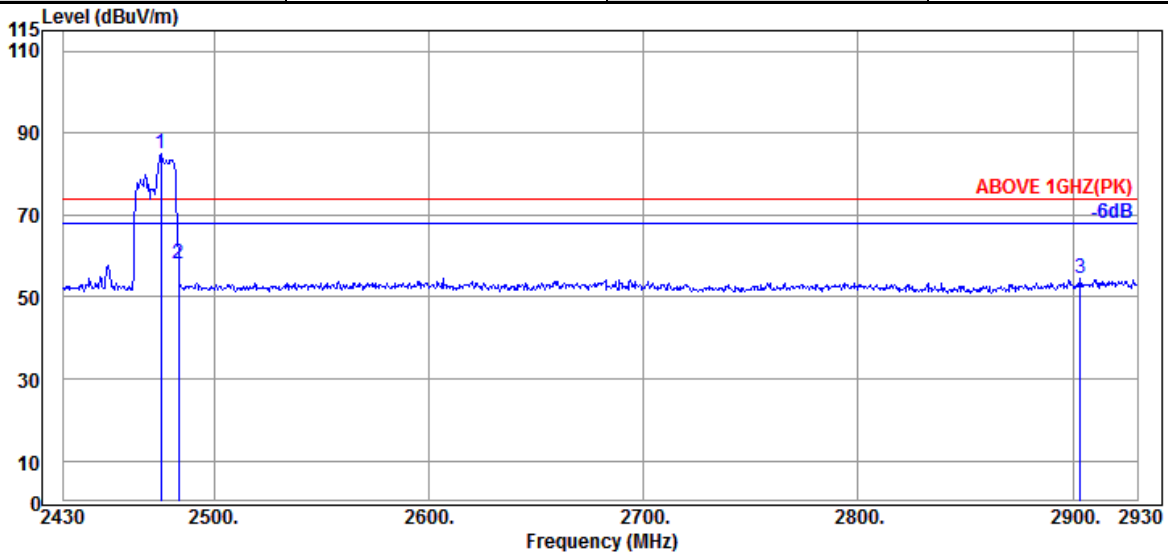

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.500	32.30	7.99	34.55	79.06	84.80	---	---	Peak
	2483.500	32.30	7.99	34.55	52.50	58.24	74.00	15.76	Peak
	2903.500	32.77	8.18	34.64	48.23	54.54	74.00	19.46	Peak

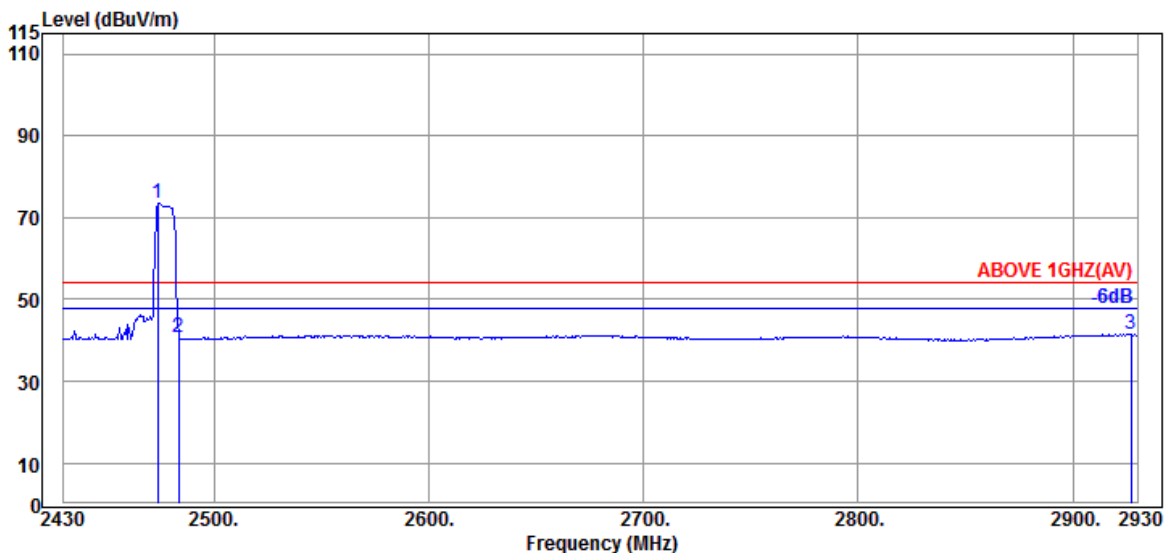


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.000	32.30	7.99	34.55	67.89	73.63	---	---	Average
	2483.500	32.30	7.99	34.55	34.99	40.73	54.00	13.27	Average
	2927.000	32.97	8.19	34.65	35.00	41.51	54.00	12.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

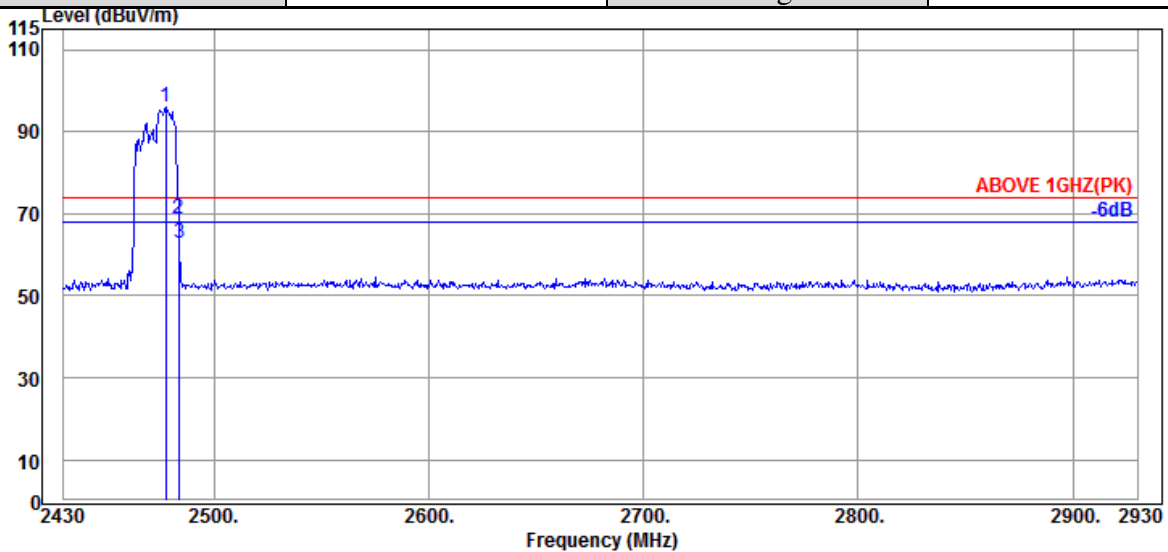

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	32.30	7.99	34.55	90.41	96.15	---	---	Peak
2483.500	32.30	7.99	34.55	63.19	68.93	74.00	5.07	Peak
2484.000	32.30	7.99	34.55	56.95	62.69	74.00	11.31	Peak

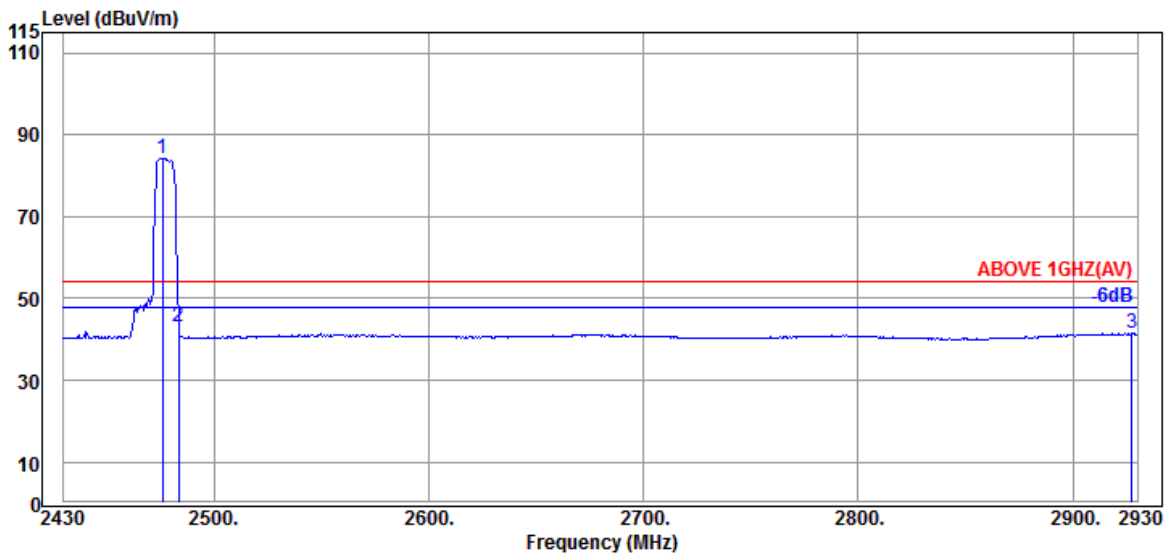


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	32.30	7.99	34.55	78.59	84.33	---	---	Average
2483.500	32.30	7.99	34.55	37.17	42.91	54.00	11.09	Average
2927.500	32.97	8.19	34.65	35.00	41.51	54.00	12.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

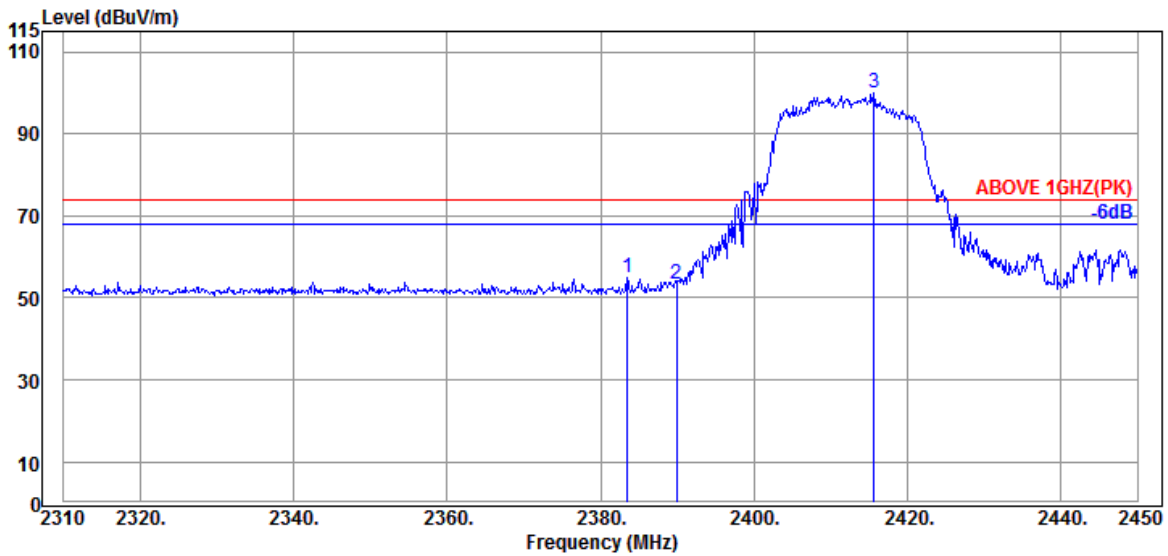

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.500	31.89	7.95	34.53	49.69	55.00	74.00	19.00	Peak
2389.940	31.89	7.95	34.54	48.16	53.46	74.00	20.54	Peak
@ 2415.700	31.94	7.96	34.54	94.58	99.94	---	---	Peak

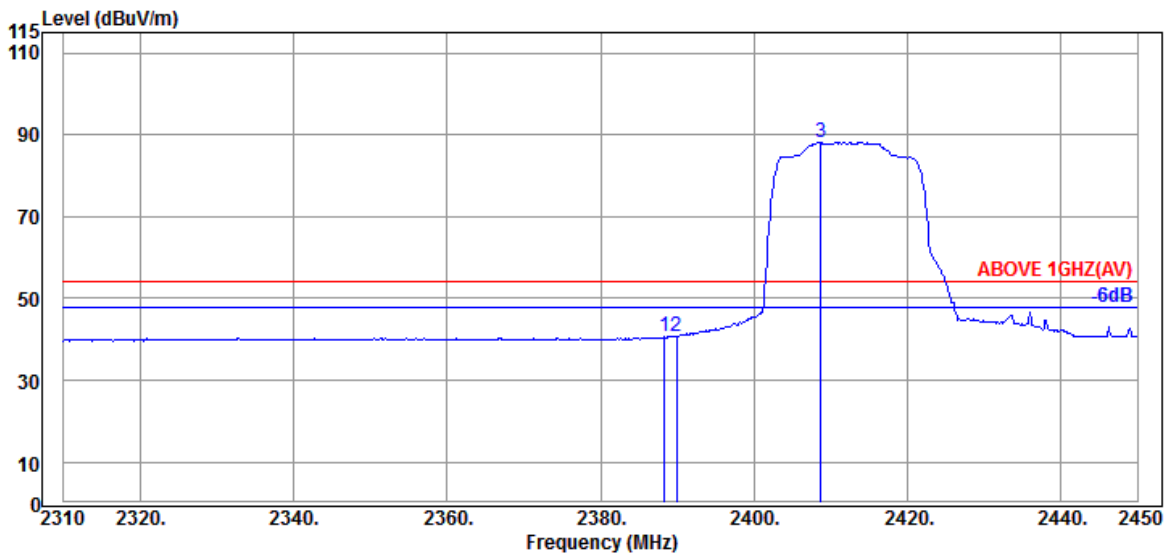


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	31.89	7.95	34.53	35.47	40.78	54.00	13.22	Average
2389.940	31.89	7.95	34.54	35.52	40.82	54.00	13.18	Average
@ 2408.700	31.87	7.96	34.54	82.92	88.21	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

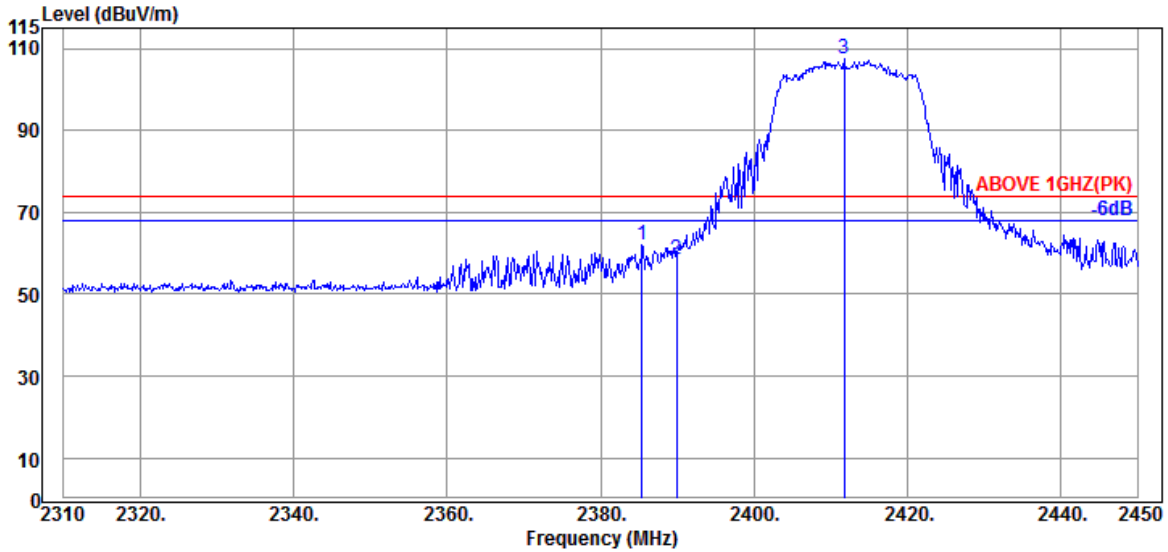

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.460	31.89	7.95	34.53	56.55	61.86	74.00	12.14	Peak
2389.940	31.89	7.95	34.54	53.33	58.63	74.00	15.37	Peak
@ 2411.780	31.94	7.96	34.54	102.05	107.41	---	---	Peak

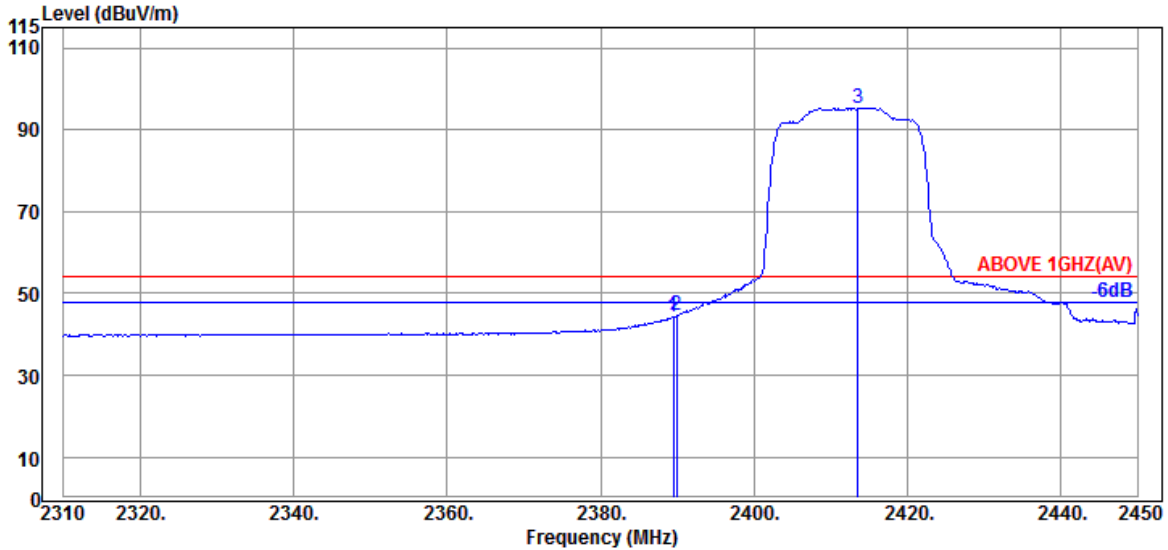


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	31.89	7.95	34.53	38.84	44.15	54.00	9.85	Average
2389.940	31.89	7.95	34.54	39.20	44.50	54.00	9.50	Average
@ 2413.600	31.94	7.96	34.54	90.01	95.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

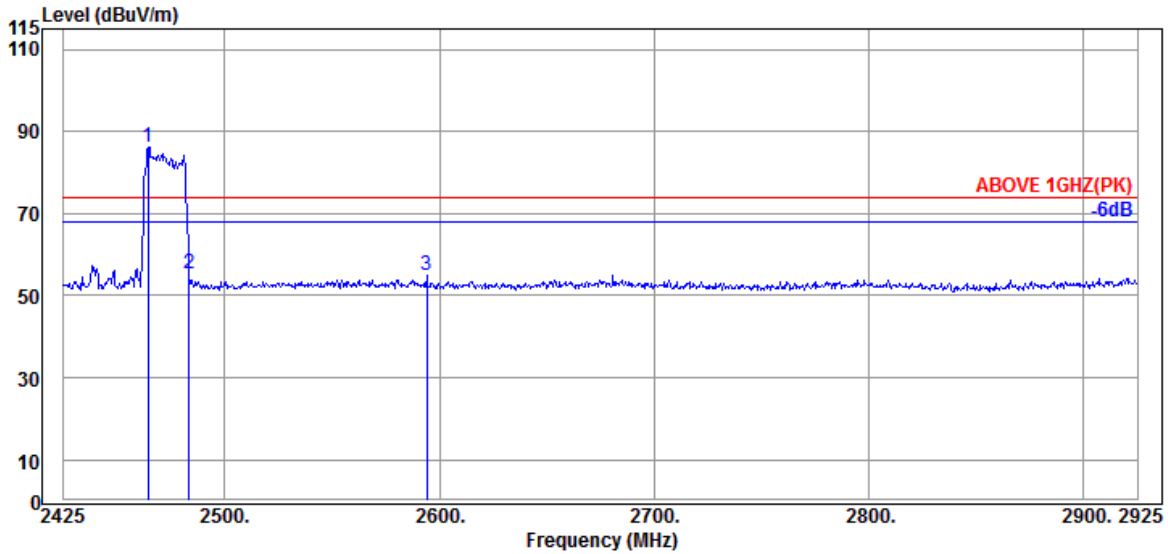

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	80.49	86.22	---	---	Peak
2483.500	32.30	7.99	34.55	49.57	55.31	74.00	18.69	Peak
2594.000	32.50	8.05	34.58	49.16	55.13	74.00	18.87	Peak

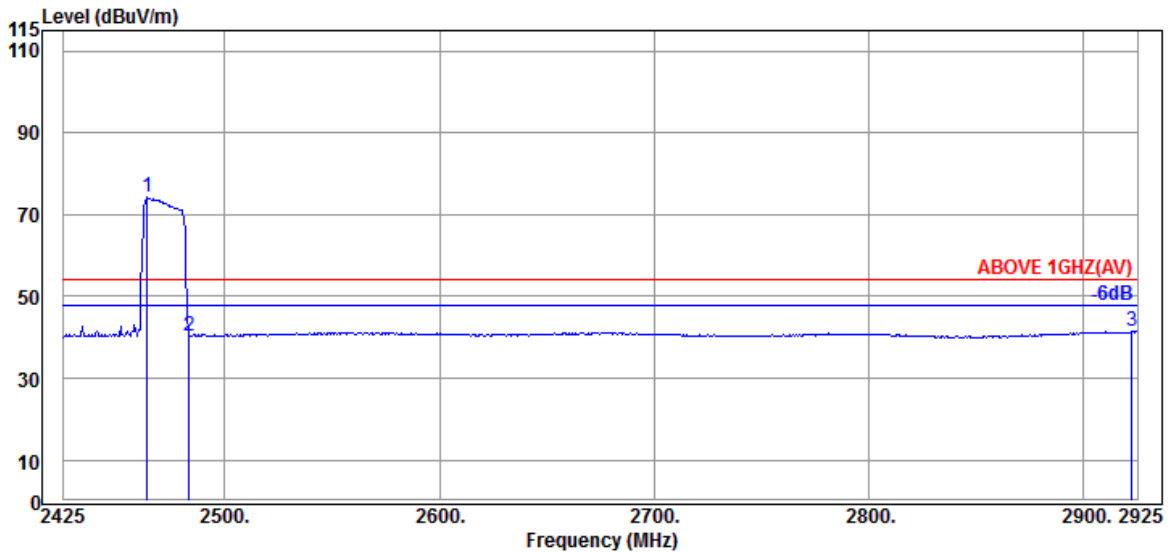


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	68.42	74.15	---	---	Average
2483.500	32.30	7.99	34.55	34.66	40.40	54.00	13.60	Average
2922.500	32.90	8.19	34.64	34.98	41.43	54.00	12.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

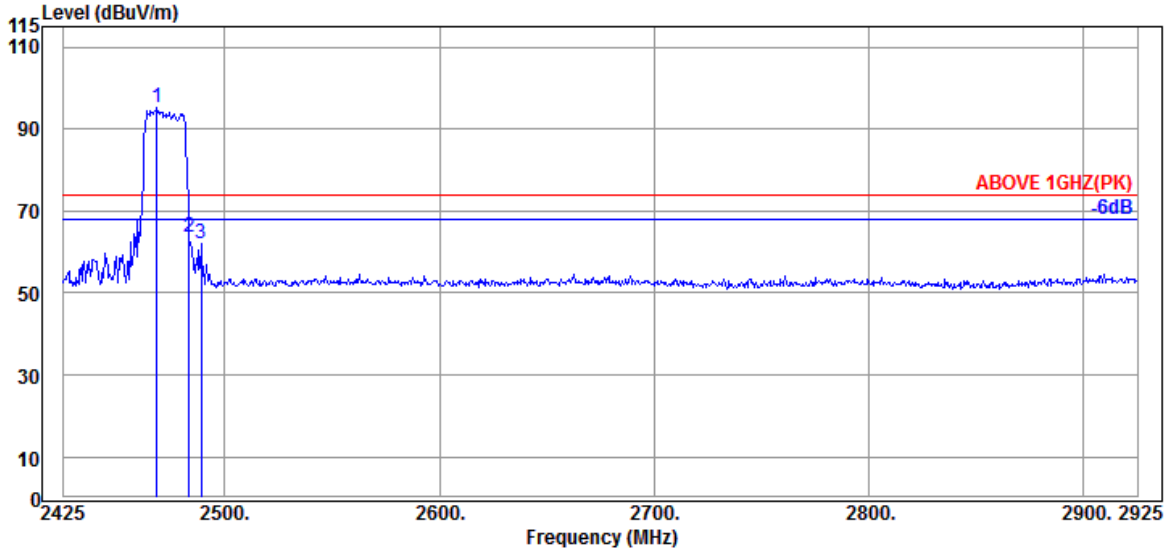

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	89.54	95.27	---	---	Peak
2483.500	32.30	7.99	34.55	57.74	63.48	74.00	10.52	Peak
2489.000	32.30	8.00	34.55	56.46	62.21	74.00	11.79	Peak

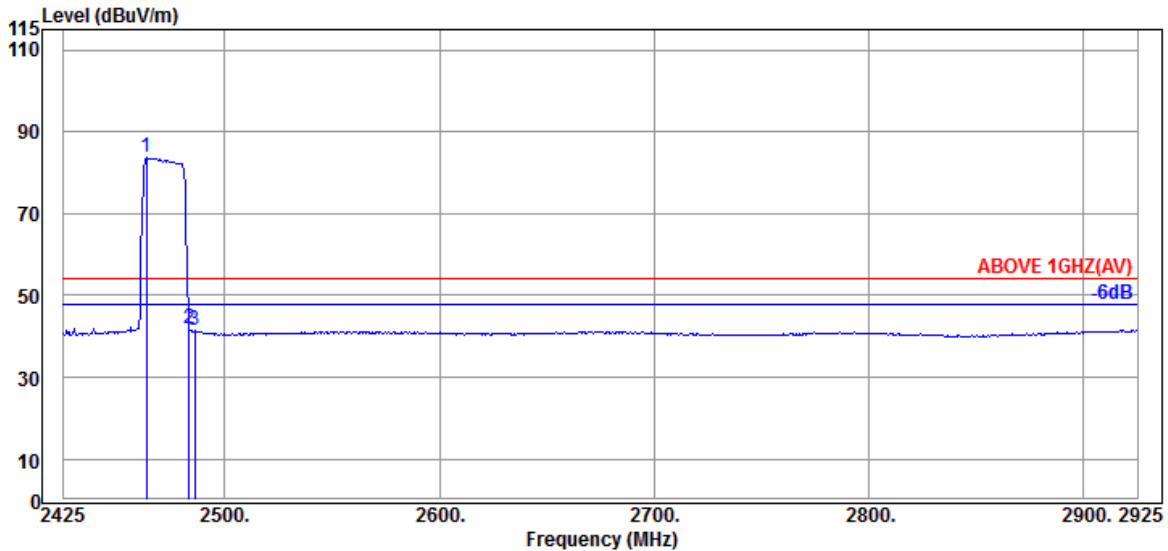


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	77.89	83.62	---	---	Average
2483.500	32.30	7.99	34.55	36.02	41.76	54.00	12.24	Average
2486.000	32.30	8.00	34.55	35.62	41.37	54.00	12.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

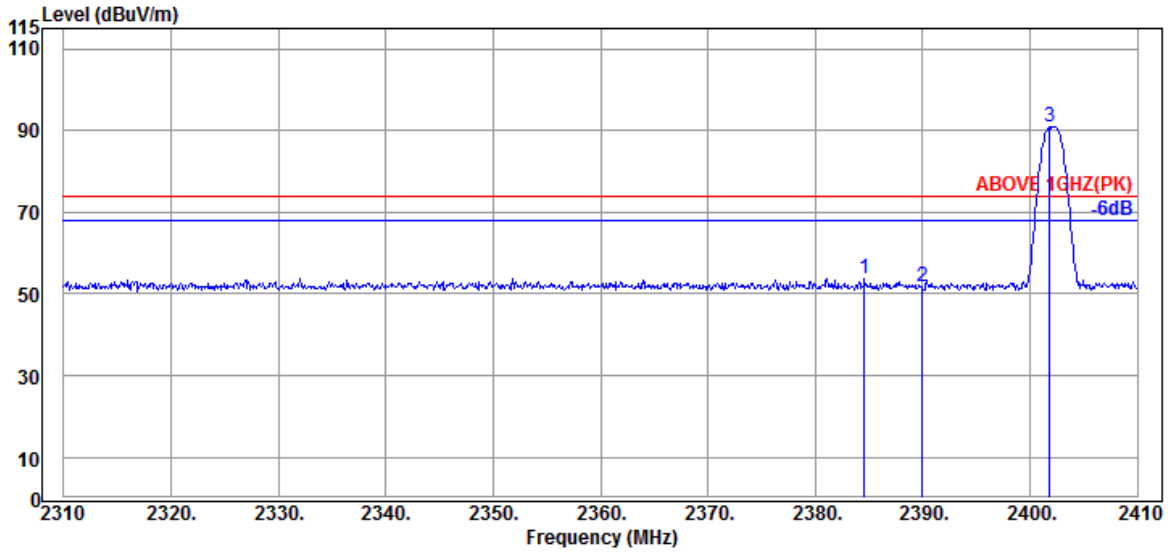

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.600	31.89	7.95	34.53	48.37	53.68	74.00	20.32	Peak
2390.000	31.89	7.95	34.54	46.28	51.58	74.00	22.42	Peak
@ 2401.800	31.80	7.95	34.54	85.59	90.80	---	---	Peak

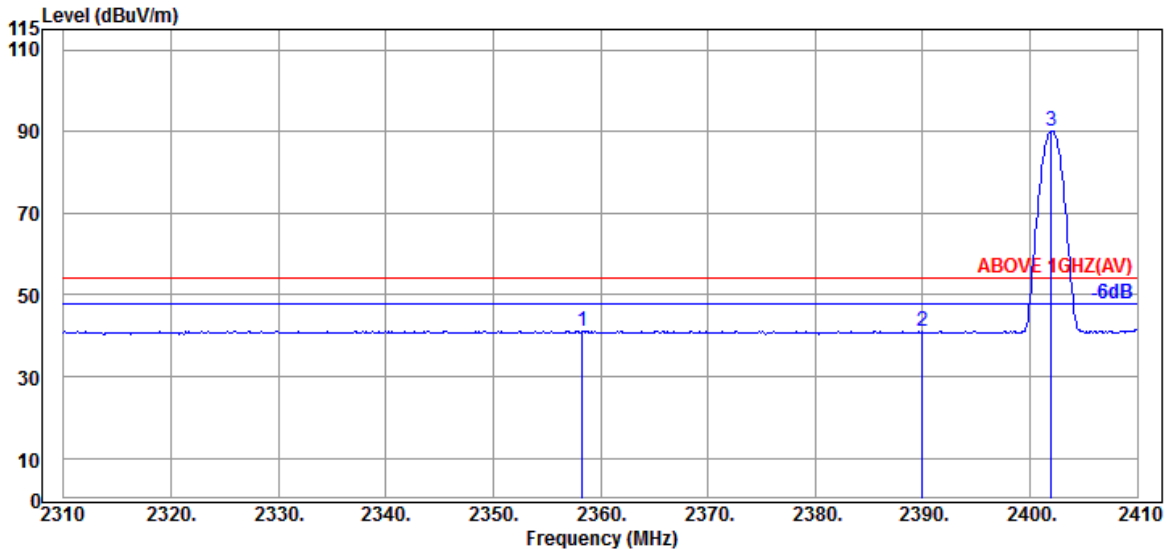


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.300	32.06	7.93	34.53	35.77	41.23	54.00	12.77	Average
2390.000	31.89	7.95	34.54	35.66	40.96	54.00	13.04	Average
@ 2402.000	31.80	7.95	34.54	85.03	90.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

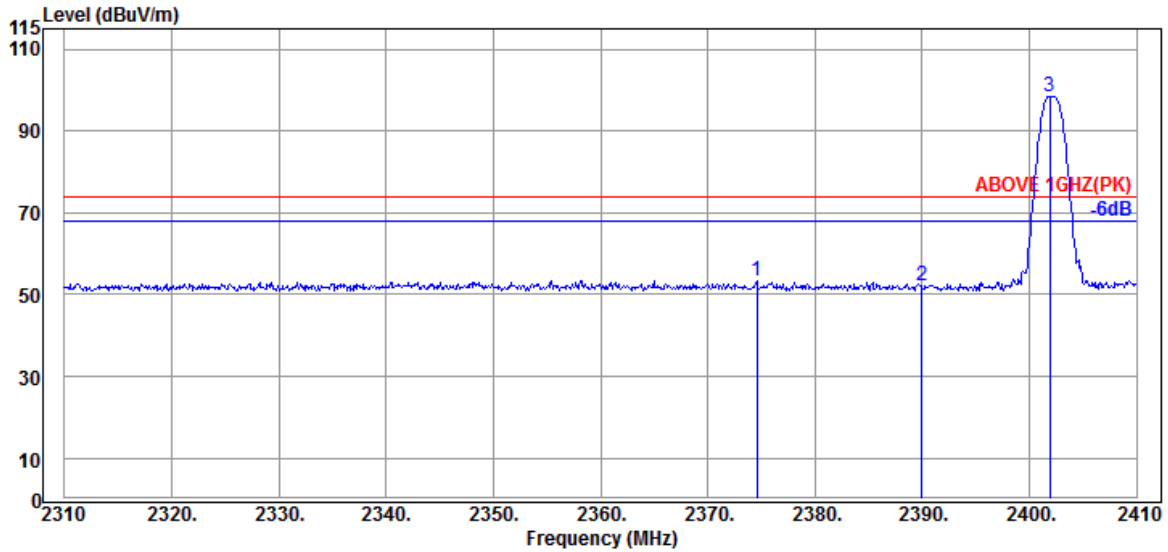

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.600	31.97	7.94	34.53	47.99	53.37	74.00	20.63	Peak
2390.000	31.89	7.95	34.54	46.98	52.28	74.00	21.72	Peak
@ 2401.900	31.80	7.95	34.54	93.17	98.38	---	---	Peak

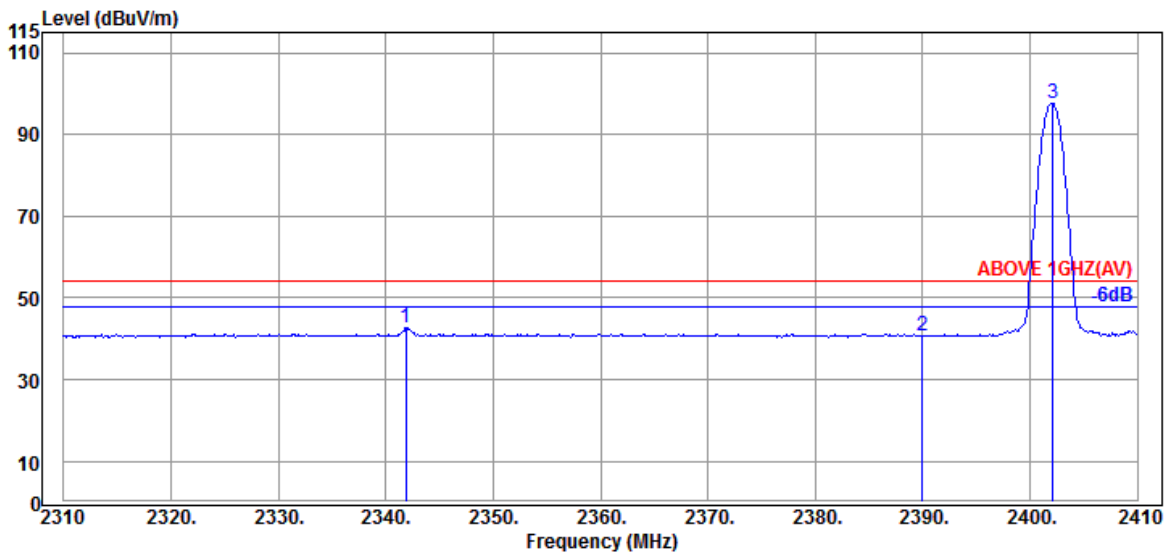


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	32.05	7.92	34.53	37.30	42.74	54.00	11.26	Average
2390.000	31.89	7.95	34.54	35.43	40.73	54.00	13.27	Average
@ 2402.100	31.80	7.95	34.54	92.46	97.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

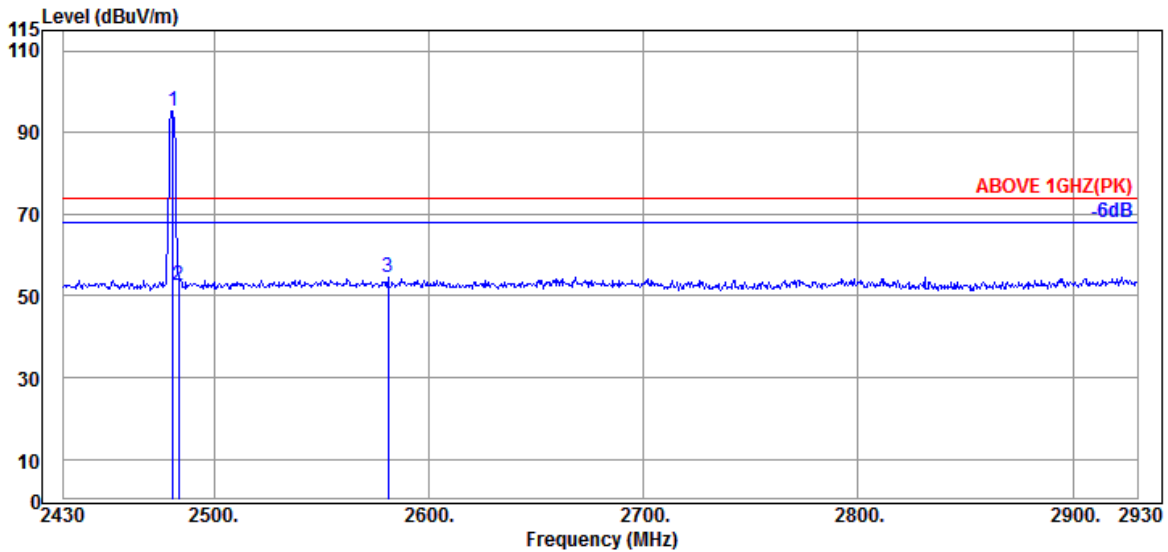

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	89.45	95.19	---	---	Peak
2483.500	32.30	7.99	34.55	46.77	52.51	74.00	21.49	Peak
2581.000	32.50	8.04	34.58	48.64	54.60	74.00	19.40	Peak

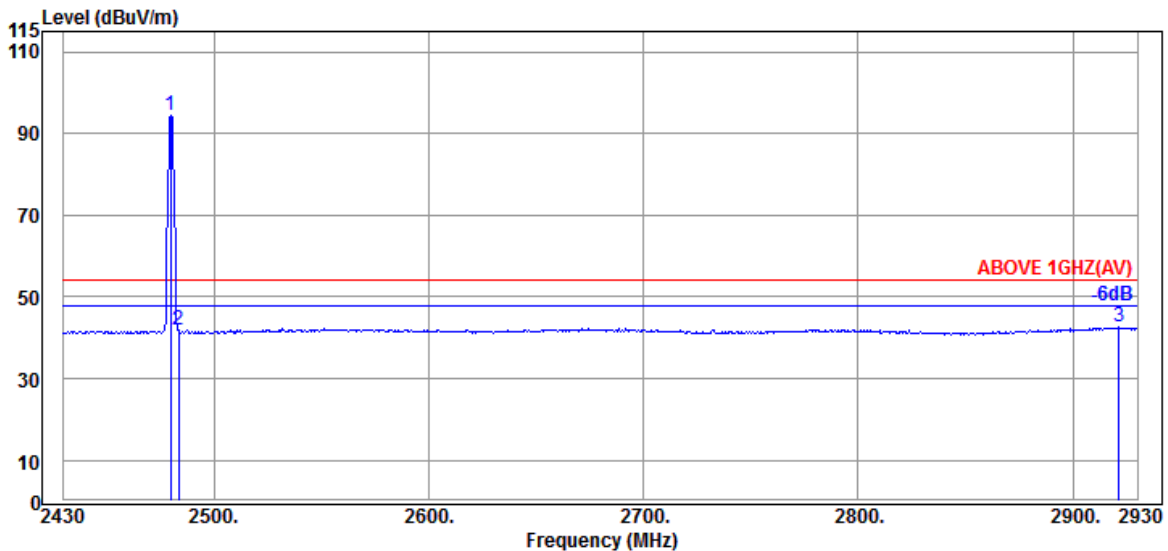


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	88.80	94.54	---	---	Average
2483.500	32.30	7.99	34.55	36.07	41.81	54.00	12.19	Average
2921.500	32.90	8.19	34.64	36.10	42.55	54.00	11.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

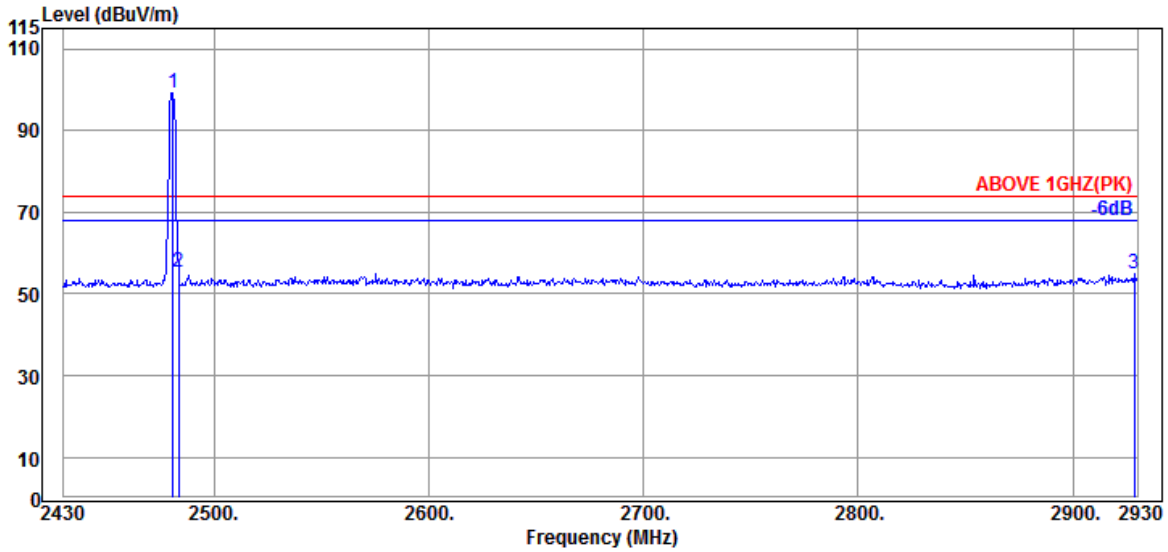

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	93.50	99.24	---	---	Peak
2483.500	32.30	7.99	34.55	49.45	55.19	74.00	18.81	Peak
2928.500	32.97	8.19	34.65	48.54	55.05	74.00	18.95	Peak

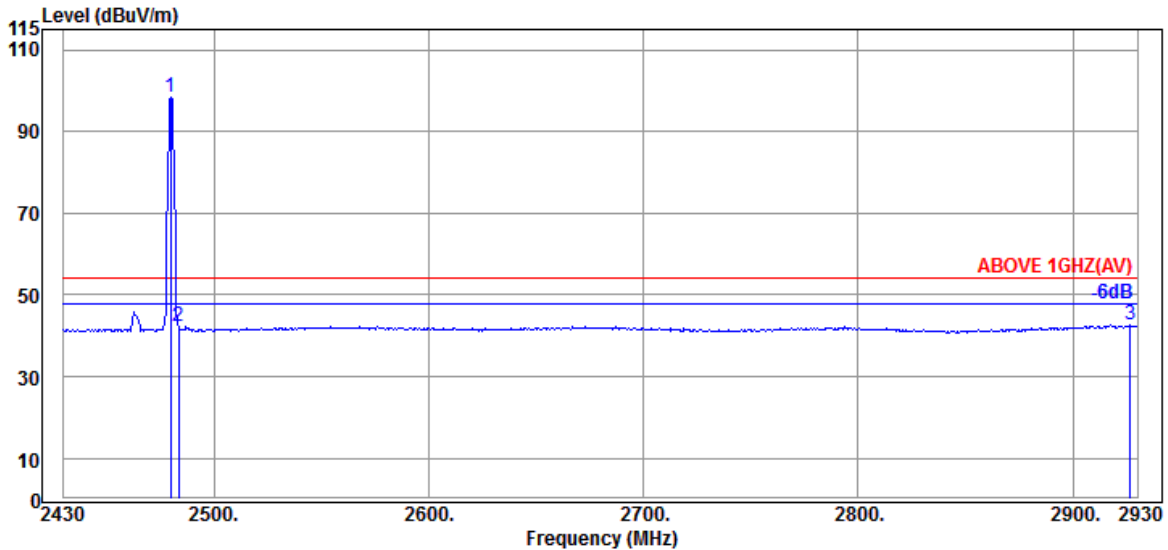


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	92.61	98.35	---	---	Average
2483.500	32.30	7.99	34.55	36.39	42.13	54.00	11.87	Average
2926.500	32.97	8.19	34.65	36.14	42.65	54.00	11.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

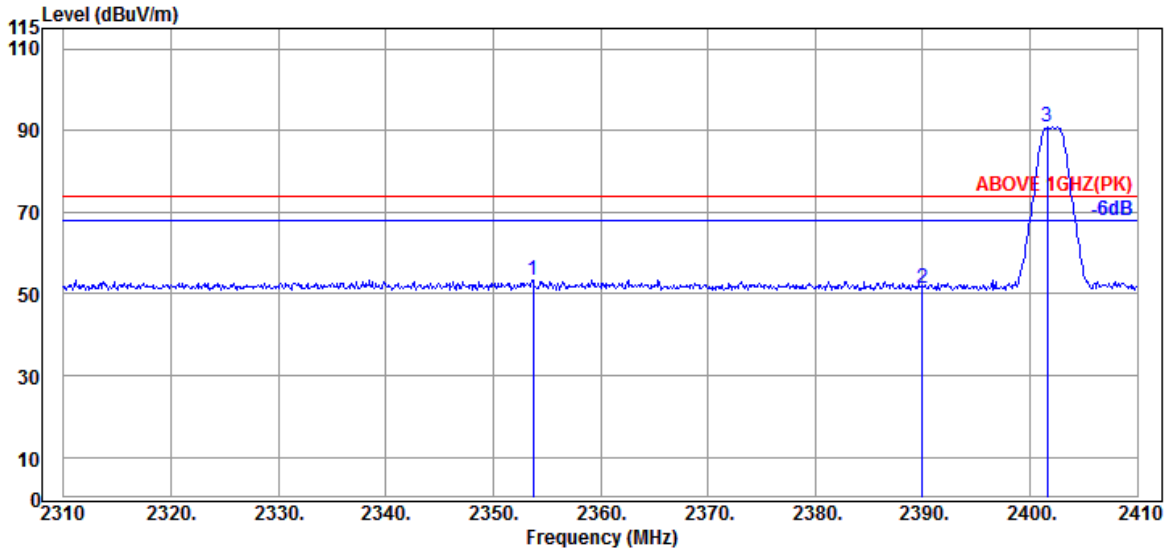

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2353.700	32.10	7.93	34.53	47.86	53.36	74.00	20.64	Peak
2390.000	31.89	7.95	34.54	45.88	51.18	74.00	22.82	Peak
@ 2401.600	31.80	7.95	34.54	85.55	90.76	---	---	Peak

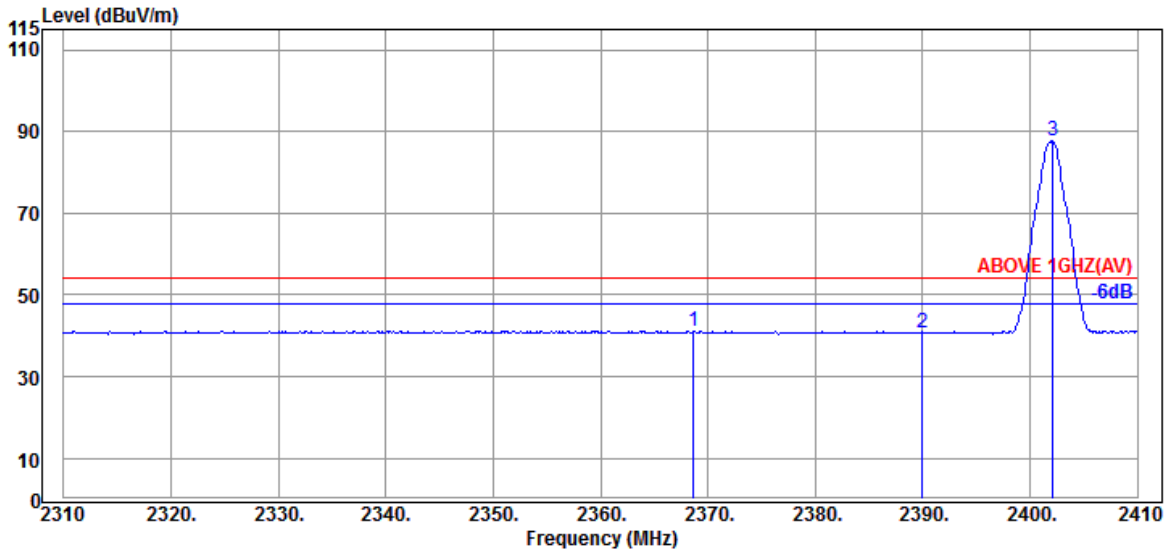


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2368.700	32.01	7.94	34.53	35.85	41.27	54.00	12.73	Average
2390.000	31.89	7.95	34.54	35.37	40.67	54.00	13.33	Average
@ 2402.100	31.80	7.95	34.54	82.65	87.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

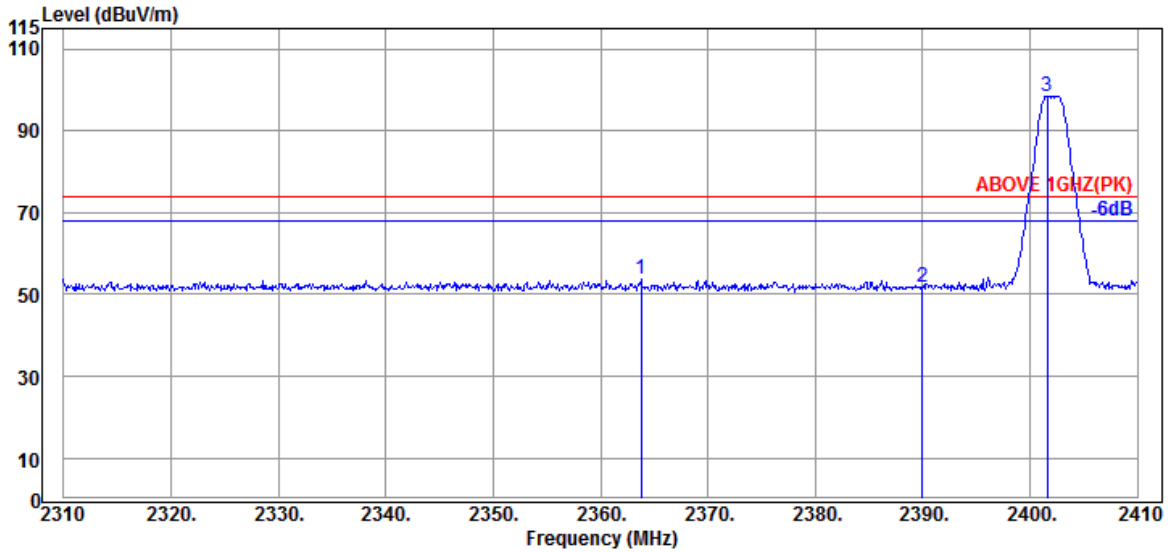

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.800	32.01	7.94	34.53	48.34	53.76	74.00	20.24	Peak
2390.000	31.89	7.95	34.54	46.47	51.77	74.00	22.23	Peak
@ 2401.600	31.80	7.95	34.54	93.30	98.51	---	---	Peak

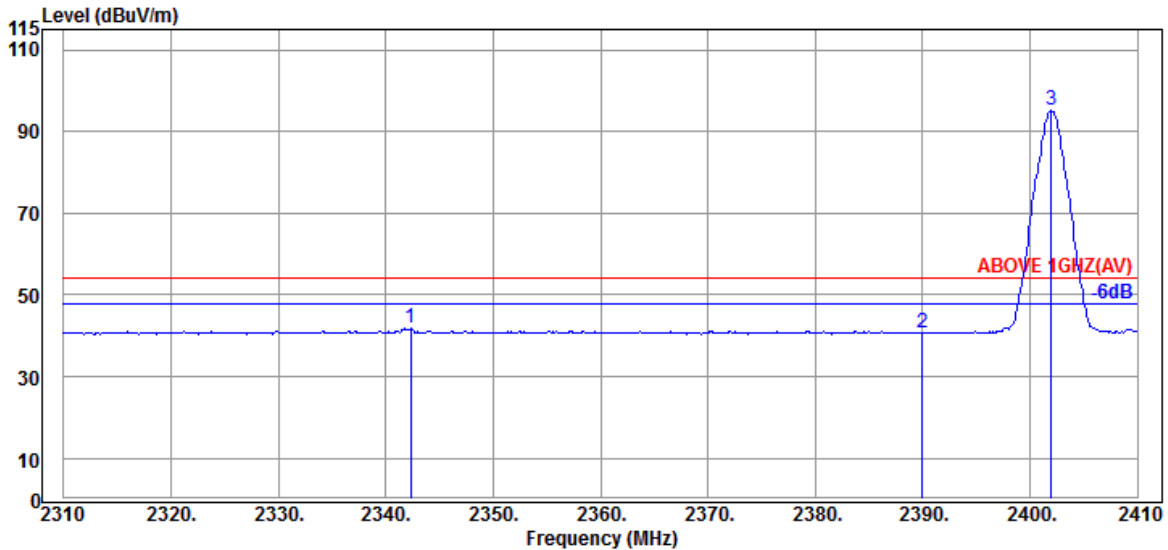


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.300	32.05	7.92	34.53	36.47	41.91	54.00	12.09	Average
2390.000	31.89	7.95	34.54	35.49	40.79	54.00	13.21	Average
@ 2402.000	31.80	7.95	34.54	90.04	95.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

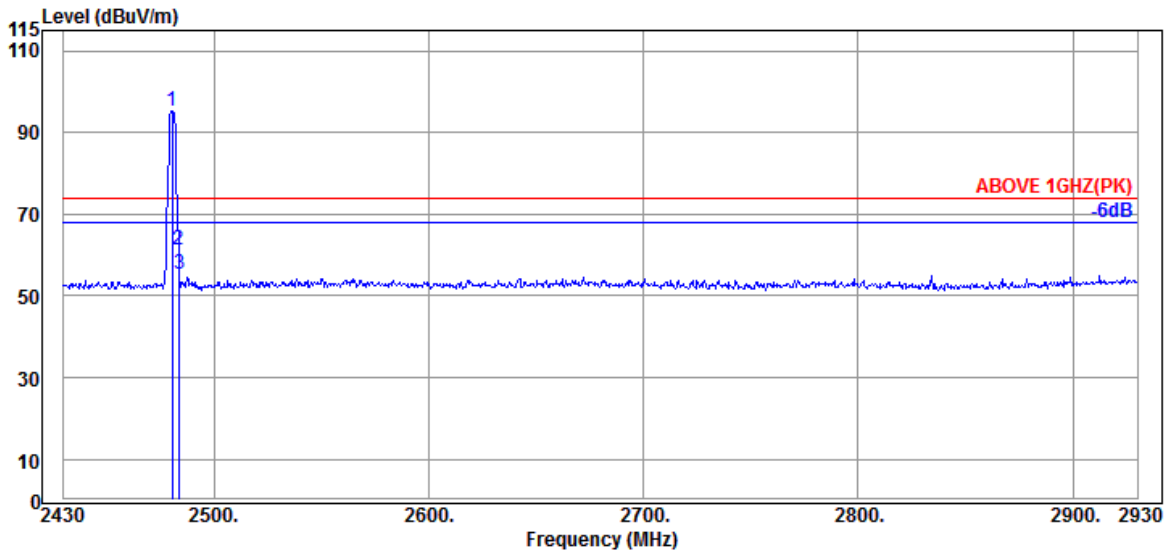

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	89.57	95.31	---	---	Peak
2483.500	32.30	7.99	34.55	55.62	61.36	74.00	12.64	Peak
2484.000	32.30	7.99	34.55	49.56	55.30	74.00	18.70	Peak

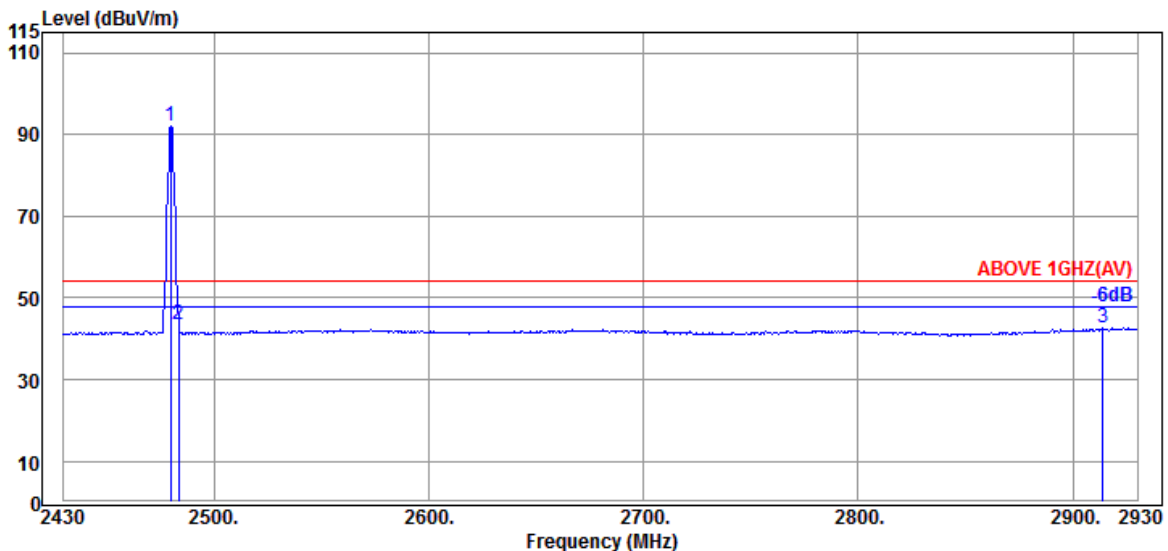


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	86.49	92.23	---	---	Average
2483.500	32.30	7.99	34.55	37.70	43.44	54.00	10.56	Average
2914.000	32.83	8.18	34.64	36.26	42.63	54.00	11.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

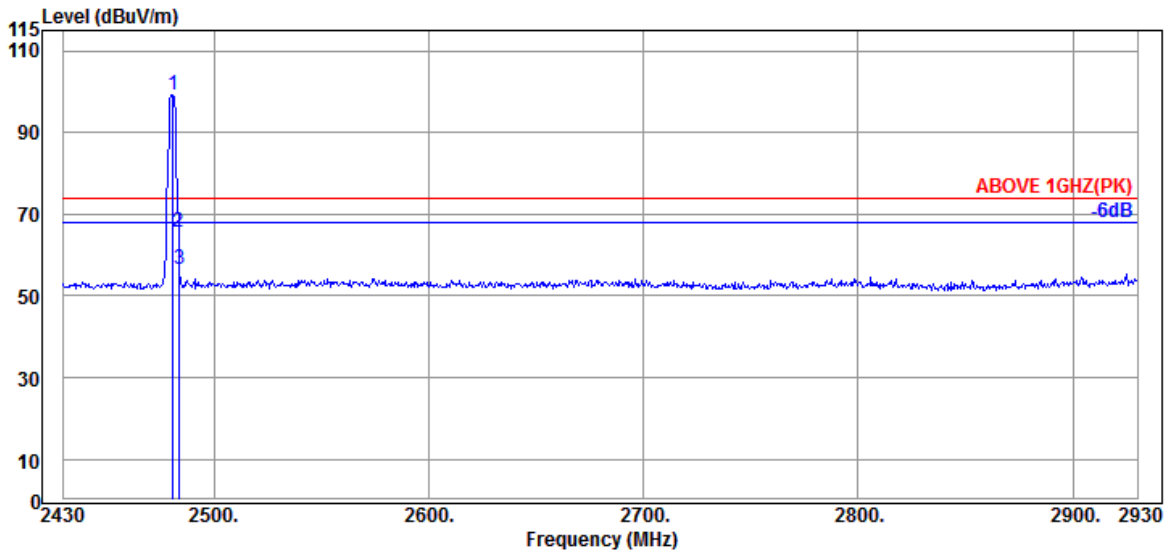

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	93.63	99.37	---	---	Peak
2483.500	32.30	7.99	34.55	59.90	65.64	74.00	8.36	Peak
2484.000	32.30	7.99	34.55	50.88	56.62	74.00	17.38	Peak

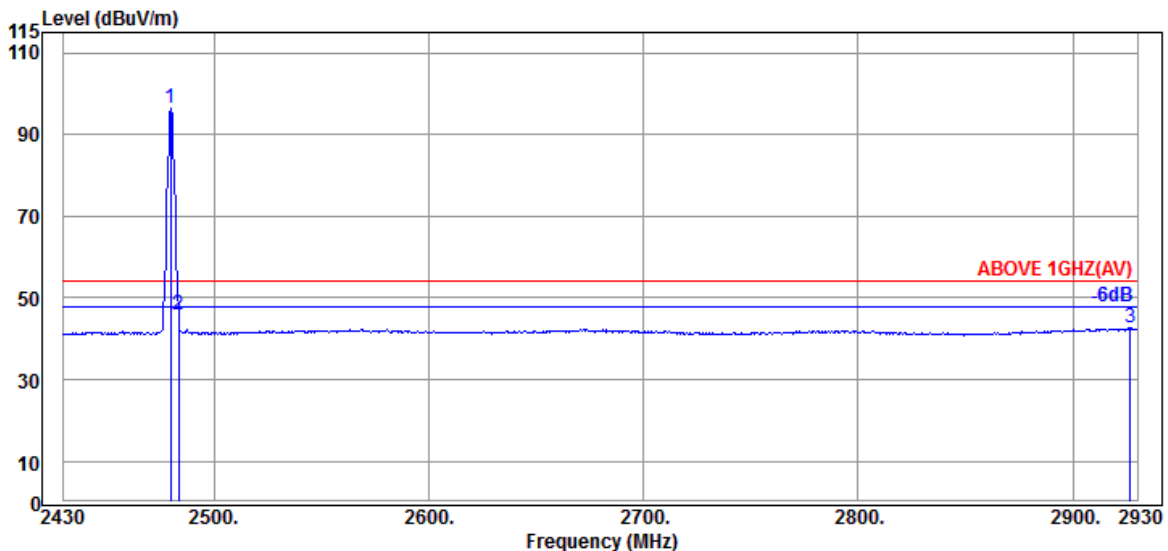

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	90.60	96.34	---	---	Average
2483.500	32.30	7.99	34.55	39.99	45.73	54.00	8.27	Average
2926.500	32.97	8.19	34.65	36.02	42.53	54.00	11.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.10	41.09	54.00	12.91	Peak
7326.000	35.60	12.29	34.71	34.57	47.75	54.00	6.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	34.34	44.33	54.00	9.67	Peak
7326.000	35.60	12.29	34.71	31.94	45.12	54.00	8.88	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.98	41.97	54.00	12.03	Peak
7326.000	35.60	12.29	34.71	32.56	45.74	54.00	8.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.61	42.60	54.00	11.40	Peak
7326.000	35.60	12.29	34.71	32.96	46.14	54.00	7.86	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.18	42.17	54.00	11.83	Peak
7326.000	35.60	12.29	34.71	32.67	45.85	54.00	8.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.20	42.19	54.00	11.81	Peak
7326.000	35.60	12.29	34.71	32.54	45.72	54.00	8.28	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.54	42.53	54.00	11.47	Peak
7326.000	35.60	12.29	34.71	34.70	47.88	54.00	6.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.67	41.66	54.00	12.34	Peak
7326.000	35.60	12.29	34.71	32.98	46.16	54.00	7.84	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	33.16	43.15	54.00	10.85	Peak
7326.000	35.60	12.29	34.71	33.79	46.97	54.00	7.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	33.40	43.39	54.00	10.61	Peak
7326.000	35.60	12.29	34.71	32.82	46.00	54.00	8.00	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.56	41.55	54.00	12.45	Peak
7326.000	35.60	12.29	34.71	32.59	45.77	54.00	8.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.30	42.29	54.00	11.71	Peak
7326.000	35.60	12.29	34.71	32.08	45.26	54.00	8.74	Peak

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.15	41.80	54.00	12.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.35	42.00	54.00	12.00	Peak

Mode	BLE (1M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	30.85	40.81	54.00	13.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	30.86	40.82	54.00	13.18	Peak

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	30.59	40.61	54.00	13.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	30.54	40.56	54.00	13.44	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.