


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands.....	163
A.3 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	189
A.4.1 Average Output Power	189
A.4.2 Measurement Plots	194
A.5 POWER SPECTRAL DENSITY	202
A.5.1 Power Spectral Density Result	202
A.5.2 Measurement Plots	206
A.6 FREQUENCY STABILITY	225
A.6.1 Frequency stability Result	225

A.1 CONDUCTED EMISSION

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

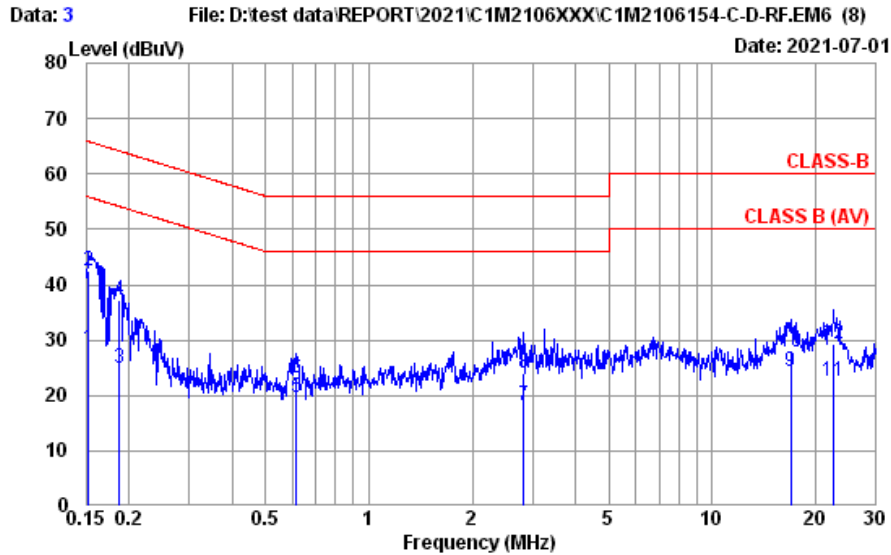

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	8.23	28.52	55.87	27.35	Average
2	0.152	10.41	0.03	9.85	22.20	42.49	65.87	23.38	QP
3	0.187	10.39	0.03	9.85	4.61	24.88	54.15	29.27	Average
4	0.187	10.39	0.03	9.85	17.01	37.28	64.15	26.87	QP
5	0.614	10.37	0.03	9.85	-0.56	19.69	46.00	26.31	Average
6	0.614	10.37	0.03	9.85	2.91	23.16	56.00	32.84	QP
7	2.824	10.43	0.08	9.86	-2.18	18.19	46.00	27.81	Average
8	2.824	10.43	0.08	9.86	3.54	23.91	56.00	32.09	QP
9	16.928	11.00	0.18	9.92	3.27	24.37	50.00	25.63	Average
10	16.928	11.00	0.18	9.92	6.86	27.96	60.00	32.04	QP
11	22.535	11.18	0.21	9.96	1.23	22.58	50.00	27.42	Average
12	22.535	11.18	0.21	9.96	7.97	29.32	60.00	30.68	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

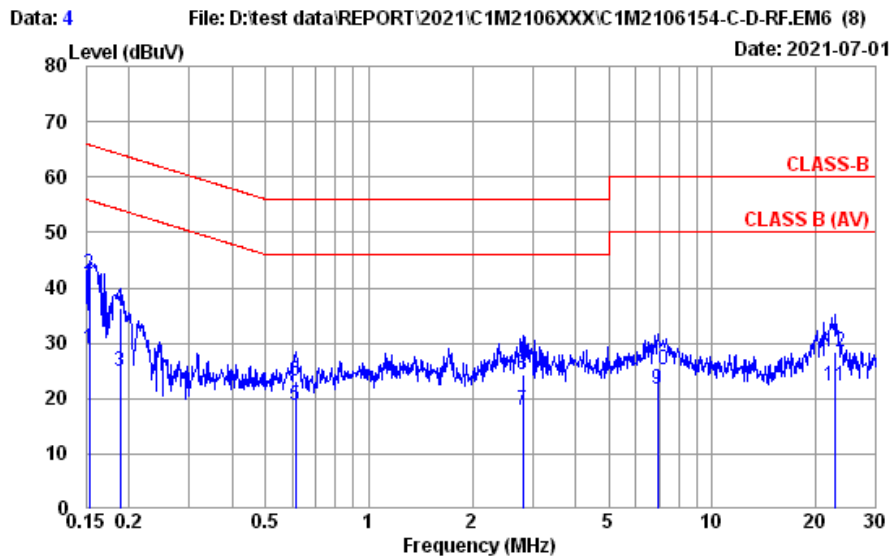


Site No. : No.8 Shielded Room Data No. : 4
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 26°C / 53% Engineer : Roy Hung
 EUT Model : 16295P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.40	0.03	9.85	8.79	29.07	55.82	26.75	Average
2	0.153	10.40	0.03	9.85	22.31	42.59	65.82	23.23	QP
3	0.188	10.39	0.03	9.85	4.52	24.79	54.11	29.32	Average
4	0.188	10.39	0.03	9.85	16.03	36.30	64.11	27.81	QP
5	0.611	10.37	0.03	9.85	-1.58	18.67	46.00	27.33	Average
6	0.611	10.37	0.03	9.85	2.84	23.09	56.00	32.91	QP
7	2.809	10.41	0.07	9.86	-2.32	18.02	46.00	27.98	Average
8	2.809	10.41	0.07	9.86	3.96	24.30	56.00	31.70	QP
9	6.951	10.50	0.12	9.87	1.27	21.76	50.00	28.24	Average
10	6.951	10.50	0.12	9.87	4.85	25.34	60.00	34.66	QP
11	22.896	10.80	0.21	9.96	1.21	22.18	50.00	27.82	Average
12	22.896	10.80	0.21	9.96	7.54	28.51	60.00	31.49	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

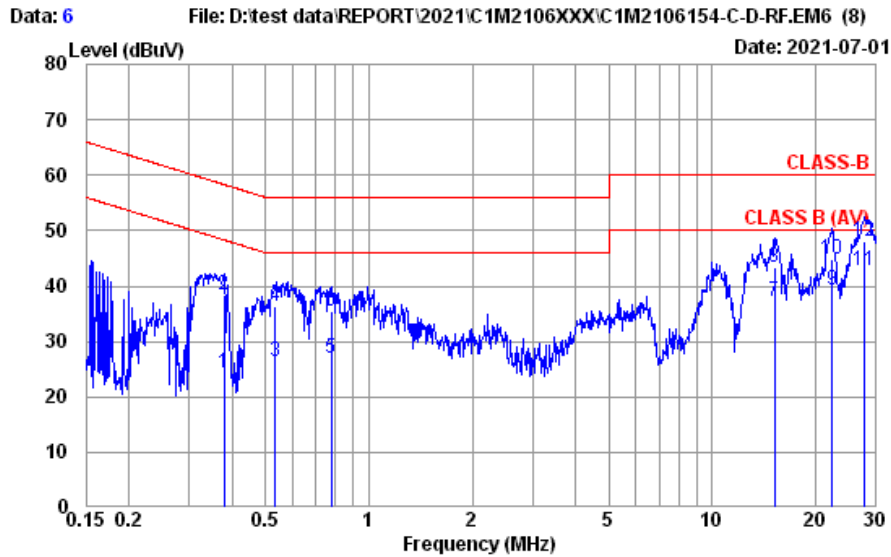


Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.379	10.37	0.03	9.85	4.14	24.39	48.30	23.91	Average
2	0.379	10.37	0.03	9.85	18.15	38.40	58.30	19.90	QP
3	0.535	10.37	0.03	9.85	6.22	26.47	46.00	19.53	Average
4	0.535	10.37	0.03	9.85	16.08	36.33	56.00	19.67	QP
5	0.775	10.38	0.04	9.85	6.62	26.89	46.00	19.11	Average
6	0.775	10.38	0.04	9.85	15.21	35.48	56.00	20.52	QP
7	15.146	10.93	0.17	9.91	16.23	37.24	50.00	12.76	Average
8	15.146	10.93	0.17	9.91	22.45	43.46	60.00	16.54	QP
9	22.298	11.17	0.21	9.95	18.00	39.33	50.00	10.67	Average
10	22.298	11.17	0.21	9.95	23.41	44.74	60.00	15.26	QP
11	27.855	11.33	0.23	9.99	21.16	42.71	50.00	7.29	Average
12	27.855	11.33	0.23	9.99	26.46	48.01	60.00	11.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/07/02	Temp./Hum.	26°C/53%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

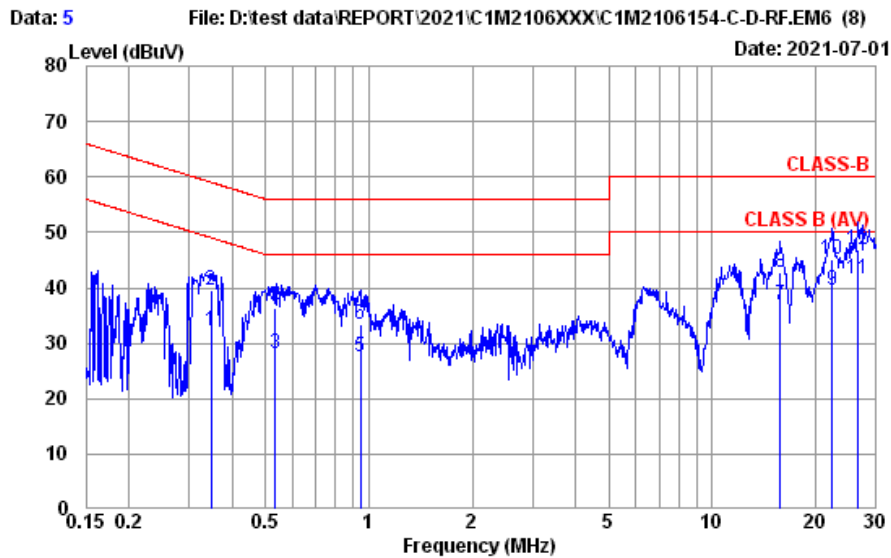

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 26°C / 53%	Engineer	: Roy Hung
EUT Model	: 16Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.346	10.37	0.03	9.85	12.02	32.27	49.05	16.78	Average
2	0.346	10.37	0.03	9.85	19.35	39.60	59.05	19.45	QP
3	0.535	10.37	0.03	9.85	7.80	28.05	46.00	17.95	Average
4	0.535	10.37	0.03	9.85	16.06	36.31	56.00	19.69	QP
5	0.943	10.38	0.04	9.85	7.32	27.59	46.00	18.41	Average
6	0.943	10.38	0.04	9.85	13.03	33.30	56.00	22.70	QP
7	15.801	10.70	0.18	9.92	16.26	37.06	50.00	12.94	Average
8	15.801	10.70	0.18	9.92	21.93	42.73	60.00	17.27	QP
9	22.298	10.80	0.21	9.95	18.75	39.71	50.00	10.29	Average
10	22.298	10.80	0.21	9.95	24.08	45.04	60.00	14.96	QP
11	26.558	10.84	0.23	9.98	20.68	41.73	50.00	8.27	Average
12	26.558	10.84	0.23	9.98	25.76	46.81	60.00	13.19	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/06/28 ~ 30	Temp./Hum.	23 ~ 28°C/54 ~ 57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
84.320	15.08	0.82	32.58	51.73	35.05	40.00	4.95	Peak
127.970	18.42	0.98	32.52	47.75	34.63	43.50	8.87	Peak
338.460	21.00	1.66	32.46	53.53	43.73	46.00	2.27	Peak
508.210	24.34	2.23	32.44	46.28	40.41	46.00	5.59	Peak
847.710	29.15	3.07	31.91	43.24	43.55	46.00	2.45	Peak
967.990	30.33	3.22	31.15	29.92	32.32	54.00	21.68	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	19.23	0.56	32.66	51.23	38.36	40.00	1.64	Peak
168.710	19.13	1.12	32.48	53.71	41.48	43.50	2.02	Peak
338.460	21.00	1.66	32.46	51.69	41.89	46.00	4.11	Peak
508.210	24.34	2.23	32.44	44.98	39.11	46.00	6.89	Peak
763.320	28.35	2.96	32.17	36.69	35.83	46.00	10.17	Peak
963.140	30.27	3.21	31.15	32.13	34.46	54.00	19.54	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

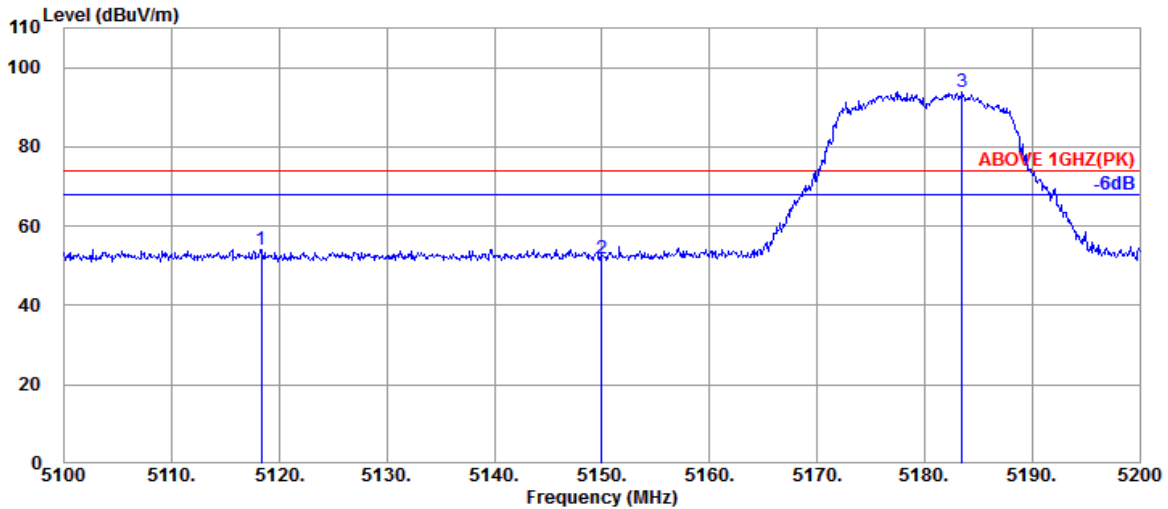

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.400	34.20	10.70	34.36	48.42	58.96	74.00	15.04	Peak
5150.000	34.20	10.70	34.35	46.33	56.88	74.00	17.12	Peak
@ 5178.500	34.20	10.72	34.34	93.01	103.59	---	---	Peak

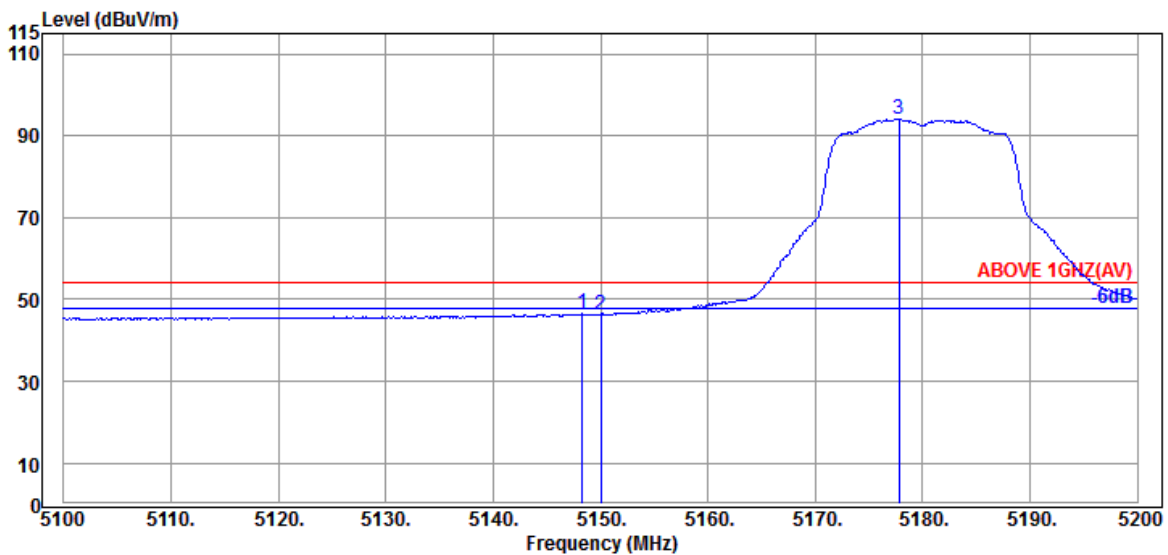


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.20	10.70	34.35	35.89	46.44	54.00	7.56	Average
5150.000	34.20	10.70	34.35	35.68	46.23	54.00	7.77	Average
@ 5177.800	34.20	10.72	34.34	83.50	94.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

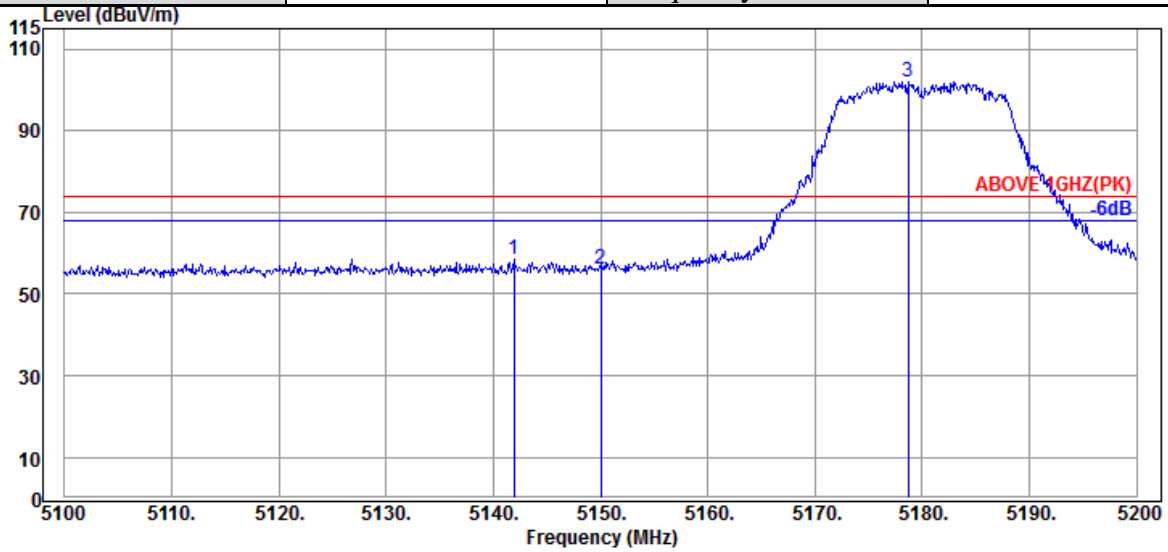

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	34.20	10.70	34.36	48.11	58.65	74.00	15.35	Peak
5150.000	34.20	10.70	34.35	45.67	56.22	74.00	17.78	Peak
@ 5178.700	34.20	10.72	34.34	91.50	102.08	---	---	Peak

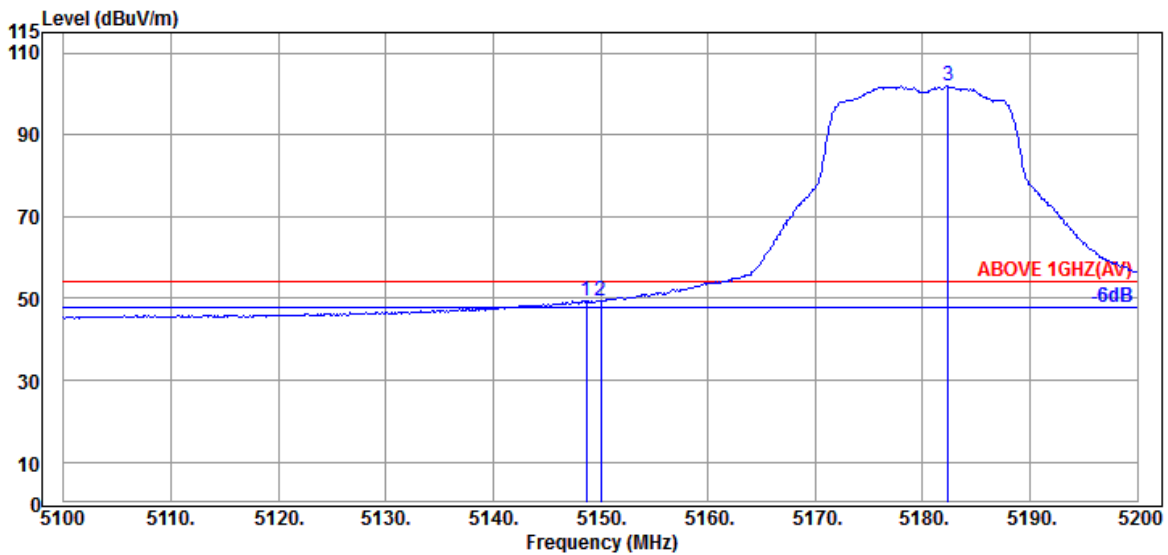


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	34.20	10.70	34.35	38.79	49.34	54.00	4.66	Average
5150.000	34.20	10.70	34.35	38.82	49.37	54.00	4.63	Average
@ 5182.400	34.20	10.72	34.34	91.32	101.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

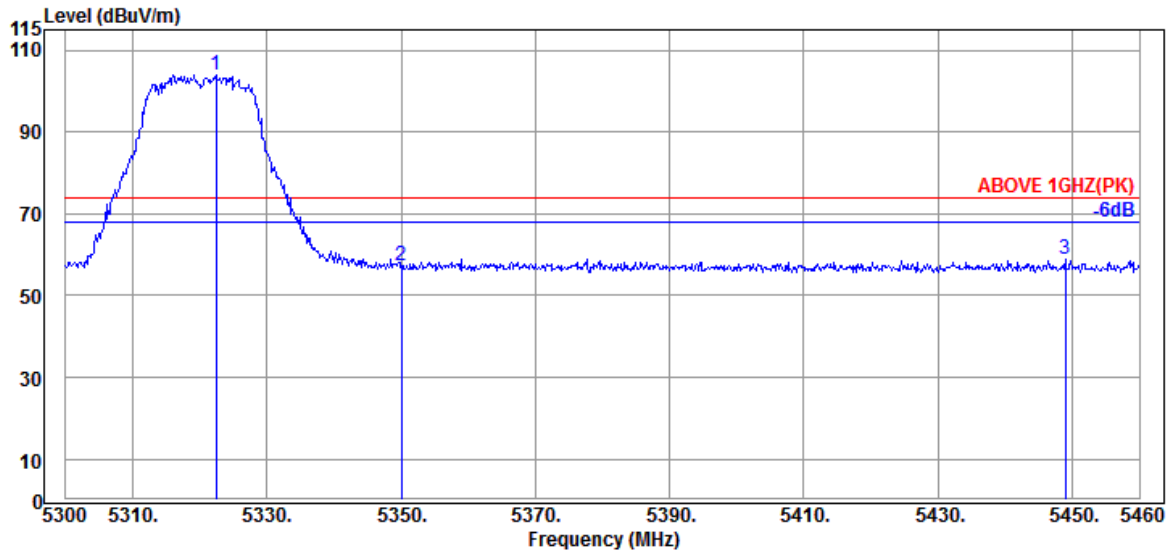

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5322.400	34.53	10.83	34.28	92.83	103.91	---	---	Peak
5350.080	34.60	10.83	34.27	46.13	57.29	74.00	16.71	Peak
5448.960	34.50	10.89	34.25	47.78	58.92	74.00	15.08	Peak

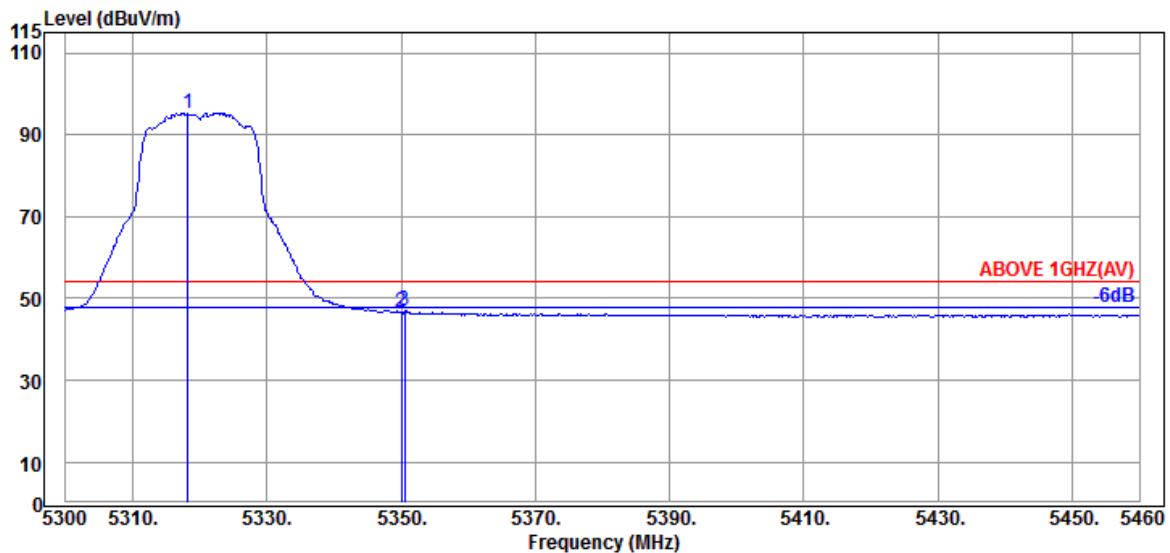


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.240	34.53	10.81	34.29	84.27	95.32	---	---	Average
5350.080	34.60	10.83	34.27	35.36	46.52	54.00	7.48	Average
5350.560	34.60	10.83	34.27	35.87	47.03	54.00	6.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

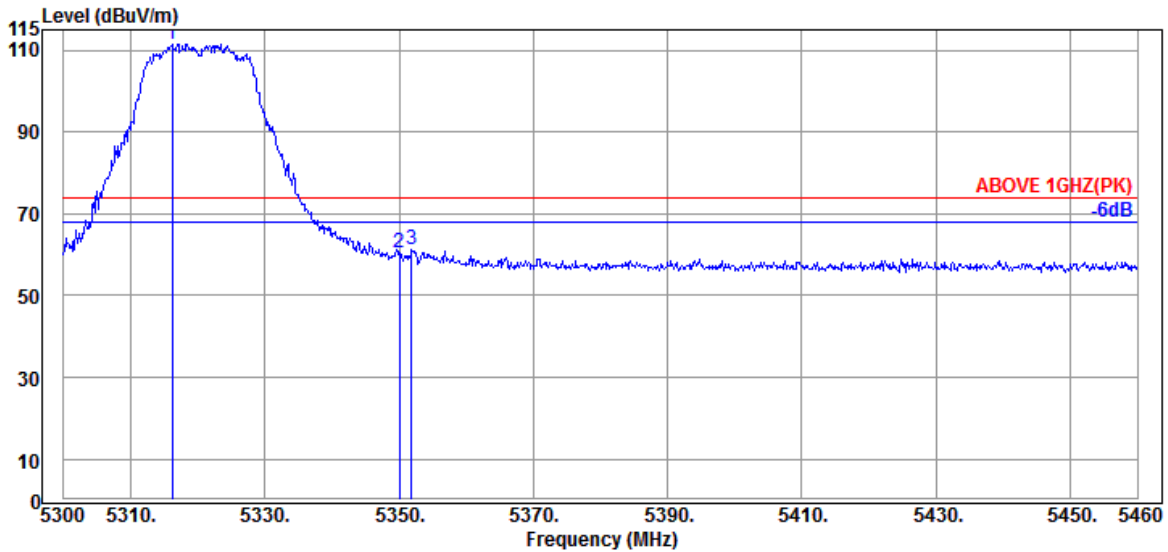

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.160	34.53	10.81	34.29	100.48	111.53	---	---	Peak
5350.080	34.60	10.83	34.27	49.41	60.57	74.00	13.43	Peak
5351.840	34.60	10.83	34.27	50.17	61.33	74.00	12.67	Peak

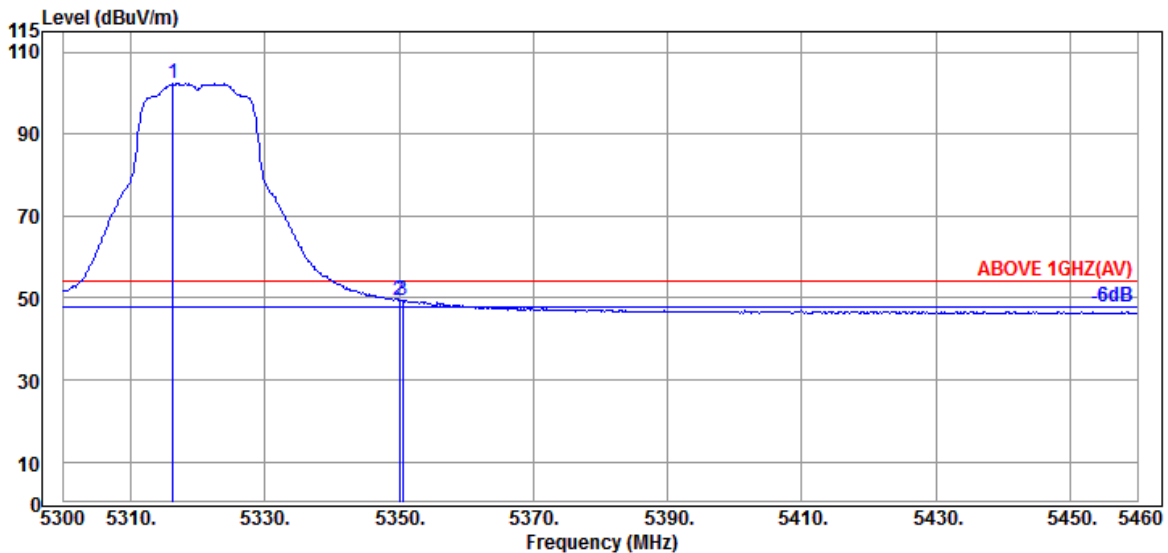


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.320	34.53	10.81	34.29	91.36	102.41	---	---	Average
5350.080	34.60	10.83	34.27	38.21	49.37	54.00	4.63	Average
5350.560	34.60	10.83	34.27	38.41	49.57	54.00	4.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

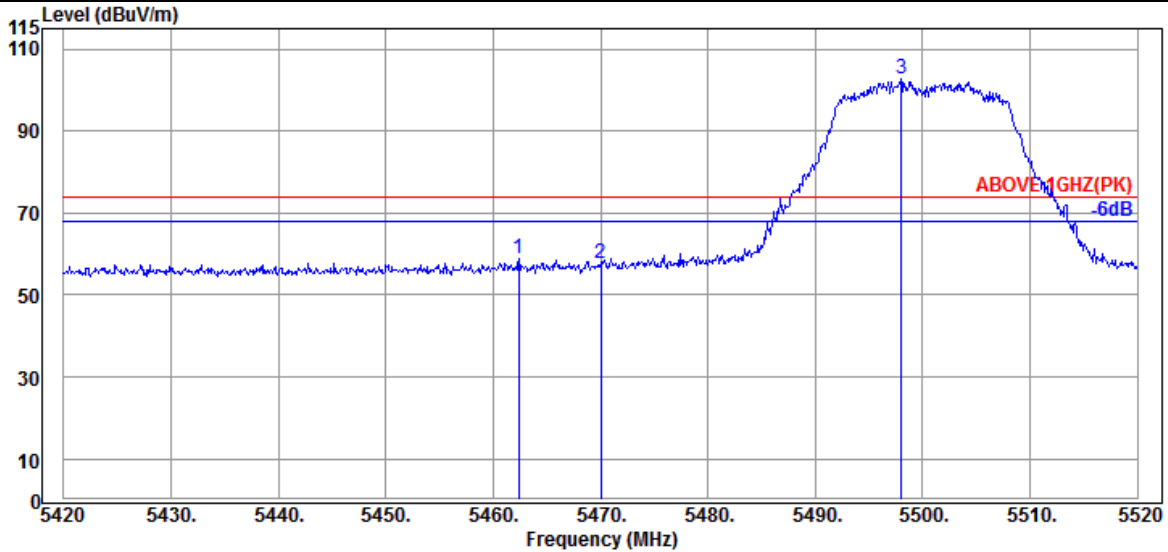

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.400	34.50	10.91	34.24	47.59	58.76	74.00	15.24	Peak
5470.000	34.47	10.91	34.24	46.75	57.89	74.00	16.11	Peak
@ 5498.000	34.40	10.93	34.23	91.51	102.61	---	---	Peak

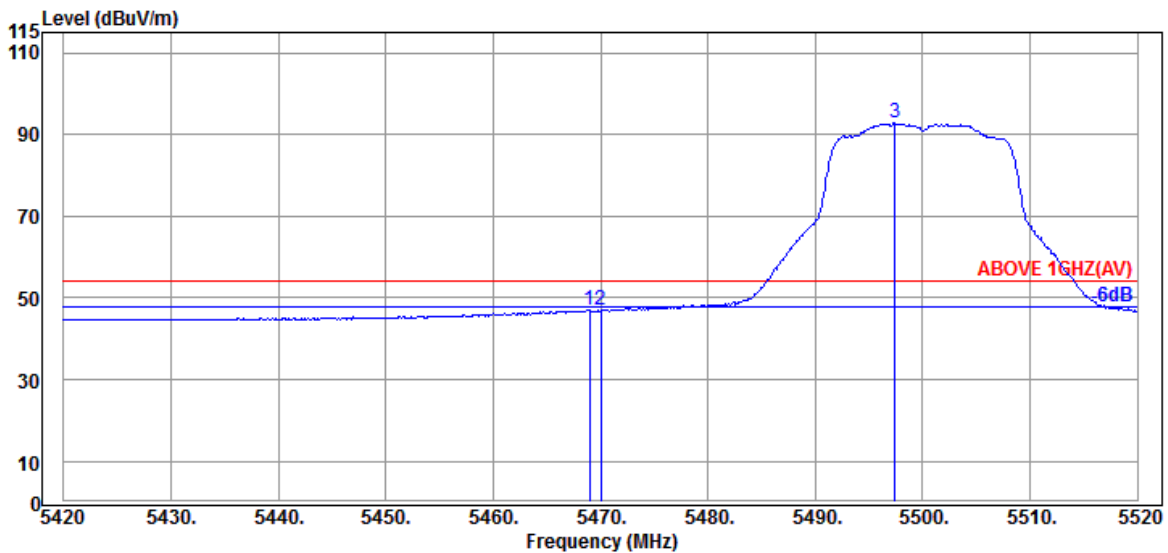


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	36.05	47.19	54.00	6.81	Average
5470.000	34.47	10.91	34.24	35.87	47.01	54.00	6.99	Average
@ 5497.400	34.40	10.93	34.23	81.63	92.73	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

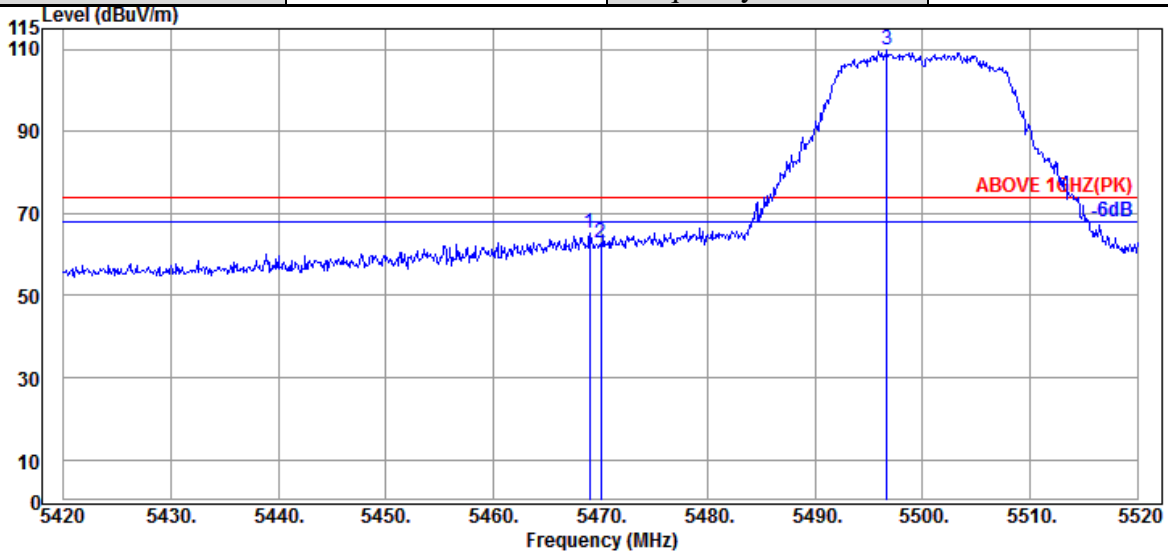

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	53.95	65.09	74.00	8.91	Peak
5470.000	34.47	10.91	34.24	51.83	62.97	74.00	11.03	Peak
@ 5496.700	34.40	10.93	34.23	98.59	109.69	---	---	Peak

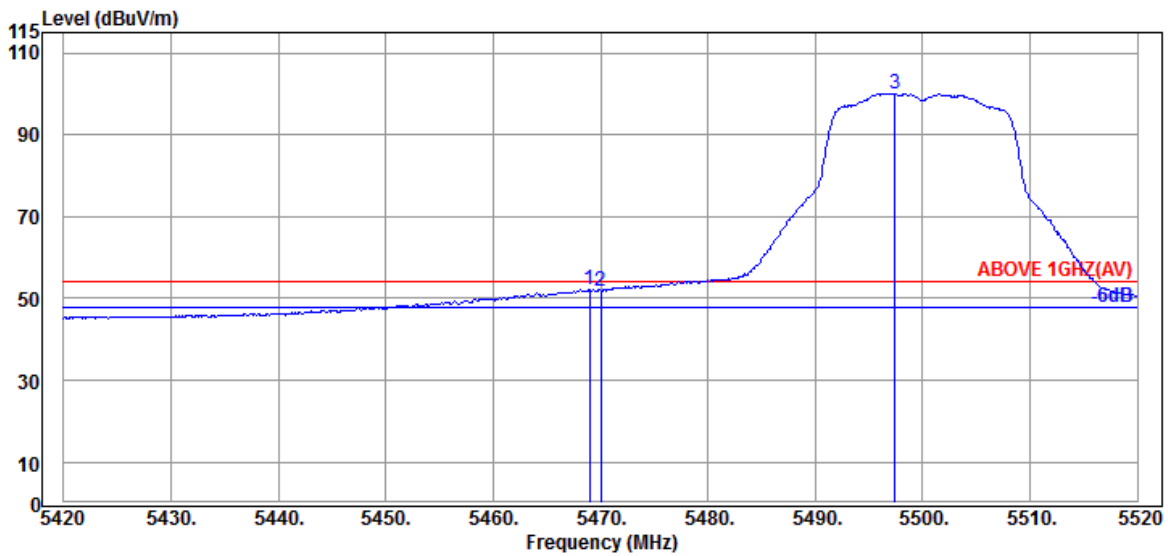


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	41.07	52.21	54.00	1.79	Average
5470.000	34.47	10.91	34.24	40.78	51.92	54.00	2.08	Average
@ 5497.400	34.40	10.93	34.23	89.07	100.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

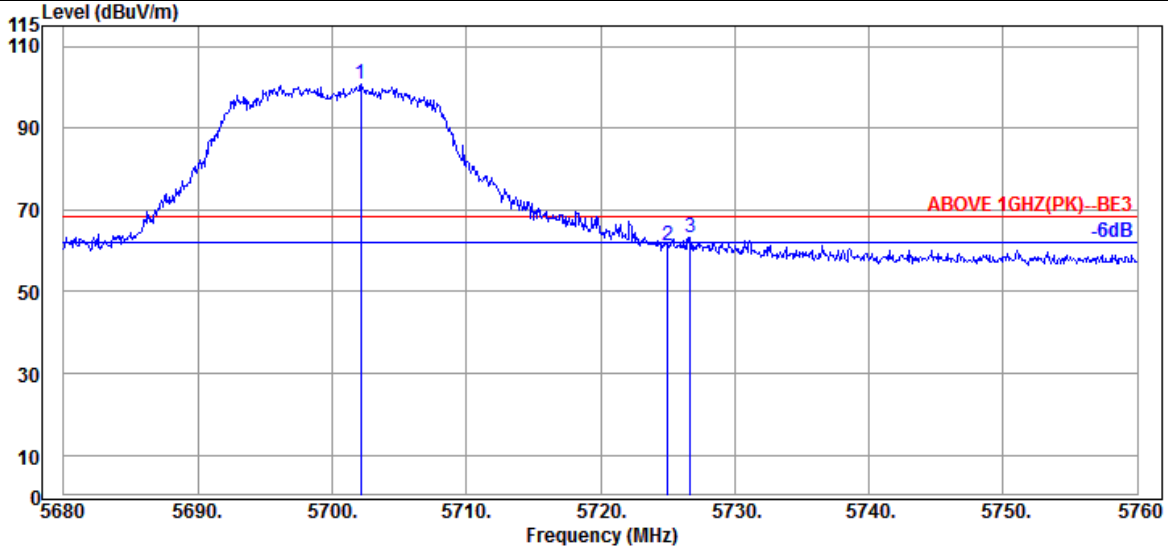

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.160	34.40	11.03	34.31	89.66	100.78	---	---	Peak
5725.040	34.67	11.05	34.32	49.91	61.31	68.20	6.89	Peak
5726.720	34.67	11.05	34.32	51.88	63.28	68.20	4.92	Peak

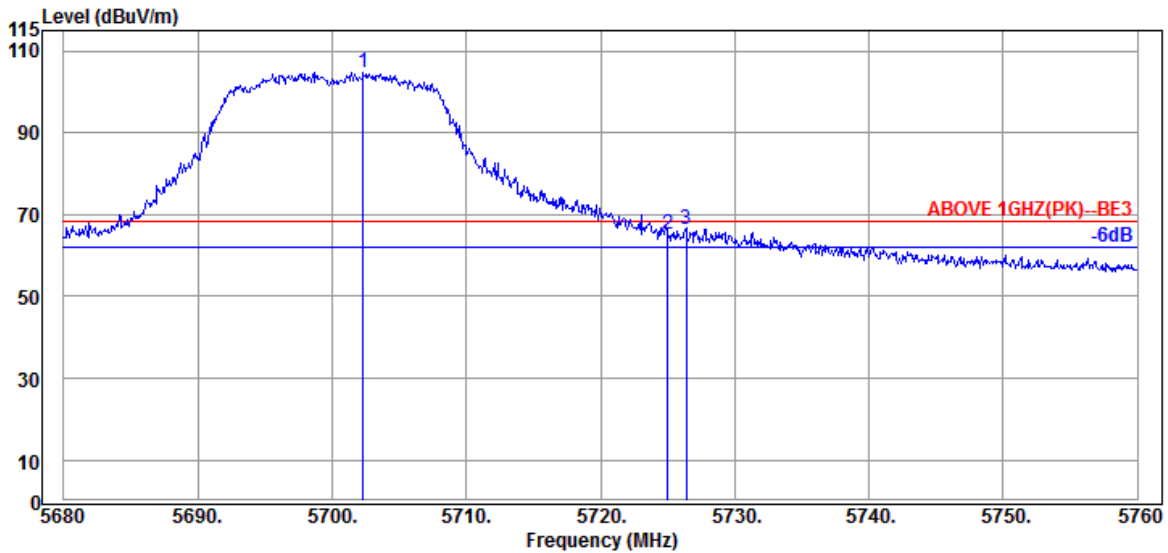


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.320	34.40	11.03	34.31	93.77	104.89	---	---	Peak
5725.040	34.67	11.05	34.32	53.77	65.17	68.20	3.03	Peak
5726.400	34.67	11.05	34.32	55.07	66.47	68.20	1.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

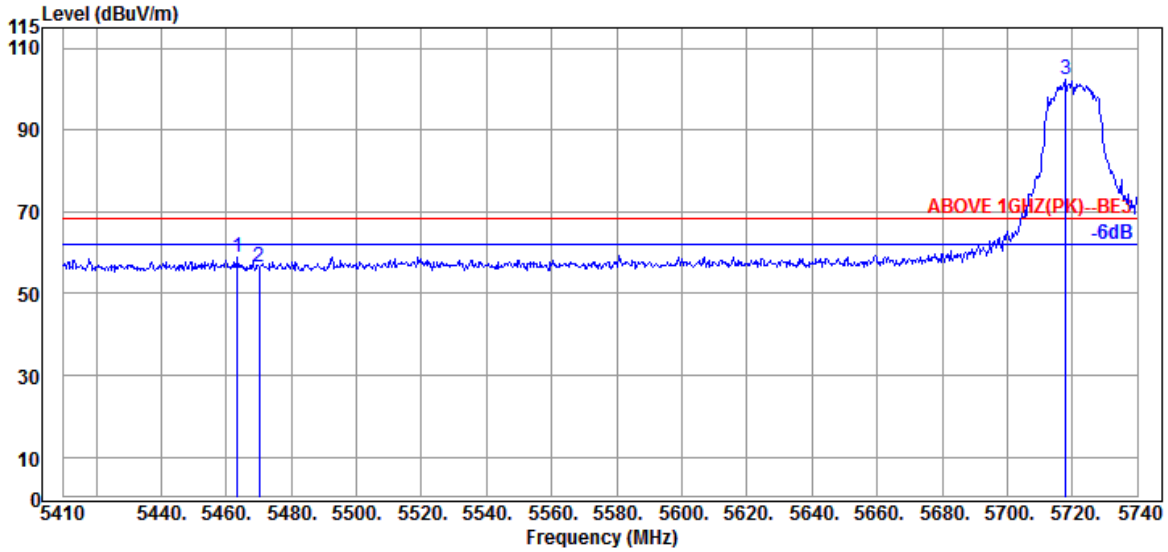

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.460	34.50	10.91	34.24	47.59	58.76	68.20	9.44	Peak
5470.060	34.47	10.91	34.24	45.43	56.57	68.20	11.63	Peak
@ 5717.890	34.53	11.05	34.32	90.96	102.22	---	---	Peak

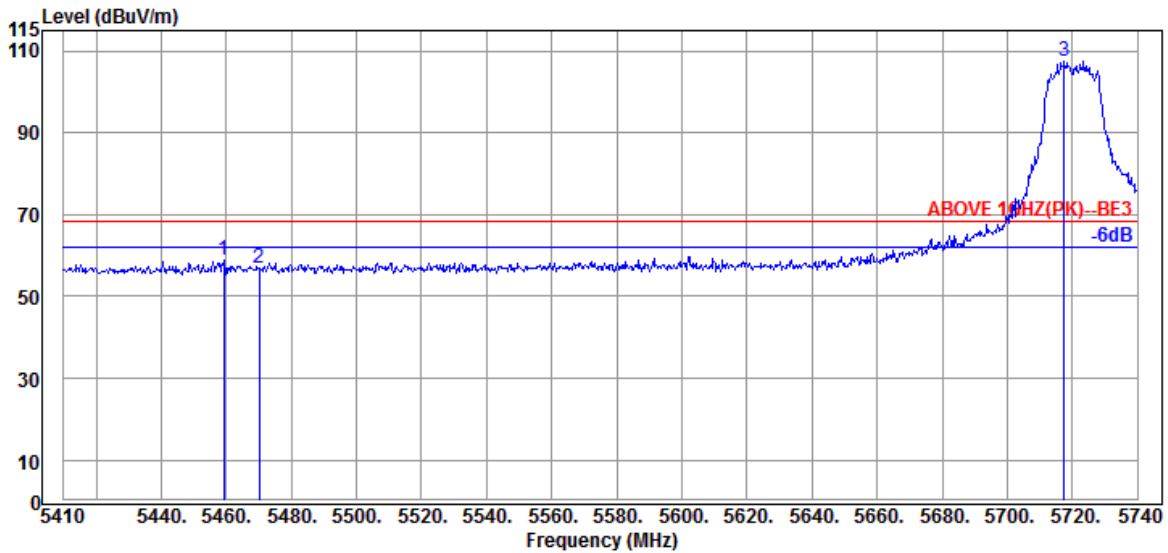


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.170	34.50	10.89	34.24	47.71	58.86	68.20	9.34	Peak
5470.060	34.47	10.91	34.24	45.75	56.89	68.20	11.31	Peak
@ 5717.560	34.53	11.05	34.32	96.38	107.64	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

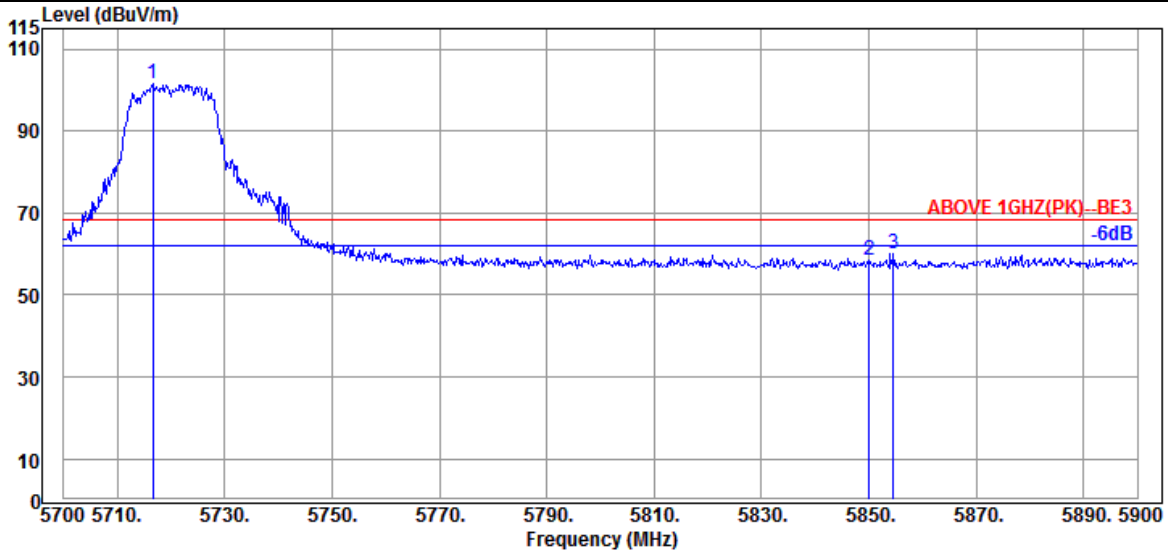

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.600	34.53	11.05	34.32	90.18	101.44	---	---	Peak
5850.000	35.10	11.10	34.38	46.78	58.60	68.20	9.60	Peak
5854.600	35.10	11.10	34.38	48.11	59.93	68.20	8.27	Peak

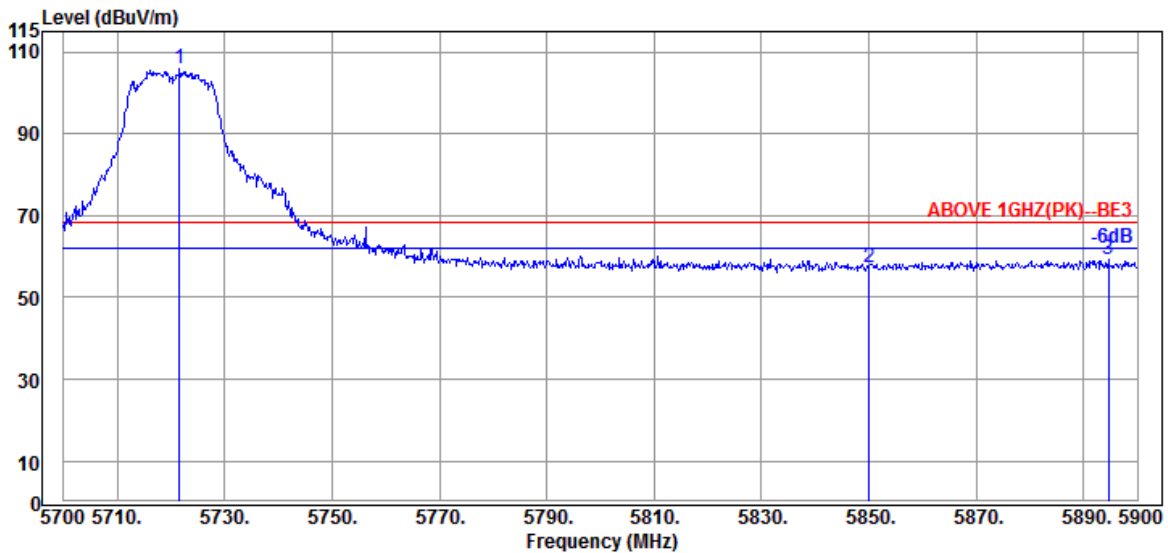


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.600	34.53	11.05	34.32	94.56	105.82	---	---	Peak
5850.000	35.10	11.10	34.38	45.64	57.46	68.20	10.74	Peak
5894.600	35.40	11.12	34.40	47.10	59.22	68.20	8.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

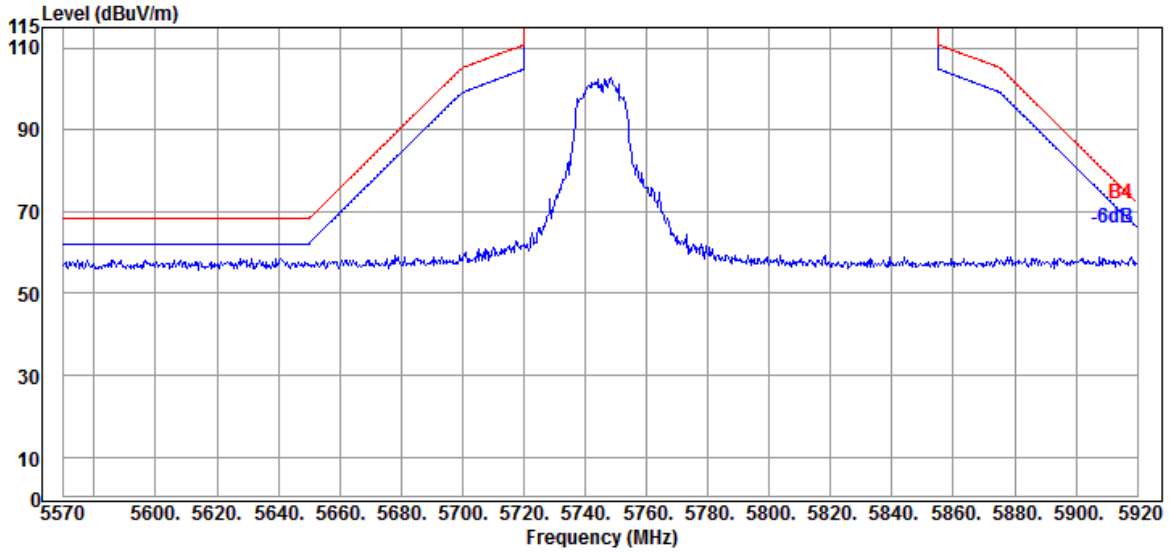


Antenna at Vertical Polarization

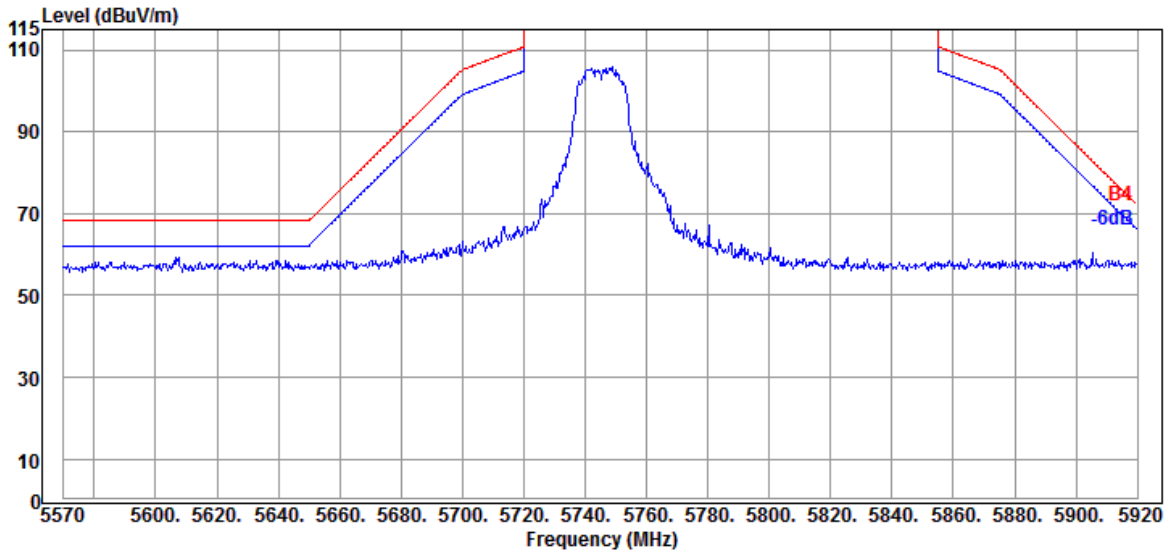


Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

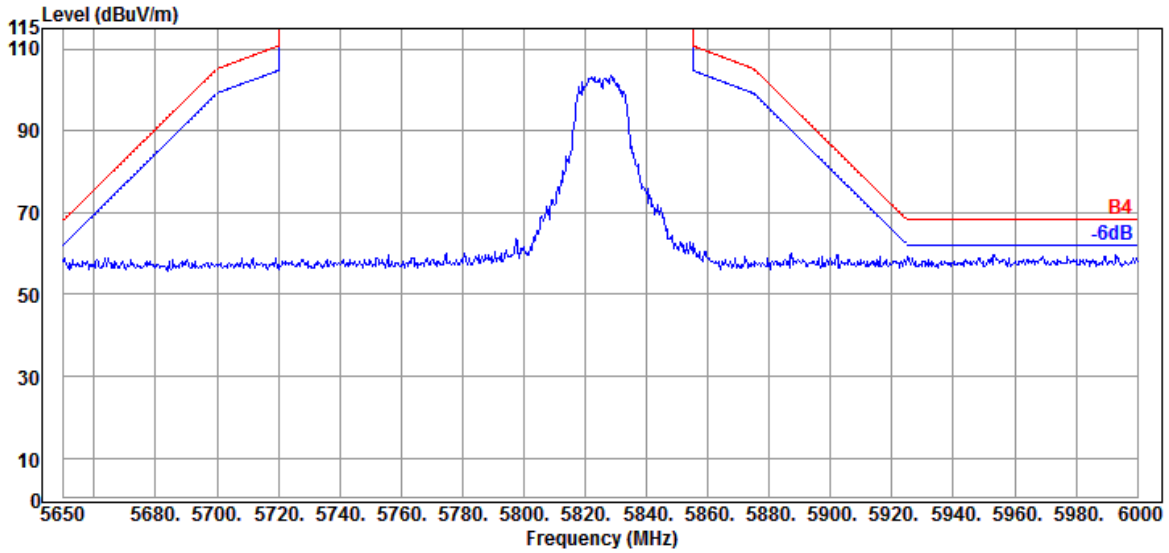

Antenna at Vertical Polarization

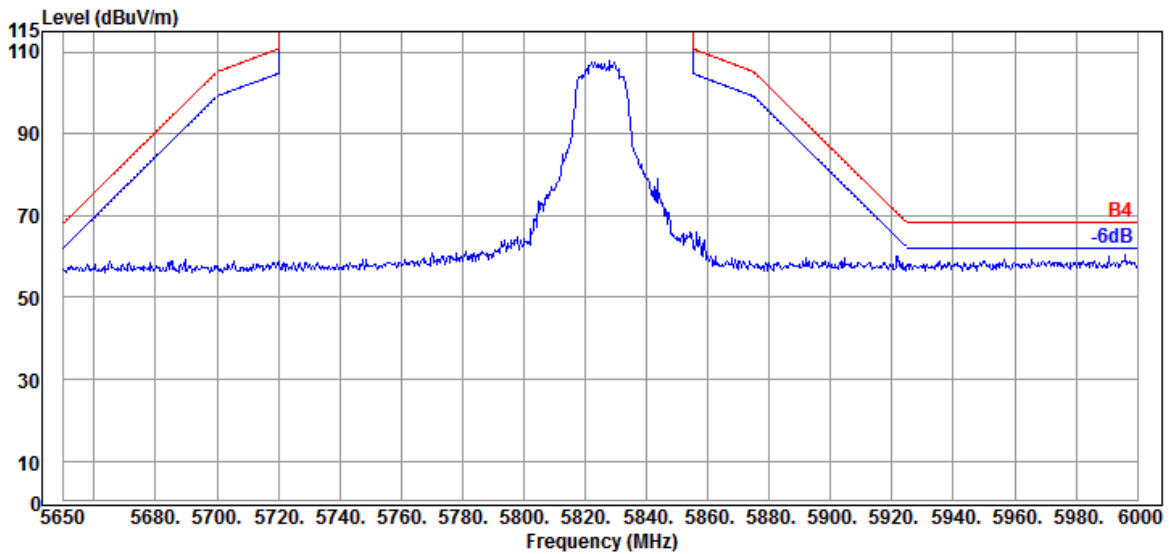


Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

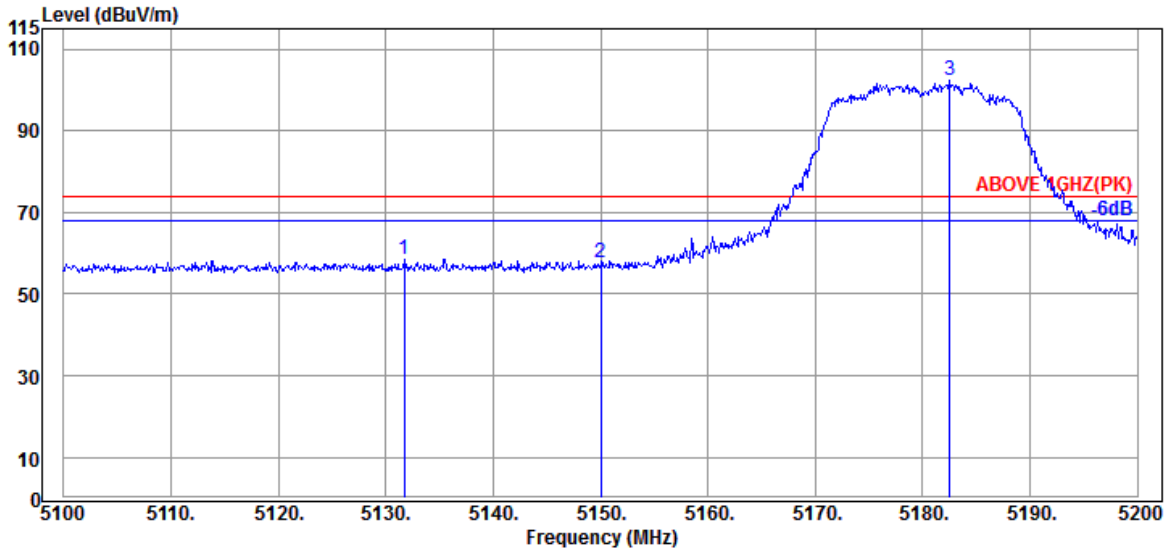

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.700	34.17	10.70	34.36	48.11	58.62	74.00	15.38	Peak
5150.000	34.20	10.70	34.35	47.16	57.71	74.00	16.29	Peak
@ 5182.500	34.20	10.72	34.34	91.79	102.37	---	---	Peak

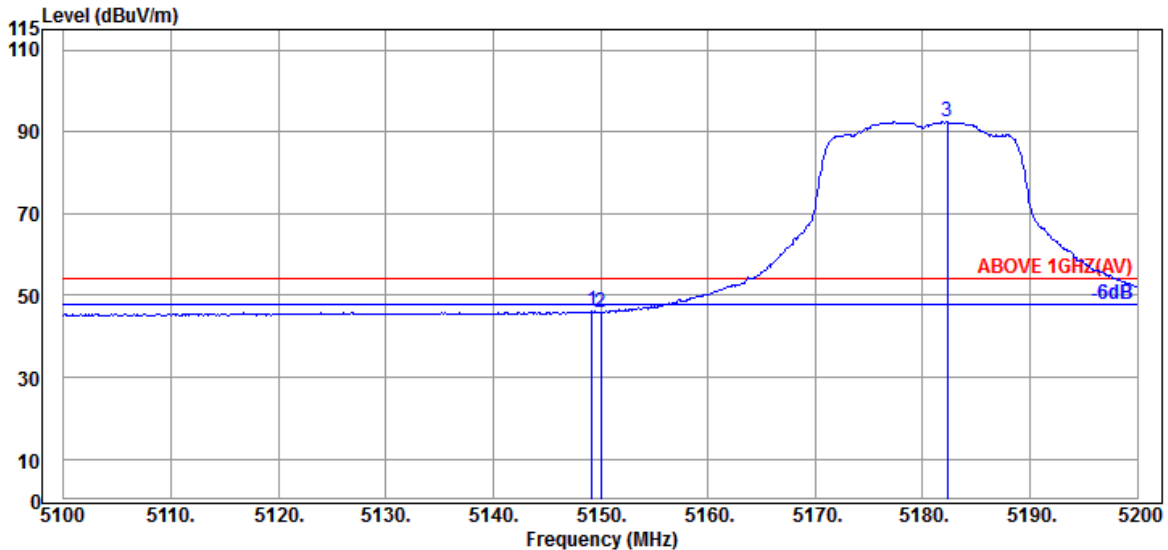


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	35.58	46.13	54.00	7.87	Average
5150.000	34.20	10.70	34.35	35.40	45.95	54.00	8.05	Average
@ 5182.300	34.20	10.72	34.34	81.81	92.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

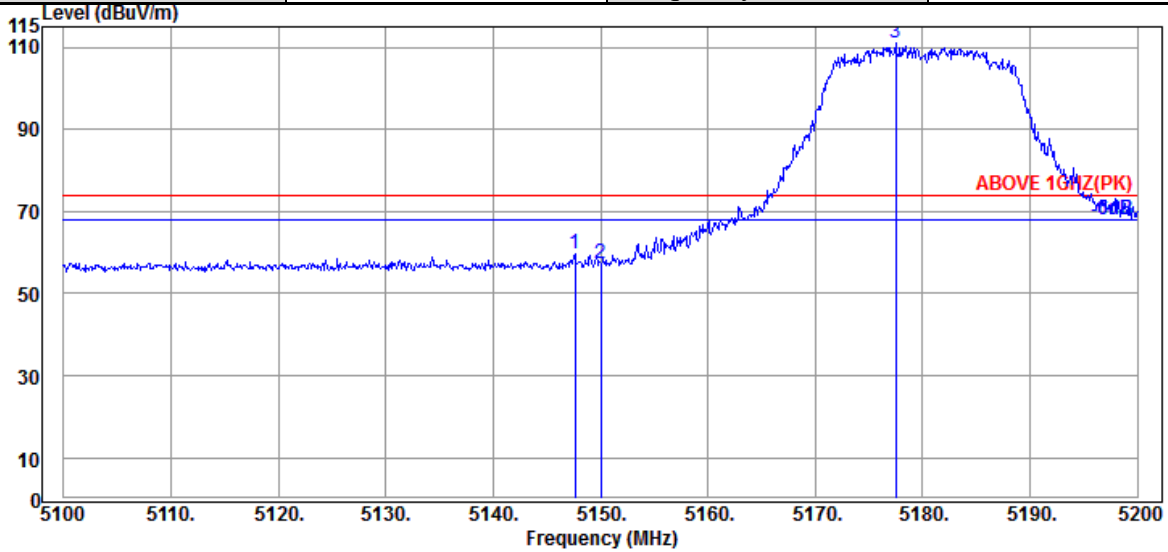

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	34.20	10.70	34.35	48.97	59.52	74.00	14.48	Peak
5150.000	34.20	10.70	34.35	46.88	57.43	74.00	16.57	Peak
@ 5177.500	34.20	10.72	34.34	100.56	111.14	---	---	Peak

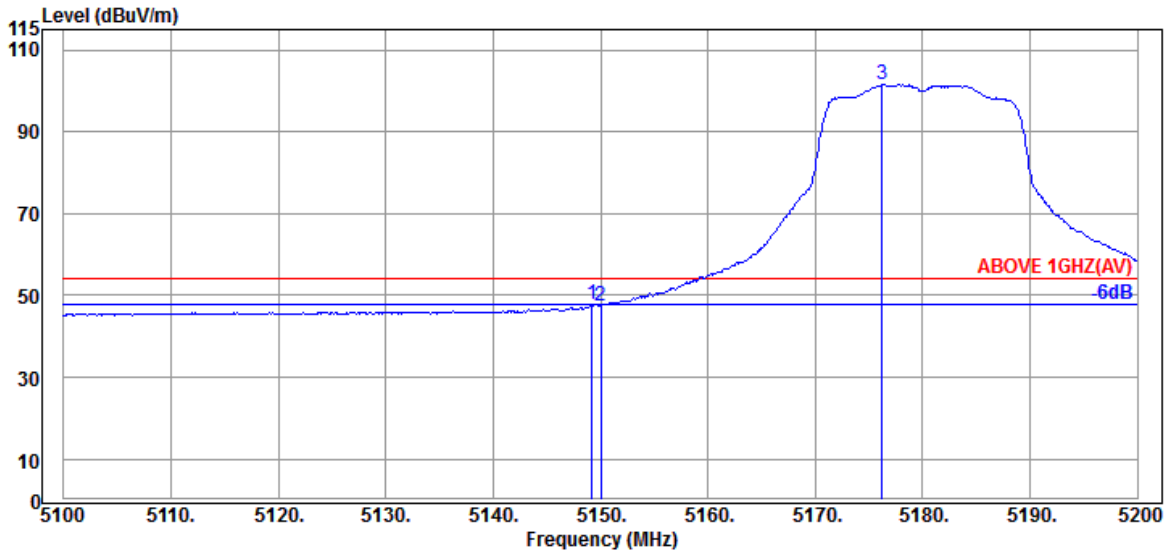


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	37.18	47.73	54.00	6.27	Average
5150.000	34.20	10.70	34.35	37.06	47.61	54.00	6.39	Average
@ 5176.200	34.20	10.72	34.34	90.99	101.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

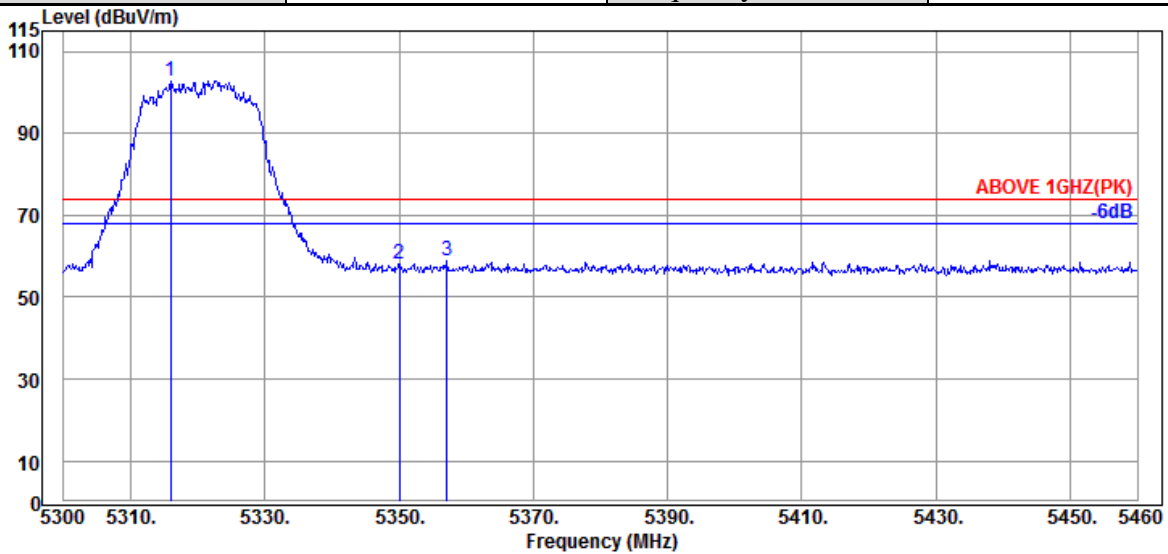

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.53	10.81	34.29	91.81	102.86	---	---	Peak
5350.080	34.60	10.83	34.27	46.80	57.96	74.00	16.04	Peak
5357.120	34.63	10.85	34.27	47.56	58.77	74.00	15.23	Peak

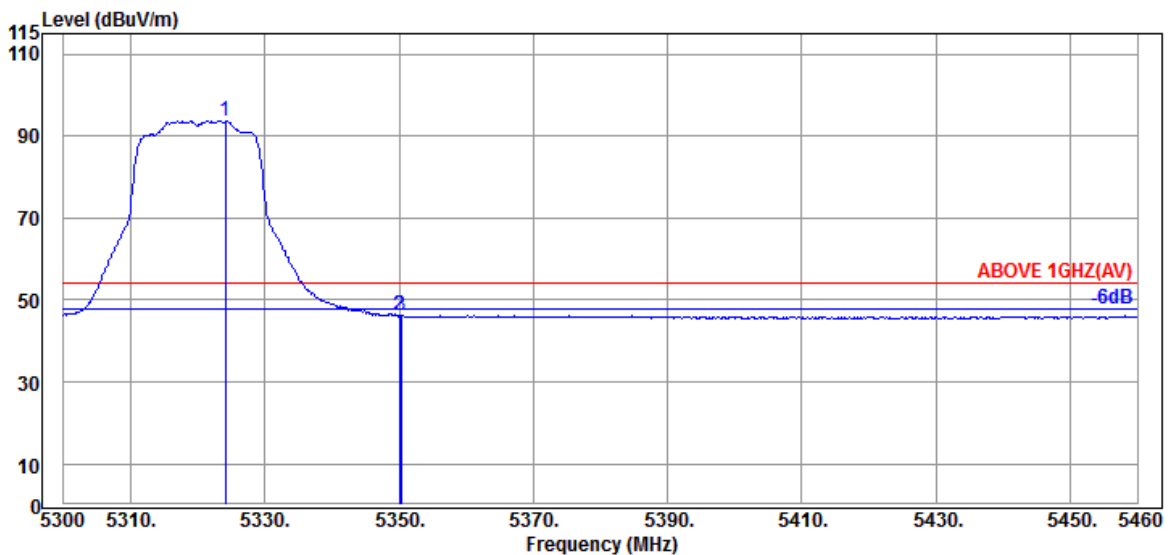


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.160	34.57	10.83	34.28	82.70	93.82	---	---	Average
5350.080	34.60	10.83	34.27	34.89	46.05	54.00	7.95	Average
5350.240	34.60	10.83	34.27	35.04	46.20	54.00	7.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

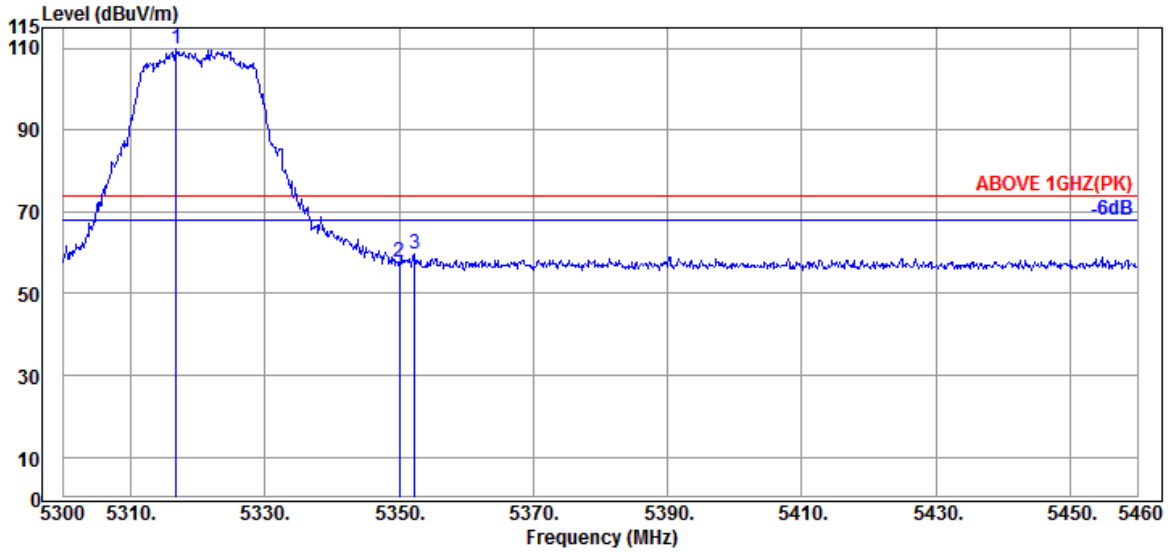

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	10.81	34.29	98.99	110.04	---	---	Peak
5350.080	34.60	10.83	34.27	46.56	57.72	74.00	16.28	Peak
5352.320	34.60	10.83	34.27	48.67	59.83	74.00	14.17	Peak

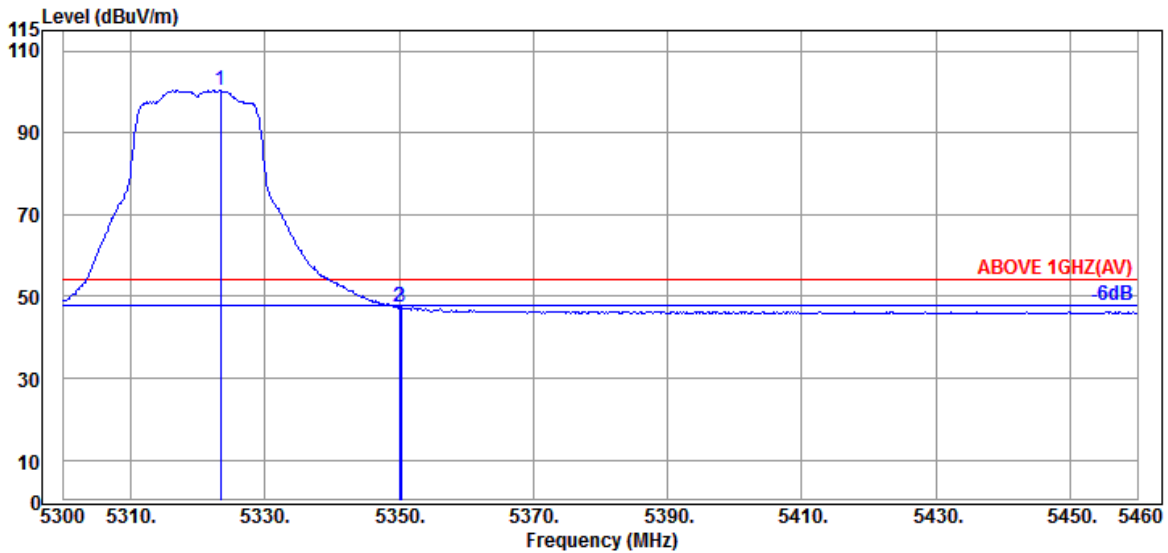


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.57	10.83	34.28	89.45	100.57	---	---	Average
5350.080	34.60	10.83	34.27	36.15	47.31	54.00	6.69	Average
5350.240	34.60	10.83	34.27	36.16	47.32	54.00	6.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

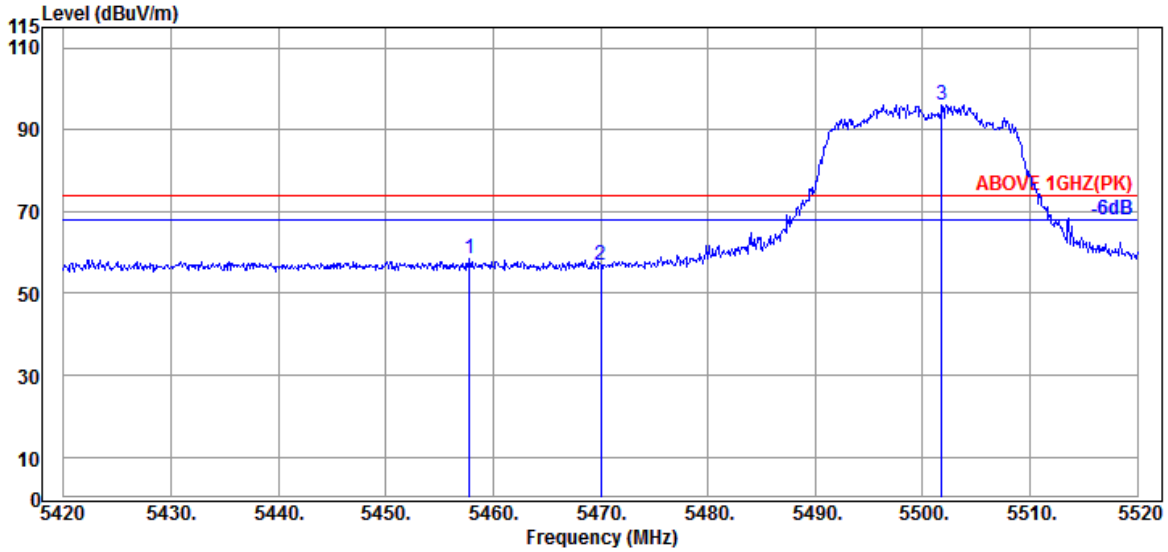

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.50	10.89	34.24	47.52	58.67	74.00	15.33	Peak
5470.000	34.47	10.91	34.24	45.74	56.88	74.00	17.12	Peak
@ 5501.800	34.40	10.93	34.24	85.06	96.15	---	---	Peak

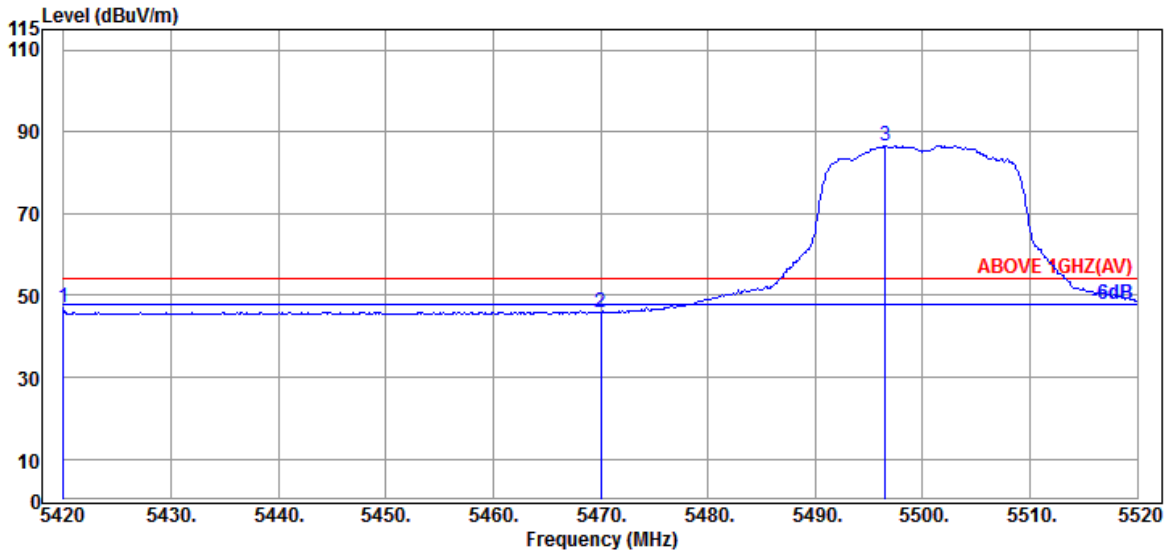


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.000	34.60	10.87	34.26	35.94	47.15	54.00	6.85	Average
5470.000	34.47	10.91	34.24	34.56	45.70	54.00	8.30	Average
@ 5496.500	34.40	10.93	34.23	75.54	86.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

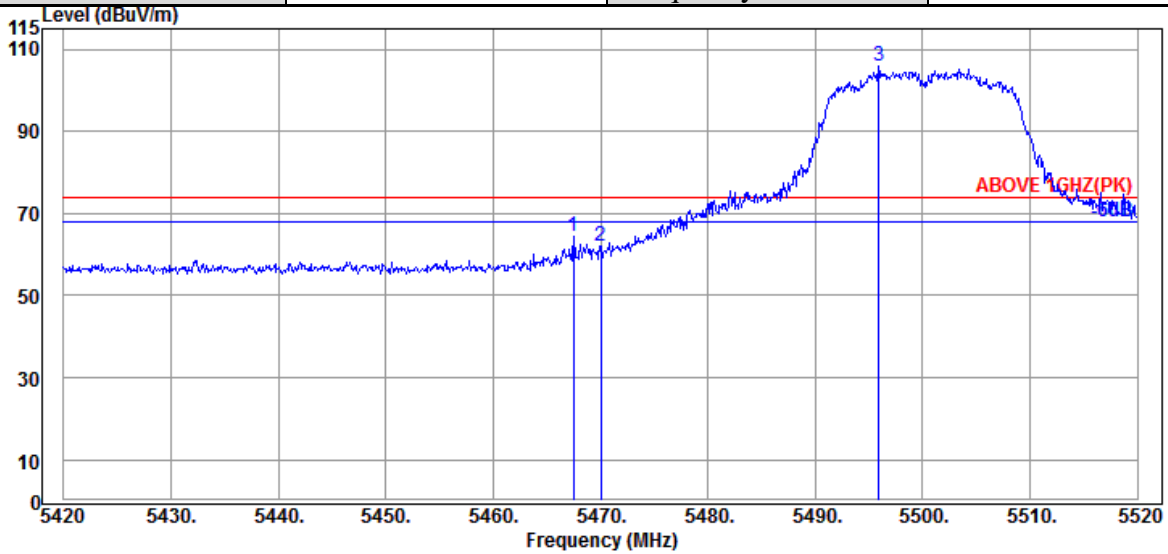

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	10.91	34.24	53.46	64.60	74.00	9.40	Peak
5470.000	34.47	10.91	34.24	51.08	62.22	74.00	11.78	Peak
@ 5495.900	34.40	10.93	34.23	94.76	105.86	---	---	Peak

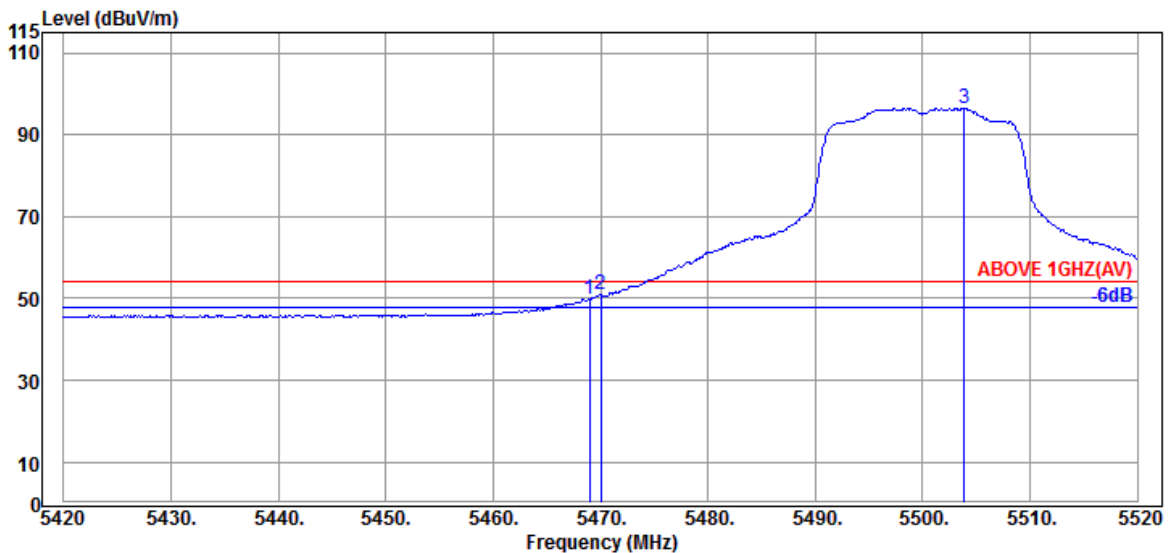


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	38.61	49.75	54.00	4.25	Average
5470.000	34.47	10.91	34.24	39.80	50.94	54.00	3.06	Average
@ 5503.900	34.40	10.93	34.24	85.32	96.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

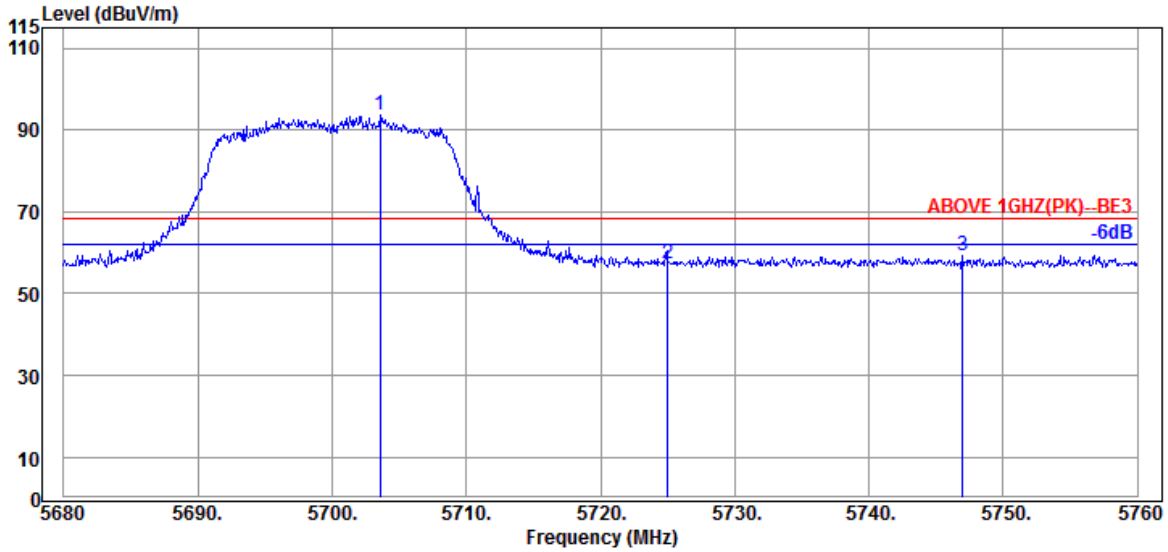

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.600	34.40	11.03	34.31	82.41	93.53	---	---	Peak
5725.040	34.67	11.05	34.32	45.86	57.26	68.20	10.94	Peak
5746.960	34.80	11.06	34.33	47.88	59.41	68.20	8.79	Peak

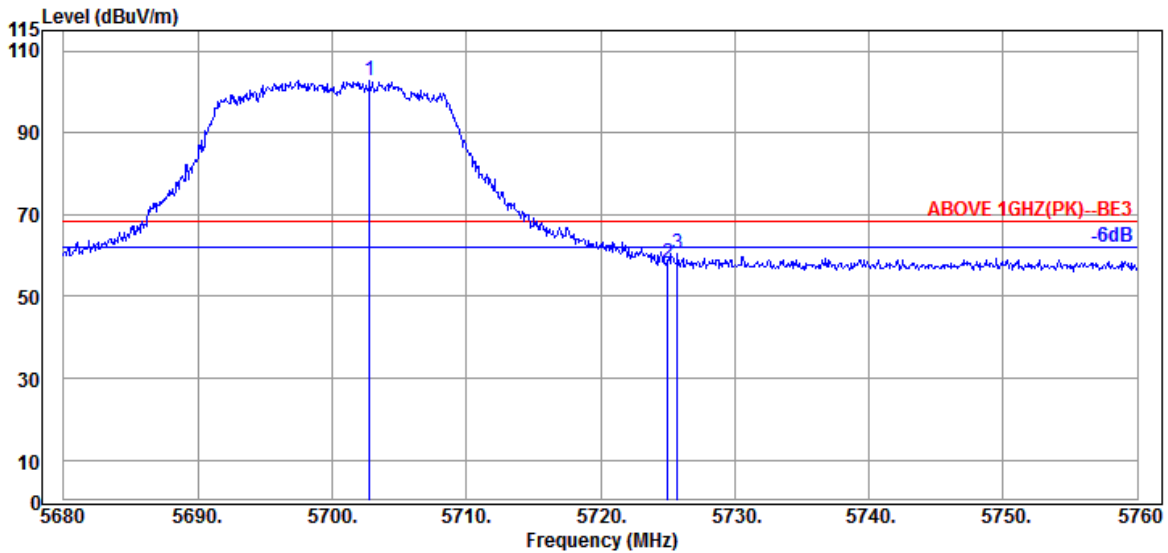


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.800	34.40	11.03	34.31	91.60	102.72	---	---	Peak
5725.040	34.67	11.05	34.32	46.77	58.17	68.20	10.03	Peak
5725.760	34.67	11.05	34.32	48.99	60.39	68.20	7.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

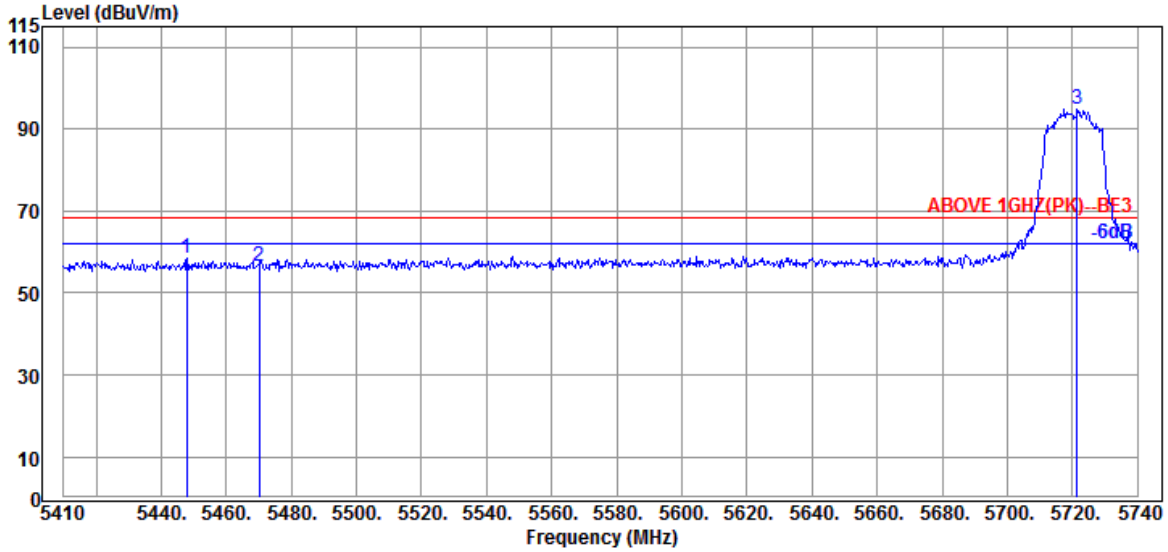

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.950	34.50	10.89	34.25	47.24	58.38	68.20	9.82	Peak
5470.060	34.47	10.91	34.24	45.46	56.60	68.20	11.60	Peak
@ 5721.520	34.53	11.05	34.32	83.67	94.93	---	---	Peak

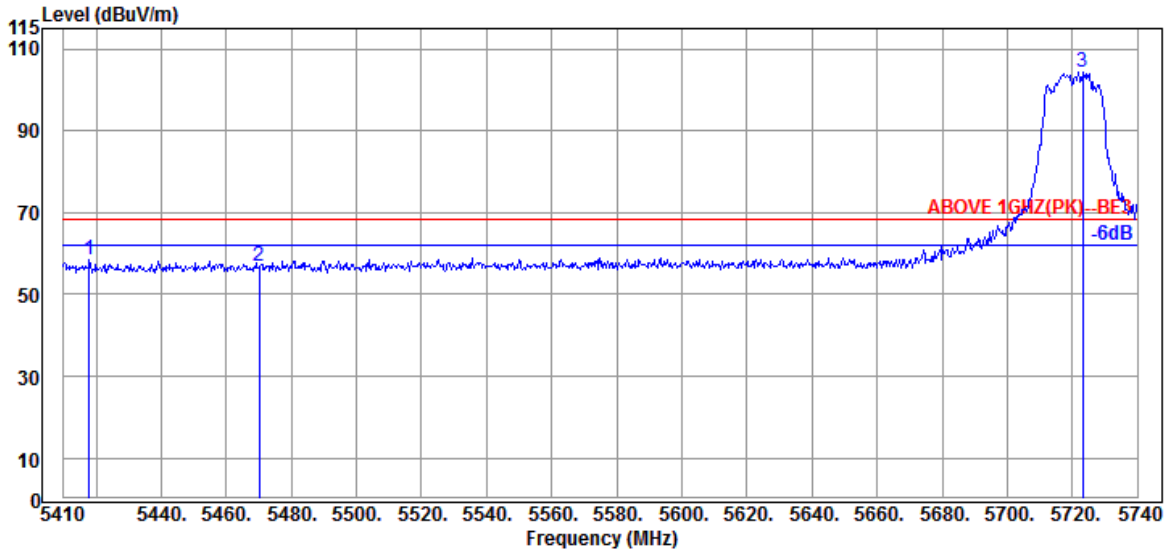


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.920	34.60	10.87	34.26	47.17	58.38	68.20	9.82	Peak
5470.060	34.47	10.91	34.24	45.64	56.78	68.20	11.42	Peak
@ 5723.170	34.67	11.05	34.32	92.82	104.22	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

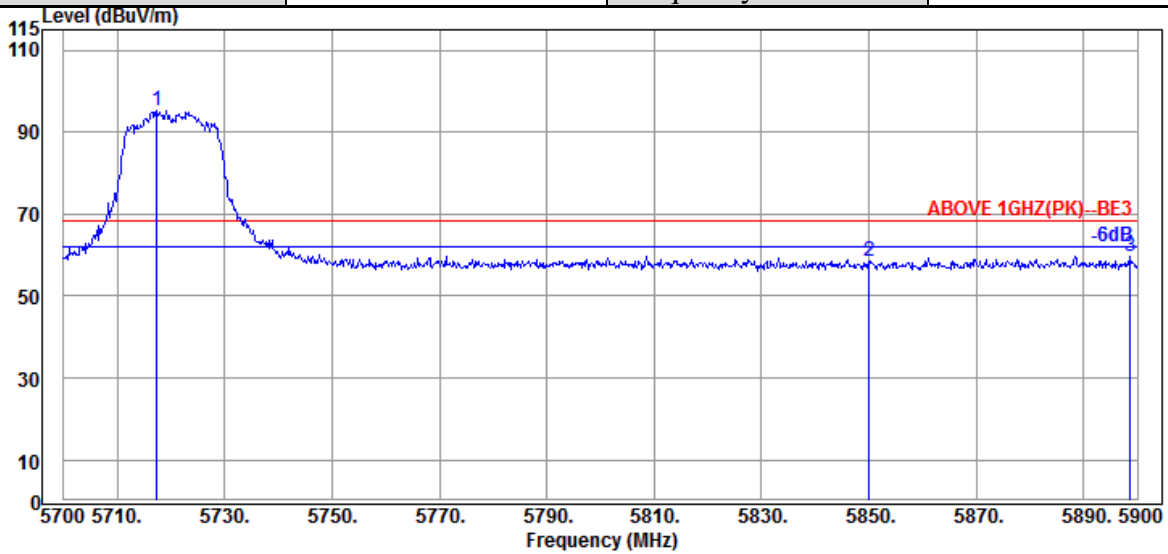

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.400	34.53	11.05	34.32	83.92	95.18	---	---	Peak
5850.000	35.10	11.10	34.38	46.52	58.34	68.20	9.86	Peak
5898.600	35.40	11.14	34.40	47.66	59.80	68.20	8.40	Peak

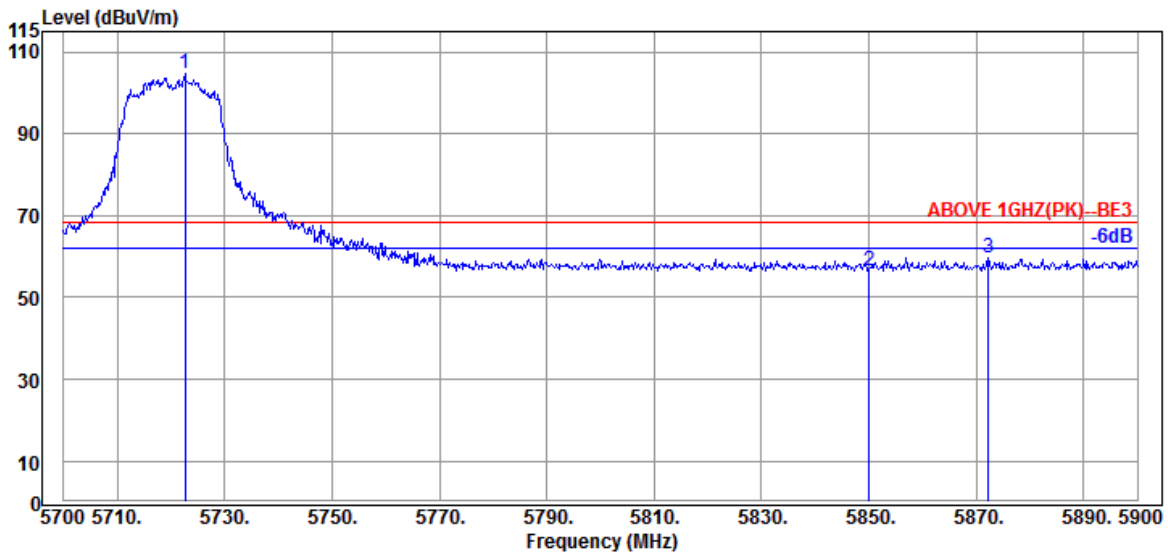


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	34.67	11.05	34.32	93.31	104.71	---	---	Peak
5850.000	35.10	11.10	34.38	44.52	56.34	68.20	11.86	Peak
5872.200	35.20	11.12	34.39	47.55	59.48	68.20	8.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

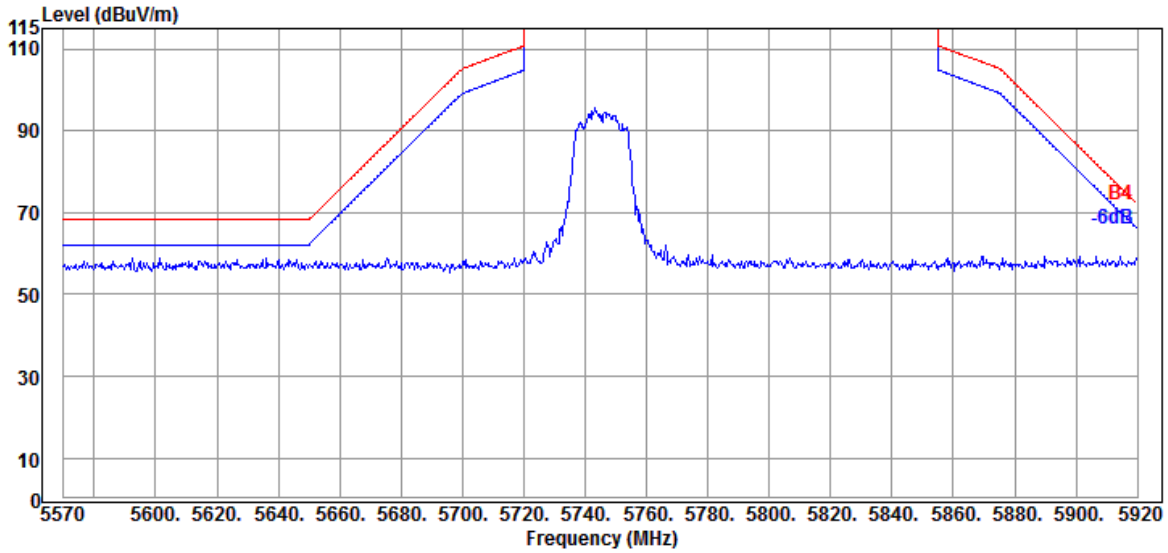


Antenna at Vertical Polarization

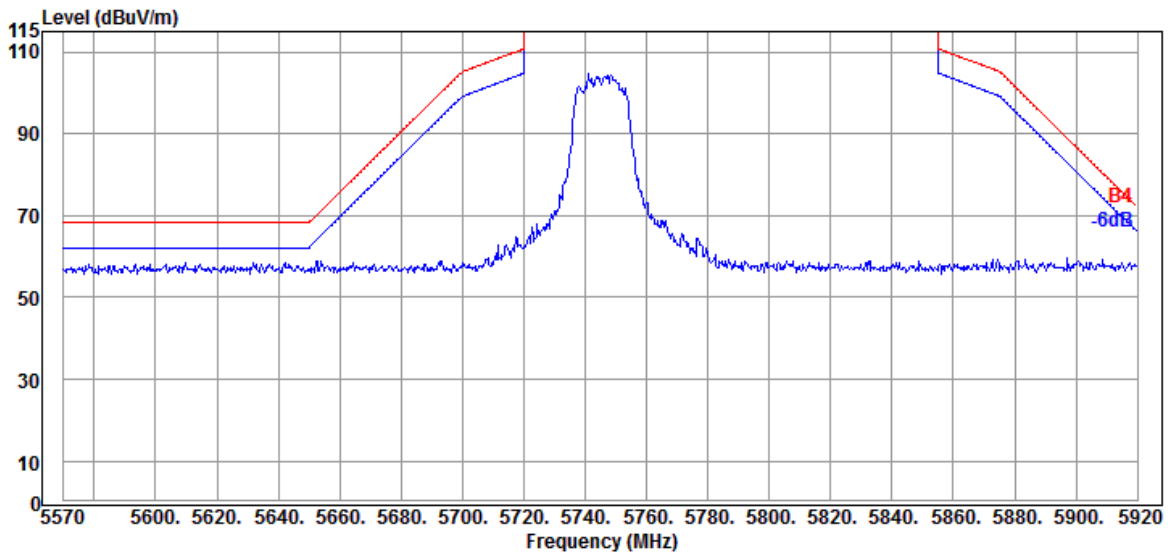


Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

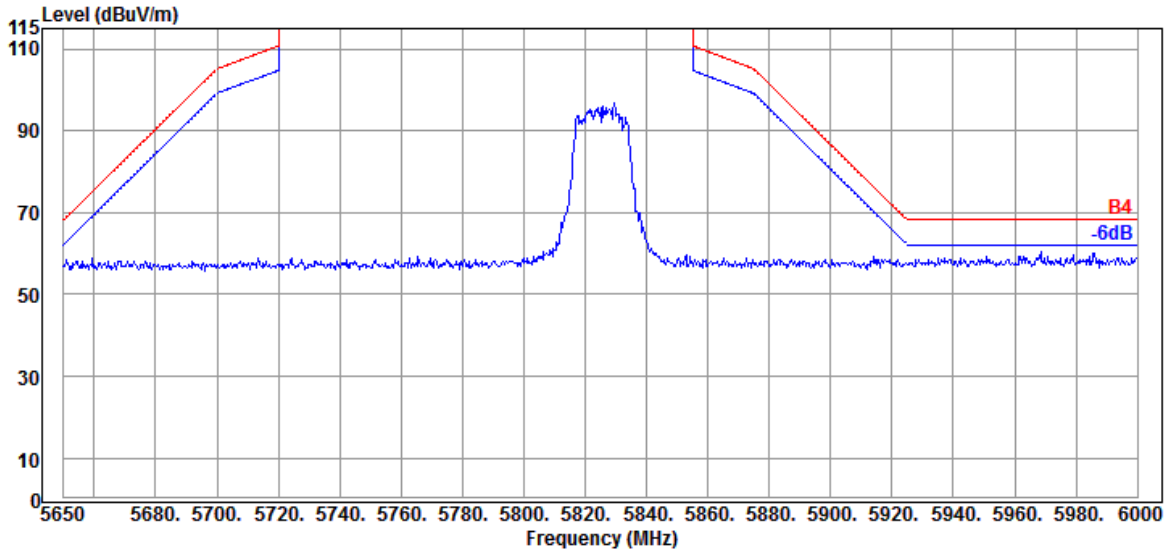

Antenna at Vertical Polarization

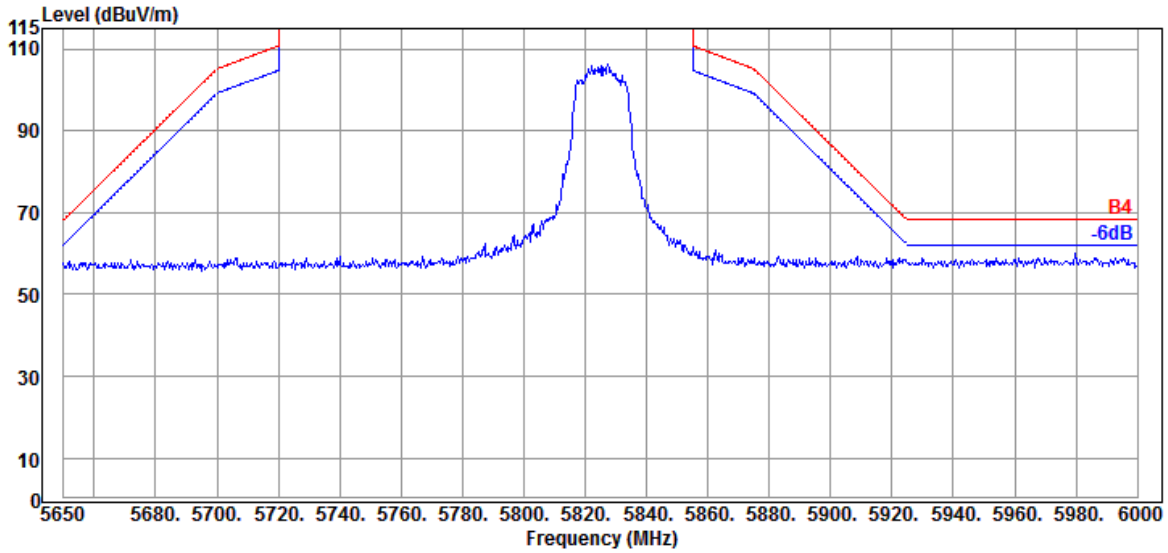


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

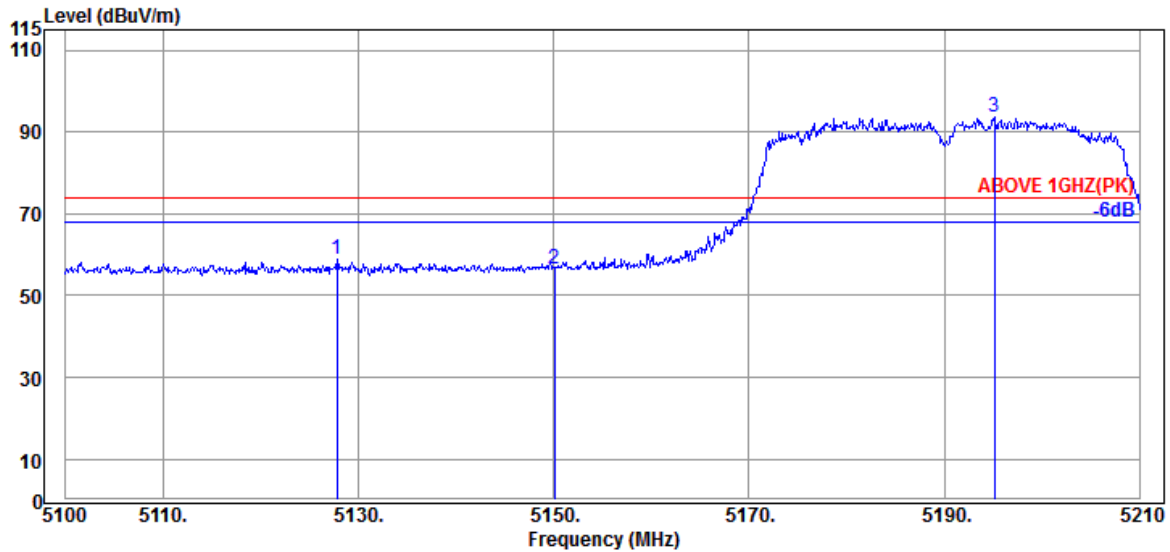

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.830	34.17	10.70	34.36	48.31	58.82	74.00	15.18	Peak
5150.050	34.20	10.70	34.35	46.09	56.64	74.00	17.36	Peak
@ 5195.150	34.20	10.74	34.33	83.13	93.74	---	---	Peak

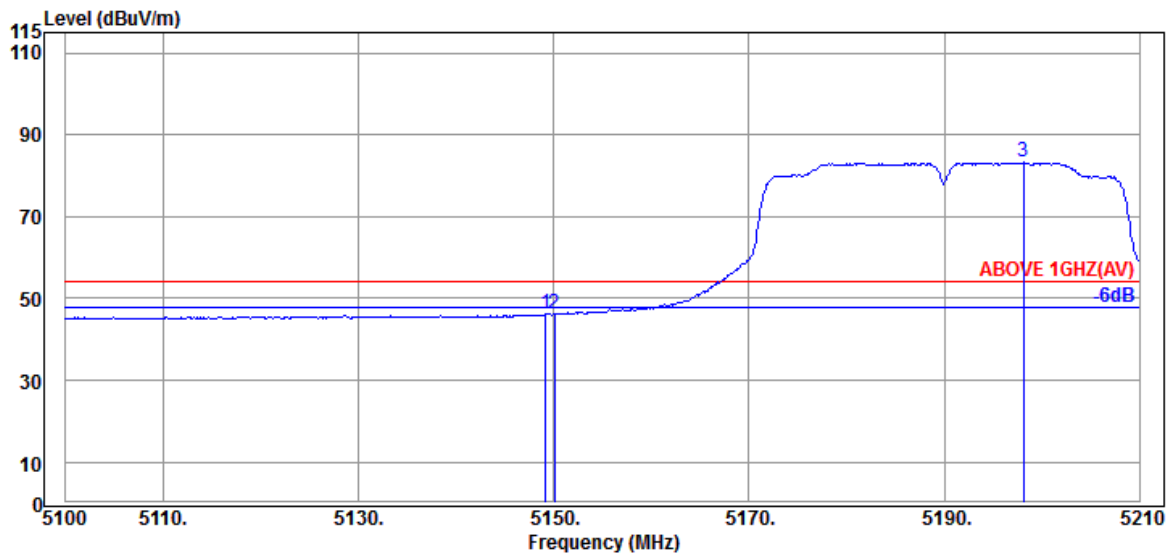


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	10.70	34.35	35.65	46.20	54.00	7.80	Average
5150.050	34.20	10.70	34.35	35.58	46.13	54.00	7.87	Average
@ 5198.120	34.20	10.74	34.33	72.59	83.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

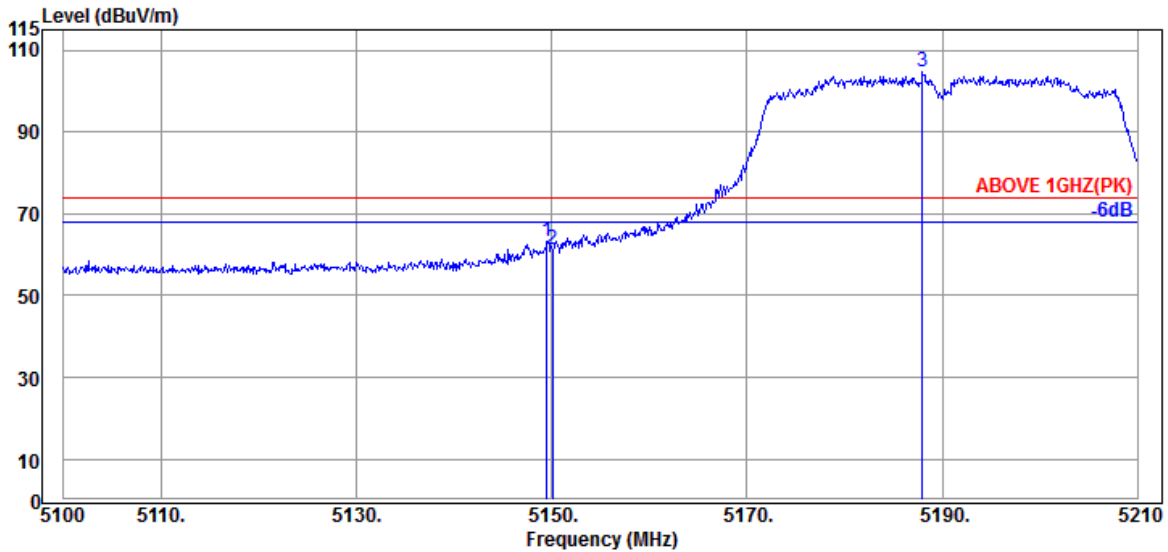

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	52.72	63.27	74.00	10.73	Peak
5150.050	34.20	10.70	34.35	50.78	61.33	74.00	12.67	Peak
@ 5188.000	34.20	10.74	34.34	94.06	104.66	---	---	Peak

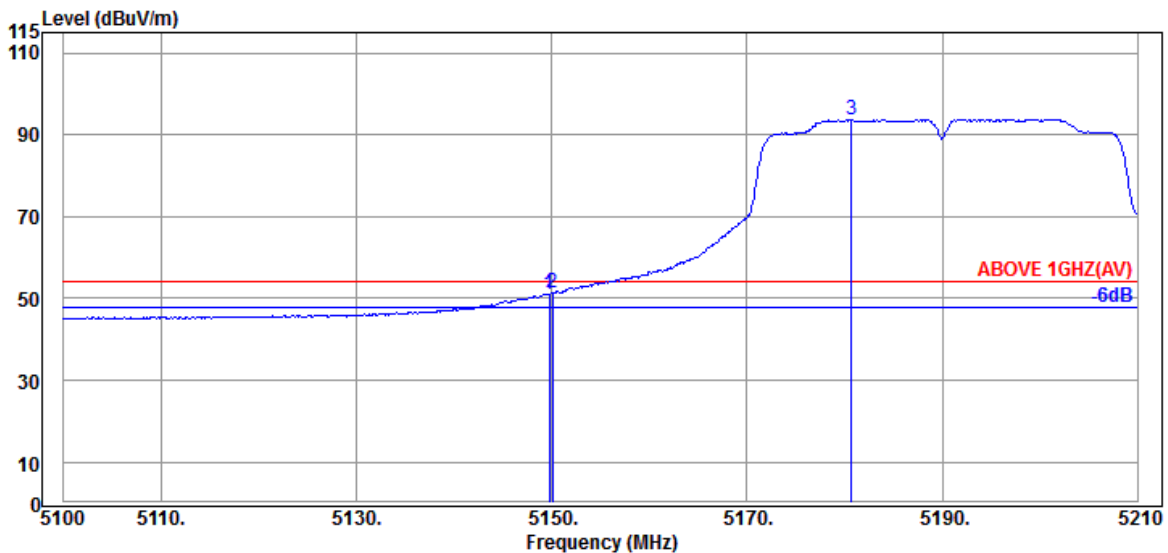


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	40.57	51.12	54.00	2.88	Average
5150.050	34.20	10.70	34.35	40.73	51.28	54.00	2.72	Average
@ 5180.740	34.20	10.72	34.34	83.21	93.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

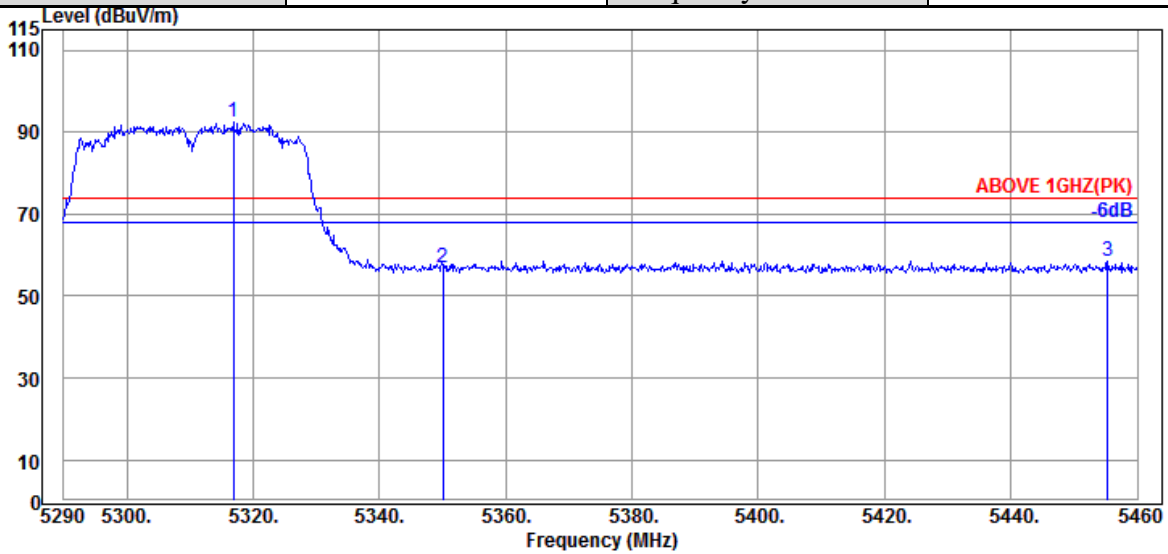

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.860	34.53	10.81	34.29	81.24	92.29	---	---	Peak
5350.010	34.60	10.83	34.27	45.82	56.98	74.00	17.02	Peak
5455.240	34.50	10.89	34.24	47.52	58.67	74.00	15.33	Peak

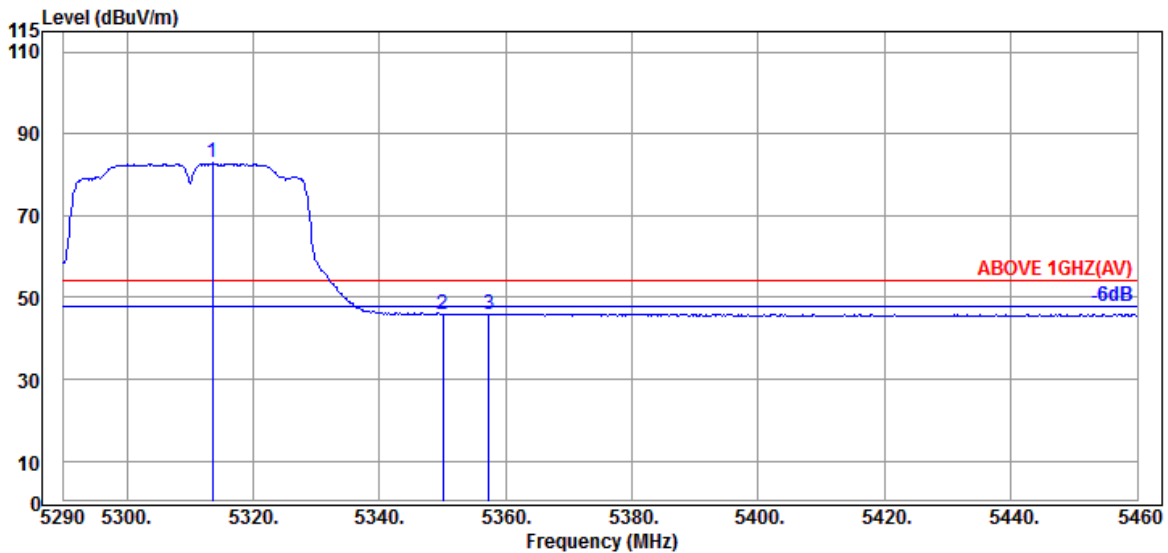


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.630	34.53	10.81	34.29	71.76	82.81	---	---	Average
5350.010	34.60	10.83	34.27	34.66	45.82	54.00	8.18	Average
5357.320	34.63	10.85	34.27	34.76	45.97	54.00	8.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

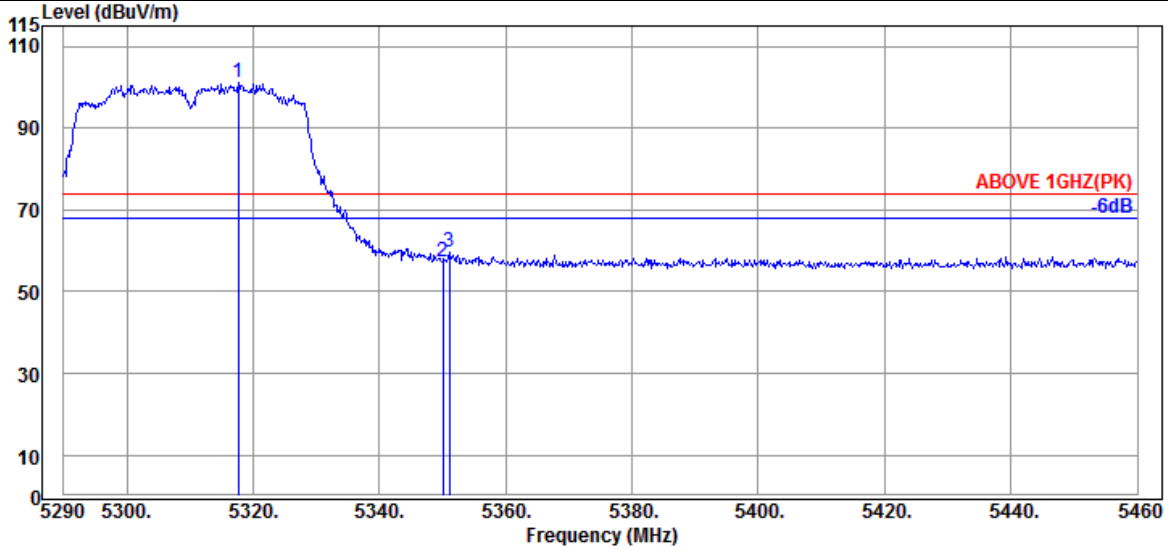

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.710	34.53	10.81	34.29	89.94	100.99	---	---	Peak
5350.010	34.60	10.83	34.27	46.30	57.46	74.00	16.54	Peak
5351.030	34.60	10.83	34.27	48.69	59.85	74.00	14.15	Peak

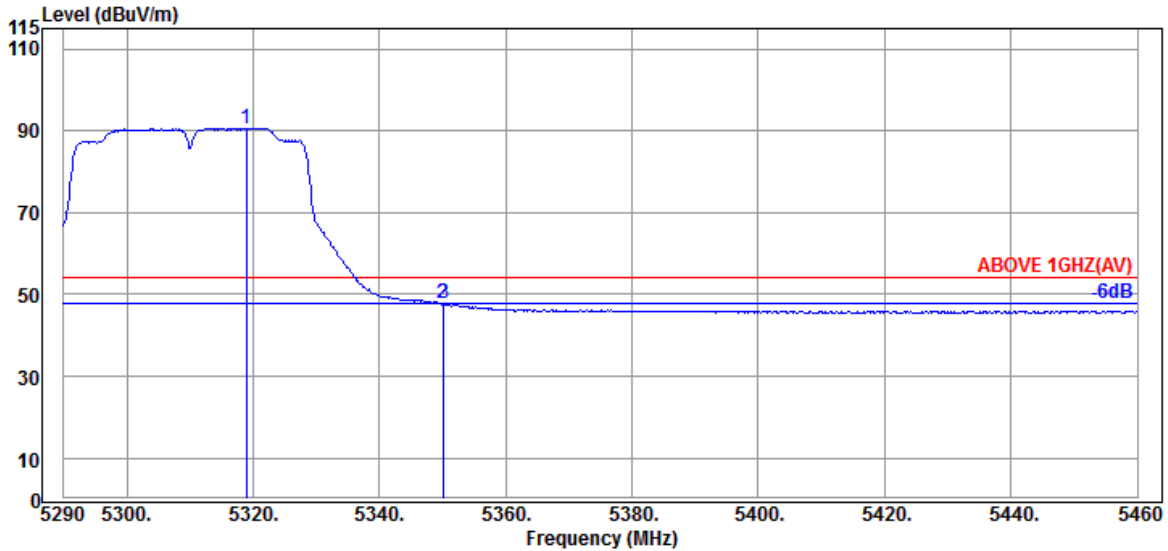


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.900	34.53	10.81	34.29	79.61	90.66	---	---	Average
5350.010	34.60	10.83	34.27	36.56	47.72	54.00	6.28	Average
5350.180	34.60	10.83	34.27	36.47	47.63	54.00	6.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

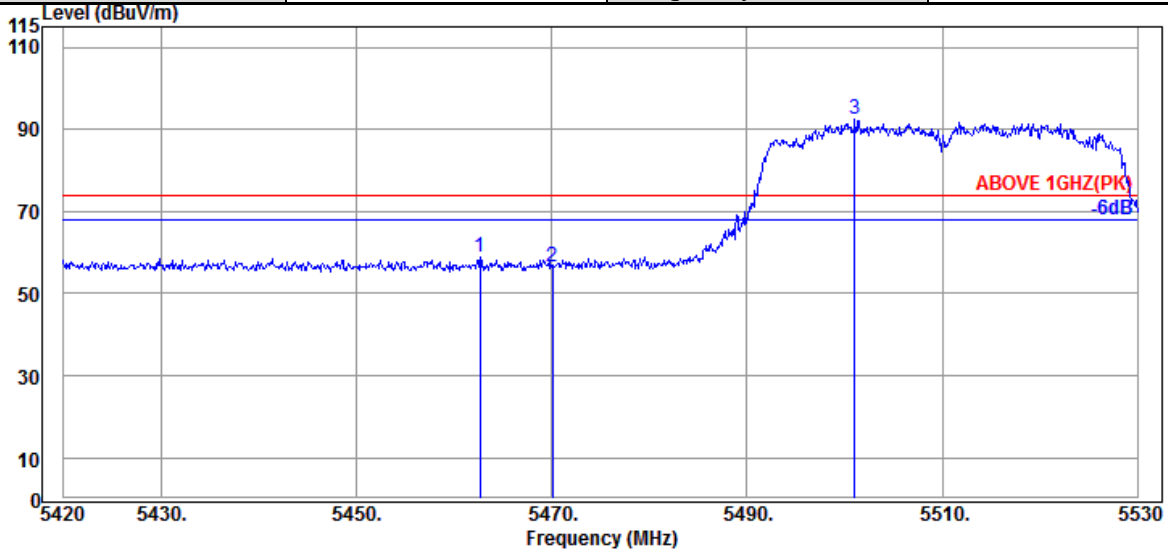

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.680	34.50	10.91	34.24	47.63	58.80	74.00	15.20	Peak
5470.050	34.47	10.91	34.24	45.44	56.58	74.00	17.42	Peak
@ 5501.070	34.40	10.93	34.24	81.19	92.28	---	---	Peak

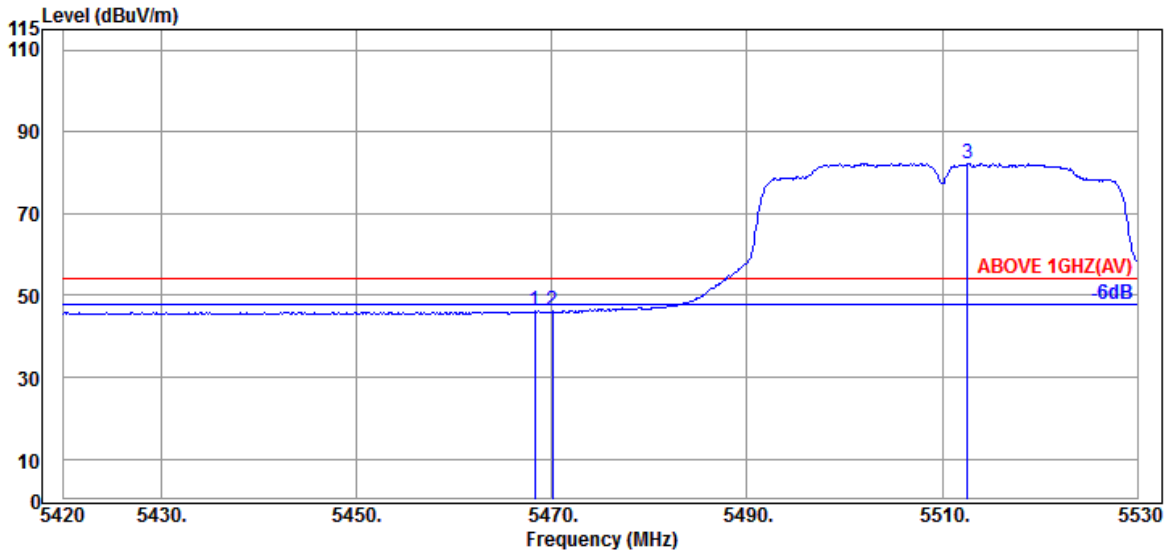


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.47	10.91	34.24	34.95	46.09	54.00	7.91	Average
5470.050	34.47	10.91	34.24	34.90	46.04	54.00	7.96	Average
@ 5512.620	34.37	10.93	34.24	71.22	82.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

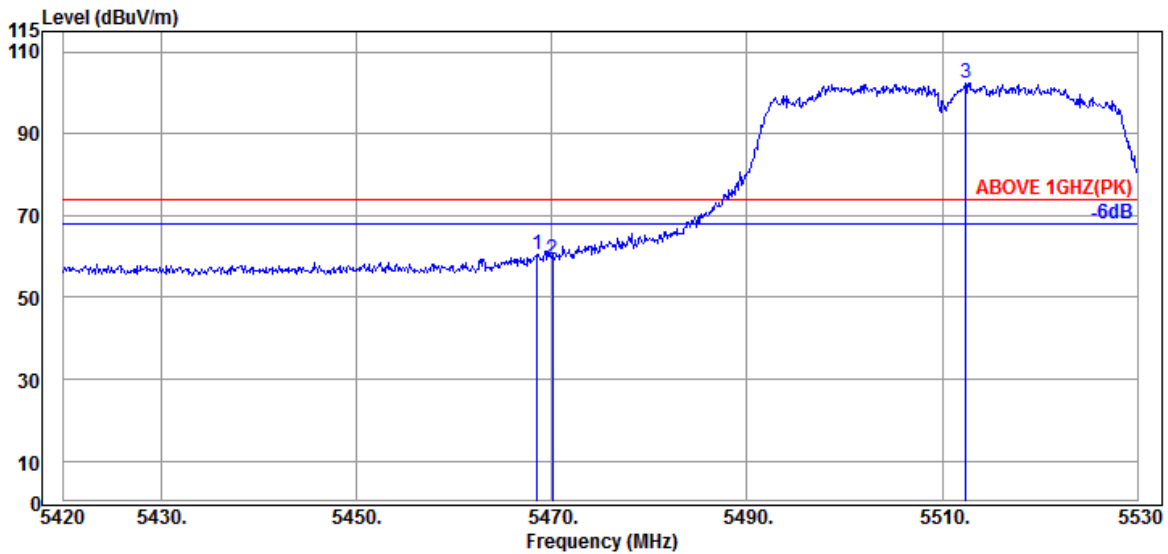

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.510	34.47	10.91	34.24	49.37	60.51	74.00	13.49	Peak
5470.050	34.47	10.91	34.24	48.23	59.37	74.00	14.63	Peak
@ 5512.400	34.37	10.93	34.24	91.25	102.31	---	---	Peak

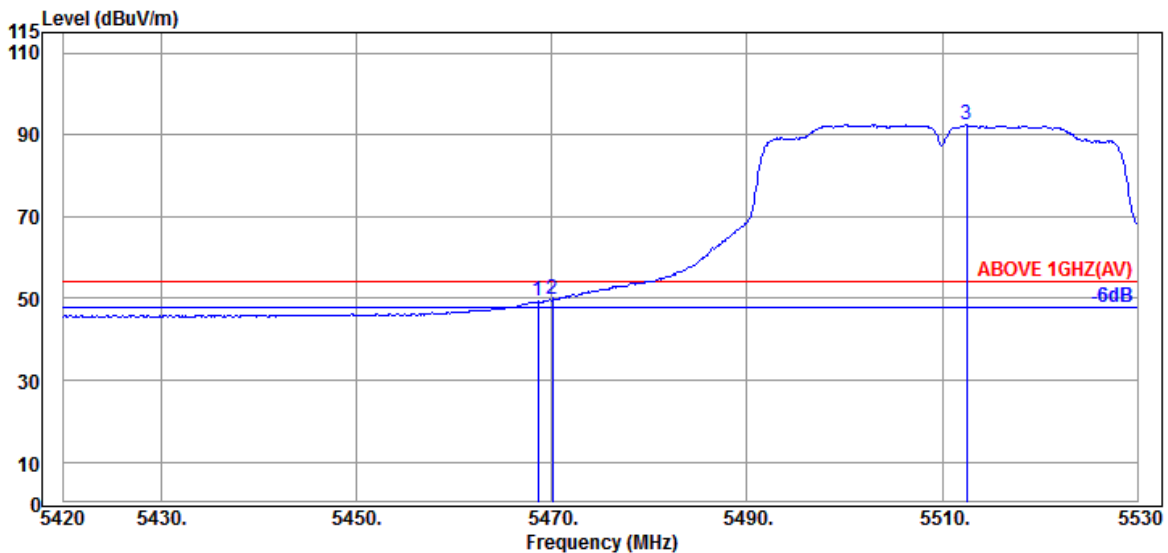


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.620	34.47	10.91	34.24	38.06	49.20	54.00	4.80	Average
5470.050	34.47	10.91	34.24	38.71	49.85	54.00	4.15	Average
@ 5512.510	34.37	10.93	34.24	81.47	92.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

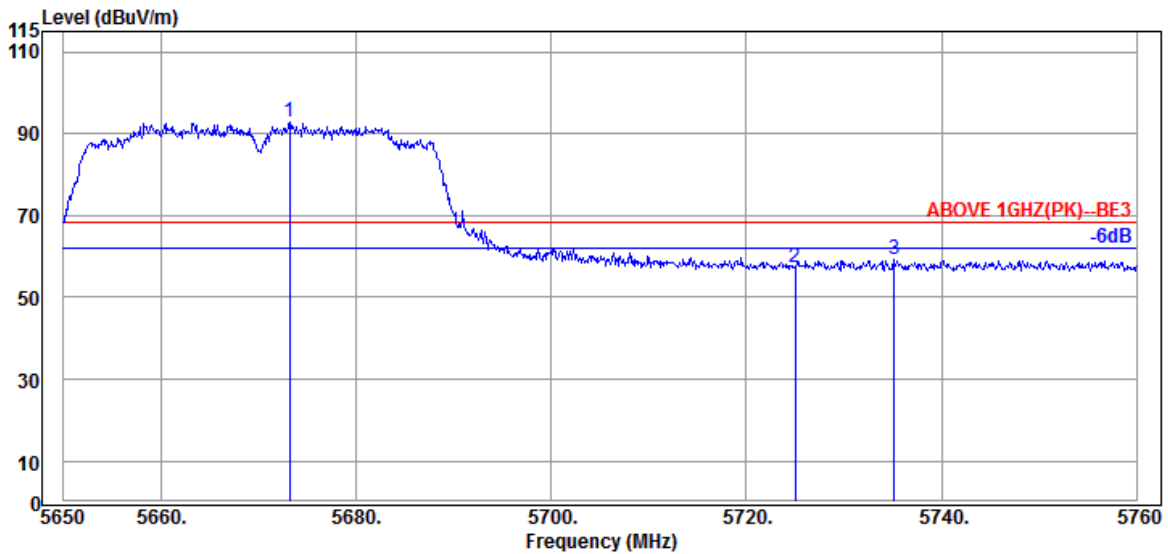

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5673.210	34.40	11.03	34.30	81.59	92.72	---	---	Peak
5725.020	34.67	11.05	34.32	46.04	57.44	68.20	10.76	Peak
5735.140	34.67	11.05	34.33	47.71	59.10	68.20	9.10	Peak

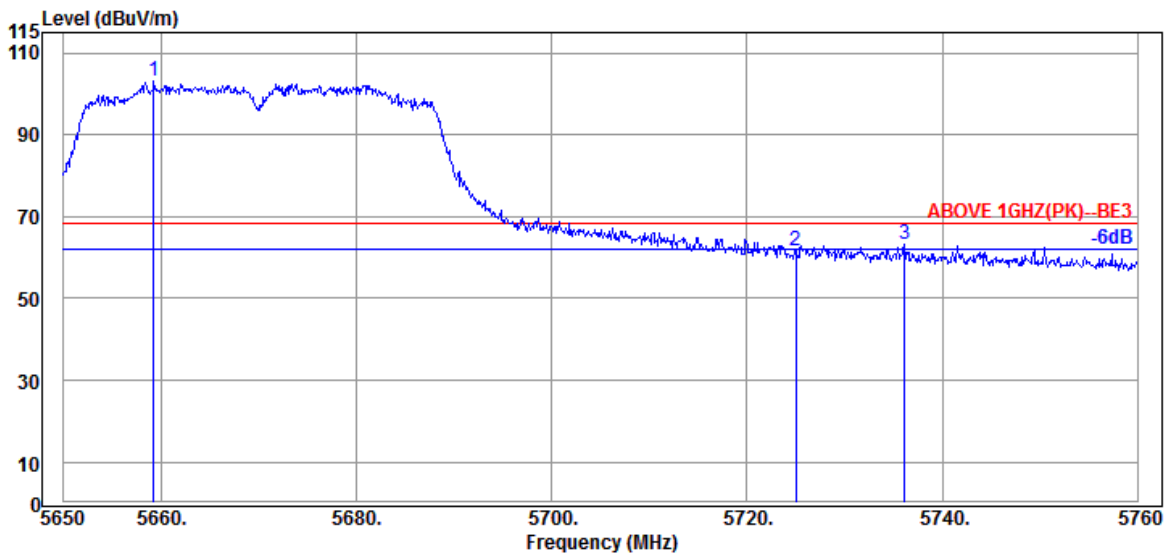


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5659.240	34.40	11.01	34.30	92.16	103.27	---	---	Peak
5725.020	34.67	11.05	34.32	50.09	61.49	68.20	6.71	Peak
5736.130	34.67	11.05	34.33	51.66	63.05	68.20	5.15	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

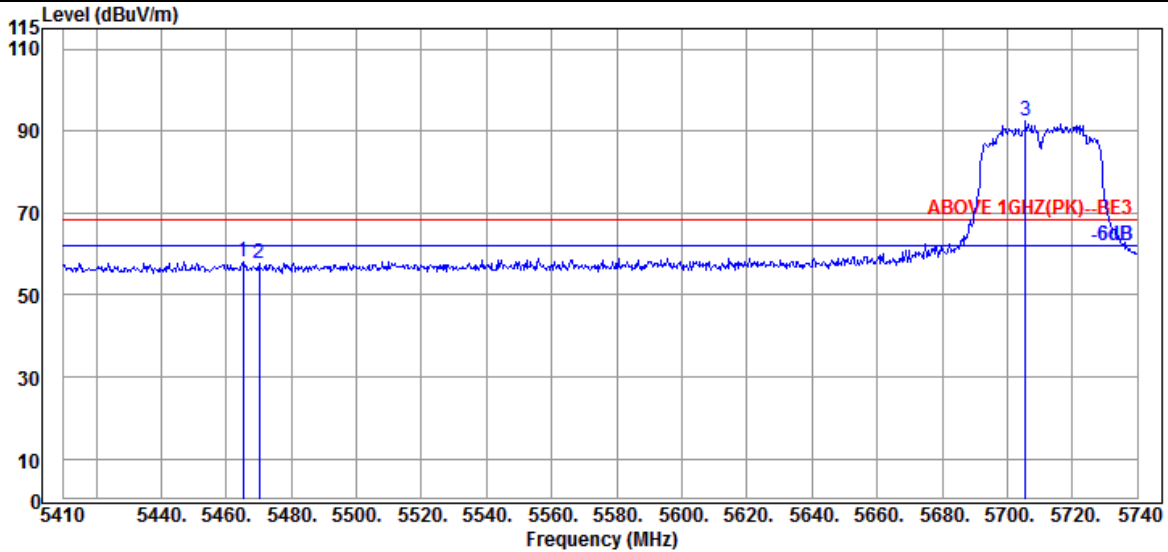

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.110	34.47	10.91	34.24	47.09	58.23	68.20	9.97	Peak
5470.060	34.47	10.91	34.24	46.38	57.52	68.20	10.68	Peak
@ 5705.680	34.53	11.03	34.32	81.21	92.45	---	---	Peak

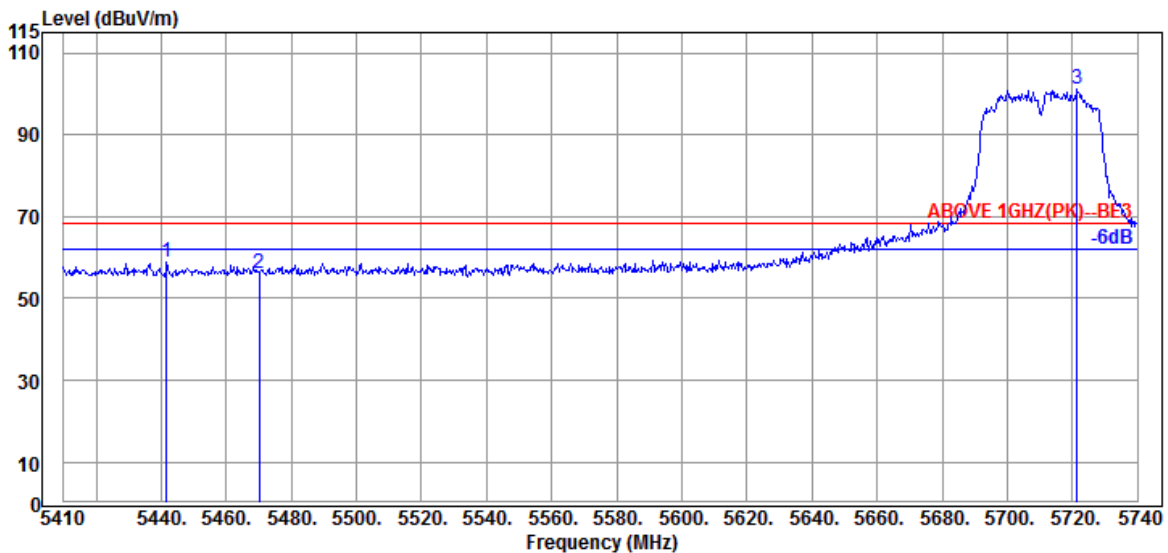


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5441.680	34.55	10.89	34.25	47.65	58.84	68.20	9.36	Peak
5470.060	34.47	10.91	34.24	45.12	56.26	68.20	11.94	Peak
@ 5721.520	34.53	11.05	34.32	89.74	101.00	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

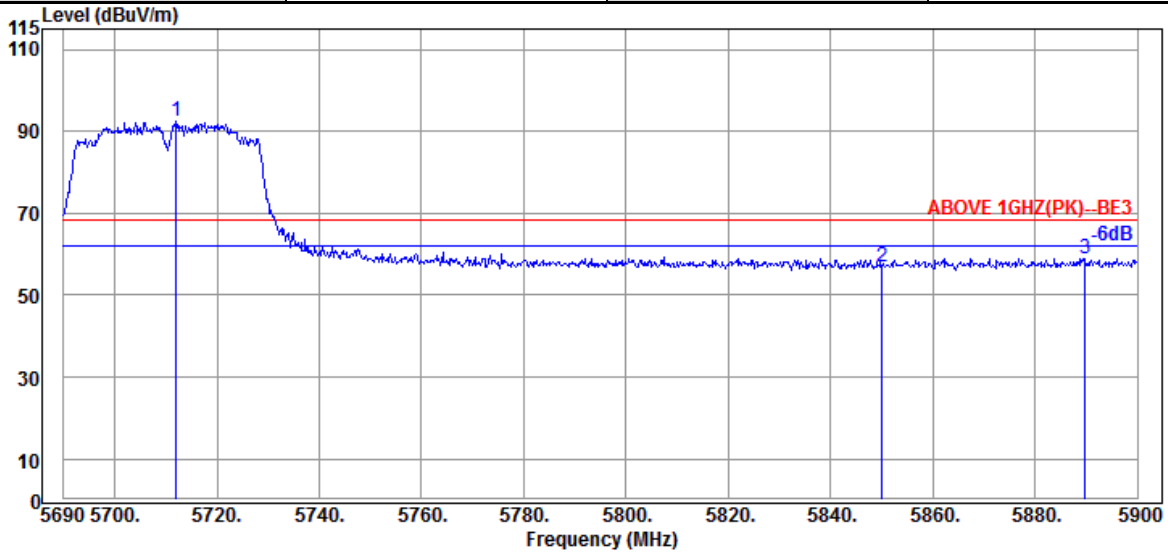

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.050	34.53	11.05	34.32	81.03	92.29	---	---	Peak
5850.020	35.10	11.10	34.38	45.27	57.09	68.20	11.11	Peak
5889.710	35.30	11.12	34.40	47.05	59.07	68.20	9.13	Peak

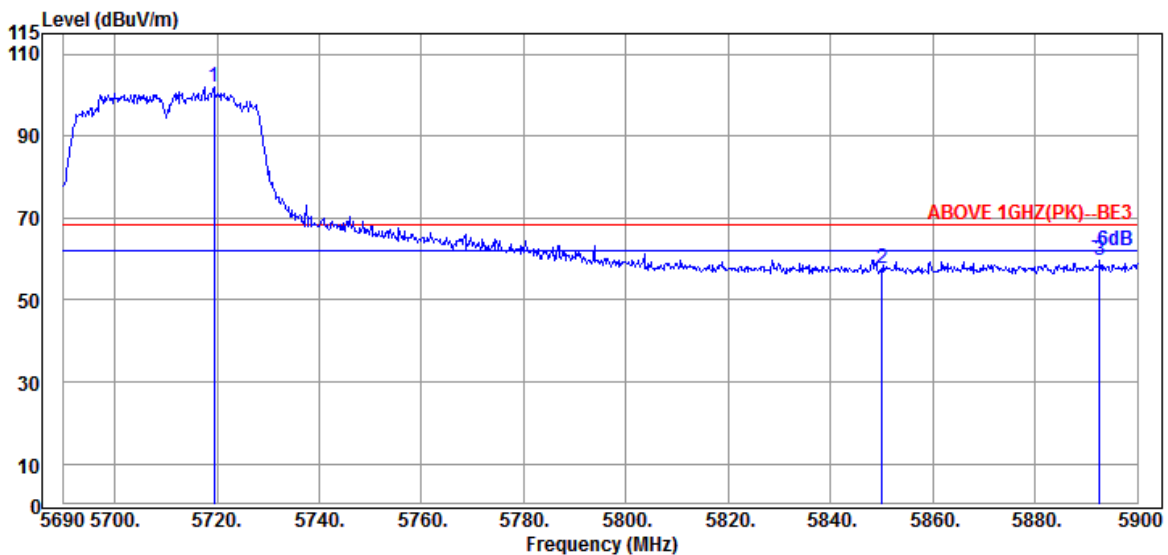


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.400	34.53	11.05	34.32	90.79	102.05	---	---	Peak
5850.020	35.10	11.10	34.38	45.86	57.68	68.20	10.52	Peak
5892.650	35.40	11.12	34.40	47.38	59.50	68.20	8.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

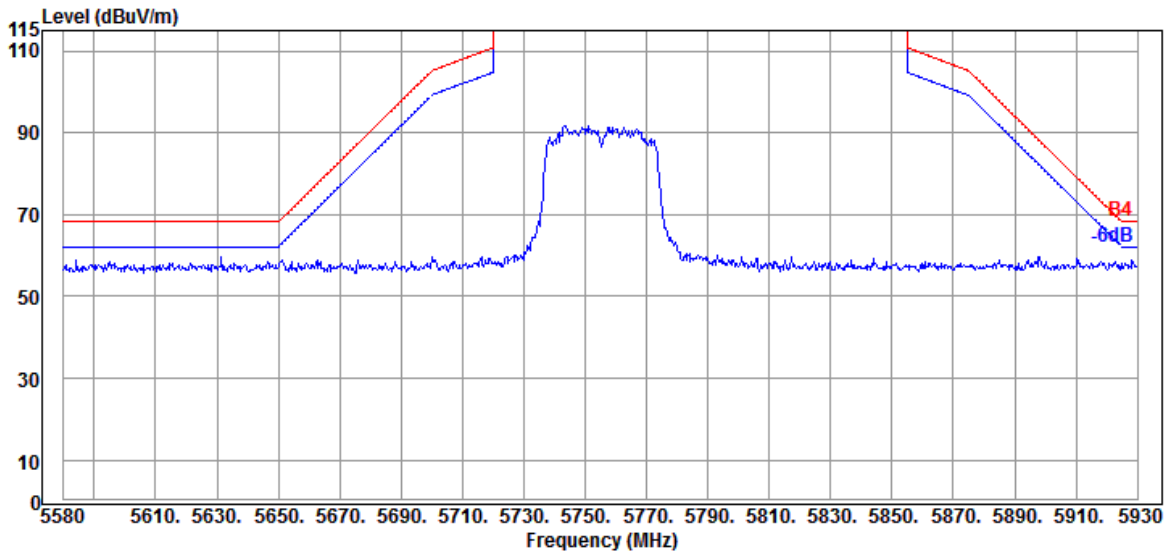


Antenna at Vertical Polarization

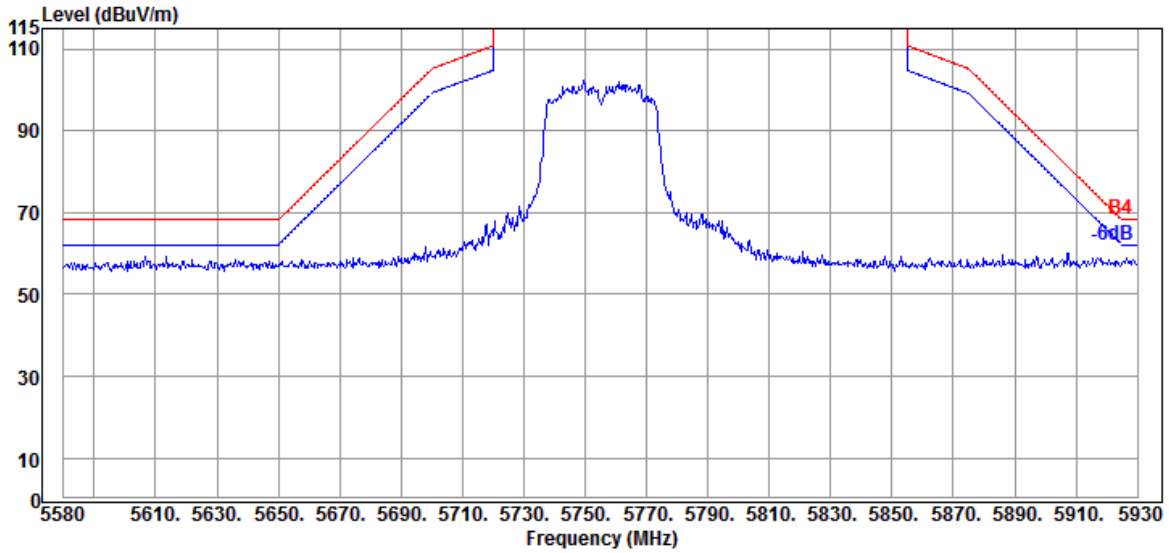


Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

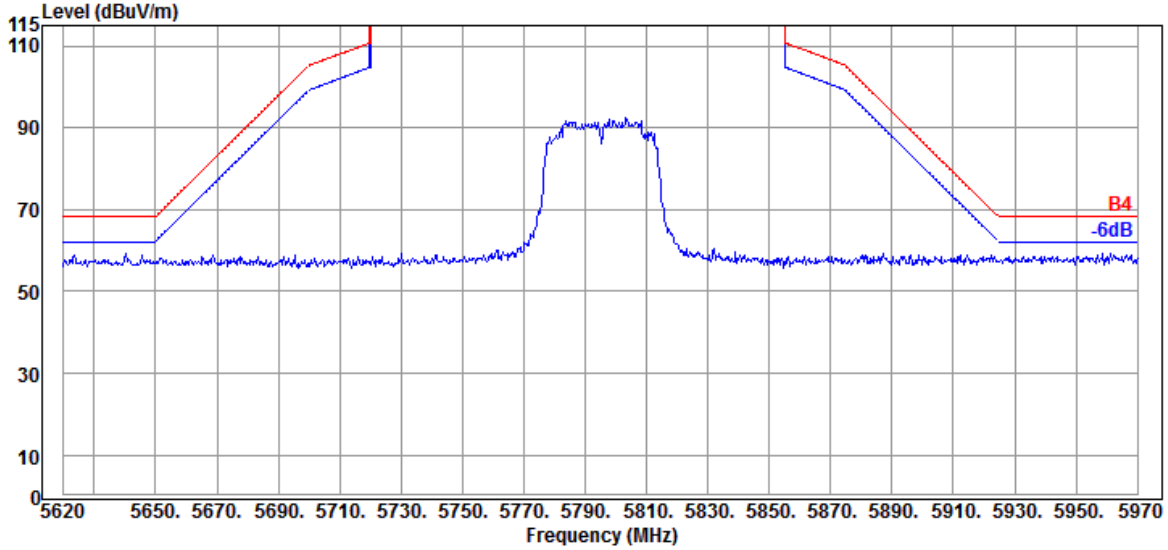

Antenna at Vertical Polarization

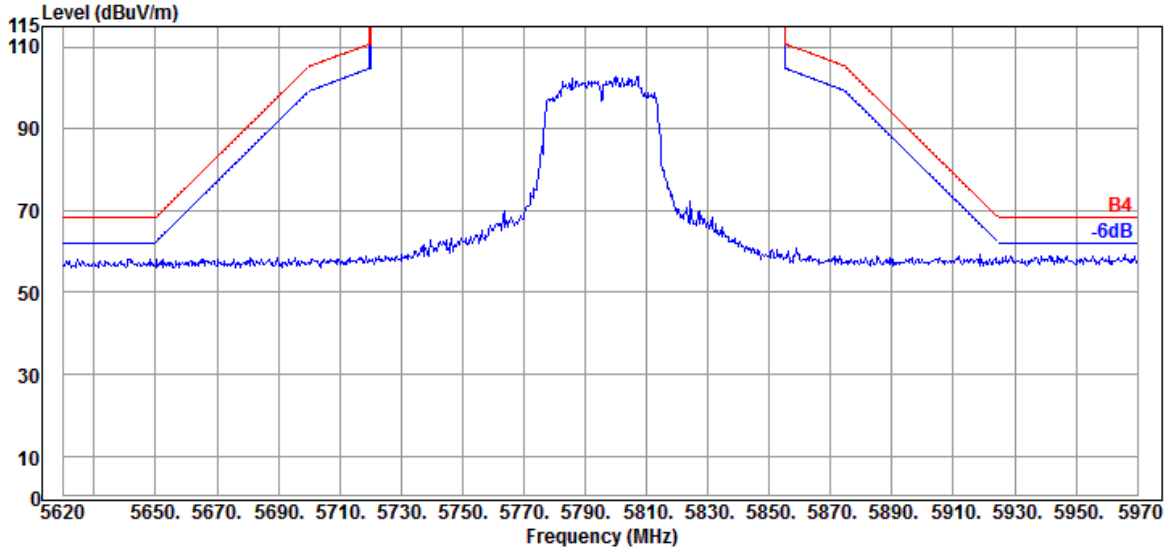


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

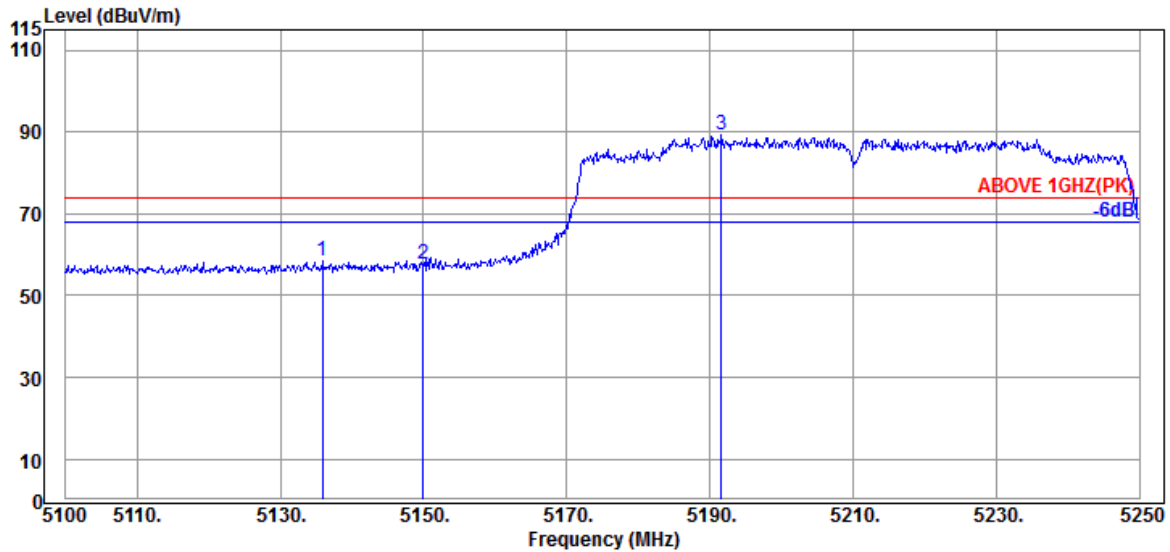

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.850	34.17	10.70	34.36	47.82	58.33	74.00	15.67	Peak
5149.950	34.20	10.70	34.35	47.12	57.67	74.00	16.33	Peak
@ 5191.650	34.20	10.74	34.34	78.57	89.17	---	---	Peak

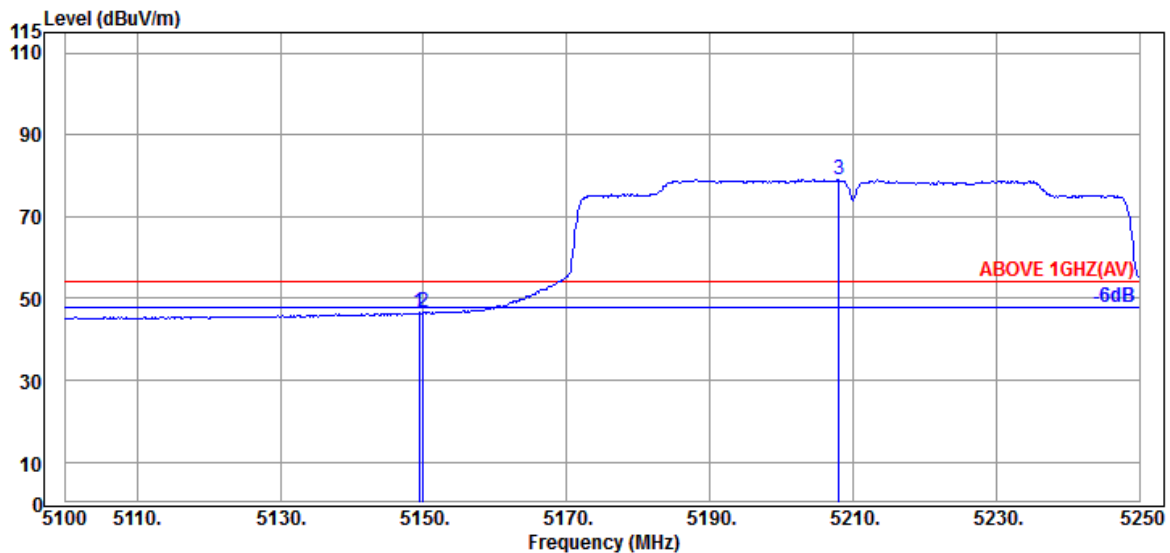


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.20	10.70	34.35	35.91	46.46	54.00	7.54	Average
5149.950	34.20	10.70	34.35	35.91	46.46	54.00	7.54	Average
@ 5208.000	34.25	10.74	34.33	68.40	79.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

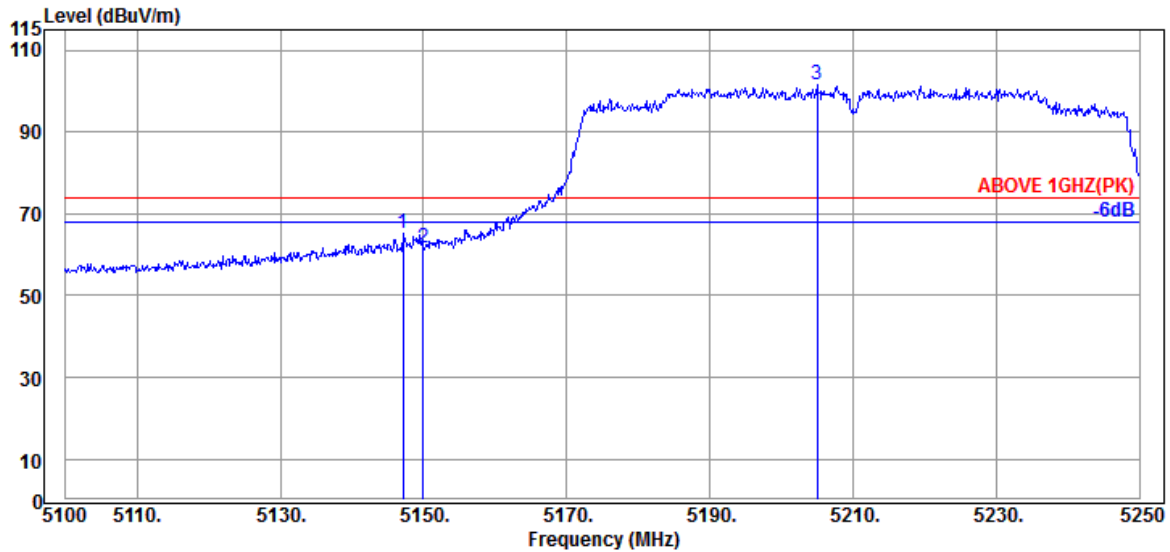

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.20	10.70	34.35	54.49	65.04	74.00	8.96	Peak
5149.950	34.20	10.70	34.35	51.21	61.76	74.00	12.24	Peak
@ 5205.000	34.25	10.74	34.33	90.82	101.48	---	---	Peak

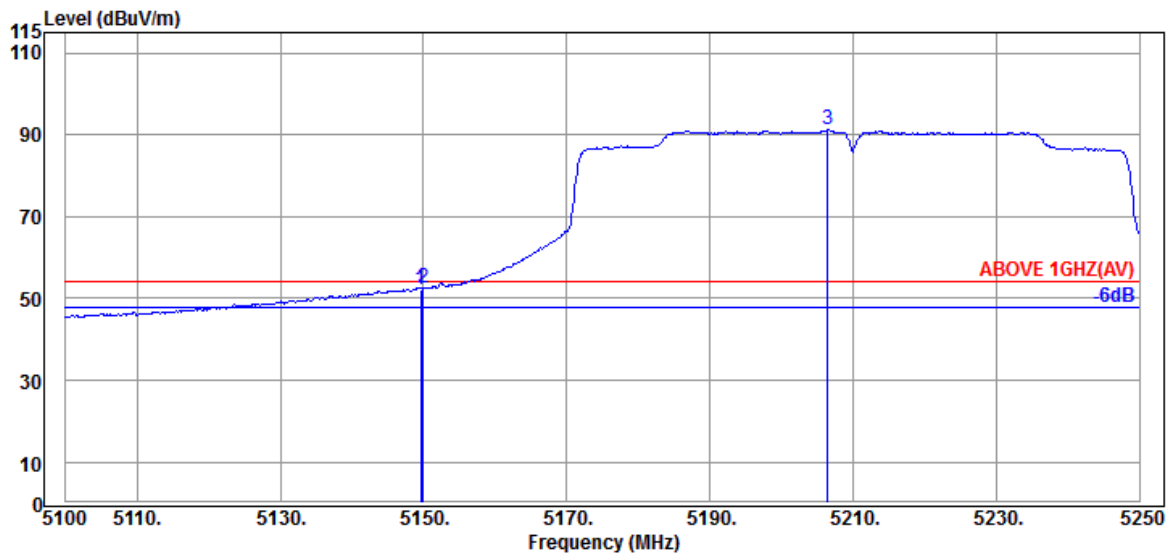


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	41.80	52.35	54.00	1.65	Average
5149.950	34.20	10.70	34.35	41.82	52.37	54.00	1.63	Average
@ 5206.500	34.25	10.74	34.33	80.66	91.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

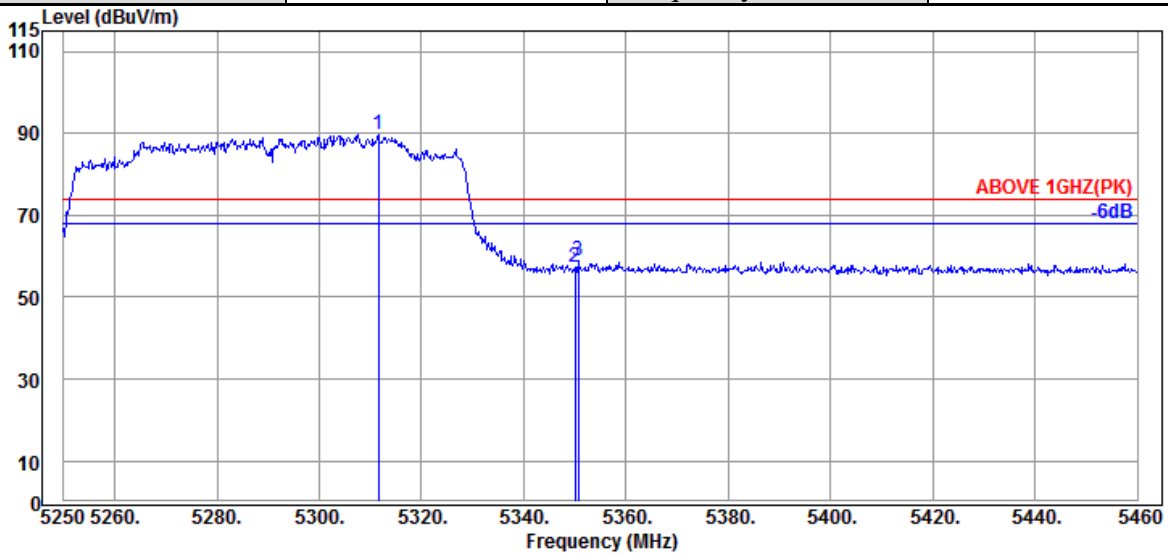

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.530	34.53	10.81	34.29	78.55	89.60	---	---	Peak
5349.960	34.60	10.83	34.27	46.03	57.19	74.00	16.81	Peak
5350.590	34.60	10.83	34.27	47.70	58.86	74.00	15.14	Peak

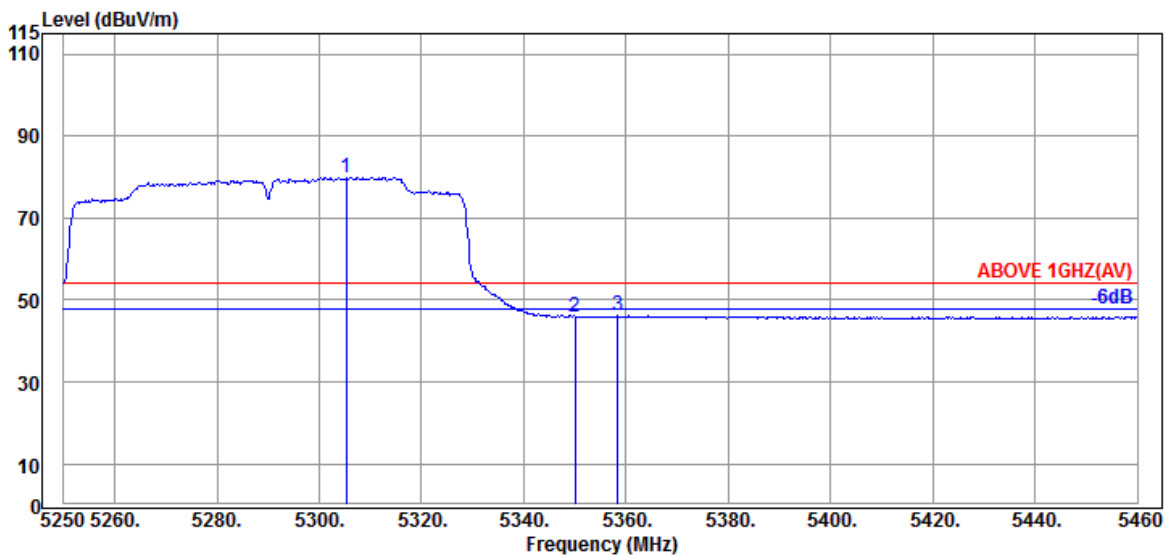


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.230	34.50	10.81	34.29	68.96	79.98	---	---	Average
5349.960	34.60	10.83	34.27	34.80	45.96	54.00	8.04	Average
5358.360	34.63	10.85	34.27	34.89	46.10	54.00	7.90	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

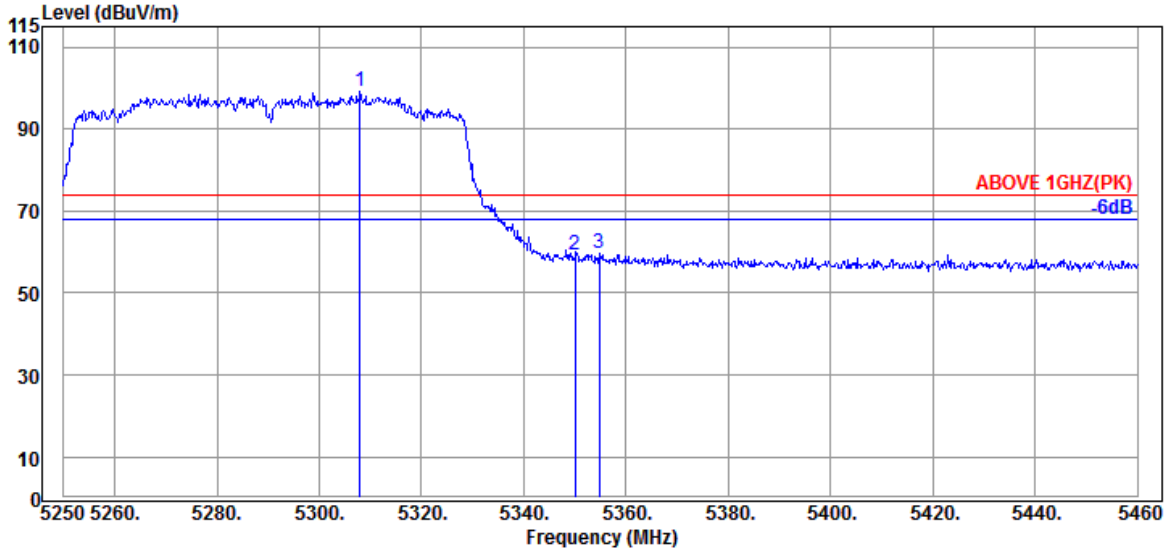

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.960	34.53	10.81	34.29	87.97	99.02	---	---	Peak
5349.960	34.60	10.83	34.27	48.29	59.45	74.00	14.55	Peak
5354.790	34.63	10.83	34.27	48.58	59.77	74.00	14.23	Peak

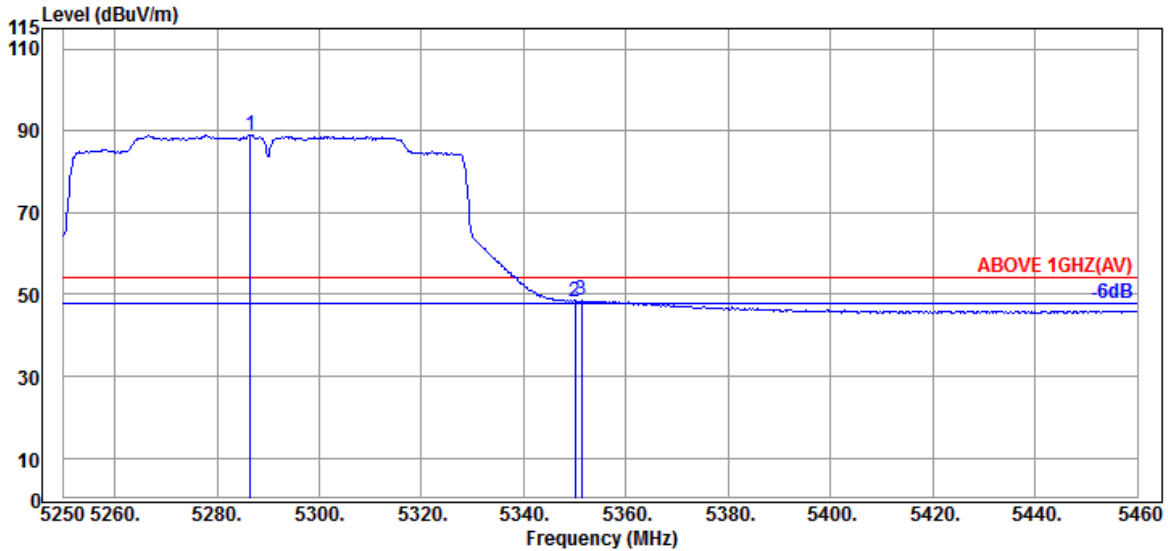


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.540	34.47	10.79	34.30	78.08	89.04	---	---	Average
5349.960	34.60	10.83	34.27	37.21	48.37	54.00	5.63	Average
5351.220	34.60	10.83	34.27	37.37	48.53	54.00	5.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

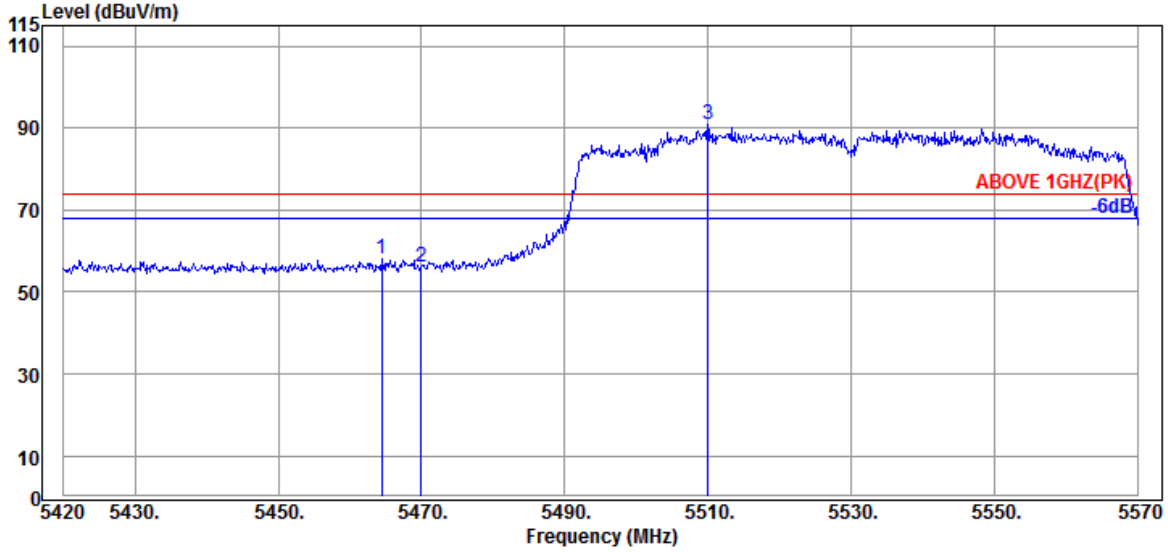

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.47	10.91	34.24	47.11	58.25	74.00	15.75	Peak
5469.950	34.47	10.91	34.24	44.82	55.96	74.00	18.04	Peak
@ 5510.000	34.40	10.93	34.24	79.91	91.00	---	---	Peak

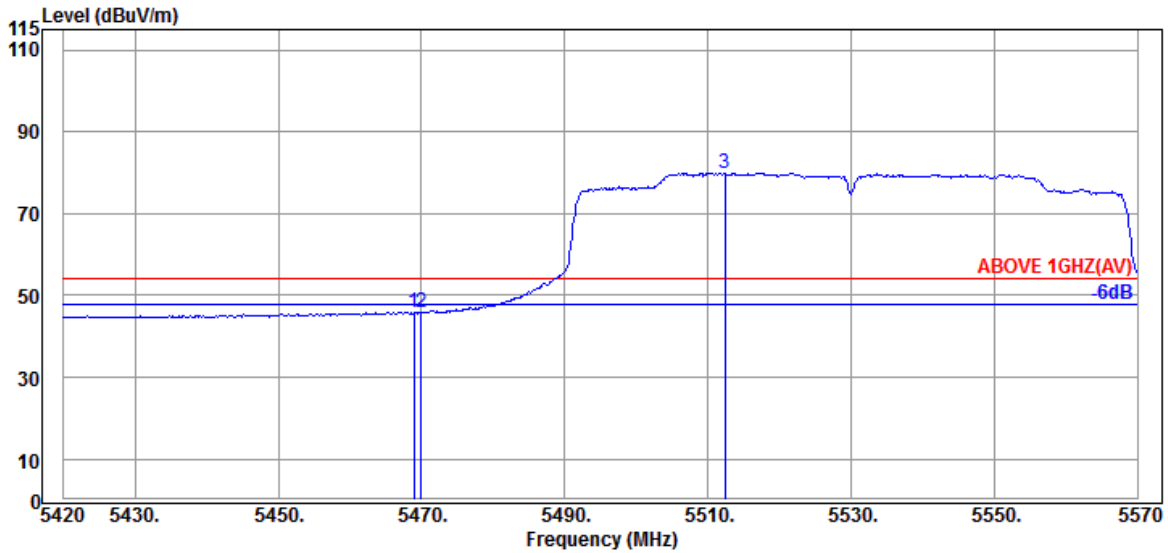


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	34.81	45.95	54.00	8.05	Average
5469.950	34.47	10.91	34.24	34.65	45.79	54.00	8.21	Average
@ 5512.400	34.37	10.93	34.24	68.90	79.96	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

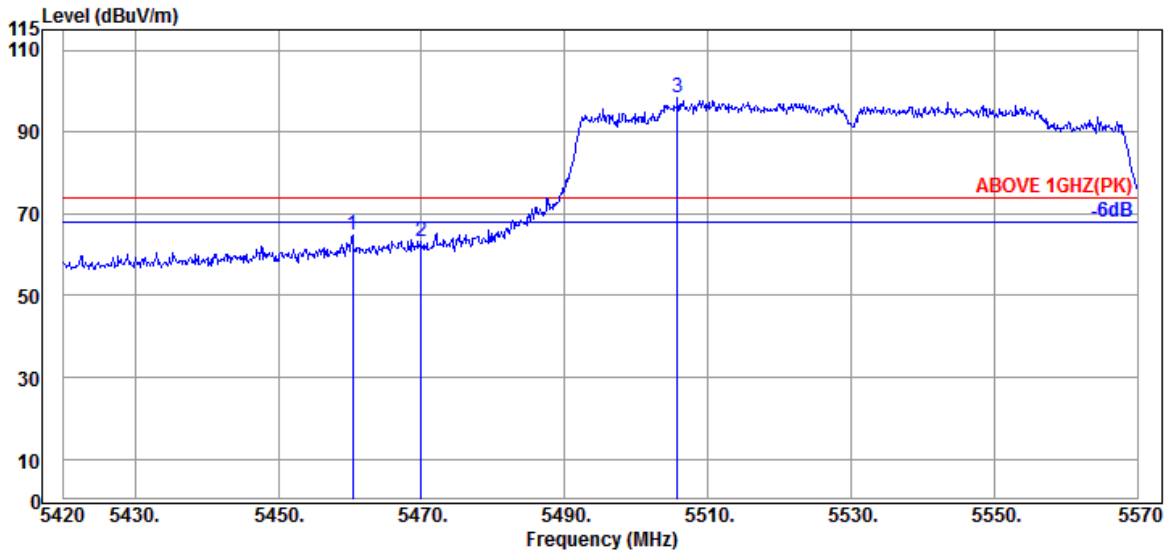

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.350	34.50	10.91	34.24	53.50	64.67	74.00	9.33	Peak
5469.950	34.47	10.91	34.24	52.23	63.37	74.00	10.63	Peak
@ 5505.800	34.40	10.93	34.24	87.31	98.40	---	---	Peak

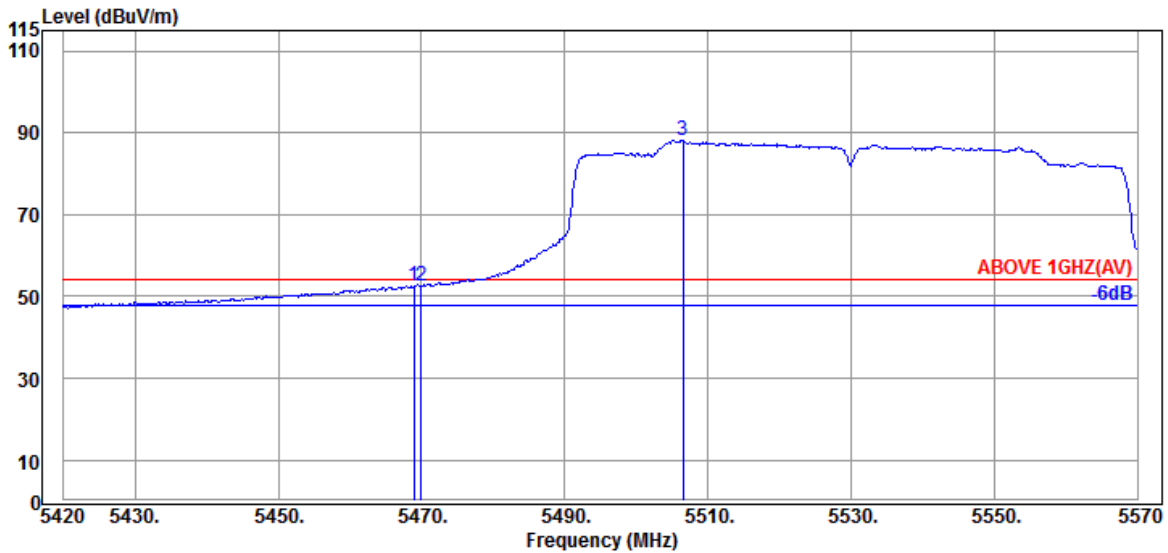


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	41.28	52.42	54.00	1.58	Average
5469.950	34.47	10.91	34.24	41.53	52.67	54.00	1.33	Average
@ 5506.550	34.40	10.93	34.24	77.22	88.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

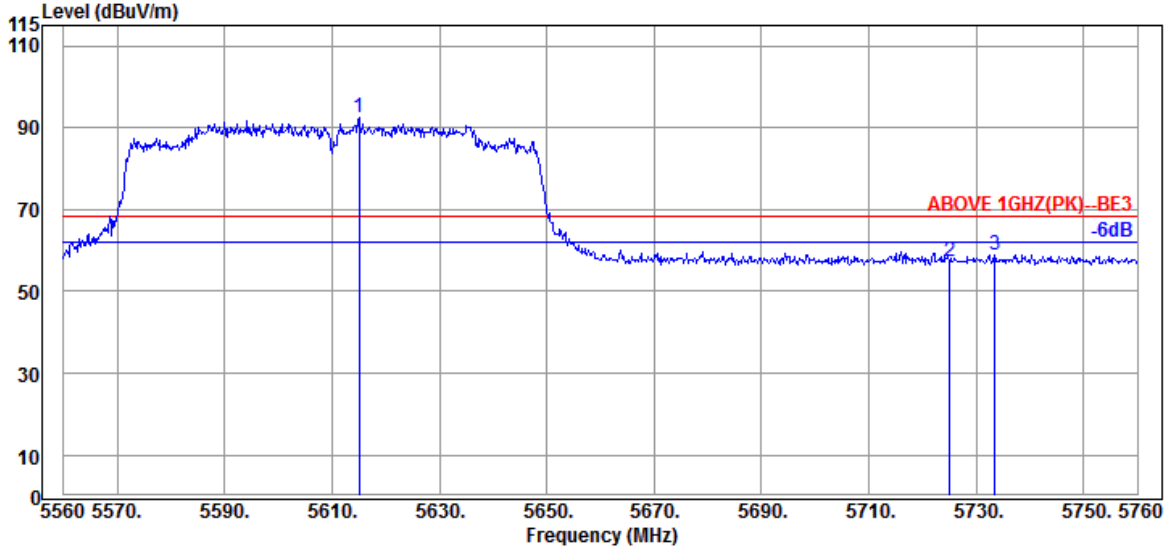

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5615.000	34.40	10.99	34.28	81.44	92.55	---	---	Peak
5725.000	34.67	11.05	34.32	45.75	57.15	68.20	11.05	Peak
5615.000	34.40	10.99	34.28	81.44	92.55	68.20	-24.35	Peak

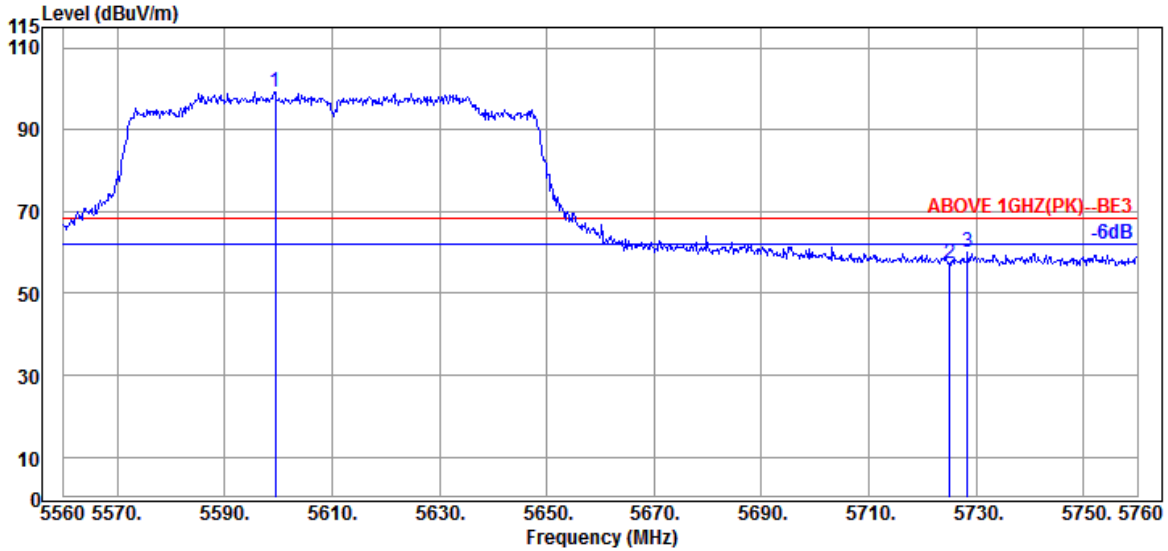


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.400	34.40	10.97	34.27	88.18	99.28	---	---	Peak
5725.000	34.67	11.05	34.32	45.90	57.30	68.20	10.90	Peak
5728.400	34.67	11.05	34.32	48.72	60.12	68.20	8.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

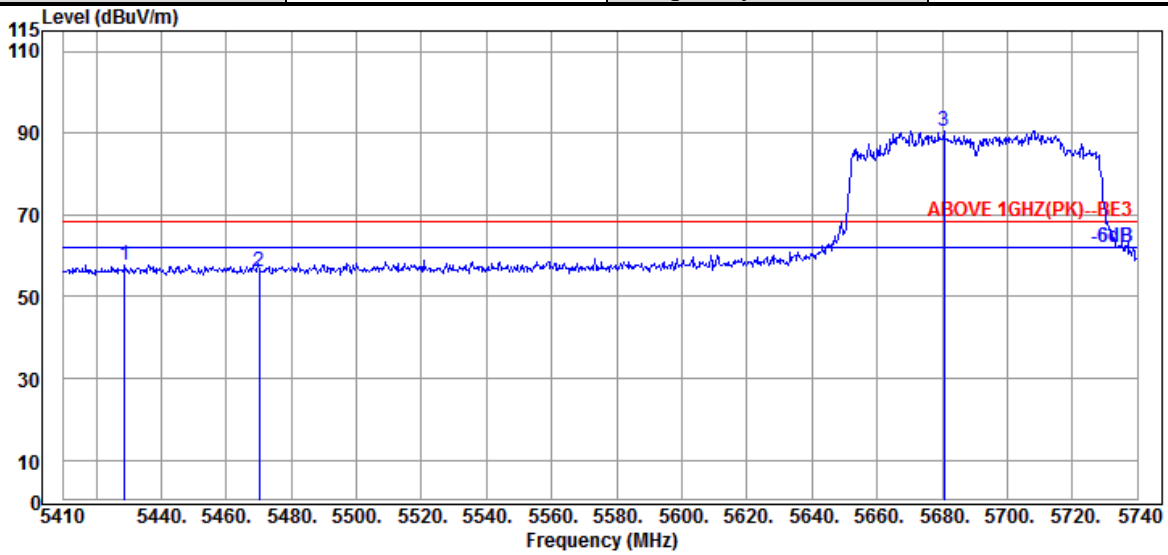

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.810	34.60	10.89	34.25	46.33	57.57	68.20	10.63	Peak
5470.060	34.47	10.91	34.24	44.95	56.09	68.20	12.11	Peak
@ 5680.600	34.40	11.03	34.31	79.53	90.65	---	---	Peak

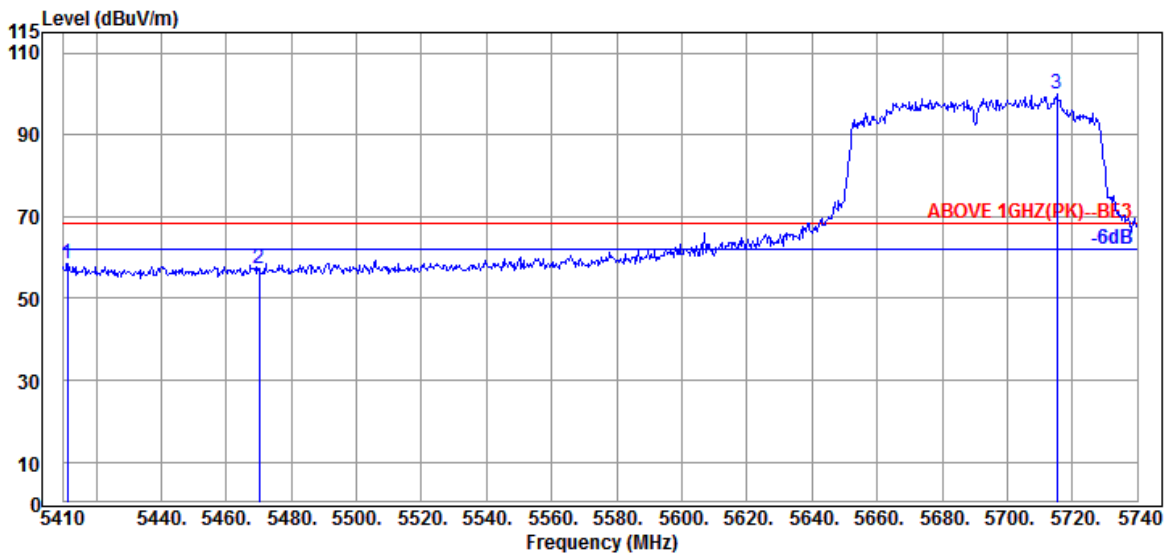


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.320	34.65	10.87	34.26	47.28	58.54	68.20	9.66	Peak
5470.060	34.47	10.91	34.24	45.99	57.13	68.20	11.07	Peak
@ 5715.250	34.53	11.05	34.32	88.78	100.04	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

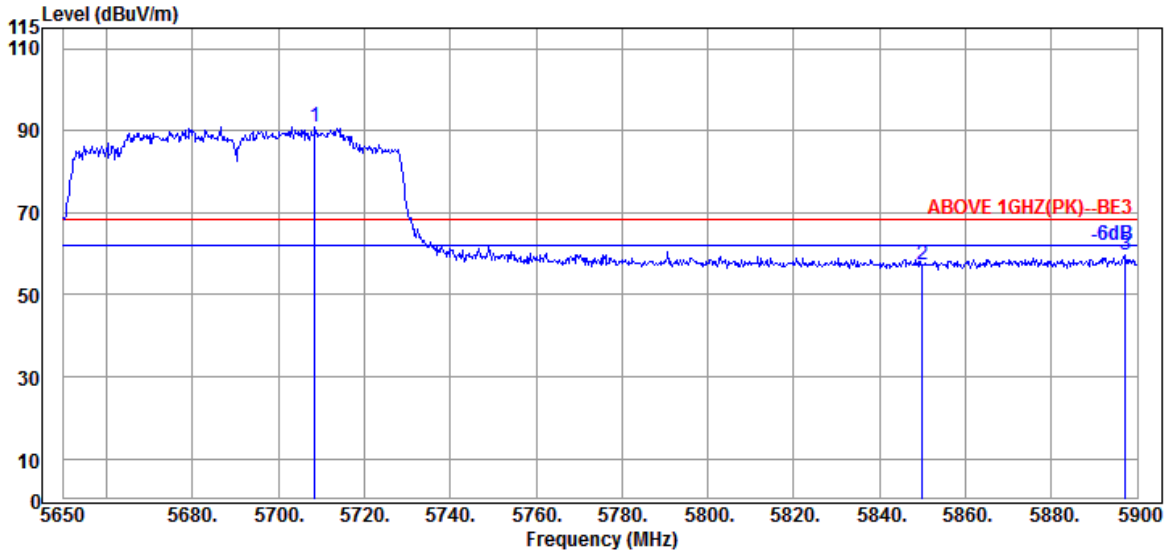

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.500	34.53	11.03	34.32	79.58	90.82	---	---	Peak
5850.000	35.10	11.10	34.38	45.46	57.28	68.20	10.92	Peak
5897.250	35.40	11.14	34.40	47.60	59.74	68.20	8.46	Peak

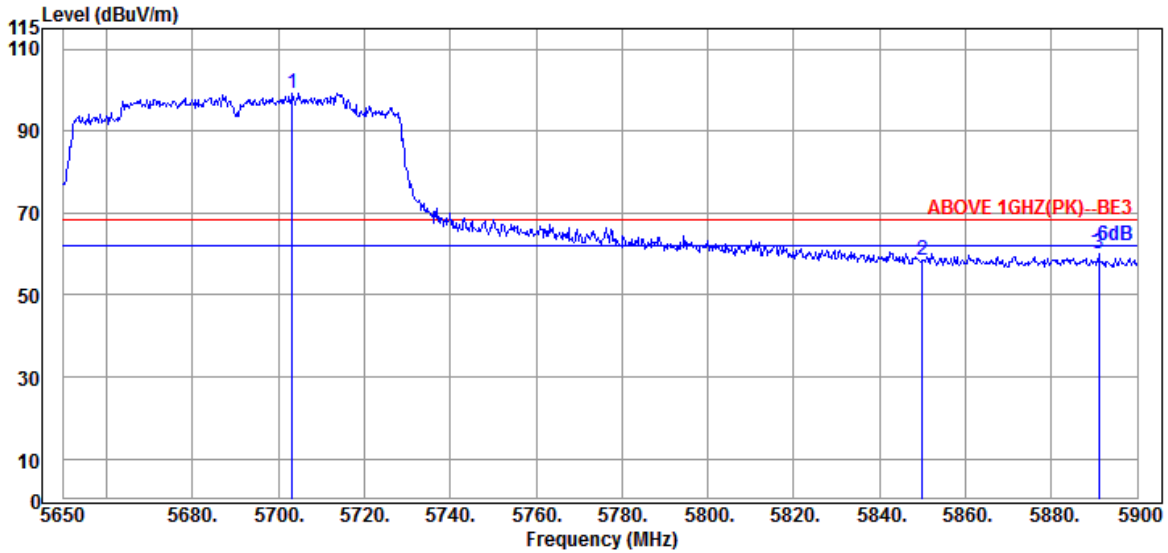


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.250	34.40	11.03	34.31	88.10	99.22	---	---	Peak
5850.000	35.10	11.10	34.38	46.83	58.65	68.20	9.55	Peak
5891.000	35.40	11.12	34.40	47.87	59.99	68.20	8.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

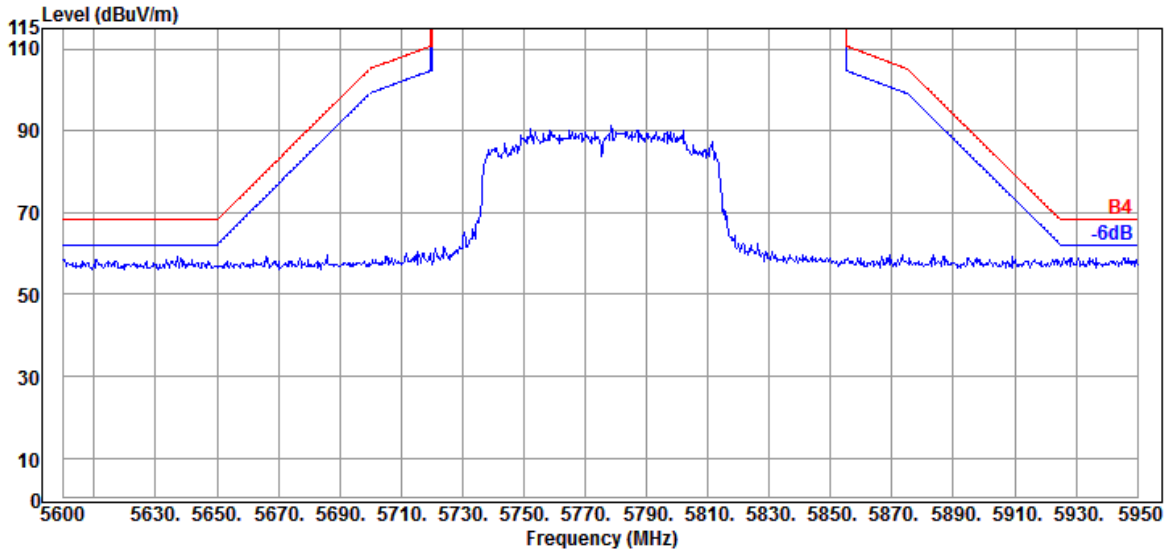

Antenna at Vertical Polarization

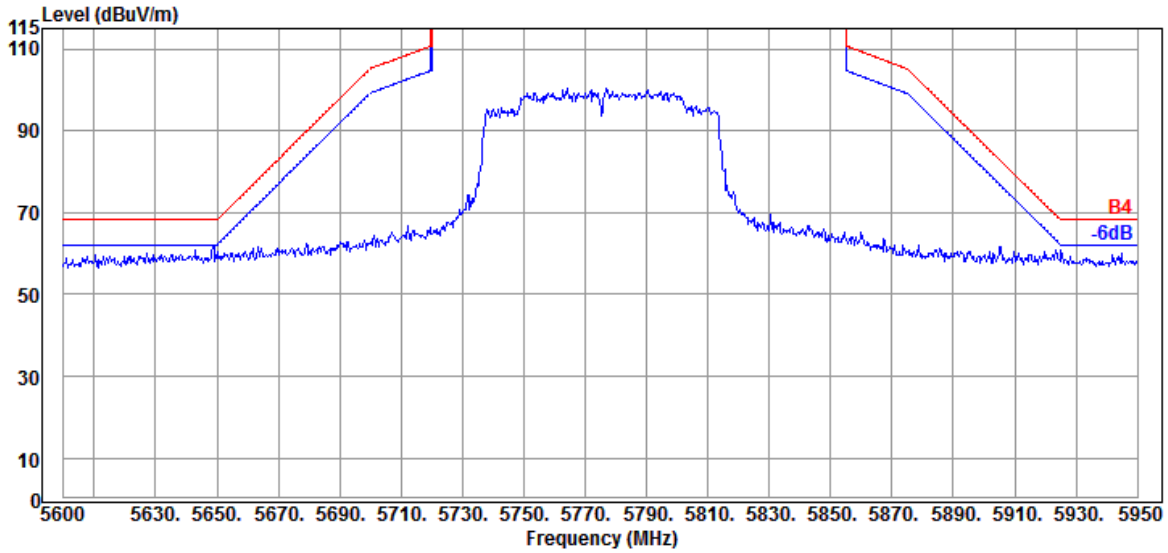


Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

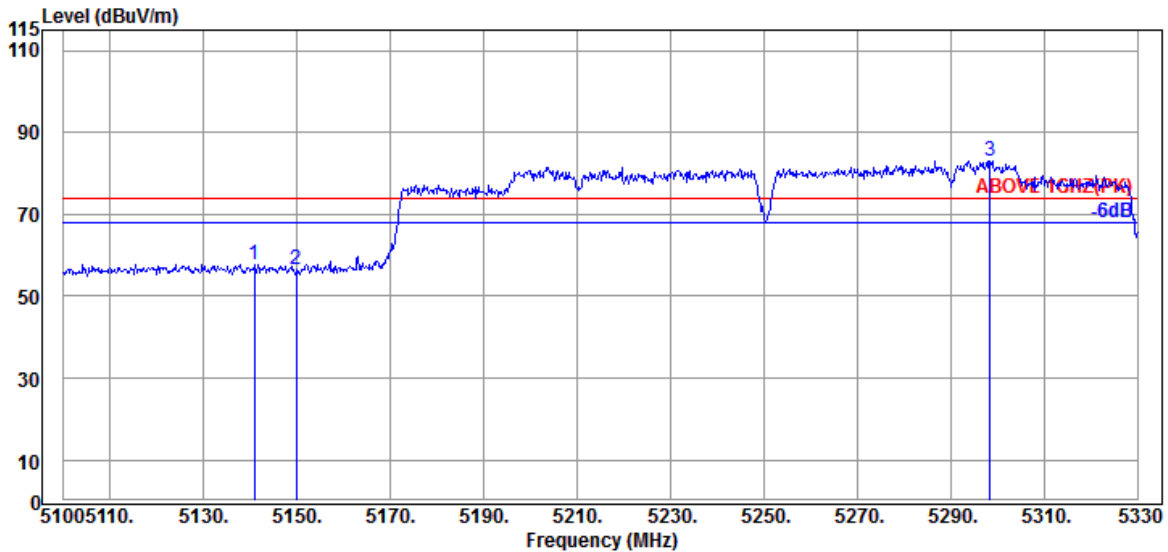

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.940	34.17	10.70	34.36	47.36	57.87	74.00	16.13	Peak
5149.910	34.20	10.70	34.35	46.11	56.66	74.00	17.34	Peak
@ 5298.490	34.50	10.81	34.29	72.14	83.16	---	---	Peak

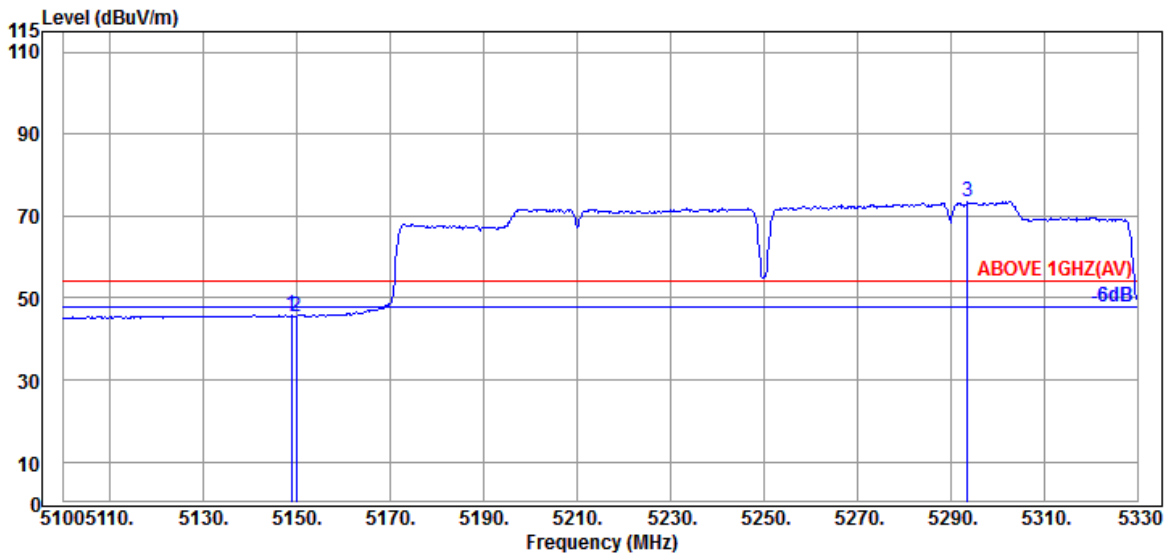


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.760	34.20	10.70	34.35	35.15	45.70	54.00	8.30	Average
5149.910	34.20	10.70	34.35	35.07	45.62	54.00	8.38	Average
@ 5293.660	34.50	10.81	34.30	62.46	73.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

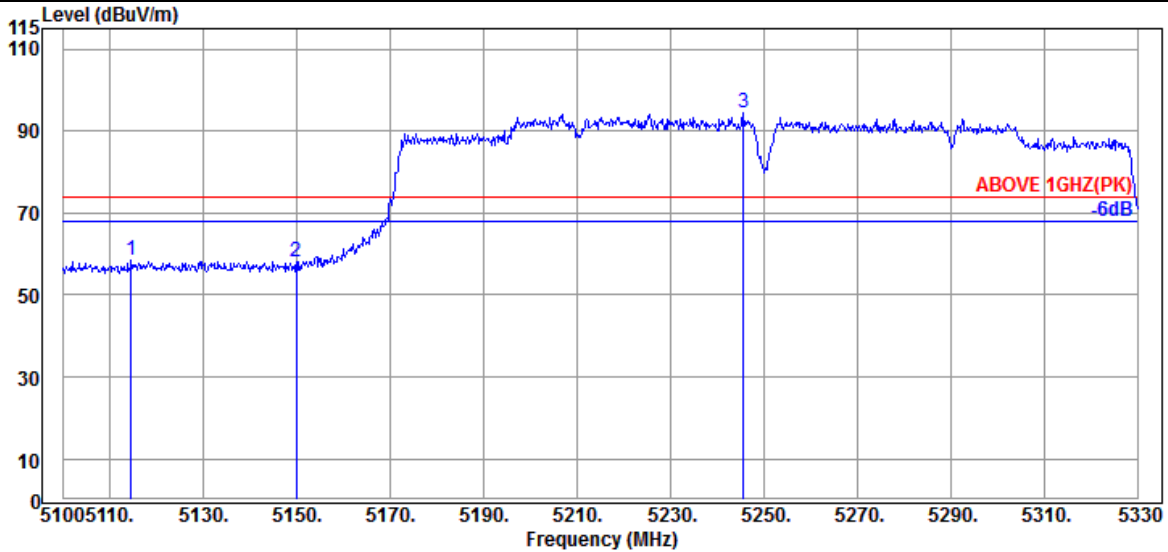

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.490	34.13	10.68	34.36	48.00	58.45	74.00	15.55	Peak
5149.910	34.20	10.70	34.35	47.35	57.90	74.00	16.10	Peak
@ 5245.590	34.35	10.76	34.32	83.58	94.37	---	---	Peak

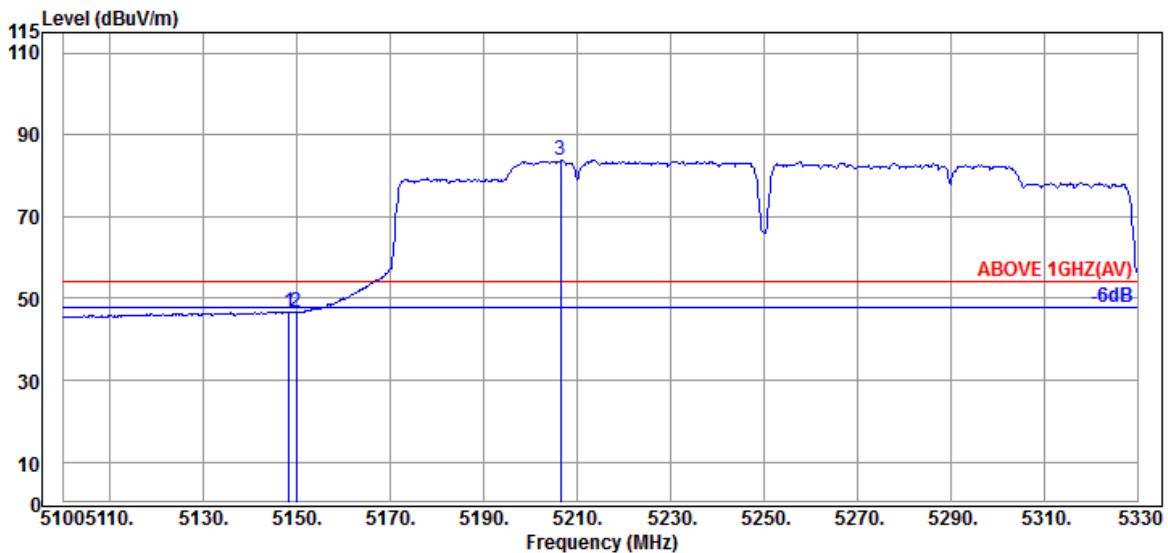


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.20	10.70	34.35	36.21	46.76	54.00	7.24	Average
5149.910	34.20	10.70	34.35	36.14	46.69	54.00	7.31	Average
@ 5206.490	34.25	10.74	34.33	73.08	83.74	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

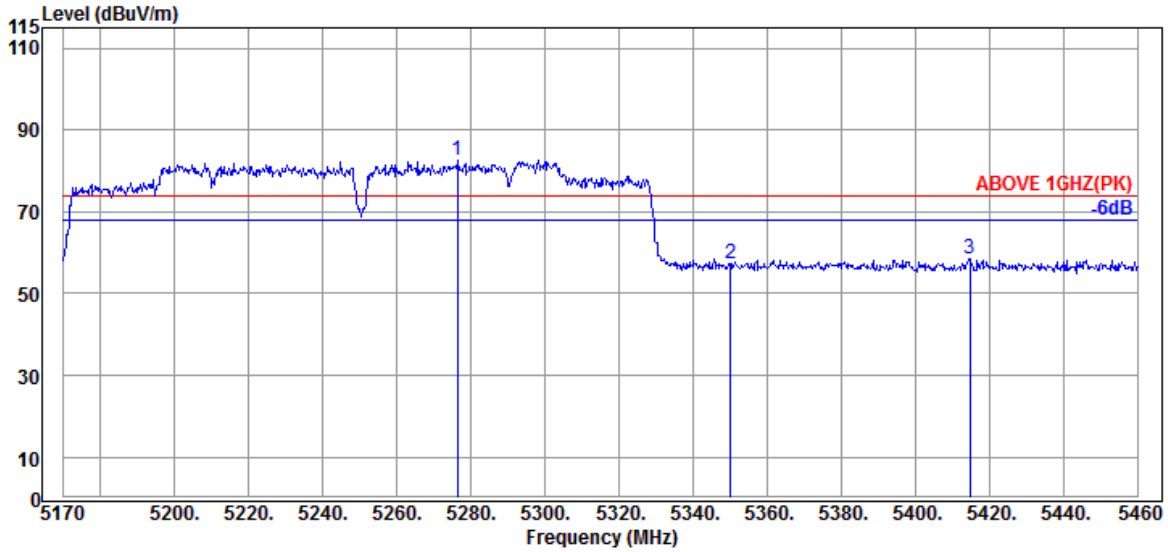

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.430	34.43	10.79	34.30	71.74	82.66	---	---	Peak
5350.090	34.60	10.83	34.27	46.12	57.28	74.00	16.72	Peak
5414.760	34.65	10.87	34.26	47.41	58.67	74.00	15.33	Peak

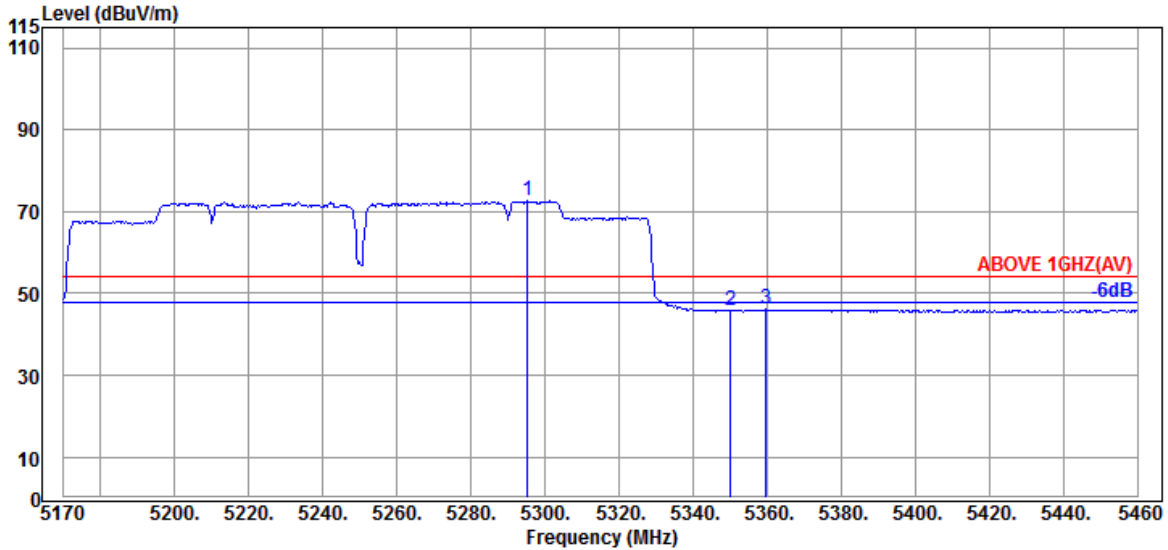


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.280	34.50	10.81	34.30	61.53	72.54	---	---	Average
5350.090	34.60	10.83	34.27	34.58	45.74	54.00	8.26	Average
5359.660	34.63	10.85	34.27	34.83	46.04	54.00	7.96	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

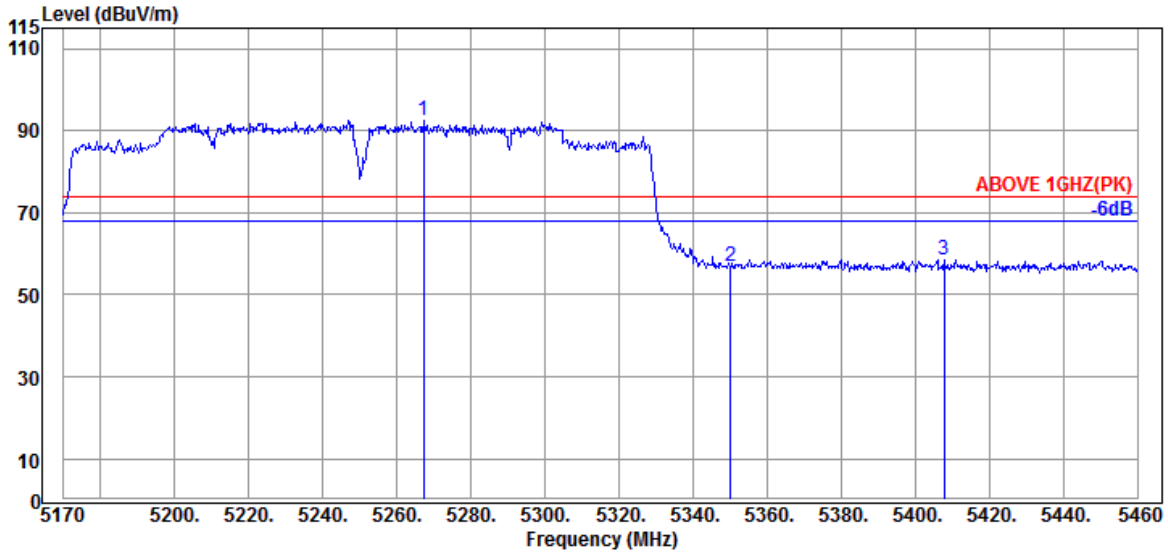

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.150	34.43	10.79	34.31	81.50	92.41	---	---	Peak
5350.090	34.60	10.83	34.27	45.57	56.73	74.00	17.27	Peak
5407.800	34.65	10.87	34.26	47.39	58.65	74.00	15.35	Peak

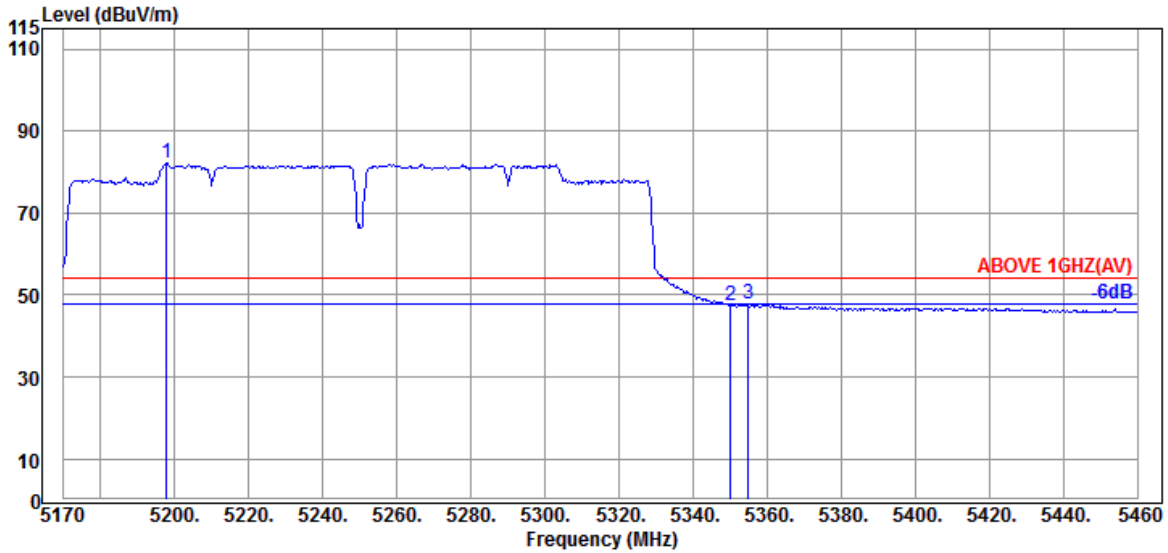


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.20	10.74	34.33	71.63	82.24	---	---	Average
5350.090	34.60	10.83	34.27	36.34	47.50	54.00	6.50	Average
5355.020	34.63	10.83	34.27	36.46	47.65	54.00	6.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

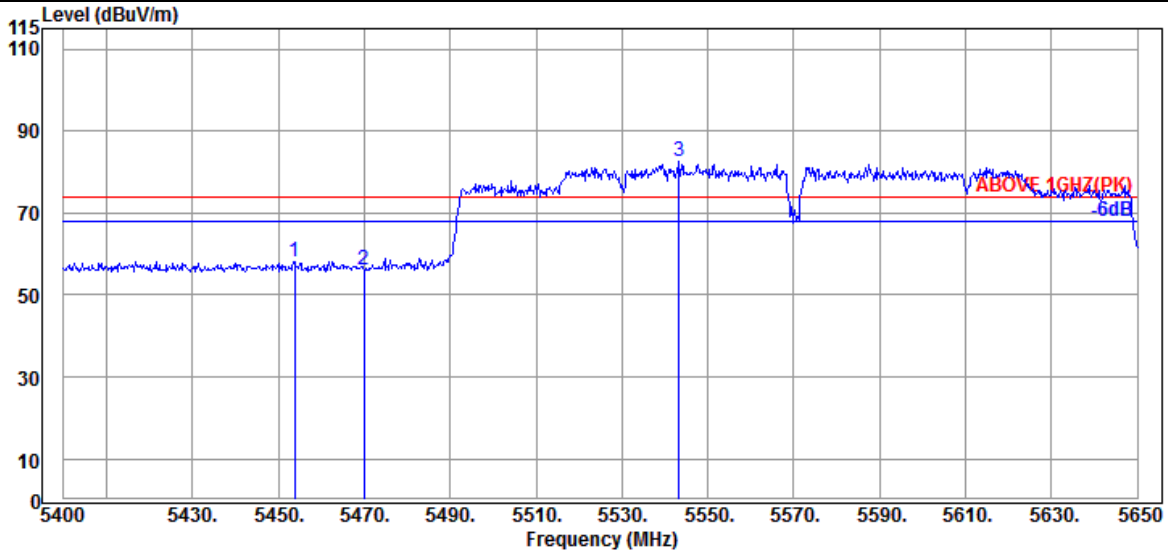

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.750	34.50	10.89	34.24	47.13	58.28	74.00	15.72	Peak
5470.000	34.47	10.91	34.24	45.01	56.15	74.00	17.85	Peak
@ 5543.250	34.30	10.95	34.25	71.72	82.72	---	---	Peak

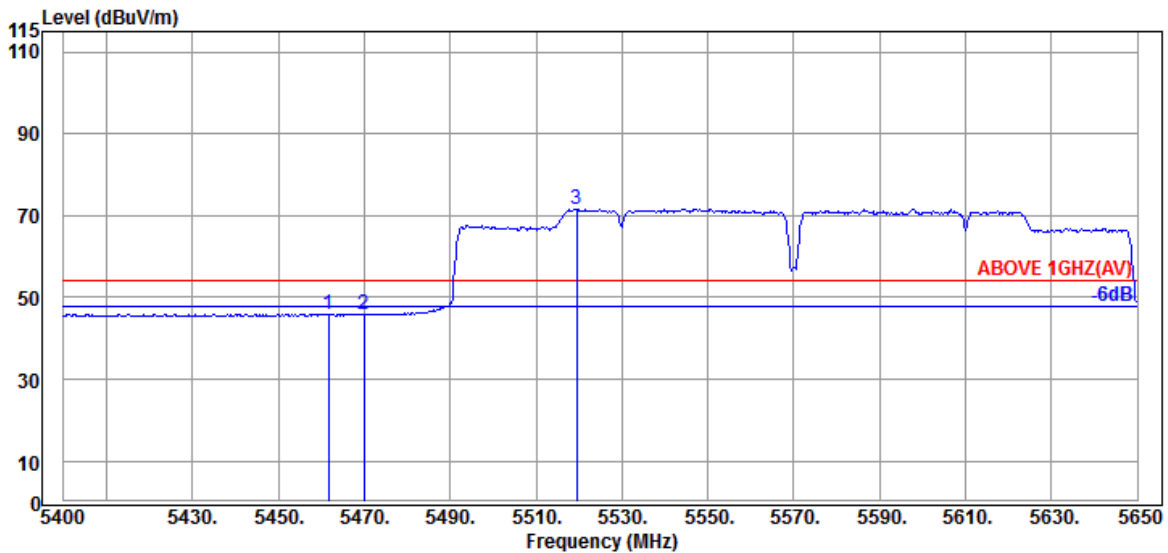


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.750	34.50	10.91	34.24	34.78	45.95	54.00	8.05	Average
5470.000	34.47	10.91	34.24	34.61	45.75	54.00	8.25	Average
@ 5519.500	34.37	10.93	34.24	60.59	71.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

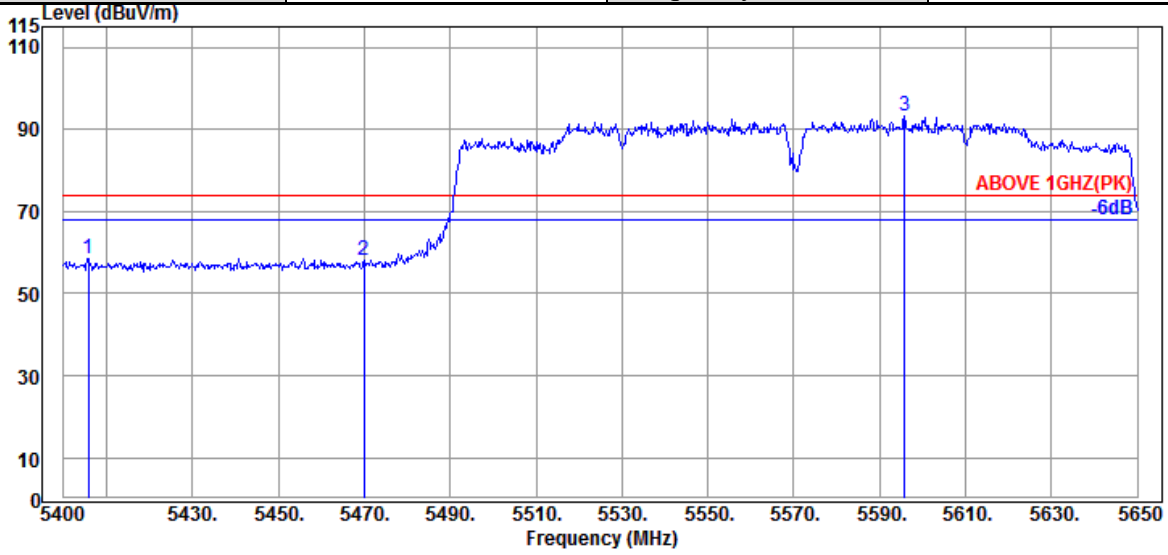

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5405.750	34.65	10.87	34.26	47.40	58.66	74.00	15.34	Peak
5470.000	34.47	10.91	34.24	46.82	57.96	74.00	16.04	Peak
@ 5595.750	34.40	10.97	34.27	82.15	93.25	---	---	Peak

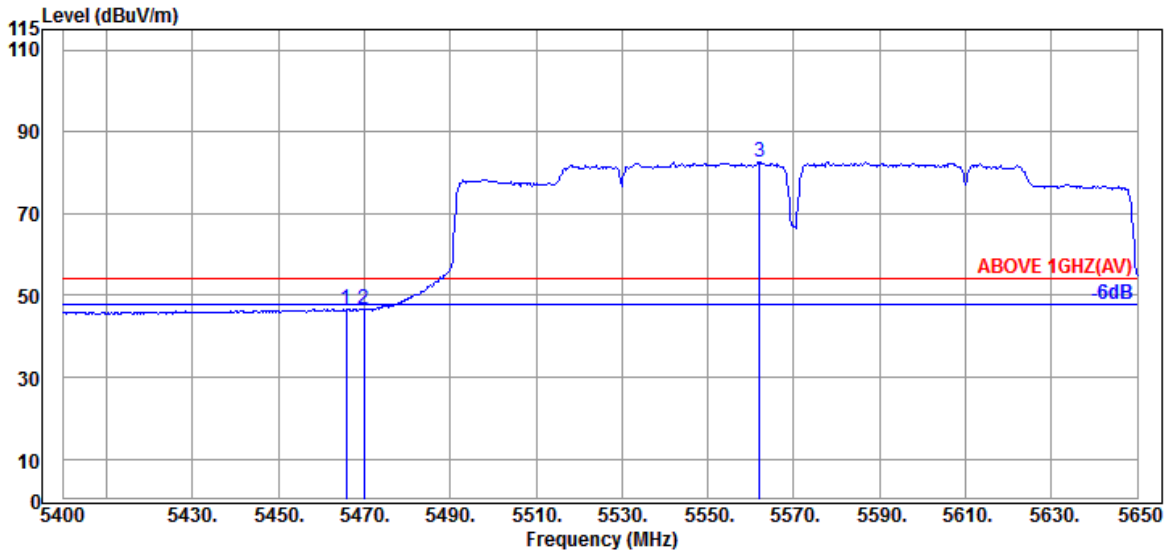


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.47	10.91	34.24	35.43	46.57	54.00	7.43	Average
5470.000	34.47	10.91	34.24	35.44	46.58	54.00	7.42	Average
@ 5562.000	34.33	10.95	34.26	71.58	82.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

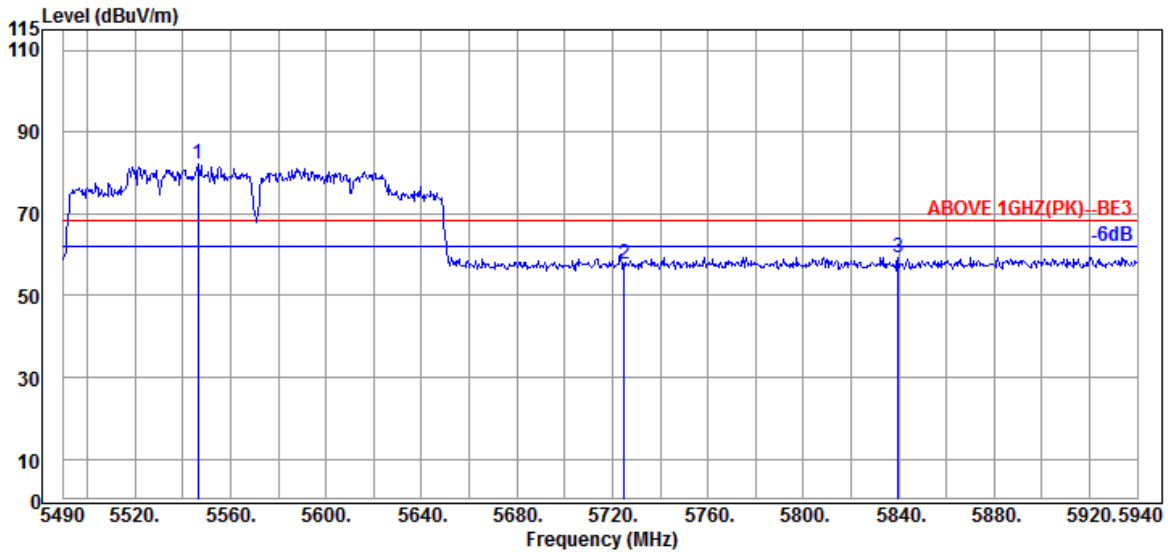

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5546.250	34.30	10.95	34.25	71.03	82.03	---	---	Peak
5724.900	34.67	11.05	34.32	46.23	57.63	68.20	10.57	Peak
5839.650	35.10	11.10	34.38	47.57	59.39	68.20	8.81	Peak

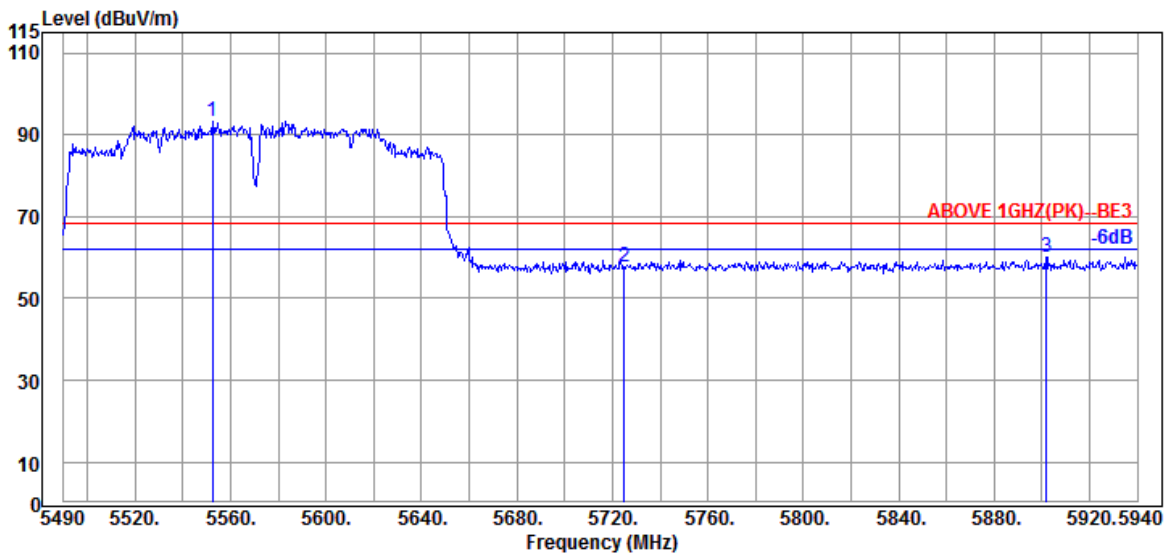


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5552.550	34.30	10.95	34.26	82.25	93.24	---	---	Peak
5724.900	34.67	11.05	34.32	46.23	57.63	68.20	10.57	Peak
5901.750	35.40	11.14	34.40	47.98	60.12	68.20	8.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

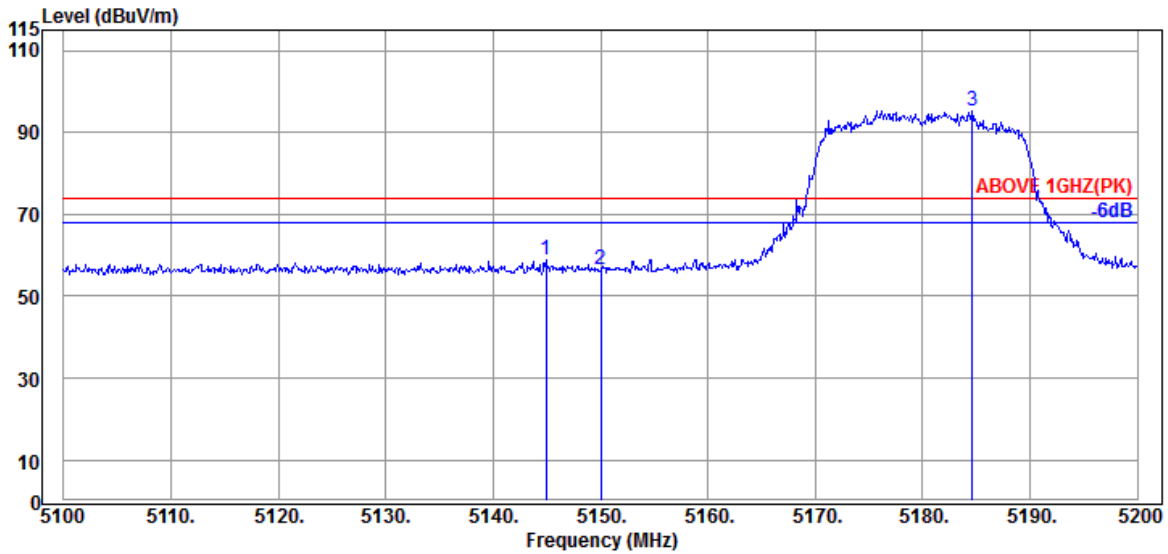

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.900	34.20	10.70	34.35	48.37	58.92	74.00	15.08	Peak
5150.000	34.20	10.70	34.35	46.04	56.59	74.00	17.41	Peak
@ 5184.600	34.20	10.72	34.34	84.68	95.26	---	---	Peak

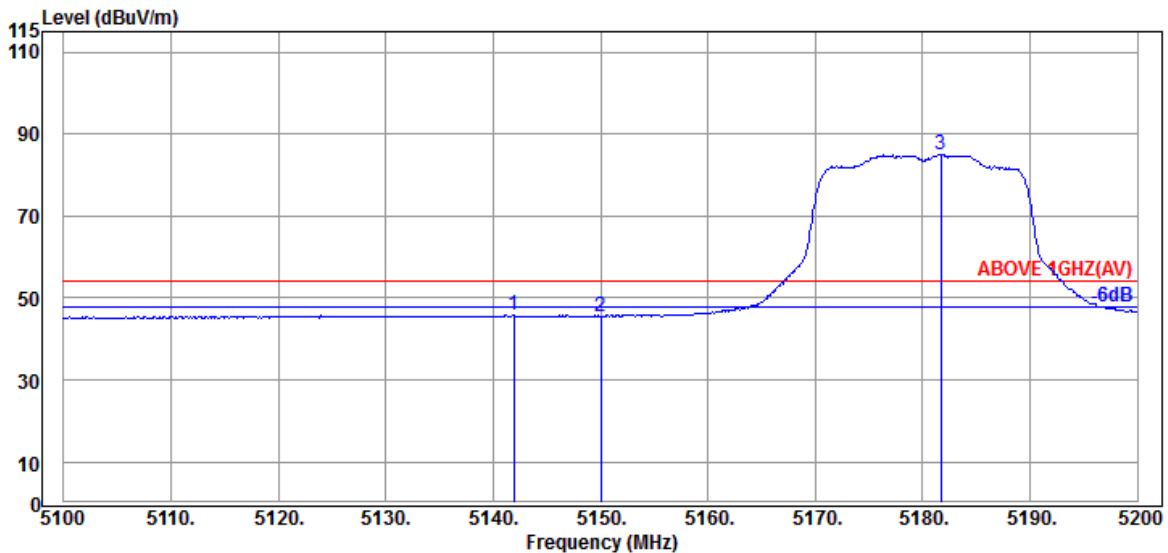


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	34.20	10.70	34.36	35.28	45.82	54.00	8.18	Average
5150.000	34.20	10.70	34.35	35.05	45.60	54.00	8.40	Average
@ 5181.700	34.20	10.72	34.34	74.38	84.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

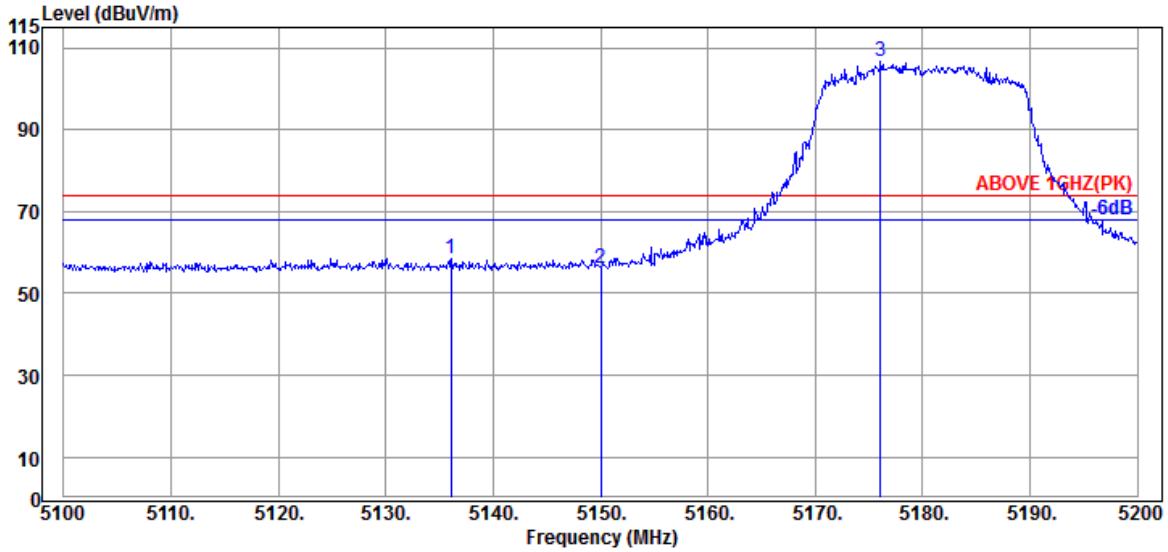

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.100	34.17	10.70	34.36	47.89	58.40	74.00	15.60	Peak
5150.000	34.20	10.70	34.35	45.58	56.13	74.00	17.87	Peak
@ 5176.100	34.20	10.72	34.34	96.10	106.68	---	---	Peak

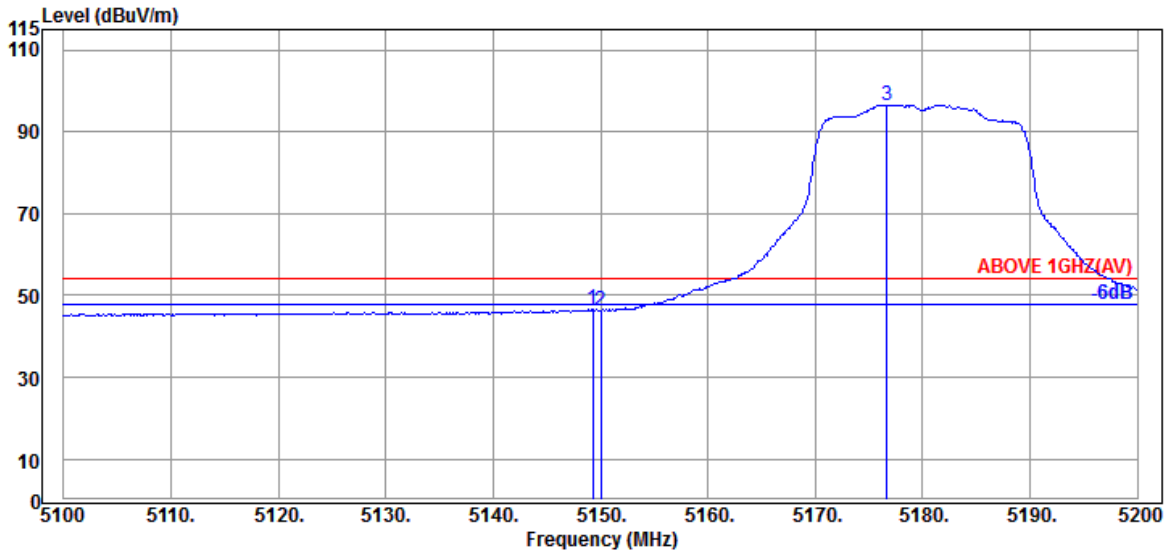


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.20	10.70	34.35	35.96	46.51	54.00	7.49	Average
5150.000	34.20	10.70	34.35	35.61	46.16	54.00	7.84	Average
@ 5176.700	34.20	10.72	34.34	86.03	96.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

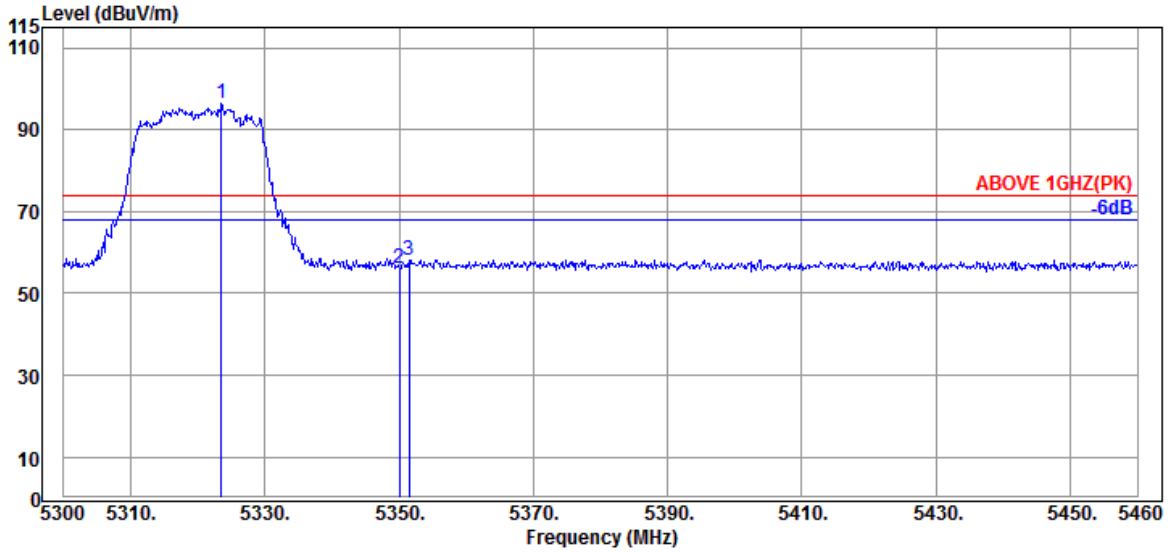

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	34.57	10.83	34.28	85.43	96.55	---	---	Peak
5350.080	34.60	10.83	34.27	45.00	56.16	74.00	17.84	Peak
5351.520	34.60	10.83	34.27	47.03	58.19	74.00	15.81	Peak

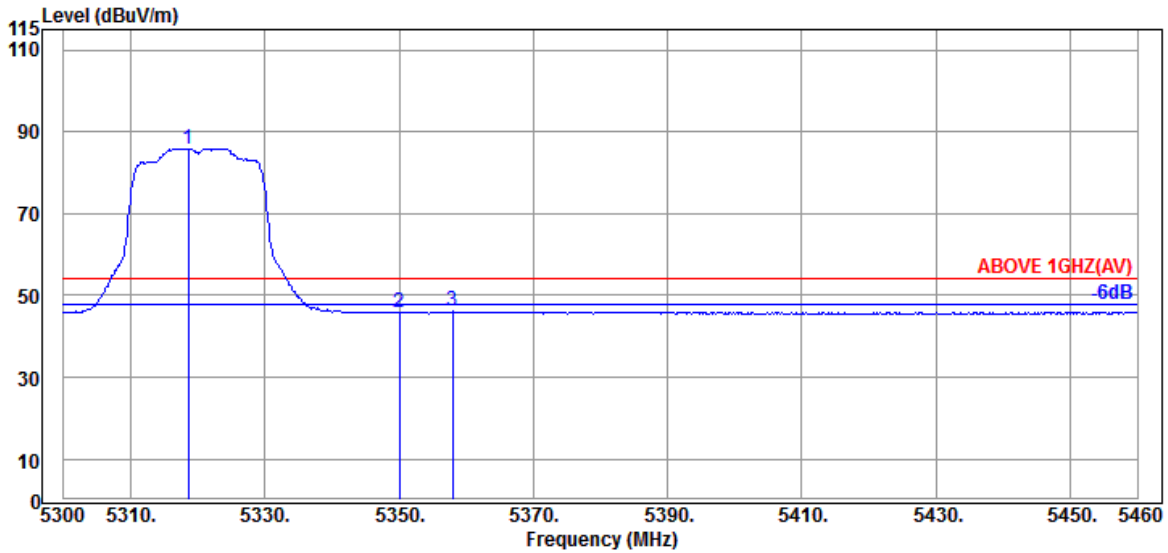


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	34.53	10.81	34.29	74.87	85.92	---	---	Average
5350.080	34.60	10.83	34.27	34.77	45.93	54.00	8.07	Average
5357.920	34.63	10.85	34.27	34.86	46.07	54.00	7.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

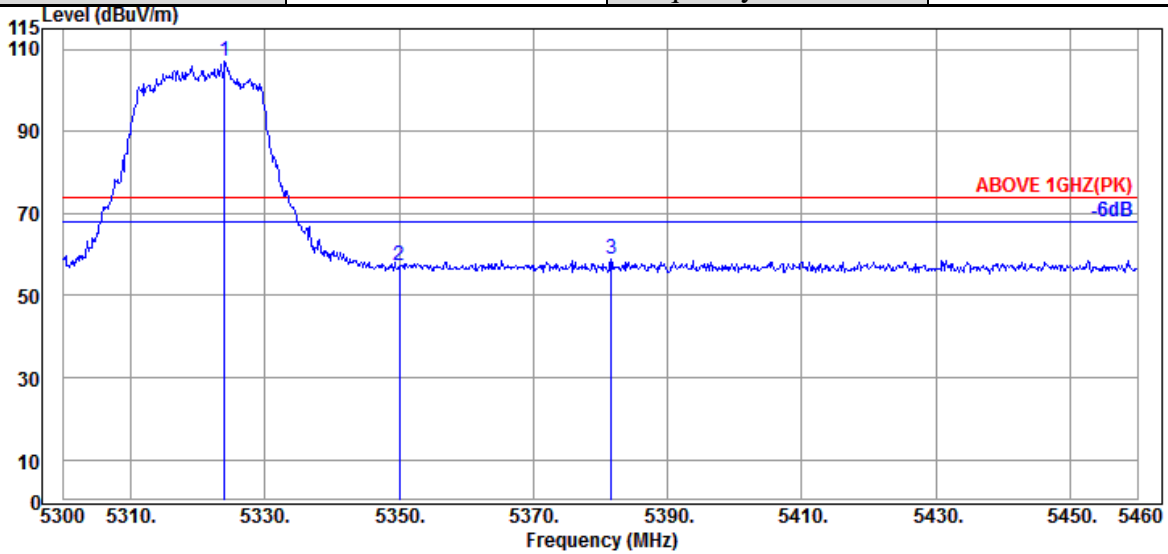

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	34.57	10.83	34.28	96.15	107.27	---	---	Peak
5350.080	34.60	10.83	34.27	46.13	57.29	74.00	16.71	Peak
5381.600	34.67	10.85	34.27	47.70	58.95	74.00	15.05	Peak

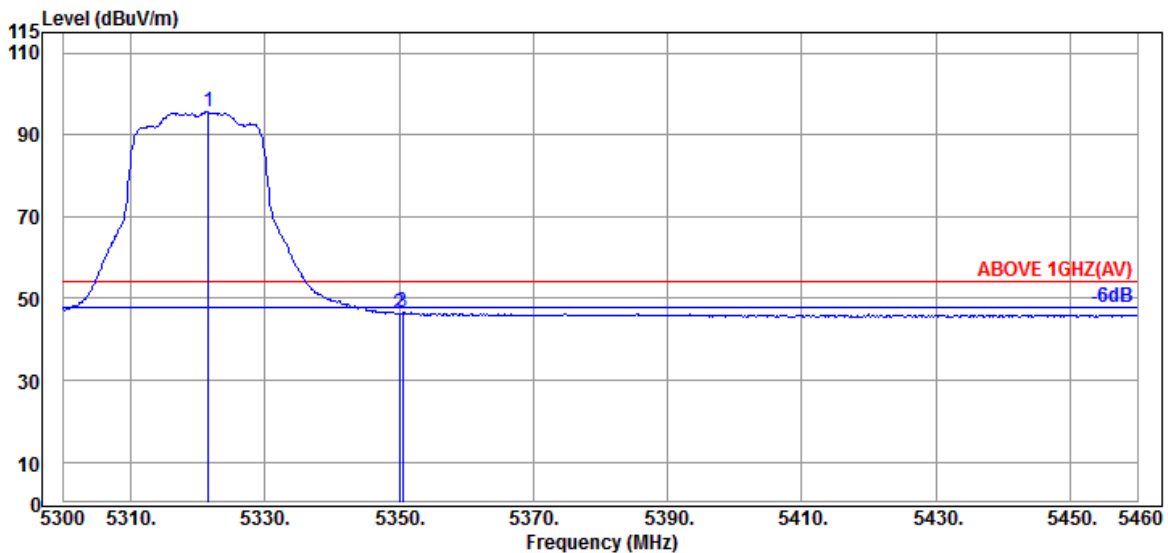


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.600	34.53	10.83	34.29	84.45	95.52	---	---	Average
5350.080	34.60	10.83	34.27	35.13	46.29	54.00	7.71	Average
5350.560	34.60	10.83	34.27	35.33	46.49	54.00	7.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

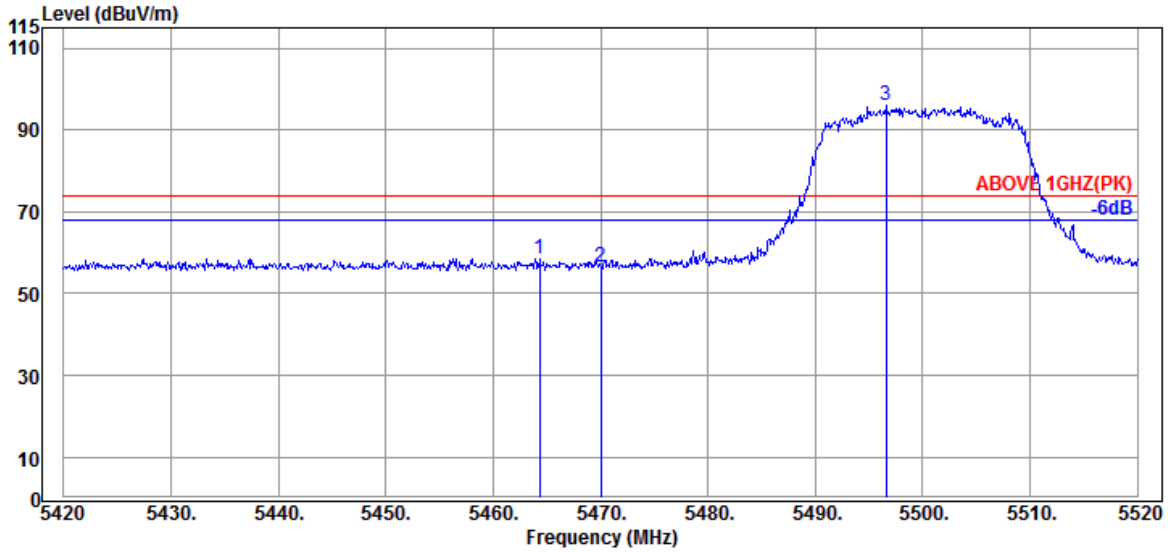

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.47	10.91	34.24	47.45	58.59	74.00	15.41	Peak
5470.000	34.47	10.91	34.24	45.48	56.62	74.00	17.38	Peak
@ 5496.600	34.40	10.93	34.23	85.12	96.22	---	---	Peak

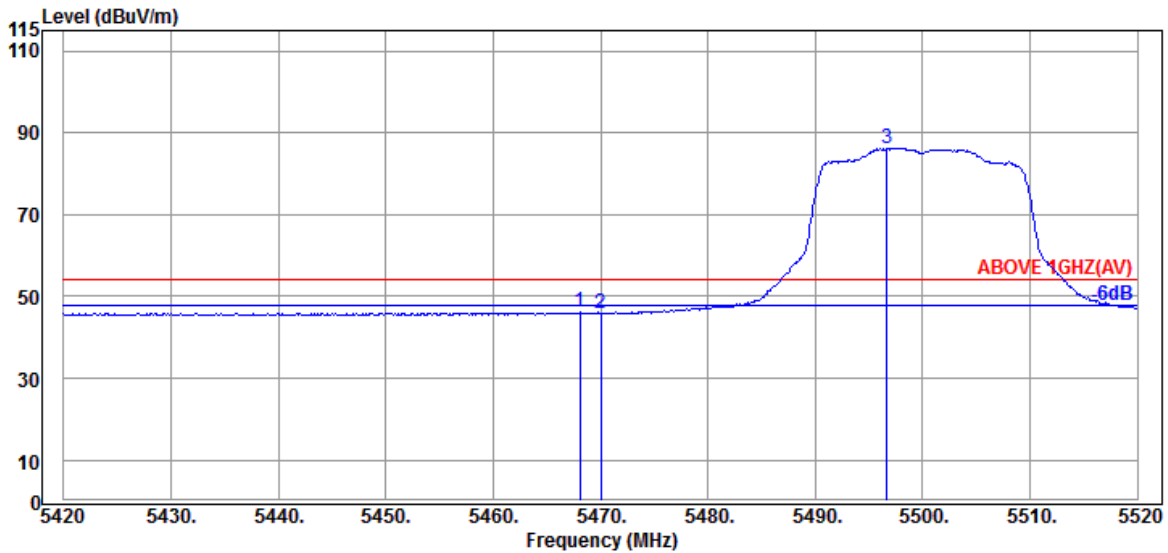


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.47	10.91	34.24	34.95	46.09	54.00	7.91	Average
5470.000	34.47	10.91	34.24	34.73	45.87	54.00	8.13	Average
@ 5496.700	34.40	10.93	34.23	75.15	86.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

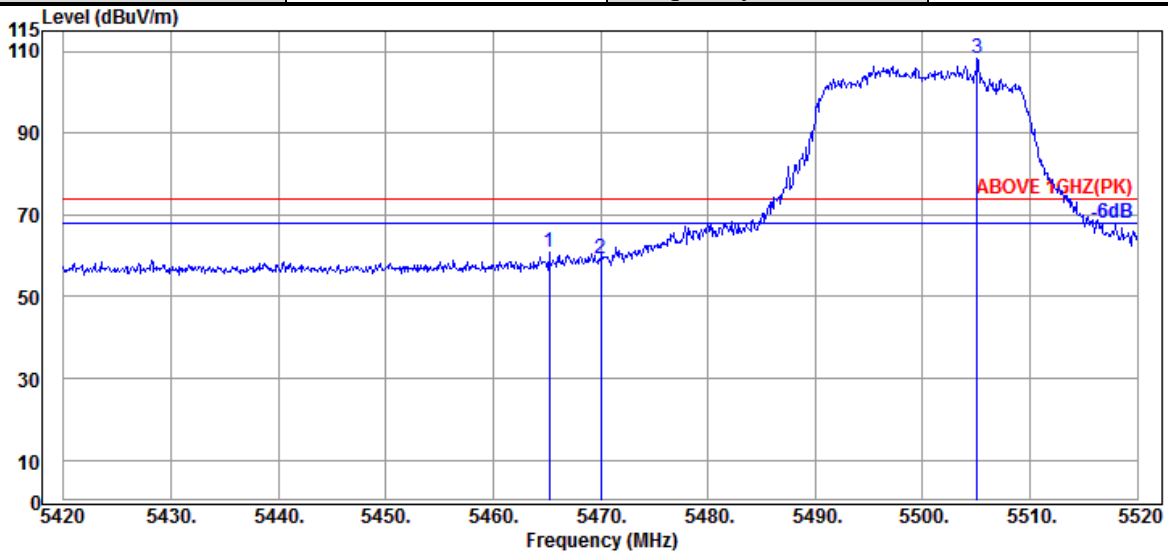

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.47	10.91	34.24	49.66	60.80	74.00	13.20	Peak
5470.000	34.47	10.91	34.24	47.95	59.09	74.00	14.91	Peak
@ 5505.100	34.40	10.93	34.24	97.01	108.10	---	---	Peak

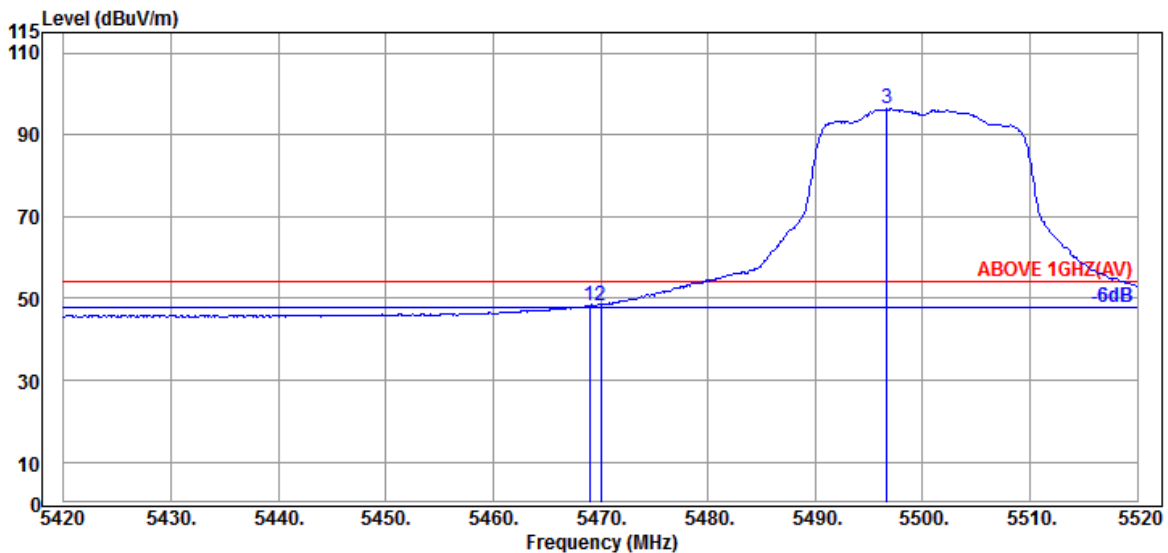


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	37.11	48.25	54.00	5.75	Average
5470.000	34.47	10.91	34.24	37.21	48.35	54.00	5.65	Average
@ 5496.700	34.40	10.93	34.23	85.22	96.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

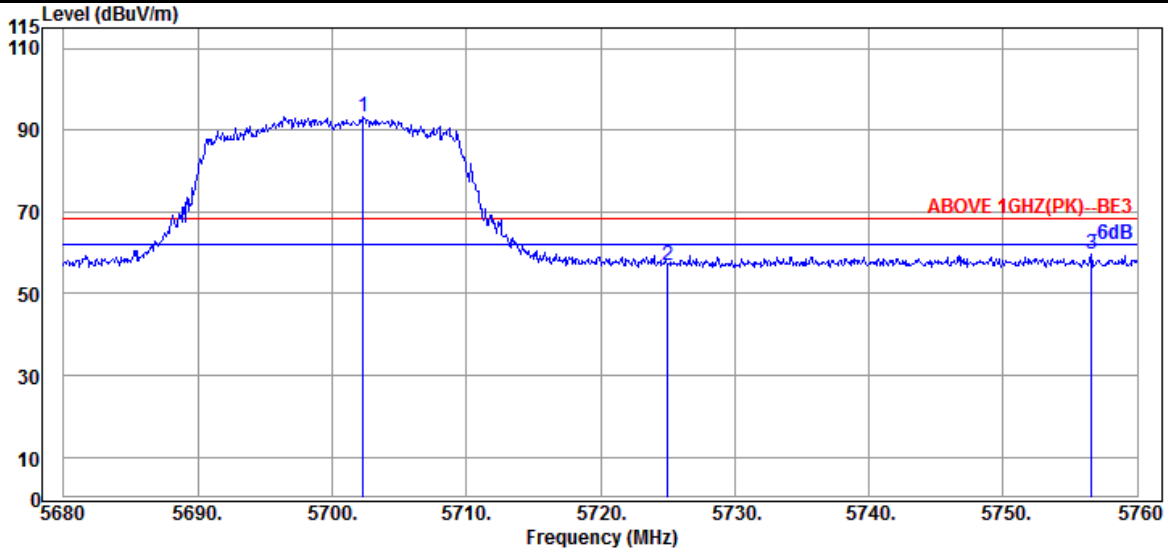

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.320	34.40	11.03	34.31	82.15	93.27	---	---	Peak
5725.040	34.67	11.05	34.32	45.64	57.04	68.20	11.16	Peak
5756.560	34.87	11.06	34.35	48.05	59.63	68.20	8.57	Peak

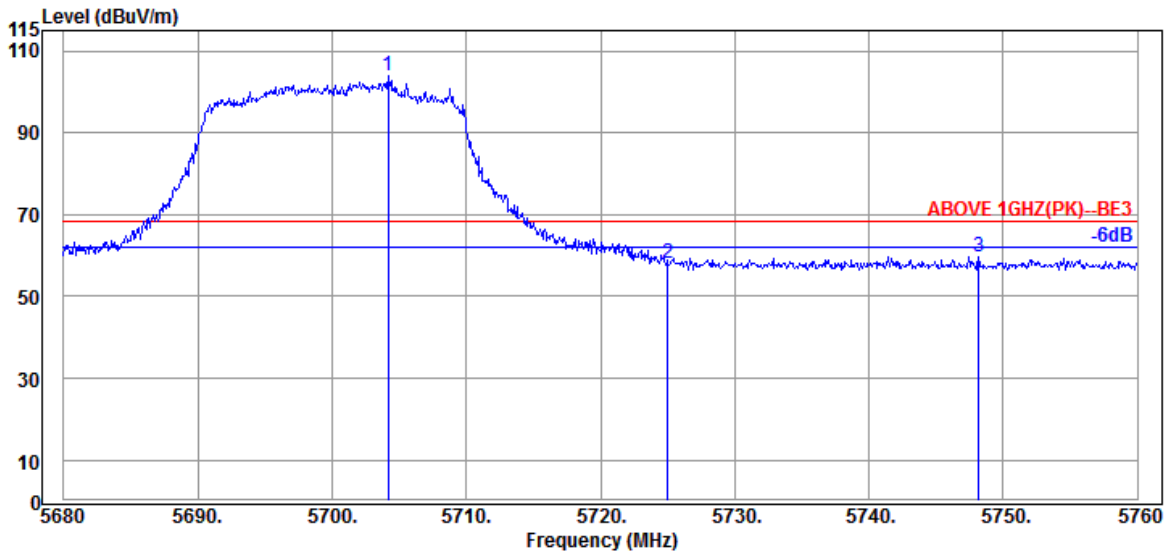


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.160	34.40	11.03	34.31	92.87	103.99	---	---	Peak
5725.040	34.67	11.05	34.32	46.86	58.26	68.20	9.94	Peak
5748.160	34.80	11.06	34.33	48.25	59.78	68.20	8.42	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

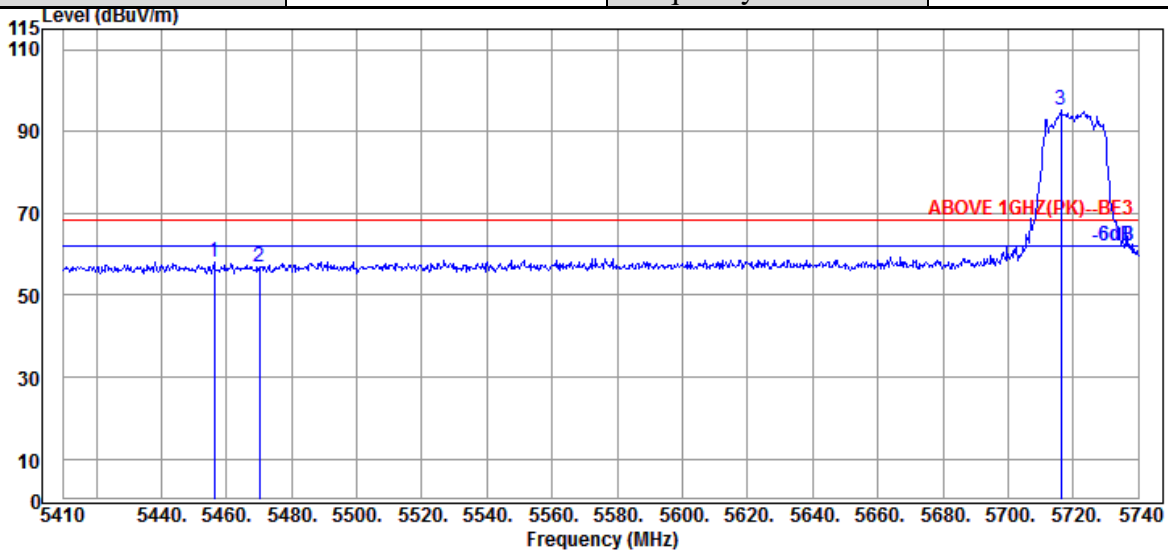

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.50	10.89	34.24	46.94	58.09	68.20	10.11	Peak
5470.060	34.47	10.91	34.24	45.89	57.03	68.20	11.17	Peak
@ 5716.240	34.53	11.05	34.32	84.13	95.39	---	---	Peak

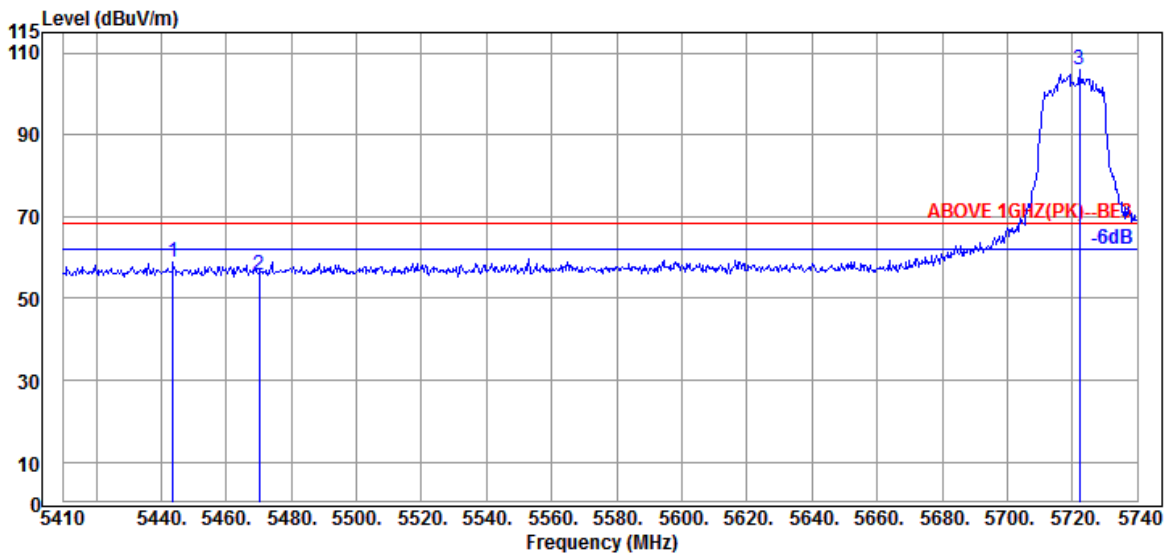


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.660	34.55	10.89	34.25	47.53	58.72	68.20	9.48	Peak
5470.060	34.47	10.91	34.24	44.76	55.90	68.20	12.30	Peak
@ 5722.180	34.67	11.05	34.32	94.58	105.98	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

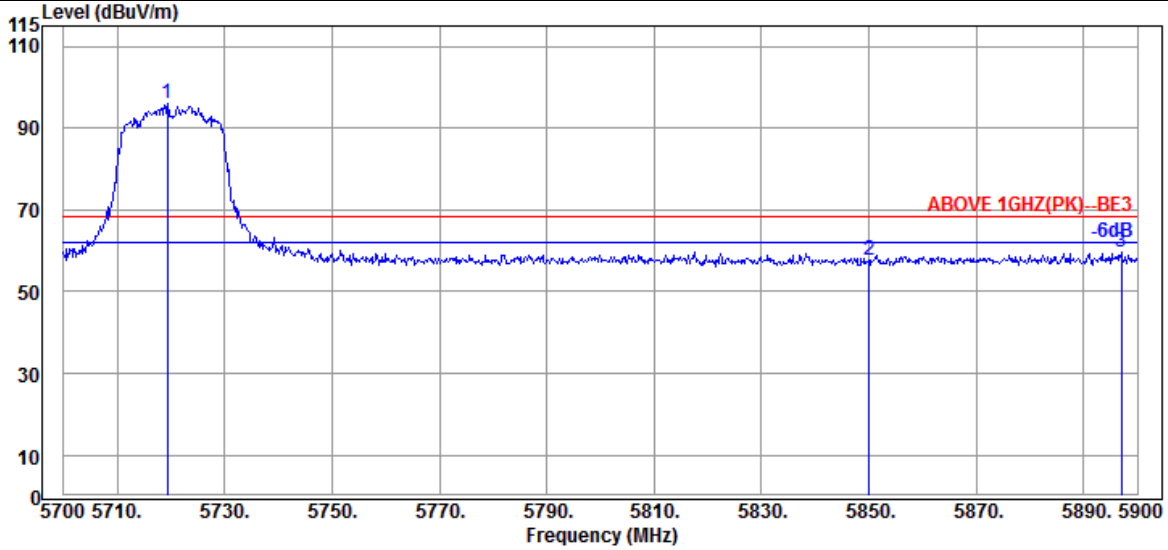

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.400	34.53	11.05	34.32	84.63	95.89	---	---	Peak
5850.000	35.10	11.10	34.38	45.94	57.76	68.20	10.44	Peak
5897.000	35.40	11.14	34.40	47.51	59.65	68.20	8.55	Peak

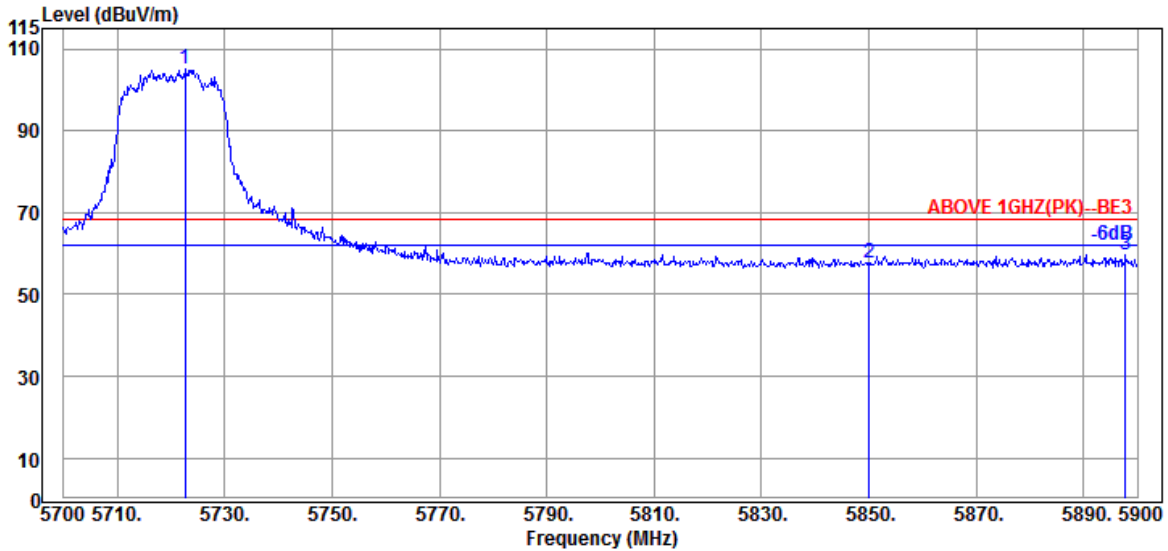


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	34.67	11.05	34.32	93.72	105.12	---	---	Peak
5850.000	35.10	11.10	34.38	45.74	57.56	68.20	10.64	Peak
5897.800	35.40	11.14	34.40	47.50	59.64	68.20	8.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

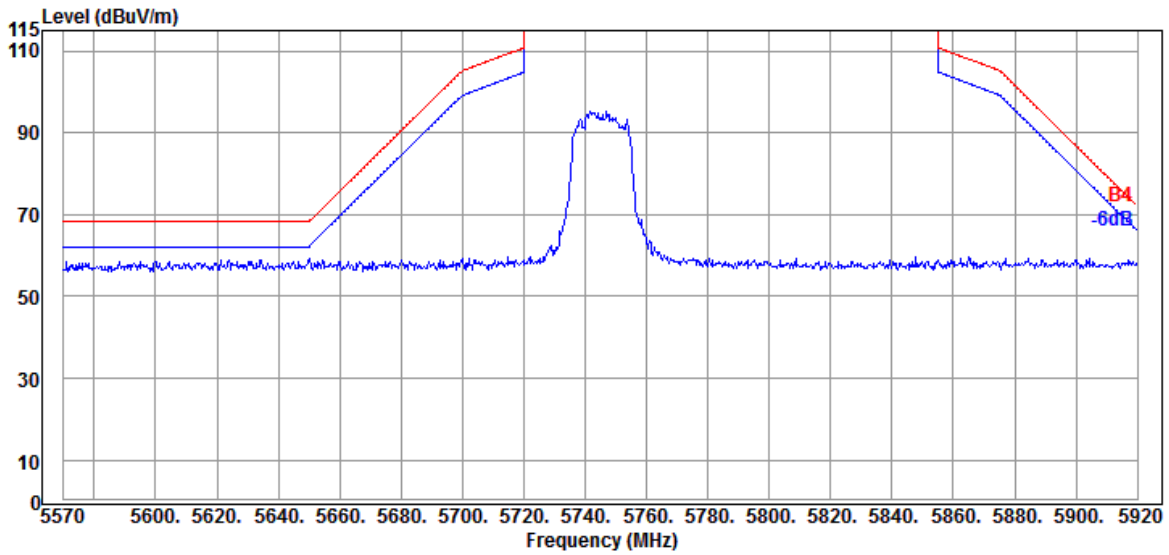


Antenna at Vertical Polarization

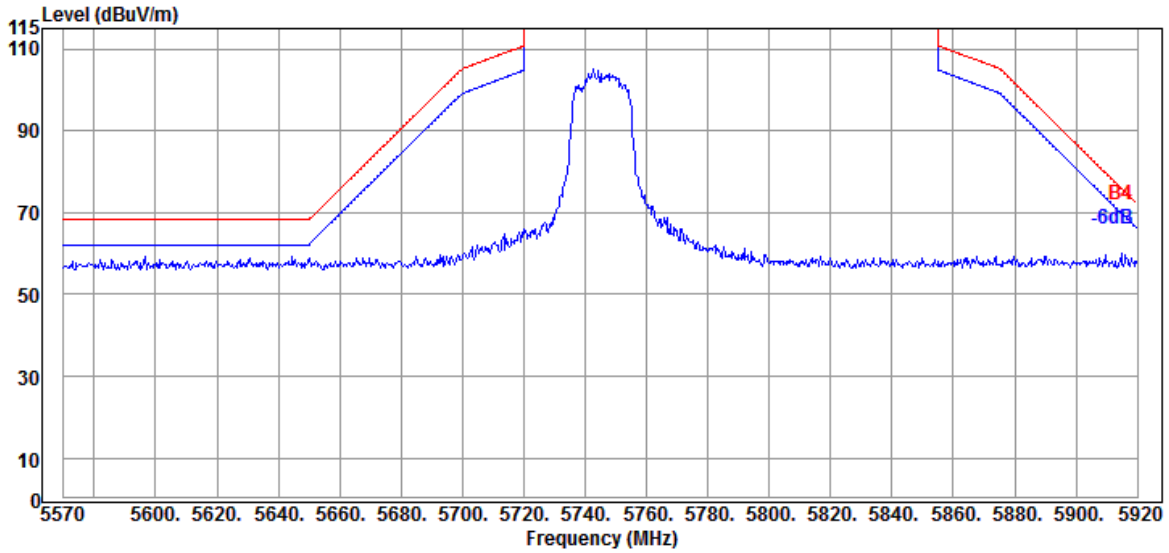


Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

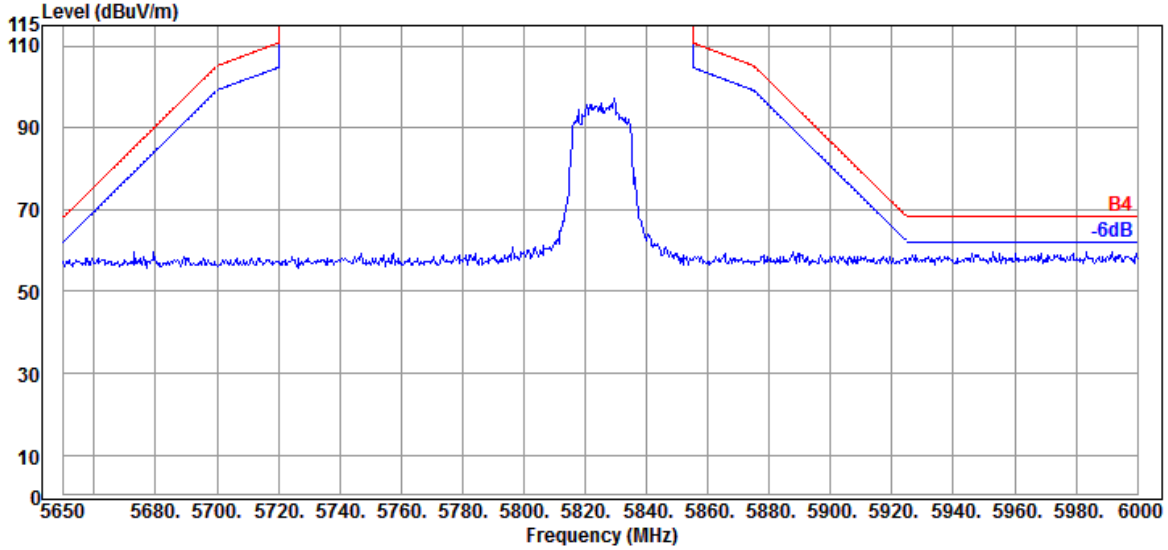

Antenna at Vertical Polarization

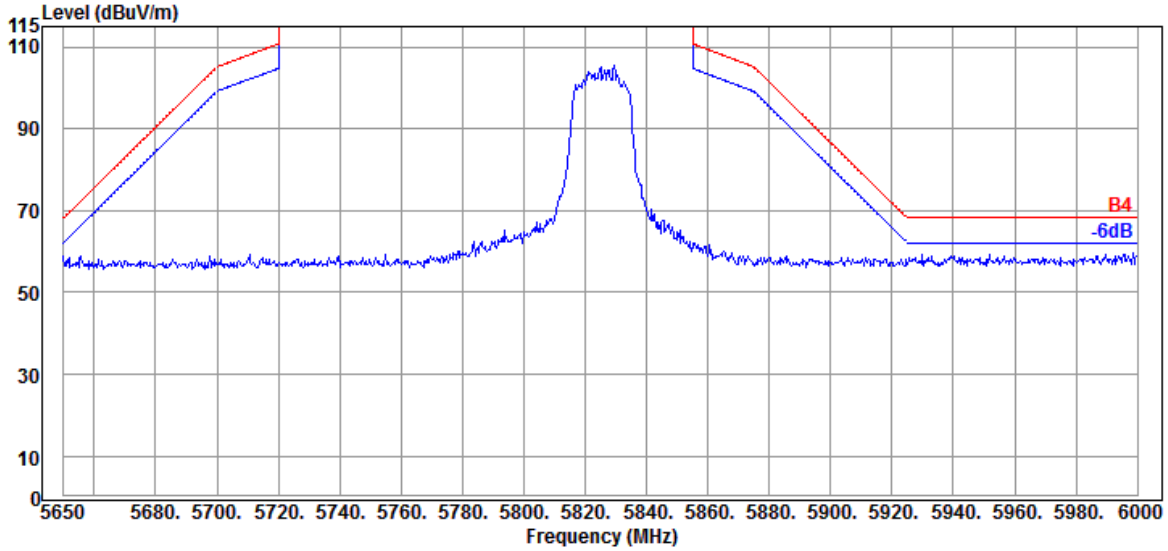


Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

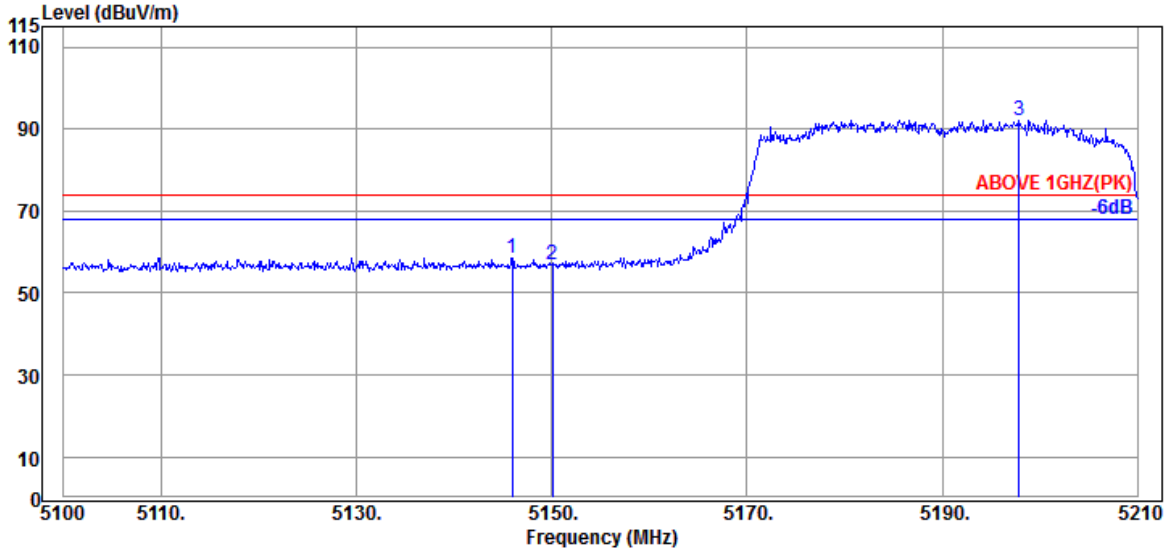

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.980	34.20	10.70	34.35	48.08	58.63	74.00	15.37	Peak
5150.050	34.20	10.70	34.35	46.18	56.73	74.00	17.27	Peak
@ 5197.900	34.20	10.74	34.33	81.64	92.25	---	---	Peak

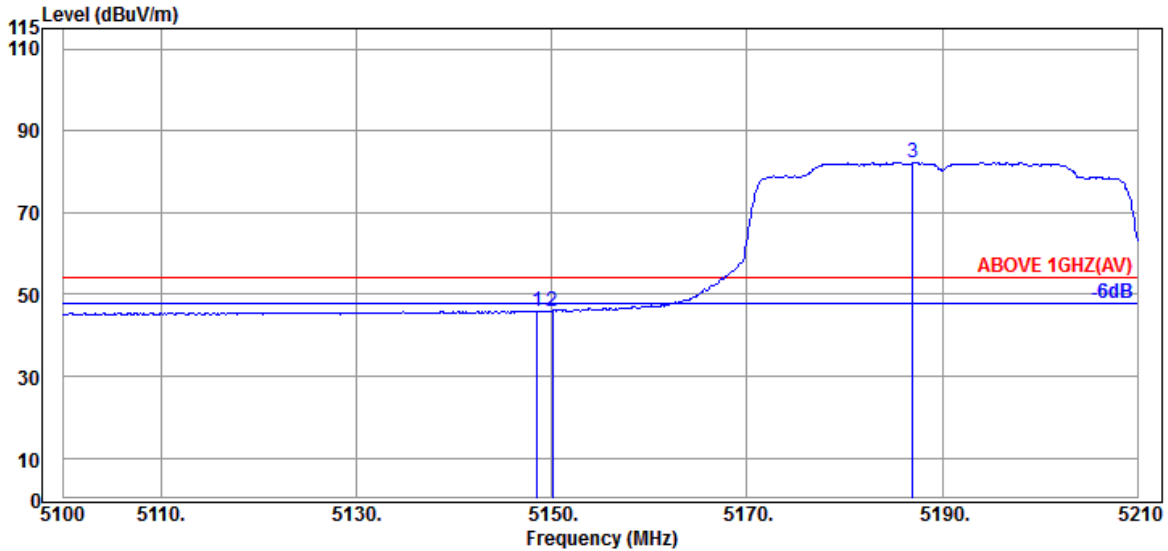


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.510	34.20	10.70	34.35	35.46	46.01	54.00	7.99	Average
5150.050	34.20	10.70	34.35	35.36	45.91	54.00	8.09	Average
@ 5187.010	34.20	10.72	34.34	71.81	82.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

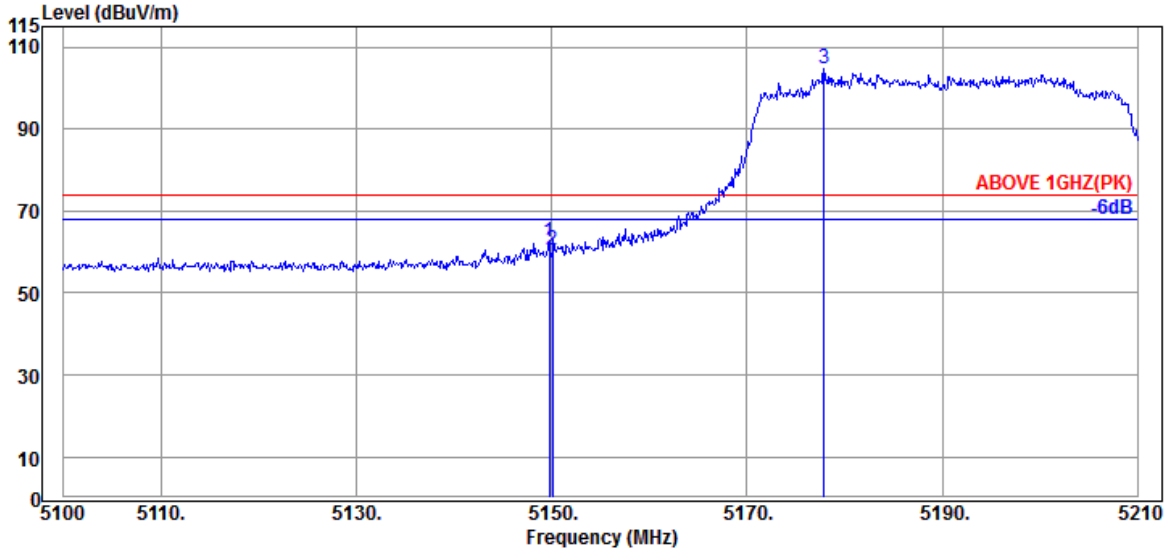

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	51.72	62.27	74.00	11.73	Peak
5150.050	34.20	10.70	34.35	49.86	60.41	74.00	13.59	Peak
@ 5177.880	34.20	10.72	34.34	94.08	104.66	---	---	Peak

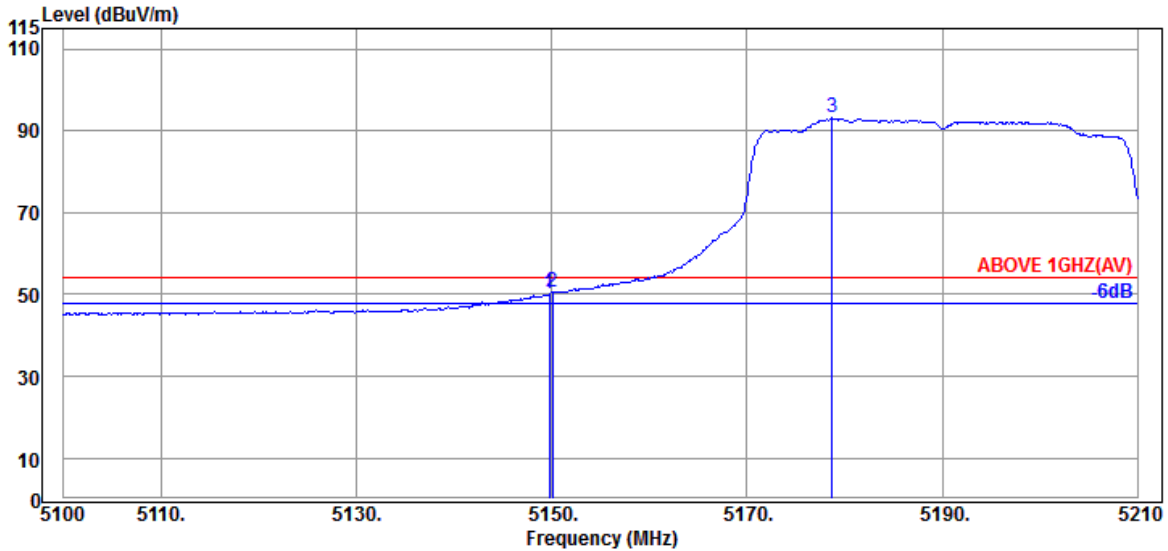


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	39.55	50.10	54.00	3.90	Average
5150.050	34.20	10.70	34.35	39.91	50.46	54.00	3.54	Average
@ 5178.760	34.20	10.72	34.34	82.55	93.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

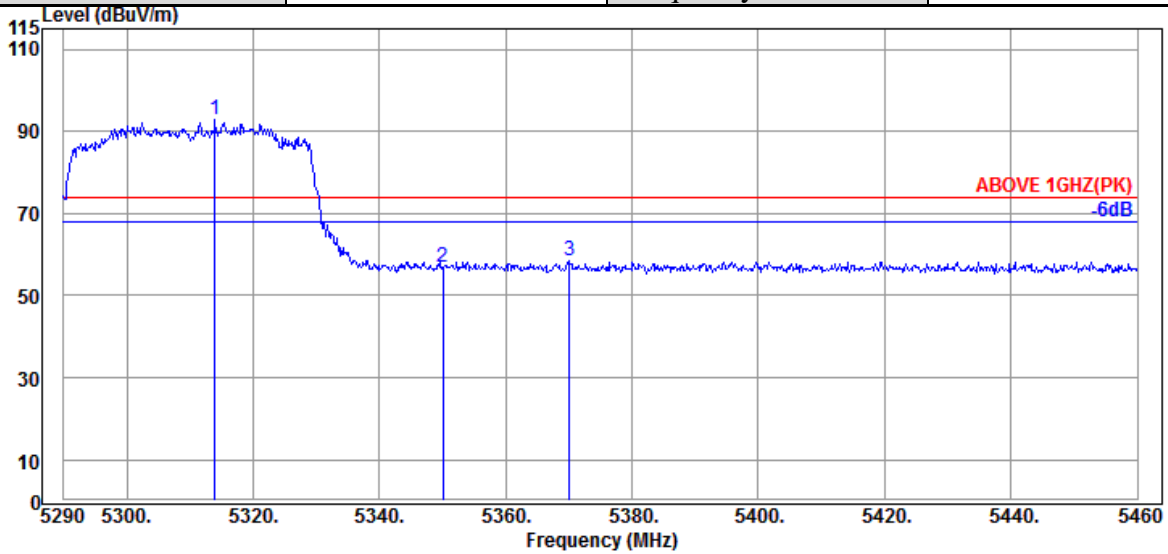

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.970	34.53	10.81	34.29	81.82	92.87	---	---	Peak
5350.010	34.60	10.83	34.27	45.69	56.85	74.00	17.15	Peak
5370.070	34.67	10.85	34.27	47.09	58.34	74.00	15.66	Peak

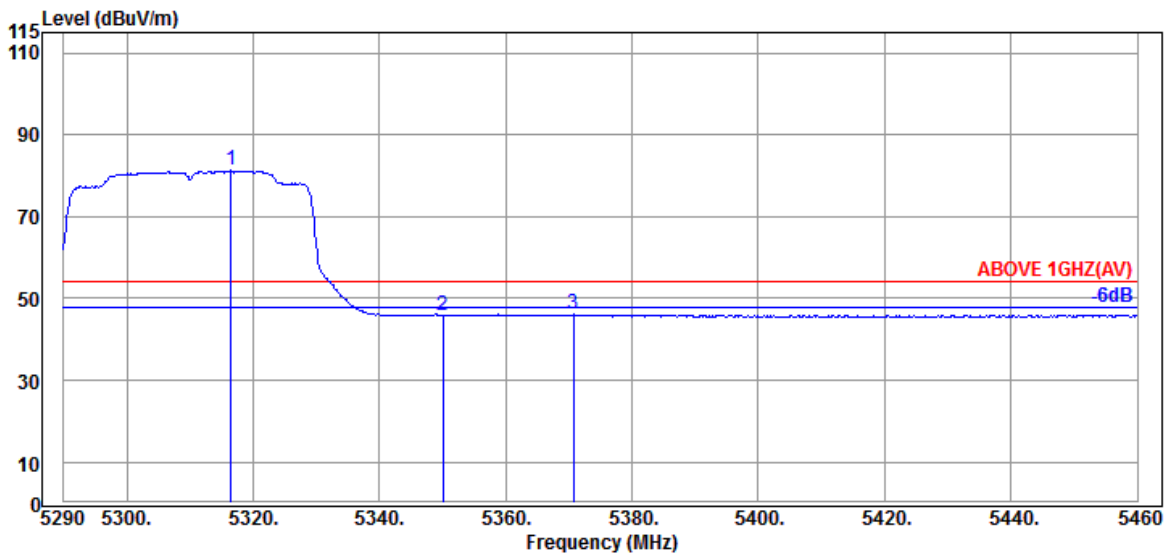


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.520	34.53	10.81	34.29	70.18	81.23	---	---	Average
5350.010	34.60	10.83	34.27	34.57	45.73	54.00	8.27	Average
5370.750	34.67	10.85	34.27	34.83	46.08	54.00	7.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

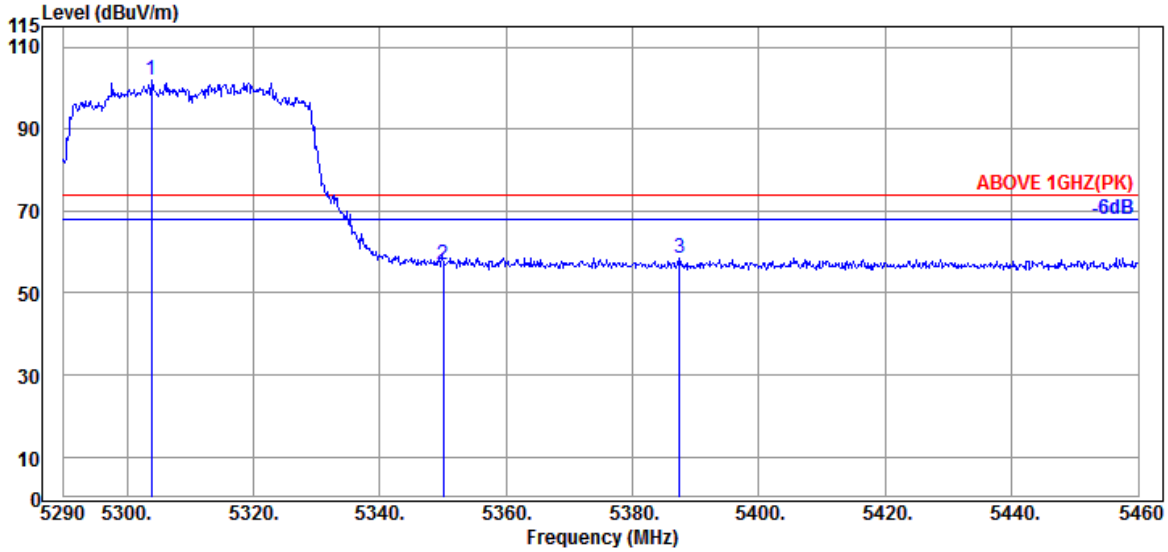

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.940	34.50	10.81	34.29	91.13	102.15	---	---	Peak
5350.010	34.60	10.83	34.27	45.89	57.05	74.00	16.95	Peak
5387.410	34.70	10.85	34.27	47.38	58.66	74.00	15.34	Peak

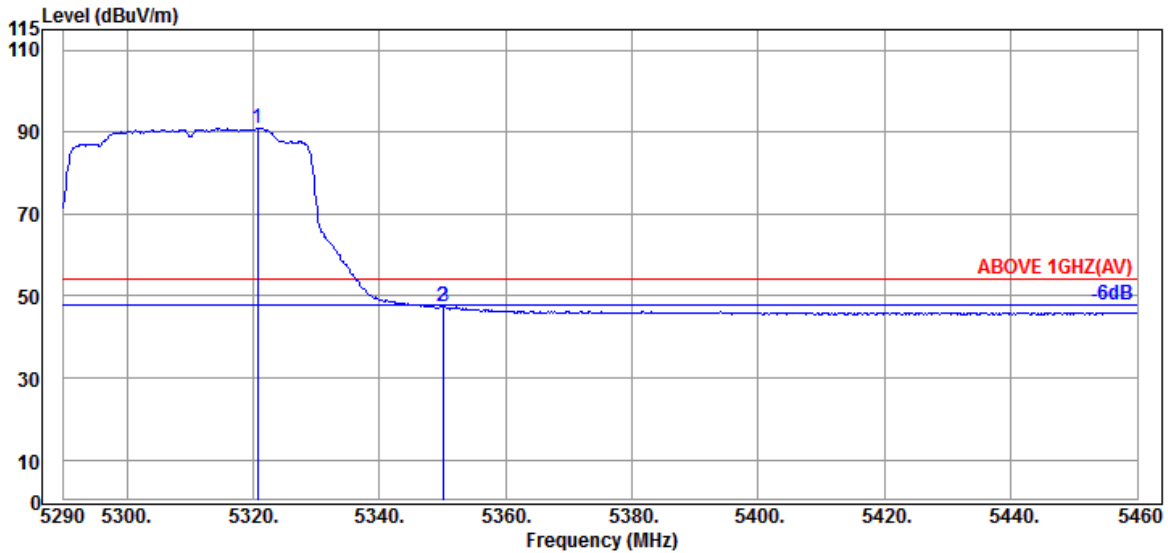


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.770	34.53	10.81	34.29	79.80	90.85	---	---	Average
5350.010	34.60	10.83	34.27	36.18	47.34	54.00	6.66	Average
5350.180	34.60	10.83	34.27	36.21	47.37	54.00	6.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

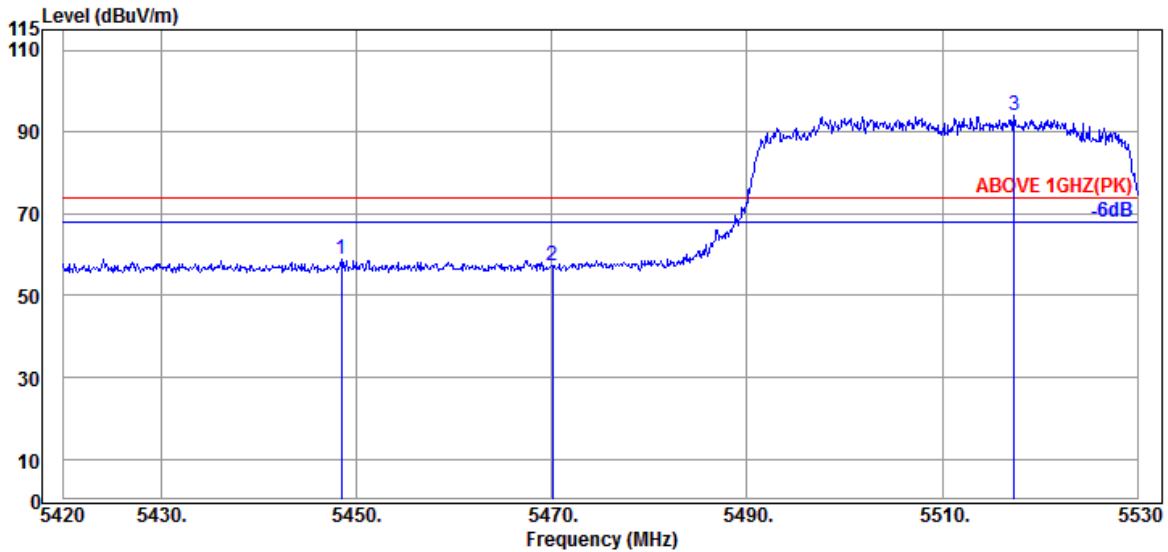

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5448.490	34.50	10.89	34.25	47.83	58.97	74.00	15.03	Peak
5470.050	34.47	10.91	34.24	46.01	57.15	74.00	16.85	Peak
@ 5517.350	34.37	10.93	34.24	83.13	94.19	---	---	Peak

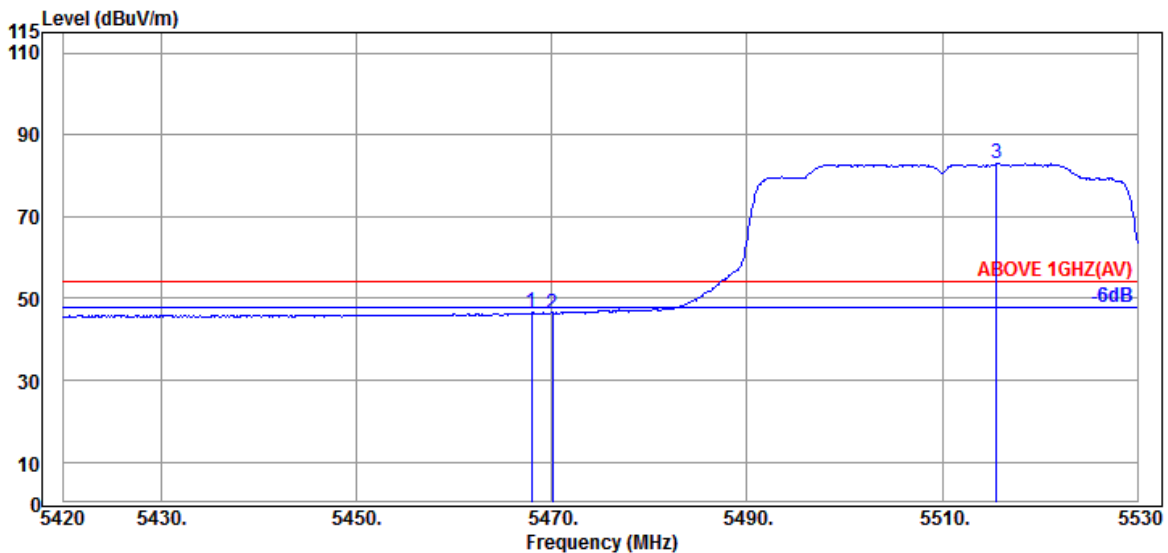


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.960	34.47	10.91	34.24	35.46	46.60	54.00	7.40	Average
5470.050	34.47	10.91	34.24	35.23	46.37	54.00	7.63	Average
@ 5515.590	34.37	10.93	34.24	71.86	82.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

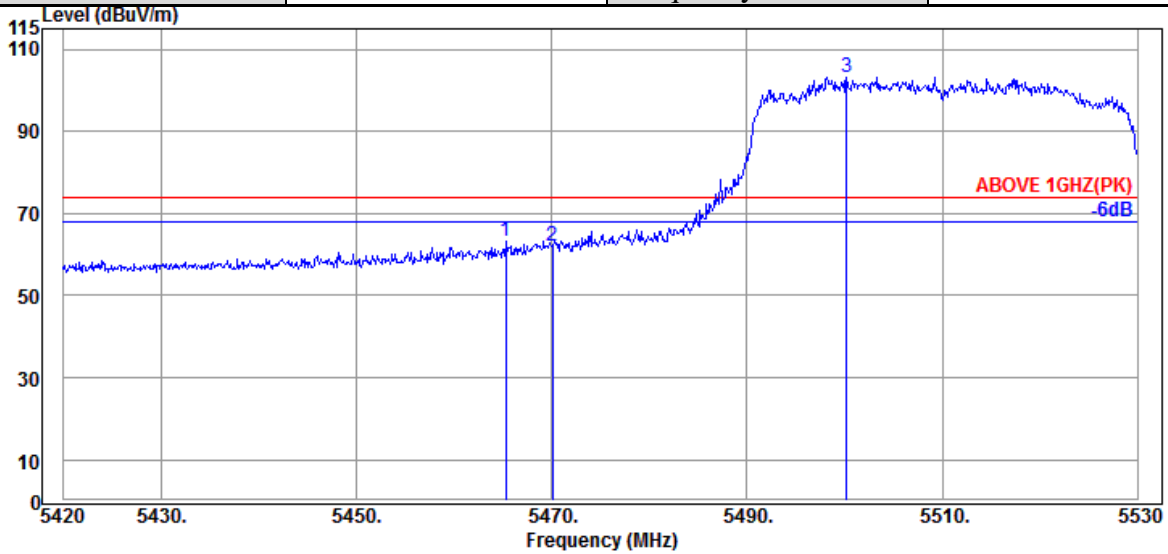

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.320	34.47	10.91	34.24	52.00	63.14	74.00	10.86	Peak
5470.050	34.47	10.91	34.24	50.81	61.95	74.00	12.05	Peak
@ 5500.190	34.40	10.93	34.23	92.01	103.11	---	---	Peak

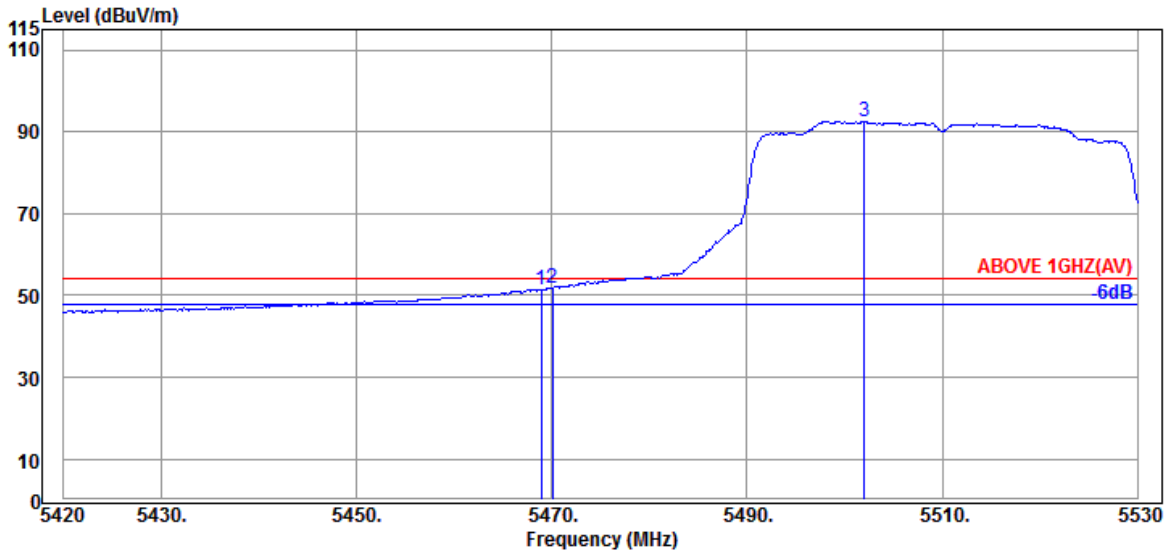


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	10.91	34.24	40.30	51.44	54.00	2.56	Average
5470.050	34.47	10.91	34.24	40.54	51.68	54.00	2.32	Average
@ 5502.060	34.40	10.93	34.24	81.52	92.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

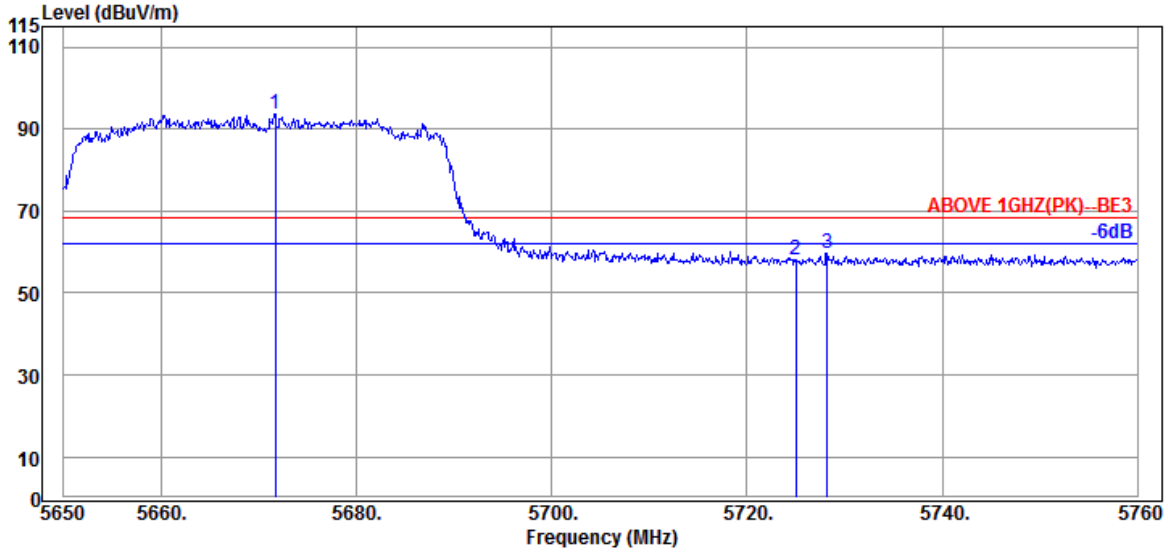

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.670	34.40	11.01	34.30	82.62	93.73	---	---	Peak
5725.020	34.67	11.05	34.32	46.58	57.98	68.20	10.22	Peak
5728.210	34.67	11.05	34.32	48.33	59.73	68.20	8.47	Peak

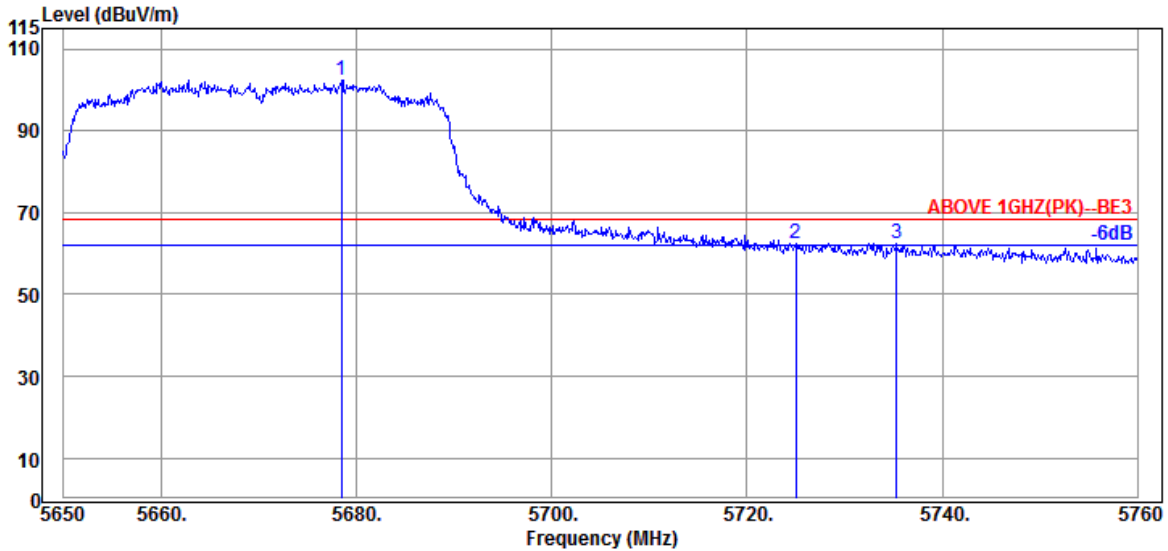


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.490	34.40	11.03	34.30	91.37	102.50	---	---	Peak
5725.020	34.67	11.05	34.32	50.96	62.36	68.20	5.84	Peak
5735.360	34.67	11.05	34.33	51.22	62.61	68.20	5.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

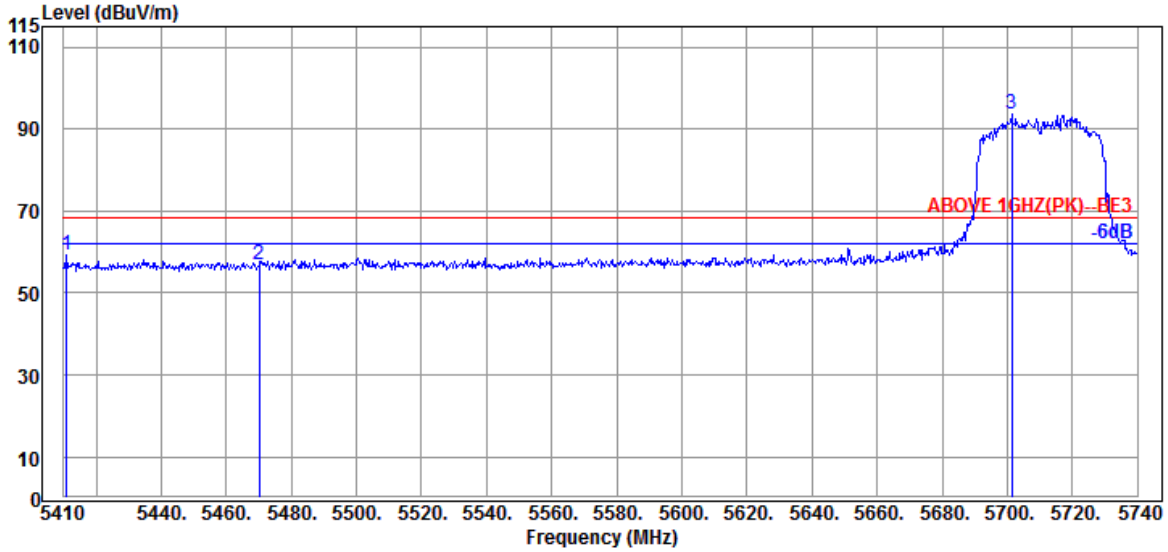

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5410.990	34.65	10.87	34.26	47.94	59.20	68.20	9.00	Peak
5470.060	34.47	10.91	34.24	45.87	57.01	68.20	11.19	Peak
@ 5701.390	34.40	11.03	34.31	82.43	93.55	---	---	Peak

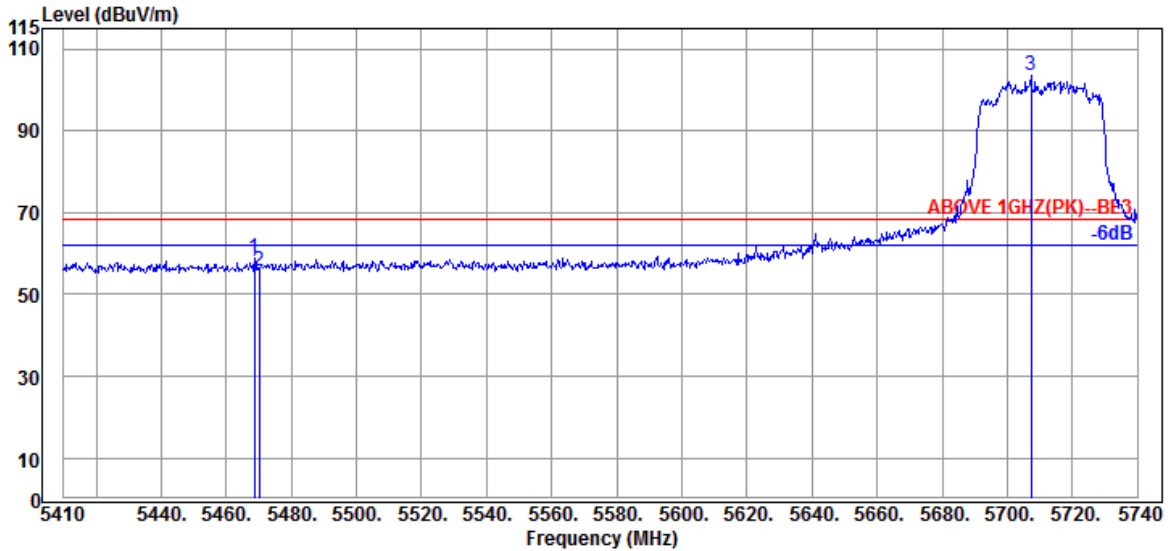


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.740	34.47	10.91	34.24	47.62	58.76	68.20	9.44	Peak
5470.060	34.47	10.91	34.24	44.52	55.66	68.20	12.54	Peak
@ 5707.330	34.53	11.03	34.32	92.13	103.37	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

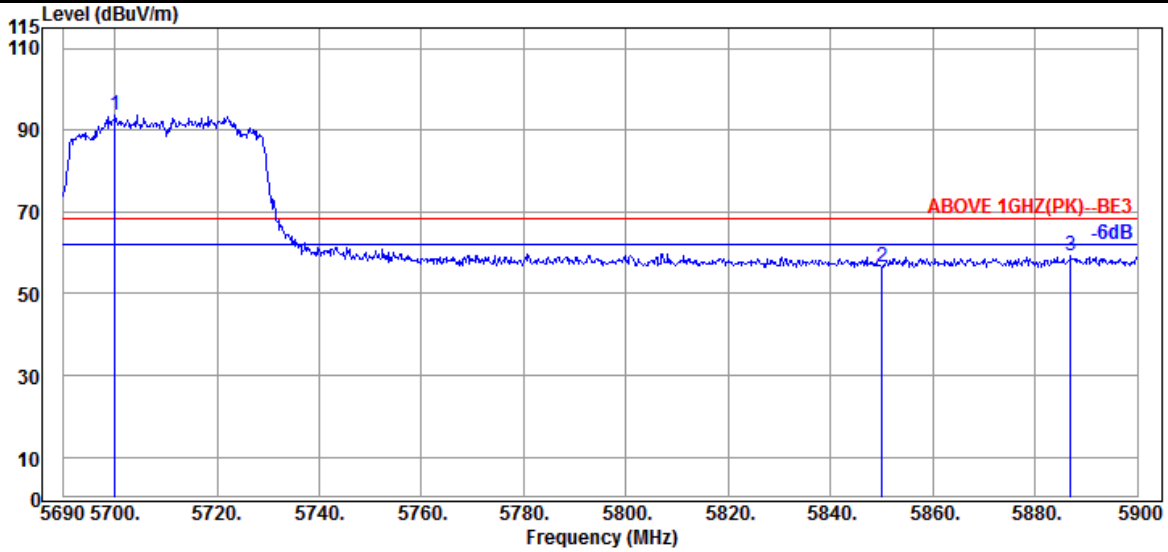

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.080	34.40	11.03	34.31	82.36	93.48	---	---	Peak
5850.020	35.10	11.10	34.38	44.82	56.64	68.20	11.56	Peak
5886.980	35.30	11.12	34.40	47.26	59.28	68.20	8.92	Peak

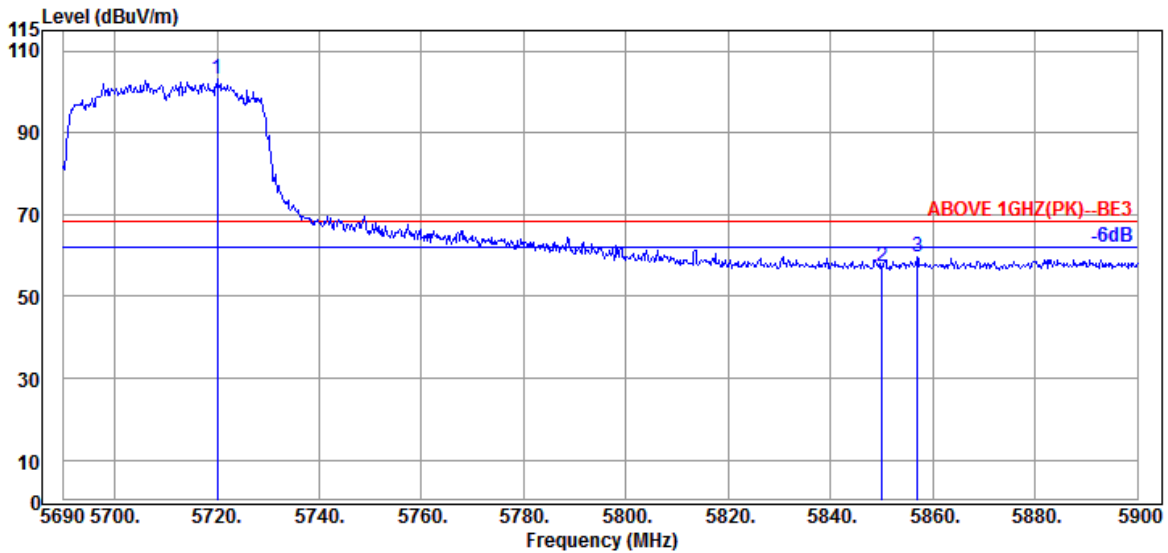


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.030	34.53	11.05	34.32	91.92	103.18	---	---	Peak
5850.020	35.10	11.10	34.38	45.29	57.11	68.20	11.09	Peak
5856.950	35.20	11.10	34.38	47.61	59.53	68.20	8.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

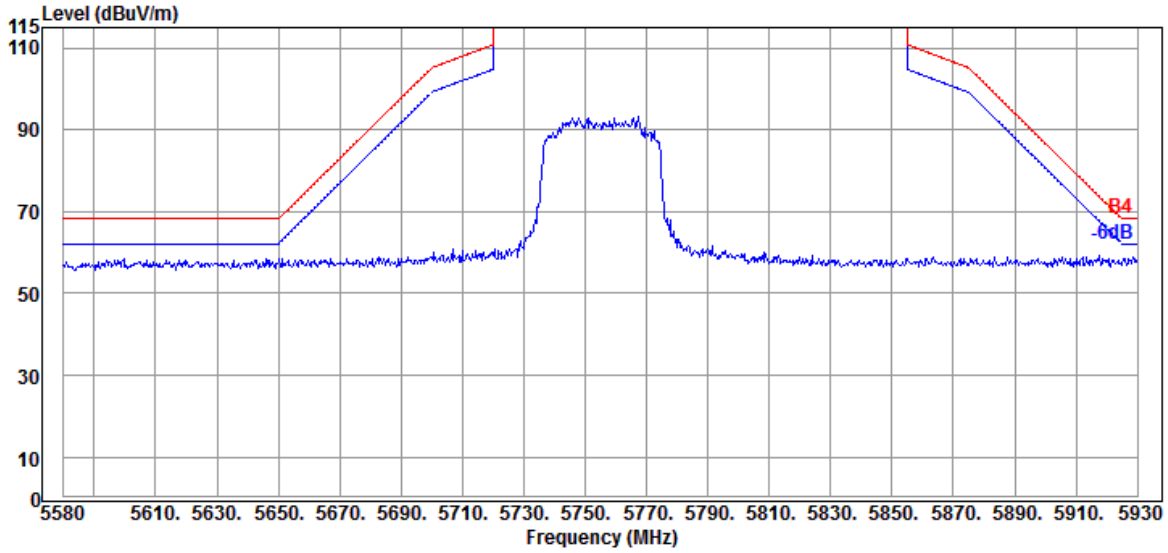


Antenna at Vertical Polarization

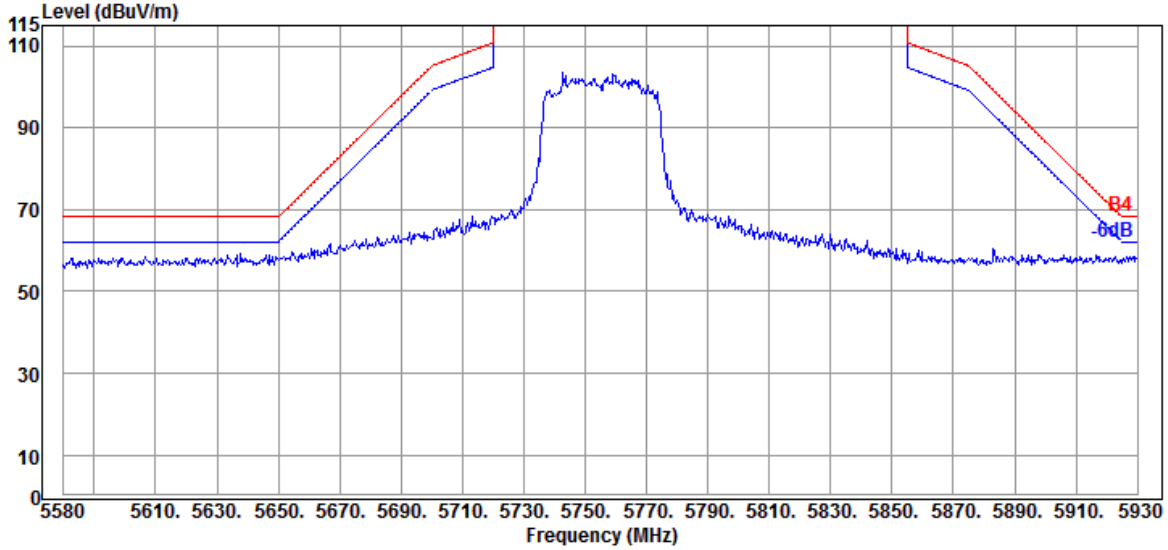


Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

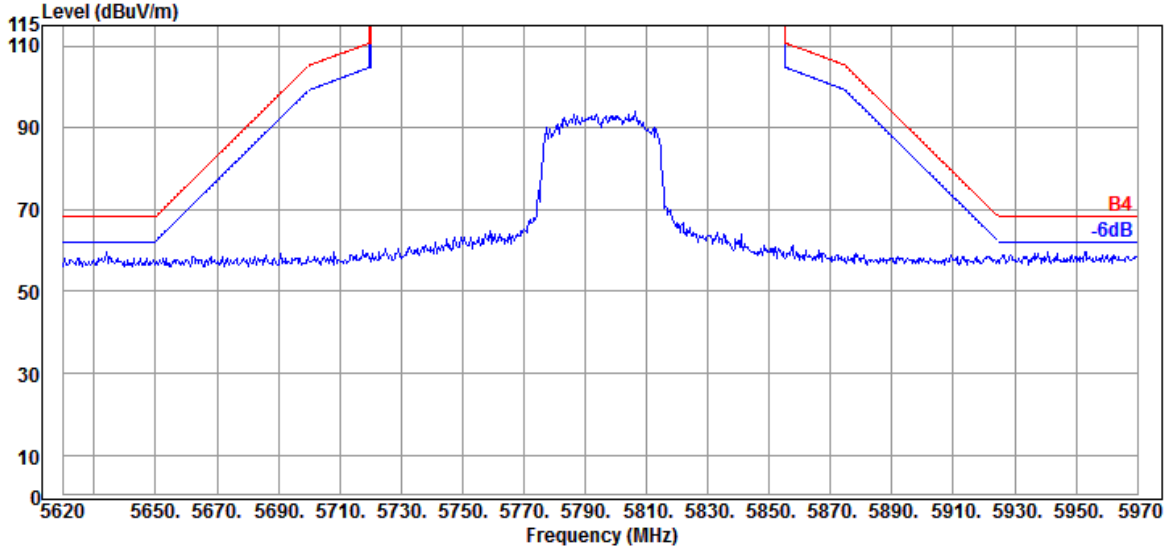

Antenna at Vertical Polarization

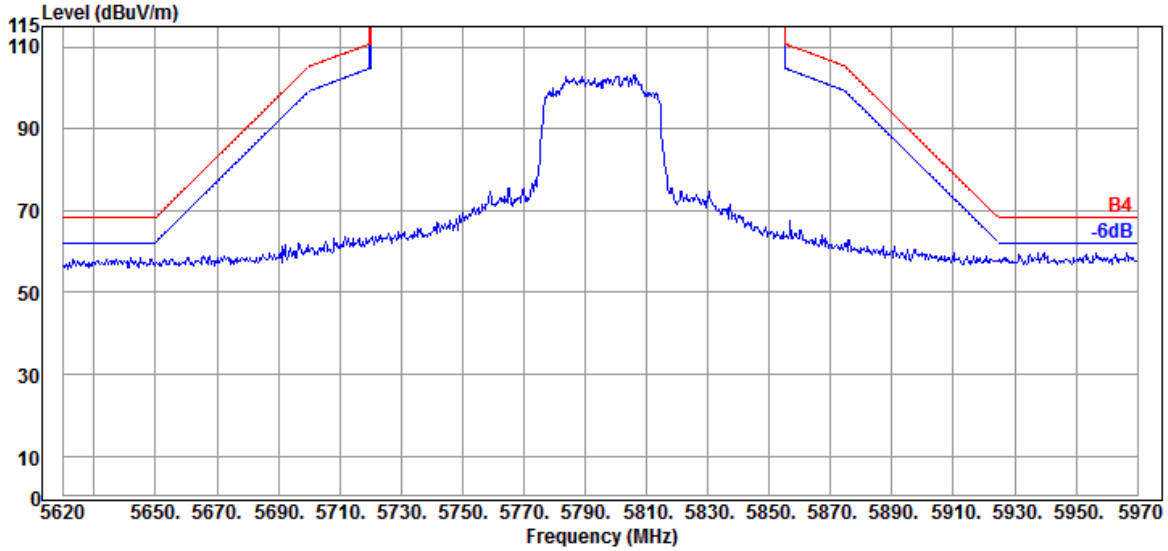


Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

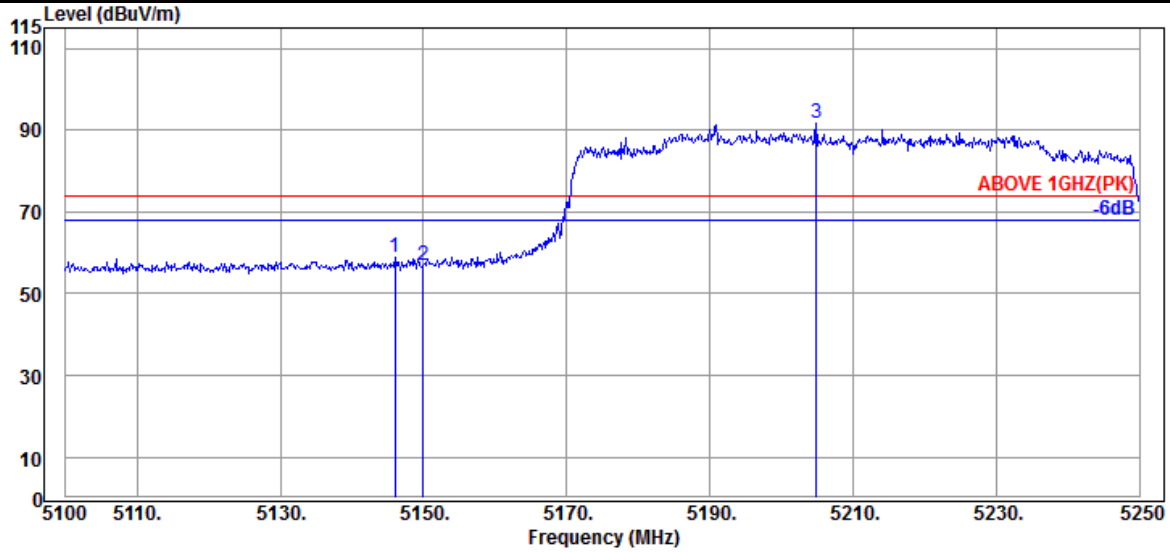

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.050	34.20	10.70	34.35	48.29	58.84	74.00	15.16	Peak
5149.950	34.20	10.70	34.35	46.43	56.98	74.00	17.02	Peak
@ 5204.850	34.25	10.74	34.33	81.09	91.75	---	---	Peak

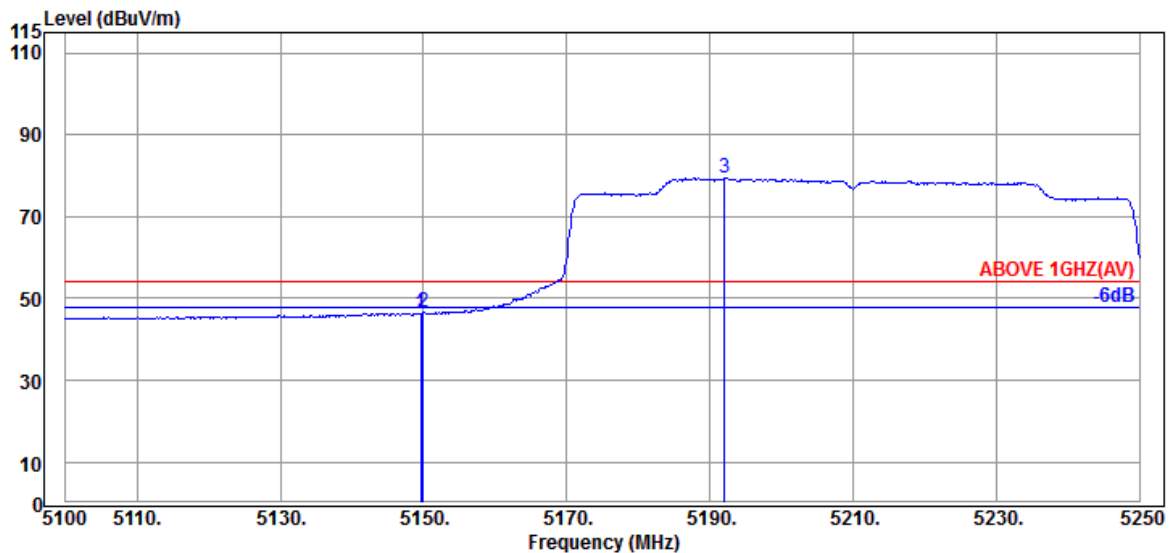


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	35.85	46.40	54.00	7.60	Average
5149.950	34.20	10.70	34.35	36.03	46.58	54.00	7.42	Average
@ 5192.100	34.20	10.74	34.34	68.91	79.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

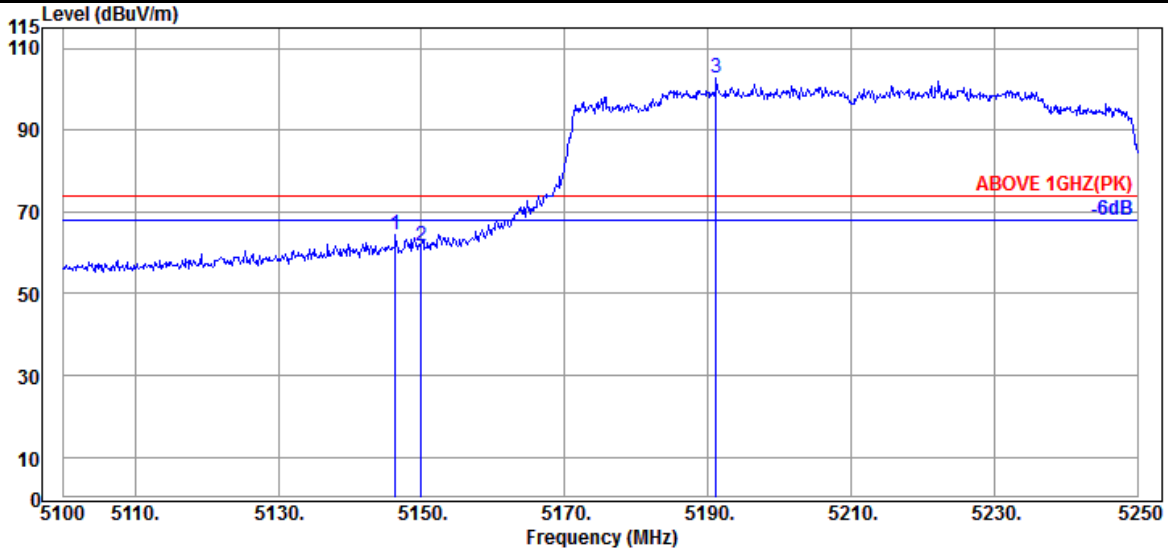

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.350	34.20	10.70	34.35	53.72	64.27	74.00	9.73	Peak
5149.950	34.20	10.70	34.35	51.20	61.75	74.00	12.25	Peak
@ 5191.200	34.20	10.74	34.34	92.32	102.92	---	---	Peak

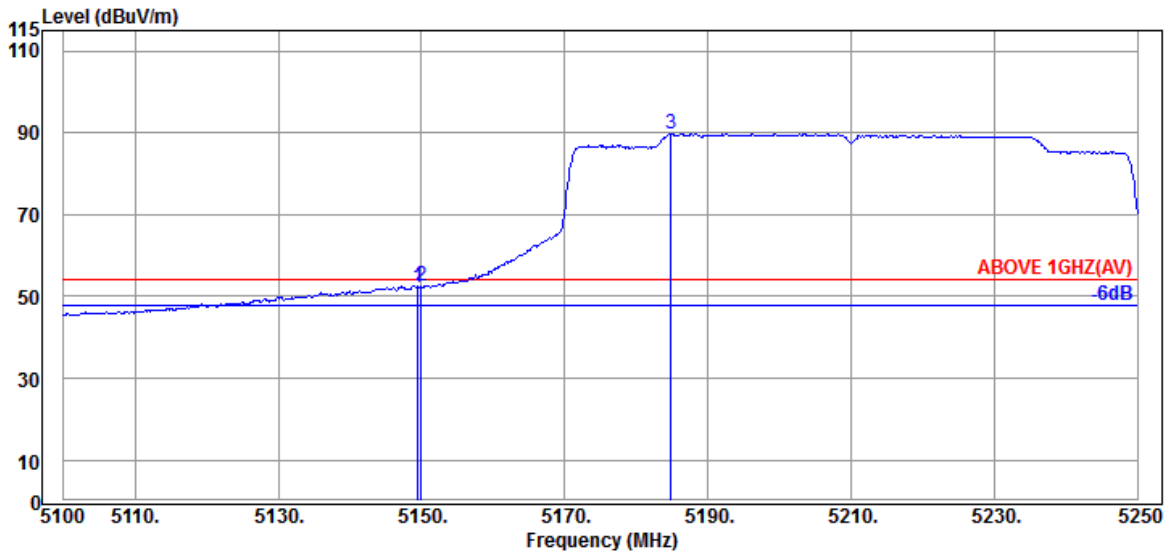


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	41.79	52.34	54.00	1.66	Average
5149.950	34.20	10.70	34.35	41.84	52.39	54.00	1.61	Average
@ 5184.900	34.20	10.72	34.34	79.28	89.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

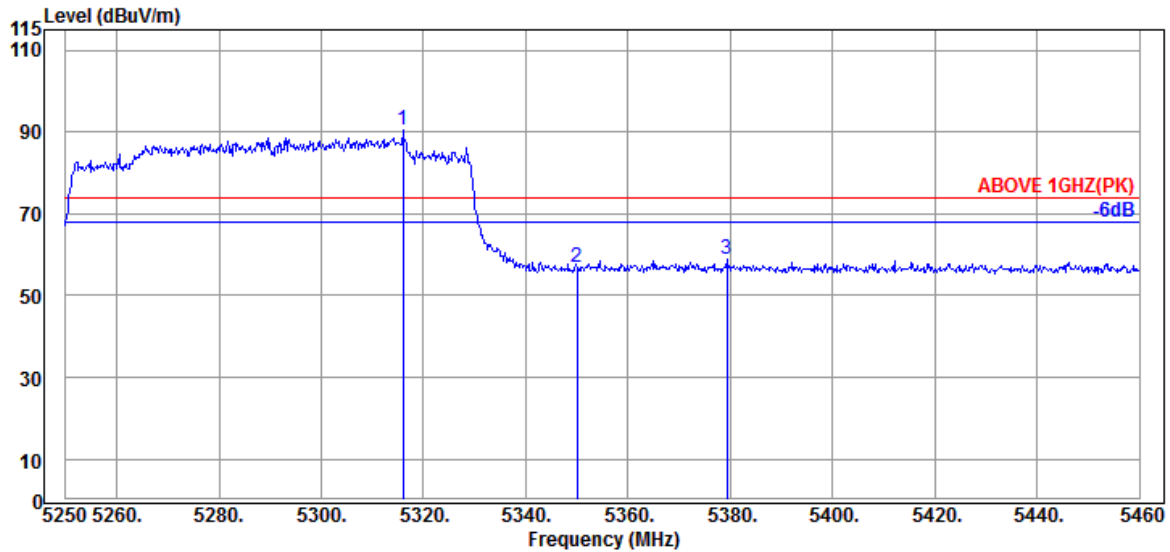

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.940	34.53	10.81	34.29	79.37	90.42	---	---	Peak
5349.960	34.60	10.83	34.27	45.77	56.93	74.00	17.07	Peak
5379.360	34.67	10.85	34.27	47.72	58.97	74.00	15.03	Peak

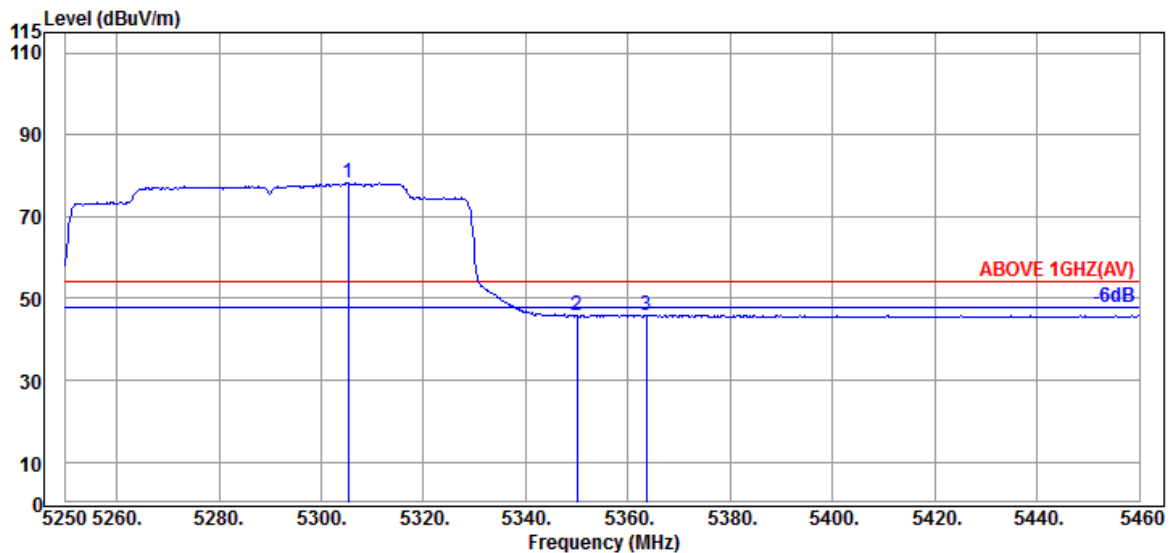


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.230	34.50	10.81	34.29	67.26	78.28	---	---	Average
5349.960	34.60	10.83	34.27	34.49	45.65	54.00	8.35	Average
5363.610	34.63	10.85	34.27	34.75	45.96	54.00	8.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

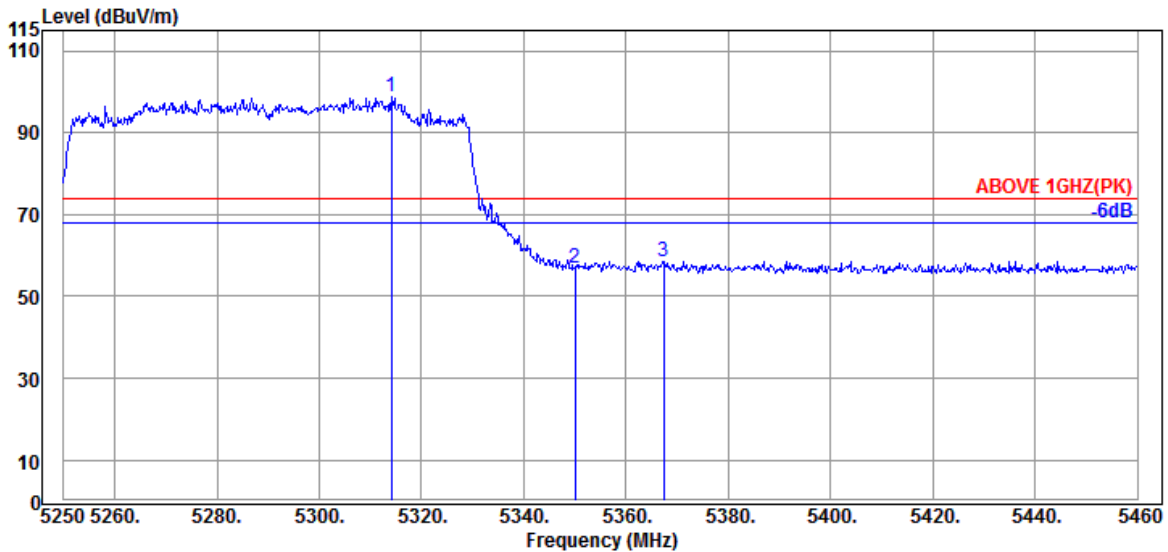

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.050	34.53	10.81	34.29	87.65	98.70	---	---	Peak
5349.960	34.60	10.83	34.27	45.90	57.06	74.00	16.94	Peak
5367.390	34.63	10.85	34.27	47.36	58.57	74.00	15.43	Peak

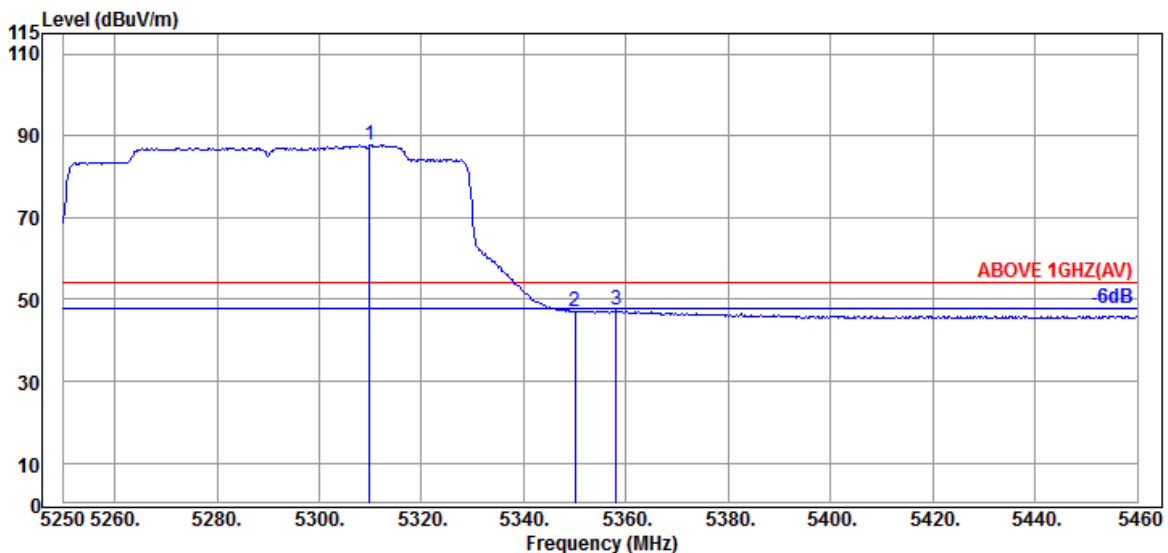


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.850	34.53	10.81	34.29	76.62	87.67	---	---	Average
5349.960	34.60	10.83	34.27	35.88	47.04	54.00	6.96	Average
5358.150	34.63	10.85	34.27	36.32	47.53	54.00	6.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

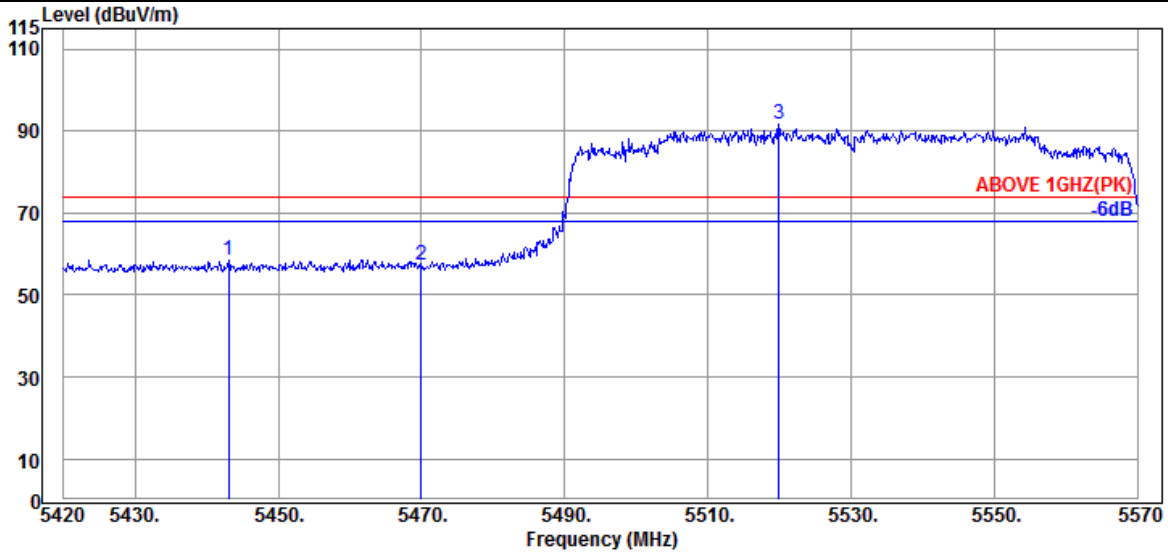

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.100	34.55	10.89	34.25	47.30	58.49	74.00	15.51	Peak
5469.950	34.47	10.91	34.24	46.26	57.40	74.00	16.60	Peak
@ 5519.900	34.37	10.93	34.24	80.74	91.80	---	---	Peak

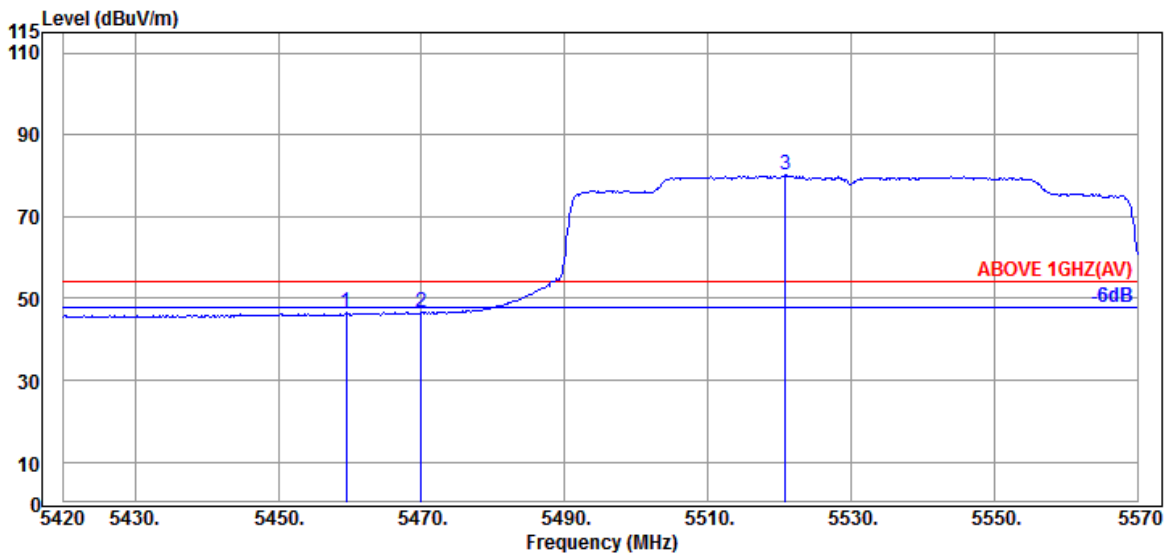


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.450	34.50	10.91	34.24	35.46	46.63	54.00	7.37	Average
5469.950	34.47	10.91	34.24	35.30	46.44	54.00	7.56	Average
@ 5520.800	34.37	10.93	34.24	69.08	80.14	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

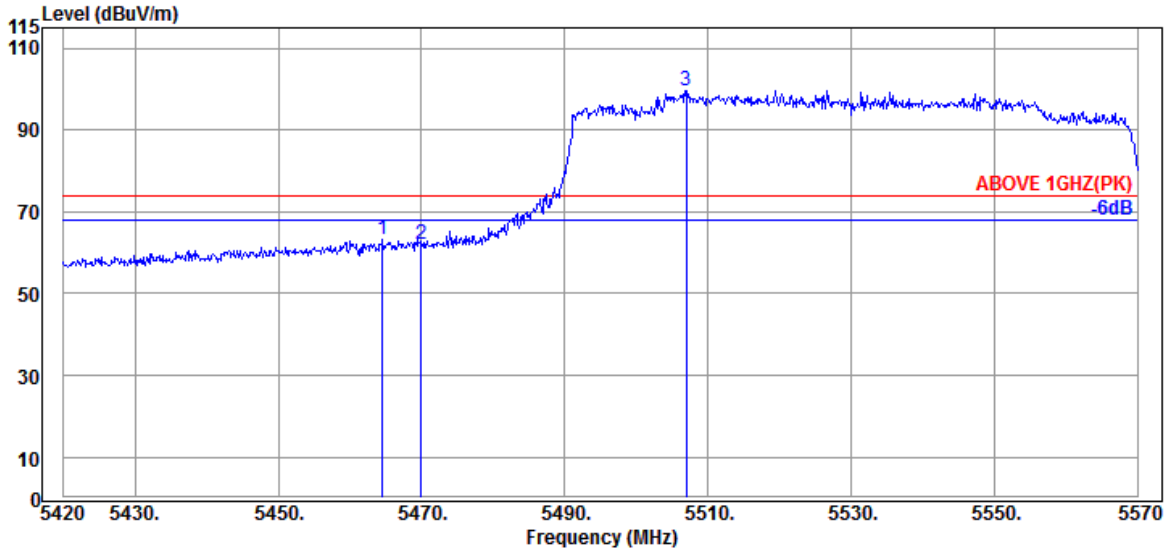

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.550	34.47	10.91	34.24	52.03	63.17	74.00	10.83	Peak
5469.950	34.47	10.91	34.24	50.71	61.85	74.00	12.15	Peak
@ 5507.000	34.40	10.93	34.24	88.65	99.74	---	---	Peak

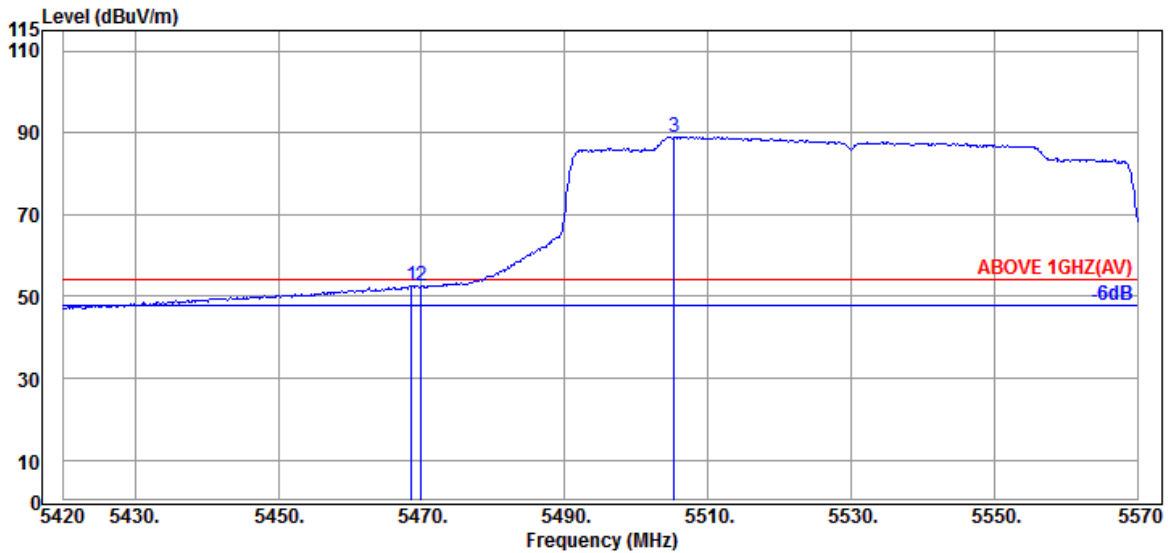


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.47	10.91	34.24	41.60	52.74	54.00	1.26	Average
5469.950	34.47	10.91	34.24	41.36	52.50	54.00	1.50	Average
@ 5505.350	34.40	10.93	34.24	77.94	89.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

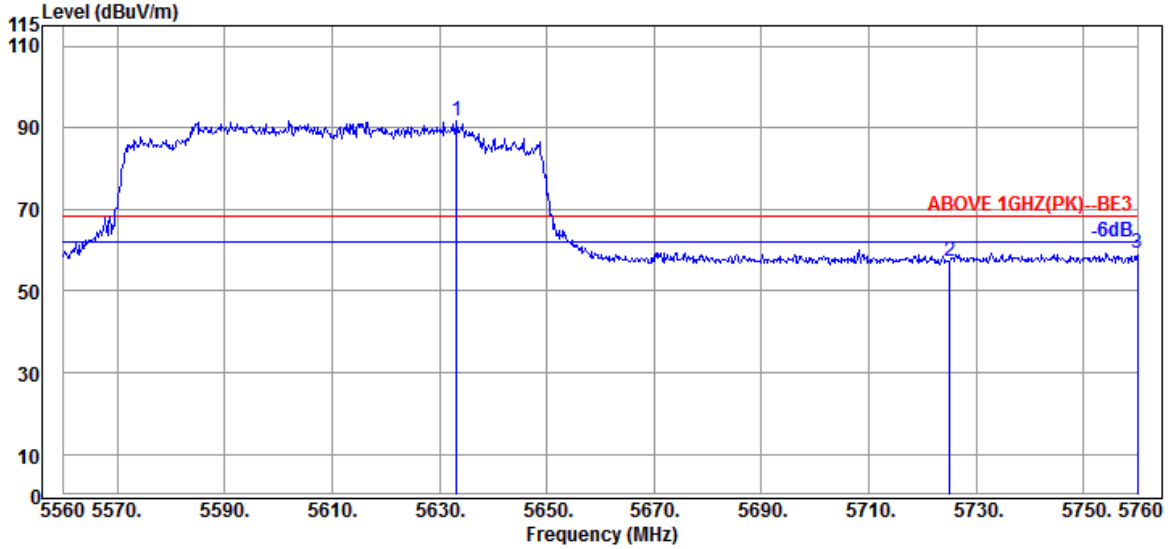

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.200	34.40	10.99	34.29	80.62	91.72	---	---	Peak
5725.000	34.67	11.05	34.32	45.81	57.21	68.20	10.99	Peak
5760.000	34.87	11.06	34.35	47.79	59.37	68.20	8.83	Peak

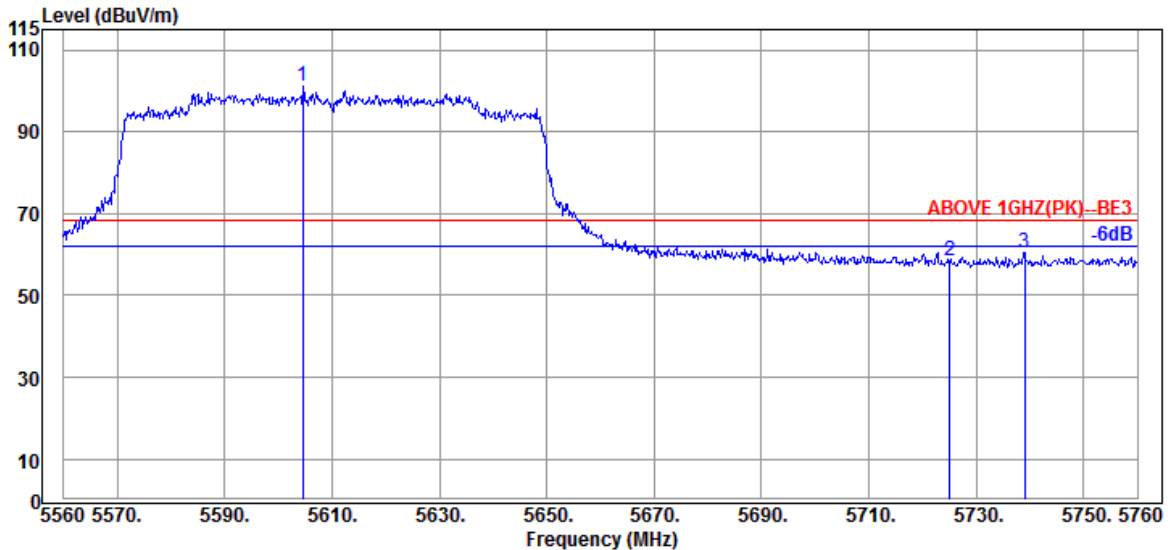


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5604.600	34.40	10.99	34.28	89.92	101.03	---	---	Peak
5725.000	34.67	11.05	34.32	46.89	58.29	68.20	9.91	Peak
5739.000	34.80	11.05	34.33	49.01	60.53	68.20	7.67	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

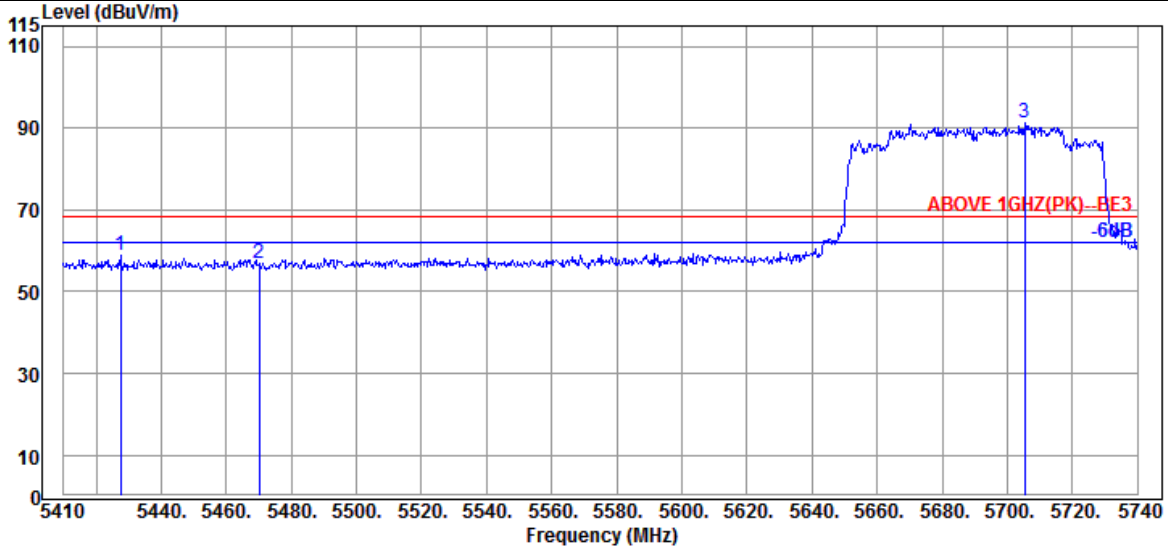

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.490	34.60	10.89	34.25	47.69	58.93	68.20	9.27	Peak
5470.060	34.47	10.91	34.24	45.74	56.88	68.20	11.32	Peak
@ 5705.350	34.40	11.03	34.32	80.18	91.29	---	---	Peak

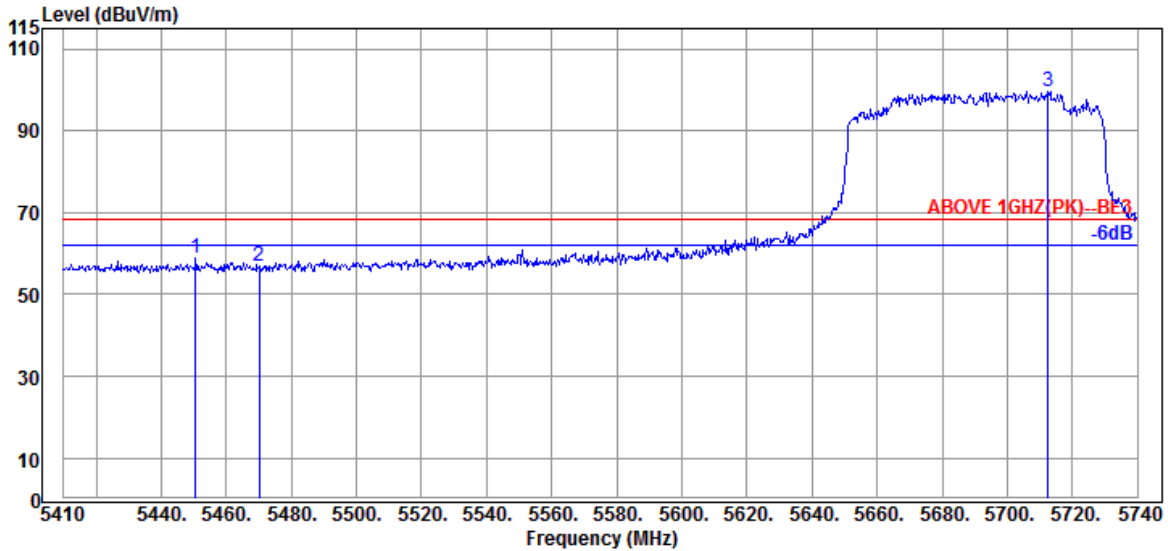


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.50	10.89	34.24	47.74	58.89	68.20	9.31	Peak
5470.060	34.47	10.91	34.24	45.81	56.95	68.20	11.25	Peak
@ 5712.610	34.53	11.05	34.32	88.34	99.60	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

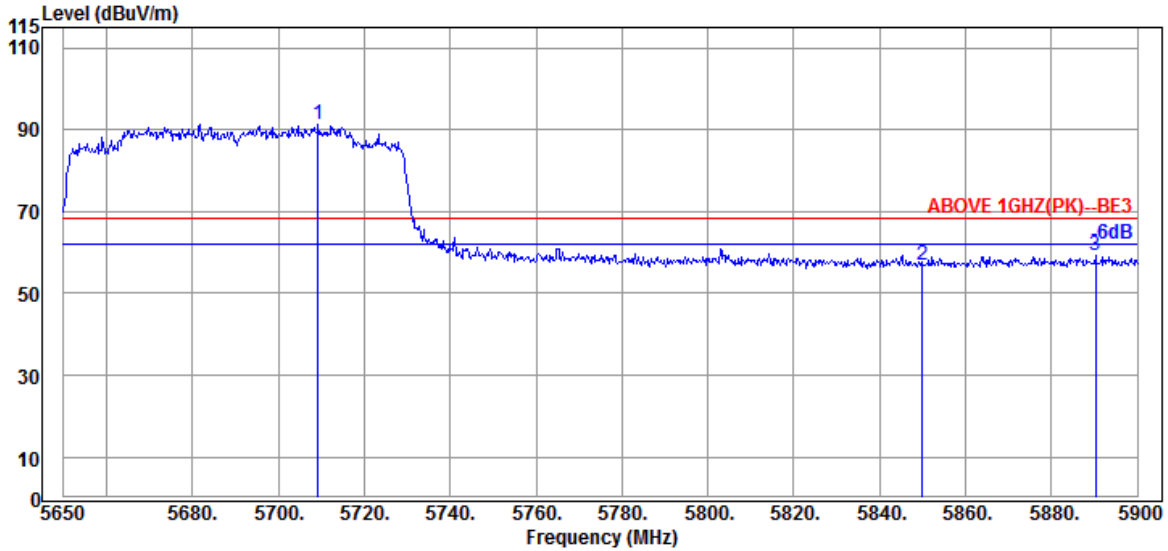

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.250	34.53	11.03	34.32	80.12	91.36	---	---	Peak
5850.000	35.10	11.10	34.38	45.27	57.09	68.20	11.11	Peak
5890.250	35.40	11.12	34.40	47.06	59.18	68.20	9.02	Peak

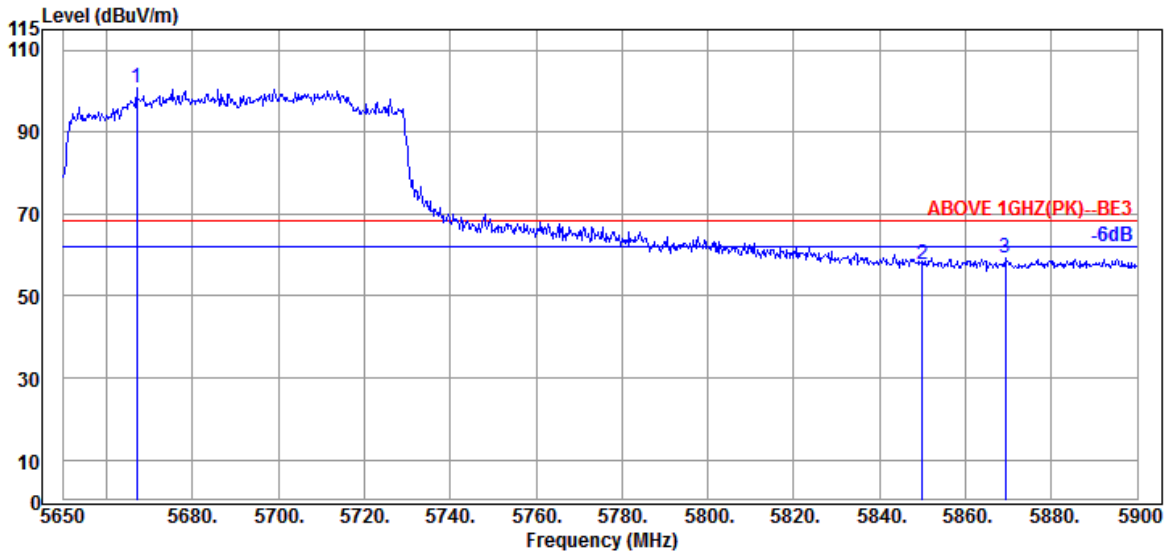


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.000	34.40	11.01	34.30	89.80	100.91	---	---	Peak
5850.000	35.10	11.10	34.38	45.80	57.62	68.20	10.58	Peak
5869.250	35.20	11.12	34.39	47.47	59.40	68.20	8.80	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

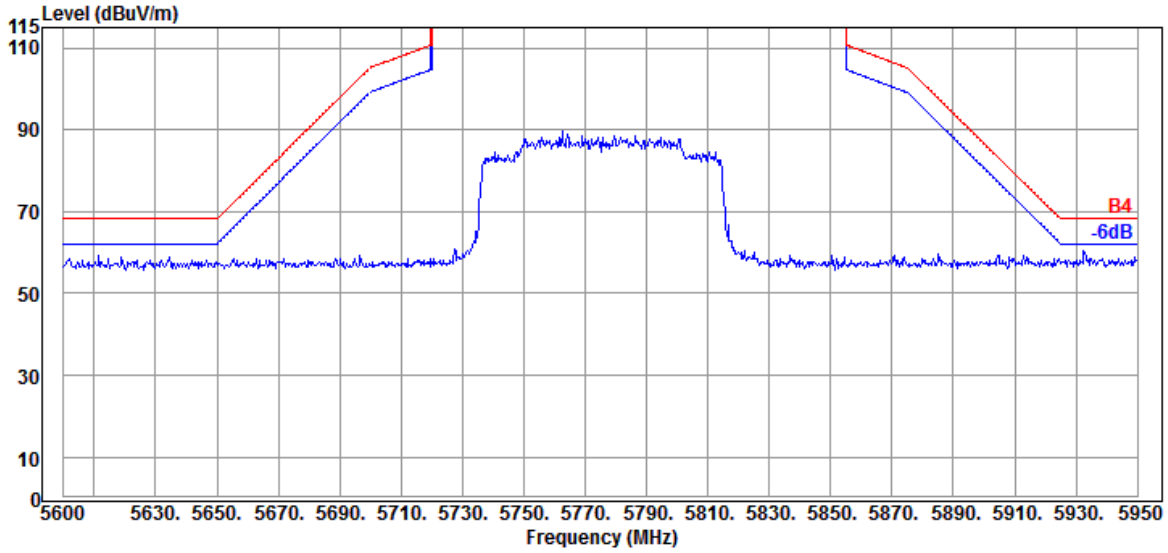

Antenna at Vertical Polarization

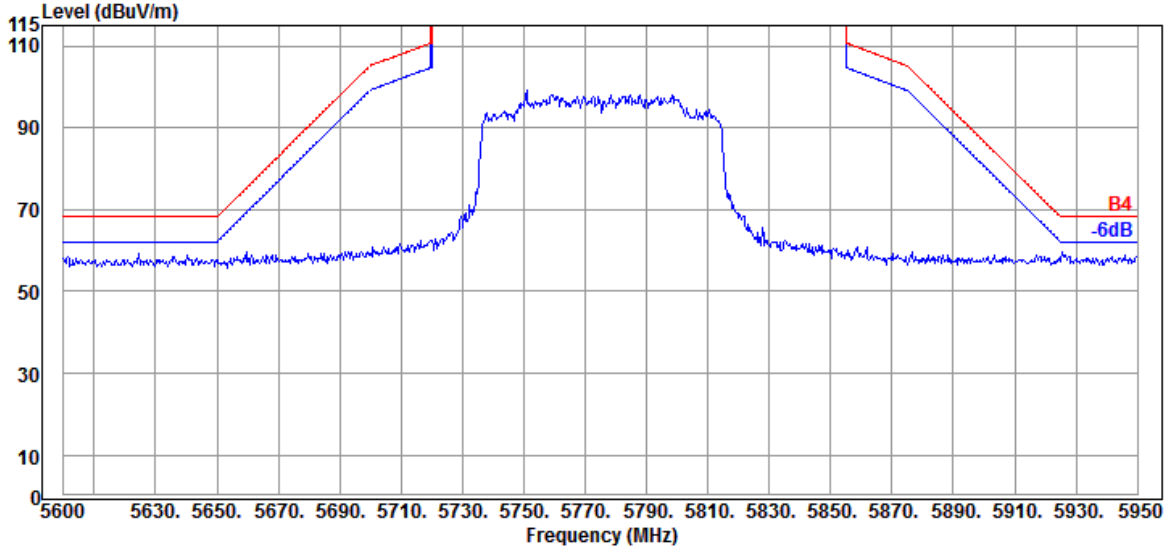


Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

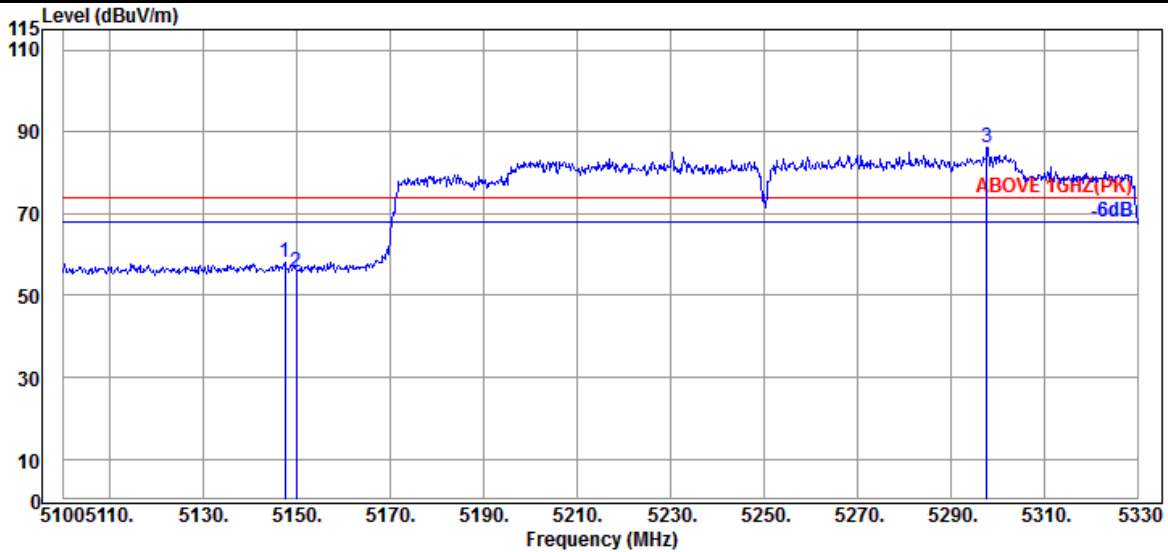

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	34.20	10.70	34.35	47.61	58.16	74.00	15.84	Peak
5149.910	34.20	10.70	34.35	45.24	55.79	74.00	18.21	Peak
@ 5297.800	34.50	10.81	34.29	75.31	86.33	---	---	Peak

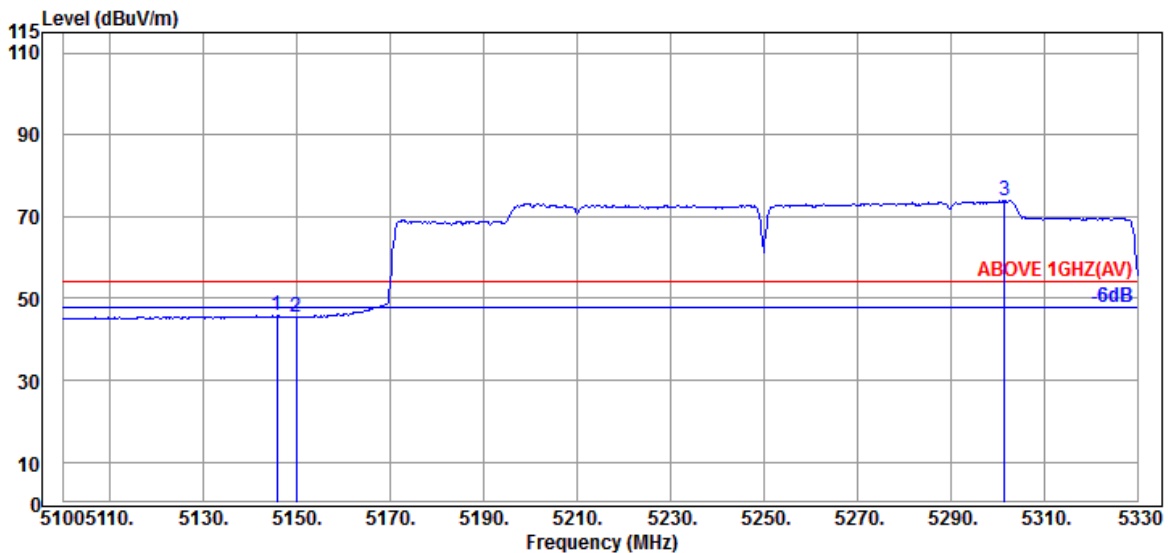


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.770	34.20	10.70	34.35	35.26	45.81	54.00	8.19	Average
5149.910	34.20	10.70	34.35	34.96	45.51	54.00	8.49	Average
@ 5301.480	34.50	10.81	34.29	63.07	74.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

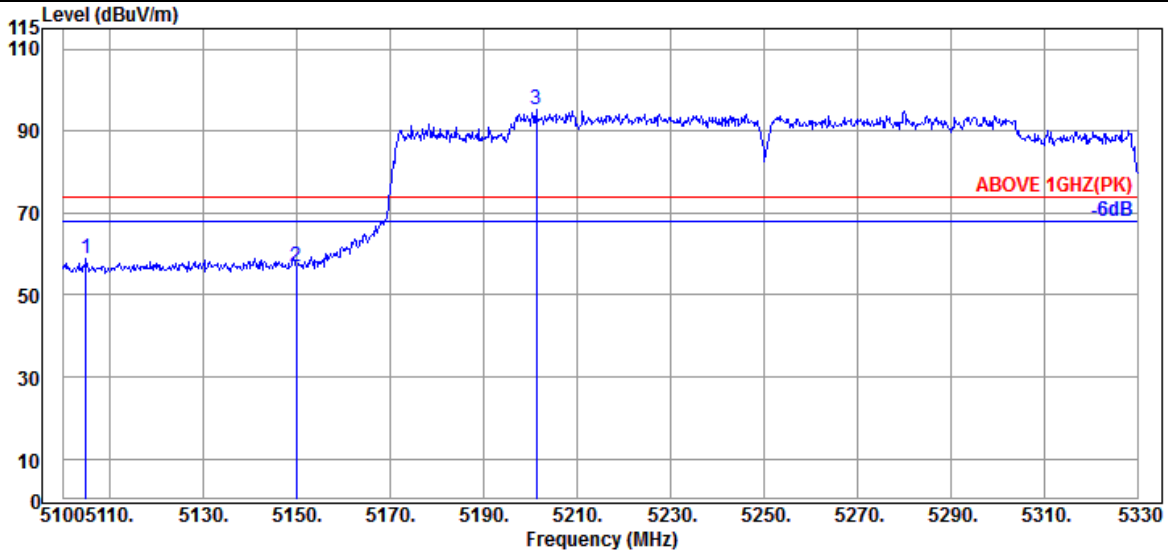

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.830	34.10	10.68	34.36	48.52	58.94	74.00	15.06	Peak
5149.910	34.20	10.70	34.35	46.31	56.86	74.00	17.14	Peak
@ 5201.200	34.20	10.74	34.33	84.54	95.15	---	---	Peak

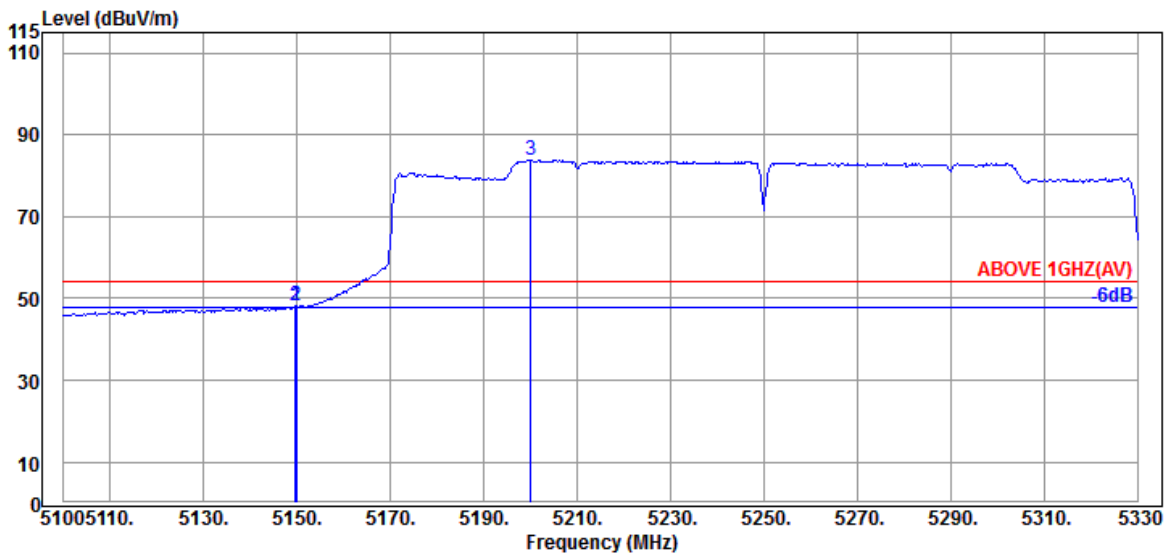


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	10.70	34.35	37.58	48.13	54.00	5.87	Average
5149.910	34.20	10.70	34.35	37.48	48.03	54.00	5.97	Average
@ 5200.050	34.20	10.74	34.33	73.32	83.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

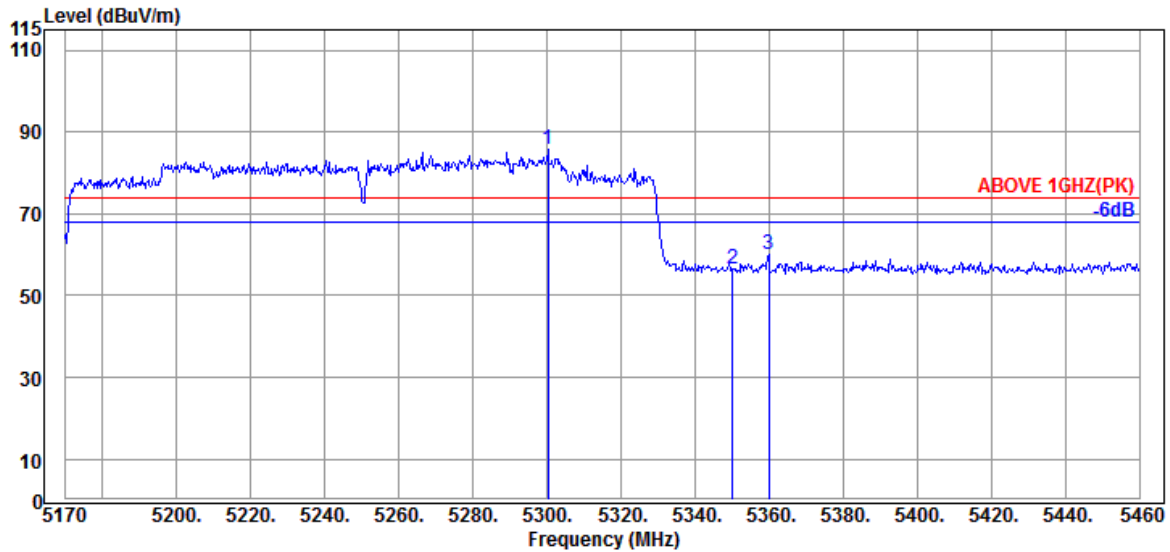

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.210	34.50	10.81	34.29	74.80	85.82	---	---	Peak
5350.090	34.60	10.83	34.27	45.36	56.52	74.00	17.48	Peak
5359.950	34.63	10.85	34.27	48.71	59.92	74.00	14.08	Peak

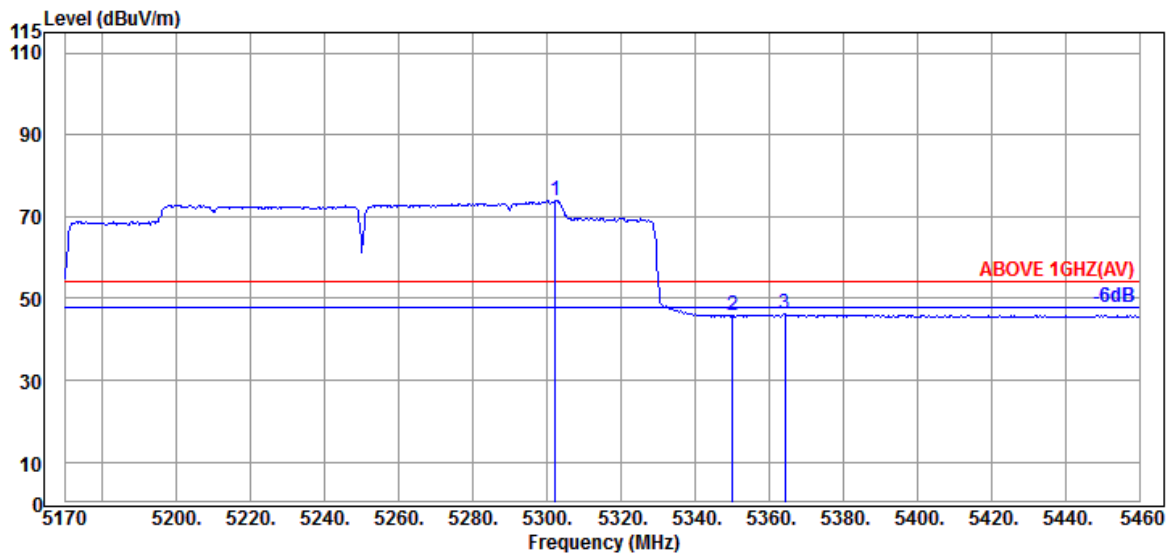


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.50	10.81	34.29	62.88	73.90	---	---	Average
5350.090	34.60	10.83	34.27	34.54	45.70	54.00	8.30	Average
5364.300	34.63	10.85	34.27	34.94	46.15	54.00	7.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

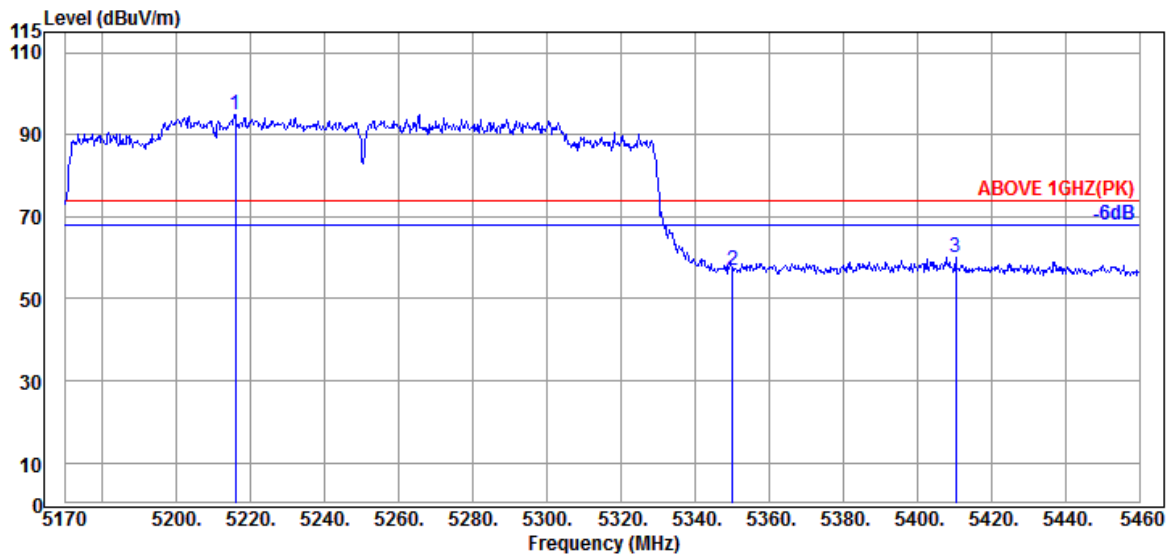

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5215.820	34.25	10.74	34.33	84.16	94.82	---	---	Peak
5350.090	34.60	10.83	34.27	45.87	57.03	74.00	16.97	Peak
5410.410	34.65	10.87	34.26	48.88	60.14	74.00	13.86	Peak

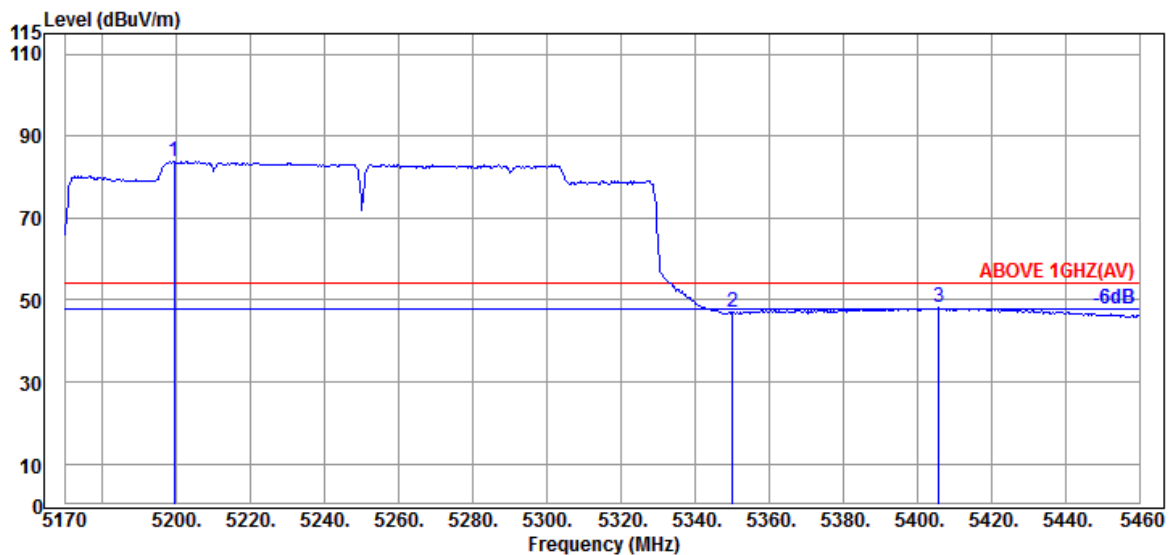


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5199.290	34.20	10.74	34.33	73.13	83.74	---	---	Average
5350.090	34.60	10.83	34.27	35.73	46.89	54.00	7.11	Average
5405.770	34.65	10.87	34.26	36.78	48.04	54.00	5.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

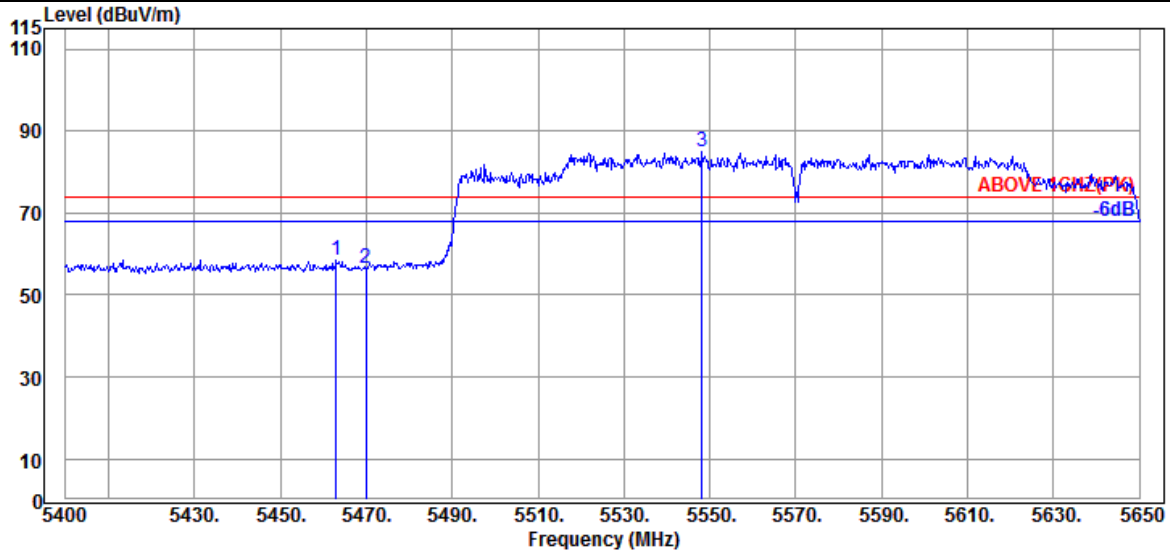

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.000	34.50	10.91	34.24	47.48	58.65	74.00	15.35	Peak
5470.000	34.47	10.91	34.24	45.40	56.54	74.00	17.46	Peak
@ 5548.250	34.30	10.95	34.25	73.97	84.97	---	---	Peak

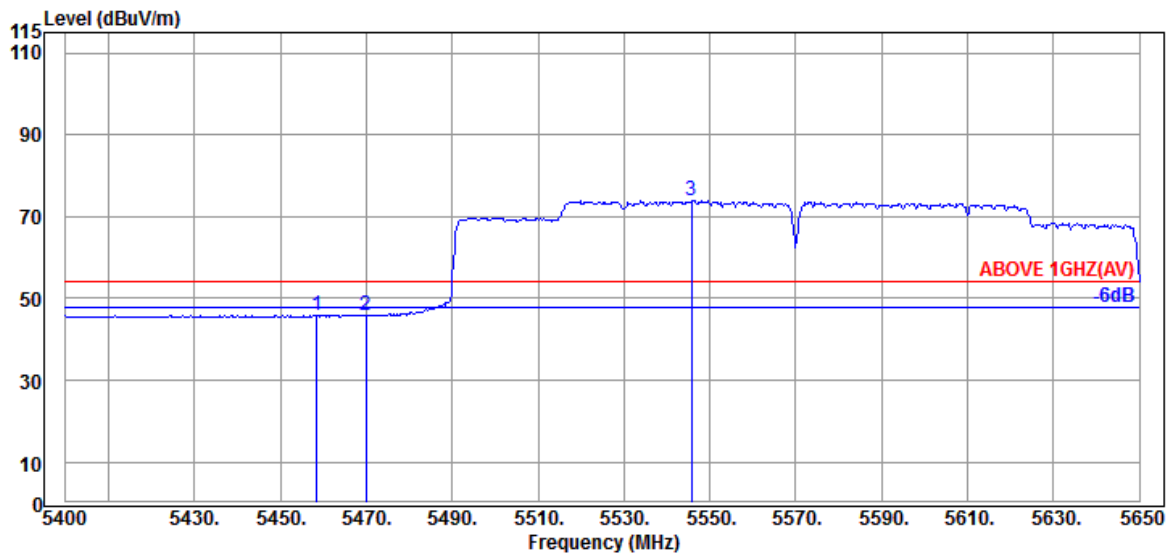


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.500	34.50	10.89	34.24	34.86	46.01	54.00	7.99	Average
5470.000	34.47	10.91	34.24	34.83	45.97	54.00	8.03	Average
@ 5545.750	34.30	10.95	34.25	63.02	74.02	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

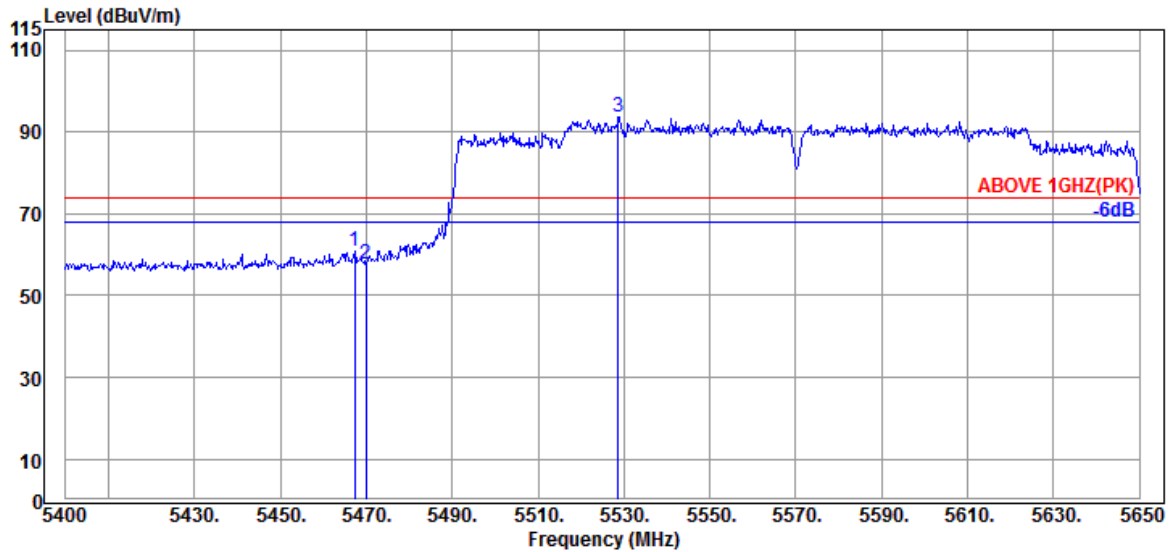

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.47	10.91	34.24	49.68	60.82	74.00	13.18	Peak
5470.000	34.47	10.91	34.24	46.72	57.86	74.00	16.14	Peak
@ 5528.750	34.33	10.93	34.25	82.71	93.72	---	---	Peak

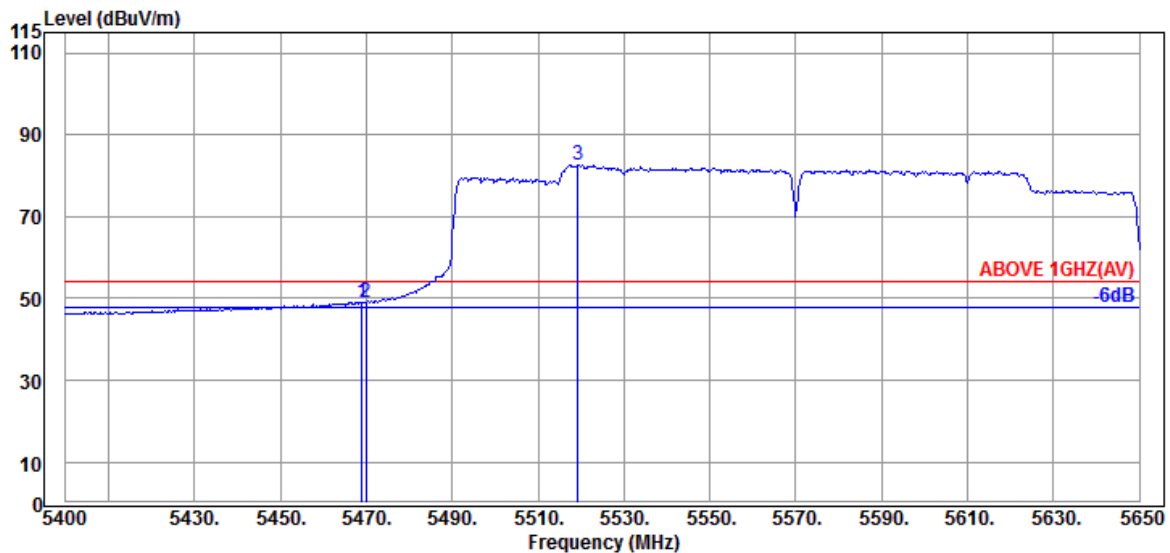


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	37.87	49.01	54.00	4.99	Average
5470.000	34.47	10.91	34.24	37.87	49.01	54.00	4.99	Average
@ 5519.250	34.37	10.93	34.24	71.52	82.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

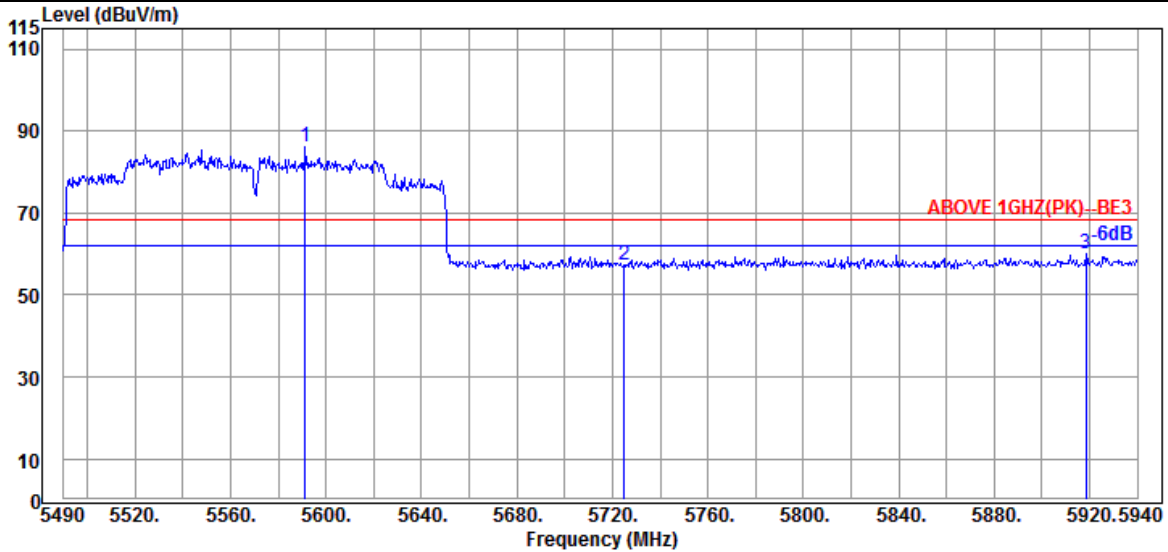

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.250	34.37	10.97	34.27	75.10	86.17	---	---	Peak
5724.900	34.67	11.05	34.32	45.92	57.32	68.20	10.88	Peak
5918.400	35.37	11.14	34.41	48.00	60.10	68.20	8.10	Peak

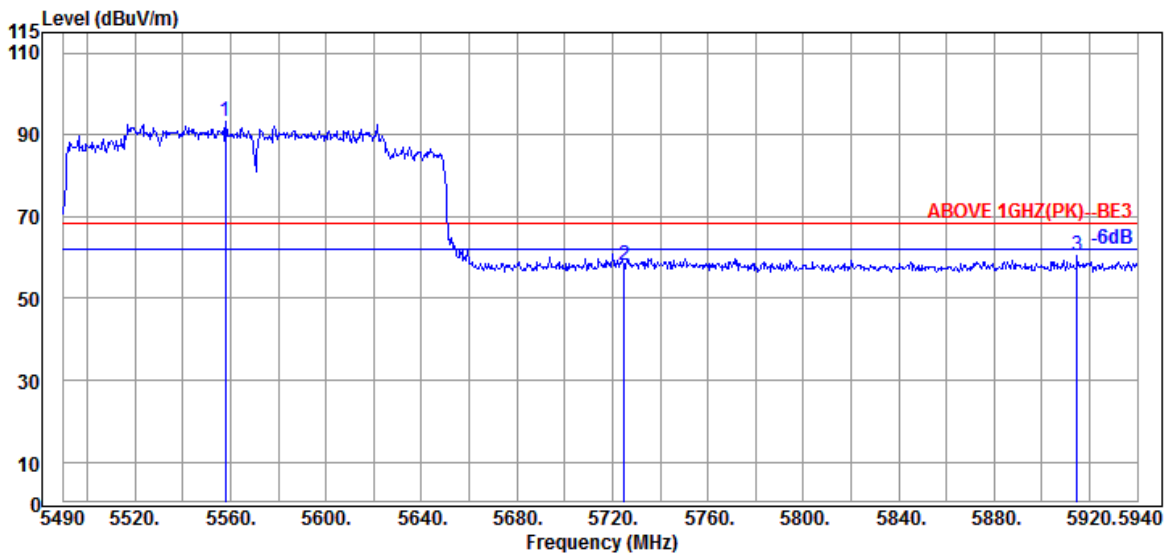


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5557.950	34.30	10.95	34.26	82.29	93.28	---	---	Peak
5724.900	34.67	11.05	34.32	46.88	58.28	68.20	9.92	Peak
5914.800	35.37	11.14	34.41	48.39	60.49	68.20	7.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

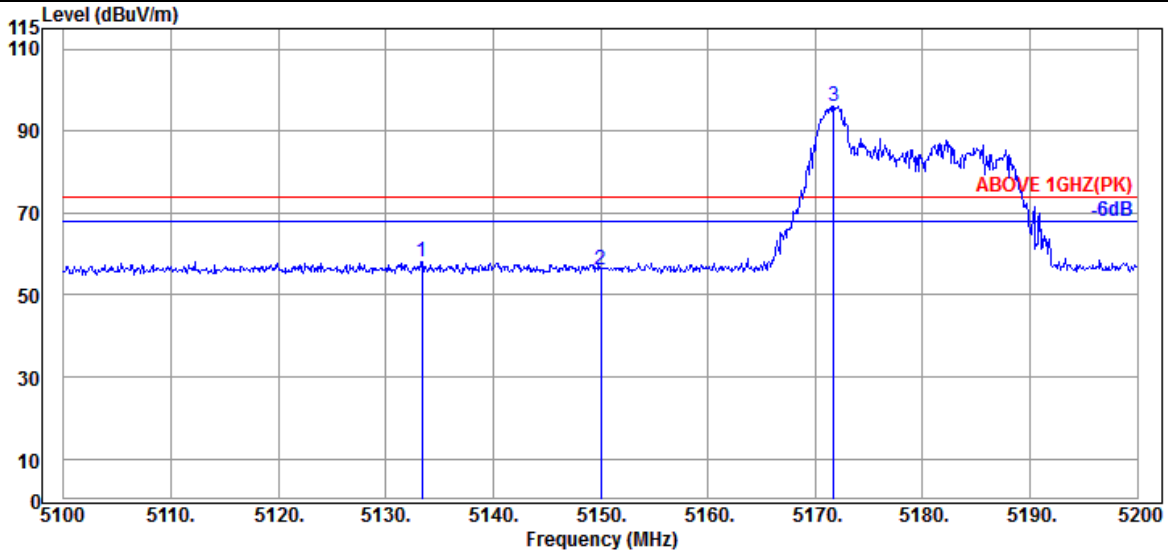

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5133.400	34.17	10.70	34.36	47.75	58.26	74.00	15.74	Peak
5150.000	34.20	10.70	34.35	45.61	56.16	74.00	17.84	Peak
@ 5171.700	34.20	10.72	34.34	85.60	96.18	---	---	Peak

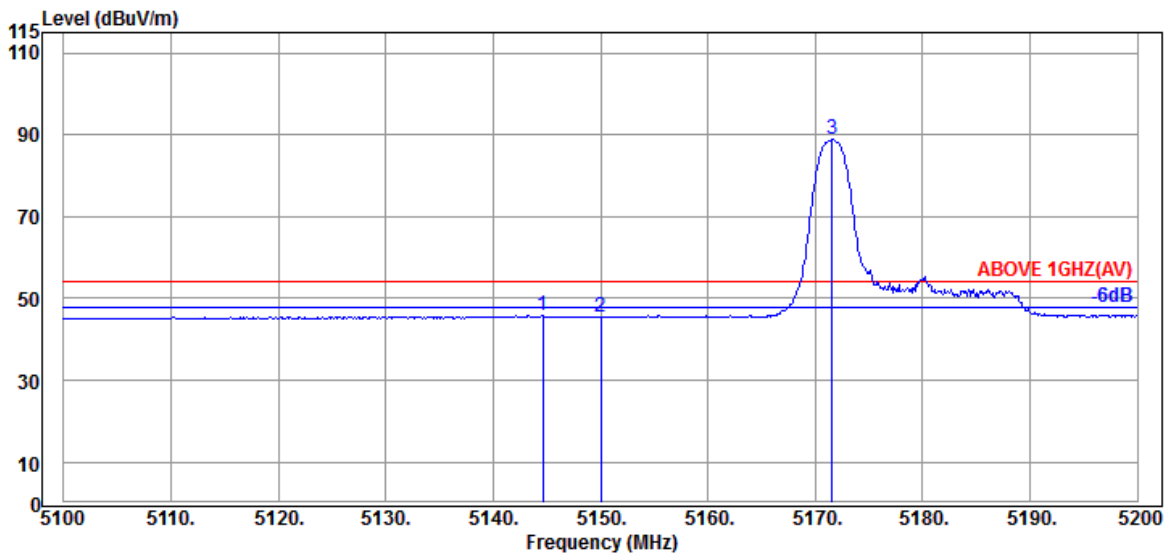


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.600	34.20	10.70	34.35	35.18	45.73	54.00	8.27	Average
5150.000	34.20	10.70	34.35	34.85	45.40	54.00	8.60	Average
@ 5171.600	34.20	10.72	34.34	78.38	88.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

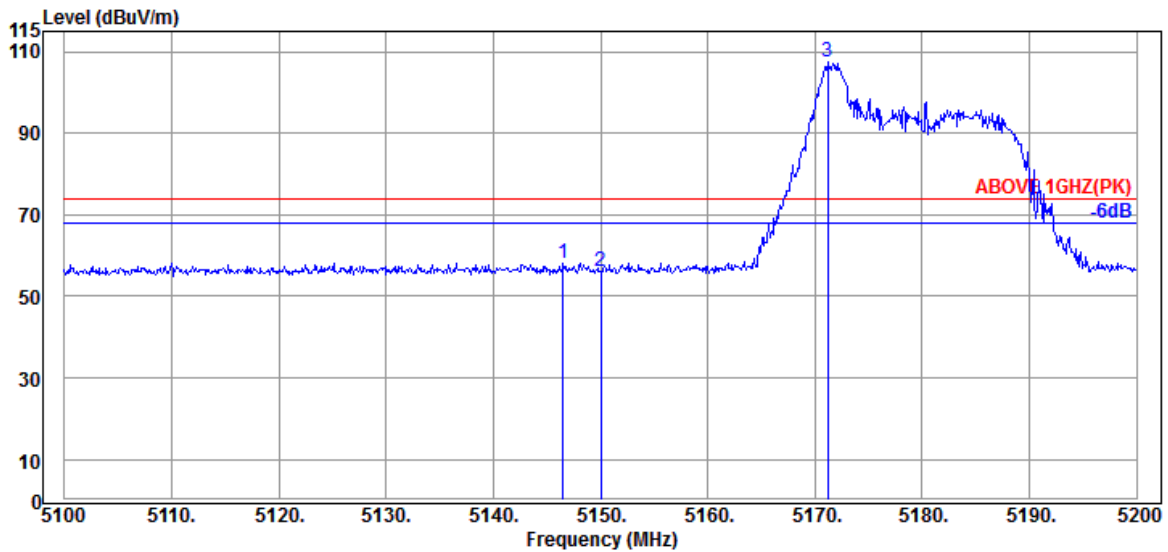

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.20	10.70	34.35	47.48	58.03	74.00	15.97	Peak
5150.000	34.20	10.70	34.35	45.46	56.01	74.00	17.99	Peak
@ 5171.200	34.20	10.72	34.34	96.75	107.33	---	---	Peak

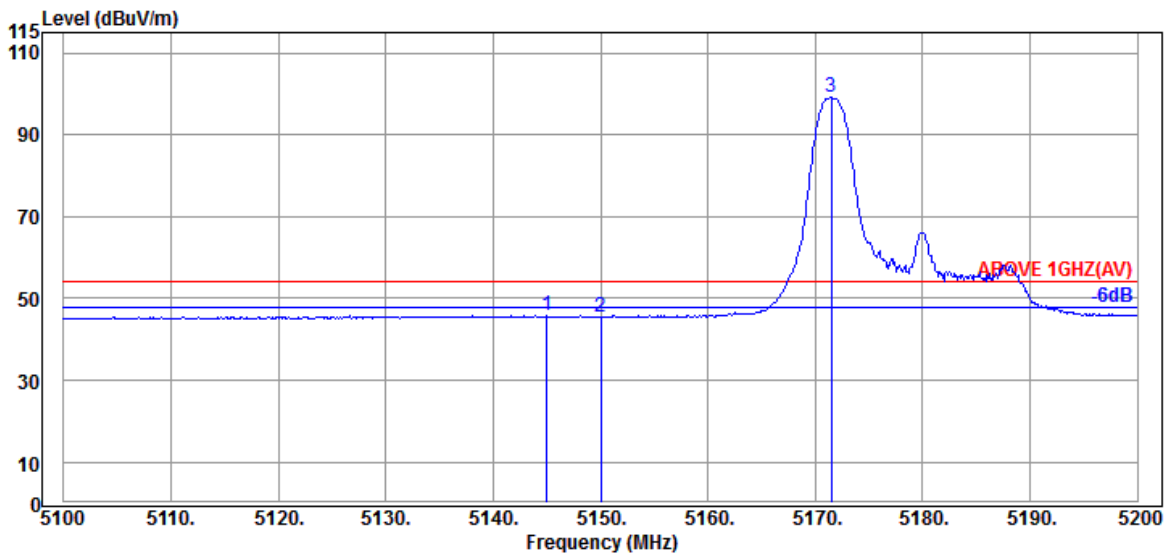


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.20	10.70	34.35	35.24	45.79	54.00	8.21	Average
5150.000	34.20	10.70	34.35	34.98	45.53	54.00	8.47	Average
@ 5171.500	34.20	10.72	34.34	88.65	99.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

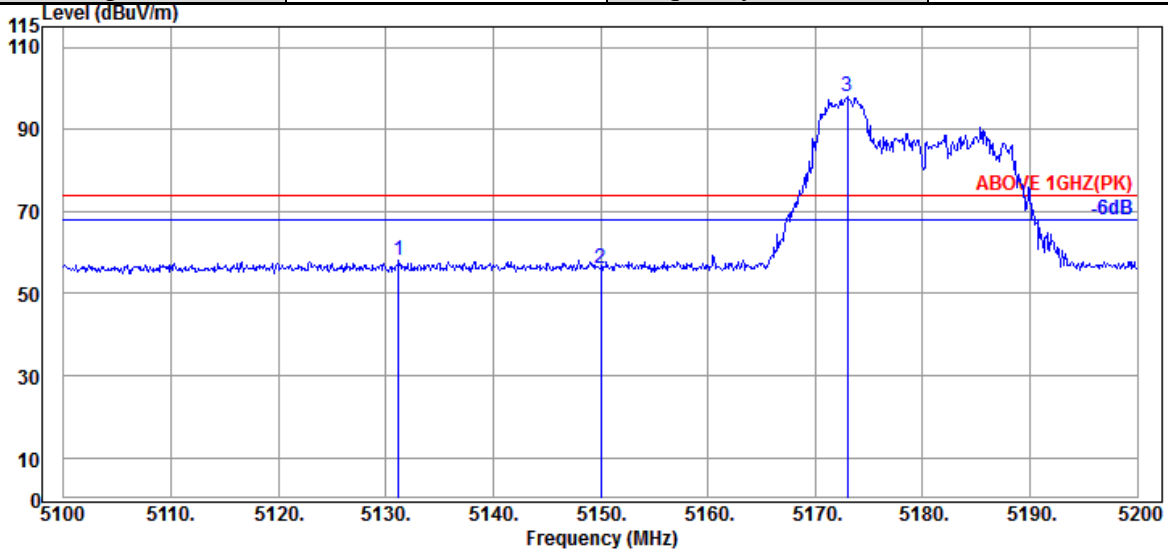

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.200	34.17	10.70	34.36	47.57	58.08	74.00	15.92	Peak
5150.000	34.20	10.70	34.35	45.48	56.03	74.00	17.97	Peak
@ 5173.000	34.20	10.72	34.34	87.58	98.16	---	---	Peak

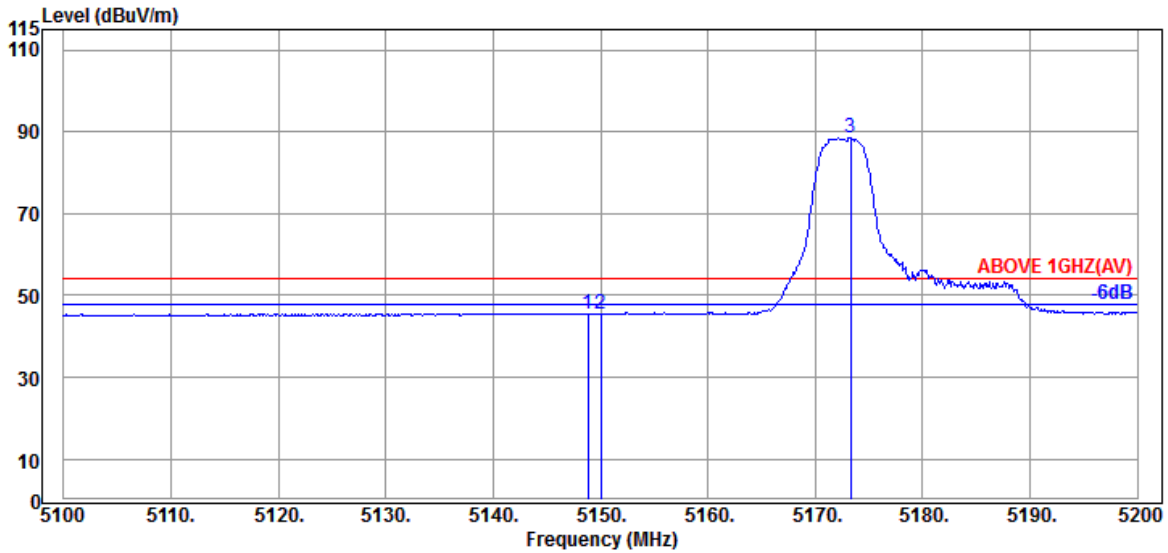


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	10.70	34.35	35.07	45.62	54.00	8.38	Average
5150.000	34.20	10.70	34.35	34.90	45.45	54.00	8.55	Average
@ 5173.300	34.20	10.72	34.34	77.90	88.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

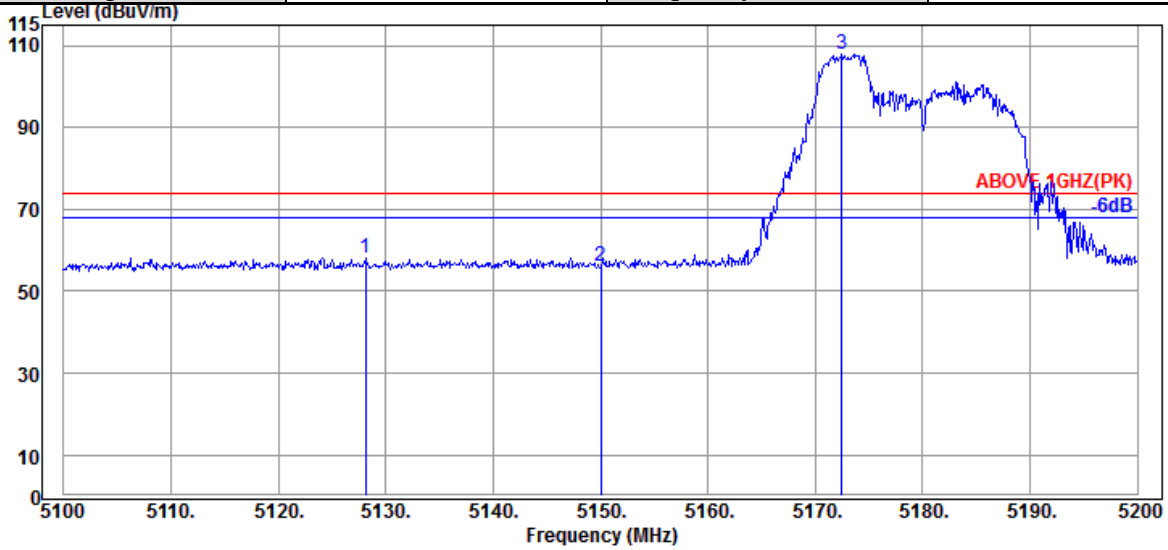

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.100	34.17	10.70	34.36	47.58	58.09	74.00	15.91	Peak
5150.000	34.20	10.70	34.35	45.50	56.05	74.00	17.95	Peak
@ 5172.500	34.20	10.72	34.34	97.30	107.88	---	---	Peak

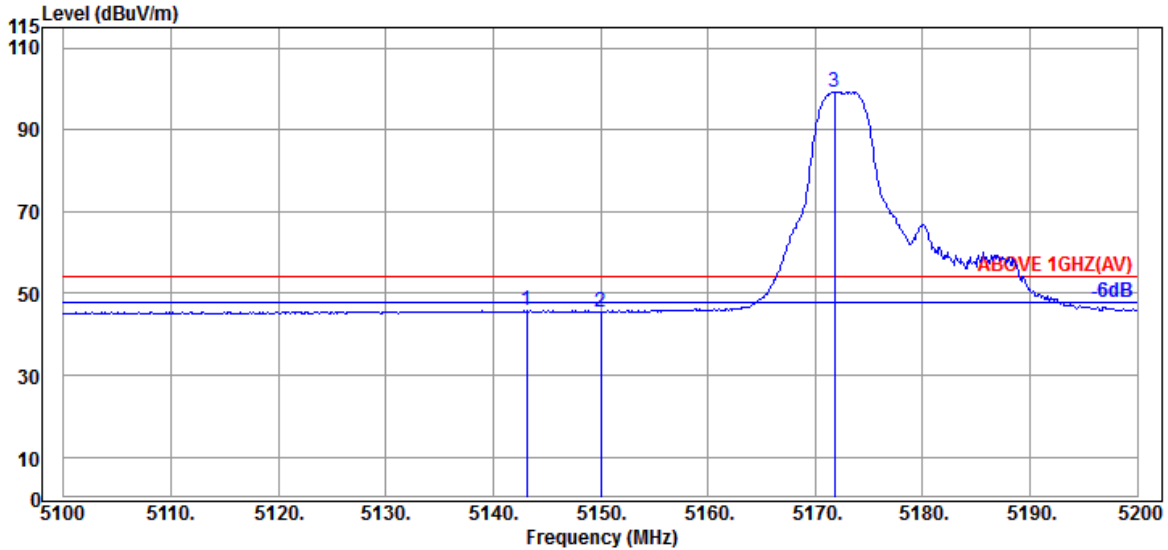


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	34.20	10.70	34.36	35.34	45.88	54.00	8.12	Average
5150.000	34.20	10.70	34.35	35.03	45.58	54.00	8.42	Average
@ 5171.800	34.20	10.72	34.34	88.64	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

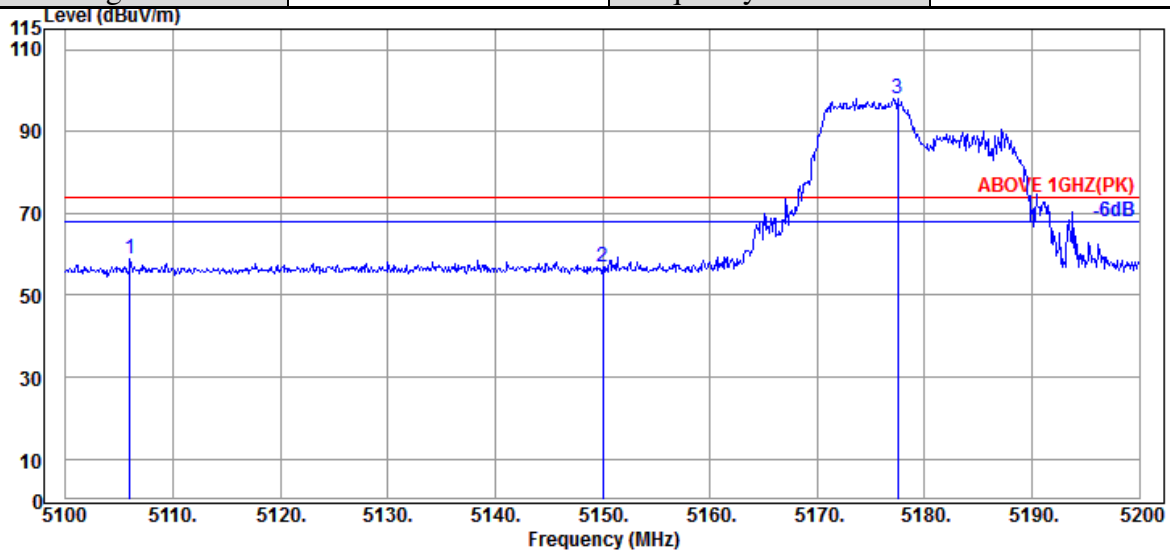

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.000	34.10	10.68	34.36	48.39	58.81	74.00	15.19	Peak
5150.000	34.20	10.70	34.35	46.26	56.81	74.00	17.19	Peak
@ 5177.500	34.20	10.72	34.34	87.49	98.07	---	---	Peak

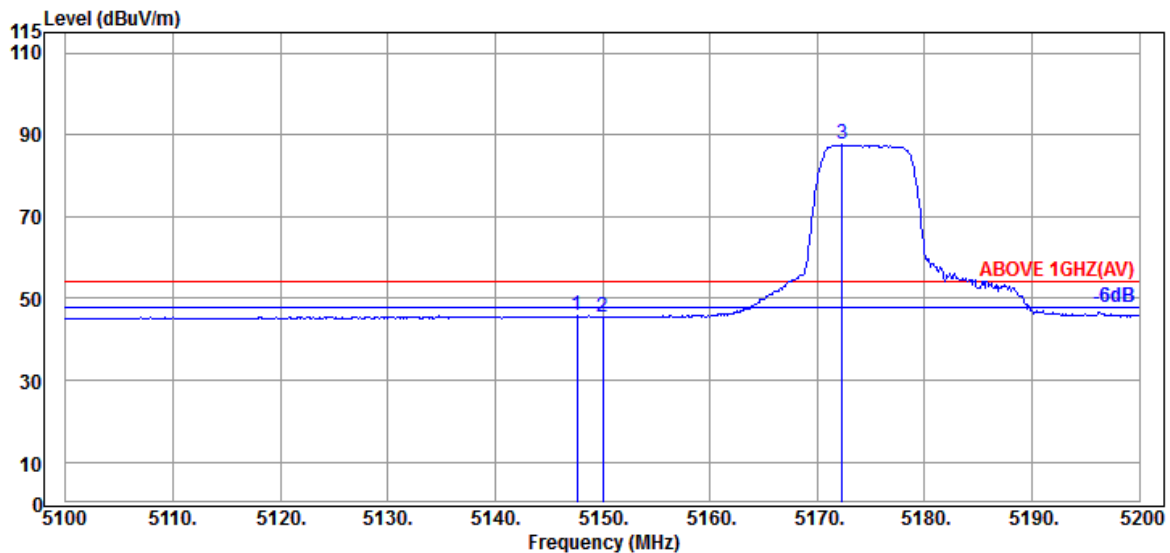


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	34.20	10.70	34.35	35.19	45.74	54.00	8.26	Average
5150.000	34.20	10.70	34.35	34.96	45.51	54.00	8.49	Average
@ 5172.300	34.20	10.72	34.34	77.11	87.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

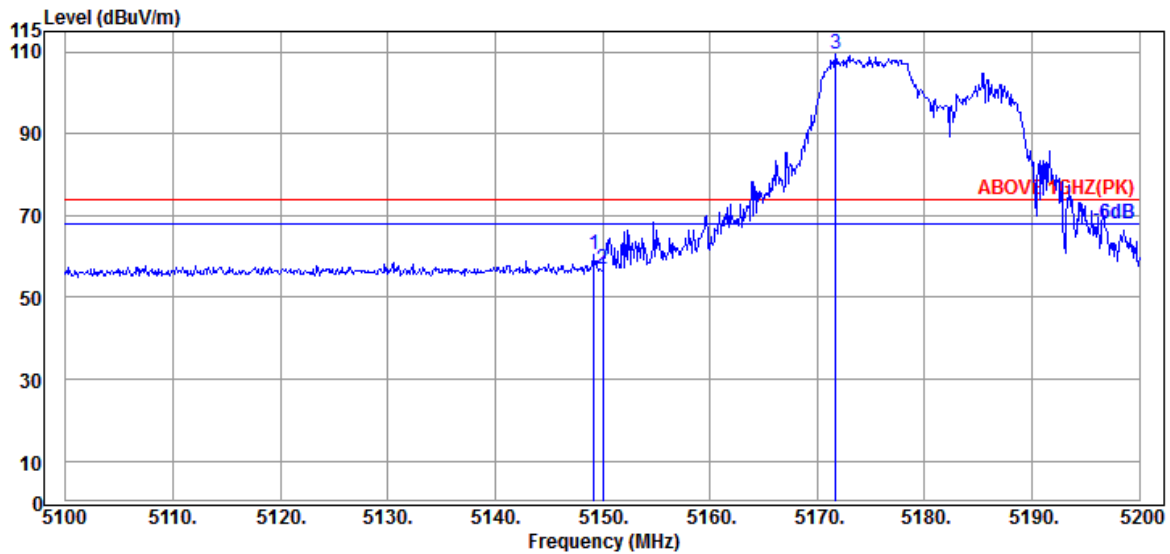

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	49.77	60.32	74.00	13.68	Peak
5150.000	34.20	10.70	34.35	46.17	56.72	74.00	17.28	Peak
@ 5171.700	34.20	10.72	34.34	98.93	109.51	---	---	Peak

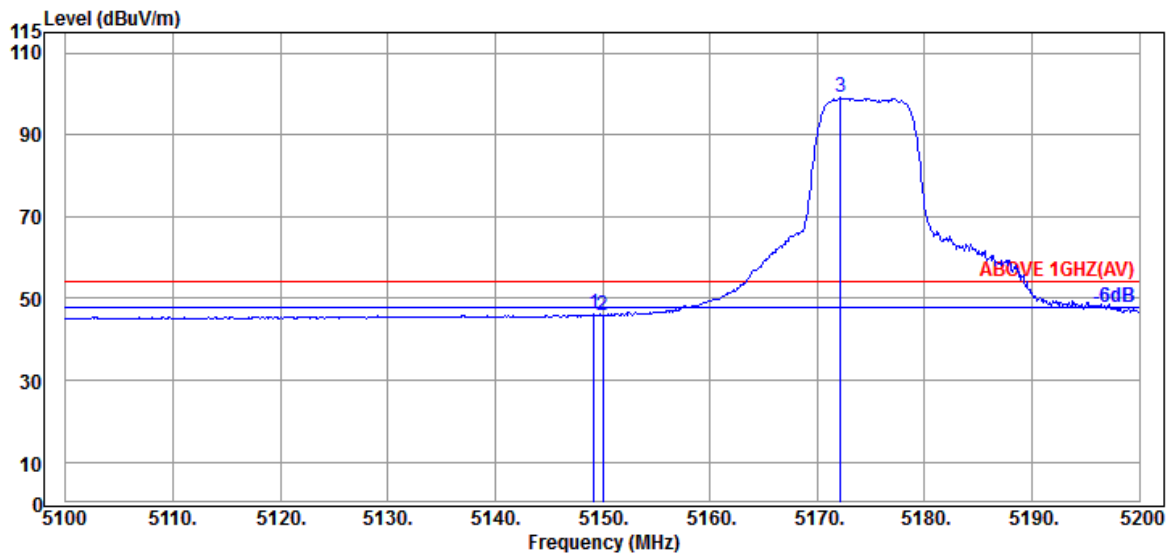


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	35.49	46.04	54.00	7.96	Average
5150.000	34.20	10.70	34.35	35.36	45.91	54.00	8.09	Average
@ 5172.200	34.20	10.72	34.34	88.44	99.02	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

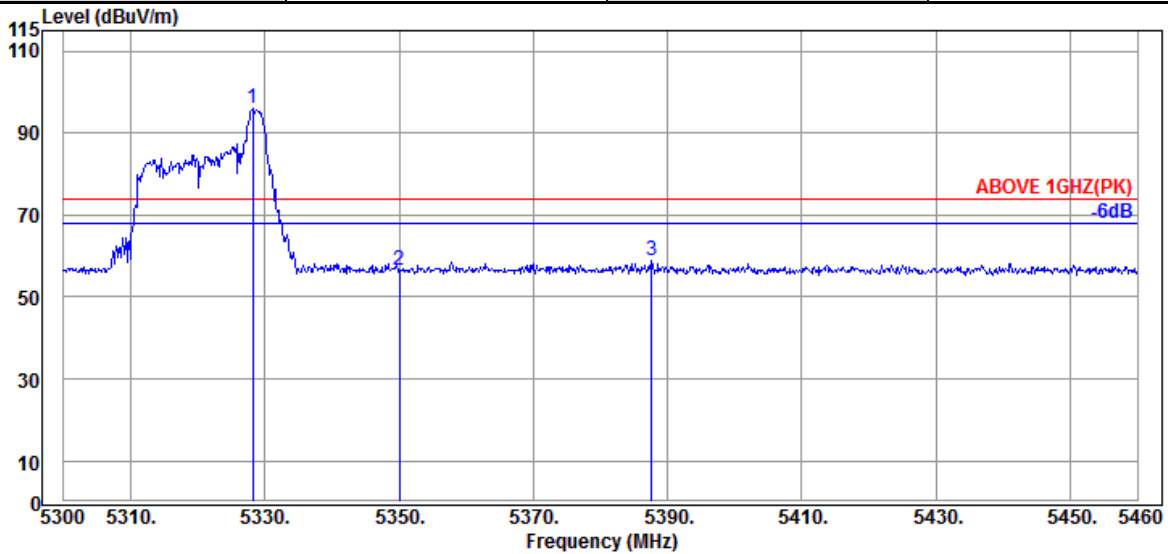

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	10.83	34.28	84.98	96.10	---	---	Peak
5350.080	34.60	10.83	34.27	45.45	56.61	74.00	17.39	Peak
5387.680	34.70	10.85	34.27	47.41	58.69	74.00	15.31	Peak

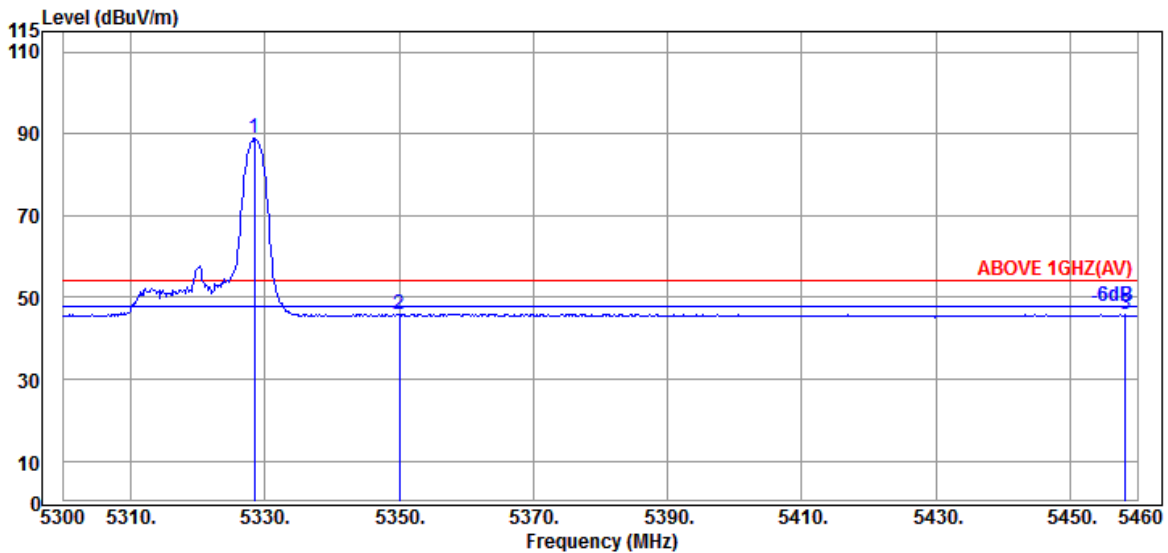


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	77.70	88.82	---	---	Average
5350.080	34.60	10.83	34.27	34.67	45.83	54.00	8.17	Average
5458.240	34.50	10.89	34.24	34.78	45.93	54.00	8.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

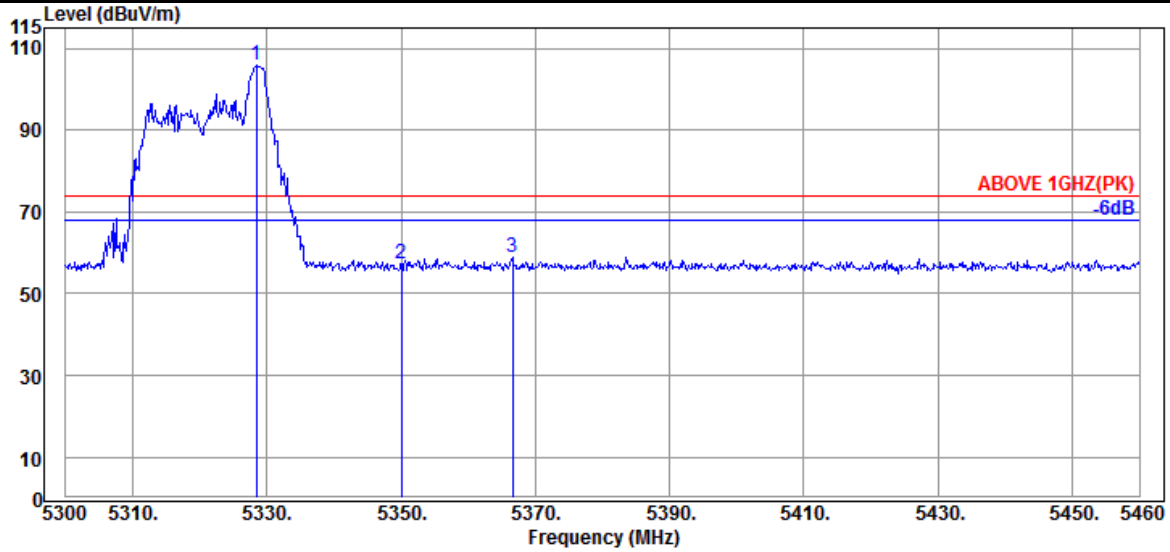

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	94.68	105.80	---	---	Peak
5350.080	34.60	10.83	34.27	46.18	57.34	74.00	16.66	Peak
5366.560	34.63	10.85	34.27	47.86	59.07	74.00	14.93	Peak

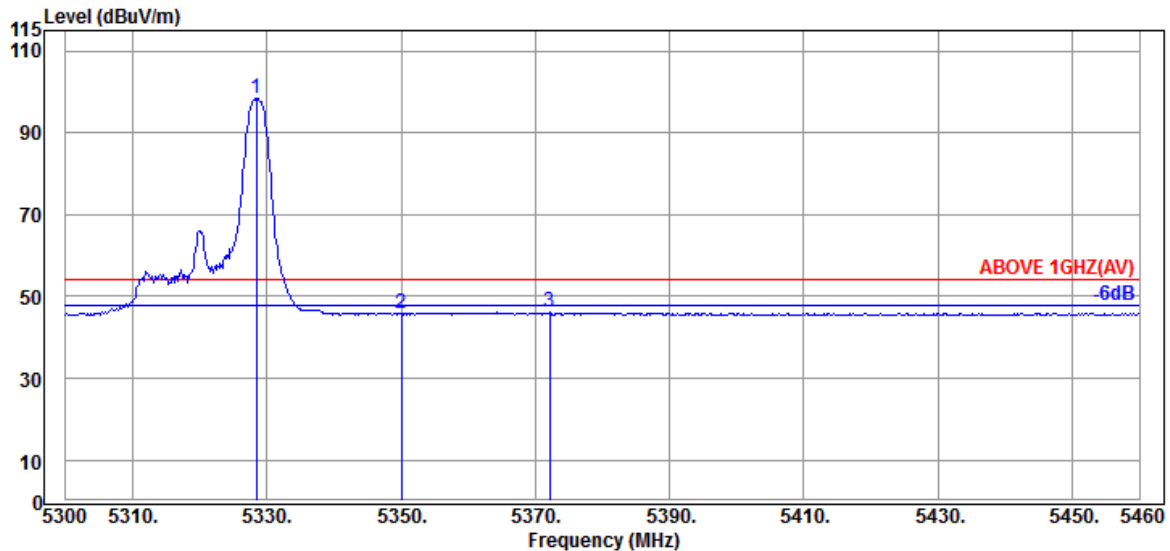


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	87.34	98.46	---	---	Average
5350.080	34.60	10.83	34.27	34.52	45.68	54.00	8.32	Average
5372.160	34.67	10.85	34.27	34.91	46.16	54.00	7.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

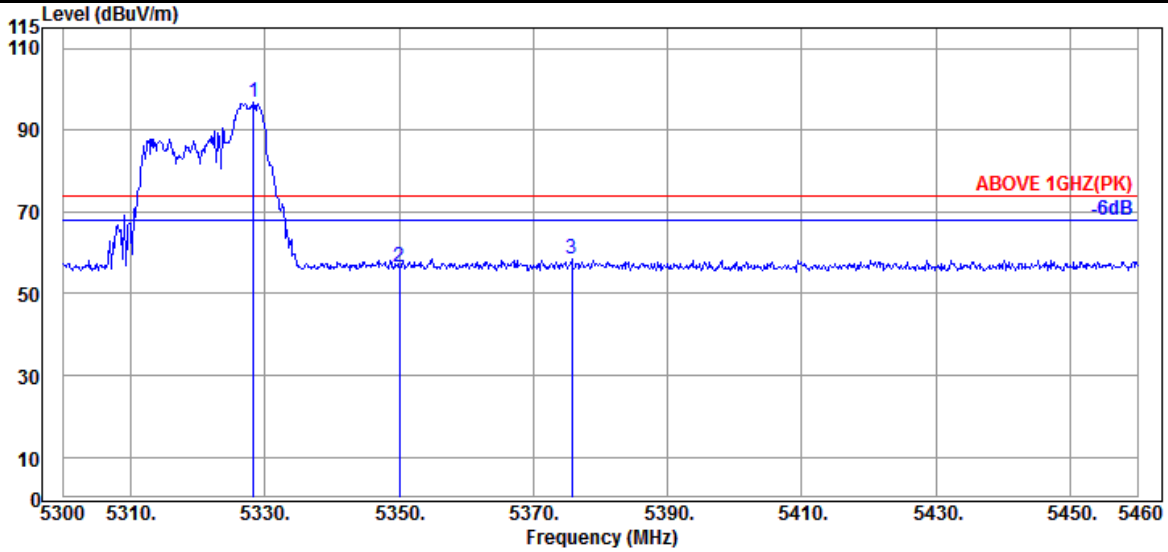

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	10.83	34.28	85.87	96.99	---	---	Peak
5350.080	34.60	10.83	34.27	45.41	56.57	74.00	17.43	Peak
5375.680	34.67	10.85	34.27	47.43	58.68	74.00	15.32	Peak

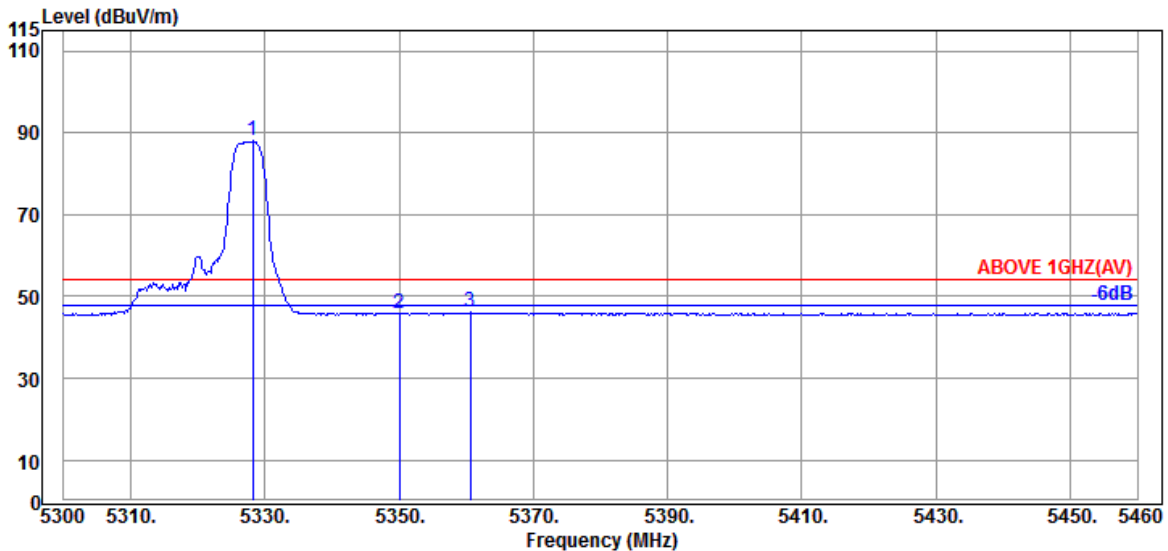


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	10.83	34.28	76.83	87.95	---	---	Average
5350.080	34.60	10.83	34.27	34.58	45.74	54.00	8.26	Average
5360.640	34.63	10.85	34.27	34.89	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

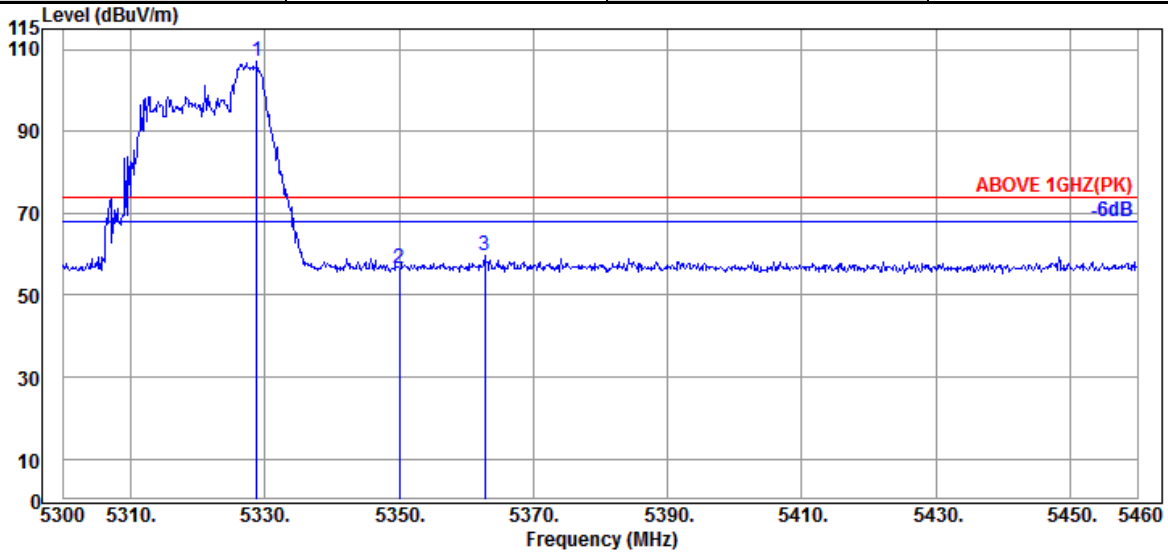

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.57	10.83	34.28	95.98	107.10	---	---	Peak
5350.080	34.60	10.83	34.27	45.30	56.46	74.00	17.54	Peak
5362.720	34.63	10.85	34.27	48.50	59.71	74.00	14.29	Peak

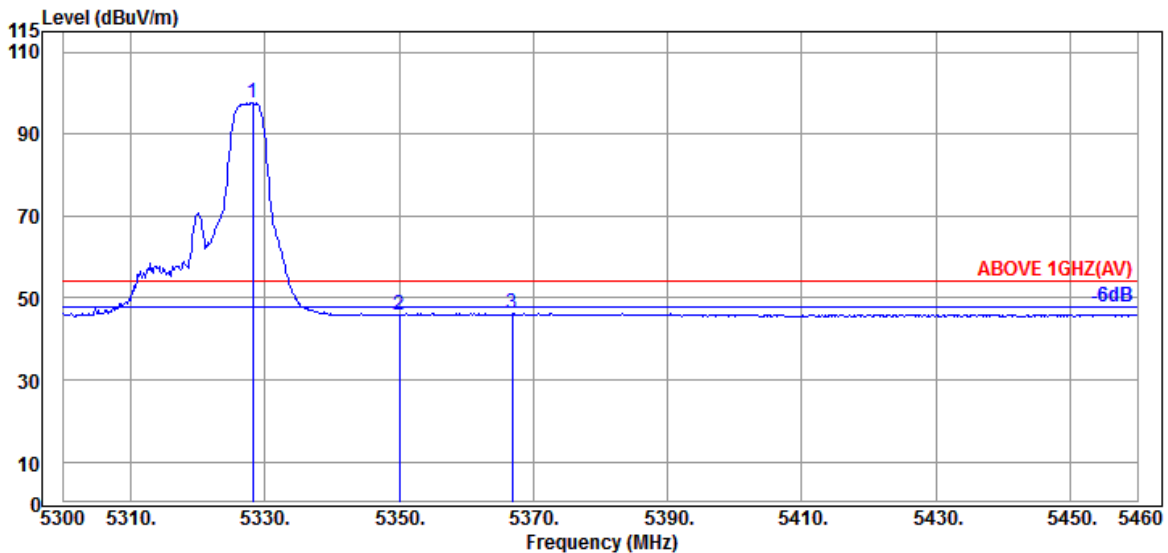


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	10.83	34.28	86.68	97.80	---	---	Average
5350.080	34.60	10.83	34.27	34.79	45.95	54.00	8.05	Average
5366.880	34.63	10.85	34.27	34.98	46.19	54.00	7.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

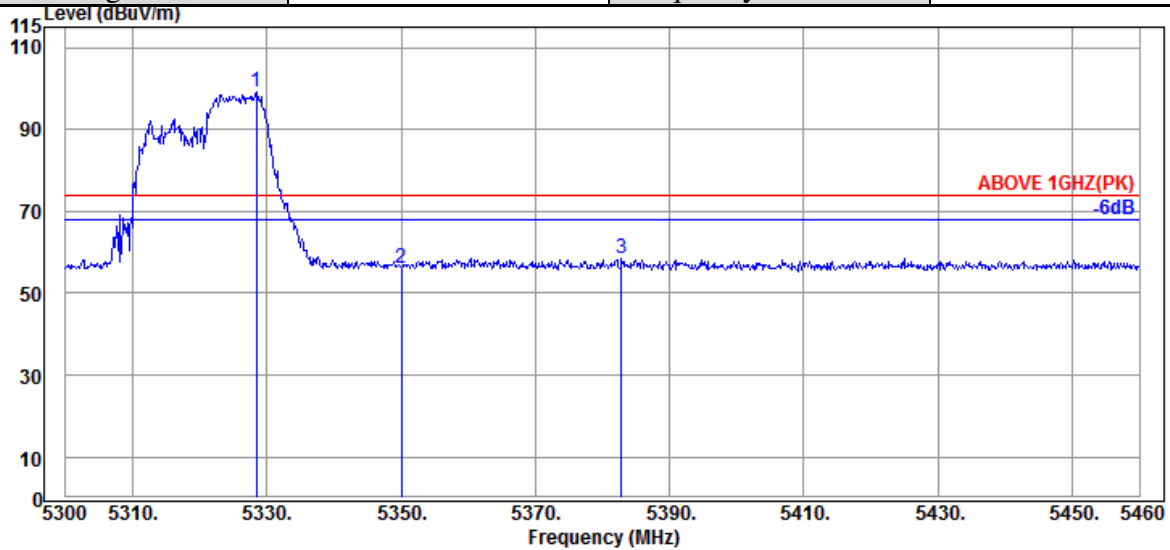

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	88.04	99.16	---	---	Peak
5350.080	34.60	10.83	34.27	45.12	56.28	74.00	17.72	Peak
5382.880	34.67	10.85	34.27	47.26	58.51	74.00	15.49	Peak

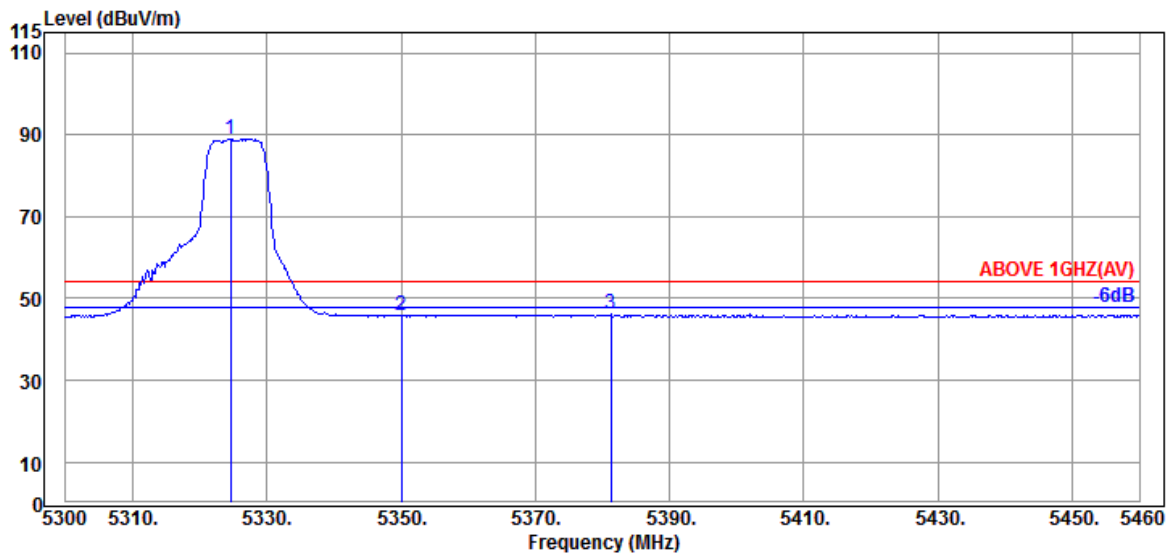


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.640	34.57	10.83	34.28	77.89	89.01	---	---	Average
5350.080	34.60	10.83	34.27	34.60	45.76	54.00	8.24	Average
5381.280	34.67	10.85	34.27	34.81	46.06	54.00	7.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

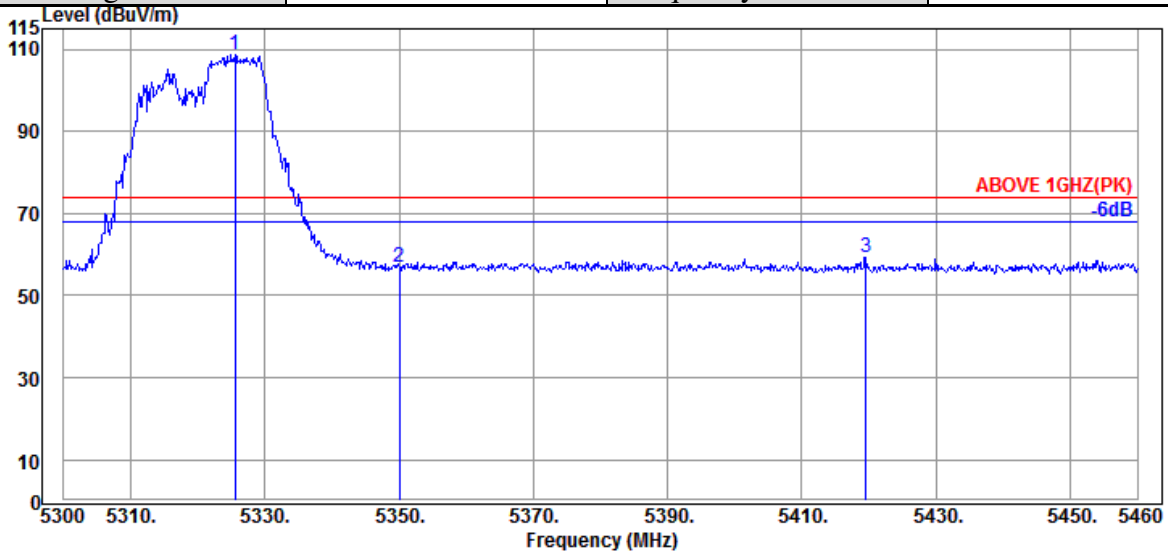

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.600	34.57	10.83	34.28	97.71	108.83	---	---	Peak
5350.080	34.60	10.83	34.27	45.63	56.79	74.00	17.21	Peak
5419.520	34.60	10.87	34.26	48.01	59.22	74.00	14.78	Peak

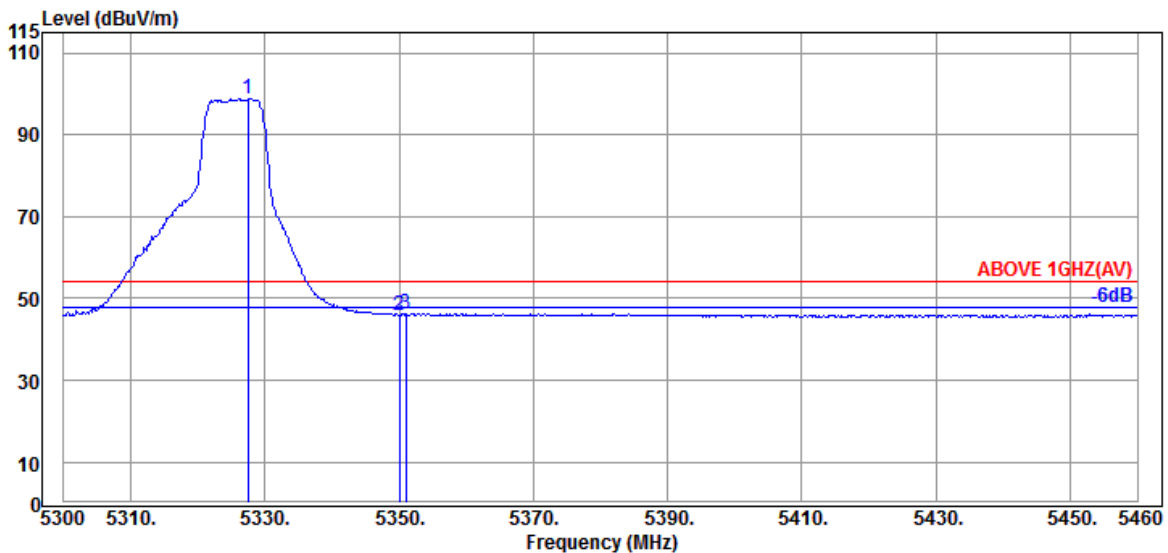


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	34.57	10.83	34.28	87.69	98.81	---	---	Average
5350.080	34.60	10.83	34.27	34.88	46.04	54.00	7.96	Average
5351.040	34.60	10.83	34.27	35.02	46.18	54.00	7.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

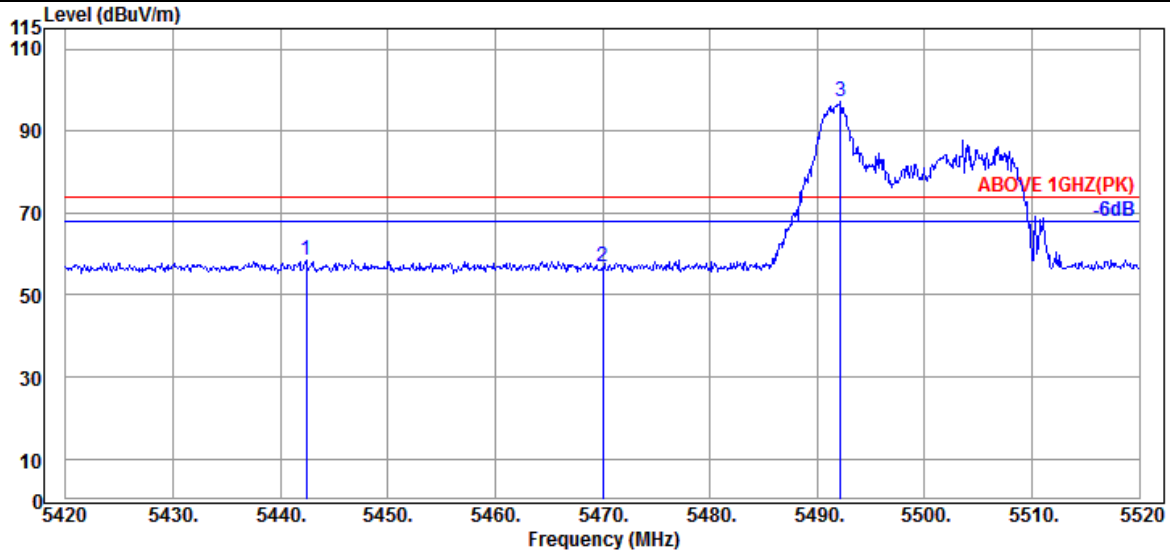

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.400	34.55	10.89	34.25	47.26	58.45	74.00	15.55	Peak
5470.000	34.47	10.91	34.24	45.79	56.93	74.00	17.07	Peak
@ 5492.200	34.43	10.91	34.23	85.98	97.09	---	---	Peak

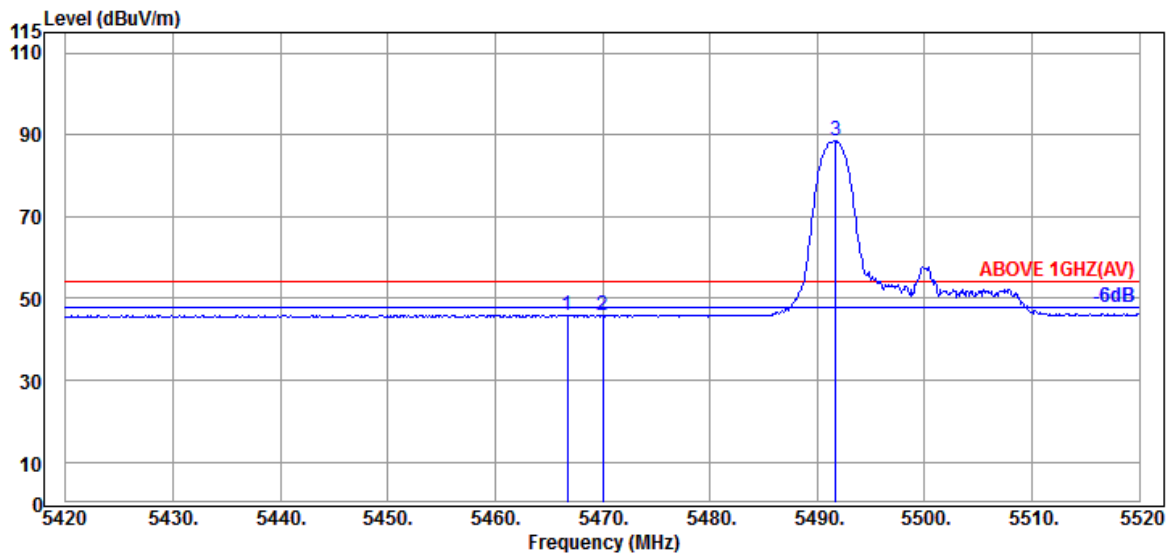


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.47	10.91	34.24	34.77	45.91	54.00	8.09	Average
5470.000	34.47	10.91	34.24	34.66	45.80	54.00	8.20	Average
@ 5491.700	34.43	10.91	34.23	77.39	88.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

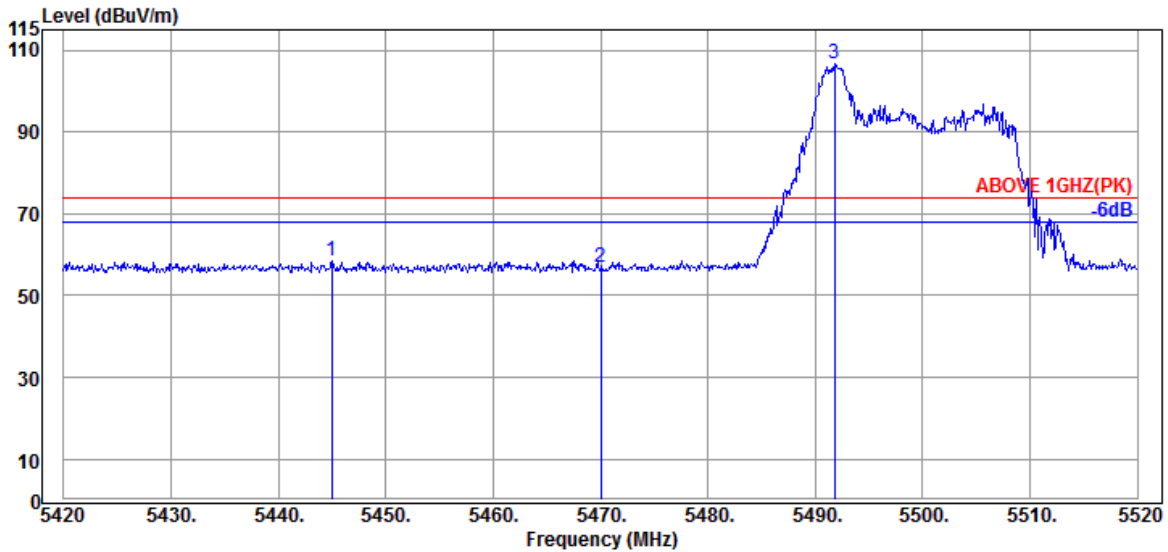

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.000	34.55	10.89	34.25	47.24	58.43	74.00	15.57	Peak
5470.000	34.47	10.91	34.24	45.59	56.73	74.00	17.27	Peak
@ 5491.800	34.43	10.91	34.23	95.52	106.63	---	---	Peak

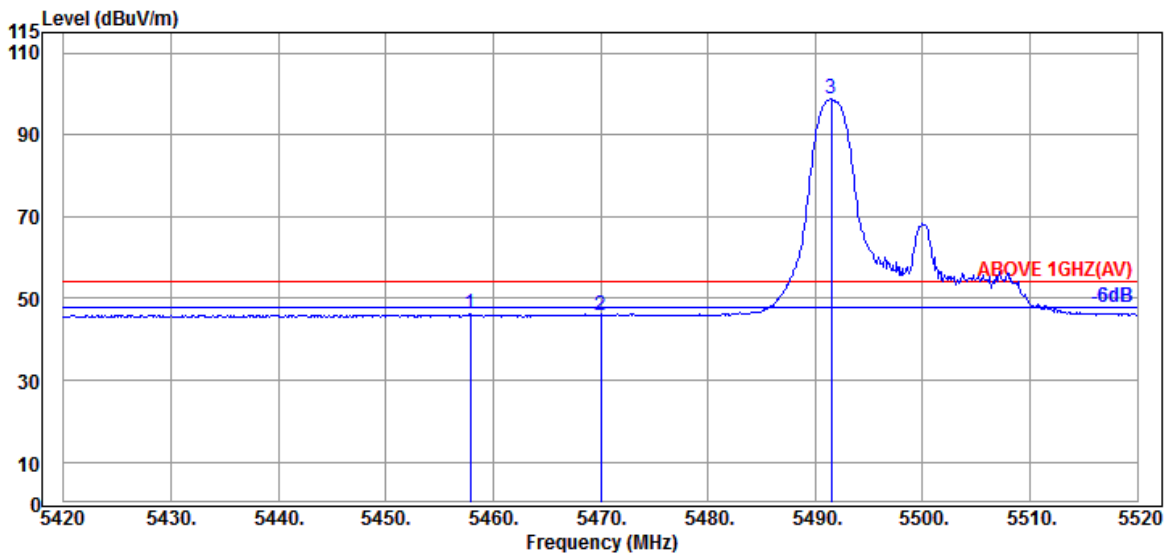


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.50	10.89	34.24	34.97	46.12	54.00	7.88	Average
5470.000	34.47	10.91	34.24	34.90	46.04	54.00	7.96	Average
@ 5491.500	34.43	10.91	34.23	87.56	98.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

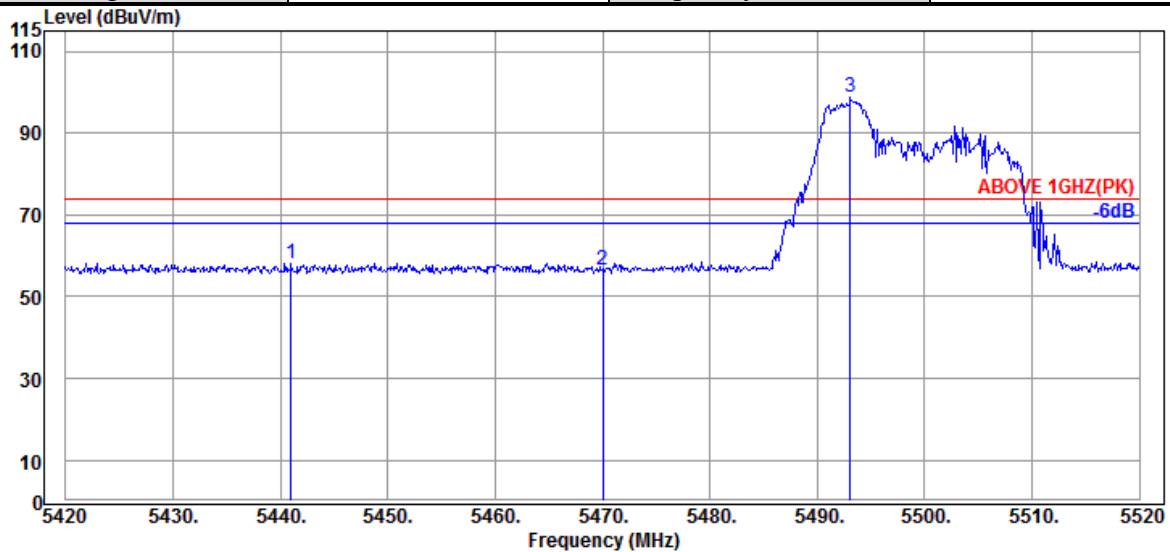

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.000	34.55	10.89	34.25	47.02	58.21	74.00	15.79	Peak
5470.000	34.47	10.91	34.24	45.53	56.67	74.00	17.33	Peak
@ 5493.100	34.43	10.91	34.23	87.57	98.68	---	---	Peak

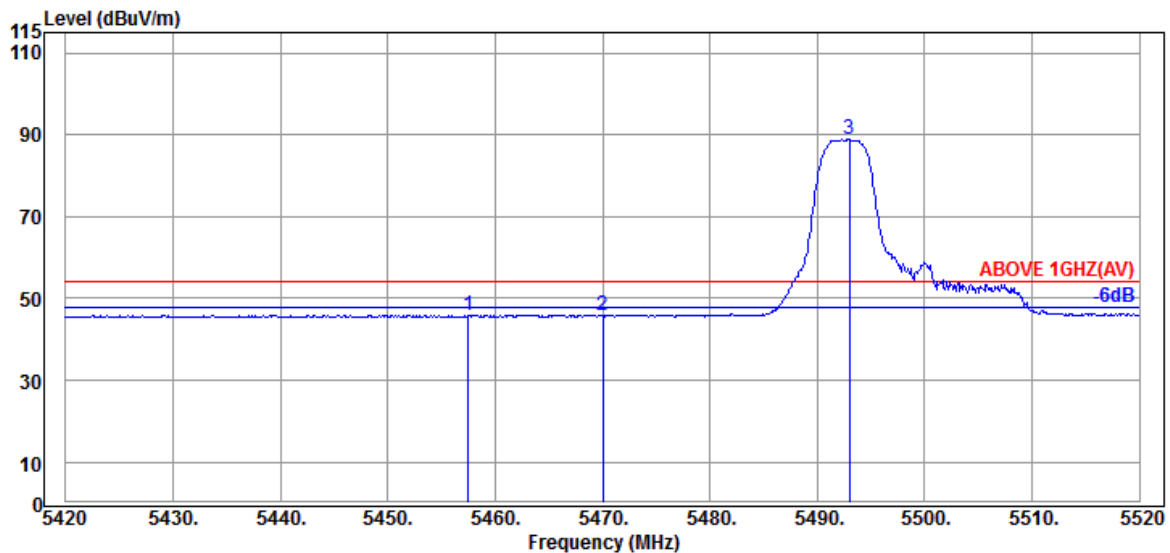


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.50	10.89	34.24	34.83	45.98	54.00	8.02	Average
5470.000	34.47	10.91	34.24	34.56	45.70	54.00	8.30	Average
@ 5493.000	34.43	10.91	34.23	77.80	88.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

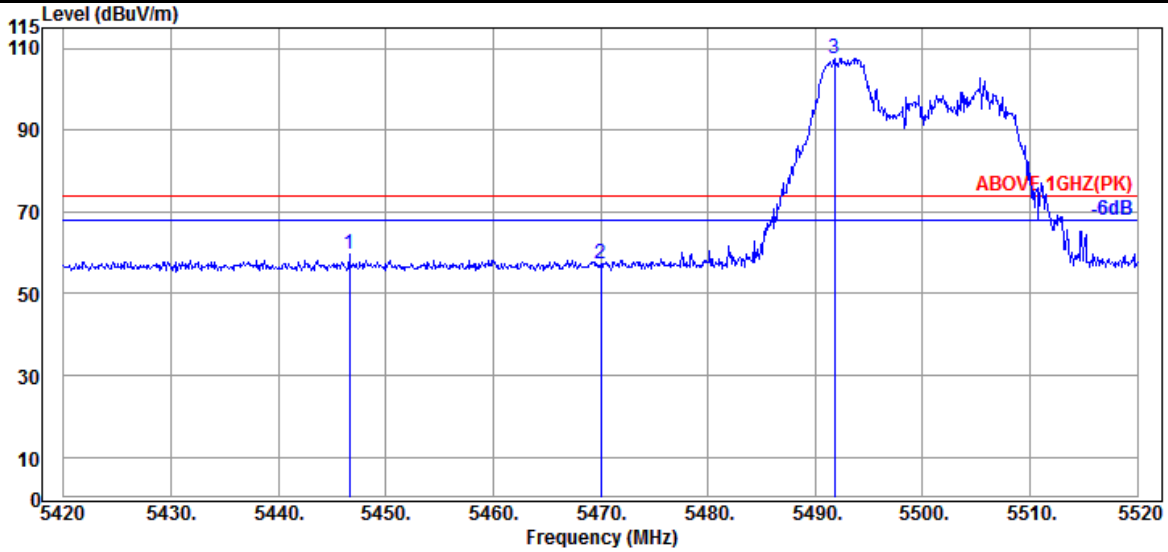

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.600	34.55	10.89	34.25	48.48	59.67	74.00	14.33	Peak
5470.000	34.47	10.91	34.24	46.25	57.39	74.00	16.61	Peak
@ 5491.800	34.43	10.91	34.23	96.47	107.58	---	---	Peak

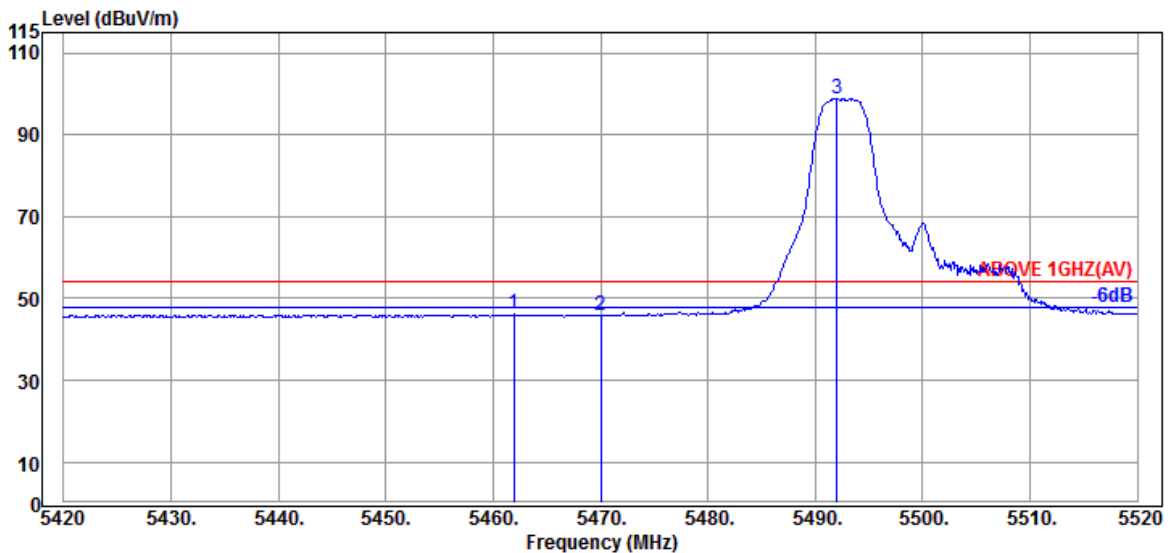


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.900	34.50	10.91	34.24	34.90	46.07	54.00	7.93	Average
5470.000	34.47	10.91	34.24	34.68	45.82	54.00	8.18	Average
@ 5492.000	34.43	10.91	34.23	87.76	98.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

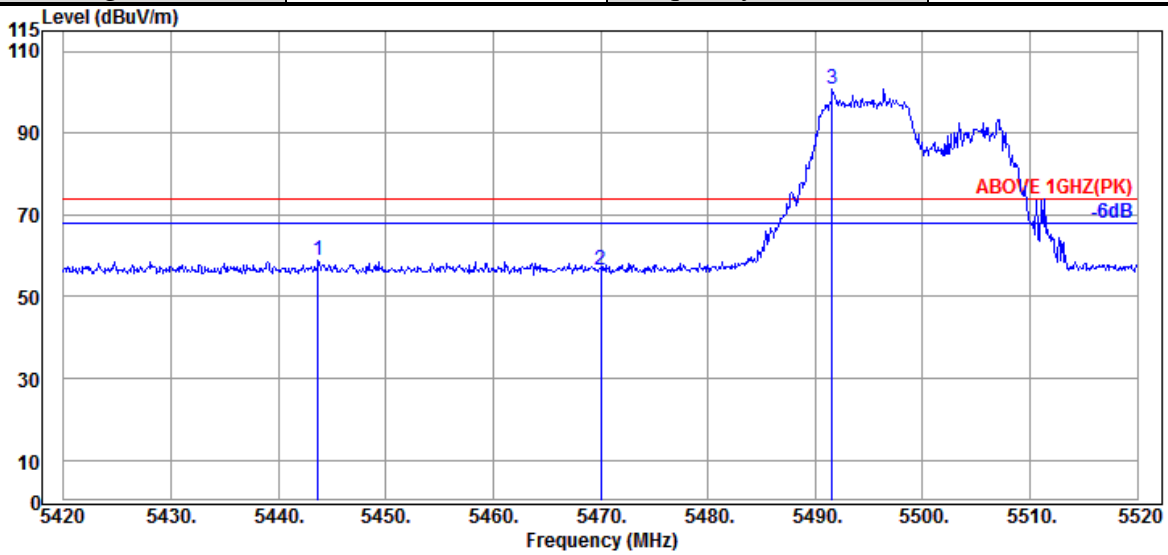

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.700	34.55	10.89	34.25	47.62	58.81	74.00	15.19	Peak
5470.000	34.47	10.91	34.24	45.55	56.69	74.00	17.31	Peak
@ 5491.600	34.43	10.91	34.23	89.58	100.69	---	---	Peak

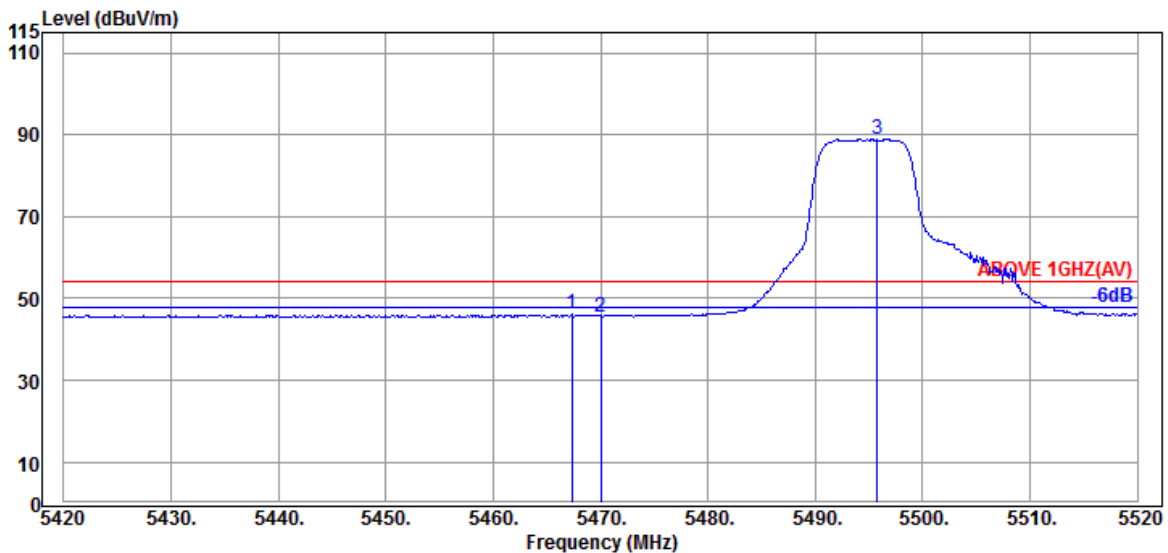


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.47	10.91	34.24	34.92	46.06	54.00	7.94	Average
5470.000	34.47	10.91	34.24	34.45	45.59	54.00	8.41	Average
@ 5495.800	34.40	10.93	34.23	77.83	88.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

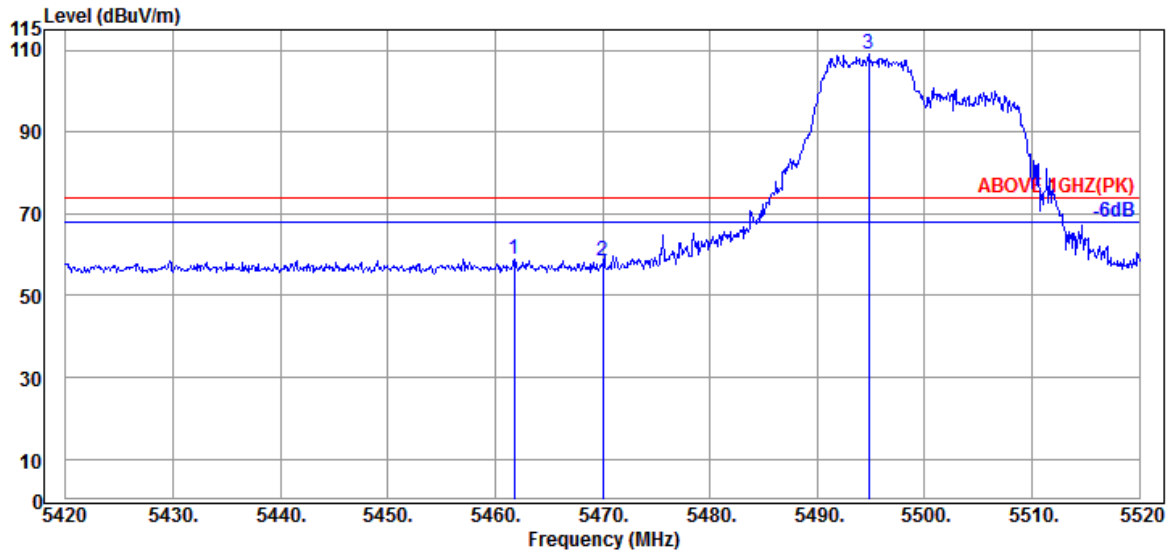

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.50	10.91	34.24	47.74	58.91	74.00	15.09	Peak
5470.000	34.47	10.91	34.24	47.51	58.65	74.00	15.35	Peak
@ 5494.800	34.43	10.93	34.23	98.08	109.21	---	---	Peak

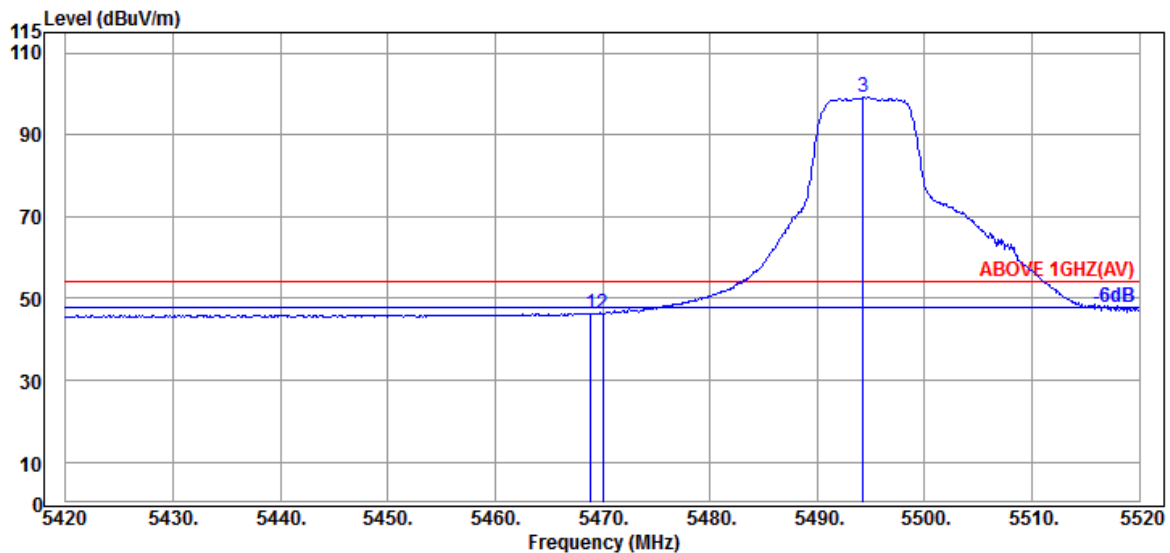


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	35.24	46.38	54.00	7.62	Average
5470.000	34.47	10.91	34.24	35.14	46.28	54.00	7.72	Average
@ 5494.300	34.43	10.91	34.23	87.98	99.09	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

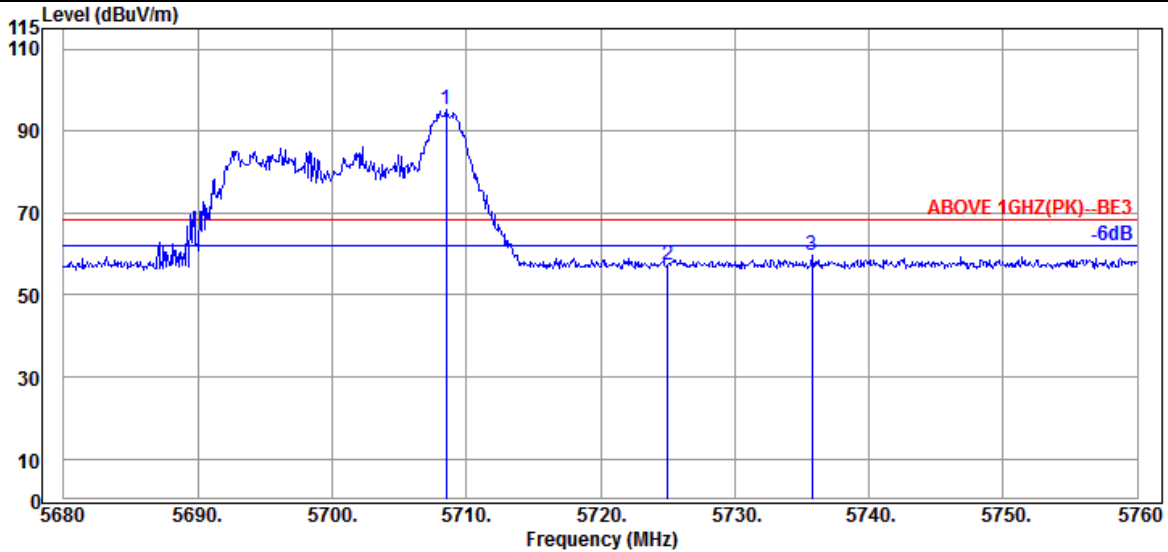

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.480	34.53	11.03	34.32	83.85	95.09	---	---	Peak
5725.040	34.67	11.05	34.32	45.94	57.34	68.20	10.86	Peak
5735.760	34.67	11.05	34.33	48.10	59.49	68.20	8.71	Peak

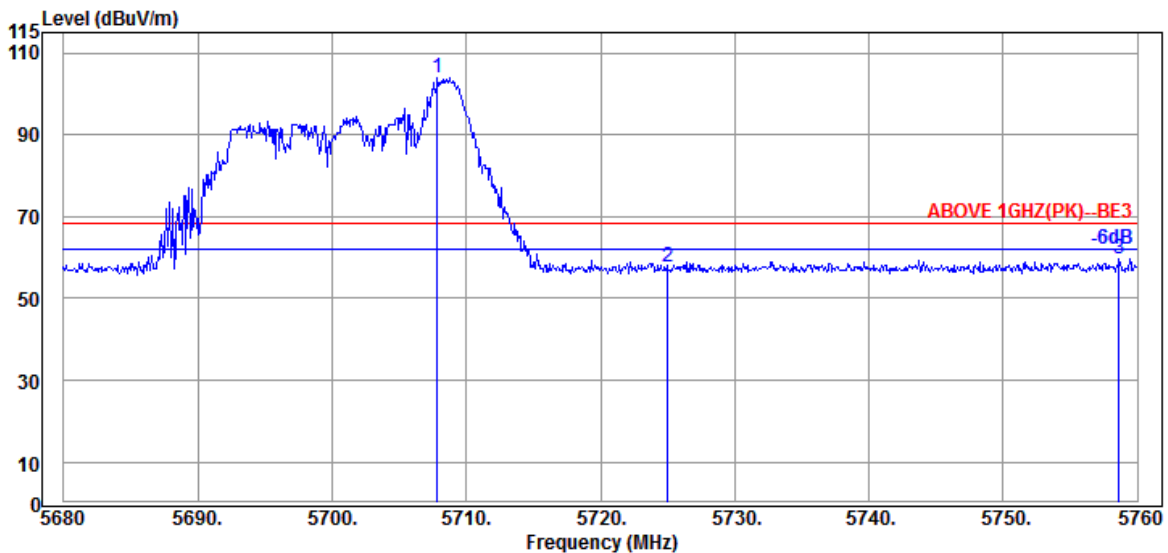


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.840	34.53	11.03	34.32	92.54	103.78	---	---	Peak
5725.040	34.67	11.05	34.32	46.15	57.55	68.20	10.65	Peak
5758.640	34.87	11.06	34.35	48.15	59.73	68.20	8.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

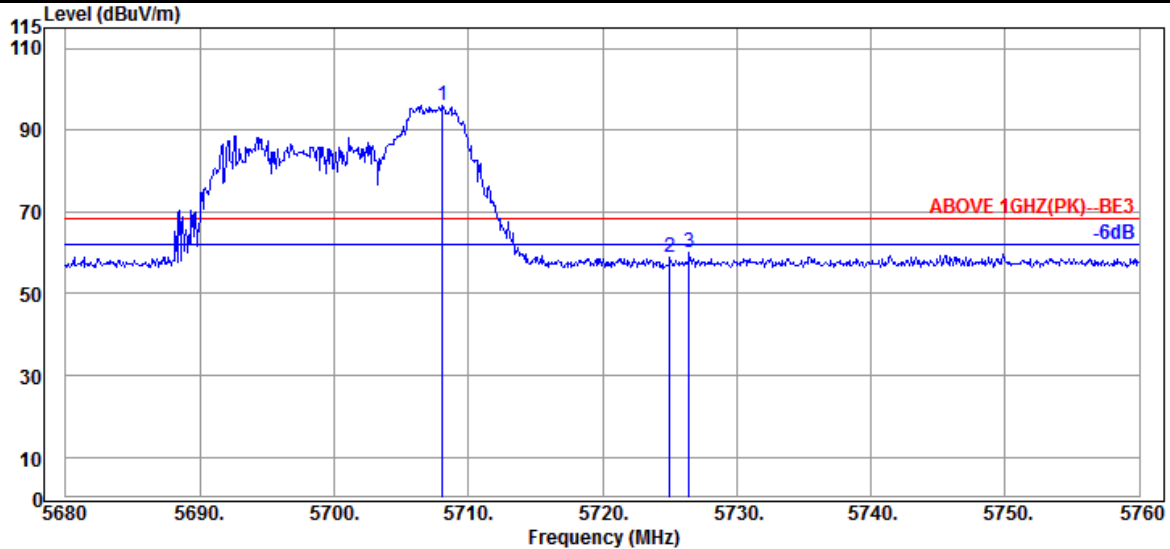

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.080	34.53	11.03	34.32	84.89	96.13	---	---	Peak
5725.040	34.67	11.05	34.32	47.35	58.75	68.20	9.45	Peak
5726.480	34.67	11.05	34.32	48.48	59.88	68.20	8.32	Peak

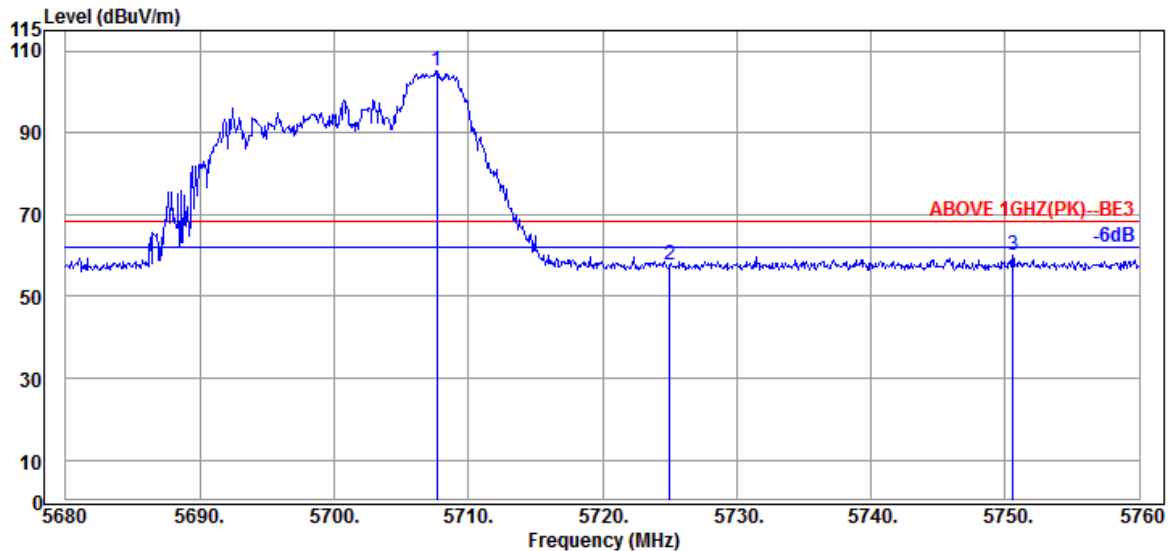


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.680	34.53	11.03	34.32	93.92	105.16	---	---	Peak
5725.040	34.67	11.05	34.32	46.18	57.58	68.20	10.62	Peak
5750.560	34.80	11.06	34.33	48.34	59.87	68.20	8.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

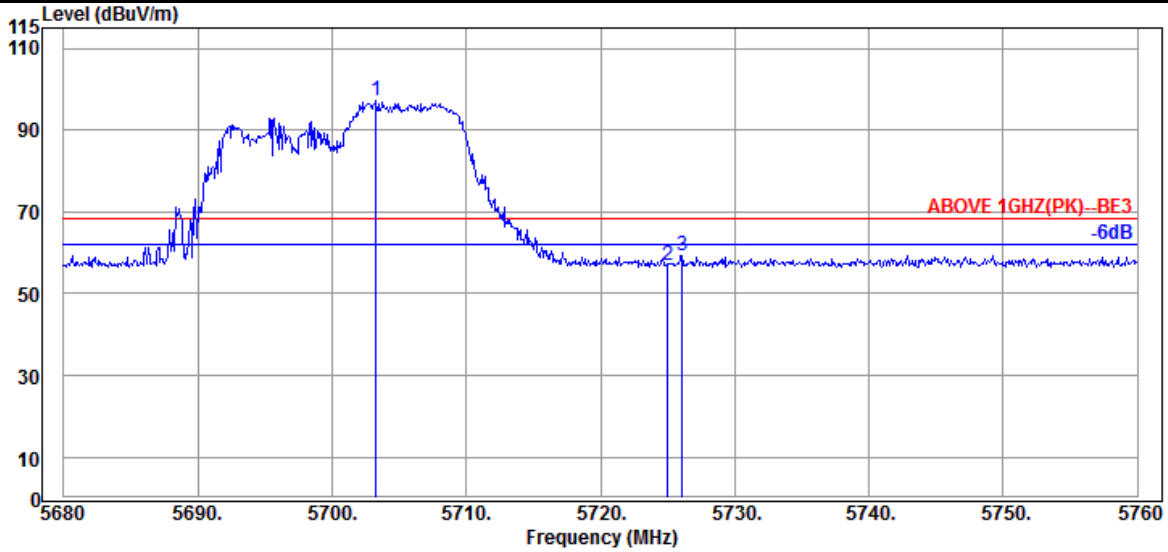

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.280	34.40	11.03	34.31	86.12	97.24	---	---	Peak
5725.040	34.67	11.05	34.32	45.34	56.74	68.20	11.46	Peak
5726.080	34.67	11.05	34.32	47.88	59.28	68.20	8.92	Peak

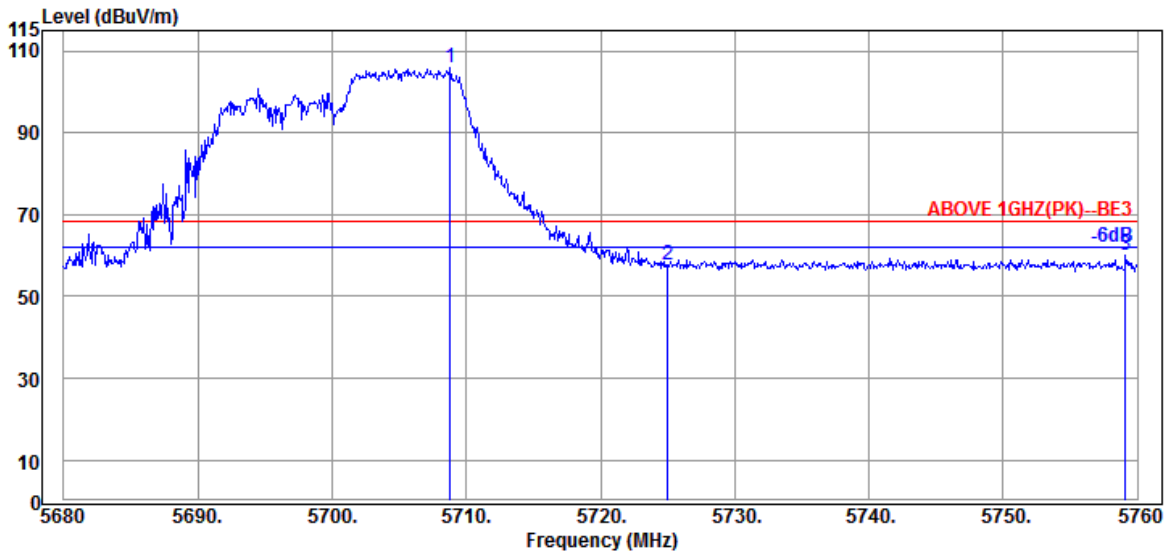


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.800	34.53	11.03	34.32	94.53	105.77	---	---	Peak
5725.040	34.67	11.05	34.32	46.24	57.64	68.20	10.56	Peak
5759.120	34.87	11.06	34.35	48.56	60.14	68.20	8.06	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

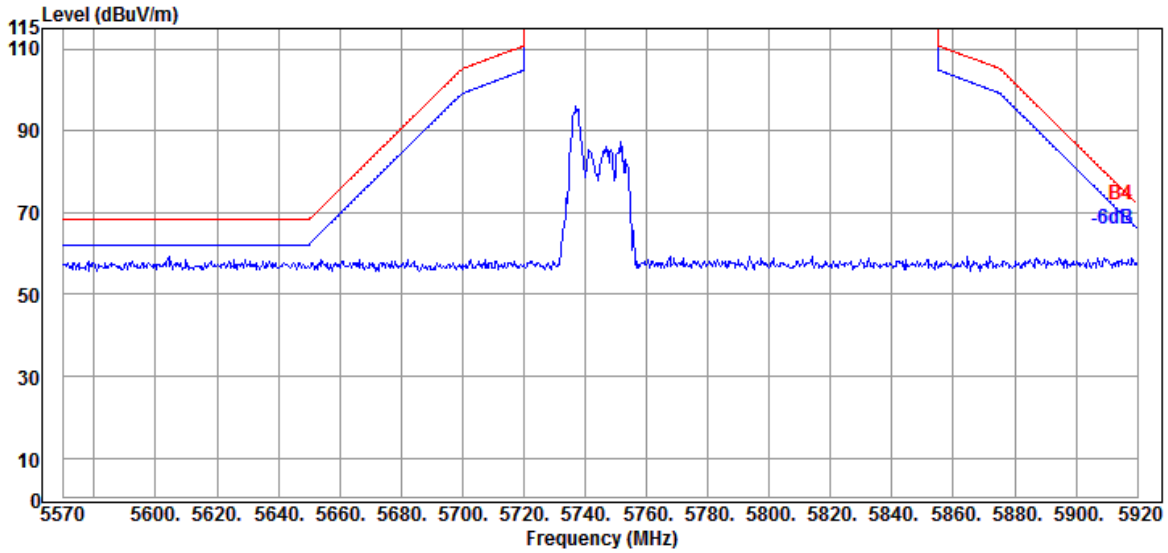


Antenna at Vertical Polarization

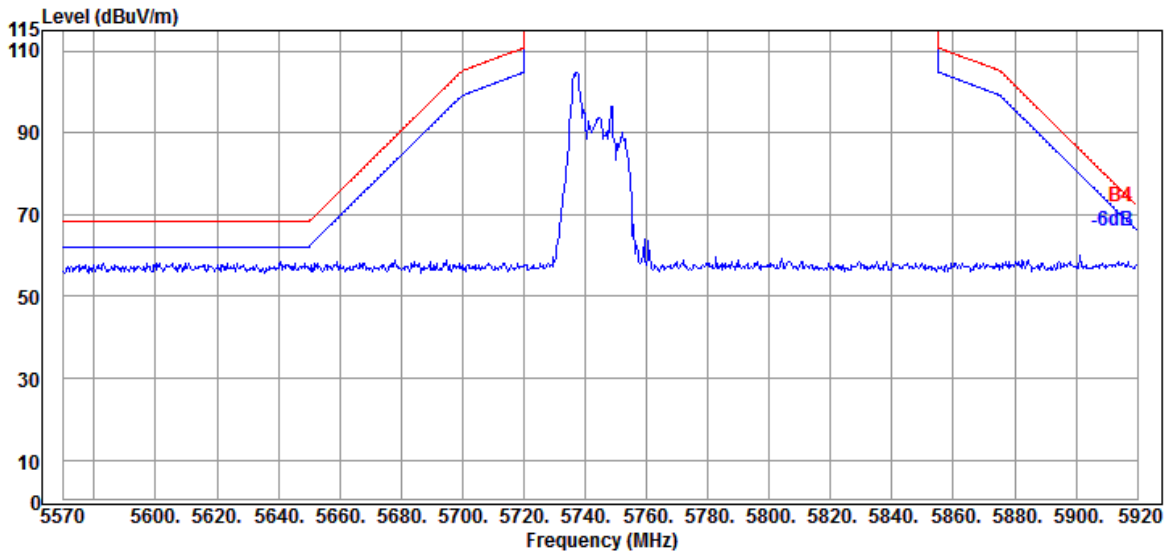


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

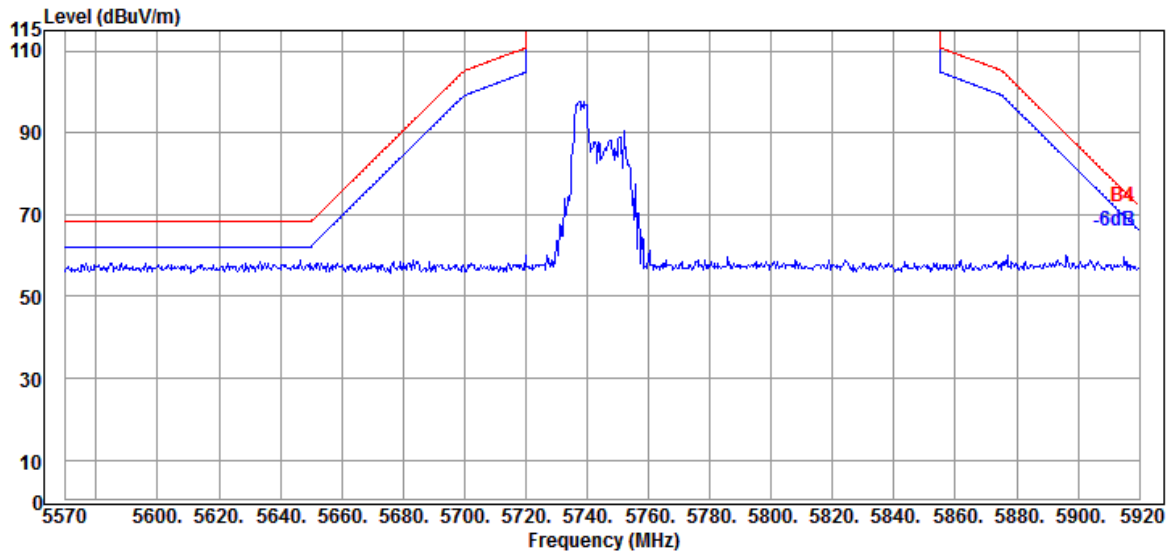


Antenna at Vertical Polarization

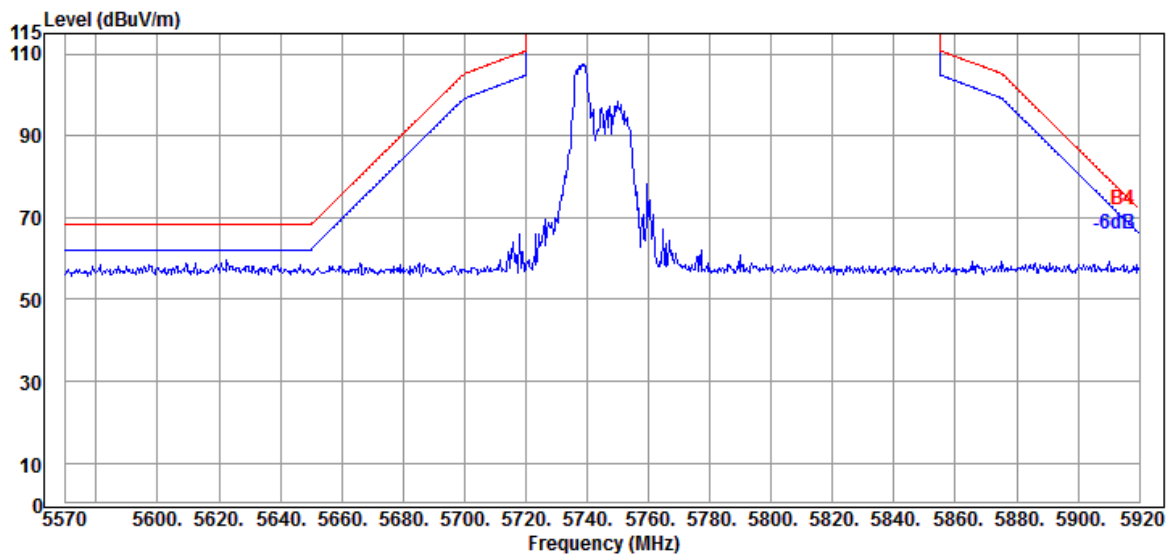


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

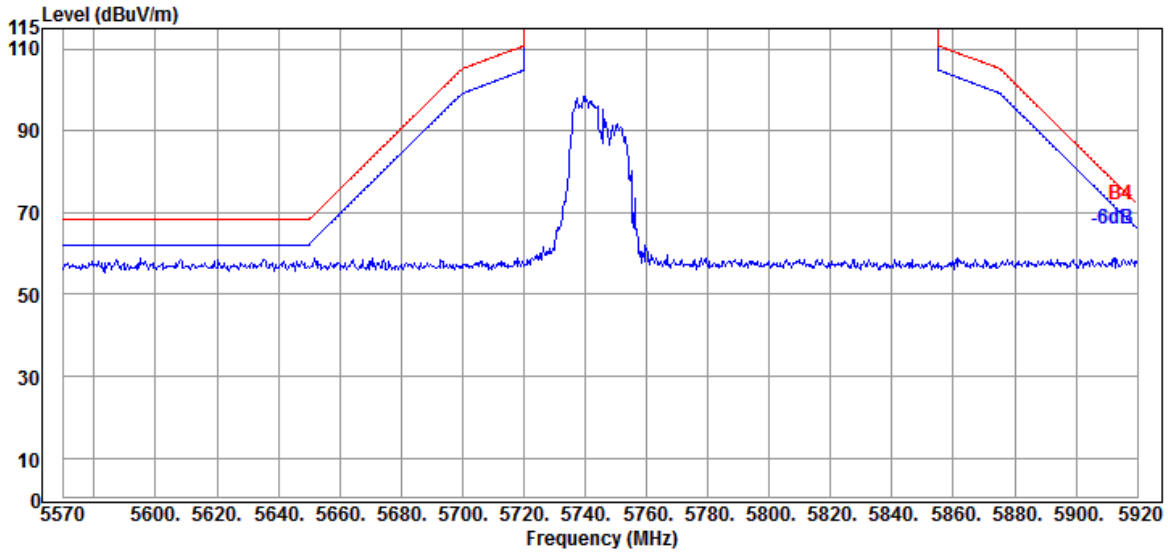


Antenna at Vertical Polarization

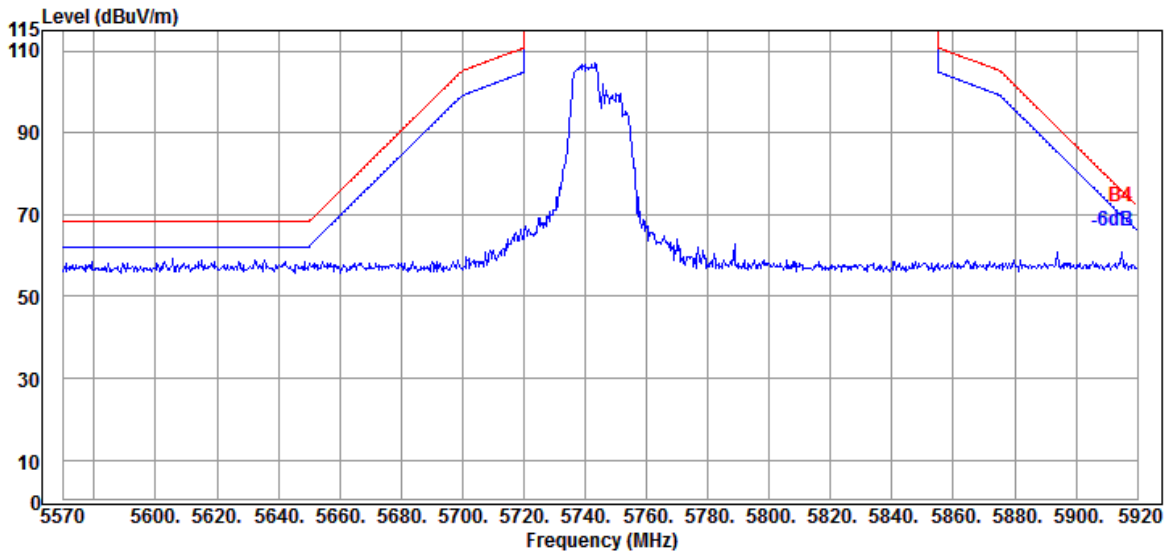


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

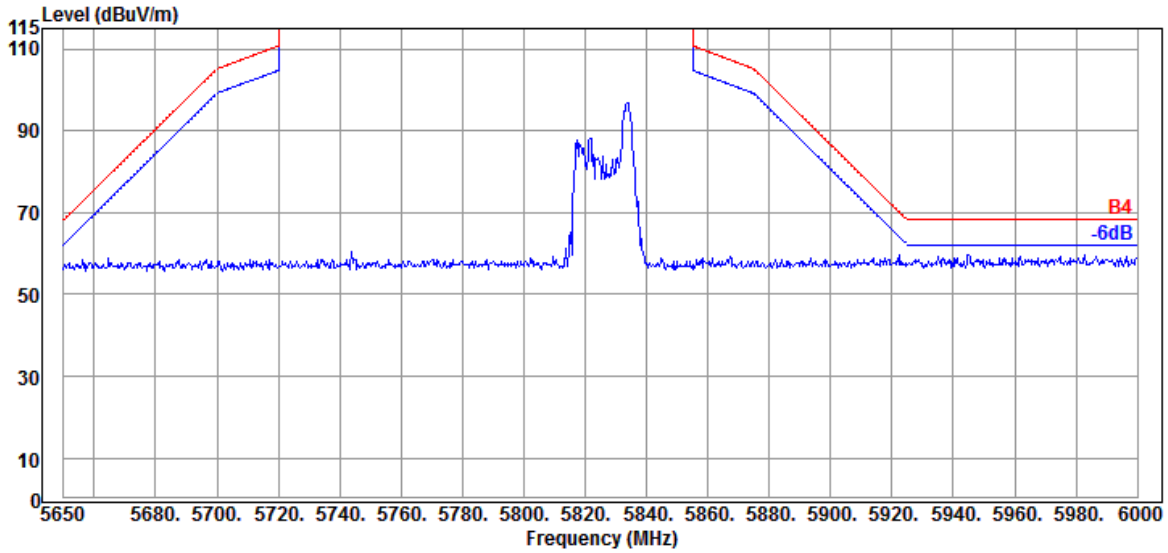


Antenna at Vertical Polarization

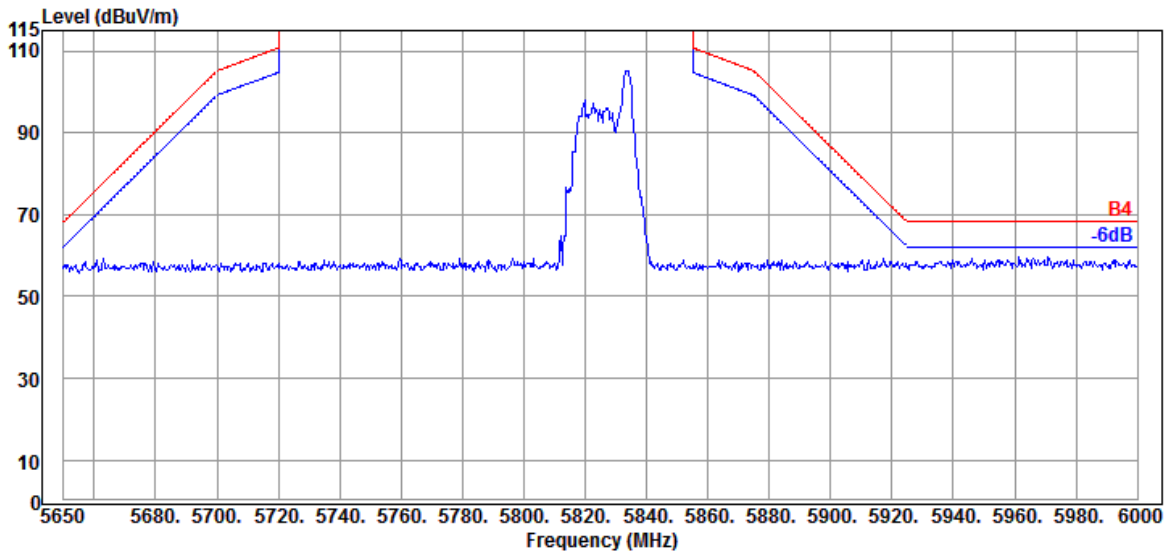


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

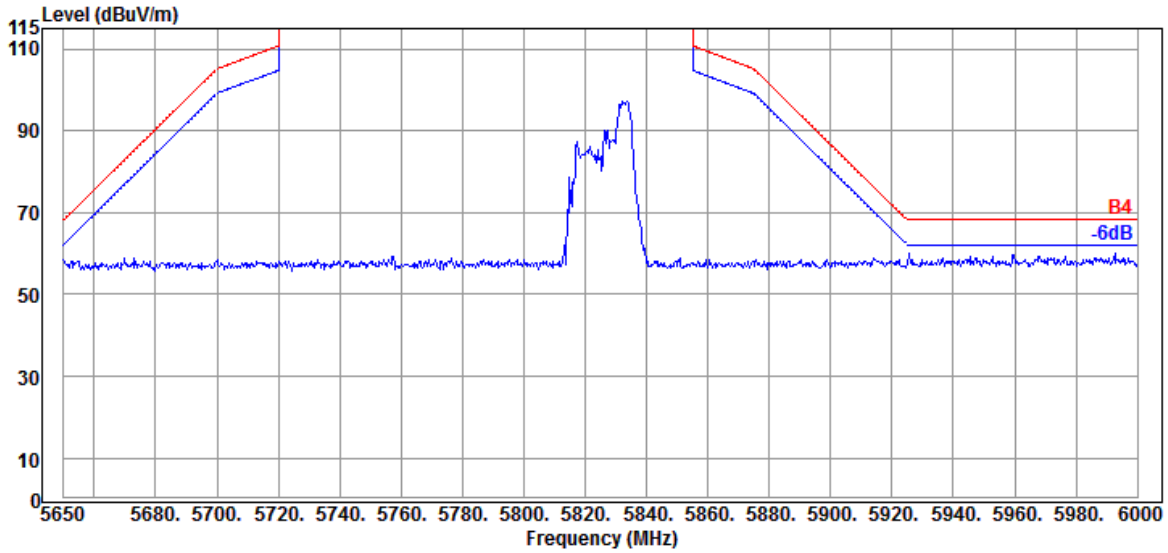


Antenna at Vertical Polarization

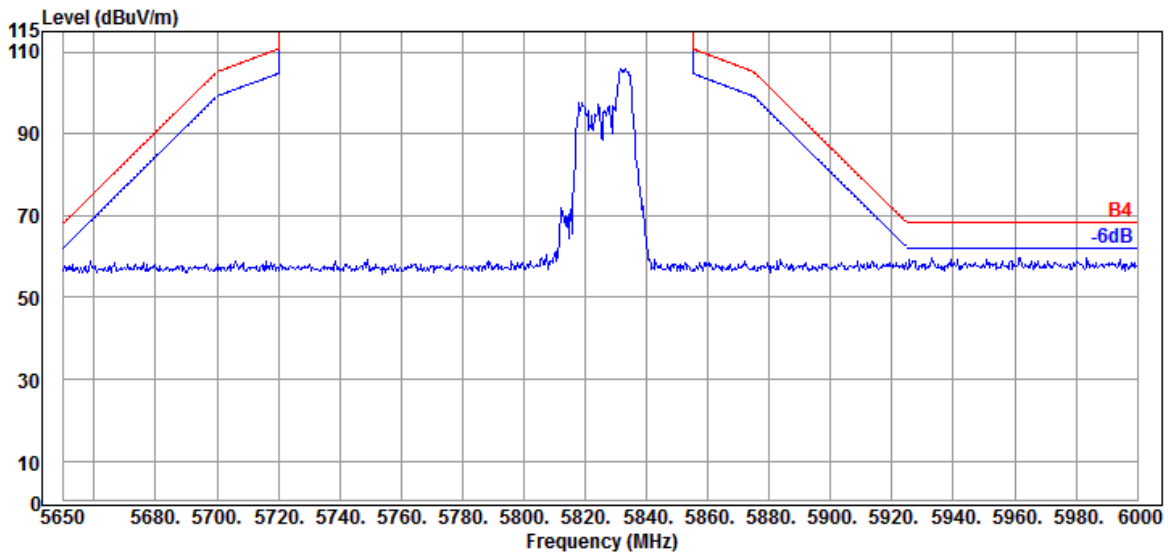


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

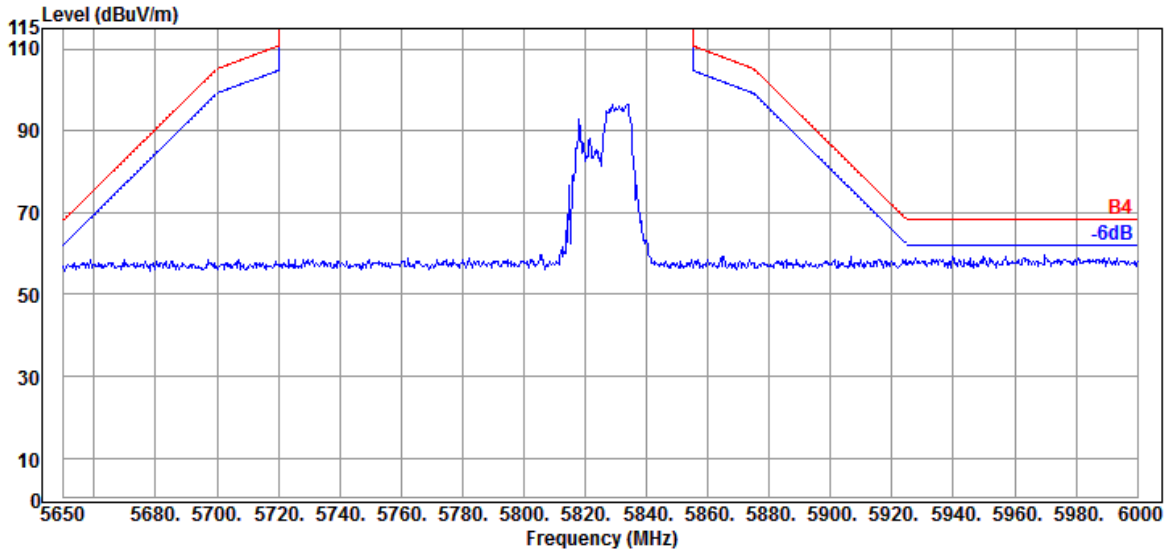

Antenna at Vertical Polarization

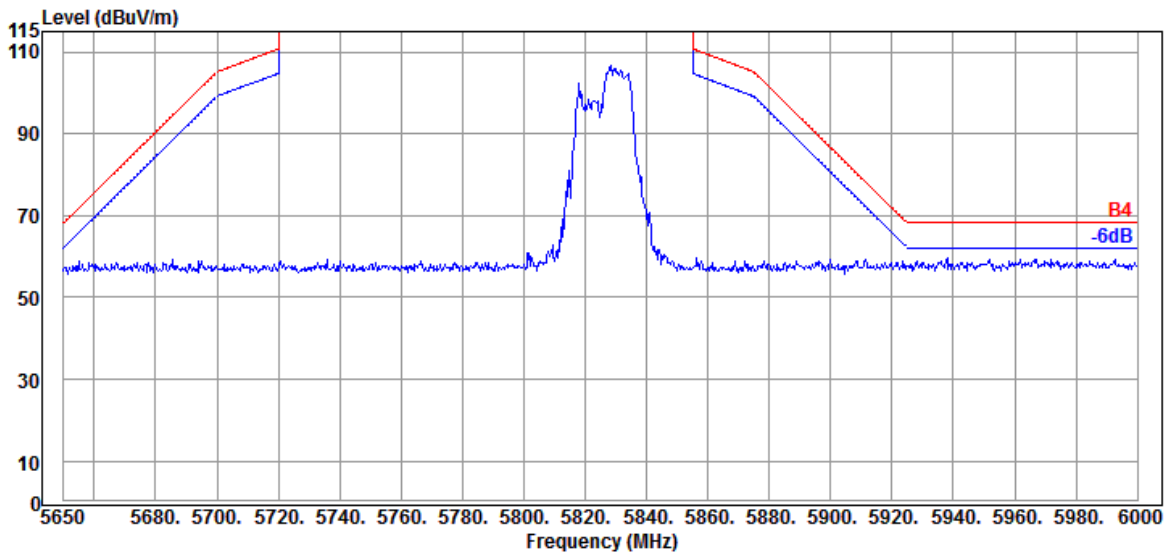


Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

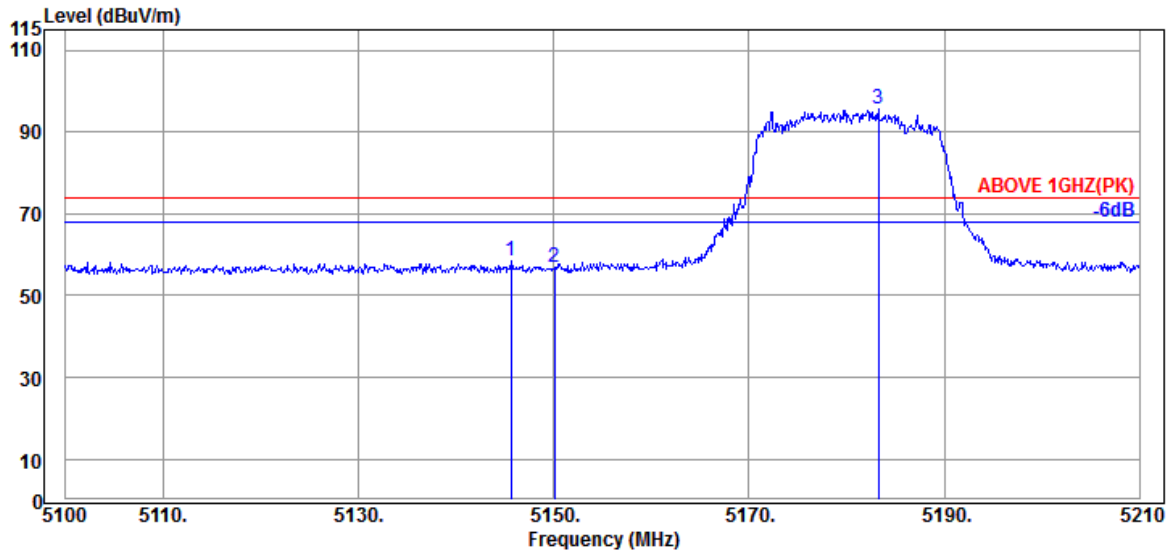

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.650	34.20	10.70	34.35	47.80	58.35	74.00	15.65	Peak
5150.050	34.20	10.70	34.35	46.38	56.93	74.00	17.07	Peak
@ 5183.270	34.20	10.72	34.34	84.90	95.48	---	---	Peak

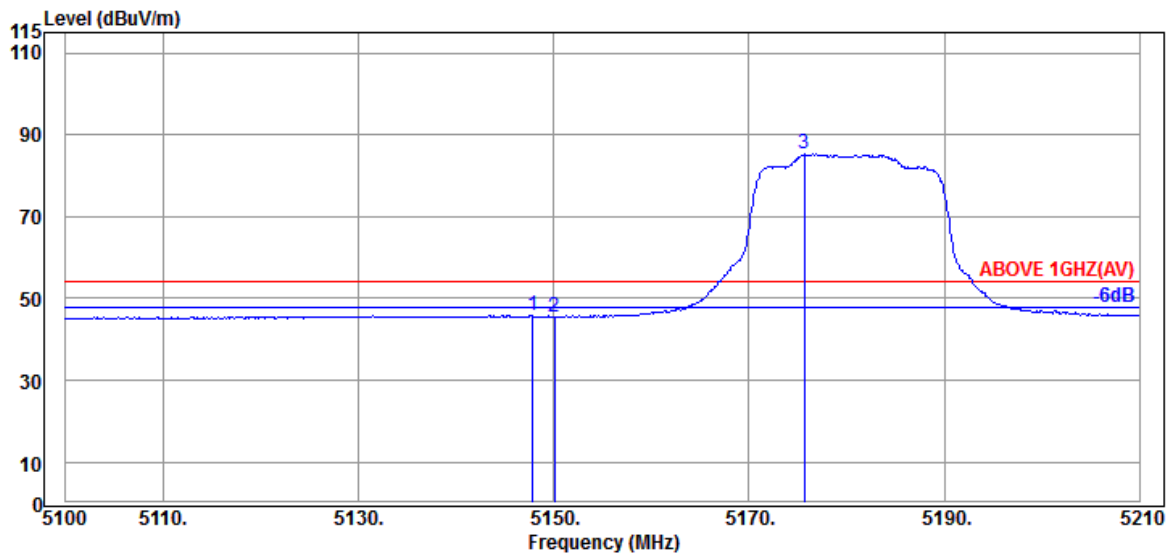


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.20	10.70	34.35	35.27	45.82	54.00	8.18	Average
5150.050	34.20	10.70	34.35	35.06	45.61	54.00	8.39	Average
@ 5175.680	34.20	10.72	34.34	74.69	85.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

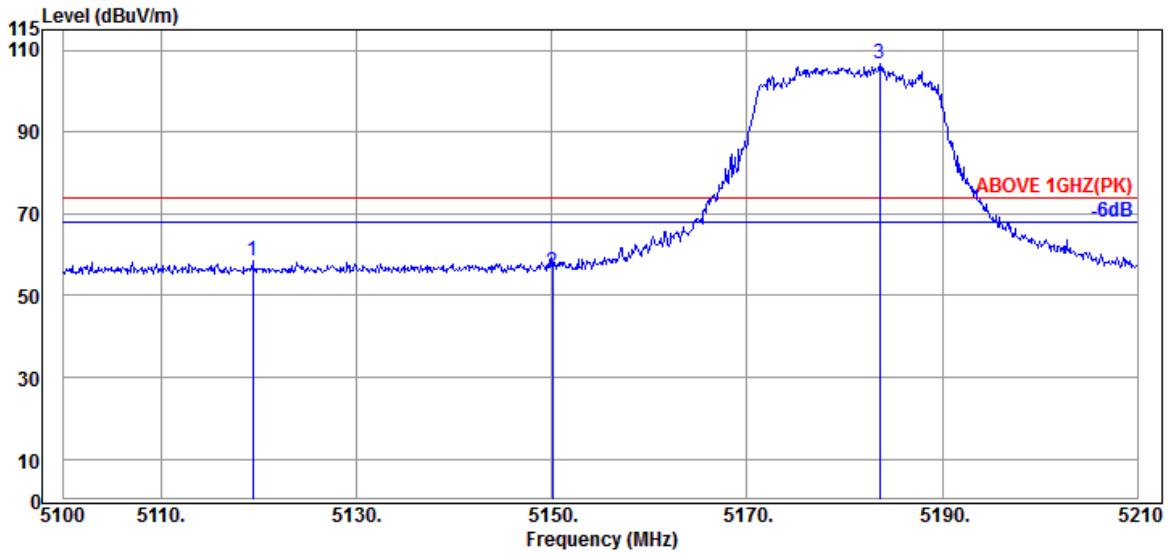

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.360	34.13	10.68	34.36	48.01	58.46	74.00	15.54	Peak
5150.050	34.20	10.70	34.35	45.37	55.92	74.00	18.08	Peak
@ 5183.600	34.20	10.72	34.34	96.11	106.69	---	---	Peak

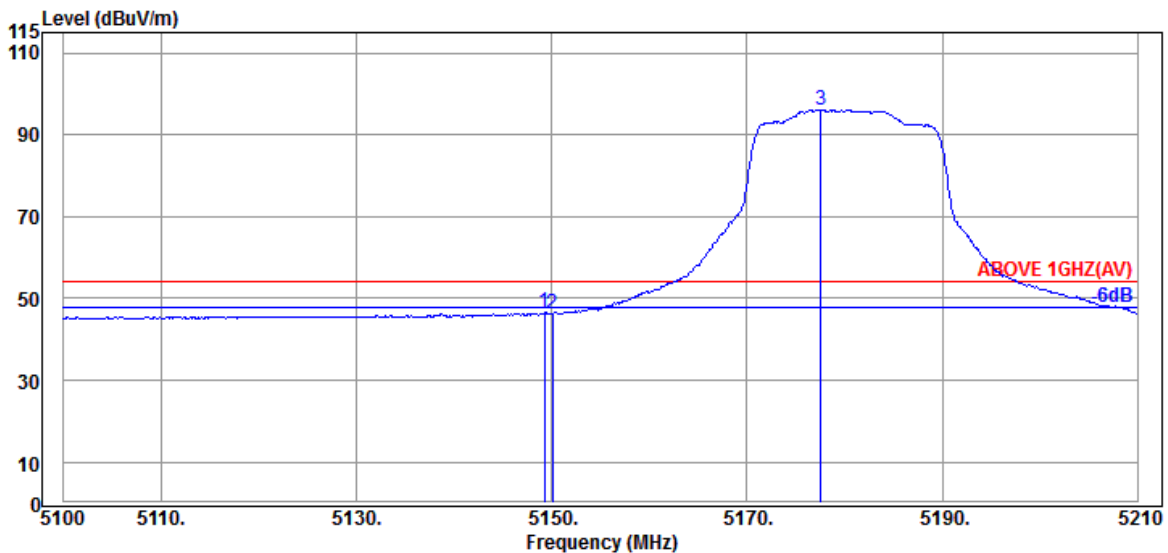


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	10.70	34.35	35.92	46.47	54.00	7.53	Average
5150.050	34.20	10.70	34.35	35.75	46.30	54.00	7.70	Average
@ 5177.550	34.20	10.72	34.34	85.58	96.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

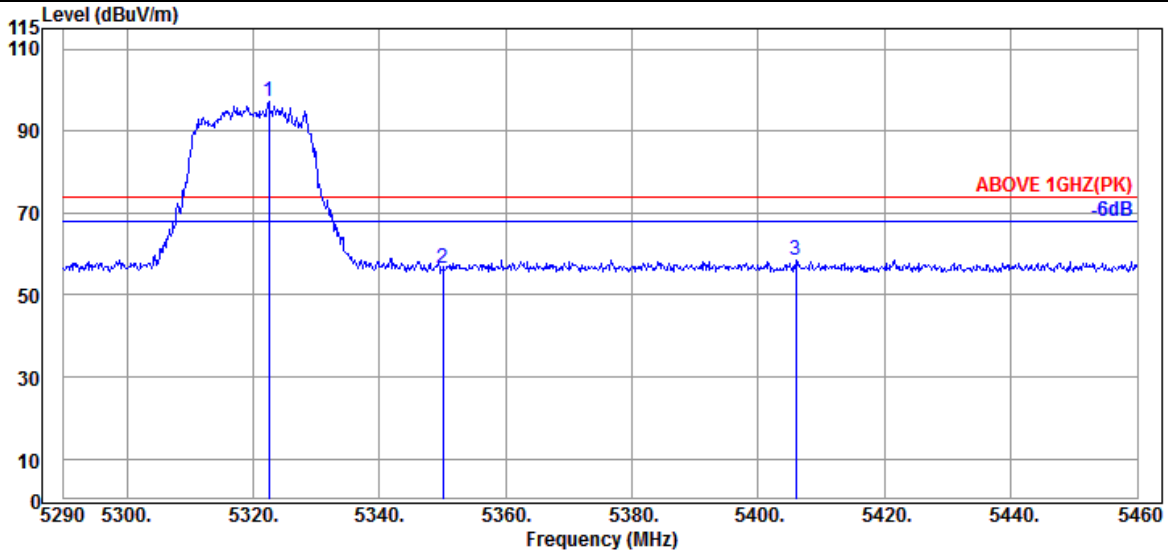

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.470	34.53	10.83	34.28	86.18	97.26	---	---	Peak
5350.010	34.60	10.83	34.27	45.26	56.42	74.00	17.58	Peak
5405.940	34.65	10.87	34.26	47.09	58.35	74.00	15.65	Peak

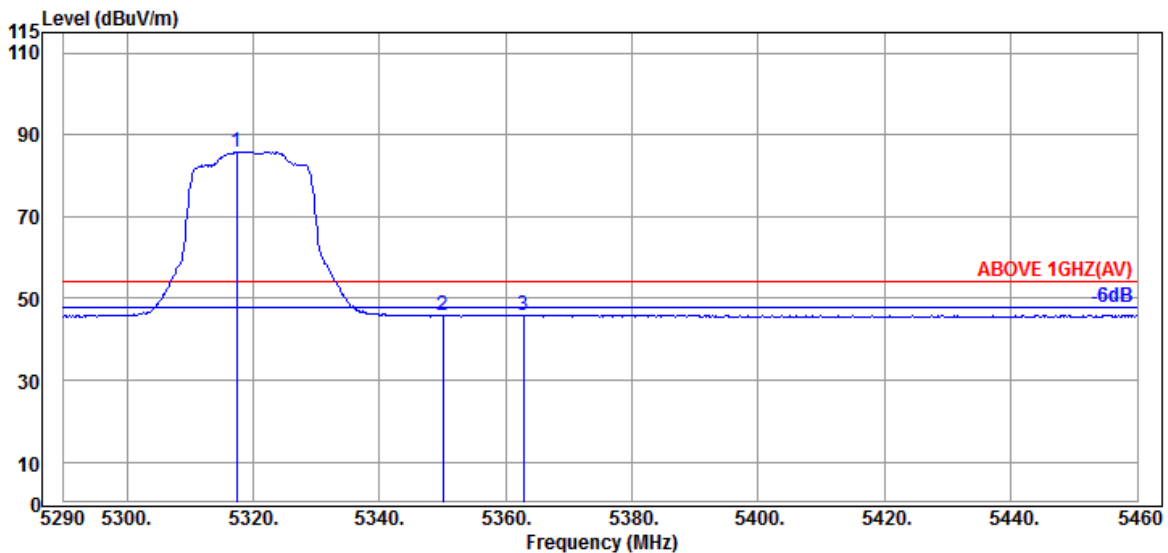


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.370	34.53	10.81	34.29	74.79	85.84	---	---	Average
5350.010	34.60	10.83	34.27	34.57	45.73	54.00	8.27	Average
5362.760	34.63	10.85	34.27	34.82	46.03	54.00	7.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

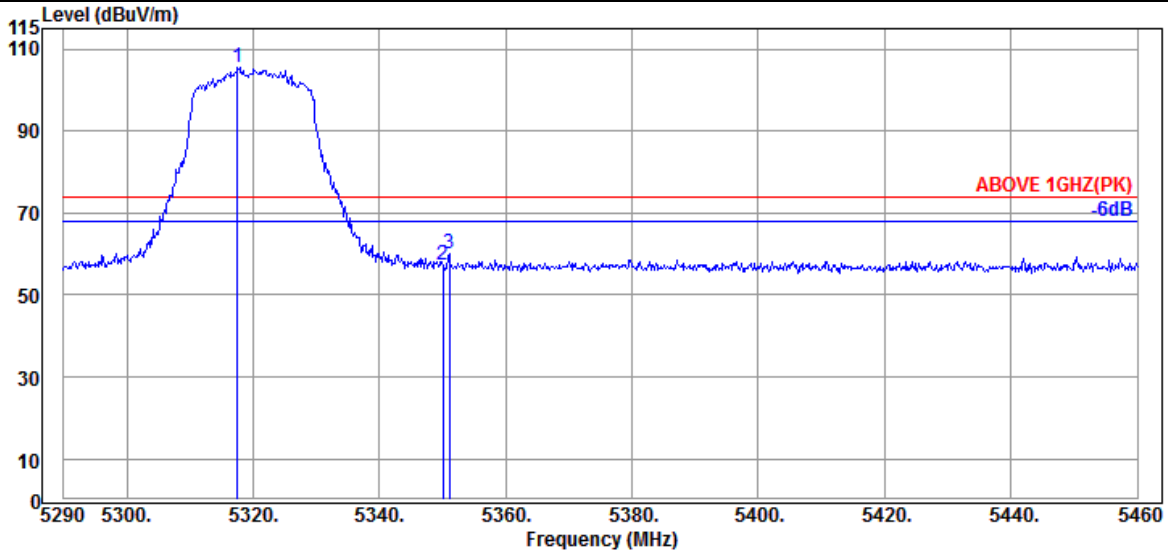

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.540	34.53	10.81	34.29	94.36	105.41	---	---	Peak
5350.010	34.60	10.83	34.27	46.22	57.38	74.00	16.62	Peak
5351.030	34.60	10.83	34.27	48.91	60.07	74.00	13.93	Peak

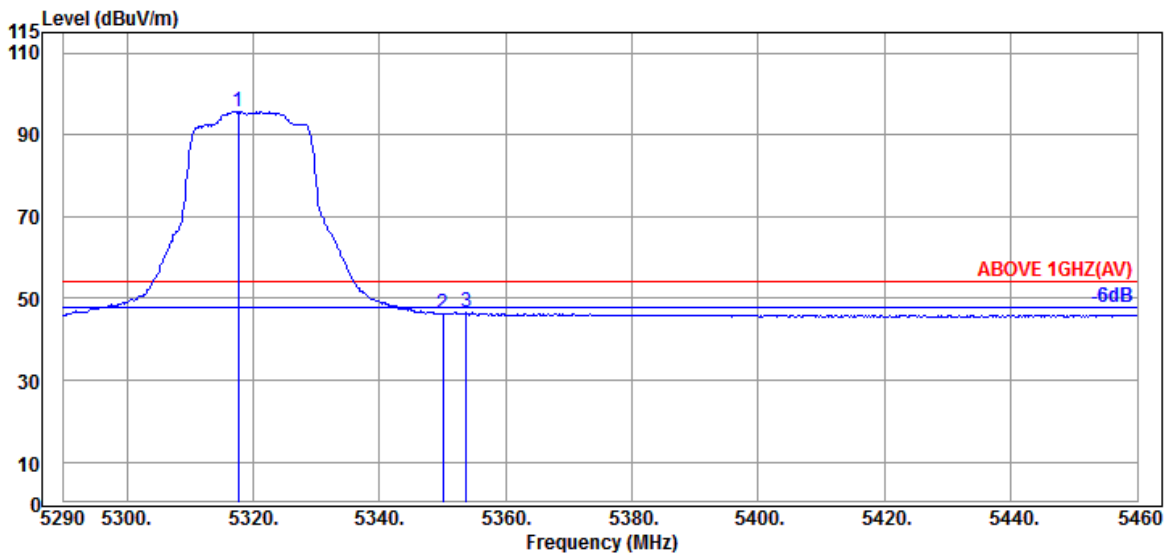


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.710	34.53	10.81	34.29	84.73	95.78	---	---	Average
5350.010	34.60	10.83	34.27	35.02	46.18	54.00	7.82	Average
5353.750	34.60	10.83	34.27	35.38	46.54	54.00	7.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

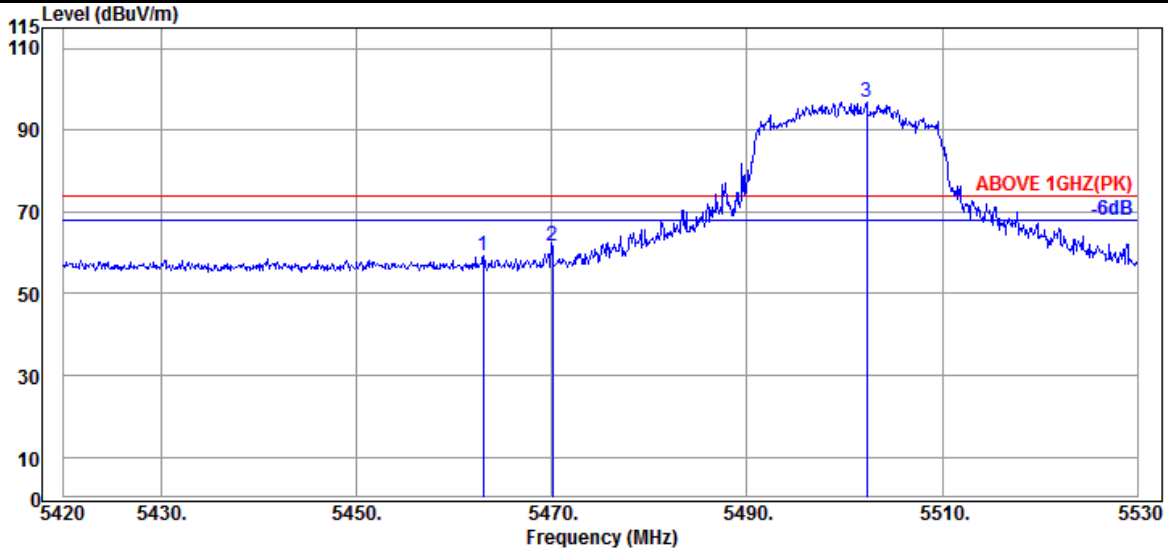

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.010	34.50	10.91	34.24	47.94	59.11	74.00	14.89	Peak
5470.050	34.47	10.91	34.24	50.70	61.84	74.00	12.16	Peak
@ 5502.280	34.40	10.93	34.24	85.60	96.69	---	---	Peak

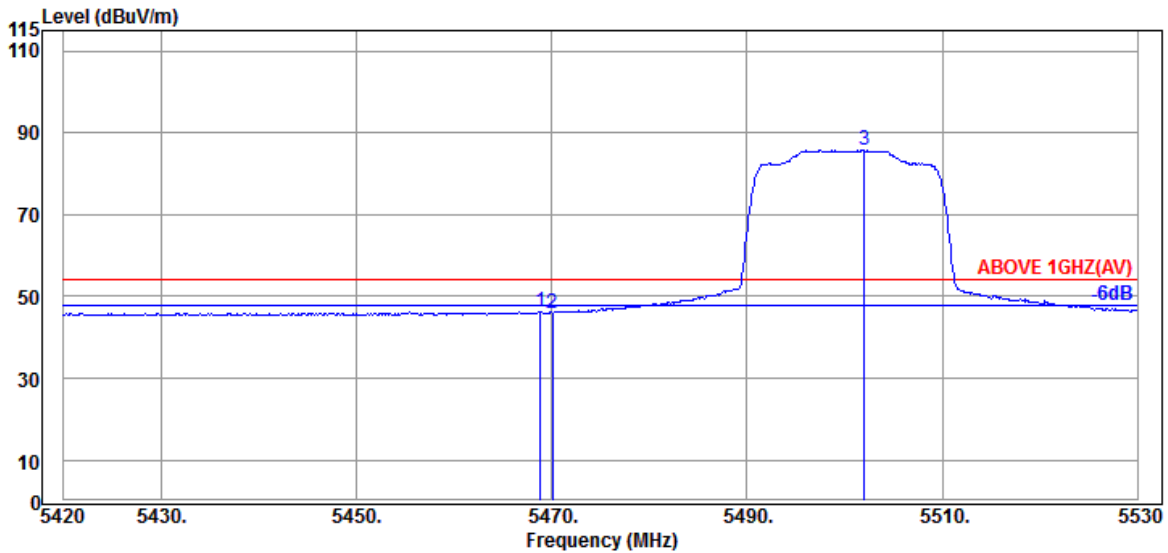


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.47	10.91	34.24	35.10	46.24	54.00	7.76	Average
5470.050	34.47	10.91	34.24	34.89	46.03	54.00	7.97	Average
@ 5502.060	34.40	10.93	34.24	74.57	85.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

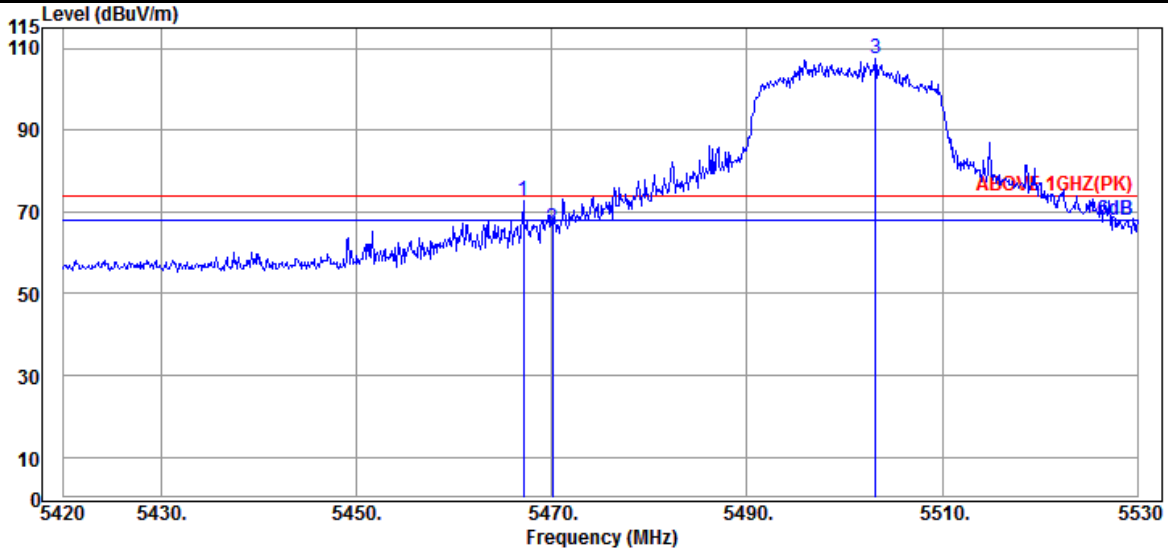

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.080	34.47	10.91	34.24	61.75	72.89	74.00	1.11	Peak
5470.050	34.47	10.91	34.24	55.00	66.14	74.00	7.86	Peak
@ 5503.160	34.40	10.93	34.24	96.42	107.51	---	---	Peak

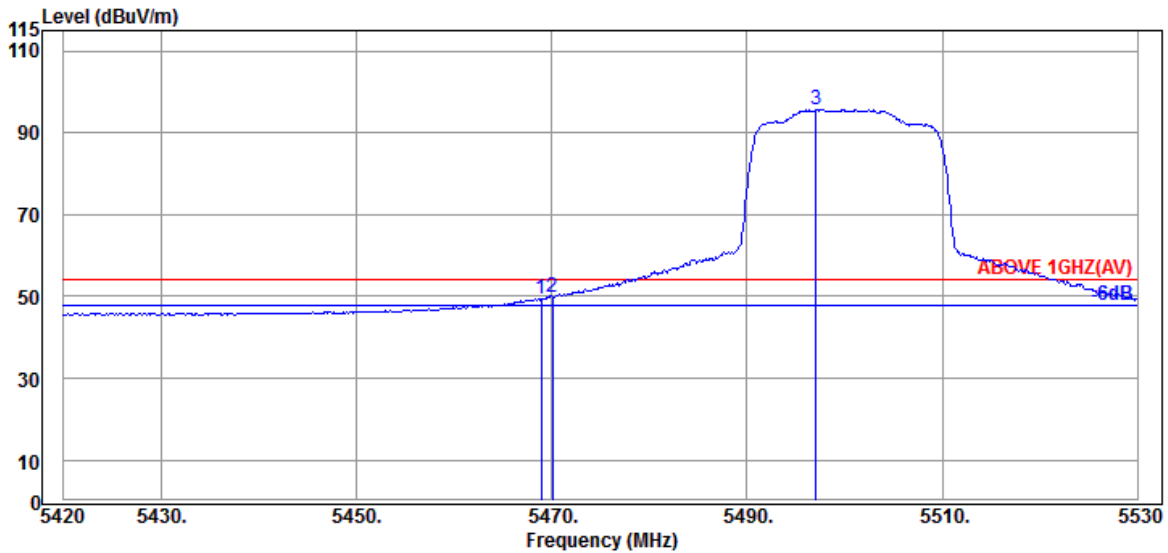


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	10.91	34.24	38.33	49.47	54.00	4.53	Average
5470.050	34.47	10.91	34.24	38.80	49.94	54.00	4.06	Average
@ 5497.110	34.40	10.93	34.23	84.55	95.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

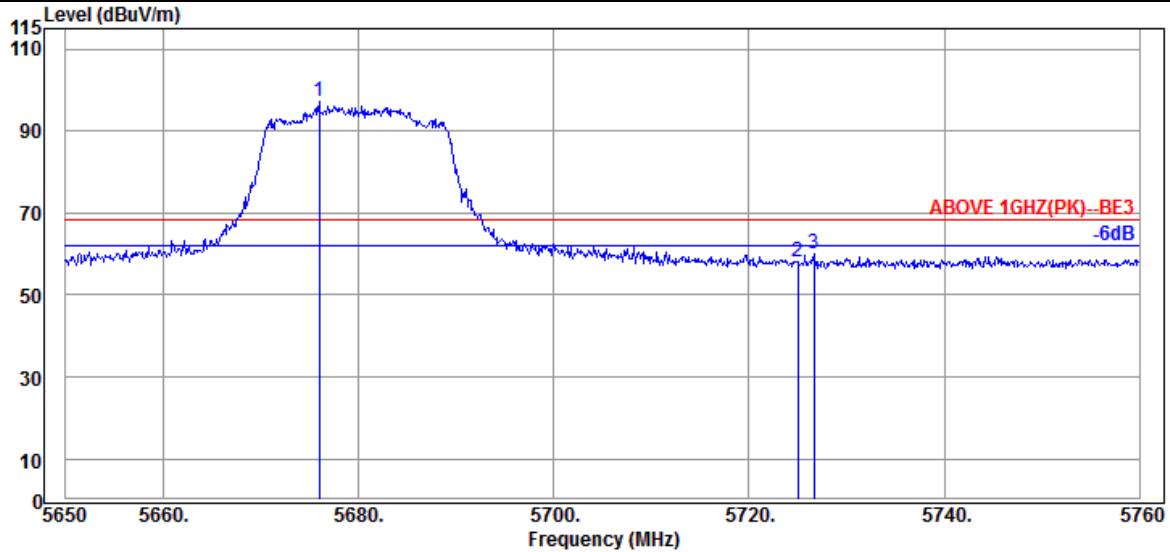

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.960	34.40	11.03	34.30	86.04	97.17	---	---	Peak
5725.020	34.67	11.05	34.32	46.65	58.05	68.20	10.15	Peak
5726.670	34.67	11.05	34.32	48.78	60.18	68.20	8.02	Peak

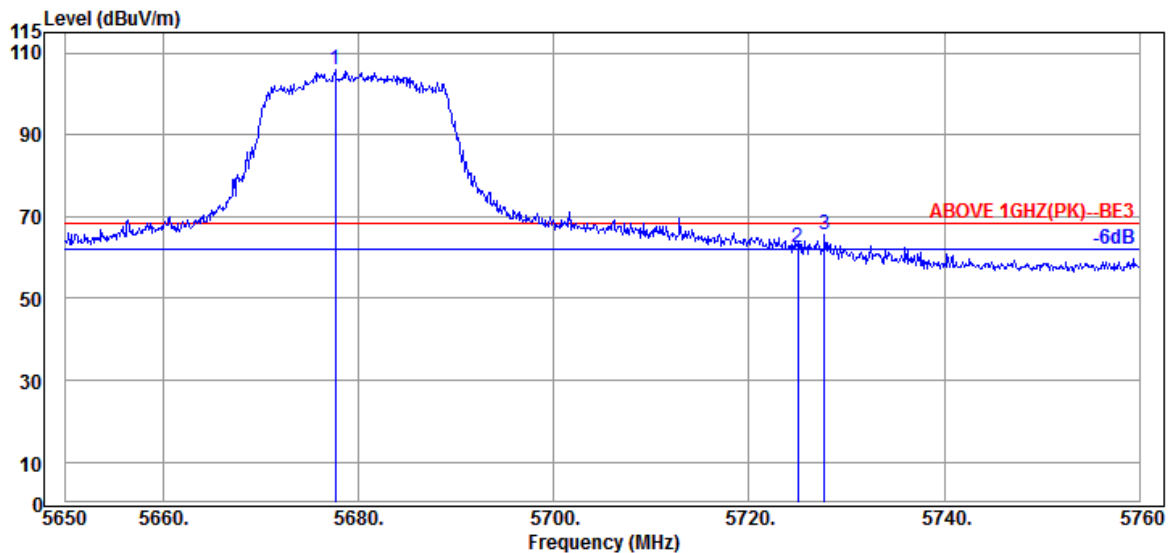


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.610	34.40	11.03	34.30	94.78	105.91	---	---	Peak
5725.020	34.67	11.05	34.32	51.16	62.56	68.20	5.64	Peak
5727.770	34.67	11.05	34.32	54.11	65.51	68.20	2.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

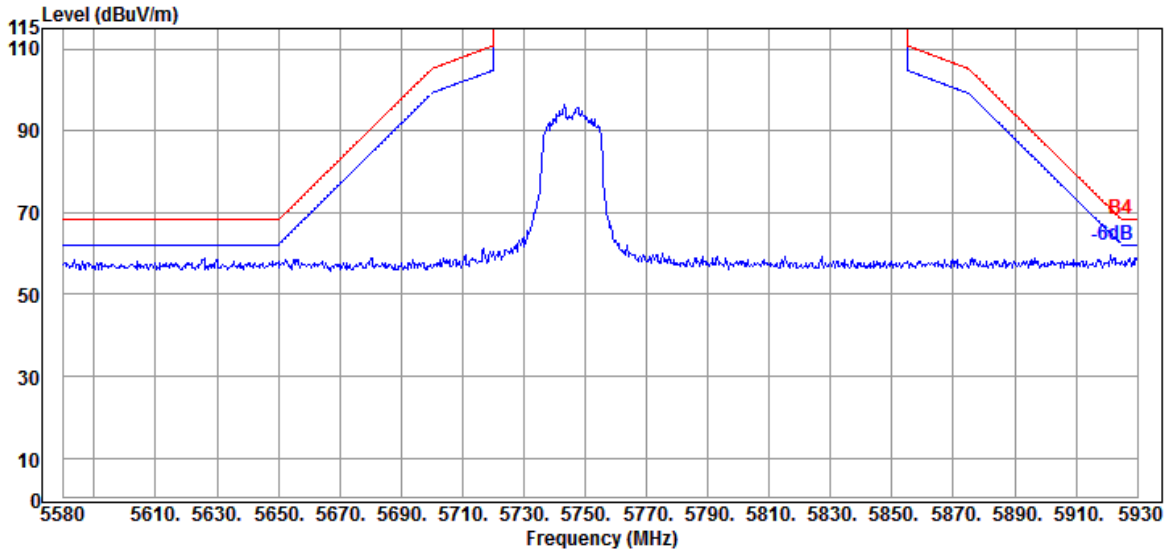


Antenna at Vertical Polarization

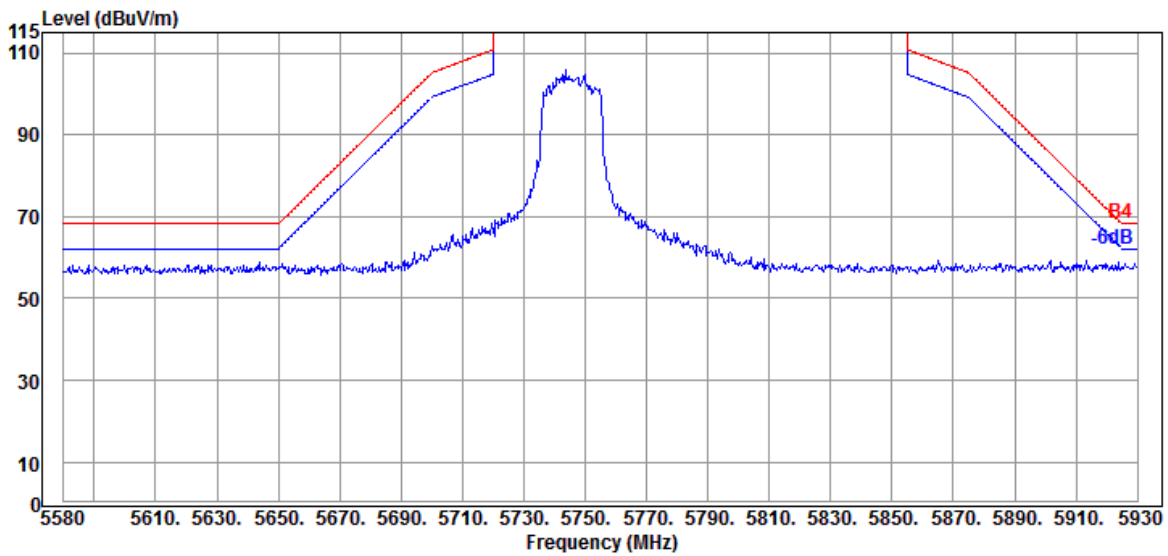


Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

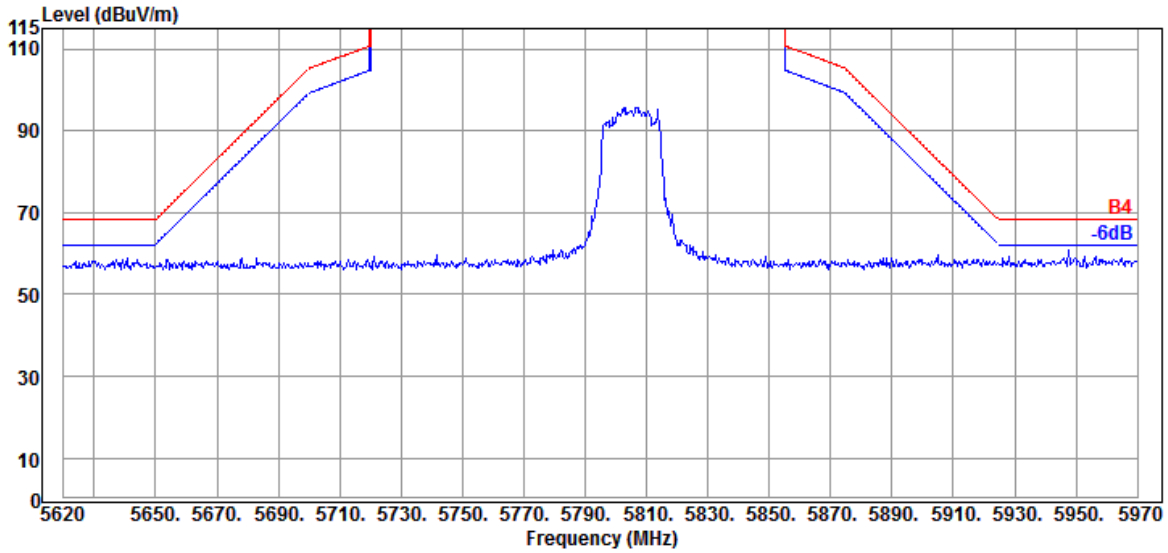

Antenna at Vertical Polarization

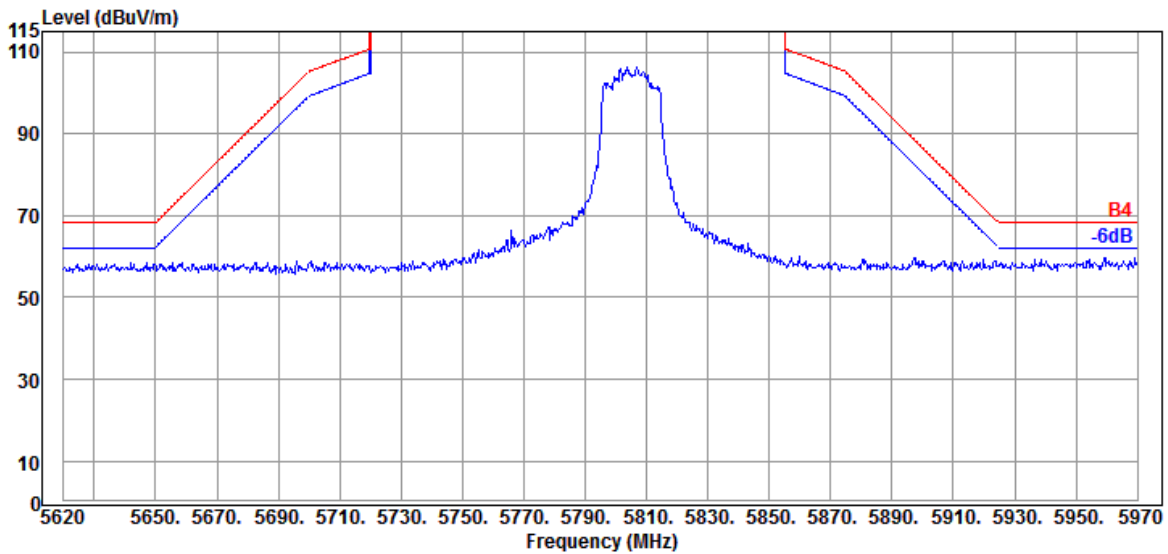


Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

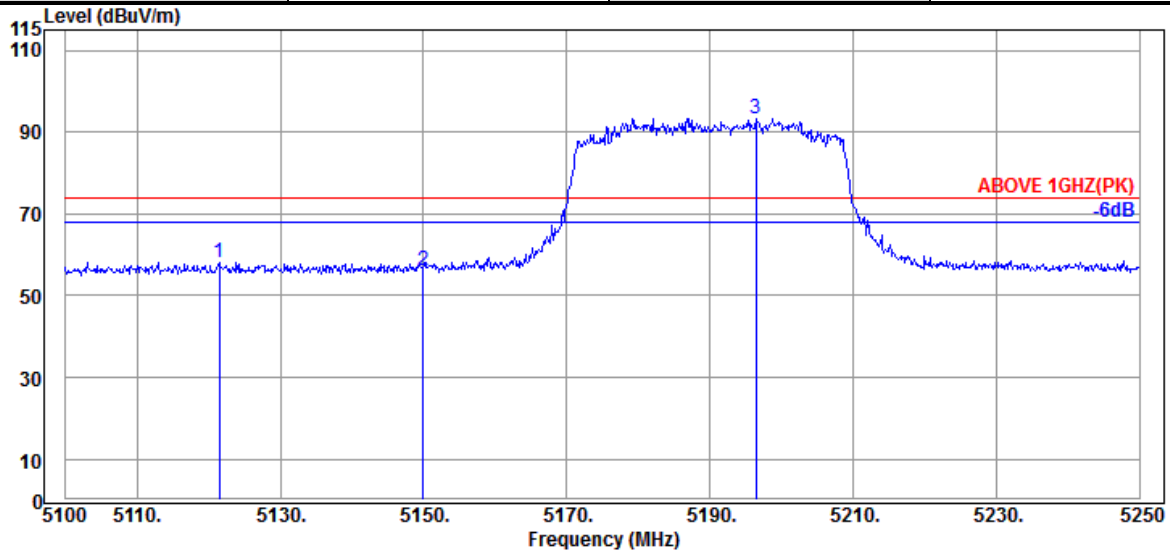

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.450	34.13	10.70	34.36	47.60	58.07	74.00	15.93	Peak
5149.950	34.20	10.70	34.35	45.70	56.25	74.00	17.75	Peak
@ 5196.450	34.20	10.74	34.33	82.69	93.30	---	---	Peak

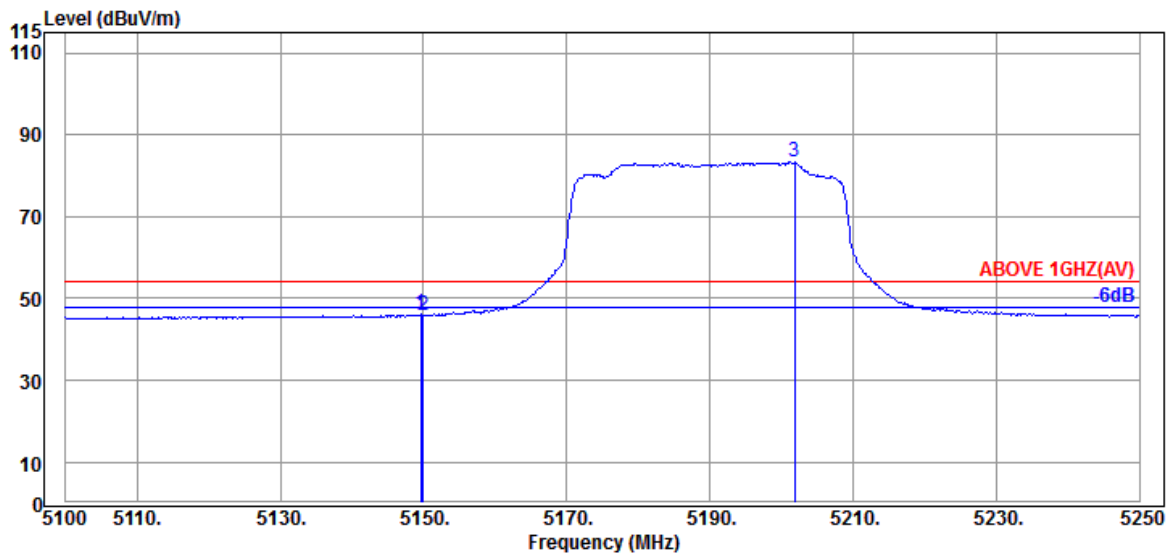


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	35.51	46.06	54.00	7.94	Average
5149.950	34.20	10.70	34.35	35.40	45.95	54.00	8.05	Average
@ 5201.850	34.25	10.74	34.33	72.62	83.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

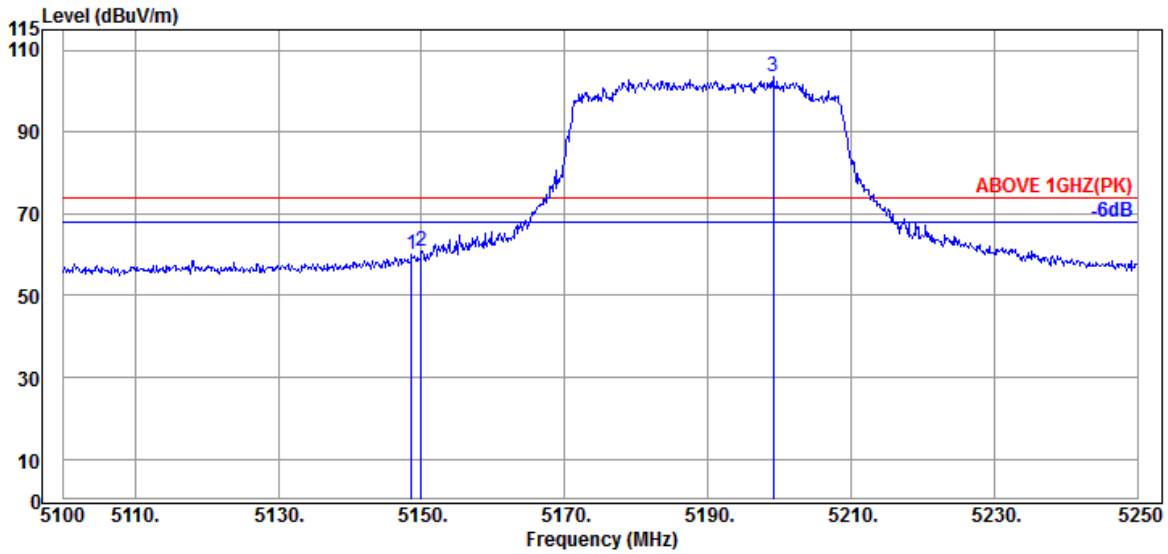

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.20	10.70	34.35	49.55	60.10	74.00	13.90	Peak
5149.950	34.20	10.70	34.35	50.38	60.93	74.00	13.07	Peak
@ 5199.150	34.20	10.74	34.33	92.77	103.38	---	---	Peak

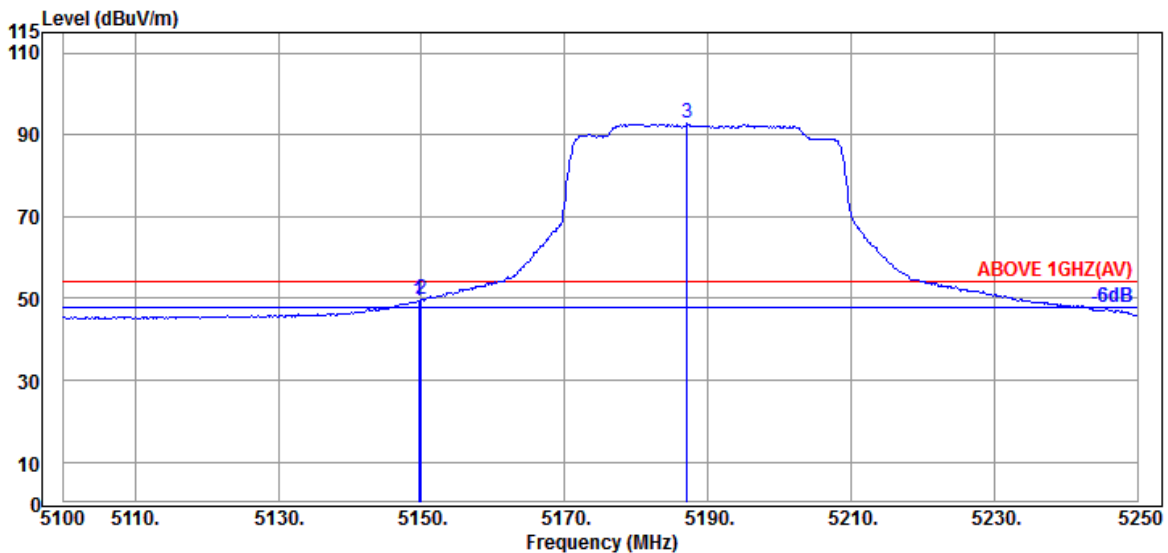


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	38.98	49.53	54.00	4.47	Average
5149.950	34.20	10.70	34.35	39.14	49.69	54.00	4.31	Average
@ 5187.150	34.20	10.74	34.34	82.18	92.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

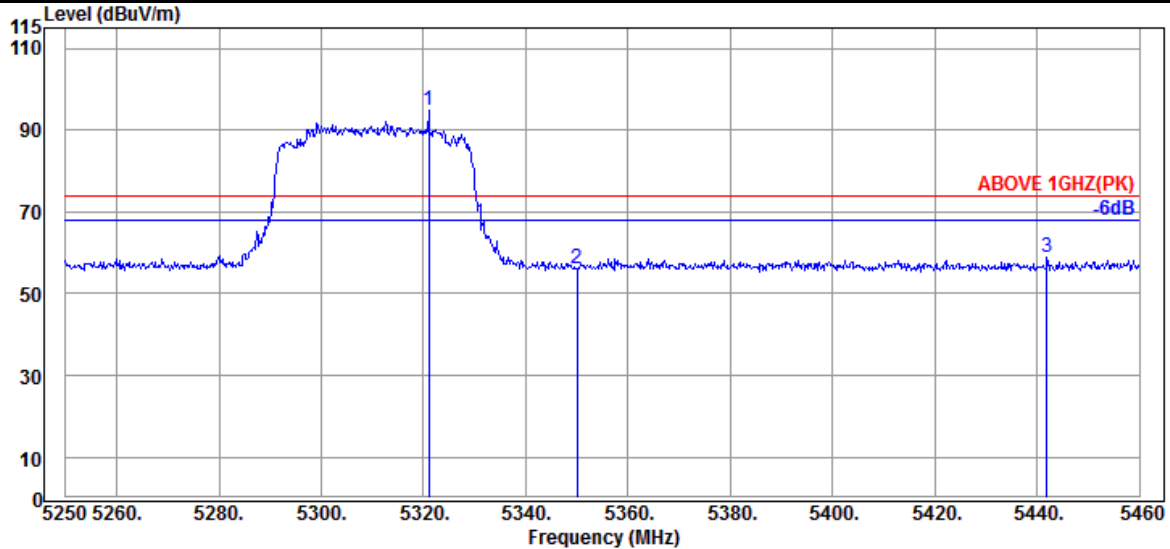

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.980	34.53	10.81	34.29	83.61	94.66	---	---	Peak
5349.960	34.60	10.83	34.27	45.08	56.24	74.00	17.76	Peak
5441.940	34.55	10.89	34.25	47.83	59.02	74.00	14.98	Peak

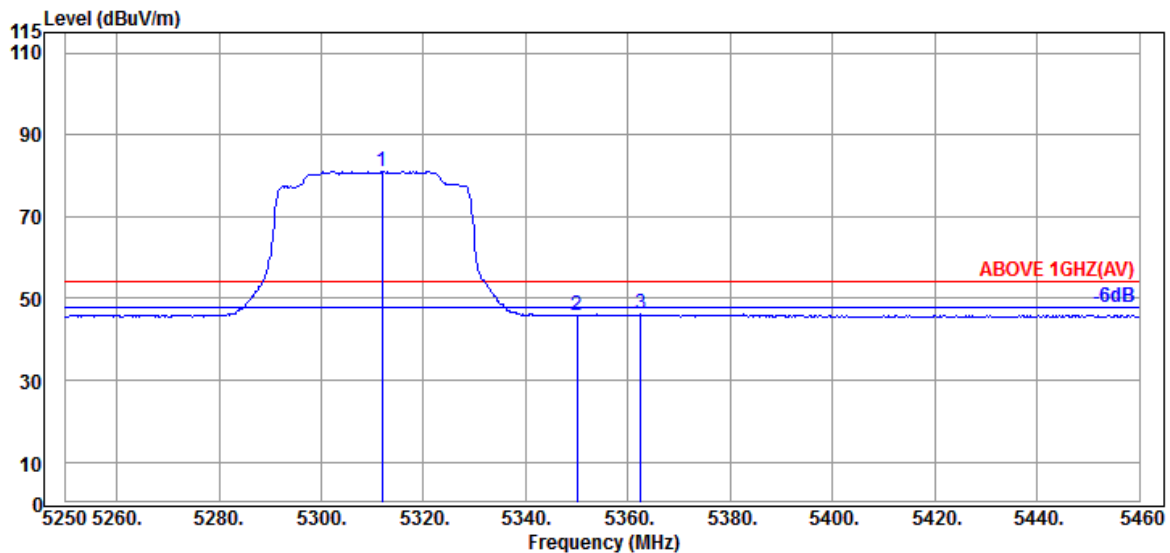


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.950	34.53	10.81	34.29	70.03	81.08	---	---	Average
5349.960	34.60	10.83	34.27	34.74	45.90	54.00	8.10	Average
5362.560	34.63	10.85	34.27	34.89	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

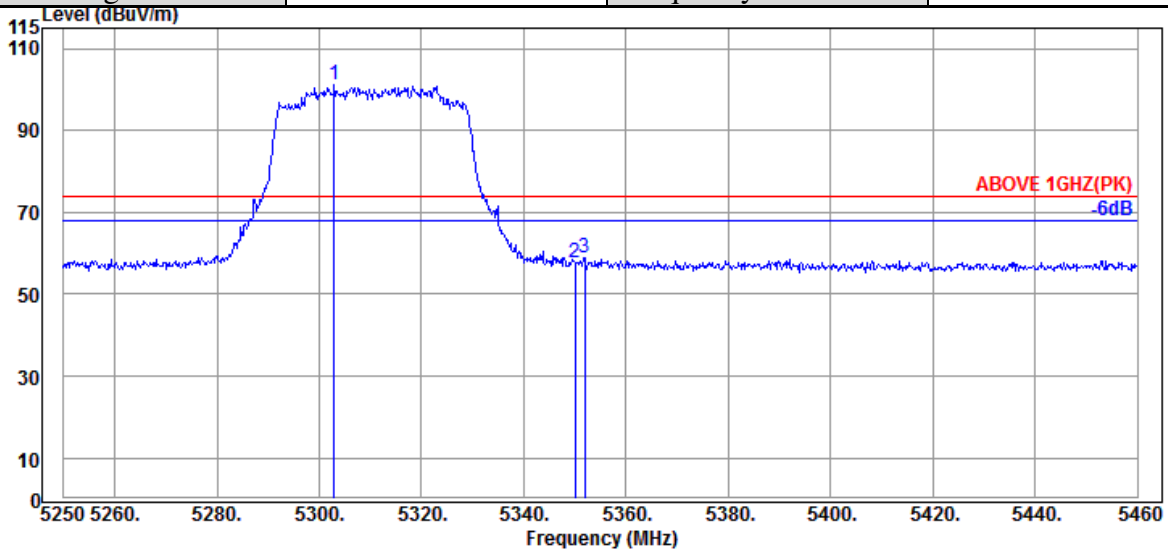

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.920	34.50	10.81	34.29	89.97	100.99	---	---	Peak
5349.960	34.60	10.83	34.27	46.38	57.54	74.00	16.46	Peak
5351.850	34.60	10.83	34.27	47.69	58.85	74.00	15.15	Peak

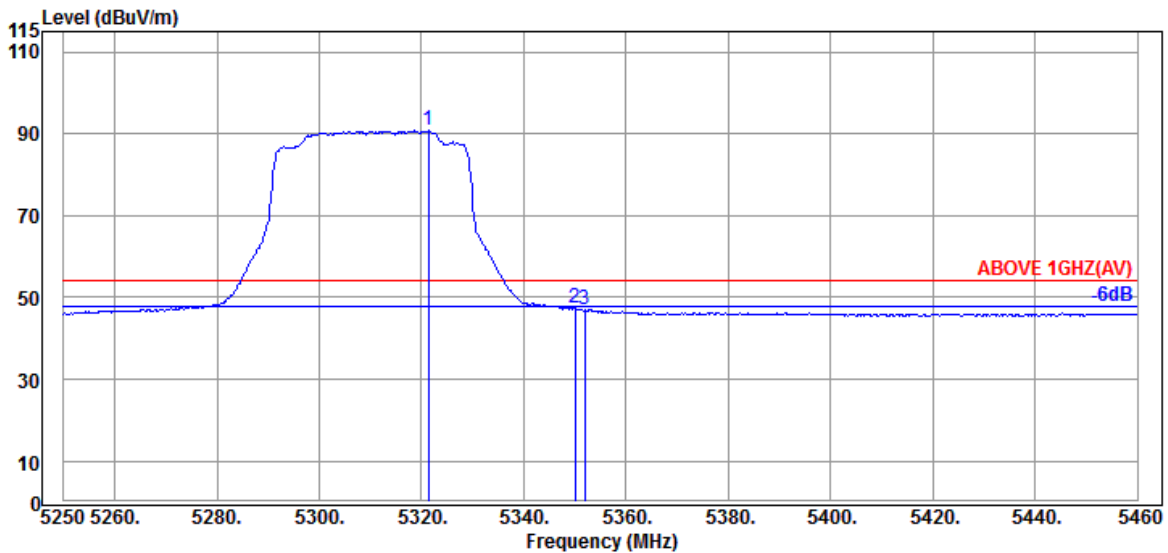


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.53	10.81	34.29	79.73	90.78	---	---	Average
5349.960	34.60	10.83	34.27	36.10	47.26	54.00	6.74	Average
5351.850	34.60	10.83	34.27	35.92	47.08	54.00	6.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

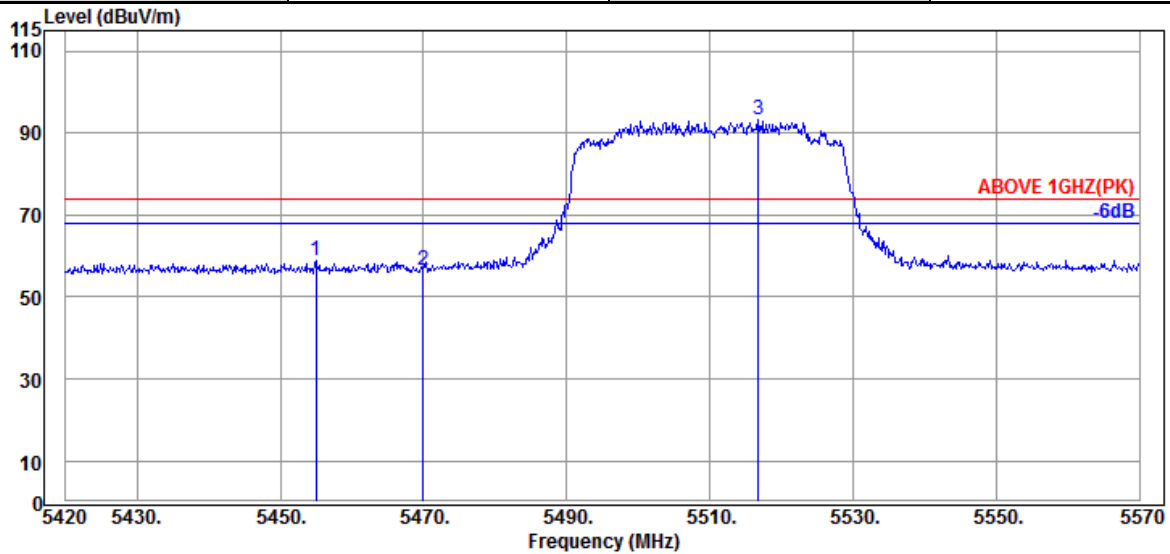

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.950	34.50	10.89	34.24	47.87	59.02	74.00	14.98	Peak
5469.950	34.47	10.91	34.24	45.51	56.65	74.00	17.35	Peak
@ 5516.750	34.37	10.93	34.24	82.04	93.10	---	---	Peak

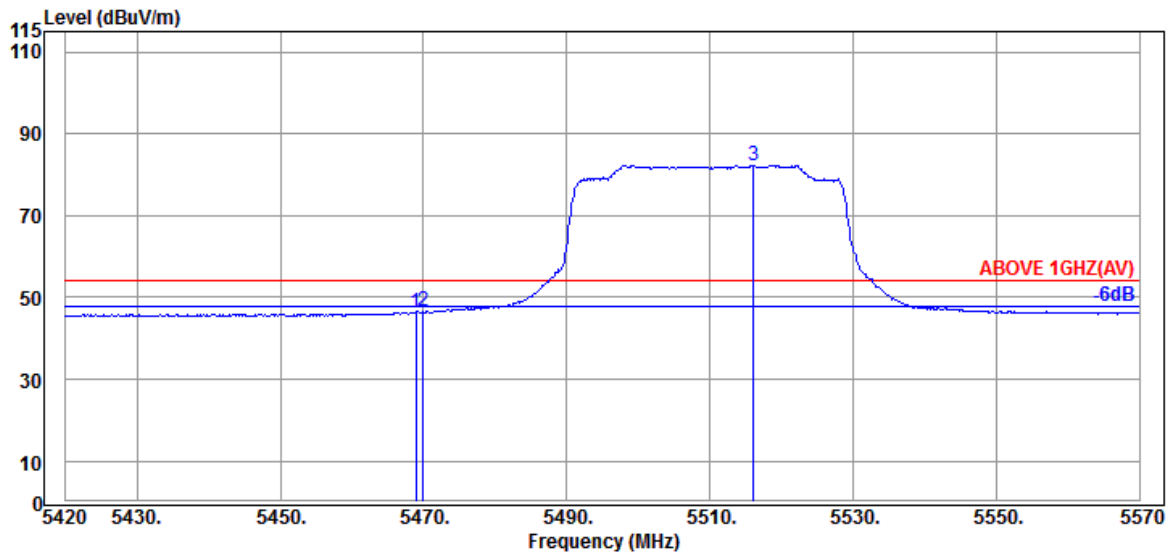


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	35.20	46.34	54.00	7.66	Average
5469.950	34.47	10.91	34.24	35.31	46.45	54.00	7.55	Average
@ 5516.150	34.37	10.93	34.24	71.33	82.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

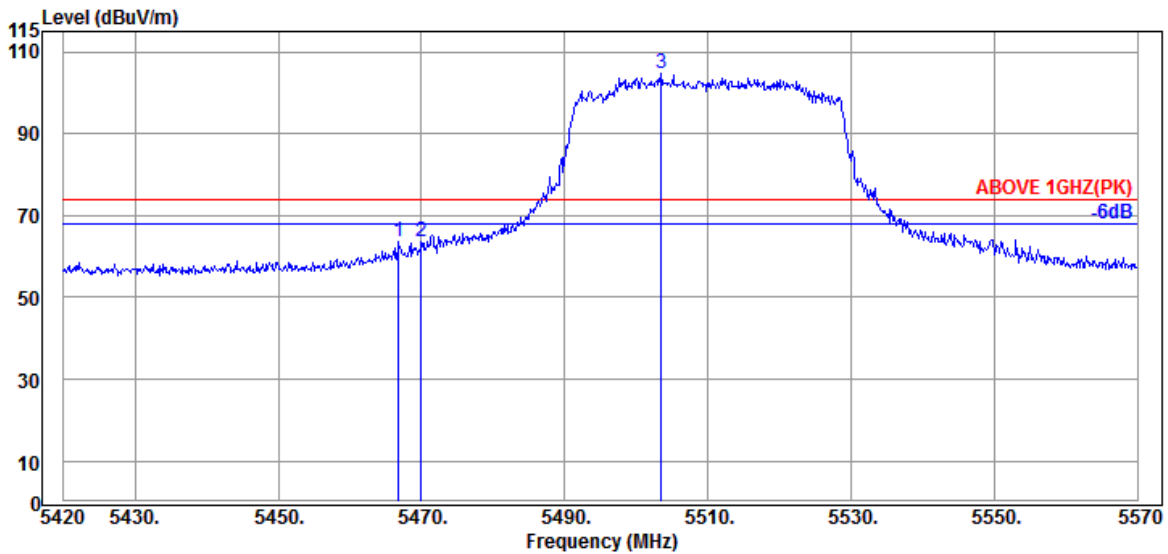

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.47	10.91	34.24	52.38	63.52	74.00	10.48	Peak
5469.950	34.47	10.91	34.24	52.38	63.52	74.00	10.48	Peak
@ 5503.550	34.40	10.93	34.24	93.52	104.61	---	---	Peak

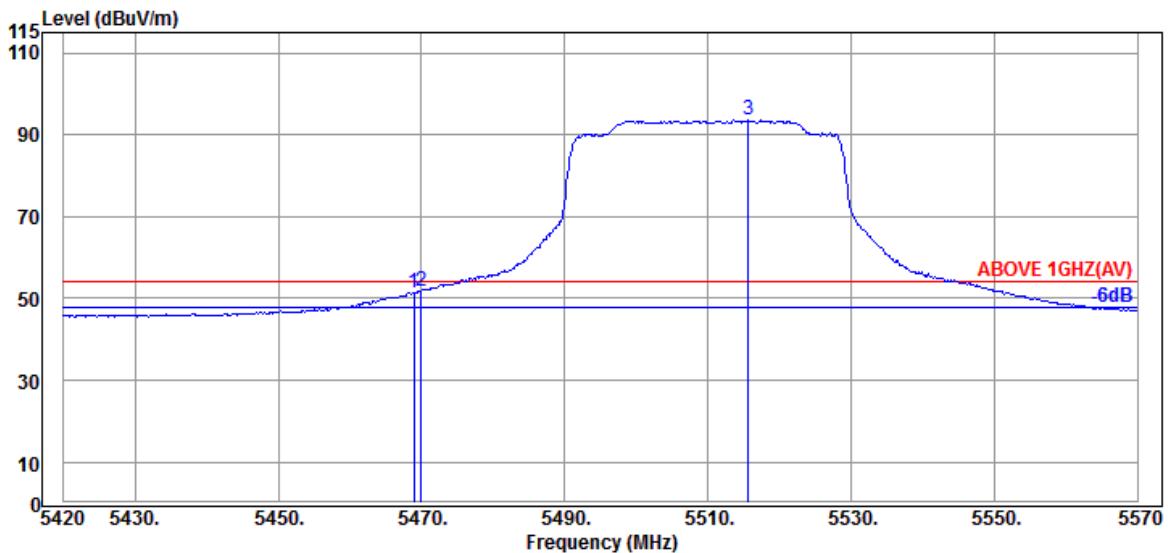


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	40.33	51.47	54.00	2.53	Average
5469.950	34.47	10.91	34.24	40.81	51.95	54.00	2.05	Average
@ 5515.700	34.37	10.93	34.24	82.51	93.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

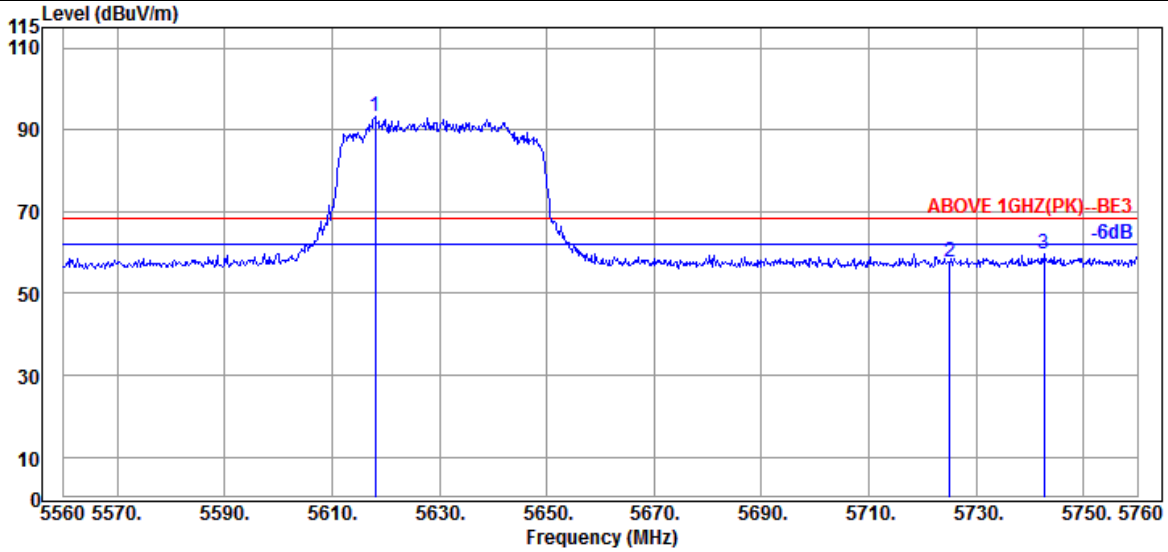

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.000	34.40	10.99	34.28	82.10	93.21	---	---	Peak
5725.000	34.67	11.05	34.32	46.13	57.53	68.20	10.67	Peak
5742.600	34.80	11.05	34.33	48.10	59.62	68.20	8.58	Peak

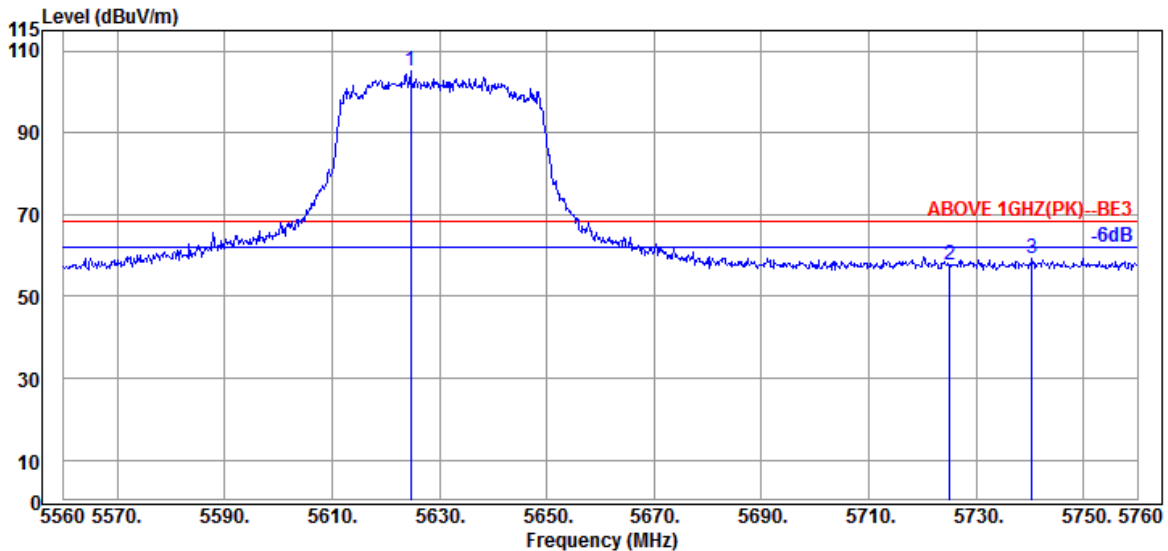


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.600	34.40	10.99	34.28	93.95	105.06	---	---	Peak
5725.000	34.67	11.05	34.32	46.41	57.81	68.20	10.39	Peak
5740.400	34.80	11.05	34.33	47.84	59.36	68.20	8.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

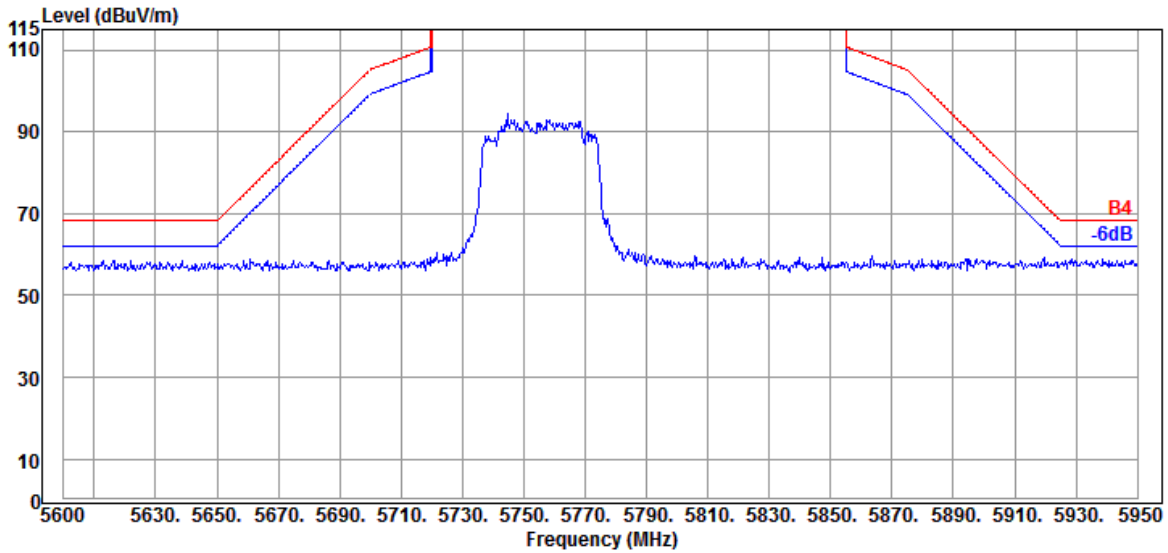


Antenna at Vertical Polarization

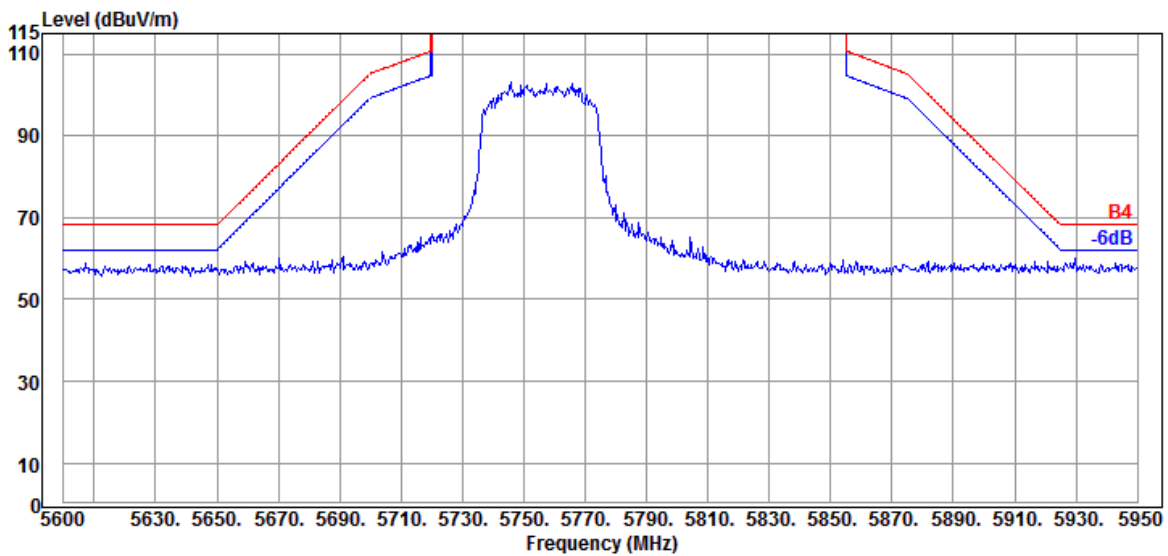


Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

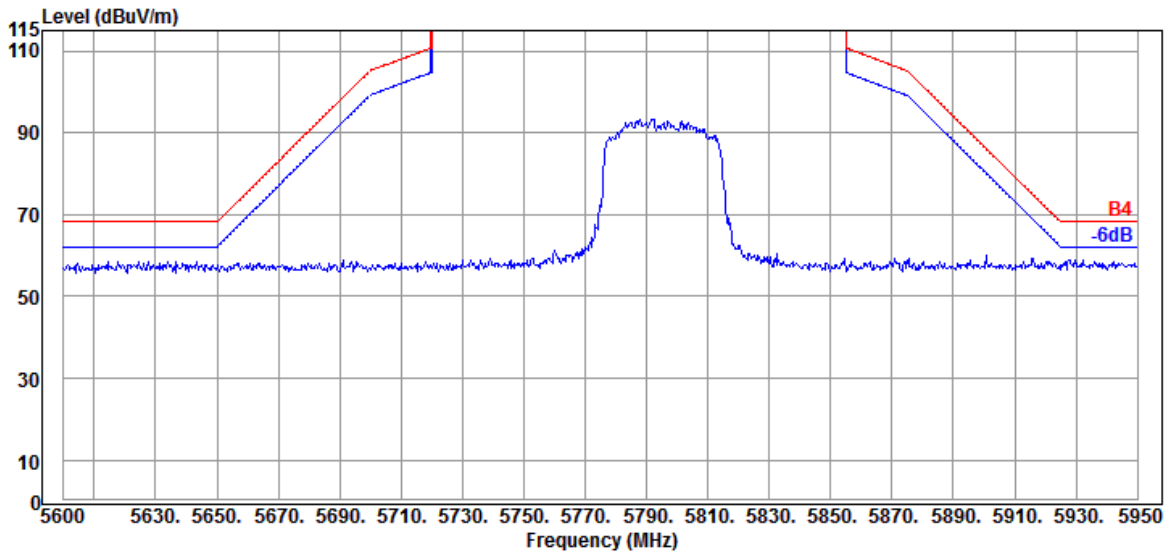

Antenna at Vertical Polarization

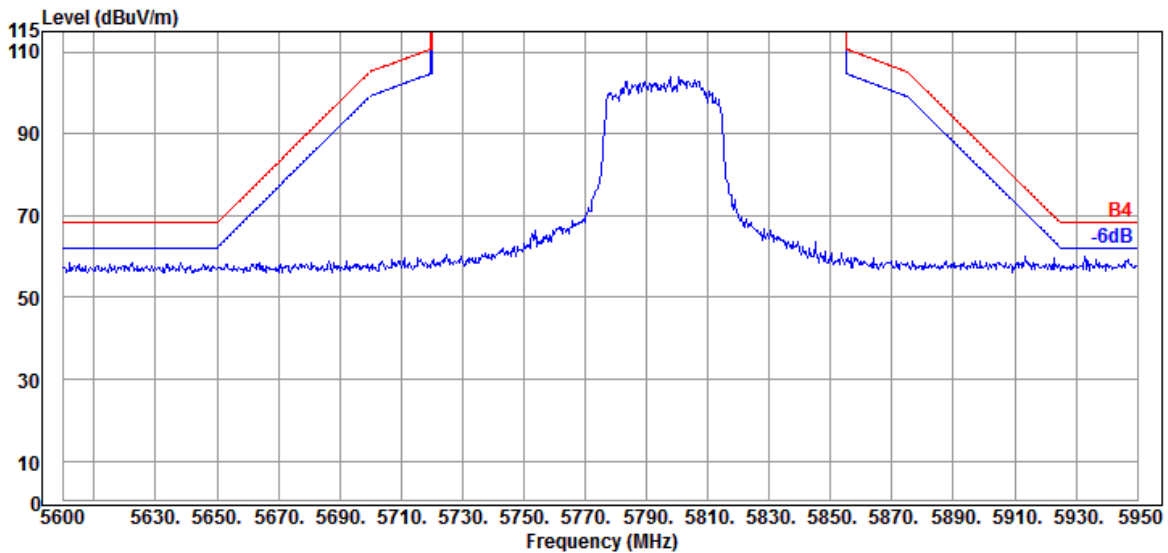


Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

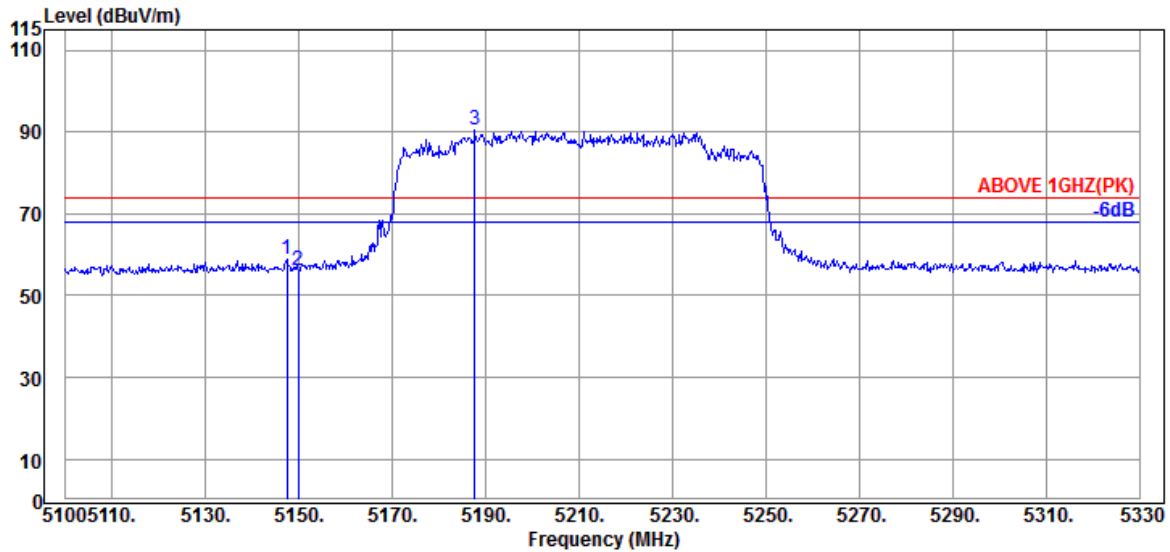

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.380	34.20	10.70	34.35	48.19	58.74	74.00	15.26	Peak
5149.910	34.20	10.70	34.35	45.54	56.09	74.00	17.91	Peak
@ 5187.630	34.20	10.74	34.34	79.70	90.30	---	---	Peak

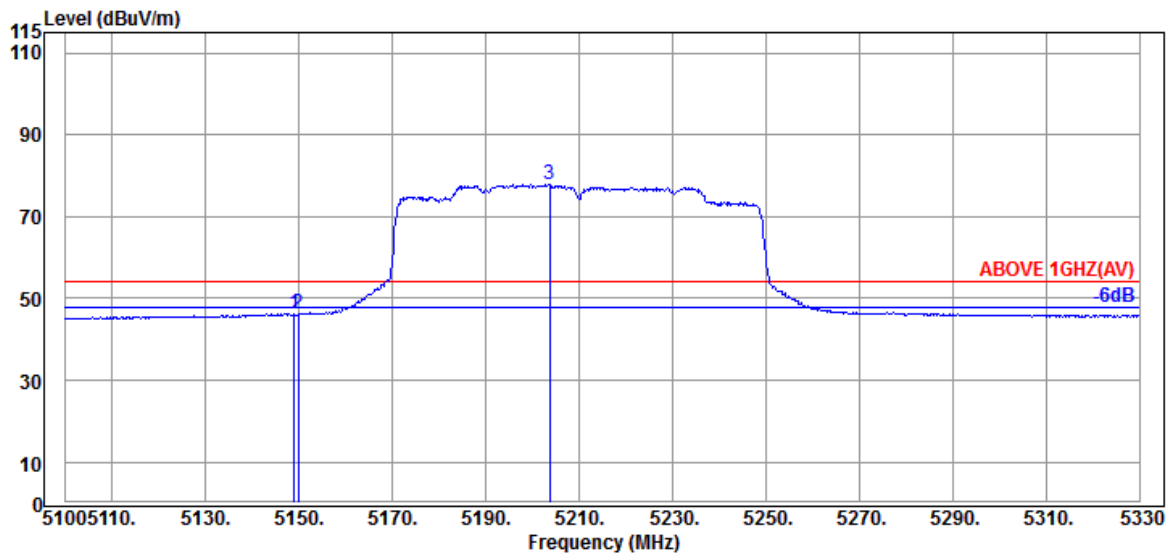


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.990	34.20	10.70	34.35	35.71	46.26	54.00	7.74	Average
5149.910	34.20	10.70	34.35	35.49	46.04	54.00	7.96	Average
@ 5203.730	34.25	10.74	34.33	67.29	77.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

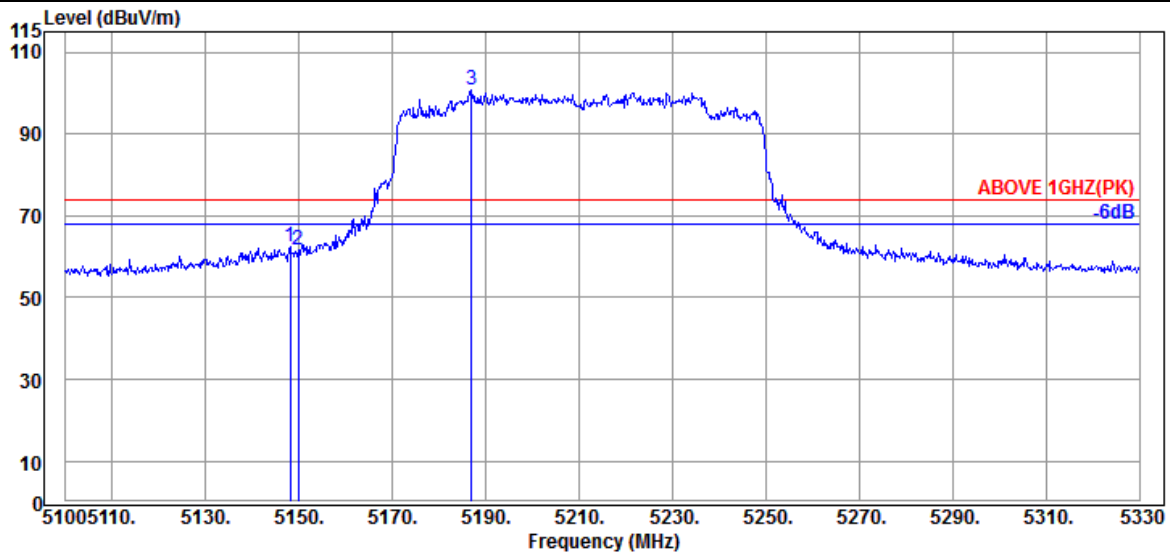

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	34.20	10.70	34.35	51.76	62.31	74.00	11.69	Peak
5149.910	34.20	10.70	34.35	51.14	61.69	74.00	12.31	Peak
@ 5186.940	34.20	10.72	34.34	90.12	100.70	---	---	Peak

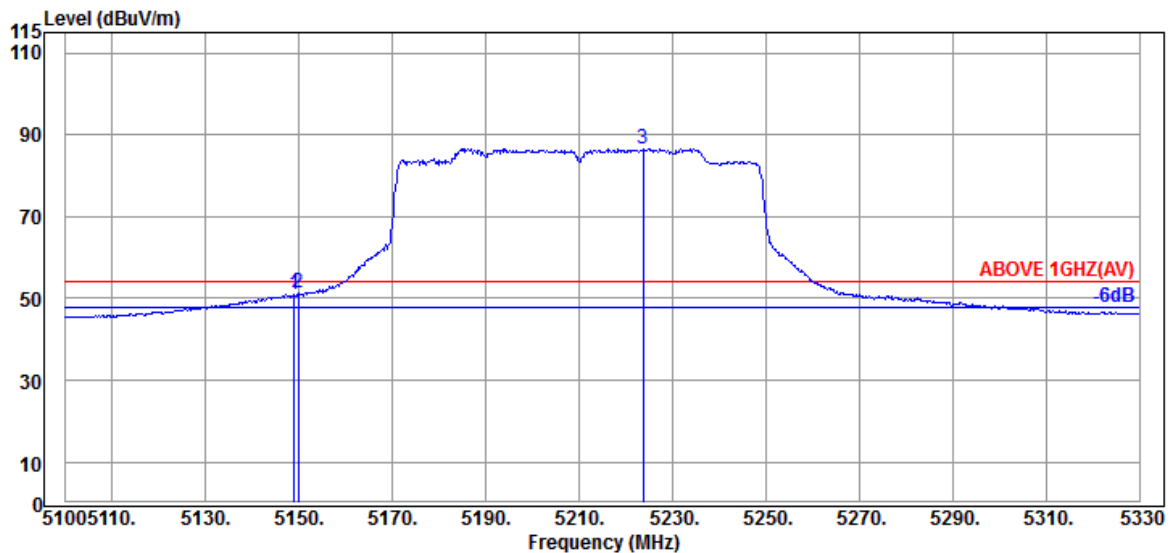


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.20	10.70	34.35	40.54	51.09	54.00	2.91	Average
5149.910	34.20	10.70	34.35	40.64	51.19	54.00	2.81	Average
@ 5223.740	34.30	10.76	34.32	75.91	86.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

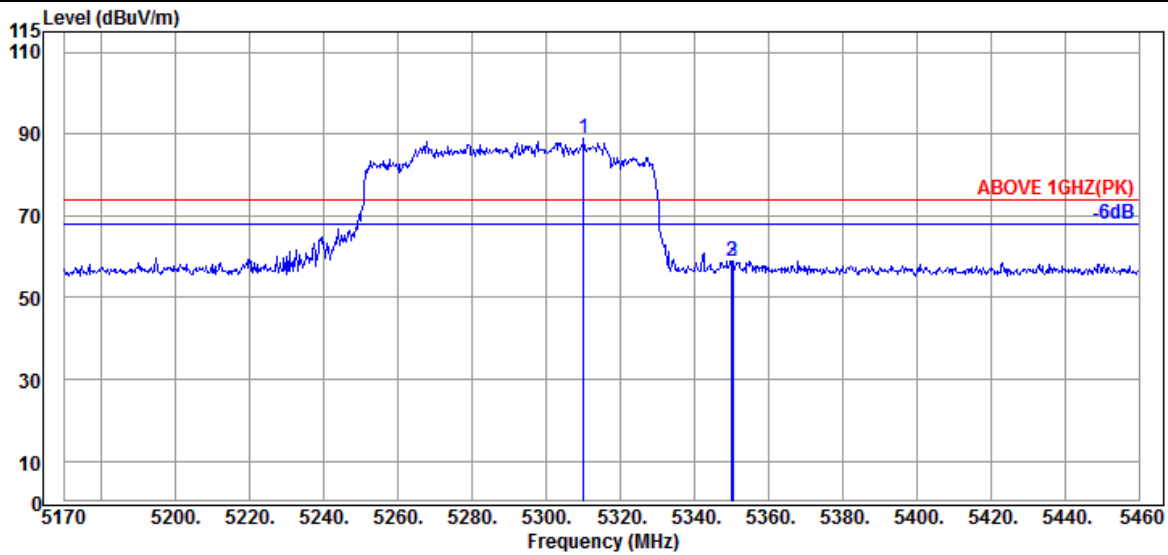

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.070	34.53	10.81	34.29	77.84	88.89	---	---	Peak
5350.090	34.60	10.83	34.27	47.74	58.90	74.00	15.10	Peak
5350.380	34.60	10.83	34.27	47.62	58.78	74.00	15.22	Peak

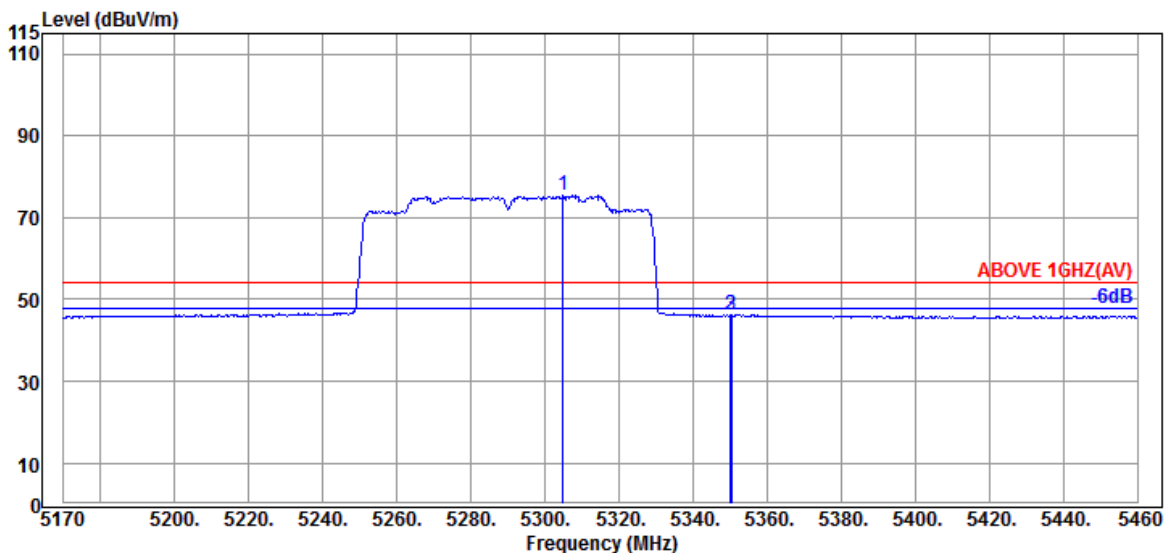


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.850	34.50	10.81	34.29	64.60	75.62	---	---	Average
5350.090	34.60	10.83	34.27	34.93	46.09	54.00	7.91	Average
5350.380	34.60	10.83	34.27	35.05	46.21	54.00	7.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

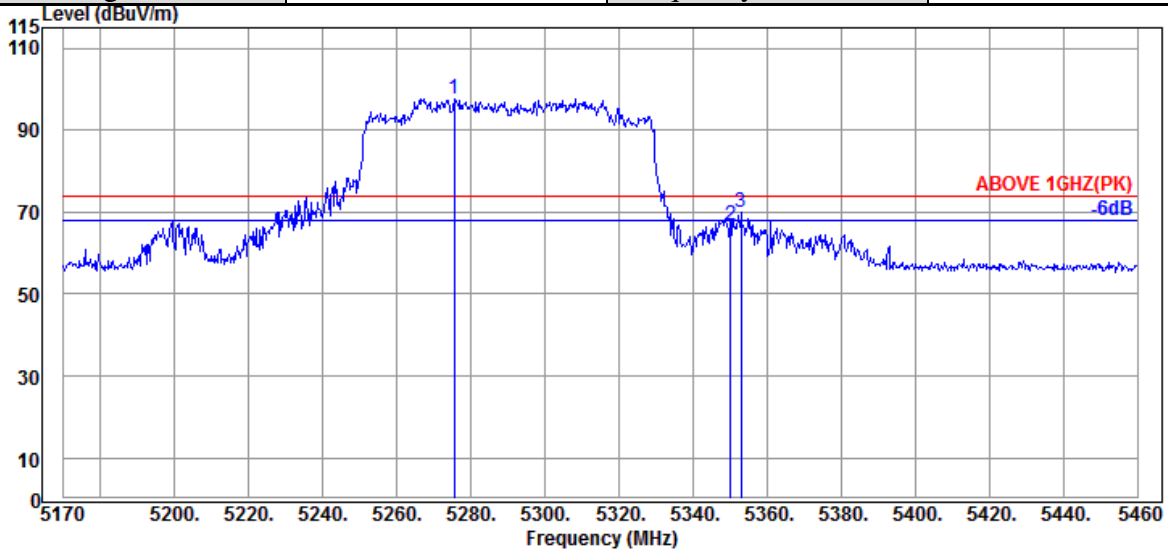

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.560	34.43	10.79	34.30	86.86	97.78	---	---	Peak
5350.090	34.60	10.83	34.27	55.57	66.73	74.00	7.27	Peak
5352.990	34.60	10.83	34.27	58.90	70.06	74.00	3.94	Peak

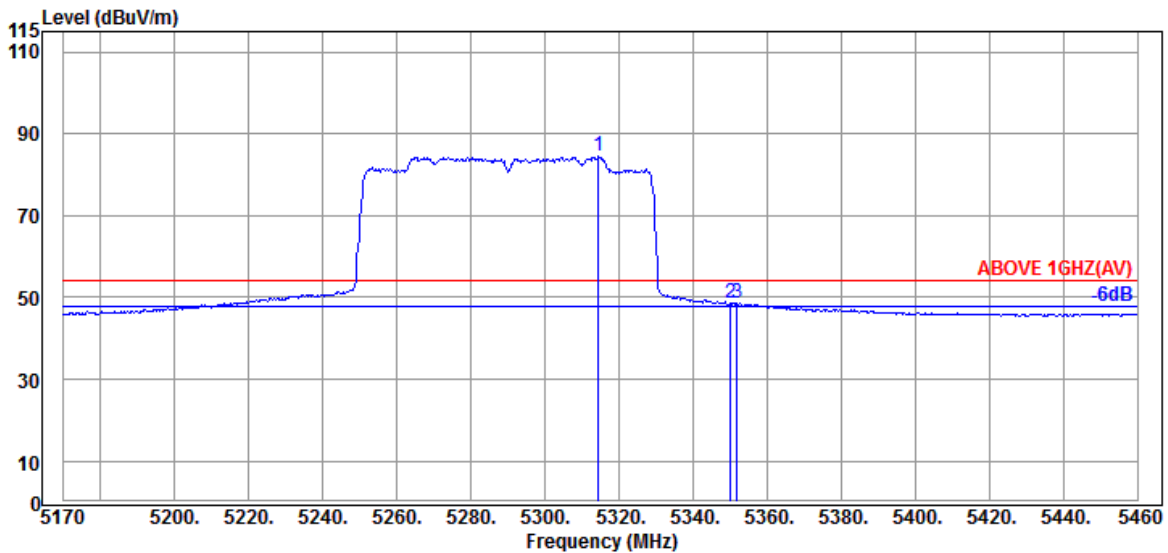


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.420	34.53	10.81	34.29	73.48	84.53	---	---	Average
5350.090	34.60	10.83	34.27	37.46	48.62	54.00	5.38	Average
5351.830	34.60	10.83	34.27	37.56	48.72	54.00	5.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

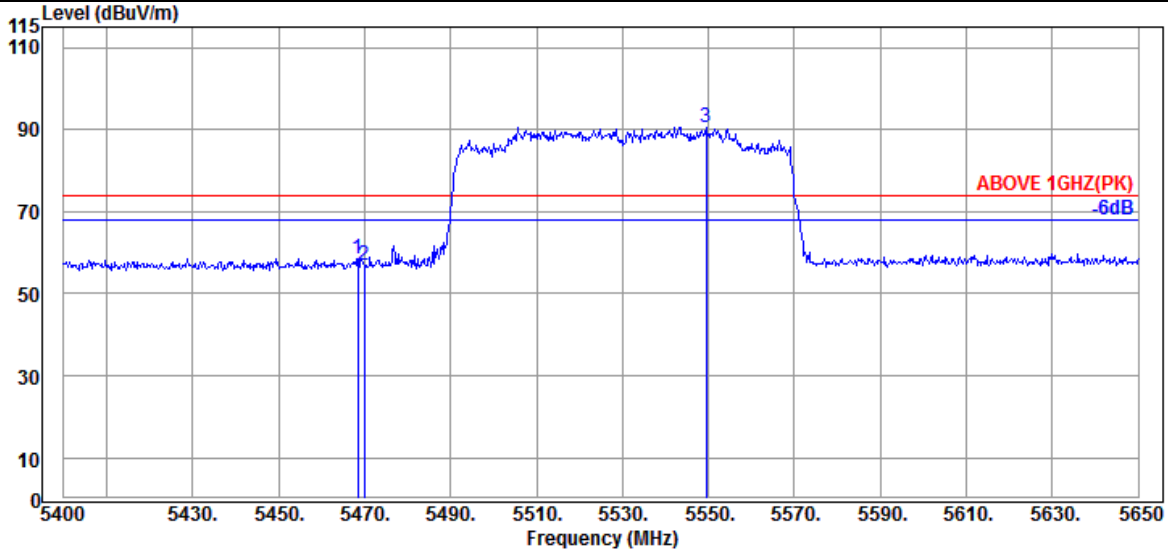

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.47	10.91	34.24	47.35	58.49	74.00	15.51	Peak
5470.000	34.47	10.91	34.24	45.88	57.02	74.00	16.98	Peak
@ 5549.500	34.30	10.95	34.25	79.69	90.69	---	---	Peak

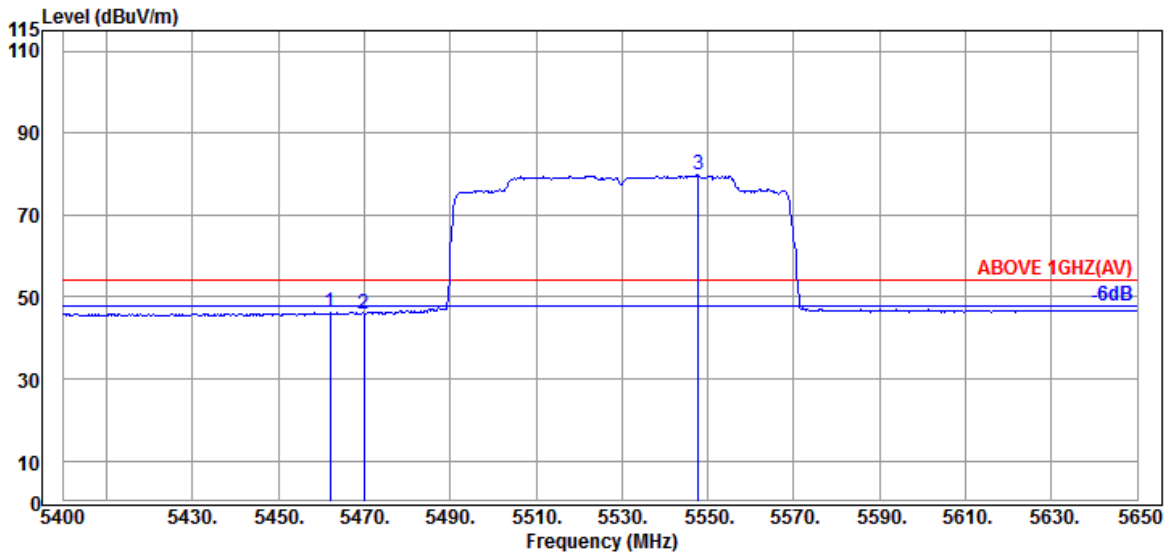


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.50	10.91	34.24	35.07	46.24	54.00	7.76	Average
5470.000	34.47	10.91	34.24	34.87	46.01	54.00	7.99	Average
@ 5547.750	34.30	10.95	34.25	68.76	79.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

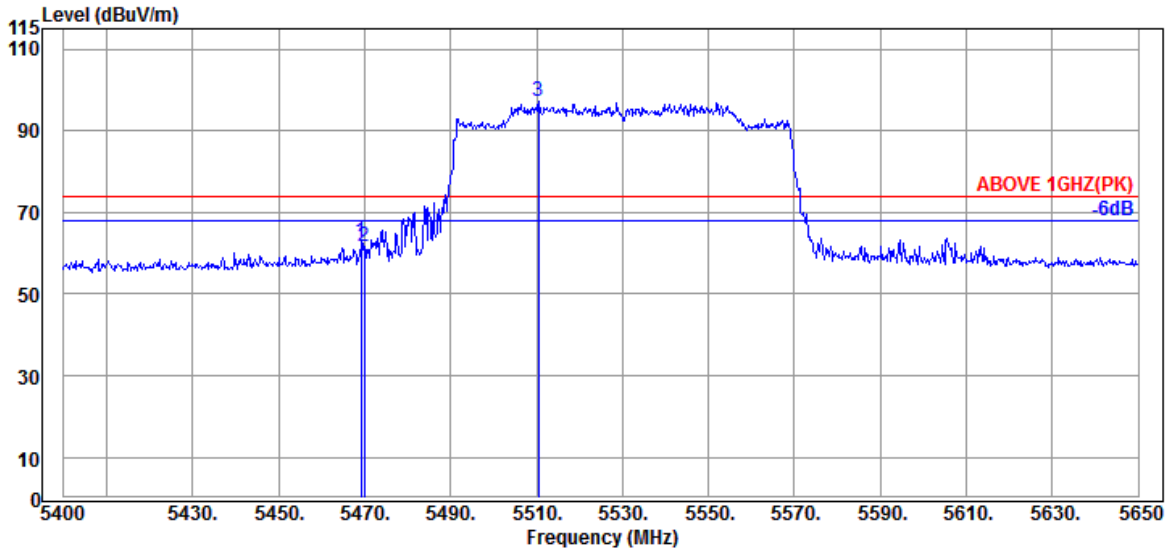

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.250	34.47	10.91	34.24	51.51	62.65	74.00	11.35	Peak
5470.000	34.47	10.91	34.24	50.70	61.84	74.00	12.16	Peak
@ 5510.500	34.40	10.93	34.24	86.18	97.27	---	---	Peak

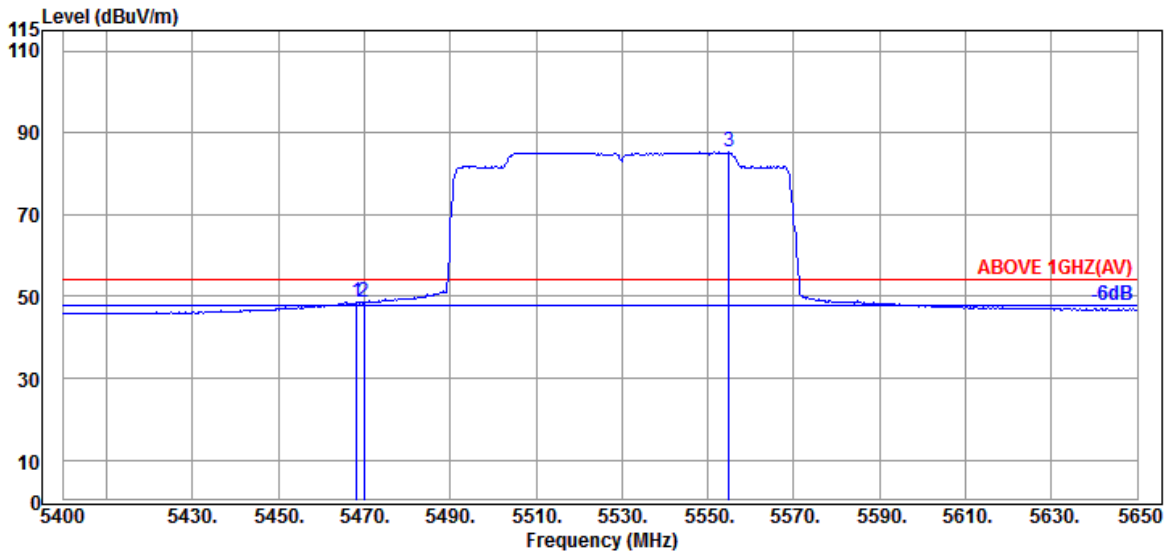


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.47	10.91	34.24	37.35	48.49	54.00	5.51	Average
5470.000	34.47	10.91	34.24	37.46	48.60	54.00	5.40	Average
@ 5555.000	34.30	10.95	34.26	74.20	85.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

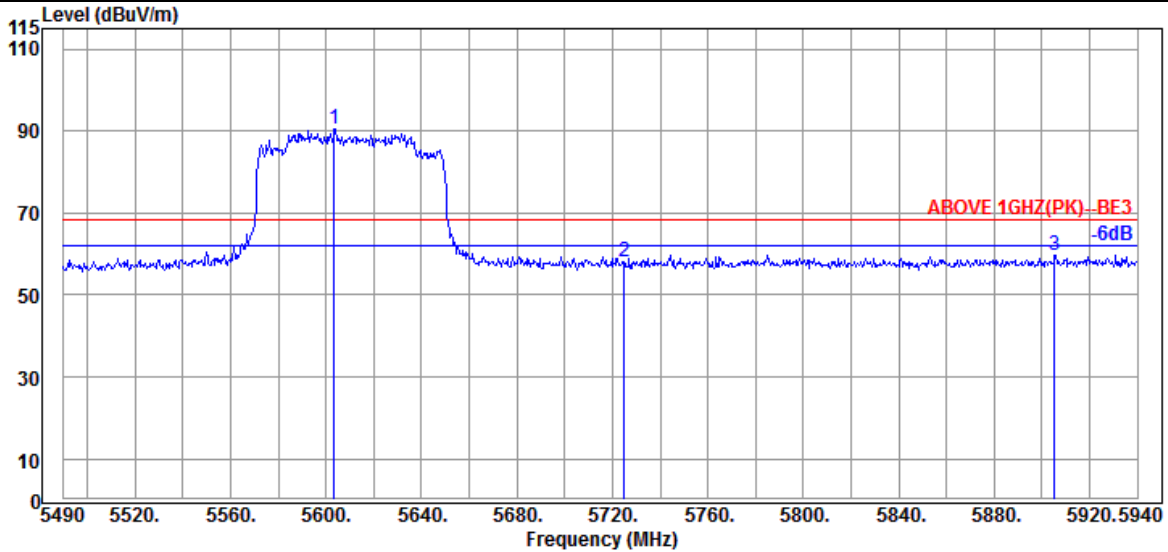

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5603.400	34.40	10.99	34.28	79.52	90.63	---	---	Peak
5724.900	34.67	11.05	34.32	46.81	58.21	68.20	9.99	Peak
5905.350	35.40	11.14	34.40	47.61	59.75	68.20	8.45	Peak

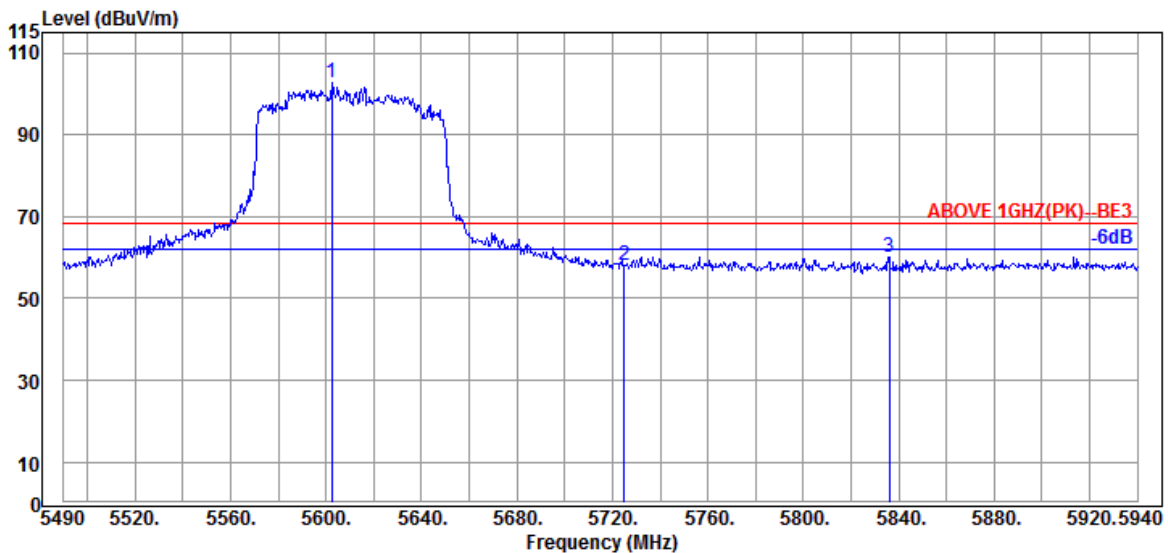

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5602.500	34.40	10.99	34.27	91.70	102.82	---	---	Peak
5724.900	34.67	11.05	34.32	46.82	58.22	68.20	9.98	Peak
5836.050	35.07	11.10	34.38	48.33	60.12	68.20	8.08	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.77	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.74	48.72	54.00	5.28	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.19	48.28	54.00	5.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.25	48.34	54.00	5.66	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	30.48	49.40	54.00	4.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	33.43	52.35	54.00	1.65	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	30.15	49.55	54.00	4.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	31.88	51.28	54.00	2.72	Peak

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	30.01	49.47	54.00	4.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	31.48	50.94	54.00	3.06	Peak

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.55	48.53	54.00	5.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.89	48.87	54.00	5.13	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.74	48.83	54.00	5.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.53	48.62	54.00	5.38	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.54	48.46	54.00	5.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	30.75	49.67	54.00	4.33	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.89	49.29	54.00	4.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	31.07	50.47	54.00	3.53	Peak

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	31.13	50.70	54.00	3.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	31.08	50.65	54.00	3.35	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.75	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.43	48.33	54.00	5.67	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	31.63	49.76	54.00	4.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	30.56	48.69	54.00	5.31	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.86	49.08	54.00	4.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.73	48.95	54.00	5.05	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.97	49.37	54.00	4.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	30.40	49.80	54.00	4.20	Peak

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	31.92	51.52	54.00	2.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	30.77	50.37	54.00	3.63	Peak

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	31.71	49.52	54.00	4.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	30.44	48.25	54.00	5.75	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	29.39	47.61	54.00	6.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	30.24	48.46	54.00	5.54	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.15	48.20	54.00	5.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.86	48.91	54.00	5.09	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.81	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	29.04	48.32	54.00	5.68	Peak

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	30.24	49.78	54.00	4.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	31.91	51.45	54.00	2.55	Peak

Mode	802.11ac-VHT160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	30.57	48.66	54.00	5.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	30.39	48.48	54.00	5.52	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	30.06	48.92	54.00	5.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	30.01	48.87	54.00	5.13	Peak

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.93	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	31.86	49.84	54.00	4.16	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.62	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.77	48.86	54.00	5.14	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	30.23	49.15	54.00	4.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	30.23	49.15	54.00	4.85	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	30.68	50.08	54.00	3.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	31.03	50.43	54.00	3.57	Peak

Mode	802.11ax-HE20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.58	50.15	54.00	3.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	31.62	51.19	54.00	2.81	Peak

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.88	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.13	48.03	54.00	5.97	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	31.11	49.24	54.00	4.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	30.71	48.84	54.00	5.16	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	30.79	50.01	54.00	3.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	30.49	49.71	54.00	4.29	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	30.24	49.64	54.00	4.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	30.35	49.75	54.00	4.25	Peak

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	31.37	50.97	54.00	3.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	29.05	48.65	54.00	5.35	Peak

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	31.16	48.97	54.00	5.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	29.94	47.75	54.00	6.25	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	30.59	48.81	54.00	5.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	29.09	47.31	54.00	6.69	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	30.55	49.60	54.00	4.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	30.25	49.30	54.00	4.70	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	30.50	49.78	54.00	4.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	31.05	50.33	54.00	3.67	Peak

Mode	802.11ax-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	30.27	49.81	54.00	4.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	31.38	50.92	54.00	3.08	Peak

Mode	802.11ax-HE160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	30.59	48.68	54.00	5.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	30.84	48.93	54.00	5.07	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	31.37	50.23	54.00	3.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	30.21	49.07	54.00	4.93	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.