





Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

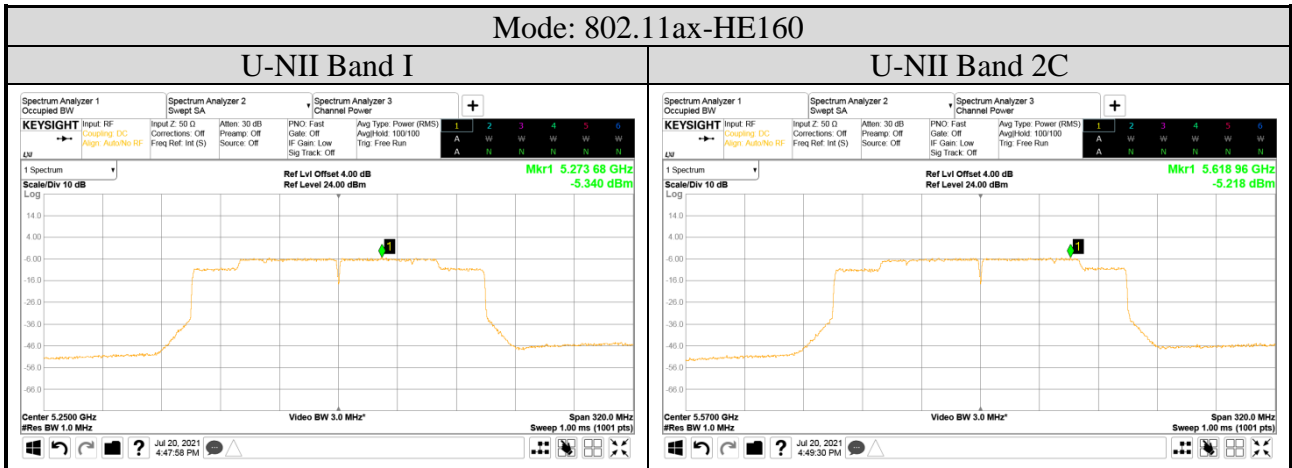

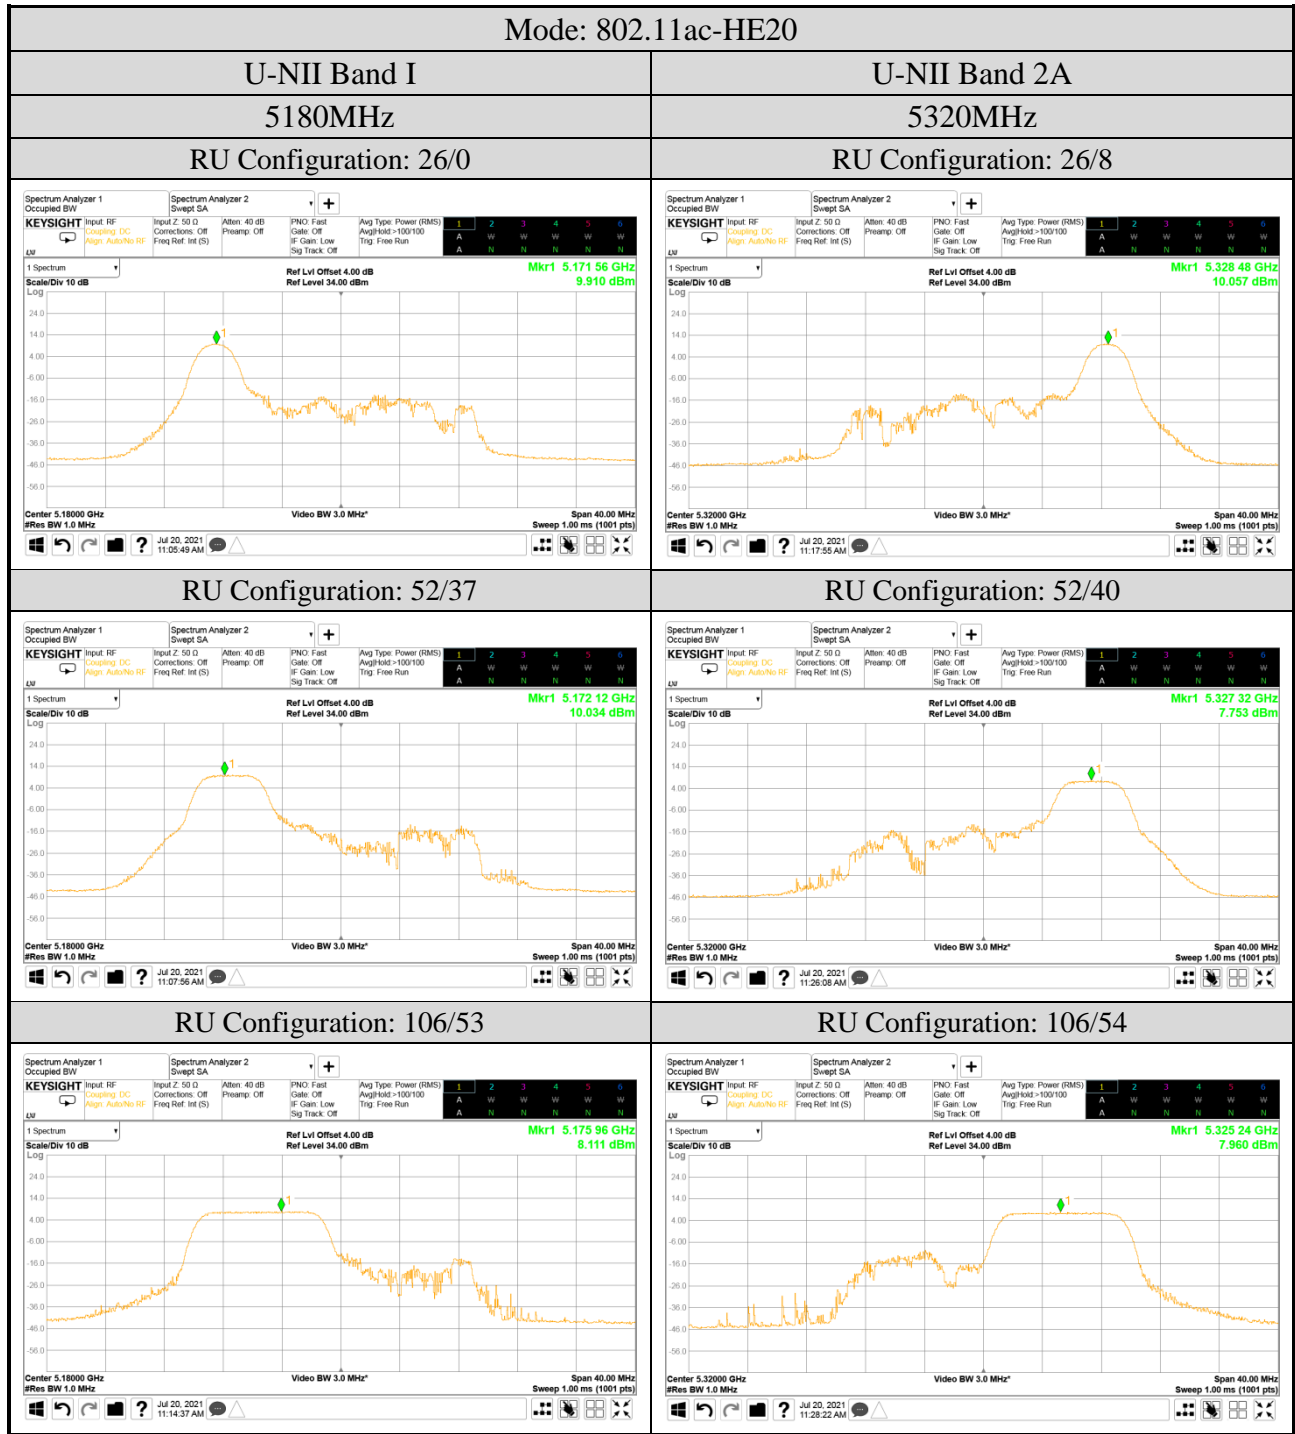


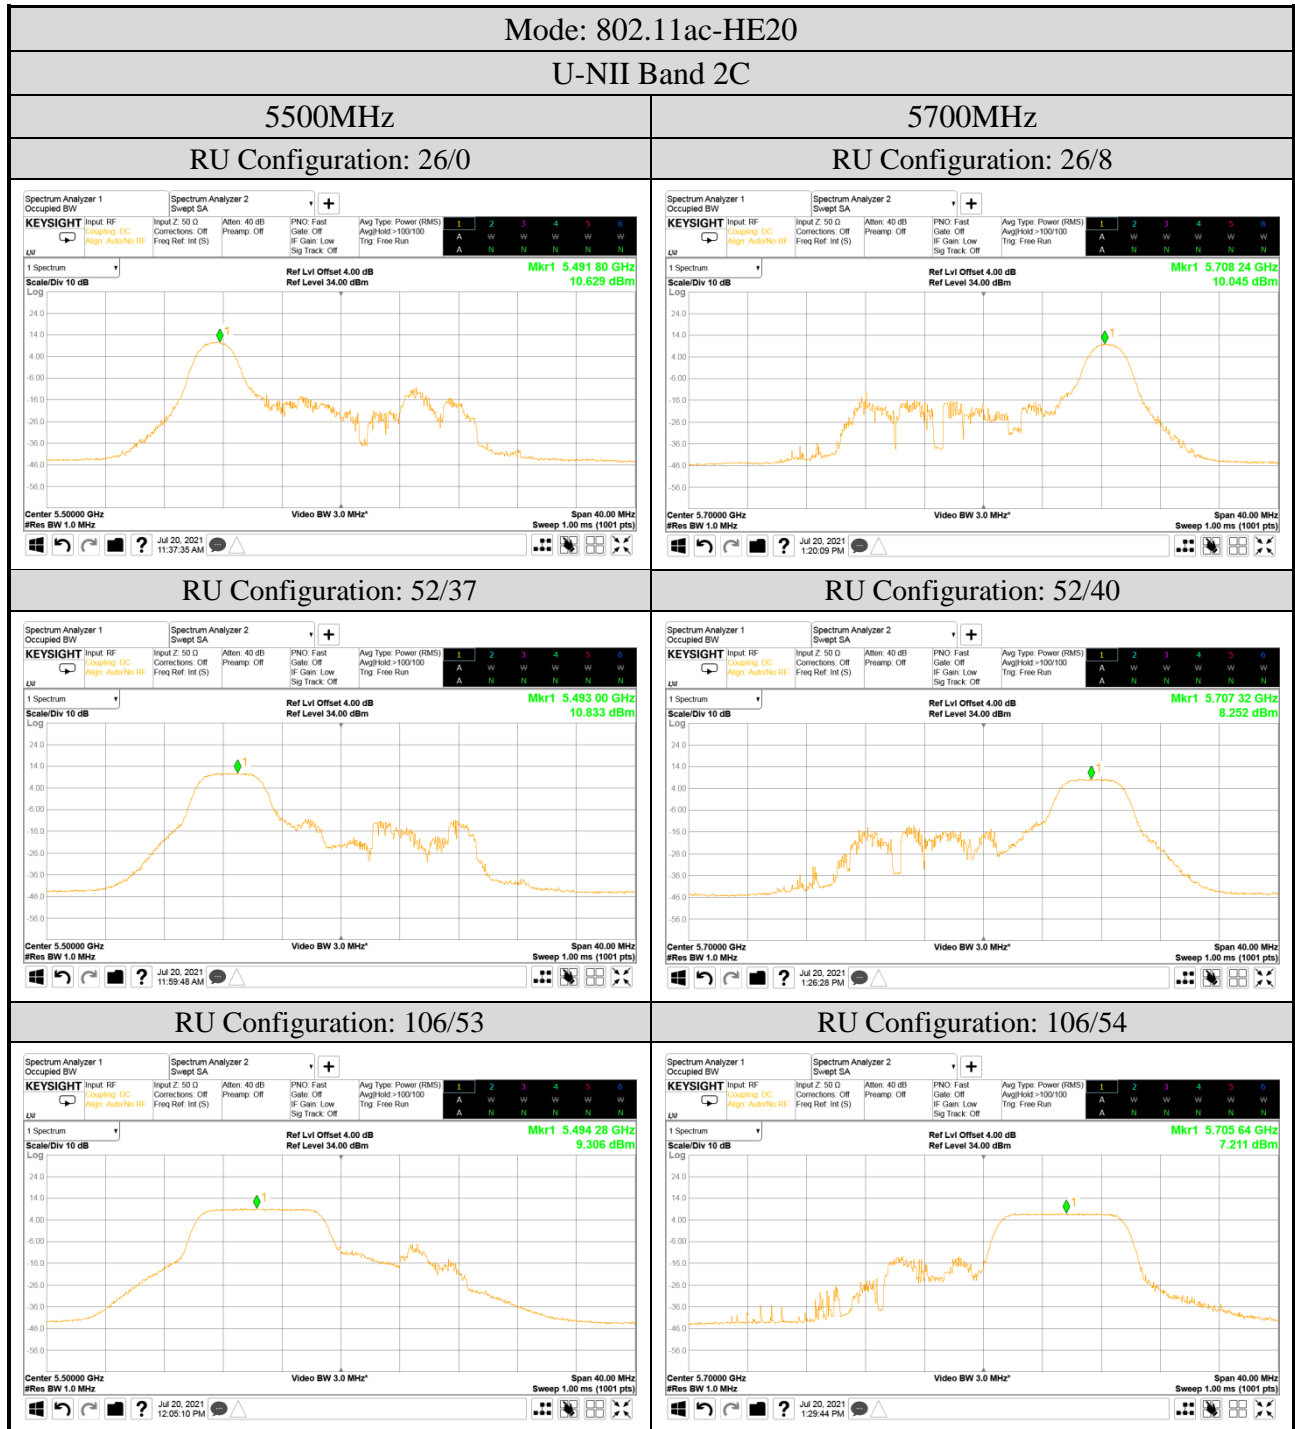

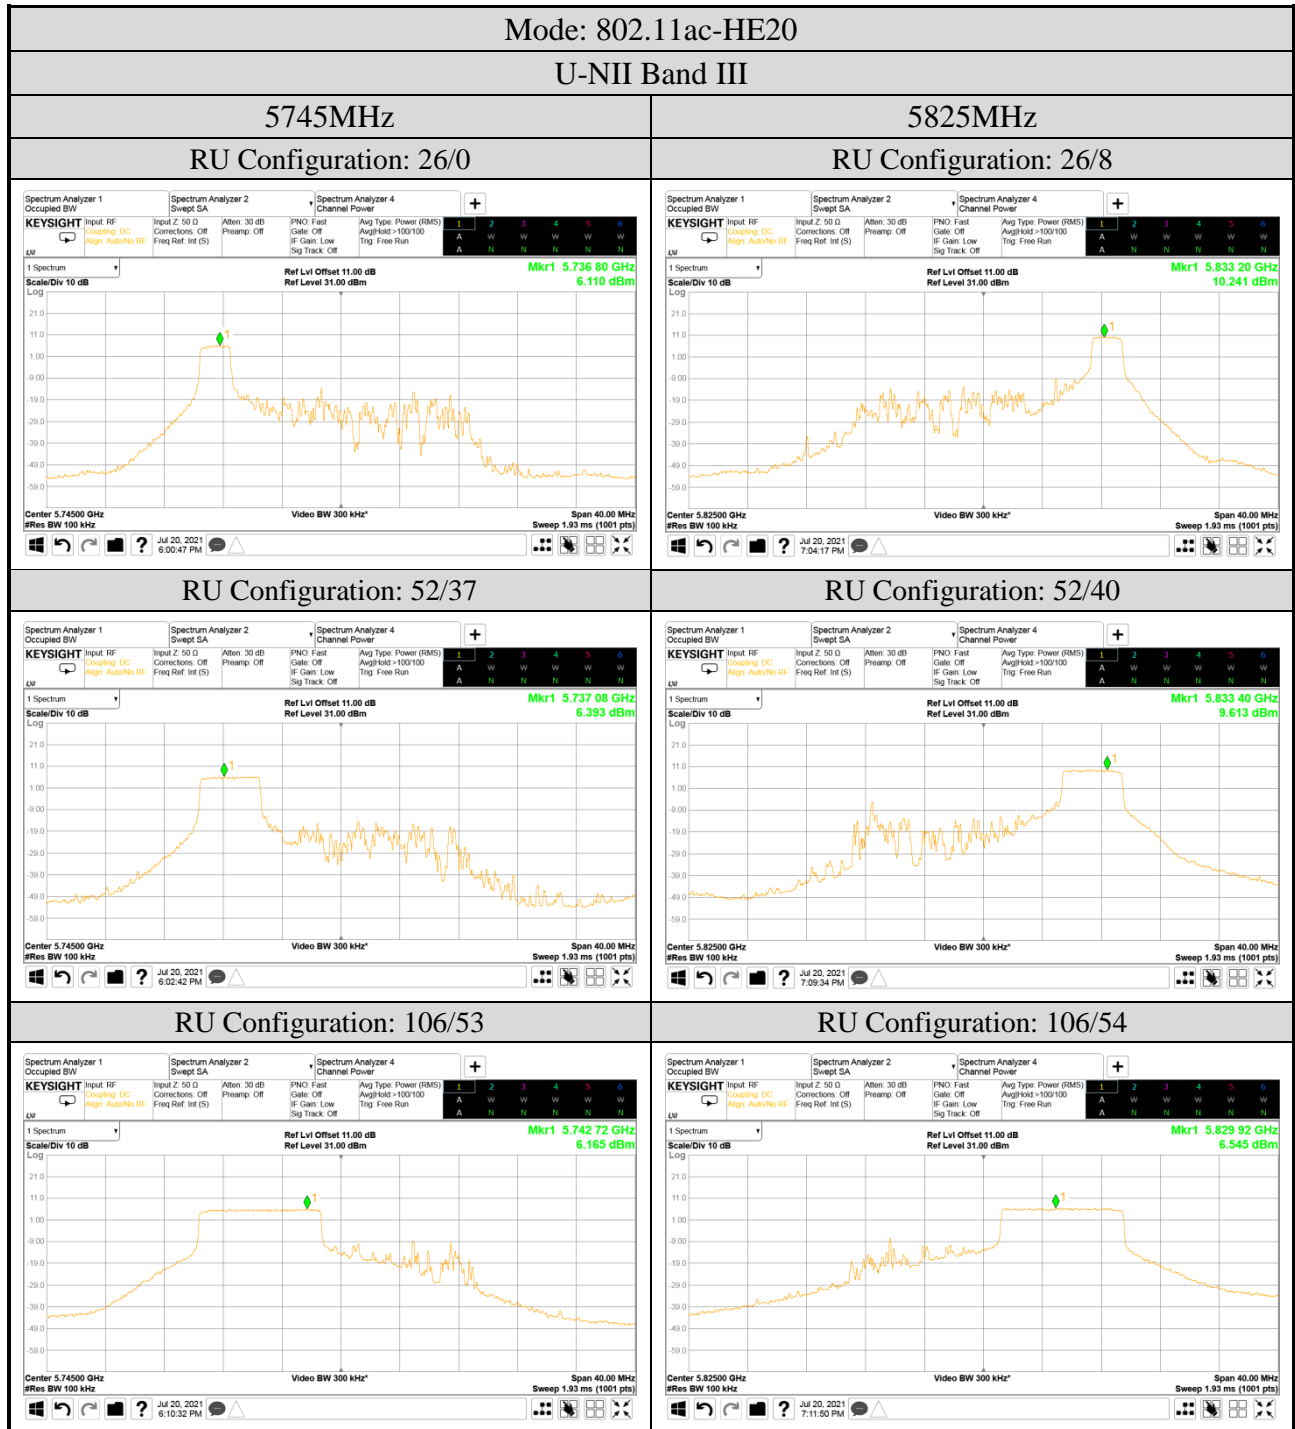


Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

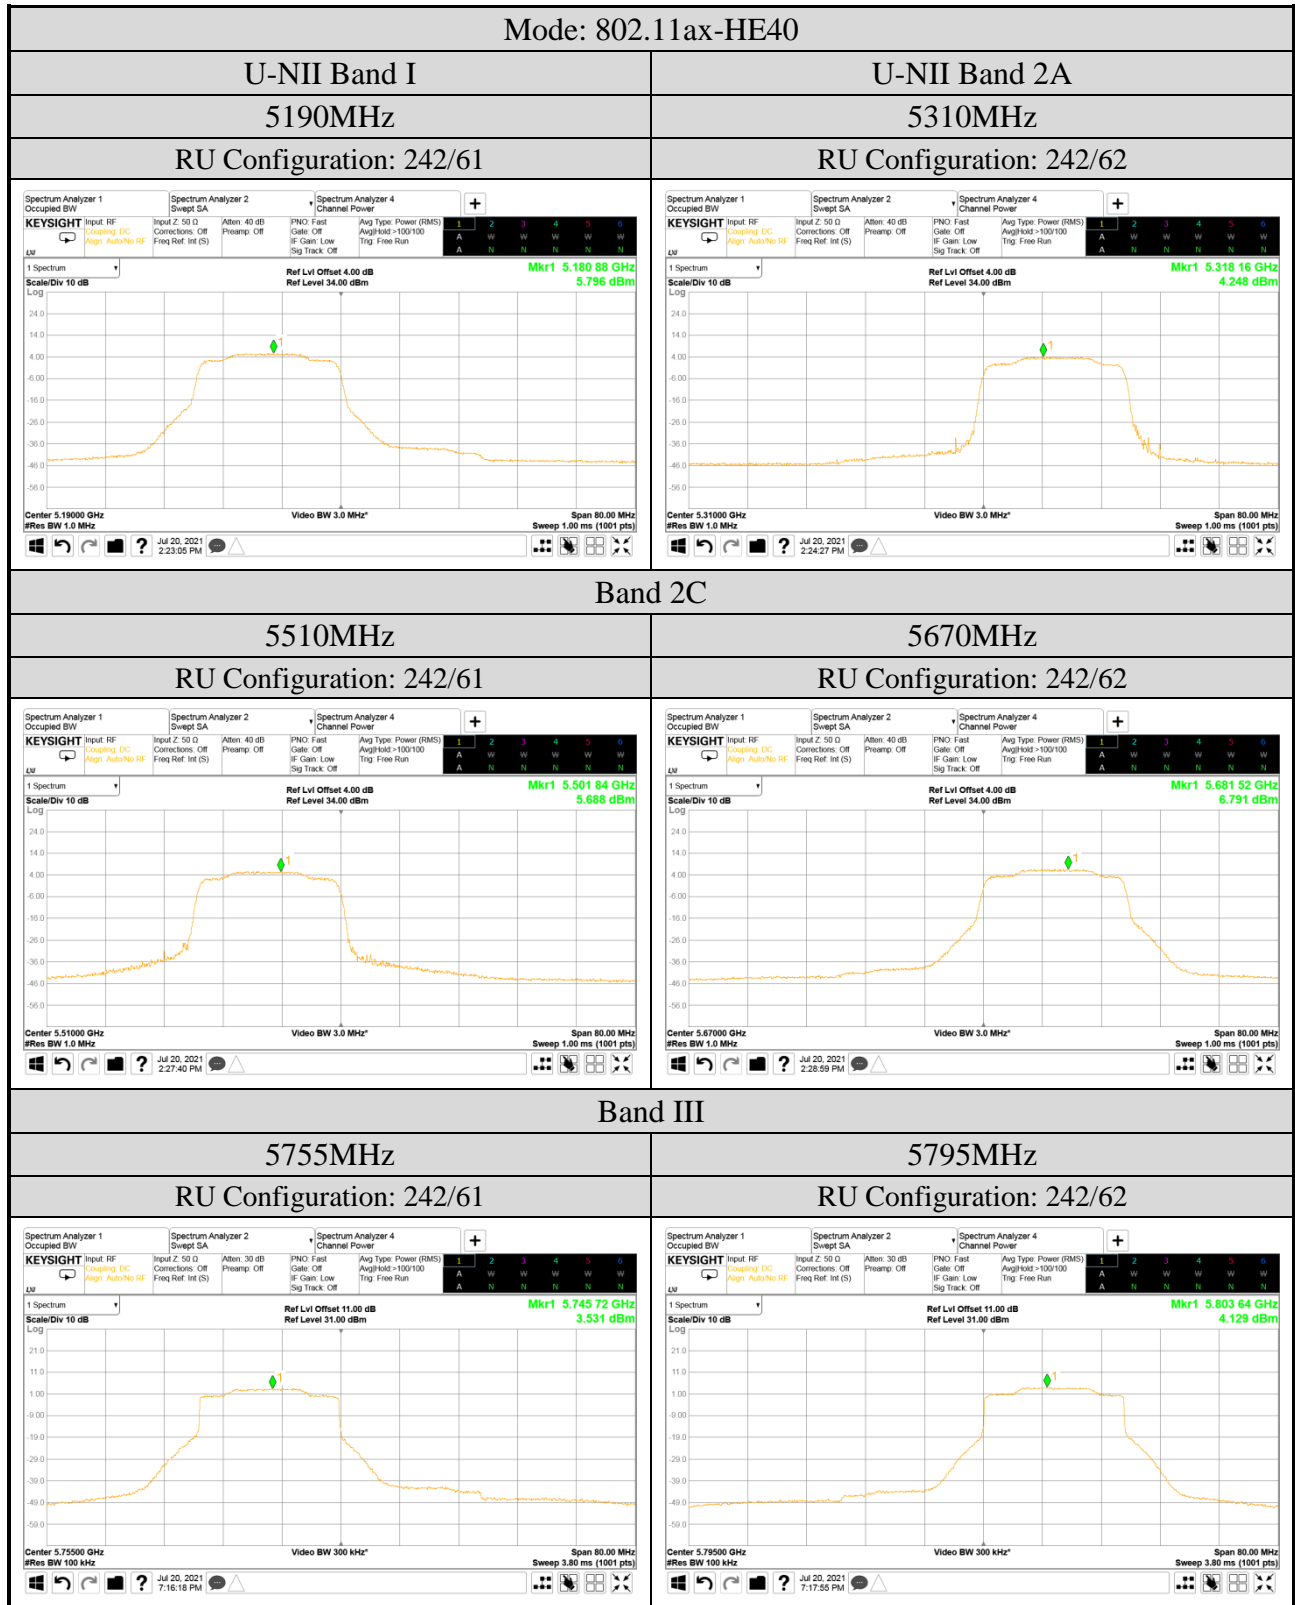

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

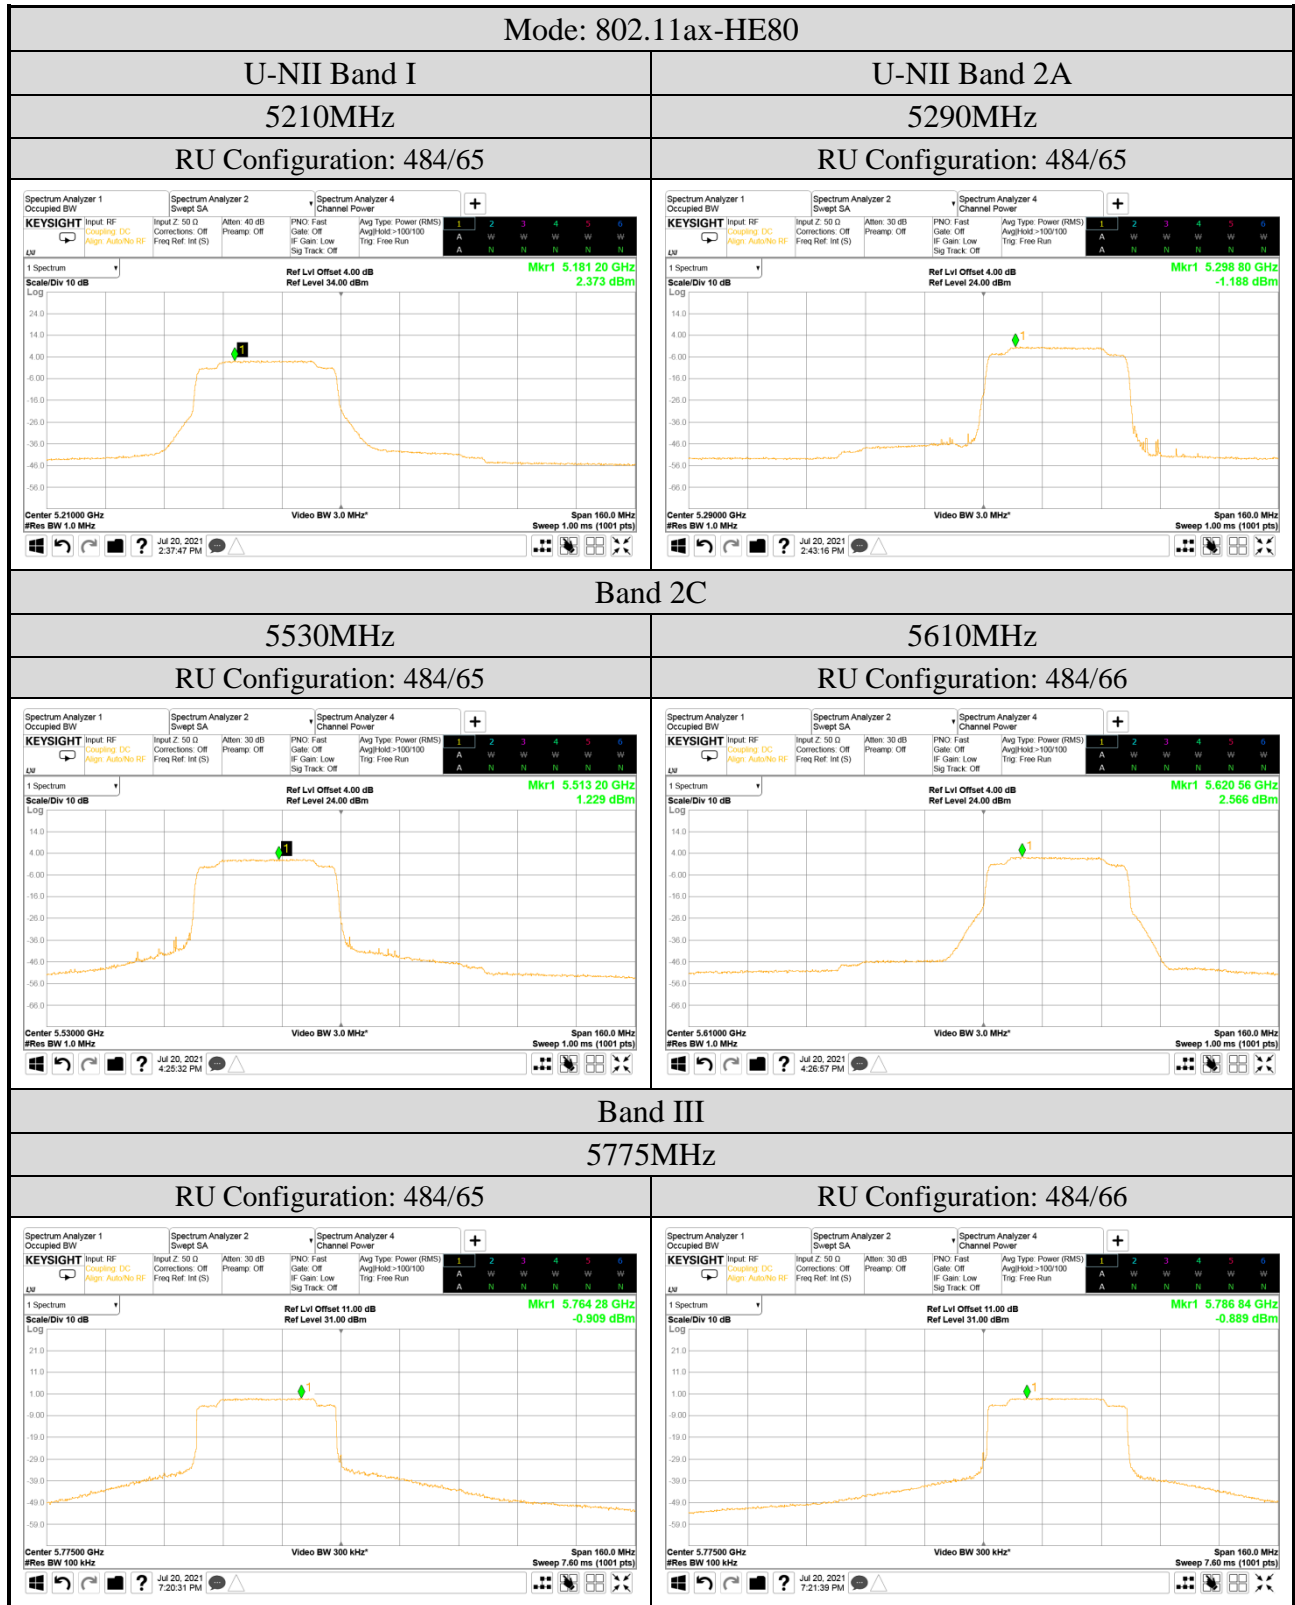

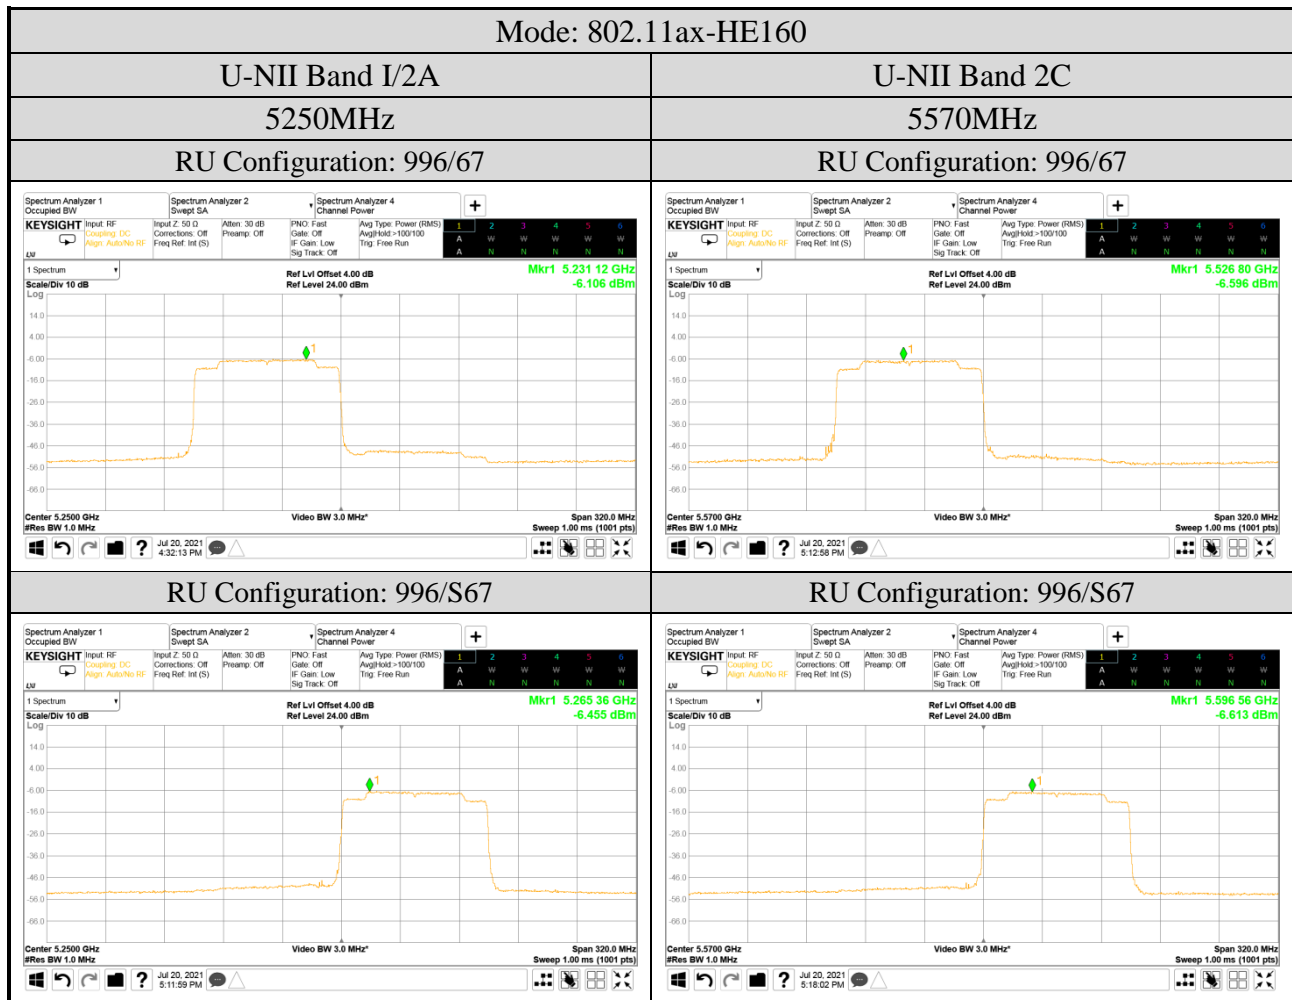

A.6 FREQUENCY STABILITY

Test Date	2021/07/20	Temp./Hum.	24°C/50%
Cable Loss	---	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.6.1 Frequency stability Result

Temperature (°C)	Voltage (Vac)	Centre Frequency (MHz)	Measurement Value (MHz)	Frequency Stability (ppm)
25	120	5180	5180.006	1.158
-30	102		5180.01	1.931
	138		5179.965	-6.757
-20	102		5179.969	-5.985
	138		5179.976	-4.633
-10	102		5179.982	-3.475
	138		5179.985	-2.896
0	102		5179.982	-3.475
	138		5179.992	-1.544
10	102		5179.99	-1.931
	138		5180.002	0.386
20	102		5179.999	-0.193
	138		5180.002	0.386
30	102		5180.006	1.158
	138		5180.01	1.931
40	102		5180.014	2.703
	138		5180.015	2.896
50	102		5180.015	2.896
	138		5180.028	5.405