

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	90
A.2.3 Emissions in Non-restricted Frequency Bands:.....	92
A.3 DTS/OCCUPIED BANDWIDTH	93
A.3.1 DTS/Occupied Bandwidth Result.....	93
A.3.2 Measurement Plots	95
A.4 MAXIMUM PEAK OUTPUT POWER	117
A.4.1 Peak Output Power	117
A.4.2 Average Output Power (Reporting only).....	120
A.4.3 Measurement Plots	123
A.5 EMISSION LIMITATIONS	125
A.6 POWER SPECTRAL DENSITY	151
A.6.1 Power Spectral Density Result	151
A.6.2 Measurement Plots	153

A.1 CONDUCTED EMISSION

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

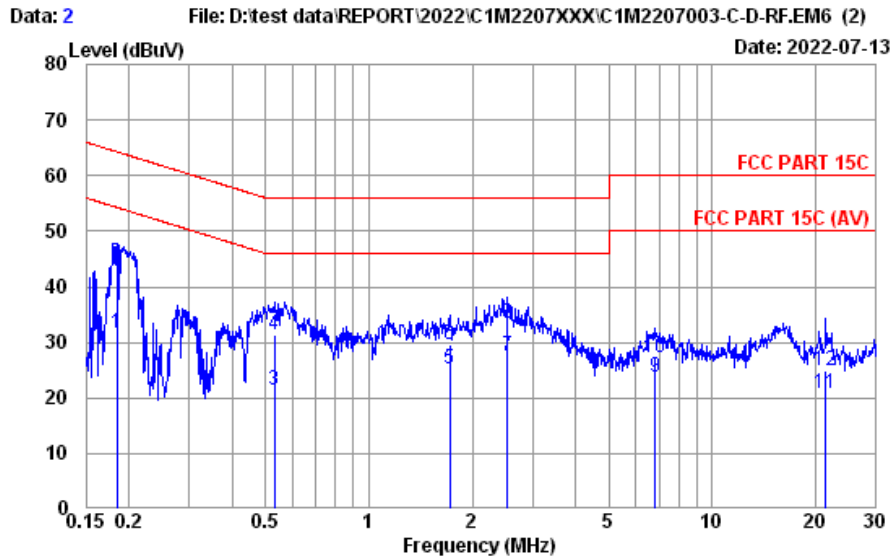


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 16ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.184	10.33	0.03	9.85	11.43	31.64	54.28	22.64	Average
2	0.184	10.33	0.03	9.85	23.90	44.11	64.28	20.17	QP
3	0.529	10.33	0.03	9.85	1.06	21.27	46.00	24.73	Average
4	0.529	10.33	0.03	9.85	11.13	31.34	56.00	24.66	QP
5	1.716	10.36	0.05	9.86	4.87	25.14	46.00	20.86	Average
6	1.716	10.36	0.05	9.86	9.26	29.53	56.00	26.47	QP
7	2.527	10.37	0.07	9.86	7.20	27.50	46.00	18.50	Average
8	2.527	10.37	0.07	9.86	13.15	33.45	56.00	22.55	QP
9	6.805	10.53	0.11	9.87	3.16	23.67	50.00	26.33	Average
10	6.805	10.53	0.11	9.87	6.79	27.30	60.00	32.70	QP
11	21.373	11.10	0.20	9.95	-0.52	20.73	50.00	29.27	Average
12	21.373	11.10	0.20	9.95	3.77	25.02	60.00	34.98	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

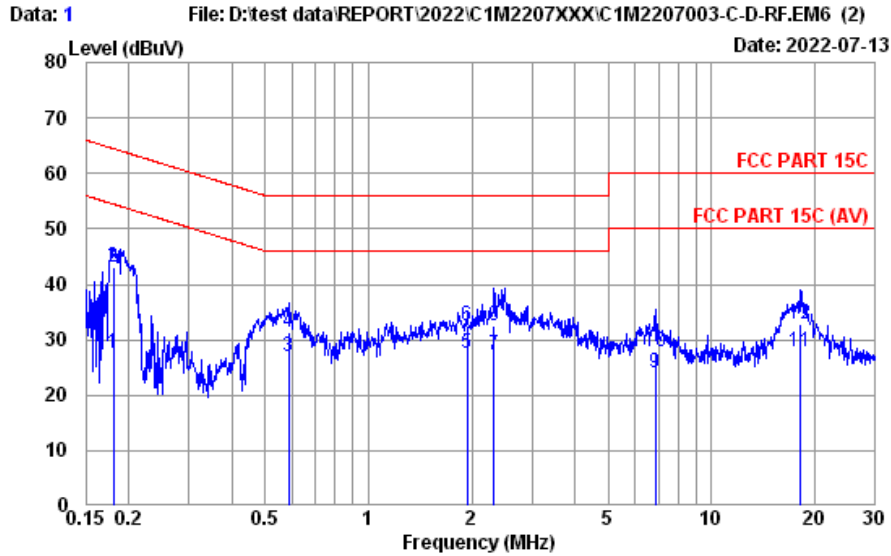

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: LINE
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 16ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.181	10.22	0.03	9.85	7.52	27.62	54.46	26.84	Average
2	0.181	10.22	0.03	9.85	23.09	43.19	64.46	21.27	QP
3	0.585	10.22	0.03	9.85	6.73	26.83	46.00	19.17	Average
4	0.585	10.22	0.03	9.85	11.16	31.26	56.00	24.74	QP
5	1.939	10.25	0.06	9.86	7.31	27.48	46.00	18.52	Average
6	1.939	10.25	0.06	9.86	12.30	32.47	56.00	23.53	QP
7	2.321	10.26	0.07	9.86	7.06	27.25	46.00	18.75	Average
8	2.321	10.26	0.07	9.86	12.29	32.48	56.00	23.52	QP
9	6.841	10.36	0.11	9.87	3.65	23.99	50.00	26.01	Average
10	6.841	10.36	0.11	9.87	7.47	27.81	60.00	32.19	QP
11	18.039	10.61	0.18	9.93	7.13	27.85	50.00	22.15	Average
12	18.039	10.61	0.18	9.93	12.18	32.90	60.00	27.10	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/07/04~13	Temp./Hum.	23~24°C/59~65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
110.510	17.33	2.74	26.21	34.09	27.95	43.50	15.55	Peak
213.330	15.97	3.86	25.76	41.95	36.02	43.50	7.48	Peak
431.580	21.97	6.21	26.68	32.15	33.65	46.00	12.35	Peak
540.220	23.61	6.90	27.24	30.69	33.96	46.00	12.04	Peak
810.850	25.98	8.27	27.25	28.48	35.48	46.00	10.52	Peak
987.390	27.02	9.22	26.69	27.57	37.12	54.00	16.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	39.83	37.35	40.00	2.65	Peak
194.900	15.07	3.66	25.80	42.97	35.90	43.50	7.60	Peak
399.570	21.37	5.91	26.41	32.80	33.67	46.00	12.33	Peak
540.220	23.61	6.90	27.24	30.60	33.87	46.00	12.13	Peak
927.250	26.52	8.90	26.90	29.36	37.88	46.00	8.12	Peak
970.900	26.91	9.15	26.75	27.97	37.28	54.00	16.72	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.65	1.41	26.49	28.93	27.50	40.00	12.50	Peak
215.270	16.12	3.88	25.76	42.46	36.70	43.50	6.80	Peak
431.580	21.97	6.21	26.68	32.55	34.05	46.00	11.95	Peak
540.220	23.61	6.90	27.24	32.07	35.34	46.00	10.66	Peak
919.490	26.47	8.87	26.93	28.39	36.80	46.00	9.20	Peak
981.570	26.99	9.20	26.72	28.55	38.02	54.00	15.98	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	21.22	1.55	26.48	40.84	37.13	40.00	2.87	Peak
194.900	15.07	3.66	25.80	43.69	36.62	43.50	6.88	Peak
405.390	21.51	5.98	26.47	32.95	33.97	46.00	12.03	Peak
540.220	23.61	6.90	27.24	30.82	34.09	46.00	11.91	Peak
914.640	26.44	8.85	26.93	28.76	37.12	46.00	8.88	Peak
986.420	27.02	9.22	26.69	28.02	37.57	54.00	16.43	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

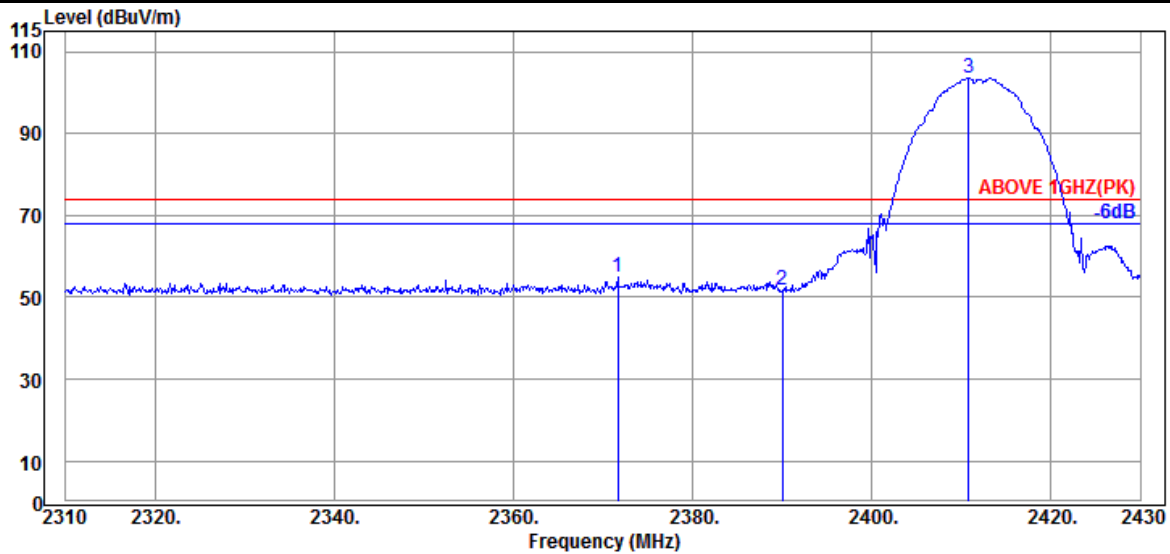

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.680	28.20	5.70	39.93	61.08	55.05	74.00	18.95	Peak
2390.040	28.20	5.72	39.93	57.76	51.75	74.00	22.25	Peak
@ 2410.800	28.23	5.75	39.93	109.47	103.52	---	---	Peak

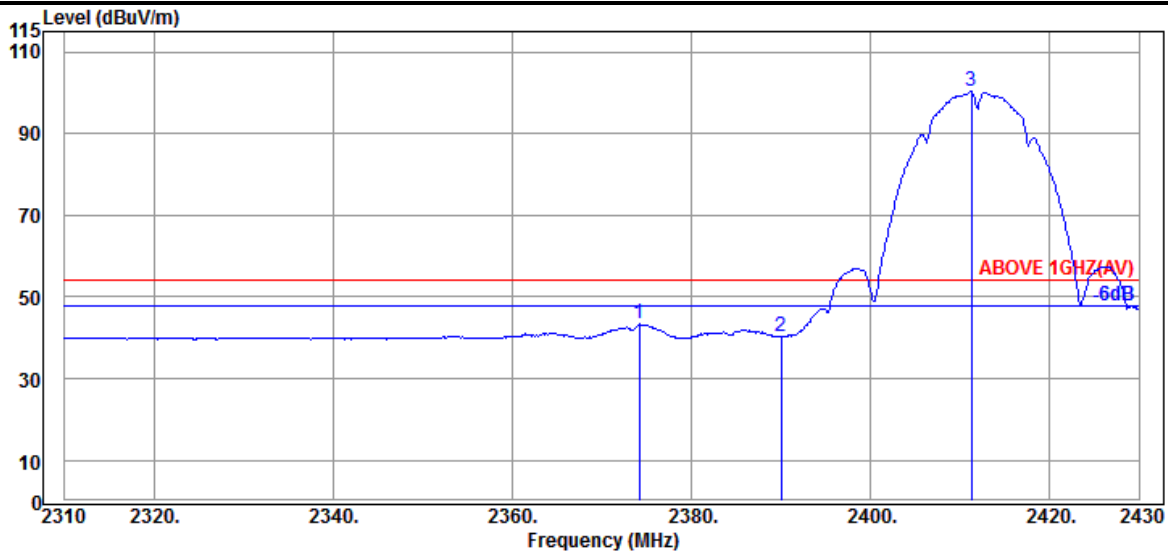


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.200	28.20	5.70	39.93	49.33	43.30	54.00	10.70	Average
2390.040	28.20	5.72	39.93	46.18	40.17	54.00	13.83	Average
@ 2411.280	28.26	5.76	39.93	106.21	100.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

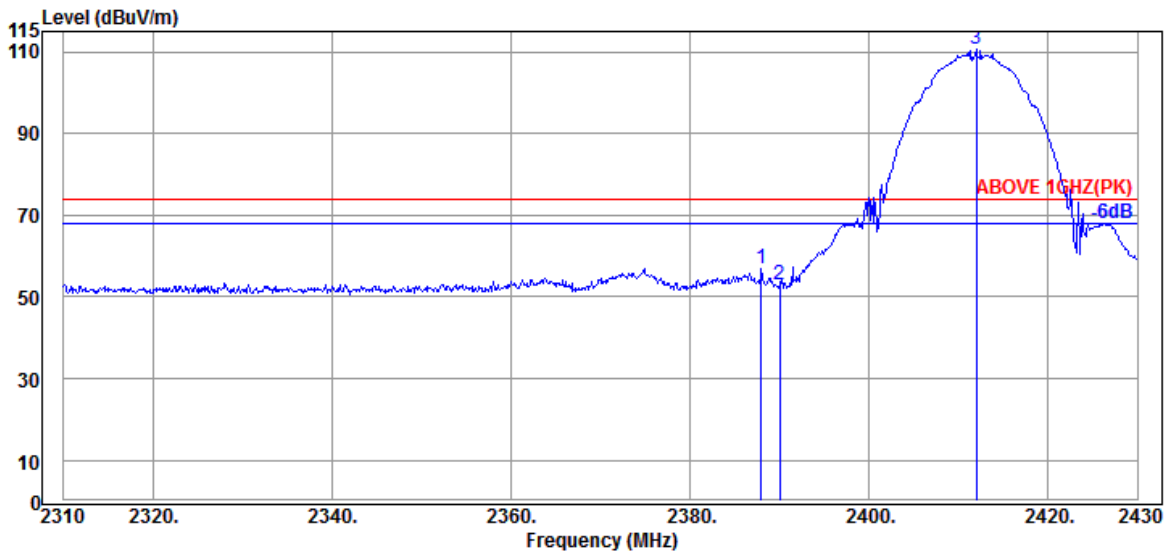

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.72	39.93	62.96	56.95	74.00	17.05	Peak
2390.040	28.20	5.72	39.93	58.82	52.81	74.00	21.19	Peak
@ 2412.000	28.26	5.76	39.93	116.42	110.51	---	---	Peak

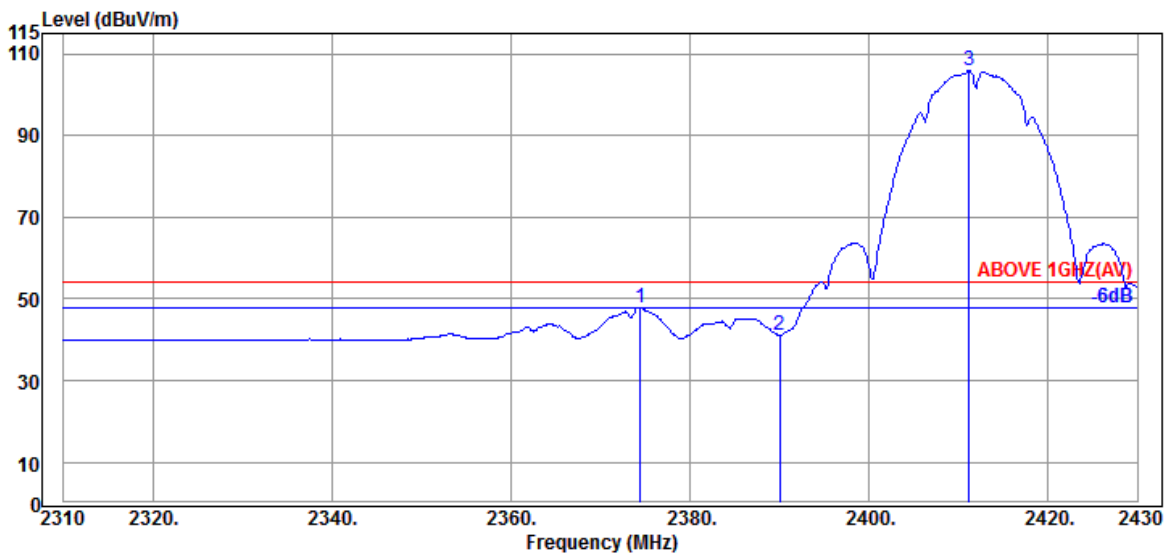


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	28.20	5.70	39.93	53.96	47.93	54.00	6.07	Average
2390.040	28.20	5.72	39.93	47.18	41.17	54.00	12.83	Average
@ 2411.60	28.23	5.75	39.93	111.79	105.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

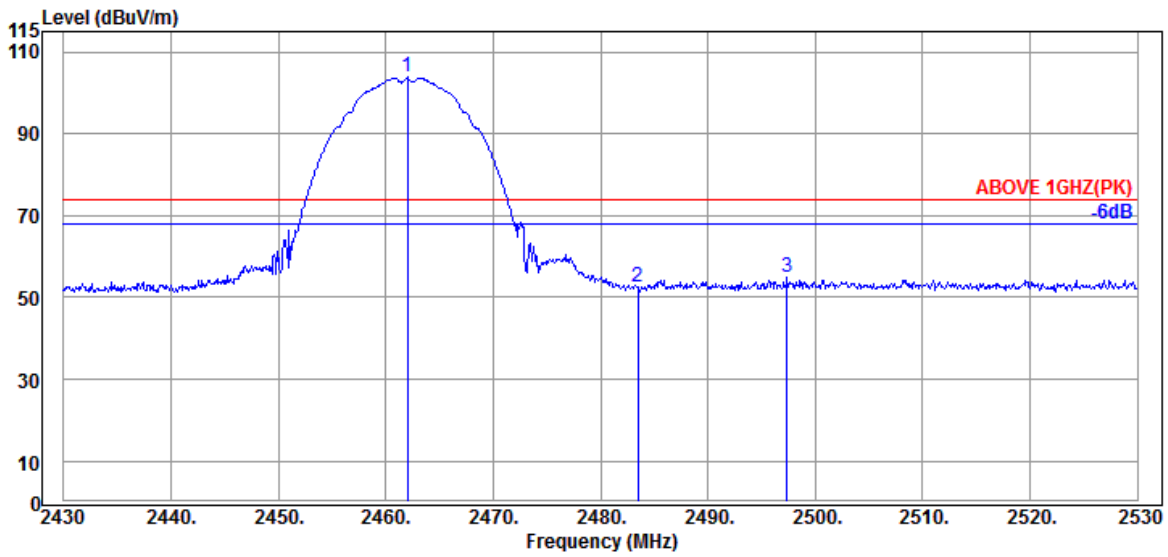

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.43	5.84	39.92	109.70	104.05	---	---	Peak
2483.500	28.47	5.87	39.92	57.95	52.37	74.00	21.63	Peak
2497.400	28.50	5.89	39.92	60.37	54.84	74.00	19.16	Peak

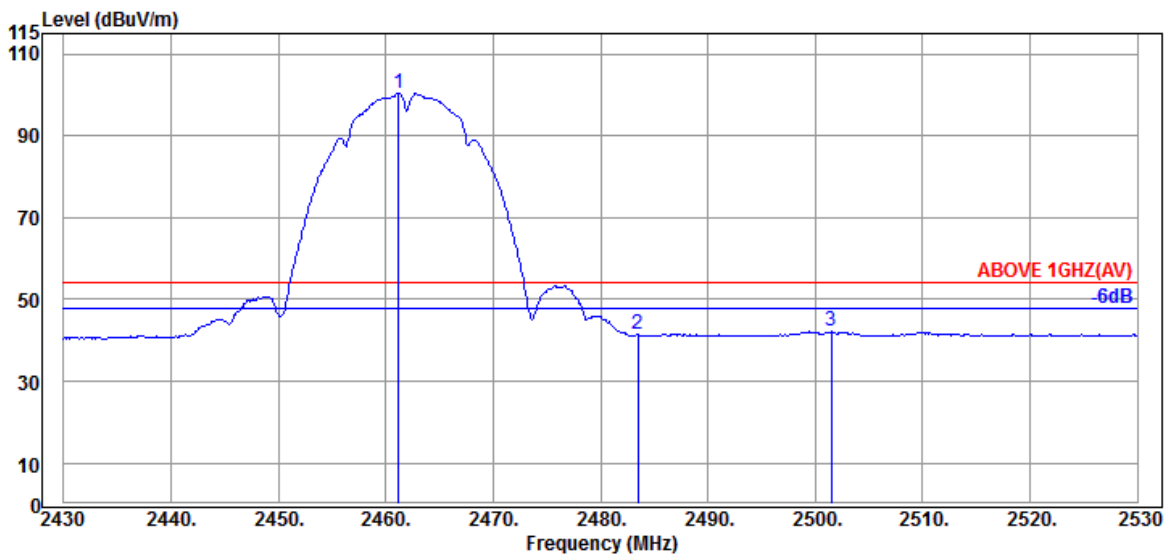


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.43	5.84	39.92	105.97	100.32	---	---	Average
2483.500	28.47	5.87	39.92	46.92	41.34	54.00	12.66	Average
2501.500	28.50	5.89	39.92	47.68	42.15	54.00	11.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

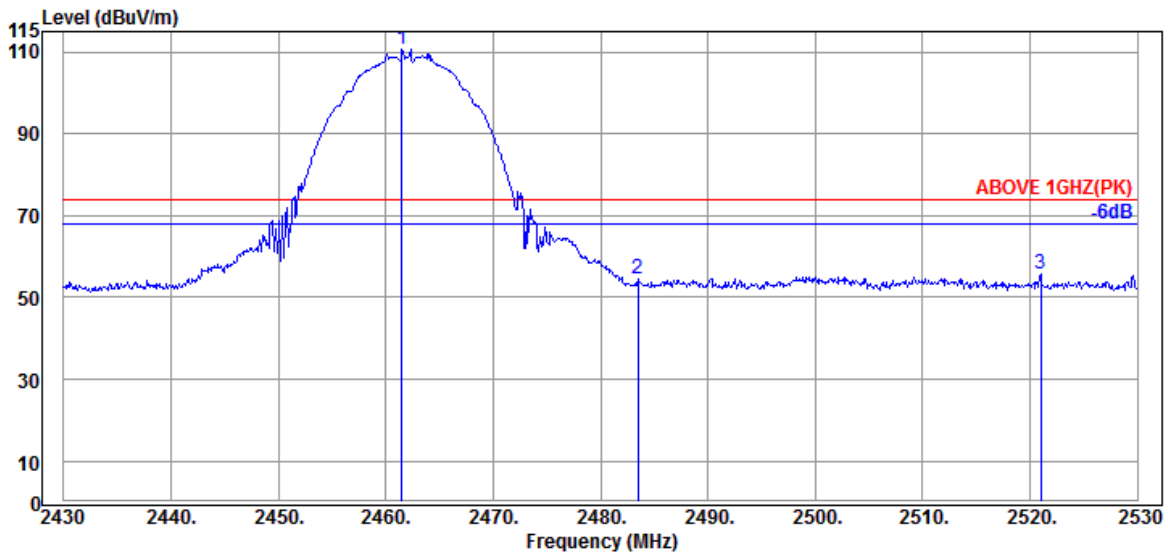

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	28.43	5.84	39.92	116.21	110.56	---	---	Peak
2483.500	28.47	5.87	39.92	59.96	54.38	74.00	19.62	Peak
2521.000	28.59	5.94	39.93	61.16	55.76	74.00	18.24	Peak

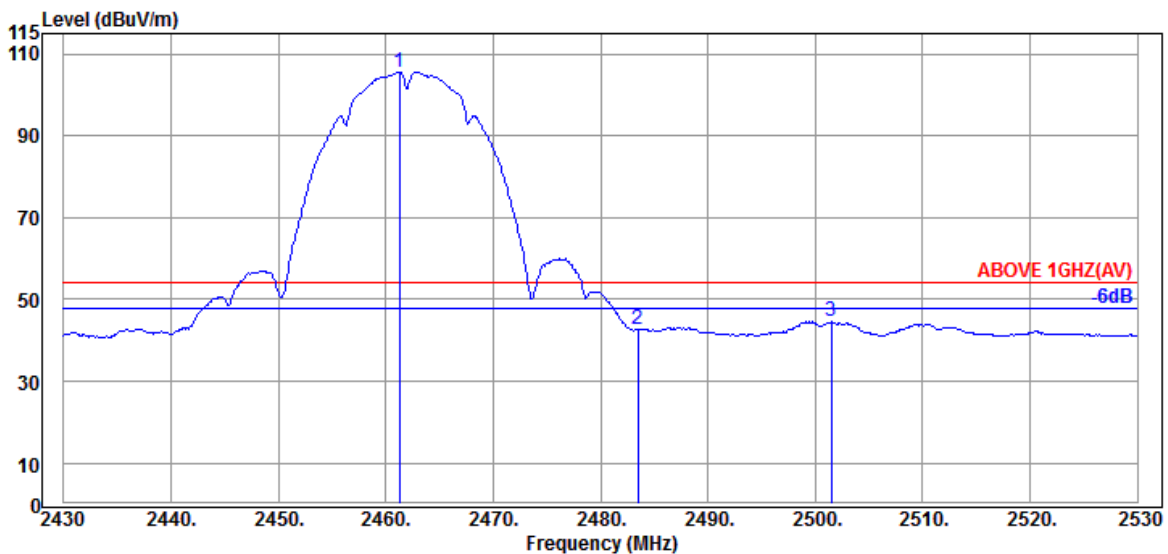


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.43	5.84	39.92	111.35	105.70	---	---	Average
2483.500	28.47	5.87	39.92	48.20	42.62	54.00	11.38	Average
2501.500	28.50	5.89	39.92	50.12	44.59	54.00	9.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

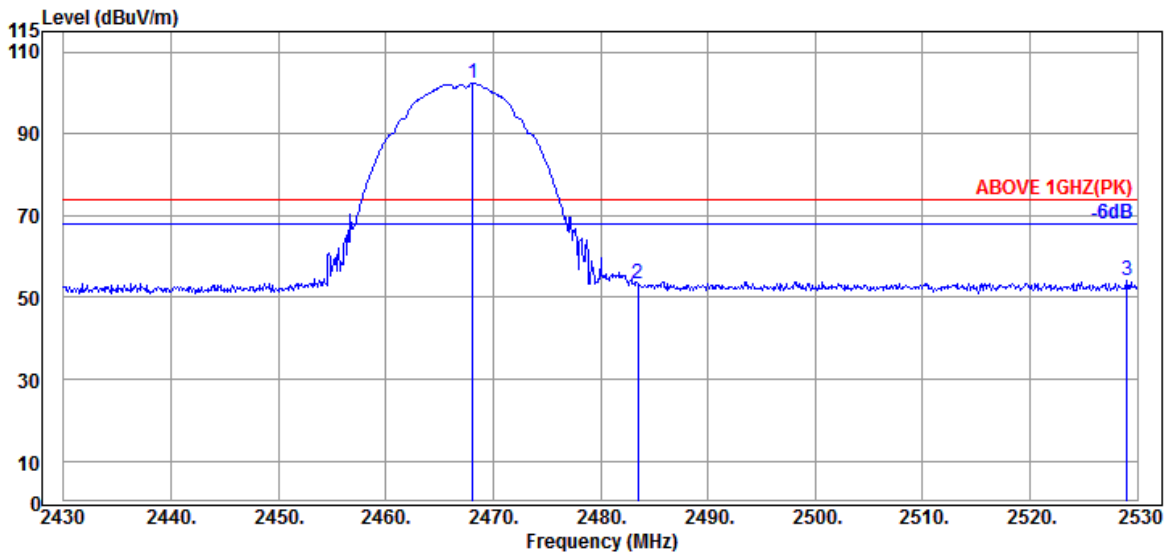

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	5.85	39.92	107.92	102.29	---	---	Peak
2483.500	28.47	5.87	39.92	58.97	53.39	74.00	20.61	Peak
2529.000	28.61	5.96	39.93	59.35	53.99	74.00	20.01	Peak

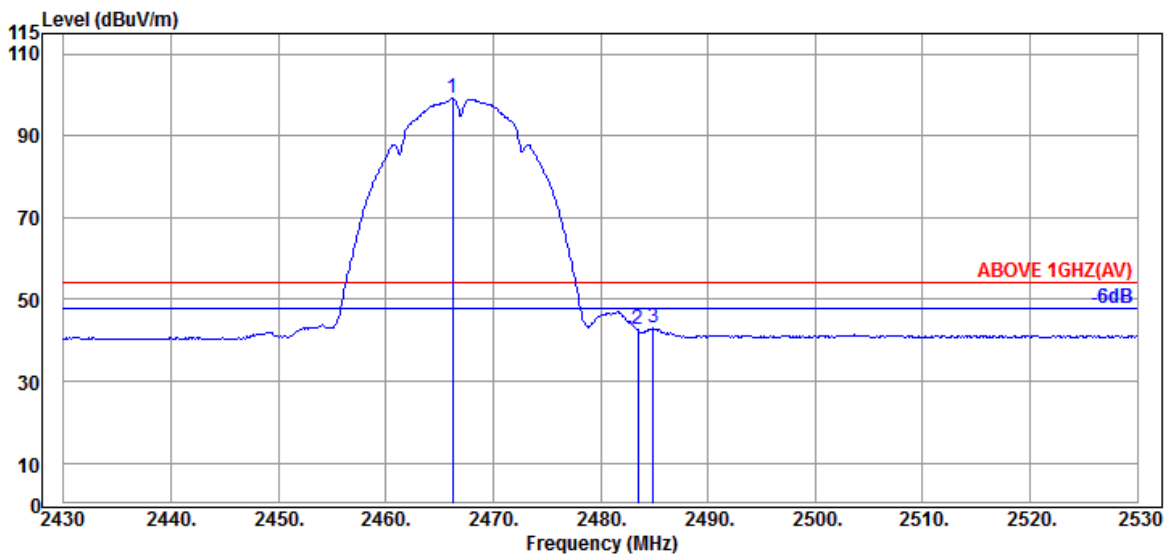


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	5.84	39.92	104.73	99.08	---	---	Average
2483.500	28.47	5.87	39.92	48.10	42.52	54.00	11.48	Average
2484.900	28.47	5.87	39.92	48.54	42.96	54.00	11.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

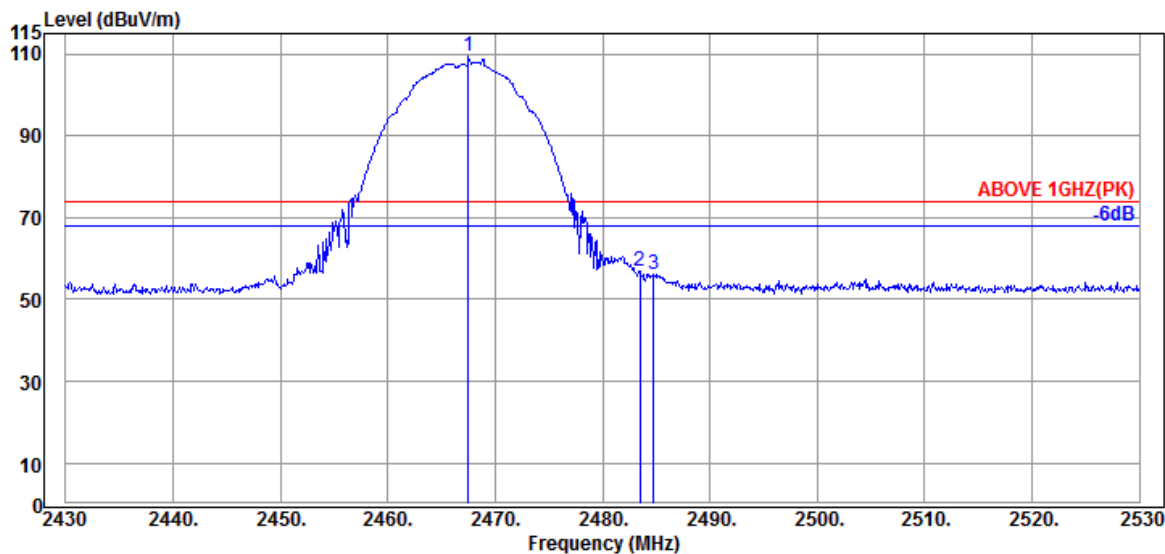

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.43	5.84	39.92	115.21	109.56	---	---	Peak
2483.500	28.47	5.87	39.92	62.41	56.83	74.00	17.17	Peak
2484.800	28.47	5.87	39.92	61.70	56.12	74.00	17.88	Peak

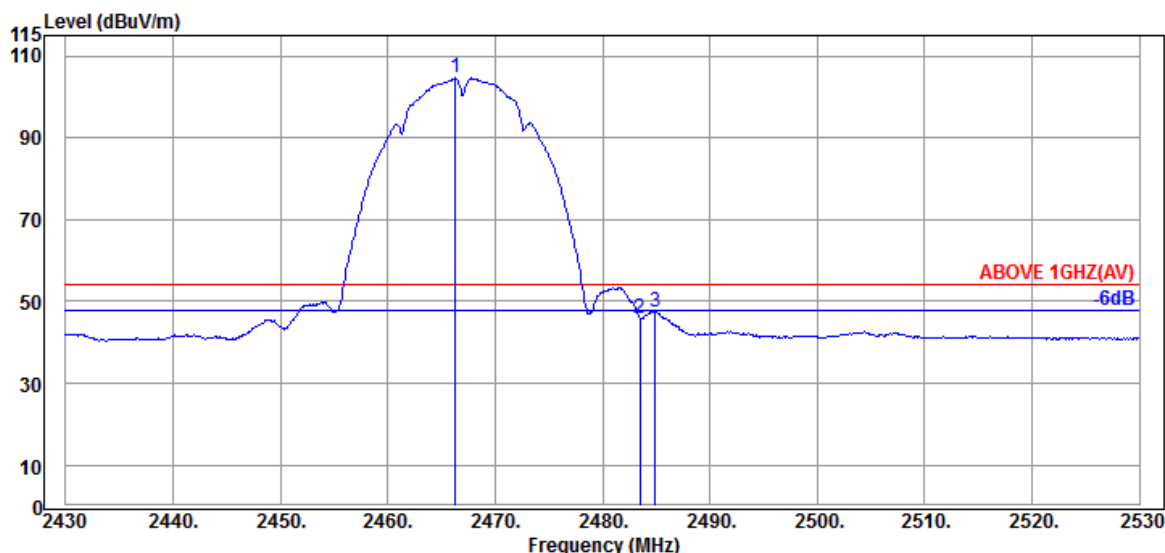


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	5.84	39.92	110.24	104.59	---	---	Average
2483.500	28.47	5.87	39.92	51.49	45.91	54.00	8.09	Average
2484.900	28.47	5.87	39.92	53.16	47.58	54.00	6.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

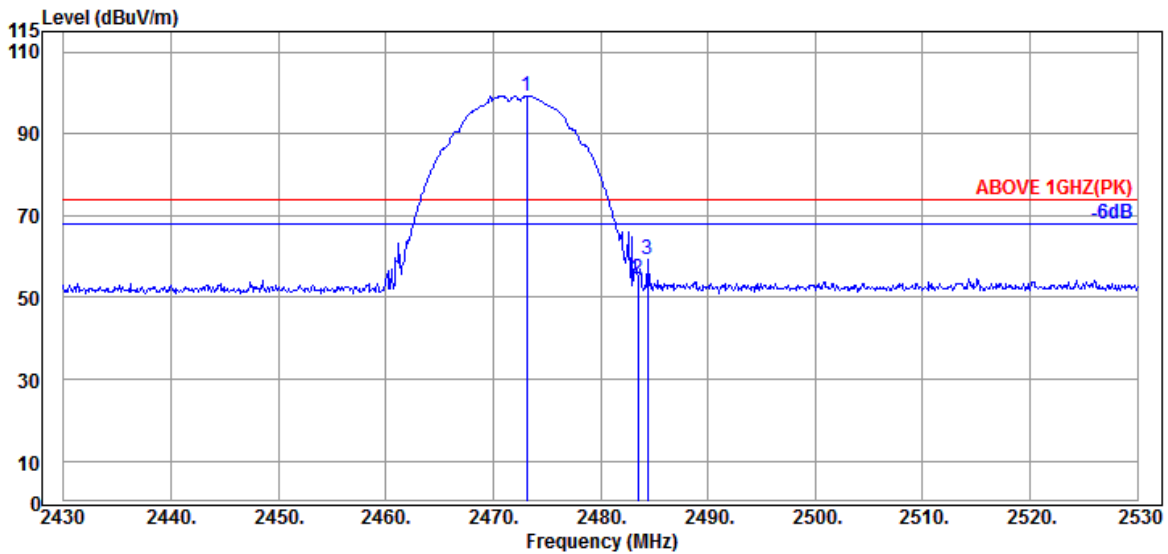

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.100	28.44	5.85	39.92	104.92	99.29	---	---	Peak
2483.500	28.47	5.87	39.92	59.94	54.36	74.00	19.64	Peak
2484.400	28.47	5.87	39.92	64.68	59.10	74.00	14.90	Peak

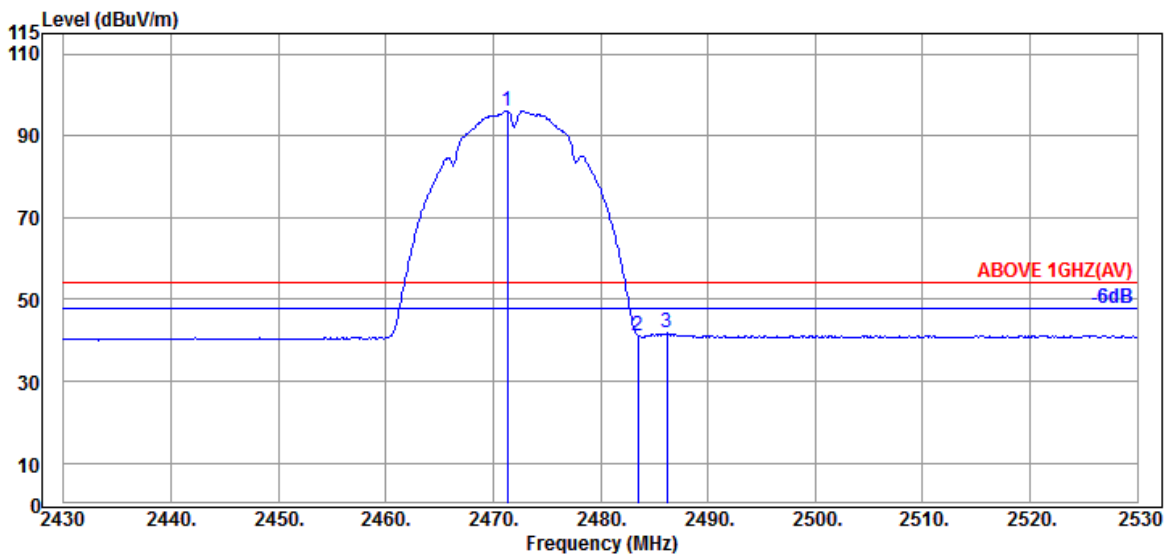


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	5.85	39.92	101.70	96.07	---	---	Average
2483.500	28.47	5.87	39.92	46.81	41.23	54.00	12.77	Average
2486.200	28.47	5.87	39.92	47.39	41.81	54.00	12.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

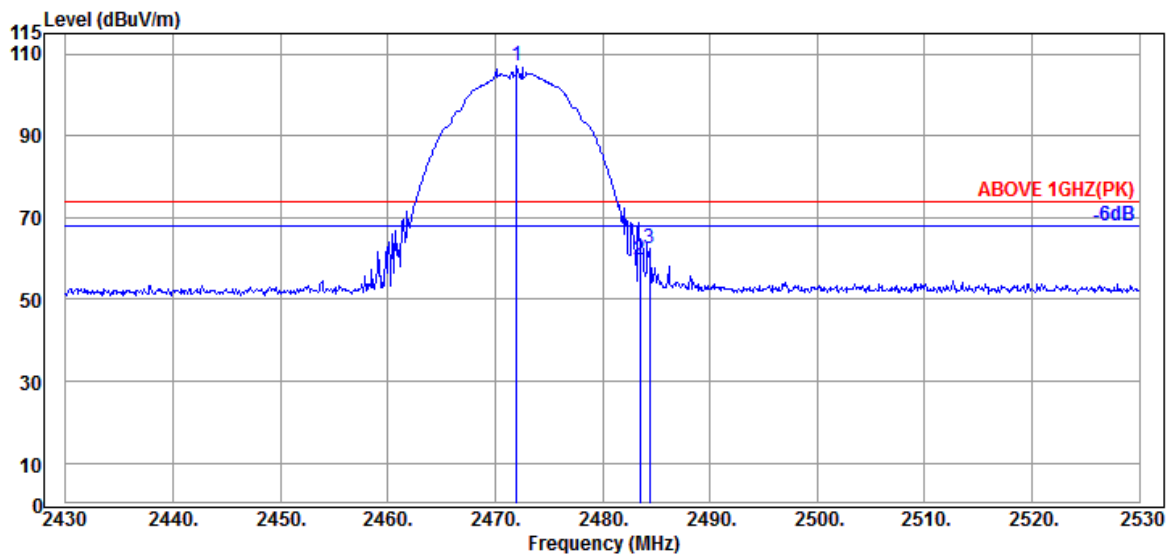

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.92	112.61	106.98	---	---	Peak
2483.500	28.47	5.87	39.92	65.36	59.78	74.00	14.22	Peak
2484.400	28.47	5.87	39.92	68.00	62.42	74.00	11.58	Peak

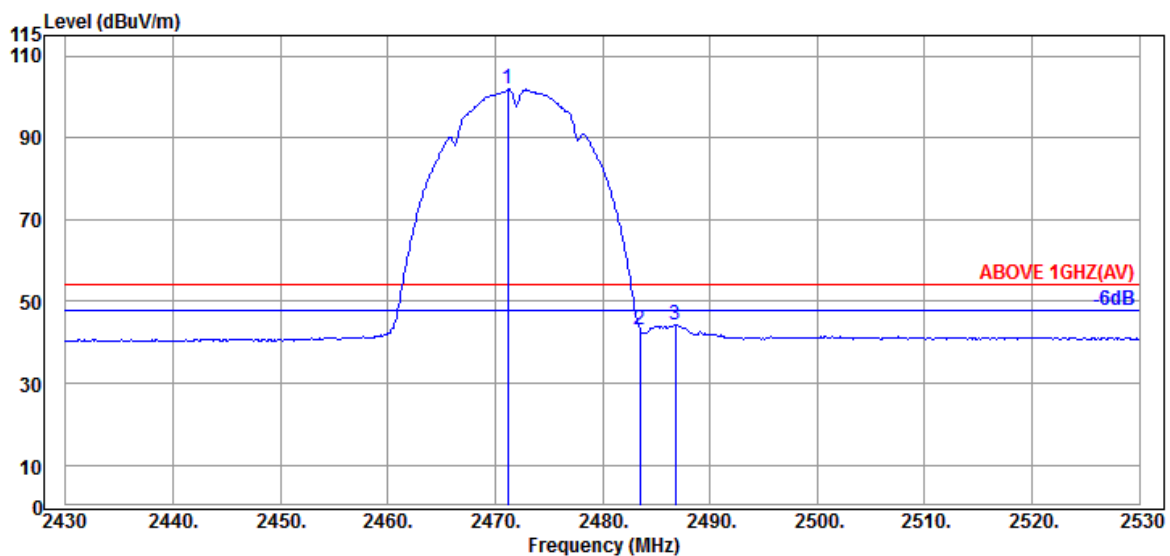


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	5.85	39.92	107.47	101.84	---	---	Average
2483.500	28.47	5.87	39.92	48.71	43.13	54.00	10.87	Average
2486.800	28.47	5.87	39.92	49.77	44.19	54.00	9.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

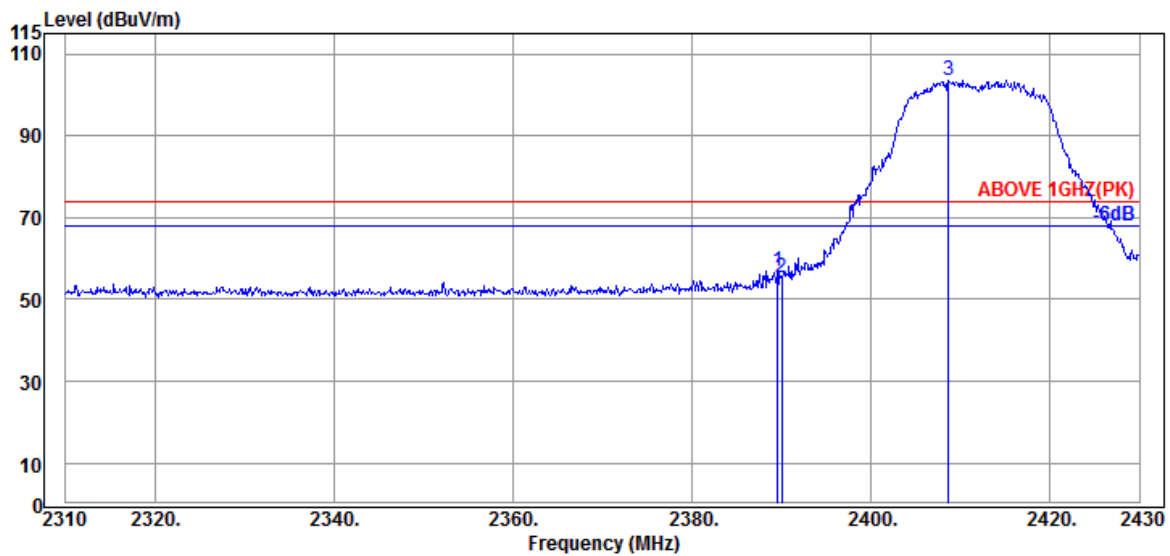

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.93	62.89	56.88	74.00	17.12	Peak
2390.040	28.20	5.72	39.93	61.30	55.29	74.00	18.71	Peak
@ 2408.640	28.23	5.75	39.93	109.47	103.52	---	---	Peak

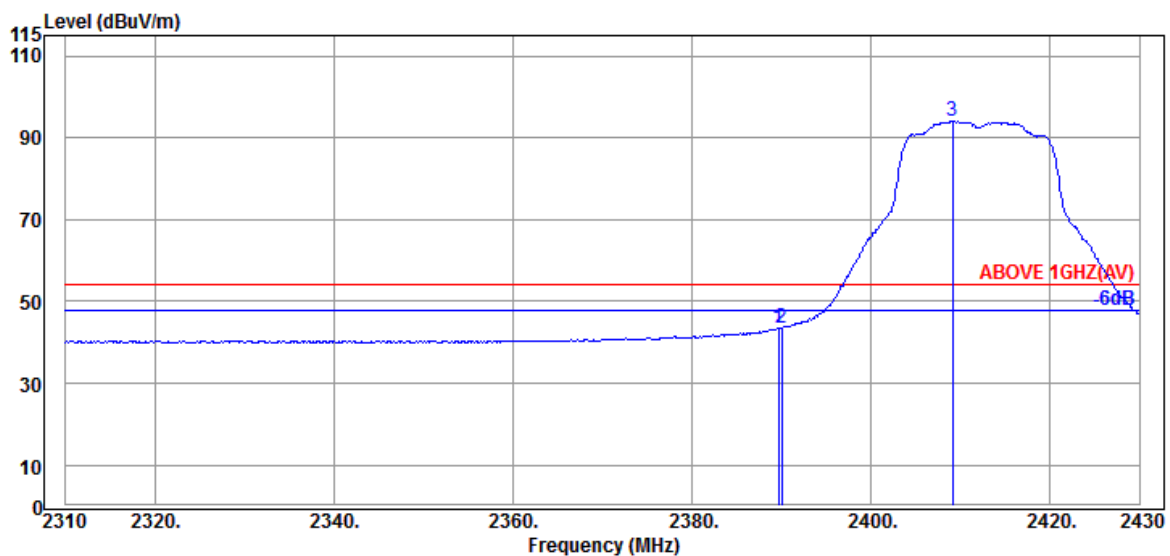


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	49.38	43.37	54.00	10.63	Average
2390.040	28.20	5.72	39.93	49.41	43.40	54.00	10.60	Average
@ 2409.120	28.23	5.75	39.93	99.98	94.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

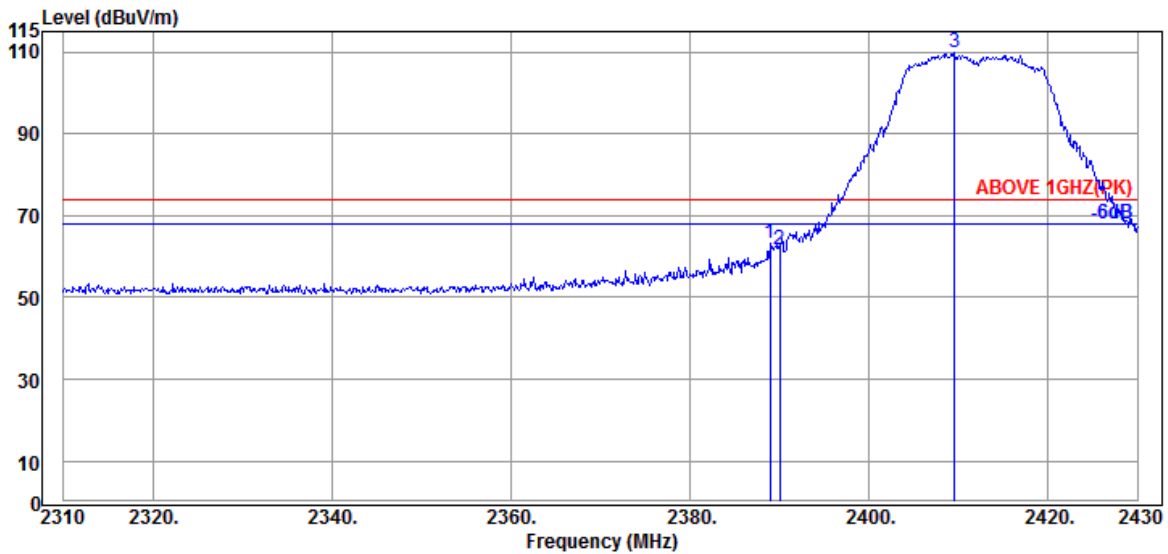

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.20	5.72	39.93	69.40	63.39	74.00	10.61	Peak
2390.040	28.20	5.72	39.93	67.75	61.74	74.00	12.26	Peak
@ 2409.600	28.23	5.75	39.93	115.68	109.73	---	---	Peak

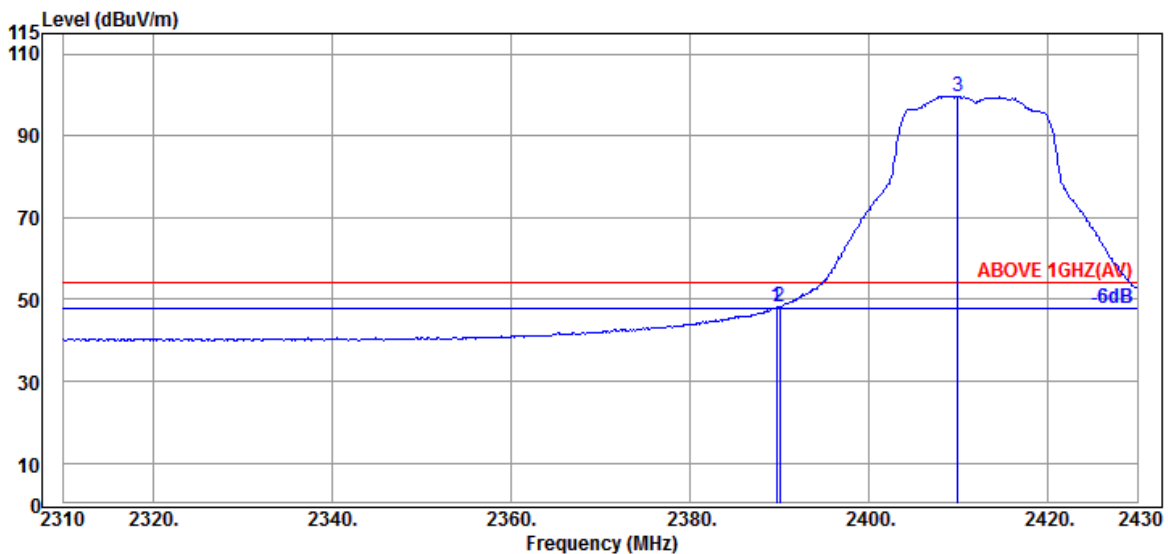


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	54.06	48.05	54.00	5.95	Average
2390.040	28.20	5.72	39.93	54.24	48.23	54.00	5.77	Average
@ 2409.960	28.23	5.75	39.93	105.62	99.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

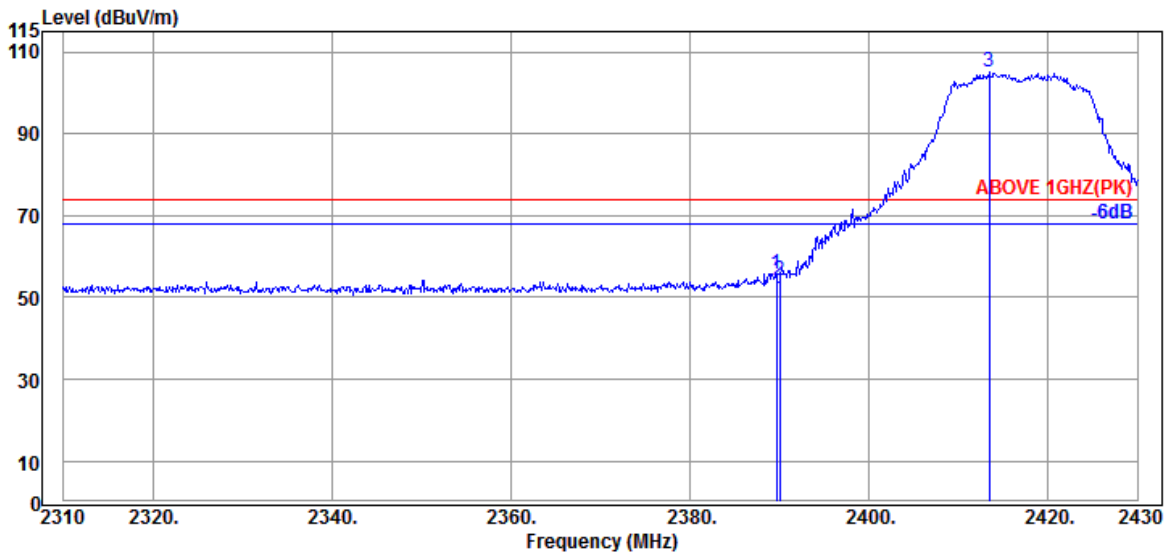

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	61.80	55.79	74.00	18.21	Peak
2390.040	28.20	5.72	39.93	60.24	54.23	74.00	19.77	Peak
@ 2413.440	28.26	5.76	39.93	111.06	105.15	---	---	Peak

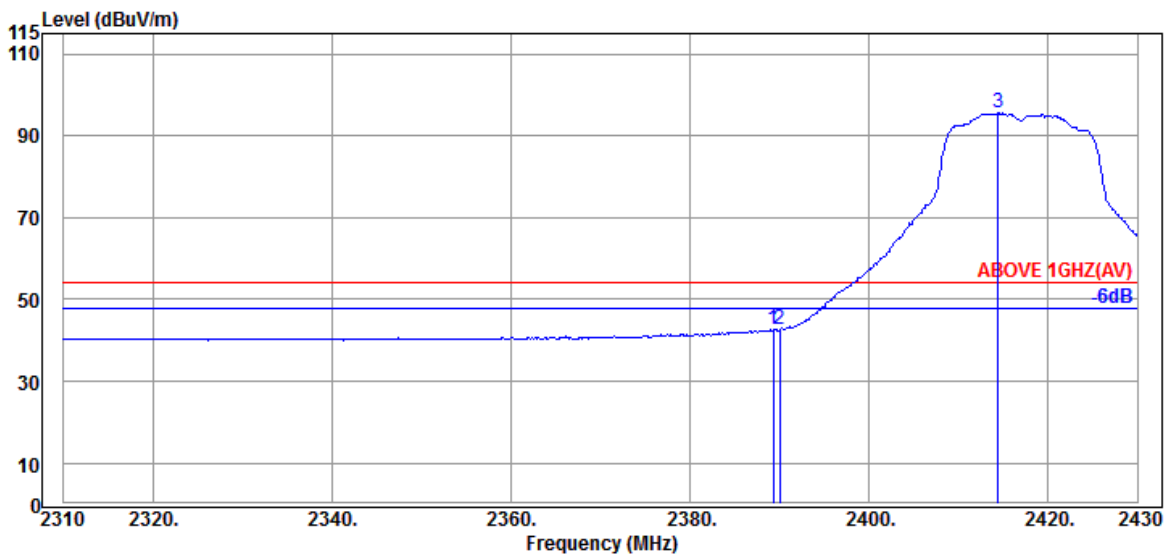


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.20	5.72	39.93	48.69	42.68	54.00	11.32	Average
2390.040	28.20	5.72	39.93	48.61	42.60	54.00	11.40	Average
@ 2414.400	28.26	5.76	39.93	101.43	95.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

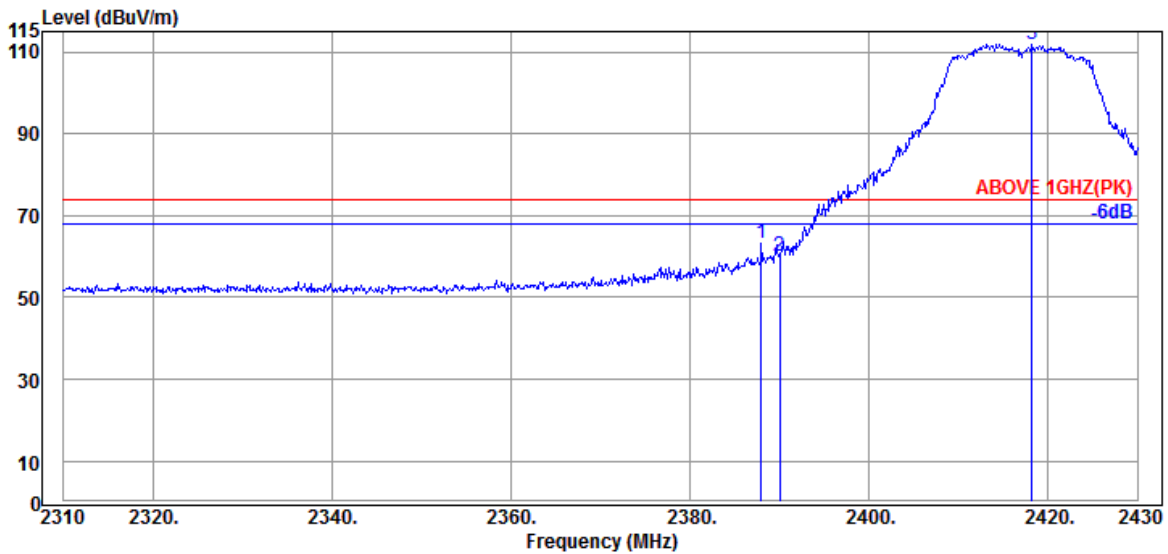

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.72	39.93	69.09	63.08	74.00	10.92	Peak
2390.040	28.20	5.72	39.93	66.02	60.01	74.00	13.99	Peak
@ 2418.240	28.29	5.77	39.93	117.84	111.97	---	---	Peak

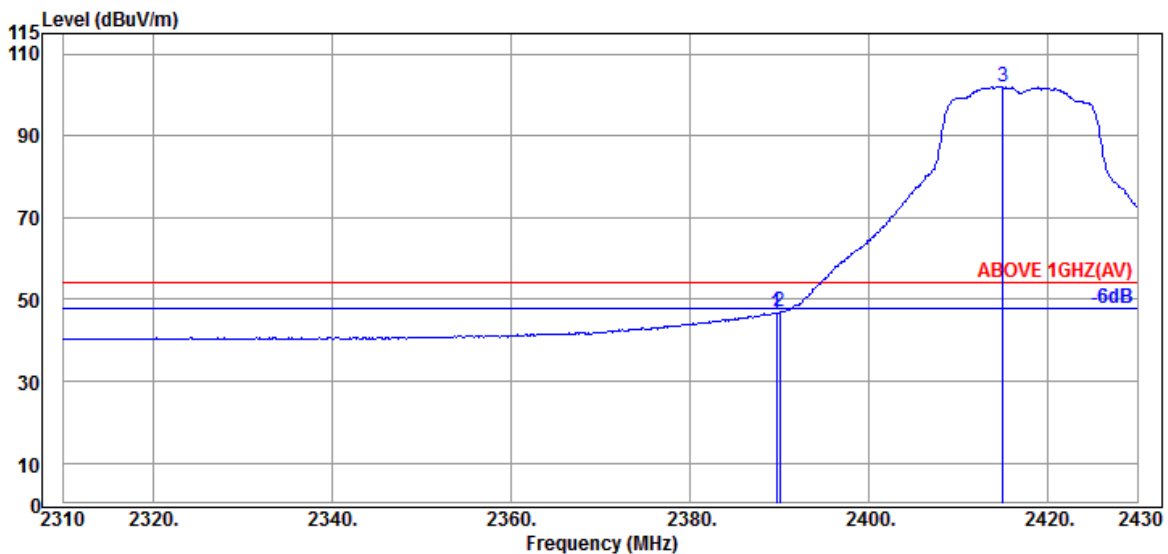


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	52.72	46.71	54.00	7.29	Average
2390.040	28.20	5.72	39.93	53.08	47.07	54.00	6.93	Average
@ 2415.000	28.26	5.76	39.93	107.83	101.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

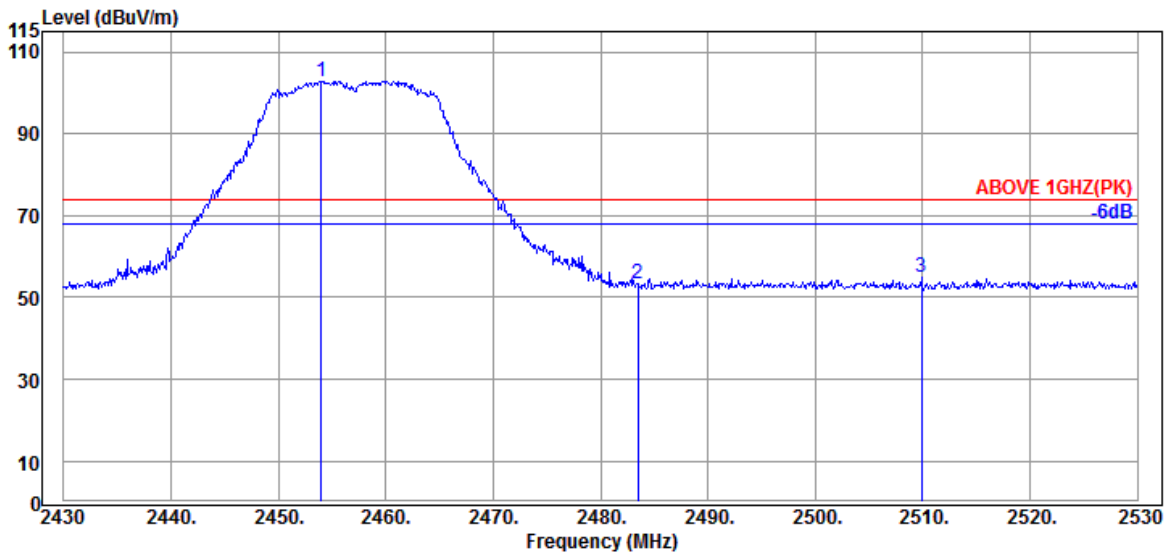

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	28.41	5.83	39.92	108.62	102.94	---	---	Peak
2483.500	28.47	5.87	39.92	59.00	53.42	74.00	20.58	Peak
2509.900	28.53	5.91	39.92	60.29	54.81	74.00	19.19	Peak

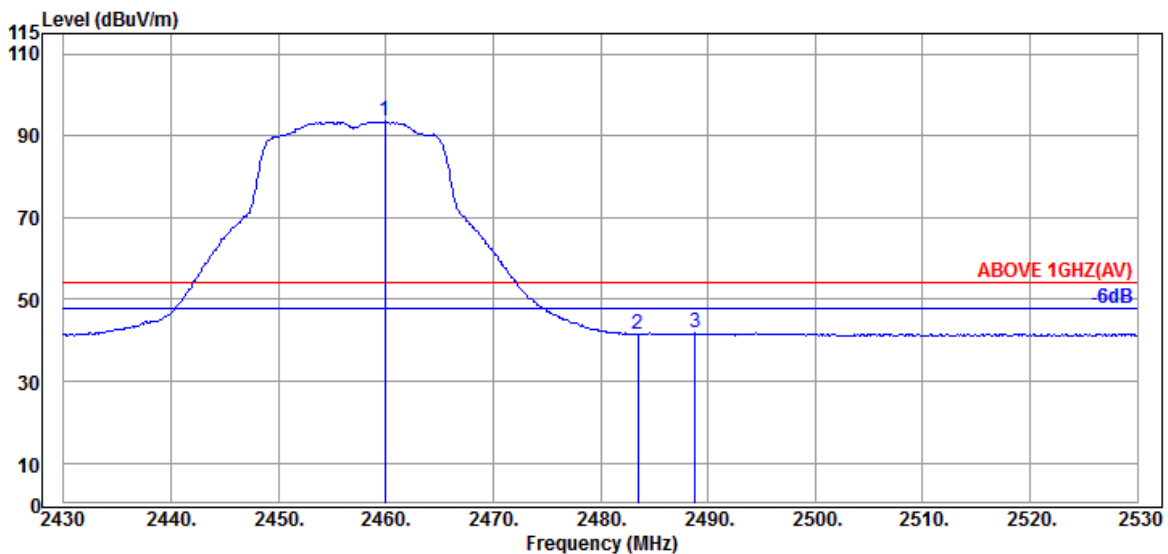


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	28.41	5.83	39.92	99.15	93.47	---	---	Average
2483.500	28.47	5.87	39.92	47.13	41.55	54.00	12.45	Average
2488.800	28.47	5.87	39.92	47.34	41.76	54.00	12.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

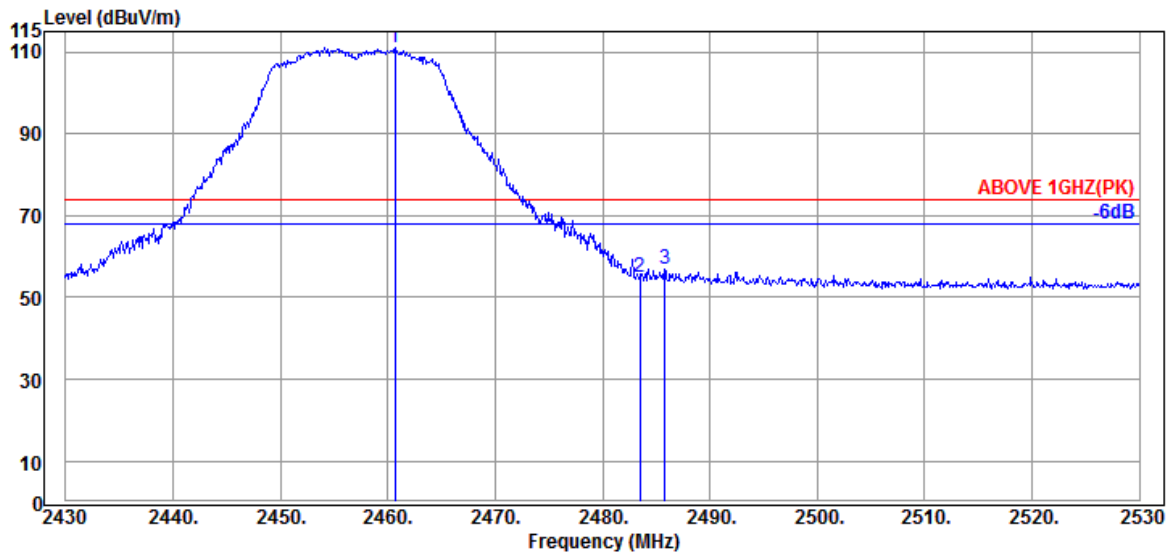

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.43	5.84	39.92	116.67	111.02	---	---	Peak
2483.500	28.47	5.87	39.92	60.62	55.04	74.00	18.96	Peak
2485.800	28.47	5.87	39.92	62.38	56.80	74.00	17.20	Peak

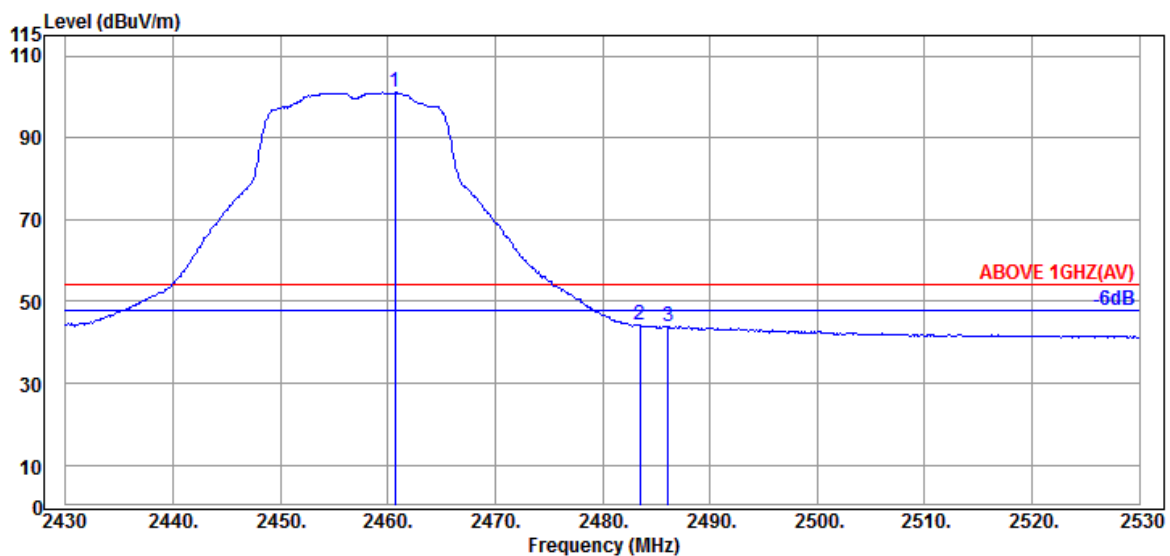


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.43	5.84	39.92	106.68	101.03	---	---	Average
2483.500	28.47	5.87	39.92	49.65	44.07	54.00	9.93	Average
2486.100	28.47	5.87	39.92	49.59	44.01	54.00	9.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

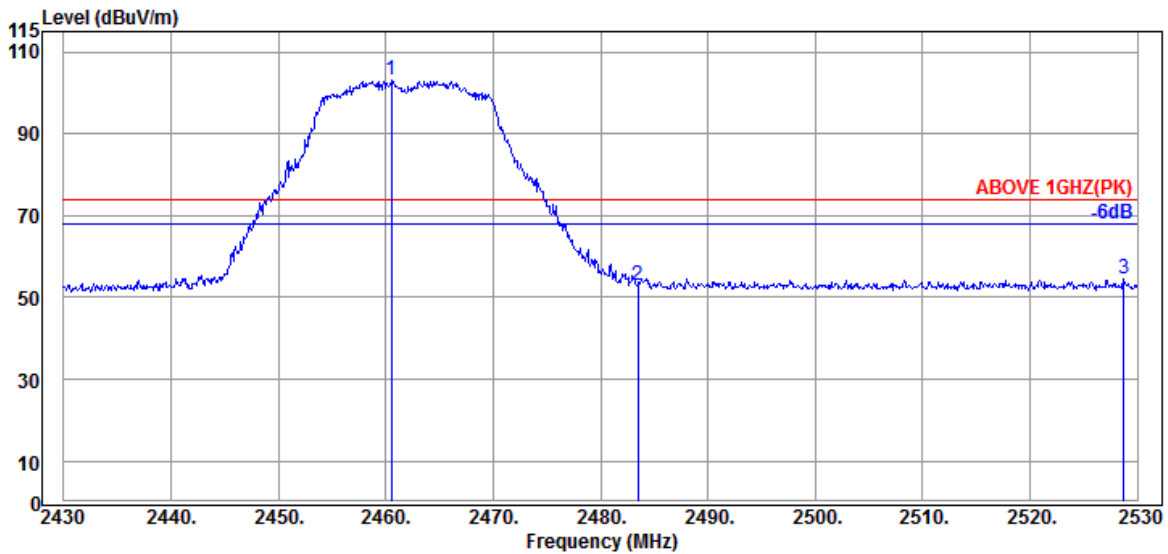

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	28.43	5.84	39.92	108.77	103.12	---	---	Peak
2483.500	28.47	5.87	39.92	58.61	53.03	74.00	20.97	Peak
2528.700	28.61	5.96	39.93	60.00	54.64	74.00	19.36	Peak

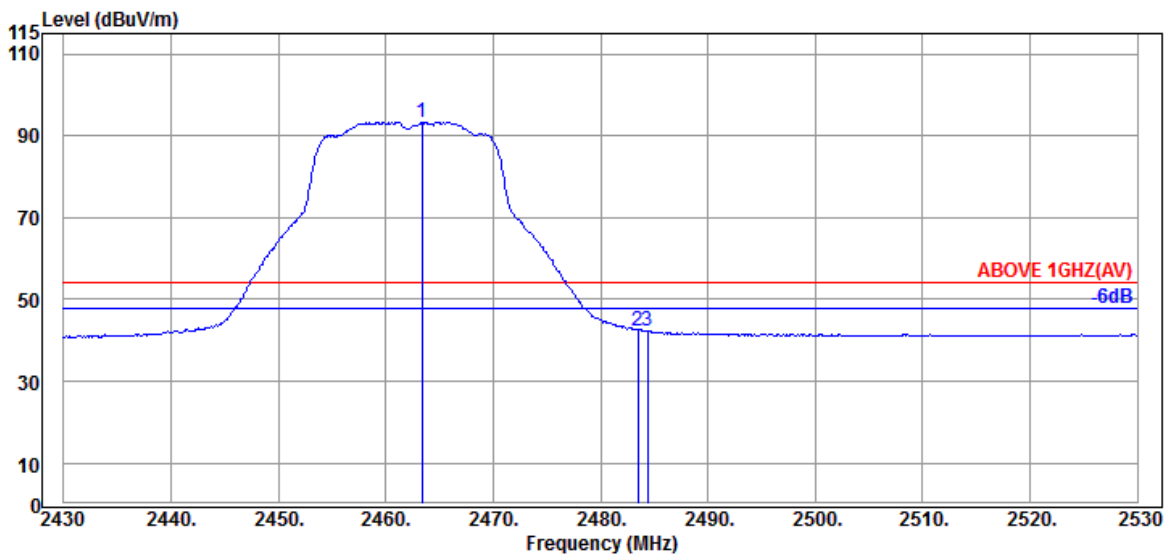


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	5.84	39.92	99.01	93.36	---	---	Average
2483.500	28.47	5.87	39.92	48.04	42.46	54.00	11.54	Average
2484.400	28.47	5.87	39.92	47.84	42.26	54.00	11.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

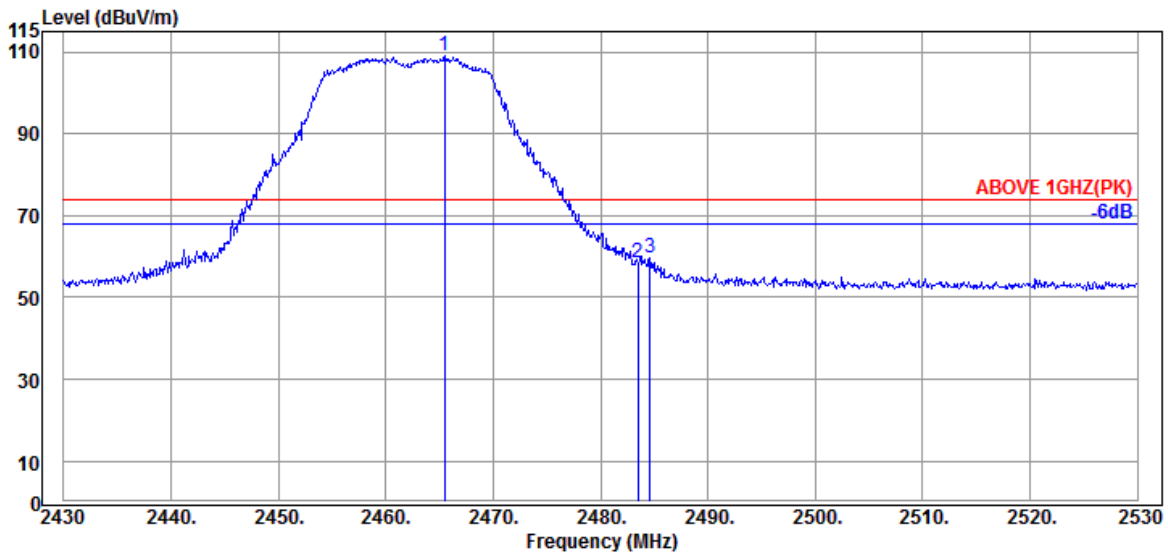

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	5.84	39.92	114.54	108.89	---	---	Peak
2483.500	28.47	5.87	39.92	63.88	58.30	74.00	15.70	Peak
2484.600	28.47	5.87	39.92	65.33	59.75	74.00	14.25	Peak

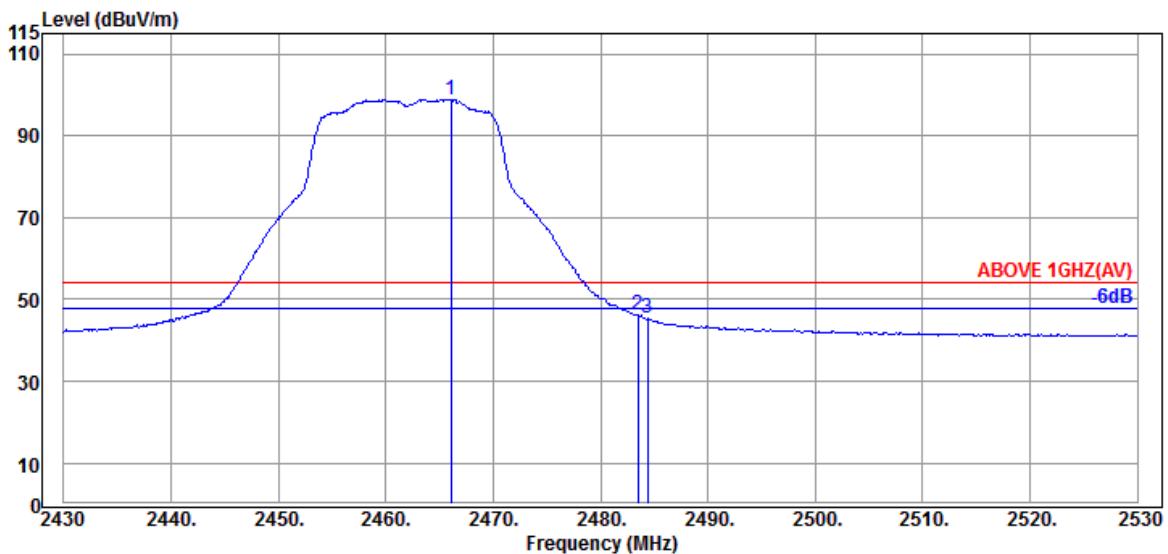


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.43	5.84	39.92	104.58	98.93	---	---	Average
2483.500	28.47	5.87	39.92	51.76	46.18	54.00	7.82	Average
2484.400	28.47	5.87	39.92	50.92	45.34	54.00	8.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

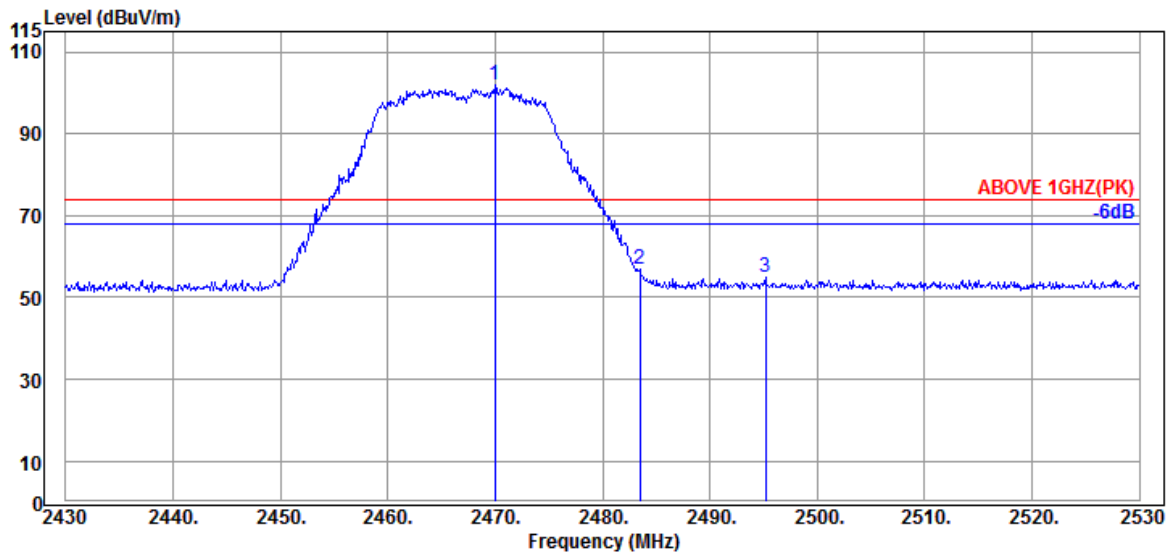

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.44	5.85	39.92	107.42	101.79	---	---	Peak
2483.500	28.47	5.87	39.92	62.60	57.02	74.00	16.98	Peak
2495.200	28.49	5.88	39.92	60.61	55.06	74.00	18.94	Peak

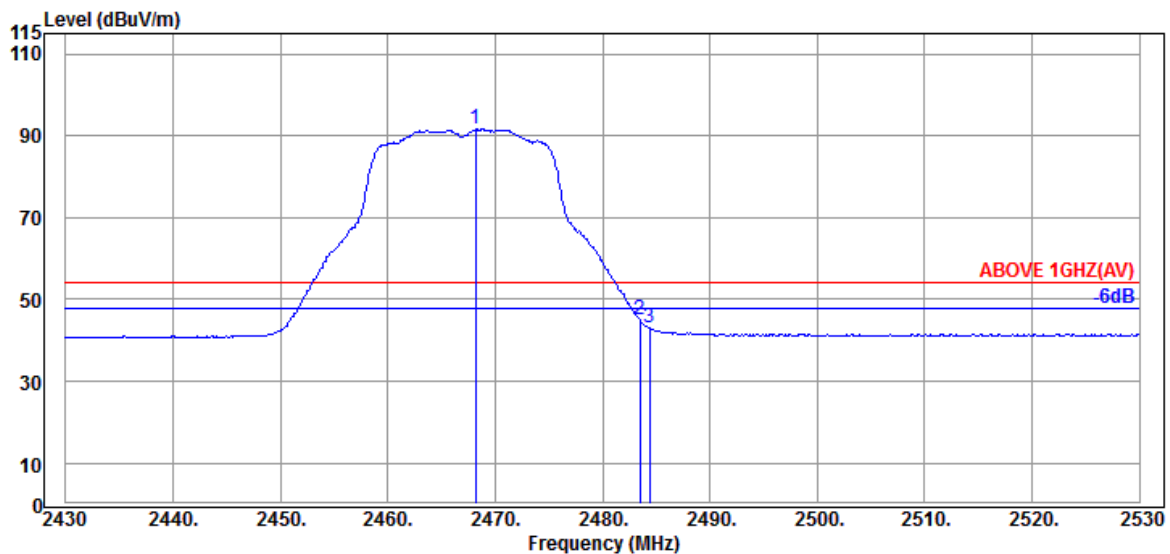


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	5.85	39.92	97.21	91.58	---	---	Average
2483.500	28.47	5.87	39.92	50.55	44.97	54.00	9.03	Average
2484.400	28.47	5.87	39.92	48.64	43.06	54.00	10.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

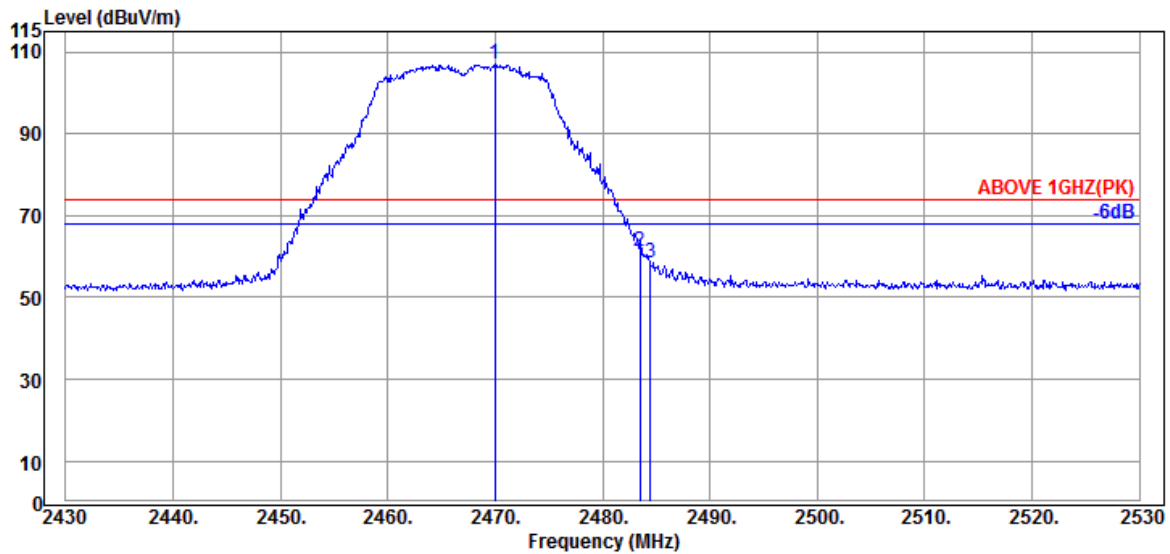

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.44	5.85	39.92	112.54	106.91	---	---	Peak
2483.500	28.47	5.87	39.92	67.01	61.43	74.00	12.57	Peak
2484.500	28.47	5.87	39.92	64.19	58.61	74.00	15.39	Peak

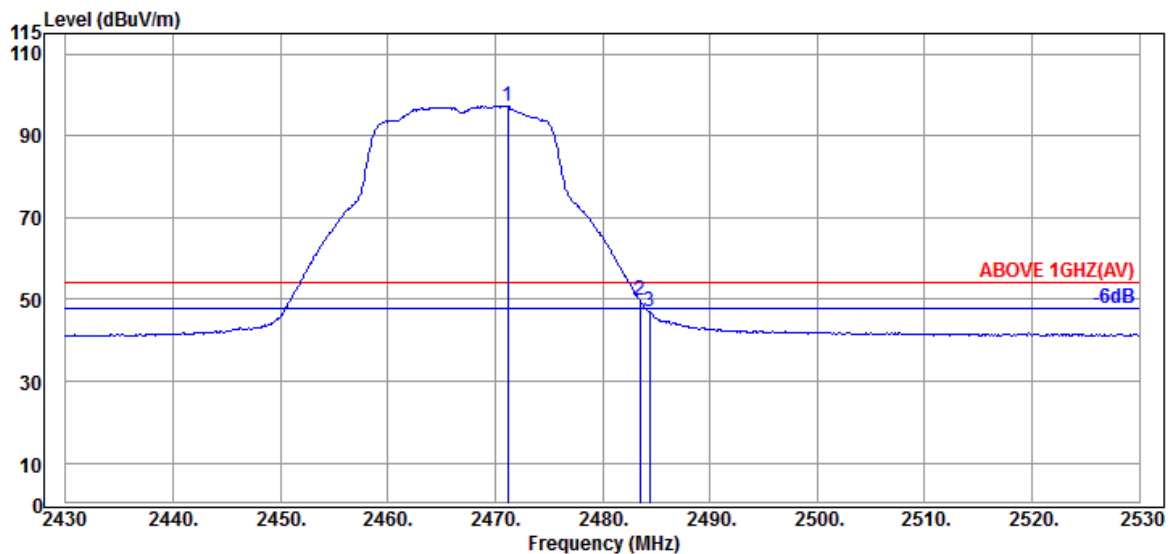


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	5.85	39.92	102.94	97.31	---	---	Average
2483.500	28.47	5.87	39.92	55.28	49.70	54.00	4.30	Average
2484.400	28.47	5.87	39.92	52.44	46.86	54.00	7.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

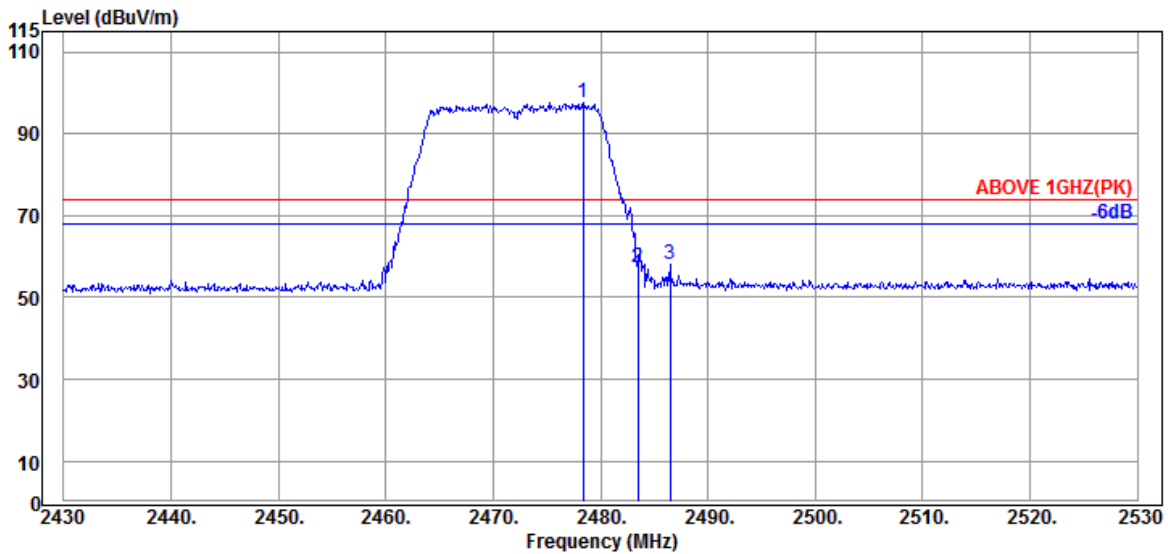

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	5.86	39.92	103.18	97.58	---	---	Peak
2483.500	28.47	5.87	39.92	62.71	57.13	74.00	16.87	Peak
2486.500	28.47	5.87	39.92	63.75	58.17	74.00	15.83	Peak

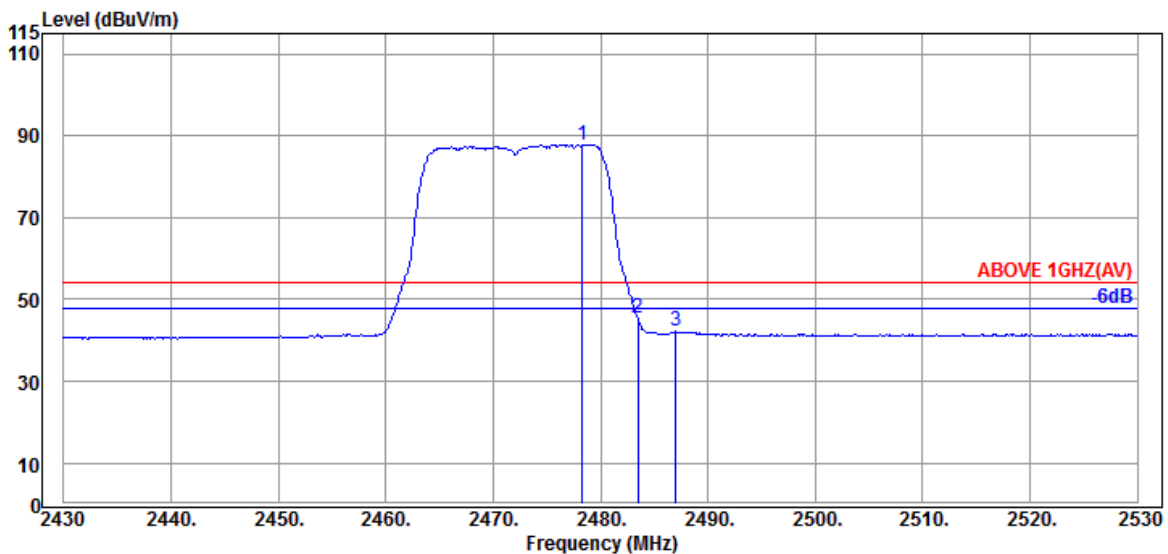


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	28.46	5.86	39.92	93.48	87.88	---	---	Average
2483.500	28.47	5.87	39.92	51.14	45.56	54.00	8.44	Average
2487.000	28.47	5.87	39.92	47.75	42.17	54.00	11.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

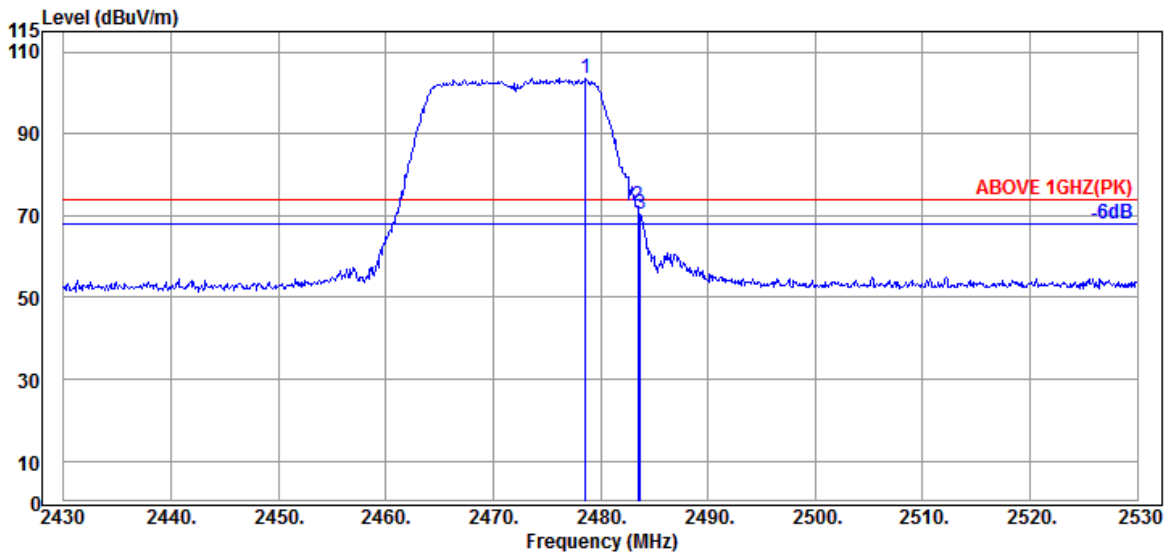

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.46	5.86	39.92	109.32	103.72	---	---	Peak
2483.500	28.47	5.87	39.92	77.84	72.26	74.00	1.74	Peak
2483.700	28.47	5.87	39.92	75.78	70.20	74.00	3.80	Peak

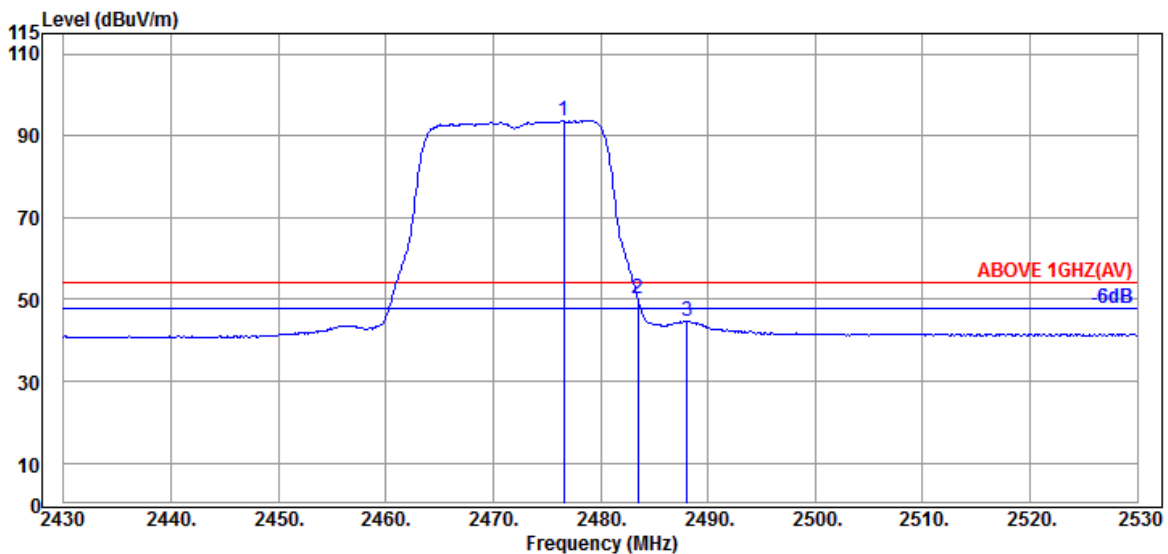


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.46	5.86	39.92	99.33	93.73	---	---	Average
2483.500	28.47	5.87	39.92	55.75	50.17	54.00	3.83	Average
2488.100	28.47	5.87	39.92	50.28	44.70	54.00	9.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

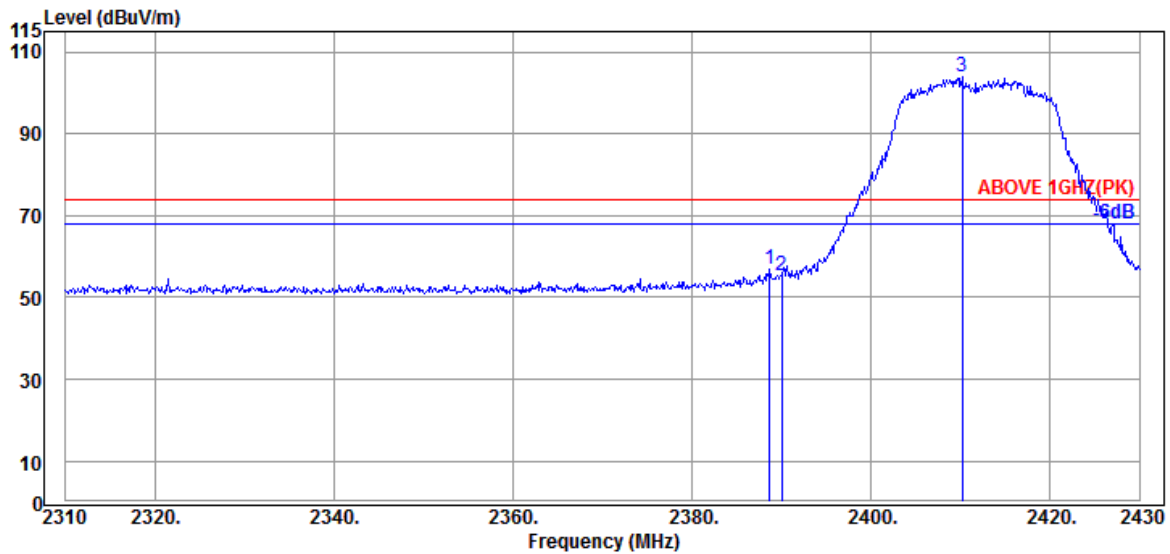

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.20	5.72	39.93	62.79	56.78	74.00	17.22	Peak
2390.040	28.20	5.72	39.93	61.51	55.50	74.00	18.50	Peak
@ 2410.200	28.23	5.75	39.93	109.97	104.02	---	---	Peak

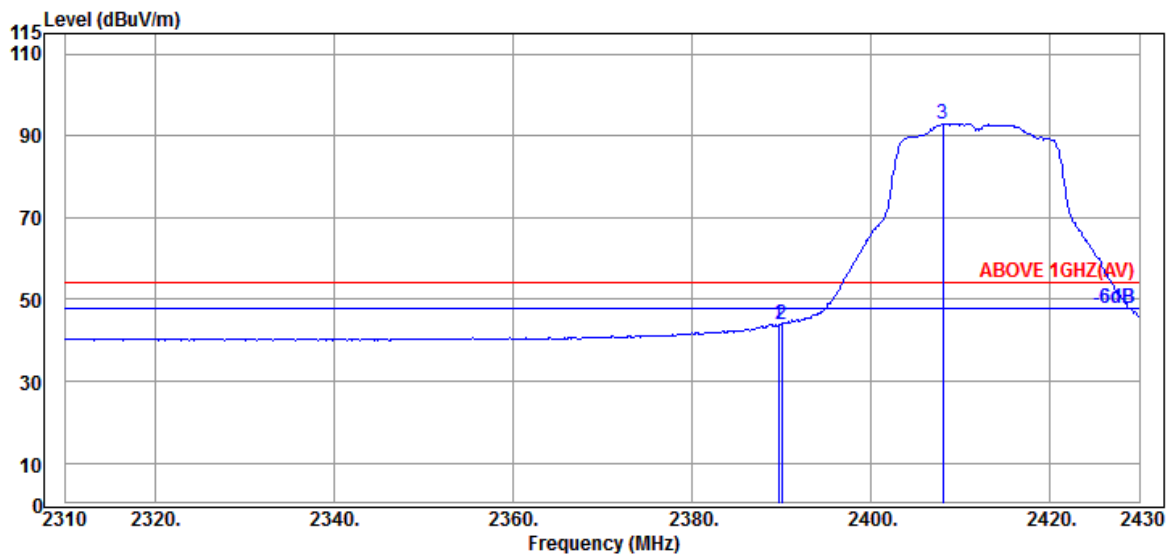


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	49.78	43.77	54.00	10.23	Average
2390.040	28.20	5.72	39.93	49.85	43.84	54.00	10.16	Average
@ 2408.040	28.23	5.75	39.93	98.90	92.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

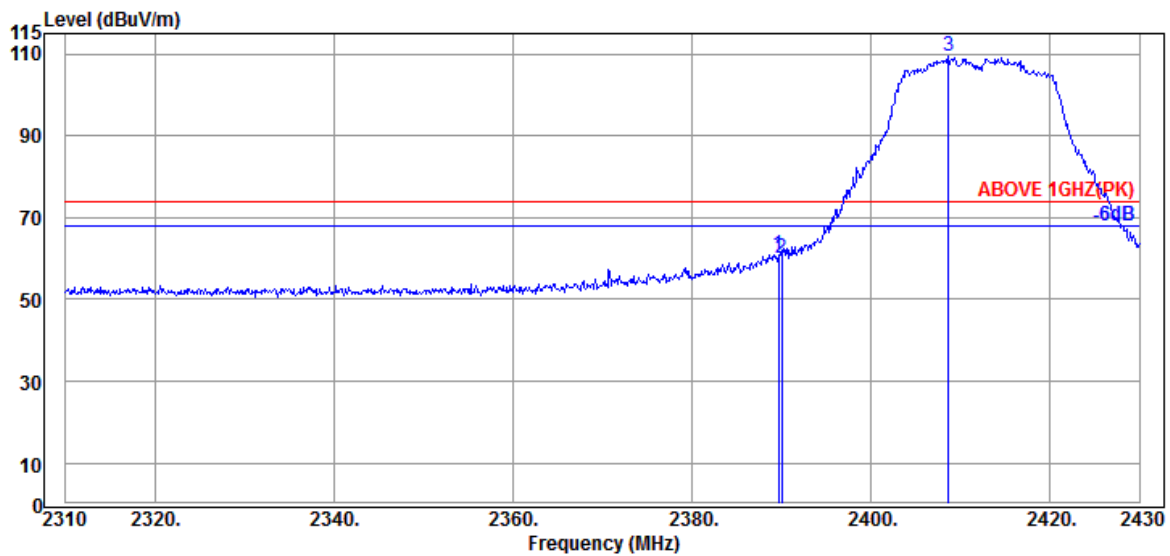

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	67.02	61.01	74.00	12.99	Peak
2390.040	28.20	5.72	39.93	66.02	60.01	74.00	13.99	Peak
@ 2408.640	28.23	5.75	39.93	115.35	109.40	---	---	Peak

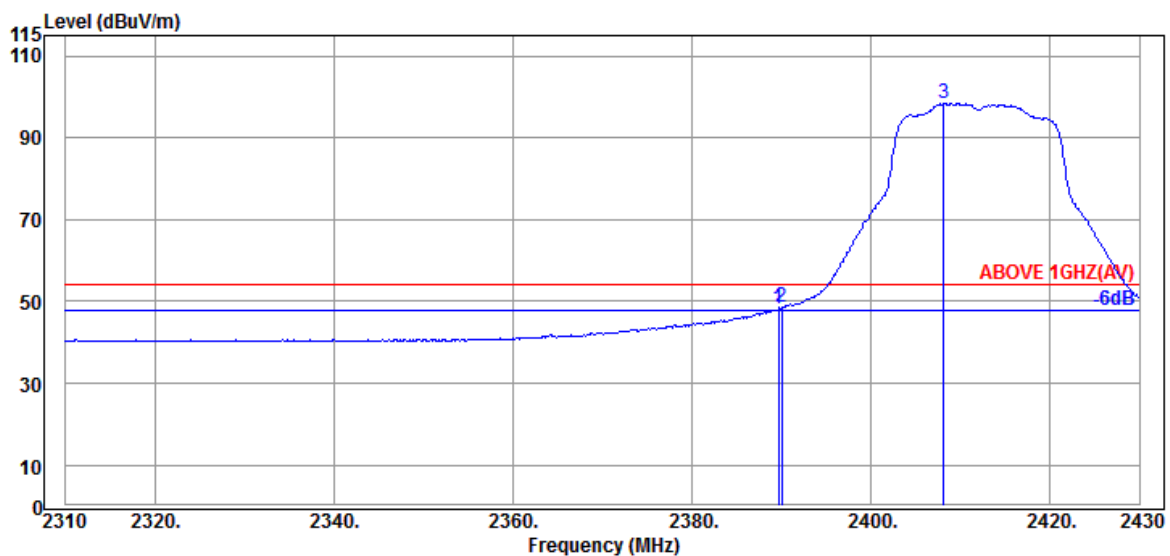


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	54.21	48.20	54.00	5.80	Average
2390.040	28.20	5.72	39.93	54.45	48.44	54.00	5.56	Average
@ 2408.160	28.23	5.75	39.93	104.45	98.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

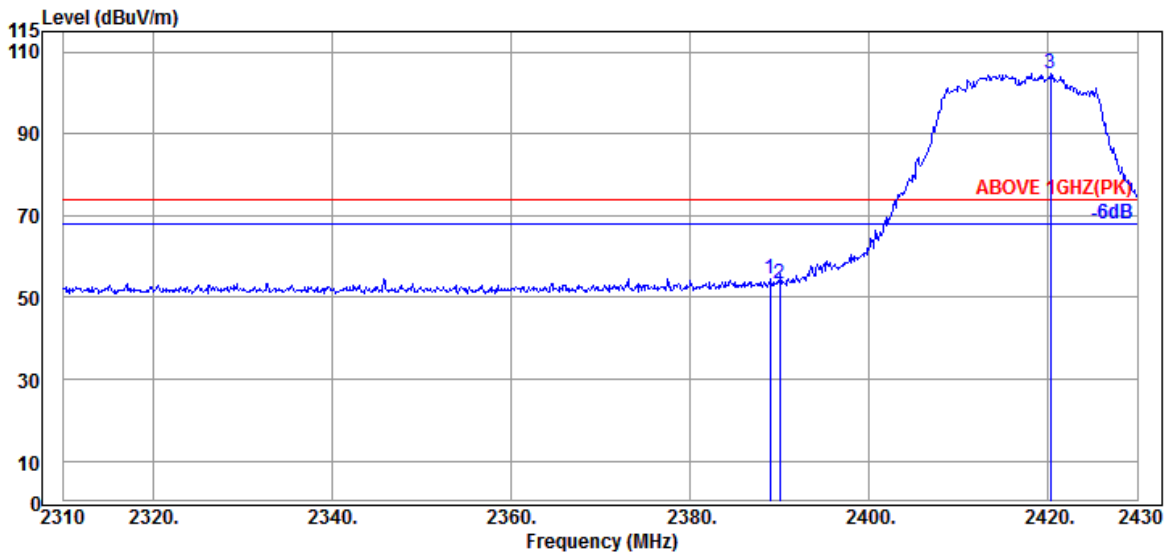

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.20	5.72	39.93	60.70	54.69	74.00	19.31	Peak
2390.040	28.20	5.72	39.93	59.46	53.45	74.00	20.55	Peak
@ 2420.280	28.29	5.77	39.93	110.70	104.83	---	---	Peak

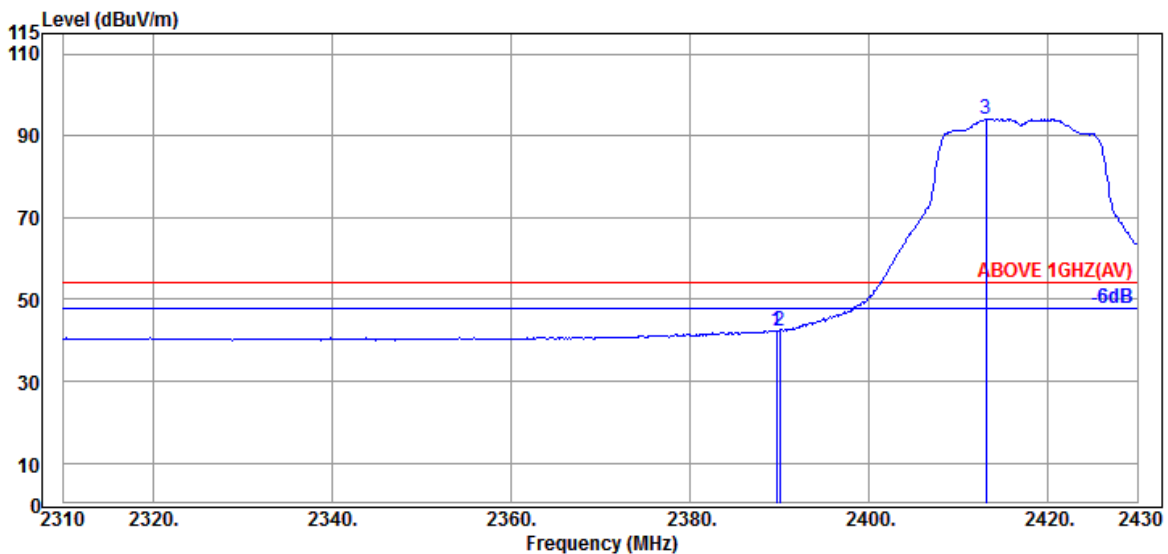


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	48.41	42.40	54.00	11.60	Average
2390.040	28.20	5.72	39.93	48.36	42.35	54.00	11.65	Average
@ 2413.080	28.26	5.76	39.93	99.98	94.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

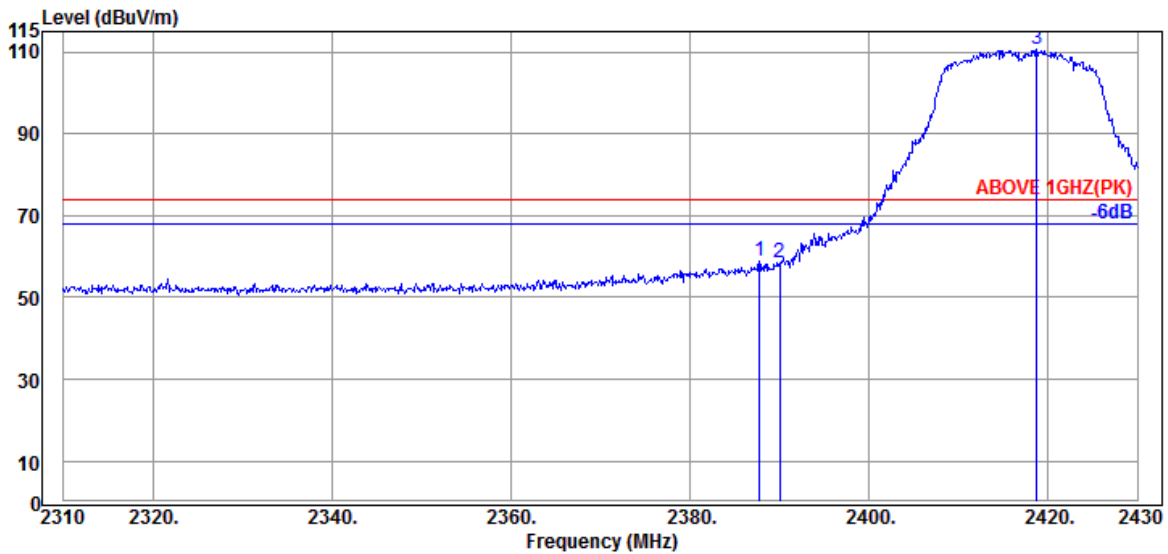

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.760	28.20	5.72	39.93	65.08	59.07	74.00	14.93	Peak
2390.040	28.20	5.72	39.93	64.47	58.46	74.00	15.54	Peak
@ 2418.720	28.29	5.77	39.93	116.58	110.71	---	---	Peak

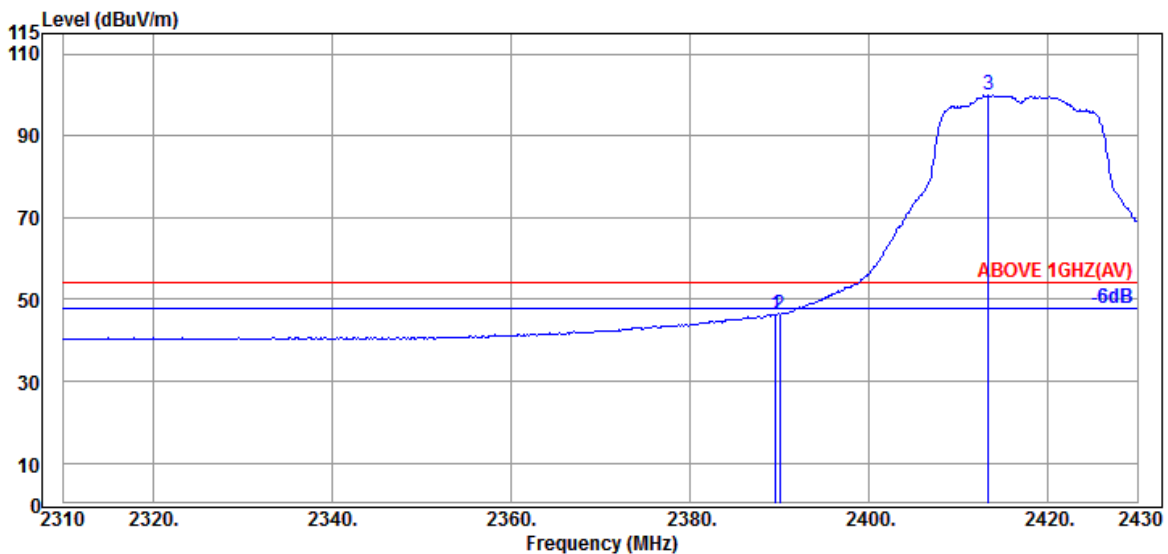


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.93	52.26	46.25	54.00	7.75	Average
2390.040	28.20	5.72	39.93	52.44	46.43	54.00	7.57	Average
@ 2413.320	28.26	5.76	39.93	105.74	99.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

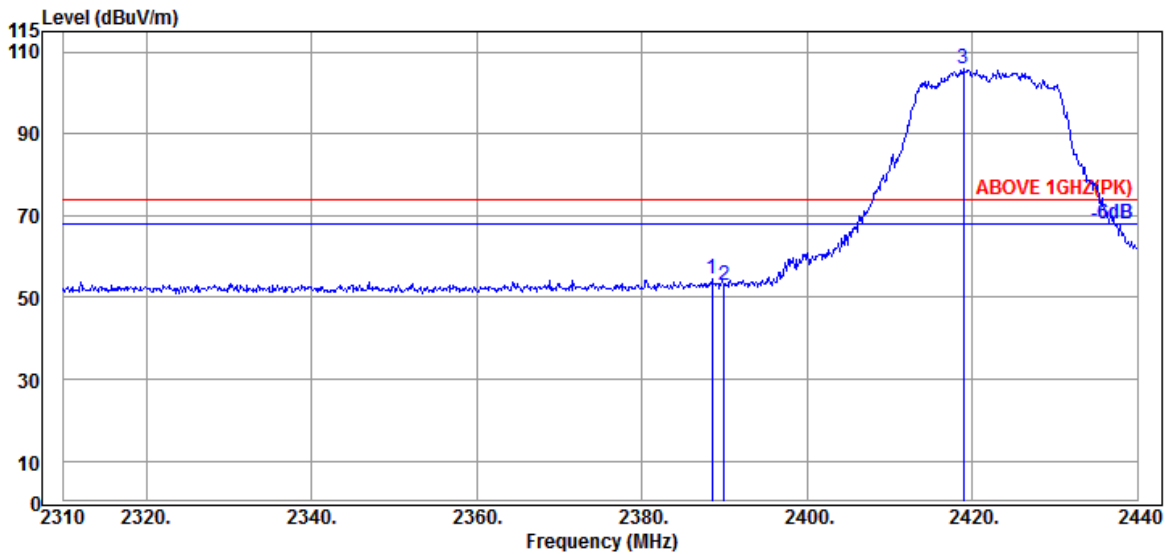

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.520	28.20	5.72	39.93	60.50	54.49	74.00	19.51	Peak
2389.950	28.20	5.72	39.93	59.14	53.13	74.00	20.87	Peak
@ 2418.940	28.29	5.77	39.93	111.74	105.87	---	---	Peak

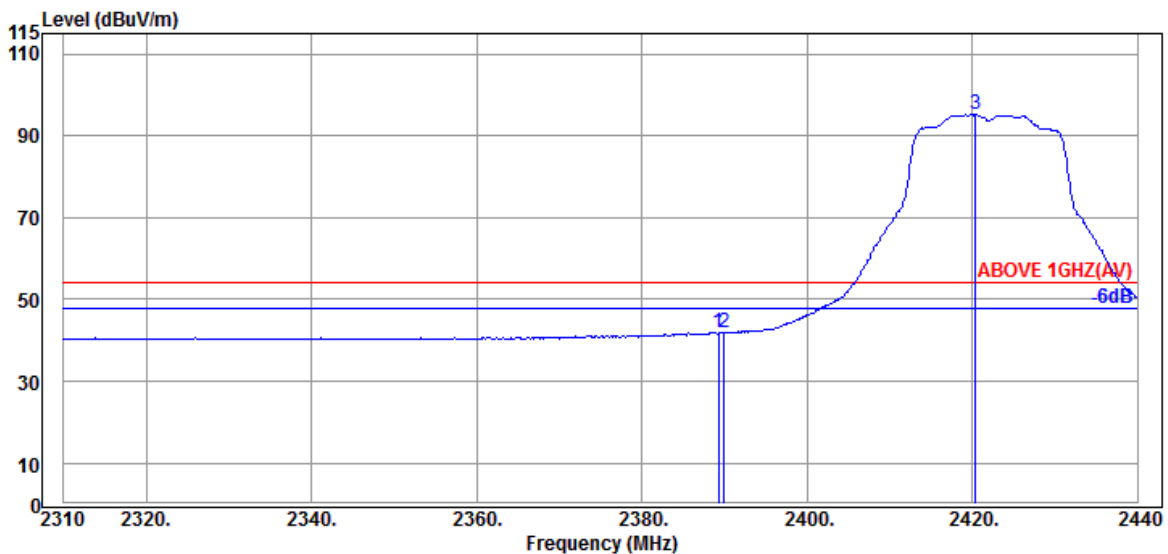


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.72	39.93	47.90	41.89	54.00	12.11	Average
2389.950	28.20	5.72	39.93	47.74	41.73	54.00	12.27	Average
@ 2420.370	28.29	5.77	39.93	101.15	95.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

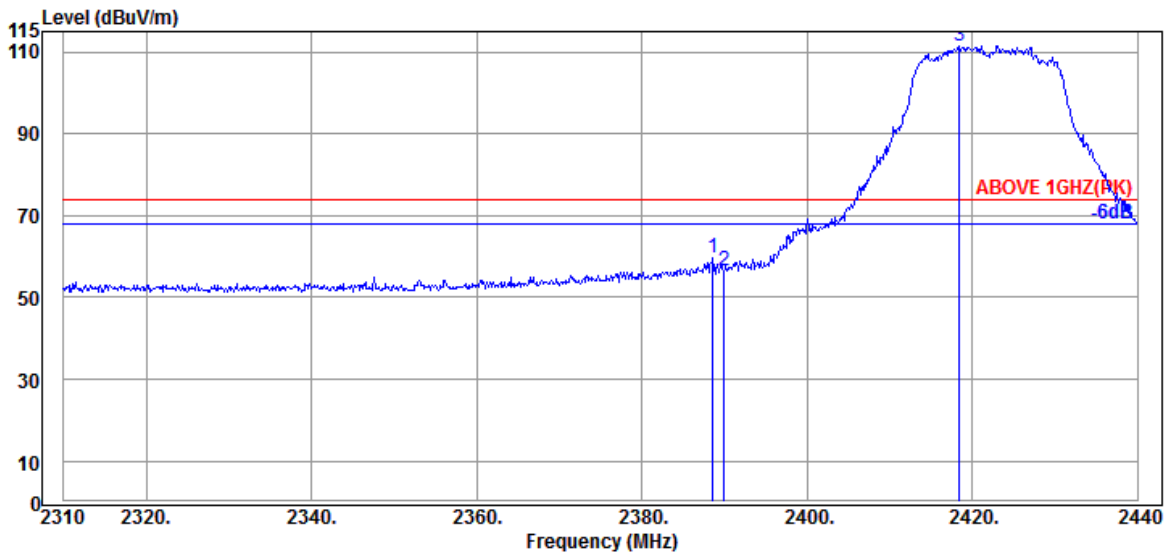

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.72	39.93	65.65	59.64	74.00	14.36	Peak
2389.950	28.20	5.72	39.93	62.62	56.61	74.00	17.39	Peak
@ 2418.420	28.29	5.77	39.93	117.37	111.50	---	---	Peak

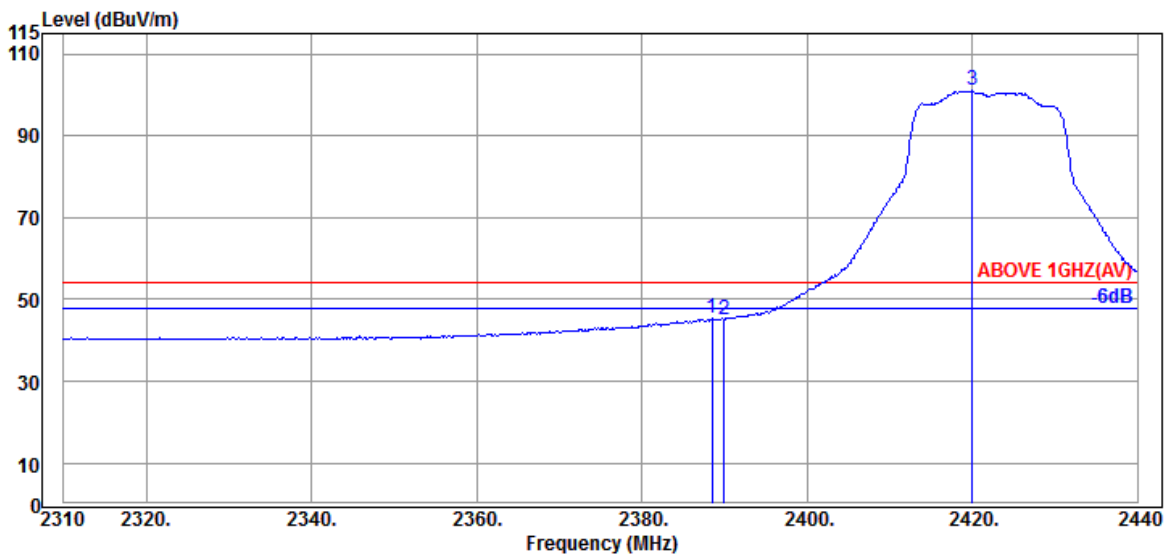


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.520	28.20	5.72	39.93	51.26	45.25	54.00	8.75	Average
2389.950	28.20	5.72	39.93	51.15	45.14	54.00	8.86	Average
@ 2419.980	28.29	5.77	39.93	106.94	101.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

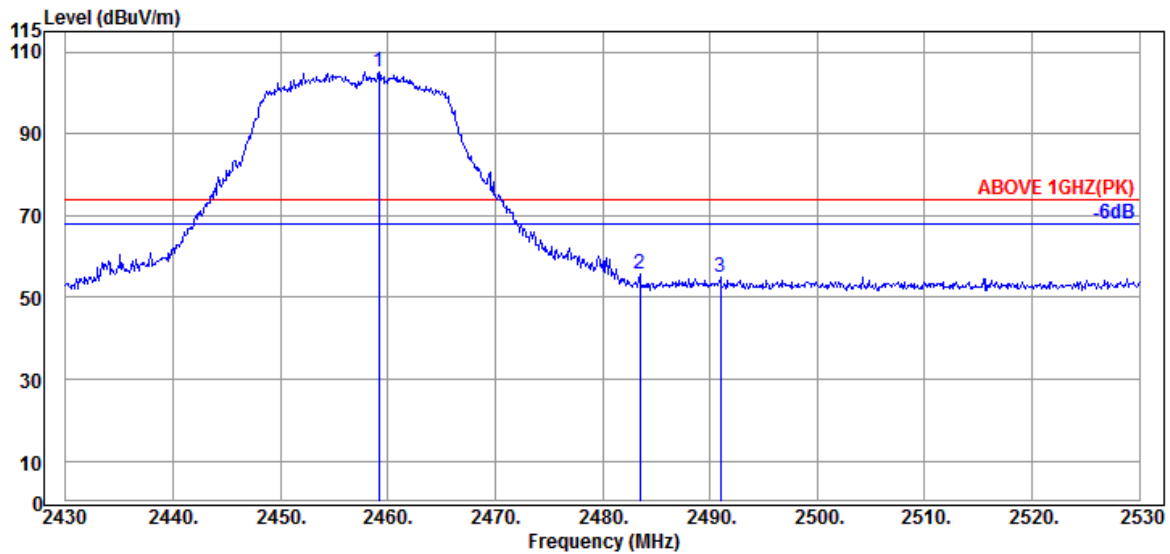

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.41	5.83	39.92	110.95	105.27	---	---	Peak
2483.500	28.47	5.87	39.92	61.27	55.69	74.00	18.31	Peak
2491.000	28.49	5.88	39.92	60.49	54.94	74.00	19.06	Peak

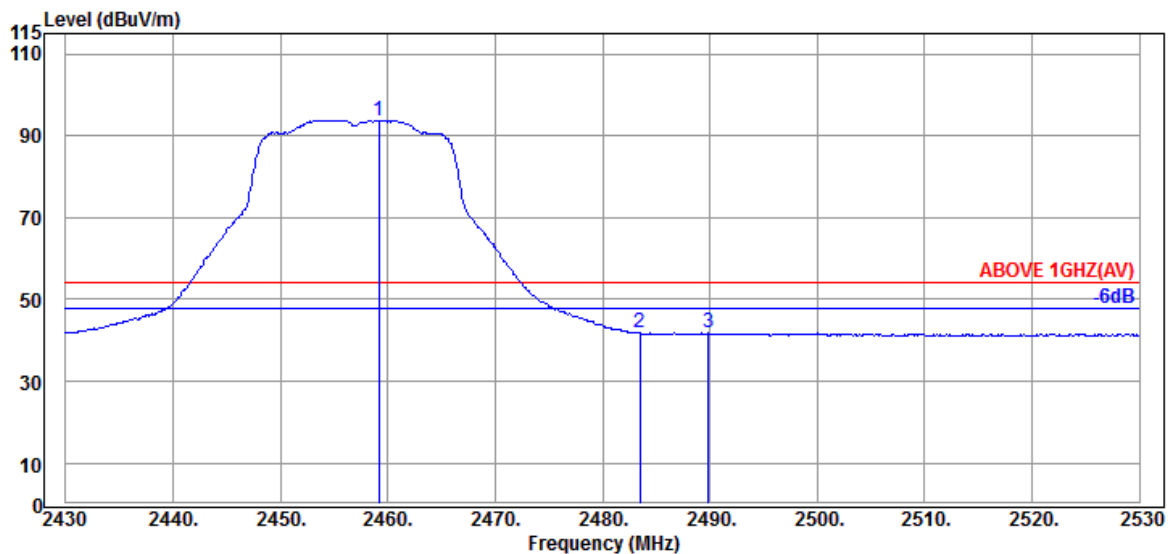


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.41	5.83	39.92	99.53	93.85	---	---	Average
2483.500	28.47	5.87	39.92	47.29	41.71	54.00	12.29	Average
2489.900	28.49	5.88	39.92	47.35	41.80	54.00	12.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

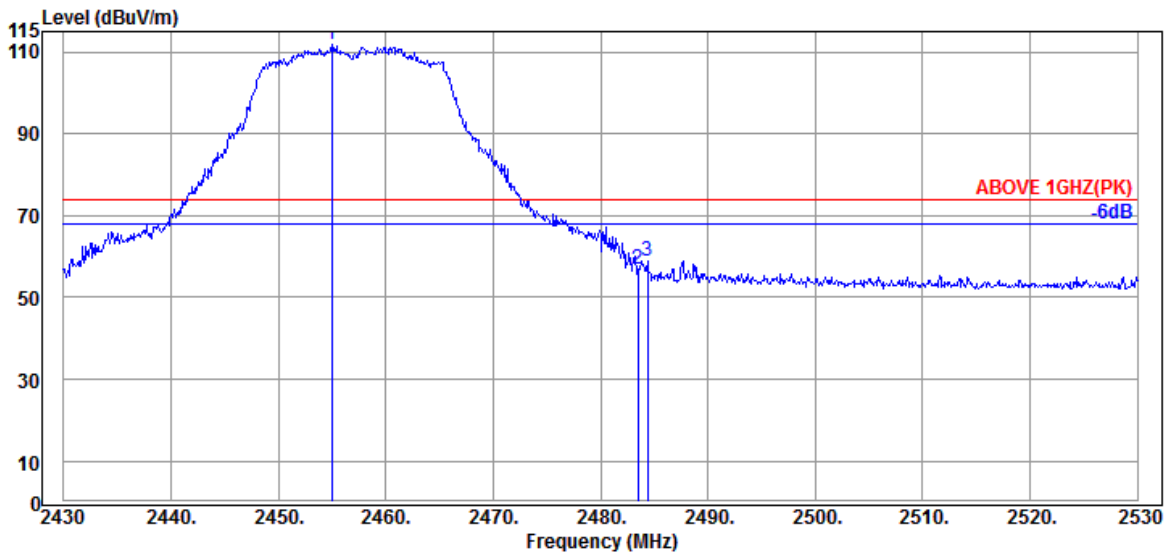

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	28.41	5.83	39.92	117.34	111.66	---	---	Peak
2483.500	28.47	5.87	39.92	62.31	56.73	74.00	17.27	Peak
2484.400	28.47	5.87	39.92	64.36	58.78	74.00	15.22	Peak

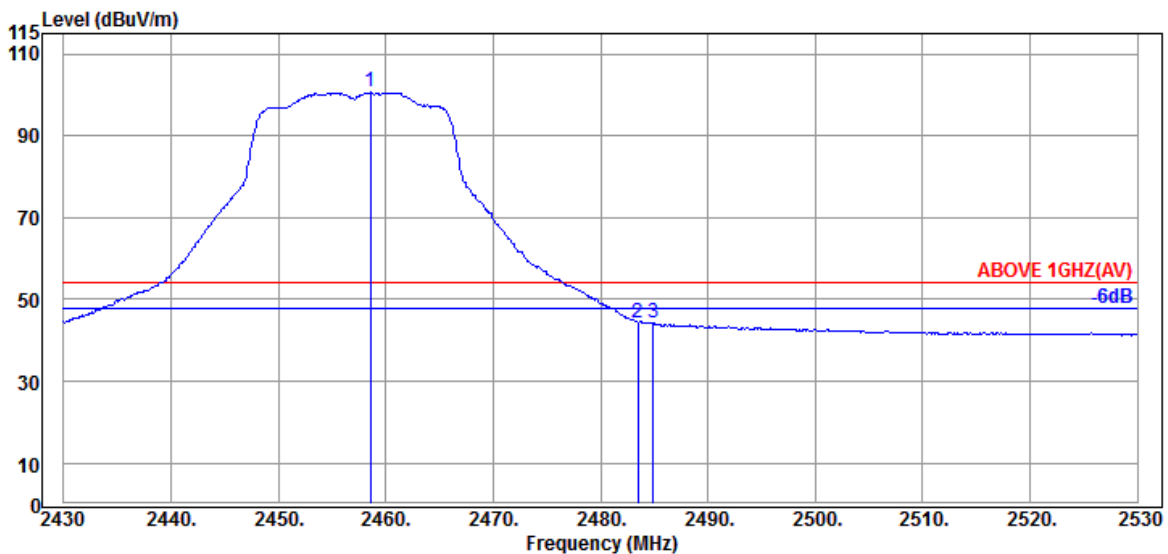


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	28.41	5.83	39.92	106.29	100.61	---	---	Average
2483.500	28.47	5.87	39.92	50.01	44.43	54.00	9.57	Average
2484.900	28.47	5.87	39.92	50.01	44.43	54.00	9.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

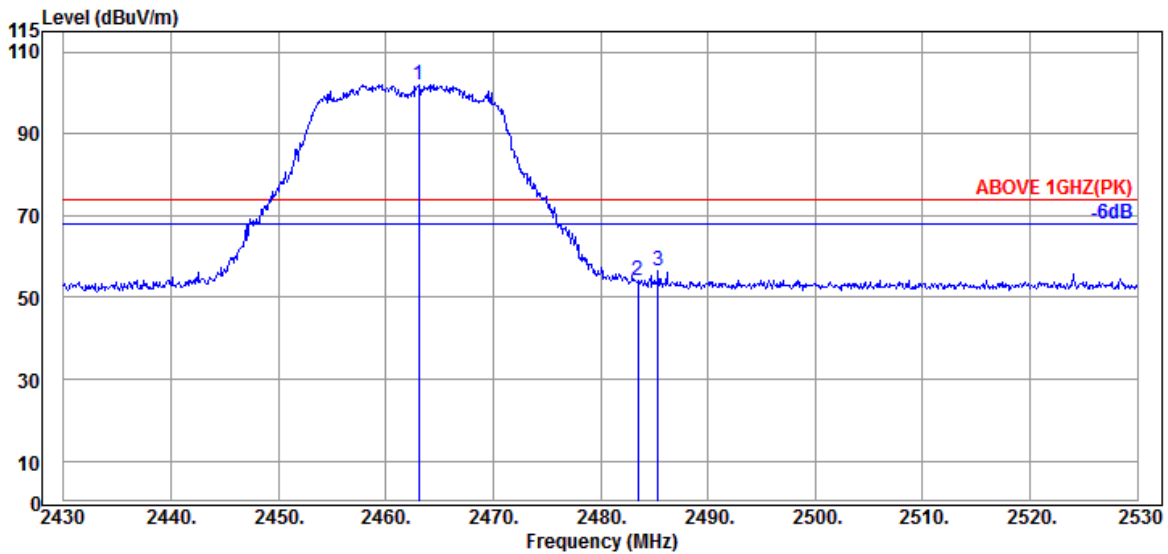

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	28.43	5.84	39.92	107.68	102.03	---	---	Peak
2483.500	28.47	5.87	39.92	59.56	53.98	74.00	20.02	Peak
2485.400	28.47	5.87	39.92	62.11	56.53	74.00	17.47	Peak

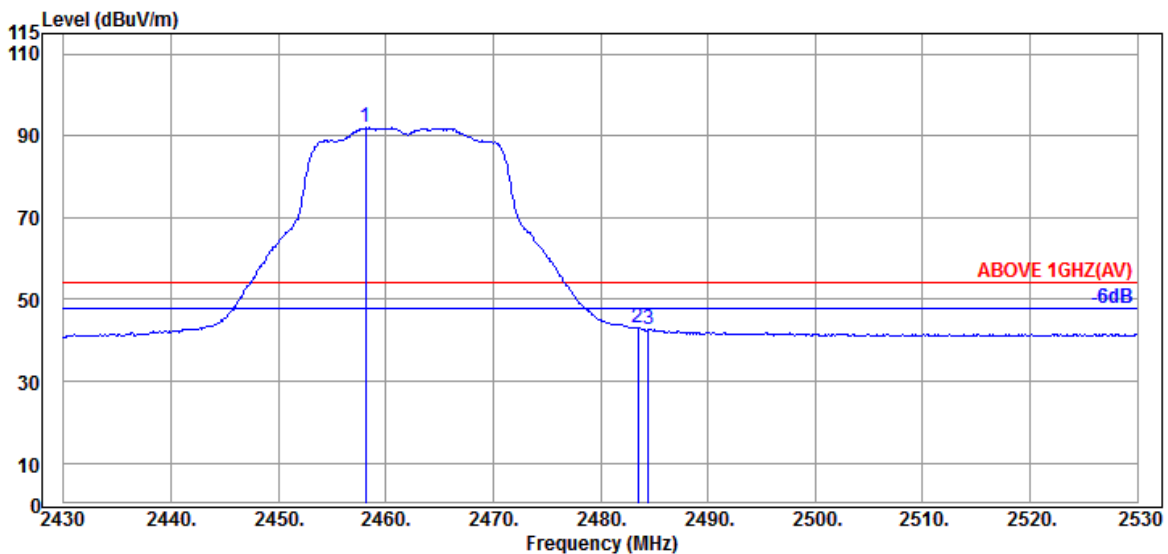


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.41	5.83	39.92	97.63	91.95	---	---	Average
2483.500	28.47	5.87	39.92	48.53	42.95	54.00	11.05	Average
2484.500	28.47	5.87	39.92	48.25	42.67	54.00	11.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

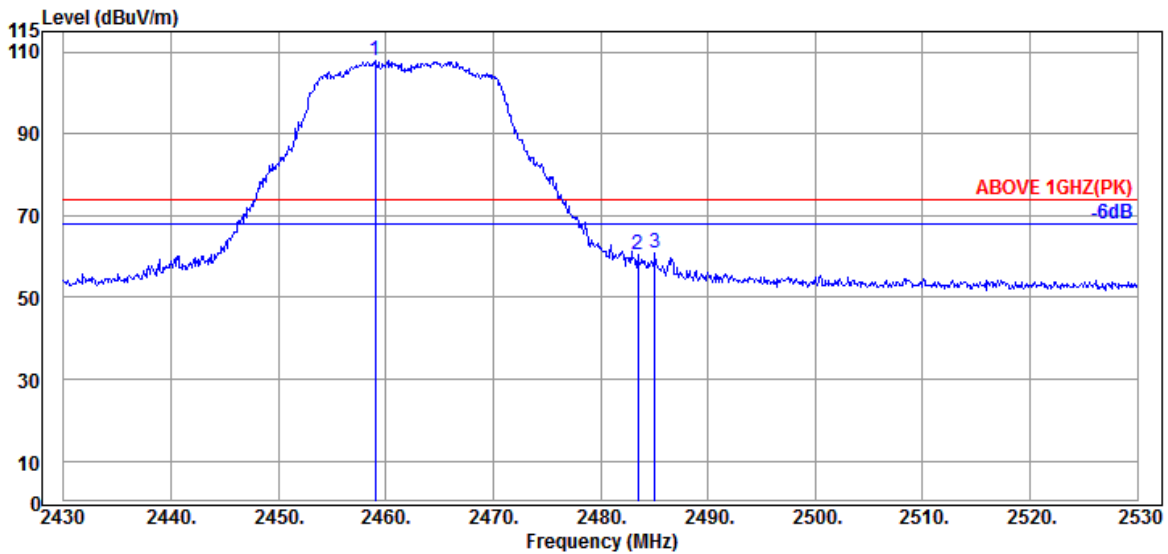

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.41	5.83	39.92	113.65	107.97	---	---	Peak
2483.500	28.47	5.87	39.92	66.09	60.51	74.00	13.49	Peak
2485.100	28.47	5.87	39.92	66.62	61.04	74.00	12.96	Peak

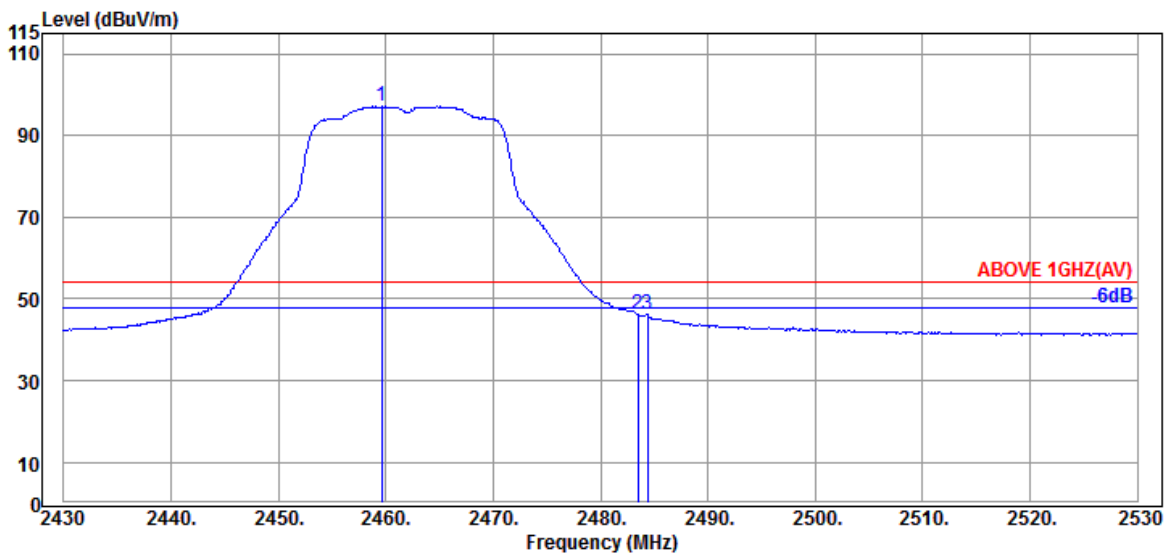


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.41	5.83	39.92	102.77	97.09	---	---	Average
2483.500	28.47	5.87	39.92	51.76	46.18	54.00	7.82	Average
2484.400	28.47	5.87	39.92	51.63	46.05	54.00	7.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

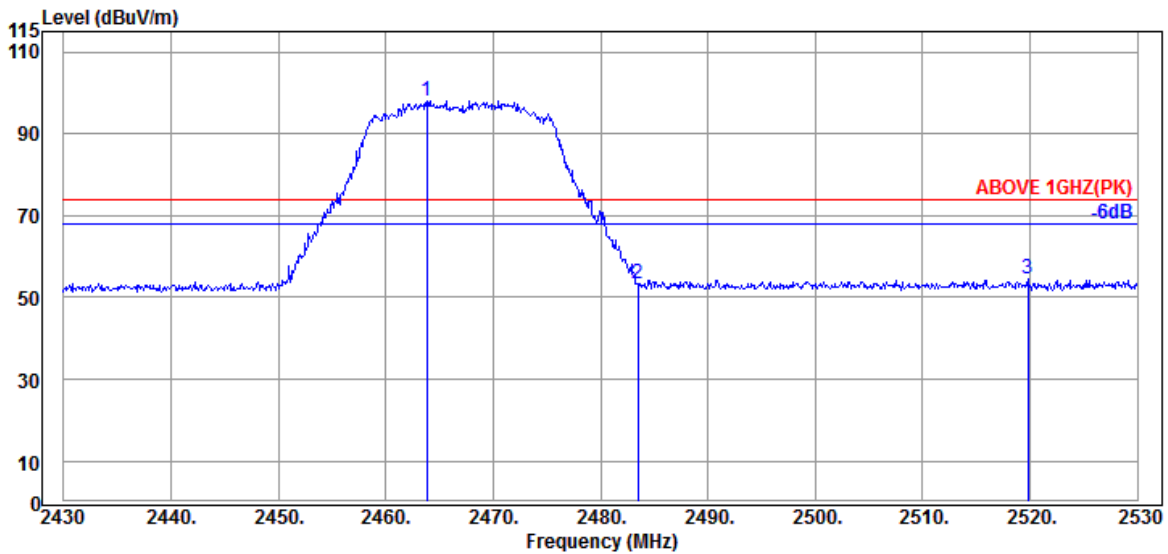

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.43	5.84	39.92	103.64	97.99	---	---	Peak
2483.500	28.47	5.87	39.92	59.02	53.44	74.00	20.56	Peak
2519.800	28.59	5.94	39.93	60.01	54.61	74.00	19.39	Peak

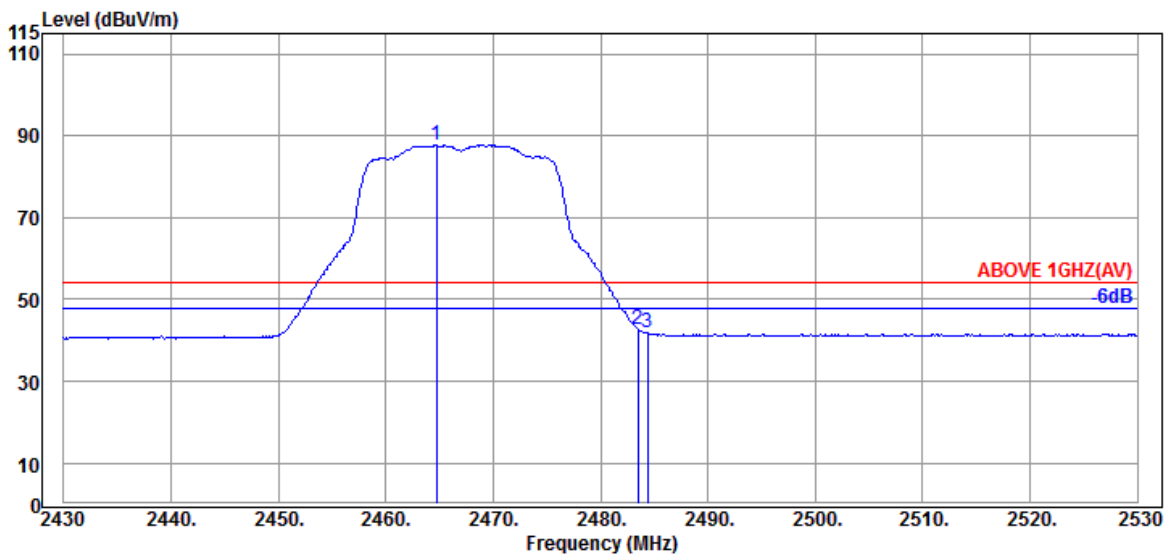


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	5.84	39.92	93.48	87.83	---	---	Average
2483.500	28.47	5.87	39.92	48.37	42.79	54.00	11.21	Average
2484.400	28.47	5.87	39.92	47.37	41.79	54.00	12.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

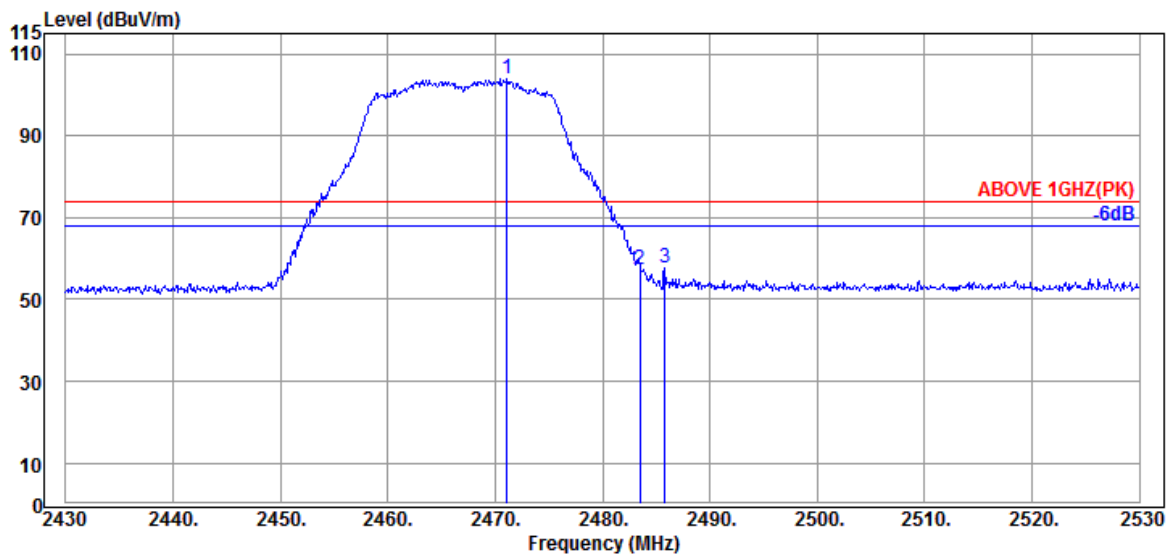

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.100	28.44	5.85	39.92	109.65	104.02	---	---	Peak
2483.500	28.47	5.87	39.92	62.85	57.27	74.00	16.73	Peak
2485.800	28.47	5.87	39.92	63.27	57.69	74.00	16.31	Peak

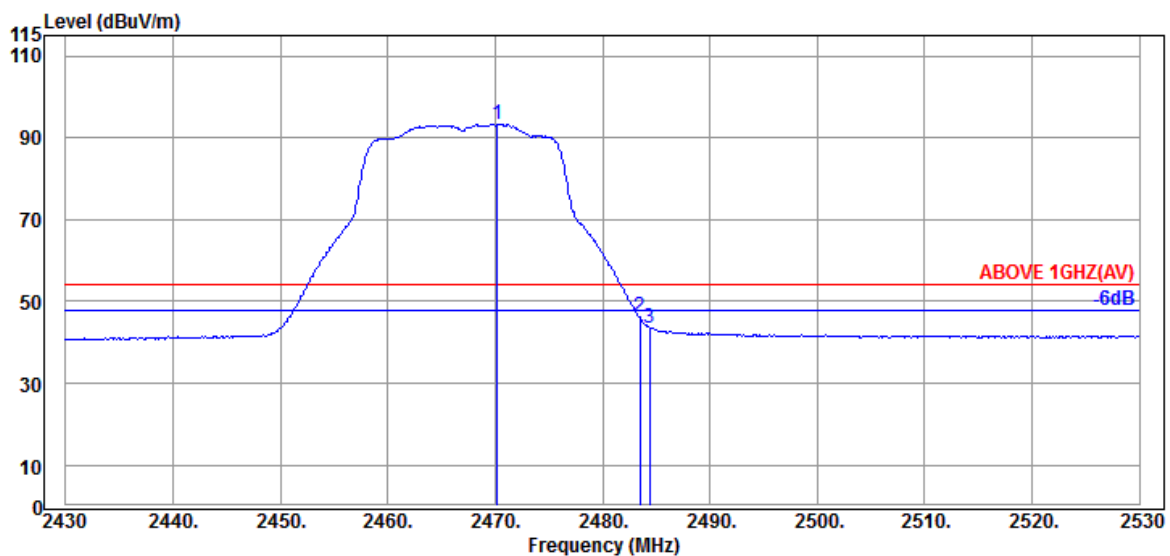


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	28.44	5.85	39.92	99.01	93.38	---	---	Average
2483.500	28.47	5.87	39.92	51.70	46.12	54.00	7.88	Average
2484.400	28.47	5.87	39.92	49.08	43.50	54.00	10.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

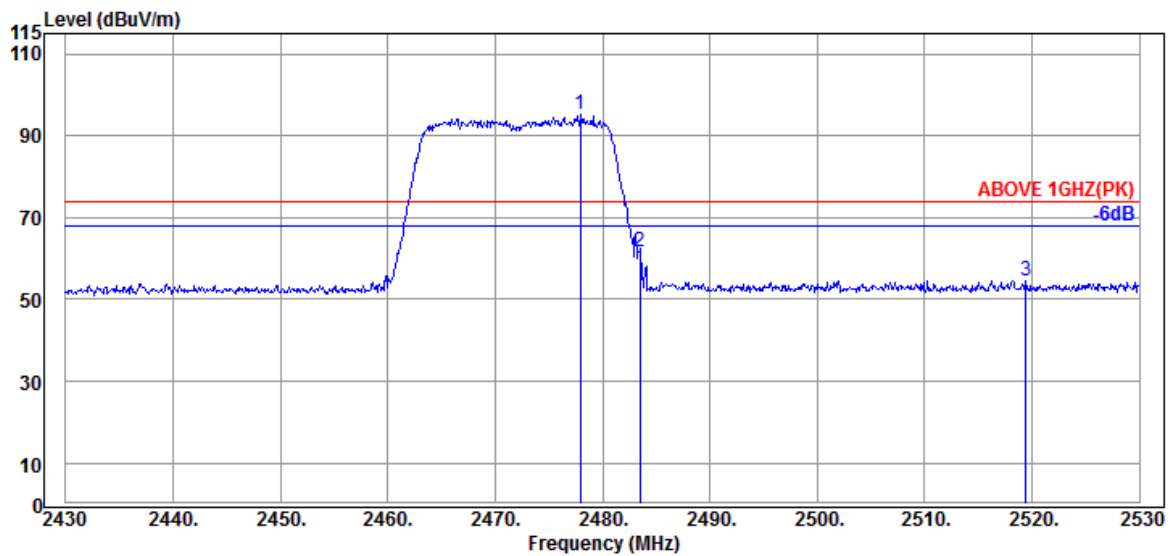

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.900	28.46	5.86	39.92	100.74	95.14	---	---	Peak
2483.500	28.47	5.87	39.92	67.28	61.70	74.00	12.30	Peak
2519.400	28.59	5.94	39.93	59.90	54.50	74.00	19.50	Peak

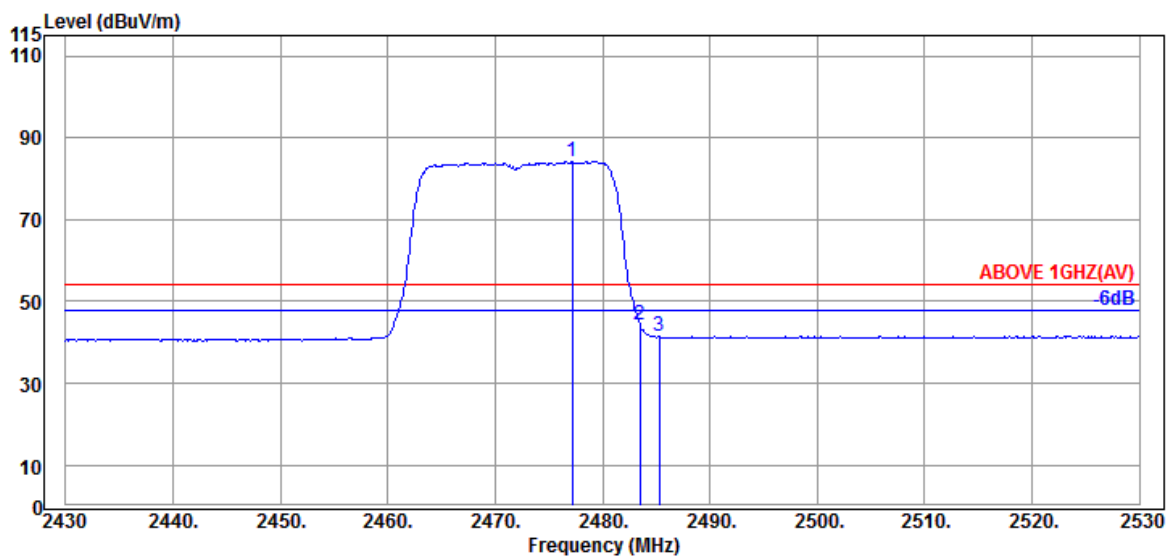


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.200	28.46	5.86	39.92	89.86	84.26	---	---	Average
2483.500	28.47	5.87	39.92	49.91	44.33	54.00	9.67	Average
2485.300	28.47	5.87	39.92	47.14	41.56	54.00	12.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

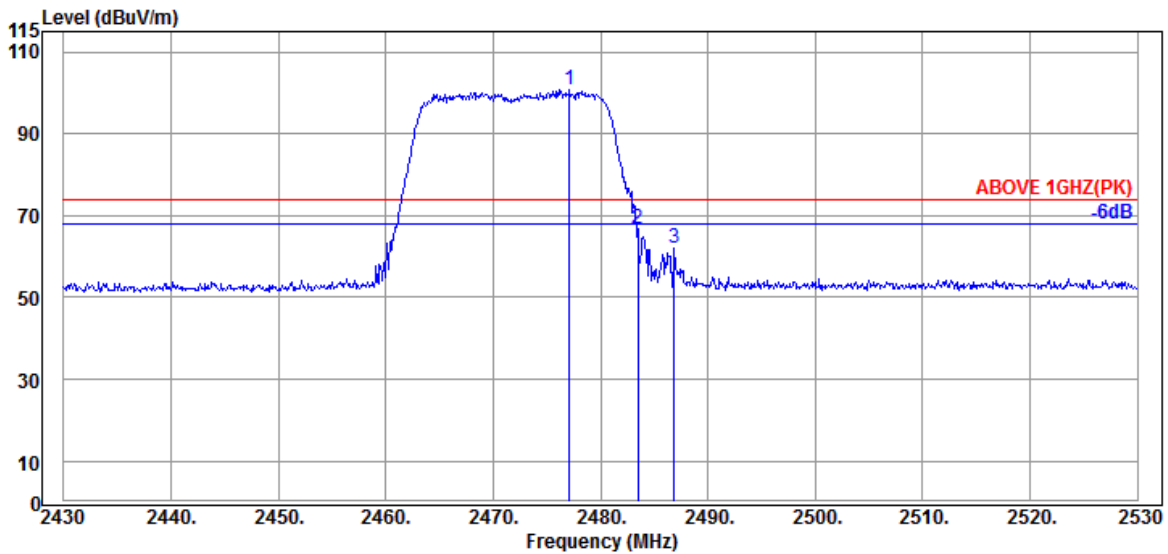

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.100	28.46	5.86	39.92	106.23	100.63	---	---	Peak
2483.500	28.47	5.87	39.92	72.20	66.62	74.00	7.38	Peak
2486.900	28.47	5.87	39.92	67.58	62.00	74.00	12.00	Peak

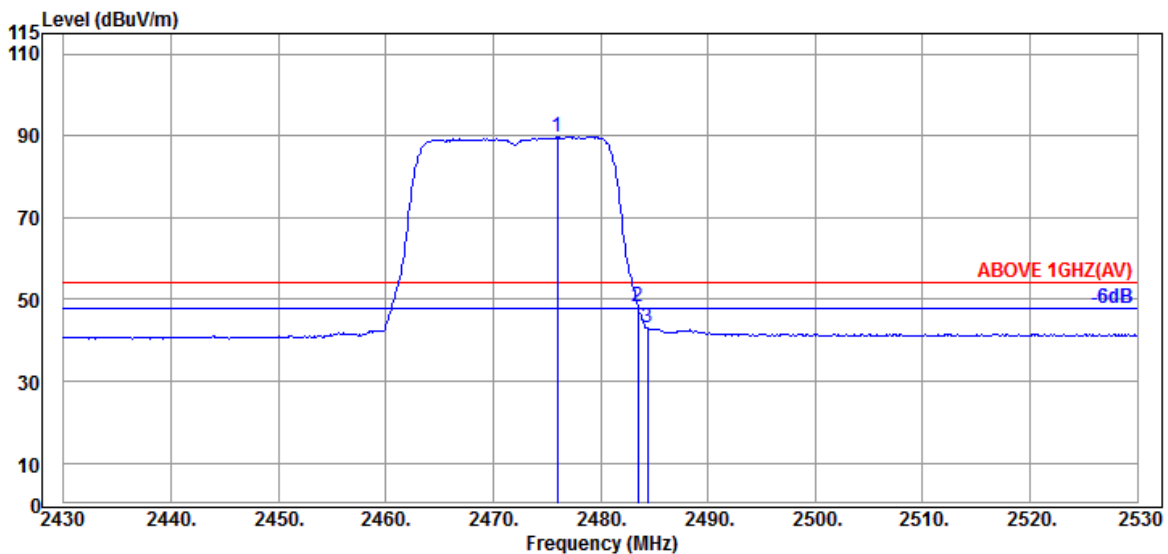


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.46	5.86	39.92	95.34	89.74	---	---	Average
2483.500	28.47	5.87	39.92	53.99	48.41	54.00	5.59	Average
2484.400	28.47	5.87	39.92	48.59	43.01	54.00	10.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

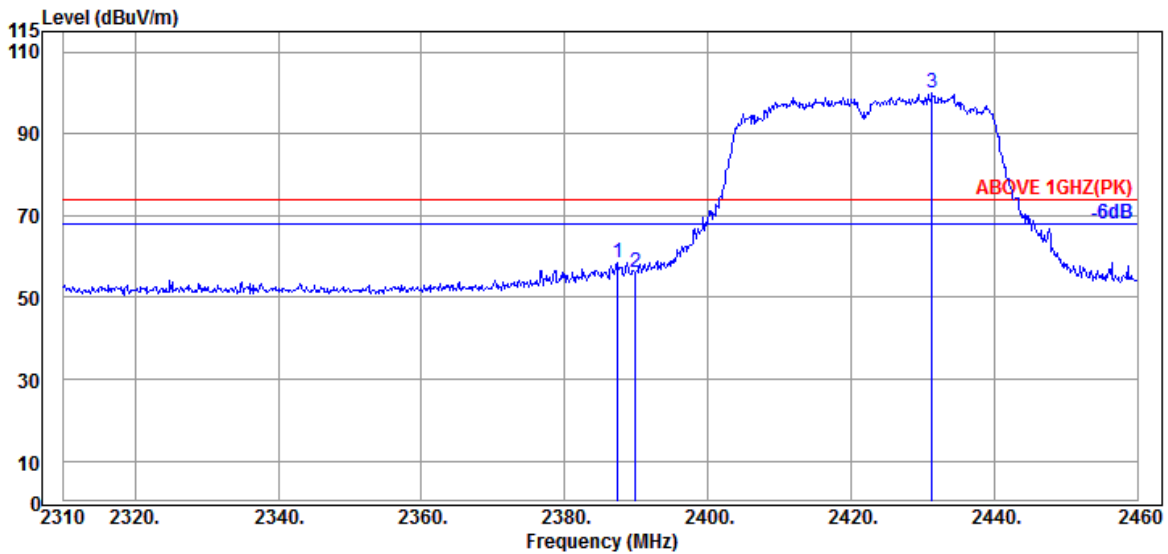

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2387.400	28.20	5.72	39.93	64.63	58.62	74.00	15.38	Peak
2389.950	28.20	5.72	39.93	62.18	56.17	74.00	17.83	Peak
@ 2431.350	28.31	5.78	39.93	105.64	99.80	---	---	Peak

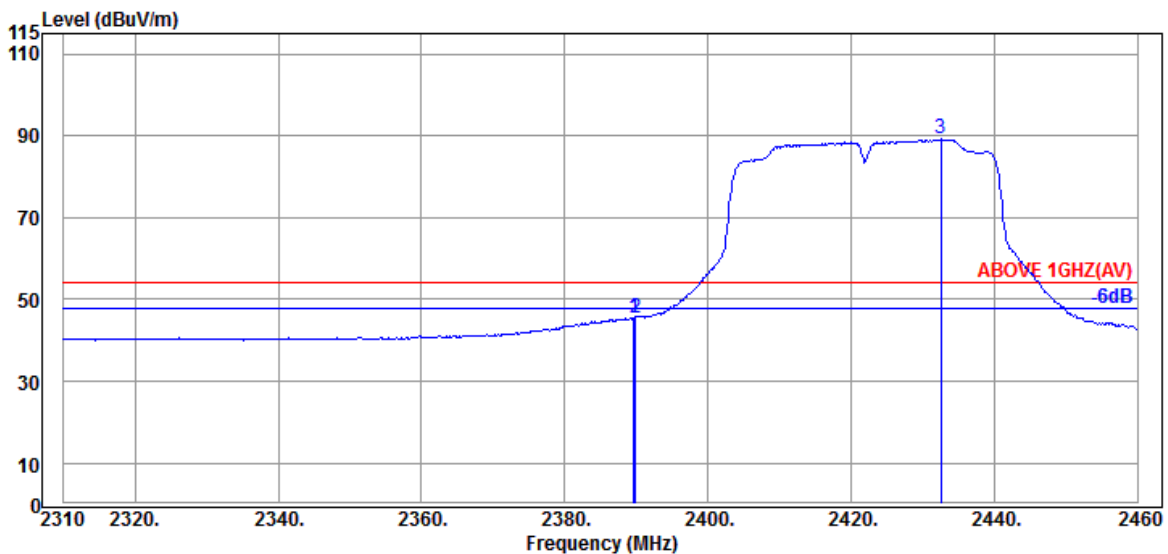


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.72	39.93	51.50	45.49	54.00	8.51	Average
2389.950	28.20	5.72	39.93	51.59	45.58	54.00	8.42	Average
@ 2432.550	28.34	5.79	39.93	94.95	89.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

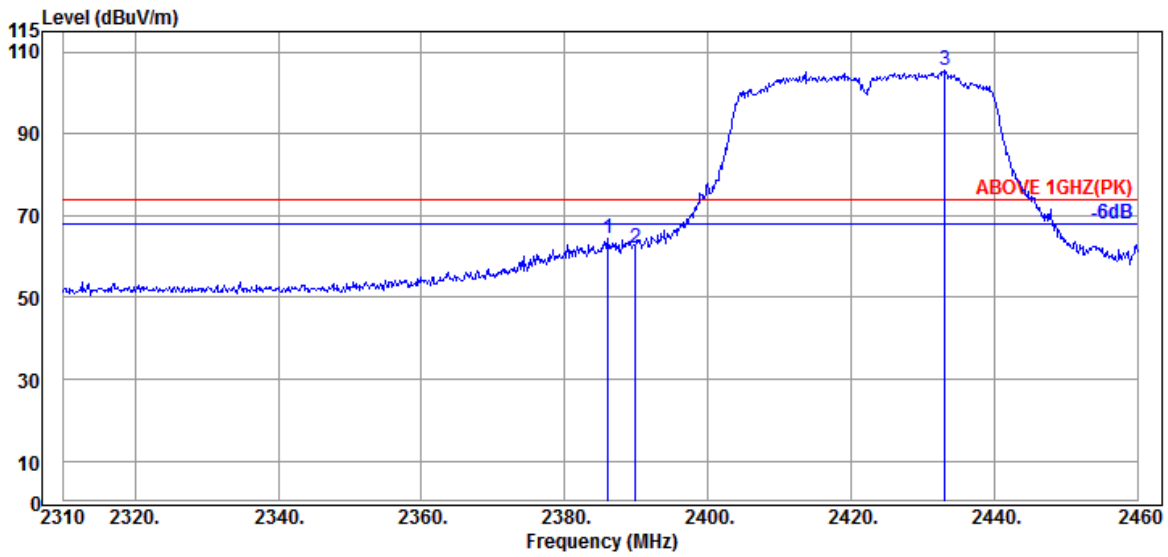

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.050	28.20	5.72	39.93	70.31	64.30	74.00	9.70	Peak
2389.950	28.20	5.72	39.93	68.13	62.12	74.00	11.88	Peak
@ 2433.150	28.34	5.79	39.93	111.46	105.66	---	---	Peak

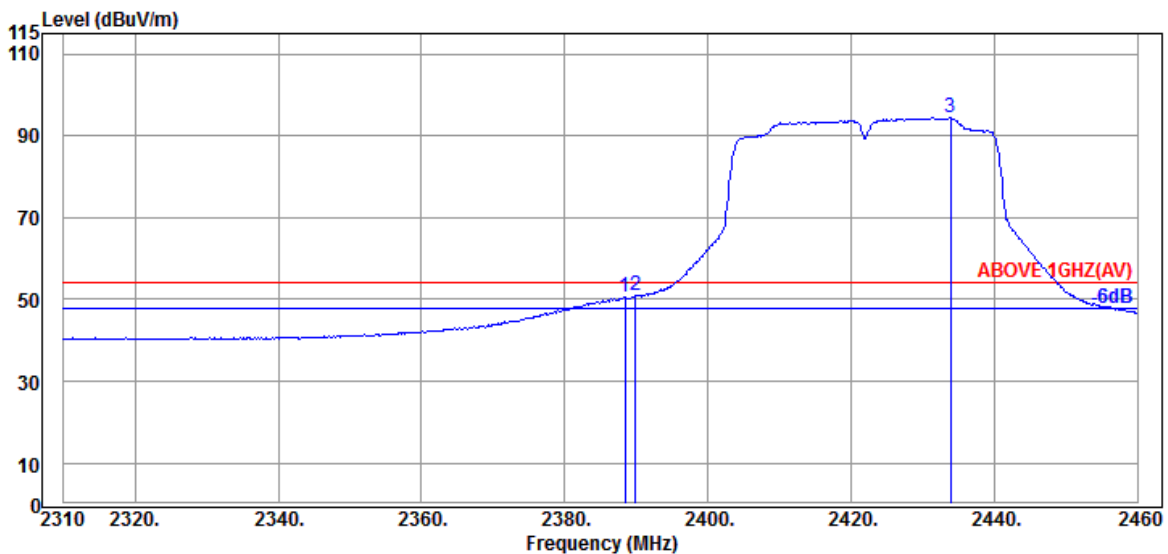


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.450	28.20	5.72	39.93	56.56	50.55	54.00	3.45	Average
2389.950	28.20	5.72	39.93	56.92	50.91	54.00	3.09	Average
@ 2433.900	28.34	5.79	39.93	100.28	94.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

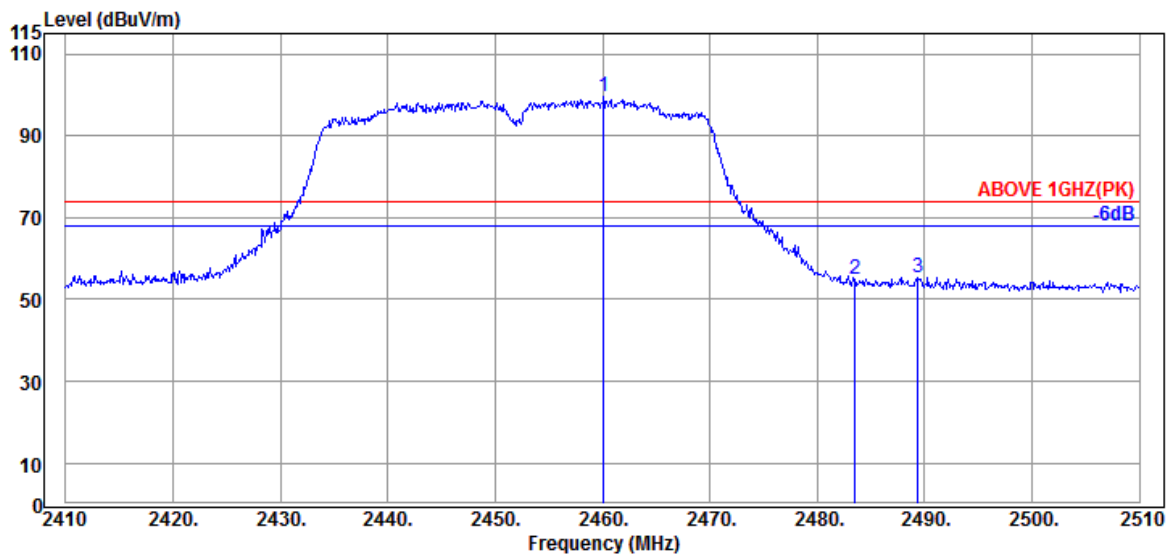

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.41	5.83	39.92	105.26	99.58	---	---	Peak
2483.500	28.47	5.87	39.92	60.53	54.95	74.00	19.05	Peak
2489.400	28.49	5.88	39.92	60.97	55.42	74.00	18.58	Peak

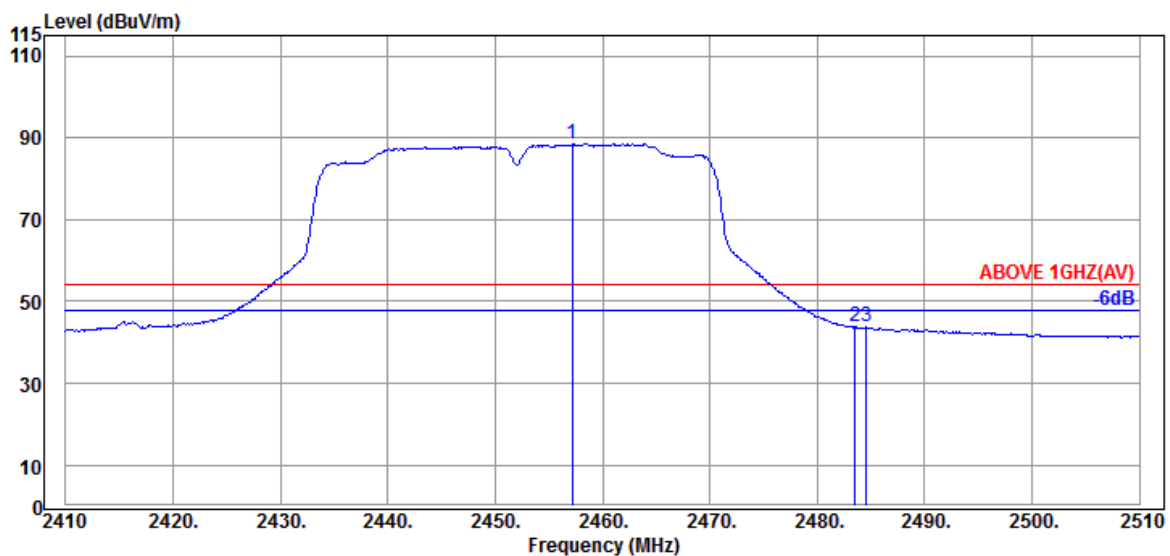


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.200	28.41	5.83	39.92	94.13	88.45	---	---	Average
2483.500	28.47	5.87	39.92	49.43	43.85	54.00	10.15	Average
2484.600	28.47	5.87	39.92	49.25	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

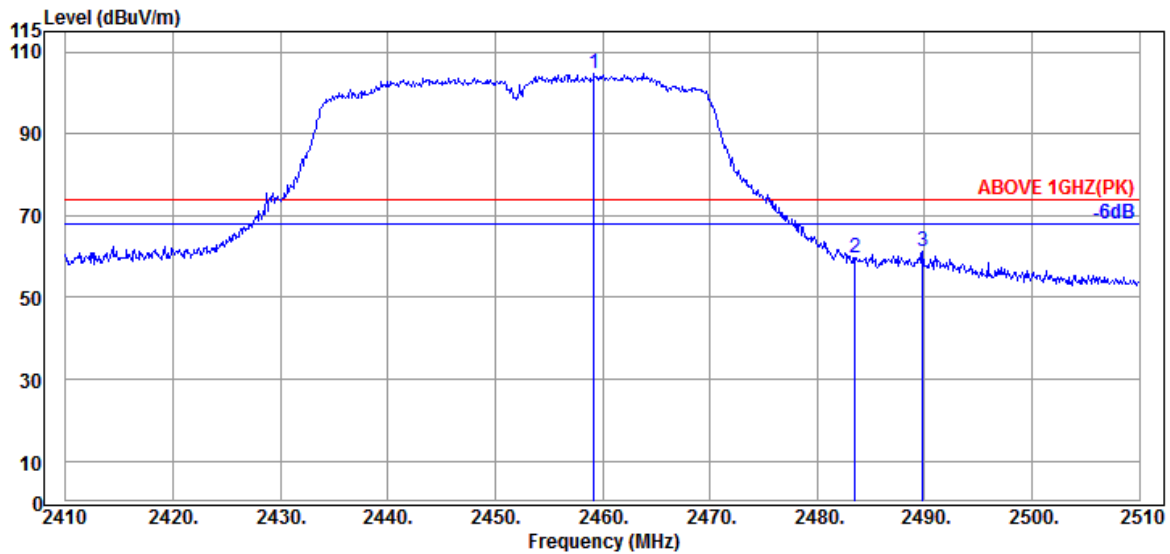

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.41	5.83	39.92	110.60	104.92	---	---	Peak
2483.500	28.47	5.87	39.92	65.15	59.57	74.00	14.43	Peak
2489.800	28.49	5.88	39.92	66.74	61.19	74.00	12.81	Peak

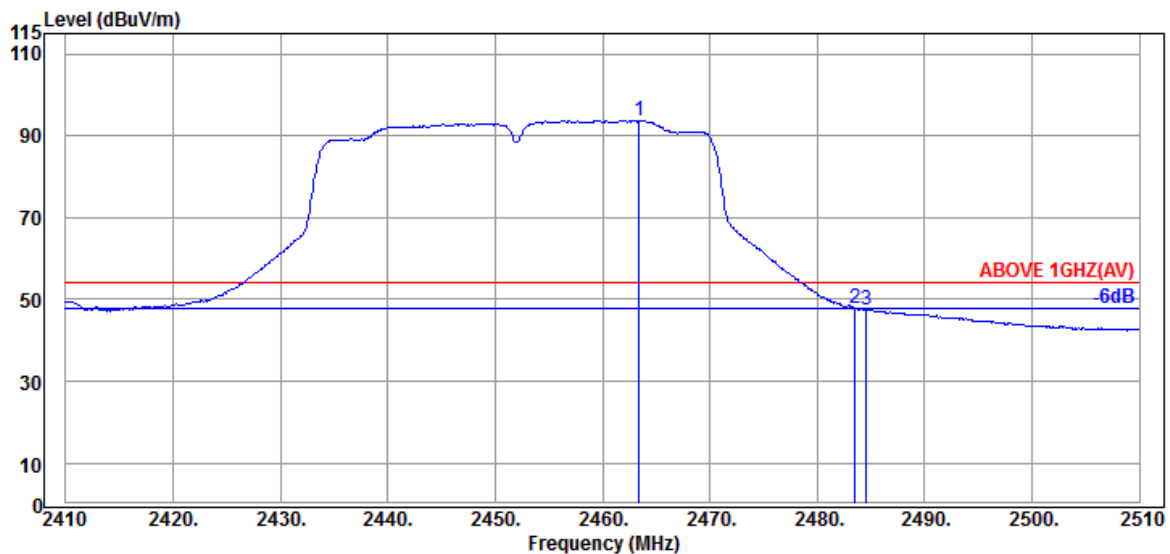


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	5.84	39.92	99.38	93.73	---	---	Average
2483.500	28.47	5.87	39.92	53.29	47.71	54.00	6.29	Average
2484.600	28.47	5.87	39.92	53.11	47.53	54.00	6.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

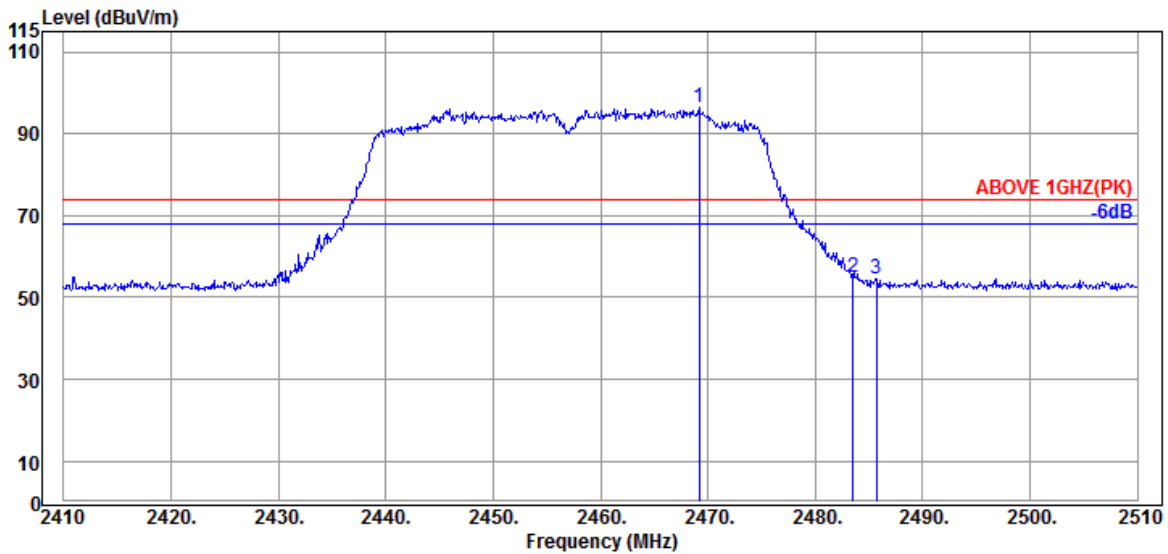

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.44	5.85	39.92	102.05	96.42	---	---	Peak
2483.500	28.47	5.87	39.92	60.49	54.91	74.00	19.09	Peak
2485.700	28.47	5.87	39.92	60.30	54.72	74.00	19.28	Peak

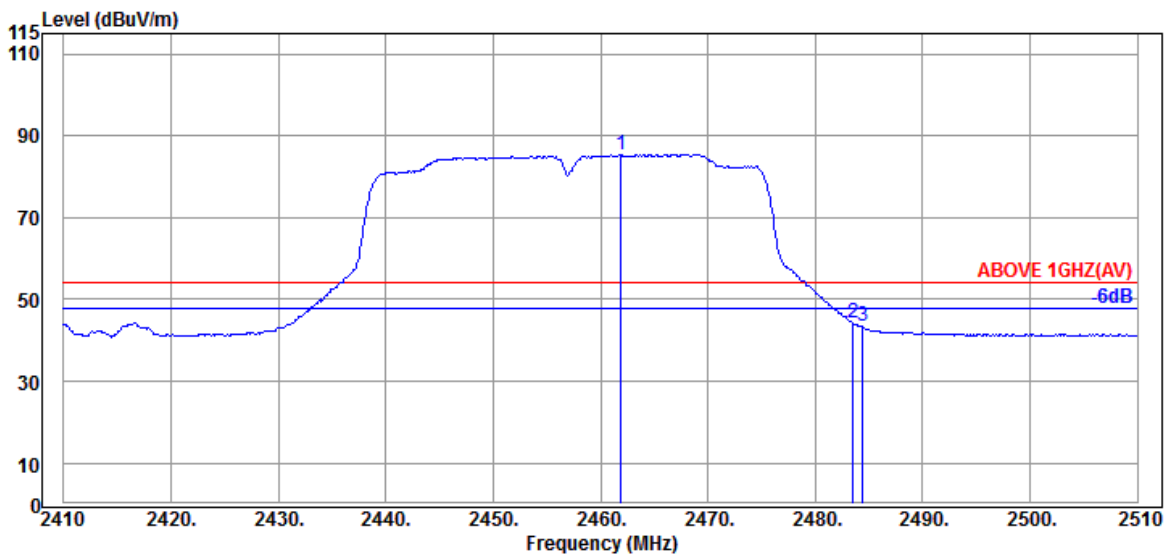


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.900	28.43	5.84	39.92	91.11	85.46	---	---	Average
2483.500	28.47	5.87	39.92	49.97	44.39	54.00	9.61	Average
2484.400	28.47	5.87	39.92	49.00	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

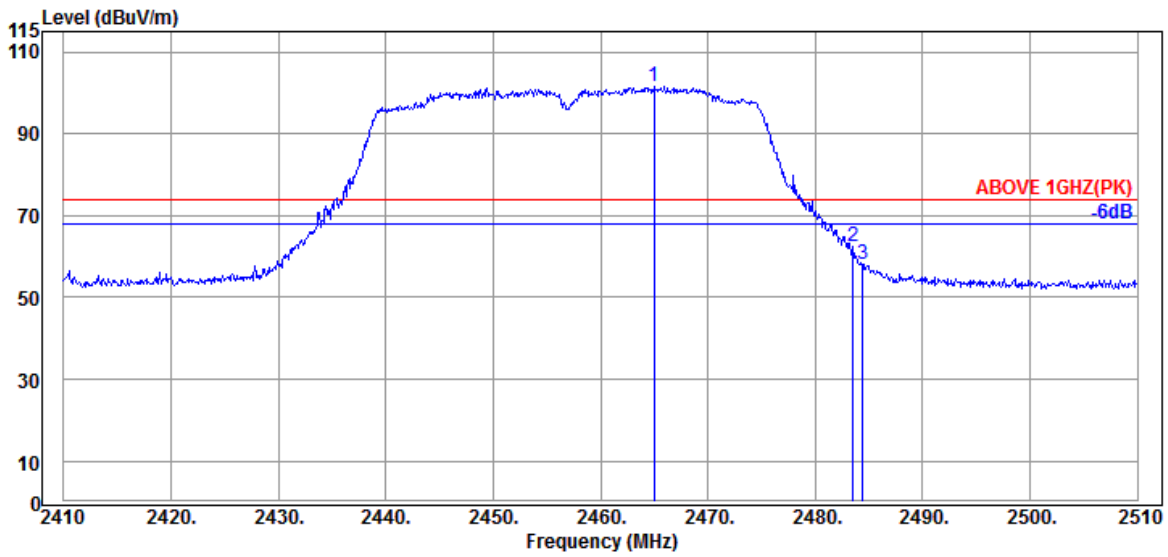

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	5.84	39.92	107.33	101.68	---	---	Peak
2483.500	28.47	5.87	39.92	67.92	62.34	74.00	11.66	Peak
2484.400	28.47	5.87	39.92	63.73	58.15	74.00	15.85	Peak

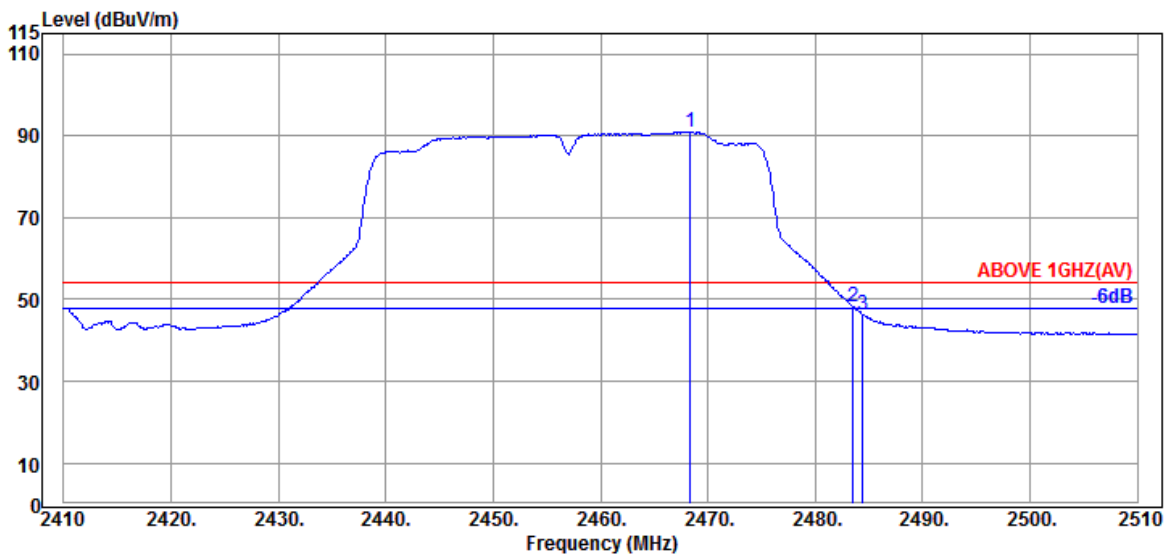


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.400	28.44	5.85	39.92	96.67	91.04	---	---	Average
2483.500	28.47	5.87	39.92	53.84	48.26	54.00	5.74	Average
2484.400	28.47	5.87	39.92	52.01	46.43	54.00	7.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

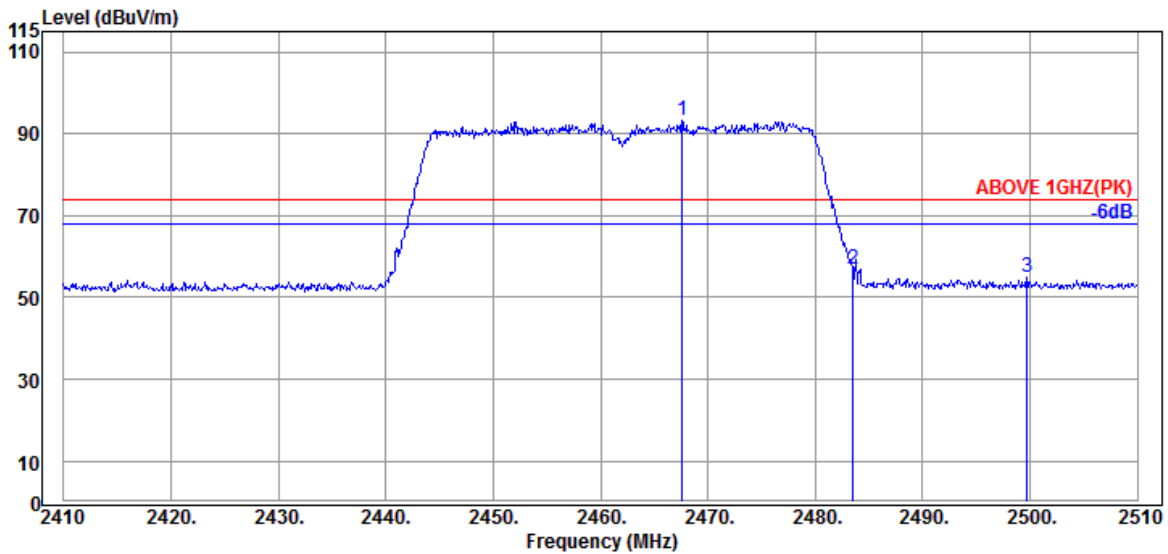

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.44	5.85	39.92	99.07	93.44	---	---	Peak
2483.500	28.47	5.87	39.92	62.45	56.87	74.00	17.13	Peak
2499.700	28.50	5.89	39.92	60.33	54.80	74.00	19.20	Peak

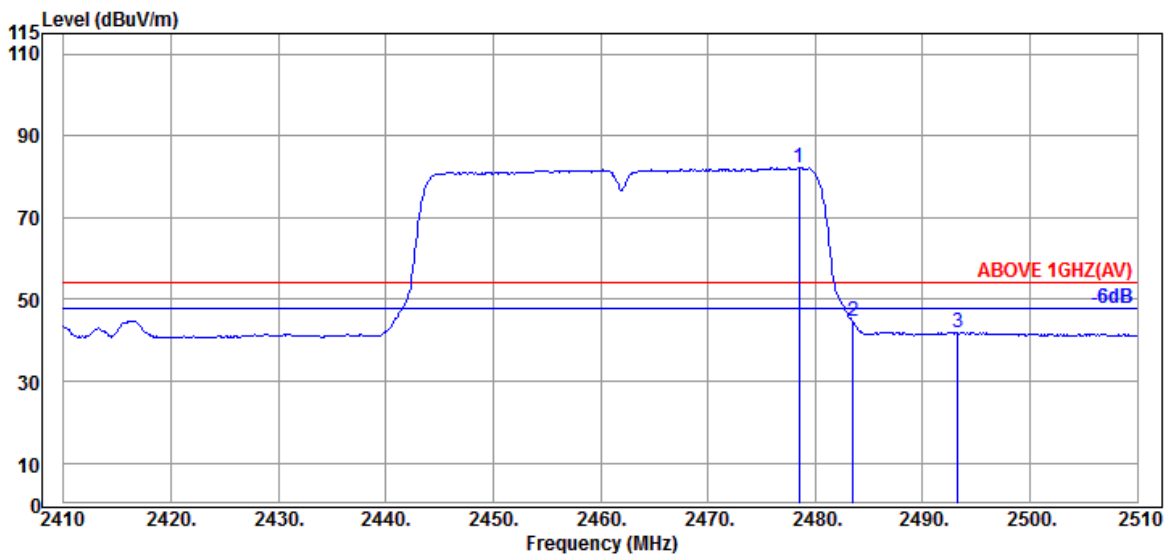


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.46	5.86	39.92	87.87	82.27	---	---	Average
2483.500	28.47	5.87	39.92	50.23	44.65	54.00	9.35	Average
2493.300	28.49	5.88	39.92	47.59	42.04	54.00	11.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

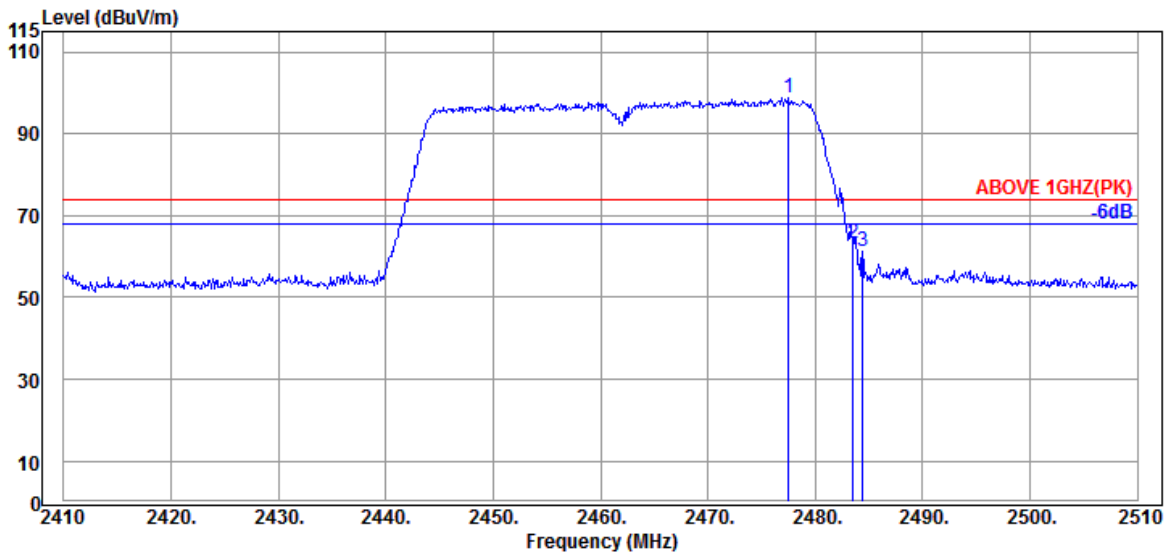

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.46	5.86	39.92	104.37	98.77	---	---	Peak
2483.500	28.47	5.87	39.92	68.96	63.38	74.00	10.62	Peak
2484.400	28.47	5.87	39.92	66.82	61.24	74.00	12.76	Peak

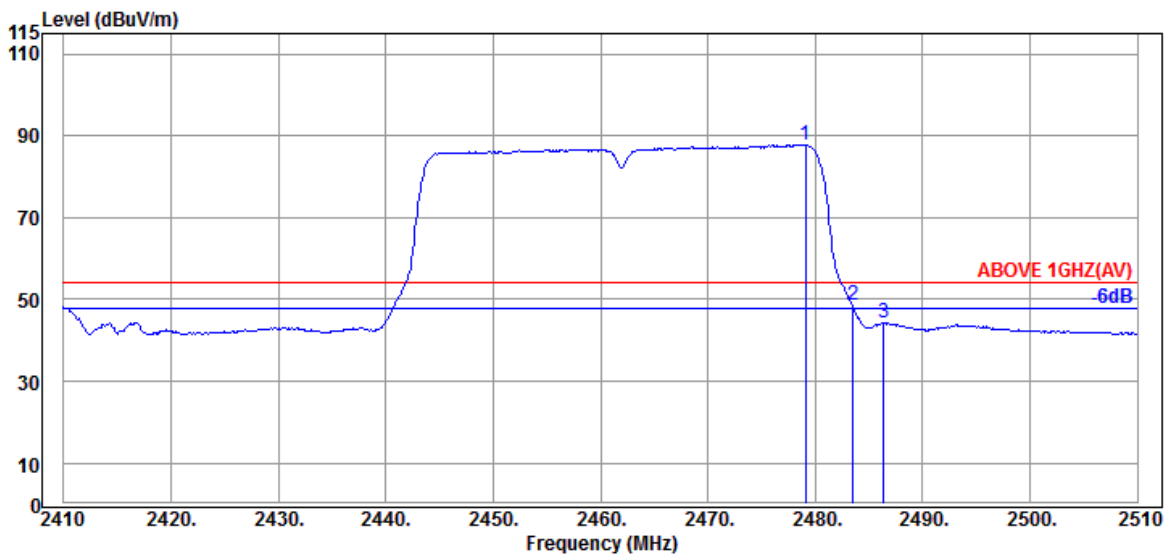


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	5.86	39.92	93.39	87.79	---	---	Average
2483.500	28.47	5.87	39.92	54.04	48.46	54.00	5.54	Average
2486.400	28.47	5.87	39.92	49.88	44.30	54.00	9.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

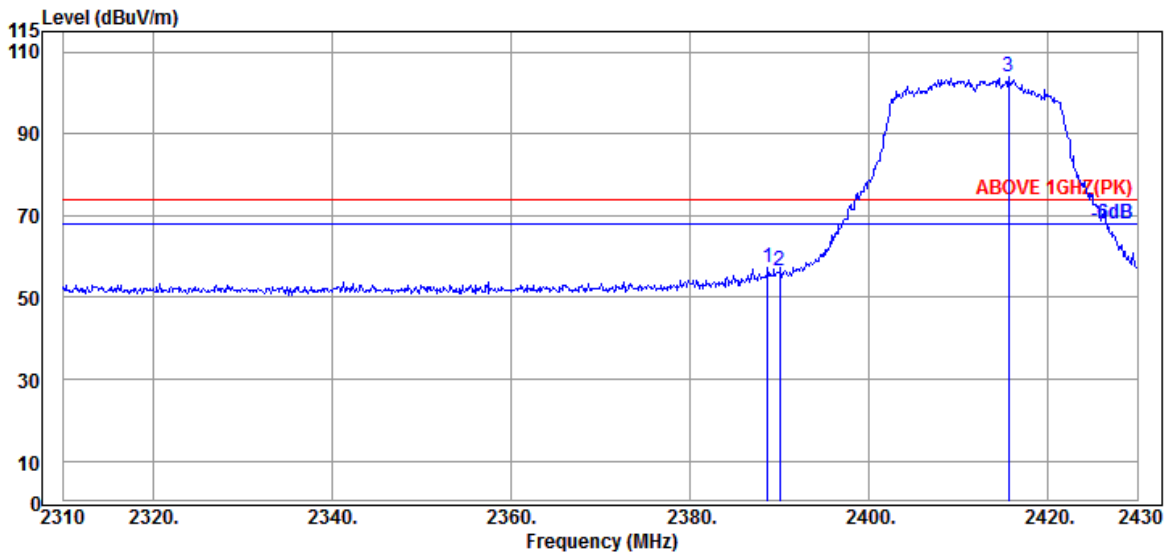

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.20	5.72	39.93	63.15	57.14	74.00	16.86	Peak
2390.040	28.20	5.72	39.93	62.69	56.68	74.00	17.32	Peak
@ 2415.600	28.26	5.76	39.93	109.76	103.85	---	---	Peak

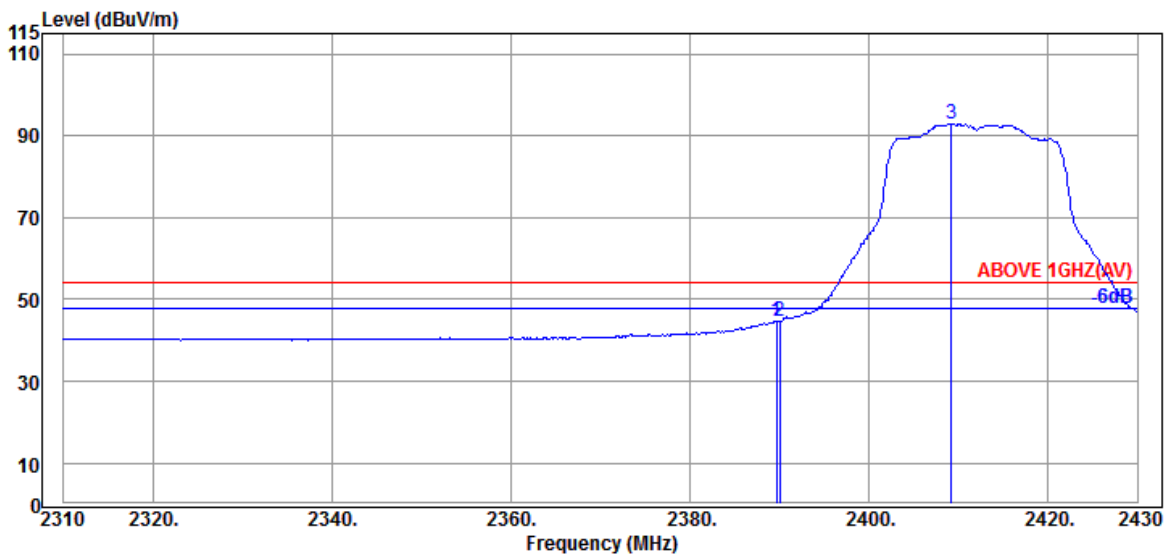


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	50.72	44.71	54.00	9.29	Average
2390.040	28.20	5.72	39.93	50.59	44.58	54.00	9.42	Average
@ 2409.240	28.23	5.75	39.93	98.83	92.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

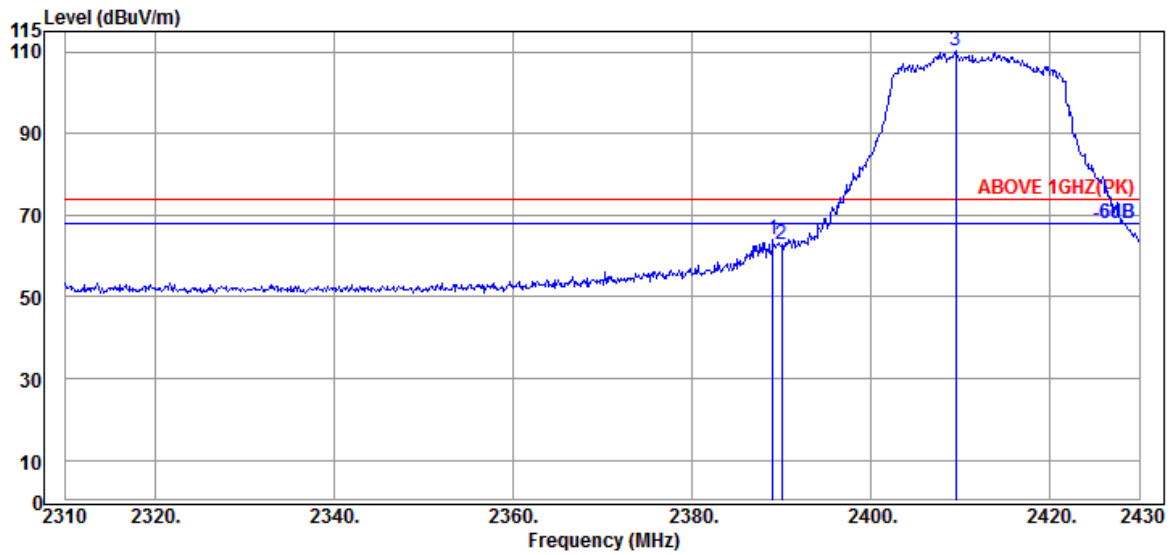

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.20	5.72	39.93	70.03	64.02	74.00	9.98	Peak
2390.040	28.20	5.72	39.93	68.75	62.74	74.00	11.26	Peak
@ 2409.480	28.23	5.75	39.93	116.27	110.32	---	---	Peak

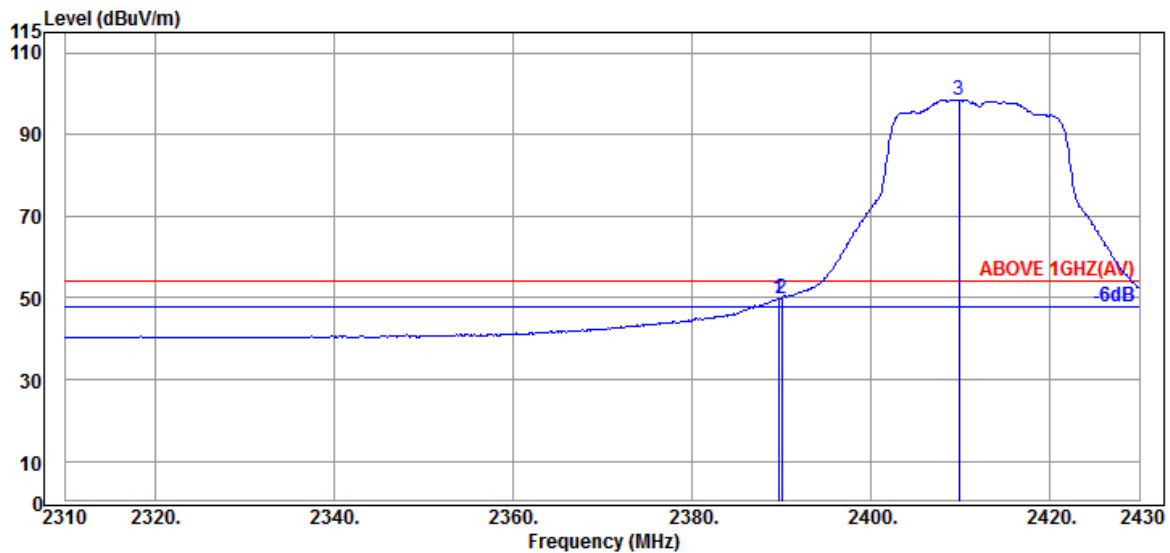


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	55.88	49.87	54.00	4.13	Average
2390.040	28.20	5.72	39.93	55.86	49.85	54.00	4.15	Average
@ 2409.840	28.23	5.75	39.93	104.39	98.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

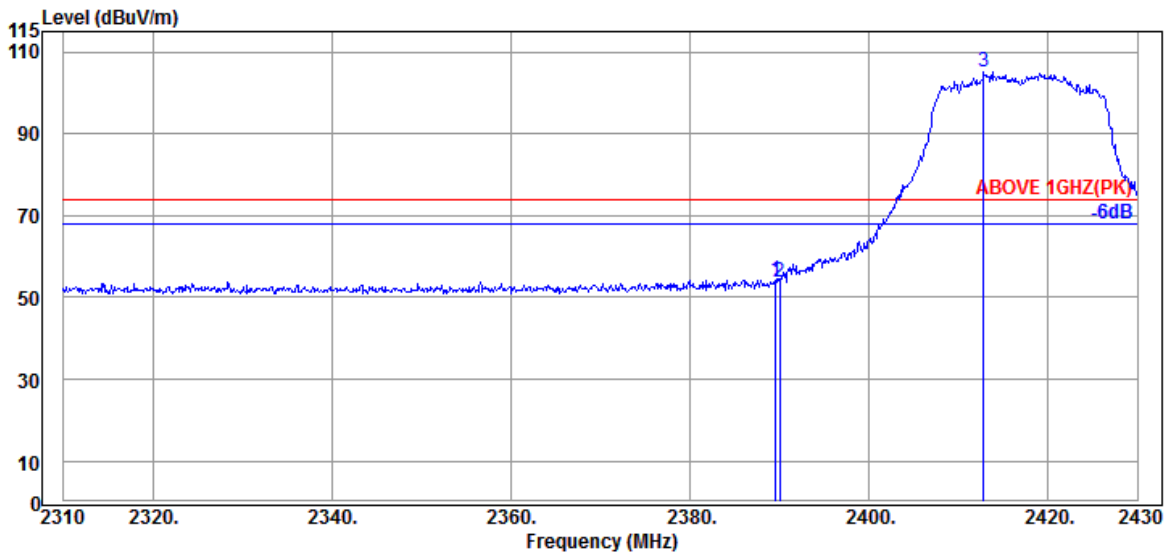

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.93	60.22	54.21	74.00	19.79	Peak
2390.040	28.20	5.72	39.93	59.86	53.85	74.00	20.15	Peak
@ 2412.840	28.26	5.76	39.93	111.06	105.15	---	---	Peak

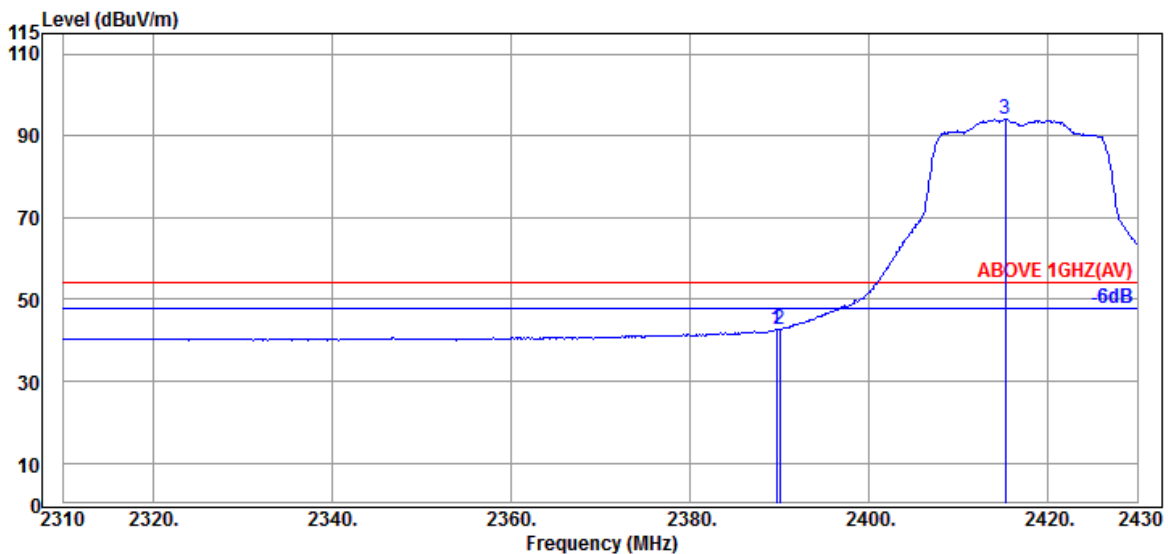


Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	48.73	42.72	54.00	11.28	Average
2390.040	28.20	5.72	39.93	48.71	42.70	54.00	11.30	Average
@ 2415.240	28.26	5.76	39.93	99.90	93.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

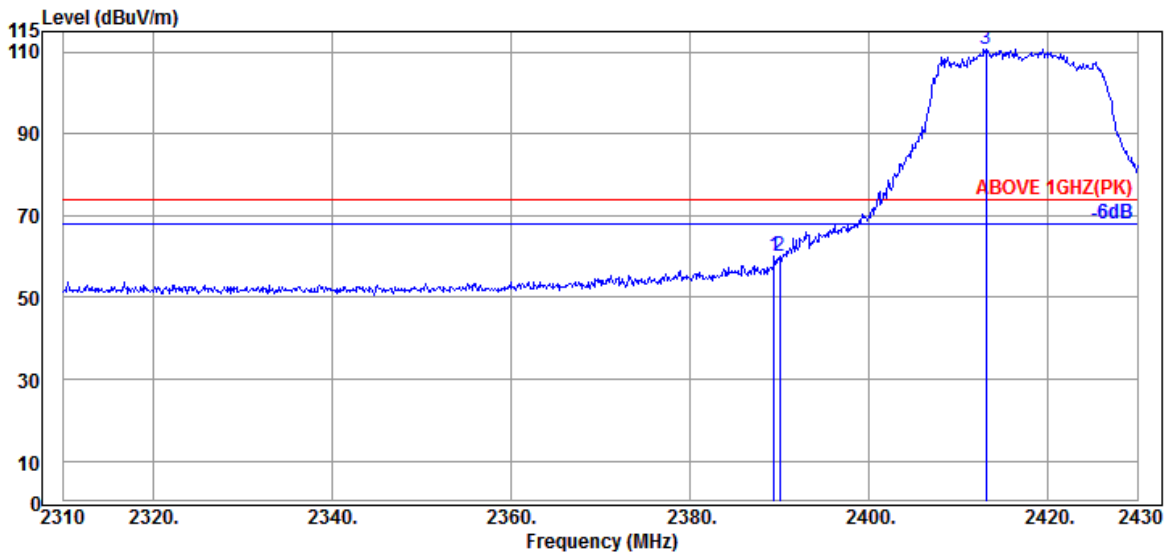
Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.20	5.72	39.93	66.24	60.23	74.00	13.77	Peak
2390.040	28.20	5.72	39.93	65.91	59.90	74.00	14.10	Peak
@ 2413.080	28.26	5.76	39.93	116.65	110.74	---	---	Peak

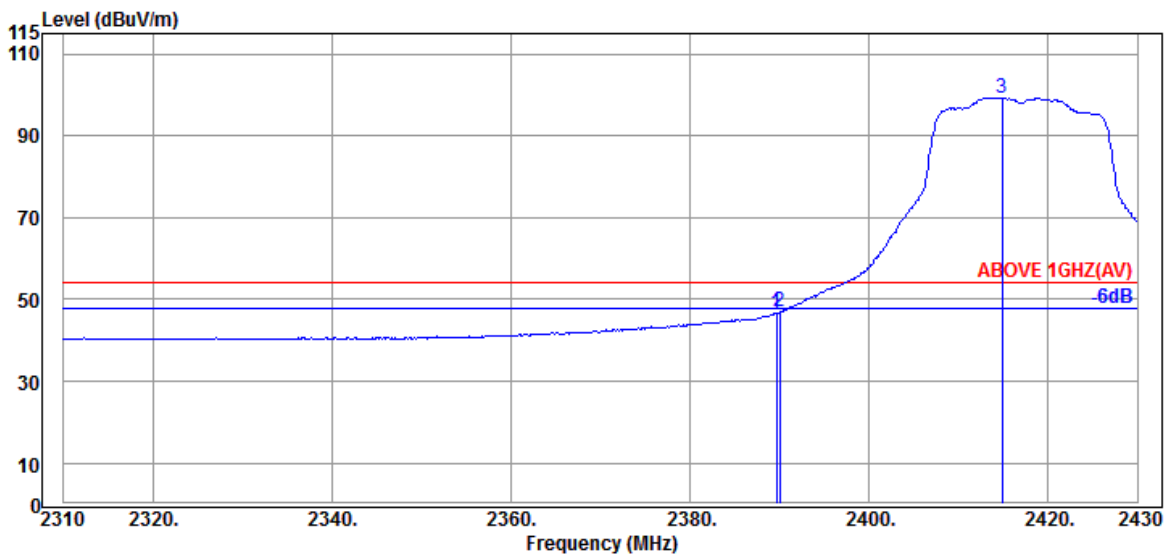
Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	52.66	46.65	54.00	7.35	Average
2390.040	28.20	5.72	39.93	52.87	46.86	54.00	7.14	Average
@ 2414.880	28.26	5.76	39.93	105.30	99.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

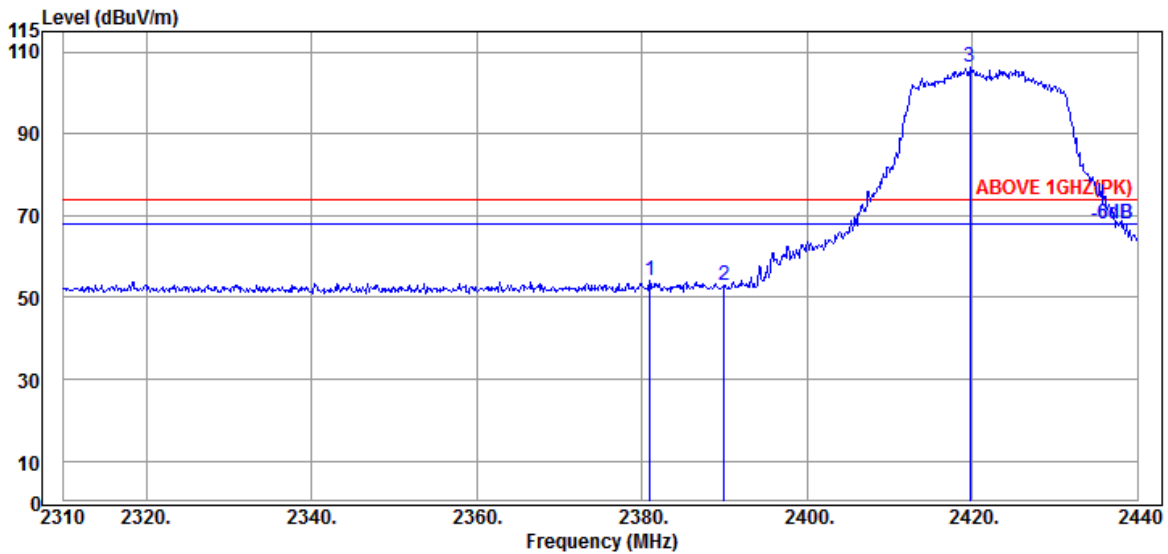

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.980	28.20	5.71	39.93	60.20	54.18	74.00	19.82	Peak
2389.950	28.20	5.72	39.93	58.86	52.85	74.00	21.15	Peak
@ 2419.720	28.29	5.77	39.93	112.06	106.19	---	---	Peak

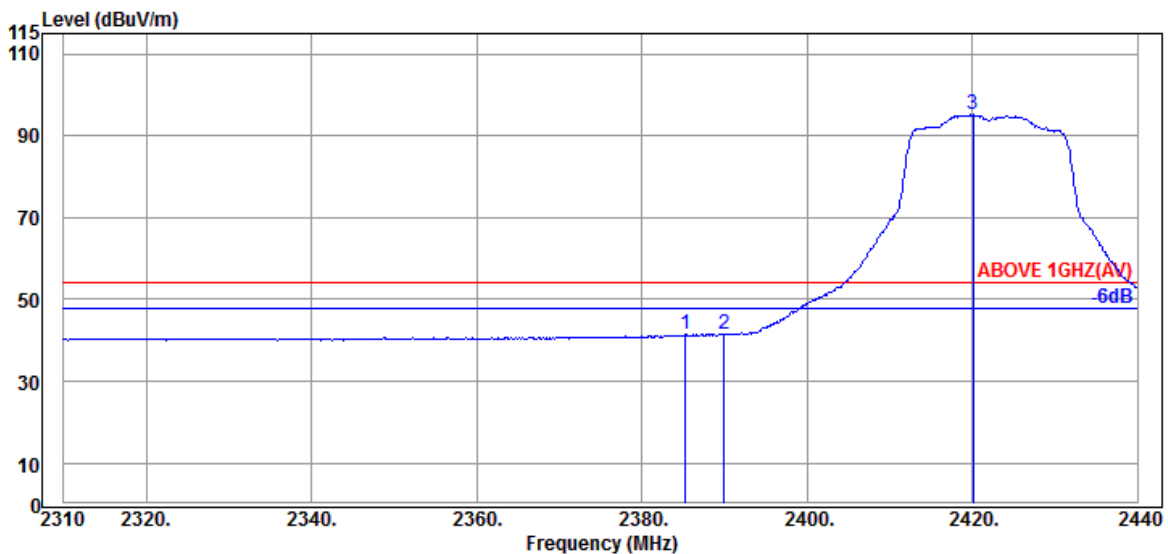


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.270	28.20	5.72	39.93	47.57	41.56	54.00	12.44	Average
2389.950	28.20	5.72	39.93	47.38	41.37	54.00	12.63	Average
@ 2420.110	28.29	5.77	39.93	100.97	95.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

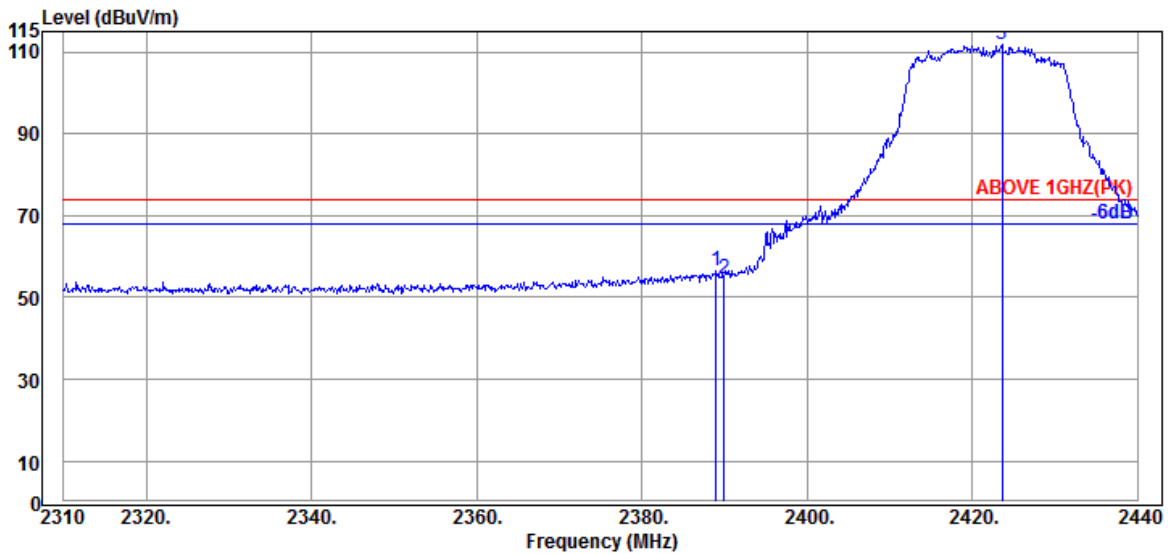

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.040	28.20	5.72	39.93	62.36	56.35	74.00	17.65	Peak
2389.950	28.20	5.72	39.93	60.59	54.58	74.00	19.42	Peak
@ 2423.620	28.29	5.77	39.93	117.59	111.72	---	---	Peak

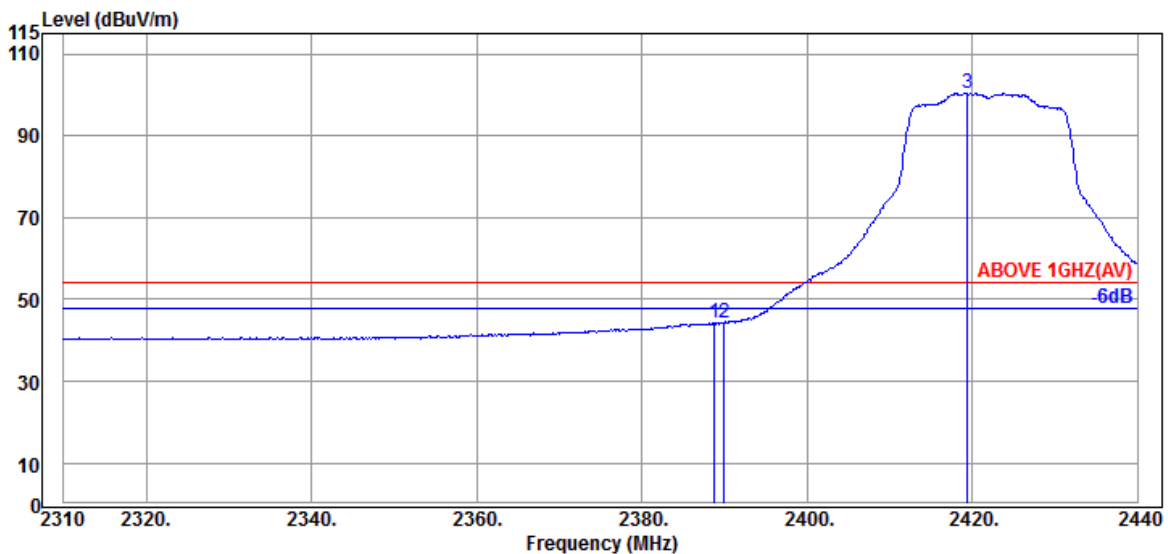


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.780	28.20	5.72	39.93	50.35	44.34	54.00	9.66	Average
2389.950	28.20	5.72	39.93	50.20	44.19	54.00	9.81	Average
@ 2419.460	28.29	5.77	39.93	106.26	100.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

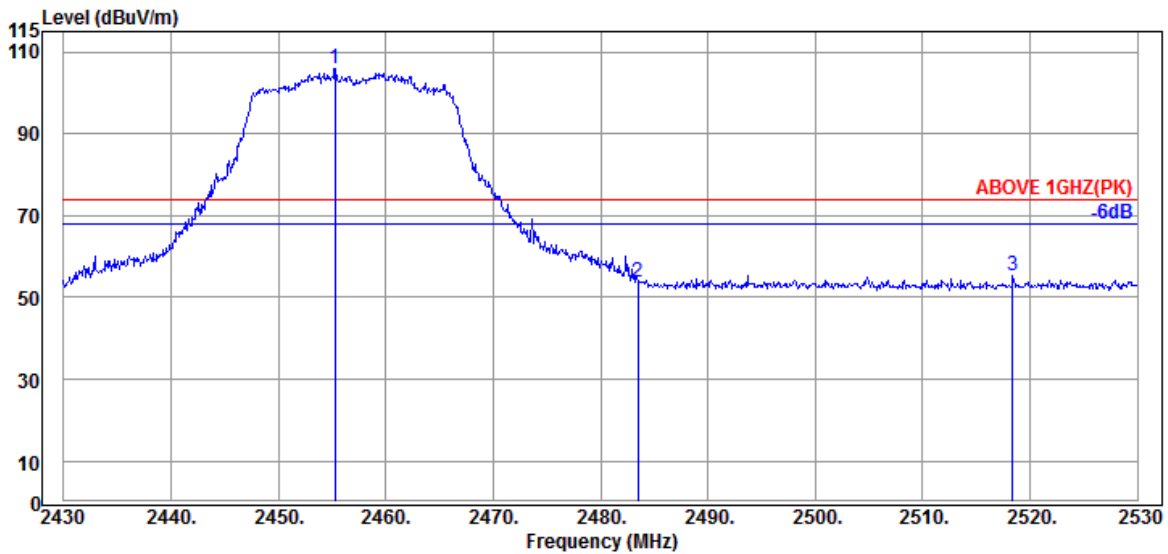

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.300	28.41	5.83	39.92	111.69	106.01	---	---	Peak
2483.500	28.47	5.87	39.92	59.49	53.91	74.00	20.09	Peak
2518.400	28.59	5.94	39.93	60.85	55.45	74.00	18.55	Peak

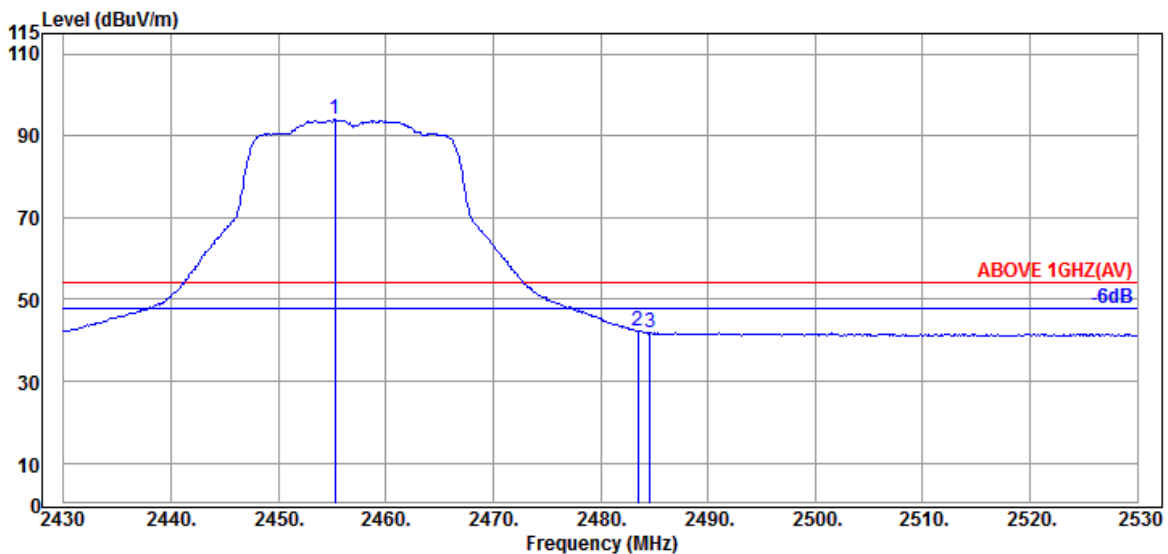


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.300	28.41	5.83	39.92	99.58	93.90	---	---	Average
2483.500	28.47	5.87	39.92	47.84	42.26	54.00	11.74	Average
2484.600	28.47	5.87	39.92	47.57	41.99	54.00	12.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

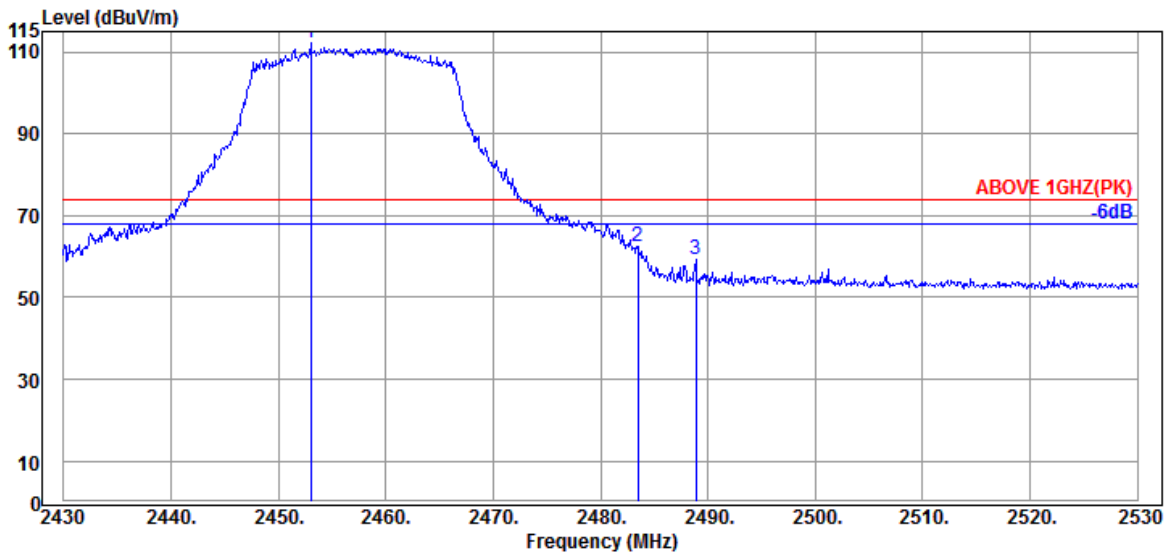

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	28.40	5.81	39.92	117.80	112.09	---	---	Peak
2483.500	28.47	5.87	39.92	68.06	62.48	74.00	11.52	Peak
2488.900	28.47	5.87	39.92	64.90	59.32	74.00	14.68	Peak

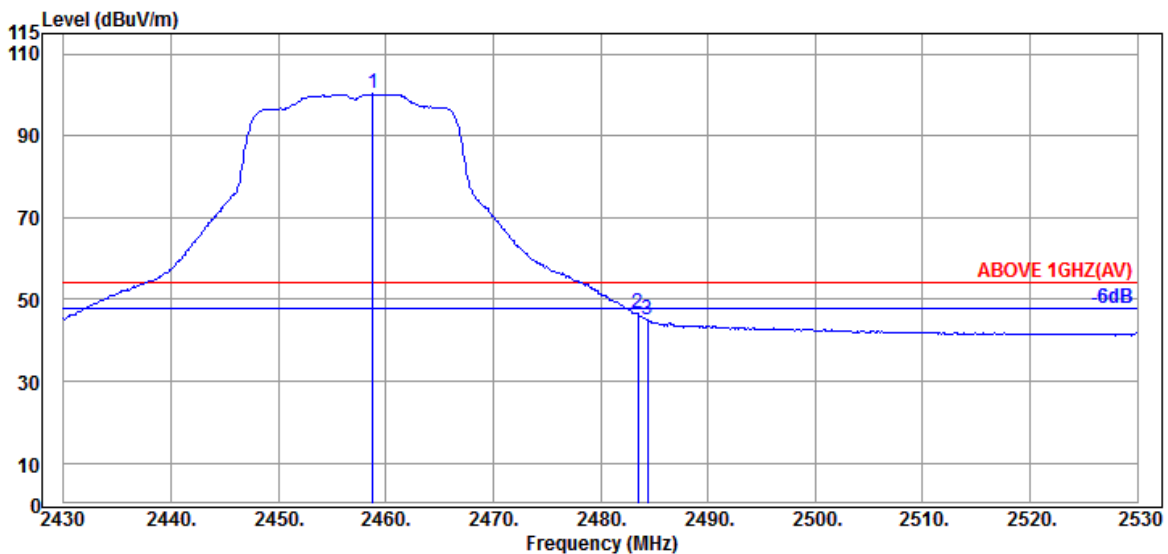


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.800	28.41	5.83	39.92	105.90	100.22	---	---	Average
2483.500	28.47	5.87	39.92	52.15	46.57	54.00	7.43	Average
2484.400	28.47	5.87	39.92	50.70	45.12	54.00	8.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

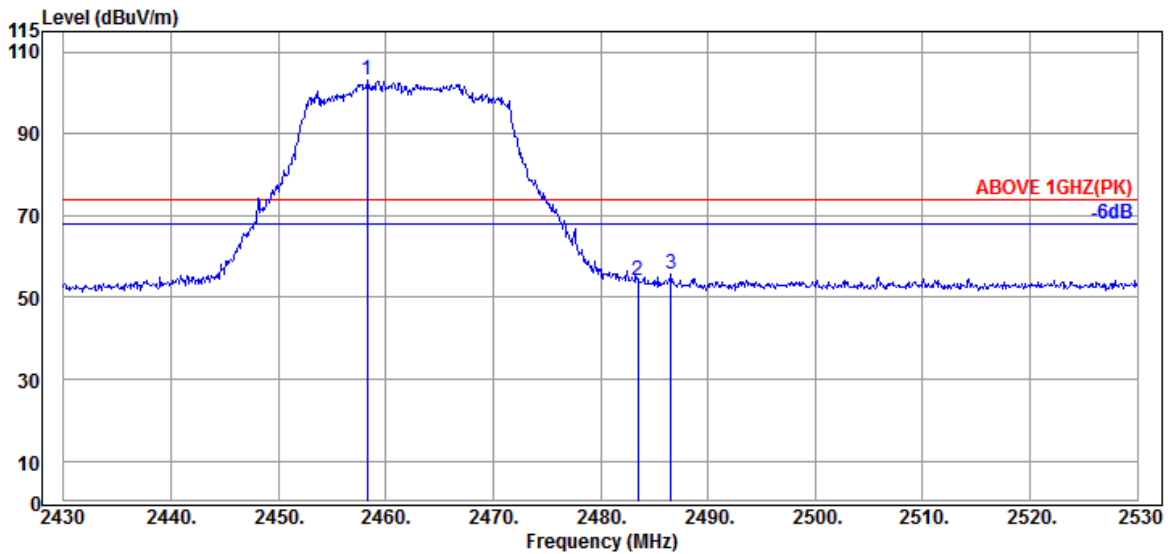

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	28.41	5.83	39.92	108.74	103.06	---	---	Peak
2483.500	28.47	5.87	39.92	59.87	54.29	74.00	19.71	Peak
2486.600	28.47	5.87	39.92	61.17	55.59	74.00	18.41	Peak

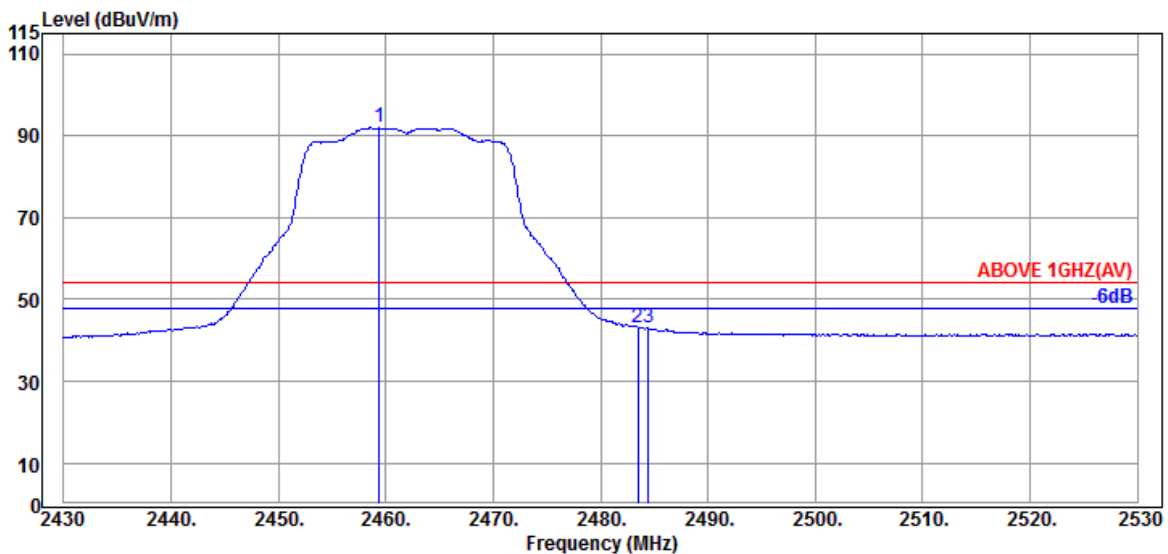


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	28.41	5.83	39.92	97.78	92.10	---	---	Average
2483.500	28.47	5.87	39.92	48.85	43.27	54.00	10.73	Average
2484.500	28.47	5.87	39.92	48.49	42.91	54.00	11.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

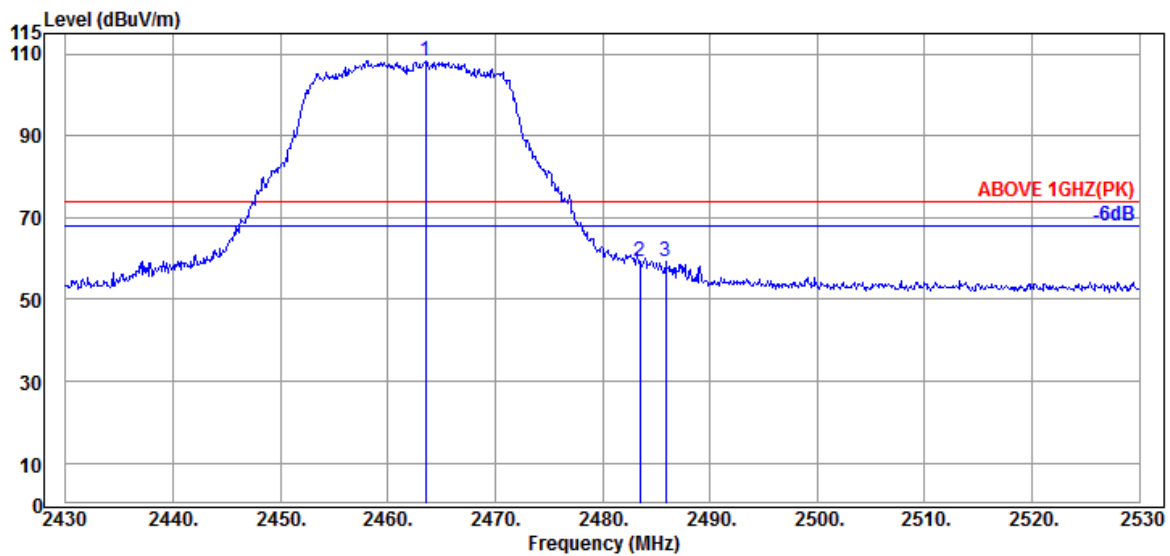

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	5.84	39.92	113.93	108.28	---	---	Peak
2483.500	28.47	5.87	39.92	64.97	59.39	74.00	14.61	Peak
2485.900	28.47	5.87	39.92	64.94	59.36	74.00	14.64	Peak

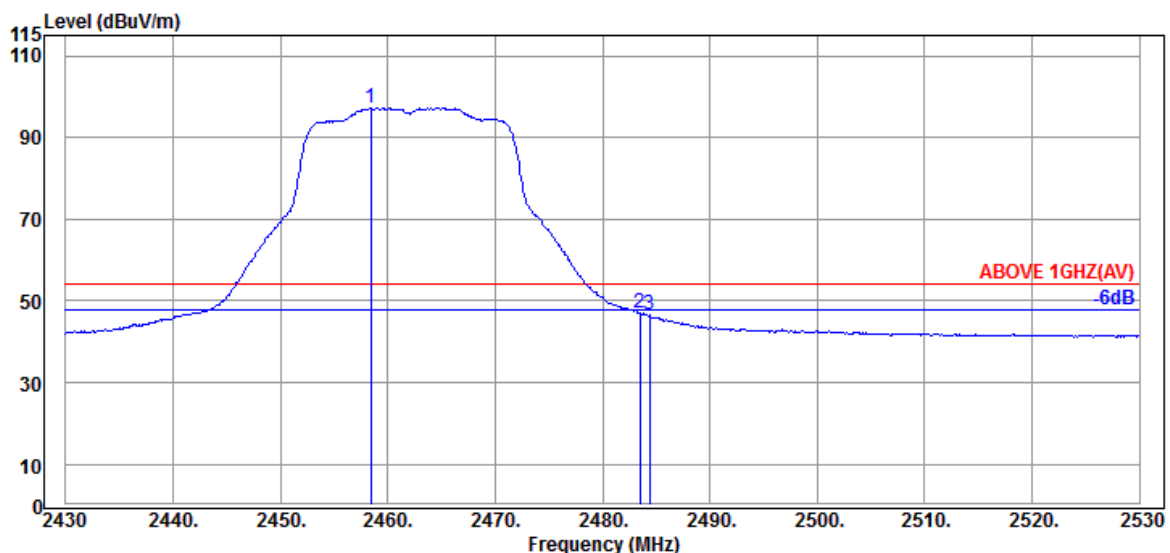


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	28.41	5.83	39.92	102.89	97.21	---	---	Average
2483.500	28.47	5.87	39.92	52.76	47.18	54.00	6.82	Average
2484.400	28.47	5.87	39.92	52.02	46.44	54.00	7.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

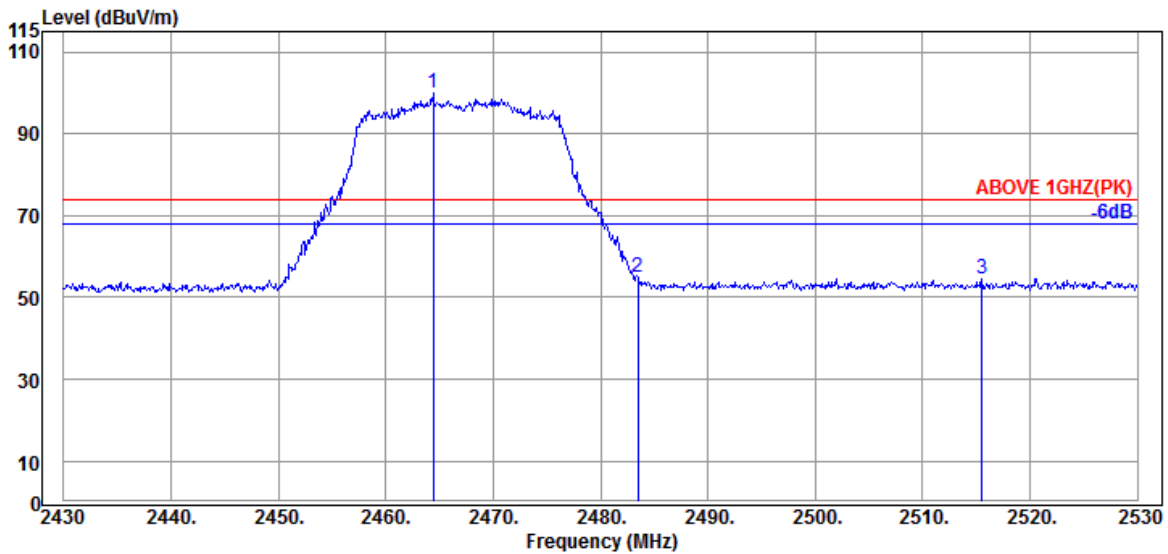

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.43	5.84	39.92	105.70	100.05	---	---	Peak
2483.500	28.47	5.87	39.92	60.70	55.12	74.00	18.88	Peak
2515.500	28.56	5.93	39.92	60.09	54.66	74.00	19.34	Peak

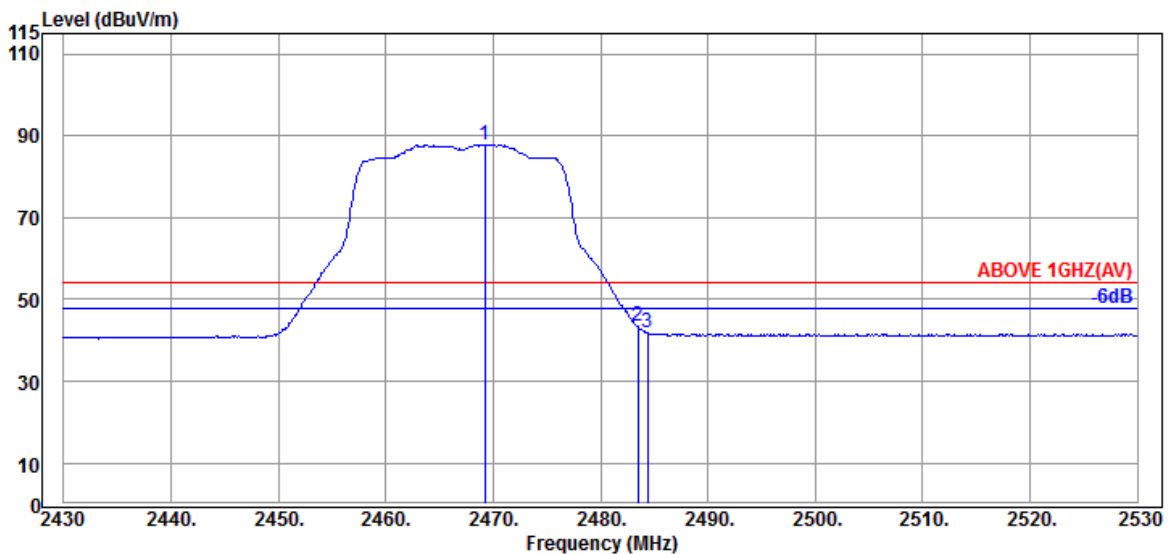


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.44	5.85	39.92	93.45	87.82	---	---	Average
2483.500	28.47	5.87	39.92	48.91	43.33	54.00	10.67	Average
2484.400	28.47	5.87	39.92	47.44	41.86	54.00	12.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

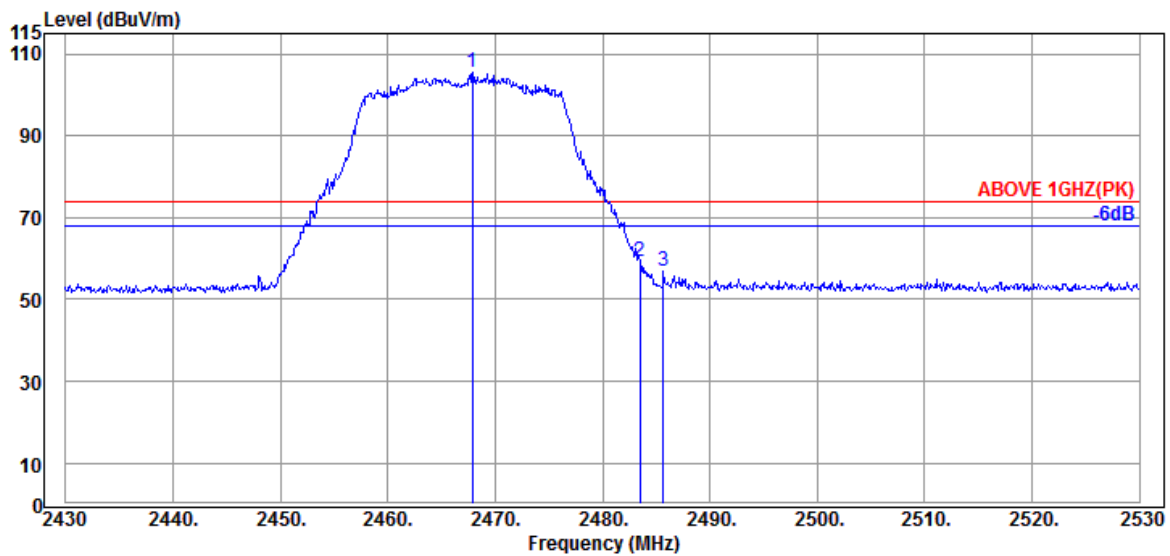

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.44	5.85	39.92	111.04	105.41	---	---	Peak
2483.500	28.47	5.87	39.92	64.86	59.28	74.00	14.72	Peak
2485.700	28.47	5.87	39.92	62.57	56.99	74.00	17.01	Peak

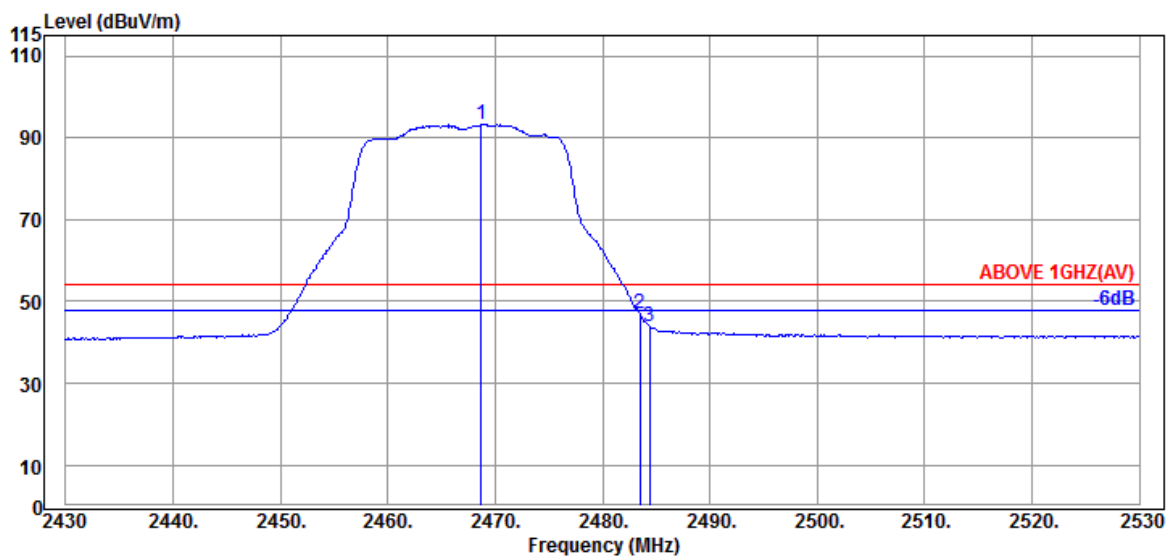


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.44	5.85	39.92	98.88	93.25	---	---	Average
2483.500	28.47	5.87	39.92	52.47	46.89	54.00	7.11	Average
2484.400	28.47	5.87	39.92	49.59	44.01	54.00	9.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

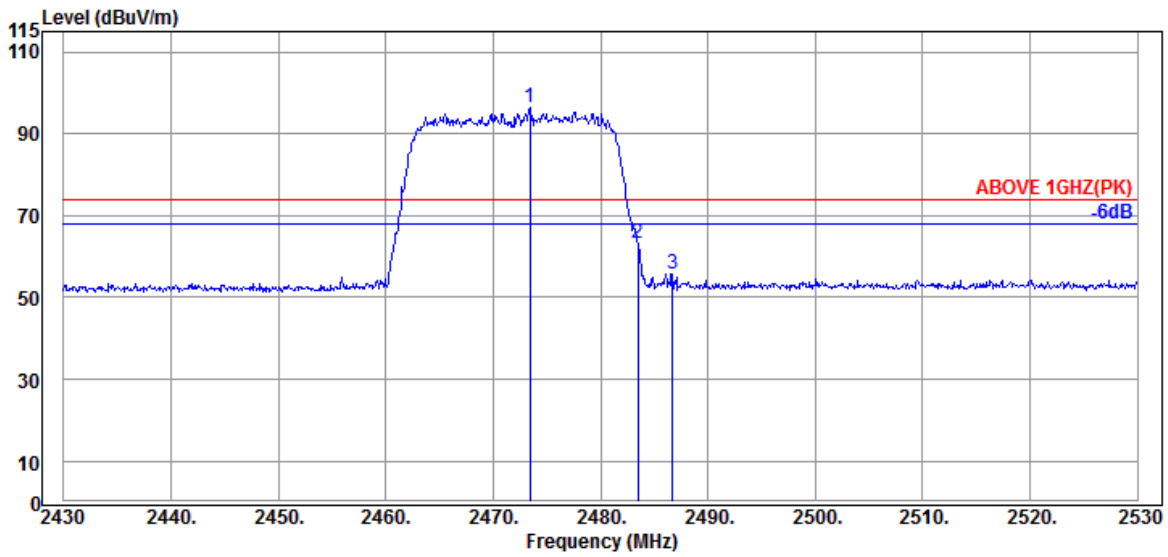

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.400	28.44	5.85	39.92	101.86	96.23	---	---	Peak
2483.500	28.47	5.87	39.92	68.75	63.17	74.00	10.83	Peak
2486.700	28.47	5.87	39.92	61.41	55.83	74.00	18.17	Peak

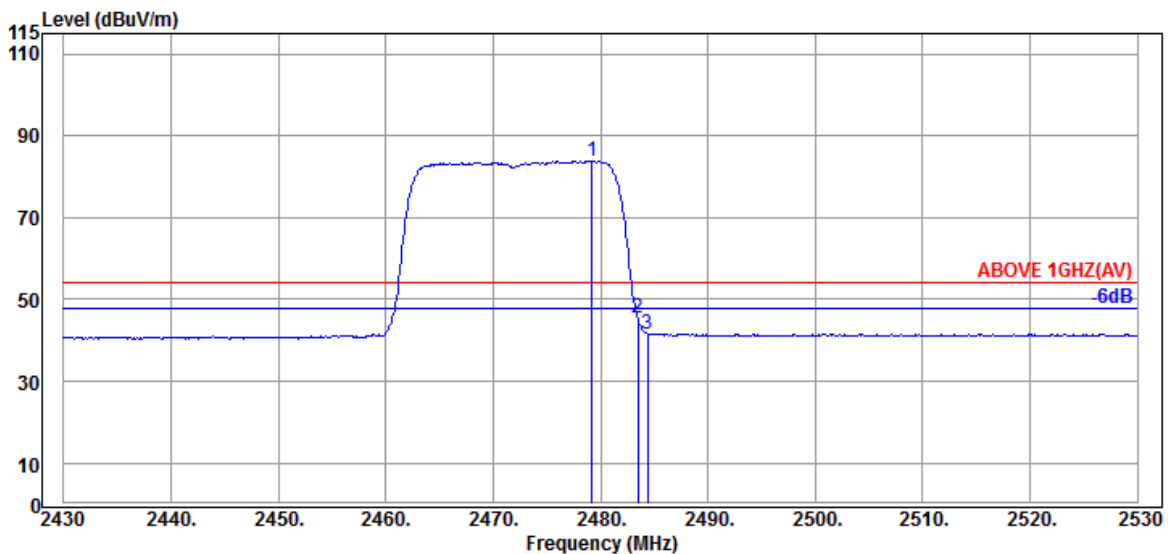


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	5.86	39.92	89.50	83.90	---	---	Average
2483.500	28.47	5.87	39.92	51.07	45.49	54.00	8.51	Average
2484.400	28.47	5.87	39.92	47.26	41.68	54.00	12.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

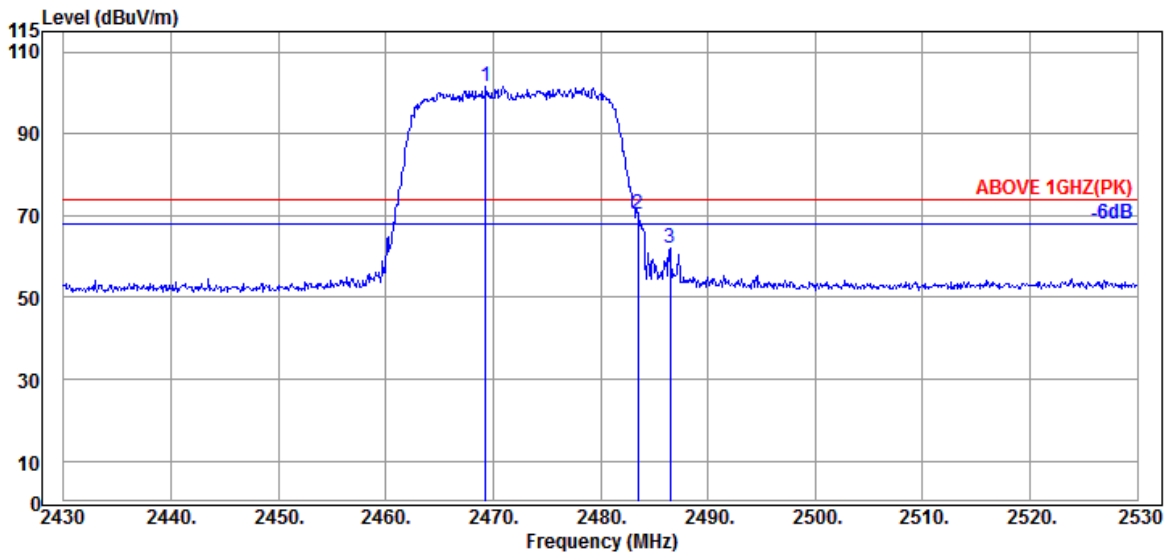

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	5.85	39.92	107.38	101.75	---	---	Peak
2483.500	28.47	5.87	39.92	76.11	70.53	74.00	3.47	Peak
2486.500	28.47	5.87	39.92	67.63	62.05	74.00	11.95	Peak

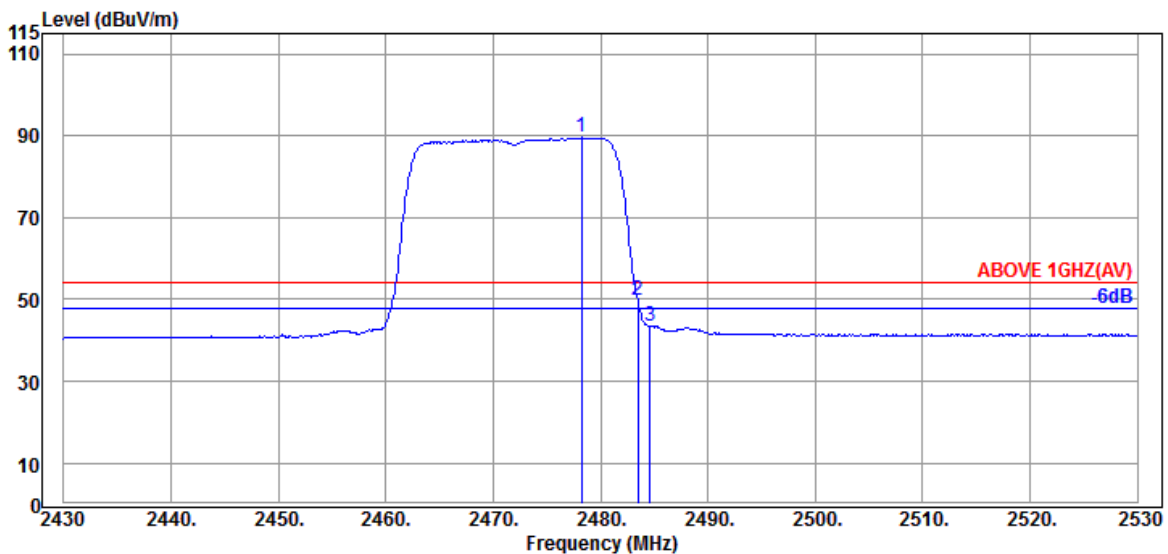


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	28.46	5.86	39.92	95.11	89.51	---	---	Average
2483.500	28.47	5.87	39.92	55.44	49.86	54.00	4.14	Average
2484.600	28.47	5.87	39.92	49.23	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

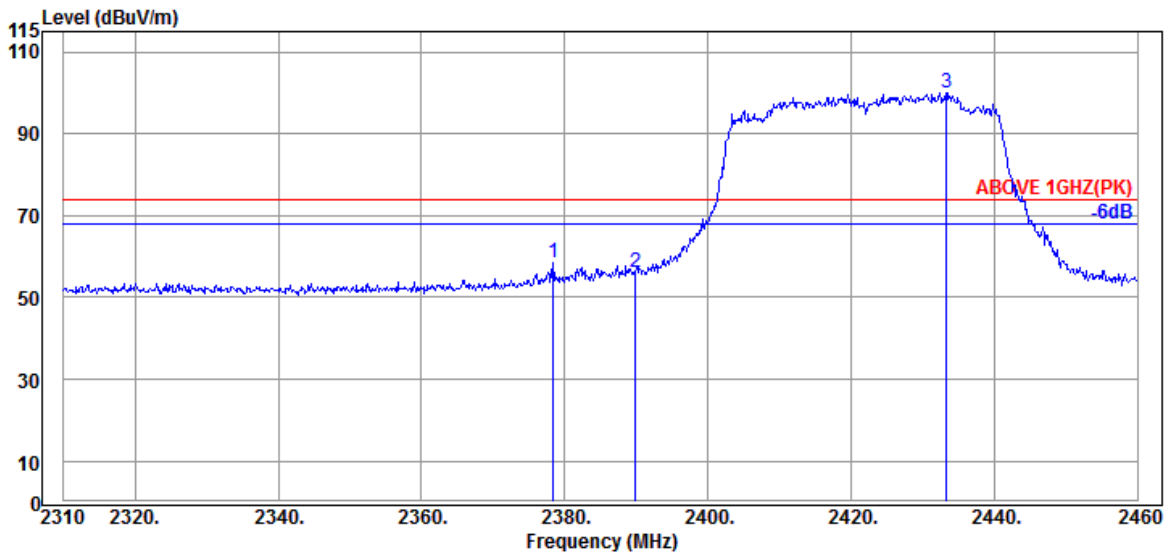

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.400	28.20	5.71	39.93	64.61	58.59	74.00	15.41	Peak
2389.950	28.20	5.72	39.93	62.21	56.20	74.00	17.80	Peak
@ 2433.300	28.34	5.79	39.93	105.92	100.12	---	---	Peak

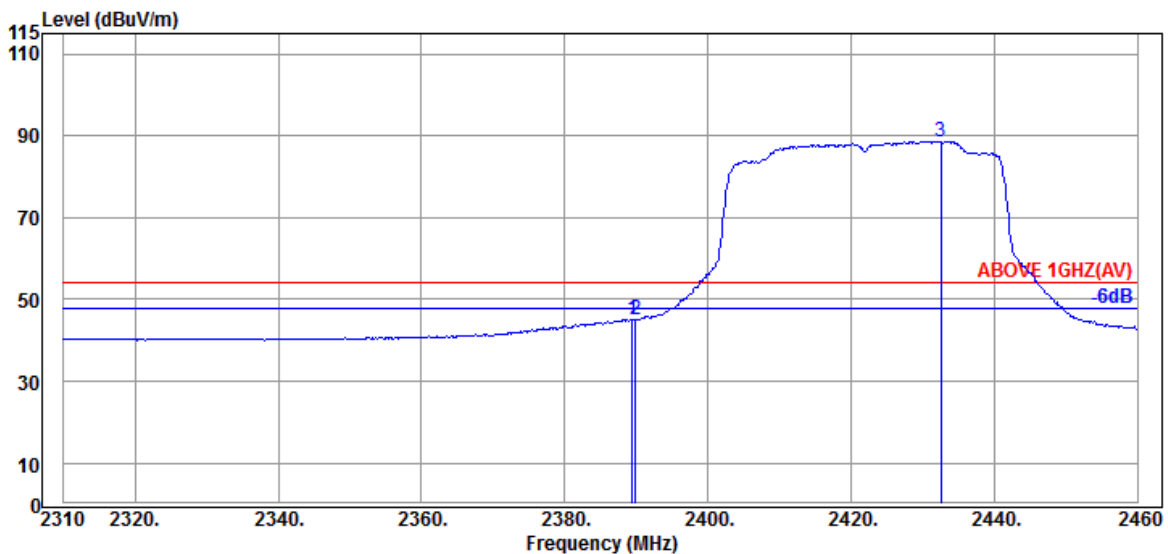


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.72	39.93	51.11	45.10	54.00	8.90	Average
2389.950	28.20	5.72	39.93	51.13	45.12	54.00	8.88	Average
@ 2432.550	28.34	5.79	39.93	94.39	88.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

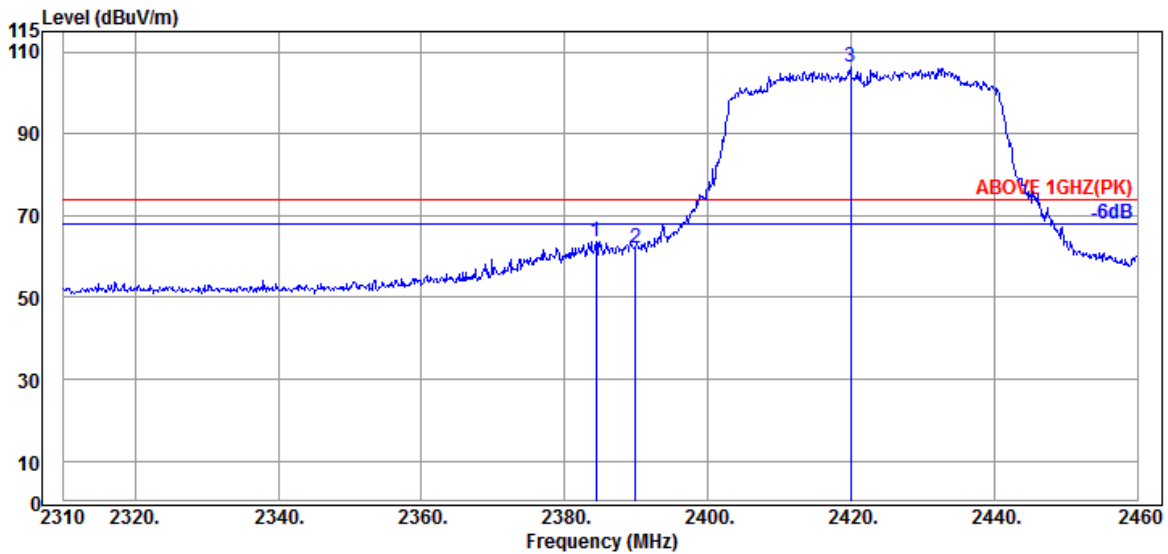

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.400	28.20	5.72	39.93	69.66	63.65	74.00	10.35	Peak
2389.950	28.20	5.72	39.93	68.00	61.99	74.00	12.01	Peak
@ 2419.950	28.29	5.77	39.93	112.14	106.27	---	---	Peak

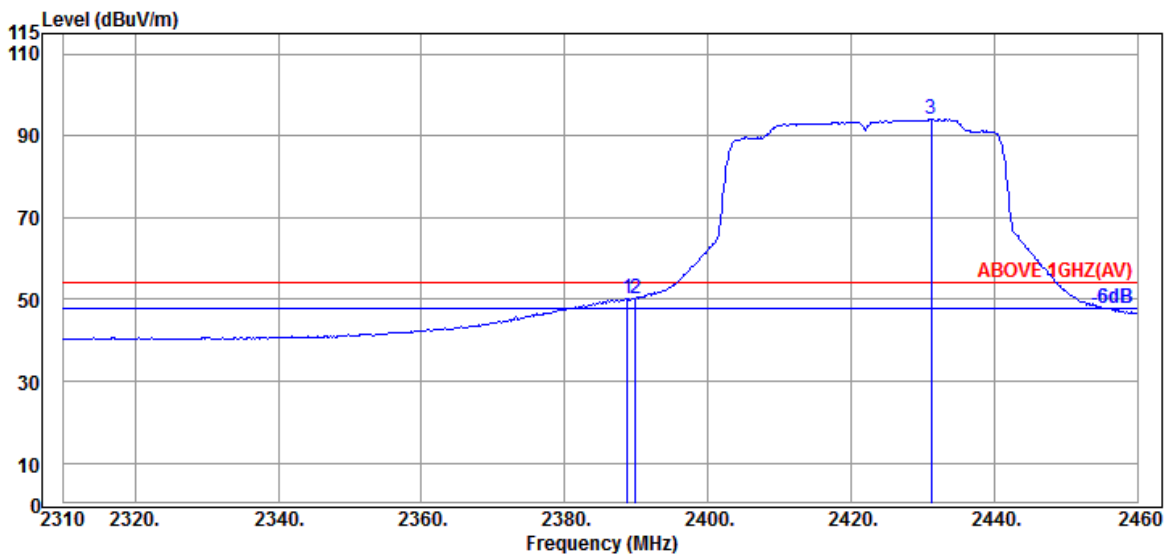


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.20	5.72	39.93	56.24	50.23	54.00	3.77	Average
2389.950	28.20	5.72	39.93	56.36	50.35	54.00	3.65	Average
@ 2431.200	28.31	5.78	39.93	99.79	93.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

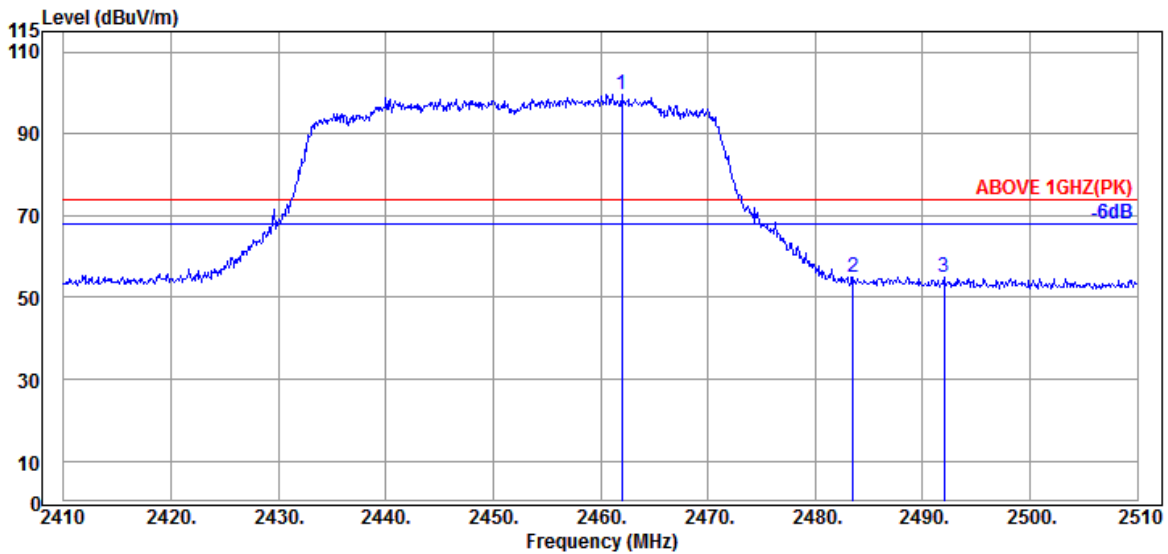

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.43	5.84	39.92	105.42	99.77	---	---	Peak
2483.500	28.47	5.87	39.92	60.67	55.09	74.00	18.91	Peak
2492.000	28.49	5.88	39.92	60.41	54.86	74.00	19.14	Peak

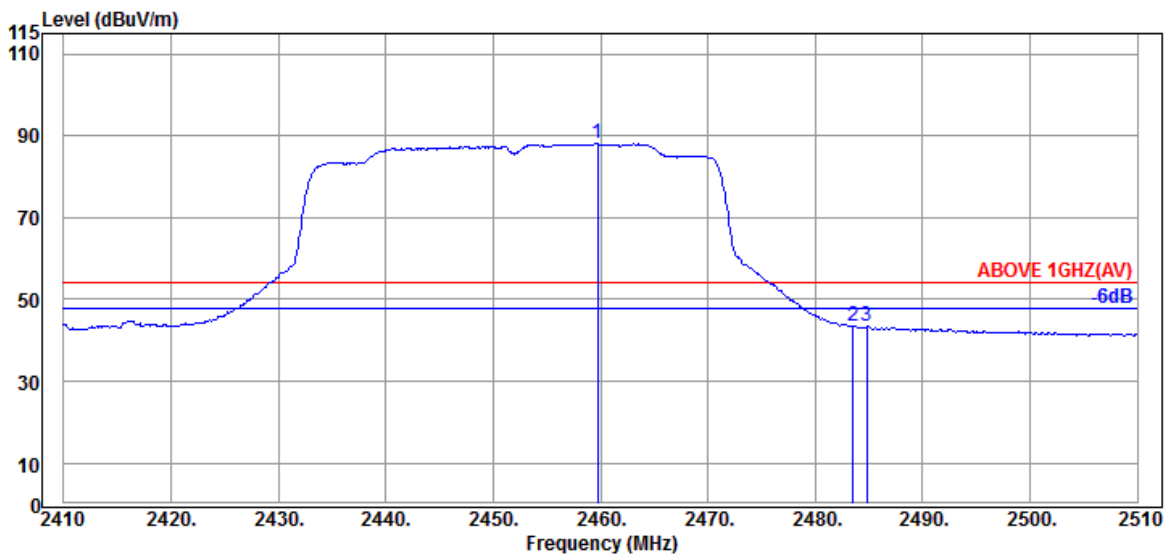


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	28.41	5.83	39.92	93.82	88.14	---	---	Average
2483.500	28.47	5.87	39.92	48.98	43.40	54.00	10.60	Average
2484.800	28.47	5.87	39.92	48.92	43.34	54.00	10.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

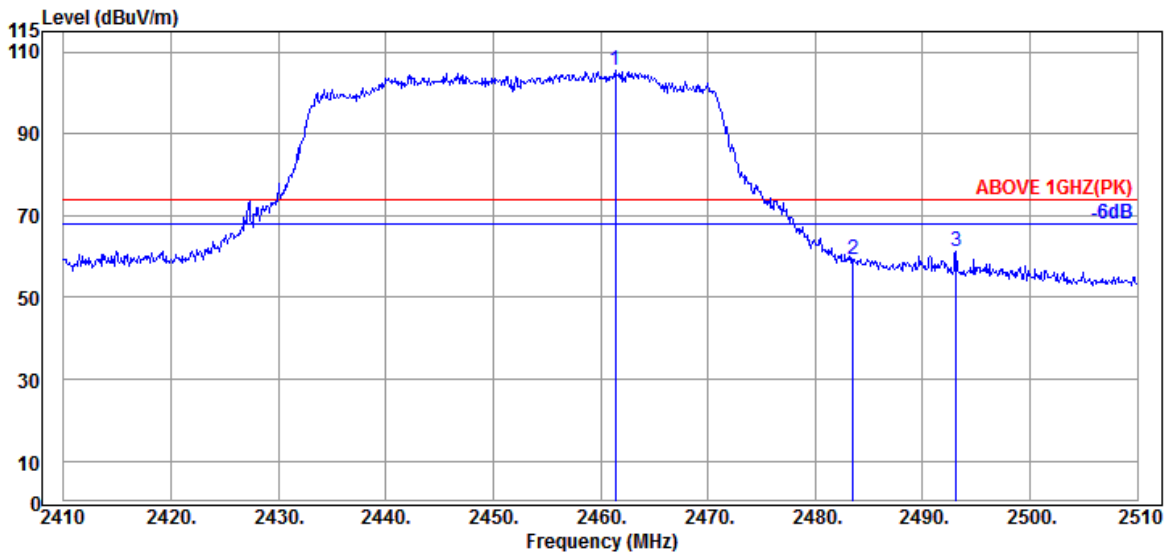

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.400	28.43	5.84	39.92	111.27	105.62	---	---	Peak
2483.500	28.47	5.87	39.92	64.98	59.40	74.00	14.60	Peak
2493.100	28.49	5.88	39.92	66.77	61.22	74.00	12.78	Peak

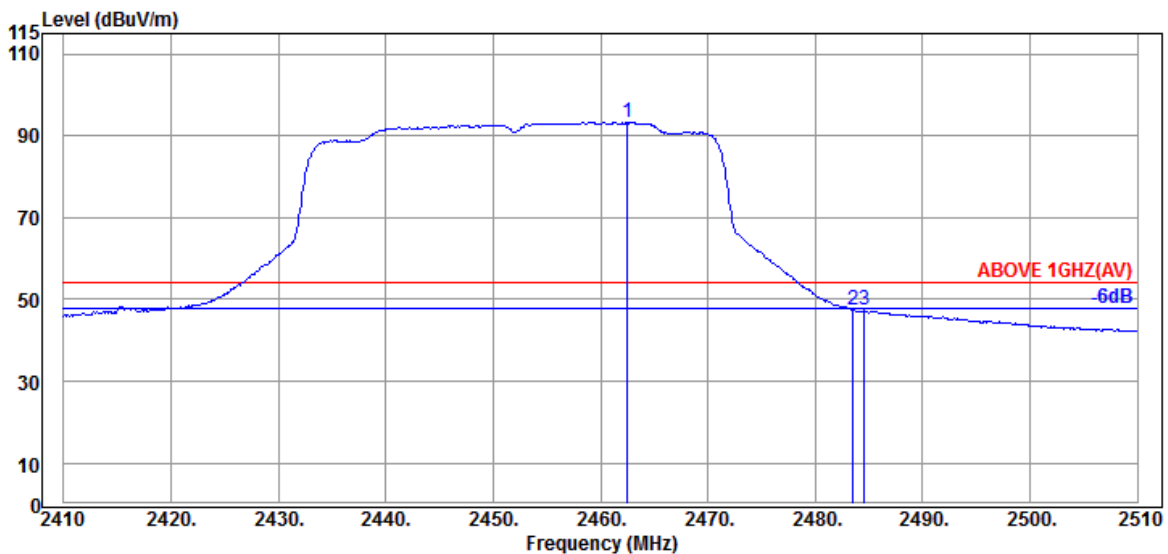


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.43	5.84	39.92	98.97	93.32	---	---	Average
2483.500	28.47	5.87	39.92	52.89	47.31	54.00	6.69	Average
2484.600	28.47	5.87	39.92	52.81	47.23	54.00	6.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

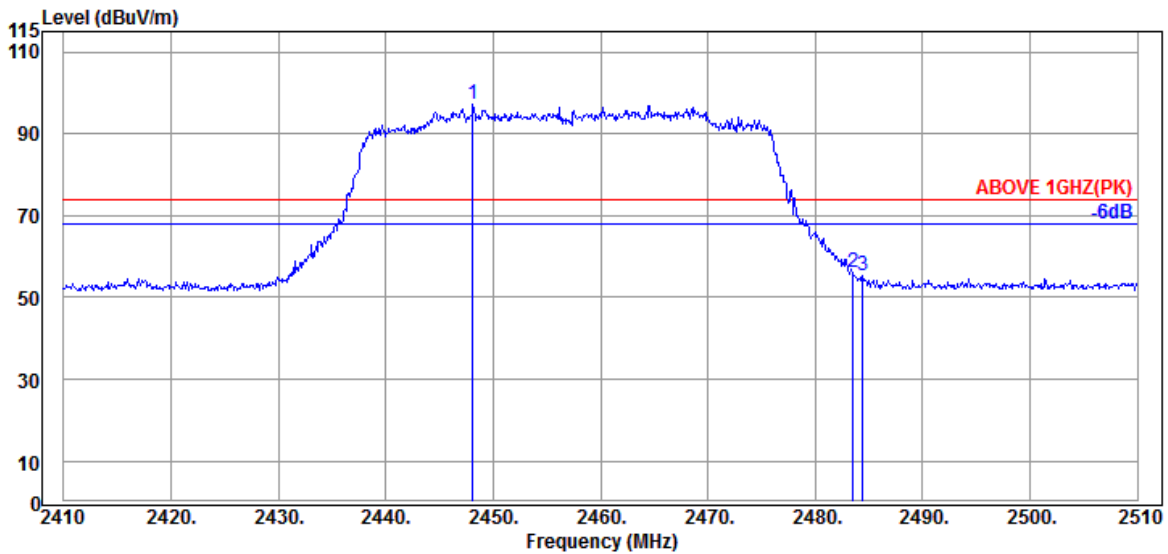

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.100	28.40	5.81	39.93	102.82	97.10	---	---	Peak
2483.500	28.47	5.87	39.92	61.68	56.10	74.00	17.90	Peak
2484.400	28.47	5.87	39.92	60.73	55.15	74.00	18.85	Peak

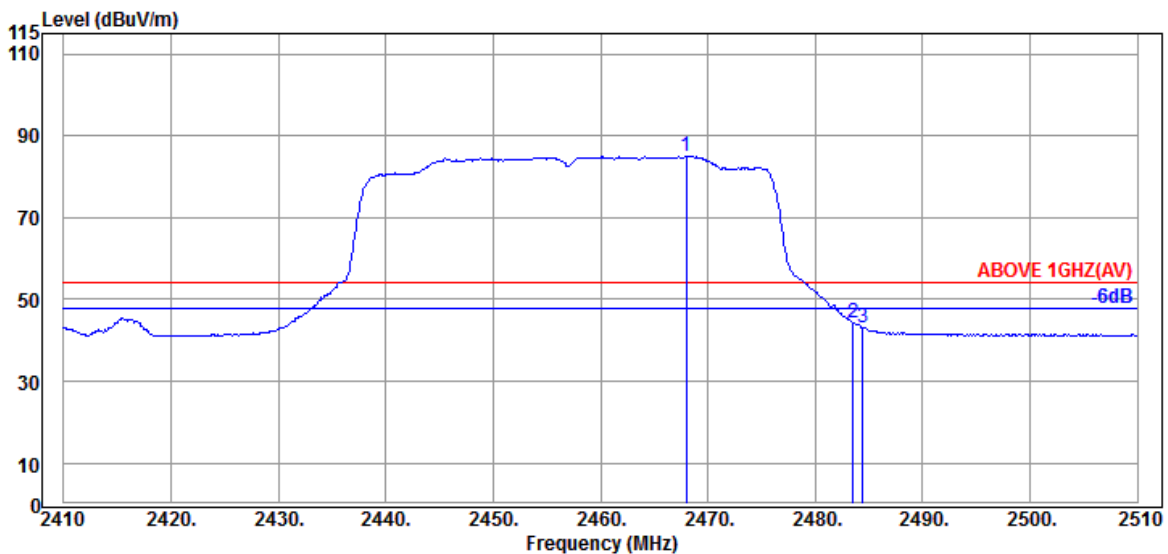


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.44	5.85	39.92	90.62	84.99	---	---	Average
2483.500	28.47	5.87	39.92	49.91	44.33	54.00	9.67	Average
2484.400	28.47	5.87	39.92	48.84	43.26	54.00	10.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

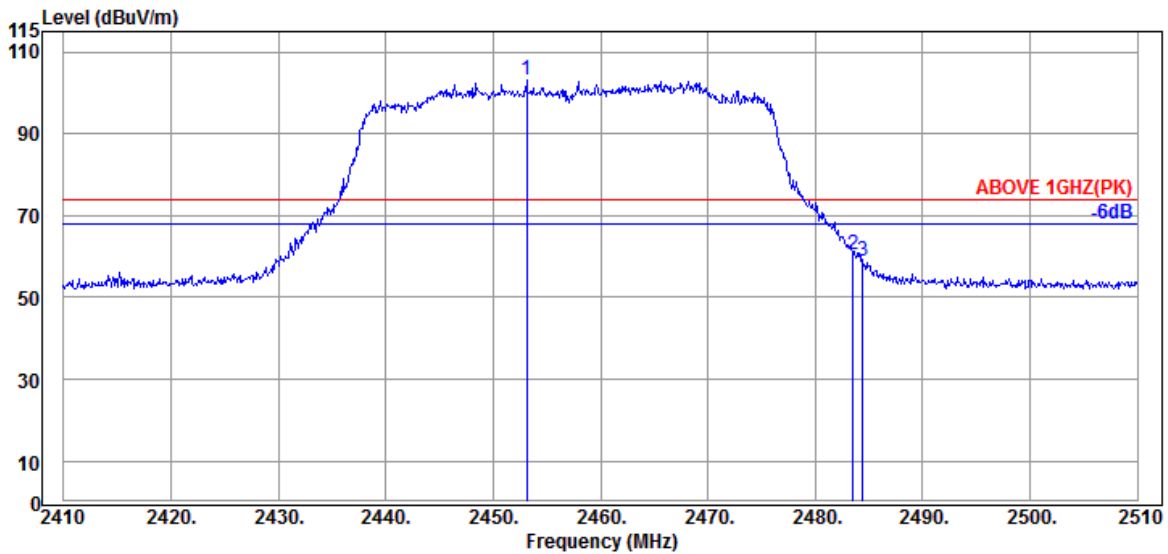

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.100	28.40	5.81	39.92	108.67	102.96	---	---	Peak
2483.500	28.47	5.87	39.92	65.96	60.38	74.00	13.62	Peak
2484.400	28.47	5.87	39.92	64.27	58.69	74.00	15.31	Peak

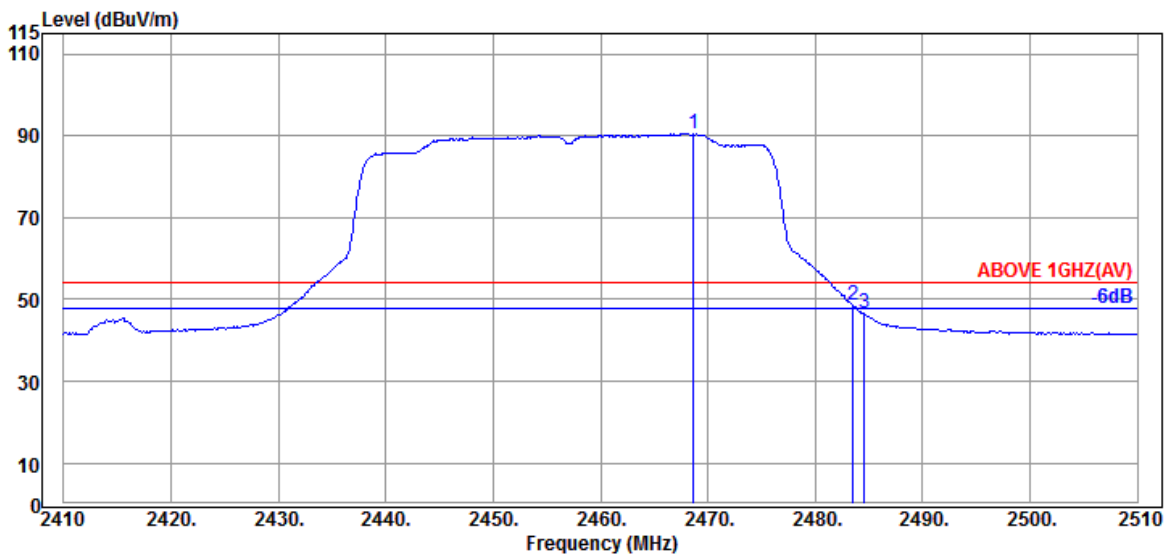


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.44	5.85	39.92	96.14	90.51	---	---	Average
2483.500	28.47	5.87	39.92	54.31	48.73	54.00	5.27	Average
2484.600	28.47	5.87	39.92	52.16	46.58	54.00	7.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

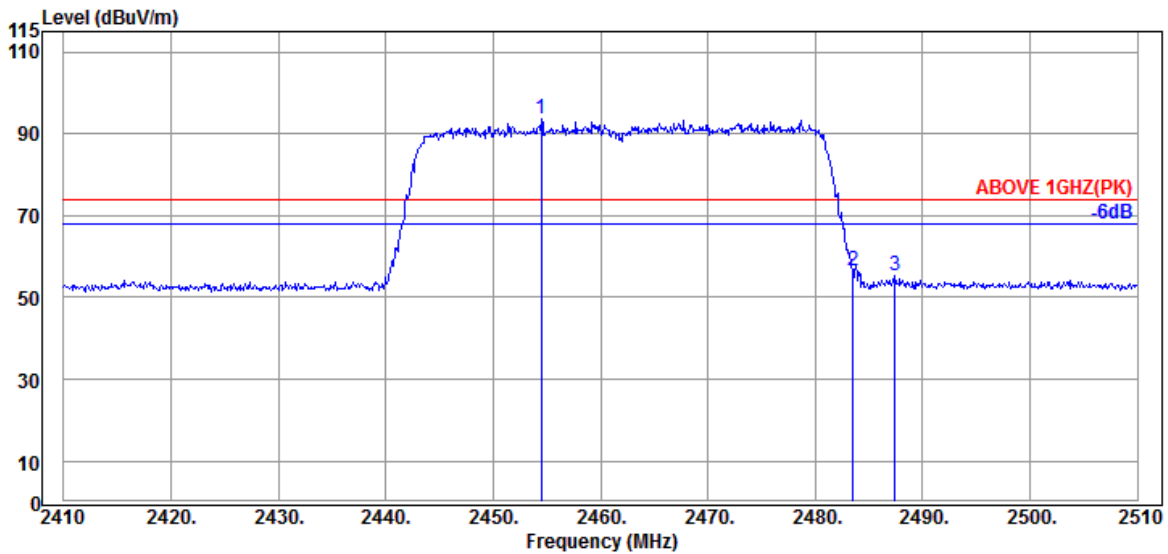

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.41	5.83	39.92	99.24	93.56	---	---	Peak
2483.500	28.47	5.87	39.92	62.26	56.68	74.00	17.32	Peak
2487.400	28.47	5.87	39.92	60.91	55.33	74.00	18.67	Peak

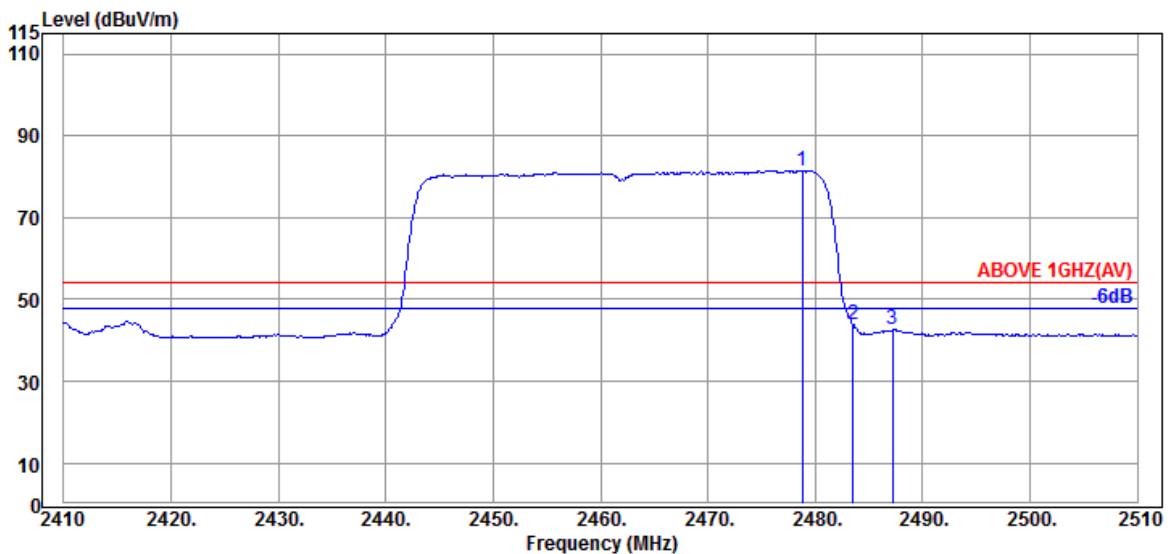


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.46	5.86	39.92	87.13	81.53	---	---	Average
2483.500	28.47	5.87	39.92	49.49	43.91	54.00	10.09	Average
2487.200	28.47	5.87	39.92	48.24	42.66	54.00	11.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

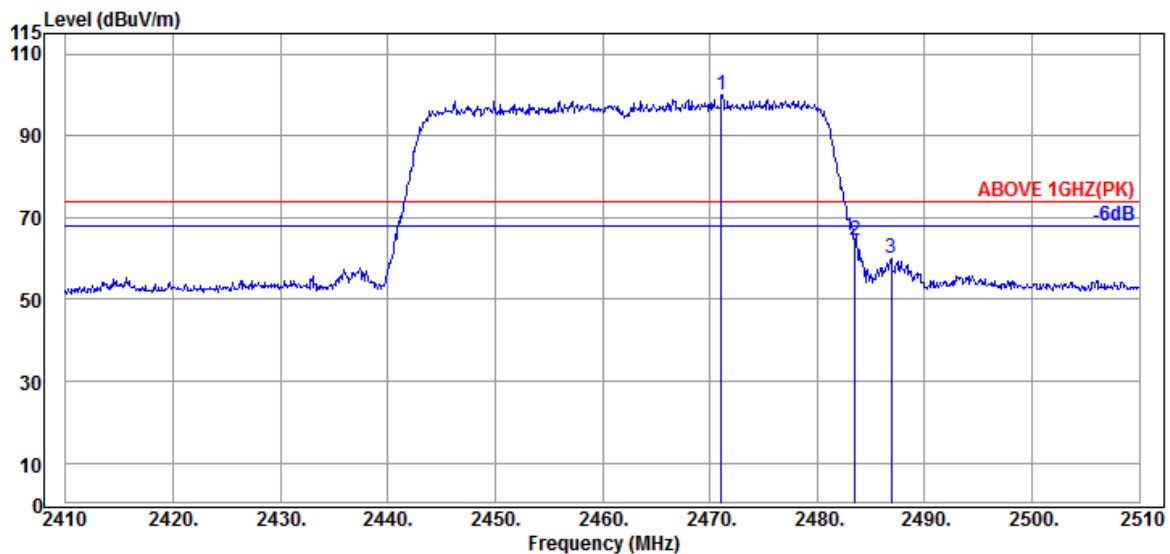

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.100	28.44	5.85	39.92	105.54	99.91	---	---	Peak
2483.500	28.47	5.87	39.92	70.06	64.48	74.00	9.52	Peak
2486.900	28.47	5.87	39.92	65.61	60.03	74.00	13.97	Peak

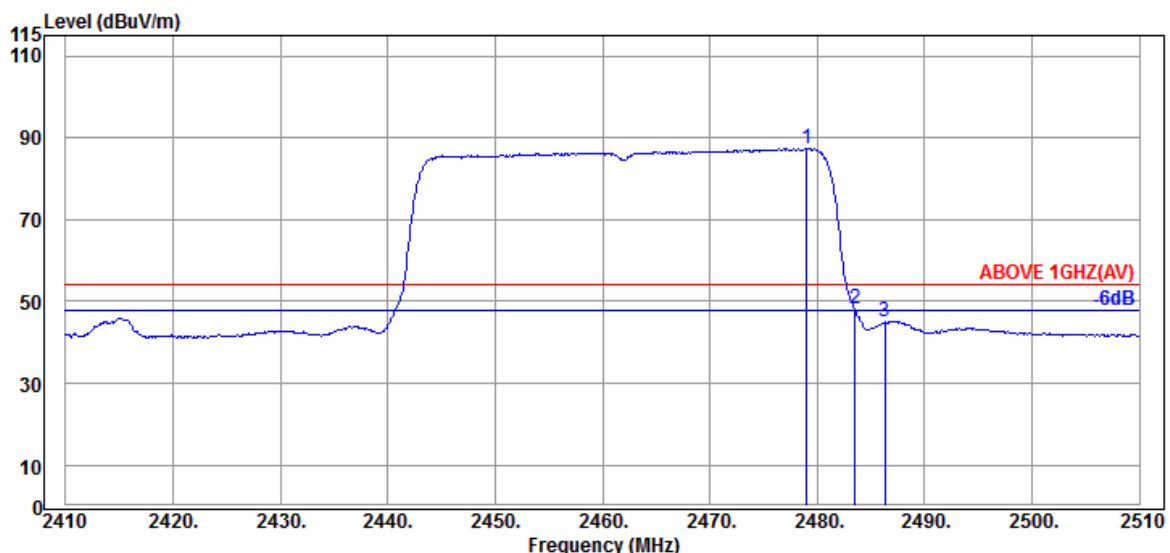


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	5.86	39.92	92.99	87.39	---	---	Average
2483.500	28.47	5.87	39.92	53.99	48.41	54.00	5.59	Average
2486.300	28.47	5.87	39.92	50.78	45.20	54.00	8.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

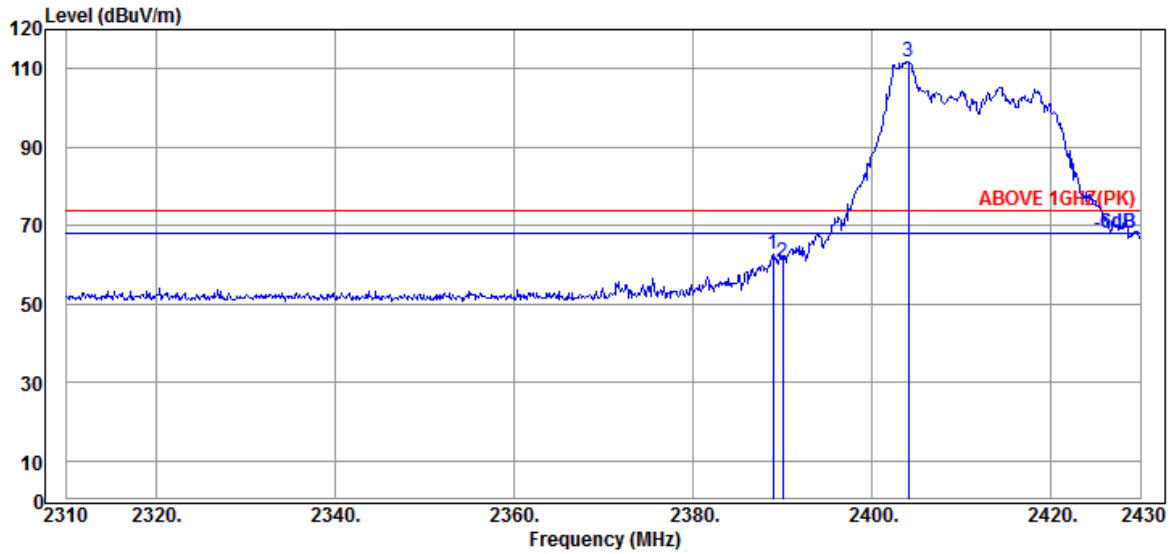

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.20	5.72	39.93	68.58	62.57	74.00	11.43	Peak
2390.040	28.20	5.72	39.93	66.51	60.50	74.00	13.50	Peak
@ 2404.080	28.20	5.74	39.93	117.89	111.90	---	---	Peak

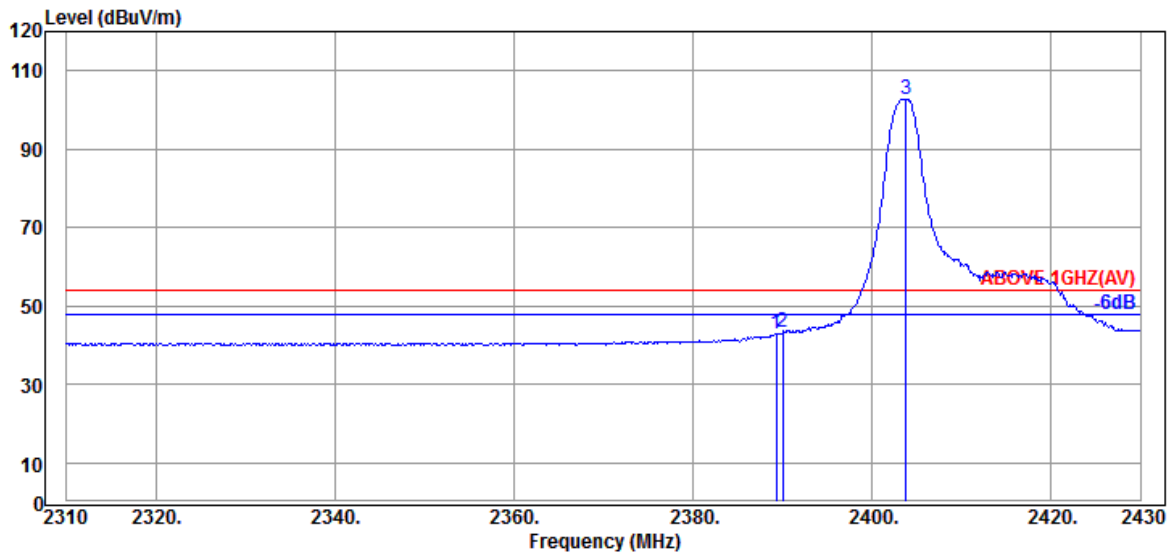


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.20	5.72	39.93	48.96	42.95	54.00	11.05	Average
2390.040	28.20	5.72	39.93	49.19	43.18	54.00	10.82	Average
@ 2403.840	28.20	5.74	39.93	108.85	102.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

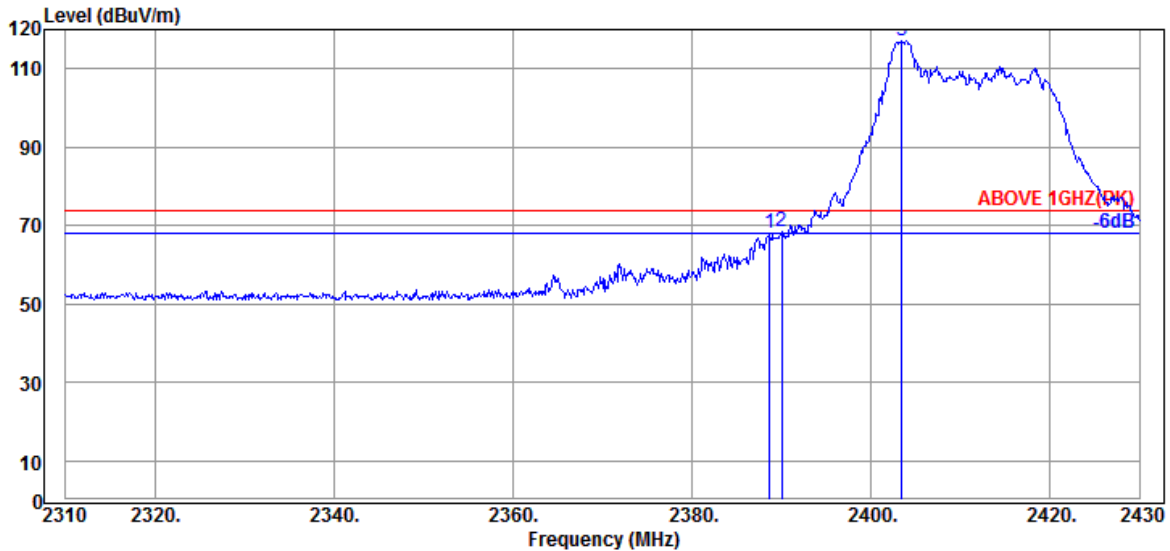

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.20	5.72	39.93	73.98	67.97	74.00	6.03	Peak
2390.040	28.20	5.72	39.93	74.32	68.31	74.00	5.69	Peak
@ 2403.480	28.20	5.74	39.93	123.21	117.22	---	---	Peak

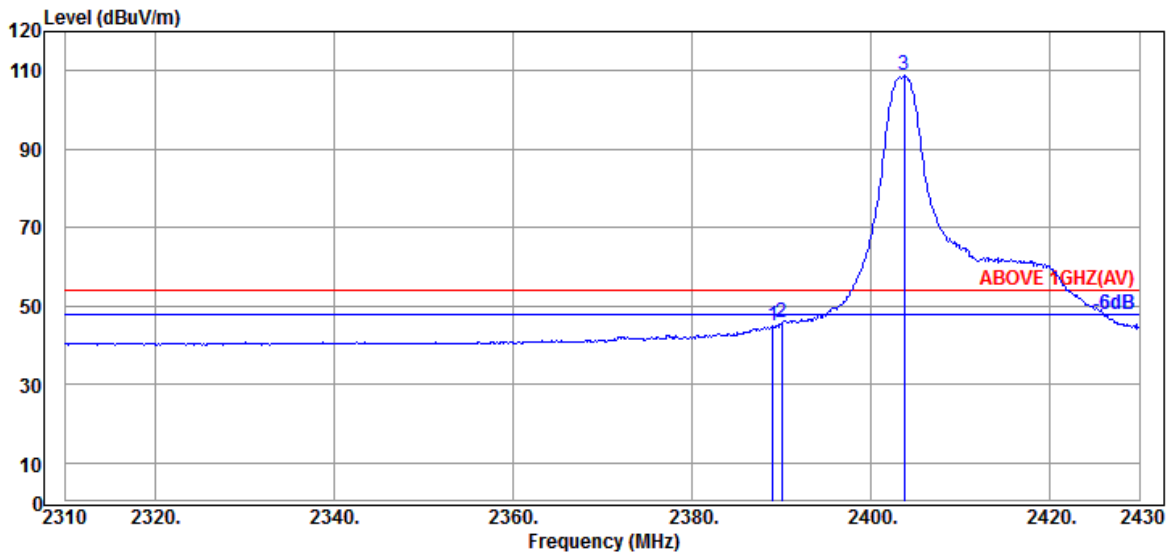


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.20	5.72	39.93	50.83	44.82	54.00	9.18	Average
2390.040	28.20	5.72	39.93	51.61	45.60	54.00	8.40	Average
@ 2403.720	28.20	5.74	39.93	114.81	108.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

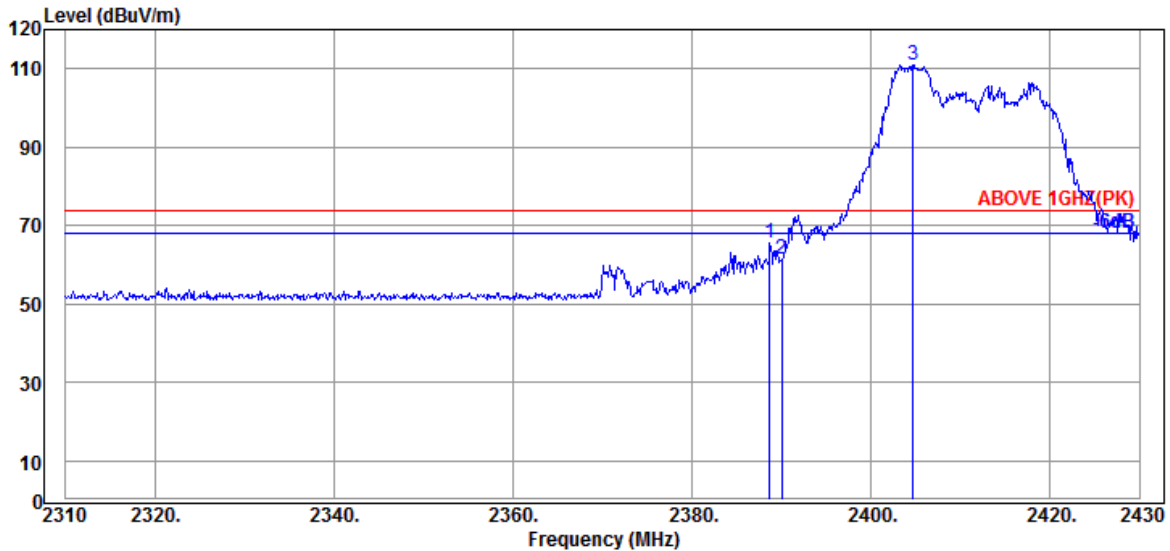

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.20	5.72	39.93	71.53	65.52	74.00	8.48	Peak
2390.040	28.20	5.72	39.93	67.50	61.49	74.00	12.51	Peak
@ 2404.680	28.23	5.75	39.93	117.06	111.11	---	---	Peak

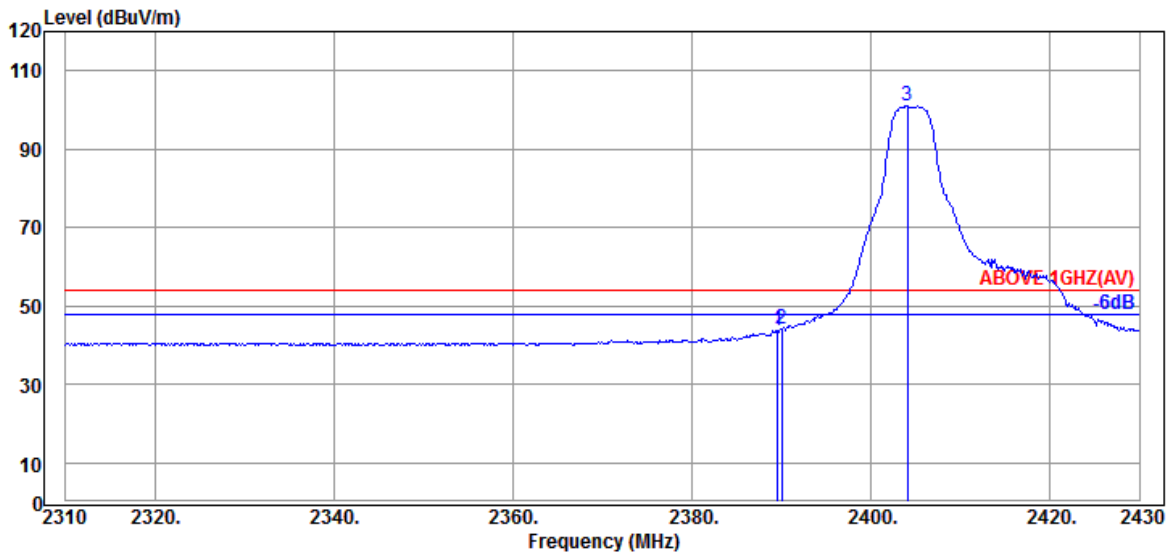


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.93	49.71	43.70	54.00	10.30	Average
2390.040	28.20	5.72	39.93	50.20	44.19	54.00	9.81	Average
@ 2404.080	28.20	5.74	39.93	106.91	100.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

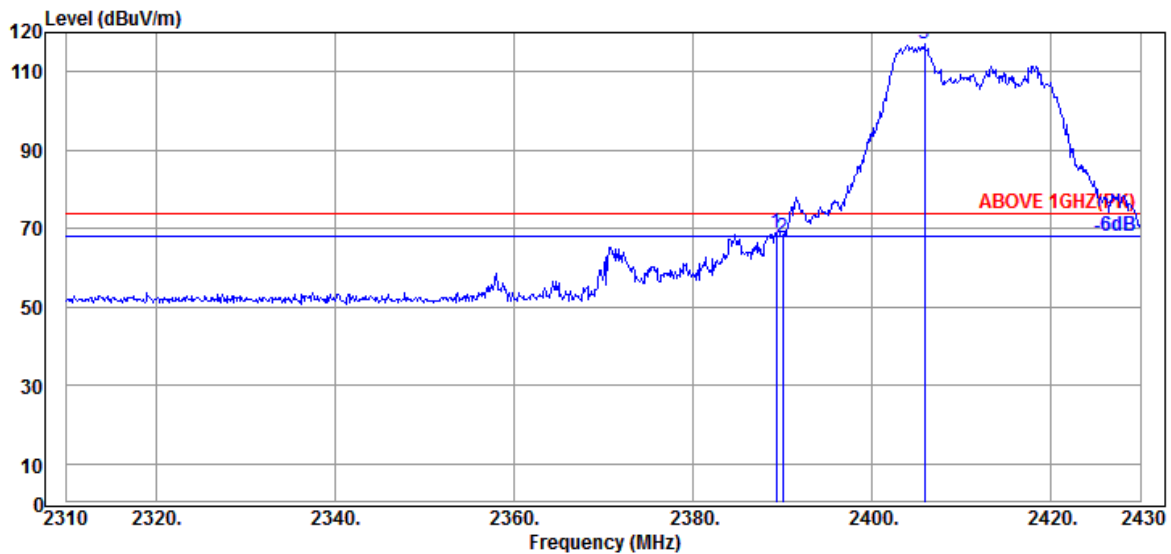

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.20	5.72	39.93	74.92	68.91	74.00	5.09	Peak
2390.040	28.20	5.72	39.93	73.73	67.72	74.00	6.28	Peak
@ 2405.880	28.23	5.75	39.93	122.90	116.95	---	---	Peak

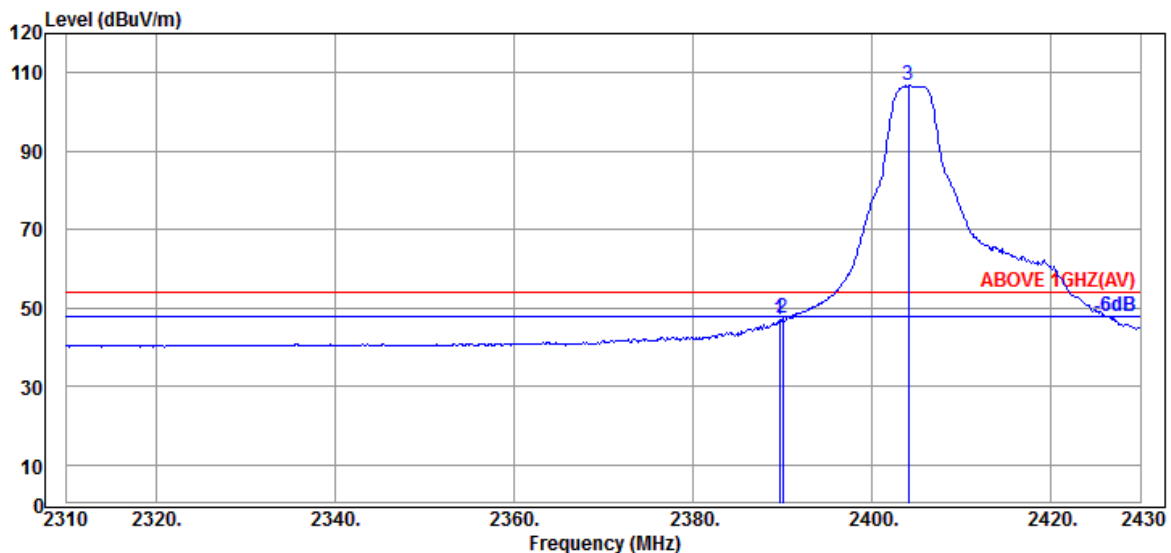


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	52.84	46.83	54.00	7.17	Average
2390.040	28.20	5.72	39.93	53.23	47.22	54.00	6.78	Average
@ 2404.080	28.20	5.74	39.93	112.70	106.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

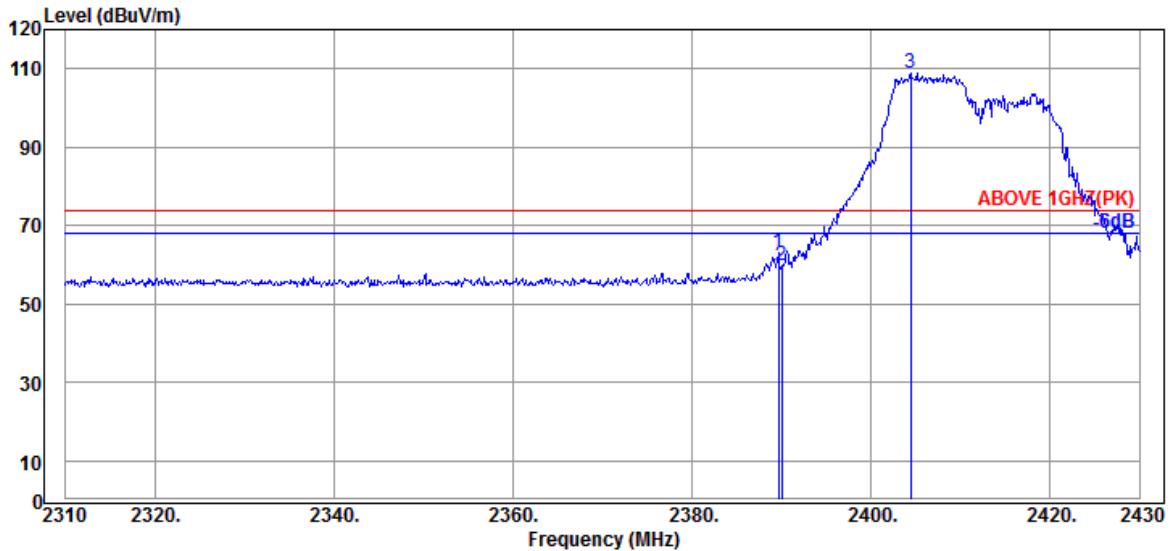

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	69.26	63.25	74.00	10.75	Peak
2390.040	28.20	5.72	39.93	65.64	59.63	74.00	14.37	Peak
@ 2404.440	28.23	5.75	39.93	114.84	108.89	---	---	Peak

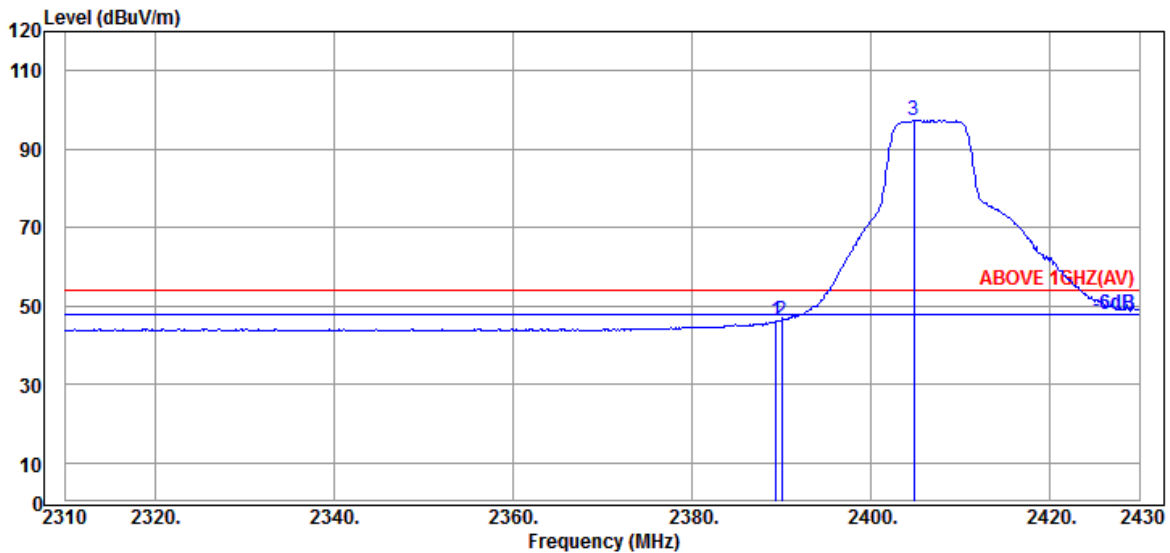


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.20	5.72	39.93	52.22	46.21	54.00	7.79	Average
2390.040	28.20	5.72	39.93	52.27	46.26	54.00	7.74	Average
@ 2404.800	28.23	5.75	39.93	103.36	97.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

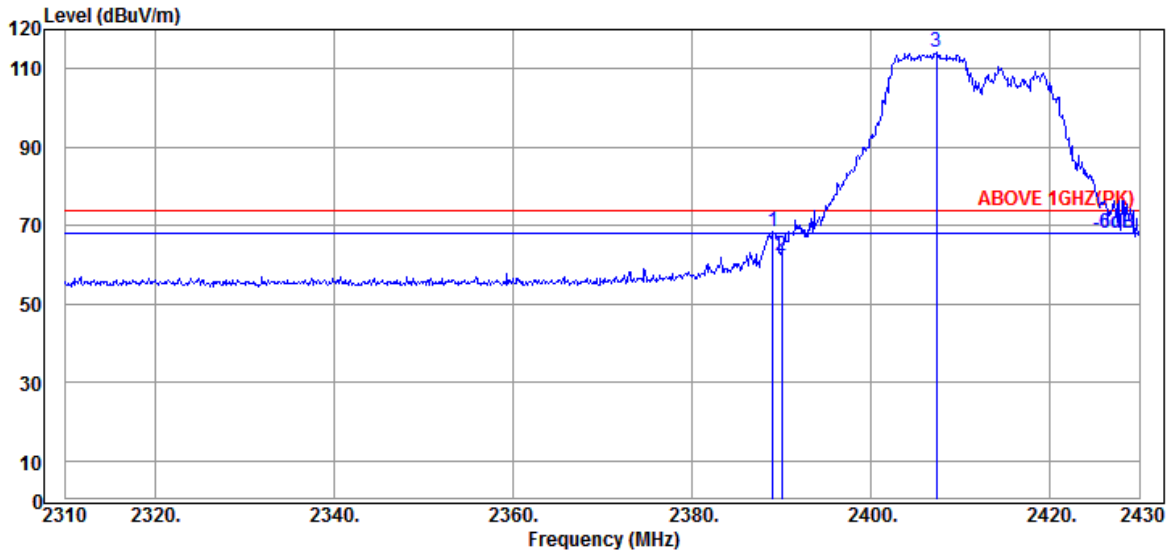

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.20	5.72	39.93	74.29	68.28	74.00	5.72	Peak
2390.040	28.20	5.72	39.93	68.18	62.17	74.00	11.83	Peak
@ 2407.320	28.23	5.75	39.93	120.26	114.31	---	---	Peak

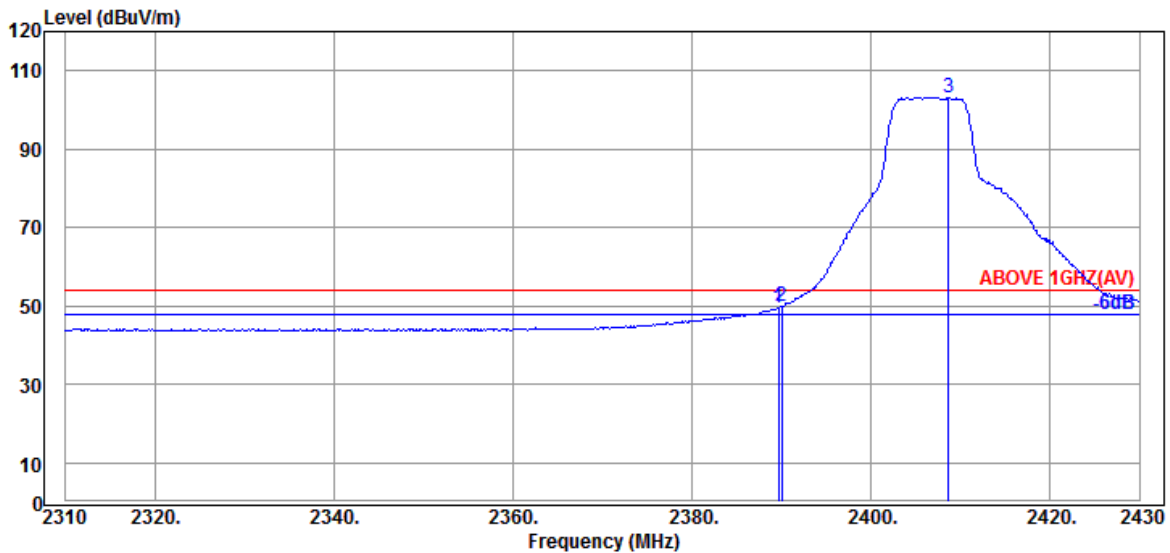


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.93	55.49	49.48	54.00	4.52	Average
2390.040	28.20	5.72	39.93	56.08	50.07	54.00	3.93	Average
@ 2408.640	28.23	5.75	39.93	109.11	103.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

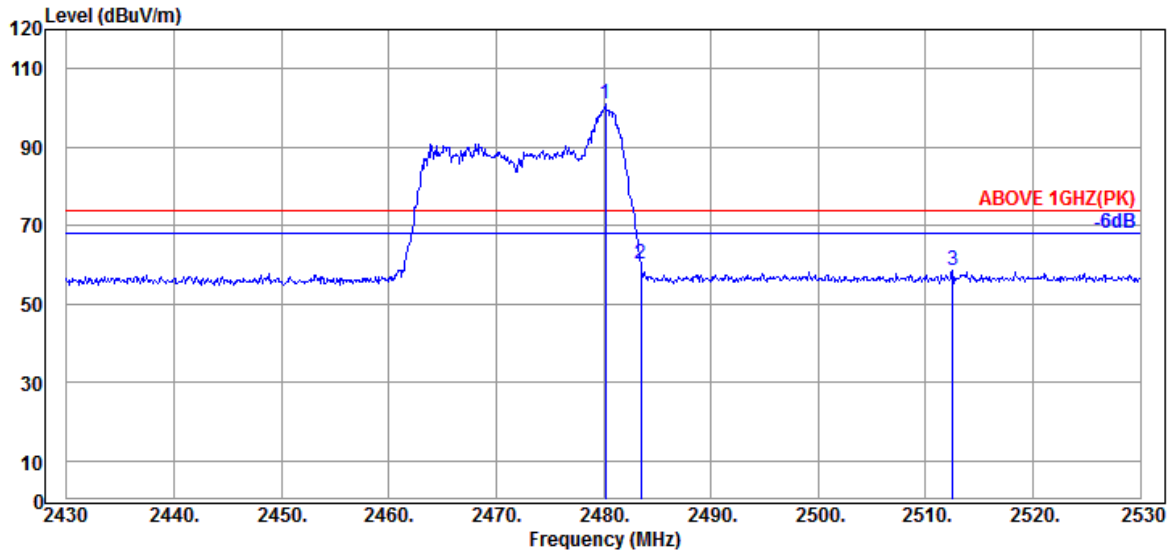

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	5.86	39.92	106.82	101.22	---	---	Peak
2483.500	28.47	5.87	39.92	65.86	60.28	74.00	13.72	Peak
2512.500	28.56	5.93	39.92	63.93	58.50	74.00	15.50	Peak

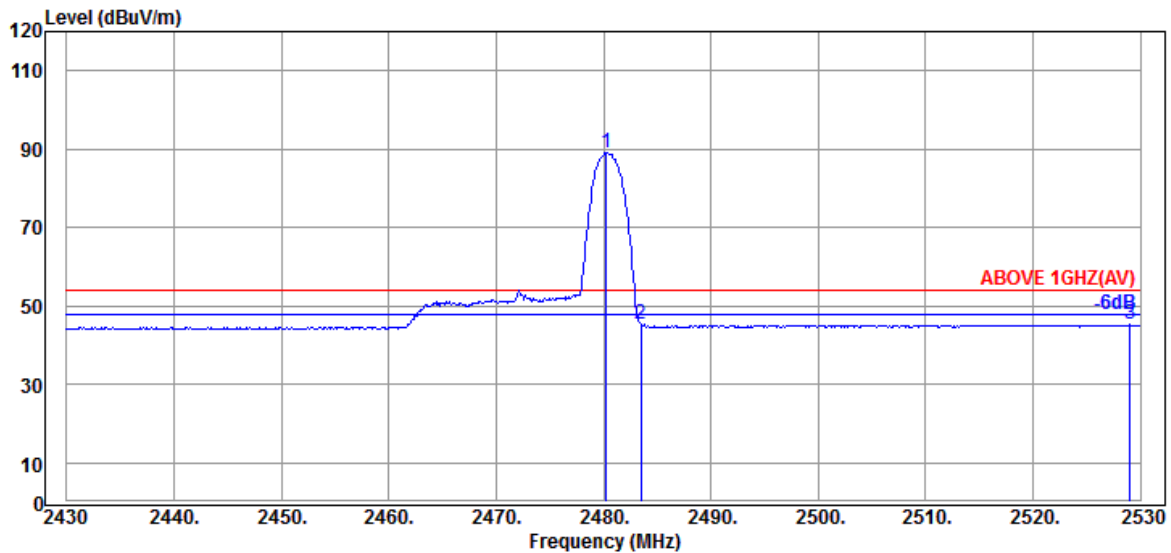


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	5.86	39.92	94.51	88.91	---	---	Average
2483.500	28.47	5.87	39.92	51.00	45.42	54.00	8.58	Average
2529.000	28.61	5.96	39.93	50.61	45.25	54.00	8.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

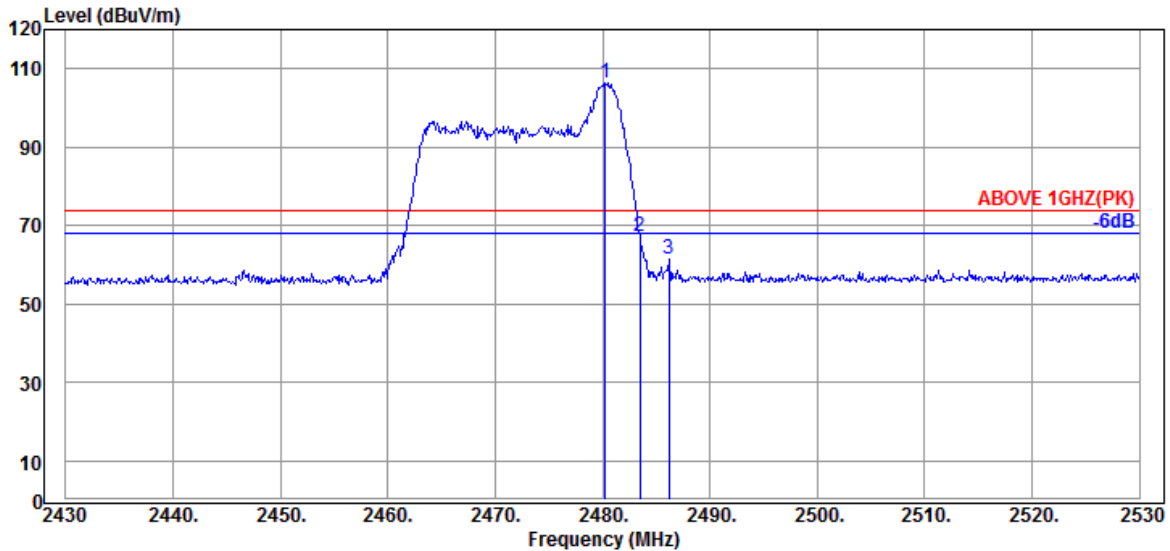

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	5.86	39.92	111.84	106.24	---	---	Peak
2483.500	28.47	5.87	39.92	72.92	67.34	74.00	6.66	Peak
2486.200	28.47	5.87	39.92	67.15	61.57	74.00	12.43	Peak

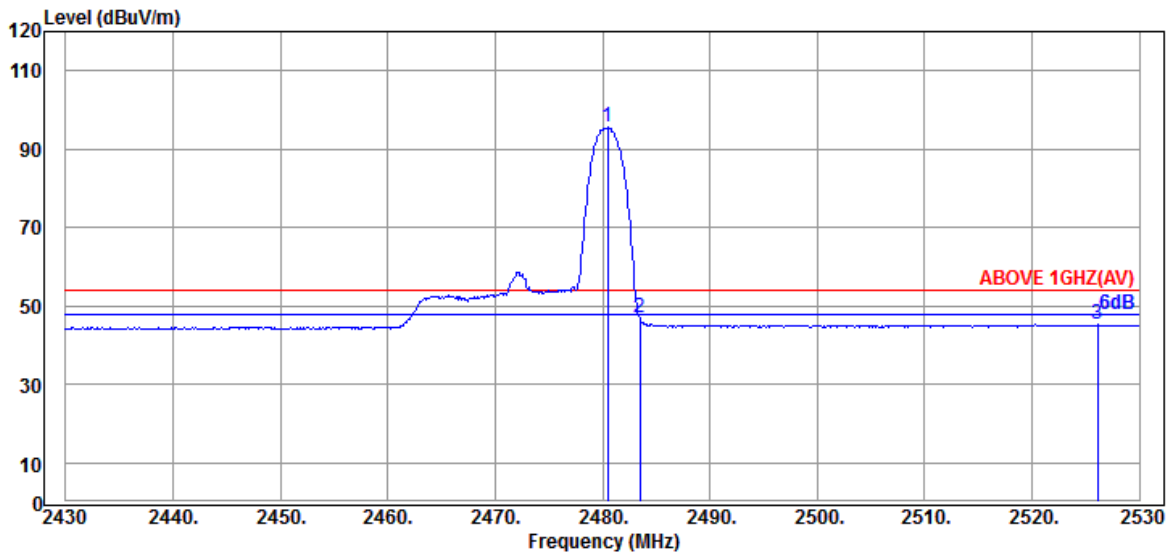


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	5.86	39.92	101.06	95.46	---	---	Average
2483.500	28.47	5.87	39.92	52.48	46.90	54.00	7.10	Average
2526.100	28.61	5.96	39.93	50.55	45.19	54.00	8.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

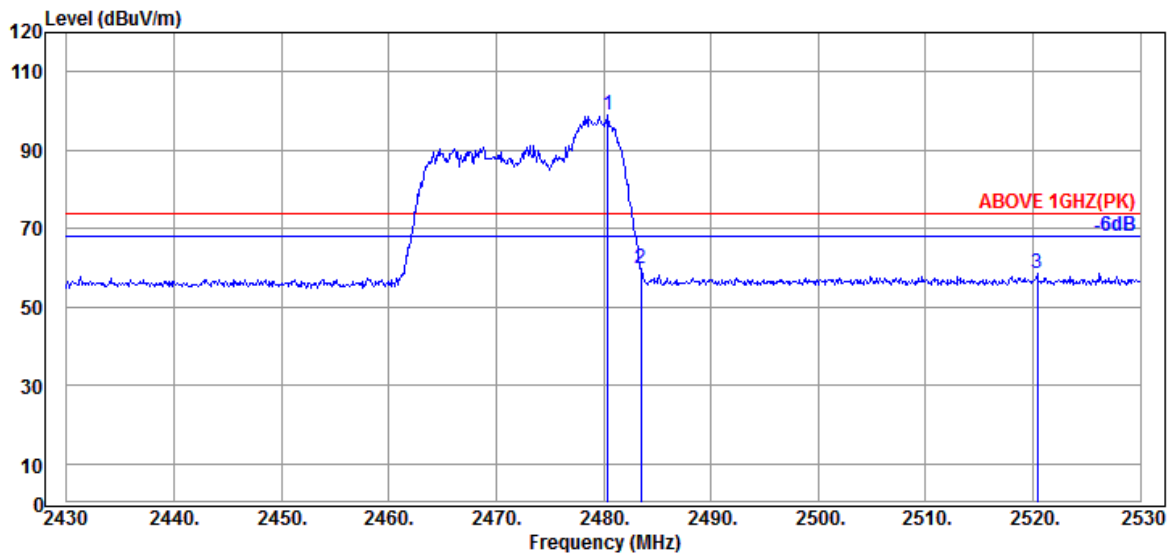

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	5.86	39.92	104.70	99.10	---	---	Peak
2483.500	28.47	5.87	39.92	65.35	59.77	74.00	14.23	Peak
2520.400	28.59	5.94	39.93	64.03	58.63	74.00	15.37	Peak

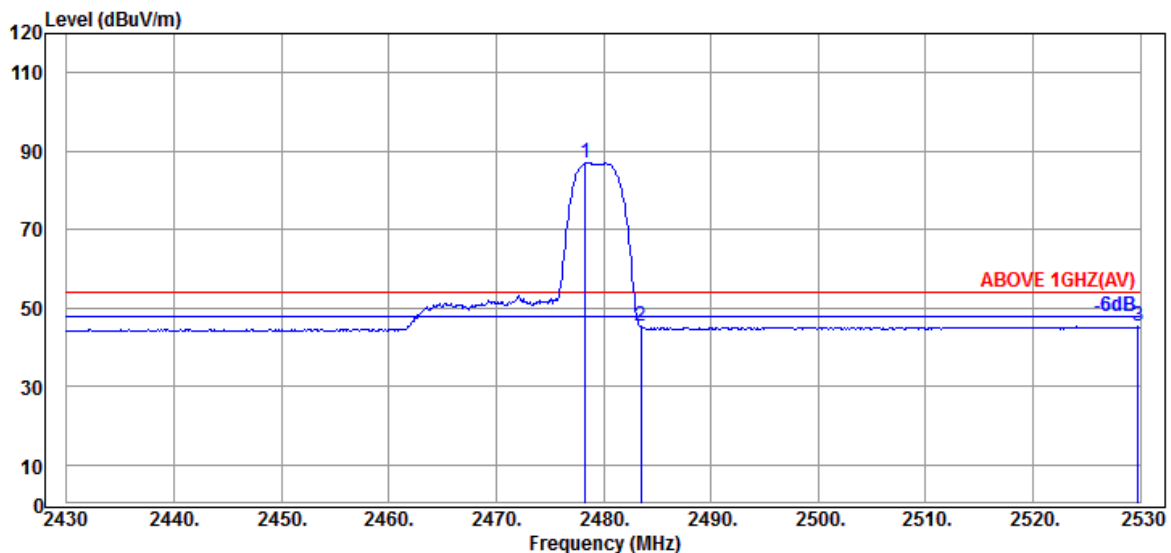


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	28.46	5.86	39.92	92.67	87.07	---	---	Average
2483.500	28.47	5.87	39.92	50.78	45.20	54.00	8.80	Average
2529.800	28.61	5.96	39.93	50.63	45.27	54.00	8.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

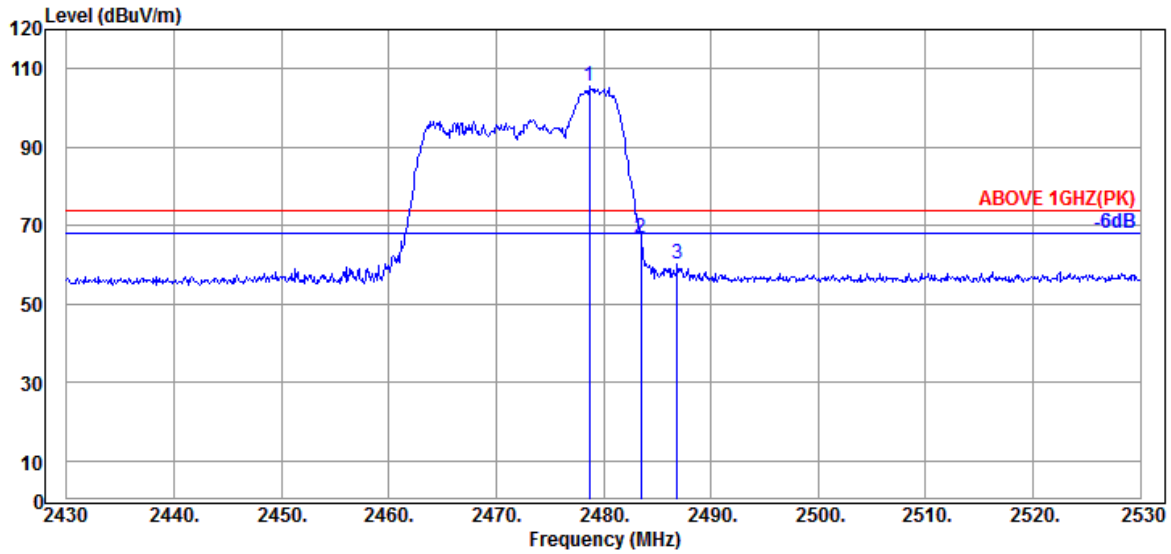

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.46	5.86	39.92	111.15	105.55	---	---	Peak
2483.500	28.47	5.87	39.92	72.49	66.91	74.00	7.09	Peak
2486.900	28.47	5.87	39.92	65.89	60.31	74.00	13.69	Peak

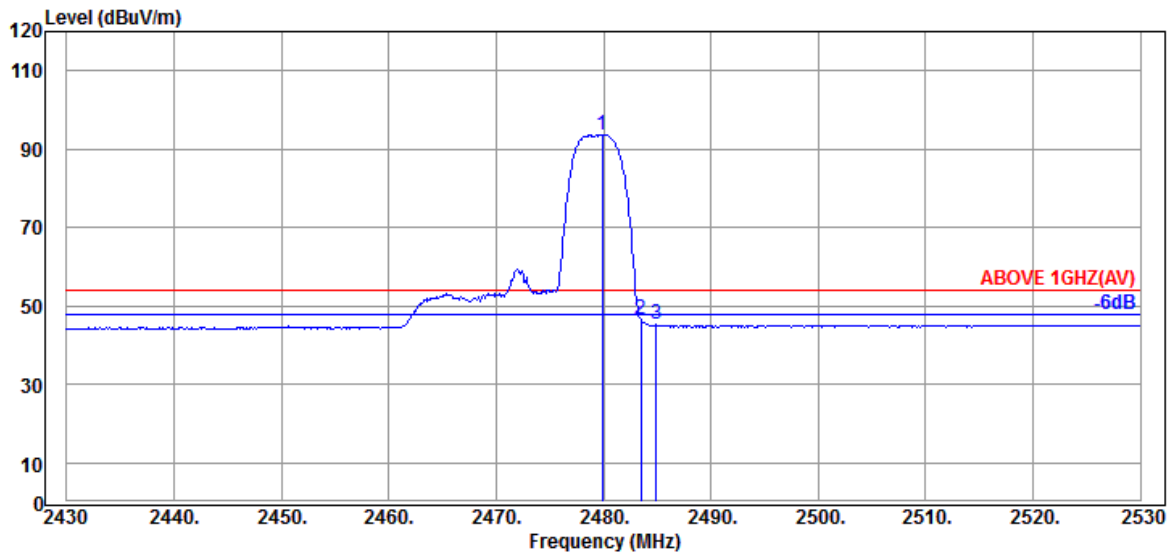


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	5.86	39.92	99.16	93.56	---	---	Average
2483.500	28.47	5.87	39.92	51.99	46.41	54.00	7.59	Average
2484.900	28.47	5.87	39.92	50.80	45.22	54.00	8.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

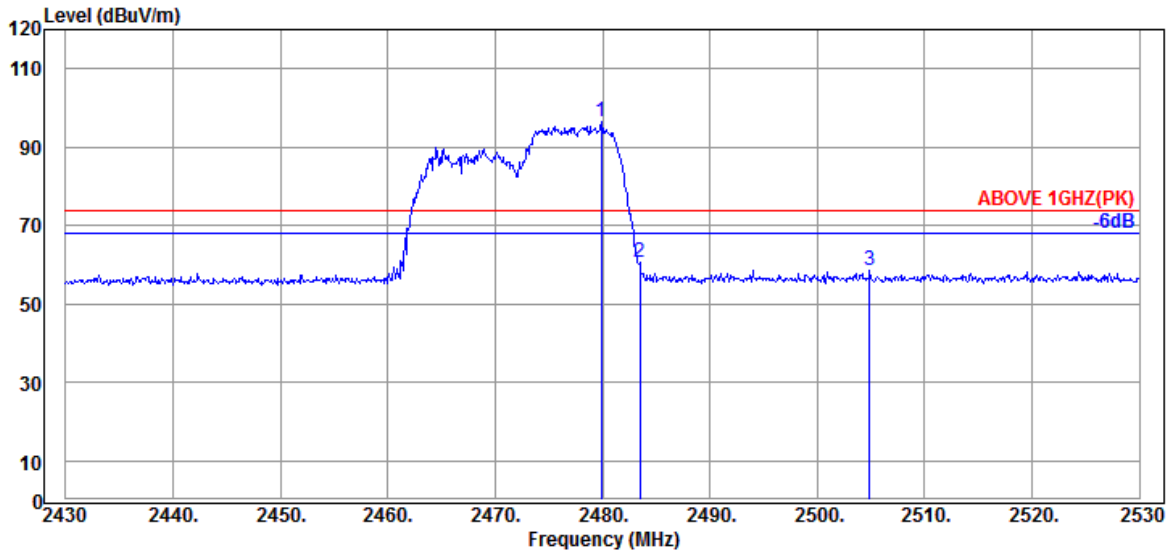

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	5.86	39.92	101.92	96.32	---	---	Peak
2483.500	28.47	5.87	39.92	66.39	60.81	74.00	13.19	Peak
2504.900	28.53	5.91	39.92	63.95	58.47	74.00	15.53	Peak

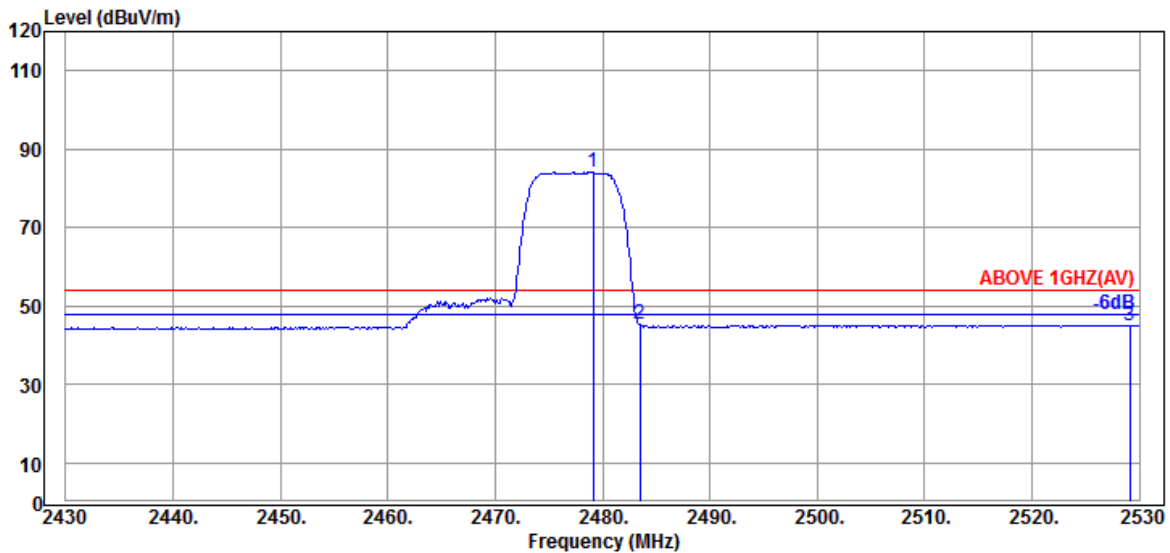


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	5.86	39.92	89.84	84.24	---	---	Average
2483.500	28.47	5.87	39.92	50.78	45.20	54.00	8.80	Average
2529.100	28.61	5.96	39.93	50.45	45.09	54.00	8.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

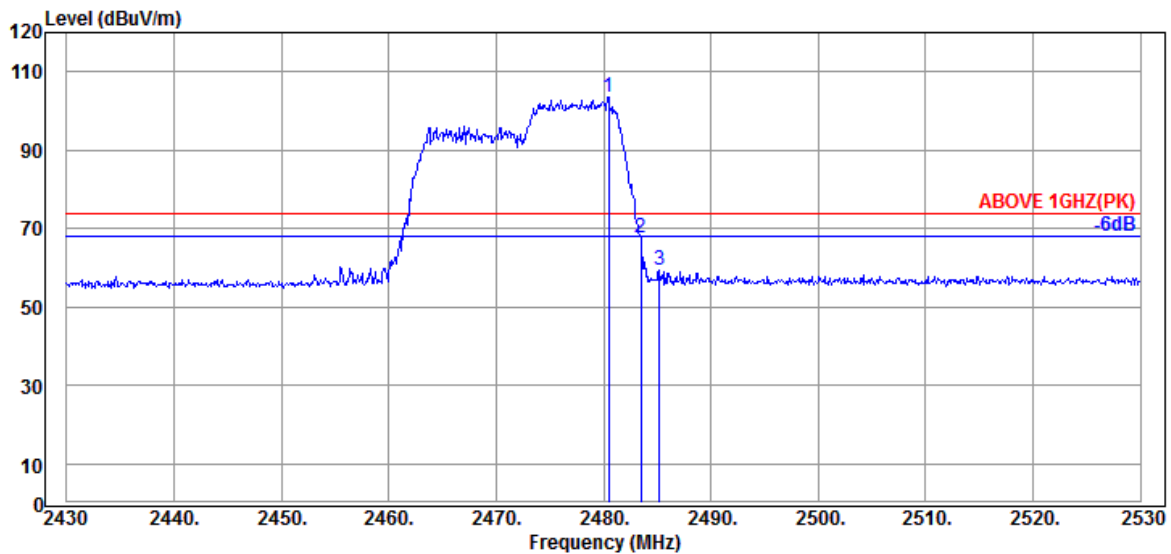

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	5.86	39.92	108.92	103.32	---	---	Peak
2483.500	28.47	5.87	39.92	73.34	67.76	74.00	6.24	Peak
2485.200	28.47	5.87	39.92	64.87	59.29	74.00	14.71	Peak

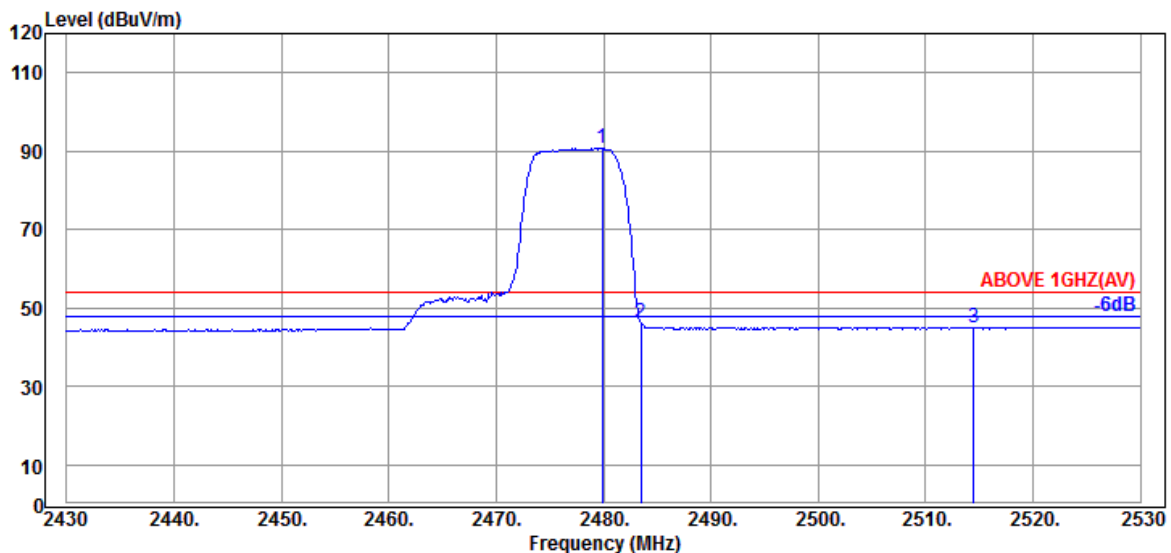


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	5.86	39.92	96.34	90.74	---	---	Average
2483.500	28.47	5.87	39.92	51.82	46.24	54.00	7.76	Average
2514.500	28.56	5.93	39.92	50.52	45.09	54.00	8.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

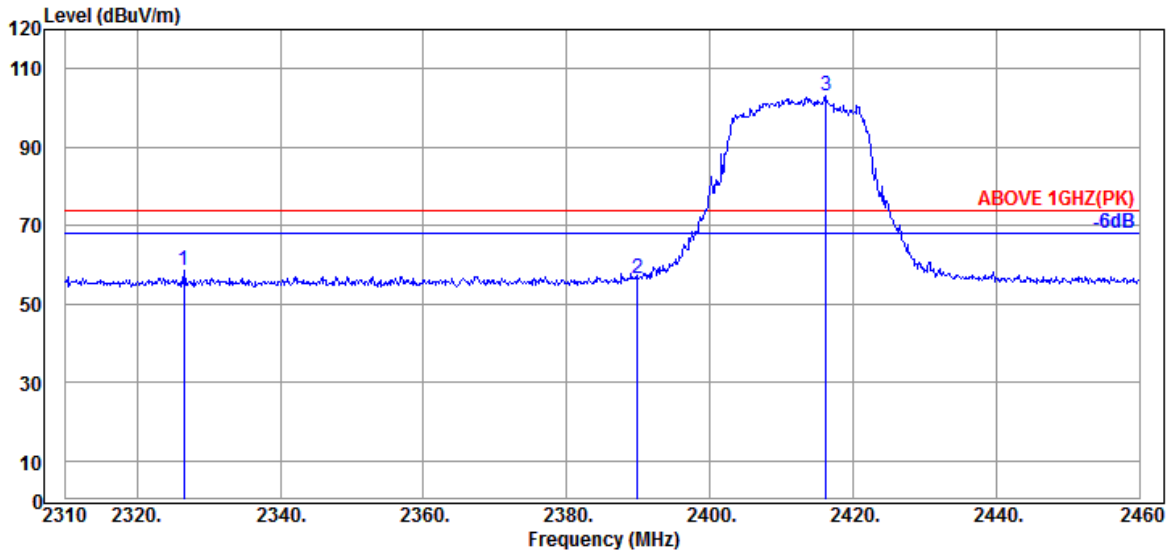

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2326.500	28.05	5.62	39.94	65.02	58.75	74.00	15.25	Peak
2389.950	28.20	5.72	39.93	62.54	56.53	74.00	17.47	Peak
@ 2416.200	28.26	5.76	39.93	108.98	103.07	---	---	Peak

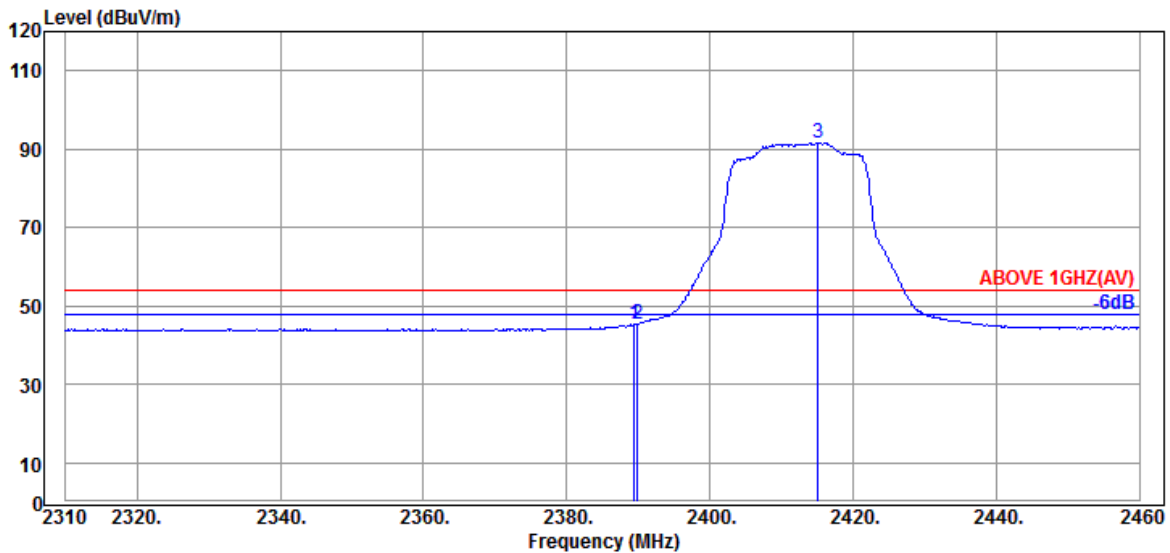


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.72	39.93	51.35	45.34	54.00	8.66	Average
2389.950	28.20	5.72	39.93	51.29	45.28	54.00	8.72	Average
@ 2415.150	28.26	5.76	39.93	97.54	91.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

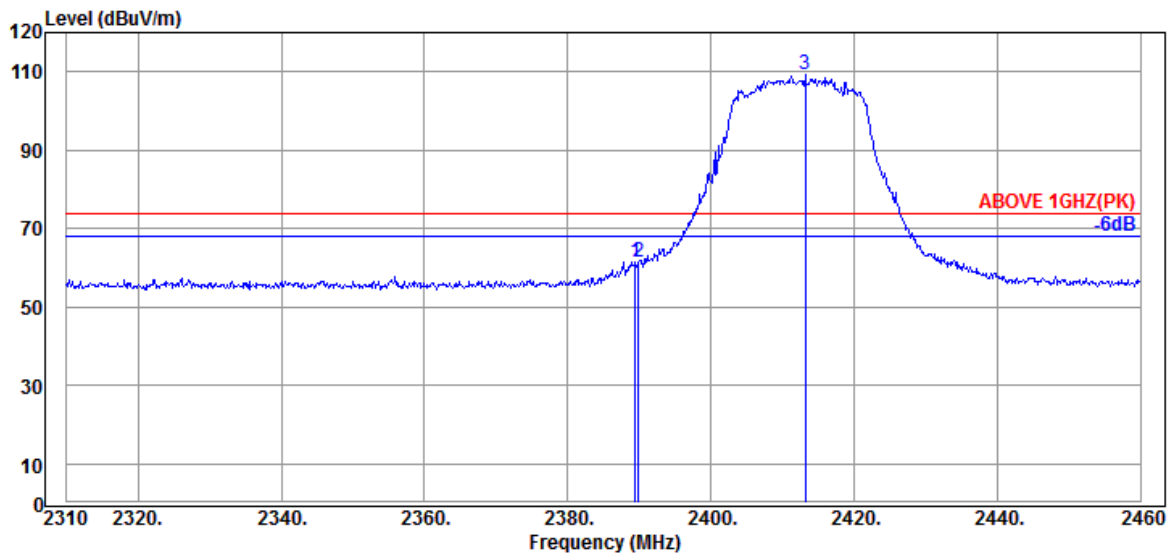

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.72	39.93	67.31	61.30	74.00	12.70	Peak
2389.950	28.20	5.72	39.93	67.29	61.28	74.00	12.72	Peak
@ 2413.200	28.26	5.76	39.93	115.27	109.36	---	---	Peak

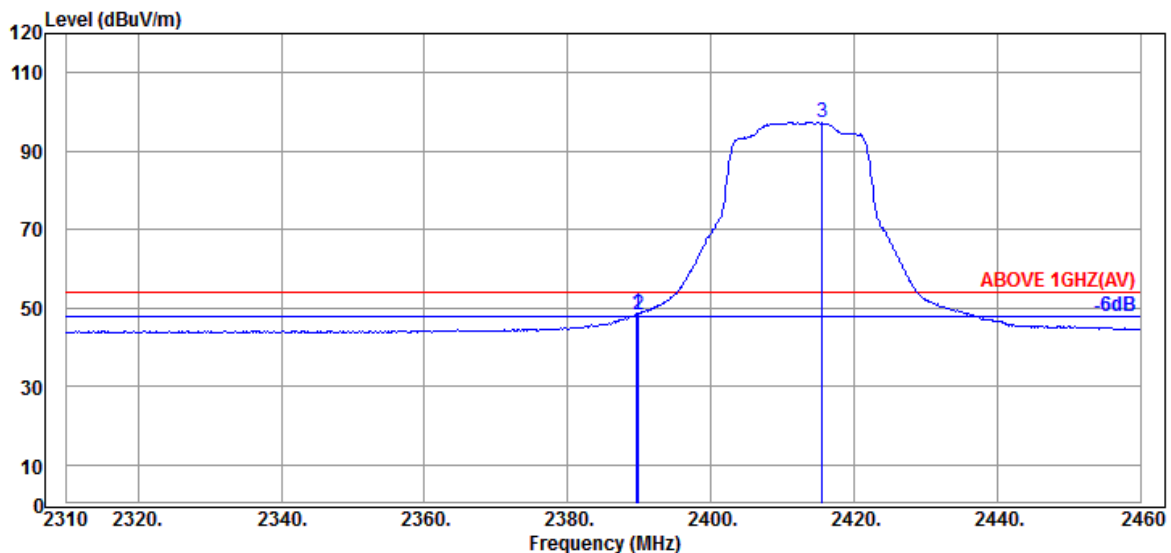


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.72	39.93	54.48	48.47	54.00	5.53	Average
2389.950	28.20	5.72	39.93	54.26	48.25	54.00	5.75	Average
@ 2415.600	28.26	5.76	39.93	103.24	97.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

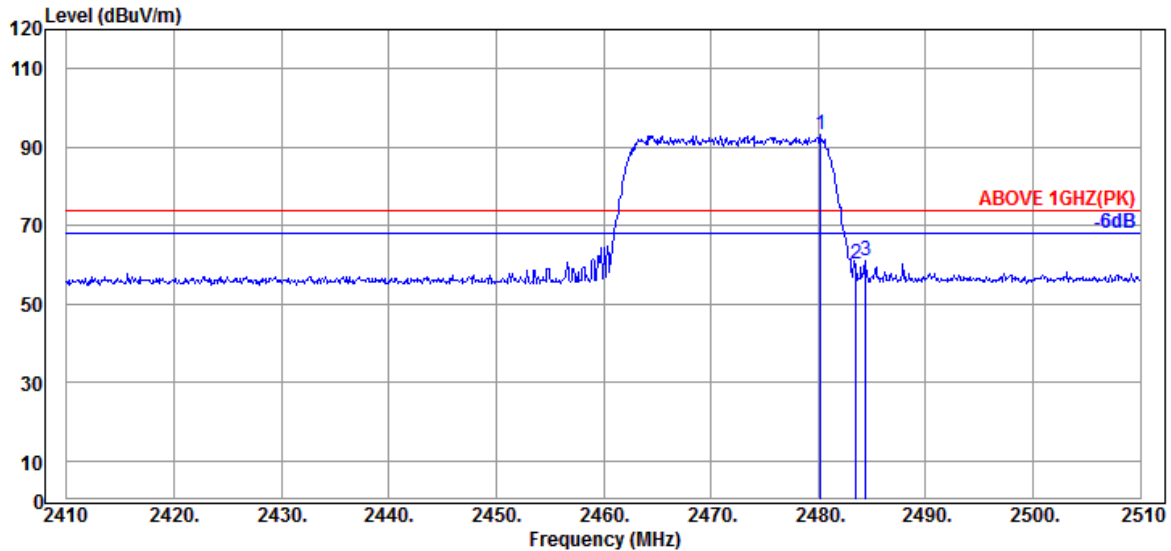

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	5.86	39.92	98.59	92.99	---	---	Peak
2483.500	28.47	5.87	39.92	65.70	60.12	74.00	13.88	Peak
2484.400	28.47	5.87	39.92	66.59	61.01	74.00	12.99	Peak

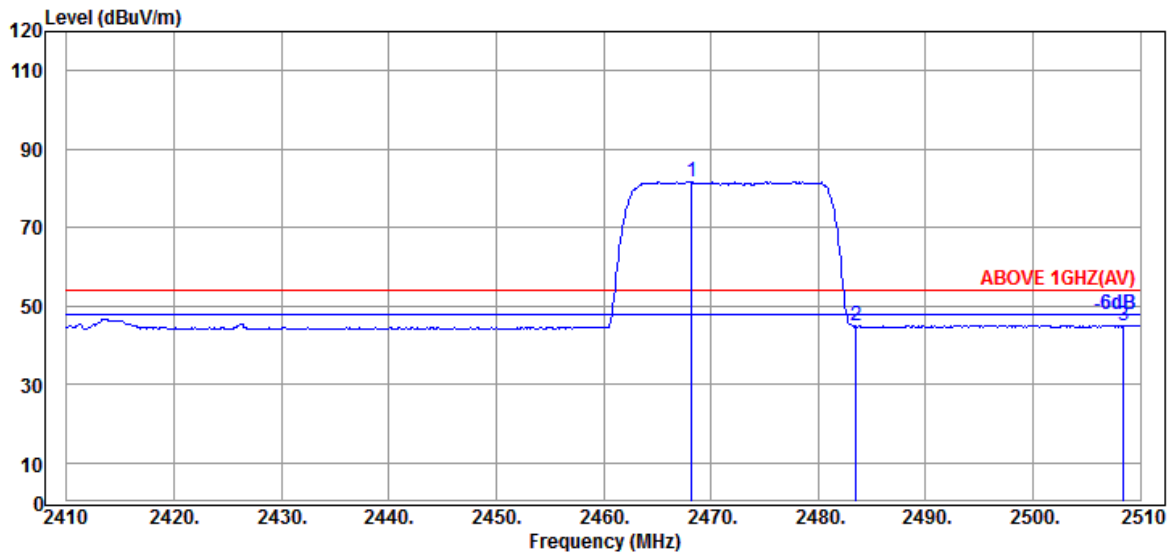


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	5.85	39.92	87.38	81.75	---	---	Average
2483.500	28.47	5.87	39.92	50.38	44.80	54.00	9.20	Average
2508.400	28.53	5.91	39.92	50.54	45.06	54.00	8.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

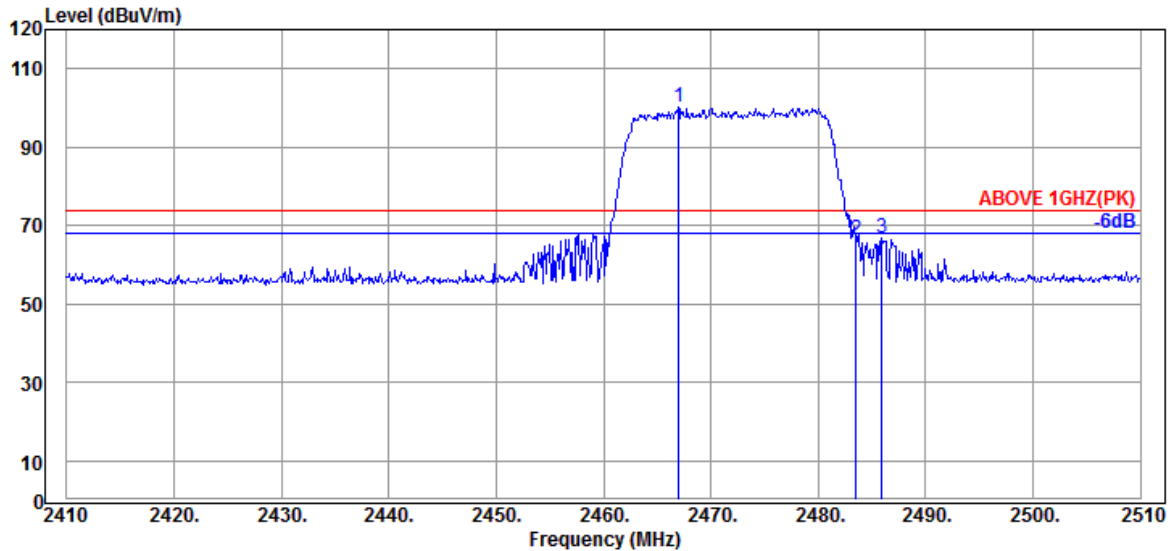

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	5.84	39.92	105.77	100.12	---	---	Peak
2483.500	28.47	5.87	39.92	71.95	66.37	74.00	7.63	Peak
2485.900	28.47	5.87	39.92	72.30	66.72	74.00	7.28	Peak

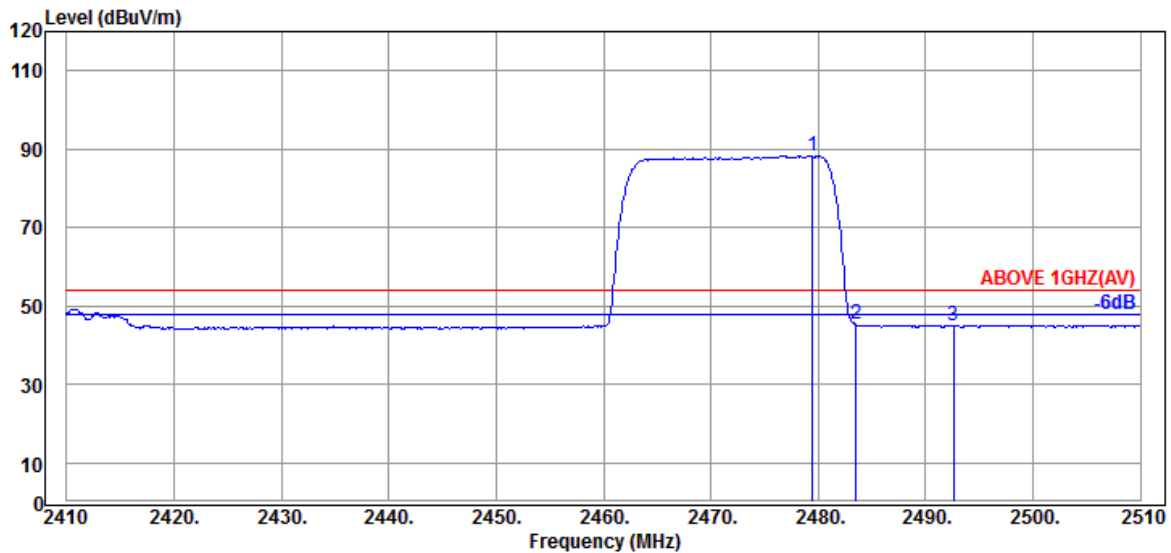


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	93.86	88.26	---	---	Average
2483.500	28.47	5.87	39.92	50.81	45.23	54.00	8.77	Average
2492.600	28.49	5.88	39.92	50.68	45.13	54.00	8.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

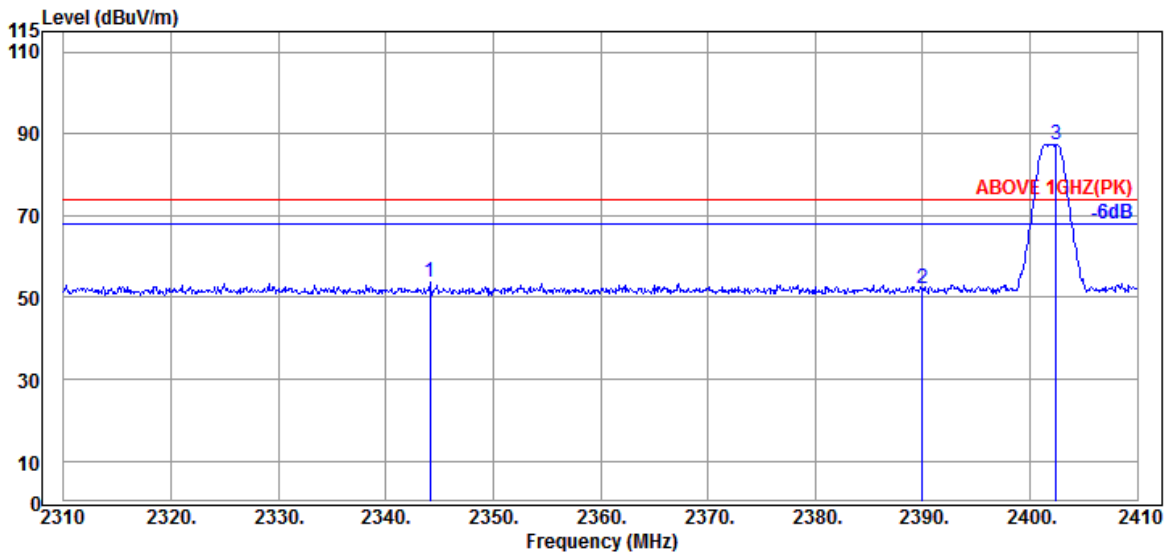

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.100	28.16	5.65	39.93	59.73	53.61	74.00	20.39	Peak
2390.000	28.20	5.72	39.93	58.25	52.24	74.00	21.76	Peak
@ 2402.400	28.20	5.74	39.93	93.42	87.43	---	---	Peak

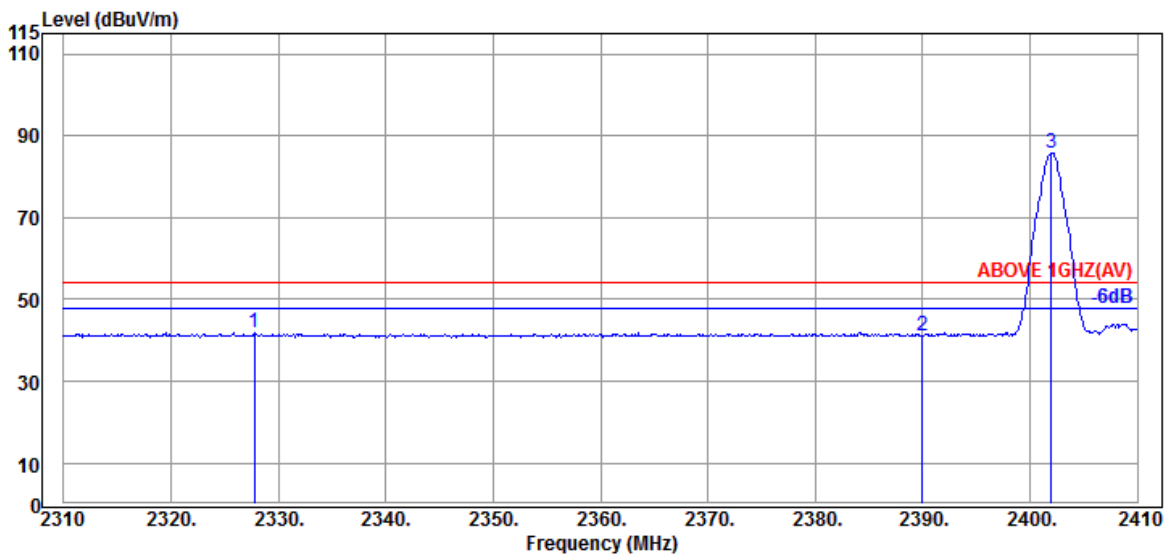


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.800	28.05	5.62	39.94	48.30	42.03	54.00	11.97	Average
2390.000	28.20	5.72	39.93	47.31	41.30	54.00	12.70	Average
@ 2402.000	28.20	5.74	39.93	91.86	85.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

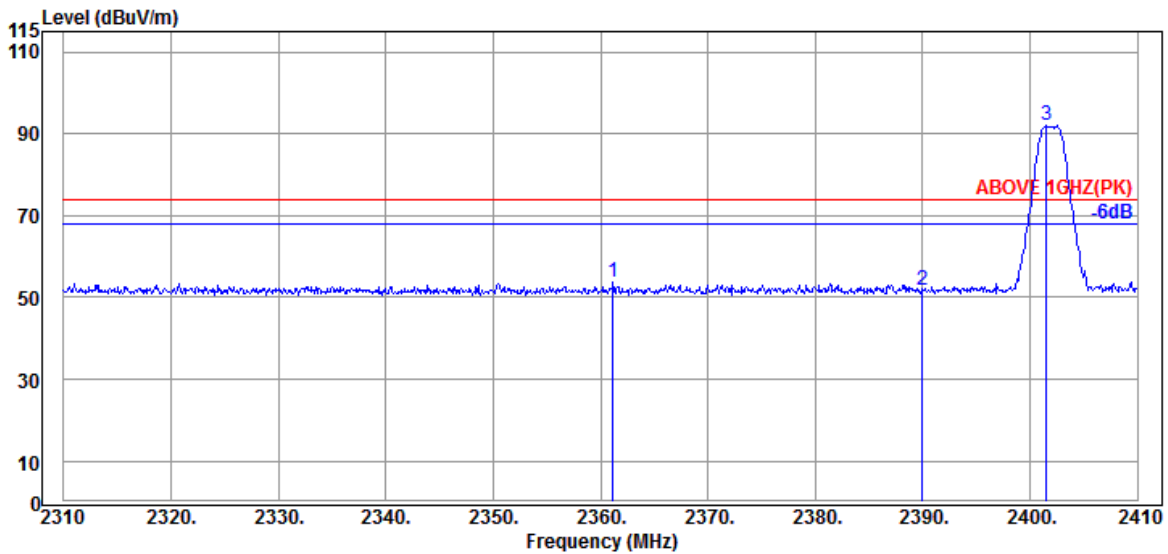

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.200	28.20	5.67	39.93	59.95	53.89	74.00	20.11	Peak
2390.000	28.20	5.72	39.93	57.66	51.65	74.00	22.35	Peak
@ 2401.500	28.20	5.74	39.93	97.88	91.89	---	---	Peak

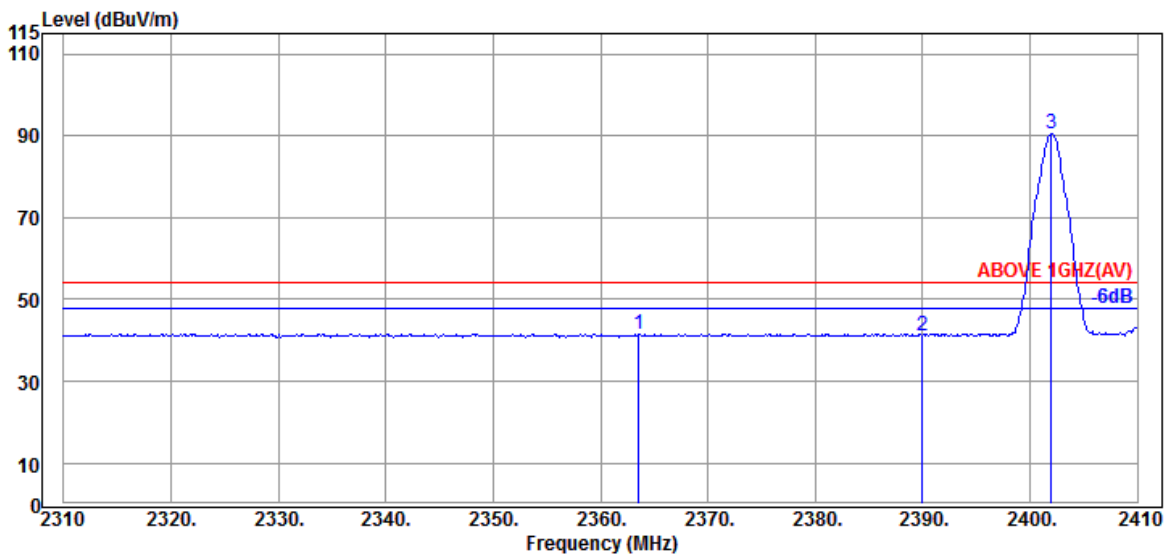


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.600	28.20	5.69	39.93	47.69	41.65	54.00	12.35	Average
2390.000	28.20	5.72	39.93	47.13	41.12	54.00	12.88	Average
@ 2402.000	28.20	5.74	39.93	96.43	90.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

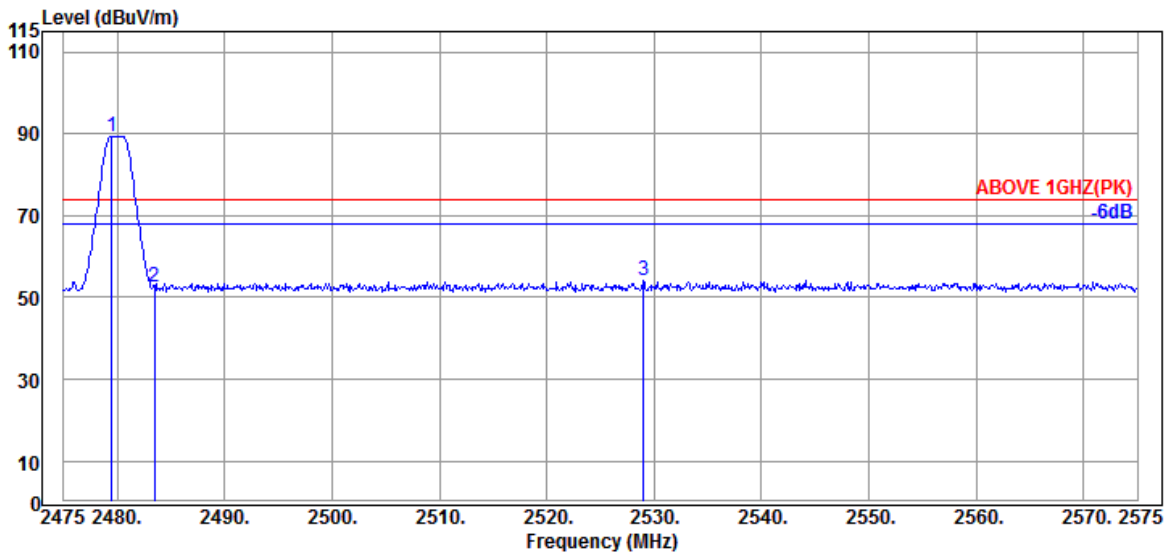

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	95.09	89.49	---	---	Peak
2483.500	28.47	5.87	39.92	58.29	52.71	74.00	21.29	Peak
2529.000	28.61	5.96	39.93	59.47	54.11	74.00	19.89	Peak

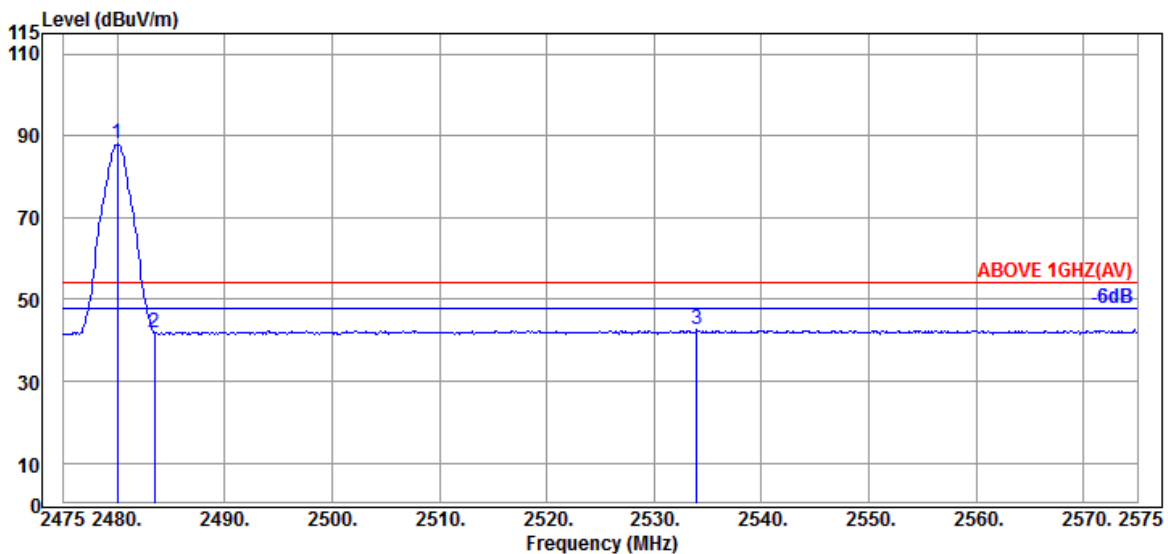


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	93.57	87.97	---	---	Average
2483.500	28.47	5.87	39.92	47.40	41.82	54.00	12.18	Average
2534.000	28.64	5.98	39.93	47.85	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

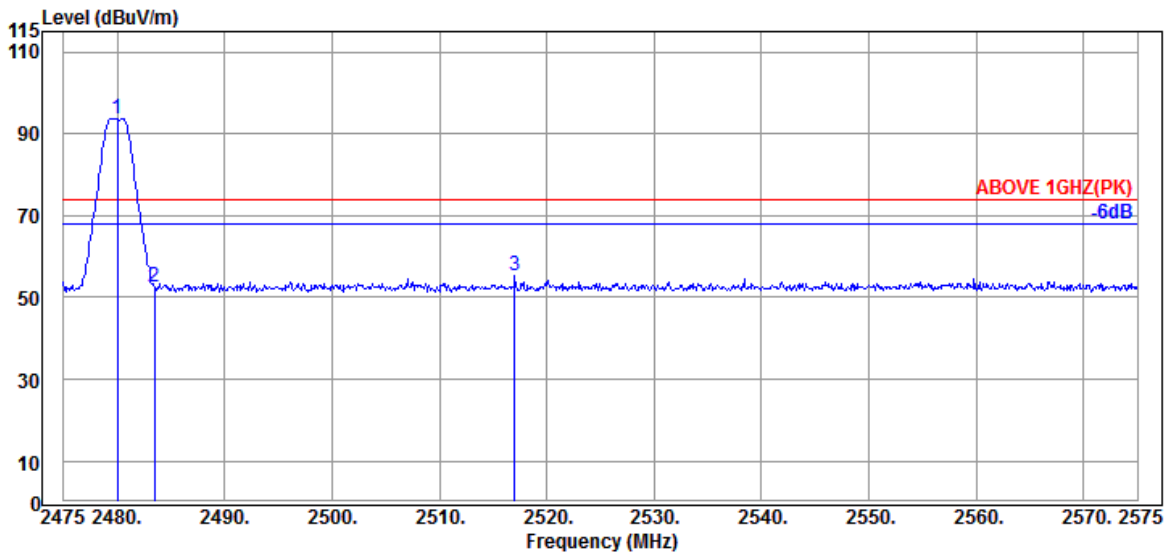

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	99.32	93.72	---	---	Peak
2483.500	28.47	5.87	39.92	58.20	52.62	74.00	21.38	Peak
2517.000	28.56	5.93	39.93	60.59	55.15	74.00	18.85	Peak

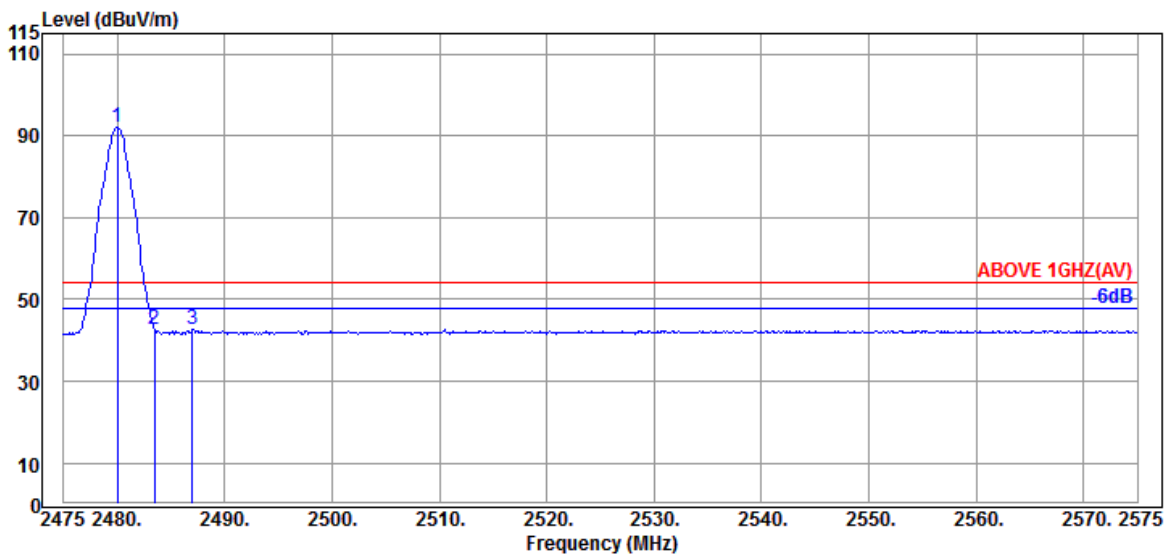

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	97.83	92.23	---	---	Average
2483.500	28.47	5.87	39.92	48.19	42.61	54.00	11.39	Average
2487.000	28.47	5.87	39.92	48.17	42.59	54.00	11.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.18	41.67	54.00	12.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.48	40.97	54.00	13.03	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.16	40.65	54.00	13.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.46	40.95	54.00	13.05	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.30	40.79	54.00	13.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.12	40.61	54.00	13.39	Peak

Mode	802.11n-HT40				Frequency	TX 2442MHz		
------	--------------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.48	40.97	54.00	13.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.19	40.68	54.00	13.32	Peak

Mode	802.11ax-HE20				Frequency	TX 2442MHz		
------	---------------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.05	40.54	54.00	13.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	37.79	40.28	54.00	13.72	Peak

Mode	802.11ax-HE40				Frequency	TX 2442MHz		
------	---------------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.29	40.78	54.00	13.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.85	41.34	54.00	12.66	Peak

Mode		BLE (2M)			Frequency		TX 2402MHz	
------	--	----------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4804.000	33.10	8.53	39.39	39.49	41.73	54.00	12.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4804.000	33.10	8.53	39.39	39.94	42.18	54.00	11.82	Peak

Mode		BLE (2M)			Frequency		TX 2440MHz	
------	--	----------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	38.22	40.69	54.00	13.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	38.57	41.04	54.00	12.96	Peak

Mode		BLE (2M)			Frequency		TX 2480MHz	
------	--	----------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	33.38	8.74	39.31	38.48	41.29	54.00	12.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	33.38	8.74	39.31	39.12	41.93	54.00	12.07	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.