

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	153
A.2.3 Emissions in Non-restricted Frequency Bands.....	168
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	169
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	169
A.3.2 Measurement Plots	176
A.4 POWER SPECTRAL DENSITY	232
A.4.1 Power Spectral Density Result	232
A.4.2 Measurement Plots	239
A.5 FREQUENCY STABILITY	280
A.5.1 Frequency stability Result	280

A.1 CONDUCTED EMISSION

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

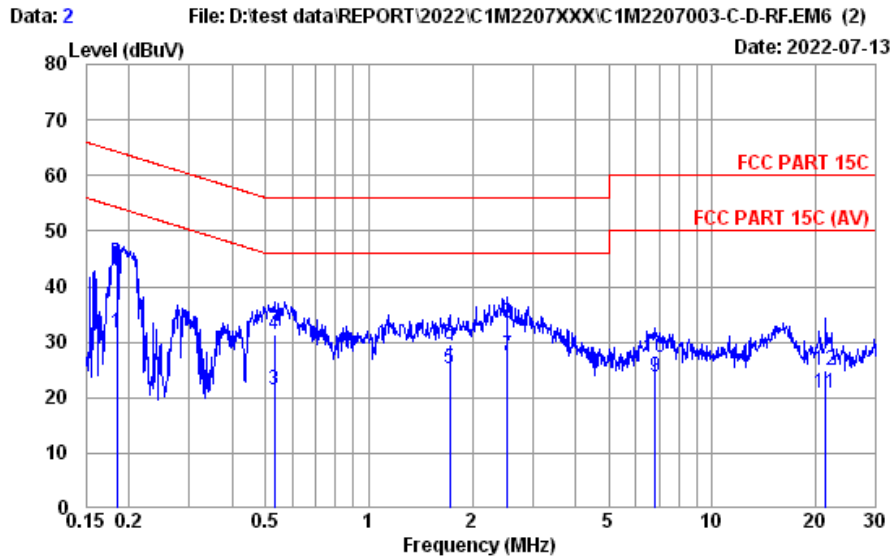


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: I6ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.184	10.33	0.03	9.85	11.43	31.64	54.28	22.64	Average
2	0.184	10.33	0.03	9.85	23.90	44.11	64.28	20.17	QP
3	0.529	10.33	0.03	9.85	1.06	21.27	46.00	24.73	Average
4	0.529	10.33	0.03	9.85	11.13	31.34	56.00	24.66	QP
5	1.716	10.36	0.05	9.86	4.87	25.14	46.00	20.86	Average
6	1.716	10.36	0.05	9.86	9.26	29.53	56.00	26.47	QP
7	2.527	10.37	0.07	9.86	7.20	27.50	46.00	18.50	Average
8	2.527	10.37	0.07	9.86	13.15	33.45	56.00	22.55	QP
9	6.805	10.53	0.11	9.87	3.16	23.67	50.00	26.33	Average
10	6.805	10.53	0.11	9.87	6.79	27.30	60.00	32.70	QP
11	21.373	11.10	0.20	9.95	-0.52	20.73	50.00	29.27	Average
12	21.373	11.10	0.20	9.95	3.77	25.02	60.00	34.98	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

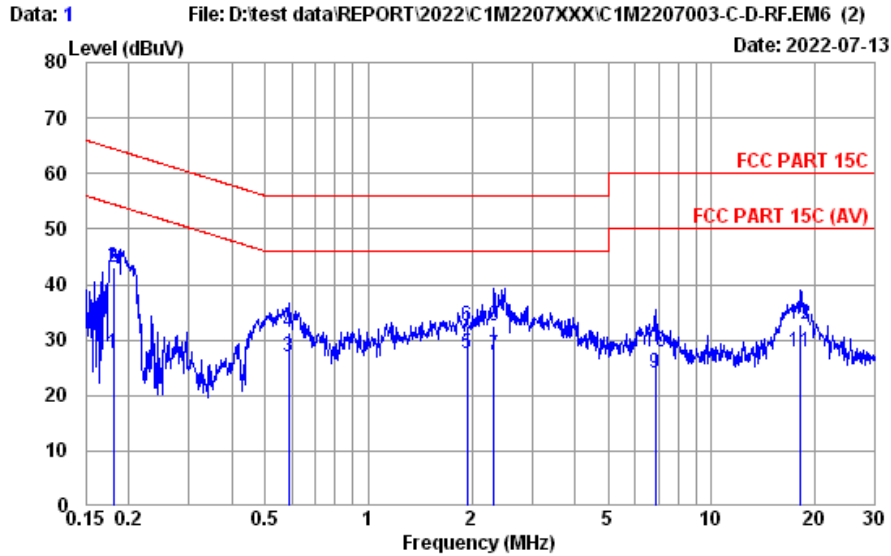

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: LINE
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 16ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.181	10.22	0.03	9.85	7.52	27.62	54.46	26.84	Average
2	0.181	10.22	0.03	9.85	23.09	43.19	64.46	21.27	QP
3	0.585	10.22	0.03	9.85	6.73	26.83	46.00	19.17	Average
4	0.585	10.22	0.03	9.85	11.16	31.26	56.00	24.74	QP
5	1.939	10.25	0.06	9.86	7.31	27.48	46.00	18.52	Average
6	1.939	10.25	0.06	9.86	12.30	32.47	56.00	23.53	QP
7	2.321	10.26	0.07	9.86	7.06	27.25	46.00	18.75	Average
8	2.321	10.26	0.07	9.86	12.29	32.48	56.00	23.52	QP
9	6.841	10.36	0.11	9.87	3.65	23.99	50.00	26.01	Average
10	6.841	10.36	0.11	9.87	7.47	27.81	60.00	32.19	QP
11	18.039	10.61	0.18	9.93	7.13	27.85	50.00	22.15	Average
12	18.039	10.61	0.18	9.93	12.18	32.90	60.00	27.10	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/07/04~13	Temp./Hum.	23~24°C/59~65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	29.31	26.83	40.00	13.17	Peak
193.930	15.06	3.64	25.81	42.45	35.34	43.50	8.16	Peak
217.210	16.27	3.91	25.75	41.51	35.94	46.00	10.06	Peak
540.220	23.61	6.90	27.24	31.84	35.11	46.00	10.89	Peak
865.170	26.18	8.58	27.08	29.19	36.87	46.00	9.13	Peak
984.480	27.02	9.22	26.69	27.83	37.38	54.00	16.62	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.65	1.41	26.49	38.46	37.03	40.00	2.97	Peak
33.880	22.12	1.51	26.48	39.44	36.59	40.00	3.41	Peak
192.960	15.06	3.64	25.81	42.85	35.74	43.50	7.76	Peak
420.910	21.78	6.11	26.59	31.69	32.99	46.00	13.01	Peak
540.220	23.61	6.90	27.24	31.30	34.57	46.00	11.43	Peak
975.750	26.94	9.17	26.72	27.98	37.37	54.00	16.63	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

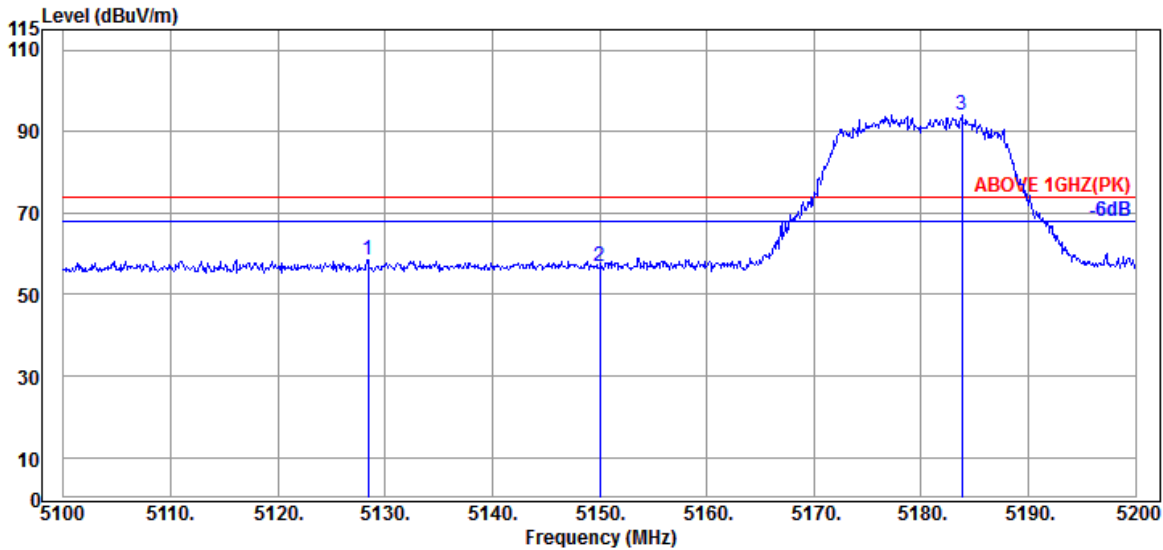

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.400	33.70	8.88	39.29	55.37	58.66	74.00	15.34	Peak
5150.000	33.70	8.88	39.29	53.58	56.87	74.00	17.13	Peak
@ 5183.800	33.83	8.90	39.28	90.76	94.21	---	---	Peak

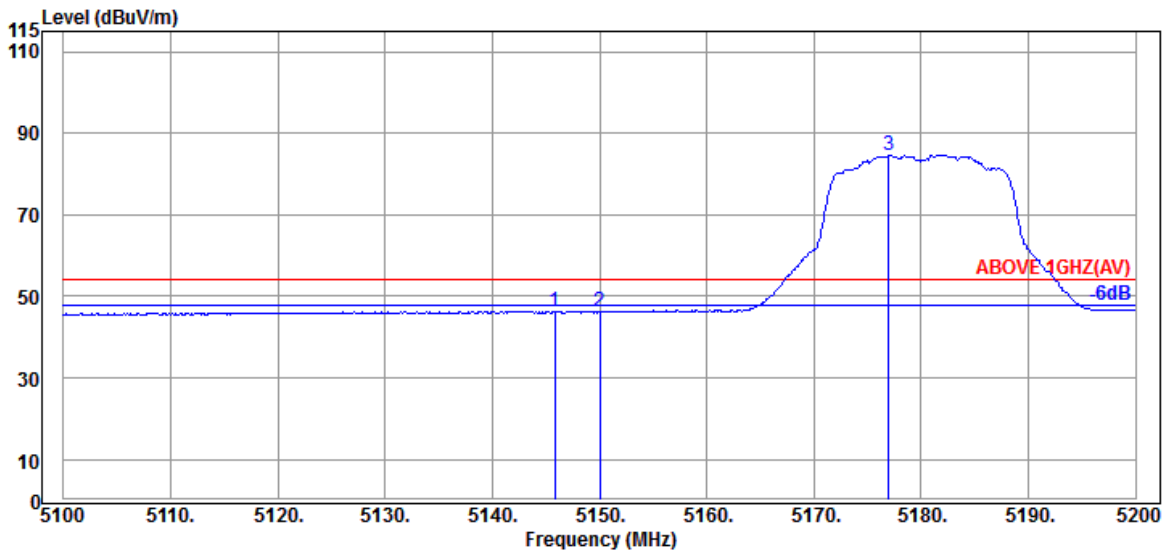


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.800	33.70	8.88	39.29	43.01	46.30	54.00	7.70	Average
5150.000	33.70	8.88	39.29	43.01	46.30	54.00	7.70	Average
@ 5177.000	33.83	8.90	39.28	81.15	84.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

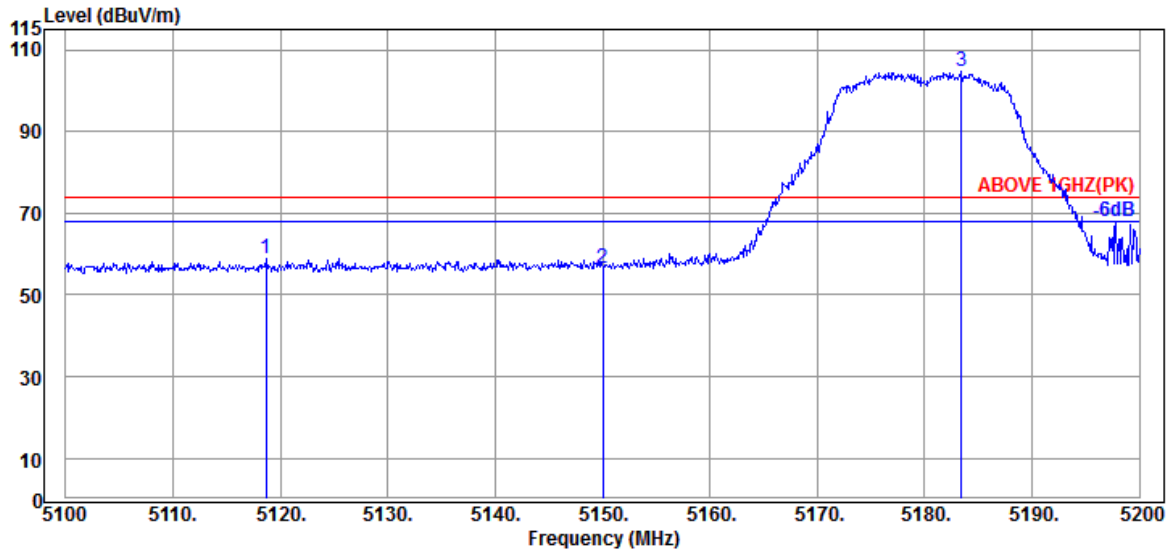

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.700	33.70	8.87	39.29	55.75	59.03	74.00	14.97	Peak
5150.000	33.70	8.88	39.29	53.10	56.39	74.00	17.61	Peak
@ 5183.400	33.83	8.90	39.28	101.14	104.59	---	---	Peak

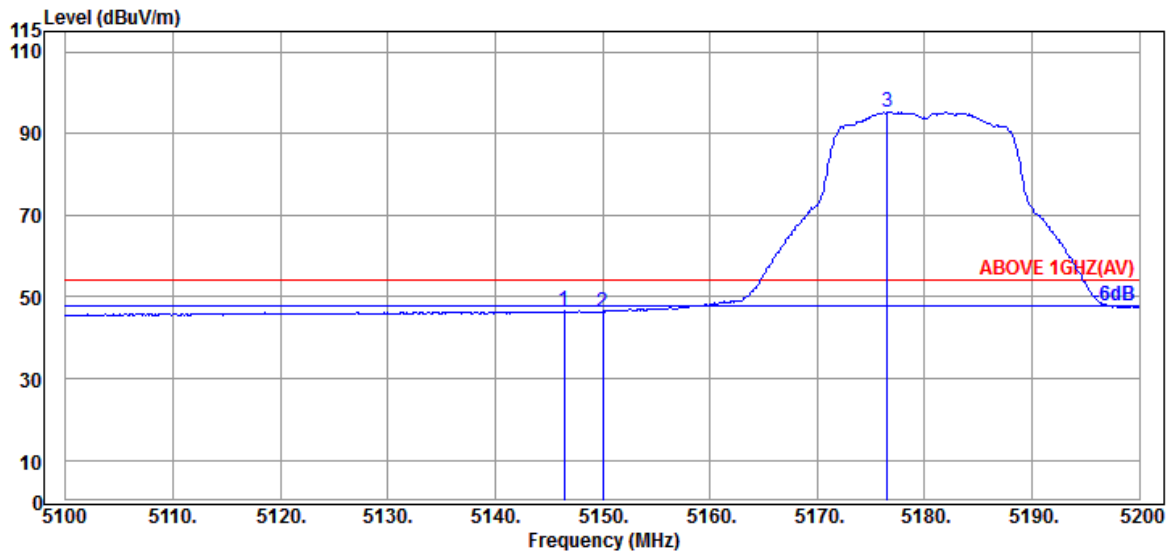


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.400	33.70	8.88	39.29	43.19	46.48	54.00	7.52	Average
5150.000	33.70	8.88	39.29	43.10	46.39	54.00	7.61	Average
@ 5176.500	33.83	8.90	39.28	91.91	95.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

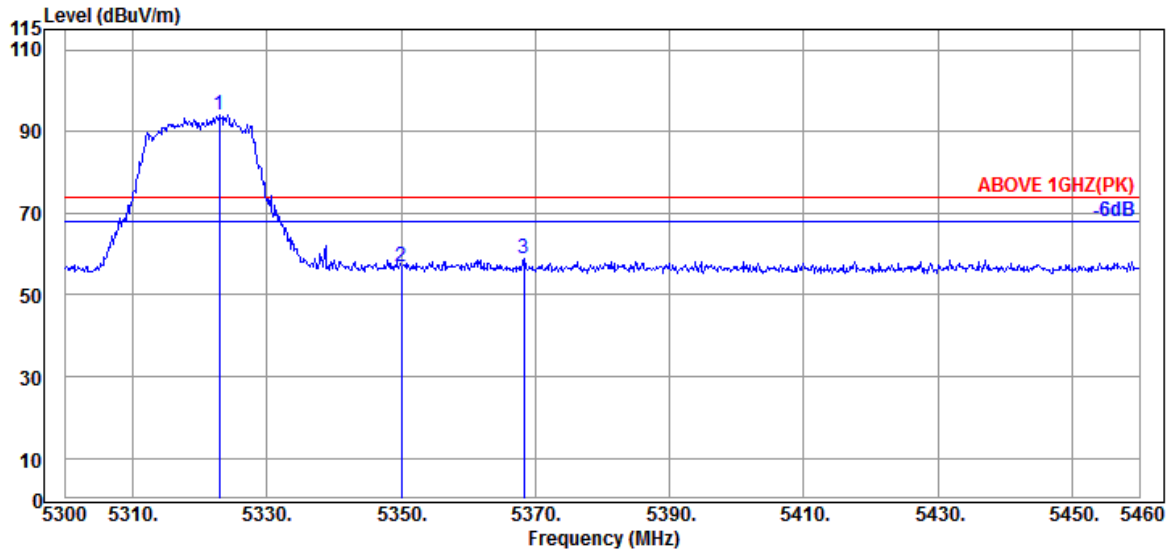

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.880	33.93	8.98	39.27	90.61	94.25	---	---	Peak
5350.080	34.00	8.99	39.27	53.10	56.82	74.00	17.18	Peak
5368.320	34.07	9.00	39.27	55.02	58.82	74.00	15.18	Peak

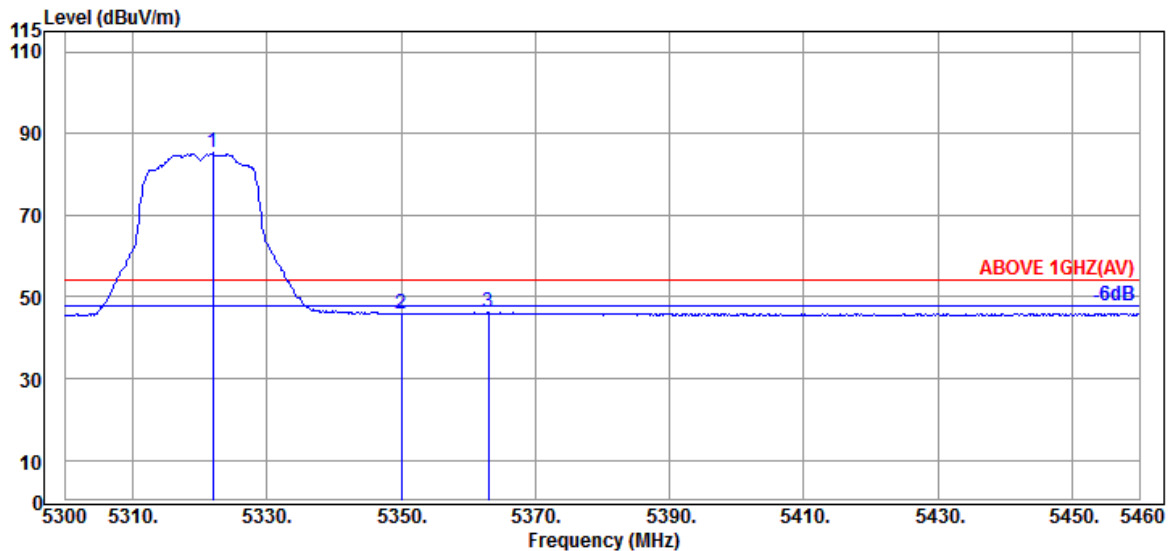


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	33.93	8.98	39.27	81.55	85.19	---	---	Average
5350.080	34.00	8.99	39.27	42.20	45.92	54.00	8.08	Average
5363.040	34.07	9.00	39.27	42.38	46.18	54.00	7.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

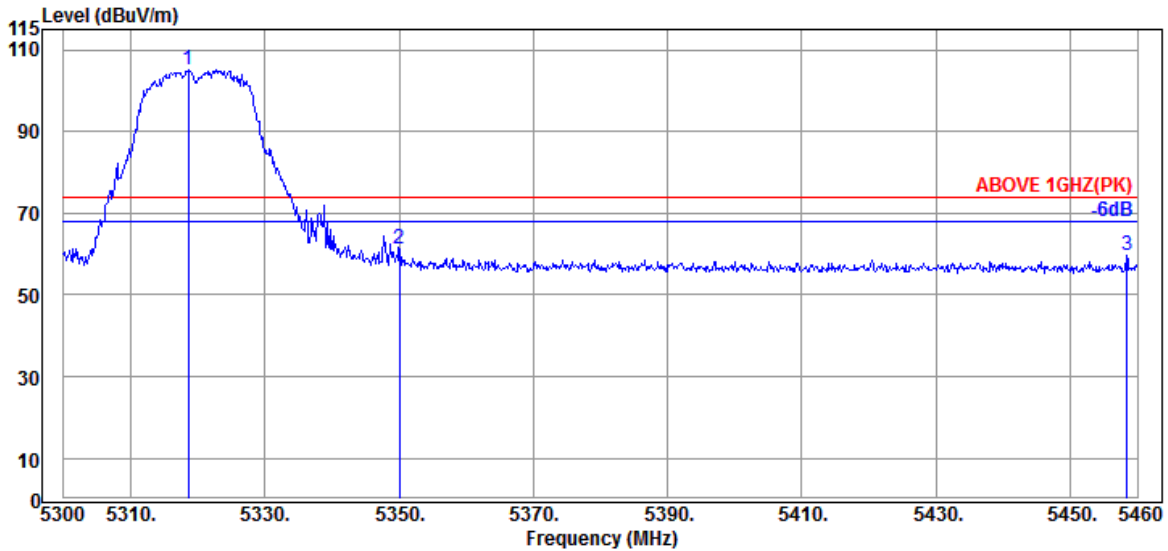

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	33.93	8.98	39.27	101.55	105.19	---	---	Peak
5350.080	34.00	8.99	39.27	57.37	61.09	74.00	12.91	Peak
5458.400	34.20	9.05	39.26	55.72	59.71	74.00	14.29	Peak

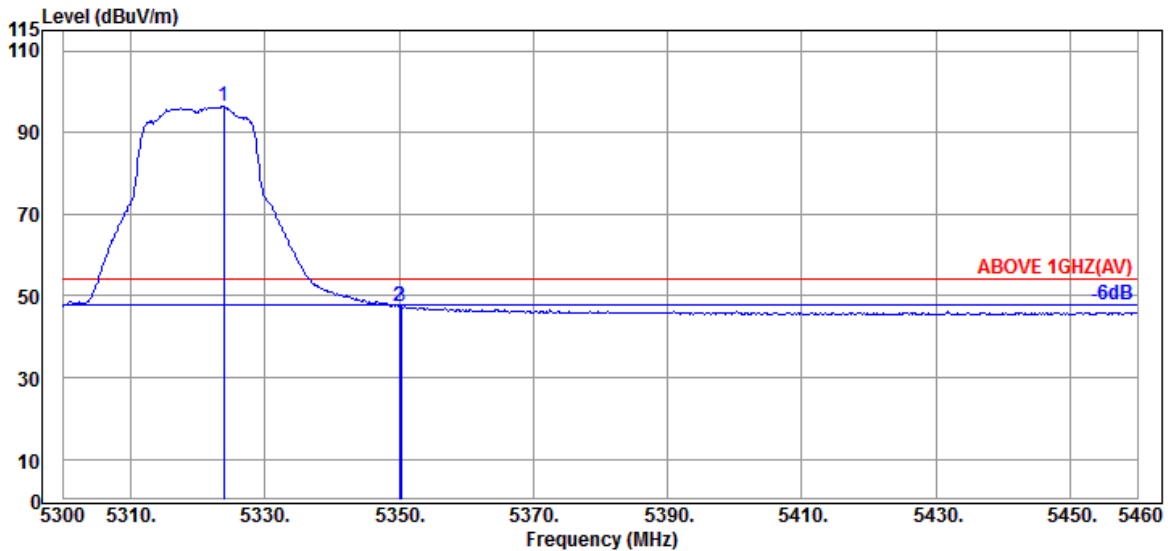


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	33.97	8.99	39.27	92.73	96.42	---	---	Average
5350.080	34.00	8.99	39.27	43.75	47.47	54.00	6.53	Average
5350.240	34.00	8.99	39.27	43.63	47.35	54.00	6.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

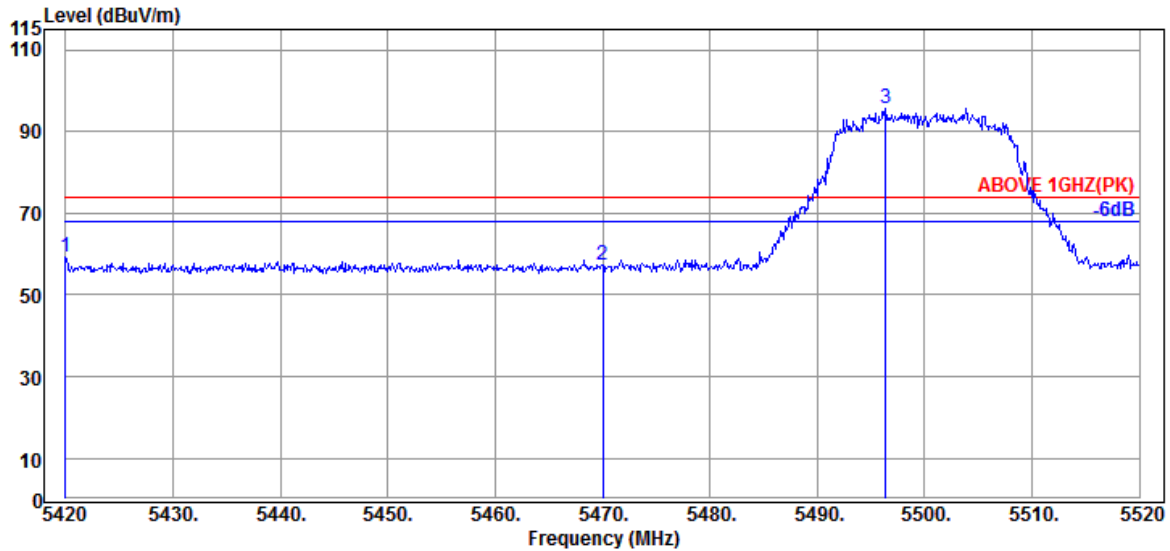

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.000	34.20	9.04	39.27	55.25	59.22	74.00	14.78	Peak
5470.000	34.17	9.06	39.26	53.50	57.47	74.00	16.53	Peak
@ 5496.400	34.10	9.08	39.26	91.86	95.78	---	---	Peak

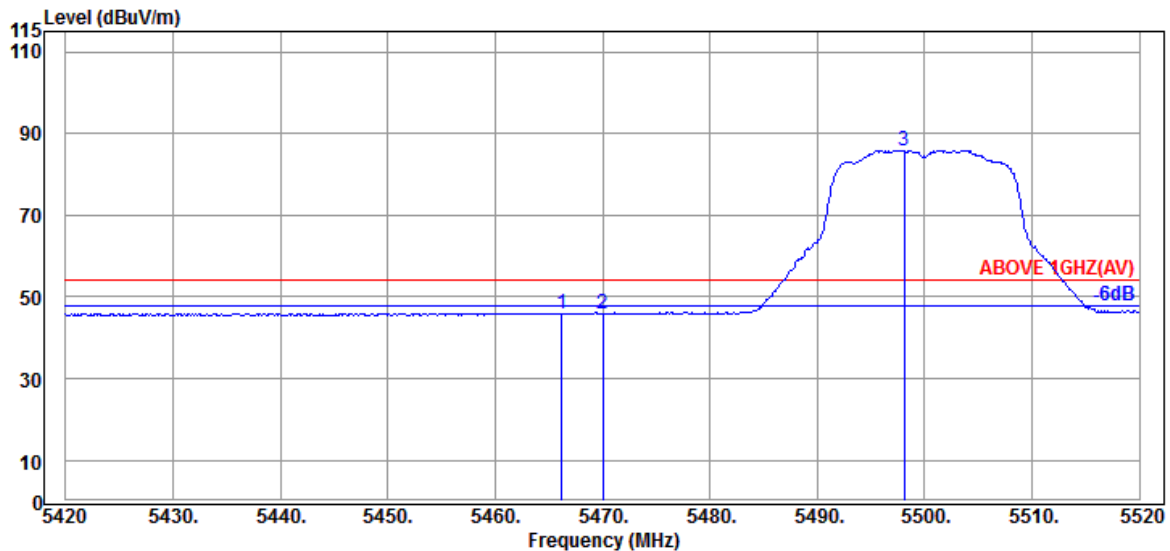


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	9.06	39.26	42.07	46.04	54.00	7.96	Average
5470.000	34.17	9.06	39.26	41.88	45.85	54.00	8.15	Average
@ 5498.100	34.10	9.08	39.26	81.98	85.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

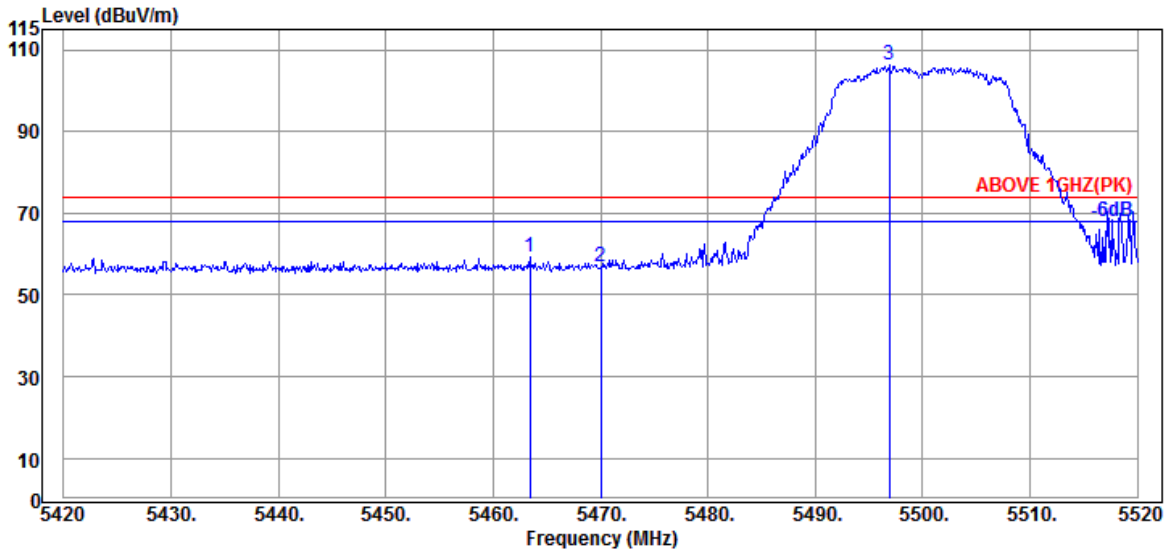

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.20	9.05	39.26	55.11	59.10	74.00	14.90	Peak
5470.000	34.17	9.06	39.26	52.94	56.91	74.00	17.09	Peak
@ 5496.900	34.10	9.08	39.26	102.20	106.12	---	---	Peak

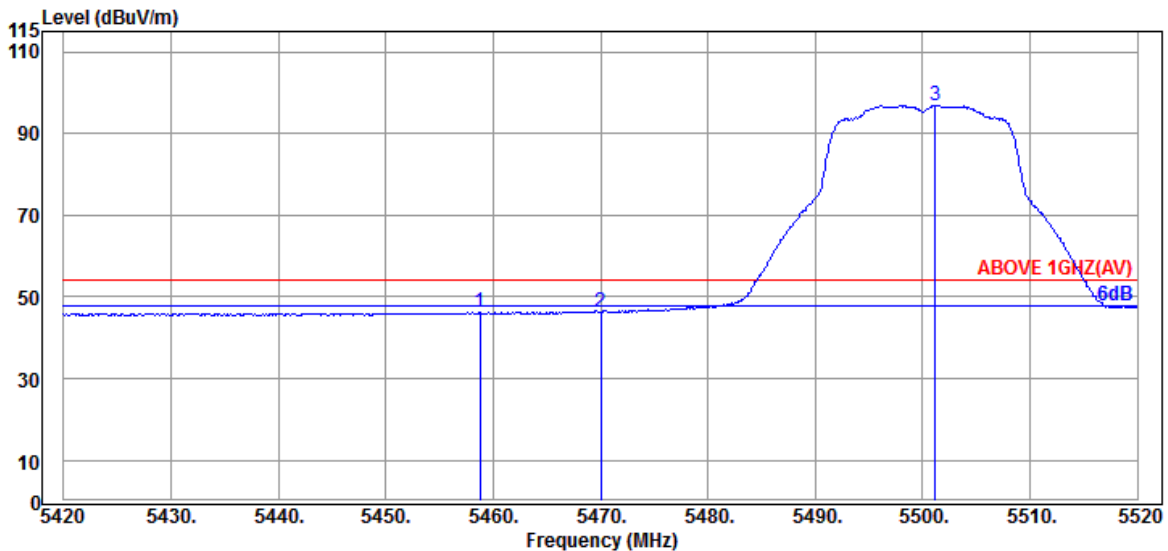


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.800	34.20	9.05	39.26	42.31	46.30	54.00	7.70	Average
5470.000	34.17	9.06	39.26	42.42	46.39	54.00	7.61	Average
@ 5501.200	34.10	9.08	39.26	92.99	96.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

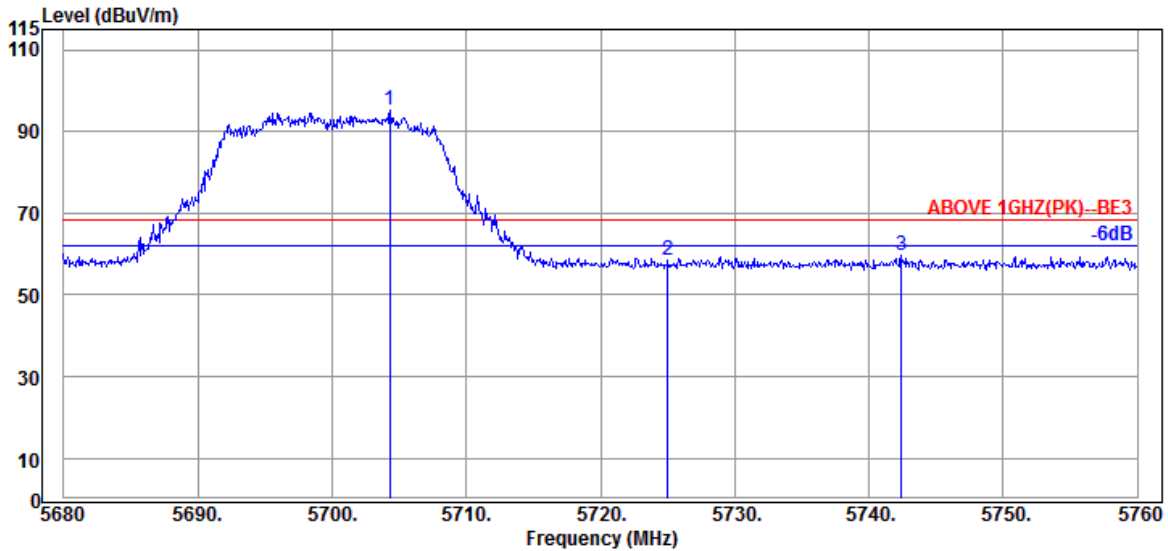

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.320	33.90	9.18	39.30	91.42	95.20	---	---	Peak
5725.040	33.90	9.20	39.30	54.53	58.33	68.20	9.87	Peak
5742.400	33.90	9.20	39.31	55.91	59.70	68.20	8.50	Peak

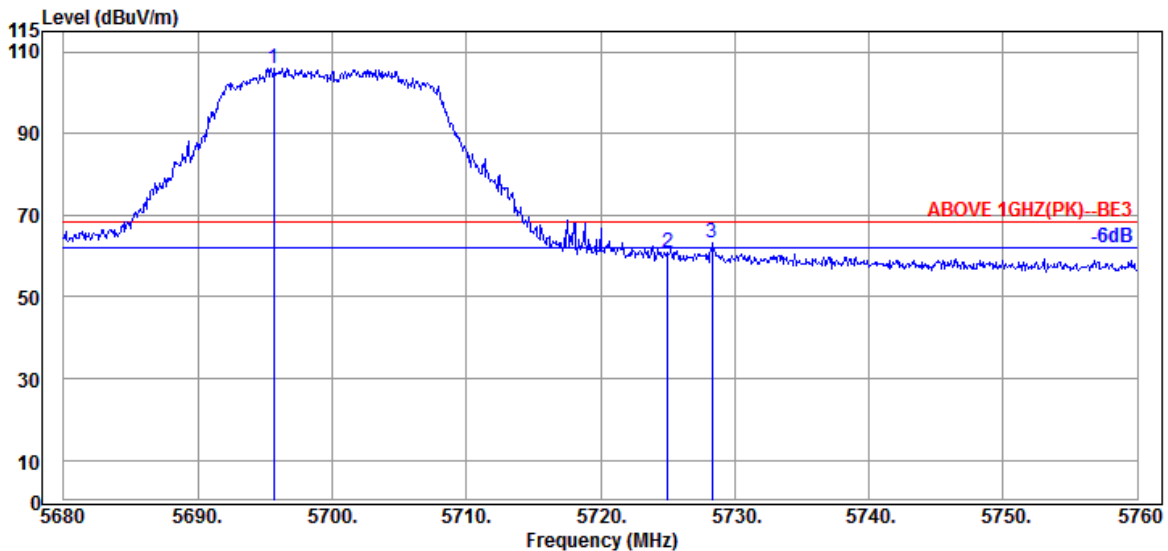


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.680	33.90	9.18	39.30	102.31	106.09	---	---	Peak
5725.040	33.90	9.20	39.30	56.90	60.70	68.20	7.50	Peak
5728.320	33.90	9.20	39.31	59.62	63.41	68.20	4.79	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

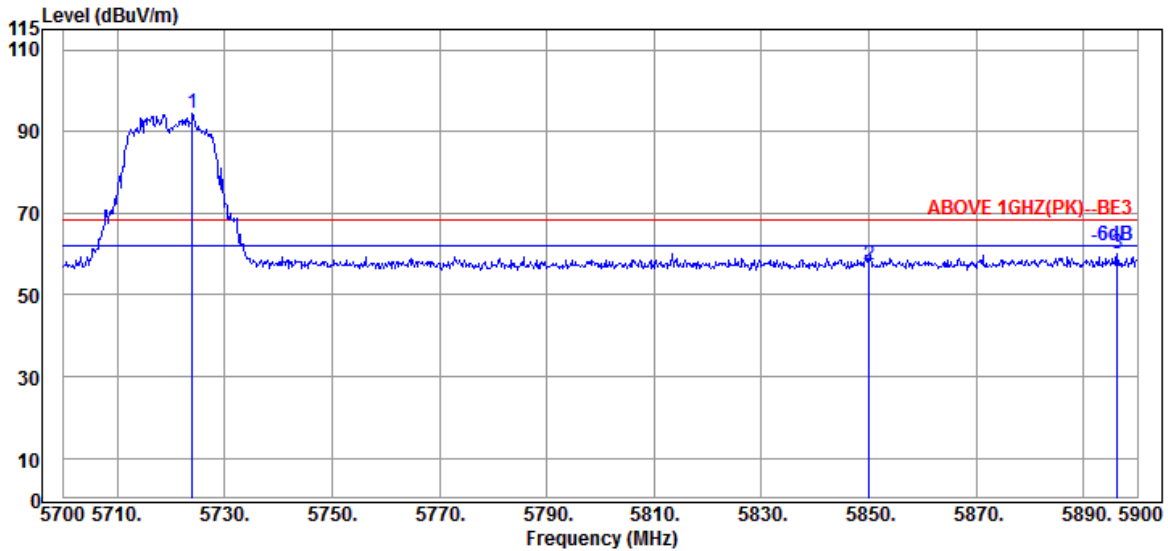

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	33.90	9.20	39.30	90.63	94.43	---	---	Peak
5850.000	34.00	9.25	39.33	53.19	57.11	68.20	11.09	Peak
5896.200	34.10	9.28	39.34	55.95	59.99	68.20	8.21	Peak

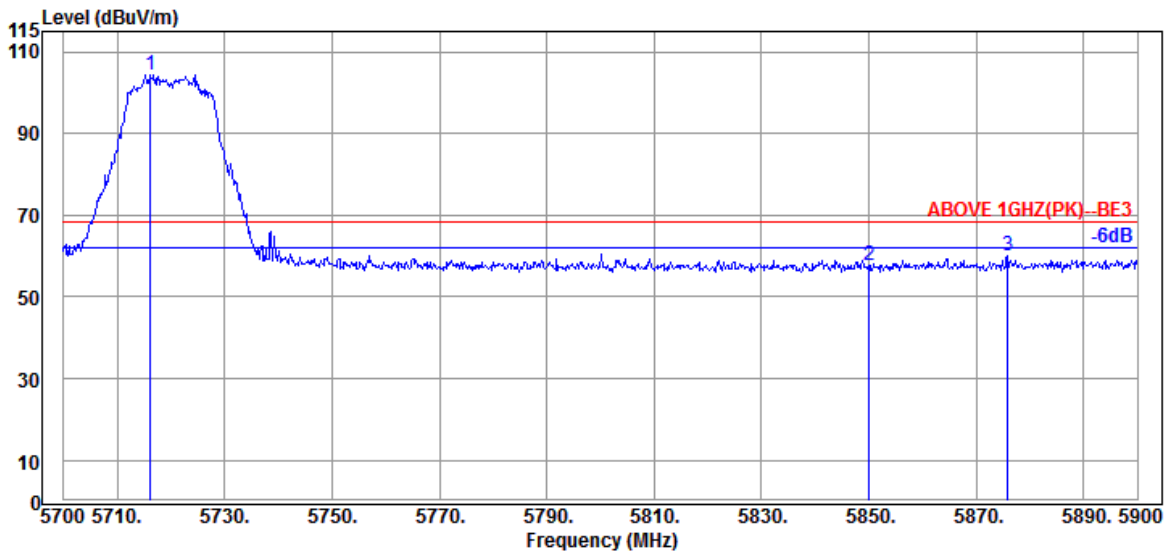


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.200	33.90	9.19	39.30	100.55	104.34	---	---	Peak
5850.000	34.00	9.25	39.33	53.79	57.71	68.20	10.49	Peak
5875.800	34.07	9.27	39.33	55.92	59.93	68.20	8.27	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

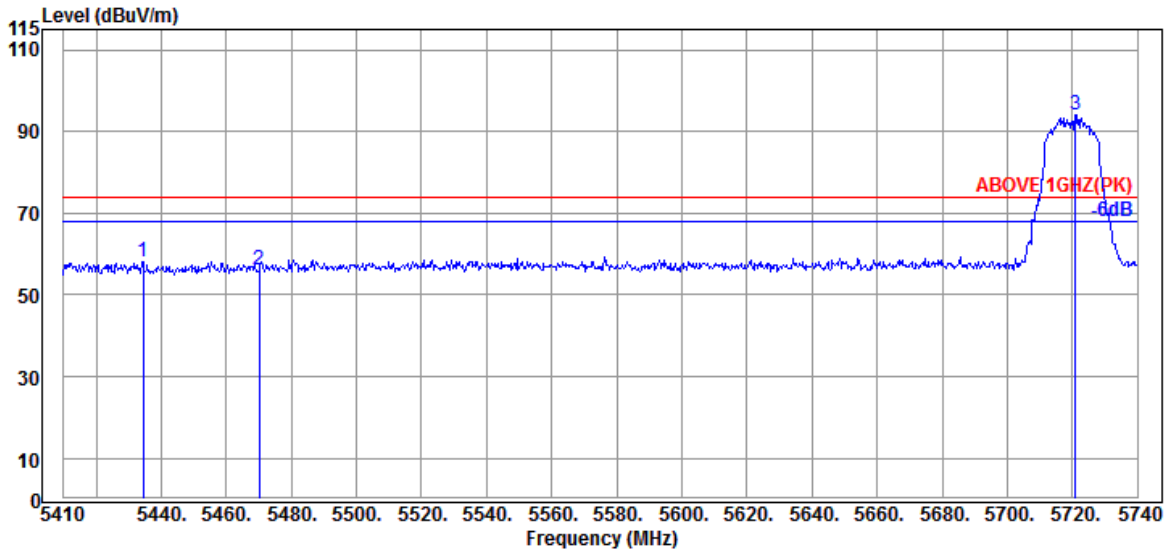

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.420	34.20	9.04	39.26	54.19	58.17	74.00	15.83	Peak
5470.060	34.17	9.06	39.26	52.20	56.17	74.00	17.83	Peak
@ 5720.860	33.90	9.19	39.30	90.37	94.16	---	---	Peak

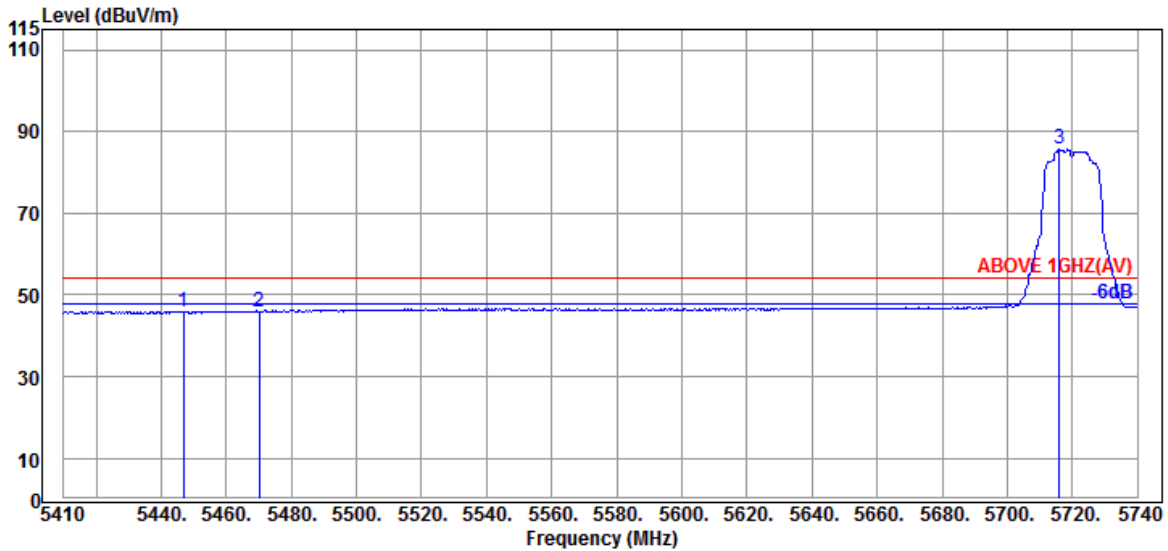


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.960	34.20	9.04	39.26	42.01	45.99	54.00	8.01	Average
5470.060	34.17	9.06	39.26	41.89	45.86	54.00	8.14	Average
@ 5715.910	33.90	9.19	39.30	81.82	85.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

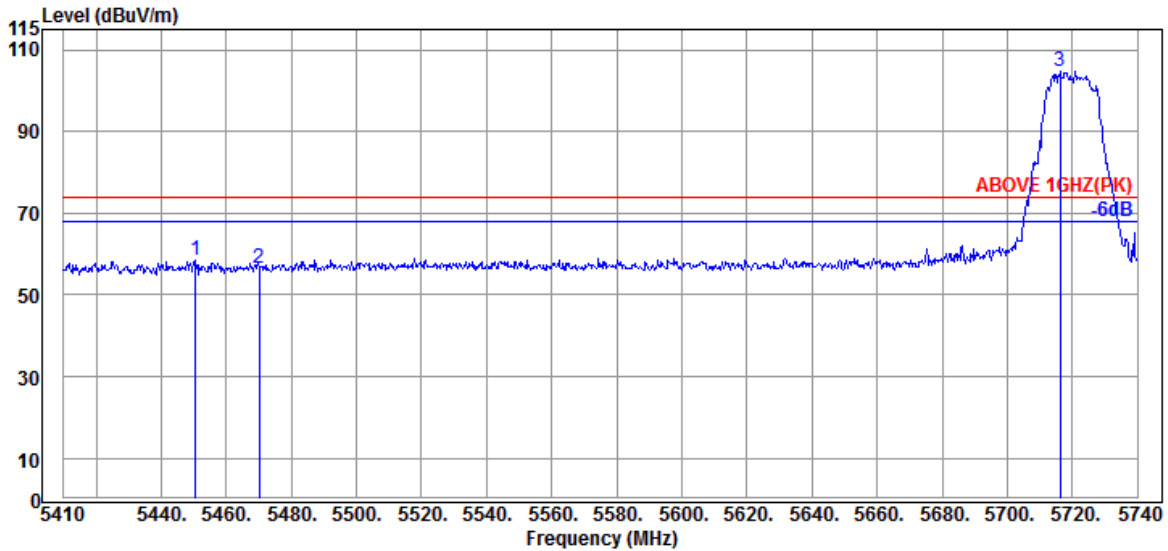

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.20	9.05	39.26	54.67	58.66	74.00	15.34	Peak
5470.060	34.17	9.06	39.26	52.46	56.43	74.00	17.57	Peak
@ 5716.240	33.90	9.19	39.30	100.83	104.62	---	---	Peak

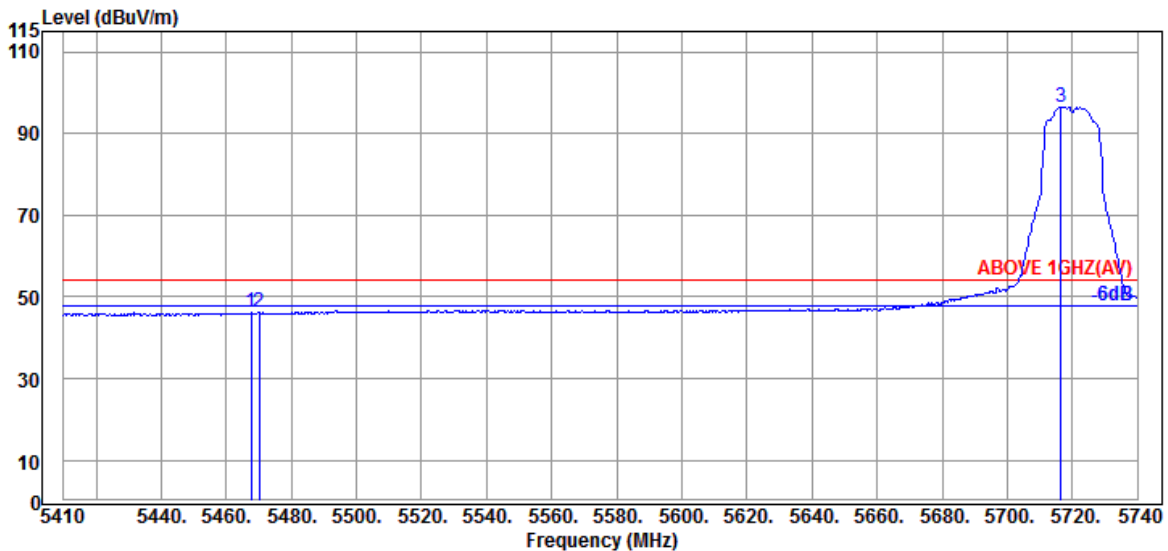


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.17	9.06	39.26	42.19	46.16	54.00	7.84	Average
5470.060	34.17	9.06	39.26	42.12	46.09	54.00	7.91	Average
@ 5716.570	33.90	9.19	39.30	92.78	96.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

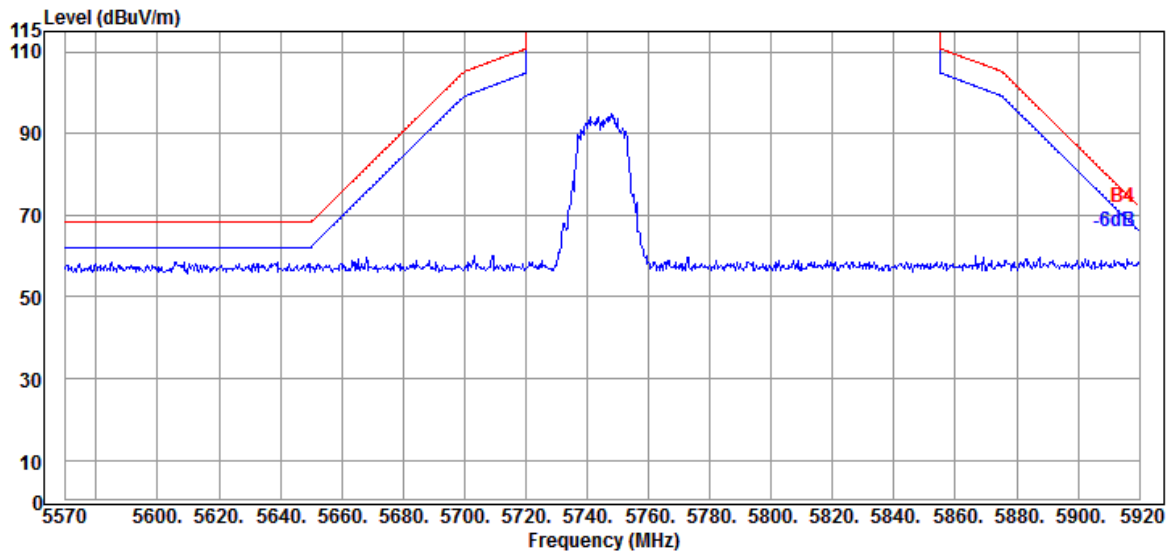


Antenna at Vertical Polarization

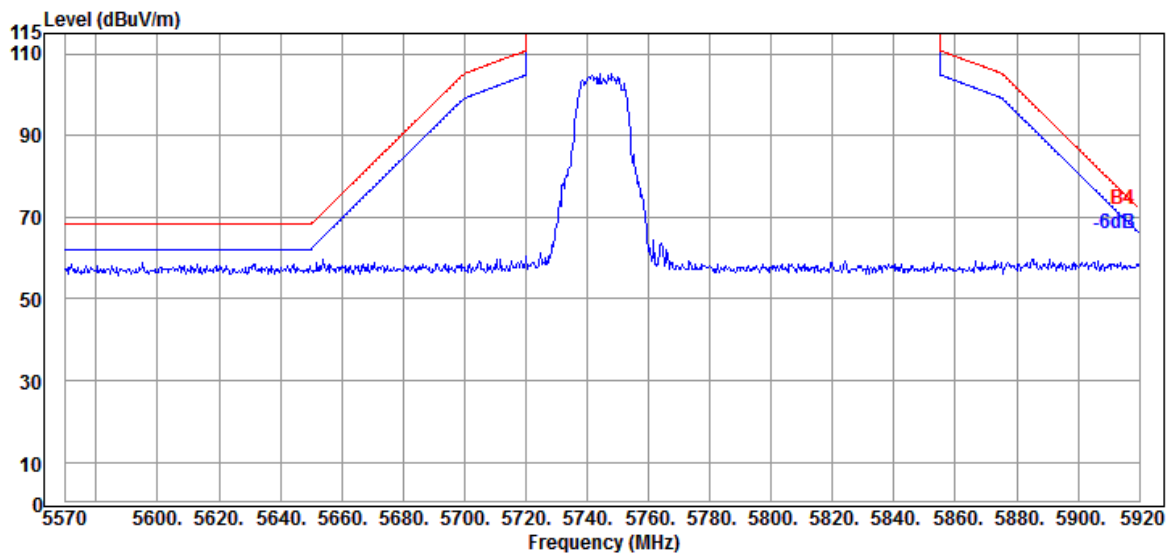


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

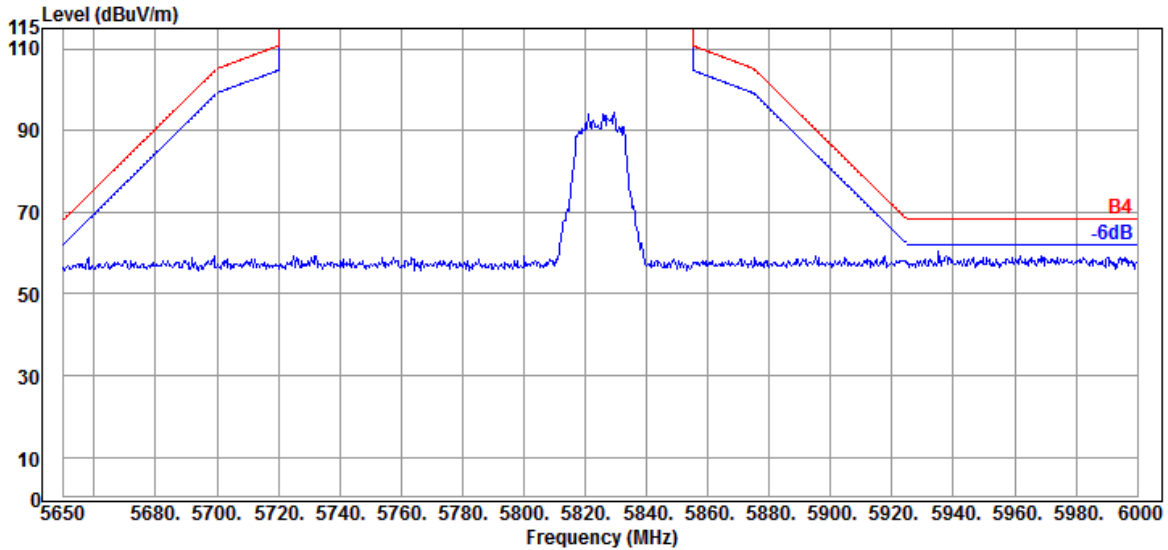

Antenna at Vertical Polarization

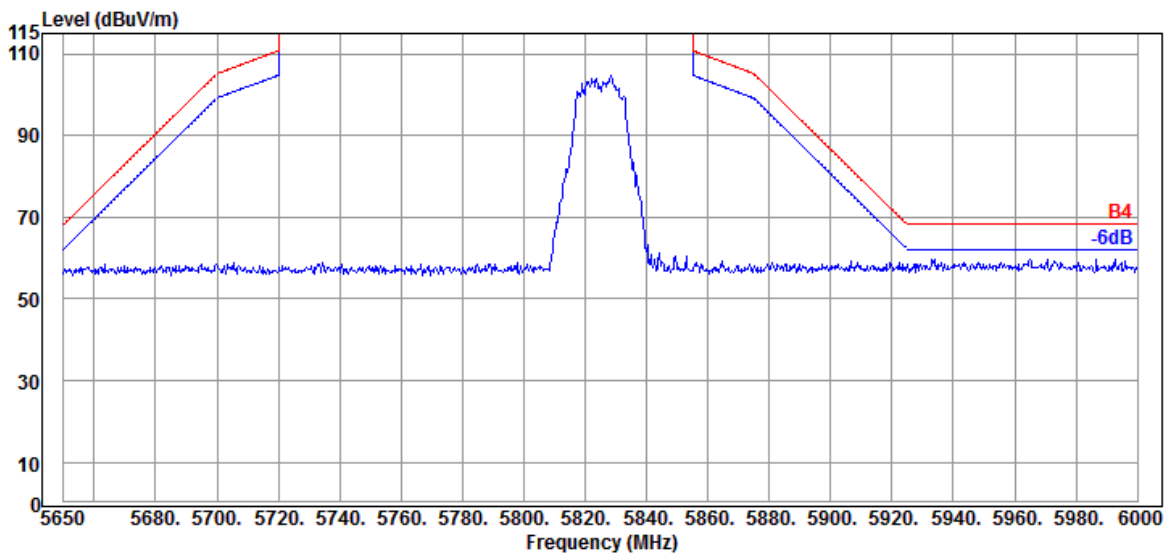


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

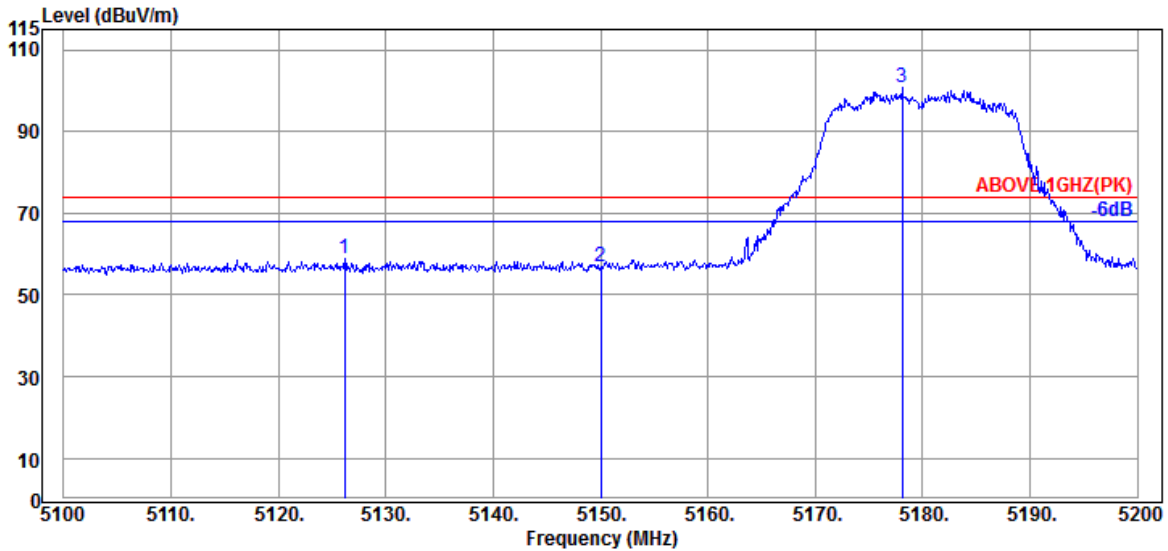

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.000	34.07	8.89	39.29	57.05	60.72	74.00	13.28	Peak
5150.000	34.20	8.92	39.29	54.56	58.39	74.00	15.61	Peak
@ 5181.400	34.33	8.95	39.28	102.07	106.07	---	---	Peak

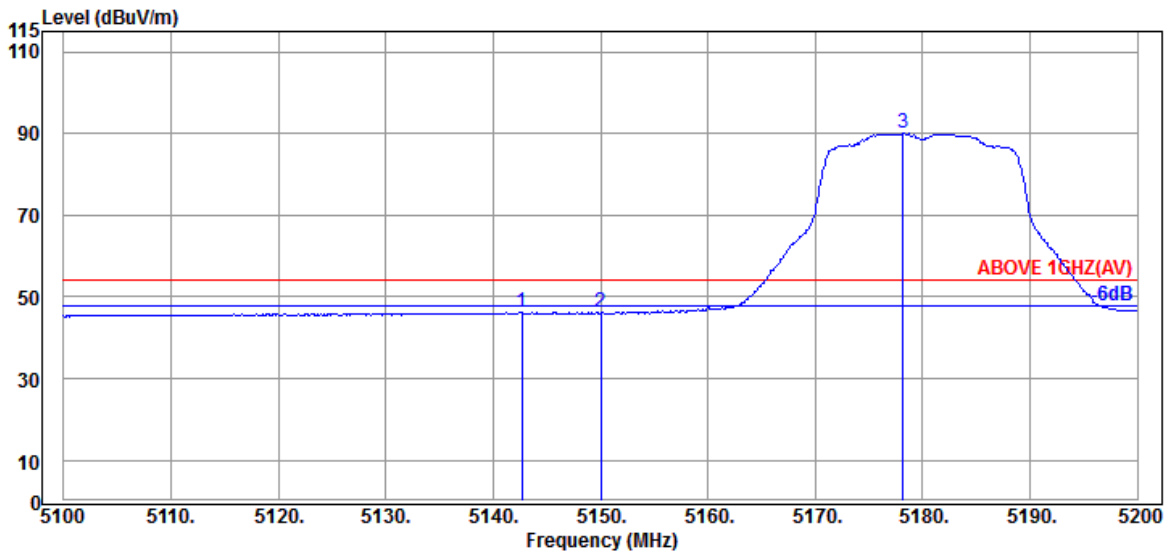


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.70	8.88	39.29	42.87	46.16	54.00	7.84	Average
5150.000	33.70	8.88	39.29	42.77	46.06	54.00	7.94	Average
@ 5178.200	33.83	8.90	39.28	86.51	89.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

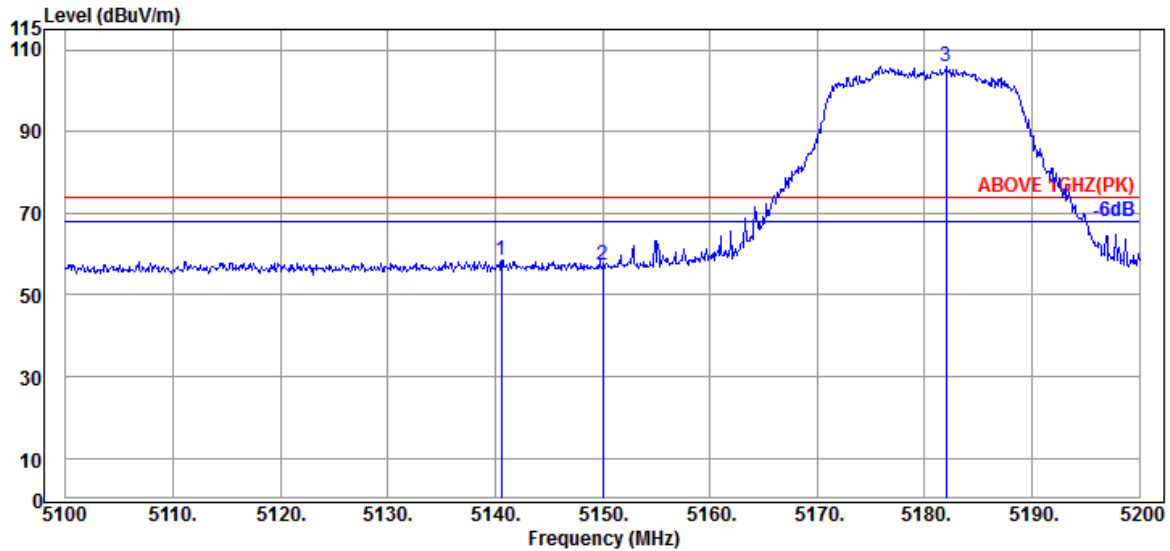

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.600	33.70	8.88	39.29	55.12	58.41	74.00	15.59	Peak
5150.000	33.70	8.88	39.29	54.01	57.30	74.00	16.70	Peak
@ 5182.000	33.83	8.90	39.28	102.55	106.00	---	---	Peak

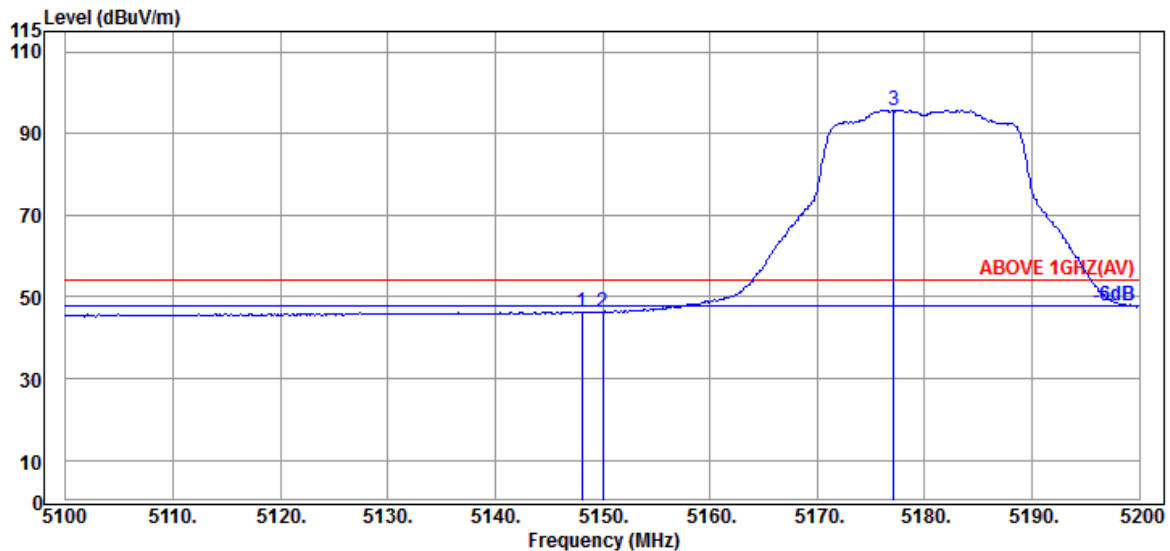


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.88	39.29	43.11	46.40	54.00	7.60	Average
5150.000	33.70	8.88	39.29	43.01	46.30	54.00	7.70	Average
@ 5177.100	33.83	8.90	39.28	92.28	95.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

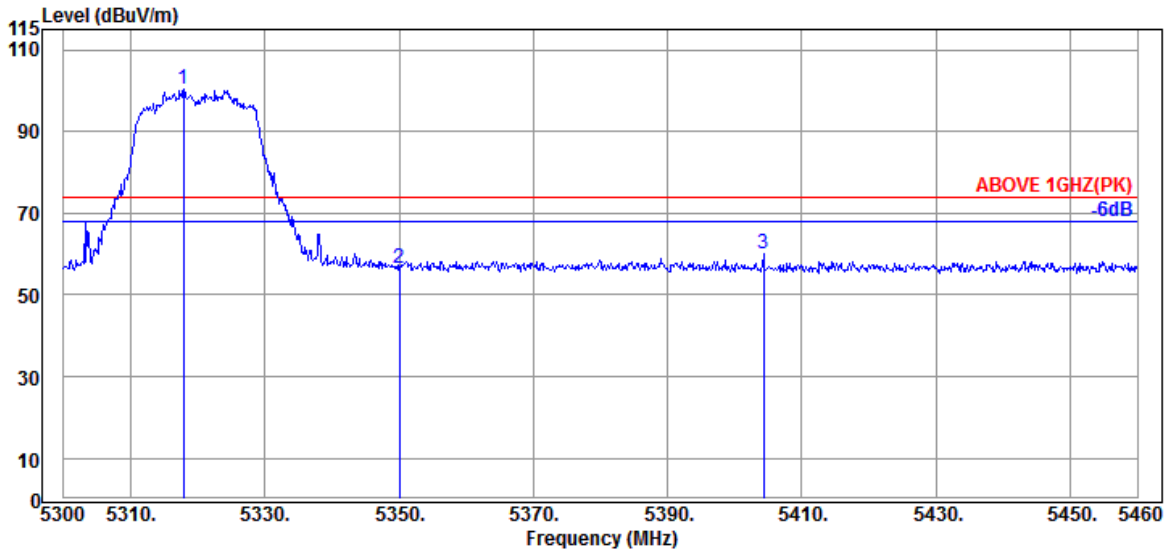

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	33.93	8.98	39.27	96.59	100.23	---	---	Peak
5350.080	34.00	8.99	39.27	52.74	56.46	74.00	17.54	Peak
5404.320	34.20	9.03	39.27	56.24	60.20	74.00	13.80	Peak

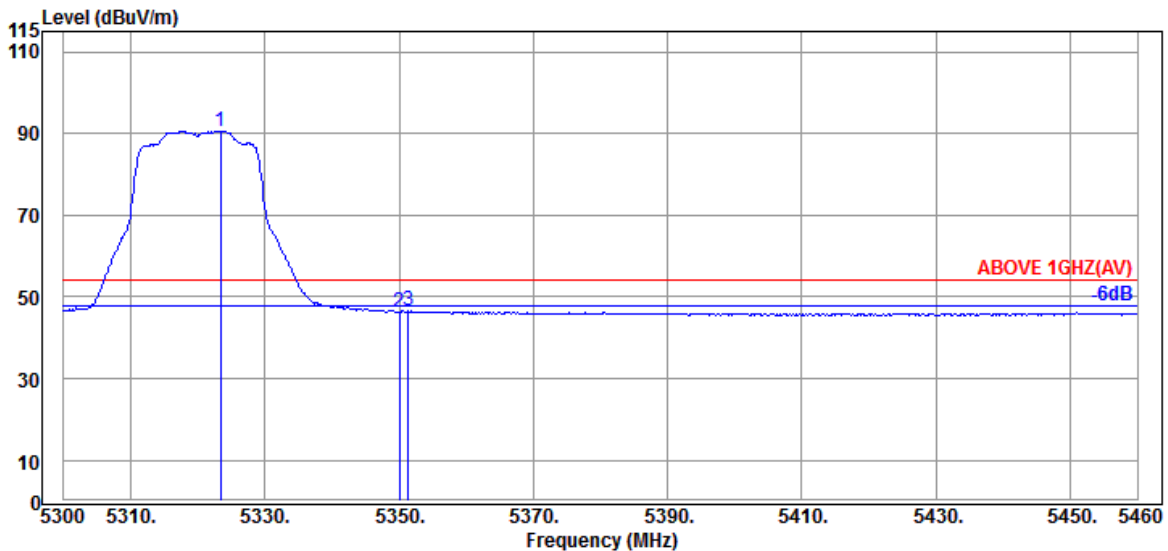


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	33.97	8.99	39.27	86.96	90.65	---	---	Average
5350.080	34.00	8.99	39.27	42.54	46.26	54.00	7.74	Average
5351.360	34.00	8.99	39.27	43.02	46.74	54.00	7.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

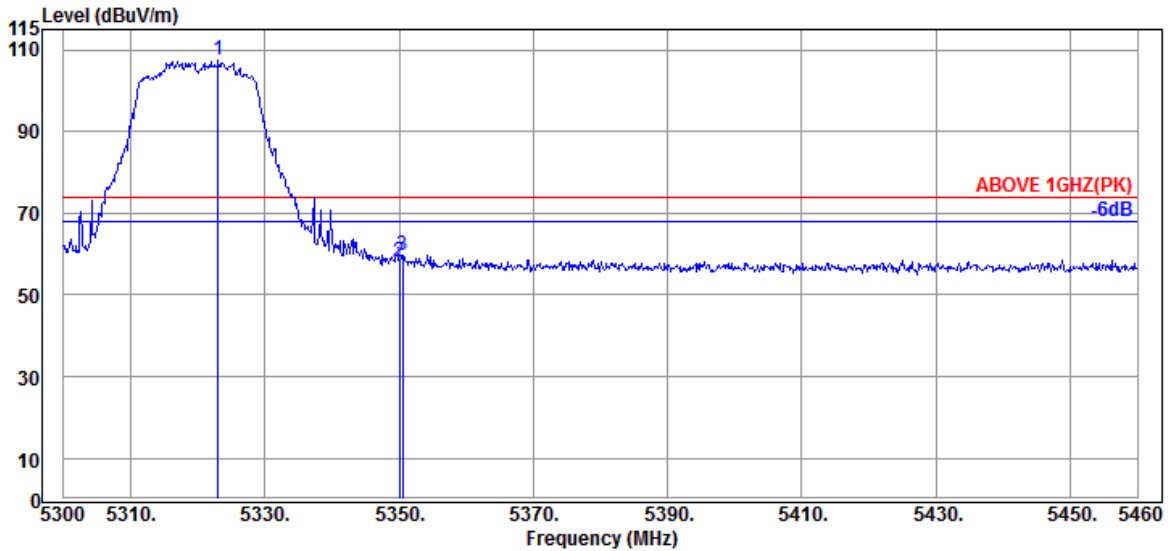

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	33.93	8.98	39.27	103.67	107.31	---	---	Peak
5350.080	34.00	8.99	39.27	54.53	58.25	74.00	15.75	Peak
5350.560	34.00	8.99	39.27	56.11	59.83	74.00	14.17	Peak

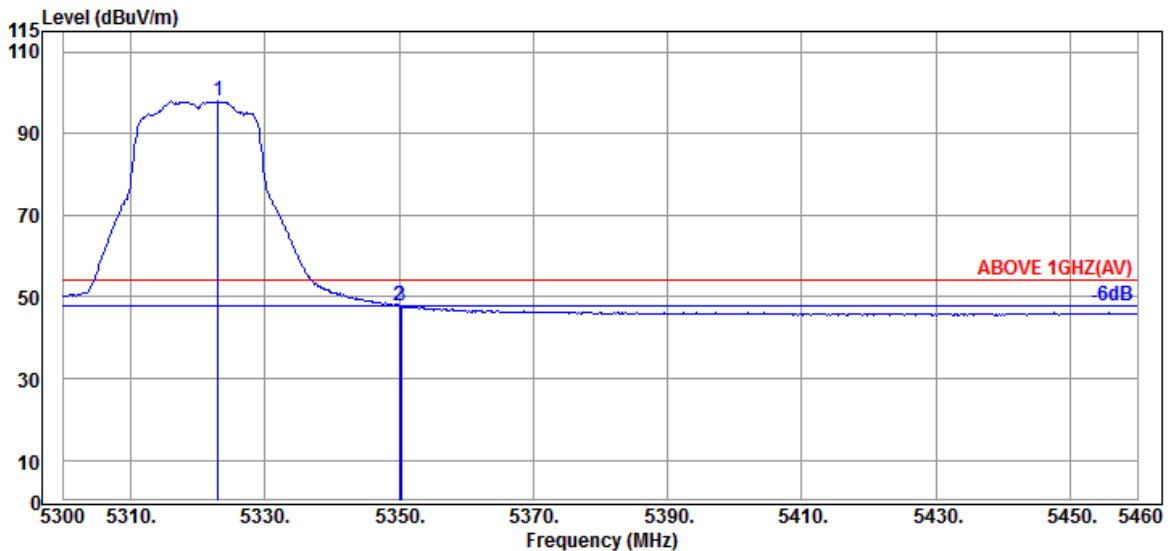


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	33.93	8.98	39.27	94.24	97.88	---	---	Average
5350.080	34.00	8.99	39.27	44.22	47.94	54.00	6.06	Average
5350.240	34.00	8.99	39.27	44.11	47.83	54.00	6.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

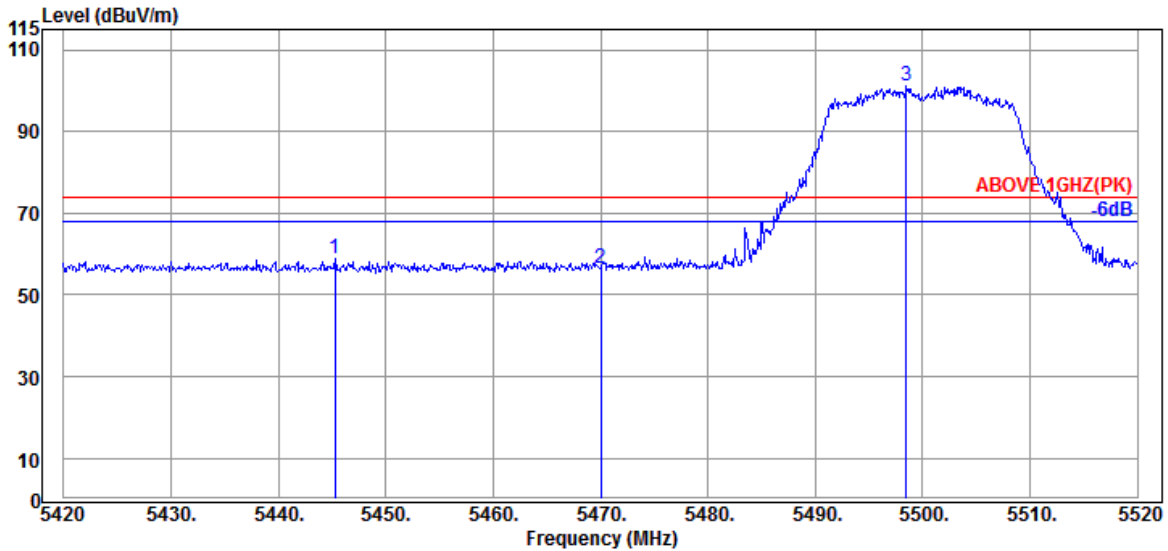

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.20	9.04	39.26	54.71	58.69	74.00	15.31	Peak
5470.000	34.17	9.06	39.26	52.57	56.54	74.00	17.46	Peak
@ 5498.500	34.10	9.08	39.26	97.20	101.12	---	---	Peak

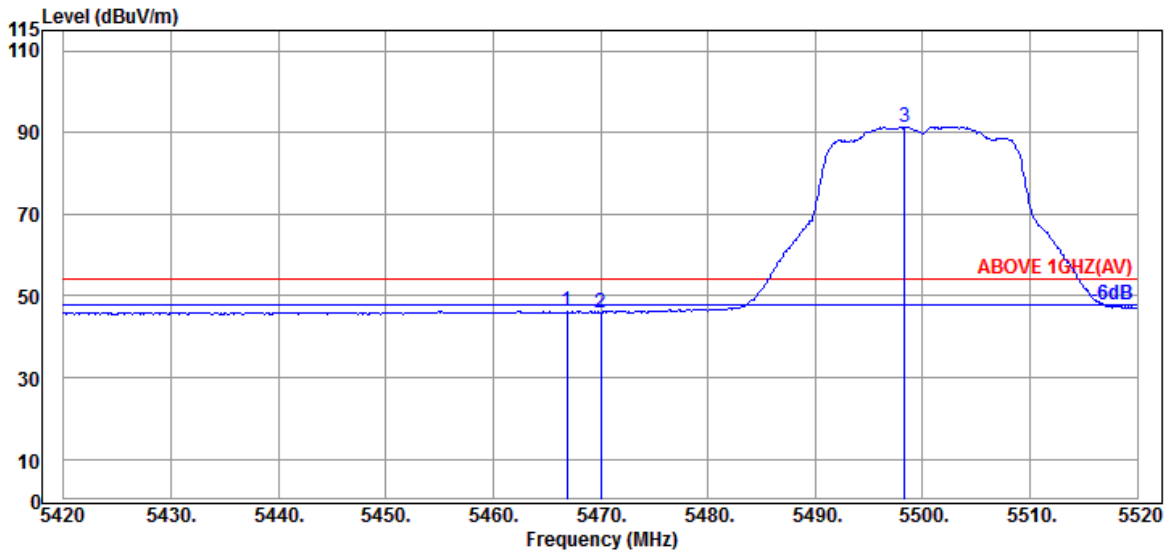


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	9.06	39.26	42.23	46.20	54.00	7.80	Average
5470.000	34.17	9.06	39.26	41.99	45.96	54.00	8.04	Average
@ 5498.300	34.10	9.08	39.26	87.49	91.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

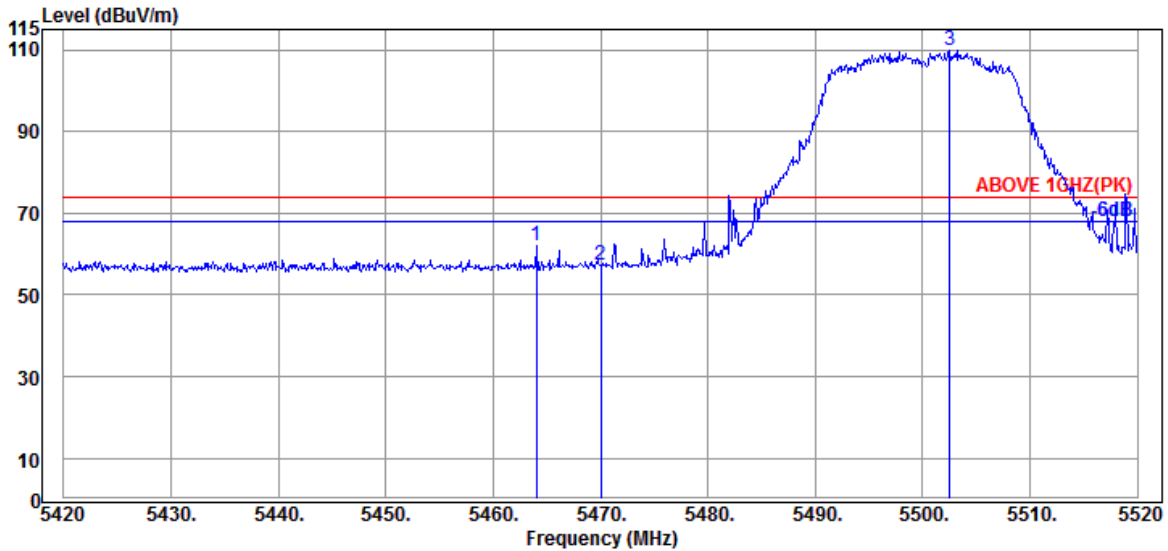

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.17	9.06	39.26	57.99	61.96	74.00	12.04	Peak
5470.000	34.17	9.06	39.26	53.27	57.24	74.00	16.76	Peak
@ 5502.500	34.10	9.08	39.26	106.01	109.93	---	---	Peak

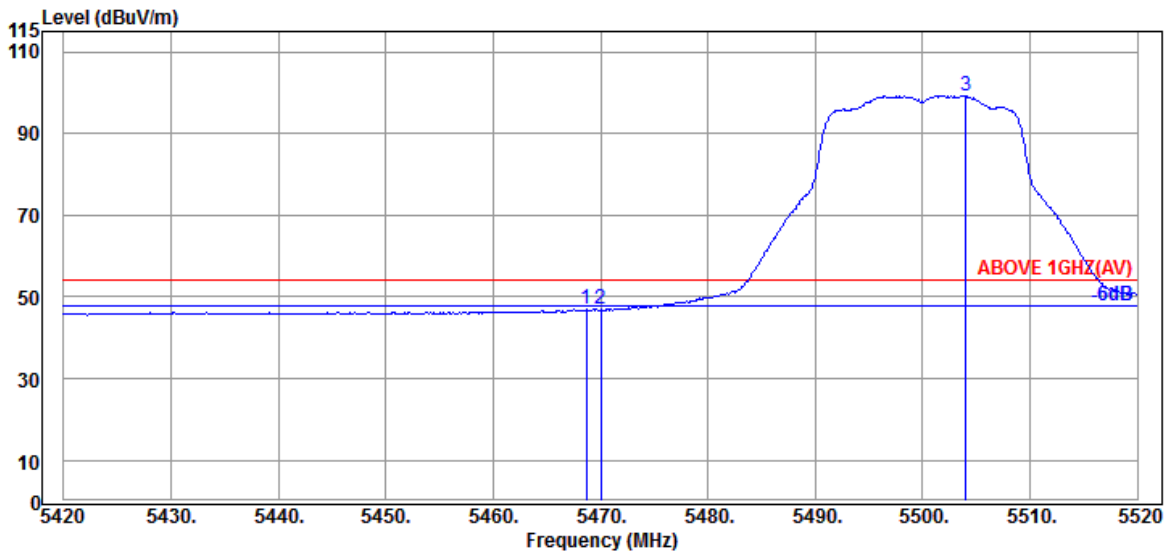


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.17	9.06	39.26	42.88	46.85	54.00	7.15	Average
5470.000	34.17	9.06	39.26	42.92	46.89	54.00	7.11	Average
@ 5504.000	34.10	9.08	39.26	95.41	99.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

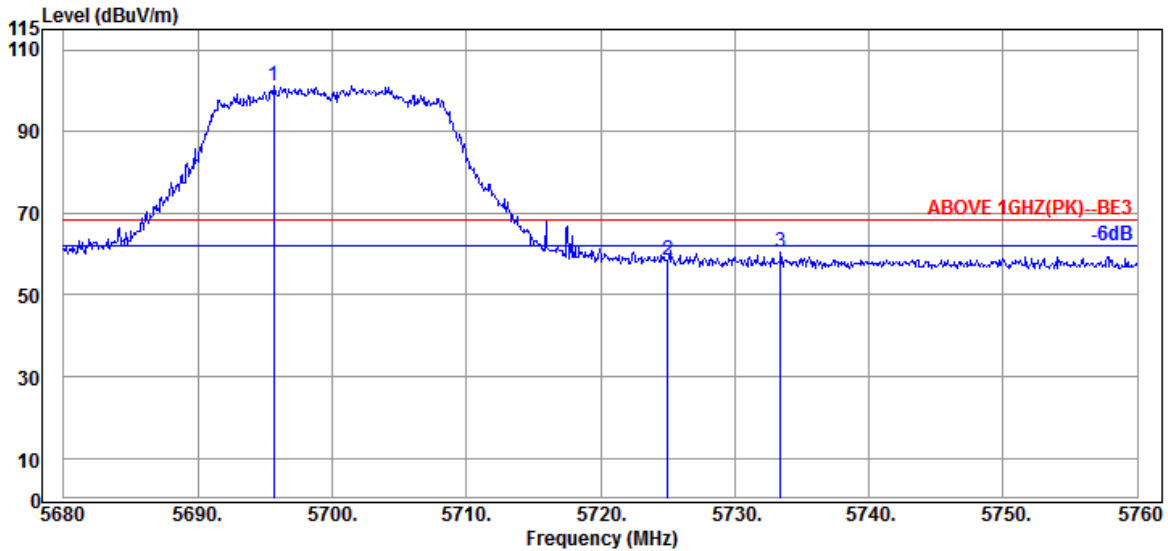

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.680	33.90	9.18	39.30	97.53	101.31	---	---	Peak
5725.040	33.90	9.20	39.30	54.56	58.36	68.20	9.84	Peak
5733.440	33.90	9.20	39.31	56.73	60.52	68.20	7.68	Peak

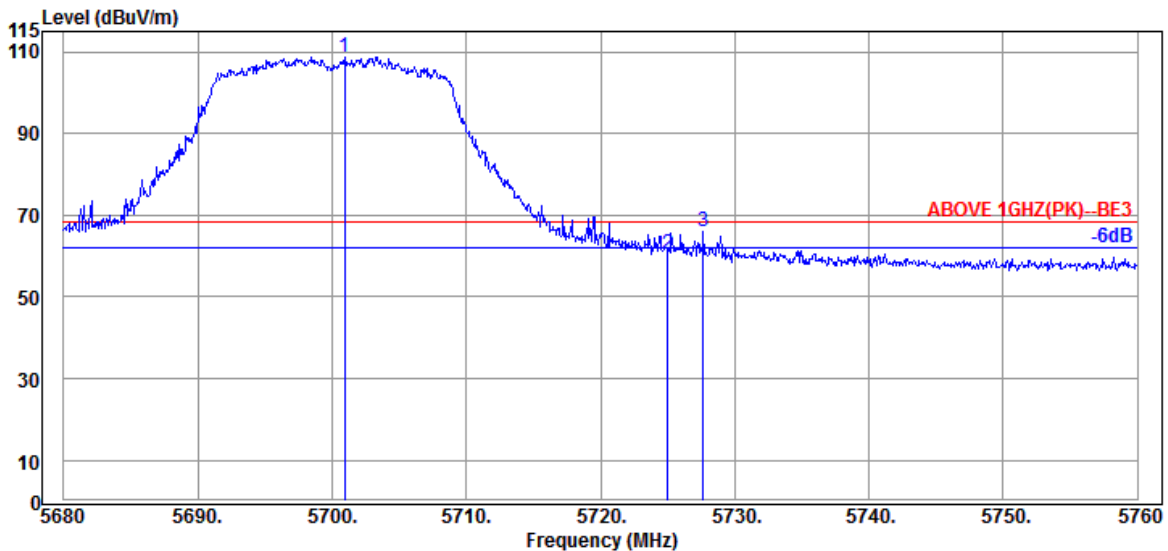


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	33.90	9.18	39.30	105.05	108.83	---	---	Peak
5725.040	33.90	9.20	39.30	56.75	60.55	68.20	7.65	Peak
5727.680	33.90	9.20	39.31	62.06	65.85	68.20	2.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

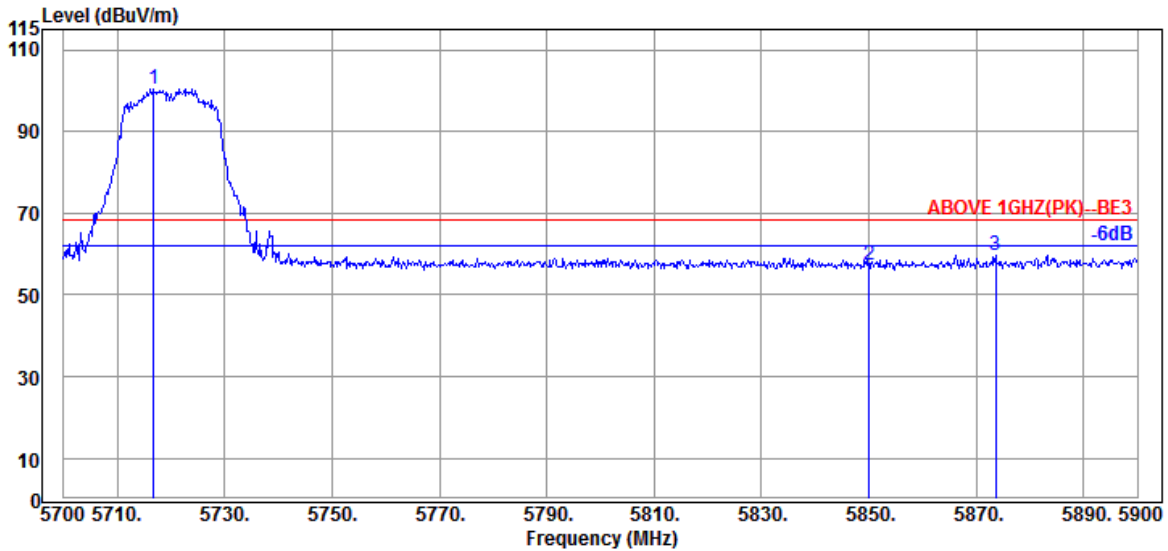

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.800	33.90	9.19	39.30	96.75	100.54	---	---	Peak
5850.000	34.00	9.25	39.33	53.27	57.19	68.20	11.01	Peak
5873.600	34.07	9.27	39.33	55.57	59.58	68.20	8.62	Peak

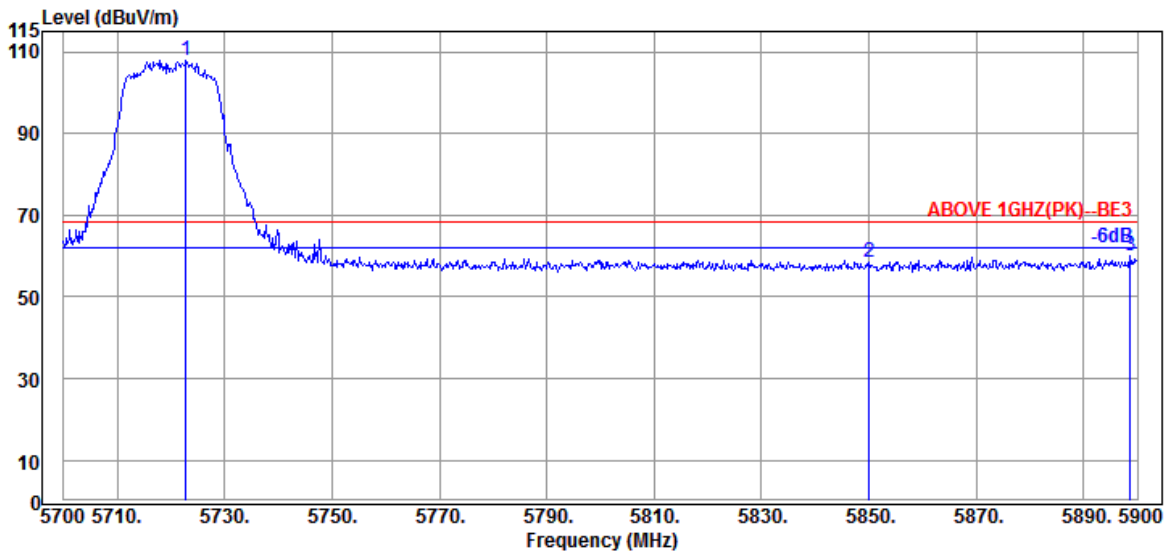


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.90	9.20	39.30	104.05	107.85	---	---	Peak
5850.000	34.00	9.25	39.33	54.39	58.31	68.20	9.89	Peak
5898.600	34.10	9.28	39.34	55.91	59.95	68.20	8.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

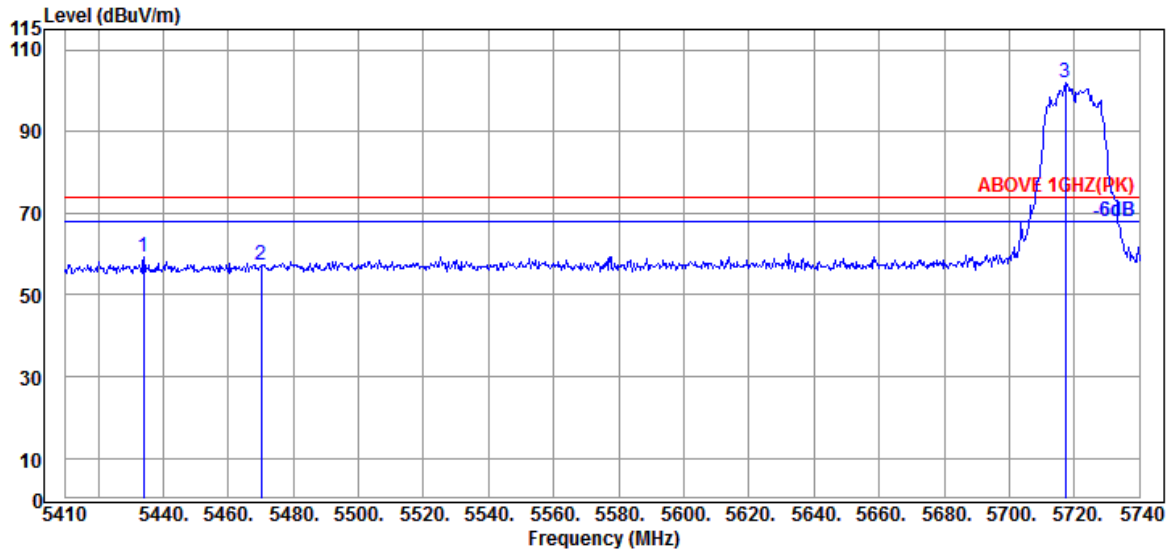

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.090	34.20	9.04	39.26	55.27	59.25	74.00	14.75	Peak
5470.060	34.17	9.06	39.26	53.34	57.31	74.00	16.69	Peak
@ 5717.230	33.90	9.19	39.30	98.11	101.90	---	---	Peak

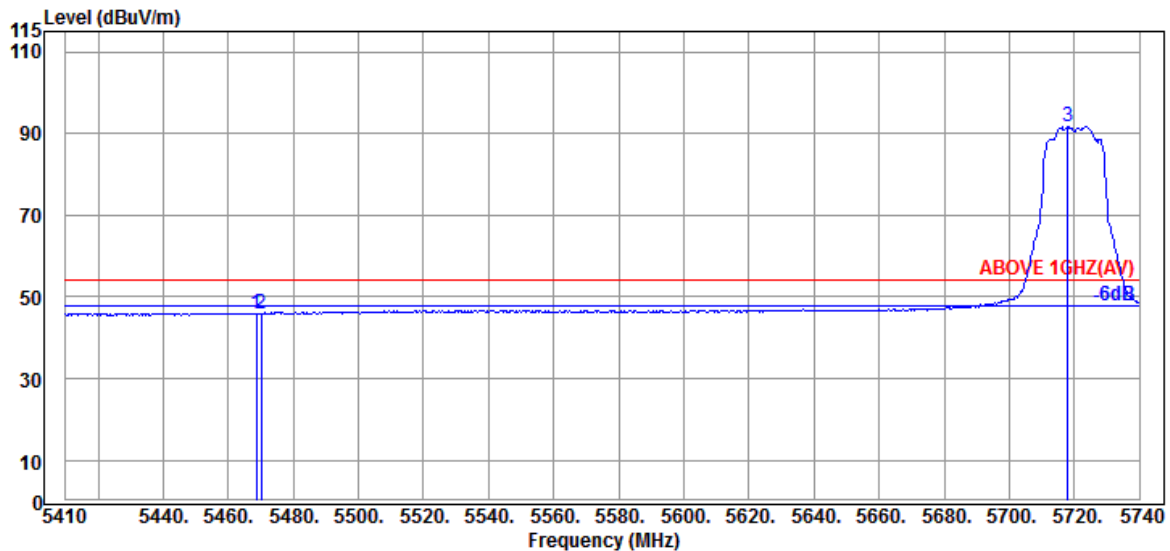


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.17	9.06	39.26	42.05	46.02	54.00	7.98	Average
5470.060	34.17	9.06	39.26	41.94	45.91	54.00	8.09	Average
@ 5717.890	33.90	9.19	39.30	87.91	91.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

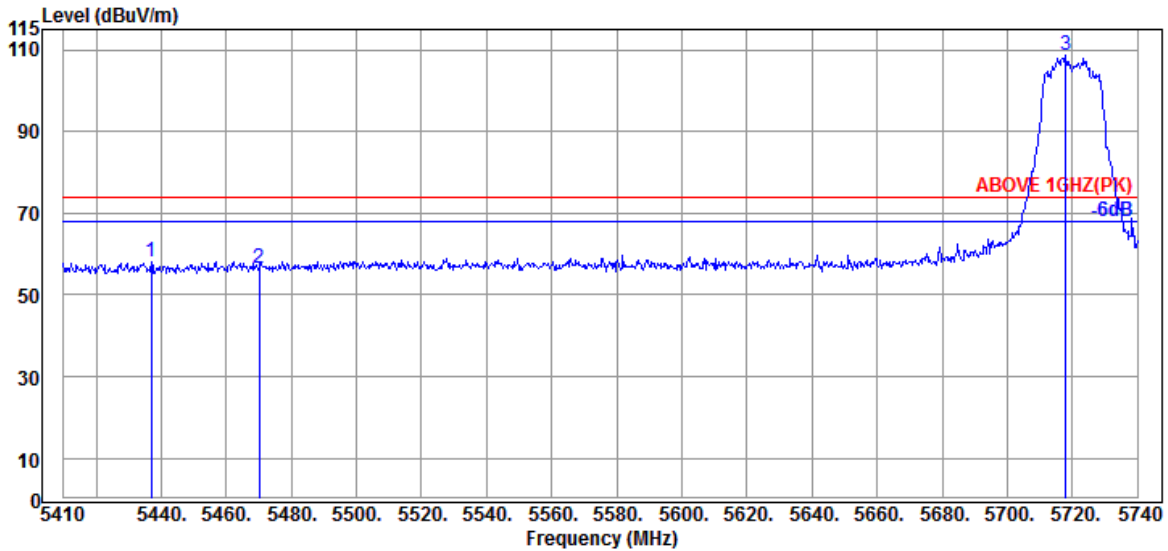

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.060	34.20	9.04	39.26	54.31	58.29	74.00	15.71	Peak
5470.060	34.17	9.06	39.26	52.53	56.50	74.00	17.50	Peak
@ 5717.890	33.90	9.19	39.30	105.03	108.82	---	---	Peak

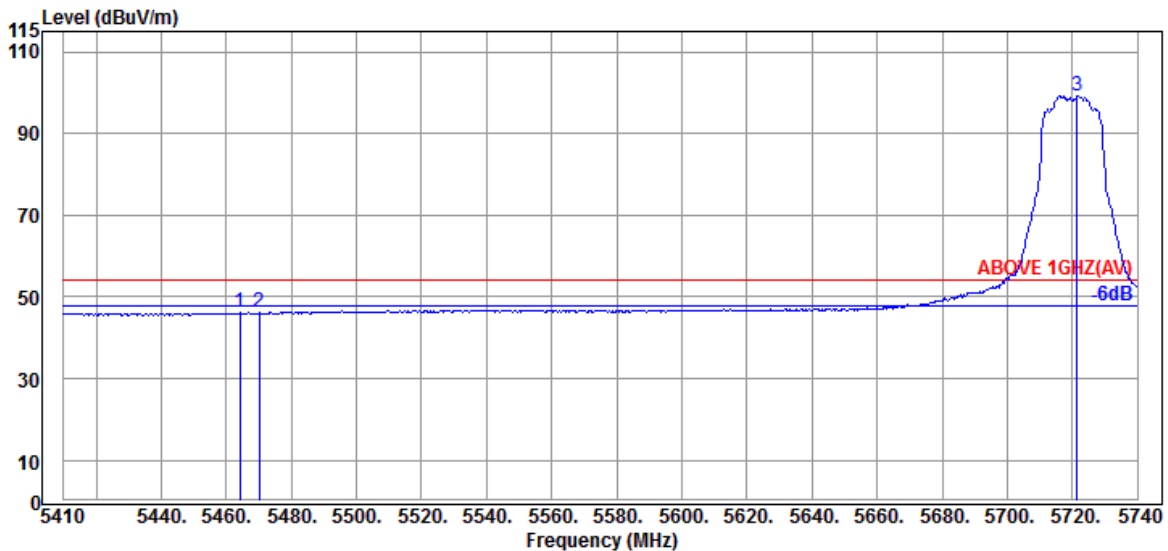


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
5470.060	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
@ 5721.520	33.90	9.19	39.30	95.34	99.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

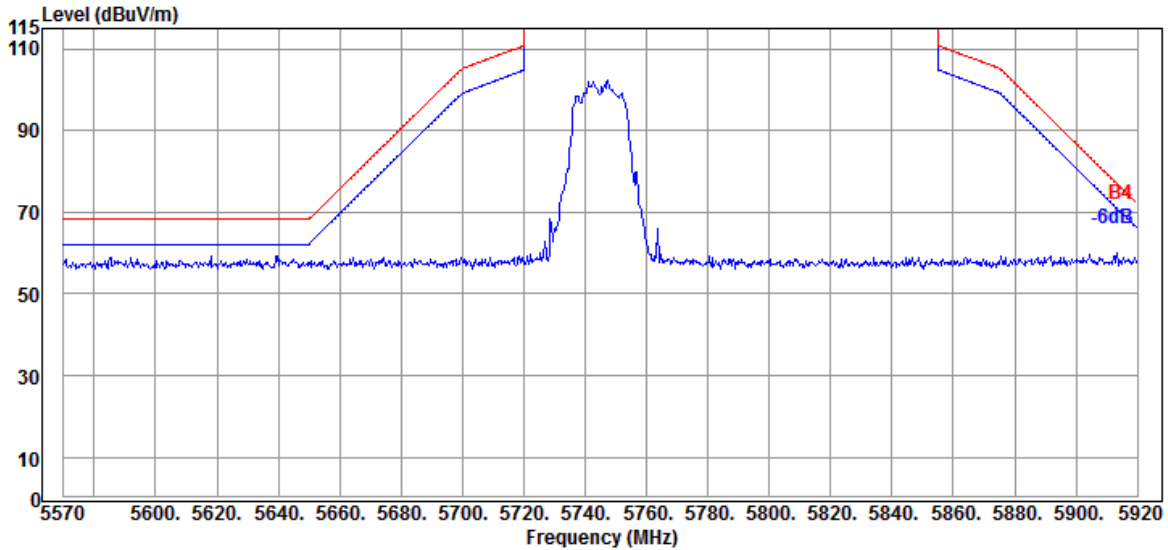


Antenna at Vertical Polarization

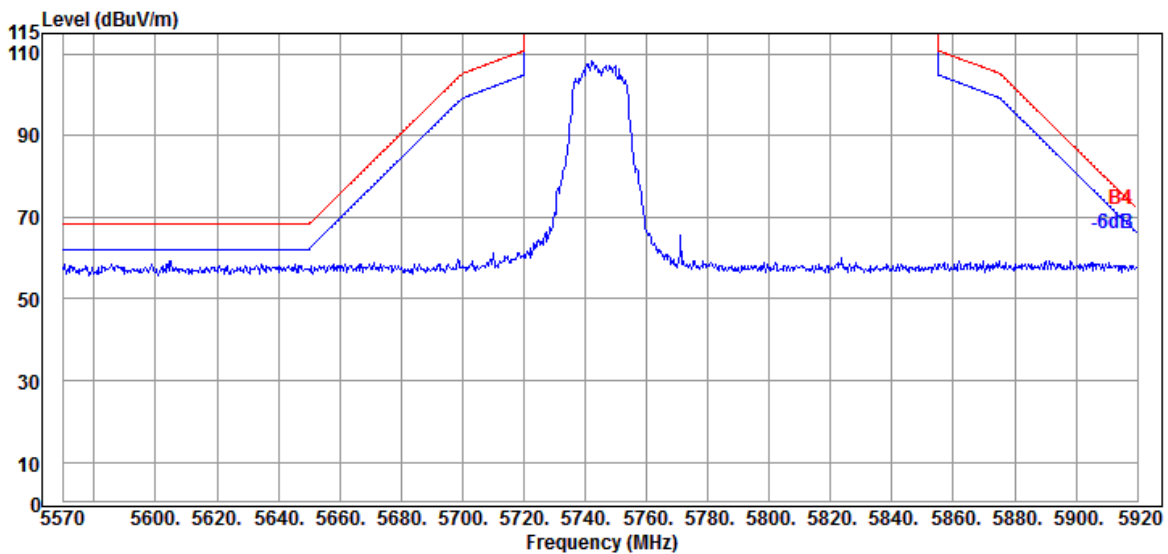


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

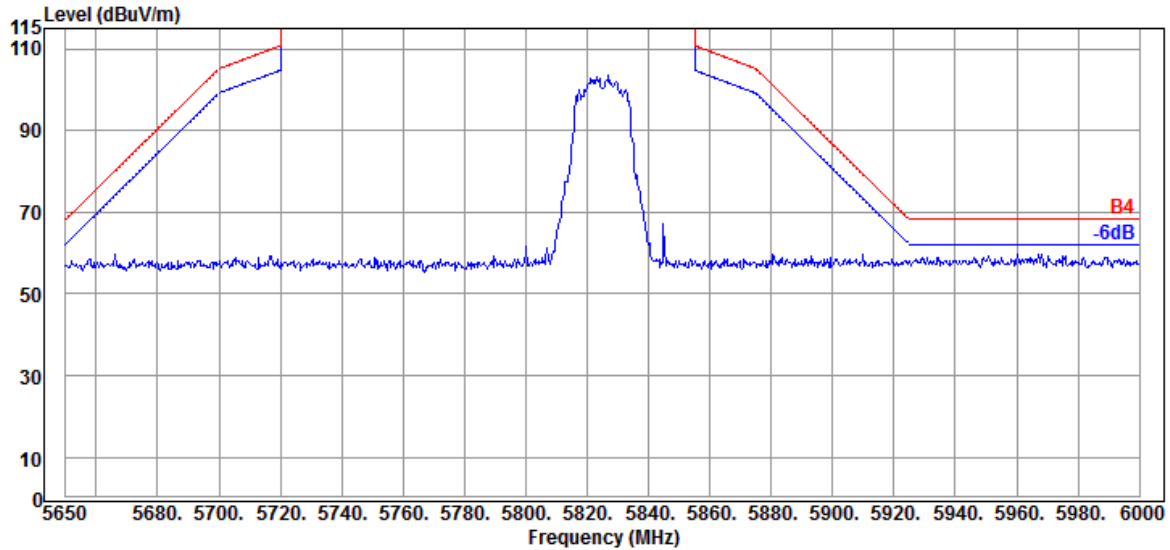

Antenna at Vertical Polarization

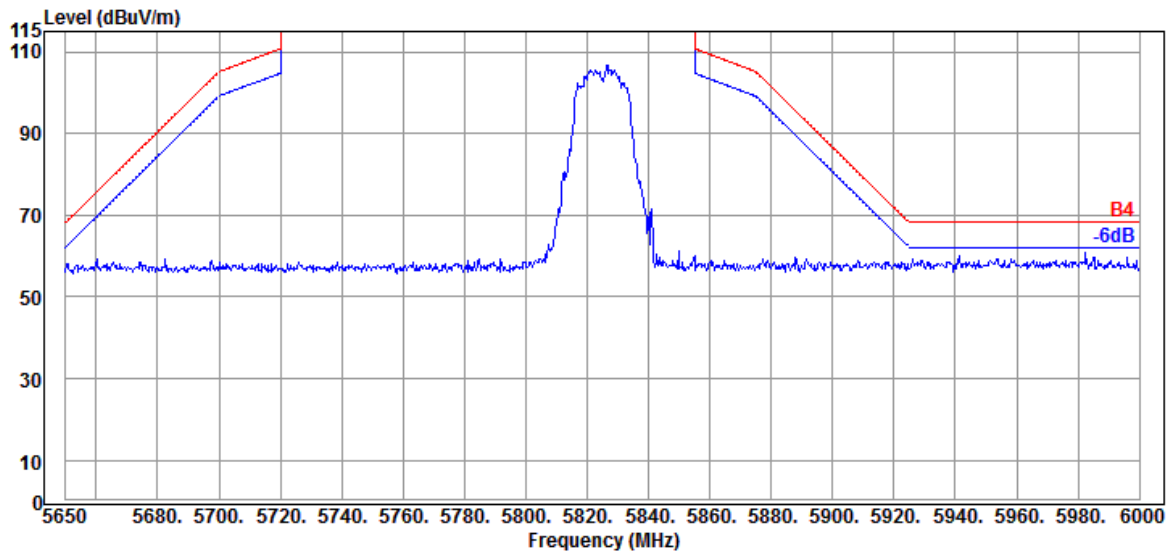


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

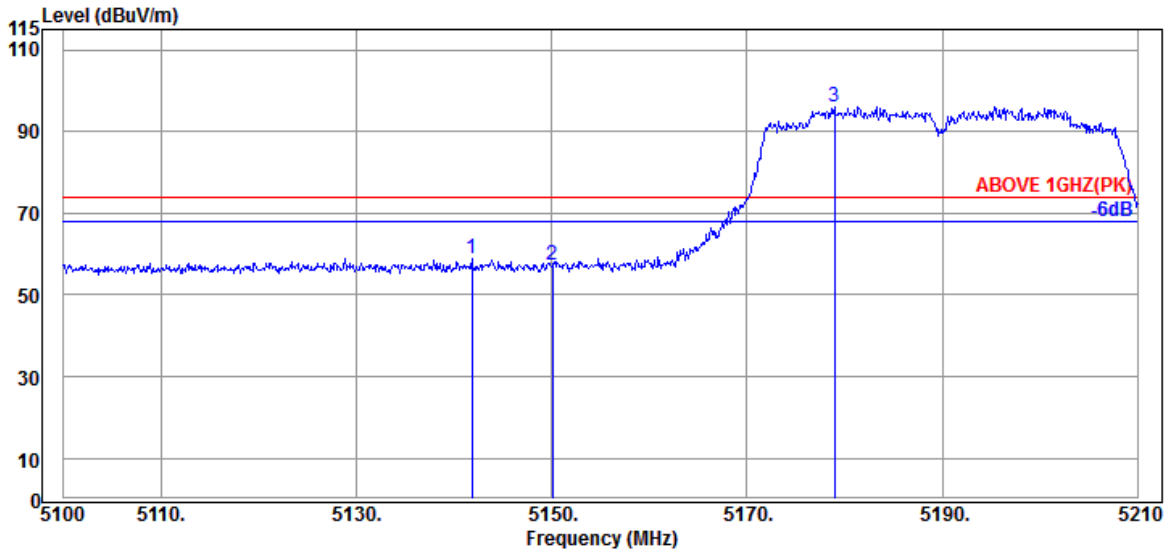

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.800	33.70	8.88	39.29	55.57	58.86	74.00	15.14	Peak
5150.050	33.70	8.88	39.29	53.91	57.20	74.00	16.80	Peak
@ 5178.980	33.83	8.90	39.28	92.74	96.19	---	---	Peak

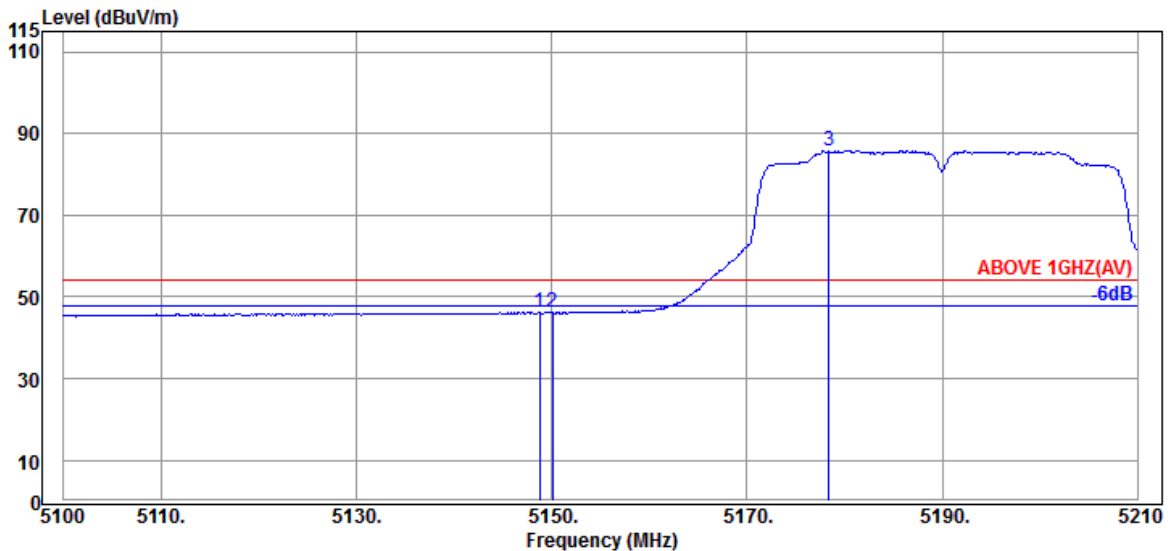


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	33.70	8.88	39.29	42.99	46.28	54.00	7.72	Average
5150.050	33.70	8.88	39.29	42.79	46.08	54.00	7.92	Average
@ 5178.430	33.83	8.90	39.28	82.45	85.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

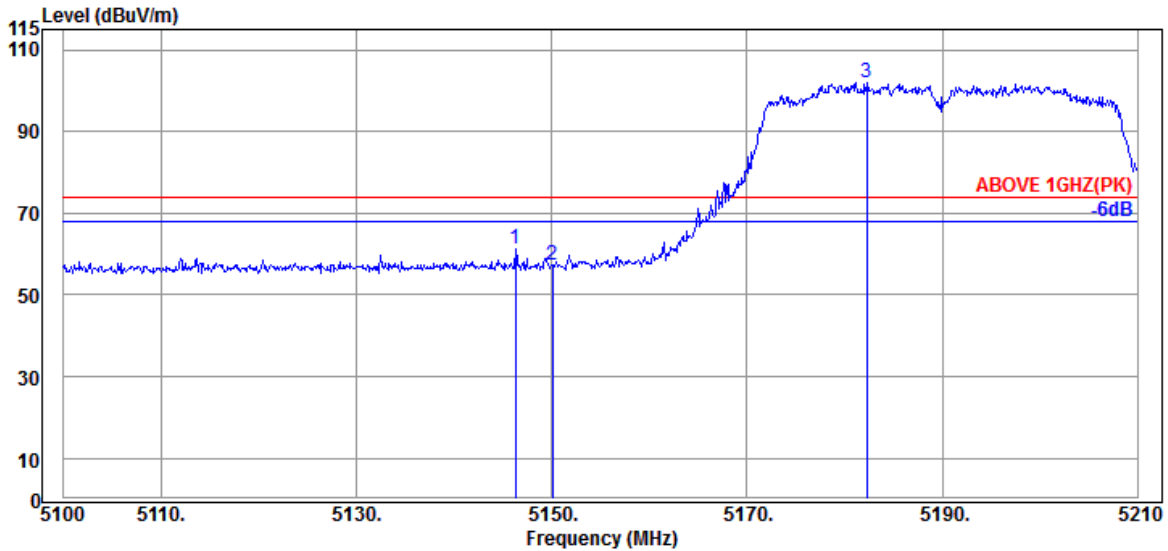

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.310	33.70	8.88	39.29	57.93	61.22	74.00	12.78	Peak
5150.050	33.70	8.88	39.29	53.86	57.15	74.00	16.85	Peak
@ 5182.280	33.83	8.90	39.28	98.70	102.15	---	---	Peak

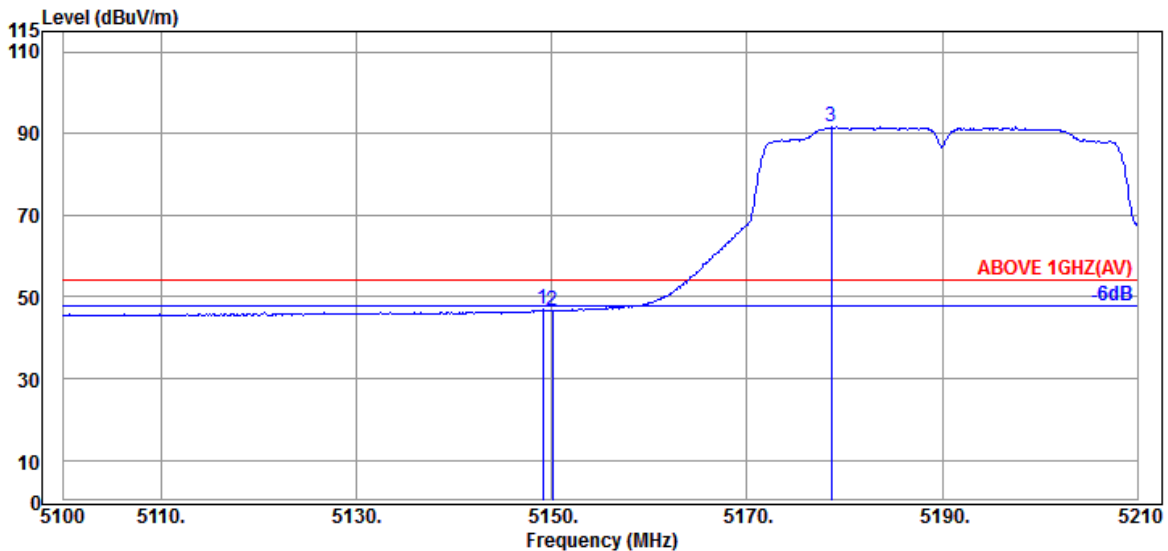


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	33.70	8.88	39.29	43.60	46.89	54.00	7.11	Average
5150.050	33.70	8.88	39.29	43.40	46.69	54.00	7.31	Average
@ 5178.650	33.83	8.90	39.28	88.08	91.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

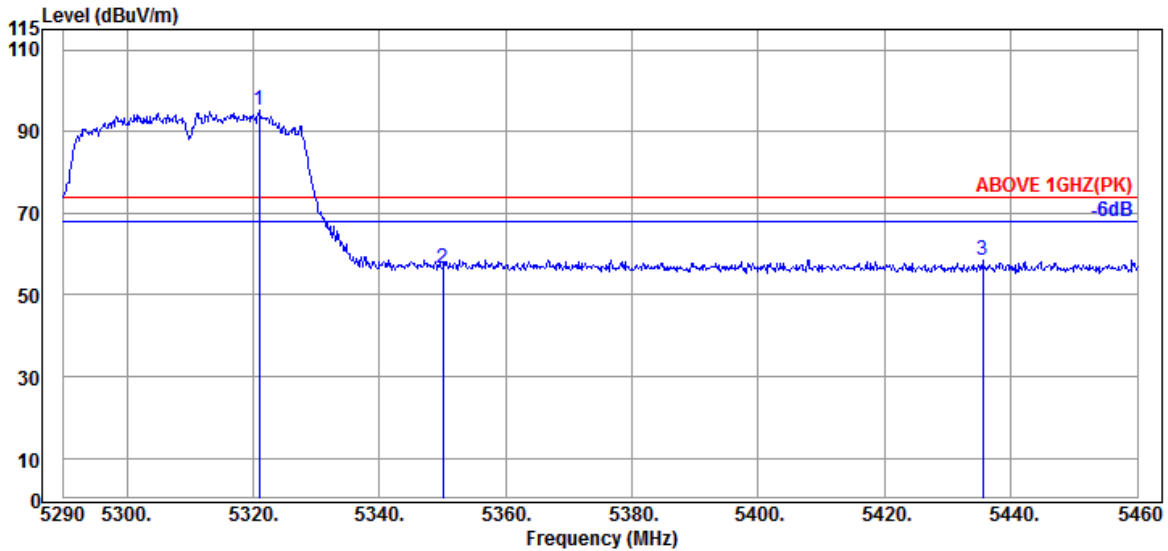

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.940	33.93	8.98	39.27	91.47	95.11	---	---	Peak
5350.010	34.00	8.99	39.27	52.64	56.36	74.00	17.64	Peak
5435.520	34.20	9.04	39.26	54.64	58.62	74.00	15.38	Peak

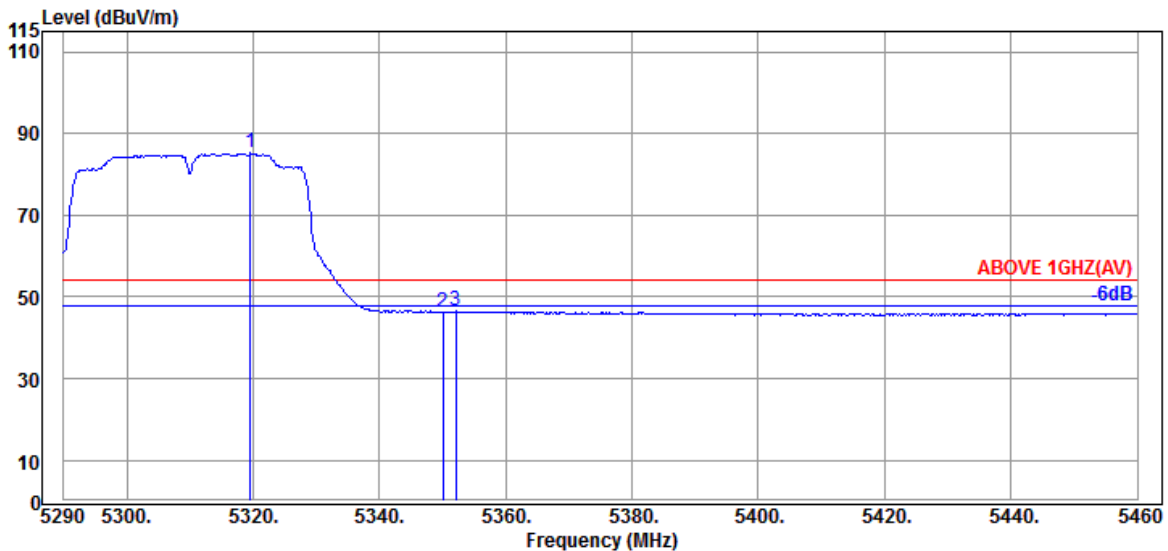


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.580	33.93	8.98	39.27	81.53	85.17	---	---	Average
5350.010	34.00	8.99	39.27	42.51	46.23	54.00	7.77	Average
5352.050	34.00	8.99	39.27	42.76	46.48	54.00	7.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

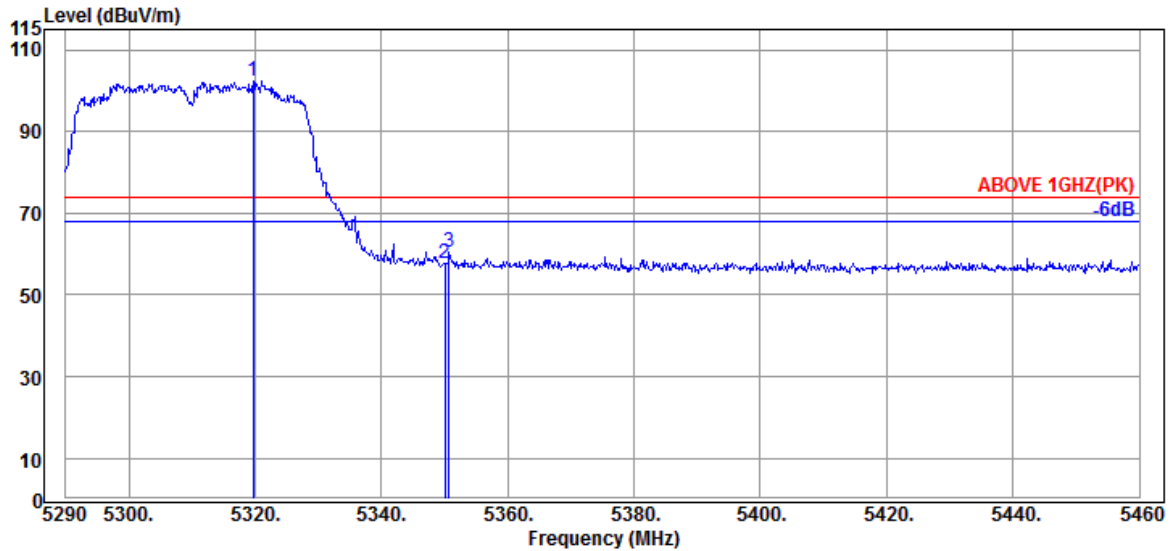

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.750	33.93	8.98	39.27	98.82	102.46	---	---	Peak
5350.010	34.00	8.99	39.27	53.96	57.68	74.00	16.32	Peak
5350.690	34.00	8.99	39.27	56.88	60.60	74.00	13.40	Peak

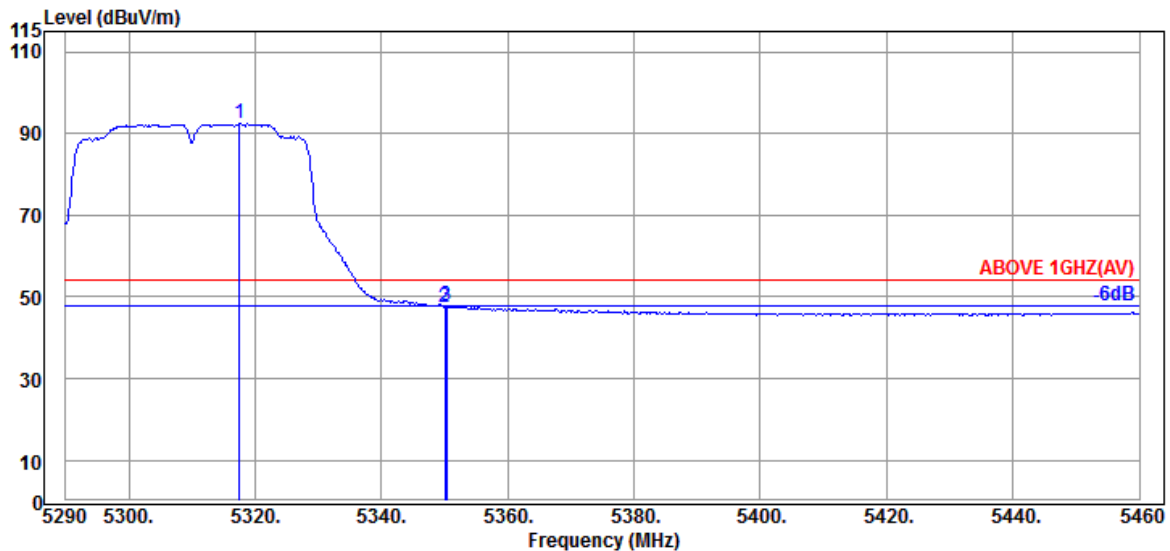


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.540	33.93	8.98	39.27	88.72	92.36	---	---	Average
5350.010	34.00	8.99	39.27	43.71	47.43	54.00	6.57	Average
5350.350	34.00	8.99	39.27	43.93	47.65	54.00	6.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

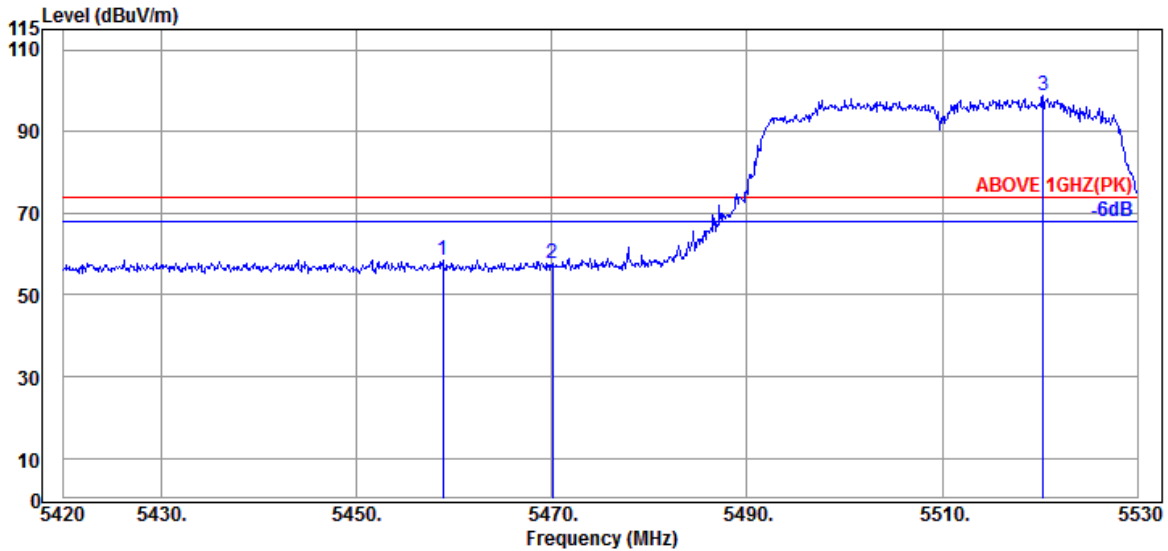

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.830	34.20	9.05	39.26	54.68	58.67	74.00	15.33	Peak
5470.050	34.17	9.06	39.26	53.86	57.83	74.00	16.17	Peak
@ 5520.320	34.07	9.09	39.26	94.85	98.75	---	---	Peak

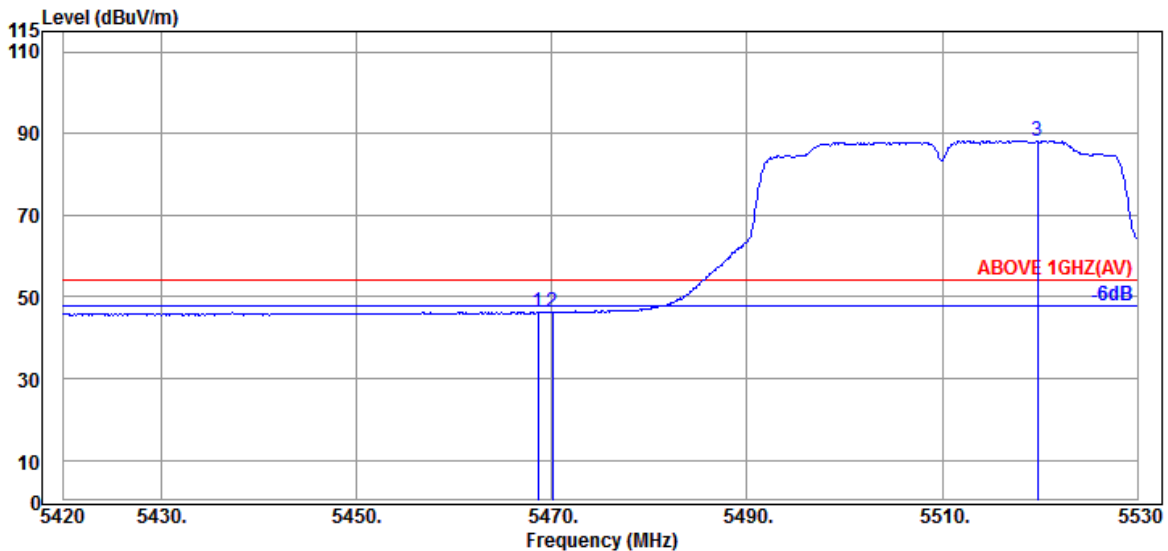


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.17	9.06	39.26	42.29	46.26	54.00	7.74	Average
5470.050	34.17	9.06	39.26	42.10	46.07	54.00	7.93	Average
@ 5519.770	34.07	9.09	39.26	84.36	88.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

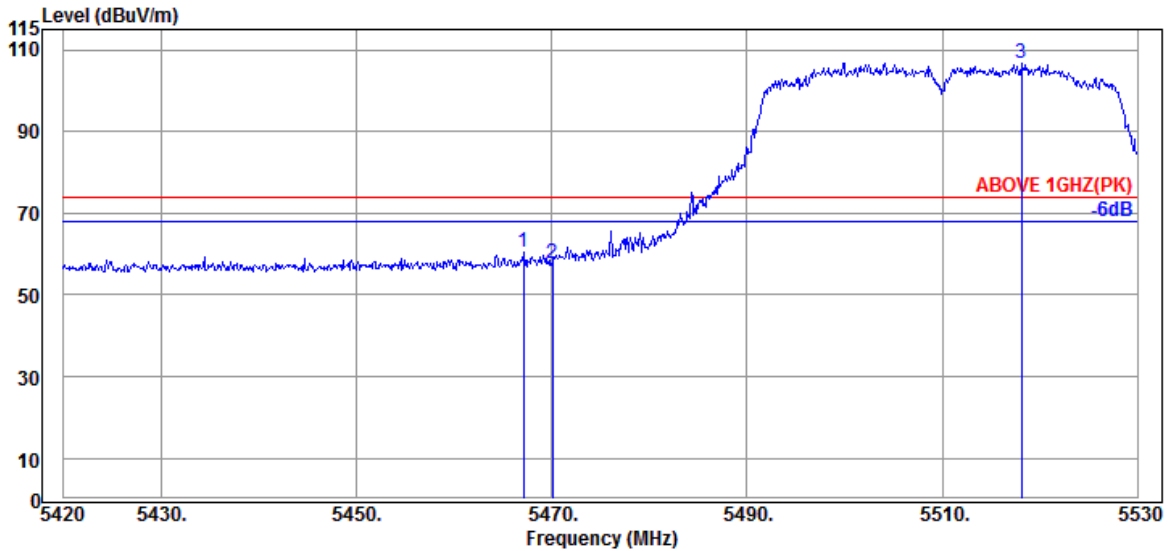

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.080	34.17	9.06	39.26	56.53	60.50	74.00	13.50	Peak
5470.050	34.17	9.06	39.26	53.92	57.89	74.00	16.11	Peak
@ 5518.120	34.07	9.09	39.26	102.86	106.76	---	---	Peak

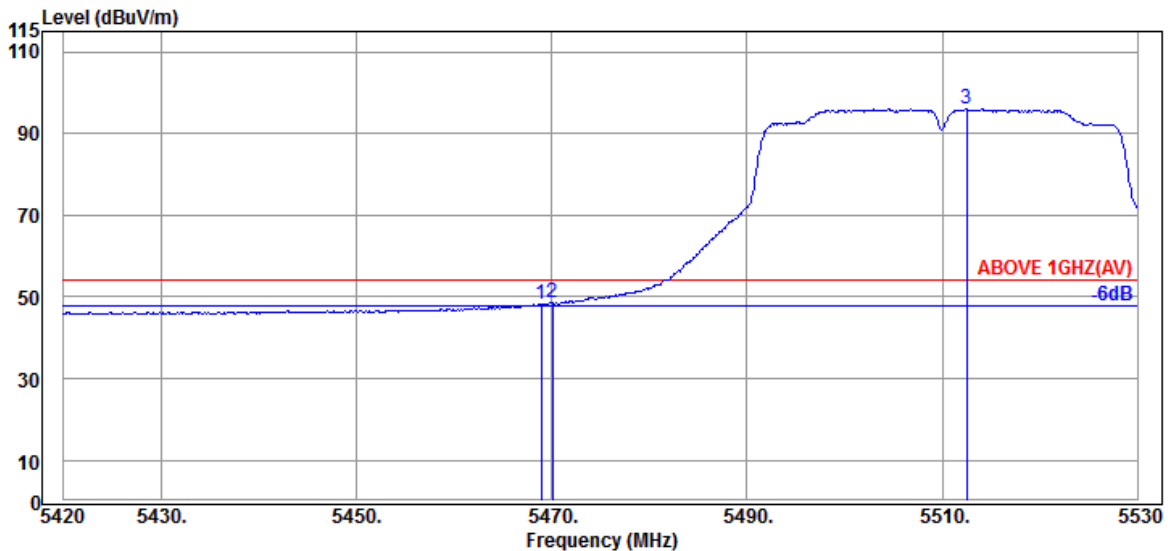


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	44.18	48.15	54.00	5.85	Average
5470.050	34.17	9.06	39.26	44.50	48.47	54.00	5.53	Average
@ 5512.510	34.07	9.09	39.26	92.09	95.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

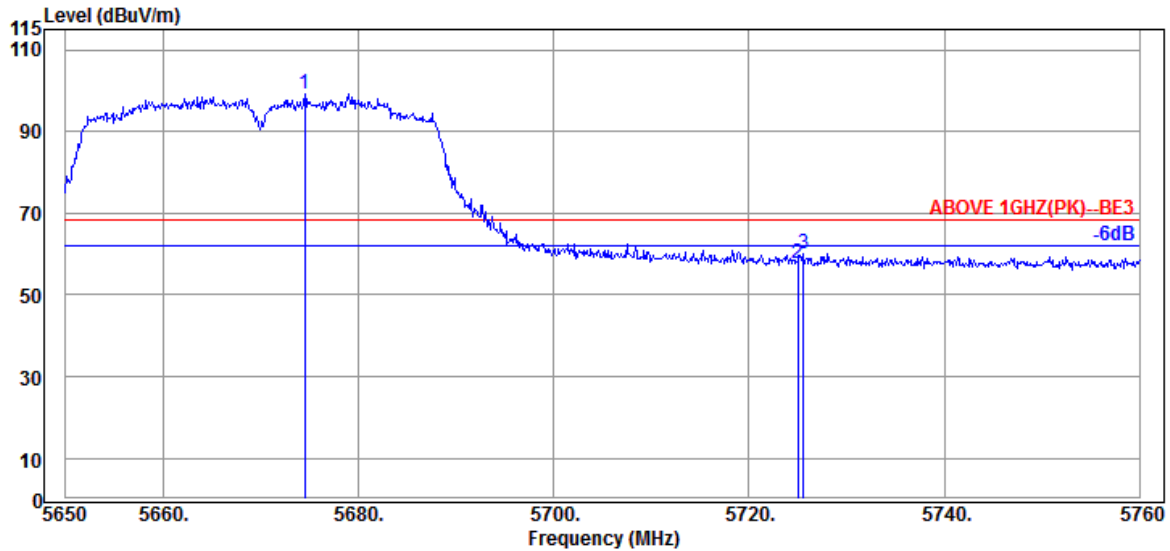

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.530	33.90	9.17	39.30	95.48	99.25	---	---	Peak
5725.020	33.90	9.20	39.30	54.01	57.81	68.20	10.39	Peak
5725.570	33.90	9.20	39.30	56.10	59.90	68.20	8.30	Peak

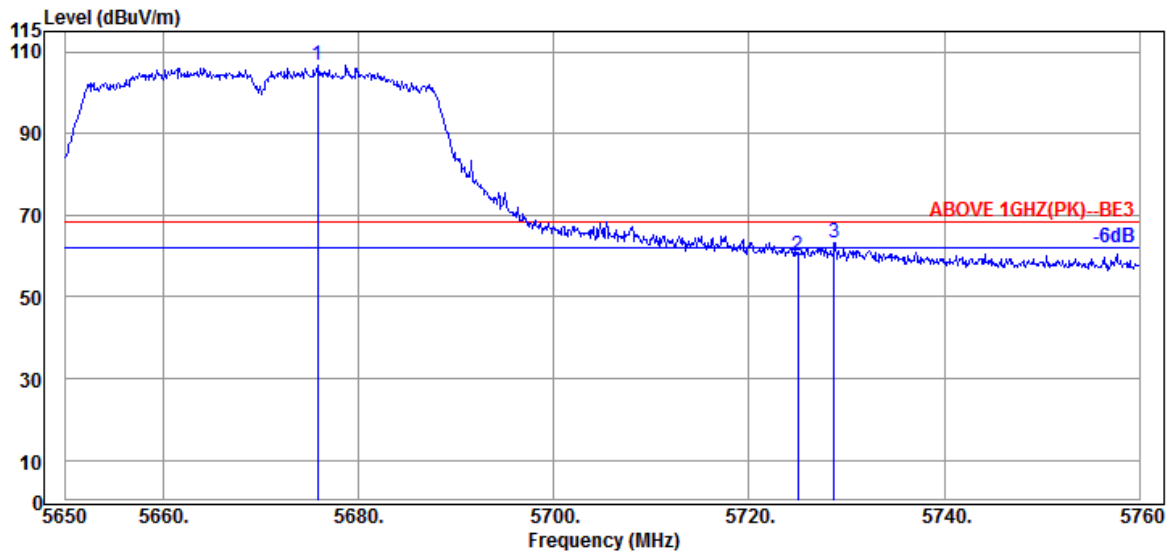


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.850	33.90	9.17	39.30	102.84	106.61	---	---	Peak
5725.020	33.90	9.20	39.30	56.33	60.13	68.20	8.07	Peak
5728.760	33.90	9.20	39.31	59.43	63.22	68.20	4.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

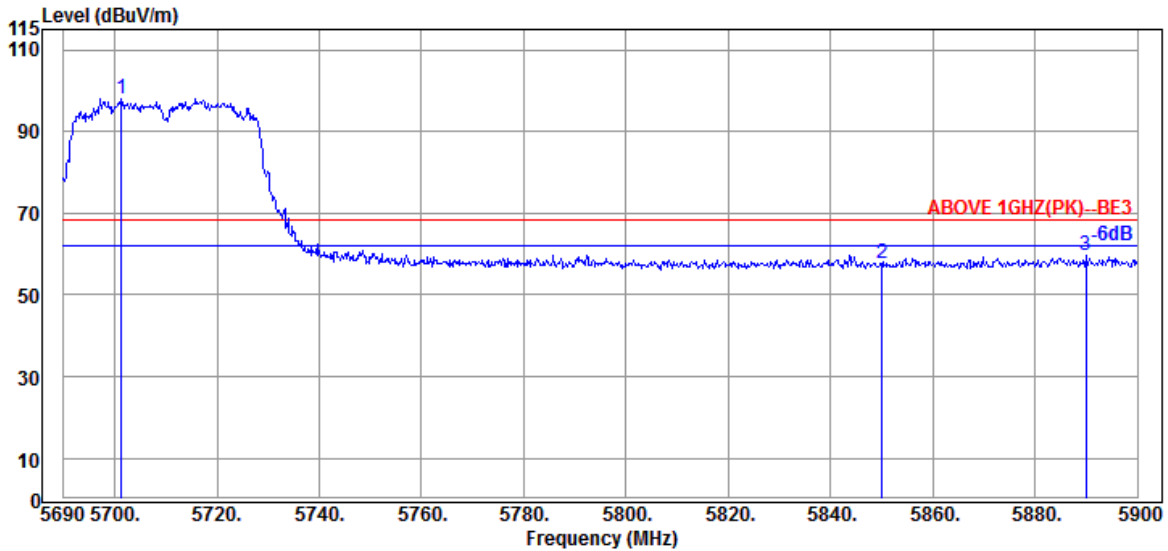

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.340	33.90	9.18	39.30	94.32	98.10	---	---	Peak
5850.020	34.00	9.25	39.33	53.59	57.51	68.20	10.69	Peak
5889.920	34.07	9.27	39.34	55.53	59.53	68.20	8.67	Peak

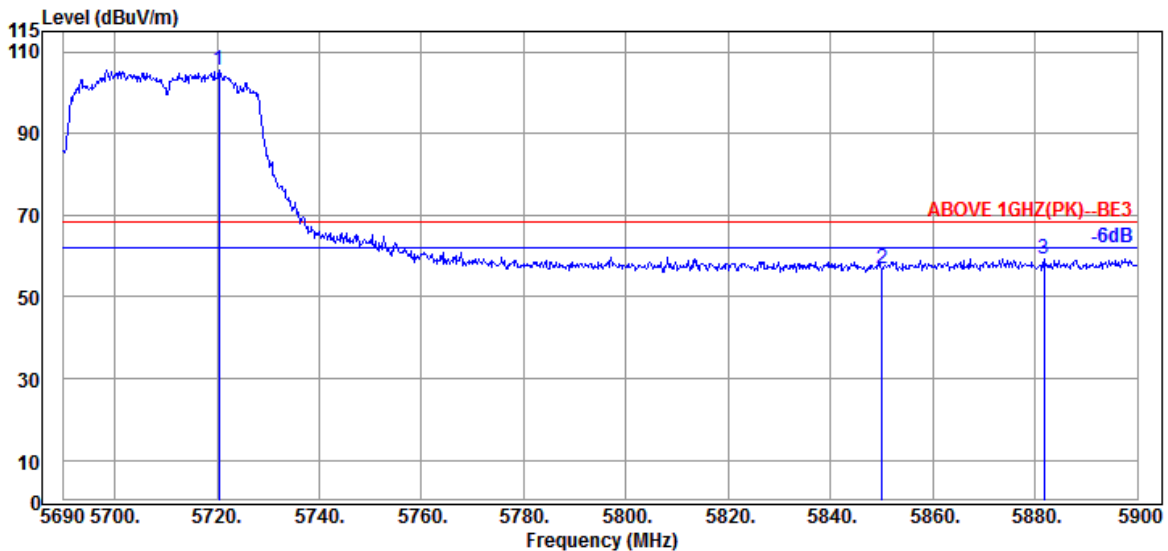


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.450	33.90	9.19	39.30	101.71	105.50	---	---	Peak
5850.020	34.00	9.25	39.33	52.85	56.77	68.20	11.43	Peak
5881.730	34.07	9.27	39.34	55.43	59.43	68.20	8.77	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

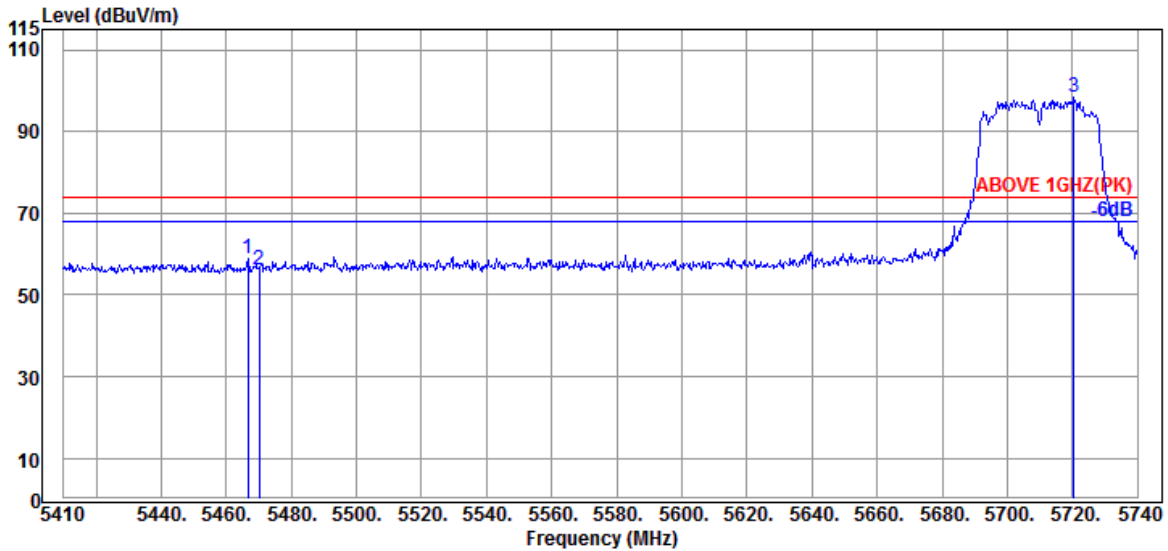

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.760	34.17	9.06	39.26	55.09	59.06	74.00	14.94	Peak
5470.060	34.17	9.06	39.26	52.25	56.22	74.00	17.78	Peak
@ 5720.530	33.90	9.19	39.30	94.54	98.33	---	---	Peak

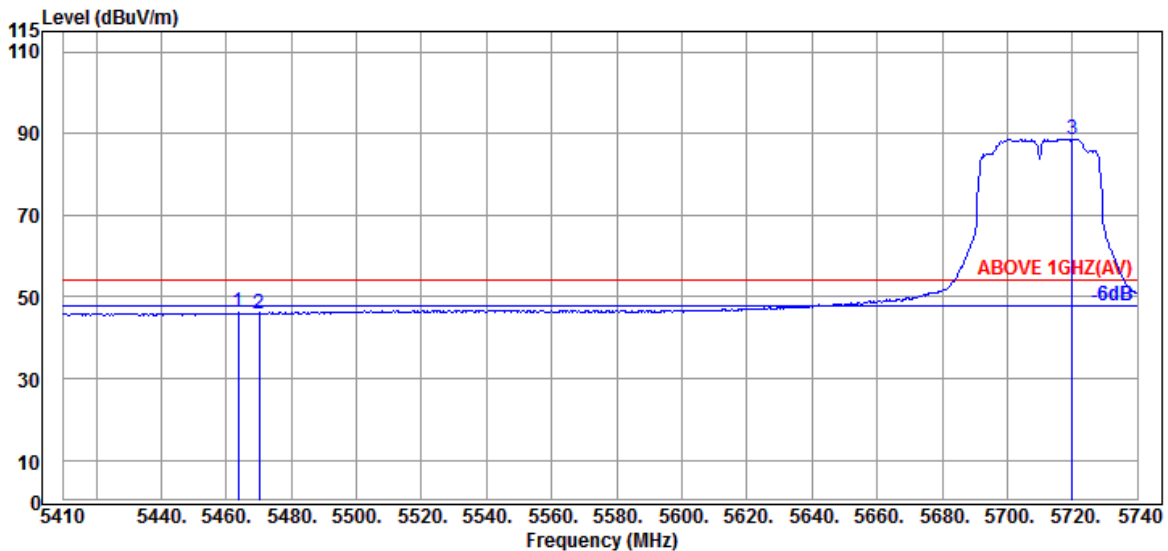


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.17	9.06	39.26	42.07	46.04	54.00	7.96	Average
5470.060	34.17	9.06	39.26	42.06	46.03	54.00	7.97	Average
@ 5719.870	33.90	9.19	39.30	84.92	88.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

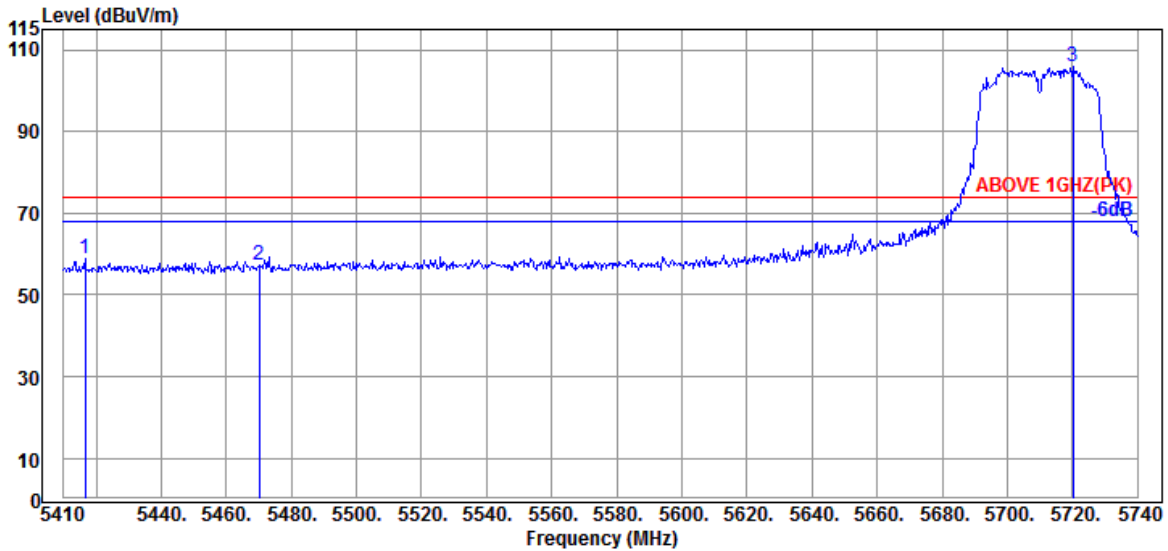

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.600	34.20	9.04	39.27	54.78	58.75	74.00	15.25	Peak
5470.060	34.17	9.06	39.26	53.26	57.23	74.00	16.77	Peak
@ 5720.200	33.90	9.19	39.30	102.24	106.03	---	---	Peak

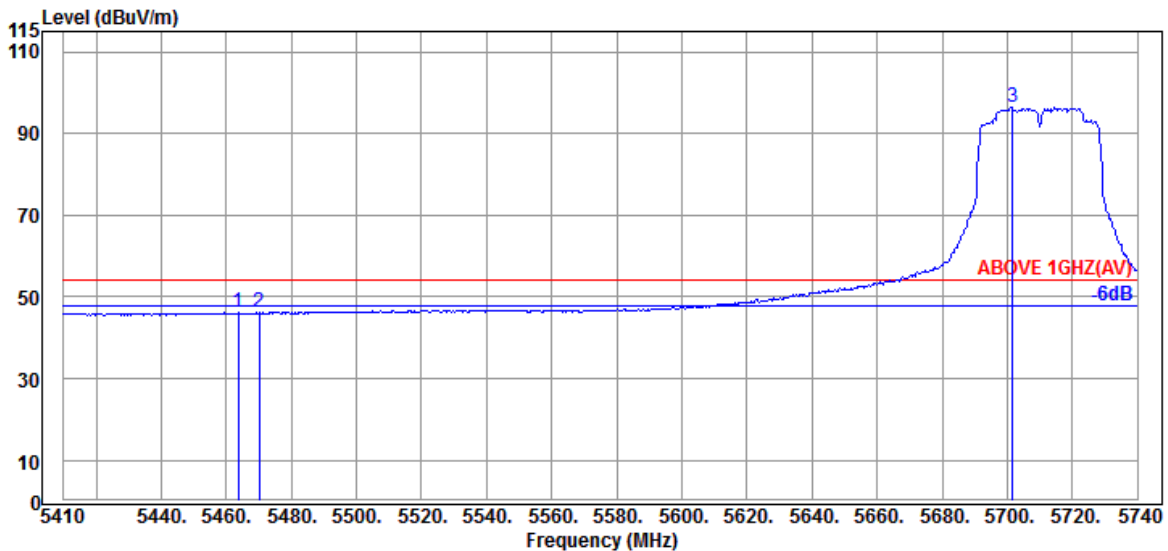


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.17	9.06	39.26	42.15	46.12	54.00	7.88	Average
5470.060	34.17	9.06	39.26	42.24	46.21	54.00	7.79	Average
@ 5701.720	33.90	9.18	39.30	92.49	96.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

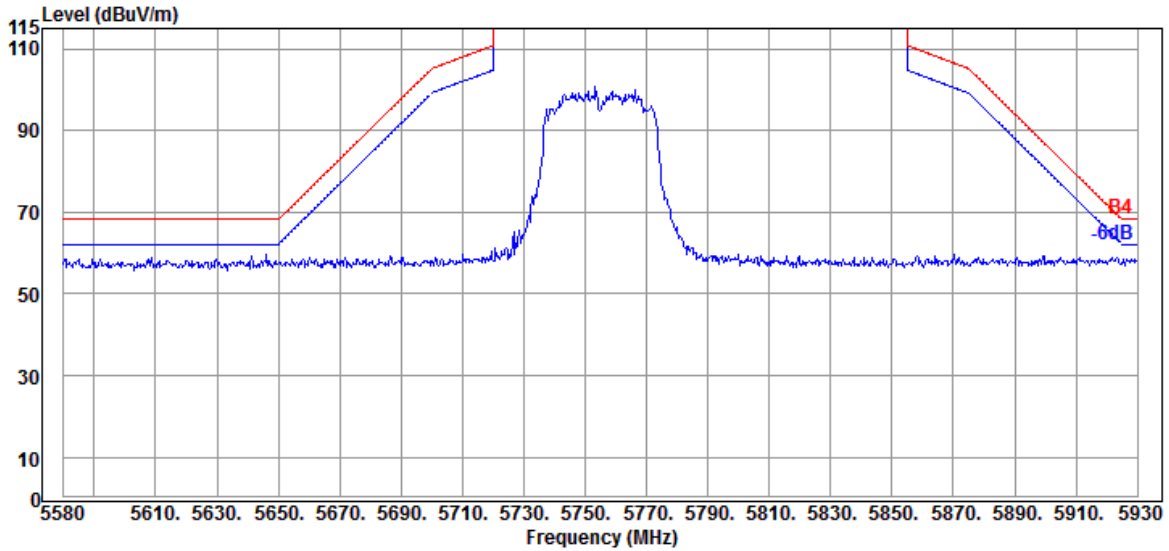


Antenna at Vertical Polarization

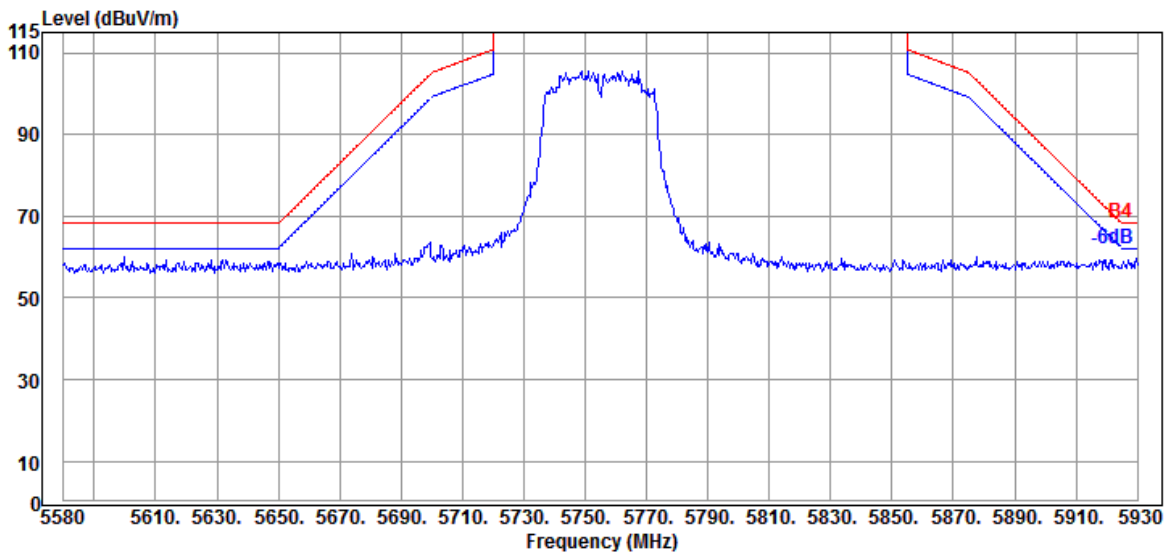


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

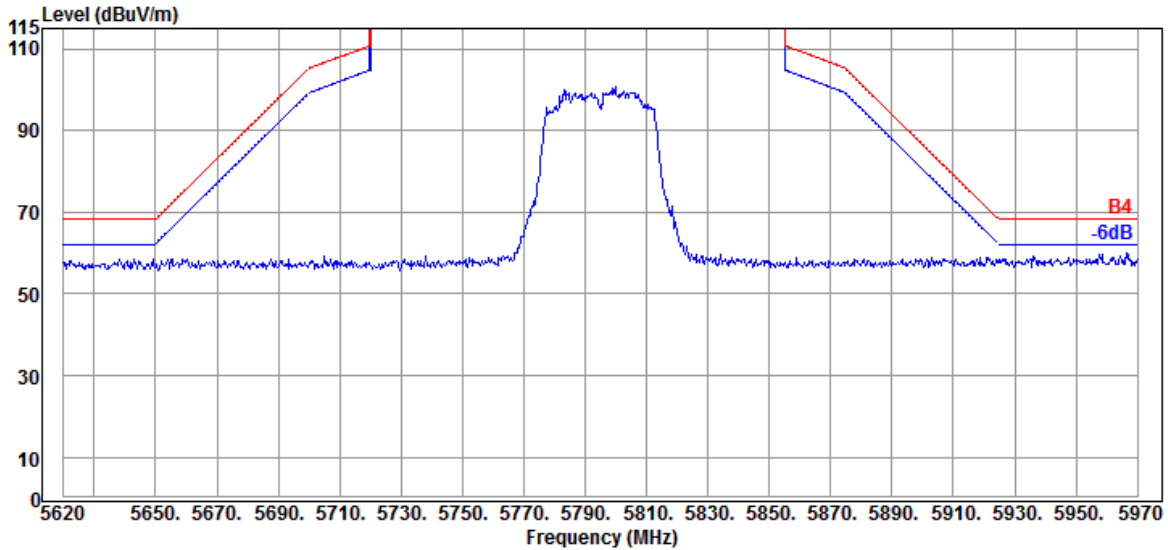

Antenna at Vertical Polarization

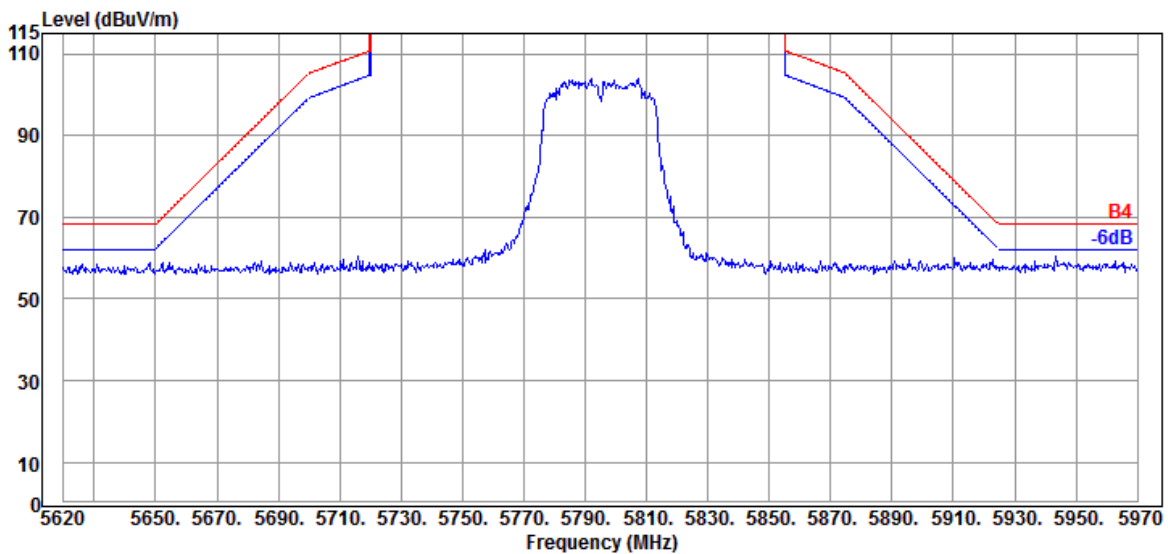


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

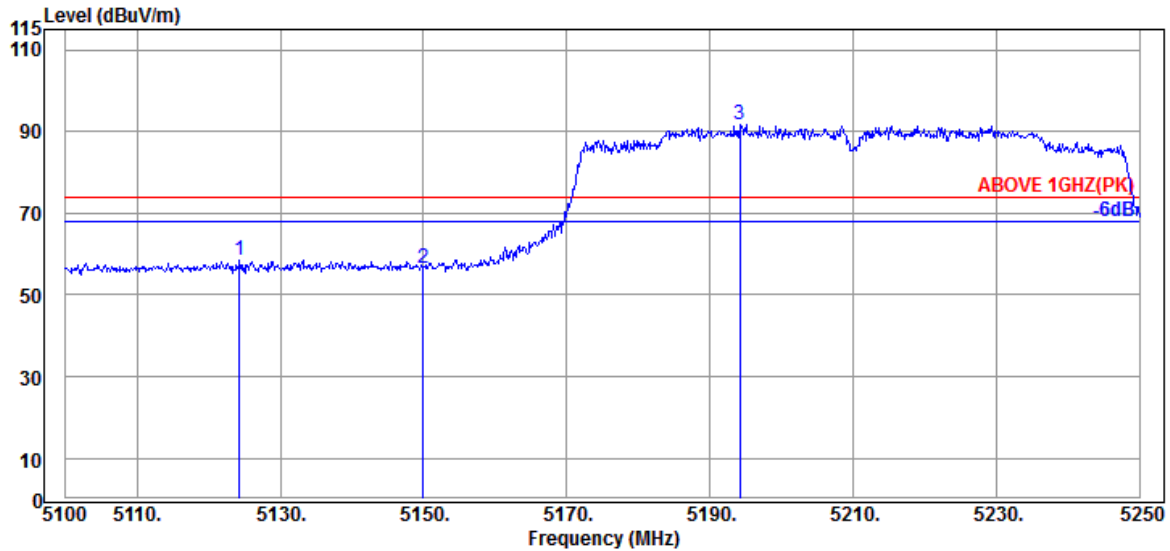

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.300	33.70	8.87	39.29	55.22	58.50	74.00	15.50	Peak
5149.950	33.70	8.88	39.29	53.37	56.66	74.00	17.34	Peak
@ 5194.200	33.90	8.91	39.28	88.26	91.79	---	---	Peak

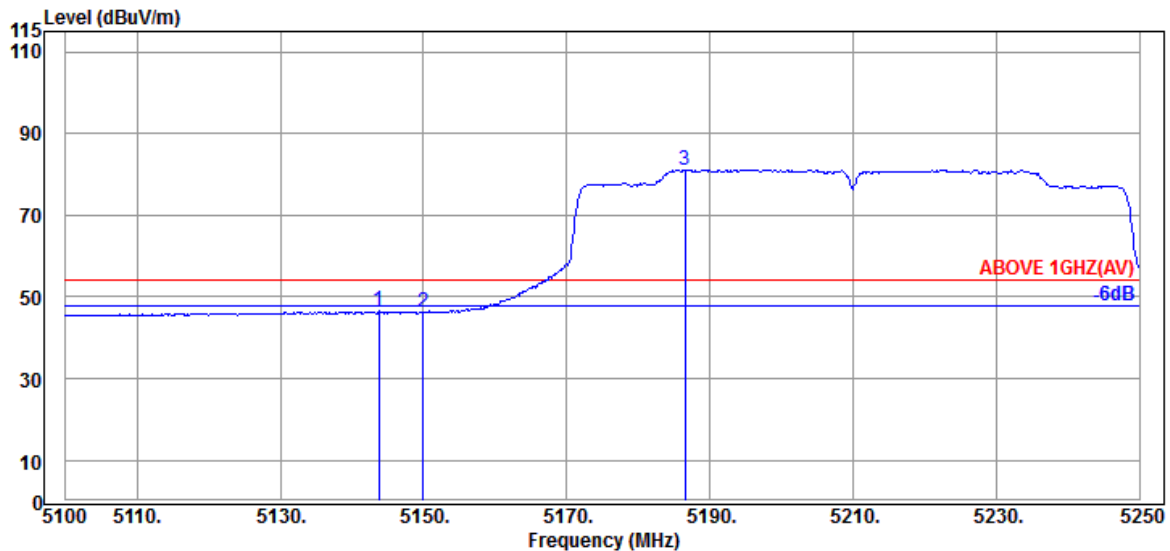


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	33.70	8.88	39.29	43.15	46.44	54.00	7.56	Average
5149.950	33.70	8.88	39.29	42.83	46.12	54.00	7.88	Average
@ 5186.550	33.90	8.91	39.28	77.60	81.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

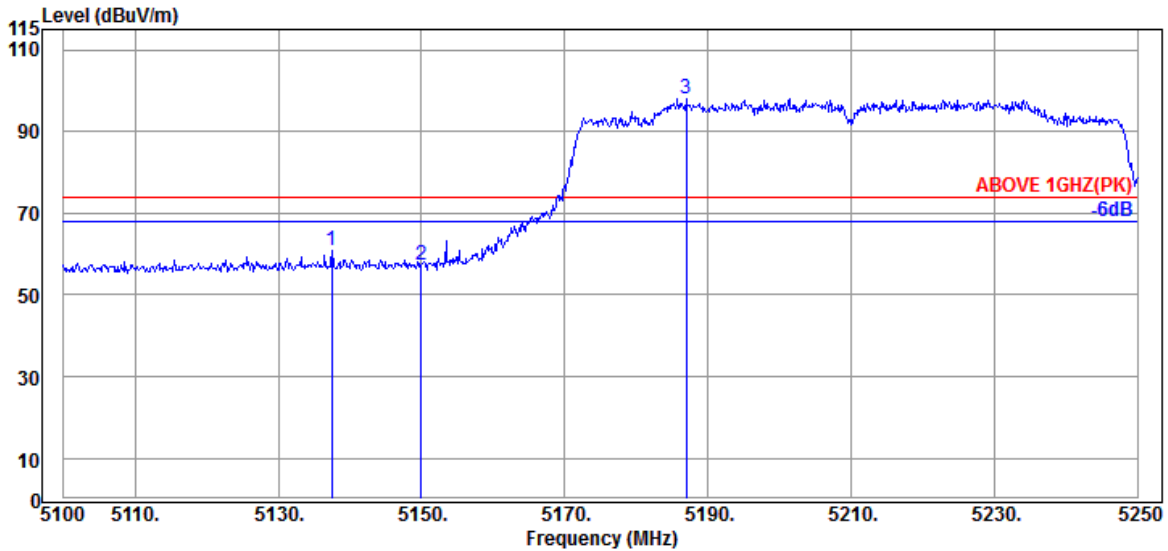

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.500	33.70	8.88	39.29	57.43	60.72	74.00	13.28	Peak
5149.950	33.70	8.88	39.29	54.14	57.43	74.00	16.57	Peak
@ 5187.000	33.90	8.91	39.28	94.54	98.07	---	---	Peak

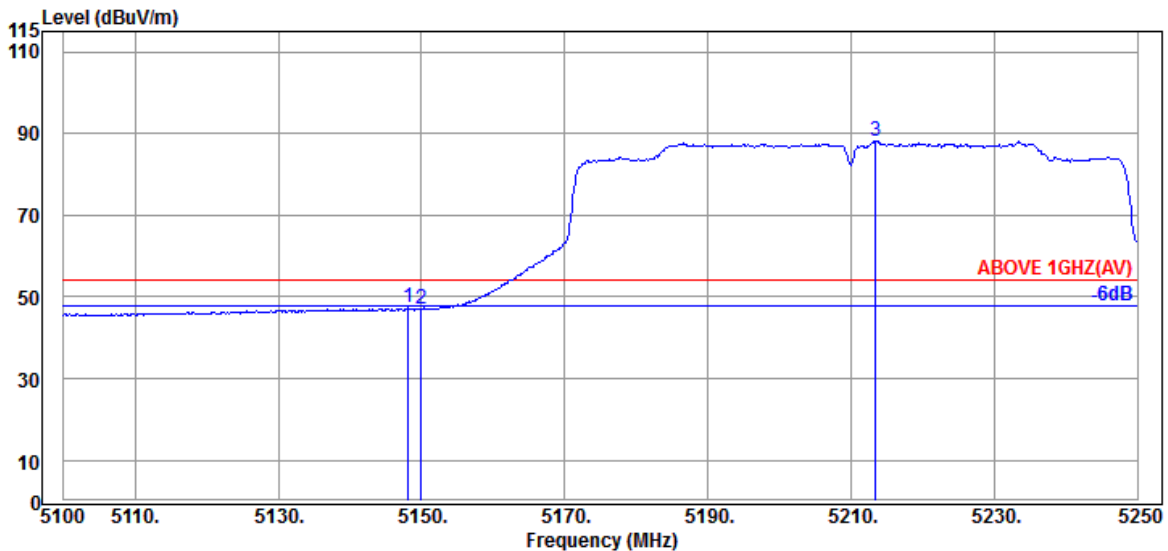


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	33.70	8.88	39.29	44.05	47.34	54.00	6.66	Average
5149.950	33.70	8.88	39.29	43.70	46.99	54.00	7.01	Average
@ 5213.400	33.88	8.92	39.28	84.72	88.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

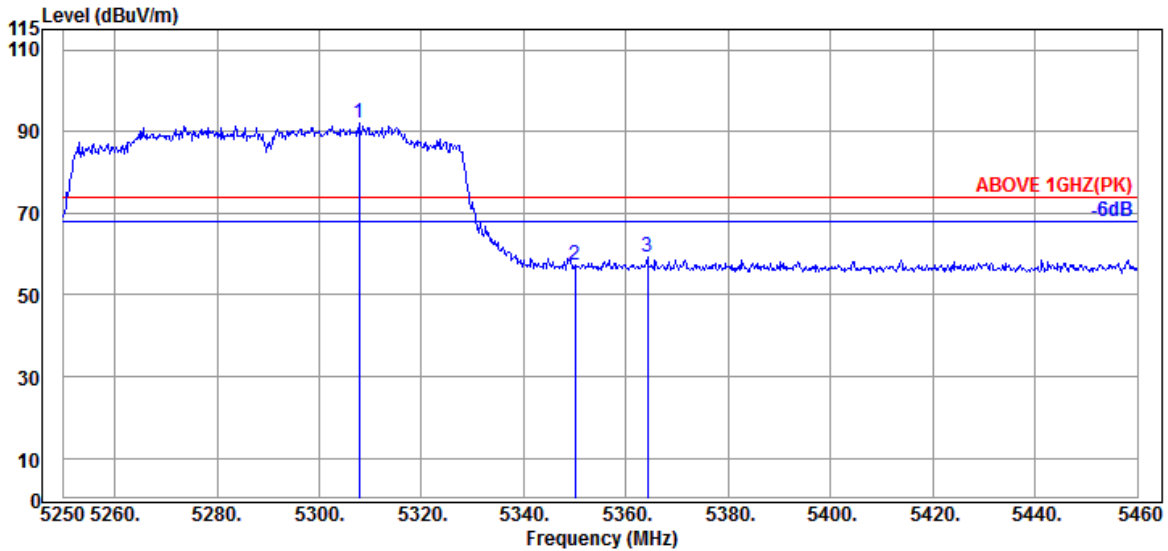

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.750	33.90	8.97	39.28	88.43	92.02	---	---	Peak
5349.960	34.00	8.99	39.27	53.72	57.44	74.00	16.56	Peak
5364.240	34.07	9.00	39.27	55.54	59.34	74.00	14.66	Peak

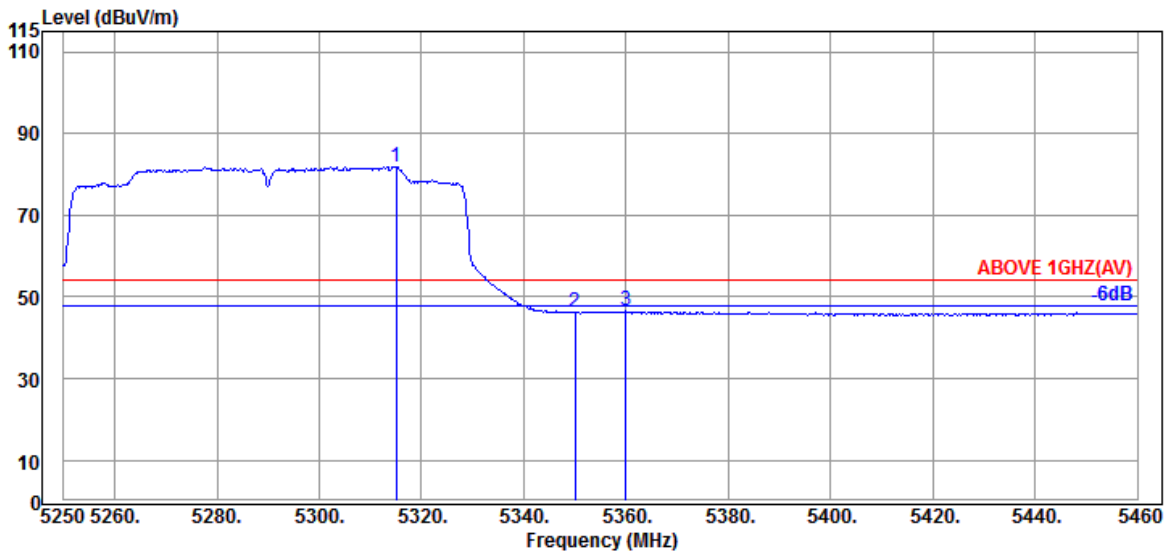


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.100	33.93	8.98	39.27	78.32	81.96	---	---	Average
5349.960	34.00	8.99	39.27	42.50	46.22	54.00	7.78	Average
5360.040	34.07	9.00	39.27	42.66	46.46	54.00	7.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

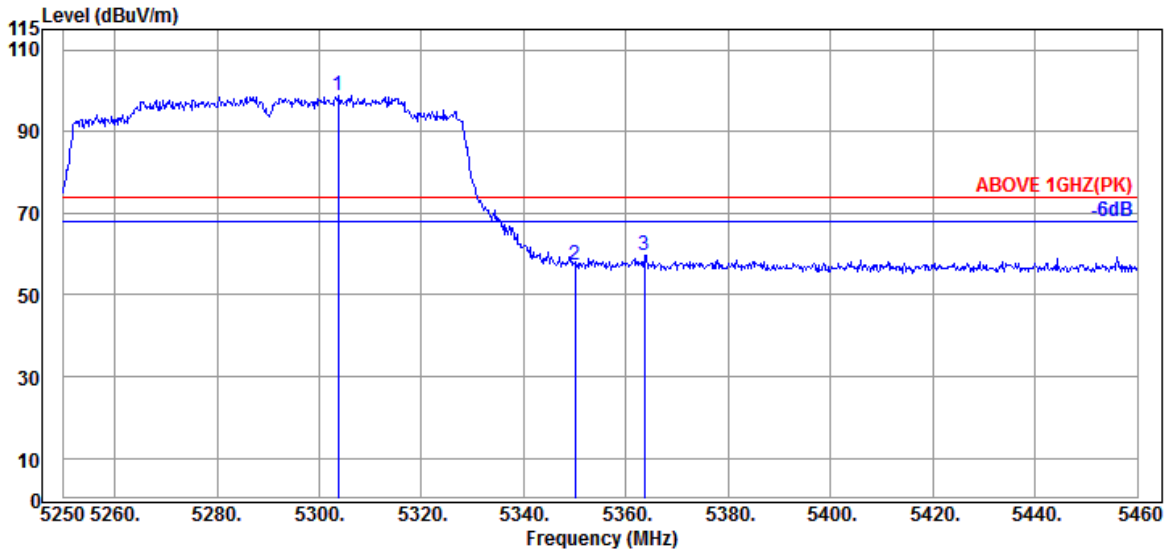

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.760	33.90	8.97	39.28	95.29	98.88	---	---	Peak
5349.960	34.00	8.99	39.27	53.51	57.23	74.00	16.77	Peak
5363.610	34.07	9.00	39.27	56.01	59.81	74.00	14.19	Peak

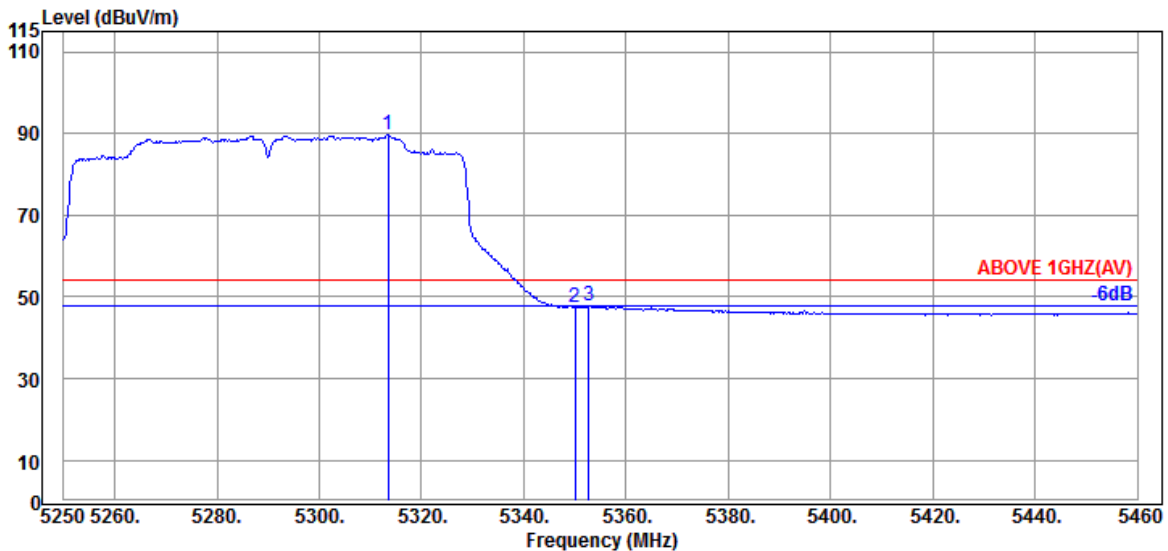


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.420	33.93	8.98	39.27	86.01	89.65	---	---	Average
5349.960	34.00	8.99	39.27	43.79	47.51	54.00	6.49	Average
5352.690	34.00	8.99	39.27	43.95	47.67	54.00	6.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

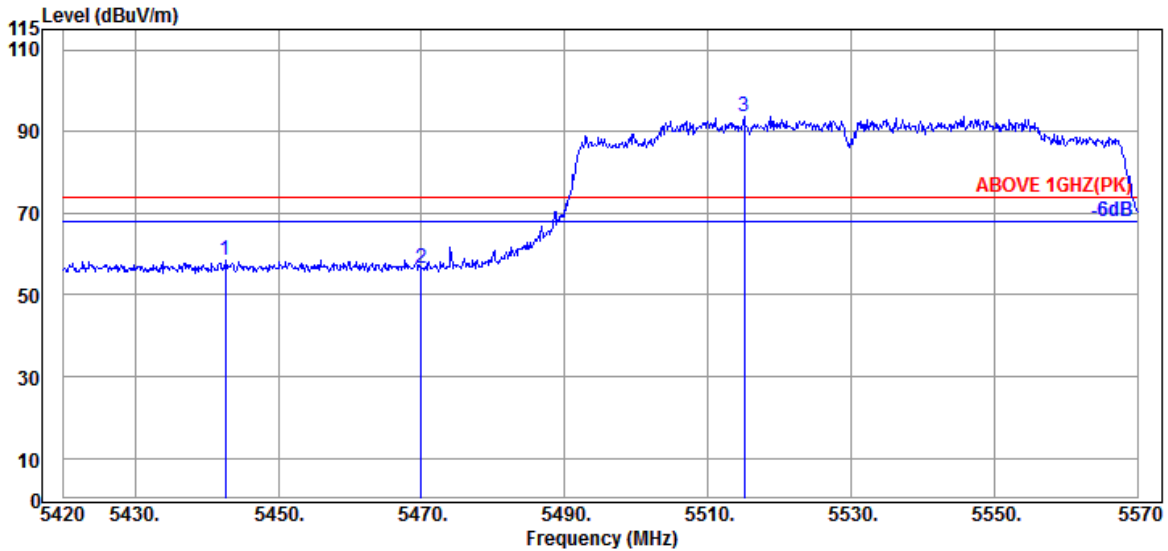

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.650	34.20	9.04	39.26	54.52	58.50	74.00	15.50	Peak
5469.950	34.17	9.06	39.26	52.44	56.41	74.00	17.59	Peak
@ 5515.100	34.07	9.09	39.26	89.85	93.75	---	---	Peak

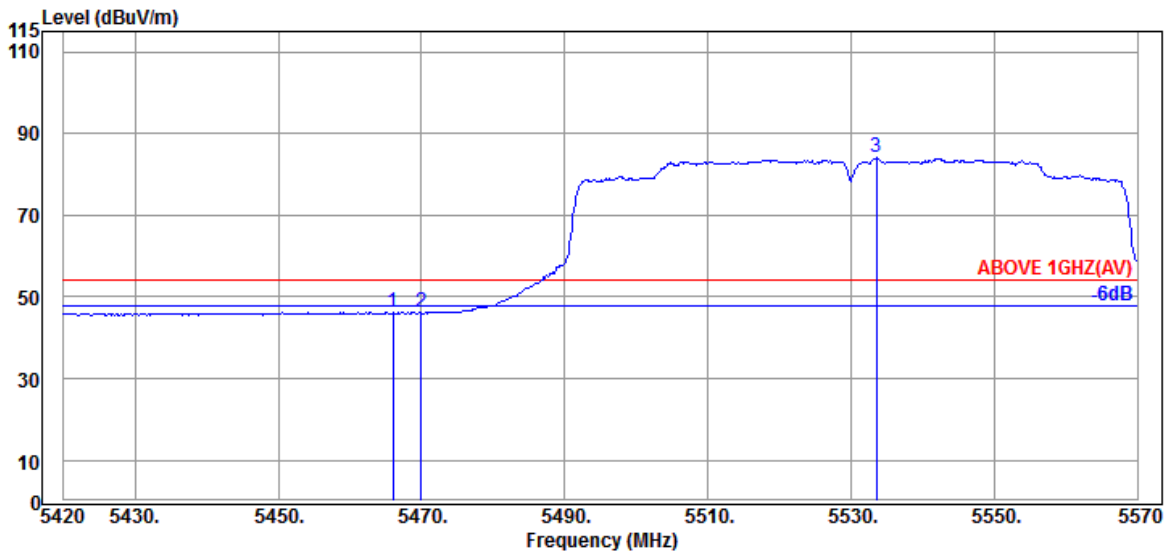


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.050	34.17	9.06	39.26	42.22	46.19	54.00	7.81	Average
5469.950	34.17	9.06	39.26	42.21	46.18	54.00	7.82	Average
@ 5533.550	34.03	9.09	39.27	80.14	83.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

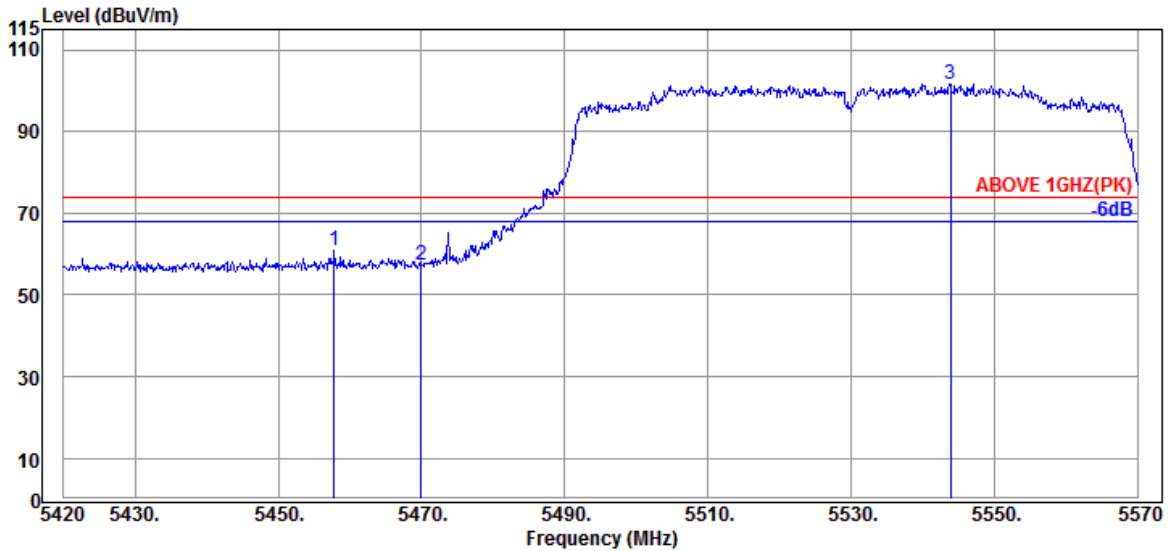

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.20	9.05	39.26	56.86	60.85	74.00	13.15	Peak
5469.950	34.17	9.06	39.26	53.22	57.19	74.00	16.81	Peak
@ 5543.900	34.00	9.10	39.27	97.75	101.58	---	---	Peak

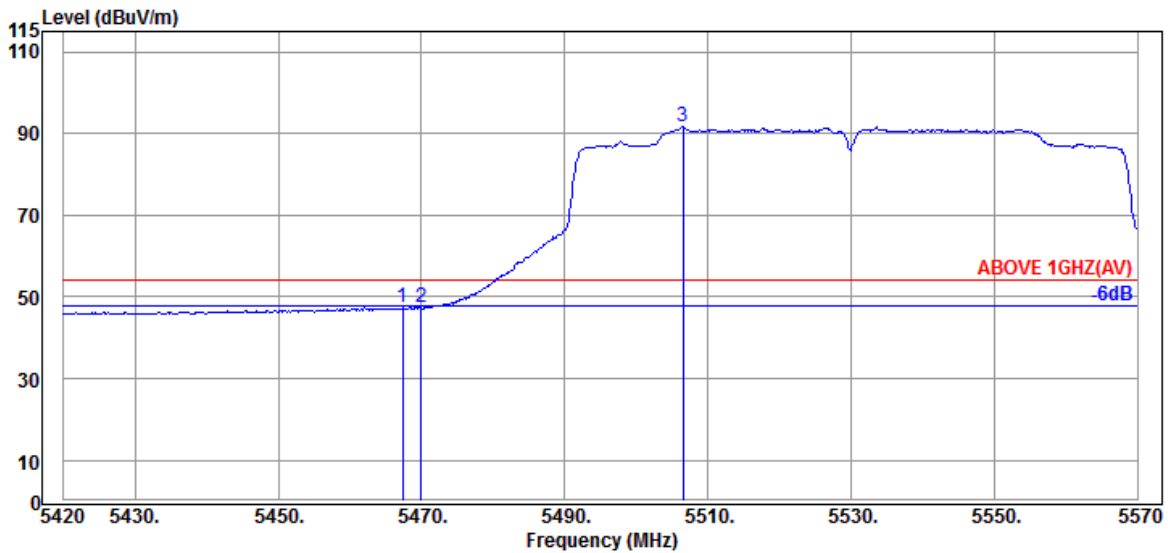


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	9.06	39.26	43.32	47.29	54.00	6.71	Average
5469.950	34.17	9.06	39.26	43.30	47.27	54.00	6.73	Average
@ 5506.550	34.10	9.08	39.26	87.71	91.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

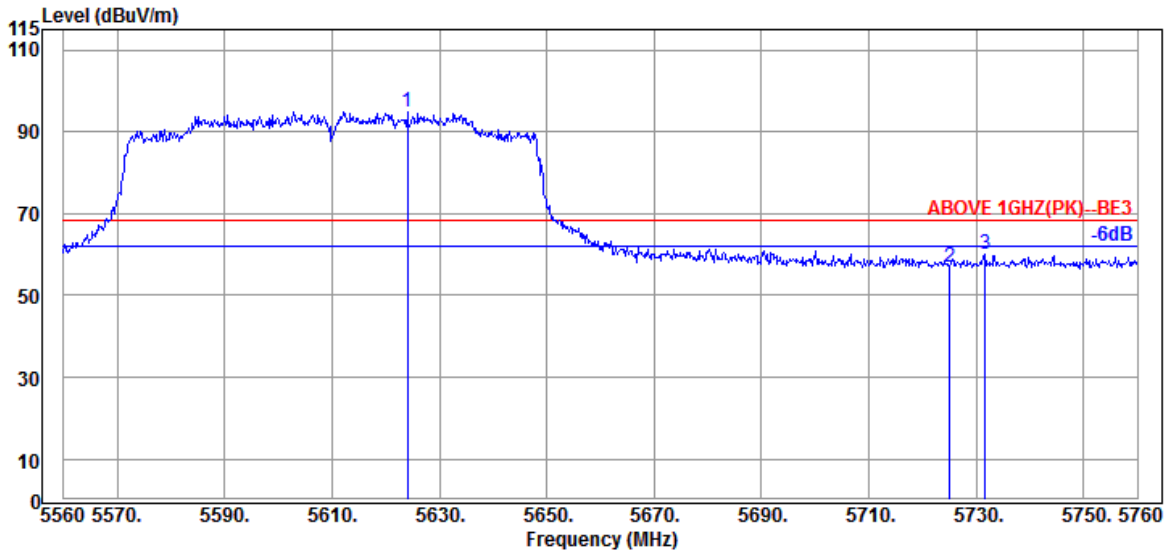

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.000	33.93	9.14	39.29	91.04	94.82	---	---	Peak
5725.000	33.90	9.20	39.30	53.08	56.88	68.20	11.32	Peak
5731.600	33.90	9.20	39.31	56.14	59.93	68.20	8.27	Peak

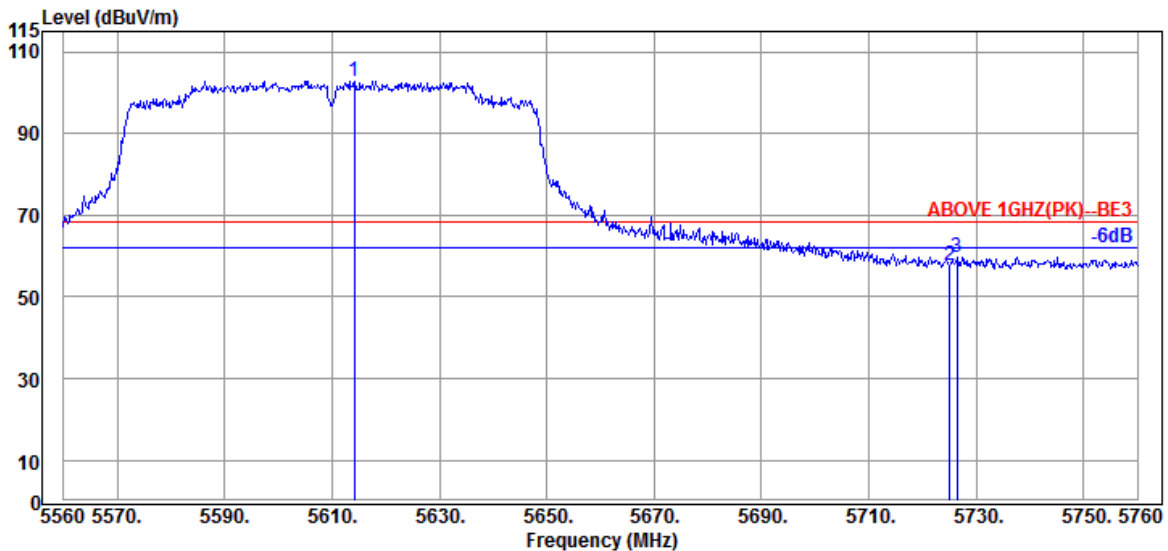


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5614.200	33.97	9.14	39.28	99.04	102.87	---	---	Peak
5725.000	33.90	9.20	39.30	53.97	57.77	68.20	10.43	Peak
5726.400	33.90	9.20	39.31	55.99	59.78	68.20	8.42	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

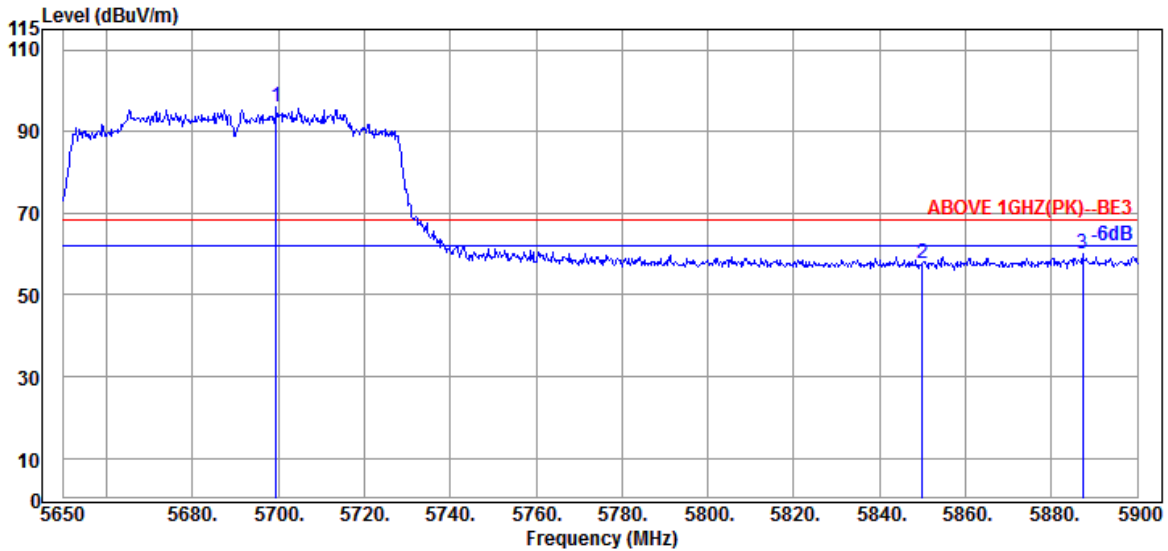

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.500	33.90	9.18	39.30	92.07	95.85	---	---	Peak
5850.000	34.00	9.25	39.33	53.60	57.52	68.20	10.68	Peak
5887.250	34.07	9.27	39.34	55.92	59.92	68.20	8.28	Peak

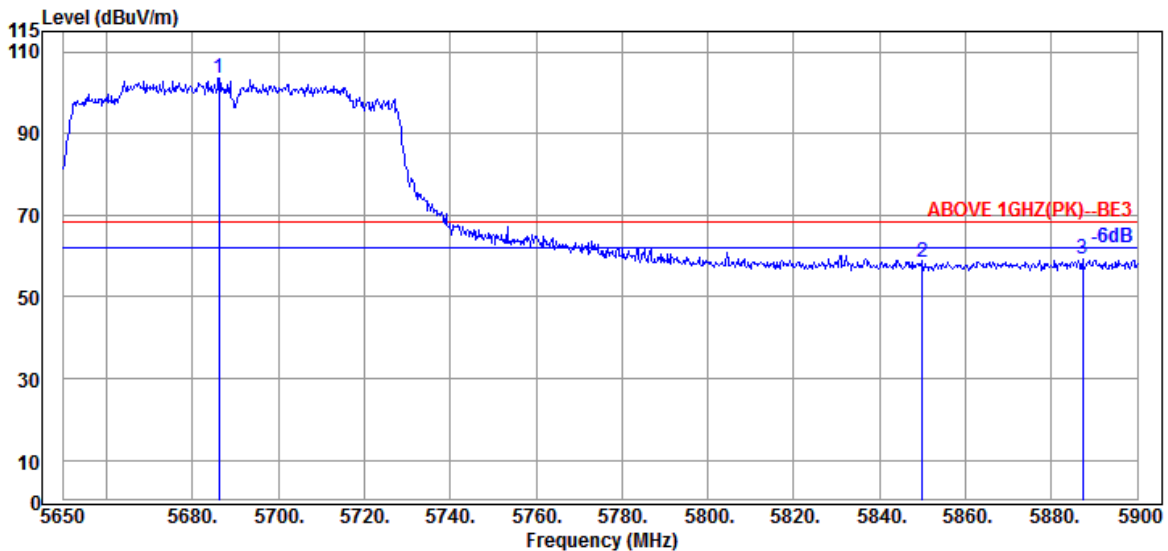


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5686.250	33.90	9.17	39.30	99.69	103.46	---	---	Peak
5850.000	34.00	9.25	39.33	54.60	58.52	68.20	9.68	Peak
5887.250	34.07	9.27	39.34	55.36	59.36	68.20	8.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

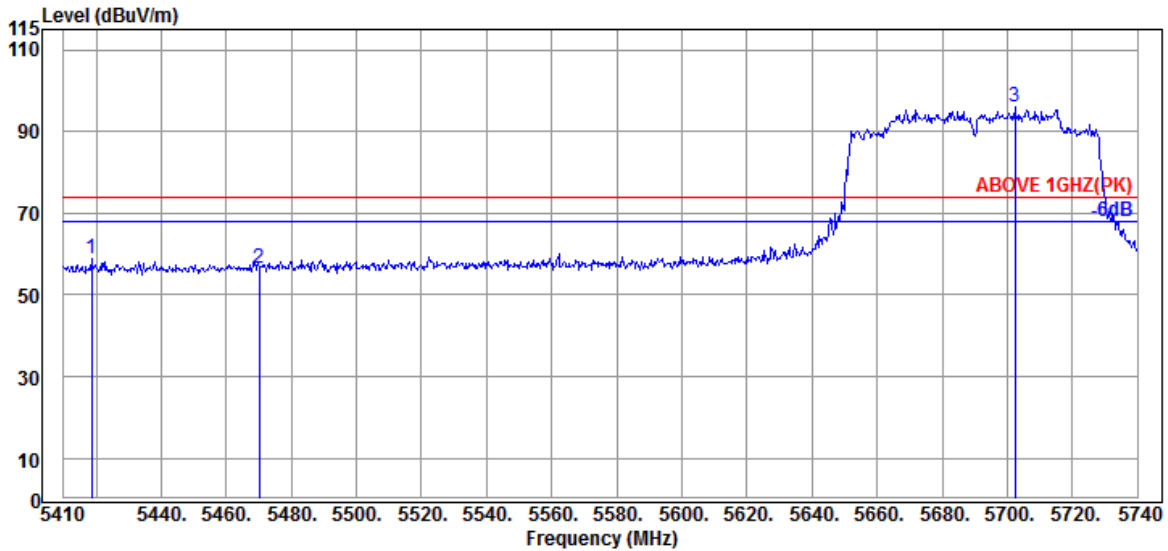

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.580	34.20	9.04	39.27	54.87	58.84	74.00	15.16	Peak
5470.060	34.17	9.06	39.26	52.55	56.52	74.00	17.48	Peak
@ 5702.380	33.90	9.18	39.30	92.06	95.84	---	---	Peak

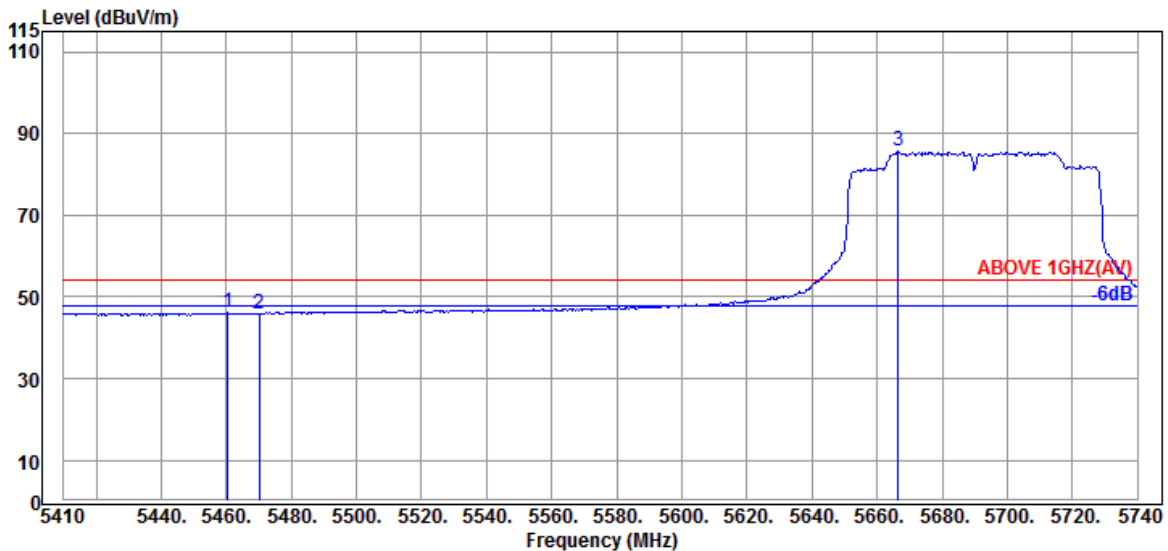


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.490	34.20	9.05	39.26	42.20	46.19	54.00	7.81	Average
5470.060	34.17	9.06	39.26	41.87	45.84	54.00	8.16	Average
@ 5666.410	33.90	9.16	39.29	81.81	85.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

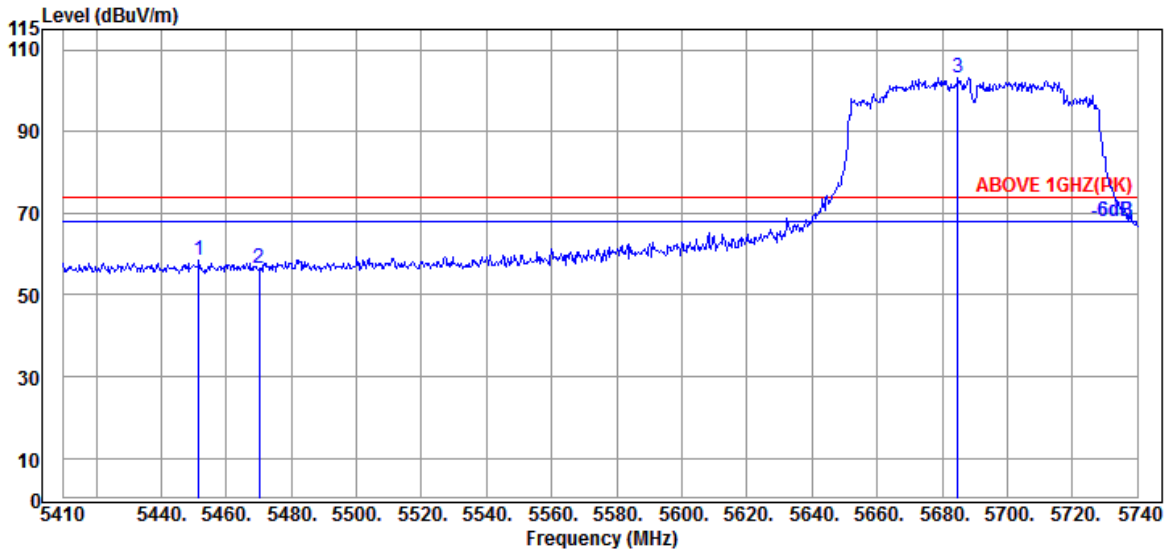

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.580	34.20	9.05	39.26	54.44	58.43	74.00	15.57	Peak
5470.060	34.17	9.06	39.26	52.66	56.63	74.00	17.37	Peak
@ 5684.890	33.90	9.17	39.30	99.35	103.12	---	---	Peak

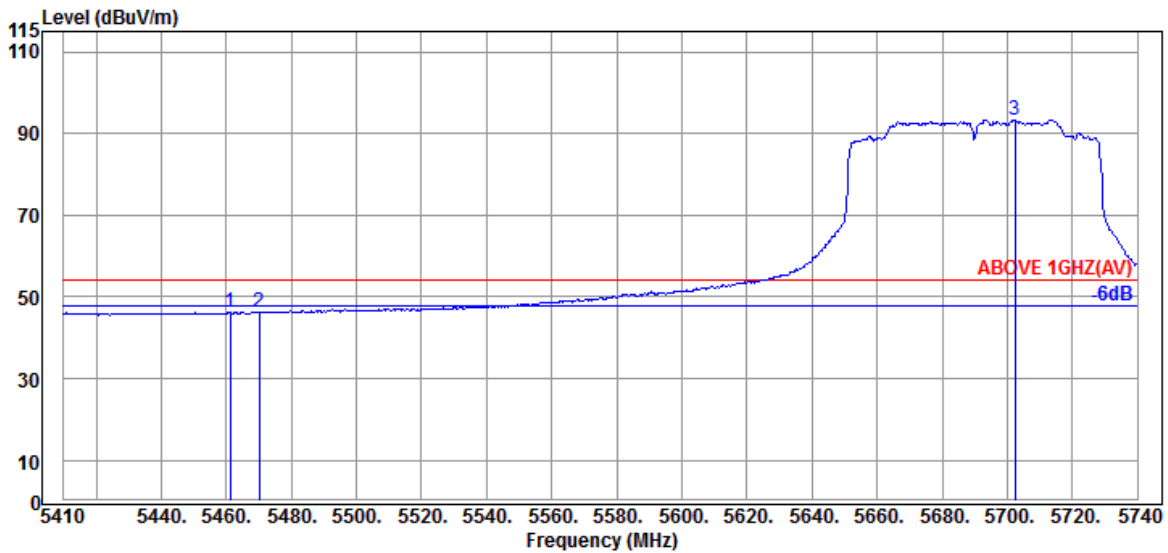


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.20	9.05	39.26	42.25	46.24	54.00	7.76	Average
5470.060	34.17	9.06	39.26	42.17	46.14	54.00	7.86	Average
@ 5702.380	33.90	9.18	39.30	89.68	93.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

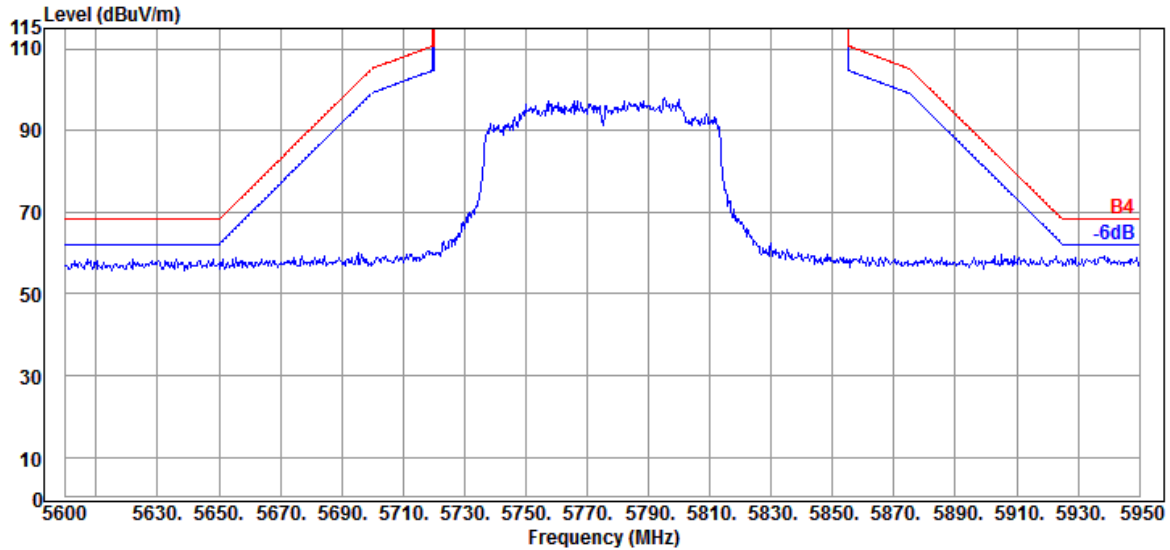

Antenna at Vertical Polarization

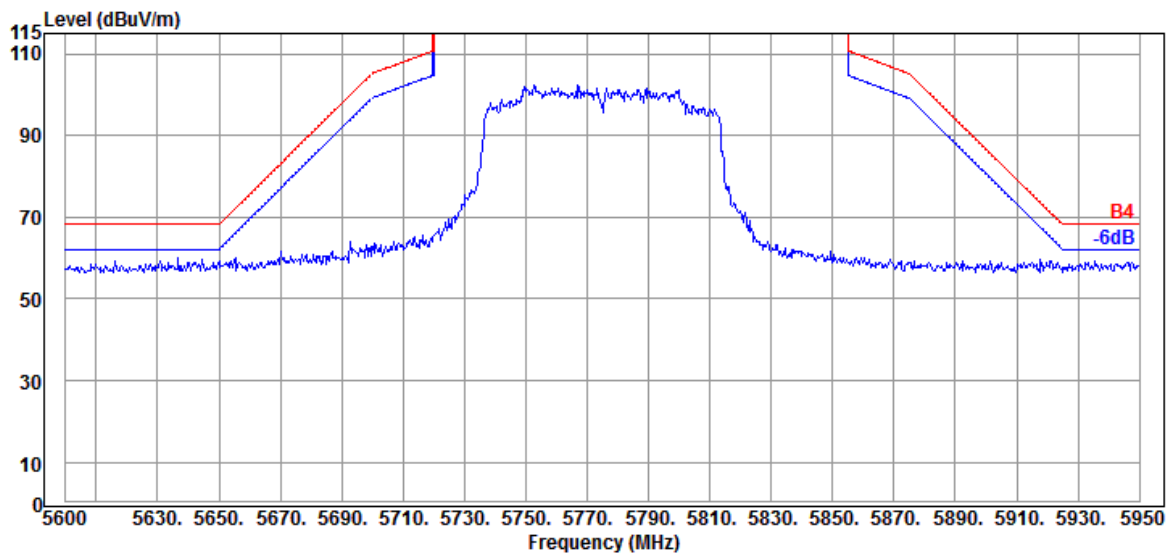


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

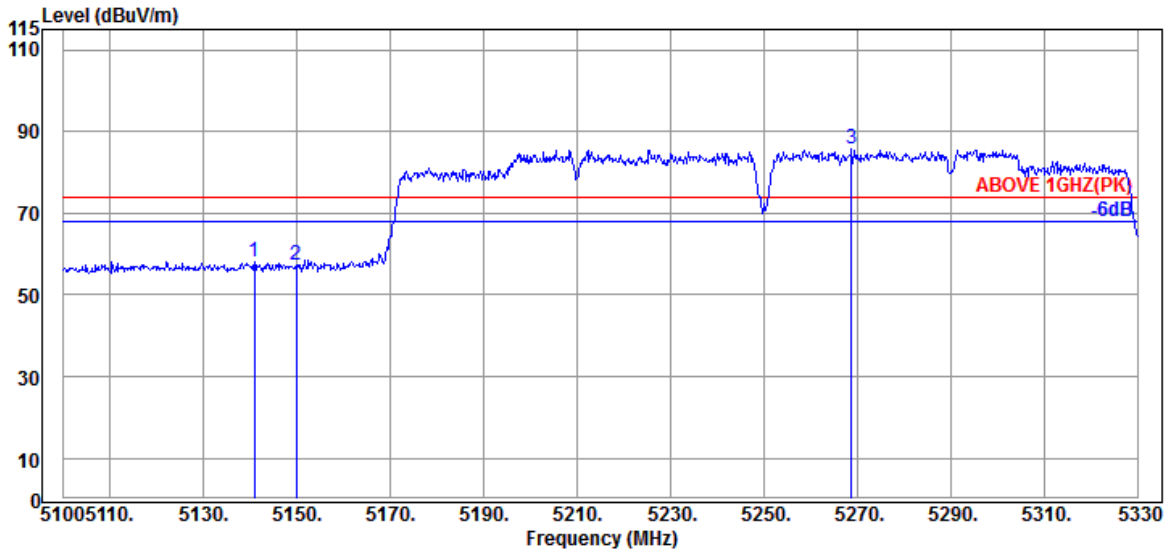

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.940	33.70	8.88	39.29	54.99	58.28	74.00	15.72	Peak
5149.910	33.70	8.88	39.29	53.96	57.25	74.00	16.75	Peak
@ 5268.820	33.83	8.95	39.28	82.07	85.57	---	---	Peak

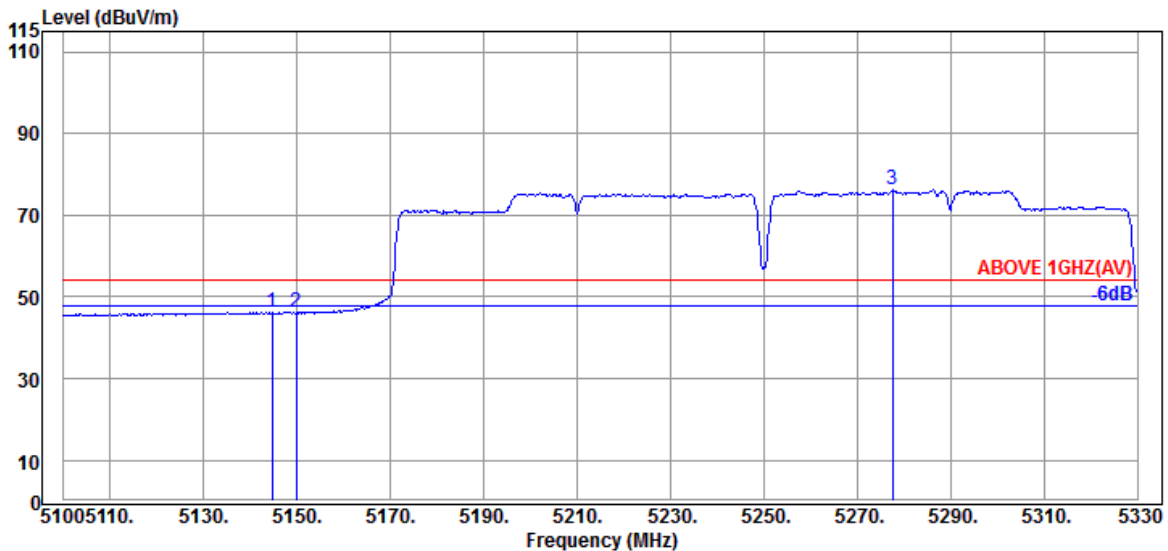


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.620	33.70	8.88	39.29	42.86	46.15	54.00	7.85	Average
5149.910	33.70	8.88	39.29	42.78	46.07	54.00	7.93	Average
@ 5277.560	33.87	8.96	39.28	72.61	76.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

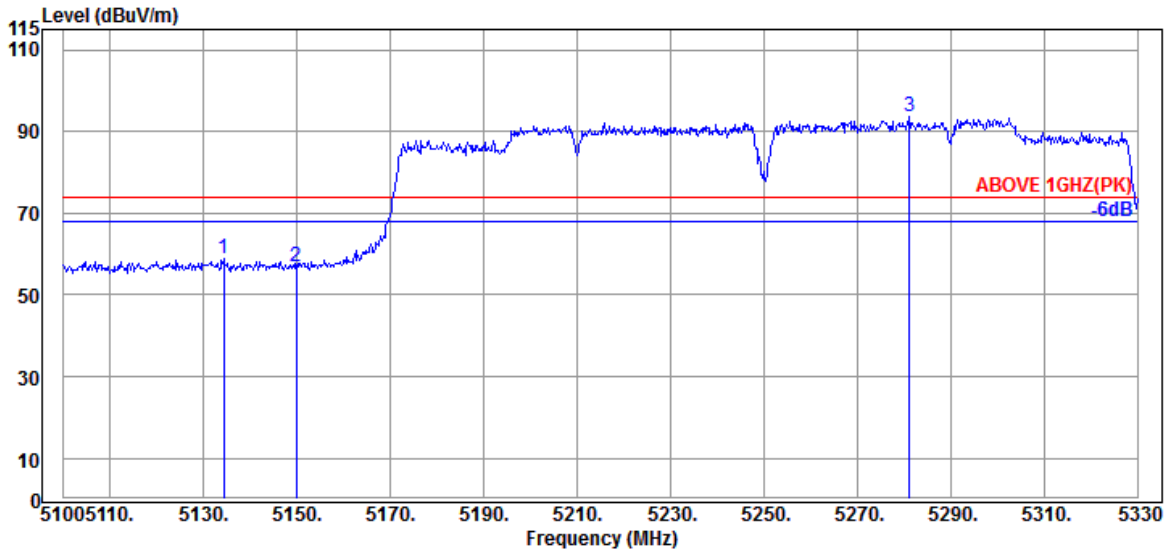

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.270	33.70	8.88	39.29	55.53	58.82	74.00	15.18	Peak
5149.910	33.70	8.88	39.29	53.49	56.78	74.00	17.22	Peak
@ 5281.240	33.87	8.96	39.28	90.10	93.65	---	---	Peak

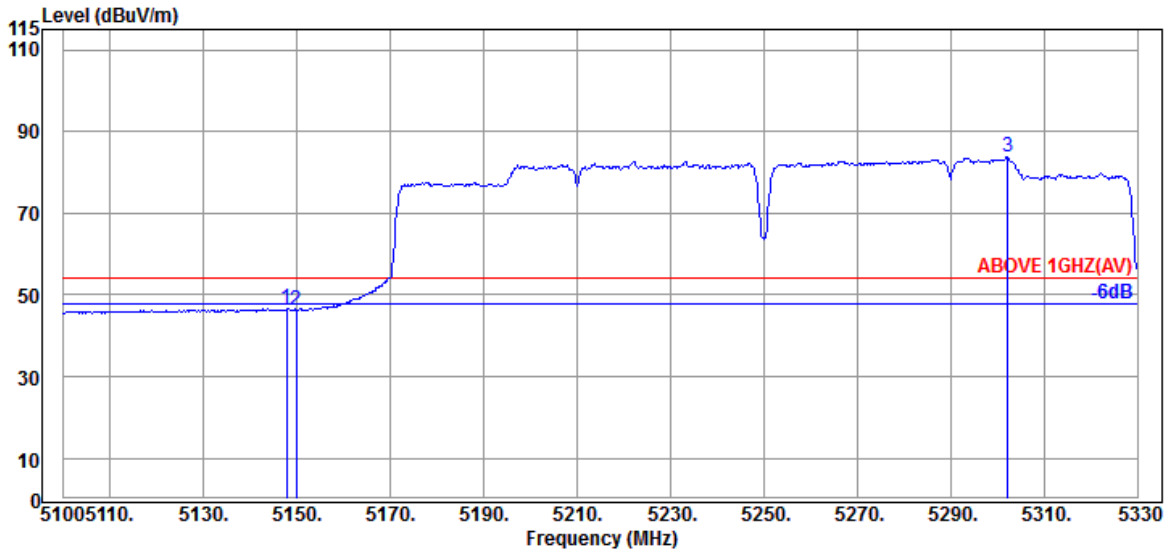


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	33.70	8.88	39.29	43.35	46.64	54.00	7.36	Average
5149.910	33.70	8.88	39.29	43.09	46.38	54.00	7.62	Average
@ 5302.170	33.90	8.97	39.28	80.00	83.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

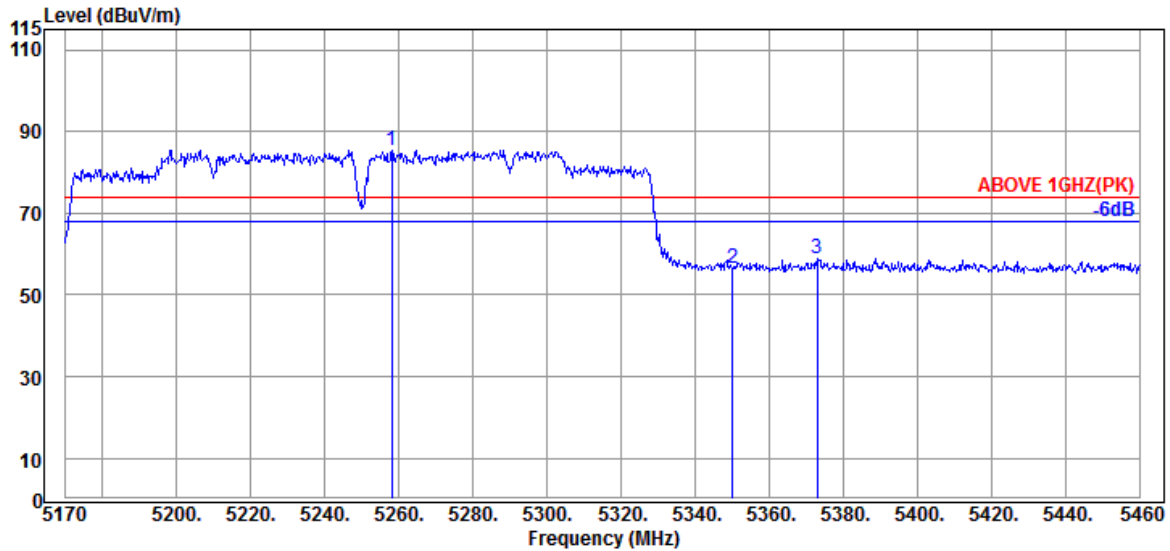

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5258.160	33.80	8.94	39.28	81.95	85.41	---	---	Peak
5350.090	34.00	8.99	39.27	52.91	56.63	74.00	17.37	Peak
5373.000	34.13	9.01	39.27	54.91	58.78	74.00	15.22	Peak

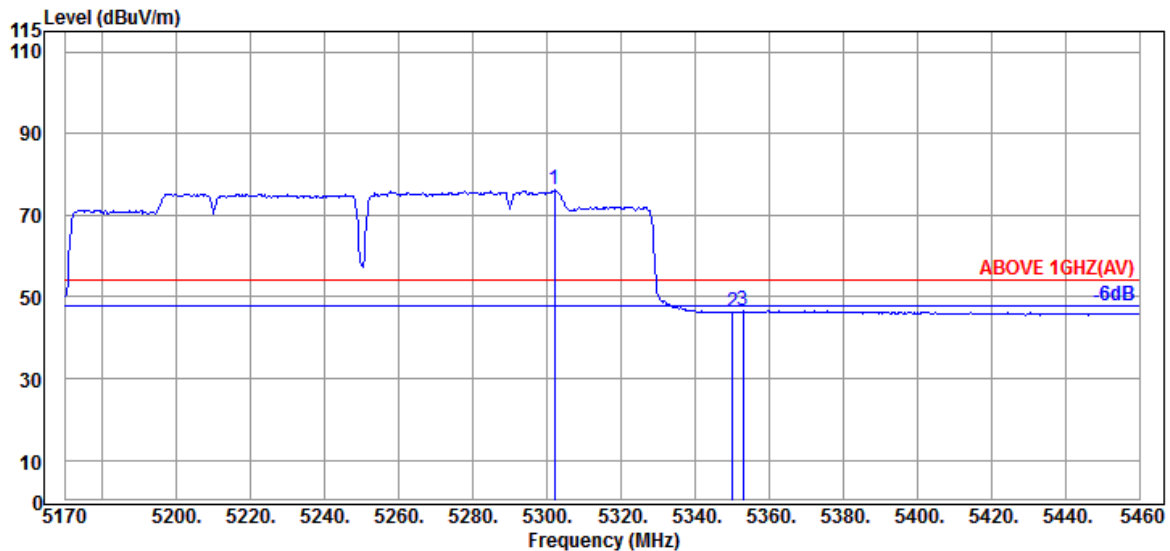


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.950	33.90	8.97	39.28	72.50	76.09	---	---	Average
5350.090	34.00	8.99	39.27	42.61	46.33	54.00	7.67	Average
5352.990	34.00	8.99	39.27	42.81	46.53	54.00	7.47	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

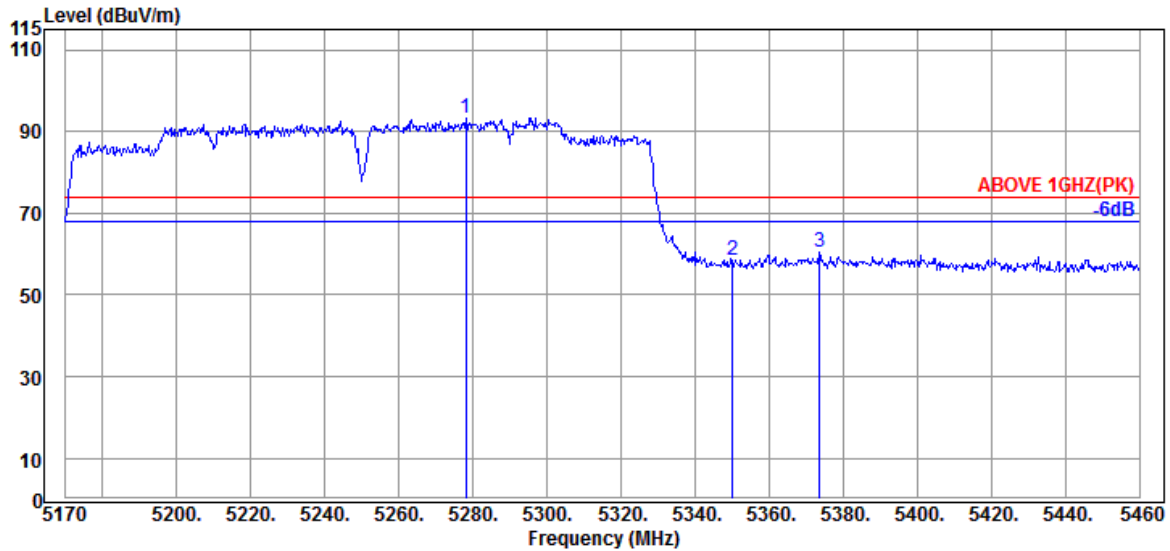

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.170	33.87	8.96	39.28	89.79	93.34	---	---	Peak
5350.090	34.00	8.99	39.27	54.77	58.49	74.00	15.51	Peak
5373.580	34.13	9.01	39.27	56.66	60.53	74.00	13.47	Peak

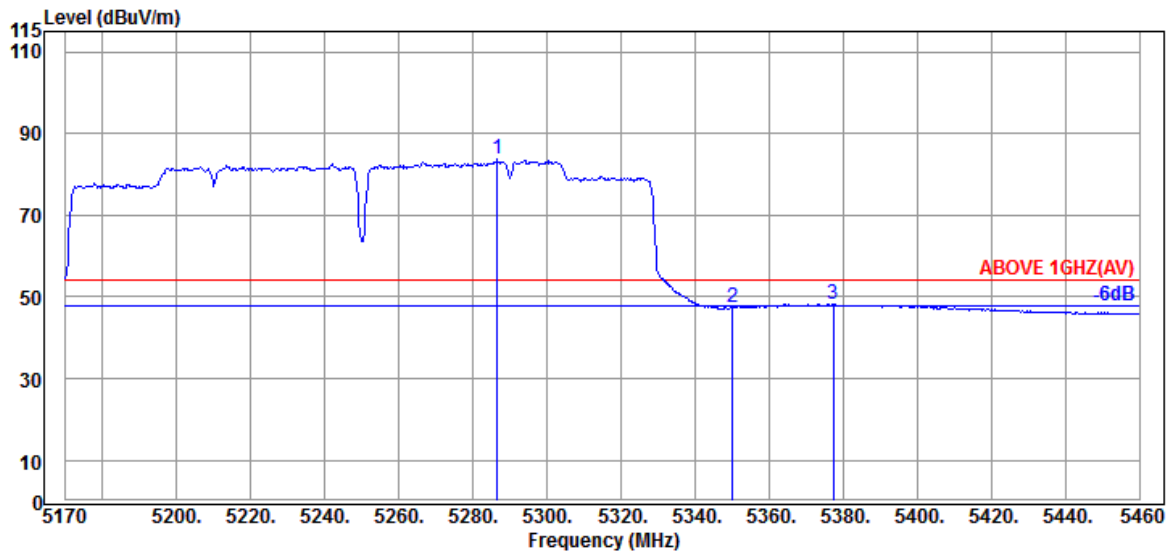


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	33.87	8.96	39.28	80.10	83.65	---	---	Average
5350.090	34.00	8.99	39.27	43.57	47.29	54.00	6.71	Average
5377.350	34.13	9.01	39.27	44.39	48.26	54.00	5.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

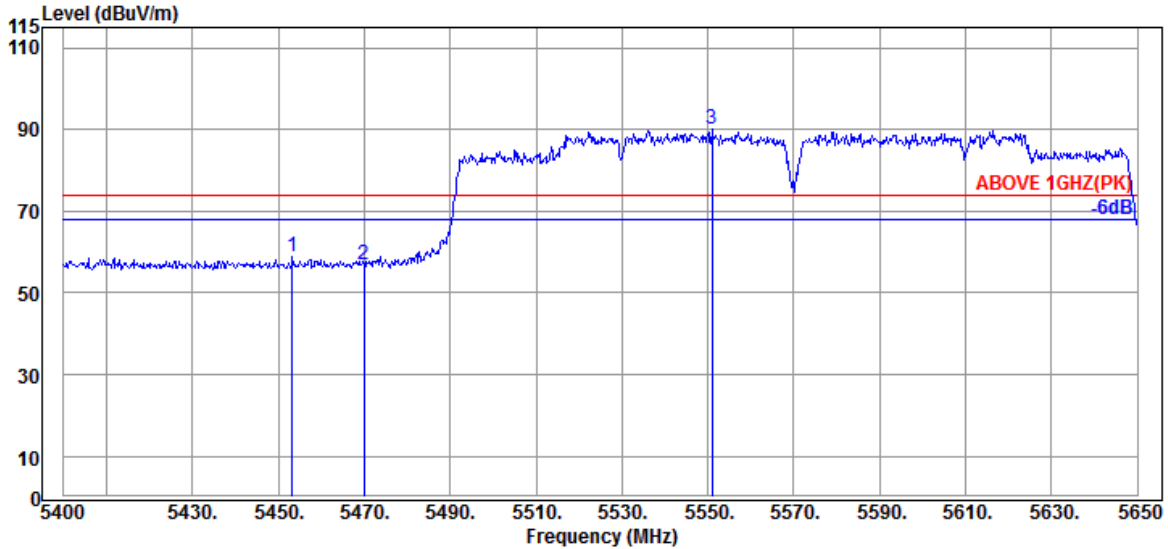

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5453.250	34.20	9.05	39.26	54.81	58.80	74.00	15.20	Peak
5470.000	34.17	9.06	39.26	52.87	56.84	74.00	17.16	Peak
@ 5551.000	34.00	9.10	39.27	86.27	90.10	---	---	Peak

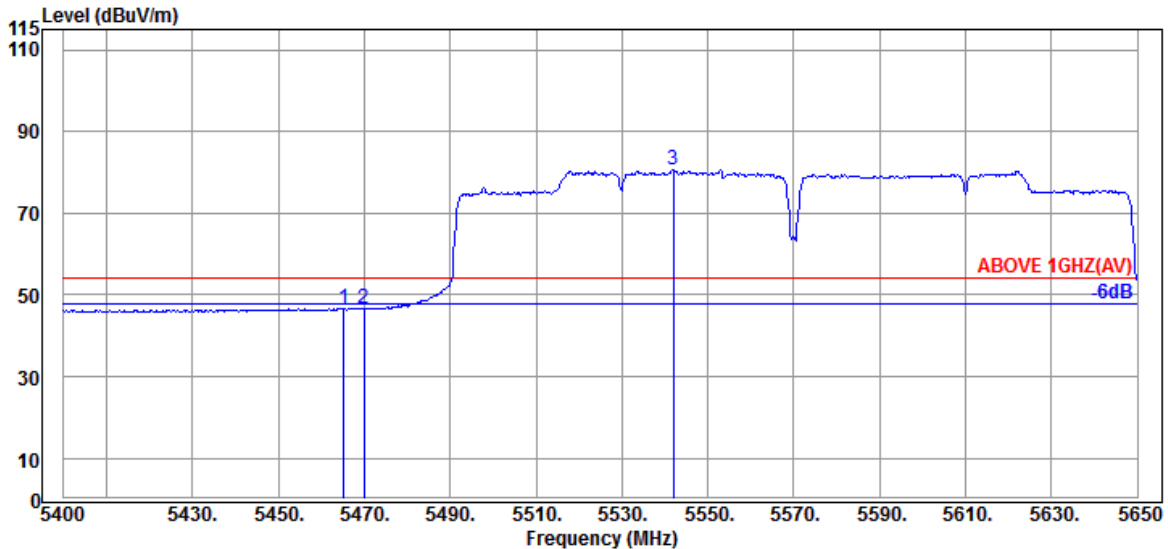


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.250	34.17	9.06	39.26	42.81	46.78	54.00	7.22	Average
5470.000	34.17	9.06	39.26	42.69	46.66	54.00	7.34	Average
@ 5542.000	34.03	9.09	39.27	76.72	80.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

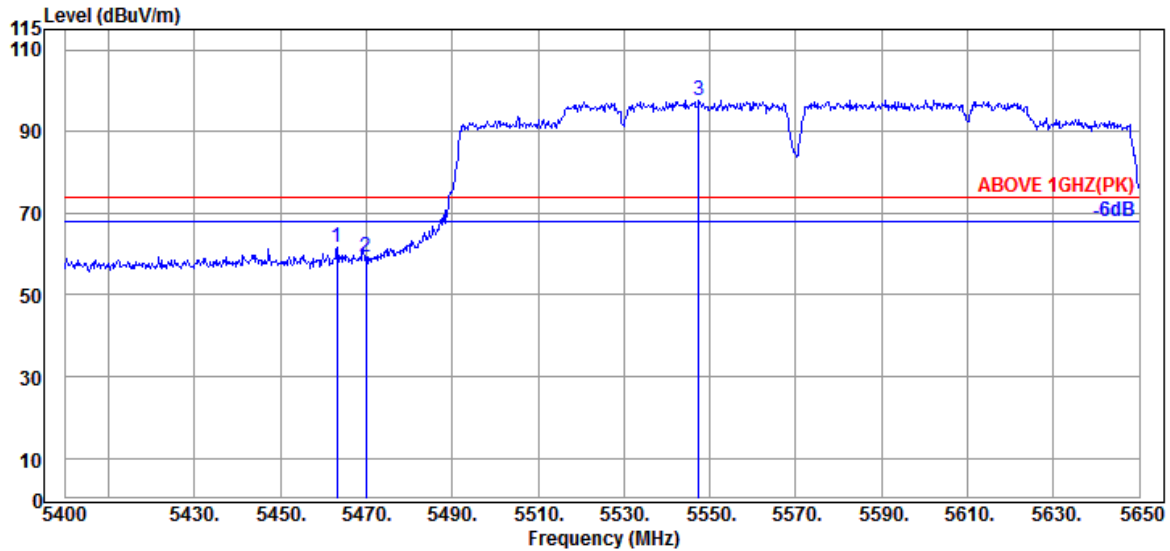

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	34.20	9.05	39.26	57.46	61.45	74.00	12.55	Peak
5470.000	34.17	9.06	39.26	55.35	59.32	74.00	14.68	Peak
@ 5547.500	34.00	9.10	39.27	93.89	97.72	---	---	Peak

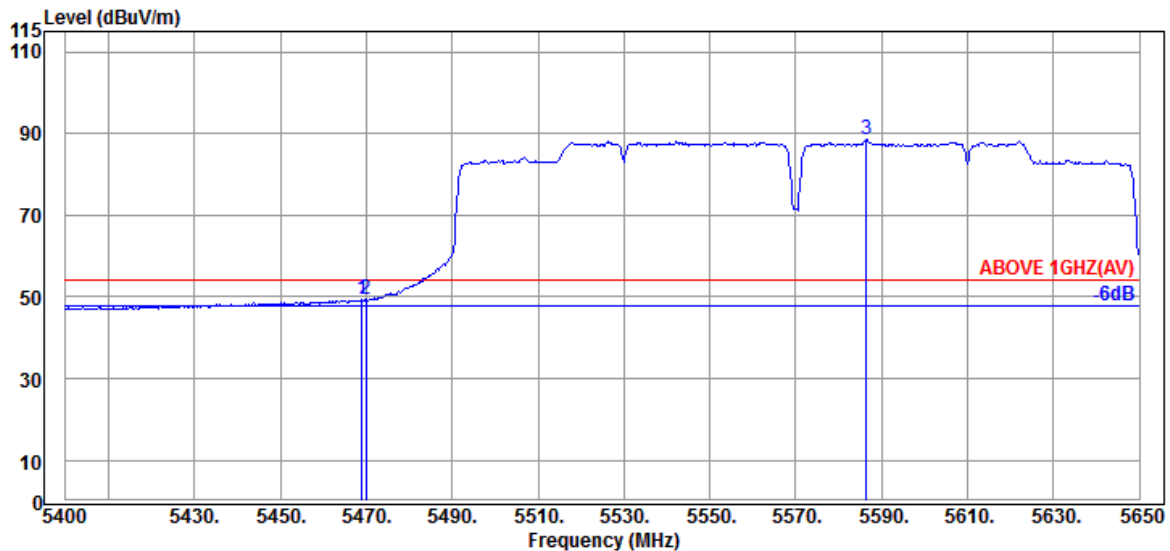


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	45.28	49.25	54.00	4.75	Average
5470.000	34.17	9.06	39.26	45.24	49.21	54.00	4.79	Average
@ 5586.500	34.00	9.12	39.28	84.66	88.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

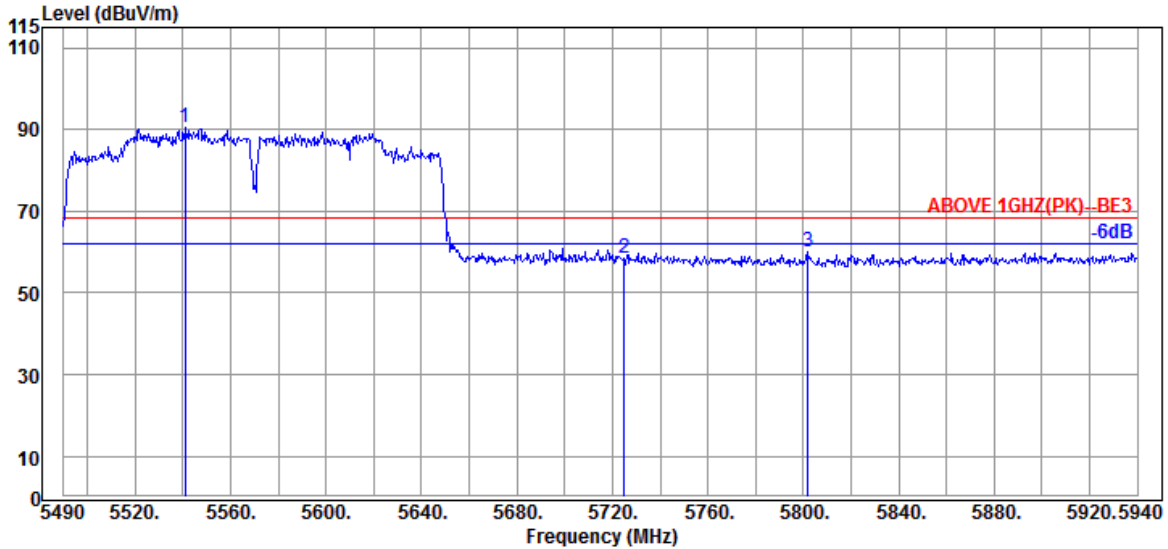

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5540.850	34.03	9.09	39.27	86.66	90.51	---	---	Peak
5724.900	33.90	9.20	39.30	54.74	58.54	68.20	9.66	Peak
5801.850	34.00	9.23	39.32	56.31	60.22	68.20	7.98	Peak

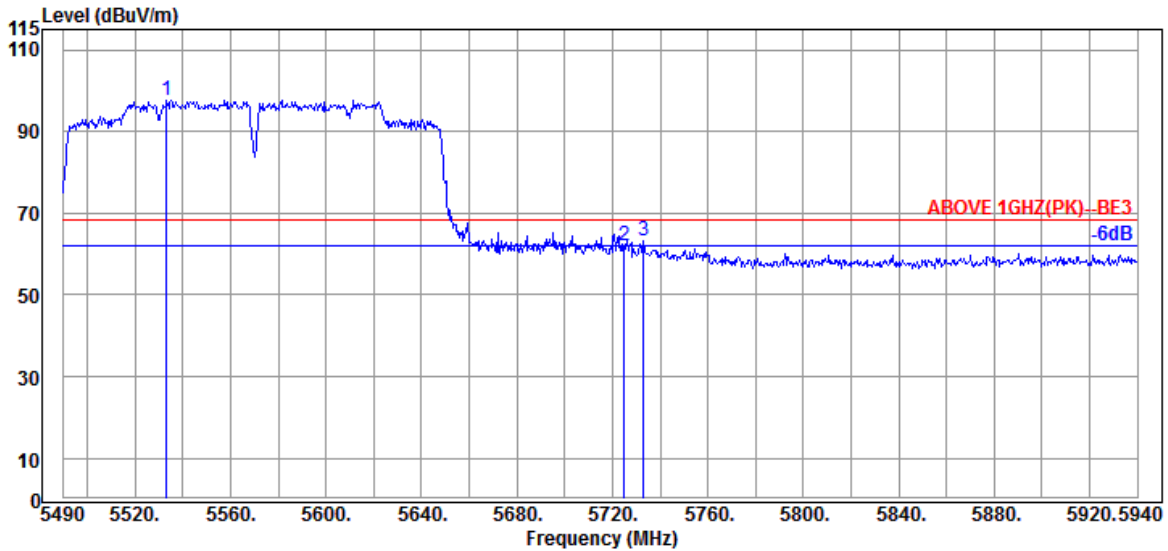


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5533.200	34.03	9.09	39.27	93.72	97.57	---	---	Peak
5724.900	33.90	9.20	39.30	58.28	62.08	68.20	6.12	Peak
5733.000	33.90	9.20	39.31	59.45	63.24	68.20	4.96	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

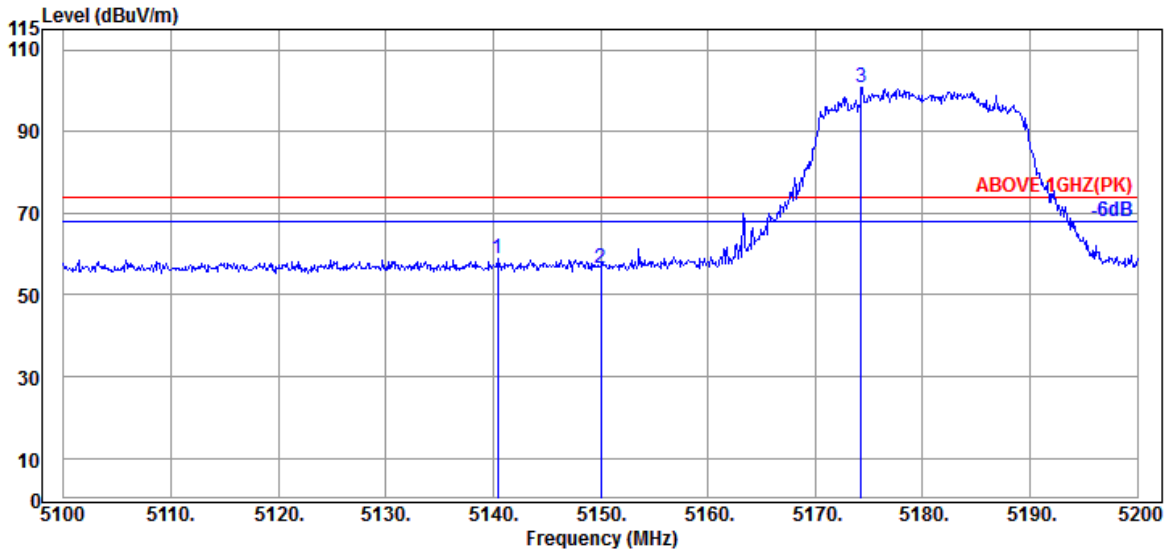

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.400	33.70	8.88	39.29	55.77	59.06	74.00	14.94	Peak
5150.000	33.70	8.88	39.29	53.38	56.67	74.00	17.33	Peak
@ 5174.300	33.83	8.90	39.28	97.29	100.74	---	---	Peak

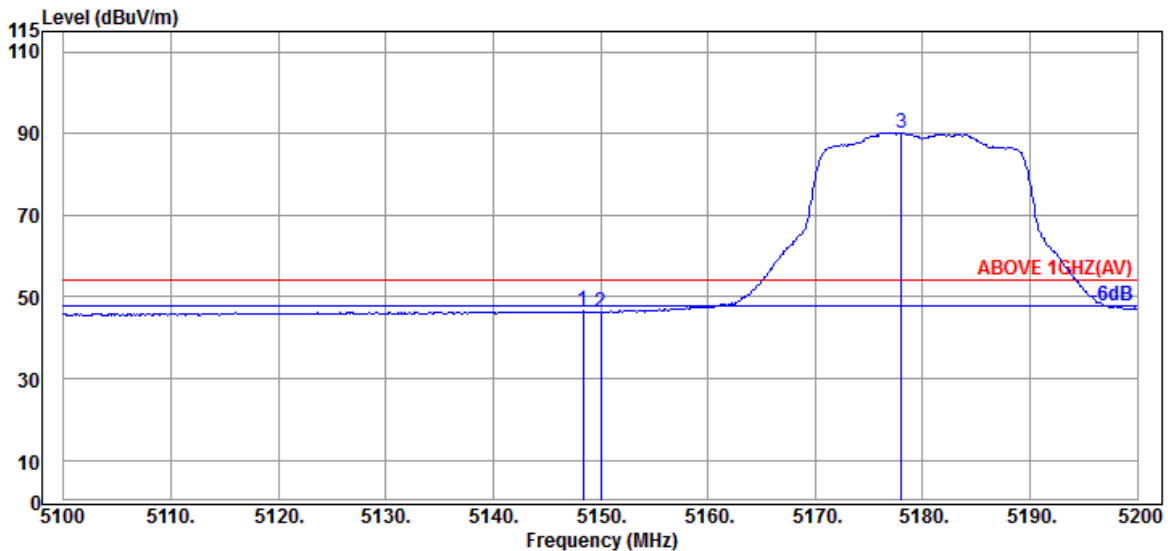


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.70	8.88	39.29	43.18	46.47	54.00	7.53	Average
5150.000	33.70	8.88	39.29	42.88	46.17	54.00	7.83	Average
@ 5178.000	33.83	8.90	39.28	86.73	90.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

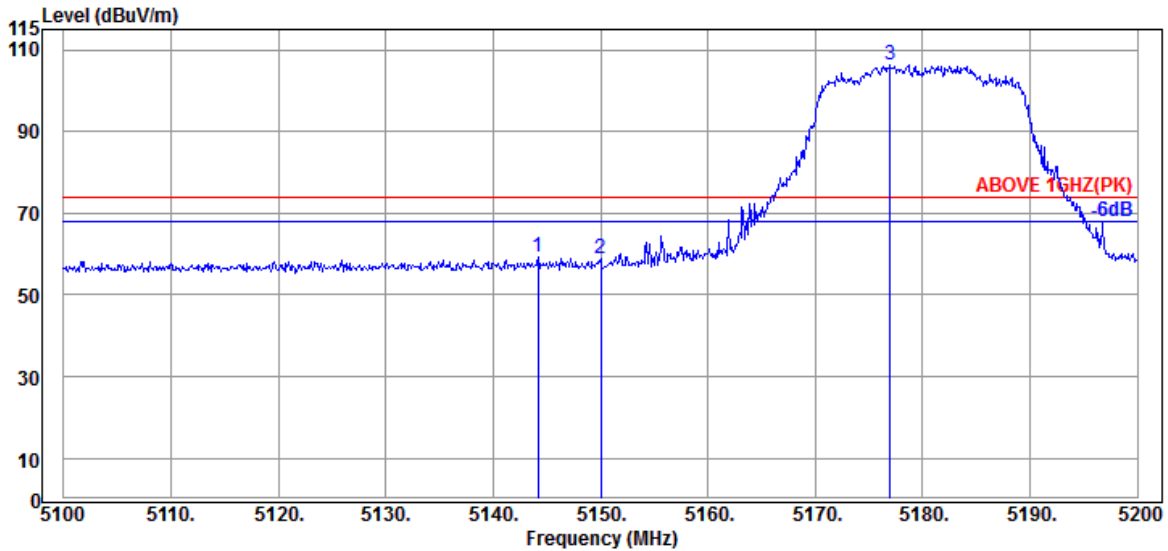

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	33.70	8.88	39.29	56.02	59.31	74.00	14.69	Peak
5150.000	33.70	8.88	39.29	55.61	58.90	74.00	15.10	Peak
@ 5177.000	33.83	8.90	39.28	102.84	106.29	---	---	Peak

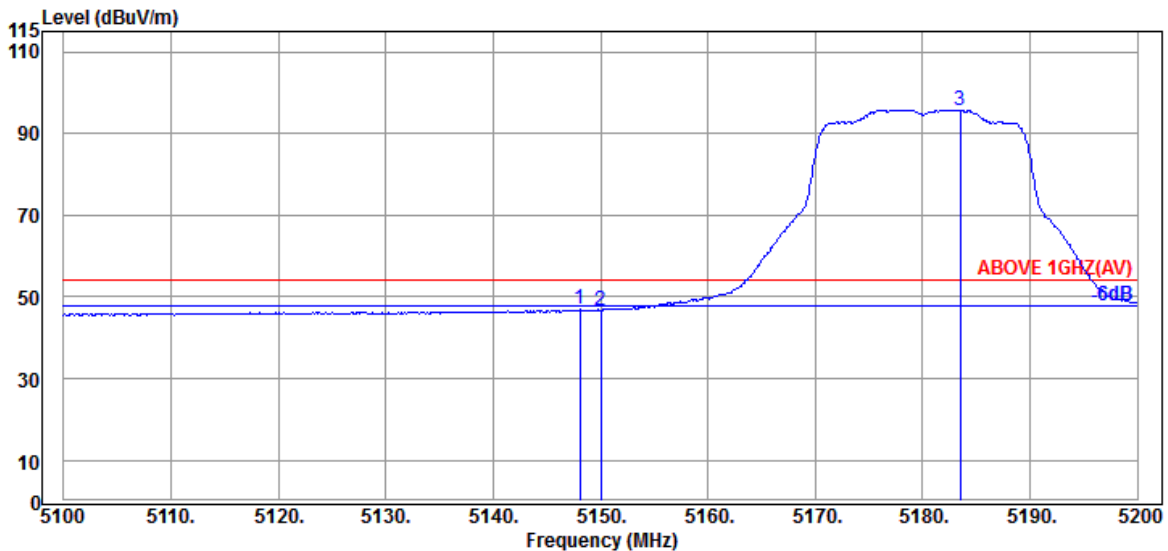


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.88	39.29	43.55	46.84	54.00	7.16	Average
5150.000	33.70	8.88	39.29	43.39	46.68	54.00	7.32	Average
@ 5183.500	33.83	8.90	39.28	92.37	95.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

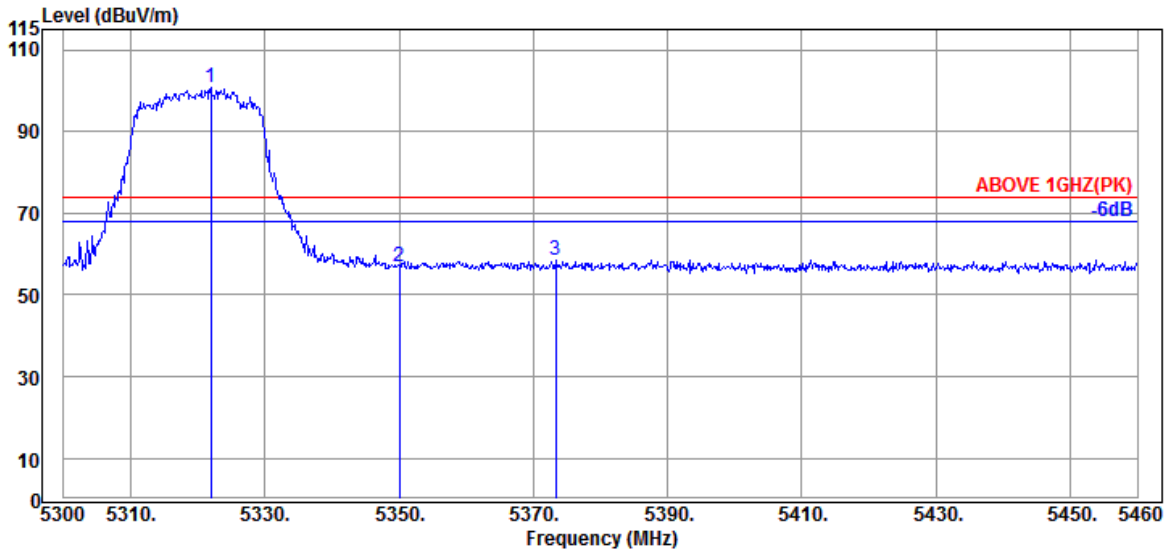

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	33.93	8.98	39.27	97.06	100.70	---	---	Peak
5350.080	34.00	8.99	39.27	53.18	56.90	74.00	17.10	Peak
5373.280	34.13	9.01	39.27	54.72	58.59	74.00	15.41	Peak

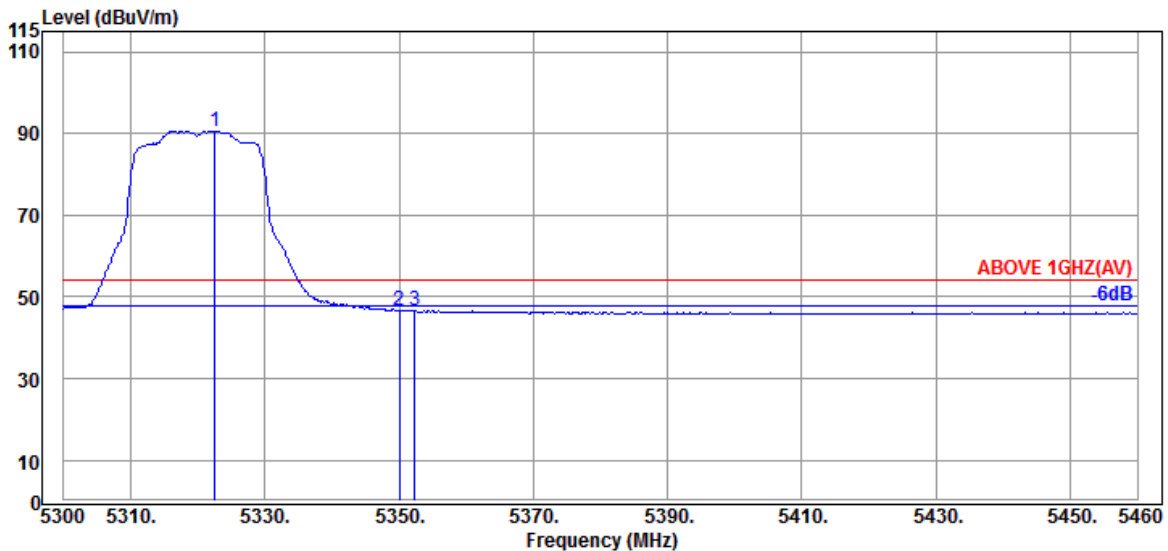


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.560	33.93	8.98	39.27	86.98	90.62	---	---	Average
5350.080	34.00	8.99	39.27	42.92	46.64	54.00	7.36	Average
5352.320	34.00	8.99	39.27	43.00	46.72	54.00	7.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

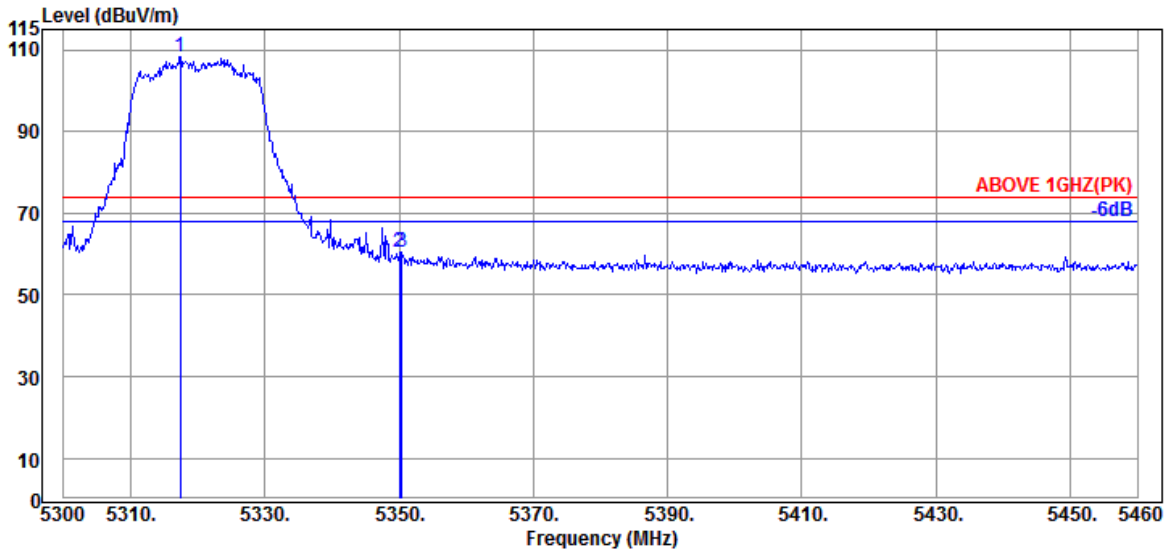

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	33.93	8.98	39.27	104.78	108.42	---	---	Peak
5350.080	34.00	8.99	39.27	56.93	60.65	74.00	13.35	Peak
5350.400	34.00	8.99	39.27	56.68	60.40	74.00	13.60	Peak

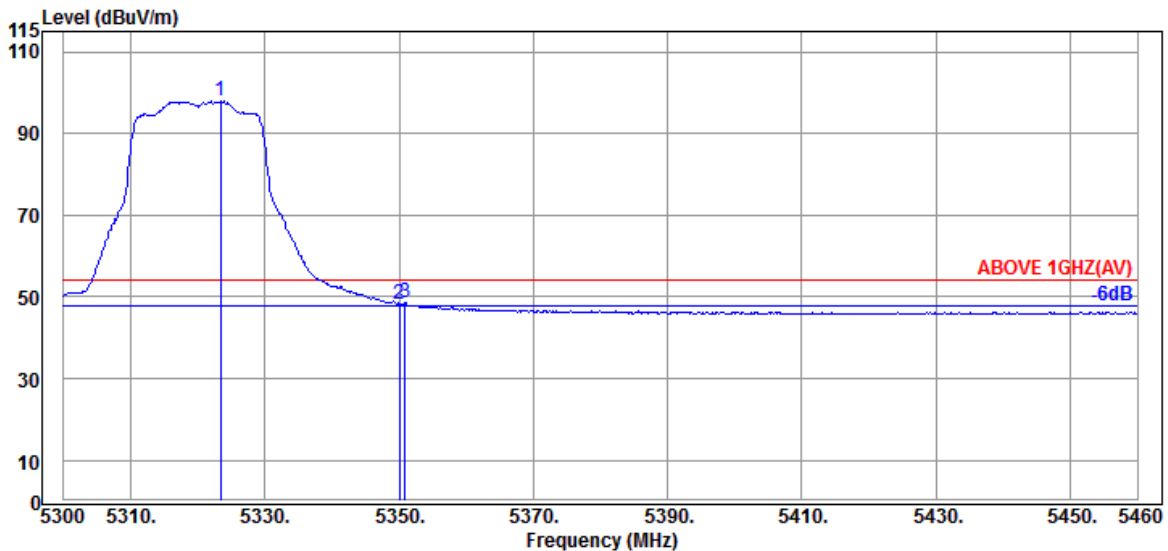


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	33.97	8.99	39.27	94.18	97.87	---	---	Average
5350.080	34.00	8.99	39.27	44.40	48.12	54.00	5.88	Average
5350.880	34.00	8.99	39.27	44.74	48.46	54.00	5.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

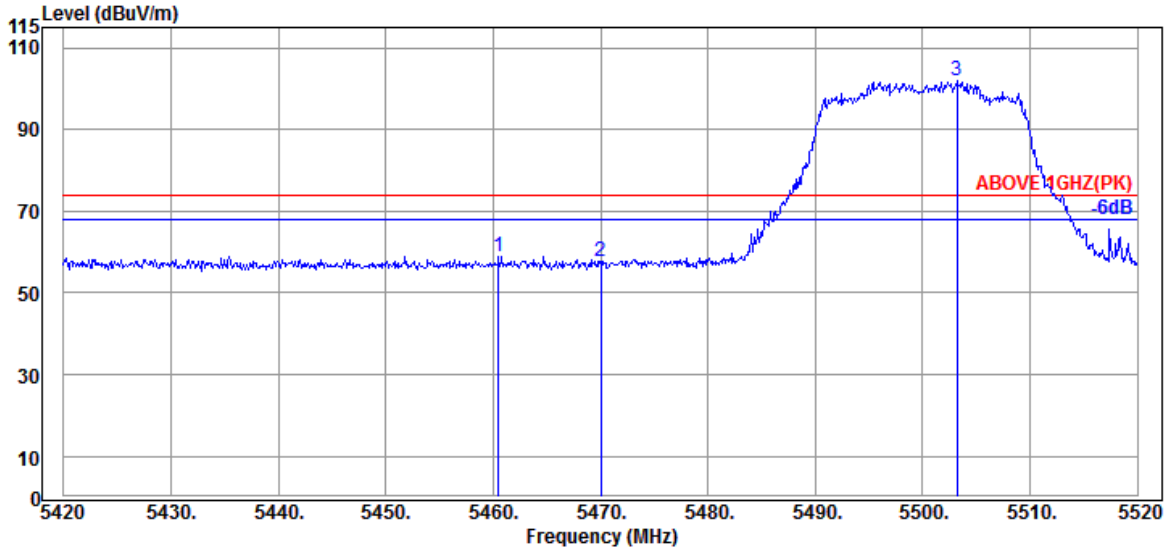

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.20	9.05	39.26	54.98	58.97	74.00	15.03	Peak
5470.000	34.17	9.06	39.26	53.87	57.84	74.00	16.16	Peak
@ 5503.200	34.10	9.08	39.26	98.17	102.09	---	---	Peak

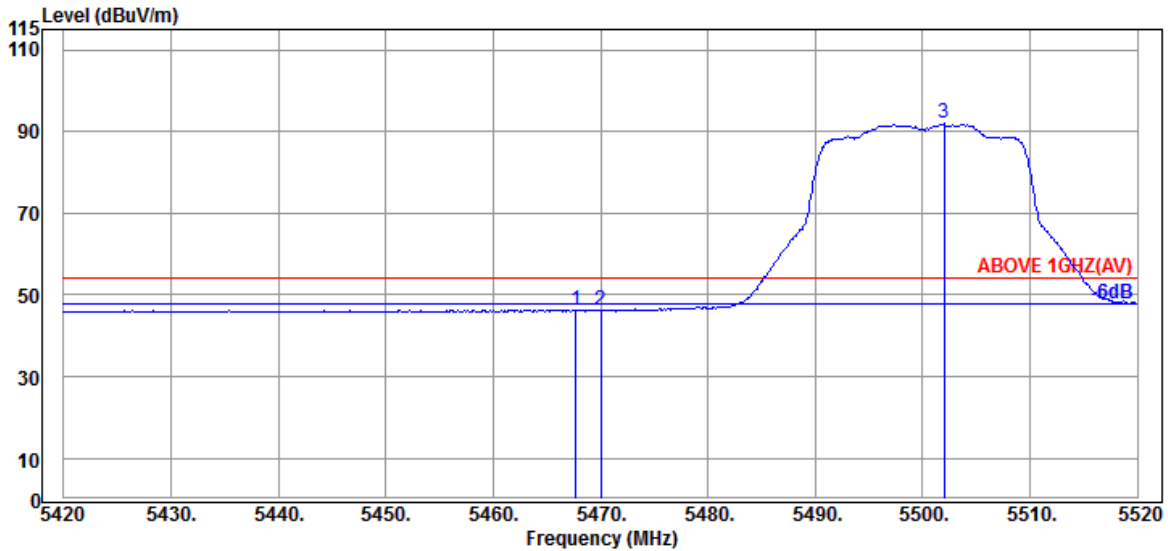


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.17	9.06	39.26	42.41	46.38	54.00	7.62	Average
5470.000	34.17	9.06	39.26	42.13	46.10	54.00	7.90	Average
@ 5502.000	34.10	9.08	39.26	88.01	91.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

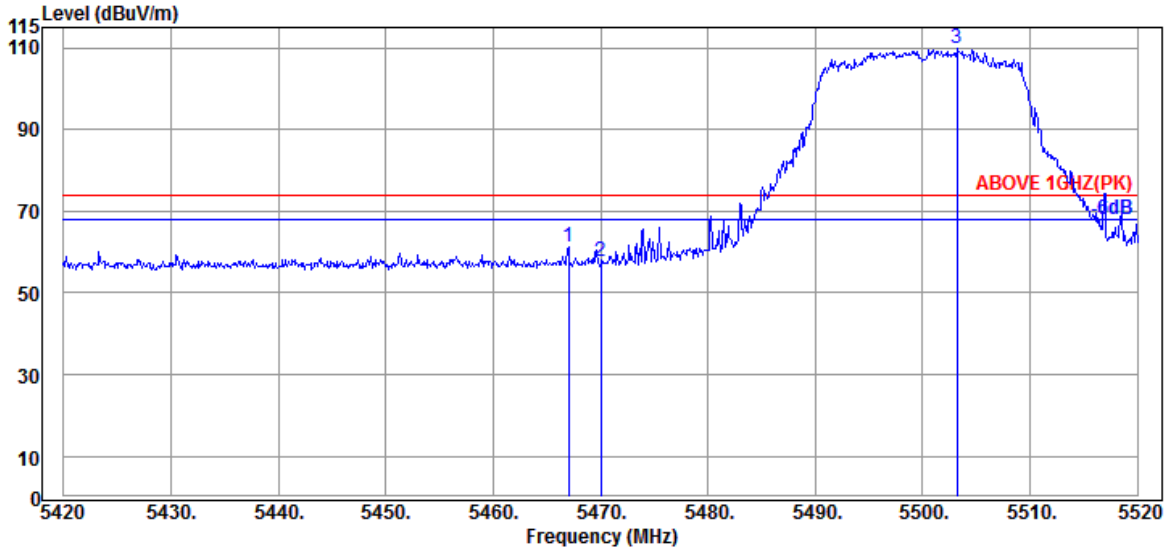

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.17	9.06	39.26	57.47	61.44	74.00	12.56	Peak
5470.000	34.17	9.06	39.26	53.76	57.73	74.00	16.27	Peak
@ 5503.200	34.10	9.08	39.26	106.06	109.98	---	---	Peak

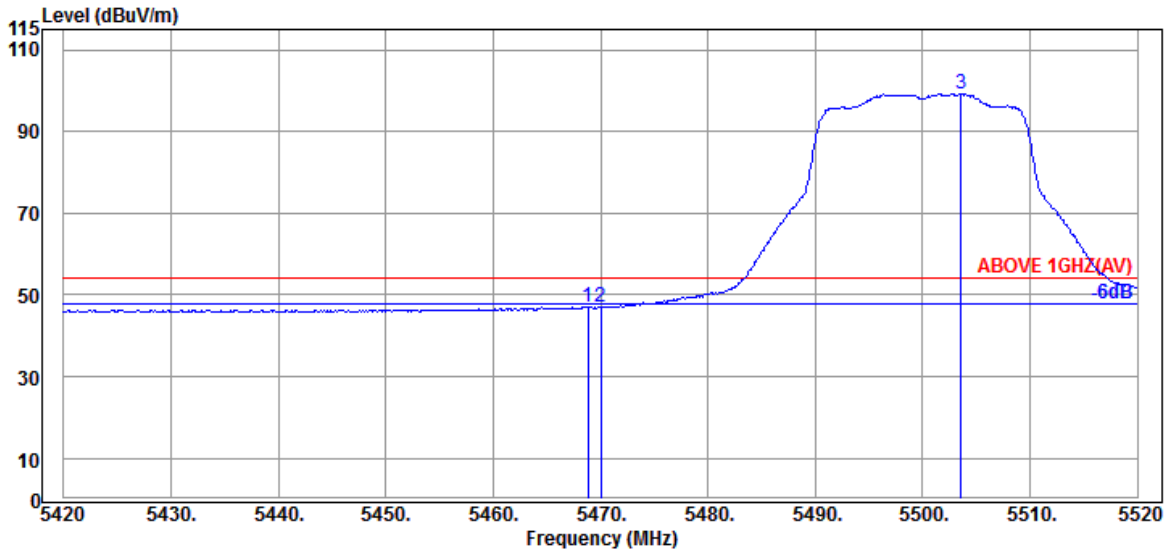


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.17	9.06	39.26	43.04	47.01	54.00	6.99	Average
5470.000	34.17	9.06	39.26	43.00	46.97	54.00	7.03	Average
@ 5503.600	34.10	9.08	39.26	95.30	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

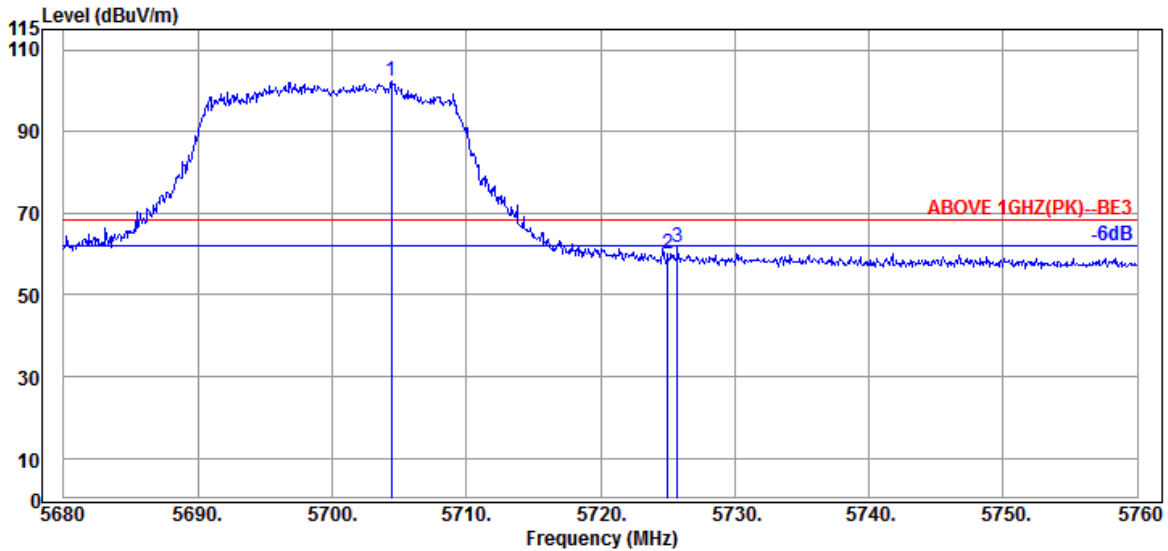

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.400	33.90	9.18	39.30	98.45	102.23	---	---	Peak
5725.040	33.90	9.20	39.30	56.07	59.87	68.20	8.33	Peak
5725.760	33.90	9.20	39.30	57.81	61.61	68.20	6.59	Peak

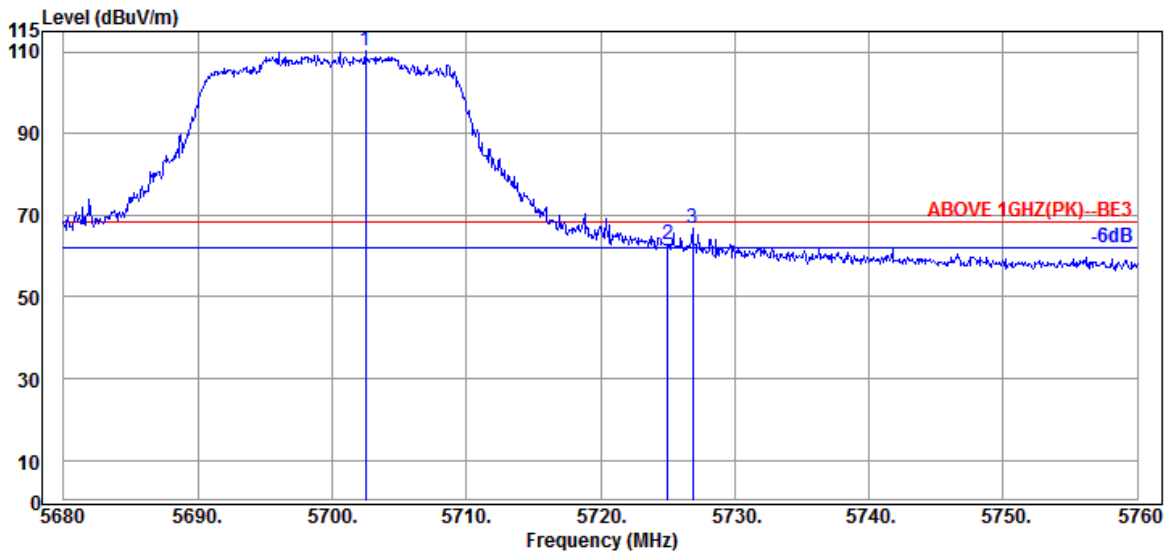


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.480	33.90	9.18	39.30	106.35	110.13	---	---	Peak
5725.040	33.90	9.20	39.30	58.99	62.79	68.20	5.41	Peak
5726.880	33.90	9.20	39.31	62.89	66.68	68.20	1.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

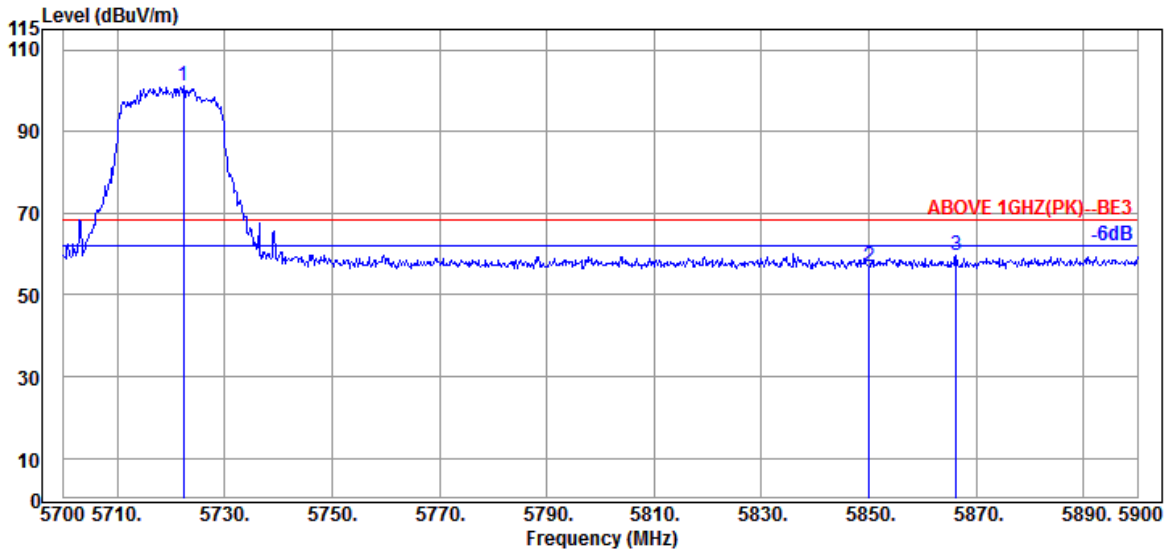

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	33.90	9.20	39.30	97.46	101.26	---	---	Peak
5850.000	34.00	9.25	39.33	52.93	56.85	68.20	11.35	Peak
5866.200	34.03	9.26	39.33	55.63	59.59	68.20	8.61	Peak

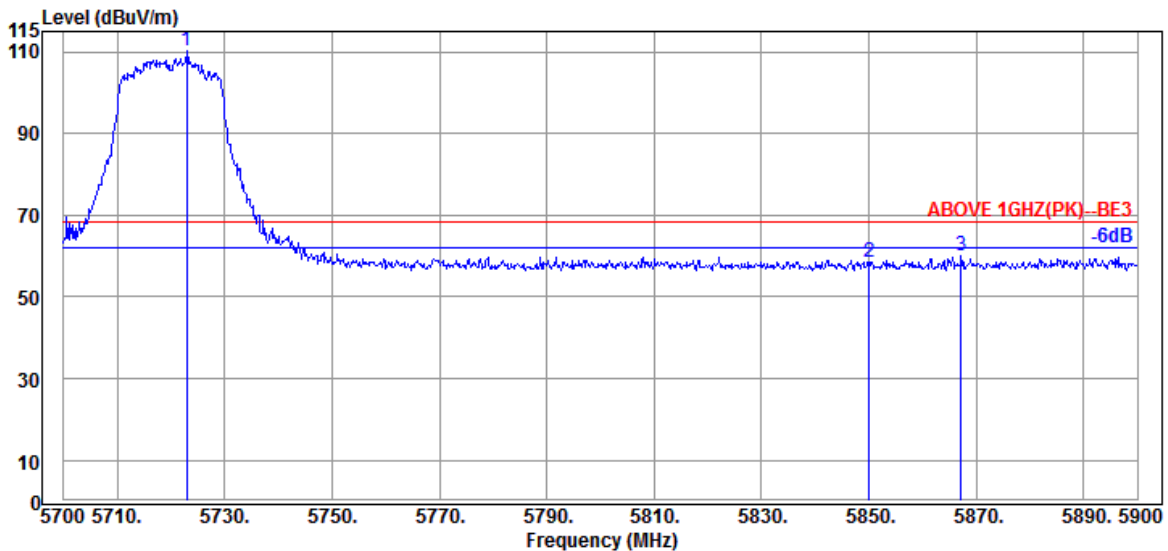


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.000	33.90	9.20	39.30	106.38	110.18	---	---	Peak
5850.000	34.00	9.25	39.33	54.59	58.51	68.20	9.69	Peak
5867.200	34.03	9.26	39.33	56.26	60.22	68.20	7.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

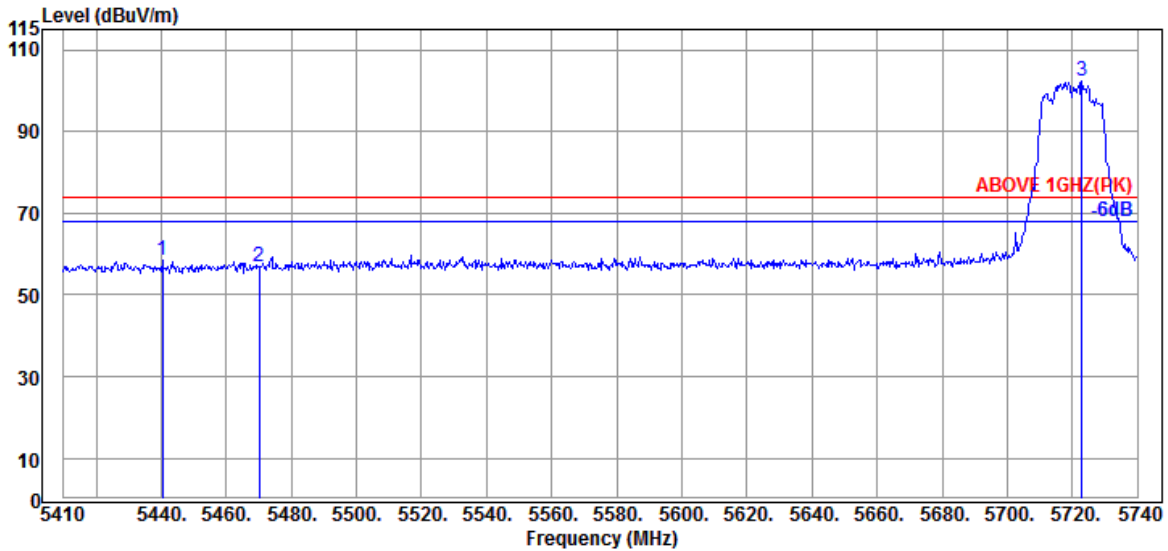

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.360	34.20	9.04	39.26	54.56	58.54	74.00	15.46	Peak
5470.060	34.17	9.06	39.26	52.82	56.79	74.00	17.21	Peak
@ 5722.840	33.90	9.20	39.30	98.54	102.34	---	---	Peak

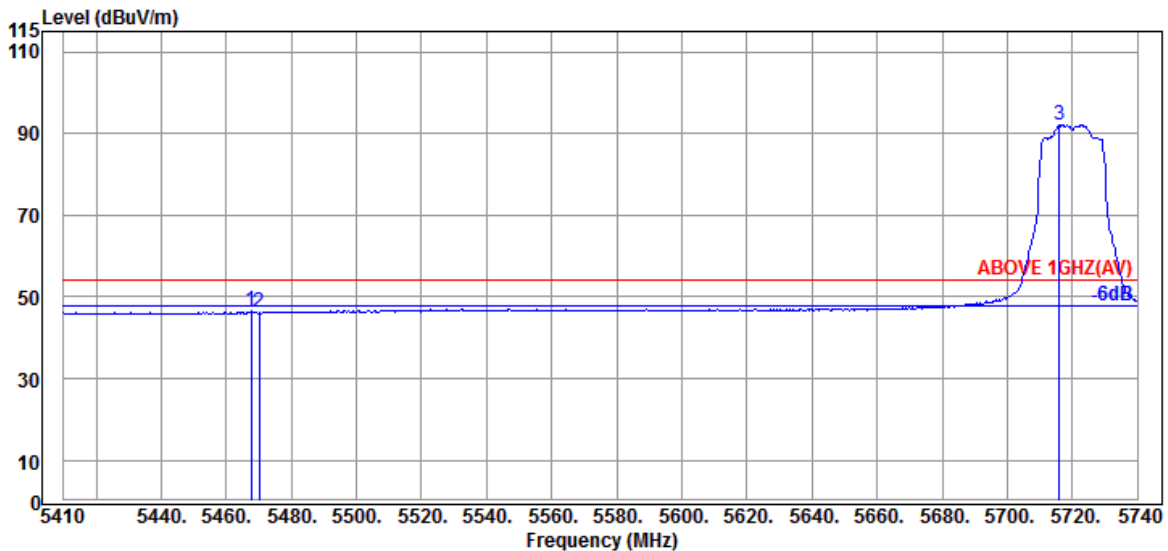


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.17	9.06	39.26	42.51	46.48	54.00	7.52	Average
5470.060	34.17	9.06	39.26	42.11	46.08	54.00	7.92	Average
@ 5715.910	33.90	9.19	39.30	88.25	92.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

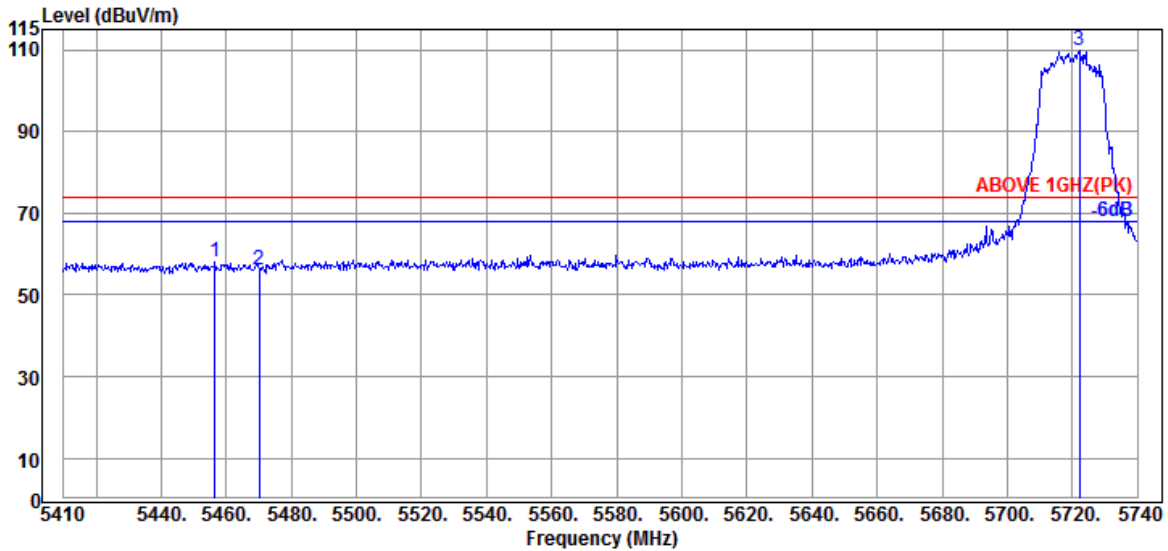

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.530	34.20	9.05	39.26	54.05	58.04	74.00	15.96	Peak
5470.060	34.17	9.06	39.26	52.26	56.23	74.00	17.77	Peak
@ 5722.180	33.90	9.20	39.30	106.03	109.83	---	---	Peak

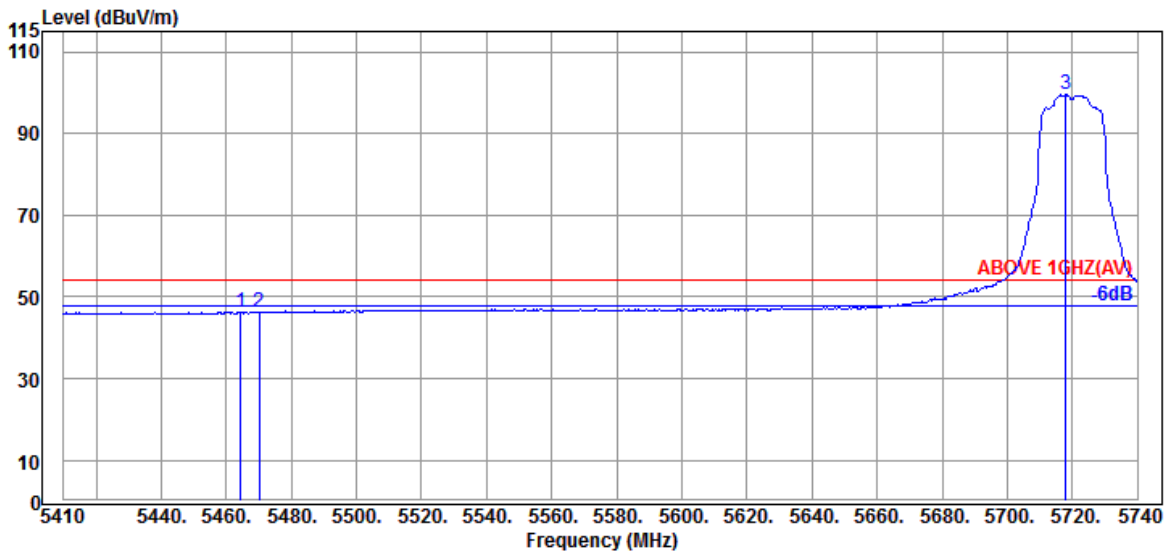


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.17	9.06	39.26	42.37	46.34	54.00	7.66	Average
5470.060	34.17	9.06	39.26	42.20	46.17	54.00	7.83	Average
@ 5717.890	33.90	9.19	39.30	95.81	99.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

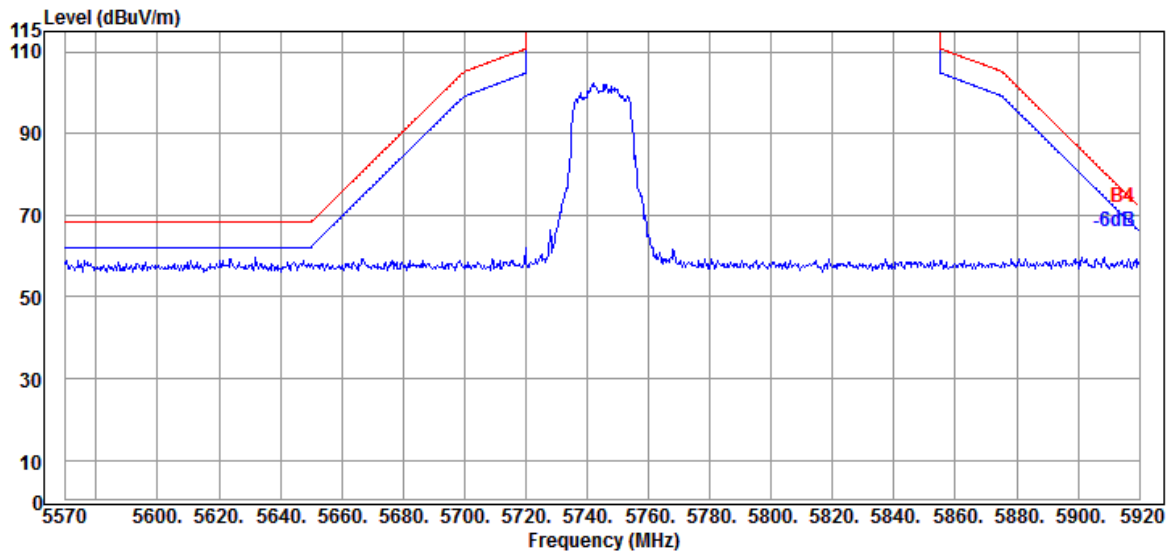


Antenna at Vertical Polarization

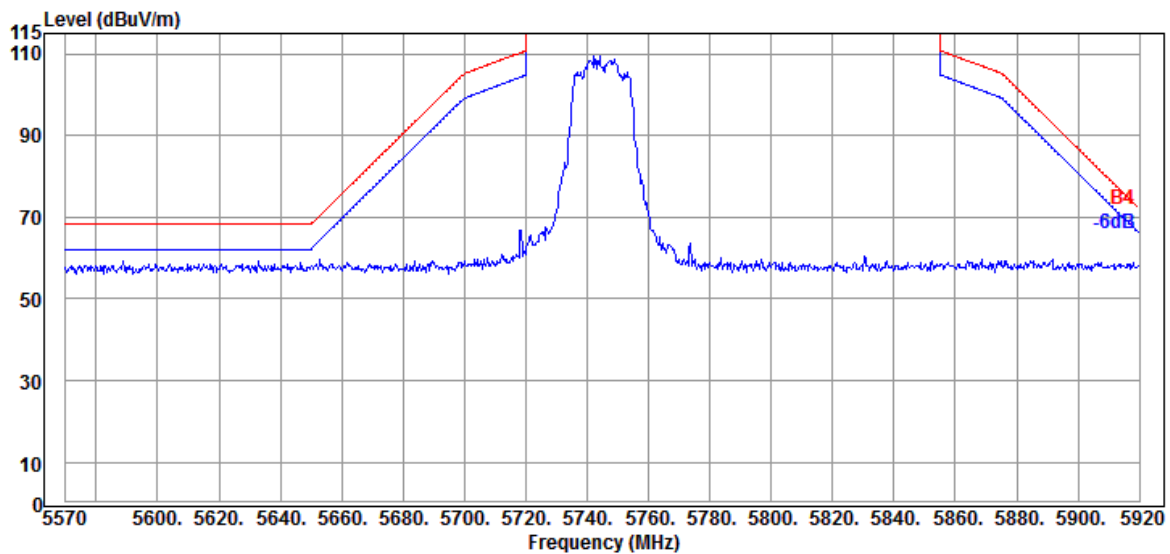


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

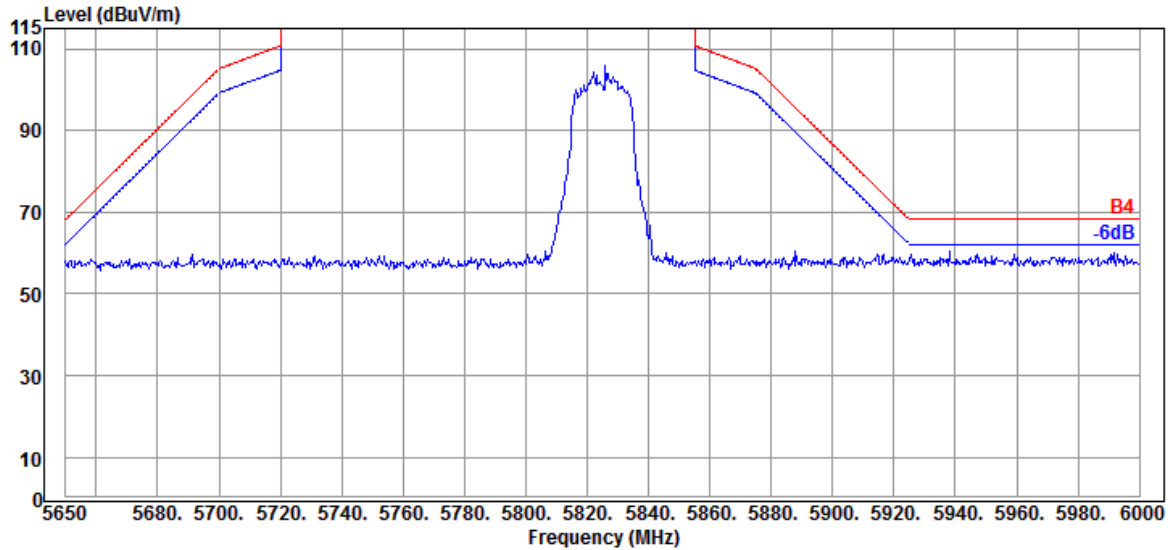

Antenna at Vertical Polarization

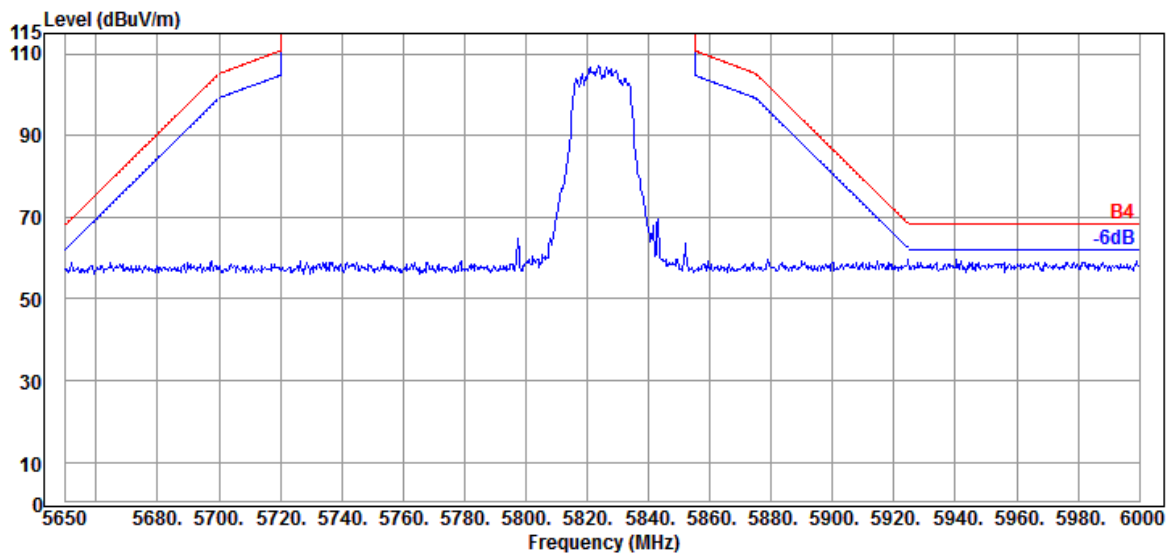


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

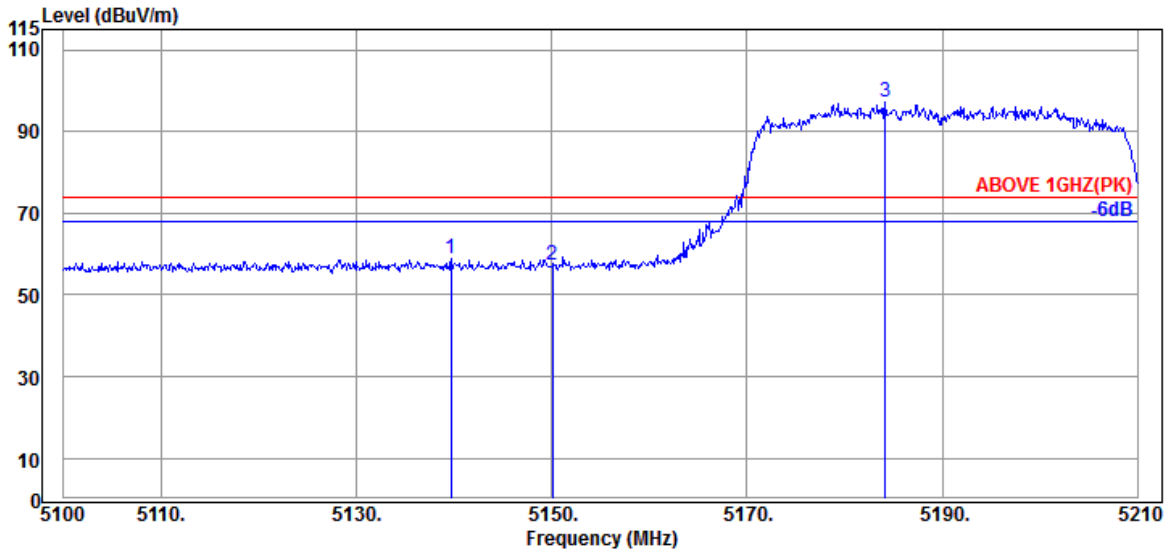

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.710	33.70	8.88	39.29	55.54	58.83	74.00	15.17	Peak
5150.050	33.70	8.88	39.29	54.17	57.46	74.00	16.54	Peak
@ 5184.150	33.83	8.90	39.28	93.74	97.19	---	---	Peak

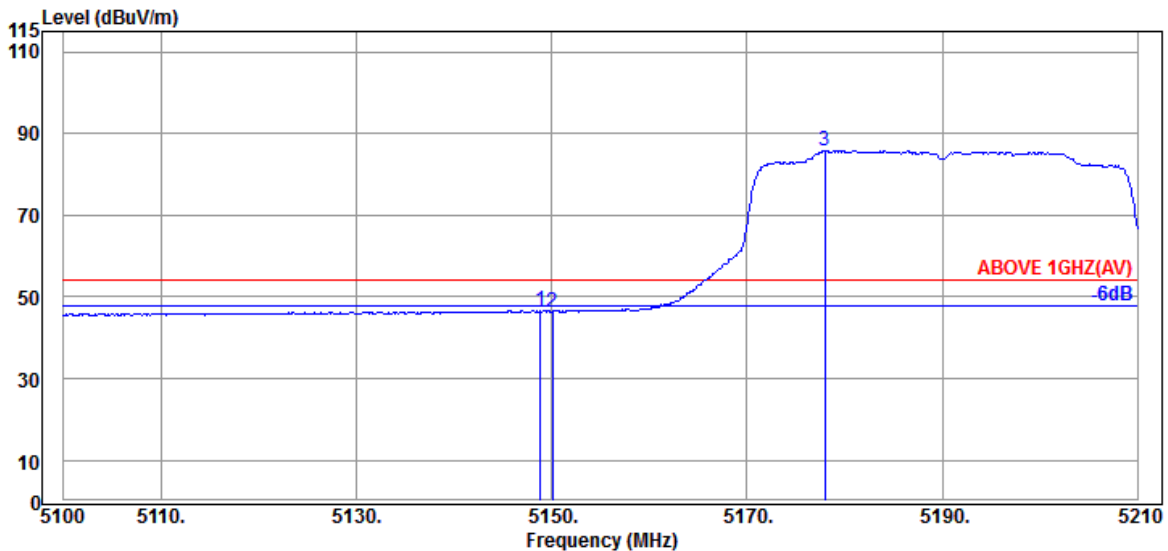


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	33.70	8.88	39.29	43.27	46.56	54.00	7.44	Average
5150.050	33.70	8.88	39.29	43.10	46.39	54.00	7.61	Average
@ 5177.990	33.83	8.90	39.28	82.44	85.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

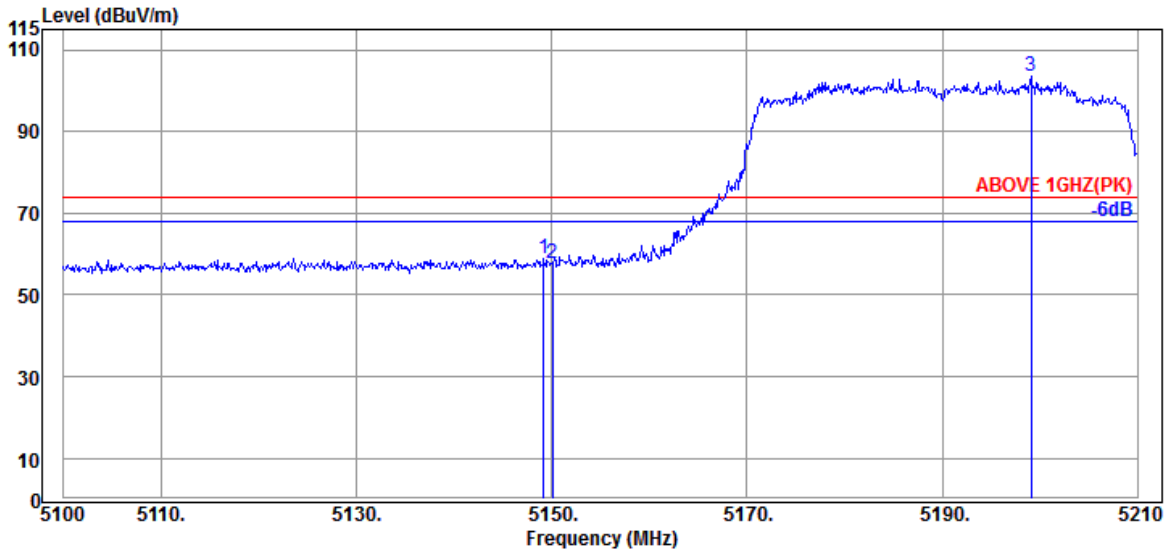

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.70	8.88	39.29	55.68	58.97	74.00	15.03	Peak
5150.050	33.70	8.88	39.29	54.50	57.79	74.00	16.21	Peak
@ 5199.110	33.90	8.91	39.28	99.89	103.42	---	---	Peak

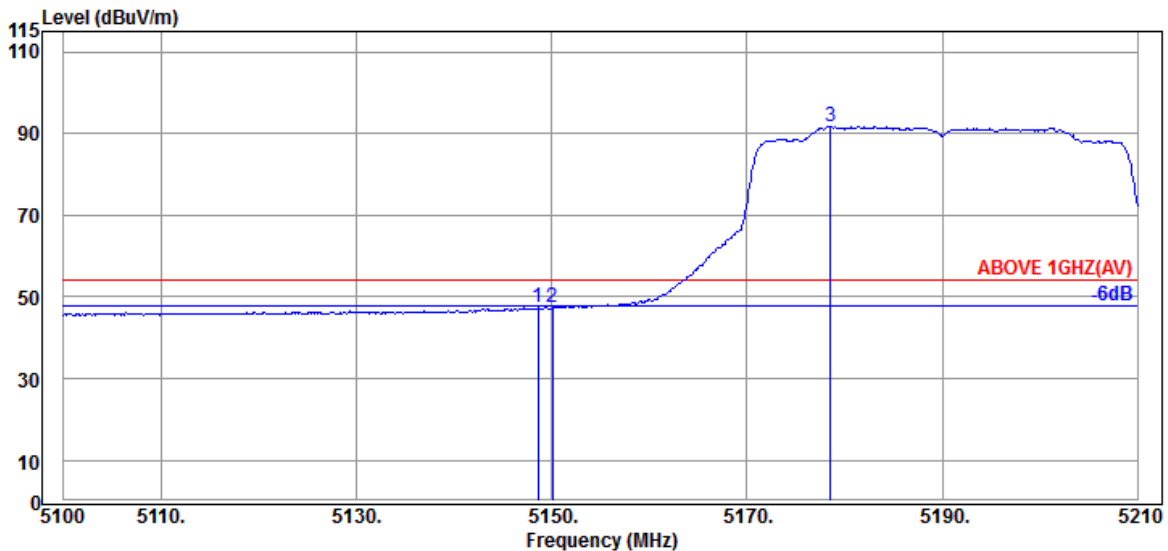


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	33.70	8.88	39.29	44.01	47.30	54.00	6.70	Average
5150.050	33.70	8.88	39.29	43.96	47.25	54.00	6.75	Average
@ 5178.540	33.83	8.90	39.28	88.40	91.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

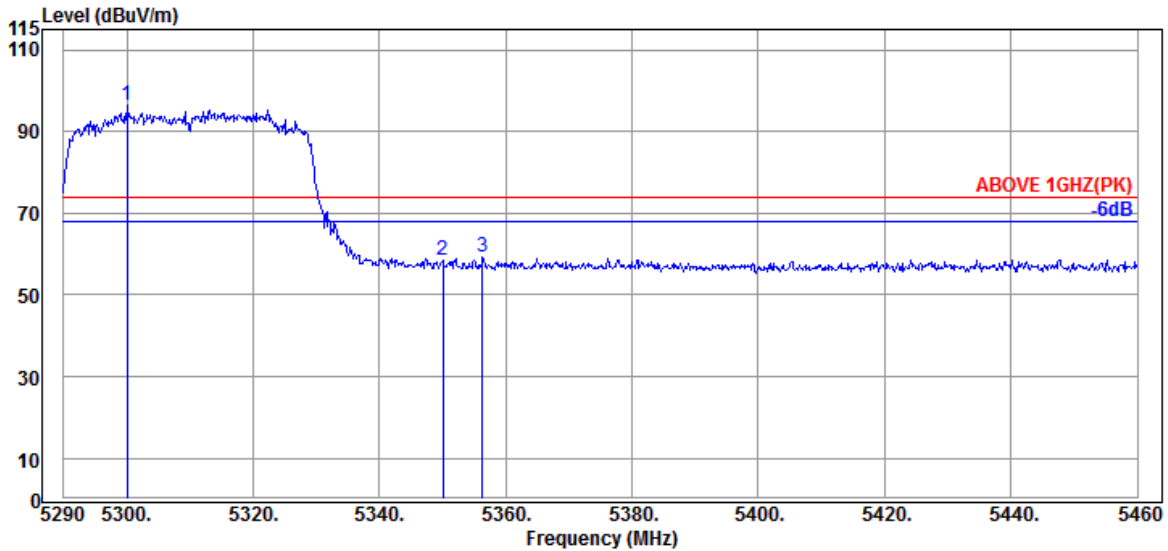

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.030	33.90	8.97	39.28	92.81	96.40	---	---	Peak
5350.010	34.00	8.99	39.27	54.73	58.45	74.00	15.55	Peak
5356.300	34.07	9.00	39.27	55.33	59.13	74.00	14.87	Peak

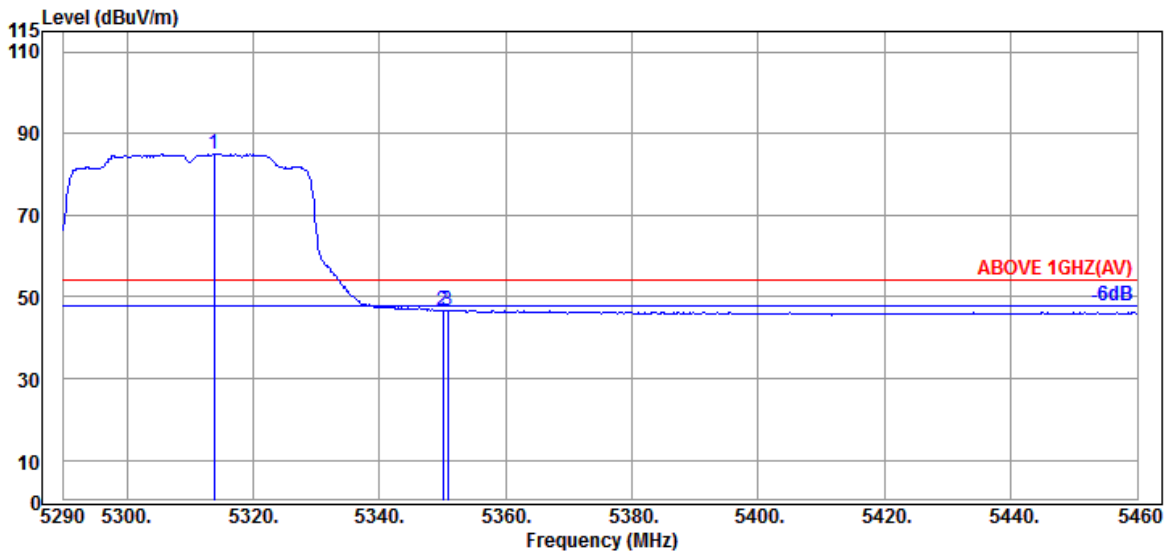


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.800	33.93	8.98	39.27	81.33	84.97	---	---	Average
5350.010	34.00	8.99	39.27	42.98	46.70	54.00	7.30	Average
5350.860	34.00	8.99	39.27	43.04	46.76	54.00	7.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

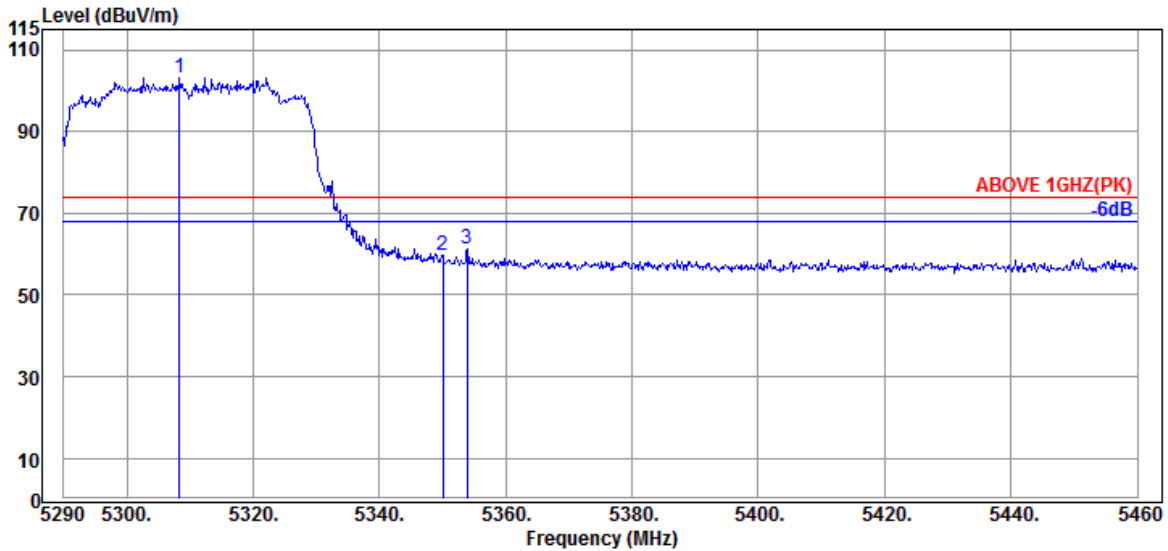

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.360	33.93	8.98	39.28	99.53	103.16	---	---	Peak
5350.010	34.00	8.99	39.27	56.08	59.80	74.00	14.20	Peak
5353.920	34.00	8.99	39.27	57.35	61.07	74.00	12.93	Peak

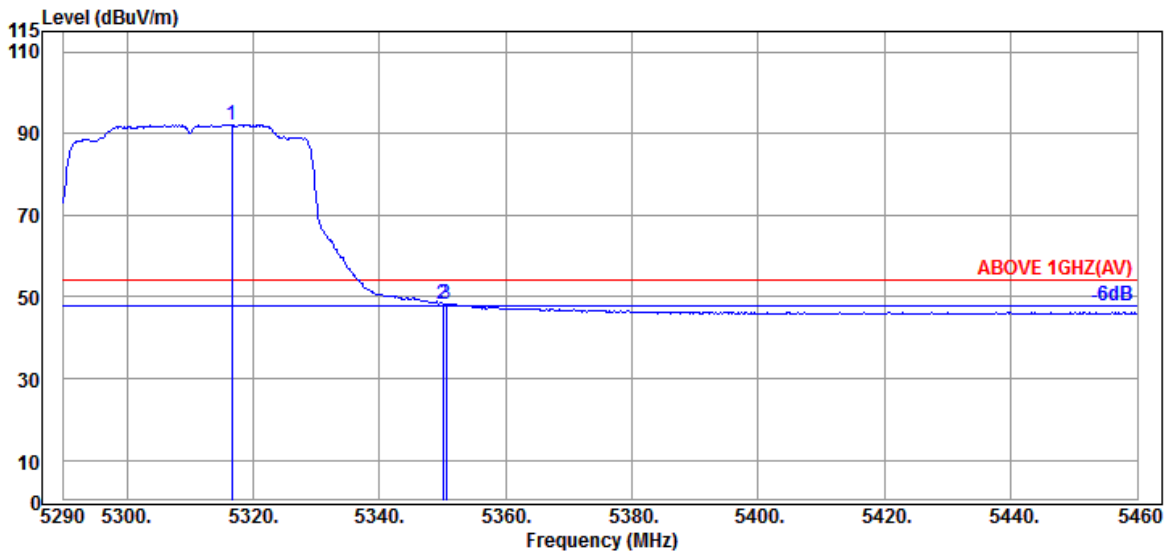


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.690	33.93	8.98	39.27	88.61	92.25	---	---	Average
5350.010	34.00	8.99	39.27	44.60	48.32	54.00	5.68	Average
5350.520	34.00	8.99	39.27	44.60	48.32	54.00	5.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

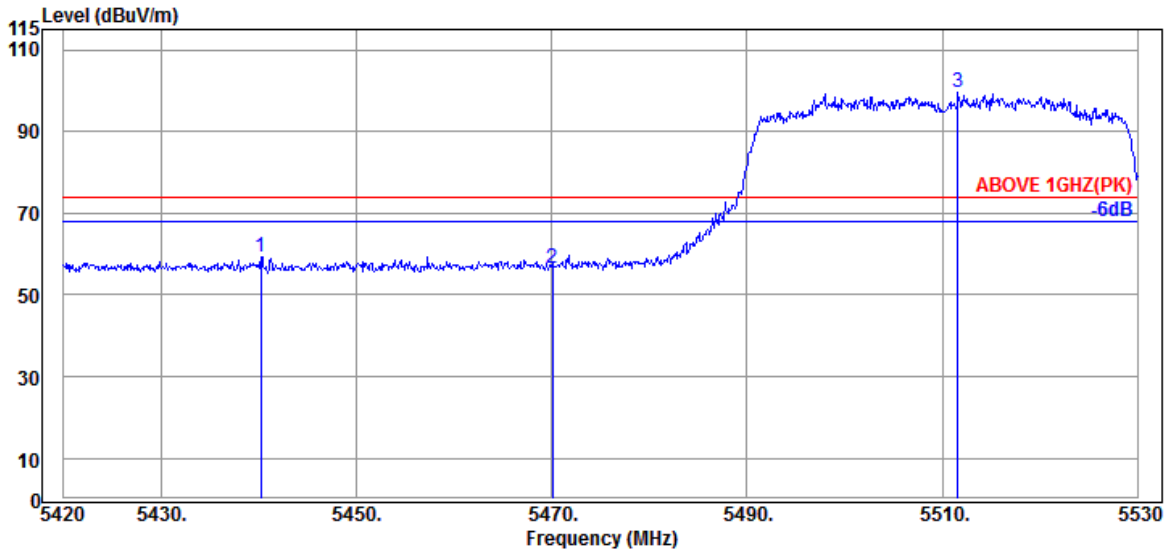

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.240	34.20	9.04	39.26	55.41	59.39	74.00	14.61	Peak
5470.050	34.17	9.06	39.26	52.63	56.60	74.00	17.40	Peak
@ 5511.630	34.07	9.09	39.26	95.73	99.63	---	---	Peak

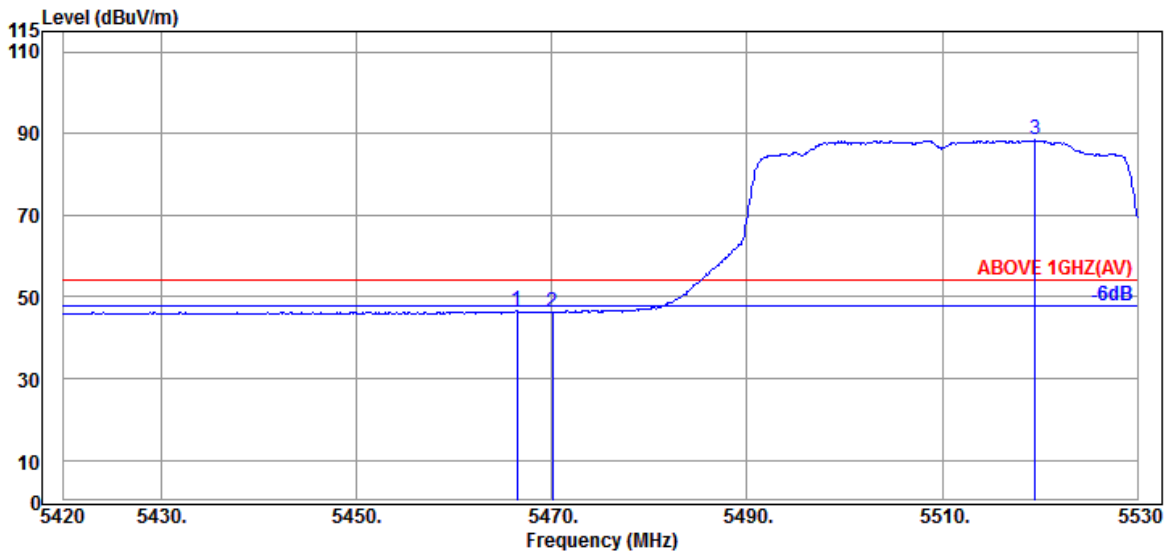


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.420	34.17	9.06	39.26	42.53	46.50	54.00	7.50	Average
5470.050	34.17	9.06	39.26	42.25	46.22	54.00	7.78	Average
@ 5519.550	34.07	9.09	39.26	84.50	88.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

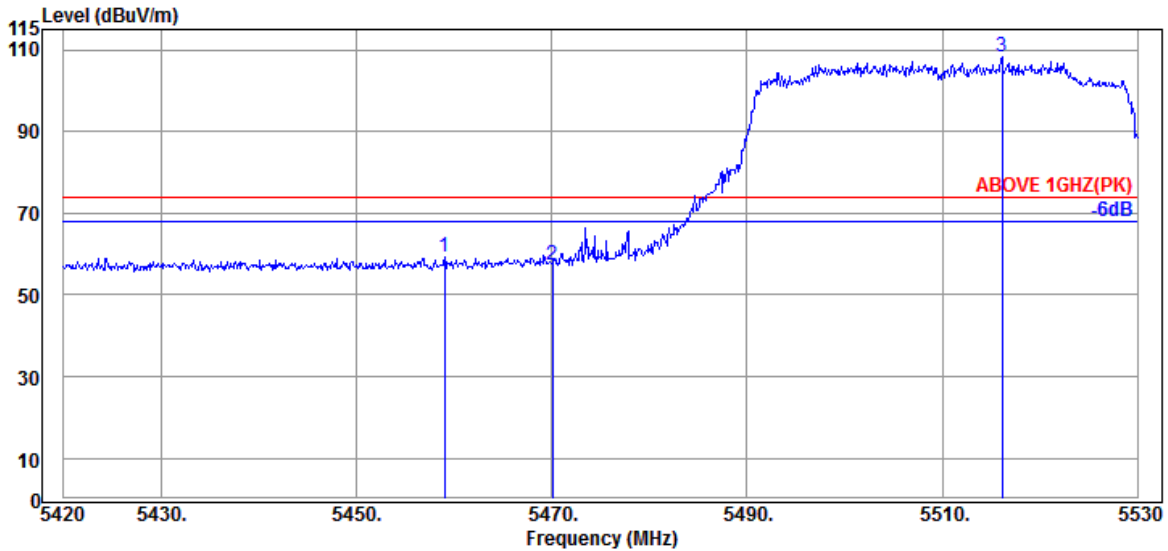

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.050	34.20	9.05	39.26	55.21	59.20	74.00	14.80	Peak
5470.050	34.17	9.06	39.26	53.25	57.22	74.00	16.78	Peak
@ 5516.140	34.07	9.09	39.26	104.19	108.09	---	---	Peak

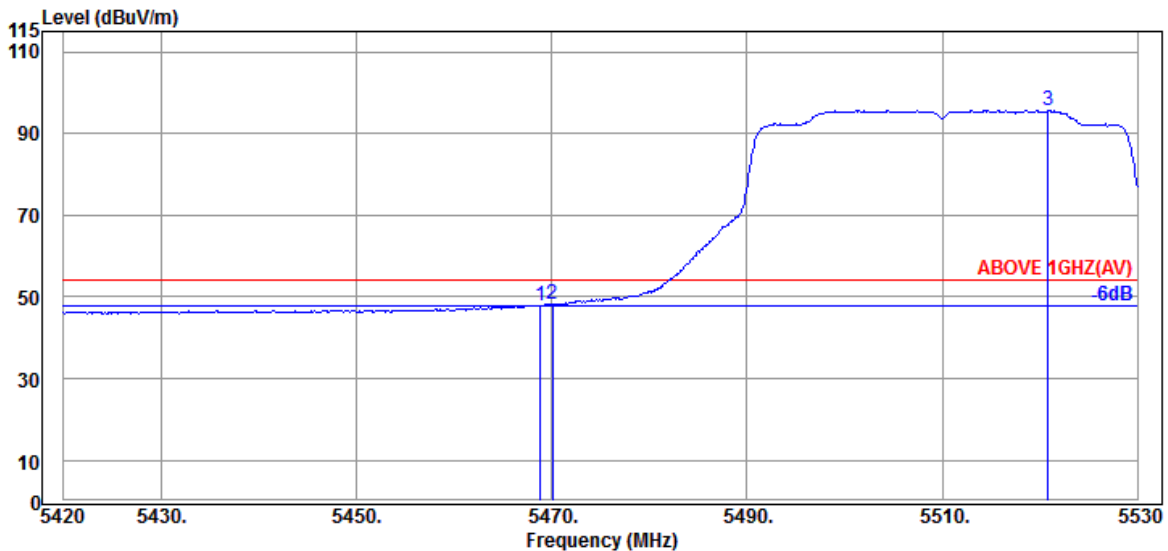


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.17	9.06	39.26	43.91	47.88	54.00	6.12	Average
5470.050	34.17	9.06	39.26	44.31	48.28	54.00	5.72	Average
@ 5520.870	34.07	9.09	39.26	91.78	95.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

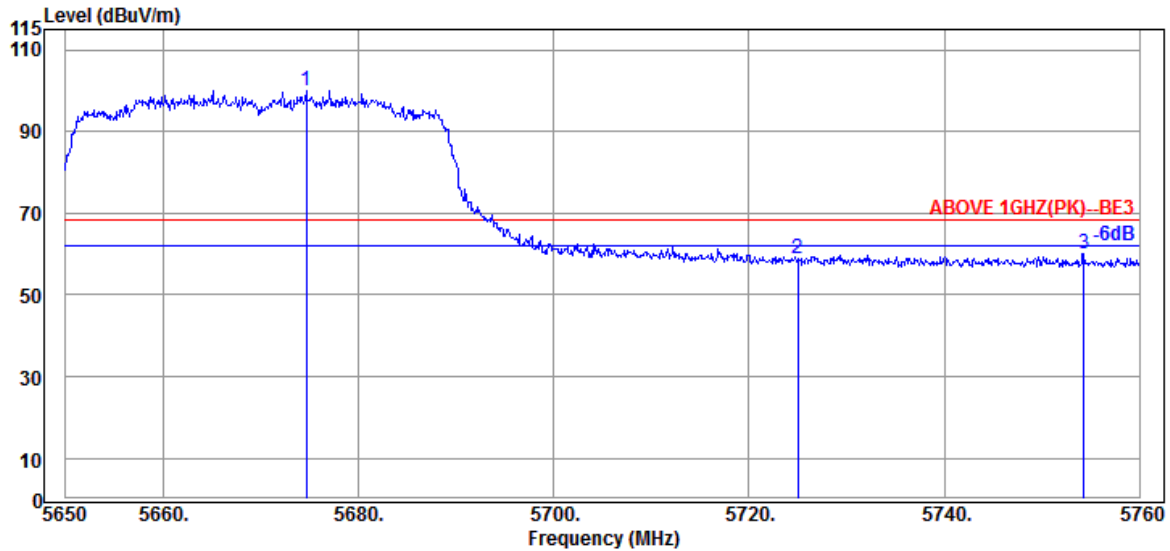

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.640	33.90	9.17	39.30	96.23	100.00	---	---	Peak
5725.020	33.90	9.20	39.30	55.11	58.91	68.20	9.29	Peak
5754.280	33.90	9.20	39.31	56.30	60.09	68.20	8.11	Peak

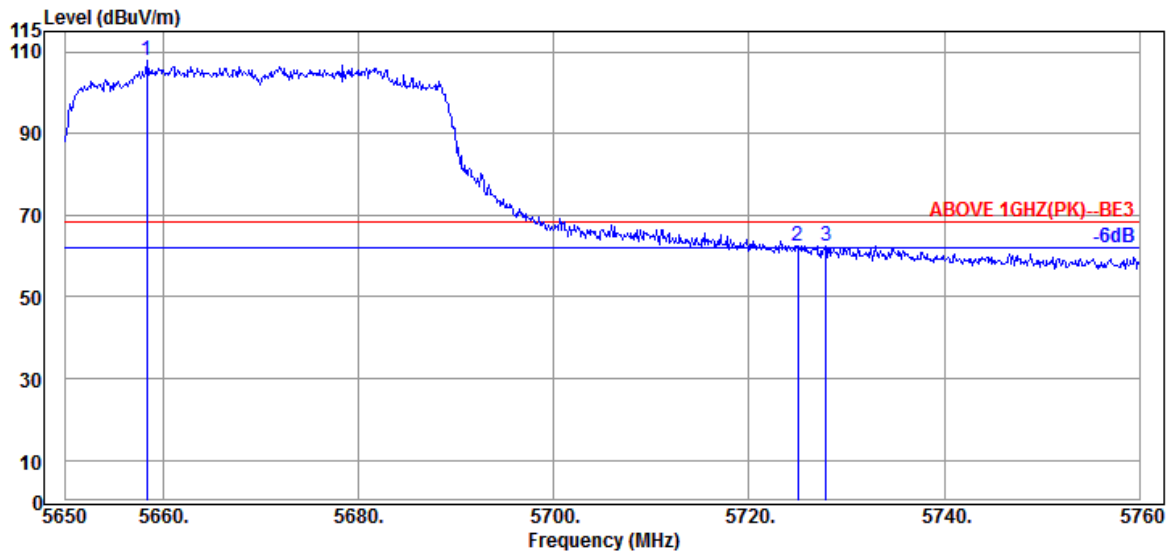


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5658.360	33.90	9.16	39.29	103.97	107.74	---	---	Peak
5725.020	33.90	9.20	39.30	58.80	62.60	68.20	5.60	Peak
5727.880	33.90	9.20	39.31	58.79	62.58	68.20	5.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

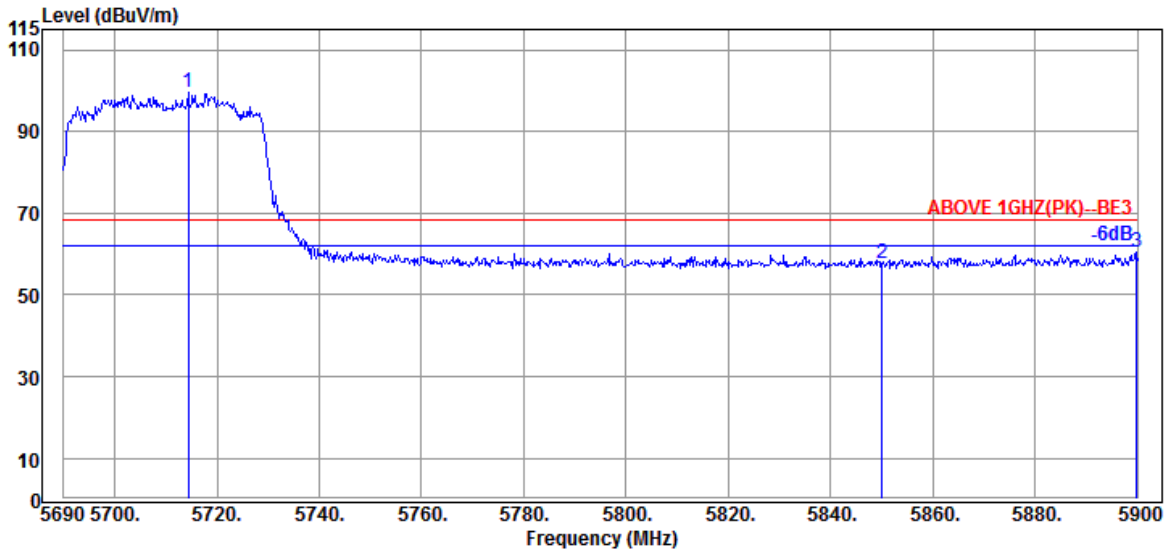

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.360	33.90	9.19	39.30	95.67	99.46	---	---	Peak
5850.020	34.00	9.25	39.33	53.75	57.67	68.20	10.53	Peak
5899.790	34.10	9.28	39.34	56.25	60.29	68.20	7.91	Peak

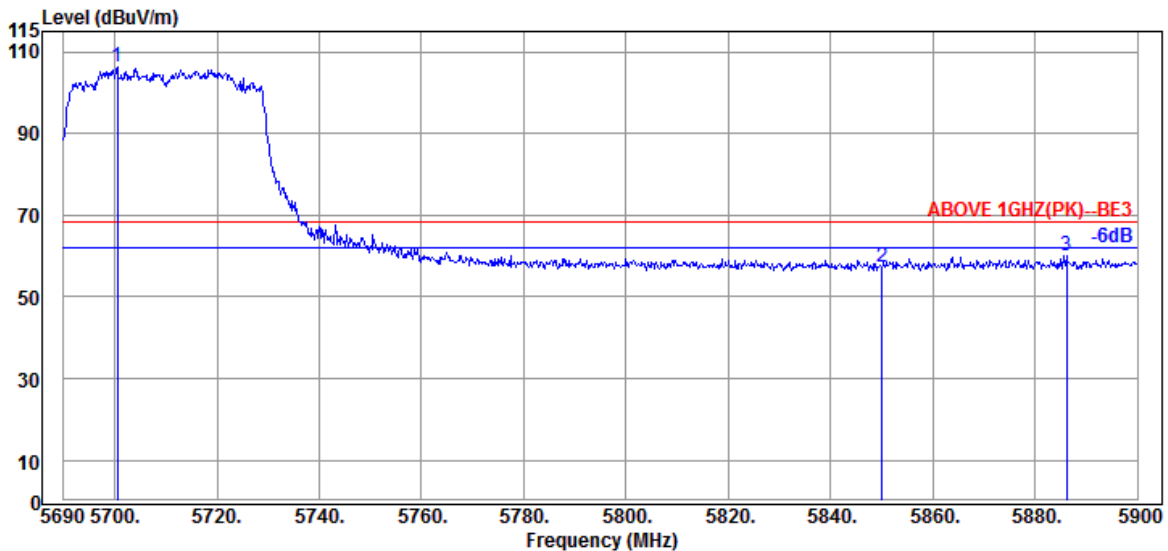


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.500	33.90	9.18	39.30	102.43	106.21	---	---	Peak
5850.020	34.00	9.25	39.33	53.30	57.22	68.20	10.98	Peak
5886.140	34.07	9.27	39.34	56.03	60.03	68.20	8.17	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

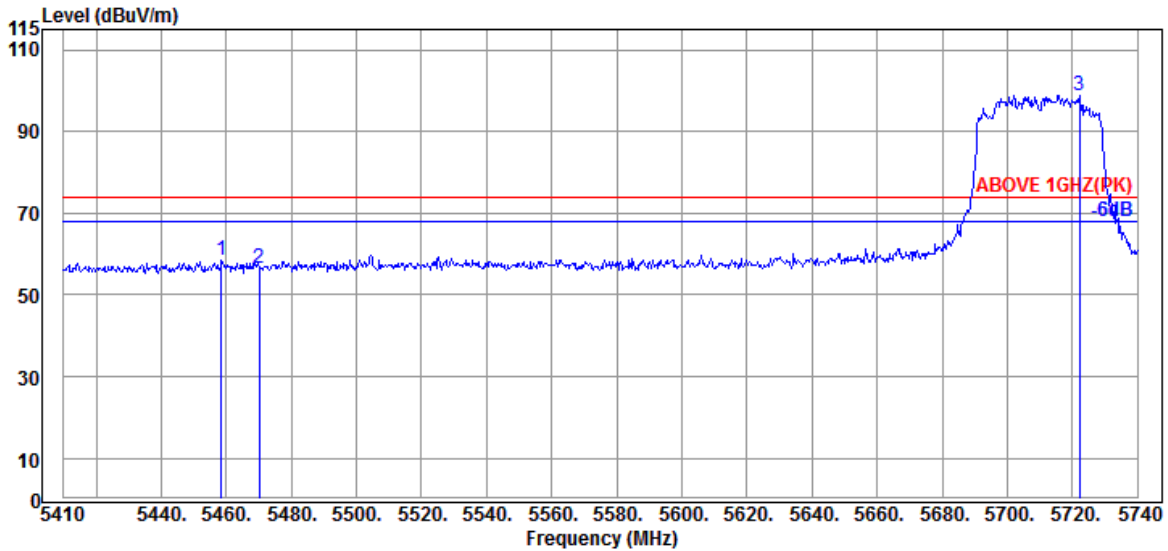

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.20	9.05	39.26	54.58	58.57	74.00	15.43	Peak
5470.060	34.17	9.06	39.26	52.69	56.66	74.00	17.34	Peak
@ 5722.180	33.90	9.20	39.30	94.99	98.79	---	---	Peak

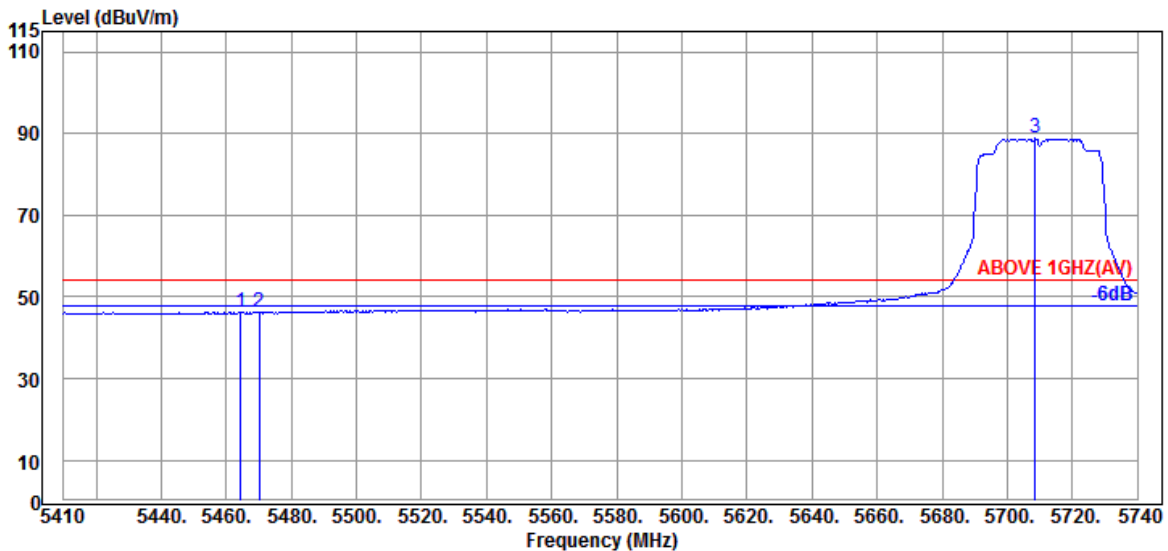


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.17	9.06	39.26	42.26	46.23	54.00	7.77	Average
5470.060	34.17	9.06	39.26	42.18	46.15	54.00	7.85	Average
@ 5708.650	33.90	9.19	39.30	85.01	88.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

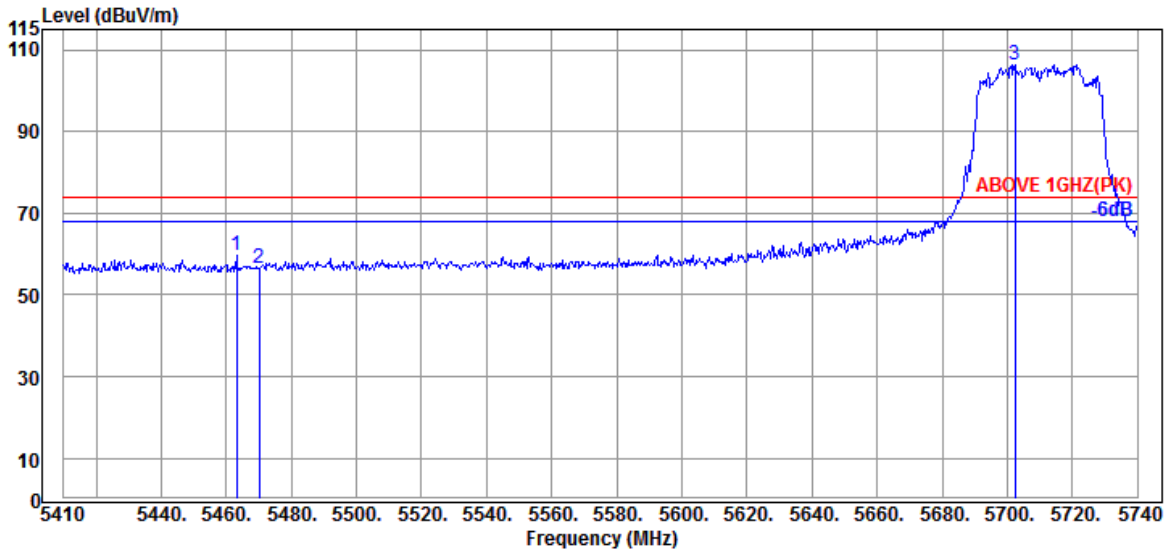

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.130	34.20	9.05	39.26	55.65	59.64	74.00	14.36	Peak
5470.060	34.17	9.06	39.26	52.61	56.58	74.00	17.42	Peak
@ 5702.380	33.90	9.18	39.30	102.53	106.31	---	---	Peak

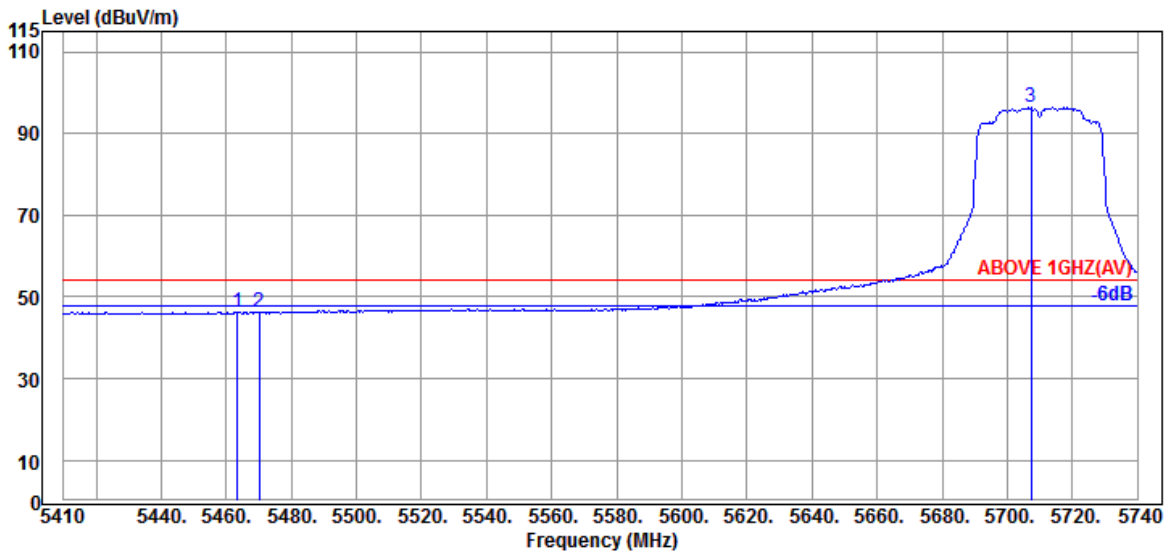


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.460	34.20	9.05	39.26	42.32	46.31	54.00	7.69	Average
5470.060	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
@ 5707.330	33.90	9.19	39.30	92.59	96.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

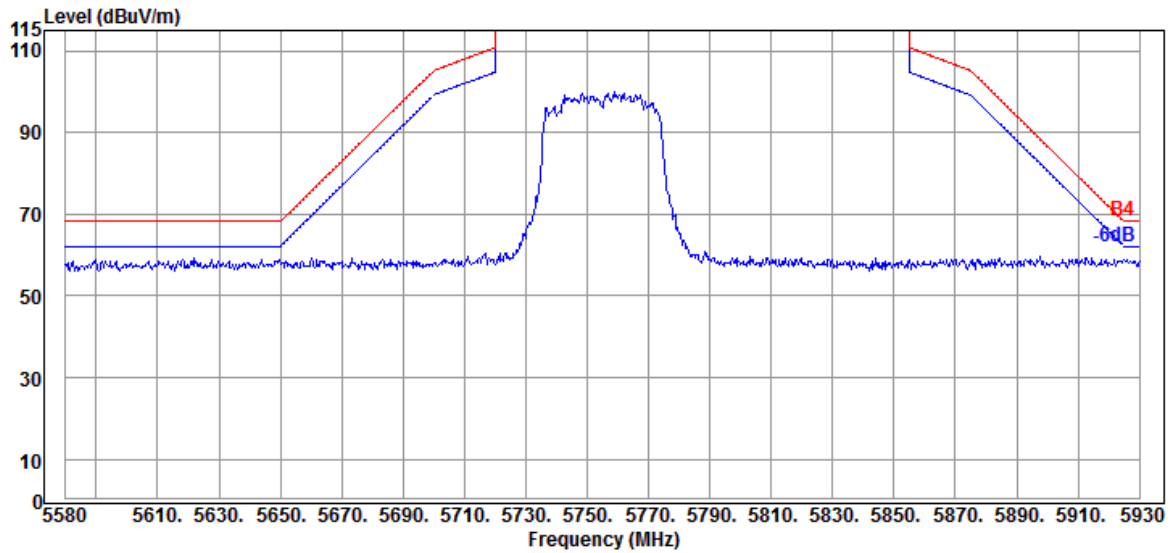


Antenna at Vertical Polarization

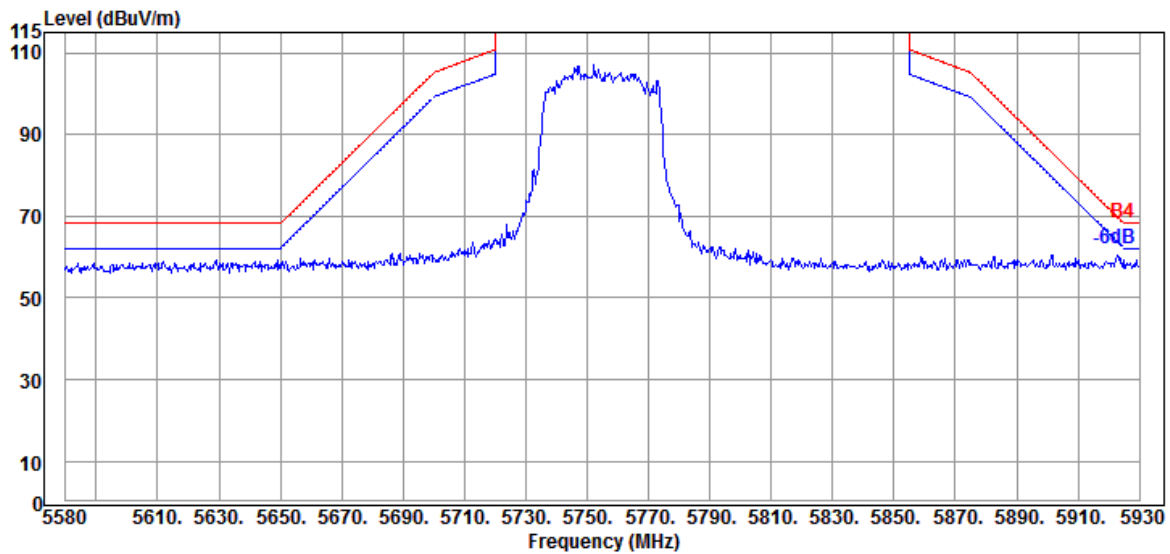


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

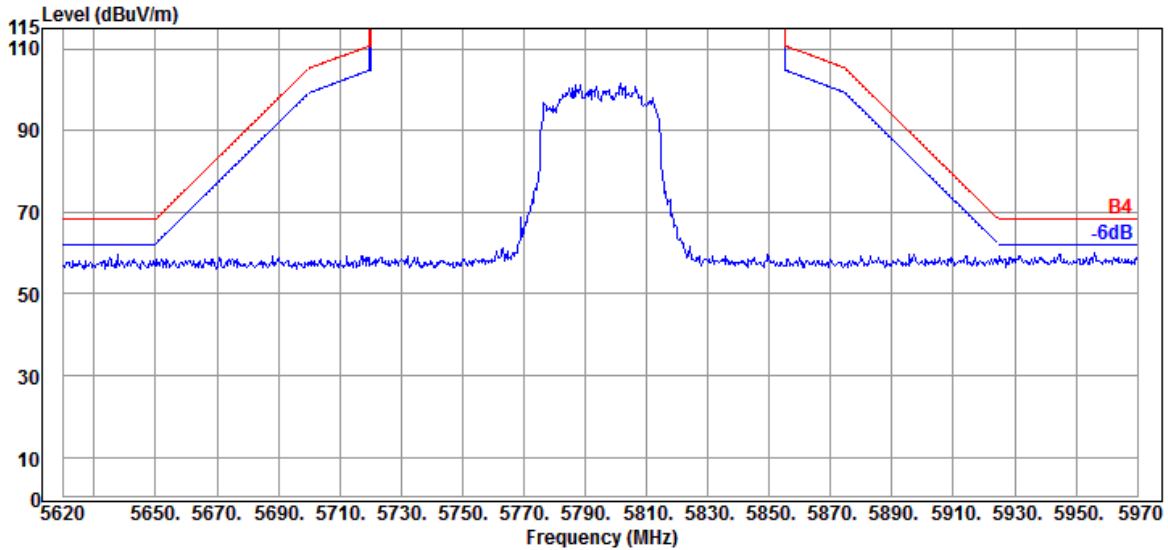

Antenna at Vertical Polarization

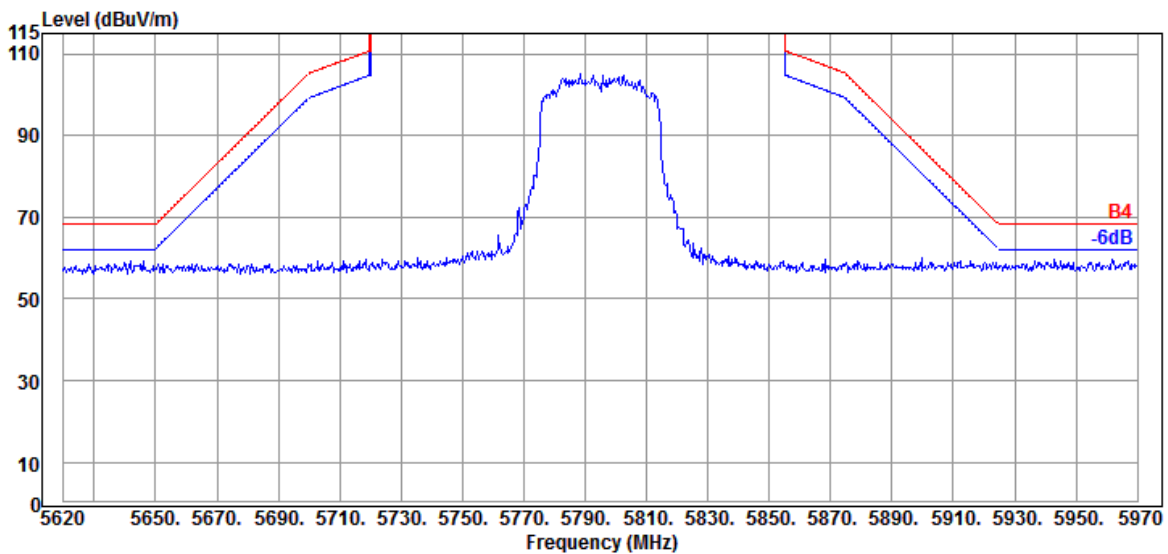


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

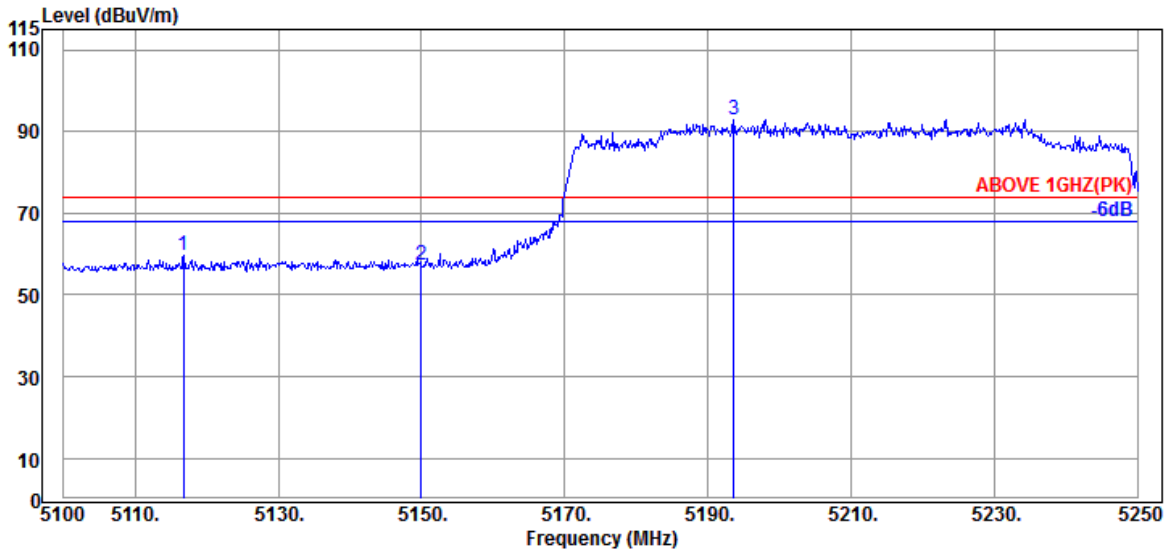

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.800	33.70	8.87	39.29	56.31	59.59	74.00	14.41	Peak
5149.950	33.70	8.88	39.29	53.82	57.11	74.00	16.89	Peak
@ 5193.600	33.90	8.91	39.28	89.26	92.79	---	---	Peak

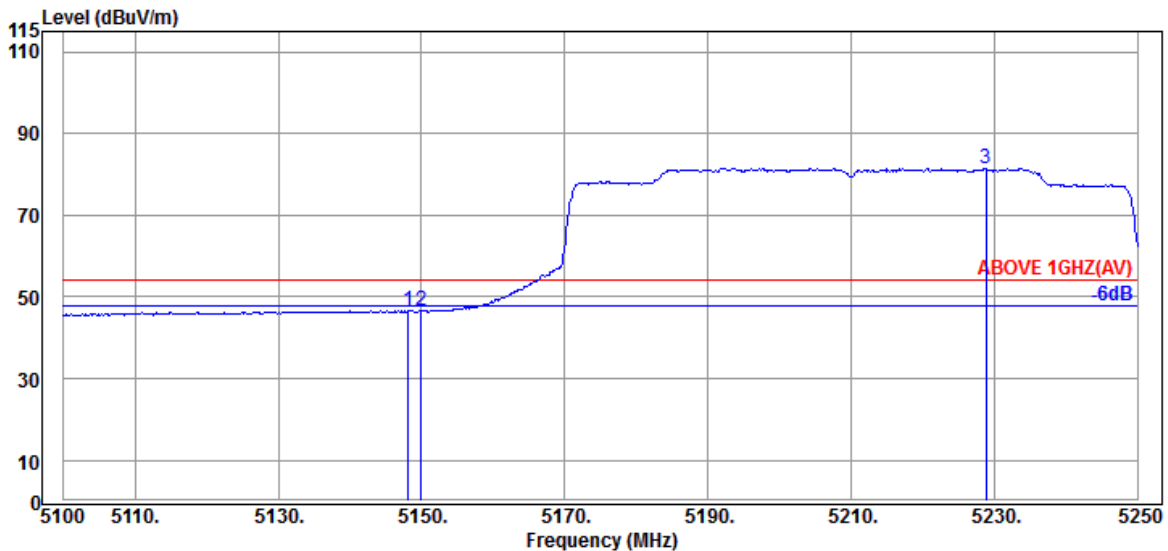


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	33.70	8.88	39.29	43.44	46.73	54.00	7.27	Average
5149.950	33.70	8.88	39.29	43.27	46.56	54.00	7.44	Average
@ 5228.850	33.85	8.93	39.28	78.00	81.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

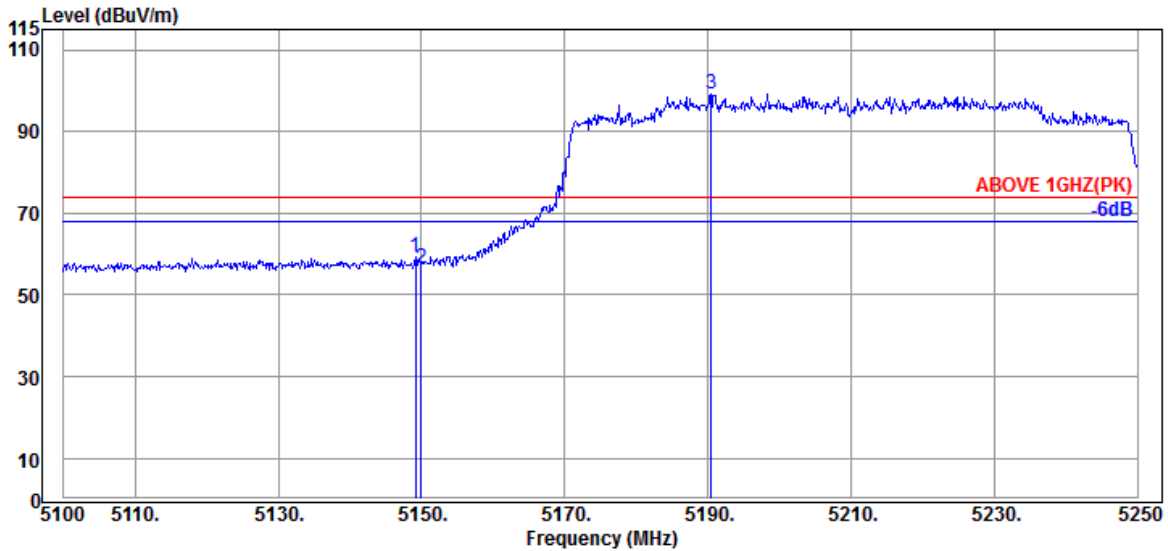

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.88	39.29	56.15	59.44	74.00	14.56	Peak
5149.950	33.70	8.88	39.29	53.34	56.63	74.00	17.37	Peak
@ 5190.450	33.90	8.91	39.28	95.69	99.22	---	---	Peak

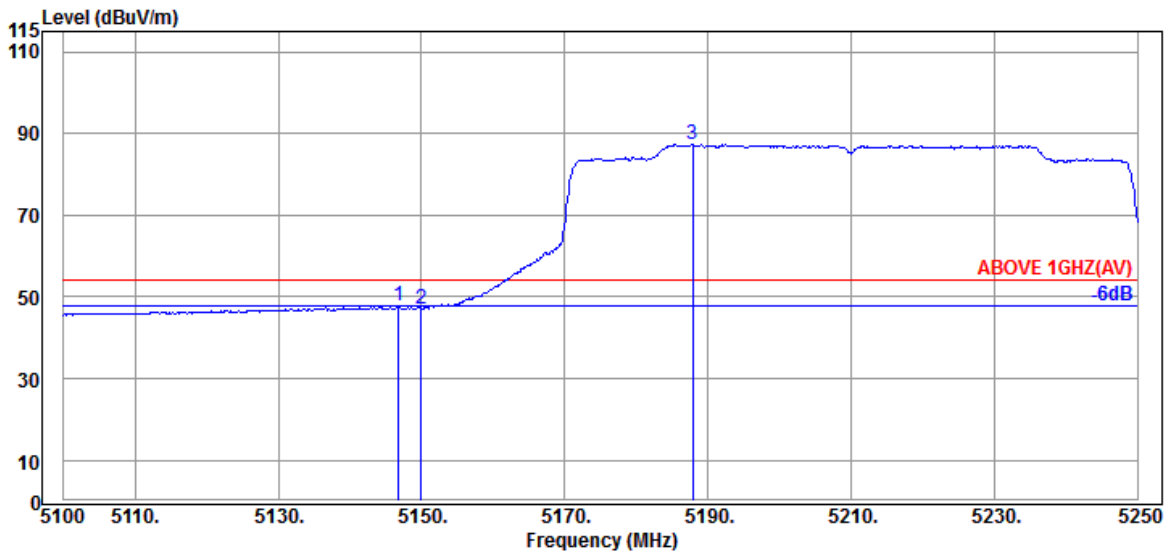


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.70	8.88	39.29	44.37	47.66	54.00	6.34	Average
5149.950	33.70	8.88	39.29	43.70	46.99	54.00	7.01	Average
@ 5187.900	33.90	8.91	39.28	83.82	87.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

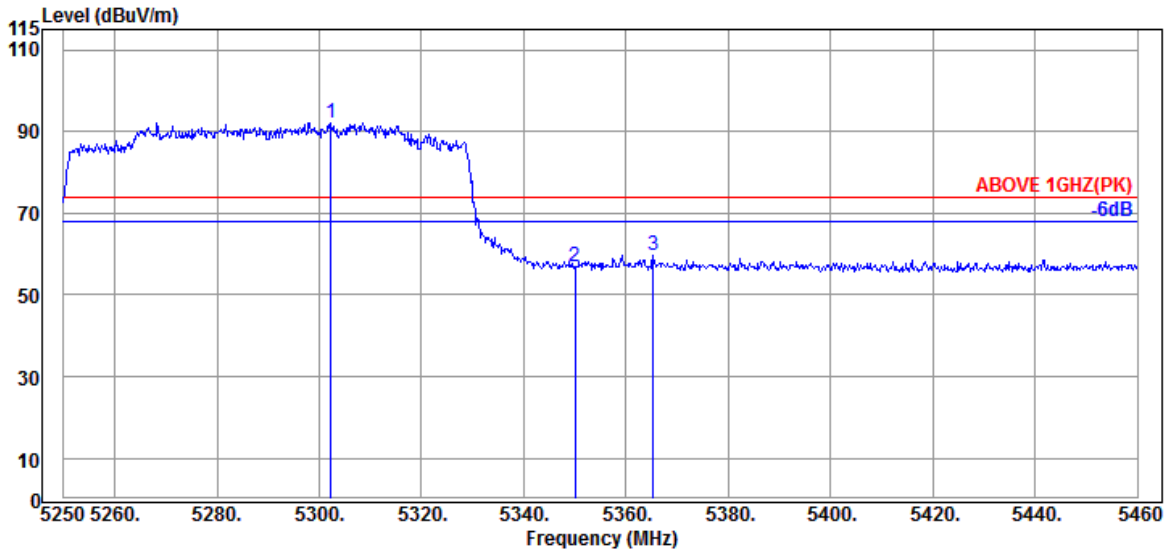

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.290	33.90	8.97	39.28	88.67	92.26	---	---	Peak
5349.960	34.00	8.99	39.27	53.03	56.75	74.00	17.25	Peak
5365.290	34.07	9.00	39.27	56.04	59.84	74.00	14.16	Peak

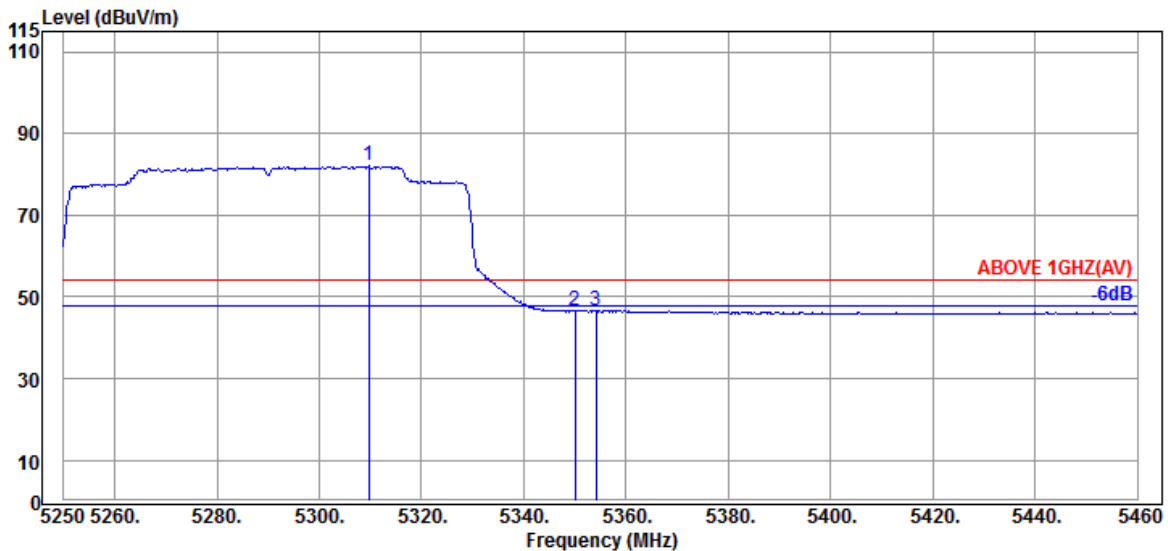


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.640	33.93	8.98	39.28	78.41	82.04	---	---	Average
5349.960	34.00	8.99	39.27	42.96	46.68	54.00	7.32	Average
5354.160	34.07	9.00	39.27	42.97	46.77	54.00	7.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

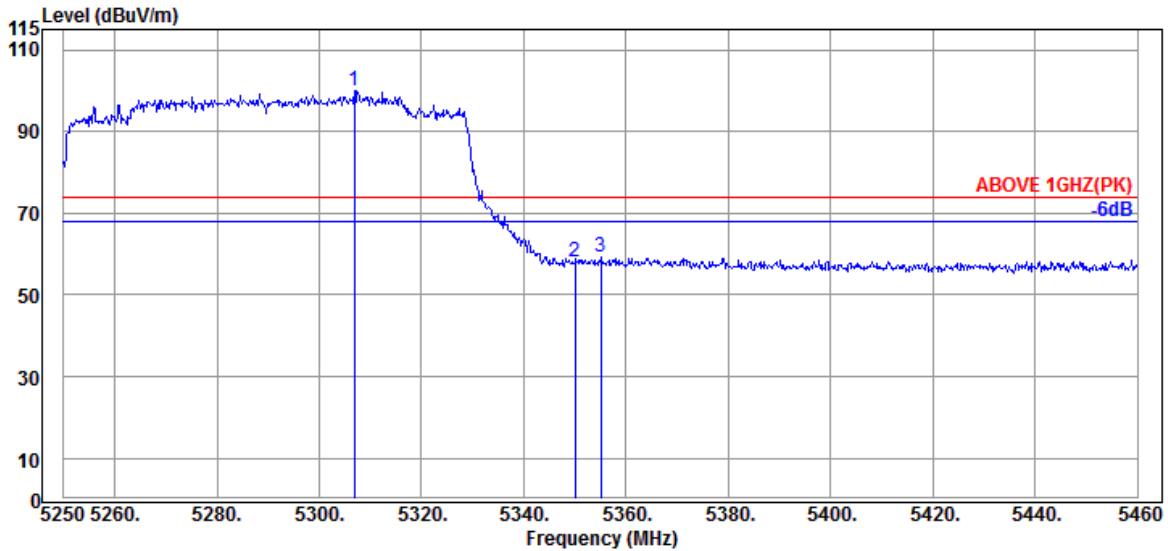

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.910	33.90	8.97	39.28	96.55	100.14	---	---	Peak
5349.960	34.00	8.99	39.27	54.54	58.26	74.00	15.74	Peak
5355.000	34.07	9.00	39.27	55.29	59.09	74.00	14.91	Peak

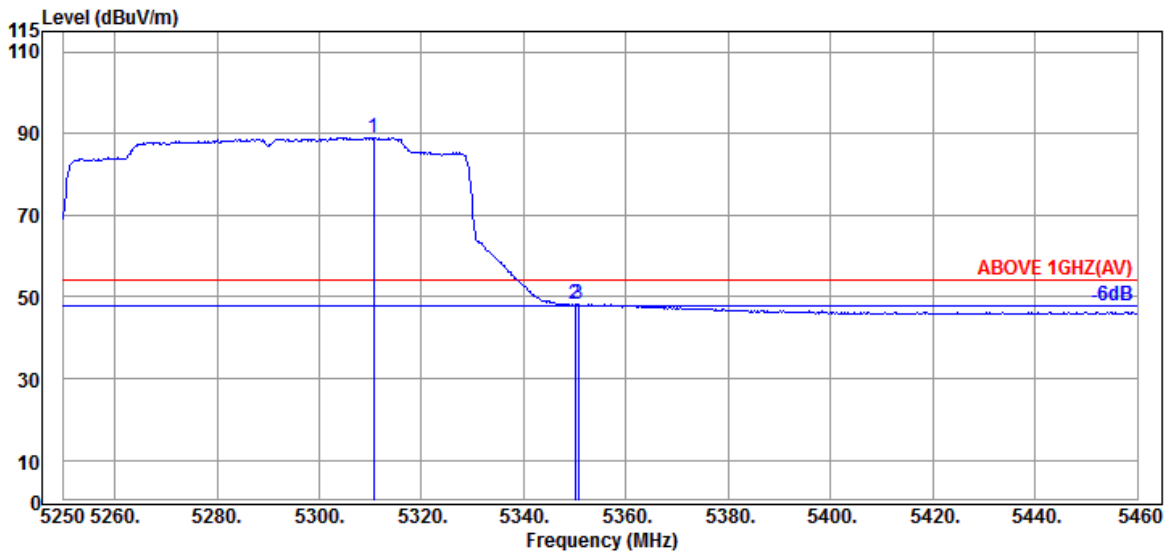


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.690	33.93	8.98	39.27	85.30	88.94	---	---	Average
5349.960	34.00	8.99	39.27	44.40	48.12	54.00	5.88	Average
5350.590	34.00	8.99	39.27	44.53	48.25	54.00	5.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

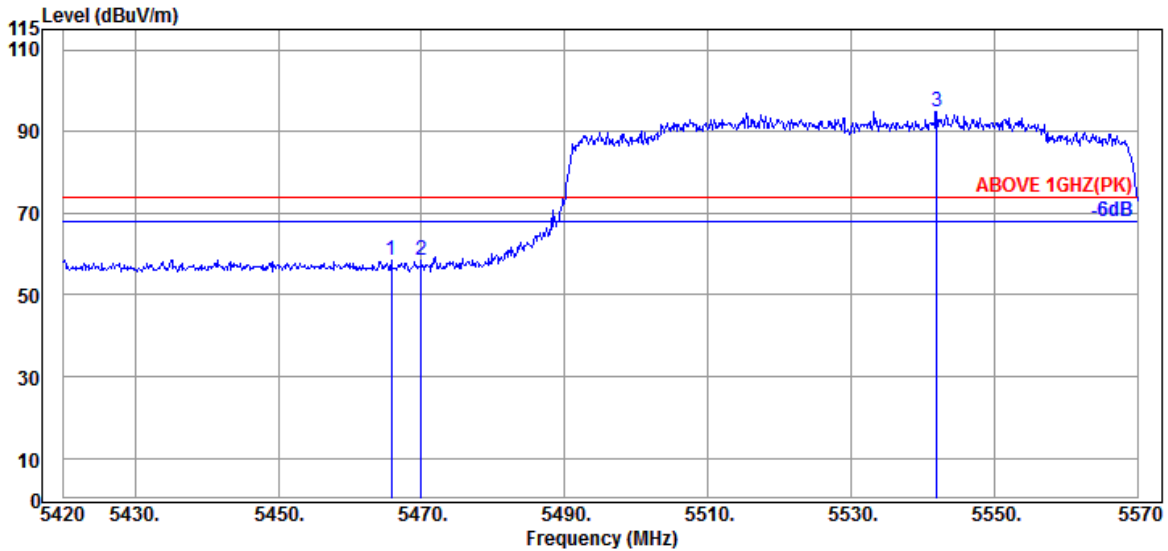

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.17	9.06	39.26	54.70	58.67	74.00	15.33	Peak
5469.950	34.17	9.06	39.26	54.43	58.40	74.00	15.60	Peak
@ 5541.950	34.03	9.09	39.27	91.12	94.97	---	---	Peak

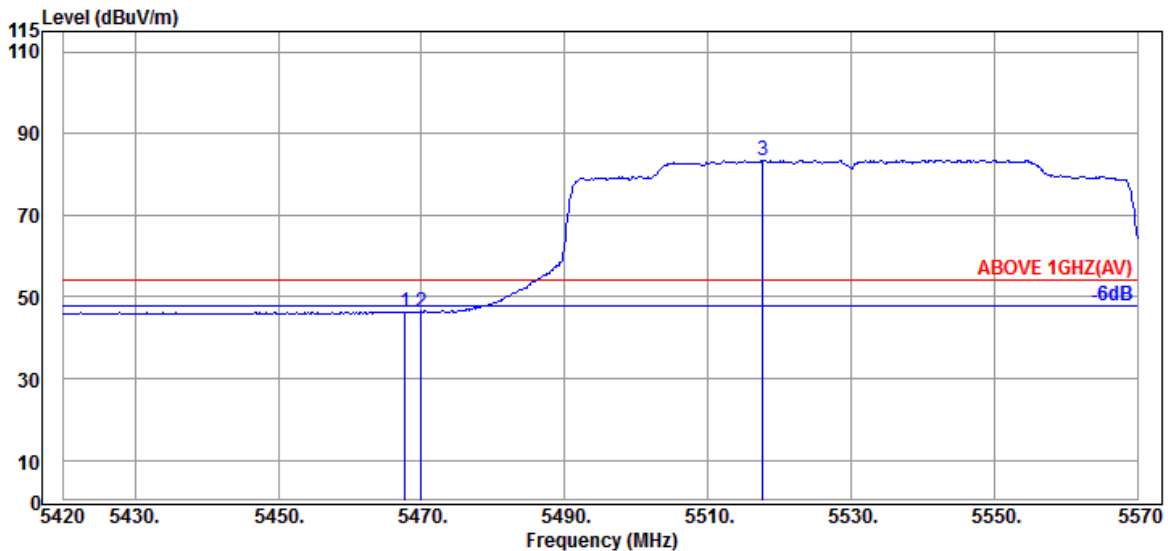


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.17	9.06	39.26	42.40	46.37	54.00	7.63	Average
5469.950	34.17	9.06	39.26	42.34	46.31	54.00	7.69	Average
@ 5517.650	34.07	9.09	39.26	79.63	83.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

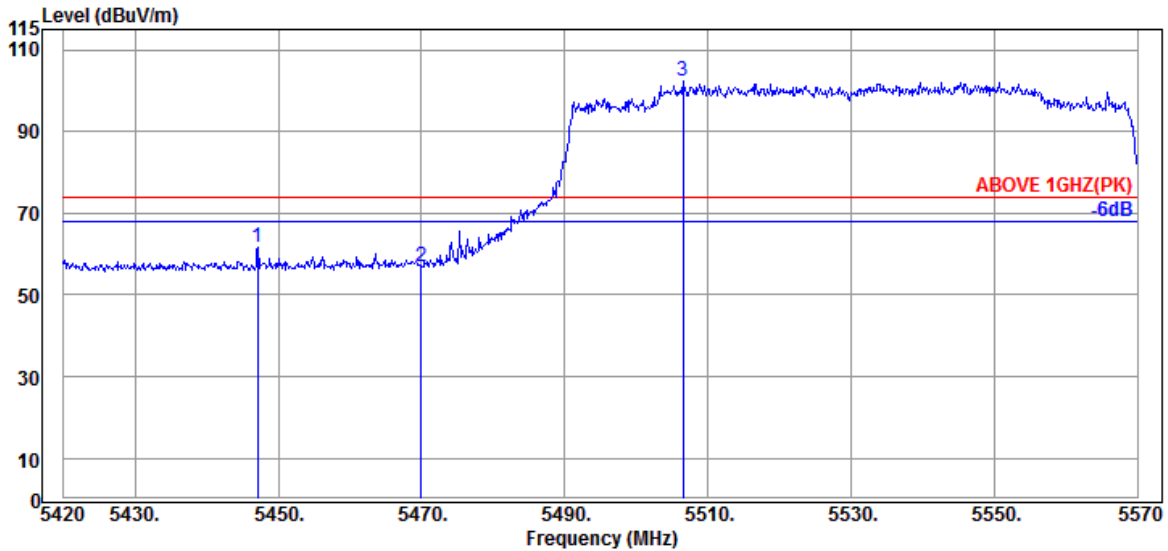

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.150	34.20	9.04	39.26	57.55	61.53	74.00	12.47	Peak
5469.950	34.17	9.06	39.26	52.99	56.96	74.00	17.04	Peak
@ 5506.550	34.10	9.08	39.26	98.36	102.28	---	---	Peak

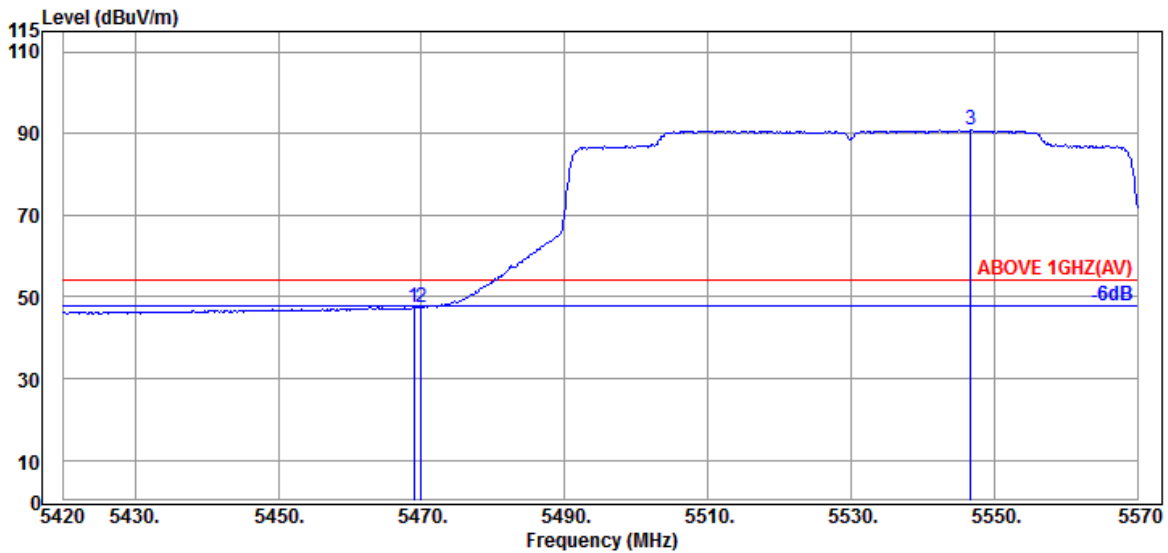


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	43.51	47.48	54.00	6.52	Average
5469.950	34.17	9.06	39.26	43.35	47.32	54.00	6.68	Average
@ 5546.750	34.00	9.10	39.27	87.01	90.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

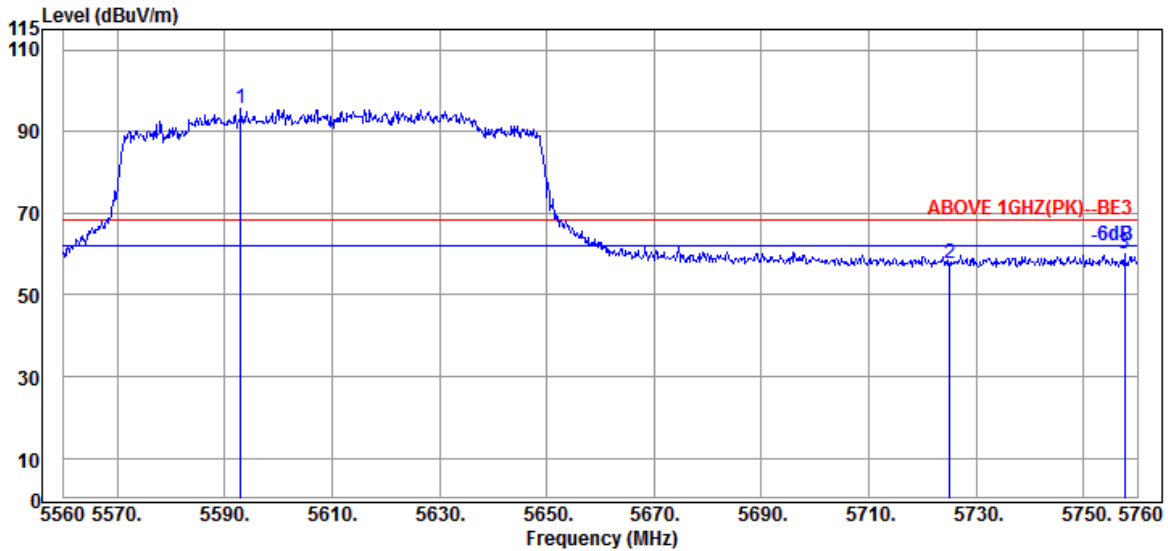

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.000	34.00	9.13	39.28	91.66	95.51	---	---	Peak
5725.000	33.90	9.20	39.30	53.74	57.54	68.20	10.66	Peak
5757.600	33.93	9.21	39.31	56.11	59.94	68.20	8.26	Peak

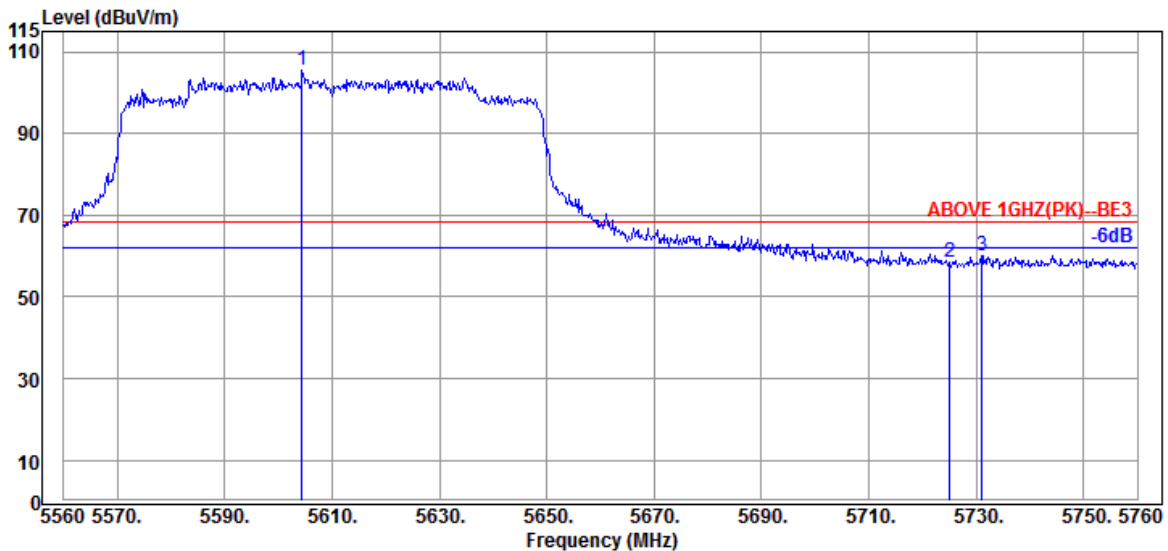


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5604.400	34.00	9.13	39.28	101.58	105.43	---	---	Peak
5725.000	33.90	9.20	39.30	54.64	58.44	68.20	9.76	Peak
5731.000	33.90	9.20	39.31	56.39	60.18	68.20	8.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

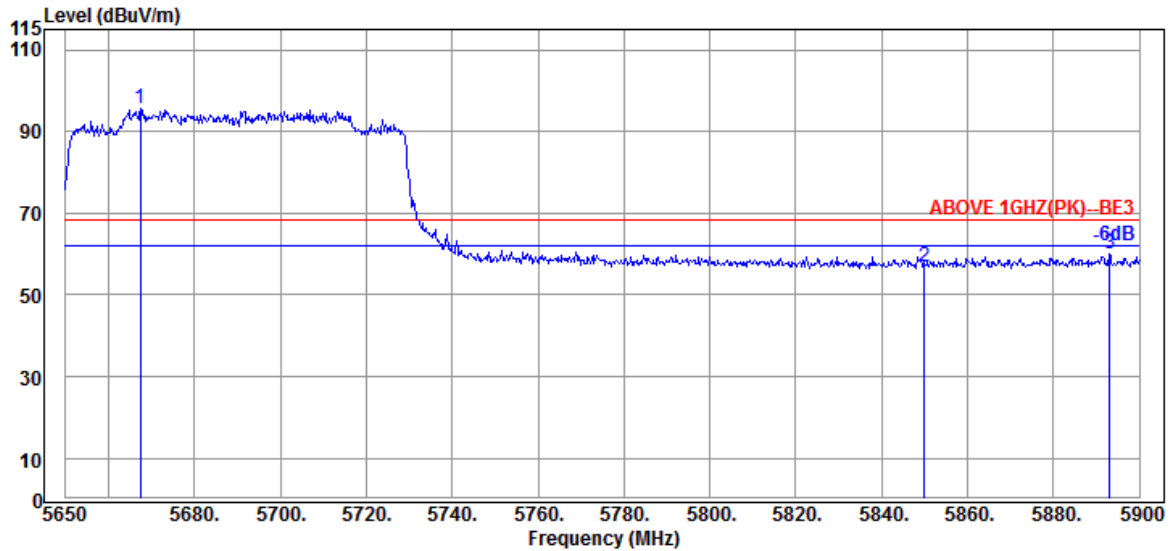

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.500	33.90	9.16	39.29	91.83	95.60	---	---	Peak
5850.000	34.00	9.25	39.33	52.97	56.89	68.20	11.31	Peak
5893.000	34.10	9.28	39.34	55.96	60.00	68.20	8.20	Peak

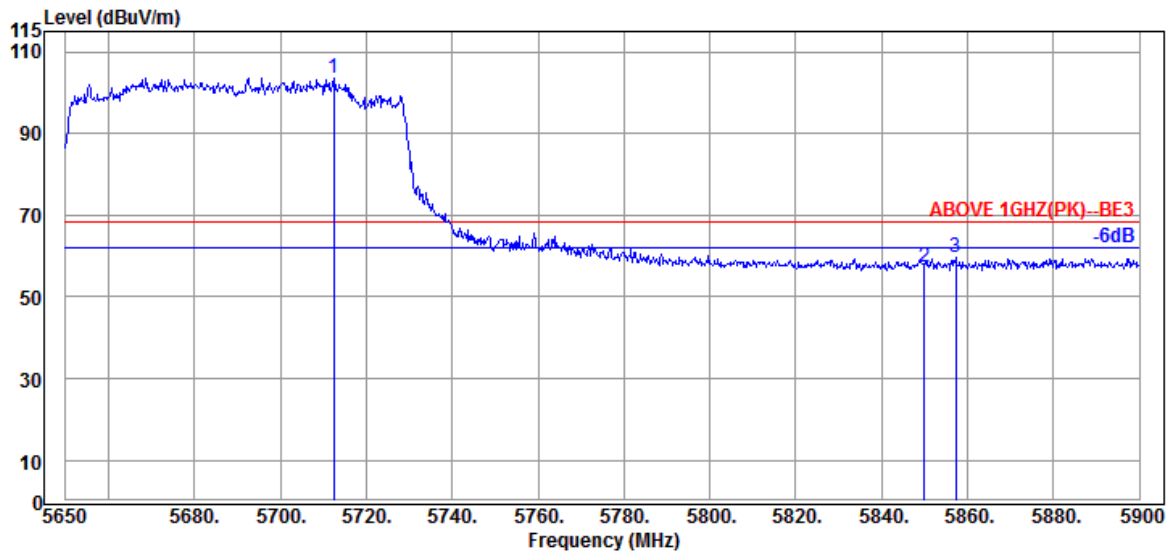


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.500	33.90	9.19	39.30	99.73	103.52	---	---	Peak
5850.000	34.00	9.25	39.33	53.41	57.33	68.20	10.87	Peak
5857.250	34.03	9.26	39.33	55.67	59.63	68.20	8.57	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

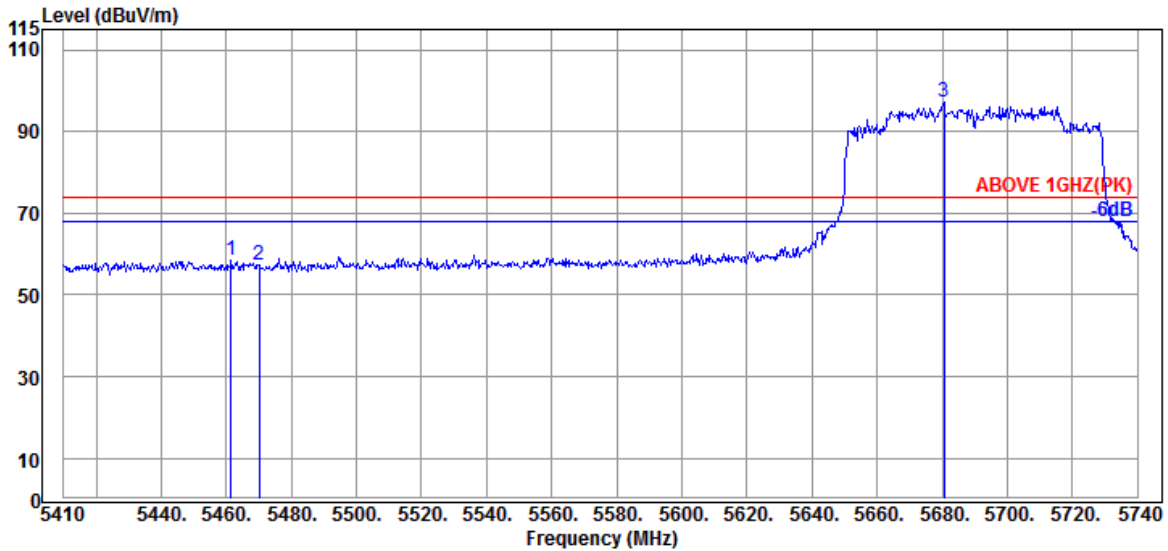

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.480	34.20	9.05	39.26	54.50	58.49	74.00	15.51	Peak
5470.060	34.17	9.06	39.26	53.53	57.50	74.00	16.50	Peak
@ 5680.600	33.90	9.17	39.30	93.64	97.41	---	---	Peak

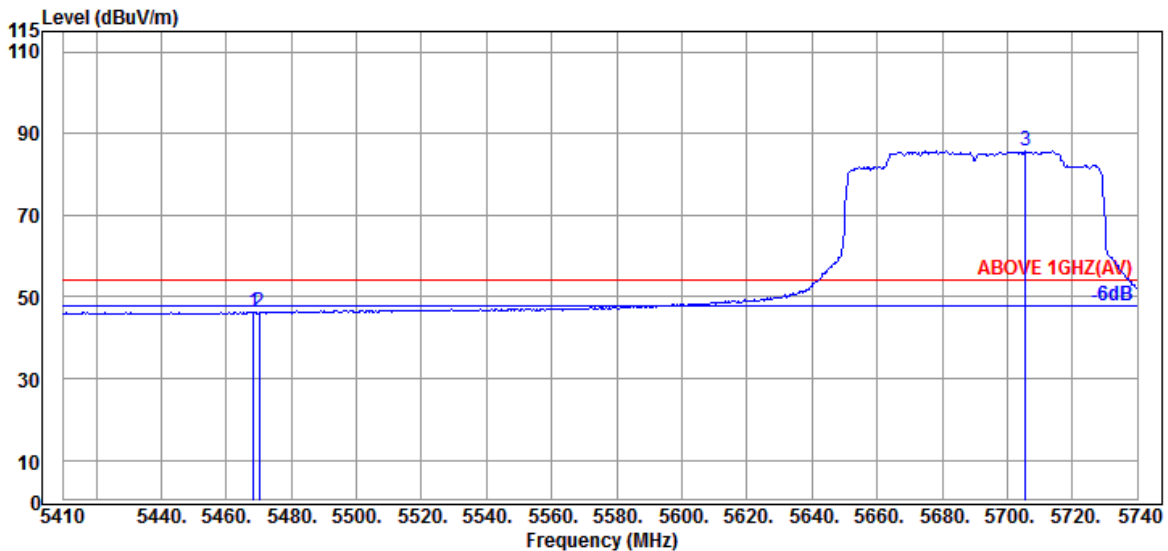


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.17	9.06	39.26	42.32	46.29	54.00	7.71	Average
5470.060	34.17	9.06	39.26	42.19	46.16	54.00	7.84	Average
@ 5705.680	33.90	9.19	39.30	81.90	85.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

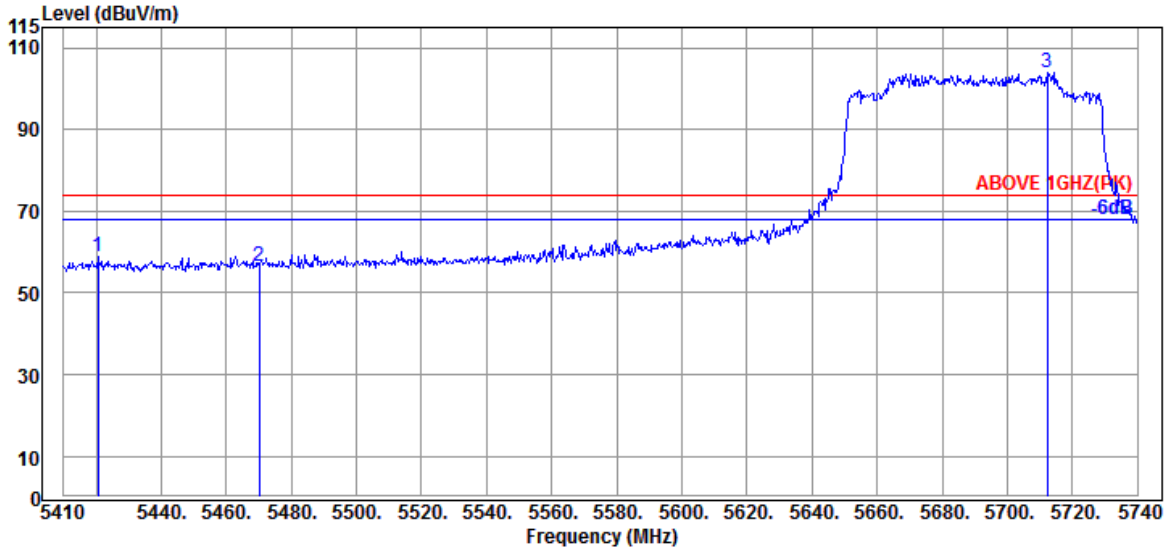

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.560	34.20	9.04	39.27	54.87	58.84	74.00	15.16	Peak
5470.060	34.17	9.06	39.26	52.73	56.70	74.00	17.30	Peak
@ 5712.280	33.90	9.19	39.30	100.19	103.98	---	---	Peak

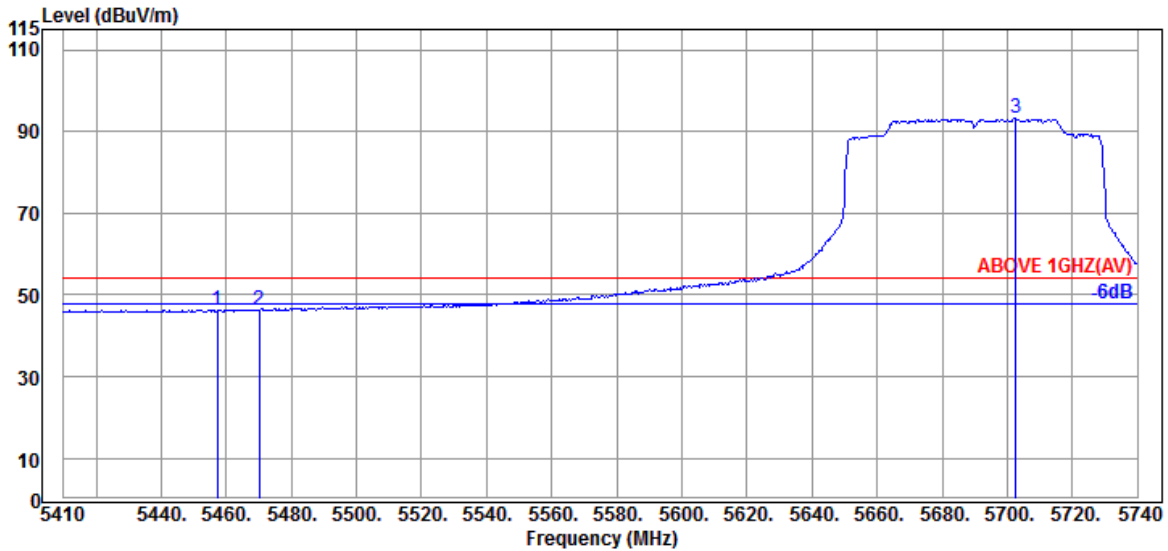


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.20	9.05	39.26	42.37	46.36	54.00	7.64	Average
5470.060	34.17	9.06	39.26	42.25	46.22	54.00	7.78	Average
@ 5702.710	33.90	9.18	39.30	89.56	93.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

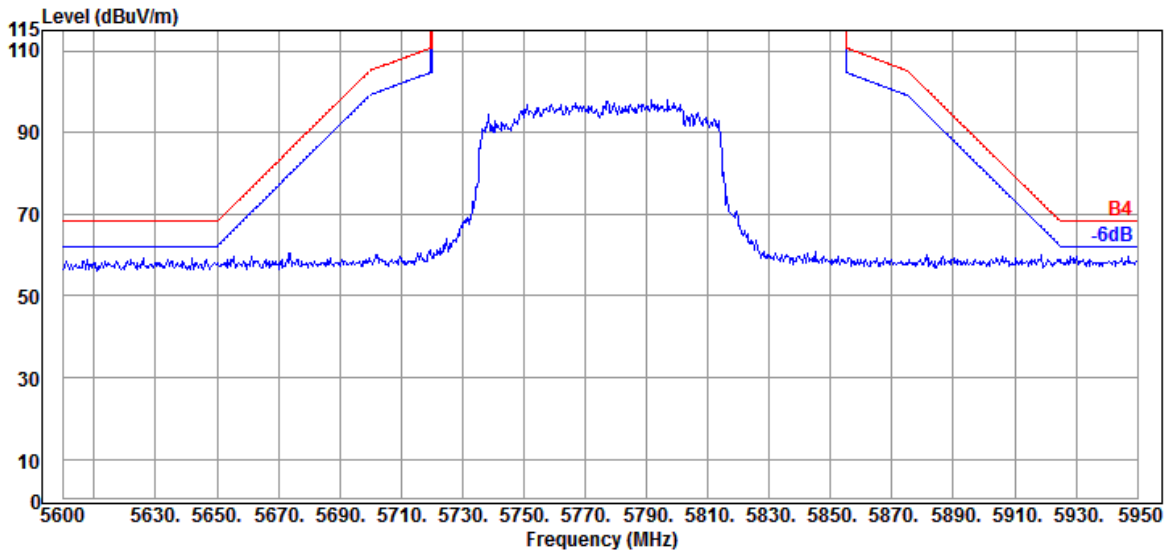

Antenna at Vertical Polarization

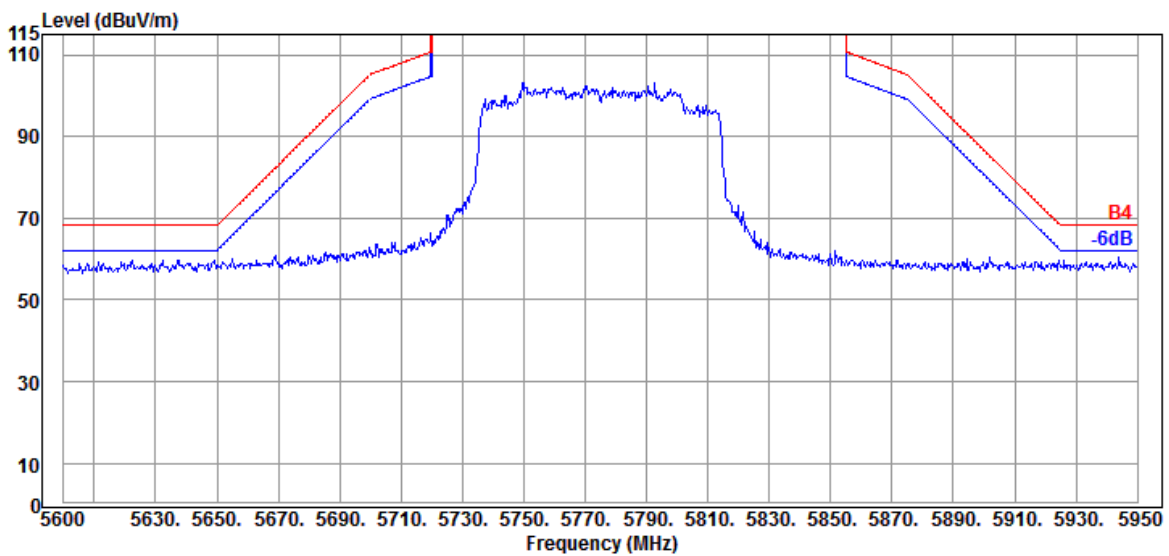


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

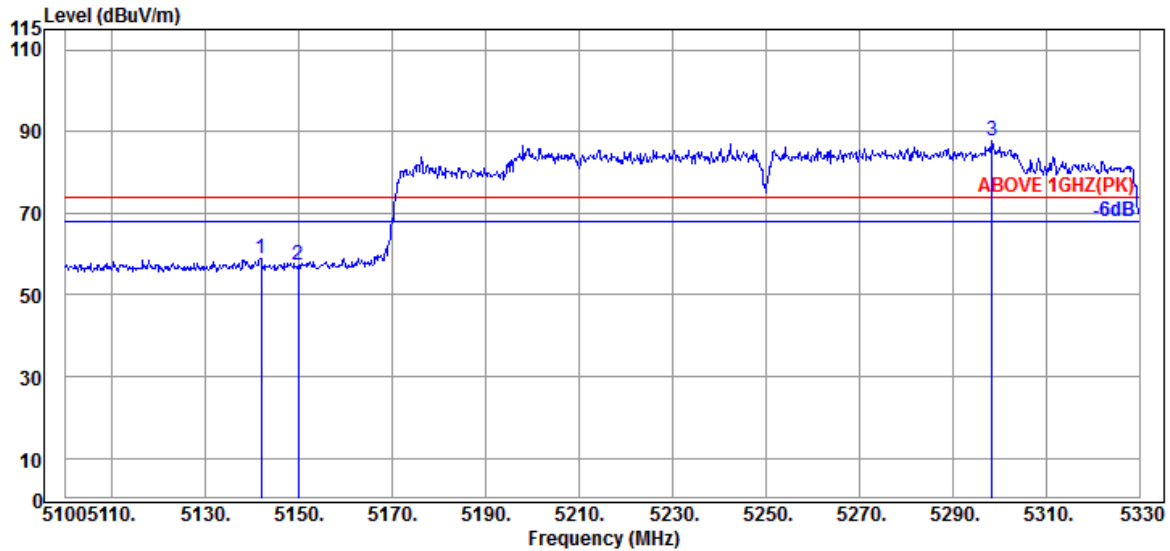

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.860	33.70	8.88	39.29	55.74	59.03	74.00	14.97	Peak
5149.910	33.70	8.88	39.29	54.15	57.44	74.00	16.56	Peak
@ 5298.490	33.90	8.97	39.28	84.27	87.86	---	---	Peak

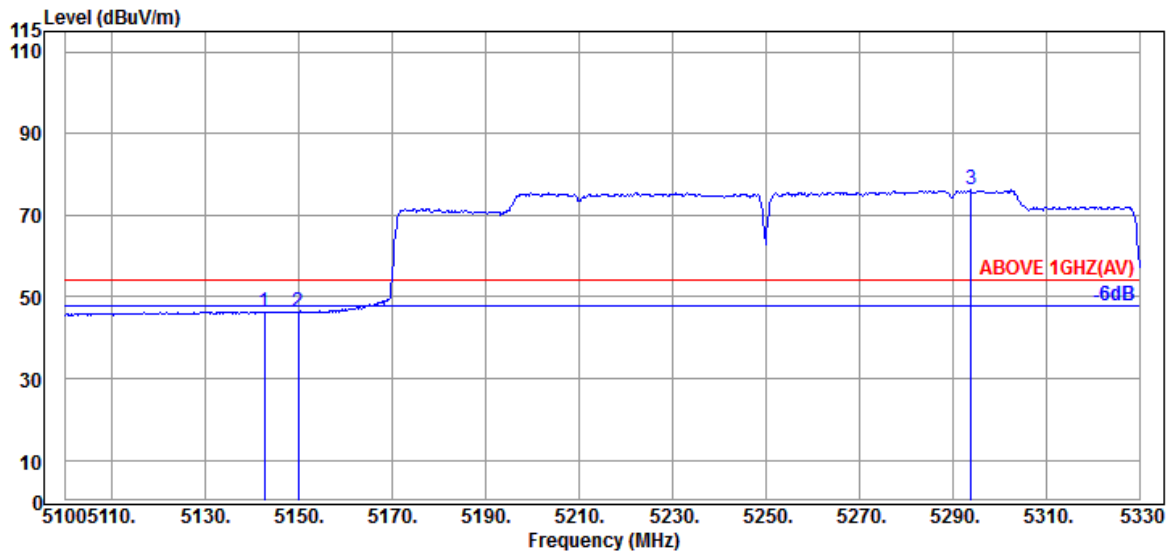


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.550	33.70	8.88	39.29	43.13	46.42	54.00	7.58	Average
5149.910	33.70	8.88	39.29	43.02	46.31	54.00	7.69	Average
@ 5293.890	33.90	8.97	39.28	72.53	76.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

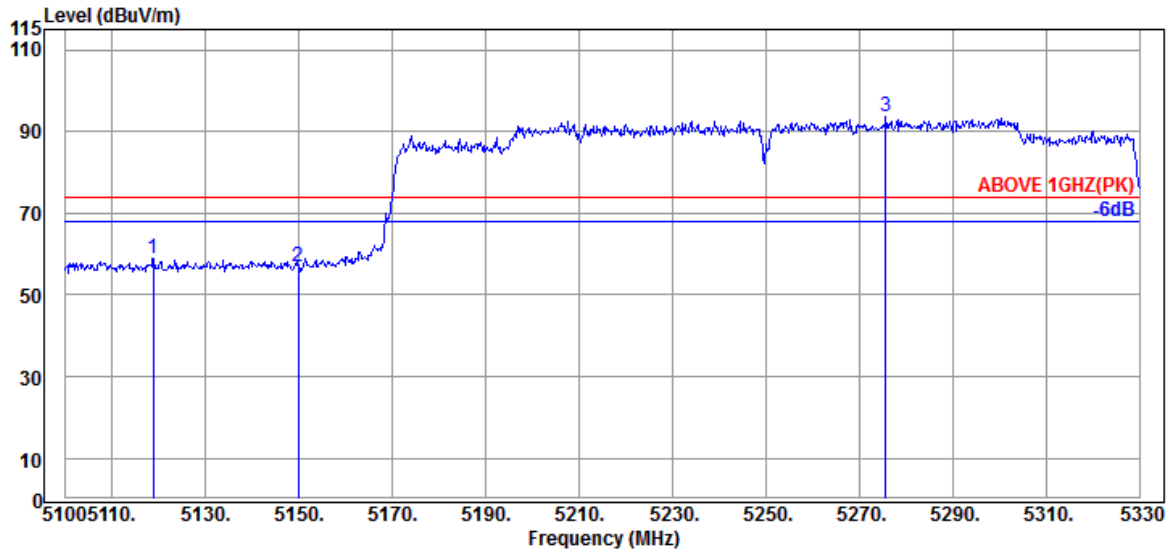

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.860	33.70	8.87	39.29	55.58	58.86	74.00	15.14	Peak
5149.910	33.70	8.88	39.29	53.66	56.95	74.00	17.05	Peak
@ 5275.720	33.83	8.95	39.28	90.07	93.57	---	---	Peak

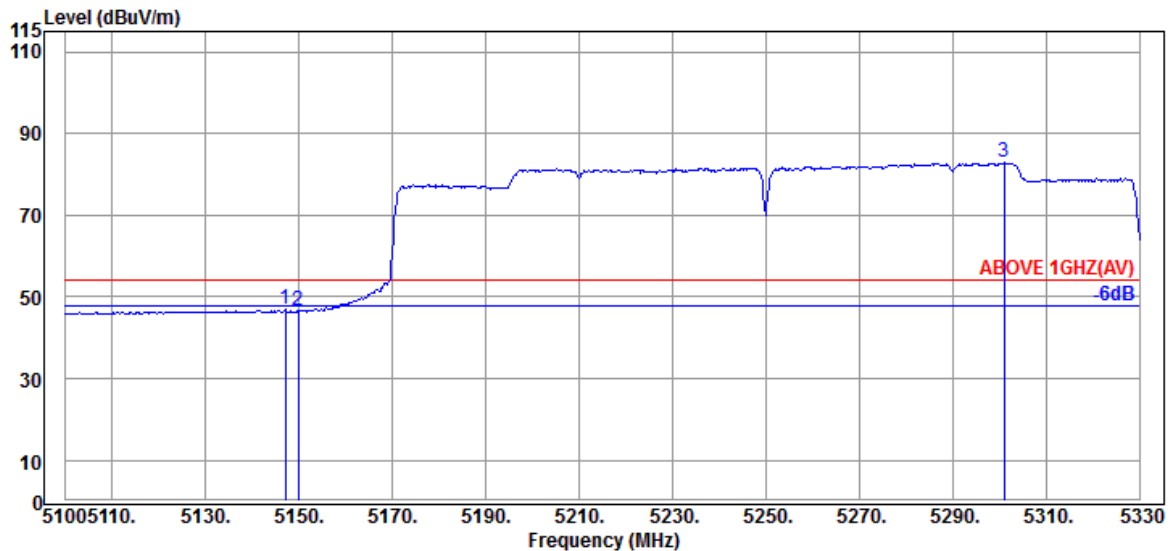


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.150	33.70	8.88	39.29	43.66	46.95	54.00	7.05	Average
5149.910	33.70	8.88	39.29	43.43	46.72	54.00	7.28	Average
@ 5301.020	33.90	8.97	39.28	79.45	83.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

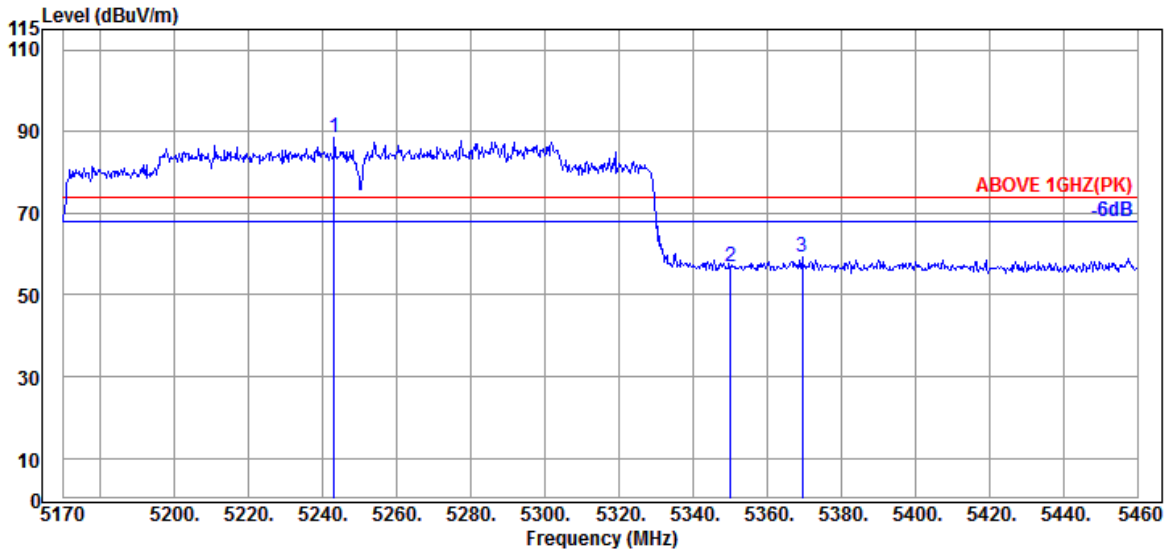

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5243.080	33.83	8.93	39.28	84.93	88.41	---	---	Peak
5350.090	34.00	8.99	39.27	53.16	56.88	74.00	17.12	Peak
5369.520	34.07	9.00	39.27	55.32	59.12	74.00	14.88	Peak

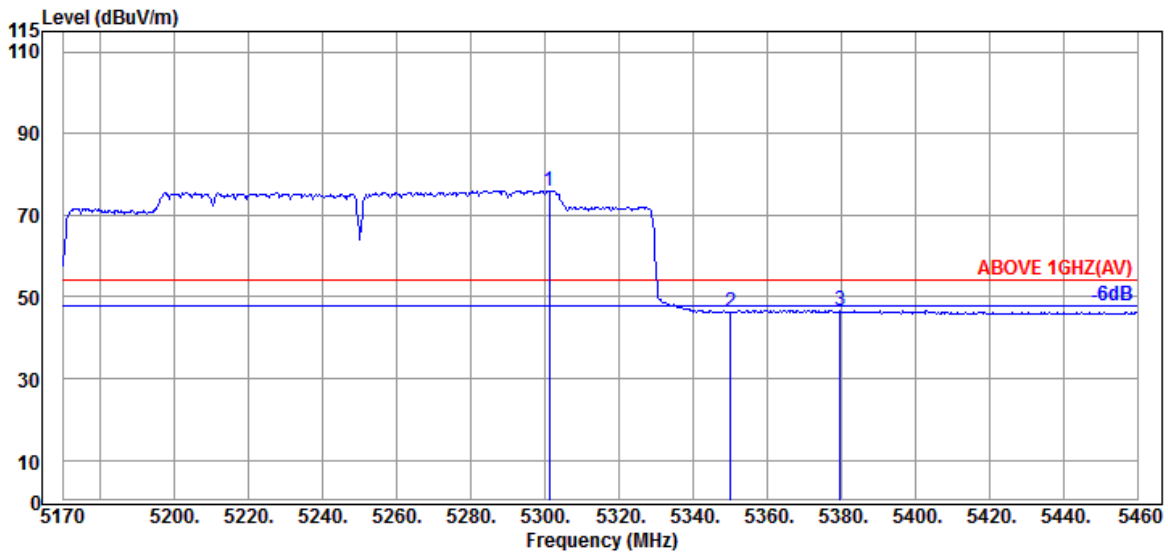


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.080	33.90	8.97	39.28	72.44	76.03	---	---	Average
5350.090	34.00	8.99	39.27	42.65	46.37	54.00	7.63	Average
5379.670	34.13	9.01	39.27	42.90	46.77	54.00	7.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

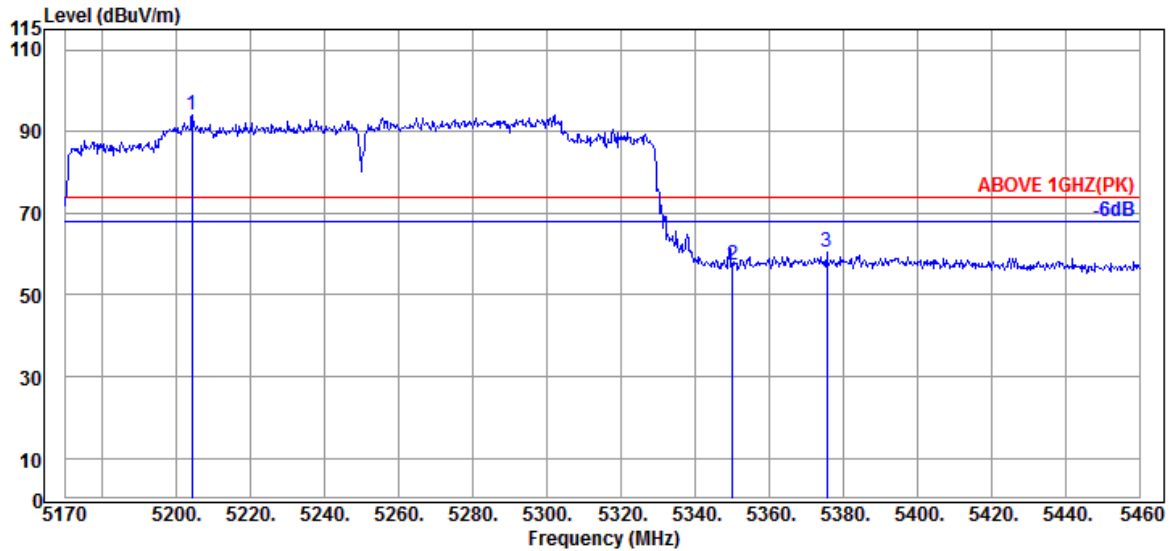

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5204.220	33.88	8.92	39.28	90.73	94.25	---	---	Peak
5350.090	34.00	8.99	39.27	53.59	57.31	74.00	16.69	Peak
5375.610	34.13	9.01	39.27	56.47	60.34	74.00	13.66	Peak

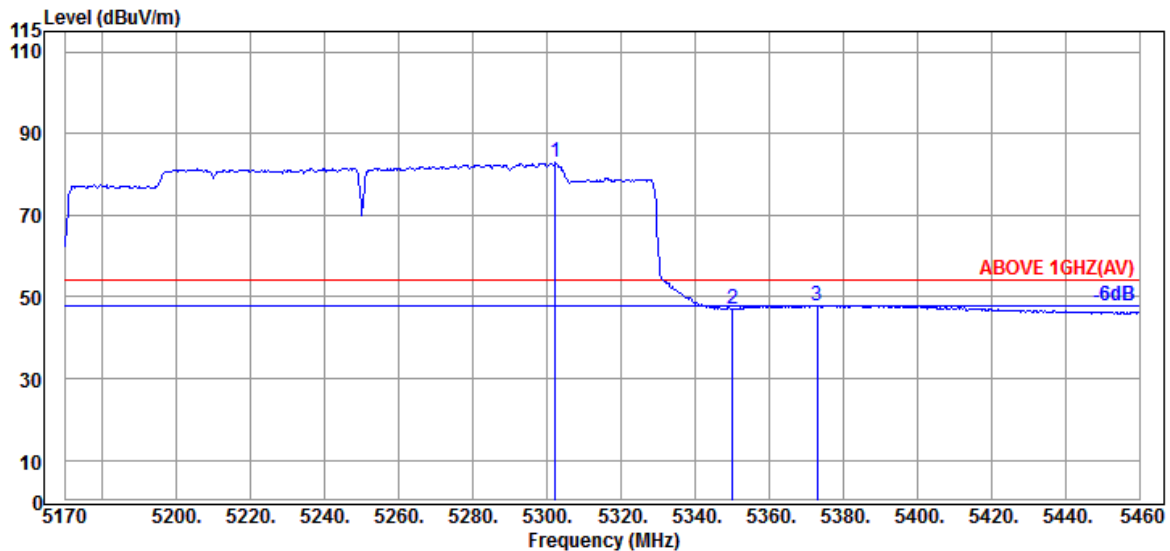


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	33.90	8.97	39.28	79.31	82.90	---	---	Average
5350.090	34.00	8.99	39.27	43.30	47.02	54.00	6.98	Average
5373.000	34.13	9.01	39.27	44.13	48.00	54.00	6.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

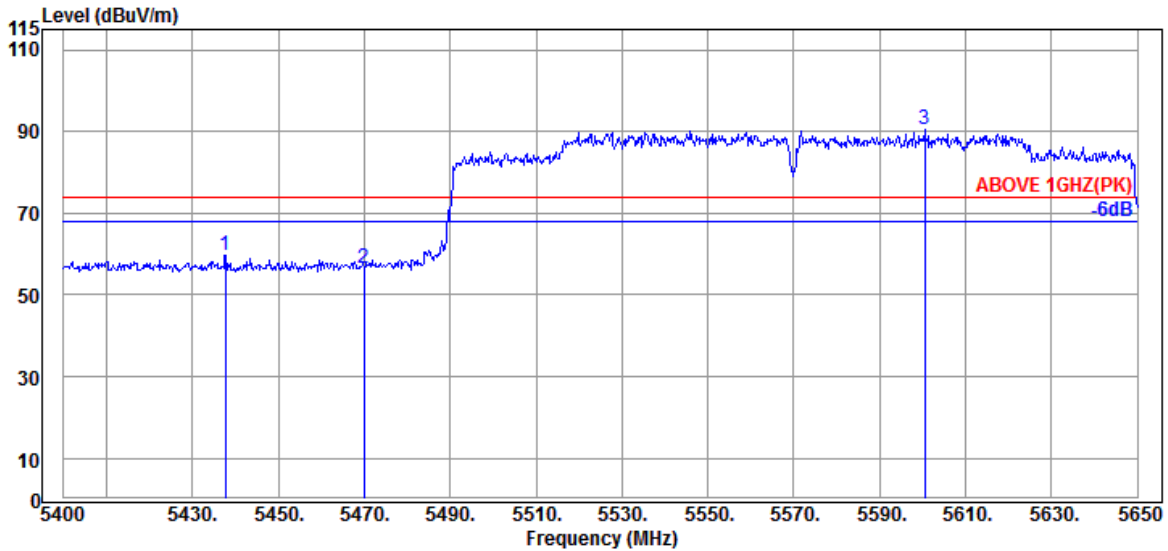

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.750	34.20	9.04	39.26	55.81	59.79	74.00	14.21	Peak
5470.000	34.17	9.06	39.26	52.73	56.70	74.00	17.30	Peak
@ 5600.500	34.00	9.13	39.28	86.77	90.62	---	---	Peak

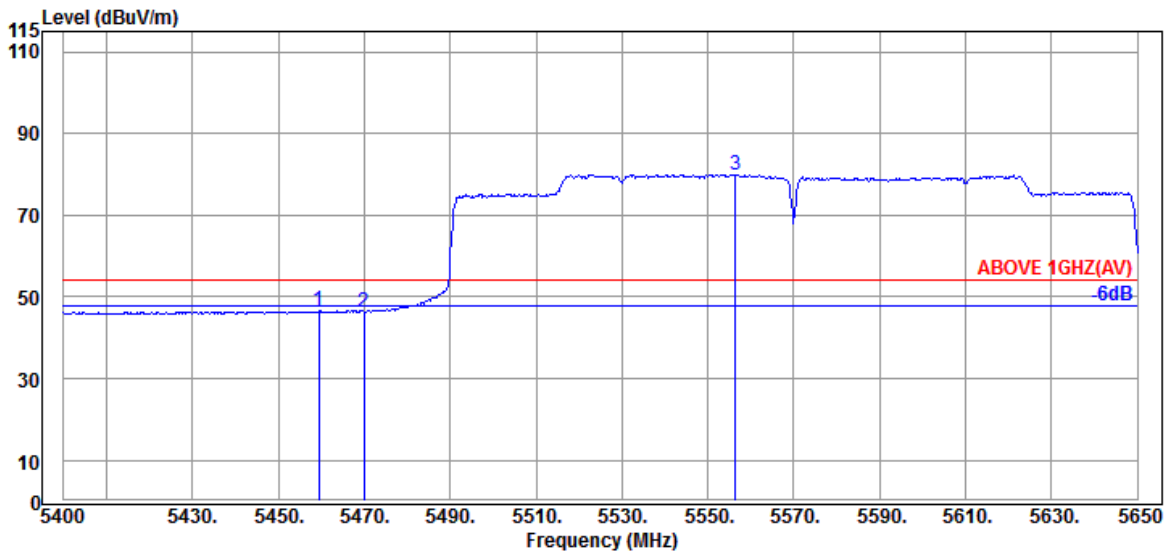


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.20	9.05	39.26	42.53	46.52	54.00	7.48	Average
5470.000	34.17	9.06	39.26	42.42	46.39	54.00	7.61	Average
@ 5556.500	34.00	9.10	39.27	76.17	80.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

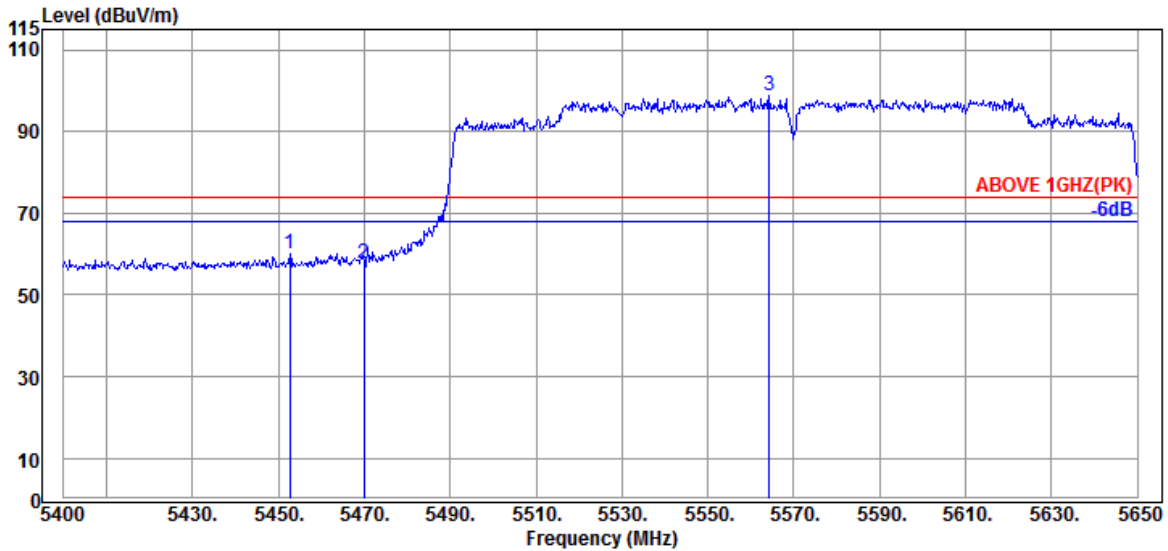

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.750	34.20	9.05	39.26	56.19	60.18	74.00	13.82	Peak
5470.000	34.17	9.06	39.26	53.69	57.66	74.00	16.34	Peak
@ 5564.250	34.00	9.11	39.27	94.86	98.70	---	---	Peak

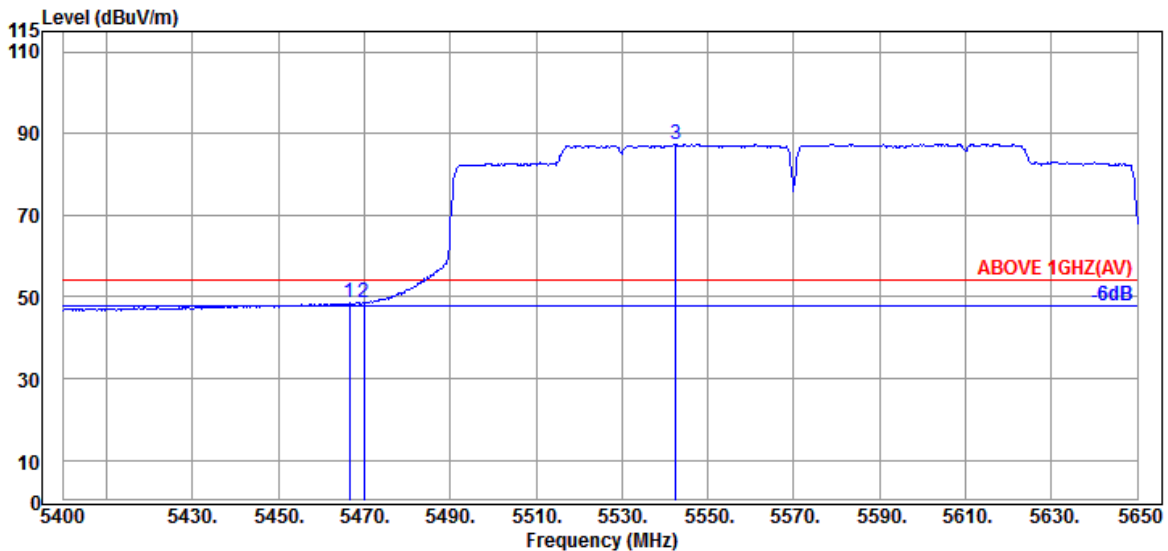


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.17	9.06	39.26	44.61	48.58	54.00	5.42	Average
5470.000	34.17	9.06	39.26	44.58	48.55	54.00	5.45	Average
@ 5542.500	34.03	9.09	39.27	83.60	87.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

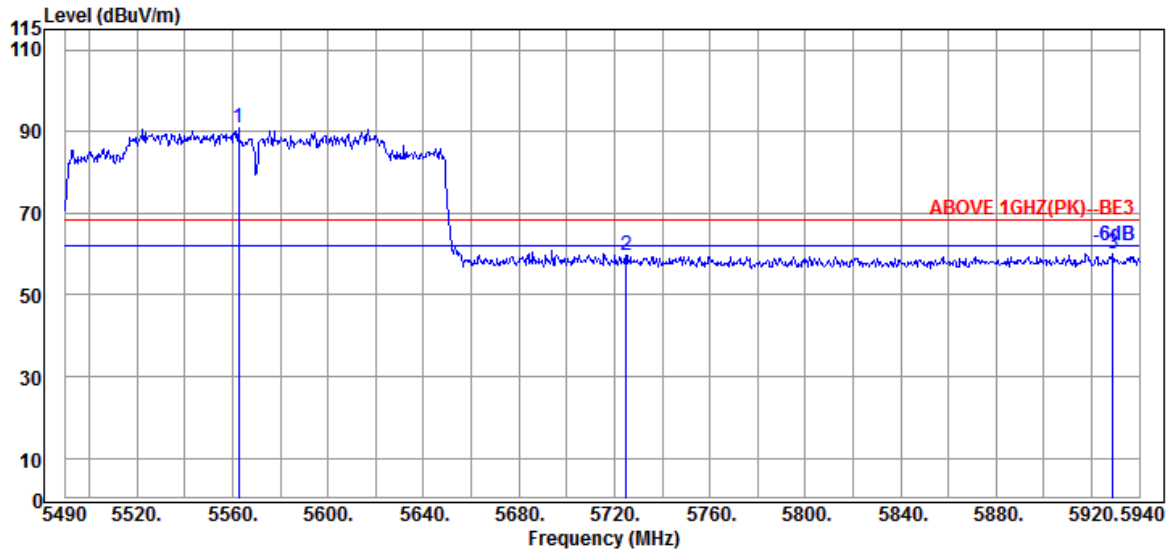

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5562.450	34.00	9.11	39.27	86.92	90.76	---	---	Peak
5724.900	33.90	9.20	39.30	55.69	59.49	68.20	8.71	Peak
5928.750	34.23	9.30	39.35	56.03	60.21	68.20	7.99	Peak

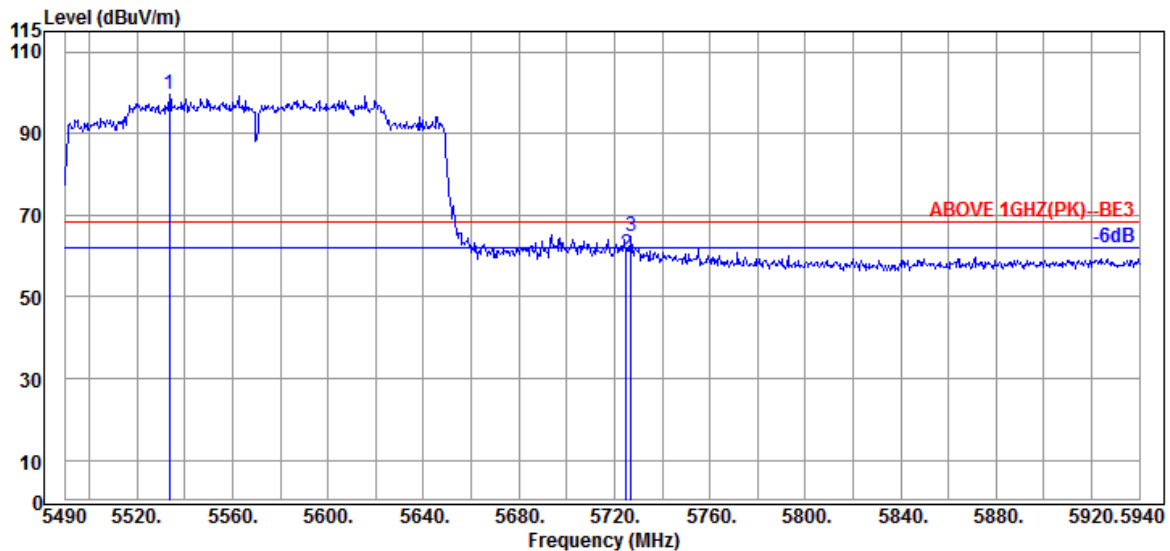


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5533.650	34.03	9.09	39.27	95.76	99.61	---	---	Peak
5724.900	33.90	9.20	39.30	56.70	60.50	68.20	7.70	Peak
5727.150	33.90	9.20	39.31	60.94	64.73	68.20	3.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

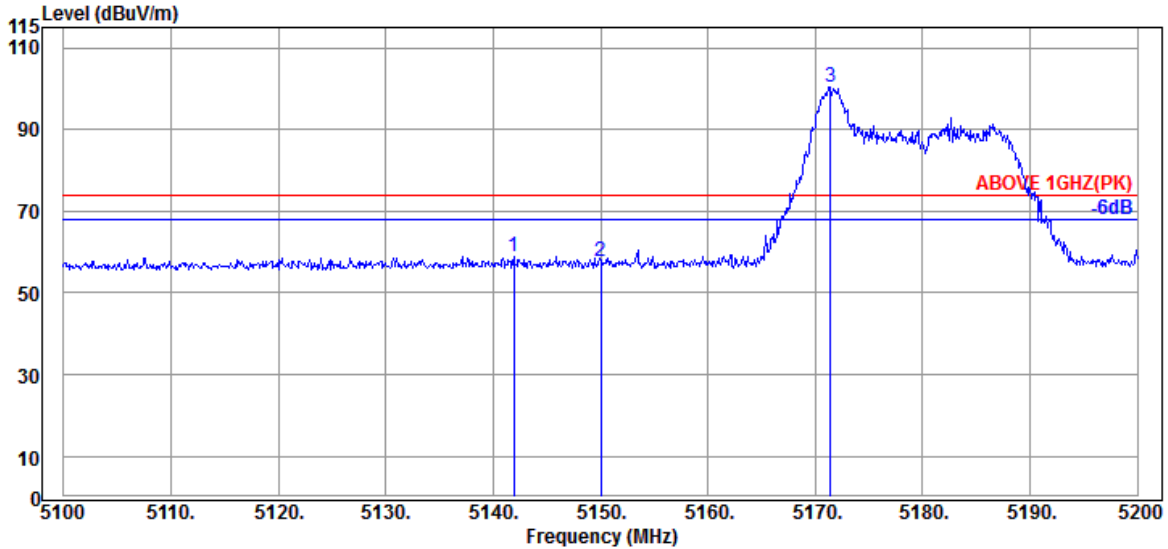

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	33.70	8.88	39.29	55.61	58.90	74.00	15.10	Peak
5150.000	33.70	8.88	39.29	54.38	57.67	74.00	16.33	Peak
@ 5171.400	33.77	8.89	39.29	96.88	100.25	---	---	Peak

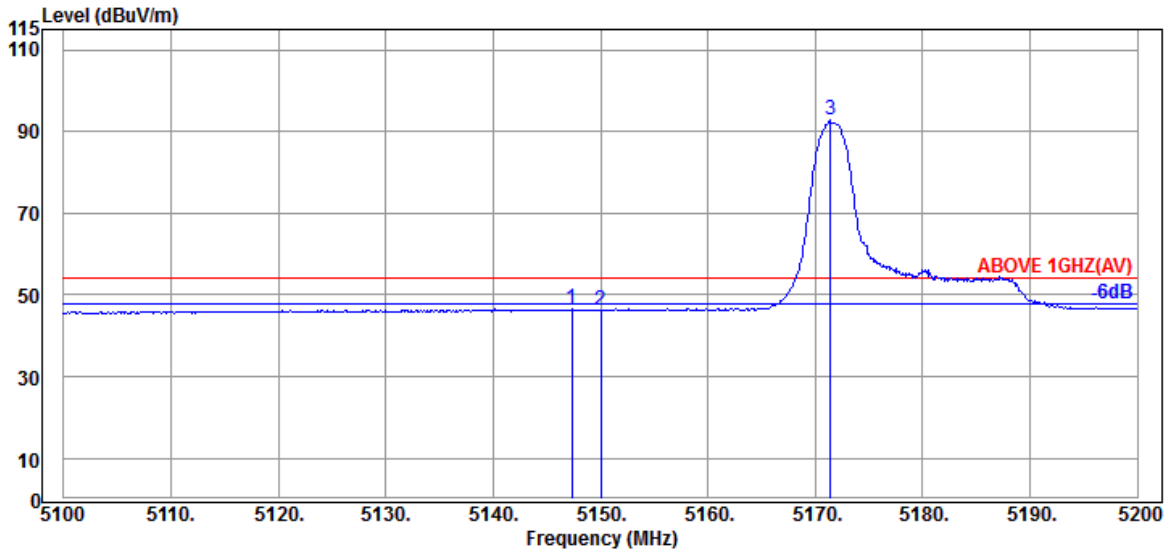


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.70	8.88	39.29	43.18	46.47	54.00	7.53	Average
5150.000	33.70	8.88	39.29	42.95	46.24	54.00	7.76	Average
@ 5171.400	33.77	8.89	39.29	89.35	92.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

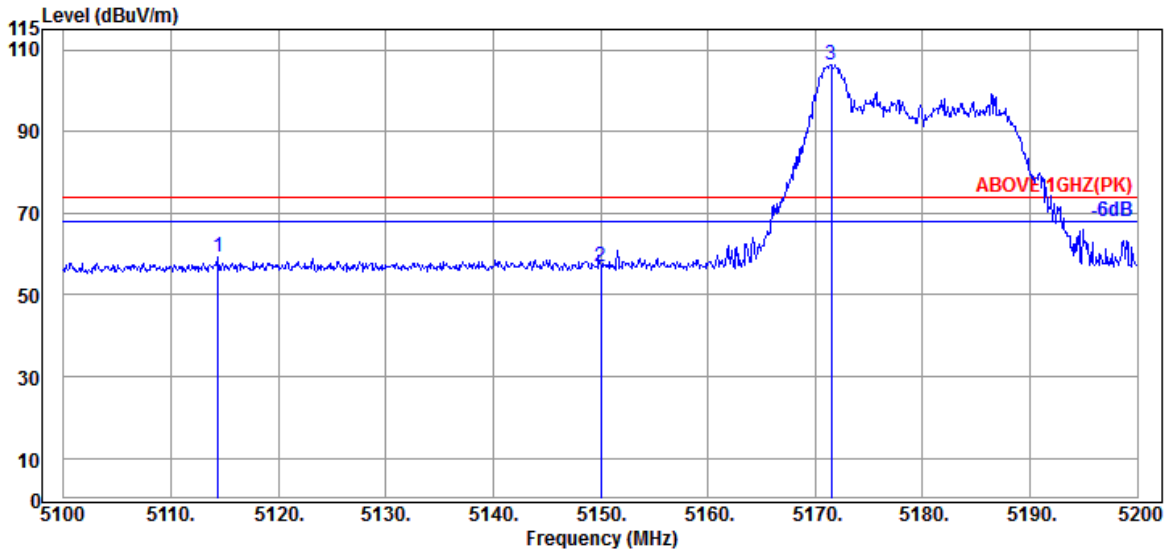

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.400	33.70	8.87	39.29	55.86	59.14	74.00	14.86	Peak
5150.000	33.70	8.88	39.29	53.59	56.88	74.00	17.12	Peak
@ 5171.500	33.77	8.89	39.29	102.94	106.31	---	---	Peak

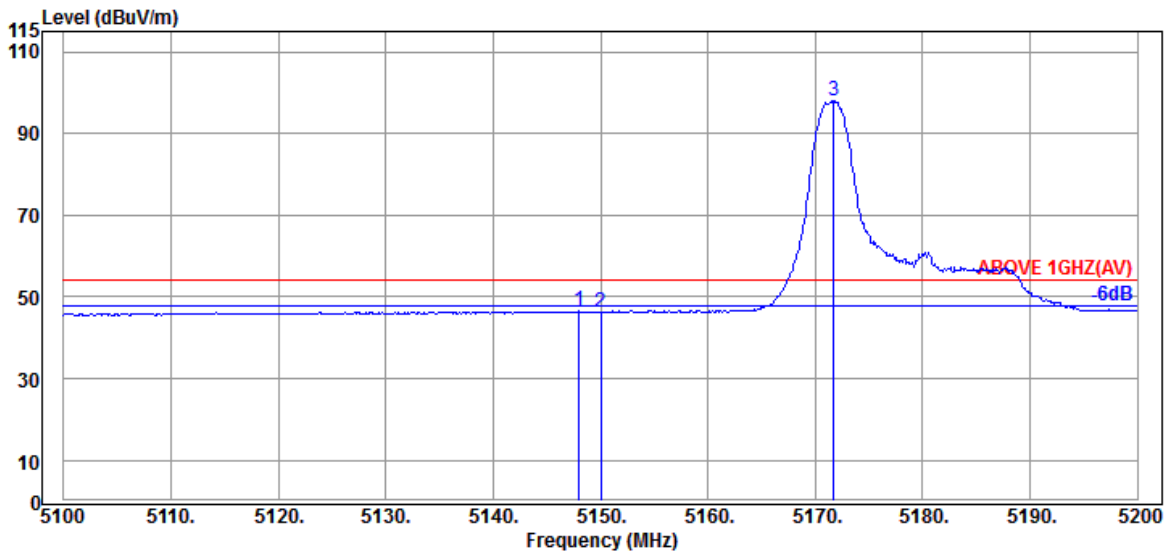


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	33.70	8.88	39.29	43.15	46.44	54.00	7.56	Average
5150.000	33.70	8.88	39.29	42.91	46.20	54.00	7.80	Average
@ 5171.700	33.83	8.90	39.29	94.72	98.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

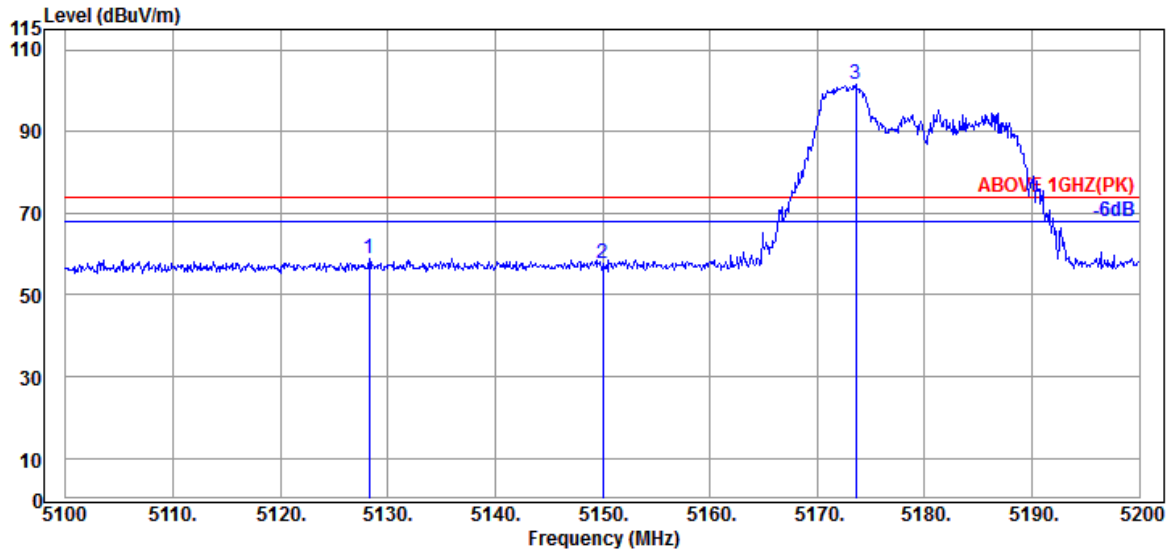

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.300	33.70	8.88	39.29	55.65	58.94	74.00	15.06	Peak
5150.000	33.70	8.88	39.29	54.46	57.75	74.00	16.25	Peak
@ 5173.600	33.83	8.90	39.28	98.31	101.76	---	---	Peak

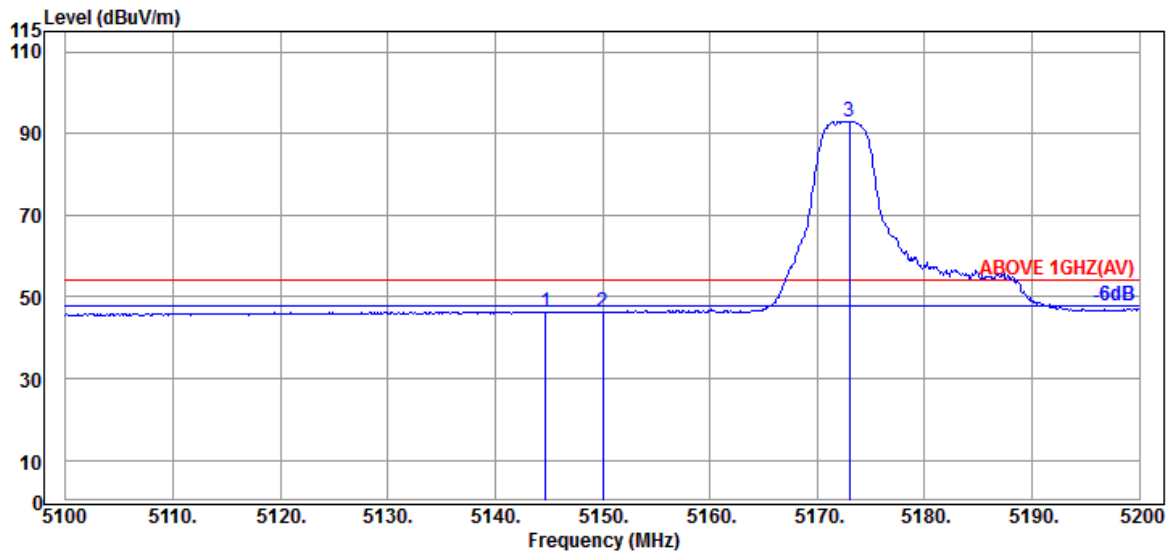


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.70	8.88	39.29	43.12	46.41	54.00	7.59	Average
5150.000	33.70	8.88	39.29	42.95	46.24	54.00	7.76	Average
@ 5173.000	33.83	8.90	39.29	89.56	93.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

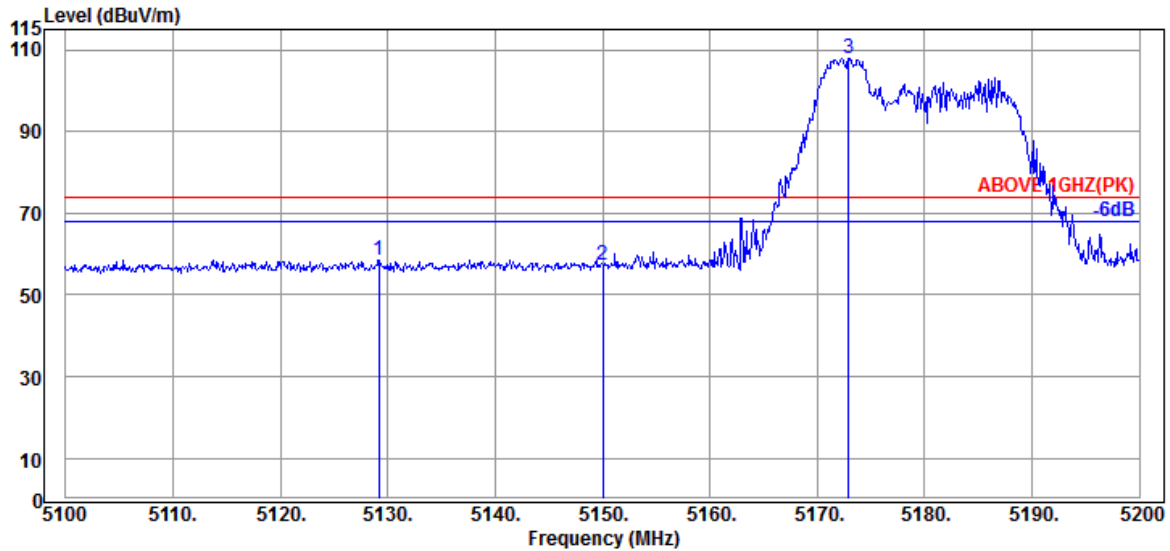

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.200	33.70	8.88	39.29	55.26	58.55	74.00	15.45	Peak
5150.000	33.70	8.88	39.29	53.98	57.27	74.00	16.73	Peak
@ 5172.900	33.83	8.90	39.29	104.50	107.94	---	---	Peak

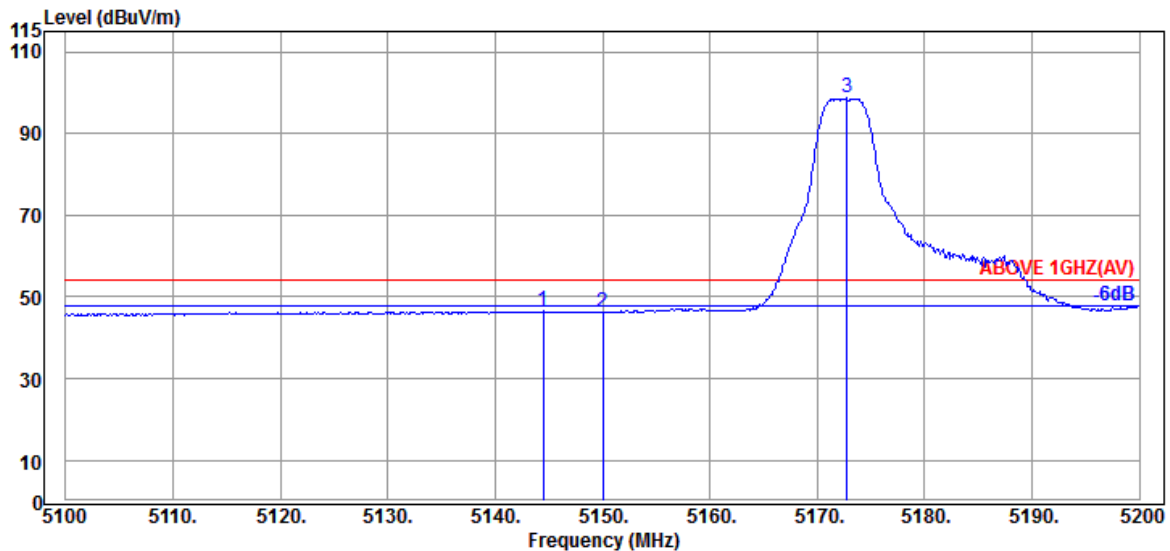


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	33.70	8.88	39.29	43.16	46.45	54.00	7.55	Average
5150.000	33.70	8.88	39.29	42.92	46.21	54.00	7.79	Average
@ 5172.800	33.83	8.90	39.29	95.42	98.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

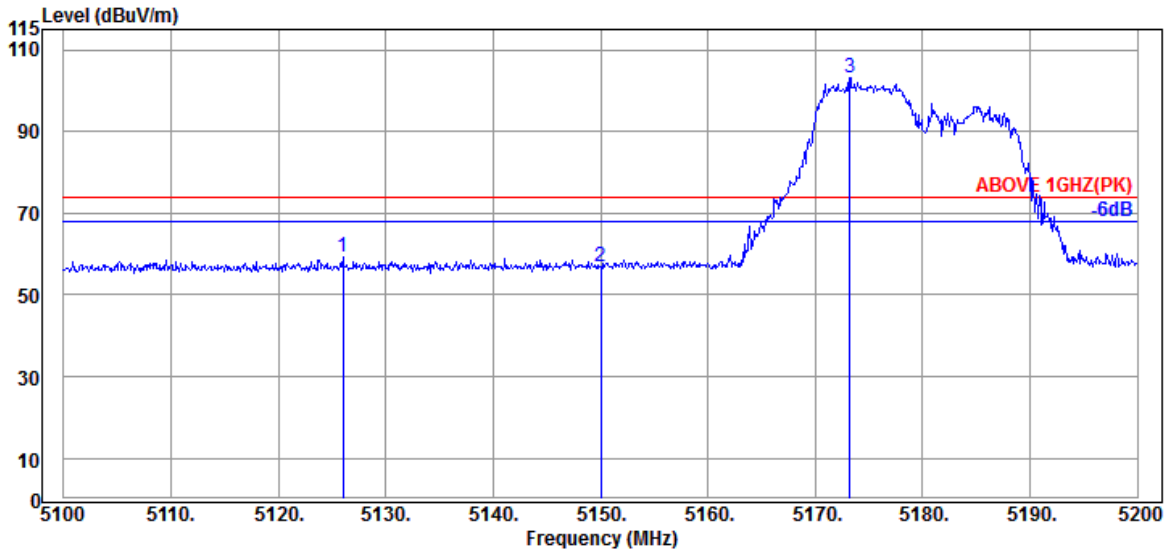

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.000	33.70	8.87	39.29	55.87	59.15	74.00	14.85	Peak
5150.000	33.70	8.88	39.29	53.48	56.77	74.00	17.23	Peak
@ 5173.200	33.83	8.90	39.28	99.88	103.33	---	---	Peak

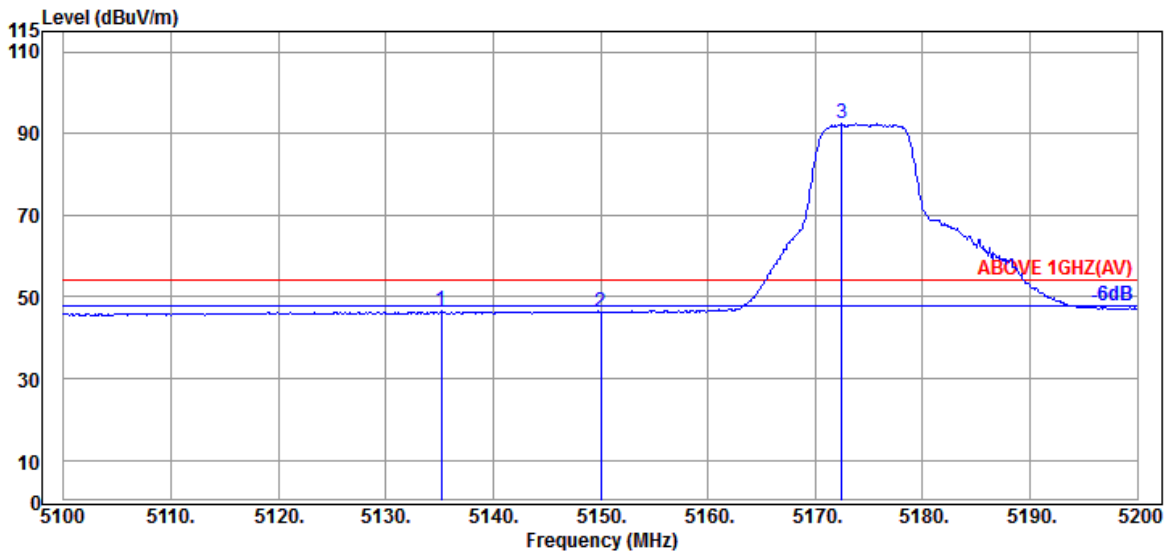


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.200	33.70	8.88	39.29	43.19	46.48	54.00	7.52	Average
5150.000	33.70	8.88	39.29	43.05	46.34	54.00	7.66	Average
@ 5172.500	33.83	8.90	39.29	88.94	92.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

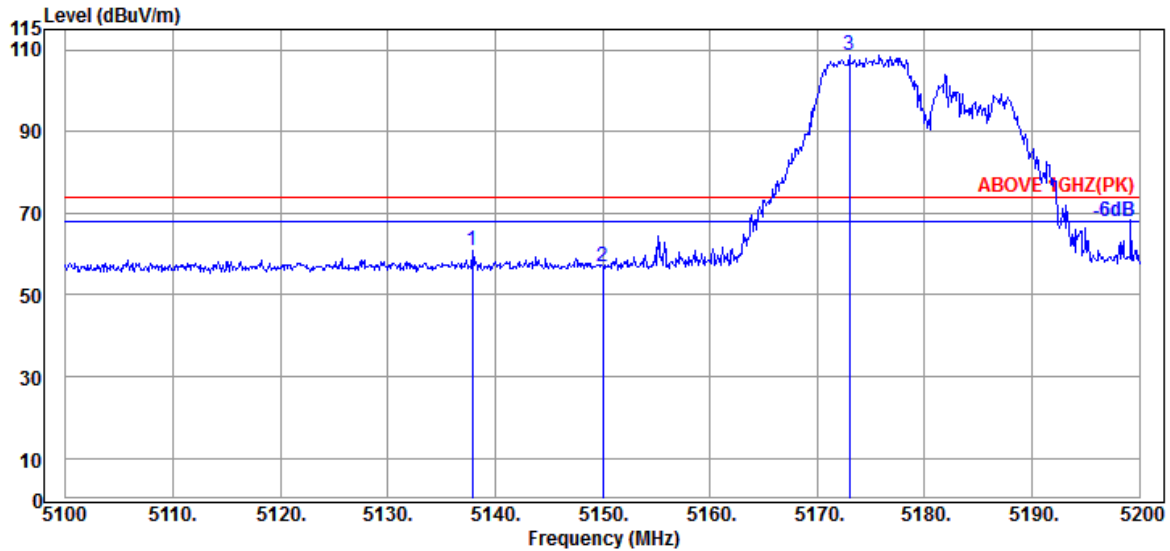

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.70	8.88	39.29	57.65	60.94	74.00	13.06	Peak
5150.000	33.70	8.88	39.29	53.48	56.77	74.00	17.23	Peak
@ 5173.000	33.83	8.90	39.29	105.20	108.64	---	---	Peak

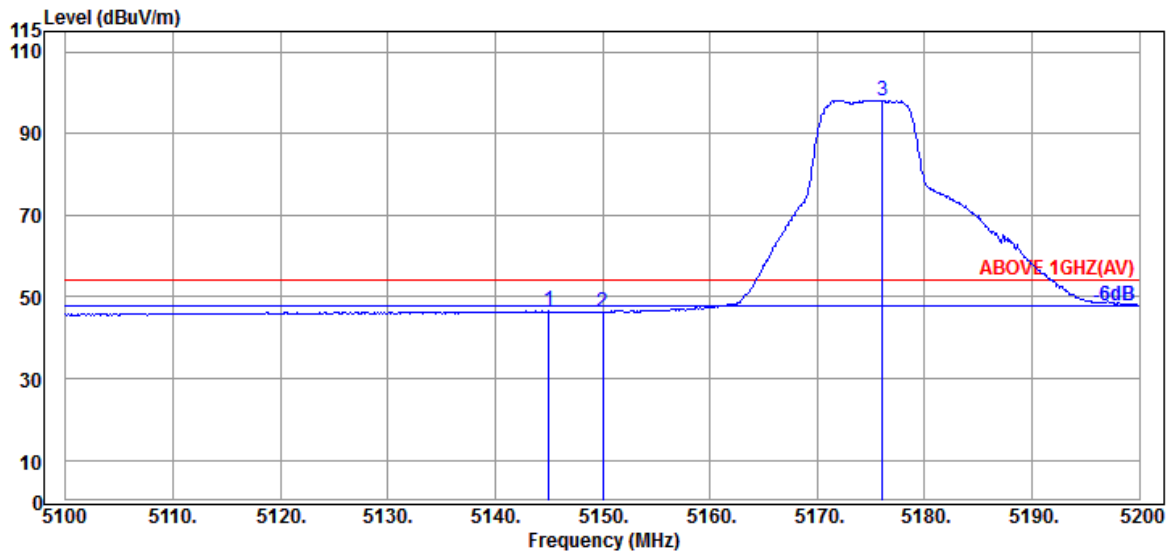


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.70	8.88	39.29	43.18	46.47	54.00	7.53	Average
5150.000	33.70	8.88	39.29	42.95	46.24	54.00	7.76	Average
@ 5176.100	33.83	8.90	39.28	94.75	98.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

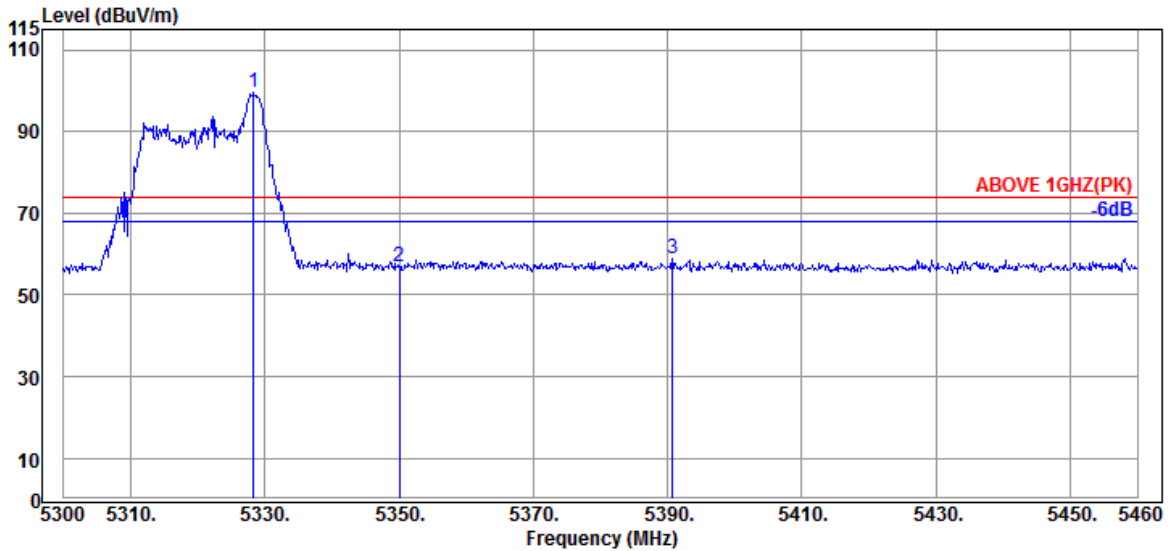

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	95.84	99.53	---	---	Peak
5350.080	34.00	8.99	39.27	53.20	56.92	74.00	17.08	Peak
5390.720	34.20	9.02	39.27	54.85	58.80	74.00	15.20	Peak

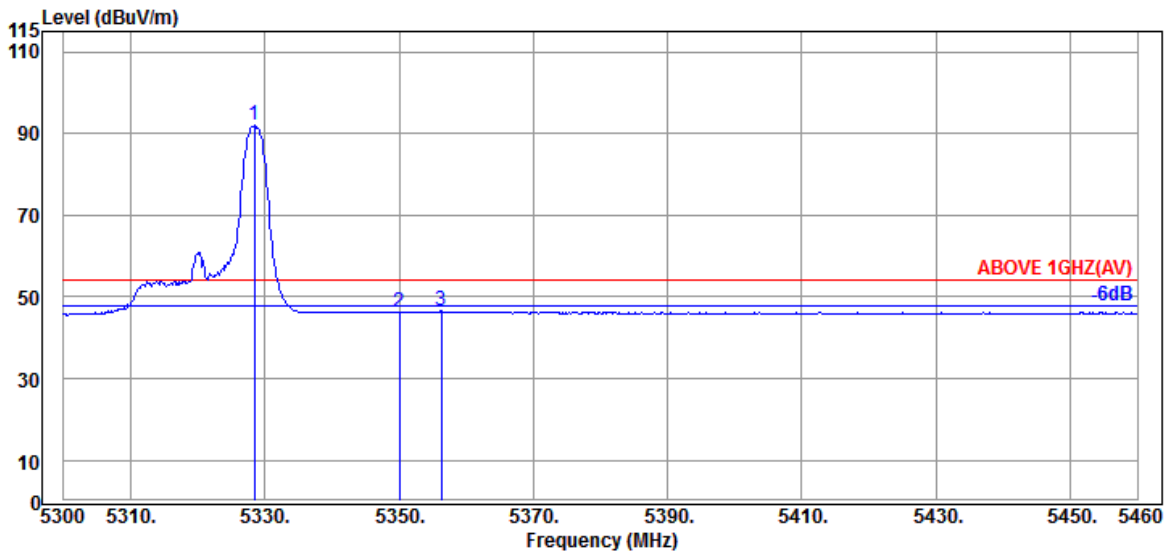


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.97	8.99	39.27	88.30	91.99	---	---	Average
5350.080	34.00	8.99	39.27	42.42	46.14	54.00	7.86	Average
5356.320	34.07	9.00	39.27	42.68	46.48	54.00	7.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

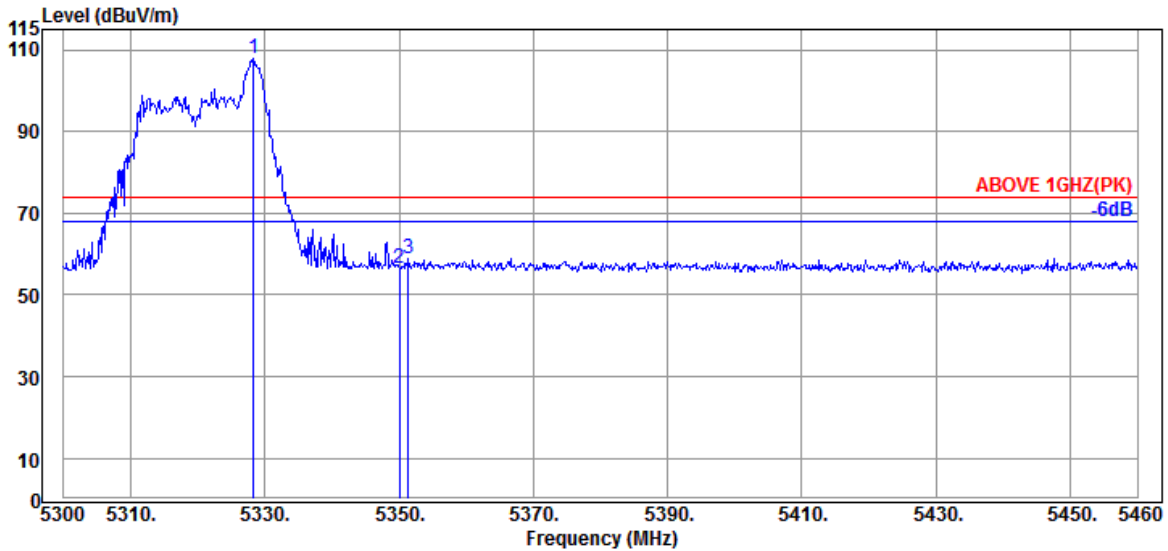

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	104.32	108.01	---	---	Peak
5350.080	34.00	8.99	39.27	52.84	56.56	74.00	17.44	Peak
5351.360	34.00	8.99	39.27	55.07	58.79	74.00	15.21	Peak

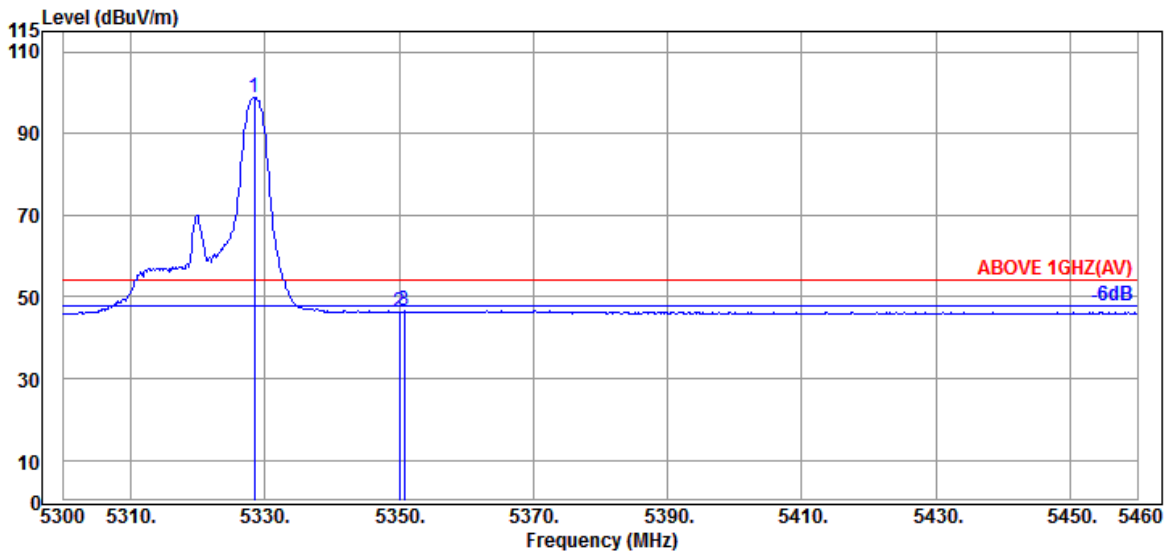


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.97	8.99	39.27	95.04	98.73	---	---	Average
5350.080	34.00	8.99	39.27	42.55	46.27	54.00	7.73	Average
5350.720	34.00	8.99	39.27	42.78	46.50	54.00	7.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

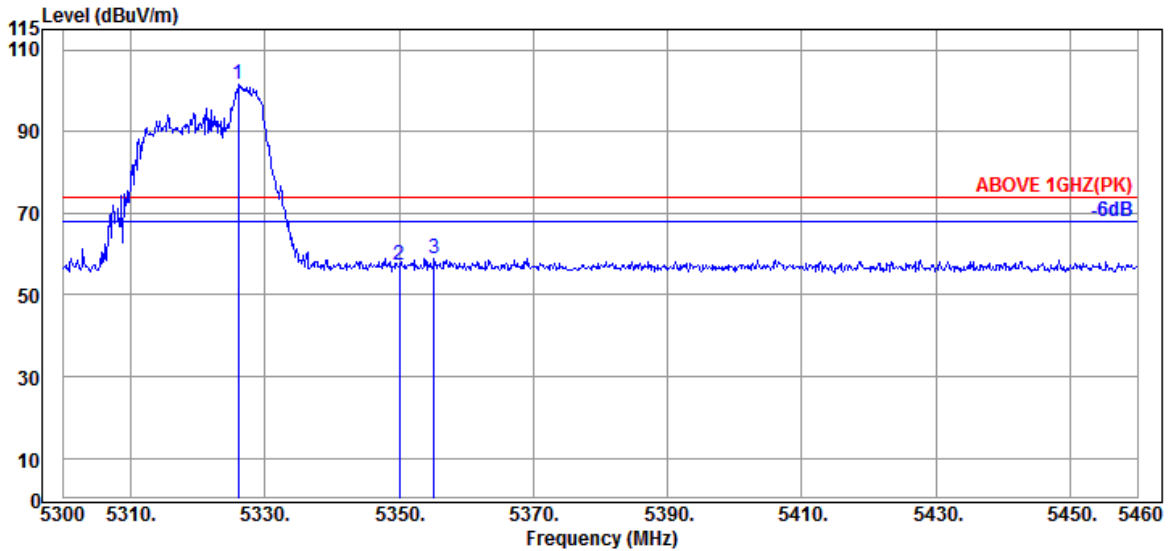

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.080	33.97	8.99	39.27	97.70	101.39	---	---	Peak
5350.080	34.00	8.99	39.27	53.45	57.17	74.00	16.83	Peak
5355.200	34.07	9.00	39.27	55.16	58.96	74.00	15.04	Peak

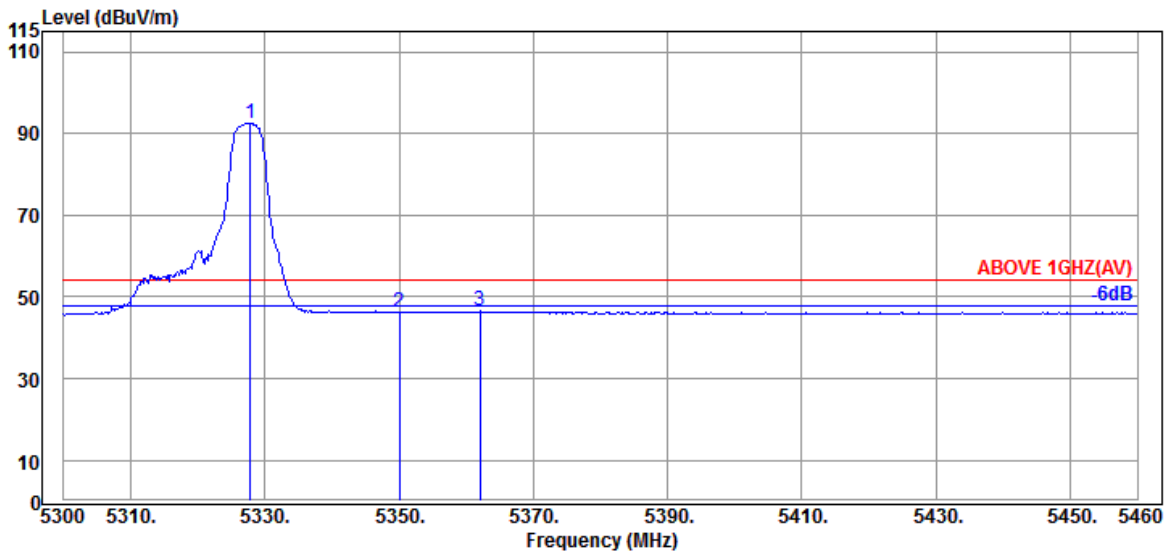


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.97	8.99	39.27	88.78	92.47	---	---	Average
5350.080	34.00	8.99	39.27	42.52	46.24	54.00	7.76	Average
5362.080	34.07	9.00	39.27	42.64	46.44	54.00	7.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

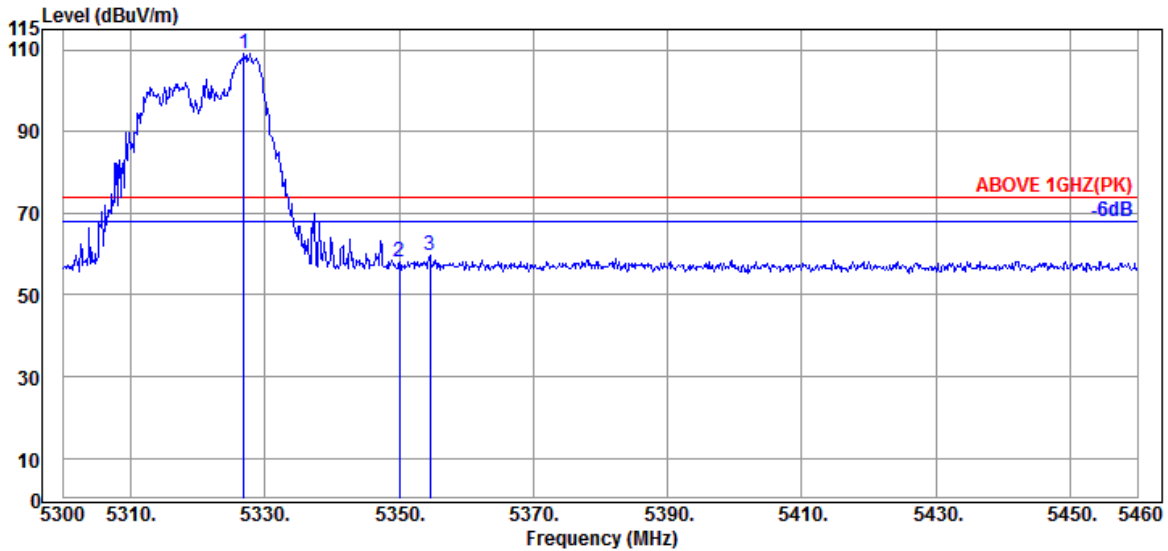

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	33.97	8.99	39.27	105.42	109.11	---	---	Peak
5350.080	34.00	8.99	39.27	54.38	58.10	74.00	15.90	Peak
5354.560	34.07	9.00	39.27	55.68	59.48	74.00	14.52	Peak

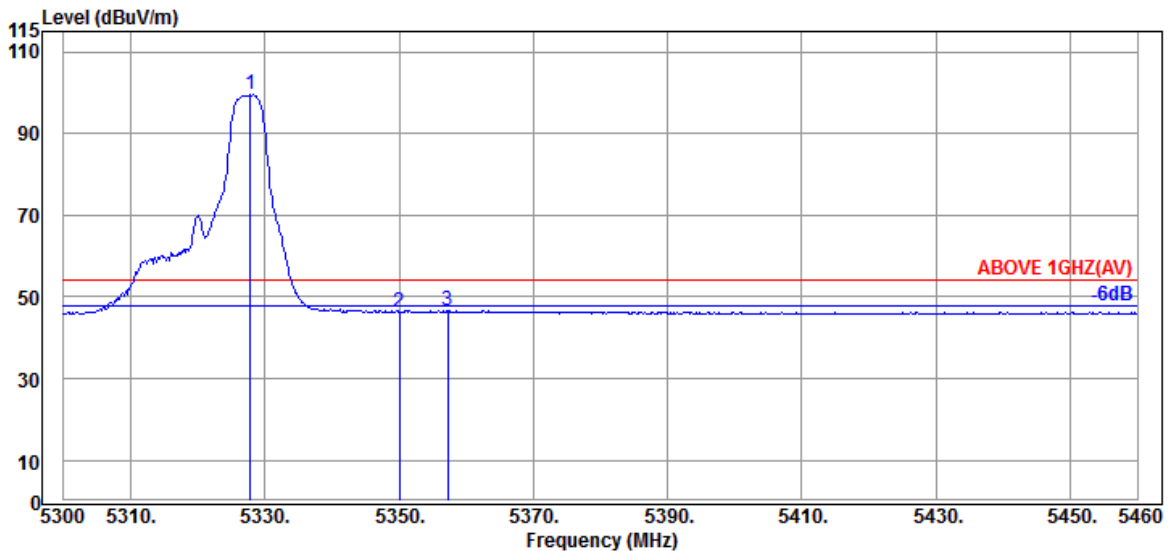


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.97	8.99	39.27	95.83	99.52	---	---	Average
5350.080	34.00	8.99	39.27	42.53	46.25	54.00	7.75	Average
5357.280	34.07	9.00	39.27	42.78	46.58	54.00	7.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

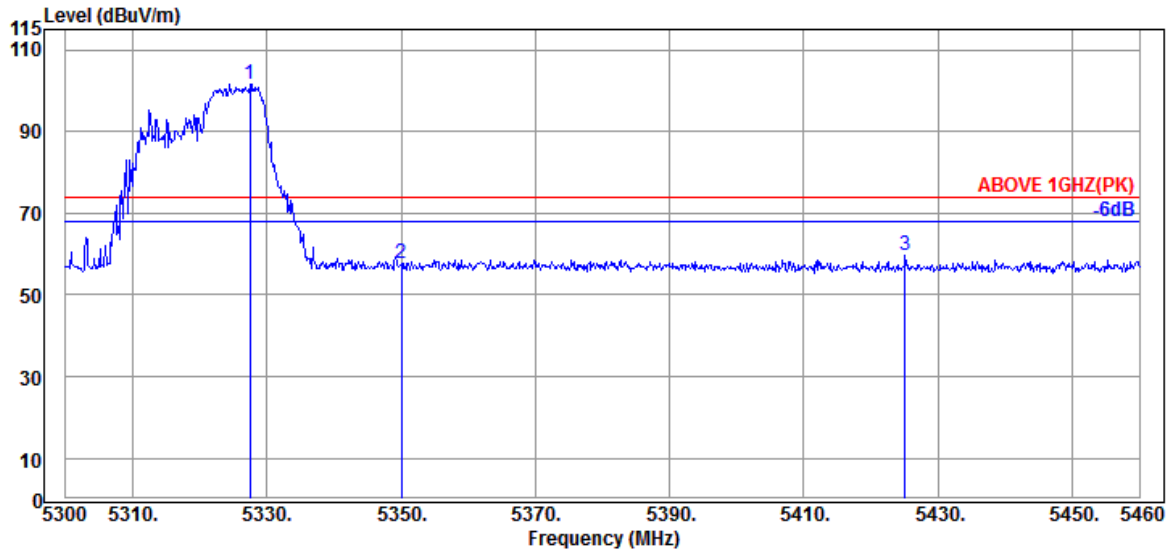

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	33.97	8.99	39.27	97.89	101.58	---	---	Peak
5350.080	34.00	8.99	39.27	54.13	57.85	74.00	16.15	Peak
5425.120	34.20	9.04	39.27	55.69	59.66	74.00	14.34	Peak

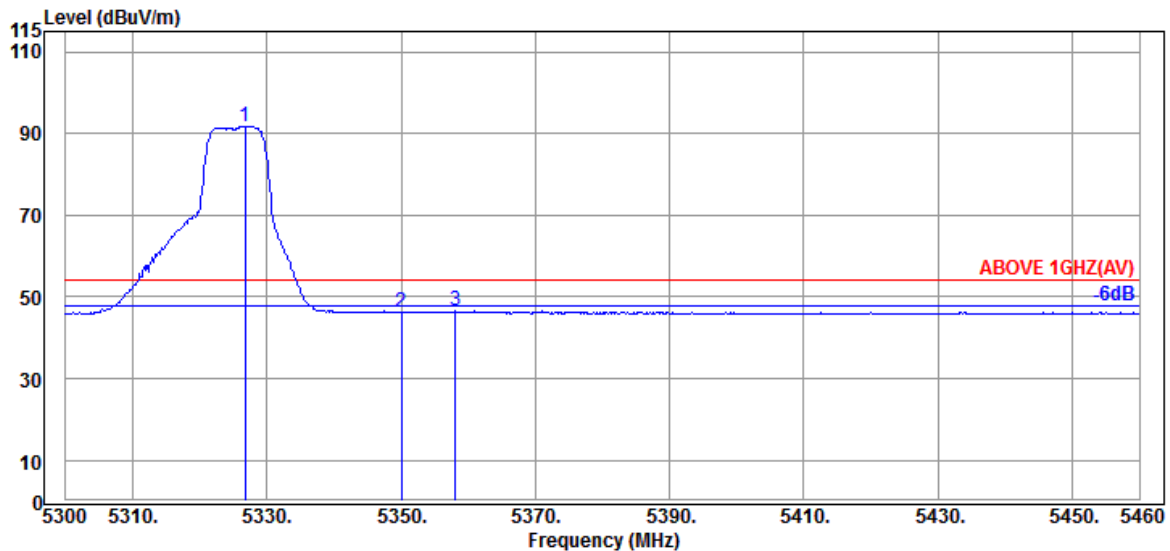


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	33.97	8.99	39.27	88.15	91.84	---	---	Average
5350.080	34.00	8.99	39.27	42.50	46.22	54.00	7.78	Average
5358.080	34.07	9.00	39.27	42.68	46.48	54.00	7.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

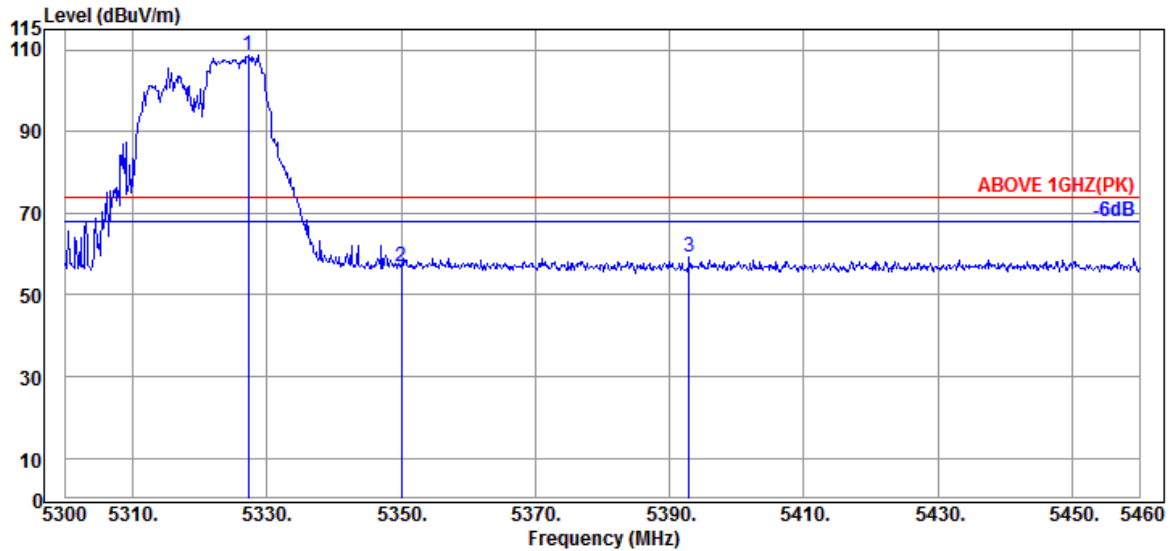

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.97	8.99	39.27	104.99	108.68	---	---	Peak
5350.080	34.00	8.99	39.27	53.02	56.74	74.00	17.26	Peak
5392.960	34.20	9.02	39.27	55.22	59.17	74.00	14.83	Peak

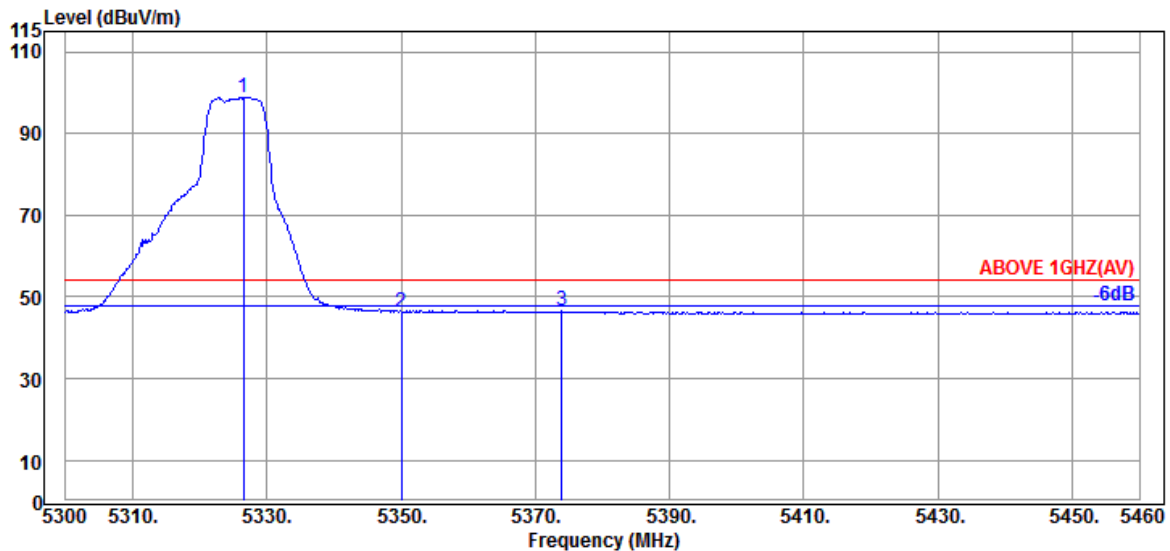


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	33.97	8.99	39.27	95.16	98.85	---	---	Average
5350.080	34.00	8.99	39.27	42.67	46.39	54.00	7.61	Average
5373.920	34.13	9.01	39.27	42.80	46.67	54.00	7.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

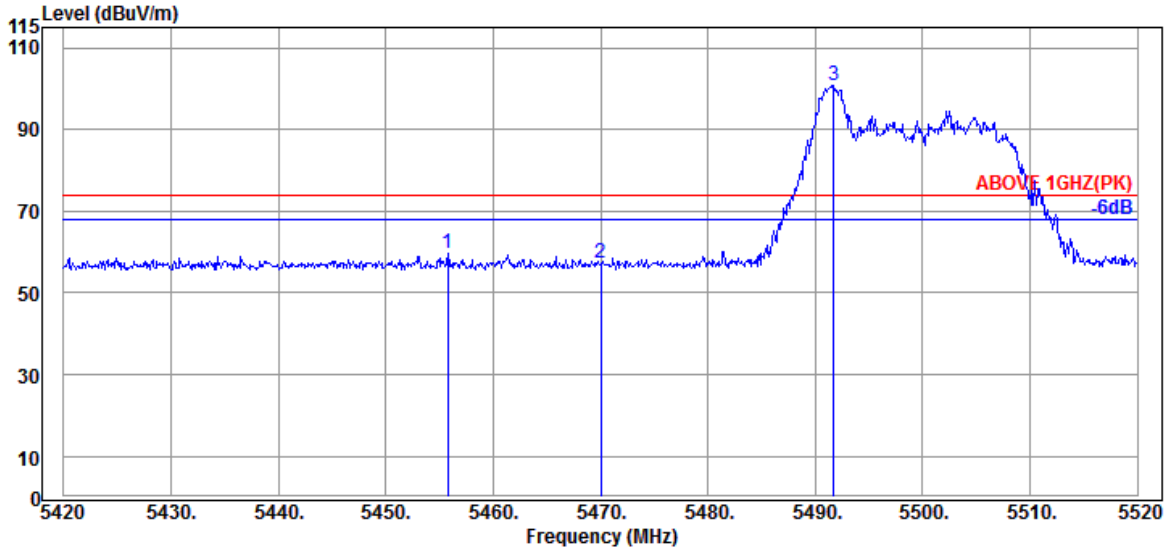

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.20	9.05	39.26	55.69	59.68	74.00	14.32	Peak
5470.000	34.17	9.06	39.26	53.36	57.33	74.00	16.67	Peak
@ 5491.700	34.13	9.07	39.26	96.73	100.67	---	---	Peak

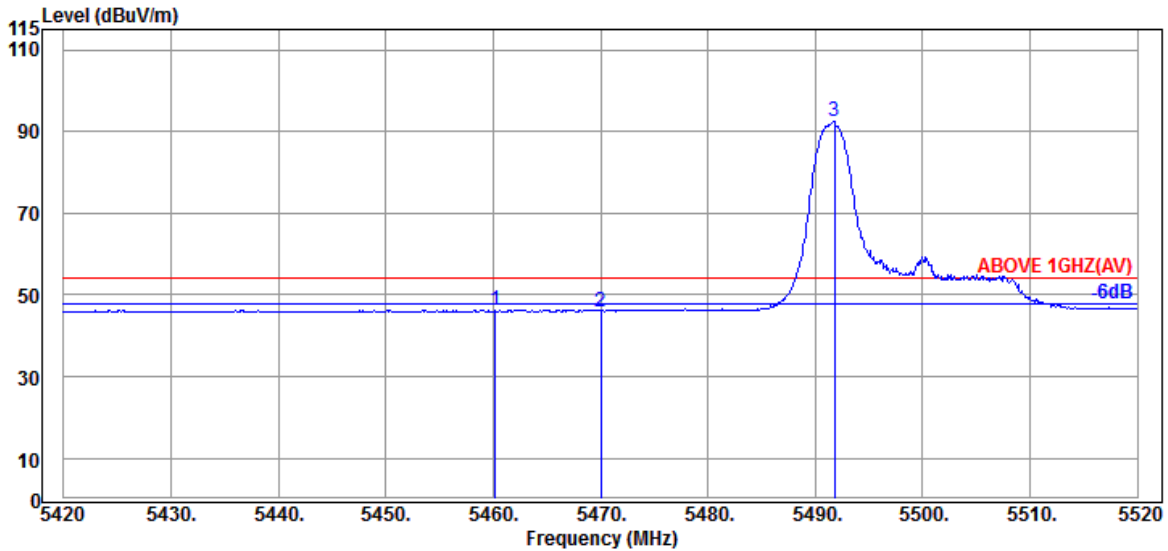


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.20	9.05	39.26	42.27	46.26	54.00	7.74	Average
5470.000	34.17	9.06	39.26	42.01	45.98	54.00	8.02	Average
@ 5491.800	34.13	9.07	39.26	88.55	92.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

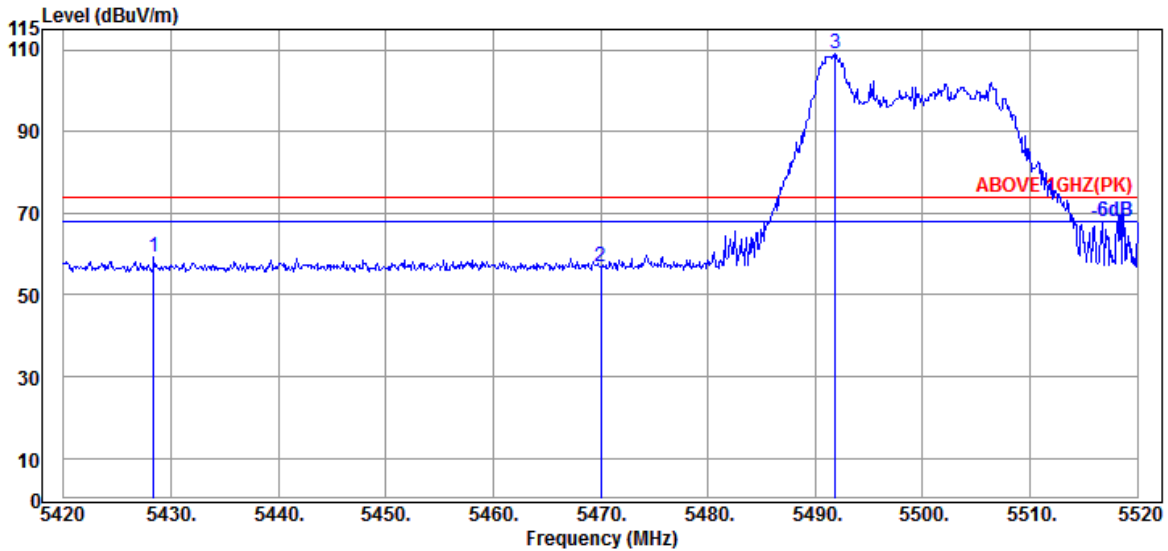

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.400	34.20	9.04	39.27	55.32	59.29	74.00	14.71	Peak
5470.000	34.17	9.06	39.26	52.81	56.78	74.00	17.22	Peak
@ 5491.900	34.13	9.07	39.26	104.99	108.93	---	---	Peak

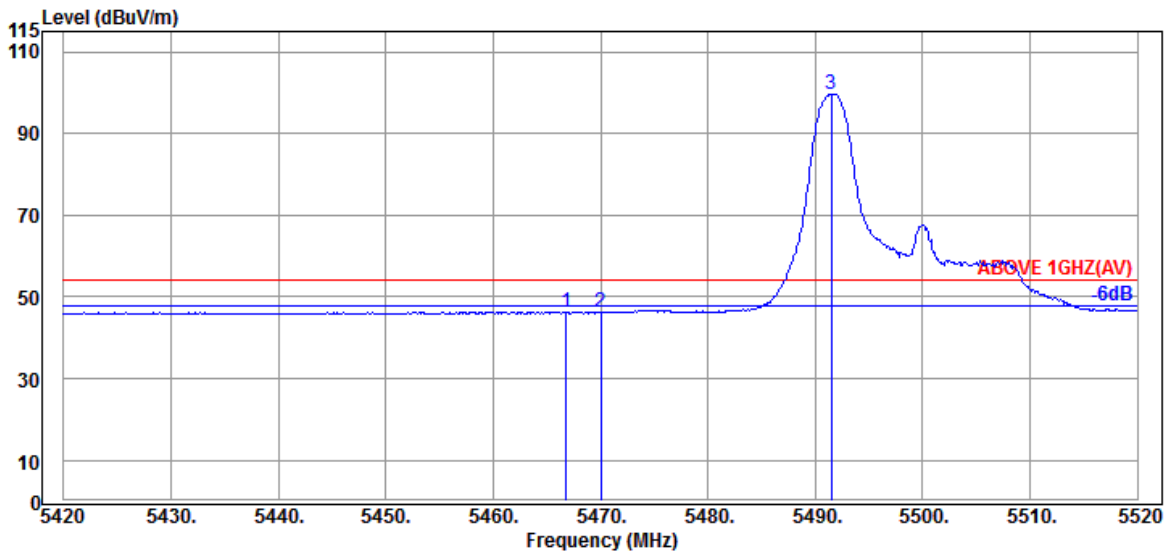


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.17	9.06	39.26	42.34	46.31	54.00	7.69	Average
5470.000	34.17	9.06	39.26	42.22	46.19	54.00	7.81	Average
@ 5491.500	34.13	9.07	39.26	95.77	99.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

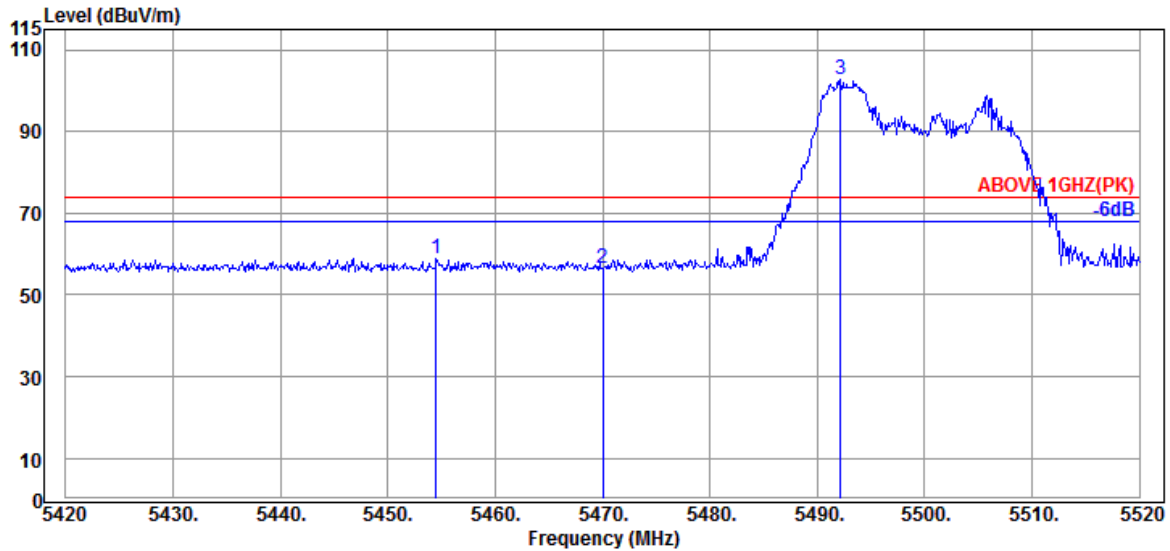

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.20	9.05	39.26	54.88	58.87	74.00	15.13	Peak
5470.000	34.17	9.06	39.26	52.65	56.62	74.00	17.38	Peak
@ 5492.200	34.13	9.07	39.26	98.79	102.73	---	---	Peak

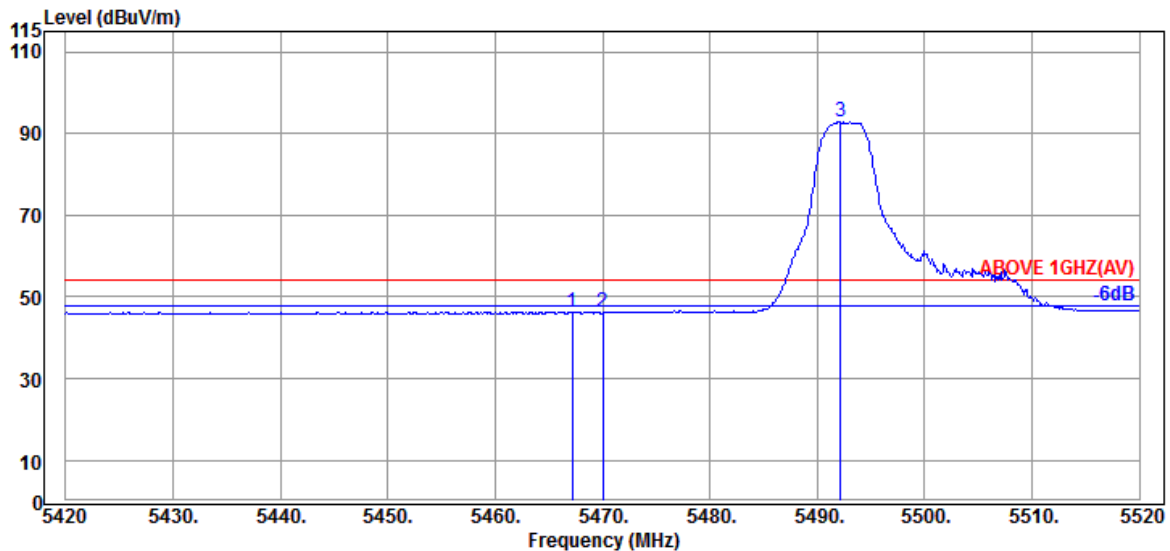


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.17	9.06	39.26	42.27	46.24	54.00	7.76	Average
5470.000	34.17	9.06	39.26	42.28	46.25	54.00	7.75	Average
@ 5492.200	34.13	9.07	39.26	88.89	92.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

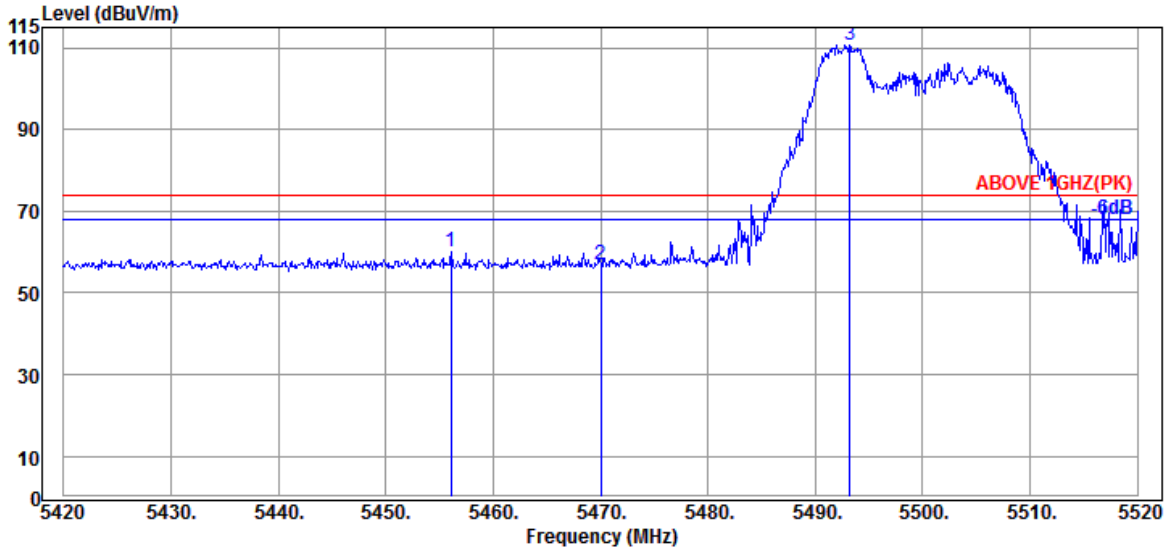

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.20	9.05	39.26	56.26	60.25	74.00	13.75	Peak
5470.000	34.17	9.06	39.26	53.12	57.09	74.00	16.91	Peak
@ 5493.200	34.13	9.07	39.26	106.72	110.66	---	---	Peak

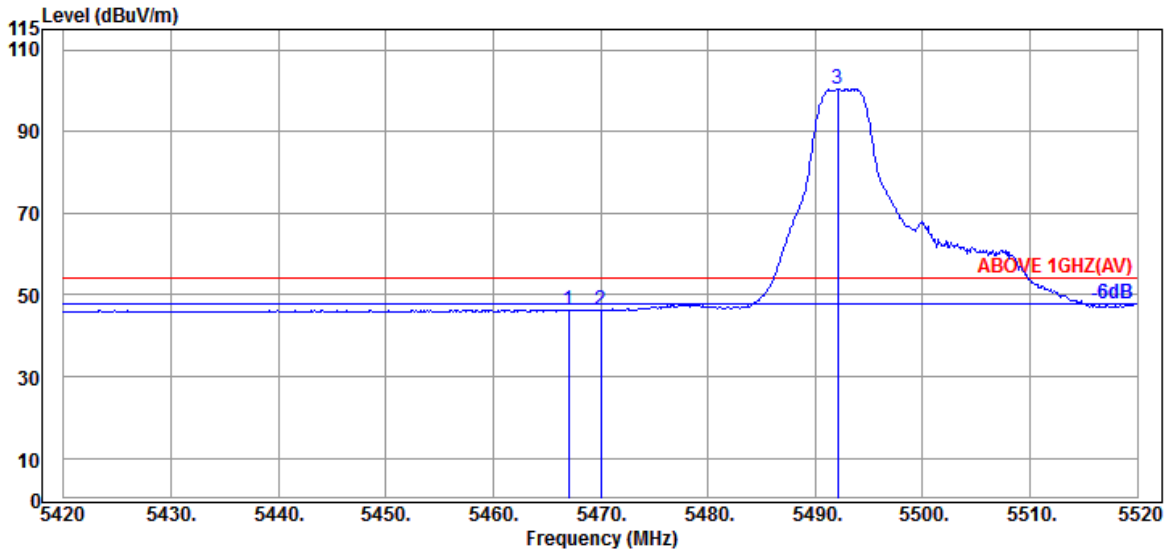


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.17	9.06	39.26	42.36	46.33	54.00	7.67	Average
5470.000	34.17	9.06	39.26	42.13	46.10	54.00	7.90	Average
@ 5492.100	34.13	9.07	39.26	96.57	100.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

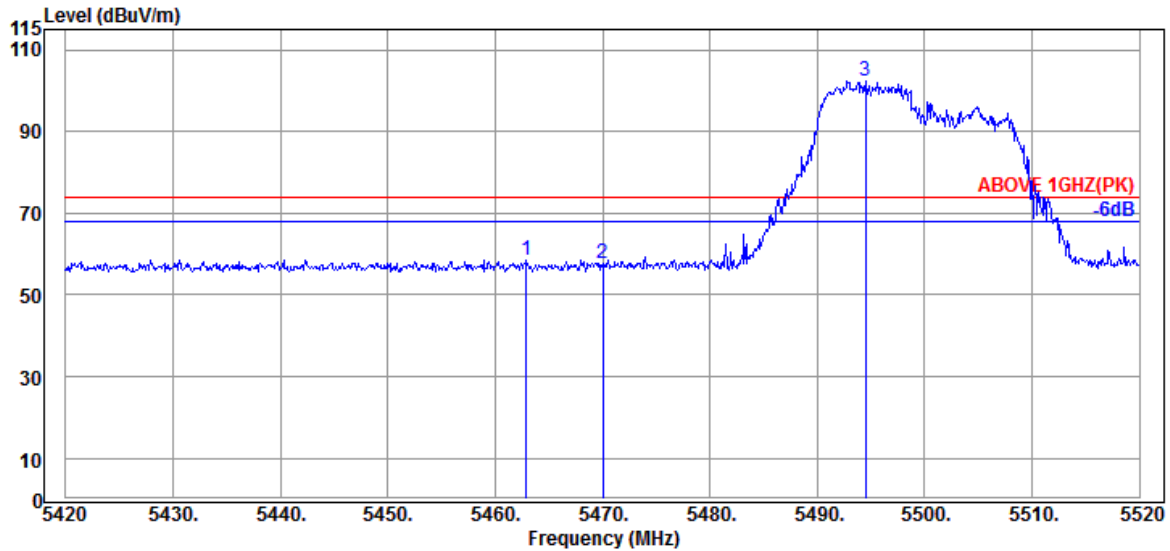

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.900	34.20	9.05	39.26	54.53	58.52	74.00	15.48	Peak
5470.000	34.17	9.06	39.26	53.62	57.59	74.00	16.41	Peak
@ 5494.500	34.13	9.07	39.26	98.30	102.24	---	---	Peak

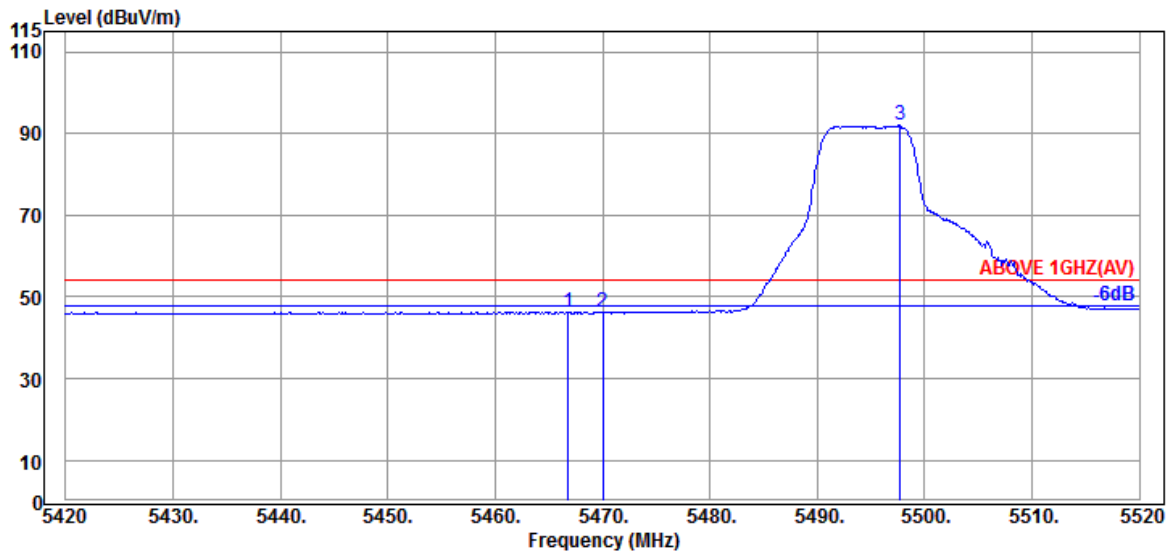


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.17	9.06	39.26	42.25	46.22	54.00	7.78	Average
5470.000	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
@ 5497.700	34.10	9.08	39.26	88.04	91.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

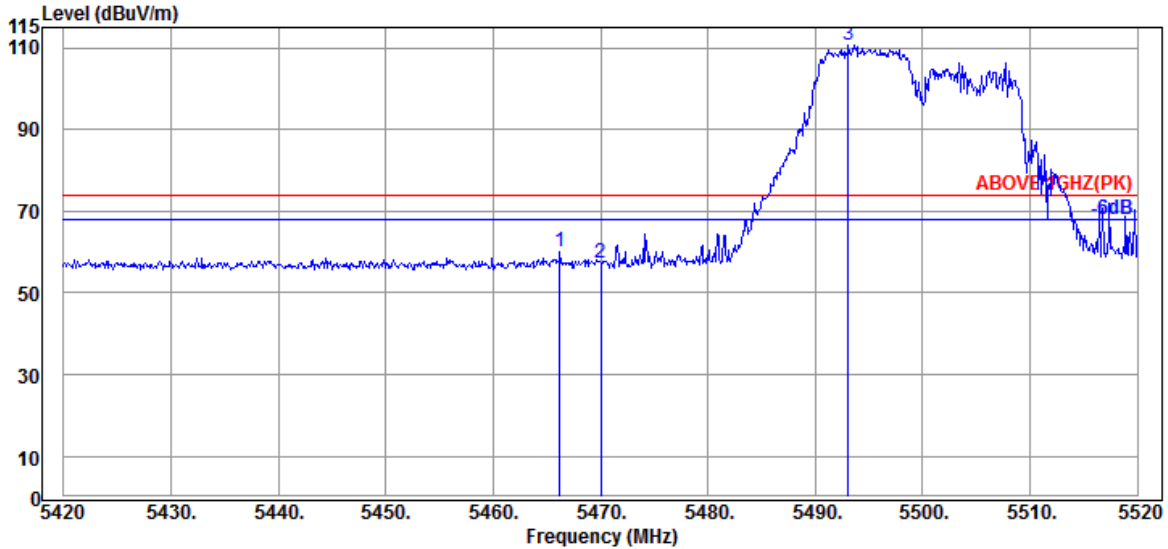

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	9.06	39.26	56.01	59.98	74.00	14.02	Peak
5470.000	34.17	9.06	39.26	53.28	57.25	74.00	16.75	Peak
@ 5493.100	34.13	9.07	39.26	106.59	110.53	---	---	Peak

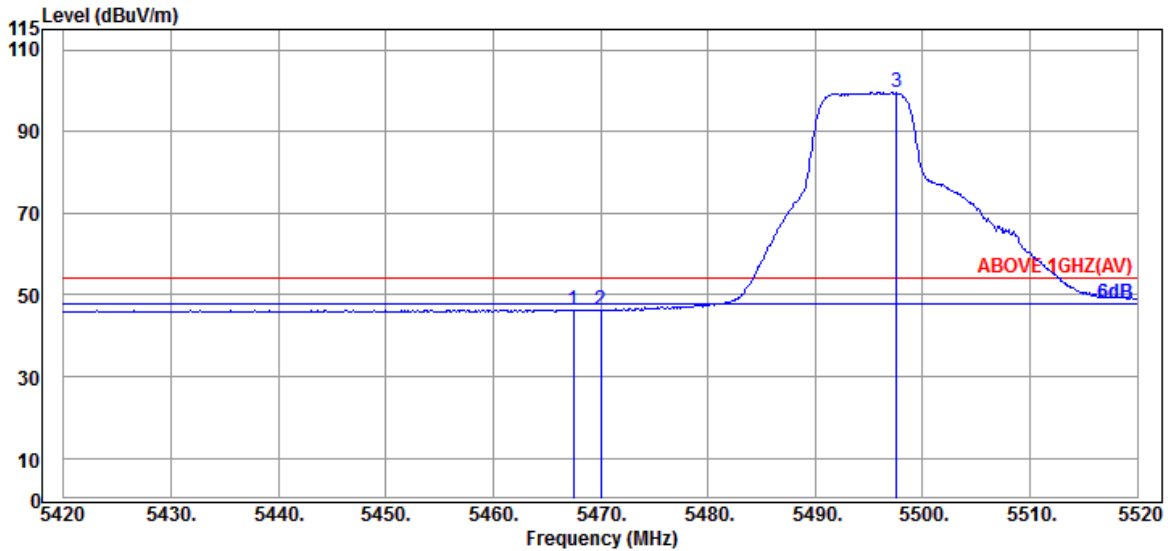


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.17	9.06	39.26	42.44	46.41	54.00	7.59	Average
5470.000	34.17	9.06	39.26	42.46	46.43	54.00	7.57	Average
@ 5497.600	34.10	9.08	39.26	95.64	99.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

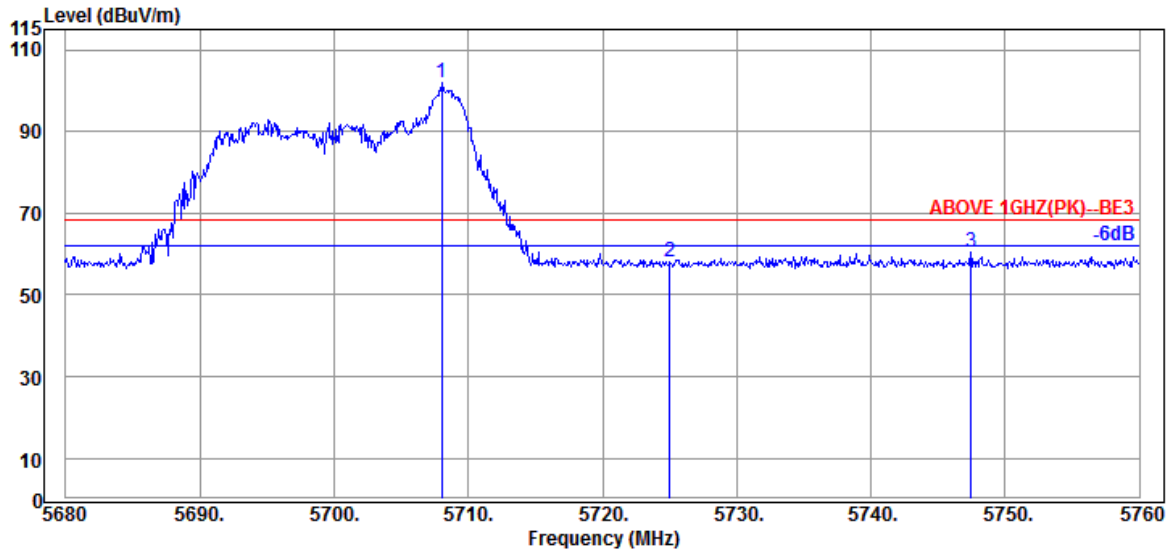

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.90	9.19	39.30	98.16	101.95	---	---	Peak
5725.040	33.90	9.20	39.30	54.25	58.05	68.20	10.15	Peak
5747.440	33.90	9.20	39.31	56.59	60.38	68.20	7.82	Peak

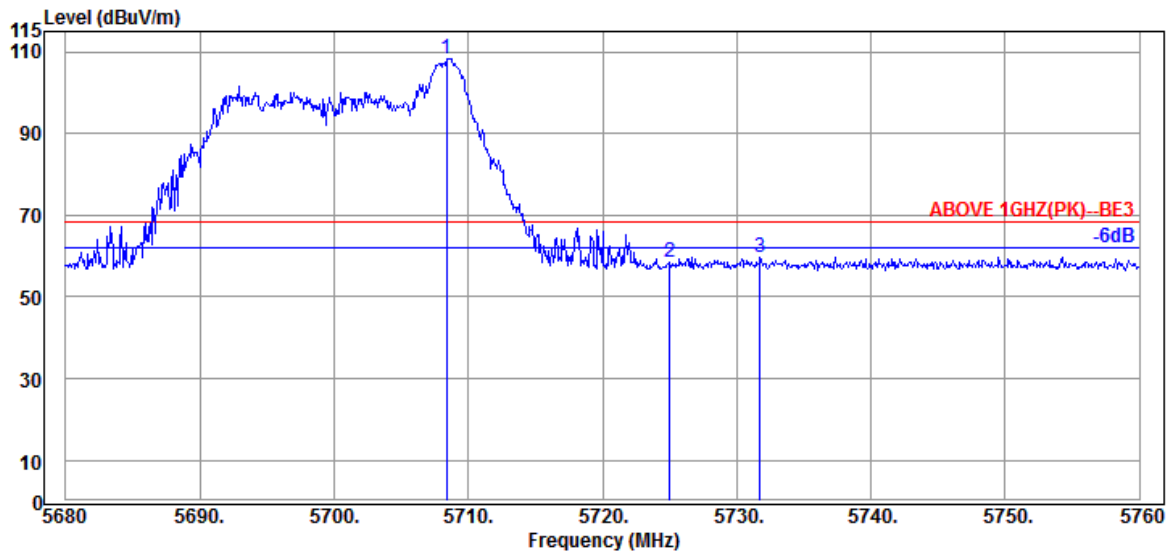


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	33.90	9.19	39.30	104.66	108.45	---	---	Peak
5725.040	33.90	9.20	39.30	54.82	58.62	68.20	9.58	Peak
5731.760	33.90	9.20	39.31	56.01	59.80	68.20	8.40	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

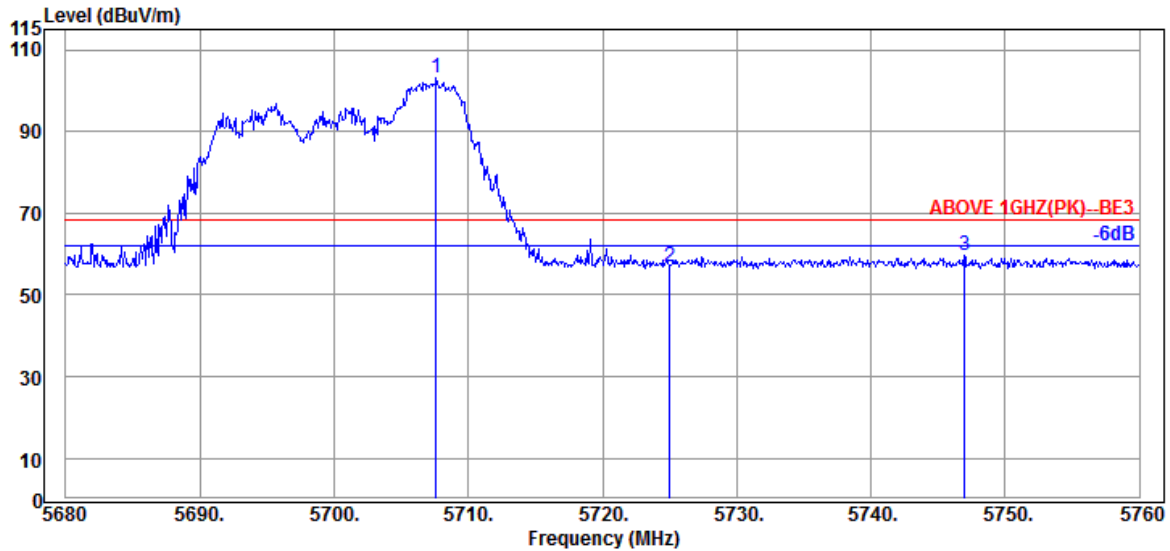

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.600	33.90	9.19	39.30	99.17	102.96	---	---	Peak
5725.040	33.90	9.20	39.30	53.26	57.06	68.20	11.14	Peak
5746.960	33.90	9.20	39.31	55.76	59.55	68.20	8.65	Peak

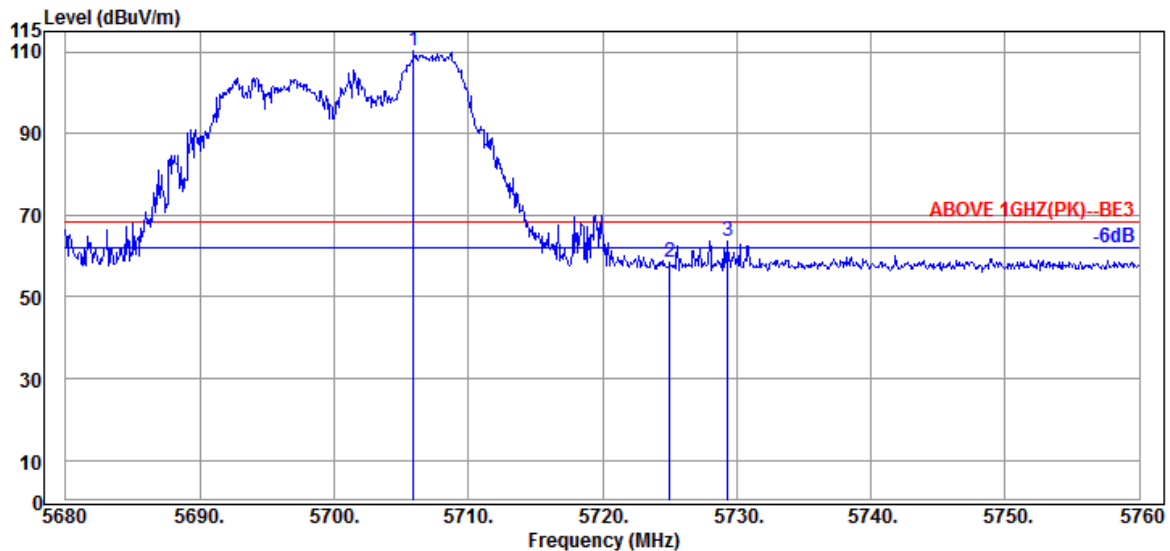


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.920	33.90	9.19	39.30	106.57	110.36	---	---	Peak
5725.040	33.90	9.20	39.30	54.64	58.44	68.20	9.76	Peak
5729.360	33.90	9.20	39.31	59.89	63.68	68.20	4.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

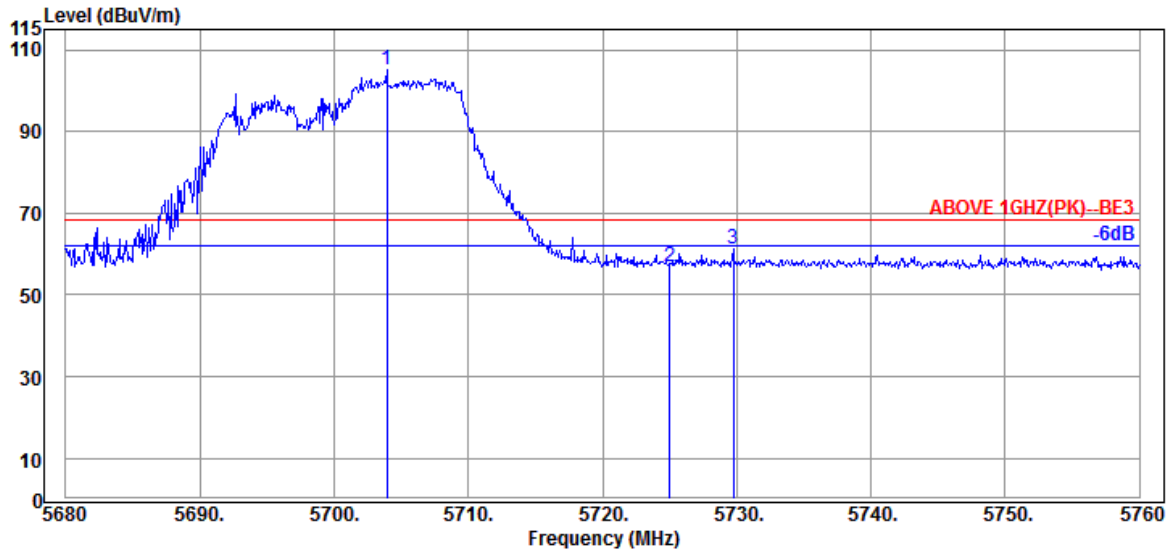

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.920	33.90	9.18	39.30	101.25	105.03	---	---	Peak
5725.040	33.90	9.20	39.30	53.24	57.04	68.20	11.16	Peak
5729.760	33.90	9.20	39.31	57.47	61.26	68.20	6.94	Peak

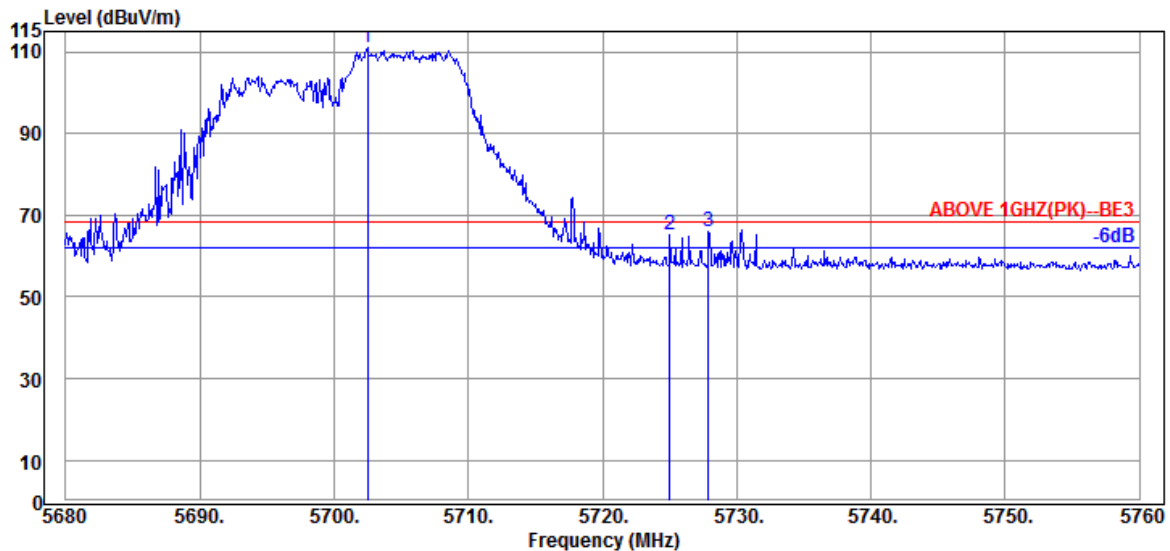


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.480	33.90	9.18	39.30	107.37	111.15	---	---	Peak
5725.040	33.90	9.20	39.30	61.53	65.33	68.20	2.87	Peak
5727.920	33.90	9.20	39.31	62.03	65.82	68.20	2.38	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

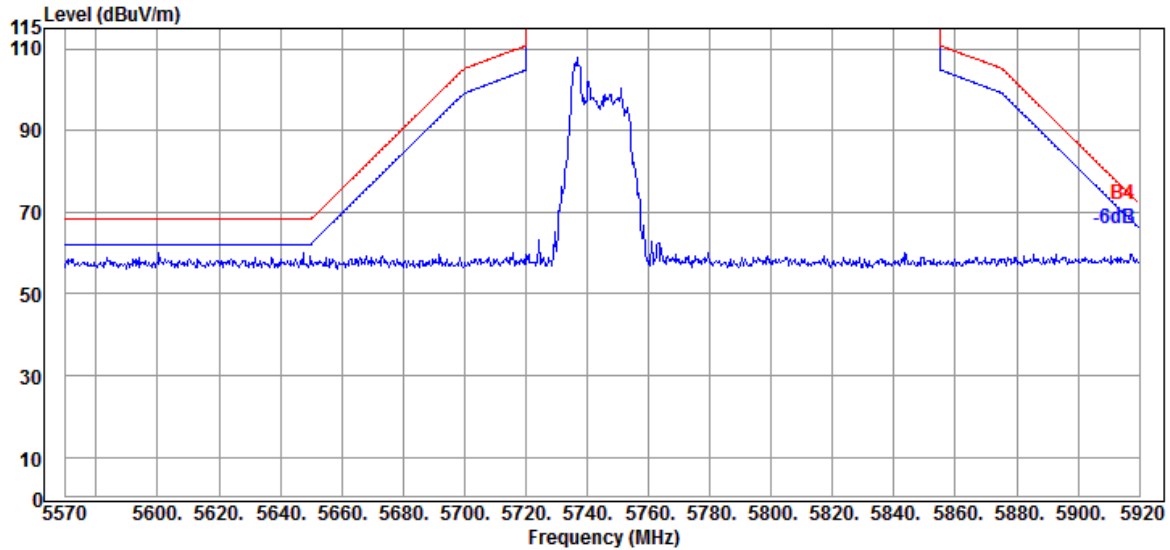


Antenna at Vertical Polarization

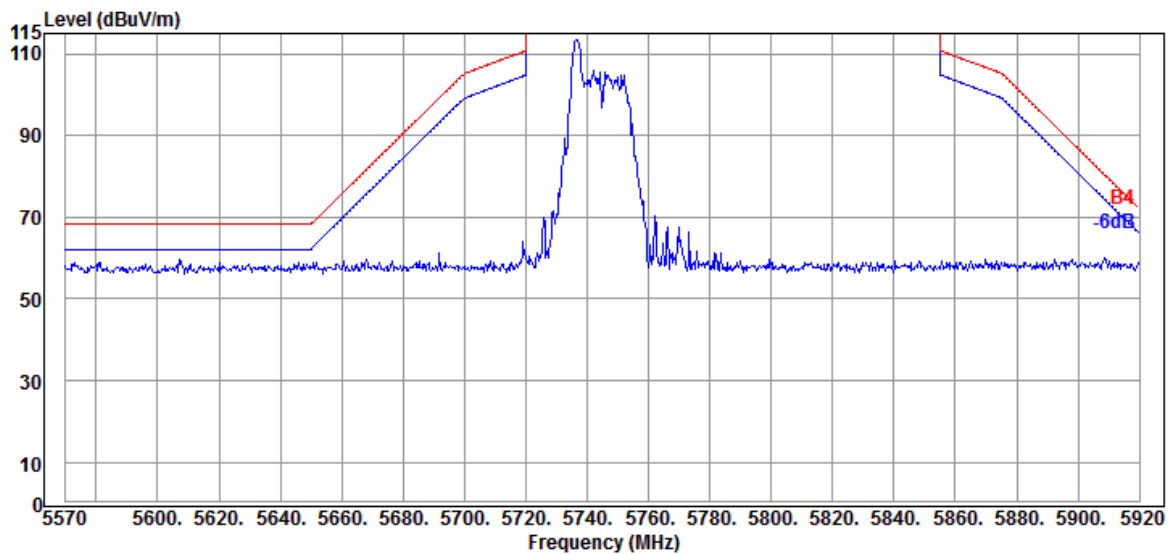


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

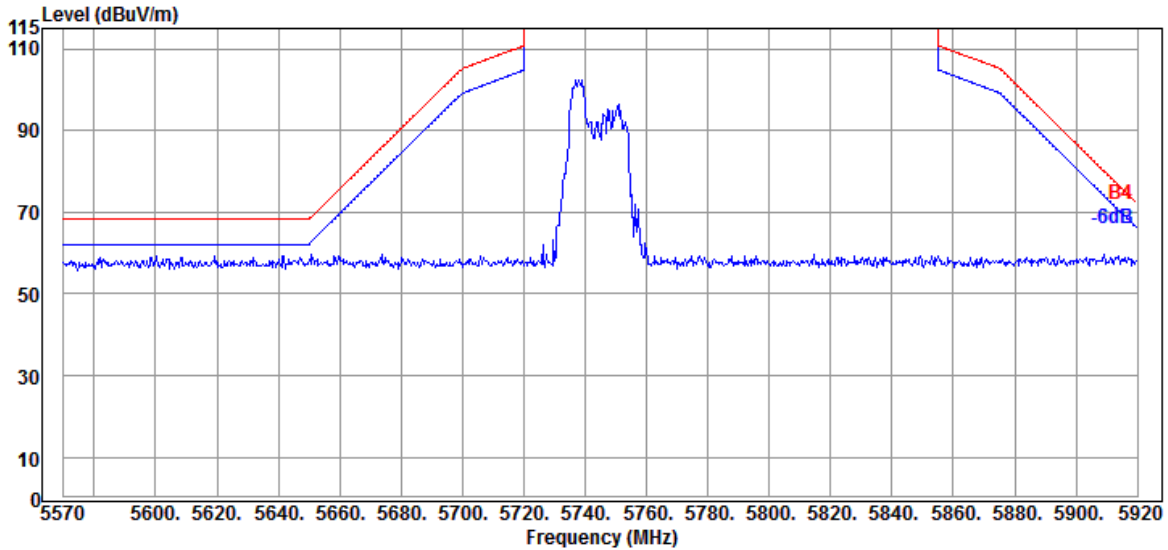


Antenna at Vertical Polarization

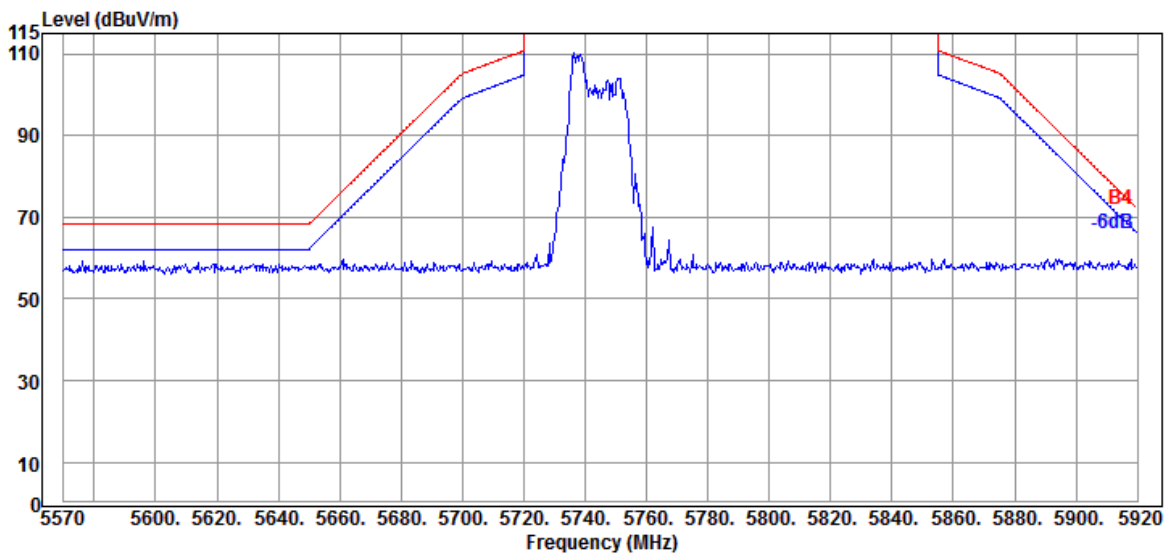


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

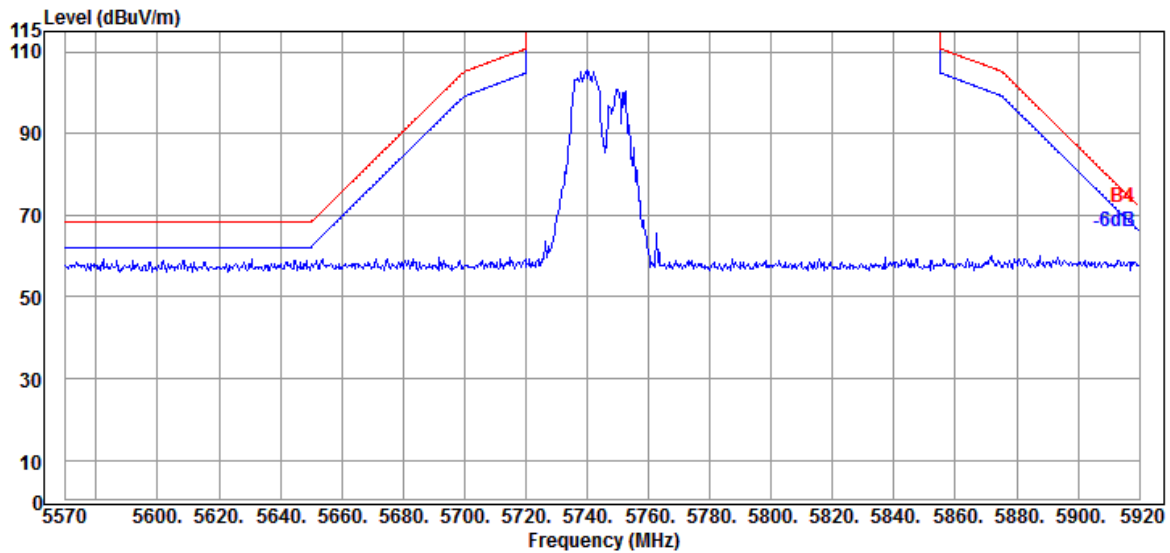


Antenna at Vertical Polarization

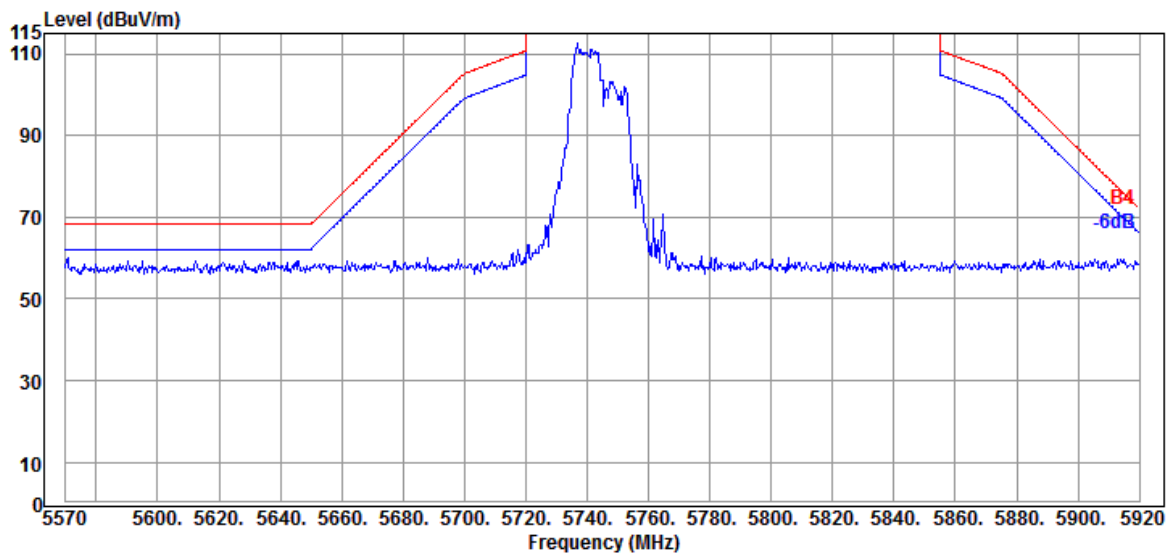


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

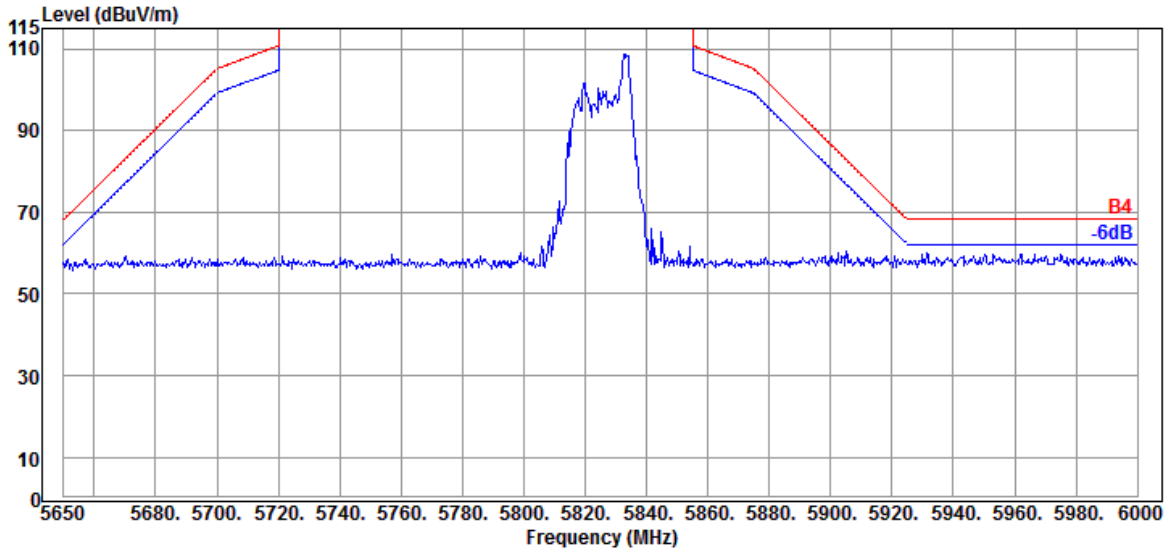


Antenna at Vertical Polarization

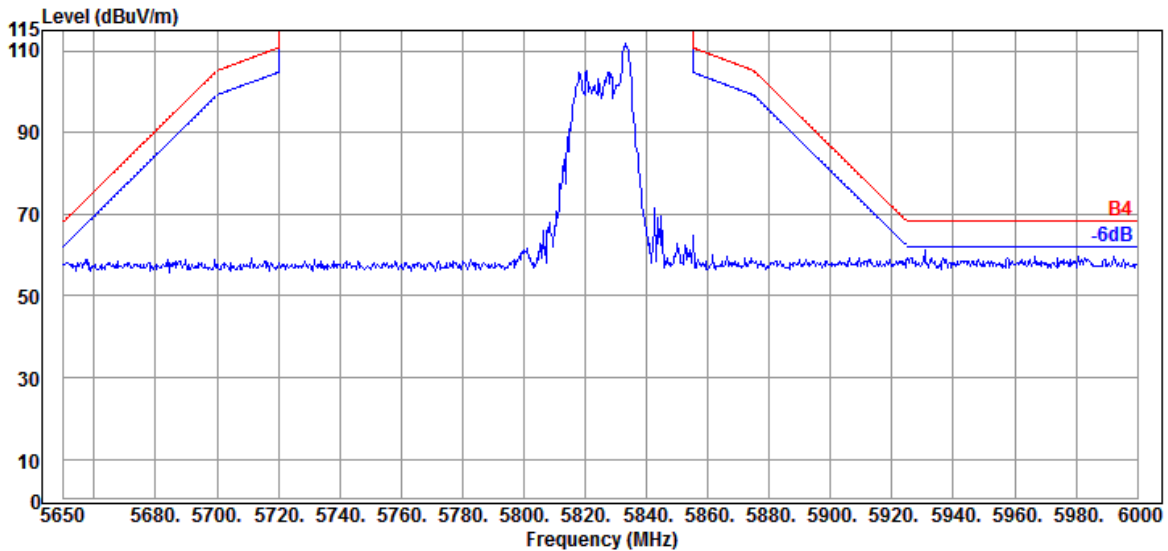


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

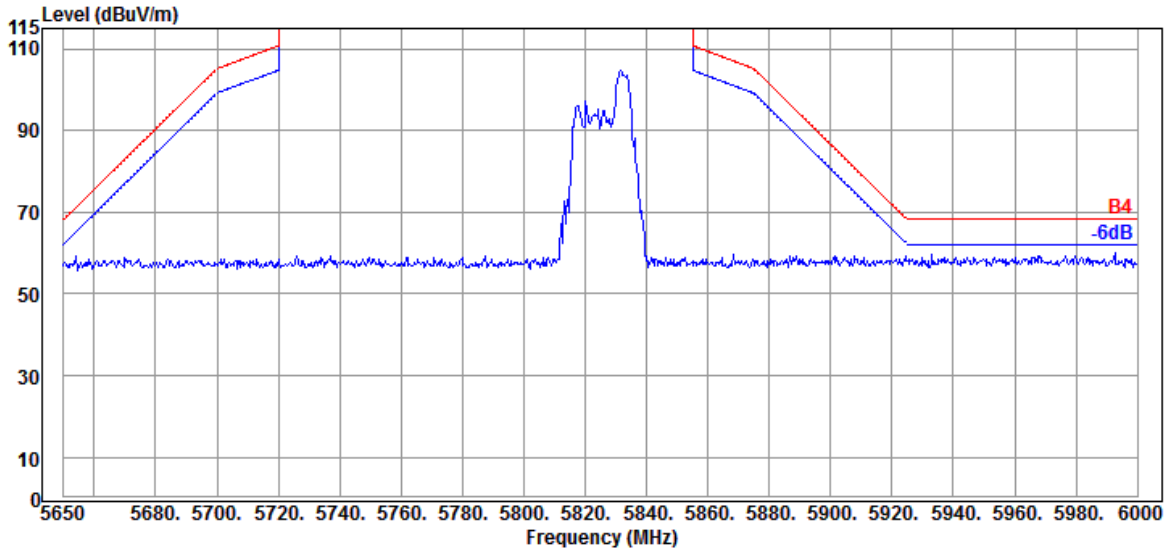


Antenna at Vertical Polarization

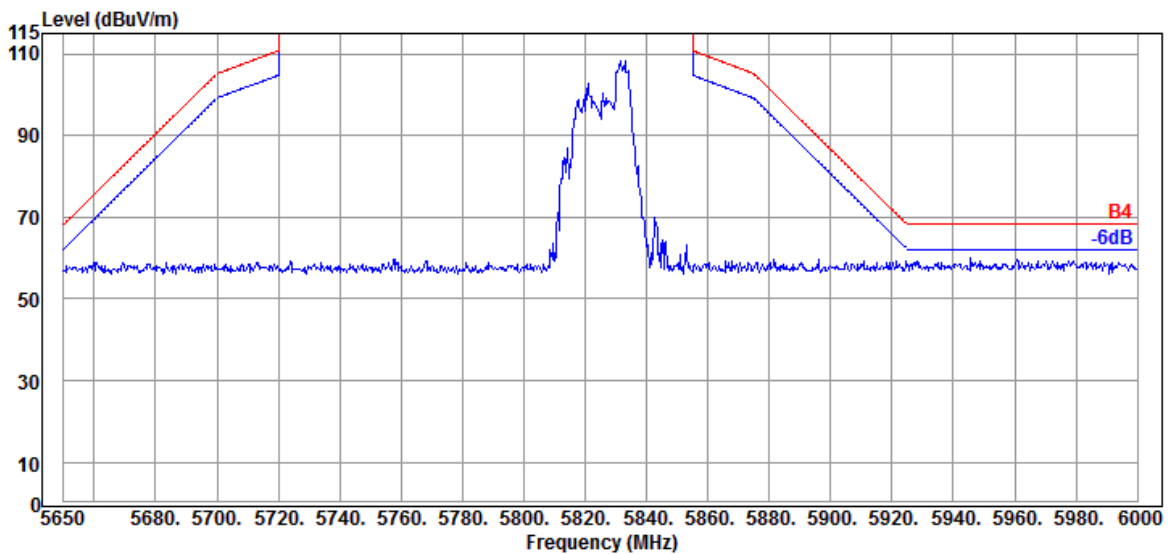


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

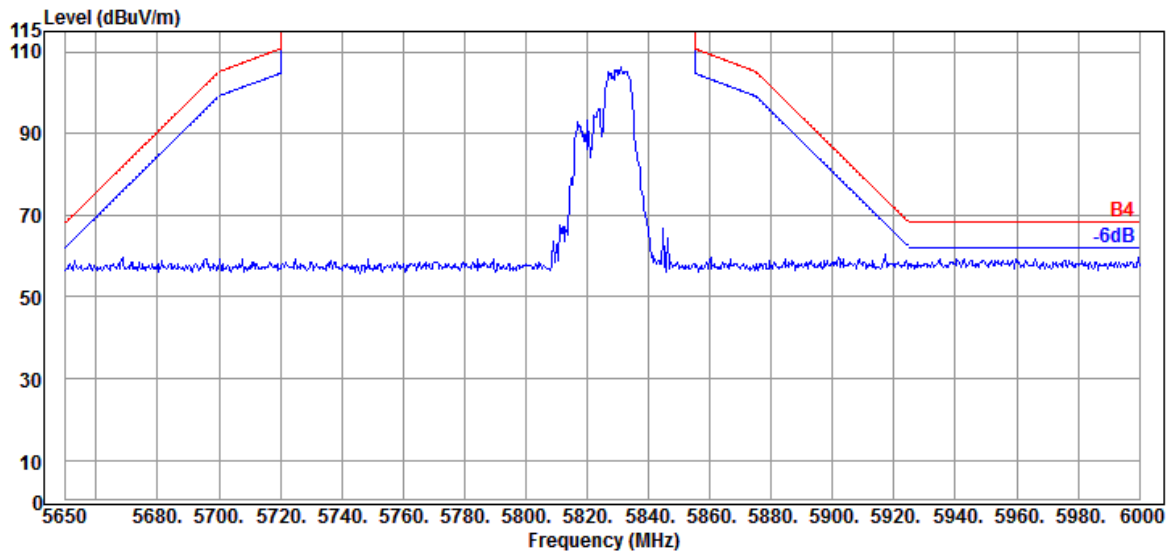

Antenna at Vertical Polarization

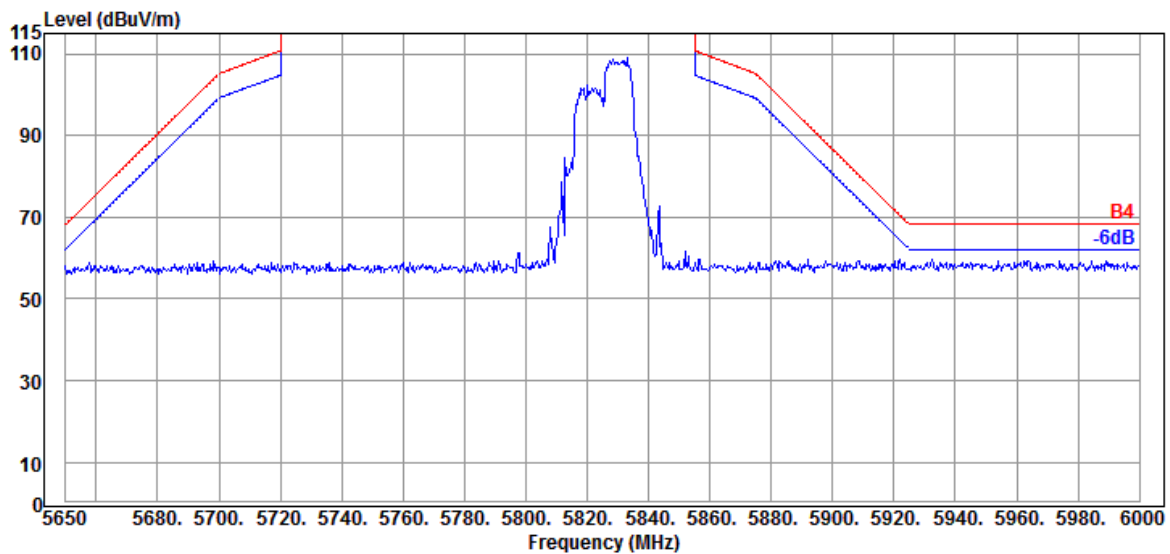


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

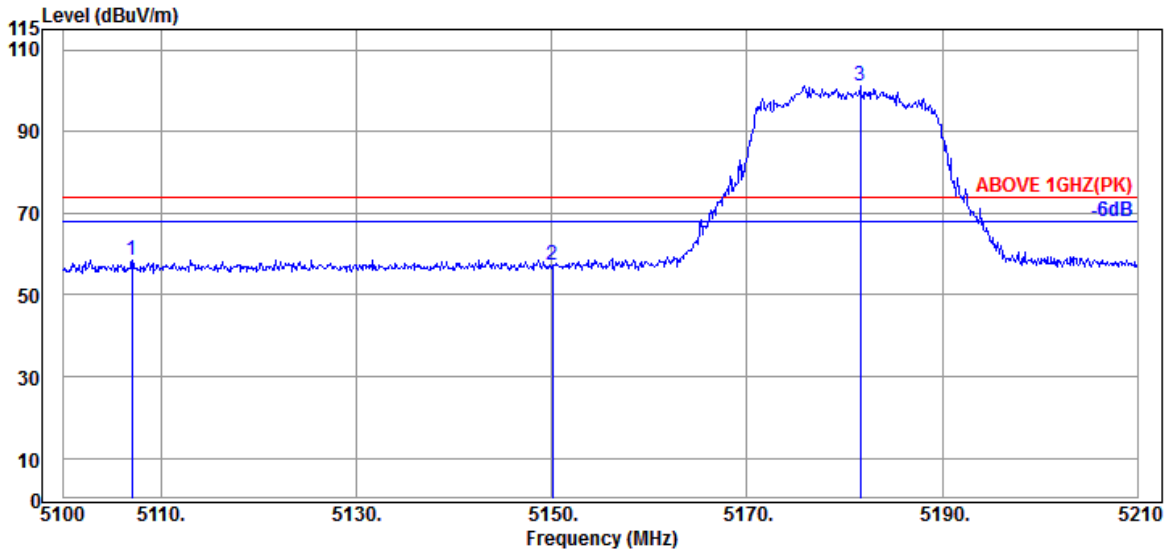

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.040	33.70	8.86	39.29	55.26	58.53	74.00	15.47	Peak
5150.050	33.70	8.88	39.29	54.21	57.50	74.00	16.50	Peak
@ 5181.620	33.83	8.90	39.28	97.77	101.22	---	---	Peak

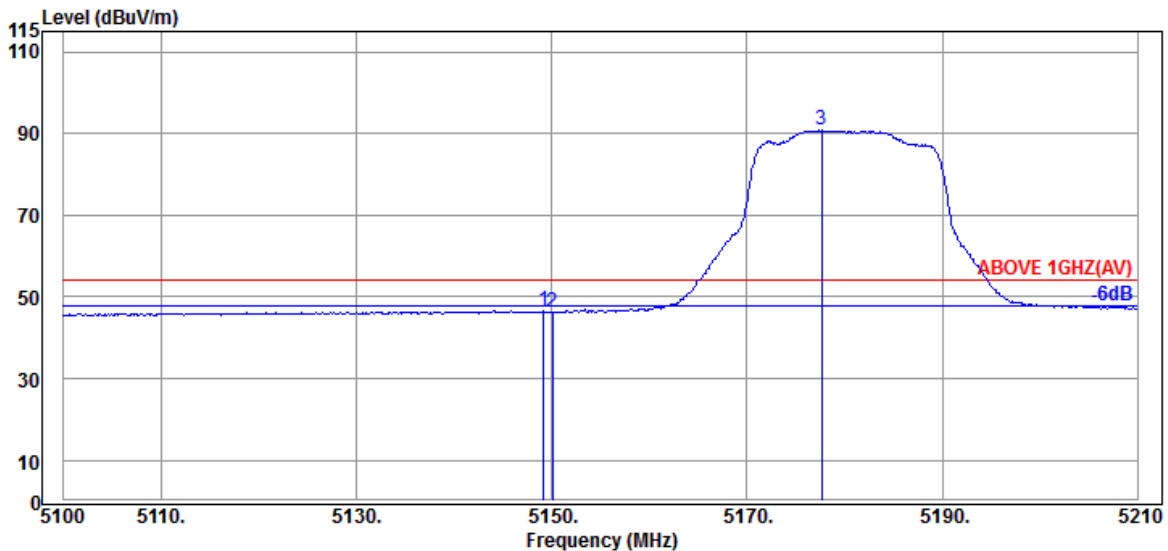


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.70	8.88	39.29	43.25	46.54	54.00	7.46	Average
5150.050	33.70	8.88	39.29	43.07	46.36	54.00	7.64	Average
@ 5177.660	33.83	8.90	39.28	87.27	90.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

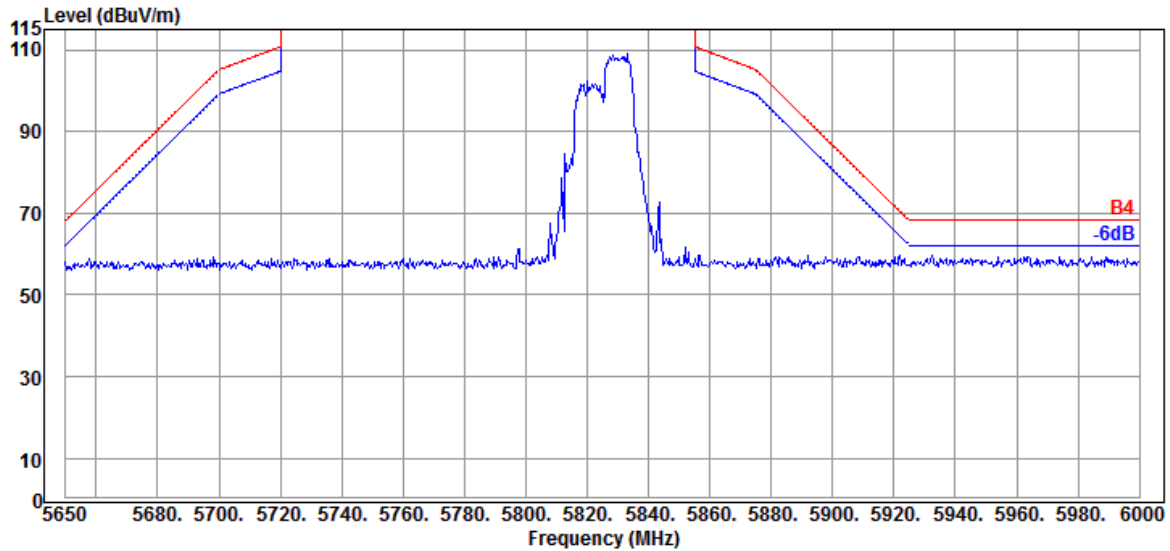

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.70	8.88	39.29	56.17	59.46	74.00	14.54	Peak
5150.050	33.70	8.88	39.29	55.54	58.83	74.00	15.17	Peak
@ 5184.700	33.83	8.90	39.28	104.20	107.65	---	---	Peak

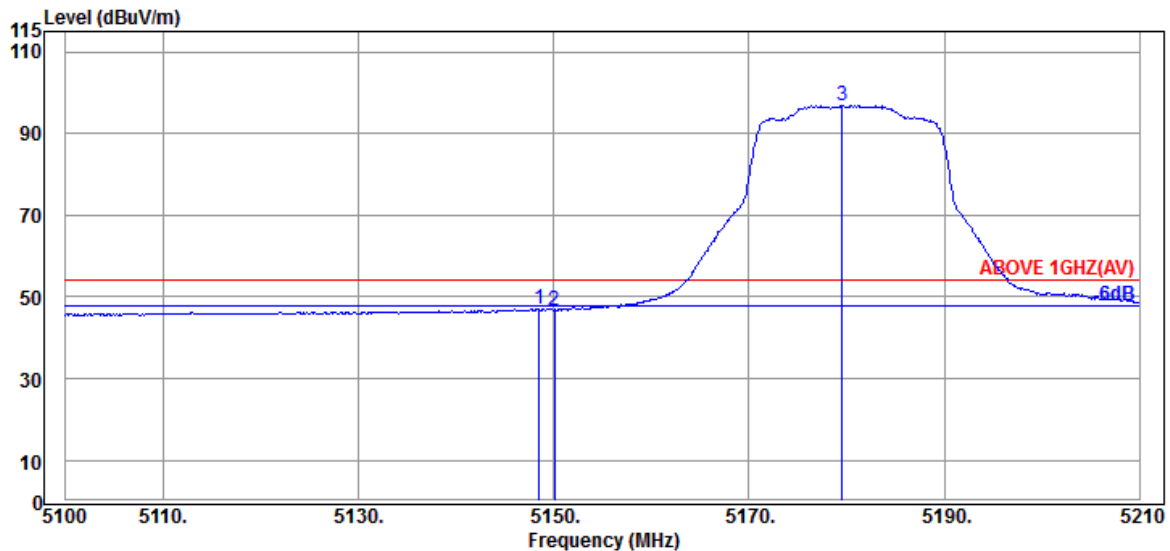


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	33.70	8.88	39.29	43.75	47.04	54.00	6.96	Average
5150.050	33.70	8.88	39.29	43.39	46.68	54.00	7.32	Average
@ 5179.530	33.83	8.90	39.28	93.42	96.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

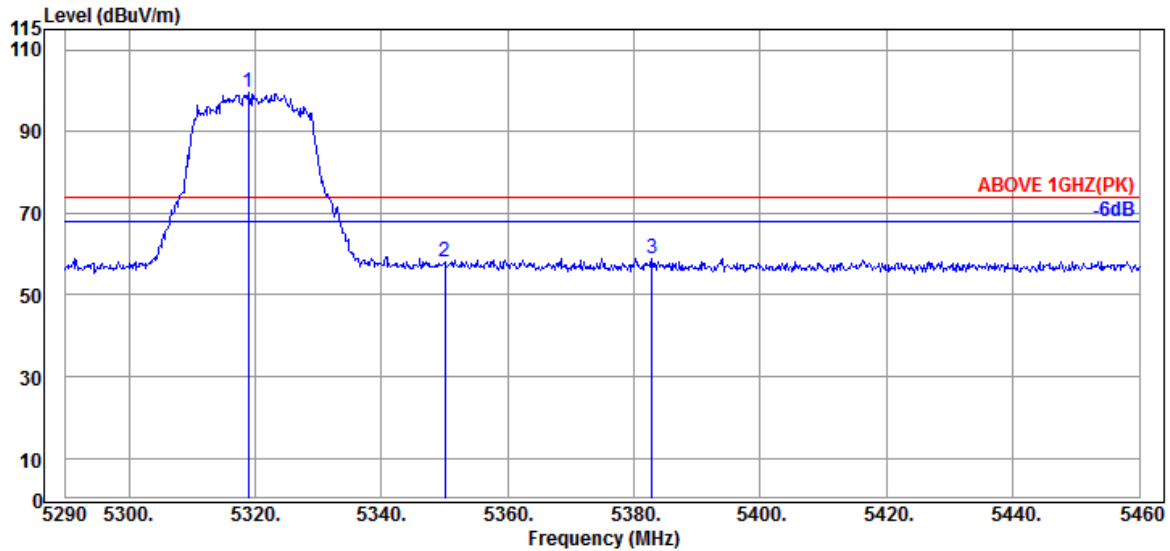

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.900	33.93	8.98	39.27	96.03	99.67	---	---	Peak
5350.010	34.00	8.99	39.27	54.28	58.00	74.00	16.00	Peak
5382.820	34.13	9.01	39.27	55.09	58.96	74.00	15.04	Peak

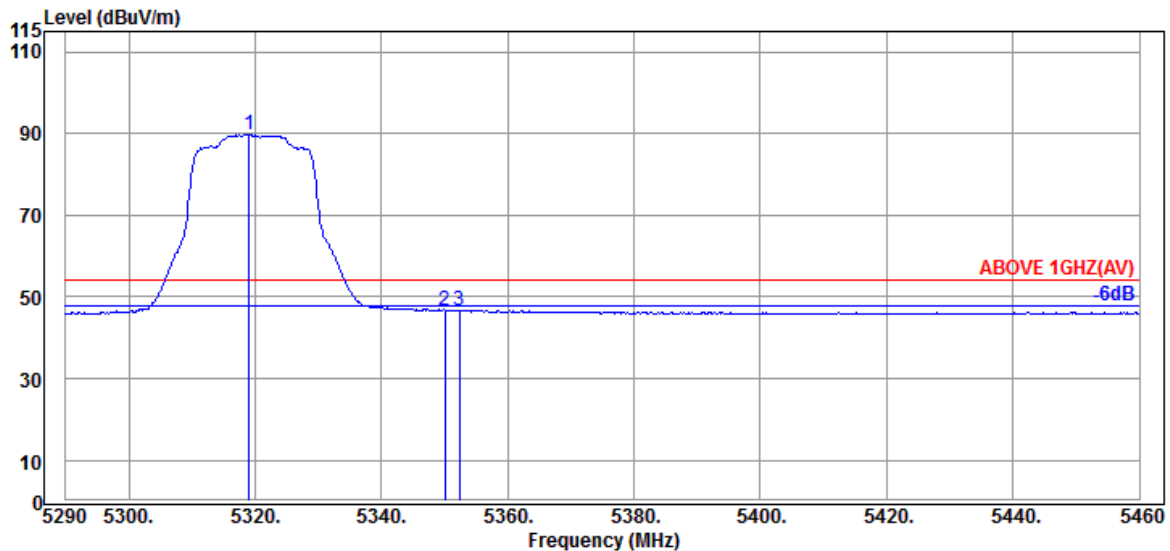


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.070	33.93	8.98	39.27	86.10	89.74	---	---	Average
5350.010	34.00	8.99	39.27	42.91	46.63	54.00	7.37	Average
5352.390	34.00	8.99	39.27	43.03	46.75	54.00	7.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

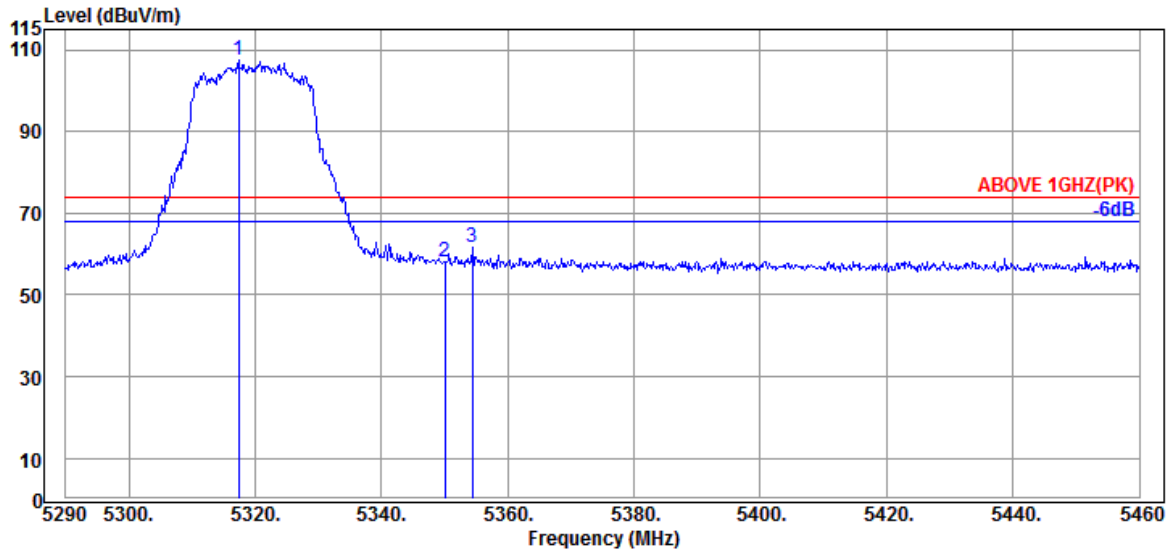

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.370	33.93	8.98	39.27	103.73	107.37	---	---	Peak
5350.010	34.00	8.99	39.27	54.43	58.15	74.00	15.85	Peak
5354.430	34.07	9.00	39.27	58.02	61.82	74.00	12.18	Peak

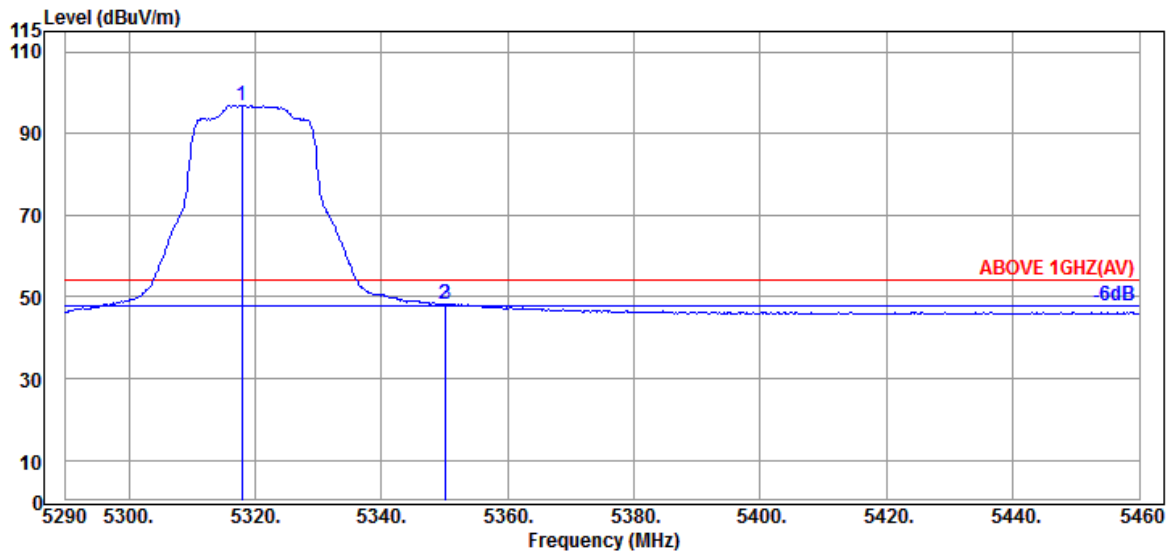


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.880	33.93	8.98	39.27	93.23	96.87	---	---	Average
5350.010	34.00	8.99	39.27	44.62	48.34	54.00	5.66	Average
5350.180	34.00	8.99	39.27	44.52	48.24	54.00	5.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

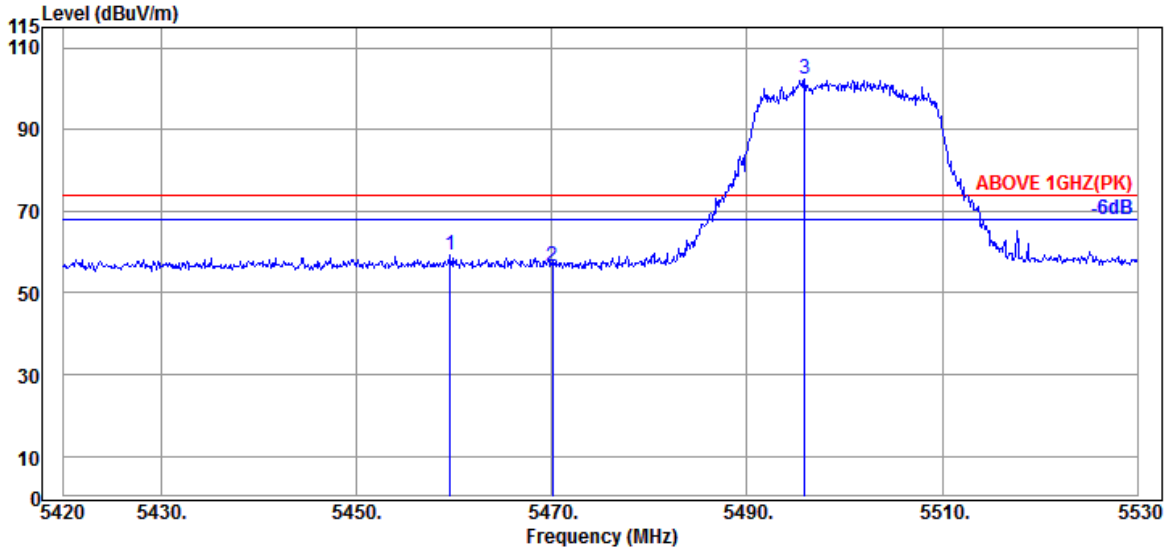

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	55.20	59.19	74.00	14.81	Peak
5470.050	34.17	9.06	39.26	52.71	56.68	74.00	17.32	Peak
@ 5495.900	34.10	9.08	39.26	98.28	102.20	---	---	Peak

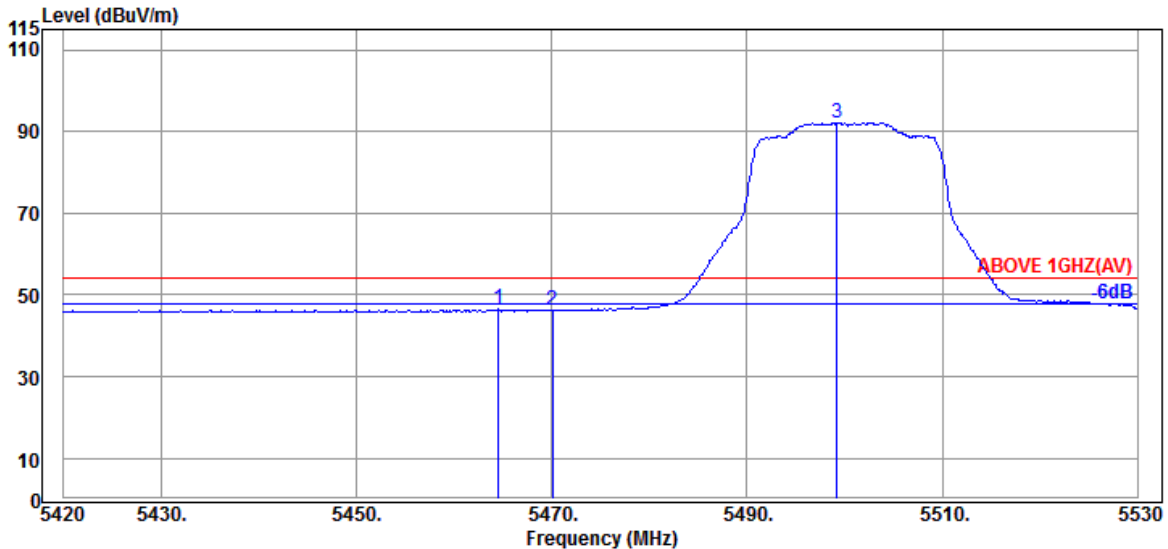


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.550	34.17	9.06	39.26	42.55	46.52	54.00	7.48	Average
5470.050	34.17	9.06	39.26	42.19	46.16	54.00	7.84	Average
@ 5499.200	34.10	9.08	39.26	88.32	92.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

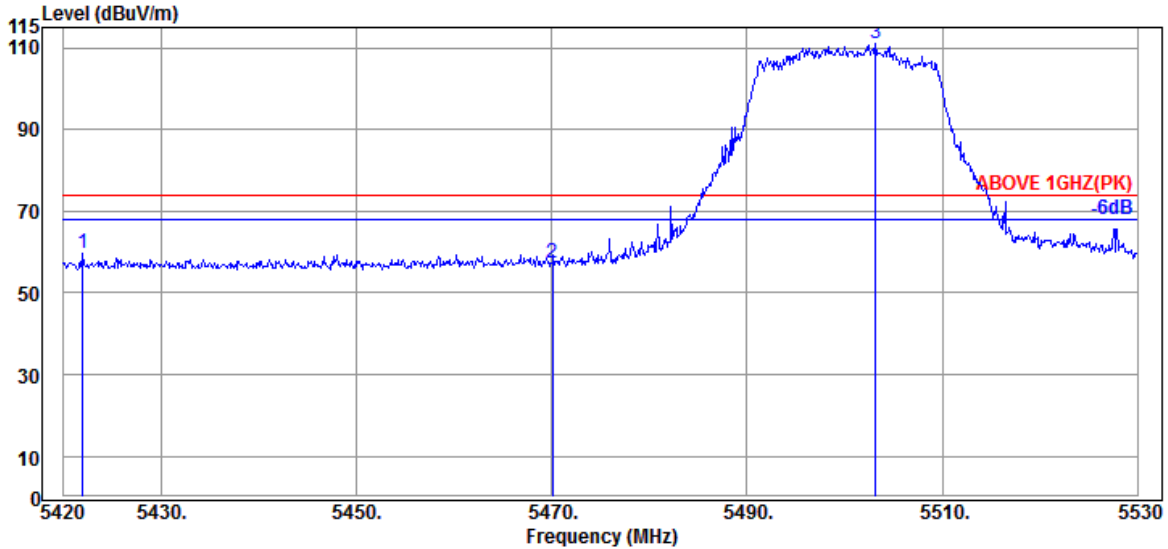

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.980	34.20	9.04	39.27	55.57	59.54	74.00	14.46	Peak
5470.050	34.17	9.06	39.26	53.34	57.31	74.00	16.69	Peak
@ 5503.160	34.10	9.08	39.26	106.96	110.88	---	---	Peak

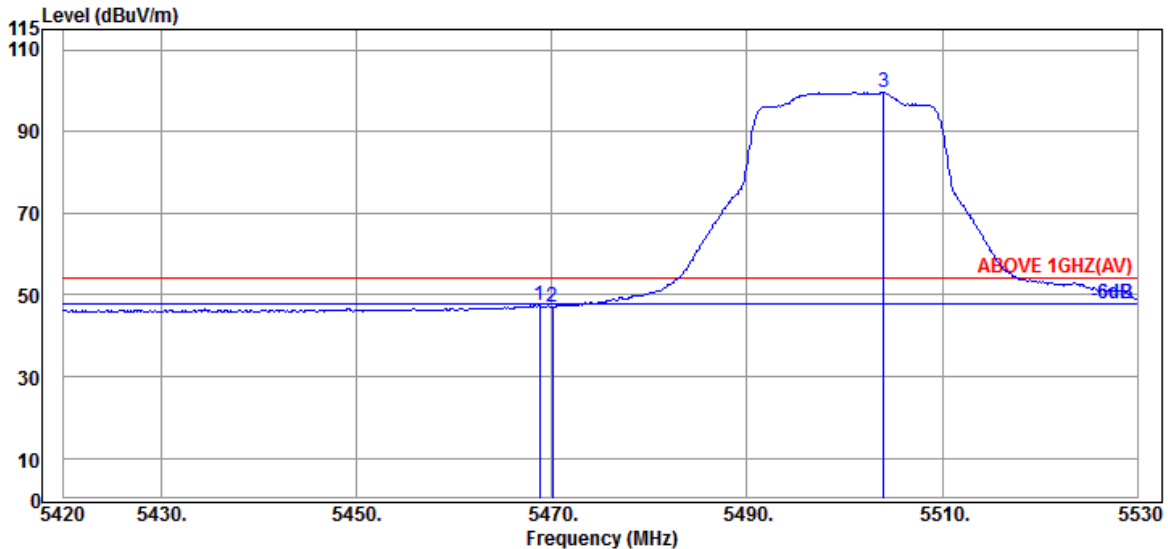


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	34.17	9.06	39.26	43.53	47.50	54.00	6.50	Average
5470.050	34.17	9.06	39.26	43.15	47.12	54.00	6.88	Average
@ 5504.040	34.10	9.08	39.26	95.71	99.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

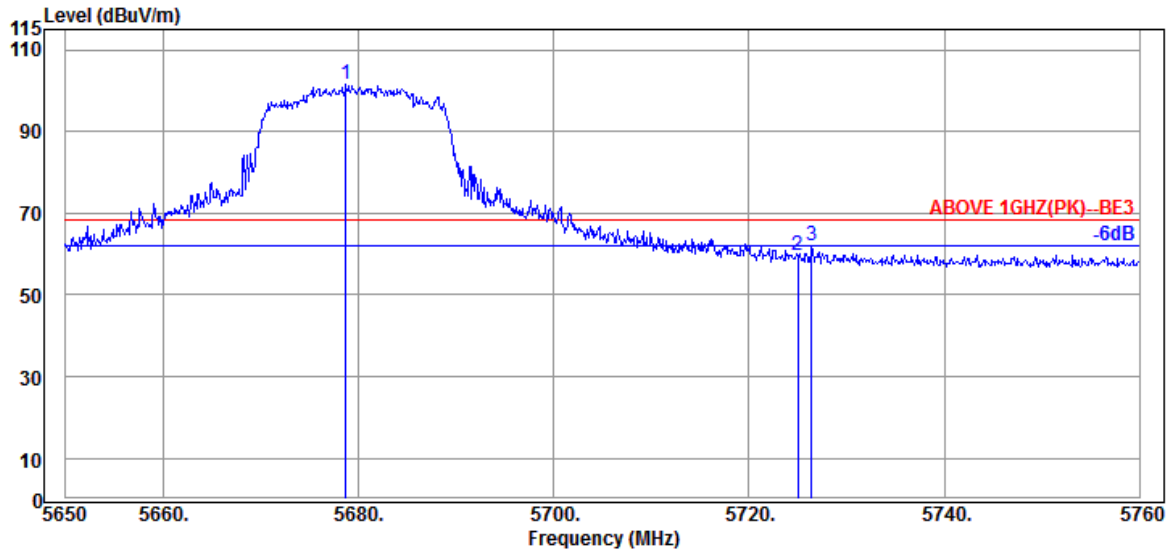

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.710	33.90	9.17	39.30	97.94	101.71	---	---	Peak
5725.020	33.90	9.20	39.30	55.83	59.63	68.20	8.57	Peak
5726.450	33.90	9.20	39.31	58.19	61.98	68.20	6.22	Peak

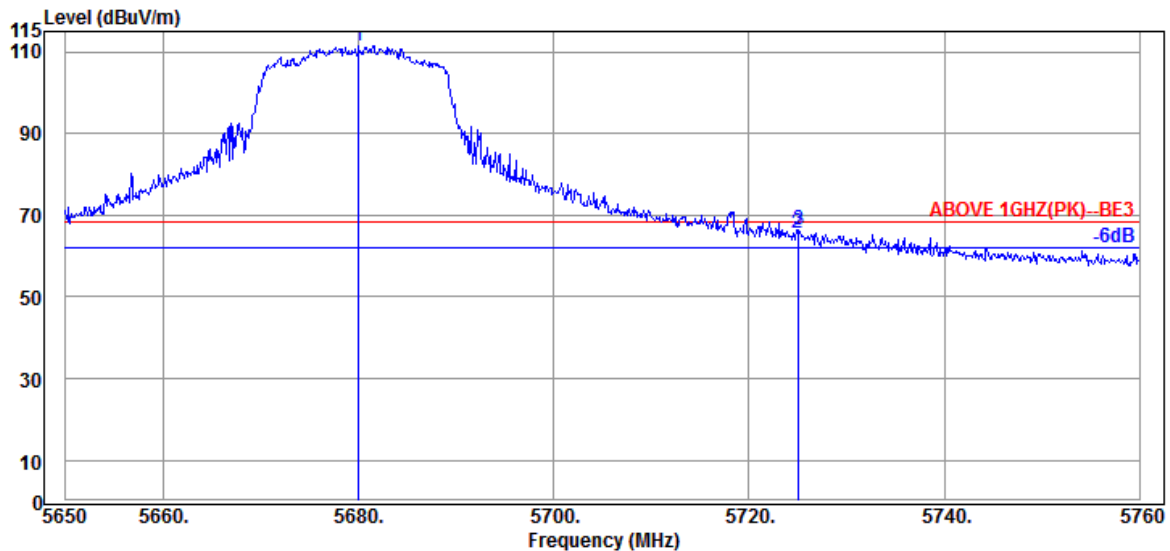


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.030	33.90	9.17	39.30	107.68	111.45	---	---	Peak
5725.020	33.90	9.20	39.30	61.83	65.63	68.20	2.57	Peak
5725.130	33.90	9.20	39.30	62.69	66.49	68.20	1.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

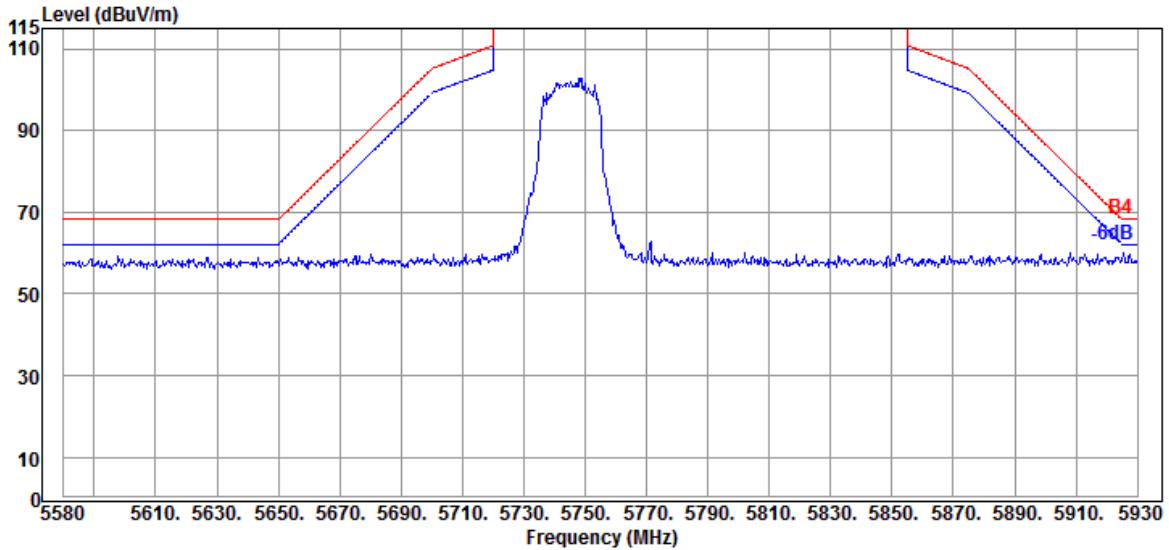


Antenna at Vertical Polarization

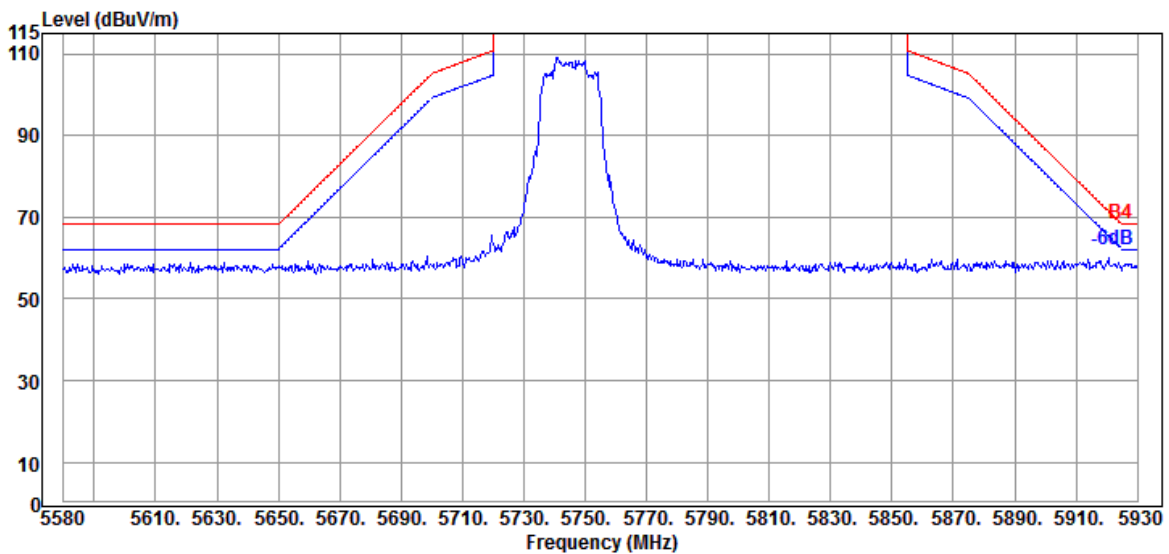


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

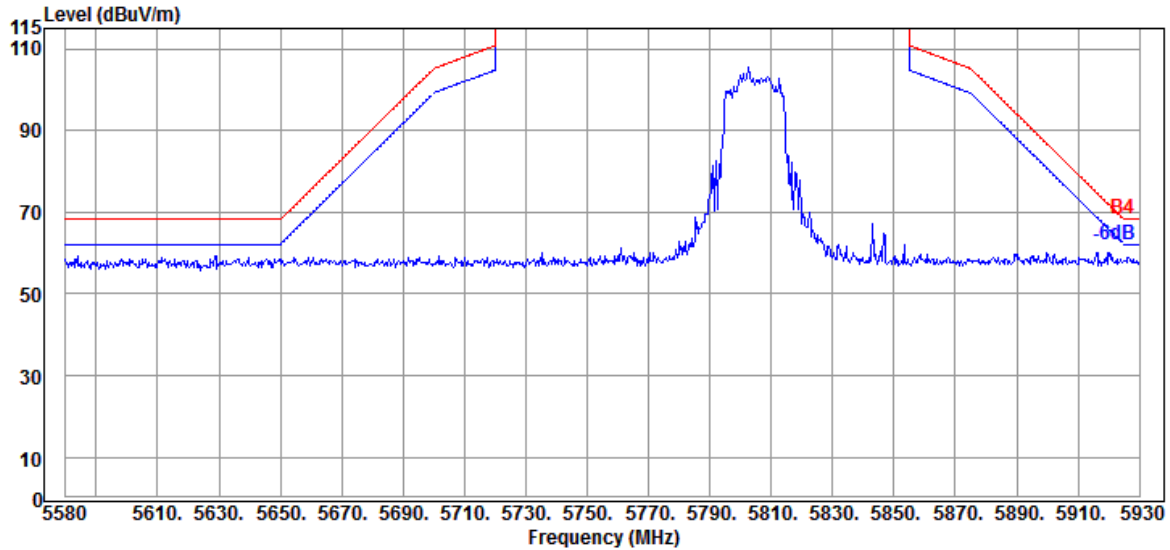

Antenna at Vertical Polarization

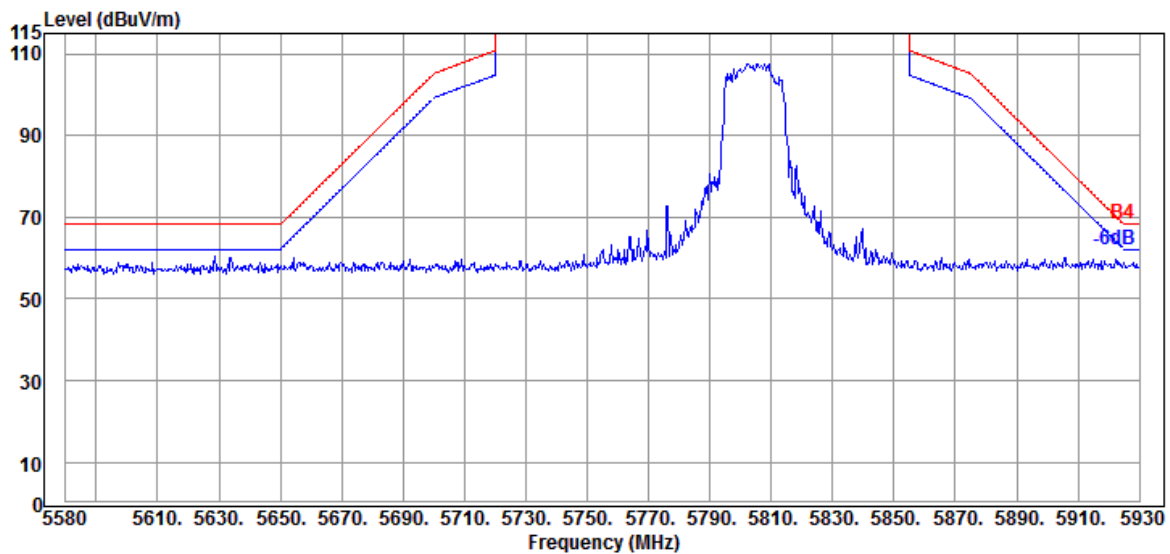


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

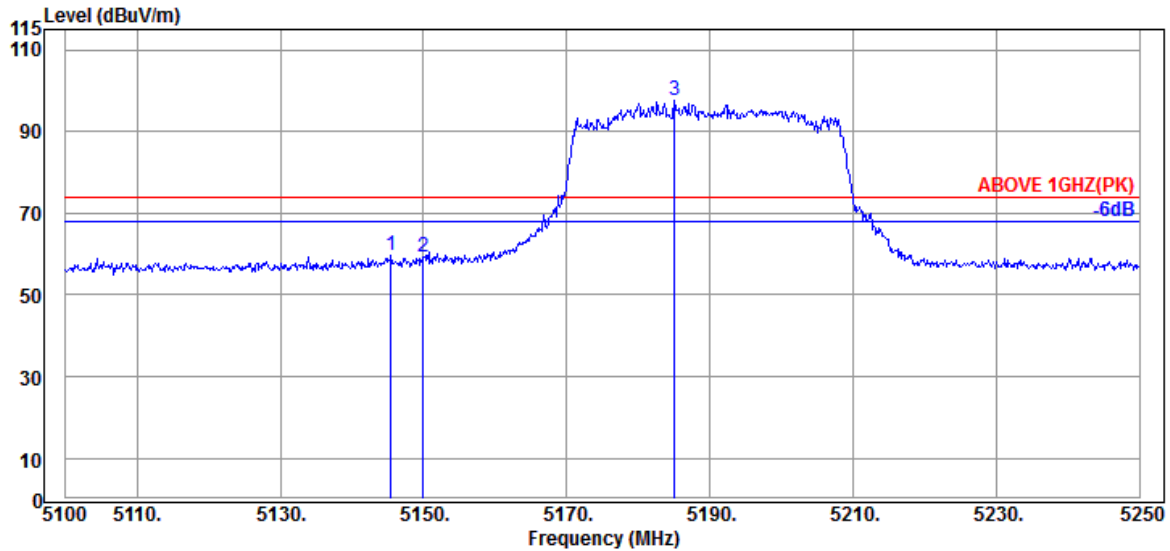

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	33.70	8.88	39.29	56.27	59.56	74.00	14.44	Peak
5149.950	33.70	8.88	39.29	55.79	59.08	74.00	14.92	Peak
@ 5185.050	33.83	8.90	39.28	94.06	97.51	---	---	Peak

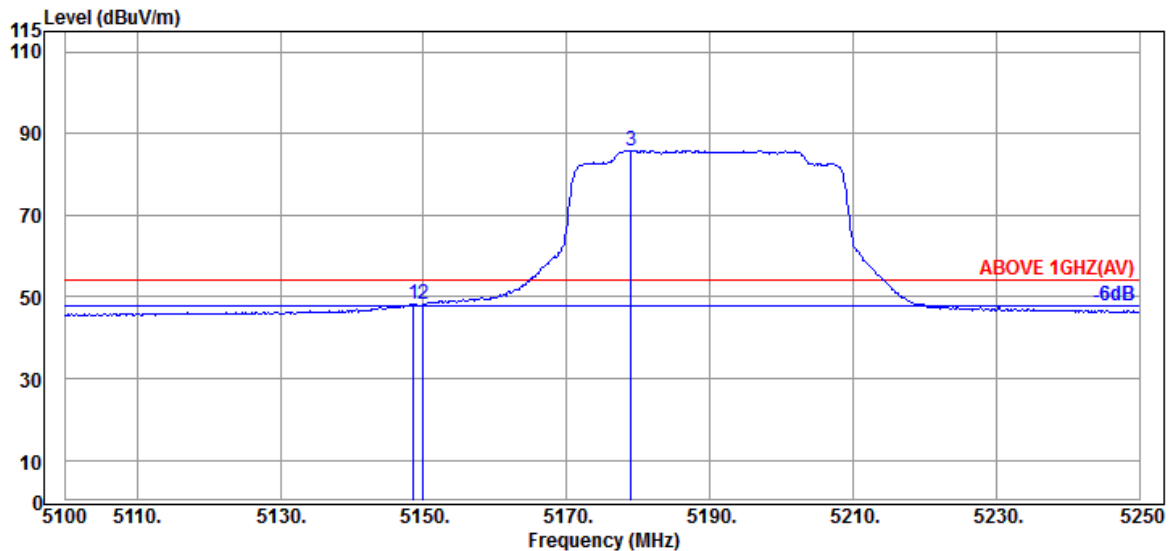


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.70	8.88	39.29	45.05	48.34	54.00	5.66	Average
5149.950	33.70	8.88	39.29	44.81	48.10	54.00	5.90	Average
@ 5179.050	33.83	8.90	39.28	82.41	85.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

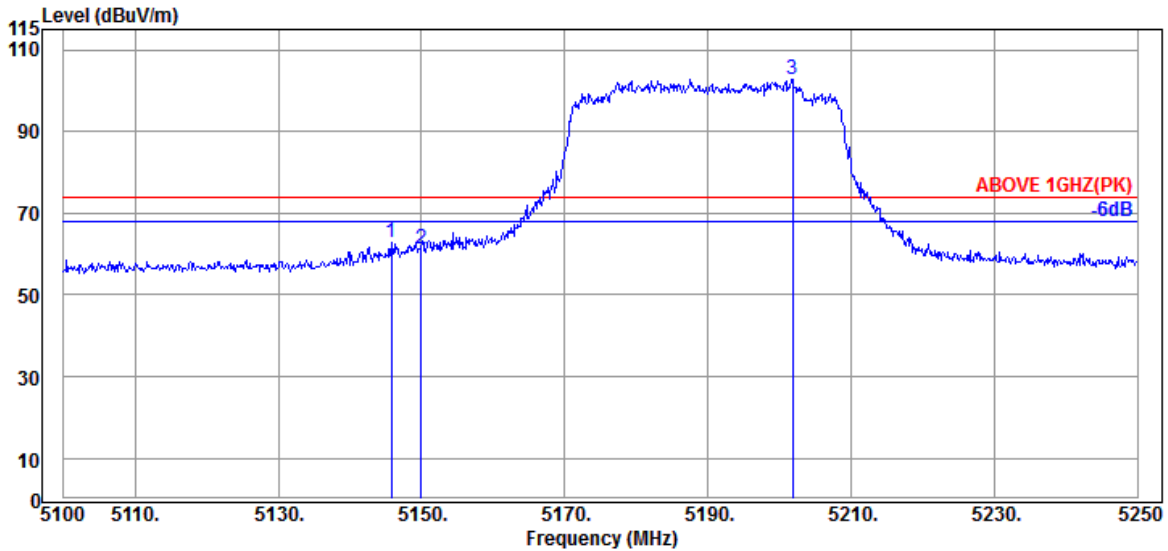

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.750	33.70	8.88	39.29	59.70	62.99	74.00	11.01	Peak
5149.950	33.70	8.88	39.29	58.10	61.39	74.00	12.61	Peak
@ 5201.850	33.88	8.92	39.28	99.42	102.94	---	---	Peak

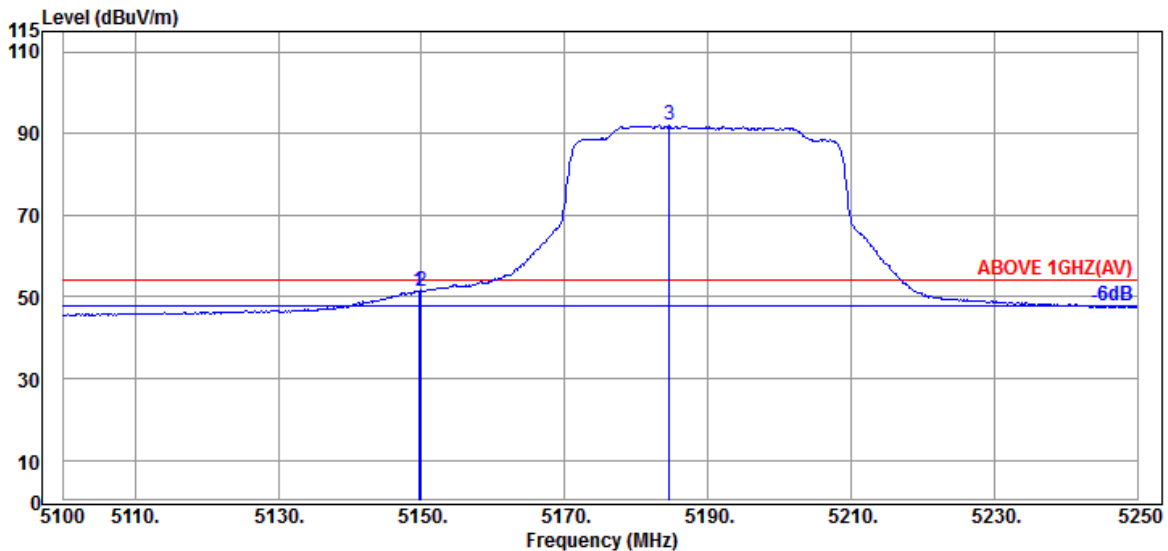


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	48.09	51.38	54.00	2.62	Average
5149.950	33.70	8.88	39.29	48.19	51.48	54.00	2.52	Average
@ 5184.600	33.83	8.90	39.28	88.47	91.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

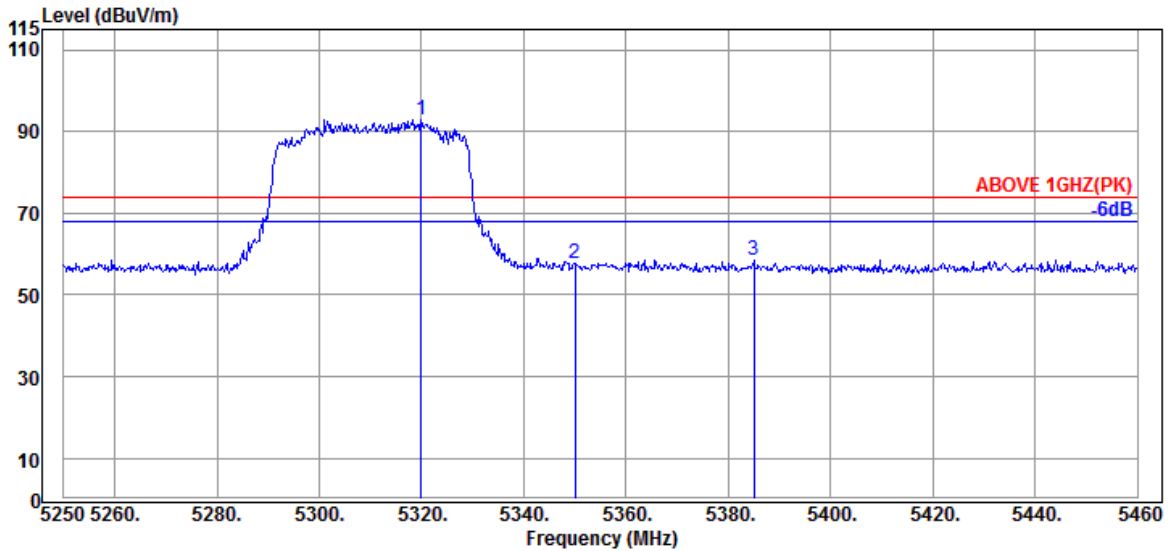

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.930	33.93	8.98	39.27	89.38	93.02	---	---	Peak
5349.960	34.00	8.99	39.27	54.09	57.81	74.00	16.19	Peak
5385.030	34.13	9.01	39.27	54.71	58.58	74.00	15.42	Peak

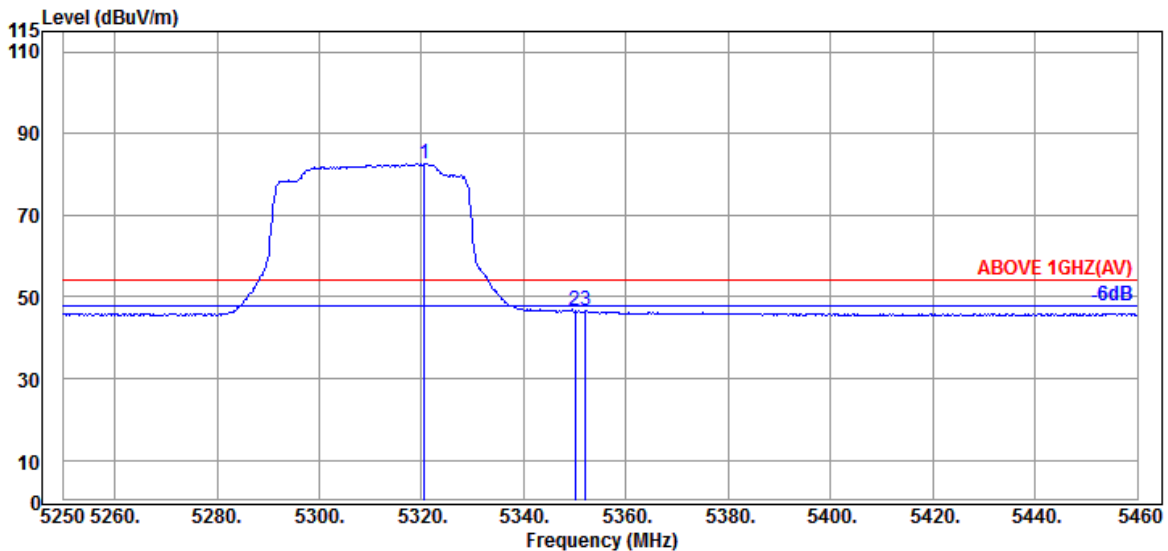


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.560	33.93	8.98	39.27	78.92	82.56	---	---	Average
5349.960	34.00	8.99	39.27	43.08	46.80	54.00	7.20	Average
5352.060	34.00	8.99	39.27	43.01	46.73	54.00	7.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

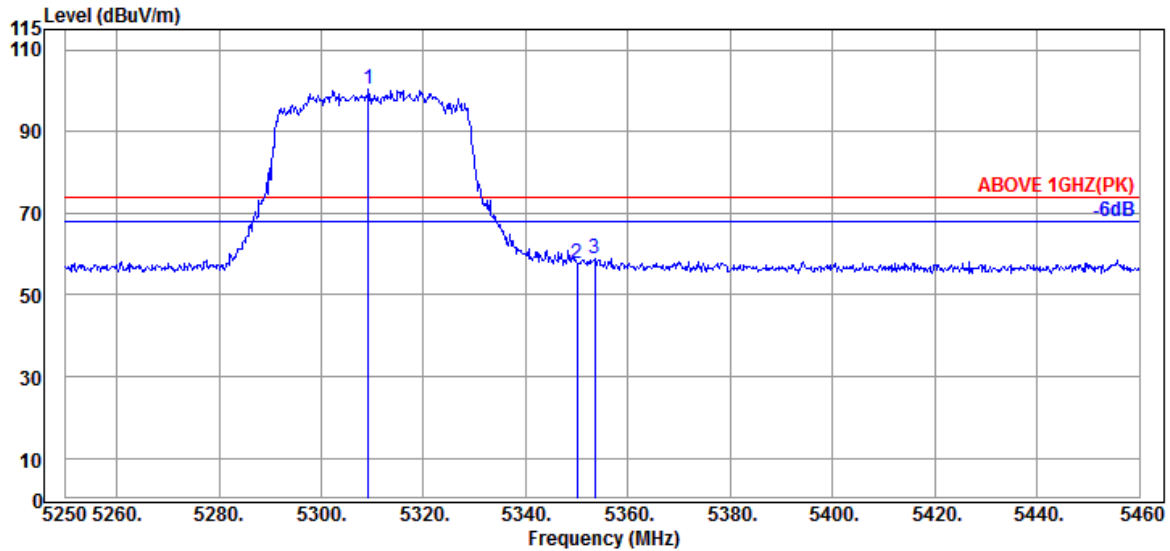

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.220	33.93	8.98	39.28	96.84	100.47	---	---	Peak
5349.960	34.00	8.99	39.27	53.82	57.54	74.00	16.46	Peak
5353.530	34.00	8.99	39.27	55.11	58.83	74.00	15.17	Peak

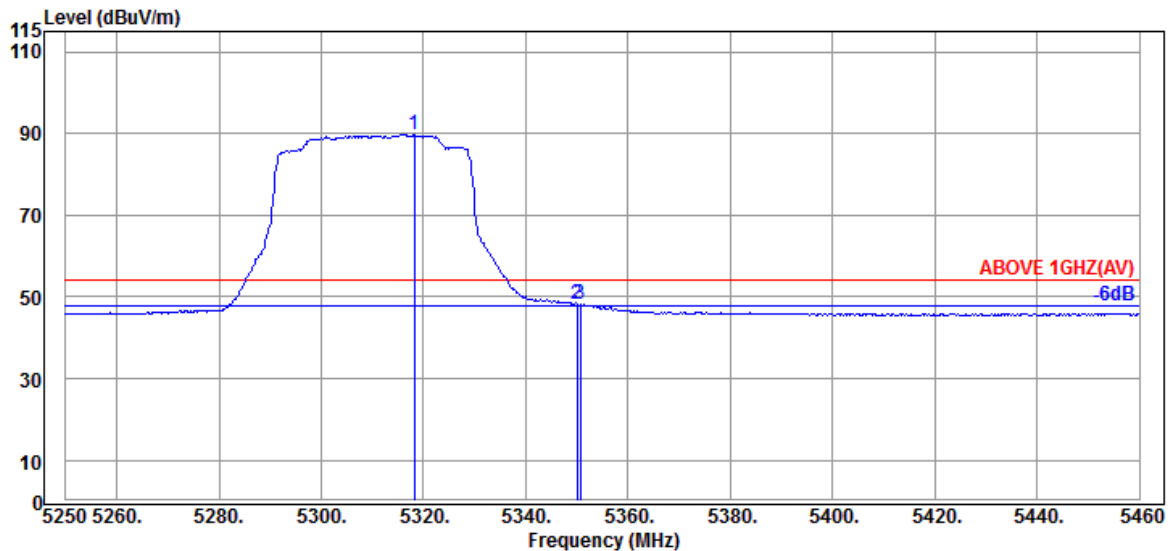


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.250	33.93	8.98	39.27	86.12	89.76	---	---	Average
5349.960	34.00	8.99	39.27	44.60	48.32	54.00	5.68	Average
5350.590	34.00	8.99	39.27	44.42	48.14	54.00	5.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

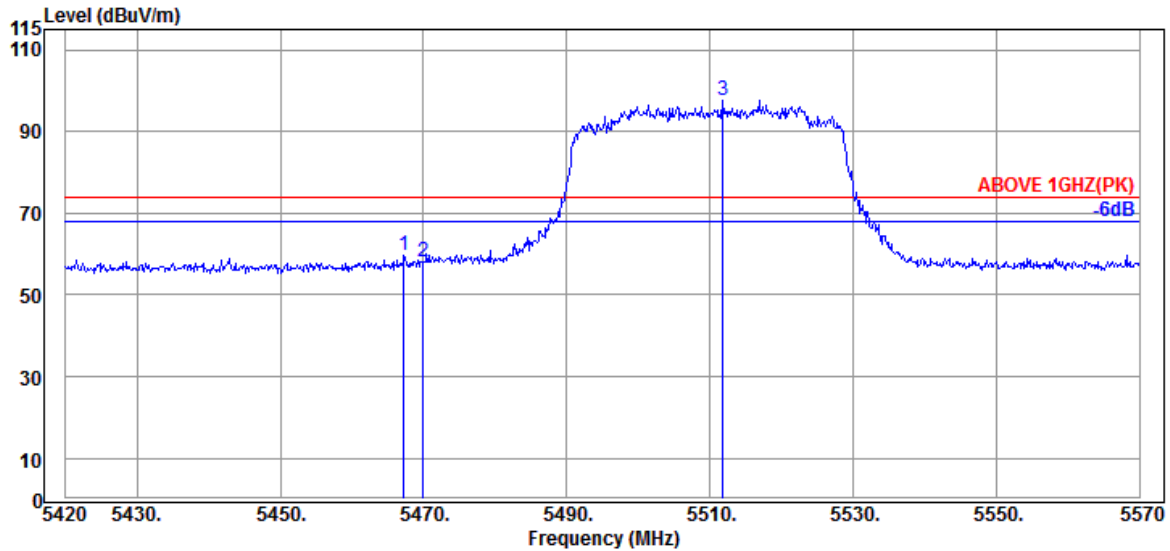

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.17	9.06	39.26	55.71	59.68	74.00	14.32	Peak
5469.950	34.17	9.06	39.26	53.98	57.95	74.00	16.05	Peak
@ 5511.800	34.07	9.09	39.26	93.87	97.77	---	---	Peak

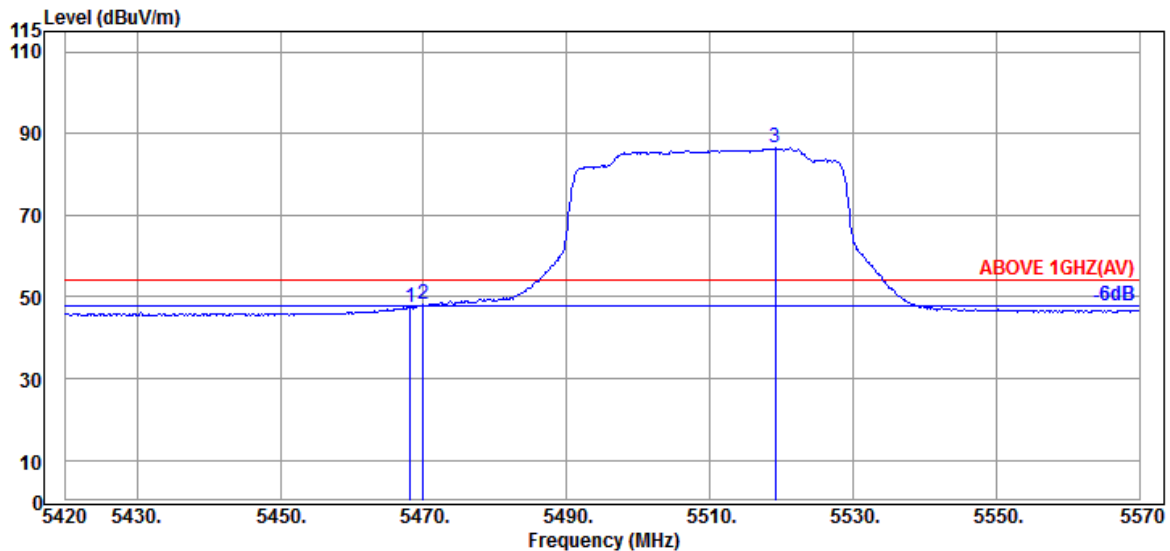


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.17	9.06	39.26	43.52	47.49	54.00	6.51	Average
5469.950	34.17	9.06	39.26	44.08	48.05	54.00	5.95	Average
@ 5519.150	34.07	9.09	39.26	82.46	86.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

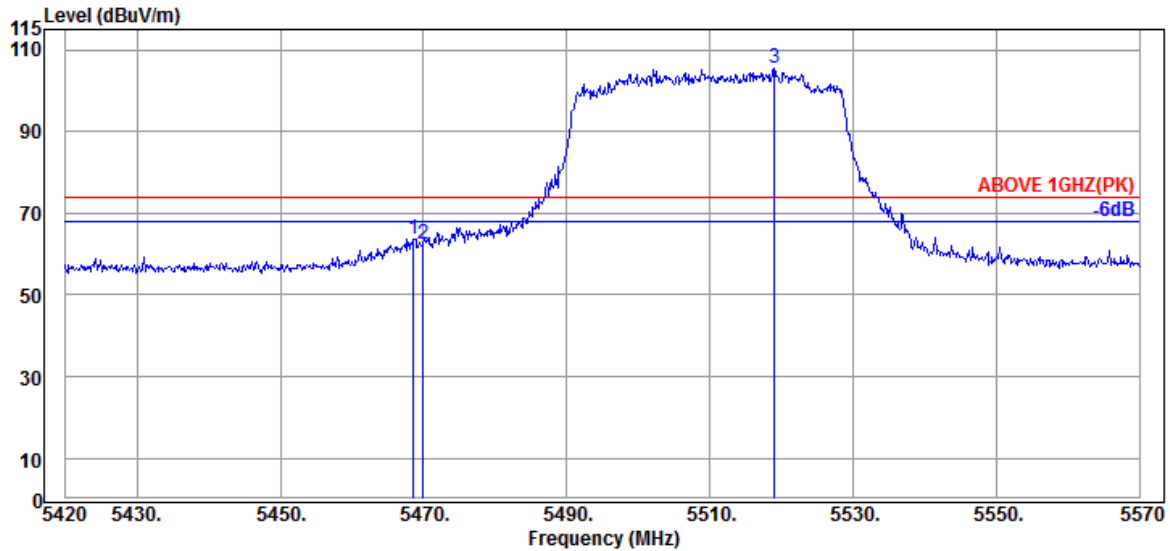

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.17	9.06	39.26	59.73	63.70	74.00	10.30	Peak
5469.950	34.17	9.06	39.26	58.65	62.62	74.00	11.38	Peak
@ 5519.000	34.07	9.09	39.26	101.62	105.52	---	---	Peak

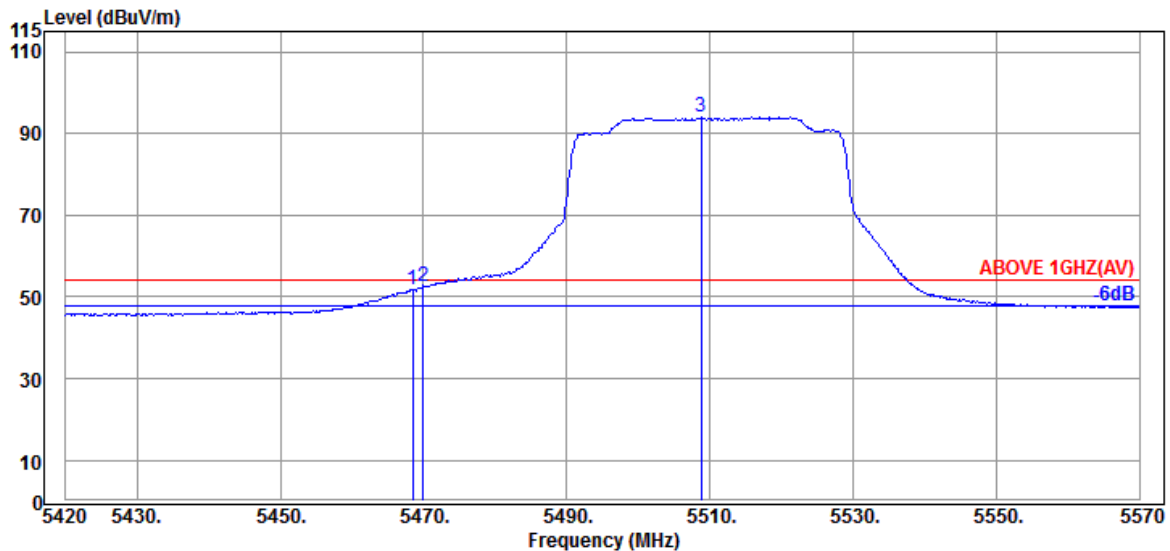


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.17	9.06	39.26	47.80	51.77	54.00	2.23	Average
5469.950	34.17	9.06	39.26	48.64	52.61	54.00	1.39	Average
@ 5508.800	34.10	9.08	39.26	90.00	93.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

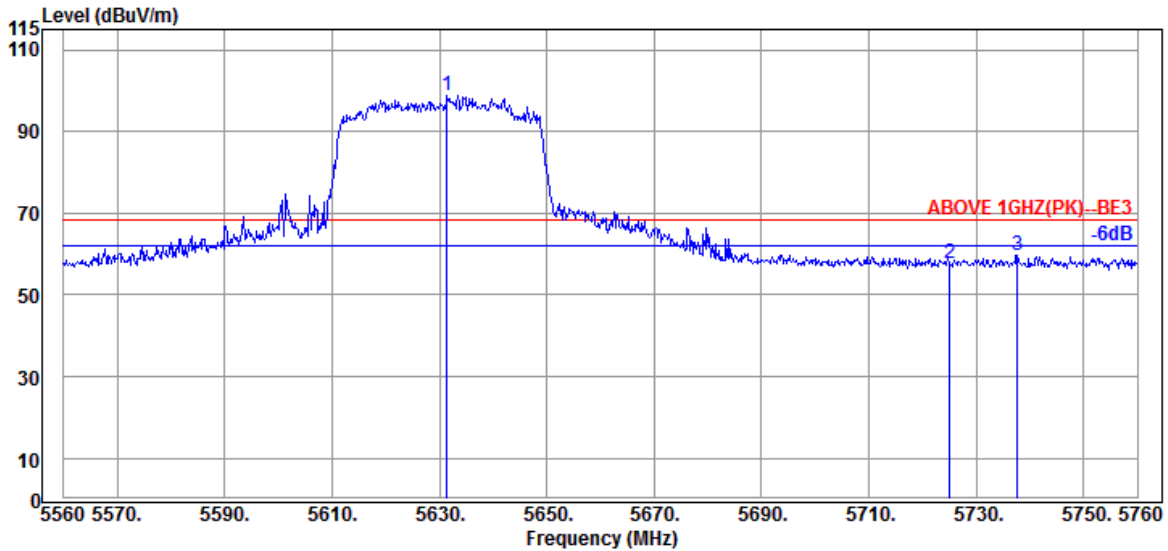

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.400	33.93	9.14	39.29	95.01	98.79	---	---	Peak
5725.000	33.90	9.20	39.30	53.84	57.64	68.20	10.56	Peak
5737.600	33.90	9.20	39.31	55.95	59.74	68.20	8.46	Peak

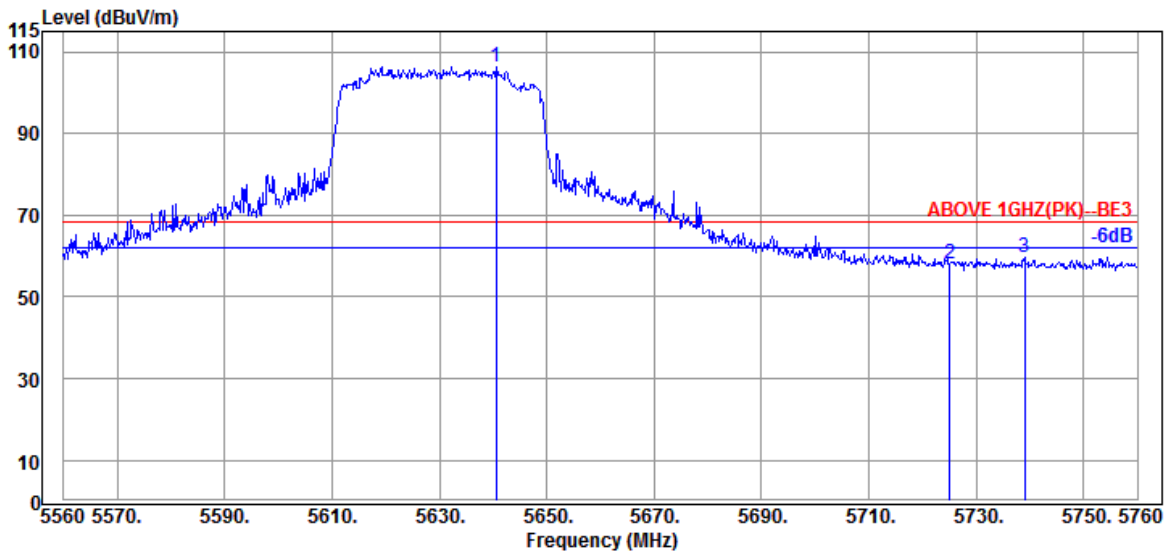


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5640.600	33.90	9.15	39.29	102.46	106.22	---	---	Peak
5725.000	33.90	9.20	39.30	54.47	58.27	68.20	9.93	Peak
5739.000	33.90	9.20	39.31	55.87	59.66	68.20	8.54	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

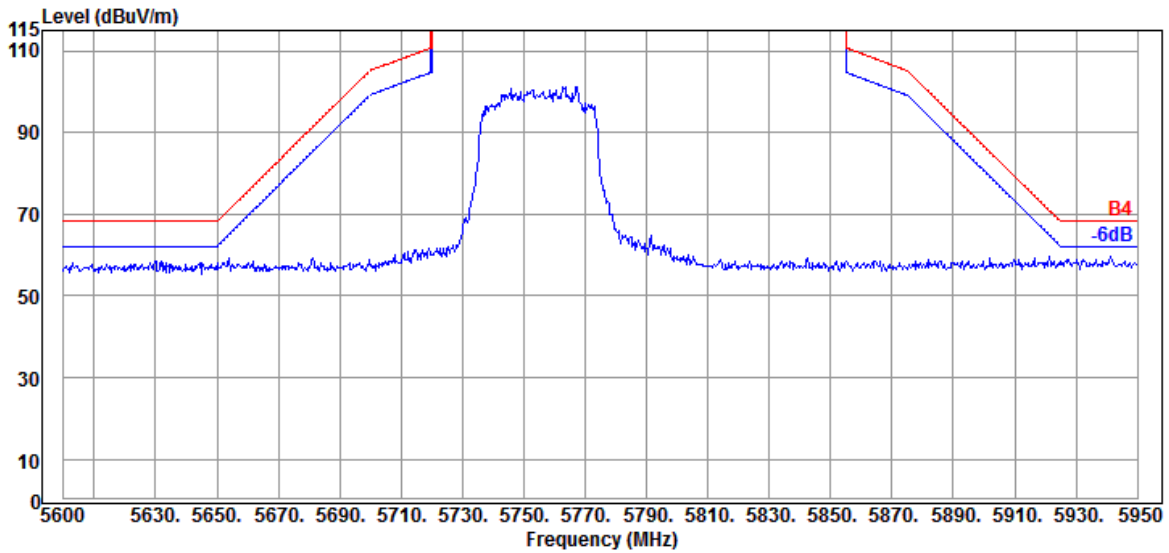


Antenna at Vertical Polarization

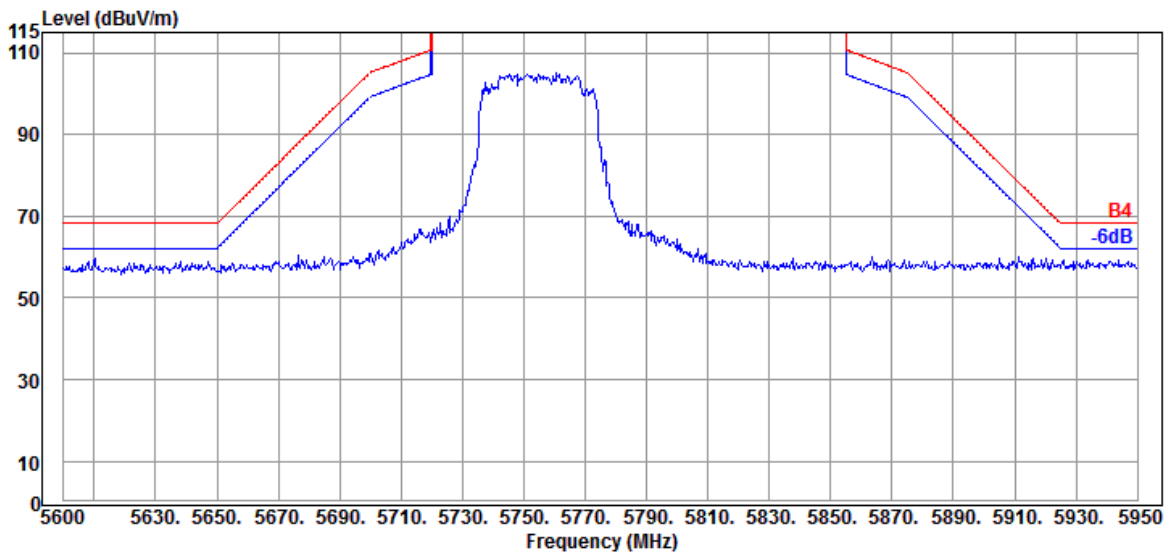


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

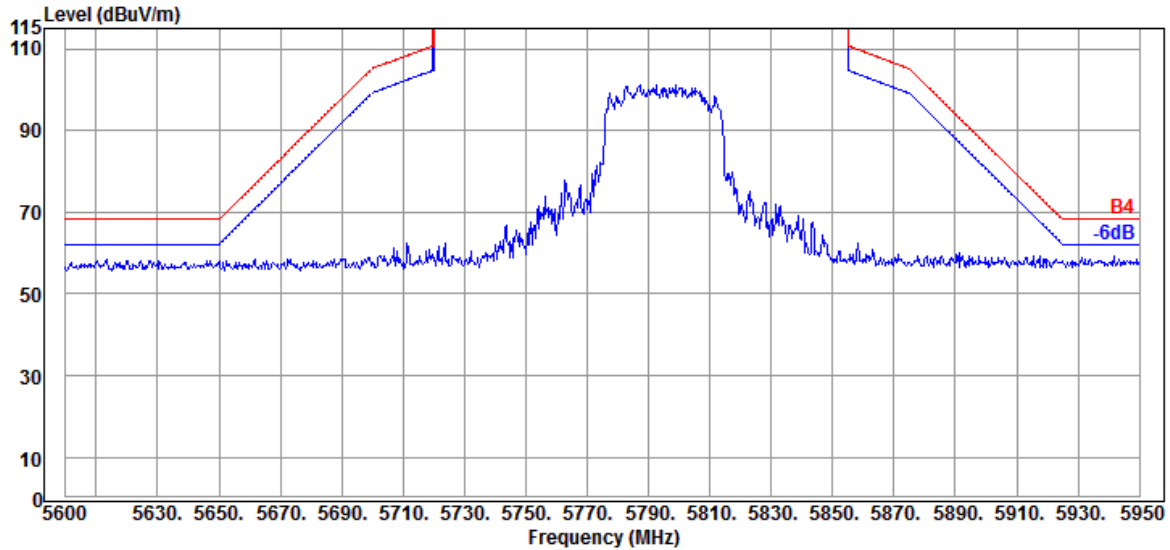

Antenna at Vertical Polarization

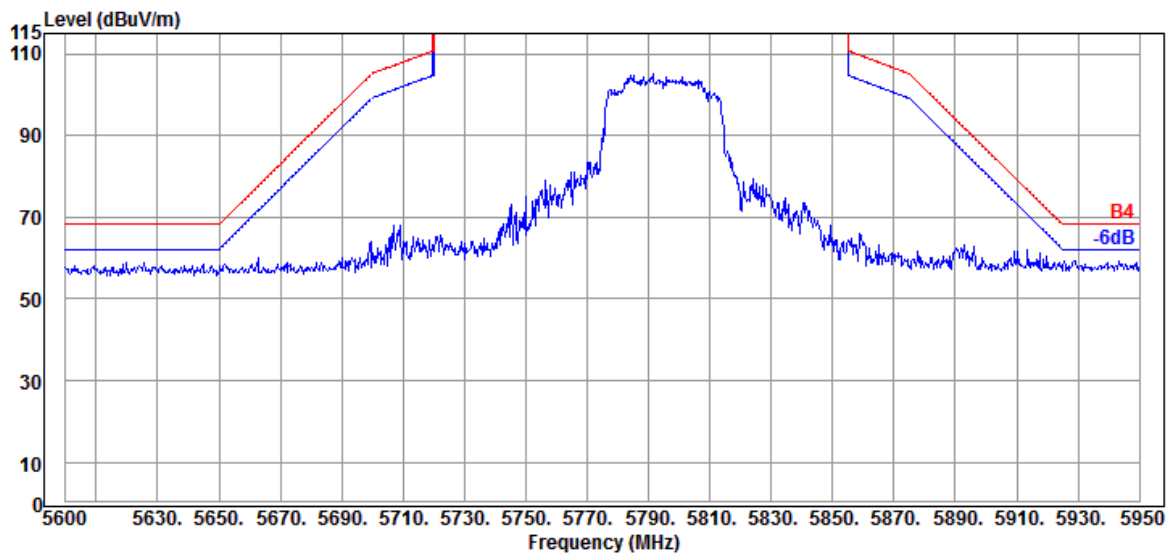


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

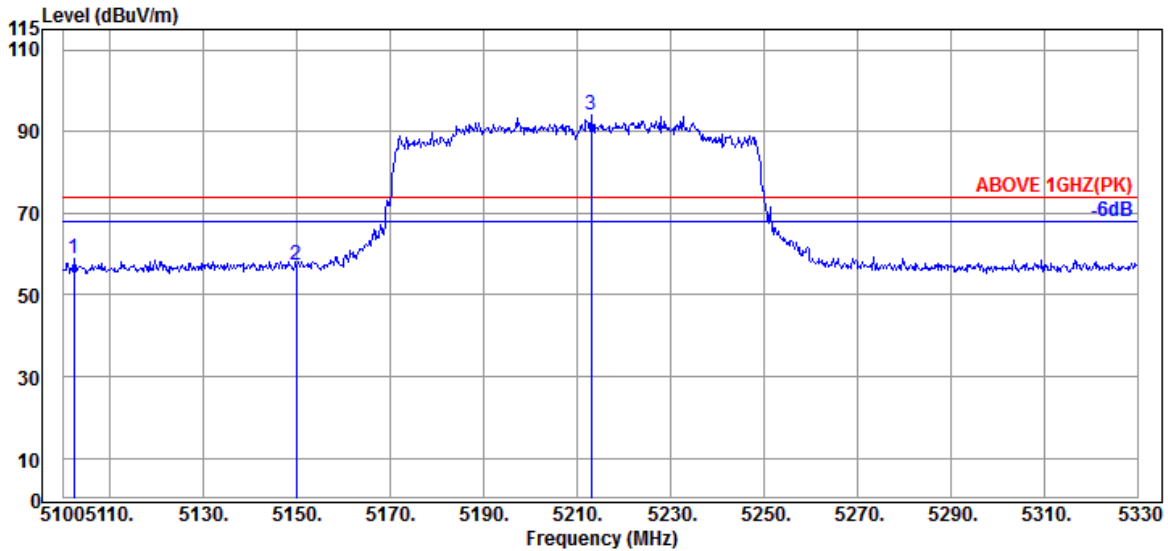

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.300	33.70	8.86	39.29	55.55	58.82	74.00	15.18	Peak
5149.910	33.70	8.88	39.29	53.94	57.23	74.00	16.77	Peak
@ 5212.930	33.88	8.92	39.28	90.53	94.05	---	---	Peak

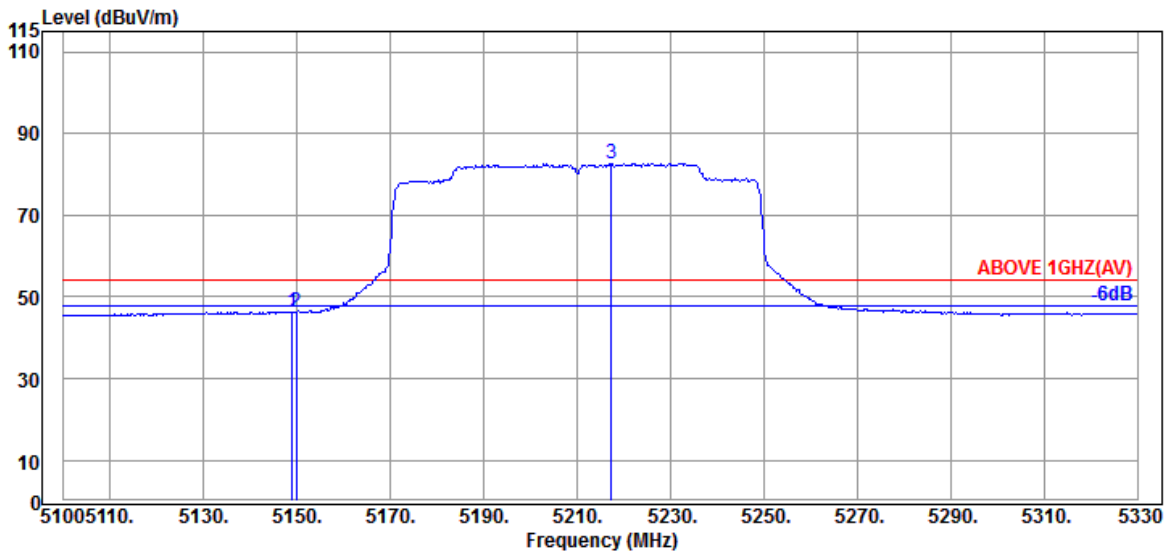


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	33.70	8.88	39.29	43.07	46.36	54.00	7.64	Average
5149.910	33.70	8.88	39.29	42.85	46.14	54.00	7.86	Average
@ 5217.300	33.85	8.93	39.28	79.27	82.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

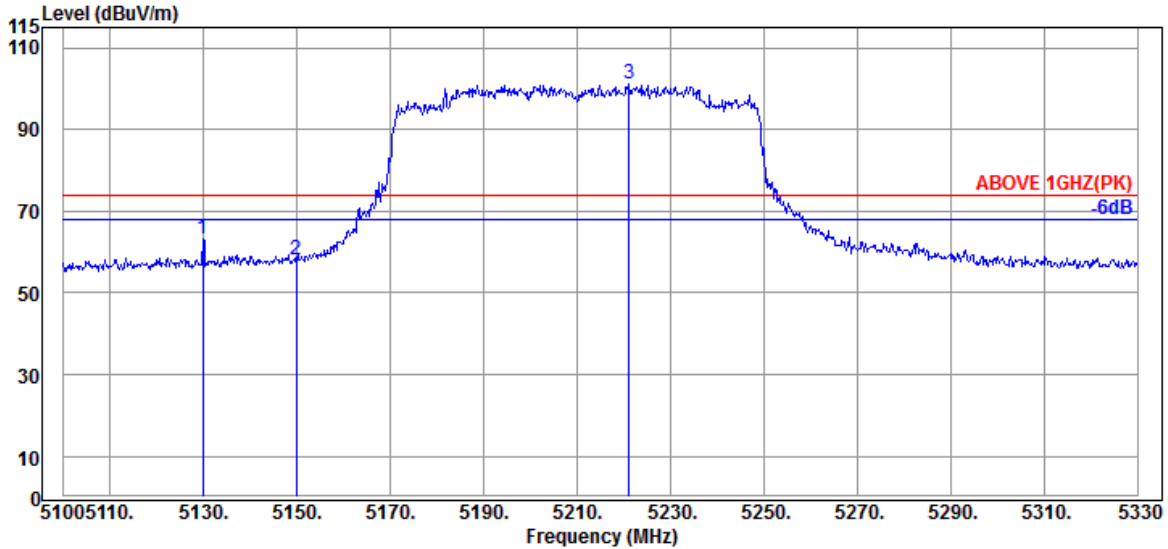

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.900	33.70	8.88	39.29	60.09	63.38	74.00	10.62	Peak
5149.910	33.70	8.88	39.29	54.88	58.17	74.00	15.83	Peak
@ 5221.210	33.85	8.93	39.28	97.55	101.05	---	---	Peak

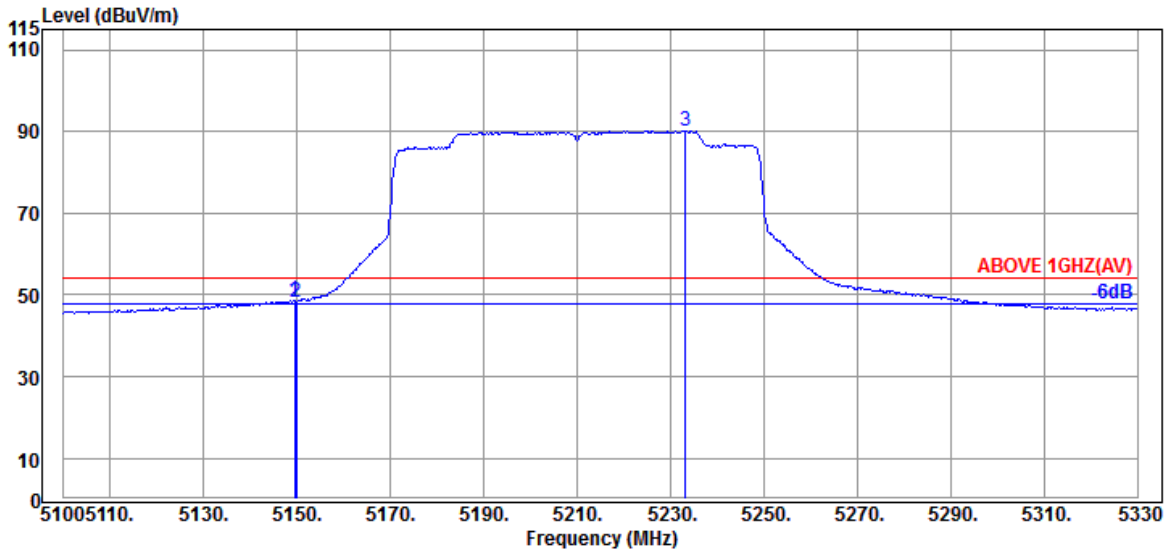


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	33.70	8.88	39.29	45.49	48.78	54.00	5.22	Average
5149.910	33.70	8.88	39.29	45.07	48.36	54.00	5.64	Average
@ 5233.170	33.83	8.93	39.28	86.70	90.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

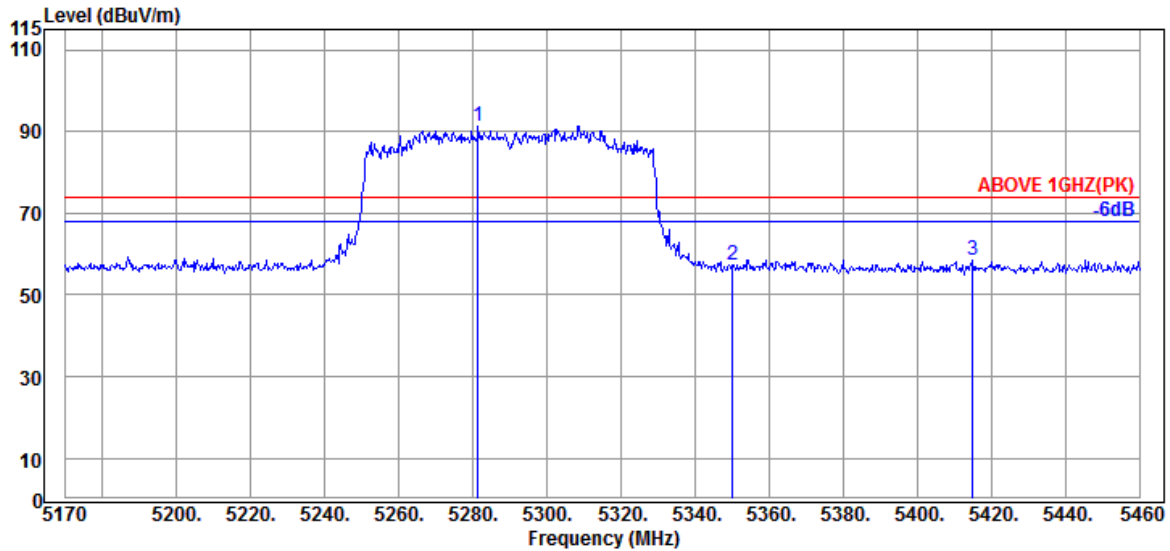

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.360	33.87	8.96	39.28	87.71	91.26	---	---	Peak
5350.090	34.00	8.99	39.27	53.52	57.24	74.00	16.76	Peak
5415.050	34.20	9.03	39.27	54.64	58.60	74.00	15.40	Peak

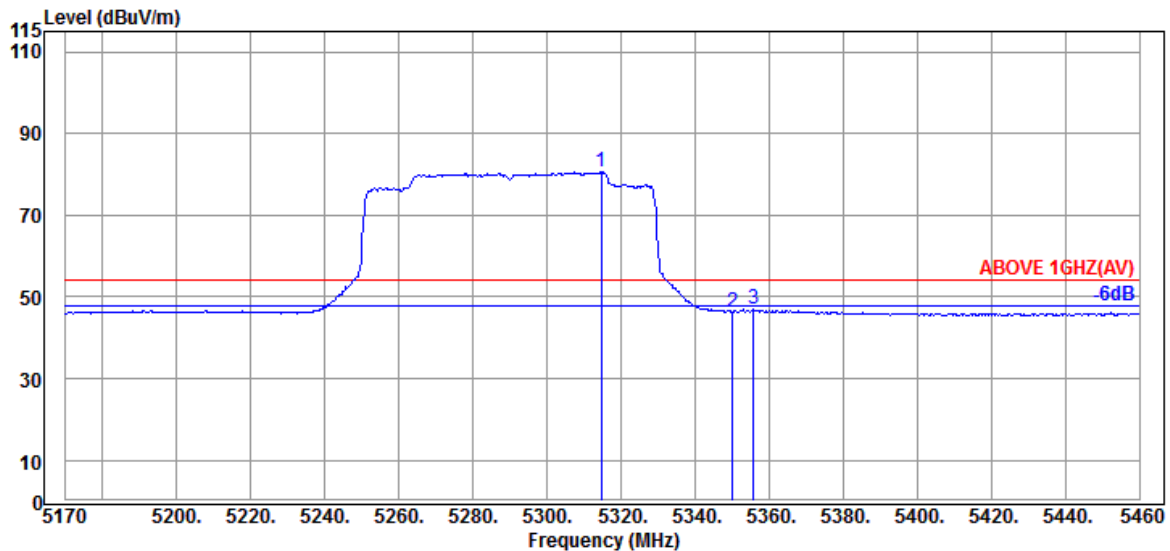


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.710	33.93	8.98	39.27	77.08	80.72	---	---	Average
5350.090	34.00	8.99	39.27	42.69	46.41	54.00	7.59	Average
5355.890	34.07	9.00	39.27	43.06	46.86	54.00	7.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

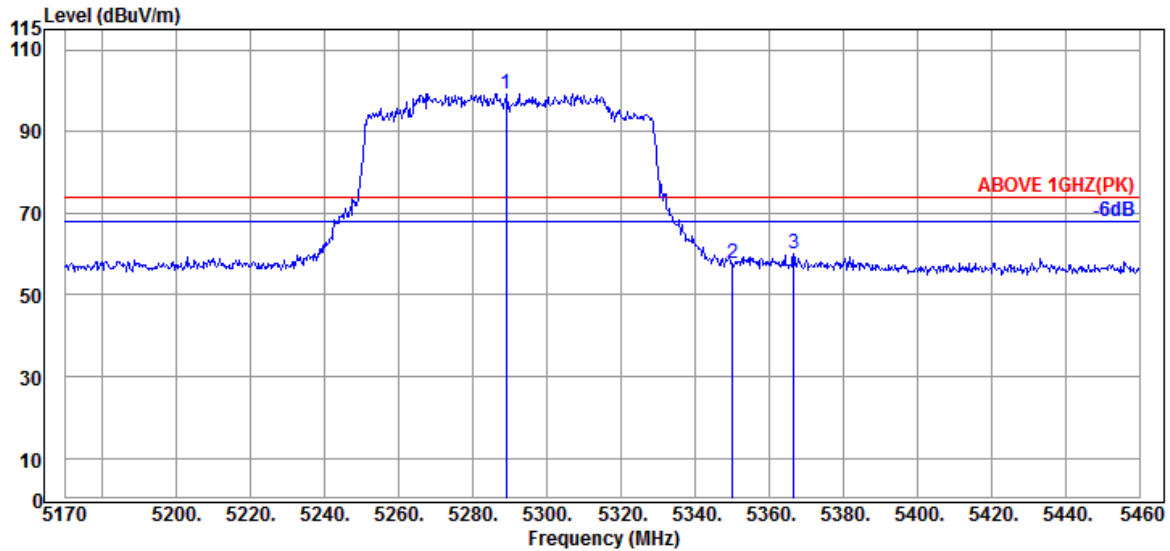

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.900	33.87	8.96	39.28	95.76	99.31	---	---	Peak
5350.090	34.00	8.99	39.27	53.94	57.66	74.00	16.34	Peak
5366.620	34.07	9.00	39.27	56.10	59.90	74.00	14.10	Peak

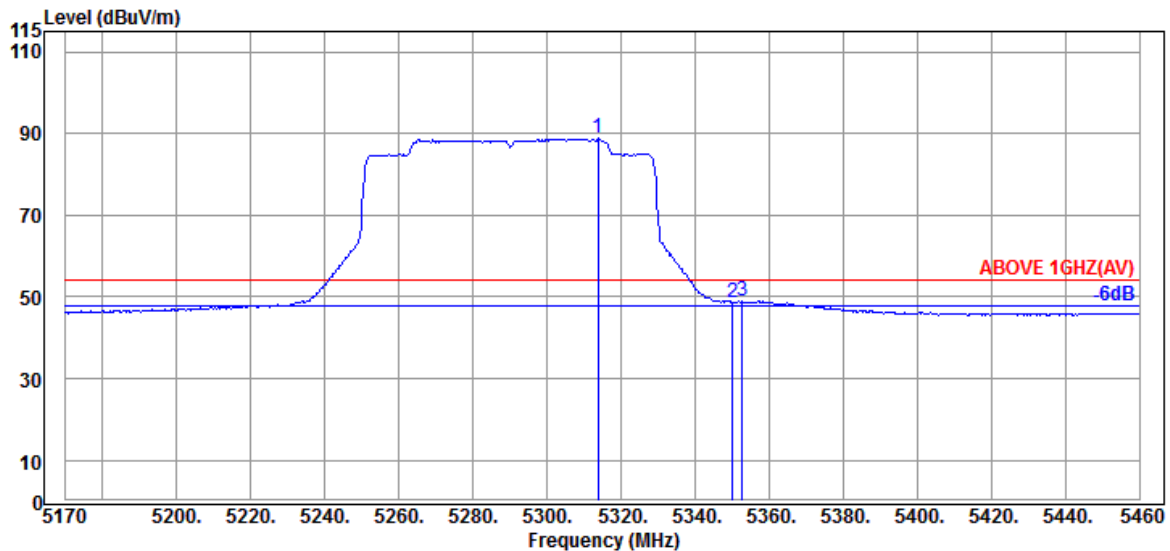


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.840	33.93	8.98	39.27	85.17	88.81	---	---	Average
5350.090	34.00	8.99	39.27	44.91	48.63	54.00	5.37	Average
5352.700	34.00	8.99	39.27	45.17	48.89	54.00	5.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

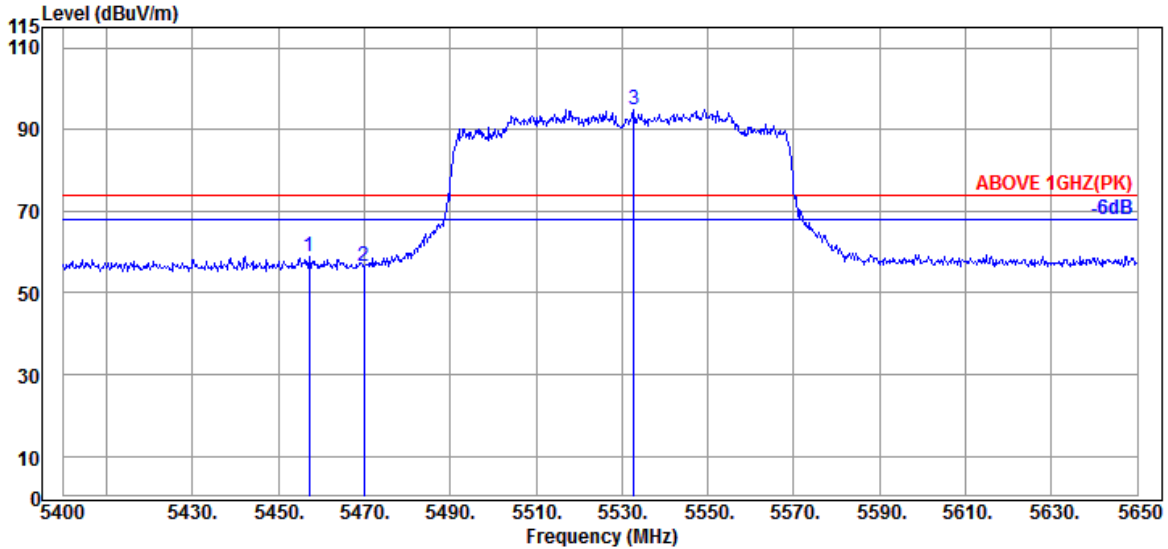

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.250	34.20	9.05	39.26	55.04	59.03	74.00	14.97	Peak
5470.000	34.17	9.06	39.26	52.63	56.60	74.00	17.40	Peak
@ 5532.750	34.03	9.09	39.27	91.15	95.00	---	---	Peak

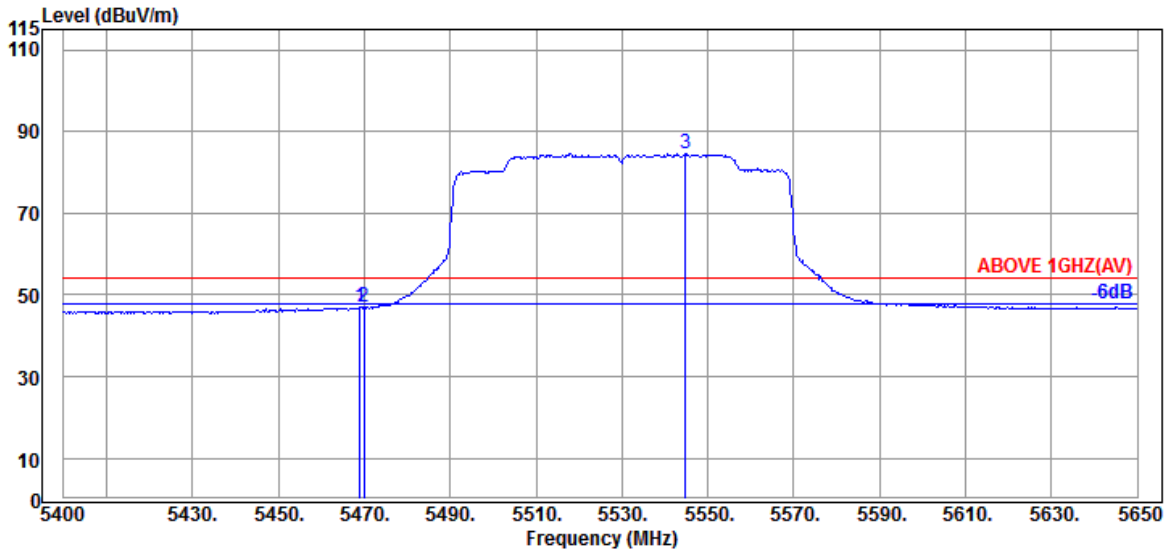


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	42.96	46.93	54.00	7.07	Average
5470.000	34.17	9.06	39.26	42.94	46.91	54.00	7.09	Average
@ 5544.750	34.00	9.10	39.27	80.68	84.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

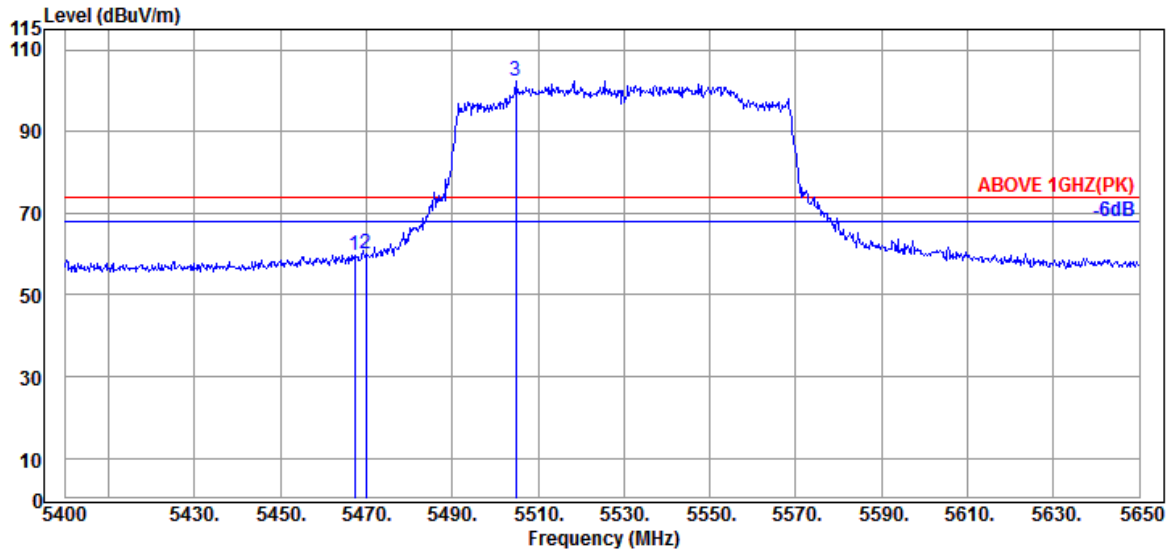

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.17	9.06	39.26	55.76	59.73	74.00	14.27	Peak
5470.000	34.17	9.06	39.26	56.15	60.12	74.00	13.88	Peak
@ 5504.750	34.10	9.08	39.26	98.45	102.37	---	---	Peak

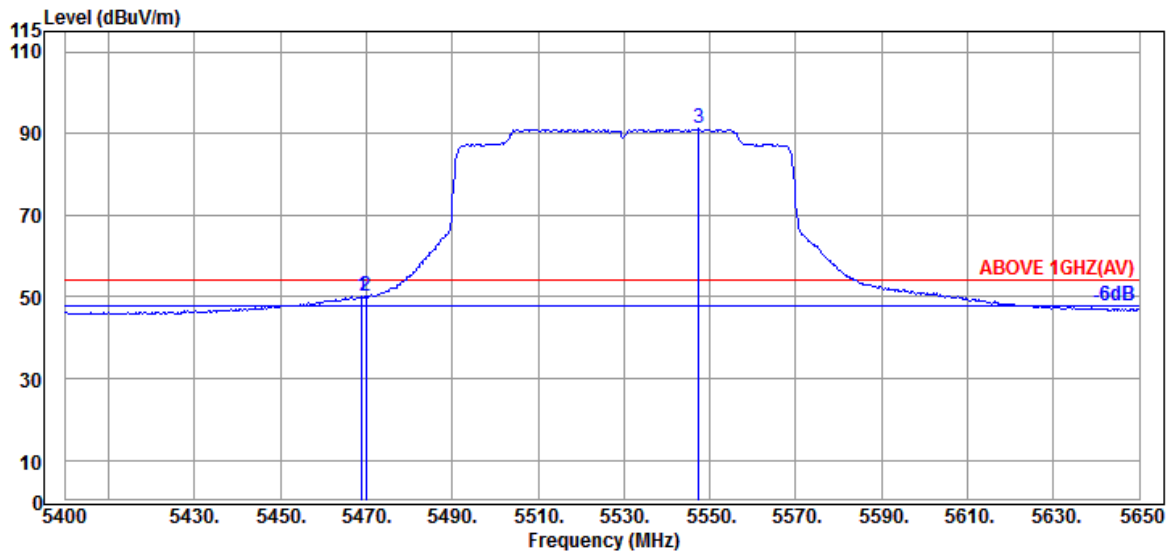


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	46.20	50.17	54.00	3.83	Average
5470.000	34.17	9.06	39.26	46.15	50.12	54.00	3.88	Average
@ 5547.500	34.00	9.10	39.27	87.32	91.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

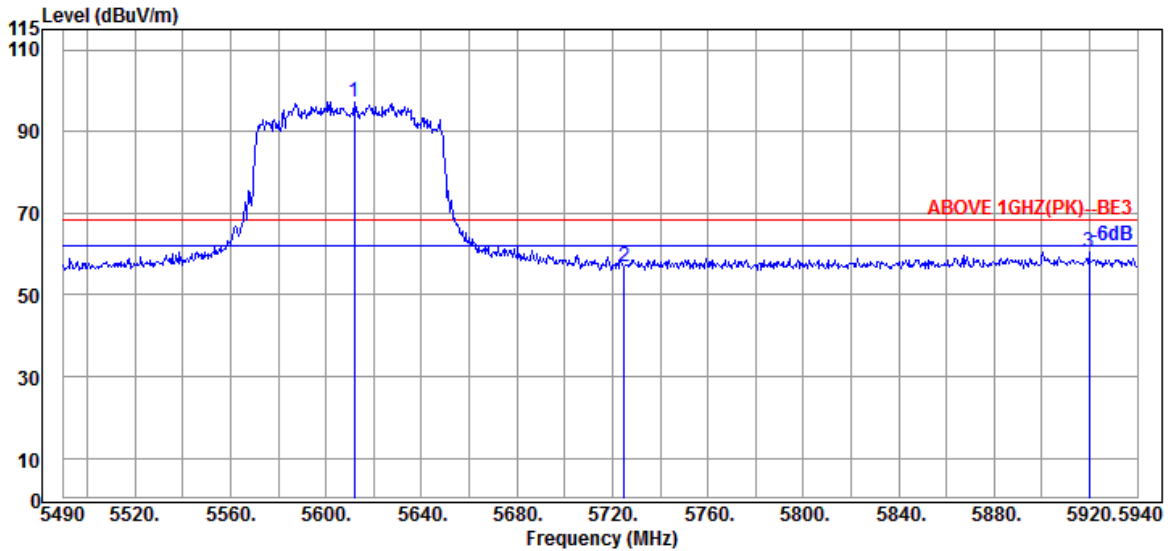

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5611.950	33.97	9.14	39.28	93.47	97.30	---	---	Peak
5724.900	33.90	9.20	39.30	53.03	56.83	68.20	11.37	Peak
5919.750	34.17	9.29	39.35	56.21	60.32	68.20	7.88	Peak

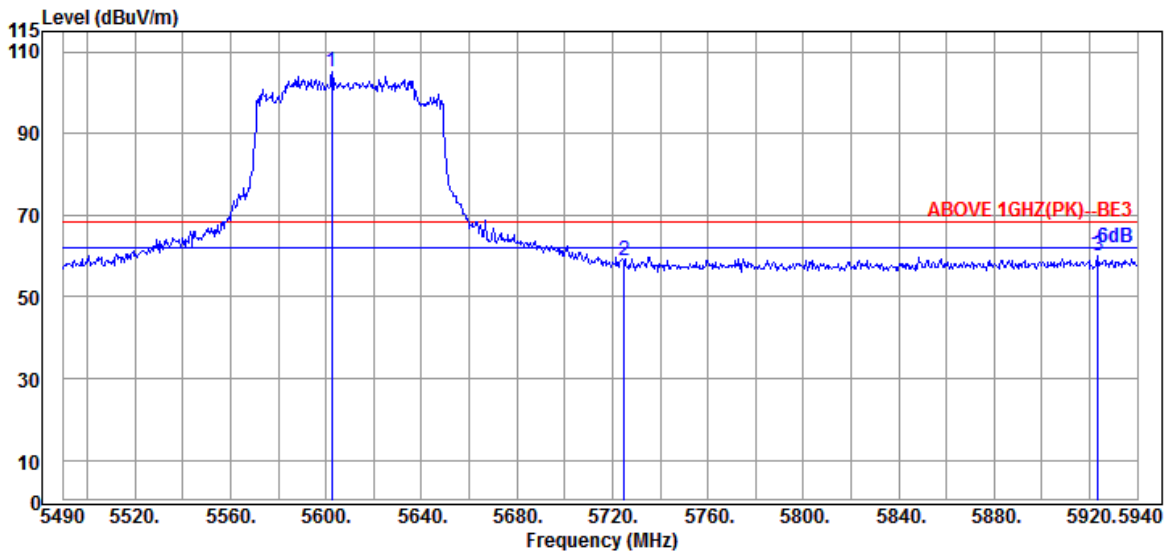

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.500	34.00	9.13	39.28	101.19	105.04	---	---	Peak
5724.900	33.90	9.20	39.30	54.93	58.73	68.20	9.47	Peak
5923.350	34.17	9.29	39.35	55.80	59.91	68.20	8.29	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	37.31	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	36.06	47.46	54.00	6.54	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.37	12.82	39.24	35.44	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.37	12.82	39.24	35.36	47.31	54.00	6.69	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.70	13.09	39.03	34.80	47.56	54.00	6.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.70	13.09	39.03	34.69	47.45	54.00	6.55	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	34.36	47.65	54.00	6.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	35.12	48.41	54.00	5.59	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	13.69	39.18	36.74	50.32	54.00	3.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	13.69	39.18	34.98	48.56	54.00	5.44	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	35.71	47.11	54.00	6.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	35.30	46.70	54.00	7.30	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	35.04	46.95	54.00	7.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	34.57	46.48	54.00	7.52	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.51	39.12	34.75	47.94	54.00	6.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.51	39.12	34.61	47.80	54.00	6.20	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	34.61	47.90	54.00	6.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	34.30	47.59	54.00	6.41	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	13.69	39.18	35.83	49.41	54.00	4.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	13.69	39.18	35.34	48.92	54.00	5.08	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	34.88	46.36	54.00	7.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.33	46.81	54.00	7.19	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.27	12.75	39.30	34.89	46.61	54.00	7.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.27	12.75	39.30	35.43	47.15	54.00	6.85	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.73	13.44	39.11	35.03	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.73	13.44	39.11	34.70	47.76	54.00	6.24	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.87	13.55	39.12	34.14	47.44	54.00	6.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.87	13.55	39.12	34.06	47.36	54.00	6.64	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	13.72	39.20	35.56	49.18	54.00	4.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	13.72	39.20	35.77	49.39	54.00	4.61	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.20	12.66	39.44	35.83	47.25	54.00	6.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.20	12.66	39.44	35.95	47.37	54.00	6.63	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.33	12.77	39.28	35.19	47.01	54.00	6.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.33	12.77	39.28	34.42	46.24	54.00	7.76	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.70	13.30	39.08	34.75	47.67	54.00	6.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.70	13.30	39.08	34.88	47.80	54.00	6.20	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.77	13.48	39.11	34.03	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.77	13.48	39.11	34.54	47.68	54.00	6.32	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	13.65	39.18	35.41	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	13.65	39.18	35.76	49.26	54.00	4.74	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.20	12.73	39.32	35.11	46.72	54.00	7.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.20	12.73	39.32	35.38	46.99	54.00	7.01	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.63	13.23	39.06	34.58	47.38	54.00	6.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.63	13.23	39.06	34.42	47.22	54.00	6.78	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	35.83	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.20	12.64	39.44	36.48	47.88	54.00	6.12	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	34.94	46.85	54.00	7.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	34.62	46.53	54.00	7.47	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.51	39.12	34.59	47.78	54.00	6.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.51	39.12	34.39	47.58	54.00	6.42	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	33.82	47.11	54.00	6.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.87	13.55	39.13	34.60	47.89	54.00	6.11	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.13	13.76	39.21	35.32	49.00	54.00	5.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.13	13.76	39.21	35.52	49.20	54.00	4.80	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.23	46.71	54.00	7.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.56	47.04	54.00	6.96	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.27	12.75	39.30	36.03	47.75	54.00	6.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.27	12.75	39.30	35.69	47.41	54.00	6.59	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.73	13.44	39.11	34.17	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.73	13.44	39.11	34.31	47.37	54.00	6.63	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.87	13.55	39.12	34.24	47.54	54.00	6.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.87	13.55	39.12	33.91	47.21	54.00	6.79	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	13.72	39.20	35.51	49.13	54.00	4.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	13.72	39.20	35.41	49.03	54.00	4.97	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.20	12.66	39.44	35.97	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.20	12.66	39.44	35.80	47.22	54.00	6.78	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.33	12.77	39.28	36.16	47.98	54.00	6.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.33	12.77	39.28	35.23	47.05	54.00	6.95	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.70	13.30	39.08	34.47	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.70	13.30	39.08	34.05	46.97	54.00	7.03	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.77	13.48	39.11	34.08	47.22	54.00	6.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.77	13.48	39.11	34.11	47.25	54.00	6.75	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	13.65	39.18	35.04	48.54	54.00	5.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	13.65	39.18	35.52	49.02	54.00	4.98	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.20	12.73	39.32	35.77	47.38	54.00	6.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.20	12.73	39.32	34.90	46.51	54.00	7.49	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.63	13.23	39.06	34.79	47.59	54.00	6.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.63	13.23	39.06	34.49	47.29	54.00	6.71	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.