

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	86
A.2.3 Emissions in Non-restricted Frequency Bands:.....	88
A.3 6dB OCCUPIED BANDWIDTH	89
A.3.1 Emission Bandwidth Result.....	89
A.3.2 Measurement Plots	91
A.4 MAXIMUM PEAK OUTPUT POWER	98
A.4.1 Peak Output Power	98
A.4.2 Average Output Power (Reporting only).....	102
A.4.3 Measurement Plots	105
A.5 EMISSION LIMITATIONS	107
A.6 POWER SPECTRAL DENSITY	134
A.6.1 Power Spectral Density Result	134
A.6.2 Measurement Plots	136

A.1 CONDUCTED EMISSION

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

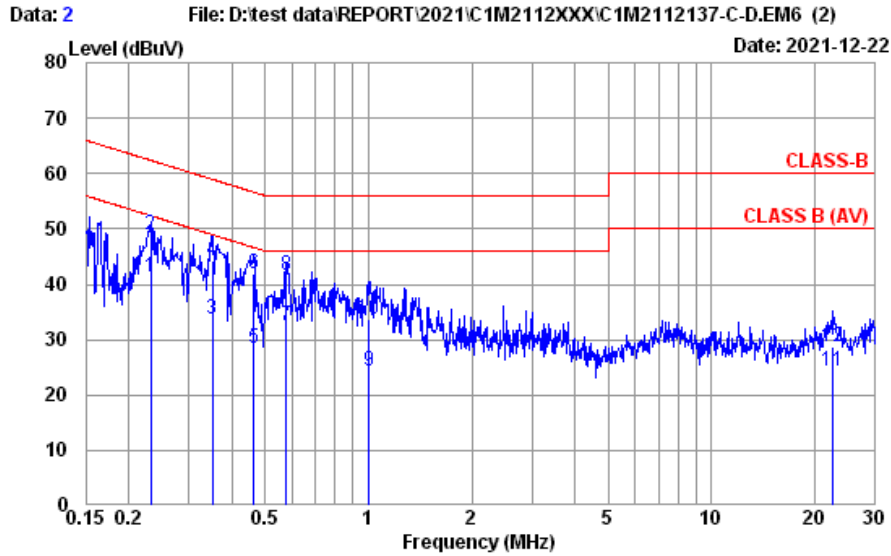


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.232	10.39	0.03	9.85	20.93	41.20	52.39	11.19	Average
2	0.232	10.39	0.03	9.85	28.52	48.79	62.39	13.60	QP
3	0.350	10.37	0.03	9.85	13.56	33.81	48.96	15.15	Average
4	0.350	10.37	0.03	9.85	23.91	44.16	58.96	14.80	QP
5	0.464	10.37	0.03	9.85	8.08	28.33	46.63	18.30	Average
6	0.464	10.37	0.03	9.85	21.60	41.85	56.63	14.78	QP
7	0.576	10.37	0.03	9.85	12.27	32.52	46.00	13.48	Average
8	0.576	10.37	0.03	9.85	21.40	41.65	56.00	14.35	QP
9	1.005	10.38	0.04	9.85	4.05	24.32	46.00	21.68	Average
10	1.005	10.38	0.04	9.85	13.30	33.57	56.00	22.43	QP
11	22.416	11.18	0.20	9.95	2.91	24.24	50.00	25.76	Average
12	22.416	11.18	0.20	9.95	7.36	28.69	60.00	31.31	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

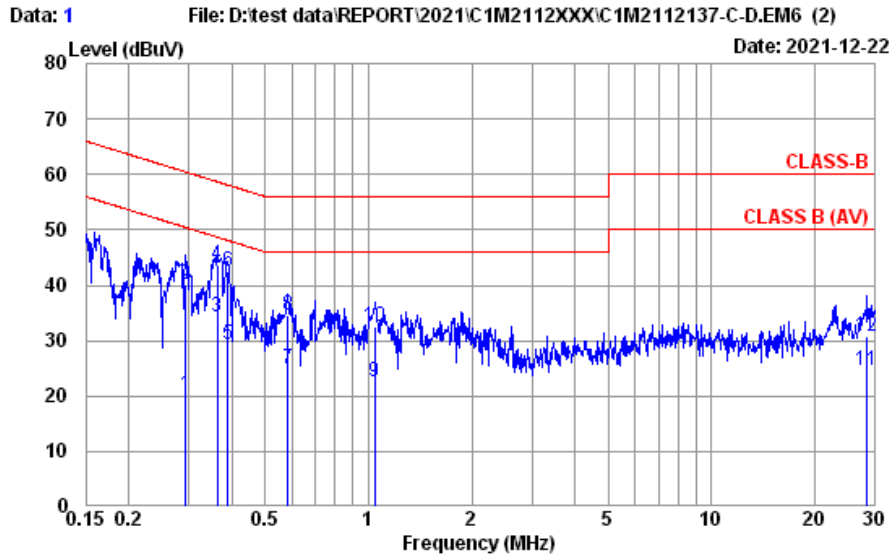

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G900	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.292	10.38	0.03	9.85	0.09	20.35	50.46	30.11	Average
2	0.292	10.38	0.03	9.85	19.99	40.25	60.46	20.21	QP
3	0.363	10.37	0.03	9.85	13.91	34.16	48.65	14.49	Average
4	0.363	10.37	0.03	9.85	23.43	43.68	58.65	14.97	QP
5	0.389	10.37	0.03	9.85	8.91	29.16	48.08	18.92	Average
6	0.389	10.37	0.03	9.85	22.27	42.52	58.08	15.56	QP
7	0.582	10.37	0.03	9.85	4.76	25.01	46.00	20.99	Average
8	0.582	10.37	0.03	9.85	14.44	34.69	56.00	21.31	QP
9	1.043	10.38	0.04	9.85	2.35	22.62	46.00	23.38	Average
10	1.043	10.38	0.04	9.85	12.35	32.62	56.00	23.38	QP
11	28.452	10.86	0.23	10.00	3.65	24.74	50.00	25.26	Average
12	28.452	10.86	0.23	10.00	9.80	30.89	60.00	29.11	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/12/17~2022/01/05	Temp./Hum.	20~24°C/54~62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	38.46	30.49	40.00	9.51	Peak
121.180	17.91	2.54	32.32	49.77	37.90	43.50	5.60	Peak
318.090	19.52	4.55	32.25	48.16	39.98	46.00	6.02	Peak
593.570	24.23	6.75	32.31	37.73	36.40	46.00	9.60	Peak
742.950	25.30	7.51	32.01	36.73	37.53	46.00	8.47	Peak
962.170	26.83	8.78	30.89	32.23	36.95	54.00	17.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	45.91	37.94	40.00	2.06	Peak
89.170	14.60	2.14	32.36	54.74	39.12	43.50	4.38	Peak
318.090	19.52	4.55	32.25	48.59	40.41	46.00	5.59	Peak
599.390	24.30	6.77	32.31	35.30	34.06	46.00	11.94	Peak
742.950	25.30	7.51	32.01	43.28	44.08	46.00	1.92	Peak
971.870	26.91	8.83	30.81	33.48	38.41	54.00	15.59	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	38.54	30.57	40.00	9.43	Peak
121.180	17.91	2.54	32.32	50.31	38.44	43.50	5.06	Peak
318.090	19.52	4.55	32.25	46.70	38.52	46.00	7.48	Peak
561.560	23.87	6.65	32.28	37.83	36.07	46.00	9.93	Peak
742.950	25.30	7.51	32.01	42.89	43.69	46.00	2.31	Peak
969.930	26.88	8.81	30.81	32.69	37.57	54.00	16.43	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	45.32	37.35	40.00	2.65	Peak
105.660	16.96	2.35	32.34	51.31	38.28	43.50	5.22	Peak
318.090	19.52	4.55	32.25	49.37	41.19	46.00	4.81	Peak
594.540	24.25	6.76	32.31	35.64	34.34	46.00	11.66	Peak
742.950	25.30	7.51	32.01	42.35	43.15	46.00	2.85	Peak
961.200	26.83	8.78	30.89	34.40	39.12	54.00	14.88	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

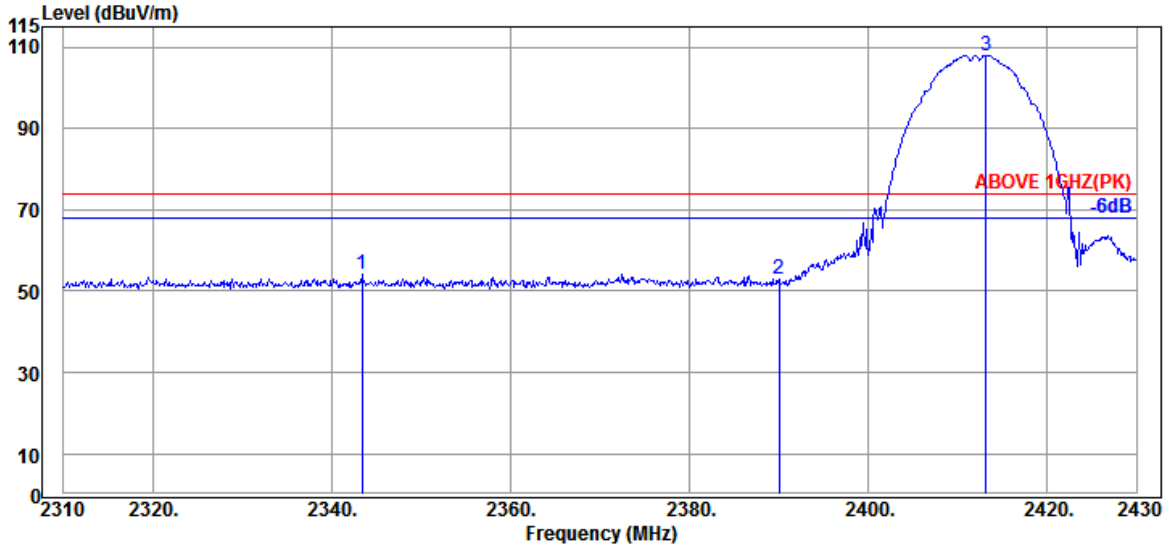

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2343.360	27.50	5.96	33.23	54.06	54.29	74.00	19.71	Peak
2390.040	27.57	6.04	33.19	52.65	53.07	74.00	20.93	Peak
@ 2413.200	27.66	6.07	33.17	107.44	108.00	---	---	Peak

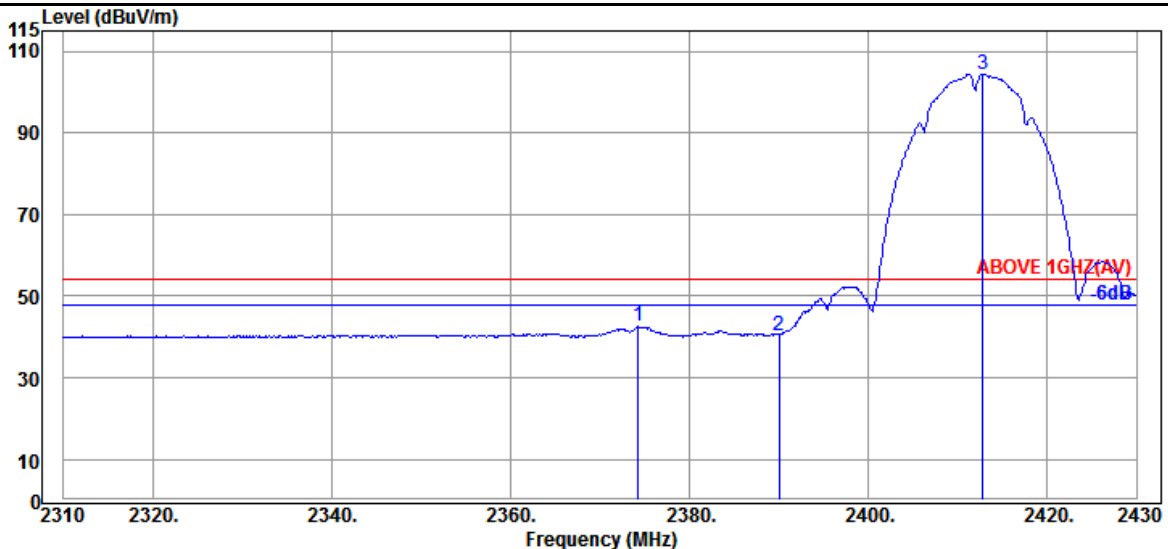


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.320	27.54	6.01	33.21	42.15	42.49	54.00	11.51	Average
2390.040	27.57	6.04	33.19	40.05	40.47	54.00	13.53	Average
@ 2412.840	27.66	6.07	33.17	103.92	104.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

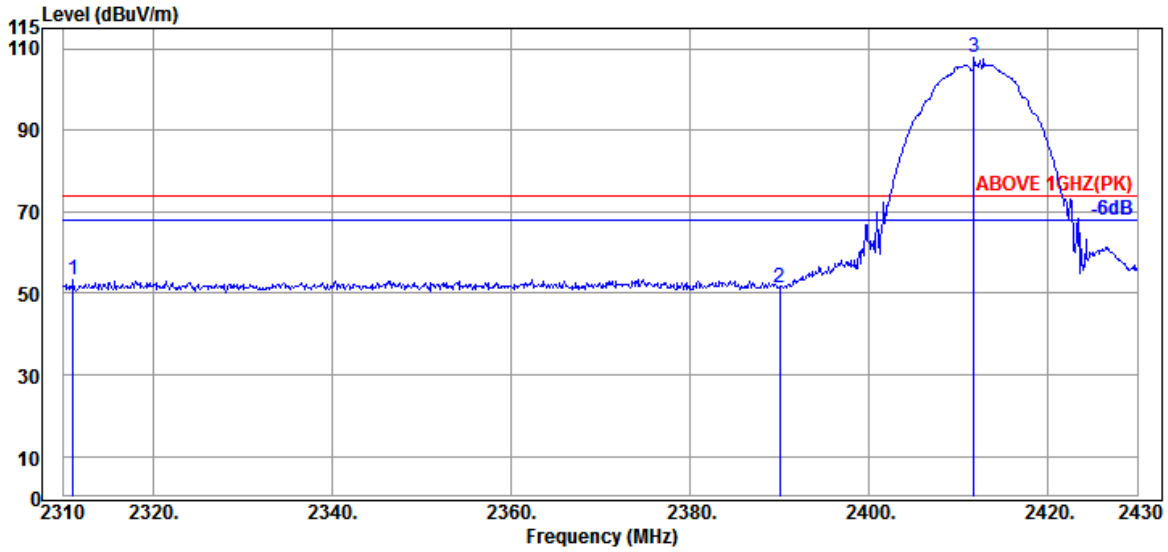

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2311.080	27.50	5.90	33.26	53.12	53.26	74.00	20.74	Peak
2390.040	27.57	6.04	33.19	50.85	51.27	74.00	22.73	Peak
@ 2411.760	27.66	6.07	33.17	107.41	107.97	---	---	Peak

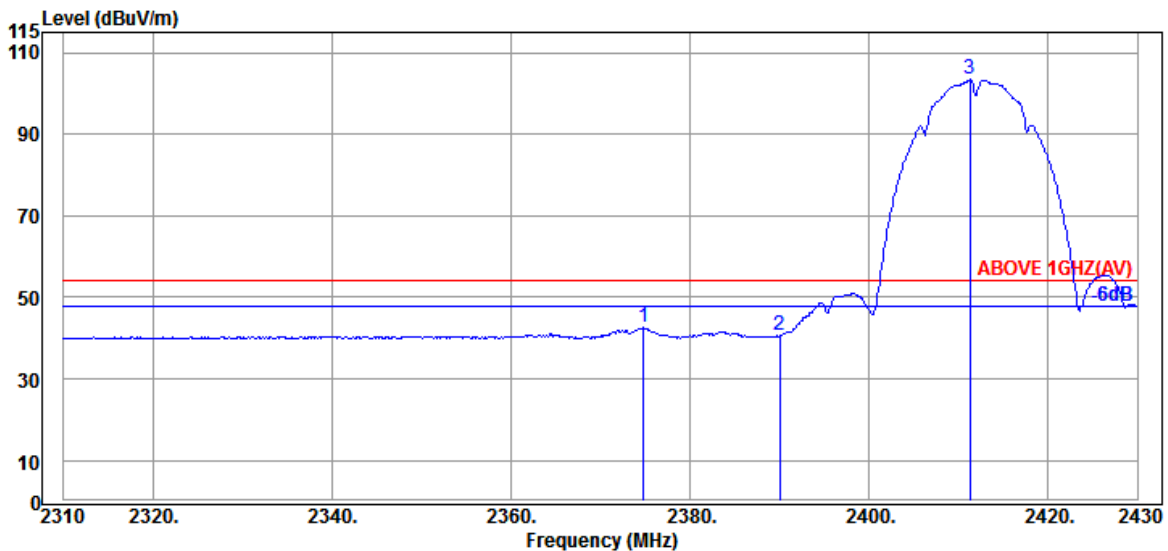


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.800	27.54	6.01	33.21	42.17	42.51	54.00	11.49	Average
2390.040	27.57	6.04	33.19	40.10	40.52	54.00	13.48	Average
@ 2411.280	27.66	6.07	33.17	102.82	103.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

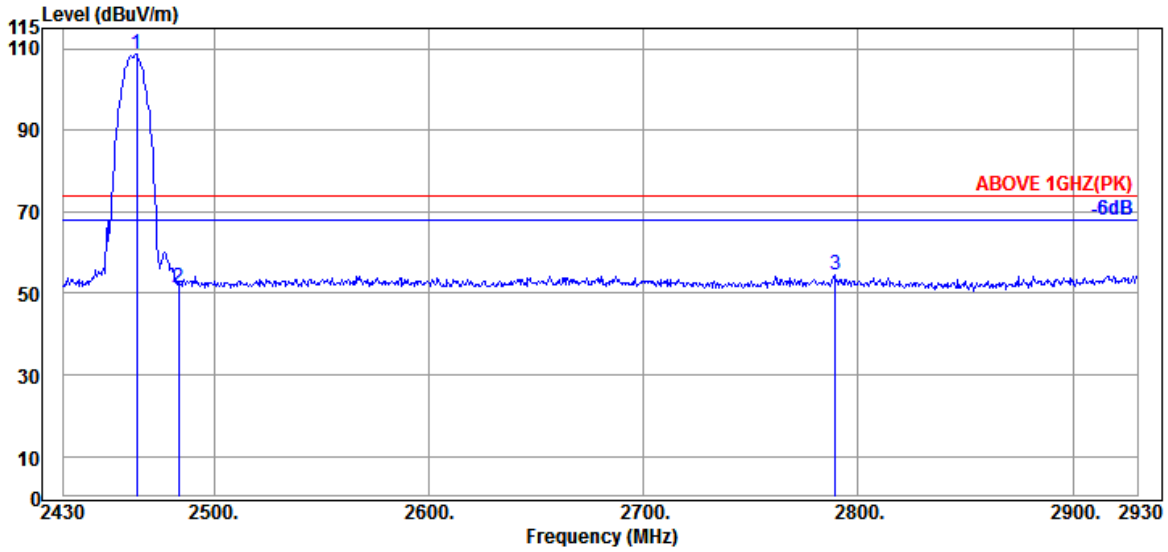

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	27.89	6.15	33.13	107.63	108.54	---	---	Peak
2483.500	28.01	6.18	33.11	50.16	51.24	74.00	22.76	Peak
2789.500	28.82	6.58	32.89	52.18	54.69	74.00	19.31	Peak

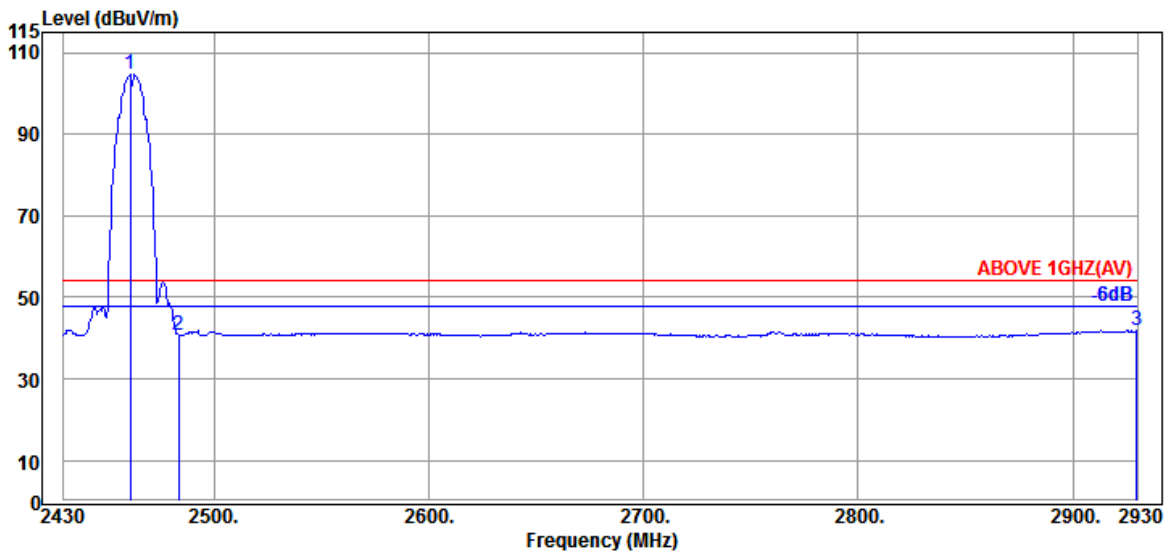


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	104.01	104.92	---	---	Average
2483.500	28.01	6.18	33.11	39.71	40.79	54.00	13.21	Average
2929.500	29.20	6.77	32.79	38.65	41.83	54.00	12.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

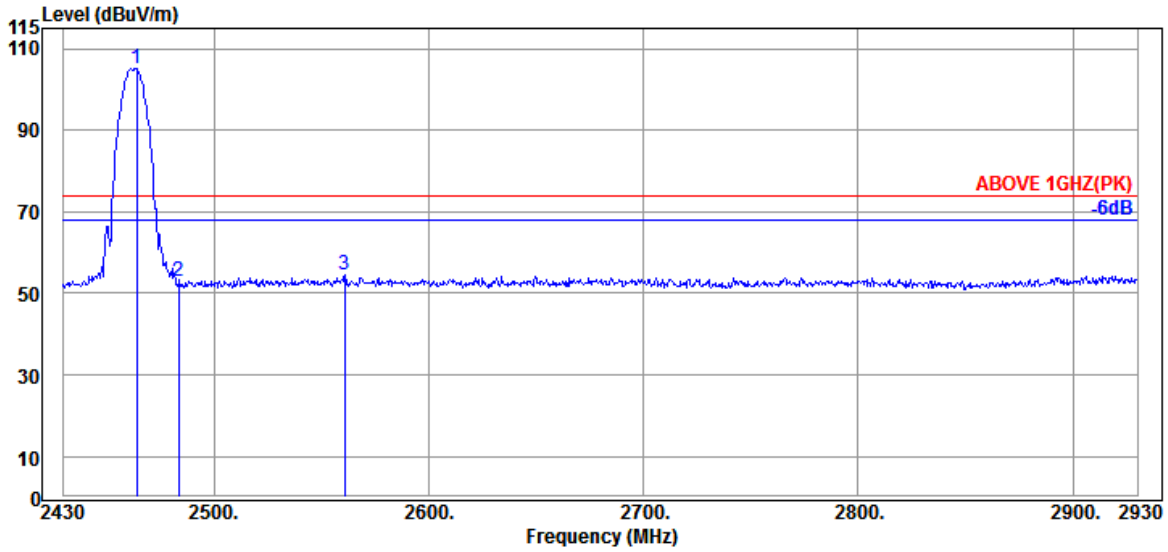

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	27.89	6.15	33.13	104.31	105.22	---	---	Peak
2483.500	28.01	6.18	33.11	51.75	52.83	74.00	21.17	Peak
2561.000	28.24	6.30	33.06	52.90	54.38	74.00	19.62	Peak

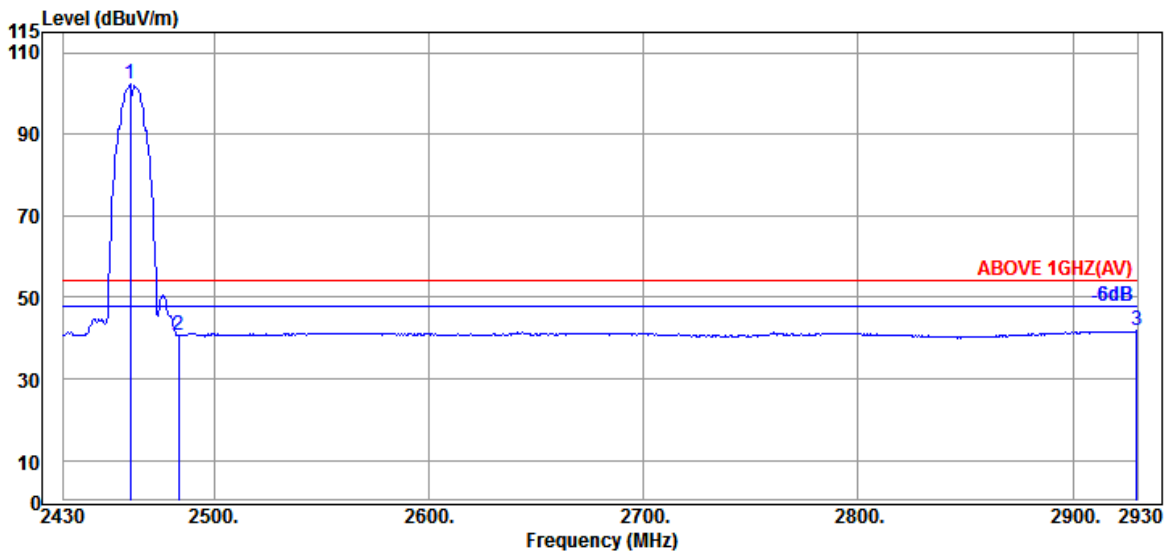


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	101.32	102.23	---	---	Average
2483.500	28.01	6.18	33.11	39.67	40.75	54.00	13.25	Average
2929.500	29.20	6.77	32.79	38.65	41.83	54.00	12.17	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

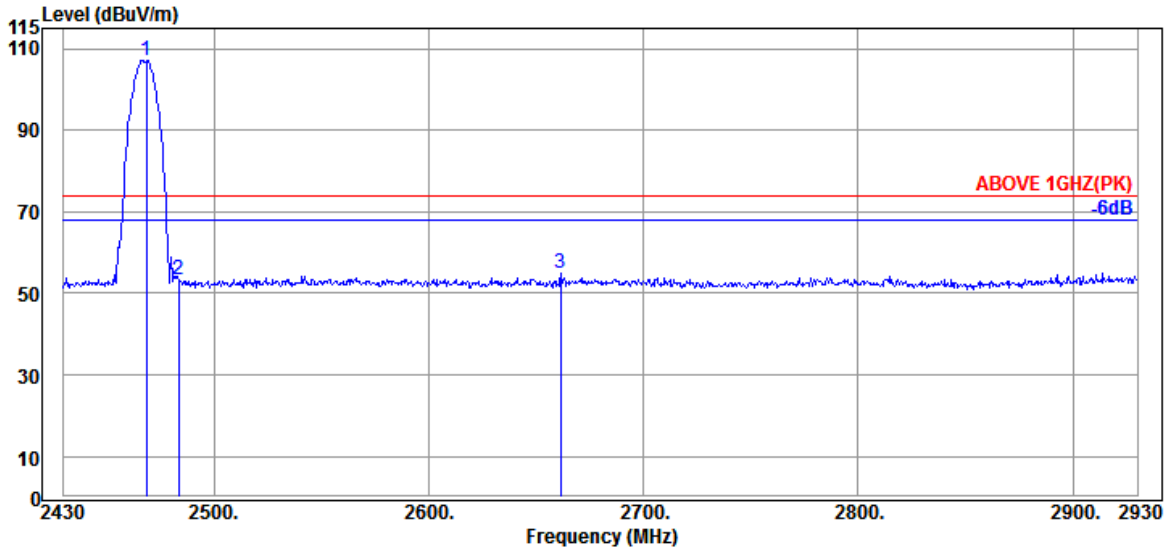

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	106.32	107.27	---	---	Peak
2483.500	28.01	6.18	33.11	52.21	53.29	74.00	20.71	Peak
2661.500	28.83	6.43	32.98	52.68	54.96	74.00	19.04	Peak

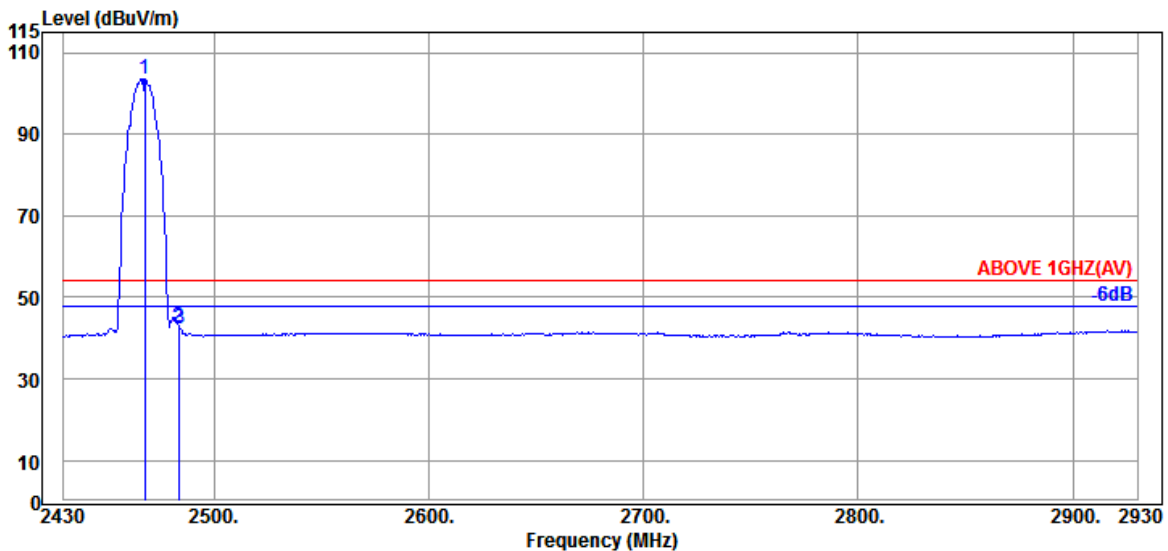


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	27.93	6.15	33.13	102.73	103.68	---	---	Average
2483.500	28.01	6.18	33.11	41.50	42.58	54.00	11.42	Average
2484.000	28.01	6.18	33.11	41.14	42.22	54.00	11.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

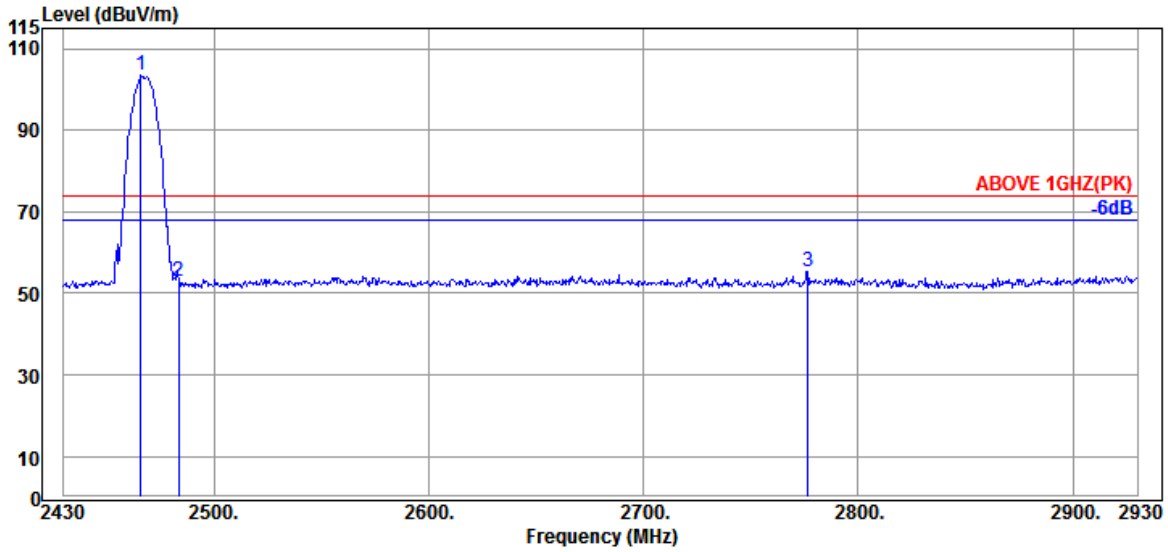

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	102.70	103.61	---	---	Peak
2483.500	28.01	6.18	33.11	51.95	53.03	74.00	20.97	Peak
2776.500	28.85	6.56	32.90	52.68	55.19	74.00	18.81	Peak

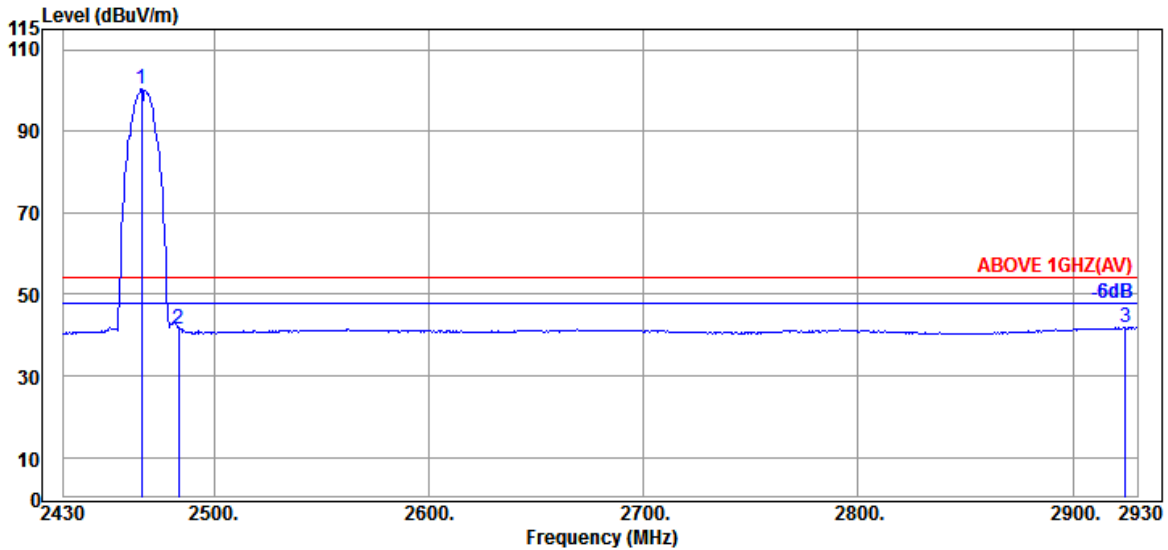


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	99.35	100.26	---	---	Average
2483.500	28.01	6.18	33.11	40.57	41.65	54.00	12.35	Average
2924.500	29.20	6.75	32.80	38.69	41.84	54.00	12.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

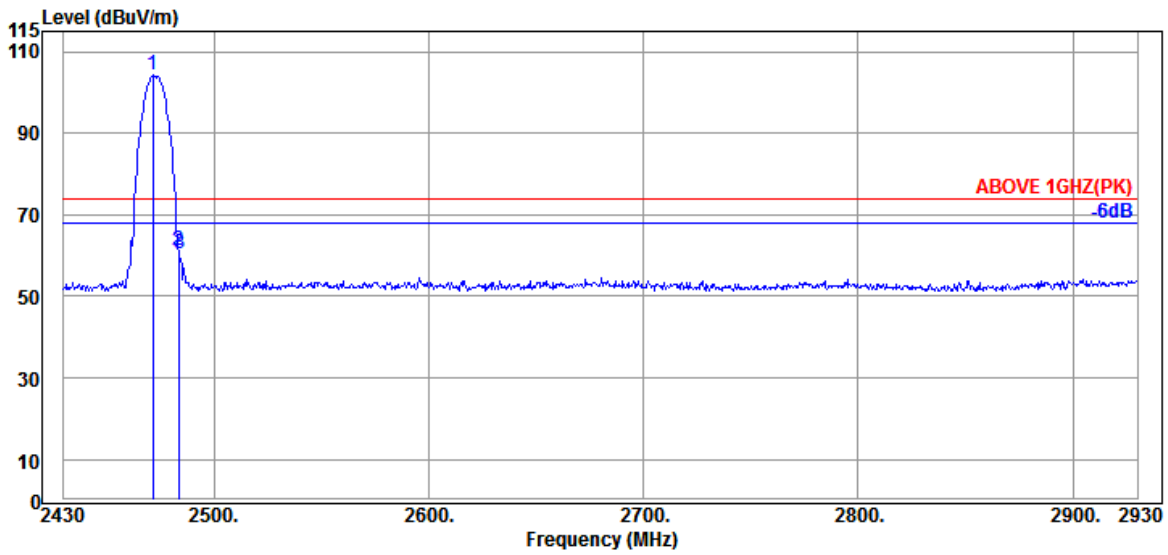

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	103.24	104.22	---	---	Peak
2483.500	28.01	6.18	33.11	60.18	61.26	74.00	12.74	Peak
2484.000	28.01	6.18	33.11	59.57	60.65	74.00	13.35	Peak

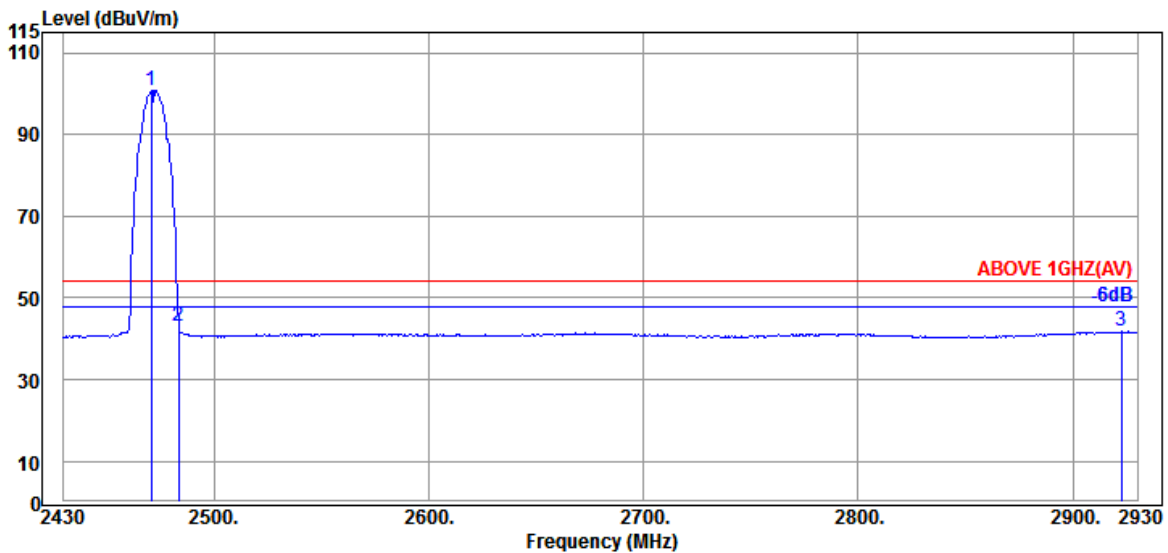


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	27.93	6.18	33.13	99.96	100.94	---	---	Average
2483.500	28.01	6.18	33.11	42.05	43.13	54.00	10.87	Average
2922.500	29.20	6.75	32.80	38.63	41.78	54.00	12.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

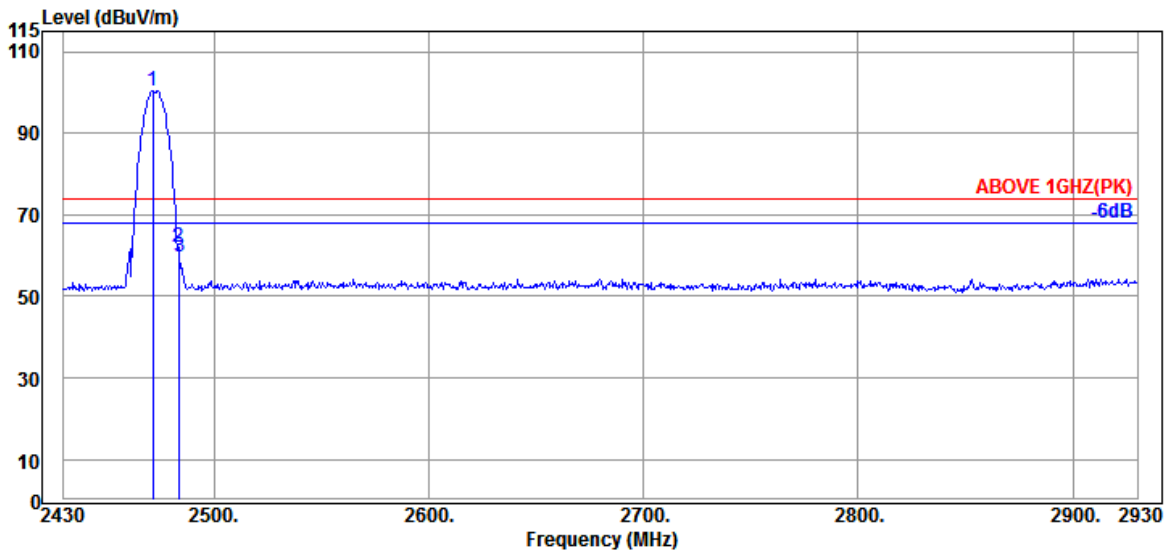

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	99.33	100.31	---	---	Peak
2483.500	28.01	6.18	33.11	60.79	61.87	74.00	12.13	Peak
2484.000	28.01	6.18	33.11	58.78	59.86	74.00	14.14	Peak

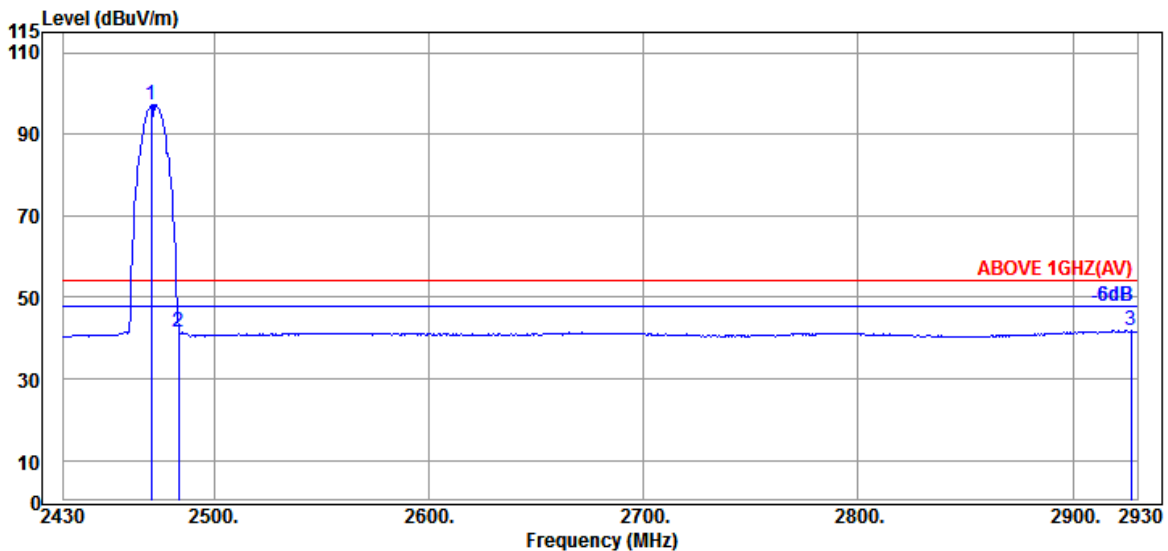


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	27.93	6.18	33.13	96.39	97.37	---	---	Average
2483.500	28.01	6.18	33.11	40.45	41.53	54.00	12.47	Average
2927.000	29.20	6.75	32.79	38.73	41.89	54.00	12.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

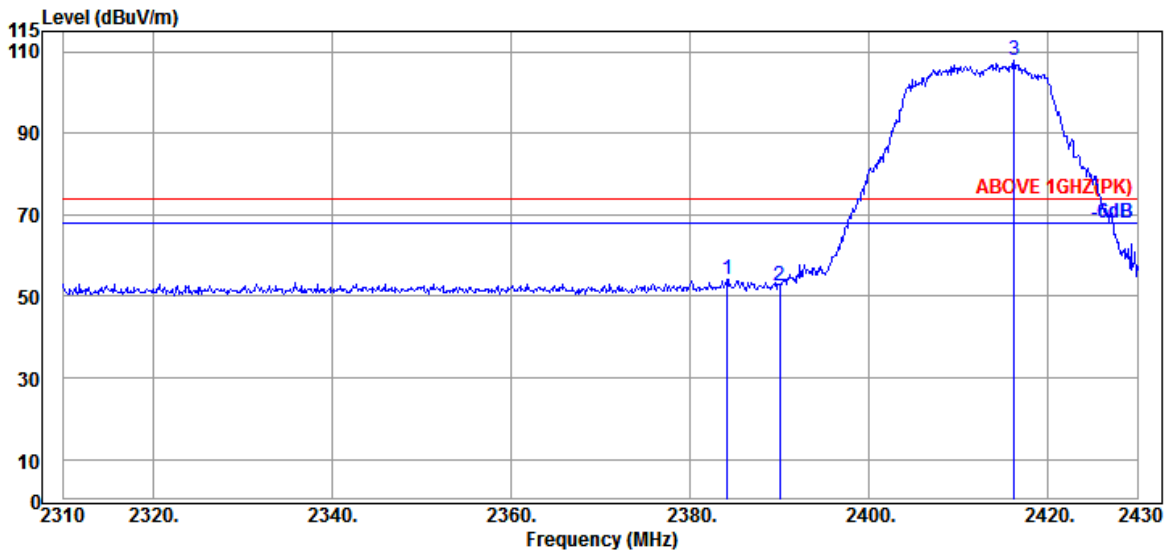

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.160	27.57	6.01	33.20	53.82	54.20	74.00	19.80	Peak
2390.040	27.57	6.04	33.19	52.00	52.42	74.00	21.58	Peak
@ 2416.200	27.66	6.07	33.17	107.19	107.75	---	---	Peak

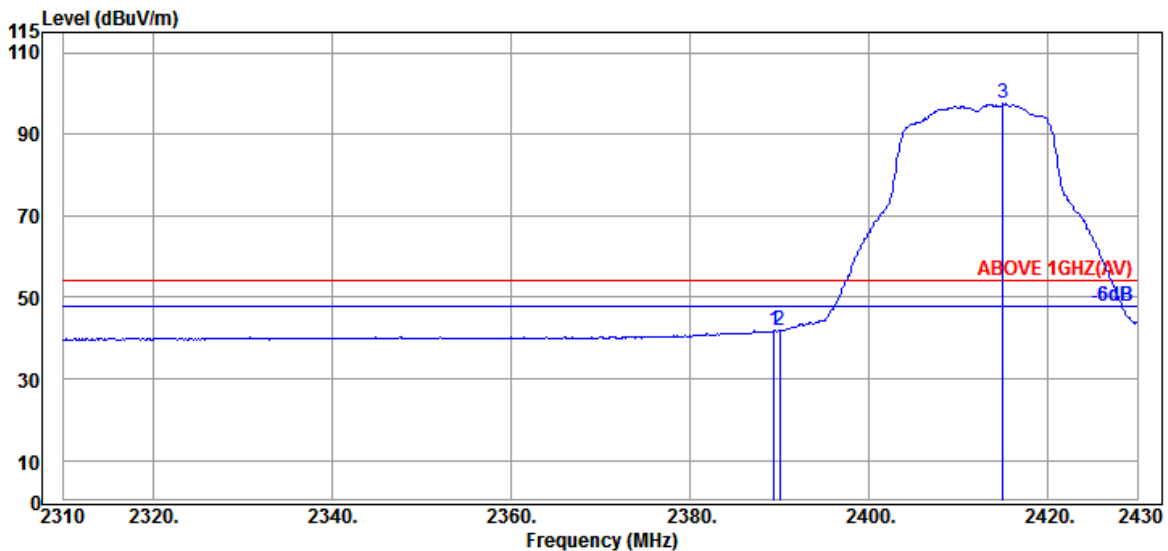


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	27.57	6.04	33.19	41.48	41.90	54.00	12.10	Average
2390.040	27.57	6.04	33.19	41.52	41.94	54.00	12.06	Average
@ 2415.000	27.66	6.07	33.17	96.93	97.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

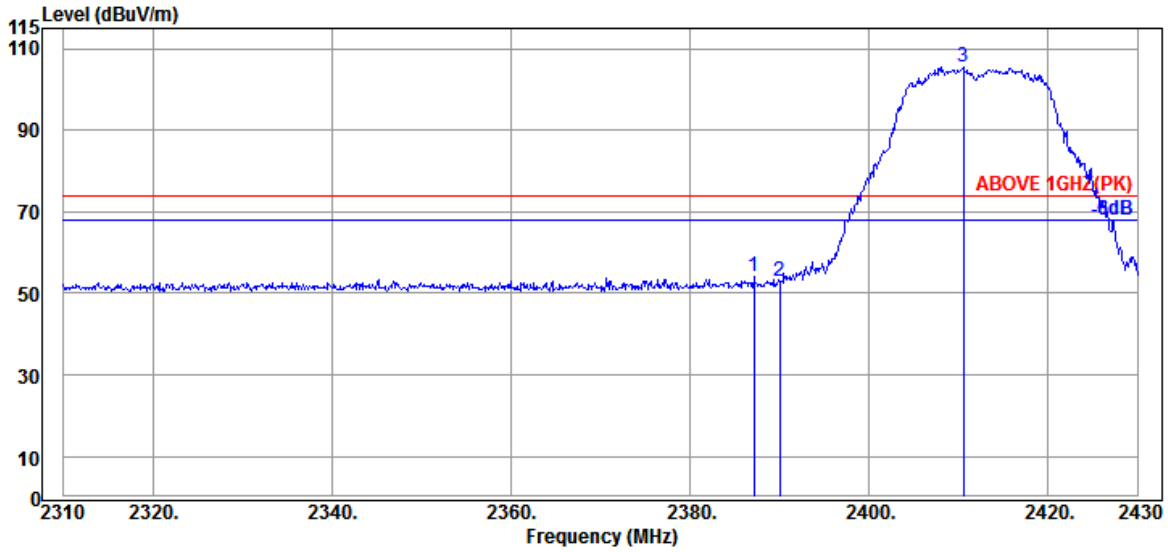

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.160	27.57	6.04	33.19	53.80	54.22	74.00	19.78	Peak
2390.040	27.57	6.04	33.19	52.45	52.87	74.00	21.13	Peak
@ 2410.560	27.63	6.07	33.18	105.01	105.53	---	---	Peak

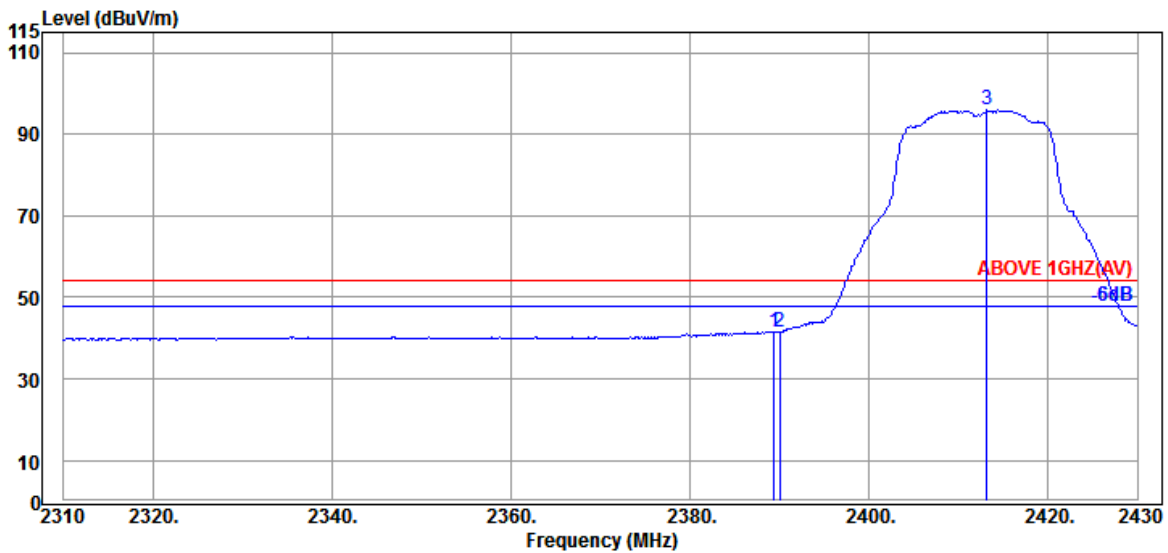


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	27.57	6.04	33.19	41.21	41.63	54.00	12.37	Average
2390.040	27.57	6.04	33.19	41.19	41.61	54.00	12.39	Average
@ 2413.200	27.66	6.07	33.17	95.29	95.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

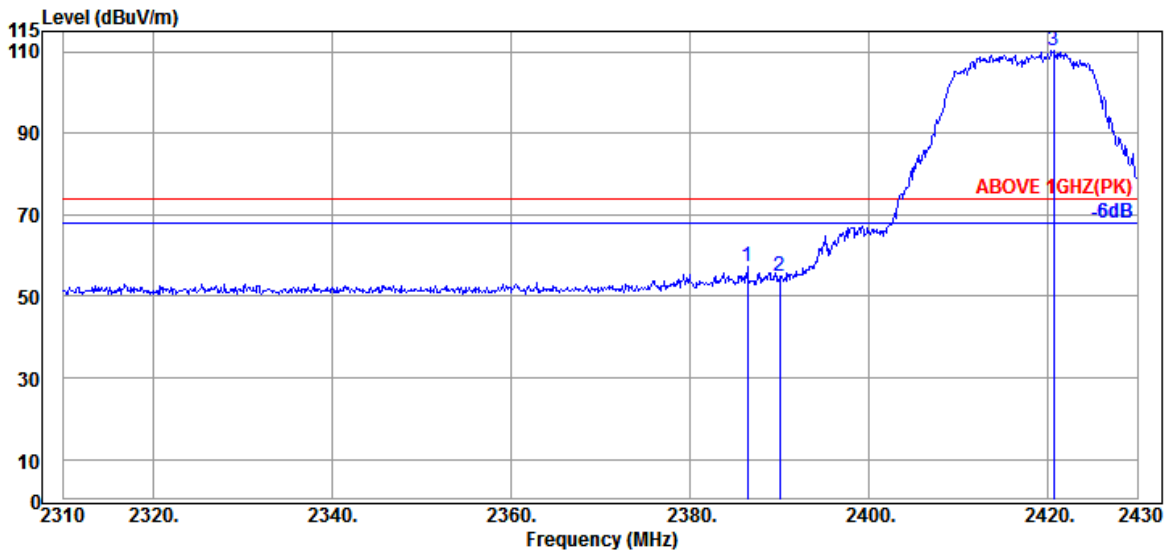

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.440	27.57	6.04	33.20	56.80	57.21	74.00	16.79	Peak
2390.040	27.57	6.04	33.19	54.57	54.99	74.00	19.01	Peak
@ 2420.640	27.69	6.10	33.17	109.57	110.19	---	---	Peak

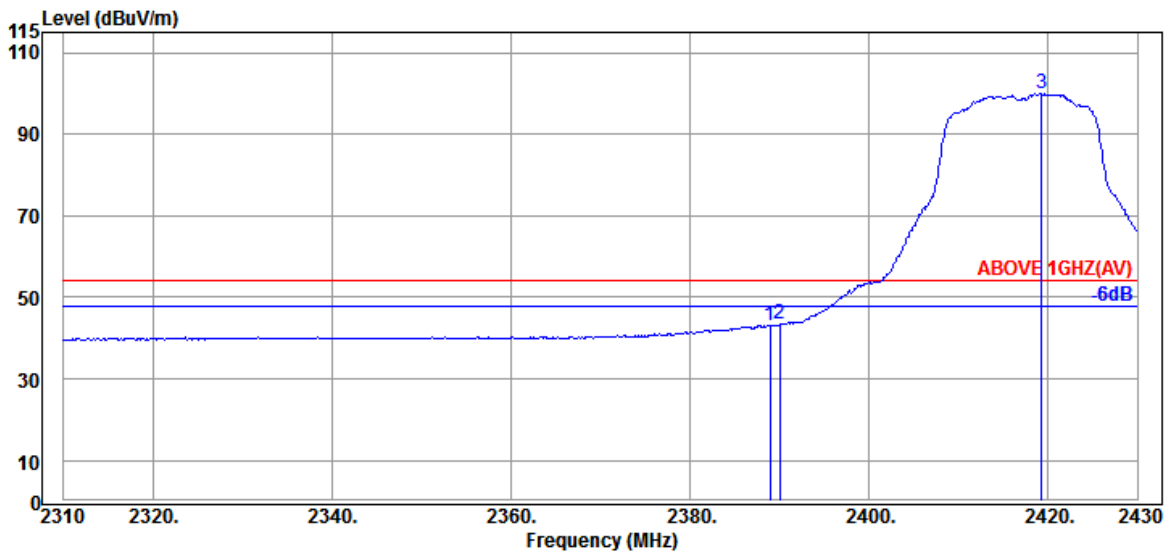


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	27.57	6.04	33.19	42.74	43.16	54.00	10.84	Average
2390.040	27.57	6.04	33.19	42.86	43.28	54.00	10.72	Average
@ 2419.320	27.69	6.07	33.17	99.34	99.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

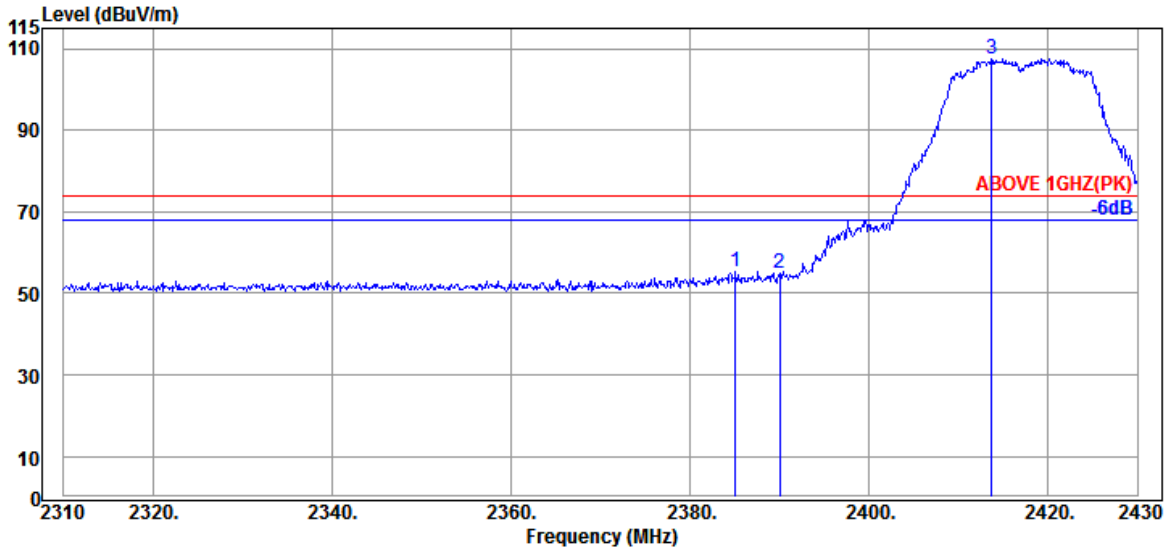

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.120	27.57	6.01	33.20	55.04	55.42	74.00	18.58	Peak
2390.040	27.57	6.04	33.19	54.61	55.03	74.00	18.97	Peak
@ 2413.680	27.66	6.07	33.17	107.10	107.66	---	---	Peak

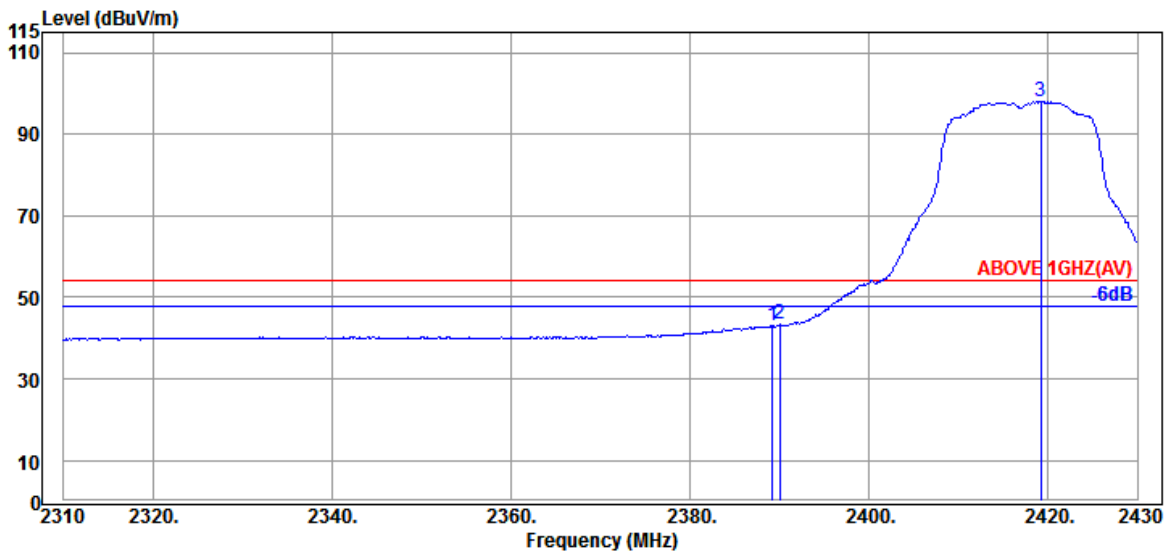


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	42.55	42.97	54.00	11.03	Average
2390.040	27.57	6.04	33.19	42.92	43.34	54.00	10.66	Average
@ 2419.200	27.69	6.07	33.17	97.39	97.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

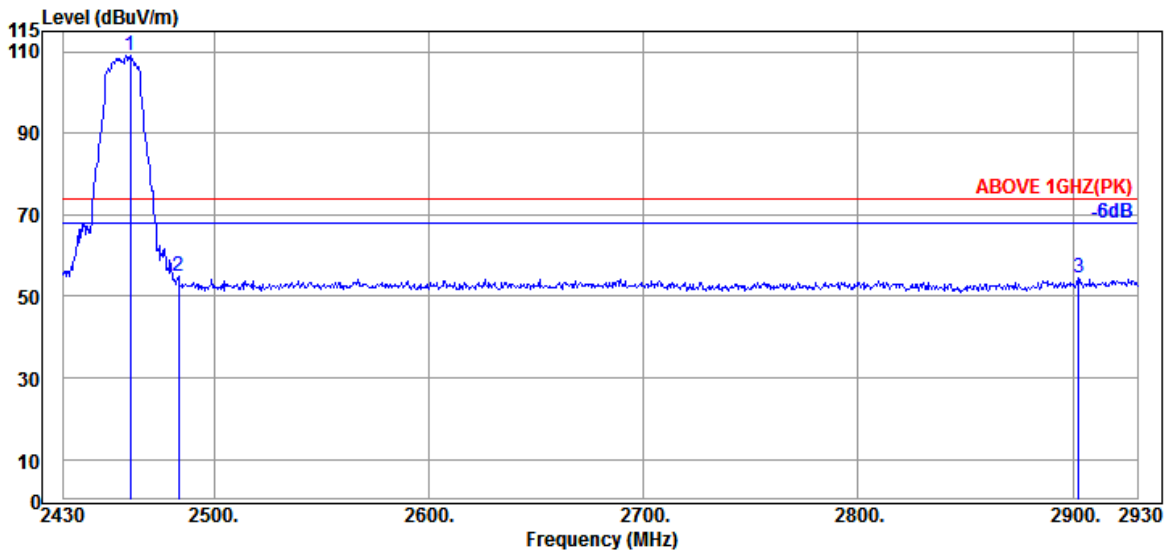

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	108.10	109.01	---	---	Peak
2483.500	28.01	6.18	33.11	53.77	54.85	74.00	19.15	Peak
2902.500	29.20	6.73	32.81	51.29	54.41	74.00	19.59	Peak

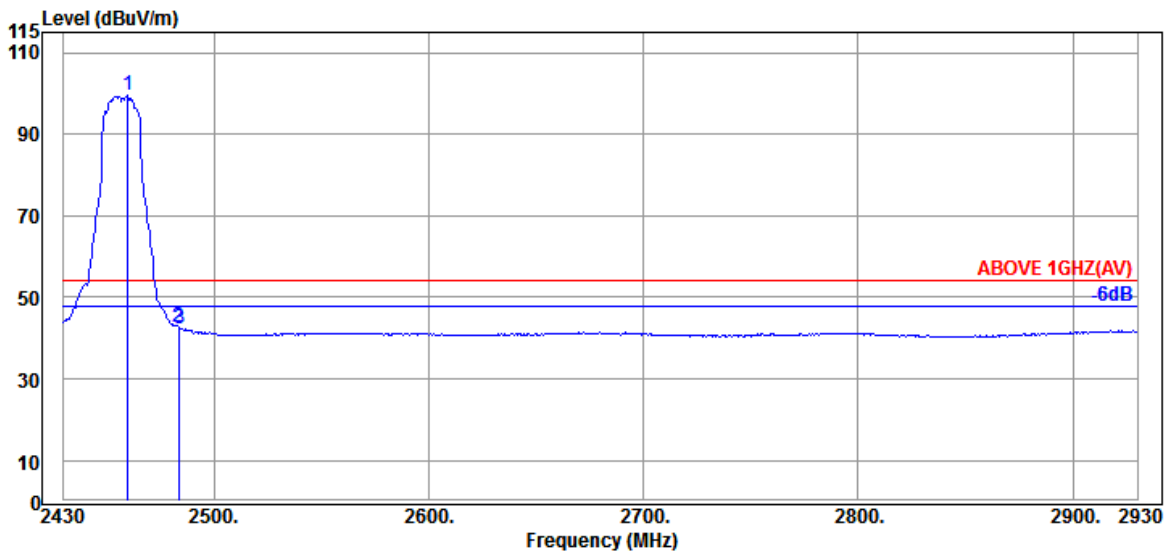


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	98.55	99.41	---	---	Average
2483.500	28.01	6.18	33.11	41.56	42.64	54.00	11.36	Average
2484.000	28.01	6.18	33.11	41.34	42.42	54.00	11.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

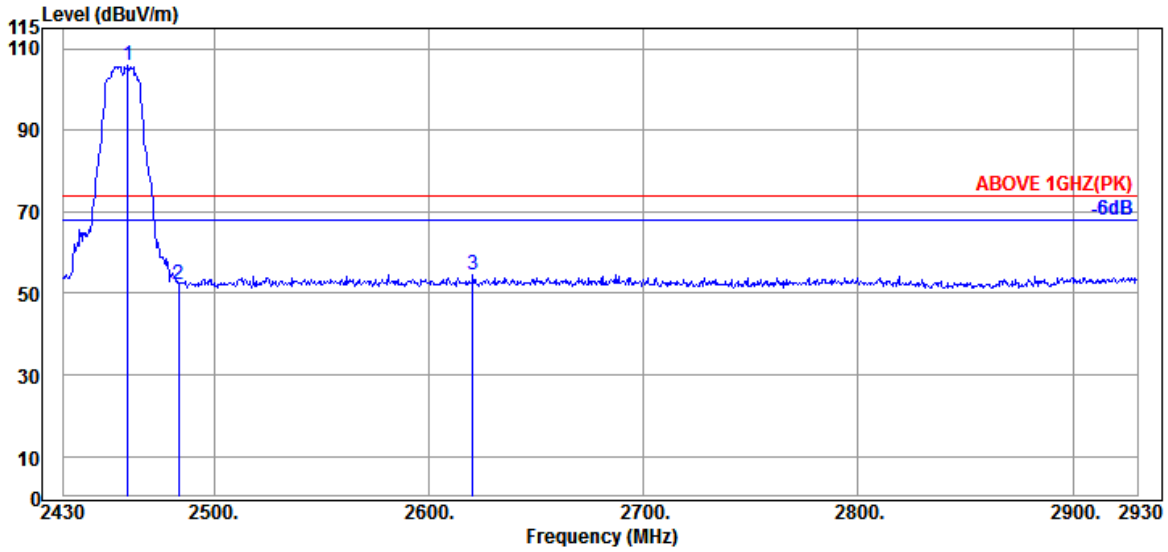

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	104.86	105.72	---	---	Peak
2483.500	28.01	6.18	33.11	51.12	52.20	74.00	21.80	Peak
2620.500	28.60	6.36	33.01	52.64	54.59	74.00	19.41	Peak

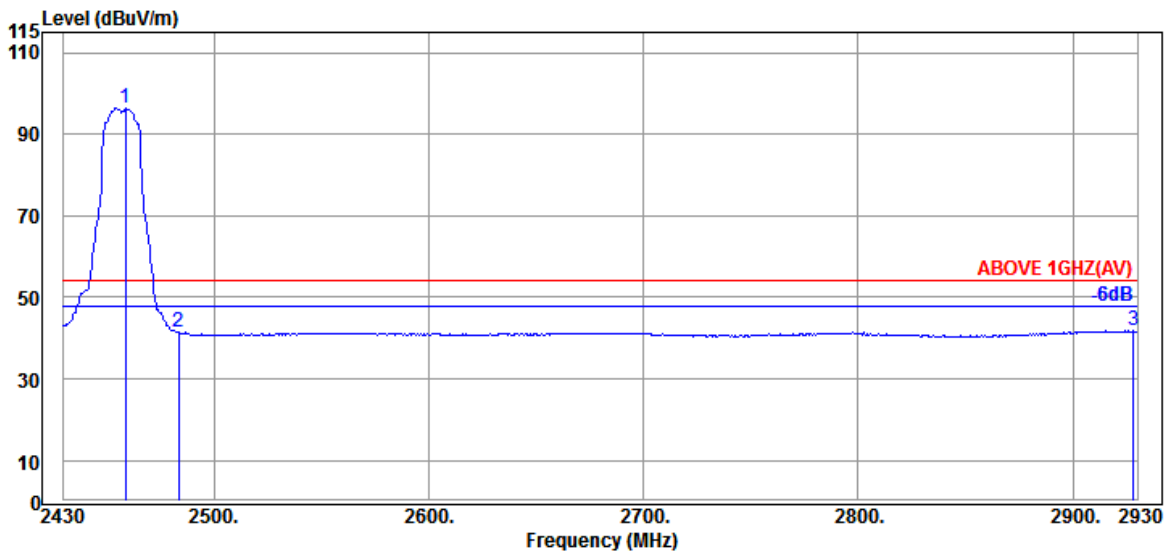


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	27.84	6.15	33.13	95.52	96.38	---	---	Average
2483.500	28.01	6.18	33.11	40.29	41.37	54.00	12.63	Average
2928.000	29.20	6.75	32.79	38.62	41.78	54.00	12.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

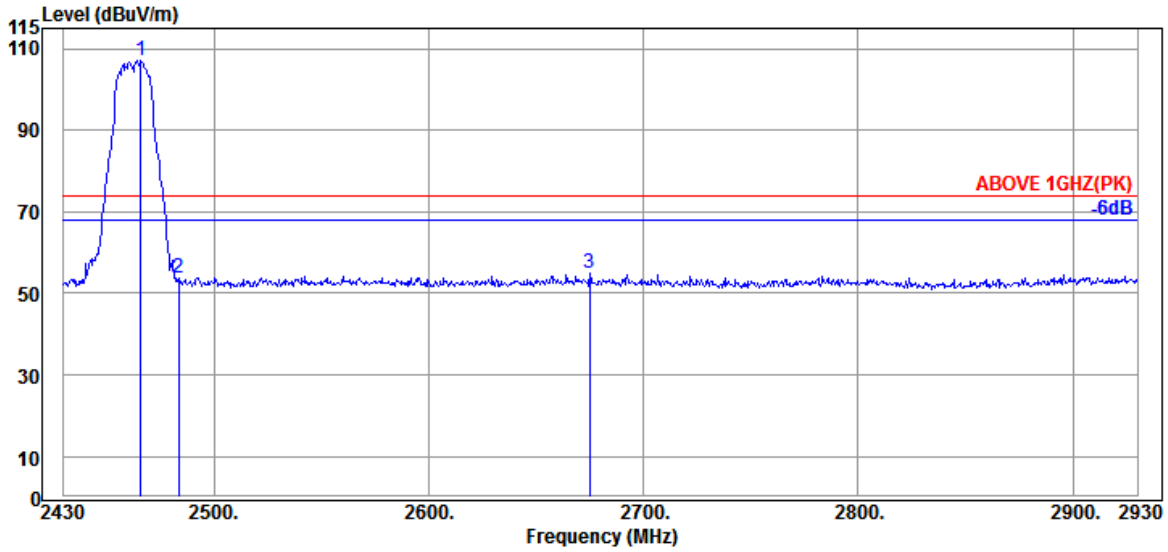

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	106.31	107.22	---	---	Peak
2483.500	28.01	6.18	33.11	52.53	53.61	74.00	20.39	Peak
2675.000	28.84	6.45	32.97	52.53	54.85	74.00	19.15	Peak

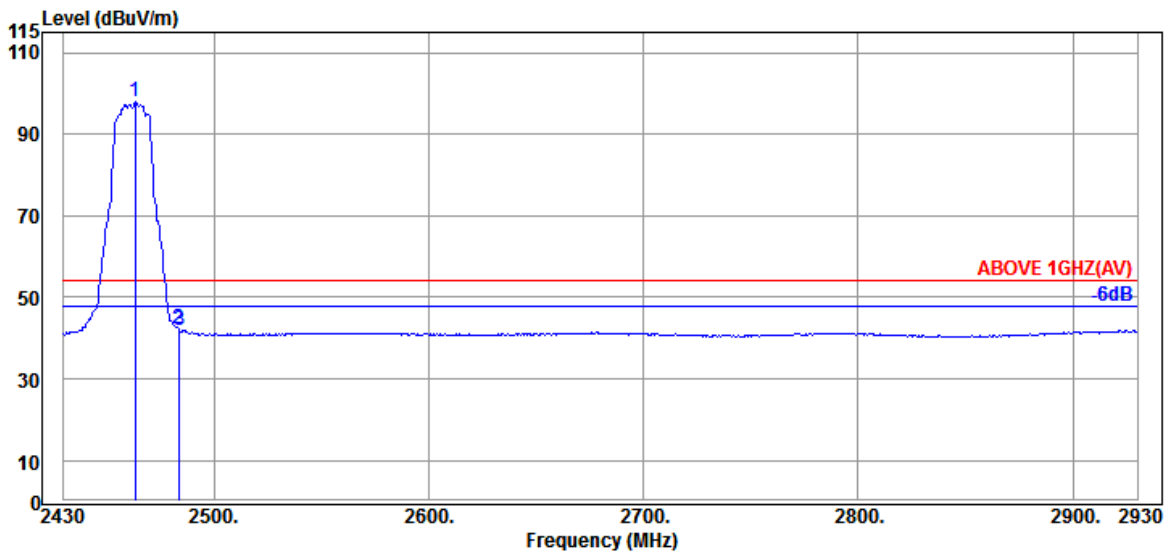


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	27.89	6.15	33.13	96.99	97.90	---	---	Average
2483.500	28.01	6.18	33.11	41.33	42.41	54.00	11.59	Average
2484.000	28.01	6.18	33.11	40.88	41.96	54.00	12.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

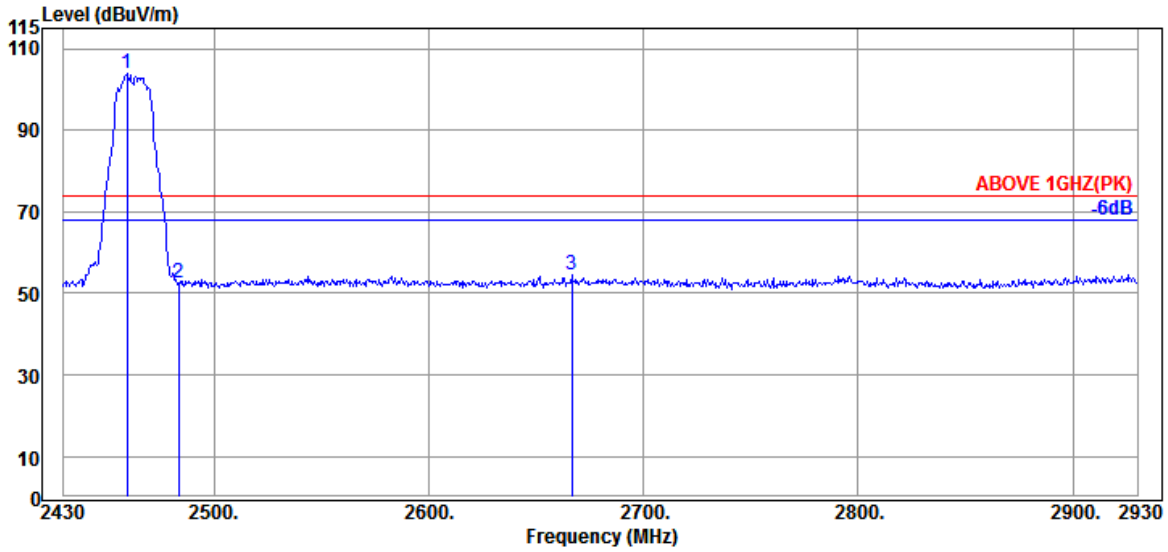

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	102.91	103.77	---	---	Peak
2483.500	28.01	6.18	33.11	51.61	52.69	74.00	21.31	Peak
2666.500	28.83	6.43	32.98	52.28	54.56	74.00	19.44	Peak

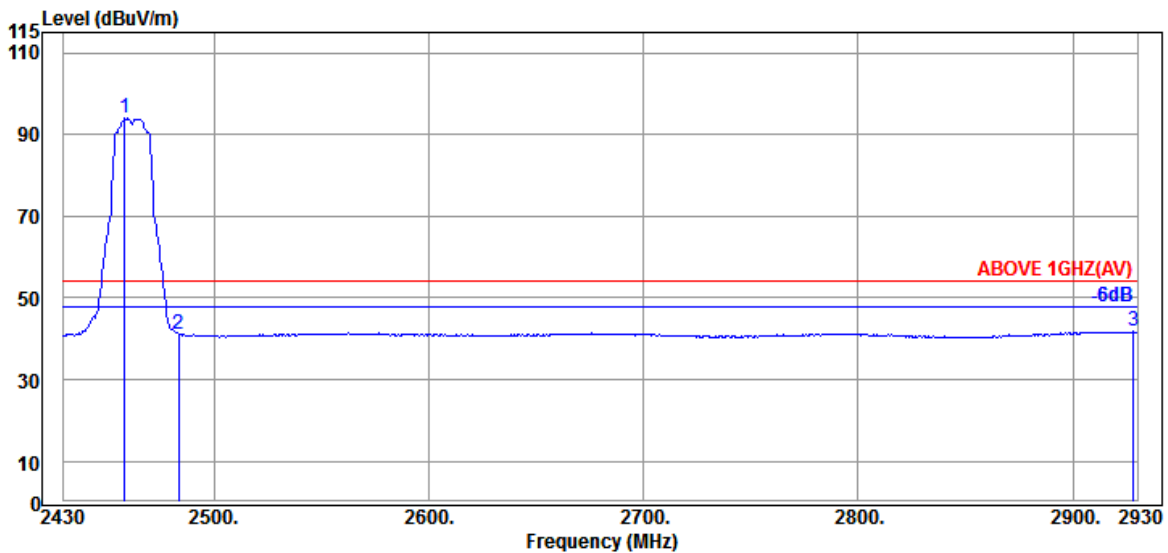


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	27.84	6.15	33.14	93.21	94.06	---	---	Average
2483.500	28.01	6.18	33.11	40.14	41.22	54.00	12.78	Average
2928.000	29.20	6.75	32.79	38.54	41.70	54.00	12.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

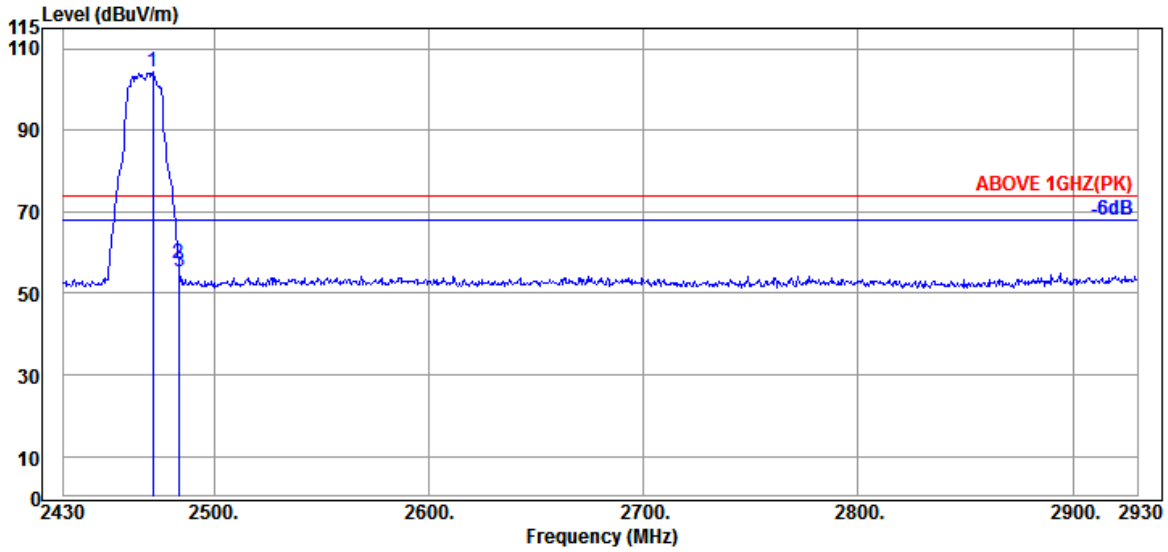

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	103.26	104.24	---	---	Peak
2483.500	28.01	6.18	33.11	56.17	57.25	74.00	16.75	Peak
2484.000	28.01	6.18	33.11	54.11	55.19	74.00	18.81	Peak

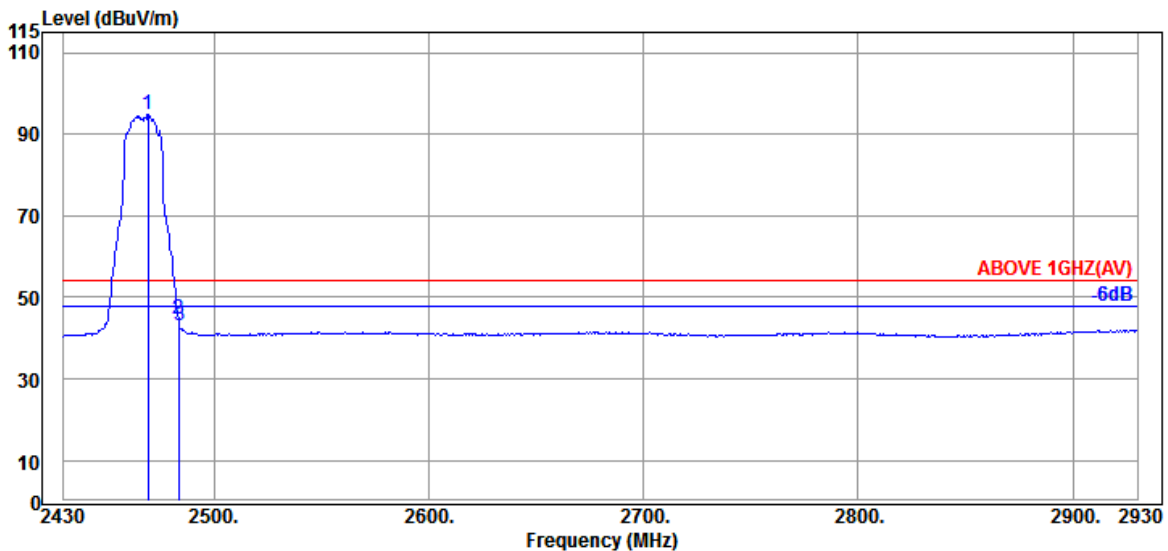


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	27.93	6.15	33.13	93.78	94.73	---	---	Average
2483.500	28.01	6.18	33.11	43.61	44.69	54.00	9.31	Average
2484.000	28.01	6.18	33.11	42.01	43.09	54.00	10.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

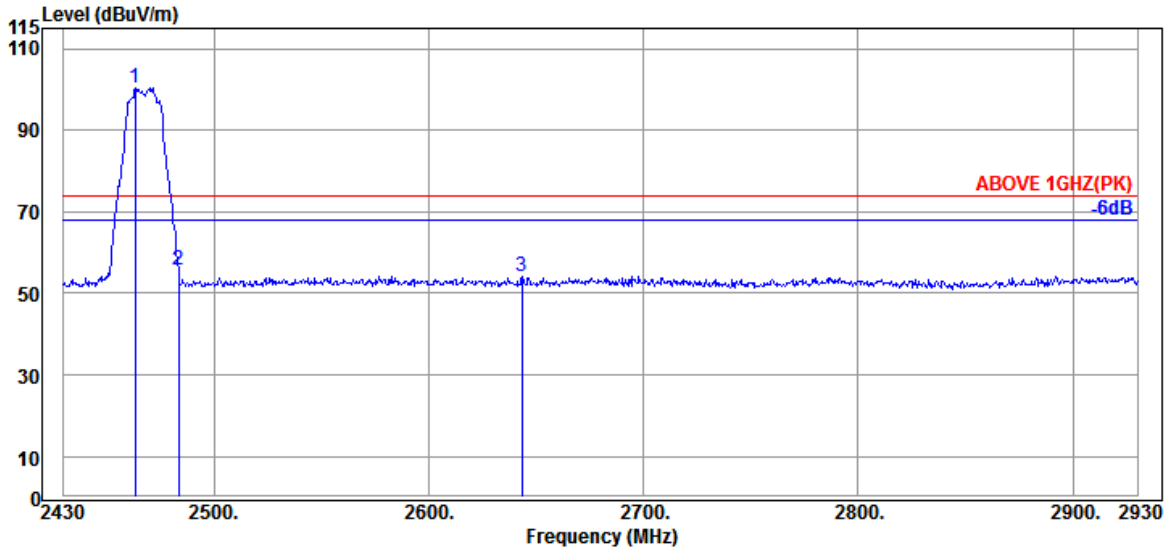

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	27.89	6.15	33.13	99.36	100.27	---	---	Peak
2483.500	28.01	6.18	33.11	54.76	55.84	74.00	18.16	Peak
2643.500	28.75	6.41	32.99	52.17	54.34	74.00	19.66	Peak

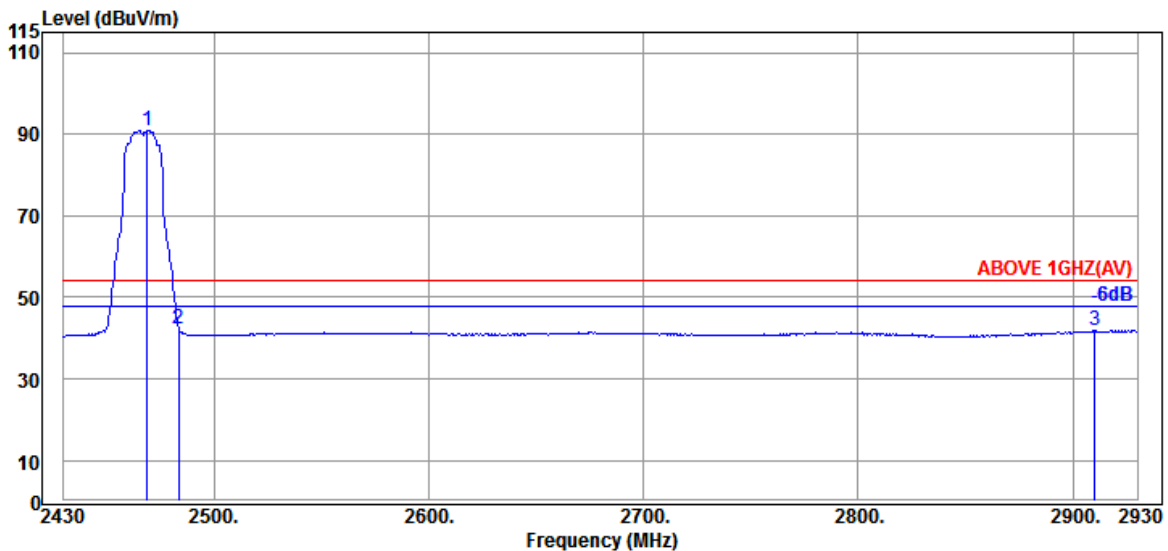


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	27.93	6.15	33.13	90.02	90.97	---	---	Average
2483.500	28.01	6.18	33.11	41.39	42.47	54.00	11.53	Average
2910.000	29.20	6.73	32.81	38.70	41.82	54.00	12.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

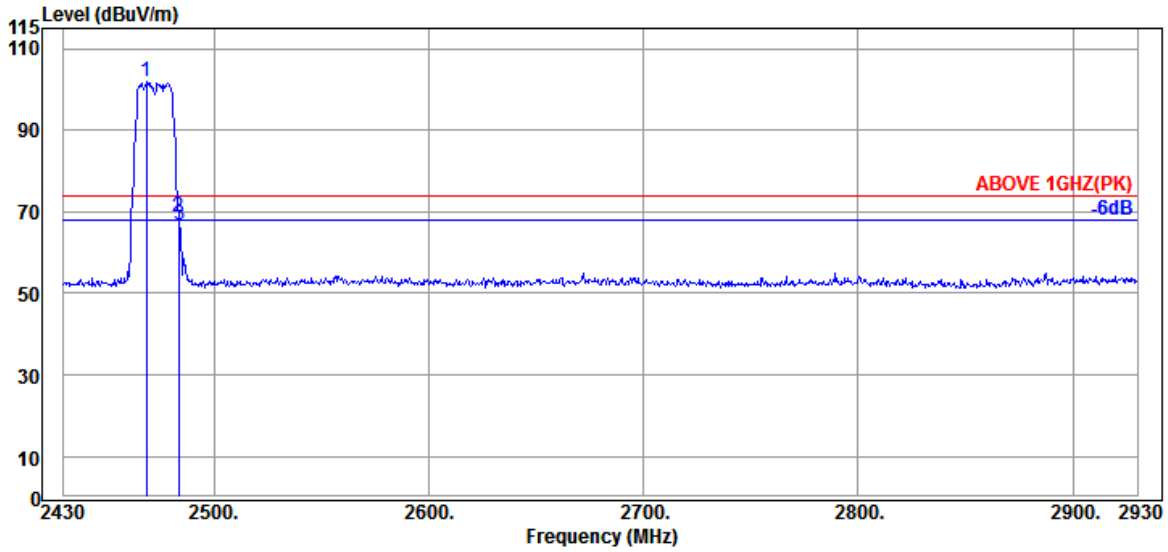

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	100.91	101.86	---	---	Peak
2483.500	28.01	6.18	33.11	67.66	68.74	74.00	5.26	Peak
2484.000	28.01	6.18	33.11	65.65	66.73	74.00	7.27	Peak

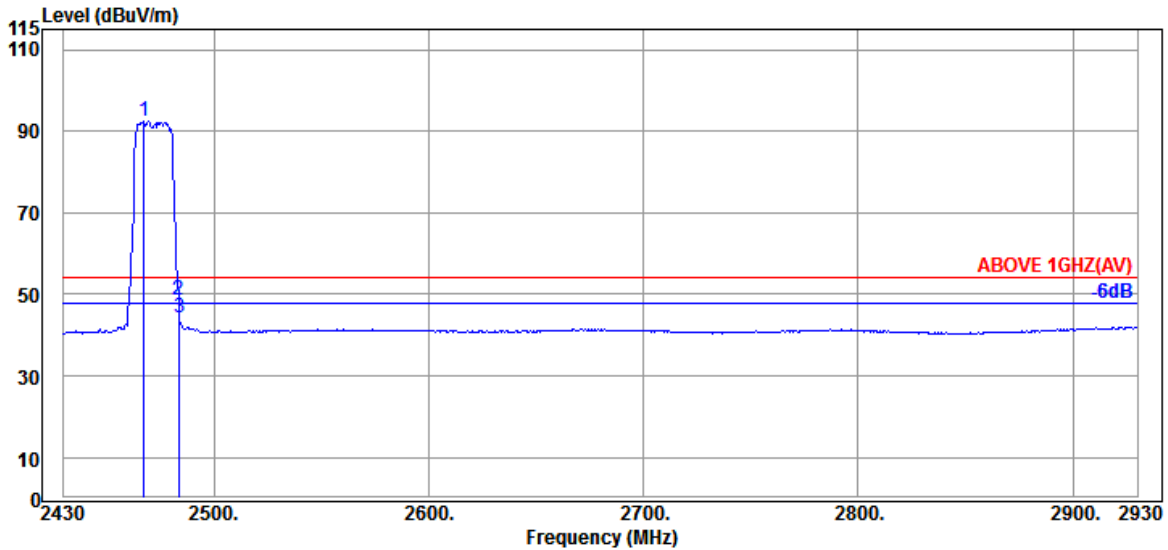


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	91.57	92.48	---	---	Average
2483.500	28.01	6.18	33.11	47.45	48.53	54.00	5.47	Average
2484.000	28.01	6.18	33.11	43.36	44.44	54.00	9.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

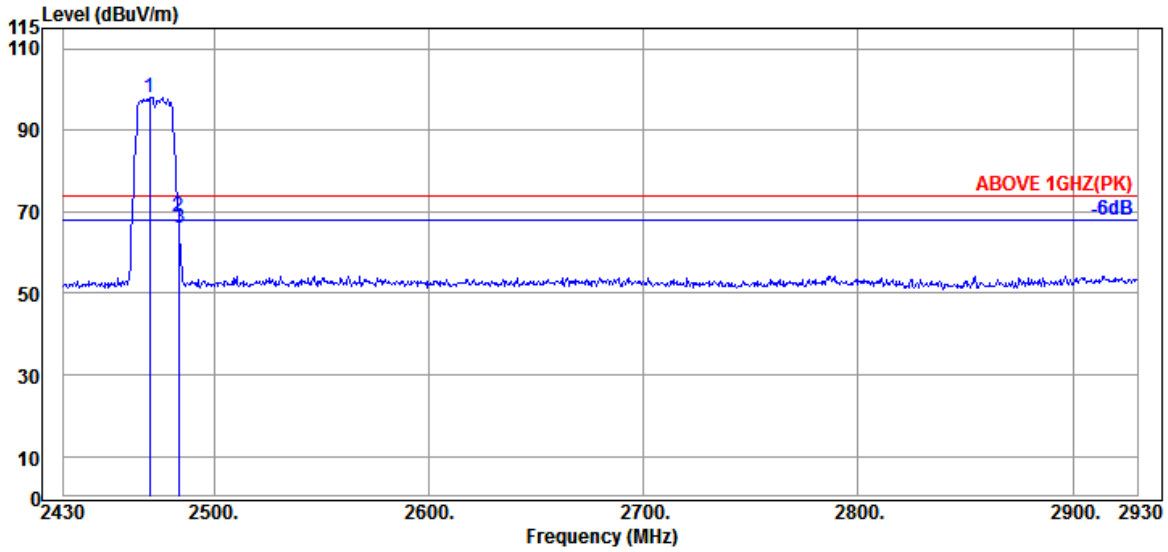

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	27.93	6.15	33.13	97.08	98.03	---	---	Peak
2483.500	28.01	6.18	33.11	67.64	68.72	74.00	5.28	Peak
2484.000	28.01	6.18	33.11	64.80	65.88	74.00	8.12	Peak

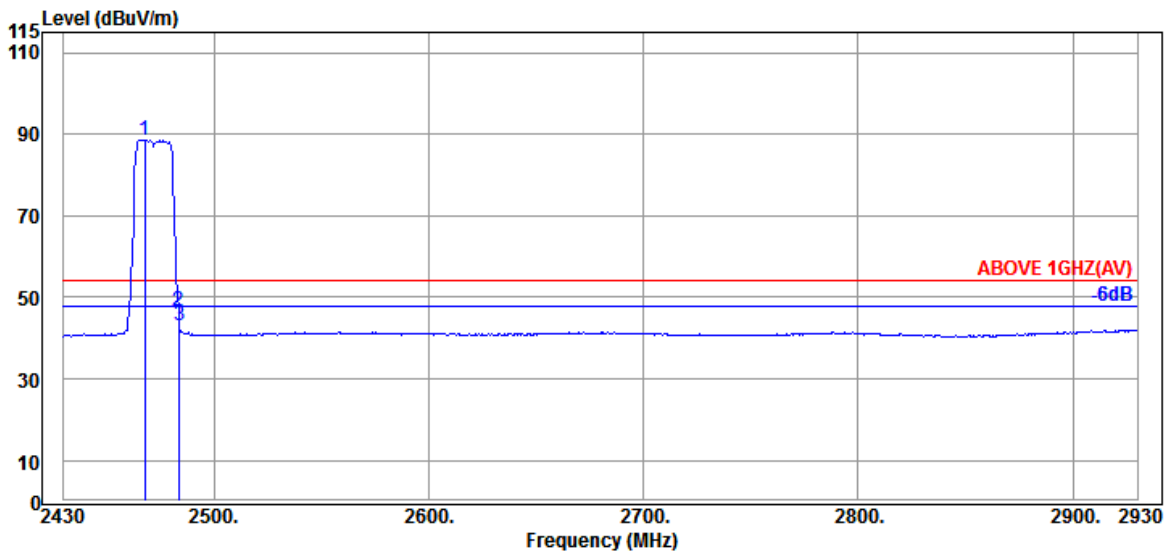


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	27.93	6.15	33.13	87.71	88.66	---	---	Average
2483.500	28.01	6.18	33.11	45.38	46.46	54.00	7.54	Average
2484.000	28.01	6.18	33.11	41.90	42.98	54.00	11.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

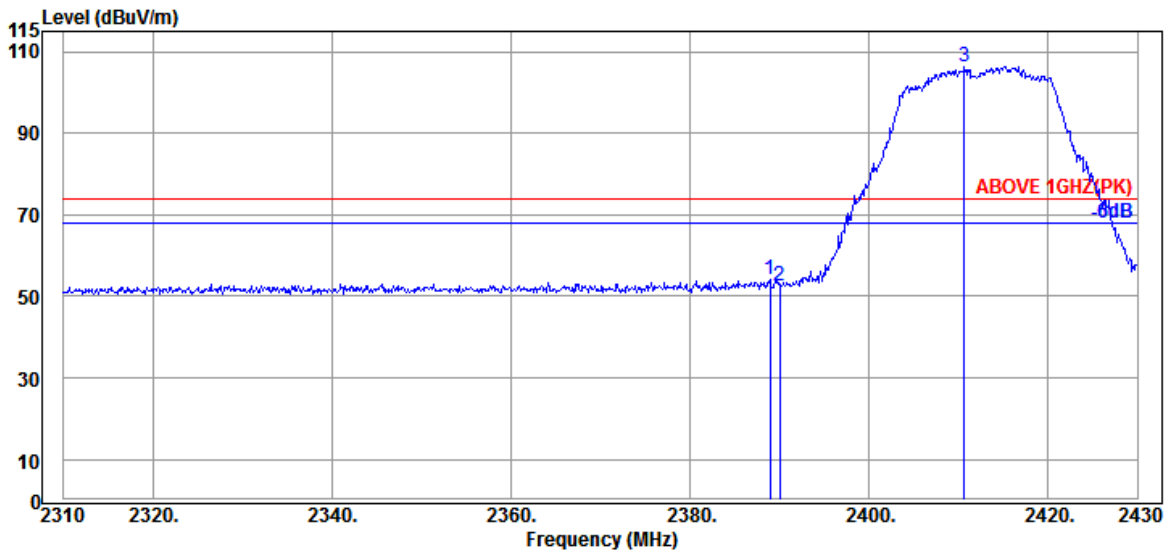

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	27.57	6.04	33.19	53.67	54.09	74.00	19.91	Peak
2390.040	27.57	6.04	33.19	52.06	52.48	74.00	21.52	Peak
@ 2410.680	27.63	6.07	33.18	105.84	106.36	---	---	Peak

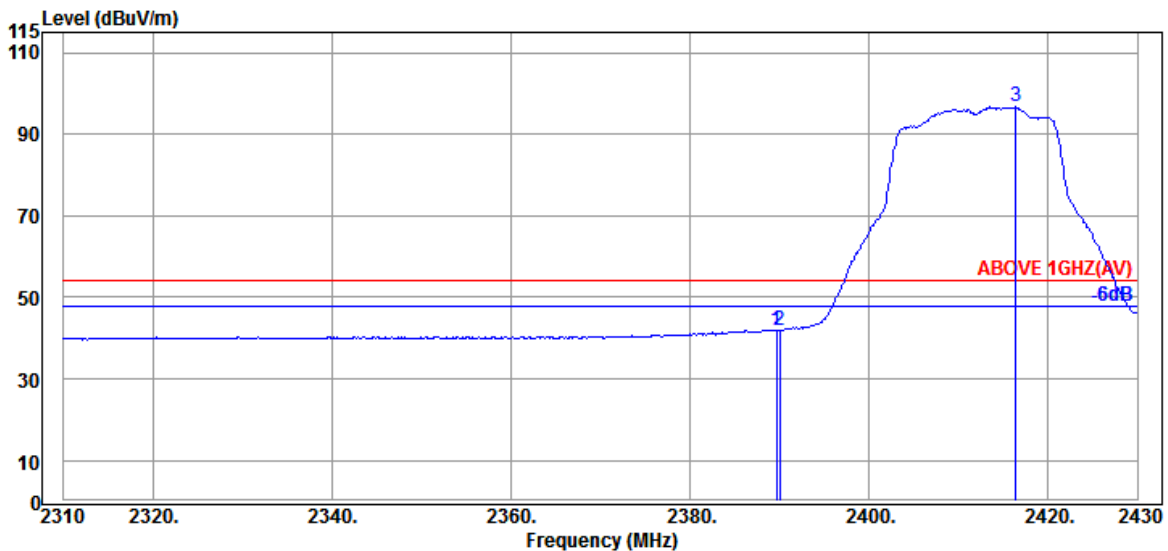


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	41.54	41.96	54.00	12.04	Average
2390.040	27.57	6.04	33.19	41.67	42.09	54.00	11.91	Average
@ 2416.440	27.66	6.07	33.17	96.08	96.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

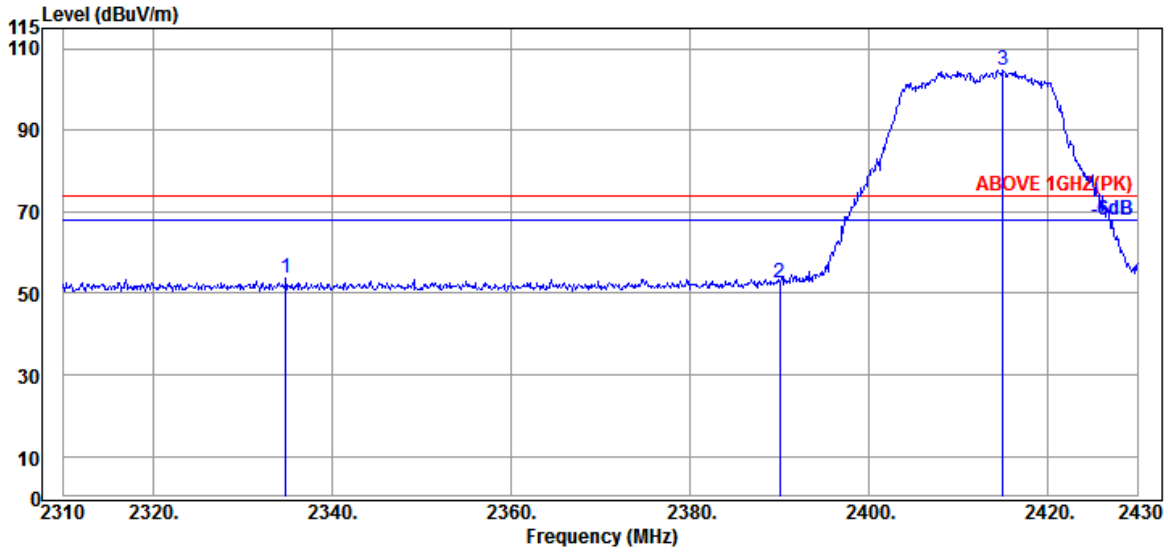

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.840	27.50	5.96	33.24	53.36	53.58	74.00	20.42	Peak
2390.040	27.57	6.04	33.19	52.20	52.62	74.00	21.38	Peak
@ 2415.000	27.66	6.07	33.17	104.02	104.58	---	---	Peak

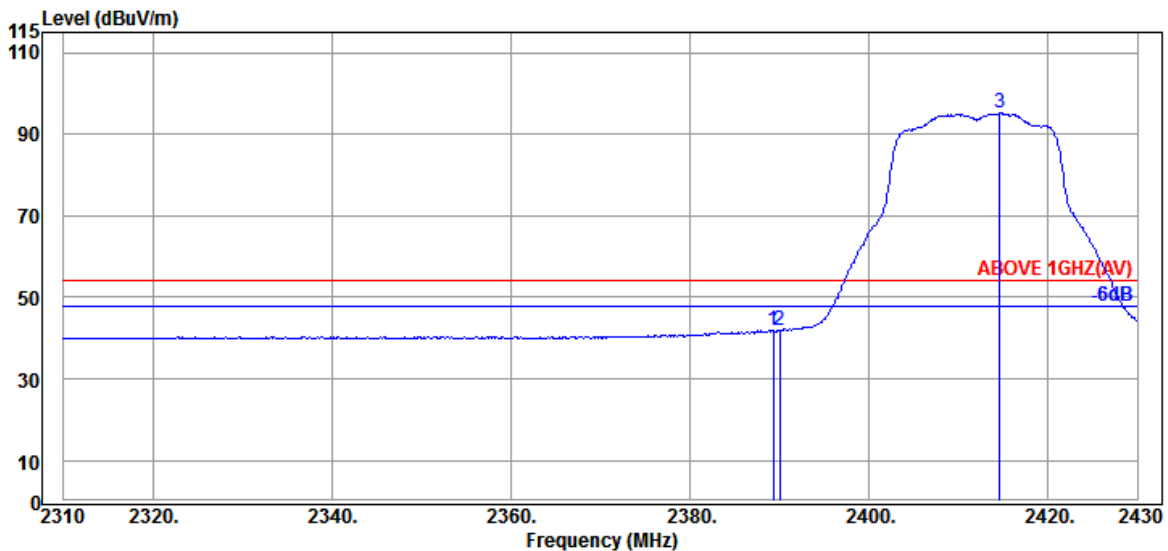


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	27.57	6.04	33.19	41.57	41.99	54.00	12.01	Average
2390.040	27.57	6.04	33.19	41.45	41.87	54.00	12.13	Average
@ 2414.640	27.66	6.07	33.17	94.59	95.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

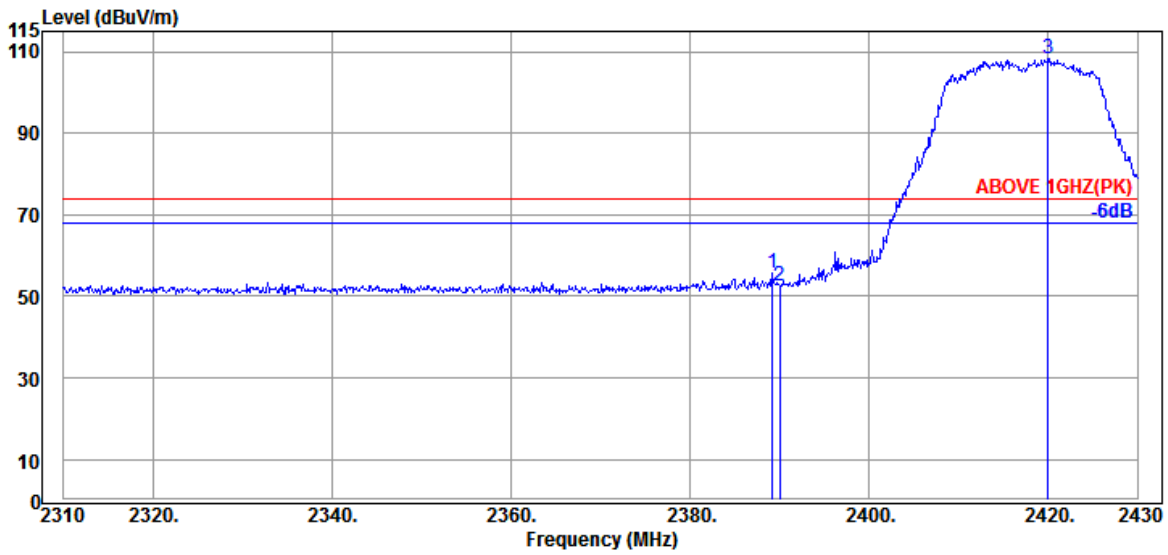

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	55.24	55.66	74.00	18.34	Peak
2390.040	27.57	6.04	33.19	52.07	52.49	74.00	21.51	Peak
@ 2420.040	27.69	6.10	33.17	107.83	108.45	---	---	Peak

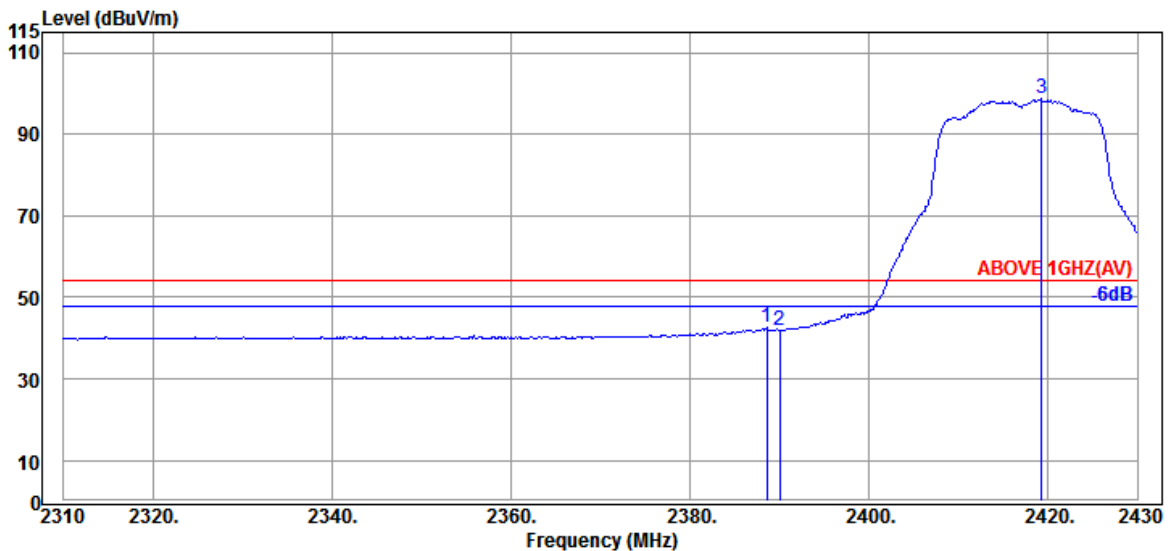


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	27.57	6.04	33.19	42.06	42.48	54.00	11.52	Average
2390.040	27.57	6.04	33.19	41.62	42.04	54.00	11.96	Average
@ 2419.320	27.69	6.07	33.17	98.08	98.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

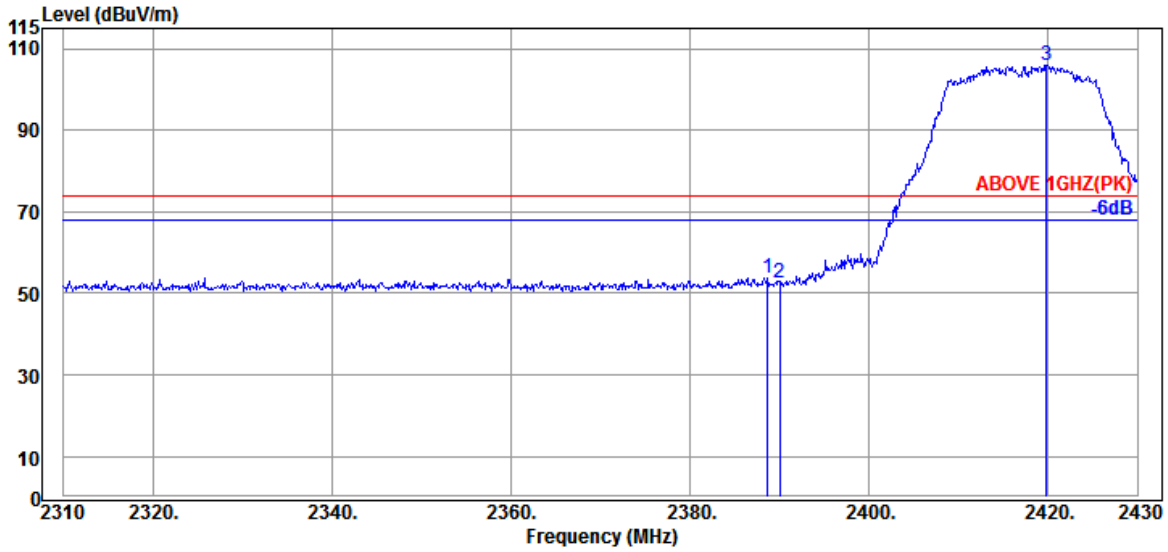

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	27.57	6.04	33.19	53.41	53.83	74.00	20.17	Peak
2390.040	27.57	6.04	33.19	52.29	52.71	74.00	21.29	Peak
@ 2419.800	27.69	6.10	33.17	105.41	106.03	---	---	Peak

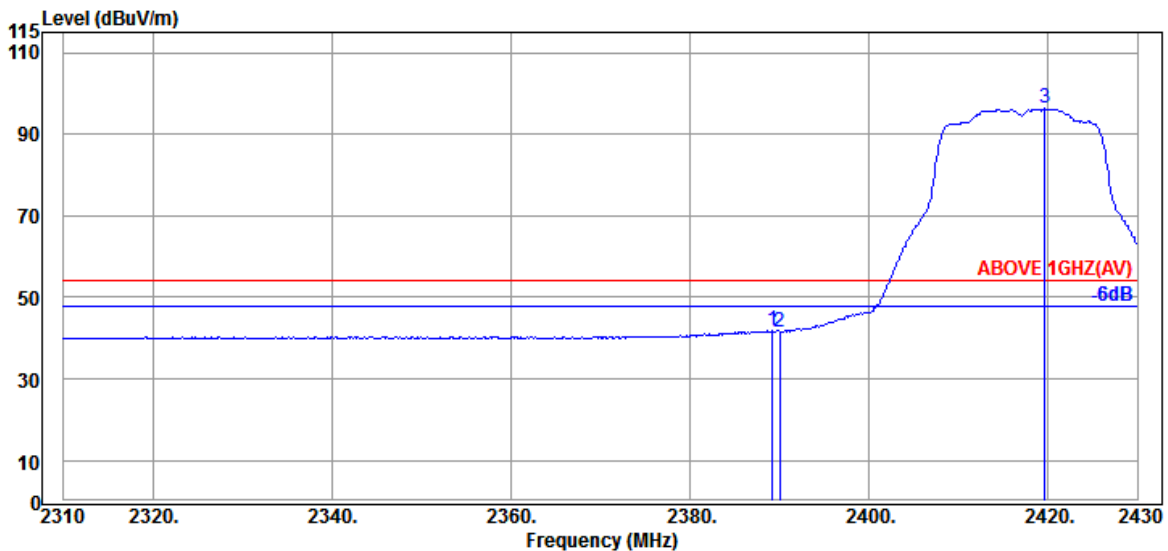


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	41.40	41.82	54.00	12.18	Average
2390.040	27.57	6.04	33.19	41.20	41.62	54.00	12.38	Average
@ 2419.680	27.69	6.10	33.17	95.70	96.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

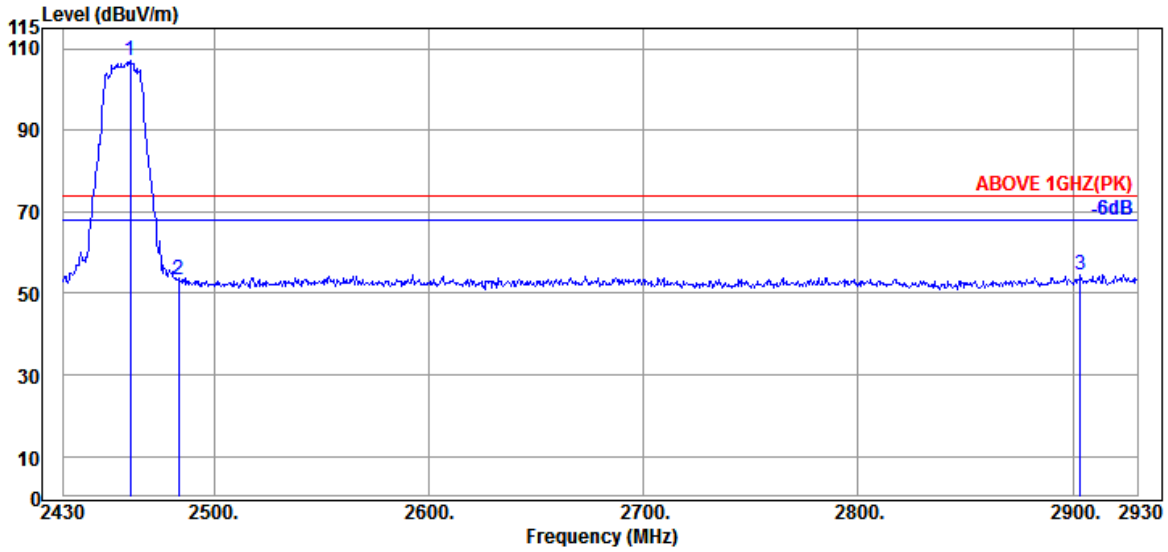

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	106.31	107.22	---	---	Peak
2483.500	28.01	6.18	33.11	52.46	53.54	74.00	20.46	Peak
2903.500	29.20	6.73	32.81	51.59	54.71	74.00	19.29	Peak

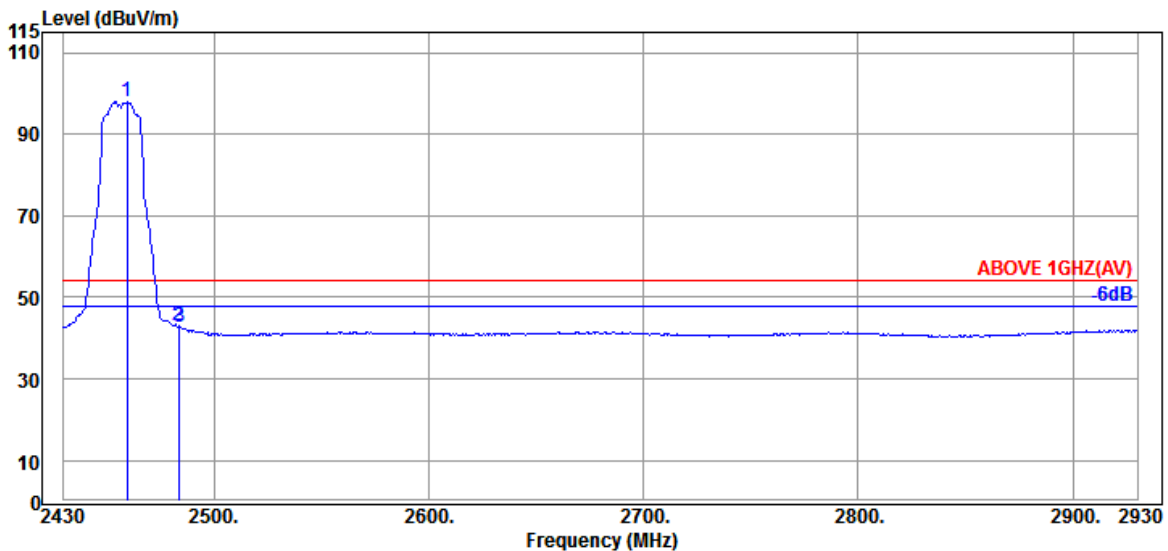


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	96.99	97.85	---	---	Average
2483.500	28.01	6.18	33.11	41.82	42.90	54.00	11.10	Average
2484.000	28.01	6.18	33.11	41.68	42.76	54.00	11.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

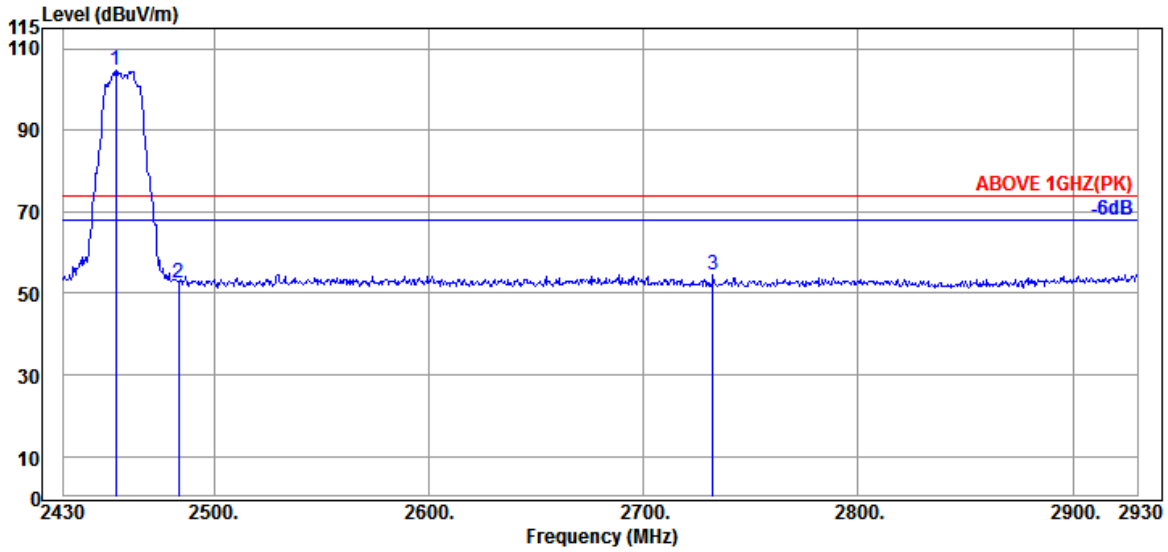

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	27.84	6.15	33.14	103.94	104.79	---	---	Peak
2483.500	28.01	6.18	33.11	51.51	52.59	74.00	21.41	Peak
2732.500	28.90	6.51	32.93	52.03	54.51	74.00	19.49	Peak

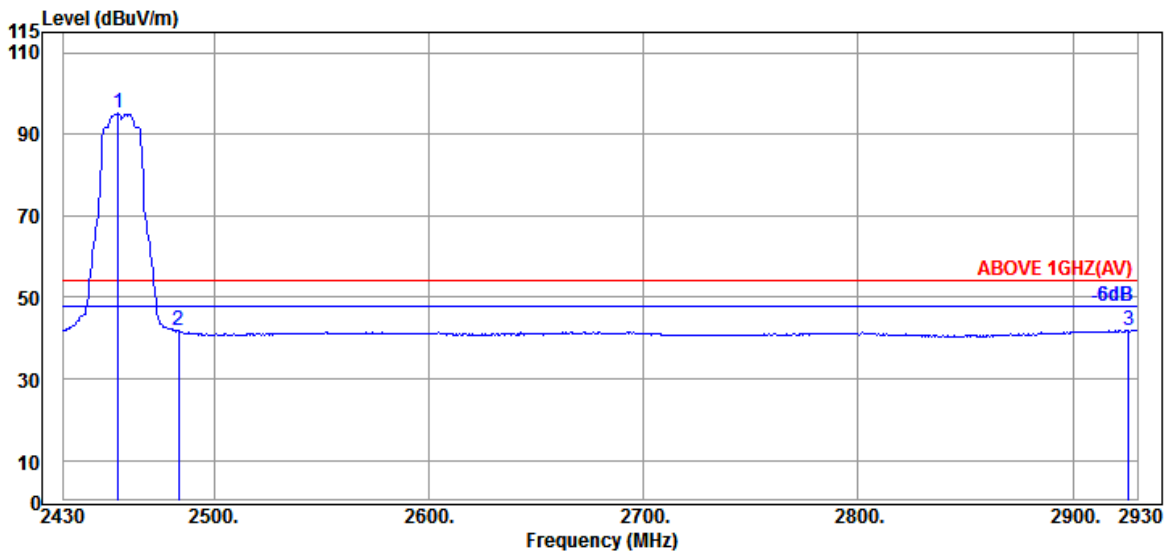


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	27.84	6.15	33.14	94.20	95.05	---	---	Average
2483.500	28.01	6.18	33.11	40.64	41.72	54.00	12.28	Average
2926.000	29.20	6.75	32.79	38.70	41.86	54.00	12.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

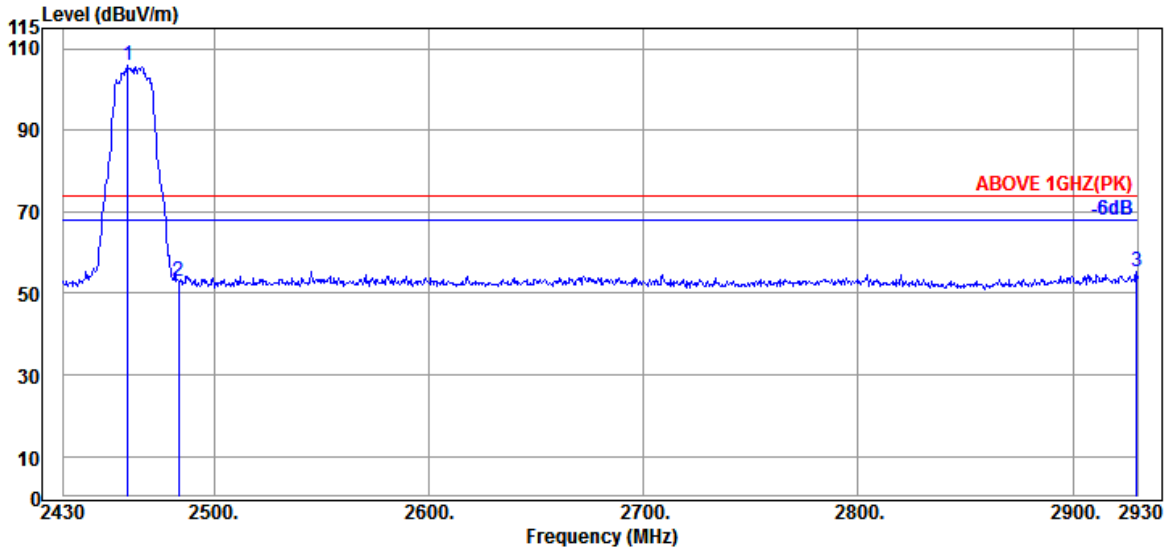

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	105.17	106.03	---	---	Peak
2483.500	28.01	6.18	33.11	51.82	52.90	74.00	21.10	Peak
2929.500	29.20	6.77	32.79	52.11	55.29	74.00	18.71	Peak

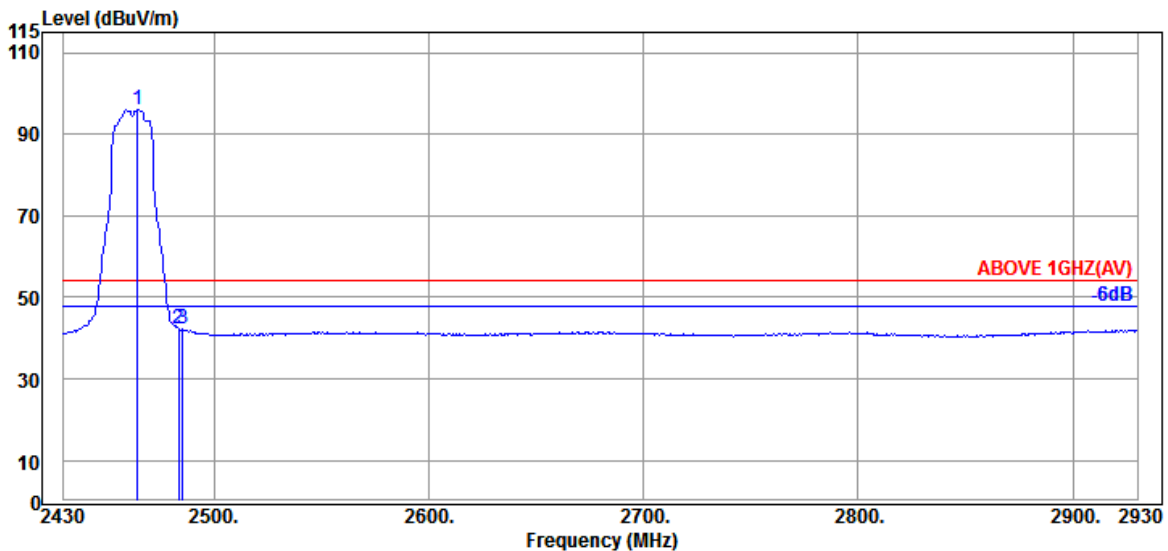


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	27.89	6.15	33.13	95.16	96.07	---	---	Average
2483.500	28.01	6.18	33.11	41.24	42.32	54.00	11.68	Average
2485.500	28.01	6.18	33.11	41.11	42.19	54.00	11.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

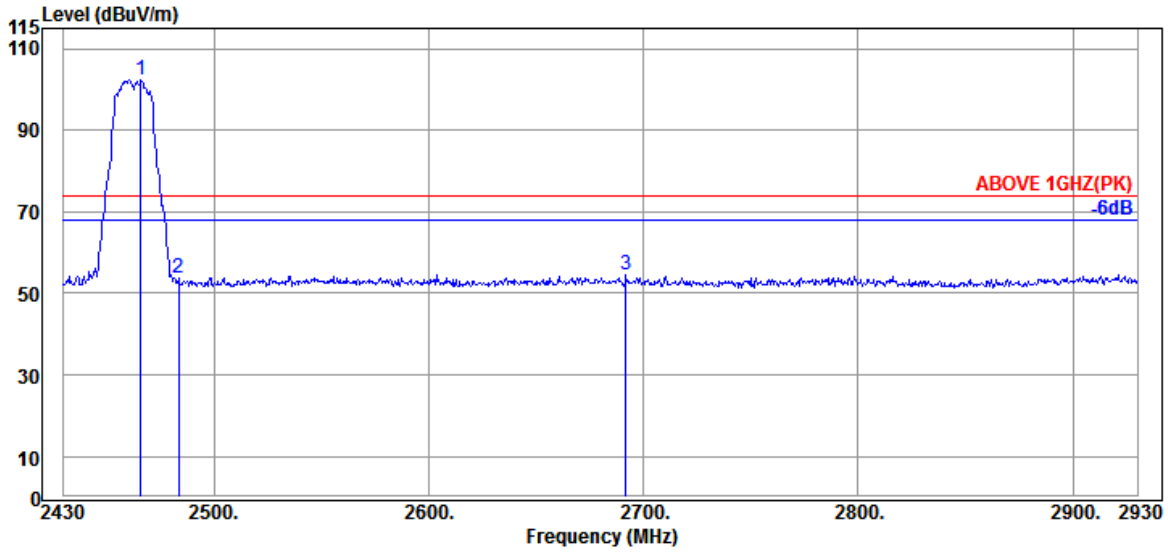

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	101.47	102.38	---	---	Peak
2483.500	28.01	6.18	33.11	52.62	53.70	74.00	20.30	Peak
2692.000	28.89	6.47	32.96	52.30	54.70	74.00	19.30	Peak

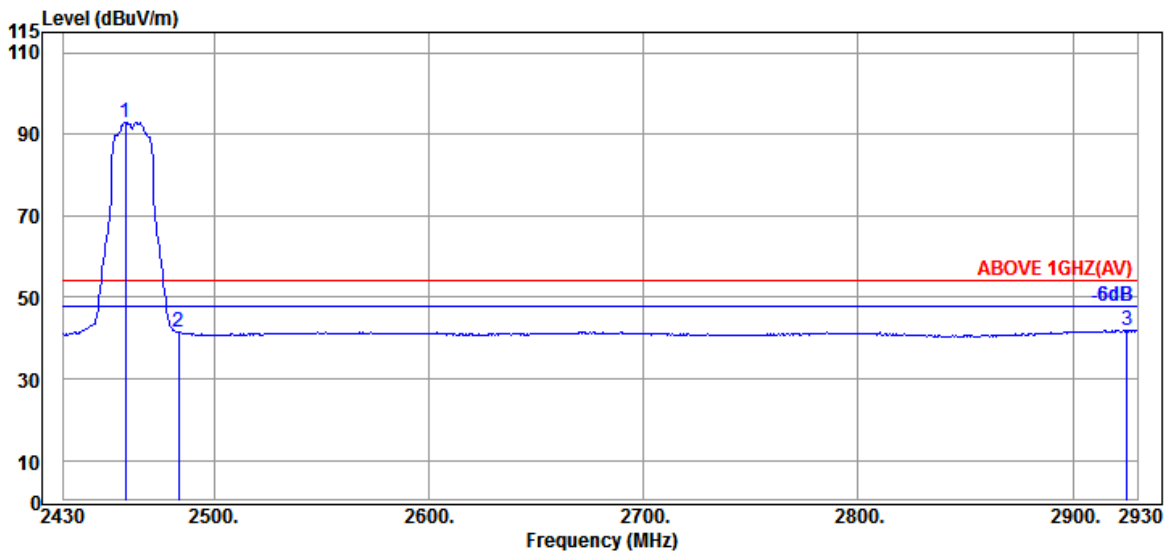


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	27.84	6.15	33.13	92.03	92.89	---	---	Average
2483.500	28.01	6.18	33.11	40.34	41.42	54.00	12.58	Average
2925.000	29.20	6.75	32.79	38.81	41.97	54.00	12.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

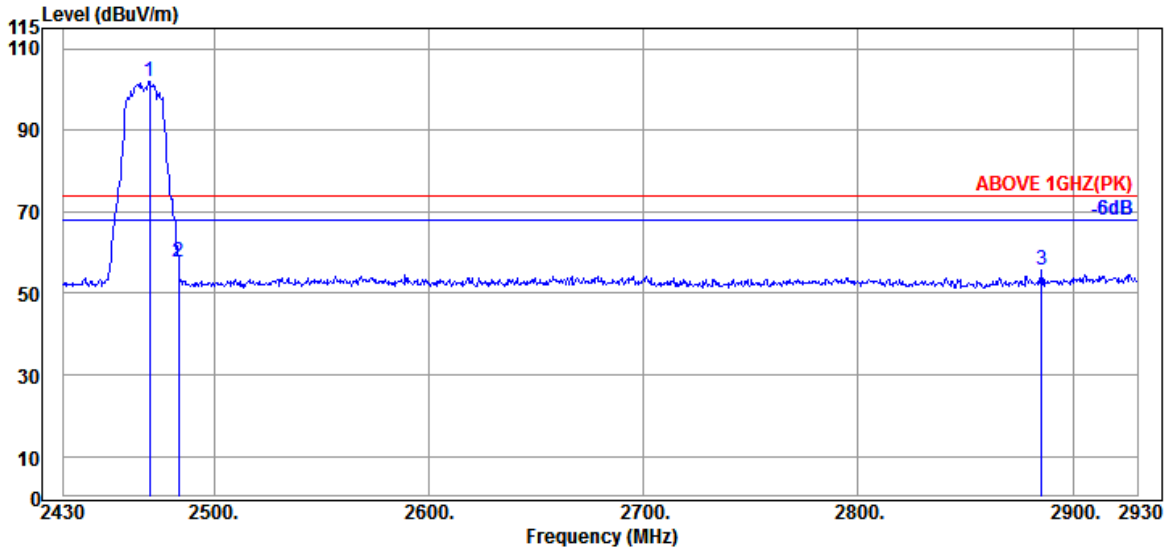

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	27.93	6.15	33.13	101.02	101.97	---	---	Peak
2483.500	28.01	6.18	33.11	56.64	57.72	74.00	16.28	Peak
2885.500	29.15	6.71	32.83	52.51	55.54	74.00	18.46	Peak

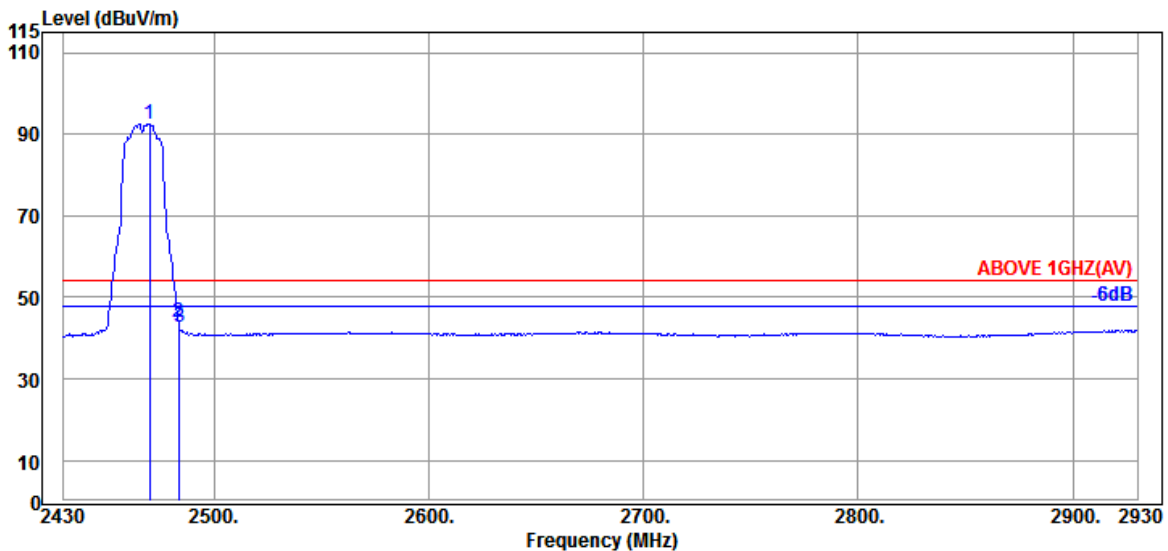


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	27.93	6.15	33.13	91.51	92.46	---	---	Average
2483.500	28.01	6.18	33.11	42.82	43.90	54.00	10.10	Average
2484.000	28.01	6.18	33.11	41.41	42.49	54.00	11.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

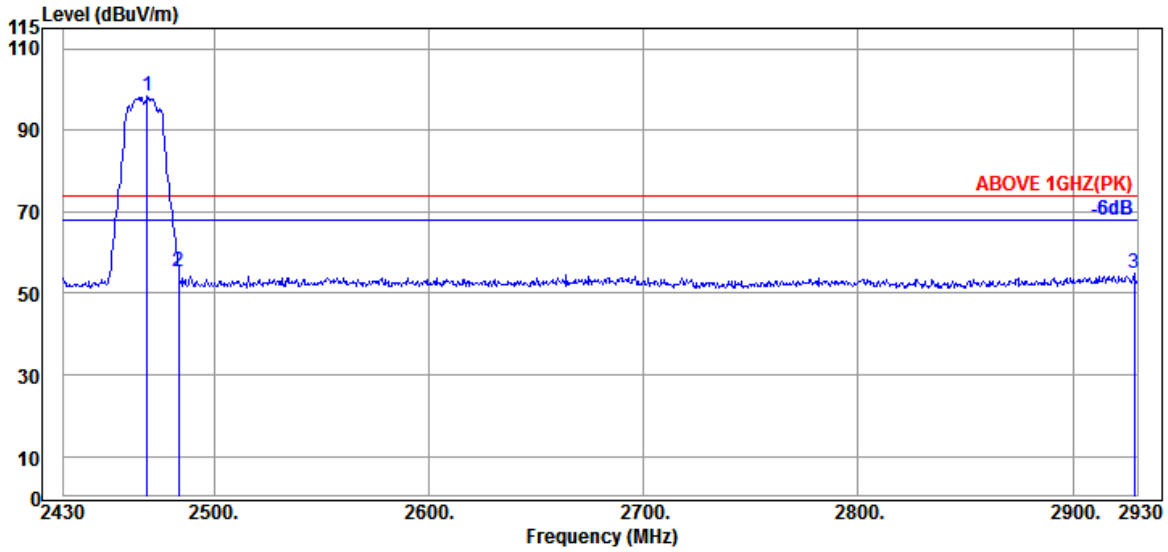

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	27.93	6.15	33.13	97.44	98.39	---	---	Peak
2483.500	28.01	6.18	33.11	54.17	55.25	74.00	18.75	Peak
2928.500	29.20	6.75	32.79	51.69	54.85	74.00	19.15	Peak

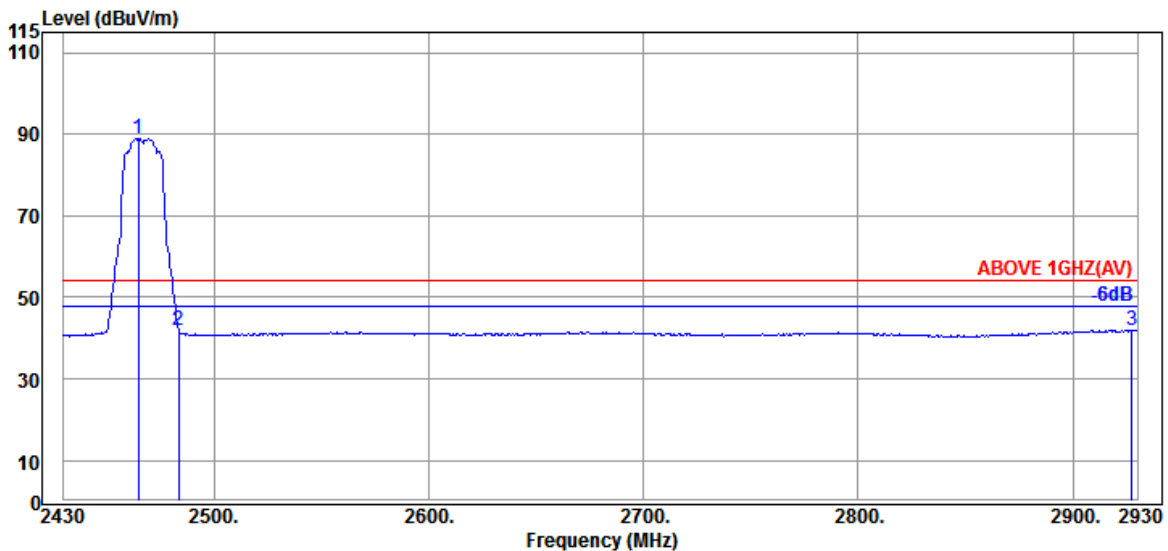


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	88.02	88.93	---	---	Average
2483.500	28.01	6.18	33.11	40.99	42.07	54.00	11.93	Average
2927.500	29.20	6.75	32.79	38.67	41.83	54.00	12.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

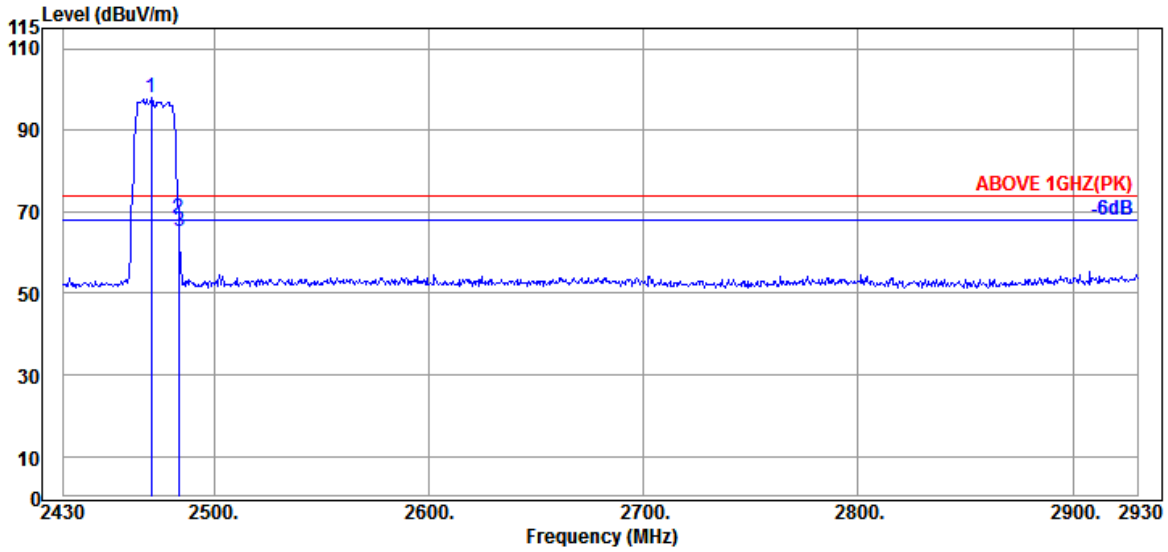

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	27.93	6.18	33.13	97.02	98.00	---	---	Peak
2483.500	28.01	6.18	33.11	67.22	68.30	74.00	5.70	Peak
2484.000	28.01	6.18	33.11	64.05	65.13	74.00	8.87	Peak

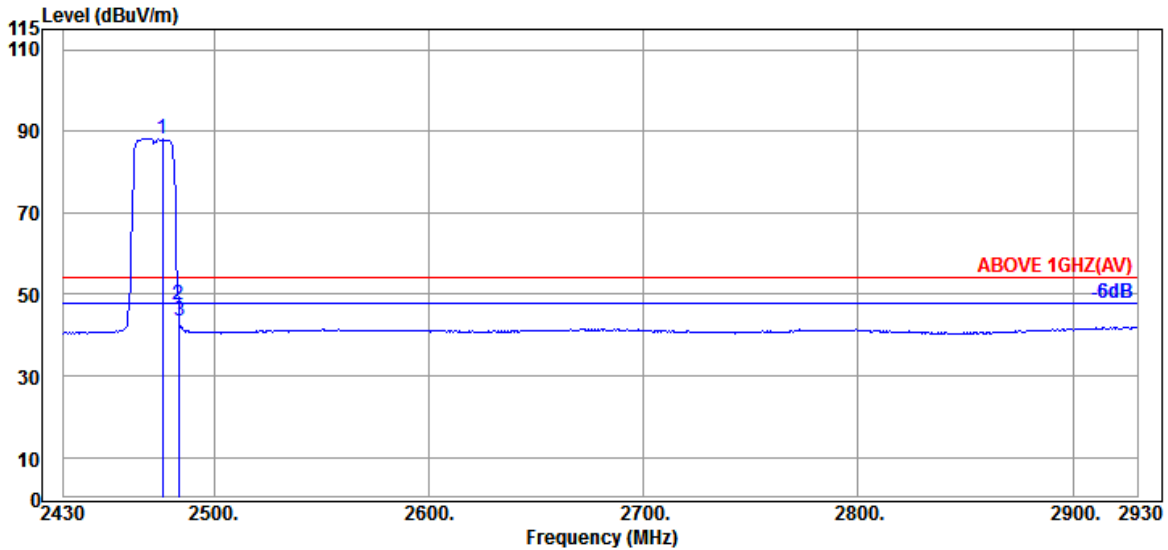


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	27.97	6.18	33.12	87.16	88.19	---	---	Average
2483.500	28.01	6.18	33.11	46.23	47.31	54.00	6.69	Average
2484.000	28.01	6.18	33.11	42.33	43.41	54.00	10.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

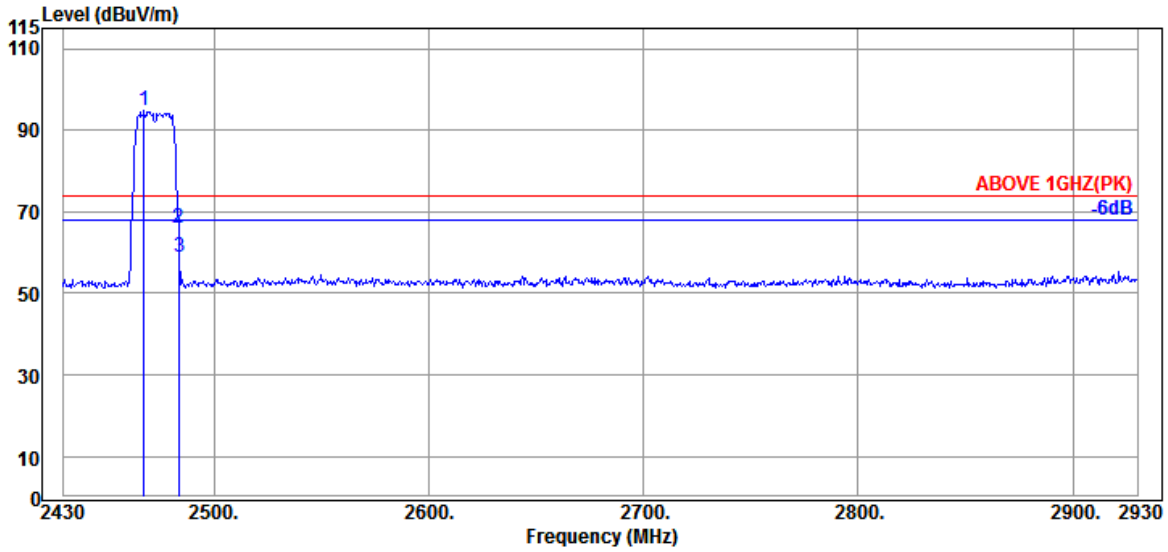

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	93.79	94.70	---	---	Peak
2483.500	28.01	6.18	33.11	64.72	65.80	74.00	8.20	Peak
2484.000	28.01	6.18	33.11	57.92	59.00	74.00	15.00	Peak

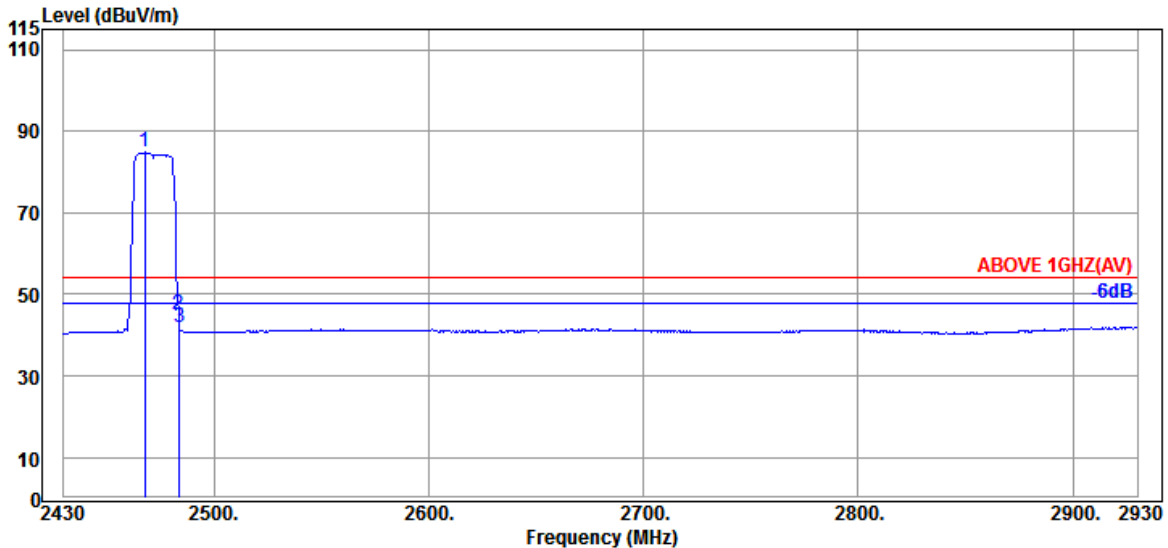


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	27.93	6.15	33.13	83.84	84.79	---	---	Average
2483.500	28.01	6.18	33.11	44.03	45.11	54.00	8.89	Average
2484.000	28.01	6.18	33.11	41.00	42.08	54.00	11.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

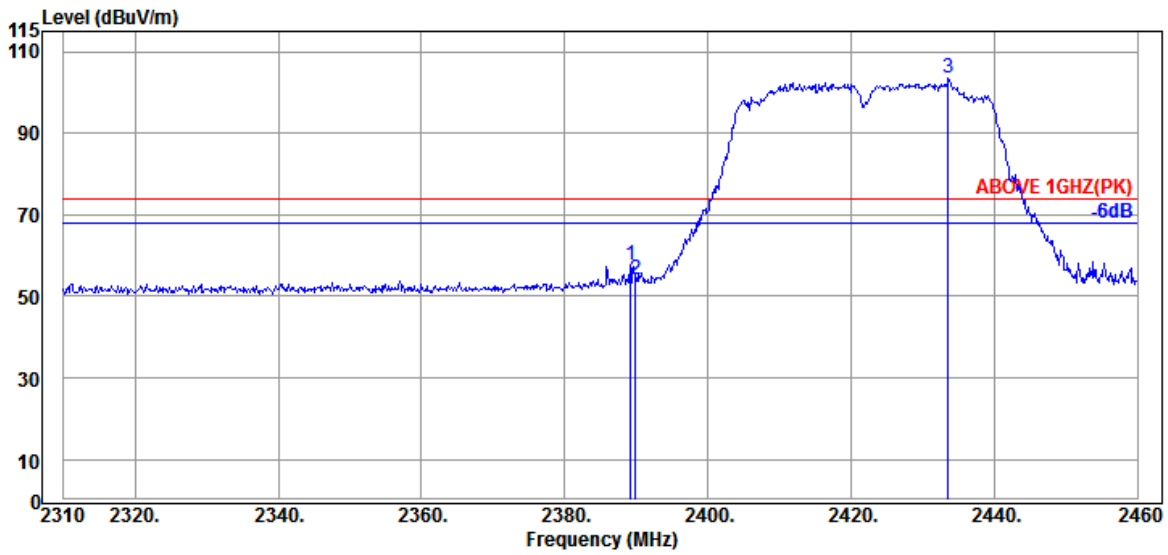

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	57.27	57.69	74.00	16.31	Peak
2389.950	27.57	6.04	33.19	53.90	54.32	74.00	19.68	Peak
@ 2433.600	27.74	6.10	33.16	102.75	103.43	---	---	Peak

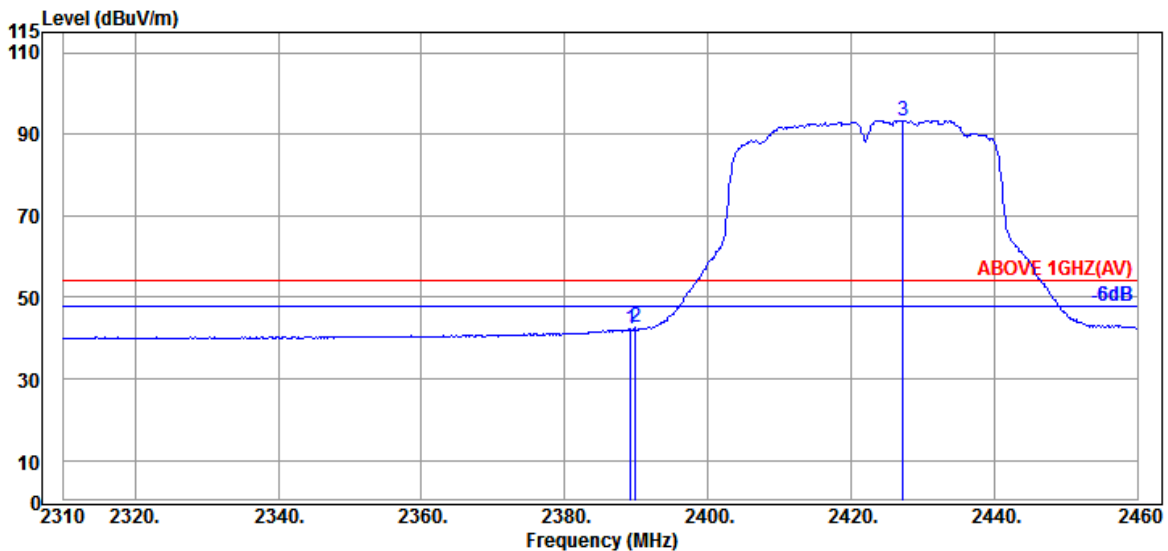


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	41.88	42.30	54.00	11.70	Average
2389.950	27.57	6.04	33.19	42.18	42.60	54.00	11.40	Average
@ 2427.300	27.71	6.10	33.16	92.75	93.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

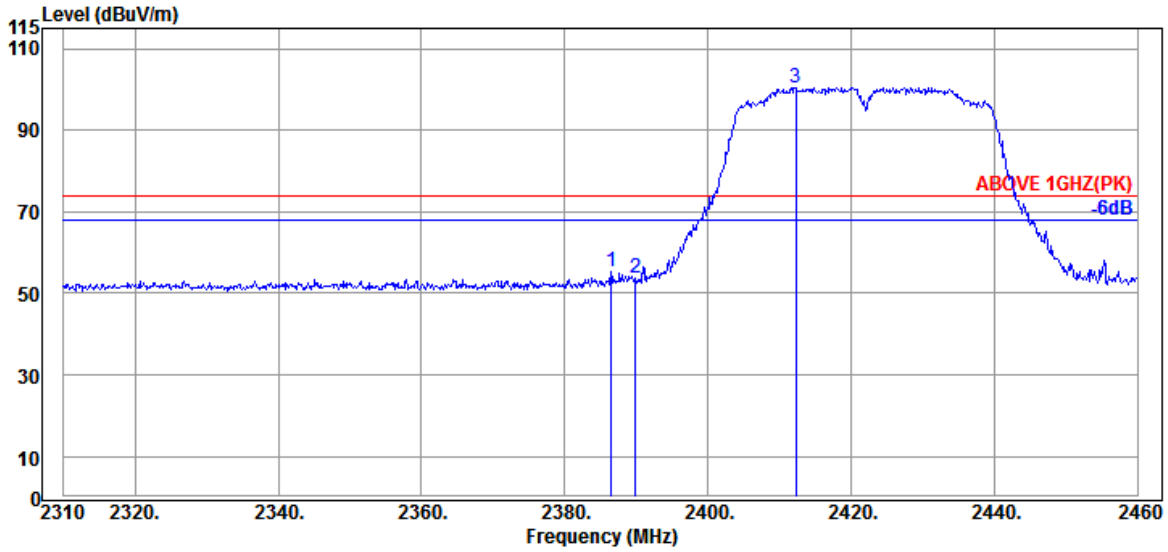

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	27.57	6.04	33.20	54.80	55.21	74.00	18.79	Peak
2389.950	27.57	6.04	33.19	53.47	53.89	74.00	20.11	Peak
@ 2412.300	27.66	6.07	33.17	99.99	100.55	---	---	Peak

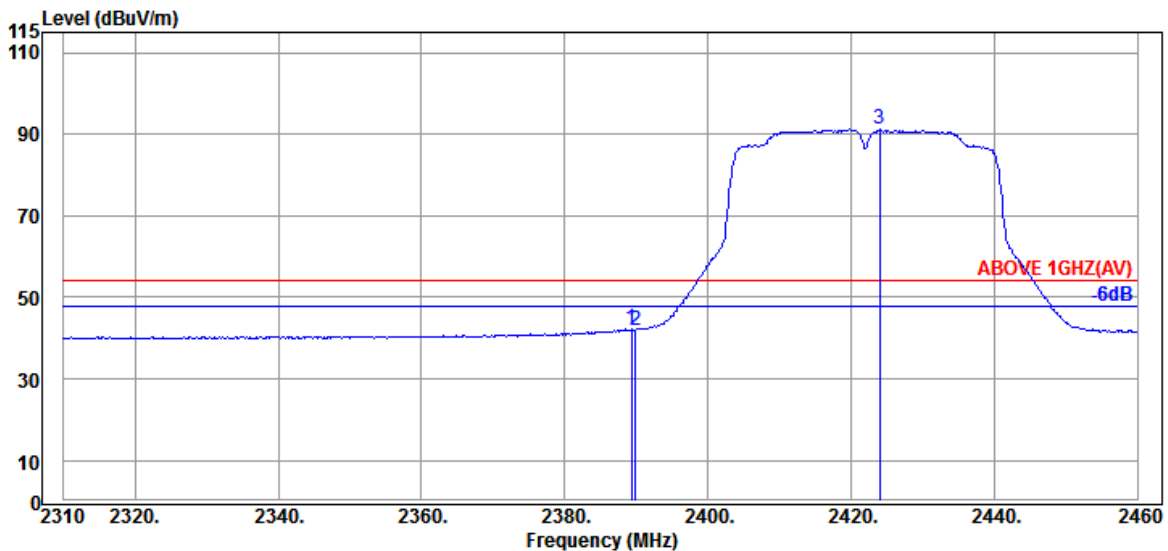


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	27.57	6.04	33.19	41.71	42.13	54.00	11.87	Average
2389.950	27.57	6.04	33.19	41.56	41.98	54.00	12.02	Average
@ 2424.000	27.69	6.10	33.17	90.62	91.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

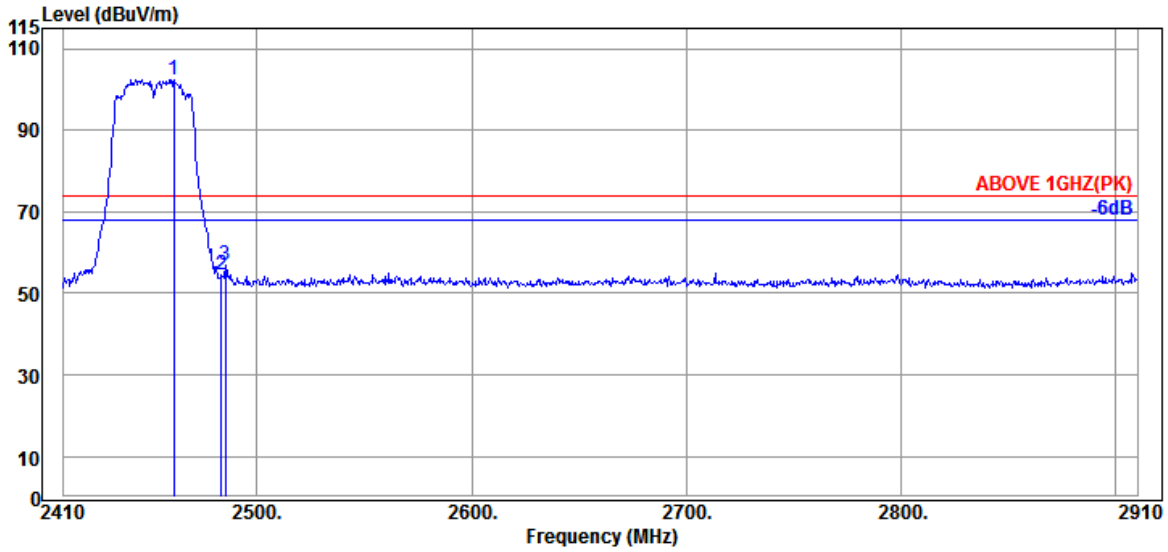

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	27.89	6.15	33.13	101.60	102.51	---	---	Peak
2483.500	28.01	6.18	33.11	53.29	54.37	74.00	19.63	Peak
2485.500	28.01	6.18	33.11	56.02	57.10	74.00	16.90	Peak

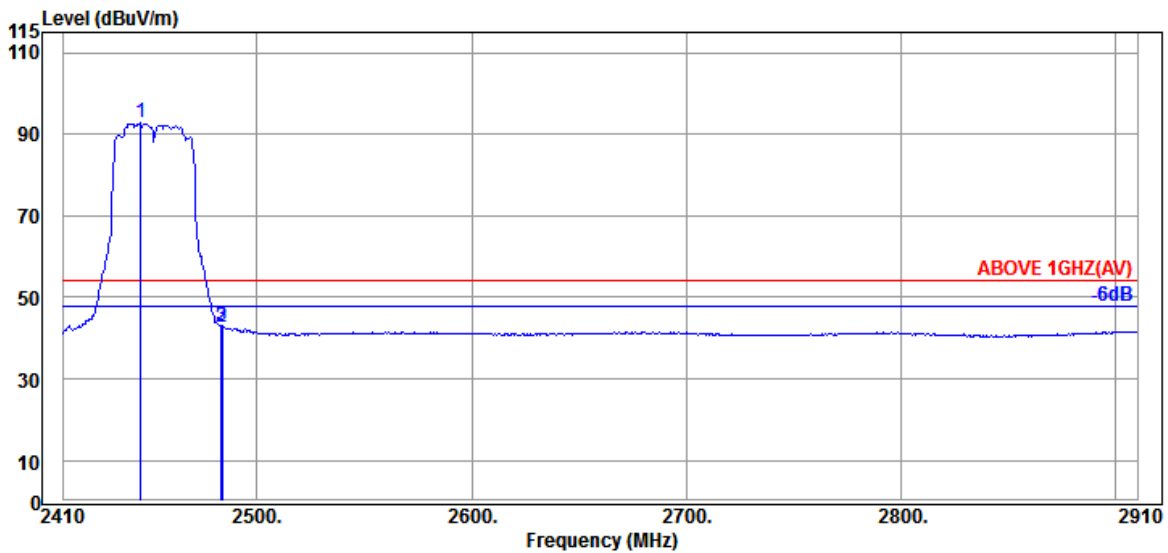


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	27.77	6.13	33.15	91.92	92.67	---	---	Average
2483.500	28.01	6.18	33.11	41.43	42.51	54.00	11.49	Average
2484.000	28.01	6.18	33.11	41.87	42.95	54.00	11.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

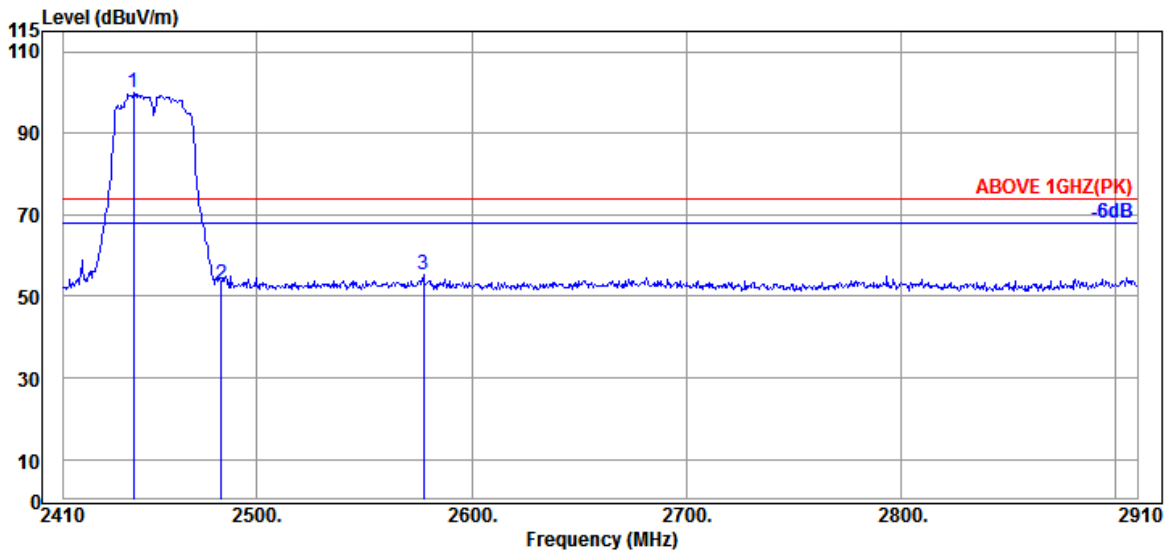

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.500	27.77	6.13	33.15	99.29	100.04	---	---	Peak
2483.500	28.01	6.18	33.11	51.75	52.83	74.00	21.17	Peak
2577.500	28.37	6.32	33.04	53.85	55.50	74.00	18.50	Peak

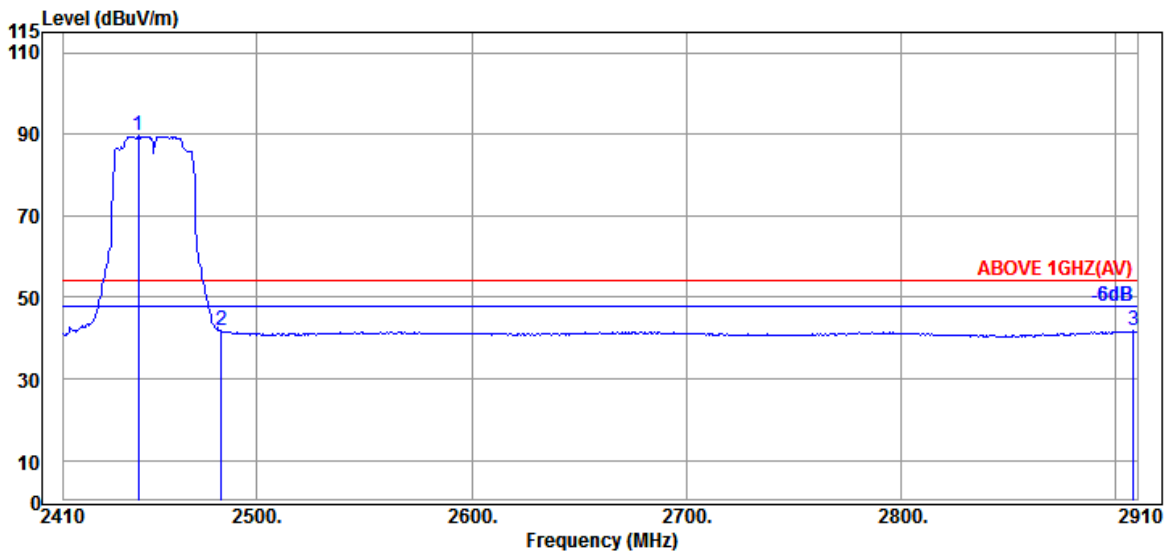


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	27.77	6.13	33.15	88.77	89.52	---	---	Average
2483.500	28.01	6.18	33.11	40.73	41.81	54.00	12.19	Average
2908.000	29.20	6.73	32.81	38.69	41.81	54.00	12.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

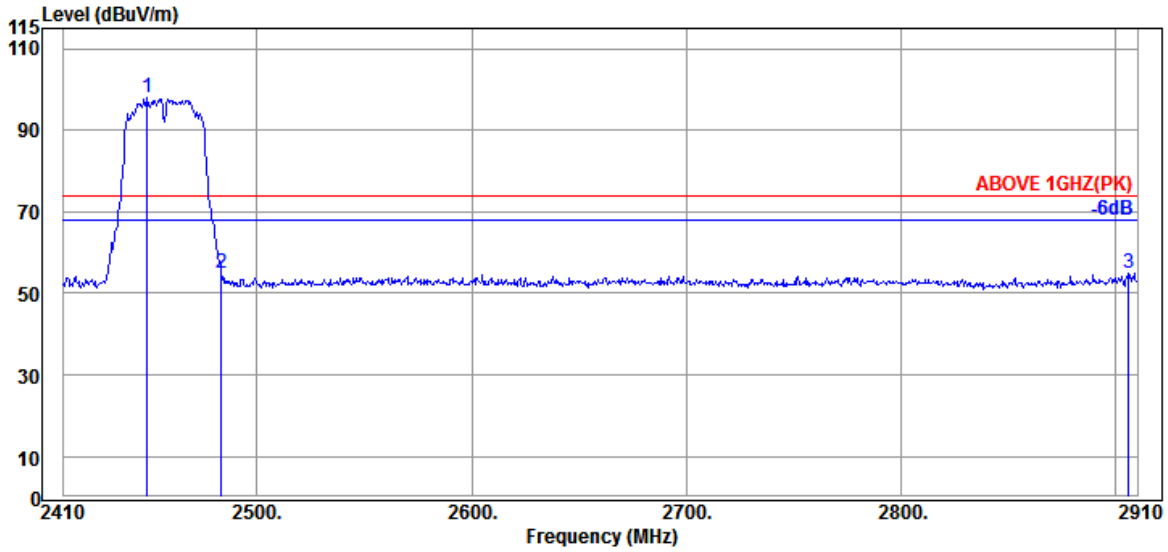

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.000	27.80	6.13	33.15	97.19	97.97	---	---	Peak
2483.500	28.01	6.18	33.11	54.04	55.12	74.00	18.88	Peak
2906.000	29.20	6.73	32.81	51.87	54.99	74.00	19.01	Peak

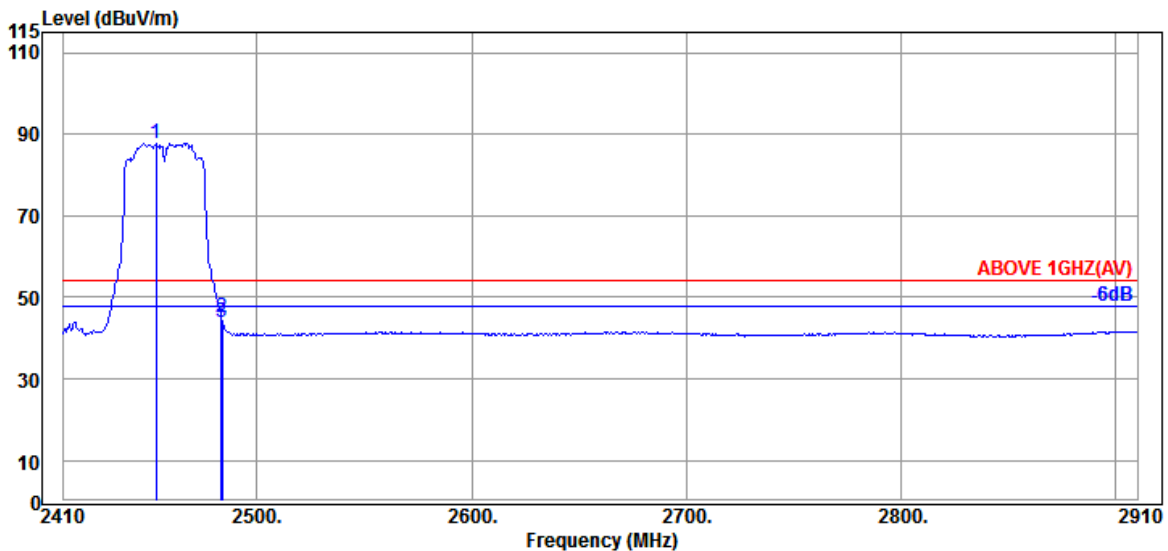


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	27.80	6.13	33.14	86.95	87.74	---	---	Average
2483.500	28.01	6.18	33.11	43.96	45.04	54.00	8.96	Average
2484.000	28.01	6.18	33.11	42.68	43.76	54.00	10.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

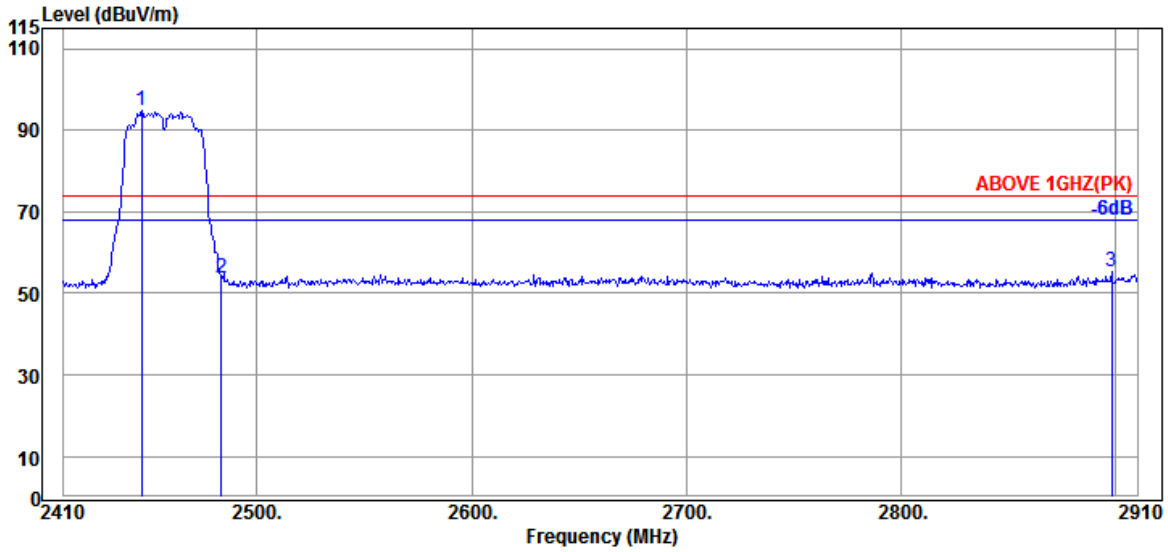

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	27.80	6.13	33.15	93.94	94.72	---	---	Peak
2483.500	28.01	6.18	33.11	52.82	53.90	74.00	20.10	Peak
2898.000	29.20	6.73	32.81	52.34	55.46	74.00	18.54	Peak

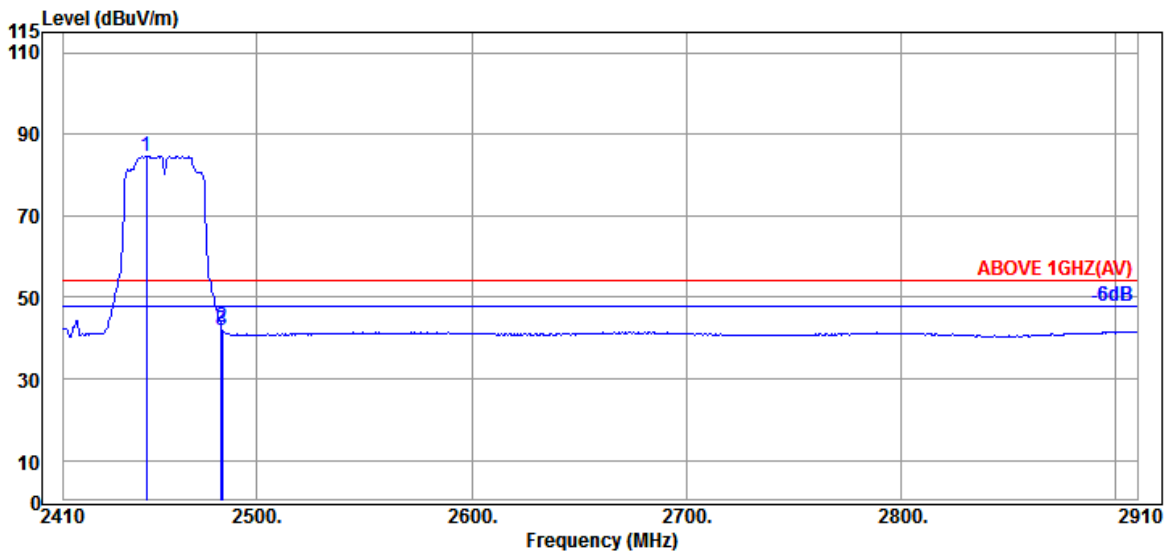


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.500	27.80	6.13	33.15	83.86	84.64	---	---	Average
2483.500	28.01	6.18	33.11	41.68	42.76	54.00	11.24	Average
2484.000	28.01	6.18	33.11	40.92	42.00	54.00	12.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

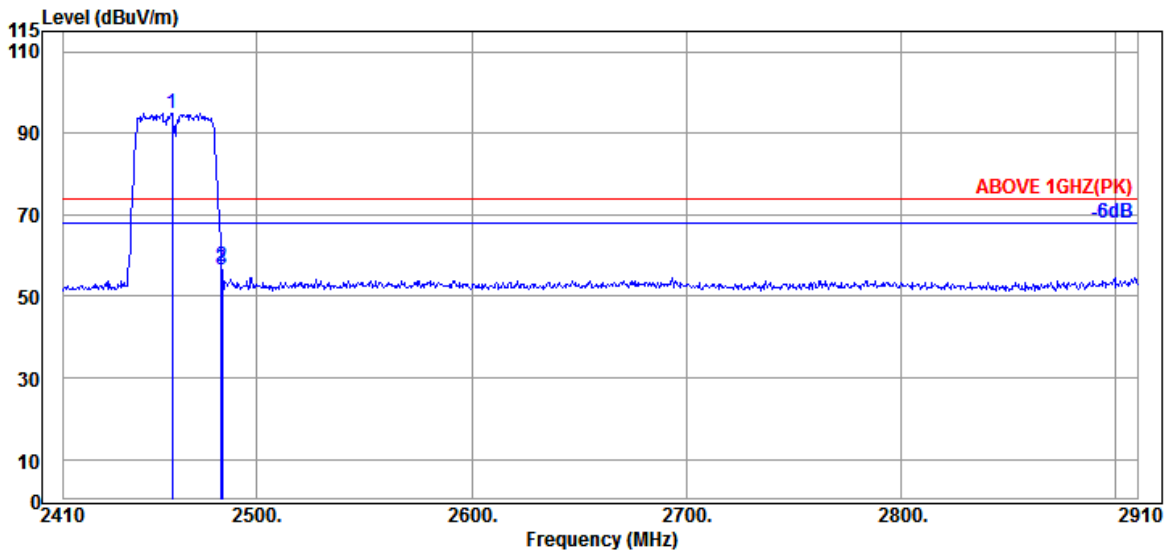

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	27.89	6.15	33.13	94.03	94.94	---	---	Peak
2483.500	28.01	6.18	33.11	56.18	57.26	74.00	16.74	Peak
2484.000	28.01	6.18	33.11	55.58	56.66	74.00	17.34	Peak

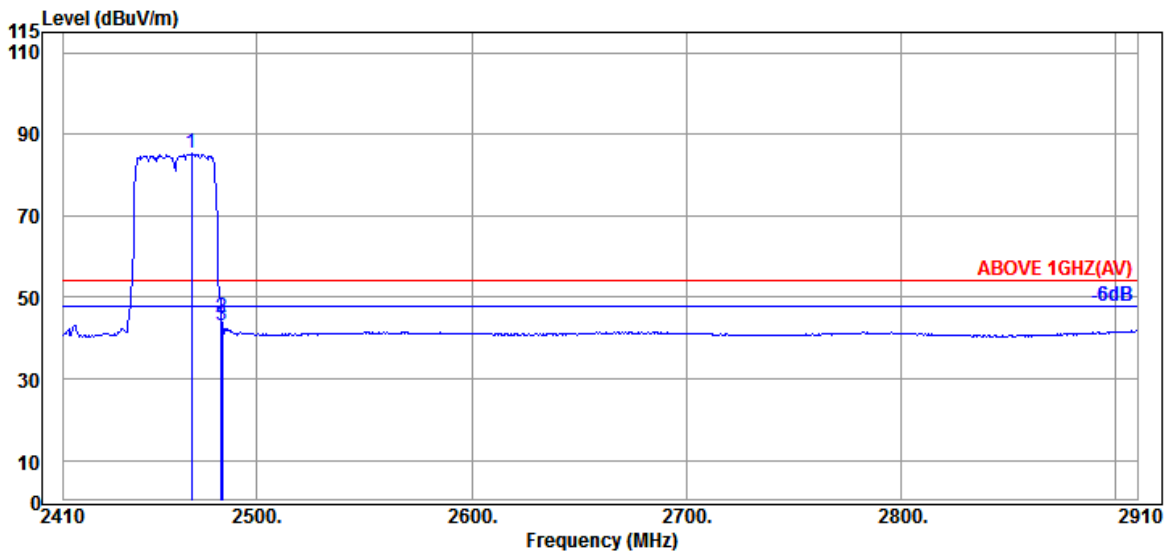


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	27.93	6.15	33.13	84.28	85.23	---	---	Average
2483.500	28.01	6.18	33.11	44.12	45.20	54.00	8.80	Average
2484.000	28.01	6.18	33.11	42.19	43.27	54.00	10.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

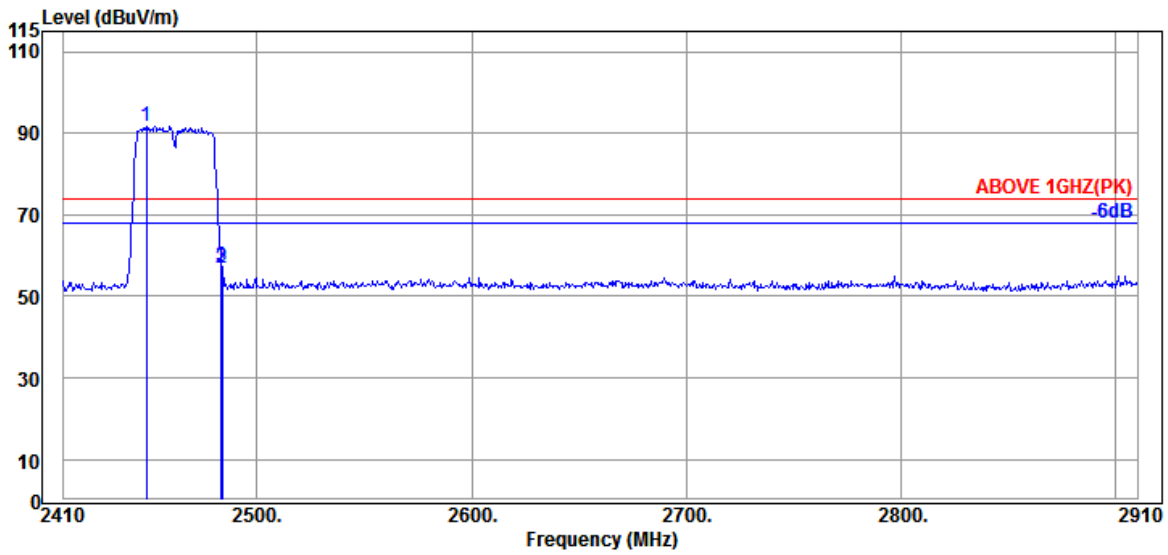

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.500	27.80	6.13	33.15	90.89	91.67	---	---	Peak
2483.500	28.01	6.18	33.11	55.66	56.74	74.00	17.26	Peak
2484.000	28.01	6.18	33.11	56.09	57.17	74.00	16.83	Peak

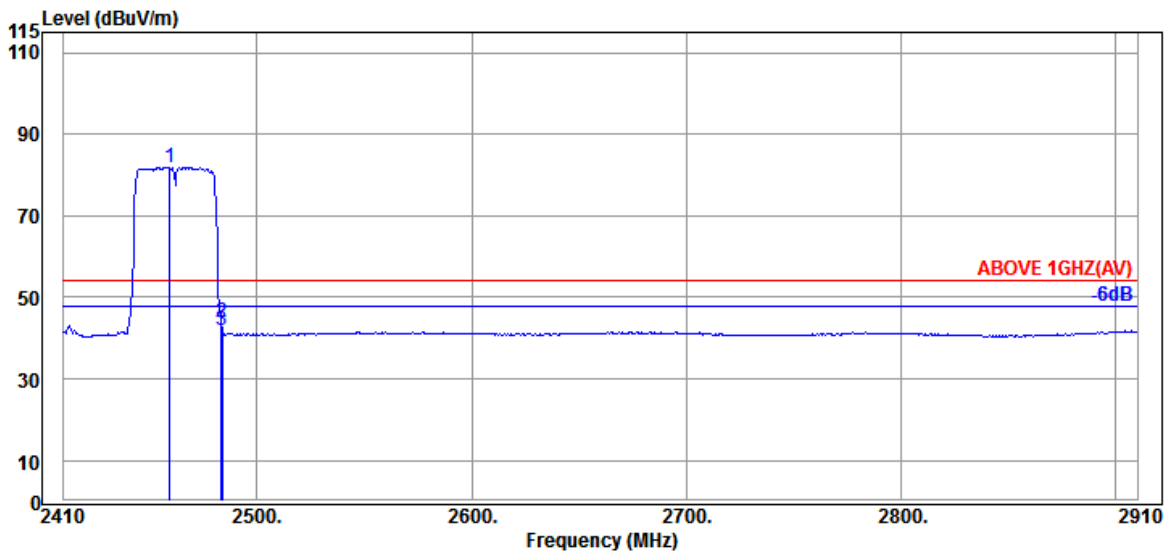


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	81.05	81.91	---	---	Average
2483.500	28.01	6.18	33.11	42.85	43.93	54.00	10.07	Average
2484.000	28.01	6.18	33.11	40.96	42.04	54.00	11.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

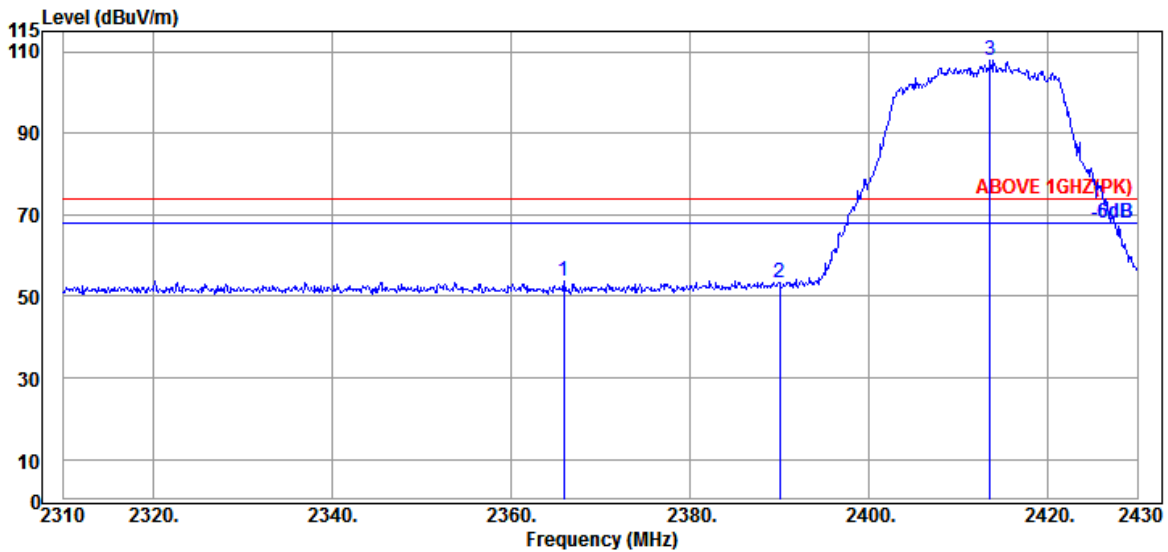

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.920	27.53	5.98	33.21	53.40	53.70	74.00	20.30	Peak
2390.040	27.57	6.04	33.19	52.89	53.31	74.00	20.69	Peak
@ 2413.560	27.66	6.07	33.17	107.45	108.01	---	---	Peak

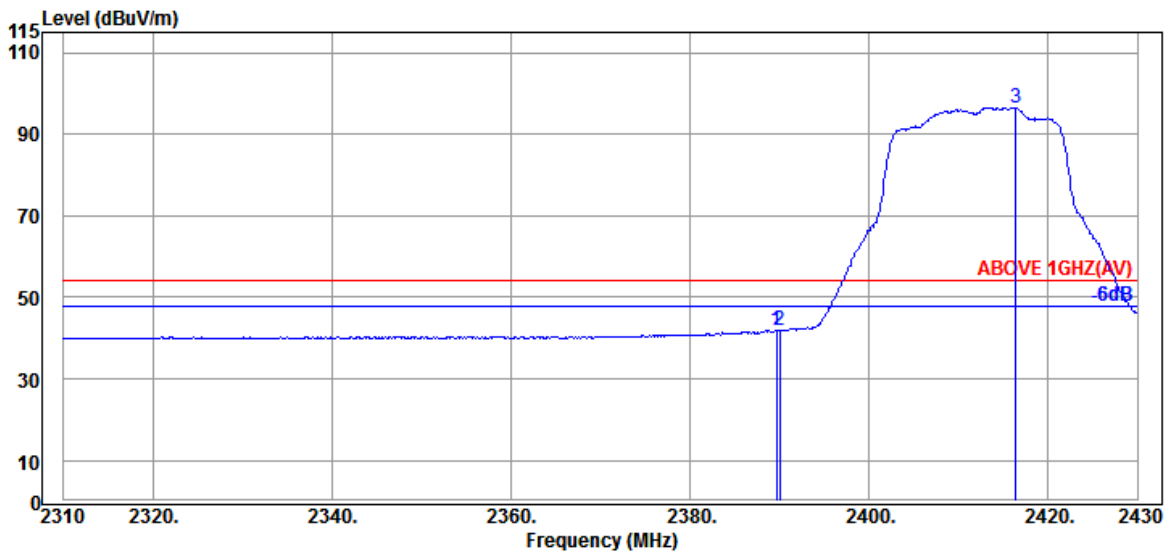


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	41.45	41.87	54.00	12.13	Average
2390.040	27.57	6.04	33.19	41.49	41.91	54.00	12.09	Average
@ 2416.440	27.66	6.07	33.17	95.98	96.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

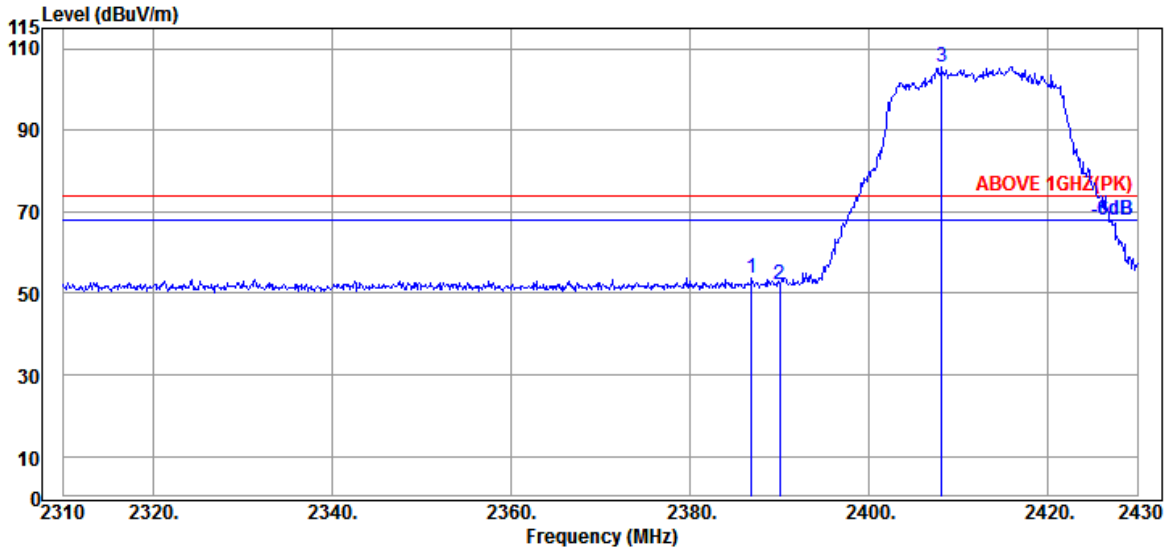

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.920	27.57	6.04	33.20	53.23	53.64	74.00	20.36	Peak
2390.040	27.57	6.04	33.19	51.87	52.29	74.00	21.71	Peak
@ 2408.160	27.63	6.07	33.18	105.06	105.58	---	---	Peak

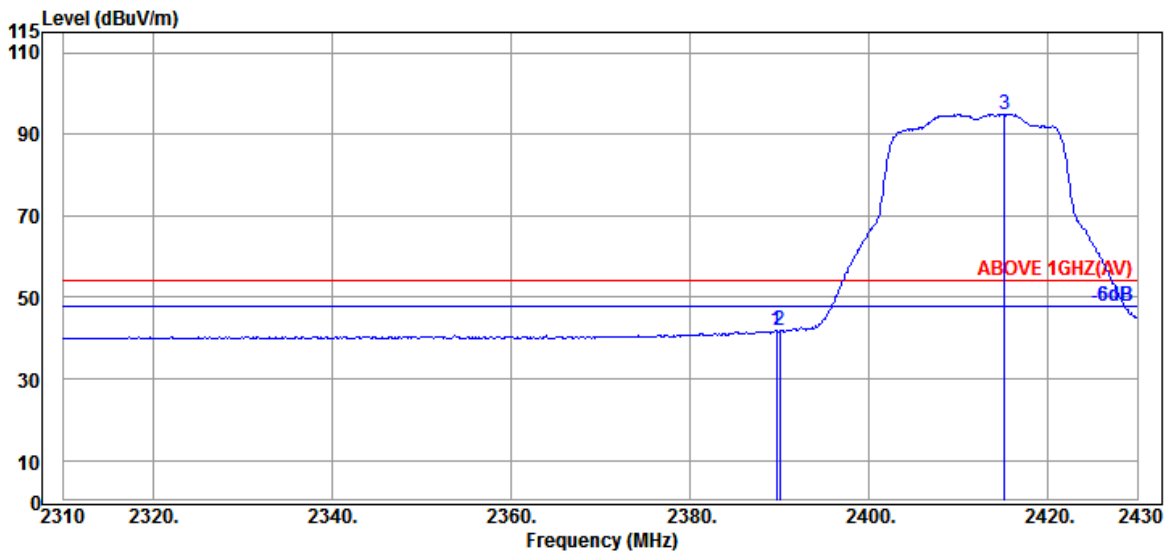


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	41.33	41.75	54.00	12.25	Average
2390.040	27.57	6.04	33.19	41.31	41.73	54.00	12.27	Average
@ 2415.120	27.66	6.07	33.17	94.34	94.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

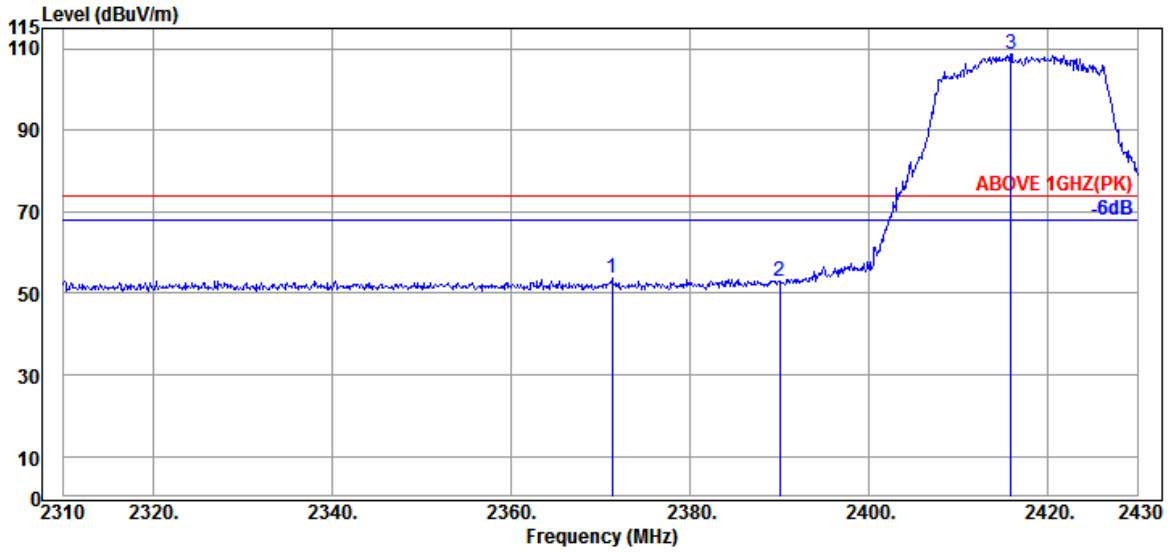

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.320	27.54	6.01	33.21	53.26	53.60	74.00	20.40	Peak
2390.040	27.57	6.04	33.19	52.56	52.98	74.00	21.02	Peak
@ 2415.840	27.66	6.07	33.17	108.19	108.75	---	---	Peak

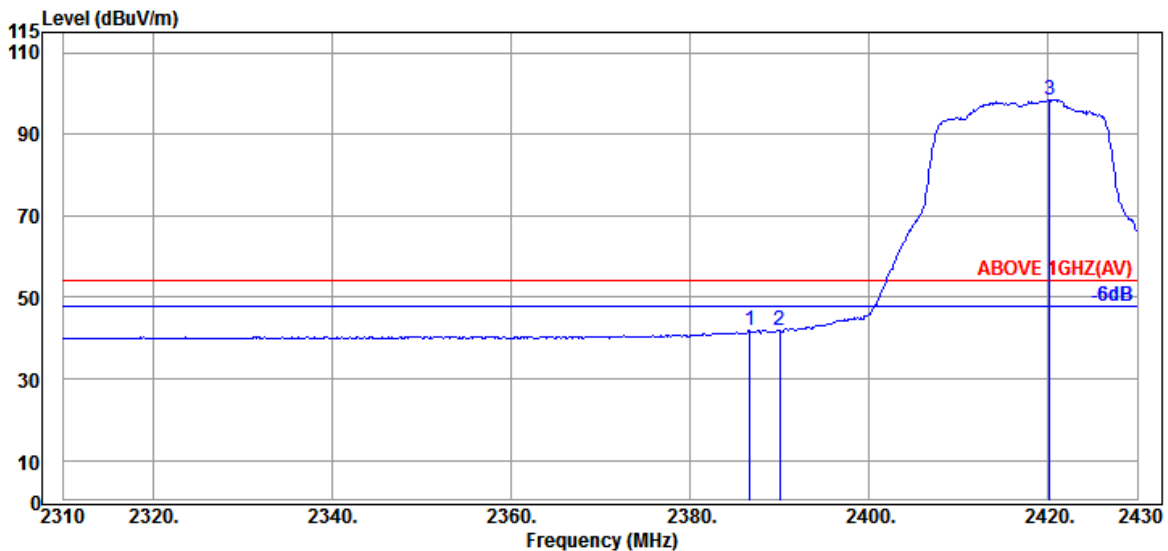


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.680	27.57	6.04	33.20	41.49	41.90	54.00	12.10	Average
2390.040	27.57	6.04	33.19	41.44	41.86	54.00	12.14	Average
@ 2420.160	27.69	6.10	33.17	97.84	98.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

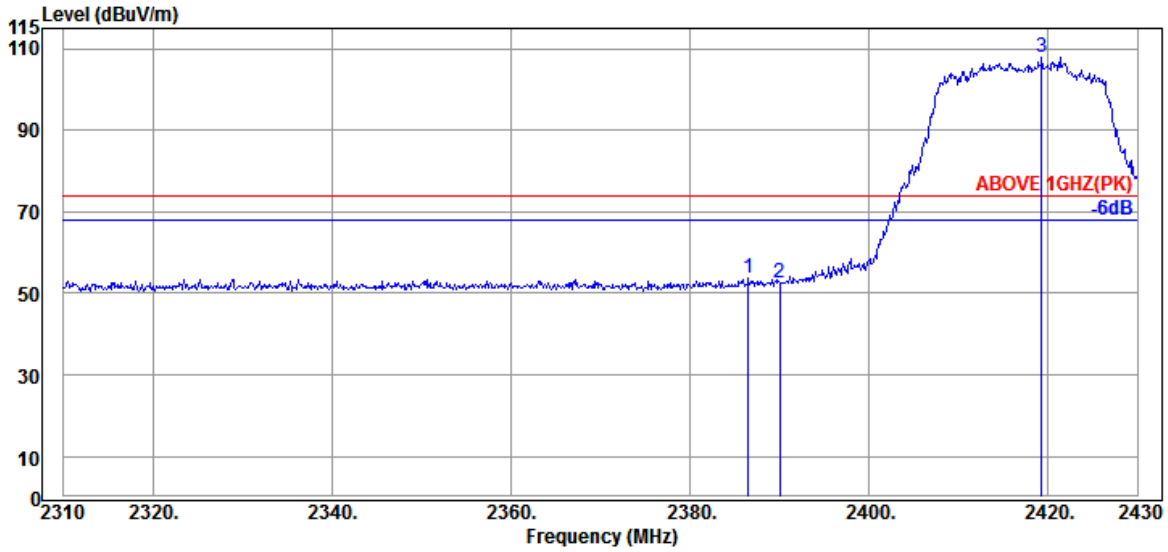

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.560	27.57	6.04	33.20	53.52	53.93	74.00	20.07	Peak
2390.040	27.57	6.04	33.19	52.05	52.47	74.00	21.53	Peak
@ 2419.320	27.69	6.07	33.17	107.26	107.85	---	---	Peak

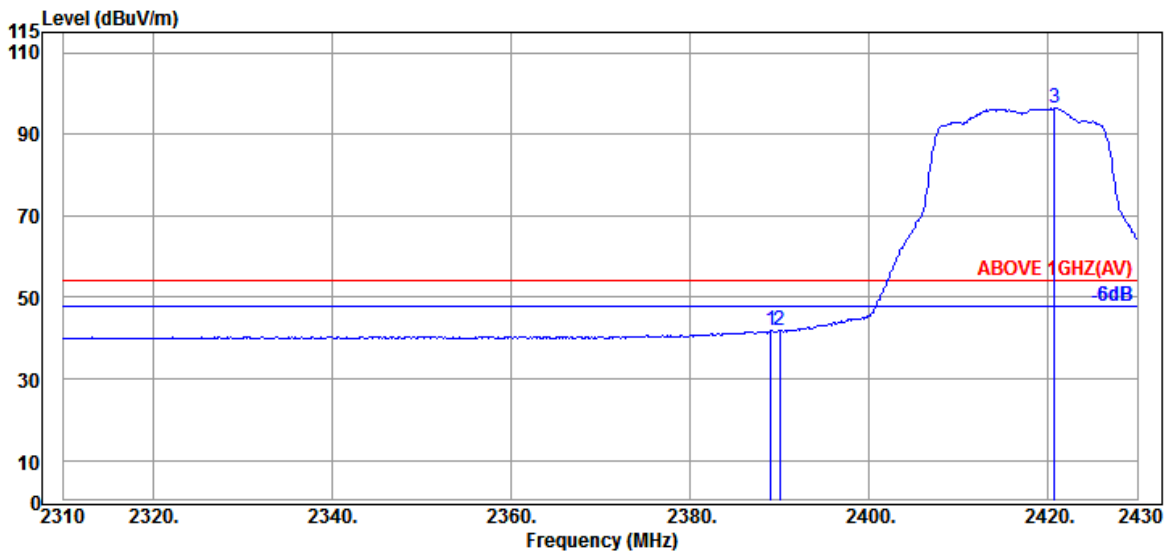


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	27.57	6.04	33.19	41.37	41.79	54.00	12.21	Average
2390.040	27.57	6.04	33.19	41.32	41.74	54.00	12.26	Average
@ 2420.760	27.69	6.10	33.17	95.94	96.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

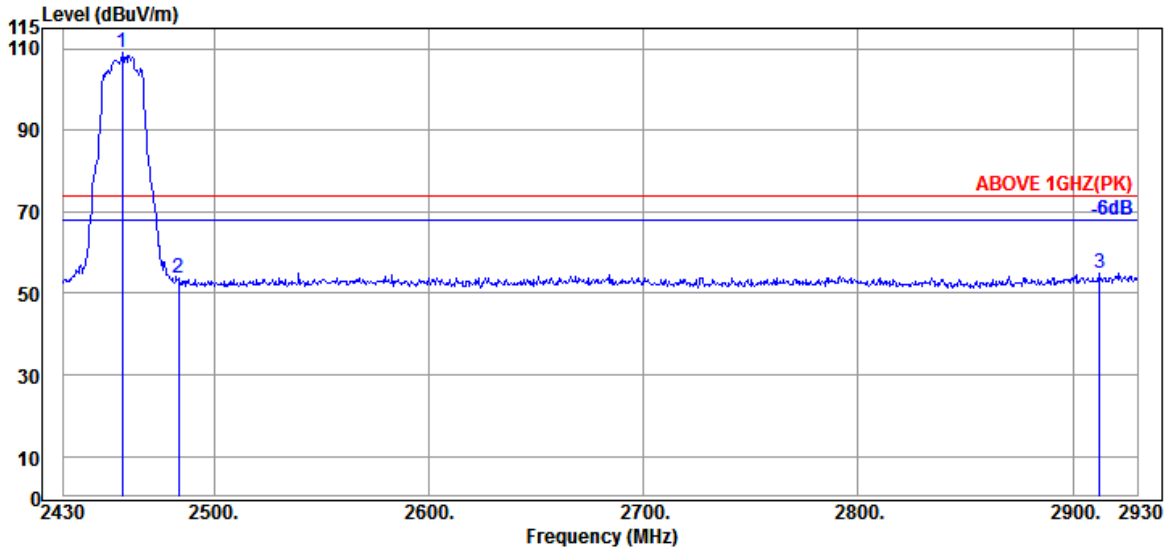

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	27.84	6.15	33.14	108.26	109.11	---	---	Peak
2483.500	28.01	6.18	33.11	52.66	53.74	74.00	20.26	Peak
2912.500	29.20	6.73	32.81	51.77	54.89	74.00	19.11	Peak

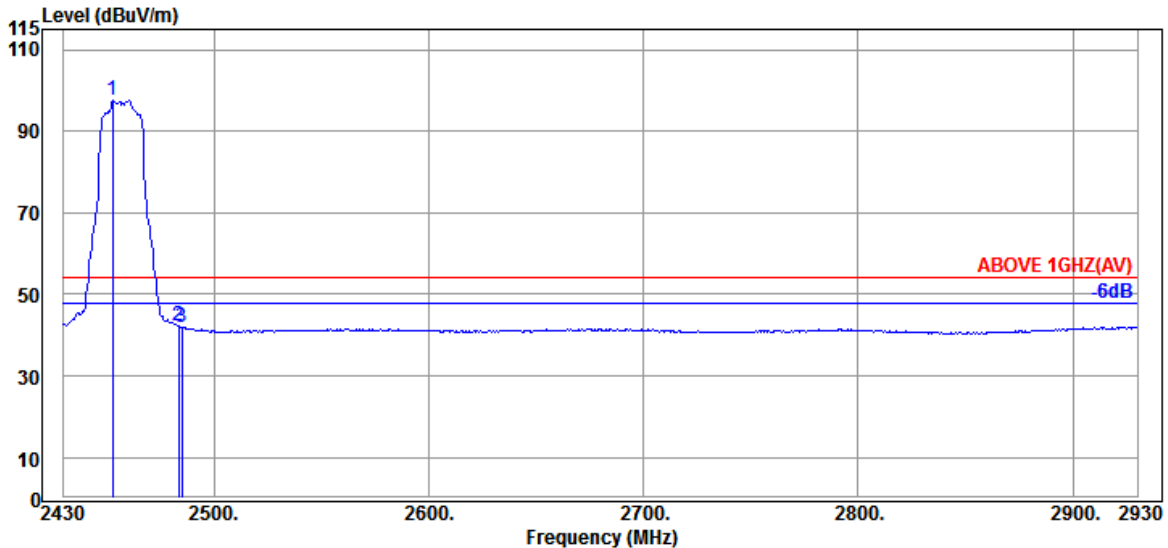


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	27.80	6.13	33.14	96.67	97.46	---	---	Average
2483.500	28.01	6.18	33.11	41.32	42.40	54.00	11.60	Average
2485.000	28.01	6.18	33.11	40.96	42.04	54.00	11.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

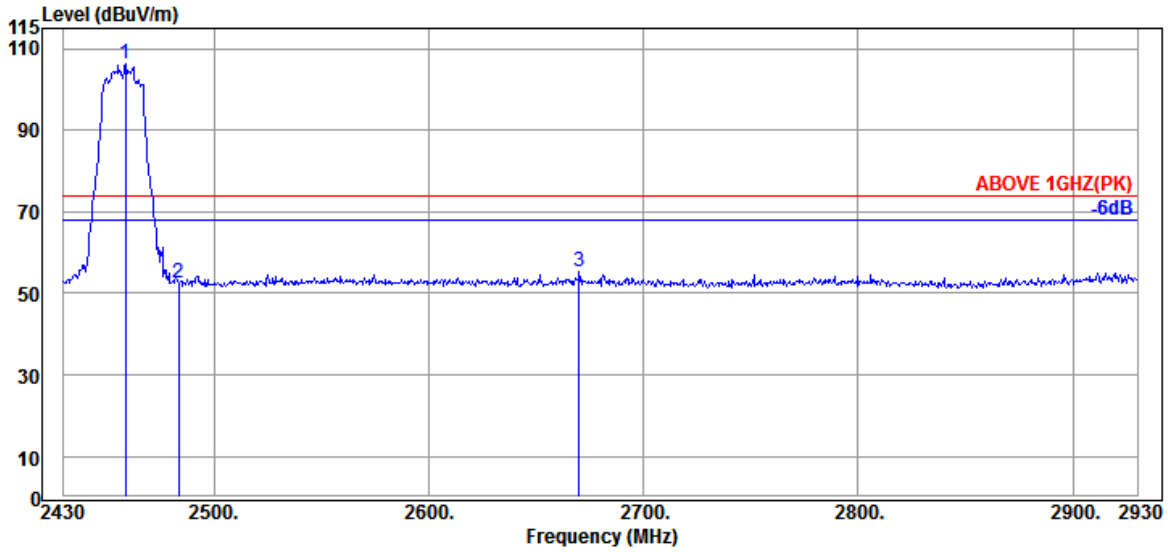

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	27.84	6.15	33.13	105.33	106.19	---	---	Peak
2483.500	28.01	6.18	33.11	51.36	52.44	74.00	21.56	Peak
2670.000	28.84	6.43	32.97	52.90	55.20	74.00	18.80	Peak

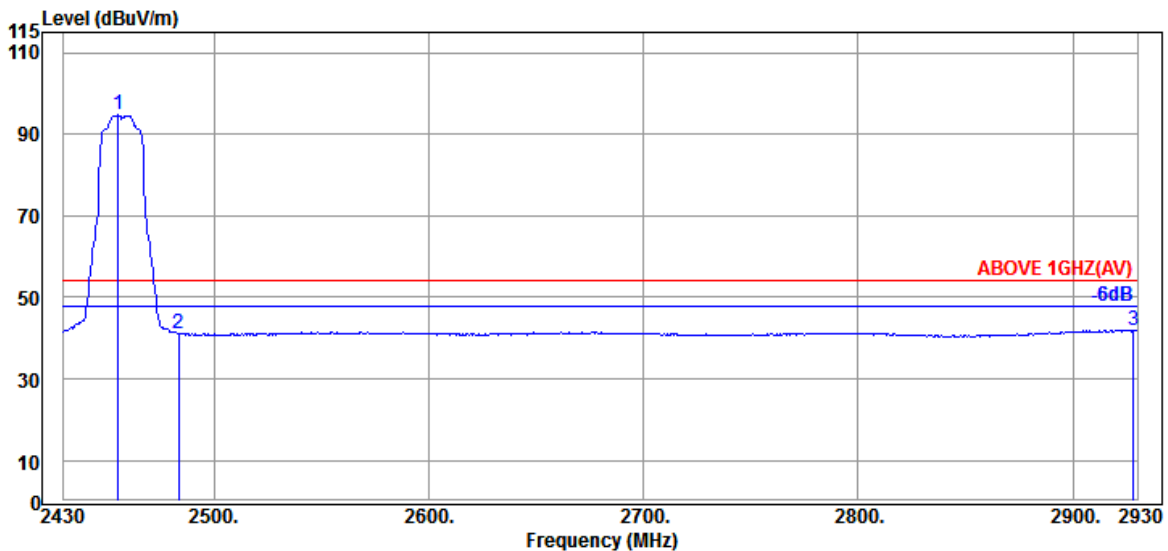


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	27.84	6.15	33.14	93.83	94.68	---	---	Average
2483.500	28.01	6.18	33.11	40.08	41.16	54.00	12.84	Average
2928.000	29.20	6.75	32.79	38.76	41.92	54.00	12.08	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

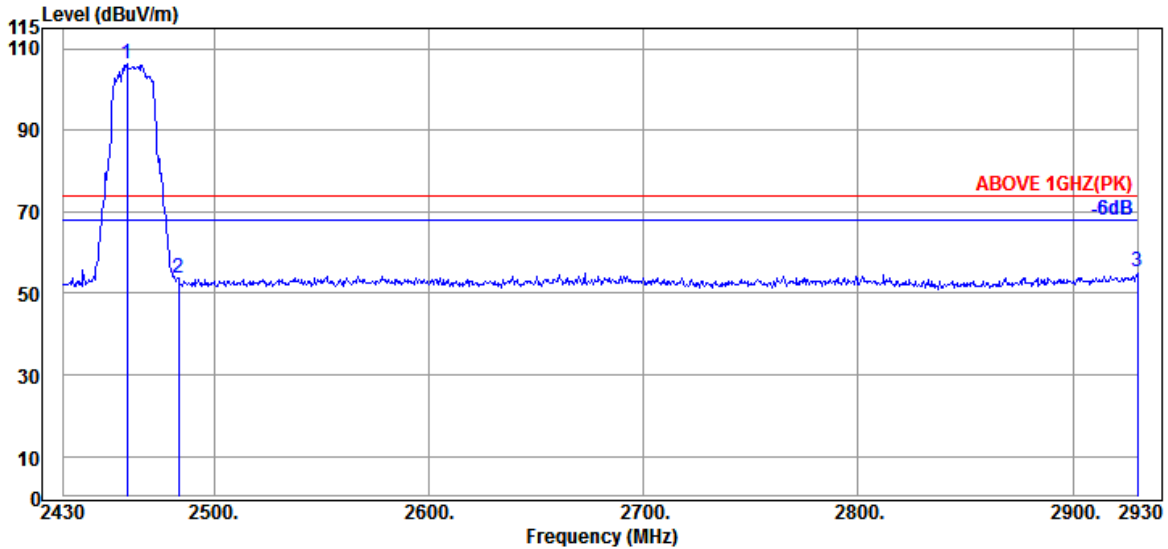

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	105.62	106.48	---	---	Peak
2483.500	28.01	6.18	33.11	52.75	53.83	74.00	20.17	Peak
2930.000	29.20	6.77	32.79	52.04	55.22	74.00	18.78	Peak

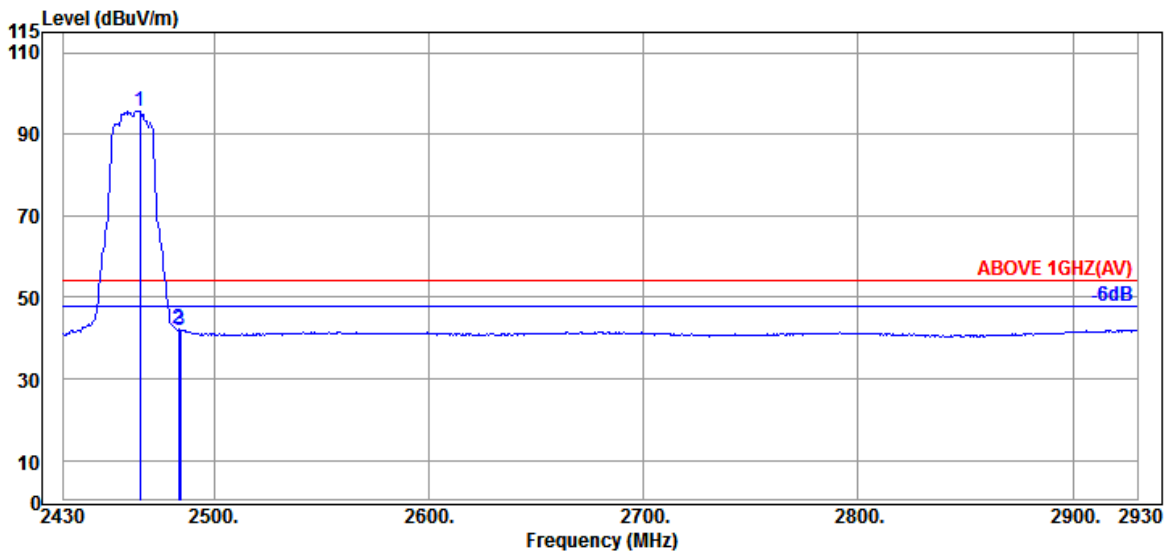


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	27.89	6.15	33.13	94.90	95.81	---	---	Average
2483.500	28.01	6.18	33.11	41.16	42.24	54.00	11.76	Average
2484.500	28.01	6.18	33.11	40.92	42.00	54.00	12.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

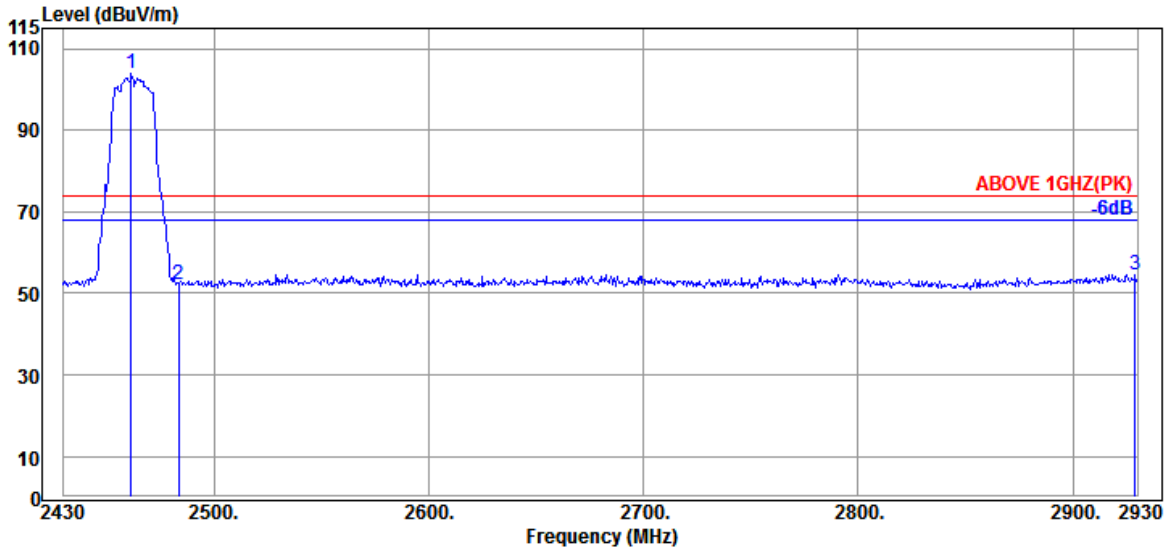

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	27.89	6.15	33.13	102.89	103.80	---	---	Peak
2483.500	28.01	6.18	33.11	51.22	52.30	74.00	21.70	Peak
2929.000	29.20	6.75	32.79	51.53	54.69	74.00	19.31	Peak

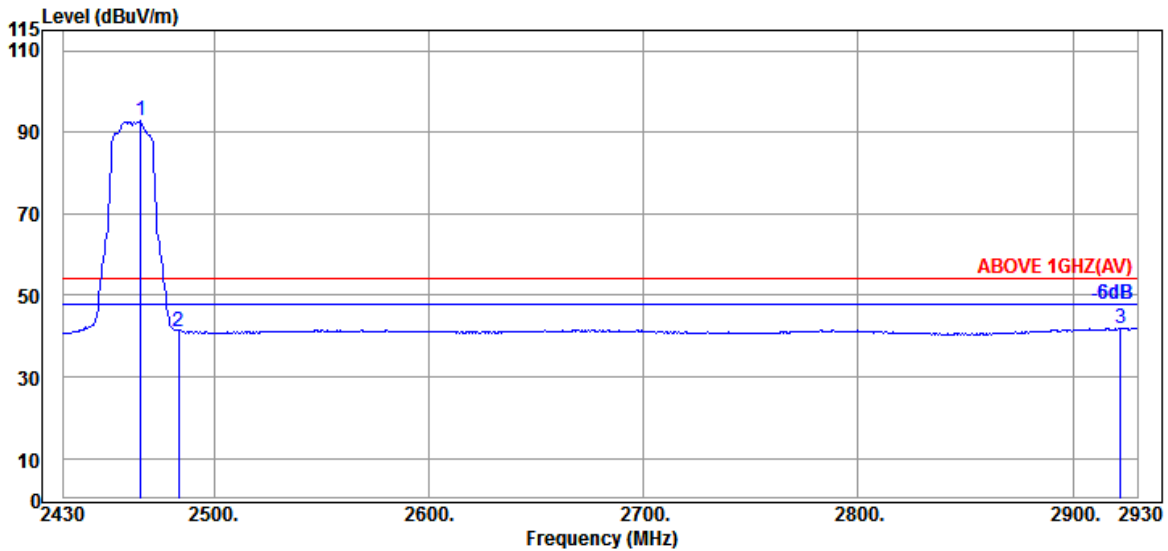


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	91.90	92.81	---	---	Average
2483.500	28.01	6.18	33.11	40.12	41.20	54.00	12.80	Average
2922.000	29.20	6.75	32.80	38.80	41.95	54.00	12.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

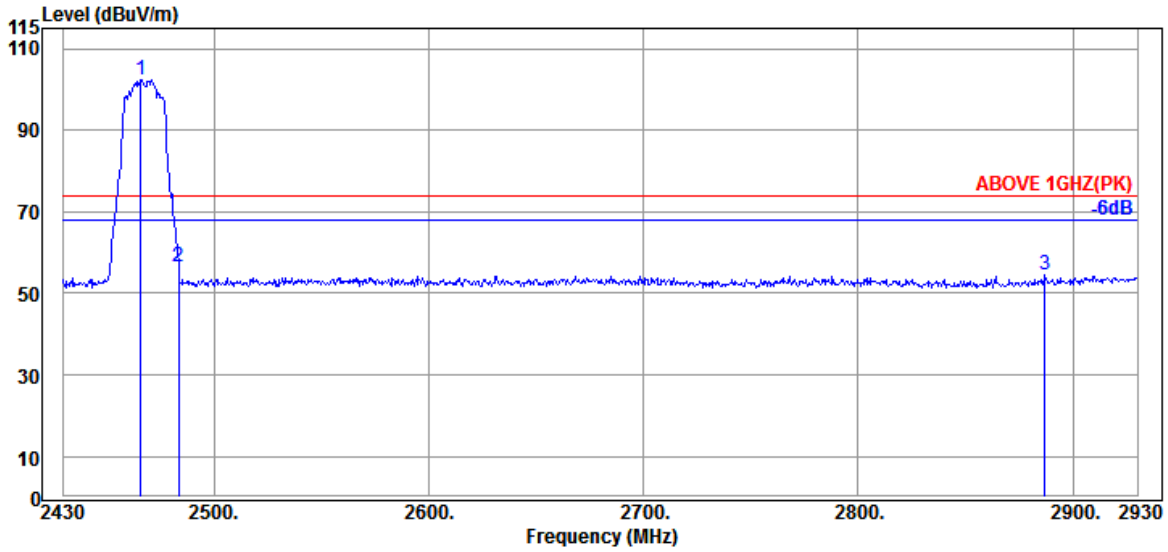

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	101.45	102.36	---	---	Peak
2483.500	28.01	6.18	33.11	55.38	56.46	74.00	17.54	Peak
2887.000	29.15	6.71	32.82	51.31	54.35	74.00	19.65	Peak

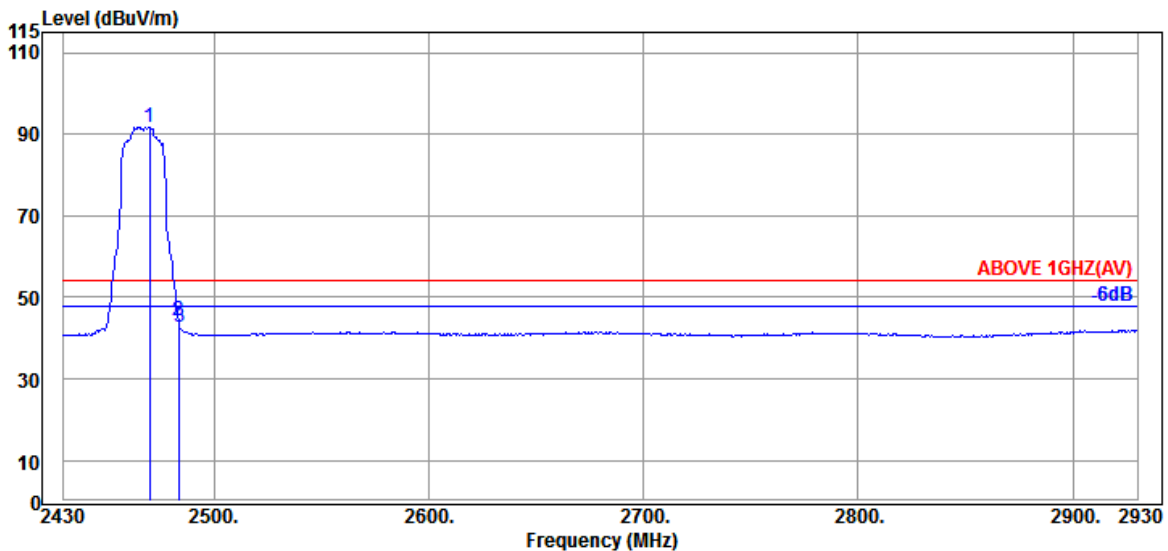


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	27.93	6.15	33.13	90.84	91.79	---	---	Average
2483.500	28.01	6.18	33.11	43.33	44.41	54.00	9.59	Average
2484.000	28.01	6.18	33.11	41.71	42.79	54.00	11.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

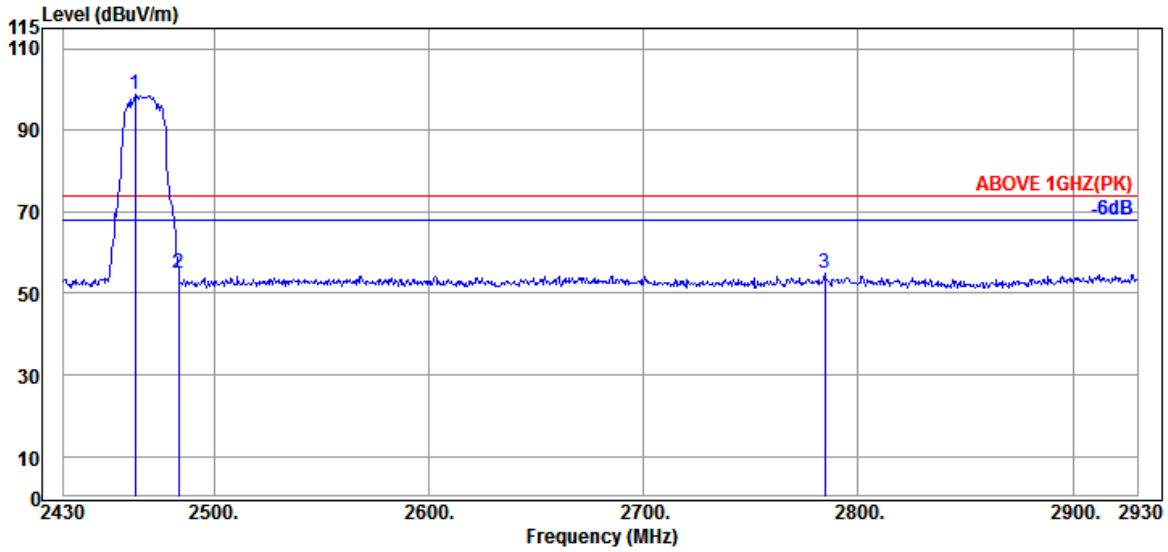

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	27.89	6.15	33.13	97.78	98.69	---	---	Peak
2483.500	28.01	6.18	33.11	53.87	54.95	74.00	19.05	Peak
2784.500	28.83	6.58	32.90	52.40	54.91	74.00	19.09	Peak

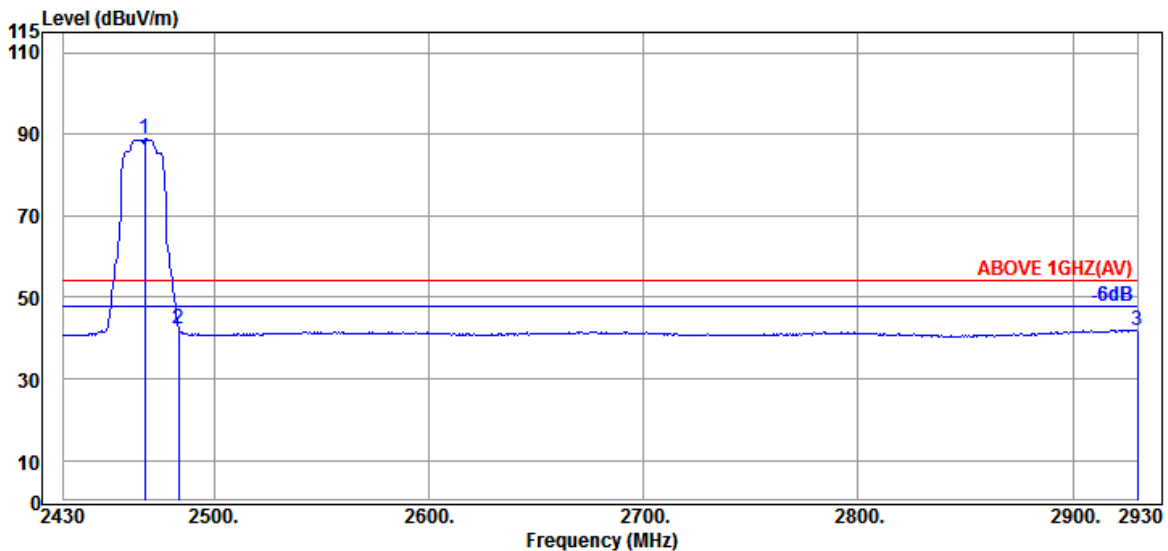


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	27.93	6.15	33.13	87.89	88.84	---	---	Average
2483.500	28.01	6.18	33.11	41.06	42.14	54.00	11.86	Average
2930.000	29.20	6.77	32.79	38.80	41.98	54.00	12.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

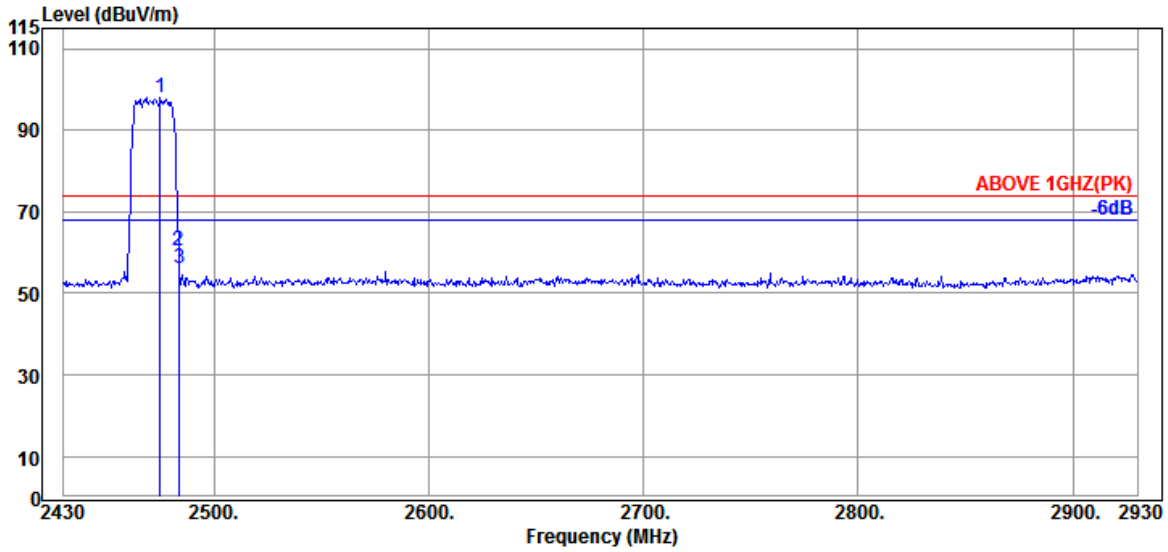

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	27.97	6.18	33.12	97.12	98.15	---	---	Peak
2483.500	28.01	6.18	33.11	59.21	60.29	74.00	13.71	Peak
2484.000	28.01	6.18	33.11	55.21	56.29	74.00	17.71	Peak

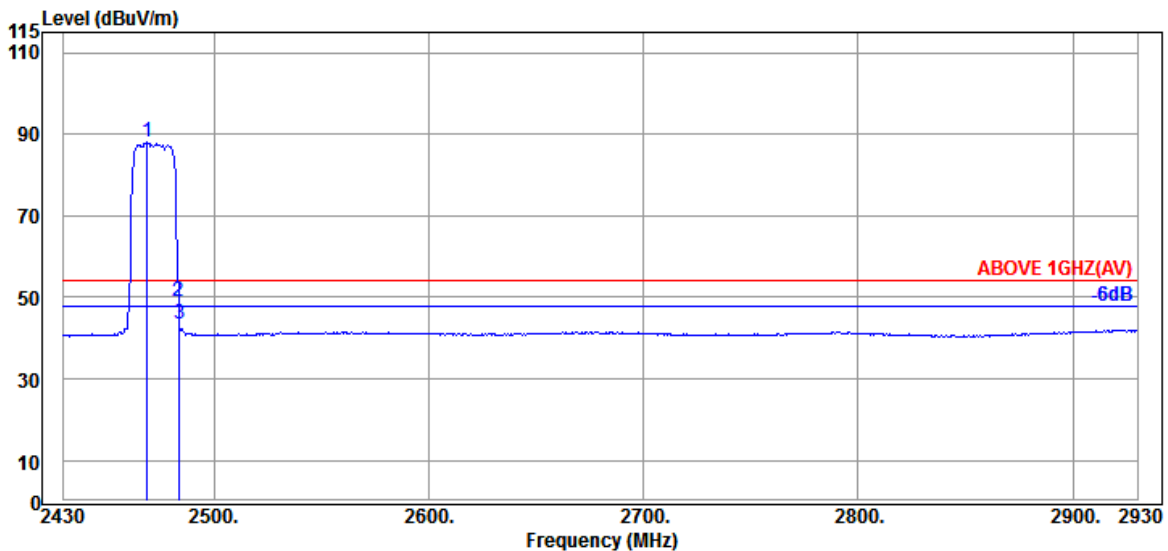


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	27.93	6.15	33.13	86.98	87.93	---	---	Average
2483.500	28.01	6.18	33.11	48.08	49.16	54.00	4.84	Average
2484.000	28.01	6.18	33.11	42.21	43.29	54.00	10.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

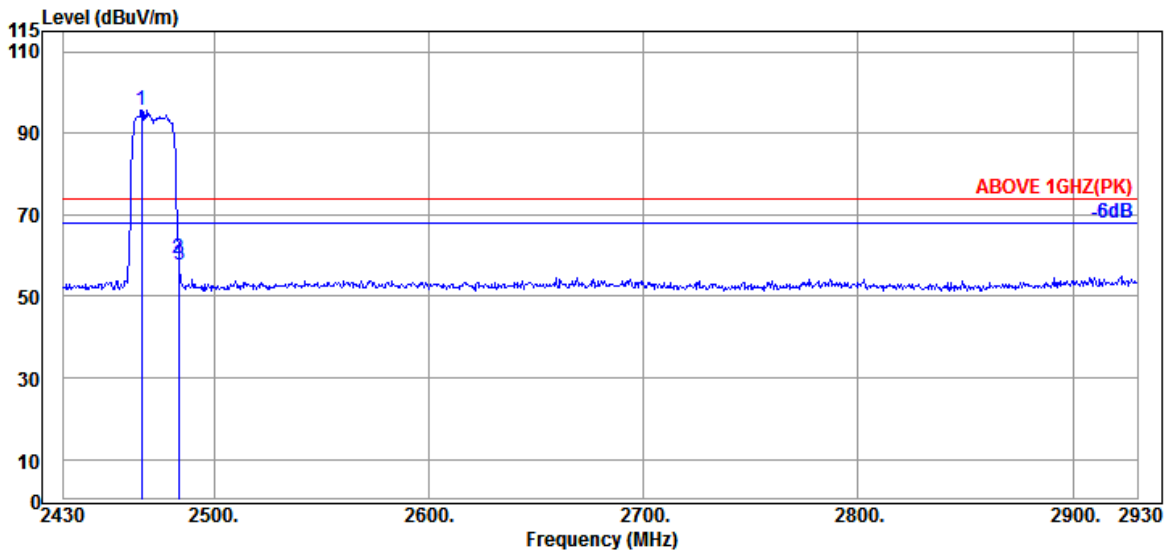

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	94.85	95.76	---	---	Peak
2483.500	28.01	6.18	33.11	58.27	59.35	74.00	14.65	Peak
2484.000	28.01	6.18	33.11	56.51	57.59	74.00	16.41	Peak

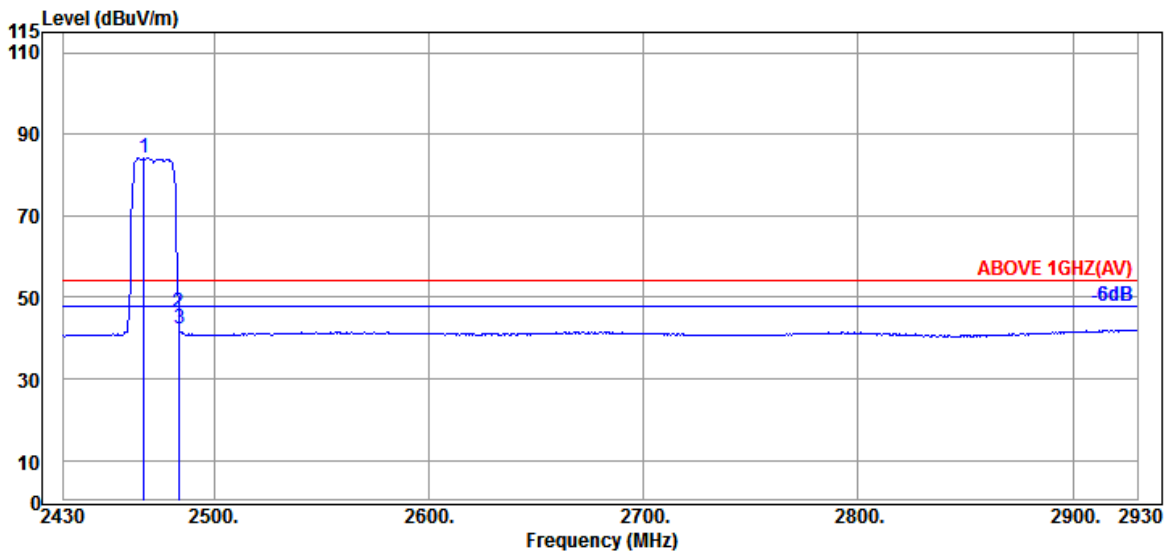


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	83.30	84.21	---	---	Average
2483.500	28.01	6.18	33.11	45.26	46.34	54.00	7.66	Average
2484.000	28.01	6.18	33.11	41.11	42.19	54.00	11.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

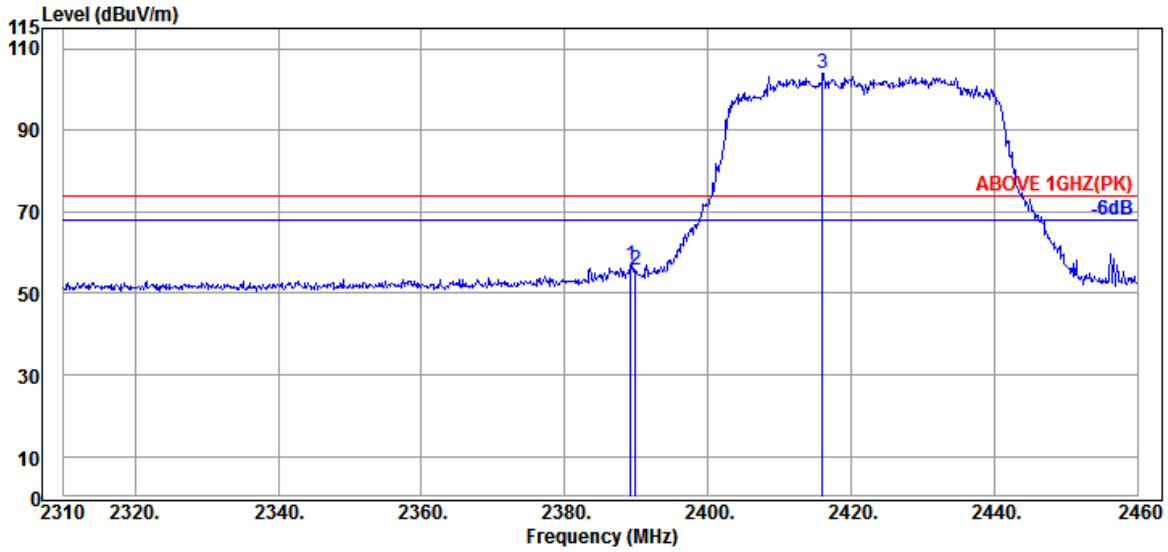

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	56.61	57.03	74.00	16.97	Peak
2389.950	27.57	6.04	33.19	55.11	55.53	74.00	18.47	Peak
@ 2416.050	27.66	6.07	33.17	103.55	104.11	---	---	Peak

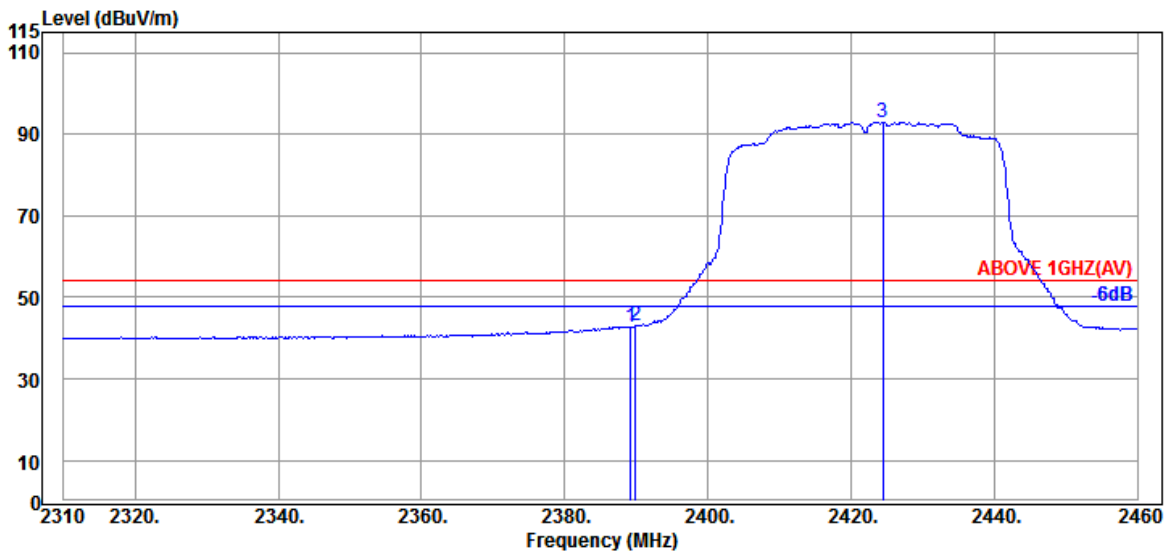


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	42.41	42.83	54.00	11.17	Average
2389.950	27.57	6.04	33.19	42.55	42.97	54.00	11.03	Average
@ 2424.450	27.69	6.10	33.17	92.33	92.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

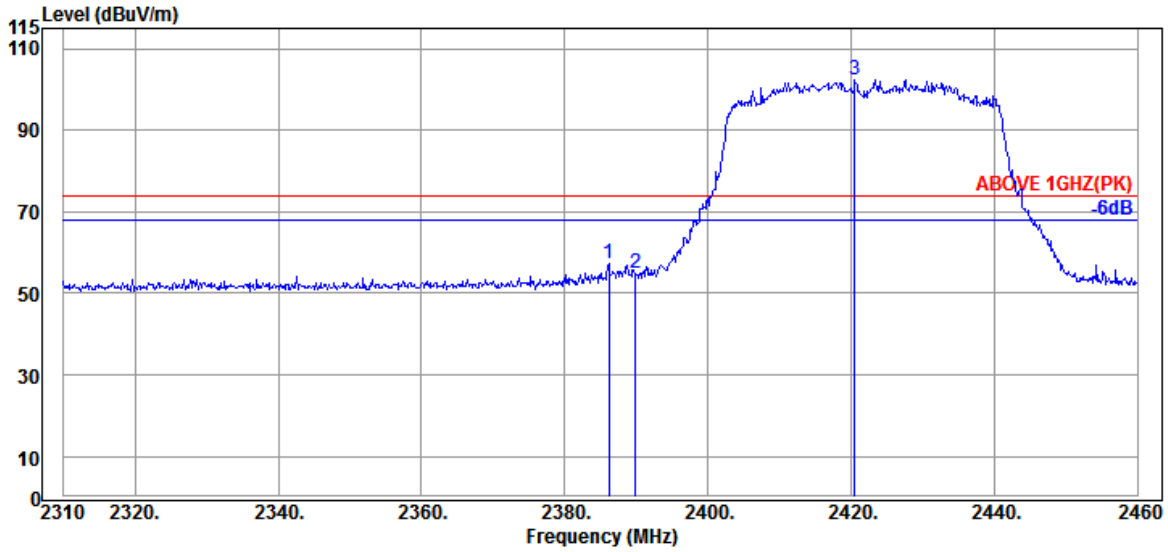

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	27.57	6.04	33.20	56.98	57.39	74.00	16.61	Peak
2389.950	27.57	6.04	33.19	54.35	54.77	74.00	19.23	Peak
@ 2420.550	27.69	6.10	33.17	101.83	102.45	---	---	Peak

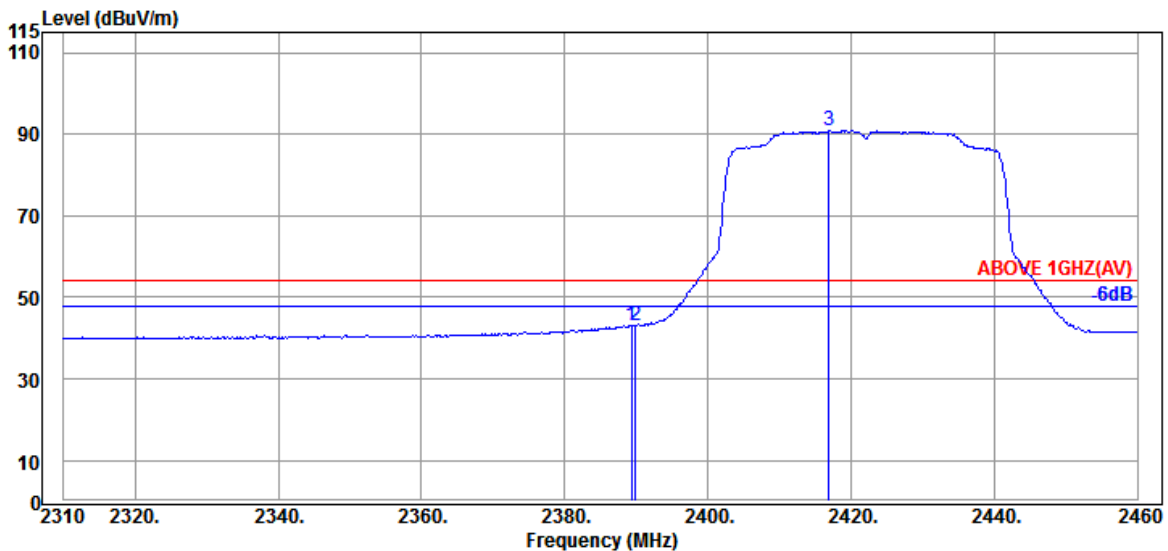


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	27.57	6.04	33.19	42.80	43.22	54.00	10.78	Average
2389.950	27.57	6.04	33.19	42.47	42.89	54.00	11.11	Average
@ 2416.950	27.66	6.07	33.17	90.33	90.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

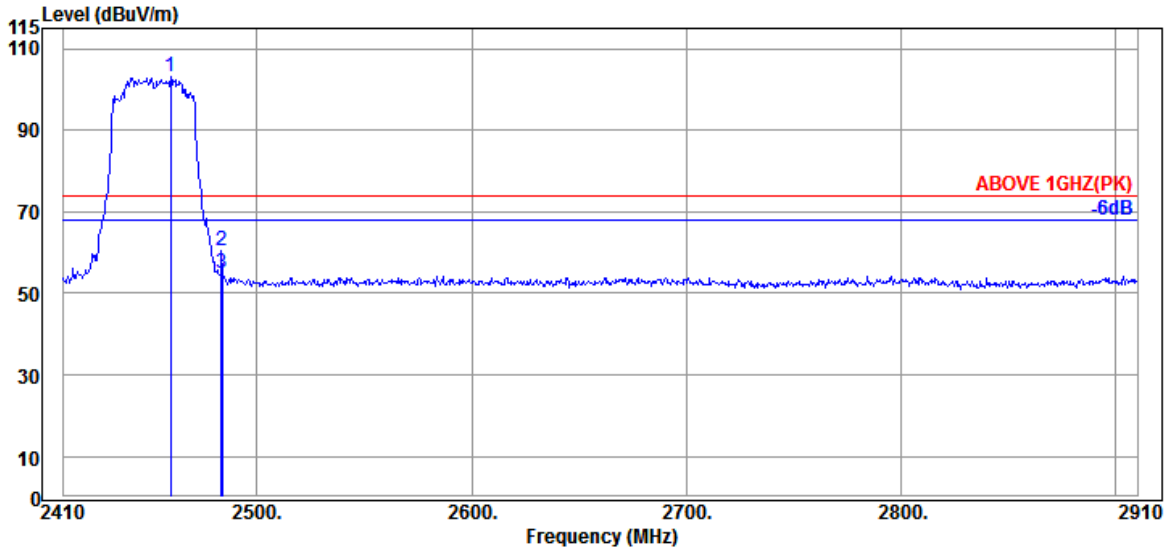

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	102.28	103.14	---	---	Peak
2483.500	28.01	6.18	33.11	59.45	60.53	74.00	13.47	Peak
2484.000	28.01	6.18	33.11	53.95	55.03	74.00	18.97	Peak

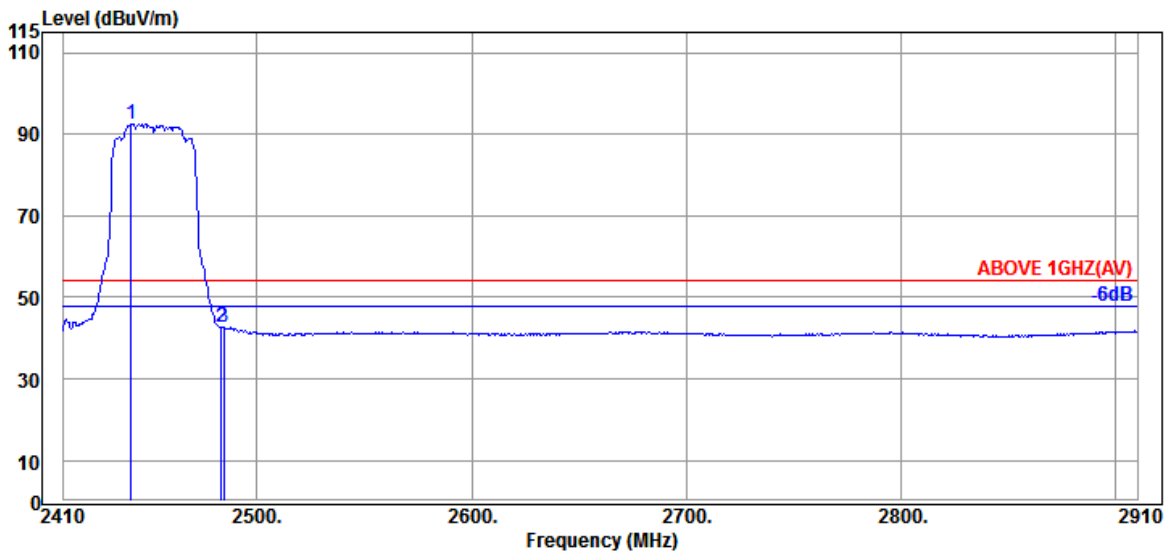


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.500	27.77	6.13	33.15	91.78	92.53	---	---	Average
2483.500	28.01	6.18	33.11	41.72	42.80	54.00	11.20	Average
2484.500	28.01	6.18	33.11	41.77	42.85	54.00	11.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

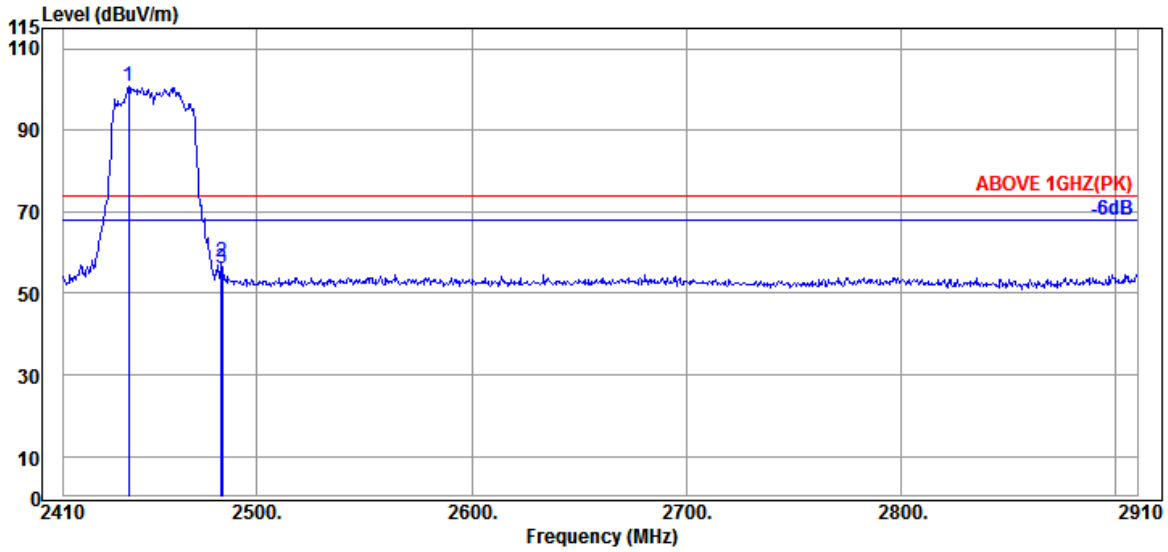

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.500	27.77	6.13	33.15	99.98	100.73	---	---	Peak
2483.500	28.01	6.18	33.11	56.43	57.51	74.00	16.49	Peak
2484.000	28.01	6.18	33.11	54.95	56.03	74.00	17.97	Peak

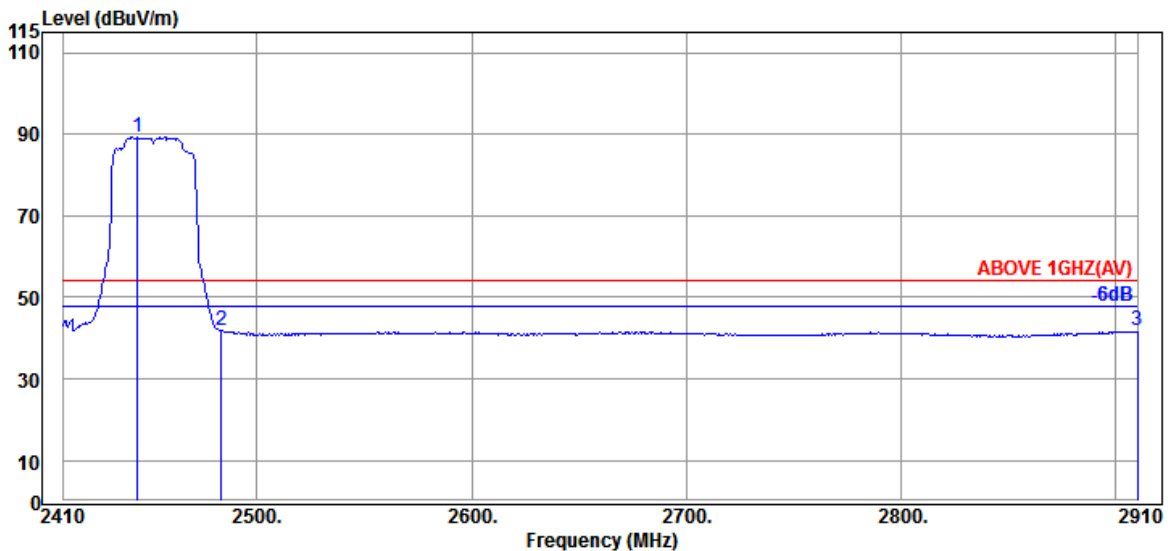


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.500	27.77	6.13	33.15	88.45	89.20	---	---	Average
2483.500	28.01	6.18	33.11	40.69	41.77	54.00	12.23	Average
2910.000	29.20	6.73	32.81	38.71	41.83	54.00	12.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

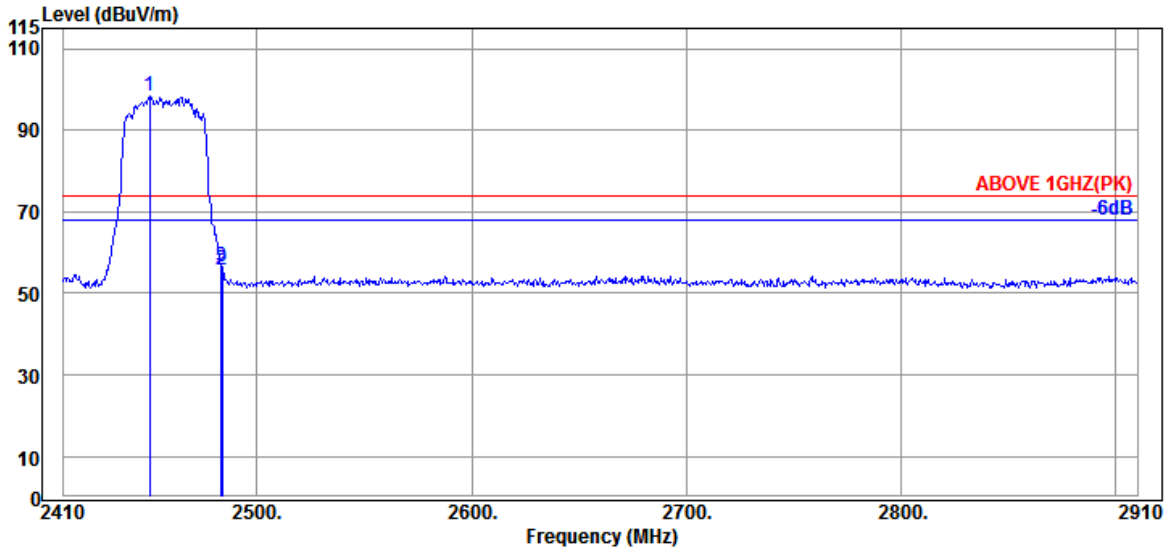

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.000	27.80	6.13	33.15	97.54	98.32	---	---	Peak
2483.500	28.01	6.18	33.11	54.76	55.84	74.00	18.16	Peak
2484.000	28.01	6.18	33.11	55.46	56.54	74.00	17.46	Peak

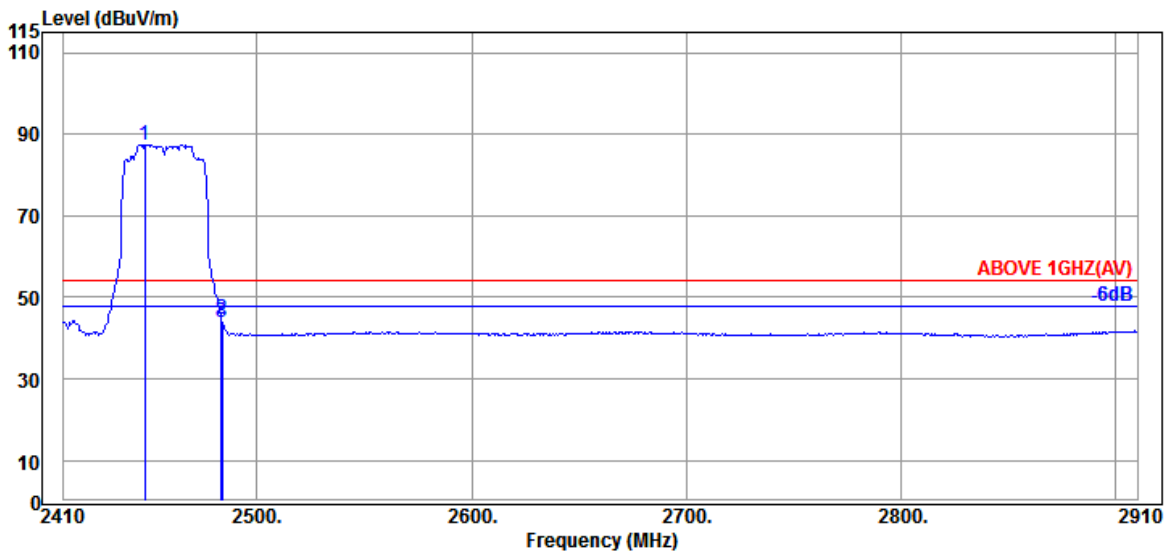


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.000	27.80	6.13	33.15	86.65	87.43	---	---	Average
2483.500	28.01	6.18	33.11	43.52	44.60	54.00	9.40	Average
2484.000	28.01	6.18	33.11	42.91	43.99	54.00	10.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

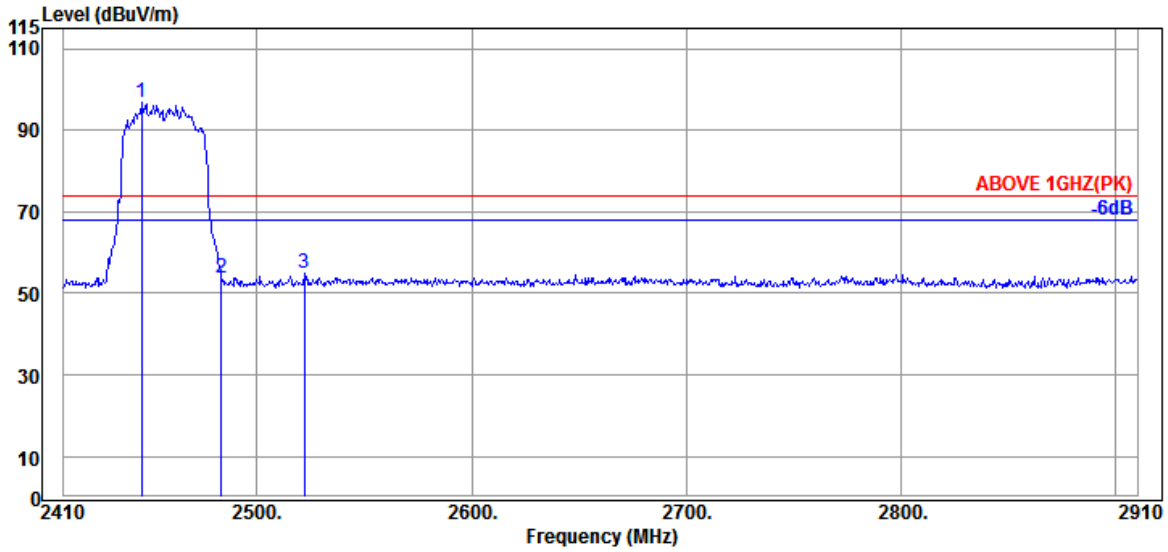

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	27.80	6.13	33.15	95.96	96.74	---	---	Peak
2483.500	28.01	6.18	33.11	52.66	53.74	74.00	20.26	Peak
2522.000	28.14	6.25	33.09	53.61	54.91	74.00	19.09	Peak

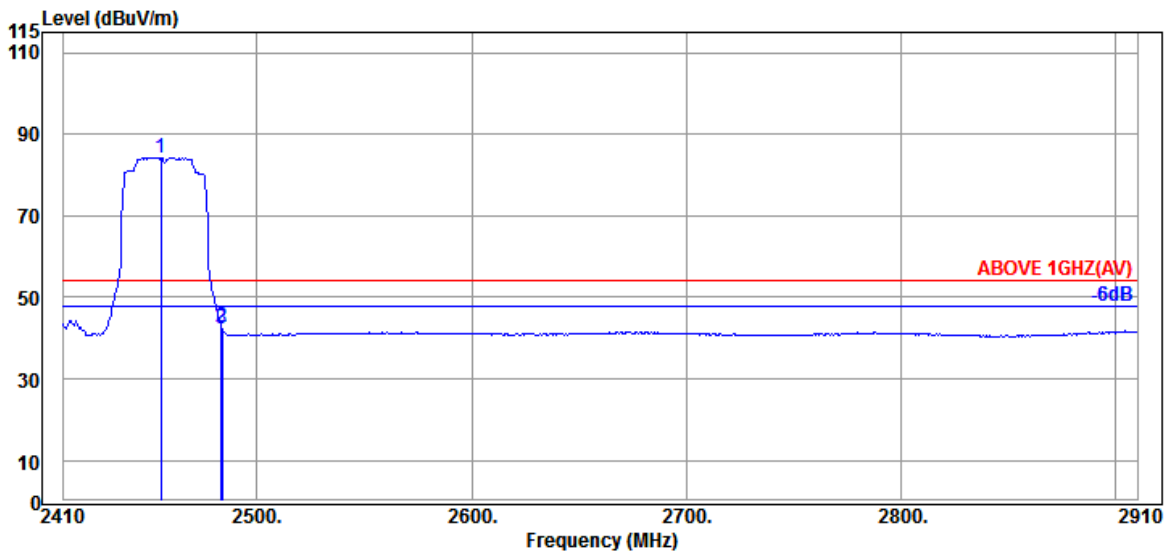


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	27.84	6.15	33.14	83.40	84.25	---	---	Average
2483.500	28.01	6.18	33.11	41.73	42.81	54.00	11.19	Average
2484.000	28.01	6.18	33.11	41.29	42.37	54.00	11.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

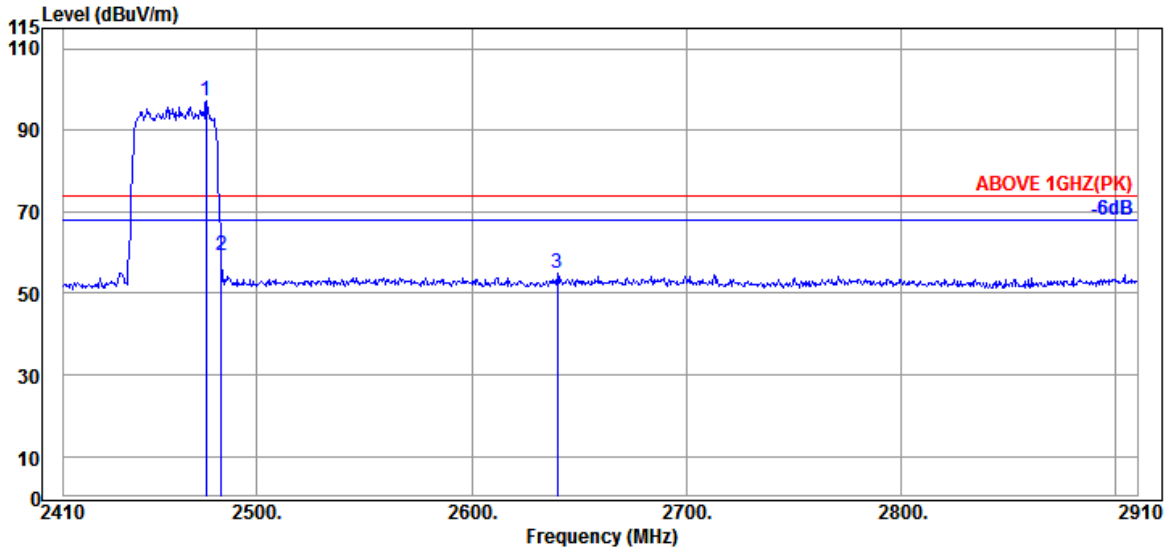

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	27.97	6.18	33.12	96.11	97.14	---	---	Peak
2483.500	28.01	6.18	33.11	58.16	59.24	74.00	14.76	Peak
2640.000	28.75	6.38	33.00	52.80	54.93	74.00	19.07	Peak

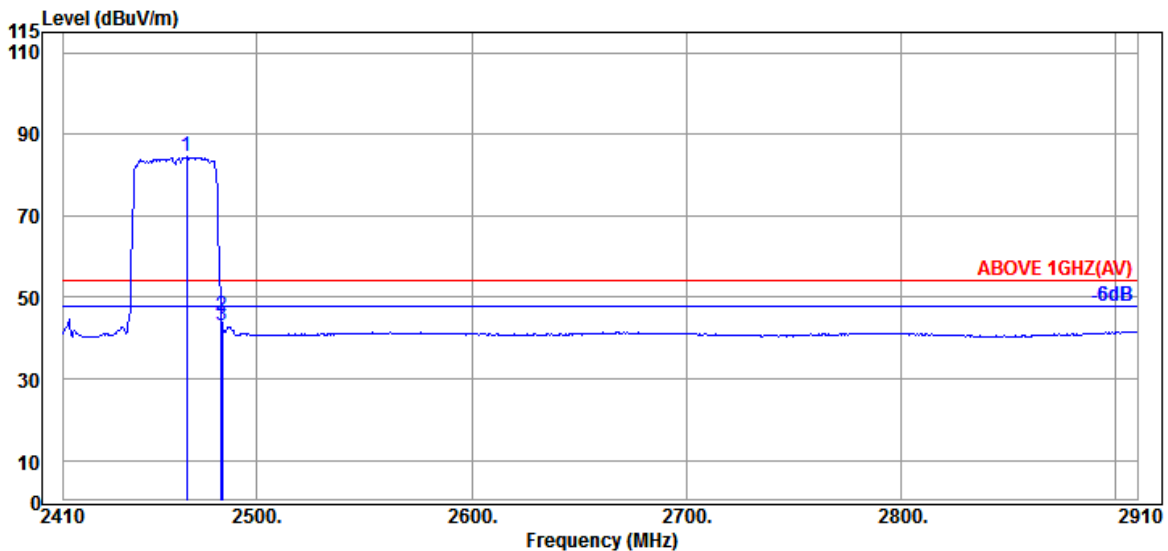


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	83.51	84.42	---	---	Average
2483.500	28.01	6.18	33.11	44.45	45.53	54.00	8.47	Average
2484.000	28.01	6.18	33.11	41.88	42.96	54.00	11.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

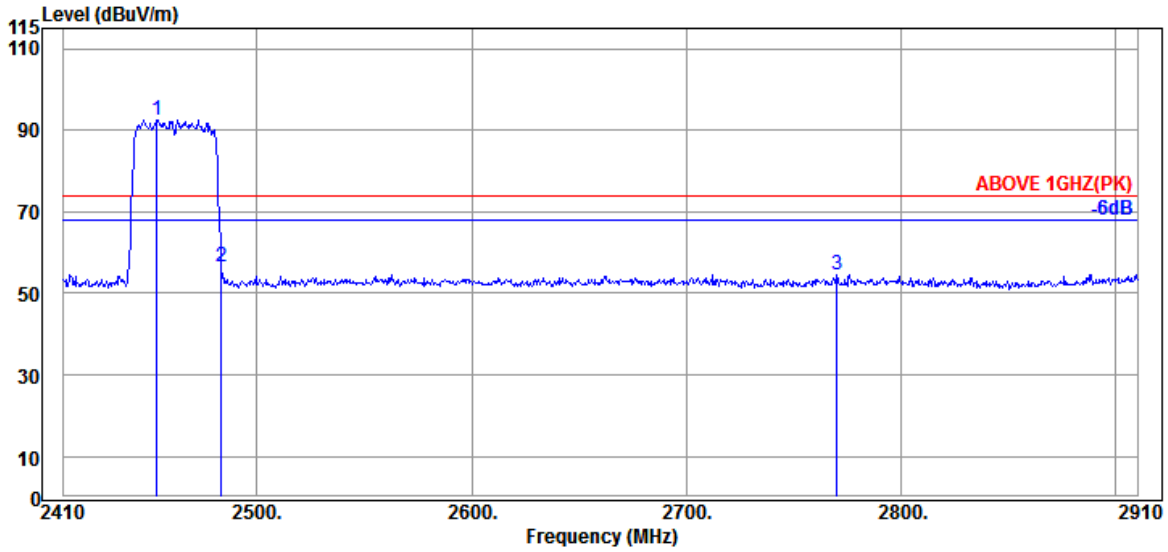

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	27.84	6.15	33.14	91.80	92.65	---	---	Peak
2483.500	28.01	6.18	33.11	55.27	56.35	74.00	17.65	Peak
2770.000	28.87	6.56	32.90	51.89	54.42	74.00	19.58	Peak

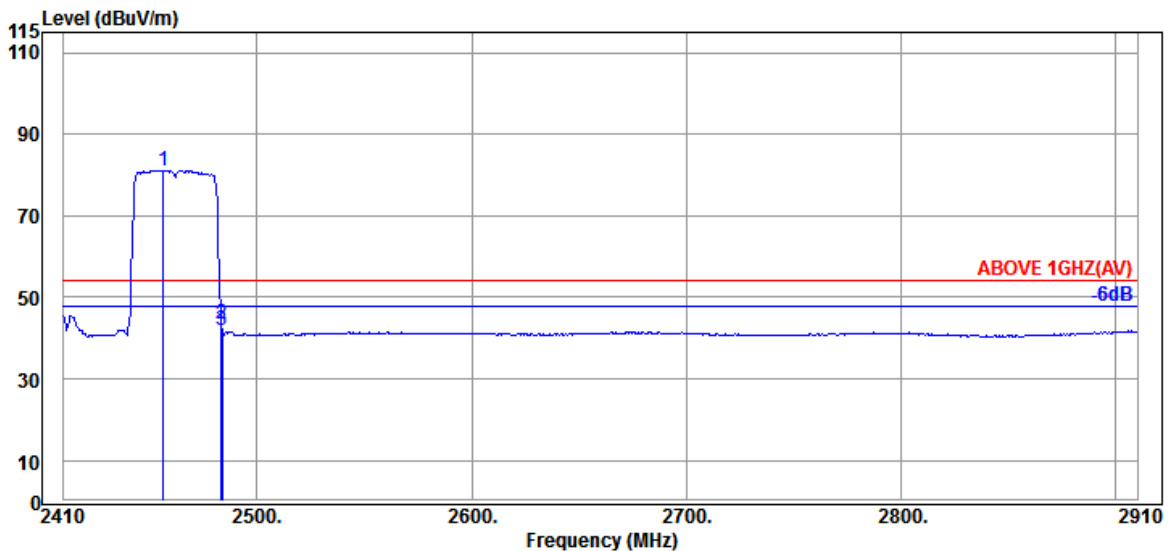


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	27.84	6.15	33.14	80.33	81.18	---	---	Average
2483.500	28.01	6.18	33.11	42.31	43.39	54.00	10.61	Average
2484.000	28.01	6.18	33.11	40.71	41.79	54.00	12.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

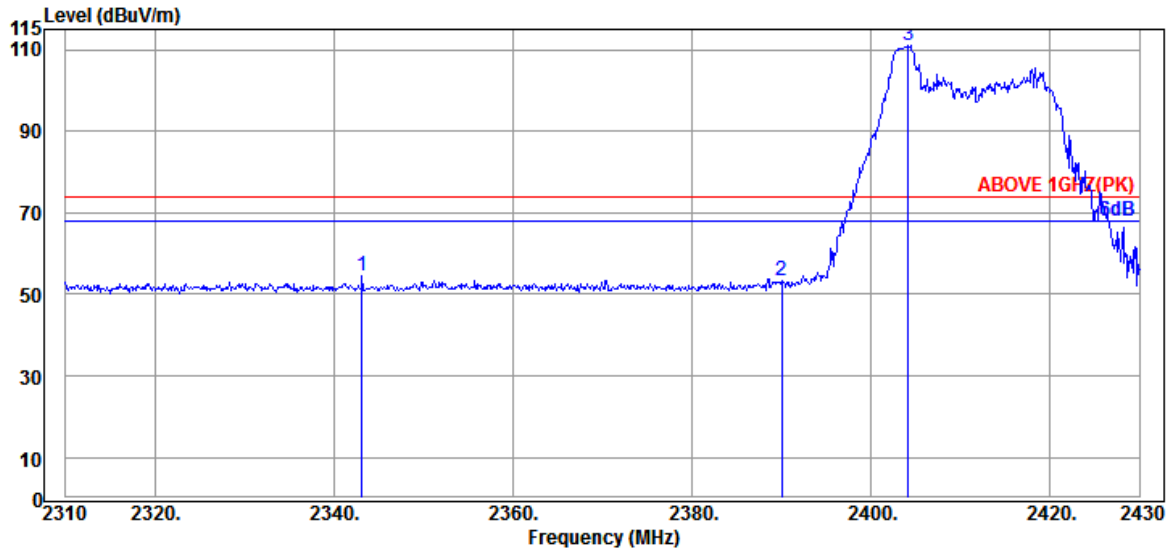

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2343.120	27.50	5.96	33.23	54.43	54.66	74.00	19.34	Peak
2390.040	27.57	6.04	33.19	52.75	53.17	74.00	20.83	Peak
@ 2404.200	27.60	6.07	33.18	110.53	111.02	---	---	Peak

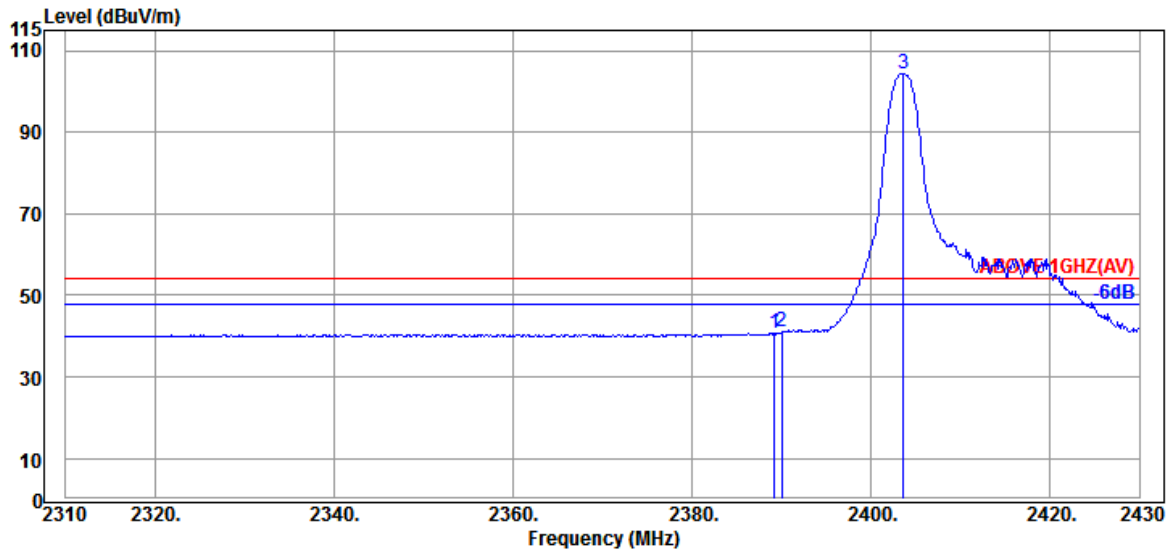


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	40.36	40.78	54.00	13.22	Average
2390.040	27.57	6.04	33.19	40.53	40.95	54.00	13.05	Average
@ 2403.600	27.60	6.07	33.18	103.91	104.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

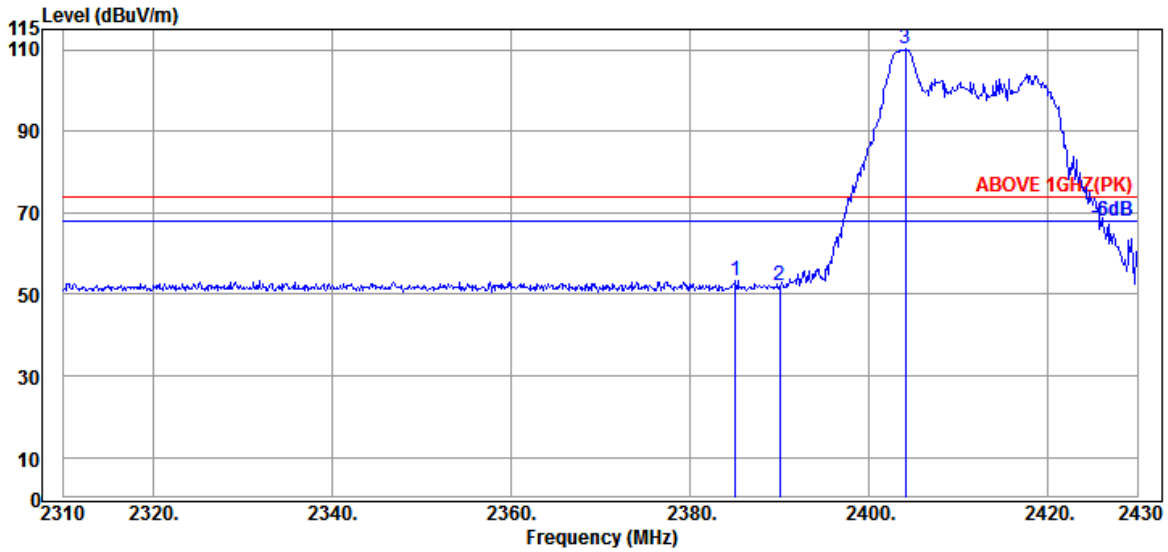

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.120	27.57	6.01	33.20	53.06	53.44	74.00	20.56	Peak
2390.040	27.57	6.04	33.19	51.92	52.34	74.00	21.66	Peak
@ 2404.080	27.60	6.07	33.18	109.91	110.40	---	---	Peak

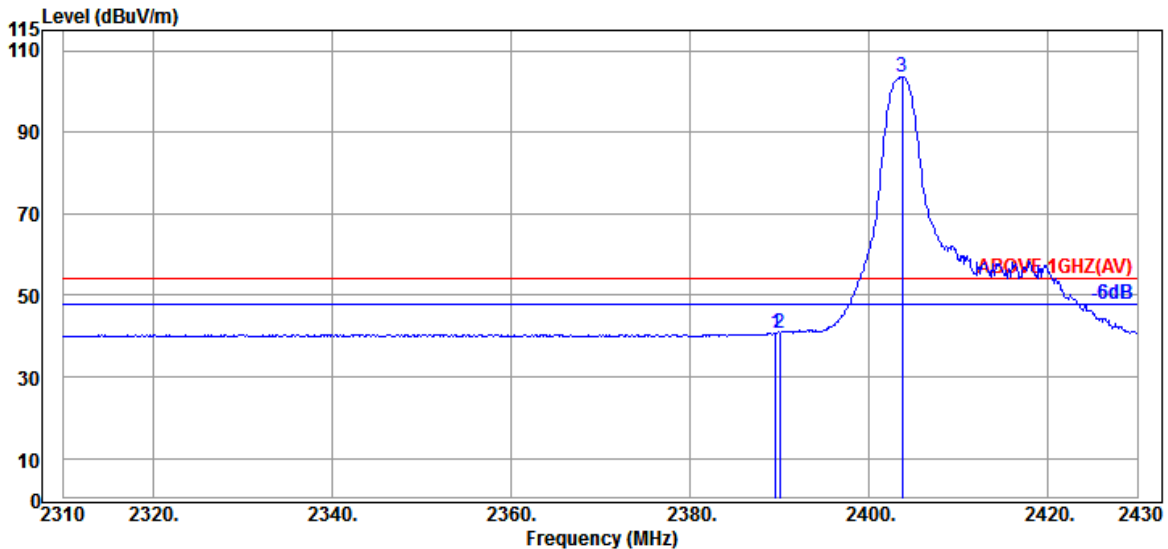


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	40.38	40.80	54.00	13.20	Average
2390.040	27.57	6.04	33.19	40.35	40.77	54.00	13.23	Average
@ 2403.720	27.60	6.07	33.18	103.11	103.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

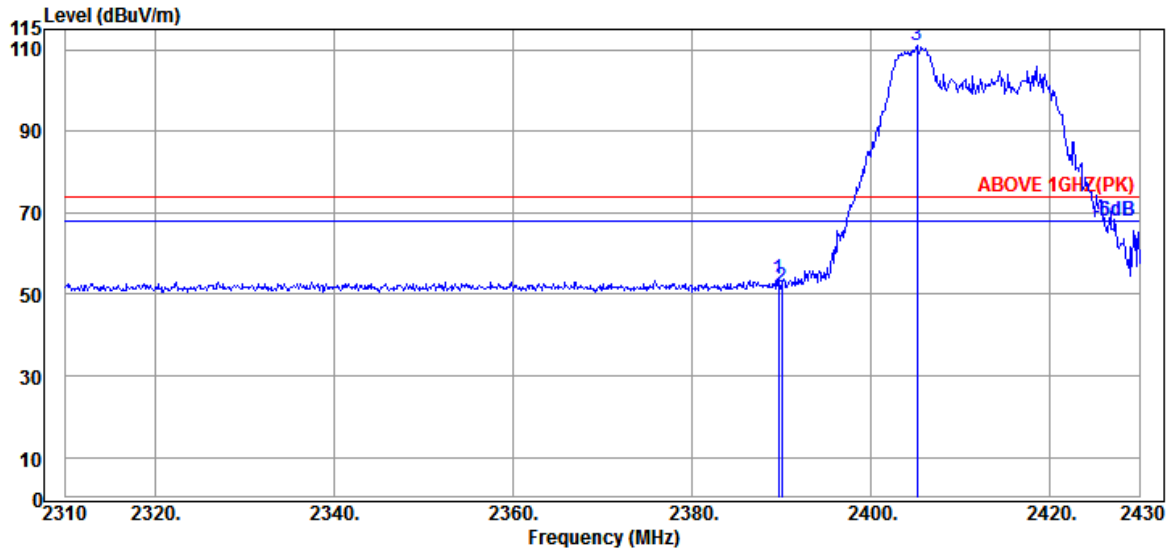

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	53.33	53.75	74.00	20.25	Peak
2390.040	27.57	6.04	33.19	51.52	51.94	74.00	22.06	Peak
@ 2405.160	27.63	6.07	33.18	110.70	111.22	---	---	Peak

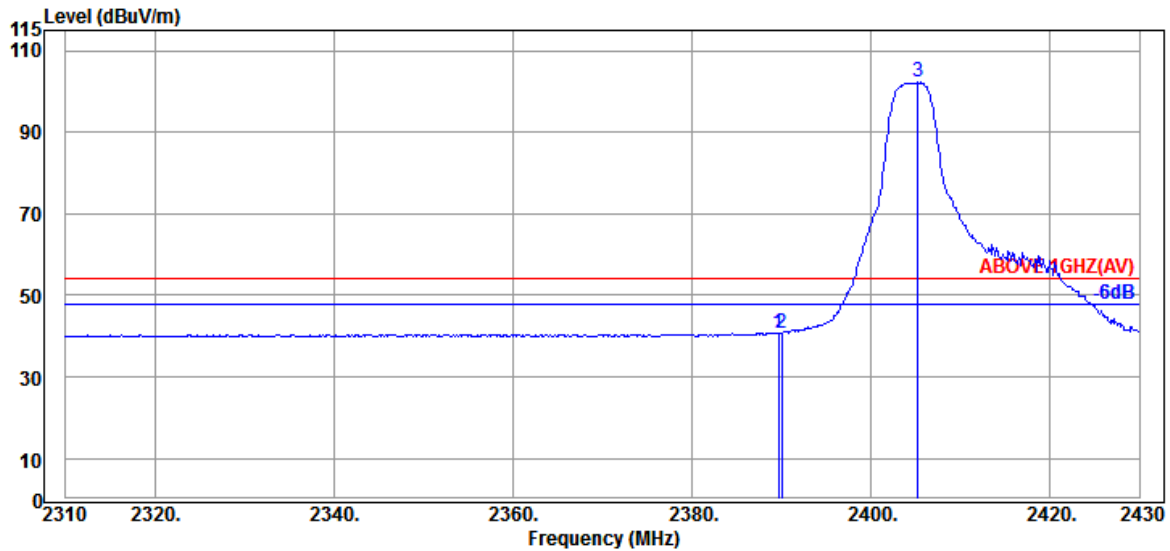


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	40.42	40.84	54.00	13.16	Average
2390.040	27.57	6.04	33.19	40.25	40.67	54.00	13.33	Average
@ 2405.280	27.63	6.07	33.18	101.65	102.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

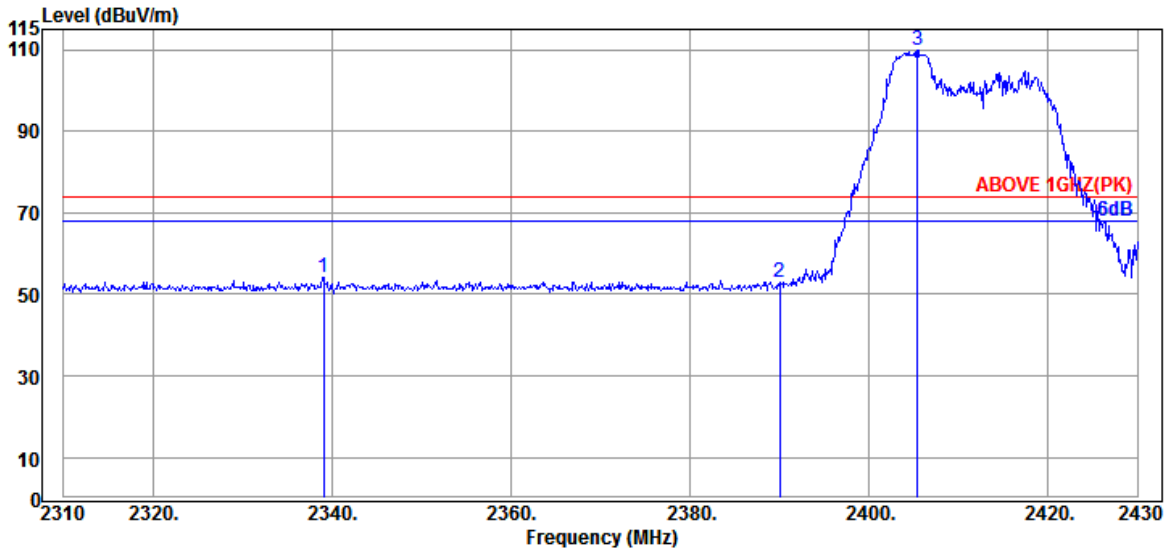

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2339.040	27.50	5.96	33.24	53.84	54.06	74.00	19.94	Peak
2390.040	27.57	6.04	33.19	52.44	52.86	74.00	21.14	Peak
@ 2405.400	27.63	6.07	33.18	109.51	110.03	---	---	Peak

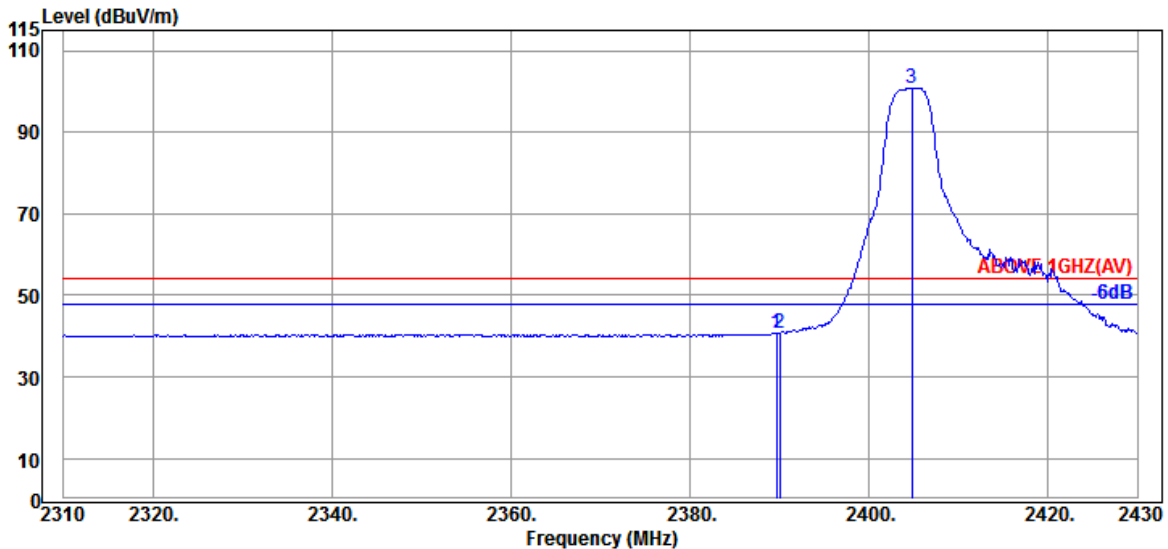


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	40.42	40.84	54.00	13.16	Average
2390.040	27.57	6.04	33.19	40.31	40.73	54.00	13.27	Average
@ 2404.800	27.63	6.07	33.18	100.39	100.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

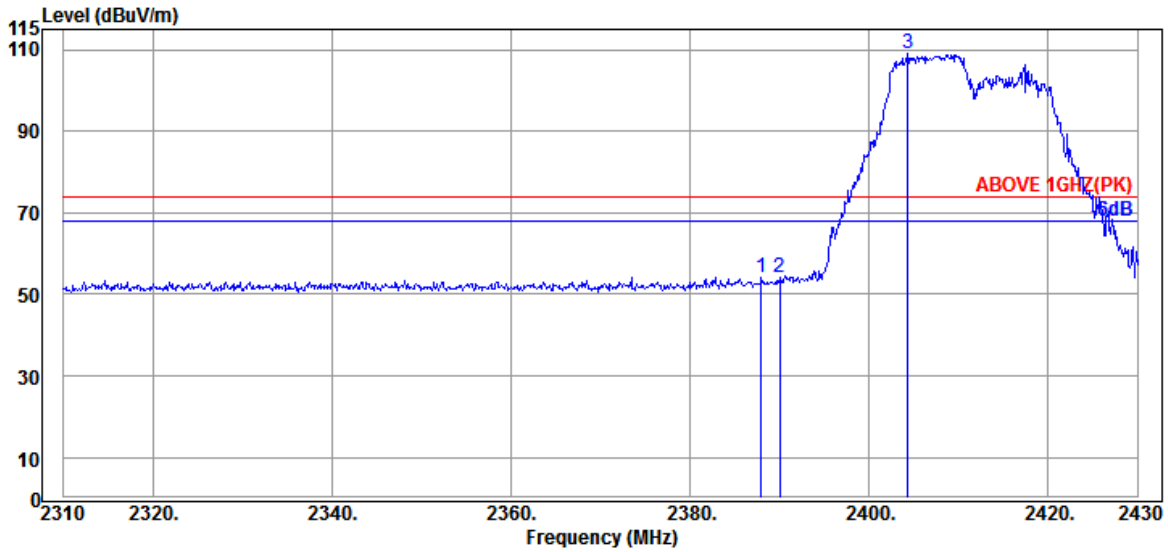

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	27.57	6.04	33.19	53.57	53.99	74.00	20.01	Peak
2390.040	27.57	6.04	33.19	53.58	54.00	74.00	20.00	Peak
@ 2404.320	27.63	6.07	33.18	108.47	108.99	---	---	Peak

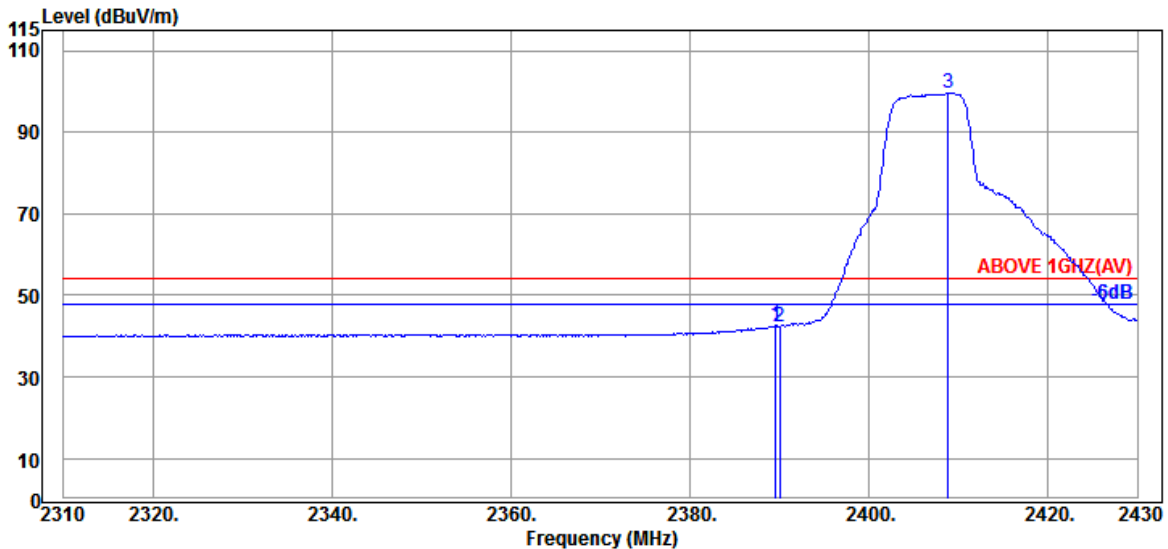


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	42.23	42.65	54.00	11.35	Average
2390.040	27.57	6.04	33.19	42.05	42.47	54.00	11.53	Average
@ 2408.880	27.63	6.07	33.18	99.23	99.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

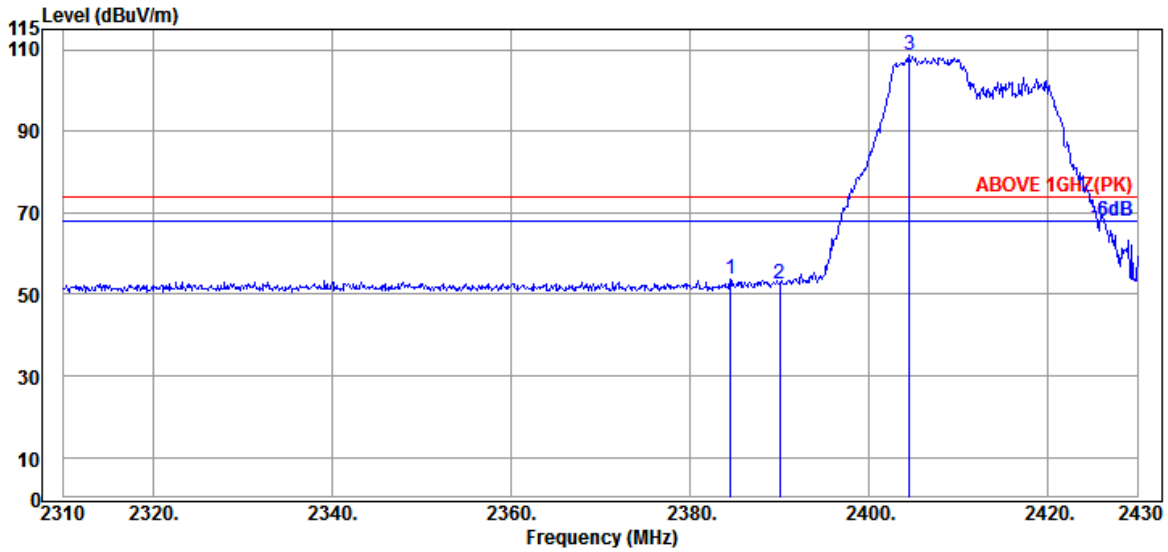

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.520	27.57	6.01	33.20	53.19	53.57	74.00	20.43	Peak
2390.040	27.57	6.04	33.19	52.06	52.48	74.00	21.52	Peak
@ 2404.560	27.63	6.07	33.18	107.98	108.50	---	---	Peak

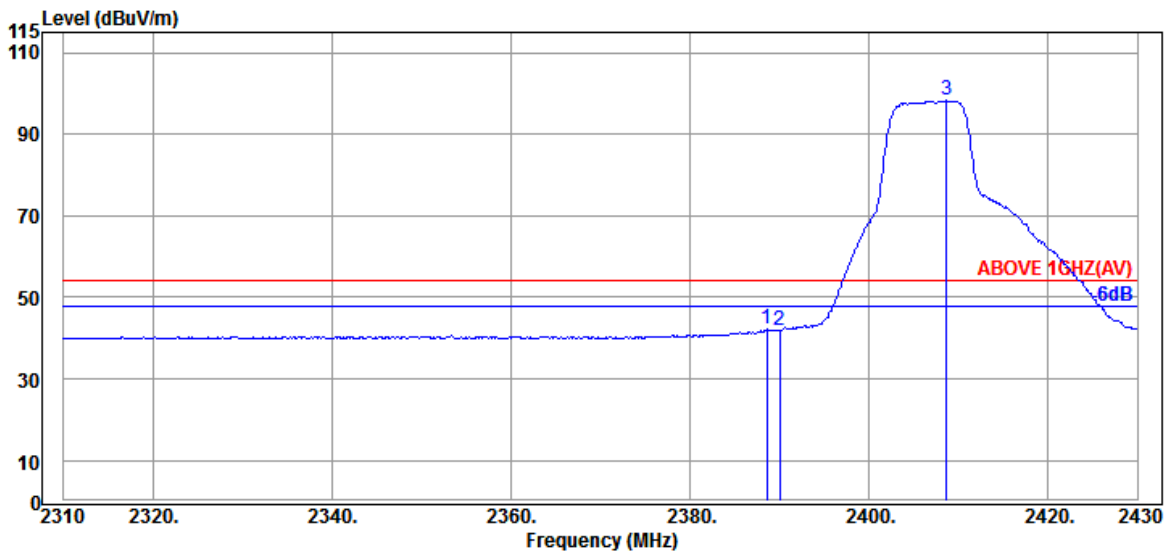


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	27.57	6.04	33.19	41.70	42.12	54.00	11.88	Average
2390.040	27.57	6.04	33.19	41.46	41.88	54.00	12.12	Average
@ 2408.640	27.63	6.07	33.18	97.69	98.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

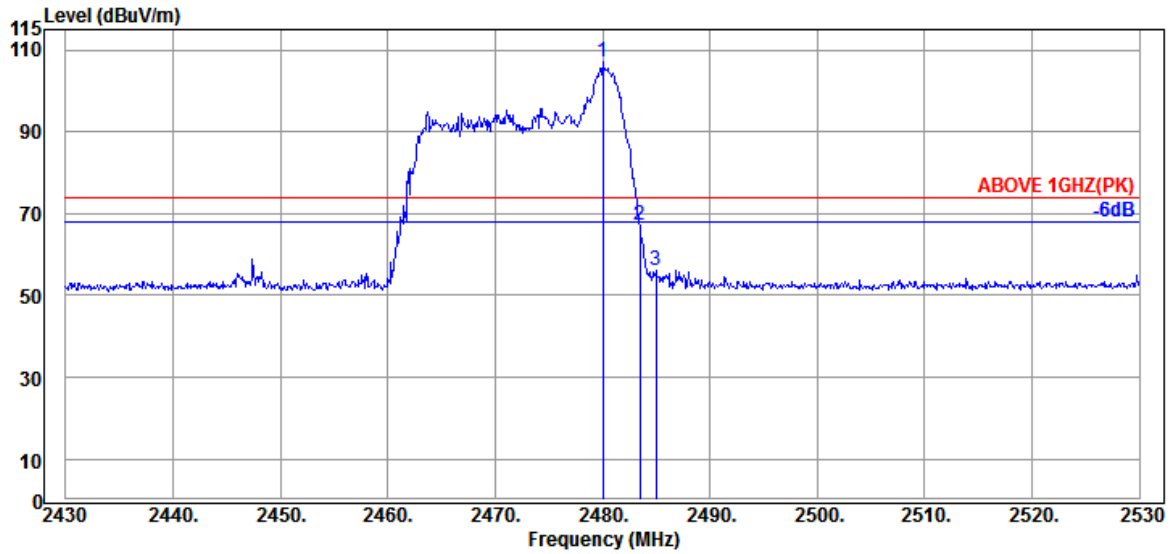

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	27.97	6.18	33.12	105.90	106.93	---	---	Peak
	2483.500	28.01	6.18	33.11	66.03	67.11	74.00	6.89	Peak
	2485.000	28.01	6.18	33.11	55.00	56.08	74.00	17.92	Peak

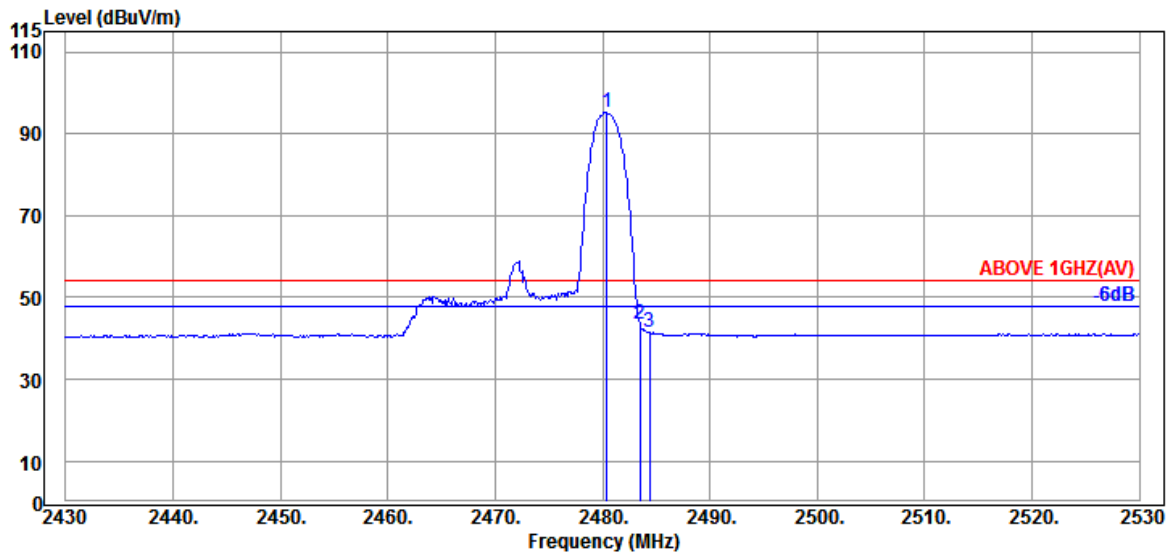


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.400	27.97	6.18	33.12	94.33	95.36	---	---	Average
	2483.500	28.01	6.18	33.11	42.51	43.59	54.00	10.41	Average
	2484.400	28.01	6.18	33.11	40.27	41.35	54.00	12.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

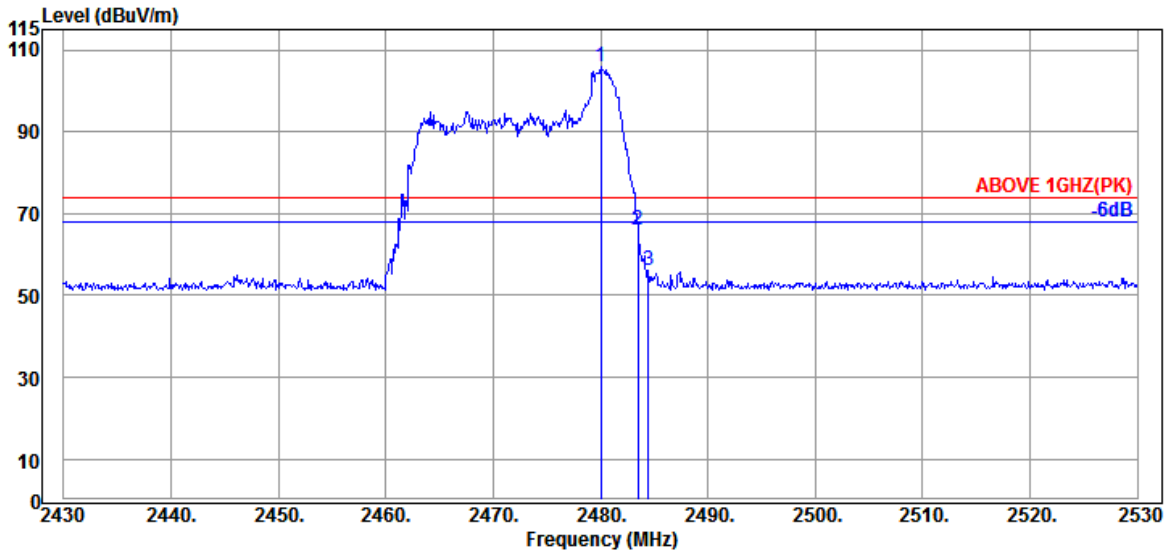

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	27.97	6.18	33.12	104.76	105.79	---	---	Peak
2483.500	28.01	6.18	33.11	65.10	66.18	74.00	7.82	Peak
2484.500	28.01	6.18	33.11	55.09	56.17	74.00	17.83	Peak

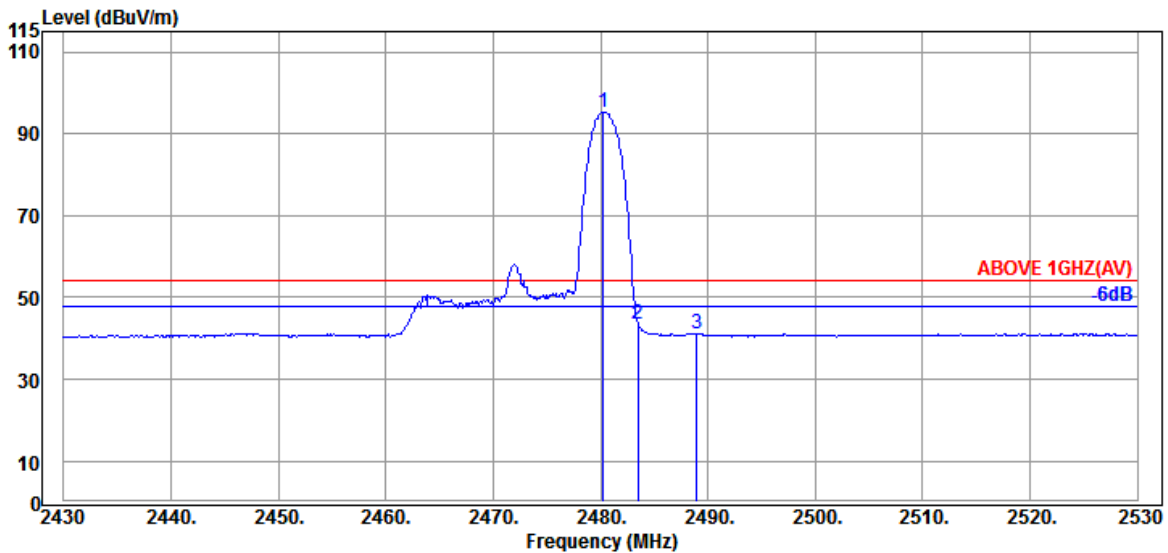


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	27.97	6.18	33.12	94.24	95.27	---	---	Average
2483.500	28.01	6.18	33.11	42.31	43.39	54.00	10.61	Average
2489.000	28.01	6.21	33.11	40.10	41.21	54.00	12.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

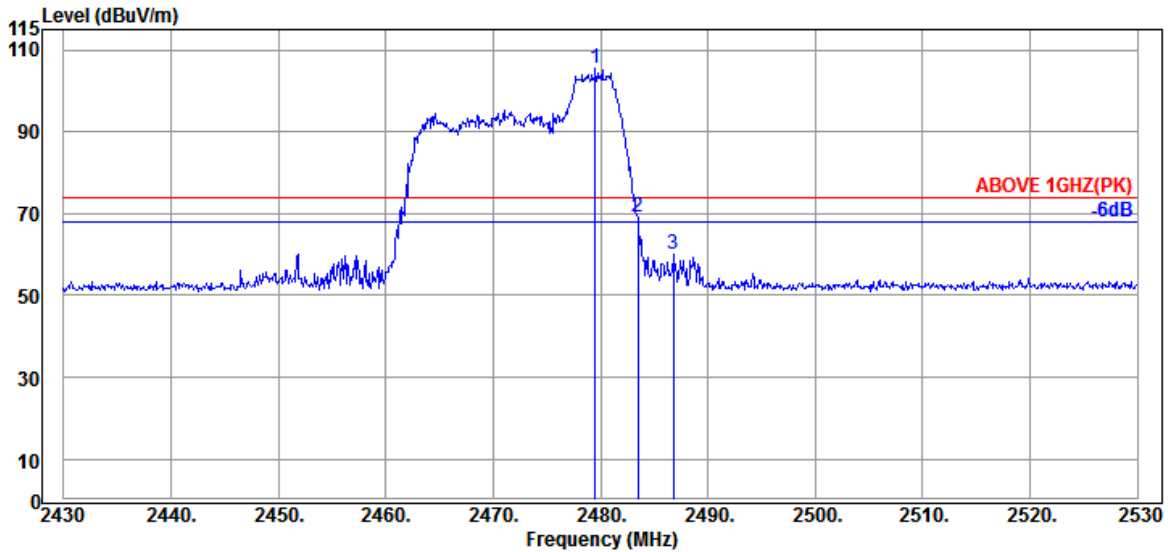

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	27.97	6.18	33.12	104.39	105.42	---	---	Peak
2483.500	28.01	6.18	33.11	68.19	69.27	74.00	4.73	Peak
2486.800	28.01	6.18	33.11	59.04	60.12	74.00	13.88	Peak

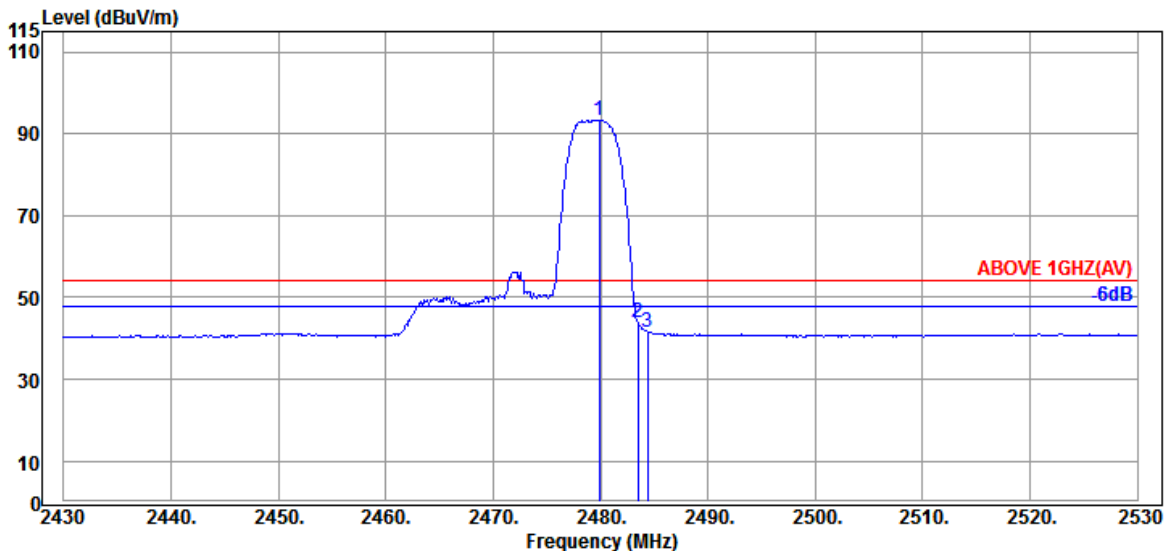


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	27.97	6.18	33.12	92.26	93.29	---	---	Average
2483.500	28.01	6.18	33.11	42.61	43.69	54.00	10.31	Average
2484.400	28.01	6.18	33.11	40.59	41.67	54.00	12.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

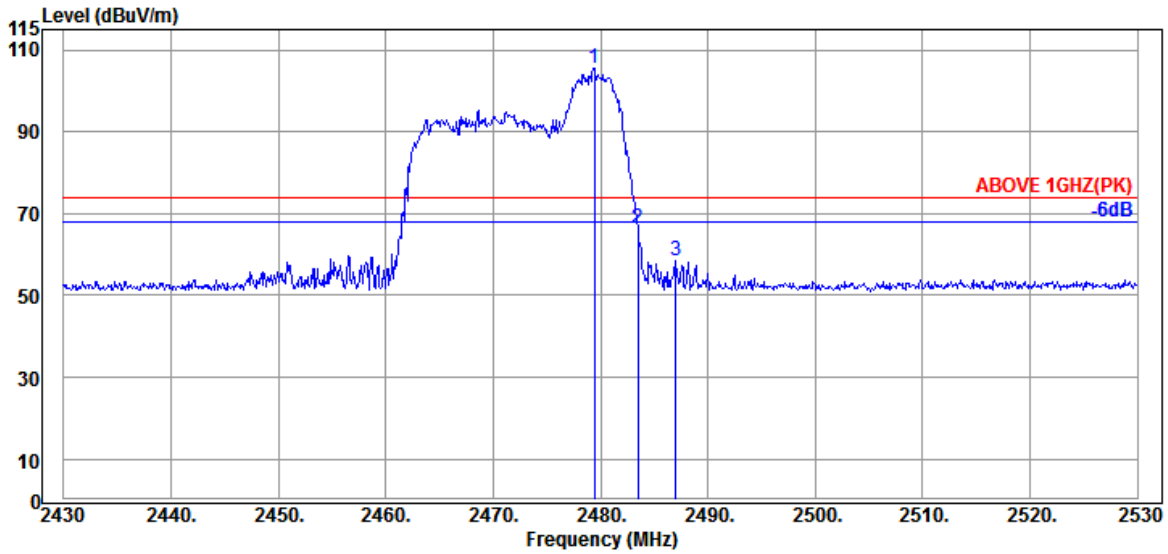

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	27.97	6.18	33.12	104.65	105.68	---	---	Peak
2483.500	28.01	6.18	33.11	65.25	66.33	74.00	7.67	Peak
2487.000	28.01	6.18	33.11	57.48	58.56	74.00	15.44	Peak

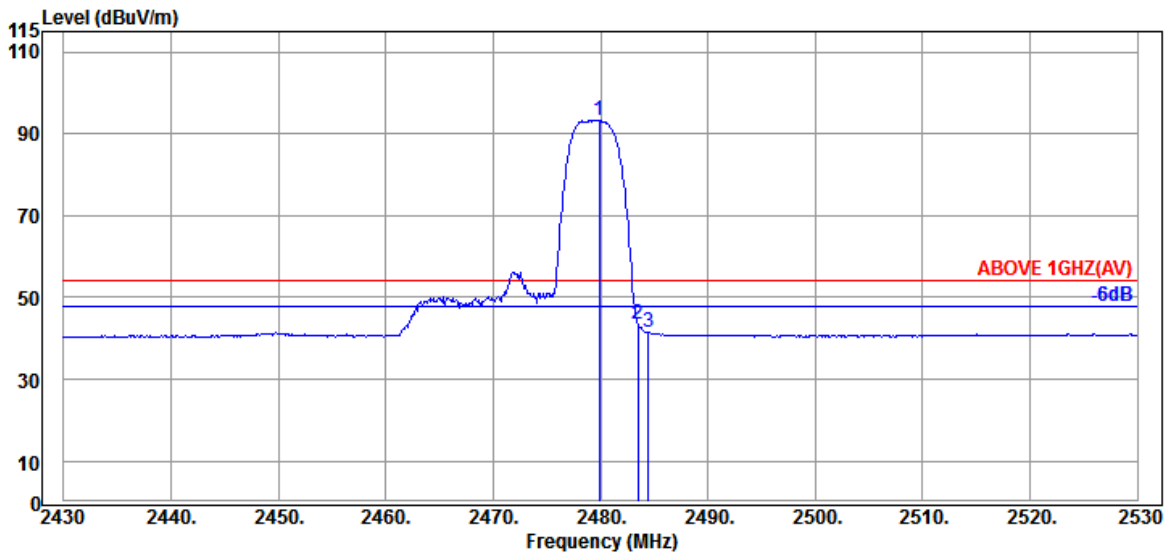


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	27.97	6.18	33.12	92.19	93.22	---	---	Average
2483.500	28.01	6.18	33.11	42.53	43.61	54.00	10.39	Average
2484.500	28.01	6.18	33.11	40.50	41.58	54.00	12.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

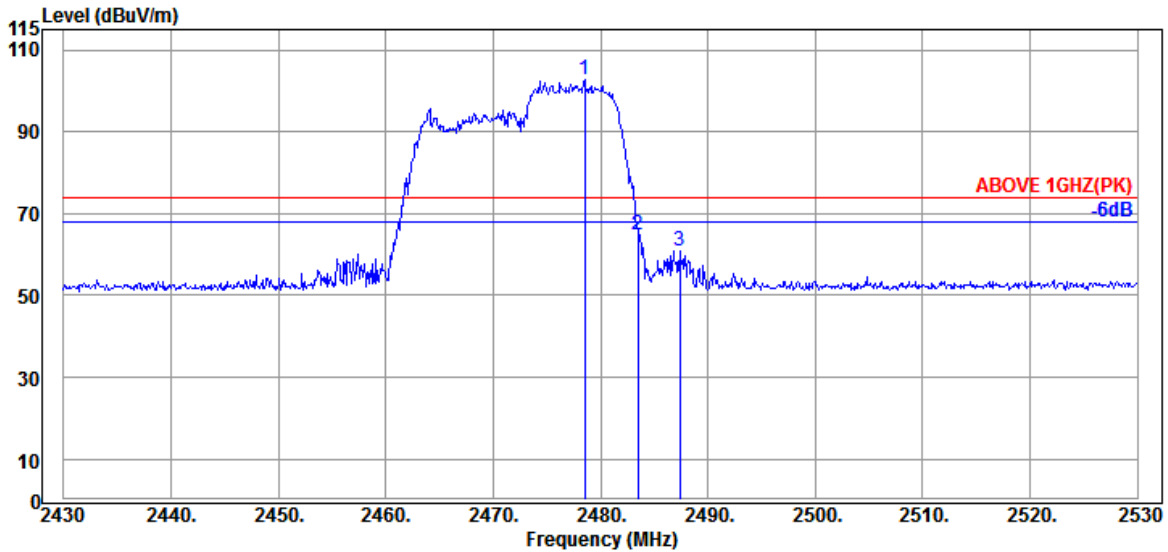

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	27.97	6.18	33.12	101.55	102.58	---	---	Peak
2483.500	28.01	6.18	33.11	63.74	64.82	74.00	9.18	Peak
2487.400	28.01	6.18	33.11	59.77	60.85	74.00	13.15	Peak

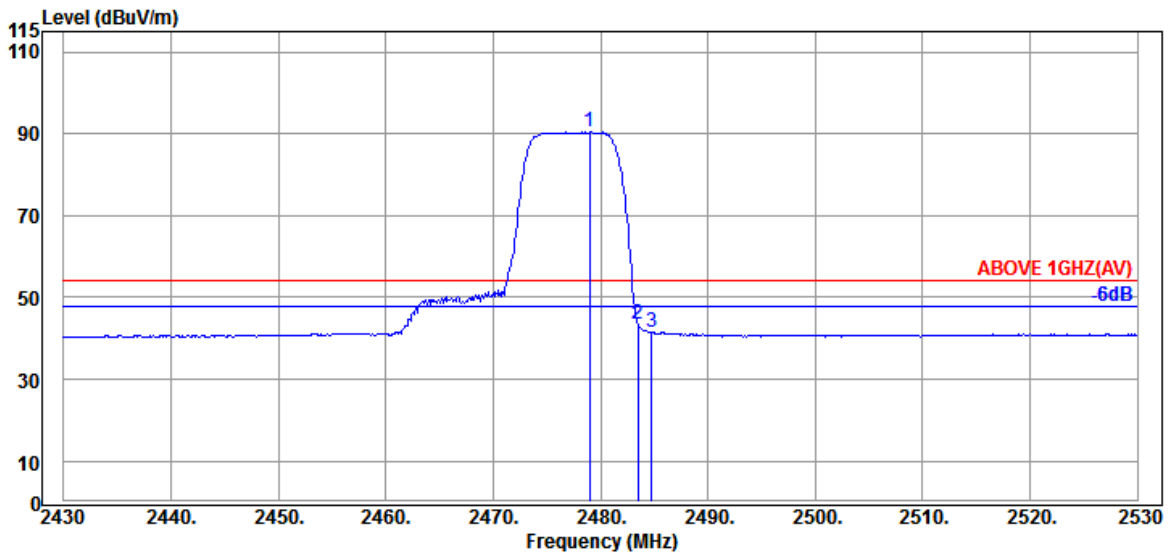


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	27.97	6.18	33.12	89.40	90.43	---	---	Average
2483.500	28.01	6.18	33.11	42.40	43.48	54.00	10.52	Average
2484.800	28.01	6.18	33.11	40.55	41.63	54.00	12.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

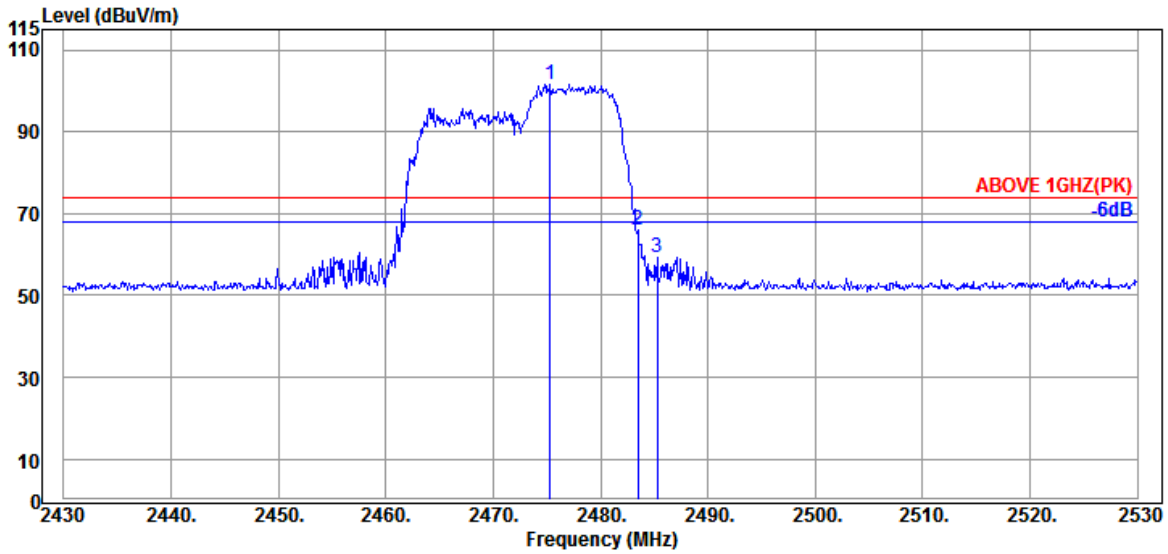

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.300	27.97	6.18	33.12	100.62	101.65	---	---	Peak
2483.500	28.01	6.18	33.11	64.84	65.92	74.00	8.08	Peak
2485.300	28.01	6.18	33.11	58.37	59.45	74.00	14.55	Peak

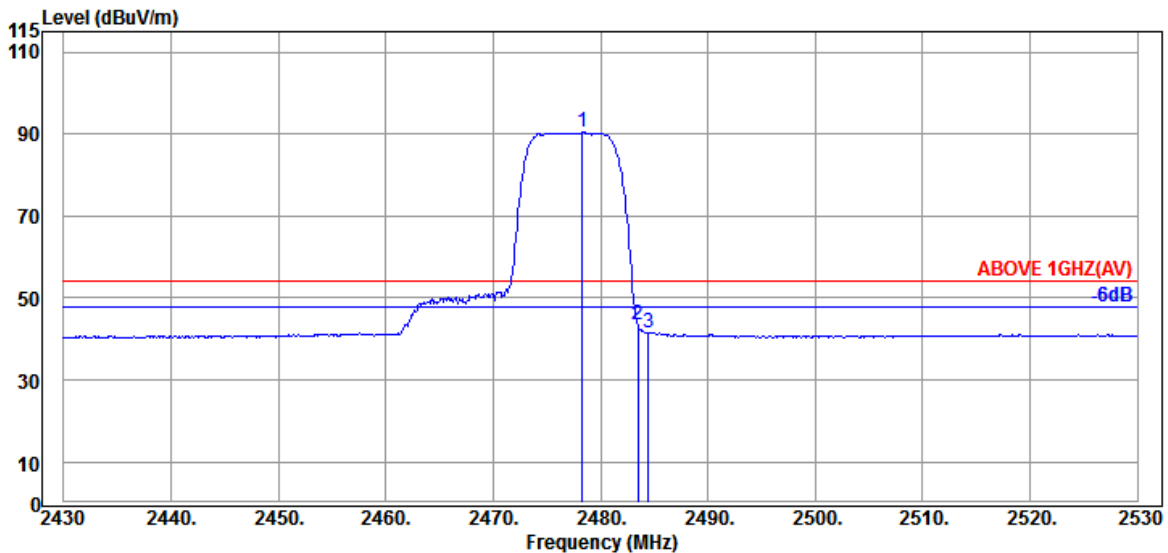


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	27.97	6.18	33.12	89.36	90.39	---	---	Average
2483.500	28.01	6.18	33.11	42.47	43.55	54.00	10.45	Average
2484.500	28.01	6.18	33.11	40.57	41.65	54.00	12.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

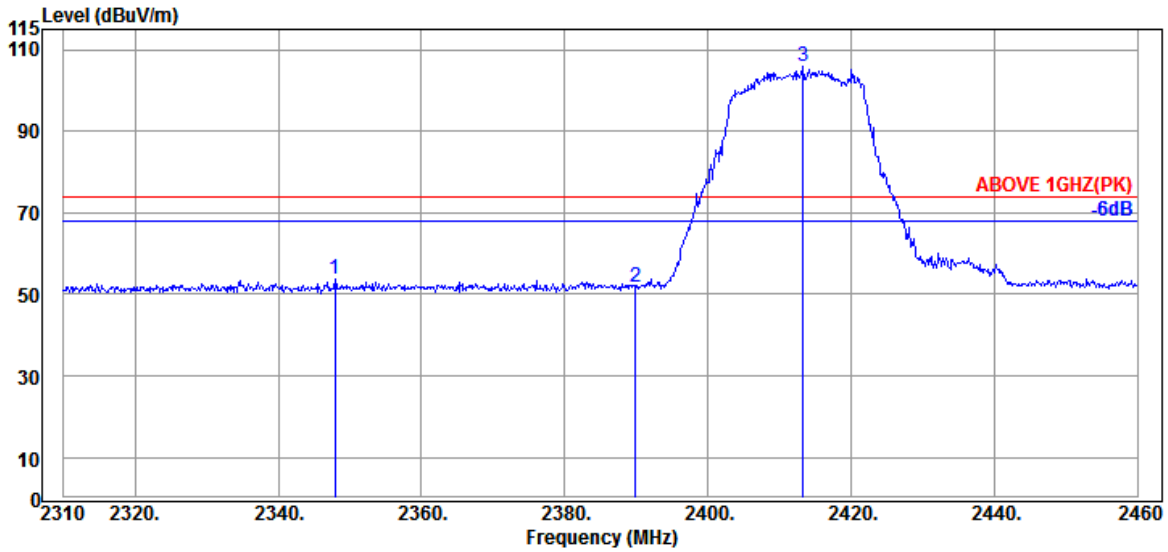

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.950	27.50	5.96	33.23	53.66	53.89	74.00	20.11	Peak
2389.950	27.57	6.04	33.19	51.49	51.91	74.00	22.09	Peak
@ 2413.350	27.66	6.07	33.17	105.28	105.84	---	---	Peak

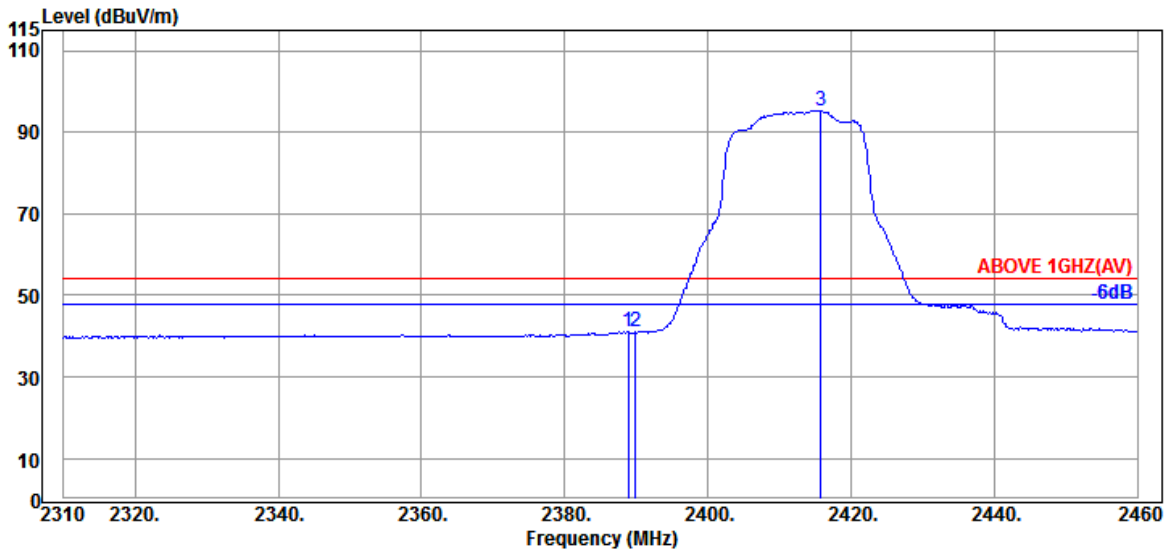


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	27.57	6.04	33.19	40.79	41.21	54.00	12.79	Average
2389.950	27.57	6.04	33.19	40.53	40.95	54.00	13.05	Average
@ 2415.750	27.66	6.07	33.17	94.87	95.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

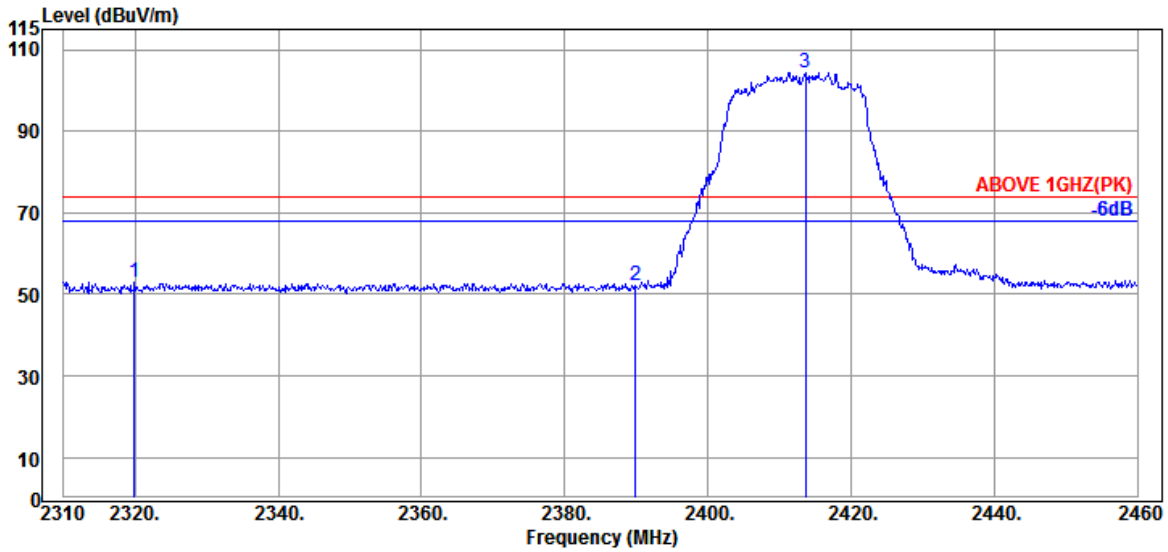

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2319.900	27.50	5.93	33.25	52.92	53.10	74.00	20.90	Peak
2389.950	27.57	6.04	33.19	51.63	52.05	74.00	21.95	Peak
@ 2413.650	27.66	6.07	33.17	103.77	104.33	---	---	Peak

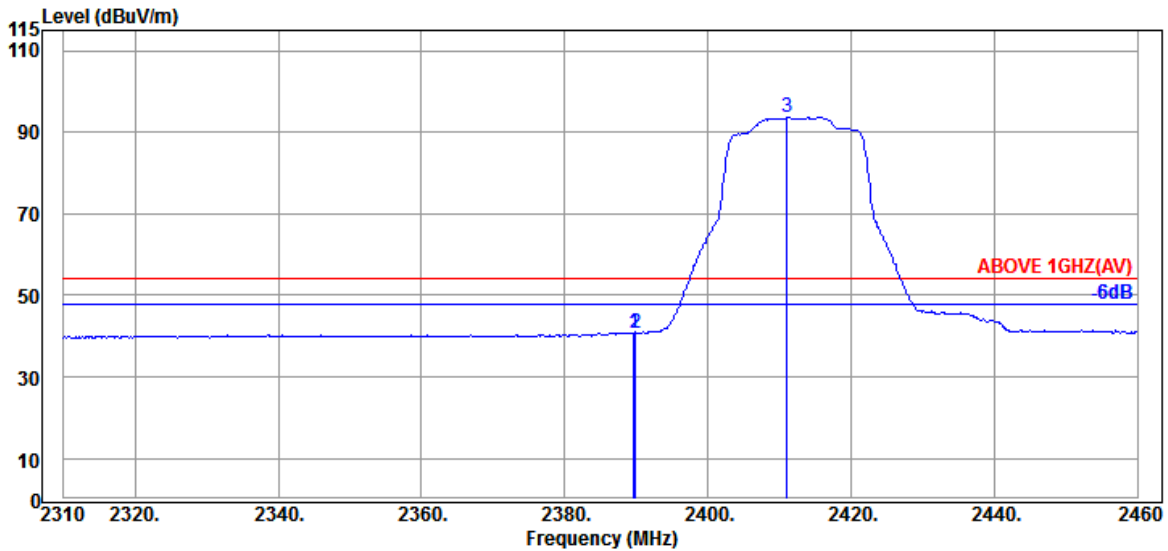


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	27.57	6.04	33.19	40.48	40.90	54.00	13.10	Average
2389.950	27.57	6.04	33.19	40.37	40.79	54.00	13.21	Average
@ 2411.100	27.63	6.07	33.17	93.17	93.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

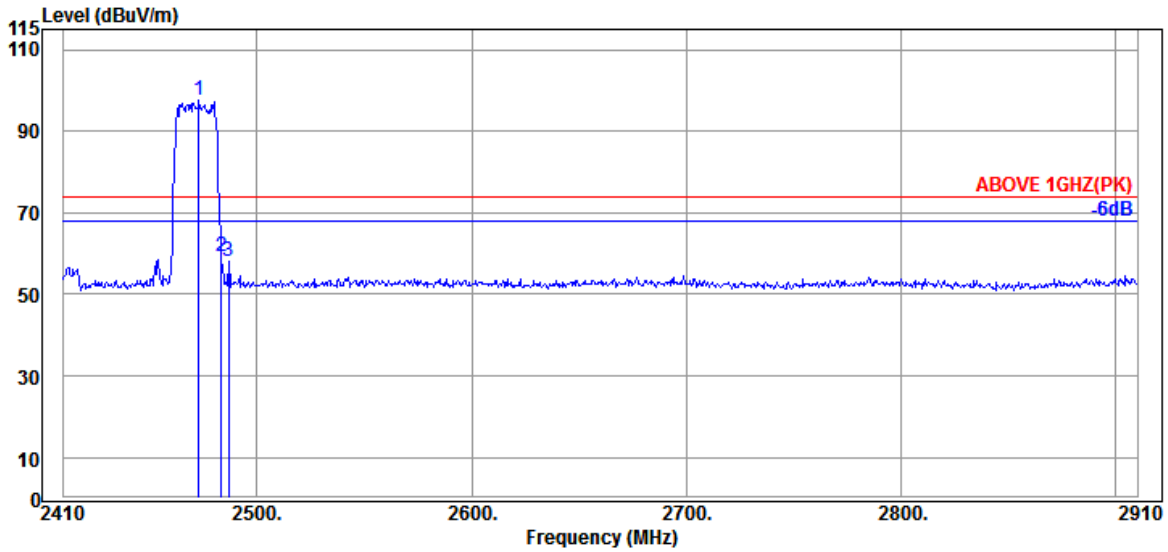

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.000	27.93	6.18	33.13	96.76	97.74	---	---	Peak
2483.500	28.01	6.18	33.11	58.20	59.28	74.00	14.72	Peak
2487.000	28.01	6.18	33.11	57.10	58.18	74.00	15.82	Peak

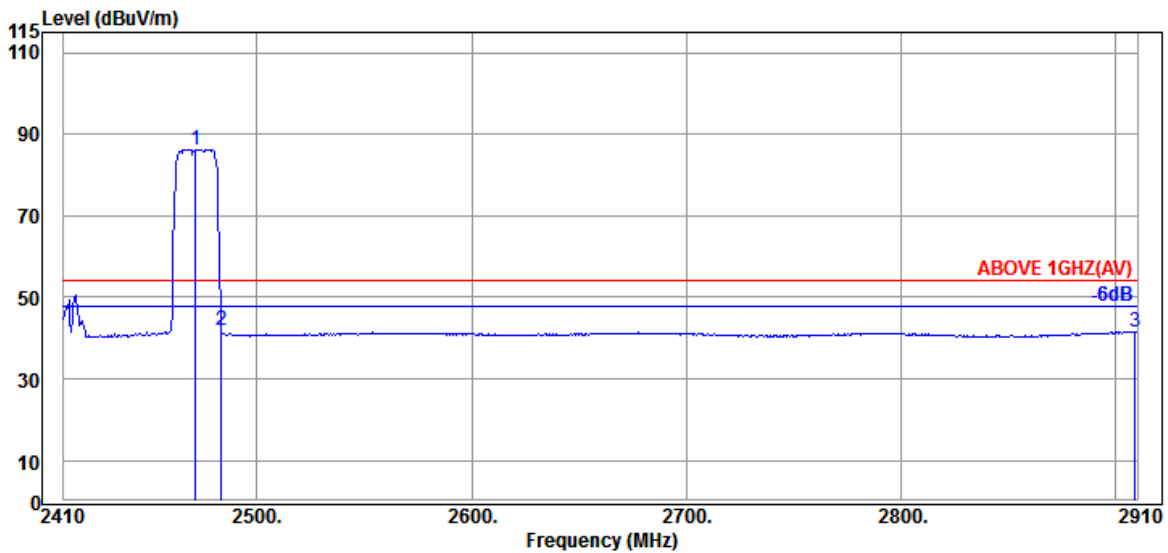


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	85.35	86.33	---	---	Average
2483.500	28.01	6.18	33.11	40.77	41.85	54.00	12.15	Average
2909.000	29.20	6.73	32.81	38.47	41.59	54.00	12.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

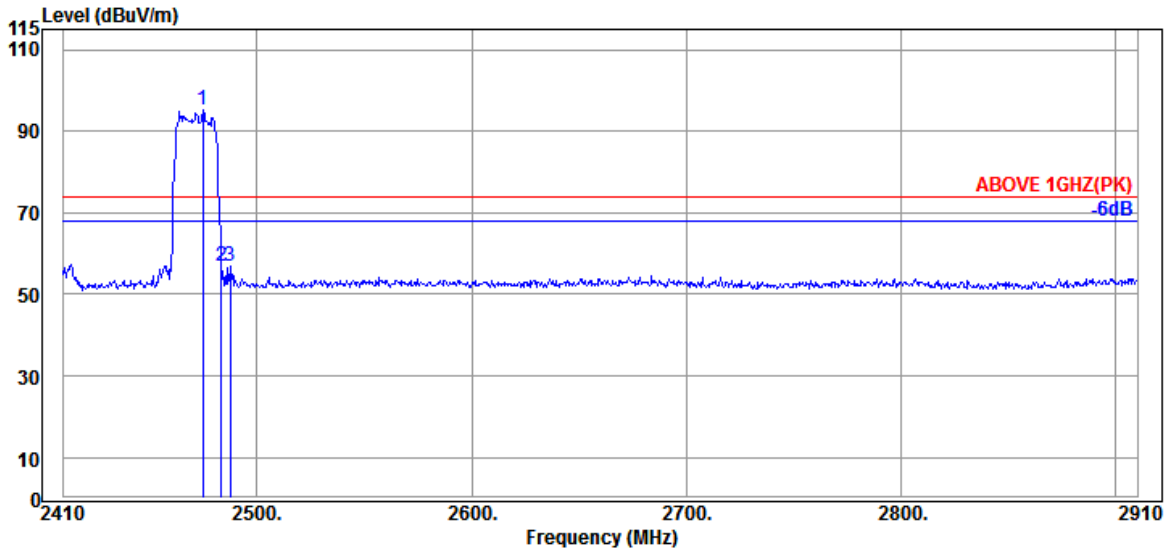

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	27.97	6.18	33.12	94.18	95.21	---	---	Peak
2483.500	28.01	6.18	33.11	55.97	57.05	74.00	16.95	Peak
2487.500	28.01	6.21	33.11	55.97	57.08	74.00	16.92	Peak

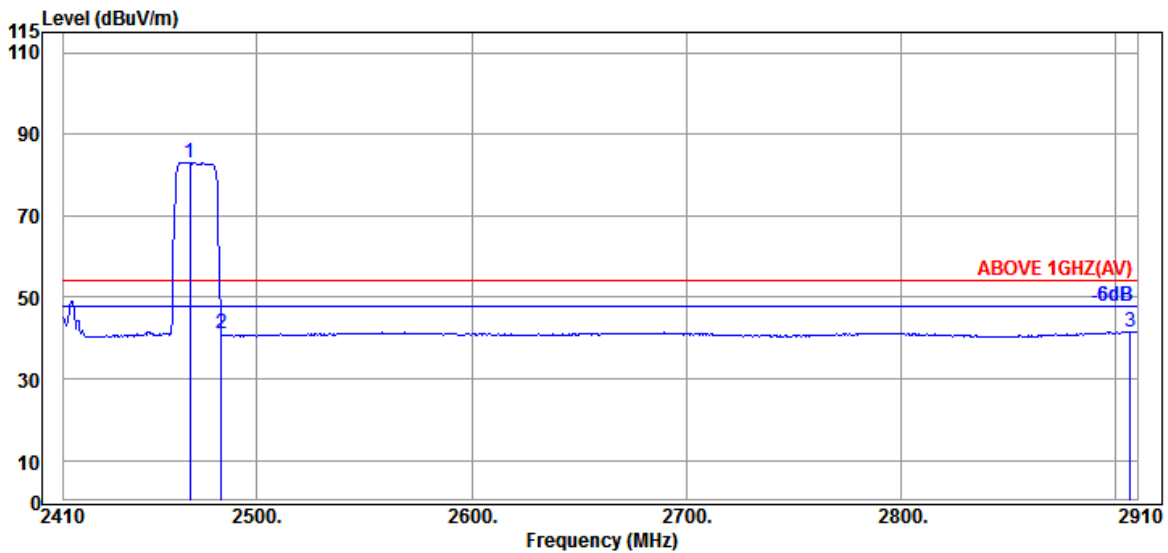


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	27.93	6.15	33.13	82.11	83.06	---	---	Average
2483.500	28.01	6.18	33.11	39.95	41.03	54.00	12.97	Average
2906.500	29.20	6.73	32.81	38.51	41.63	54.00	12.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

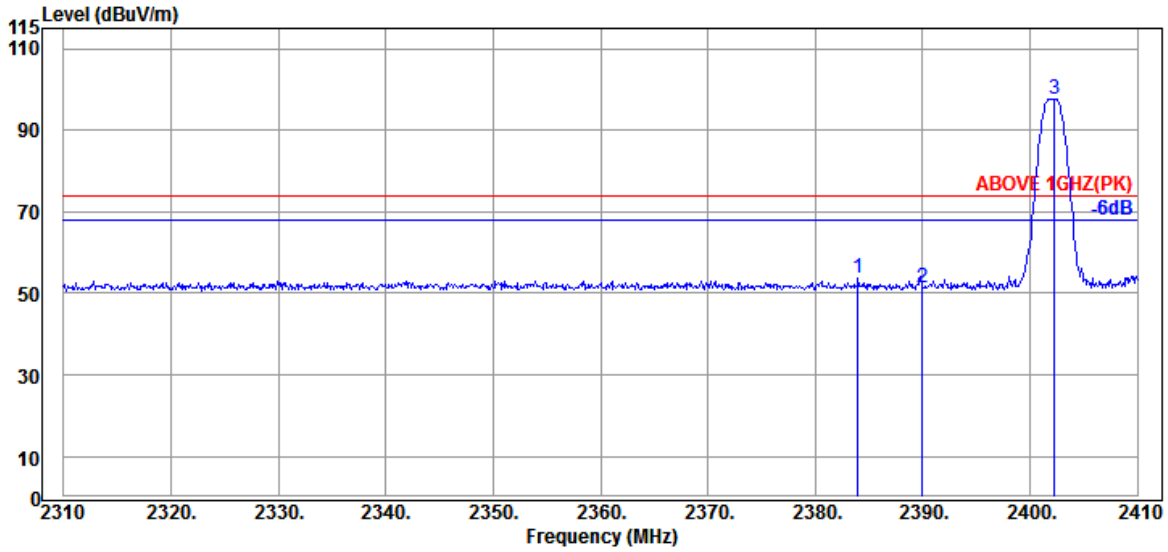

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.000	27.57	6.01	33.20	53.17	53.55	74.00	20.45	Peak
2390.000	27.57	6.04	33.19	50.86	51.28	74.00	22.72	Peak
@ 2402.300	27.60	6.04	33.19	97.31	97.76	---	---	Peak

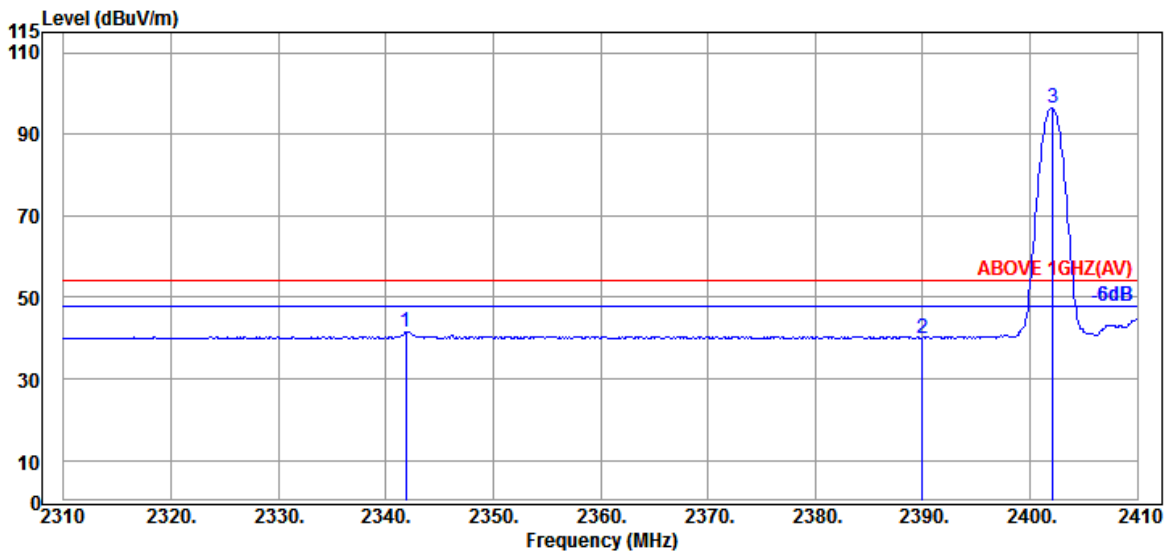


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	27.50	5.96	33.23	41.22	41.45	54.00	12.55	Average
2390.000	27.57	6.04	33.19	39.60	40.02	54.00	13.98	Average
@ 2402.100	27.60	6.04	33.19	95.97	96.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

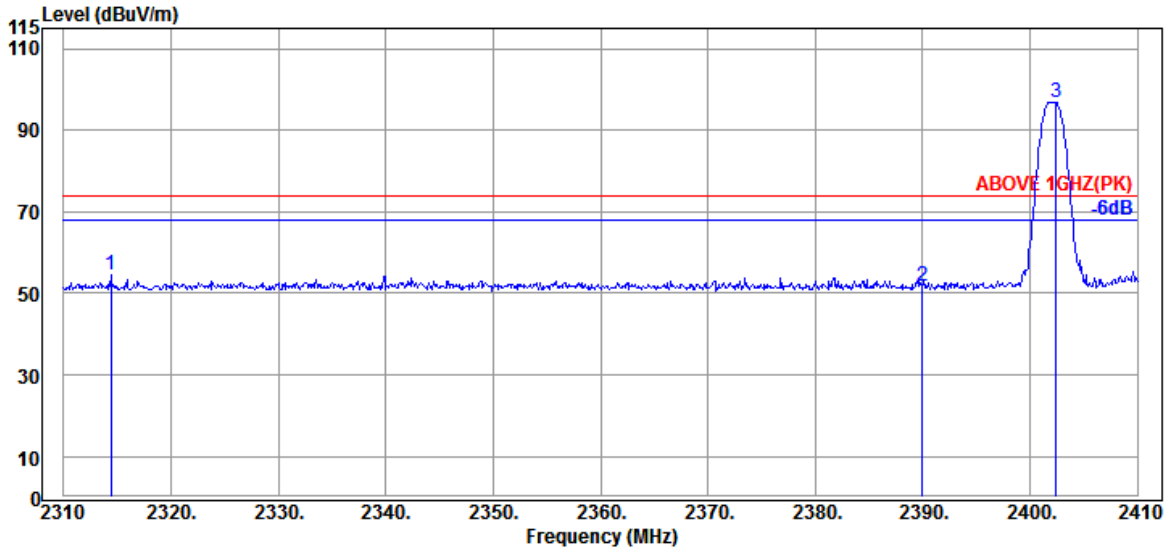

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2314.400	27.50	5.90	33.26	54.33	54.47	74.00	19.53	Peak
2390.000	27.57	6.04	33.19	51.39	51.81	74.00	22.19	Peak
@ 2402.400	27.60	6.04	33.19	96.33	96.78	---	---	Peak

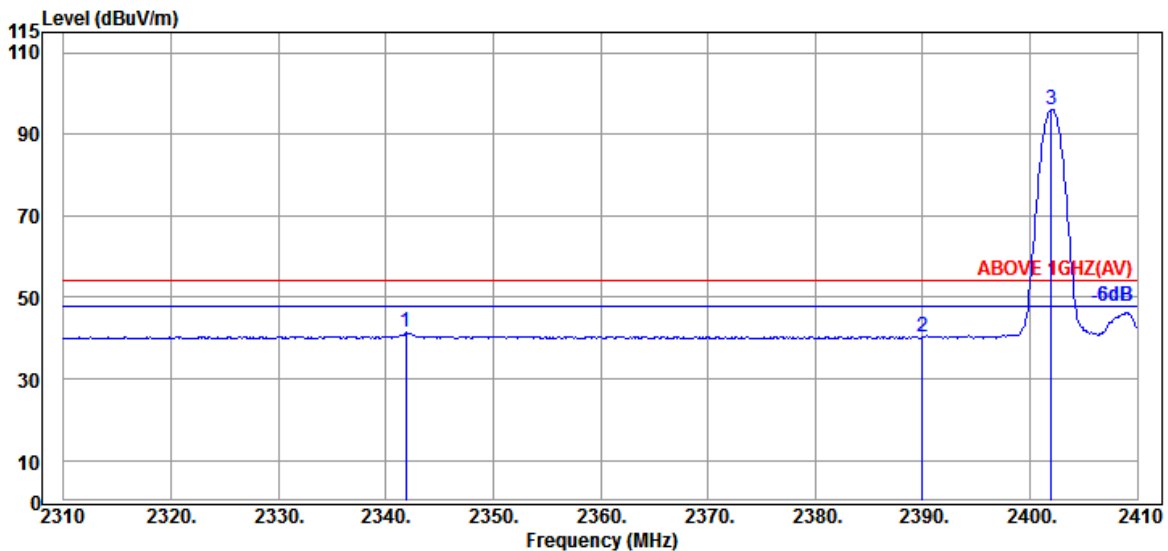


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	27.50	5.96	33.23	41.08	41.31	54.00	12.69	Average
2390.000	27.57	6.04	33.19	39.93	40.35	54.00	13.65	Average
@ 2402.000	27.60	6.04	33.19	95.74	96.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

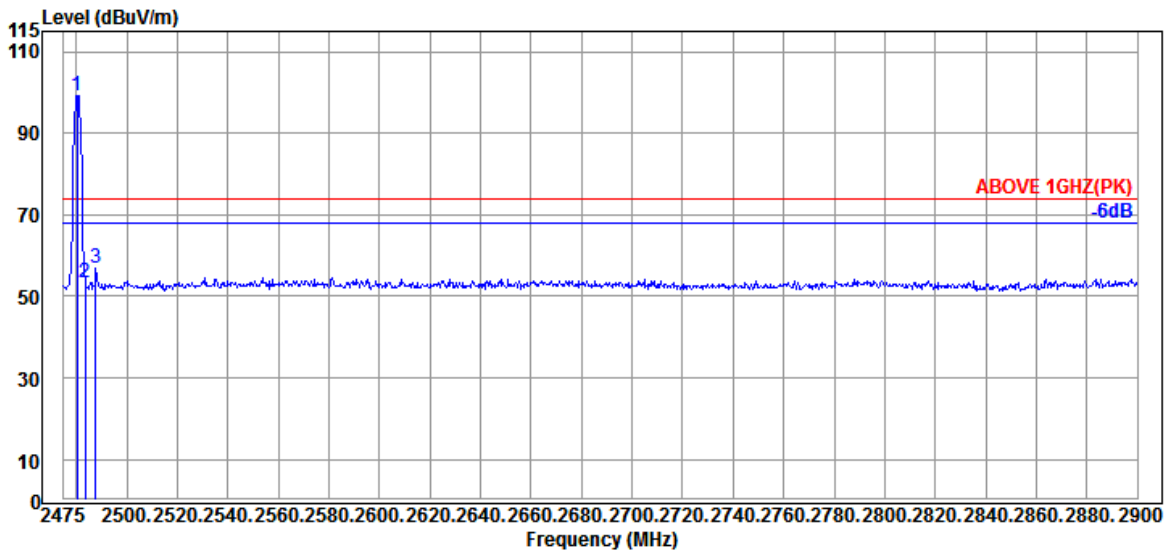

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.525	27.97	6.18	33.12	98.30	99.33	---	---	Peak
2483.500	28.01	6.18	33.11	52.10	53.18	74.00	20.82	Peak
2487.750	28.01	6.21	33.11	55.65	56.76	74.00	17.24	Peak

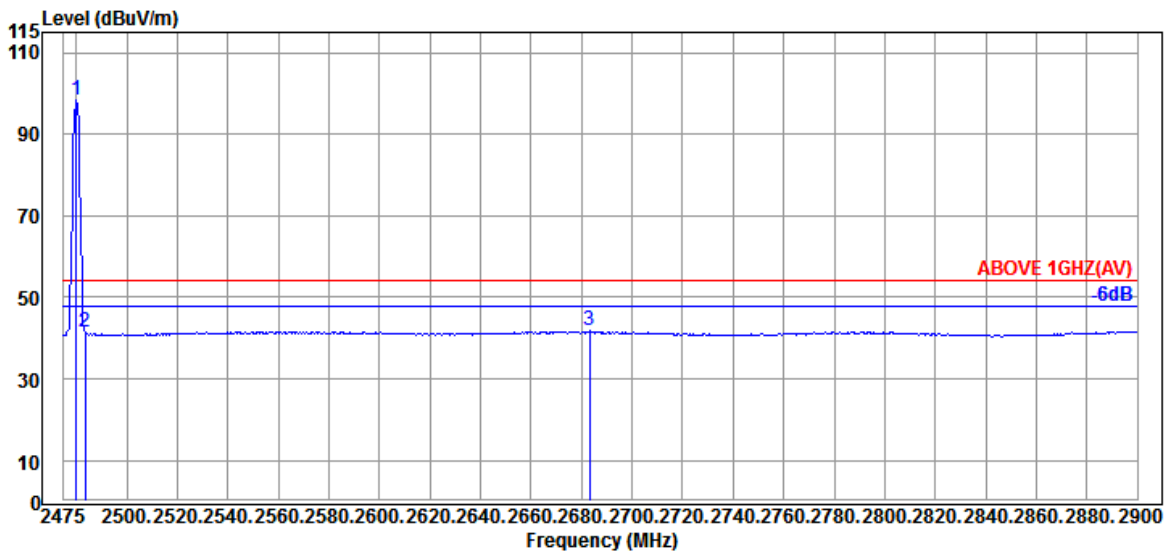


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	27.97	6.18	33.12	97.40	98.43	---	---	Average
2483.500	28.01	6.18	33.11	40.24	41.32	54.00	12.68	Average
2683.250	28.86	6.45	32.97	39.46	41.80	54.00	12.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

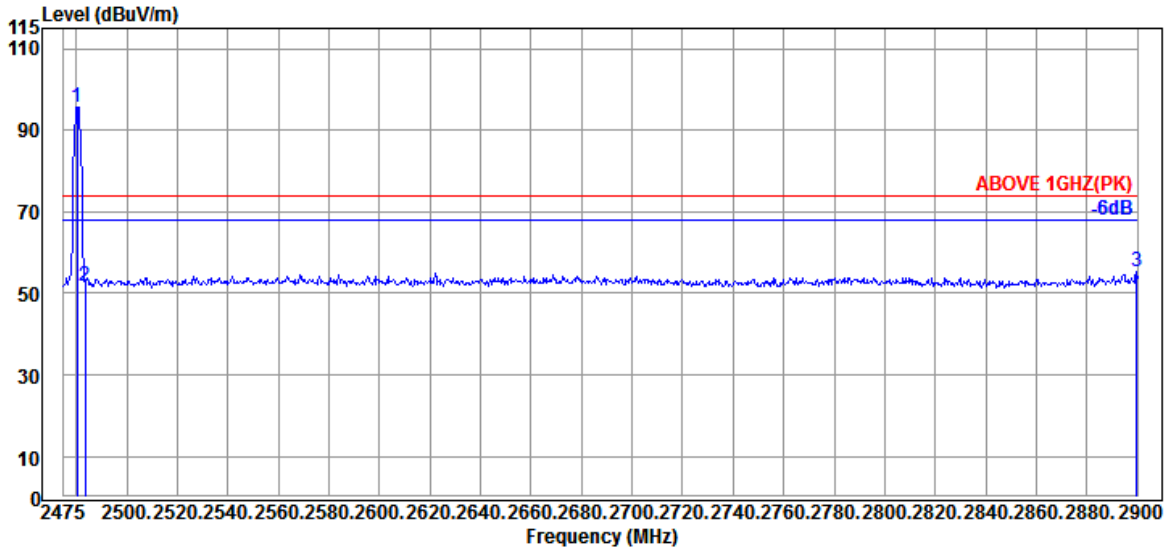

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.525	27.97	6.18	33.12	94.64	95.67	---	---	Peak
2483.500	28.01	6.18	33.11	50.85	51.93	74.00	22.07	Peak
2899.575	29.20	6.73	32.81	52.16	55.28	74.00	18.72	Peak

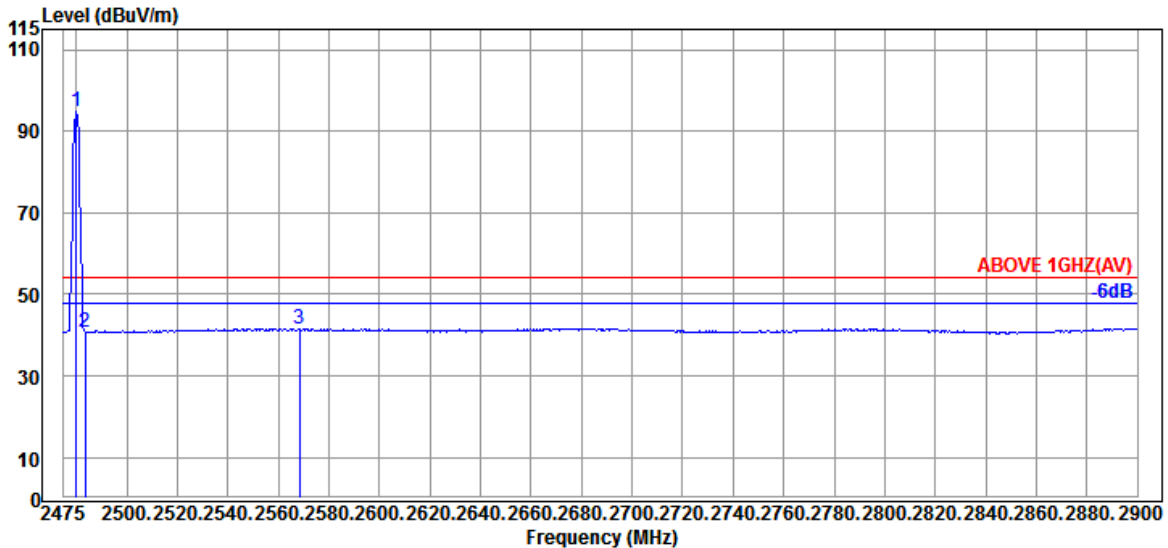

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	27.97	6.18	33.12	93.92	94.95	---	---	Average
2483.500	28.01	6.18	33.11	39.76	40.84	54.00	13.16	Average
2568.500	28.29	6.30	33.05	40.13	41.67	54.00	12.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	32.97	8.75	31.66	32.37	42.43	54.00	11.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	32.97	8.75	31.66	31.71	41.77	54.00	12.23	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.03	41.98	54.00	12.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	31.96	41.91	54.00	12.09	Peak

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	32.97	8.75	31.66	32.35	42.41	54.00	11.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	32.97	8.75	31.66	32.48	42.54	54.00	11.46	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	31.29	41.24	54.00	12.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	33.43	43.38	54.00	10.62	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	32.83	8.70	31.69	32.94	42.78	54.00	11.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	32.83	8.70	31.69	32.32	42.16	54.00	11.84	Peak

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.90	8.70	31.69	33.26	43.17	54.00	10.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.90	8.70	31.69	32.46	42.37	54.00	11.63	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.70	8.68	31.70	31.88	41.56	54.00	12.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.70	8.68	31.70	31.49	41.17	54.00	12.83	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	32.90	8.72	31.67	31.30	41.25	54.00	12.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	32.90	8.72	31.67	32.55	42.50	54.00	11.50	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.05	8.77	31.64	34.33	44.51	54.00	9.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.05	8.77	31.64	31.22	41.40	54.00	12.60	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9table 4 general radiated emissions limits is not required.

A.3 6dB OCCUPIED BANDWIDTH

Test Date	2021/12/28~2022/01/13	Temp./Hum.	14~15°C/58~63%
Cable Loss	WLAN: 0.80dB, BLE: 1.0dB	Tested By	Brian Hsieh
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Emission Bandwidth Result

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11b	2412	9.017	13.503	>500kHz
	2442	9.012	13.555	
	2462	9.024	13.465	
	2472	9.040	13.426	
802.11g	2412	15.12	16.536	
	2442	15.12	16.552	
	2462	15.12	16.520	
	2472	16.34	16.364	
802.11n-HT20	2412	15.16	17.727	
	2442	15.16	17.660	
	2462	15.16	17.687	
	2472	17.57	17.555	
802.11n-HT40	2422	35.13	35.815	
	2442	35.13	35.831	
	2452	35.15	35.838	
	2462	36.36	36.114	
802.11ax-HE20	2412	17.14	18.888	
	2442	16.84	18.885	
	2462	16.83	18.877	
	2472	18.23	18.656	
802.11ax-HE40	2422	35.10	37.342	
	2442	35.12	37.328	
	2452	35.04	37.377	
	2462	37.26	37.438	

Mode	RU Configuration	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11ax-HE20	26/0	2412	2.054	18.429	>500kHz
	52/37		17.00	18.291	
	106/53		17.15	18.219	
	26/8	2472	1.973	18.085	
	52/40		16.94	18.021	
	106/54		17.03	18.104	
802.11ax-HE40	242/61	2422	15.17	18.652	>500kHz
	242/62	2462	18.31	18.463	

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE (1M)	2402	0.6671	1.0595	>500kHz
	2440	0.6811	1.0570	
	2480	0.6885	1.0600	
BLE (2M)	2402	1.108	2.0682	
	2440	1.118	2.0629	
	2480	1.127	2.0627	
BLE (PHY Coded S2)	2402	0.6697	1.0655	
	2440	0.6673	1.0628	
	2480	0.6886	1.0618	
BLE (PHY Coded S8)	2402	0.6068	1.0443	
	2440	0.6071	1.0461	
	2480	0.6094	1.0481	

A.3.2 Measurement Plots

