

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	146
A.2.3 Emissions in Non-restricted Frequency Bands.....	161
A.3 26dB/6dB BANDWIDTH	162
A.3.1 26dB/6dB Bandwidth Result	162
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	192
A.4.1 Average Output Power	192
A.4.2 Measurement Plots	196
A.5 POWER SPECTRAL DENSITY	204
A.5.1 Power Spectral Density Result	204
A.5.2 Measurement Plots	208
A.6 FREQUENCY STABILITY	228
A.6.1 Frequency stability Result	228

A.1 CONDUCTED EMISSION

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

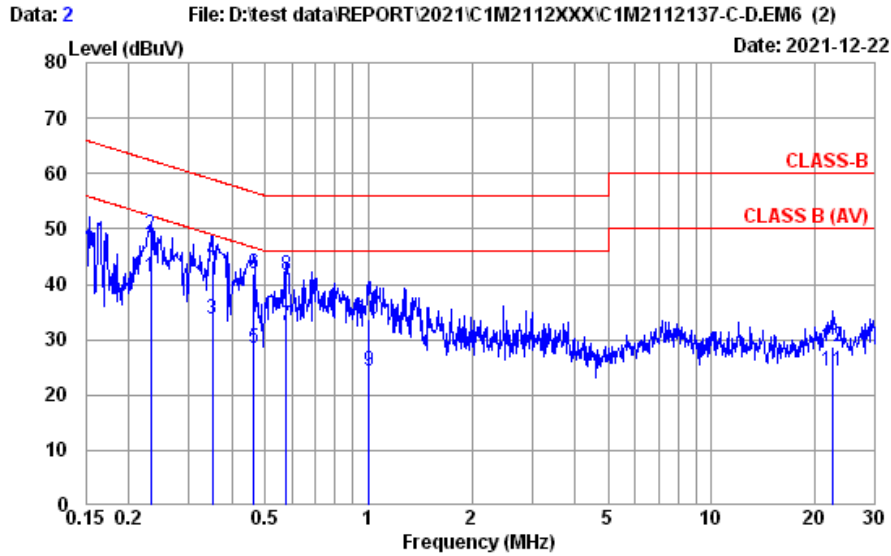


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.232	10.39	0.03	9.85	20.93	41.20	52.39	11.19	Average
2	0.232	10.39	0.03	9.85	28.52	48.79	62.39	13.60	QP
3	0.350	10.37	0.03	9.85	13.56	33.81	48.96	15.15	Average
4	0.350	10.37	0.03	9.85	23.91	44.16	58.96	14.80	QP
5	0.464	10.37	0.03	9.85	8.08	28.33	46.63	18.30	Average
6	0.464	10.37	0.03	9.85	21.60	41.85	56.63	14.78	QP
7	0.576	10.37	0.03	9.85	12.27	32.52	46.00	13.48	Average
8	0.576	10.37	0.03	9.85	21.40	41.65	56.00	14.35	QP
9	1.005	10.38	0.04	9.85	4.05	24.32	46.00	21.68	Average
10	1.005	10.38	0.04	9.85	13.30	33.57	56.00	22.43	QP
11	22.416	11.18	0.20	9.95	2.91	24.24	50.00	25.76	Average
12	22.416	11.18	0.20	9.95	7.36	28.69	60.00	31.31	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

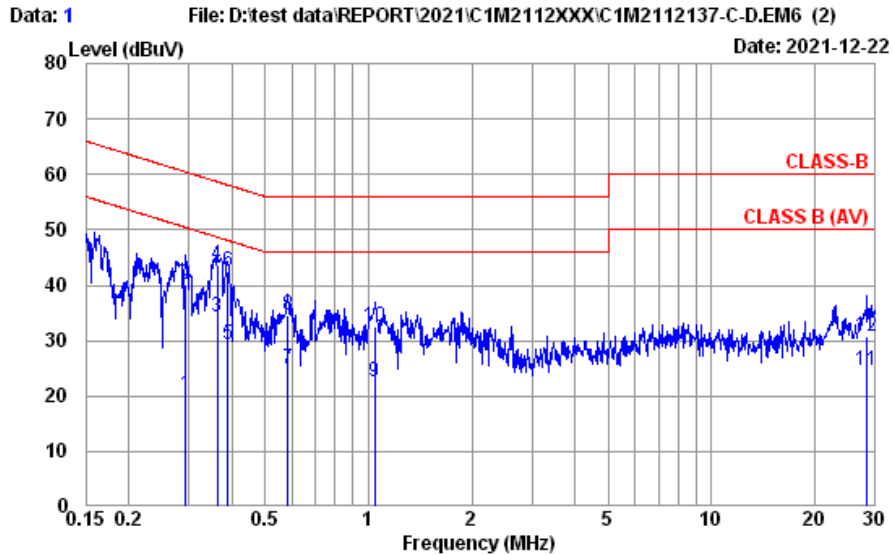

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G900	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.292	10.38	0.03	9.85	0.09	20.35	50.46	30.11	Average
2	0.292	10.38	0.03	9.85	19.99	40.25	60.46	20.21	QP
3	0.363	10.37	0.03	9.85	13.91	34.16	48.65	14.49	Average
4	0.363	10.37	0.03	9.85	23.43	43.68	58.65	14.97	QP
5	0.389	10.37	0.03	9.85	8.91	29.16	48.08	18.92	Average
6	0.389	10.37	0.03	9.85	22.27	42.52	58.08	15.56	QP
7	0.582	10.37	0.03	9.85	4.76	25.01	46.00	20.99	Average
8	0.582	10.37	0.03	9.85	14.44	34.69	56.00	21.31	QP
9	1.043	10.38	0.04	9.85	2.35	22.62	46.00	23.38	Average
10	1.043	10.38	0.04	9.85	12.35	32.62	56.00	23.38	QP
11	28.452	10.86	0.23	10.00	3.65	24.74	50.00	25.26	Average
12	28.452	10.86	0.23	10.00	9.80	30.89	60.00	29.11	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/12/18~2022/01/05	Temp./Hum.	20~23°C/59~62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	40.96	32.99	40.00	7.01	Peak
119.240	17.95	2.52	32.32	50.15	38.30	43.50	5.20	Peak
318.090	19.52	4.55	32.25	46.48	38.30	46.00	7.70	Peak
600.360	24.30	6.77	32.32	38.77	37.52	46.00	8.48	Peak
742.950	25.30	7.51	32.01	35.85	36.65	46.00	9.35	Peak
964.110	26.85	8.79	30.89	31.46	36.21	54.00	17.79	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	45.21	37.24	40.00	2.76	Peak
89.170	14.60	2.14	32.36	54.73	39.11	43.50	4.39	Peak
318.090	19.52	4.55	32.25	48.50	40.32	46.00	5.68	Peak
604.240	24.32	6.79	32.32	34.98	33.77	46.00	12.23	Peak
742.950	25.30	7.51	32.01	42.77	43.57	46.00	2.43	Peak
969.930	26.88	8.81	30.81	33.87	38.75	54.00	15.25	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

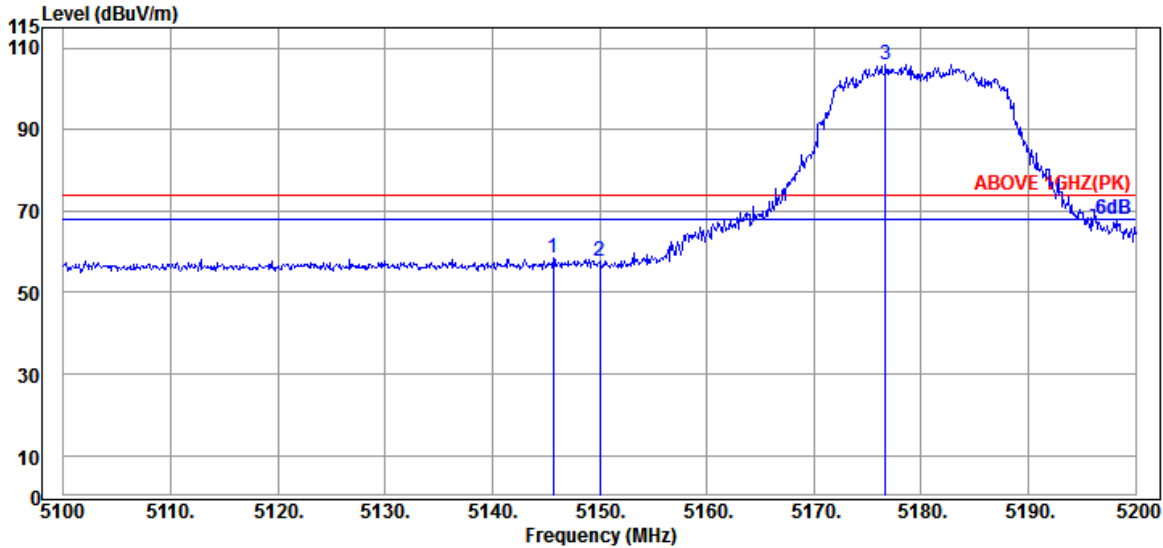

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.10	8.92	31.63	48.15	58.54	74.00	15.46	Peak
5150.000	33.10	8.92	31.63	47.12	57.51	74.00	16.49	Peak
@ 5176.700	33.17	8.95	31.63	95.55	106.04	---	---	Peak

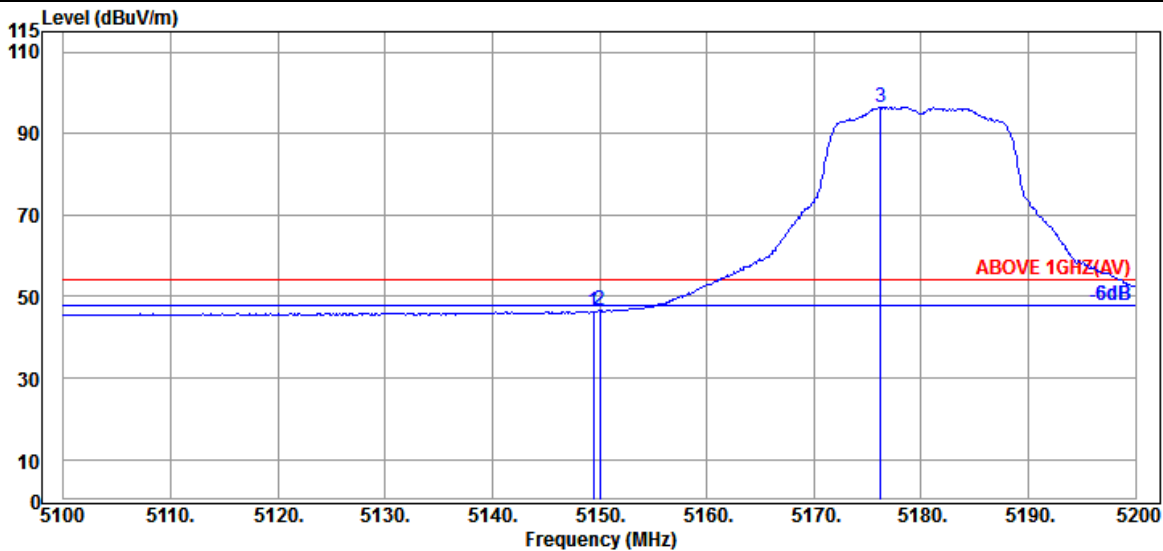


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.10	8.92	31.63	36.01	46.40	54.00	7.60	Average
5150.000	33.10	8.92	31.63	36.16	46.55	54.00	7.45	Average
@ 5176.200	33.17	8.95	31.63	85.90	96.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

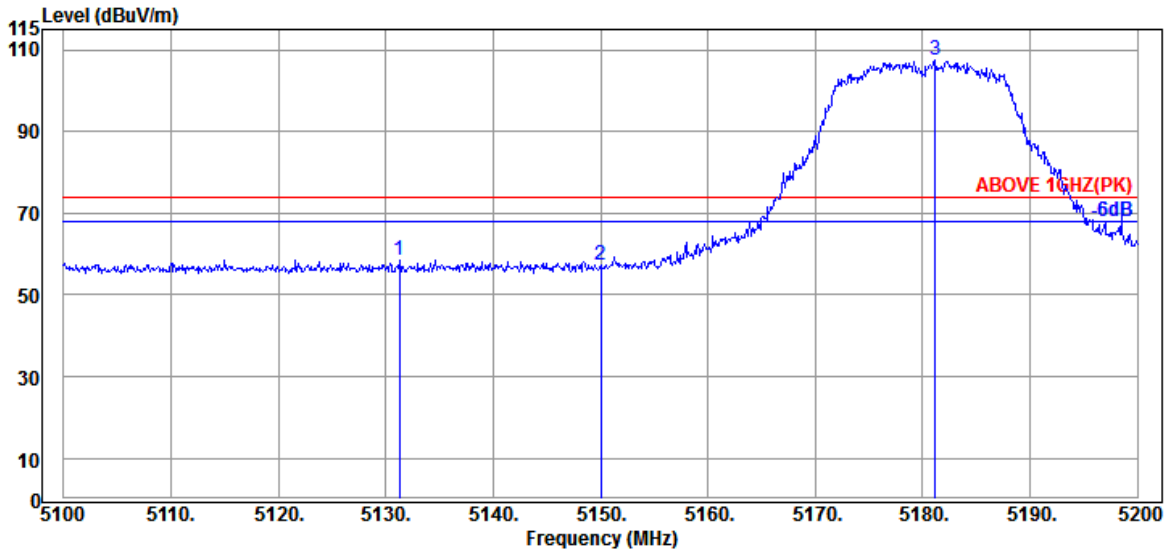

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.300	33.07	8.91	31.63	48.31	58.66	74.00	15.34	Peak
5150.000	33.10	8.92	31.63	46.95	57.34	74.00	16.66	Peak
@ 5181.200	33.17	8.95	31.63	97.19	107.68	---	---	Peak

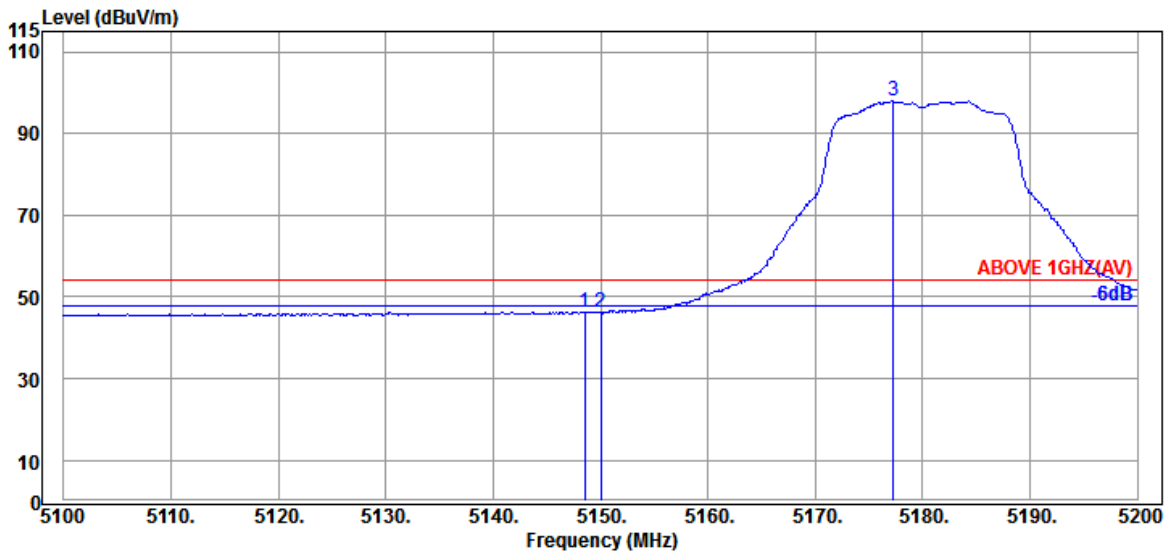


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.10	8.92	31.63	35.95	46.34	54.00	7.66	Average
5150.000	33.10	8.92	31.63	35.72	46.11	54.00	7.89	Average
@ 5177.300	33.17	8.95	31.63	87.41	97.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

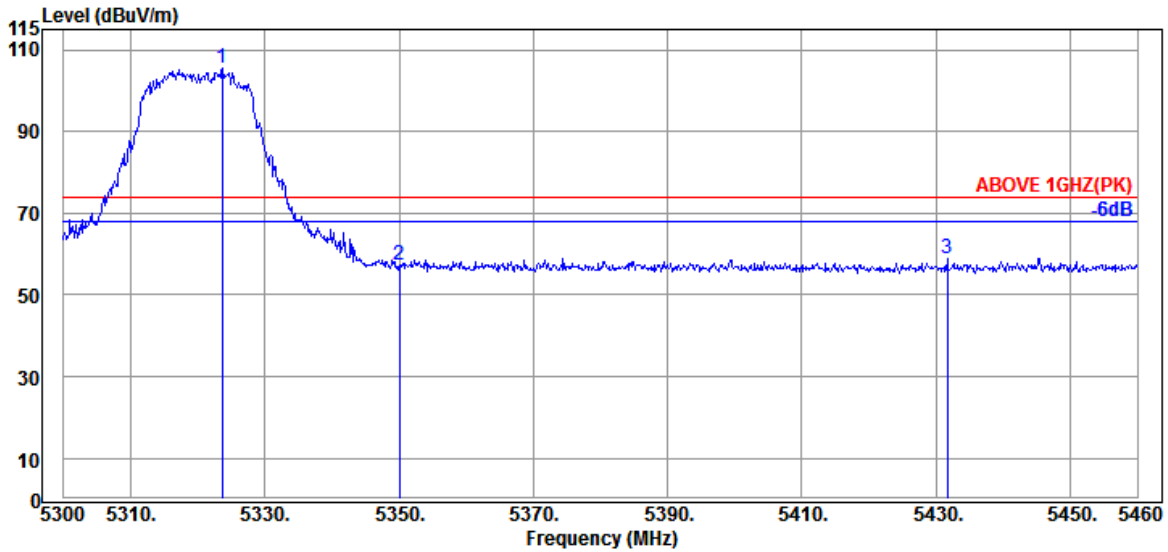

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.680	33.40	9.07	31.63	94.53	105.37	---	---	Peak
	5350.080	33.50	9.10	31.63	46.49	57.46	74.00	16.54	Peak
	5431.680	33.80	9.17	31.63	47.57	58.91	74.00	15.09	Peak

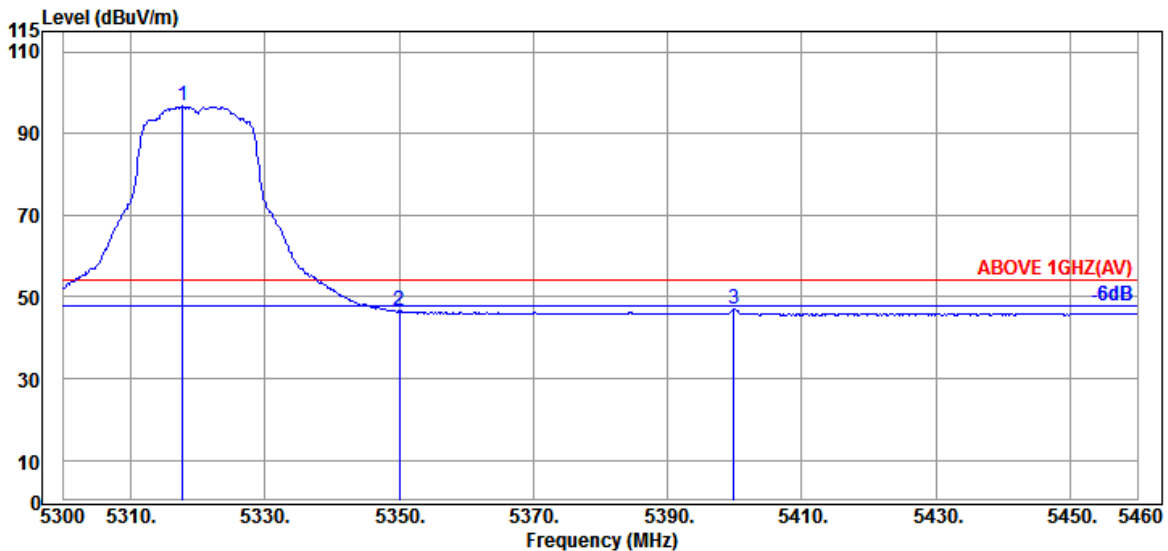


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.760	33.30	9.07	31.63	85.92	96.66	---	---	Average
	5350.080	33.50	9.10	31.63	35.53	46.50	54.00	7.50	Average
	5399.840	33.70	9.14	31.63	35.82	47.03	54.00	6.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

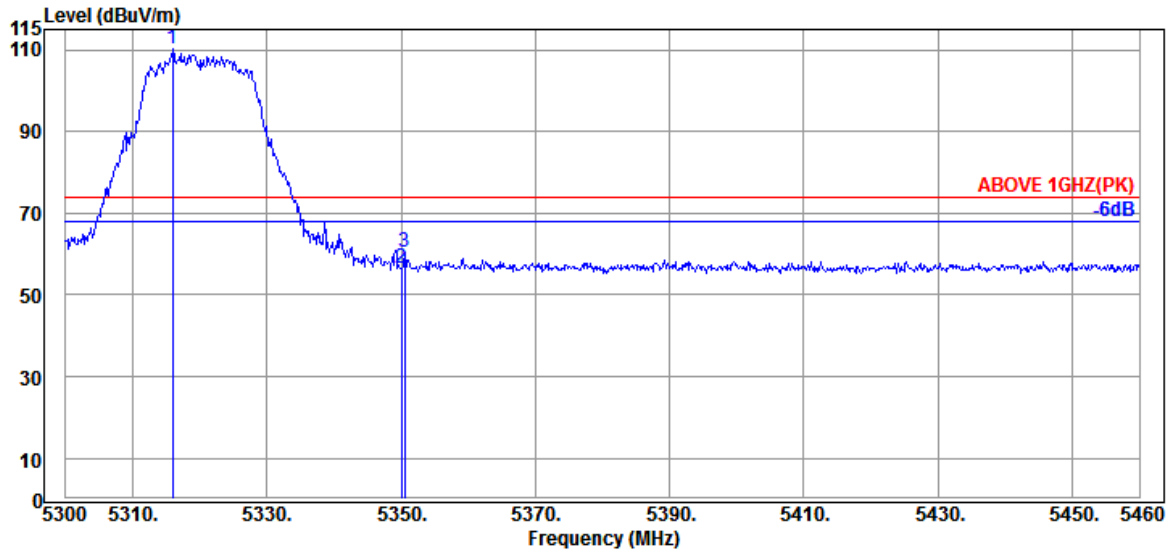

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	33.30	9.07	31.63	99.40	110.14	---	---	Peak
5350.080	33.50	9.10	31.63	45.74	56.71	74.00	17.29	Peak
5350.560	33.50	9.10	31.63	49.33	60.30	74.00	13.70	Peak

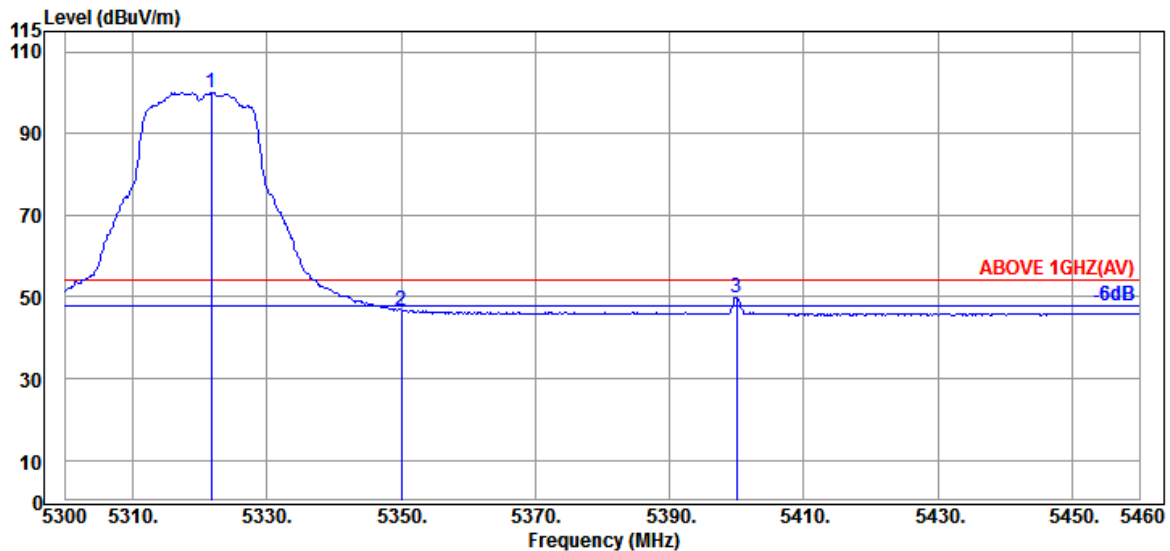


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	33.30	9.07	31.63	89.21	99.95	---	---	Average
5350.080	33.50	9.10	31.63	35.77	46.74	54.00	7.26	Average
5400.000	33.70	9.14	31.63	38.77	49.98	54.00	4.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

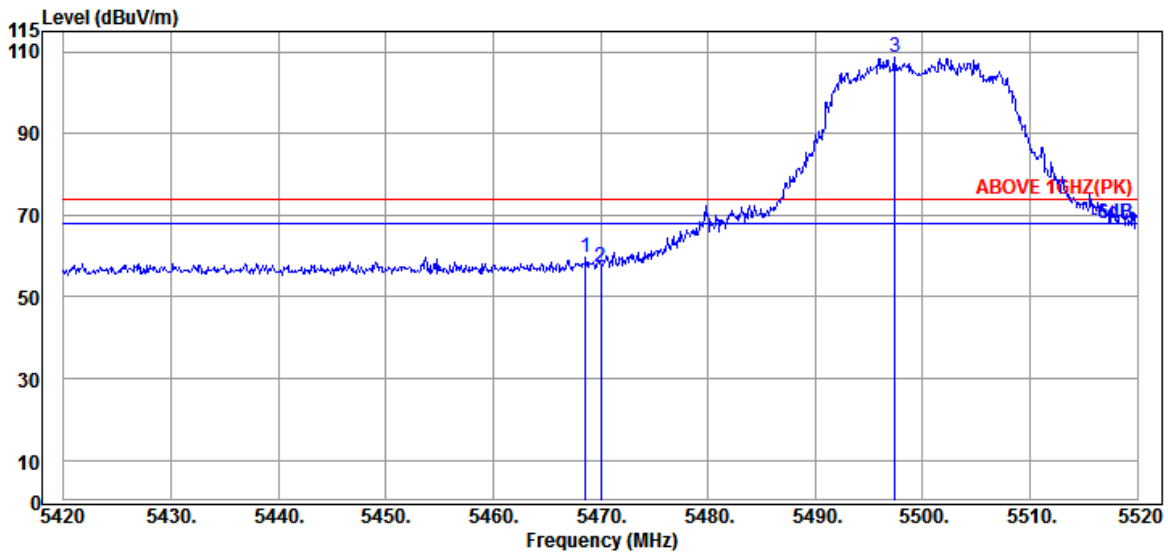

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	33.97	9.20	31.63	48.20	59.74	74.00	14.26	Peak
5470.000	33.97	9.20	31.63	45.86	57.40	74.00	16.60	Peak
@ 5497.400	34.10	9.23	31.63	97.08	108.78	---	---	Peak

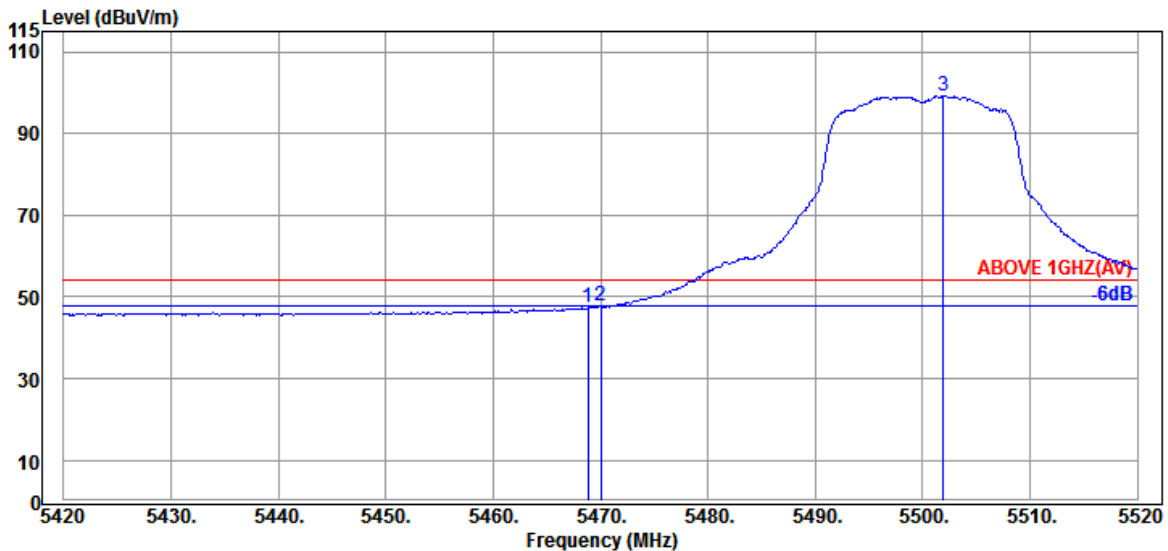


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	33.97	9.20	31.63	35.78	47.32	54.00	6.68	Average
5470.000	33.97	9.20	31.63	36.10	47.64	54.00	6.36	Average
@ 5501.900	34.10	9.23	31.63	87.52	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

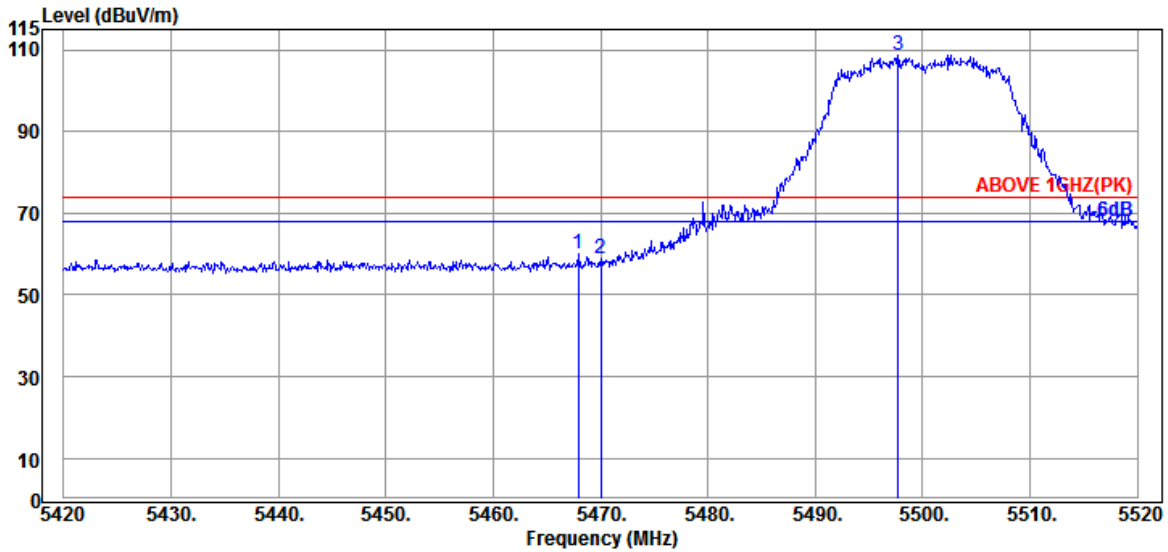

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	33.97	9.20	31.63	48.34	59.88	74.00	14.12	Peak
5470.000	33.97	9.20	31.63	47.51	59.05	74.00	14.95	Peak
@ 5497.700	34.10	9.23	31.63	97.12	108.82	---	---	Peak

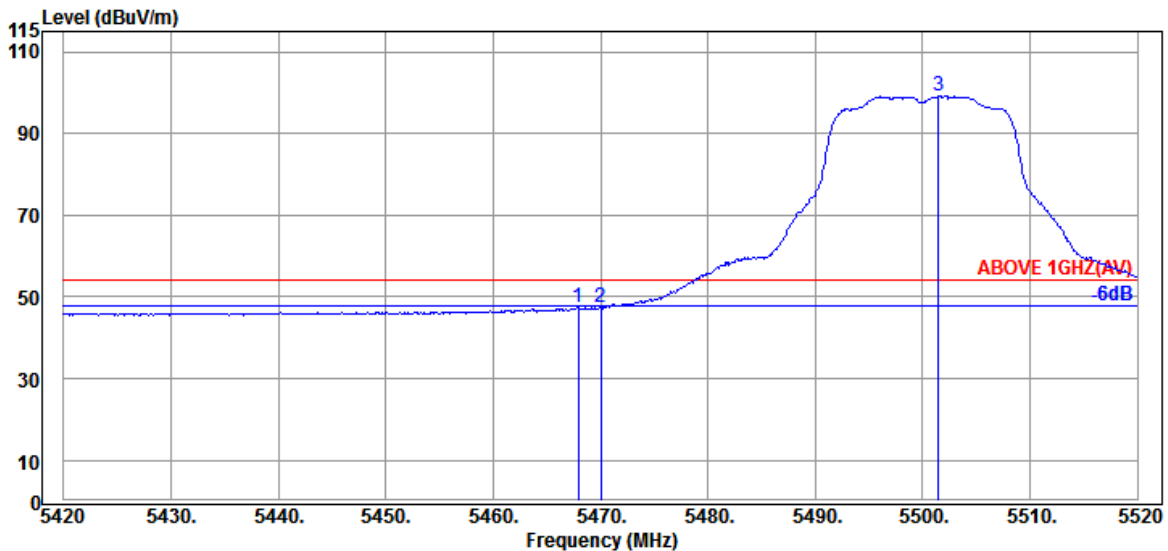


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	33.97	9.20	31.63	35.80	47.34	54.00	6.66	Average
5470.000	33.97	9.20	31.63	35.78	47.32	54.00	6.68	Average
@ 5501.500	34.10	9.23	31.63	87.57	99.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

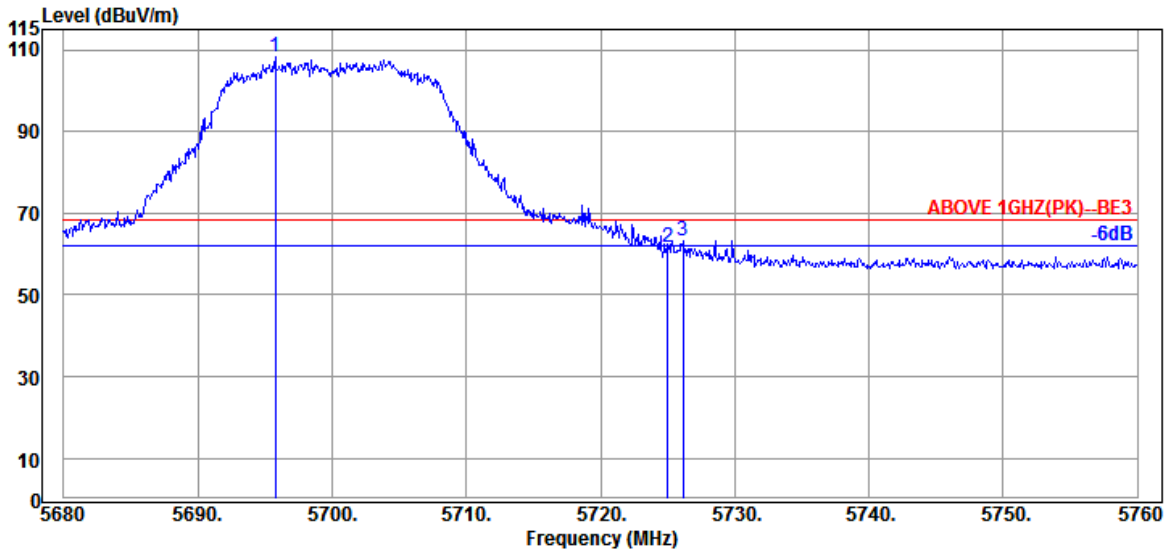

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.760	34.30	9.39	31.73	96.20	108.16	---	---	Peak
5725.040	34.50	9.42	31.74	49.32	61.50	68.20	6.70	Peak
5726.160	34.50	9.42	31.74	51.23	63.41	68.20	4.79	Peak

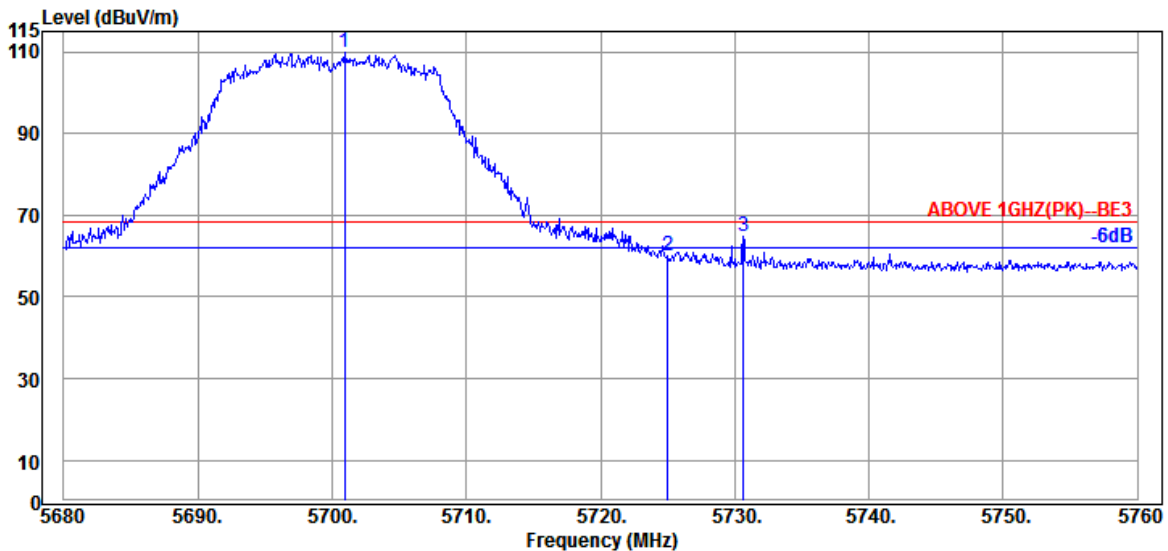


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	34.30	9.40	31.73	97.85	109.82	---	---	Peak
5725.040	34.50	9.42	31.74	48.06	60.24	68.20	7.96	Peak
5730.640	34.50	9.42	31.75	52.54	64.71	68.20	3.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

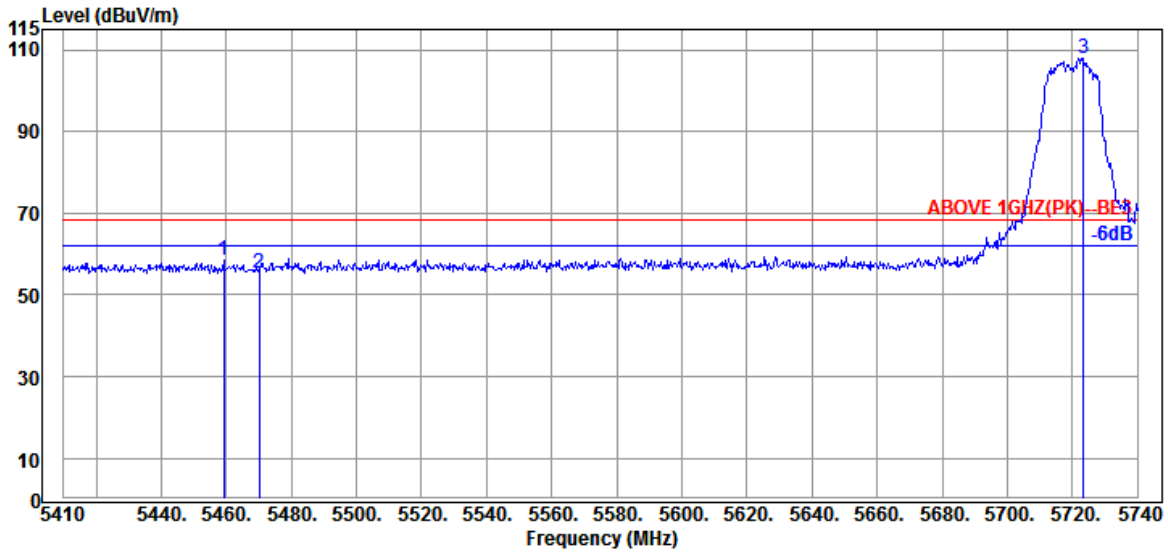

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.170	33.90	9.18	31.63	46.99	58.44	68.20	9.76	Peak
5470.060	33.97	9.20	31.63	43.88	55.42	68.20	12.78	Peak
@ 5723.500	34.50	9.42	31.74	95.65	107.83	---	---	Peak

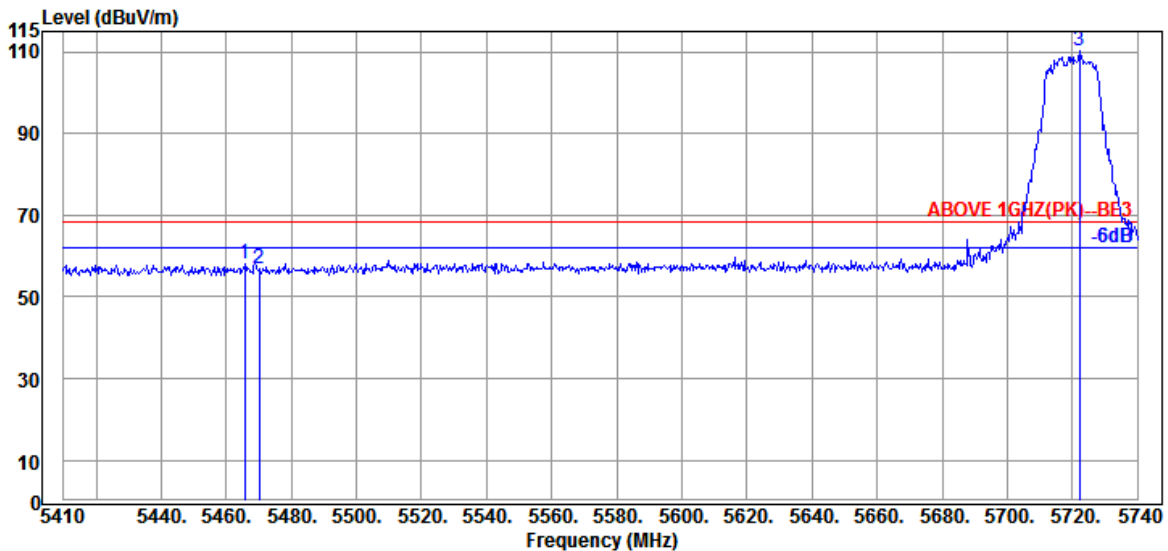


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.770	33.97	9.20	31.63	46.63	58.17	68.20	10.03	Peak
5470.060	33.97	9.20	31.63	45.32	56.86	68.20	11.34	Peak
@ 5722.180	34.50	9.42	31.74	98.06	110.24	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

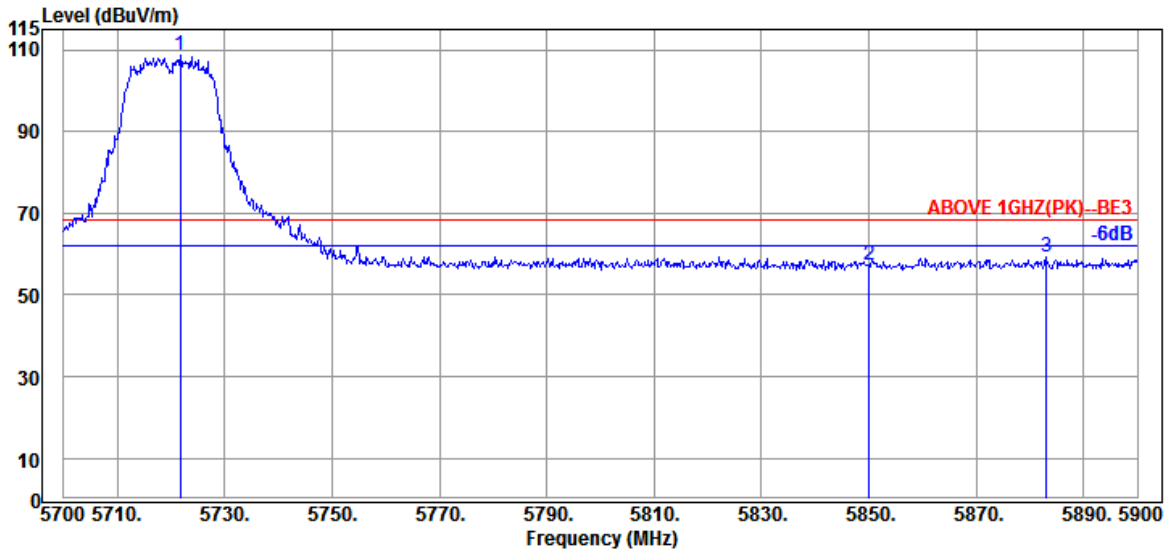

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.800	34.40	9.42	31.74	96.45	108.53	---	---	Peak
5850.000	35.00	9.52	31.80	44.74	57.46	68.20	10.74	Peak
5883.000	35.07	9.55	31.82	46.60	59.40	68.20	8.80	Peak

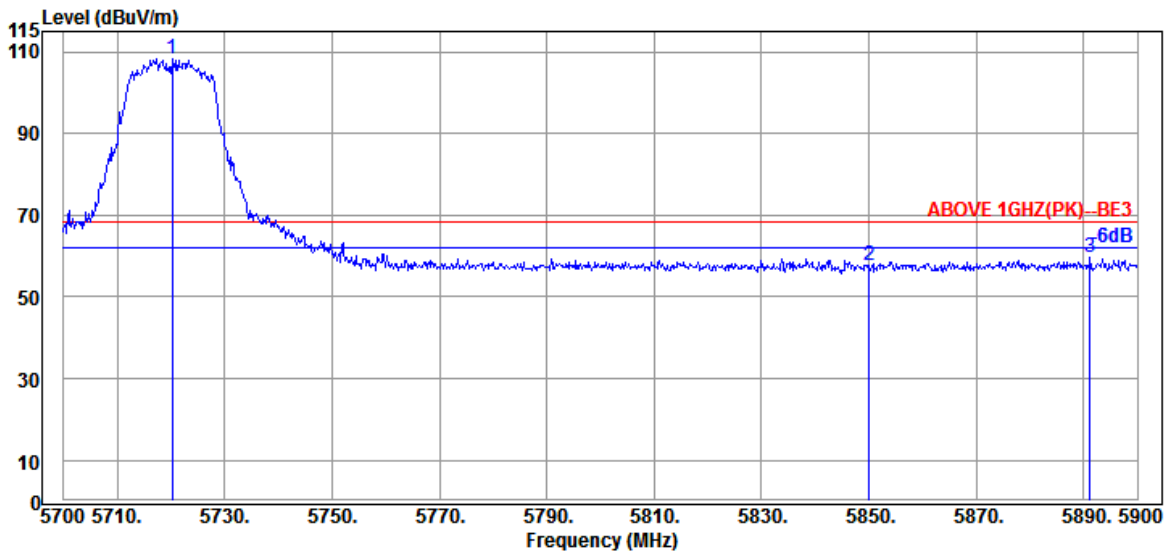


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.200	34.40	9.42	31.74	96.17	108.25	---	---	Peak
5850.000	35.00	9.52	31.80	45.13	57.85	68.20	10.35	Peak
5891.200	35.10	9.56	31.82	46.86	59.70	68.20	8.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

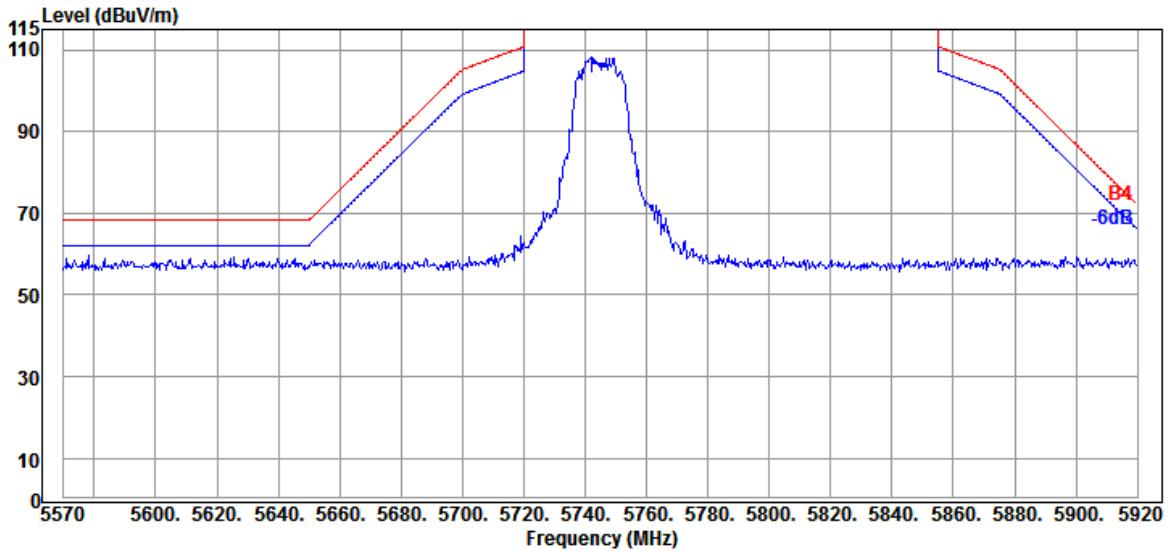


Antenna at Vertical Polarization

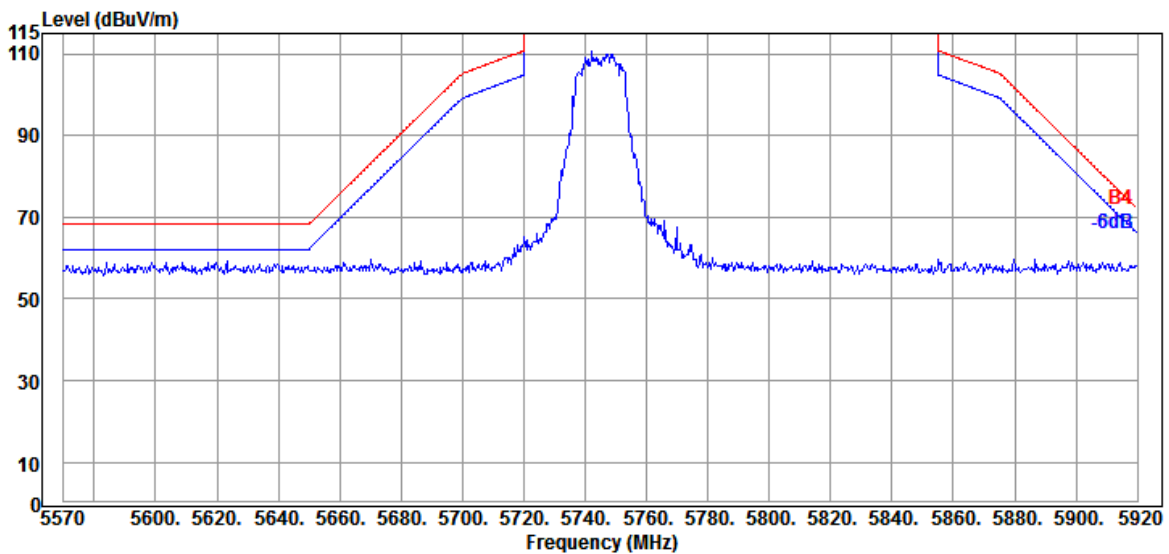


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

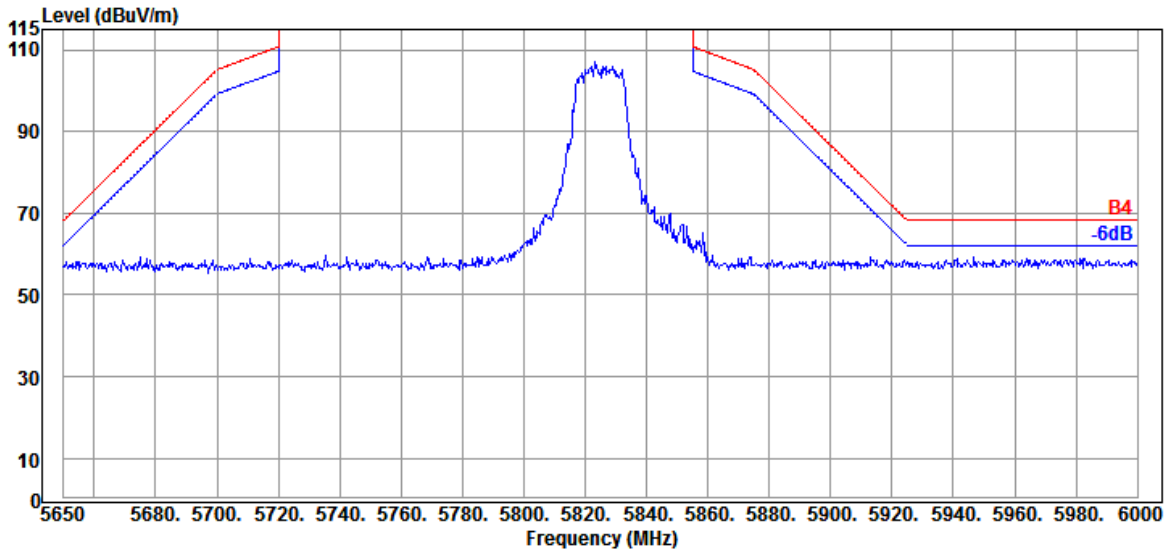

Antenna at Vertical Polarization

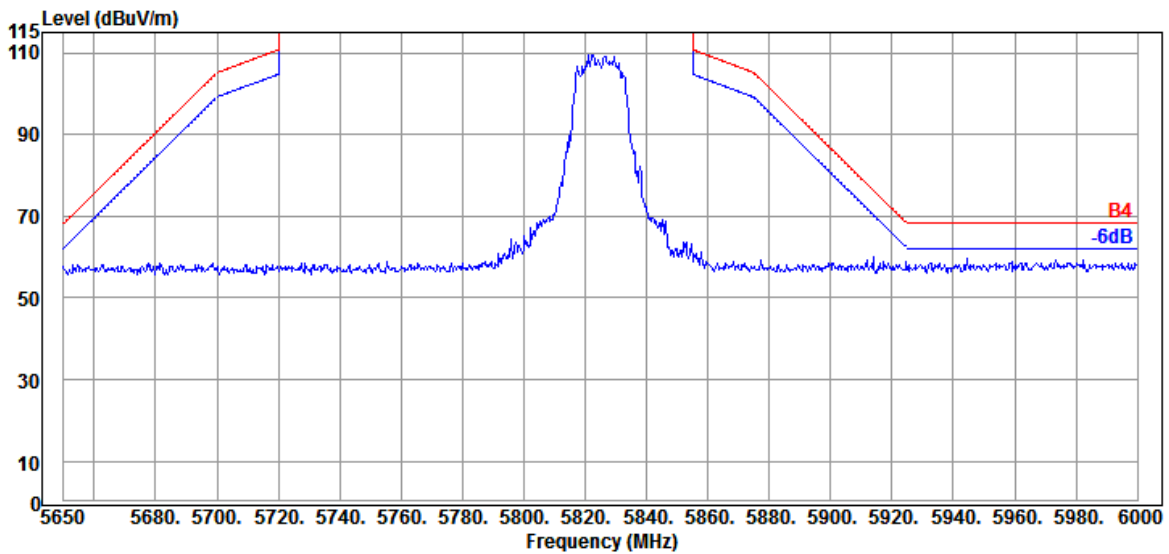


Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

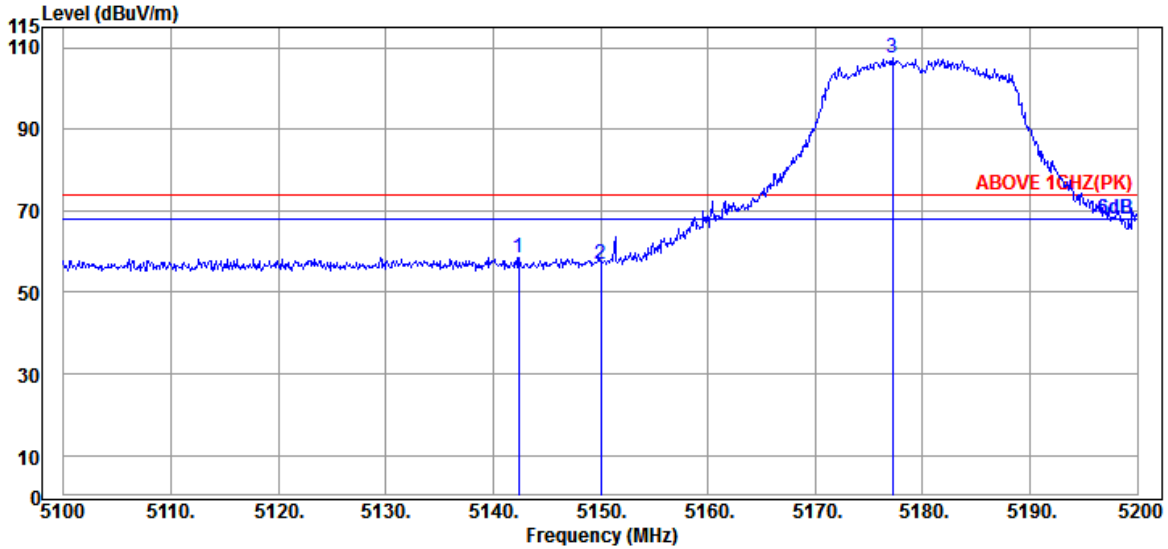

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.10	8.92	31.63	48.17	58.56	74.00	15.44	Peak
5150.000	33.10	8.92	31.63	46.62	57.01	74.00	16.99	Peak
@ 5177.200	33.17	8.95	31.63	97.01	107.50	---	---	Peak

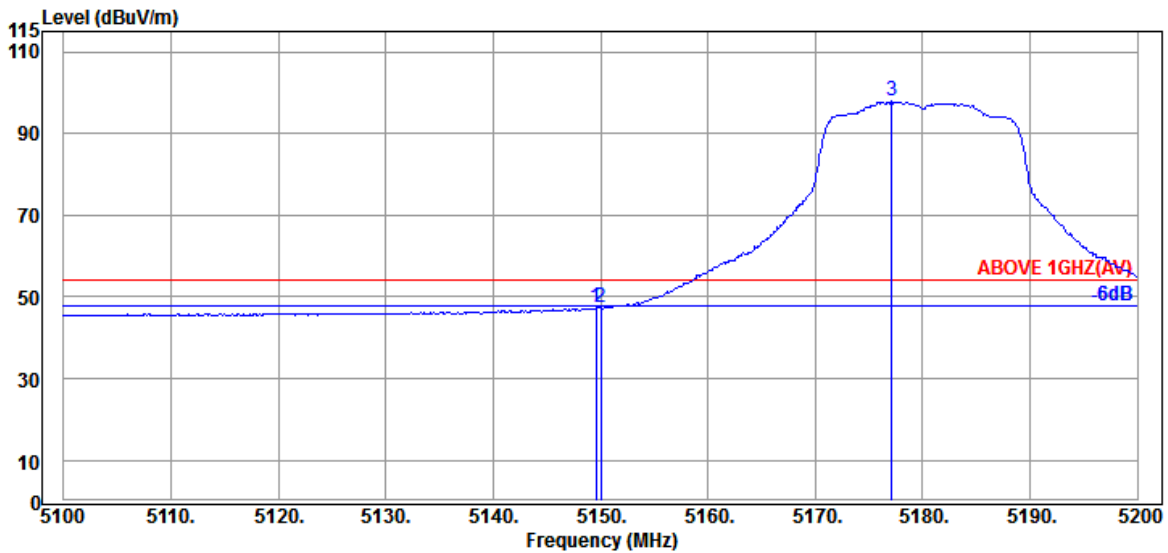


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	37.02	47.41	54.00	6.59	Average
5150.000	33.10	8.92	31.63	37.05	47.44	54.00	6.56	Average
@ 5177.100	33.17	8.95	31.63	87.37	97.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

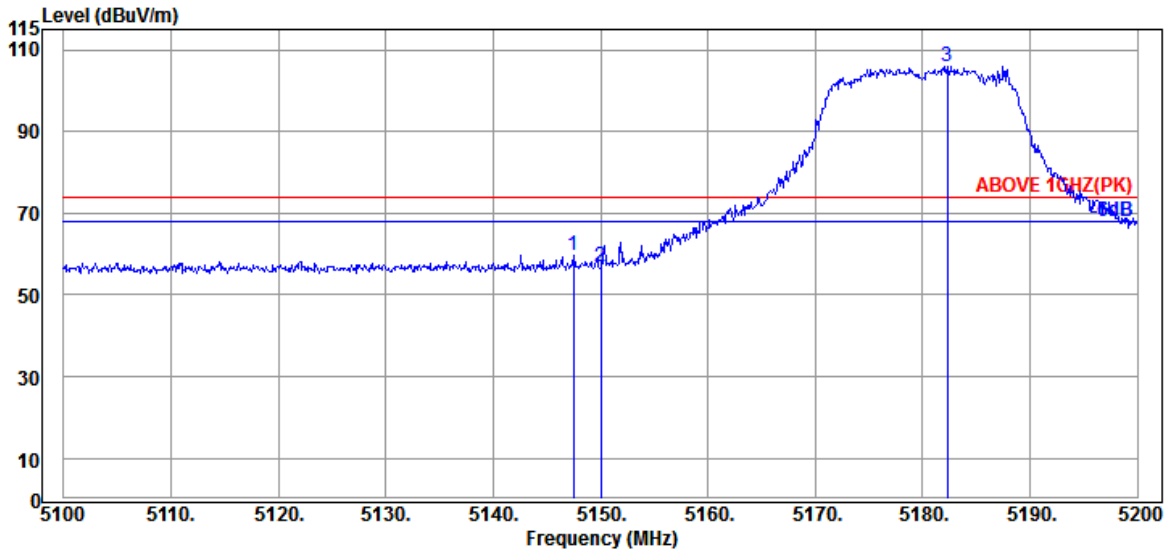

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.10	8.92	31.63	49.11	59.50	74.00	14.50	Peak
5150.000	33.10	8.92	31.63	46.58	56.97	74.00	17.03	Peak
@ 5182.300	33.17	8.95	31.63	95.59	106.08	---	---	Peak

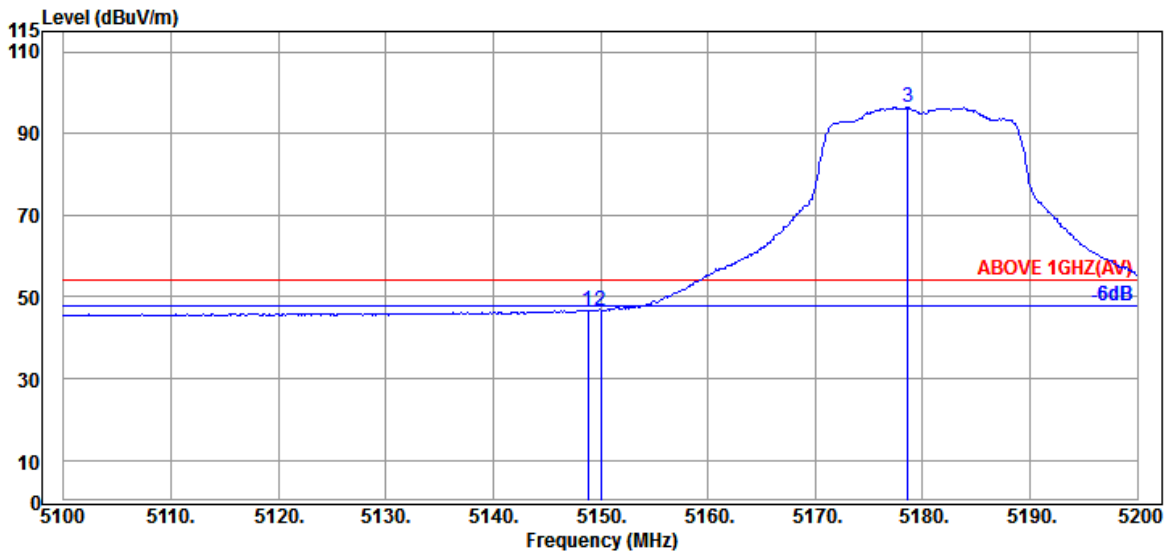


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.10	8.92	31.63	36.39	46.78	54.00	7.22	Average
5150.000	33.10	8.92	31.63	36.35	46.74	54.00	7.26	Average
@ 5178.600	33.17	8.95	31.63	85.88	96.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

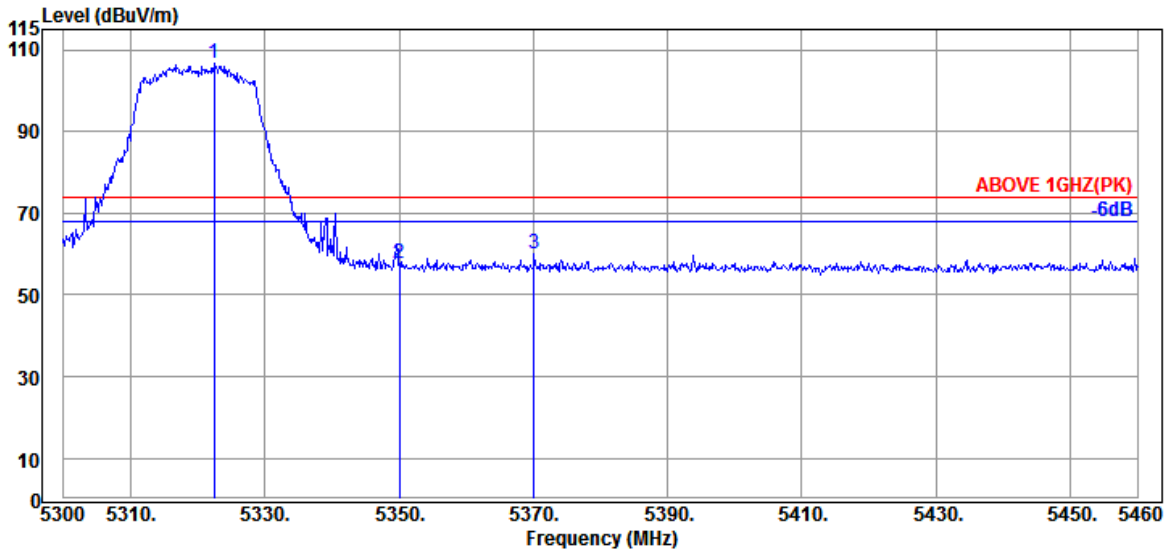

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	33.30	9.07	31.63	95.78	106.52	---	---	Peak
5350.080	33.50	9.10	31.63	46.66	57.63	74.00	16.37	Peak
5370.080	33.63	9.11	31.63	48.85	59.96	74.00	14.04	Peak

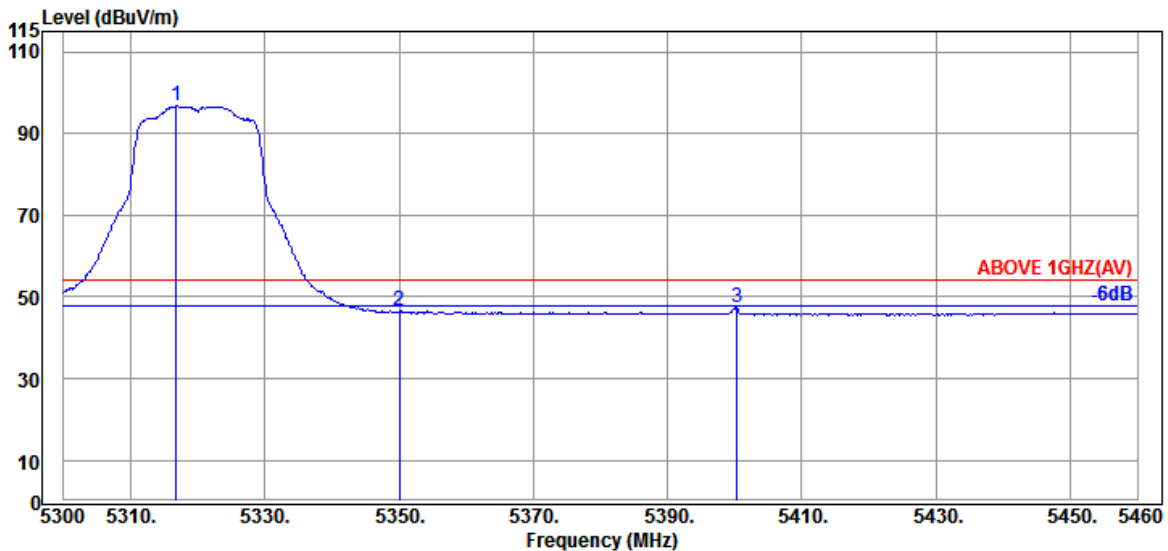


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	33.30	9.07	31.63	86.20	96.94	---	---	Average
5350.080	33.50	9.10	31.63	35.53	46.50	54.00	7.50	Average
5400.320	33.70	9.14	31.63	36.29	47.50	54.00	6.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

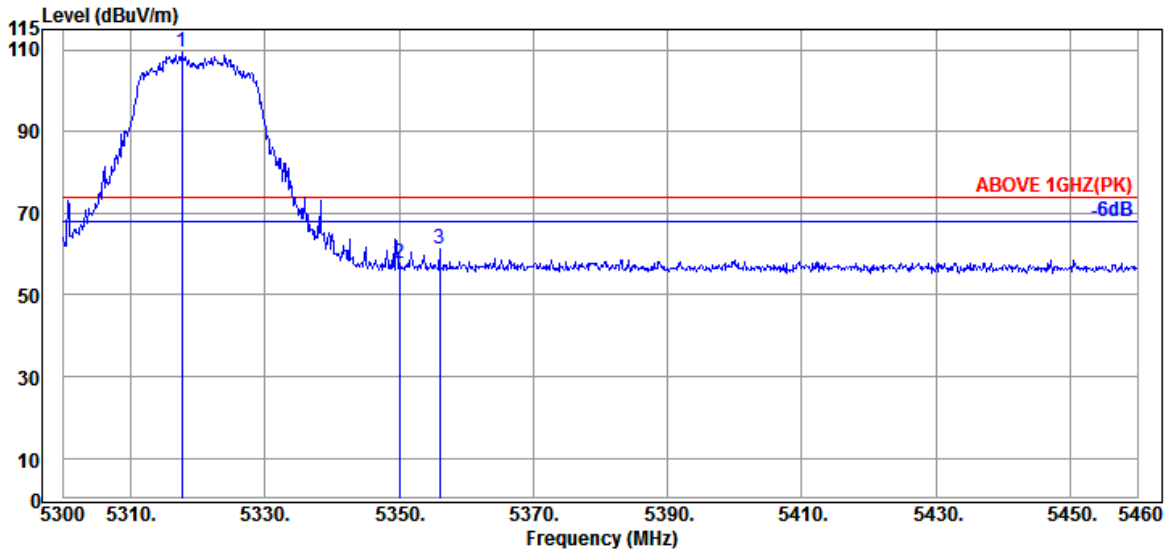

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	33.30	9.07	31.63	98.76	109.50	---	---	Peak
5350.080	33.50	9.10	31.63	46.61	57.58	74.00	16.42	Peak
5356.000	33.57	9.10	31.63	50.25	61.29	74.00	12.71	Peak

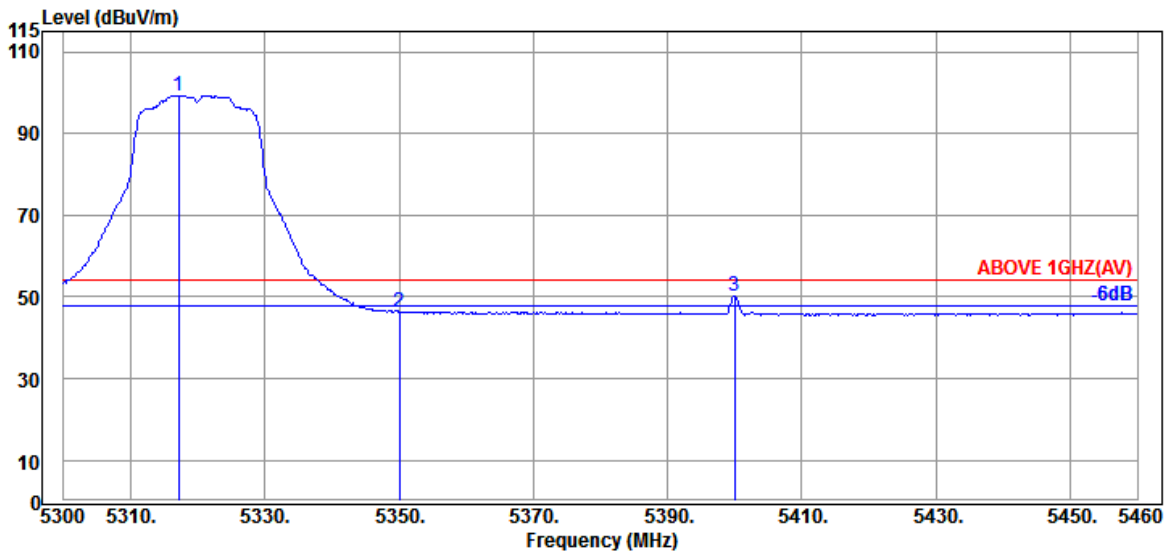


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	33.30	9.07	31.63	88.58	99.32	---	---	Average
5350.080	33.50	9.10	31.63	35.38	46.35	54.00	7.65	Average
5400.000	33.70	9.14	31.63	39.05	50.26	54.00	3.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

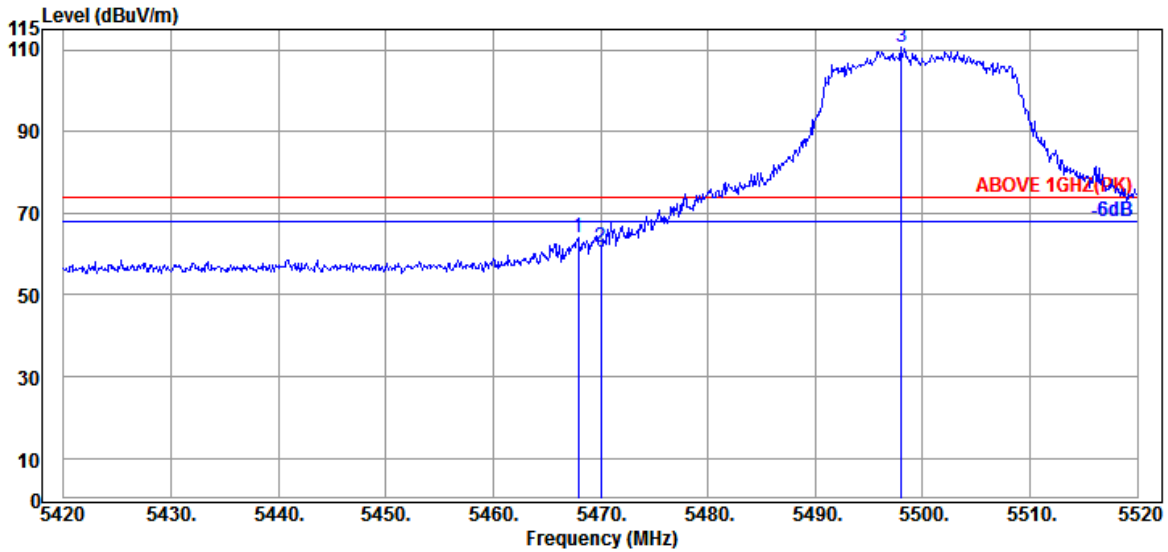

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	33.97	9.20	31.63	52.39	63.93	74.00	10.07	Peak
5470.000	33.97	9.20	31.63	50.18	61.72	74.00	12.28	Peak
@ 5498.000	34.10	9.23	31.63	98.96	110.66	---	---	Peak

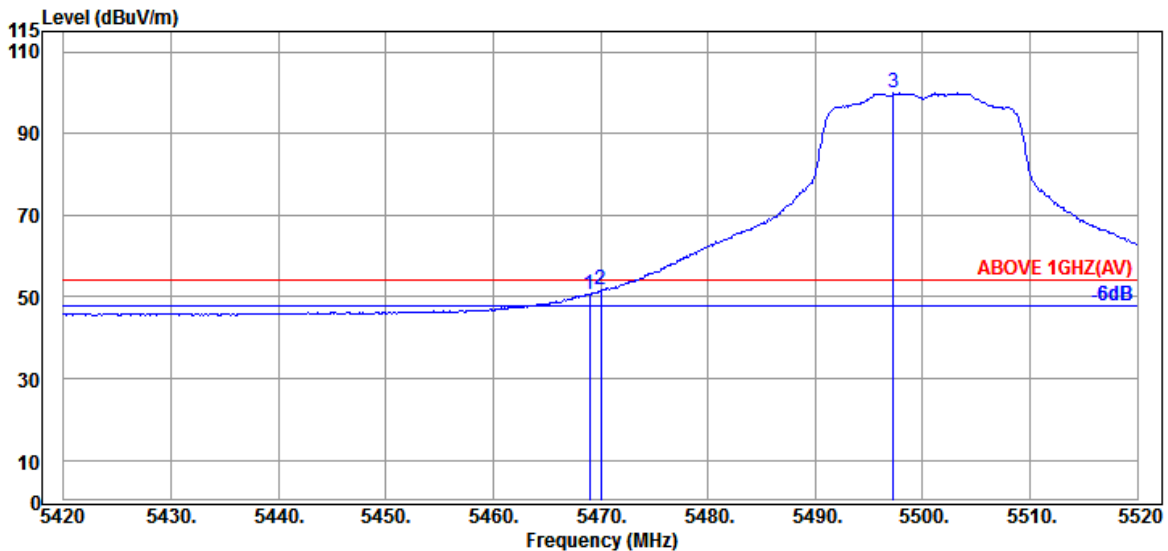


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	39.22	50.76	54.00	3.24	Average
5470.000	33.97	9.20	31.63	40.14	51.68	54.00	2.32	Average
@ 5497.300	34.10	9.23	31.63	88.17	99.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

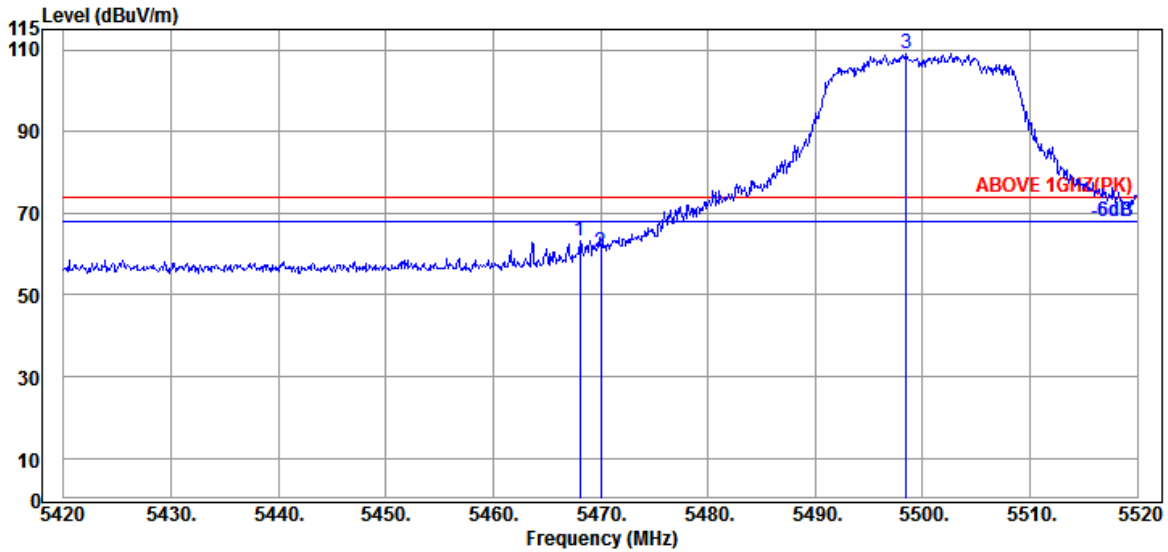

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	33.97	9.20	31.63	51.65	63.19	74.00	10.81	Peak
5470.000	33.97	9.20	31.63	48.97	60.51	74.00	13.49	Peak
@ 5498.500	34.10	9.23	31.63	97.42	109.12	---	---	Peak

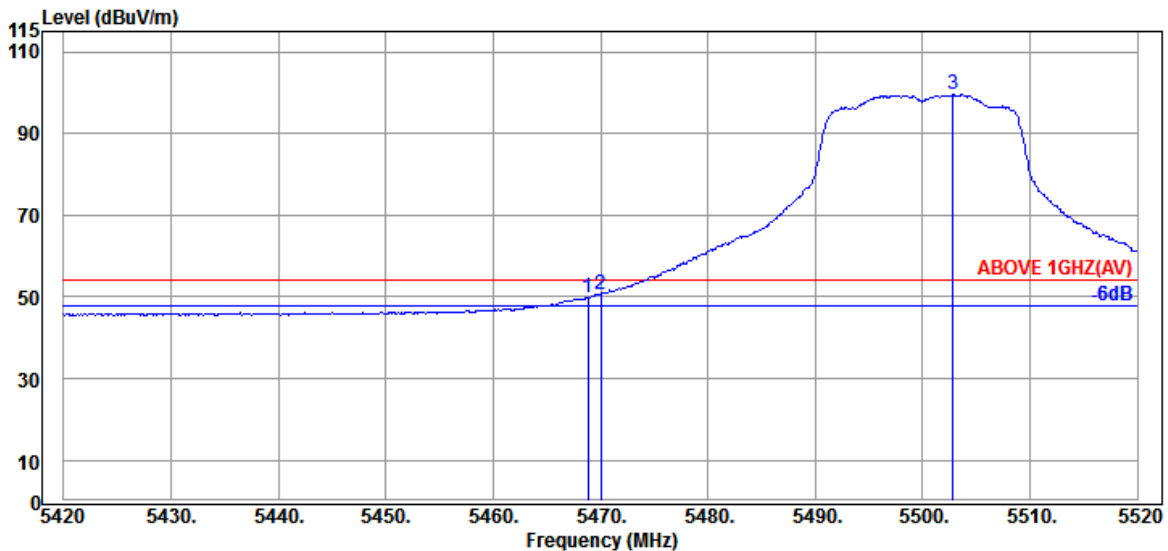


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	33.97	9.20	31.63	38.45	49.99	54.00	4.01	Average
5470.000	33.97	9.20	31.63	39.18	50.72	54.00	3.28	Average
@ 5502.800	34.10	9.23	31.63	87.87	99.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

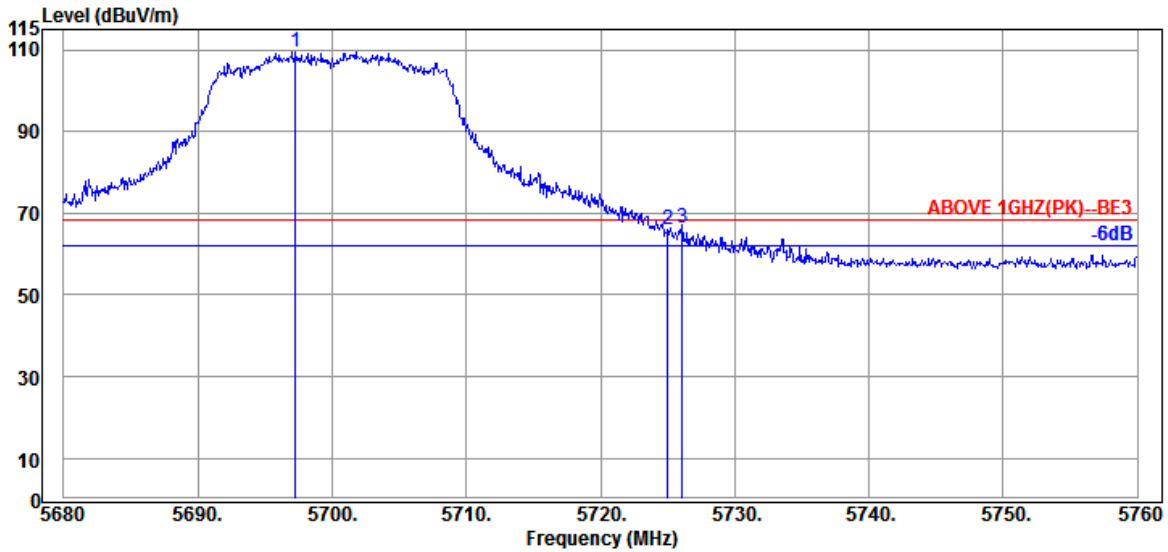

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.280	34.30	9.39	31.73	97.50	109.46	---	---	Peak
5725.040	34.50	9.42	31.74	53.62	65.80	68.20	2.40	Peak
5726.080	34.50	9.42	31.74	54.35	66.53	68.20	1.67	Peak

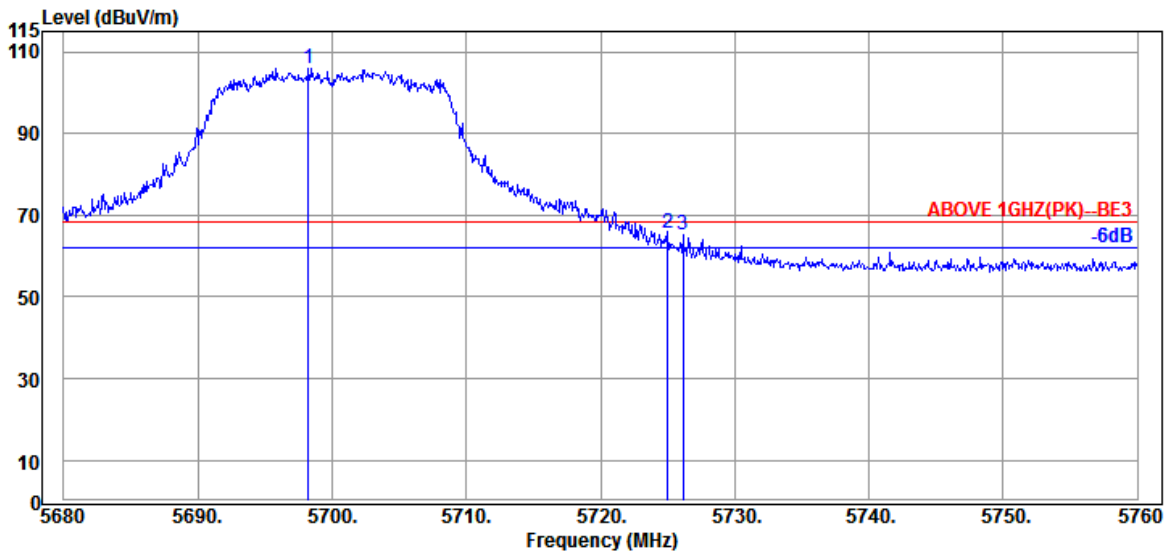


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.240	34.30	9.39	31.73	94.13	106.09	---	---	Peak
5725.040	34.50	9.42	31.74	53.41	65.59	68.20	2.61	Peak
5726.160	34.50	9.42	31.74	52.98	65.16	68.20	3.04	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

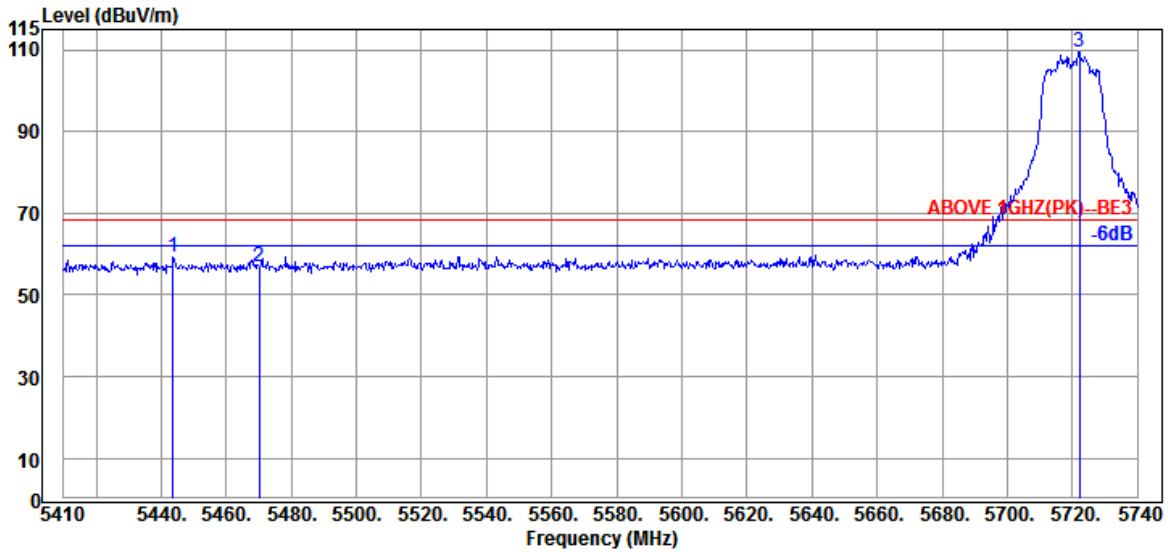

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.660	33.85	9.17	31.63	47.84	59.23	68.20	8.97	Peak
5470.060	33.97	9.20	31.63	45.21	56.75	68.20	11.45	Peak
@ 5722.180	34.50	9.42	31.74	97.42	109.60	---	---	Peak

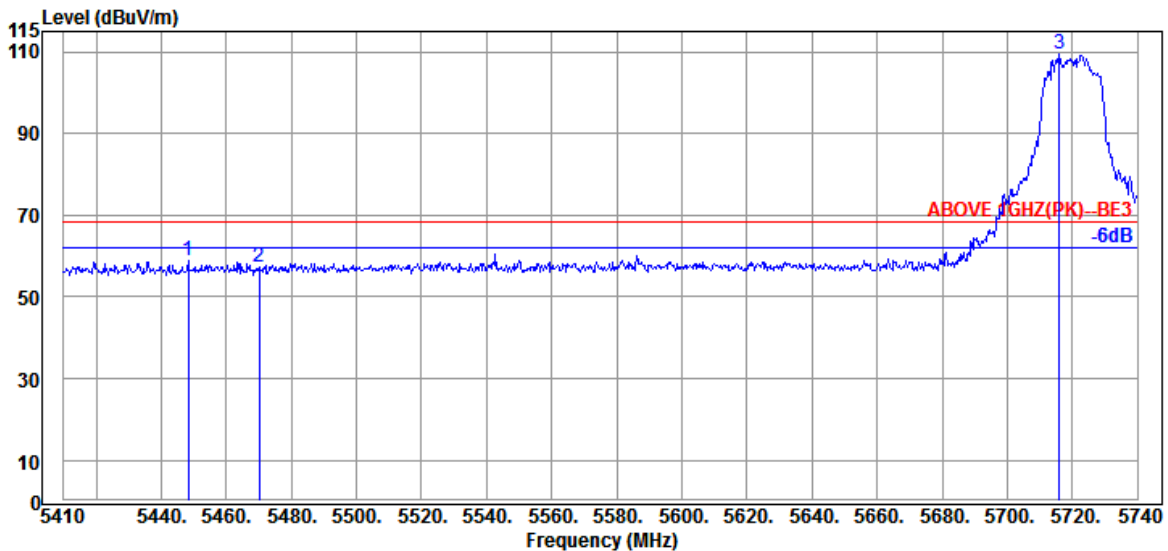


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.280	33.90	9.18	31.63	47.30	58.75	68.20	9.45	Peak
5470.060	33.97	9.20	31.63	45.59	57.13	68.20	11.07	Peak
@ 5715.910	34.40	9.40	31.74	97.34	109.40	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

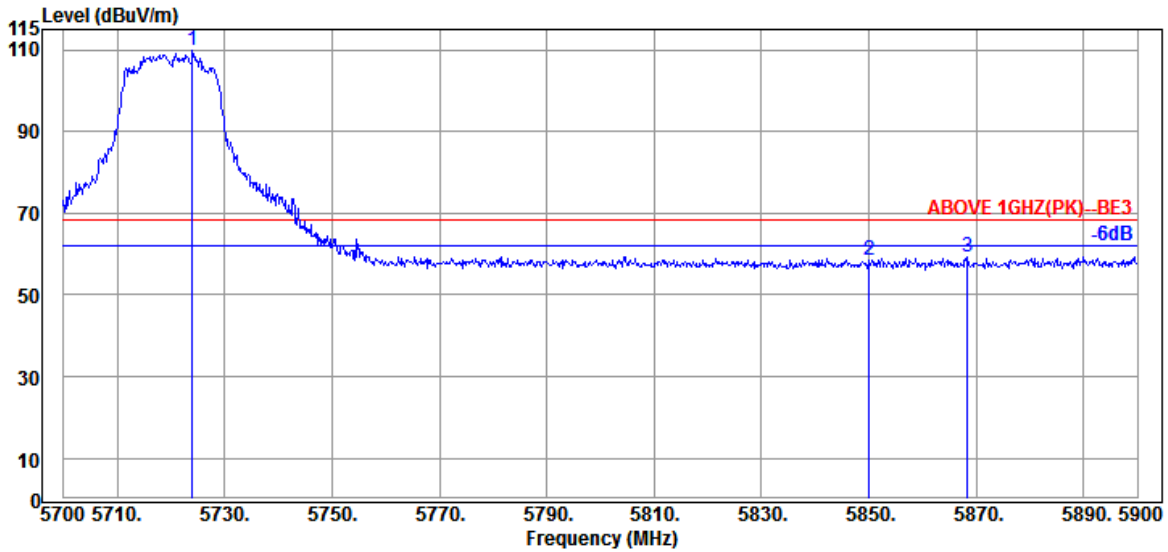

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.50	9.42	31.74	97.85	110.03	---	---	Peak
5850.000	35.00	9.52	31.80	45.58	58.30	68.20	9.90	Peak
5868.400	35.03	9.53	31.81	46.59	59.34	68.20	8.86	Peak

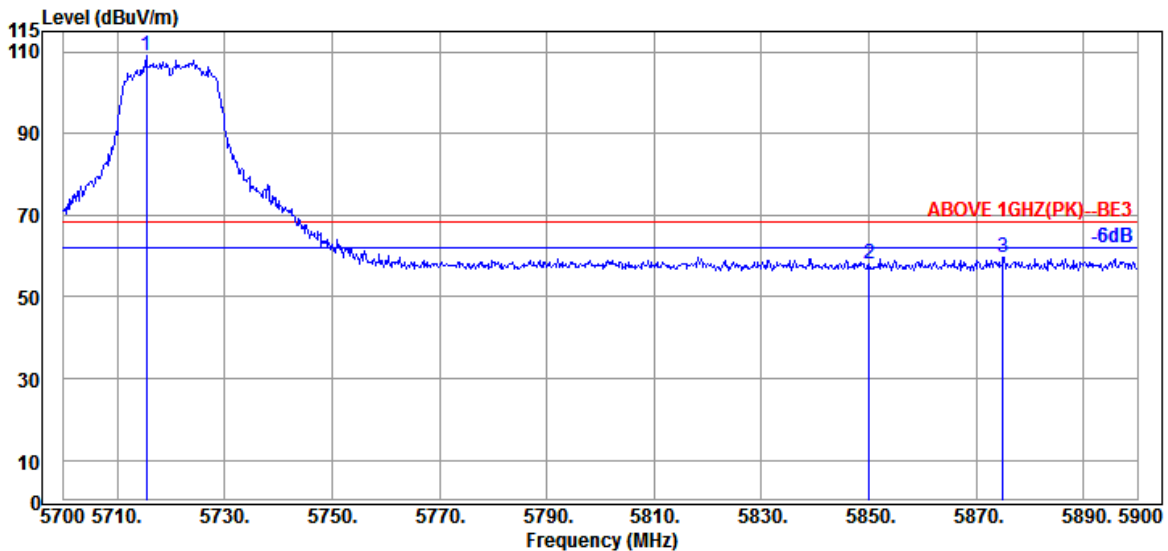


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.400	34.40	9.40	31.74	96.93	108.99	---	---	Peak
5850.000	35.00	9.52	31.80	45.57	58.29	68.20	9.91	Peak
5875.000	35.07	9.55	31.81	46.97	59.78	68.20	8.42	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

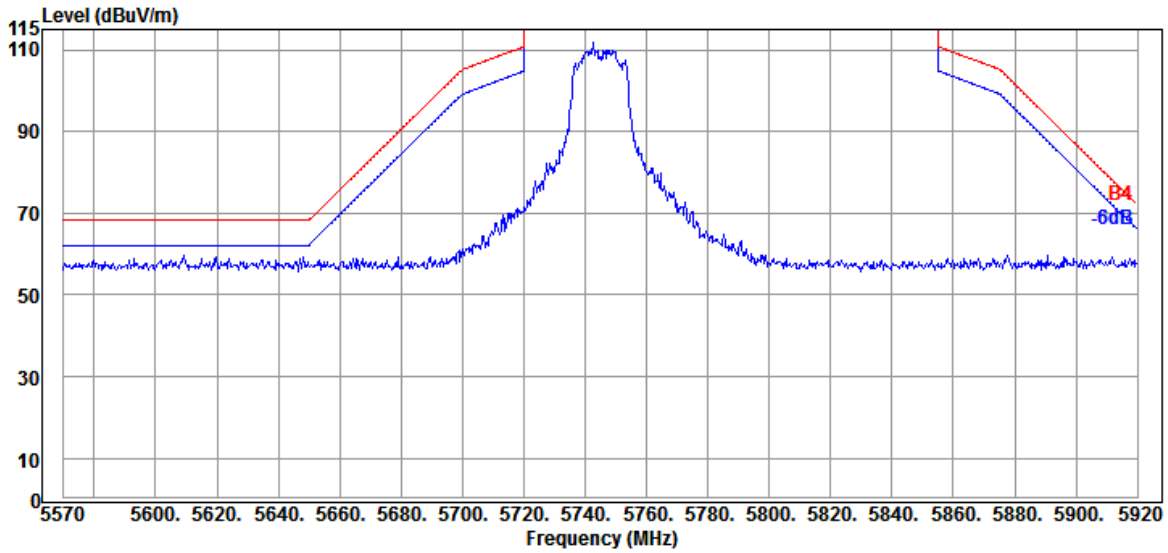


Antenna at Vertical Polarization

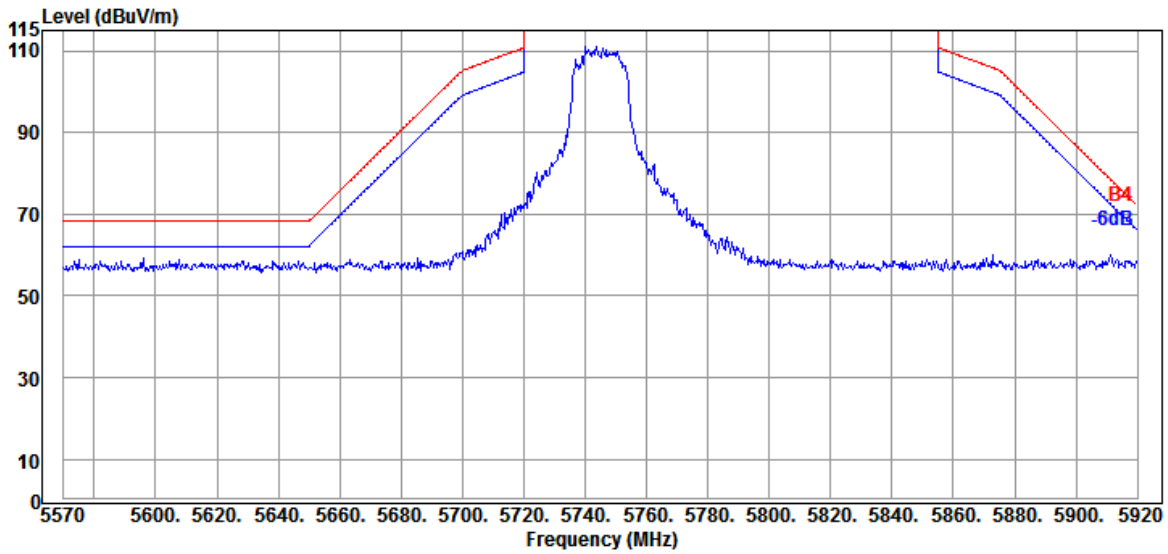


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

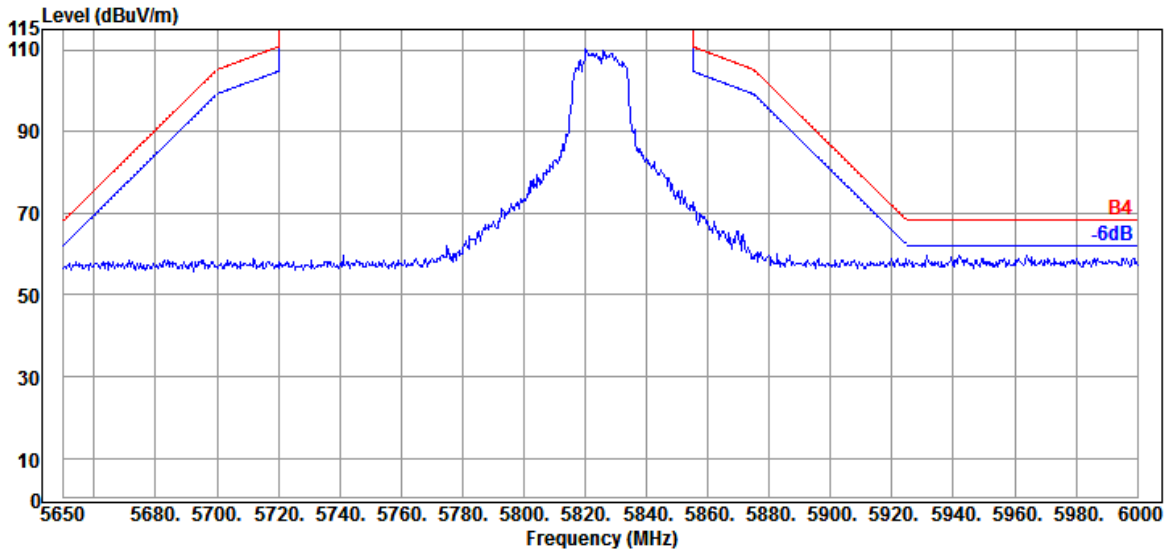

Antenna at Vertical Polarization

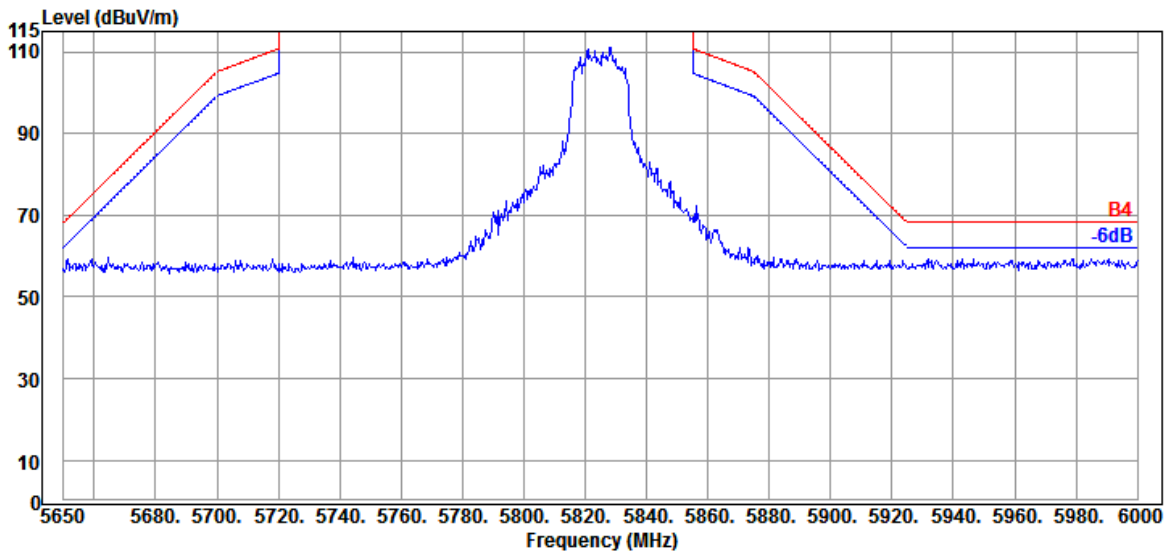


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

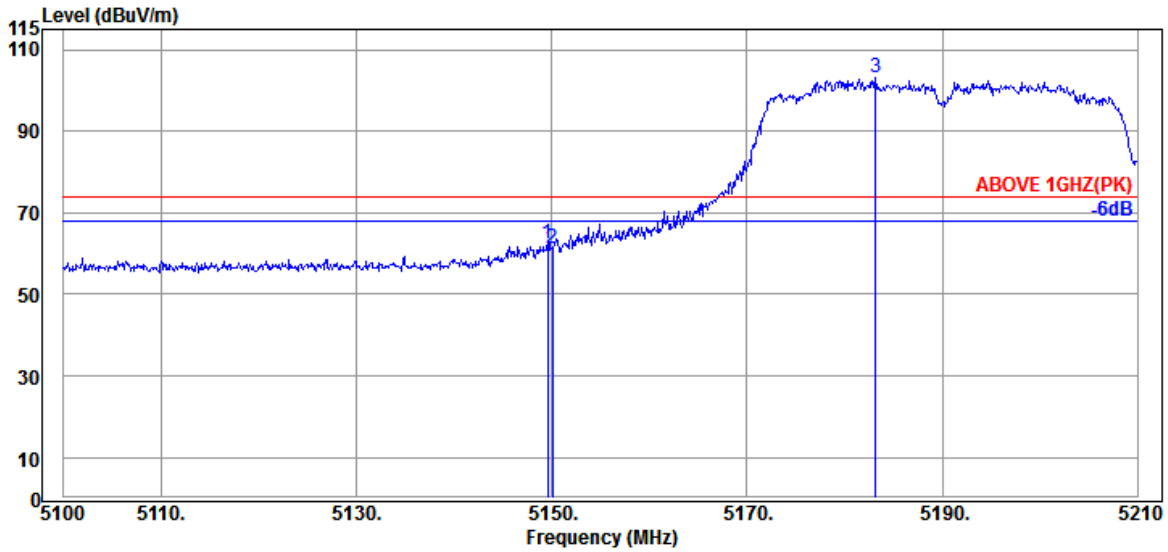

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.10	8.92	31.63	52.01	62.40	74.00	11.60	Peak
5150.050	33.10	8.92	31.63	50.93	61.32	74.00	12.68	Peak
@ 5183.160	33.17	8.95	31.63	92.62	103.11	---	---	Peak

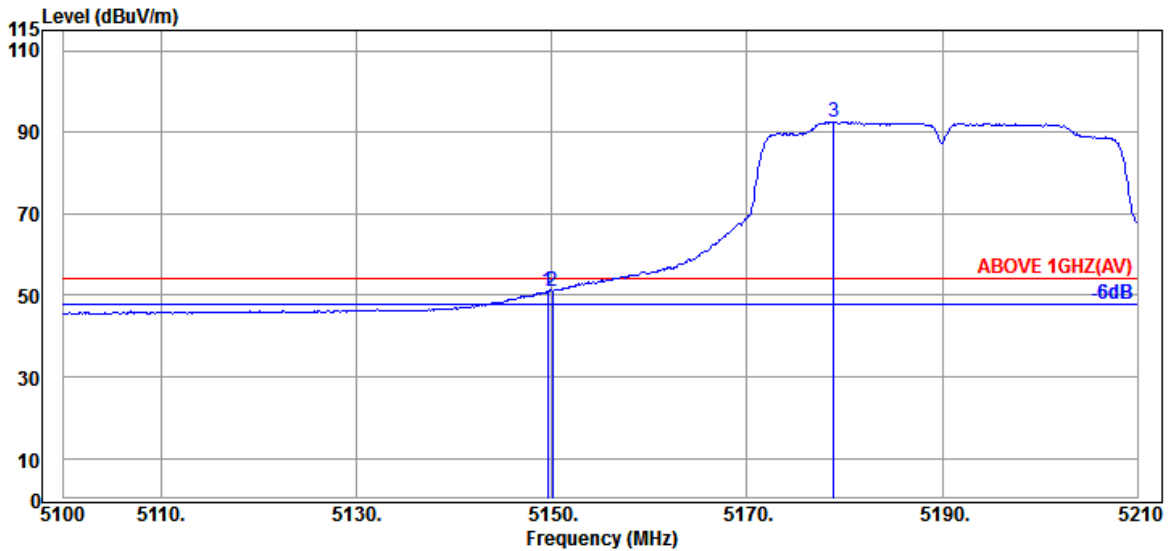


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.10	8.92	31.63	40.65	51.04	54.00	2.96	Average
5150.050	33.10	8.92	31.63	40.69	51.08	54.00	2.92	Average
@ 5178.870	33.17	8.95	31.63	82.00	92.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

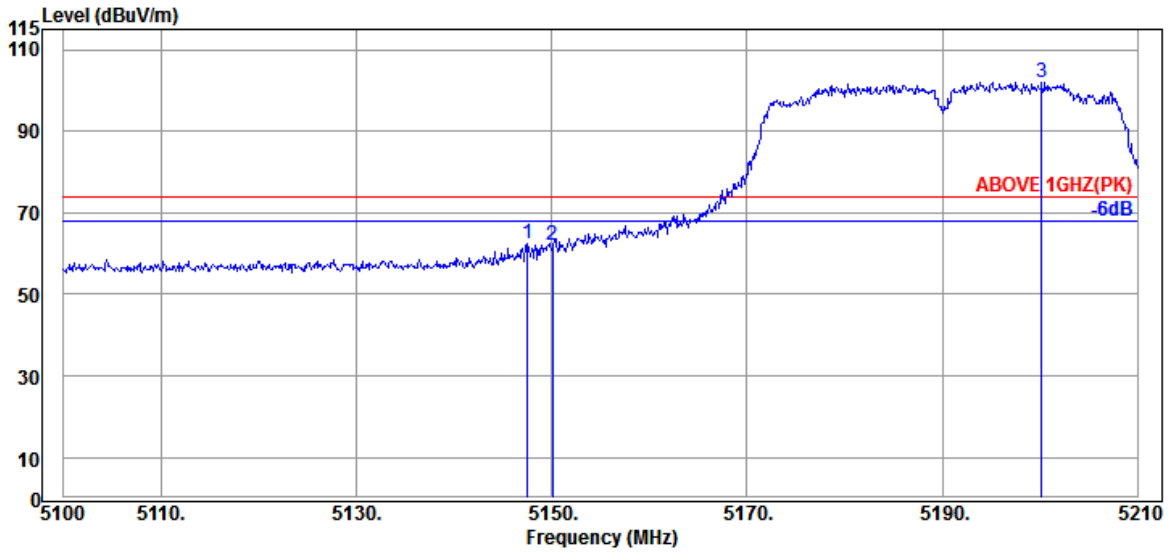

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.520	33.10	8.92	31.63	52.05	62.44	74.00	11.56	Peak
5150.050	33.10	8.92	31.63	51.72	62.11	74.00	11.89	Peak
@ 5200.210	33.20	8.96	31.63	91.60	102.13	---	---	Peak

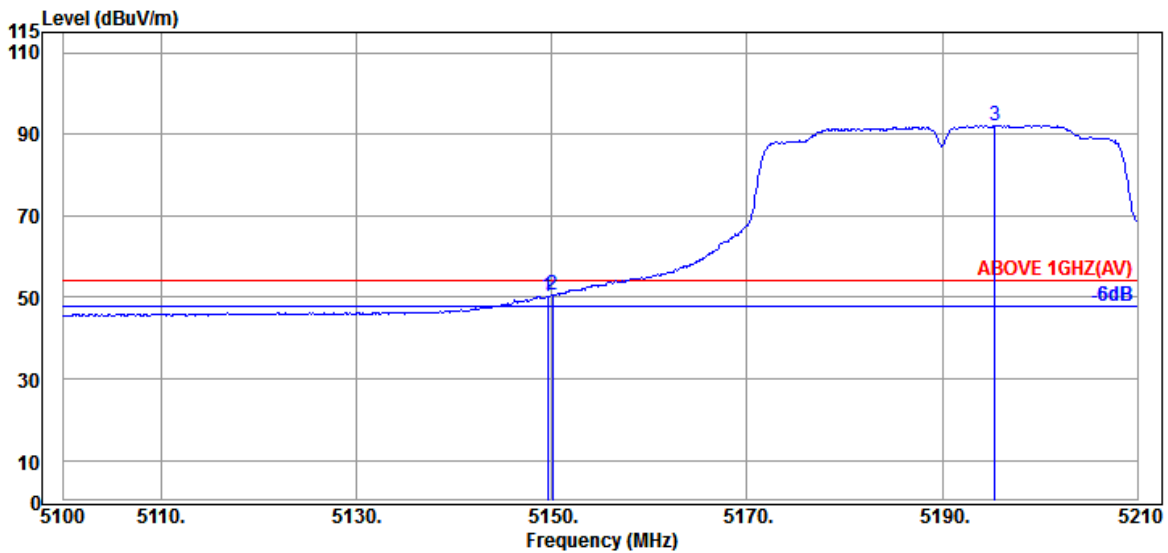


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.10	8.92	31.63	39.95	50.34	54.00	3.66	Average
5150.050	33.10	8.92	31.63	40.27	50.66	54.00	3.34	Average
@ 5195.370	33.20	8.96	31.63	81.72	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

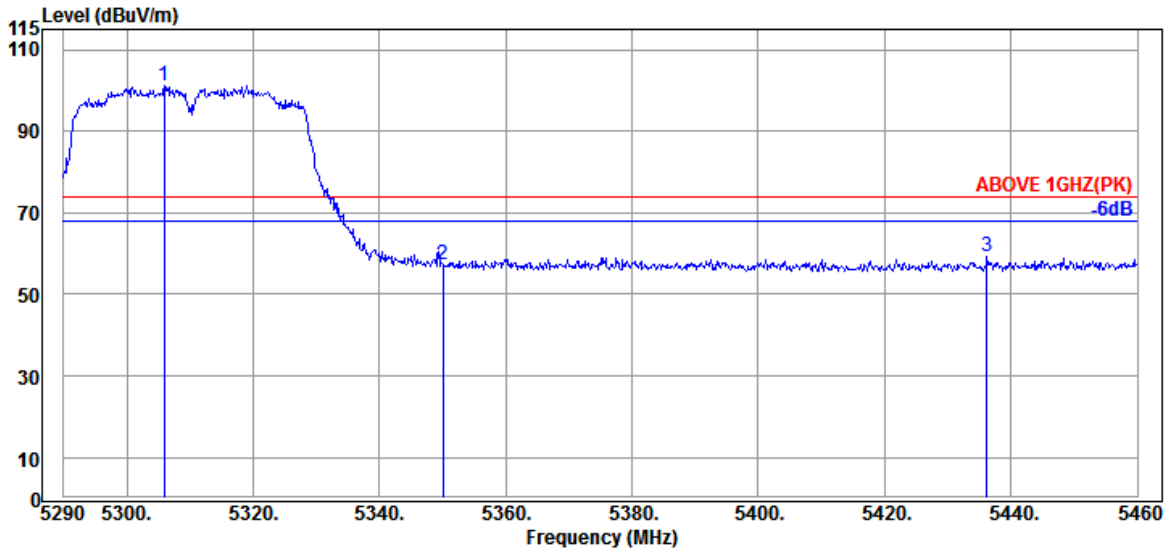

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.980	33.20	9.05	31.63	90.61	101.23	---	---	Peak
5350.010	33.50	9.10	31.63	46.25	57.22	74.00	16.78	Peak
5436.200	33.85	9.17	31.63	47.69	59.08	74.00	14.92	Peak

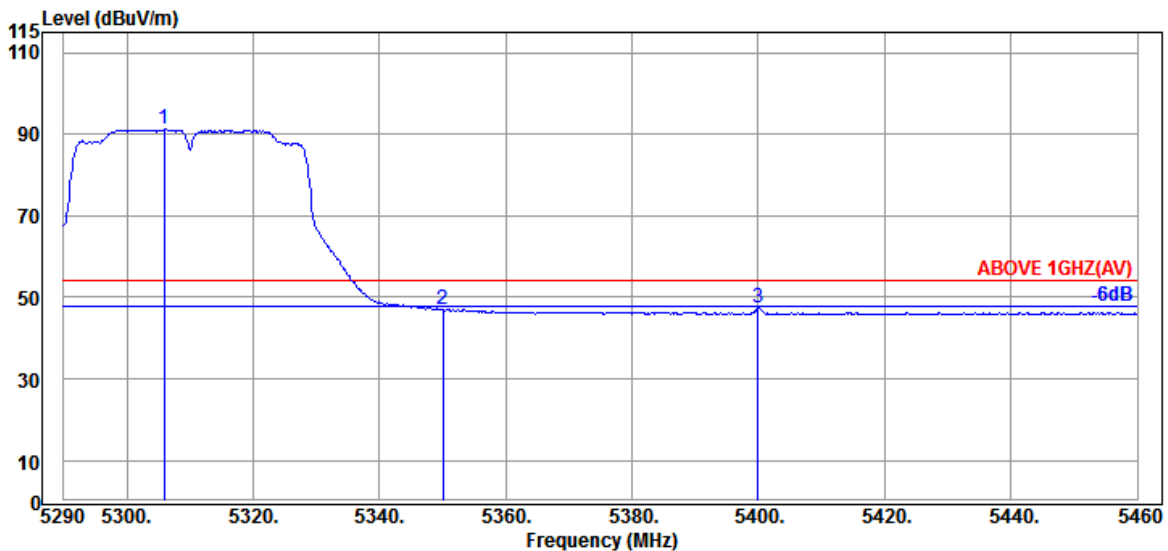


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.980	33.20	9.05	31.63	80.61	91.23	---	---	Average
5350.010	33.50	9.10	31.63	35.87	46.84	54.00	7.16	Average
5399.990	33.70	9.14	31.63	36.33	47.54	54.00	6.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

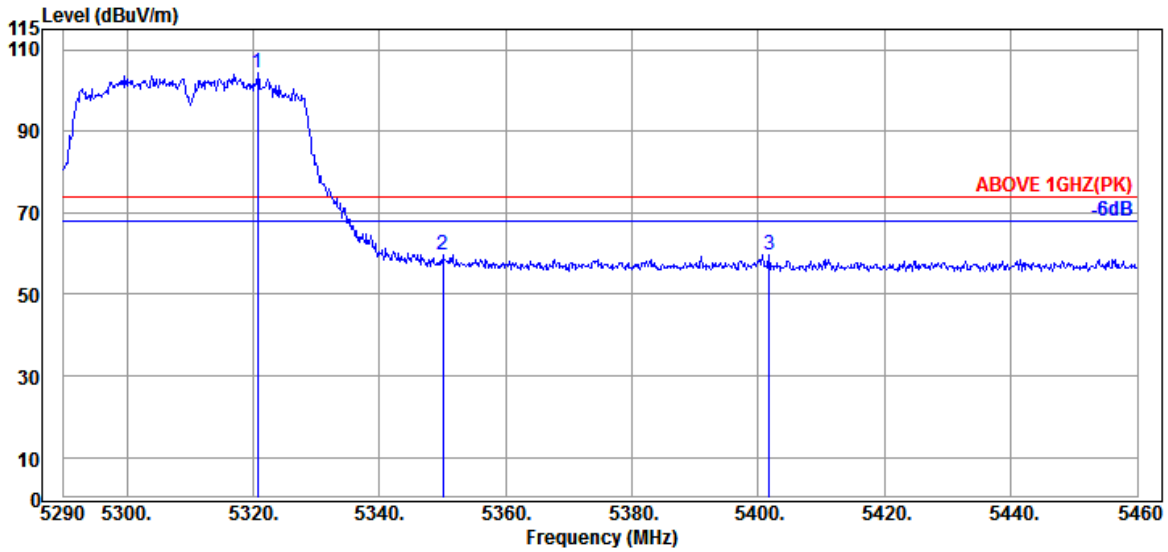

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.770	33.30	9.07	31.63	93.46	104.20	---	---	Peak
5350.010	33.50	9.10	31.63	48.58	59.55	74.00	14.45	Peak
5401.690	33.75	9.14	31.63	48.58	59.84	74.00	14.16	Peak

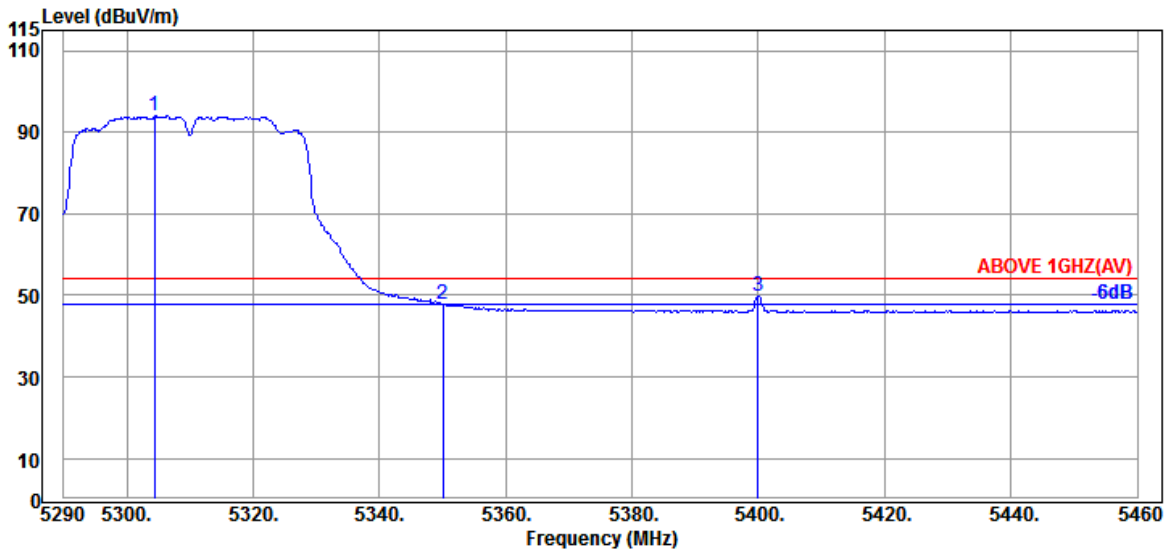


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.450	33.20	9.05	31.63	83.37	93.99	---	---	Average
5350.010	33.50	9.10	31.63	36.75	47.72	54.00	6.28	Average
5399.990	33.70	9.14	31.63	38.72	49.93	54.00	4.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

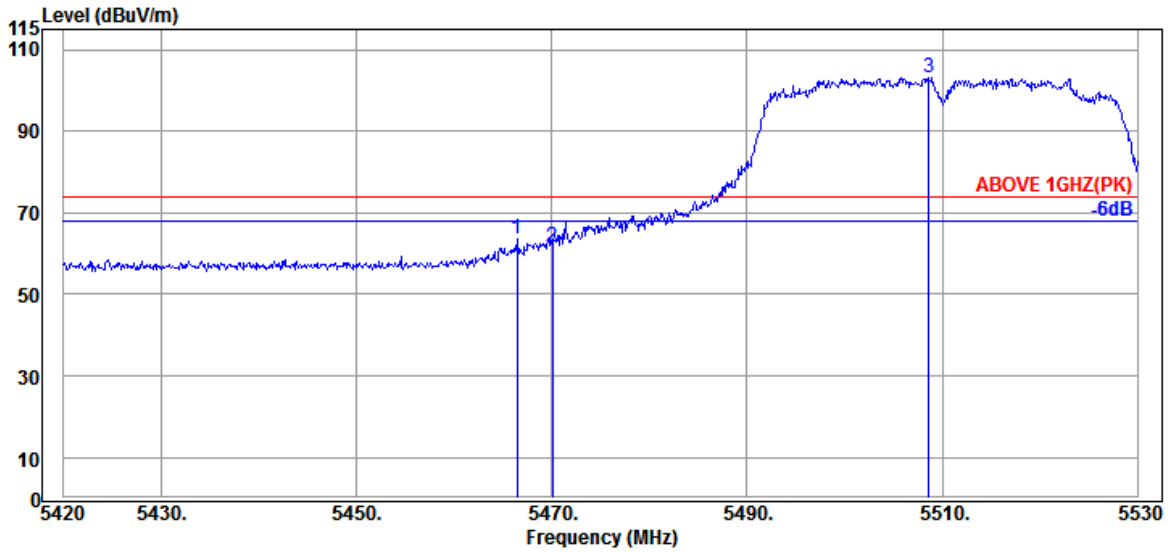

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.420	33.97	9.20	31.63	51.97	63.51	74.00	10.49	Peak
5470.050	33.97	9.20	31.63	49.93	61.47	74.00	12.53	Peak
@ 5508.660	34.10	9.23	31.64	91.56	103.25	---	---	Peak

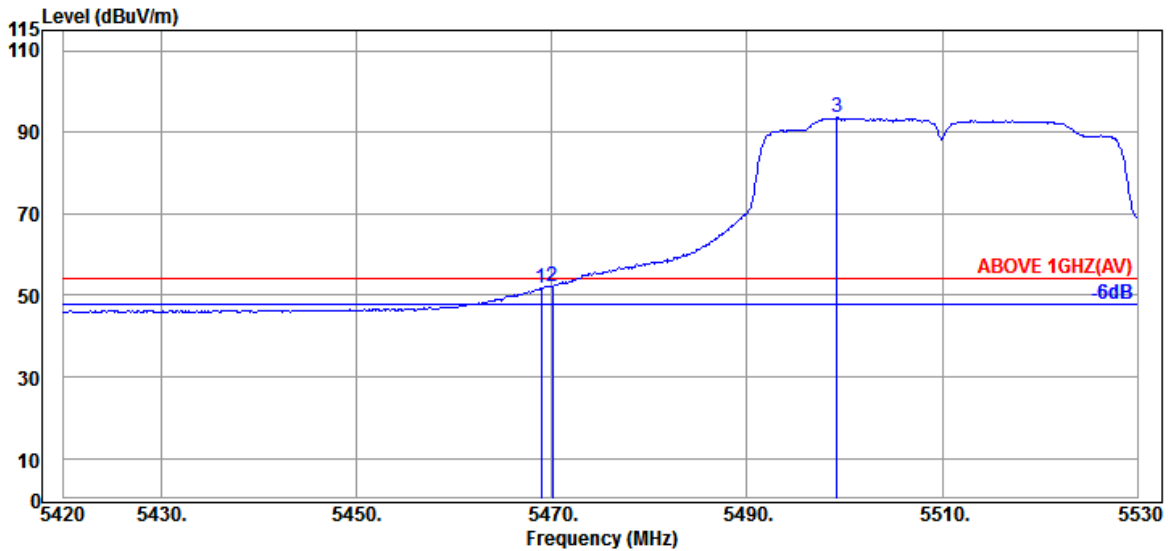


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	33.97	9.20	31.63	40.14	51.68	54.00	2.32	Average
5470.050	33.97	9.20	31.63	40.74	52.28	54.00	1.72	Average
@ 5499.200	34.10	9.23	31.63	81.83	93.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

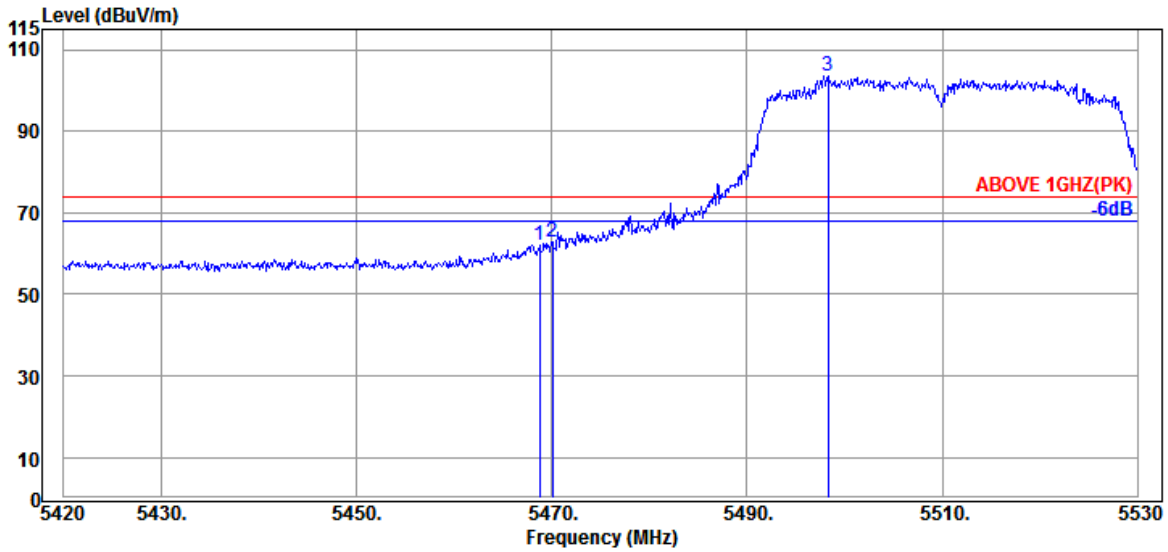

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	33.97	9.20	31.63	50.51	62.05	74.00	11.95	Peak
5470.050	33.97	9.20	31.63	51.21	62.75	74.00	11.25	Peak
@ 5498.320	34.10	9.23	31.63	91.77	103.47	---	---	Peak

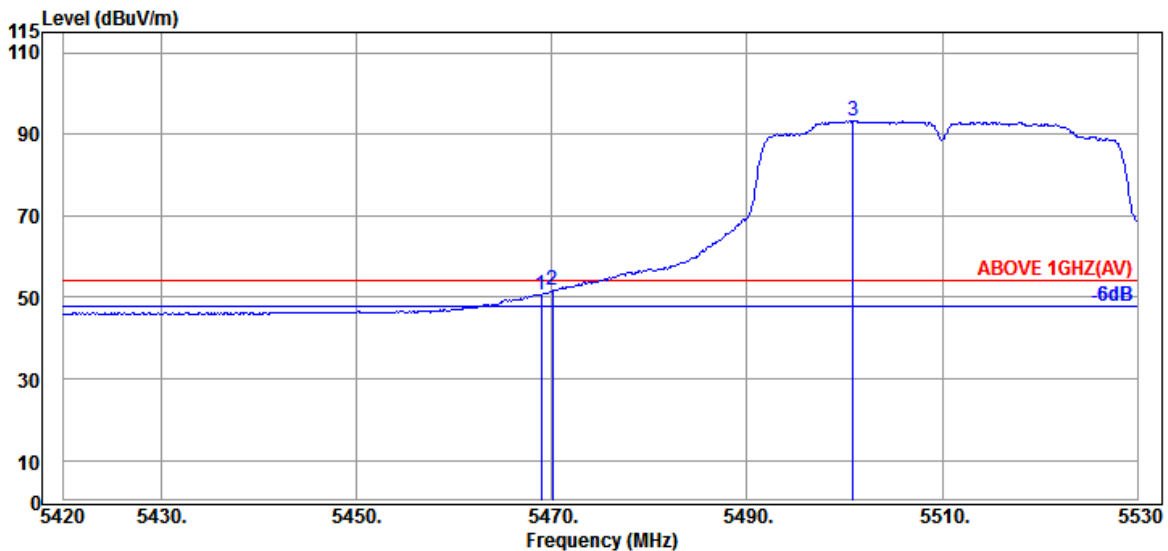


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	33.97	9.20	31.63	39.20	50.74	54.00	3.26	Average
5470.050	33.97	9.20	31.63	40.23	51.77	54.00	2.23	Average
@ 5500.850	34.10	9.23	31.63	81.63	93.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

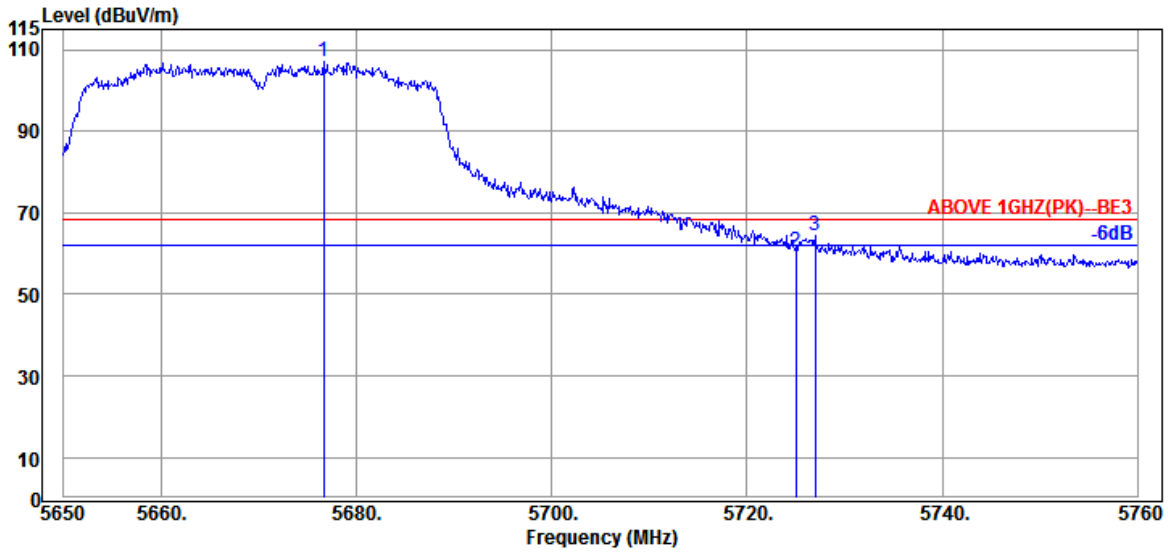

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.620	34.30	9.37	31.72	95.32	107.27	---	---	Peak
5725.020	34.50	9.42	31.74	48.28	60.46	68.20	7.74	Peak
5727.000	34.50	9.42	31.75	52.32	64.49	68.20	3.71	Peak

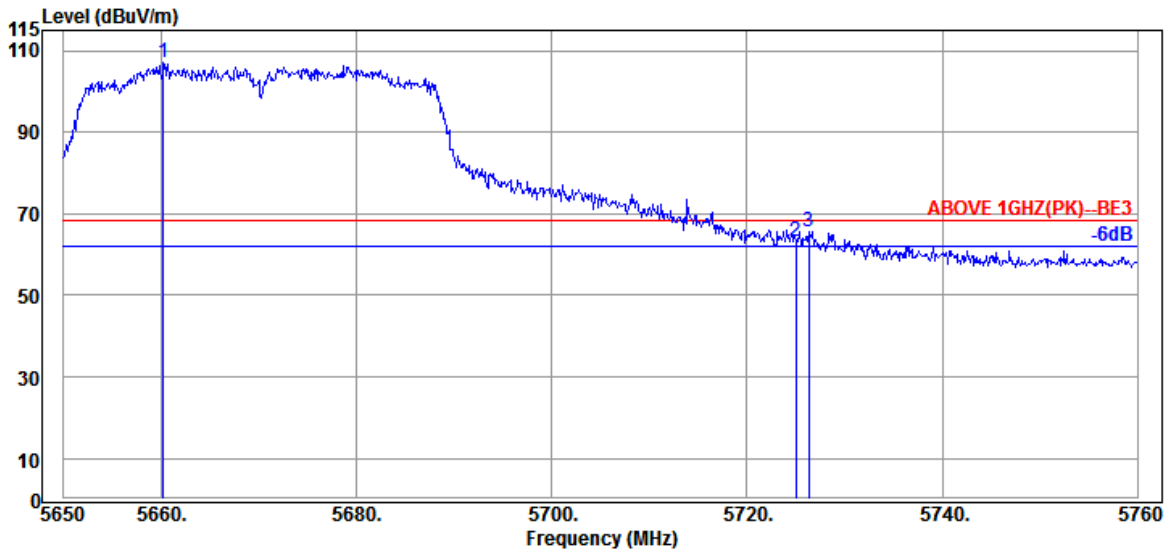


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.230	34.30	9.36	31.71	95.09	107.04	---	---	Peak
5725.020	34.50	9.42	31.74	51.00	63.18	68.20	5.02	Peak
5726.340	34.50	9.42	31.74	53.60	65.78	68.20	2.42	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

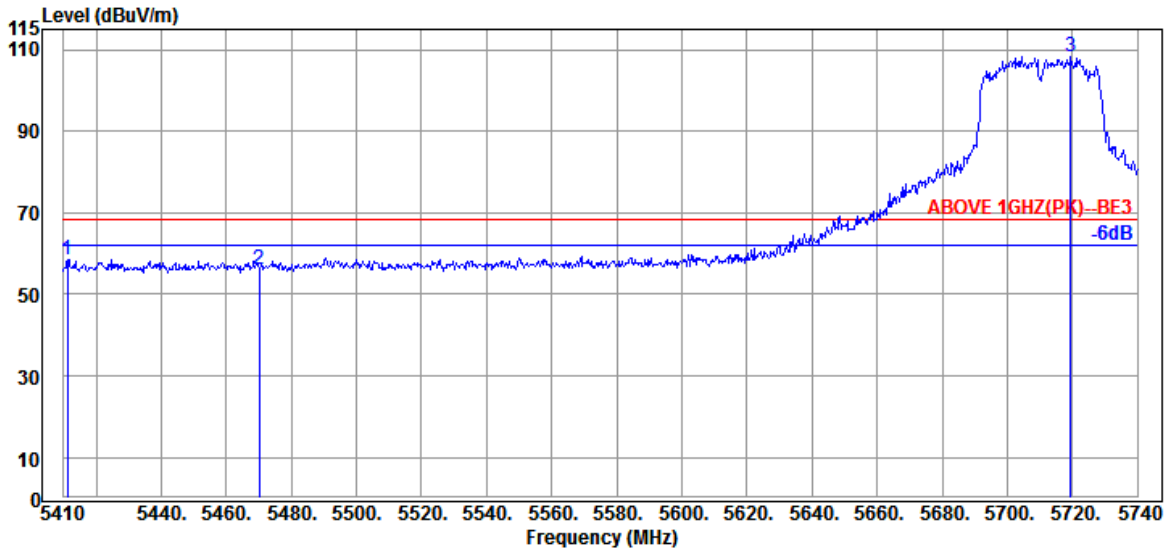

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.320	33.75	9.14	31.63	47.39	58.65	68.20	9.55	Peak
5470.060	33.97	9.20	31.63	44.62	56.16	68.20	12.04	Peak
@ 5719.540	34.40	9.42	31.74	96.28	108.36	---	---	Peak

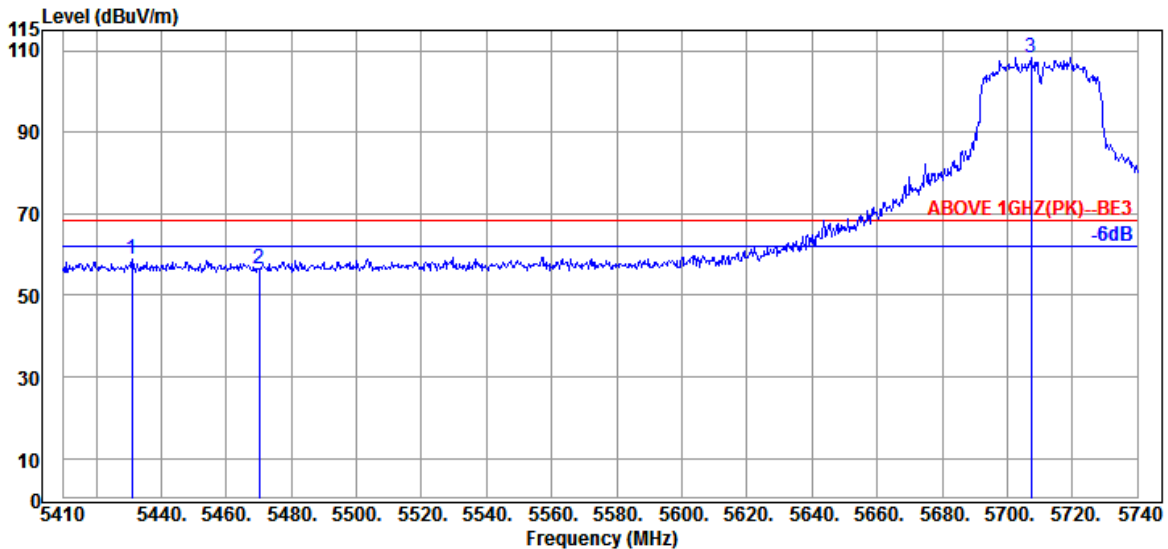


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.120	33.80	9.17	31.63	47.37	58.71	68.20	9.49	Peak
5470.060	33.97	9.20	31.63	44.99	56.53	68.20	11.67	Peak
@ 5707.330	34.40	9.40	31.73	96.30	108.37	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

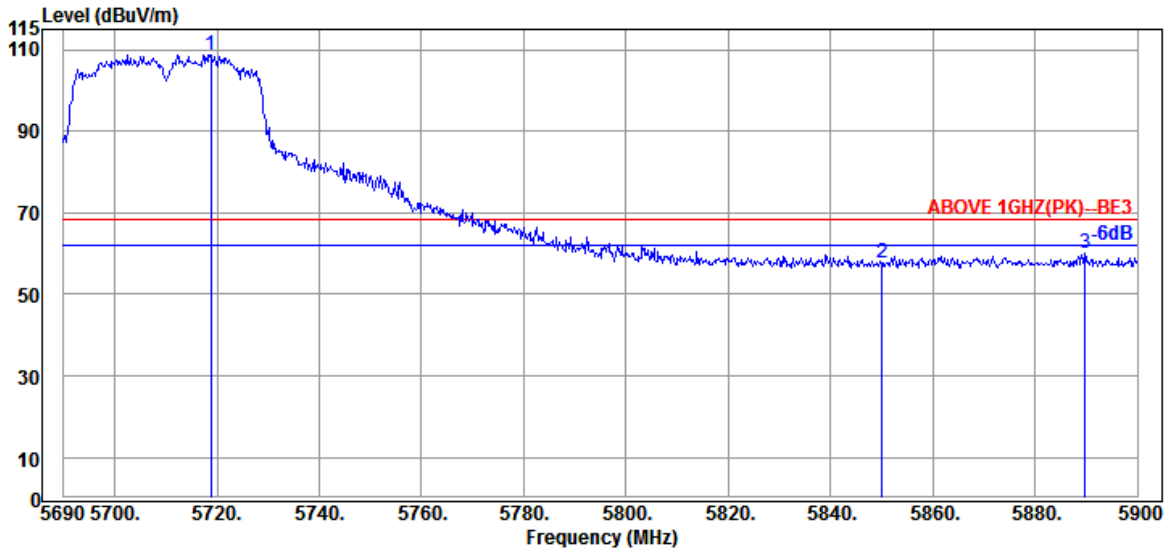

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.770	34.40	9.42	31.74	96.70	108.78	---	---	Peak
5850.020	35.00	9.52	31.80	45.03	57.75	68.20	10.45	Peak
5889.710	35.07	9.56	31.82	47.40	60.21	68.20	7.99	Peak

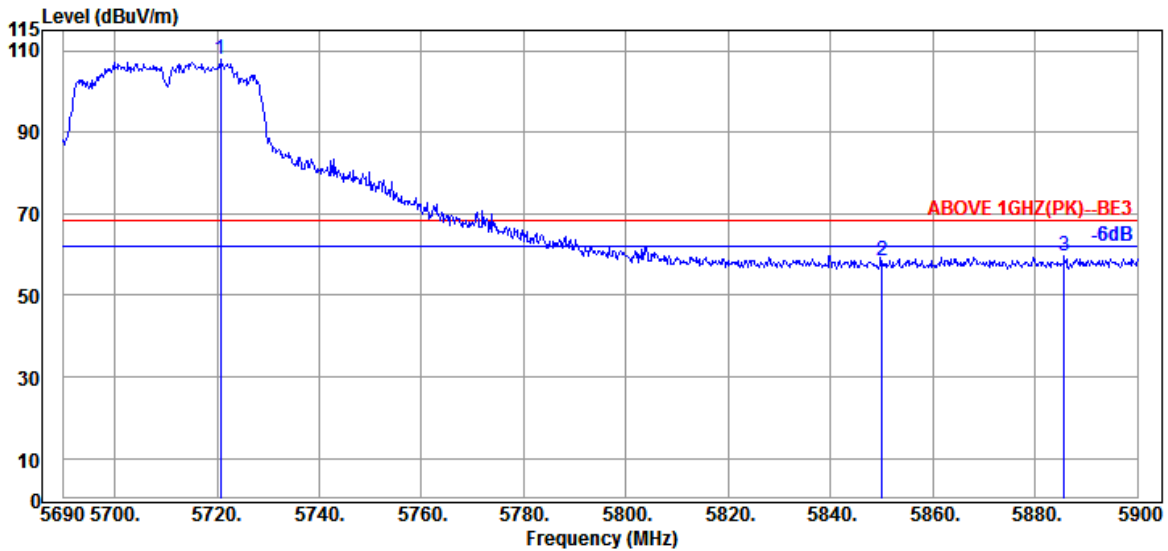


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.660	34.40	9.42	31.74	95.97	108.05	---	---	Peak
5850.020	35.00	9.52	31.80	45.67	58.39	68.20	9.81	Peak
5885.720	35.07	9.55	31.82	46.85	59.65	68.20	8.55	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

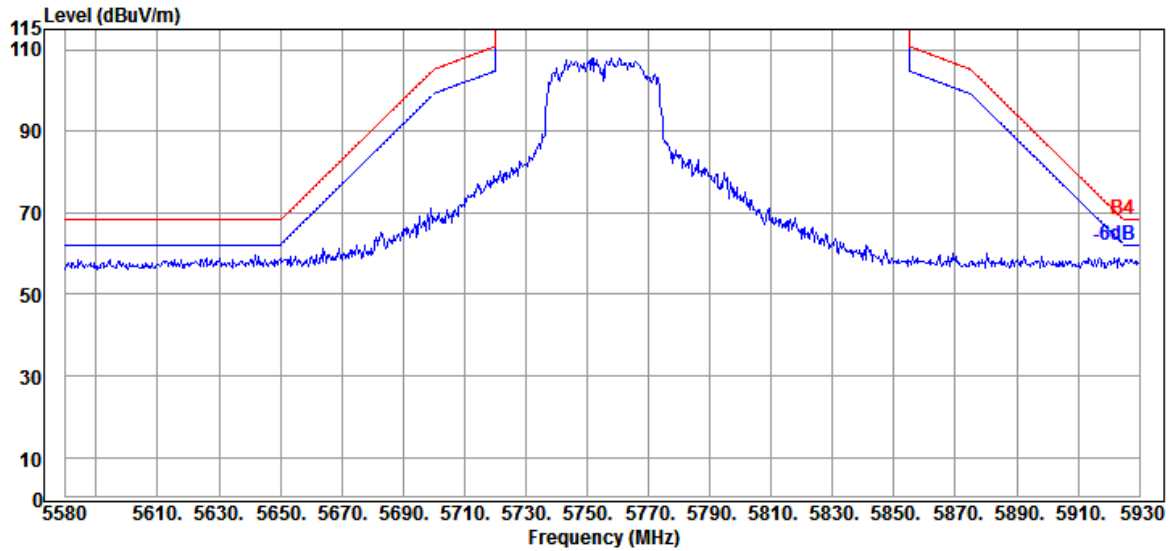


Antenna at Vertical Polarization

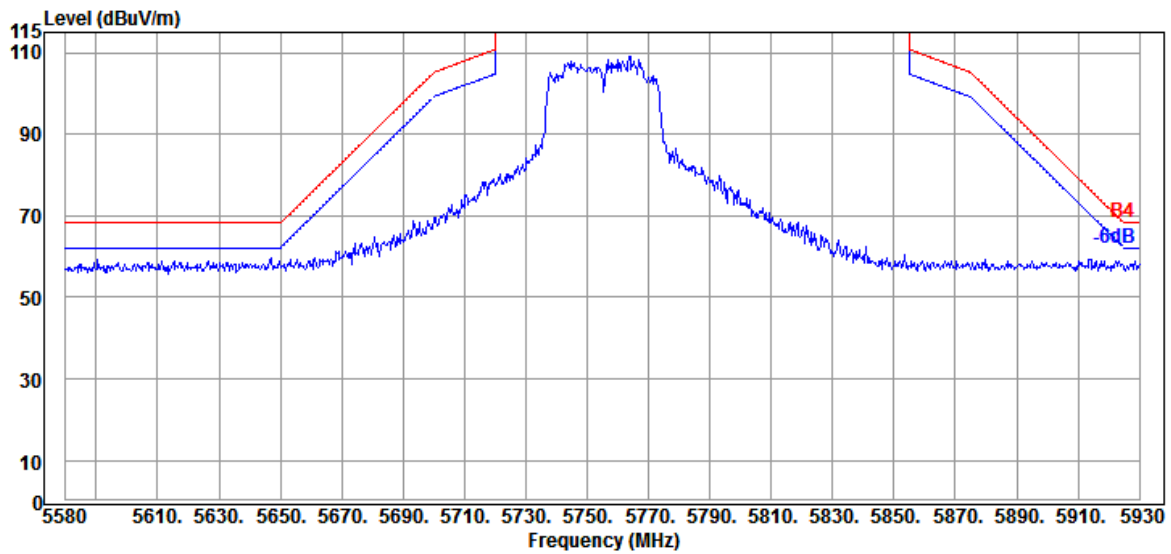


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

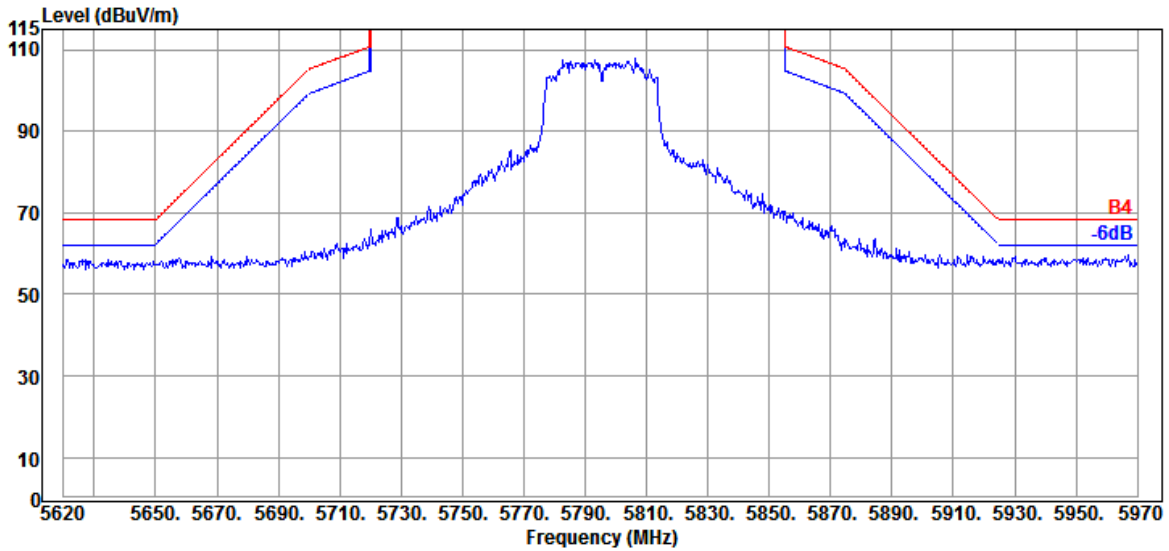

Antenna at Vertical Polarization

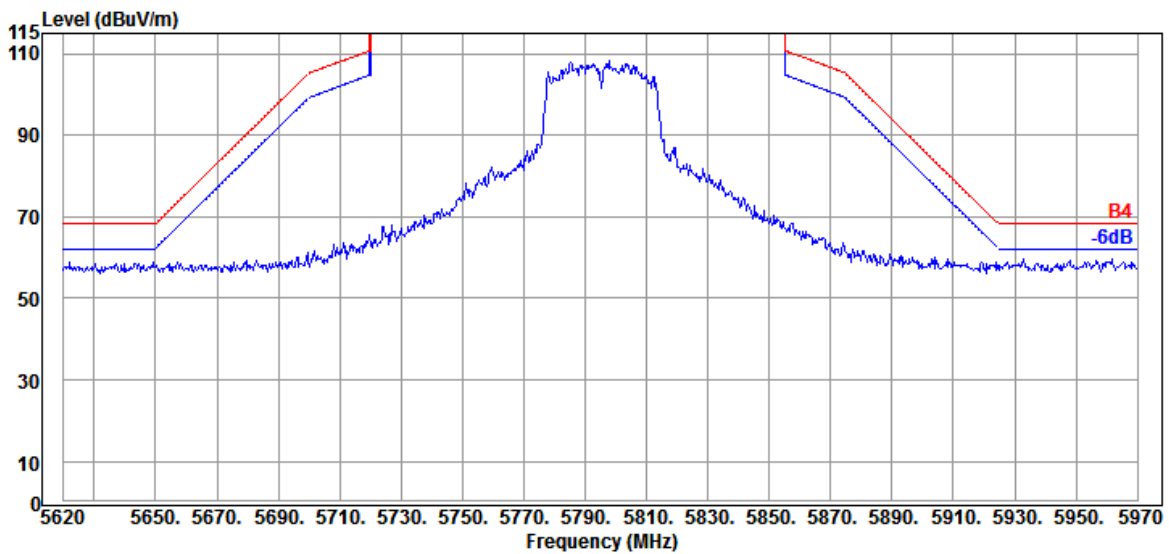


Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

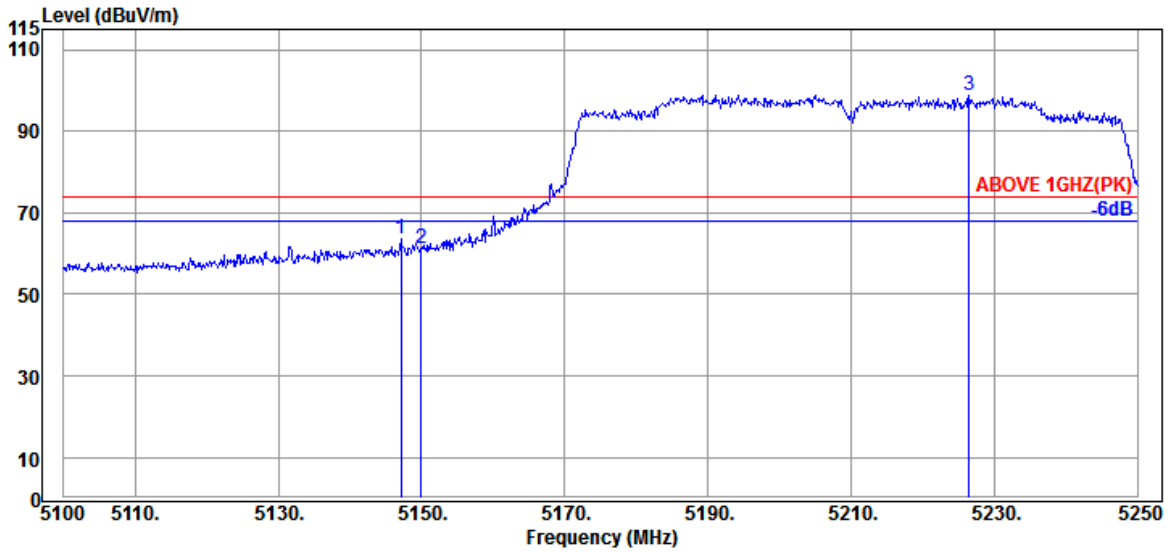

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.10	8.92	31.63	53.07	63.46	74.00	10.54	Peak
5149.950	33.10	8.92	31.63	51.00	61.39	74.00	12.61	Peak
@ 5226.450	33.15	8.99	31.63	88.33	98.84	---	---	Peak

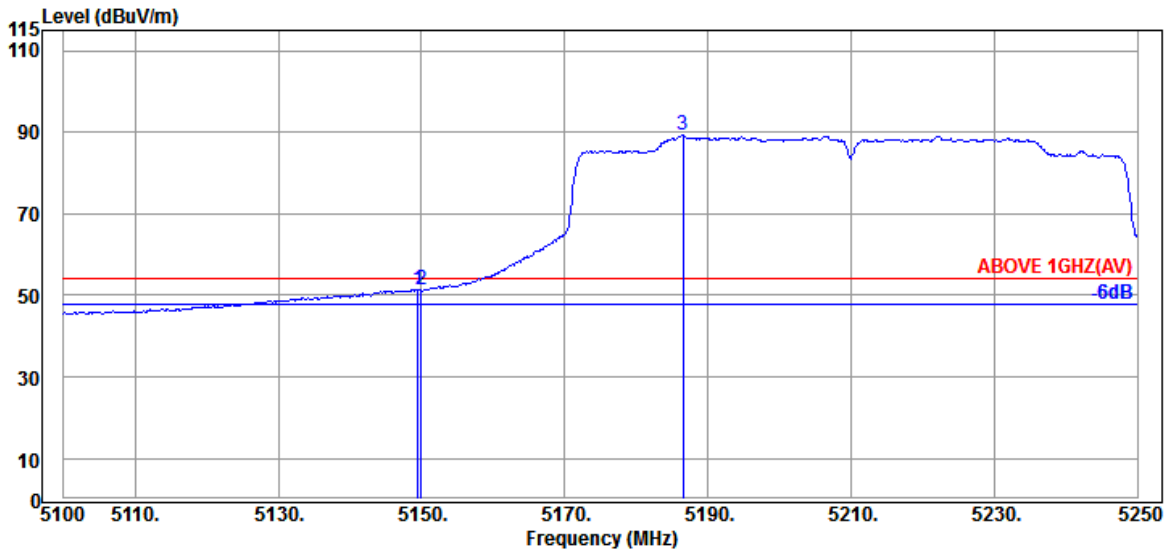


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	41.07	51.46	54.00	2.54	Average
5149.950	33.10	8.92	31.63	40.95	51.34	54.00	2.66	Average
@ 5186.550	33.20	8.95	31.63	78.66	89.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

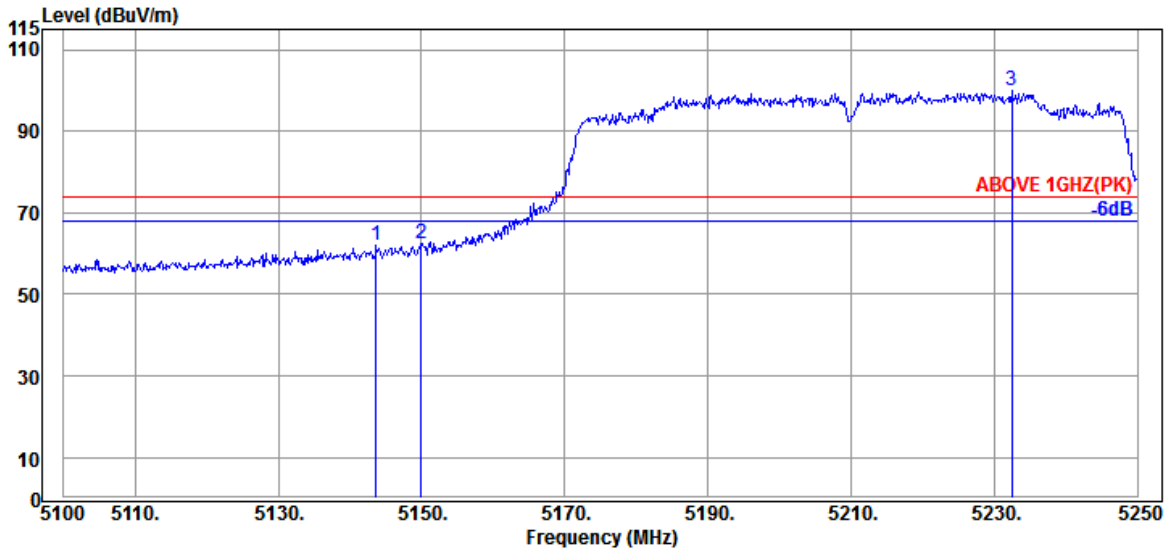

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.650	33.10	8.92	31.63	51.67	62.06	74.00	11.94	Peak
5149.950	33.10	8.92	31.63	52.18	62.57	74.00	11.43	Peak
@ 5232.450	33.12	8.99	31.63	89.50	99.98	---	---	Peak

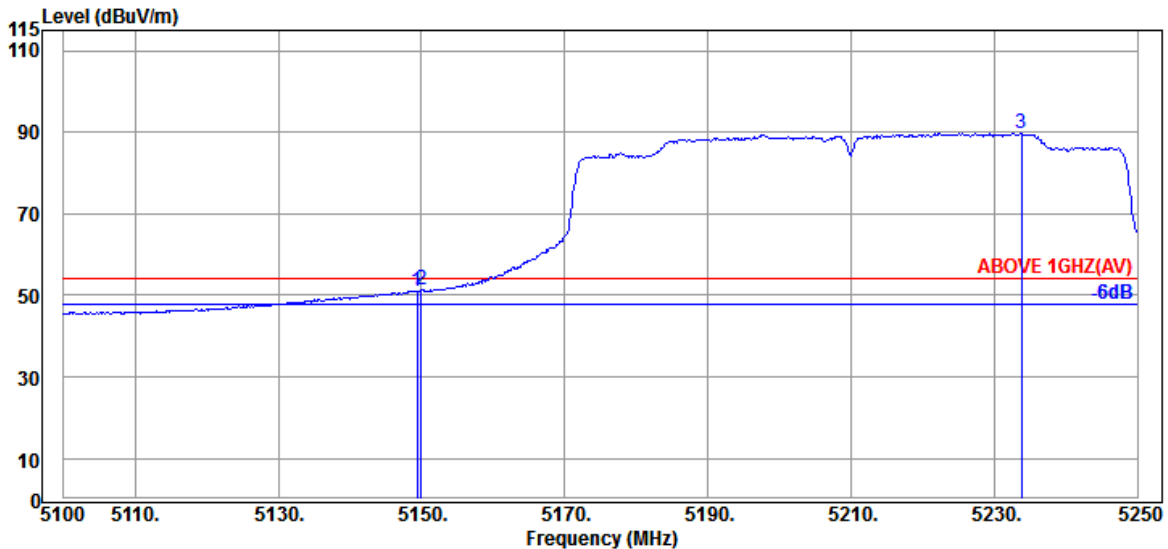


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	33.10	8.92	31.63	40.61	51.00	54.00	3.00	Average
5149.950	33.10	8.92	31.63	40.81	51.20	54.00	2.80	Average
@ 5233.800	33.12	8.99	31.63	79.18	89.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

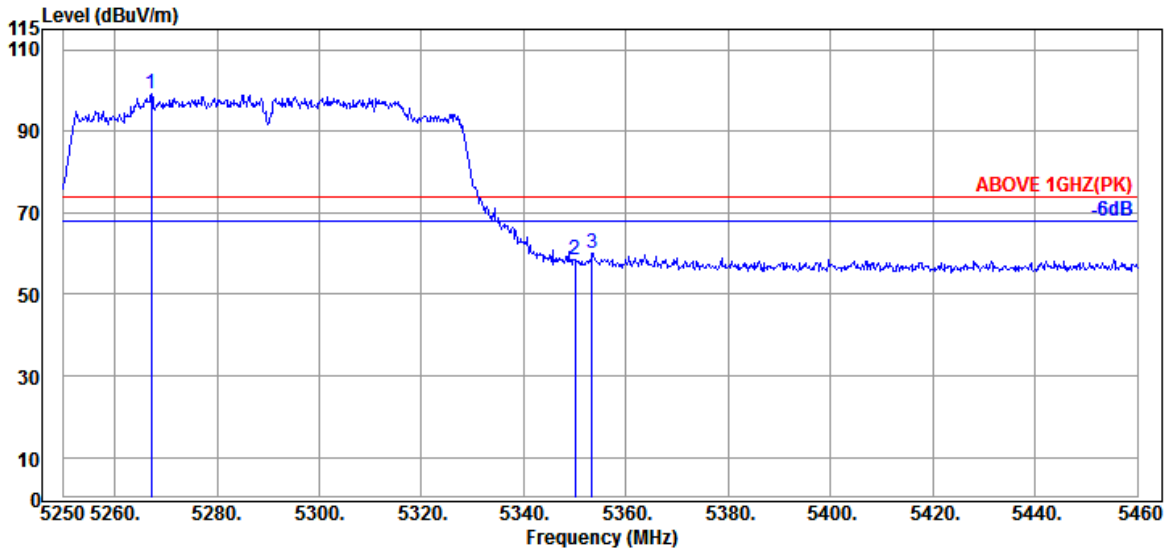

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.220	33.13	9.02	31.63	88.81	99.33	---	---	Peak
5349.960	33.50	9.10	31.63	47.34	58.31	74.00	15.69	Peak
5353.320	33.50	9.10	31.63	49.02	59.99	74.00	14.01	Peak

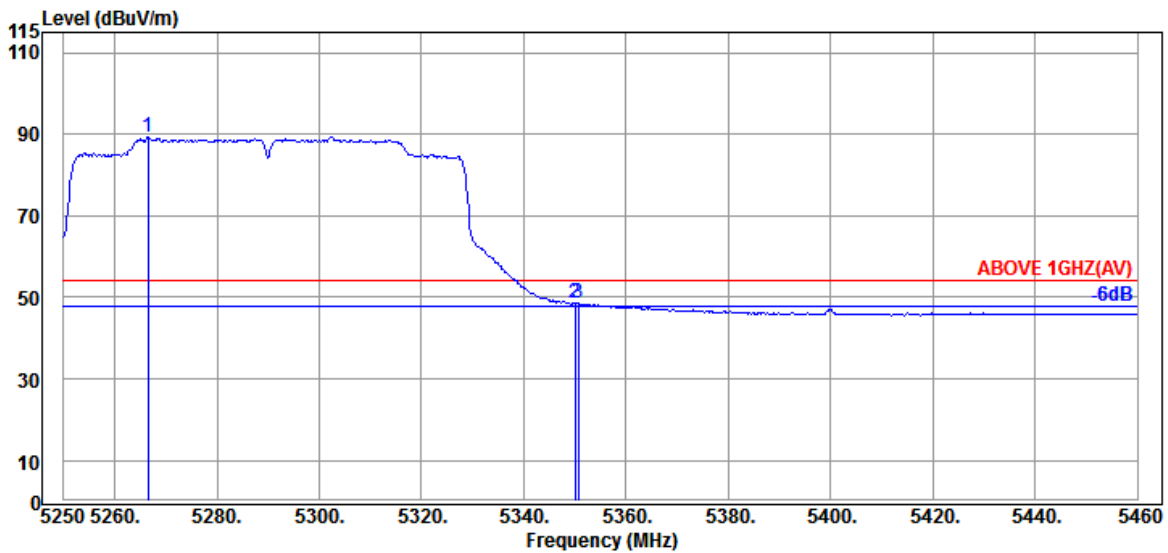


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.590	33.13	9.02	31.63	78.91	89.43	---	---	Average
5349.960	33.50	9.10	31.63	37.48	48.45	54.00	5.55	Average
5350.590	33.50	9.10	31.63	37.61	48.58	54.00	5.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

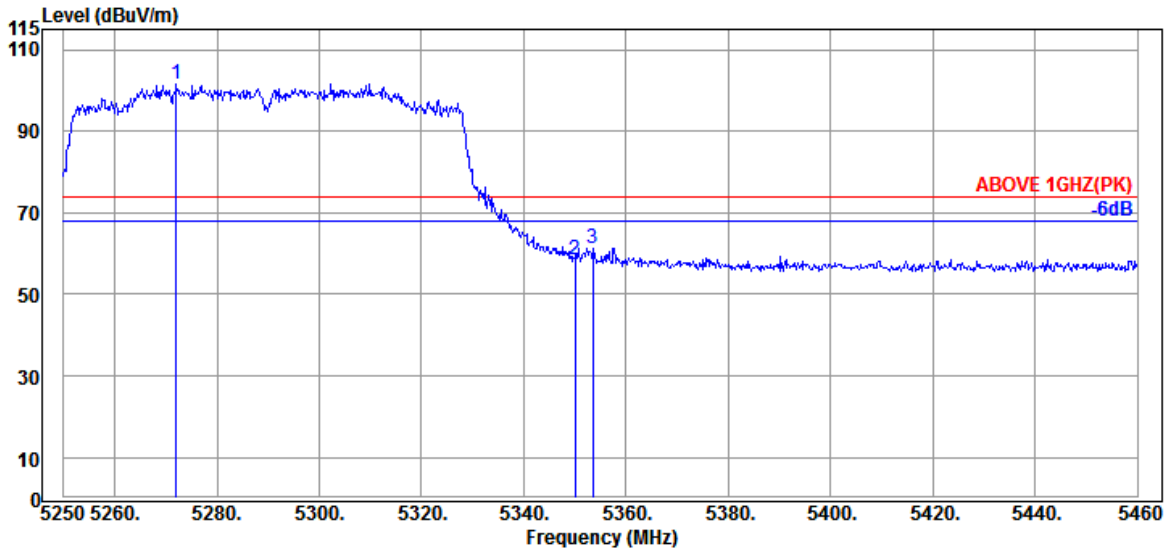

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.050	33.13	9.02	31.63	91.04	101.56	---	---	Peak
5349.960	33.50	9.10	31.63	47.56	58.53	74.00	15.47	Peak
5353.530	33.50	9.10	31.63	50.44	61.41	74.00	12.59	Peak

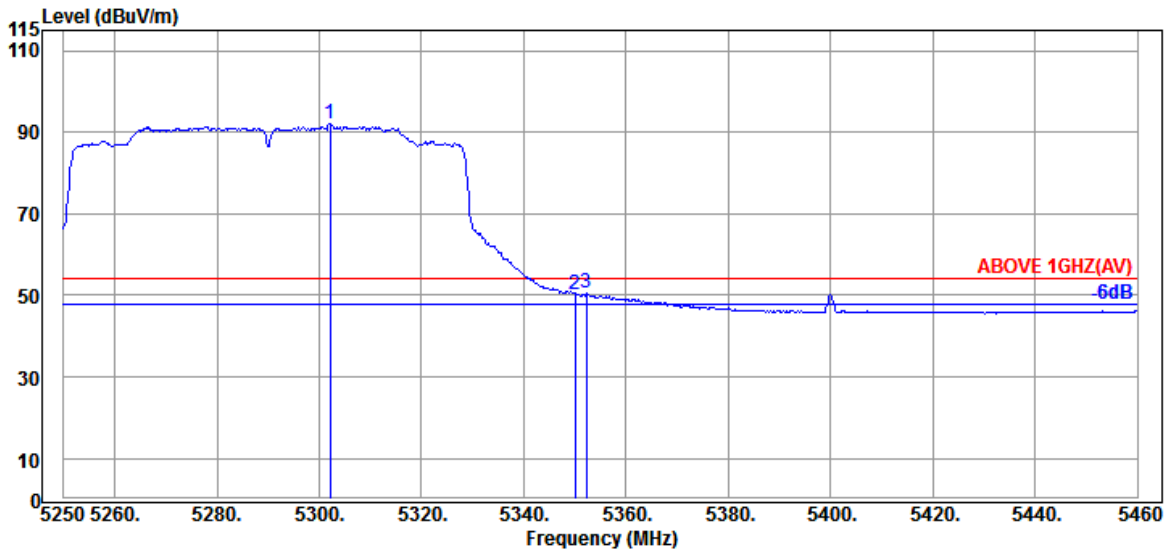


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.080	33.20	9.05	31.63	81.47	92.09	---	---	Average
5349.960	33.50	9.10	31.63	39.34	50.31	54.00	3.69	Average
5352.270	33.50	9.10	31.63	39.56	50.53	54.00	3.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

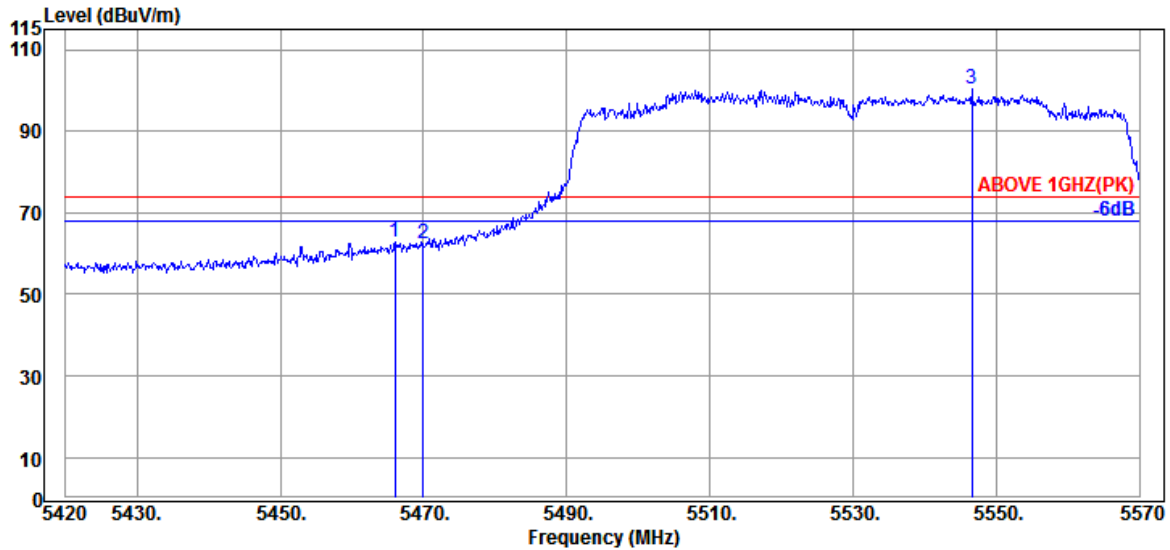

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.050	33.97	9.20	31.63	51.36	62.90	74.00	11.10	Peak
5469.950	33.97	9.20	31.63	50.72	62.26	74.00	11.74	Peak
@ 5546.600	34.20	9.26	31.66	88.47	100.27	---	---	Peak

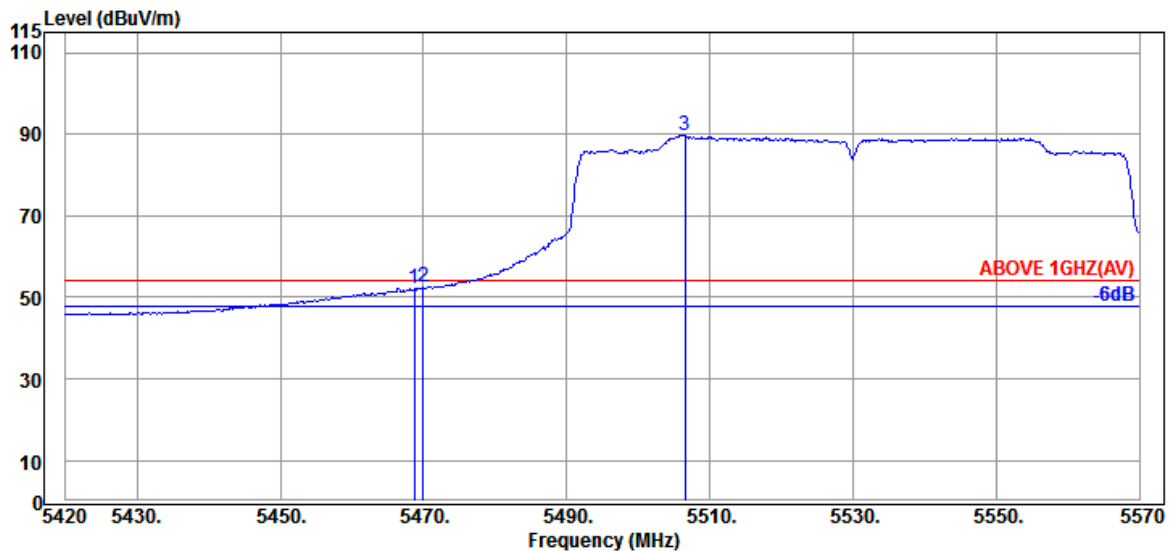


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	33.97	9.20	31.63	40.49	52.03	54.00	1.97	Average
5469.950	33.97	9.20	31.63	40.82	52.36	54.00	1.64	Average
@ 5506.550	34.10	9.23	31.64	78.12	89.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

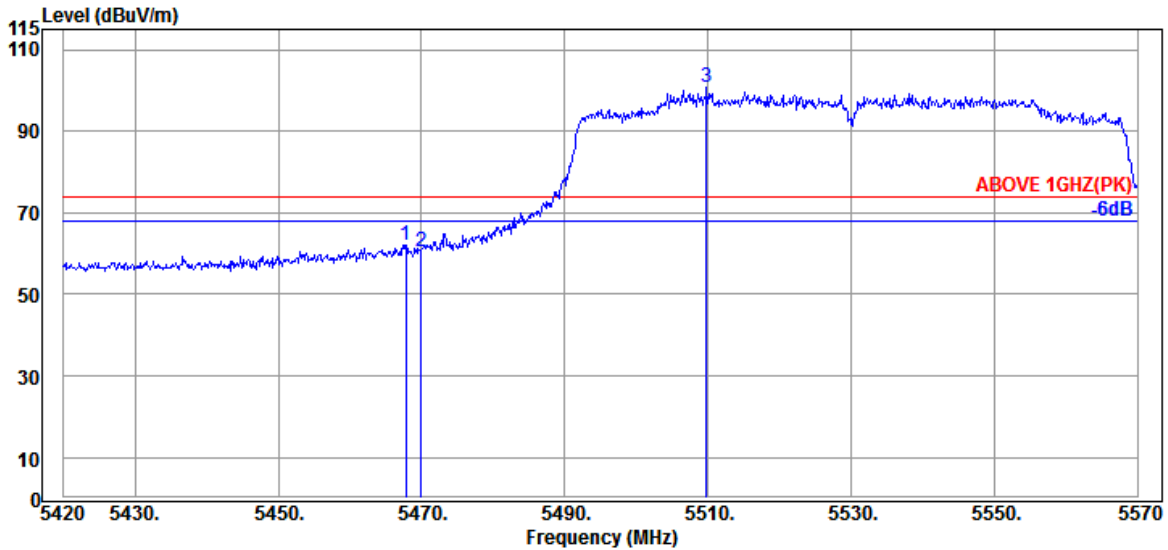

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	33.97	9.20	31.63	50.64	62.18	74.00	11.82	Peak
5469.950	33.97	9.20	31.63	49.01	60.55	74.00	13.45	Peak
@ 5509.850	34.10	9.23	31.64	88.97	100.66	---	---	Peak

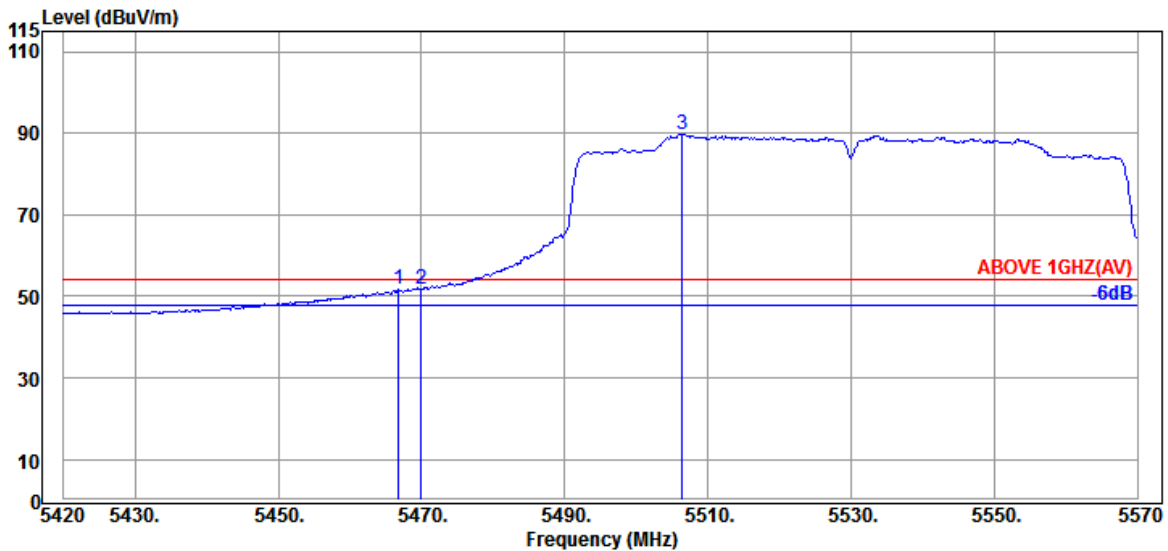


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	33.97	9.20	31.63	40.17	51.71	54.00	2.29	Average
5469.950	33.97	9.20	31.63	40.31	51.85	54.00	2.15	Average
@ 5506.400	34.10	9.23	31.64	78.08	89.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

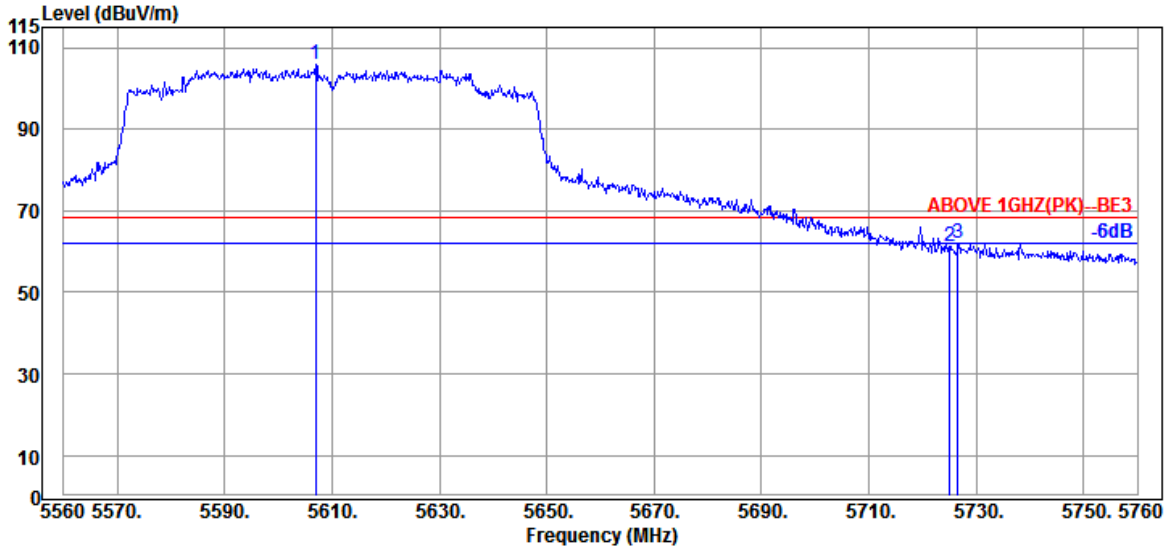

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.000	34.20	9.31	31.68	93.97	105.80	---	---	Peak
5725.000	34.50	9.42	31.74	49.19	61.37	68.20	6.83	Peak
5726.600	34.50	9.42	31.75	49.84	62.01	68.20	6.19	Peak

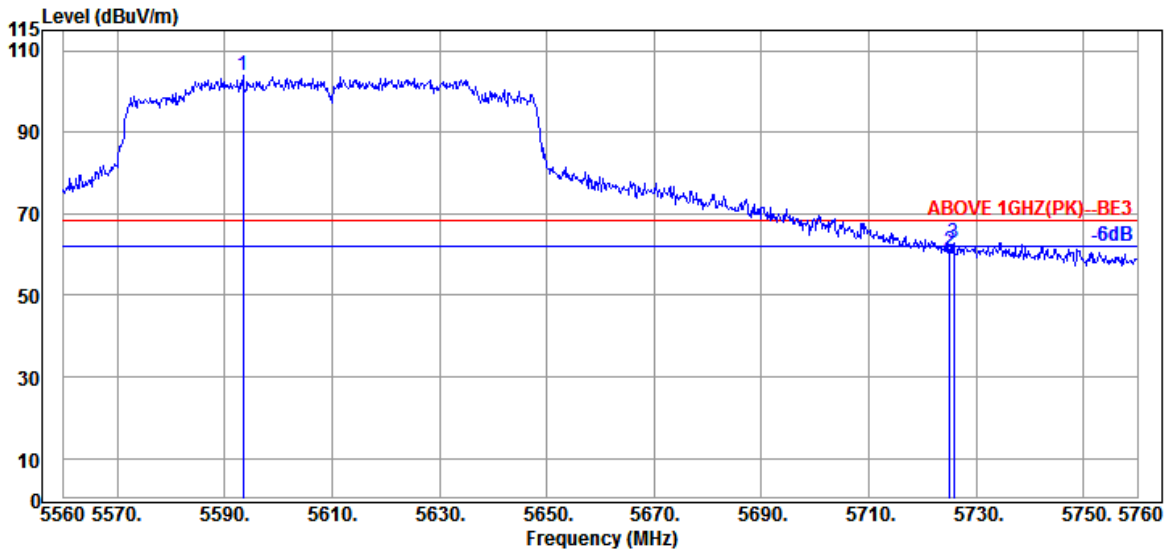


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.400	34.20	9.30	31.67	92.23	104.06	---	---	Peak
5725.000	34.50	9.42	31.74	48.77	60.95	68.20	7.25	Peak
5725.800	34.50	9.42	31.74	50.80	62.98	68.20	5.22	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

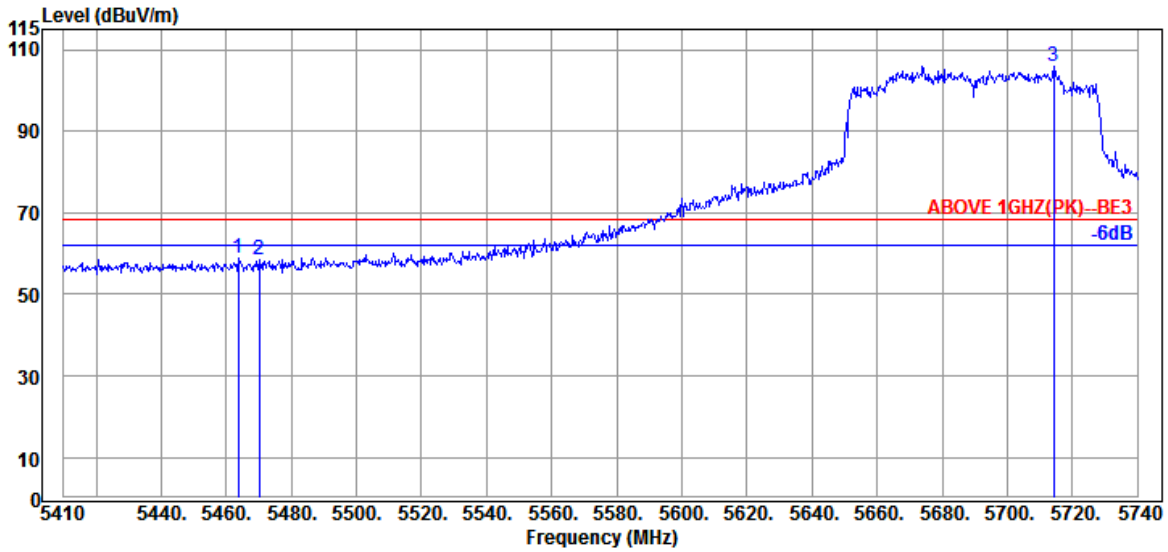

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	33.97	9.20	31.63	47.20	58.74	68.20	9.46	Peak
5470.060	33.97	9.20	31.63	46.91	58.45	68.20	9.75	Peak
@ 5714.260	34.40	9.40	31.74	93.82	105.88	---	---	Peak

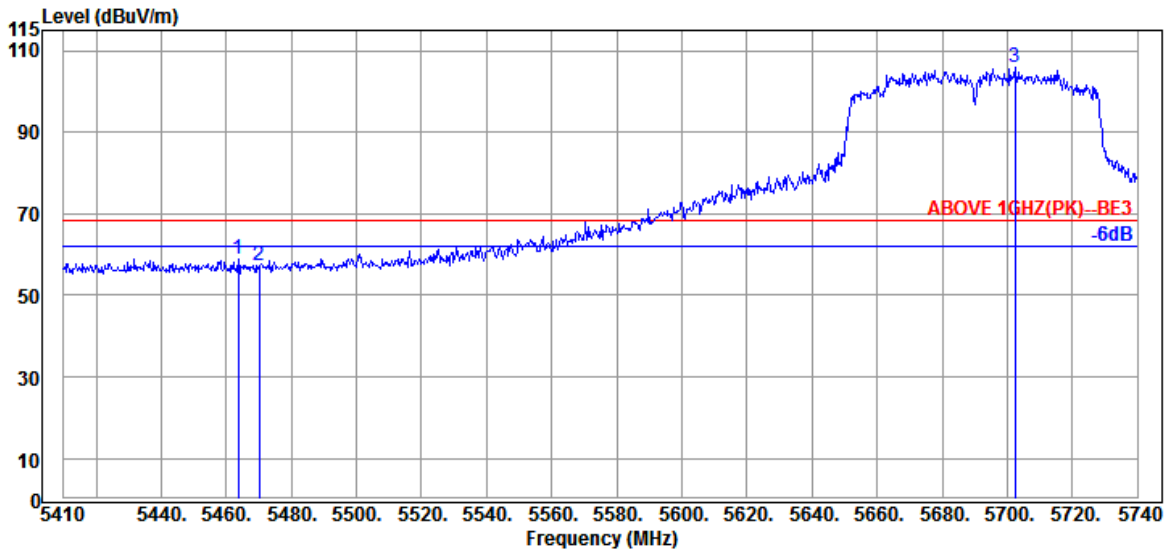


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	33.97	9.20	31.63	47.32	58.86	68.20	9.34	Peak
5470.060	33.97	9.20	31.63	45.71	57.25	68.20	10.95	Peak
@ 5702.380	34.30	9.40	31.73	94.12	106.09	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

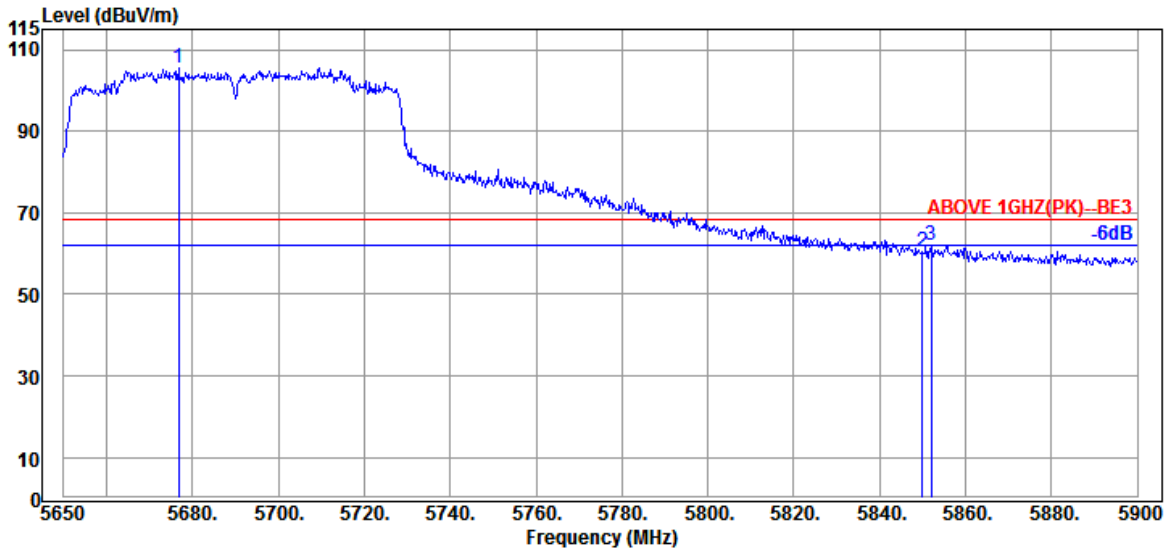

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.750	34.30	9.37	31.72	93.46	105.41	---	---	Peak
5850.000	35.00	9.52	31.80	47.68	60.40	68.20	7.80	Peak
5852.000	35.00	9.52	31.80	49.20	61.92	68.20	6.28	Peak

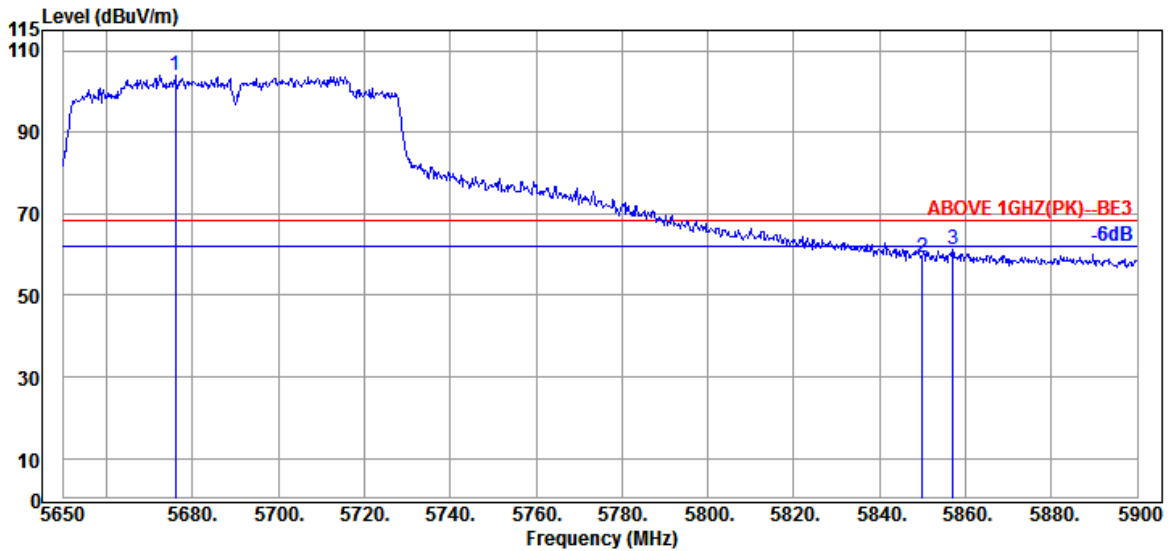


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.000	34.30	9.37	31.72	91.93	103.88	---	---	Peak
5850.000	35.00	9.52	31.80	46.56	59.28	68.20	8.92	Peak
5857.000	35.03	9.53	31.80	48.32	61.08	68.20	7.12	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

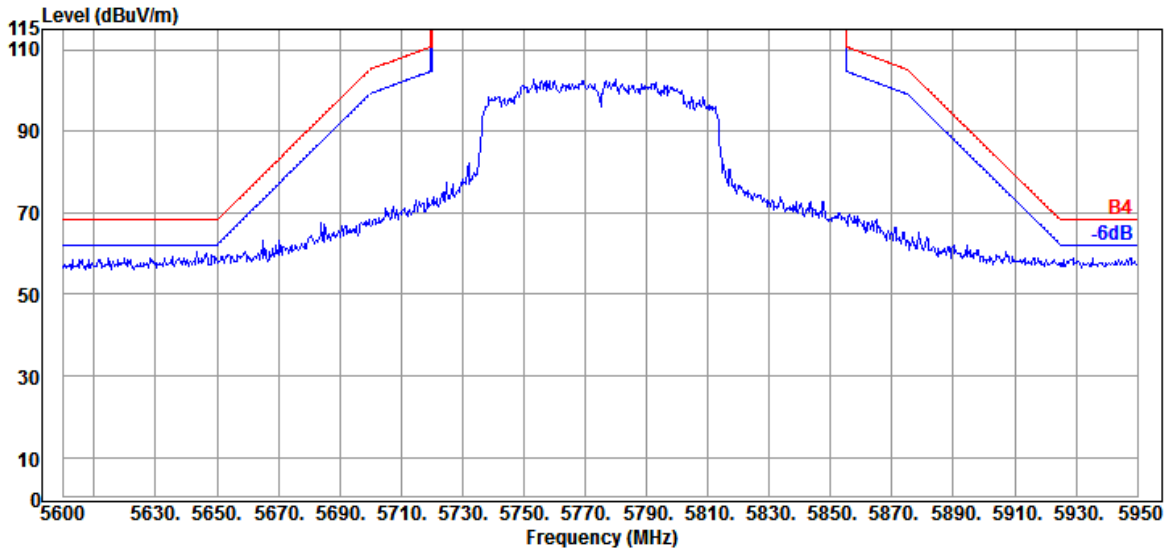

Antenna at Vertical Polarization

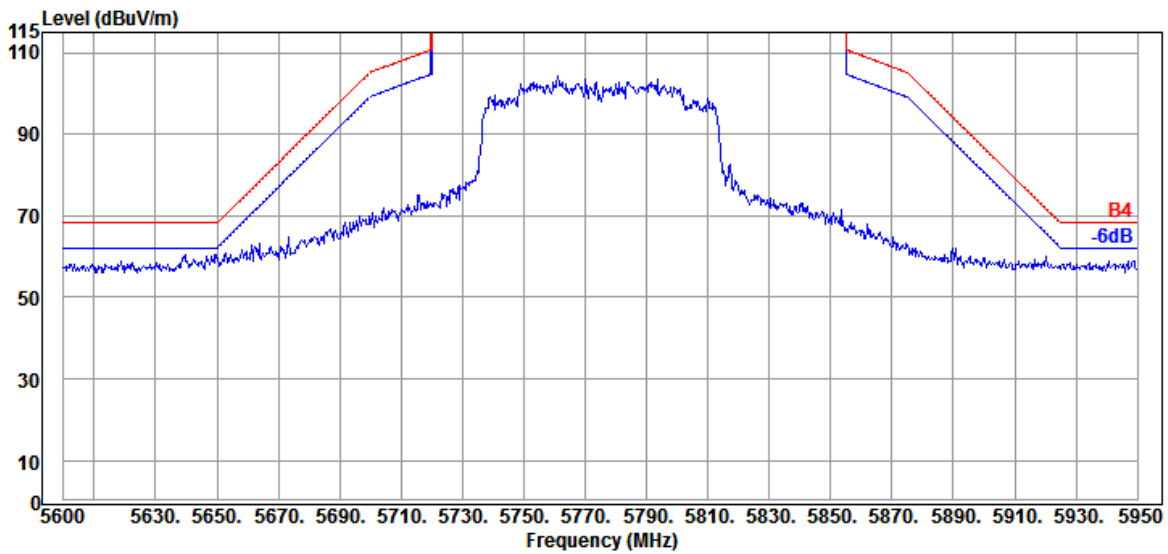


Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

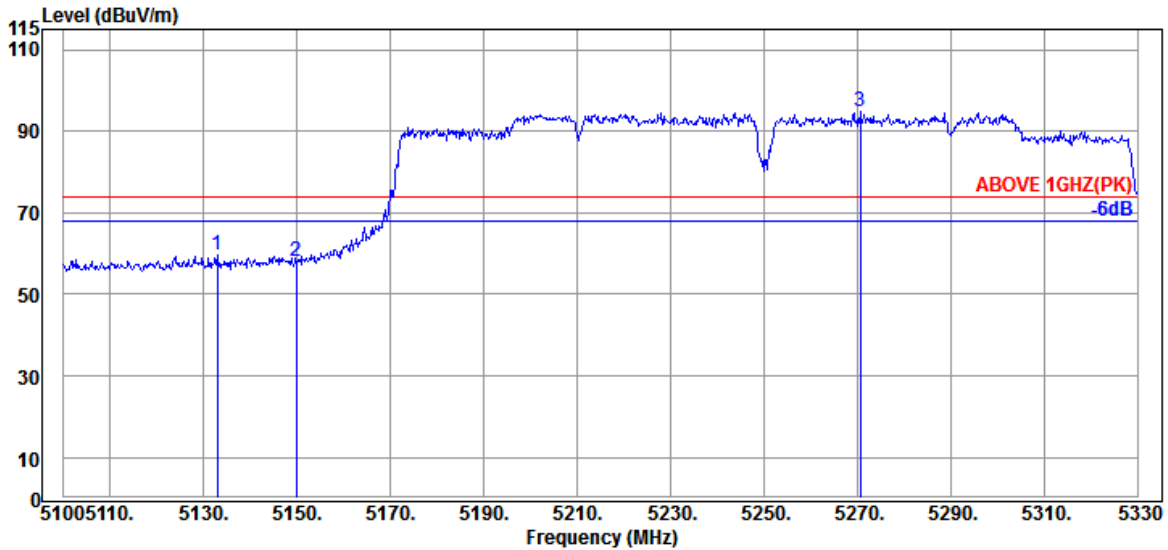

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.890	33.07	8.91	31.63	49.27	59.62	74.00	14.38	Peak
5149.910	33.10	8.92	31.63	47.72	58.11	74.00	15.89	Peak
@ 5270.660	33.13	9.02	31.63	84.48	95.00	---	---	Peak

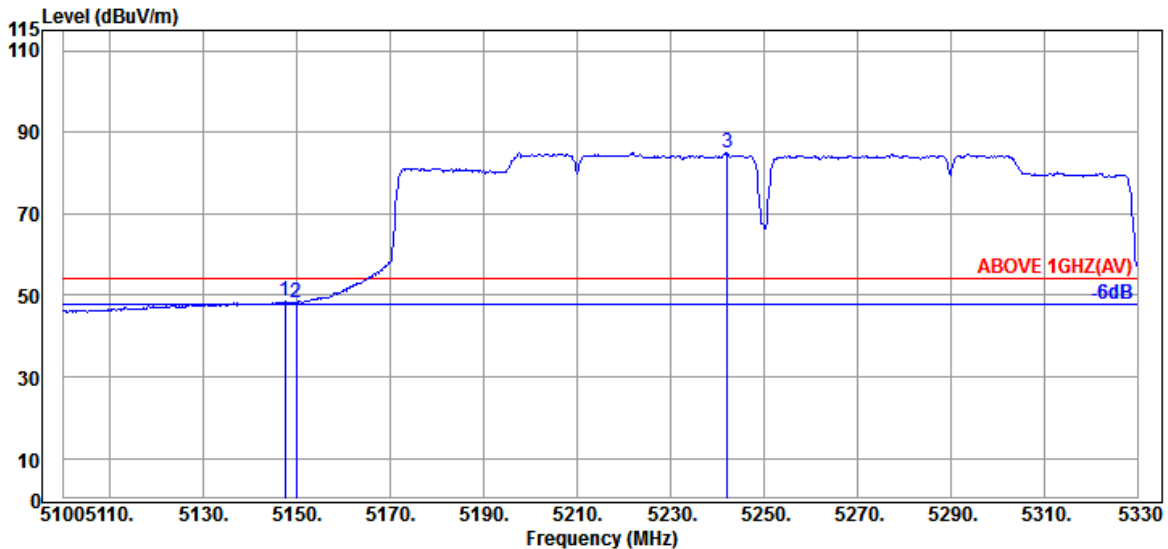


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	33.10	8.92	31.63	38.03	48.42	54.00	5.58	Average
5149.910	33.10	8.92	31.63	37.85	48.24	54.00	5.76	Average
@ 5242.140	33.12	9.01	31.63	74.65	85.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

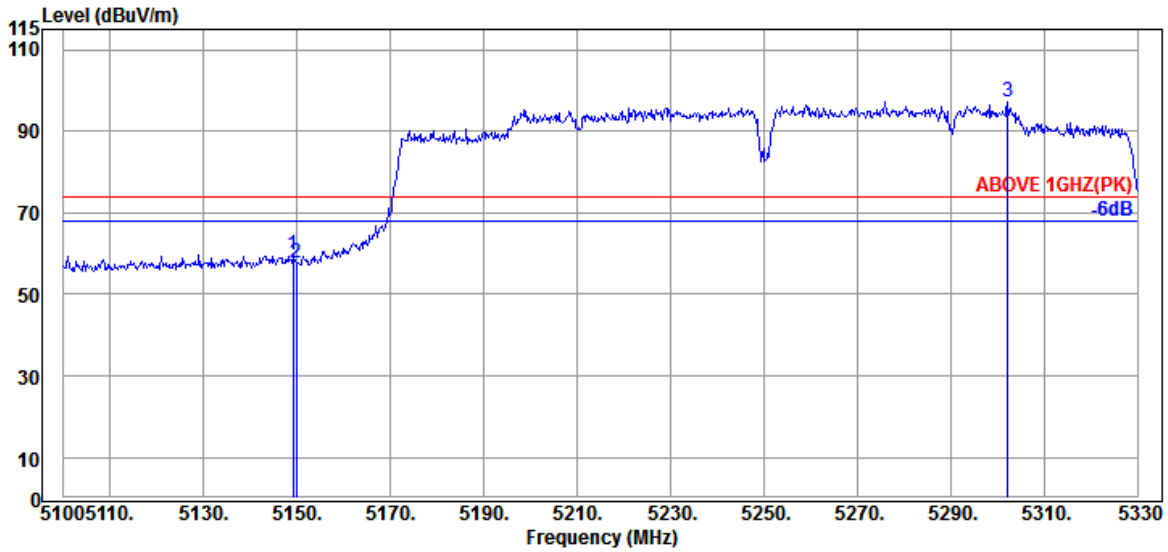

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	33.10	8.92	31.63	49.40	59.79	74.00	14.21	Peak
5149.910	33.10	8.92	31.63	47.42	57.81	74.00	16.19	Peak
@ 5302.170	33.20	9.05	31.63	86.61	97.23	---	---	Peak

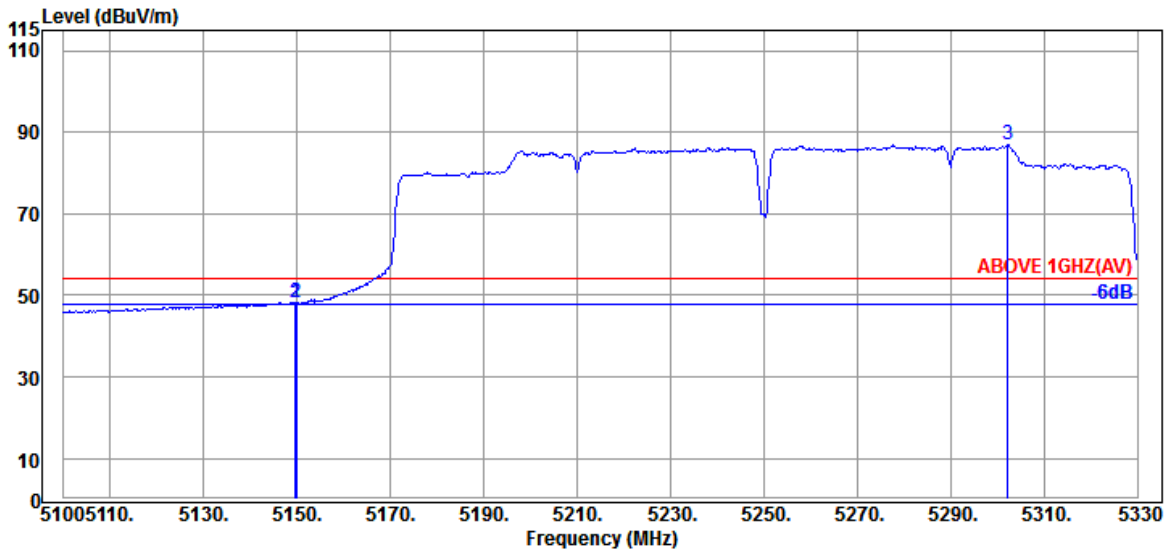


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.20	10.70	34.35	37.55	48.10	54.00	5.90	Average
5149.910	34.20	10.70	34.35	37.18	47.73	54.00	6.27	Average
@ 5258.010	34.40	10.79	34.31	79.90	90.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

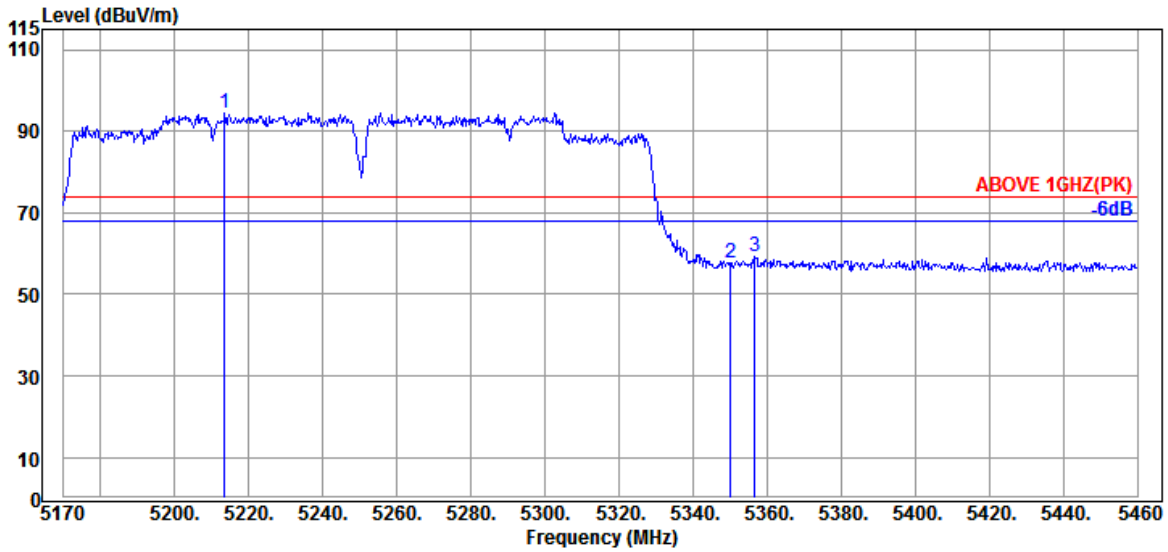

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.500	33.17	8.98	31.63	84.12	94.64	---	---	Peak
5350.090	33.50	9.10	31.63	46.64	57.61	74.00	16.39	Peak
5356.760	33.57	9.10	31.63	48.14	59.18	74.00	14.82	Peak

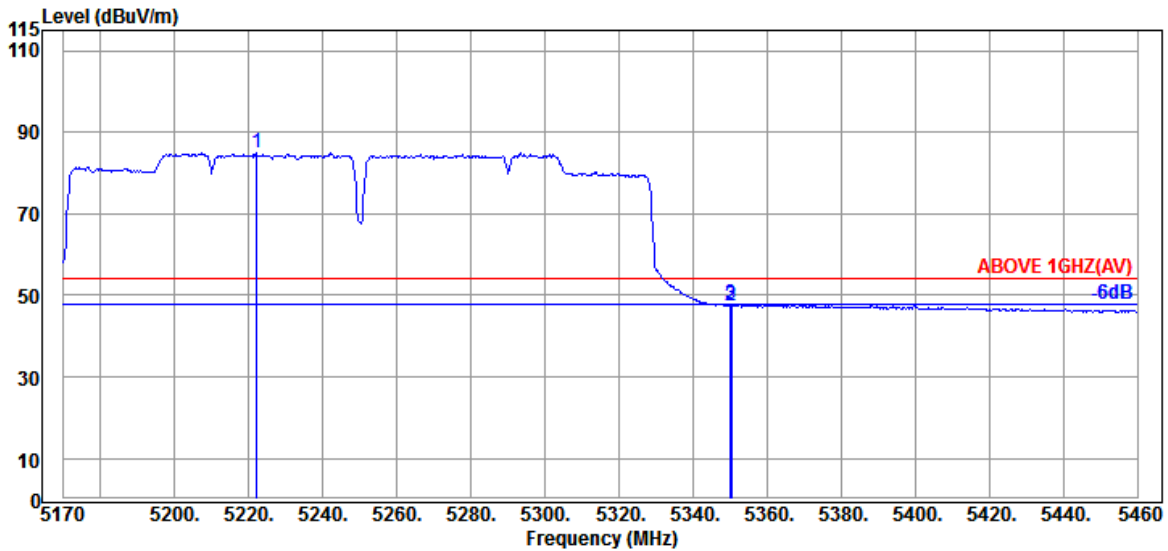


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	33.15	8.98	31.63	74.44	84.94	---	---	Average
5350.090	33.50	9.10	31.63	36.53	47.50	54.00	6.50	Average
5350.380	33.50	9.10	31.63	36.82	47.79	54.00	6.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

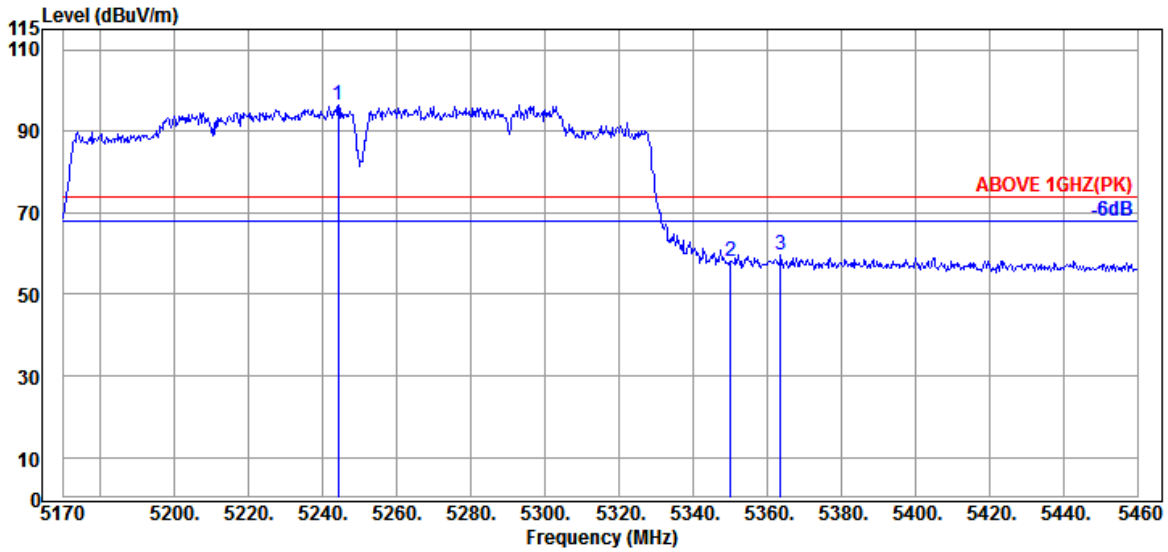

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5244.240	33.12	9.01	31.63	86.10	96.60	---	---	Peak
5350.090	33.50	9.10	31.63	46.97	57.94	74.00	16.06	Peak
5363.720	33.57	9.11	31.63	48.74	59.79	74.00	14.21	Peak

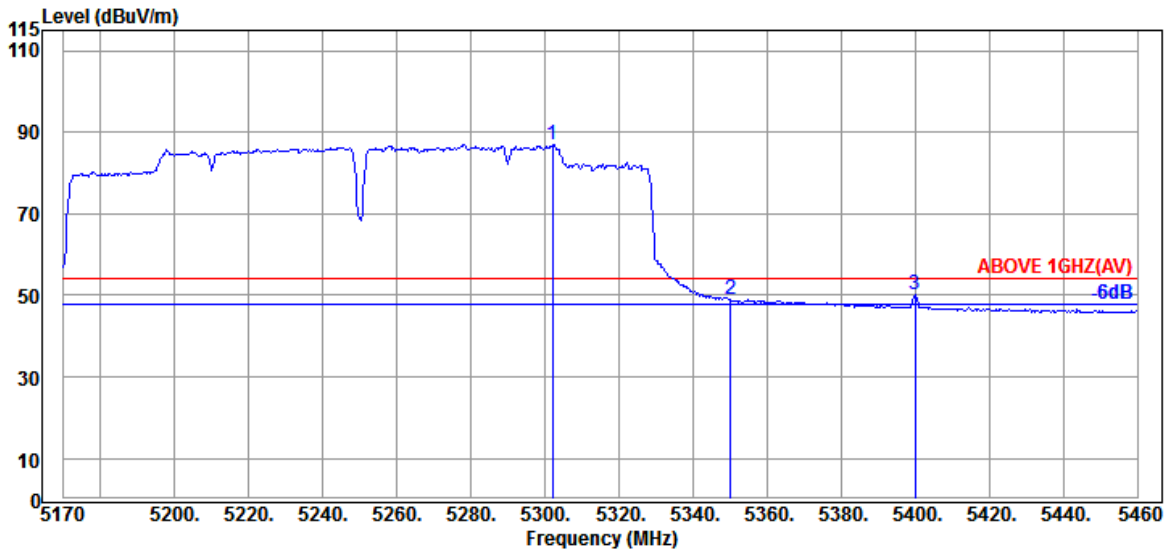


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.950	33.20	9.05	31.63	76.46	87.08	---	---	Average
5350.090	33.50	9.10	31.63	37.85	48.82	54.00	5.18	Average
5399.970	33.70	9.14	31.63	38.82	50.03	54.00	3.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

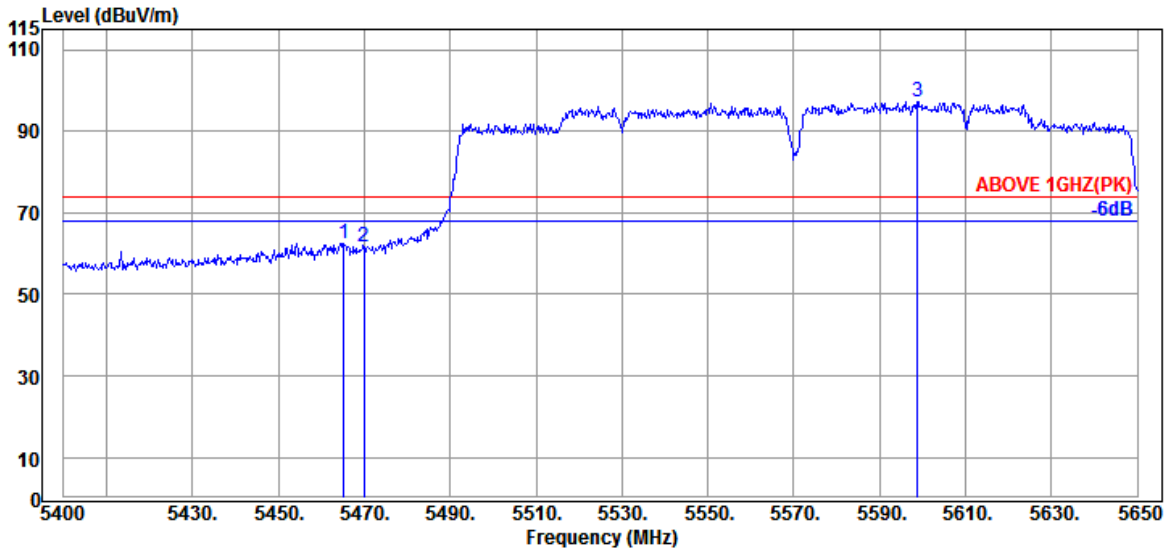

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.250	33.97	9.20	31.63	51.00	62.54	74.00	11.46	Peak
5470.000	33.97	9.20	31.63	50.08	61.62	74.00	12.38	Peak
@ 5598.750	34.20	9.31	31.68	85.57	97.40	---	---	Peak

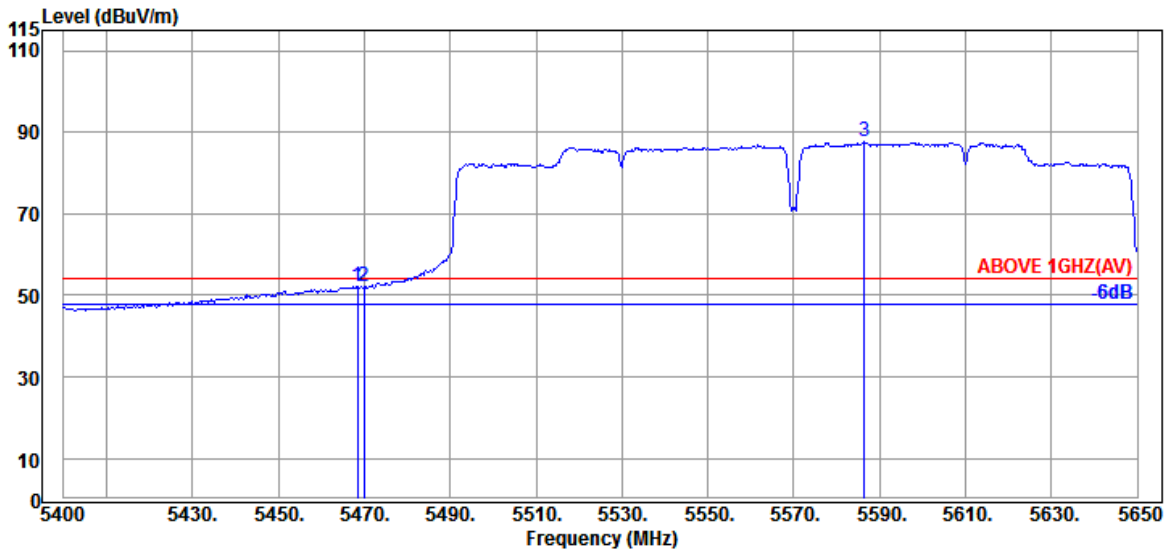


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	33.97	9.20	31.63	40.52	52.06	54.00	1.94	Average
5470.000	33.97	9.20	31.63	40.43	51.97	54.00	2.03	Average
@ 5586.500	34.20	9.30	31.67	75.89	87.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

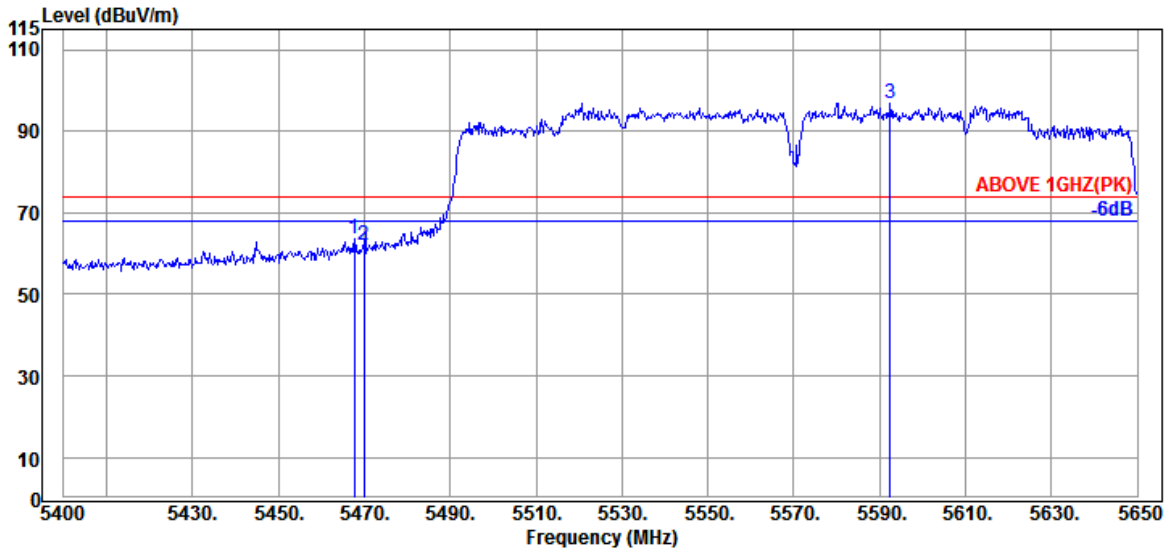

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	33.97	9.20	31.63	52.11	63.65	74.00	10.35	Peak
5470.000	33.97	9.20	31.63	50.55	62.09	74.00	11.91	Peak
@ 5592.500	34.20	9.30	31.67	85.18	97.01	---	---	Peak

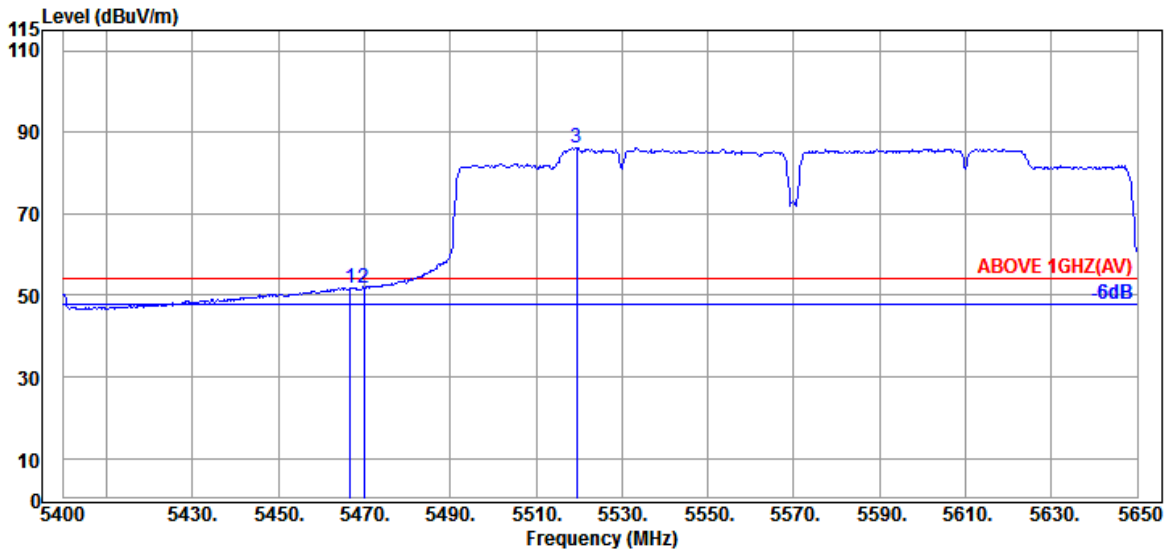


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	33.97	9.20	31.63	40.25	51.79	54.00	2.21	Average
5470.000	33.97	9.20	31.63	40.39	51.93	54.00	2.07	Average
@ 5519.500	34.13	9.24	31.64	74.59	86.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

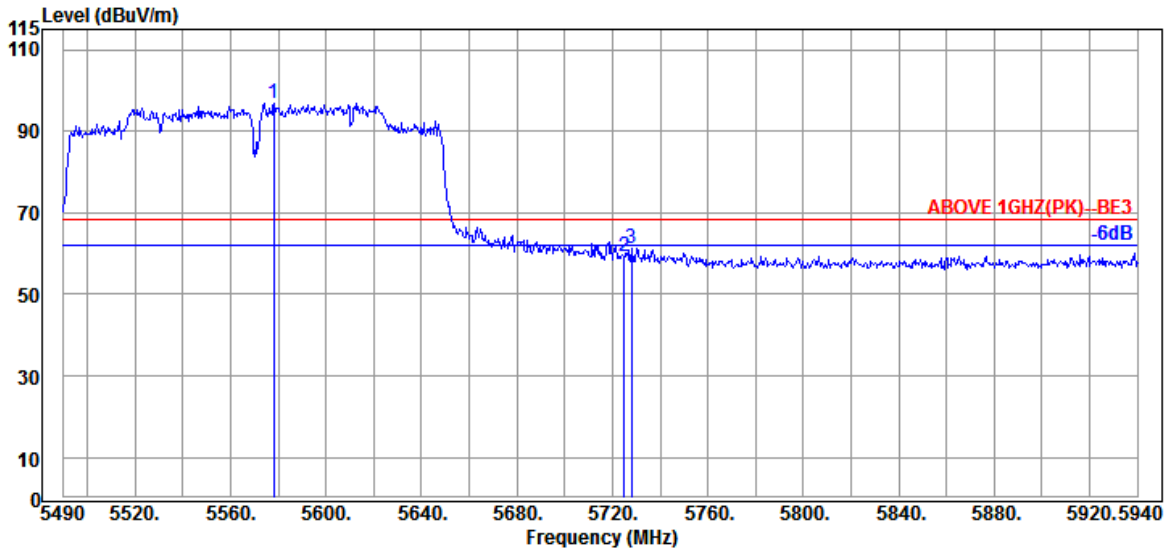

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5578.200	34.20	9.29	31.67	85.20	97.02	---	---	Peak
5724.900	34.50	9.42	31.74	46.99	59.17	68.20	9.03	Peak
5728.050	34.50	9.42	31.75	49.04	61.21	68.20	6.99	Peak

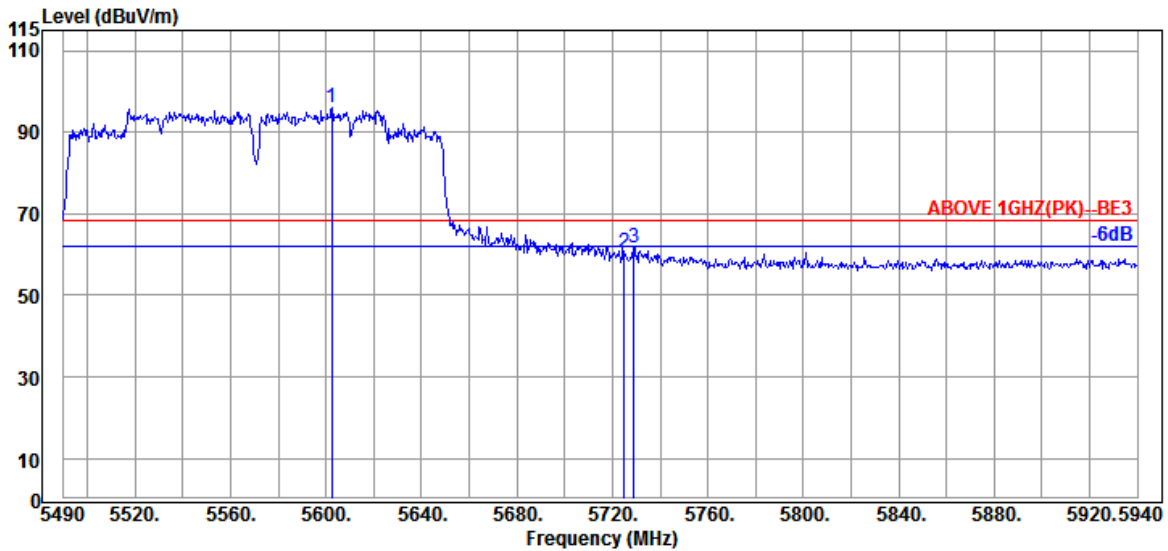


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.500	34.20	9.31	31.68	84.13	95.96	---	---	Peak
5724.900	34.50	9.42	31.74	48.09	60.27	68.20	7.93	Peak
5728.950	34.50	9.42	31.75	49.61	61.78	68.20	6.42	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

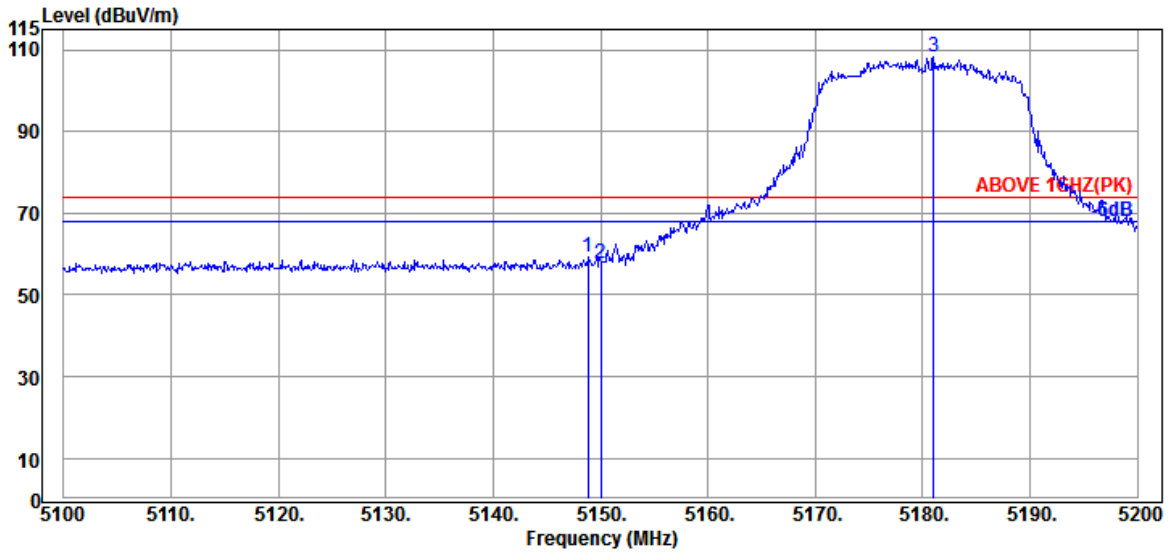

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.10	8.92	31.63	48.73	59.12	74.00	14.88	Peak
5150.000	33.10	8.92	31.63	47.12	57.51	74.00	16.49	Peak
@ 5181.000	33.17	8.95	31.63	97.92	108.41	---	---	Peak

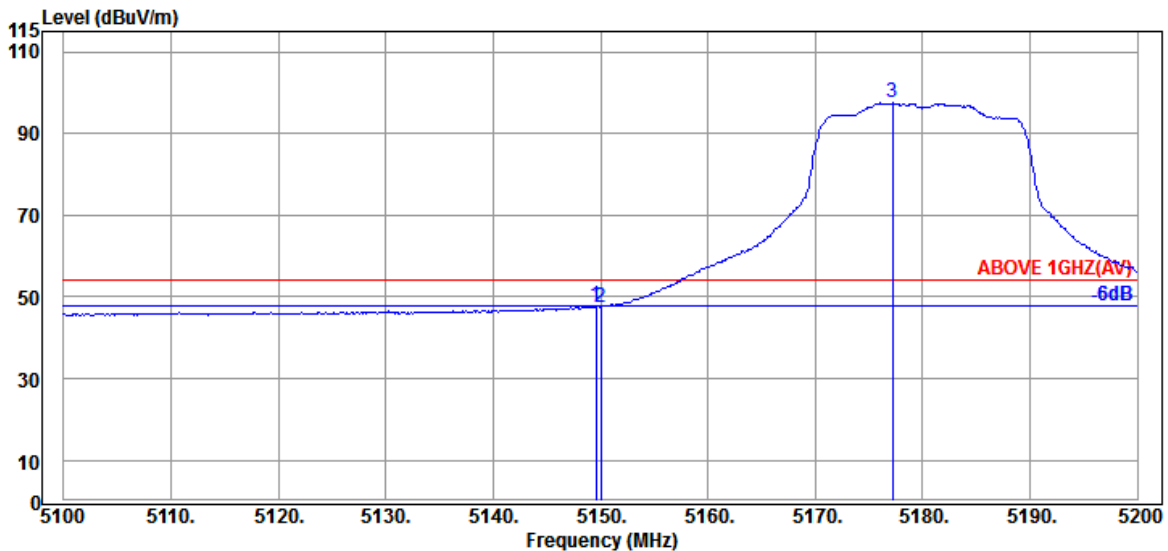


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	37.40	47.79	54.00	6.21	Average
5150.000	33.10	8.92	31.63	37.20	47.59	54.00	6.41	Average
@ 5177.200	33.17	8.95	31.63	86.99	97.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

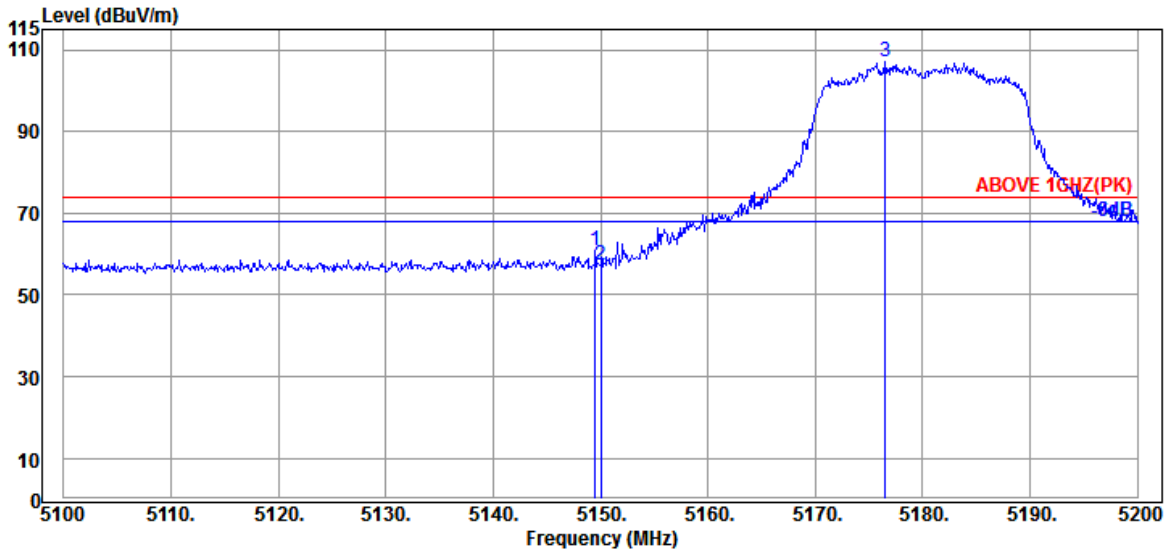

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	50.52	60.91	74.00	13.09	Peak
5150.000	33.10	8.92	31.63	46.73	57.12	74.00	16.88	Peak
@ 5176.500	33.17	8.95	31.63	96.54	107.03	---	---	Peak

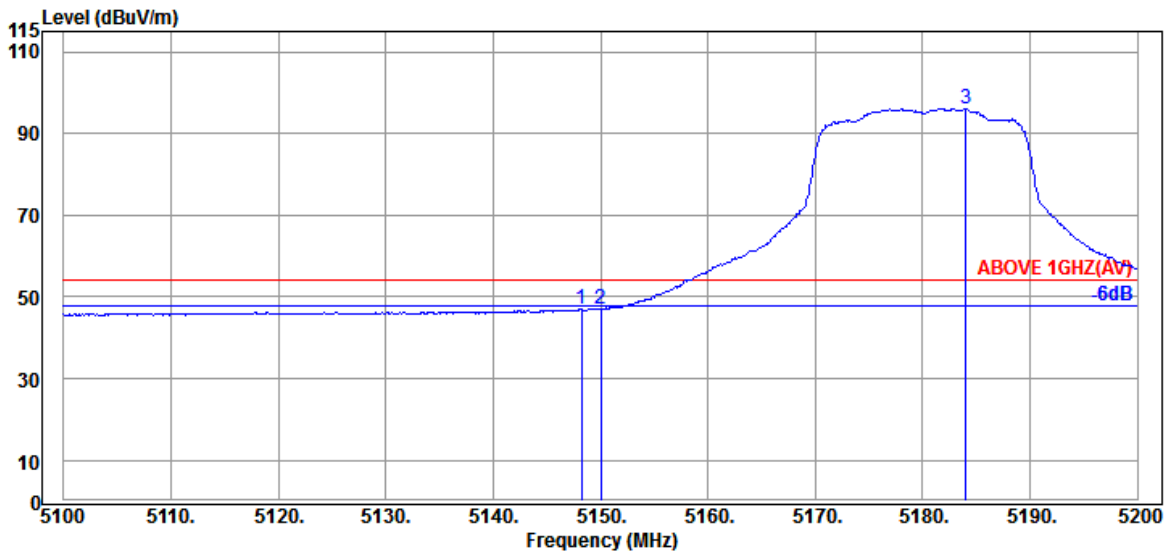


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.10	8.92	31.63	36.72	47.11	54.00	6.89	Average
5150.000	33.10	8.92	31.63	36.49	46.88	54.00	7.12	Average
@ 5184.000	33.17	8.95	31.63	85.66	96.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

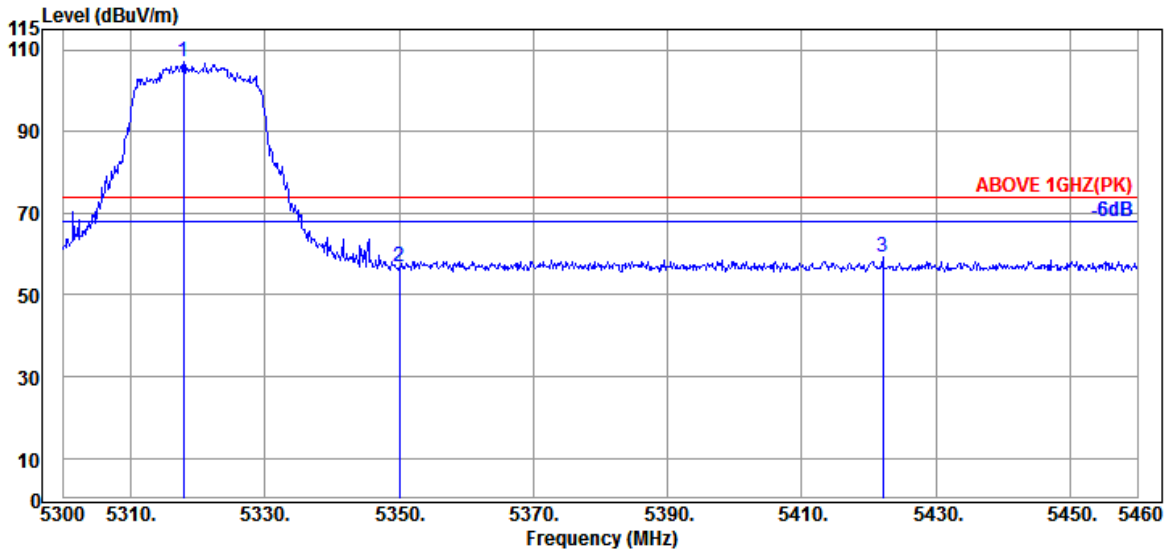

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	33.30	9.07	31.63	96.36	107.10	---	---	Peak
5350.080	33.50	9.10	31.63	45.95	56.92	74.00	17.08	Peak
5422.080	33.80	9.15	31.63	47.78	59.10	74.00	14.90	Peak

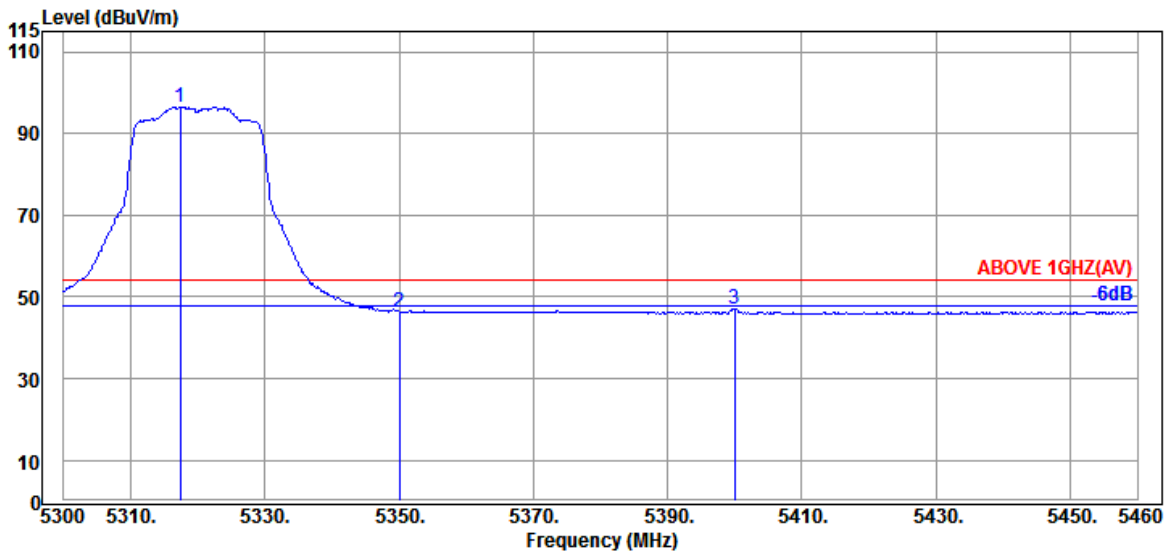


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	33.30	9.07	31.63	85.70	96.44	---	---	Average
5350.080	33.50	9.10	31.63	35.42	46.39	54.00	7.61	Average
5400.000	33.70	9.14	31.63	35.99	47.20	54.00	6.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

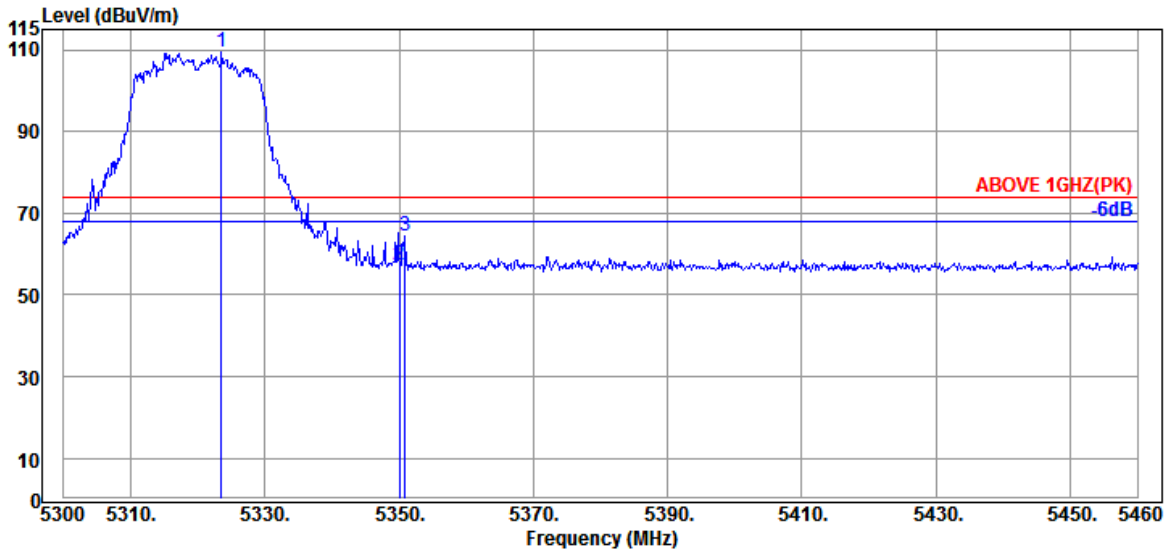

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	33.40	9.07	31.63	98.49	109.33	---	---	Peak
5350.080	33.50	9.10	31.63	46.49	57.46	74.00	16.54	Peak
5350.880	33.50	9.10	31.63	53.44	64.41	74.00	9.59	Peak

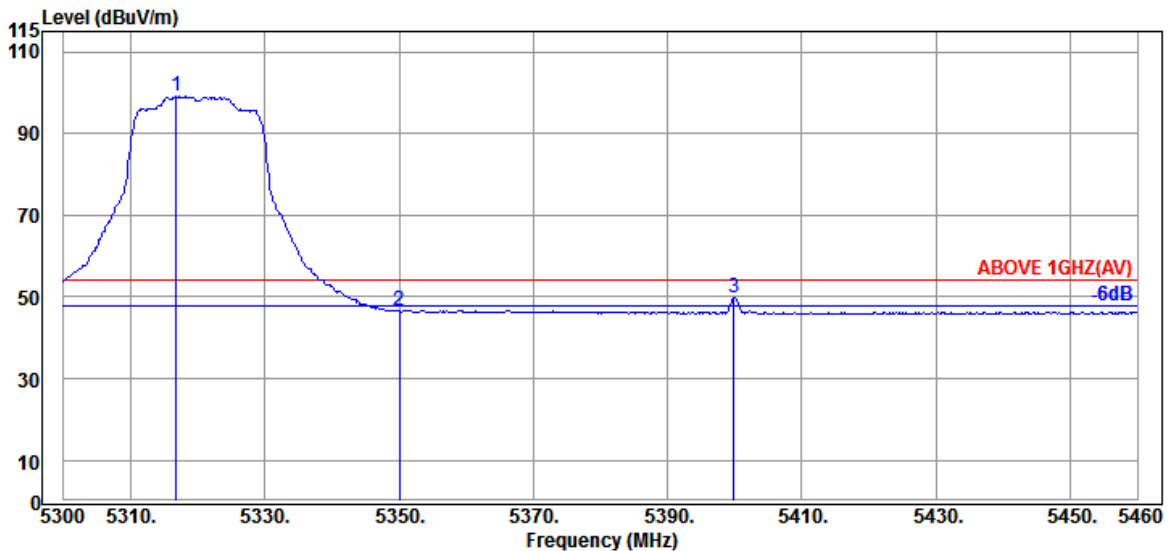


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	33.30	9.07	31.63	88.32	99.06	---	---	Average
5350.080	33.50	9.10	31.63	35.49	46.46	54.00	7.54	Average
5399.840	33.70	9.14	31.63	38.58	49.79	54.00	4.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

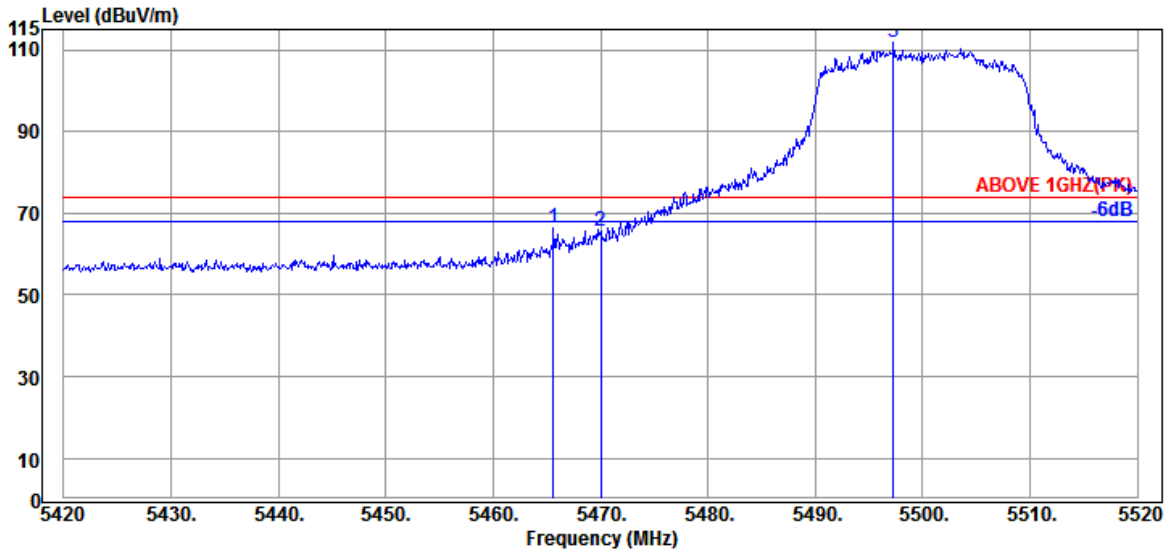

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	33.97	9.20	31.63	54.77	66.31	74.00	7.69	Peak
5470.000	33.97	9.20	31.63	53.99	65.53	74.00	8.47	Peak
@ 5497.300	34.10	9.23	31.63	100.33	112.03	---	---	Peak

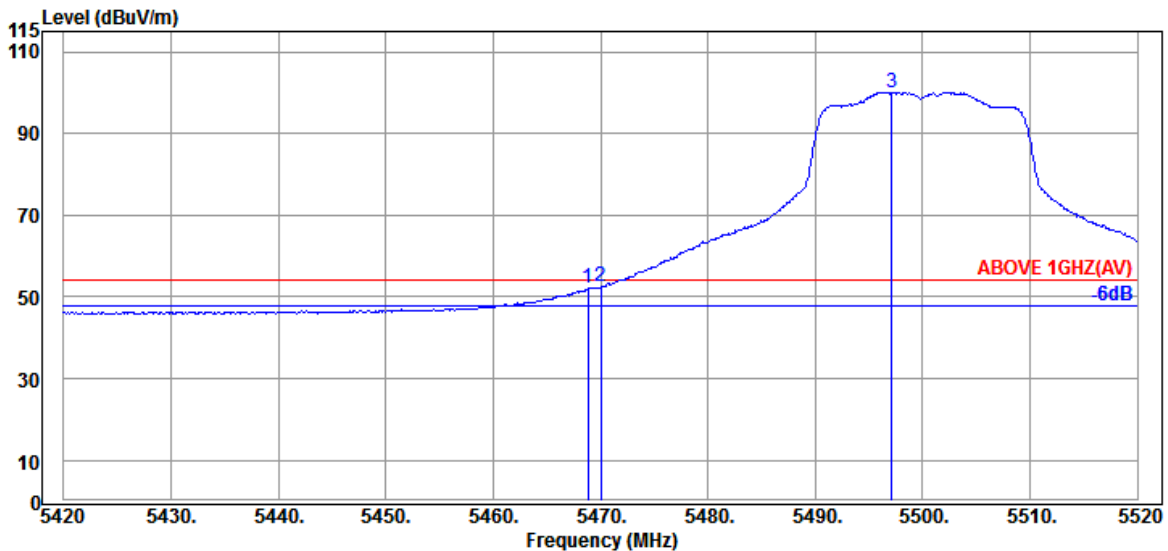


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	33.97	9.20	31.63	40.51	52.05	54.00	1.95	Average
5470.000	33.97	9.20	31.63	40.82	52.36	54.00	1.64	Average
@ 5497.100	34.10	9.23	31.63	88.47	100.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

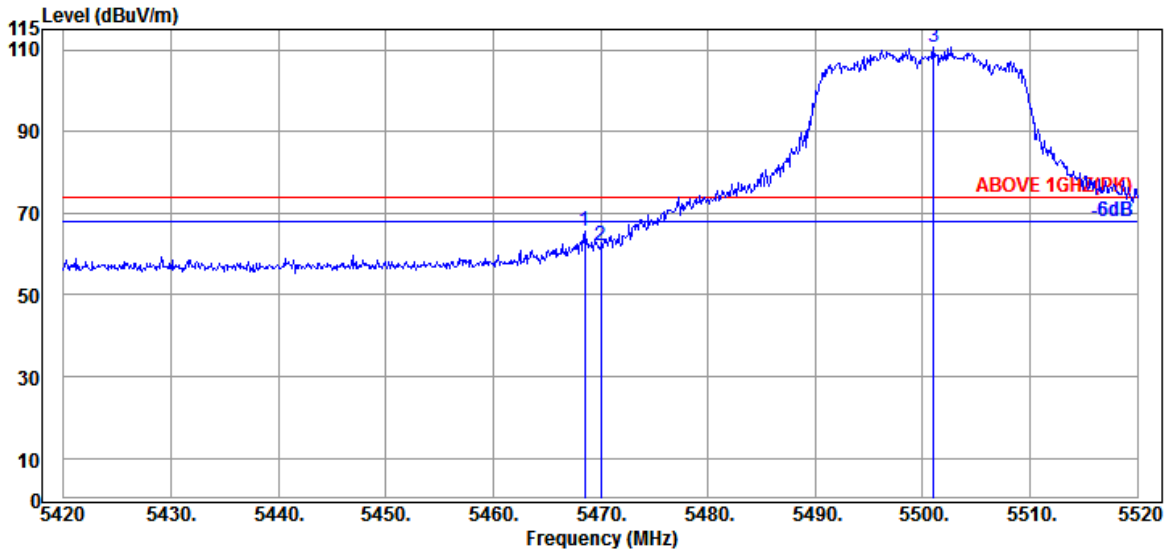

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	33.97	9.20	31.63	54.02	65.56	74.00	8.44	Peak
5470.000	33.97	9.20	31.63	50.34	61.88	74.00	12.12	Peak
@ 5501.000	34.10	9.23	31.63	98.99	110.69	---	---	Peak

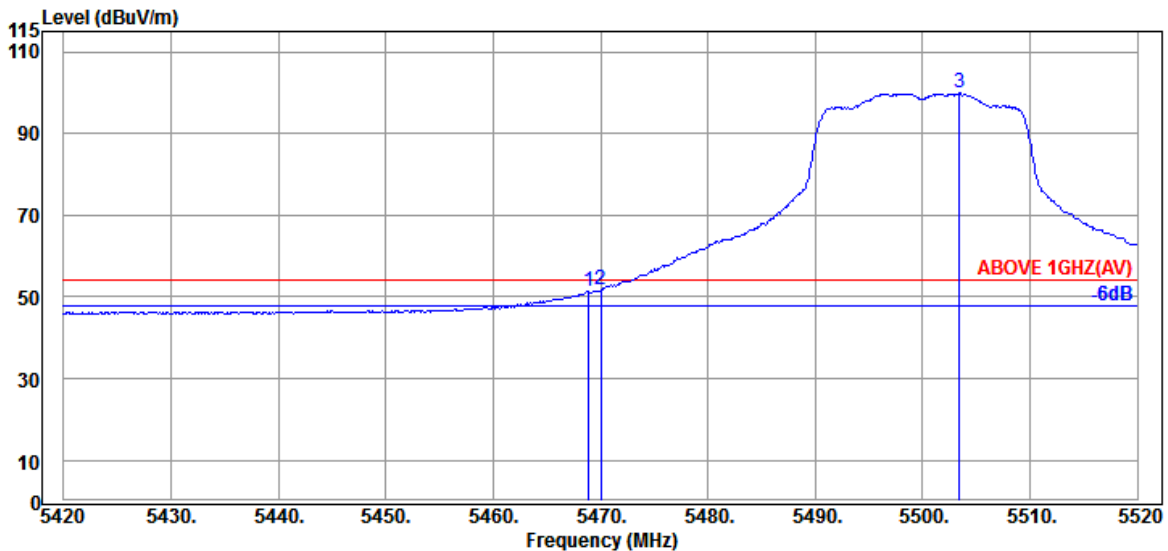


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	39.83	51.37	54.00	2.63	Average
5470.000	33.97	9.20	31.63	40.10	51.64	54.00	2.36	Average
@ 5503.400	34.10	9.23	31.63	88.19	99.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

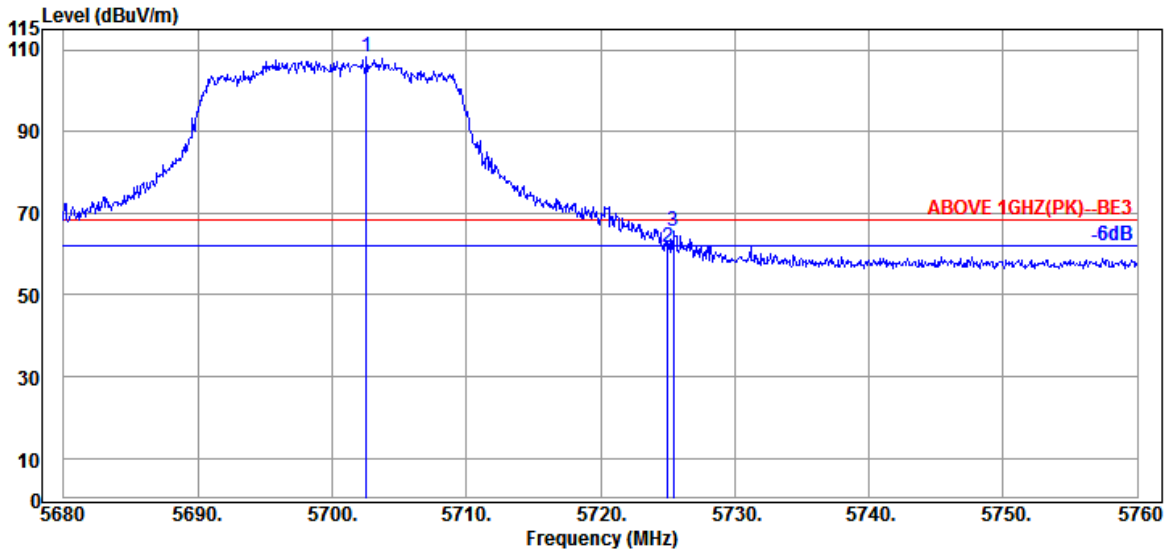

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.560	34.30	9.40	31.73	96.12	108.09	---	---	Peak
5725.040	34.50	9.42	31.74	49.57	61.75	68.20	6.45	Peak
5725.440	34.50	9.42	31.74	53.32	65.50	68.20	2.70	Peak

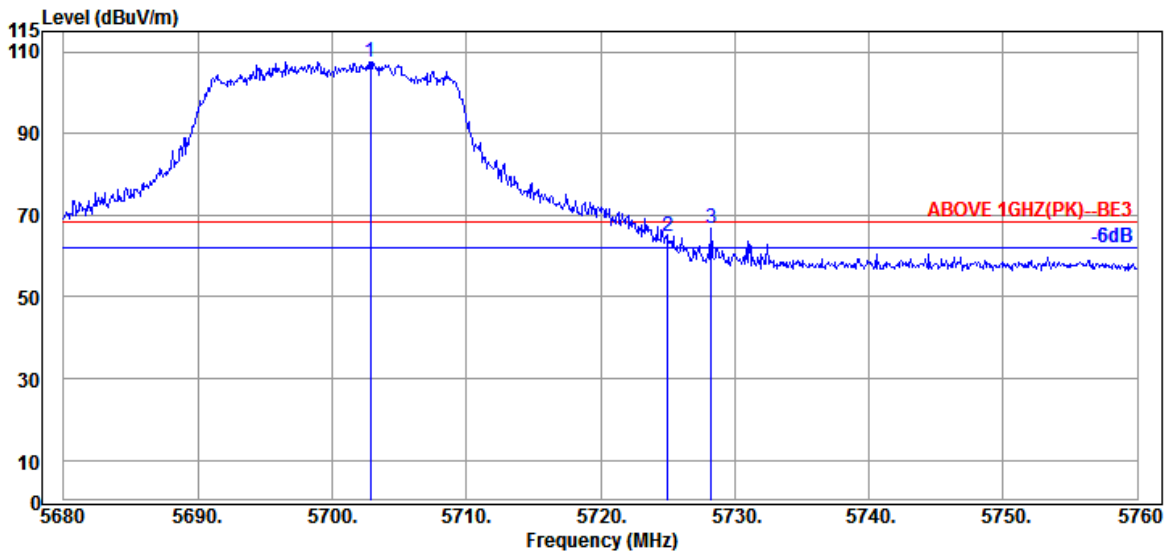


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.880	34.30	9.40	31.73	95.54	107.51	---	---	Peak
5725.040	34.50	9.42	31.74	52.74	64.92	68.20	3.28	Peak
5728.240	34.50	9.42	31.75	54.56	66.73	68.20	1.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

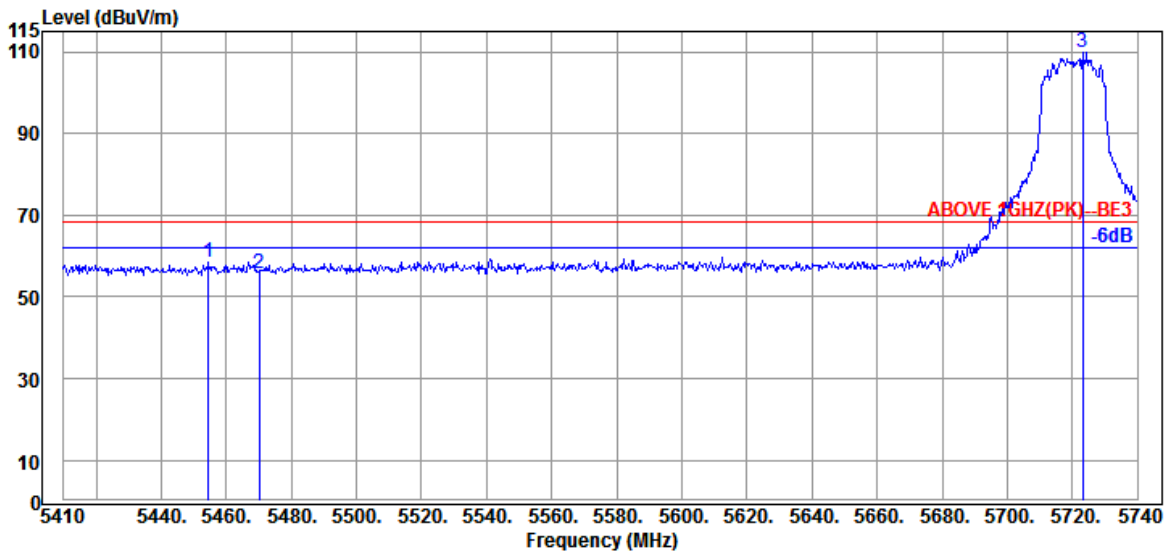

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.550	33.90	9.18	31.63	47.10	58.55	68.20	9.65	Peak
5470.060	33.97	9.20	31.63	44.31	55.85	68.20	12.35	Peak
@ 5723.170	34.50	9.42	31.74	97.71	109.89	---	---	Peak

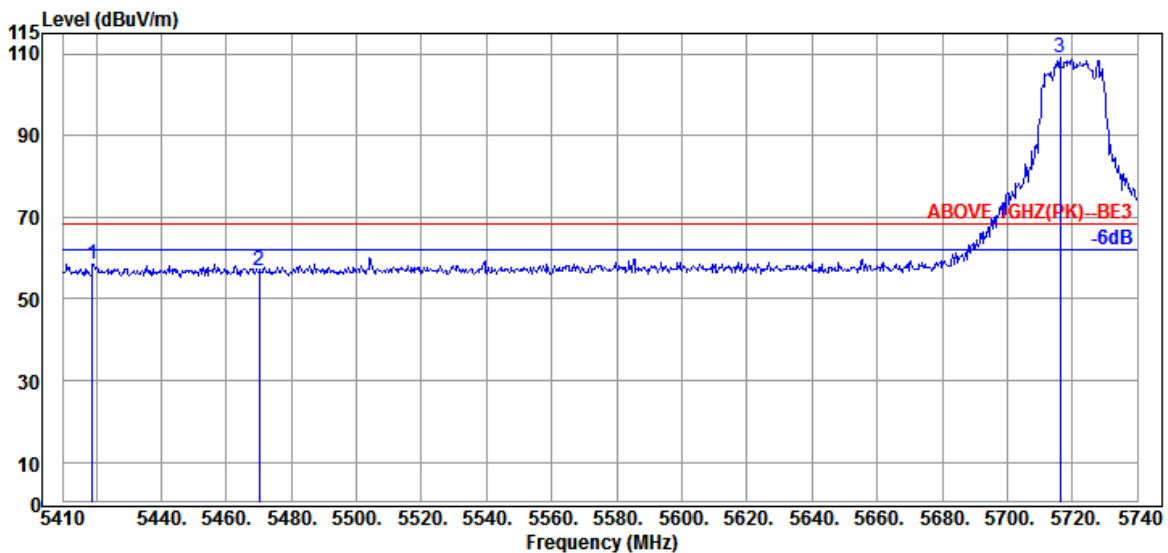


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.910	33.80	9.15	31.63	47.34	58.66	68.20	9.54	Peak
5470.060	33.97	9.20	31.63	45.32	56.86	68.20	11.34	Peak
@ 5716.240	34.40	9.40	31.74	96.82	108.88	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

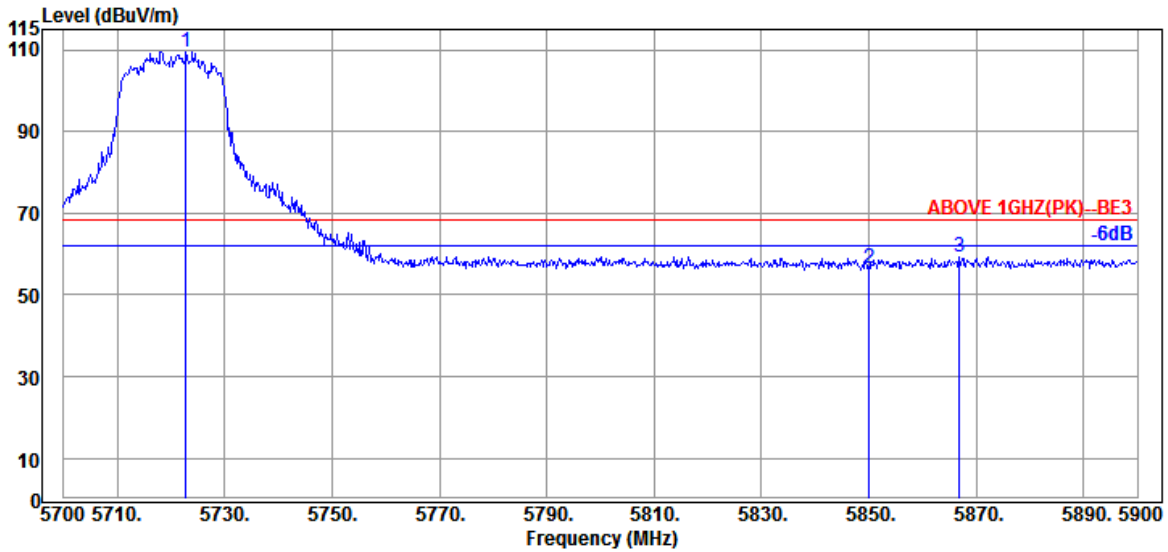

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	34.50	9.42	31.74	97.43	109.61	---	---	Peak
5850.000	35.00	9.52	31.80	43.95	56.67	68.20	11.53	Peak
5866.800	35.03	9.53	31.81	46.68	59.43	68.20	8.77	Peak

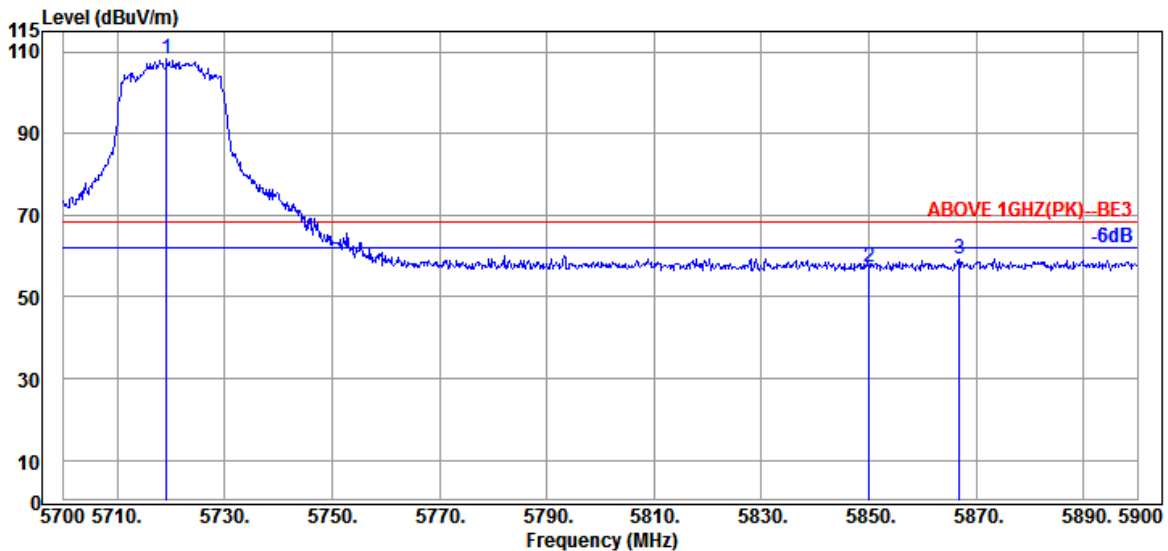


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.200	34.40	9.42	31.74	96.21	108.29	---	---	Peak
5850.000	35.00	9.52	31.80	44.64	57.36	68.20	10.84	Peak
5866.800	35.03	9.53	31.81	46.65	59.40	68.20	8.80	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

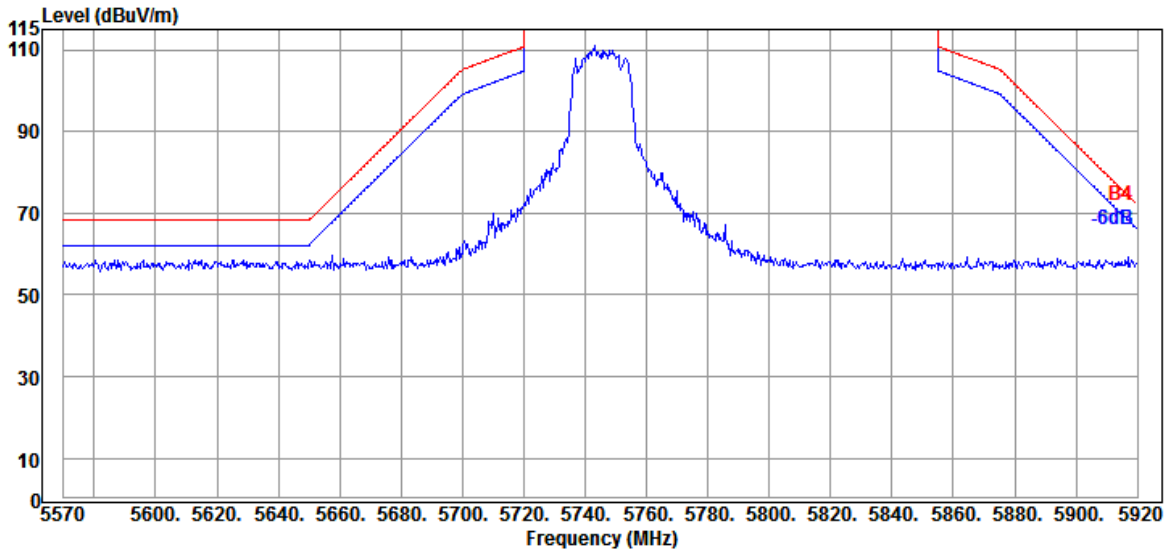


Antenna at Vertical Polarization

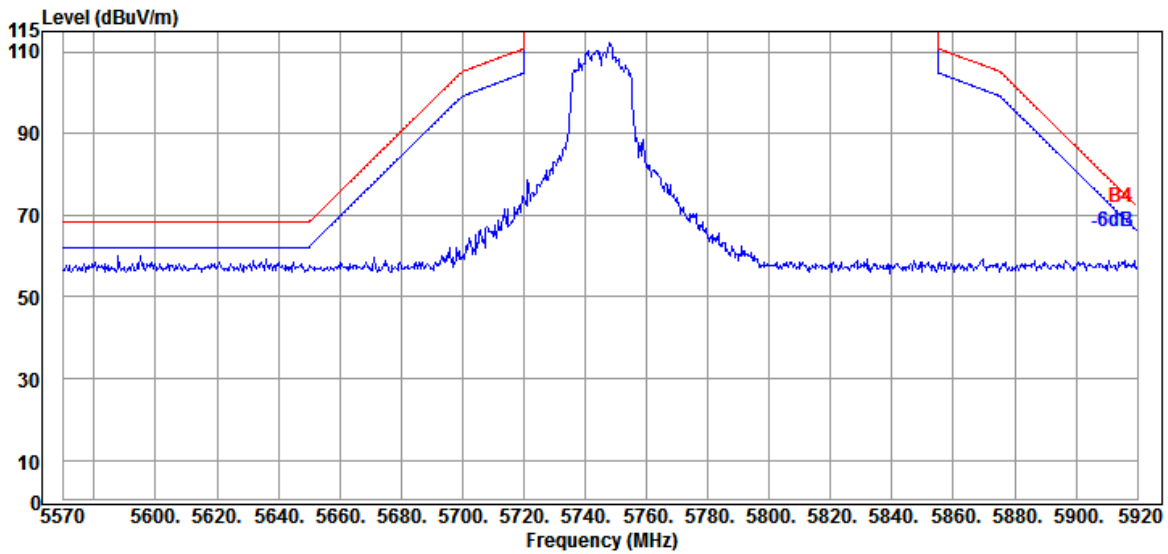


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

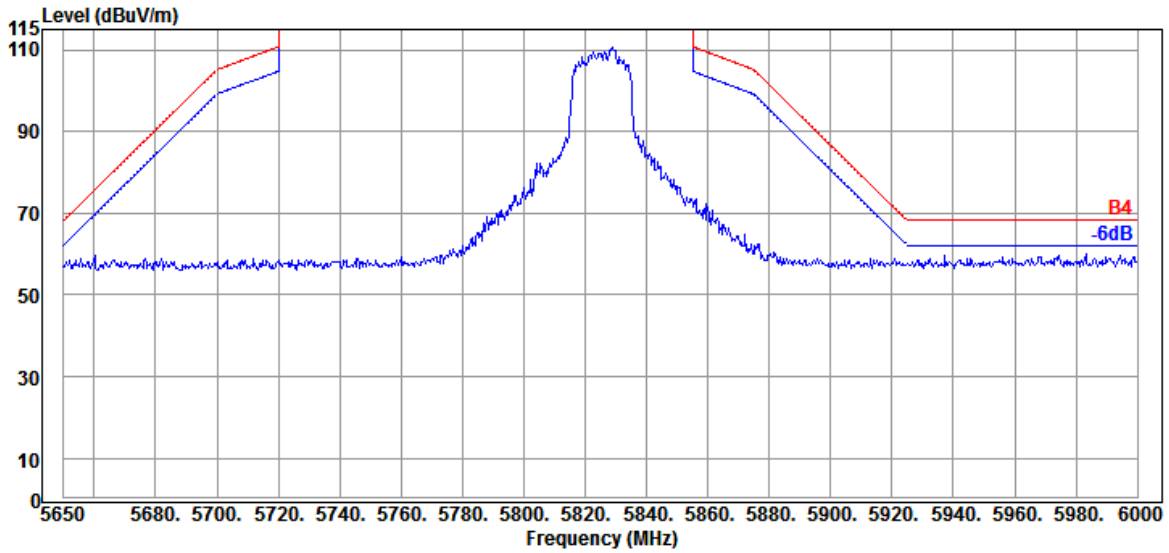

Antenna at Vertical Polarization

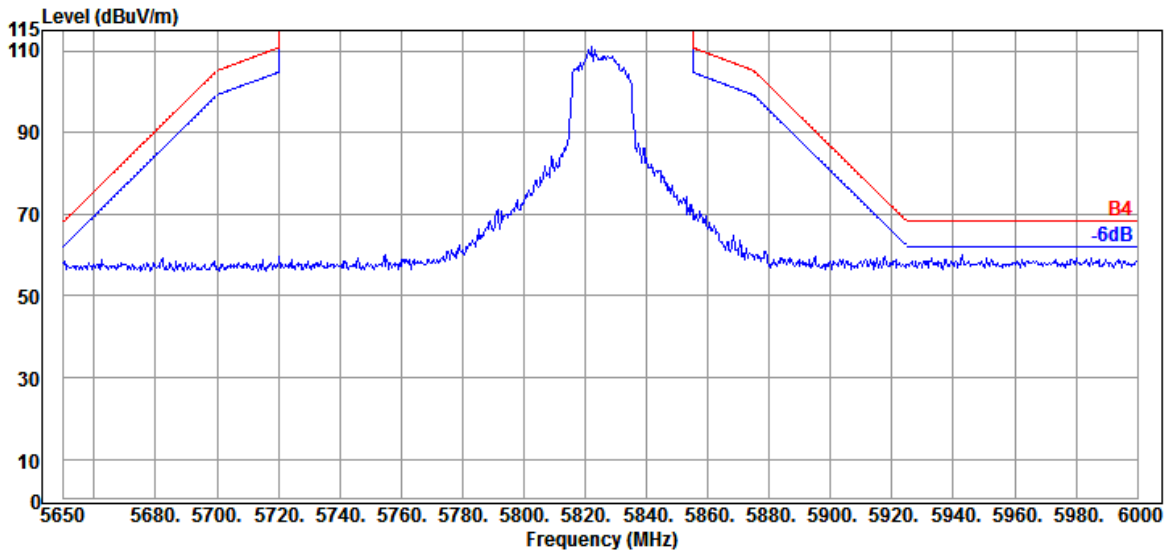


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

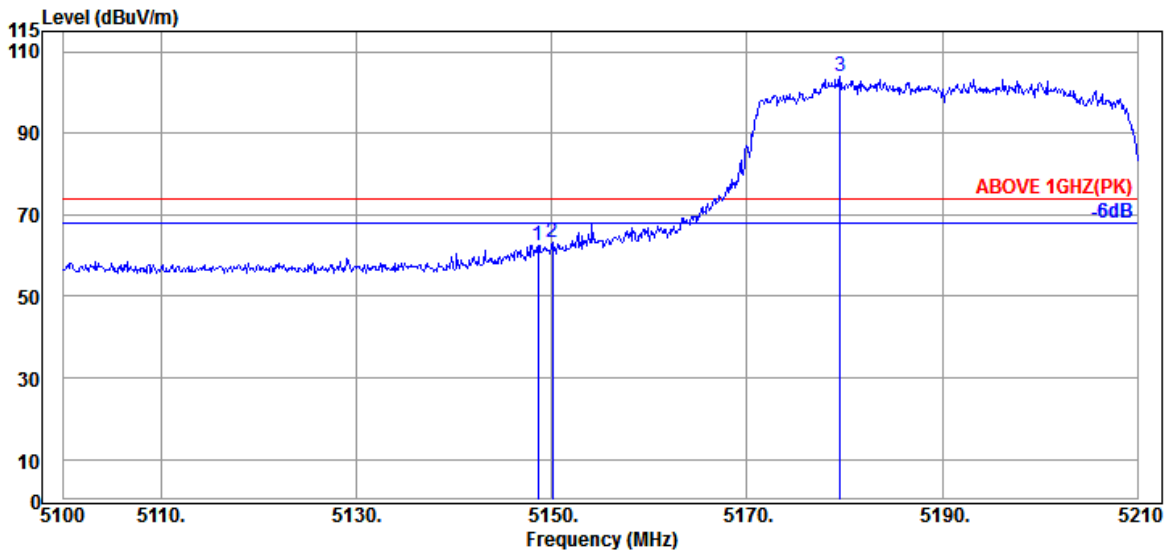

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	33.10	8.92	31.63	52.21	62.60	74.00	11.40	Peak
5150.050	33.10	8.92	31.63	52.83	63.22	74.00	10.78	Peak
@ 5179.530	33.17	8.95	31.63	93.51	104.00	---	---	Peak

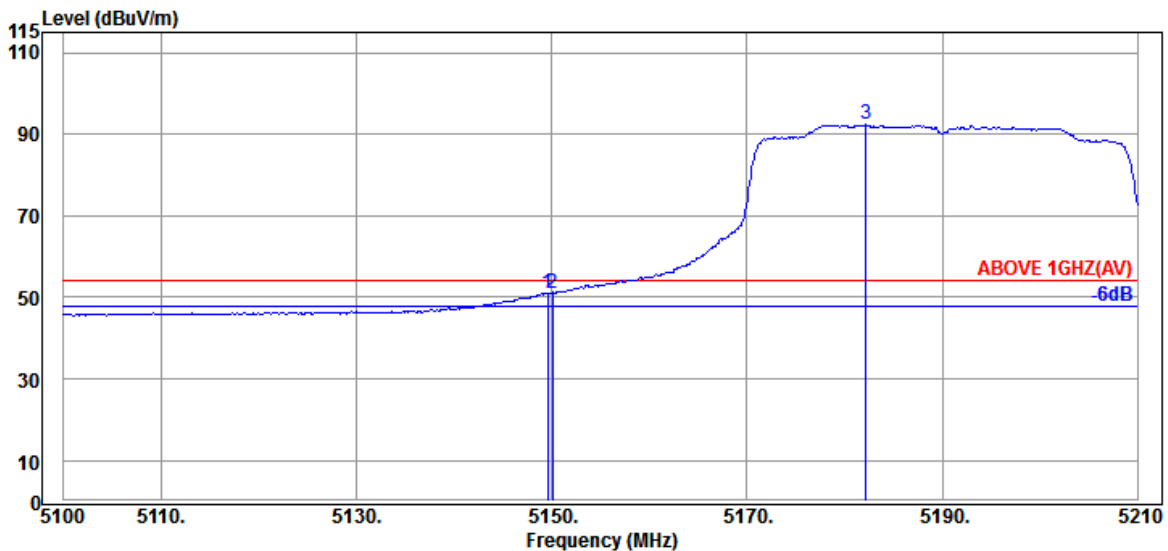


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.10	8.92	31.63	40.65	51.04	54.00	2.96	Average
5150.050	33.10	8.92	31.63	40.72	51.11	54.00	2.89	Average
@ 5182.170	33.17	8.95	31.63	81.88	92.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

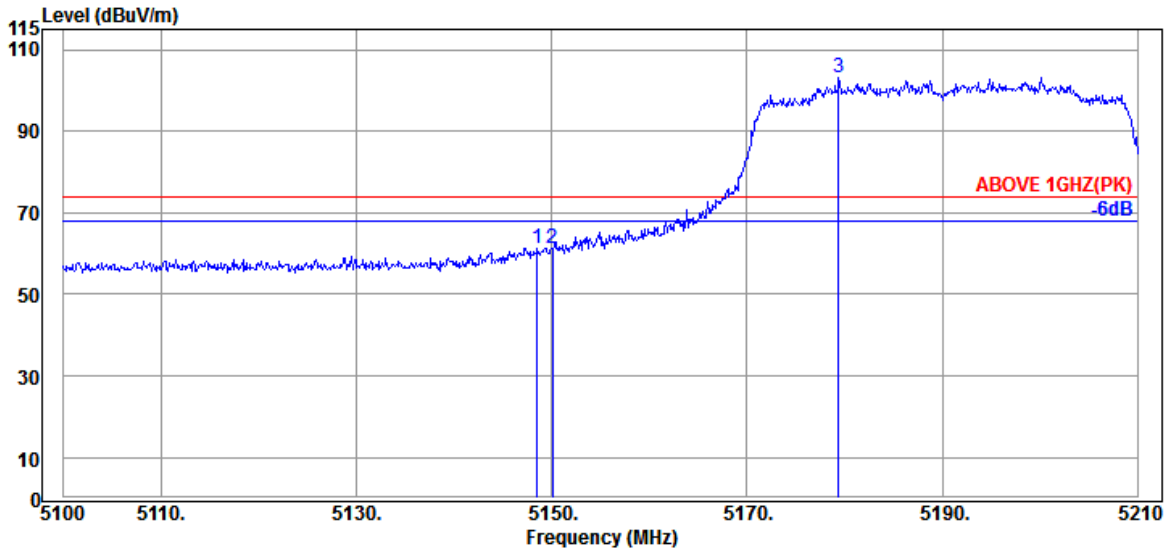

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	33.10	8.92	31.63	51.02	61.41	74.00	12.59	Peak
5150.050	33.10	8.92	31.63	50.94	61.33	74.00	12.67	Peak
@ 5179.420	33.17	8.95	31.63	92.70	103.19	---	---	Peak

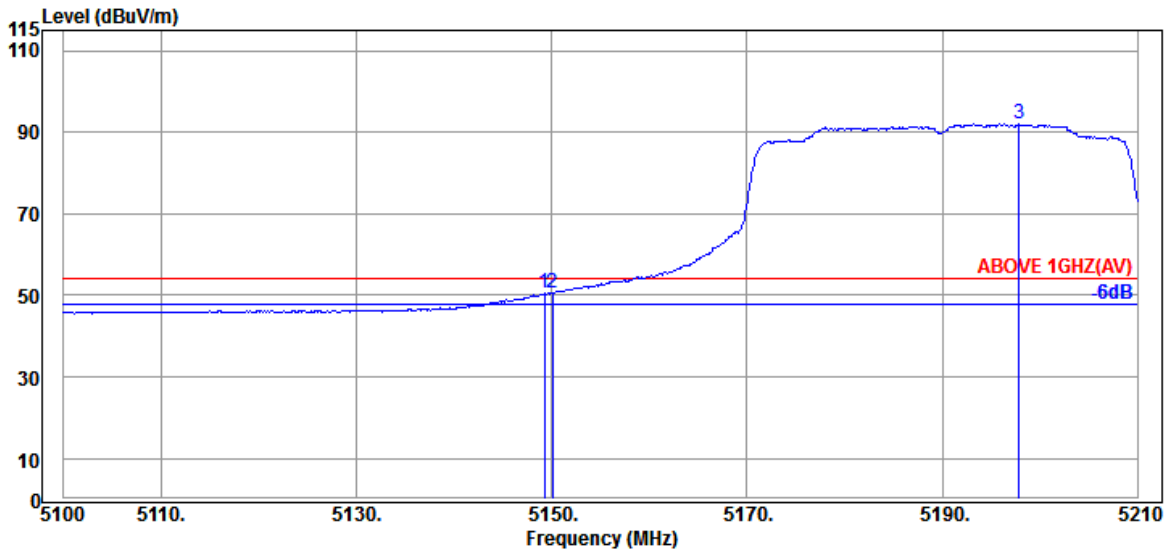


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	33.10	8.92	31.63	40.04	50.43	54.00	3.57	Average
5150.050	33.10	8.92	31.63	40.07	50.46	54.00	3.54	Average
@ 5197.900	33.20	8.96	31.63	81.45	91.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

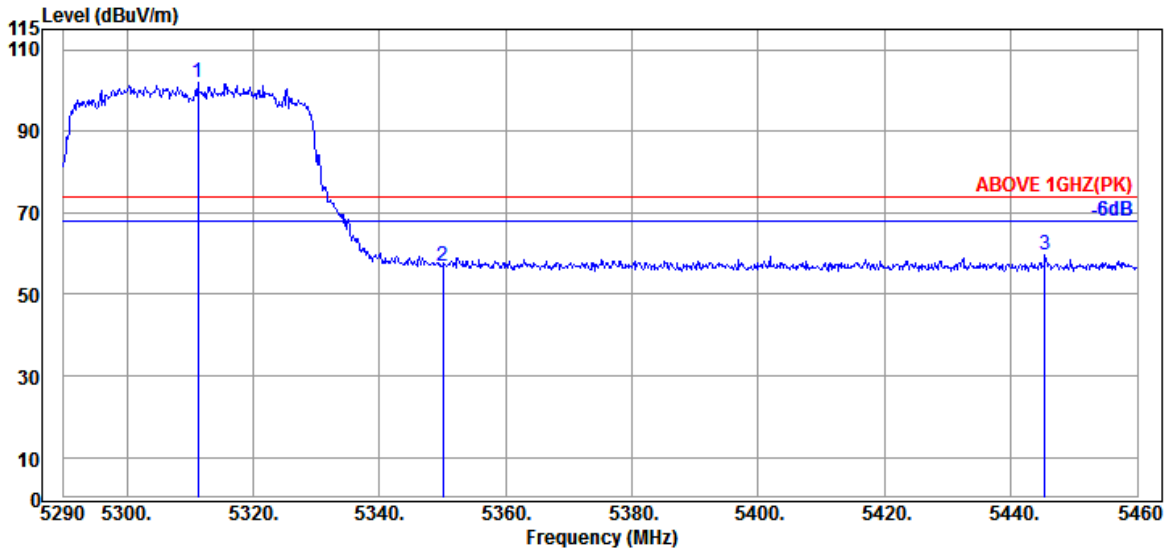

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.250	33.30	9.07	31.63	91.28	102.02	---	---	Peak
5350.010	33.50	9.10	31.63	45.97	56.94	74.00	17.06	Peak
5445.380	33.85	9.17	31.63	48.39	59.78	74.00	14.22	Peak

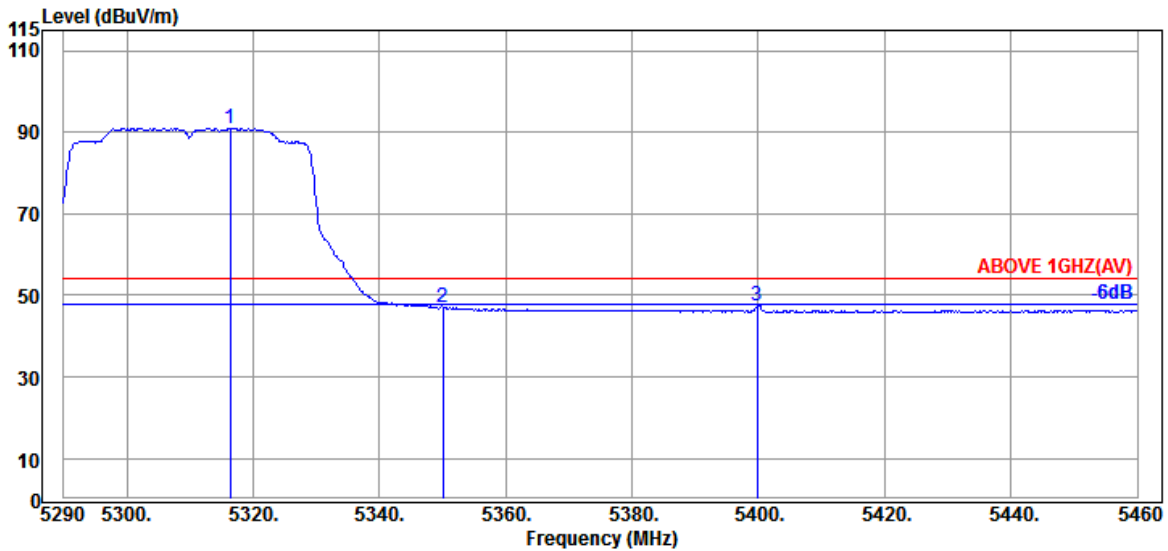


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.350	33.30	9.07	31.63	80.29	91.03	---	---	Average
5350.010	33.50	9.10	31.63	36.23	47.20	54.00	6.80	Average
5399.820	33.70	9.14	31.63	36.29	47.50	54.00	6.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

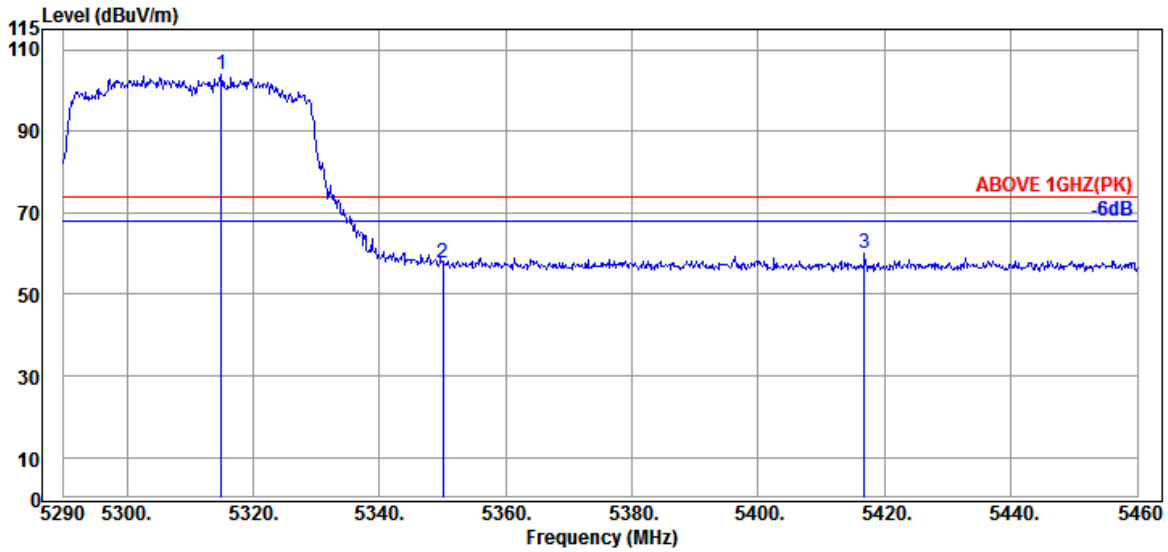

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.990	33.30	9.07	31.63	93.23	103.97	---	---	Peak
5350.010	33.50	9.10	31.63	46.87	57.84	74.00	16.16	Peak
5416.820	33.80	9.15	31.63	48.62	59.94	74.00	14.06	Peak

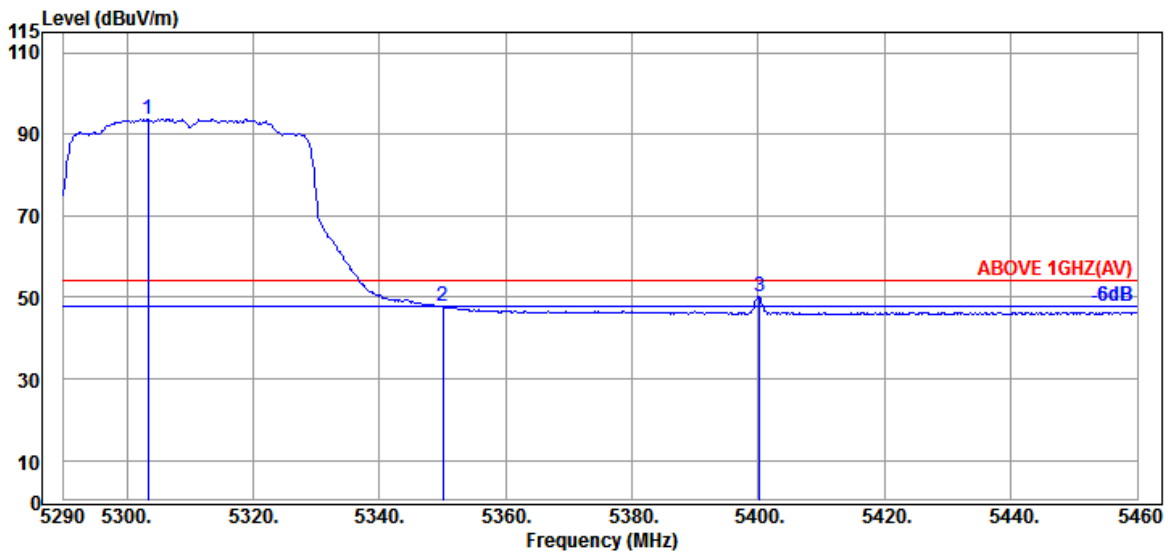


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.430	33.20	9.05	31.63	83.09	93.71	---	---	Average
5350.010	33.50	9.10	31.63	36.70	47.67	54.00	6.33	Average
5400.160	33.70	9.14	31.63	38.97	50.18	54.00	3.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

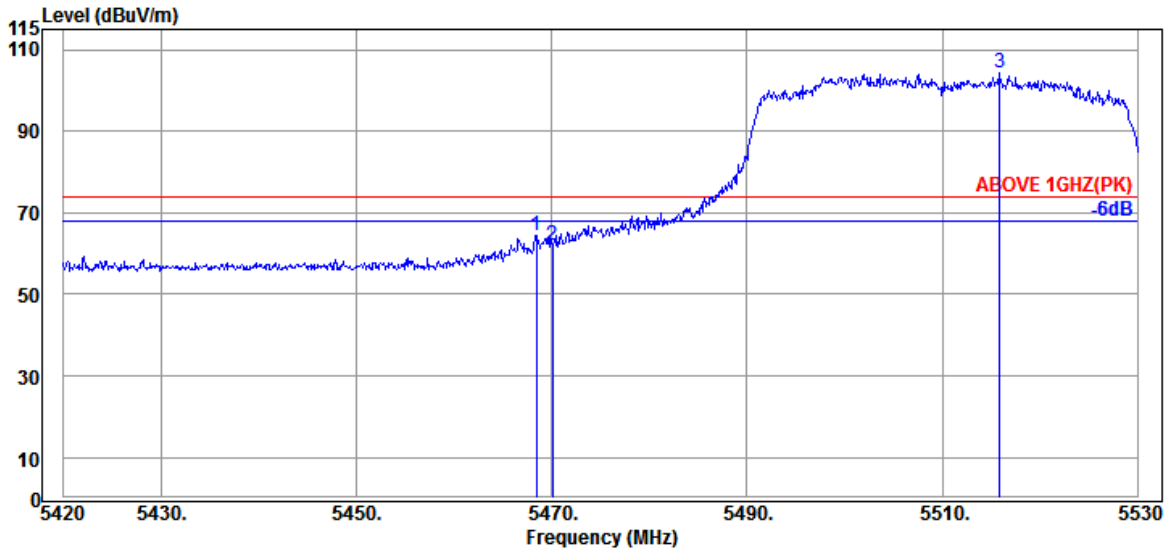

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	33.97	9.20	31.63	53.04	64.58	74.00	9.42	Peak
5470.050	33.97	9.20	31.63	50.62	62.16	74.00	11.84	Peak
@ 5515.920	34.13	9.24	31.64	92.47	104.20	---	---	Peak

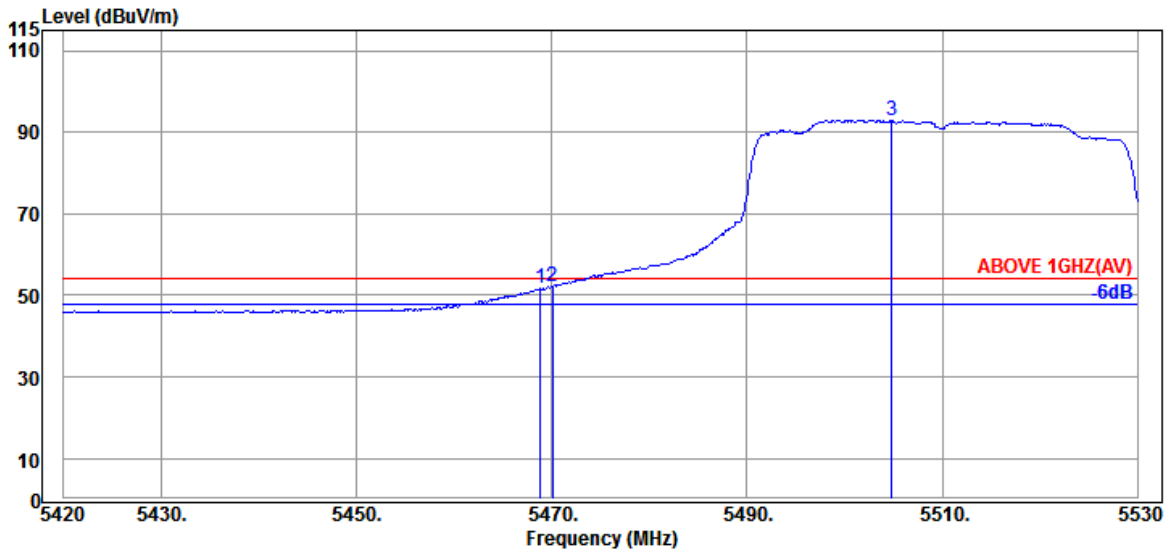


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	33.97	9.20	31.63	40.23	51.77	54.00	2.23	Average
5470.050	33.97	9.20	31.63	40.65	52.19	54.00	1.81	Average
@ 5504.810	34.10	9.23	31.63	81.26	92.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

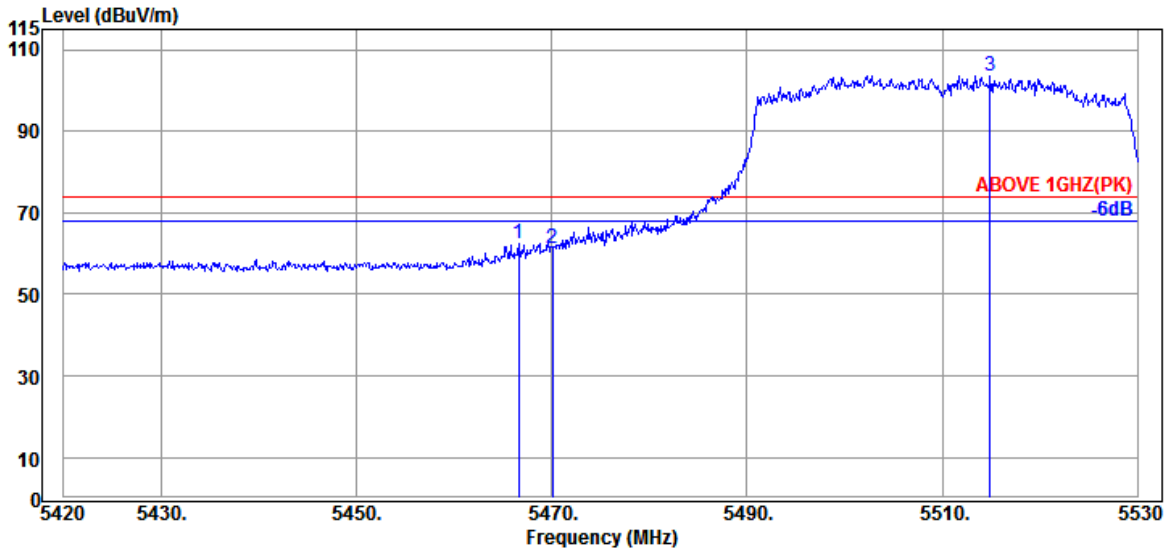

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.640	33.97	9.20	31.63	51.00	62.54	74.00	11.46	Peak
5470.050	33.97	9.20	31.63	49.60	61.14	74.00	12.86	Peak
@ 5514.930	34.13	9.24	31.64	91.82	103.55	---	---	Peak

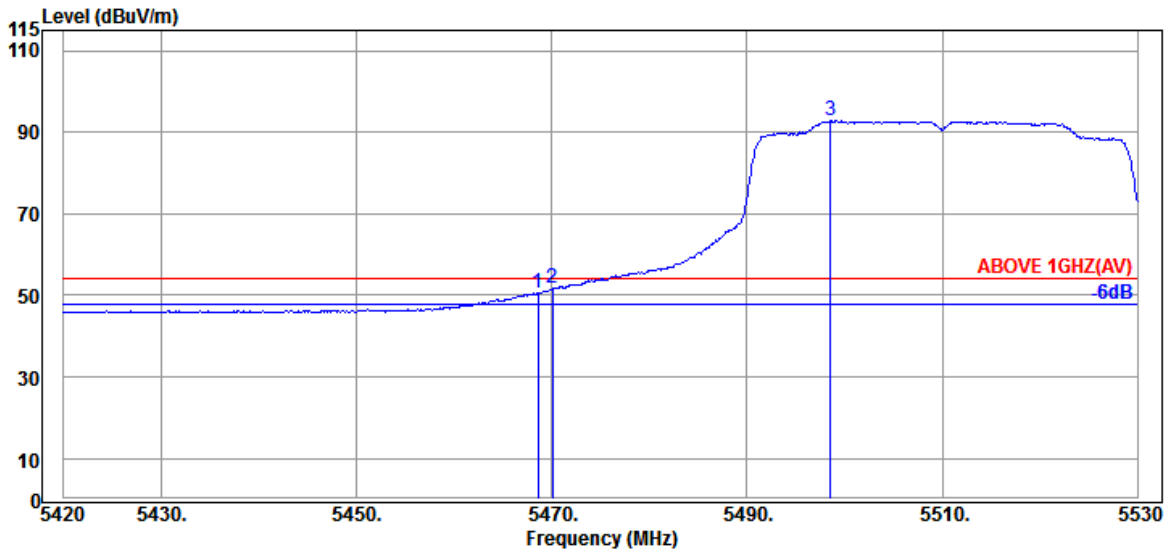


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	33.97	9.20	31.63	39.11	50.65	54.00	3.35	Average
5470.050	33.97	9.20	31.63	40.06	51.60	54.00	2.40	Average
@ 5498.540	34.10	9.23	31.63	81.14	92.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

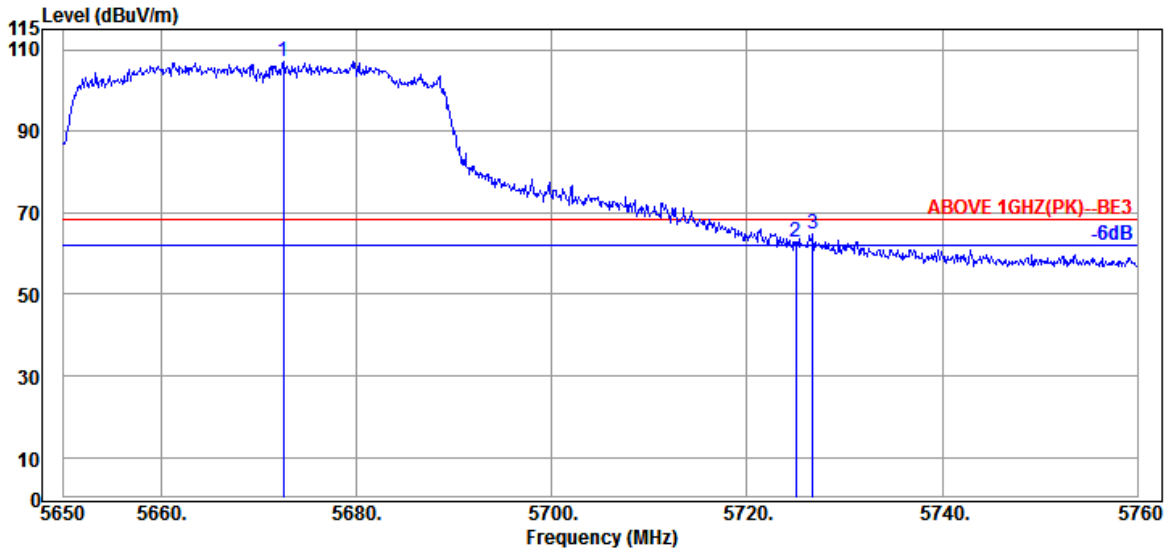

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.550	34.30	9.37	31.72	95.12	107.07	---	---	Peak
5725.020	34.50	9.42	31.74	50.52	62.70	68.20	5.50	Peak
5726.780	34.50	9.42	31.75	52.60	64.77	68.20	3.43	Peak

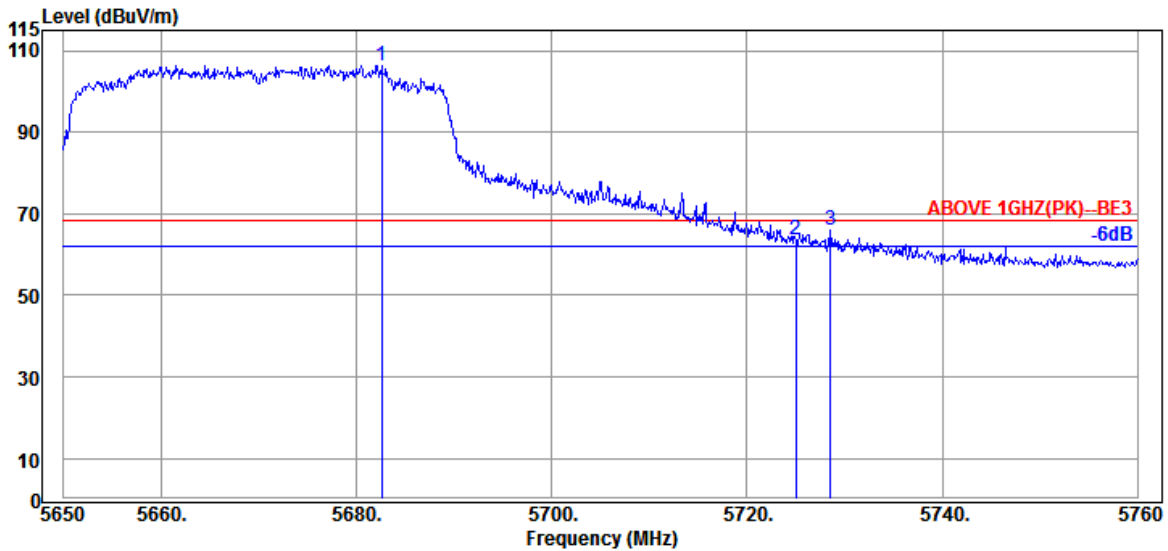


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.560	34.30	9.37	31.72	94.38	106.33	---	---	Peak
5725.020	34.50	9.42	31.74	51.61	63.79	68.20	4.41	Peak
5728.540	34.50	9.42	31.75	53.94	66.11	68.20	2.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

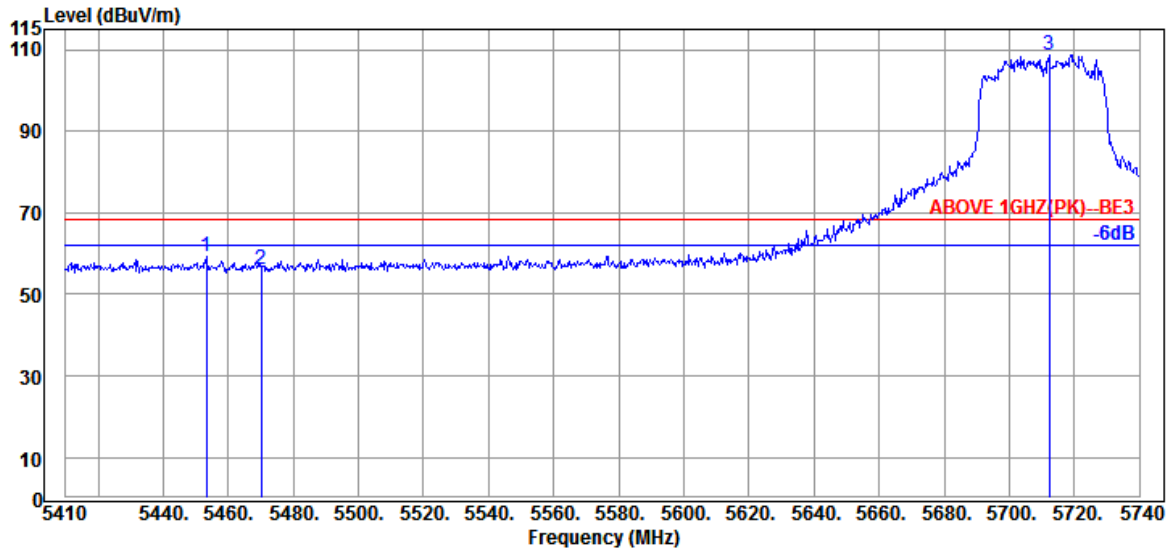

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	33.90	9.18	31.63	47.75	59.20	68.20	9.00	Peak
5470.060	33.97	9.20	31.63	44.73	56.27	68.20	11.93	Peak
@ 5712.280	34.40	9.40	31.74	96.73	108.79	---	---	Peak

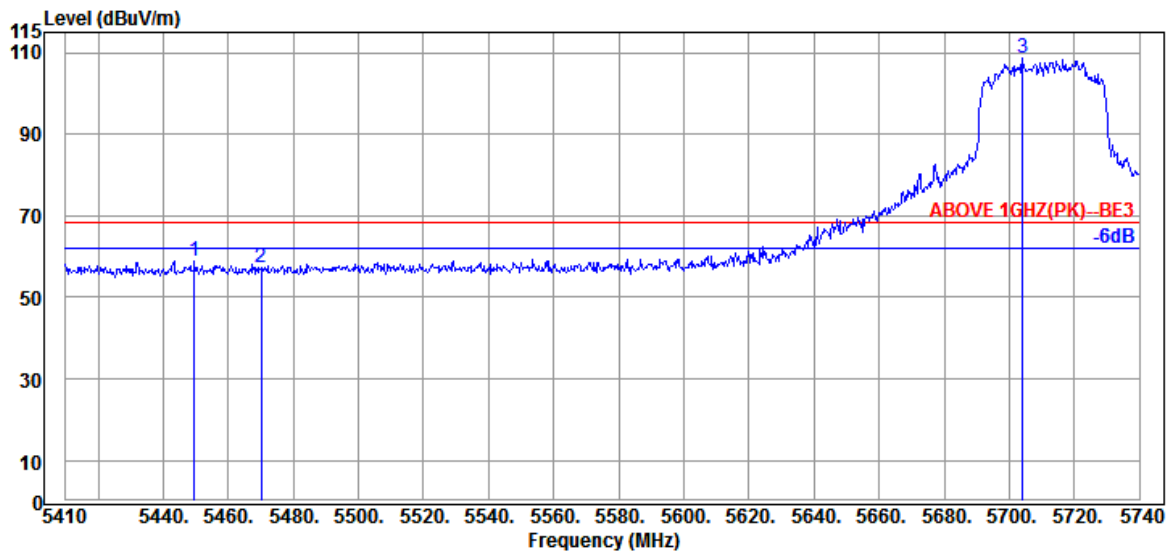


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.600	33.90	9.18	31.63	47.49	58.94	68.20	9.26	Peak
5470.060	33.97	9.20	31.63	45.87	57.41	68.20	10.79	Peak
@ 5704.030	34.30	9.40	31.73	96.67	108.64	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

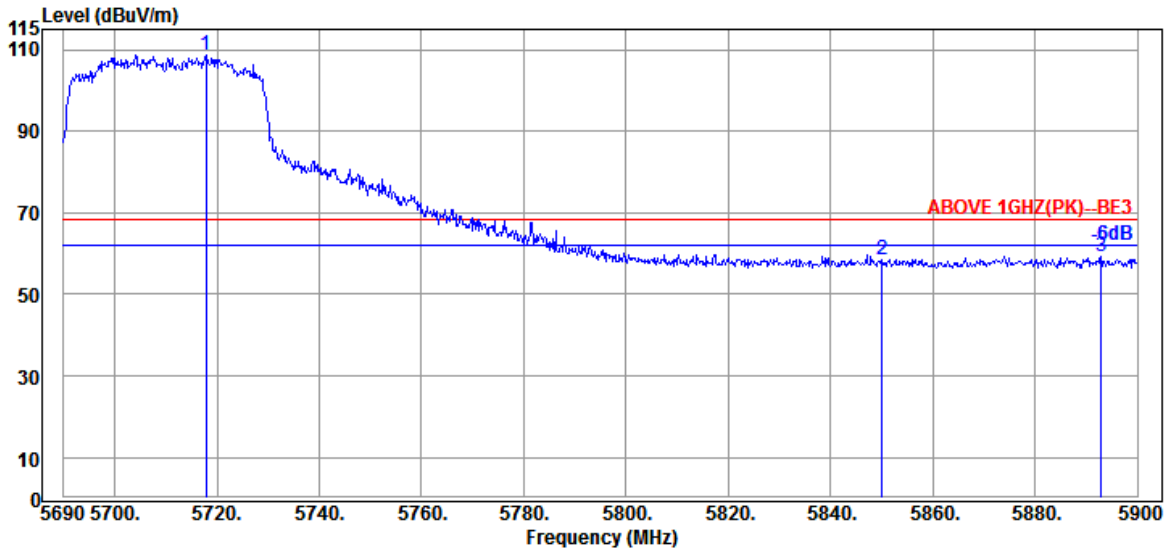

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.930	34.40	9.42	31.74	96.71	108.79	---	---	Peak
5850.020	35.00	9.52	31.80	45.91	58.63	68.20	9.57	Peak
5892.860	35.10	9.56	31.82	46.35	59.19	68.20	9.01	Peak

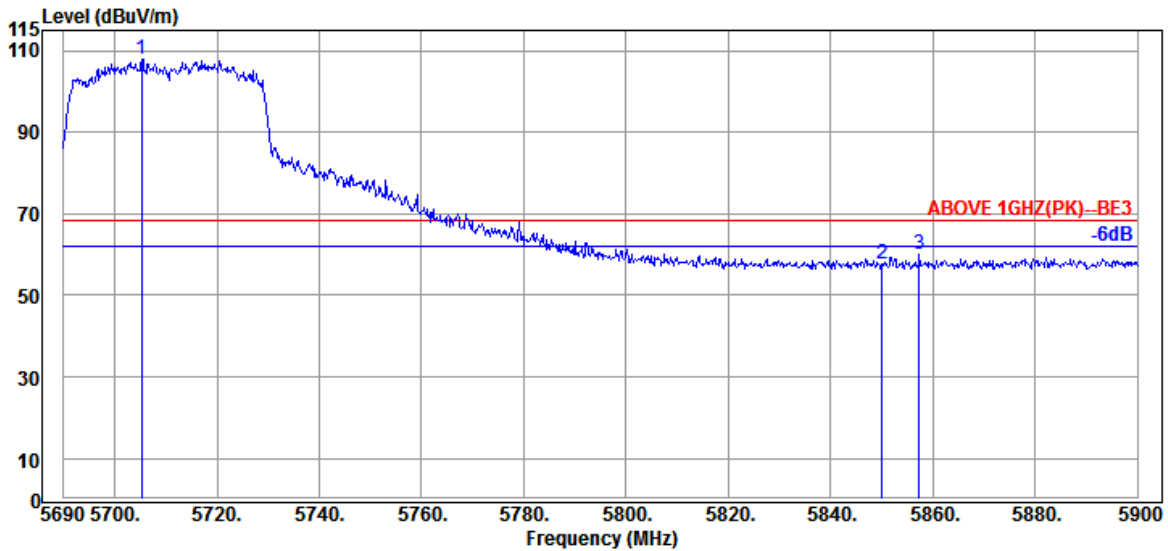


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.330	34.30	9.40	31.73	95.97	107.94	---	---	Peak
5850.020	35.00	9.52	31.80	45.12	57.84	68.20	10.36	Peak
5857.370	35.03	9.53	31.80	47.39	60.15	68.20	8.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

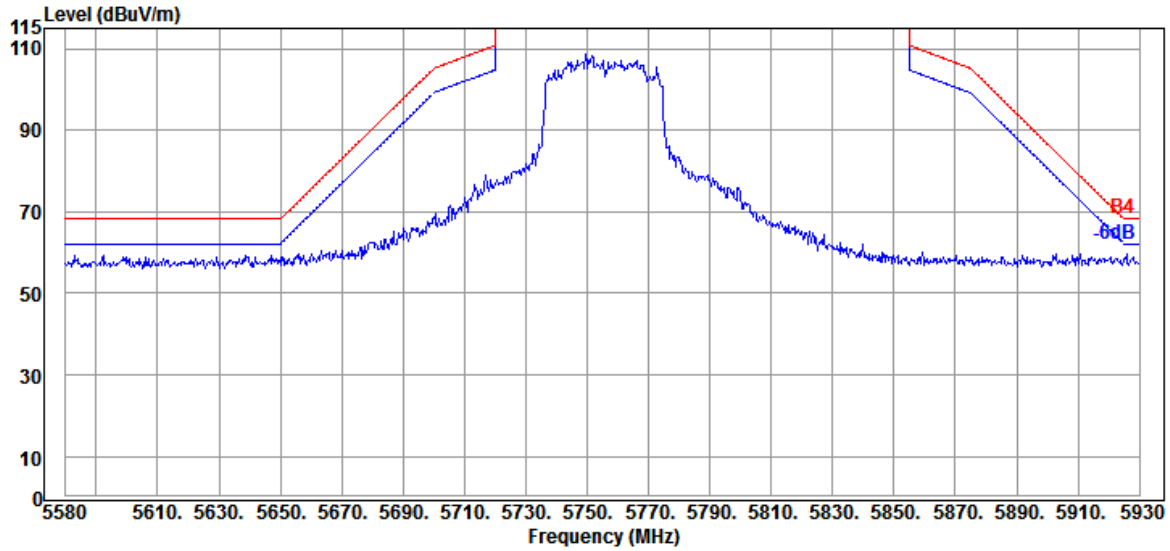


Antenna at Vertical Polarization

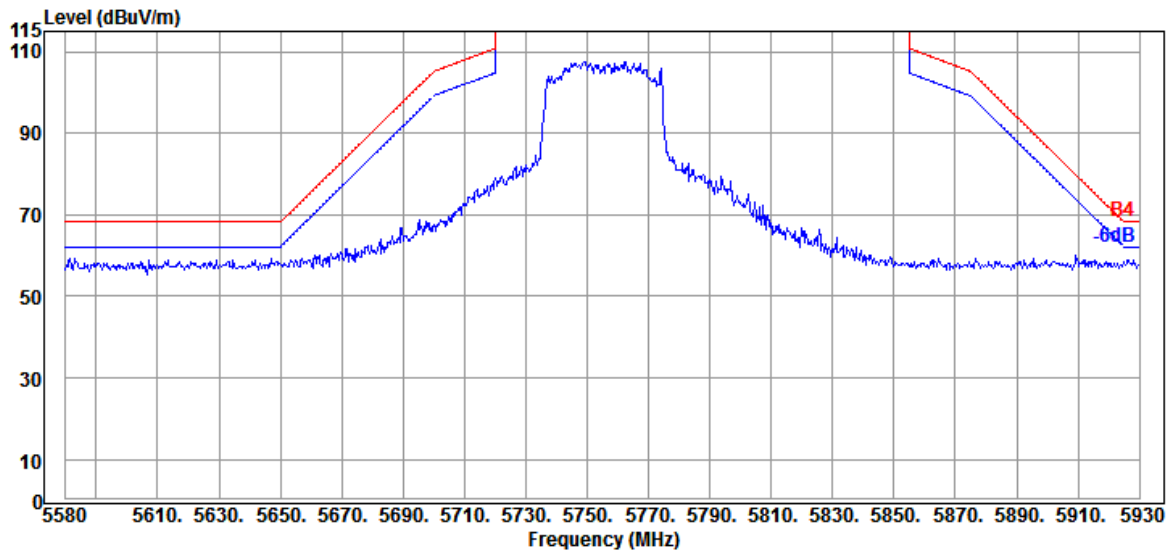


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

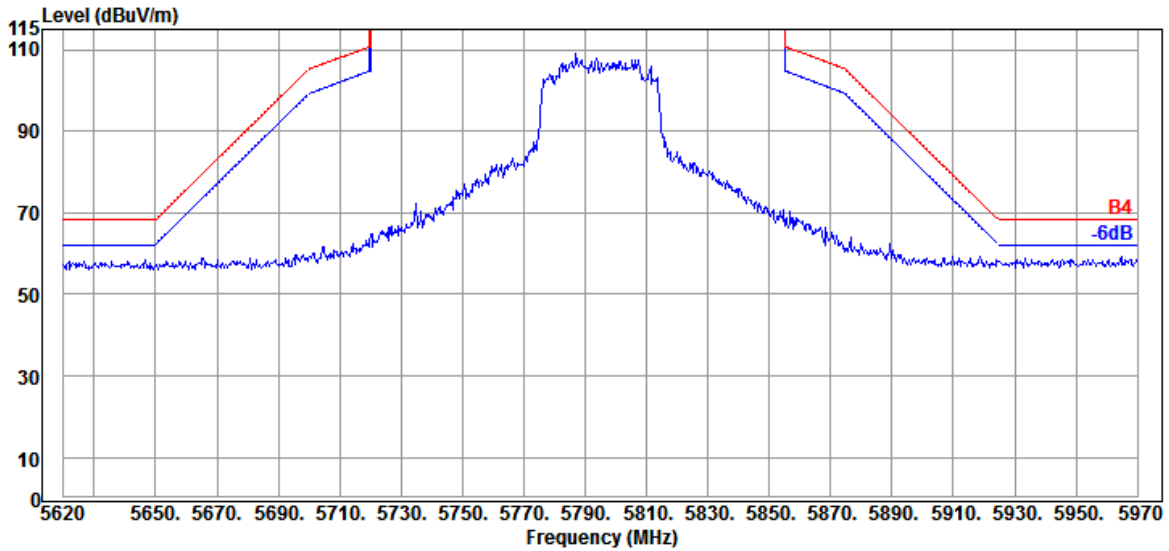

Antenna at Vertical Polarization

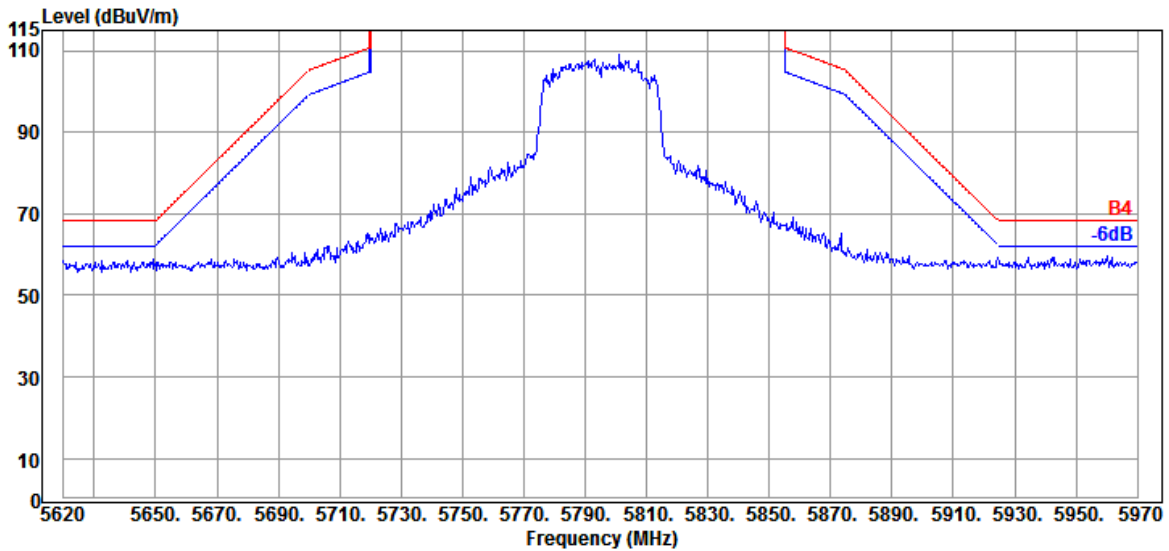


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

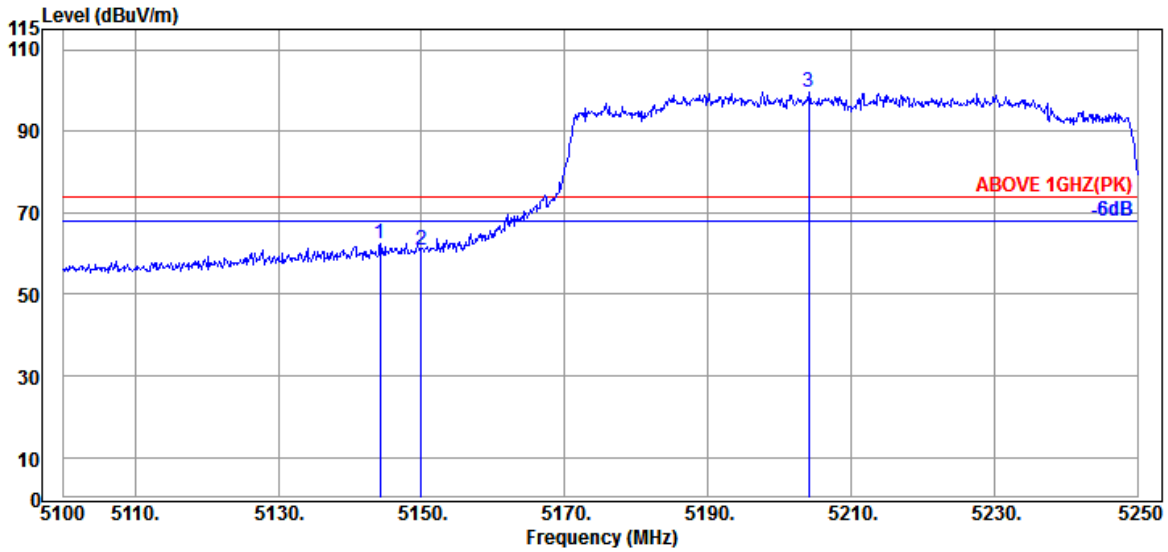

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.250	33.10	8.92	31.63	52.20	62.59	74.00	11.41	Peak
5149.950	33.10	8.92	31.63	50.49	60.88	74.00	13.12	Peak
@ 5204.100	33.17	8.96	31.63	89.28	99.78	---	---	Peak

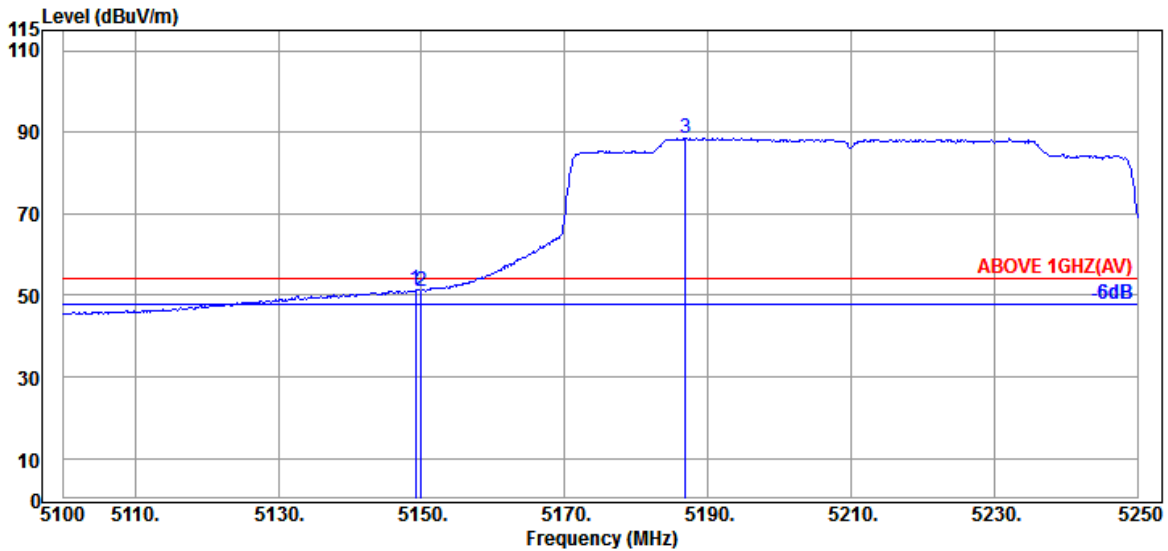


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.10	8.92	31.63	41.01	51.40	54.00	2.60	Average
5149.950	33.10	8.92	31.63	40.63	51.02	54.00	2.98	Average
@ 5186.850	33.20	8.95	31.63	77.94	88.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

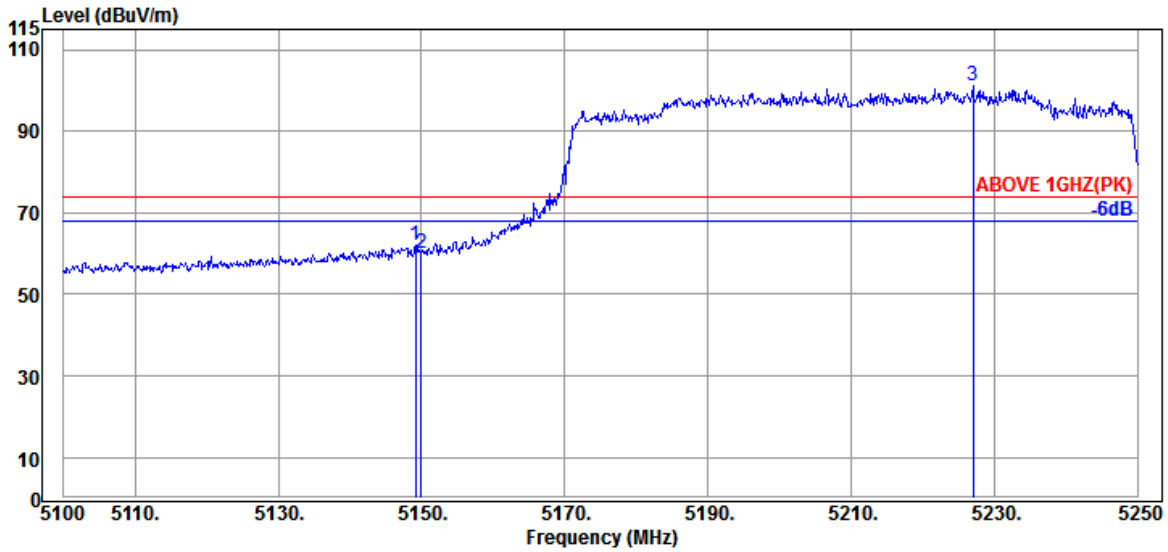

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.10	8.92	31.63	51.53	61.92	74.00	12.08	Peak
5149.950	33.10	8.92	31.63	49.84	60.23	74.00	13.77	Peak
@ 5227.050	33.15	8.99	31.63	90.49	101.00	---	---	Peak

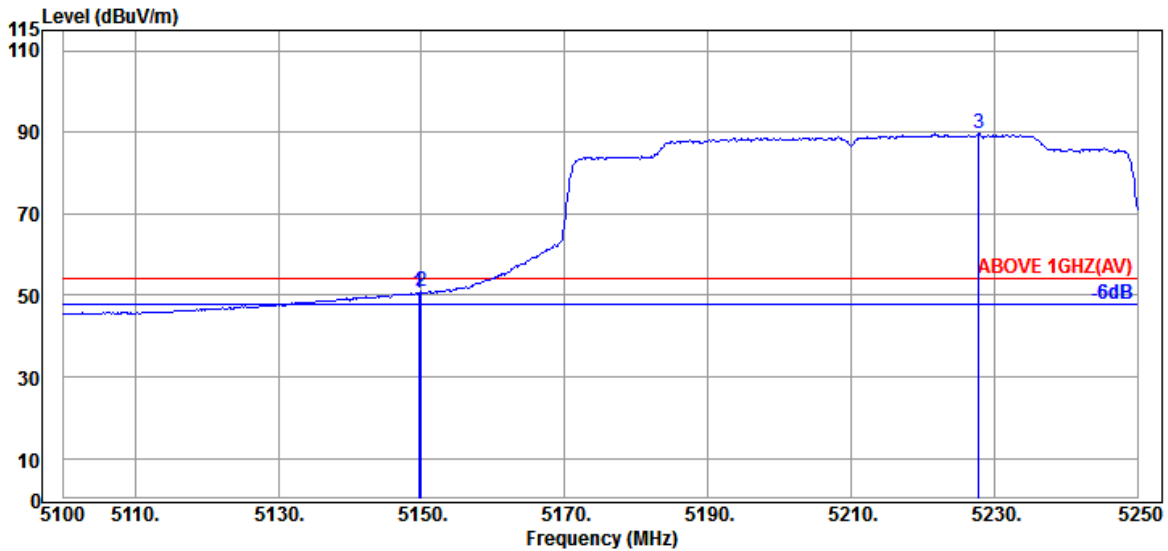


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.10	8.92	31.63	40.32	50.71	54.00	3.29	Average
5149.950	33.10	8.92	31.63	40.43	50.82	54.00	3.18	Average
@ 5227.800	33.15	8.99	31.63	79.06	89.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

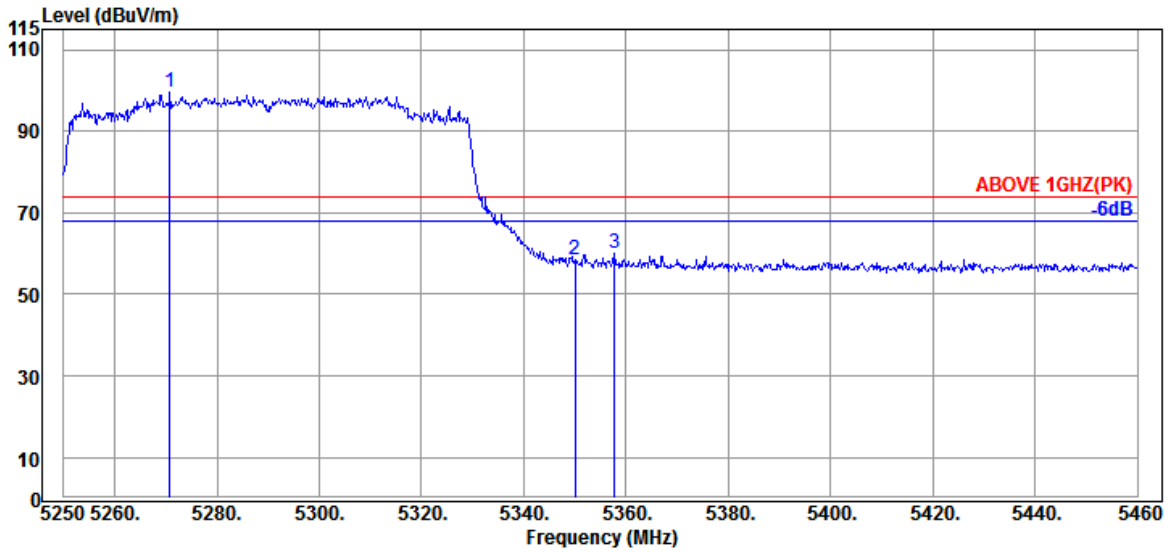

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.790	33.13	9.02	31.63	88.93	99.45	---	---	Peak
5349.960	33.50	9.10	31.63	47.47	58.44	74.00	15.56	Peak
5357.730	33.57	9.10	31.63	48.98	60.02	74.00	13.98	Peak

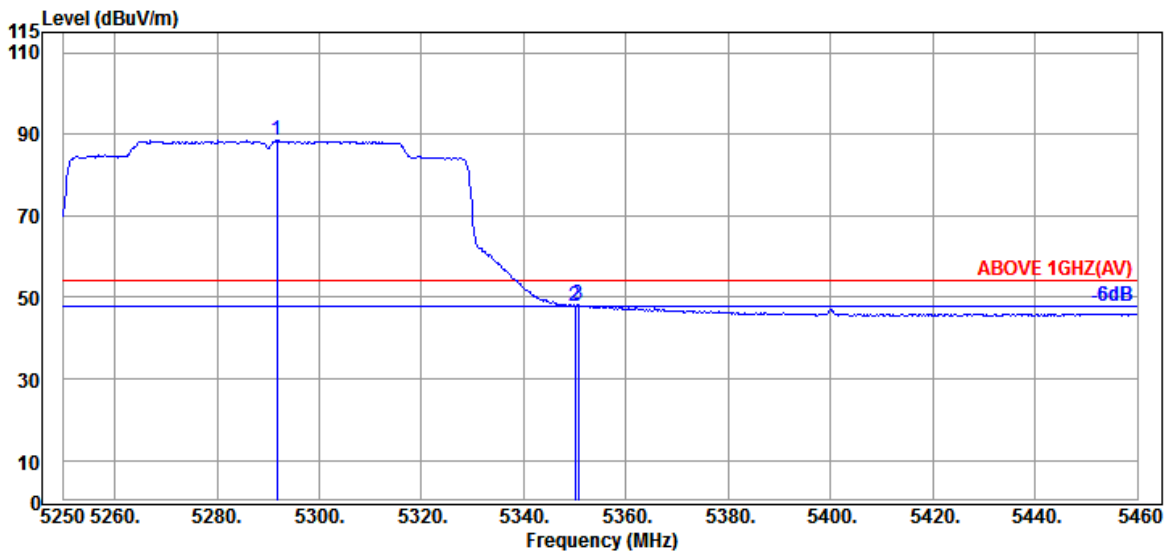


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.790	33.17	9.04	31.63	77.97	88.55	---	---	Average
5349.960	33.50	9.10	31.63	37.03	48.00	54.00	6.00	Average
5350.590	33.50	9.10	31.63	37.24	48.21	54.00	5.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

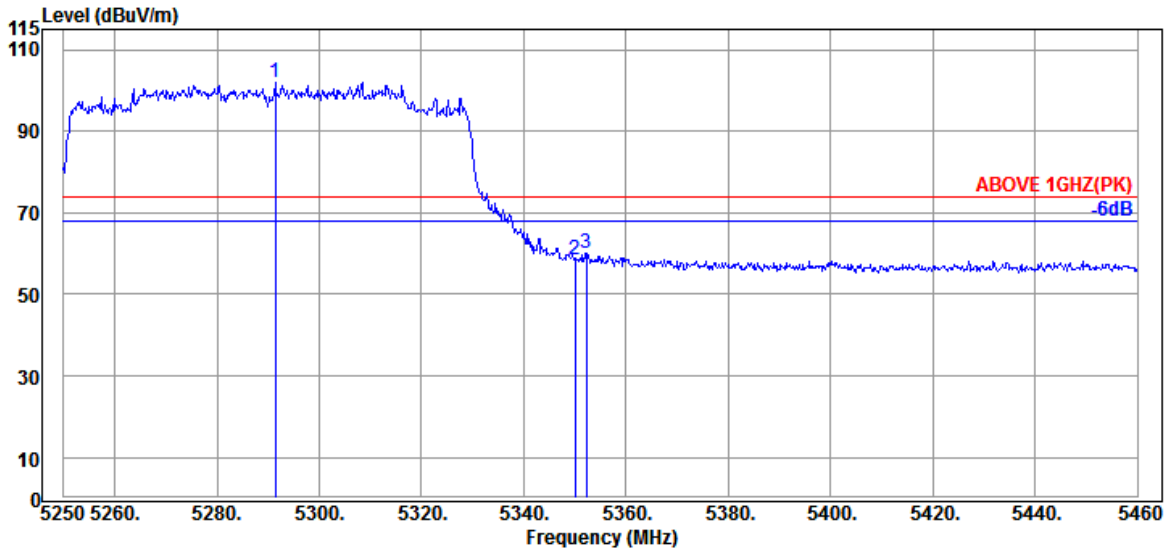

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.370	33.17	9.04	31.63	91.32	101.90	---	---	Peak
5349.960	33.50	9.10	31.63	47.55	58.52	74.00	15.48	Peak
5352.270	33.50	9.10	31.63	49.10	60.07	74.00	13.93	Peak

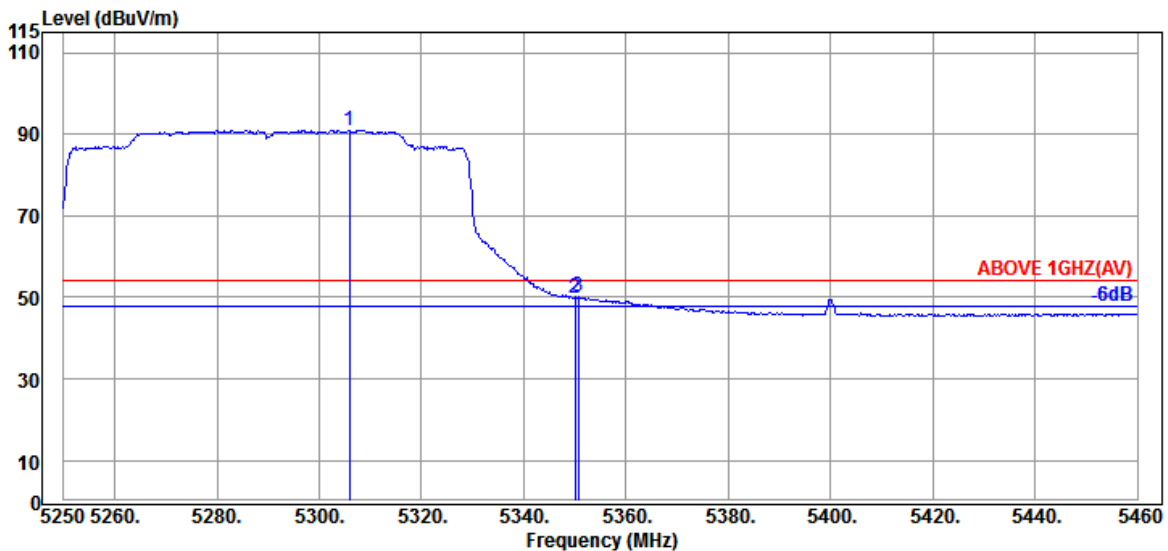


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.860	33.20	9.05	31.63	80.36	90.98	---	---	Average
5349.960	33.50	9.10	31.63	38.77	49.74	54.00	4.26	Average
5350.590	33.50	9.10	31.63	39.16	50.13	54.00	3.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

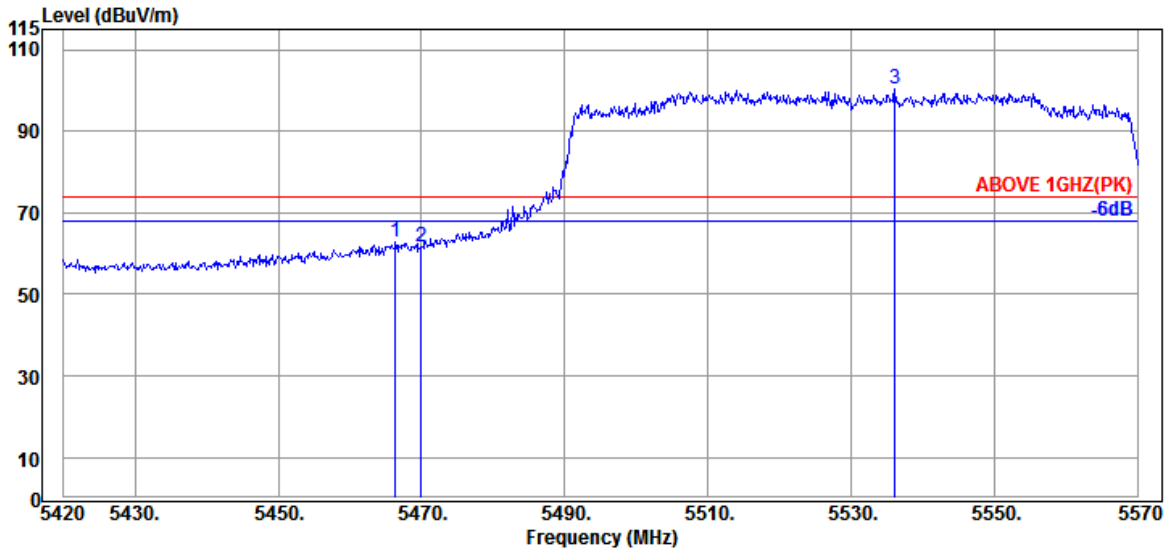

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.350	33.97	9.20	31.63	51.33	62.87	74.00	11.13	Peak
5469.950	33.97	9.20	31.63	50.04	61.58	74.00	12.42	Peak
@ 5536.100	34.17	9.26	31.65	88.68	100.46	---	---	Peak

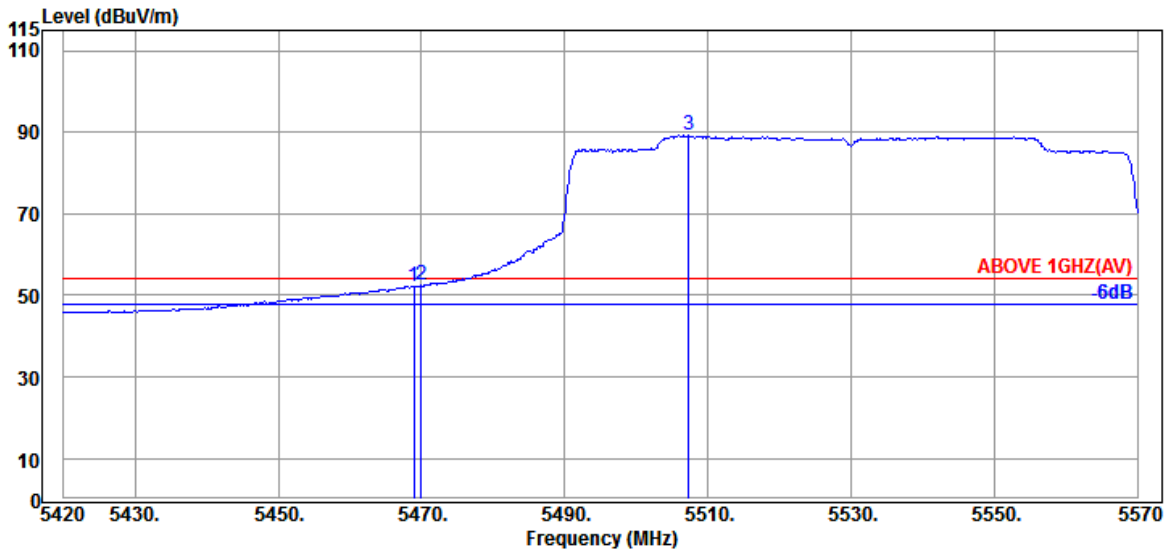


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	40.74	52.28	54.00	1.72	Average
5469.950	33.97	9.20	31.63	40.90	52.44	54.00	1.56	Average
@ 5507.300	34.10	9.23	31.64	77.55	89.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

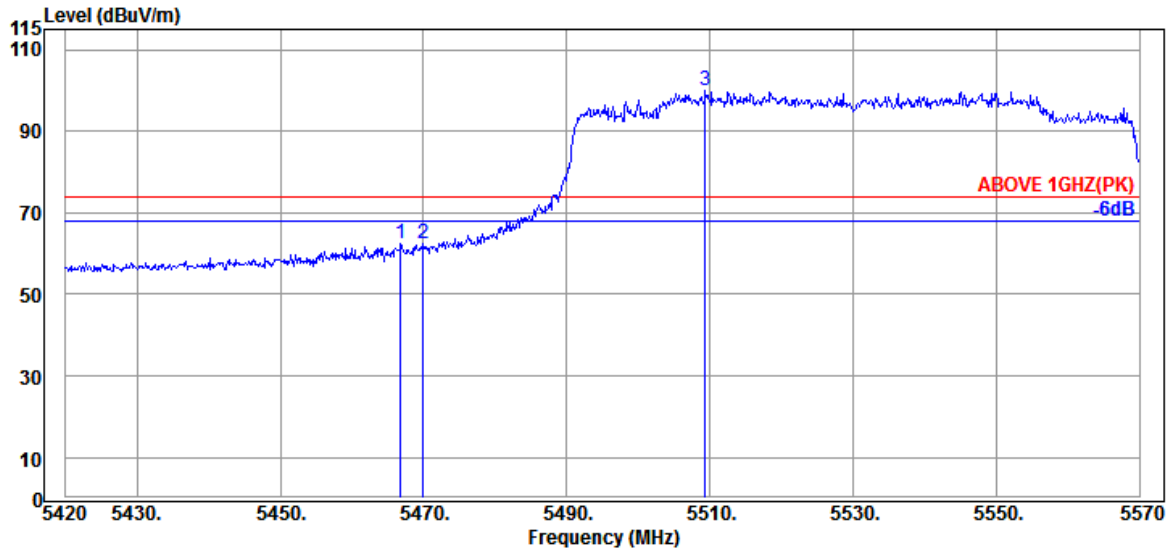

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	33.97	9.20	31.63	50.82	62.36	74.00	11.64	Peak
5469.950	33.97	9.20	31.63	50.72	62.26	74.00	11.74	Peak
@ 5509.400	34.10	9.23	31.64	88.25	99.94	---	---	Peak

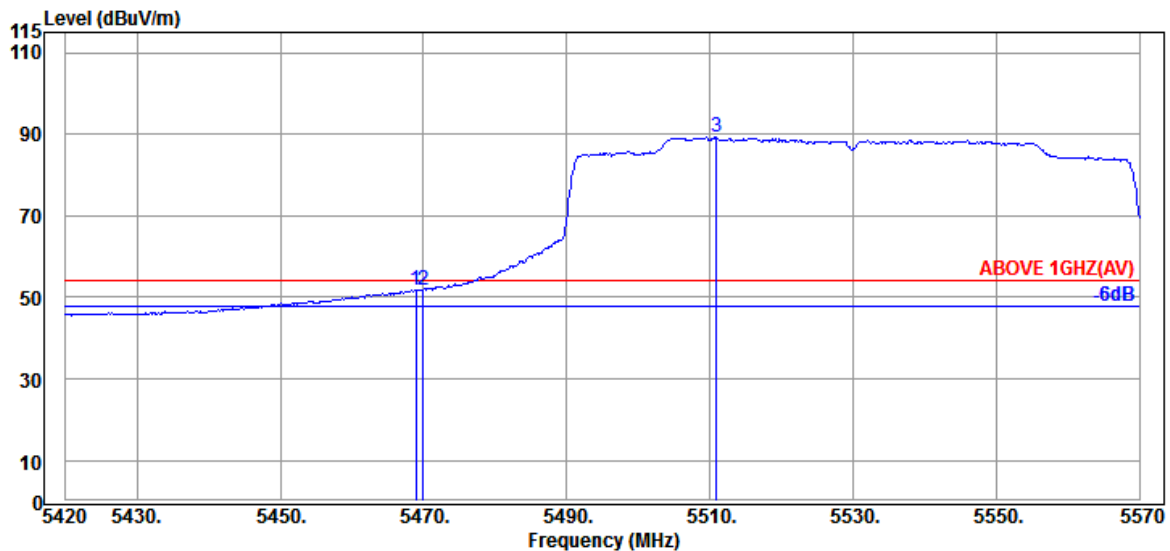


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	40.35	51.89	54.00	2.11	Average
5469.950	33.97	9.20	31.63	40.29	51.83	54.00	2.17	Average
@ 5510.900	34.10	9.23	31.64	77.50	89.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

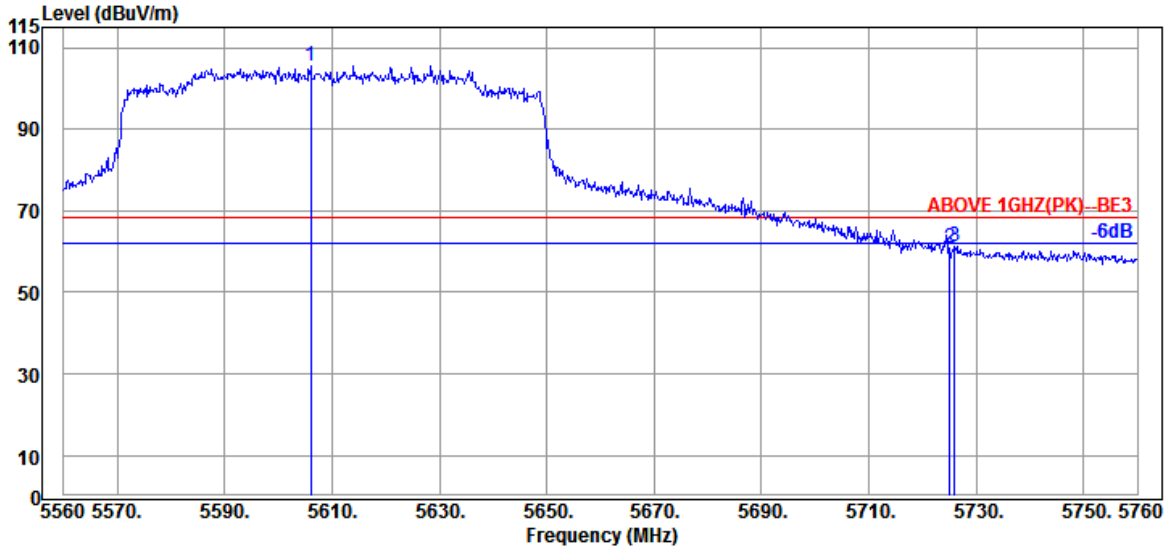

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5606.000	34.20	9.31	31.68	93.62	105.45	---	---	Peak
	5725.000	34.50	9.42	31.74	48.59	60.77	68.20	7.43	Peak
	5726.000	34.50	9.42	31.74	49.27	61.45	68.20	6.75	Peak

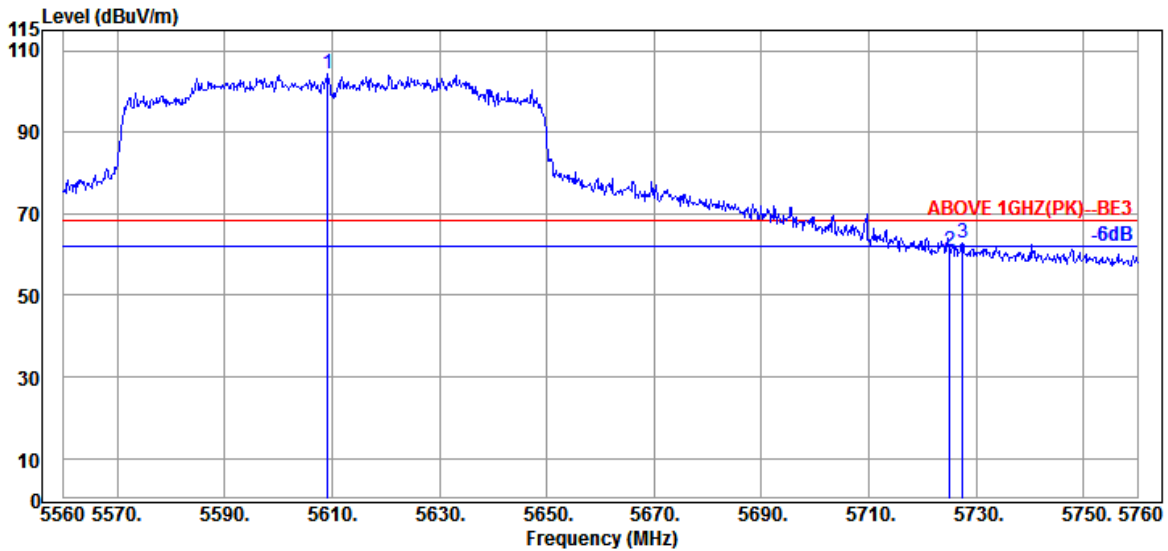


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5609.200	34.23	9.31	31.68	92.39	104.25	---	---	Peak
	5725.000	34.50	9.42	31.74	48.76	60.94	68.20	7.26	Peak
	5727.400	34.50	9.42	31.75	50.75	62.92	68.20	5.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

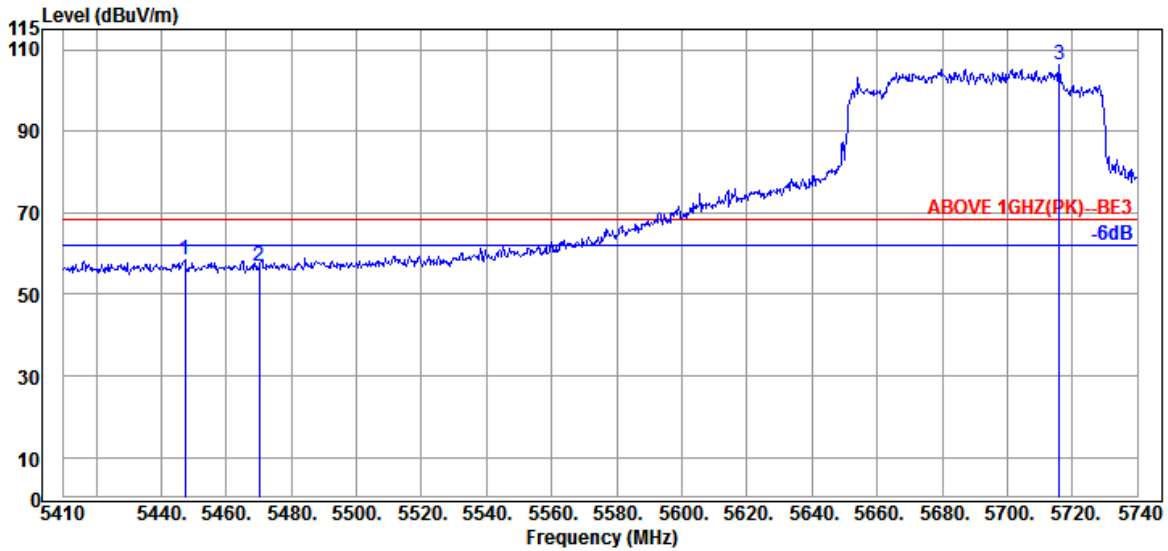

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.290	33.85	9.18	31.63	47.18	58.58	68.20	9.62	Peak
5470.060	33.97	9.20	31.63	45.28	56.82	68.20	11.38	Peak
@ 5715.910	34.40	9.40	31.74	94.15	106.21	---	---	Peak

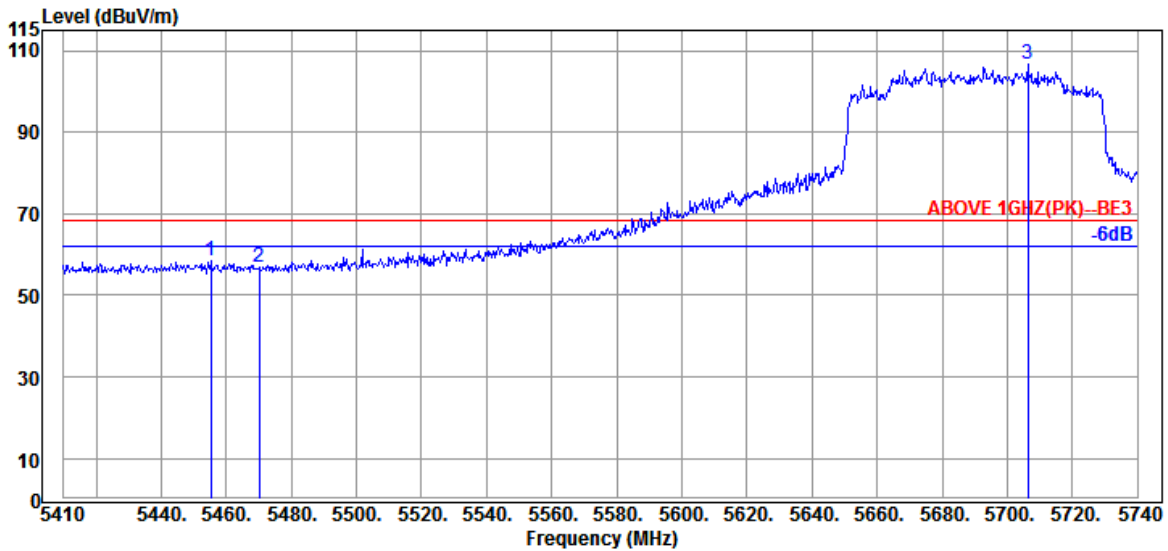


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.210	33.90	9.18	31.63	47.17	58.62	68.20	9.58	Peak
5470.060	33.97	9.20	31.63	45.22	56.76	68.20	11.44	Peak
@ 5706.340	34.40	9.40	31.73	94.63	106.70	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

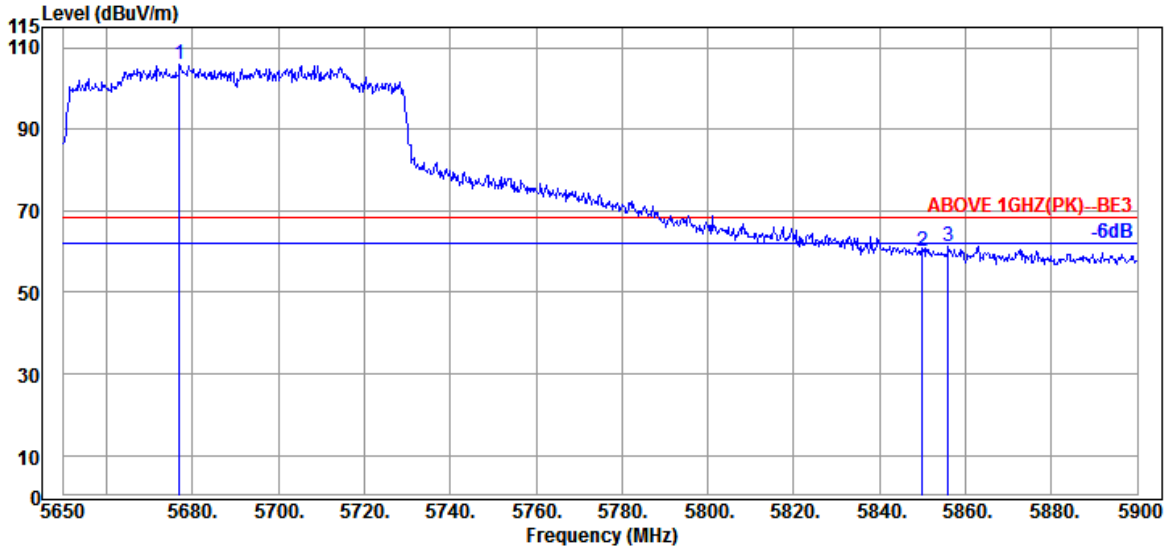

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5677.000	34.30	9.37	31.72	94.00	105.95	---	---	Peak
	5850.000	35.00	9.52	31.80	47.20	59.92	68.20	8.28	Peak
	5856.000	35.03	9.53	31.80	48.64	61.40	68.20	6.80	Peak

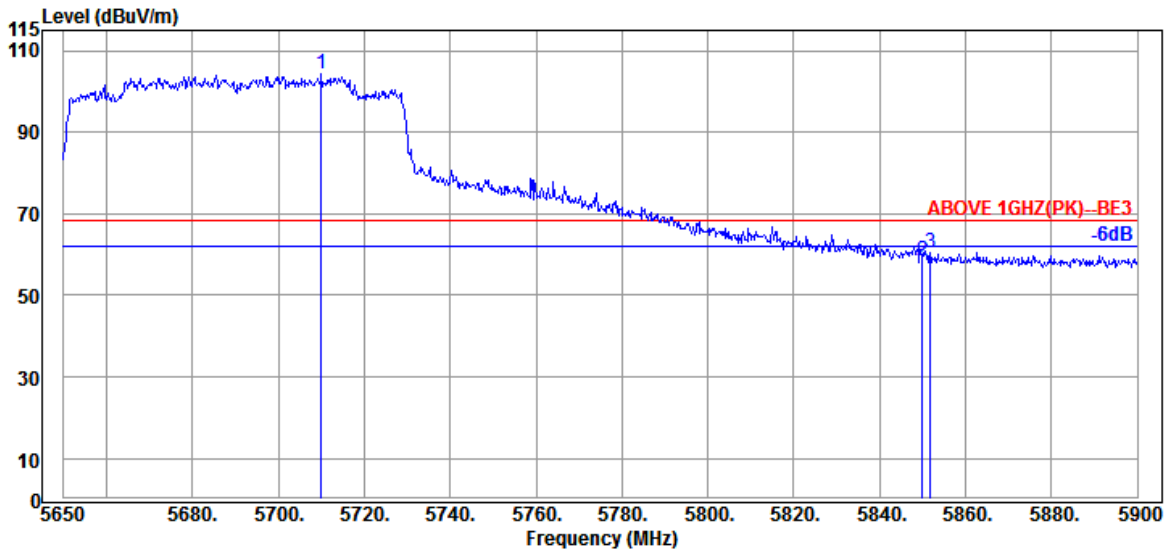


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5710.000	34.40	9.40	31.74	92.24	104.30	---	---	Peak
	5850.000	35.00	9.52	31.80	45.61	58.33	68.20	9.87	Peak
	5851.750	35.00	9.52	31.80	47.74	60.46	68.20	7.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

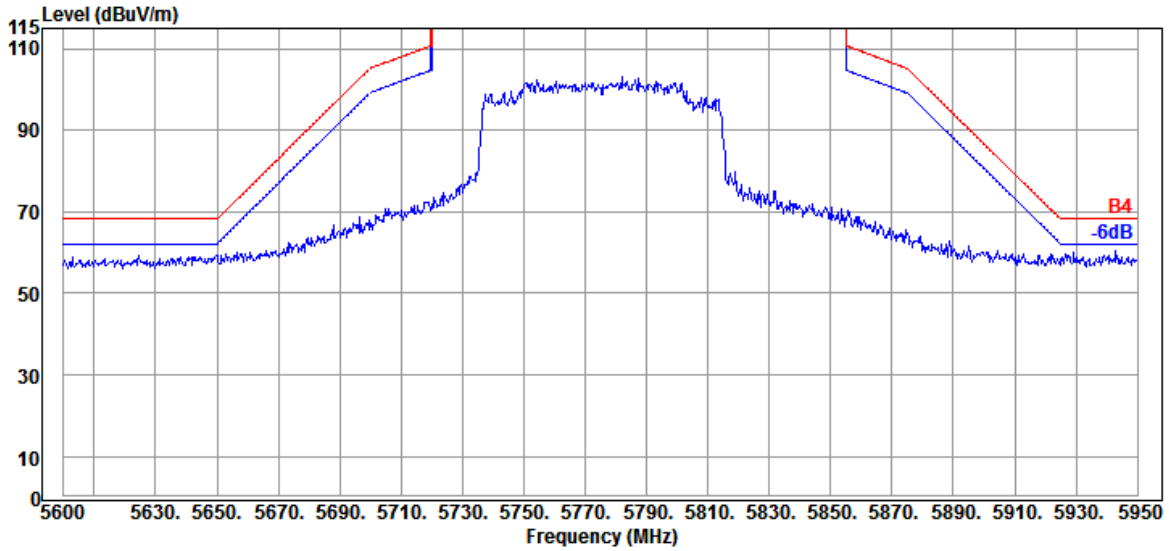

Antenna at Vertical Polarization

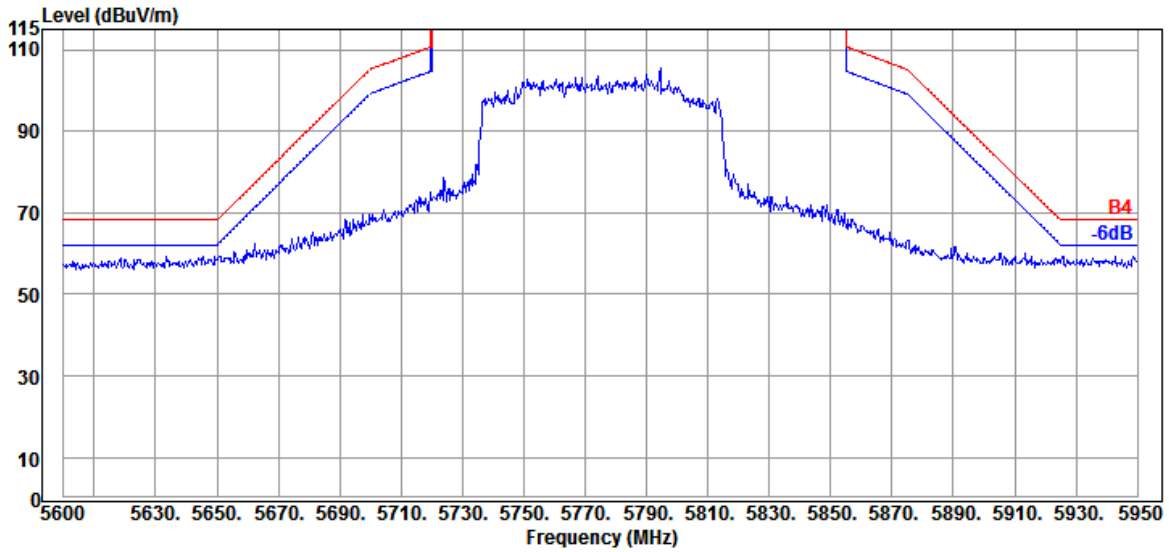


Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

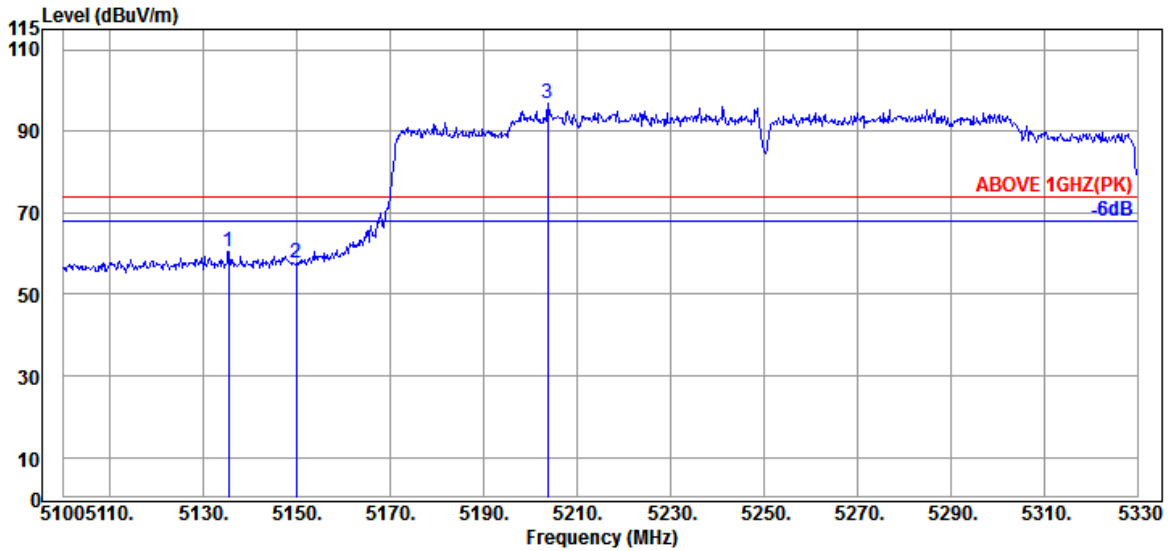

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.420	33.07	8.91	31.63	50.27	60.62	74.00	13.38	Peak
5149.910	33.10	8.92	31.63	47.50	57.89	74.00	16.11	Peak
@ 5203.730	33.17	8.96	31.63	86.13	96.63	---	---	Peak

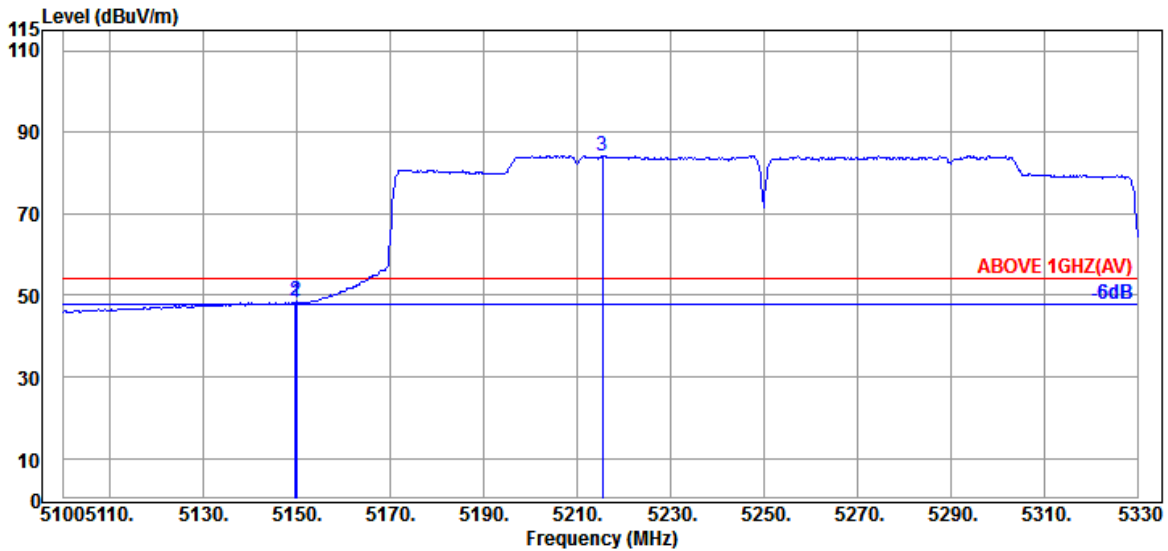


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	33.10	8.92	31.63	37.87	48.26	54.00	5.74	Average
5149.910	33.10	8.92	31.63	38.21	48.60	54.00	5.40	Average
@ 5215.460	33.17	8.98	31.63	73.64	84.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

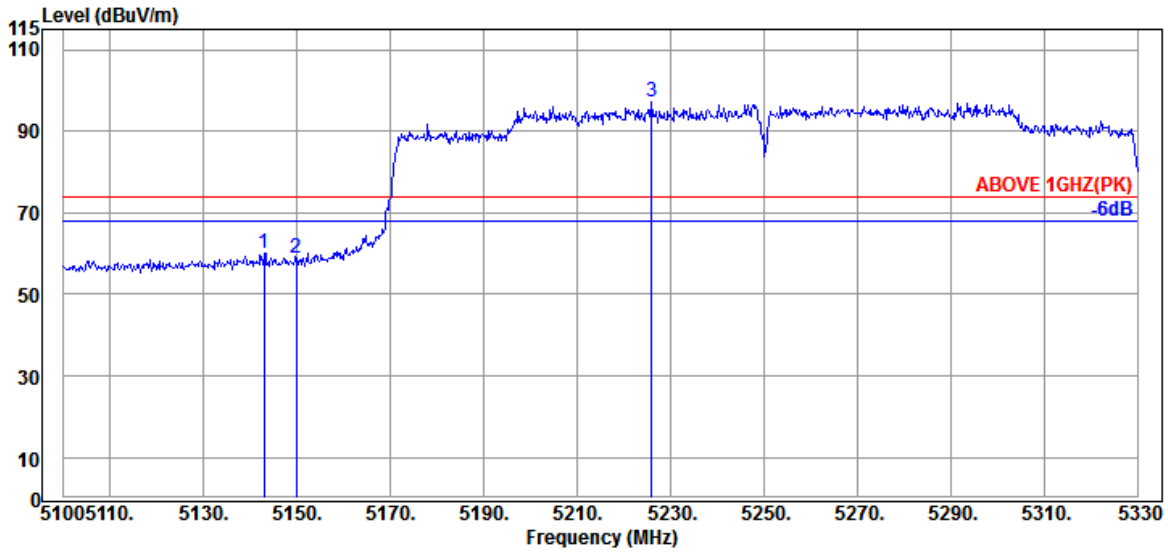

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.010	33.10	8.92	31.63	49.75	60.14	74.00	13.86	Peak
5149.910	33.10	8.92	31.63	48.30	58.69	74.00	15.31	Peak
@ 5226.040	33.15	8.99	31.63	86.83	97.34	---	---	Peak

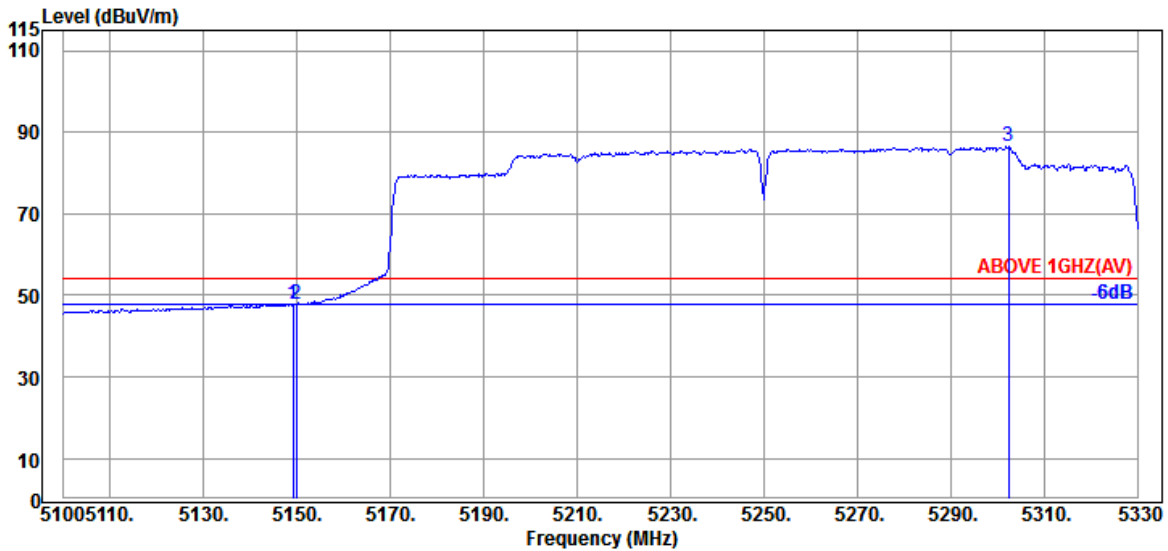


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	33.10	8.92	31.63	37.49	47.88	54.00	6.12	Average
5149.910	33.10	8.92	31.63	37.38	47.77	54.00	6.23	Average
@ 5302.400	33.20	9.05	31.63	75.84	86.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

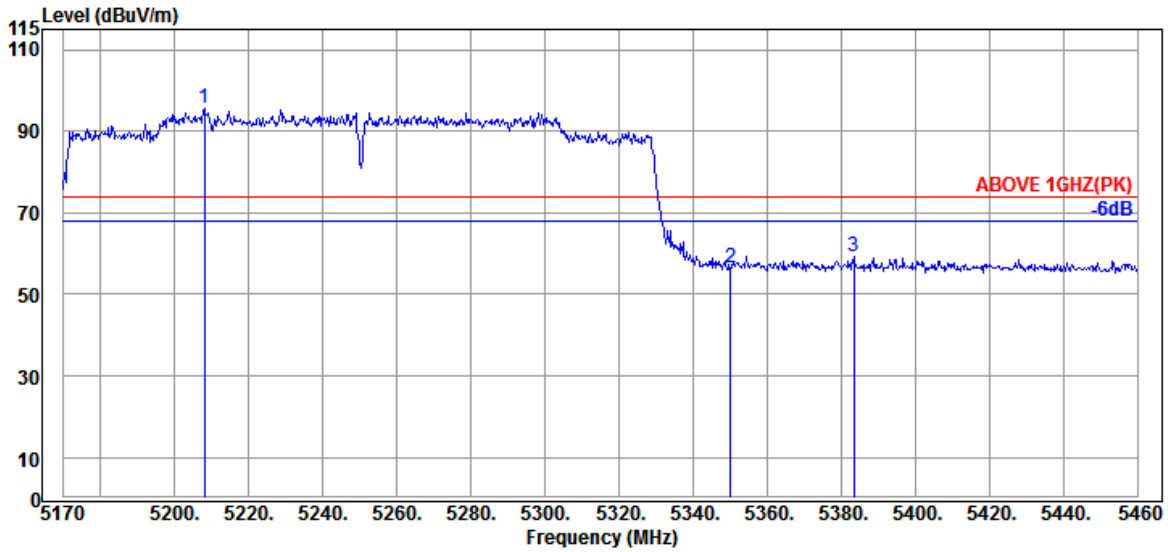

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5207.990	33.17	8.98	31.63	84.97	95.49	---	---	Peak
5350.090	33.50	9.10	31.63	45.56	56.53	74.00	17.47	Peak
5383.440	33.63	9.13	31.63	48.15	59.28	74.00	14.72	Peak

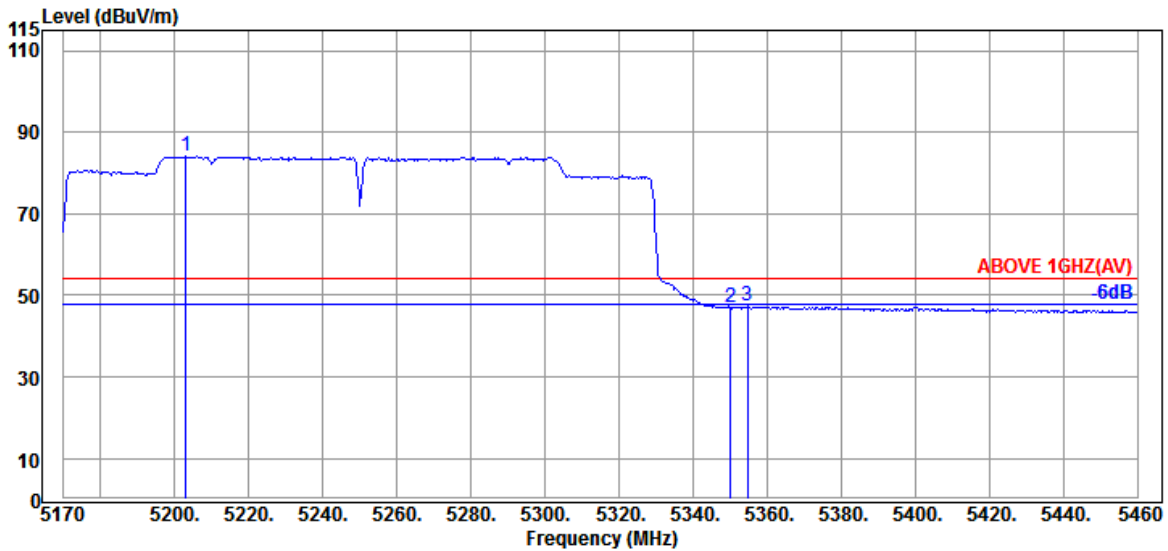


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5203.060	33.17	8.96	31.63	73.57	84.07	---	---	Average
5350.090	33.50	9.10	31.63	36.05	47.02	54.00	6.98	Average
5354.730	33.57	9.10	31.63	36.22	47.26	54.00	6.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

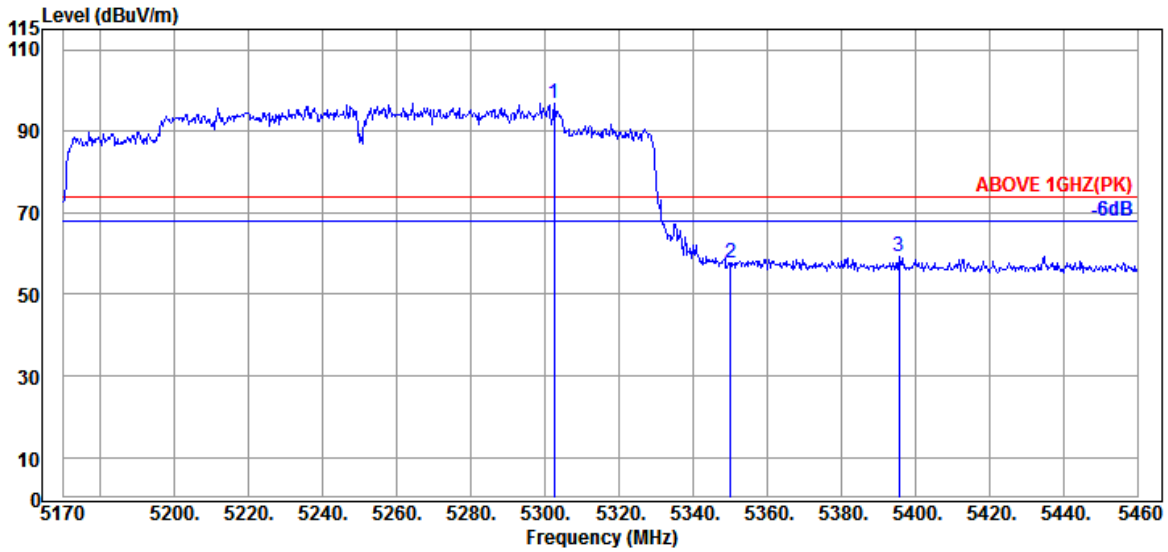

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.530	33.20	9.05	31.63	86.21	96.83	---	---	Peak
5350.090	33.50	9.10	31.63	46.53	57.50	74.00	16.50	Peak
5395.620	33.70	9.14	31.63	48.21	59.42	74.00	14.58	Peak

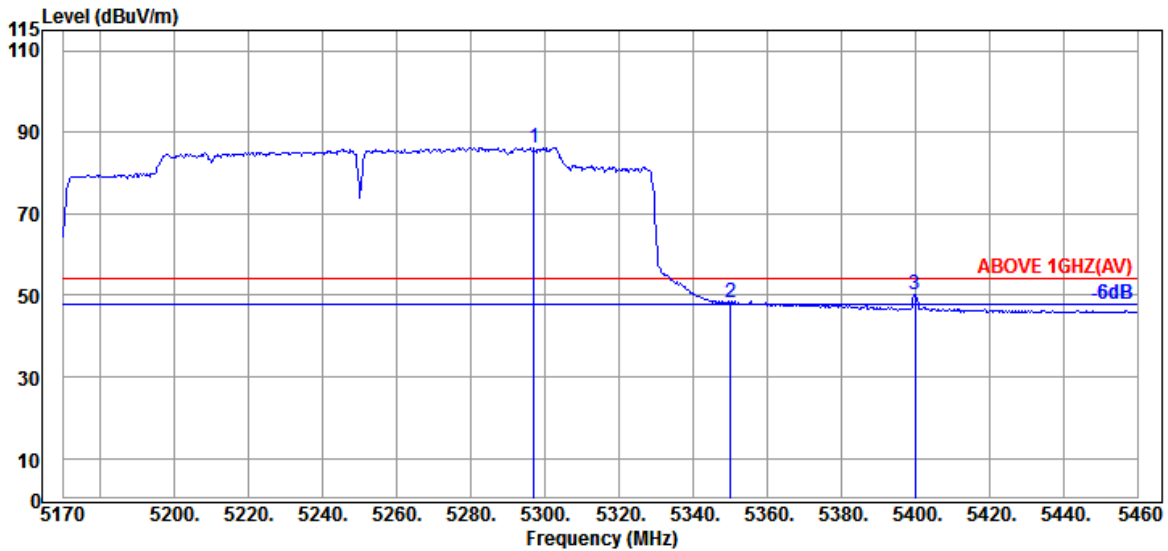


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.020	33.20	9.05	31.63	75.59	86.21	---	---	Average
5350.090	33.50	9.10	31.63	37.39	48.36	54.00	5.64	Average
5399.970	33.70	9.14	31.63	38.98	50.19	54.00	3.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

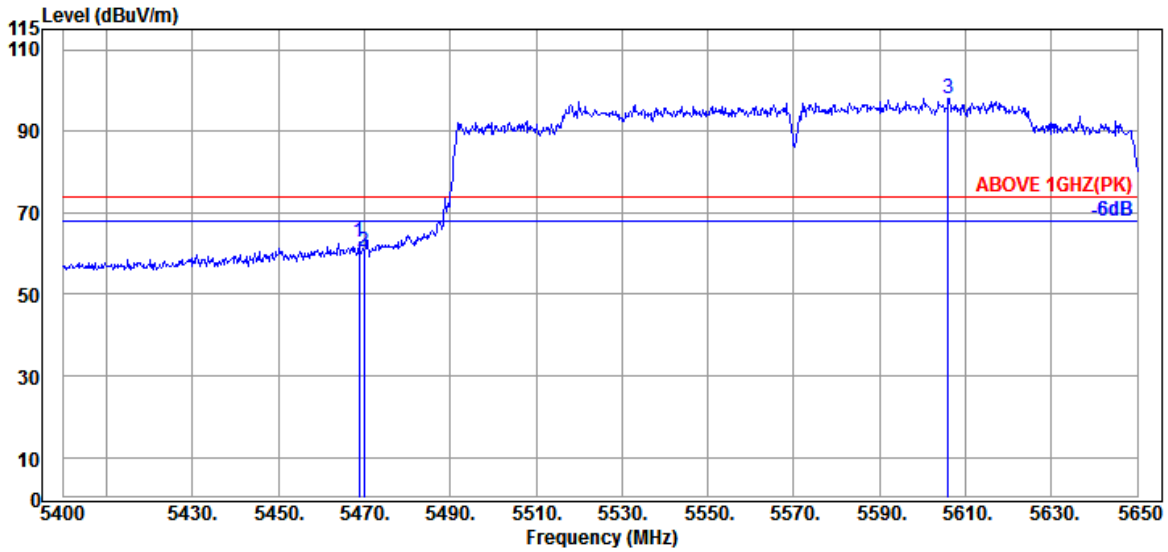

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	33.97	9.20	31.63	51.31	62.85	74.00	11.15	Peak
5470.000	33.97	9.20	31.63	48.81	60.35	74.00	13.65	Peak
@ 5606.000	34.20	9.31	31.68	86.12	97.95	---	---	Peak

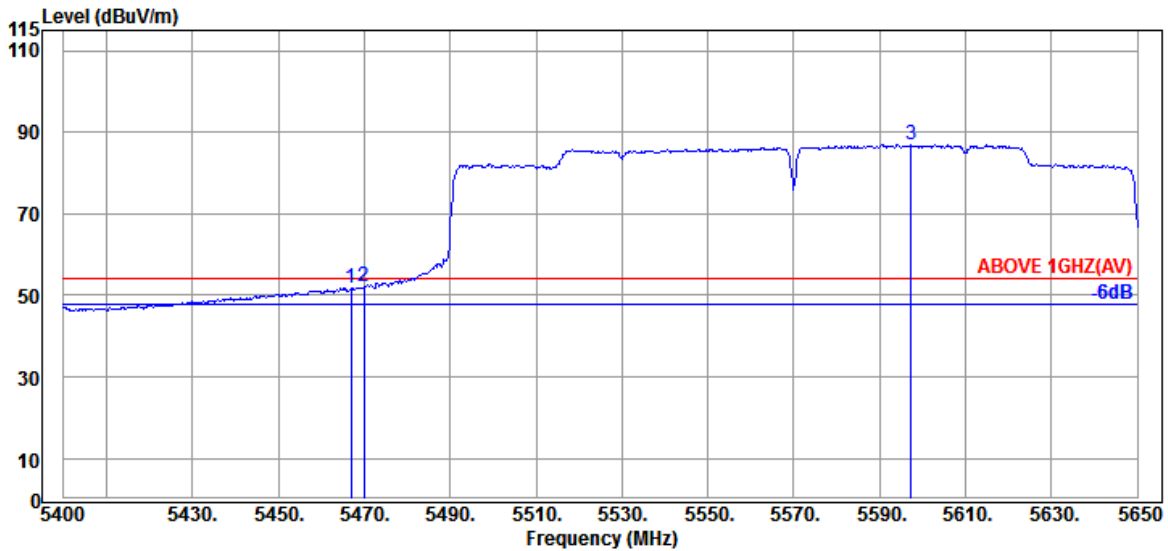


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	33.97	9.20	31.63	40.30	51.84	54.00	2.16	Average
5470.000	33.97	9.20	31.63	40.59	52.13	54.00	1.87	Average
@ 5597.250	34.20	9.30	31.68	75.09	86.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

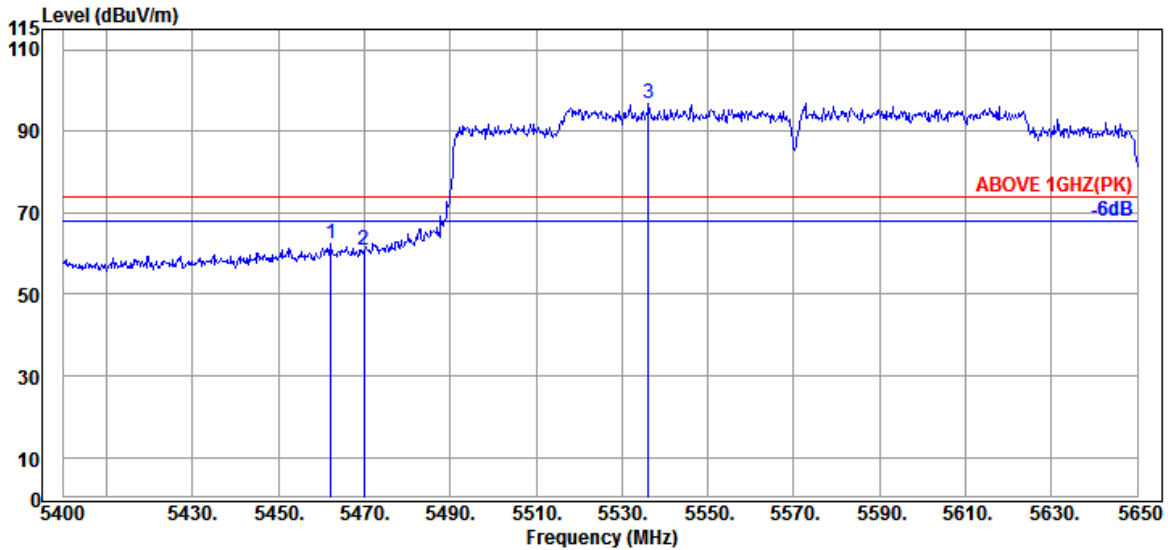

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.250	33.90	9.18	31.63	51.18	62.63	74.00	11.37	Peak
5470.000	33.97	9.20	31.63	49.42	60.96	74.00	13.04	Peak
@ 5536.250	34.17	9.26	31.65	85.21	96.99	---	---	Peak

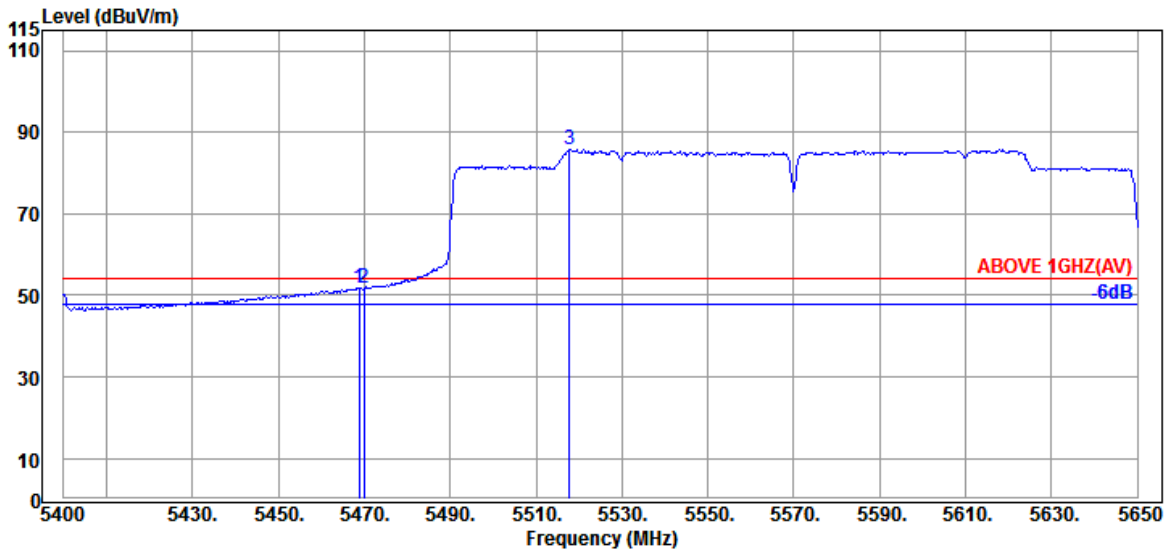


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	33.97	9.20	31.63	40.33	51.87	54.00	2.13	Average
5470.000	33.97	9.20	31.63	40.14	51.68	54.00	2.32	Average
@ 5517.750	34.13	9.24	31.64	74.12	85.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

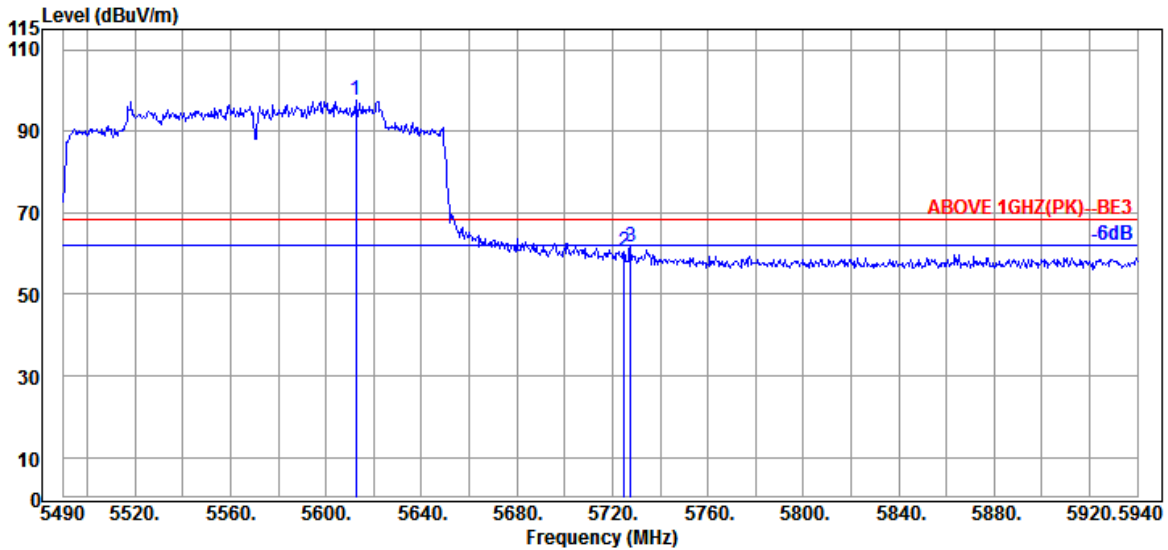

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.400	34.23	9.31	31.68	85.86	97.72	---	---	Peak
5724.900	34.50	9.42	31.74	48.19	60.37	68.20	7.83	Peak
5727.600	34.50	9.42	31.75	49.40	61.57	68.20	6.63	Peak

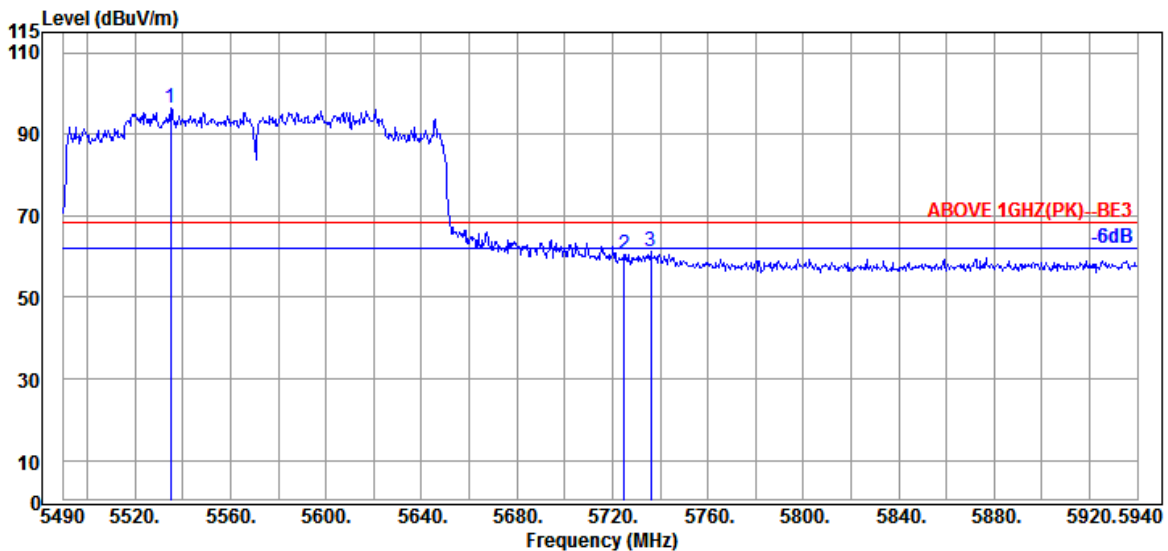


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5535.000	34.17	9.26	31.65	84.66	96.44	---	---	Peak
5724.900	34.50	9.42	31.74	48.42	60.60	68.20	7.60	Peak
5736.150	34.50	9.43	31.75	48.94	61.12	68.20	7.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

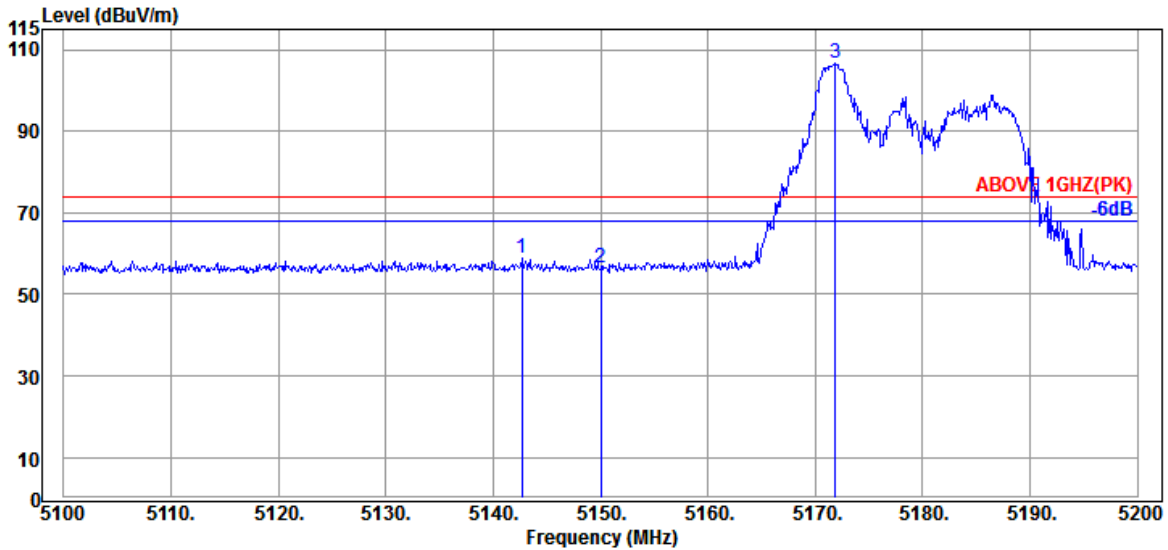

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.10	8.92	31.63	48.53	58.92	74.00	15.08	Peak
5150.000	33.10	8.92	31.63	46.10	56.49	74.00	17.51	Peak
@ 5171.900	33.17	8.94	31.63	96.27	106.75	---	---	Peak

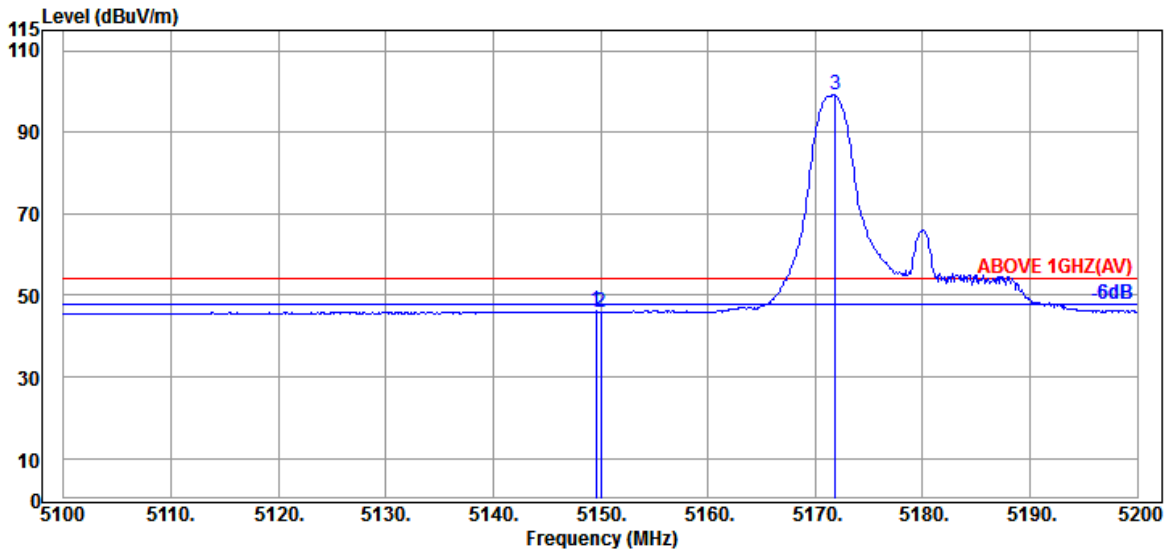


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	35.76	46.15	54.00	7.85	Average
5150.000	33.10	8.92	31.63	35.43	45.82	54.00	8.18	Average
@ 5171.900	33.17	8.94	31.63	88.78	99.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

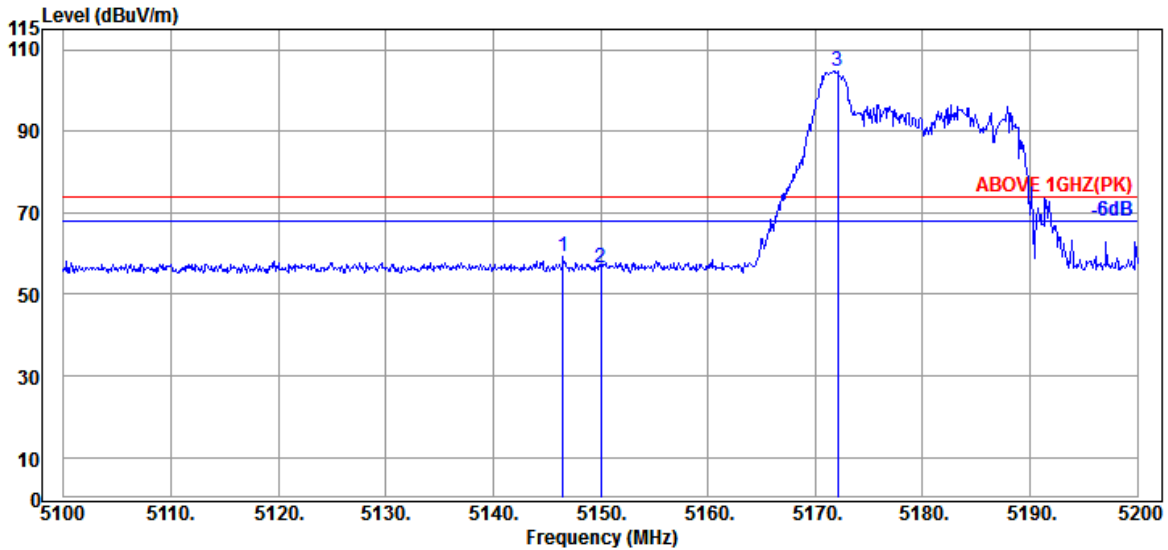

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.10	8.92	31.63	48.76	59.15	74.00	14.85	Peak
5150.000	33.10	8.92	31.63	46.27	56.66	74.00	17.34	Peak
@ 5172.100	33.17	8.94	31.63	94.39	104.87	---	---	Peak

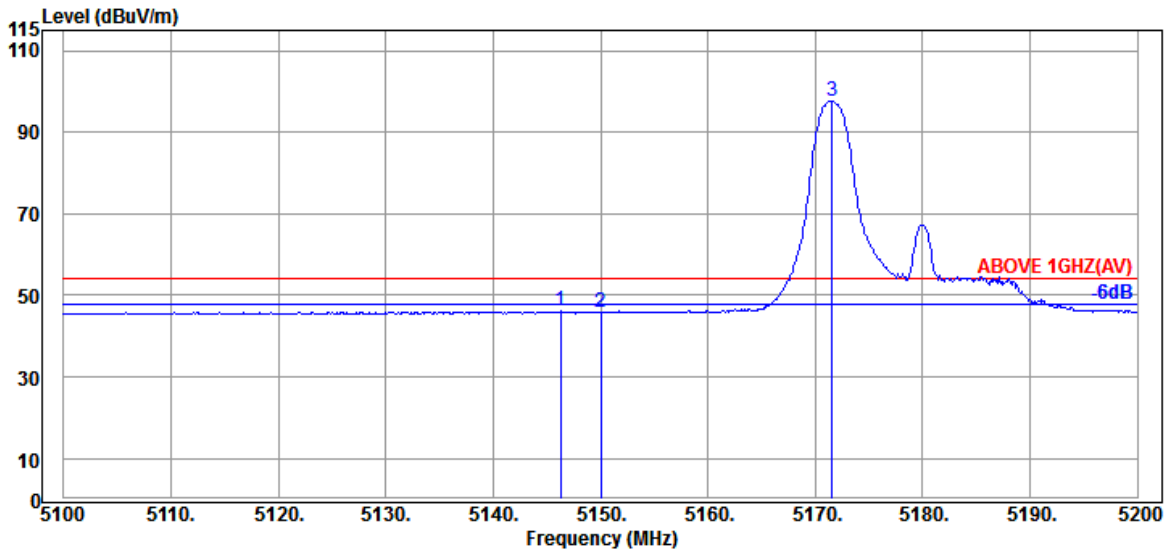


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.10	8.92	31.63	35.69	46.08	54.00	7.92	Average
5150.000	33.10	8.92	31.63	35.31	45.70	54.00	8.30	Average
@ 5171.600	33.17	8.94	31.63	87.09	97.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

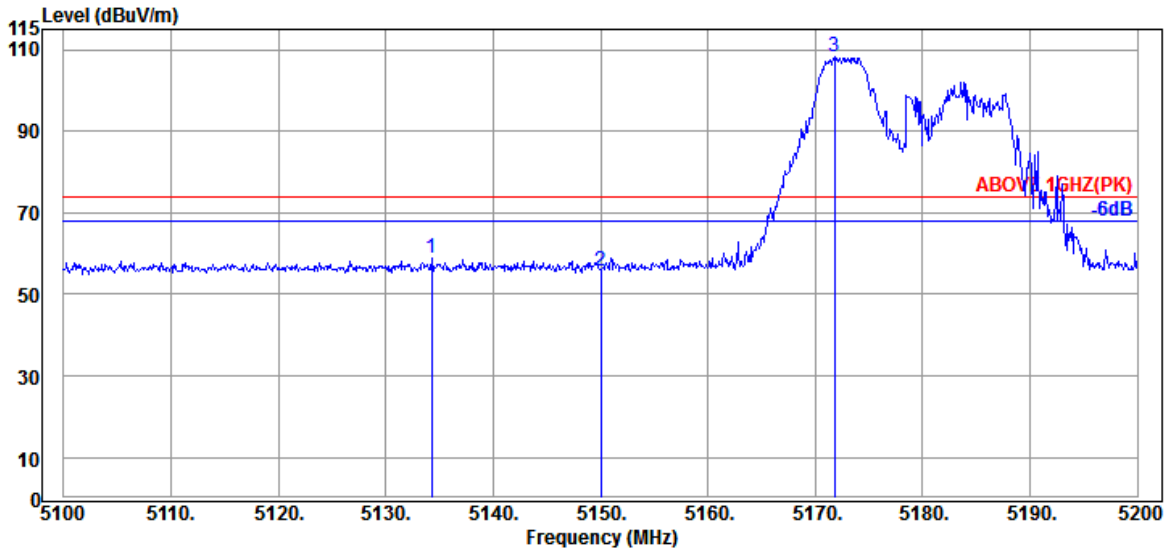

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.300	33.07	8.91	31.63	48.41	58.76	74.00	15.24	Peak
5150.000	33.10	8.92	31.63	45.45	55.84	74.00	18.16	Peak
@ 5171.800	33.17	8.94	31.63	97.76	108.24	---	---	Peak

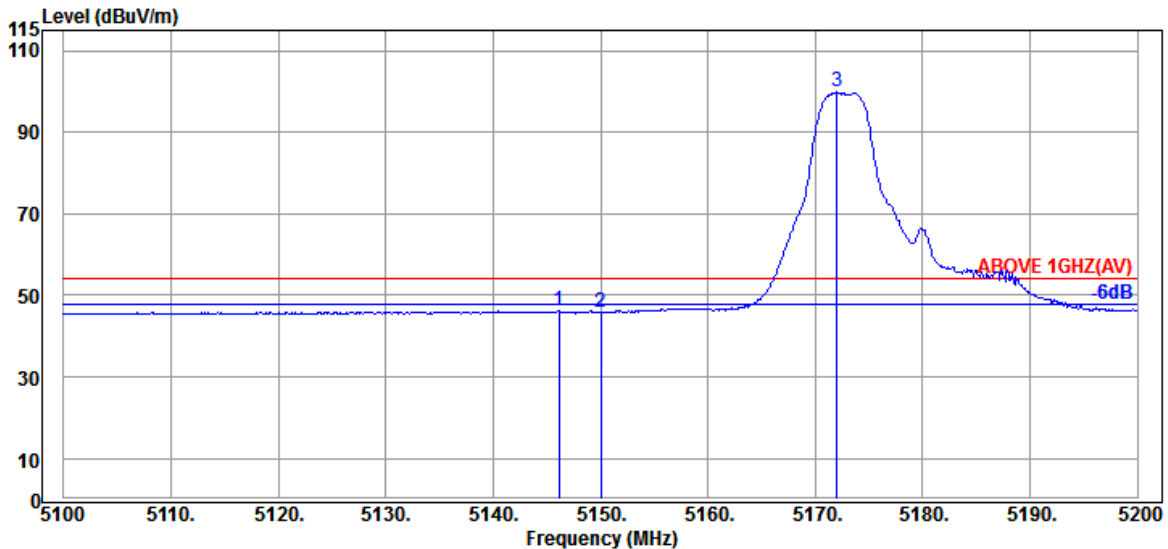


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.10	8.92	31.63	35.82	46.21	54.00	7.79	Average
5150.000	33.10	8.92	31.63	35.54	45.93	54.00	8.07	Average
@ 5172.000	33.17	8.94	31.63	89.33	99.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

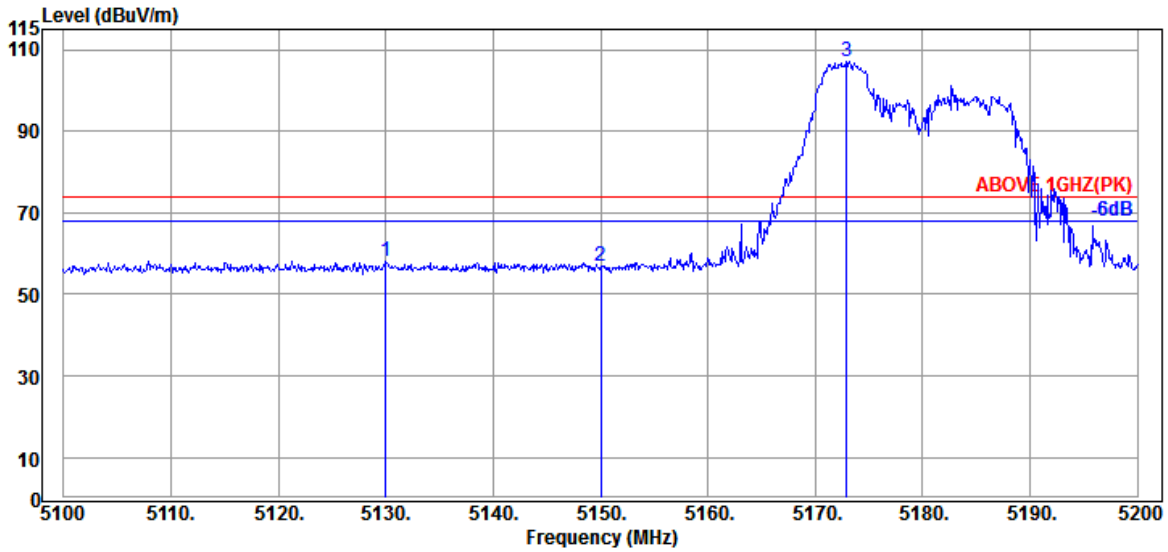

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.000	33.07	8.91	31.63	47.85	58.20	74.00	15.80	Peak
5150.000	33.10	8.92	31.63	46.34	56.73	74.00	17.27	Peak
@ 5172.900	33.17	8.94	31.63	96.73	107.21	---	---	Peak

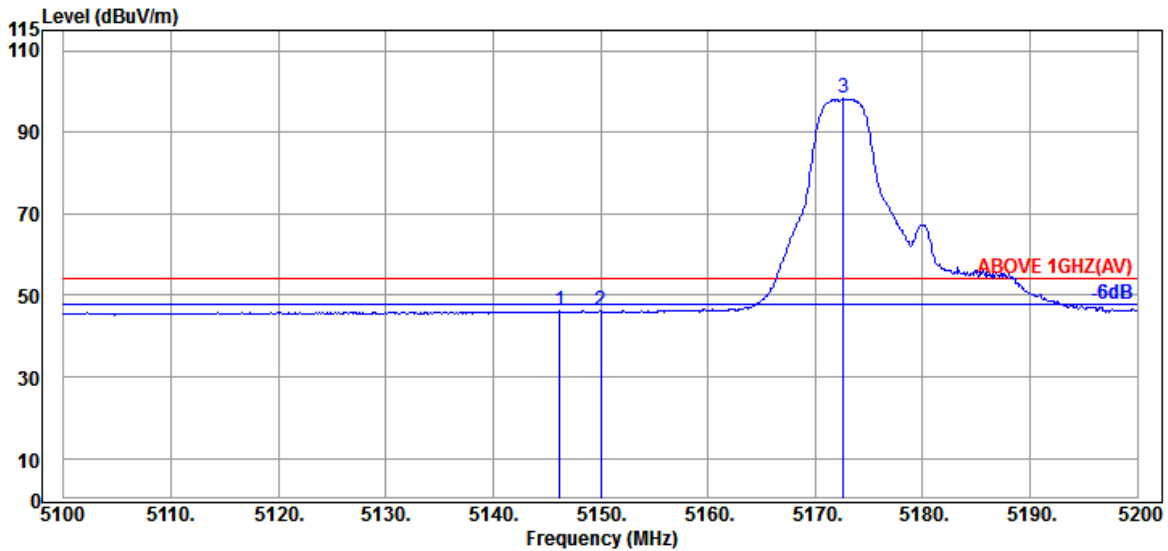


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.10	8.92	31.63	35.67	46.06	54.00	7.94	Average
5150.000	33.10	8.92	31.63	35.79	46.18	54.00	7.82	Average
@ 5172.600	33.17	8.94	31.63	87.76	98.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

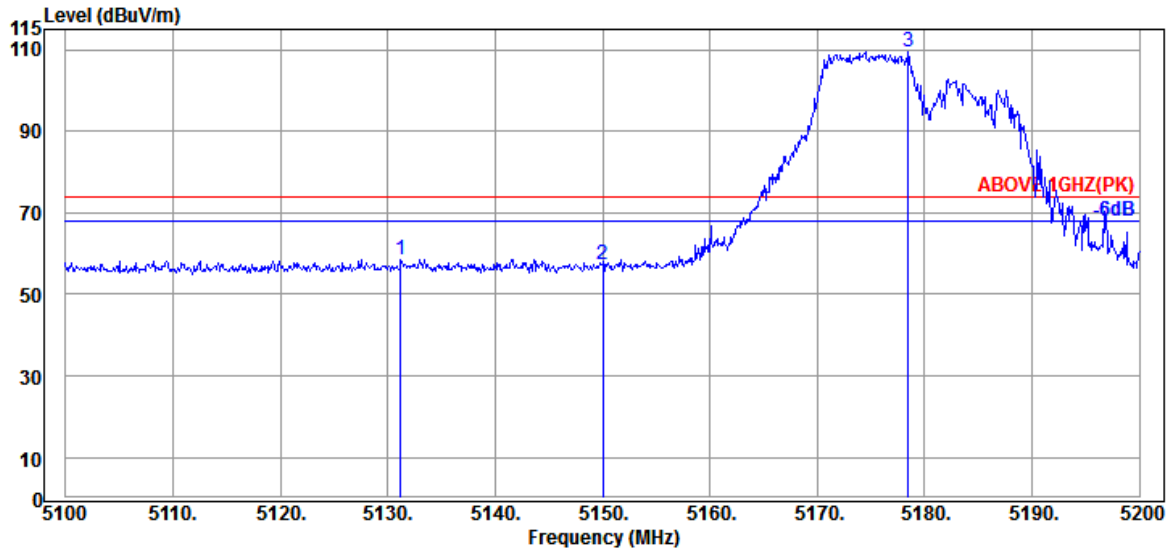

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.200	33.07	8.91	31.63	48.27	58.62	74.00	15.38	Peak
5150.000	33.10	8.92	31.63	47.01	57.40	74.00	16.60	Peak
@ 5178.500	33.17	8.95	31.63	99.13	109.62	---	---	Peak

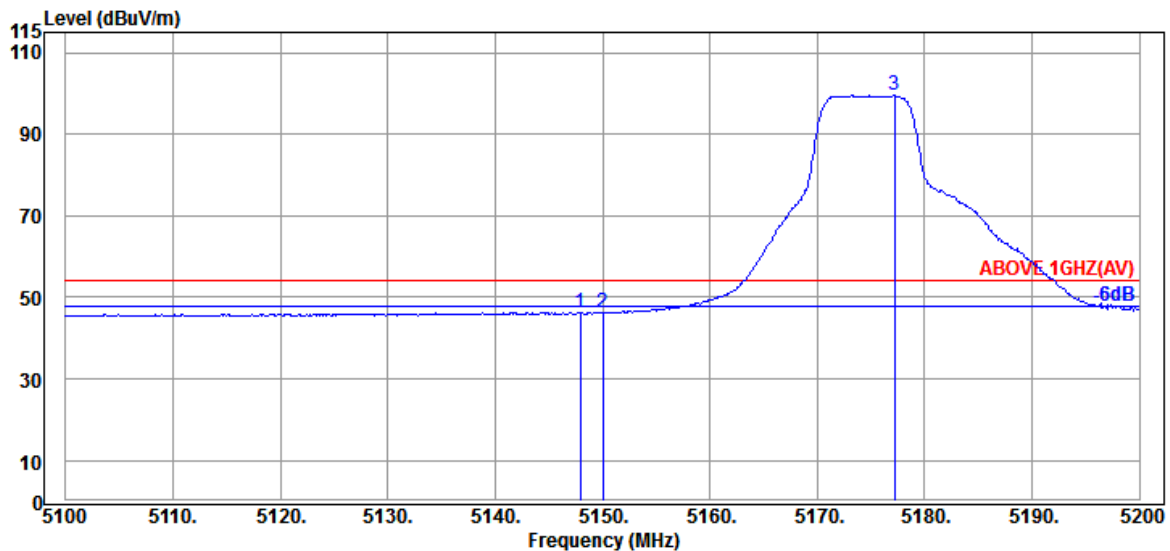


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.10	8.92	31.63	35.86	46.25	54.00	7.75	Average
5150.000	33.10	8.92	31.63	35.85	46.24	54.00	7.76	Average
@ 5177.200	33.17	8.95	31.63	89.01	99.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

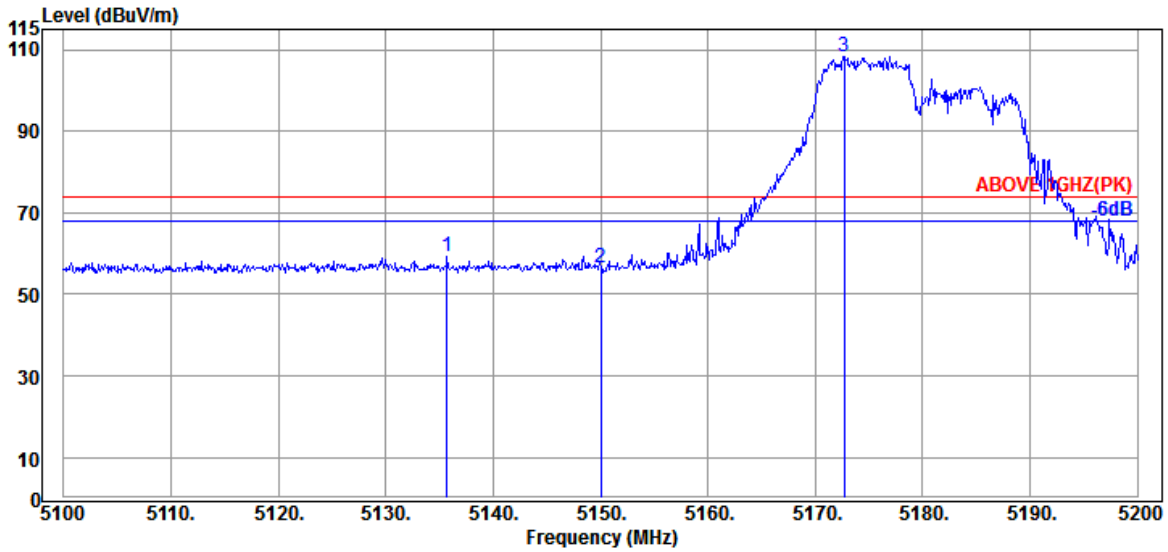

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.700	33.07	8.91	31.63	48.80	59.15	74.00	14.85	Peak
5150.000	33.10	8.92	31.63	45.95	56.34	74.00	17.66	Peak
@ 5172.700	33.17	8.94	31.63	97.77	108.25	---	---	Peak

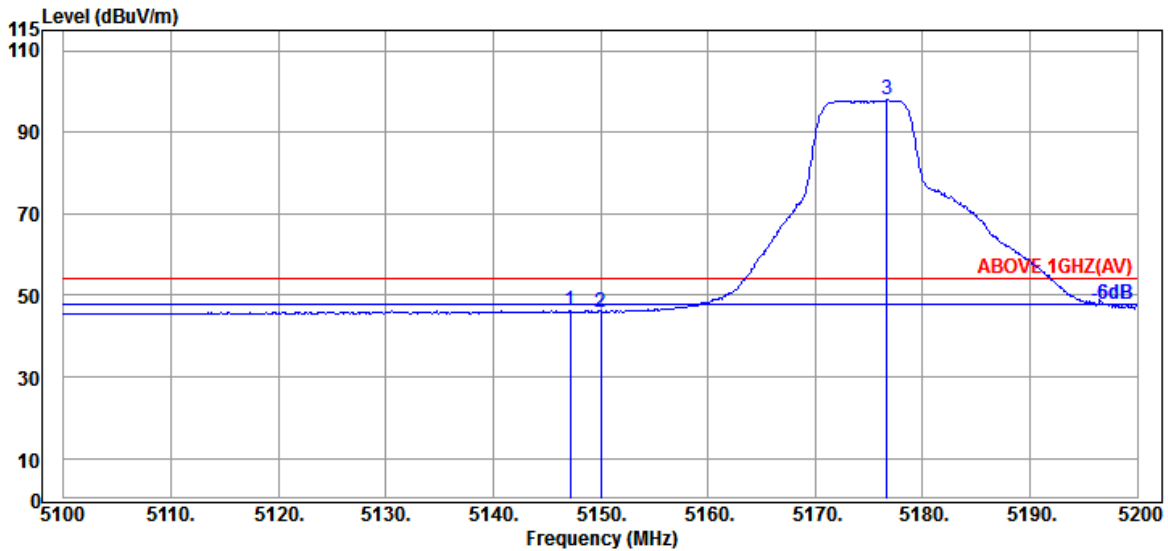


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.10	8.92	31.63	35.85	46.24	54.00	7.76	Average
5150.000	33.10	8.92	31.63	35.51	45.90	54.00	8.10	Average
@ 5176.700	33.17	8.95	31.63	87.49	97.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

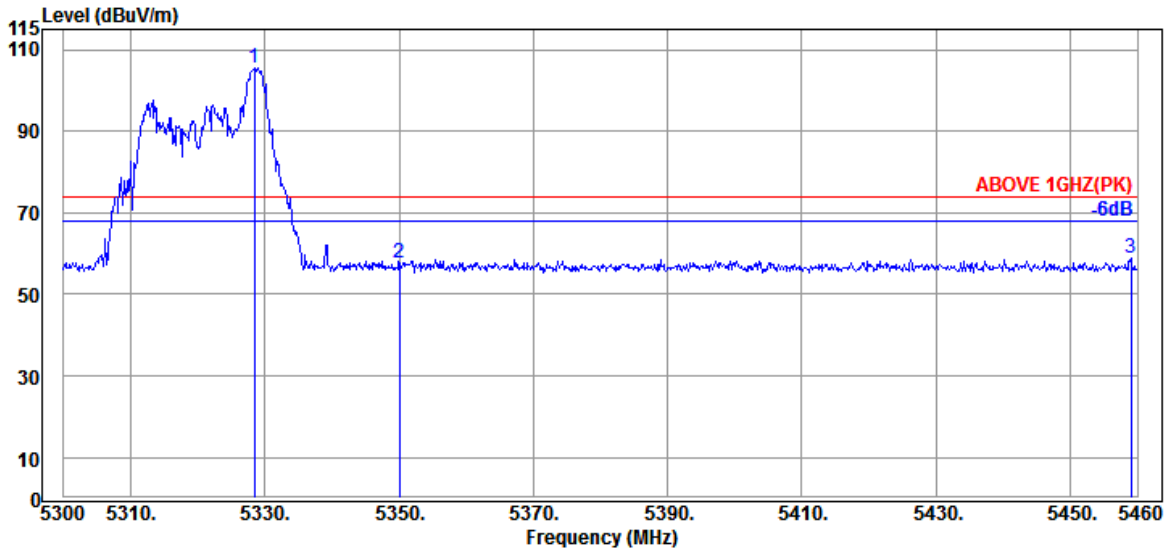

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.40	9.08	31.63	94.60	105.45	---	---	Peak
5350.080	33.50	9.10	31.63	46.78	57.75	74.00	16.25	Peak
5459.040	33.90	9.18	31.63	47.31	58.76	74.00	15.24	Peak

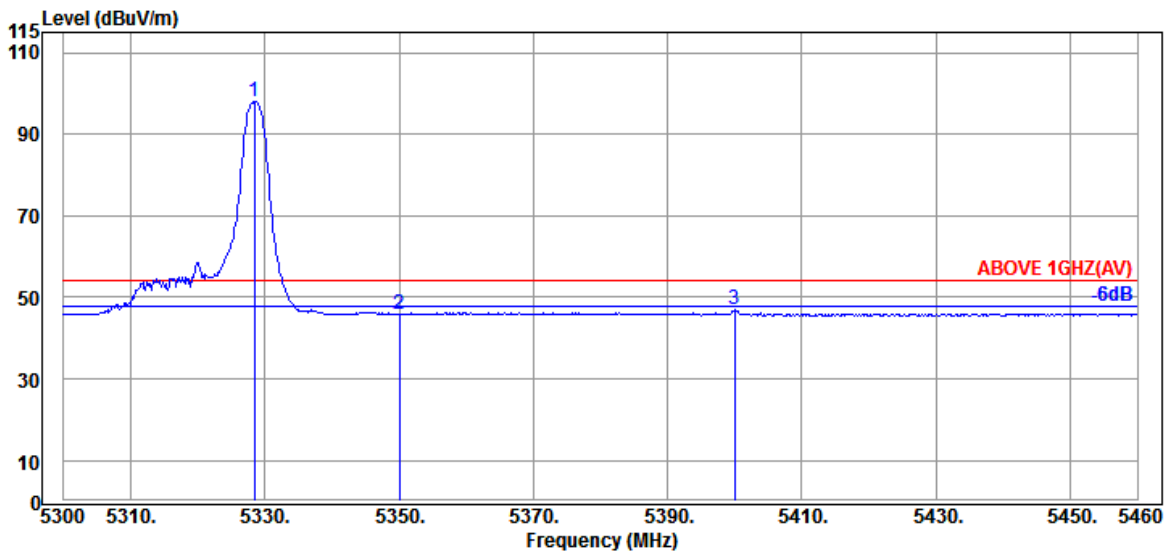


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.40	9.08	31.63	87.22	98.07	---	---	Average
5350.080	33.50	9.10	31.63	34.80	45.77	54.00	8.23	Average
5400.000	33.70	9.14	31.63	35.93	47.14	54.00	6.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

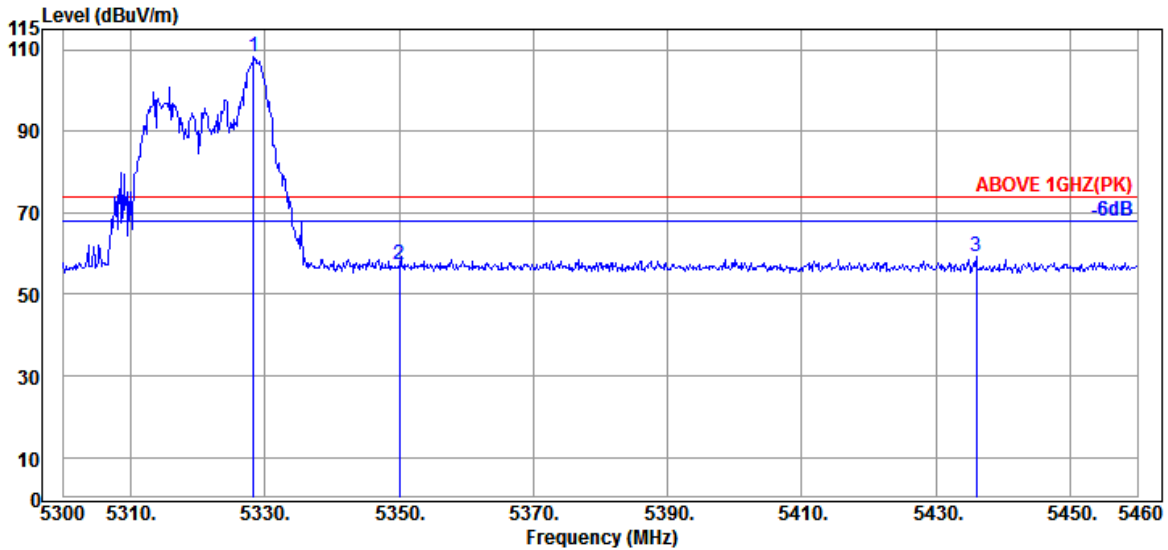

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.40	9.08	31.63	97.57	108.42	---	---	Peak
5350.080	33.50	9.10	31.63	46.40	57.37	74.00	16.63	Peak
5436.000	33.85	9.17	31.63	47.85	59.24	74.00	14.76	Peak

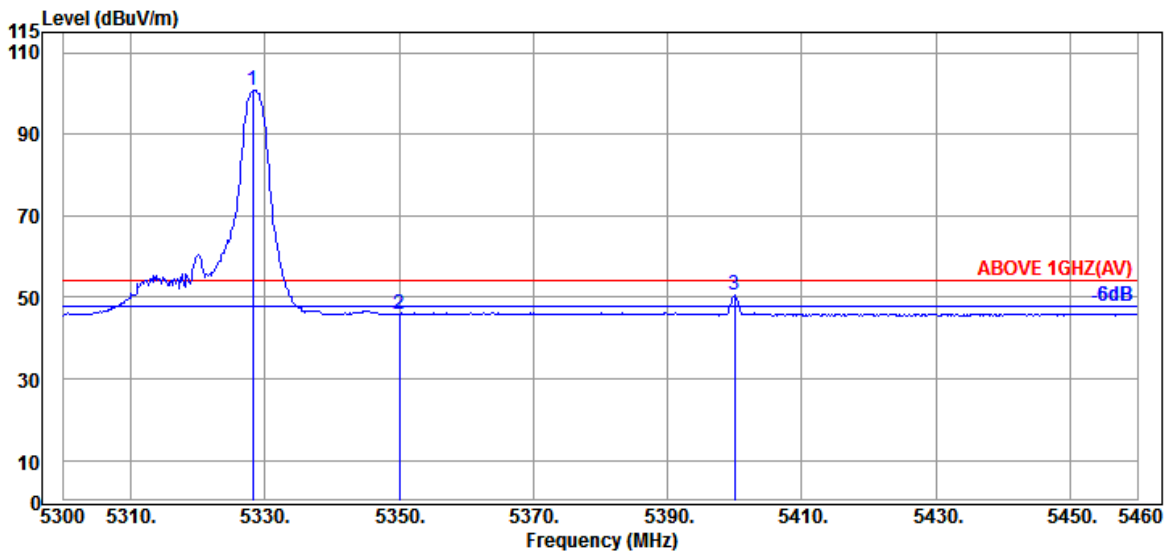


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	33.40	9.08	31.63	89.91	100.76	---	---	Average
5350.080	33.50	9.10	31.63	34.89	45.86	54.00	8.14	Average
5400.000	33.70	9.14	31.63	39.24	50.45	54.00	3.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

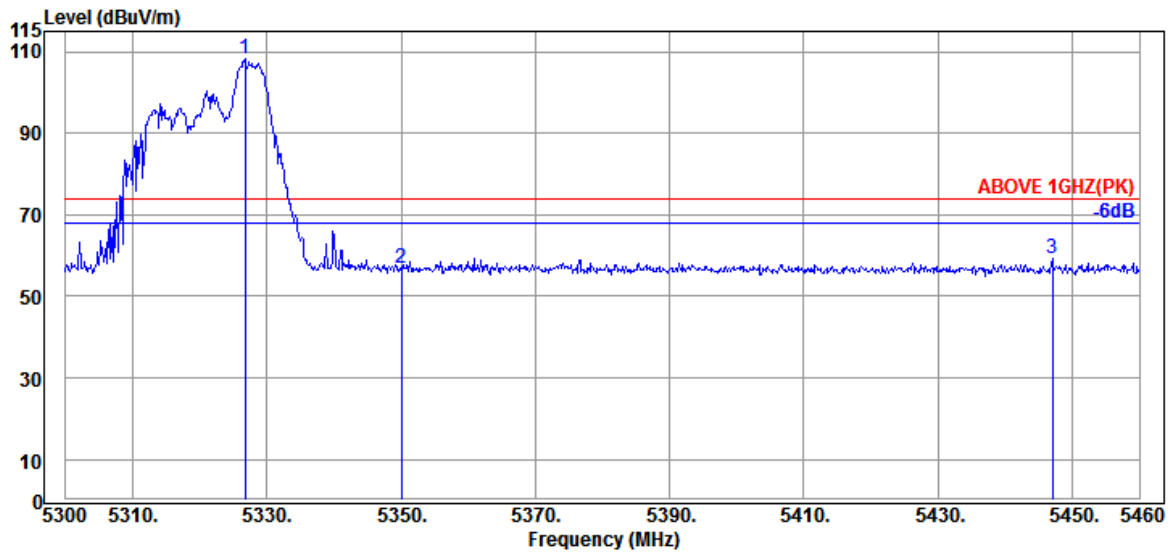

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	33.40	9.08	31.63	97.31	108.16	---	---	Peak
5350.080	33.50	9.10	31.63	45.87	56.84	74.00	17.16	Peak
5447.040	33.85	9.18	31.63	47.76	59.16	74.00	14.84	Peak

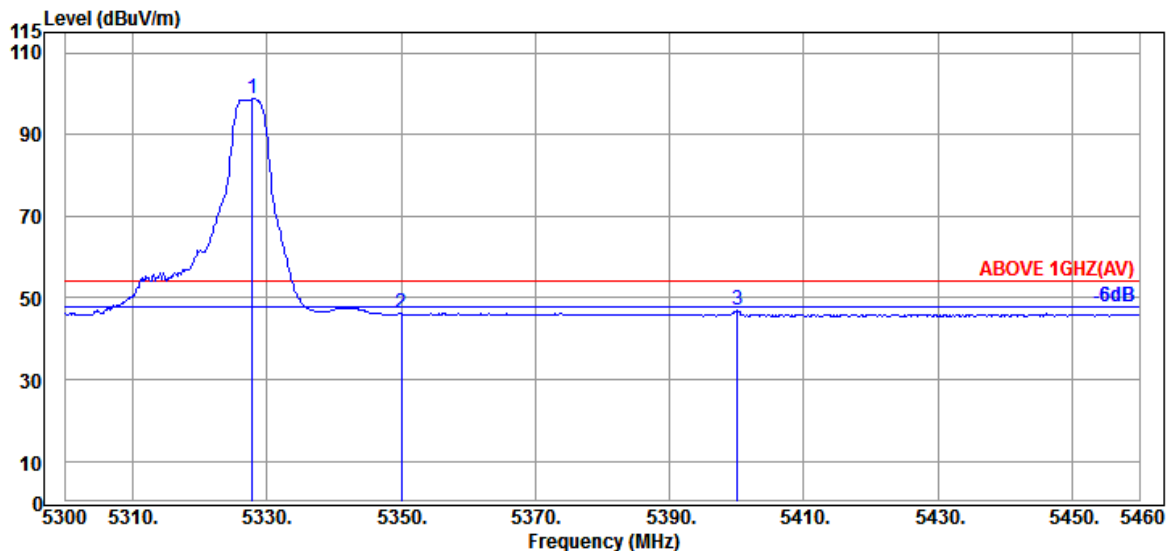


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.40	9.08	31.63	87.82	98.67	---	---	Average
5350.080	33.50	9.10	31.63	35.15	46.12	54.00	7.88	Average
5400.160	33.70	9.14	31.63	35.78	46.99	54.00	7.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

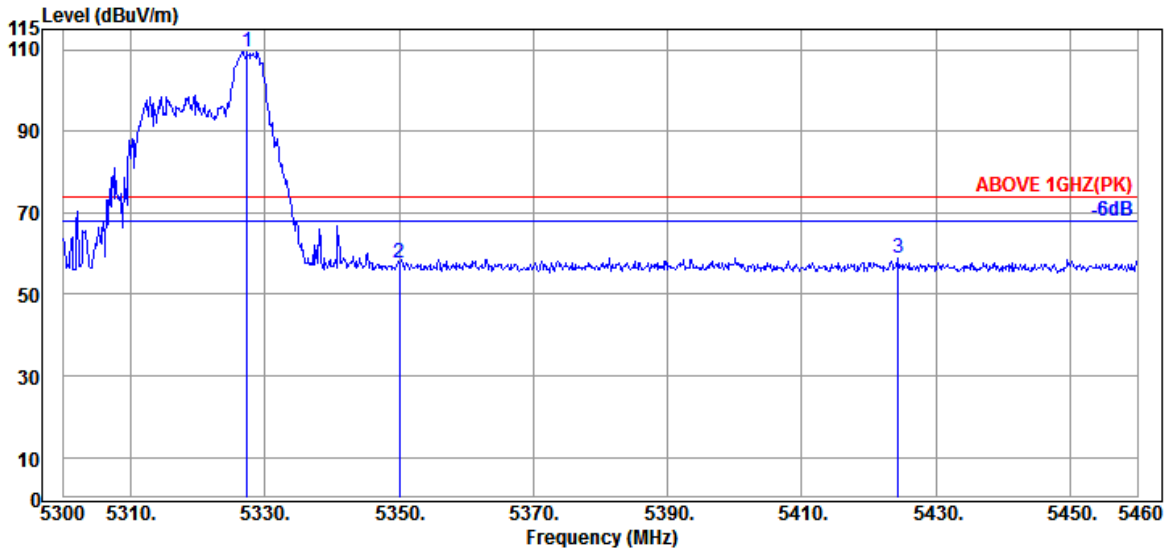

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.360	33.40	9.08	31.63	98.81	109.66	---	---	Peak
5350.080	33.50	9.10	31.63	46.85	57.82	74.00	16.18	Peak
5424.320	33.80	9.15	31.63	47.52	58.84	74.00	15.16	Peak

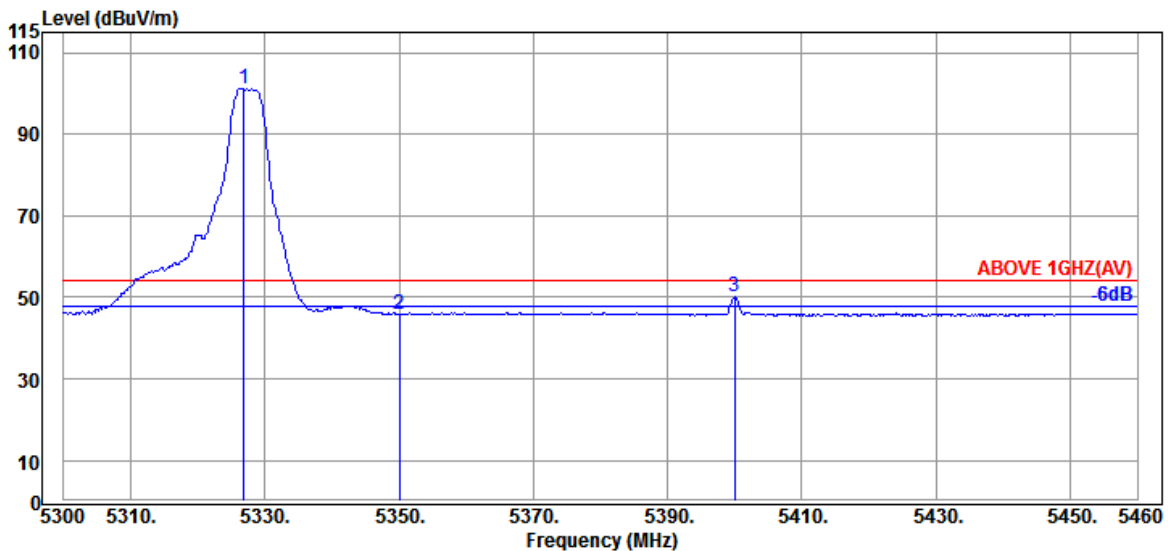


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	33.40	9.08	31.63	90.37	101.22	---	---	Average
5350.080	33.50	9.10	31.63	34.87	45.84	54.00	8.16	Average
5400.000	33.70	9.14	31.63	38.93	50.14	54.00	3.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

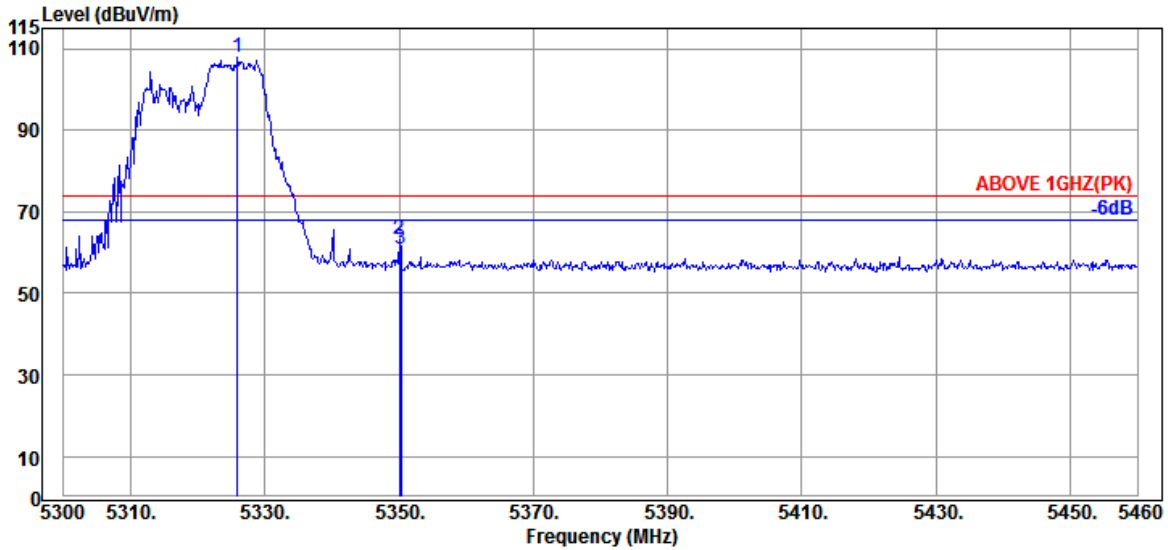

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.920	33.40	9.07	31.63	97.04	107.88	---	---	Peak
5350.080	33.50	9.10	31.63	52.34	63.31	74.00	10.69	Peak
5350.240	33.50	9.10	31.63	49.94	60.91	74.00	13.09	Peak

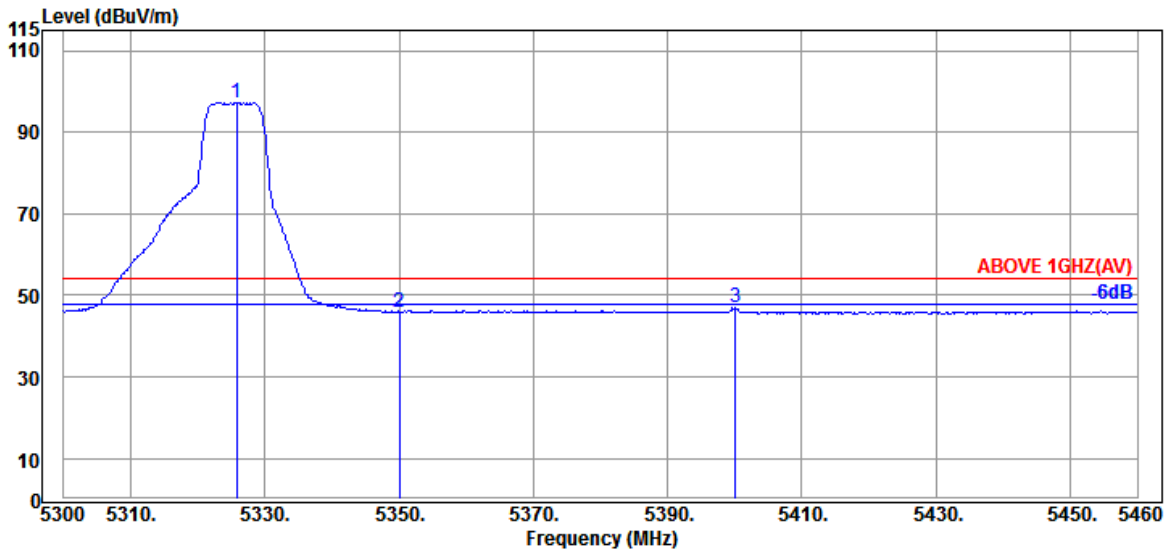


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.760	33.40	9.07	31.63	86.46	97.30	---	---	Average
5350.080	33.50	9.10	31.63	34.93	45.90	54.00	8.10	Average
5400.160	33.70	9.14	31.63	35.90	47.11	54.00	6.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

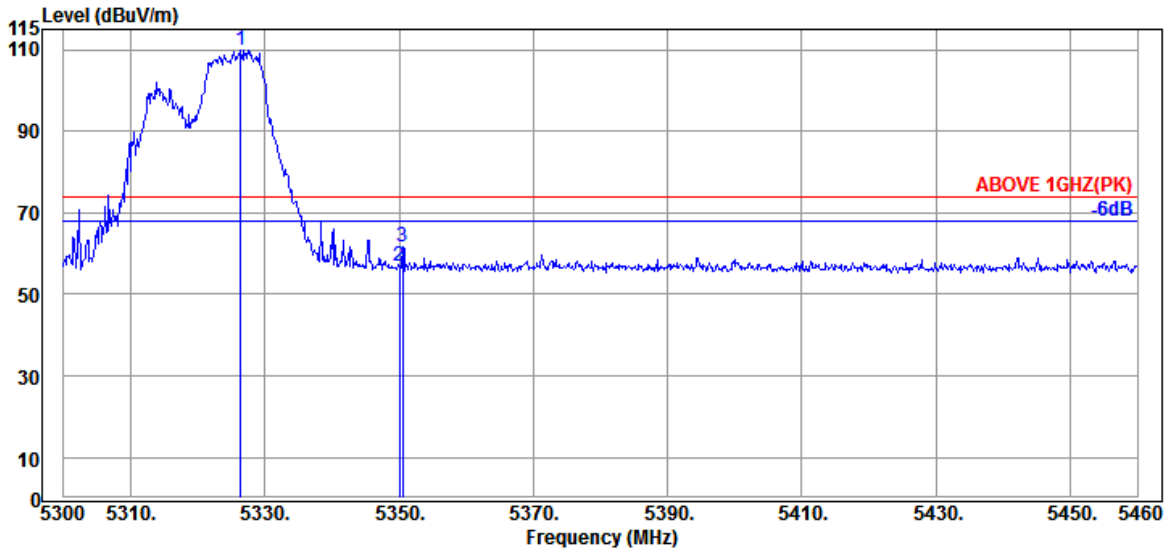

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.400	33.40	9.07	31.63	99.22	110.06	---	---	Peak
5350.080	33.50	9.10	31.63	45.77	56.74	74.00	17.26	Peak
5350.560	33.50	9.10	31.63	50.68	61.65	74.00	12.35	Peak

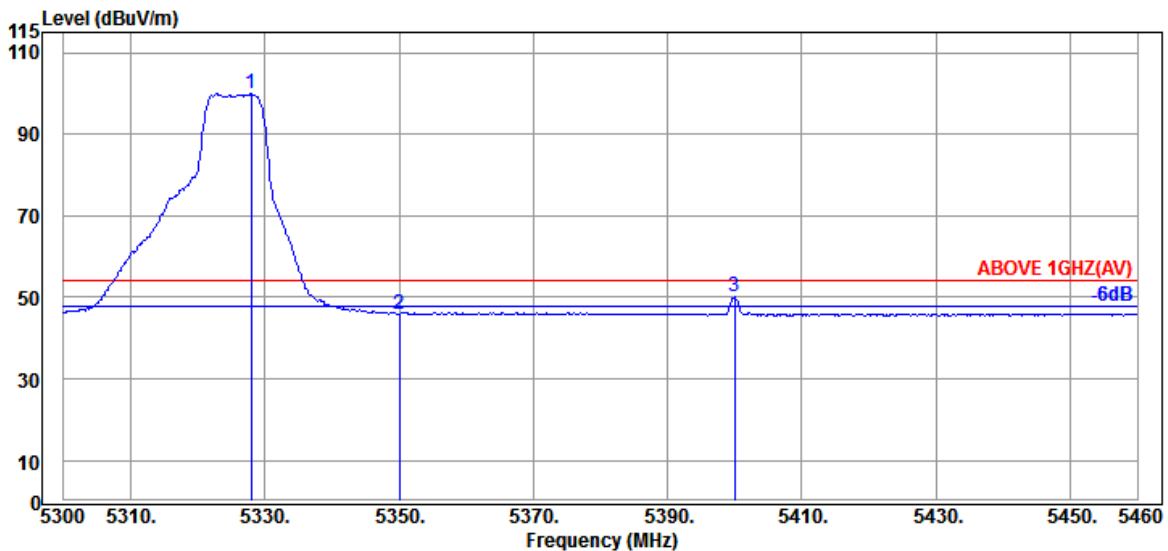


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.40	9.08	31.63	89.05	99.90	---	---	Average
5350.080	33.50	9.10	31.63	35.04	46.01	54.00	7.99	Average
5400.000	33.70	9.14	31.63	38.86	50.07	54.00	3.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

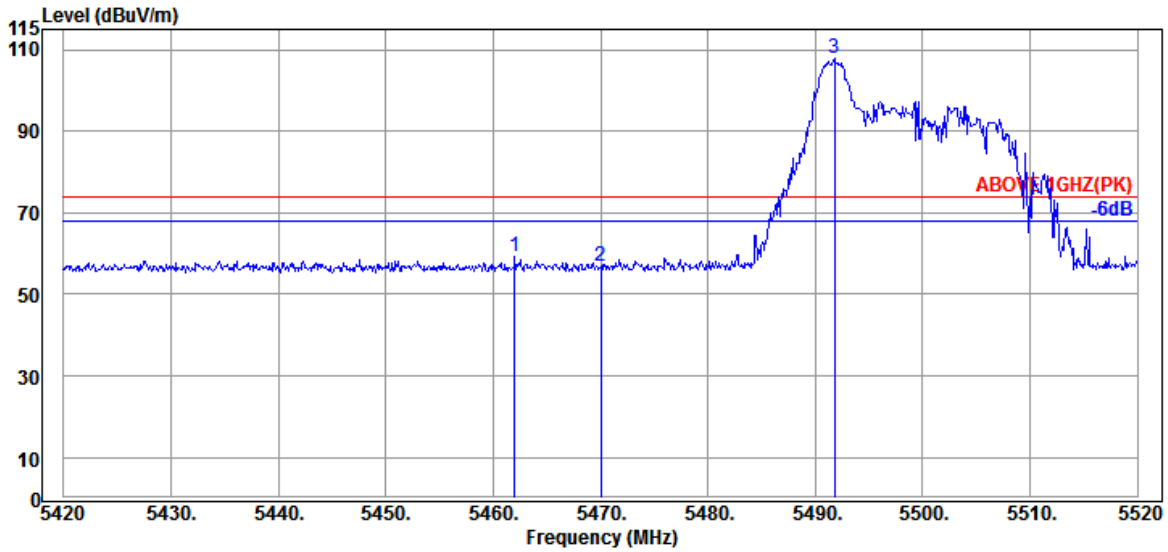

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	33.90	9.18	31.63	47.79	59.24	74.00	14.76	Peak
5470.000	33.97	9.20	31.63	45.54	57.08	74.00	16.92	Peak
@ 5491.800	34.03	9.21	31.63	96.36	107.97	---	---	Peak

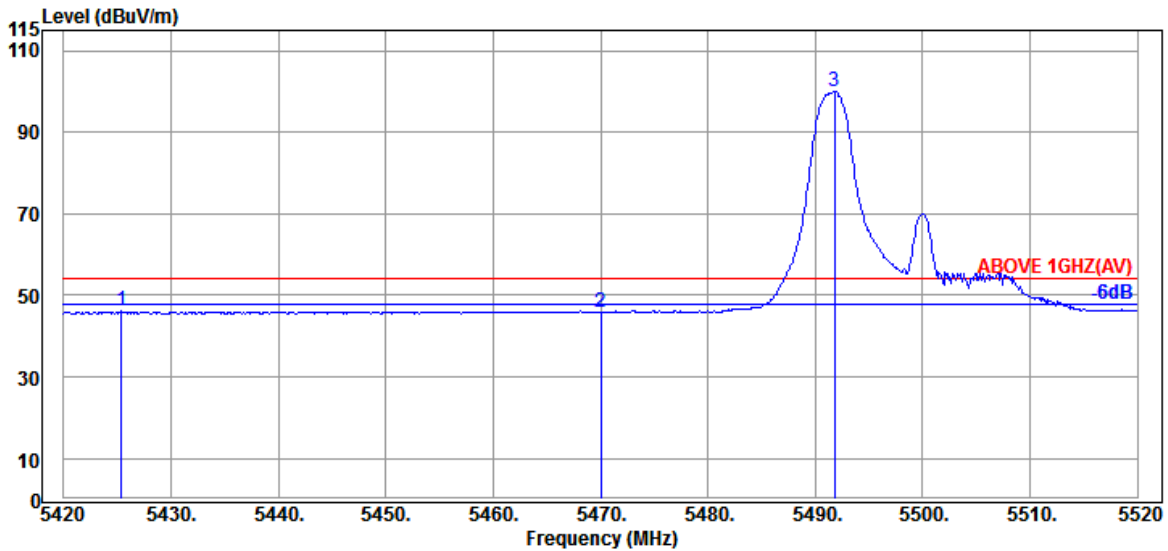


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.400	33.80	9.15	31.63	34.76	46.08	54.00	7.92	Average
5470.000	33.97	9.20	31.63	34.38	45.92	54.00	8.08	Average
@ 5491.800	34.03	9.21	31.63	88.25	99.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

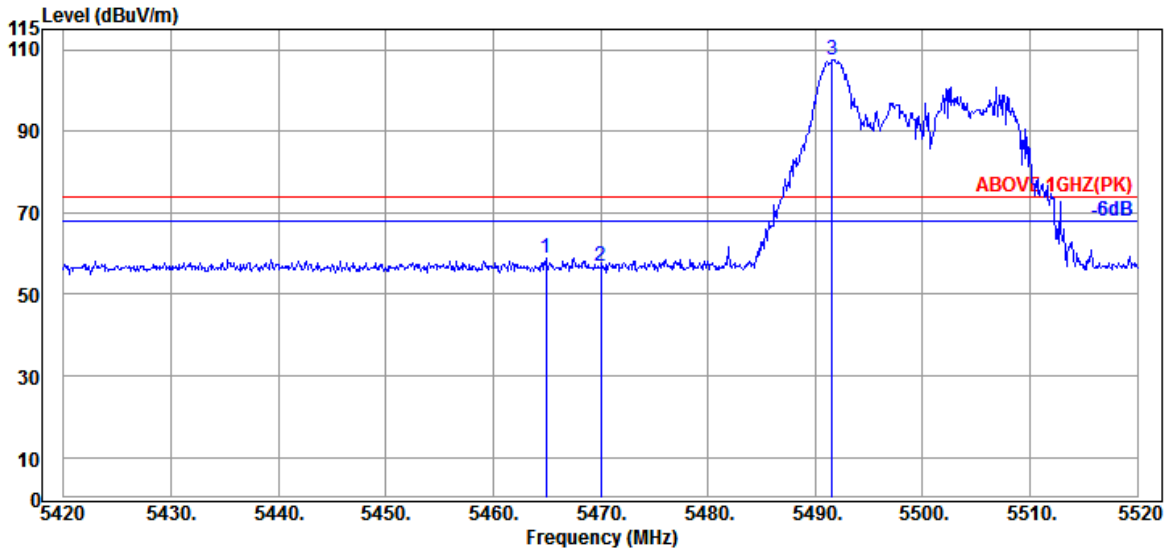

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	33.97	9.20	31.63	47.17	58.71	74.00	15.29	Peak
5470.000	33.97	9.20	31.63	45.40	56.94	74.00	17.06	Peak
@ 5491.600	34.03	9.21	31.63	95.94	107.55	---	---	Peak

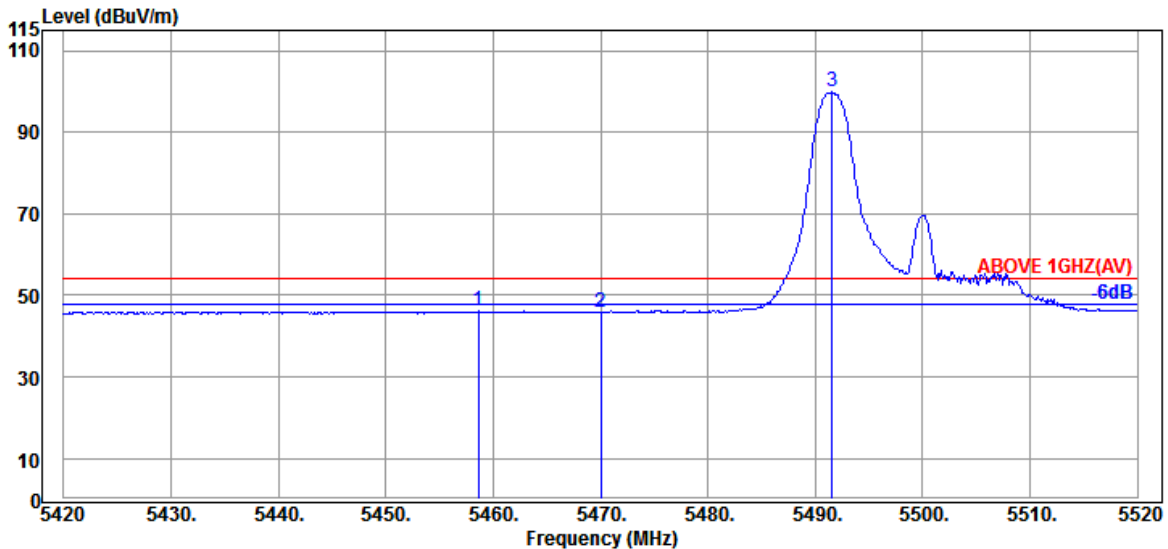


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.600	33.90	9.18	31.63	34.63	46.08	54.00	7.92	Average
5470.000	33.97	9.20	31.63	34.22	45.76	54.00	8.24	Average
@ 5491.600	34.03	9.21	31.63	88.18	99.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

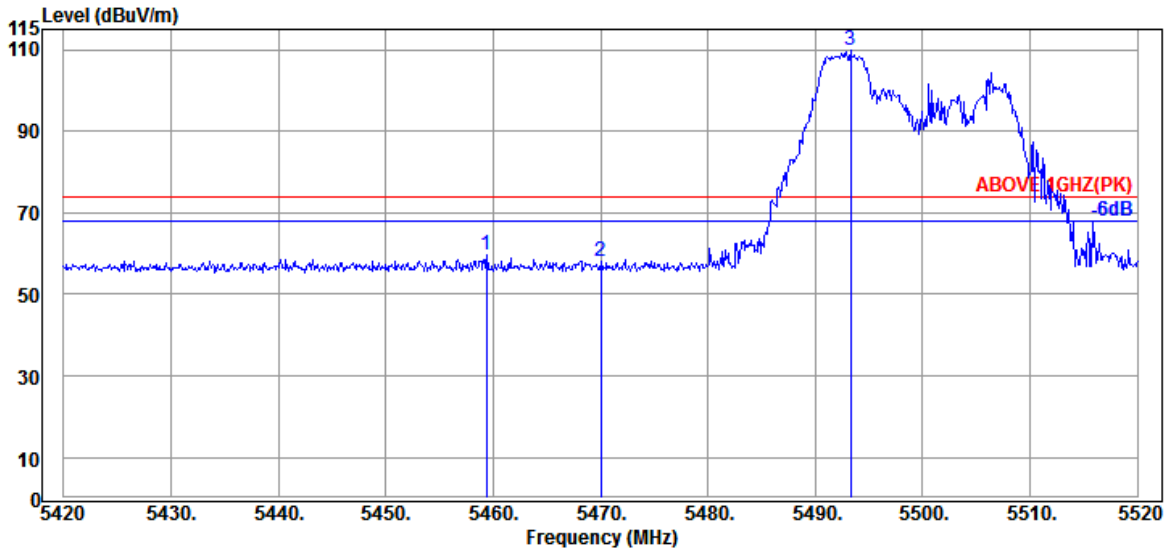

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	33.90	9.18	31.63	48.04	59.49	74.00	14.51	Peak
5470.000	33.97	9.20	31.63	46.55	58.09	74.00	15.91	Peak
@ 5493.300	34.03	9.21	31.63	98.23	109.84	---	---	Peak

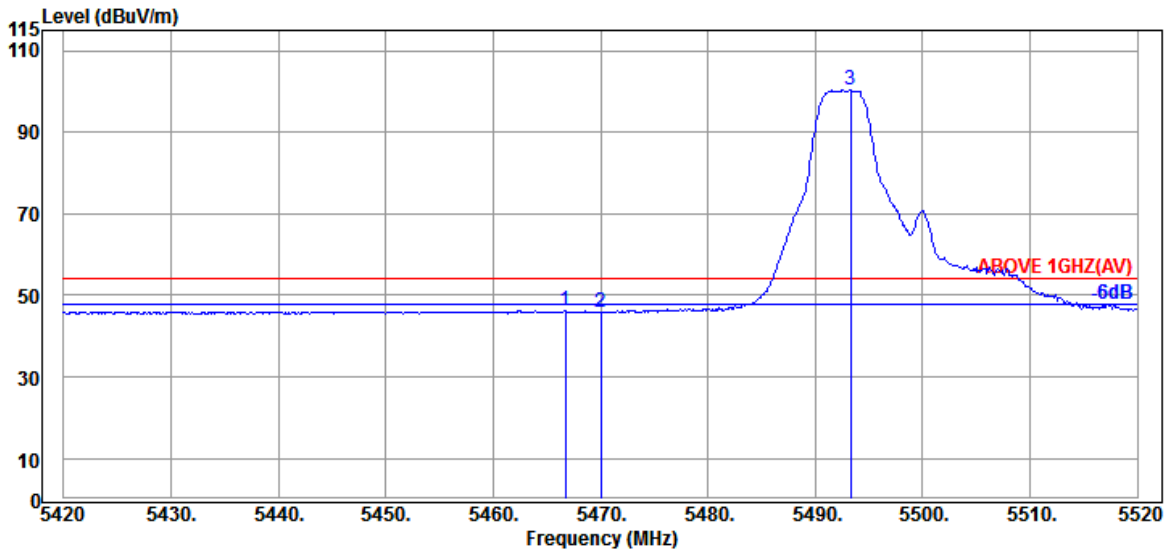


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	33.97	9.20	31.63	34.73	46.27	54.00	7.73	Average
5470.000	33.97	9.20	31.63	34.34	45.88	54.00	8.12	Average
@ 5493.300	34.03	9.21	31.63	88.67	100.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

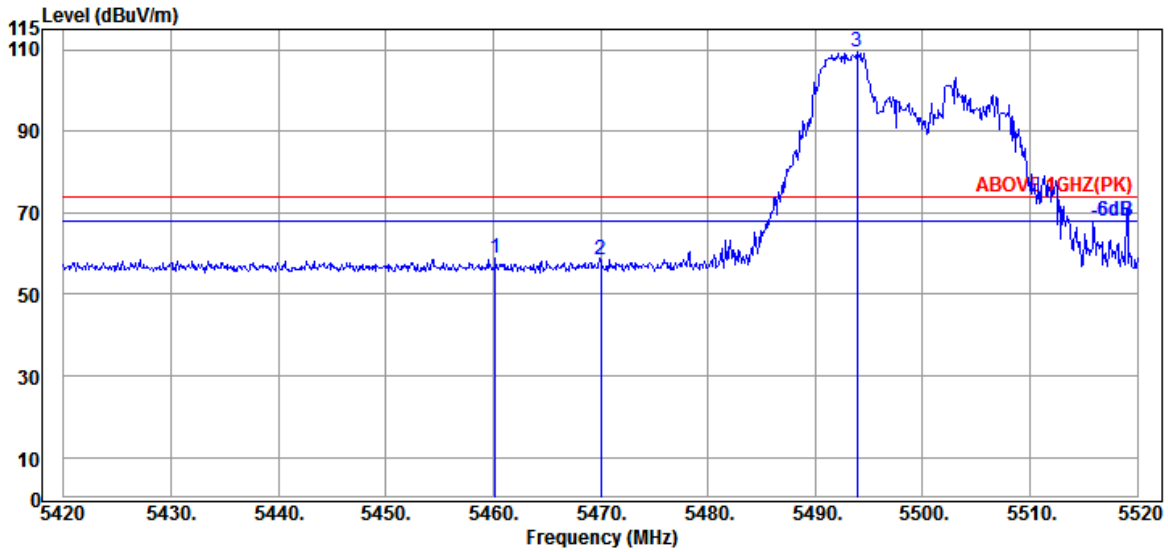

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	33.90	9.18	31.63	47.54	58.99	74.00	15.01	Peak
5470.000	33.97	9.20	31.63	46.87	58.41	74.00	15.59	Peak
@ 5493.900	34.03	9.21	31.63	97.70	109.31	---	---	Peak

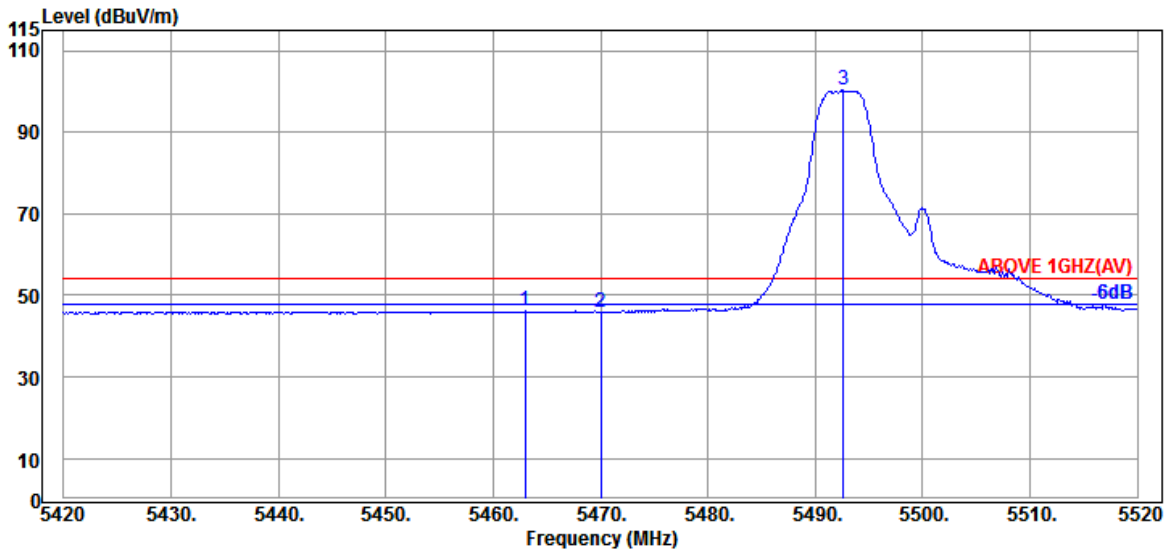


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	33.90	9.20	31.63	34.61	46.08	54.00	7.92	Average
5470.000	33.97	9.20	31.63	34.31	45.85	54.00	8.15	Average
@ 5492.600	34.03	9.21	31.63	88.67	100.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

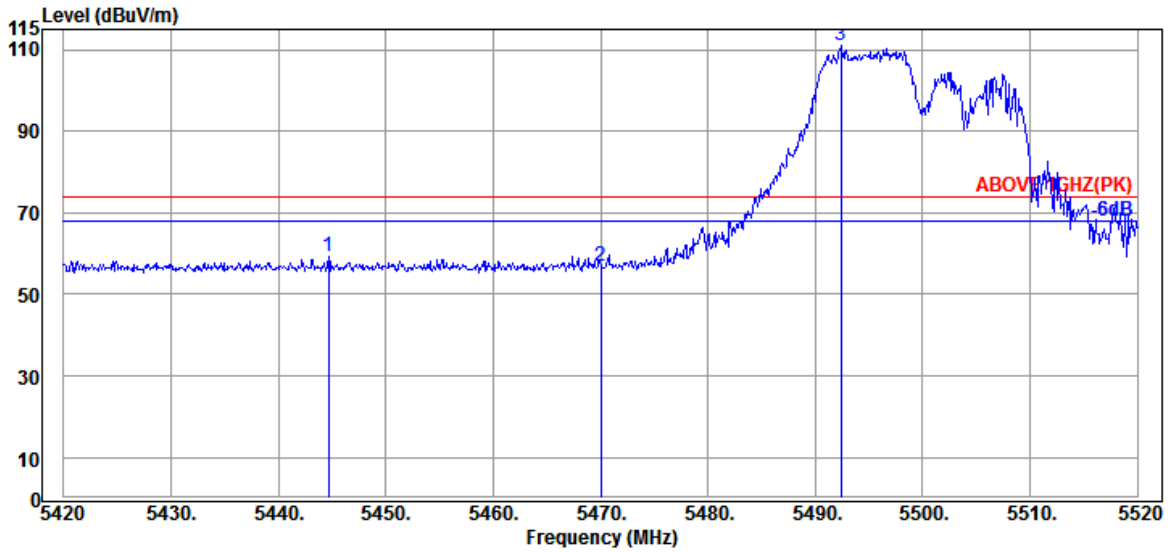

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.700	33.85	9.17	31.63	47.75	59.14	74.00	14.86	Peak
5470.000	33.97	9.20	31.63	45.23	56.77	74.00	17.23	Peak
@ 5492.400	34.03	9.21	31.63	99.37	110.98	---	---	Peak

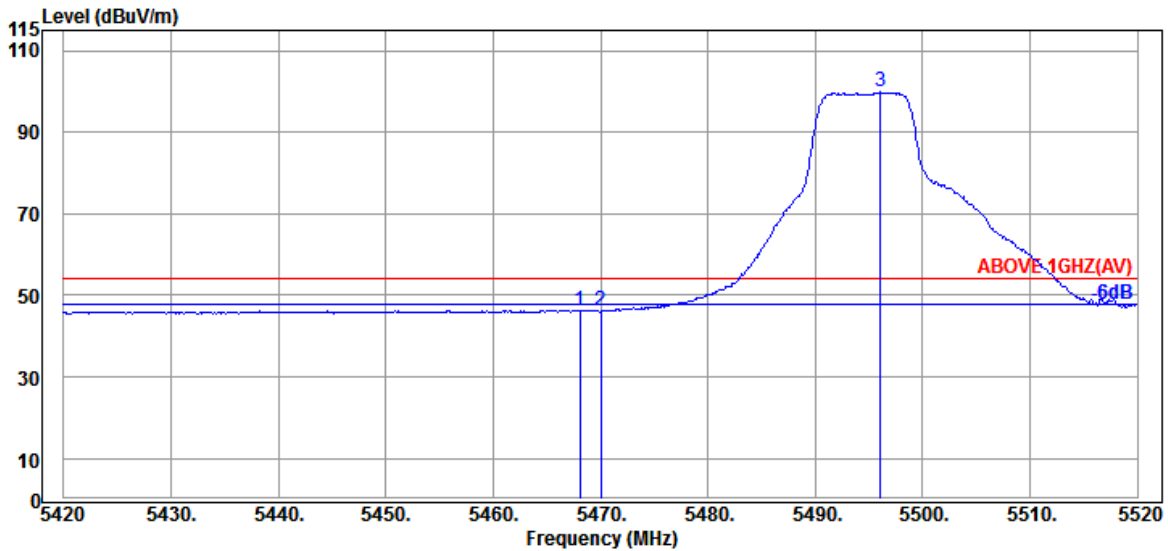


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	33.97	9.20	31.63	34.77	46.31	54.00	7.69	Average
5470.000	33.97	9.20	31.63	34.67	46.21	54.00	7.79	Average
@ 5496.100	34.10	9.21	31.63	88.16	99.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

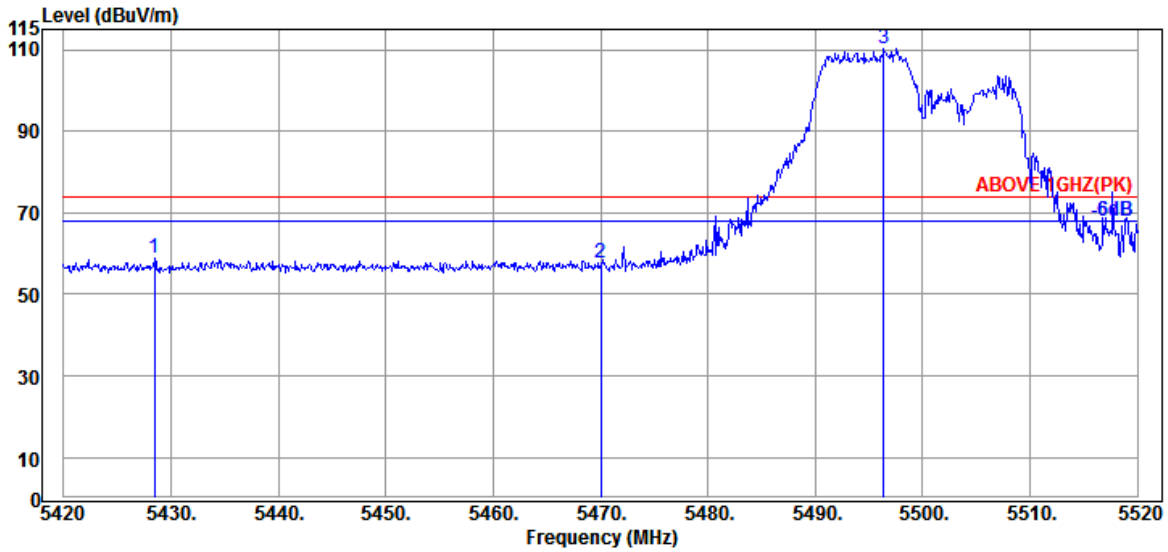

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.500	33.80	9.15	31.63	47.39	58.71	74.00	15.29	Peak
5470.000	33.97	9.20	31.63	45.98	57.52	74.00	16.48	Peak
@ 5496.400	34.10	9.21	31.63	98.75	110.43	---	---	Peak

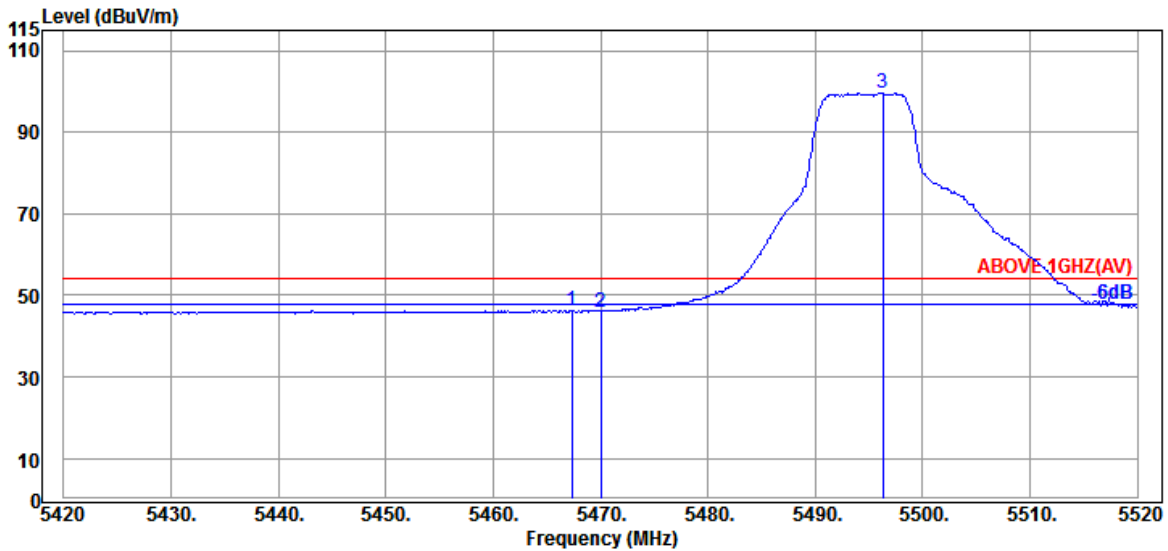


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	33.97	9.20	31.63	34.79	46.33	54.00	7.67	Average
5470.000	33.97	9.20	31.63	34.45	45.99	54.00	8.01	Average
@ 5496.300	34.10	9.21	31.63	87.80	99.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

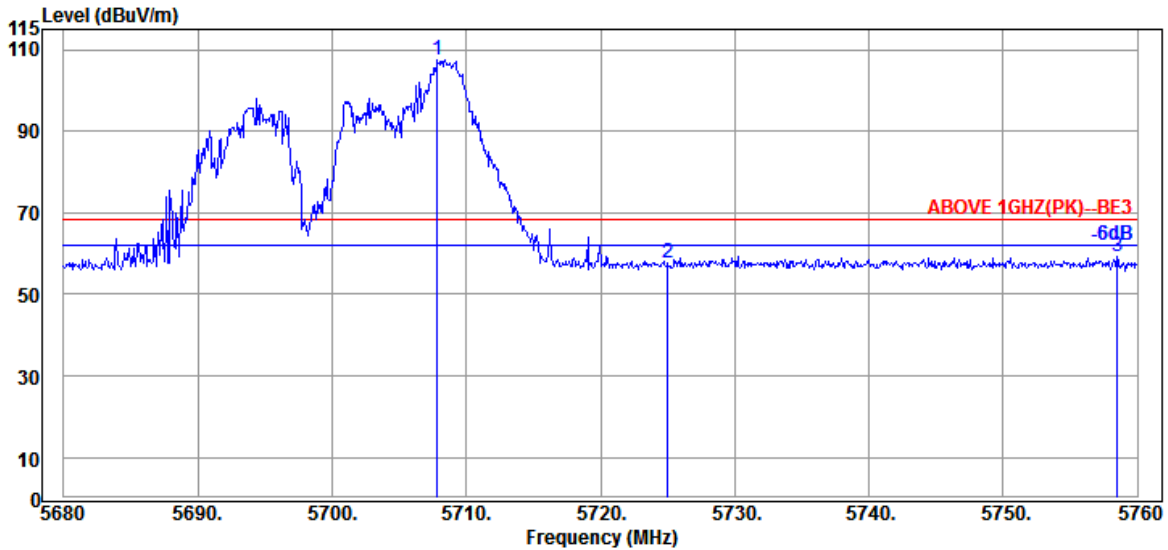

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.840	34.40	9.40	31.74	95.39	107.45	---	---	Peak
5725.040	34.50	9.42	31.74	45.65	57.83	68.20	10.37	Peak
5758.480	34.63	9.45	31.75	46.93	59.26	68.20	8.94	Peak

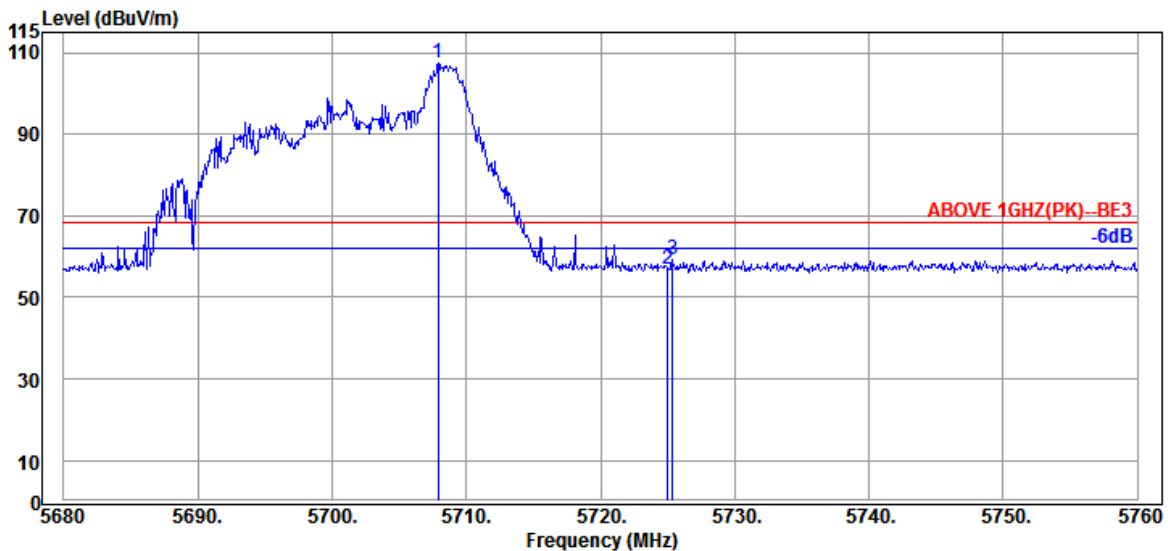


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.40	9.40	31.74	95.48	107.54	---	---	Peak
5725.040	34.50	9.42	31.74	44.64	56.82	68.20	11.38	Peak
5725.360	34.50	9.42	31.74	47.18	59.36	68.20	8.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

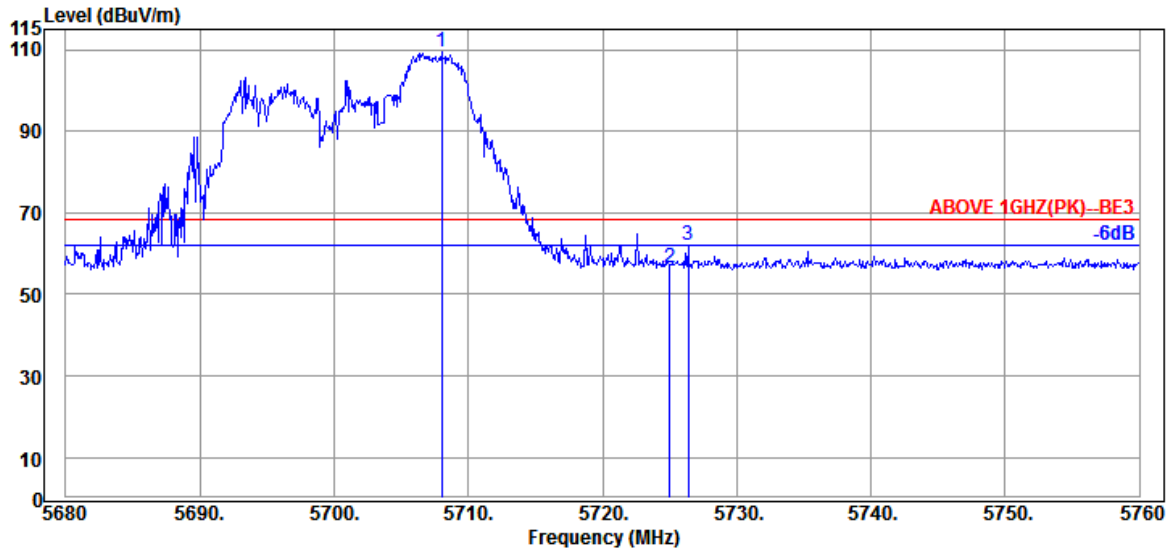

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	34.40	9.40	31.74	97.34	109.40	---	---	Peak
5725.040	34.50	9.42	31.74	44.20	56.38	68.20	11.82	Peak
5726.400	34.50	9.42	31.75	49.97	62.14	68.20	6.06	Peak

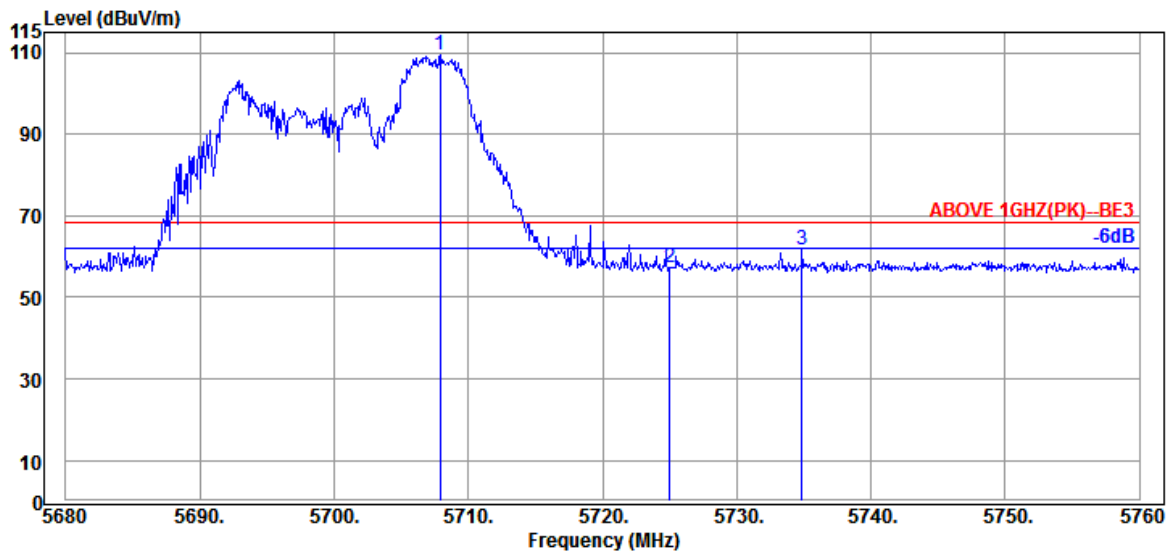


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.40	9.40	31.74	97.48	109.54	---	---	Peak
5725.040	34.50	9.42	31.74	45.10	57.28	68.20	10.92	Peak
5734.880	34.50	9.43	31.75	49.51	61.69	68.20	6.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

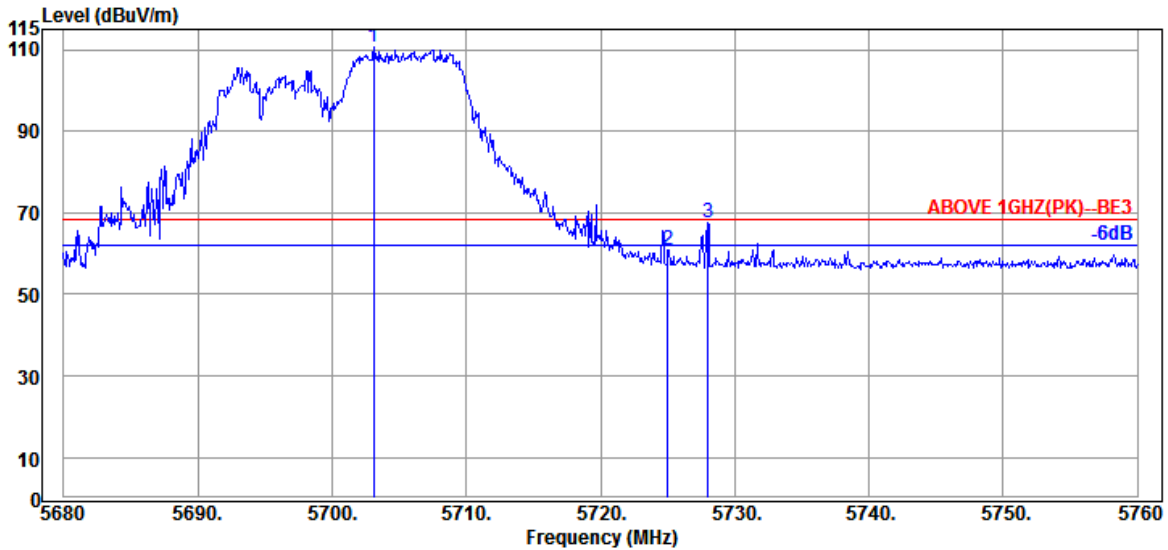

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.120	34.30	9.40	31.73	98.75	110.72	---	---	Peak
5725.040	34.50	9.42	31.74	48.85	61.03	68.20	7.17	Peak
5728.000	34.50	9.42	31.75	55.30	67.47	68.20	0.73	Peak

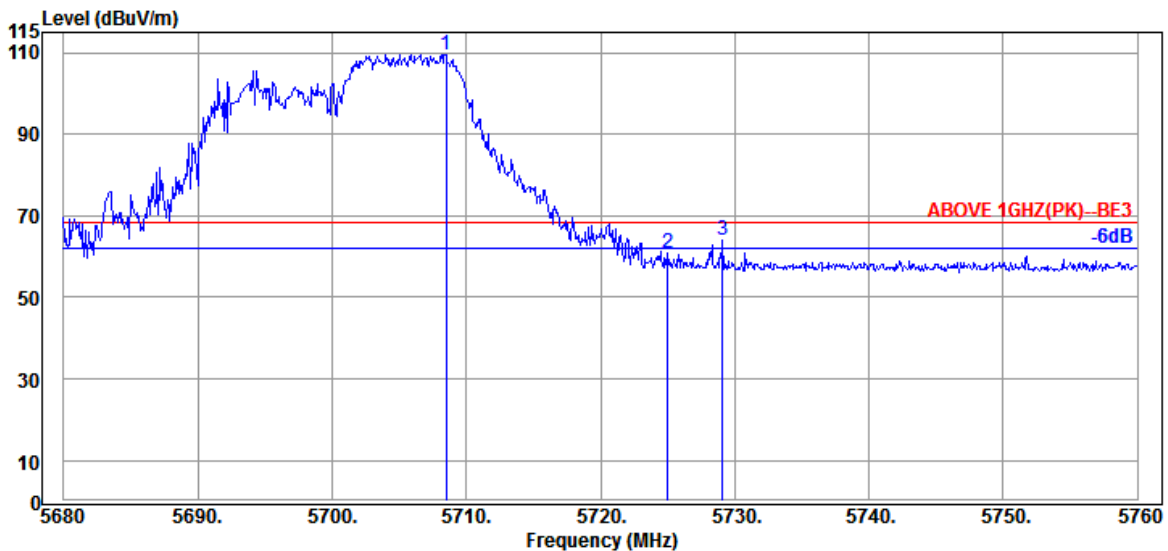


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.480	34.40	9.40	31.74	97.51	109.57	---	---	Peak
5725.040	34.50	9.42	31.74	48.60	60.78	68.20	7.42	Peak
5729.120	34.50	9.42	31.75	51.78	63.95	68.20	4.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

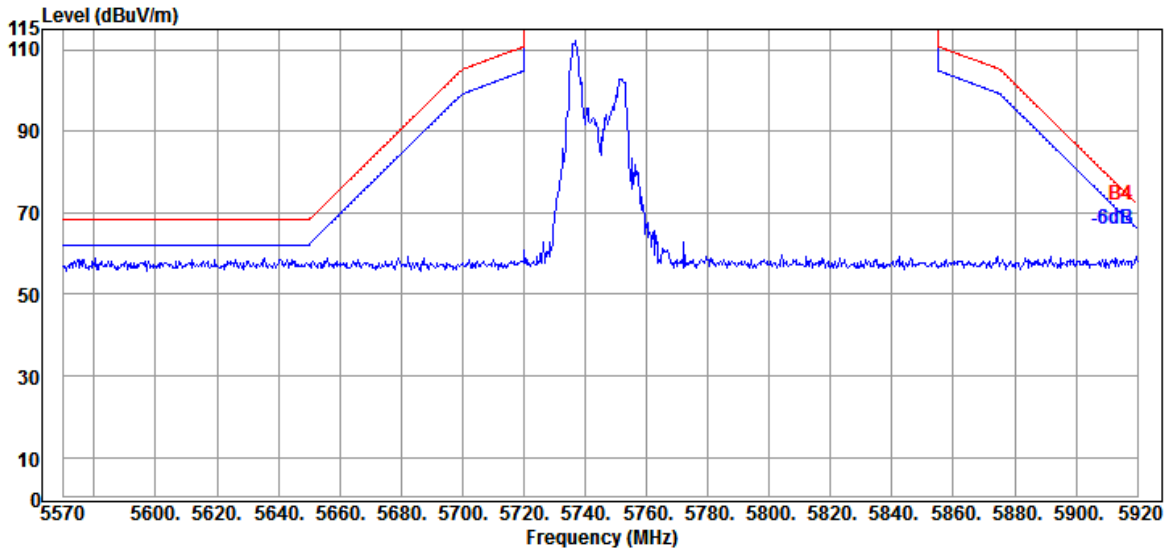


Antenna at Vertical Polarization

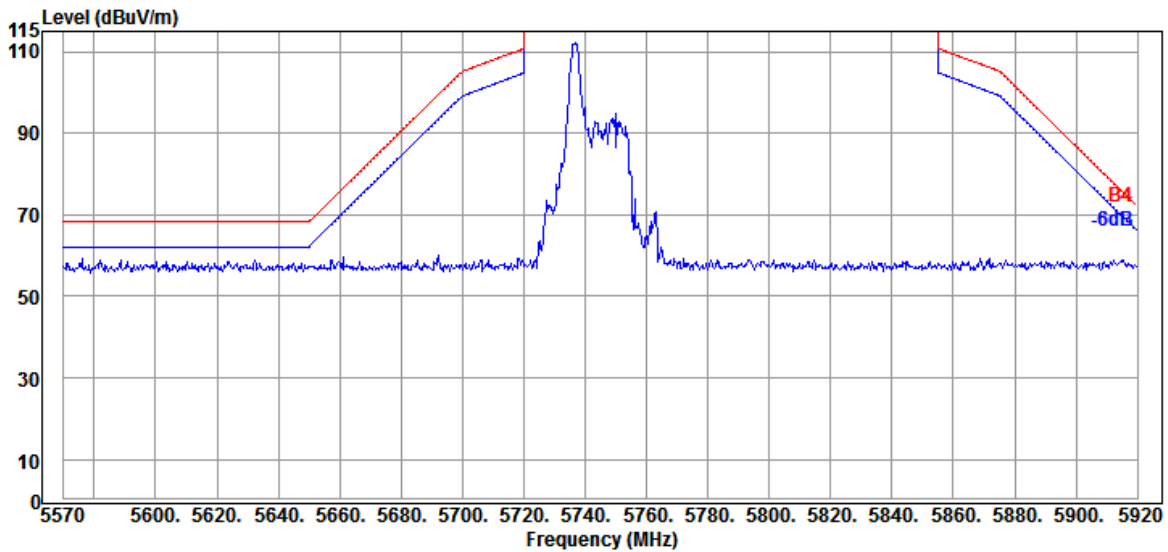


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

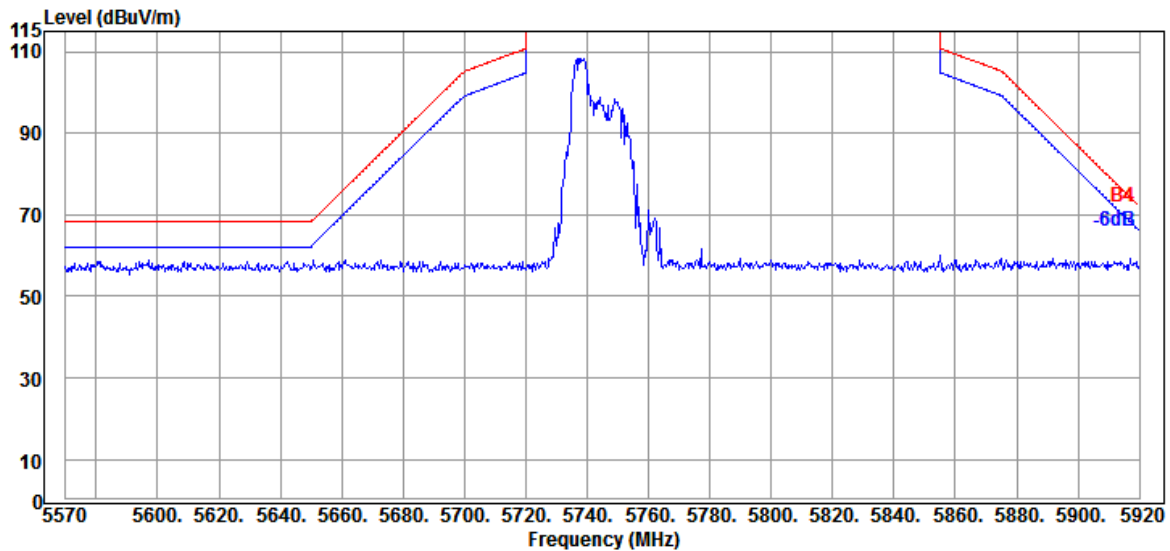


Antenna at Vertical Polarization

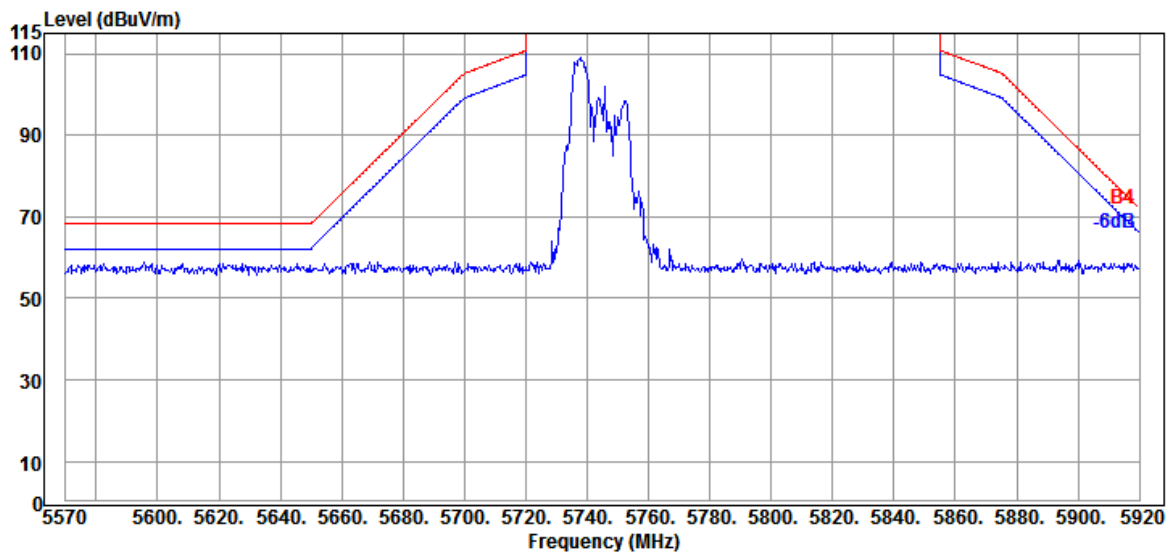


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

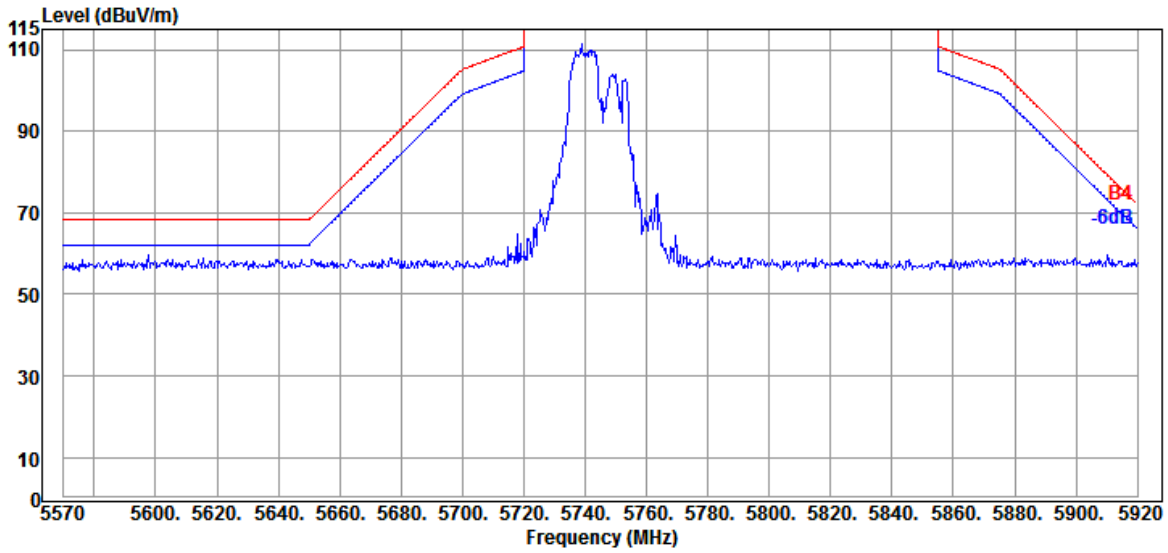


Antenna at Vertical Polarization

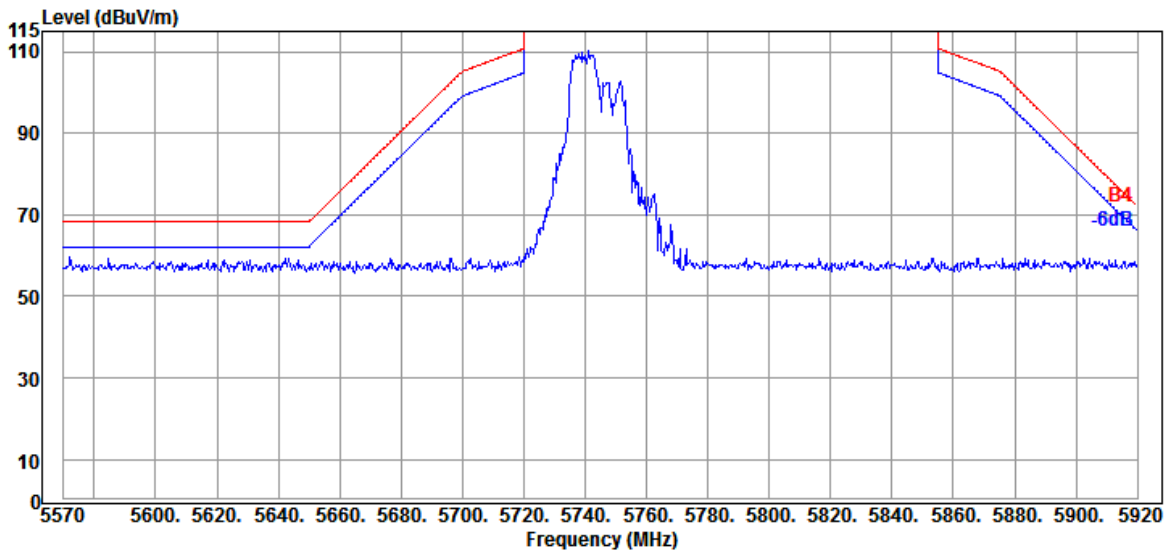


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

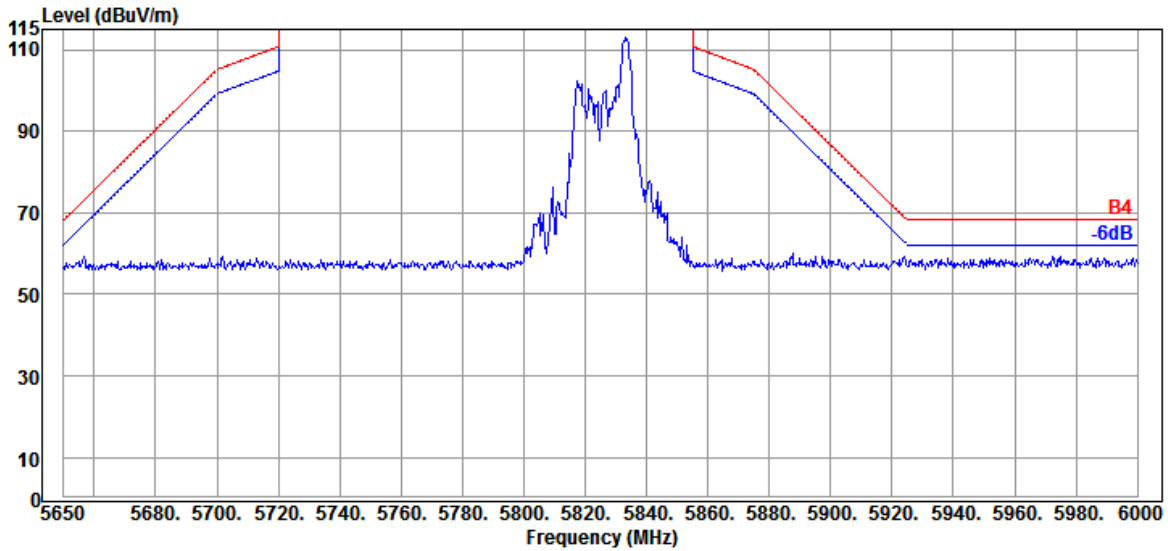


Antenna at Vertical Polarization

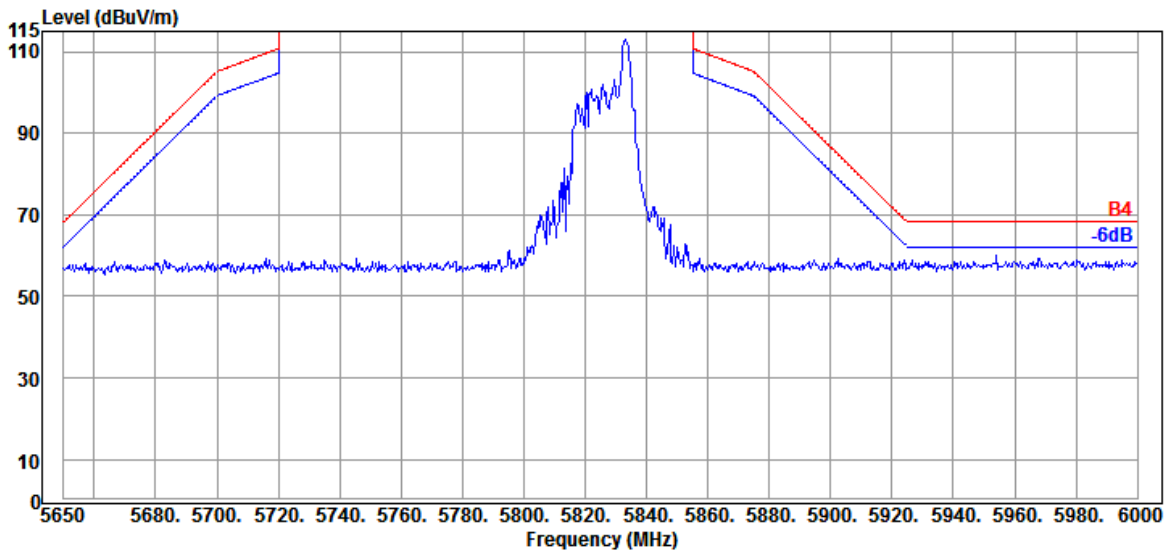


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

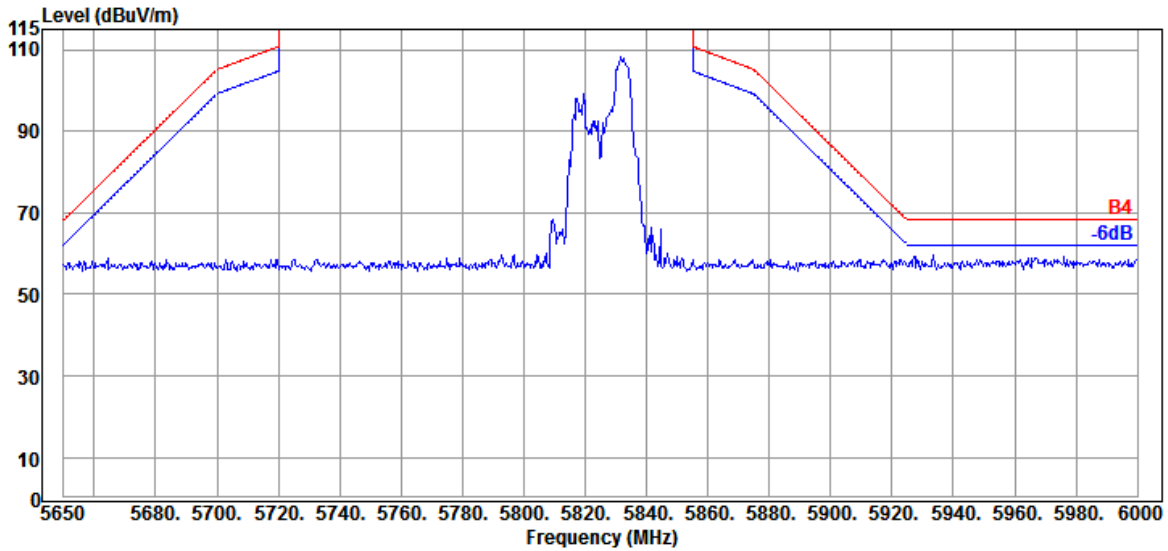


Antenna at Vertical Polarization

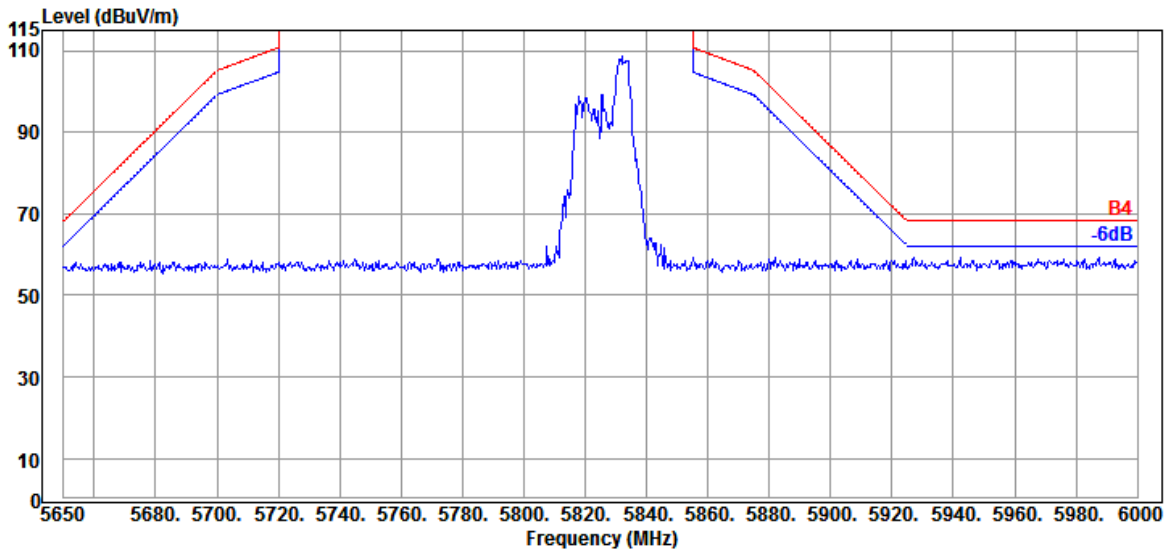


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

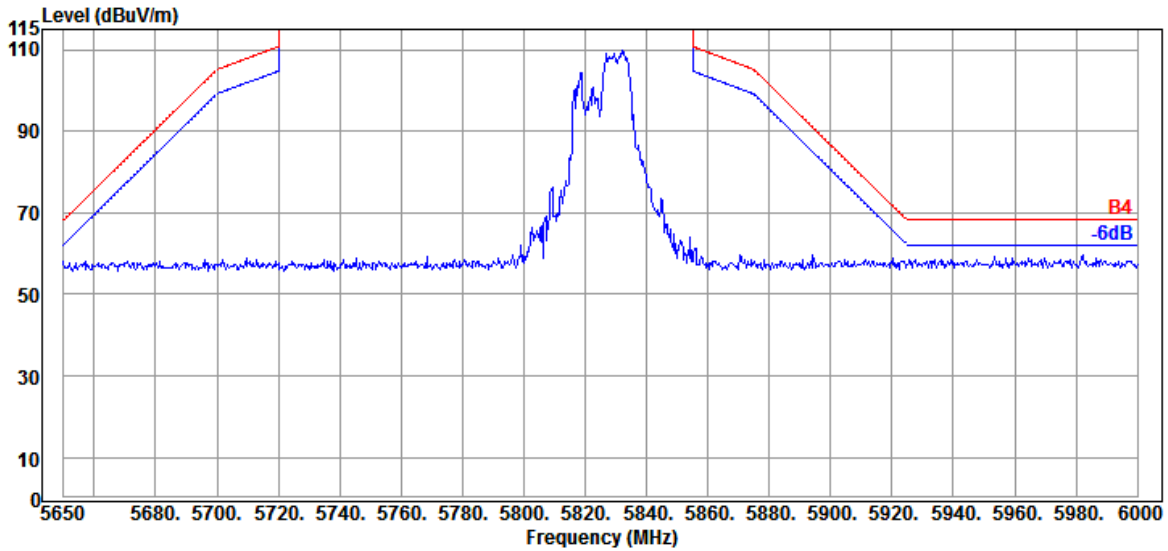

Antenna at Vertical Polarization

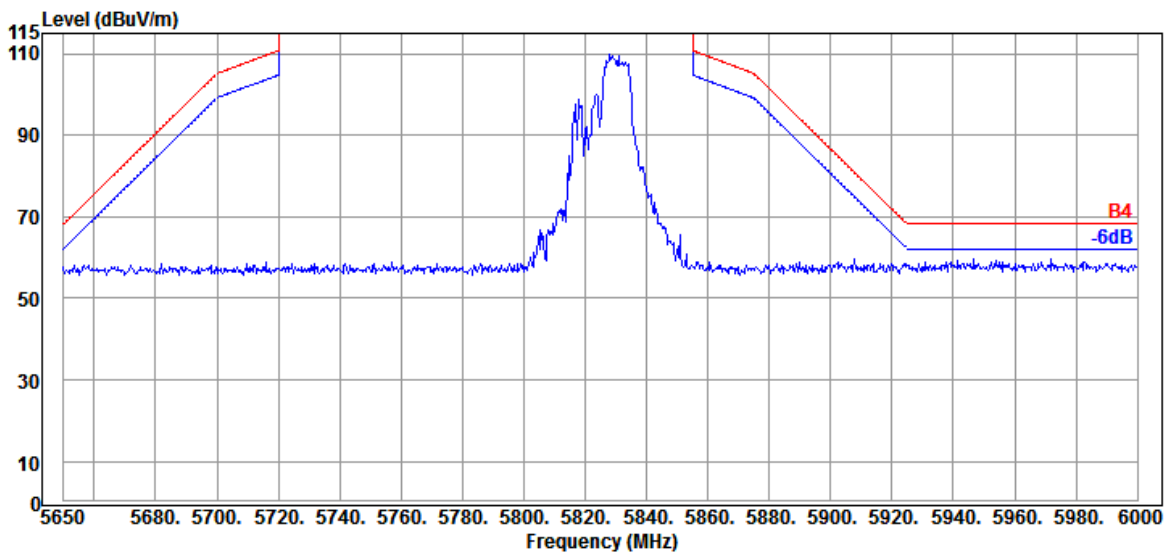


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

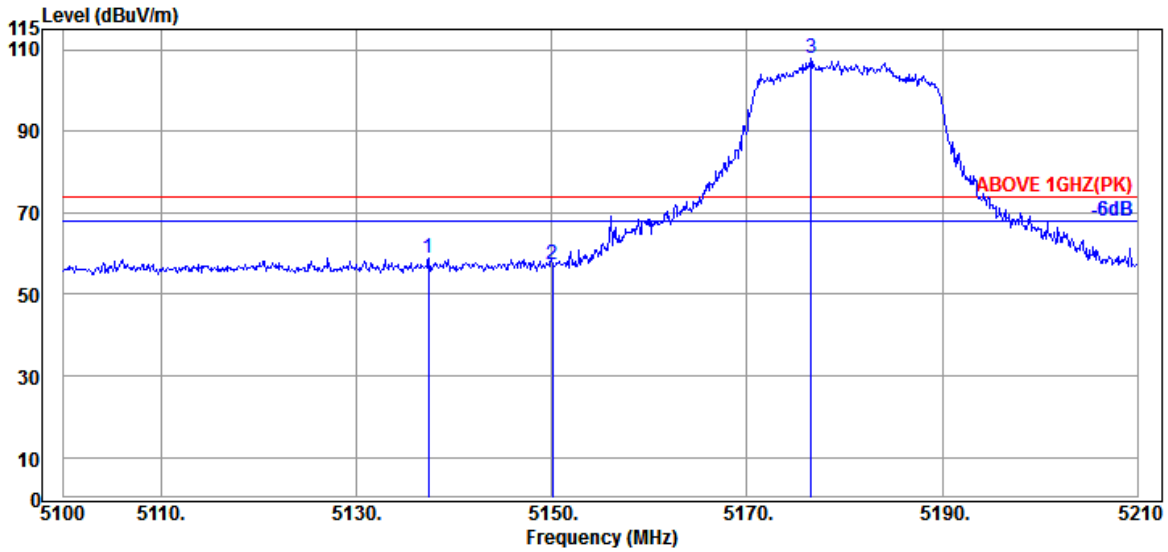

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.400	33.07	8.91	31.63	48.38	58.73	74.00	15.27	Peak
5150.050	33.10	8.92	31.63	46.93	57.32	74.00	16.68	Peak
@ 5176.560	33.17	8.95	31.63	97.31	107.80	---	---	Peak

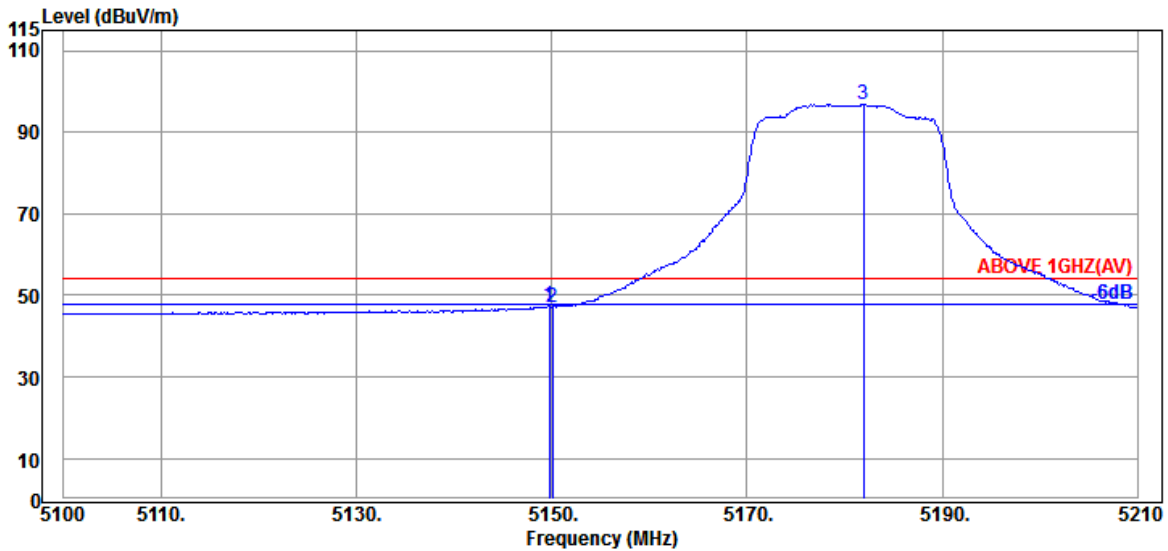


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	33.10	8.92	31.63	36.88	47.27	54.00	6.73	Average
5150.050	33.10	8.92	31.63	36.78	47.17	54.00	6.83	Average
@ 5181.950	33.17	8.95	31.63	86.34	96.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

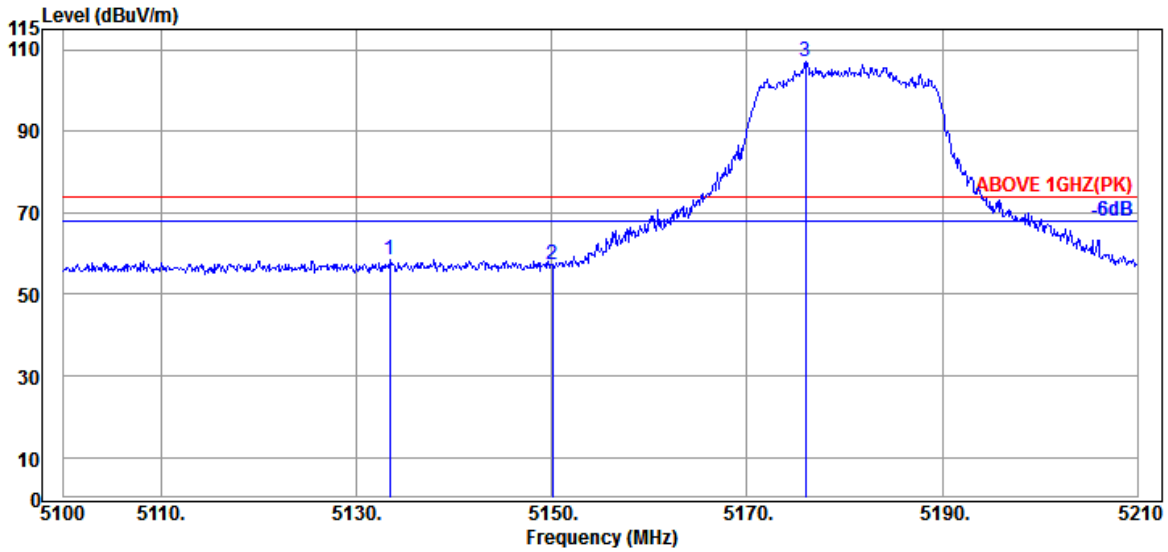

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.440	33.07	8.91	31.63	48.26	58.61	74.00	15.39	Peak
5150.050	33.10	8.92	31.63	46.85	57.24	74.00	16.76	Peak
@ 5176.010	33.17	8.95	31.63	96.53	107.02	---	---	Peak

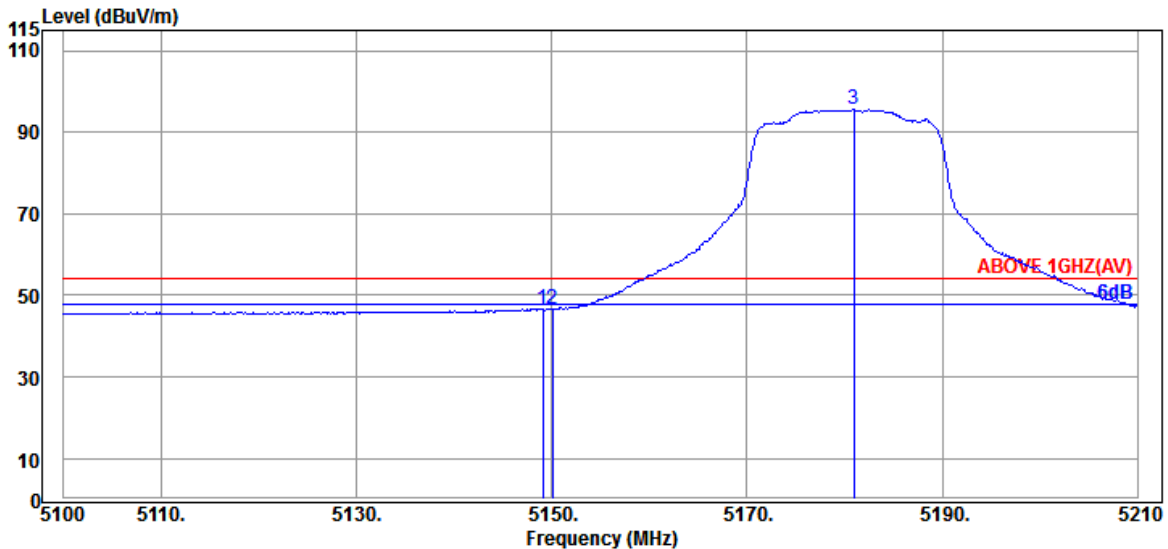


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	33.10	8.92	31.63	36.28	46.67	54.00	7.33	Average
5150.050	33.10	8.92	31.63	36.13	46.52	54.00	7.48	Average
@ 5180.960	33.17	8.95	31.63	85.20	95.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

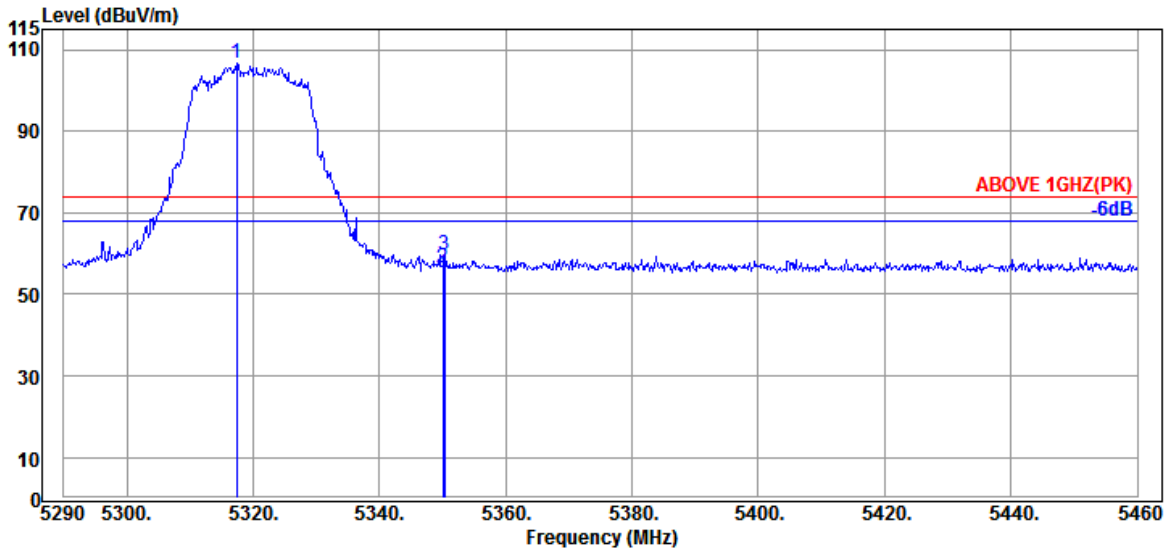

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.370	33.30	9.07	31.63	95.98	106.72	---	---	Peak
5350.010	33.50	9.10	31.63	45.58	56.55	74.00	17.45	Peak
5350.350	33.50	9.10	31.63	48.88	59.85	74.00	14.15	Peak

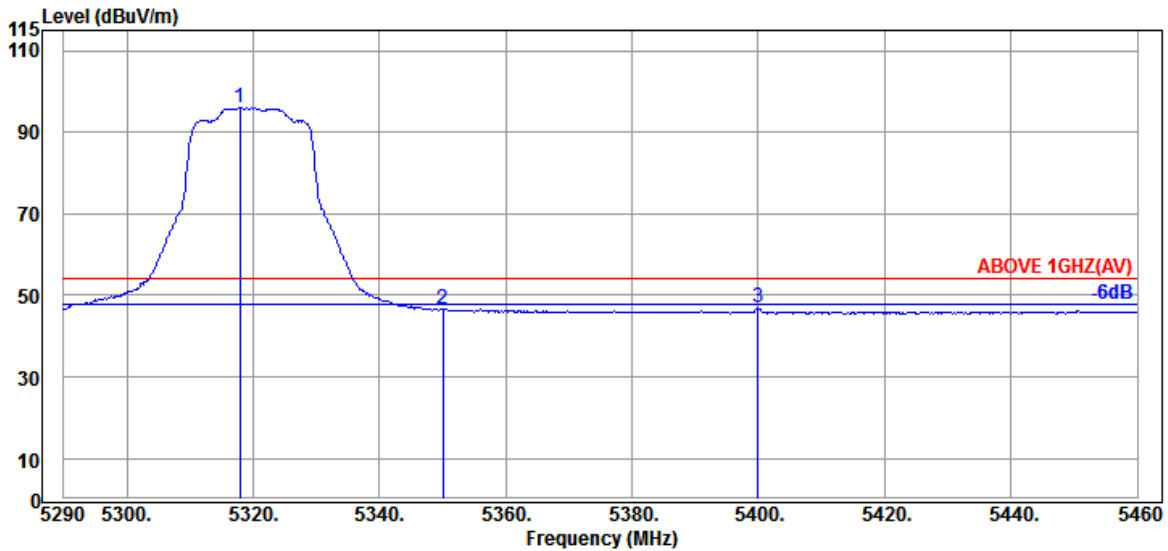


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.880	33.30	9.07	31.63	85.21	95.95	---	---	Average
5350.010	33.50	9.10	31.63	35.75	46.72	54.00	7.28	Average
5399.990	33.70	9.14	31.63	35.89	47.10	54.00	6.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

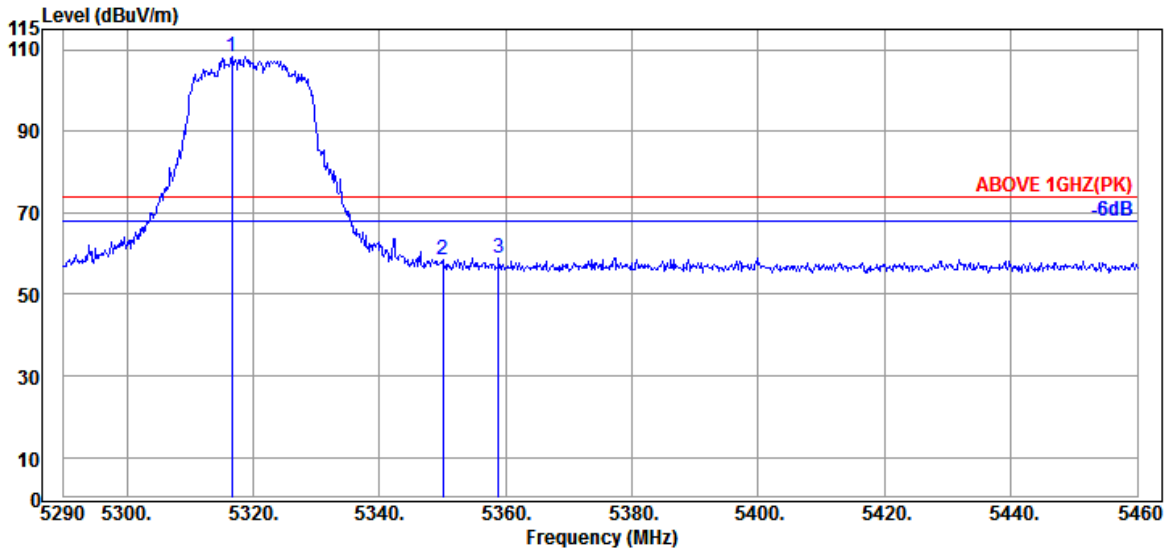

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.690	33.30	9.07	31.63	97.70	108.44	---	---	Peak
5350.010	33.50	9.10	31.63	47.41	58.38	74.00	15.62	Peak
5358.850	33.57	9.10	31.63	48.01	59.05	74.00	14.95	Peak

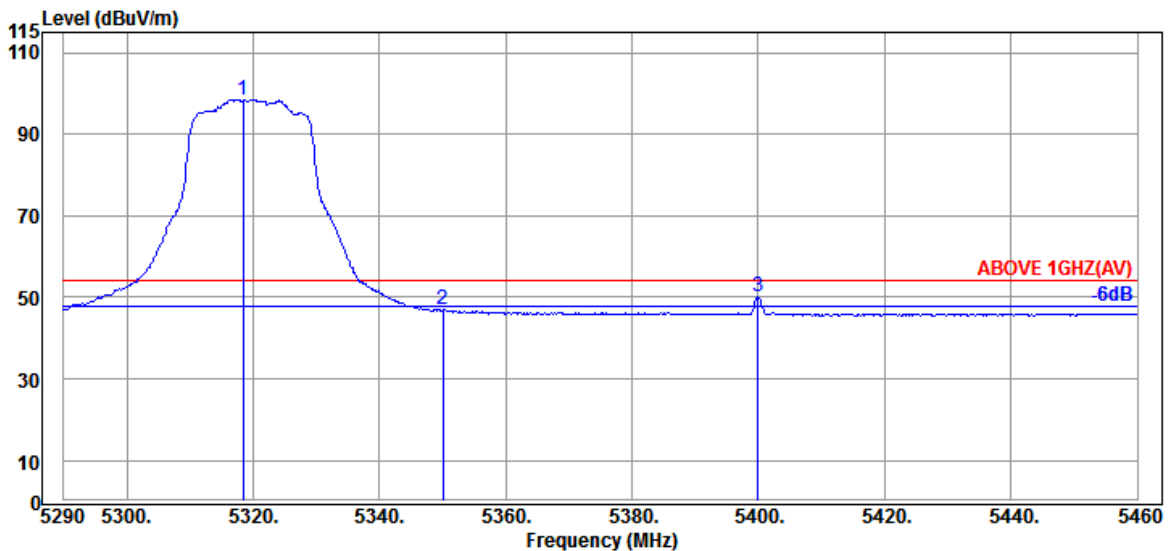


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.390	33.30	9.07	31.63	87.84	98.58	---	---	Average
5350.010	33.50	9.10	31.63	35.97	46.94	54.00	7.06	Average
5399.990	33.70	9.14	31.63	38.88	50.09	54.00	3.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

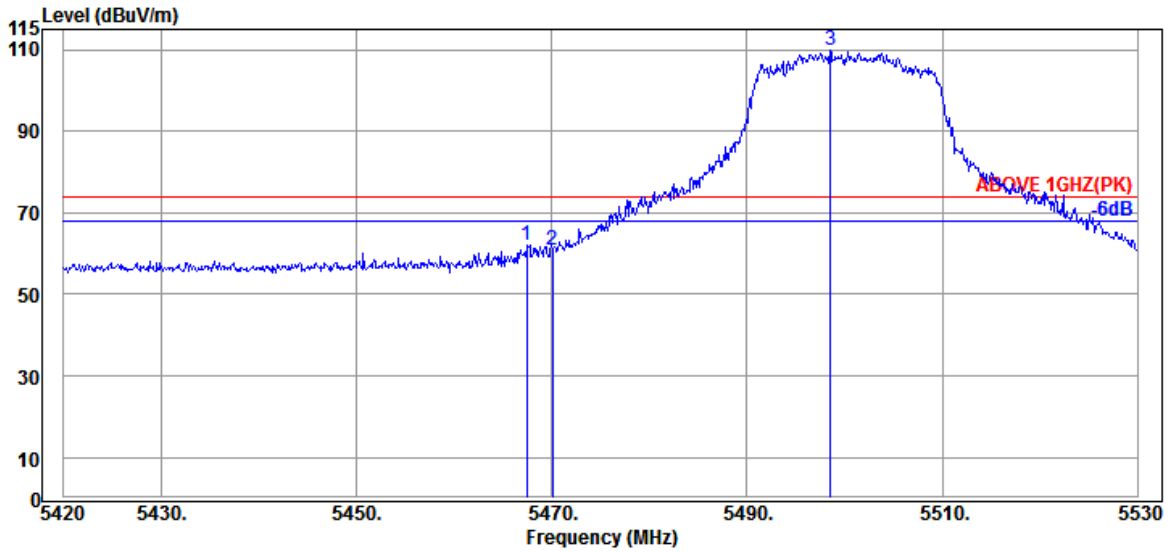

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.410	33.97	9.20	31.63	50.45	61.99	74.00	12.01	Peak
5470.050	33.97	9.20	31.63	49.34	60.88	74.00	13.12	Peak
@ 5498.540	34.10	9.23	31.63	98.14	109.84	---	---	Peak

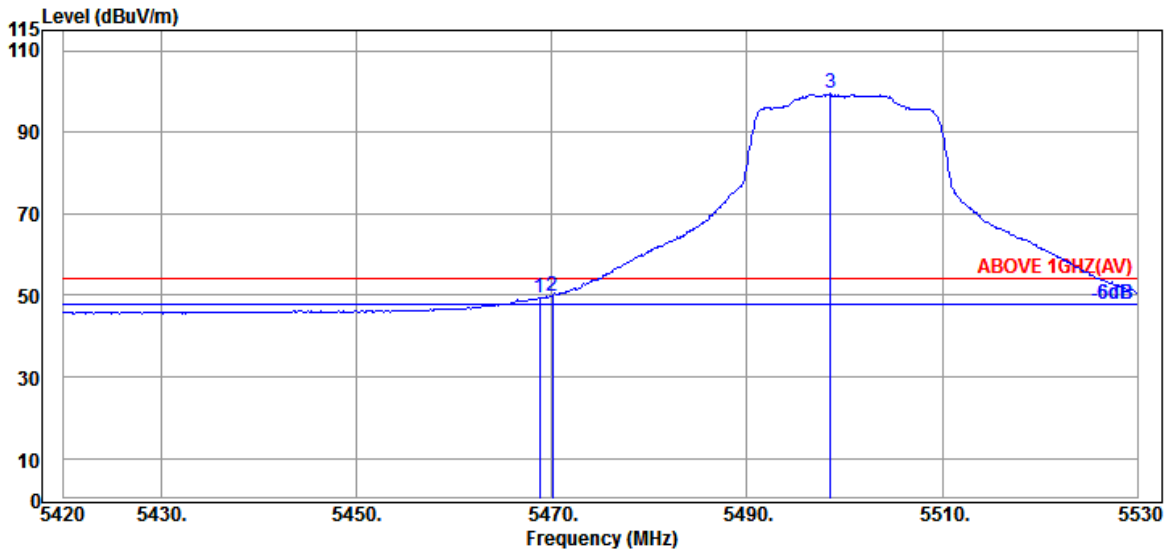


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	33.97	9.20	31.63	38.04	49.58	54.00	4.42	Average
5470.050	33.97	9.20	31.63	38.41	49.95	54.00	4.05	Average
@ 5498.540	34.10	9.23	31.63	87.83	99.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

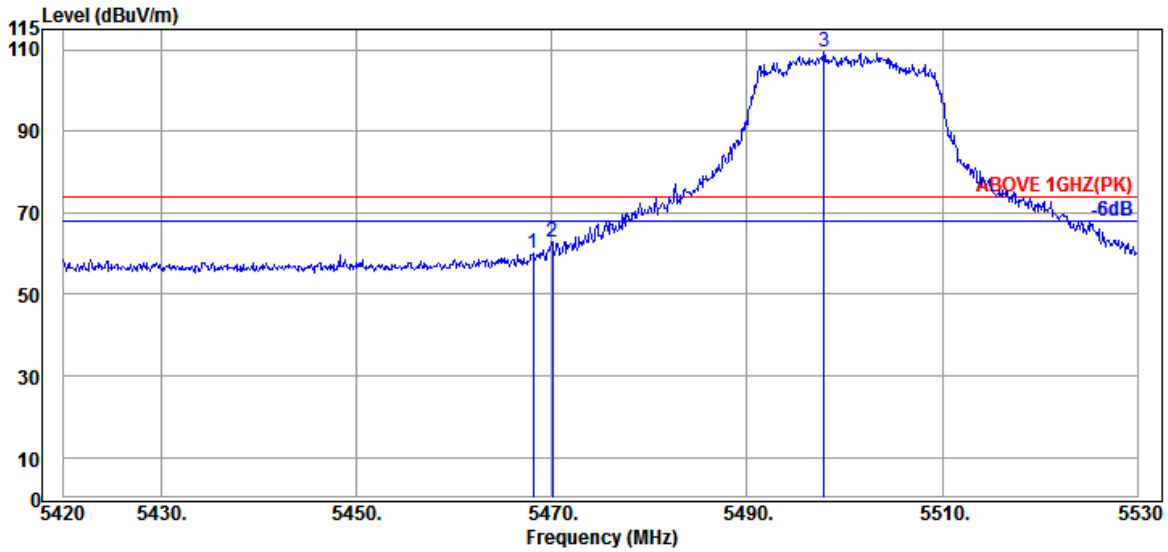

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.070	33.97	9.20	31.63	48.67	60.21	74.00	13.79	Peak
5470.050	33.97	9.20	31.63	51.33	62.87	74.00	11.13	Peak
@ 5497.880	34.10	9.23	31.63	97.76	109.46	---	---	Peak

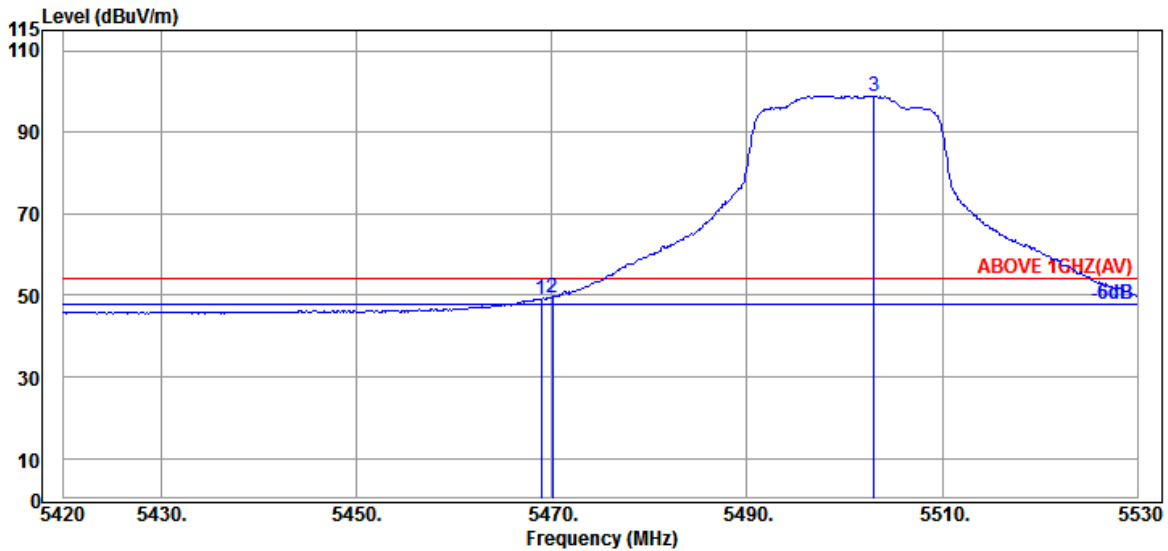


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	33.97	9.20	31.63	37.63	49.17	54.00	4.83	Average
5470.050	33.97	9.20	31.63	37.92	49.46	54.00	4.54	Average
@ 5503.050	34.10	9.23	31.63	87.29	98.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

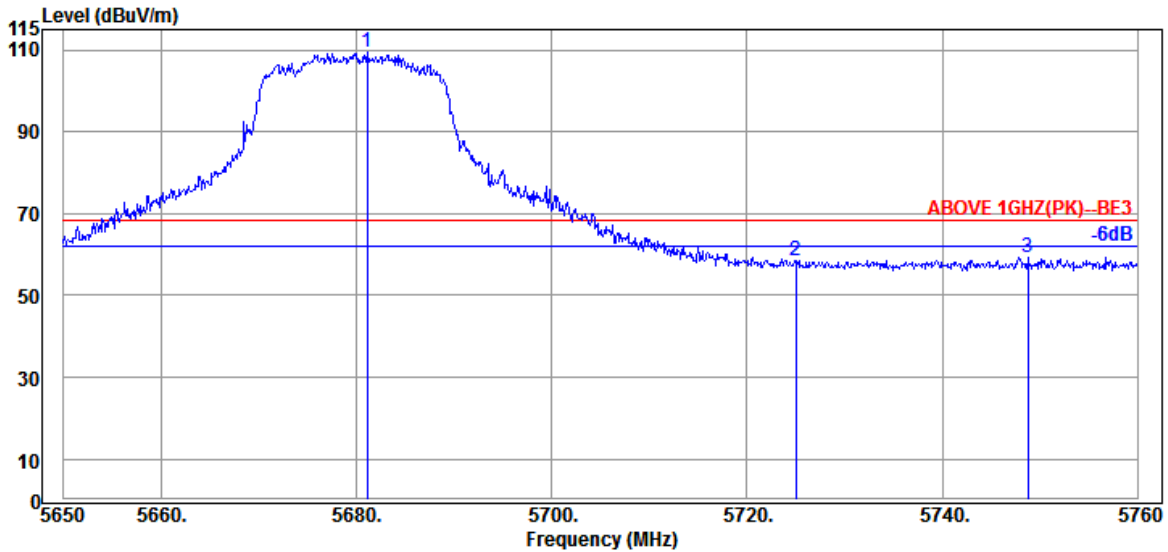

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.130	34.30	9.37	31.72	97.64	109.59	---	---	Peak
5725.020	34.50	9.42	31.74	46.46	58.64	68.20	9.56	Peak
5748.780	34.60	9.43	31.75	47.09	59.37	68.20	8.83	Peak

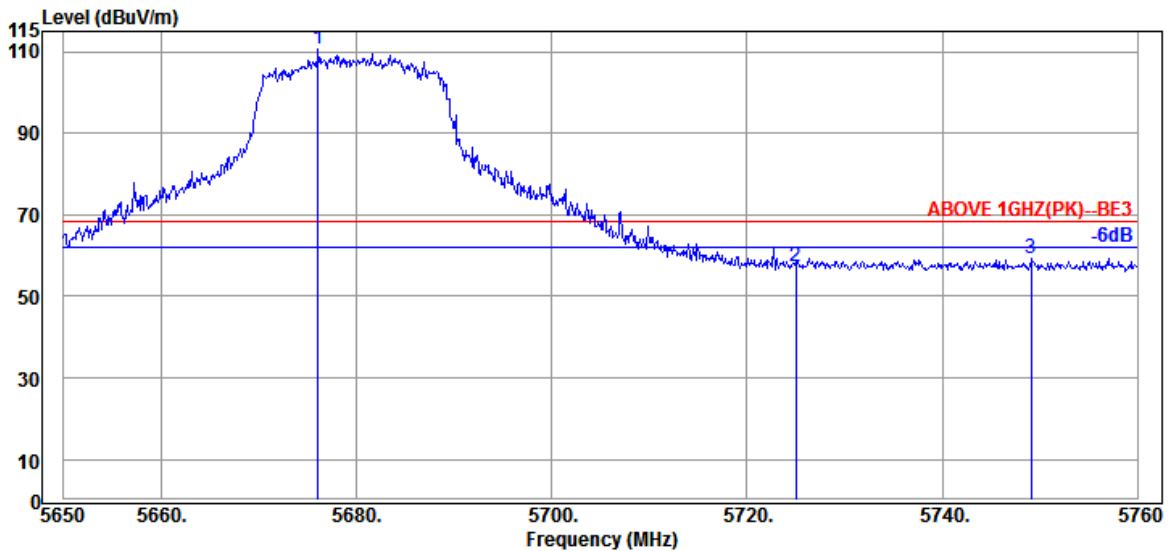


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.070	34.30	9.37	31.72	98.83	110.78	---	---	Peak
5725.020	34.50	9.42	31.74	45.08	57.26	68.20	10.94	Peak
5749.110	34.60	9.43	31.75	47.15	59.43	68.20	8.77	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

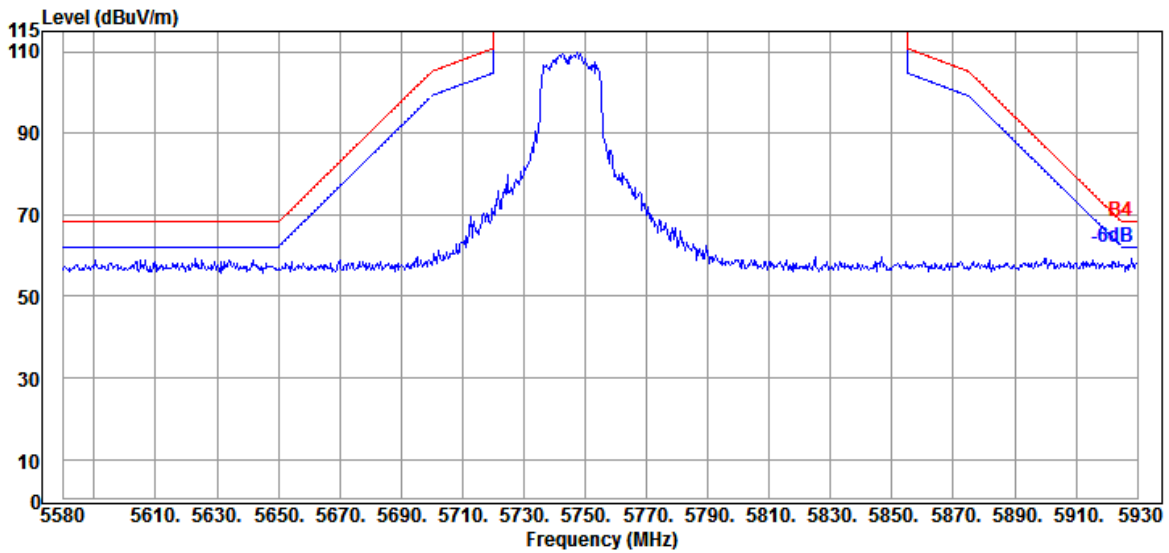


Antenna at Vertical Polarization

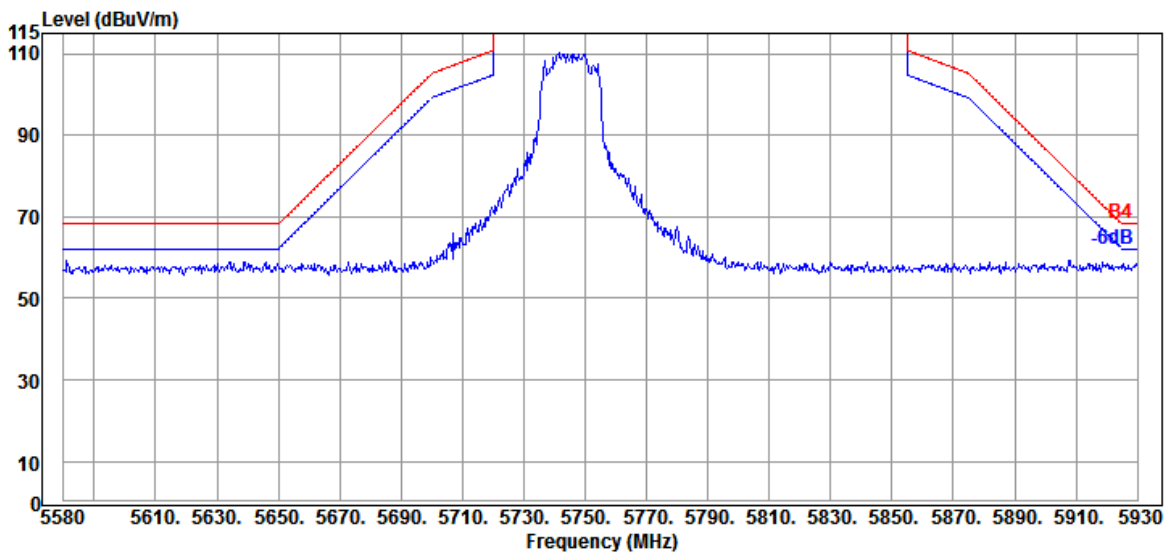


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

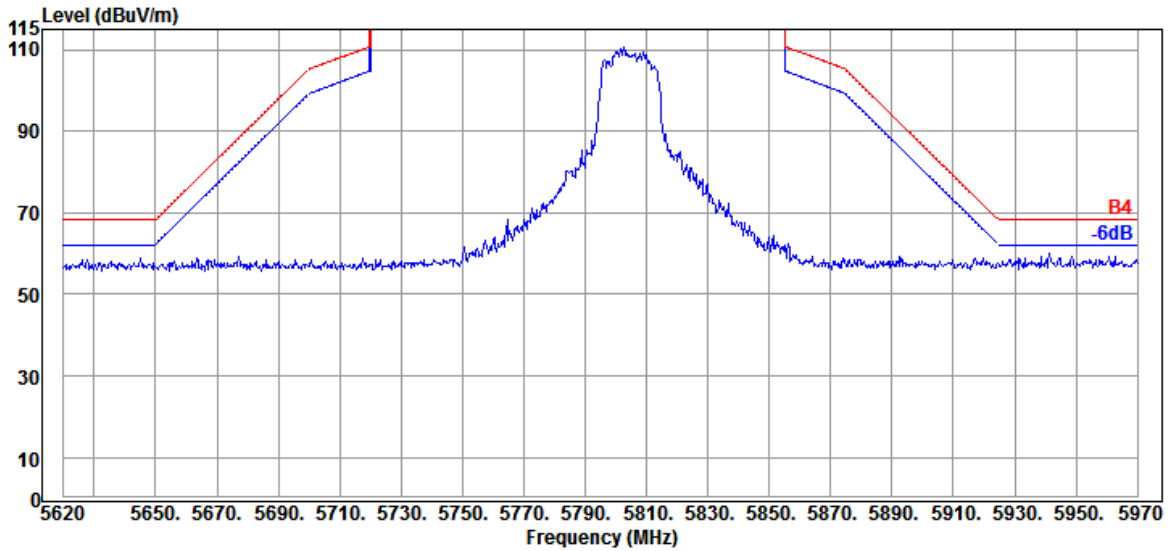

Antenna at Vertical Polarization

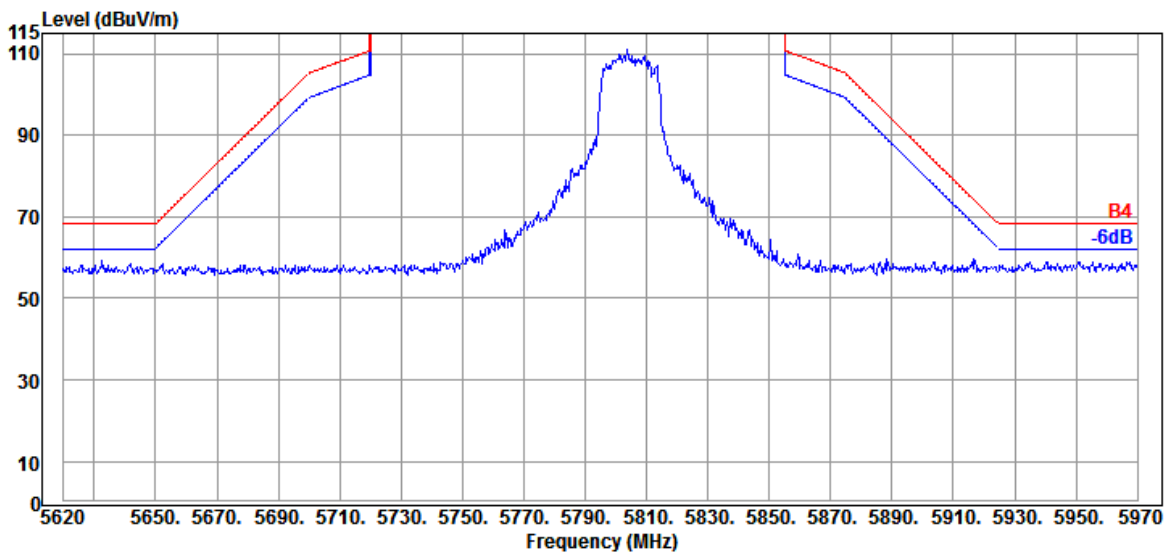


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

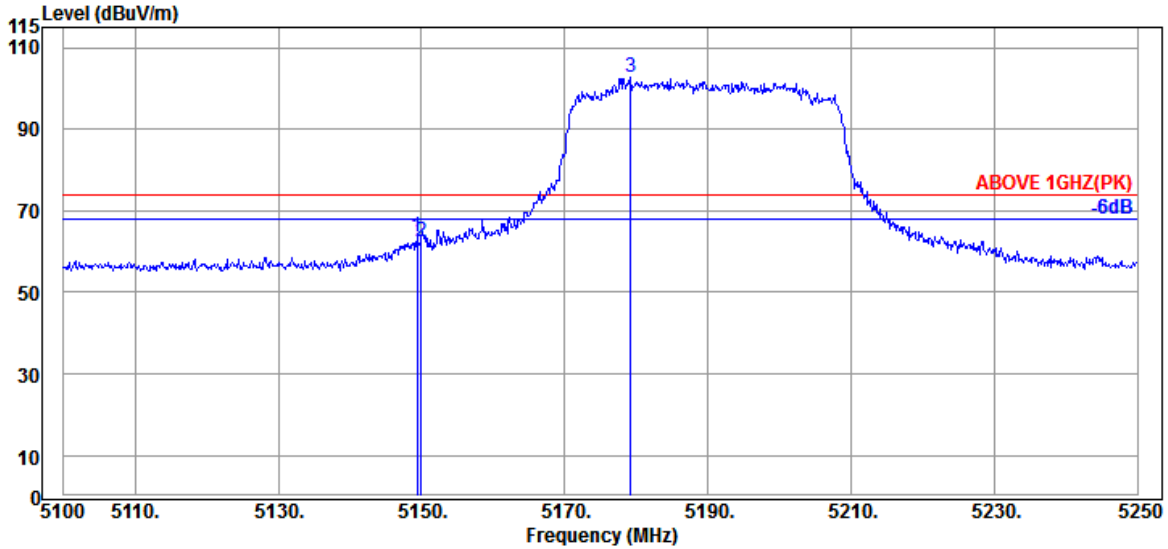

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.350	33.10	8.92	31.63	53.12	63.51	74.00	10.49	Peak
5149.950	33.10	8.92	31.63	52.19	62.58	74.00	11.42	Peak
@ 5179.200	33.17	8.95	31.63	92.40	102.89	---	---	Peak

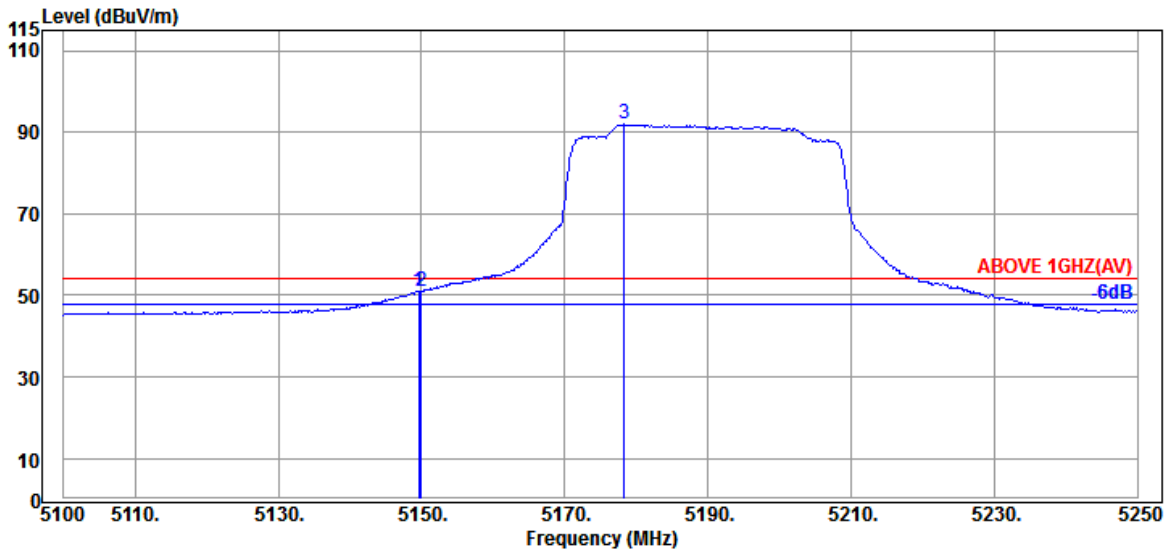


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.650	33.10	8.92	31.63	40.66	51.05	54.00	2.95	Average
5149.950	33.10	8.92	31.63	40.69	51.08	54.00	2.92	Average
@ 5178.300	33.17	8.95	31.63	81.41	91.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

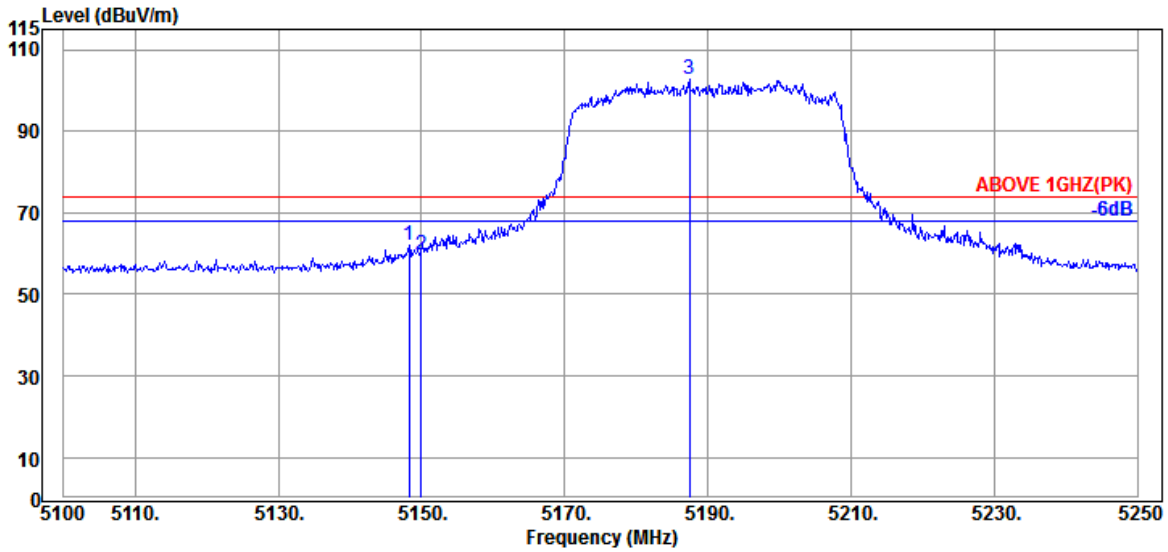

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.10	8.92	31.63	51.77	62.16	74.00	11.84	Peak
5149.950	33.10	8.92	31.63	49.43	59.82	74.00	14.18	Peak
@ 5187.450	33.20	8.95	31.63	92.18	102.70	---	---	Peak

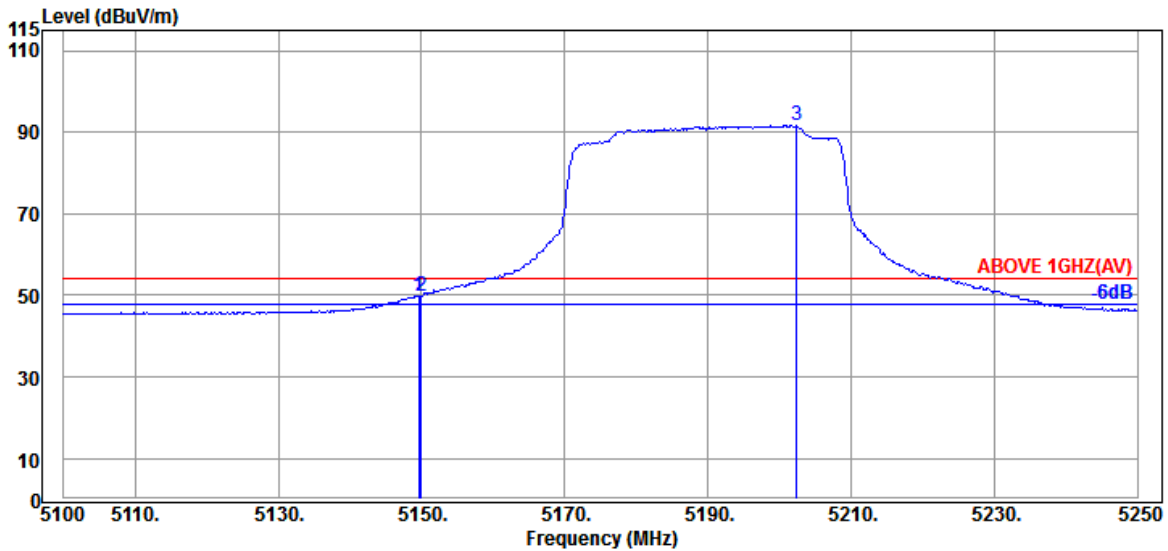


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.10	8.92	31.63	39.40	49.79	54.00	4.21	Average
5149.950	33.10	8.92	31.63	39.32	49.71	54.00	4.29	Average
@ 5202.450	33.17	8.96	31.63	81.19	91.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

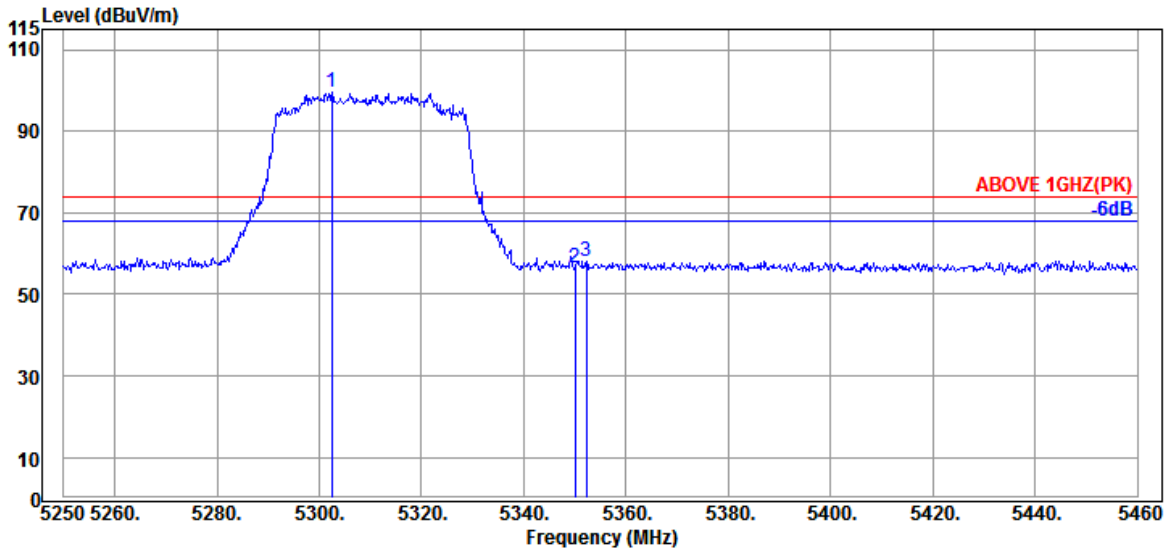

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	33.20	9.05	31.63	88.89	99.51	---	---	Peak
5349.960	33.50	9.10	31.63	45.67	56.64	74.00	17.36	Peak
5352.270	33.50	9.10	31.63	47.15	58.12	74.00	15.88	Peak

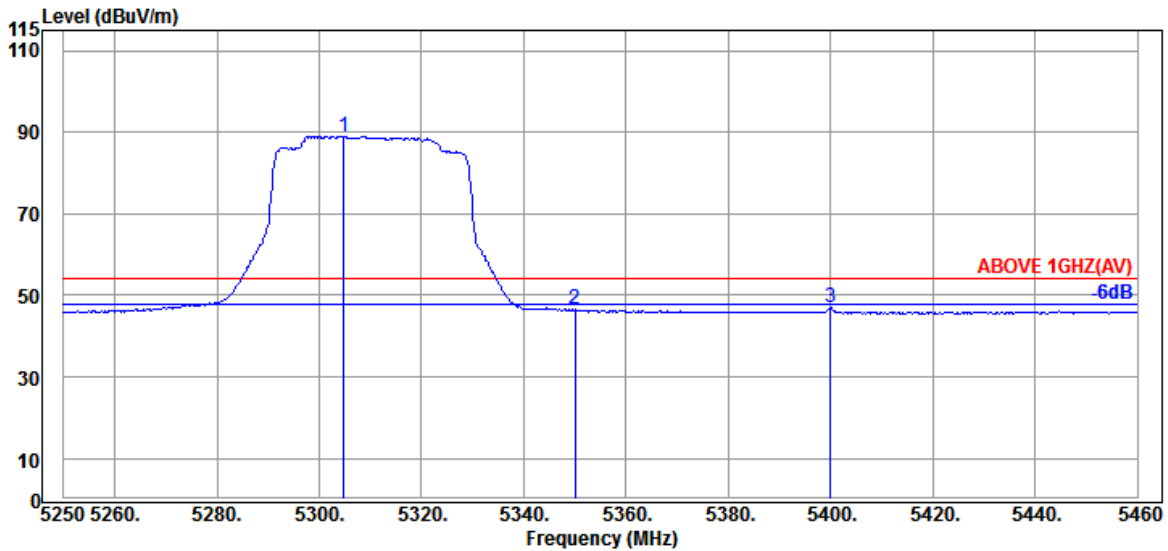


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.810	33.20	9.05	31.63	78.39	89.01	---	---	Average
5349.960	33.50	9.10	31.63	35.48	46.45	54.00	7.55	Average
5399.940	33.70	9.14	31.63	35.85	47.06	54.00	6.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

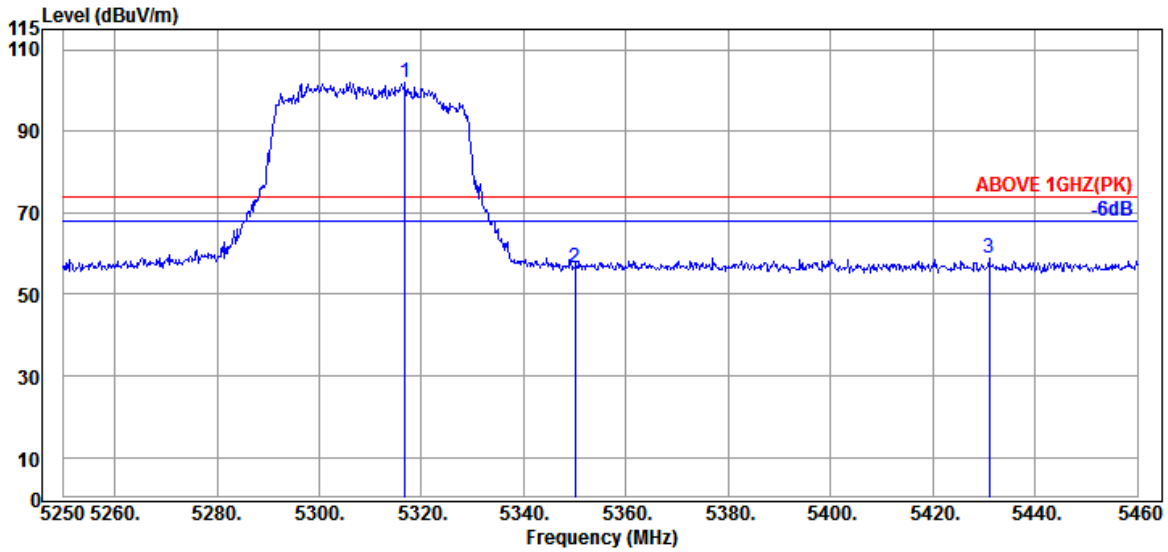

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.780	33.30	9.07	31.63	91.19	101.93	---	---	Peak
5349.960	33.50	9.10	31.63	45.61	56.58	74.00	17.42	Peak
5431.020	33.80	9.17	31.63	47.44	58.78	74.00	15.22	Peak

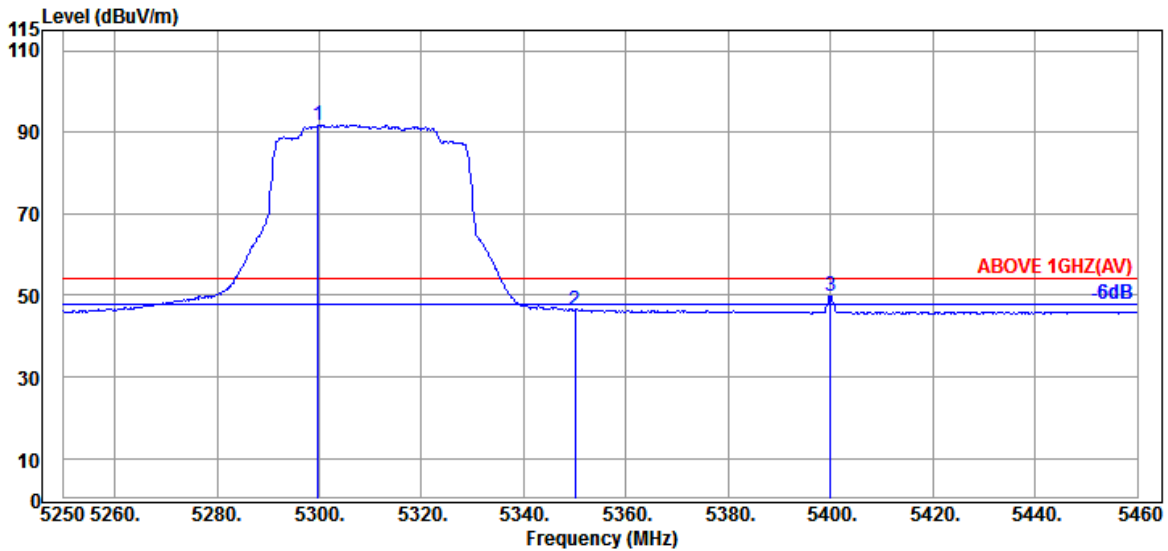


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.770	33.20	9.05	31.63	81.20	91.82	---	---	Average
5349.960	33.50	9.10	31.63	35.31	46.28	54.00	7.72	Average
5399.940	33.70	9.14	31.63	38.63	49.84	54.00	4.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

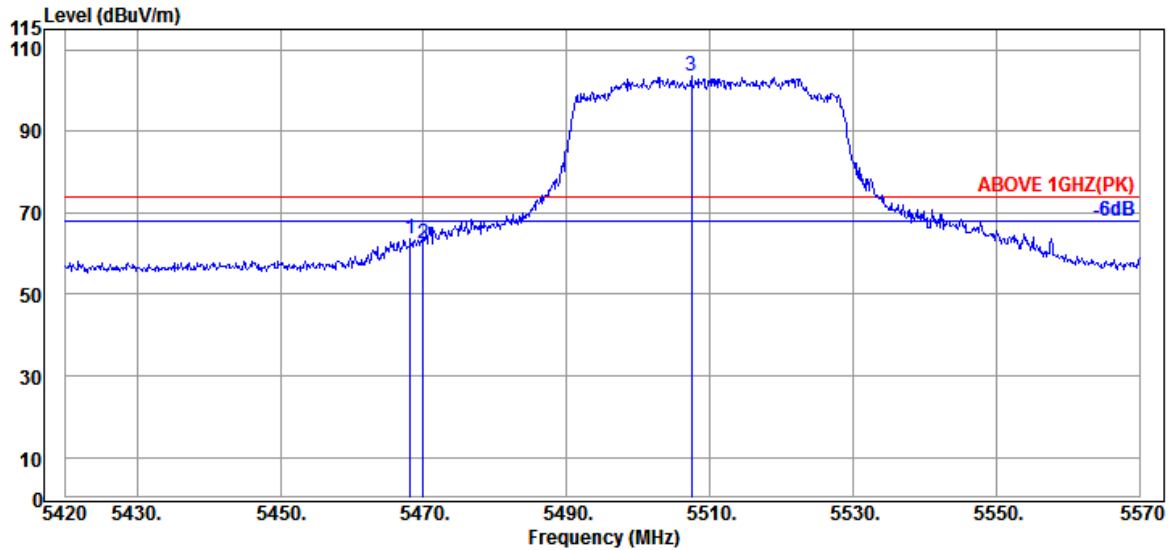

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	33.97	9.20	31.63	52.15	63.69	74.00	10.31	Peak
5469.950	33.97	9.20	31.63	50.85	62.39	74.00	11.61	Peak
@ 5507.450	34.10	9.23	31.64	92.02	103.71	---	---	Peak

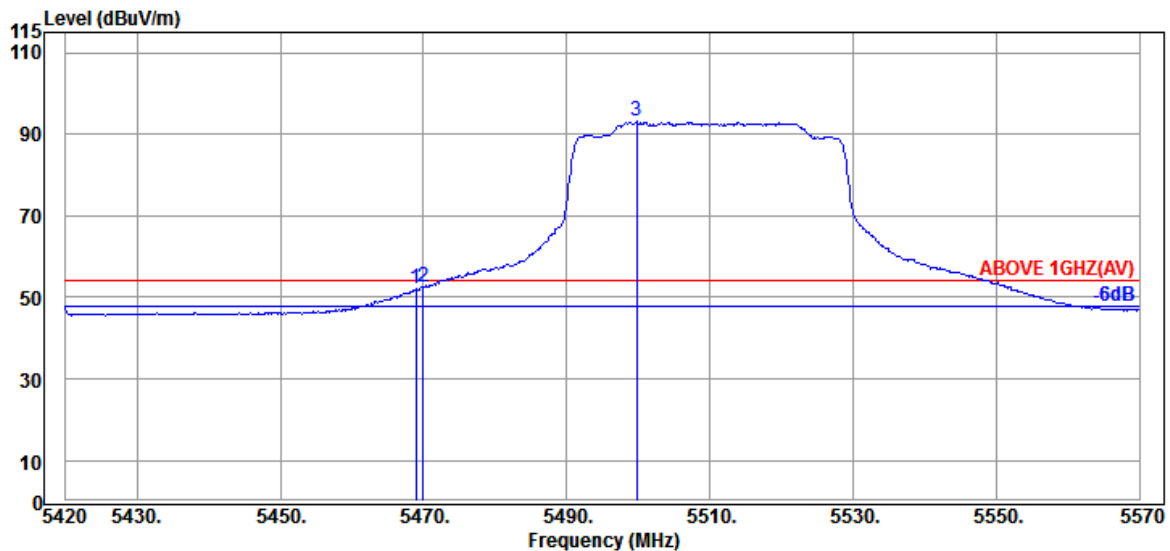


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	40.43	51.97	54.00	2.03	Average
5469.950	33.97	9.20	31.63	40.88	52.42	54.00	1.58	Average
@ 5499.800	34.10	9.23	31.63	81.38	93.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

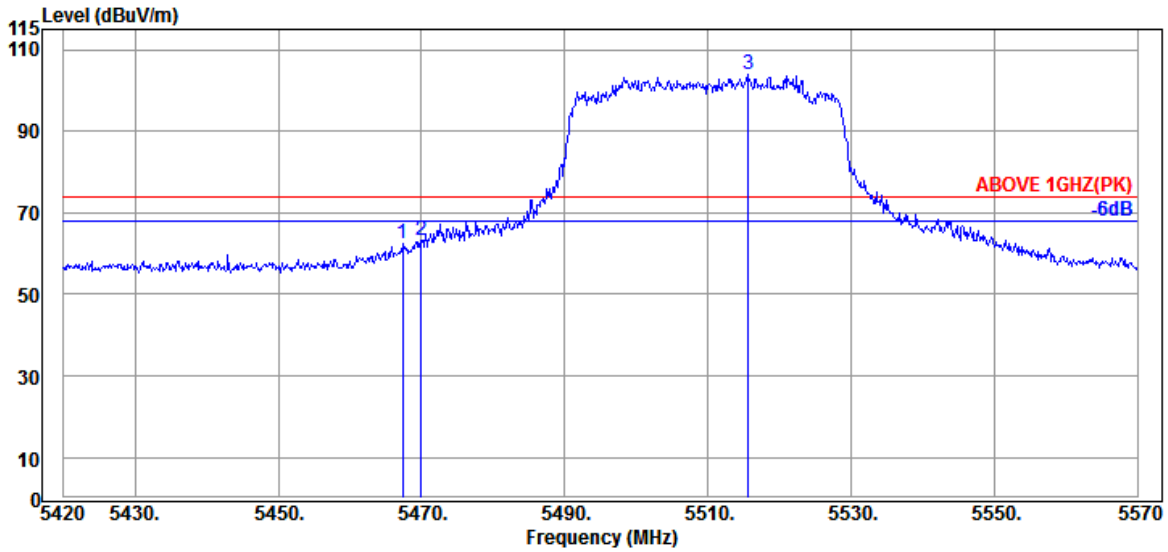

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	33.97	9.20	31.63	51.02	62.56	74.00	11.44	Peak
5469.950	33.97	9.20	31.63	51.80	63.34	74.00	10.66	Peak
@ 5515.700	34.13	9.24	31.64	92.15	103.88	---	---	Peak

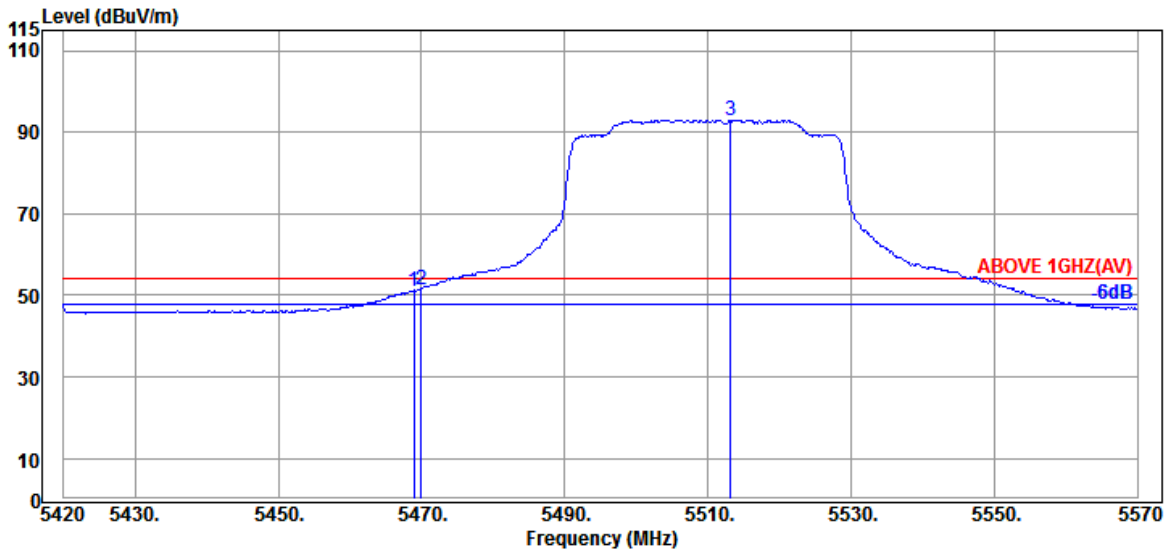


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	39.60	51.14	54.00	2.86	Average
5469.950	33.97	9.20	31.63	39.91	51.45	54.00	2.55	Average
@ 5513.150	34.13	9.23	31.64	81.33	93.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

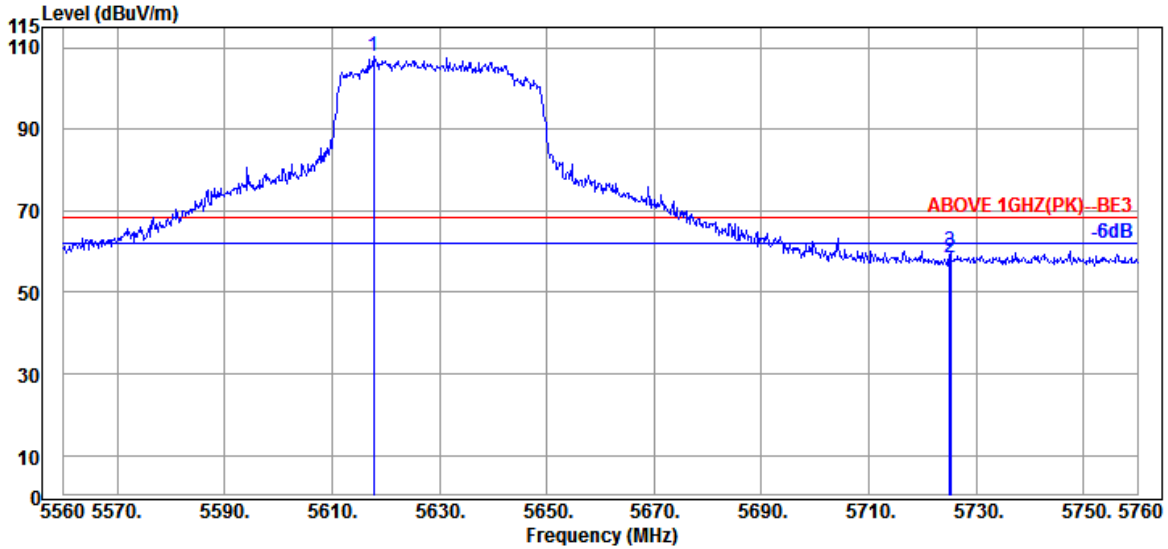

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5617.800	34.23	9.33	31.69	96.21	108.08	---	---	Peak
	5725.000	34.50	9.42	31.74	46.43	58.61	68.20	9.59	Peak
	5725.200	34.50	9.42	31.74	48.00	60.18	68.20	8.02	Peak

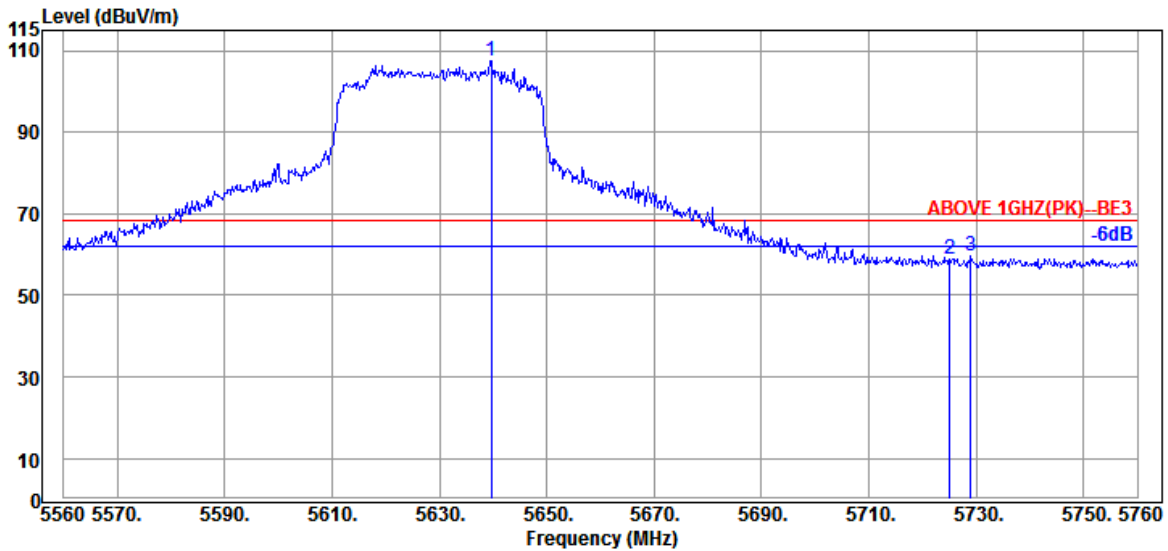


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5639.600	34.27	9.34	31.70	95.63	107.54	---	---	Peak
	5725.000	34.50	9.42	31.74	46.80	58.98	68.20	9.22	Peak
	5729.000	34.50	9.42	31.75	47.68	59.85	68.20	8.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

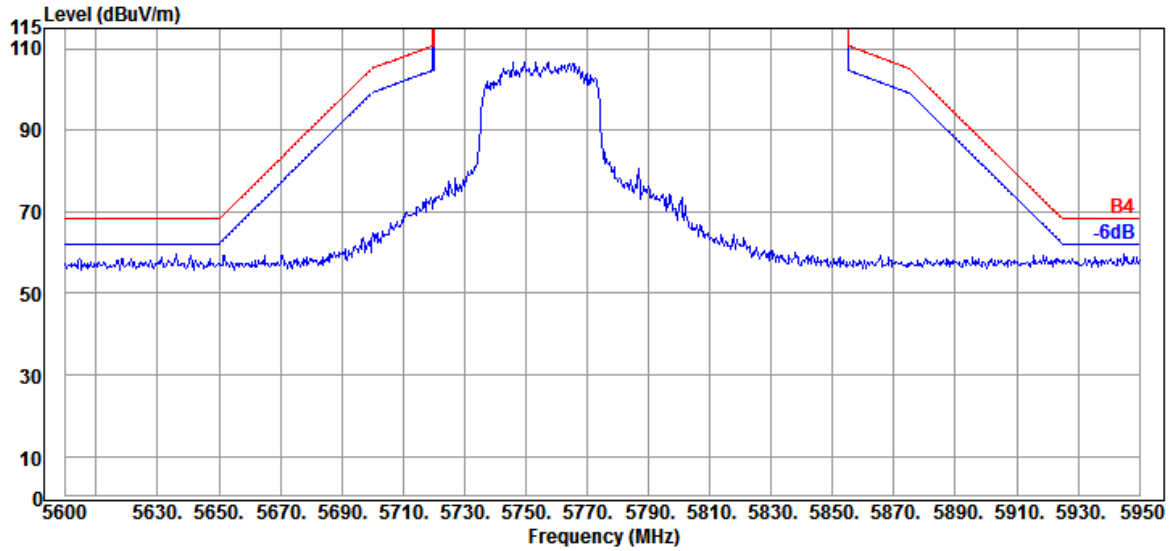


Antenna at Vertical Polarization

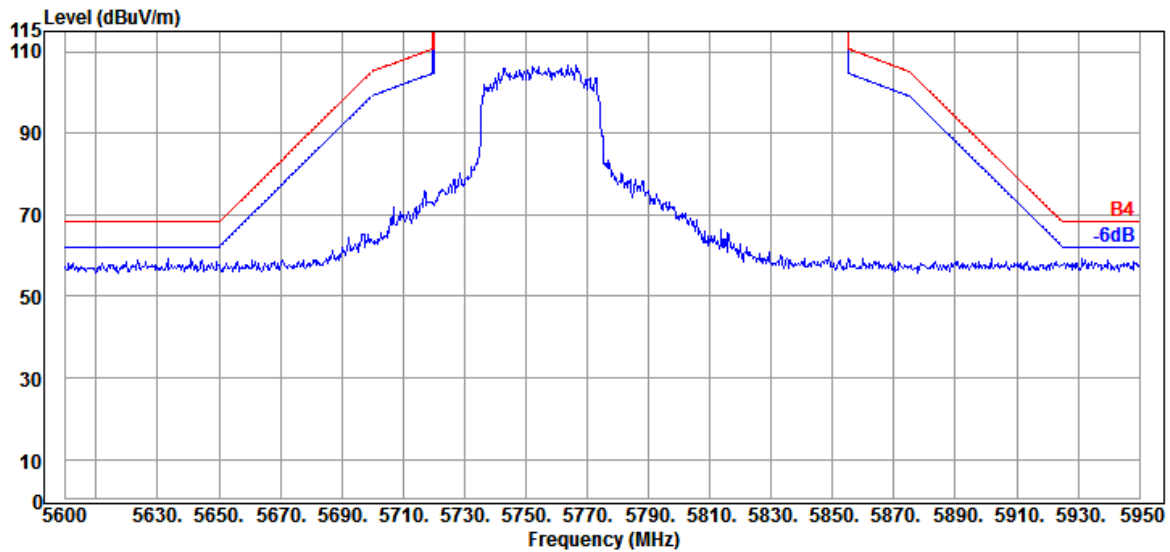


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

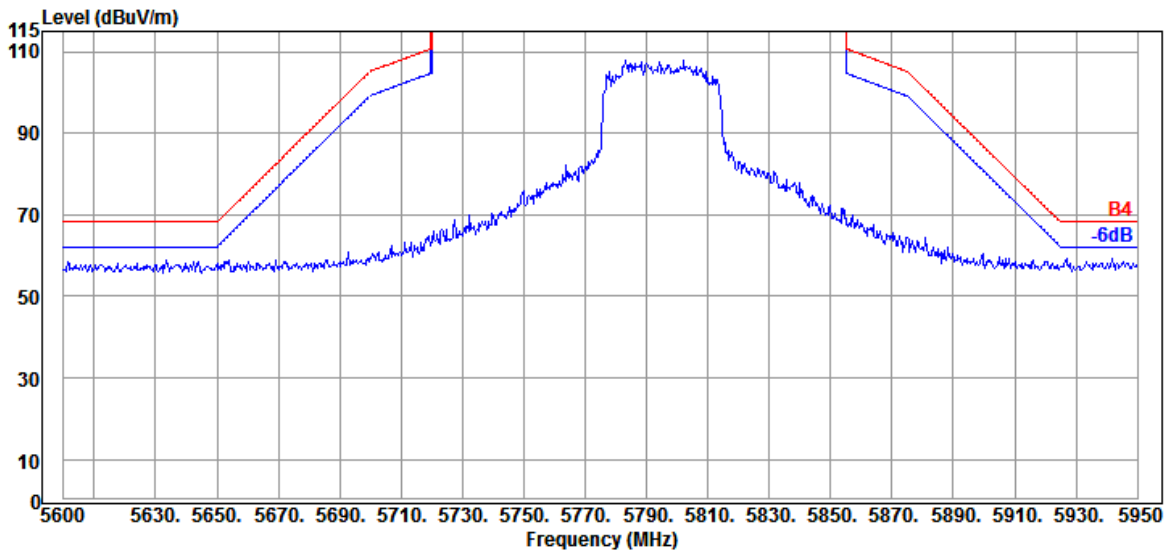

Antenna at Vertical Polarization

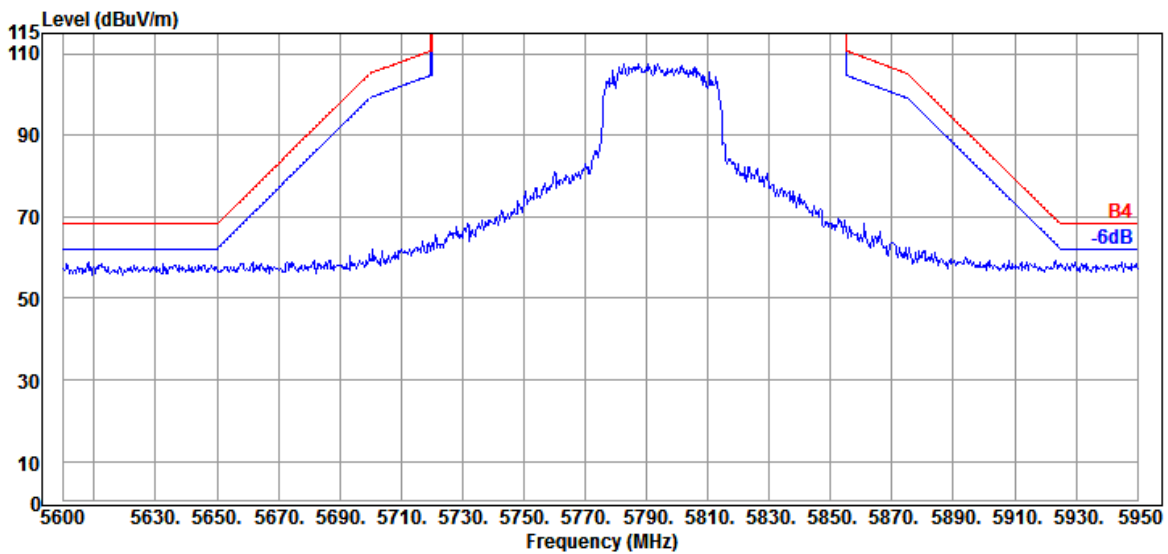


Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

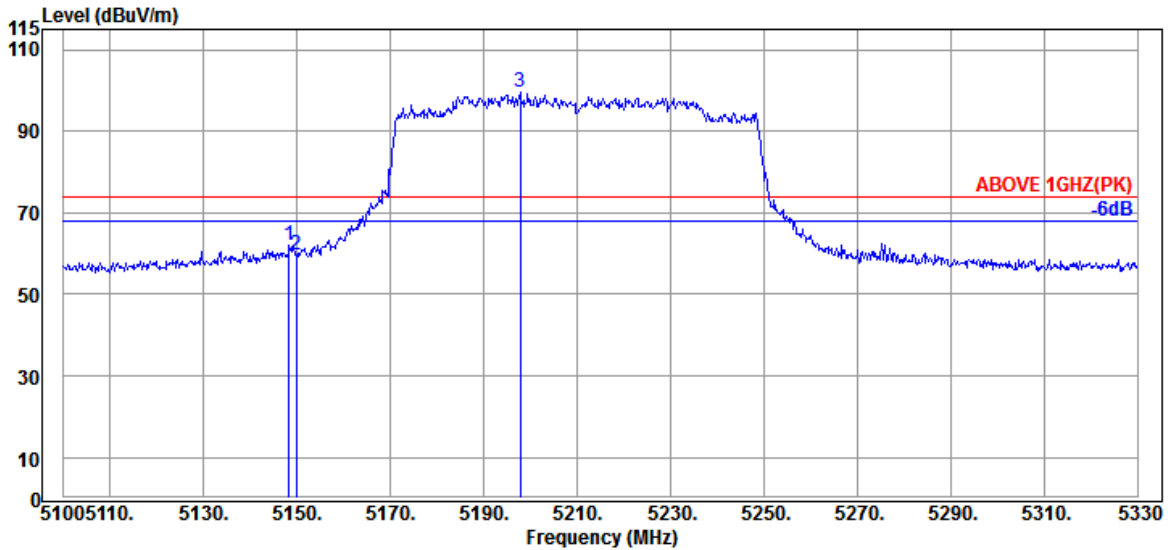

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.10	8.92	31.63	51.68	62.07	74.00	11.93	Peak
5149.910	33.10	8.92	31.63	49.43	59.82	74.00	14.18	Peak
@ 5197.750	33.20	8.96	31.63	88.87	99.40	---	---	Peak

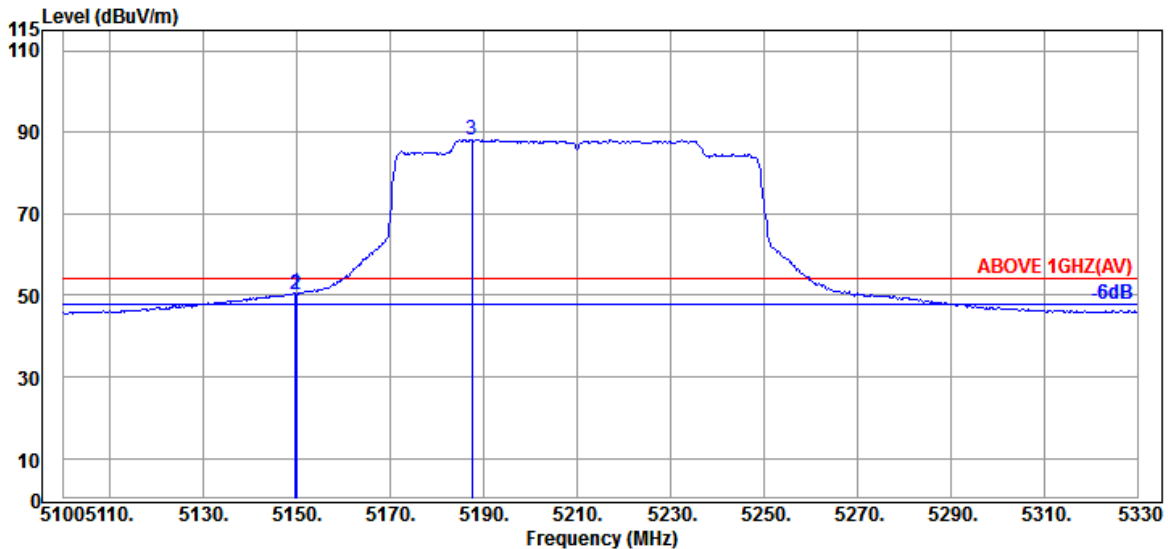


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	33.10	8.92	31.63	40.14	50.53	54.00	3.47	Average
5149.910	33.10	8.92	31.63	39.83	50.22	54.00	3.78	Average
@ 5187.400	33.20	8.95	31.63	77.69	88.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

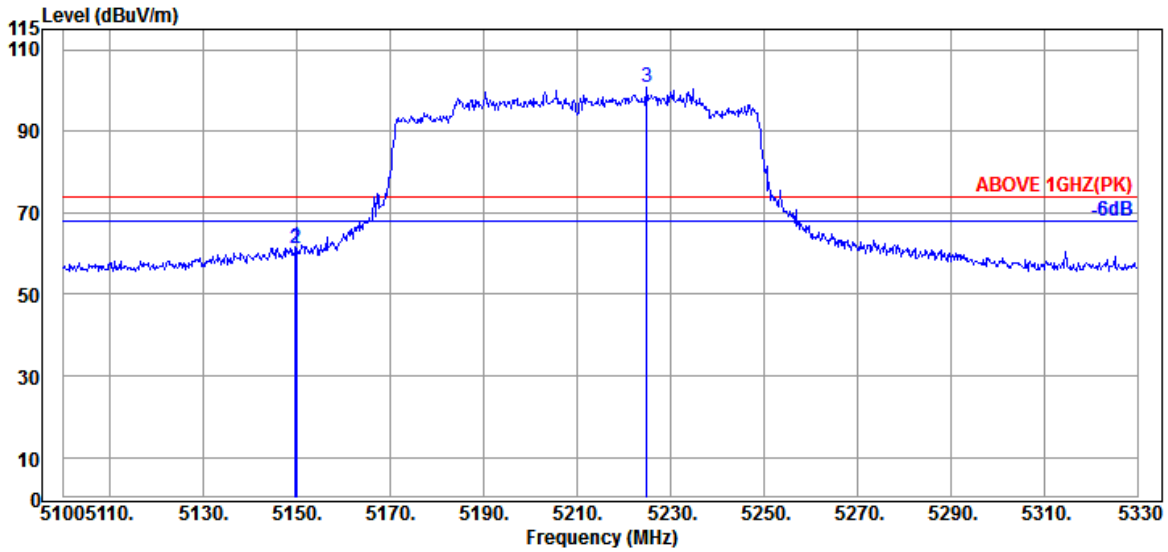

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	33.10	8.92	31.63	51.17	61.56	74.00	12.44	Peak
5149.910	33.10	8.92	31.63	50.75	61.14	74.00	12.86	Peak
@ 5224.890	33.15	8.99	31.63	90.25	100.76	---	---	Peak

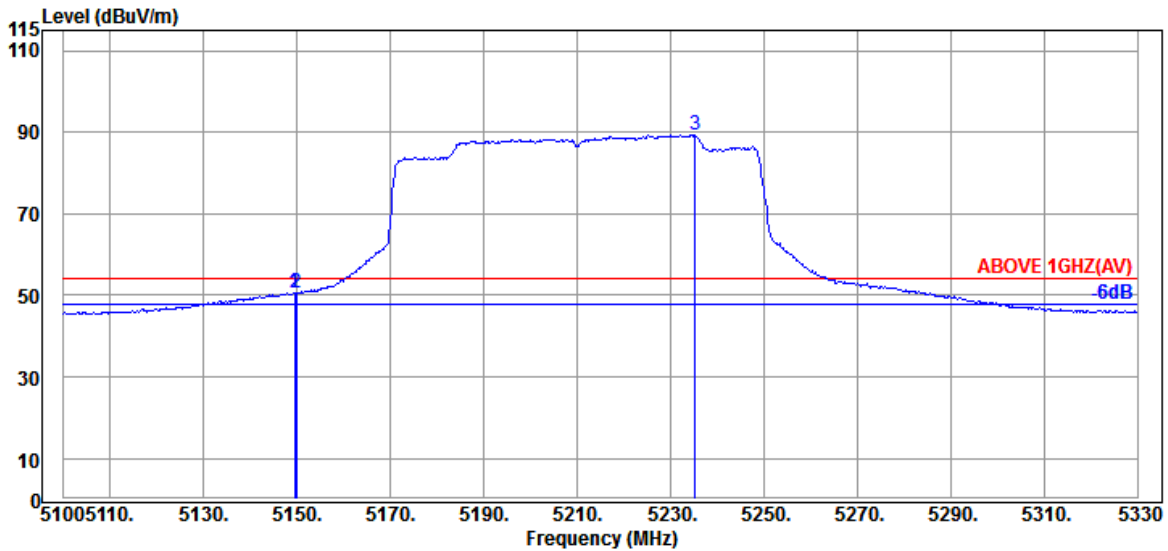


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	33.10	8.92	31.63	40.12	50.51	54.00	3.49	Average
5149.910	33.10	8.92	31.63	40.15	50.54	54.00	3.46	Average
@ 5235.240	33.12	8.99	31.63	78.94	89.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

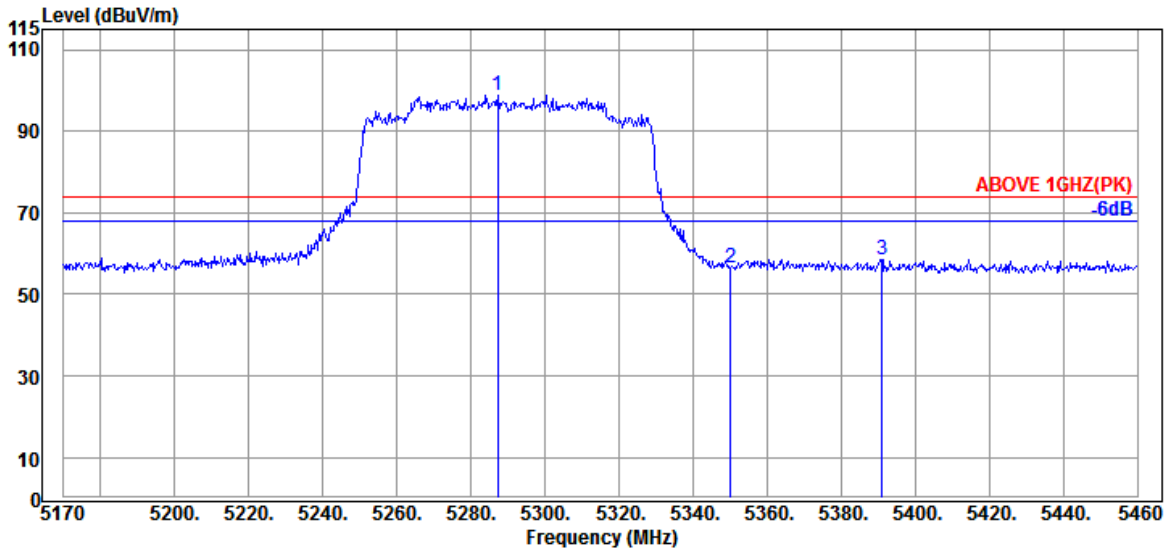

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.160	33.17	9.04	31.63	88.40	98.98	---	---	Peak
5350.090	33.50	9.10	31.63	45.66	56.63	74.00	17.37	Peak
5390.980	33.70	9.13	31.63	47.38	58.58	74.00	15.42	Peak

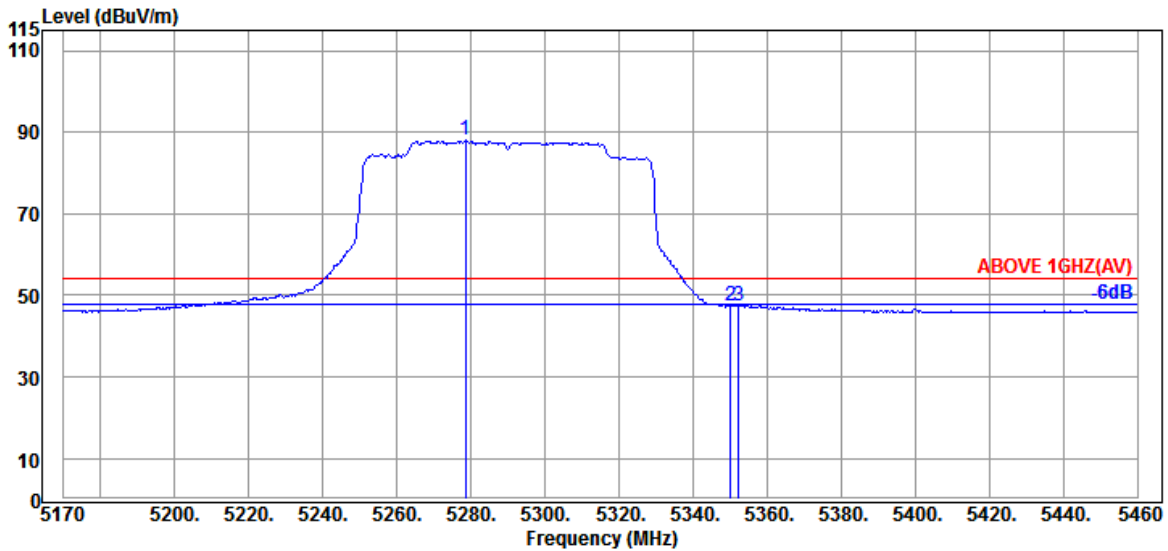


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.460	33.17	9.04	31.63	77.36	87.94	---	---	Average
5350.090	33.50	9.10	31.63	36.40	47.37	54.00	6.63	Average
5352.410	33.50	9.10	31.63	36.47	47.44	54.00	6.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

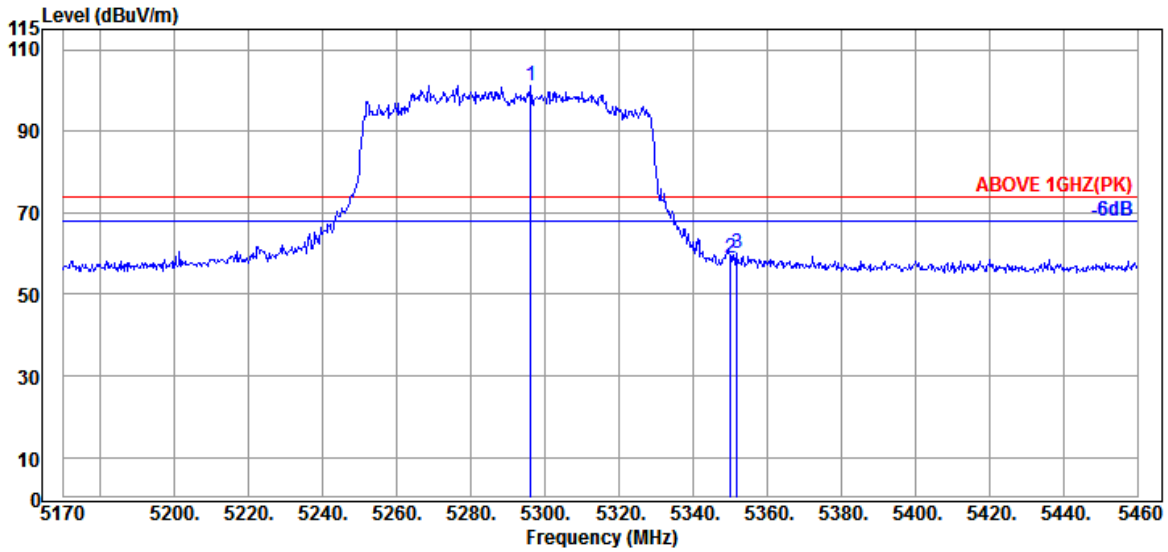

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.150	33.20	9.05	31.63	90.66	101.28	---	---	Peak
5350.090	33.50	9.10	31.63	48.11	59.08	74.00	14.92	Peak
5351.830	33.50	9.10	31.63	49.28	60.25	74.00	13.75	Peak

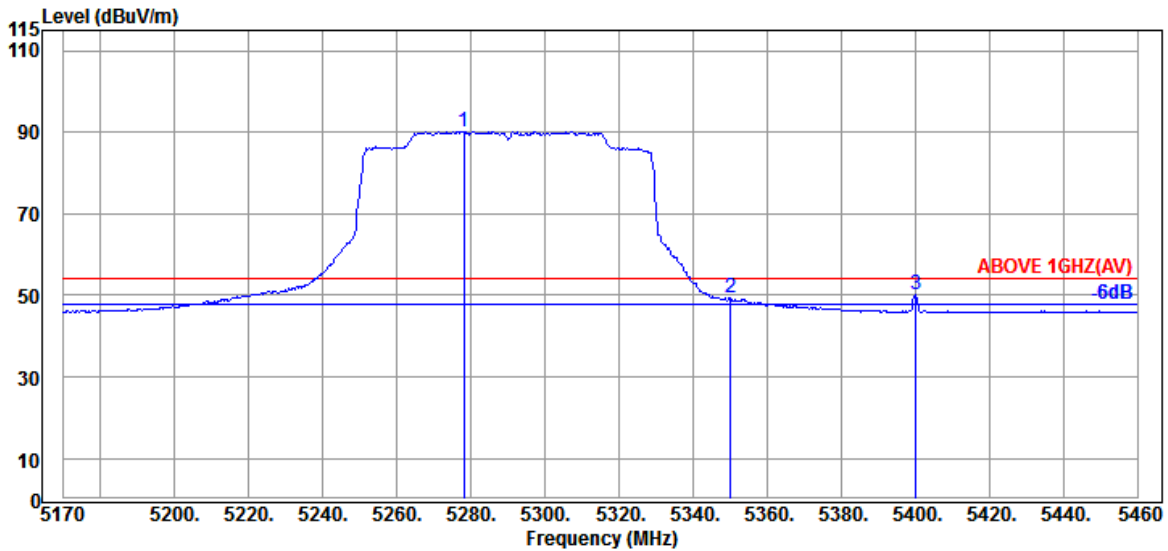


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.170	33.17	9.04	31.63	79.68	90.26	---	---	Average
5350.090	33.50	9.10	31.63	38.24	49.21	54.00	4.79	Average
5400.260	33.70	9.14	31.63	38.94	50.15	54.00	3.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

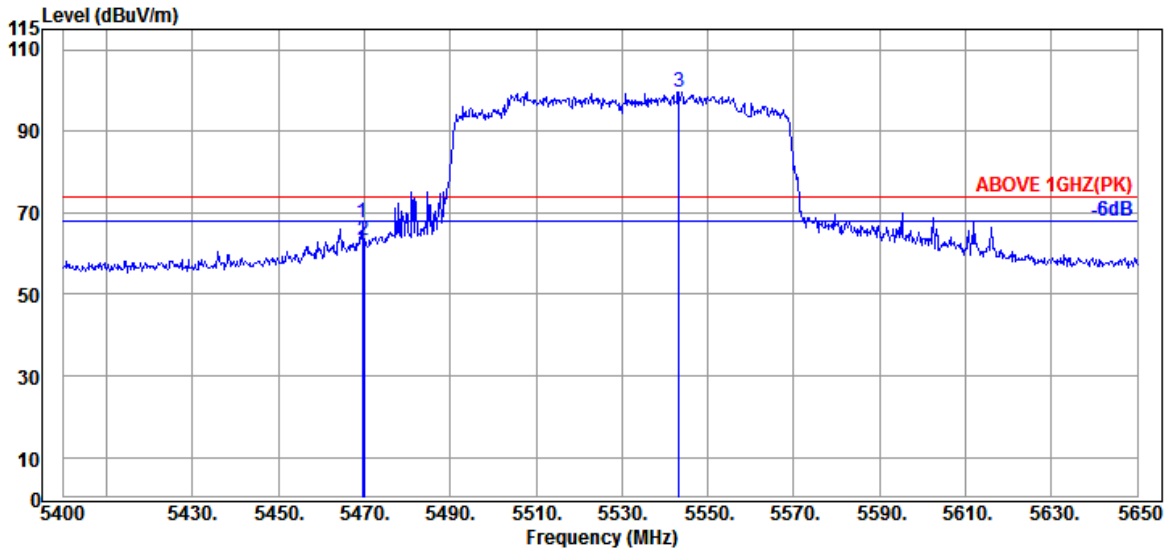

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	33.97	9.20	31.63	56.05	67.59	74.00	6.41	Peak
5470.000	33.97	9.20	31.63	51.86	63.40	74.00	10.60	Peak
@ 5543.250	34.20	9.26	31.66	87.80	99.60	---	---	Peak

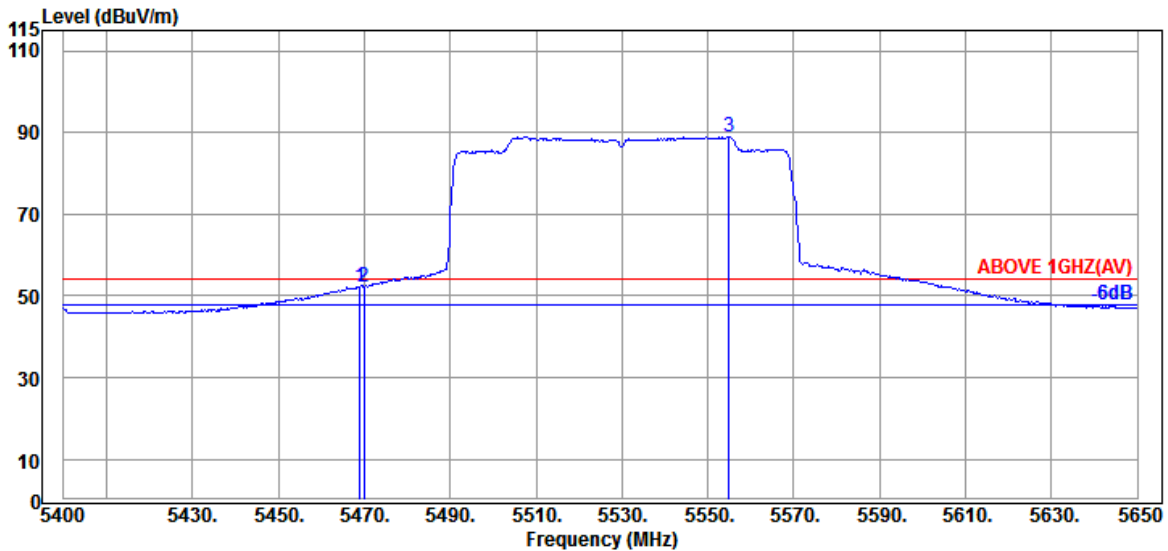


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	40.81	52.35	54.00	1.65	Average
5470.000	33.97	9.20	31.63	40.75	52.29	54.00	1.71	Average
@ 5555.000	34.20	9.27	31.66	77.07	88.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

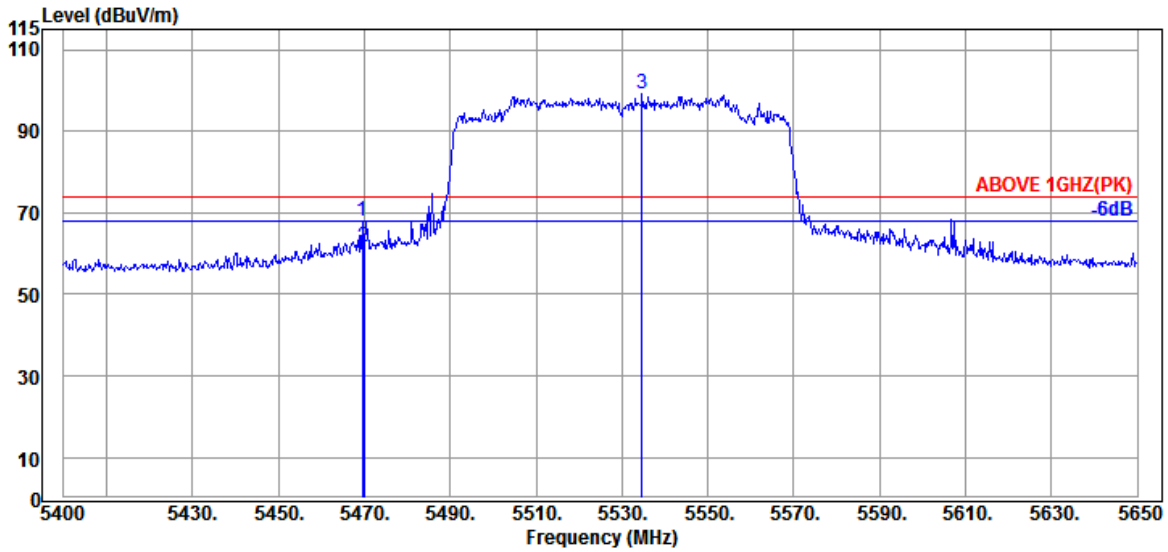

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	33.97	9.20	31.63	56.34	67.88	74.00	6.12	Peak
5470.000	33.97	9.20	31.63	50.19	61.73	74.00	12.27	Peak
@ 5534.750	34.17	9.26	31.65	87.46	99.24	---	---	Peak

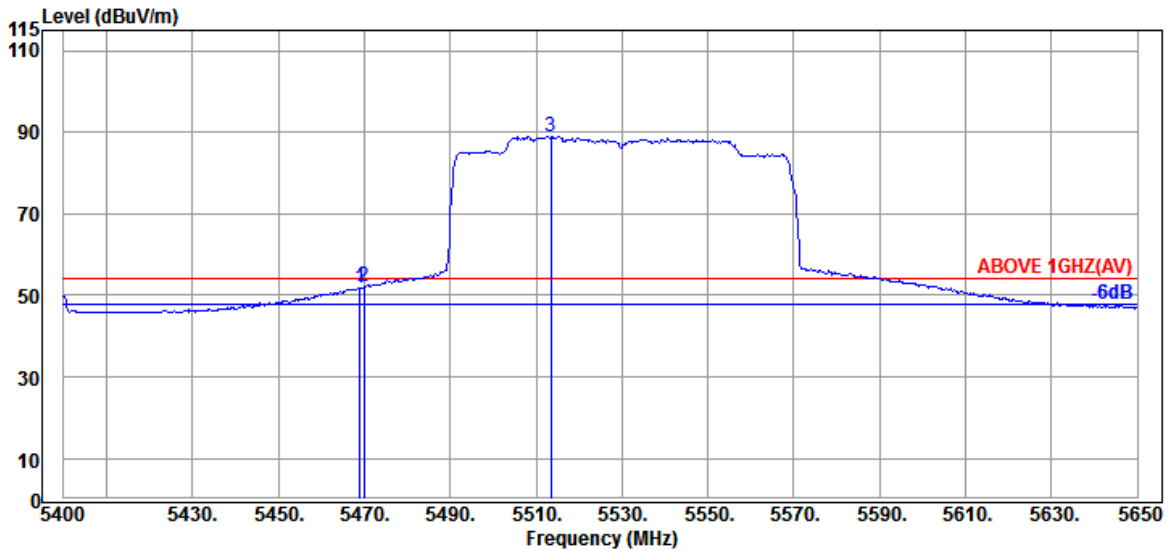


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	40.38	51.92	54.00	2.08	Average
5470.000	33.97	9.20	31.63	40.50	52.04	54.00	1.96	Average
@ 5513.500	34.13	9.24	31.64	77.31	89.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

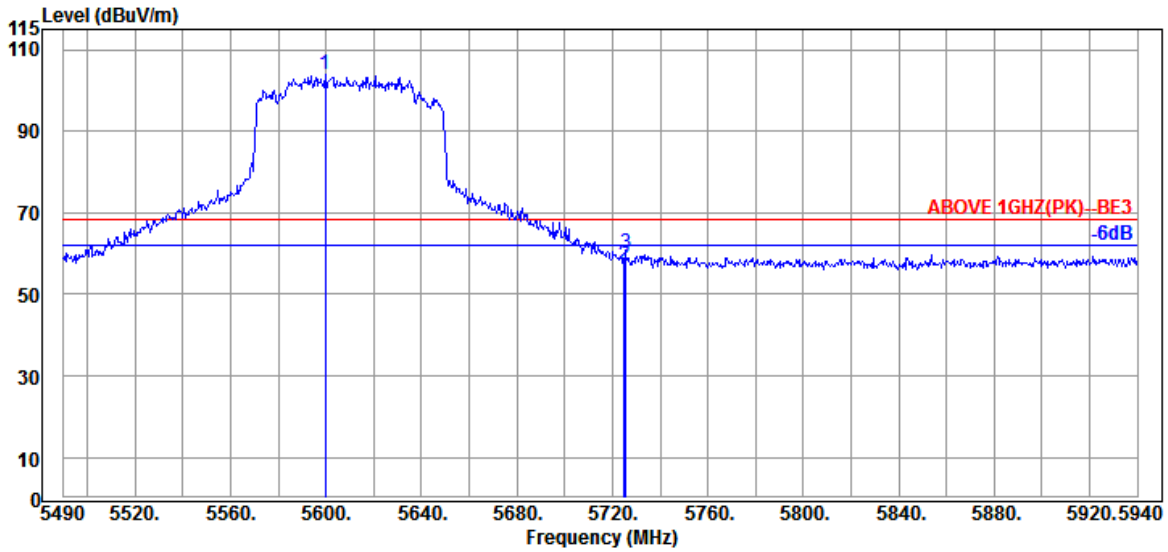

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.800	34.20	9.31	31.68	91.94	103.77	---	---	Peak
5724.900	34.50	9.42	31.74	45.19	57.37	68.20	10.83	Peak
5725.800	34.50	9.42	31.74	47.70	59.88	68.20	8.32	Peak

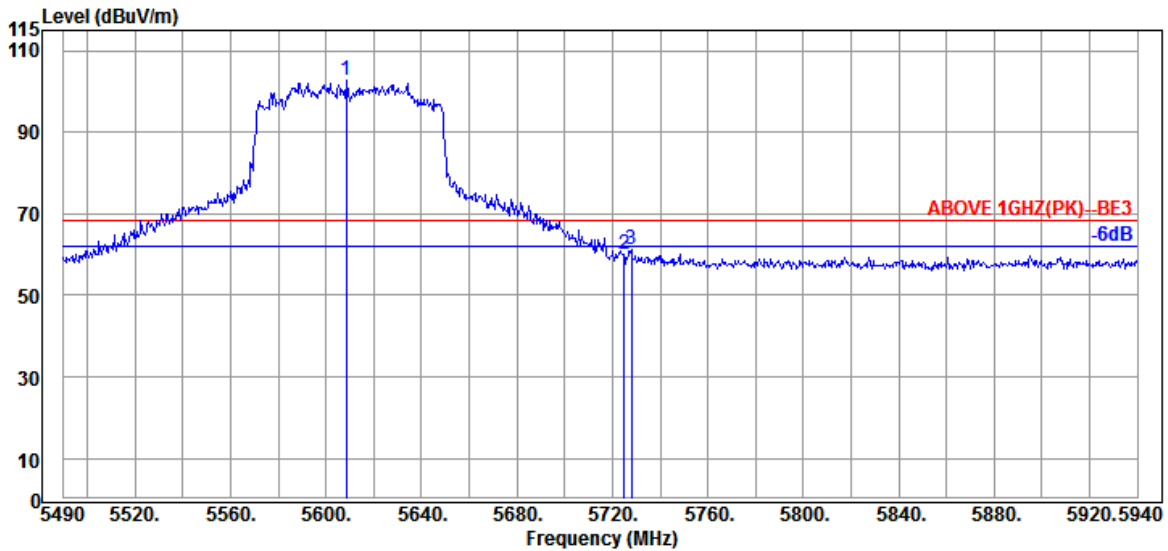

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5608.350	34.23	9.31	31.68	90.83	102.69	---	---	Peak
5724.900	34.50	9.42	31.74	47.71	59.89	68.20	8.31	Peak
5728.050	34.50	9.42	31.75	49.23	61.40	68.20	6.80	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	30.23	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	29.59	47.83	54.00	6.17	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	31.09	49.36	54.00	4.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	28.78	47.05	54.00	6.95	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.80	13.80	33.66	29.63	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.80	13.80	33.66	30.05	48.99	54.00	5.01	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.52	49.10	54.00	4.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.07	48.65	54.00	5.35	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	29.81	49.68	54.00	4.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	29.96	49.83	54.00	4.17	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	28.92	47.16	54.00	6.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	28.78	47.02	54.00	6.98	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	28.86	47.13	54.00	6.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	29.11	47.38	54.00	6.62	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.64	48.31	54.00	5.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.65	48.32	54.00	5.68	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.19	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.06	48.64	54.00	5.36	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.07	14.51	33.59	29.66	49.65	54.00	4.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.07	14.51	33.59	29.10	49.09	54.00	4.91	Peak

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.33	46.55	54.00	7.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.63	46.85	54.00	7.15	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	29.11	47.45	54.00	6.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	29.43	47.77	54.00	6.23	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.41	48.08	54.00	5.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.54	48.21	54.00	5.79	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	28.99	48.53	54.00	5.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	28.98	48.52	54.00	5.48	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.78	49.71	54.00	4.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.36	49.29	54.00	4.71	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.50	47.69	54.00	6.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.67	47.86	54.00	6.14	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	29.30	47.73	54.00	6.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	28.98	47.41	54.00	6.59	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	29.20	48.22	54.00	5.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	28.72	47.74	54.00	6.26	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	29.06	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	29.37	48.83	54.00	5.17	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	29.62	49.42	54.00	4.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	29.88	49.68	54.00	4.32	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	29.44	47.70	54.00	6.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	30.37	48.63	54.00	5.37	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.90	48.79	54.00	5.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.80	48.69	54.00	5.31	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	13.03	33.38	28.86	47.01	54.00	6.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	13.03	33.38	28.79	46.94	54.00	7.06	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	29.06	47.33	54.00	6.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.60	13.13	33.46	30.83	49.10	54.00	4.90	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.63	48.30	54.00	5.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.95	48.62	54.00	5.38	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	28.66	48.24	54.00	5.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.29	48.87	54.00	5.13	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	29.32	49.19	54.00	4.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	29.24	49.11	54.00	4.89	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.86	47.08	54.00	6.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.86	47.08	54.00	6.92	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	28.90	47.24	54.00	6.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	30.00	48.34	54.00	5.66	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	13.70	33.67	29.98	48.81	54.00	5.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	13.70	33.67	29.58	48.41	54.00	5.59	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	29.01	48.55	54.00	5.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	29.33	48.87	54.00	5.13	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.99	49.92	54.00	4.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.01	48.94	54.00	5.06	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.19	47.38	54.00	6.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.56	47.75	54.00	6.25	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	29.42	47.85	54.00	6.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	29.10	47.53	54.00	6.47	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	28.53	47.55	54.00	6.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	28.94	47.96	54.00	6.04	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	28.44	47.90	54.00	6.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	29.57	49.03	54.00	4.97	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	29.15	48.95	54.00	5.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	30.31	50.11	54.00	3.89	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	29.23	47.49	54.00	6.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	30.21	48.47	54.00	5.53	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	28.63	47.52	54.00	6.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.97	48.86	54.00	5.14	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.