

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	6
A.2.3 Emissions in Non-restricted Frequency Bands.....	47
A.3 MAXIMUM POWER SPECTRAL DENSITY	48
A.3.1 Power Spectral Density Result	48
A.3.2 Measurement Plots	51
A.4 MAXIMUM CONDUCTED OUTPUT POWER	89
A.4.1 Conducted Output Power Result	89
A.4.2 Measurement Plots	102
A.5 OCCUPIED BANDWIDTH/26DB BANDWIDTH	124
A.5.1 Occupied Bandwidth/26dB Bandwidth	124
A.5.2 Measurement Plots	128
A.6 UNDESIRABLE EMISSION LIMITS: BAND EDGE / SPURIOUS EMISSION (CONDUCTED)	166
A.6.1 Band Edge Result	166
A.6.2 Measurement Plots	167
A.6.3 Measurement Plots for Spurious Emission.....	182
A.7 IN-BAND EMISSION (CHANNEL MASK)	188
A.8 CONTENTION BASED PROTOCOL	226
A.8.1 Contention-based Protocol.....	226
A.8.2 Measurement Plots	227

A.1 CONDUCTED EMISSION

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

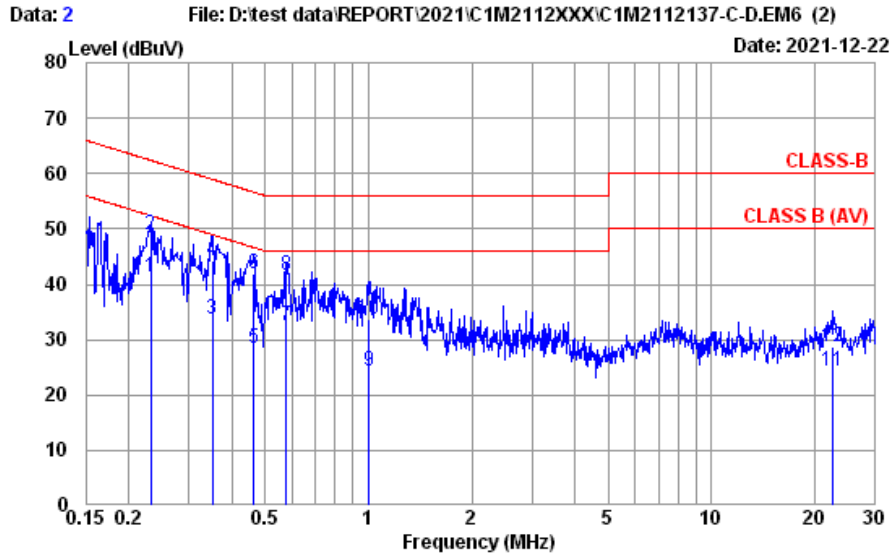

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.232	10.39	0.03	9.85	20.93	41.20	52.39	11.19	Average
2	0.232	10.39	0.03	9.85	28.52	48.79	62.39	13.60	QP
3	0.350	10.37	0.03	9.85	13.56	33.81	48.96	15.15	Average
4	0.350	10.37	0.03	9.85	23.91	44.16	58.96	14.80	QP
5	0.464	10.37	0.03	9.85	8.08	28.33	46.63	18.30	Average
6	0.464	10.37	0.03	9.85	21.60	41.85	56.63	14.78	QP
7	0.576	10.37	0.03	9.85	12.27	32.52	46.00	13.48	Average
8	0.576	10.37	0.03	9.85	21.40	41.65	56.00	14.35	QP
9	1.005	10.38	0.04	9.85	4.05	24.32	46.00	21.68	Average
10	1.005	10.38	0.04	9.85	13.30	33.57	56.00	22.43	QP
11	22.416	11.18	0.20	9.95	2.91	24.24	50.00	25.76	Average
12	22.416	11.18	0.20	9.95	7.36	28.69	60.00	31.31	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

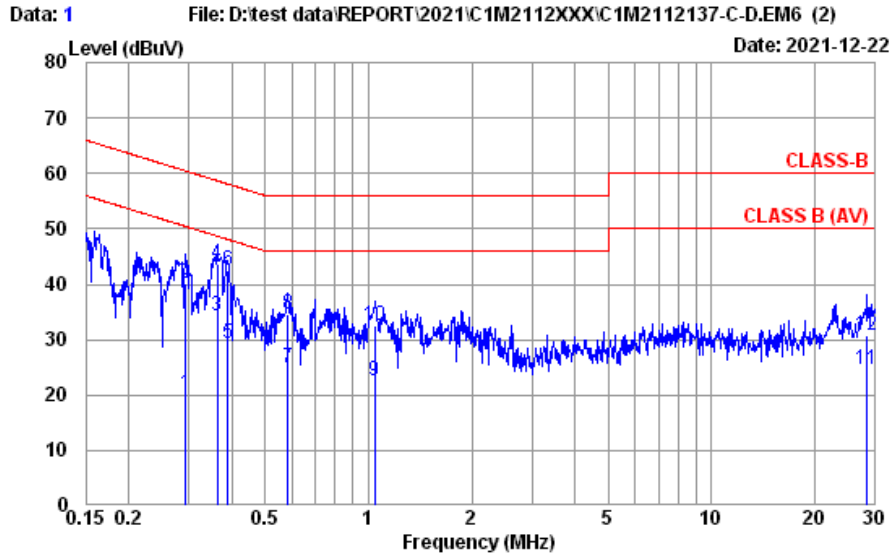

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 17G900	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.292	10.38	0.03	9.85	0.09	20.35	50.46	30.11	Average
2	0.292	10.38	0.03	9.85	19.99	40.25	60.46	20.21	QP
3	0.363	10.37	0.03	9.85	13.91	34.16	48.65	14.49	Average
4	0.363	10.37	0.03	9.85	23.43	43.68	58.65	14.97	QP
5	0.389	10.37	0.03	9.85	8.91	29.16	48.08	18.92	Average
6	0.389	10.37	0.03	9.85	22.27	42.52	58.08	15.56	QP
7	0.582	10.37	0.03	9.85	4.76	25.01	46.00	20.99	Average
8	0.582	10.37	0.03	9.85	14.44	34.69	56.00	21.31	QP
9	1.043	10.38	0.04	9.85	2.35	22.62	46.00	23.38	Average
10	1.043	10.38	0.04	9.85	12.35	32.62	56.00	23.38	QP
11	28.452	10.86	0.23	10.00	3.65	24.74	50.00	25.26	Average
12	28.452	10.86	0.23	10.00	9.80	30.89	60.00	29.11	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/01/17	Temp./Hum.	21°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sam Chang

A.2.1 Emissions within Restricted Frequency Bands

A.1.1.1 Frequency 9kHz~30MHz


The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303


A.1.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT160	U-NII Band	5
		Frequency	TX 6345MHz

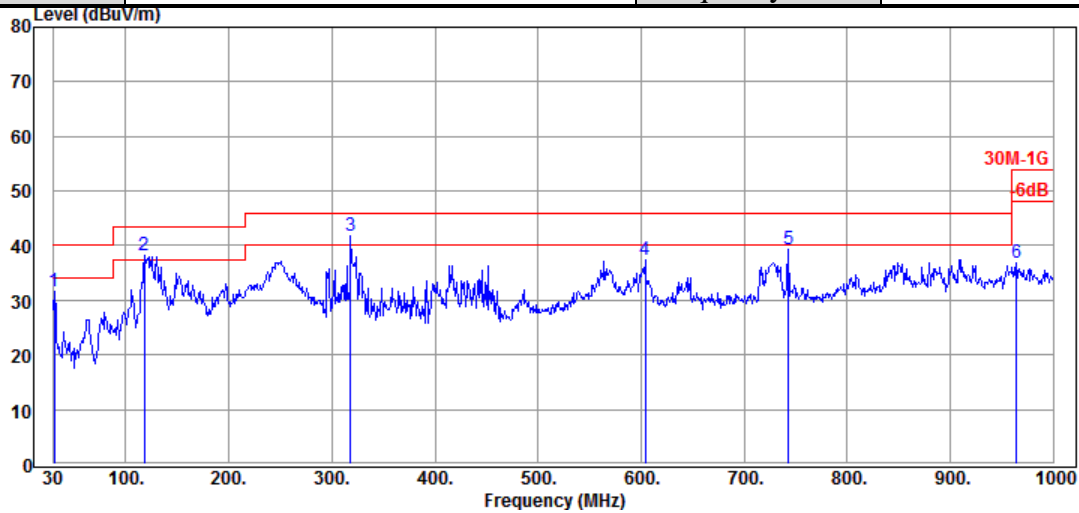

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	39.49	31.52	40.00	8.48	Peak
118.270	17.87	2.50	32.32	50.14	38.19	43.50	5.31	Peak
318.090	19.52	4.55	32.25	49.85	41.67	46.00	4.33	Peak
604.240	24.32	6.79	32.32	38.48	37.27	46.00	8.73	Peak
742.950	25.30	7.51	32.01	38.49	39.29	46.00	6.71	Peak
964.110	26.85	8.79	30.89	31.96	36.71	54.00	17.29	Peak

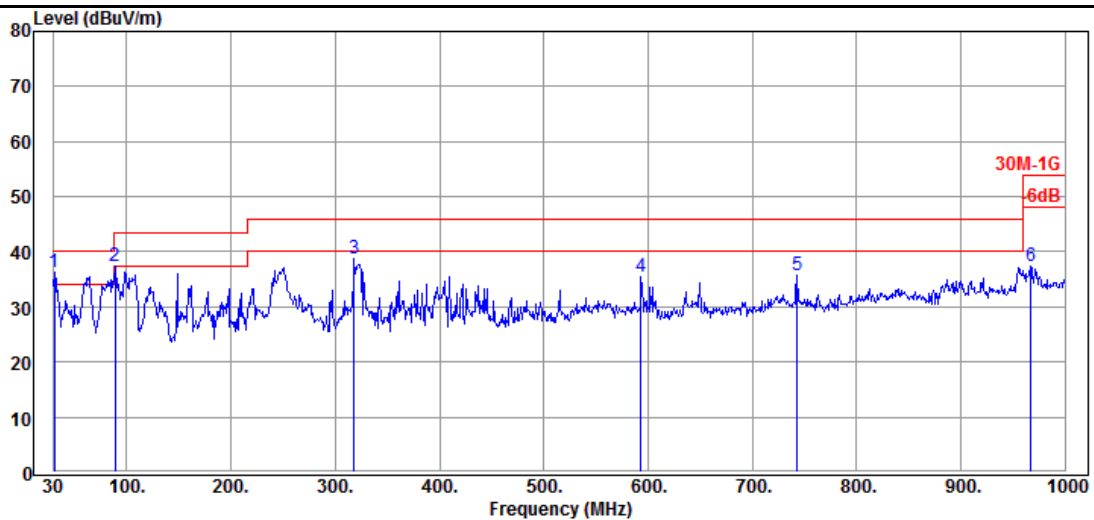

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	44.34	36.37	40.00	3.63	Peak
89.170	14.60	2.14	32.36	53.01	37.39	43.50	6.11	Peak
318.090	19.52	4.55	32.25	47.02	38.84	46.00	7.16	Peak
593.570	24.23	6.75	32.31	36.89	35.56	46.00	10.44	Peak
742.950	25.30	7.51	32.01	34.89	35.69	46.00	10.31	Peak
967.020	26.85	8.79	30.89	32.67	37.42	54.00	16.58	Peak

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.


- OFDM Modulation

Mode	802.11a	U-NII Band	5
		Frequency	TX 5955MHz

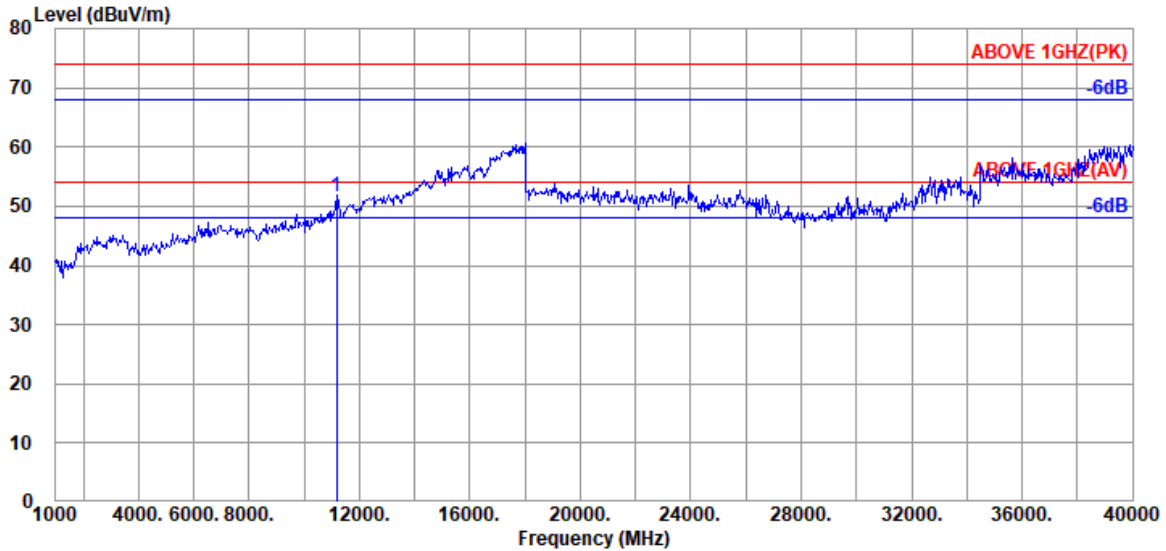

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	31.35	51.65	54.00	2.35	Peak

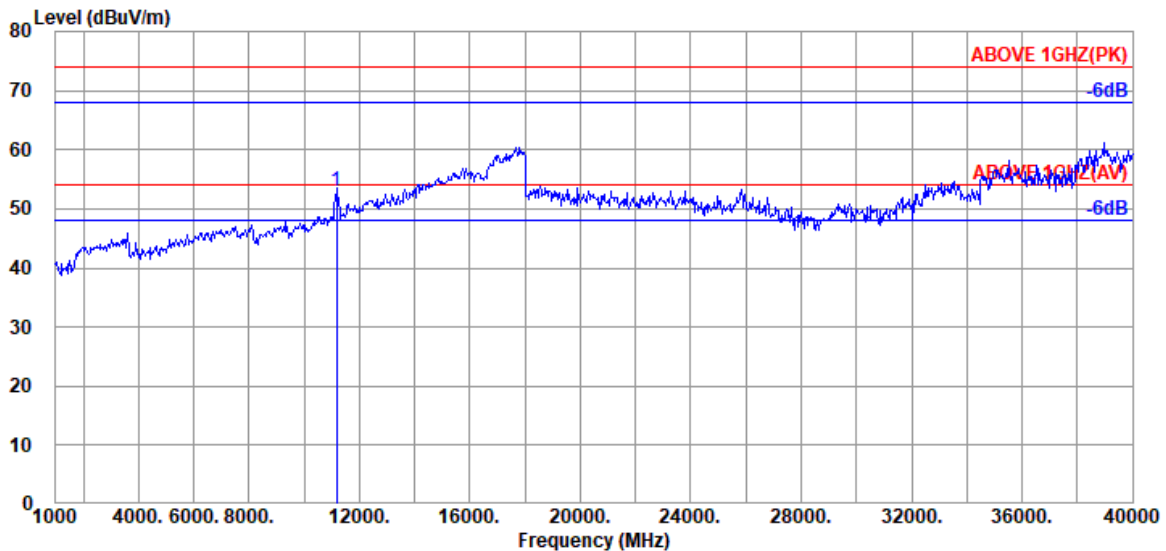

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	32.55	52.85	54.00	1.15	Peak

Mode	802.11a	U-NII Band	6
		Frequency	TX 6475MHz

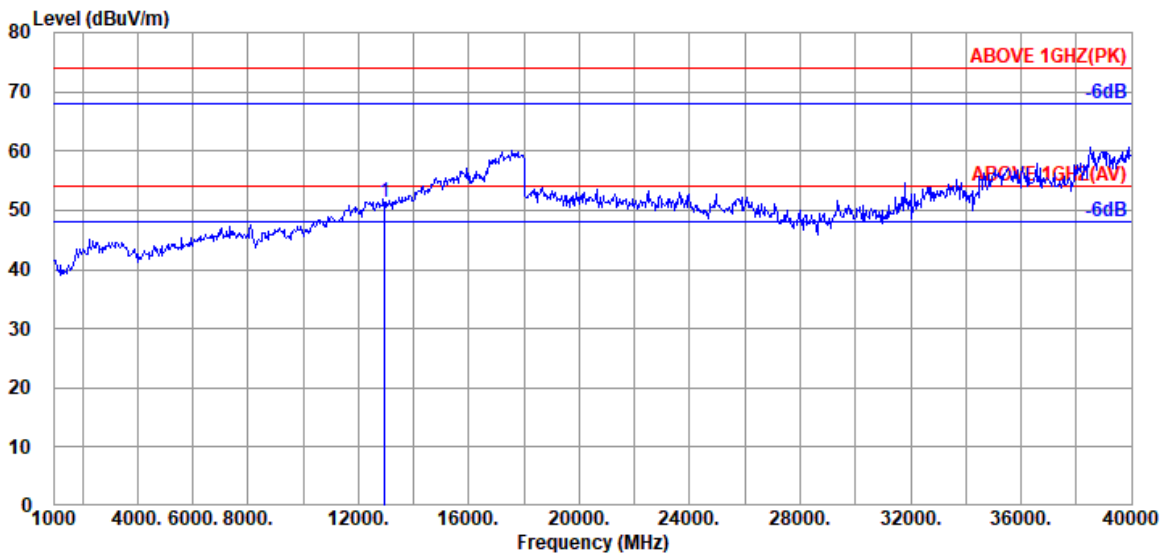

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	29.09	51.39	54.00	2.61	Peak

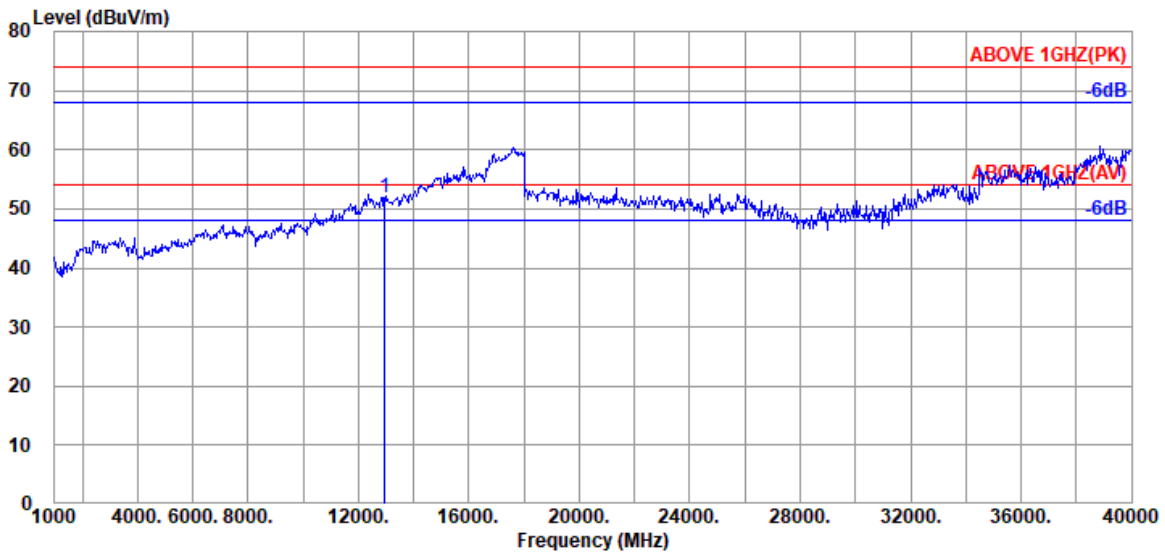


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	29.66	51.96	54.00	2.04	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11a	U-NII Band	7
		Frequency	TX 6535MHz

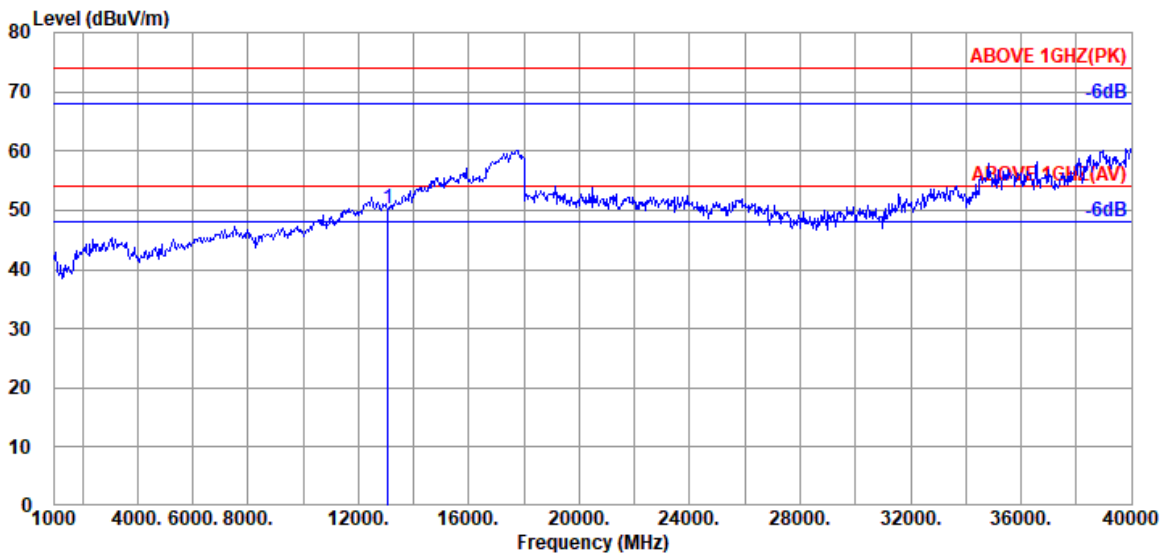

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.87	15.93	33.22	27.58	50.16	54.00	3.84	Peak

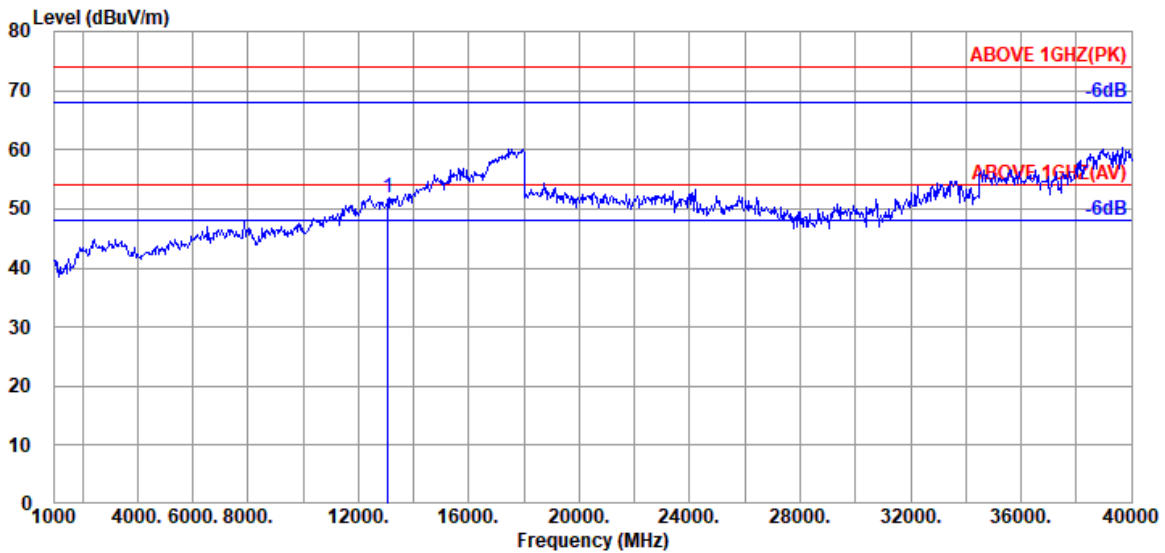

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.87	15.93	33.22	29.20	51.78	54.00	2.22	Peak

Mode	802.11a	U-NII Band	8
		Frequency	TX 6875MHz

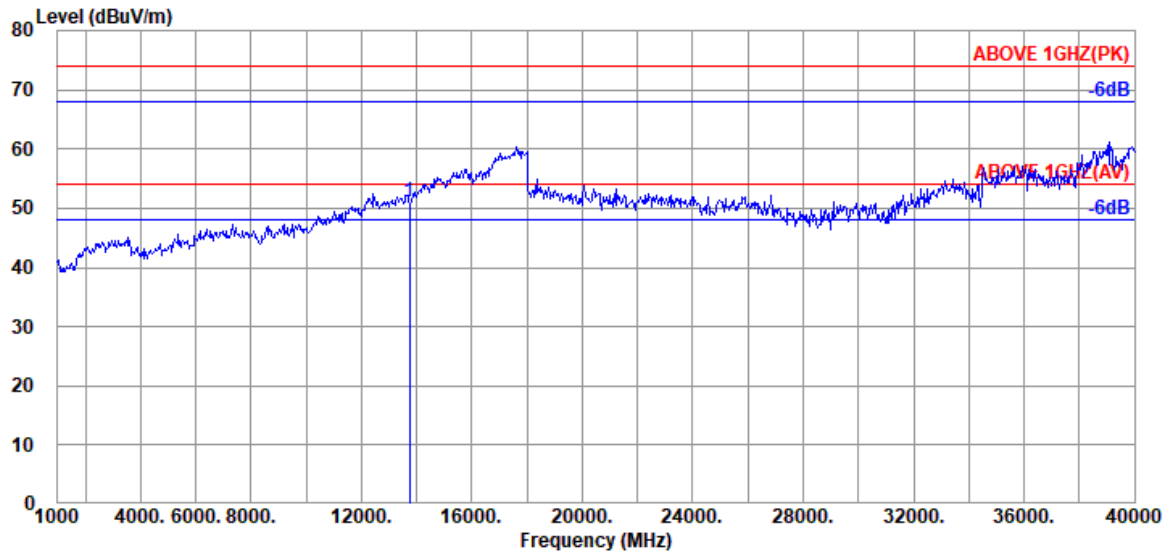

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	40.70	16.46	33.17	26.98	50.97	54.00	3.03	Peak

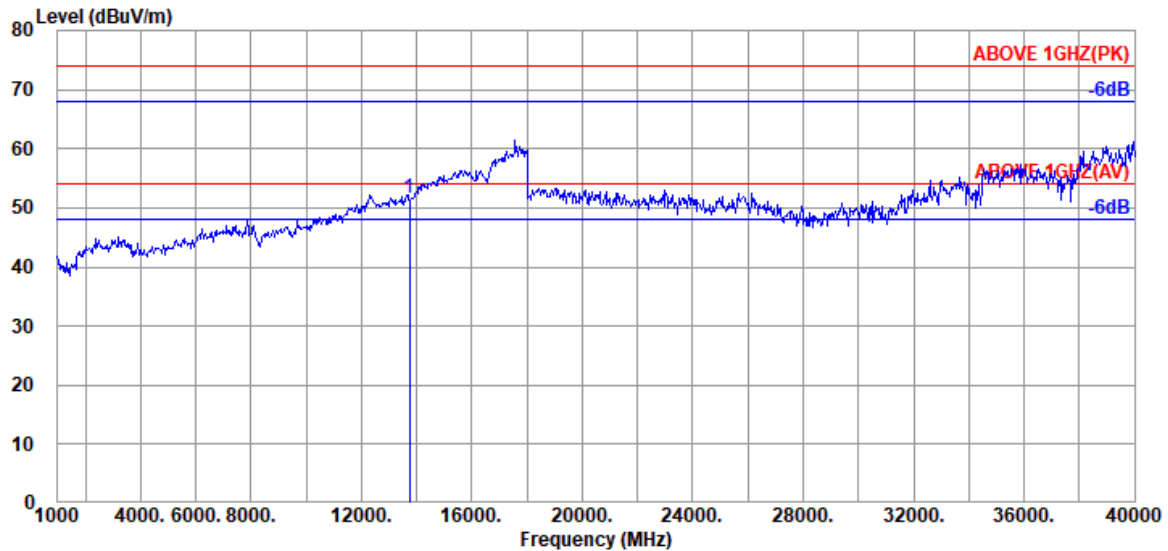

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	40.70	16.46	33.17	27.49	51.48	54.00	2.52	Peak

Mode	802.11n-HT20	U-NII Band	5
		Frequency	TX 5955MHz

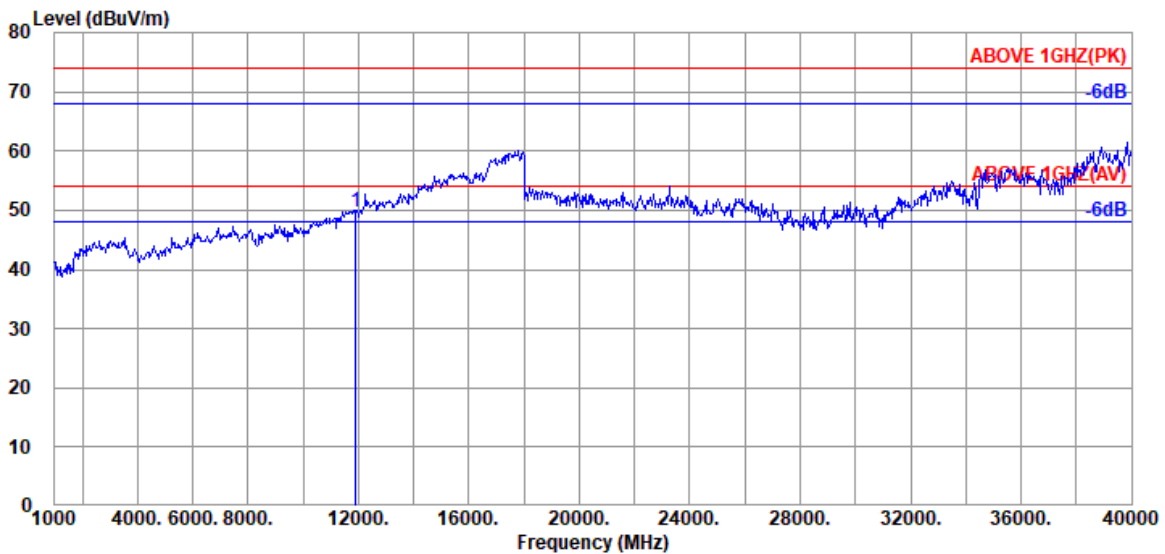

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	29.44	49.74	54.00	4.26	Peak

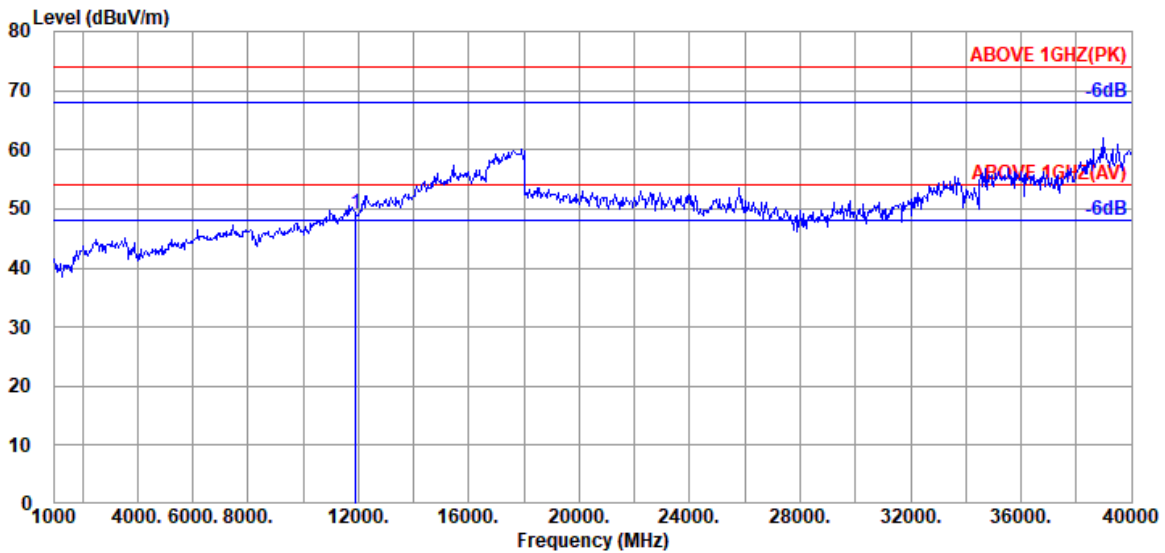

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	28.90	49.20	54.00	4.80	Peak

Mode	802.11n-HT20	U-NII Band	6
		Frequency	TX 6475MHz

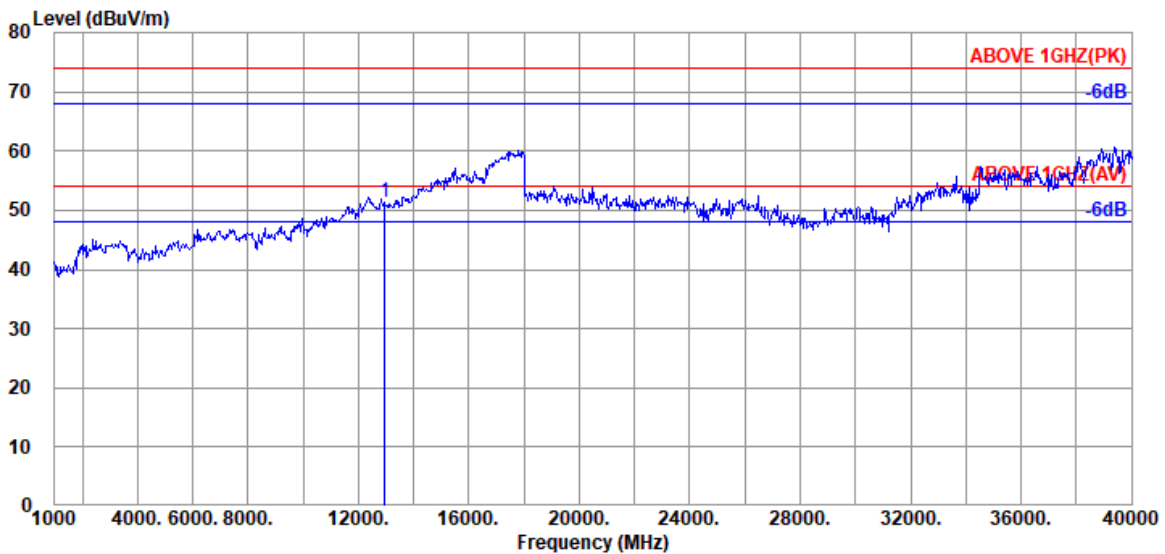

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	28.99	51.29	54.00	2.71	Peak

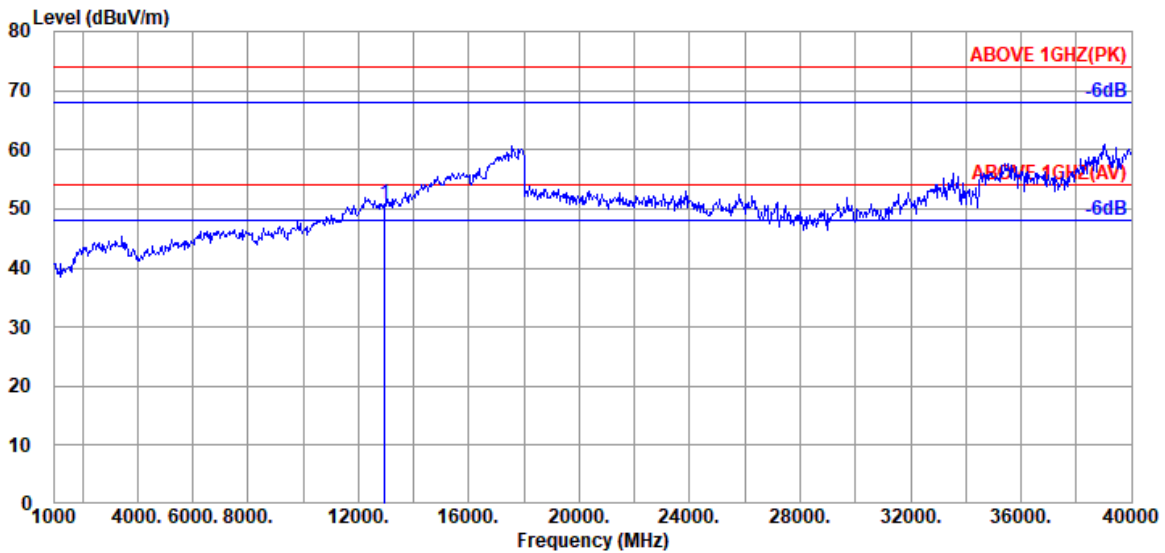


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	28.51	50.81	54.00	3.19	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	7
		Frequency	TX 6855MHz

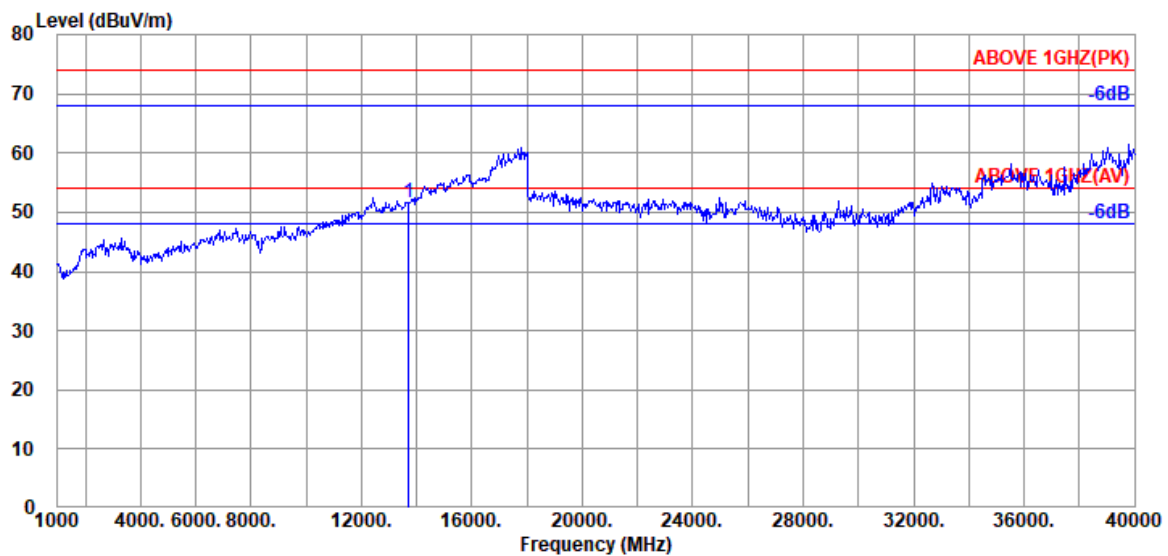

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13710.000	40.60	16.44	33.16	27.76	51.64	54.00	2.36	Peak

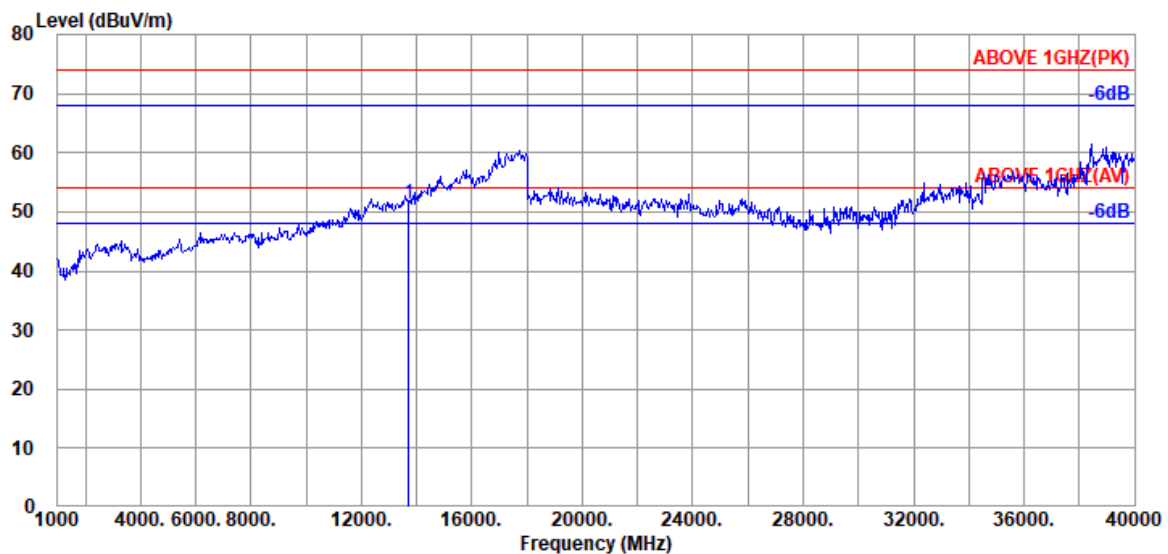

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13710.000	40.60	16.44	33.16	27.55	51.43	54.00	2.57	Peak

Mode	802.11n-HT20	U-NII Band	8
		Frequency	TX 6995MHz

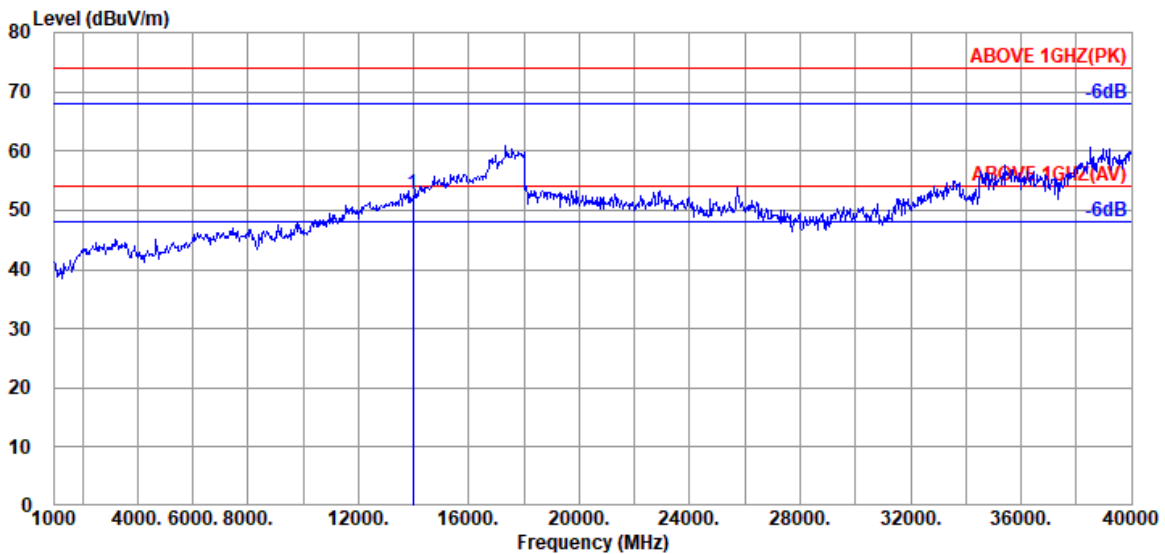

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13990.000	40.90	16.65	33.17	28.19	52.57	54.00	1.43	Peak

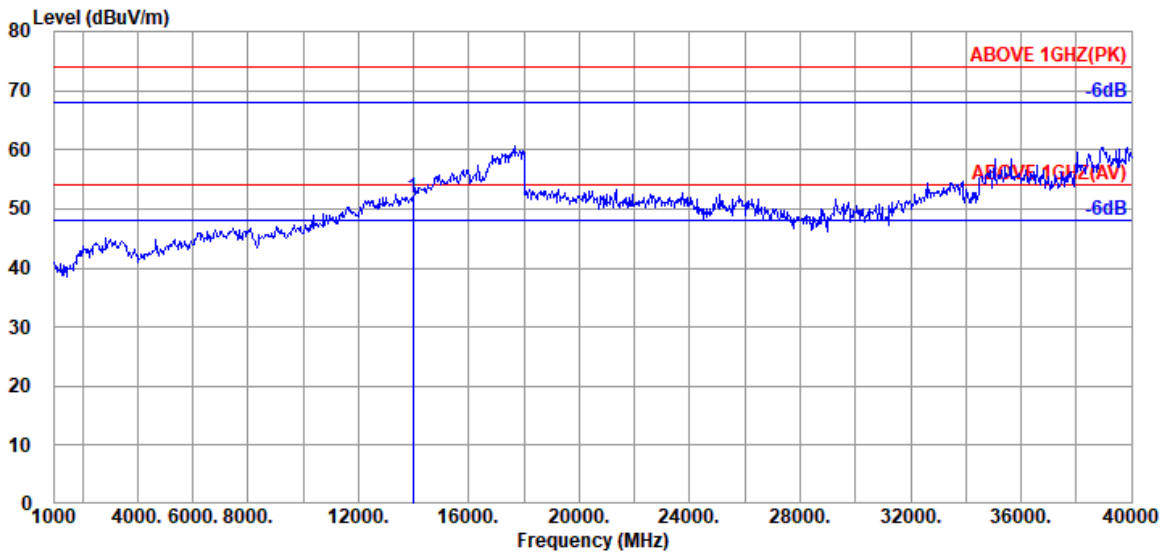

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13990.000	40.90	16.65	33.17	27.37	51.75	54.00	2.25	Peak

Mode	802.11n-HT40	U-NII Band	5
		Frequency	TX 5965MHz

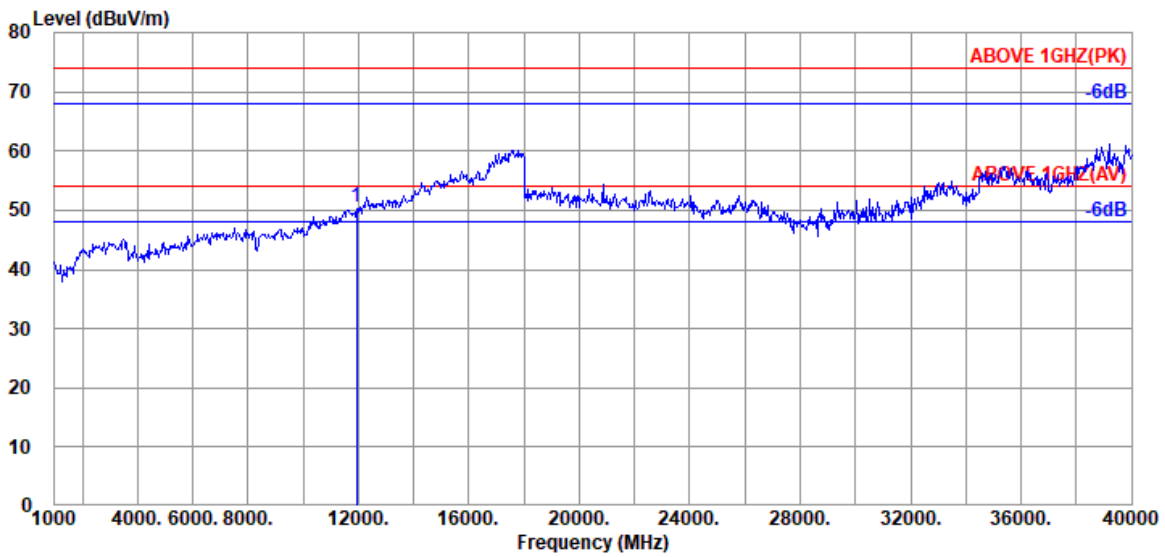

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.87	14.94	33.51	30.22	50.52	54.00	3.48	Peak

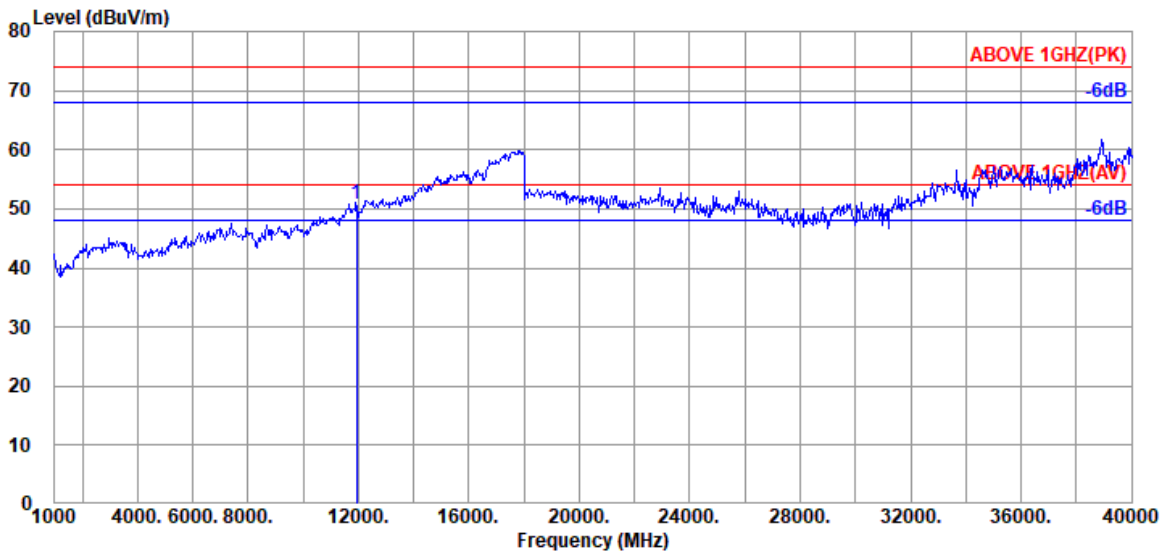


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.87	14.94	33.51	30.46	50.76	54.00	3.24	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	6
		Frequency	TX 6485MHz

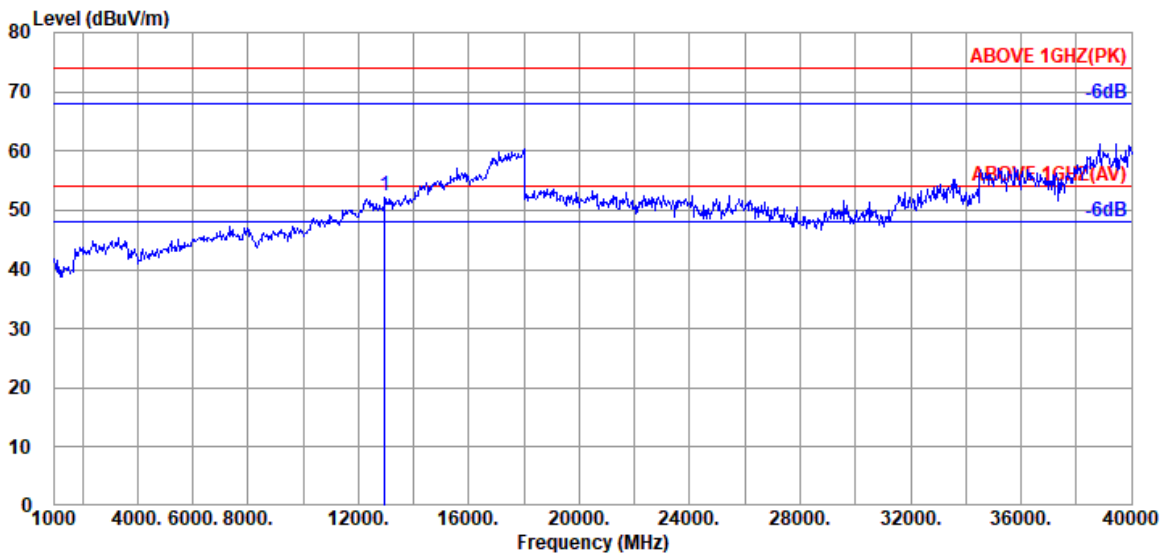

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.80	15.85	33.24	30.00	52.41	54.00	1.59	Peak

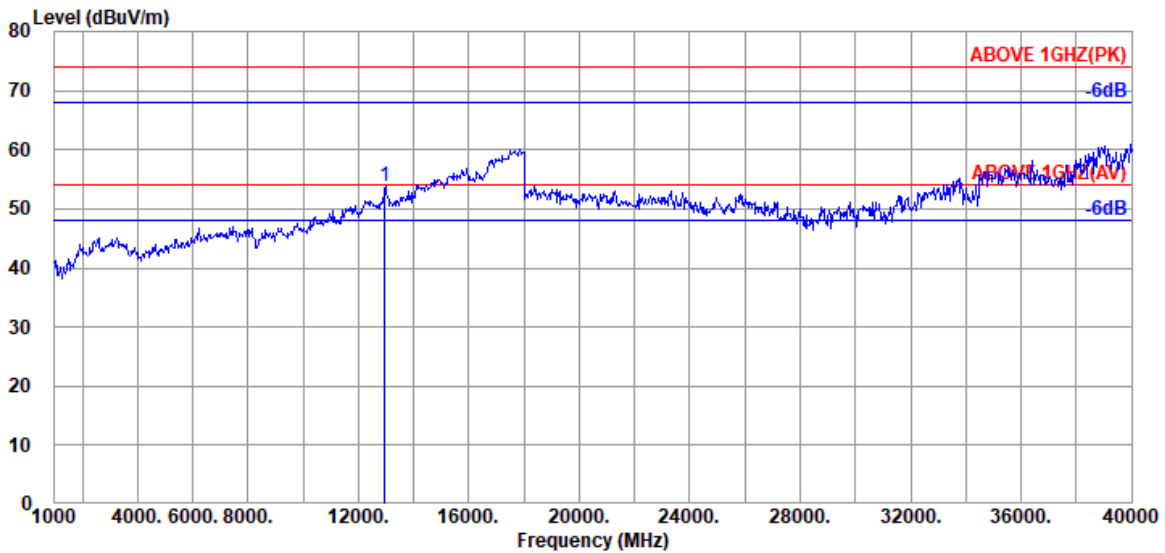

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.80	15.85	33.24	31.38	53.79	54.00	0.21	Peak

Mode	802.11n-HT40	U-NII Band	7
		Frequency	TX 6525MHz

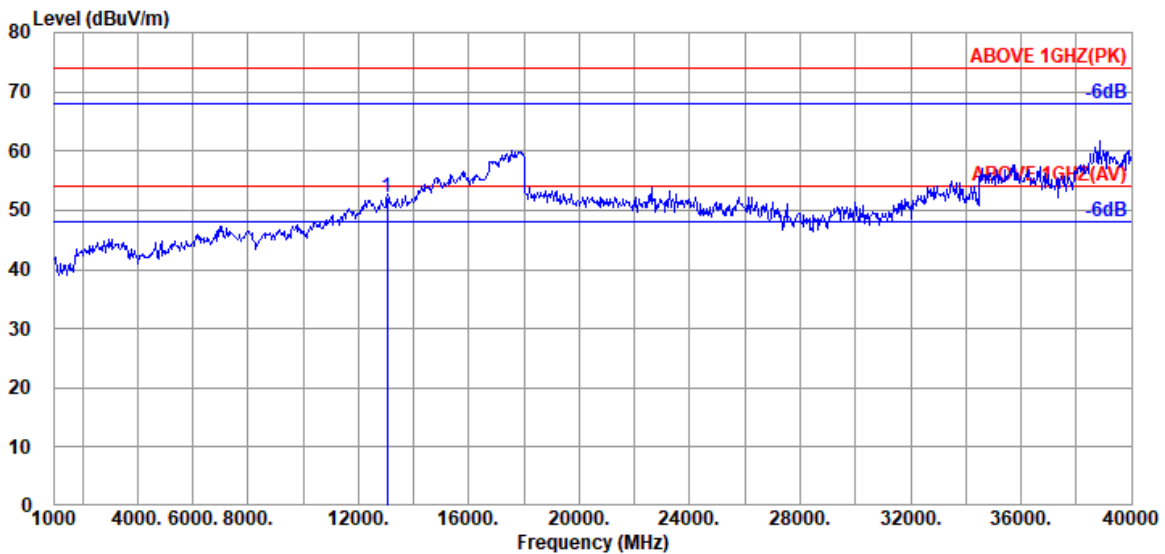

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.87	15.92	33.22	29.57	52.14	54.00	1.86	Peak

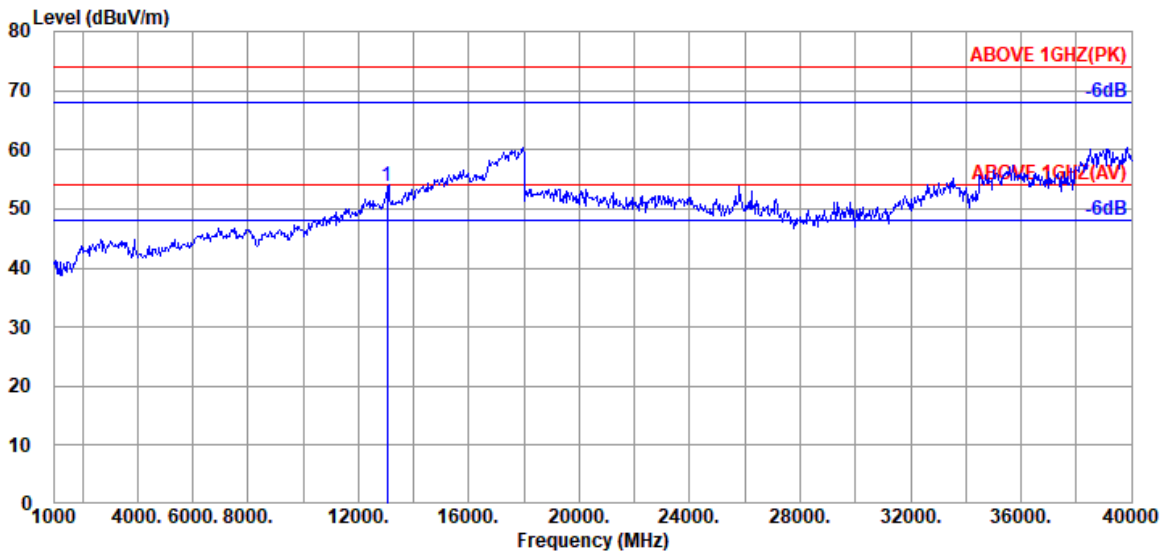


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.87	15.92	33.22	31.33	53.90	54.00	0.10	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	8
		Frequency	TX 7005MHz

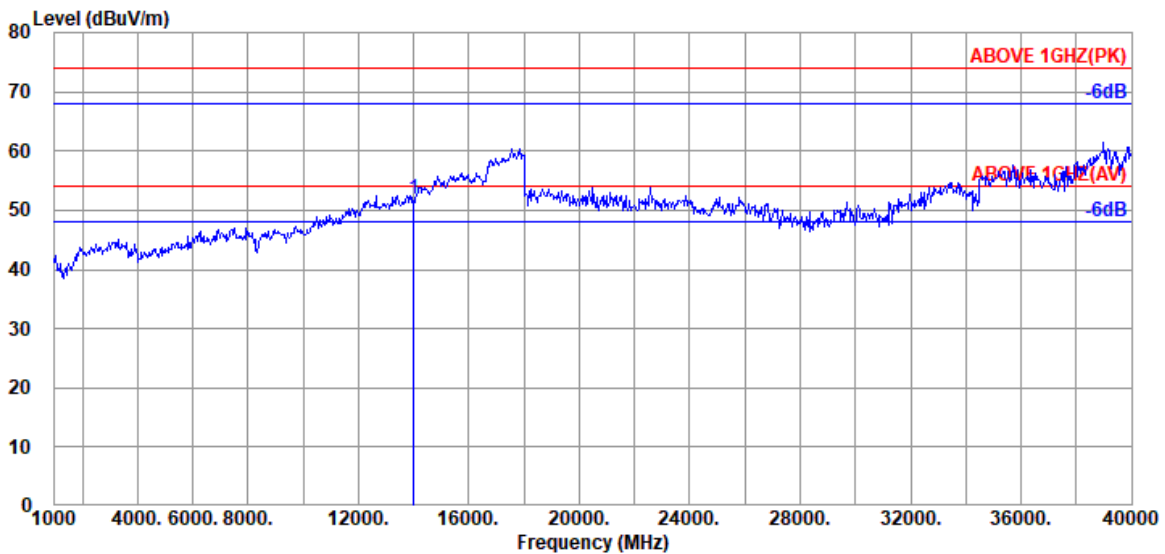

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	40.90	16.66	33.17	27.62	52.01	54.00	1.99	Peak

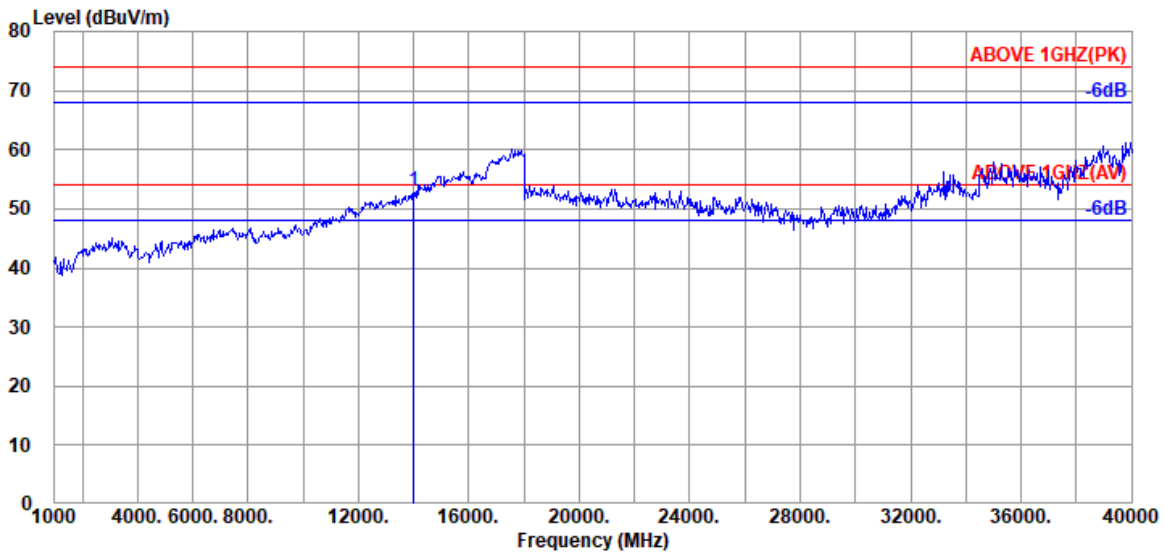

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	40.90	16.66	33.17	28.65	53.04	54.00	0.96	Peak

Mode	802.11ac-VHT80	U-NII Band	5
		Frequency	TX 5985MHz

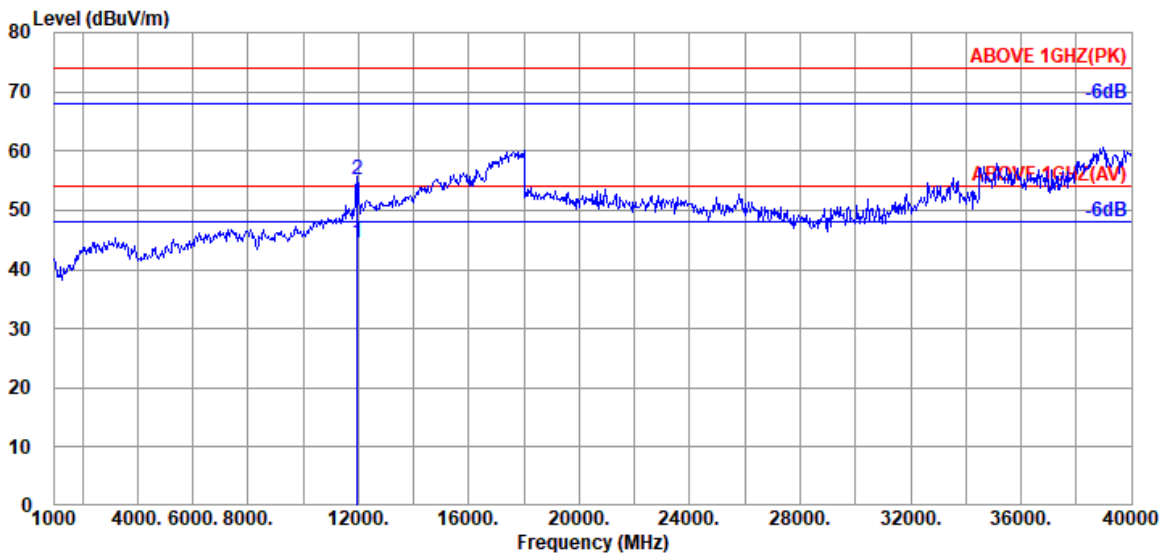

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.83	14.99	33.50	24.10	44.42	54.00	9.58	Average
11970.000	38.83	14.99	33.50	34.96	55.28	74.00	18.72	Peak

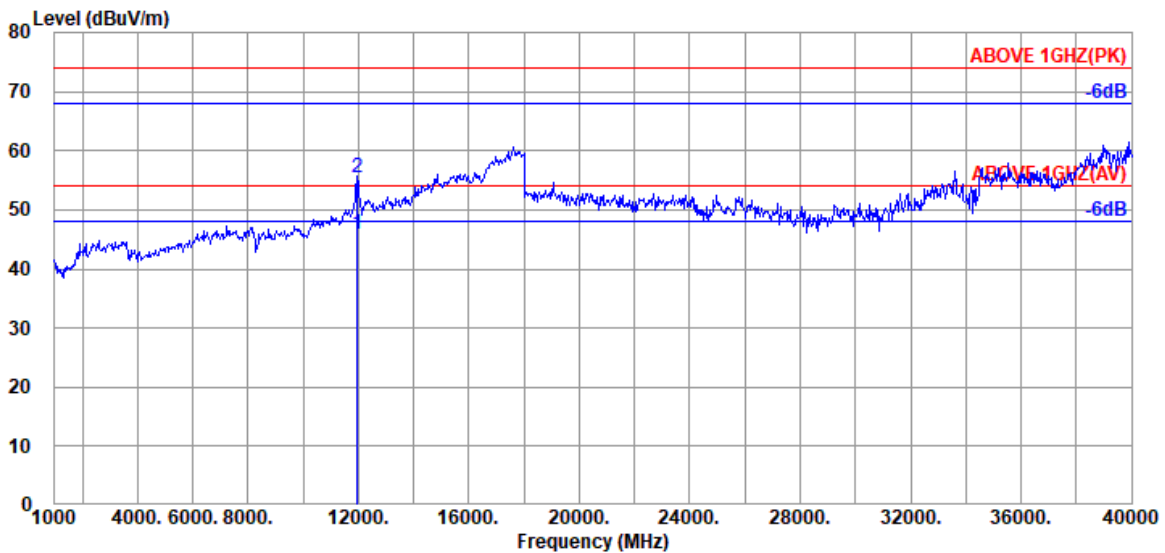


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.83	14.99	33.50	25.54	45.86	54.00	8.14	Average
11970.000	38.83	14.99	33.50	34.98	55.30	74.00	18.70	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	6
		Frequency	TX 6545MHz

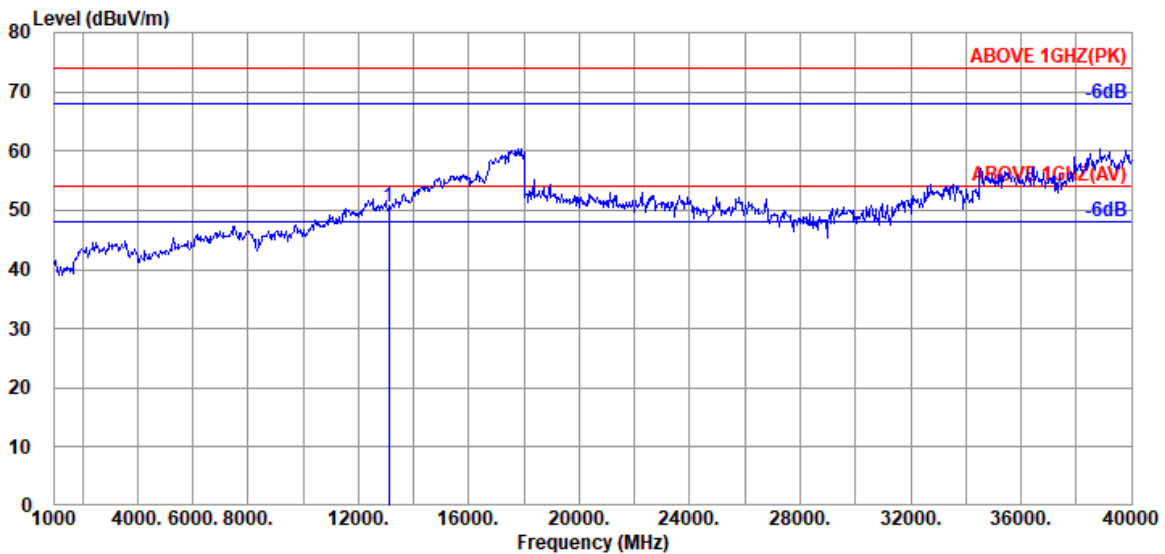

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.90	15.95	33.22	27.86	50.49	54.00	3.51	Peak

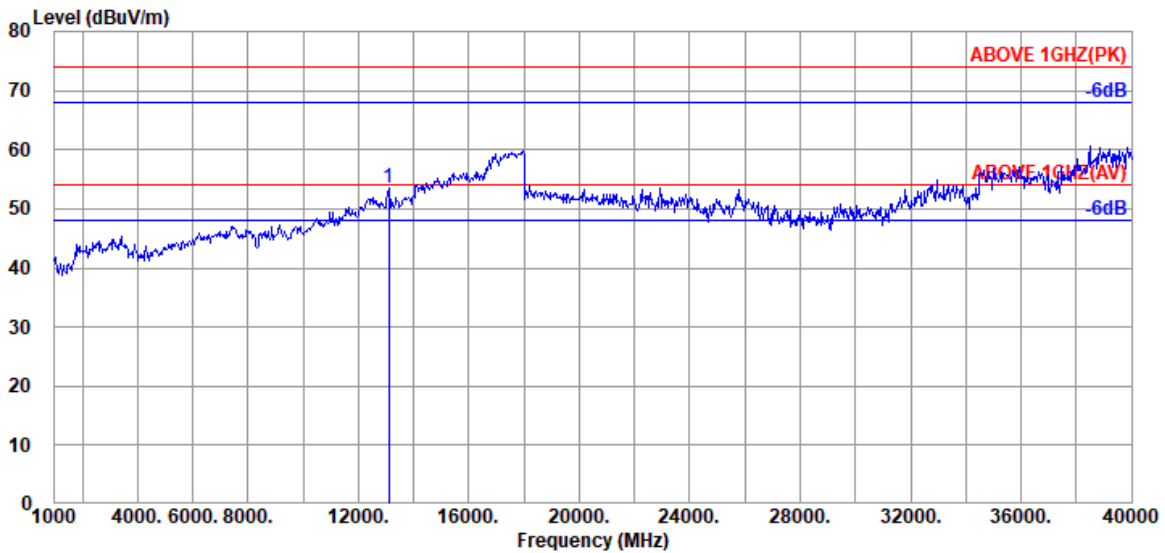


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13100.000	39.90	15.96	33.22	30.79	53.43	54.00	0.57	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	7
		Frequency	TX 6625MHz

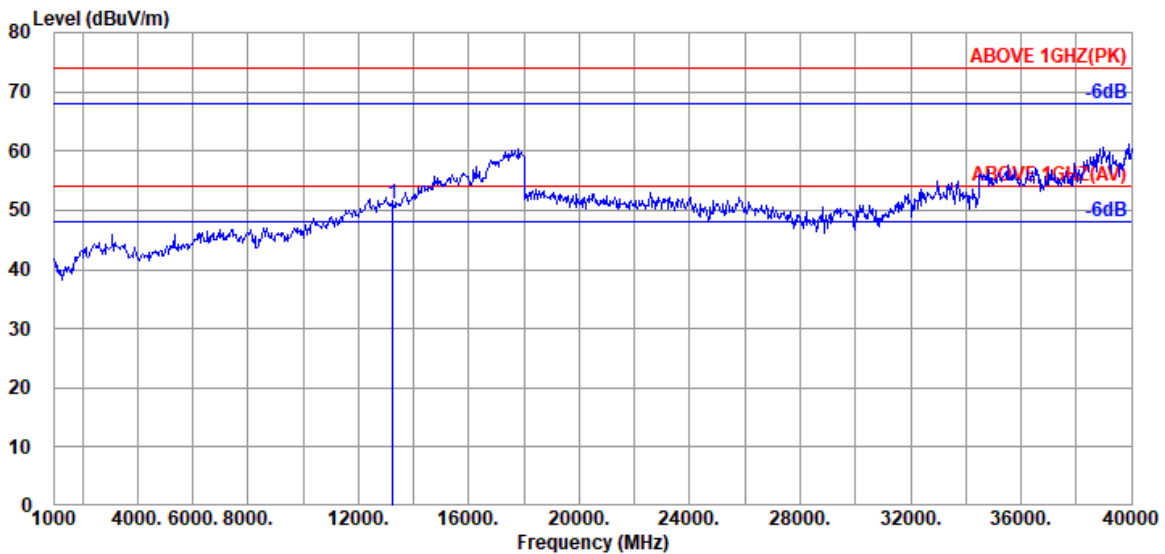

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.15	16.08	33.20	28.16	51.19	54.00	2.81	Peak

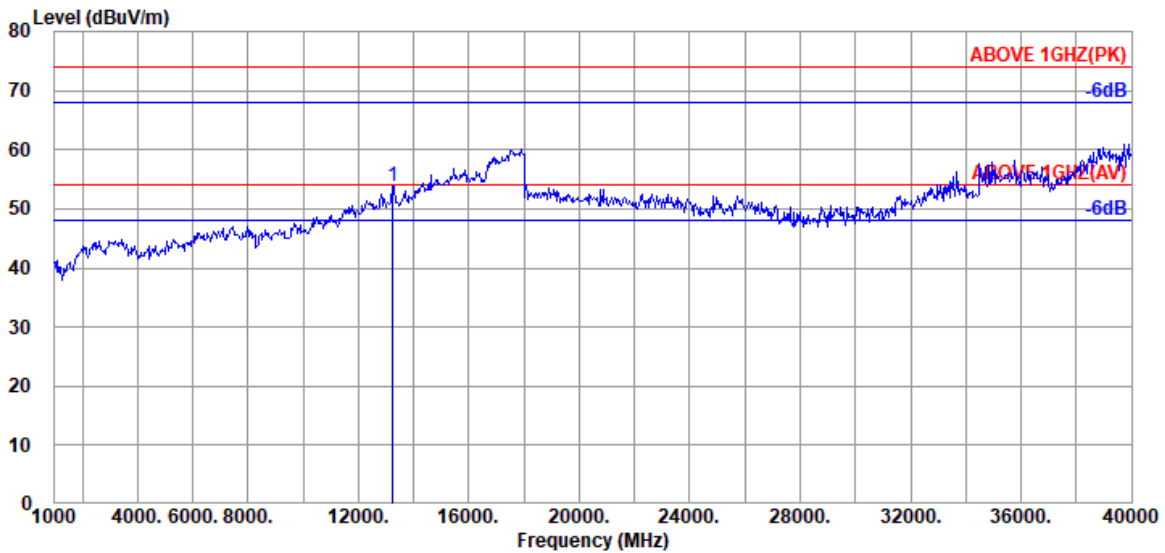


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.15	16.08	33.20	30.85	53.88	54.00	0.12	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	8
		Frequency	TX 6945MHz

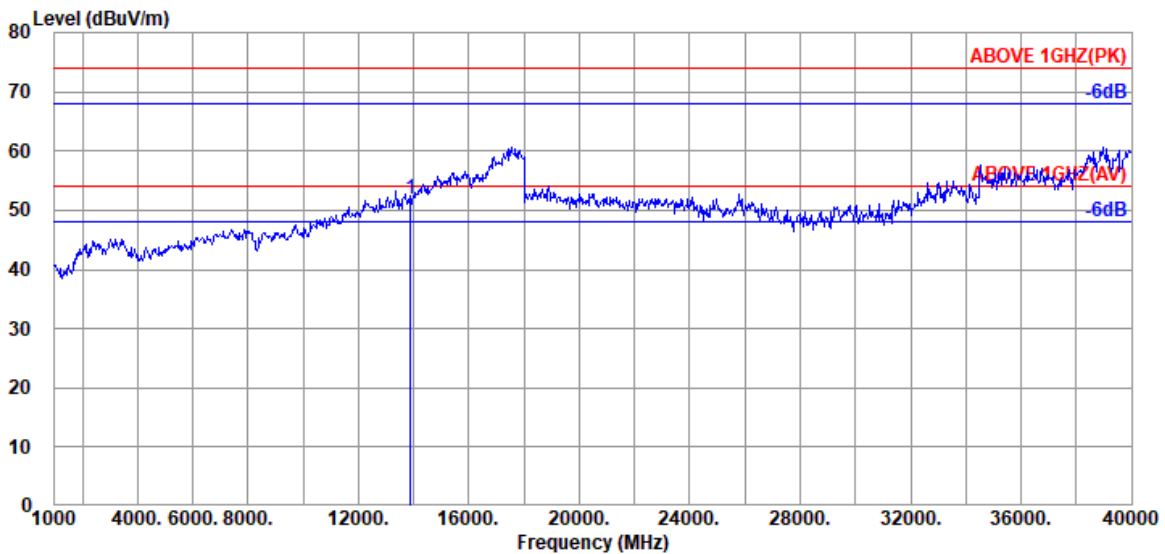

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	40.80	16.57	33.17	27.79	51.99	54.00	2.01	Peak

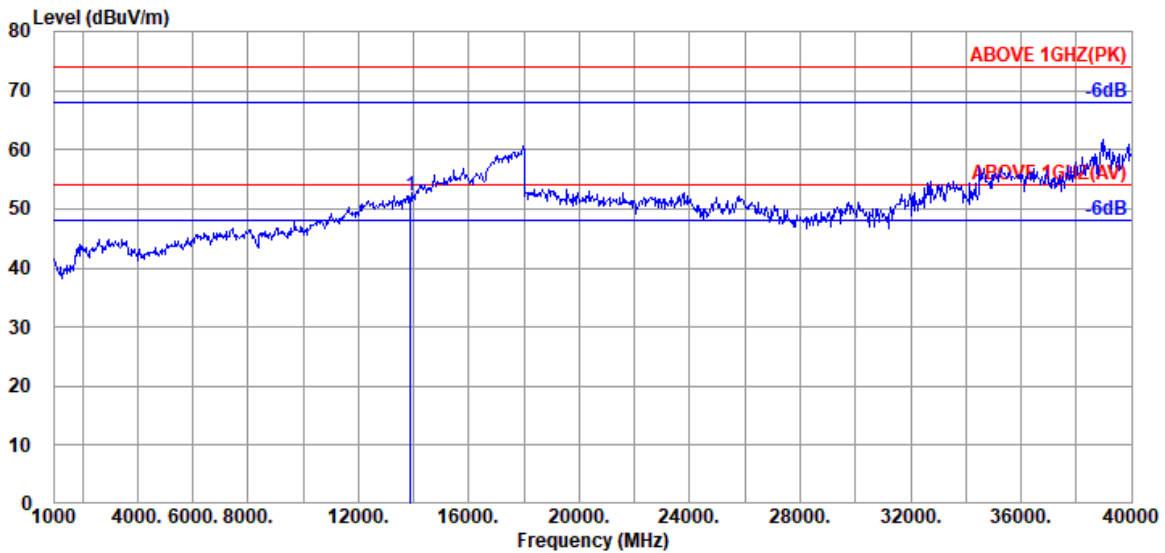


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	40.80	16.57	33.17	27.90	52.10	54.00	1.90	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	5
		Frequency	TX 6345MHz

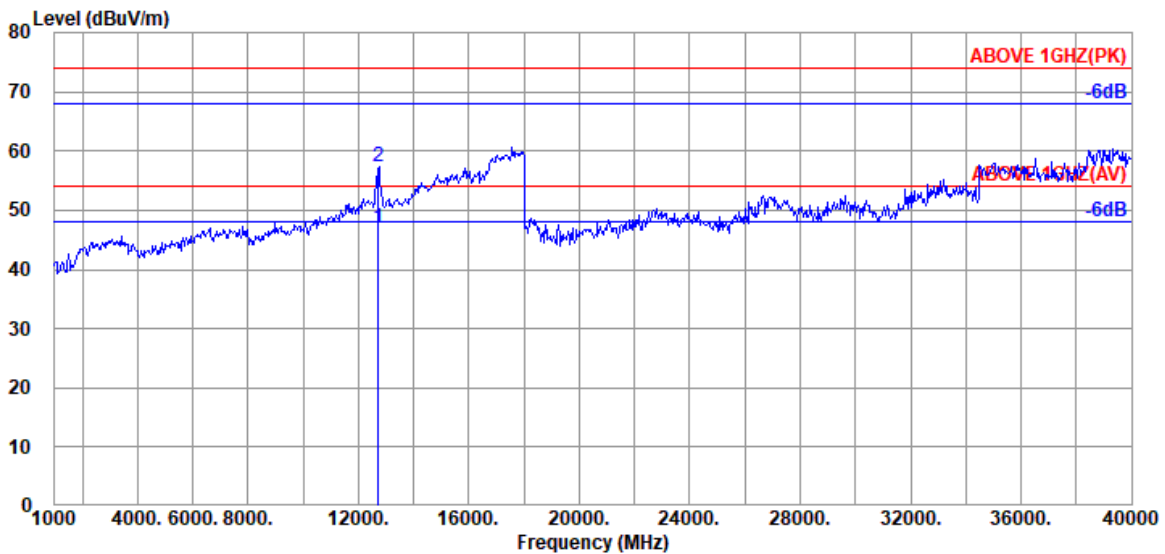

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
12720.000	39.43	15.64	33.31	25.24	47.00	54.00	7.00	Average
12720.000	39.43	15.64	33.31	35.49	57.25	74.00	16.75	Peak

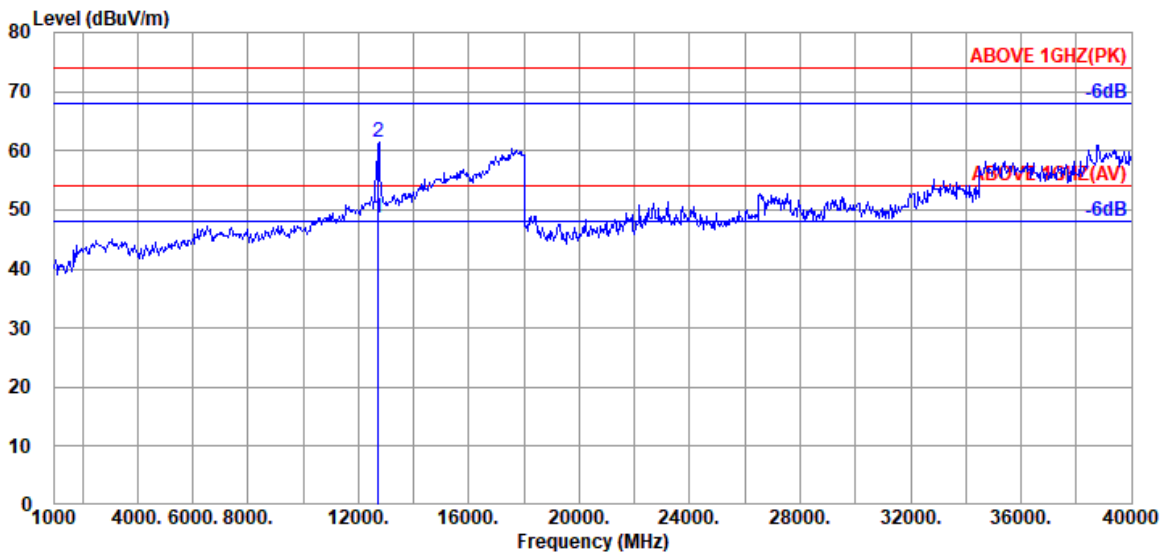


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
12710.000	39.43	15.64	33.31	26.86	48.62	54.00	5.38	Average
12710.000	39.43	15.64	33.31	39.69	61.45	74.00	12.55	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	6
		Frequency	TX 6505MHz

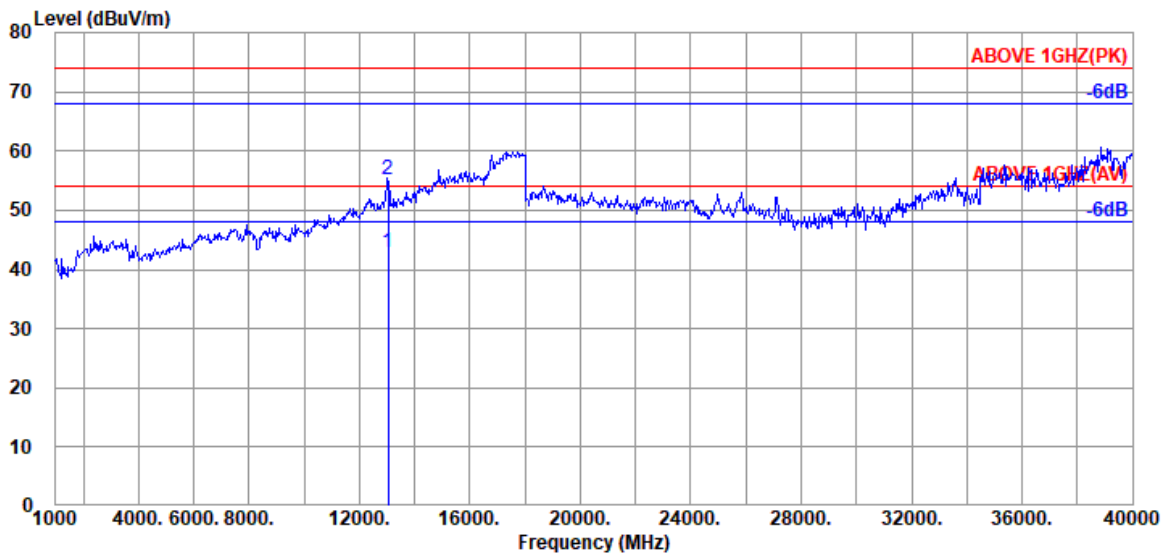

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.83	15.91	33.23	20.23	42.74	54.00	11.26	Average
13030.000	39.83	15.91	33.23	32.73	55.24	74.00	18.76	Peak

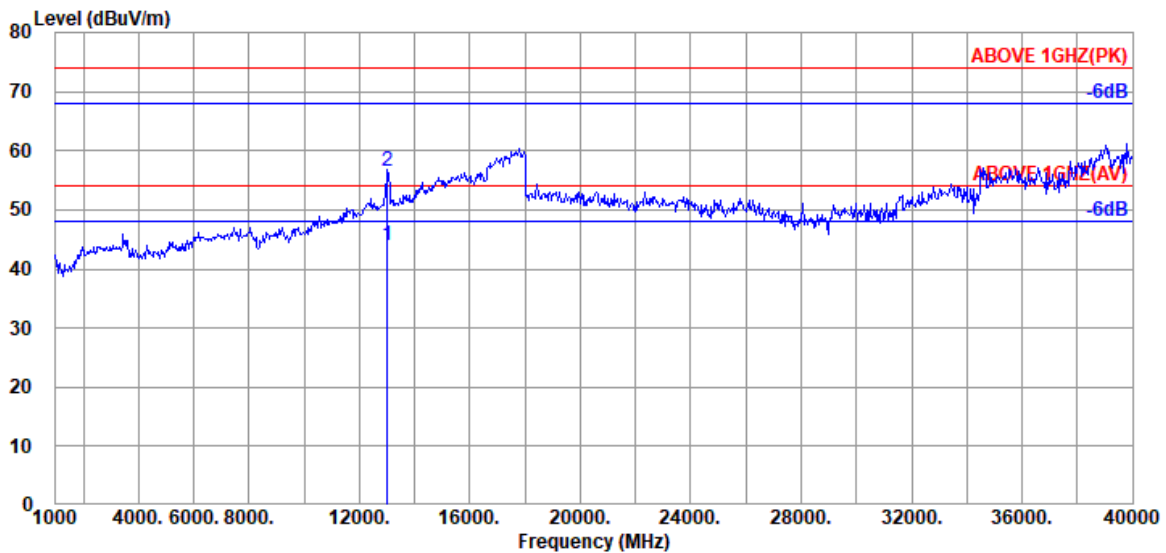


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13020.000	39.83	15.89	33.23	21.59	44.08	54.00	9.92	Average
13020.000	39.83	15.89	33.23	34.14	56.63	74.00	17.37	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	7
		Frequency	TX 6665MHz

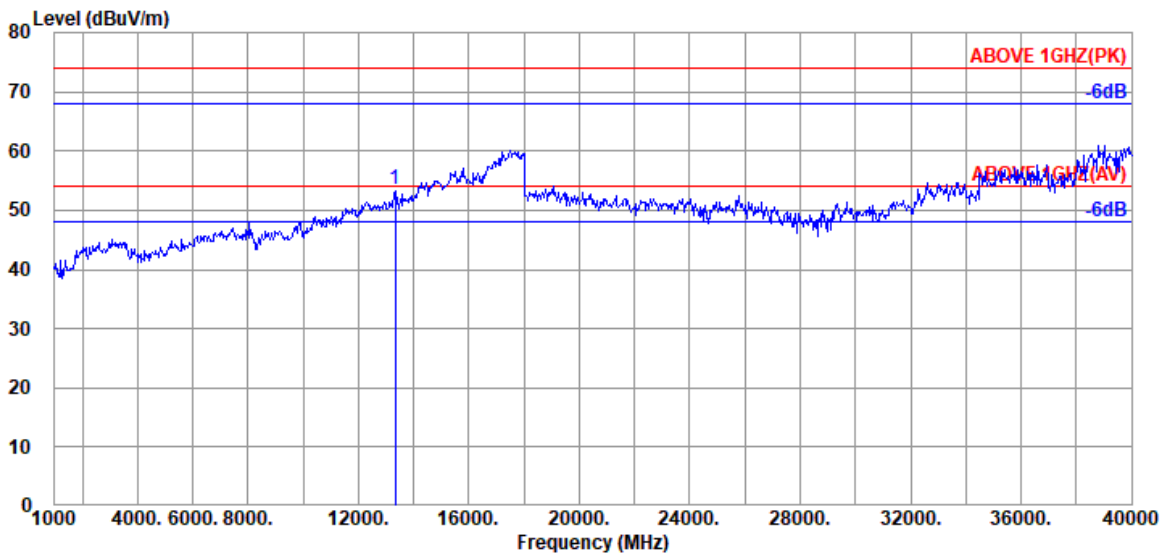

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.27	16.13	33.19	30.20	53.41	54.00	0.59	Peak

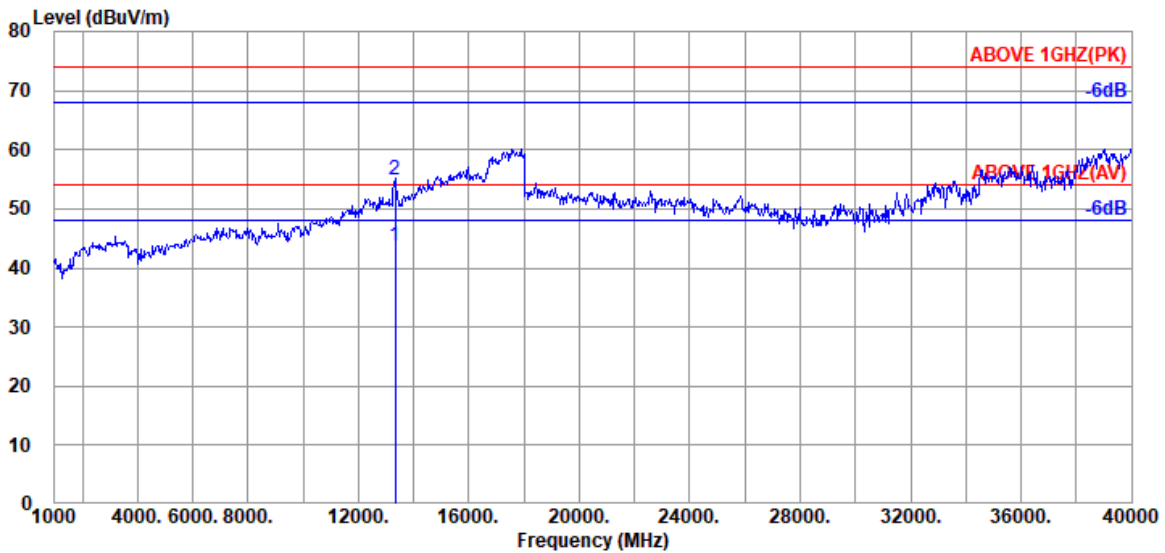


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.27	16.13	33.19	20.45	43.66	54.00	10.34	Average
13330.000	40.27	16.13	33.19	31.73	54.94	74.00	19.06	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	8
		Frequency	TX 6985MHz

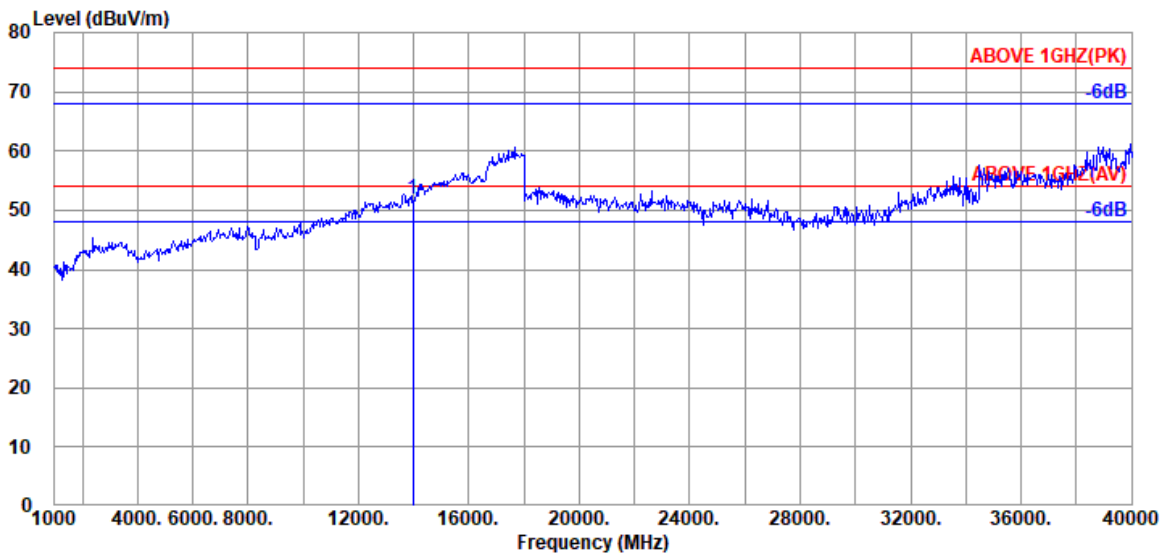

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.45	51.76	54.00	2.24	Peak

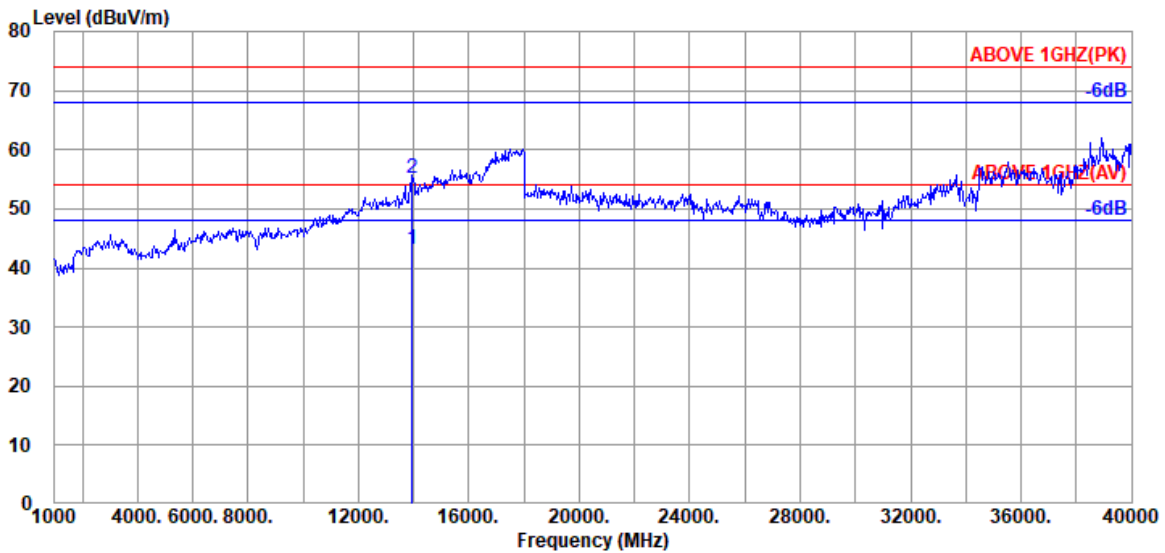

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13950.000	40.85	16.62	33.17	18.84	43.14	54.00	10.86	Average
13950.000	40.85	16.62	33.17	30.90	55.20	74.00	18.80	Peak

Mode	802.11ax-HT20	U-NII Band	5
		Frequency	TX 5955MHz

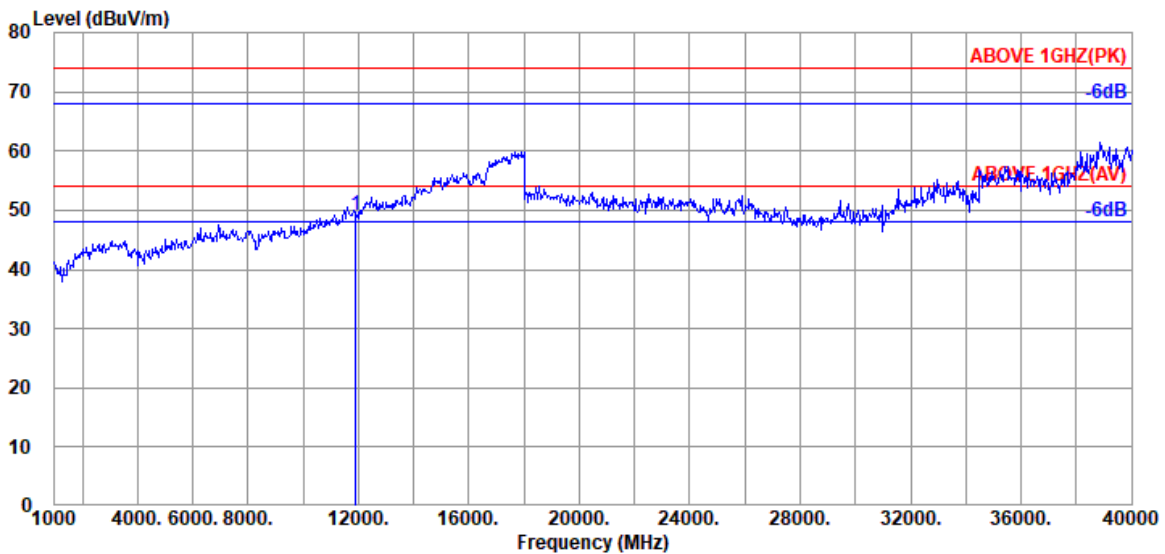

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	28.91	49.21	54.00	4.79	Peak

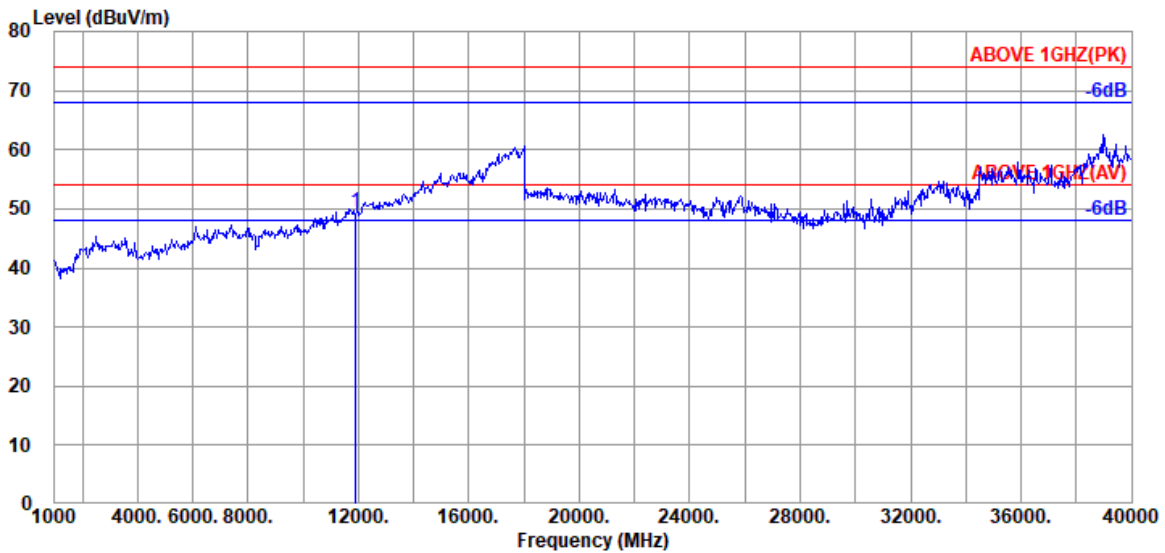

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.90	14.91	33.51	28.99	49.29	54.00	4.71	Peak

Mode	802.11ax-HT20	U-NII Band	6
		Frequency	TX 6475MHz

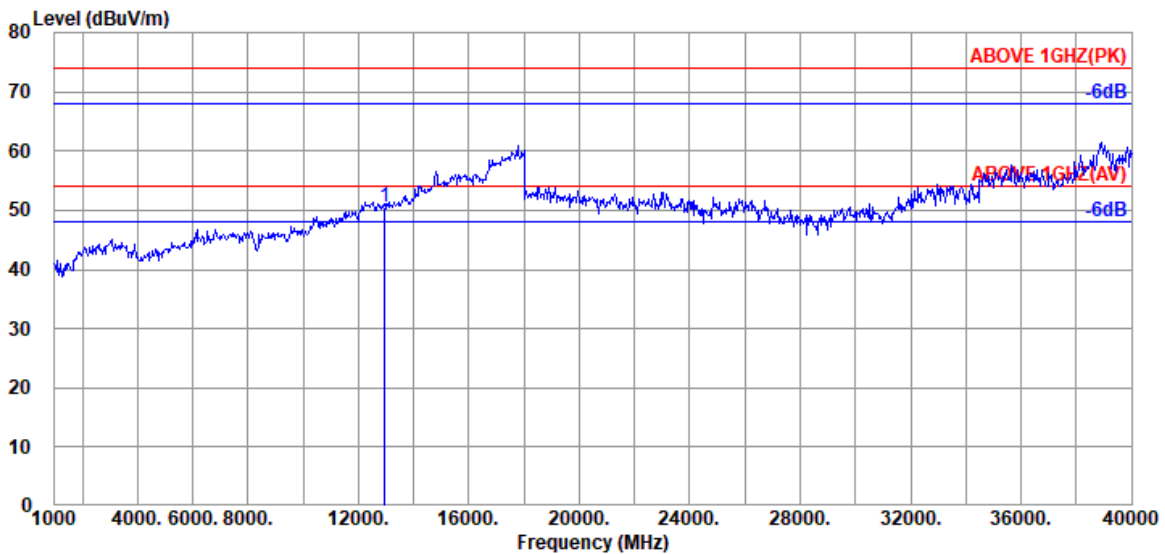

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	28.15	50.45	54.00	3.55	Peak

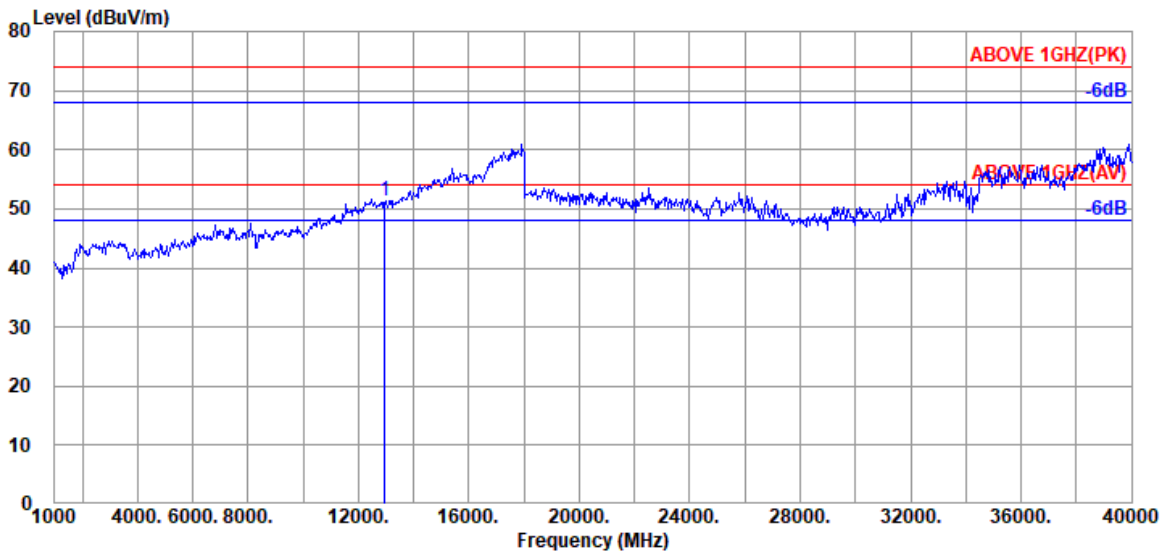

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12950.000	39.70	15.84	33.24	29.15	51.45	54.00	2.55	Peak

Mode	802.11ax-HT20	U-NII Band	7
		Frequency	TX 6855MHz

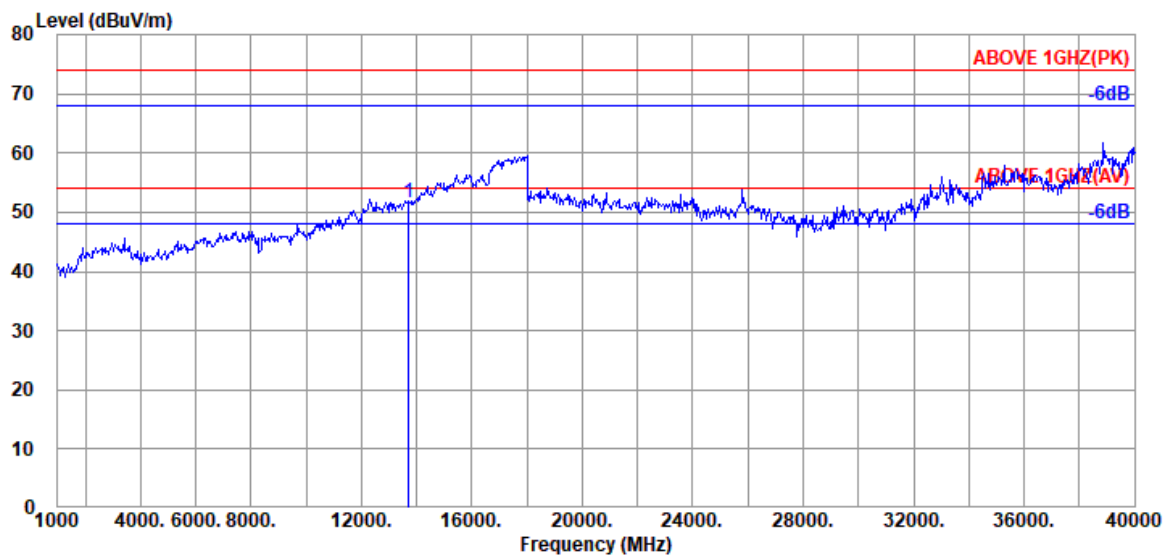

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13710.000	40.60	16.44	33.16	27.75	51.63	54.00	2.37	Peak

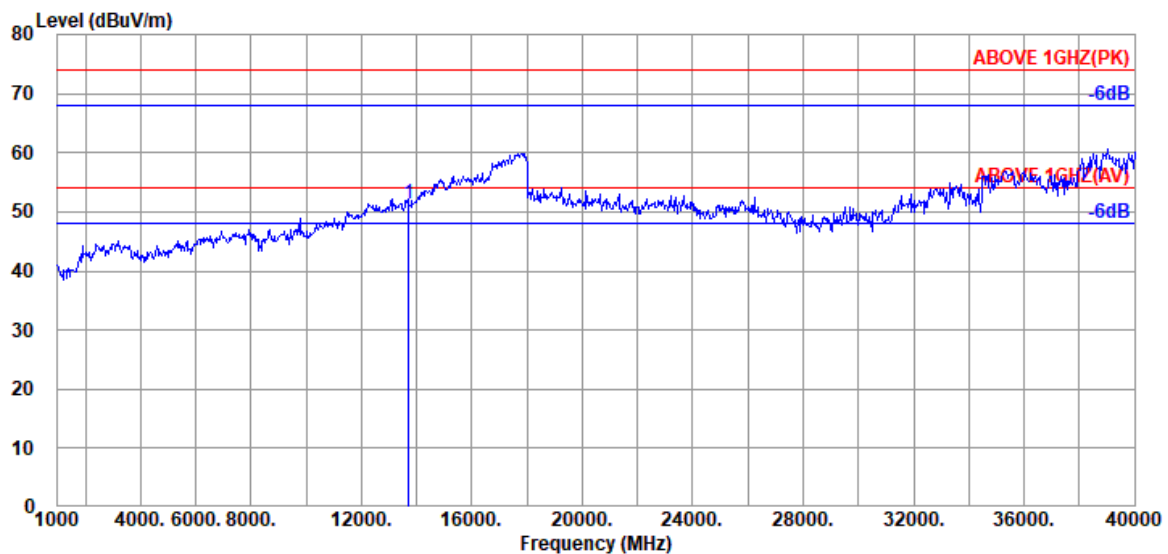

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13710.000	40.60	16.44	33.16	27.49	51.37	54.00	2.63	Peak

Mode	802.11ax-HT20	U-NII Band	8
		Frequency	TX 6875MHz

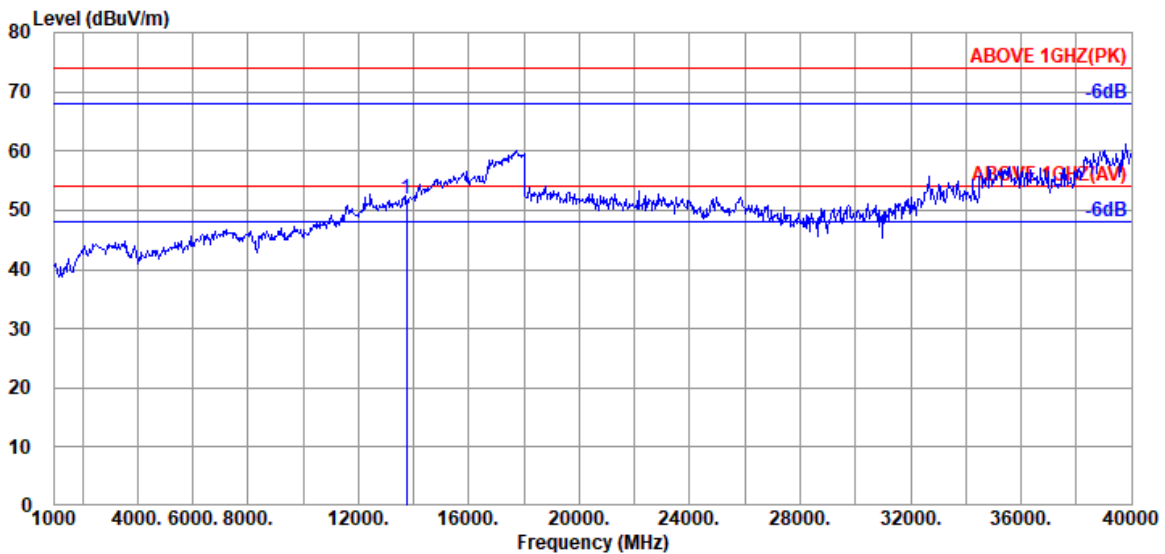

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	40.70	16.46	33.17	27.77	51.76	54.00	2.24	Peak

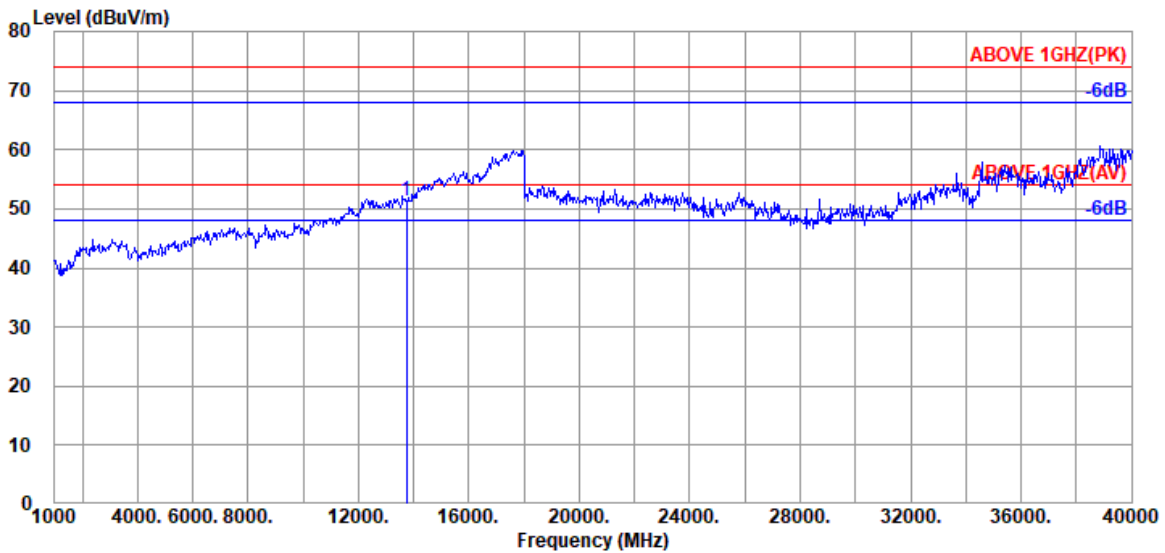


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	40.70	16.46	33.17	27.44	51.43	54.00	2.57	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT40	U-NII Band	5
		Frequency	TX 5965MHz

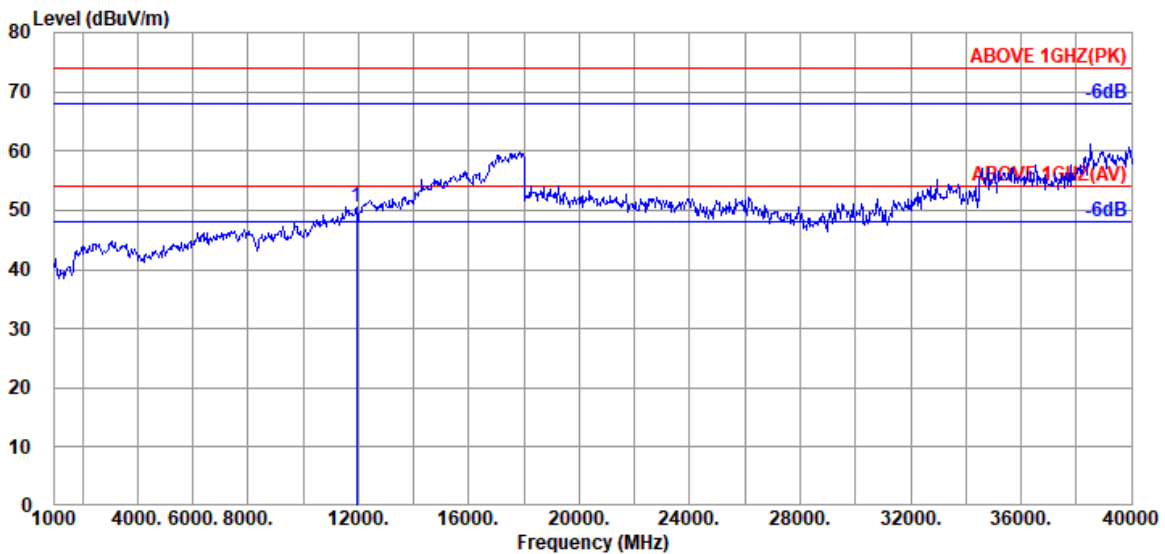

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.87	14.94	33.51	30.11	50.41	54.00	3.59	Peak

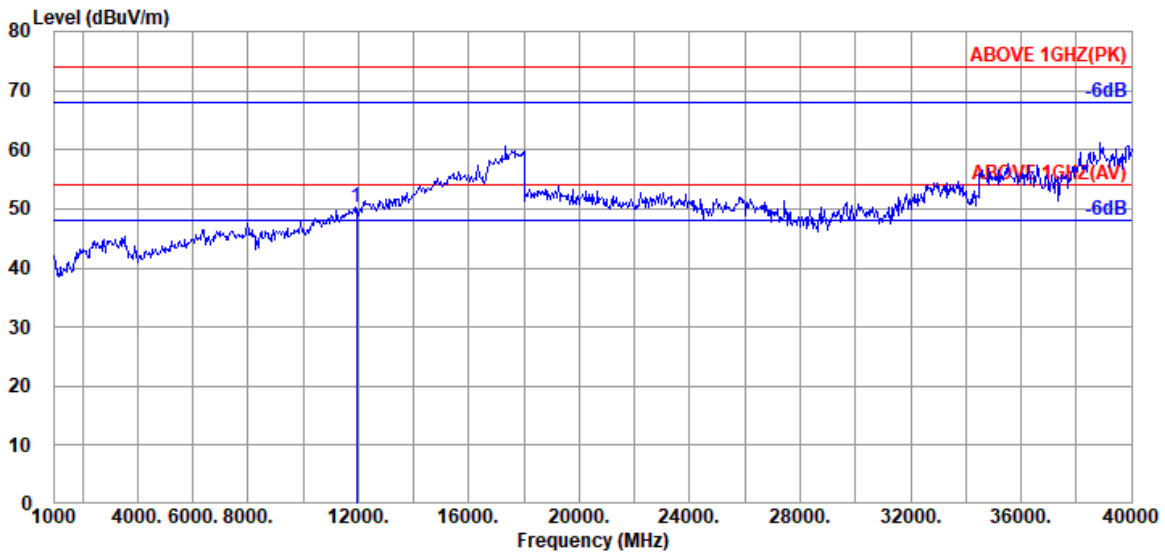

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.87	14.94	33.51	29.90	50.20	54.00	3.80	Peak

Mode	802.11ax-HT40	U-NII Band	6
		Frequency	TX 6485MHz

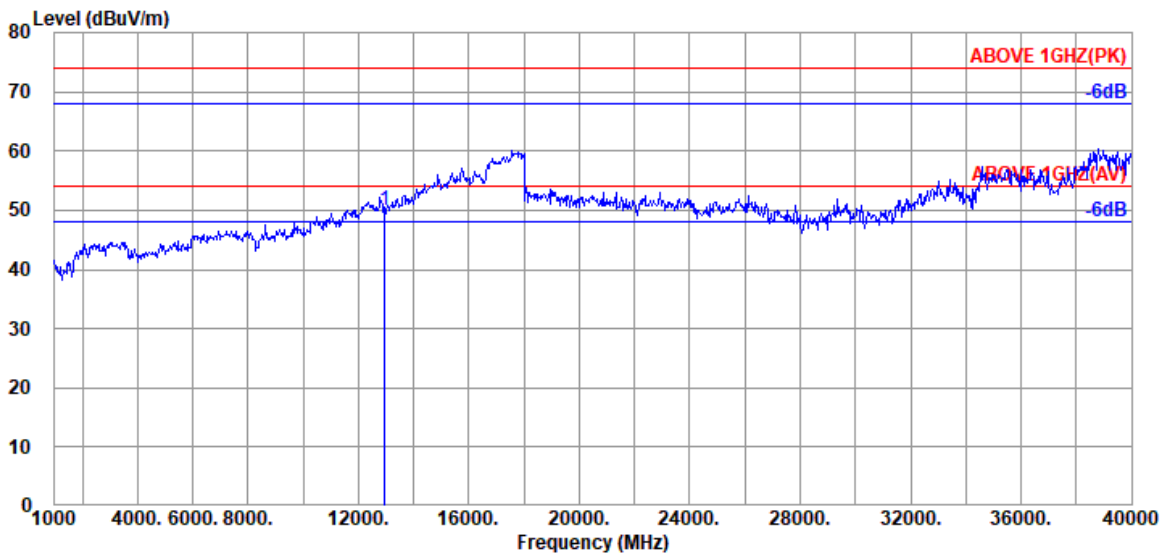

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.80	15.85	33.24	27.61	50.02	54.00	3.98	Peak

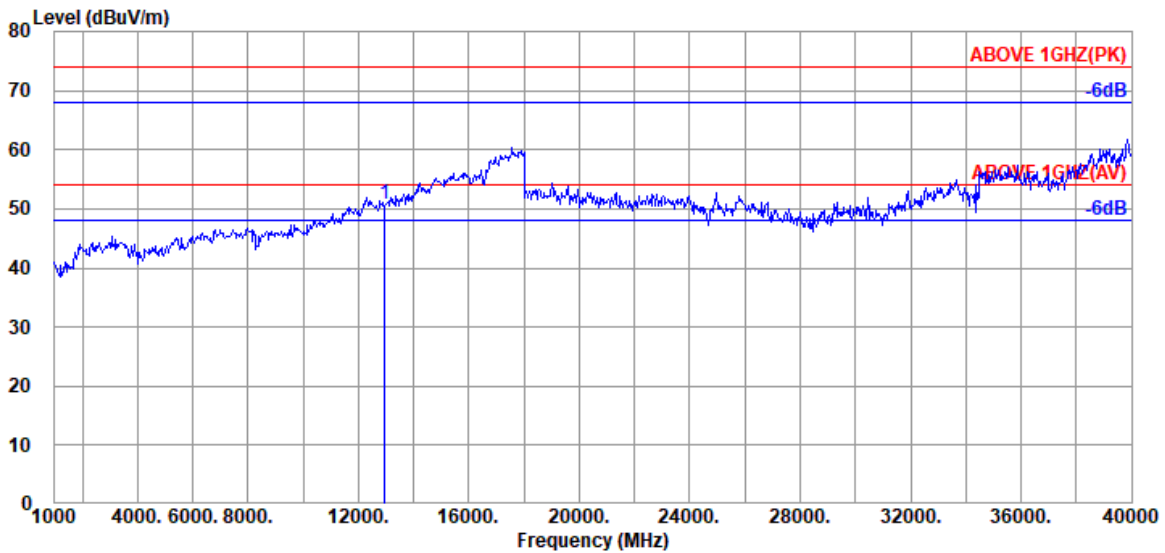


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.80	15.85	33.24	28.28	50.69	54.00	3.31	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT40	U-NII Band	7
		Frequency	TX 6525MHz

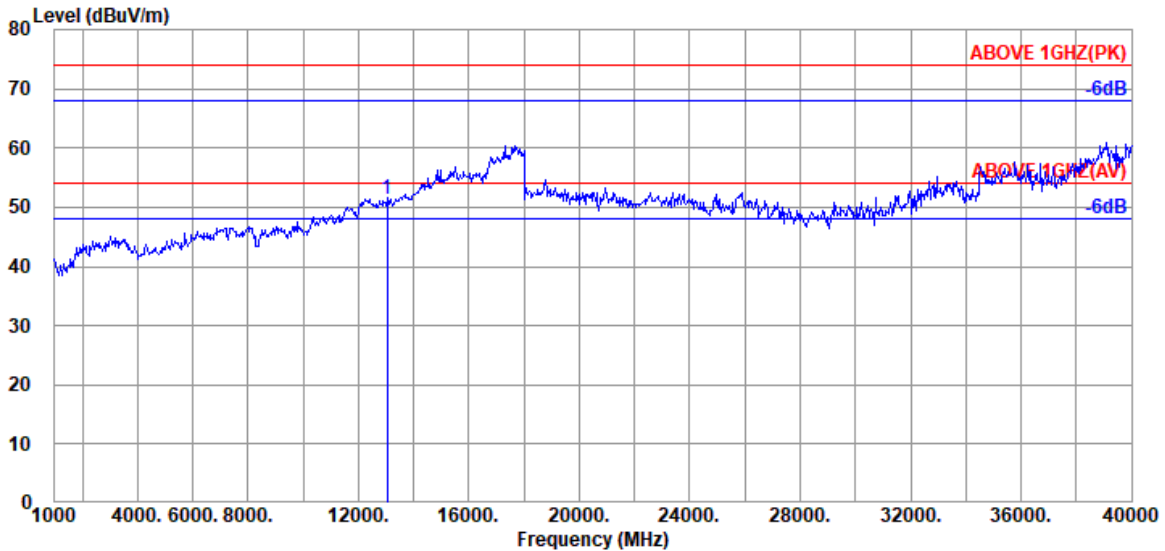

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.87	15.92	33.22	28.86	51.43	54.00	2.57	Peak

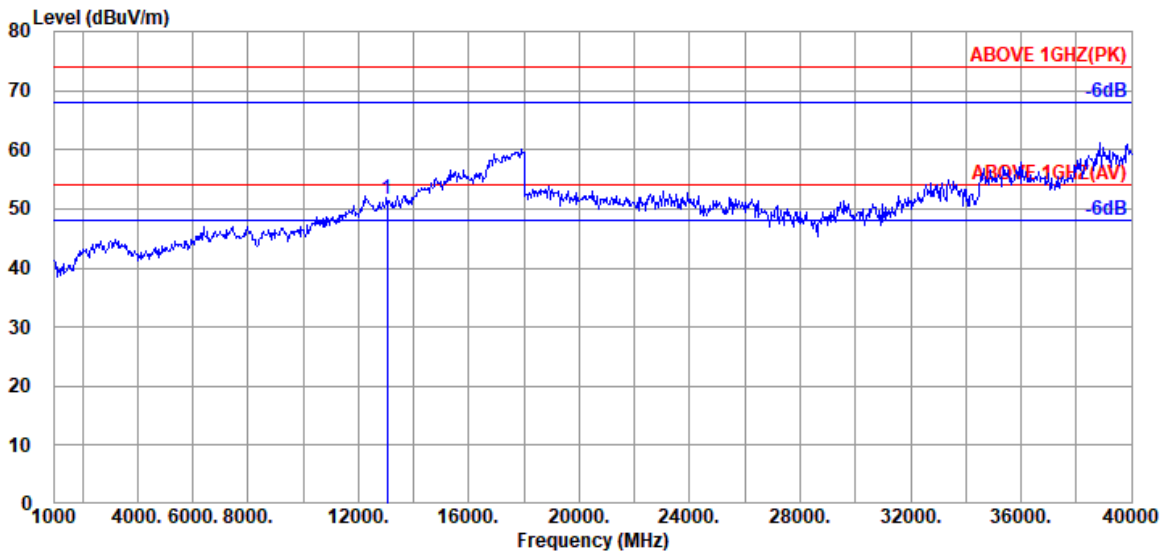


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.87	15.92	33.22	29.12	51.69	54.00	2.31	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT40	U-NII Band	8
		Frequency	TX 7005MHz

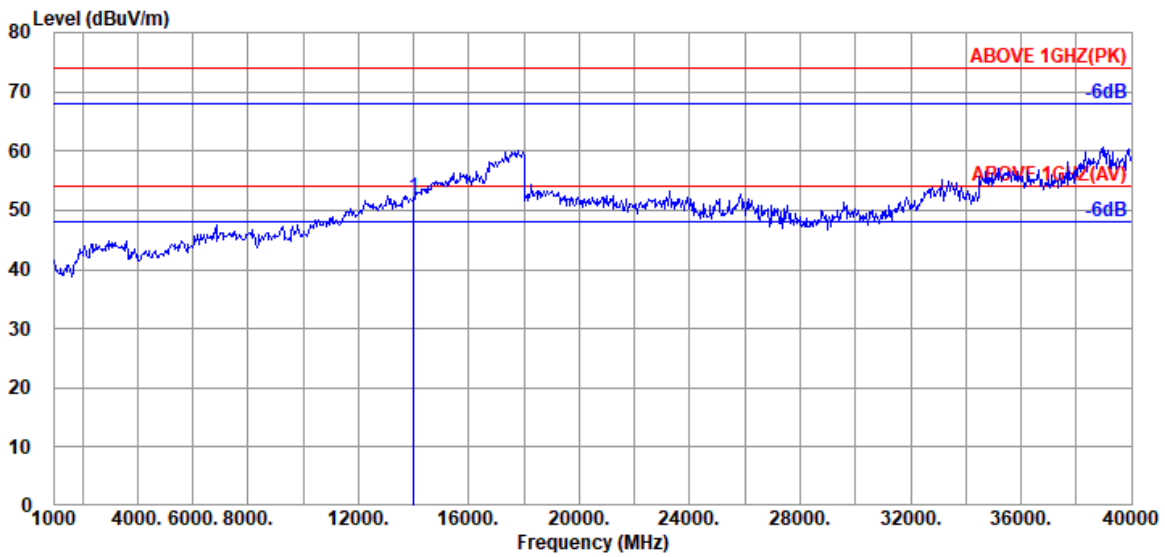

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	40.90	16.66	33.17	27.86	52.25	54.00	1.75	Peak

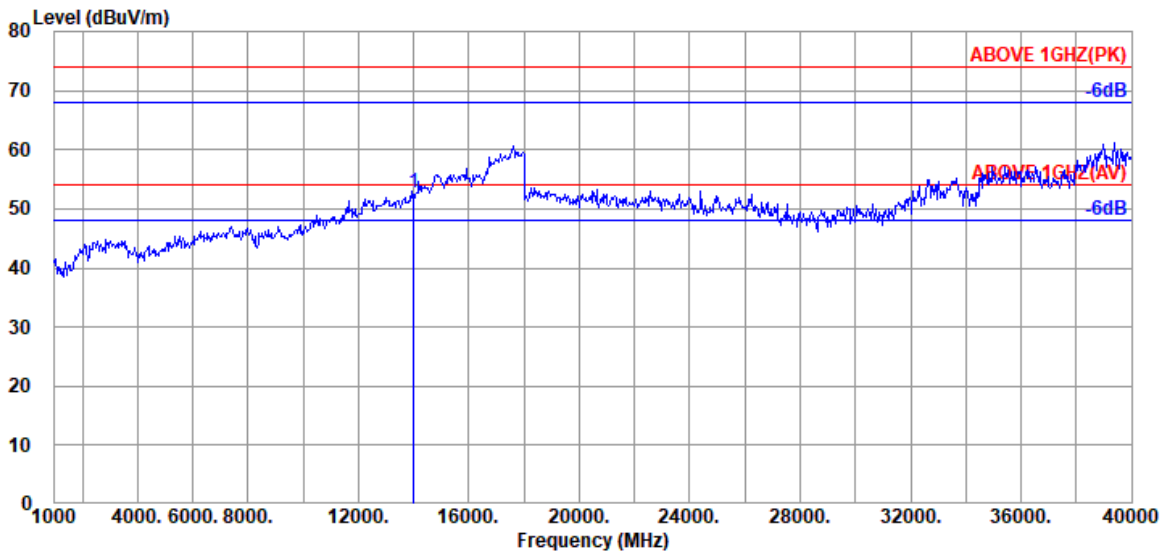


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	40.90	16.66	33.17	28.17	52.56	54.00	1.44	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT80	U-NII Band	5
		Frequency	TX 5985MHz

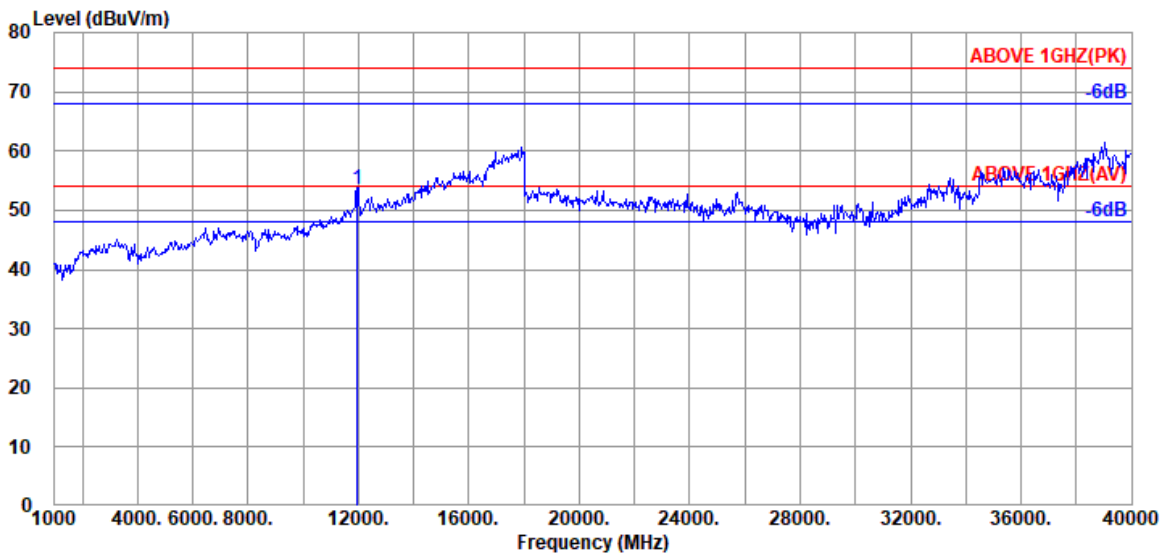

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.83	14.99	33.50	33.33	53.65	54.00	0.35	Peak

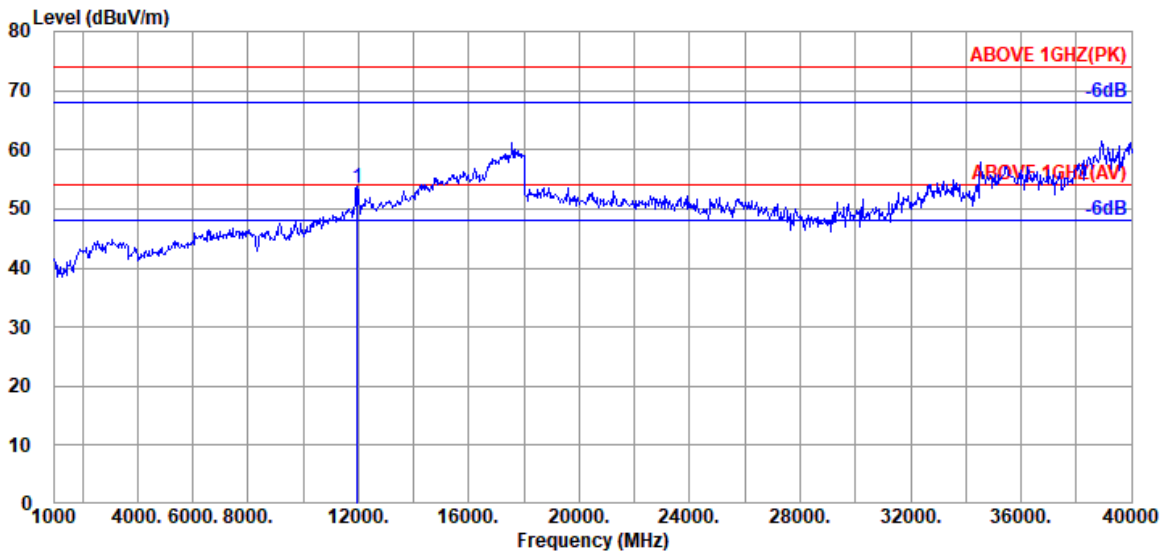


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.83	14.99	33.50	33.08	53.40	54.00	0.60	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT80	U-NII Band	6
		Frequency	TX 6545MHz

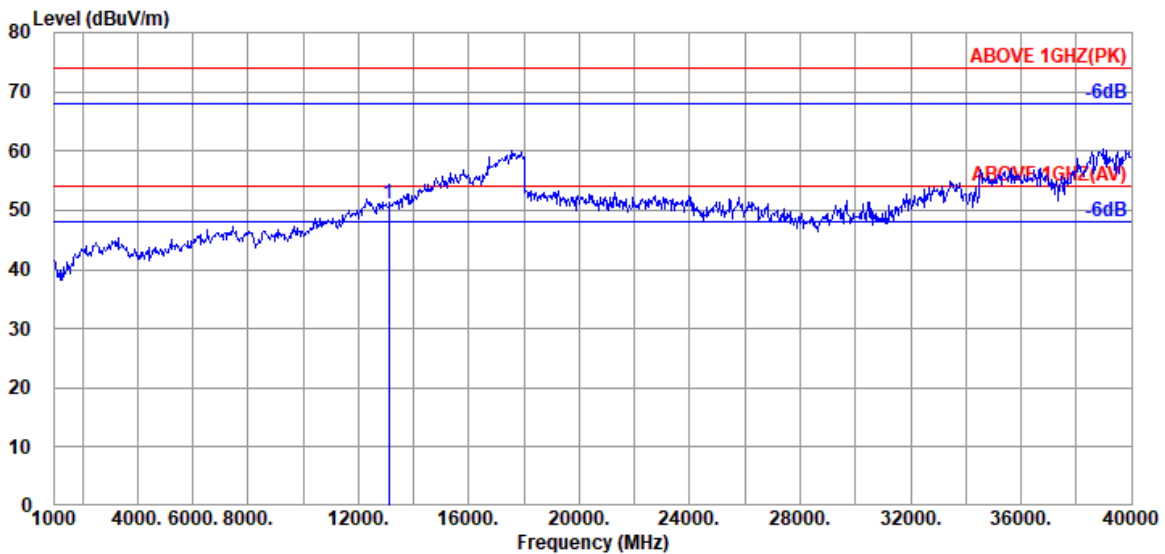

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.90	15.95	33.22	28.34	50.97	54.00	3.03	Peak

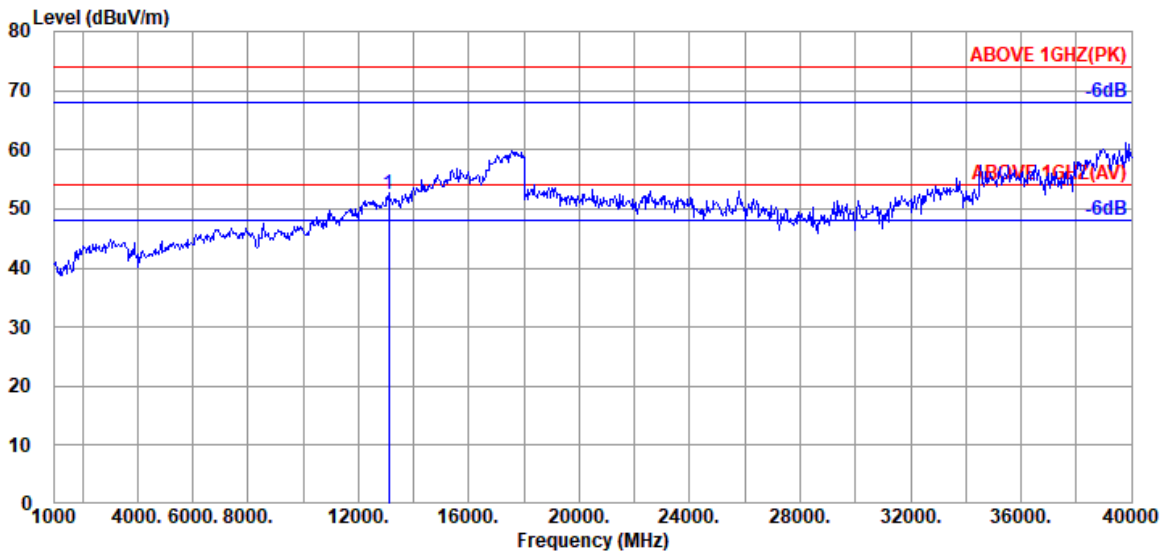

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.90	15.95	33.22	29.89	52.52	54.00	1.48	Peak

Mode	802.11ax-HT80	U-NII Band	7
		Frequency	TX 6625MHz

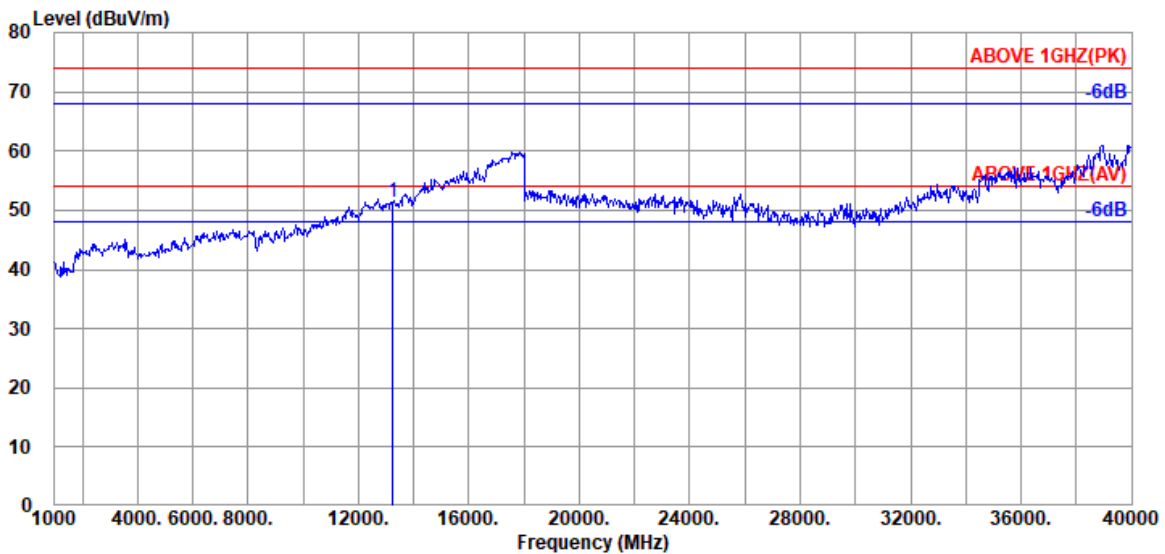

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.15	16.08	33.20	28.39	51.42	54.00	2.58	Peak

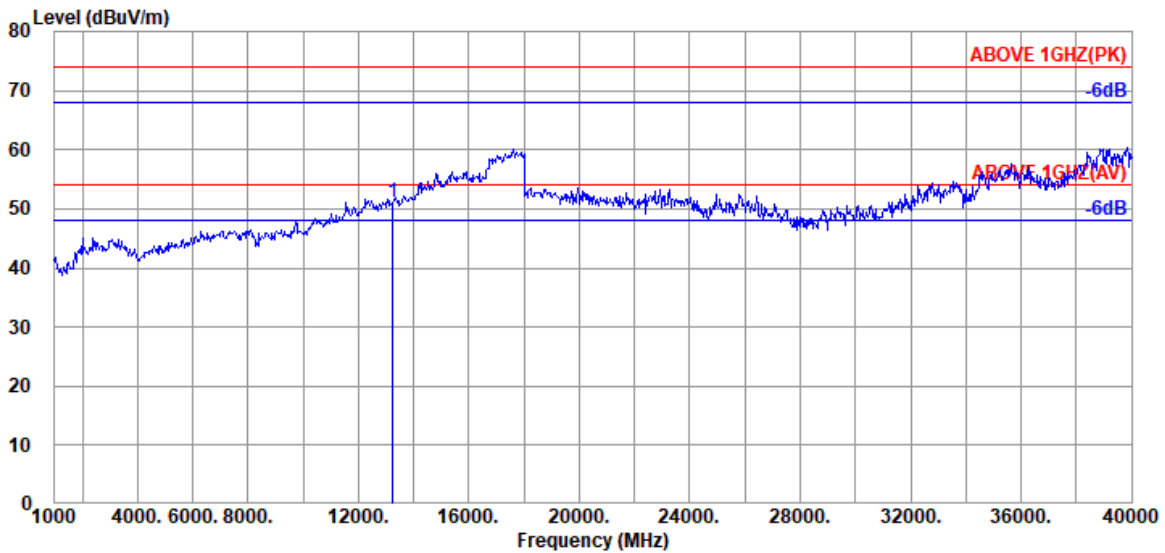


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.15	16.08	33.20	28.05	51.08	54.00	2.92	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT80	U-NII Band	8
		Frequency	TX 6945MHz

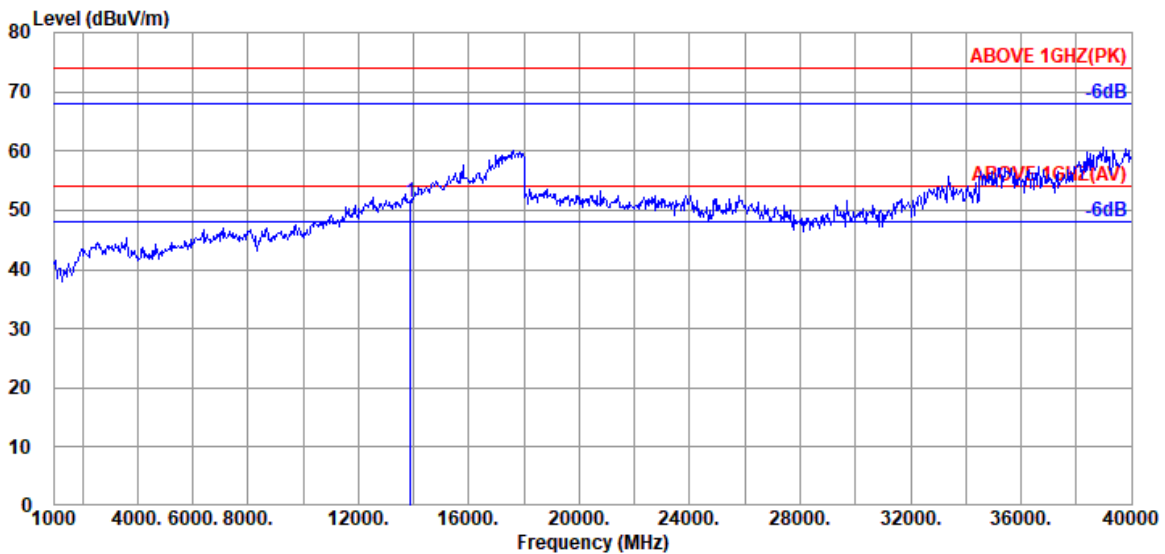

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	40.80	16.57	33.17	27.25	51.45	54.00	2.55	Peak

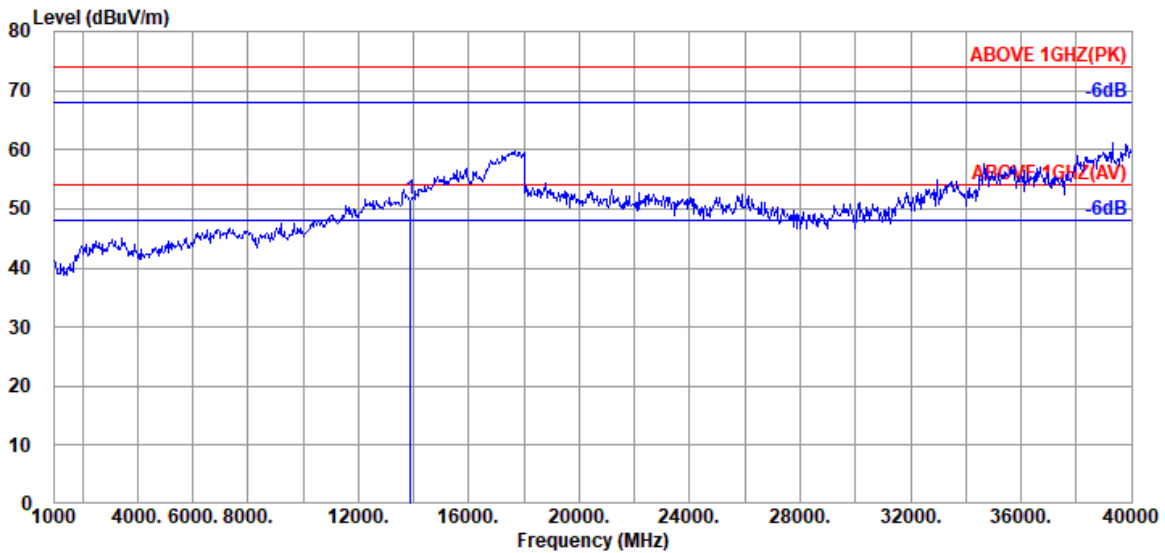

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	40.80	16.57	33.17	27.33	51.53	54.00	2.47	Peak

Mode	802.11ax-HT160	U-NII Band	5
		Frequency	TX 6345MHz

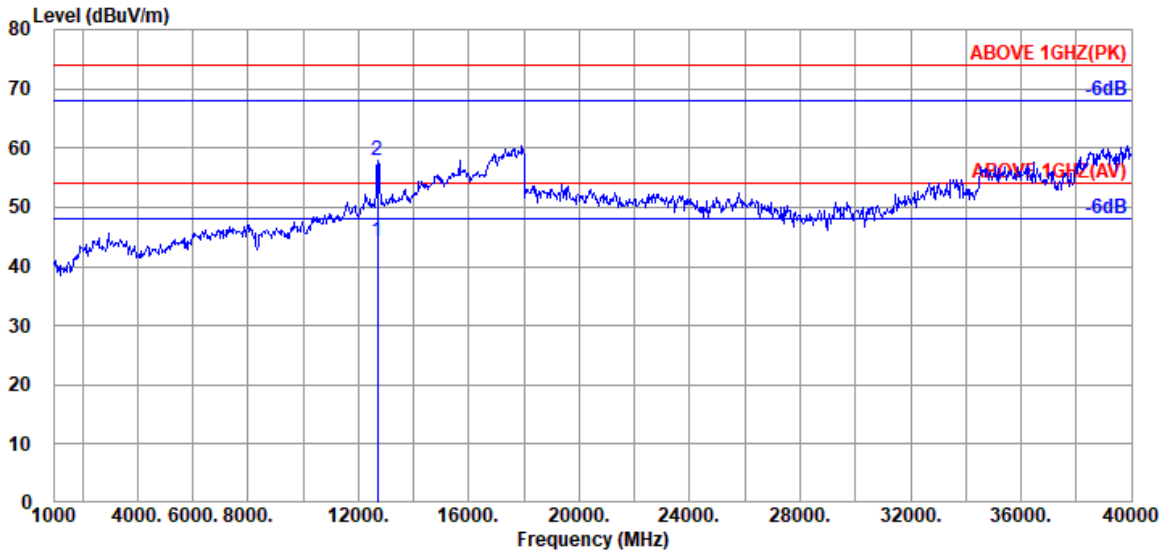

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12700.000	39.40	15.62	33.31	22.58	44.29	54.00	9.71	Average
12700.000	39.40	15.62	33.31	36.19	57.90	74.00	16.10	Peak

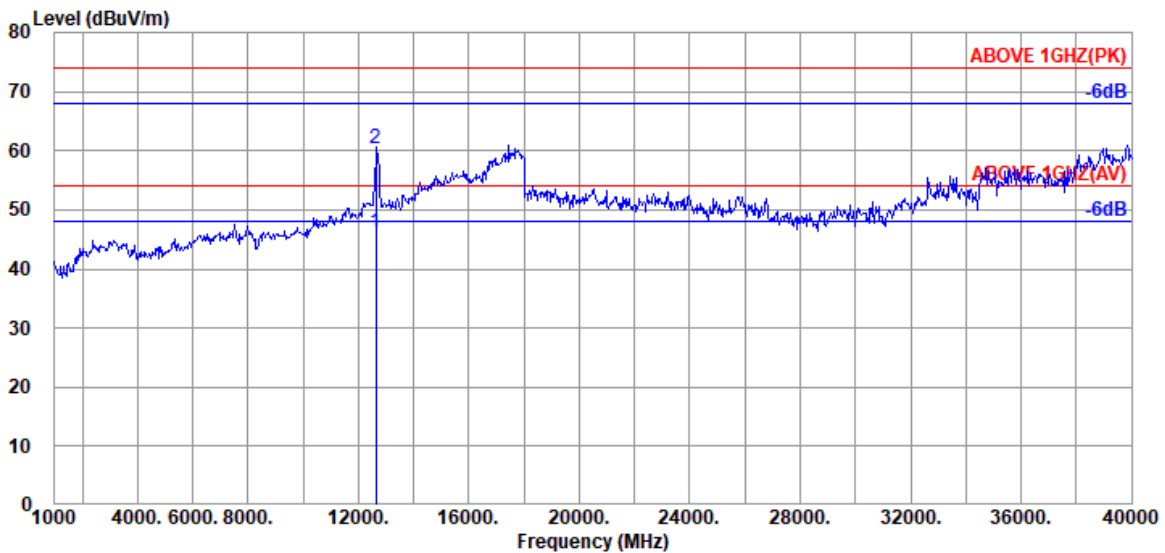


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12650.000	39.25	15.58	33.33	24.57	46.07	54.00	7.93	Average
12650.000	39.25	15.58	33.33	38.77	60.27	74.00	13.73	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT160	U-NII Band	6
		Frequency	TX 6505MHz

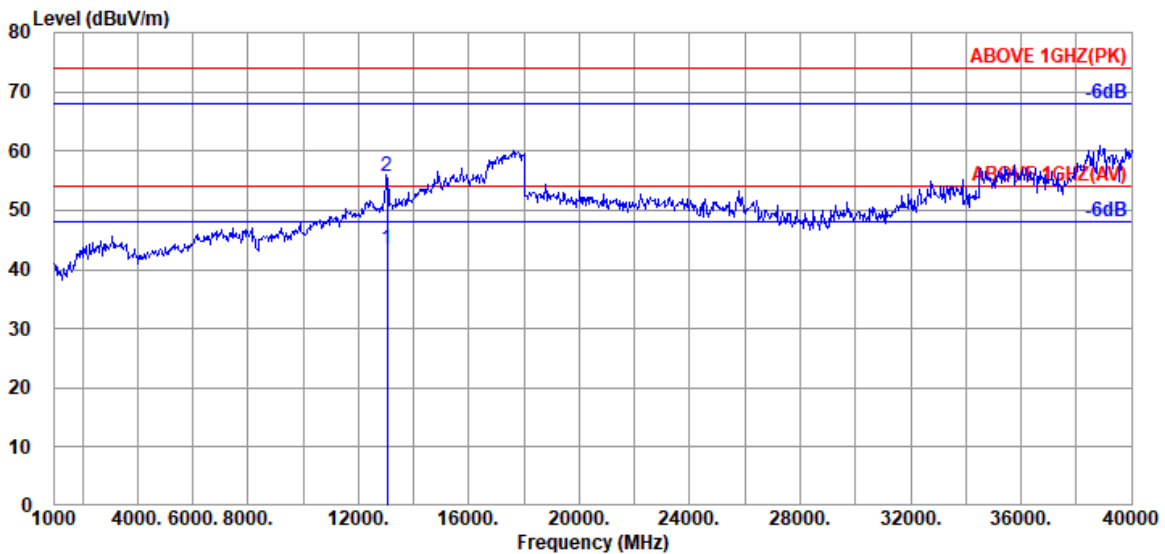

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.83	15.91	33.23	20.95	43.46	54.00	10.54	Average
13030.000	39.83	15.91	33.23	33.08	55.59	74.00	18.41	Peak

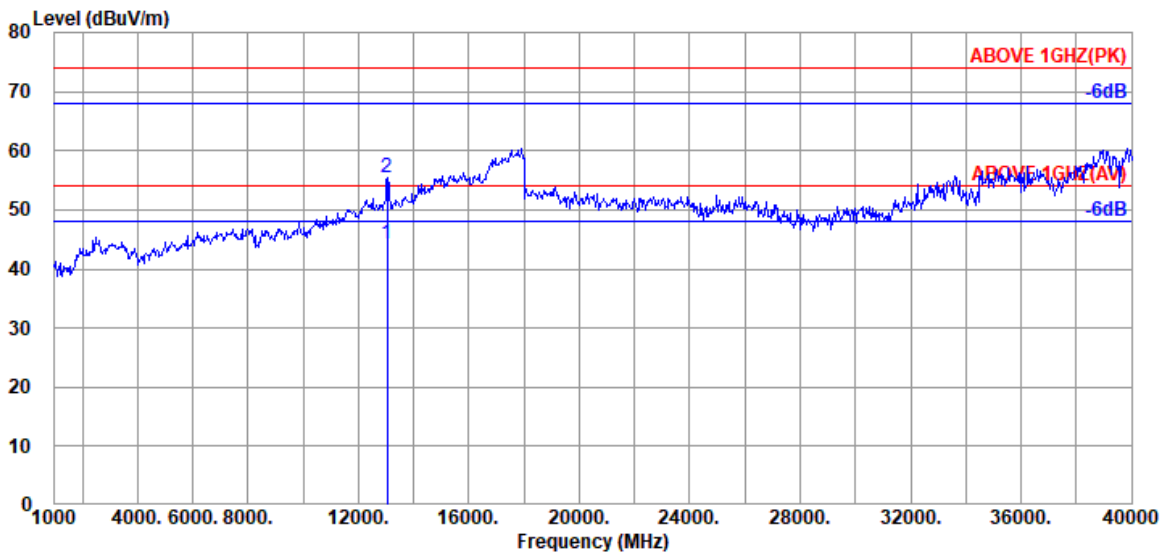


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13040.000	39.83	15.91	33.22	21.76	44.28	54.00	9.72	Average
13040.000	39.83	15.91	33.22	33.02	55.54	74.00	18.46	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HT160	U-NII Band	7
		Frequency	TX 6665MHz

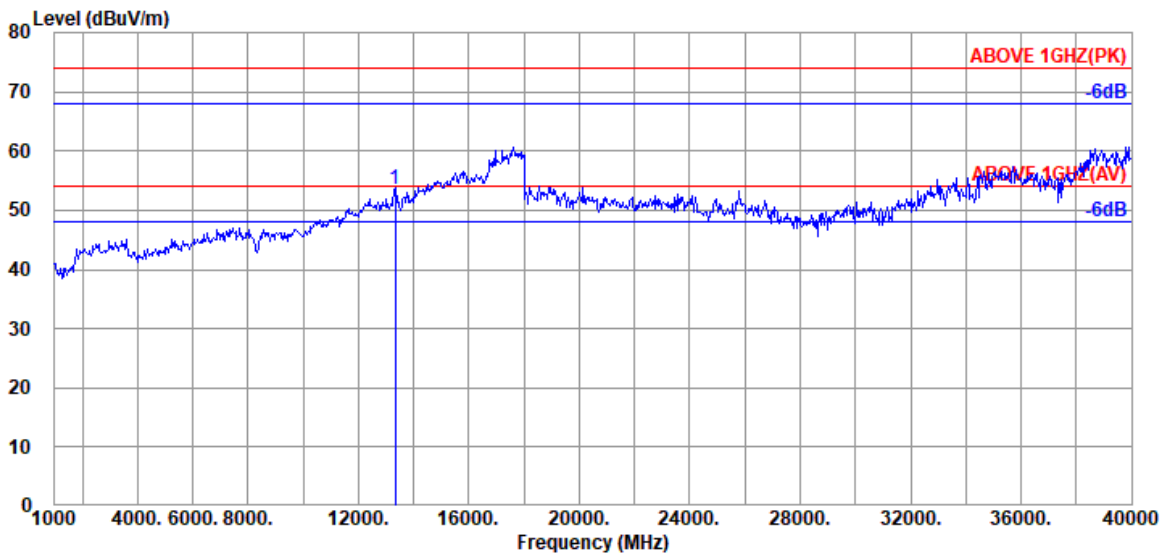

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.27	16.13	33.19	30.25	53.46	54.00	0.54	Peak

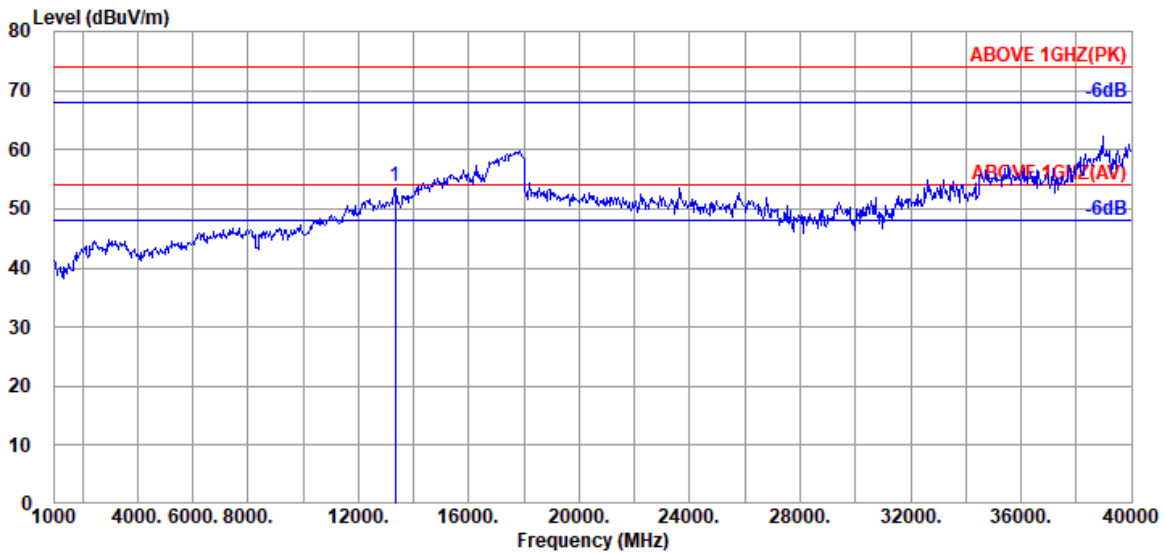

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.27	16.13	33.19	30.54	53.75	54.00	0.25	Peak

Mode	802.11ax-HT160	U-NII Band	8
		Frequency	TX 6985MHz

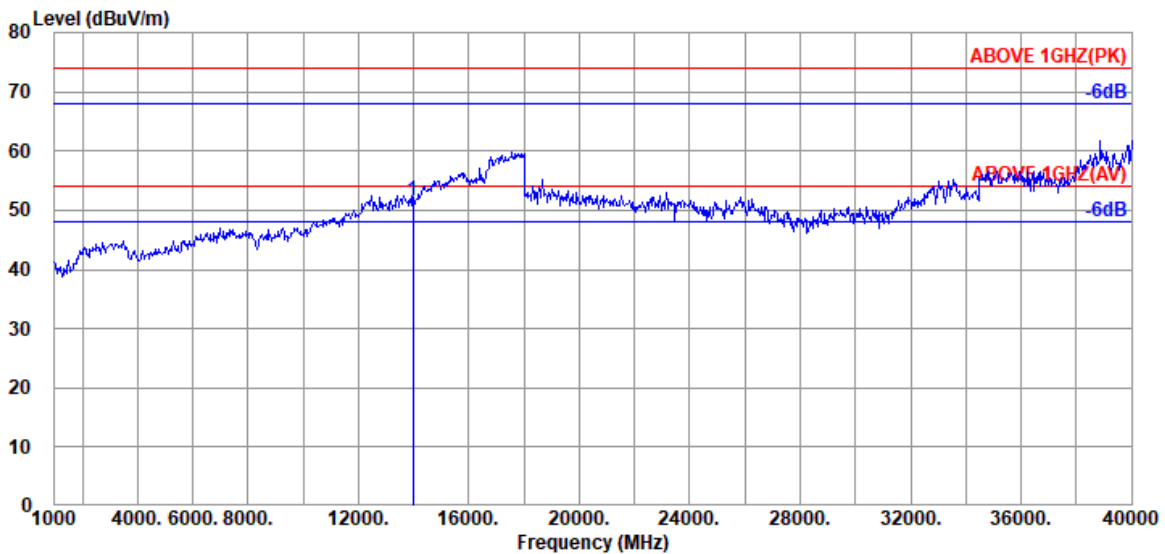

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.21	51.52	54.00	2.48	Peak

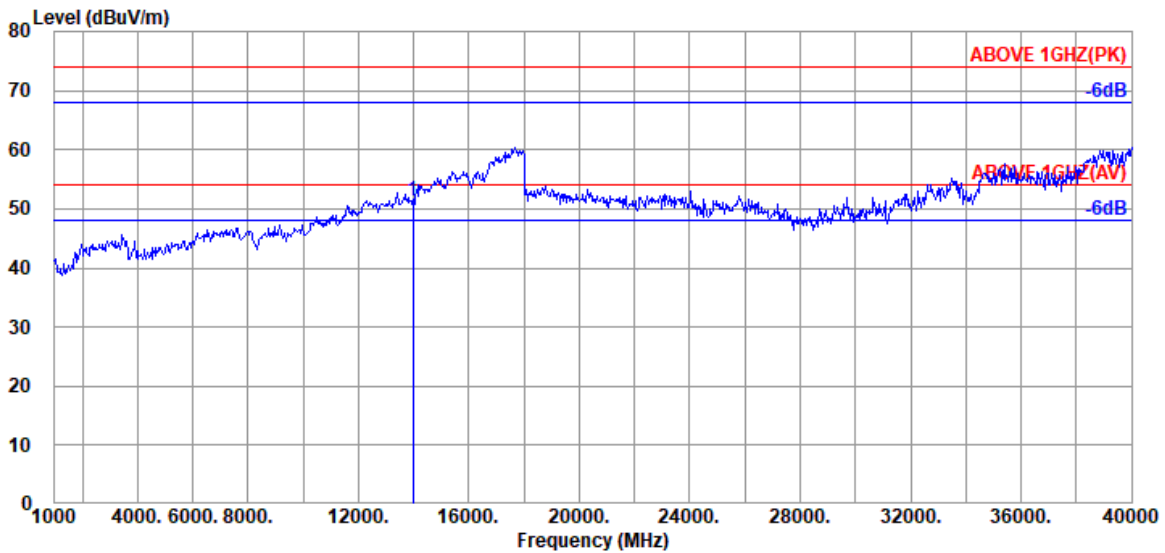

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.07	51.38	54.00	2.62	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303


● OFDMA Modulation

Tones	26T	RU Index	18
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

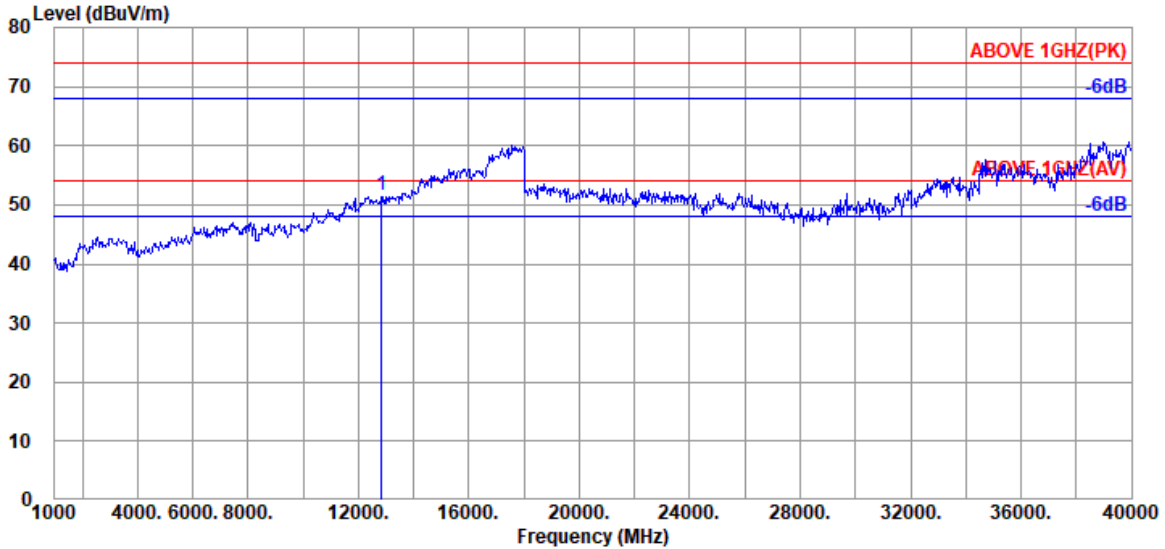

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12830.000	39.53	15.74	33.27	29.65	51.65	54.00	2.35	Peak

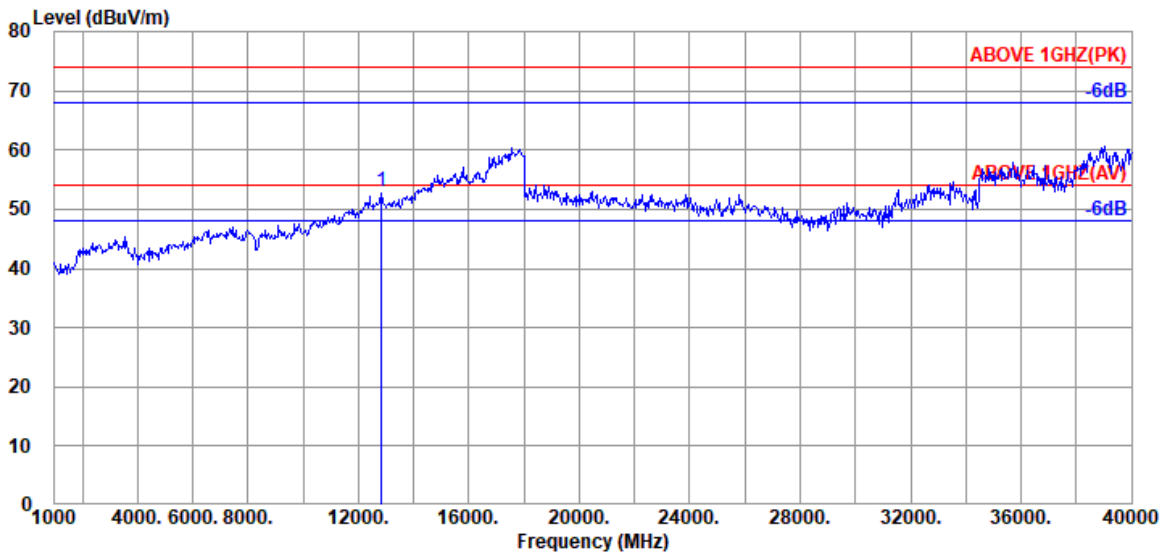


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12830.000	39.53	15.74	33.27	30.85	52.85	54.00	1.15	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

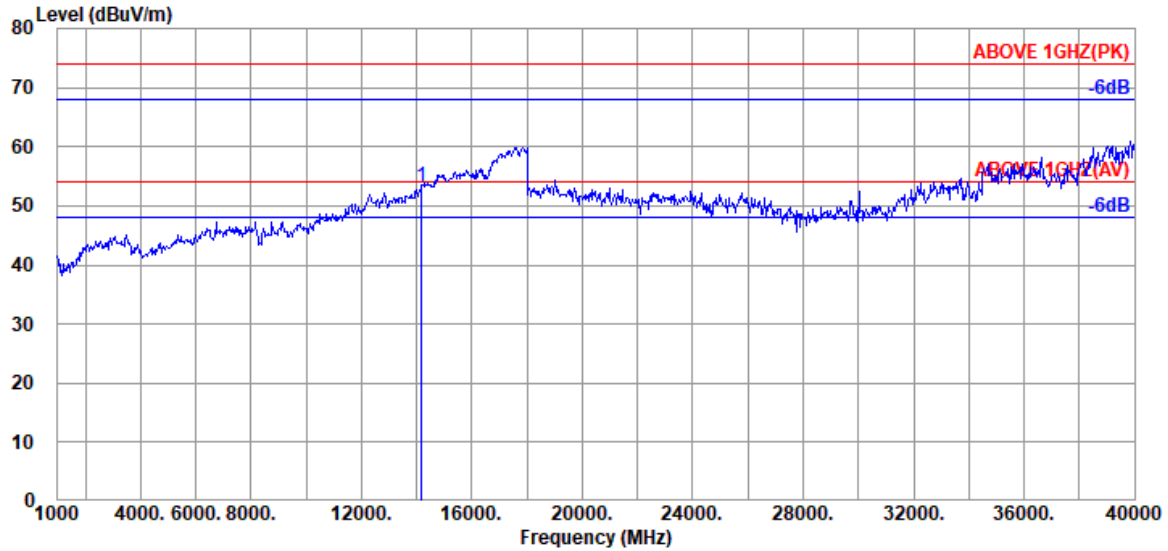

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	40.55	16.74	33.17	29.22	53.34	54.00	0.66	Peak

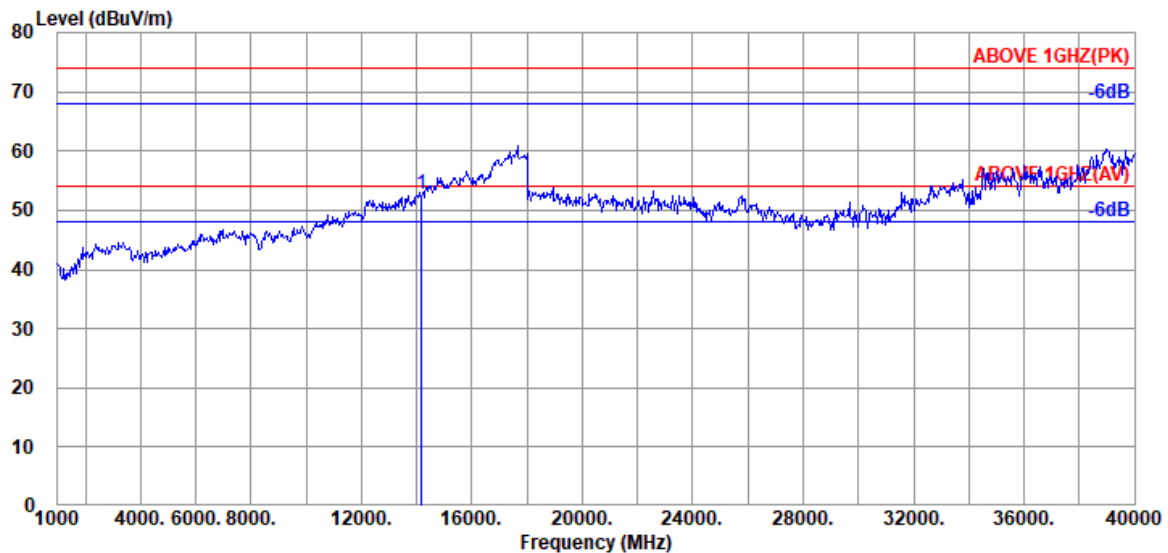


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	40.55	16.74	33.17	28.47	52.59	54.00	1.41	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

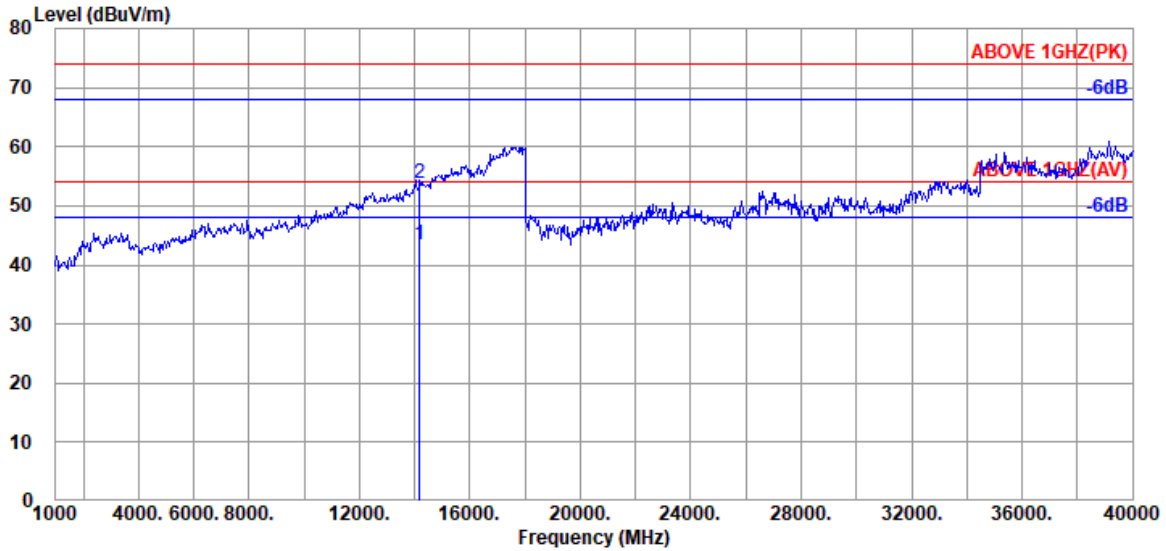

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	40.55	16.74	33.17	19.20	43.32	54.00	10.68	Average
14170.000	40.55	16.74	33.17	29.68	53.80	74.00	20.20	Peak

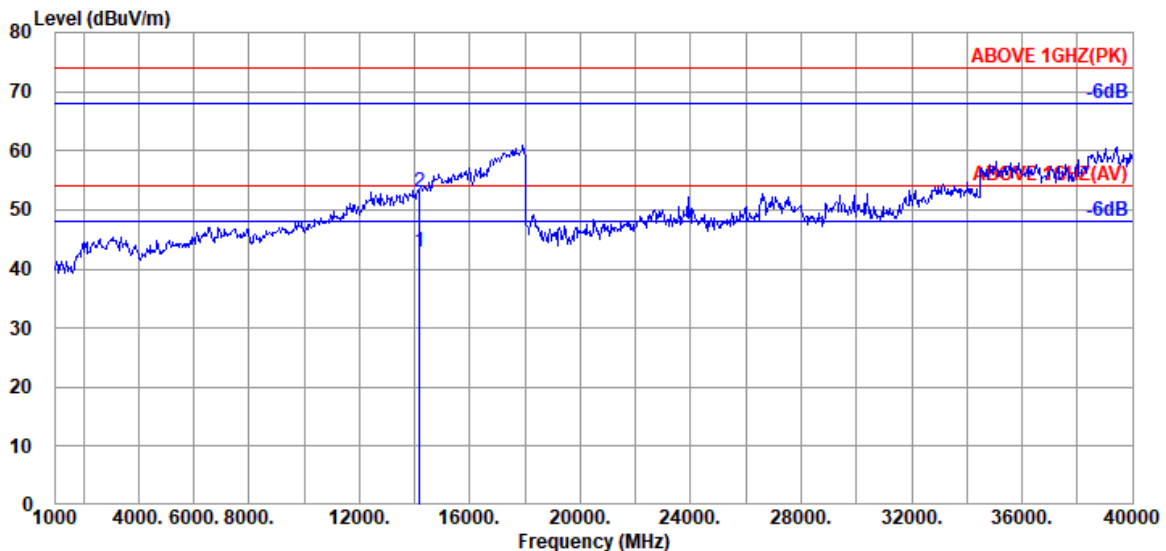


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	40.55	16.74	33.17	18.76	42.88	54.00	11.12	Average
14170.000	40.55	16.74	33.17	28.97	53.09	74.00	20.91	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Tones	242T	RU Index	S61
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

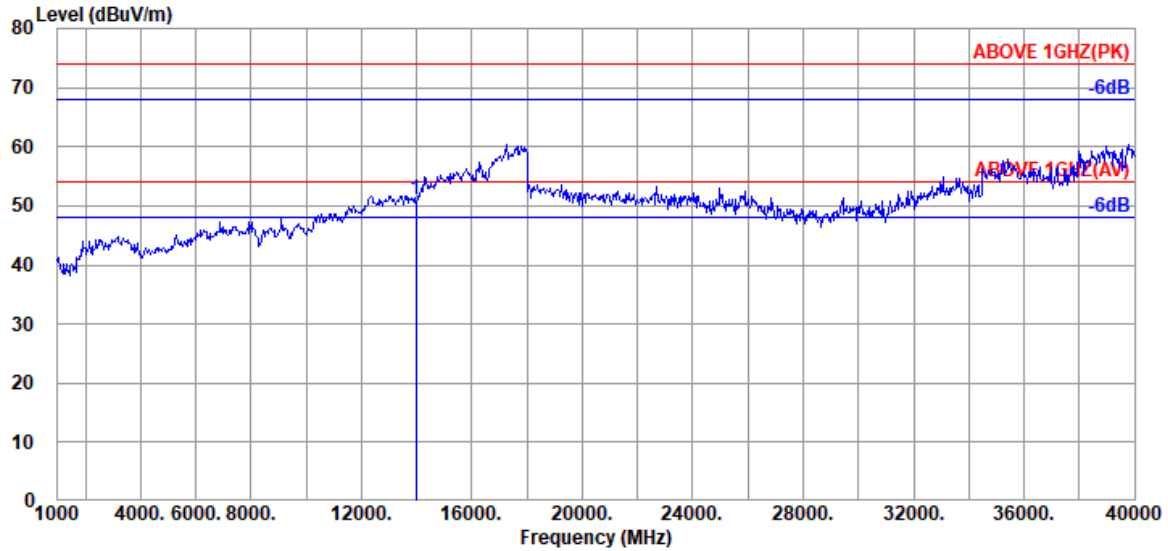

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	26.87	51.18	54.00	2.82	Peak

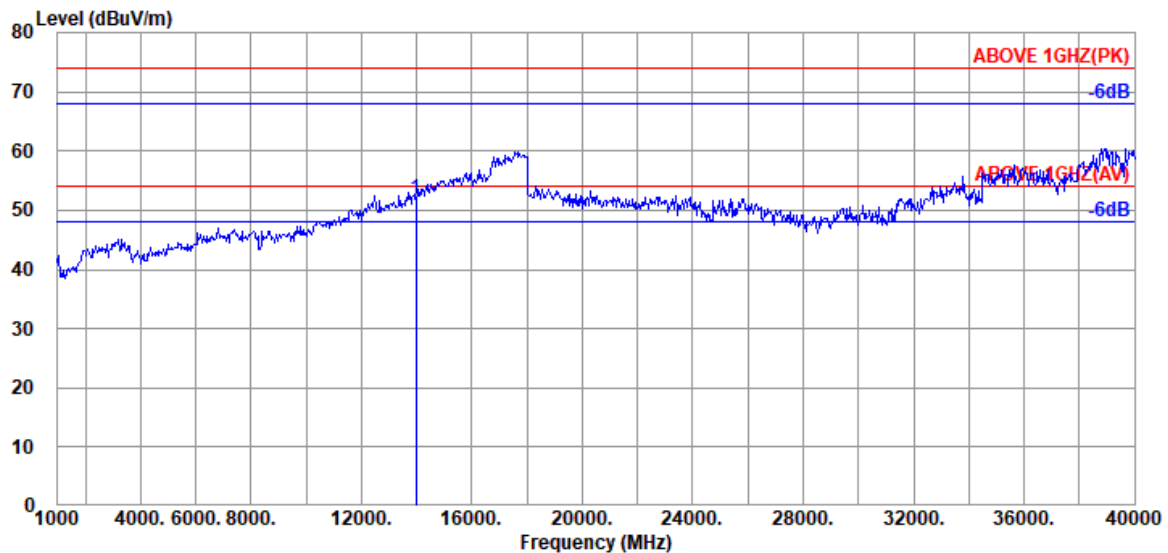


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.51	51.82	54.00	2.18	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Tones	484T	RU Index	S65
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

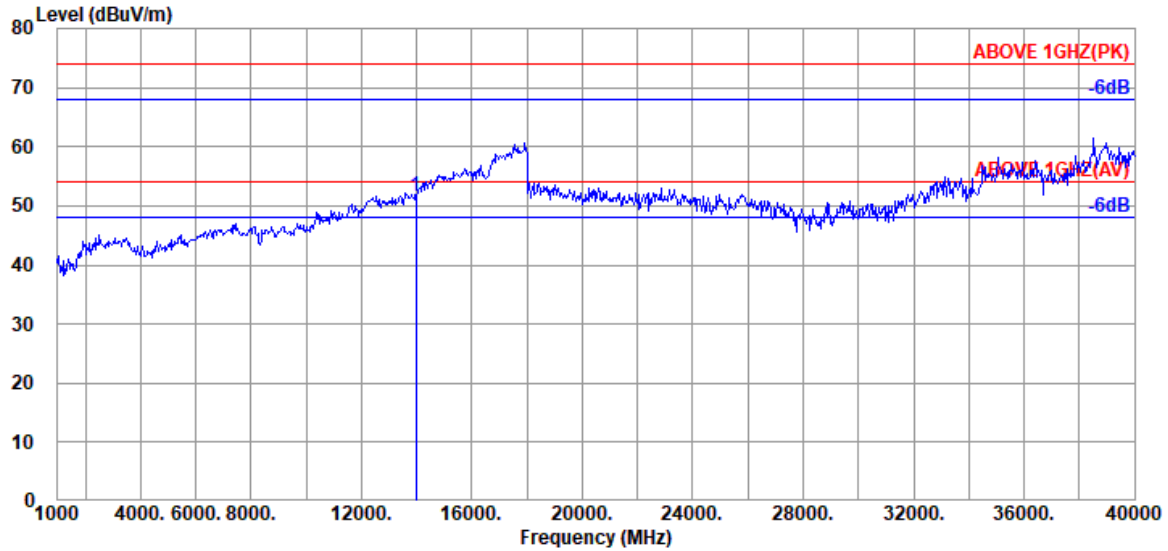

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.28	51.59	54.00	2.41	Peak

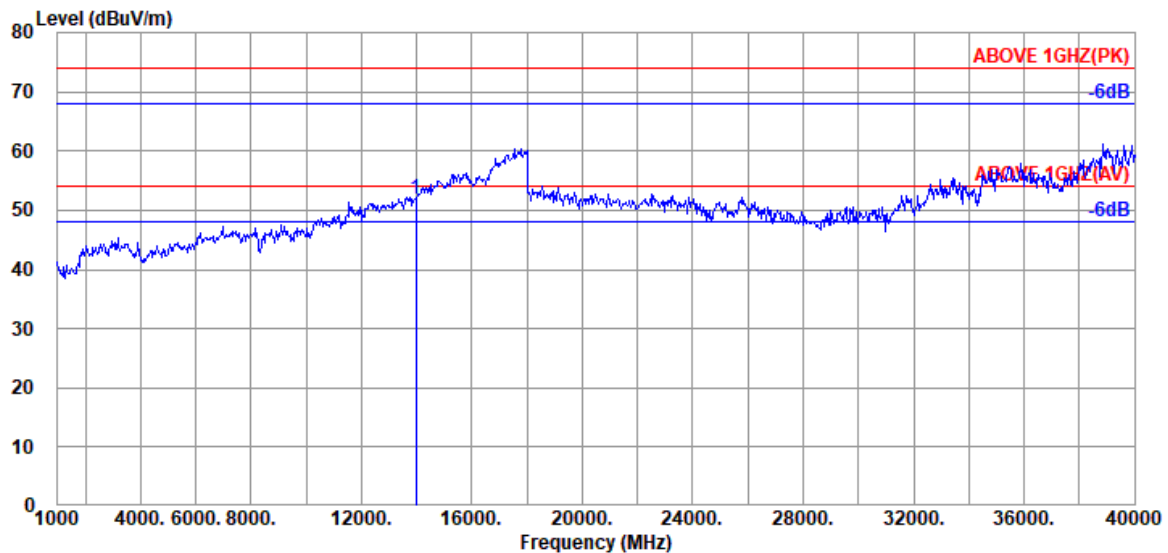

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.60	51.91	54.00	2.09	Peak

Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

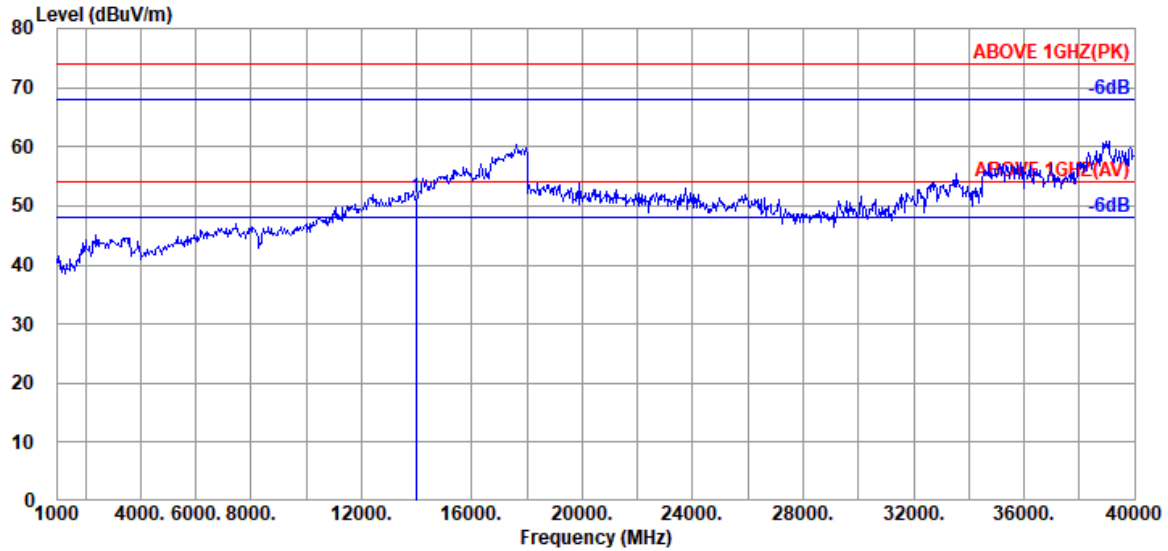

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.15	51.46	54.00	2.54	Peak

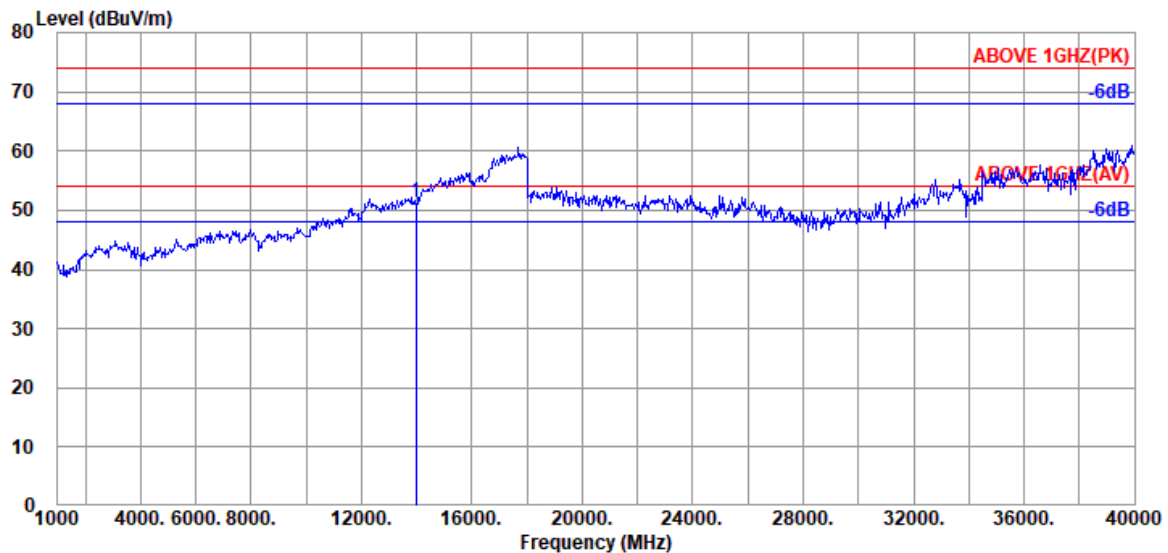

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	40.85	16.63	33.17	27.01	51.32	54.00	2.68	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.