

A.4 MAXIMUM OUTPUT POWER

Test Date	2019/09/20~10/4, 2020/10/30~11/02	Temp./Hum.	23~24°C/47~53%, 23°C/51~55%
Cable Loss	1.5dB	Tested By	Martin Chen/Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Average Output Power

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Max Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11a	NII-I	5180	18.20	18.09	N/A	18.20	0.066	< 250 mW (24 dBm)
		5200	18.86	18.72		18.86	0.077	
		5240	19.89	19.72		19.89	0.097	
	NII-2A	5260	19.96	19.94		19.96	0.099	
		5300	18.98	18.77		18.98	0.079	
		5320	18.26	17.90		18.26	0.067	
	NII-2C	5500	18.49	18.29		18.49	0.071	
		5580	19.92	19.61		19.92	0.098	
		5700	17.75	18.26		18.26	0.067	
		5720	20.01	19.71		20.01	0.100	
	NII-III	5745	19.85	20.08		20.08	0.102	
		5785	19.72	20.01		20.01	0.100	
5825		19.67	19.79	19.79	0.095			
							< 1 W (30 dBm)	

SPOT CHECK

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Max Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11a	NII-I	5180	18.17	18.14	N/A	18.17	0.066	< 250 mW (24 dBm)
		5200	18.87	18.81		18.87	0.077	
		5240	19.81	19.71		19.81	0.096	
	NII-2A	5260	19.91	19.80		19.91	0.098	
		5300	19.00	18.81		19.00	0.079	
		5320	18.19	17.99		18.19	0.066	
	NII-2C	5500	18.53	18.43		18.53	0.071	
		5580	19.98	19.80		19.98	0.100	
		5700	17.77	18.25		18.25	0.067	
		5720	20.06	19.86		20.06	0.101	
	NII-III	5745	19.95	19.97		19.97	0.099	
		5785	19.75	19.94		19.94	0.099	
5825		19.59	19.74	19.74	0.094			
							< 1 W (30 dBm)	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11n-HT20	NII-I	5180	15.58	15.33	N/A	18.47	0.070	< 250 mW (24 dBm)
		5200	16.23	16.04		19.15	0.082	
		5240	17.46	17.18		20.33	0.108	
	NII-2A	5260	17.61	17.49		20.56	0.114	
		5300	16.35	16.07		19.22	0.084	
		5320	15.41	15.19		18.31	0.068	
	NII-2C	5500	15.82	15.55		18.70	0.074	
		5580	17.52	17.29		20.42	0.110	
		5700	15.11	14.57		17.86	0.061	
		5720	17.49	17.21		20.36	0.109	
	NII-III	5745	17.26	17.24		20.26	0.106	
		5785	17.35	17.25		20.31	0.107	
5825		17.28	17.26	20.28	0.107			
802.11n-HT40	NII-I	5190	15.81	15.51	18.67	0.074	< 250 mW (24 dBm)	
		5230	17.35	17.11	20.24	0.106		
	NII-2A	5270	16.69	16.61	19.66	0.092		
		5310	14.78	14.52	17.66	0.058		
	NII-2C	5510	15.10	14.69	17.91	0.062		
		5550	15.89	15.65	18.78	0.076		
		5670	17.35	16.88	20.13	0.103		
		5710	17.98	17.55	20.78	0.120		
	NII-III	5755	17.68	17.65	20.68	0.117		
		5795	17.78	17.74	20.77	0.119		
802.11ac-VHT80	NII-I	5210	16.10	15.75	18.94	0.078	< 250 mW (24 dBm)	
	NII-2A	5290	14.79	14.58	17.70	0.059		
	NII-2C	5530	15.64	15.24	18.45	0.070		
		5610	17.83	17.64	20.75	0.119		
		5690	18.19	17.84	21.03	0.127		
	NII-III	5775	16.50	16.53	19.53	0.090		
802.11ac-VHT160	NII-I/II-2A	5250	11.94	11.84	14.90	0.031	< 250 mW (24 dBm)	
	NII-2C	5570	11.51	11.39	14.46	0.028		

Note: The results have been included cable loss.

SPOT CHECK

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11n-HT20	NII-I	5180	15.55	15.26	N/A	18.42	0.070	< 250 mW (24 dBm)
		5200	16.21	15.99		19.11	0.081	
		5240	17.45	17.08		20.28	0.107	
	NII-2A	5260	17.61	17.52		20.58	0.114	
		5300	16.27	16.14		19.22	0.084	
		5320	15.49	15.14		18.33	0.068	
	NII-2C	5500	15.82	15.44		18.64	0.073	
		5580	17.47	17.20		20.35	0.108	
		5700	15.12	14.57		17.86	0.061	
		5720	17.42	17.18		20.31	0.107	
	NII-III	5745	17.23	17.15		20.20	0.105	
		5785	17.33	17.25		20.30	0.107	
5825		17.32	17.21	20.28	0.107			
802.11n-HT40	NII-I	5190	15.76	15.58	N/A	18.68	0.074	< 250 mW (24 dBm)
		5230	17.26	17.11		20.20	0.105	
	NII-2A	5270	16.65	16.58		19.63	0.092	
		5310	14.72	14.49		17.62	0.058	
	NII-2C	5510	15.12	14.59		17.87	0.061	
		5550	15.91	15.57		18.75	0.075	
		5670	17.46	16.75		20.13	0.103	
	NII-III	5710	17.92	17.53		20.74	0.119	
		5755	17.64	17.54		20.60	0.115	
	5795	17.76	17.65	20.72		0.118		
802.11ac-VHT80	NII-I	5210	16.12	15.56	N/A	18.86	0.077	< 250 mW (24 dBm)
	NII-2A	5290	14.71	14.51		17.62	0.058	
		5530	15.73	15.11		18.44	0.070	
	NII-2C	5610	17.99	17.18		20.61	0.115	
		5690	18.21	17.49		20.88	0.122	
	NII-III	5775	16.56	16.33		19.46	0.088	
802.11ac-VHT160	NII-I/ NII-2A	5250	12.04	11.79	N/A	14.93	0.031	< 250 mW (24 dBm)
	NII-2C	5570	11.68	11.01		14.37	0.027	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	15.51	15.28	N/A	18.41	0.069	< 250 mW (24 dBm)
		5200	16.21	15.95		19.09	0.081	
		5240	17.37	17.22		20.31	0.107	
	NII-2A	5260	17.47	17.44		20.47	0.111	
		5300	16.22	16.01		19.13	0.082	
		5320	15.31	15.06		18.20	0.066	
	NII-2C	5500	15.76	15.46		18.62	0.073	
		5580	17.38	17.27		20.34	0.108	
		5700	15.01	14.45		17.75	0.060	
		5720	17.36	17.12		20.25	0.106	
	NII-III	5745	17.10	17.07		20.10	0.102	
		5785	17.22	17.16		20.20	0.105	
5825		17.17	17.13	20.16	0.104	< 1 W (30 dBm)		
802.11ax-HE40	NII-I	5190	15.59	15.37	18.49	0.071	< 250 mW (24 dBm)	
		5230	17.11	16.94	20.04	0.101		
	NII-2A	5270	16.45	16.32	19.40	0.087		
		5310	14.47	14.26	17.38	0.055		
	NII-2C	5510	14.87	14.47	17.68	0.059		
		5550	15.67	15.44	18.57	0.072		
		5670	17.03	16.61	19.84	0.096		
		5710	17.73	17.30	20.53	0.113		
	NII-III	5755	17.41	17.34	20.39	0.109		
		5795	17.52	17.43	20.49	0.112	< 1 W (30 dBm)	
802.11ax-HE80	NII-I	5210	15.55	15.57	18.57	0.072	< 250 mW (24 dBm)	
	NII-2A	5290	14.33	14.34	17.35	0.054		
	NII-2C	5530	15.28	15.01	18.16	0.065		
		5610	17.71	17.47	20.60	0.115		
		5690	17.98	17.62	20.81	0.121		
	NII-III	5775	16.20	16.27	19.25	0.084	< 1 W (30 dBm)	
802.11ax-HE160	NII-I/ NII-2A	5250	11.65	11.58	14.63	0.029	< 250 mW (24 dBm)	
	NII-2C	5570	11.23	11.15	14.20	0.026		

Note: The results have been included cable loss.

SPOT CHECK

Mode	Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	15.38	15.10	N/A	18.25	0.067	< 250 mW (24 dBm)
		5200	16.22	16.06		19.15	0.082	
		5240	17.35	17.20		20.29	0.107	
	NII-2A	5260	17.50	17.35		20.44	0.111	
		5300	16.24	16.04		19.15	0.082	
		5320	15.30	15.23		18.28	0.067	
	NII-2C	5500	15.71	15.32		18.53	0.071	
		5580	17.23	16.57		19.92	0.098	
		5700	15.08	14.38		17.75	0.060	
		5720	17.21	17.12		20.18	0.104	
	NII-III	5745	17.01	17.17		20.10	0.102	
		5785	17.24	17.09		20.18	0.104	
5825		17.22	17.06	20.15	0.104			
802.11ax-HE40	NII-I	5190	15.49	14.76	N/A	18.15	0.065	< 250 mW (24 dBm)
		5230	17.13	16.60		19.88	0.097	
	NII-2A	5270	16.33	16.11		19.23	0.084	
		5310	14.40	14.10		17.26	0.053	
	NII-2C	5510	14.89	13.97		17.46	0.056	
		5550	15.67	15.37		18.53	0.071	
		5670	17.10	16.04		19.61	0.091	
		5710	17.62	16.88		20.28	0.107	
	NII-III	5755	17.43	16.93		20.20	0.105	
		5795	17.43	17.09		20.27	0.106	
802.11ax-HE80	NII-I	5210	15.75	15.39	N/A	18.58	0.072	< 250 mW (24 dBm)
	NII-2A	5290	14.33	14.26		17.31	0.054	
		5530	15.18	14.96		18.08	0.064	
	NII-2C	5610	17.68	16.87		20.30	0.107	
		5690	18.01	17.22		20.64	0.116	
	NII-III	5775	16.23	15.92		19.09	0.081	
802.11ax-HE160	NII-I/ NII-2A	5250	11.74	11.30	N/A	14.54	0.028	< 250 mW (24 dBm)
	NII-2C	5570	11.17	11.05		14.12	0.026	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	26/0	11.43	11.18	N/A	14.32	0.027	< 250 mW (24 dBm)
			52/37	14.45	14.25		17.36	0.054	
			106/53	15.68	15.46		18.58	0.072	
	NII-2A	5320	26/8	11.82	11.63		14.74	0.030	
			52/40	12.06	11.92		15.00	0.032	
			106/54	15.55	15.35		18.46	0.070	
	NII-2C	5500	26/0	11.74	11.43		14.60	0.029	
			52/37	14.76	14.48		17.63	0.058	
			106/53	15.78	15.64		18.72	0.074	
		5700	26/8	11.89	11.42		14.67	0.029	
			52/40	13.06	12.59		15.84	0.038	
			106/54	14.72	14.17		17.46	0.056	
	NII-III	5745	26/0	11.58	11.45		14.53	0.028	
			52/37	14.60	14.54		17.58	0.057	
			106/53	17.17	17.15		20.17	0.104	
5825		26/8	16.65	16.42	19.55	0.090			
		52/40	16.86	16.68	19.78	0.095			
		106/54	16.96	16.64	19.81	0.096			
802.11ax-HE40	NII-I	5190	242/61	15.42	15.34	18.39	0.069	< 250 mW (24 dBm)	
	NII-2A	5310	242/62	14.59	14.36	17.49	0.056		
	NII-2C	5510	242/61	15.05	14.75	17.91	0.062		
		5670	242/62	16.98	16.64	19.82	0.096		
	NII-III	5755	242/61	17.03	17.02	20.04	0.101	< 1 W (30 dBm)	
		5795	242/62	16.98	16.96	19.98	0.100		

Note: The results have been included cable loss.

SPOT CHECK

Mode	Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	26/0	11.54	10.93	N/A	14.26	0.027	< 250 mW (24 dBm)
			52/37	14.52	14.23		17.39	0.055	
			106/53	15.27	15.83		18.57	0.072	
	NII-2A	5320	26/8	11.68	11.64		14.67	0.029	
			52/40	11.94	11.85		14.91	0.031	
			106/54	15.17	15.73		18.47	0.070	
	NII-2C	5500	26/0	11.79	11.32		14.57	0.029	
			52/37	14.80	14.38		17.61	0.058	
			106/53	15.88	15.43		18.67	0.074	
		5700	26/8	11.99	11.16		14.61	0.029	
			52/40	13.18	12.36		15.80	0.038	
			106/54	14.72	14.09		17.43	0.055	
	NII-III	5745	26/0	11.63	11.27		14.46	0.028	
			52/37	14.67	14.20		17.45	0.056	
			106/53	17.09	16.87		19.99	0.100	
		5825	26/8	14.88	14.87		17.89	0.062	
52/40			16.70	16.78	19.75	0.094			
106/54			16.73	16.70	19.73	0.094			
802.11ax-HE40	NII-I	5190	242/61	15.57	14.99	18.30	0.068	< 250 mW (24 dBm)	
	NII-2A	5310	242/62	14.01	14.78	17.42	0.055		
	NII-2C	5510	242/61	14.84	14.72	17.79	0.060		
		5670	242/62	17.14	16.35	19.77	0.095		
	NII-III	5755	242/61	16.95	17.02	20.00	0.100		
		5795	242/62	16.80	16.73	19.78	0.095	< 1 W (30 dBm)	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE80	NII-I	5210	484/65	15.21	15.47	N/A	18.35	0.068	< 250 mW (24 dBm)
	NII-2A	5290	484/66	12.33	11.76		15.06	0.032	
	NII-2C	5530	484/65	13.85	13.53		16.70	0.047	
		5610	484/66	15.78	15.62		18.71	0.074	
	NII-III	5775	484/65	15.39	16.22		18.84	0.077	< 1 W (30 dBm)
			484/66	15.71	15.45		18.59	0.072	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	10.75	10.59	N/A	13.68	0.023	< 250 mW (24 dBm)
			996/S67	10.47	10.34		13.42	0.022	
	NII-2C	5570	996/67	10.14	9.53		12.86	0.019	
			996/S67	9.90	9.71		12.82	0.019	

Note: The results have been included cable loss.

SPOT CHECK


Mode	Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE80	NII-I	5210	484/65	15.49	14.97	N/A	18.25	0.067	< 250 mW (24 dBm)
	NII-2A	5290	484/66	11.92	12.00		14.97	0.031	
	NII-2C	5530	484/65	14.02	13.29		16.68	0.047	
		5610	484/66	16.07	15.29		18.71	0.074	
	NII-III	5775	484/65	15.94	15.58		18.77	0.075	< 1 W (30 dBm)
			484/66	15.65	15.35		18.51	0.071	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	10.90	10.38	N/A	13.66	0.023	< 250 mW (24 dBm)
			996/S67	10.37	10.42		13.41	0.022	
	NII-2C	5570	996/67	10.00	9.47		12.75	0.019	
			996/S67	10.29	9.17		12.78	0.019	


Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

A.4.2 Measurement Plots


SPOT CHECK

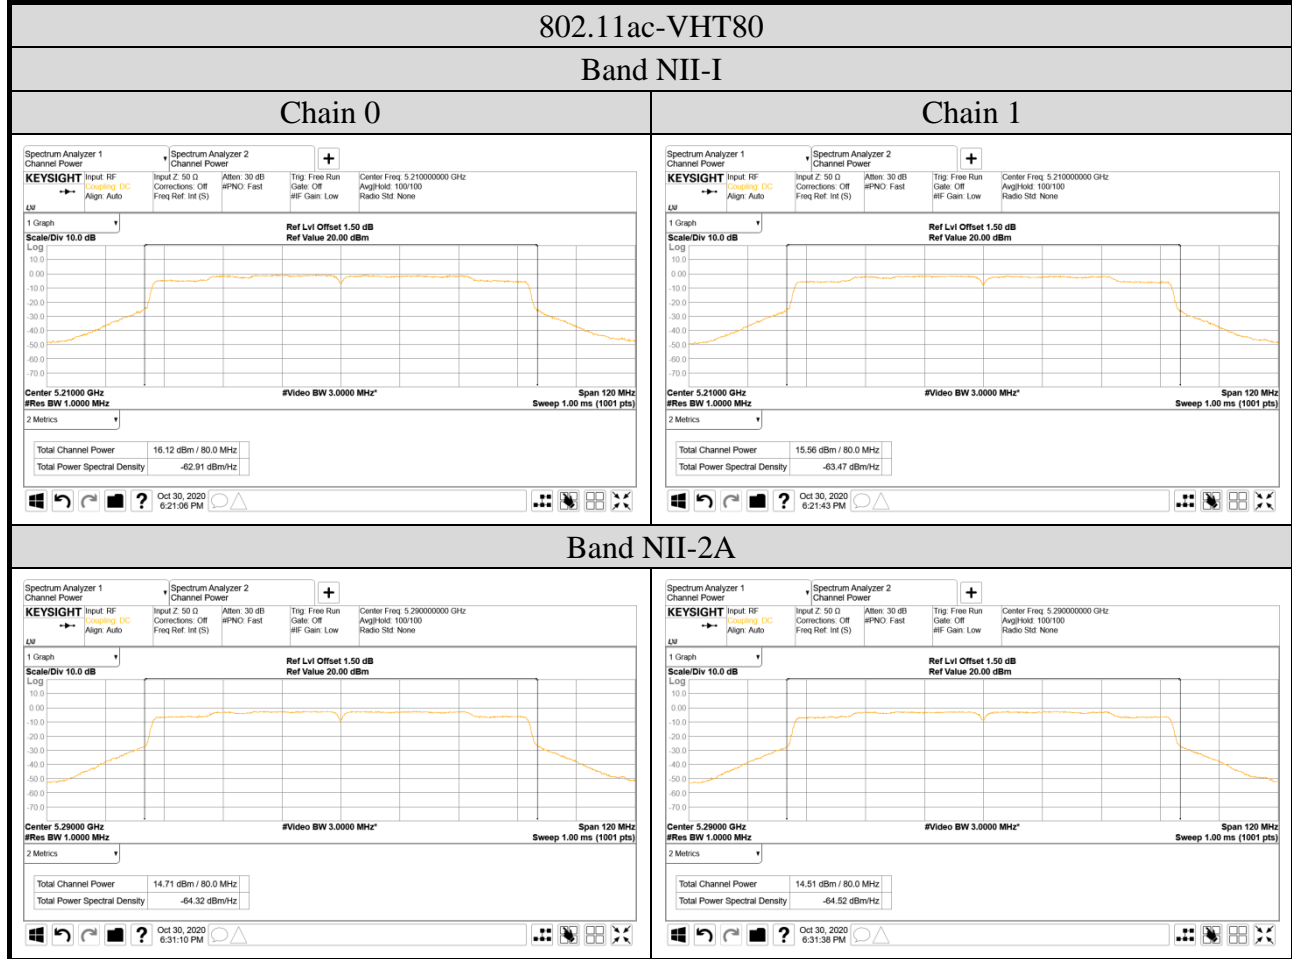

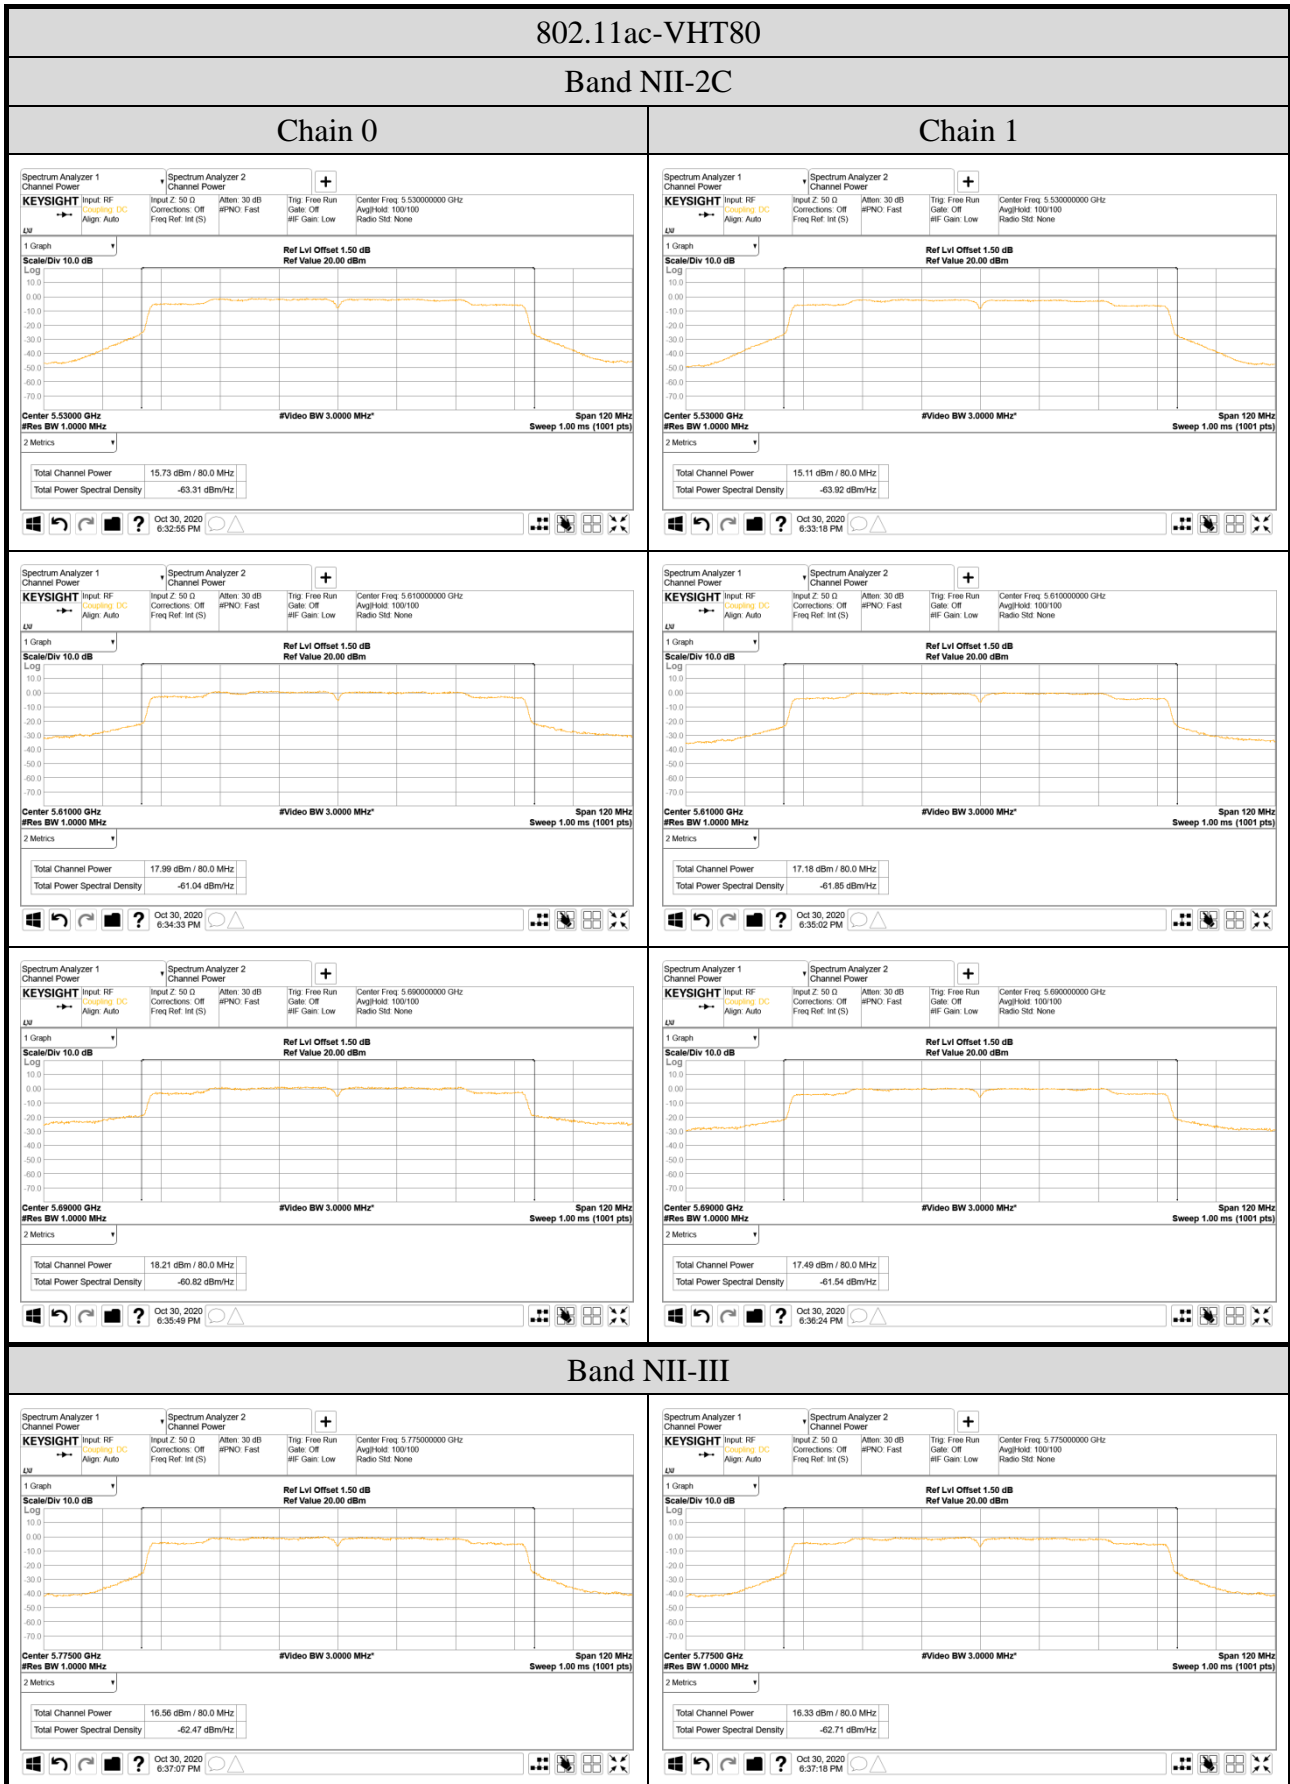


Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

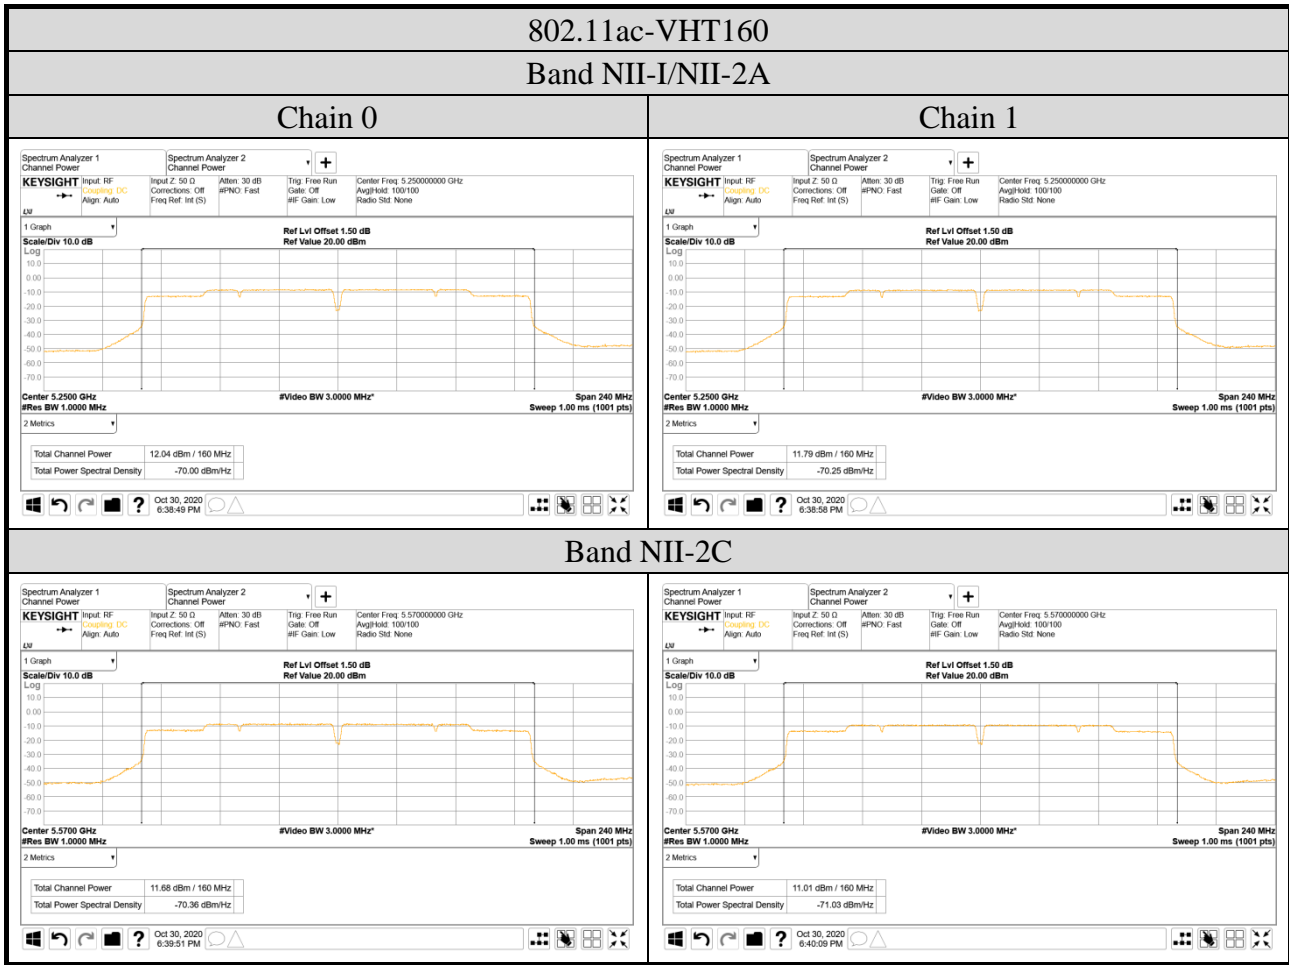



Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

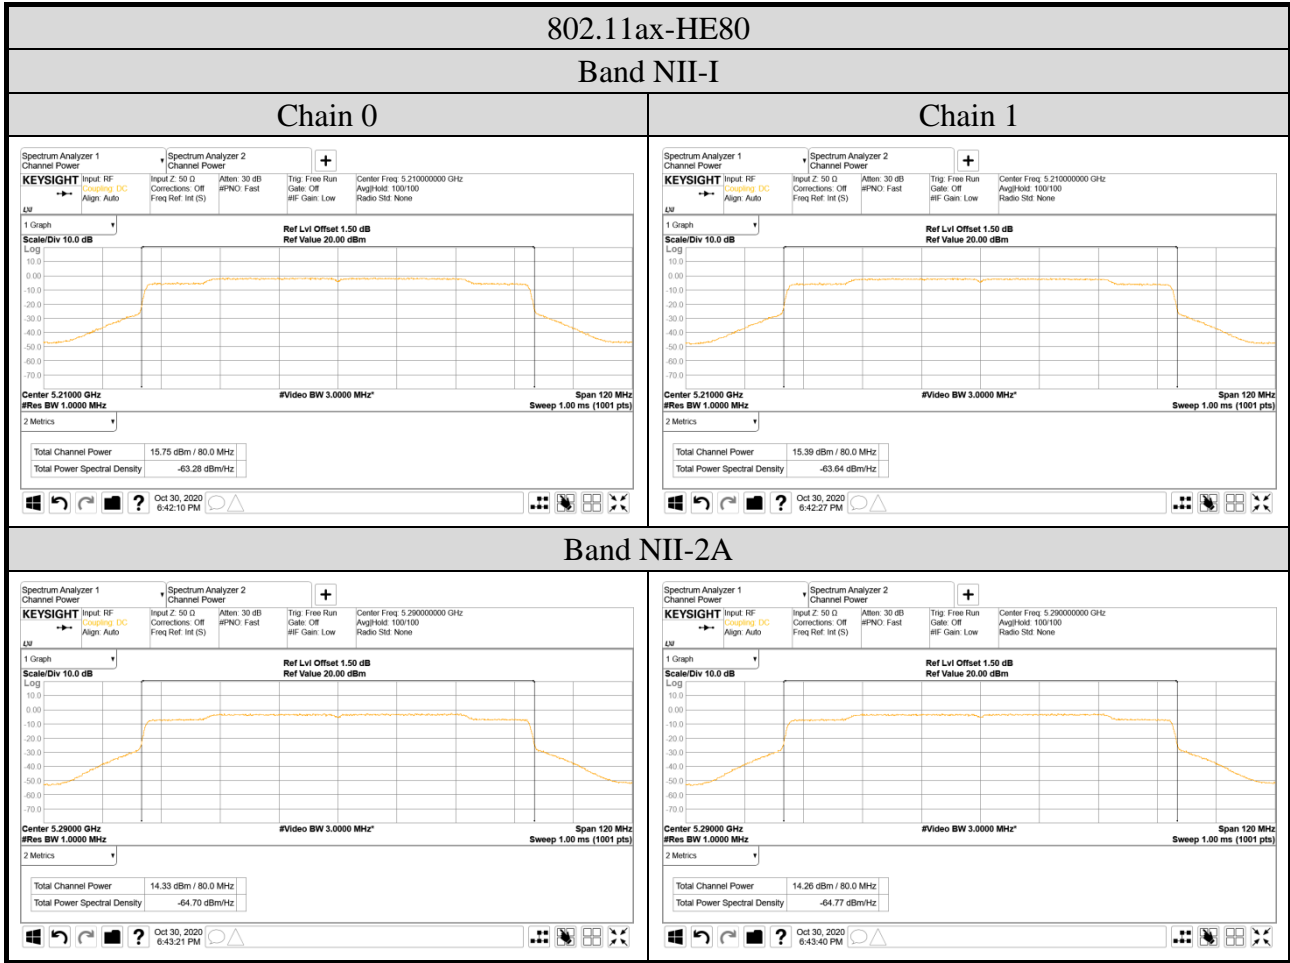

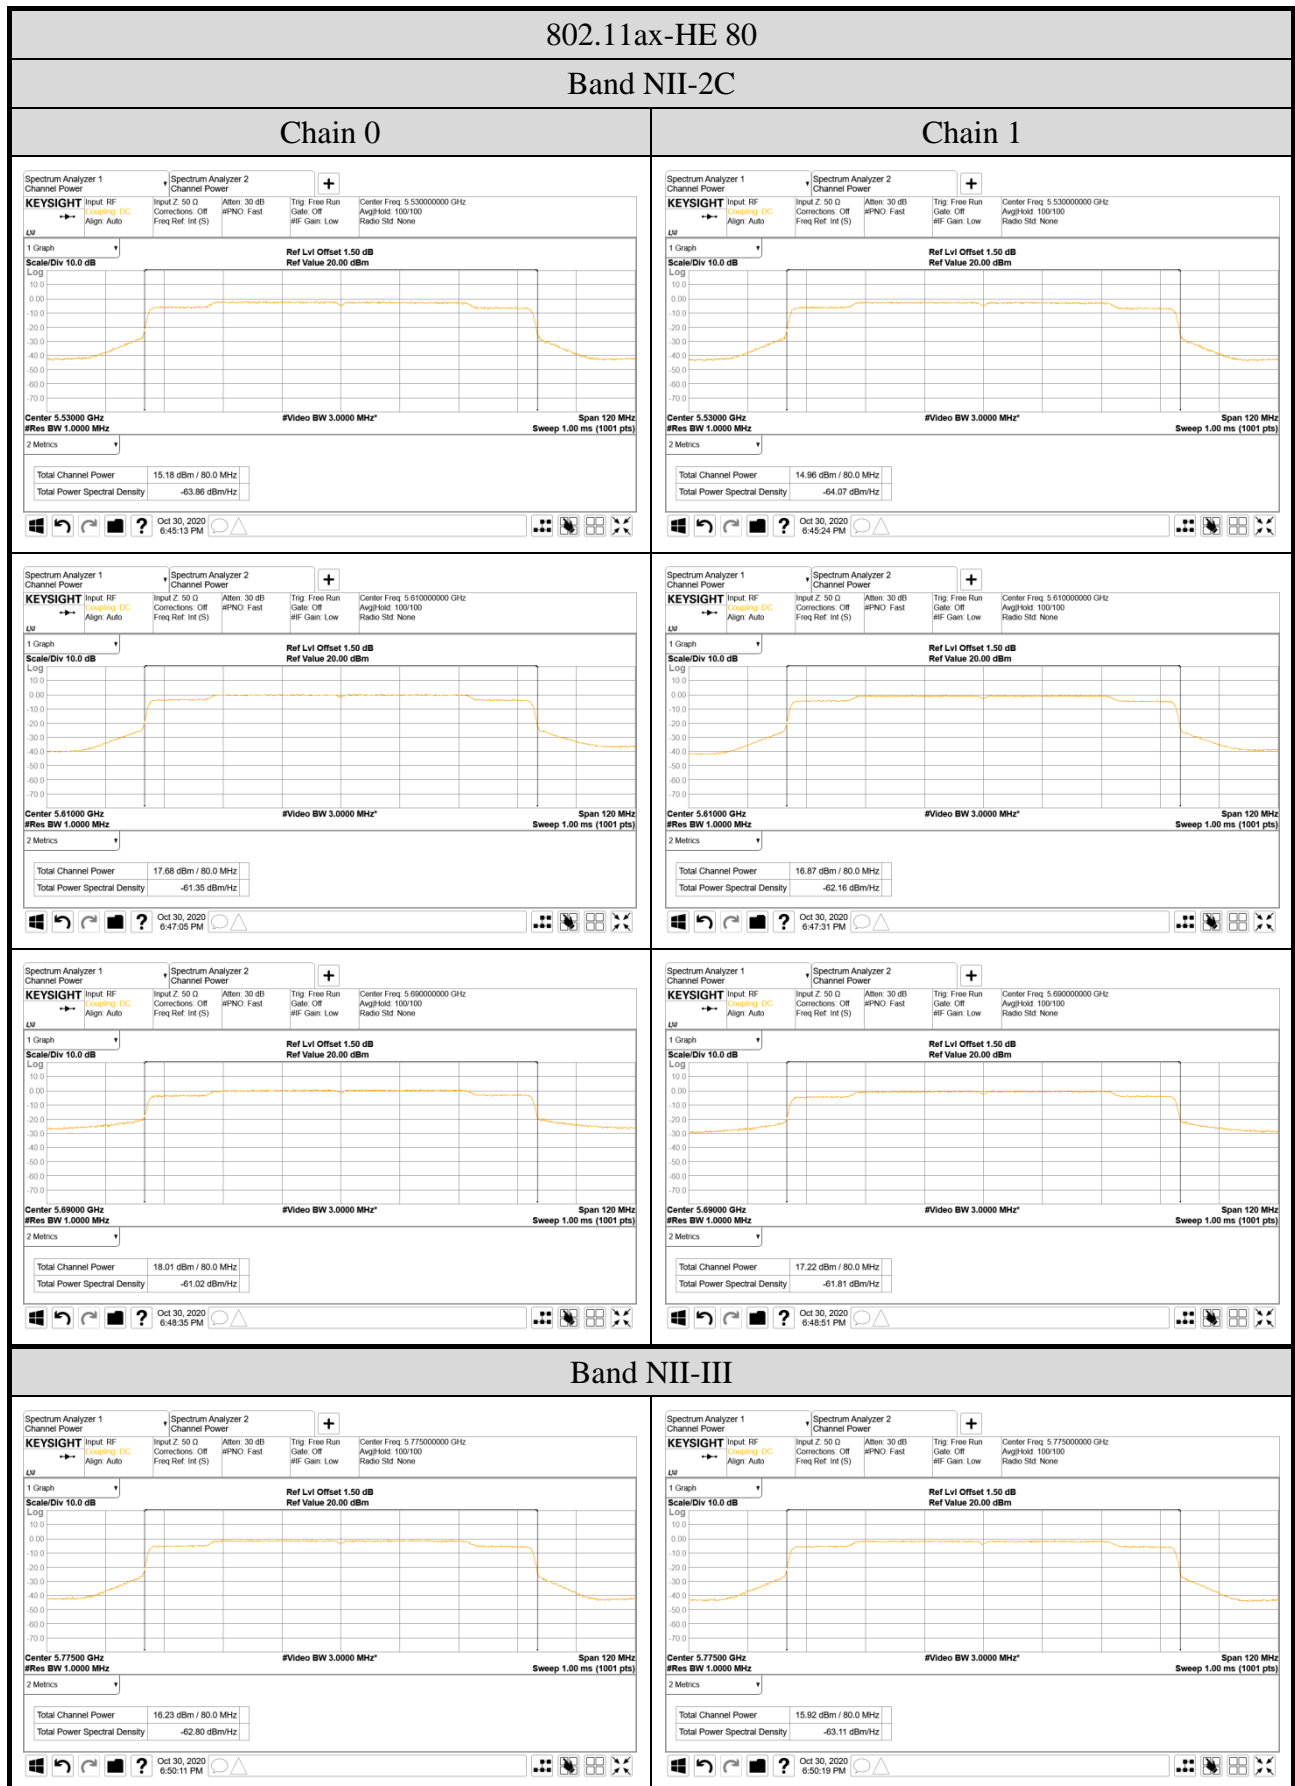

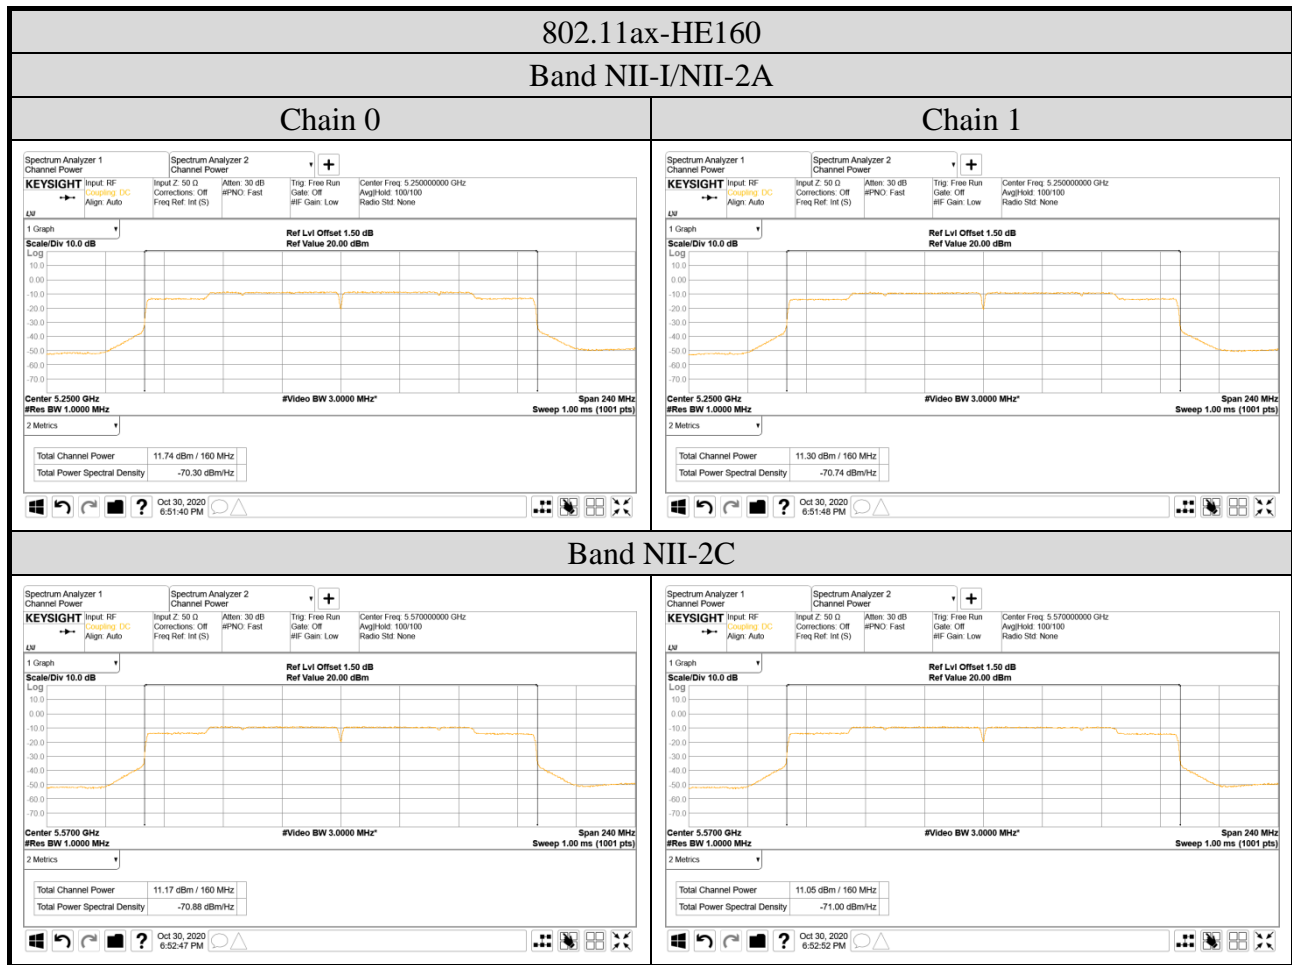

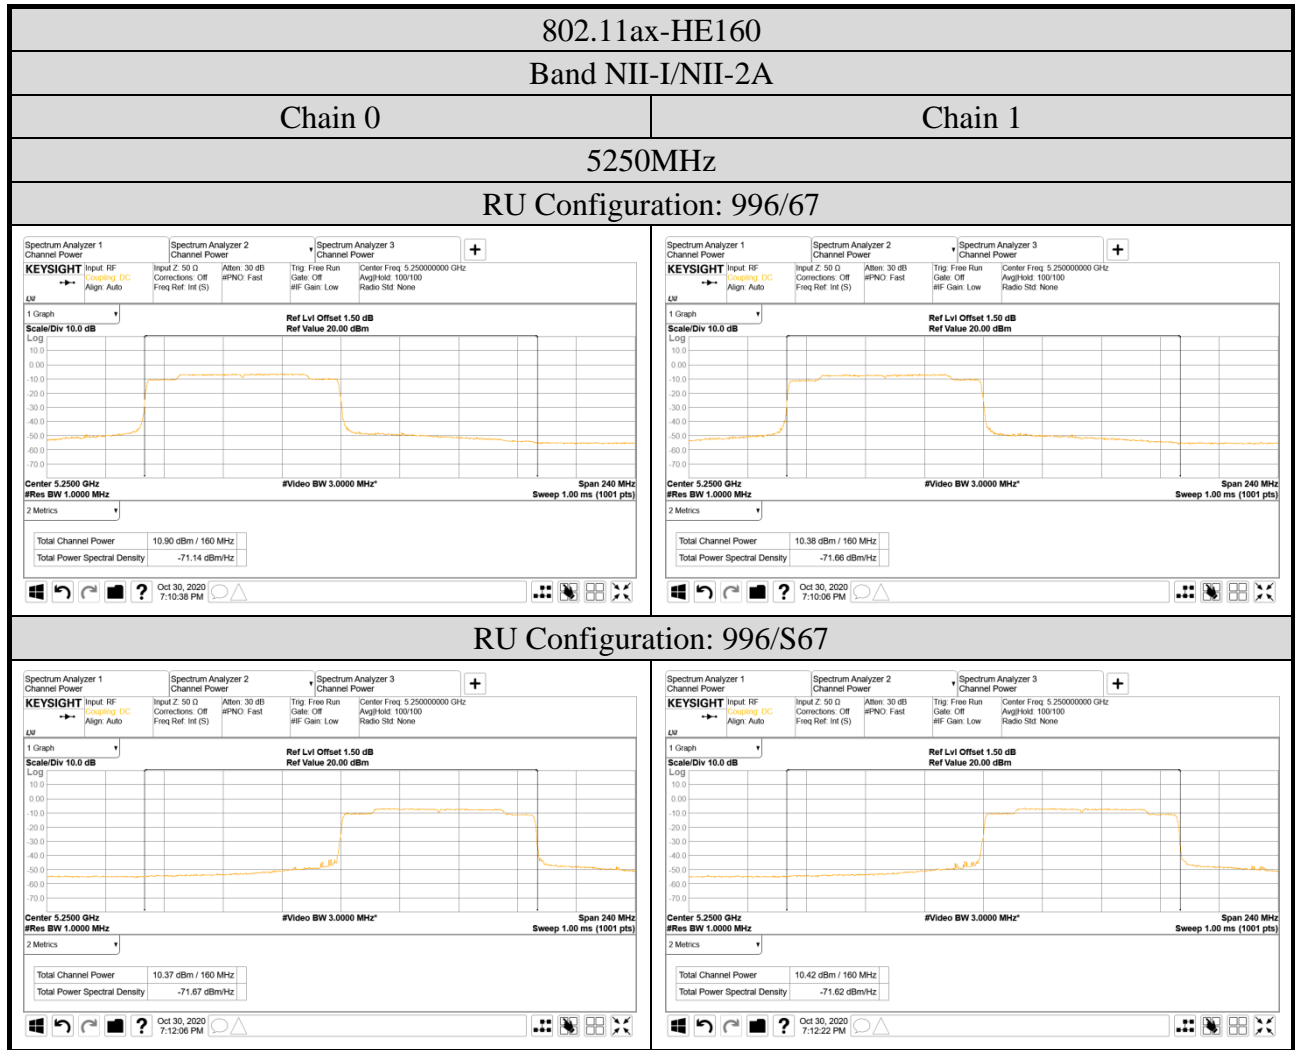

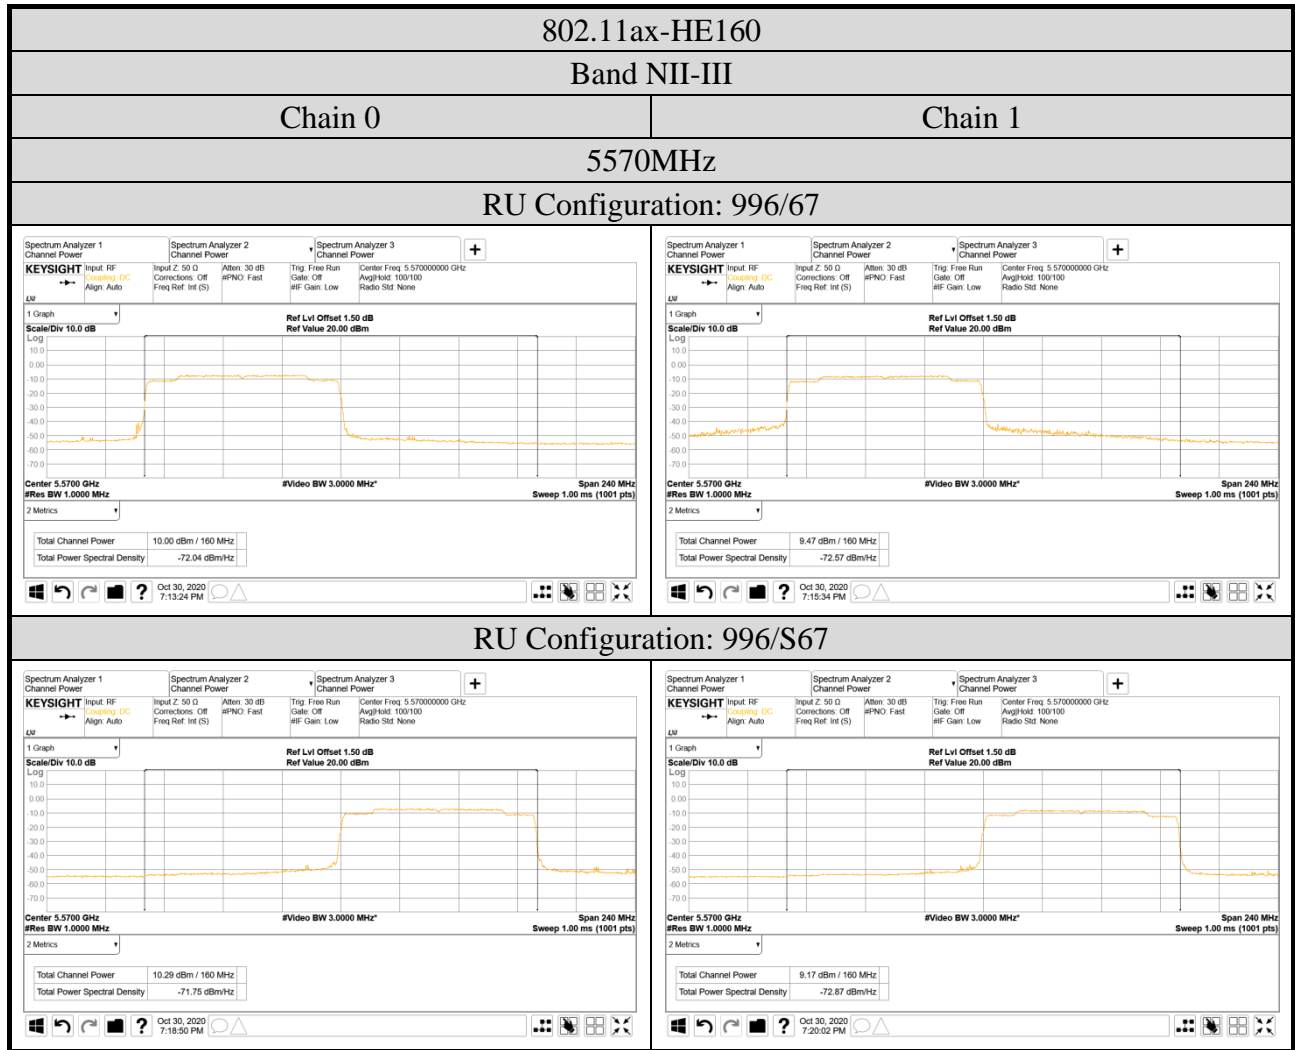

A.5 POWER SPECTRAL DENSITY

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/47~53%
Cable Loss	1dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)	802.11a: 0 802.11n-HT20/40: 3 802.11ac-VHT80/160: 3 802.11ax-HE80/160: 3		

A.5.1 Power Spectral Density Result

Mode	Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11a	NII-I	5180	7.304	11 dBm/MHz
		5200	8.070	
		5240	8.864	
	NII-2A	5260	8.770	
		5300	7.407	
		5320	6.531	
	NII-2C	5500	6.744	
		5580	8.860	
		5700	6.507	
	NII-III ^{Note2}	5720	8.838	
		5745	6.604	30dBm/500 kHz
		5785	6.672	
5825	6.616			

Note 1: All results have been included cable loss and Simultaneous Factor and correct duty factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11n-HT20	NII-I	5180	7.207	11 dBm/MHz
		5200	7.751	
		5240	8.948	
	NII-2A	5260	9.014	
		5300	7.552	
		5320	6.079	
	NII-2C	5500	6.477	
		5580	8.936	
		5700	6.287	
		5720	8.803	
	NII-III ^{Note2}	5745	6.562	30dBm/500 kHz
5785		7.103		
5825		6.825		
802.11n-HT40	NII-I	5190	4.124	11 dBm/MHz
		5230	5.601	
	NII-2A	5270	4.613	
		5310	2.175	
	NII-2C	5510	2.677	
		5550	3.714	
		5670	5.746	
	NII-III ^{Note2}	5710	6.437	
		5755	3.771	30dBm/500 kHz
	5795	3.783		
802.11ac-VHT80	NII-I	5210	1.109	11 dBm/MHz
	NII-2A	5290	-0.078	
		5530	1.630	
	NII-2C	5610	3.978	
		5690	1.682	
	NII-III ^{Note2}	5775	-0.372	30dBm/500 kHz
802.11ac-VHT160	NII-I/NII-2A	5250	-5.753	11 dBm/MHz
	NII-2C	5570	-5.638	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11ax-HE20	NII-I	5180	6.955	11 dBm/MHz
		5200	7.579	
		5240	8.661	
	NII-2A	5260	9.004	
		5300	6.932	
		5320	6.014	
	NII-2C	5500	6.177	
		5580	8.680	
		5700	6.106	
		5720	8.779	
NII-III ^{Note2}	5745	5.230	30dBm/500 kHz	
	5785	5.201		
	5825	5.344		
802.11ax-HE40	NII-I	5190	3.664	11 dBm/MHz
		5230	5.246	
	NII-2A	5270	4.226	
		5310	1.608	
	NII-2C	5510	2.252	
		5550	3.309	
		5670	5.314	
	NII-III ^{Note2}	5710	5.871	
		5755	2.431	30dBm/500 kHz
		5795	2.550	
802.11ax-HE80	NII-I	5210	0.831	11 dBm/MHz
	NII-2A	5290	-0.441	
		5530	1.185	
	NII-2C	5610	3.570	
		5690	3.682	
	NII-III ^{Note2}	5775	-1.398	30dBm/500 kHz
802.11ax-HE160	NII-I/NII-2A	5250	-6.145	11 dBm/MHz
	NII-2C	5570	-6.191	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm)	Limit
802.11ax-HE20	NII-I	5180	26/0	10.204	11 dBm/MHz
			52/37	10.844	
			106/53	9.840	
	NII-2A	5320	26/8	10.090	
			52/40	7.383	
			106/54	8.675	
	NII-2C	5500	26/0	10.522	
			52/37	10.852	
			106/53	9.587	
		5700	26/8	9.841	
			52/40	8.772	
			106/54	8.214	
NII-III ^{Note2}	5745	26/0	7.675	30dBm/500 kHz	
		52/37	7.773		
		106/53	7.986		
	5825	26/8	13.528		
		52/40	10.901		
106/54	8.154				
802.11ax-HE40	NII-I	5190	242/61	6.586	11 dBm/MHz
	NII-2A	5310	242/62	4.462	
	NII-2C	5510	242/61	5.450	
		5670	242/62	6.834	
	NII-III ^{Note2}	5755	242/61	4.064	30dBm/500 kHz
		5795	242/62	4.563	
802.11ax-HE80	NII-I	5210	484/65	3.093	11 dBm/MHz
	NII-2A	5290	484/66	1.752	
	NII-2C	5530	484/65	2.010	
		5610	484/66	4.301	
	NII-III ^{Note2}	5775	484/65	0.411	30dBm/500 kHz
			484/66	0.620	
802.11ax-HE160	NII-I/NII-2A	5250	996/67	-3.198	11 dBm/MHz
			996/S67	-3.453	
	NII-2C	5570	996/67	-4.063	
			996/S67	-3.809	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

A.5.2 Measurement Plots

