

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	93
A.2.3 Emissions in Non-restricted Frequency Bands:.....	96
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>97</b>
A.3.1 DTS/Occupied Bandwidth Result.....	97
A.3.2 Measurement Plots .....	99
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>111</b>
A.4.1 Peak Output Power .....	111
A.4.2 Average Output Power (Reporting only).....	123
A.4.3 Measurement Plots .....	132
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>134</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>161</b>
A.6.1 Power Spectral Density Result .....	161
A.6.2 Measurement Plots .....	163

## A.1 CONDUCTED EMISSION

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90Q

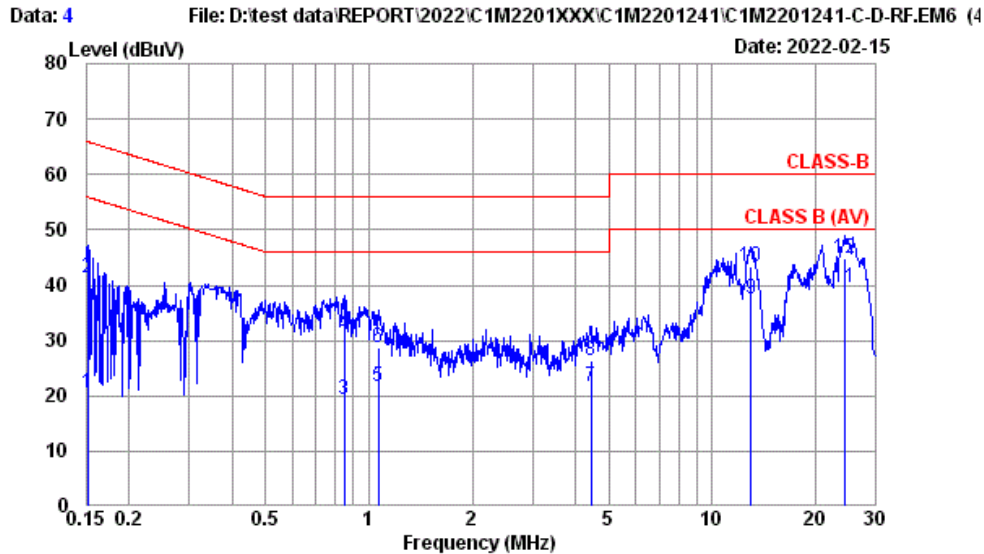


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 23°C / 60%	Engineer	: Chucky Chiu
EUT Model	: 17Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating INPAQ		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	0.24	20.53	55.91	35.38	Average
2	0.152	10.41	0.03	9.85	21.14	41.43	65.91	24.48	QP
3	0.848	10.38	0.04	9.85	-0.84	19.43	46.00	26.57	Average
4	0.848	10.38	0.04	9.85	10.76	31.03	56.00	24.97	QP
5	1.065	10.38	0.04	9.85	1.43	21.70	46.00	24.30	Average
6	1.065	10.38	0.04	9.85	8.31	28.58	56.00	27.42	QP
7	4.430	10.47	0.09	9.86	1.21	21.63	46.00	24.37	Average
8	4.430	10.47	0.09	9.86	5.89	26.31	56.00	29.69	QP
9	12.988	10.84	0.16	9.90	16.72	37.62	50.00	12.38	Average
10	12.988	10.84	0.16	9.90	22.44	43.34	60.00	16.66	QP
11	24.271	11.23	0.22	9.97	18.06	39.48	50.00	10.52	Average
12	24.271	11.23	0.22	9.97	23.46	44.88	60.00	15.12	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90Q

Data: 3 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF-EM6 (4) Date: 2022-02-15

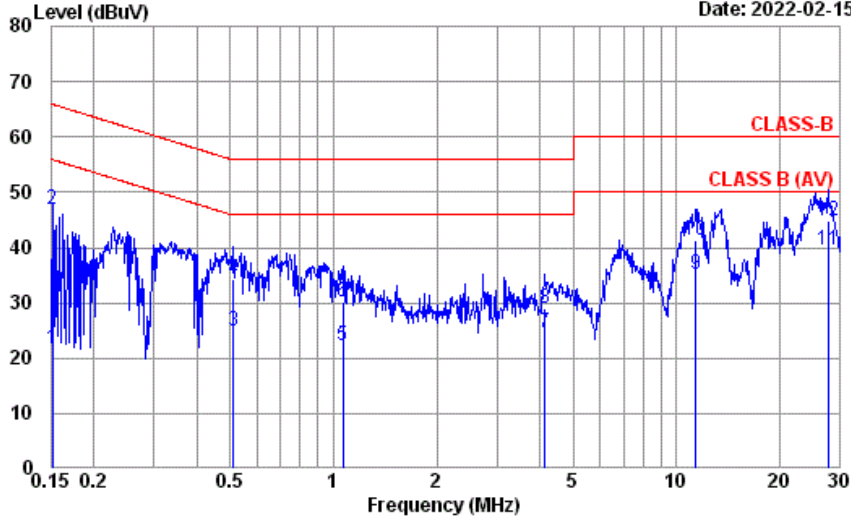


Site No. : No.8 Shielded Room Data No. : 3  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : LINE  
 Environment : 23°C / 60% Engineer : Chucky Chiu  
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	1.51	21.79	55.91	34.12	Average
2	0.152	10.40	0.03	9.85	26.57	46.85	65.91	19.06	QP
3	0.510	10.37	0.03	9.85	4.54	24.79	46.00	21.21	Average
4	0.510	10.37	0.03	9.85	14.18	34.43	56.00	21.57	QP
5	1.065	10.38	0.04	9.85	1.95	22.22	46.00	23.78	Average
6	1.065	10.38	0.04	9.85	9.87	30.14	56.00	25.86	QP
7	4.136	10.42	0.09	9.86	4.26	24.63	46.00	21.37	Average
8	4.136	10.42	0.09	9.86	8.55	28.92	56.00	27.08	QP
9	11.377	10.60	0.15	9.90	14.56	35.21	50.00	14.79	Average
10	11.377	10.60	0.15	9.90	20.74	41.39	60.00	18.61	QP
11	27.708	10.85	0.23	9.99	18.48	39.55	50.00	10.45	Average
12	27.708	10.85	0.23	9.99	23.75	44.82	60.00	15.18	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90Q

Data: 1 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF-EM6 (4) Date: 2022-02-15

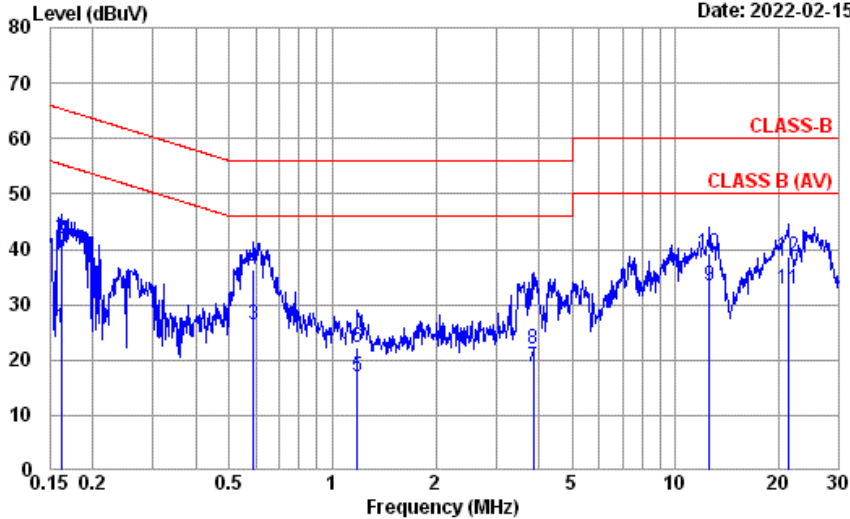


Site No. : No.8 Shielded Room Data No. : 1  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : NEUTRAL  
 Environment : 23°C / 60% Engineer : Chucky Chiu  
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	5.63	25.91	55.38	29.47	Average
2	0.162	10.40	0.03	9.85	21.66	41.94	65.38	23.44	QP
3	0.589	10.37	0.03	9.85	6.07	26.32	46.00	19.68	Average
4	0.589	10.37	0.03	9.85	16.16	36.41	56.00	19.59	QP
5	1.184	10.39	0.04	9.85	-3.41	16.87	46.00	29.13	Average
6	1.184	10.39	0.04	9.85	1.91	22.19	56.00	33.81	QP
7	3.860	10.45	0.09	9.86	-1.61	18.79	46.00	27.21	Average
8	3.860	10.45	0.09	9.86	1.43	21.83	56.00	34.17	QP
9	12.582	10.82	0.15	9.90	12.66	33.53	50.00	16.47	Average
10	12.582	10.82	0.15	9.90	18.41	39.28	60.00	20.72	QP
11	21.260	11.14	0.20	9.95	11.51	32.80	50.00	17.20	Average
12	21.260	11.14	0.20	9.95	17.25	38.54	60.00	21.46	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90Q

Data: 2 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF.EM6 (4 Date: 2022-02-15

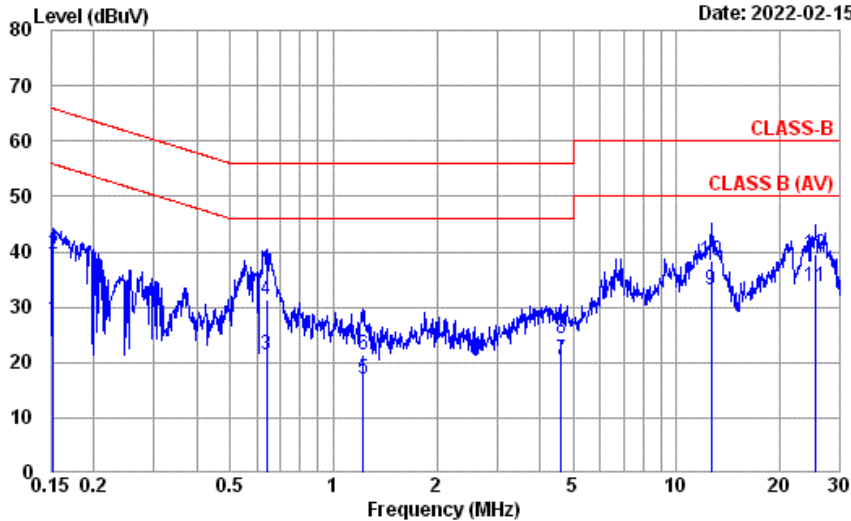

Site No. : No.8 Shielded Room Data No. : 2  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : LINE  
 Environment : 23°C / 60% Engineer : Chucky Chiu  
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	7.69	27.97	55.87	27.90	Average
2	0.152	10.40	0.03	9.85	19.28	39.56	65.87	26.31	QP
3	0.637	10.38	0.04	9.85	1.18	21.45	46.00	24.55	Average
4	0.637	10.38	0.04	9.85	11.23	31.50	56.00	24.50	QP
5	1.223	10.39	0.04	9.85	-3.26	17.02	46.00	28.98	Average
6	1.223	10.39	0.04	9.85	1.01	21.29	56.00	34.71	QP
7	4.598	10.44	0.10	9.87	0.13	20.54	46.00	25.46	Average
8	4.598	10.44	0.10	9.87	3.94	24.35	56.00	31.65	QP
9	12.649	10.63	0.16	9.90	12.51	33.20	50.00	16.80	Average
10	12.649	10.63	0.16	9.90	17.77	38.46	60.00	21.54	QP
11	25.456	10.83	0.22	9.97	12.66	33.68	50.00	16.32	Average
12	25.456	10.83	0.22	9.97	18.55	39.57	60.00	20.43	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## A.2 RADIATED EMISSION

Test Date	2022/01/17 ~ 02/14	Temp./Hum.	19 ~ 21°C/58 ~ 68%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

##### ● Test SKU #1 (with INPAQ Antenna)

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	43.08	35.11	40.00	4.89	Peak
215.270	16.12	3.53	32.24	44.57	31.98	43.50	11.52	Peak
317.120	19.50	4.53	32.25	48.15	39.93	46.00	6.07	Peak
593.570	24.23	6.75	32.31	37.72	36.39	46.00	9.61	Peak
888.450	26.26	8.37	31.53	40.15	43.25	46.00	2.75	Peak
968.960	26.88	8.81	30.81	30.84	35.72	54.00	18.28	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	44.66	36.69	40.00	3.31	Peak
126.030	17.66	2.59	32.31	45.96	33.90	43.50	9.60	Peak
423.820	21.83	5.77	32.23	45.94	41.31	46.00	4.69	Peak
593.570	24.23	6.75	32.31	37.93	36.60	46.00	9.40	Peak
888.450	26.26	8.37	31.53	37.82	40.92	46.00	5.08	Peak
967.020	26.85	8.79	30.89	30.82	35.57	54.00	18.43	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.86	1.22	32.43	42.09	33.74	40.00	6.26	Peak
215.270	16.12	3.53	32.24	44.83	32.24	43.50	11.26	Peak
423.820	21.83	5.77	32.23	43.29	38.66	46.00	7.34	Peak
593.570	24.23	6.75	32.31	39.35	38.02	46.00	7.98	Peak
888.450	26.26	8.37	31.53	36.17	39.27	46.00	6.73	Peak
967.990	26.88	8.81	30.89	28.95	33.75	54.00	20.25	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	41.98	34.01	40.00	5.99	Peak
125.060	17.71	2.58	32.31	46.24	34.22	43.50	9.28	Peak
423.820	21.83	5.77	32.23	44.54	39.91	46.00	6.09	Peak
593.570	24.23	6.75	32.31	37.48	36.15	46.00	9.85	Peak
887.480	26.26	8.37	31.53	35.85	38.95	46.00	7.05	Peak
966.050	26.85	8.79	30.89	30.62	35.37	54.00	18.63	Peak



● Test SKU #2 (with LUXSHARE-ICT Antenna)

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
78.500	12.78	2.01	32.37	45.37	27.79	40.00	12.21	Peak
214.300	16.07	3.52	32.24	44.59	31.94	43.50	11.56	Peak
423.820	21.83	5.77	32.23	46.84	42.21	46.00	3.79	Peak
677.960	24.68	7.17	32.13	43.05	42.77	46.00	3.23	Peak
847.710	26.12	8.12	31.71	41.12	43.65	46.00	2.35	Peak
963.140	26.83	8.78	30.89	28.83	33.55	54.00	20.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.86	1.22	32.43	44.24	35.89	40.00	4.11	Peak
120.210	17.96	2.53	32.32	42.09	30.26	43.50	13.24	Peak
423.820	21.83	5.77	32.23	46.51	41.88	46.00	4.12	Peak
677.960	24.68	7.17	32.13	42.02	41.74	46.00	4.26	Peak
847.710	26.12	8.12	31.71	37.20	39.73	46.00	6.27	Peak
999.030	27.13	8.97	30.57	29.51	35.04	54.00	18.96	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
79.470	12.86	2.02	32.37	45.23	27.74	40.00	12.26	Peak
152.220	16.17	2.88	32.28	44.71	31.48	43.50	12.02	Peak
423.820	21.83	5.77	32.23	47.18	42.55	46.00	3.45	Peak
677.960	24.68	7.17	32.13	42.78	42.50	46.00	3.50	Peak
847.710	26.12	8.12	31.71	41.15	43.68	46.00	2.32	Peak
984.480	27.02	8.90	30.73	29.43	34.62	54.00	19.38	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	32.43	42.60	33.93	40.00	6.07	Peak
120.210	17.96	2.53	32.32	43.10	31.27	43.50	12.23	Peak
423.820	21.83	5.77	32.23	47.67	43.04	46.00	2.96	Peak
677.960	24.68	7.17	32.13	42.31	42.03	46.00	3.97	Peak
847.710	26.12	8.12	31.71	37.74	40.27	46.00	5.73	Peak
962.170	26.83	8.78	30.89	29.97	34.69	54.00	19.31	Peak



A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

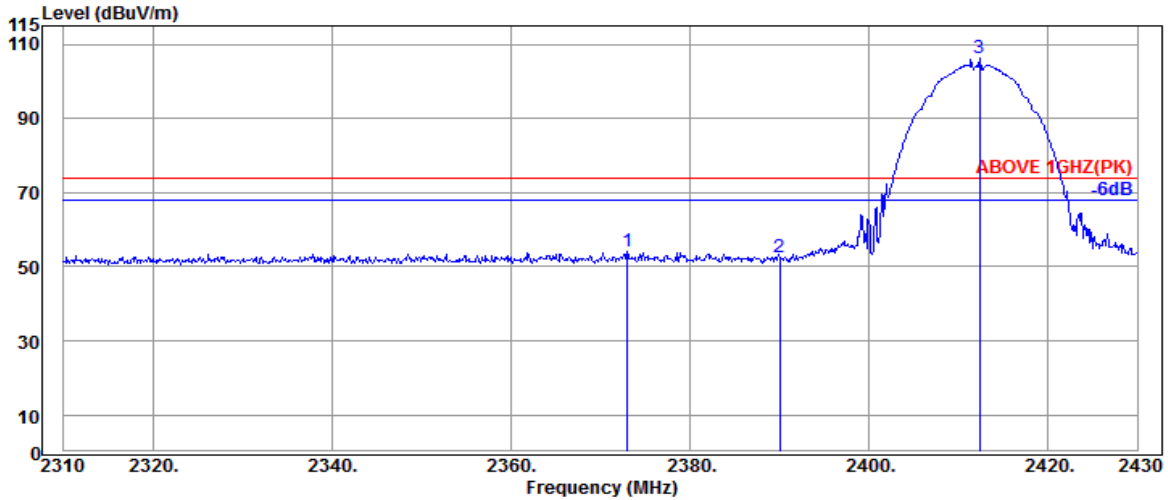

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.000	31.97	6.01	34.53	50.77	54.22	74.00	19.78	Peak
2390.040	31.89	6.04	34.54	49.17	52.56	74.00	21.44	Peak
@ 2412.360	31.94	6.07	34.54	102.72	106.19	---	---	Peak

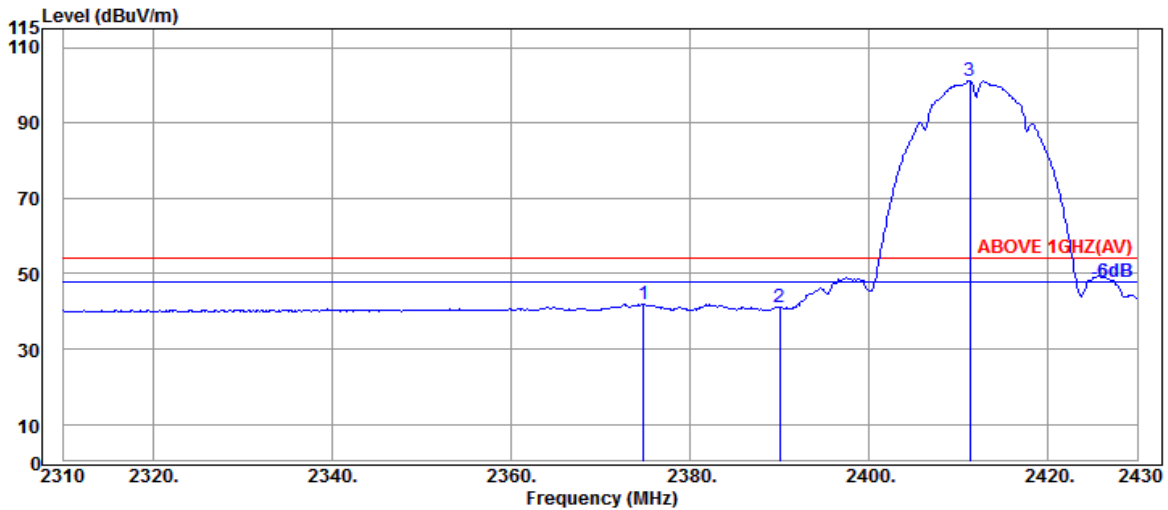


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.800	31.97	6.01	34.53	38.50	41.95	54.00	12.05	Average
2390.040	31.89	6.04	34.54	37.69	41.08	54.00	12.92	Average
@ 2411.280	31.94	6.07	34.54	97.66	101.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

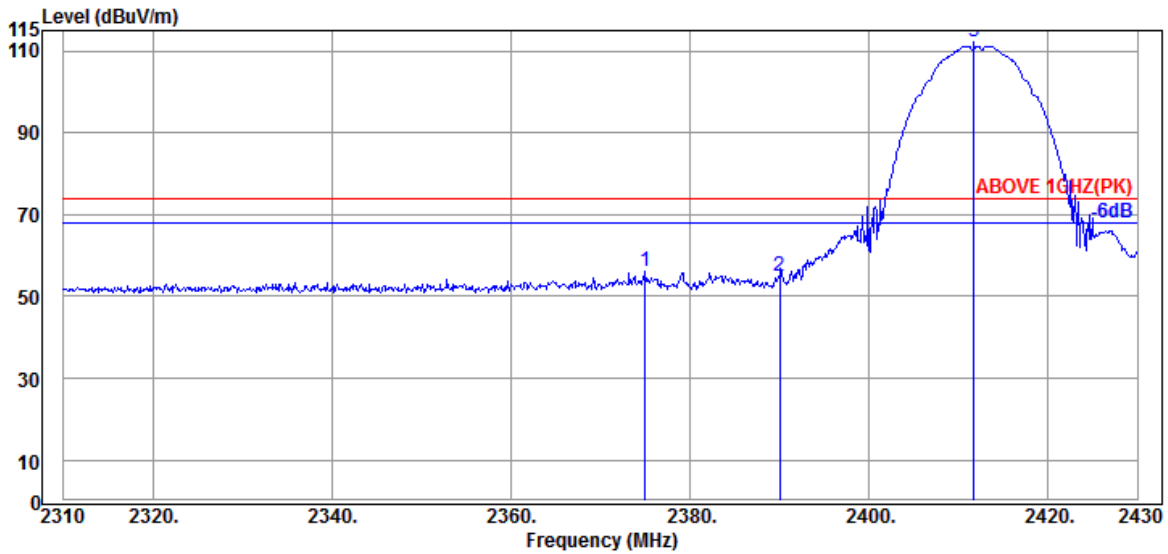

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.040	31.97	6.01	34.53	52.54	55.99	74.00	18.01	Peak
2390.040	31.89	6.04	34.54	51.62	55.01	74.00	18.99	Peak
@ 2411.760	31.94	6.07	34.54	108.82	112.29	---	---	Peak

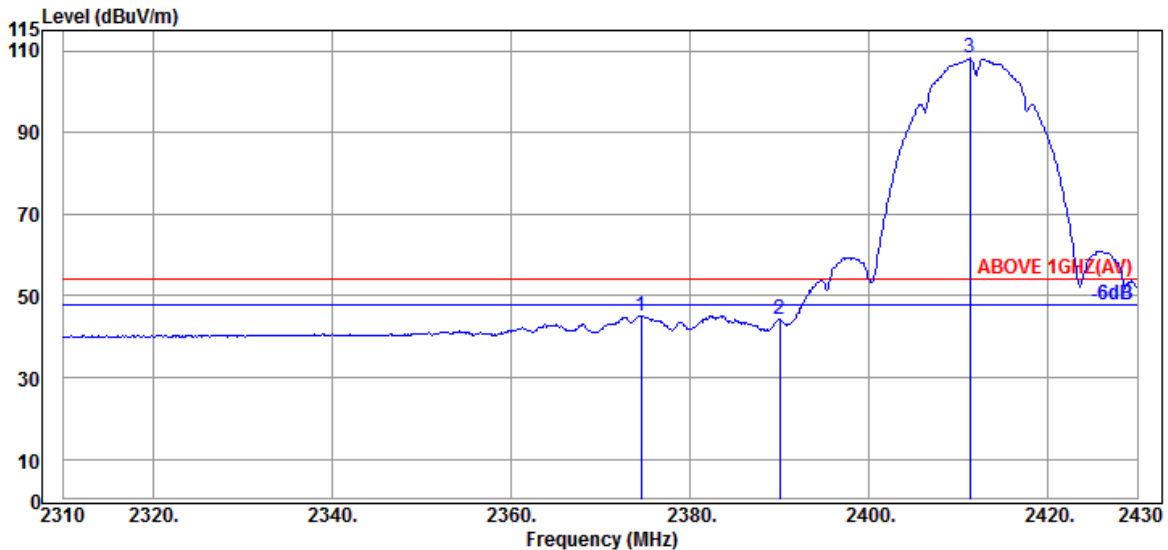


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.560	31.97	6.01	34.53	41.76	45.21	54.00	8.79	Average
2390.040	31.89	6.04	34.54	40.73	44.12	54.00	9.88	Average
@ 2411.280	31.94	6.07	34.54	104.64	108.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

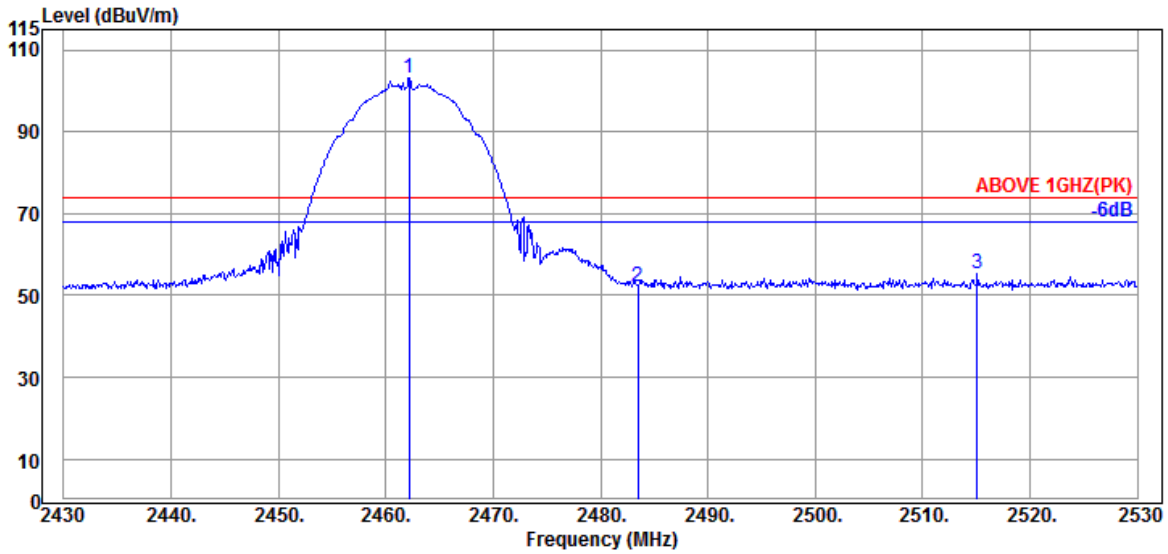

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.200	32.30	6.15	34.55	99.17	103.07	---	---	Peak
2483.500	32.30	6.18	34.55	48.30	52.23	74.00	21.77	Peak
2515.100	32.36	6.23	34.56	51.31	55.34	74.00	18.66	Peak

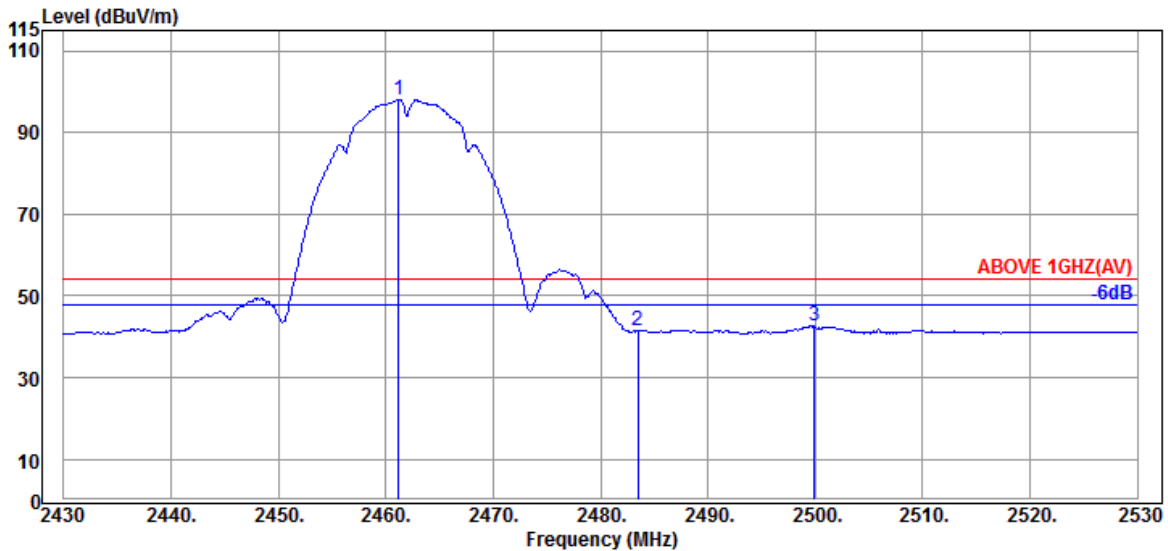


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.30	6.15	34.55	94.26	98.16	---	---	Average
2483.500	32.30	6.18	34.55	37.39	41.32	54.00	12.68	Average
2499.900	32.30	6.21	34.56	38.57	42.52	54.00	11.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

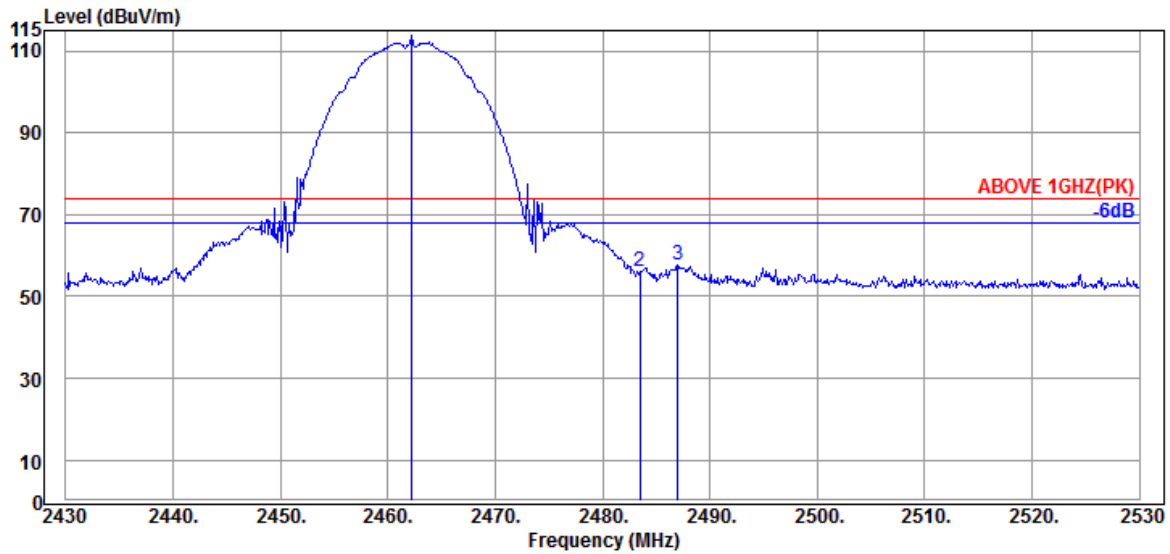

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.200	32.30	6.15	34.55	109.78	113.68	---	---	Peak
2483.500	32.30	6.18	34.55	52.37	56.30	74.00	17.70	Peak
2487.000	32.30	6.18	34.55	53.92	57.85	74.00	16.15	Peak

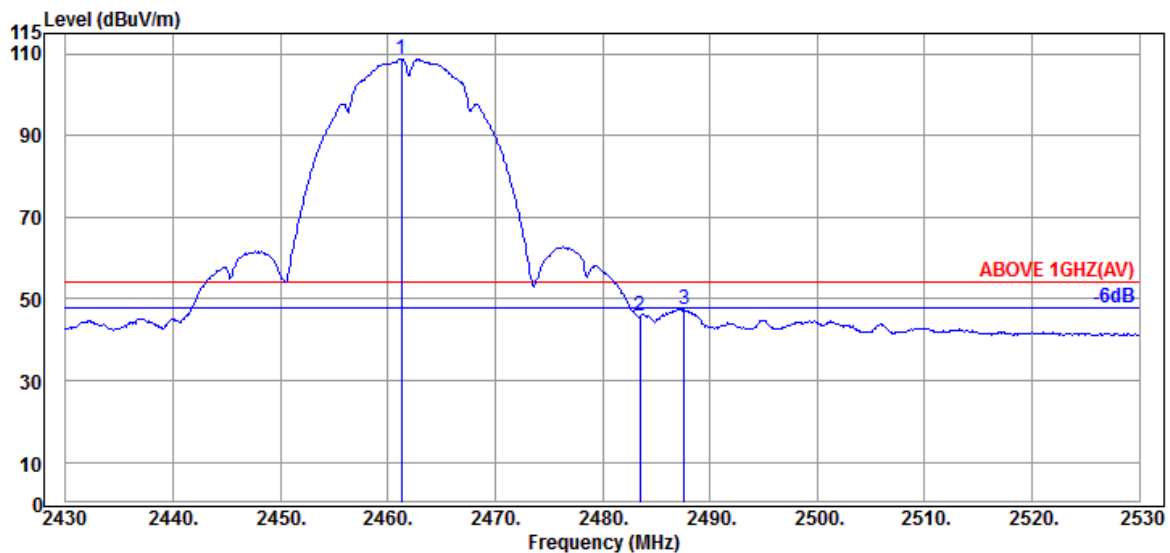


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.30	6.15	34.55	104.90	108.80	---	---	Average
2483.500	32.30	6.18	34.55	41.89	45.82	54.00	8.18	Average
2487.600	32.30	6.21	34.55	43.60	47.56	54.00	6.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

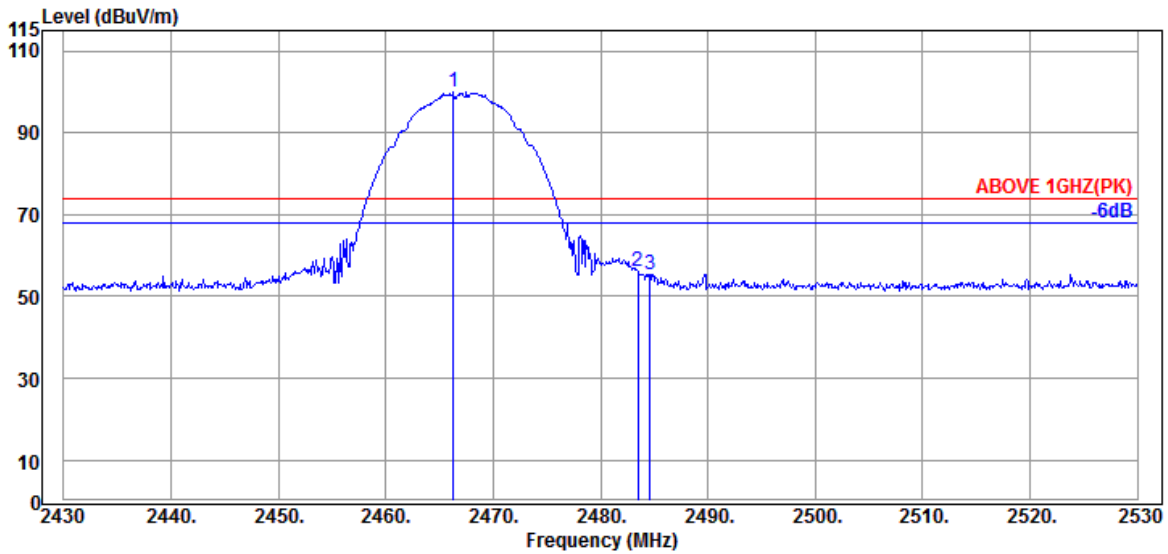

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	32.30	6.15	34.55	96.22	100.12	---	---	Peak
2483.500	32.30	6.18	34.55	52.20	56.13	74.00	17.87	Peak
2484.600	32.30	6.18	34.55	51.50	55.43	74.00	18.57	Peak

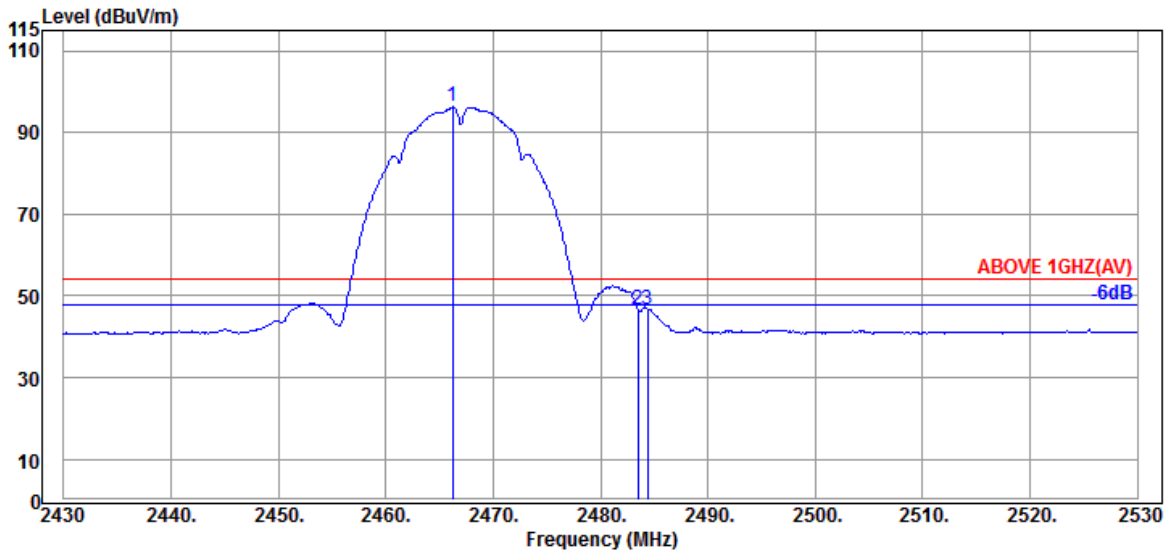


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.30	6.15	34.55	92.35	96.25	---	---	Average
2483.500	32.30	6.18	34.55	42.52	46.45	54.00	7.55	Average
2484.400	32.30	6.18	34.55	42.83	46.76	54.00	7.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

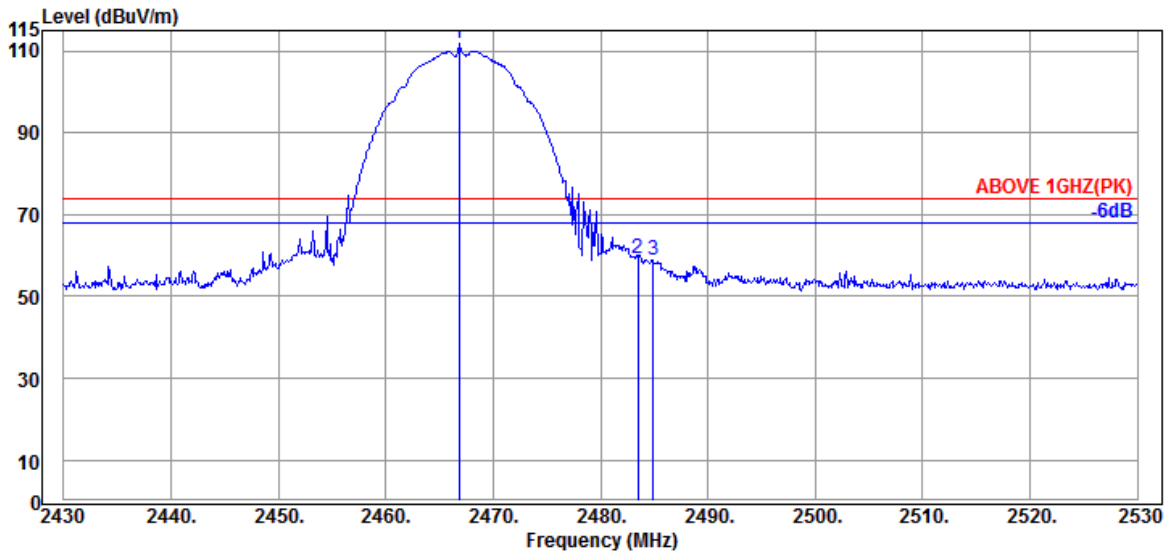

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.800	32.30	6.15	34.55	107.89	111.79	---	---	Peak
2483.500	32.30	6.18	34.55	55.43	59.36	74.00	14.64	Peak
2484.900	32.30	6.18	34.55	54.83	58.76	74.00	15.24	Peak

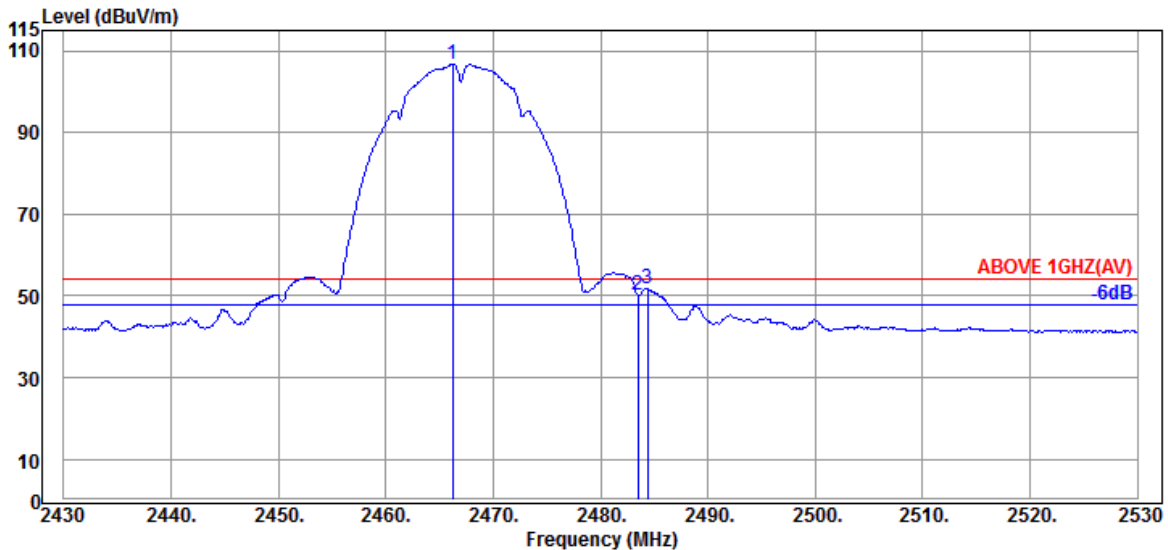


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.30	6.15	34.55	102.84	106.74	---	---	Average
2483.500	32.30	6.18	34.55	46.21	50.14	54.00	3.86	Average
2484.400	32.30	6.18	34.55	47.87	51.80	54.00	2.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

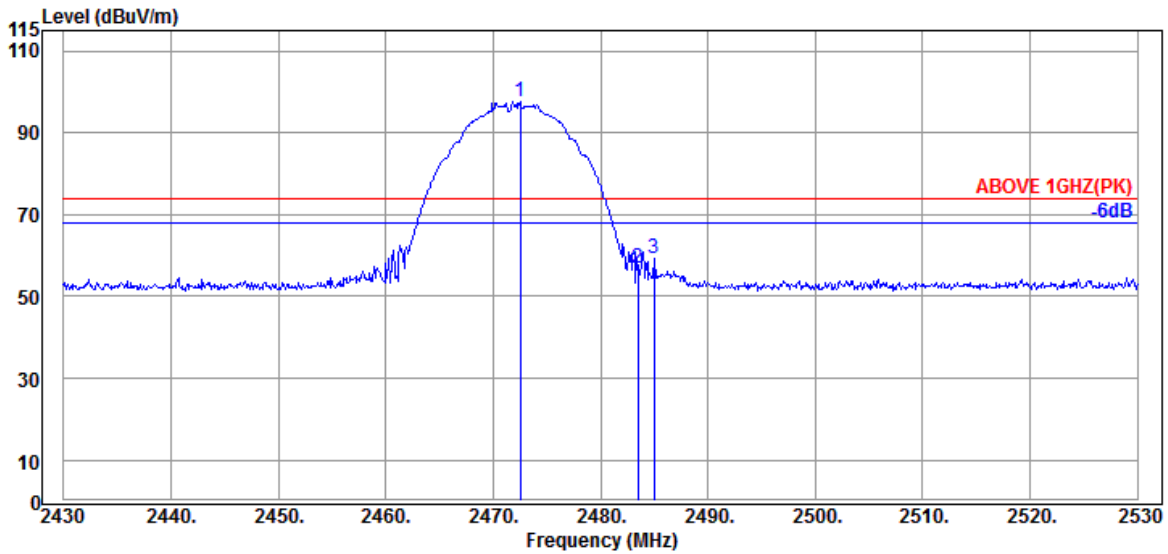

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	32.30	6.18	34.55	93.83	97.76	---	---	Peak
2483.500	32.30	6.18	34.55	52.85	56.78	74.00	17.22	Peak
2485.000	32.30	6.18	34.55	55.20	59.13	74.00	14.87	Peak

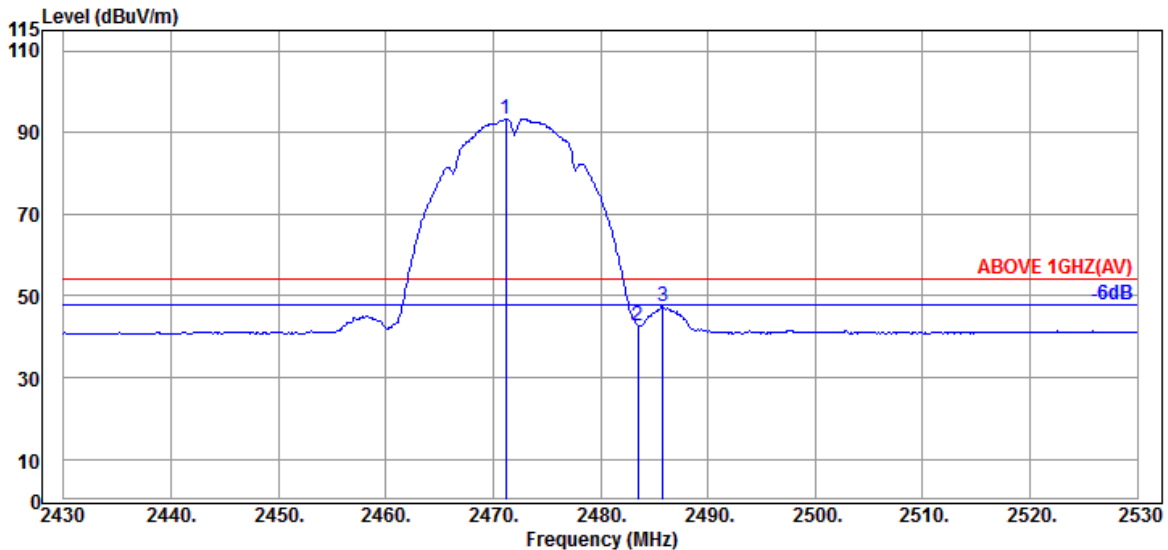


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.30	6.18	34.55	89.46	93.39	---	---	Average
2483.500	32.30	6.18	34.55	38.69	42.62	54.00	11.38	Average
2485.800	32.30	6.18	34.55	43.34	47.27	54.00	6.73	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

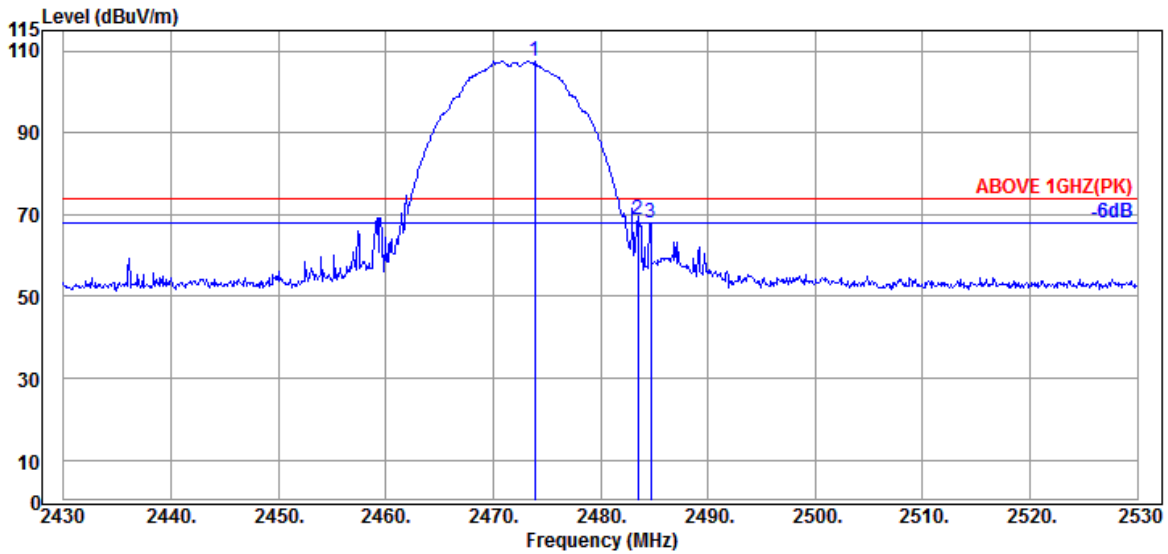

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.900	32.30	6.18	34.55	103.43	107.36	---	---	Peak
2483.500	32.30	6.18	34.55	64.96	68.89	74.00	5.11	Peak
2484.700	32.30	6.18	34.55	64.18	68.11	74.00	5.89	Peak

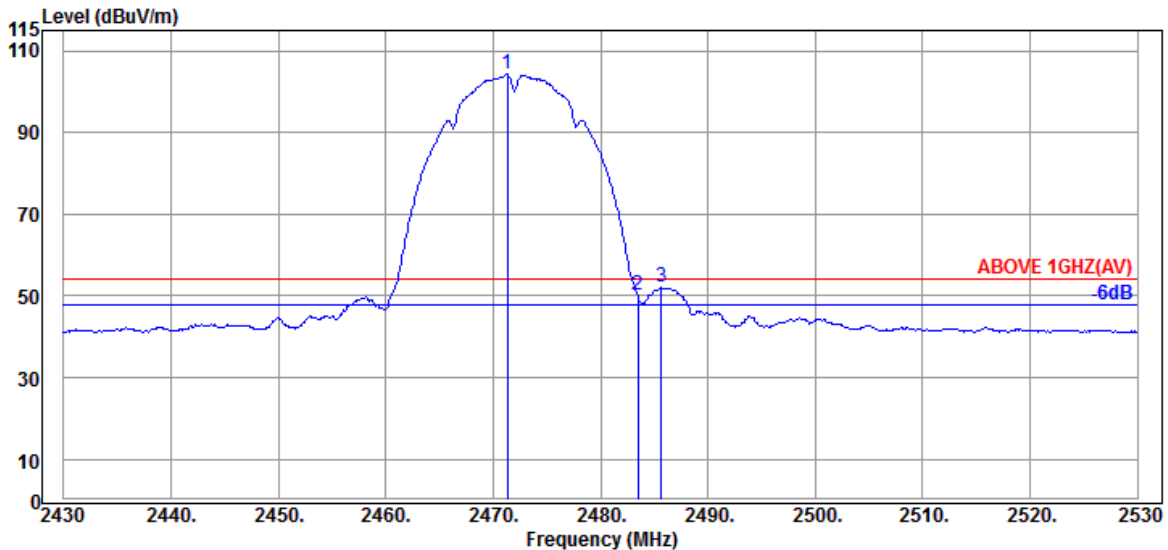


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.30	6.18	34.55	100.23	104.16	---	---	Average
2483.500	32.30	6.18	34.55	46.22	50.15	54.00	3.85	Average
2485.700	32.30	6.18	34.55	48.11	52.04	54.00	1.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

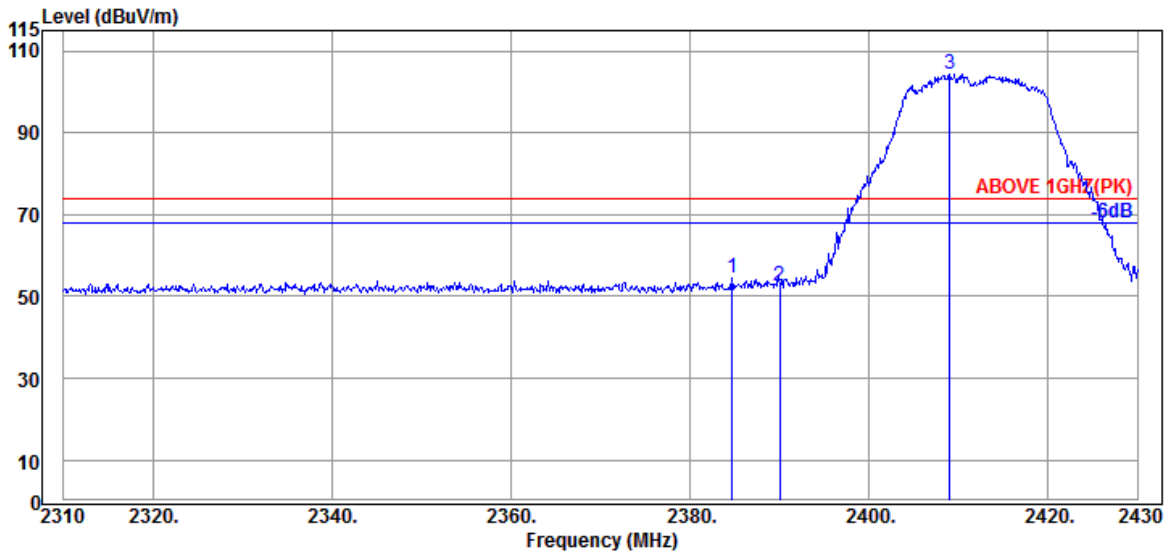

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.760	31.89	6.01	34.53	51.26	54.63	74.00	19.37	Peak
2390.040	31.89	6.04	34.54	49.17	52.56	74.00	21.44	Peak
@ 2409.000	31.87	6.07	34.54	101.03	104.43	---	---	Peak

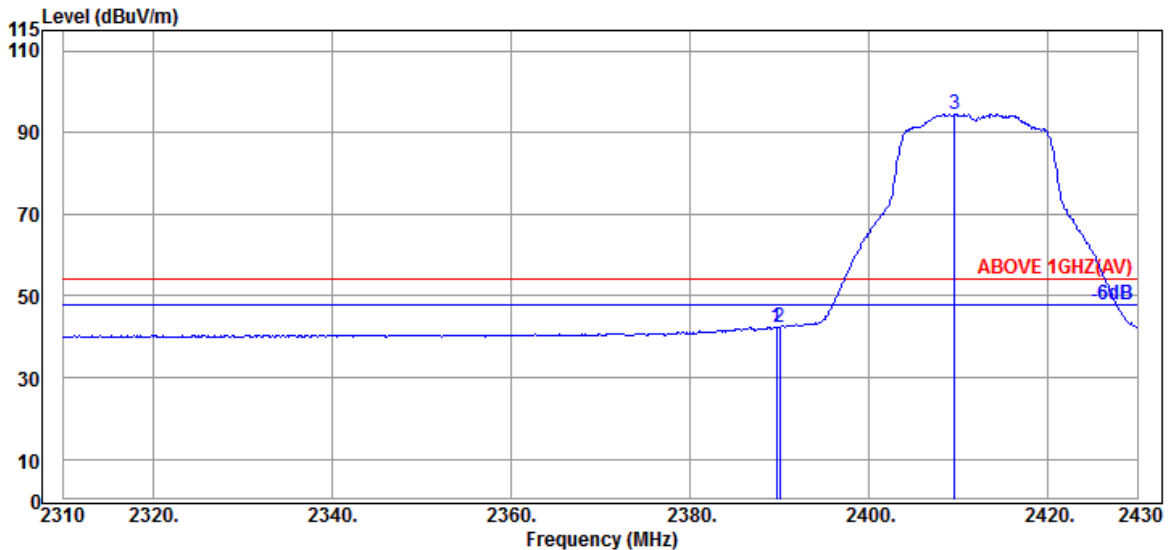


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	6.04	34.53	39.05	42.45	54.00	11.55	Average
2390.040	31.89	6.04	34.54	38.96	42.35	54.00	11.65	Average
@ 2409.600	31.87	6.07	34.54	91.03	94.43	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

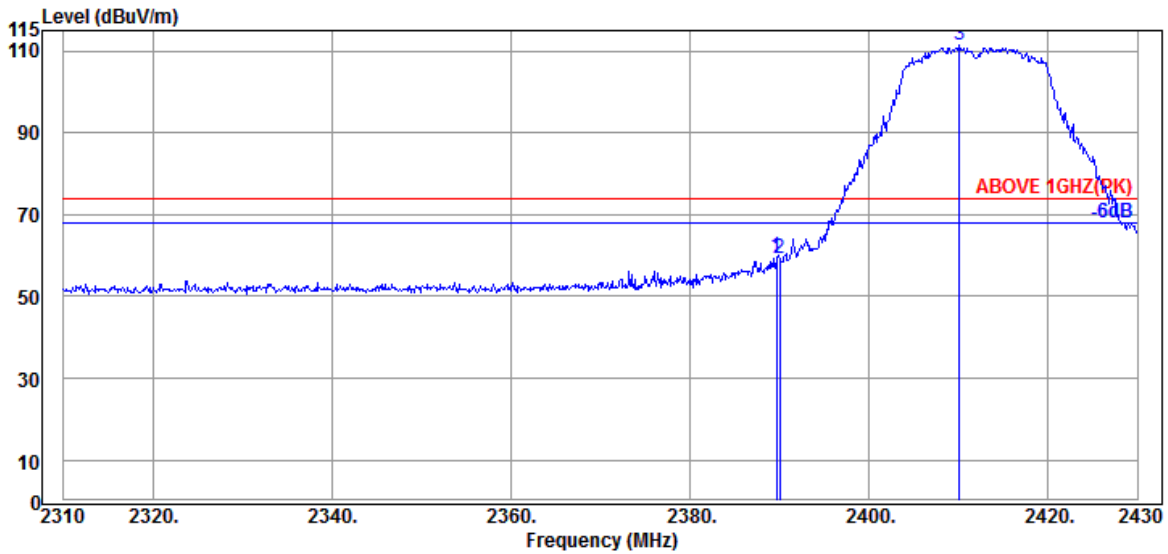

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	6.04	34.53	56.09	59.49	74.00	14.51	Peak
2390.040	31.89	6.04	34.54	55.74	59.13	74.00	14.87	Peak
@ 2410.080	31.87	6.07	34.54	108.23	111.63	---	---	Peak

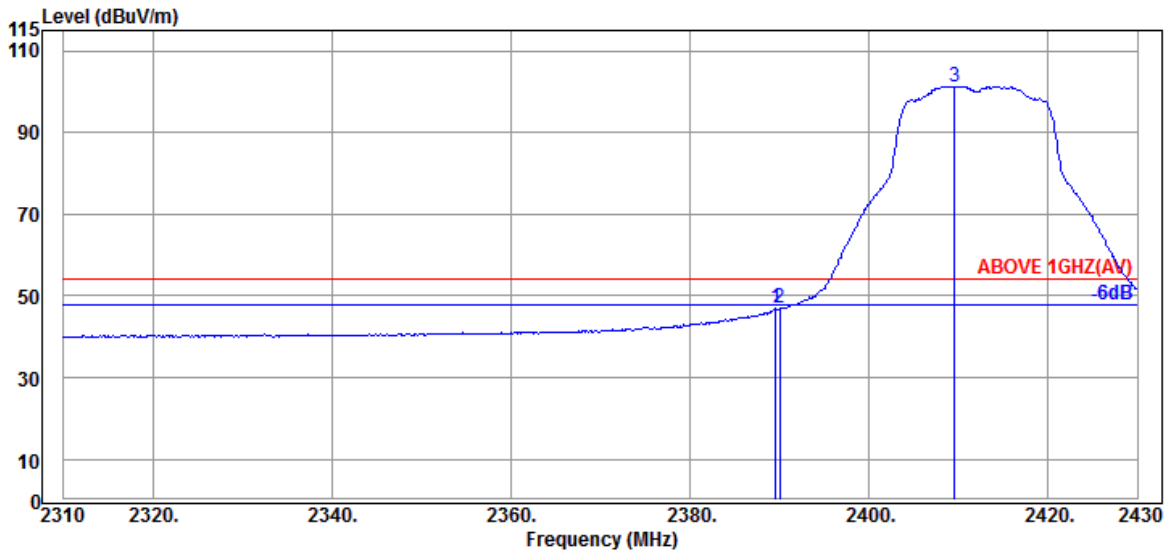


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	6.04	34.53	43.45	46.85	54.00	7.15	Average
2390.040	31.89	6.04	34.54	43.45	46.84	54.00	7.16	Average
@ 2409.600	31.87	6.07	34.54	97.95	101.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

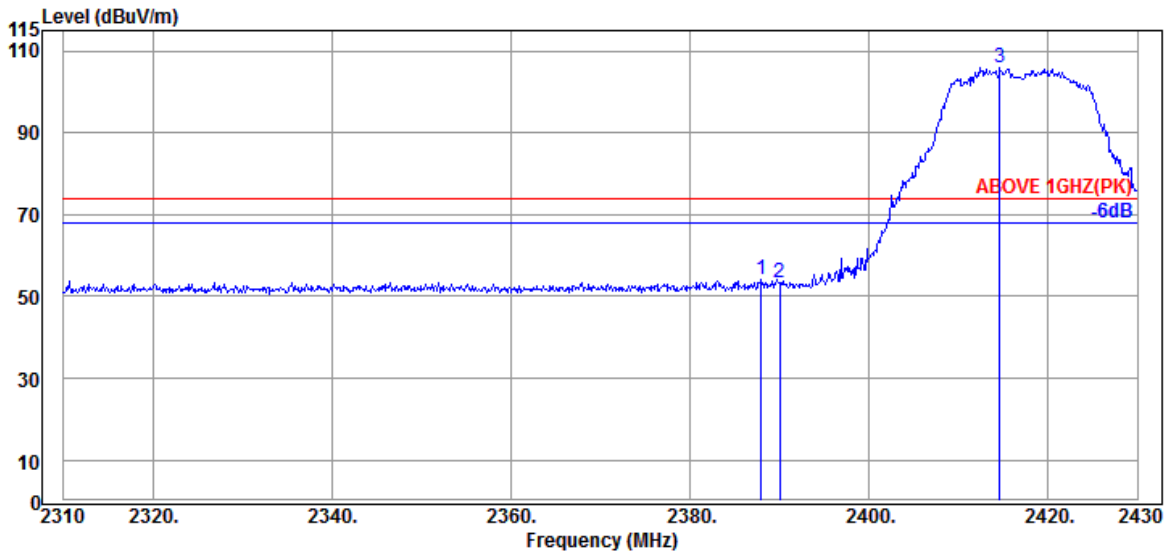

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	31.89	6.04	34.53	50.66	54.06	74.00	19.94	Peak
2390.040	31.89	6.04	34.54	50.10	53.49	74.00	20.51	Peak
@ 2414.640	31.94	6.07	34.54	102.51	105.98	---	---	Peak

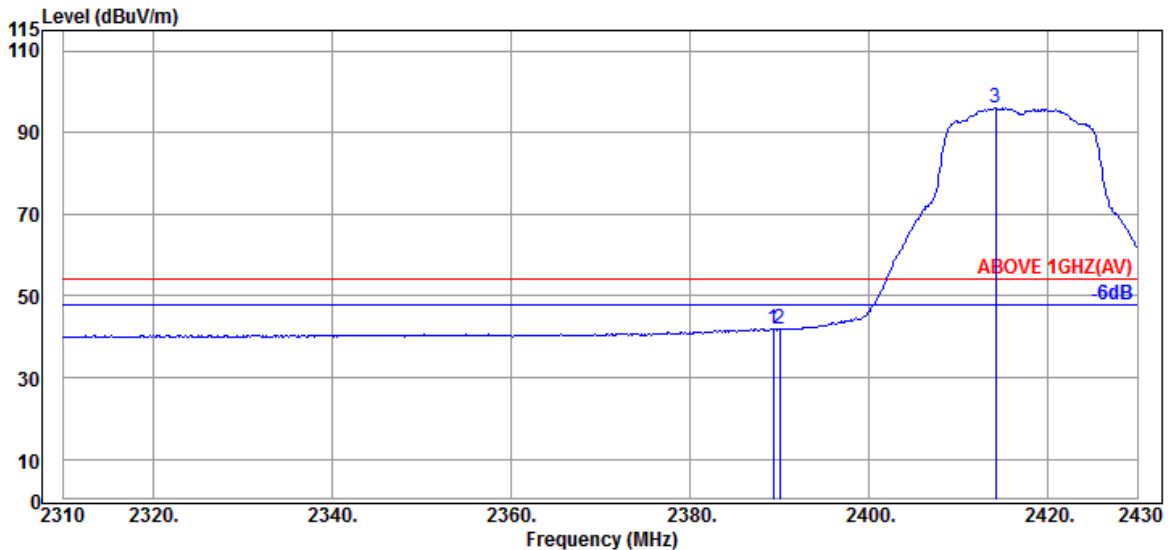


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	6.04	34.53	38.59	41.99	54.00	12.01	Average
2390.040	31.89	6.04	34.54	38.42	41.81	54.00	12.19	Average
@ 2414.160	31.94	6.07	34.54	92.69	96.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

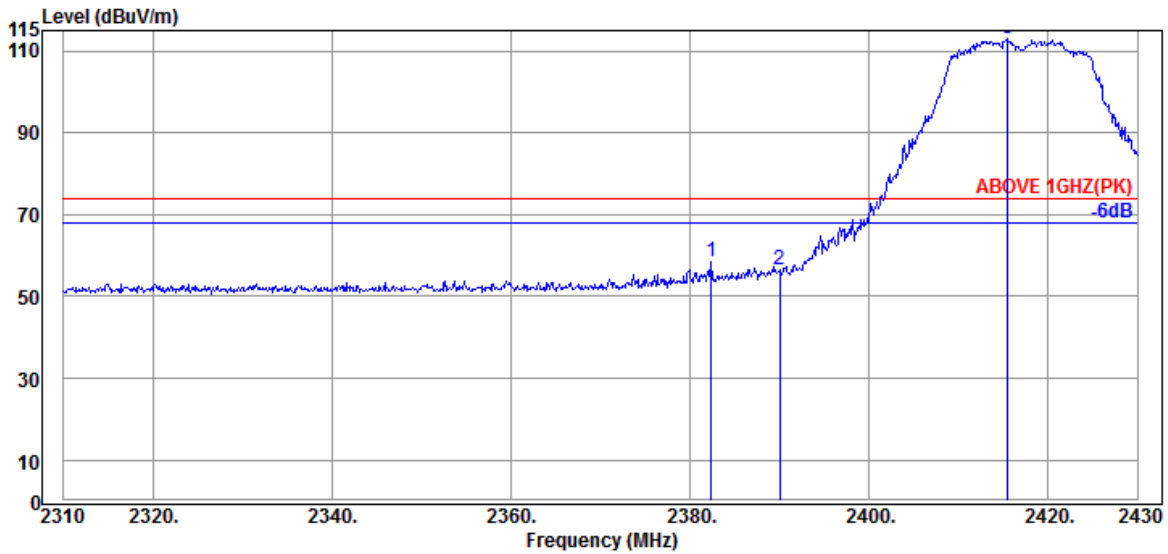

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.360	31.93	6.01	34.53	54.93	58.34	74.00	15.66	Peak
2390.040	31.89	6.04	34.54	53.00	56.39	74.00	17.61	Peak
@ 2415.480	31.94	6.07	34.54	109.59	113.06	---	---	Peak

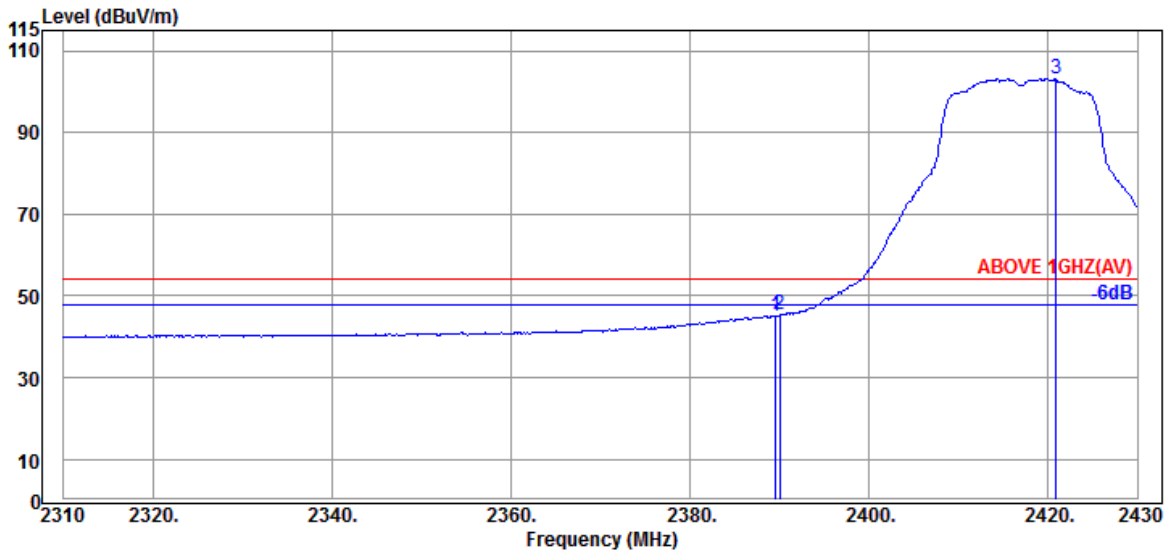


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	6.04	34.53	41.83	45.23	54.00	8.77	Average
2390.040	31.89	6.04	34.54	41.90	45.29	54.00	8.71	Average
@ 2420.880	32.01	6.10	34.54	99.60	103.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

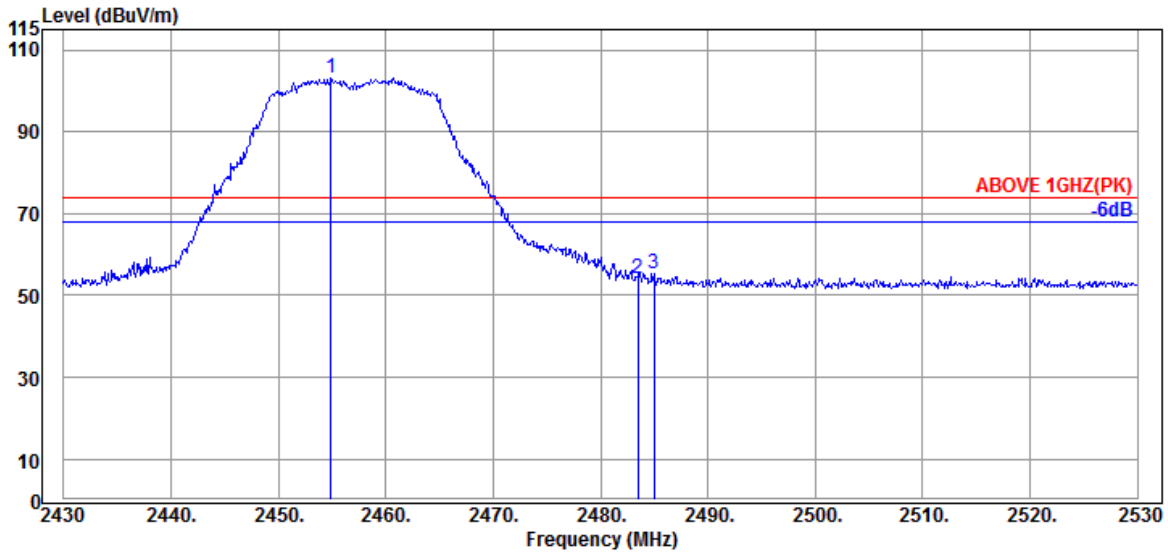

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.900	32.30	6.15	34.55	99.16	103.06	---	---	Peak
2483.500	32.30	6.18	34.55	50.37	54.30	74.00	19.70	Peak
2485.000	32.30	6.18	34.55	51.53	55.46	74.00	18.54	Peak

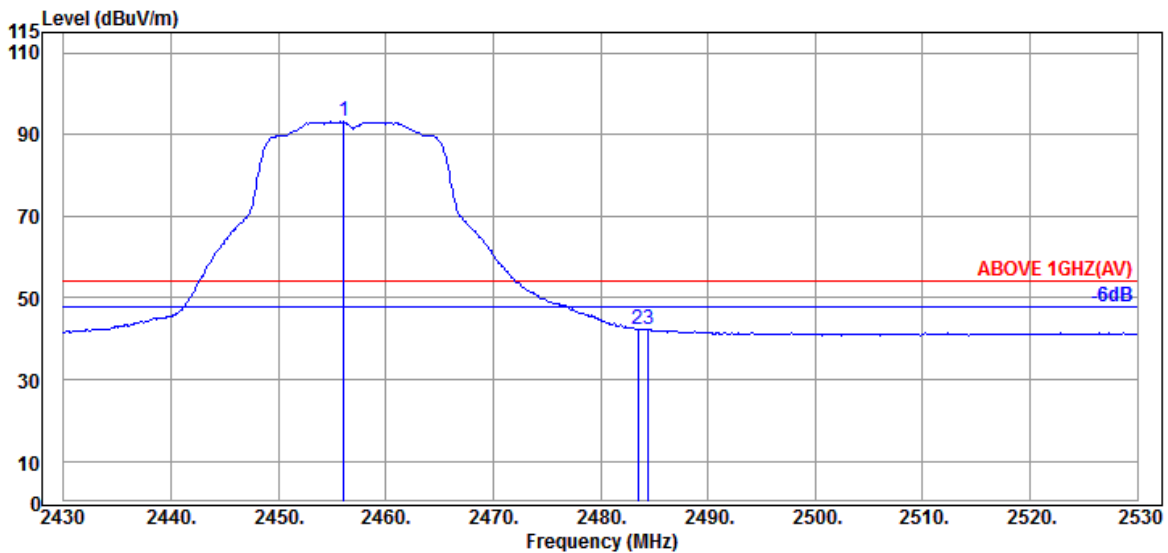


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.100	32.30	6.15	34.55	89.37	93.27	---	---	Average
2483.500	32.30	6.18	34.55	38.34	42.27	54.00	11.73	Average
2484.500	32.30	6.18	34.55	38.27	42.20	54.00	11.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

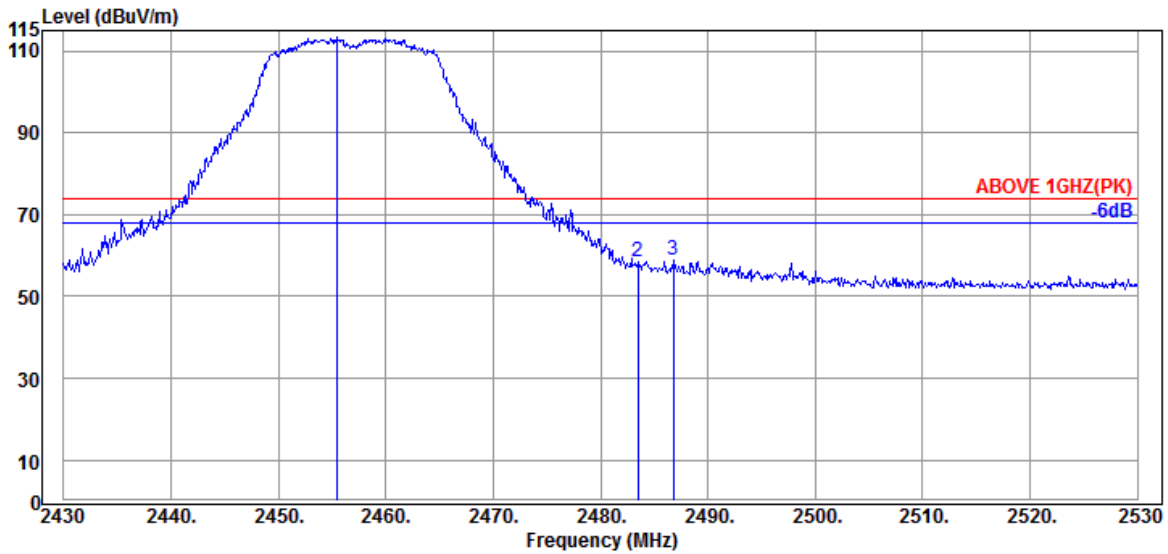

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.400	32.30	6.15	34.55	109.43	113.33	---	---	Peak
2483.500	32.30	6.18	34.55	54.54	58.47	74.00	15.53	Peak
2486.800	32.30	6.18	34.55	54.83	58.76	74.00	15.24	Peak

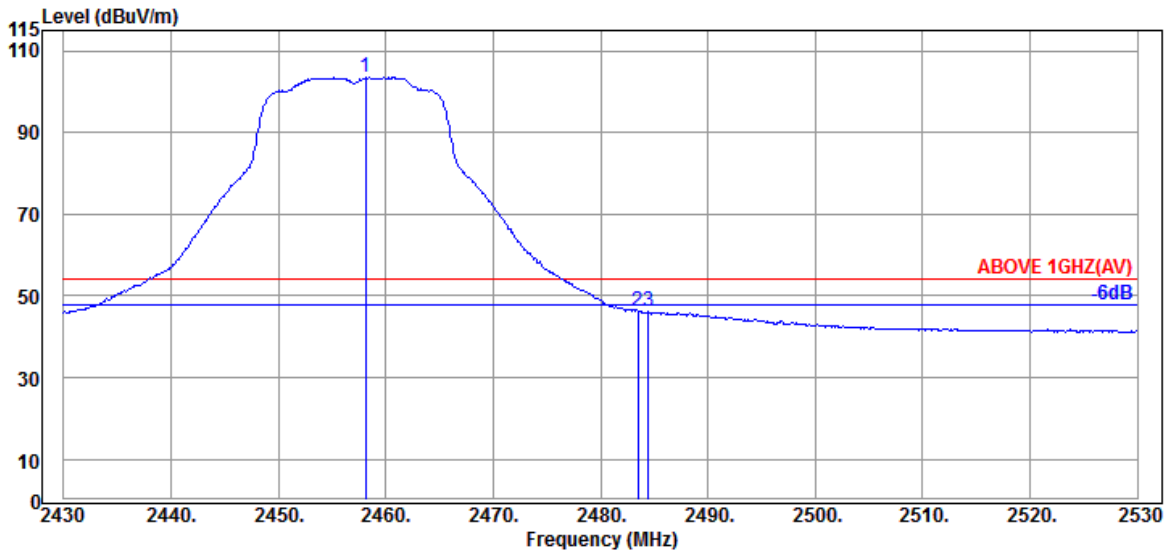


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	32.30	6.15	34.55	99.54	103.44	---	---	Average
2483.500	32.30	6.18	34.55	42.49	46.42	54.00	7.58	Average
2484.500	32.30	6.18	34.55	42.21	46.14	54.00	7.86	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

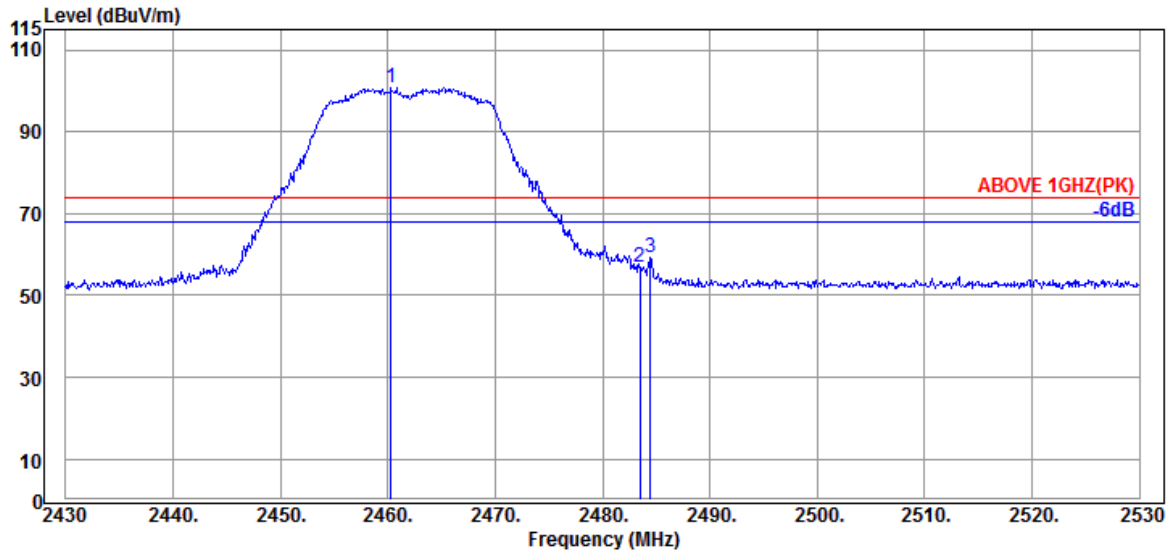

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	32.30	6.15	34.55	96.93	100.83	---	---	Peak
2483.500	32.30	6.18	34.55	53.01	56.94	74.00	17.06	Peak
2484.500	32.30	6.18	34.55	55.16	59.09	74.00	14.91	Peak

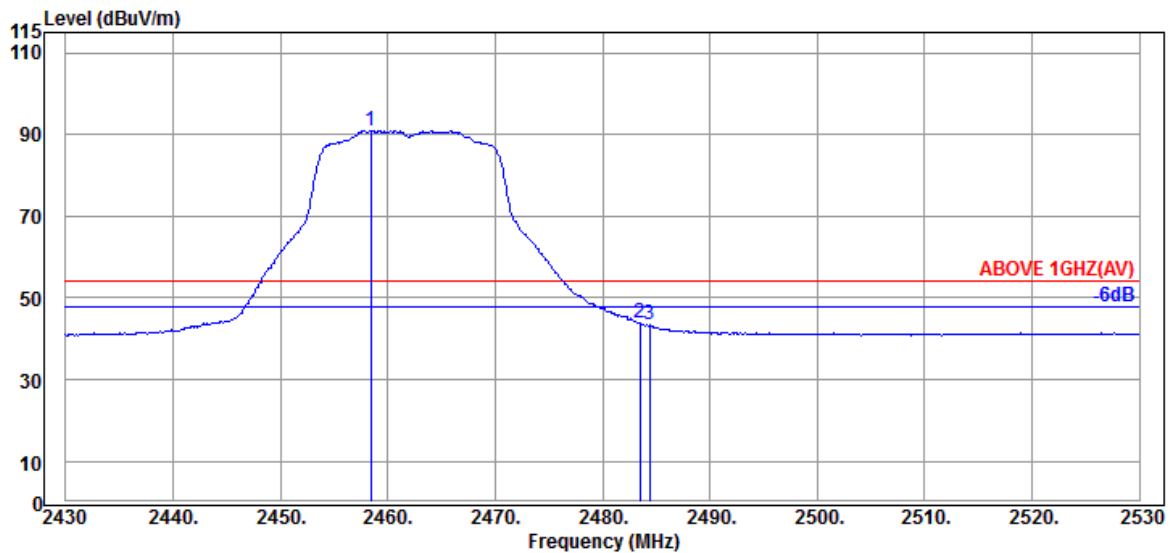


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	32.30	6.15	34.55	86.97	90.87	---	---	Average
2483.500	32.30	6.18	34.55	40.02	43.95	54.00	10.05	Average
2484.400	32.30	6.18	34.55	39.37	43.30	54.00	10.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

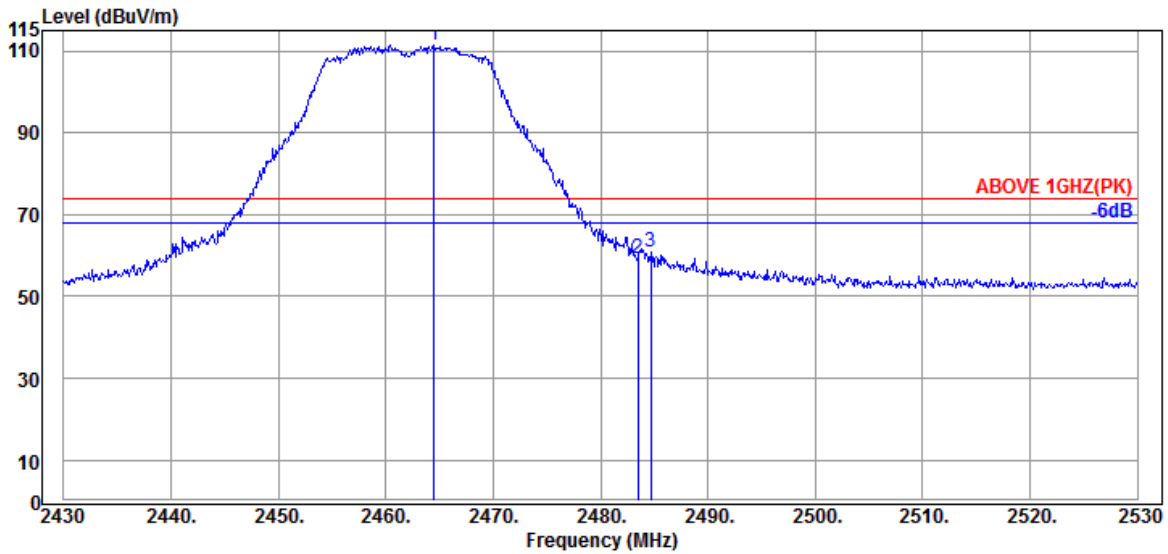

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	6.15	34.55	107.52	111.42	---	---	Peak
2483.500	32.30	6.18	34.55	55.50	59.43	74.00	14.57	Peak
2484.700	32.30	6.18	34.55	57.11	61.04	74.00	12.96	Peak

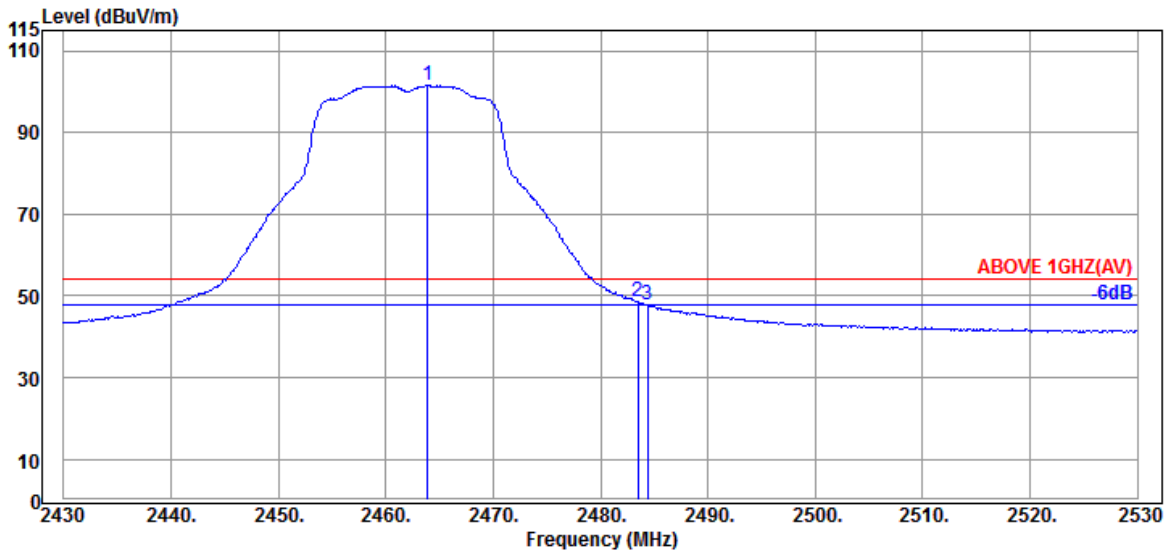


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.30	6.15	34.55	97.68	101.58	---	---	Average
2483.500	32.30	6.18	34.55	44.59	48.52	54.00	5.48	Average
2484.400	32.30	6.18	34.55	43.84	47.77	54.00	6.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

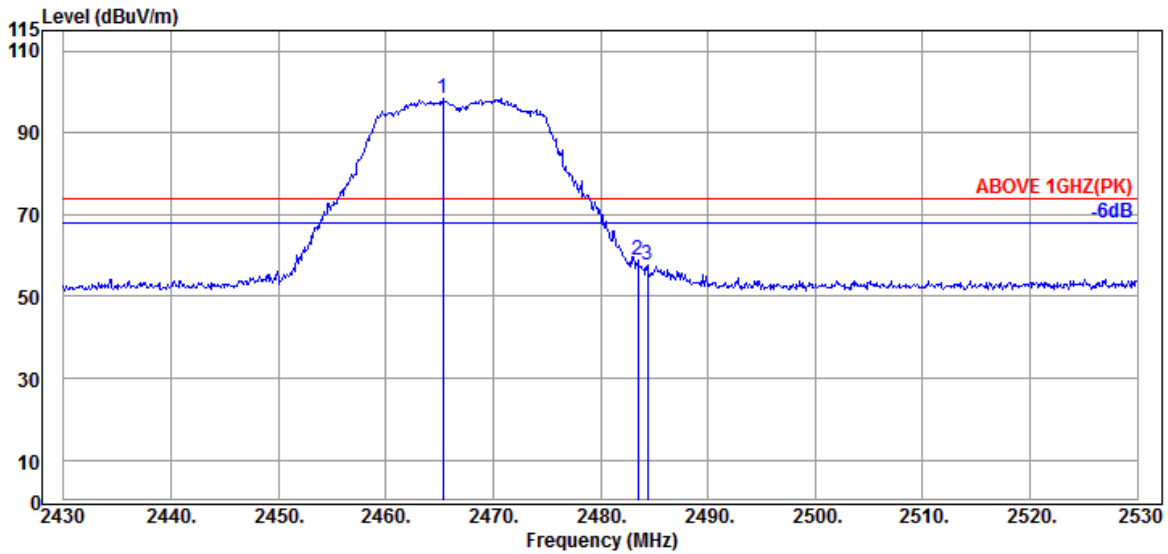

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	32.30	6.15	34.55	94.37	98.27	---	---	Peak
2483.500	32.30	6.18	34.55	54.80	58.73	74.00	15.27	Peak
2484.400	32.30	6.18	34.55	53.75	57.68	74.00	16.32	Peak

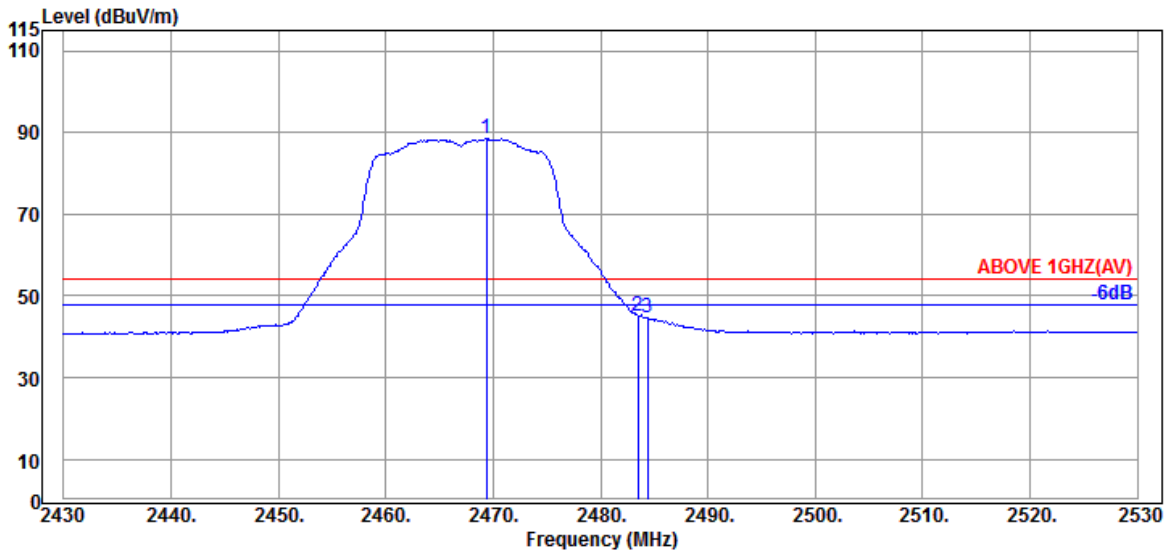


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	32.30	6.15	34.55	84.57	88.47	---	---	Average
2483.500	32.30	6.18	34.55	41.29	45.22	54.00	8.78	Average
2484.400	32.30	6.18	34.55	40.58	44.51	54.00	9.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

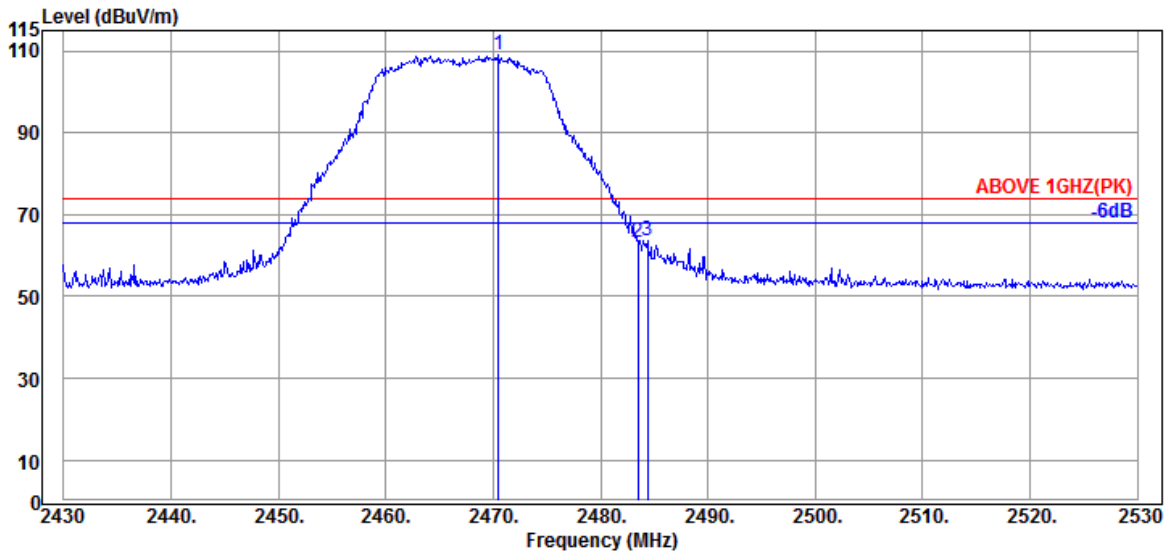

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	6.15	34.55	105.09	108.99	---	---	Peak
2483.500	32.30	6.18	34.55	59.26	63.19	74.00	10.81	Peak
2484.400	32.30	6.18	34.55	59.67	63.60	74.00	10.40	Peak

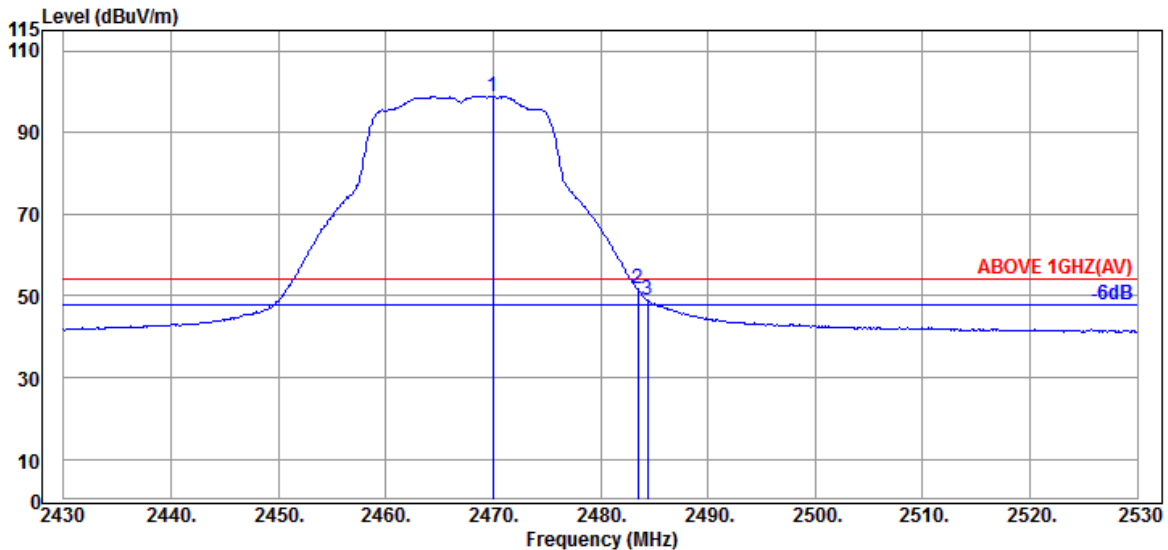


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	32.30	6.15	34.55	94.99	98.89	---	---	Average
2483.500	32.30	6.18	34.55	47.75	51.68	54.00	2.32	Average
2484.400	32.30	6.18	34.55	44.99	48.92	54.00	5.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

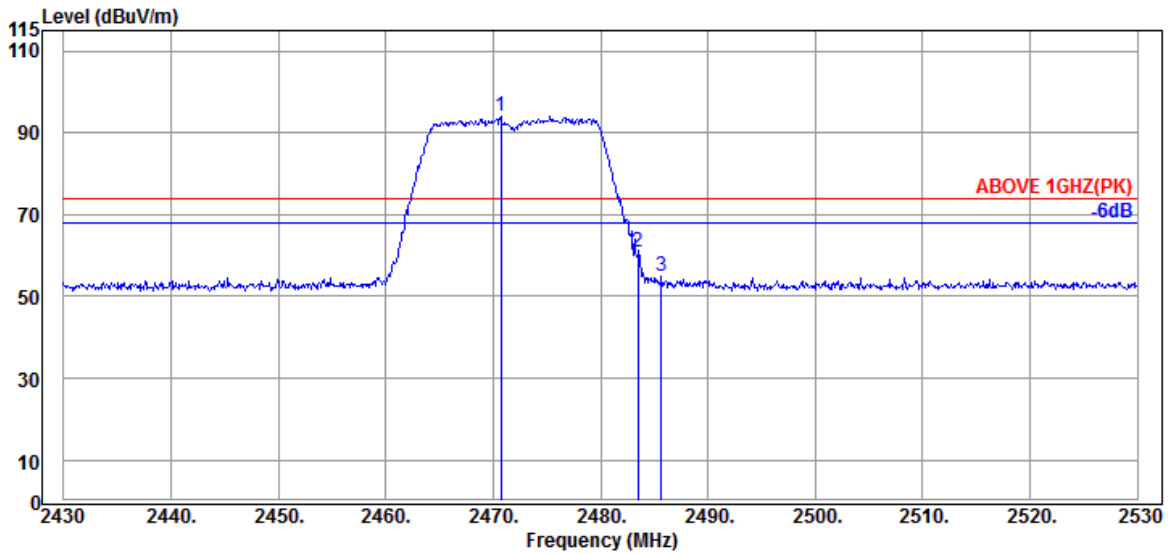

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.700	32.30	6.18	34.55	90.05	93.98	---	---	Peak
2483.500	32.30	6.18	34.55	57.05	60.98	74.00	13.02	Peak
2485.700	32.30	6.18	34.55	50.85	54.78	74.00	19.22	Peak

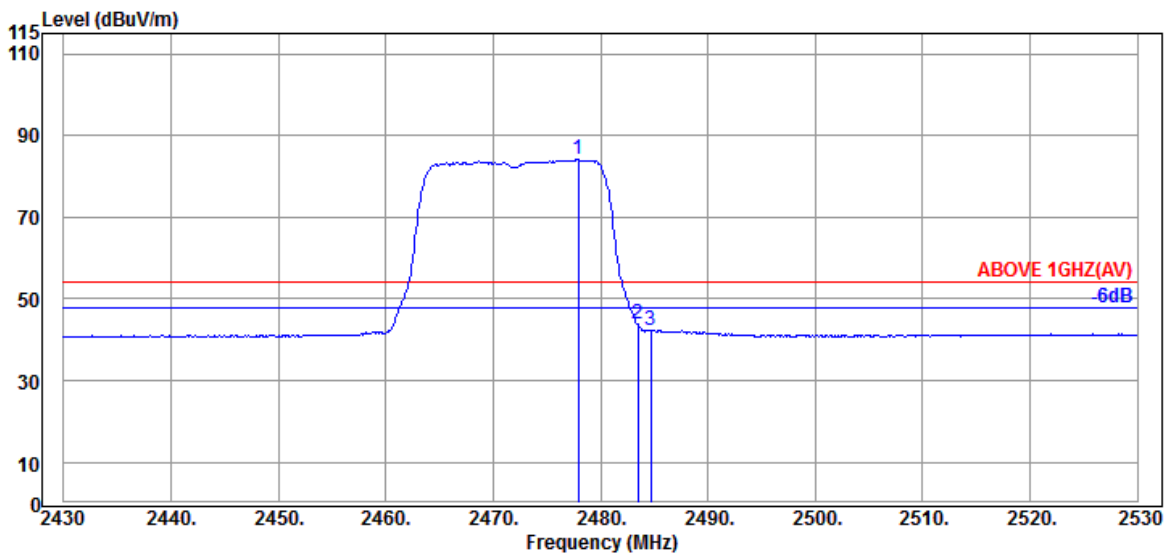


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.900	32.30	6.18	34.55	80.25	84.18	---	---	Average
2483.500	32.30	6.18	34.55	39.94	43.87	54.00	10.13	Average
2484.700	32.30	6.18	34.55	38.51	42.44	54.00	11.56	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

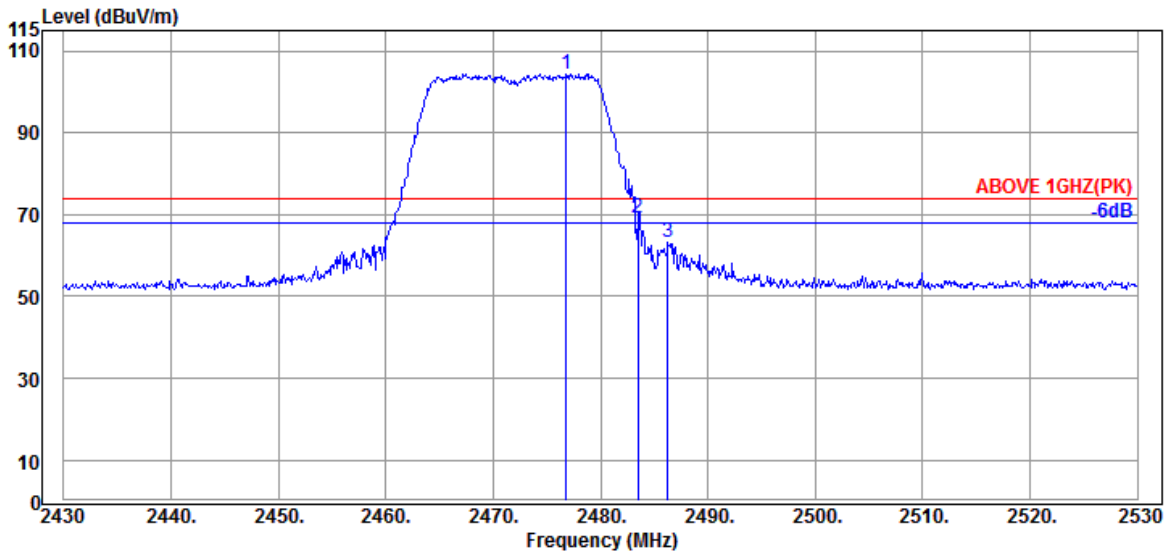

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.800	32.30	6.18	34.55	100.57	104.50	---	---	Peak
2483.500	32.30	6.18	34.55	65.40	69.33	74.00	4.67	Peak
2486.300	32.30	6.18	34.55	59.19	63.12	74.00	10.88	Peak

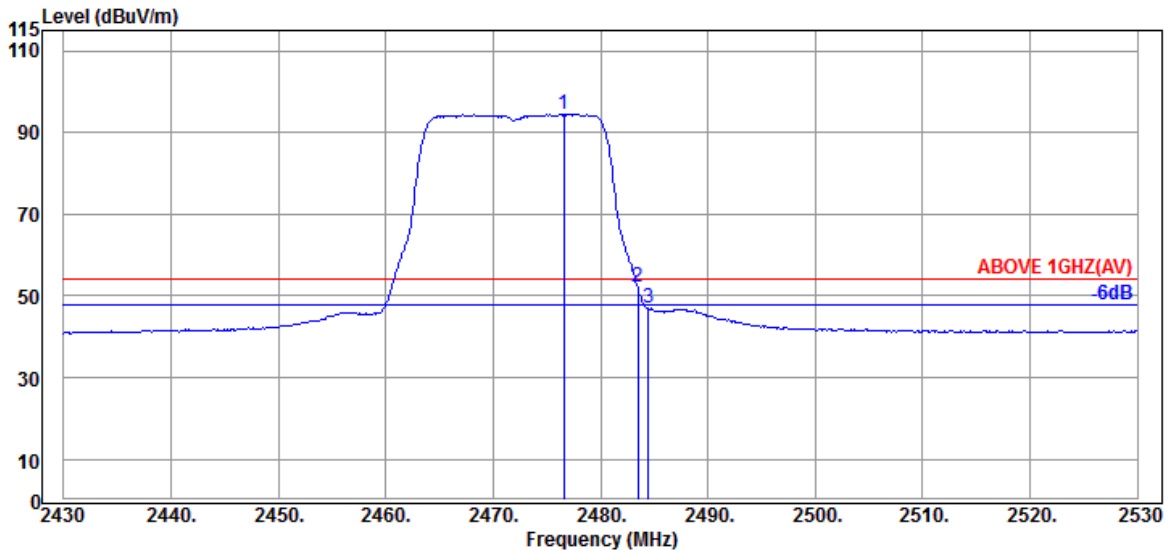


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	32.30	6.18	34.55	90.60	94.53	---	---	Average
2483.500	32.30	6.18	34.55	48.25	52.18	54.00	1.82	Average
2484.500	32.30	6.18	34.55	42.99	46.92	54.00	7.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

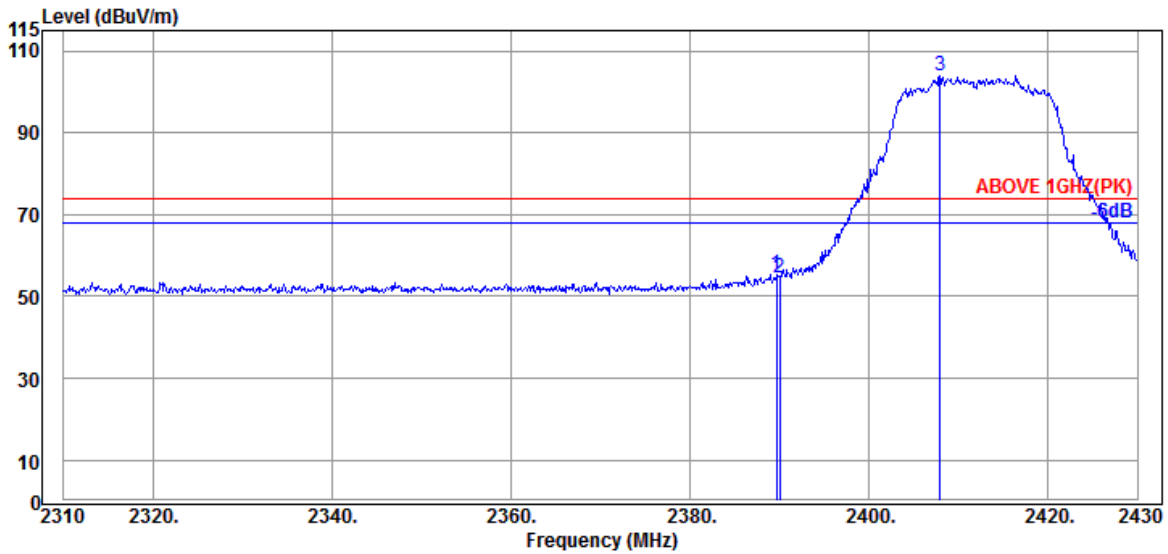

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	6.04	34.53	52.11	55.51	74.00	18.49	Peak
2390.040	31.89	6.04	34.54	51.14	54.53	74.00	19.47	Peak
@ 2407.920	31.87	6.07	34.54	100.50	103.90	---	---	Peak

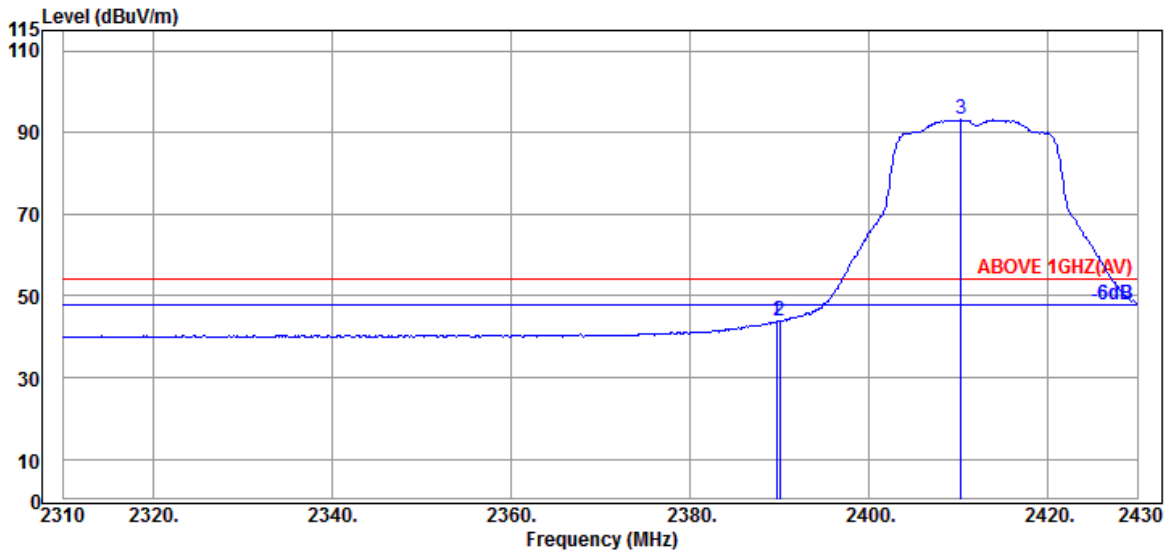


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	6.04	34.53	40.35	43.75	54.00	10.25	Average
2390.040	31.89	6.04	34.54	40.30	43.69	54.00	10.31	Average
@ 2410.320	31.87	6.07	34.54	89.70	93.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

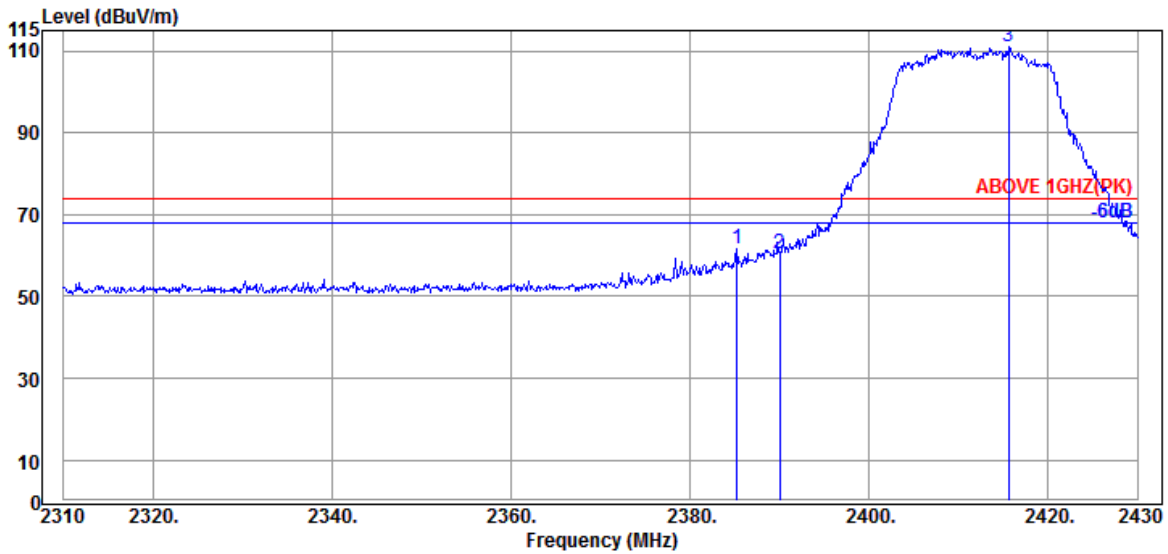

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	31.89	6.01	34.53	58.23	61.60	74.00	12.40	Peak
2390.040	31.89	6.04	34.54	57.23	60.62	74.00	13.38	Peak
@ 2415.600	31.94	6.07	34.54	107.71	111.18	---	---	Peak

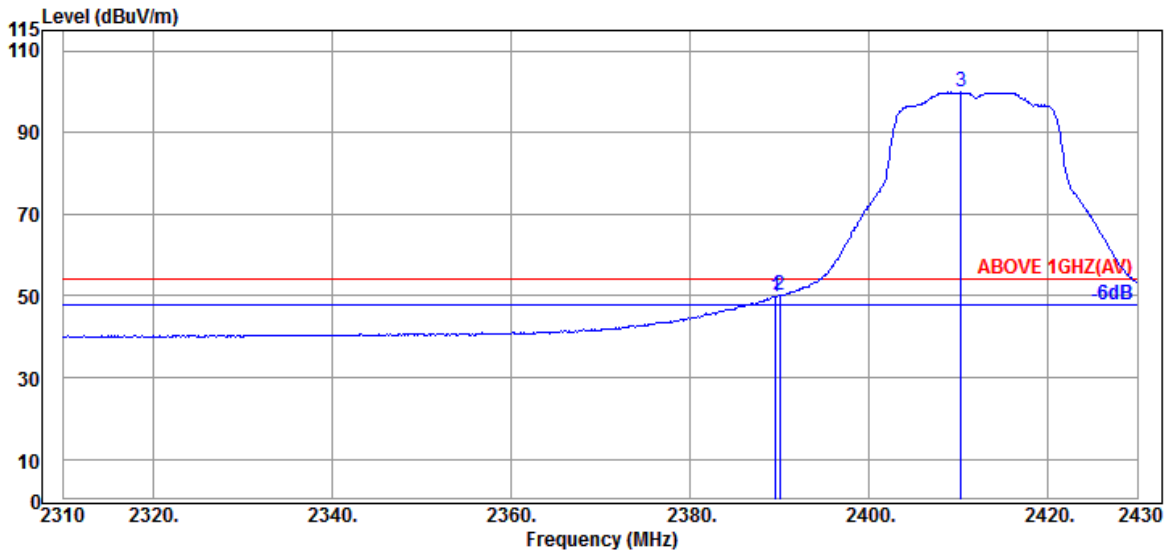


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	6.04	34.53	46.51	49.91	54.00	4.09	Average
2390.040	31.89	6.04	34.54	46.78	50.17	54.00	3.83	Average
@ 2410.320	31.87	6.07	34.54	96.52	99.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

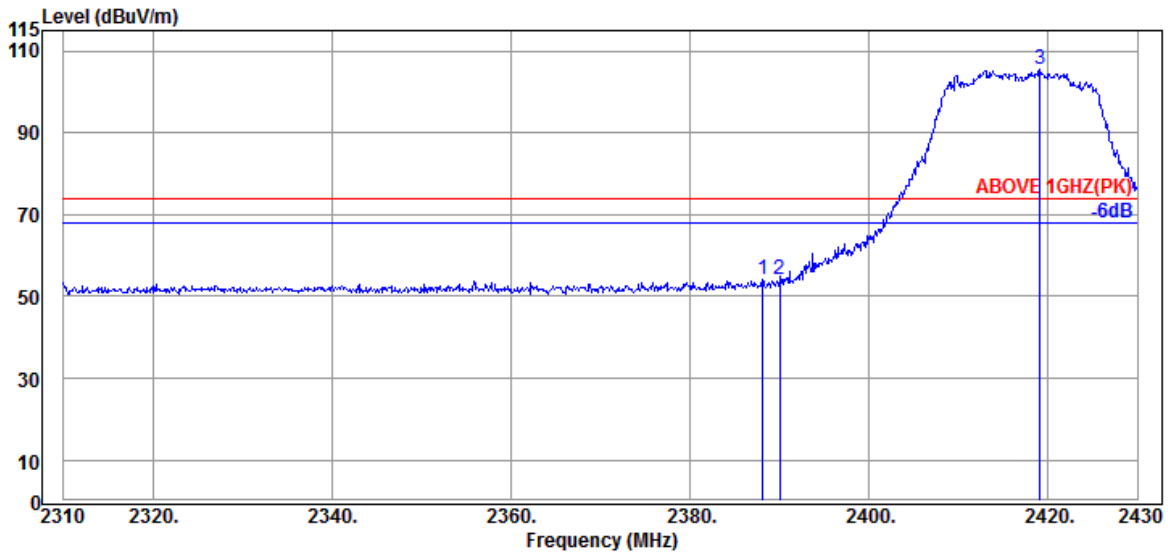

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	31.89	6.04	34.53	50.86	54.26	74.00	19.74	Peak
2390.040	31.89	6.04	34.54	50.73	54.12	74.00	19.88	Peak
@ 2419.080	32.01	6.07	34.54	101.81	105.35	---	---	Peak

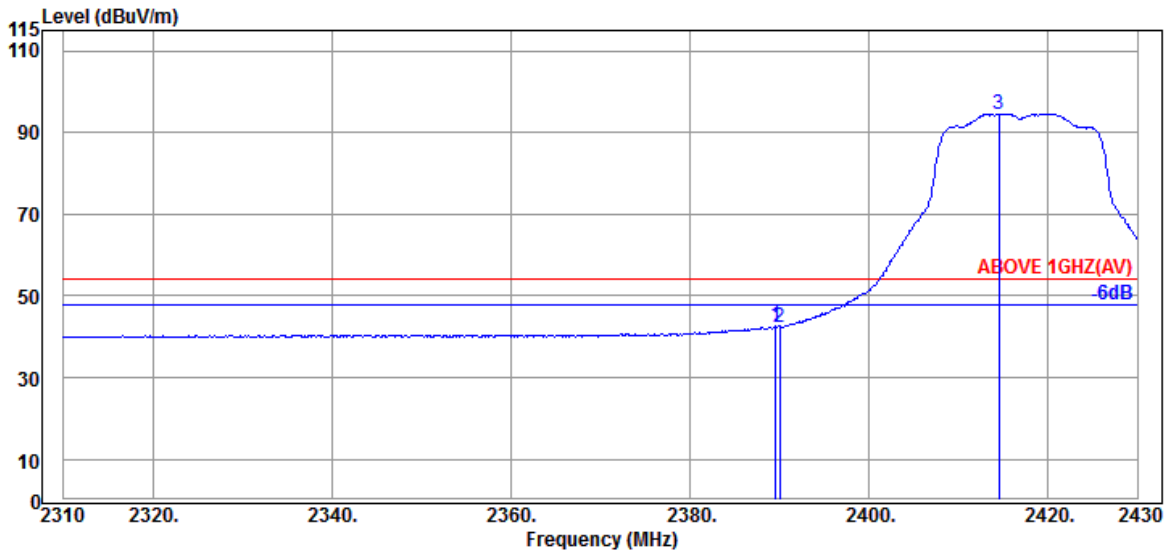


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	6.04	34.53	39.09	42.49	54.00	11.51	Average
2390.040	31.89	6.04	34.54	39.08	42.47	54.00	11.53	Average
@ 2414.520	31.94	6.07	34.54	91.17	94.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

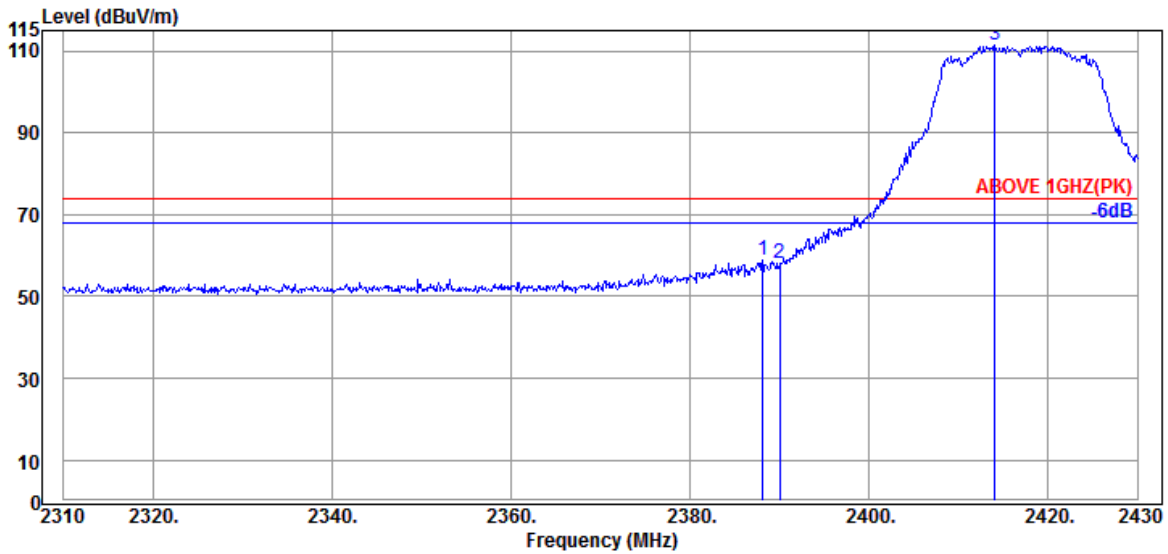

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	31.89	6.04	34.53	55.38	58.78	74.00	15.22	Peak
2390.040	31.89	6.04	34.54	54.87	58.26	74.00	15.74	Peak
@ 2414.040	31.94	6.07	34.54	107.84	111.31	---	---	Peak

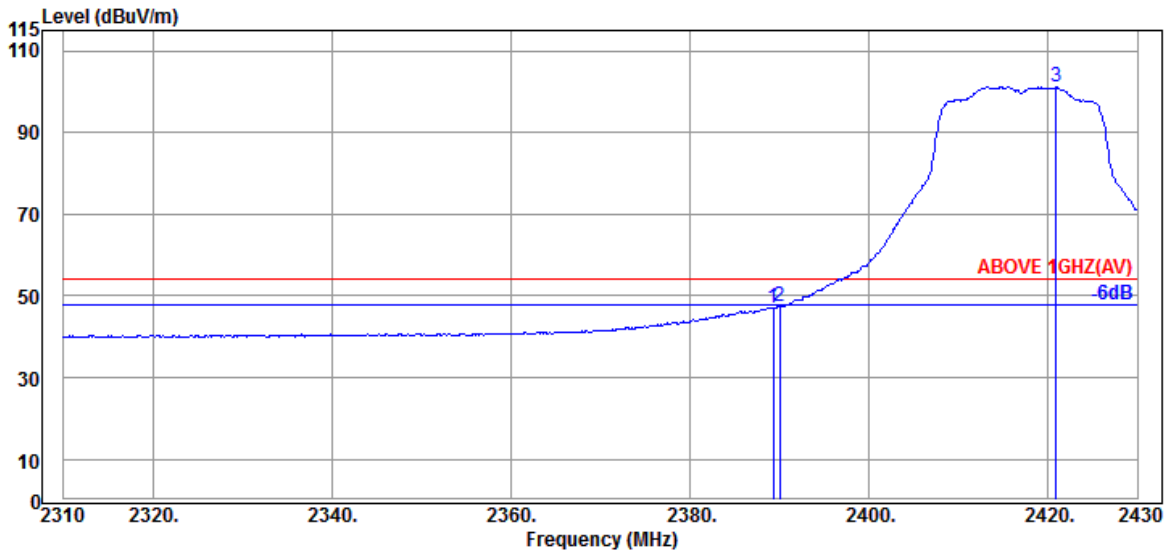


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	6.04	34.53	43.80	47.20	54.00	6.80	Average
2390.040	31.89	6.04	34.54	44.05	47.44	54.00	6.56	Average
@ 2420.880	32.01	6.10	34.54	97.62	101.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

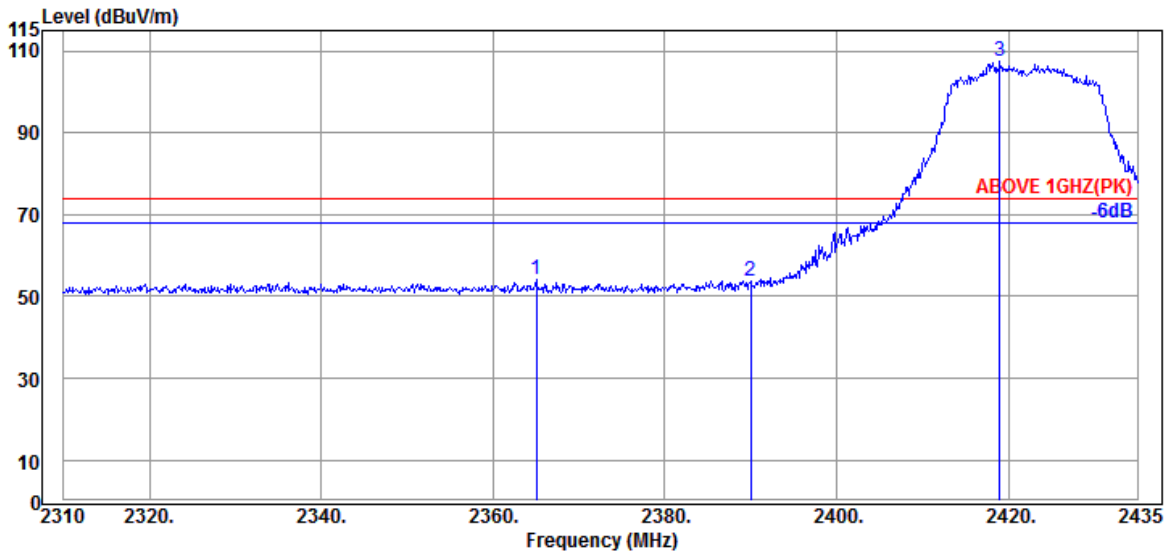

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.000	32.01	5.98	34.53	50.50	53.96	74.00	20.04	Peak
2390.000	31.89	6.04	34.54	50.21	53.60	74.00	20.40	Peak
@ 2419.000	32.01	6.07	34.54	103.93	107.47	---	---	Peak

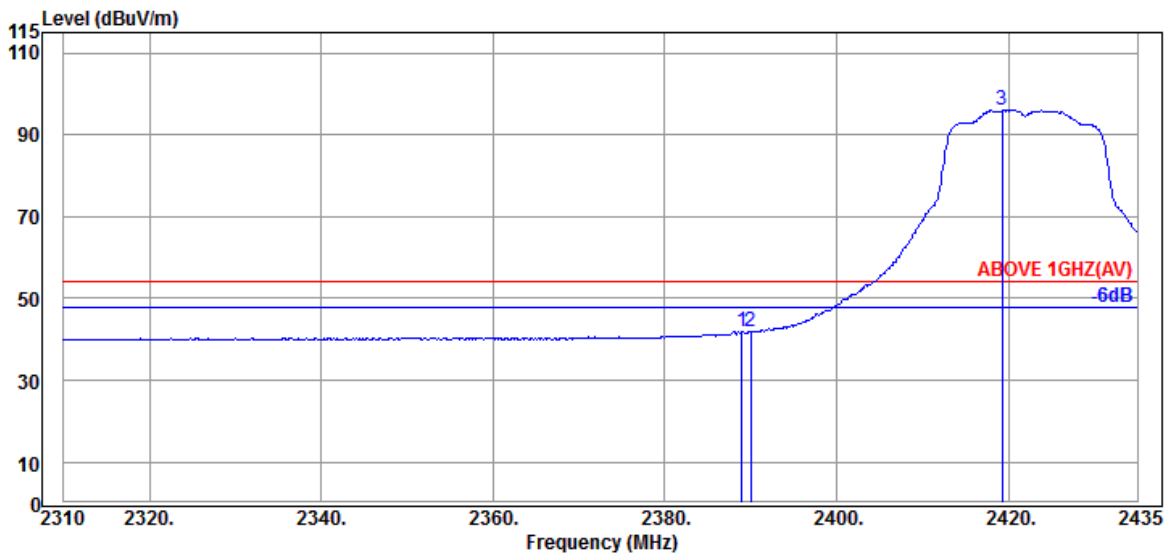


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	31.89	6.04	34.53	38.37	41.77	54.00	12.23	Average
2390.000	31.89	6.04	34.54	38.51	41.90	54.00	12.10	Average
@ 2419.250	32.01	6.07	34.54	92.64	96.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

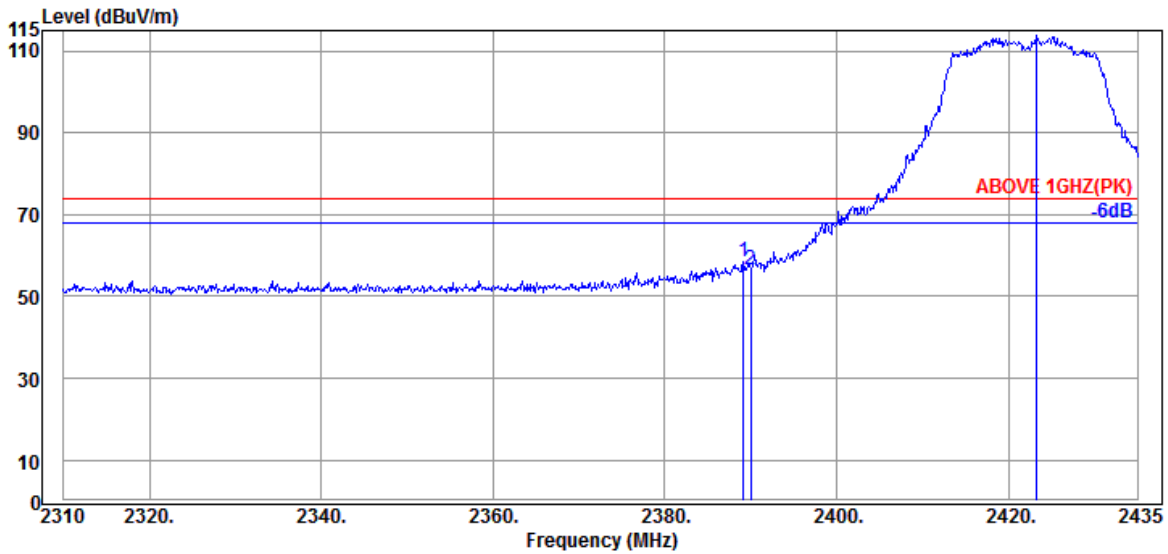

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.125	31.89	6.04	34.53	54.96	58.36	74.00	15.64	Peak
2390.000	31.89	6.04	34.54	53.30	56.69	74.00	17.31	Peak
@ 2423.250	32.01	6.10	34.54	110.17	113.74	---	---	Peak

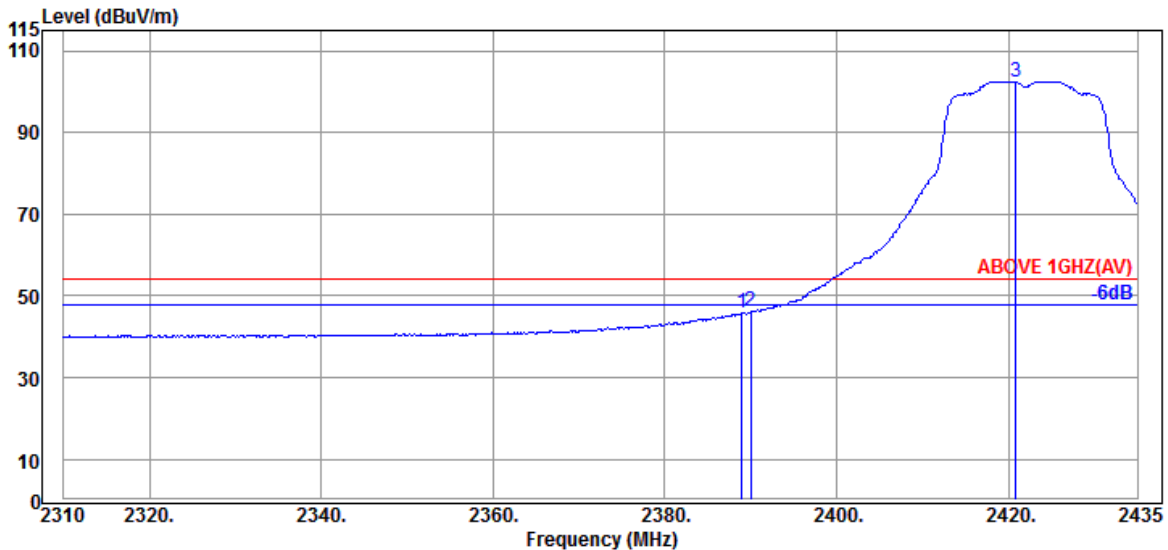


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	31.89	6.04	34.53	42.57	45.97	54.00	8.03	Average
2390.000	31.89	6.04	34.54	42.80	46.19	54.00	7.81	Average
@ 2420.875	32.01	6.10	34.54	98.98	102.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

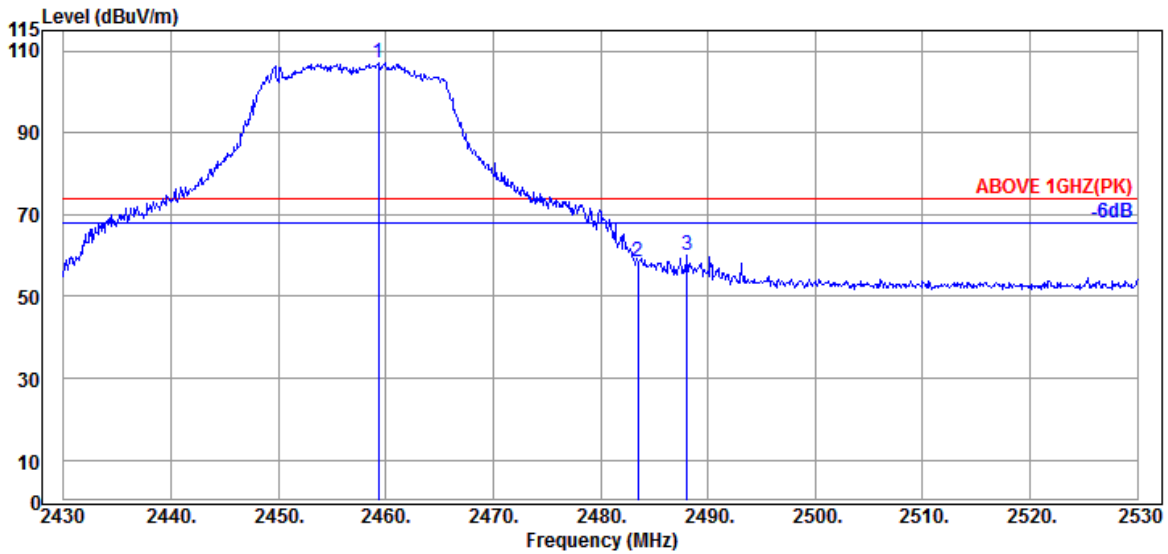

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	32.30	6.15	34.55	103.04	106.94	---	---	Peak
2483.500	32.30	6.18	34.55	54.65	58.58	74.00	15.42	Peak
2488.100	32.30	6.21	34.55	56.30	60.26	74.00	13.74	Peak

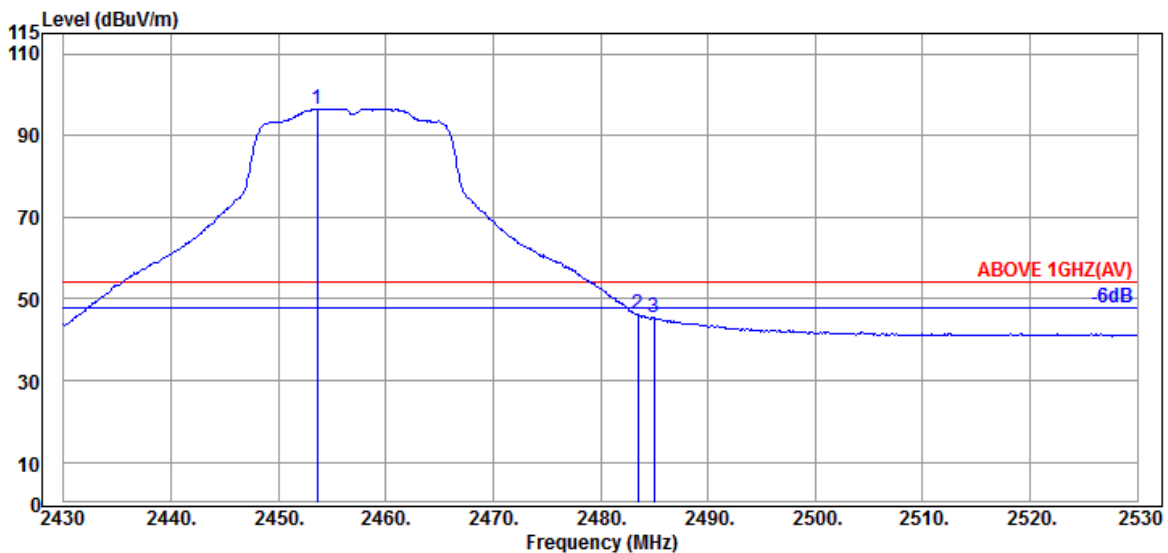


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.600	32.30	6.15	34.55	92.72	96.62	---	---	Average
2483.500	32.30	6.18	34.55	42.41	46.34	54.00	7.66	Average
2485.000	32.30	6.18	34.55	41.49	45.42	54.00	8.58	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

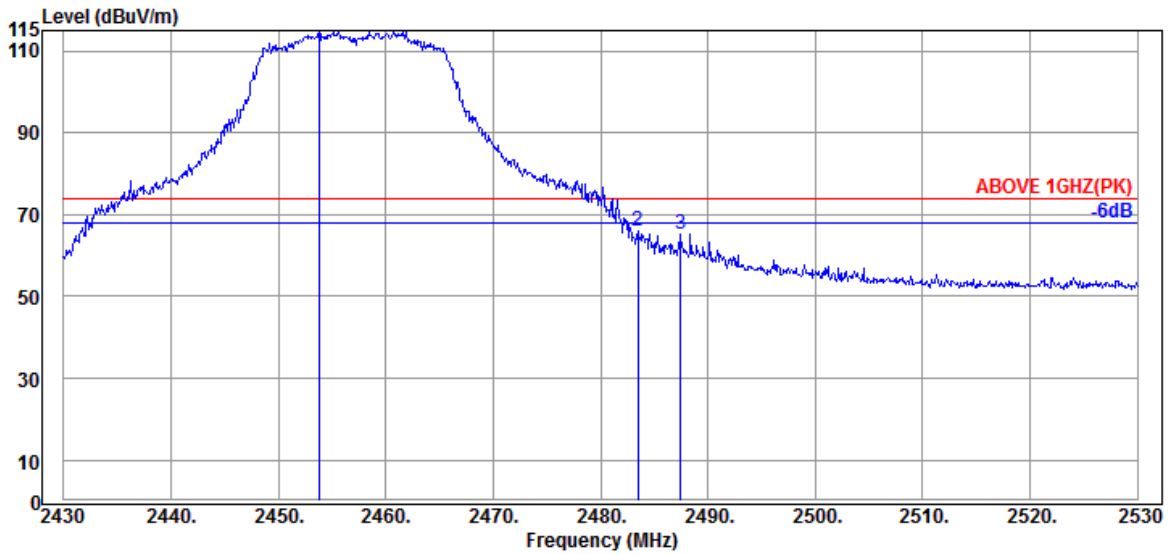

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.800	32.30	6.15	34.55	111.06	114.96	---	---	Peak
2483.500	32.30	6.18	34.55	61.95	65.88	74.00	8.12	Peak
2487.500	32.30	6.21	34.55	61.43	65.39	74.00	8.61	Peak

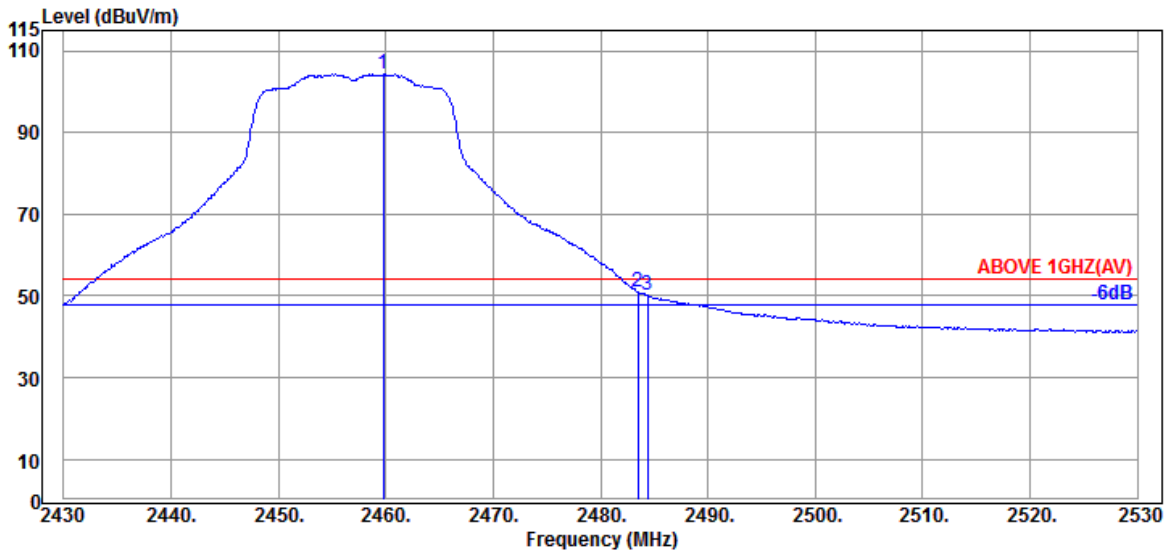


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.30	6.15	34.55	100.40	104.30	---	---	Average
2483.500	32.30	6.18	34.55	46.91	50.84	54.00	3.16	Average
2484.400	32.30	6.18	34.55	46.21	50.14	54.00	3.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

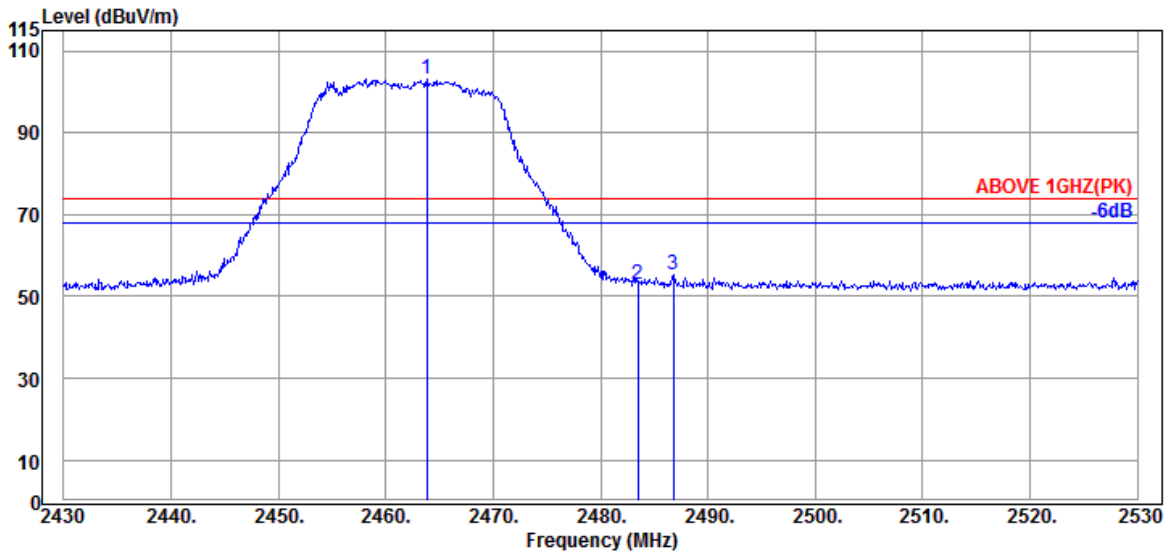

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	32.30	6.15	34.55	99.43	103.33	---	---	Peak
2483.500	32.30	6.18	34.55	49.03	52.96	74.00	21.04	Peak
2486.800	32.30	6.18	34.55	51.31	55.24	74.00	18.76	Peak

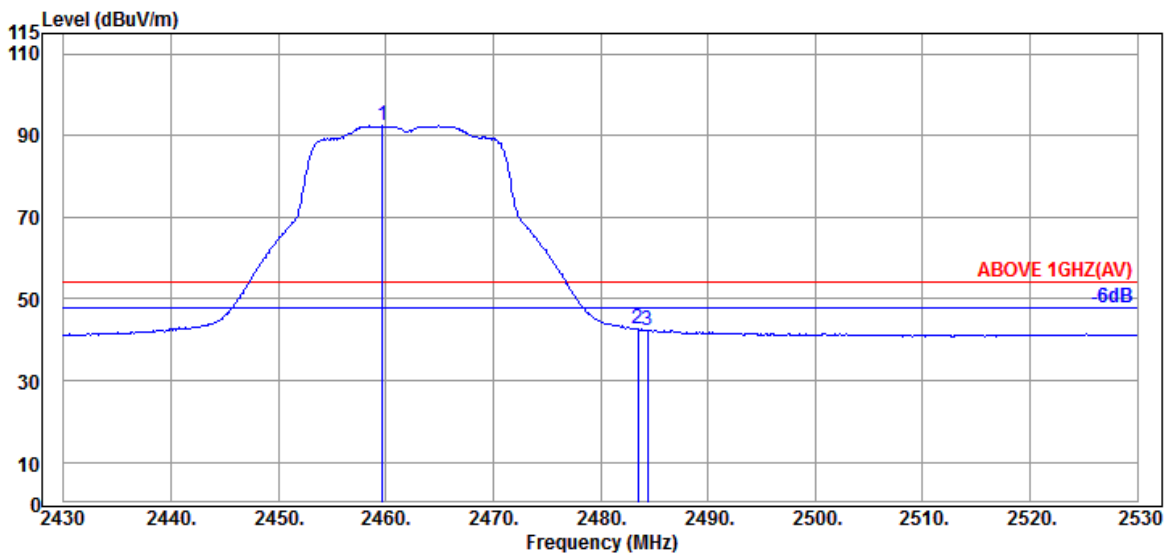


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	32.30	6.15	34.55	88.41	92.31	---	---	Average
2483.500	32.30	6.18	34.55	38.72	42.65	54.00	11.35	Average
2484.400	32.30	6.18	34.55	38.37	42.30	54.00	11.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

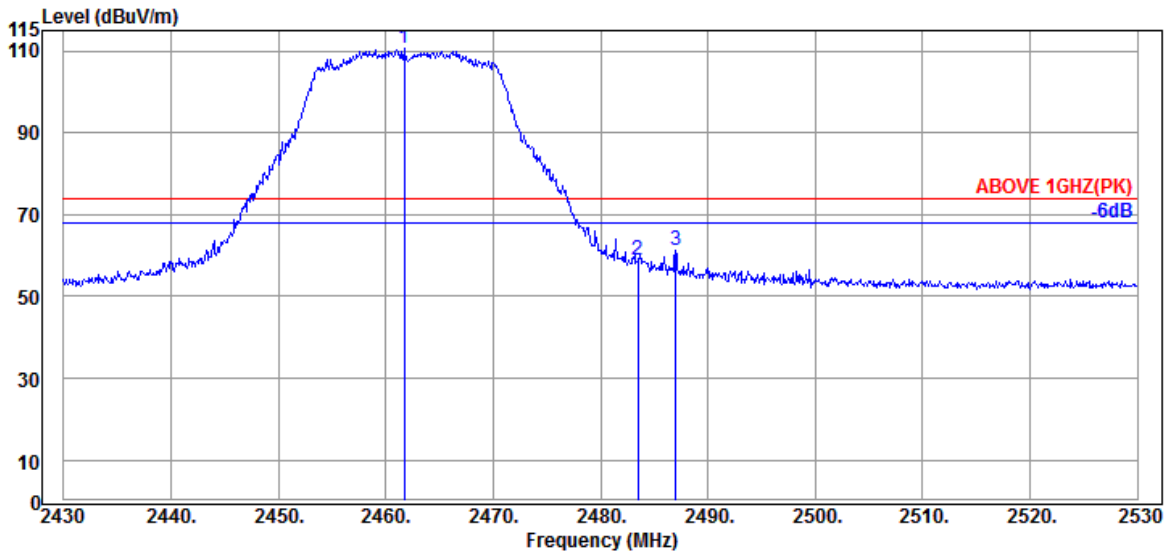

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.700	32.30	6.15	34.55	106.60	110.50	---	---	Peak
2483.500	32.30	6.18	34.55	54.84	58.77	74.00	15.23	Peak
2487.000	32.30	6.18	34.55	57.32	61.25	74.00	12.75	Peak

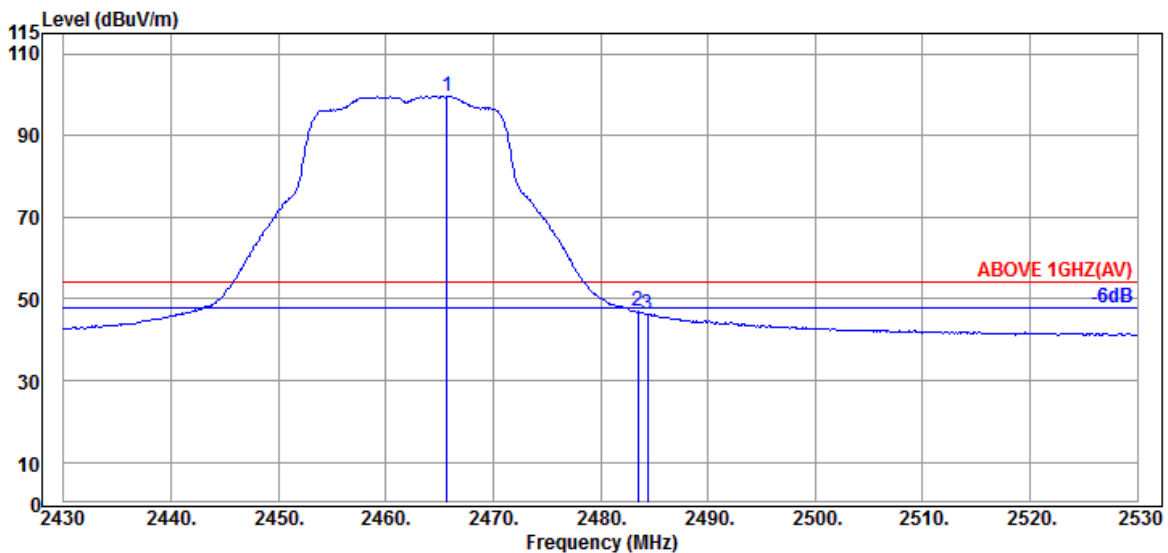


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	32.30	6.15	34.55	95.73	99.63	---	---	Average
2483.500	32.30	6.18	34.55	42.99	46.92	54.00	7.08	Average
2484.400	32.30	6.18	34.55	42.36	46.29	54.00	7.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

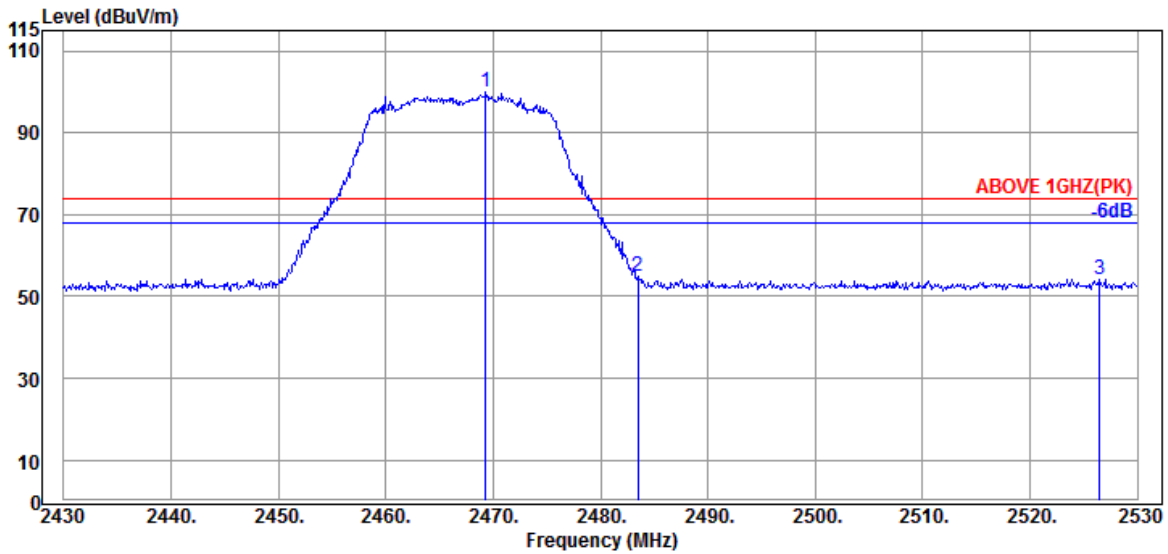

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	32.30	6.15	34.55	96.18	100.08	---	---	Peak
2483.500	32.30	6.18	34.55	50.98	54.91	74.00	19.09	Peak
2526.500	32.41	6.25	34.57	49.98	54.07	74.00	19.93	Peak

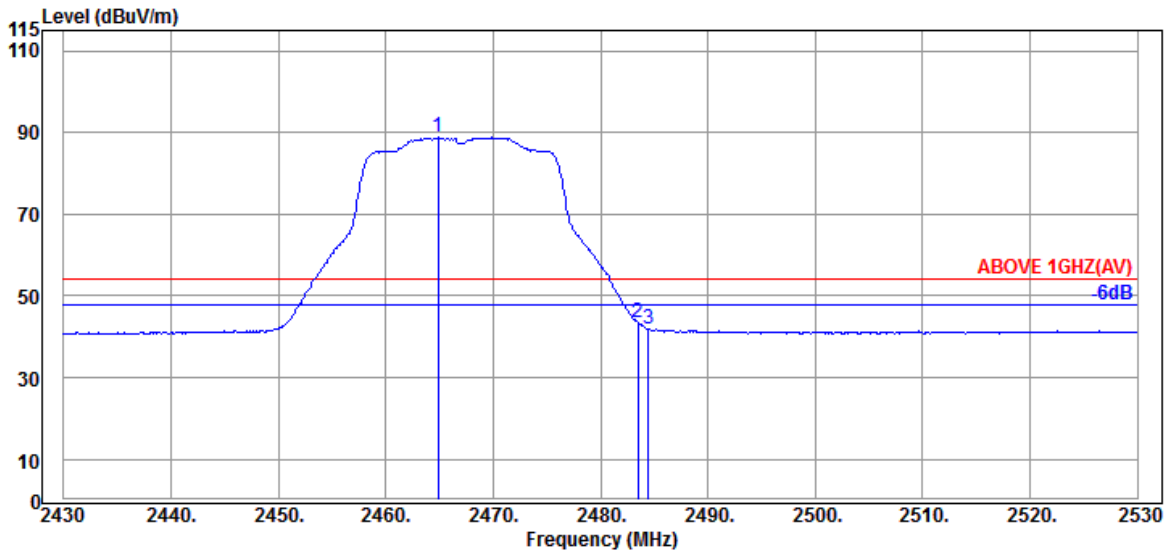


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	32.30	6.15	34.55	84.90	88.80	---	---	Average
2483.500	32.30	6.18	34.55	39.47	43.40	54.00	10.60	Average
2484.500	32.30	6.18	34.55	38.08	42.01	54.00	11.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

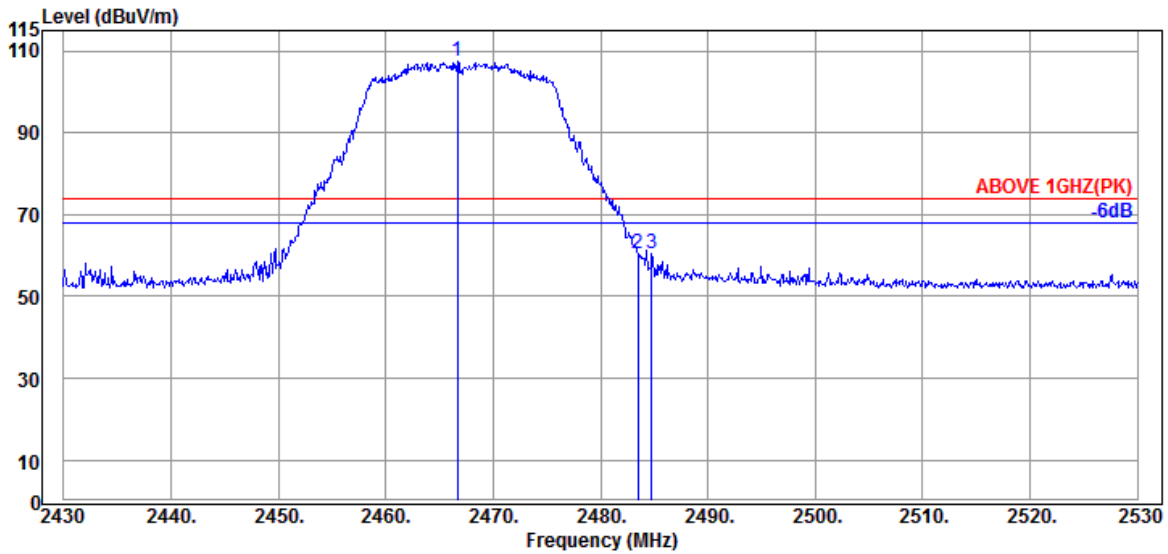

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.700	32.30	6.15	34.55	103.41	107.31	---	---	Peak
2483.500	32.30	6.18	34.55	56.51	60.44	74.00	13.56	Peak
2484.800	32.30	6.18	34.55	56.43	60.36	74.00	13.64	Peak

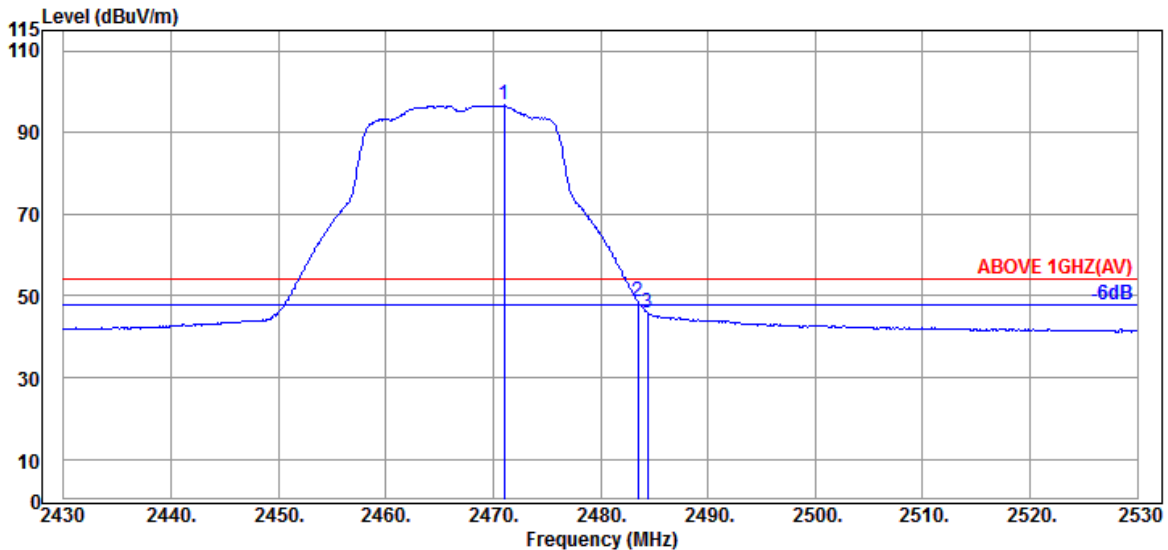


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	6.18	34.55	92.70	96.63	---	---	Average
2483.500	32.30	6.18	34.55	44.82	48.75	54.00	5.25	Average
2484.400	32.30	6.18	34.55	41.89	45.82	54.00	8.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

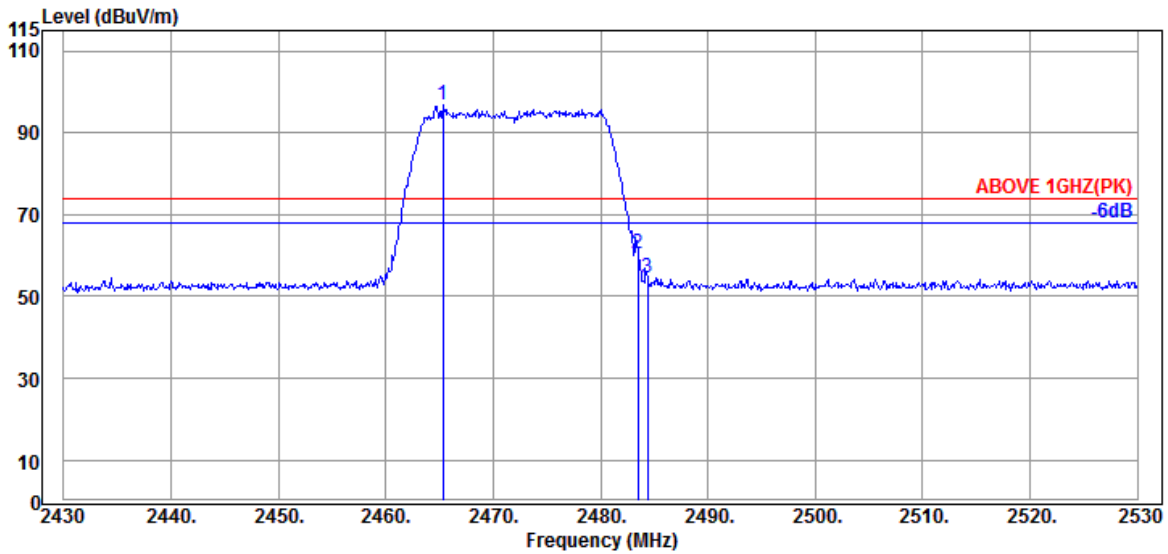

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	32.30	6.15	34.55	92.75	96.65	---	---	Peak
2483.500	32.30	6.18	34.55	56.35	60.28	74.00	13.72	Peak
2484.400	32.30	6.18	34.55	50.74	54.67	74.00	19.33	Peak

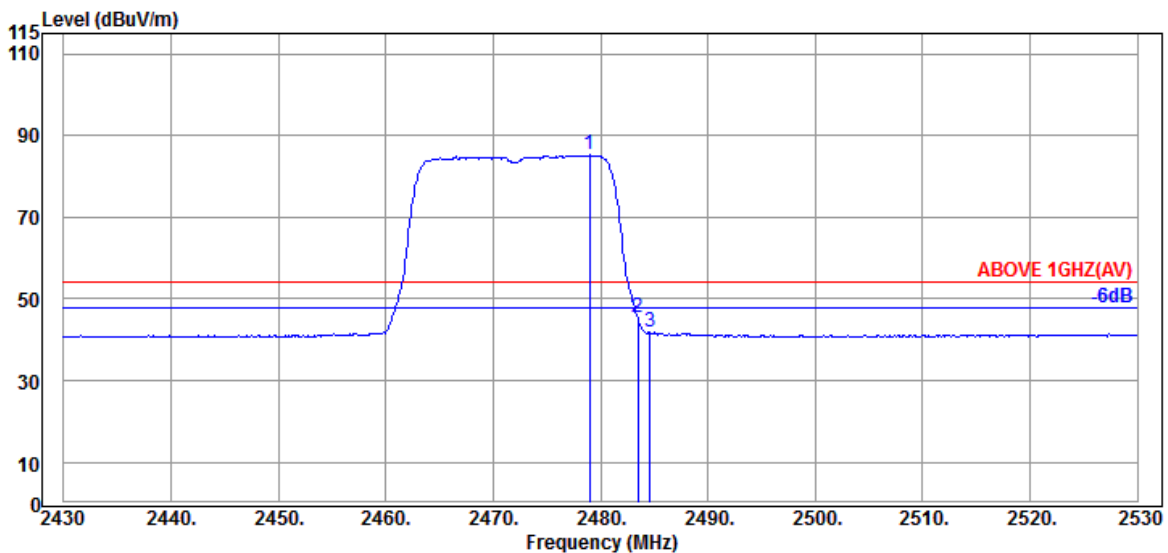


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	6.18	34.55	81.29	85.22	---	---	Average
2483.500	32.30	6.18	34.55	41.47	45.40	54.00	8.60	Average
2484.600	32.30	6.18	34.55	37.95	41.88	54.00	12.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

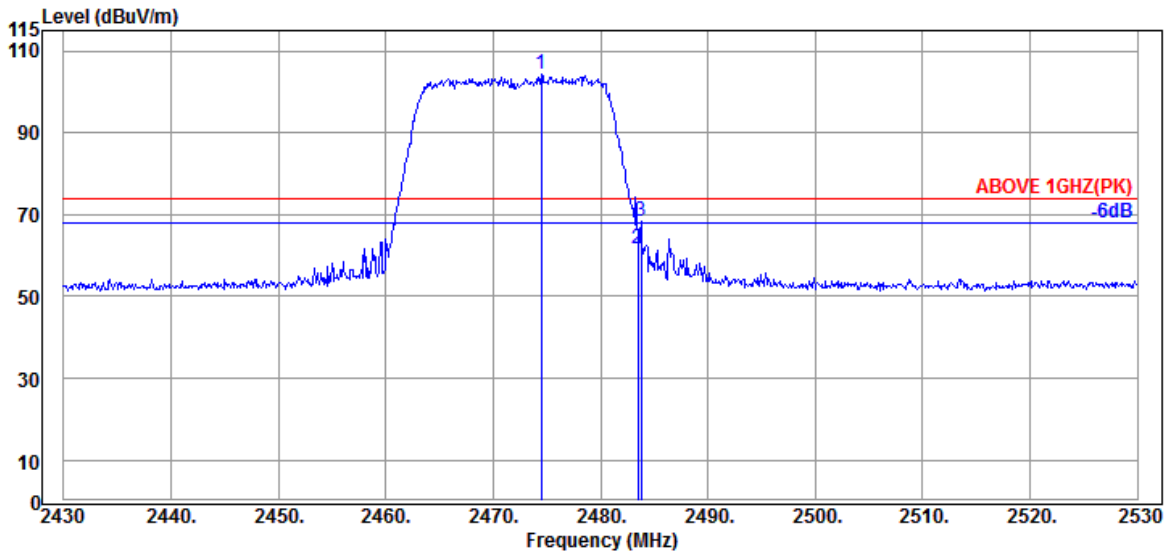

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	32.30	6.18	34.55	100.22	104.15	---	---	Peak
2483.500	32.30	6.18	34.55	57.86	61.79	74.00	12.21	Peak
2483.800	32.30	6.18	34.55	64.51	68.44	74.00	5.56	Peak

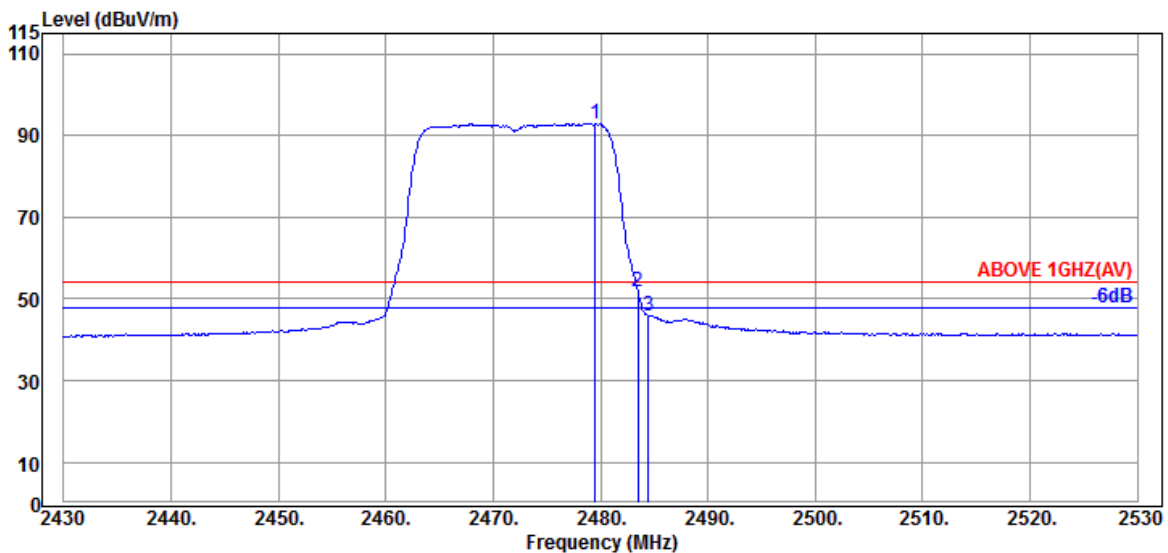


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	6.18	34.55	88.87	92.80	---	---	Average
2483.500	32.30	6.18	34.55	47.83	51.76	54.00	2.24	Average
2484.500	32.30	6.18	34.55	42.02	45.95	54.00	8.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

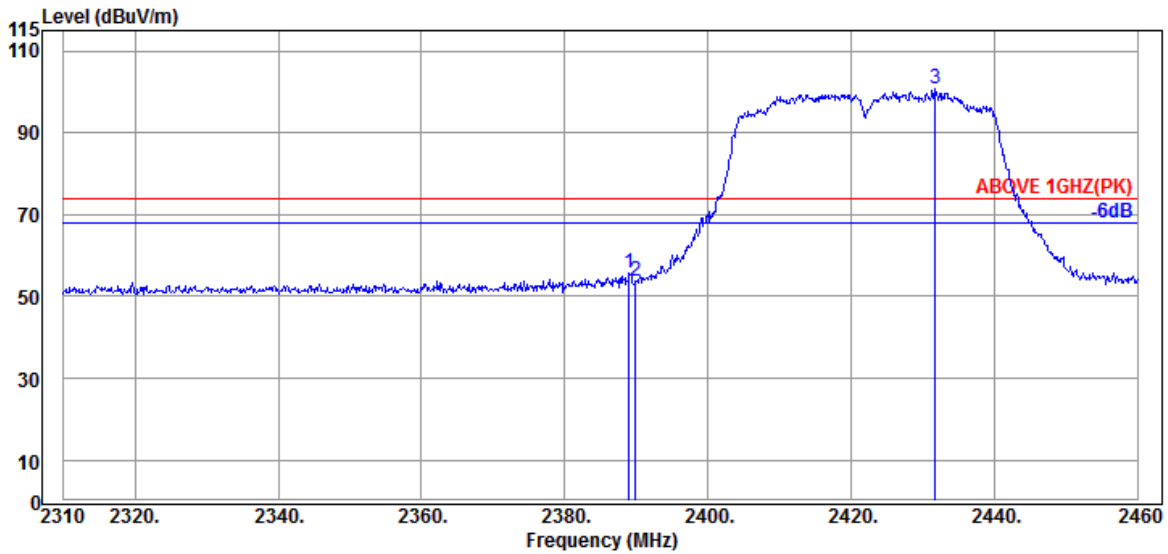

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2389.050	31.89	6.04	34.53	52.50	55.90	74.00	18.10	Peak
2389.950	31.89	6.04	34.54	50.34	53.73	74.00	20.27	Peak
@ 2431.800	32.09	6.10	34.54	97.26	100.91	---	---	Peak

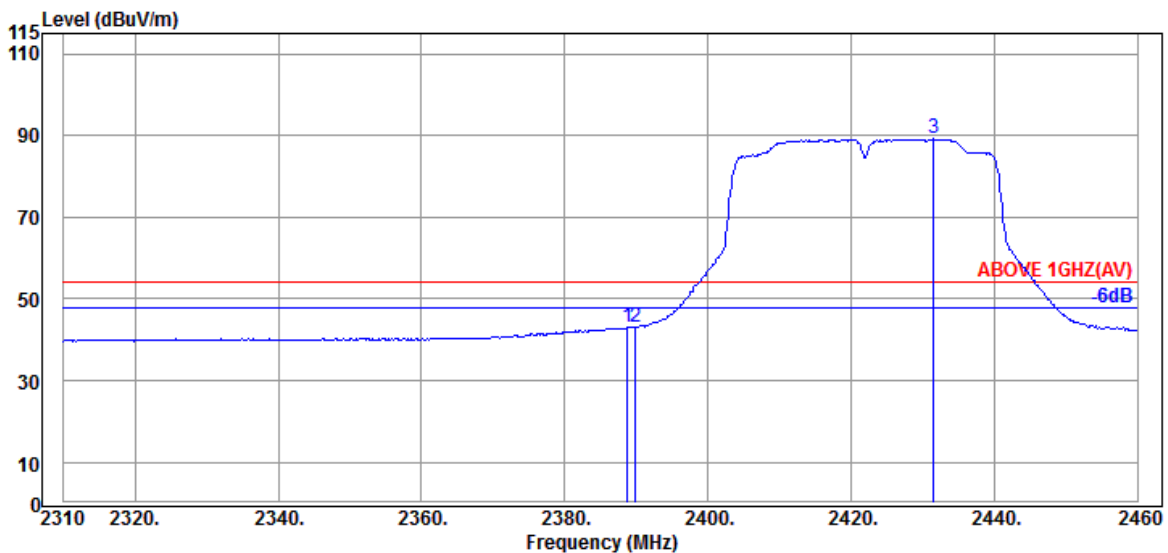


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	6.04	34.53	39.84	43.24	54.00	10.76	Average
2389.950	31.89	6.04	34.54	39.81	43.20	54.00	10.80	Average
@ 2431.500	32.09	6.10	34.54	85.50	89.15	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

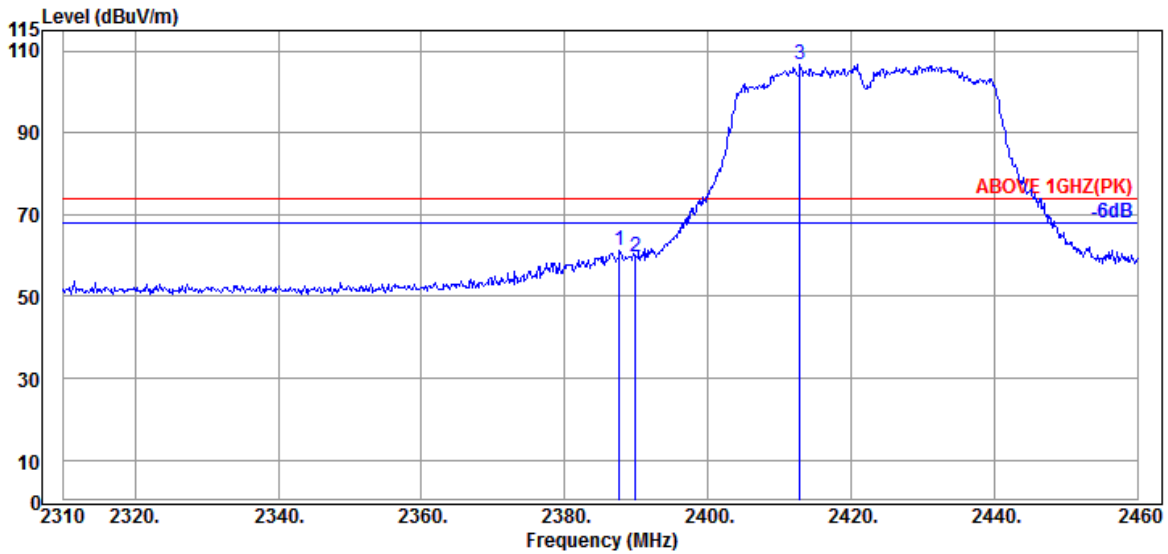

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	31.89	6.04	34.53	57.68	61.08	74.00	12.92	Peak
2389.950	31.89	6.04	34.54	56.31	59.70	74.00	14.30	Peak
@ 2412.900	31.94	6.07	34.54	103.29	106.76	---	---	Peak

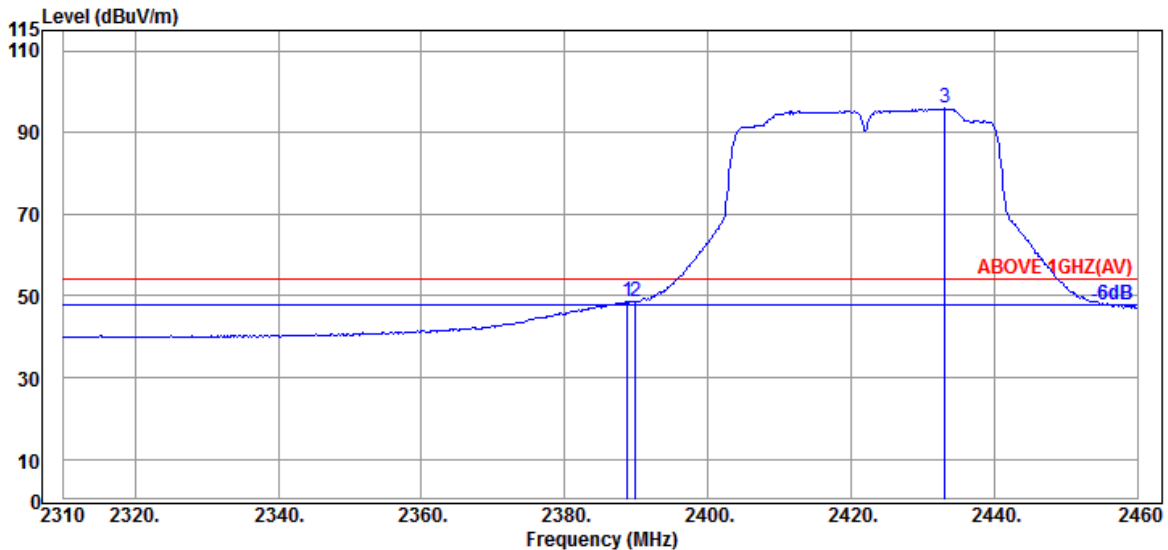


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	6.04	34.53	45.33	48.73	54.00	5.27	Average
2389.950	31.89	6.04	34.54	45.21	48.60	54.00	5.40	Average
@ 2433.150	32.16	6.10	34.54	92.12	95.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

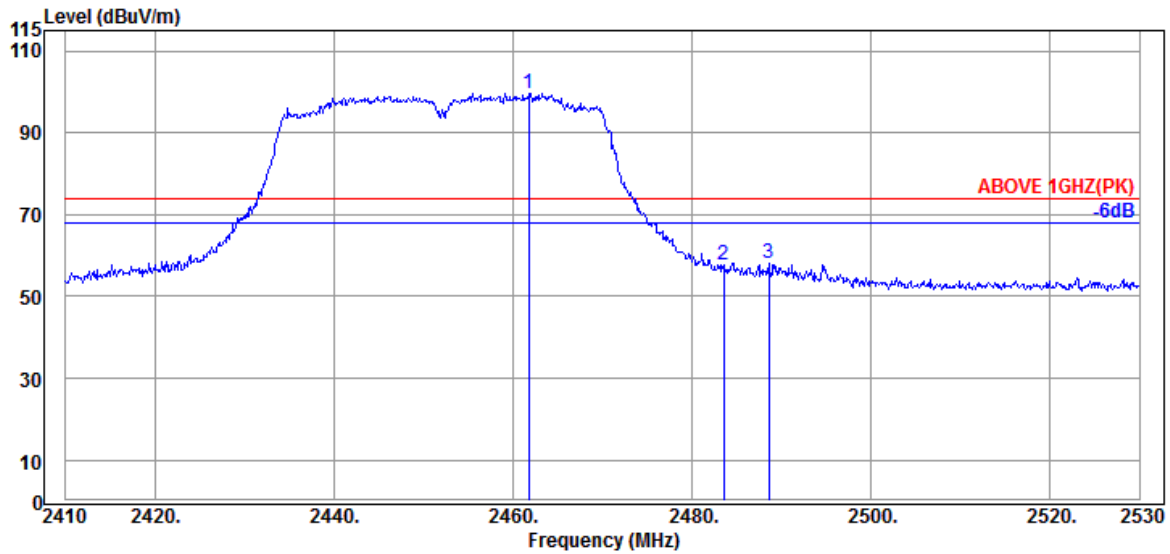

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.720	32.30	6.15	34.55	95.87	99.77	---	---	Peak
2483.560	32.30	6.18	34.55	53.58	57.51	74.00	16.49	Peak
2488.600	32.30	6.21	34.55	54.27	58.23	74.00	15.77	Peak

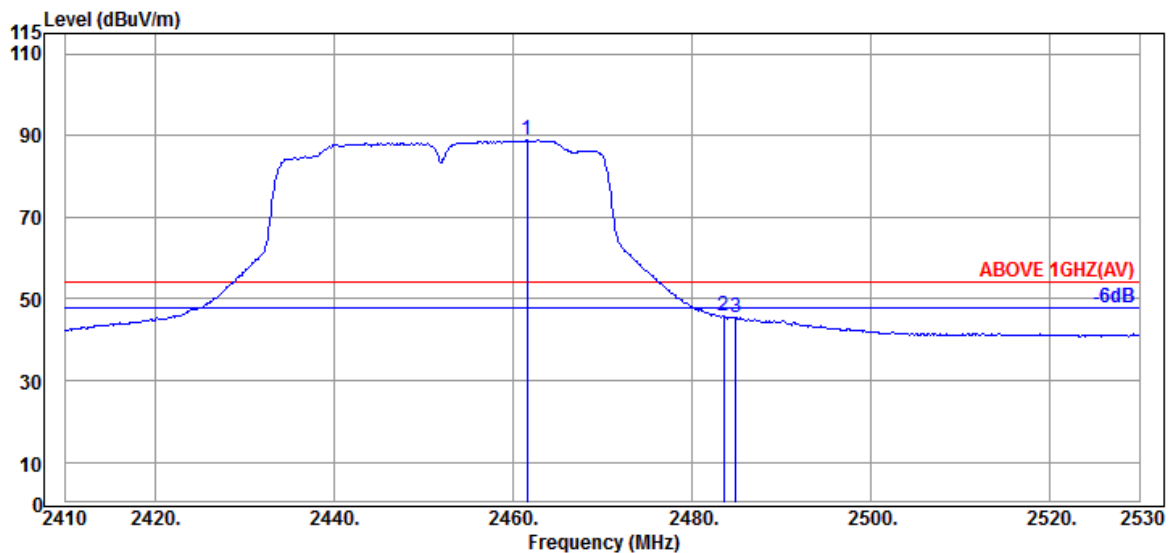


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.600	32.30	6.15	34.55	84.96	88.86	---	---	Average
2483.560	32.30	6.18	34.55	41.72	45.65	54.00	8.35	Average
2484.880	32.30	6.18	34.55	41.58	45.51	54.00	8.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

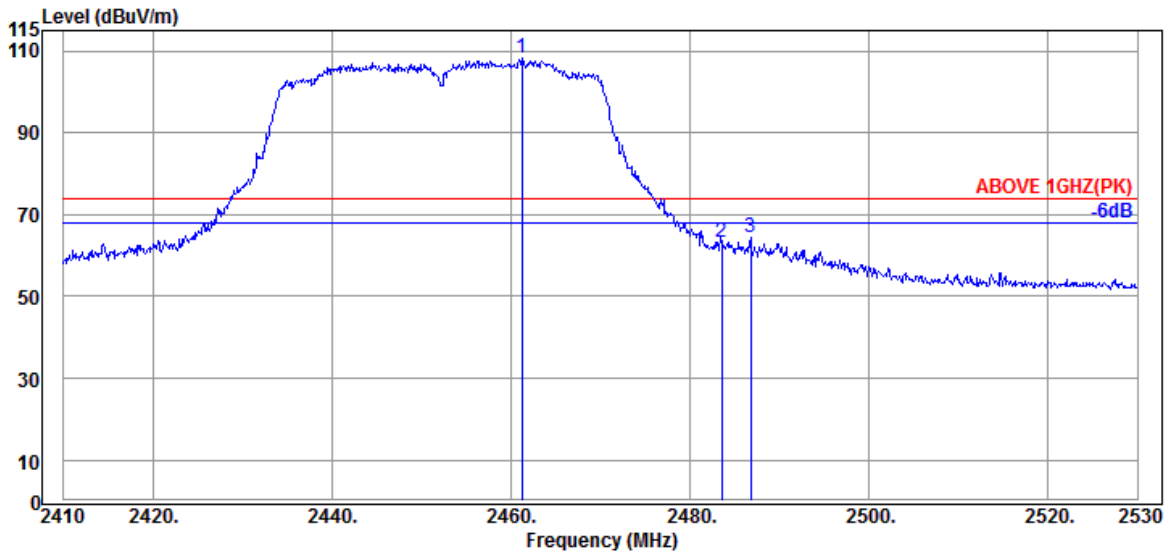

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.240	32.30	6.15	34.55	104.32	108.22	---	---	Peak
2483.560	32.30	6.18	34.55	59.42	63.35	74.00	10.65	Peak
2486.800	32.30	6.18	34.55	60.58	64.51	74.00	9.49	Peak

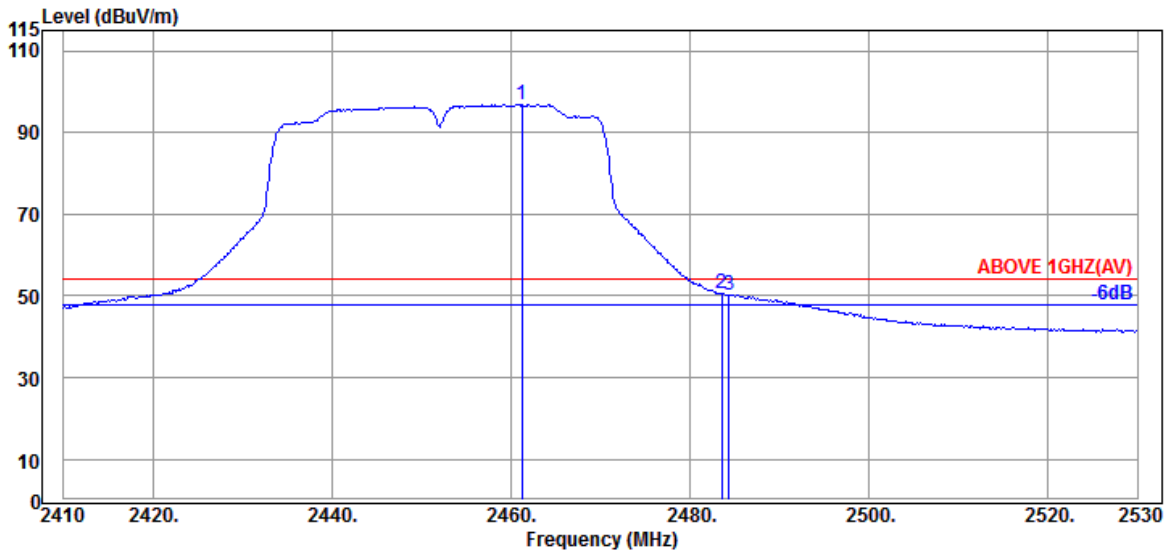


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.240	32.30	6.15	34.55	92.97	96.87	---	---	Average
2483.560	32.30	6.18	34.55	46.72	50.65	54.00	3.35	Average
2484.400	32.30	6.18	34.55	46.42	50.35	54.00	3.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

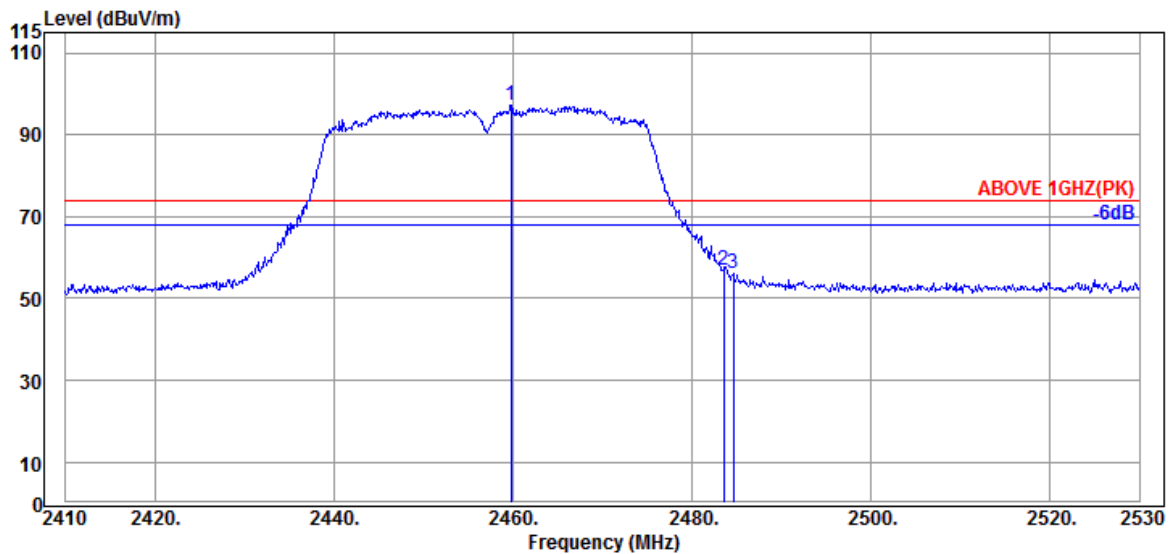

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.30	6.15	34.55	93.40	97.30	---	---	Peak
2483.560	32.30	6.18	34.55	52.83	56.76	74.00	17.24	Peak
2484.640	32.30	6.18	34.55	52.03	55.96	74.00	18.04	Peak

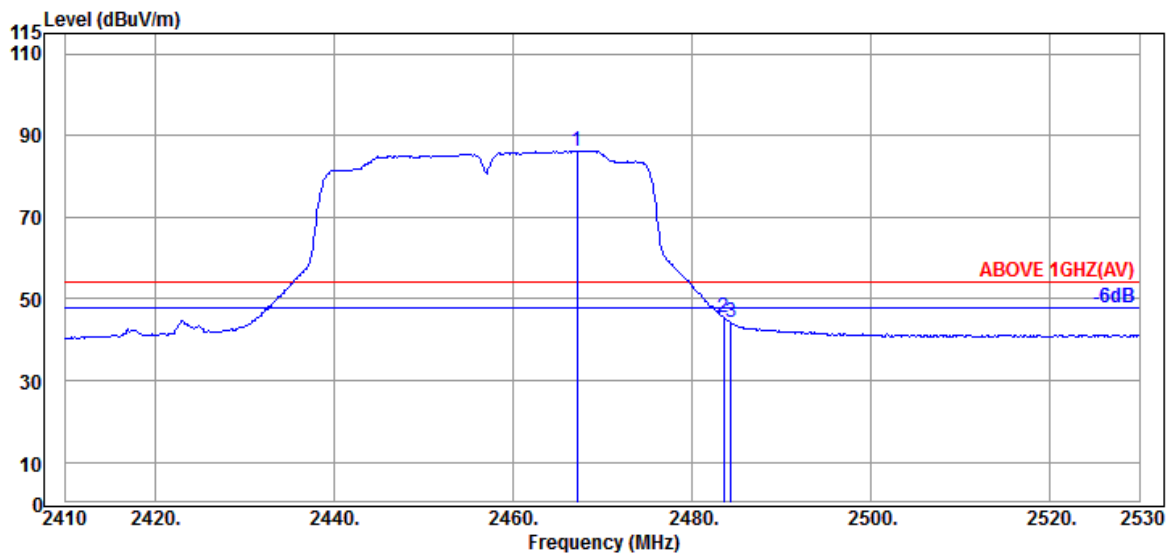


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.120	32.30	6.15	34.55	82.44	86.34	---	---	Average
2483.560	32.30	6.18	34.55	41.63	45.56	54.00	8.44	Average
2484.000	28.01	6.18	33.11	41.65	42.73	54.00	11.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

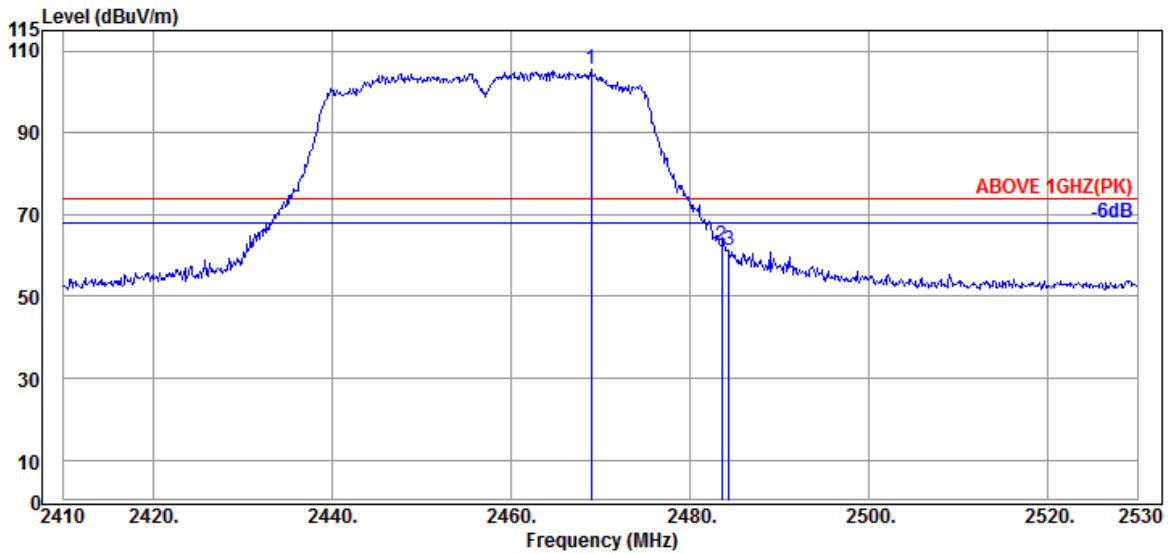

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.920	32.30	6.15	34.55	101.43	105.33	---	---	Peak
2483.560	32.30	6.18	34.55	58.68	62.61	74.00	11.39	Peak
2484.400	32.30	6.18	34.55	57.51	61.44	74.00	12.56	Peak

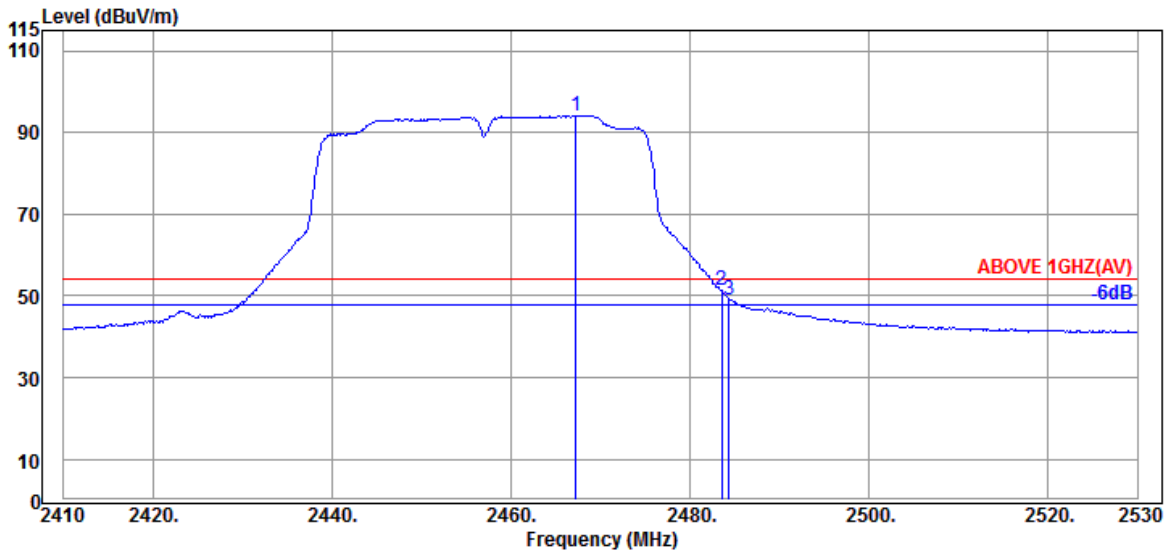


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.240	32.30	6.15	34.55	90.27	94.17	---	---	Average
2483.560	32.30	6.18	34.55	47.27	51.20	54.00	2.80	Average
2484.400	32.30	6.18	34.55	45.17	49.10	54.00	4.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

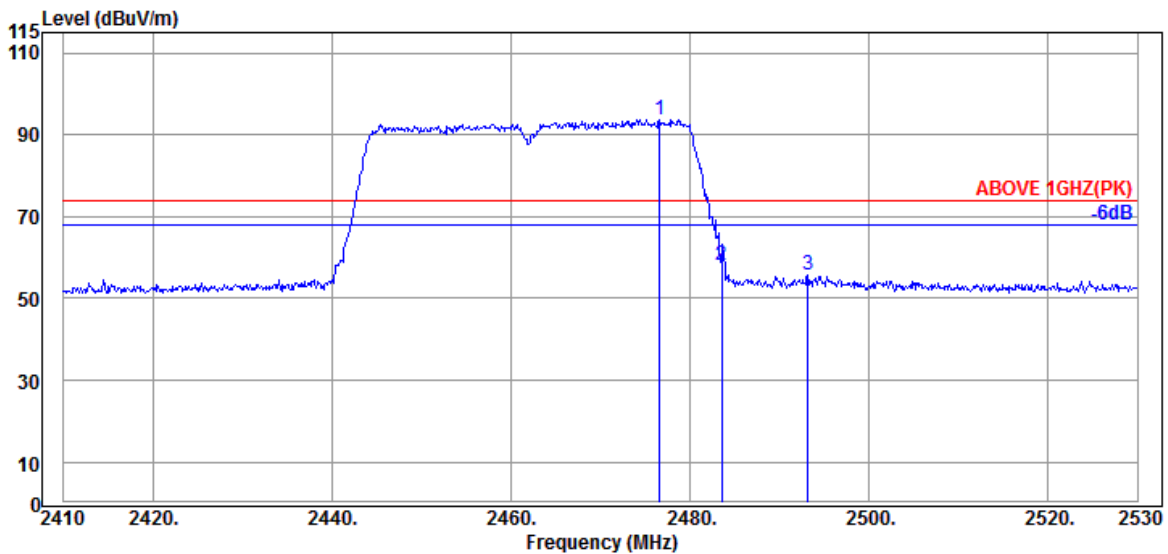

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	32.30	6.18	34.55	89.79	93.72	---	---	Peak
2483.560	32.30	6.18	34.55	54.10	58.03	74.00	15.97	Peak
2493.160	32.30	6.21	34.56	51.62	55.57	74.00	18.43	Peak

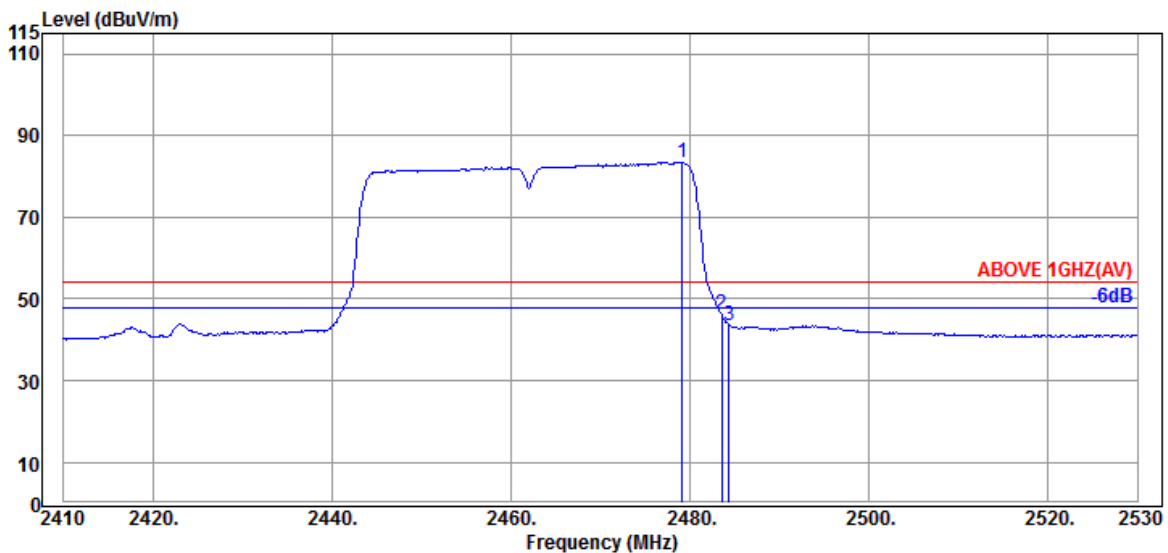


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.120	32.30	6.18	34.55	79.55	83.48	---	---	Average
2483.560	32.30	6.18	34.55	42.17	46.10	54.00	7.90	Average
2484.400	32.30	6.18	34.55	39.62	43.55	54.00	10.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

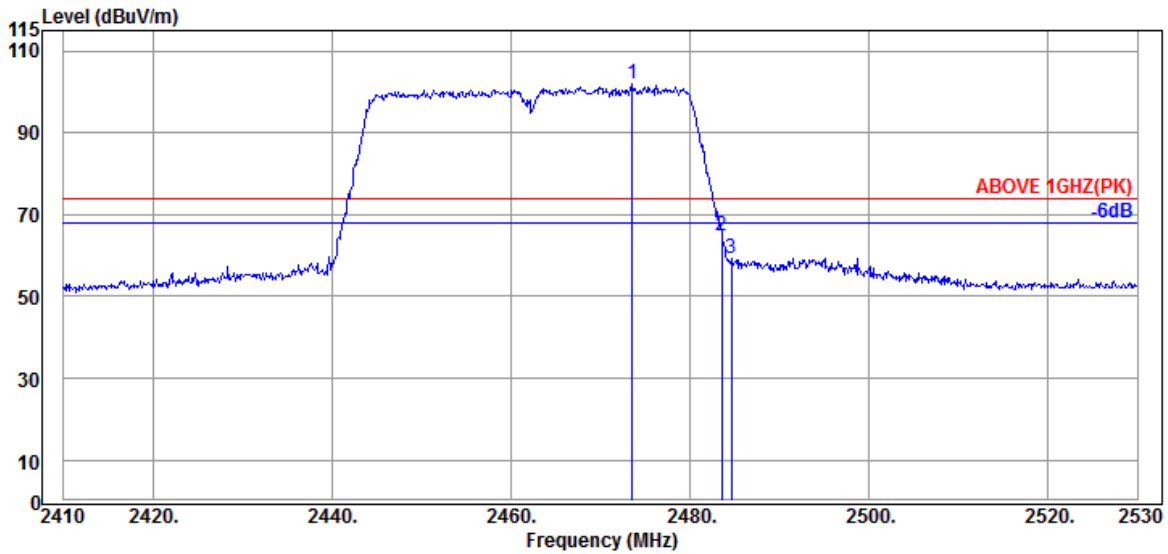

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.600	32.30	6.18	34.55	98.13	102.06	---	---	Peak
2483.560	32.30	6.18	34.55	61.05	64.98	74.00	9.02	Peak
2484.640	32.30	6.18	34.55	55.42	59.35	74.00	14.65	Peak

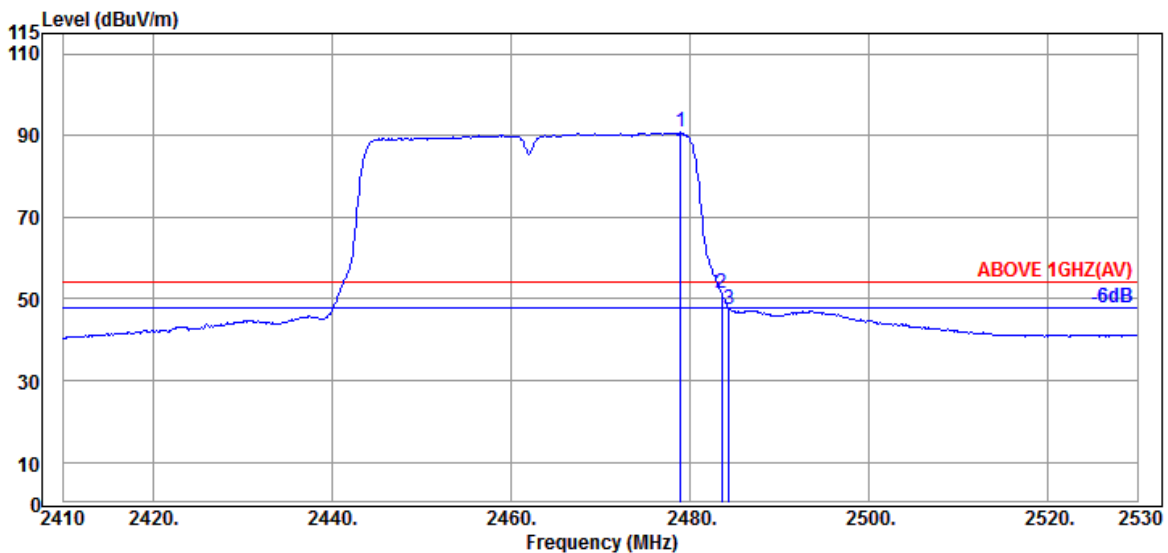


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.000	32.30	6.18	34.55	86.95	90.88	---	---	Average
2483.560	32.30	6.18	34.55	47.57	51.50	54.00	2.50	Average
2484.400	32.30	6.18	34.55	43.56	47.49	54.00	6.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

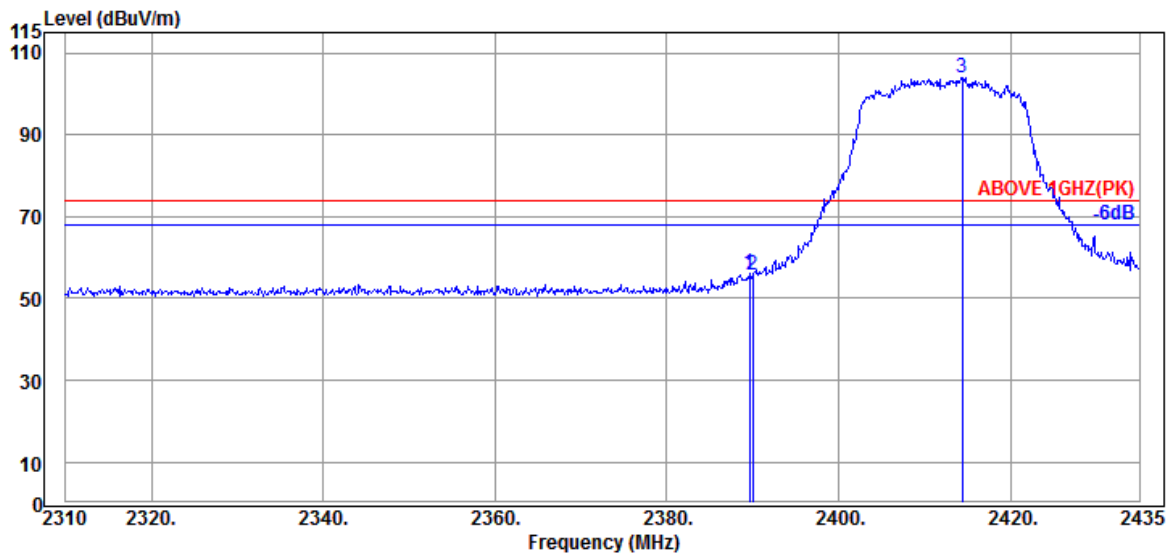

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	52.58	55.98	74.00	18.02	Peak
2390.000	31.89	6.04	34.54	52.39	55.78	74.00	18.22	Peak
@ 2414.375	31.94	6.07	34.54	100.57	104.04	---	---	Peak

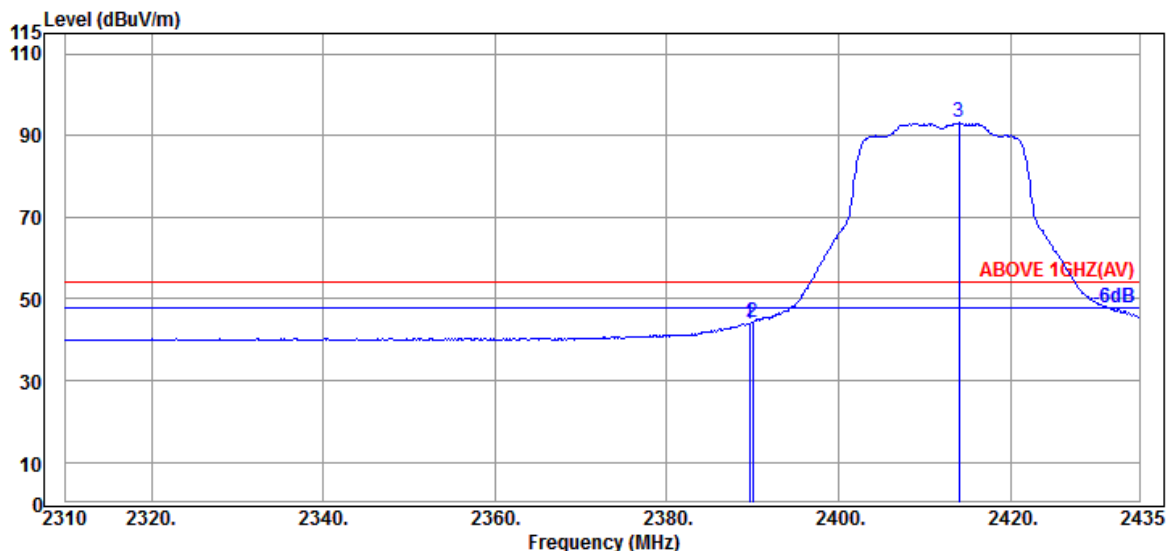


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	40.64	44.04	54.00	9.96	Average
2390.000	31.89	6.04	34.54	40.93	44.32	54.00	9.68	Average
@ 2414.000	31.94	6.07	34.54	89.62	93.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

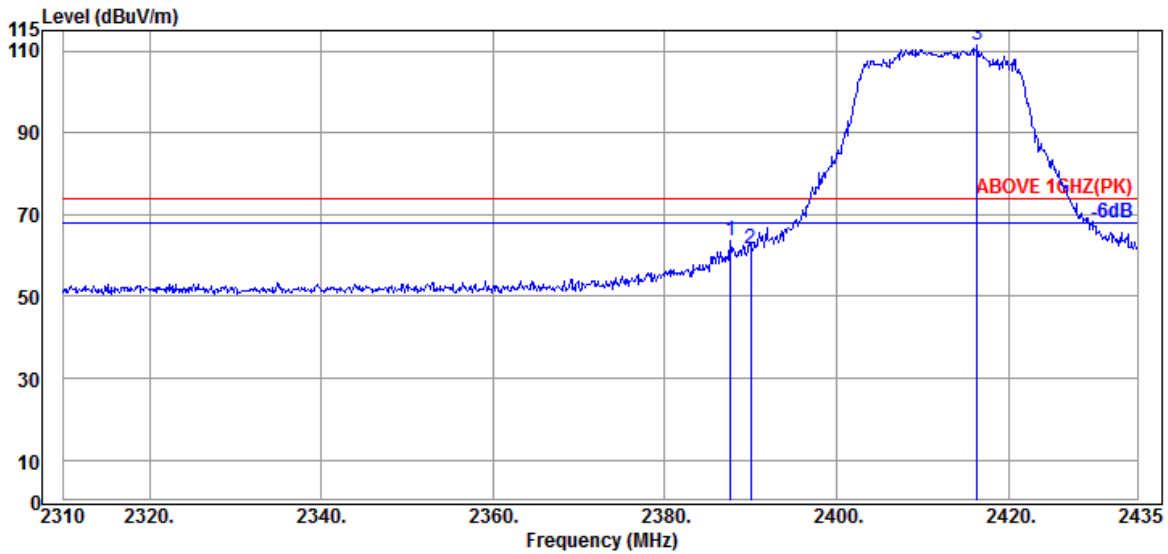

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.625	31.89	6.04	34.53	60.36	63.76	74.00	10.24	Peak
2390.000	31.89	6.04	34.54	58.41	61.80	74.00	12.20	Peak
@ 2416.375	31.94	6.07	34.54	108.10	111.57	---	---	Peak

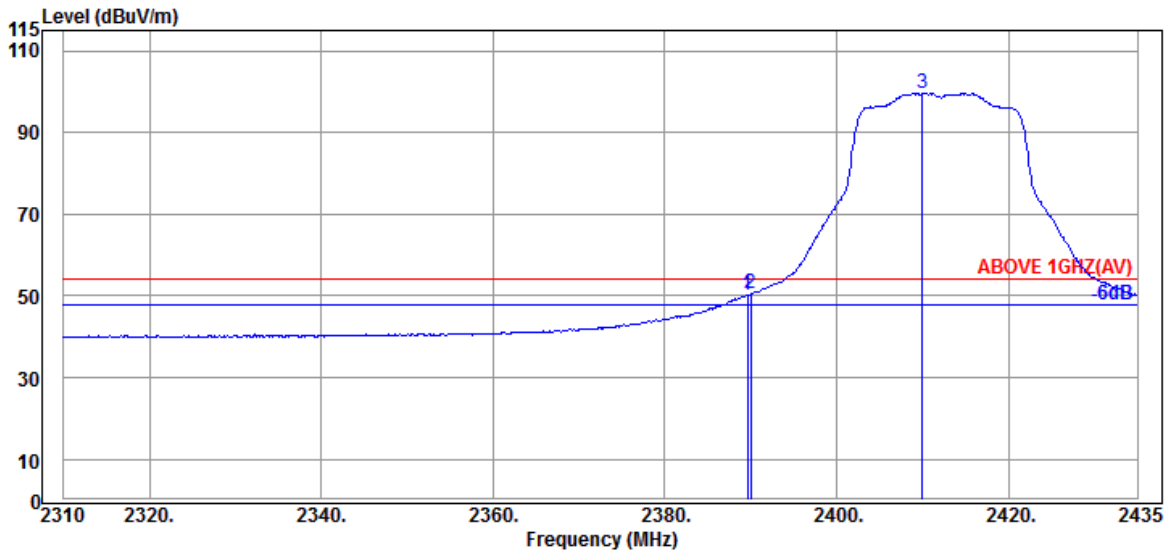


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	46.93	50.33	54.00	3.67	Average
2390.000	31.89	6.04	34.54	47.13	50.52	54.00	3.48	Average
@ 2410.000	31.87	6.07	34.54	96.19	99.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

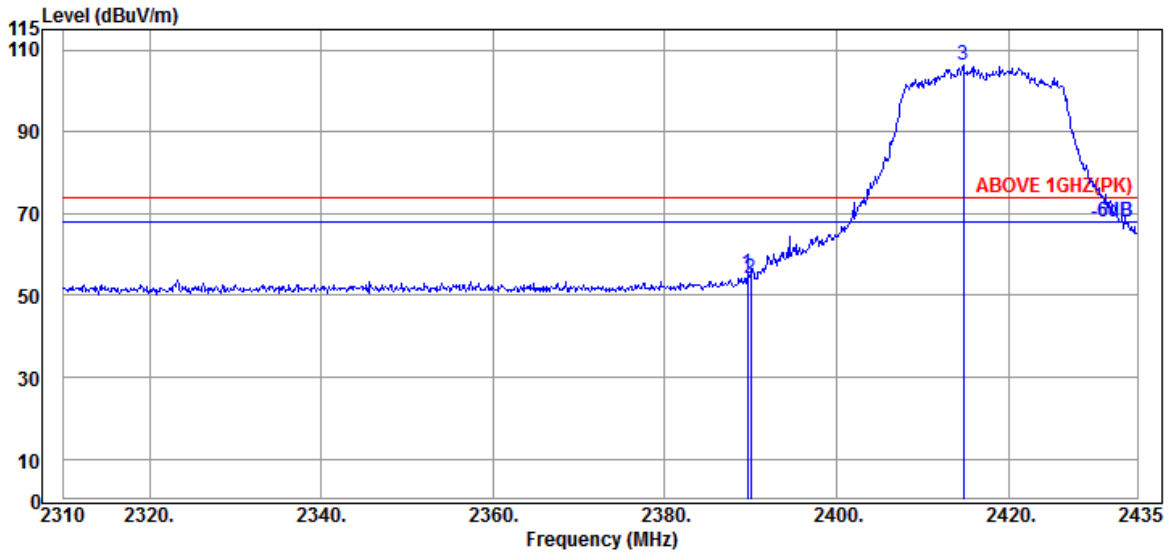

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	52.05	55.45	74.00	18.55	Peak
2390.000	31.89	6.04	34.54	50.77	54.16	74.00	19.84	Peak
@ 2414.750	31.94	6.07	34.54	102.82	106.29	---	---	Peak

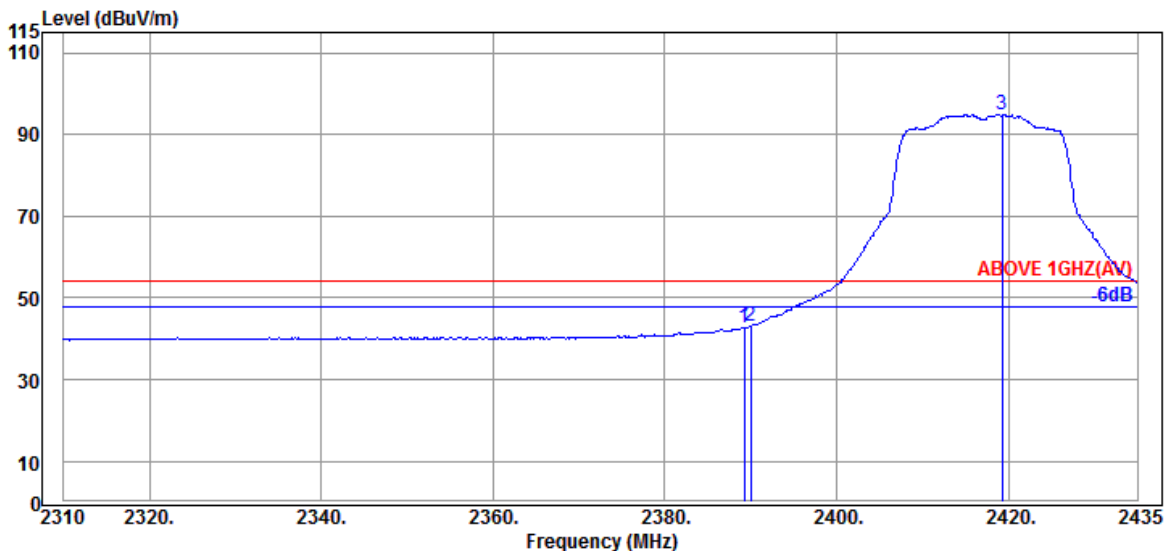


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	31.89	6.04	34.53	39.45	42.85	54.00	11.15	Average
2390.000	31.89	6.04	34.54	39.74	43.13	54.00	10.87	Average
@ 2419.250	32.01	6.07	34.54	91.25	94.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

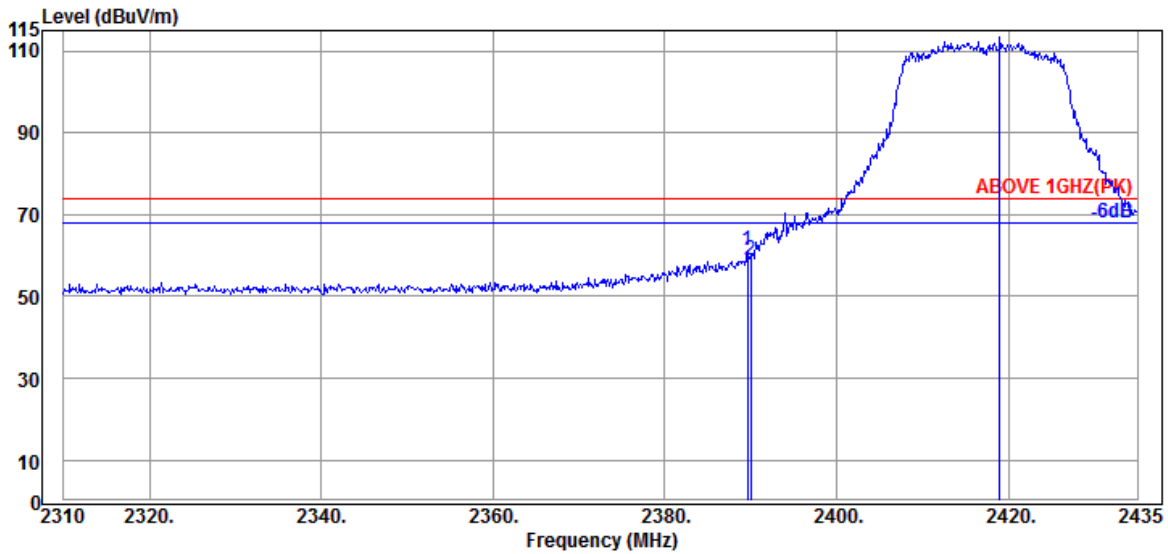

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	57.71	61.11	74.00	12.89	Peak
2390.000	31.89	6.04	34.54	55.42	58.81	74.00	15.19	Peak
@ 2419.000	32.01	6.07	34.54	110.00	113.54	---	---	Peak

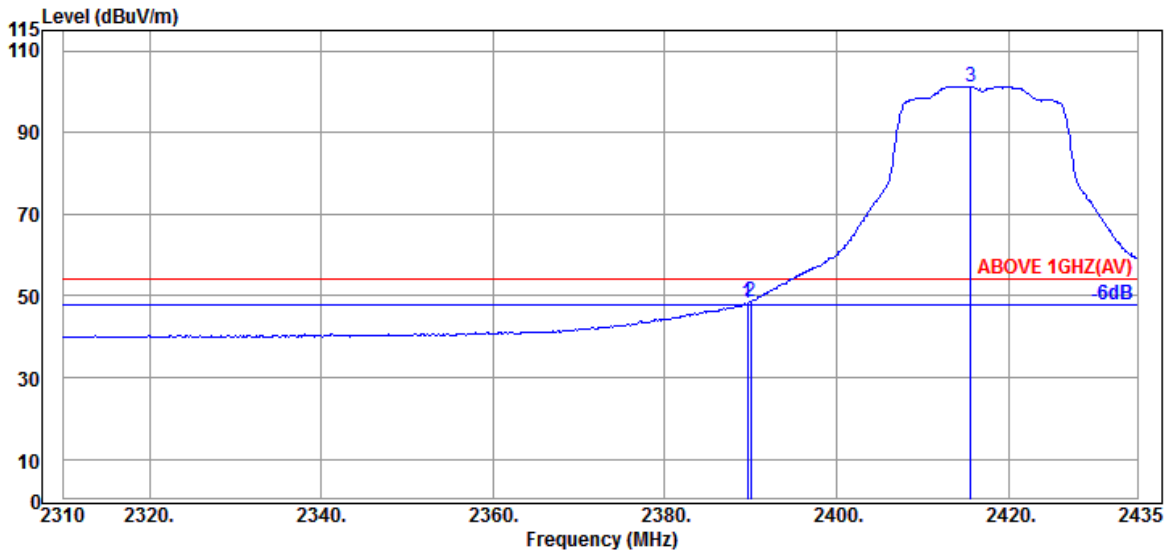


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	44.82	48.22	54.00	5.78	Average
2390.000	31.89	6.04	34.54	45.10	48.49	54.00	5.51	Average
@ 2415.625	31.94	6.07	34.54	97.84	101.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

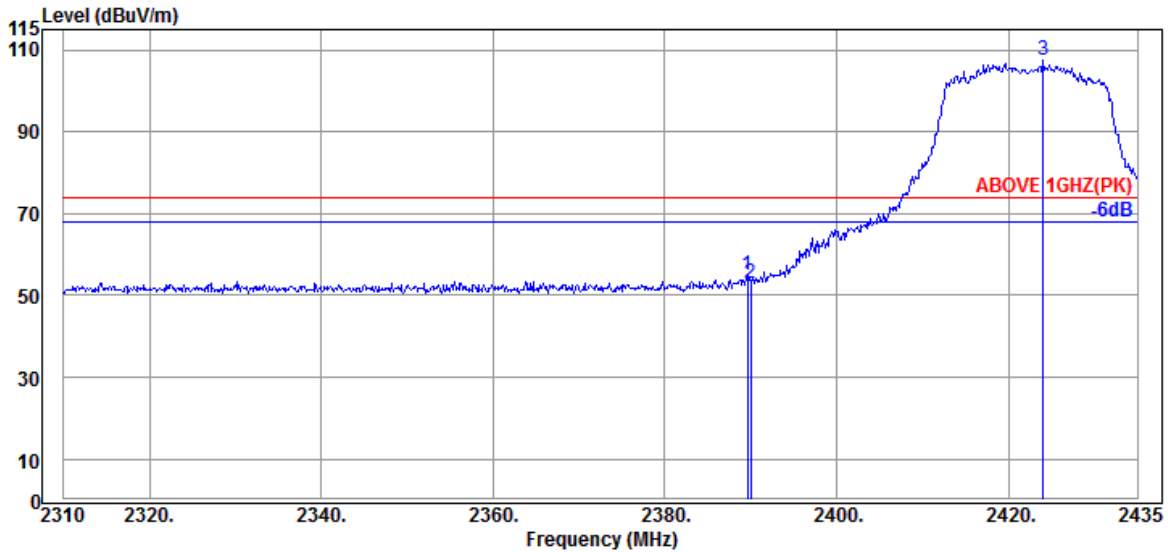

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	51.66	55.06	74.00	18.94	Peak
2390.000	31.89	6.04	34.54	49.71	53.10	74.00	20.90	Peak
@ 2424.000	32.01	6.10	34.54	103.78	107.35	---	---	Peak

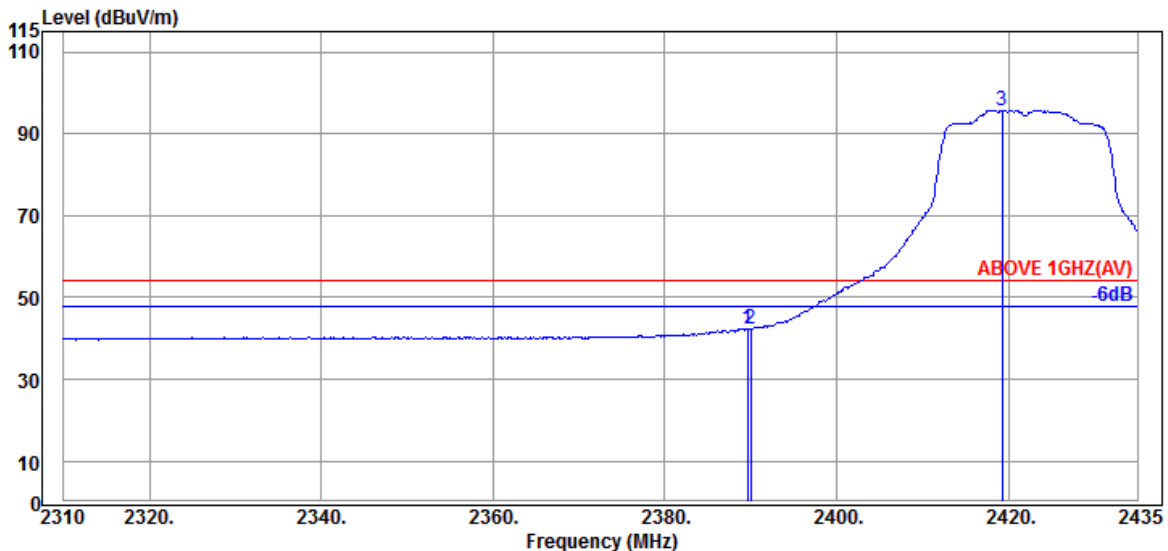


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	38.93	42.33	54.00	11.67	Average
2390.000	31.89	6.04	34.54	39.09	42.48	54.00	11.52	Average
@ 2419.250	32.01	6.07	34.54	92.28	95.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

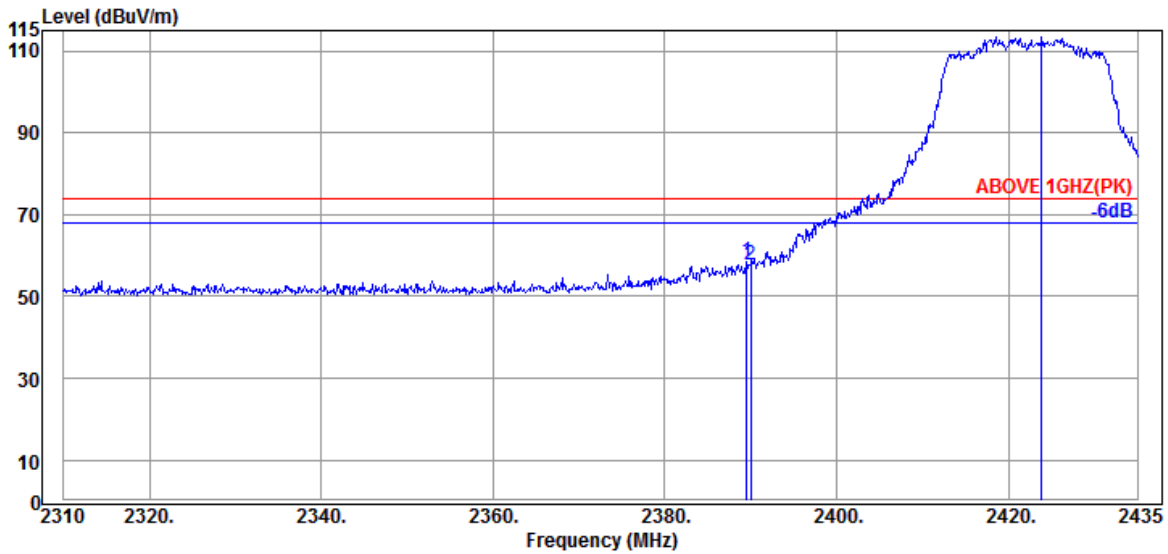

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	54.93	58.33	74.00	15.67	Peak
2390.000	31.89	6.04	34.54	54.21	57.60	74.00	16.40	Peak
@ 2423.875	32.01	6.10	34.54	109.87	113.44	---	---	Peak

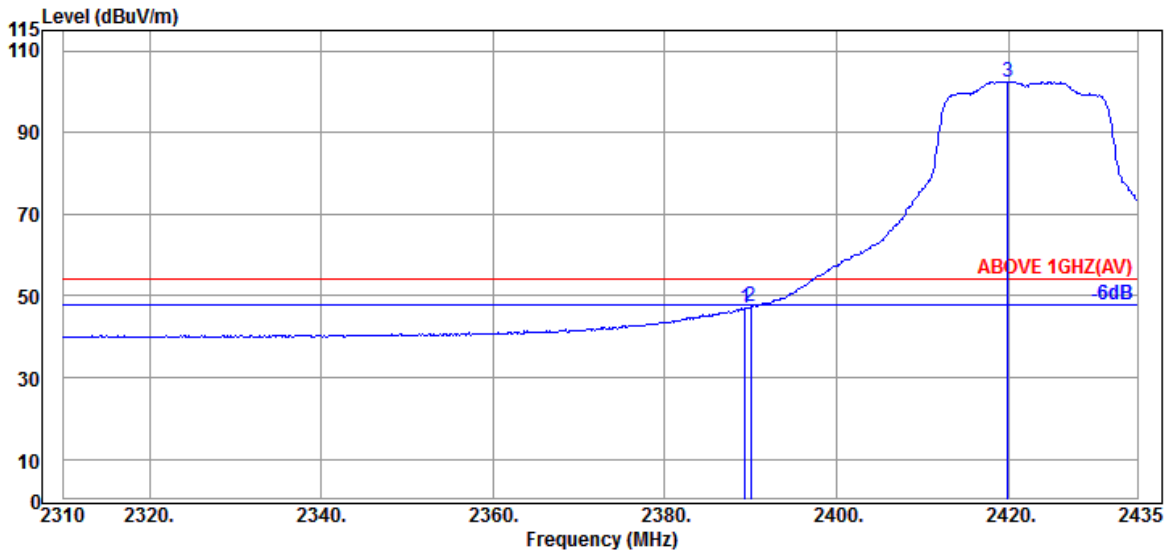


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	43.62	47.02	54.00	6.98	Average
2390.000	31.89	6.04	34.54	44.19	47.58	54.00	6.42	Average
@ 2419.875	32.01	6.10	34.54	98.91	102.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

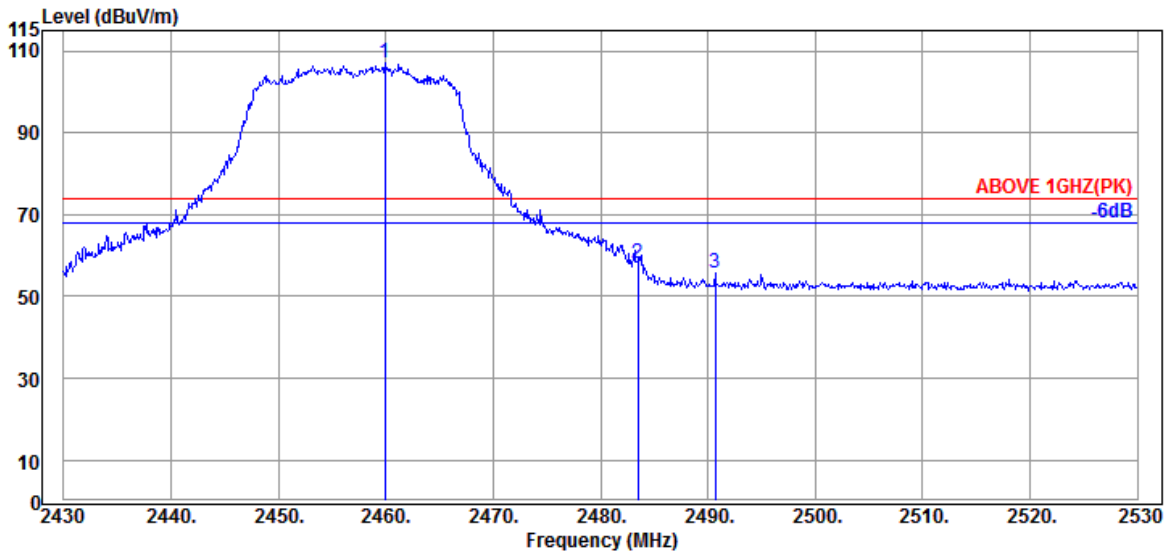

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	32.30	6.15	34.55	103.23	107.13	---	---	Peak
2483.500	32.30	6.18	34.55	54.15	58.08	74.00	15.92	Peak
2490.700	32.30	6.21	34.55	51.78	55.74	74.00	18.26	Peak

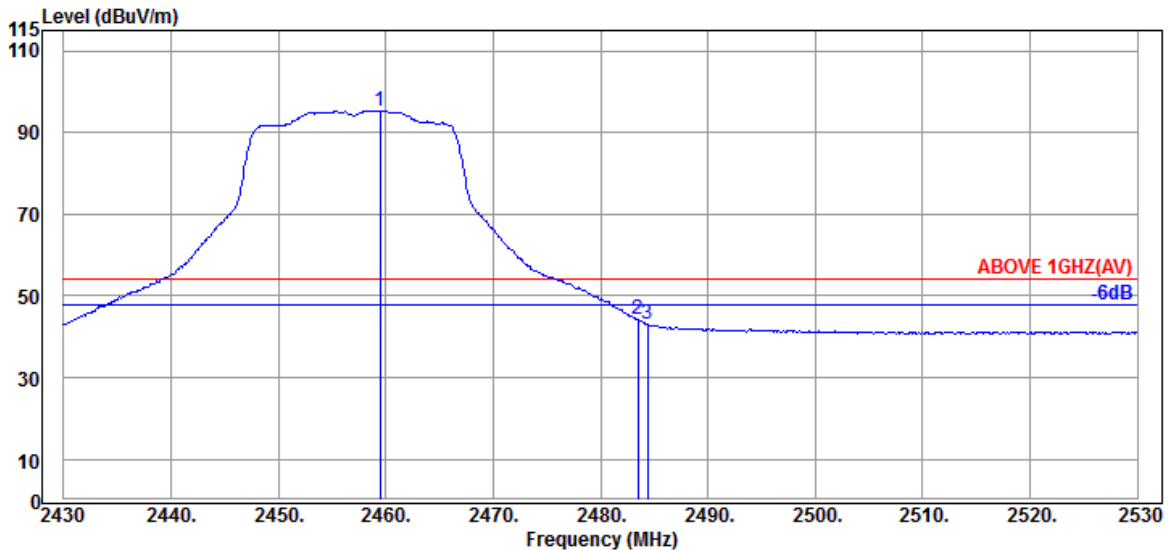


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	6.15	34.55	91.48	95.38	---	---	Average
2483.500	32.30	6.18	34.55	40.38	44.31	54.00	9.69	Average
2484.400	32.30	6.18	34.55	39.08	43.01	54.00	10.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

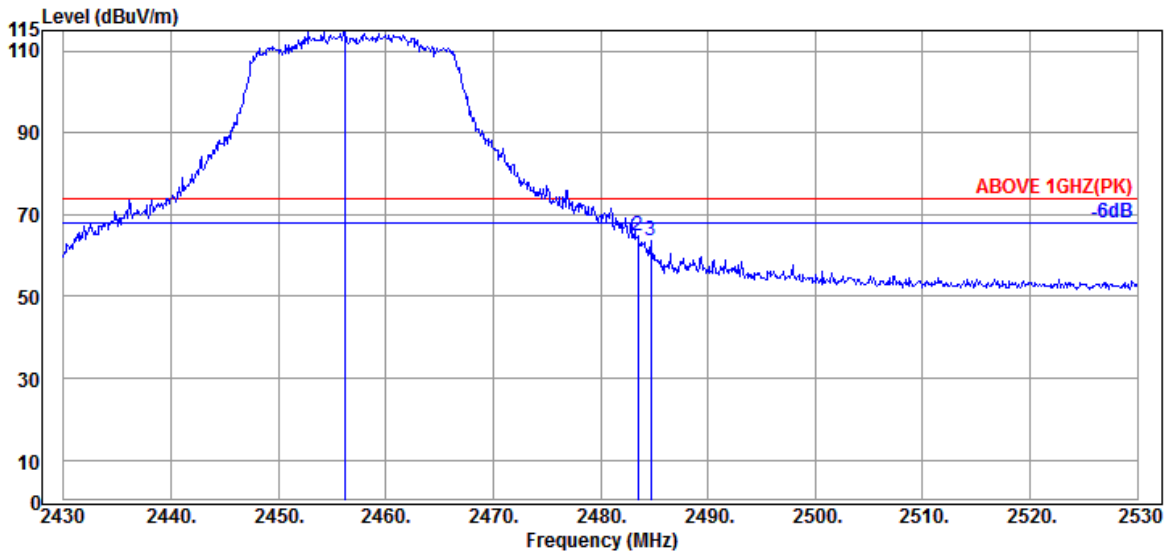

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.200	32.30	6.15	34.55	110.77	114.67	---	---	Peak
2483.500	32.30	6.18	34.55	60.89	64.82	74.00	9.18	Peak
2484.700	32.30	6.18	34.55	59.66	63.59	74.00	10.41	Peak

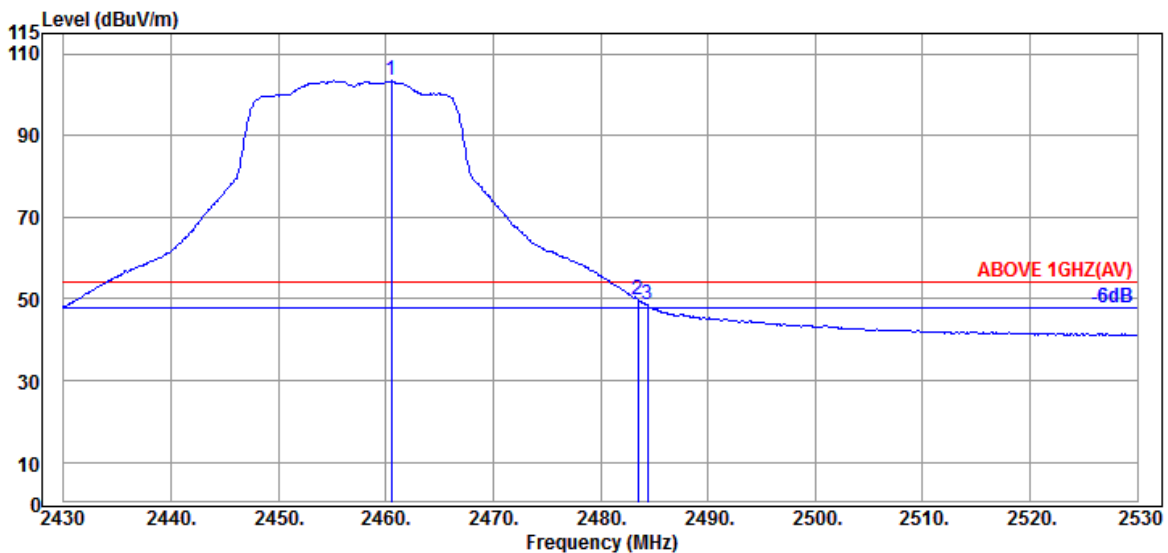


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	6.15	34.55	99.49	103.39	---	---	Average
2483.500	32.30	6.18	34.55	45.67	49.60	54.00	4.40	Average
2484.400	32.30	6.18	34.55	44.64	48.57	54.00	5.43	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

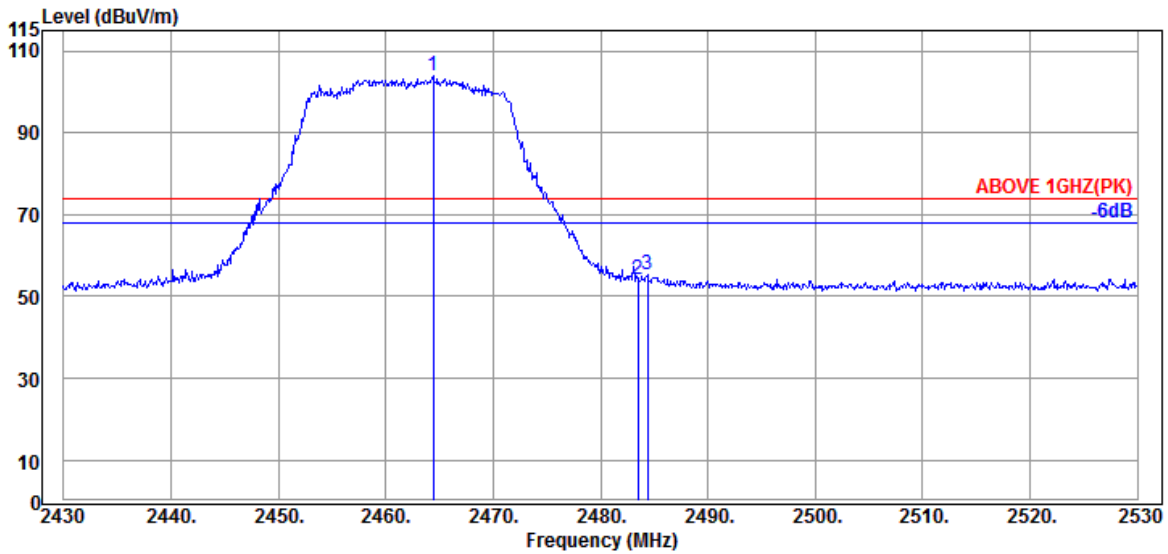

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	32.30	6.15	34.55	99.87	103.77	---	---	Peak
2483.500	32.30	6.18	34.55	50.12	54.05	74.00	19.95	Peak
2484.400	32.30	6.18	34.55	51.36	55.29	74.00	18.71	Peak

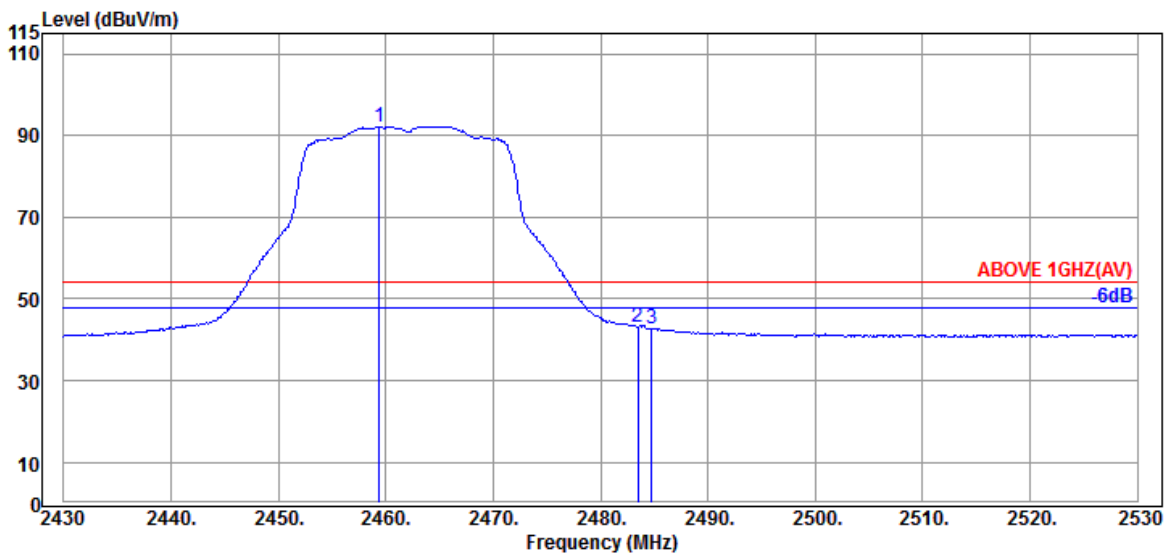


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	32.30	6.15	34.55	88.37	92.27	---	---	Average
2483.500	32.30	6.18	34.55	39.34	43.27	54.00	10.73	Average
2484.800	32.30	6.18	34.55	38.87	42.80	54.00	11.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

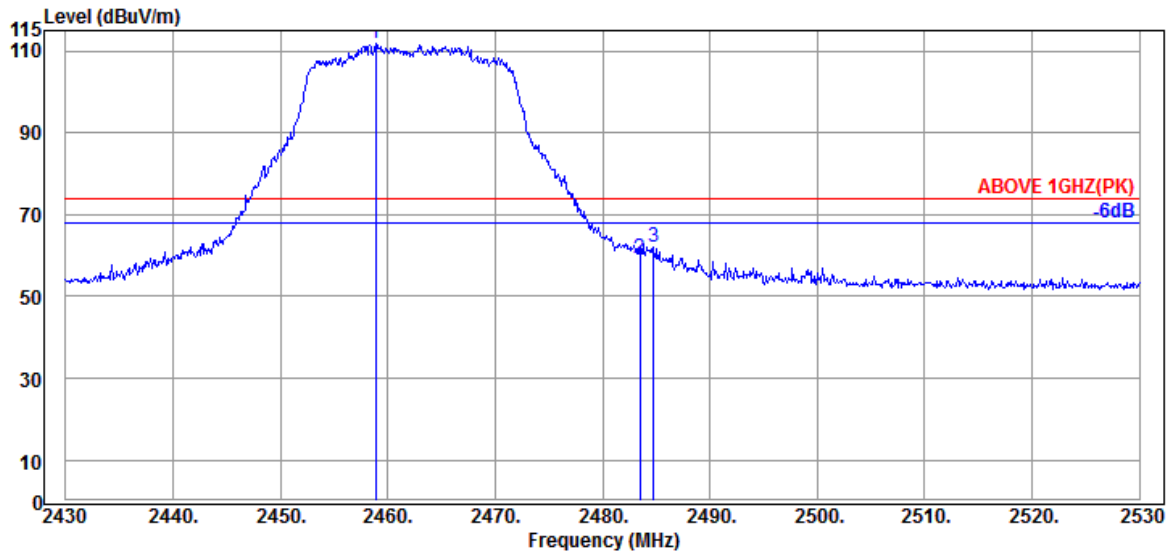

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	32.30	6.15	34.55	107.94	111.84	---	---	Peak
2483.500	32.30	6.18	34.55	55.27	59.20	74.00	14.80	Peak
2484.800	32.30	6.18	34.55	58.25	62.18	74.00	11.82	Peak

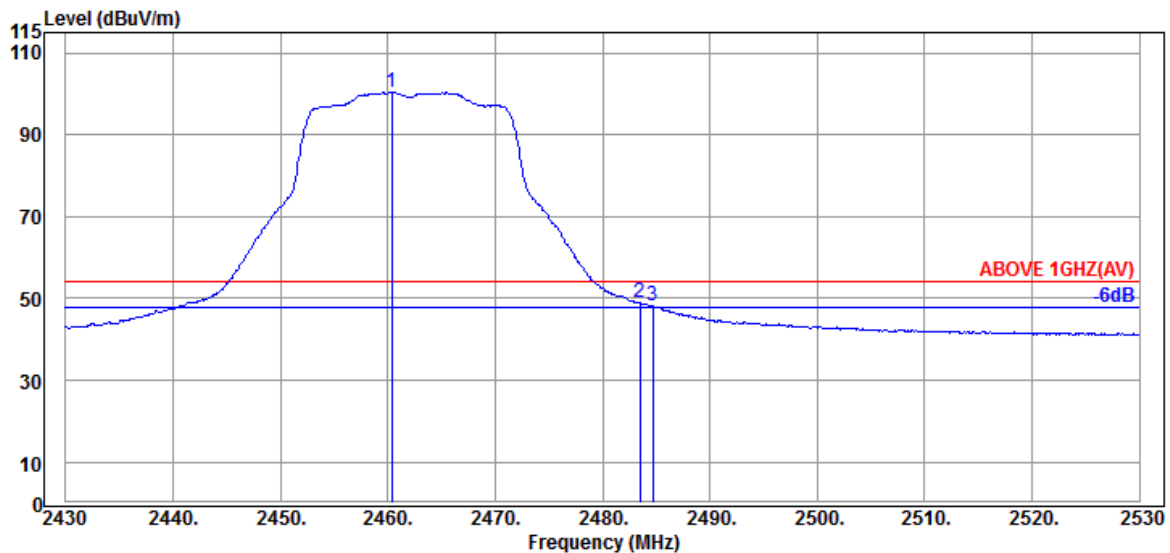


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.30	6.15	34.55	96.47	100.37	---	---	Average
2483.500	32.30	6.18	34.55	44.95	48.88	54.00	5.12	Average
2484.700	32.30	6.18	34.55	44.23	48.16	54.00	5.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

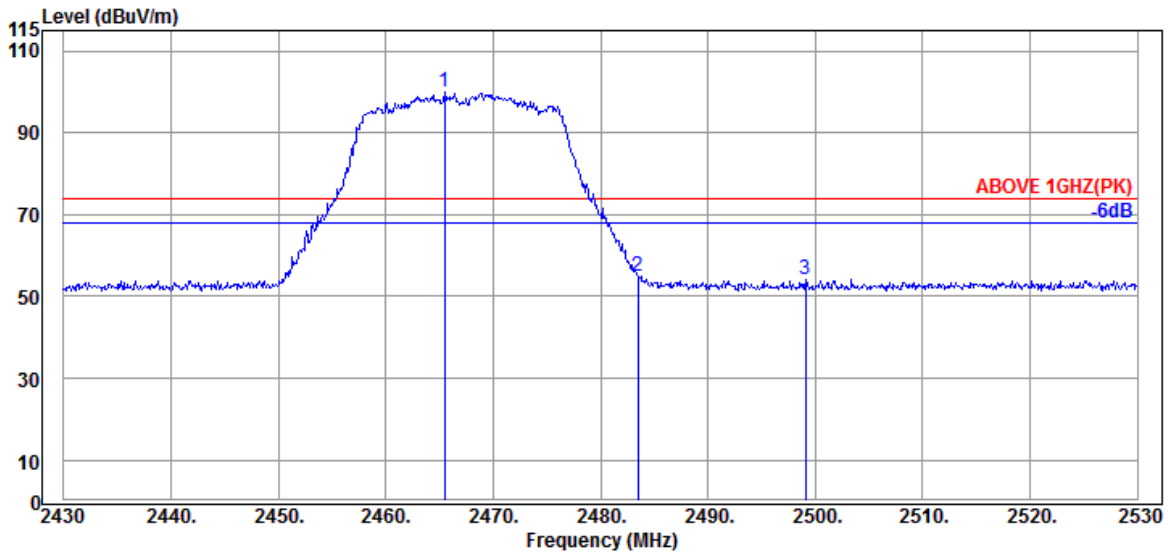

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	6.15	34.55	96.10	100.00	---	---	Peak
2483.500	32.30	6.18	34.55	50.88	54.81	74.00	19.19	Peak
2499.100	32.30	6.21	34.56	50.18	54.13	74.00	19.87	Peak

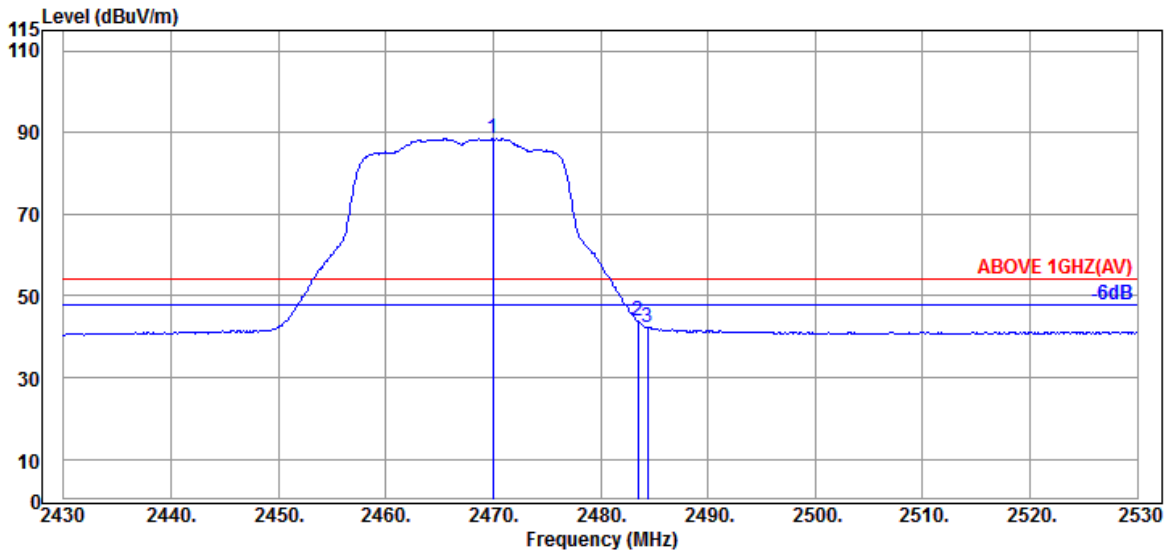


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	32.30	6.15	34.55	84.56	88.46	---	---	Average
2483.500	32.30	6.18	34.55	39.87	43.80	54.00	10.20	Average
2484.400	32.30	6.18	34.55	38.22	42.15	54.00	11.85	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

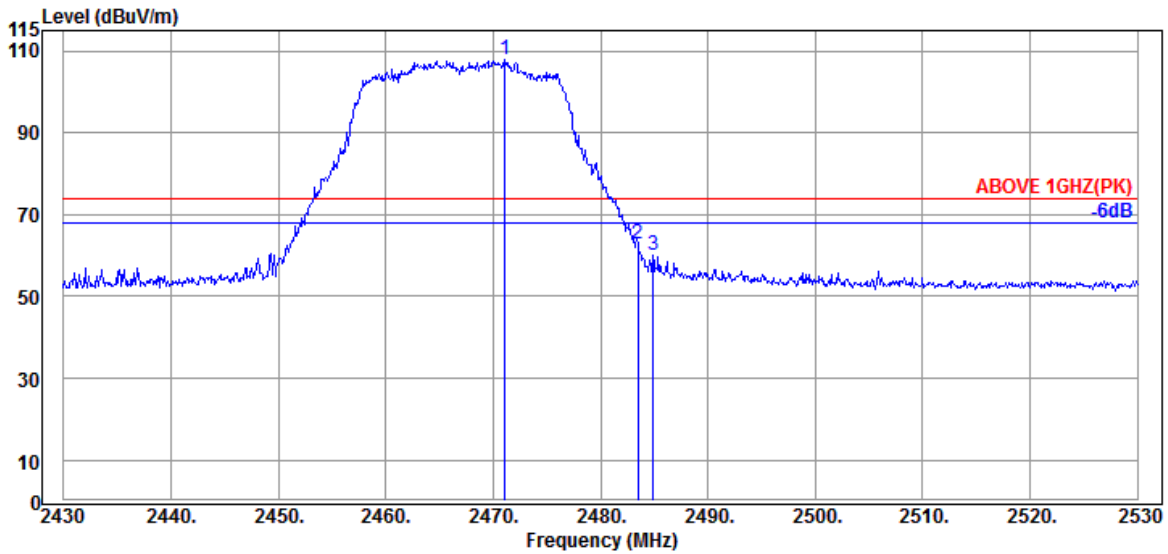

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.100	32.30	6.18	34.55	103.78	107.71	---	---	Peak
2483.500	32.30	6.18	34.55	58.73	62.66	74.00	11.34	Peak
2484.900	32.30	6.18	34.55	56.17	60.10	74.00	13.90	Peak

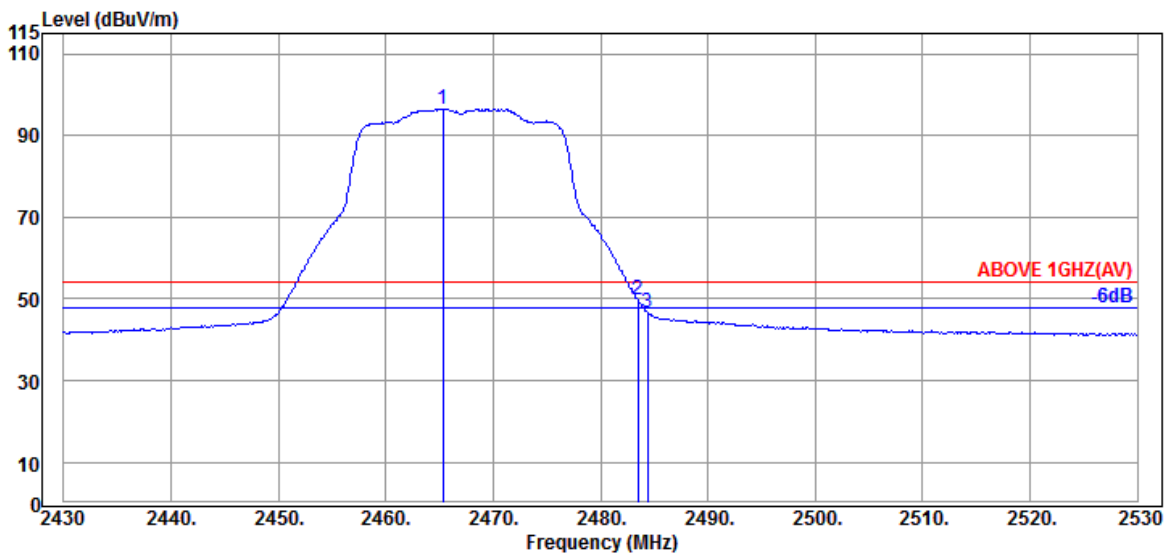


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	32.30	6.15	34.55	92.71	96.61	---	---	Average
2483.500	32.30	6.18	34.55	45.74	49.67	54.00	4.33	Average
2484.400	32.30	6.18	34.55	42.78	46.71	54.00	7.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

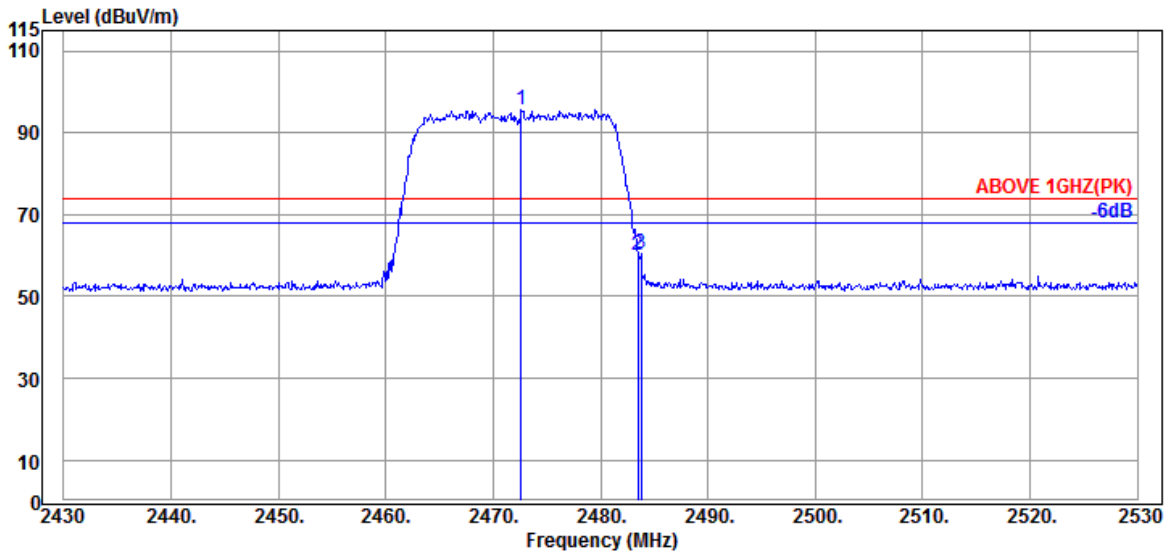

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.600	32.30	6.18	34.55	91.59	95.52	---	---	Peak
2483.500	32.30	6.18	34.55	55.96	59.89	74.00	14.11	Peak
2483.800	32.30	6.18	34.55	56.42	60.35	74.00	13.65	Peak

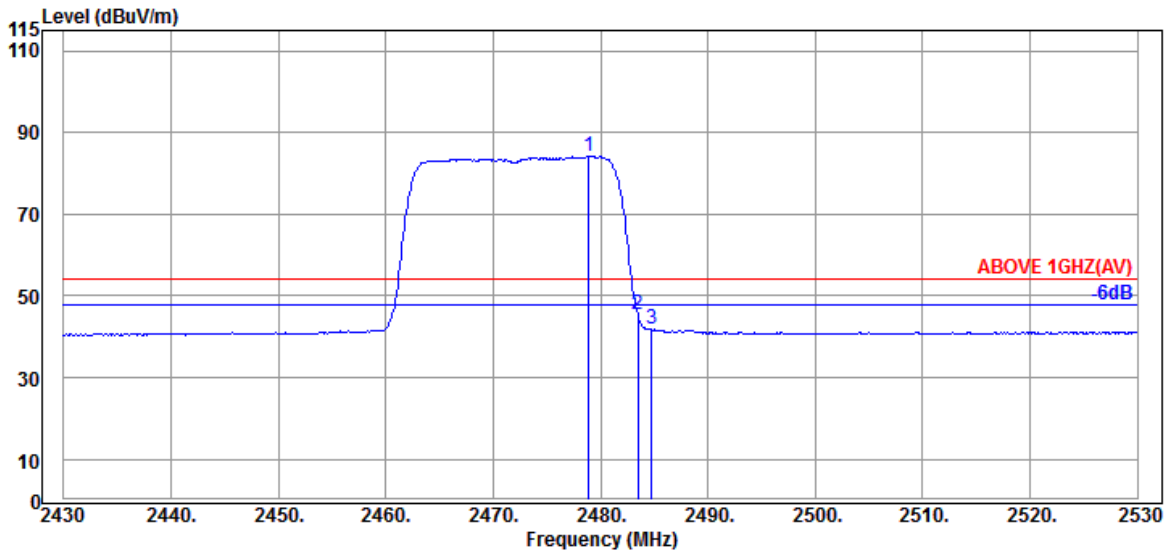


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.900	32.30	6.18	34.55	80.33	84.26	---	---	Average
2483.500	32.30	6.18	34.55	41.53	45.46	54.00	8.54	Average
2484.800	32.30	6.18	34.55	37.89	41.82	54.00	12.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

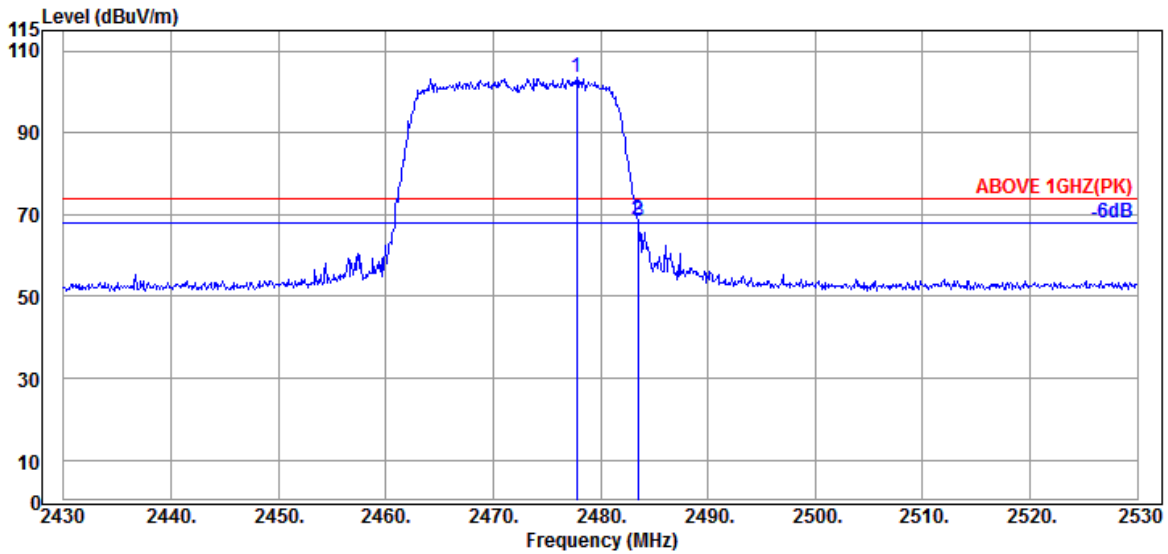

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.800	32.30	6.18	34.55	99.41	103.34	---	---	Peak
2483.500	32.30	6.18	34.55	64.84	68.77	74.00	5.23	Peak
2483.600	32.30	6.18	34.55	64.42	68.35	74.00	5.65	Peak

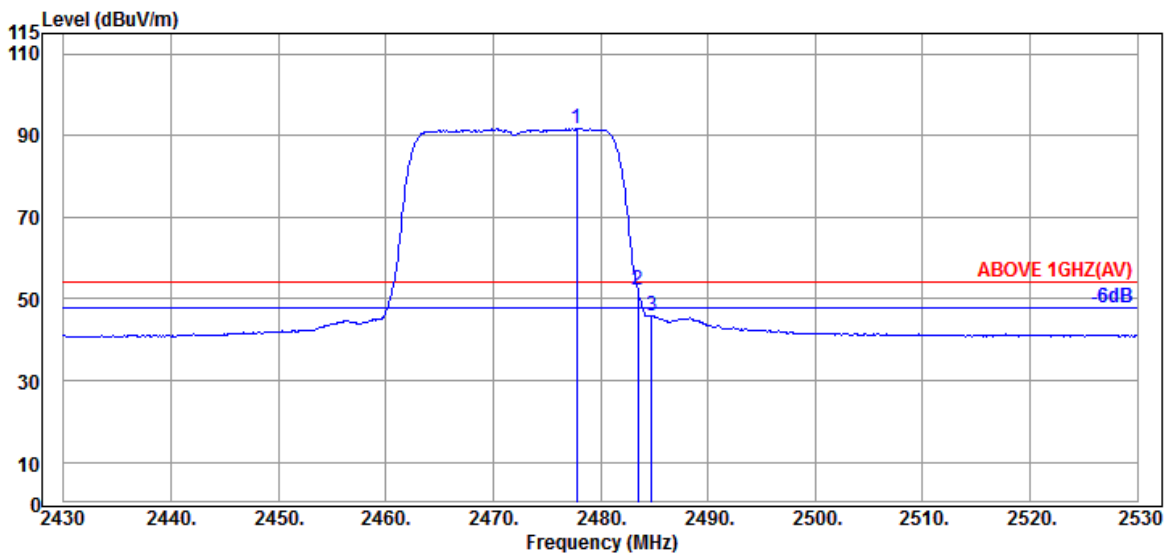


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.800	32.30	6.18	34.55	87.87	91.80	---	---	Average
2483.500	32.30	6.18	34.55	48.27	52.20	54.00	1.80	Average
2484.800	32.30	6.18	34.55	41.91	45.84	54.00	8.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

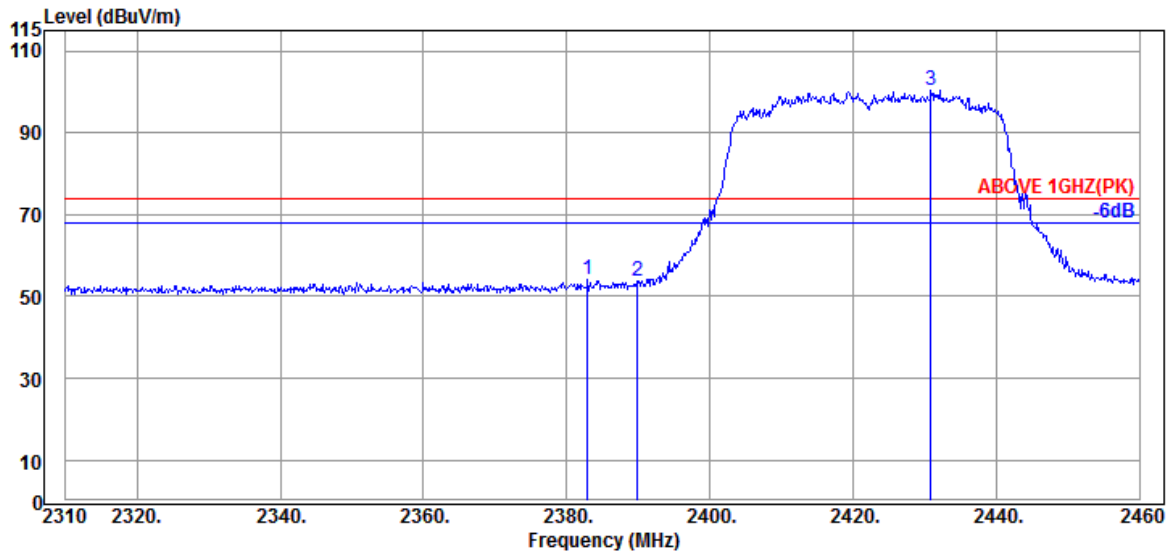

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.900	31.93	6.01	34.53	50.54	53.95	74.00	20.05	Peak
2389.950	31.89	6.04	34.54	50.41	53.80	74.00	20.20	Peak
@ 2430.900	32.09	6.10	34.54	96.92	100.57	---	---	Peak

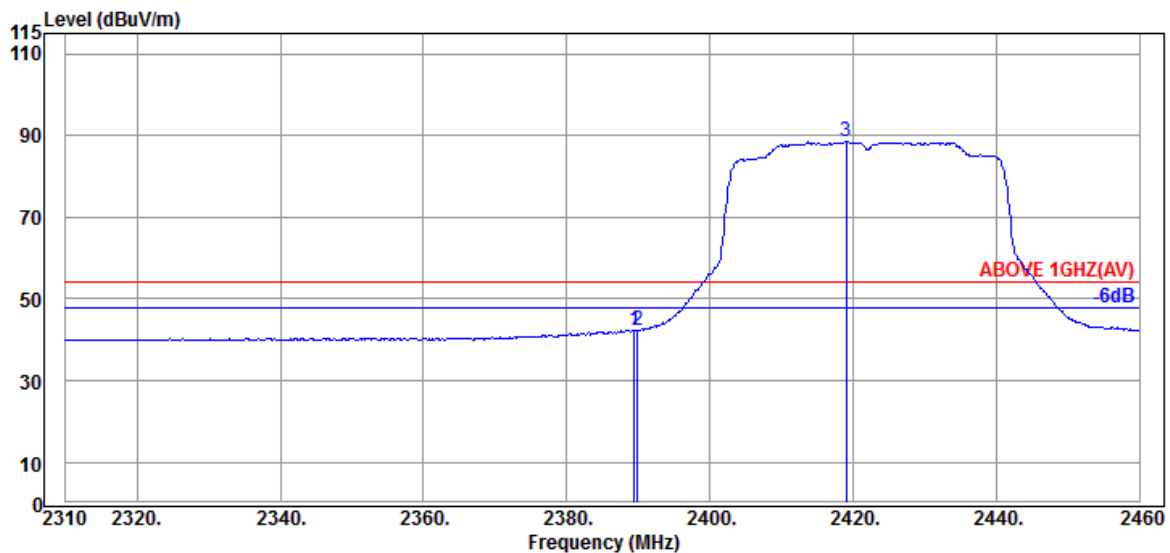


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	38.88	42.28	54.00	11.72	Average
2389.950	31.89	6.04	34.54	39.00	42.39	54.00	11.61	Average
@ 2419.050	32.01	6.07	34.54	84.90	88.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

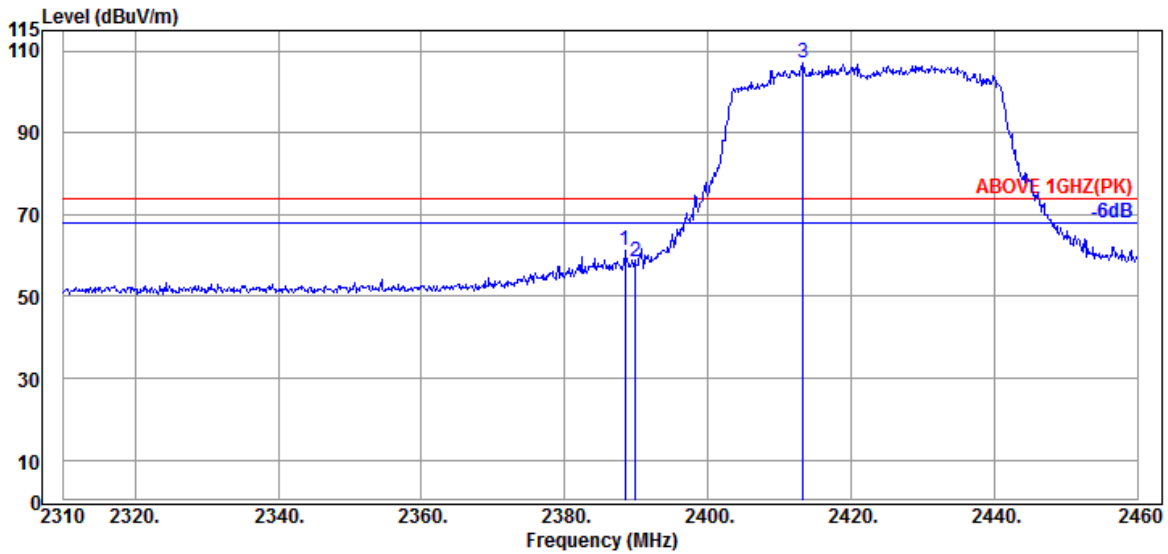

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	31.89	6.04	34.53	57.76	61.16	74.00	12.84	Peak
2389.950	31.89	6.04	34.54	55.28	58.67	74.00	15.33	Peak
@ 2413.350	31.94	6.07	34.54	103.45	106.92	---	---	Peak

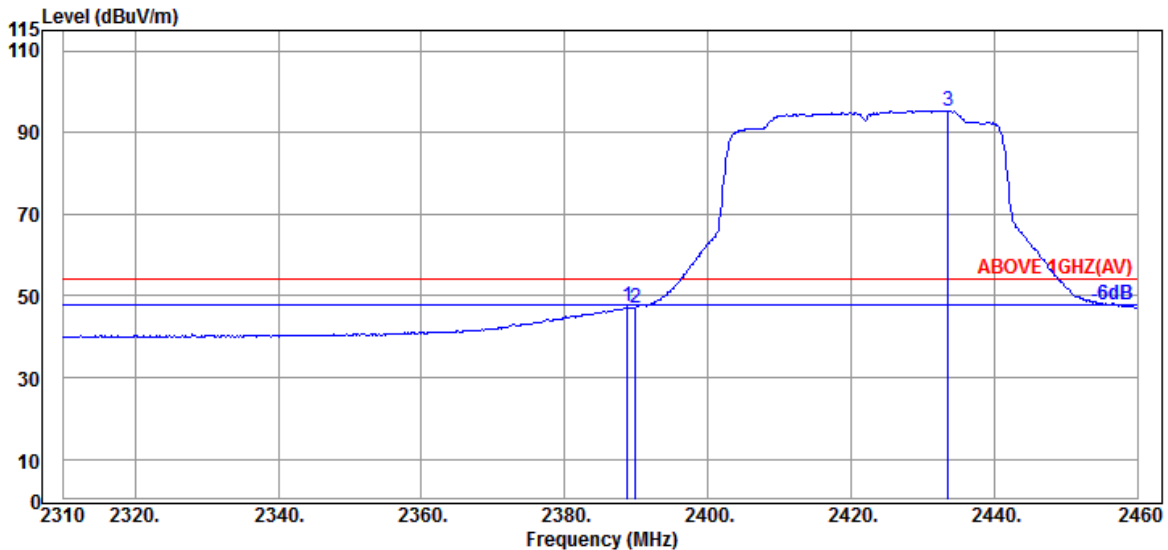


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.750	31.89	6.04	34.53	43.90	47.30	54.00	6.70	Average
2389.950	31.89	6.04	34.54	43.70	47.09	54.00	6.91	Average
@ 2433.600	32.16	6.10	34.54	91.68	95.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

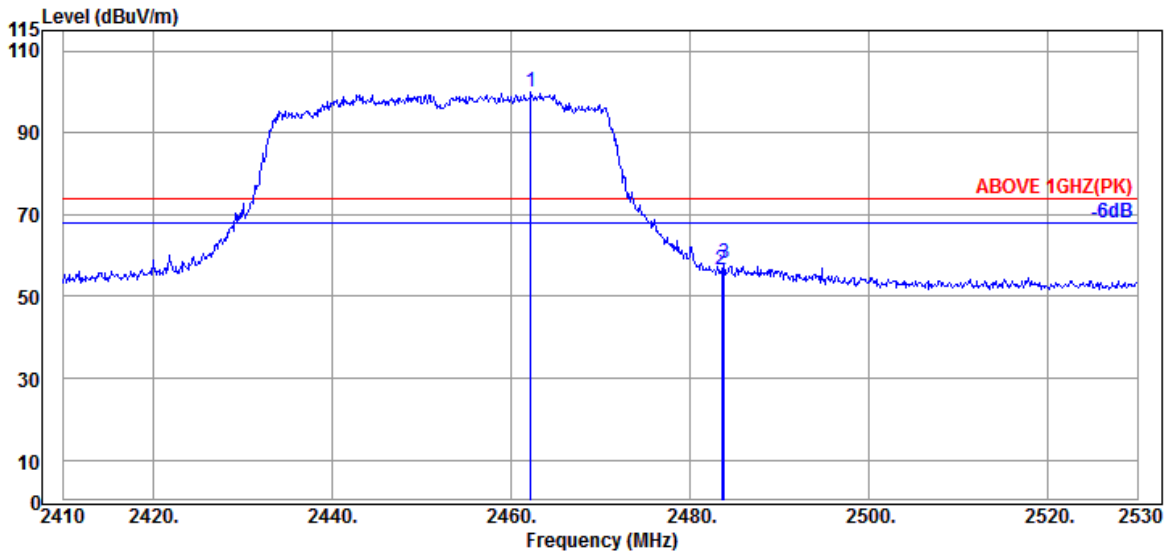

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.200	32.30	6.15	34.55	96.16	100.06	---	---	Peak
2483.560	32.30	6.18	34.55	52.61	56.54	74.00	17.46	Peak
2483.800	32.30	6.18	34.55	54.17	58.10	74.00	15.90	Peak

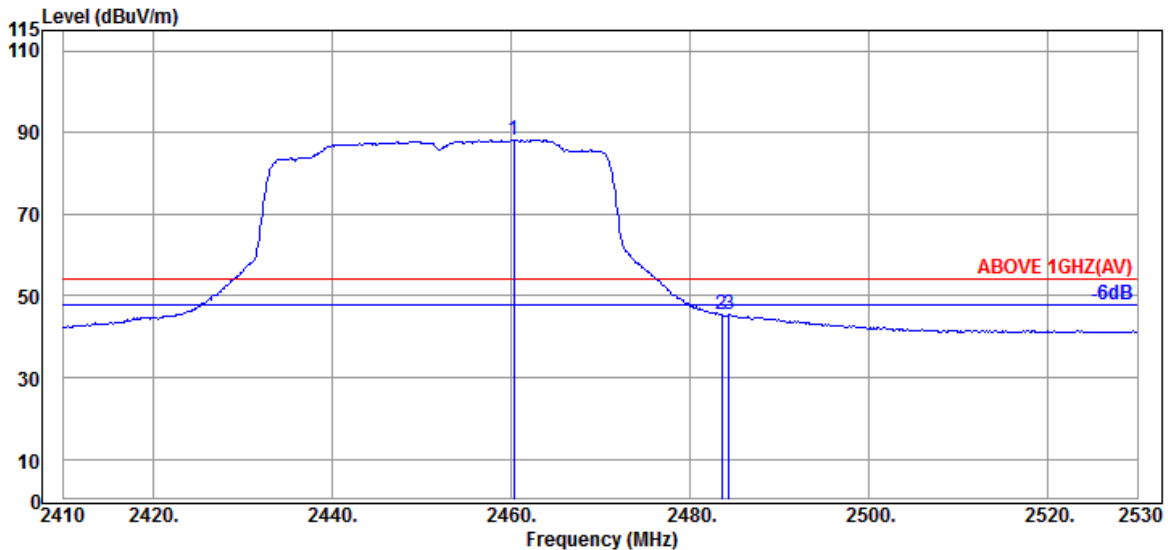


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.280	32.30	6.15	34.55	84.33	88.23	---	---	Average
2483.560	32.30	6.18	34.55	41.34	45.27	54.00	8.73	Average
2484.400	32.30	6.18	34.55	41.42	45.35	54.00	8.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

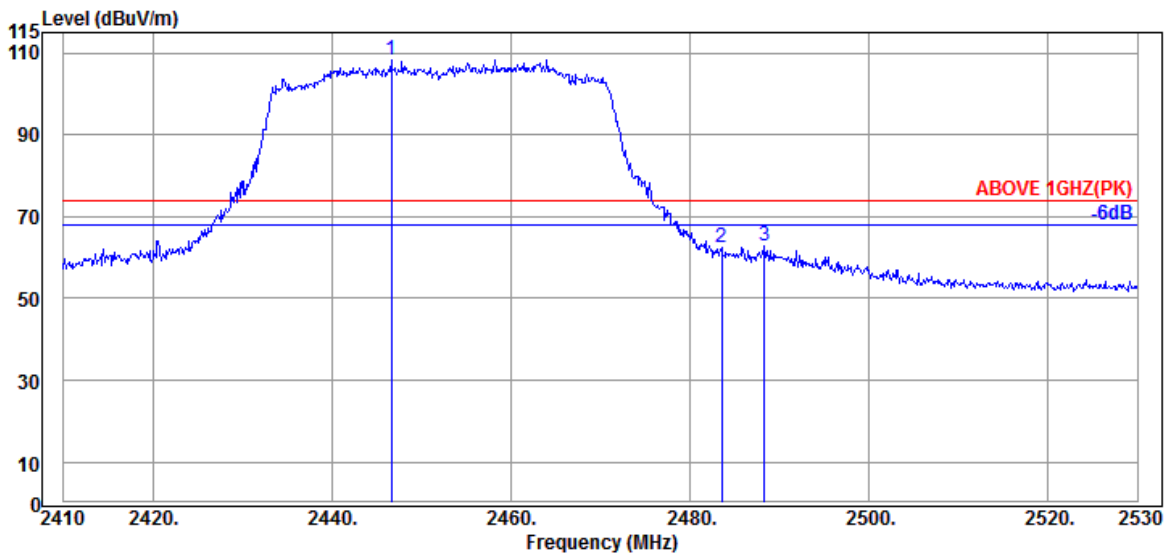

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.600	32.30	6.13	34.55	104.58	108.46	---	---	Peak
2483.560	32.30	6.18	34.55	58.39	62.32	74.00	11.68	Peak
2488.360	32.30	6.21	34.55	58.78	62.74	74.00	11.26	Peak

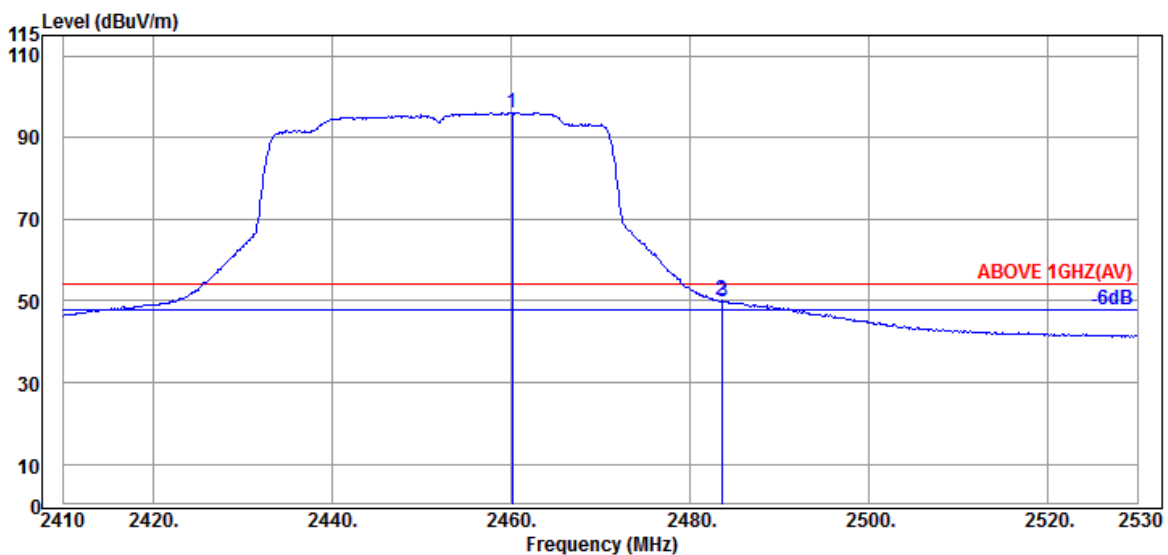


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.160	32.30	6.15	34.55	92.29	96.19	---	---	Average
2483.560	32.30	6.18	34.55	46.28	50.21	54.00	3.79	Average
2483.680	32.30	6.18	34.55	46.04	49.97	54.00	4.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

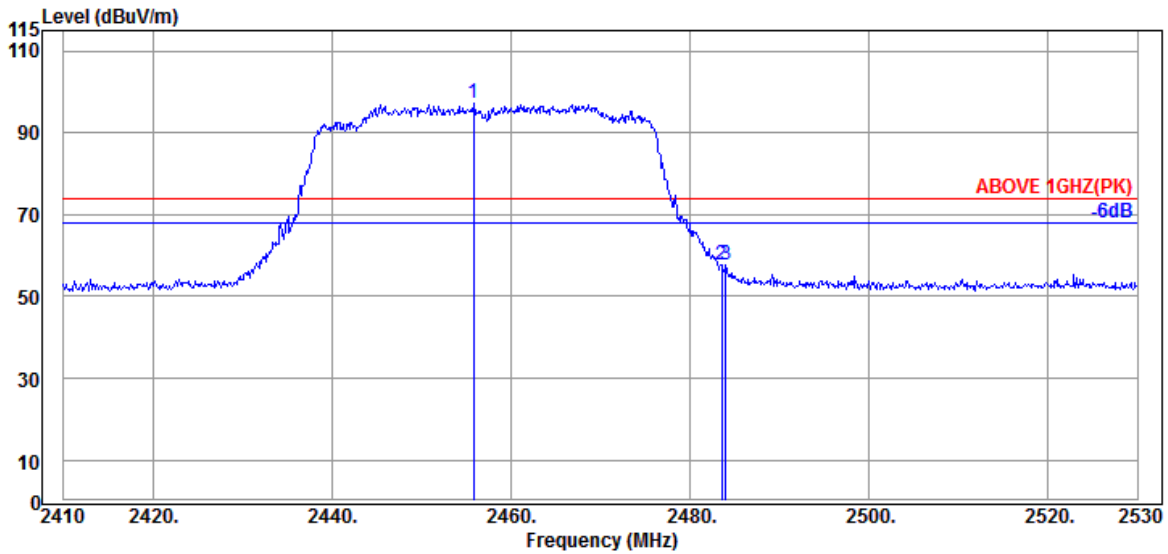

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.840	32.30	6.15	34.55	93.45	97.35	---	---	Peak
2483.560	32.30	6.18	34.55	53.58	57.51	74.00	16.49	Peak
2484.040	32.30	6.18	34.55	53.93	57.86	74.00	16.14	Peak

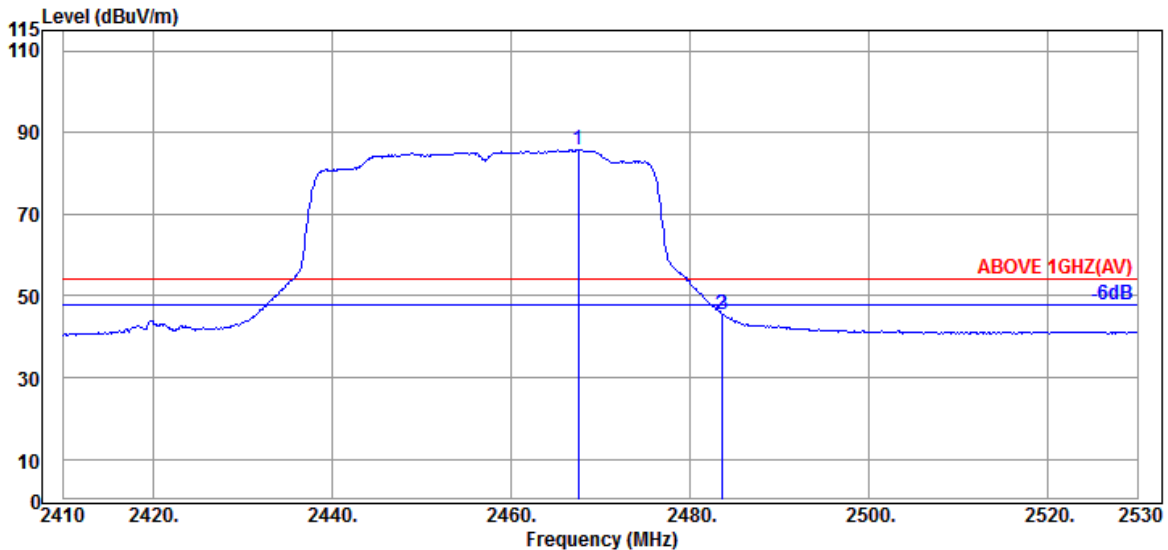


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.480	32.30	6.15	34.55	81.77	85.67	---	---	Average
2483.560	32.30	6.18	34.55	41.65	45.58	54.00	8.42	Average
2483.680	32.30	6.18	34.55	41.64	45.57	54.00	8.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

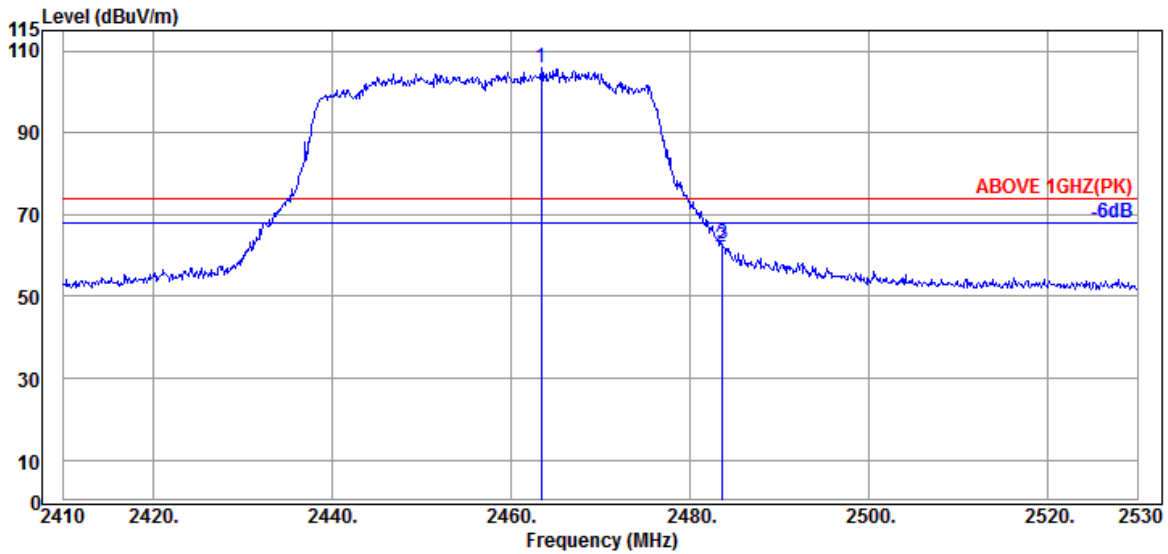

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	32.30	6.15	34.55	101.83	105.73	---	---	Peak
2483.560	32.30	6.18	34.55	57.93	61.86	74.00	12.14	Peak
2483.680	32.30	6.18	34.55	58.74	62.67	74.00	11.33	Peak

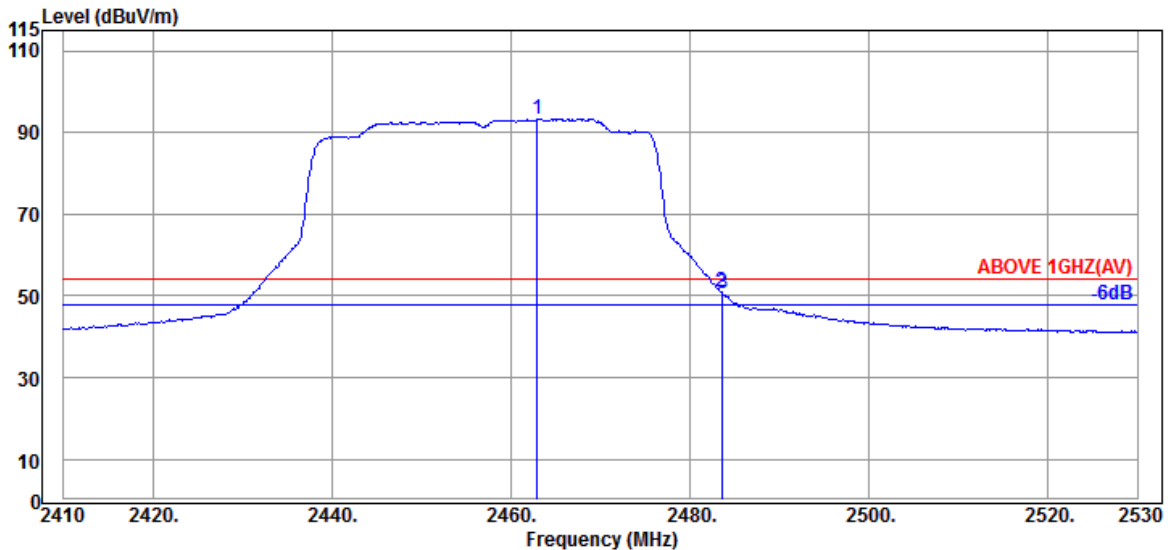


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.920	32.30	6.15	34.55	89.46	93.36	---	---	Average
2483.560	32.30	6.18	34.55	46.92	50.85	54.00	3.15	Average
2483.680	32.30	6.18	34.55	46.46	50.39	54.00	3.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

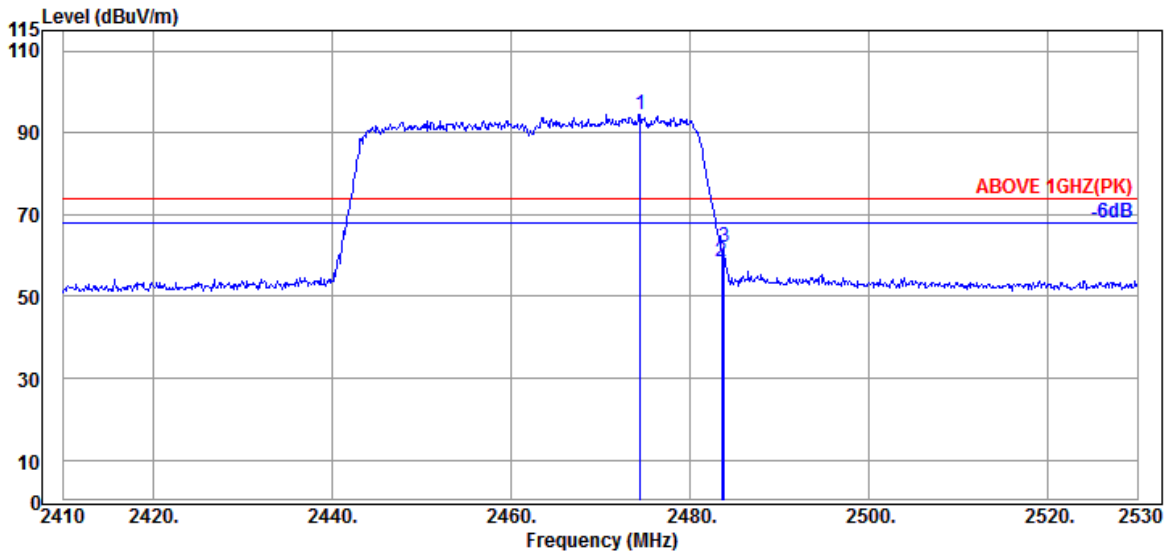

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.440	32.30	6.18	34.55	90.68	94.61	---	---	Peak
2483.560	32.30	6.18	34.55	54.51	58.44	74.00	15.56	Peak
2483.800	32.30	6.18	34.55	58.03	61.96	74.00	12.04	Peak

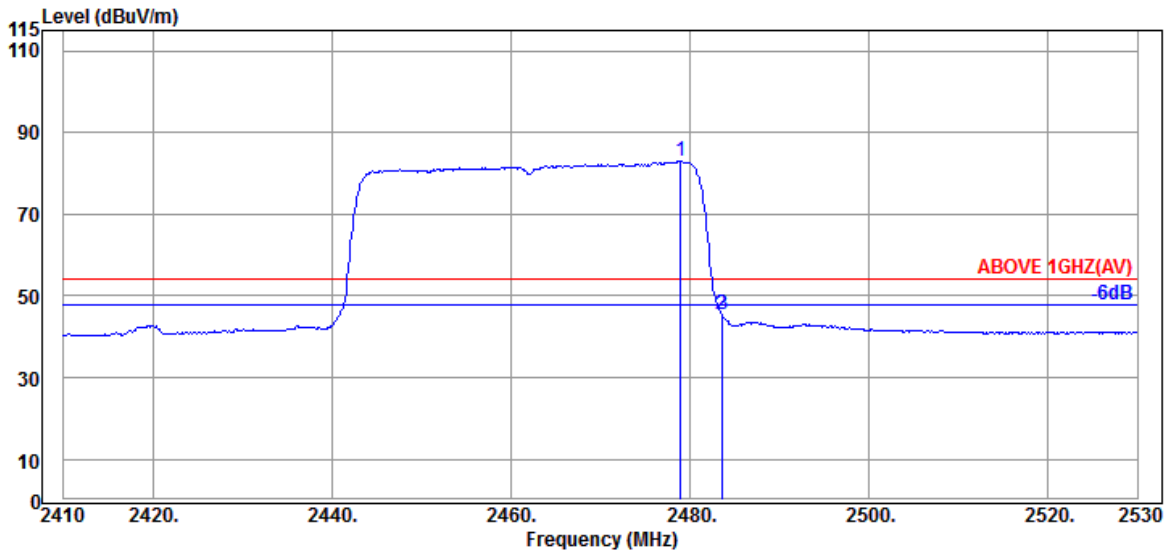


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	6.18	34.55	79.12	83.05	---	---	Average
2483.560	32.30	6.18	34.55	41.65	45.58	54.00	8.42	Average
2483.680	32.30	6.18	34.55	41.39	45.32	54.00	8.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

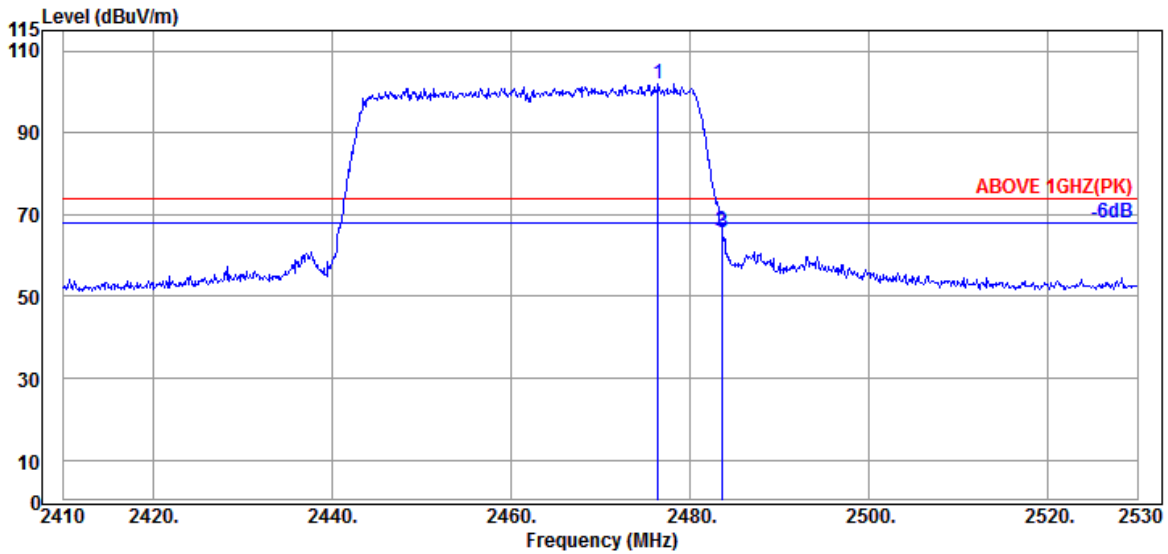

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.480	32.30	6.18	34.55	98.15	102.08	---	---	Peak
2483.560	32.30	6.18	34.55	62.09	66.02	74.00	7.98	Peak
2483.680	32.30	6.18	34.55	61.81	65.74	74.00	8.26	Peak

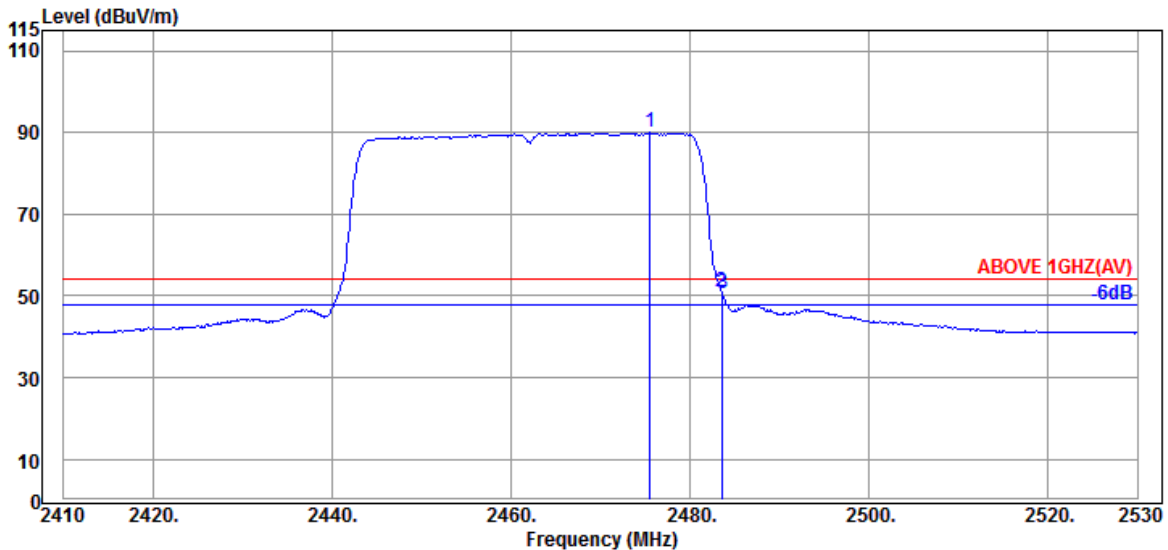


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.520	32.30	6.18	34.55	85.99	89.92	---	---	Average
2483.560	32.30	6.18	34.55	47.21	51.14	54.00	2.86	Average
2483.680	32.30	6.18	34.55	46.48	50.41	54.00	3.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

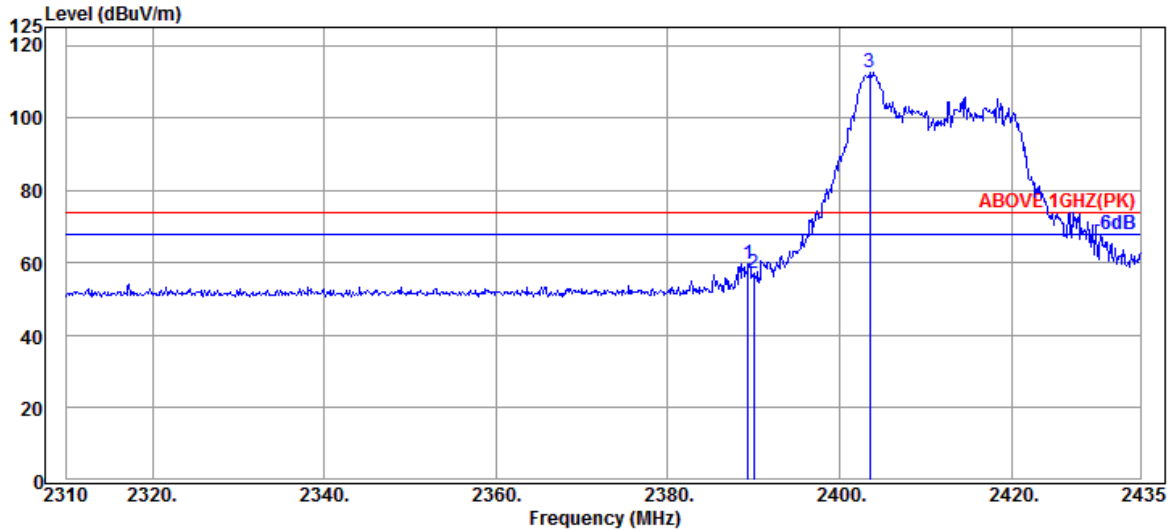

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	56.36	59.76	74.00	14.24	Peak
2390.000	31.89	6.04	34.54	53.74	57.13	74.00	16.87	Peak
@ 2403.500	31.80	6.07	34.54	109.05	112.38	---	---	Peak

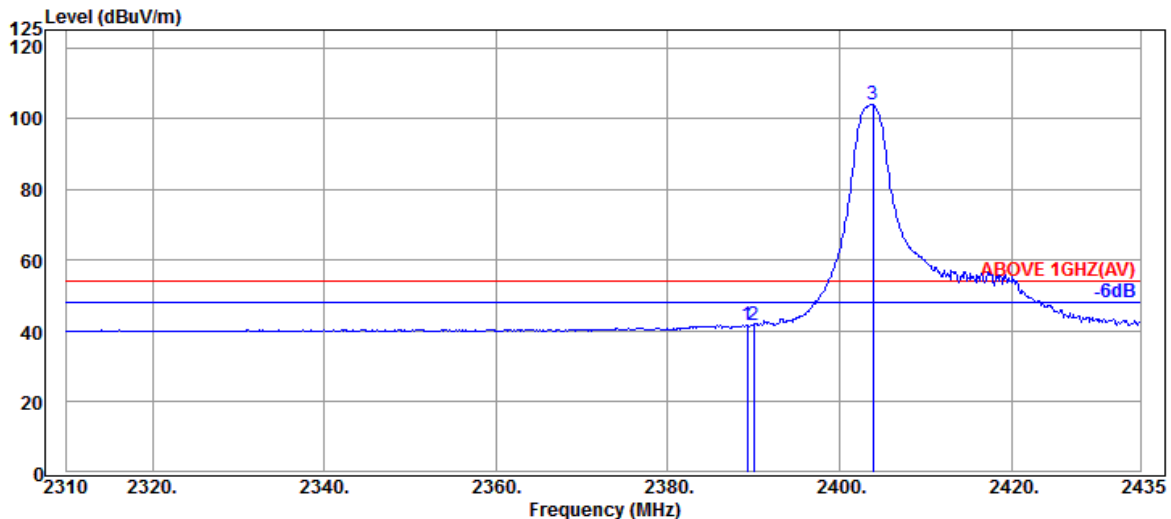


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	31.89	6.04	34.53	38.34	41.74	54.00	12.26	Average
2390.000	31.89	6.04	34.54	38.09	41.48	54.00	12.52	Average
@ 2403.875	31.80	6.07	34.54	100.66	103.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

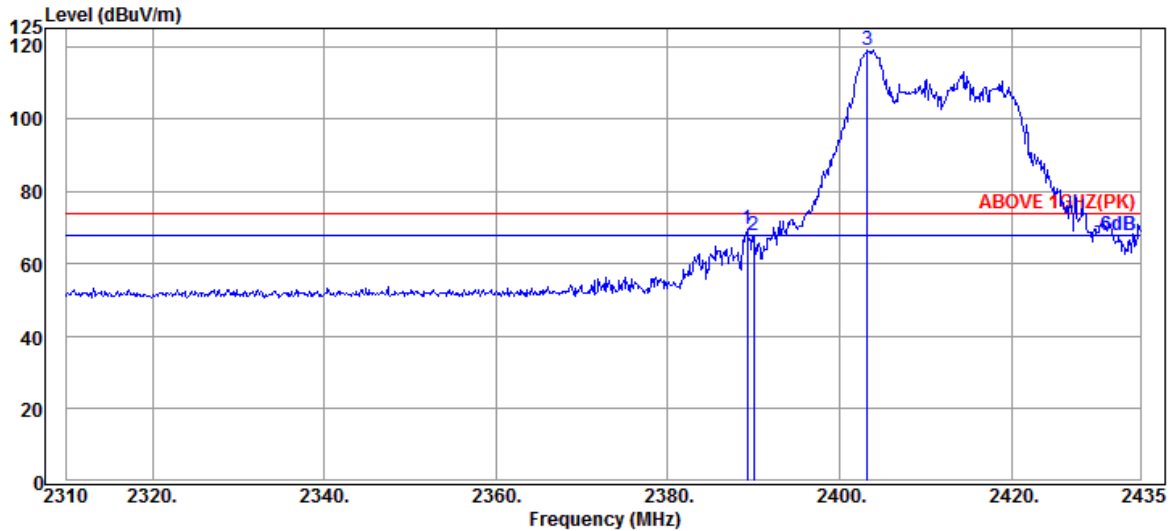

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	31.89	6.04	34.53	66.07	69.47	74.00	4.53	Peak
2390.000	31.89	6.04	34.54	64.41	67.80	74.00	6.20	Peak
@ 2403.250	31.80	6.07	34.54	115.67	119.00	---	---	Peak

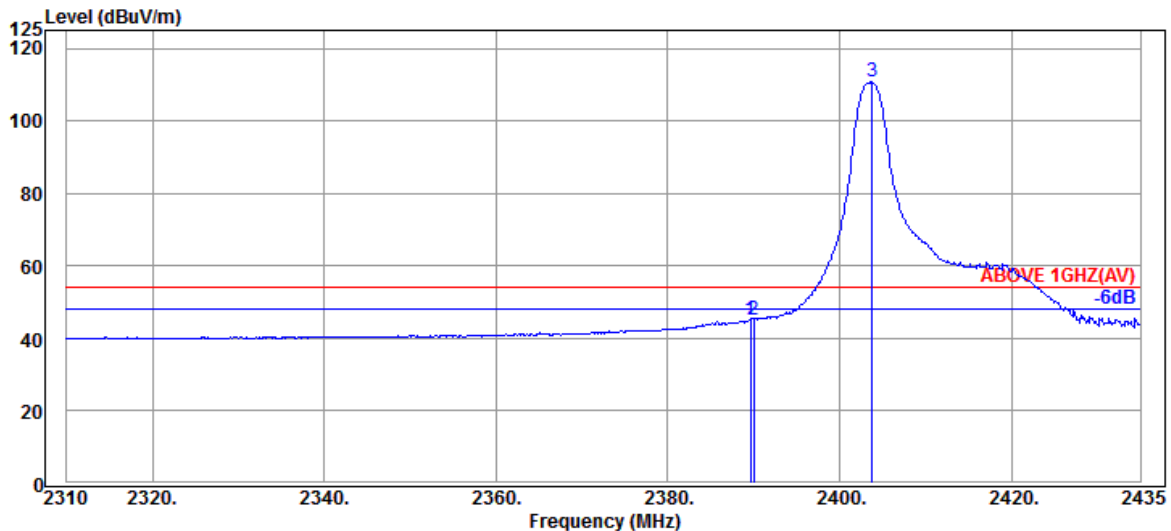


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	41.77	45.17	54.00	8.83	Average
2390.000	31.89	6.04	34.54	41.89	45.28	54.00	8.72	Average
@ 2403.750	31.80	6.07	34.54	107.34	110.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

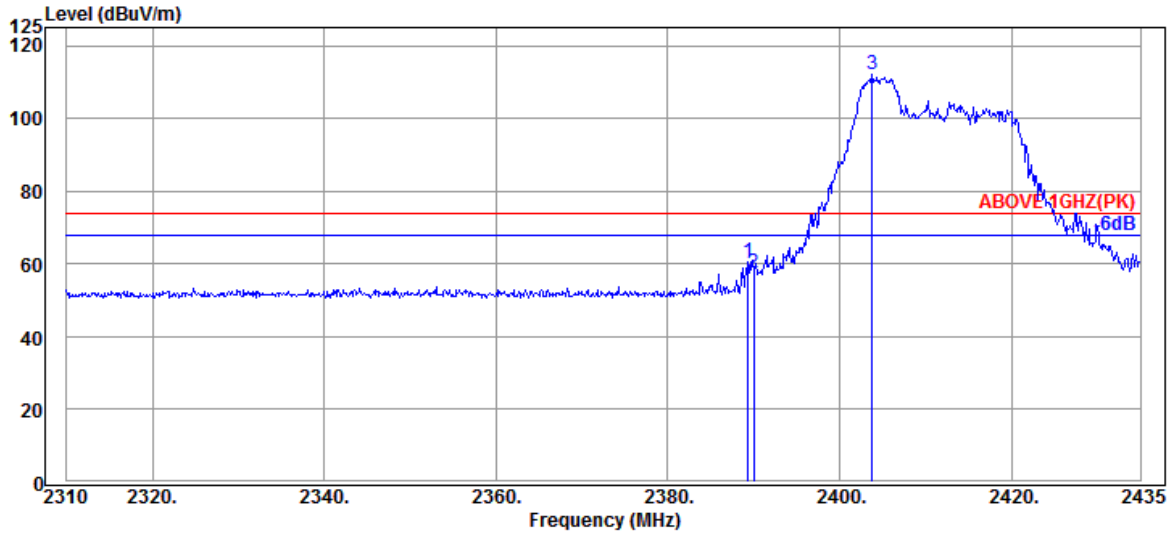

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	57.24	60.64	74.00	13.36	Peak
2390.000	31.89	6.04	34.54	54.03	57.42	74.00	16.58	Peak
@ 2403.750	31.80	6.07	34.54	108.75	112.08	---	---	Peak

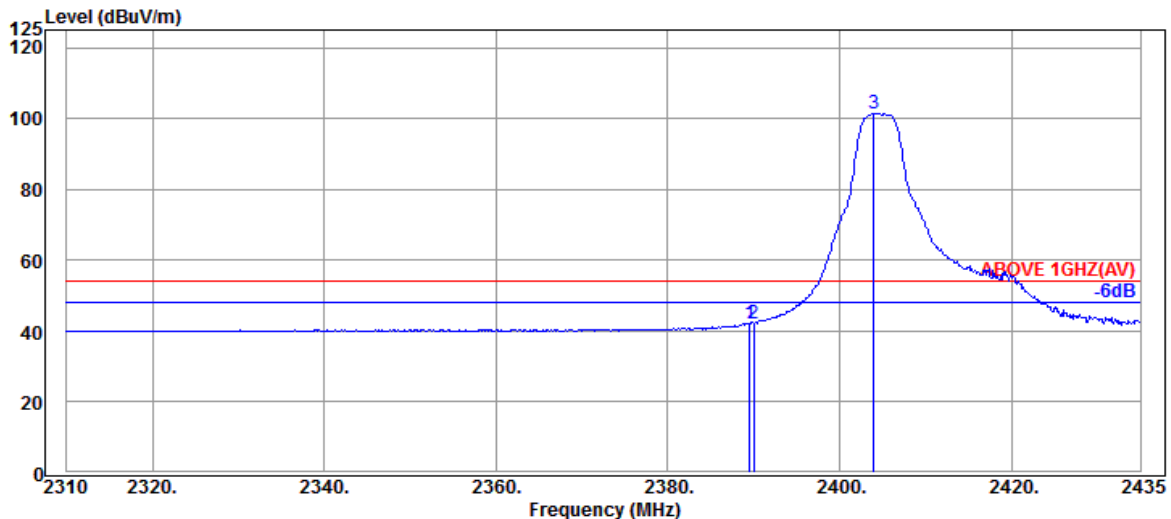


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	38.82	42.22	54.00	11.78	Average
2390.000	31.89	6.04	34.54	38.88	42.27	54.00	11.73	Average
@ 2404.000	31.80	6.07	34.54	98.18	101.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

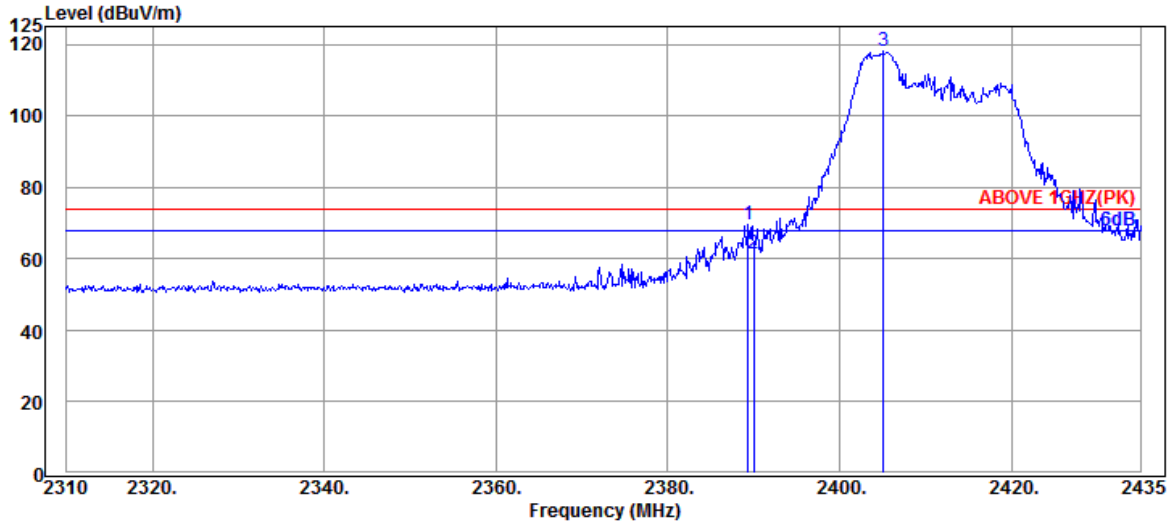

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	66.17	69.57	74.00	4.43	Peak
2390.000	31.89	6.04	34.54	58.10	61.49	74.00	12.51	Peak
@ 2405.125	31.87	6.07	34.54	114.79	118.19	---	---	Peak

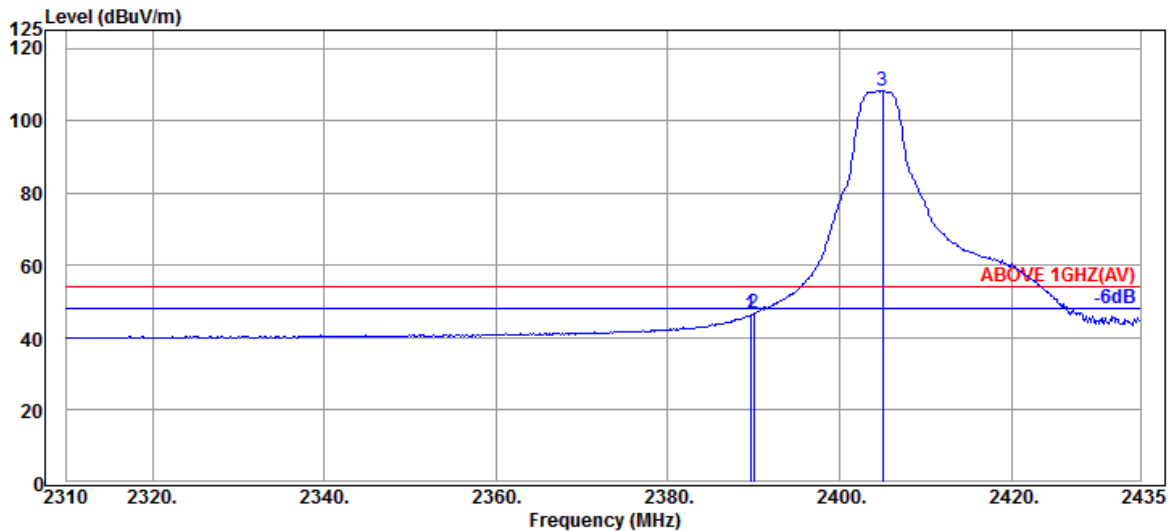


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	42.90	46.30	54.00	7.70	Average
2390.000	31.89	6.04	34.54	43.29	46.68	54.00	7.32	Average
@ 2405.000	31.87	6.07	34.54	104.88	108.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

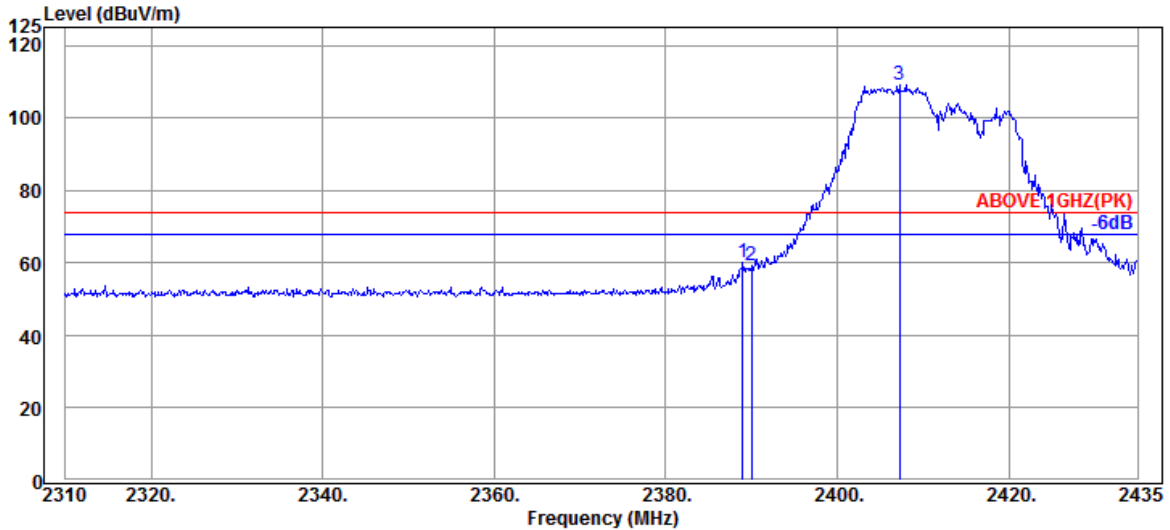

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	31.89	6.04	34.53	56.83	60.23	74.00	13.77	Peak
2390.000	31.89	6.04	34.54	55.90	59.29	74.00	14.71	Peak
@ 2407.250	31.87	6.07	34.54	105.88	109.28	---	---	Peak

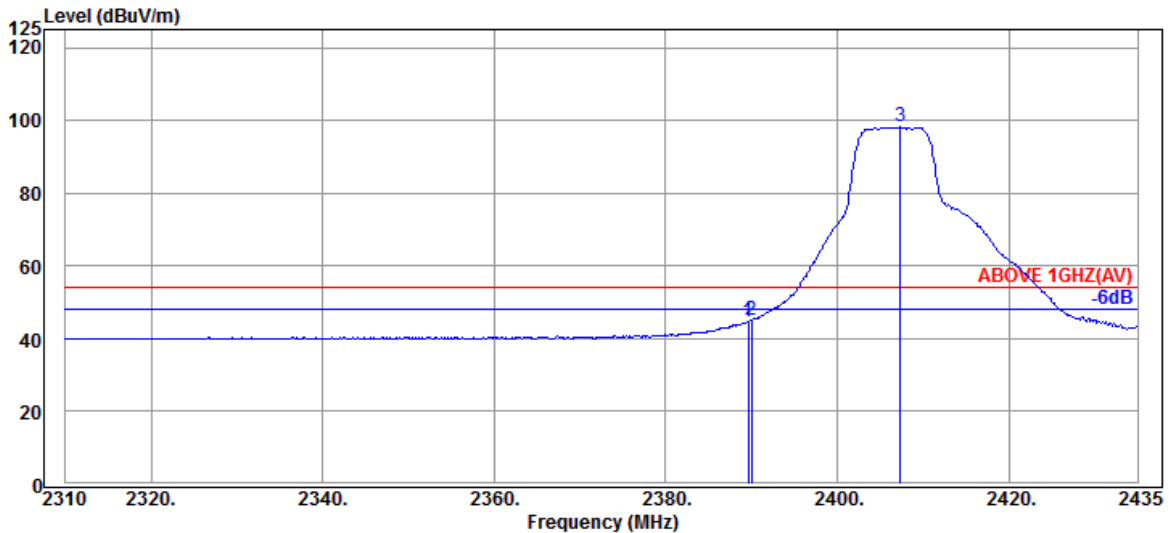


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	41.36	44.76	54.00	9.24	Average
2390.000	31.89	6.04	34.54	41.85	45.24	54.00	8.76	Average
@ 2407.375	31.87	6.07	34.54	94.77	98.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

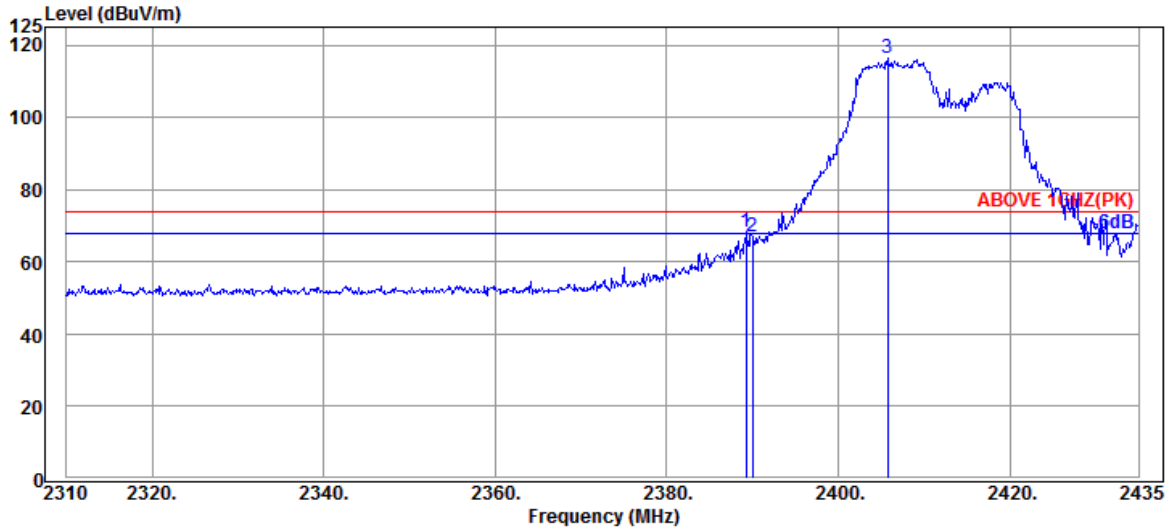

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	31.89	6.04	34.53	64.77	68.17	74.00	5.83	Peak
2390.000	31.89	6.04	34.54	63.42	66.81	74.00	7.19	Peak
@ 2405.750	31.87	6.07	34.54	112.81	116.21	---	---	Peak

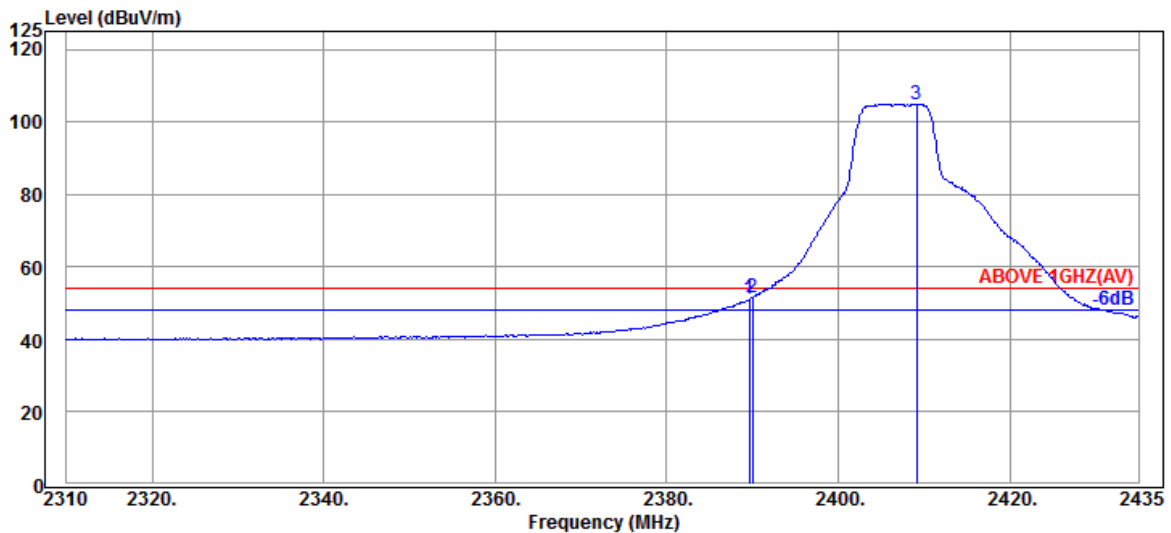


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	47.59	50.99	54.00	3.01	Average
2390.000	31.89	6.04	34.54	48.24	51.63	54.00	2.37	Average
@ 2409.125	31.87	6.07	34.54	101.45	104.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

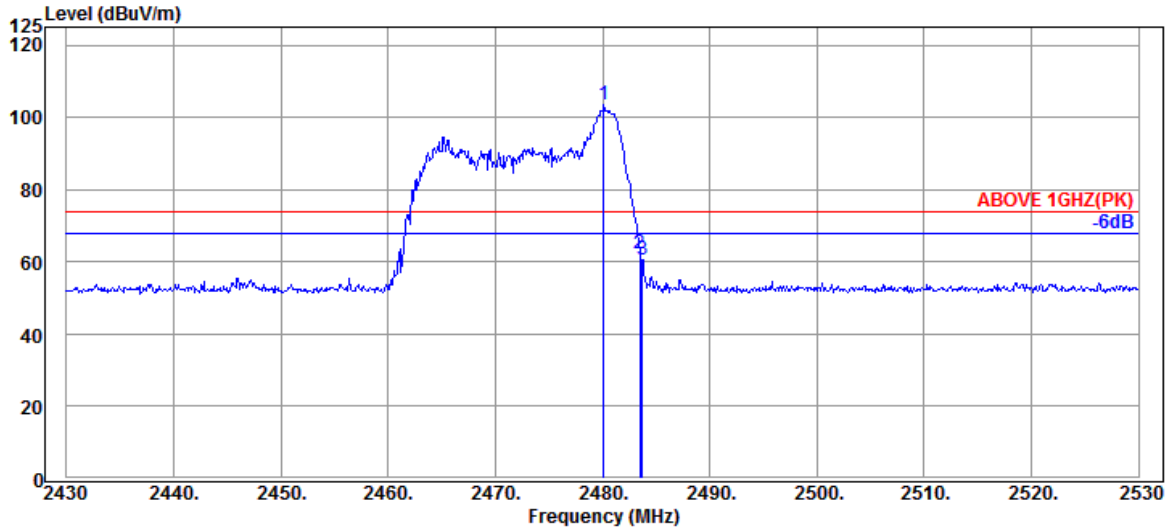

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.30	6.18	34.55	99.41	103.34	---	---	Peak
2483.500	32.30	6.18	34.55	58.14	62.07	74.00	11.93	Peak
2483.700	32.30	6.18	34.55	56.73	60.66	74.00	13.34	Peak

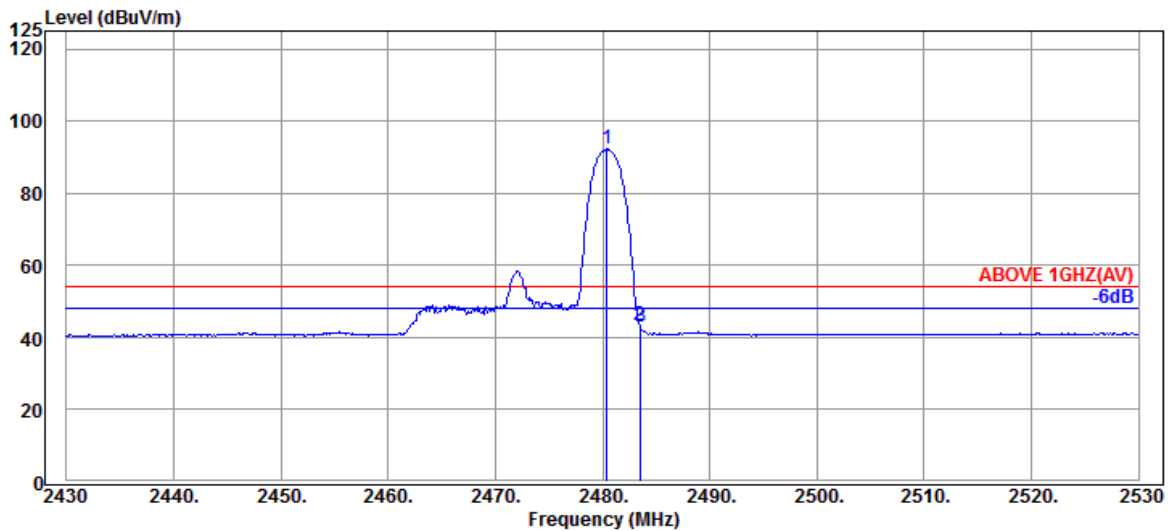


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	32.30	6.18	34.55	88.37	92.30	---	---	Average
2483.500	32.30	6.18	34.55	39.41	43.34	54.00	10.66	Average
2483.600	32.30	6.18	34.55	38.83	42.76	54.00	11.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

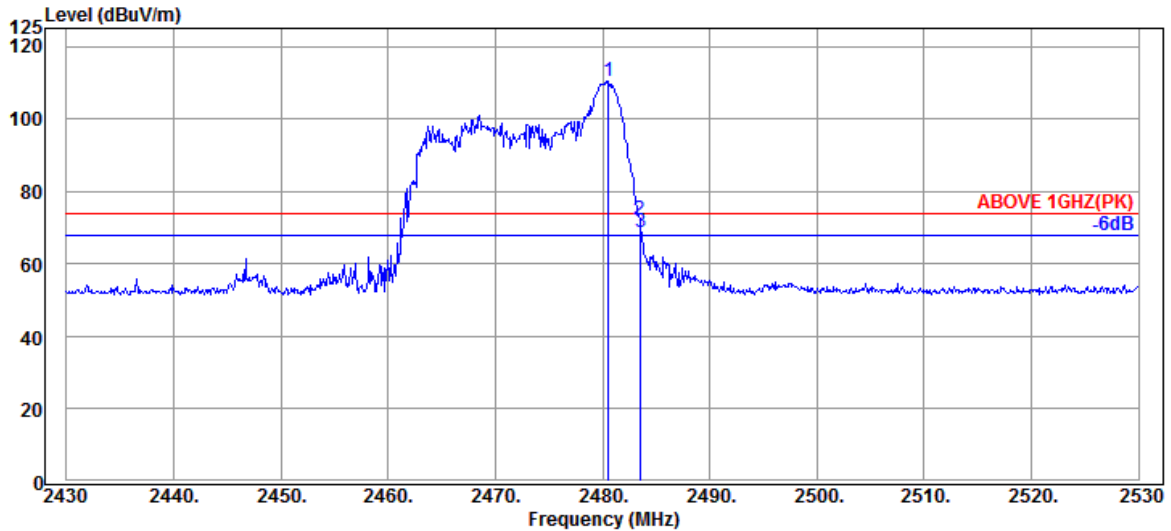

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	32.30	6.18	34.55	106.62	110.55	---	---	Peak
2483.500	32.30	6.18	34.55	68.07	72.00	74.00	2.00	Peak
2483.600	32.30	6.18	34.55	64.96	68.89	74.00	5.11	Peak

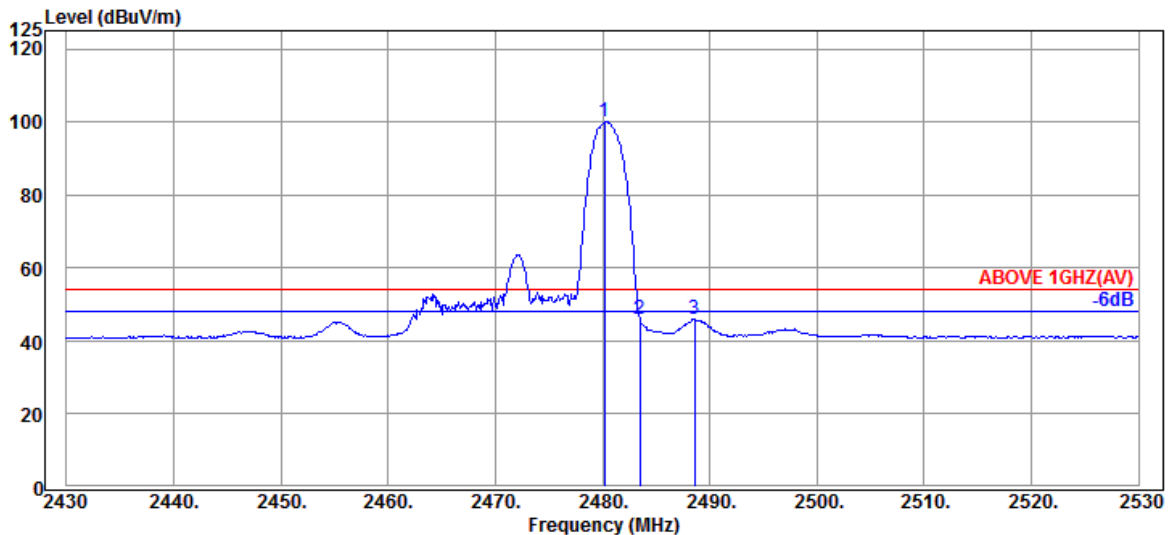


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	32.30	6.18	34.55	96.09	100.02	---	---	Average
2483.500	32.30	6.18	34.55	42.14	46.07	54.00	7.93	Average
2488.600	32.30	6.21	34.55	41.97	45.93	54.00	8.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

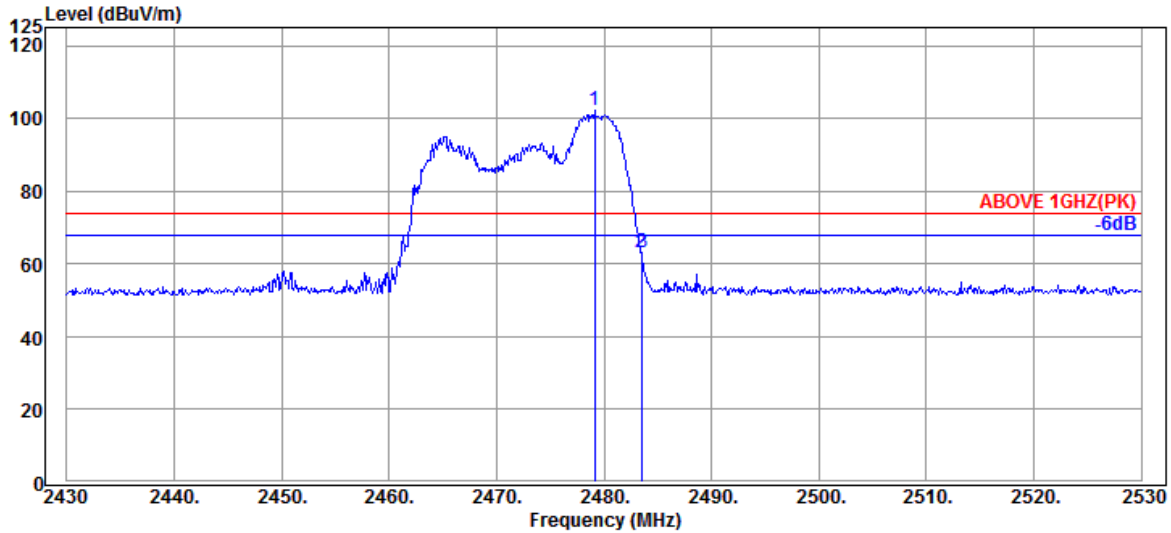

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	32.30	6.18	34.55	98.24	102.17	---	---	Peak
2483.500	32.30	6.18	34.55	59.30	63.23	74.00	10.77	Peak
2483.600	32.30	6.18	34.55	59.39	63.32	74.00	10.68	Peak

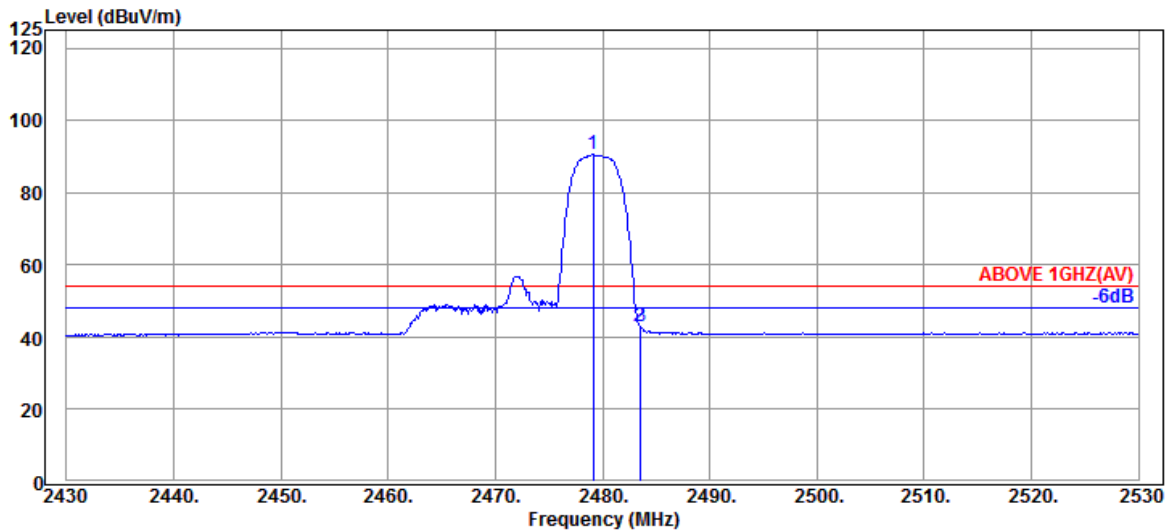


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	32.30	6.18	34.55	86.60	90.53	---	---	Average
2483.500	32.30	6.18	34.55	39.21	43.14	54.00	10.86	Average
2483.600	32.30	6.18	34.55	38.89	42.82	54.00	11.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

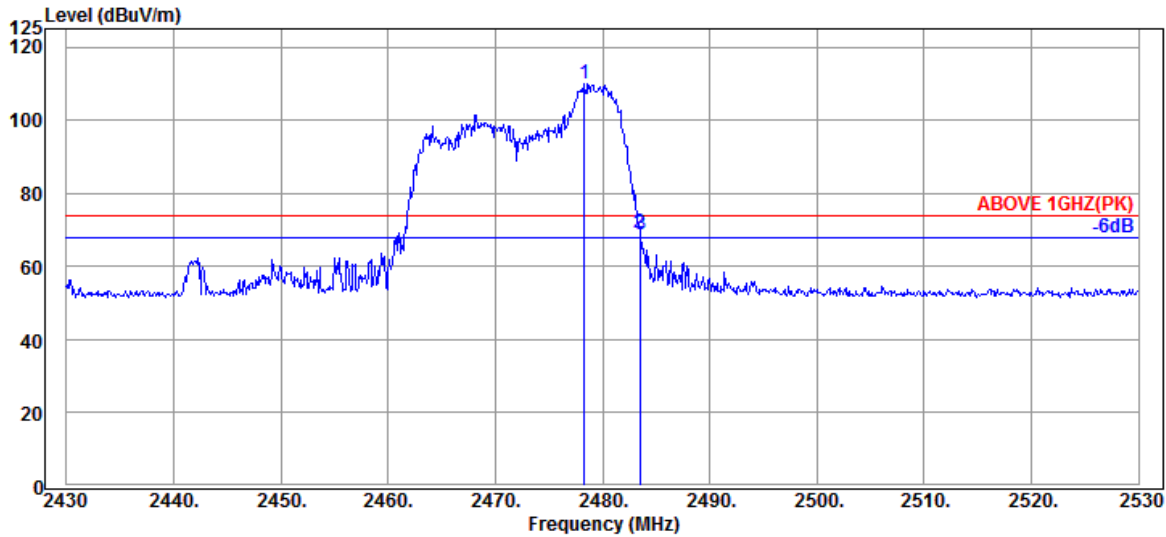

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	32.30	6.18	34.55	105.84	109.77	---	---	Peak
2483.500	32.30	6.18	34.55	65.12	69.05	74.00	4.95	Peak
2483.600	32.30	6.18	34.55	65.00	68.93	74.00	5.07	Peak

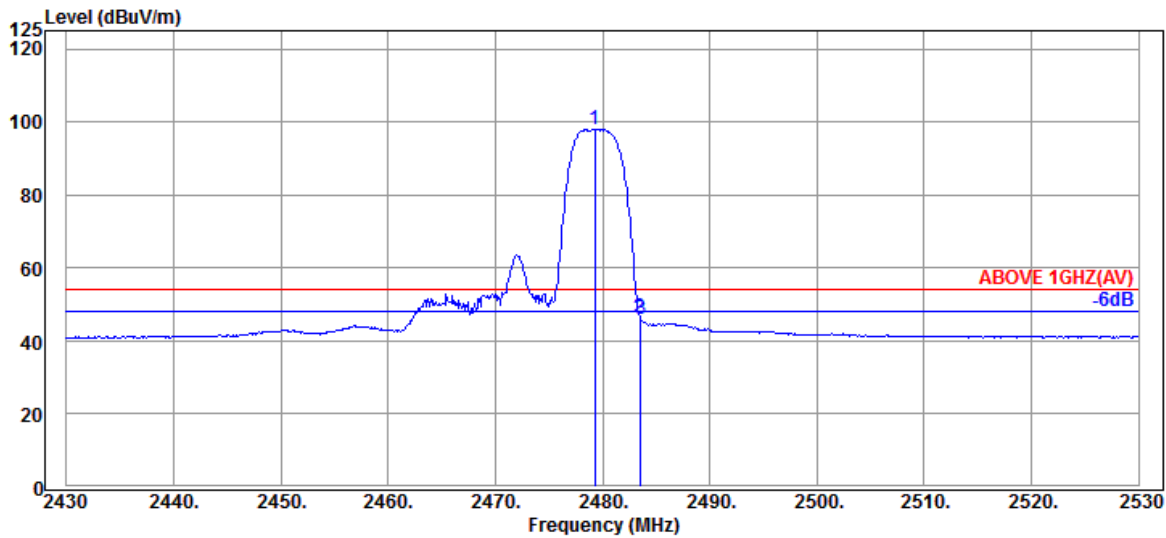


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	32.30	6.18	34.55	93.93	97.86	---	---	Average
2483.500	32.30	6.18	34.55	42.66	46.59	54.00	7.41	Average
2483.600	32.30	6.18	34.55	42.12	46.05	54.00	7.95	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

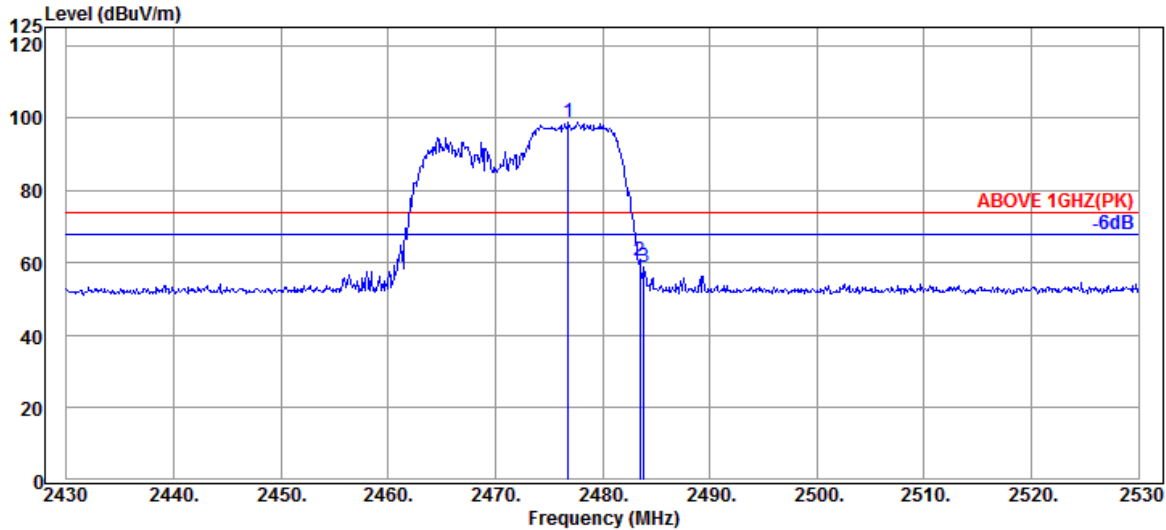

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.800	32.30	6.18	34.55	94.82	98.75	---	---	Peak
2483.500	32.30	6.18	34.55	56.64	60.57	74.00	13.43	Peak
2483.900	32.30	6.18	34.55	55.11	59.04	74.00	14.96	Peak

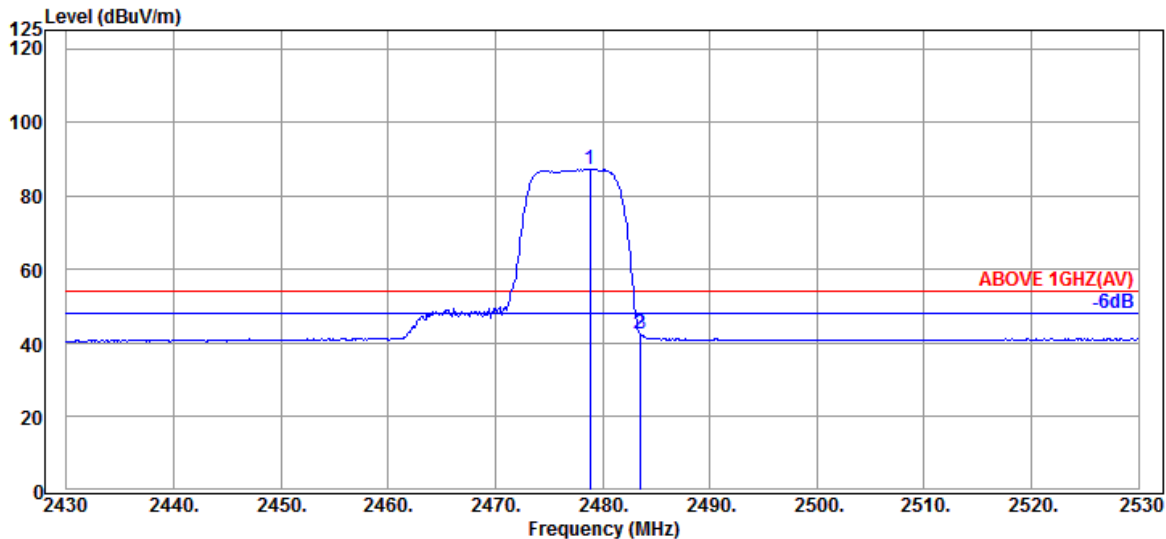


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	32.30	6.18	34.55	83.45	87.38	---	---	Average
2483.500	32.30	6.18	34.55	38.79	42.72	54.00	11.28	Average
2483.600	32.30	6.18	34.55	38.43	42.36	54.00	11.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

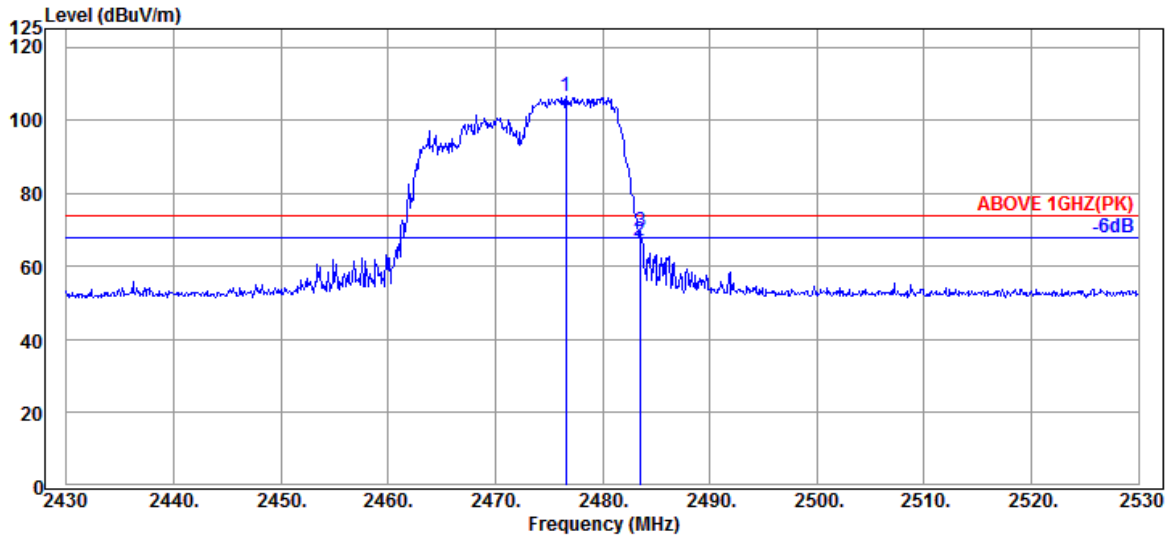

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	32.30	6.18	34.55	102.51	106.44	---	---	Peak
2483.500	32.30	6.18	34.55	63.00	66.93	74.00	7.07	Peak
2483.600	32.30	6.18	34.55	65.83	69.76	74.00	4.24	Peak

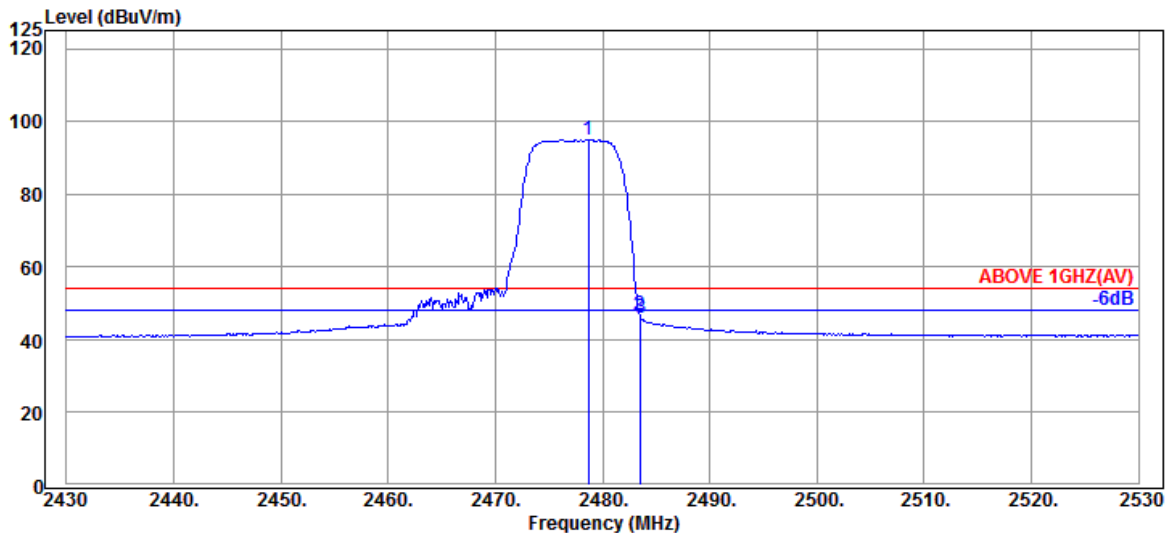

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	32.30	6.18	34.55	91.05	94.98	---	---	Average
2483.500	32.30	6.18	34.55	42.84	46.77	54.00	7.23	Average
2483.600	32.30	6.18	34.55	42.15	46.08	54.00	7.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.