


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	149
A.2.3 Emissions in Non-restricted Frequency Bands.....	164
A.3 EMISSION/OCCUPIED BANDWIDTH	165
A.3.1 Emission/Occupied Bandwidth Result	165
A.3.2 Measurement Plots	170
A.4 MAXIMUM OUTPUT POWER	195
A.4.1 Average Output Power	195
A.4.2 Measurement Plots	205
A.5 POWER SPECTRAL DENSITY	213
A.5.1 Power Spectral Density Result	213
A.5.2 Measurement Plots	217
A.6 FREQUENCY STABILITY	236
A.6.1 Frequency stability Result	236

A.1 CONDUCTED EMISSION

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90Q

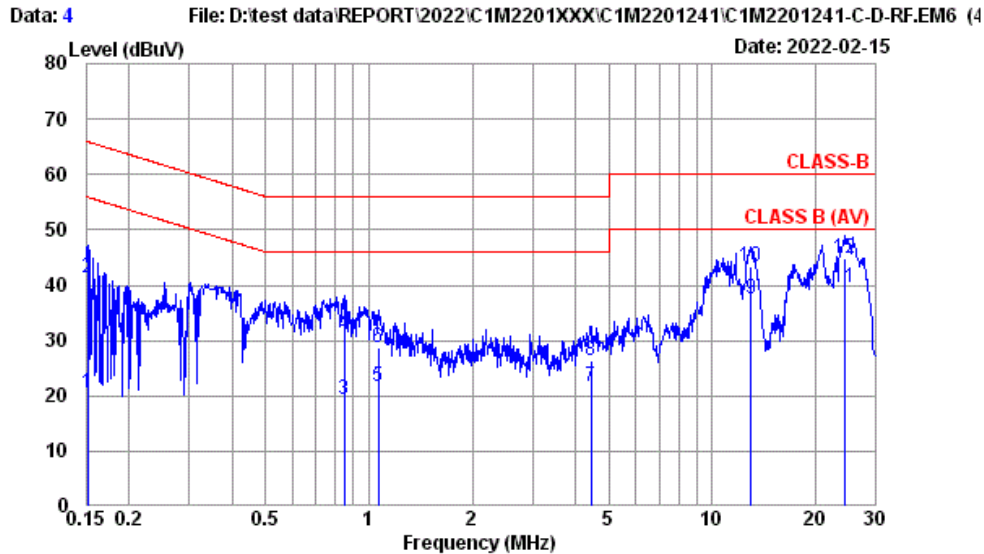


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 23°C / 60%	Engineer	: Chucky Chiu
EUT Model	: 17Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating INPAQ		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	0.24	20.53	55.91	35.38	Average
2	0.152	10.41	0.03	9.85	21.14	41.43	65.91	24.48	QP
3	0.848	10.38	0.04	9.85	-0.84	19.43	46.00	26.57	Average
4	0.848	10.38	0.04	9.85	10.76	31.03	56.00	24.97	QP
5	1.065	10.38	0.04	9.85	1.43	21.70	46.00	24.30	Average
6	1.065	10.38	0.04	9.85	8.31	28.58	56.00	27.42	QP
7	4.430	10.47	0.09	9.86	1.21	21.63	46.00	24.37	Average
8	4.430	10.47	0.09	9.86	5.89	26.31	56.00	29.69	QP
9	12.988	10.84	0.16	9.90	16.72	37.62	50.00	12.38	Average
10	12.988	10.84	0.16	9.90	22.44	43.34	60.00	16.66	QP
11	24.271	11.23	0.22	9.97	18.06	39.48	50.00	10.52	Average
12	24.271	11.23	0.22	9.97	23.46	44.88	60.00	15.12	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90Q

Data: 3 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF.EM6 (4) Date: 2022-02-15

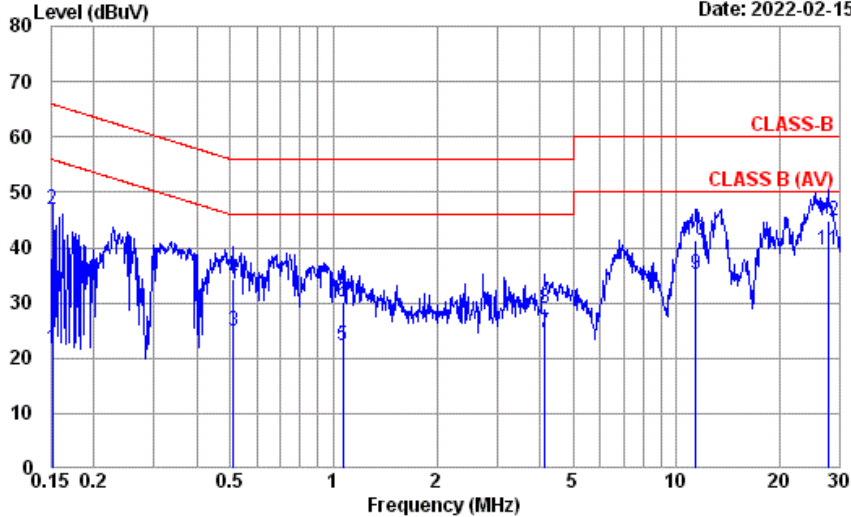


Site No. : No.8 Shielded Room Data No. : 3
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 23°C / 60% Engineer : Chucky Chiu
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	1.51	21.79	55.91	34.12	Average
2	0.152	10.40	0.03	9.85	26.57	46.85	65.91	19.06	QP
3	0.510	10.37	0.03	9.85	4.54	24.79	46.00	21.21	Average
4	0.510	10.37	0.03	9.85	14.18	34.43	56.00	21.57	QP
5	1.065	10.38	0.04	9.85	1.95	22.22	46.00	23.78	Average
6	1.065	10.38	0.04	9.85	9.87	30.14	56.00	25.86	QP
7	4.136	10.42	0.09	9.86	4.26	24.63	46.00	21.37	Average
8	4.136	10.42	0.09	9.86	8.55	28.92	56.00	27.08	QP
9	11.377	10.60	0.15	9.90	14.56	35.21	50.00	14.79	Average
10	11.377	10.60	0.15	9.90	20.74	41.39	60.00	18.61	QP
11	27.708	10.85	0.23	9.99	18.48	39.55	50.00	10.45	Average
12	27.708	10.85	0.23	9.99	23.75	44.82	60.00	15.18	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90Q

Data: 1 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF-EM6 (4) Date: 2022-02-15

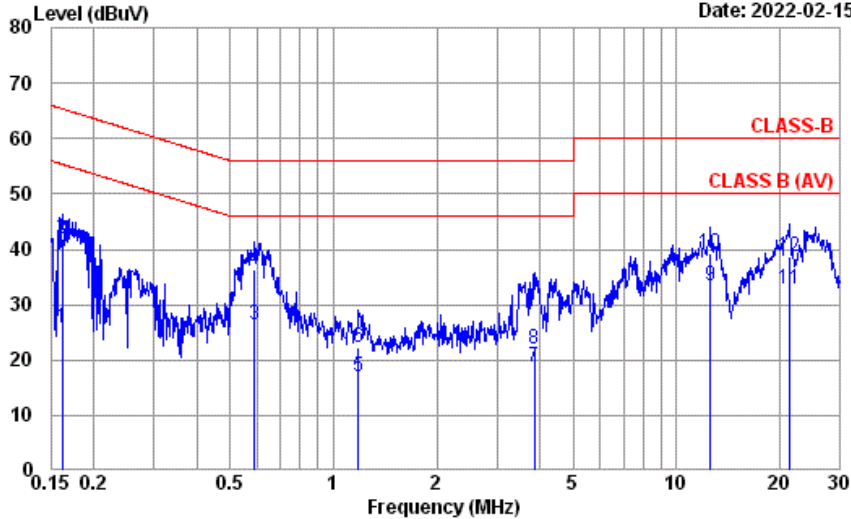


Site No. : No.8 Shielded Room Data No. : 1
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 23°C / 60% Engineer : Chucky Chiu
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	5.63	25.91	55.38	29.47	Average
2	0.162	10.40	0.03	9.85	21.66	41.94	65.38	23.44	QP
3	0.589	10.37	0.03	9.85	6.07	26.32	46.00	19.68	Average
4	0.589	10.37	0.03	9.85	16.16	36.41	56.00	19.59	QP
5	1.184	10.39	0.04	9.85	-3.41	16.87	46.00	29.13	Average
6	1.184	10.39	0.04	9.85	1.91	22.19	56.00	33.81	QP
7	3.860	10.45	0.09	9.86	-1.61	18.79	46.00	27.21	Average
8	3.860	10.45	0.09	9.86	1.43	21.83	56.00	34.17	QP
9	12.582	10.82	0.15	9.90	12.66	33.53	50.00	16.47	Average
10	12.582	10.82	0.15	9.90	18.41	39.28	60.00	20.72	QP
11	21.260	11.14	0.20	9.95	11.51	32.80	50.00	17.20	Average
12	21.260	11.14	0.20	9.95	17.25	38.54	60.00	21.46	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90Q

Data: 2 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201241\C1M2201241-C-D-RF.EM6 (4 Date: 2022-02-15

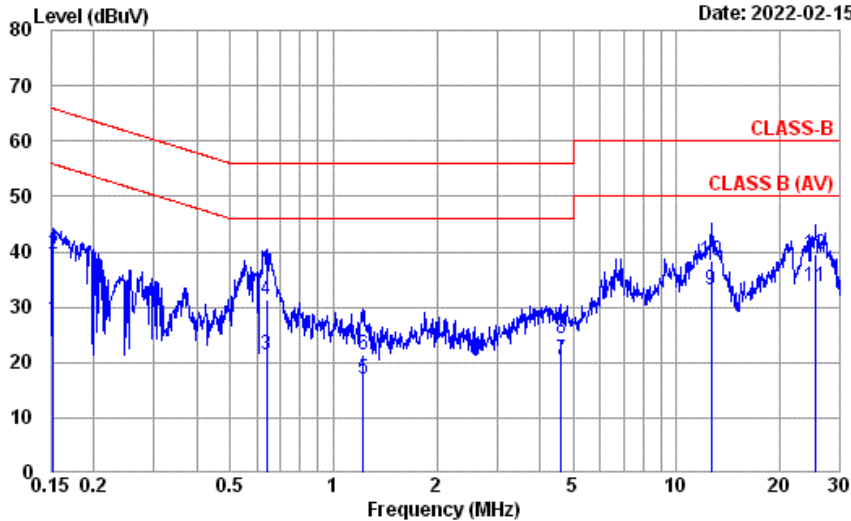

Site No. : No.8 Shielded Room Data No. : 2
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 23°C / 60% Engineer : Chucky Chiu
 EUT Model : 17Z90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	7.69	27.97	55.87	27.90	Average
2	0.152	10.40	0.03	9.85	19.28	39.56	65.87	26.31	QP
3	0.637	10.38	0.04	9.85	1.18	21.45	46.00	24.55	Average
4	0.637	10.38	0.04	9.85	11.23	31.50	56.00	24.50	QP
5	1.223	10.39	0.04	9.85	-3.26	17.02	46.00	28.98	Average
6	1.223	10.39	0.04	9.85	1.01	21.29	56.00	34.71	QP
7	4.598	10.44	0.10	9.87	0.13	20.54	46.00	25.46	Average
8	4.598	10.44	0.10	9.87	3.94	24.35	56.00	31.65	QP
9	12.649	10.63	0.16	9.90	12.51	33.20	50.00	16.80	Average
10	12.649	10.63	0.16	9.90	17.77	38.46	60.00	21.54	QP
11	25.456	10.83	0.22	9.97	12.66	33.68	50.00	16.32	Average
12	25.456	10.83	0.22	9.97	18.55	39.57	60.00	20.43	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/01/18 ~ 02/14	Temp./Hum.	19 ~ 20°C/66 ~ 68%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SISO Mode: SKU #2 (with LUXSHARE-ICT Antenna) MIMO Mode: SKU #1 (with INPAQ Antenna) for UNII Band 2C SKU #2 (with LUXSHARE-ICT Antenna) for UNII Band 1/2A/III		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

- **Test SKU #1 (with INPAQ Antenna)**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	42.27	34.30	40.00	5.70	Peak
152.220	16.17	2.88	32.28	44.37	31.14	43.50	12.36	Peak
423.820	21.83	5.77	32.23	43.75	39.12	46.00	6.88	Peak
593.570	24.23	6.75	32.31	38.60	37.27	46.00	8.73	Peak
881.660	26.24	8.33	31.57	40.51	43.51	46.00	2.49	Peak
979.630	26.96	8.86	30.73	30.60	35.69	54.00	18.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	44.78	36.81	40.00	3.19	Peak
127.970	17.55	2.62	32.31	45.07	32.93	43.50	10.57	Peak
423.820	21.83	5.77	32.23	46.22	41.59	46.00	4.41	Peak
593.570	24.23	6.75	32.31	36.50	35.17	46.00	10.83	Peak
887.480	26.26	8.37	31.53	35.89	38.99	46.00	7.01	Peak
965.080	26.85	8.79	30.89	31.67	36.42	54.00	17.58	Peak

● **Test SKU #2 (with LUXSHARE-ICT Antenna)**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
83.350	13.50	2.07	32.37	43.90	27.10	40.00	12.90	Peak
215.270	16.12	3.53	32.24	44.59	32.00	43.50	11.50	Peak
423.820	21.83	5.77	32.23	47.53	42.90	46.00	3.10	Peak
677.960	24.68	7.17	32.13	42.23	41.95	46.00	4.05	Peak
847.710	26.12	8.12	31.71	41.08	43.61	46.00	2.39	Peak
966.050	26.85	8.79	30.89	29.57	34.32	54.00	19.68	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	32.43	43.77	35.10	40.00	4.90	Peak
119.240	17.95	2.52	32.32	42.62	30.77	43.50	12.73	Peak
423.820	21.83	5.77	32.23	48.33	43.70	46.00	2.30	Peak
677.960	24.68	7.17	32.13	41.14	40.86	46.00	5.14	Peak
847.710	26.12	8.12	31.71	37.66	40.19	46.00	5.81	Peak
976.720	26.94	8.85	30.81	29.33	34.31	54.00	19.69	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

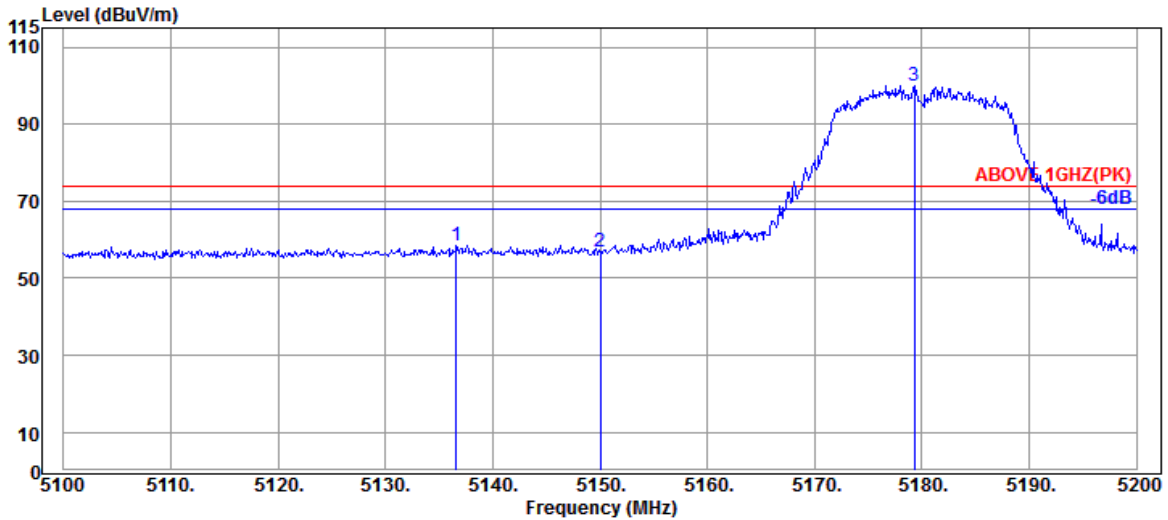

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.600	34.17	8.91	34.36	49.79	58.51	74.00	15.49	Peak
5150.000	34.20	8.92	34.35	48.25	57.02	74.00	16.98	Peak
@ 5179.300	34.20	8.95	34.34	91.13	99.94	---	---	Peak

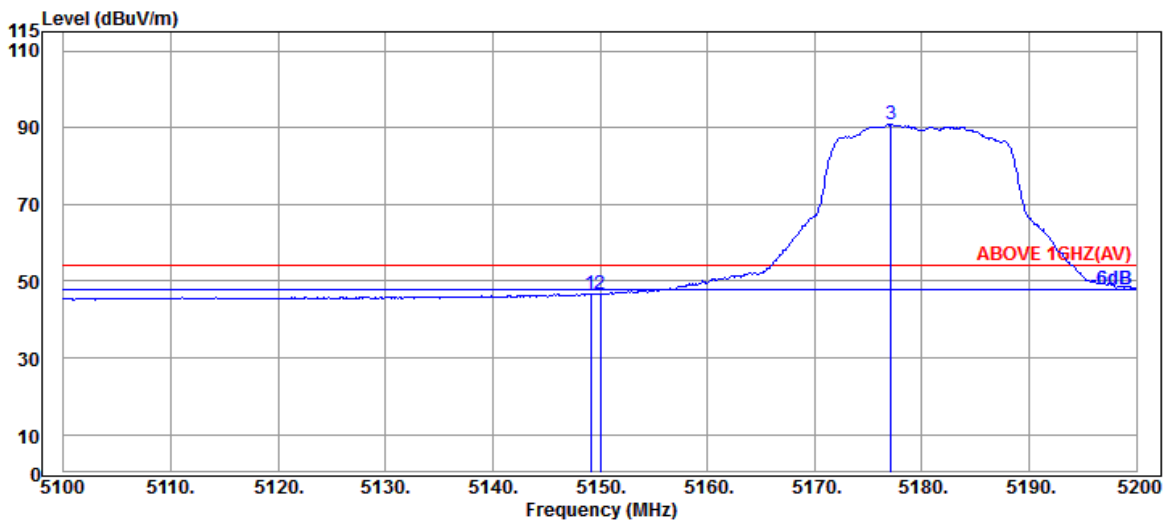


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.20	8.92	34.35	37.98	46.75	54.00	7.25	Average
5150.000	34.20	8.92	34.35	37.78	46.55	54.00	7.45	Average
@ 5177.100	34.20	8.95	34.34	81.96	90.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

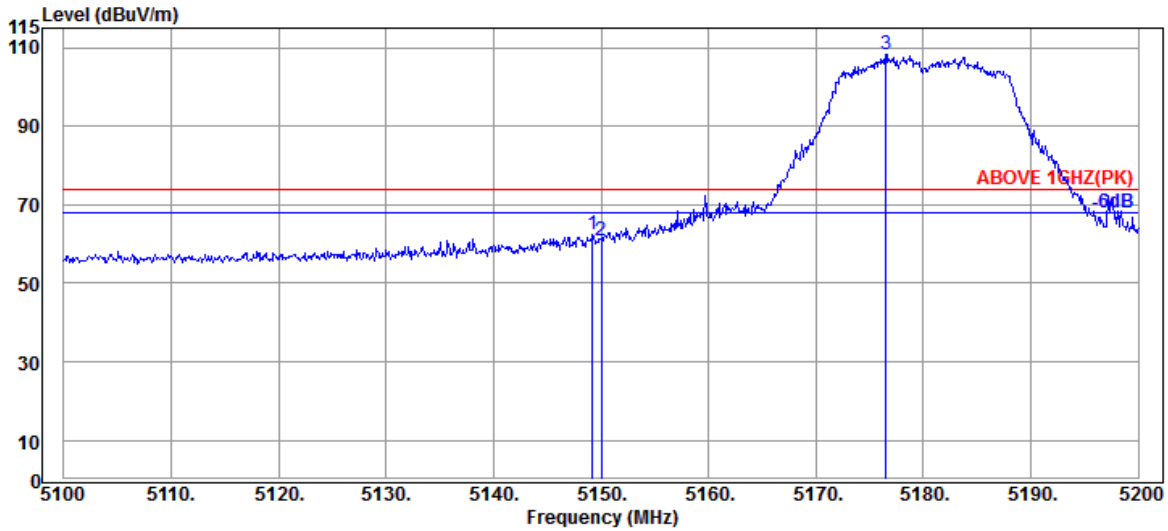

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	8.92	34.35	53.52	62.29	74.00	11.71	Peak
5150.000	34.20	8.92	34.35	52.11	60.88	74.00	13.12	Peak
@ 5176.500	34.20	8.95	34.34	99.41	108.22	---	---	Peak

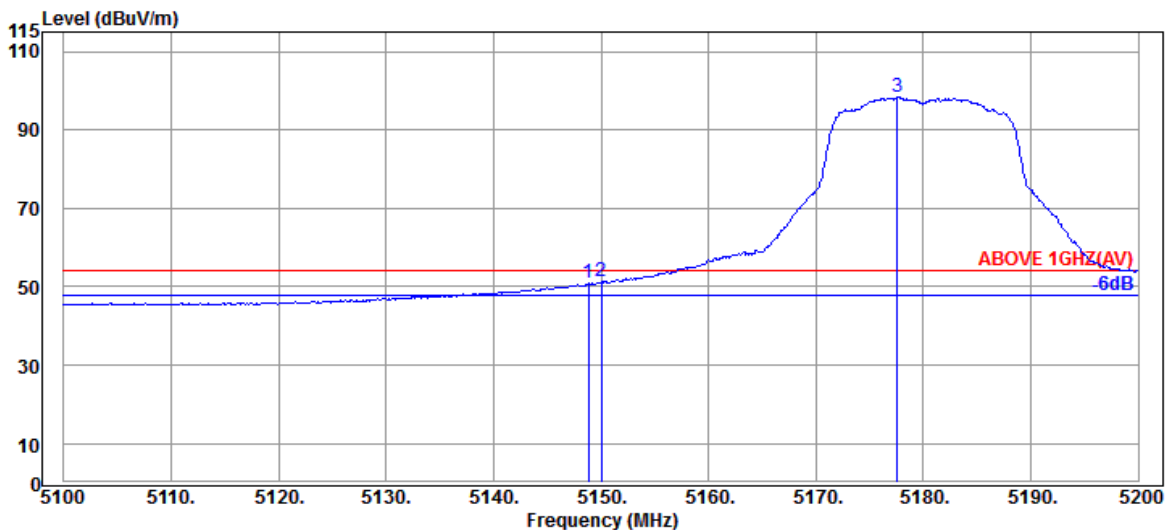


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	8.92	34.35	42.20	50.97	54.00	3.03	Average
5150.000	34.20	8.92	34.35	42.43	51.20	54.00	2.80	Average
@ 5177.600	34.20	8.95	34.34	89.48	98.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

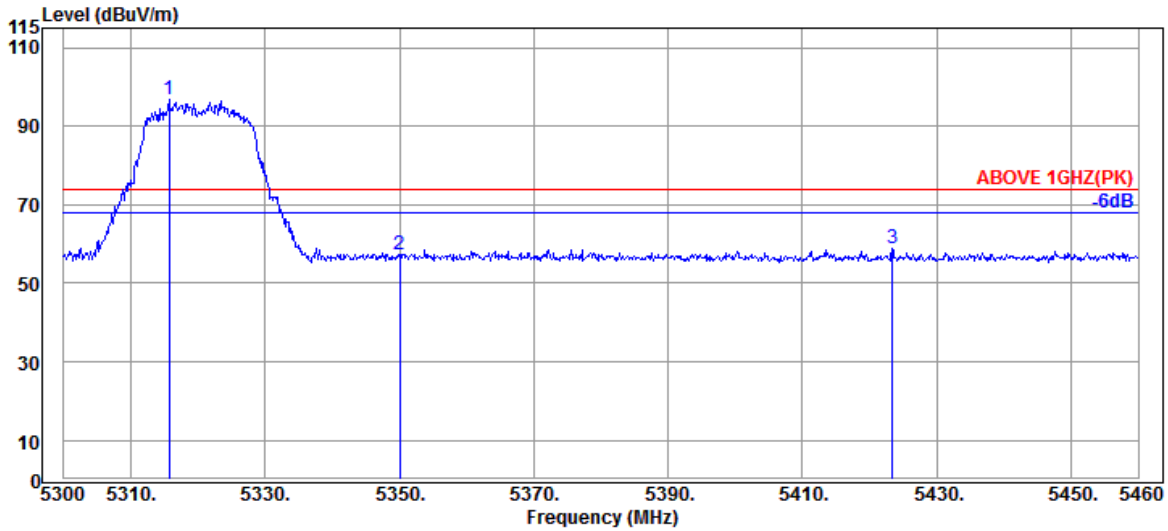

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.680	34.53	9.07	34.29	87.63	96.94	---	---	Peak
5350.080	34.60	9.10	34.27	47.87	57.30	74.00	16.70	Peak
5423.360	34.60	9.15	34.26	49.43	58.92	74.00	15.08	Peak

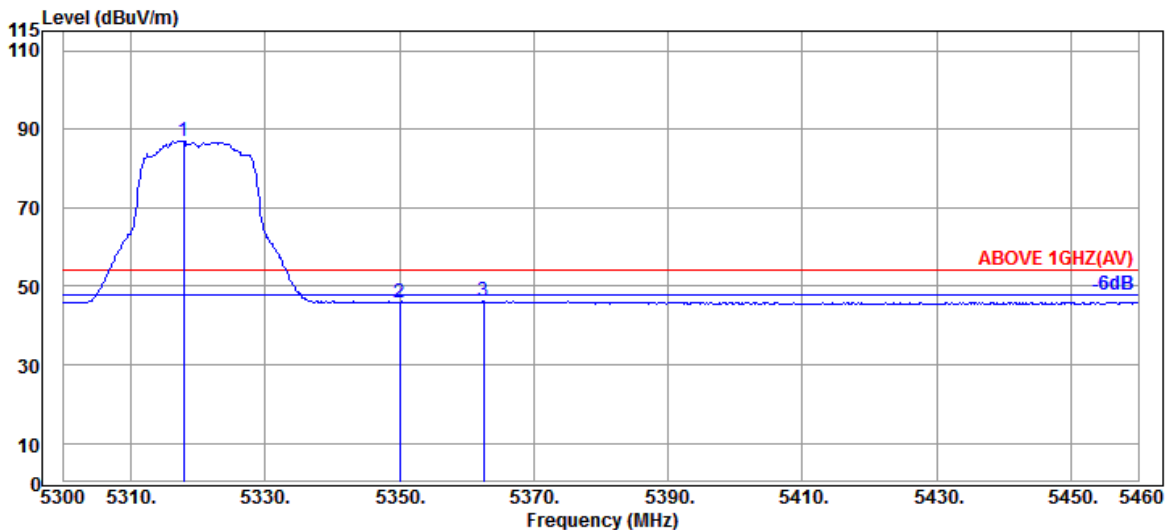


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	34.53	9.07	34.29	77.78	87.09	---	---	Average
5350.080	34.60	9.10	34.27	36.51	45.94	54.00	8.06	Average
5362.560	34.63	9.11	34.27	36.62	46.09	54.00	7.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

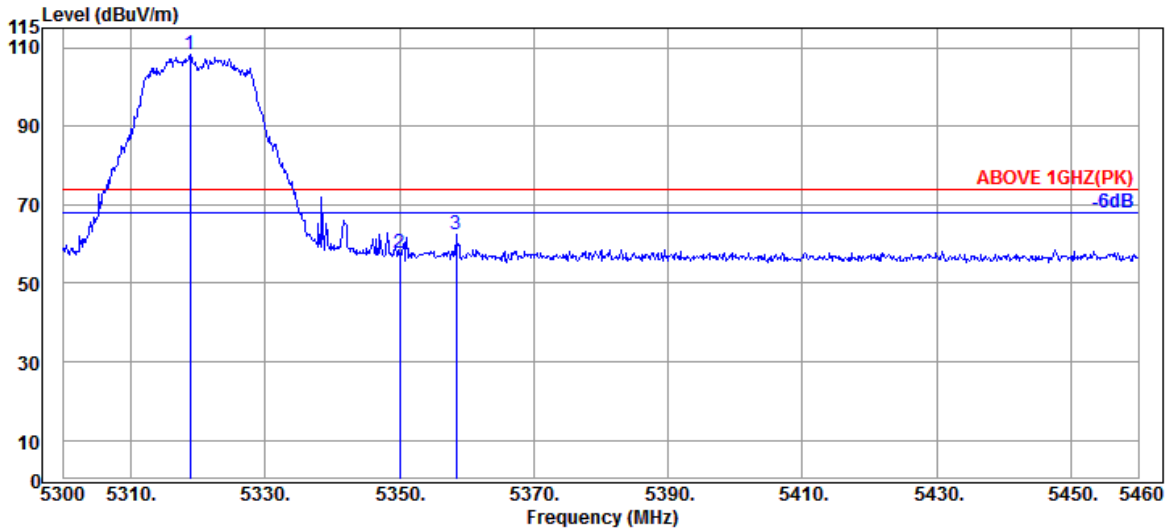

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.880	34.53	9.07	34.29	98.83	108.14	---	---	Peak
5350.080	34.60	9.10	34.27	48.12	57.55	74.00	16.45	Peak
5358.400	34.63	9.10	34.27	53.01	62.47	74.00	11.53	Peak

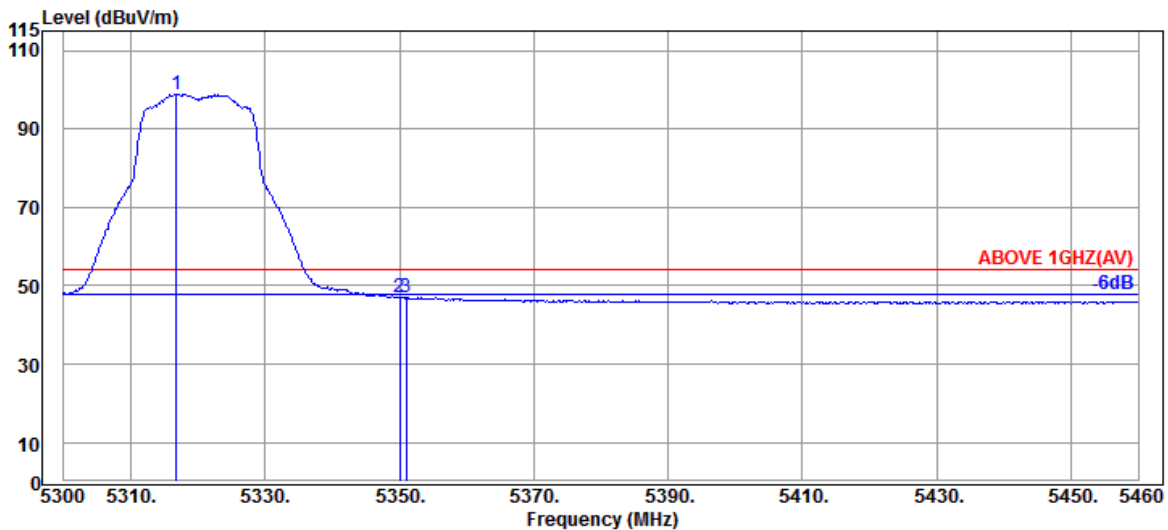


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	9.07	34.29	89.58	98.89	---	---	Average
5350.080	34.60	9.10	34.27	37.64	47.07	54.00	6.93	Average
5351.040	34.60	9.10	34.27	37.57	47.00	54.00	7.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

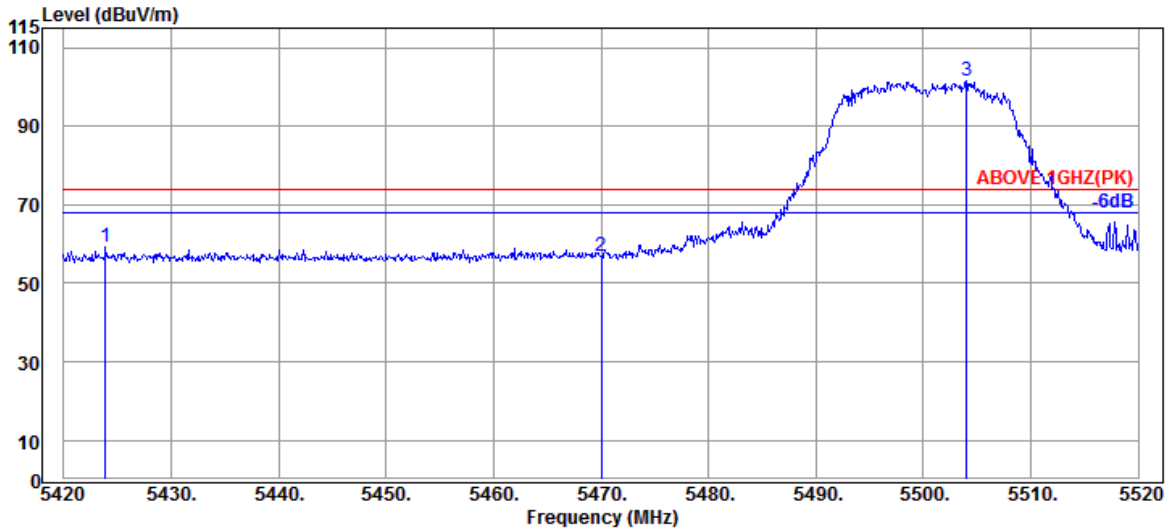

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.900	34.60	9.15	34.26	49.70	59.19	74.00	14.81	Peak
5470.000	34.47	9.20	34.24	47.65	57.08	74.00	16.92	Peak
@ 5504.000	34.40	9.23	34.24	92.09	101.48	---	---	Peak

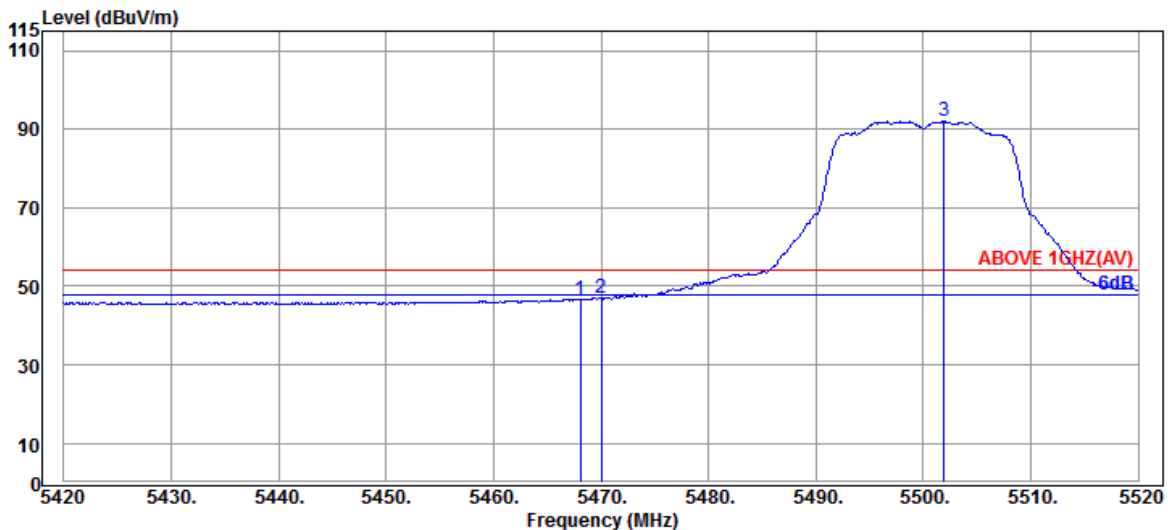


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.47	9.20	34.24	37.36	46.79	54.00	7.21	Average
5470.000	34.47	9.20	34.24	37.52	46.95	54.00	7.05	Average
@ 5501.900	34.40	9.23	34.24	82.71	92.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

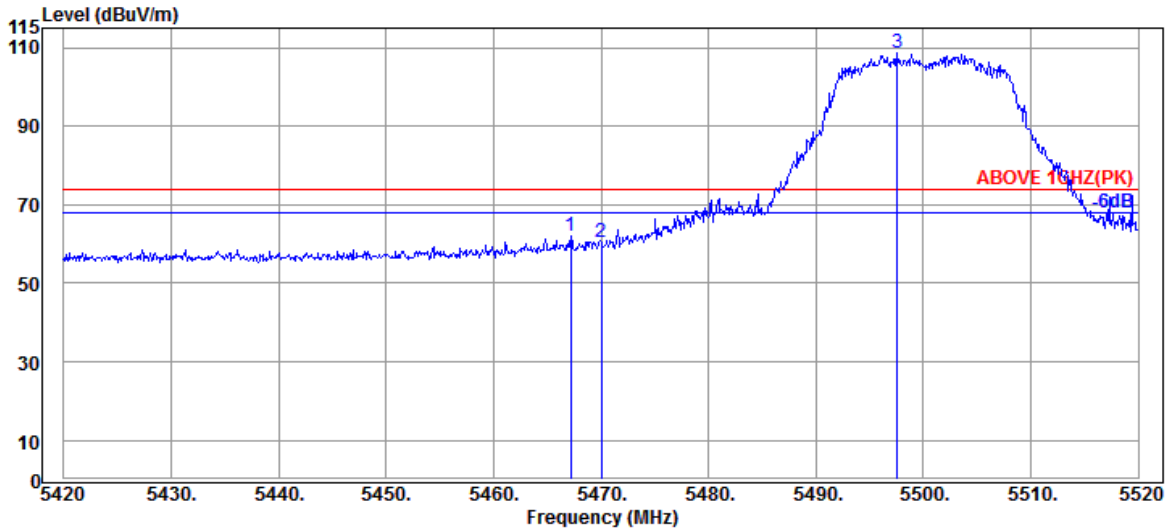

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.47	9.20	34.24	52.56	61.99	74.00	12.01	Peak
5470.000	34.47	9.20	34.24	50.95	60.38	74.00	13.62	Peak
@ 5497.600	34.40	9.23	34.23	99.37	108.77	---	---	Peak

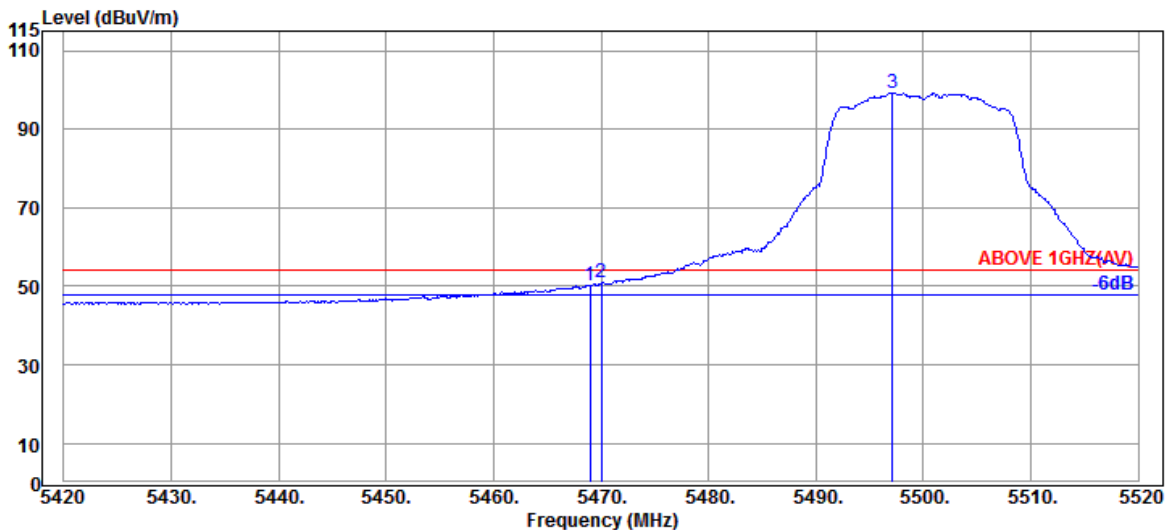


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	9.20	34.24	40.91	50.34	54.00	3.66	Average
5470.000	34.47	9.20	34.24	41.41	50.84	54.00	3.16	Average
@ 5497.100	34.40	9.23	34.23	89.90	99.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

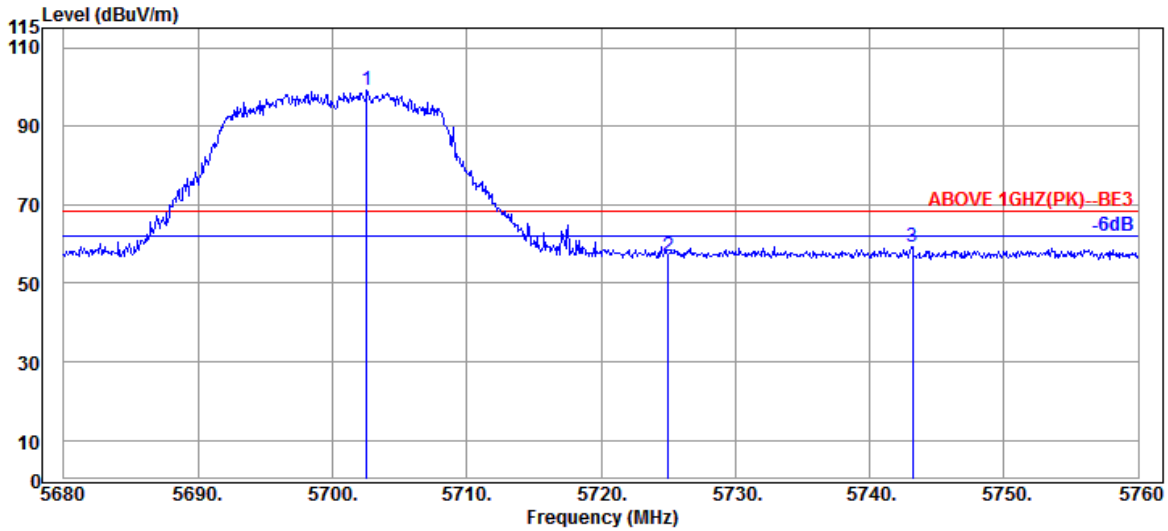

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.560	34.40	9.40	34.31	89.82	99.31	---	---	Peak
5725.040	34.67	9.42	34.32	47.00	56.77	68.20	11.43	Peak
5743.200	34.80	9.43	34.33	49.33	59.23	68.20	8.97	Peak

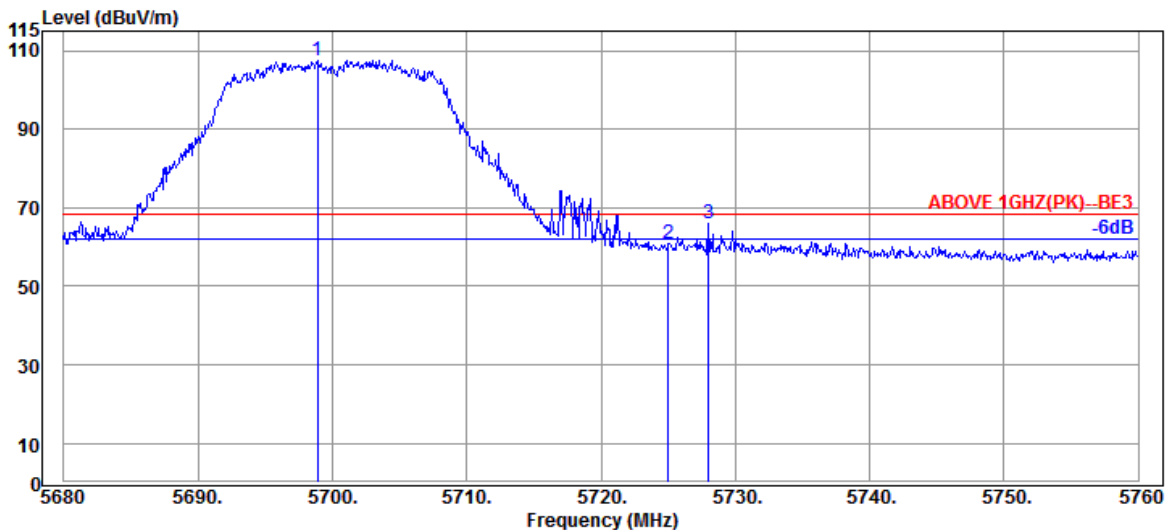


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.880	34.40	9.39	34.31	98.13	107.61	---	---	Peak
5725.040	34.67	9.42	34.32	51.24	61.01	68.20	7.19	Peak
5728.000	34.67	9.42	34.32	56.37	66.14	68.20	2.06	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

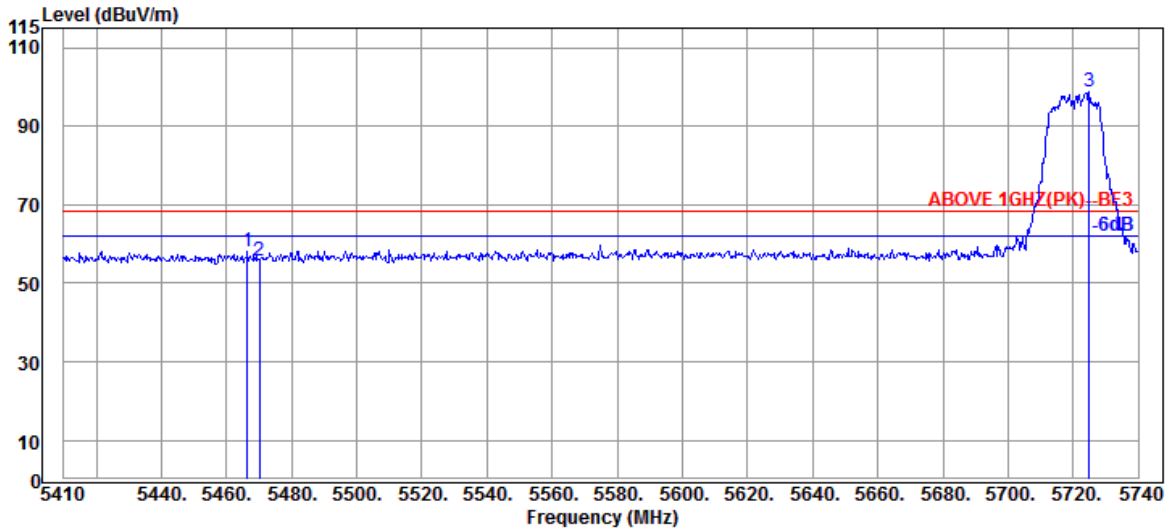

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.47	9.20	34.24	48.60	58.03	68.20	10.17	Peak
5470.060	34.47	9.20	34.24	46.47	55.90	68.20	12.30	Peak
@ 5724.820	34.67	9.42	34.32	88.93	98.70	---	---	Peak

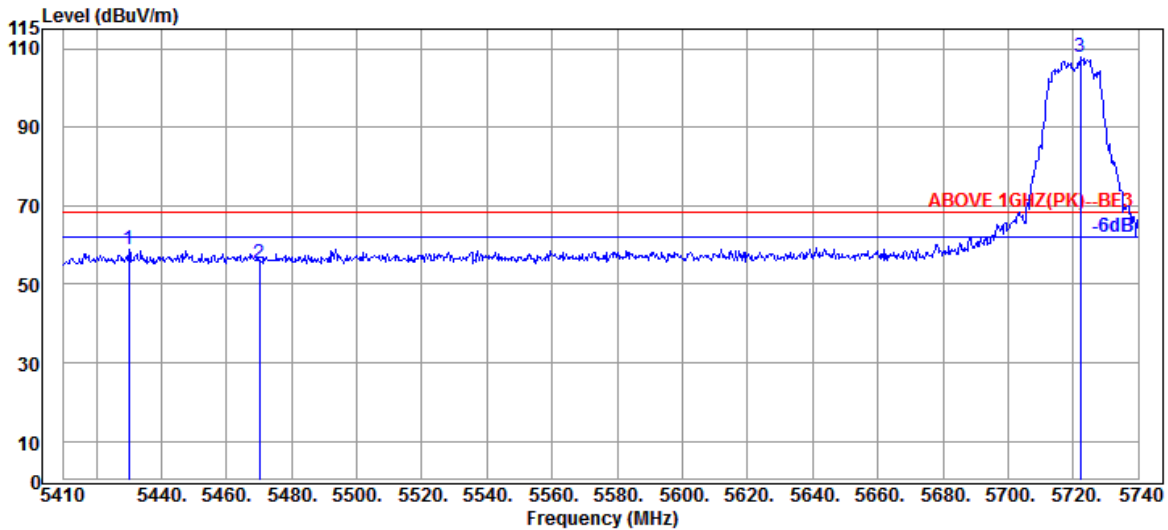


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.130	34.60	9.17	34.25	49.35	58.87	68.20	9.33	Peak
5470.060	34.47	9.20	34.24	45.91	55.34	68.20	12.86	Peak
@ 5722.180	34.67	9.42	34.32	97.94	107.71	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

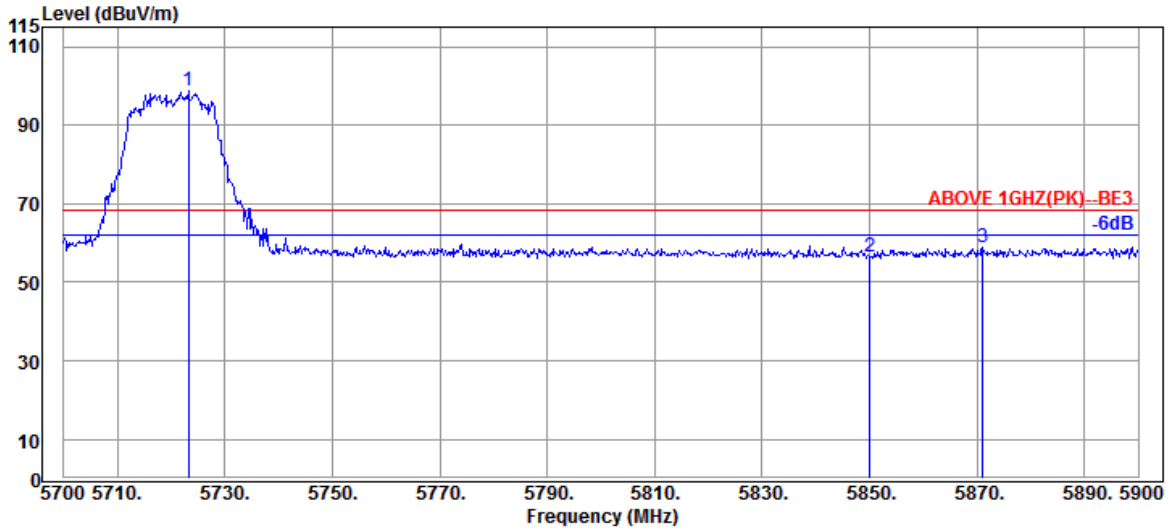

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.200	34.67	9.42	34.32	88.85	98.62	---	---	Peak
5850.000	35.10	9.52	34.38	46.36	56.60	68.20	11.60	Peak
5871.000	35.20	9.55	34.39	48.65	59.01	68.20	9.19	Peak

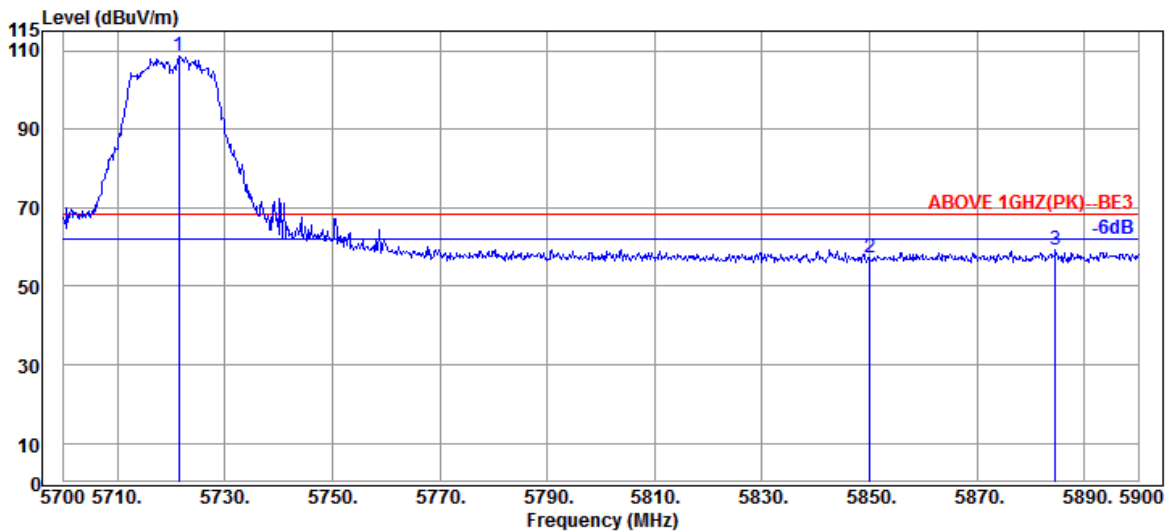


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.400	34.53	9.42	34.32	98.88	108.51	---	---	Peak
5850.000	35.10	9.52	34.38	46.99	57.23	68.20	10.97	Peak
5884.600	35.30	9.55	34.40	48.67	59.12	68.20	9.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

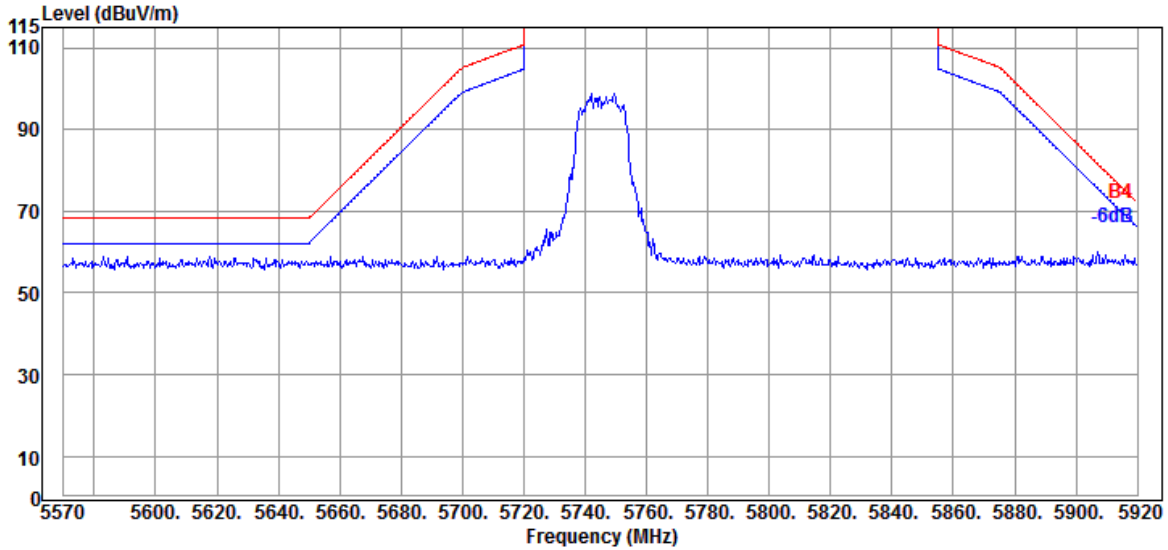


Antenna at Vertical Polarization

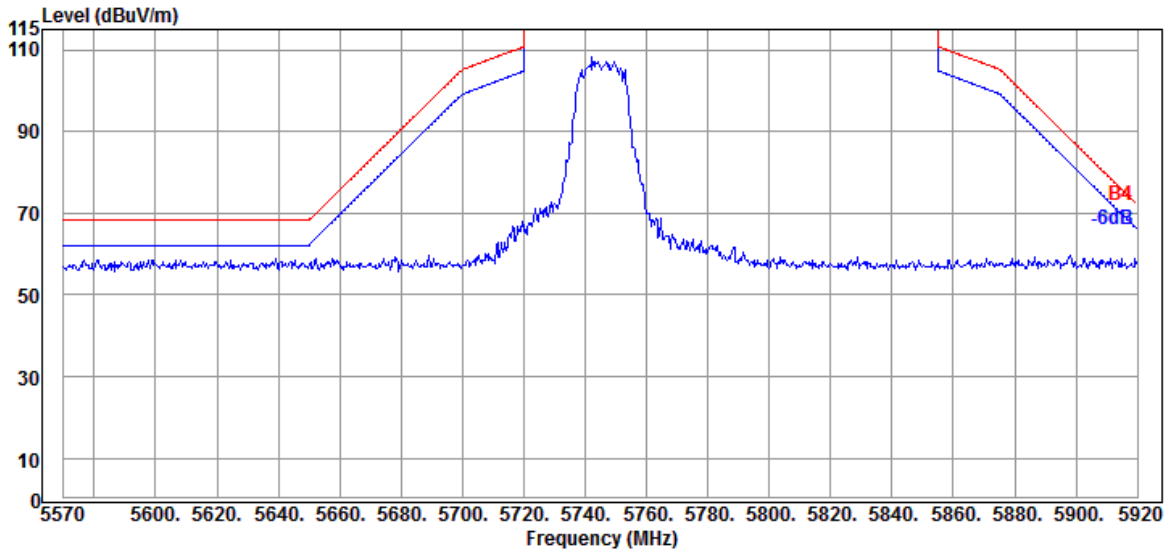


Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

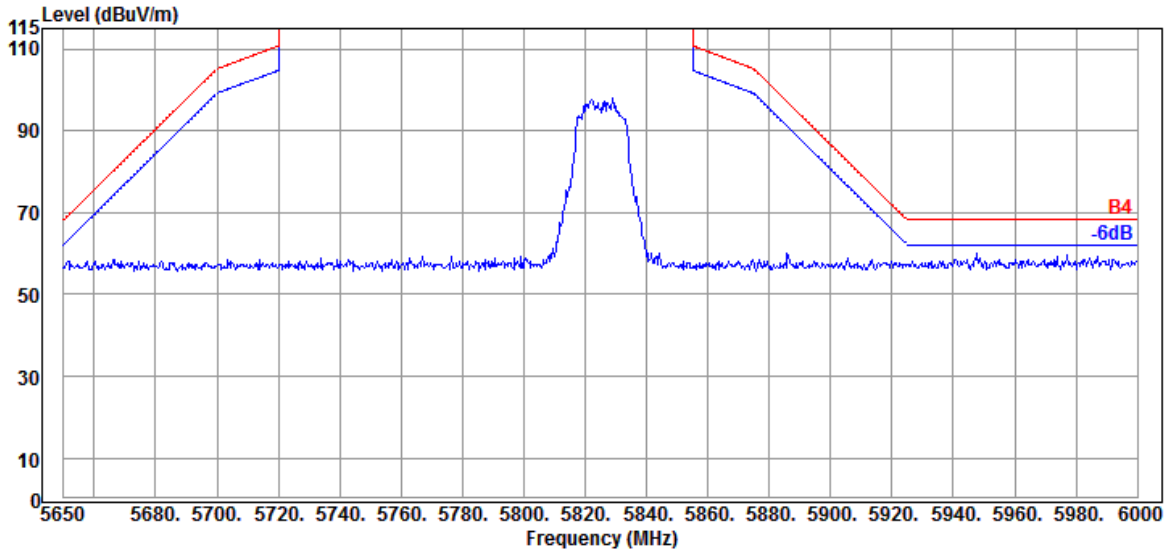

Antenna at Vertical Polarization

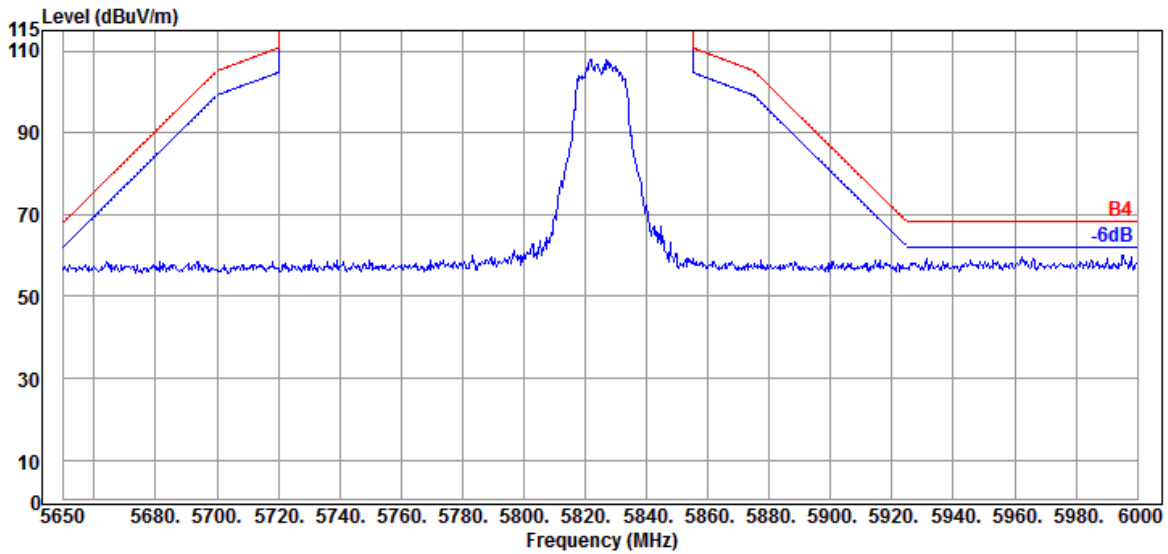


Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

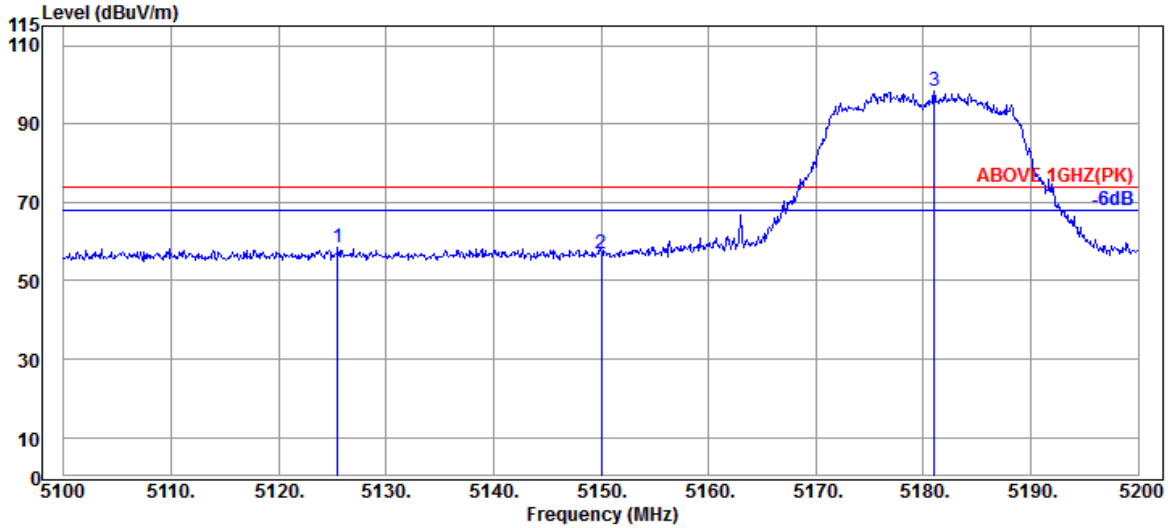

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.500	34.13	8.91	34.36	49.72	58.40	74.00	15.60	Peak
5150.000	34.20	8.92	34.35	48.15	56.92	74.00	17.08	Peak
@ 5181.000	34.20	8.95	34.34	89.47	98.28	---	---	Peak

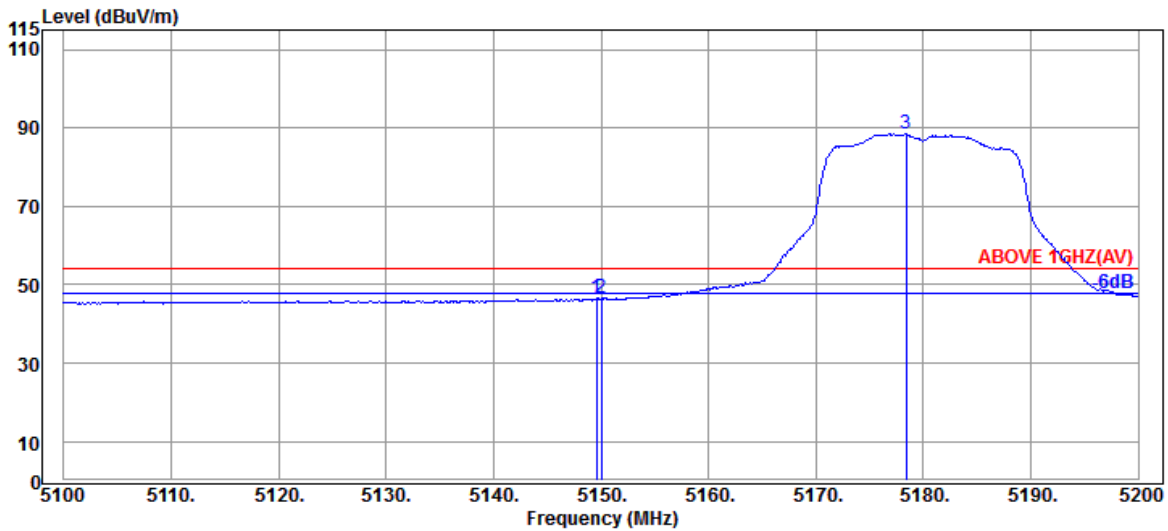


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	37.74	46.51	54.00	7.49	Average
5150.000	34.20	8.92	34.35	37.71	46.48	54.00	7.52	Average
@ 5178.400	34.20	8.95	34.34	79.63	88.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

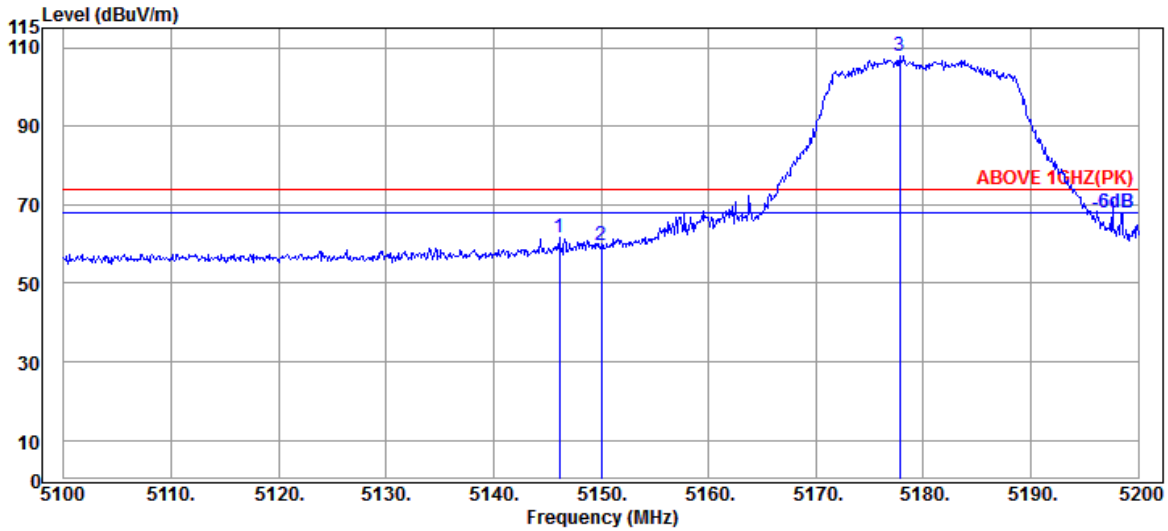

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	34.20	8.92	34.35	52.76	61.53	74.00	12.47	Peak
5150.000	34.20	8.92	34.35	51.02	59.79	74.00	14.21	Peak
@ 5177.800	34.20	8.95	34.34	99.15	107.96	---	---	Peak

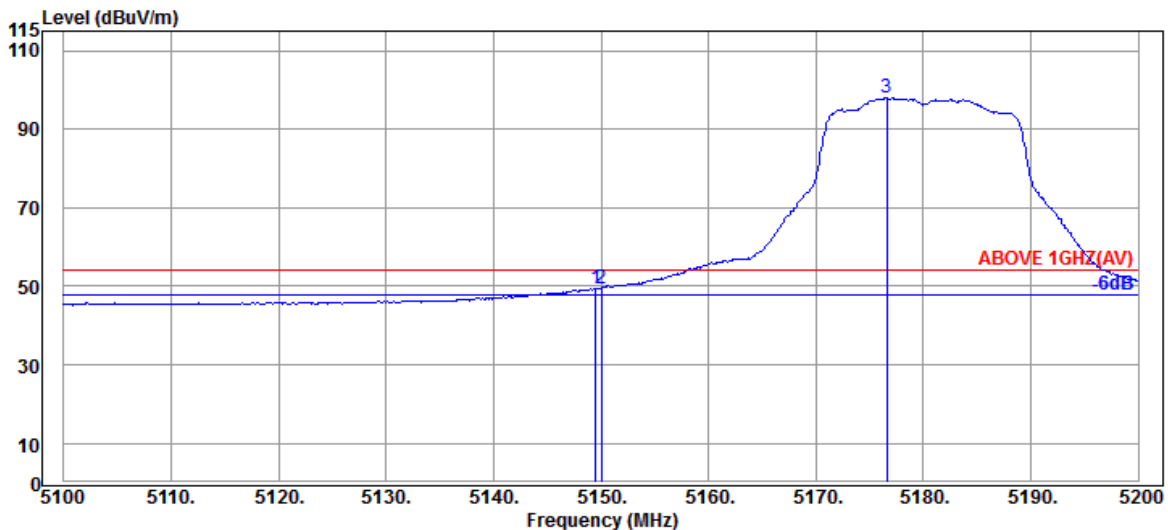


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	40.76	49.53	54.00	4.47	Average
5150.000	34.20	8.92	34.35	40.83	49.60	54.00	4.40	Average
@ 5176.600	34.20	8.95	34.34	89.14	97.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

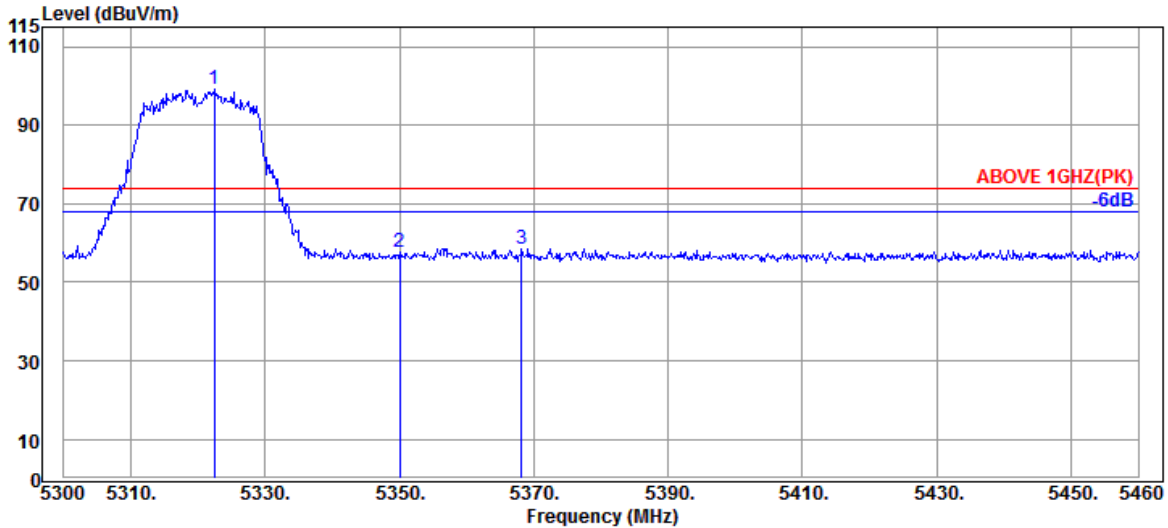

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.53	9.07	34.28	89.84	99.16	---	---	Peak
5350.080	34.60	9.10	34.27	48.33	57.76	74.00	16.24	Peak
5368.160	34.63	9.11	34.27	49.11	58.58	74.00	15.42	Peak

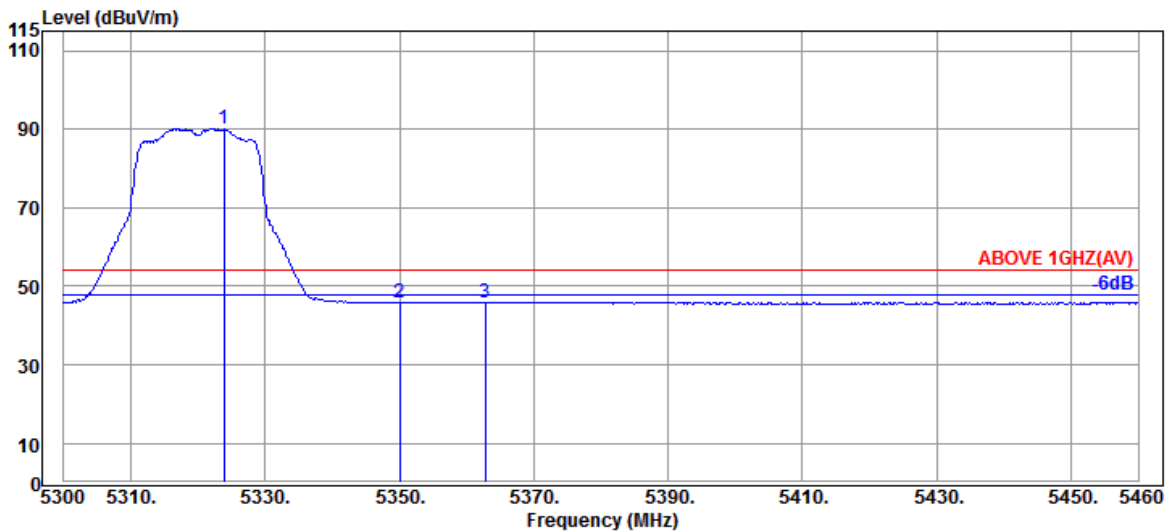


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.57	9.07	34.28	80.71	90.07	---	---	Average
5350.080	34.60	9.10	34.27	36.53	45.96	54.00	8.04	Average
5362.720	34.63	9.11	34.27	36.57	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

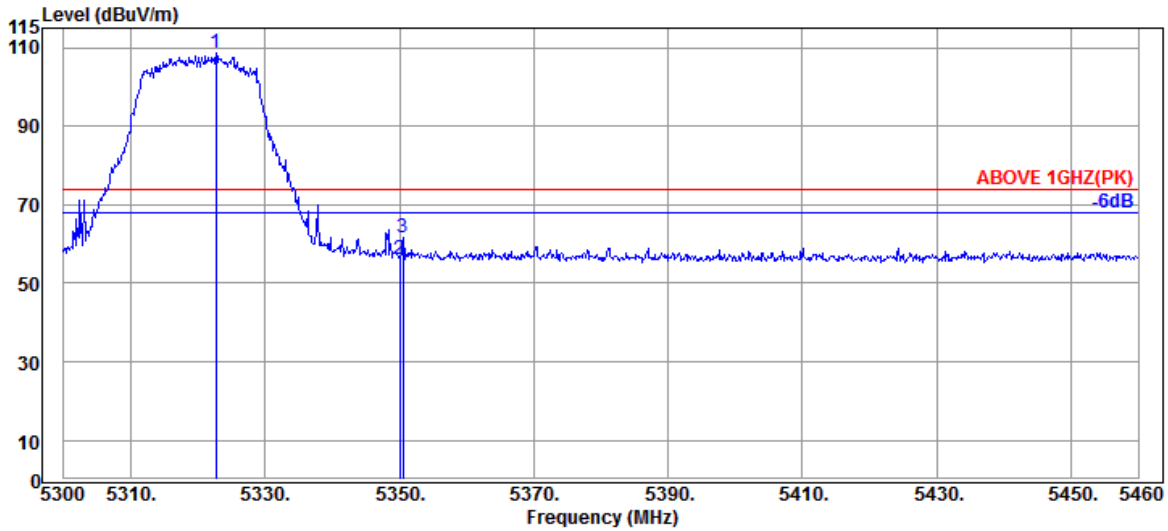

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	9.07	34.28	99.23	108.55	---	---	Peak
5350.080	34.60	9.10	34.27	46.69	56.12	74.00	17.88	Peak
5350.560	34.60	9.10	34.27	52.09	61.52	74.00	12.48	Peak

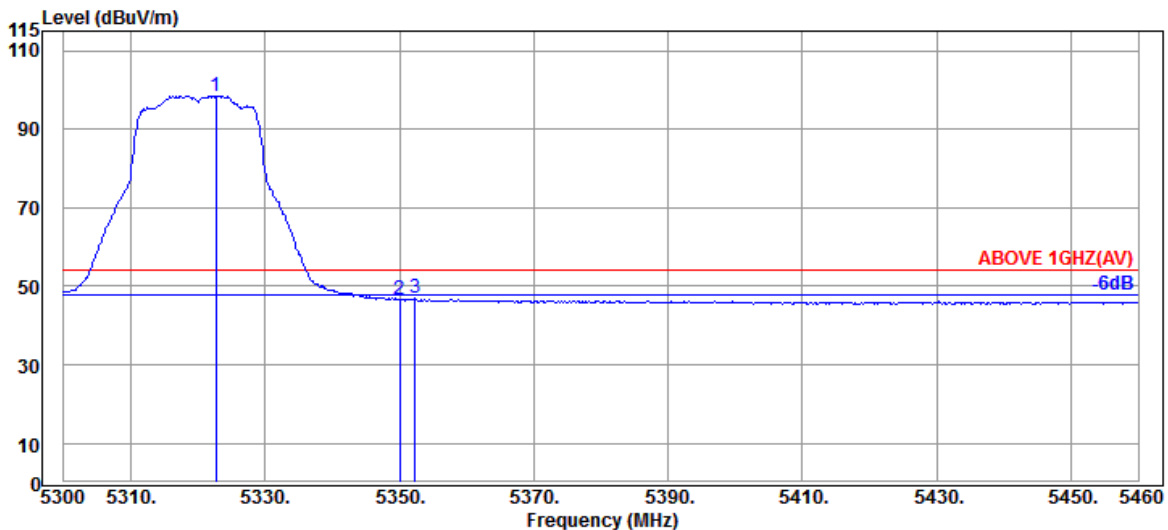


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	9.07	34.28	89.15	98.47	---	---	Average
5350.080	34.60	9.10	34.27	37.19	46.62	54.00	7.38	Average
5352.320	34.60	9.10	34.27	37.51	46.94	54.00	7.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

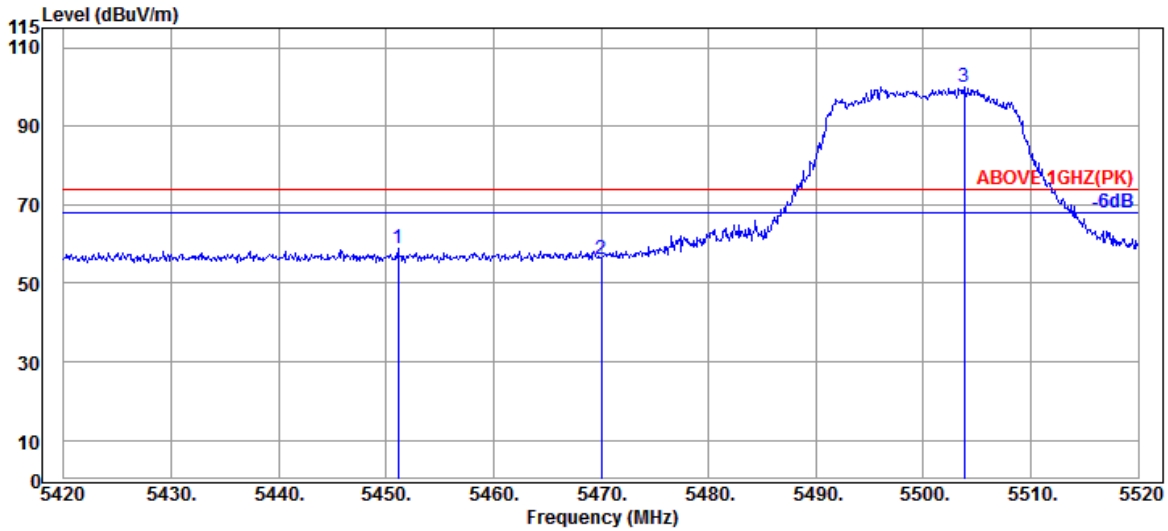

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.100	34.50	9.18	34.24	49.32	58.76	74.00	15.24	Peak
5470.000	34.47	9.20	34.24	46.58	56.01	74.00	17.99	Peak
@ 5503.800	34.40	9.23	34.24	90.63	100.02	---	---	Peak

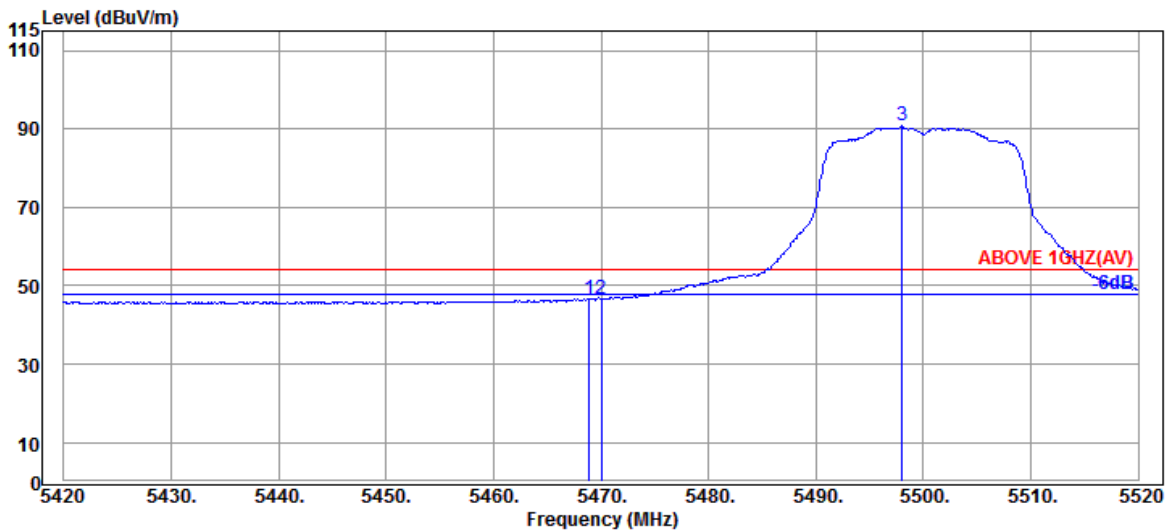


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	37.34	46.77	54.00	7.23	Average
5470.000	34.47	9.20	34.24	37.11	46.54	54.00	7.46	Average
@ 5498.000	34.40	9.23	34.23	81.37	90.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

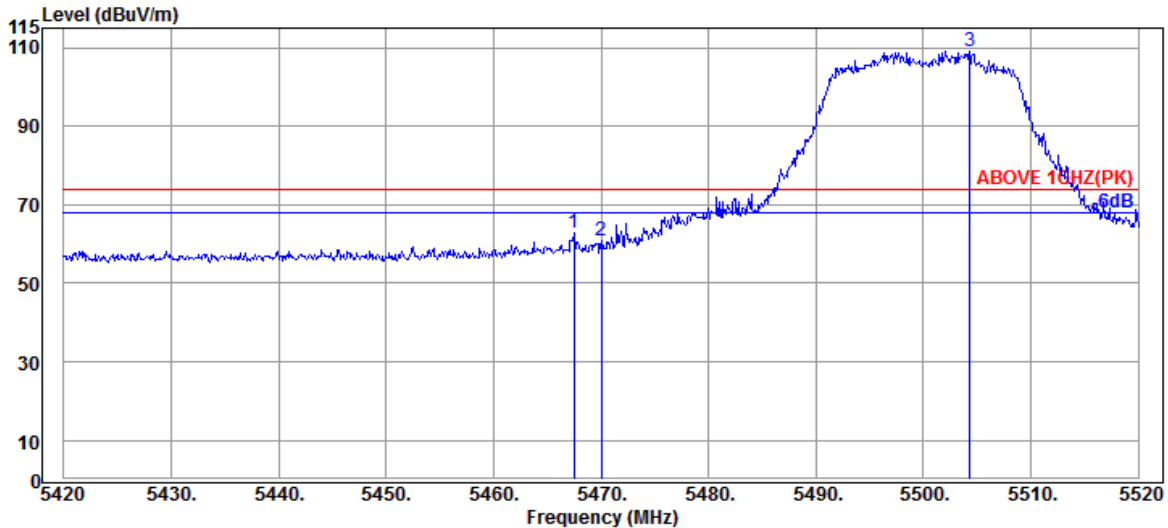

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	9.20	34.24	53.47	62.90	74.00	11.10	Peak
5470.000	34.47	9.20	34.24	51.56	60.99	74.00	13.01	Peak
@ 5504.300	34.40	9.23	34.24	99.61	109.00	---	---	Peak

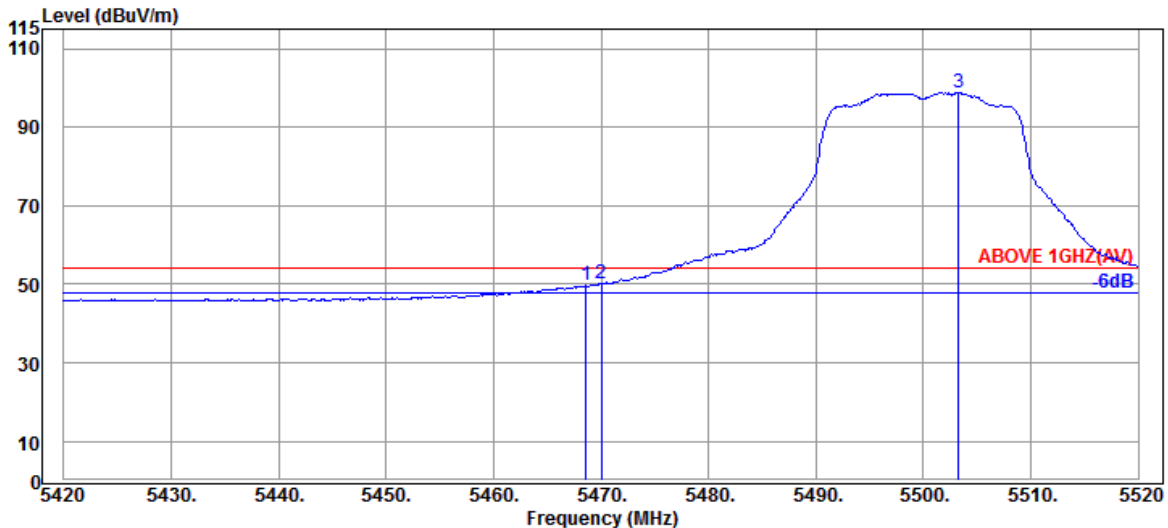


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.47	9.20	34.24	40.33	49.76	54.00	4.24	Average
5470.000	34.47	9.20	34.24	40.81	50.24	54.00	3.76	Average
@ 5503.300	34.40	9.23	34.24	89.39	98.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

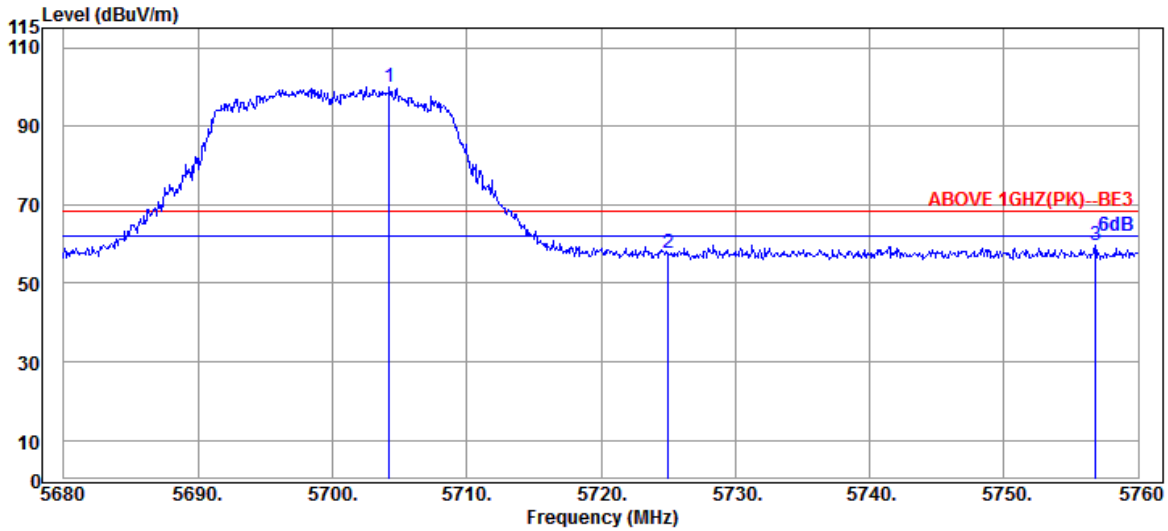

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.240	34.40	9.40	34.31	90.52	100.01	---	---	Peak
5725.040	34.67	9.42	34.32	47.83	57.60	68.20	10.60	Peak
5756.800	34.87	9.45	34.35	49.88	59.85	68.20	8.35	Peak

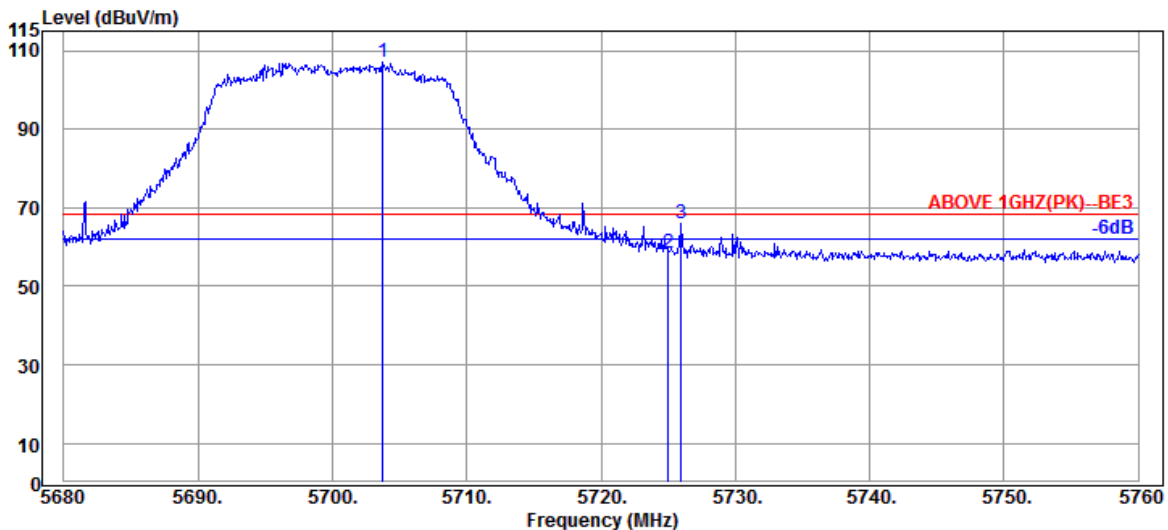


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.760	34.40	9.40	34.31	97.71	107.20	---	---	Peak
5725.040	34.67	9.42	34.32	48.82	58.59	68.20	9.61	Peak
5726.000	34.67	9.42	34.32	56.22	65.99	68.20	2.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

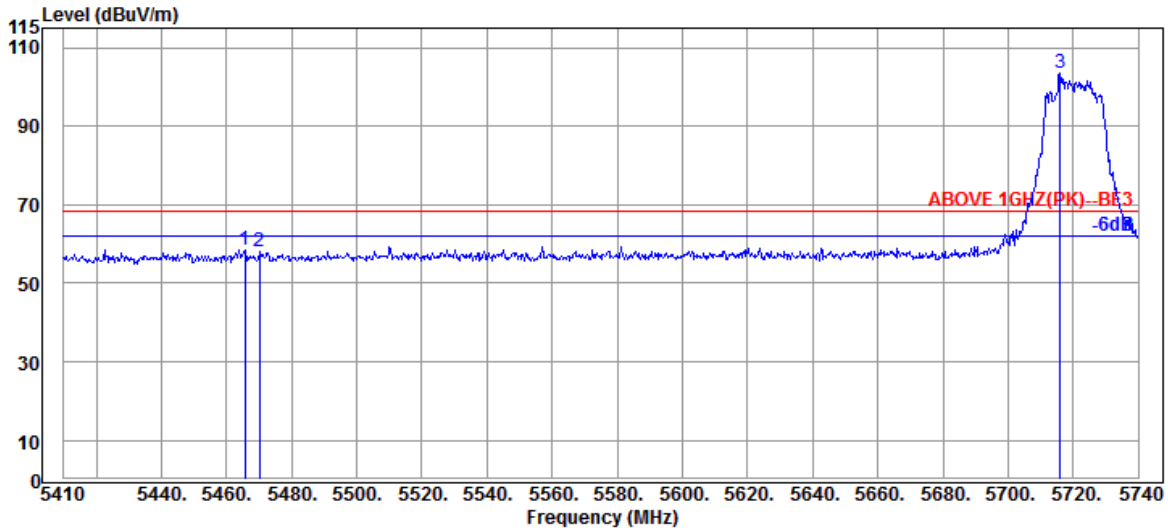

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.770	34.47	9.20	34.24	49.01	58.44	68.20	9.76	Peak
5470.060	34.47	9.20	34.24	48.67	58.10	68.20	10.10	Peak
@ 5715.910	34.53	9.40	34.32	93.77	103.38	---	---	Peak

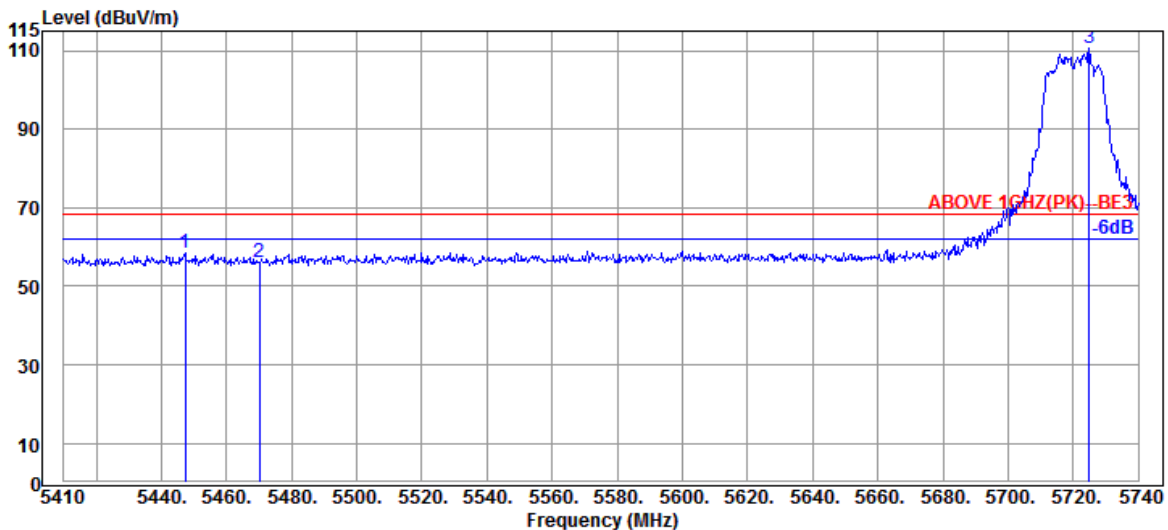


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.290	34.55	9.18	34.25	48.86	58.34	68.20	9.86	Peak
5470.060	34.47	9.20	34.24	46.62	56.05	68.20	12.15	Peak
@ 5724.820	34.67	9.42	34.32	101.02	110.79	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

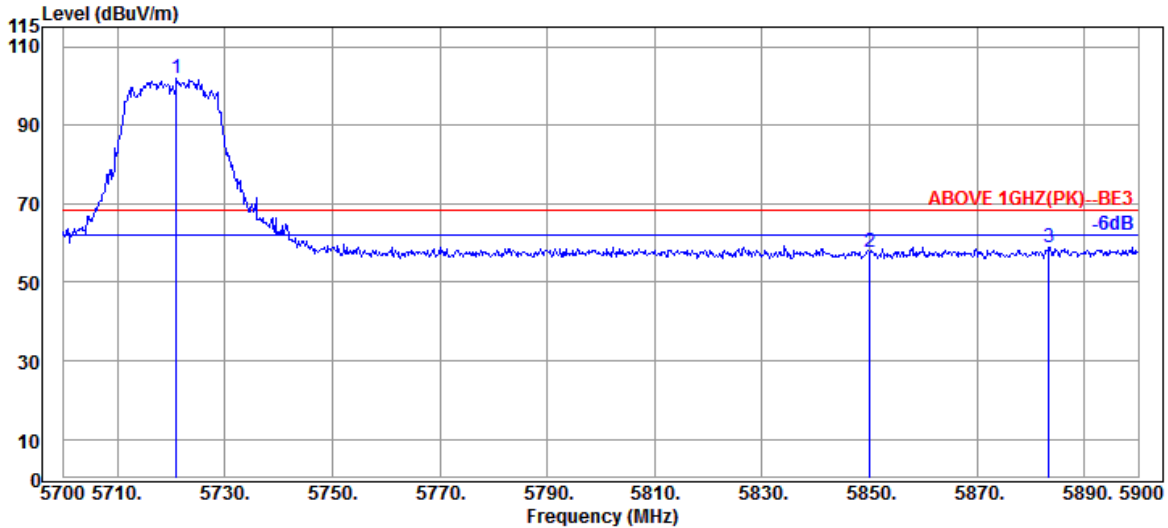

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.000	34.53	9.42	34.32	92.20	101.83	---	---	Peak
5850.000	35.10	9.52	34.38	47.51	57.75	68.20	10.45	Peak
5883.400	35.30	9.55	34.40	48.60	59.05	68.20	9.15	Peak

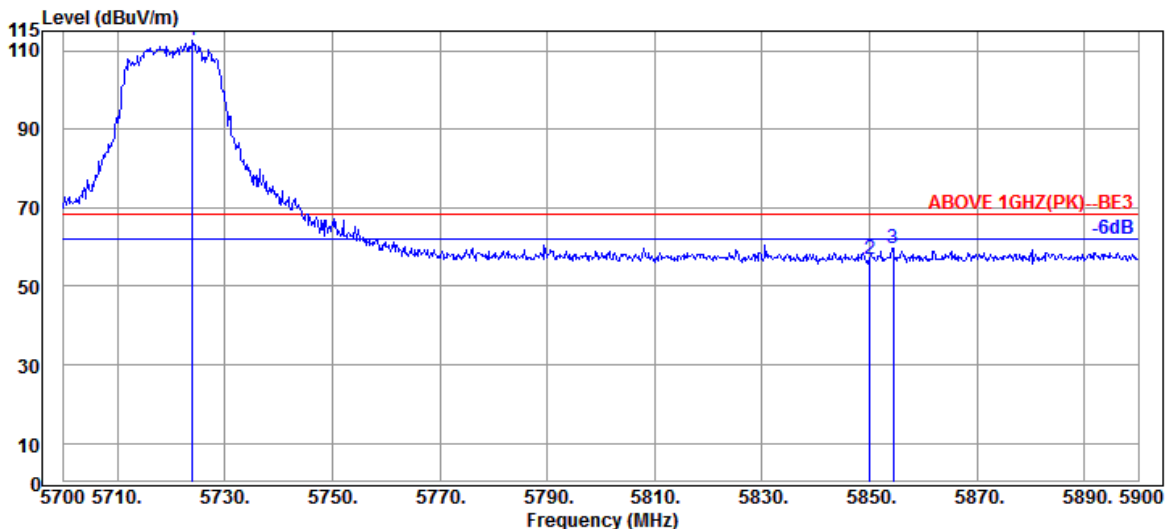


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.67	9.42	34.32	102.71	112.48	---	---	Peak
5850.000	35.10	9.52	34.38	46.75	56.99	68.20	11.21	Peak
5854.400	35.10	9.53	34.38	49.28	59.53	68.20	8.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

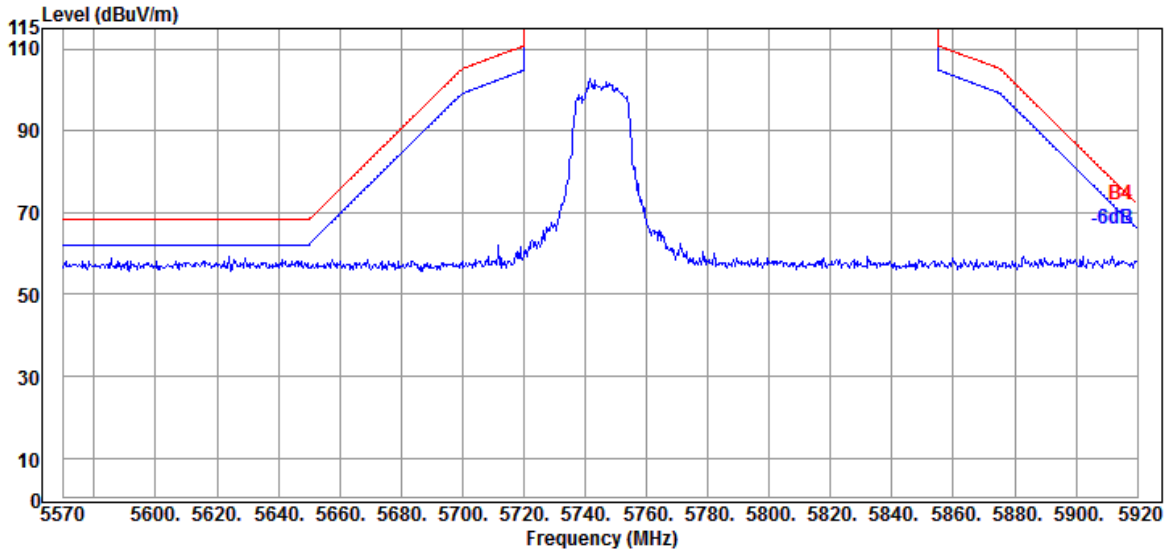


Antenna at Vertical Polarization

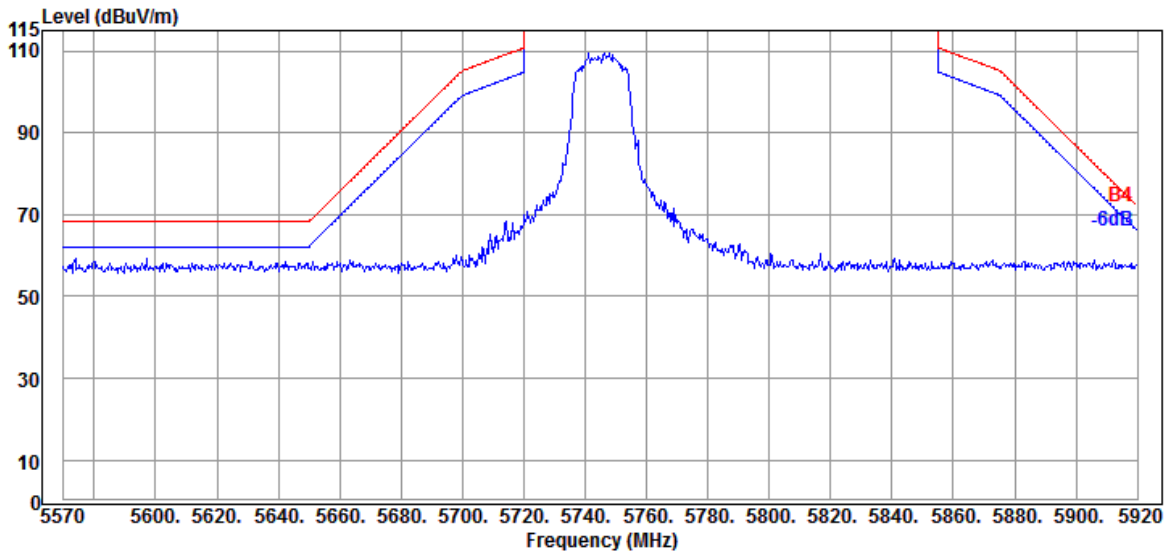


Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

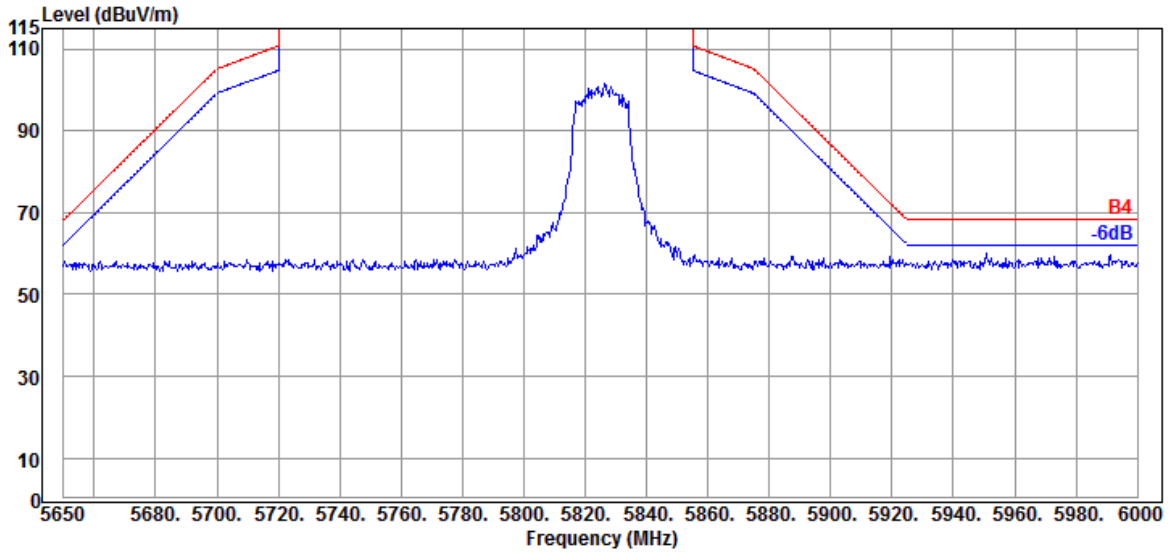

Antenna at Vertical Polarization

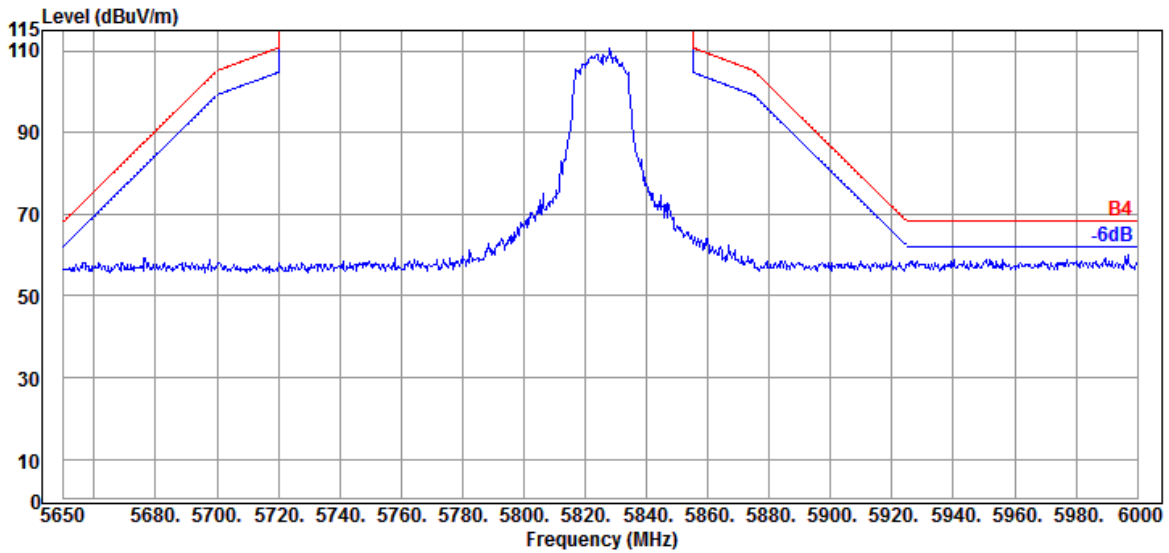


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

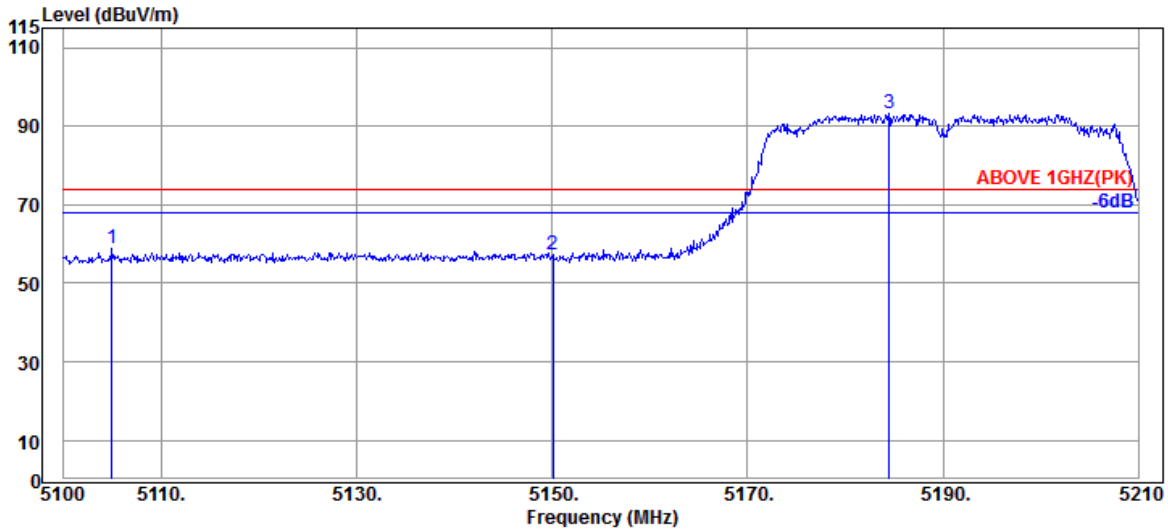

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.950	34.10	8.88	34.36	50.18	58.80	74.00	15.20	Peak
5150.050	34.20	8.92	34.35	48.51	57.28	74.00	16.72	Peak
@ 5184.480	34.20	8.95	34.34	84.27	93.08	---	---	Peak

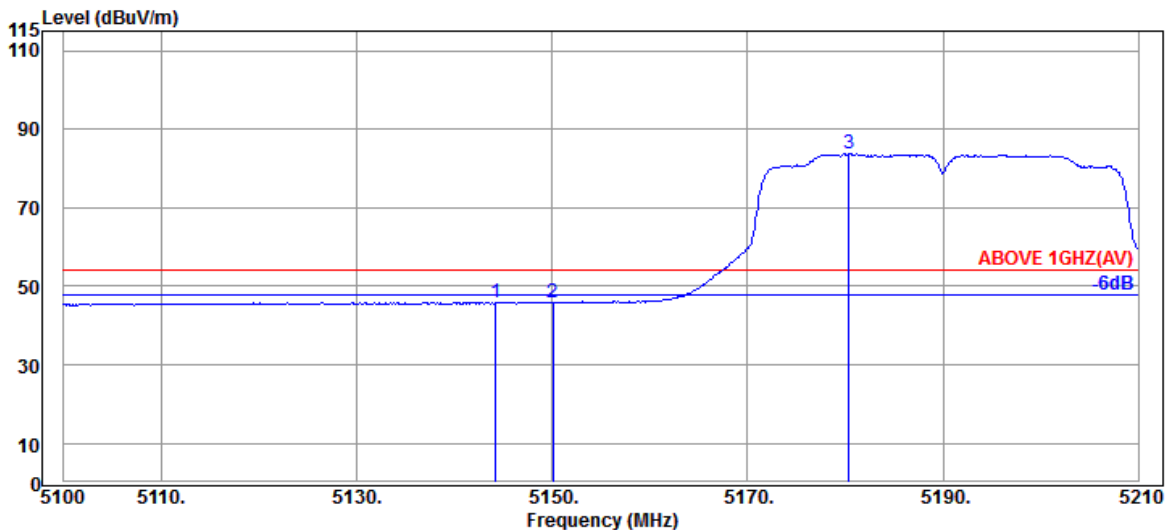


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.220	34.20	8.92	34.35	37.17	45.94	54.00	8.06	Average
5150.050	34.20	8.92	34.35	37.00	45.77	54.00	8.23	Average
@ 5184.480	34.20	8.95	34.34	74.96	83.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

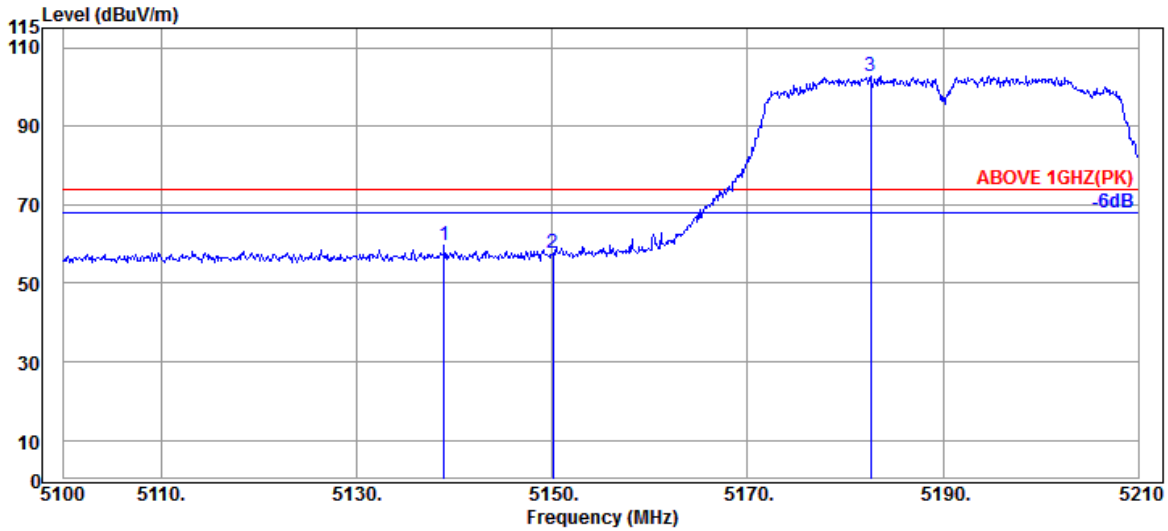

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.940	34.17	8.91	34.36	50.91	59.63	74.00	14.37	Peak
5150.050	34.20	8.92	34.35	48.76	57.53	74.00	16.47	Peak
@ 5182.610	34.20	8.95	34.34	93.91	102.72	---	---	Peak

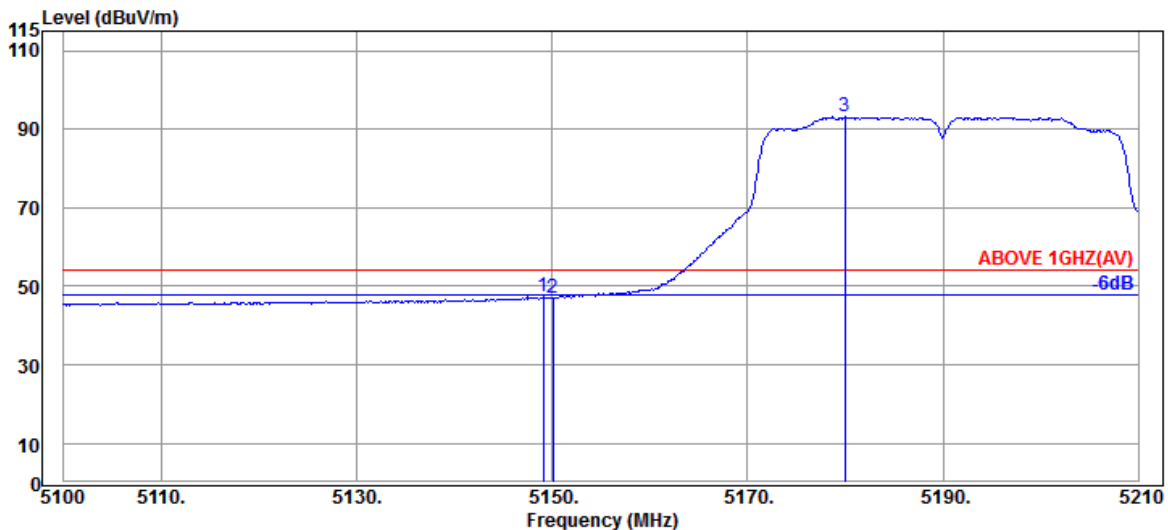


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	34.35	38.57	47.34	54.00	6.66	Average
5150.050	34.20	8.92	34.35	38.30	47.07	54.00	6.93	Average
@ 5179.970	34.20	8.95	34.34	84.35	93.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

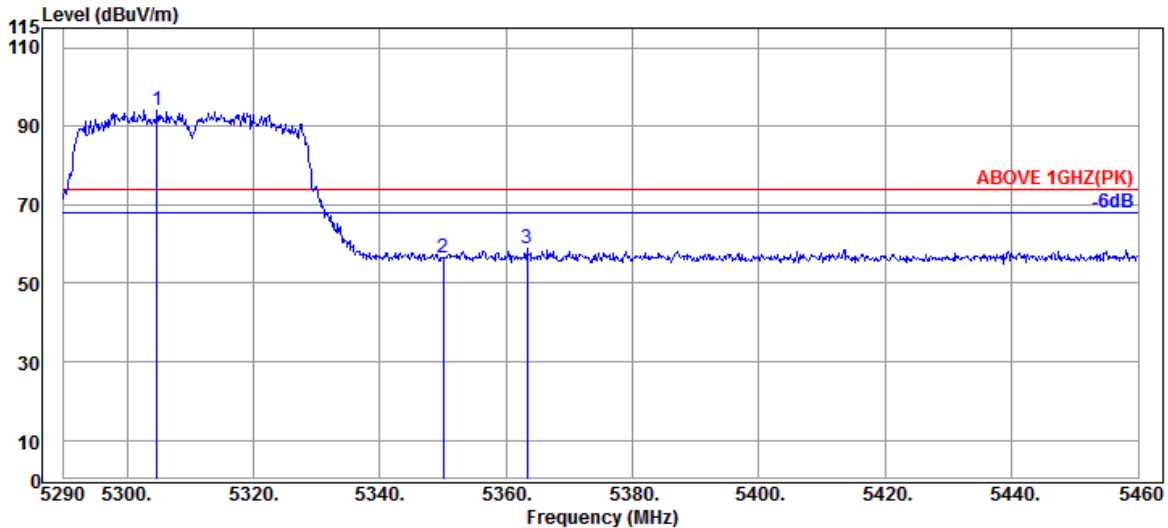

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.790	34.50	9.05	34.29	84.78	94.04	---	---	Peak
5350.010	34.60	9.10	34.27	46.98	56.41	74.00	17.59	Peak
5363.270	34.63	9.11	34.27	49.28	58.75	74.00	15.25	Peak

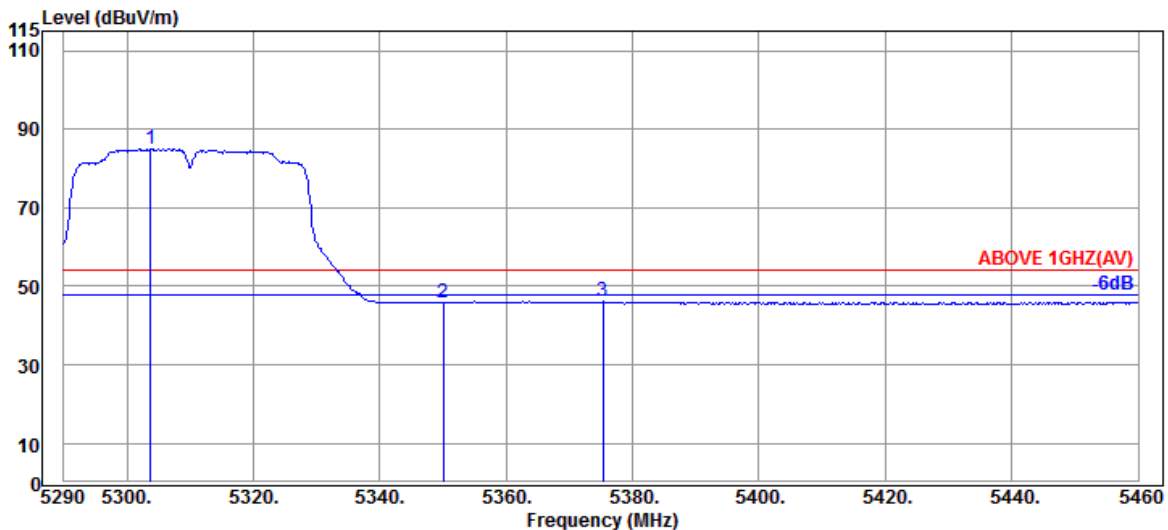


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.770	34.50	9.05	34.29	75.67	84.93	---	---	Average
5350.010	34.60	9.10	34.27	36.46	45.89	54.00	8.11	Average
5375.340	34.67	9.11	34.27	36.59	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

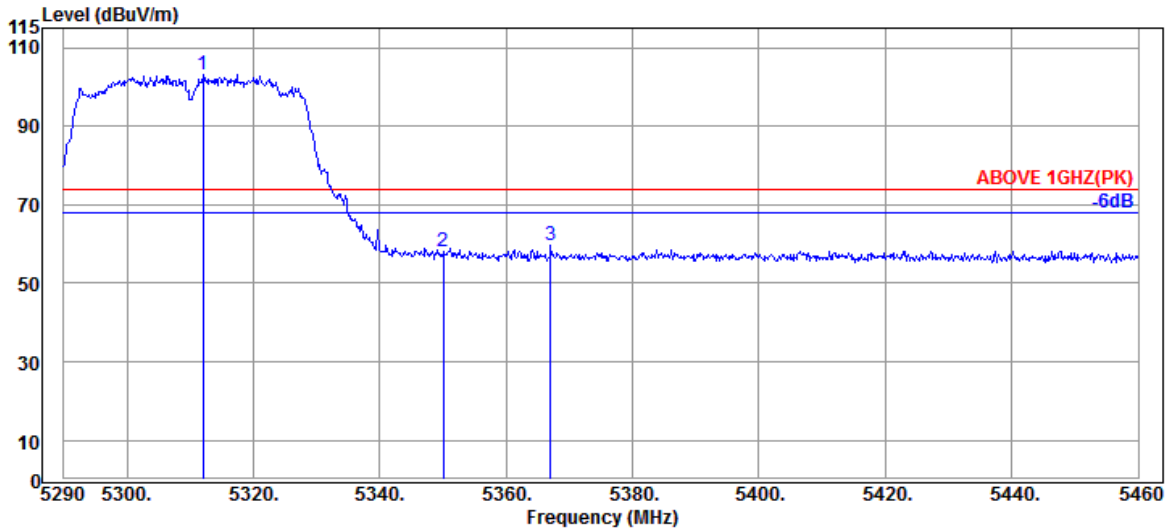

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.100	34.53	9.07	34.29	93.69	103.00	---	---	Peak
5350.010	34.60	9.10	34.27	48.77	58.20	74.00	15.80	Peak
5367.010	34.63	9.11	34.27	50.18	59.65	74.00	14.35	Peak

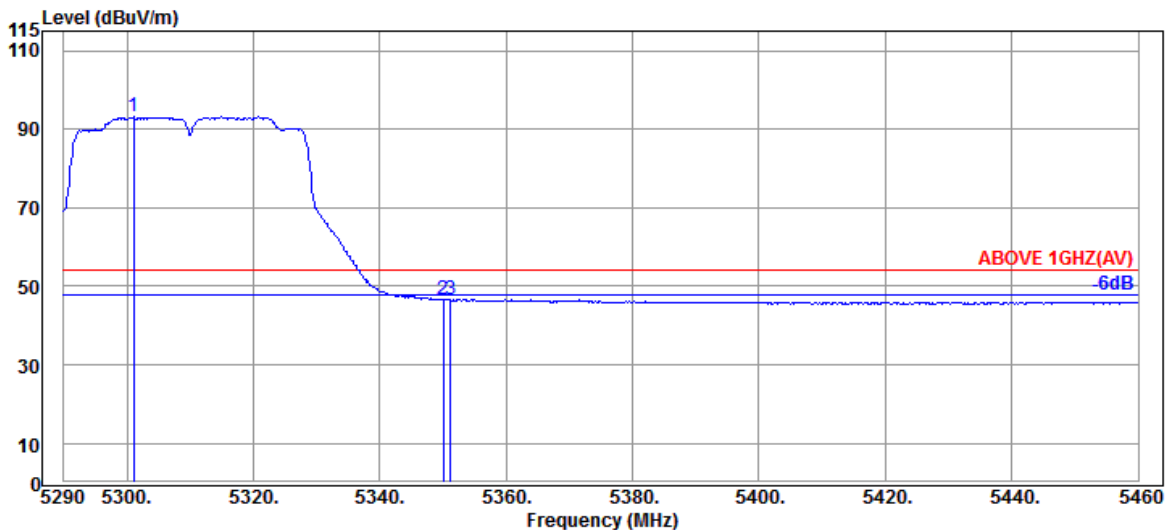


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.050	34.50	9.05	34.29	83.87	93.13	---	---	Average
5350.010	34.60	9.10	34.27	37.06	46.49	54.00	7.51	Average
5351.200	34.60	9.10	34.27	37.33	46.76	54.00	7.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

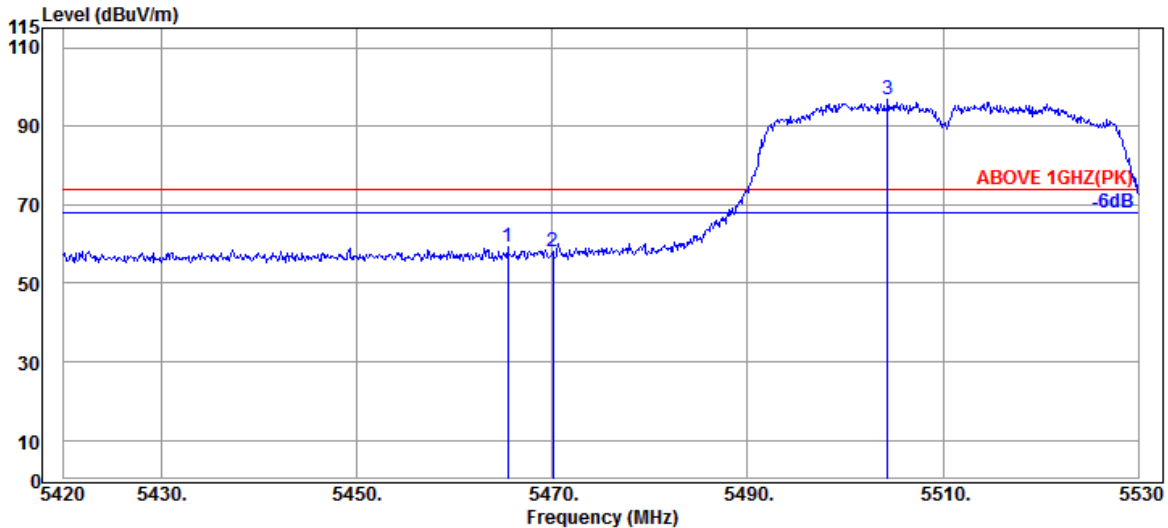

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.430	34.47	9.20	34.24	49.75	59.18	74.00	14.82	Peak
5470.050	34.47	9.20	34.24	48.85	58.28	74.00	15.72	Peak
@ 5504.370	34.40	9.23	34.24	87.43	96.82	---	---	Peak

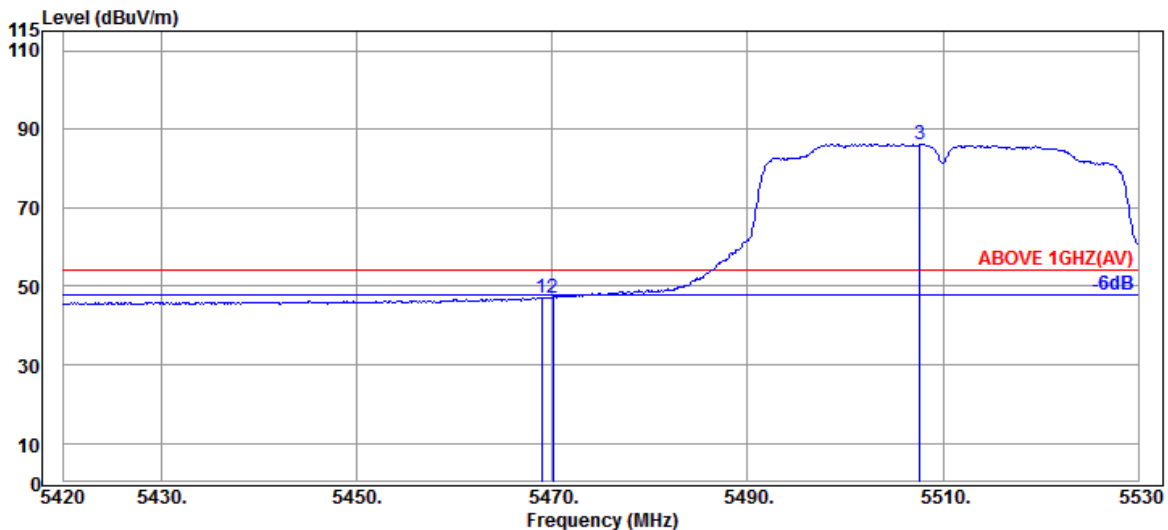


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	9.20	34.24	37.65	47.08	54.00	6.92	Average
5470.050	34.47	9.20	34.24	37.49	46.92	54.00	7.08	Average
@ 5507.670	34.40	9.23	34.24	76.78	86.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

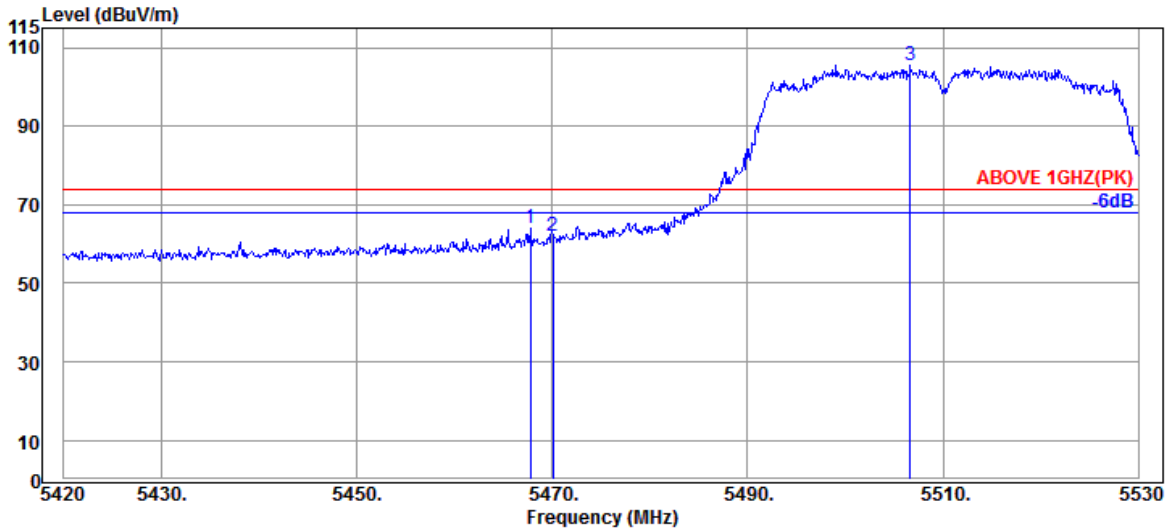

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.740	34.47	9.20	34.24	54.53	63.96	74.00	10.04	Peak
5470.050	34.47	9.20	34.24	52.77	62.20	74.00	11.80	Peak
@ 5506.680	34.40	9.23	34.24	96.20	105.59	---	---	Peak

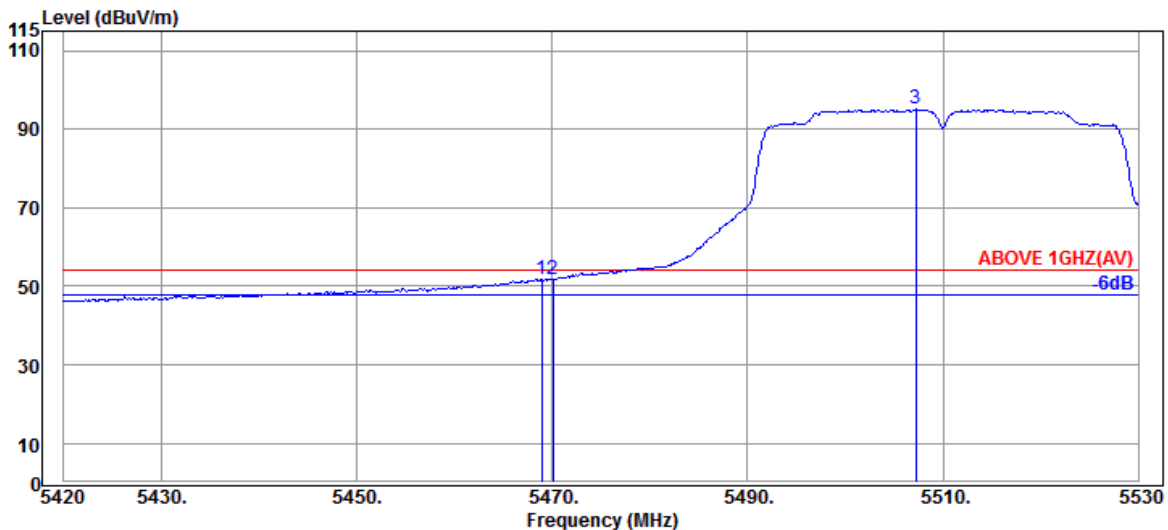


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	9.20	34.24	42.21	51.64	54.00	2.36	Average
5470.050	34.47	9.20	34.24	42.30	51.73	54.00	2.27	Average
@ 5507.230	34.40	9.23	34.24	85.68	95.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

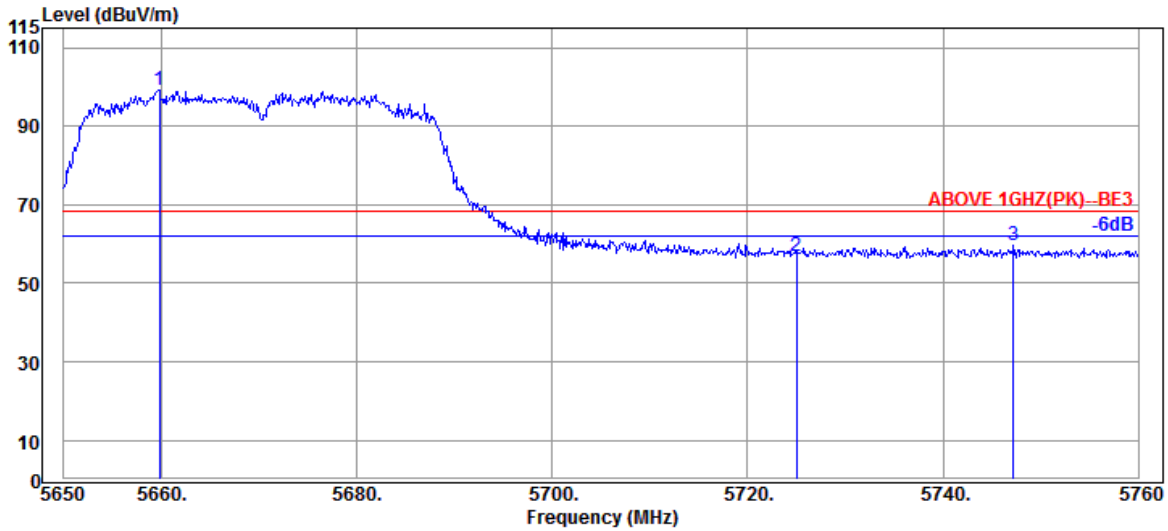

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.790	34.40	9.36	34.30	89.93	99.39	---	---	Peak
5725.020	34.67	9.42	34.32	46.99	56.76	68.20	11.44	Peak
5747.240	34.80	9.43	34.33	49.69	59.59	68.20	8.61	Peak

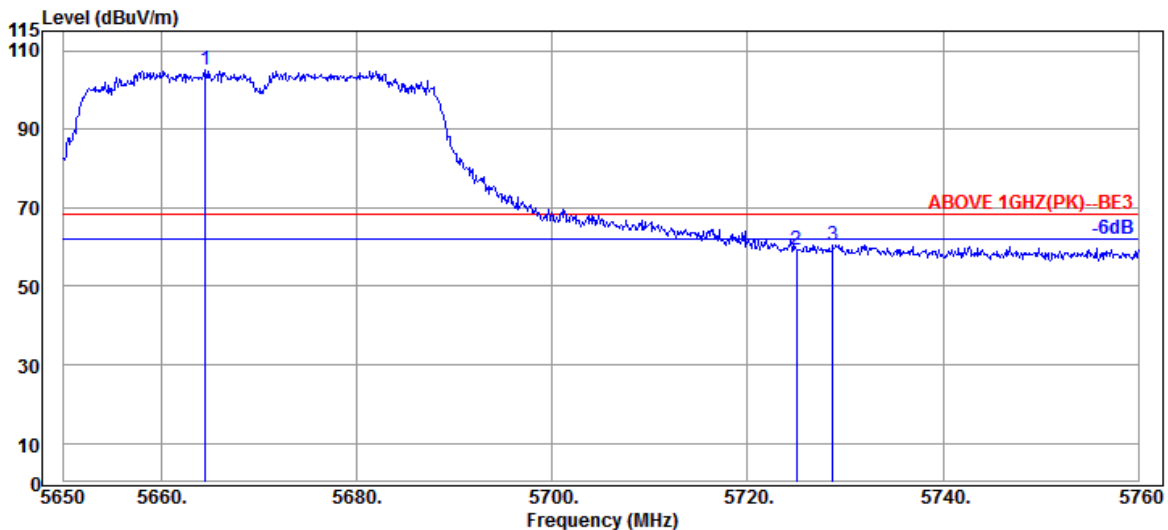


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.520	34.40	9.36	34.30	95.73	105.19	---	---	Peak
5725.020	34.67	9.42	34.32	49.40	59.17	68.20	9.03	Peak
5728.760	34.67	9.42	34.32	50.86	60.63	68.20	7.57	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

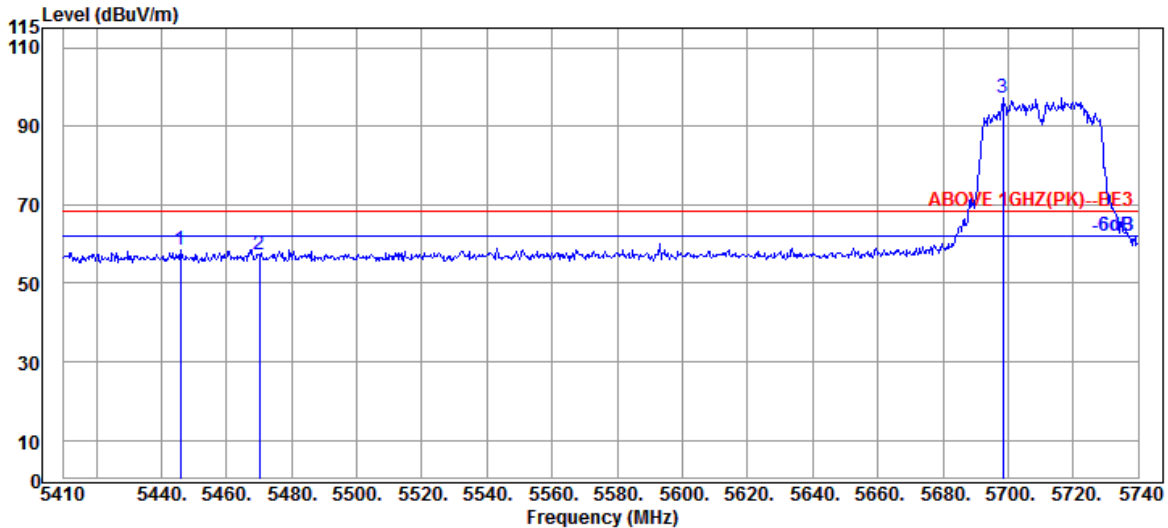

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.970	34.55	9.18	34.25	49.14	58.62	68.20	9.58	Peak
5470.060	34.47	9.20	34.24	47.67	57.10	68.20	11.10	Peak
@ 5698.420	34.40	9.39	34.31	87.78	97.26	---	---	Peak

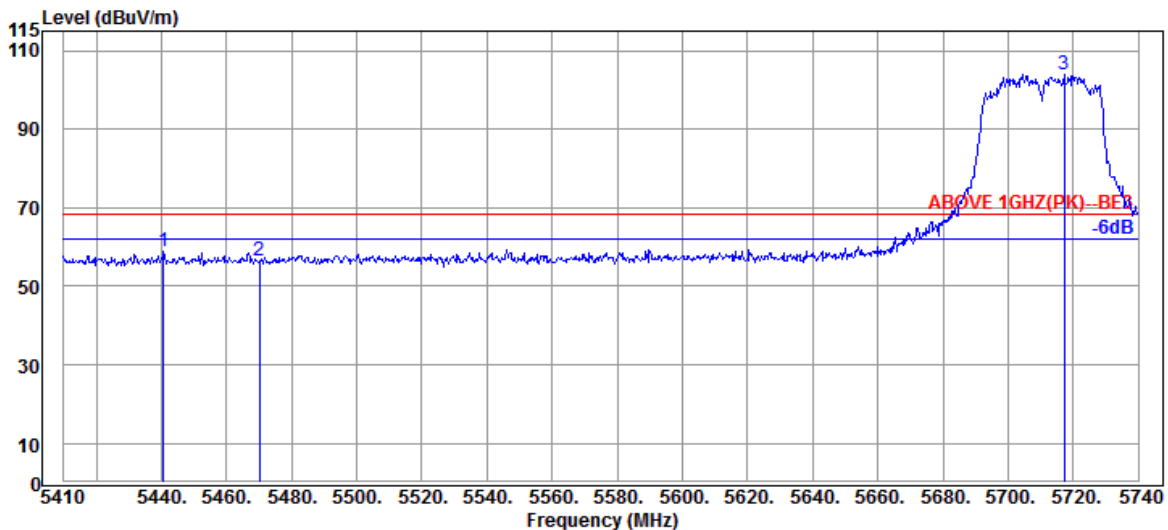


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.690	34.55	9.17	34.25	49.53	59.00	68.20	9.20	Peak
5470.060	34.47	9.20	34.24	46.95	56.38	68.20	11.82	Peak
@ 5717.230	34.53	9.40	34.32	94.49	104.10	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

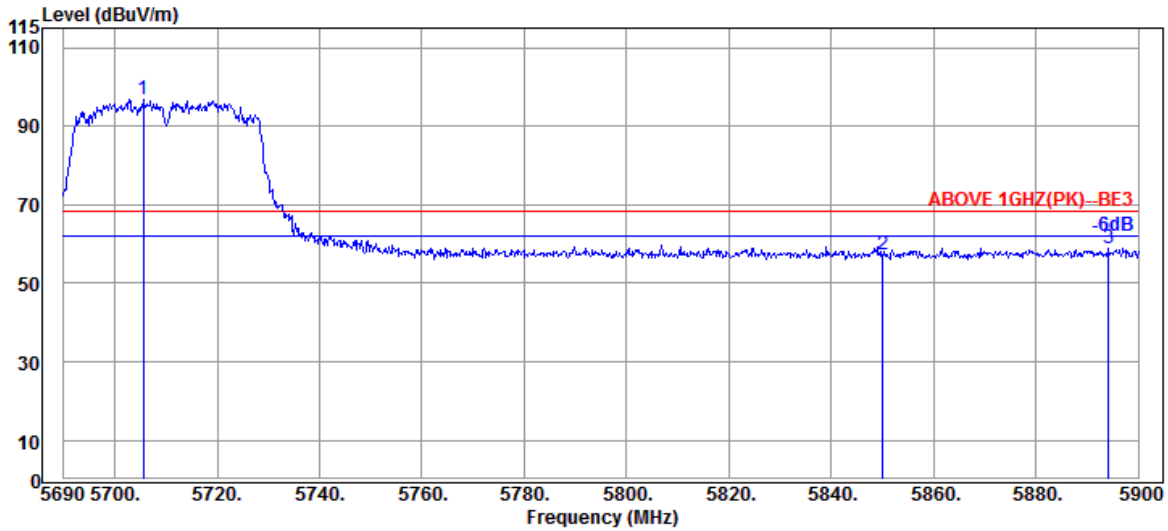

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.540	34.40	9.40	34.32	87.51	96.99	---	---	Peak
5850.020	35.10	9.52	34.38	47.00	57.24	68.20	10.96	Peak
5894.120	35.40	9.56	34.40	48.49	59.05	68.20	9.15	Peak

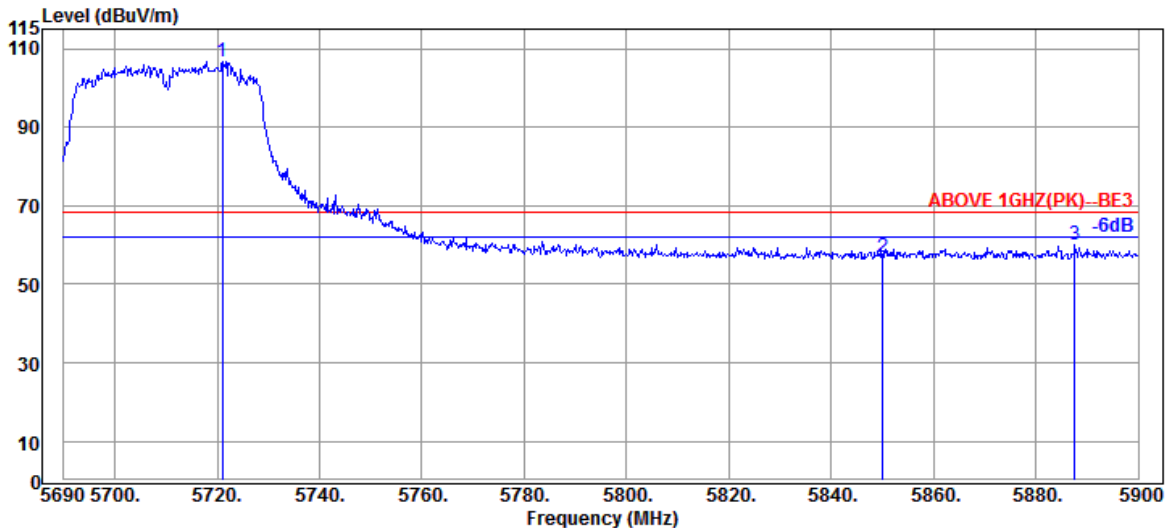


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.080	34.53	9.42	34.32	97.23	106.86	---	---	Peak
5850.020	35.10	9.52	34.38	46.70	56.94	68.20	11.26	Peak
5887.610	35.30	9.56	34.40	49.46	59.92	68.20	8.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

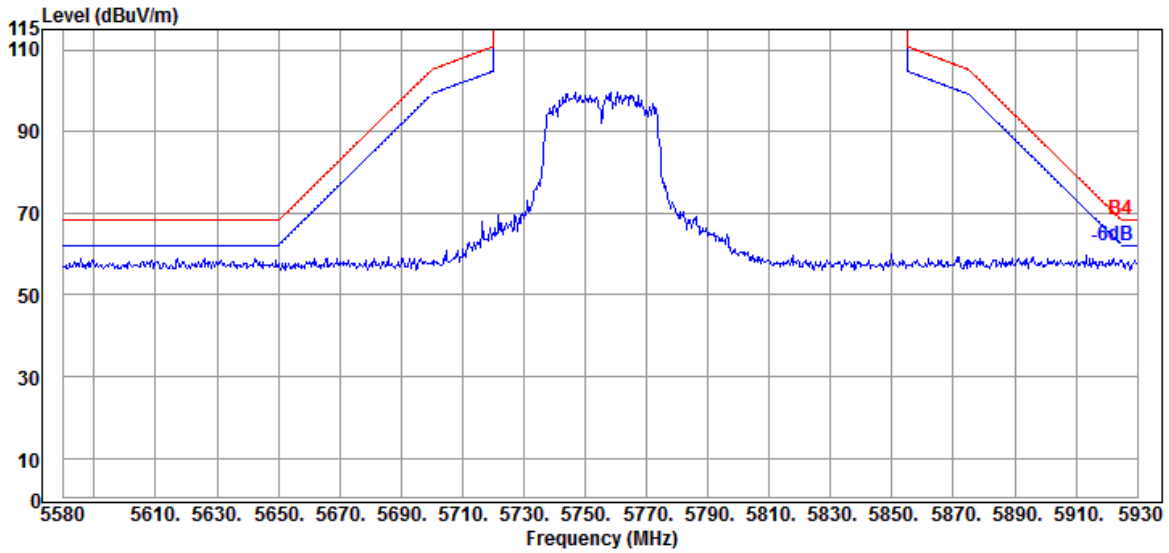


Antenna at Vertical Polarization

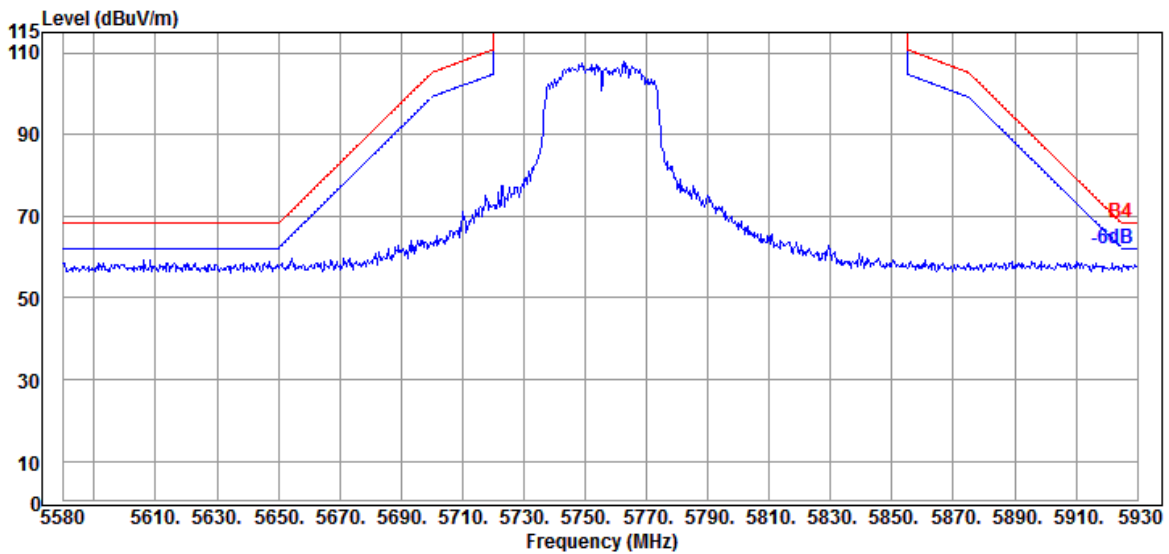


Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

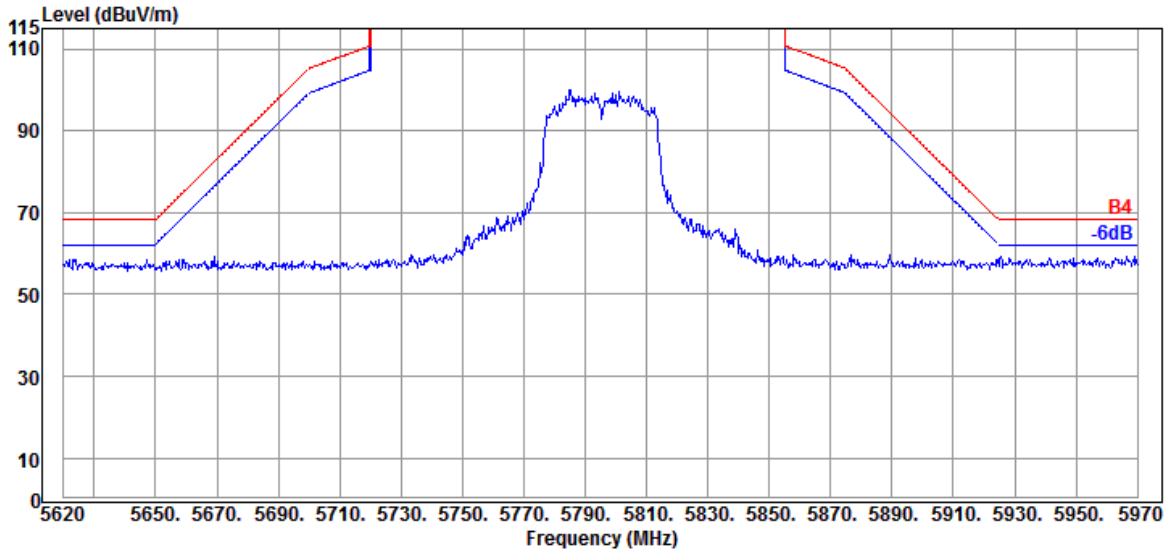

Antenna at Vertical Polarization

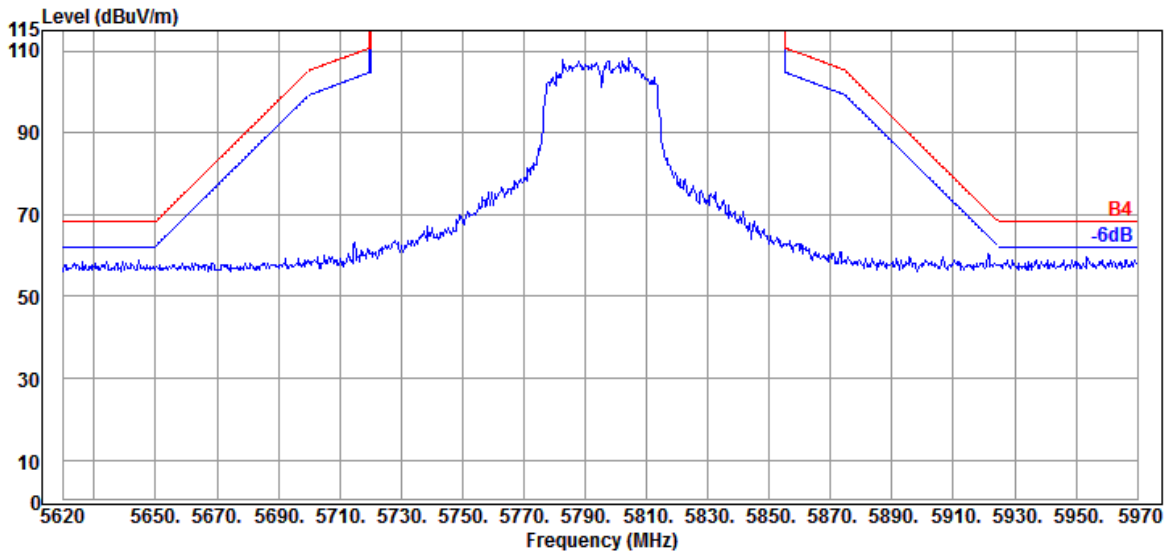


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

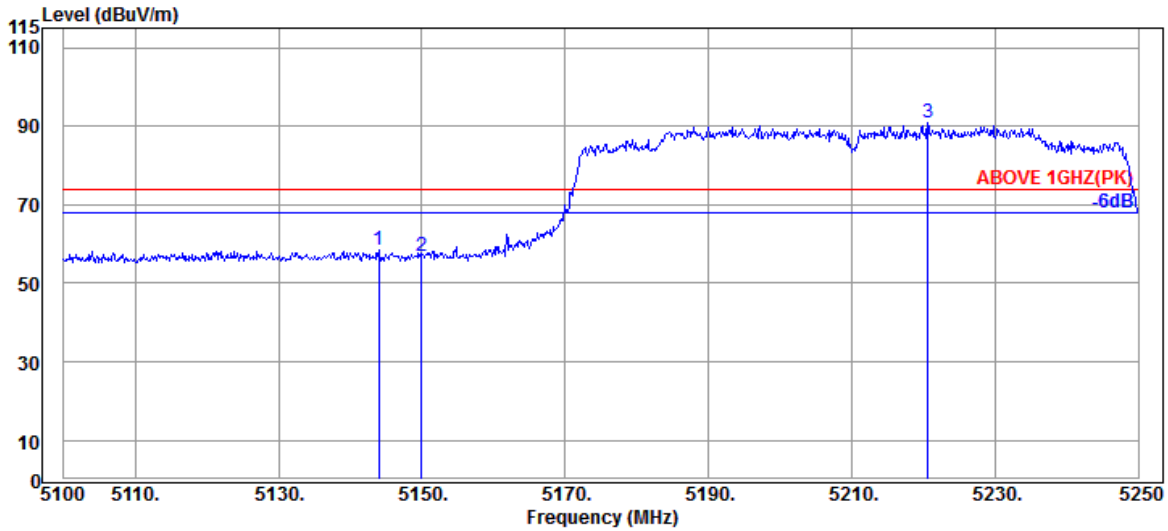

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.950	34.20	8.92	34.35	49.56	58.33	74.00	15.67	Peak
5149.950	34.20	8.92	34.35	48.13	56.90	74.00	17.10	Peak
@ 5220.600	34.30	8.98	34.32	81.95	90.91	---	---	Peak

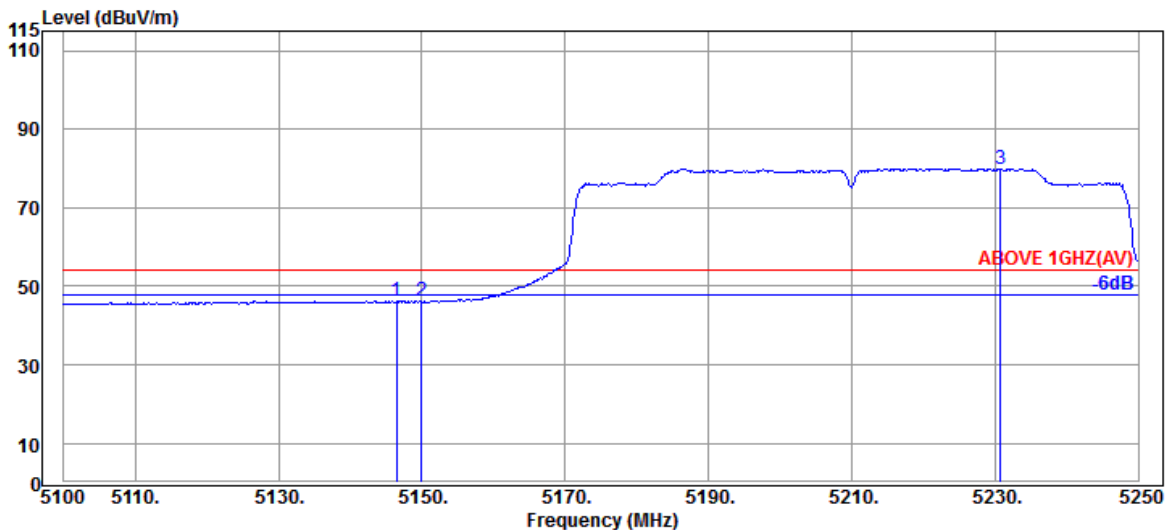


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.20	8.92	34.35	37.58	46.35	54.00	7.65	Average
5149.950	34.20	8.92	34.35	37.33	46.10	54.00	7.90	Average
@ 5230.800	34.30	8.99	34.32	70.98	79.95	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

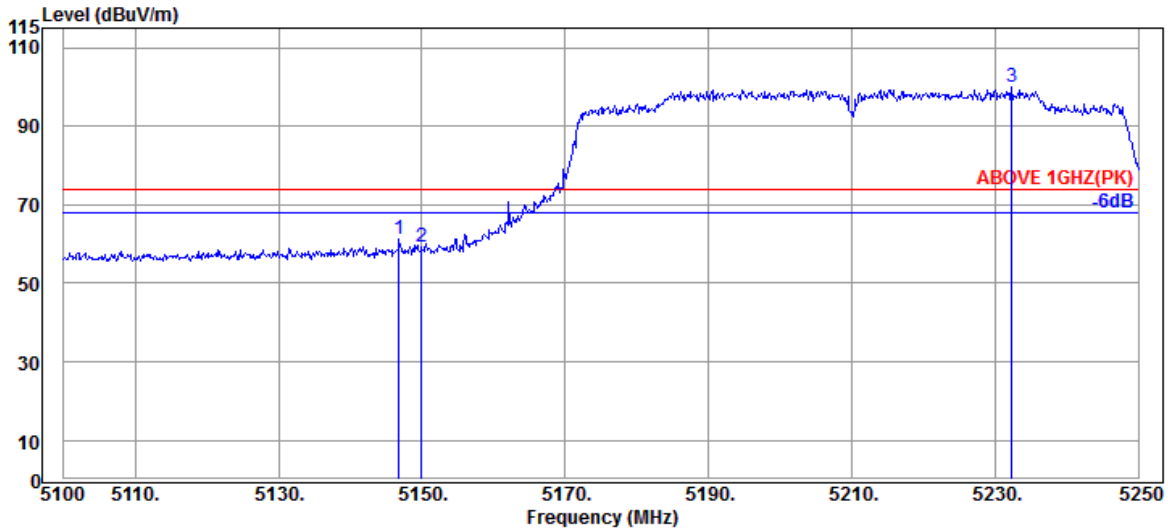

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	34.20	8.92	34.35	52.35	61.12	74.00	12.88	Peak
5149.950	34.20	8.92	34.35	50.47	59.24	74.00	14.76	Peak
@ 5232.300	34.35	8.99	34.32	90.78	99.80	---	---	Peak

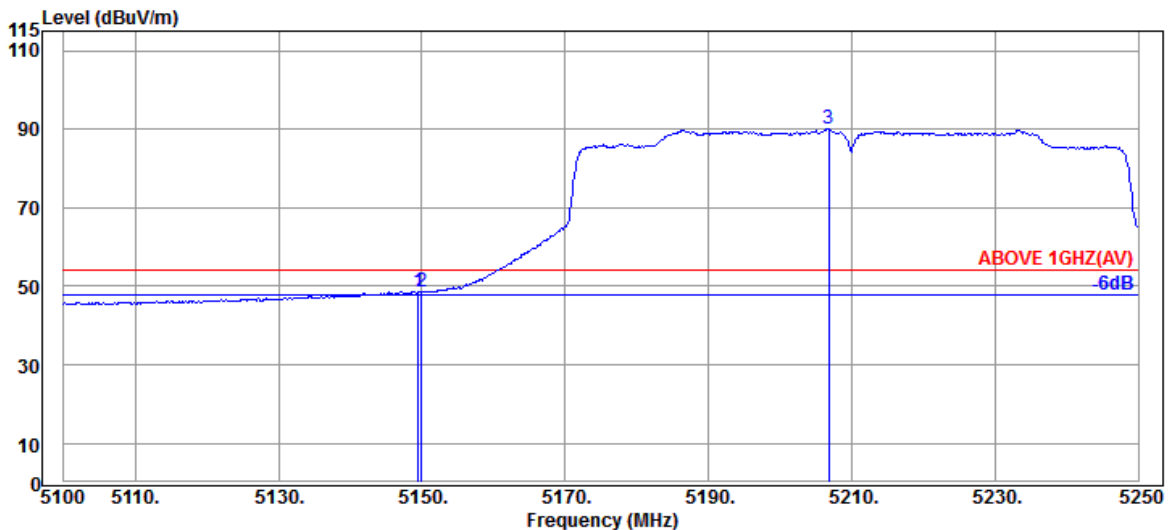


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	39.93	48.70	54.00	5.30	Average
5149.950	34.20	8.92	34.35	39.78	48.55	54.00	5.45	Average
@ 5206.800	34.25	8.96	34.33	81.26	90.14	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

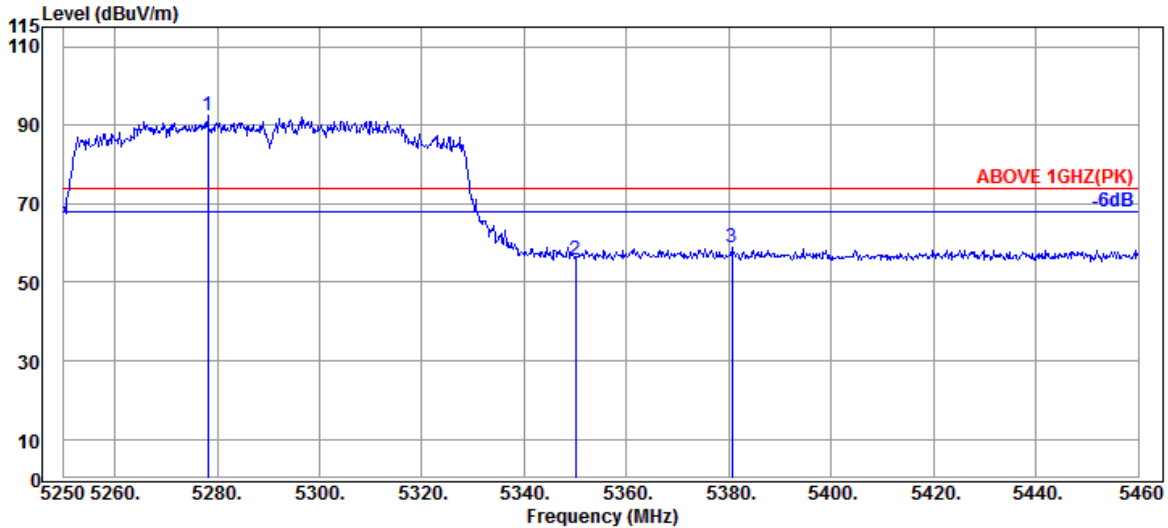

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.140	34.47	9.04	34.30	83.25	92.46	---	---	Peak
5349.960	34.60	9.10	34.27	46.34	55.77	74.00	18.23	Peak
5380.620	34.67	9.13	34.27	49.29	58.82	74.00	15.18	Peak

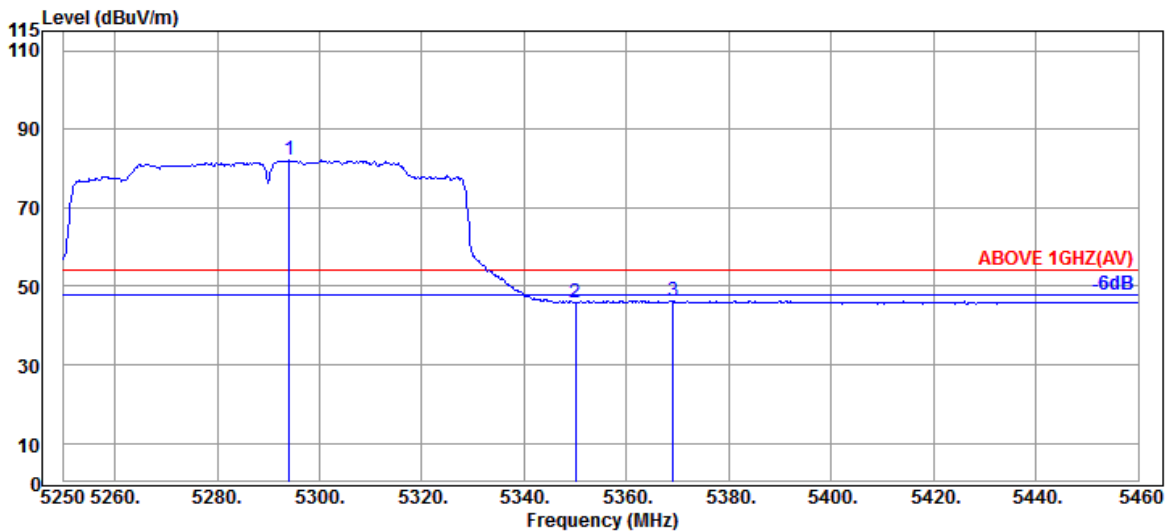


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.100	34.50	9.05	34.30	72.77	82.02	---	---	Average
5349.960	34.60	9.10	34.27	36.46	45.89	54.00	8.11	Average
5369.070	34.63	9.11	34.27	36.78	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

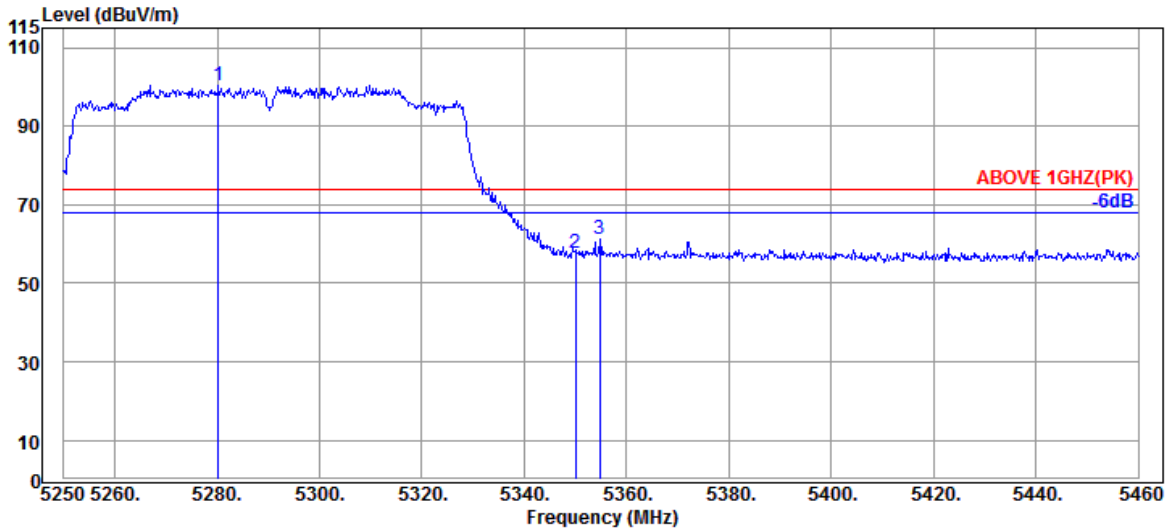

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5280.240	34.47	9.04	34.30	91.31	100.52	---	---	Peak
5349.960	34.60	9.10	34.27	48.34	57.77	74.00	16.23	Peak
5354.790	34.63	9.10	34.27	51.87	61.33	74.00	12.67	Peak

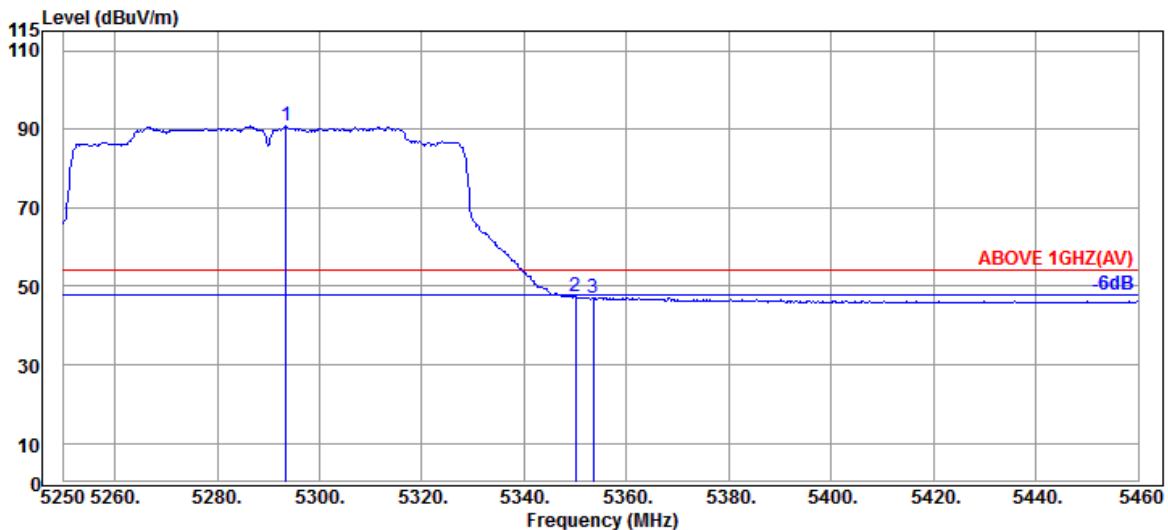


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.470	34.50	9.05	34.30	81.51	90.76	---	---	Average
5349.960	34.60	9.10	34.27	37.91	47.34	54.00	6.66	Average
5353.530	34.60	9.10	34.27	37.68	47.11	54.00	6.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

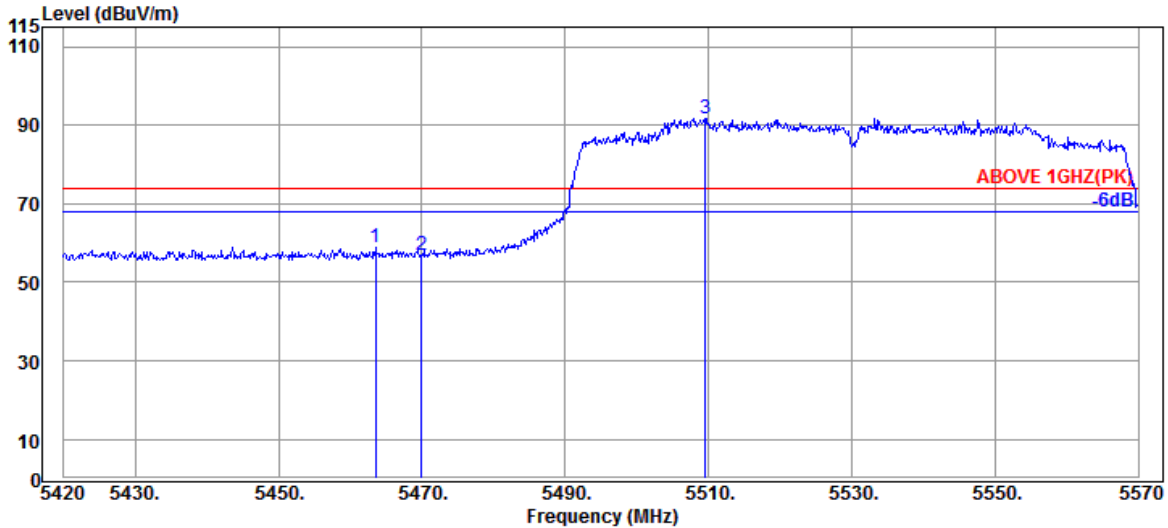

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.50	9.20	34.24	49.31	58.77	74.00	15.23	Peak
5469.950	34.47	9.20	34.24	47.45	56.88	74.00	17.12	Peak
@ 5509.550	34.40	9.23	34.24	82.39	91.78	---	---	Peak

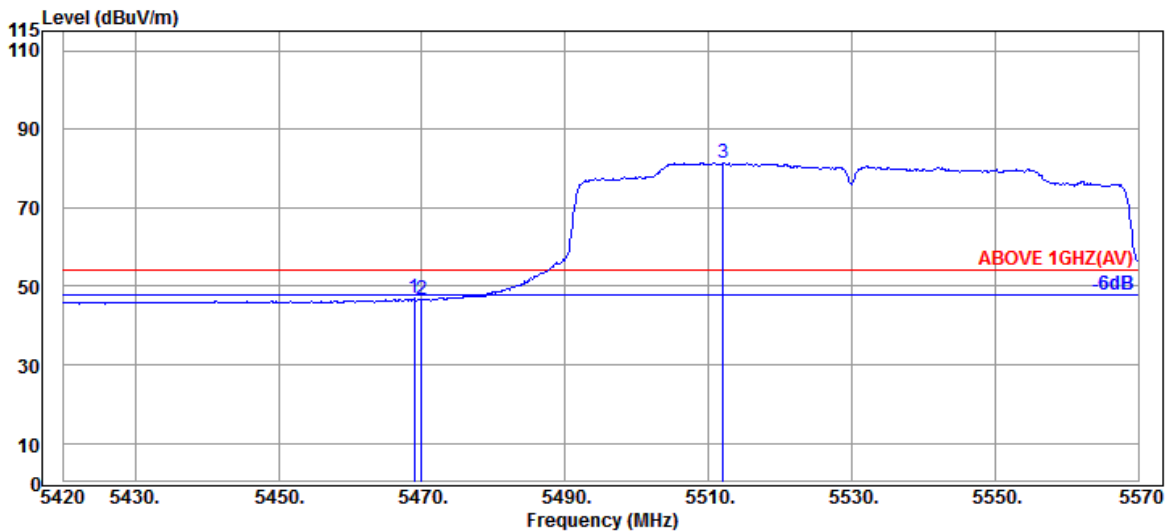


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	37.41	46.84	54.00	7.16	Average
5469.950	34.47	9.20	34.24	37.21	46.64	54.00	7.36	Average
@ 5512.100	34.37	9.23	34.24	72.09	81.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

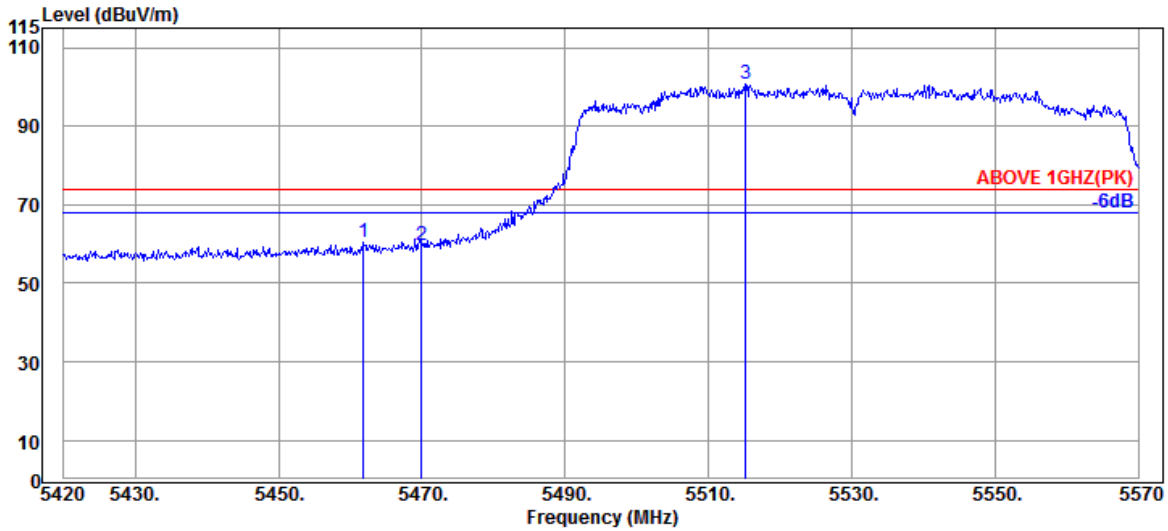

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.850	34.50	9.18	34.24	51.02	60.46	74.00	13.54	Peak
5469.950	34.47	9.20	34.24	50.20	59.63	74.00	14.37	Peak
@ 5515.250	34.37	9.24	34.24	91.30	100.67	---	---	Peak

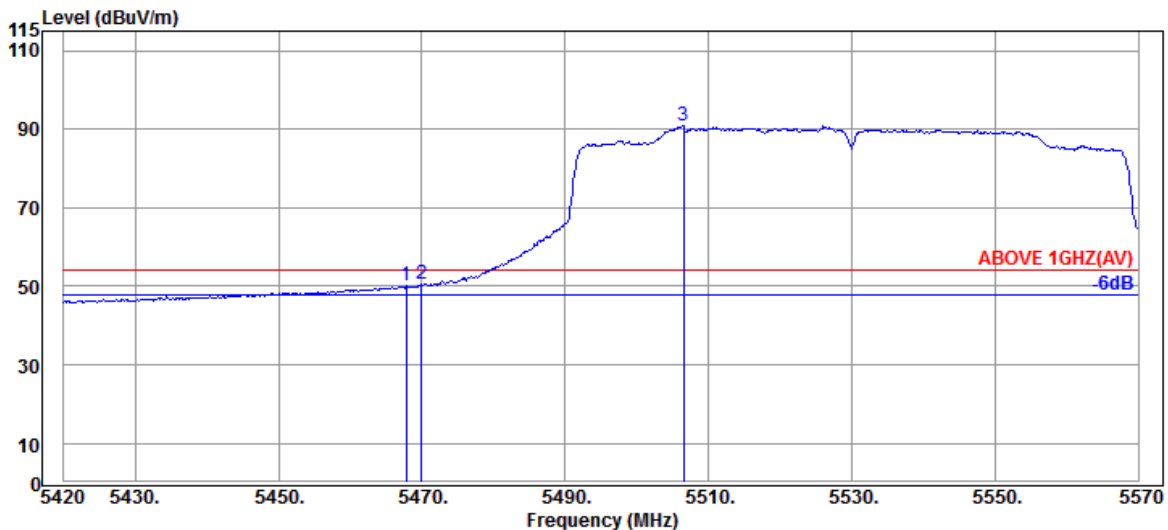


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.47	9.20	34.24	40.61	50.04	54.00	3.96	Average
5469.950	34.47	9.20	34.24	41.02	50.45	54.00	3.55	Average
@ 5506.550	34.40	9.23	34.24	81.43	90.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

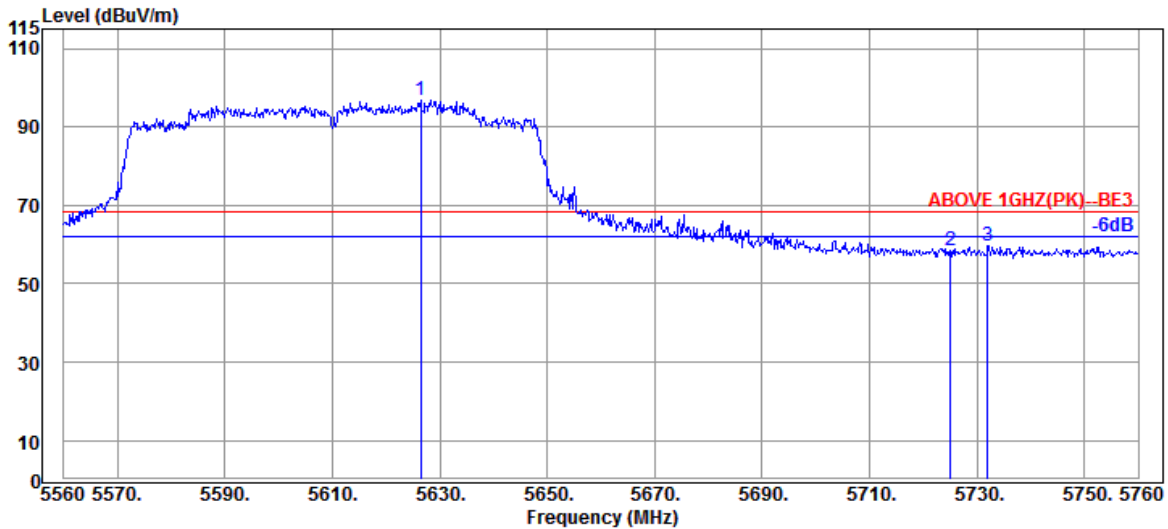

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.400	34.40	9.33	34.28	87.48	96.93	---	---	Peak
5725.000	34.67	9.42	34.32	48.66	58.43	68.20	9.77	Peak
5732.000	34.67	9.42	34.33	49.85	59.61	68.20	8.59	Peak

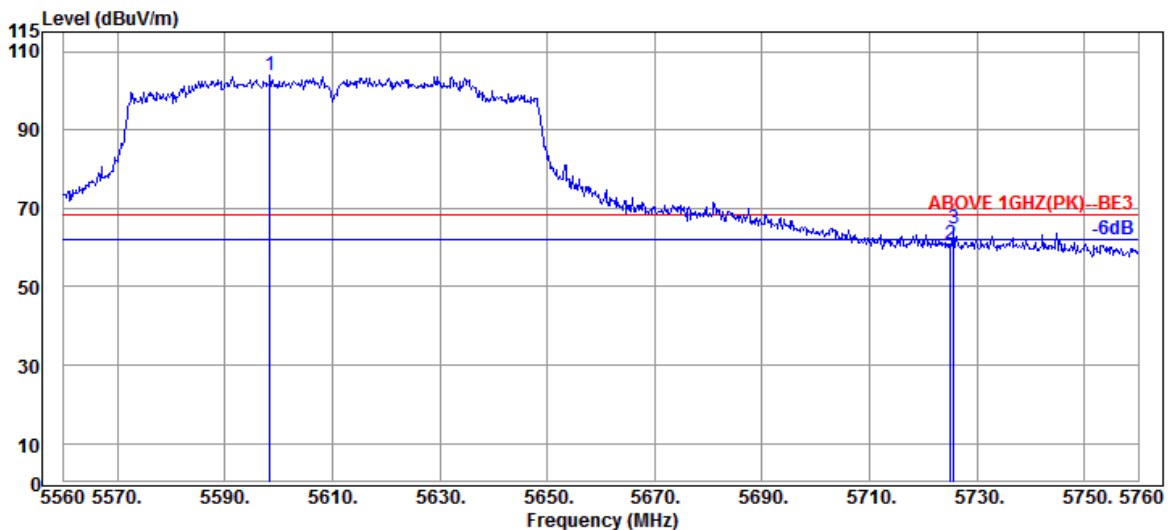


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5598.400	34.40	9.30	34.27	94.58	104.01	---	---	Peak
5725.000	34.67	9.42	34.32	51.01	60.78	68.20	7.42	Peak
5725.600	34.67	9.42	34.32	54.98	64.75	68.20	3.45	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

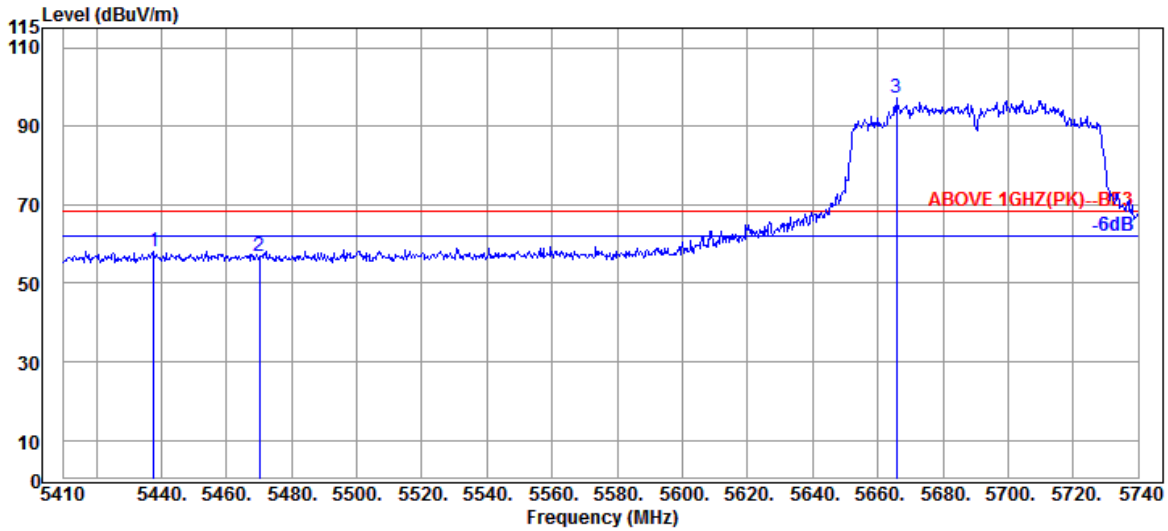

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.720	34.55	9.17	34.25	48.71	58.18	68.20	10.02	Peak
5470.060	34.47	9.20	34.24	47.67	57.10	68.20	11.10	Peak
@ 5665.750	34.40	9.36	34.30	87.68	97.14	---	---	Peak

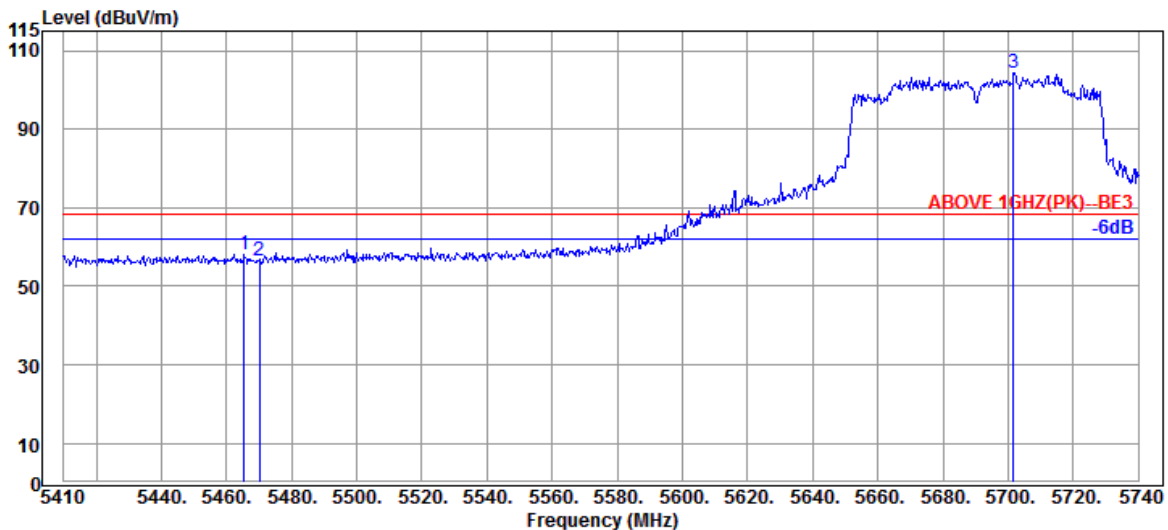


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.440	34.47	9.20	34.24	48.60	58.03	68.20	10.17	Peak
5470.060	34.47	9.20	34.24	47.25	56.68	68.20	11.52	Peak
@ 5701.720	34.40	9.40	34.31	94.99	104.48	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

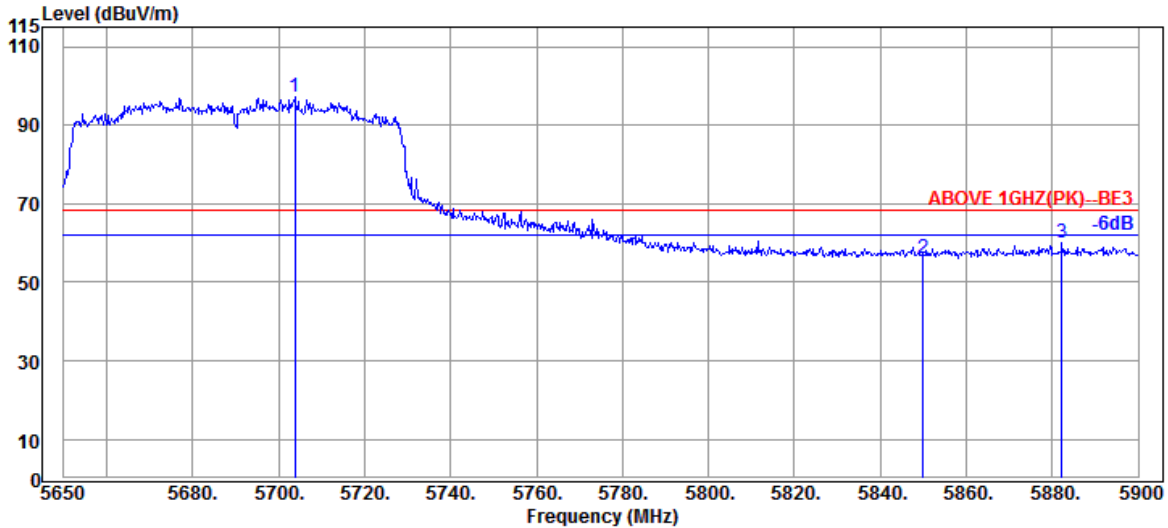

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.750	34.40	9.40	34.31	87.78	97.27	---	---	Peak
5850.000	35.10	9.52	34.38	45.95	56.19	68.20	12.01	Peak
5882.250	35.30	9.55	34.39	49.66	60.12	68.20	8.08	Peak

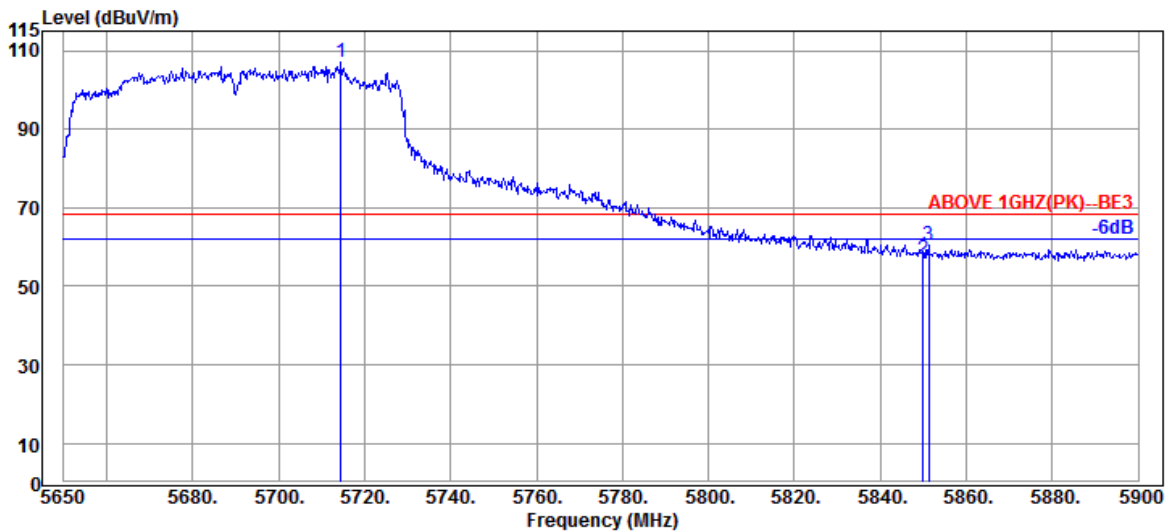


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.500	34.53	9.40	34.32	97.43	107.04	---	---	Peak
5850.000	35.10	9.52	34.38	46.86	57.10	68.20	11.10	Peak
5851.250	35.10	9.52	34.38	50.40	60.64	68.20	7.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

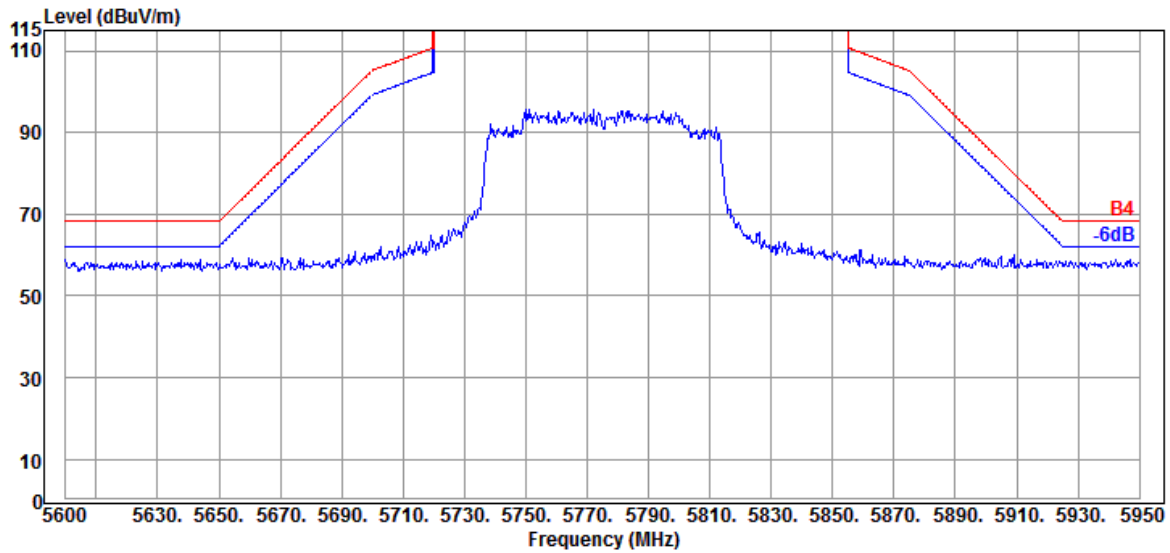

Antenna at Vertical Polarization

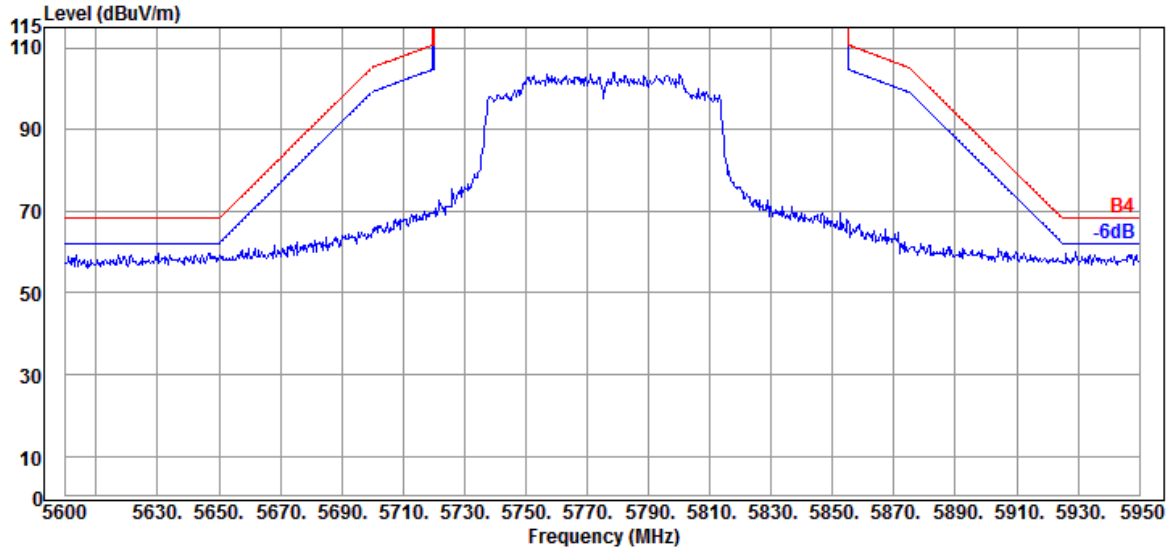


Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

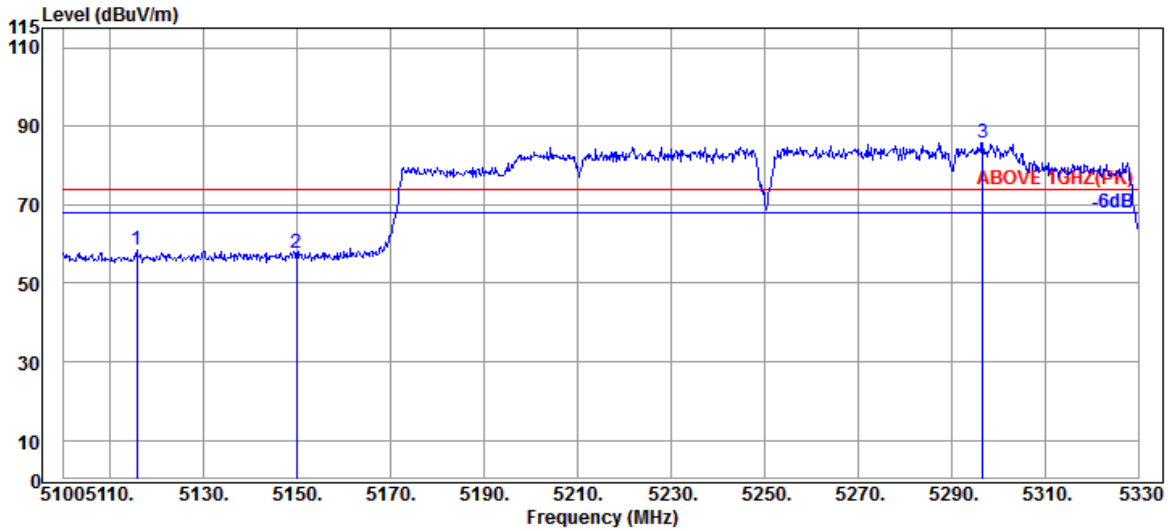

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.640	34.13	8.89	34.36	50.02	58.68	74.00	15.32	Peak
5149.910	34.20	8.92	34.35	48.77	57.54	74.00	16.46	Peak
@ 5296.650	34.50	9.05	34.30	76.68	85.93	---	---	Peak

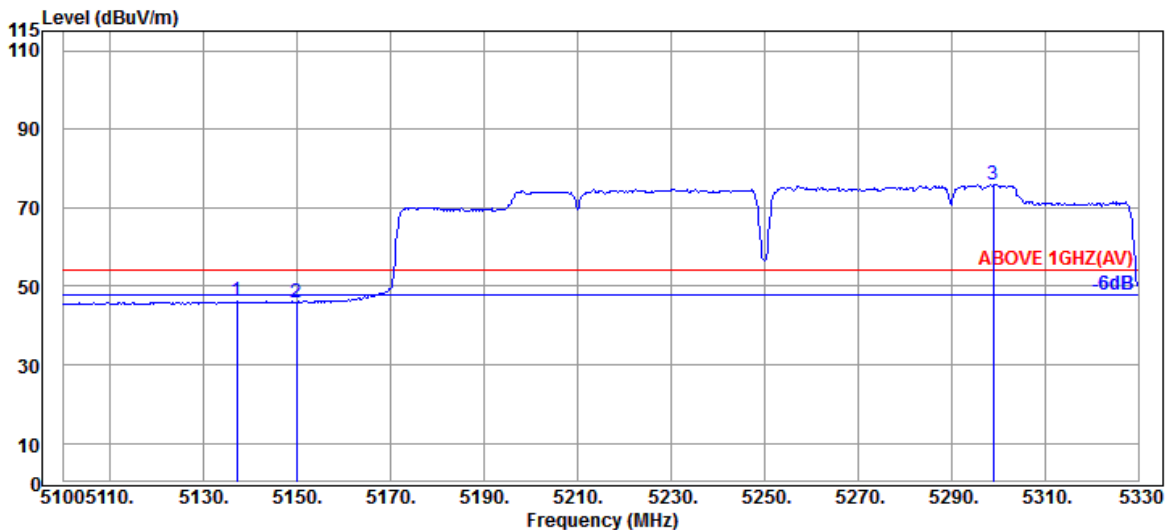


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.030	34.17	8.91	34.36	37.38	46.10	54.00	7.90	Average
5149.910	34.20	8.92	34.35	37.14	45.91	54.00	8.09	Average
@ 5298.950	34.50	9.05	34.29	66.60	75.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

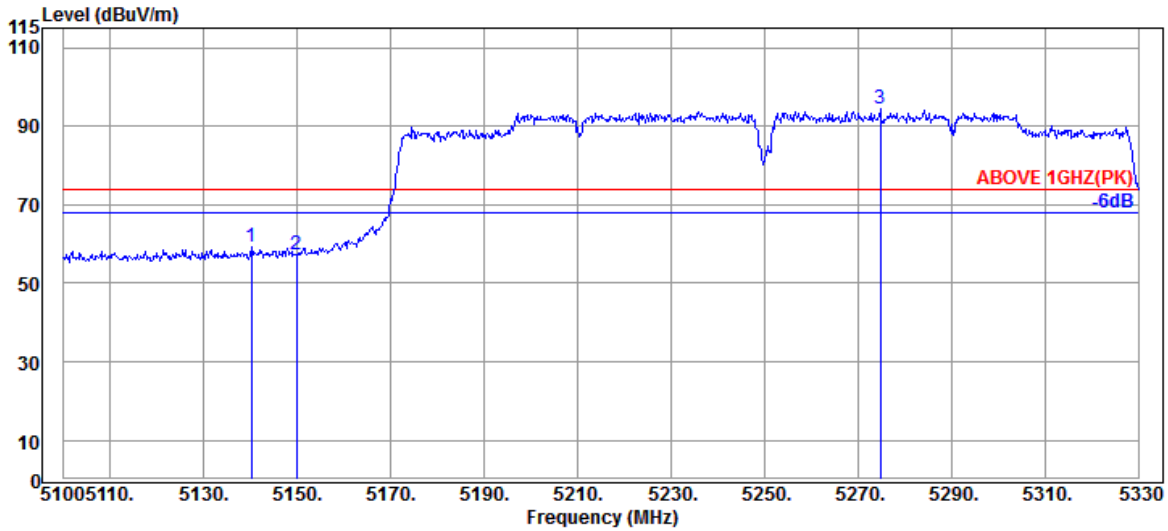

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.250	34.17	8.92	34.36	50.69	59.42	74.00	14.58	Peak
5149.910	34.20	8.92	34.35	48.34	57.11	74.00	16.89	Peak
@ 5274.800	34.43	9.02	34.30	85.22	94.37	---	---	Peak

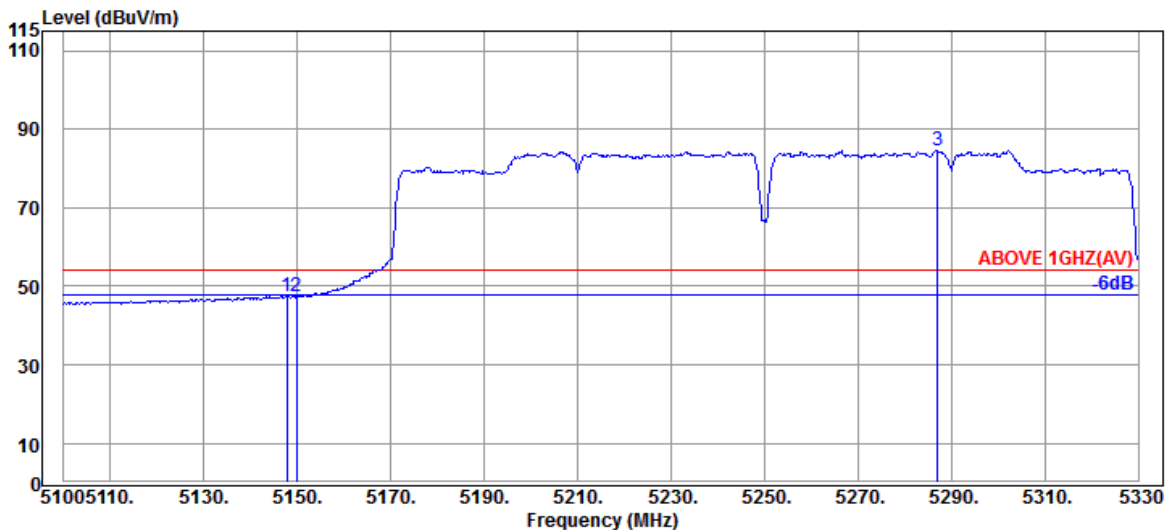


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	34.20	8.92	34.35	38.75	47.52	54.00	6.48	Average
5149.910	34.20	8.92	34.35	38.66	47.43	54.00	6.57	Average
@ 5286.990	34.47	9.04	34.30	75.29	84.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

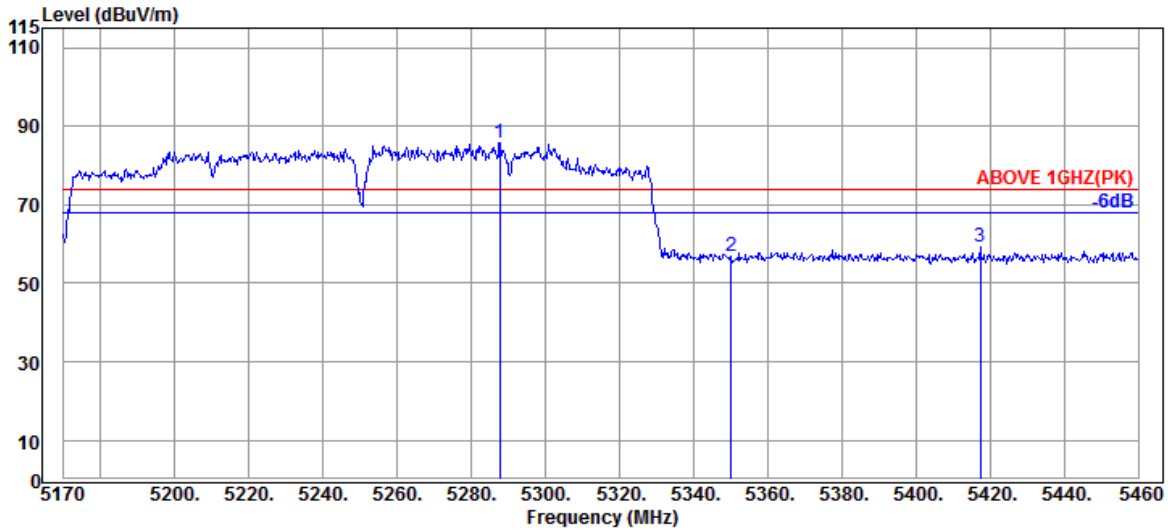

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.740	34.47	9.04	34.30	76.51	85.72	---	---	Peak
5350.090	34.60	9.10	34.27	47.52	56.95	74.00	17.05	Peak
5417.370	34.60	9.15	34.26	49.66	59.15	74.00	14.85	Peak

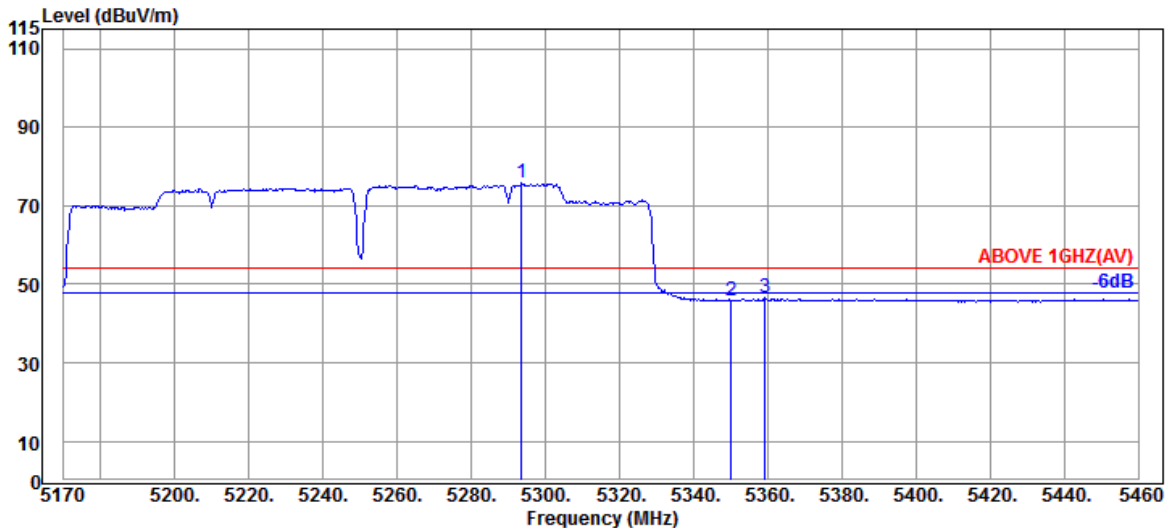


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.540	34.50	9.05	34.30	66.45	75.70	---	---	Average
5350.090	34.60	9.10	34.27	36.52	45.95	54.00	8.05	Average
5359.370	34.63	9.10	34.27	37.02	46.48	54.00	7.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

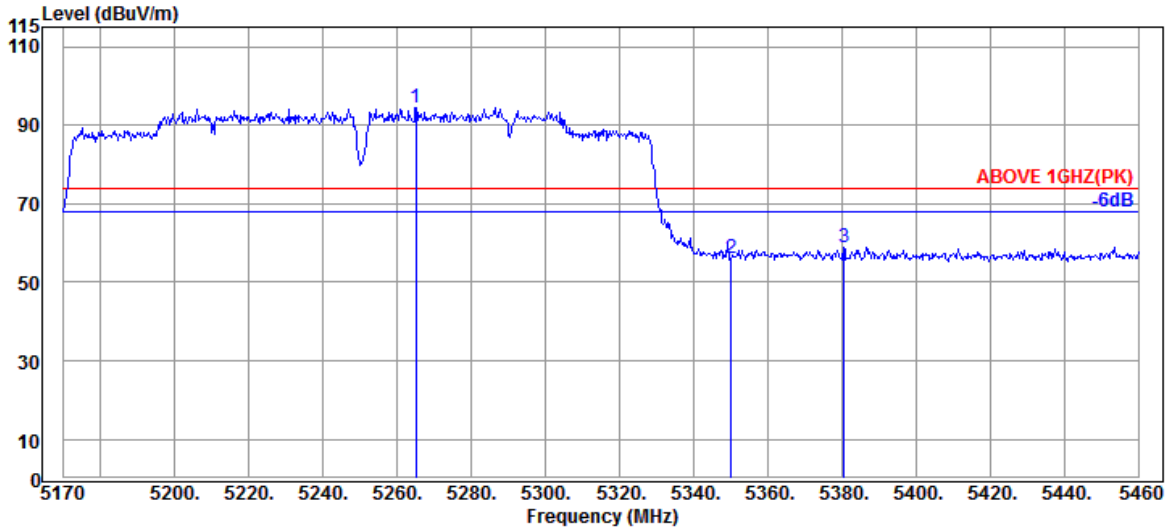

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.120	34.43	9.02	34.31	85.46	94.60	---	---	Peak
5350.090	34.60	9.10	34.27	46.73	56.16	74.00	17.84	Peak
5380.540	34.67	9.13	34.27	49.54	59.07	74.00	14.93	Peak

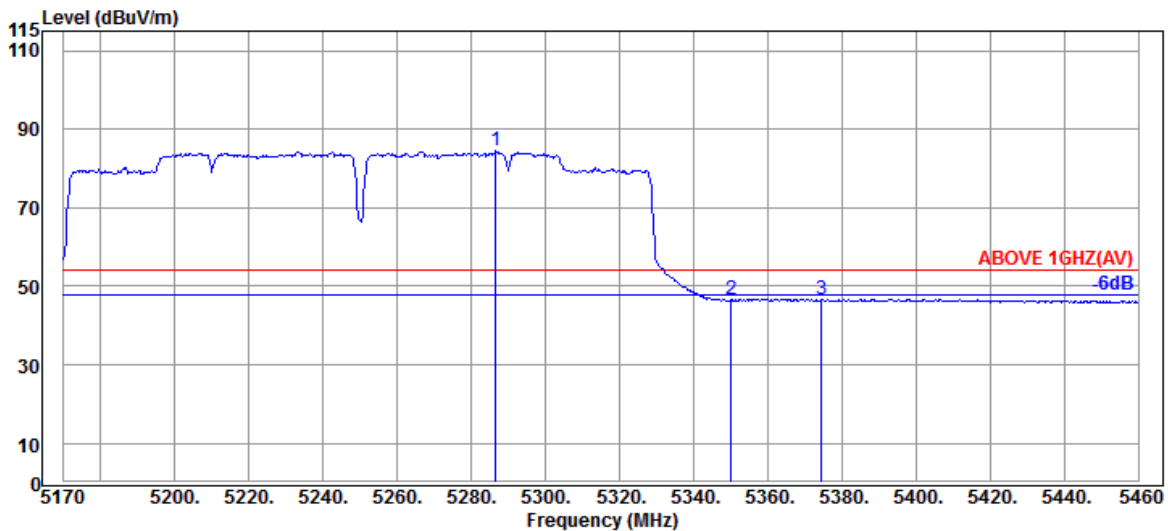


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	34.47	9.04	34.30	75.23	84.44	---	---	Average
5350.090	34.60	9.10	34.27	37.02	46.45	54.00	7.55	Average
5374.450	34.67	9.11	34.27	37.26	46.77	54.00	7.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

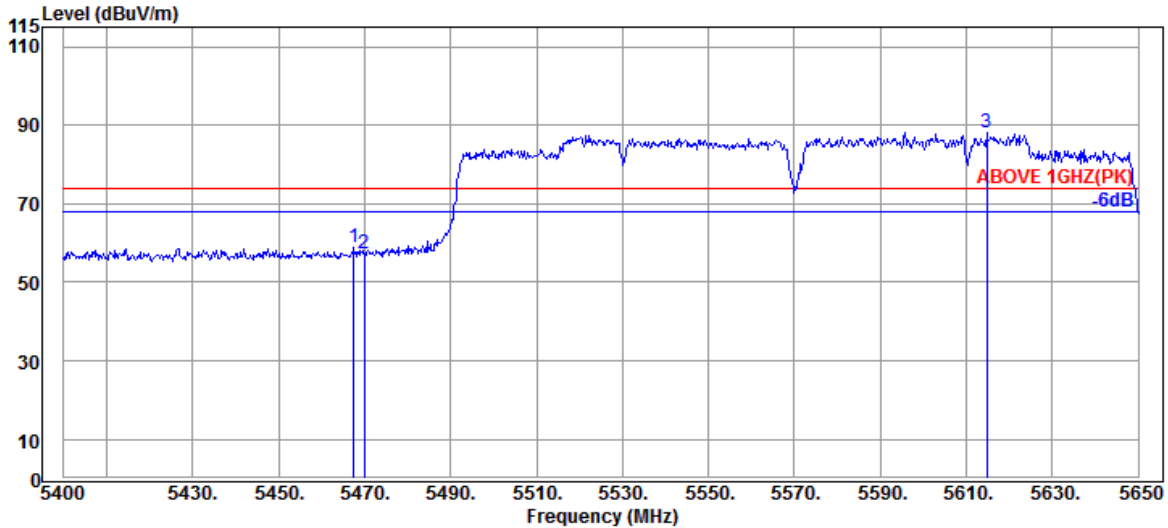

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	9.20	34.24	49.32	58.75	74.00	15.25	Peak
5470.000	34.47	9.20	34.24	47.90	57.33	74.00	16.67	Peak
@ 5614.750	34.40	9.31	34.28	78.62	88.05	---	---	Peak

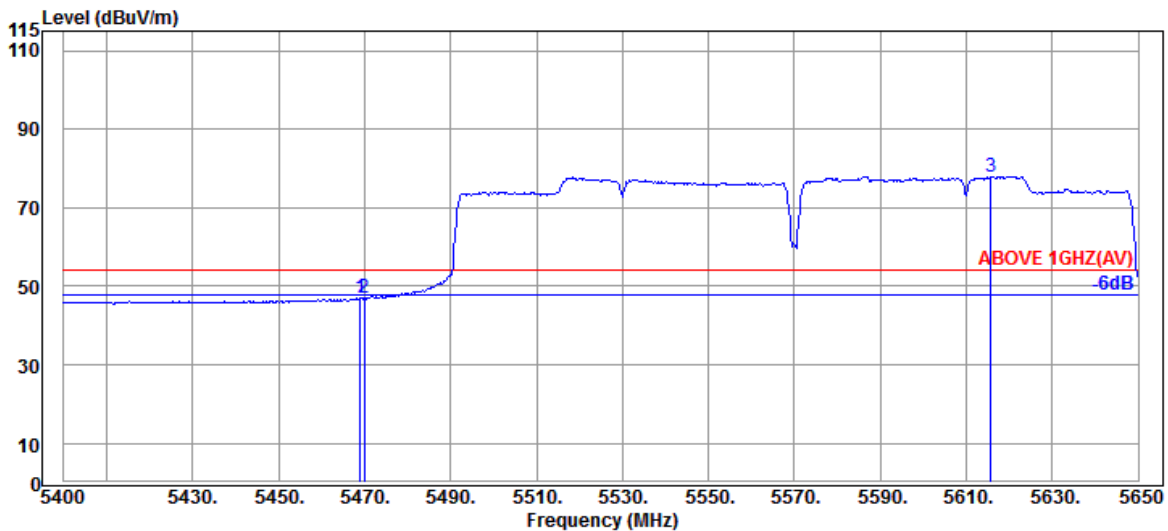


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	9.20	34.24	37.60	47.03	54.00	6.97	Average
5470.000	34.47	9.20	34.24	37.43	46.86	54.00	7.14	Average
@ 5615.750	34.40	9.33	34.28	68.59	78.04	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

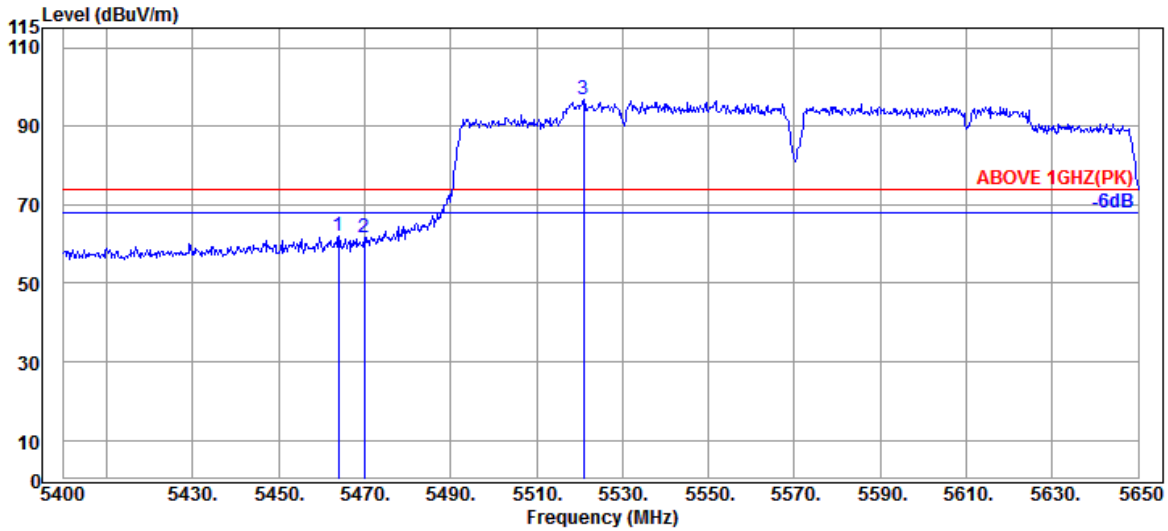

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.47	9.20	34.24	52.54	61.97	74.00	12.03	Peak
5470.000	34.47	9.20	34.24	52.23	61.66	74.00	12.34	Peak
@ 5521.000	34.37	9.24	34.24	87.27	96.64	---	---	Peak

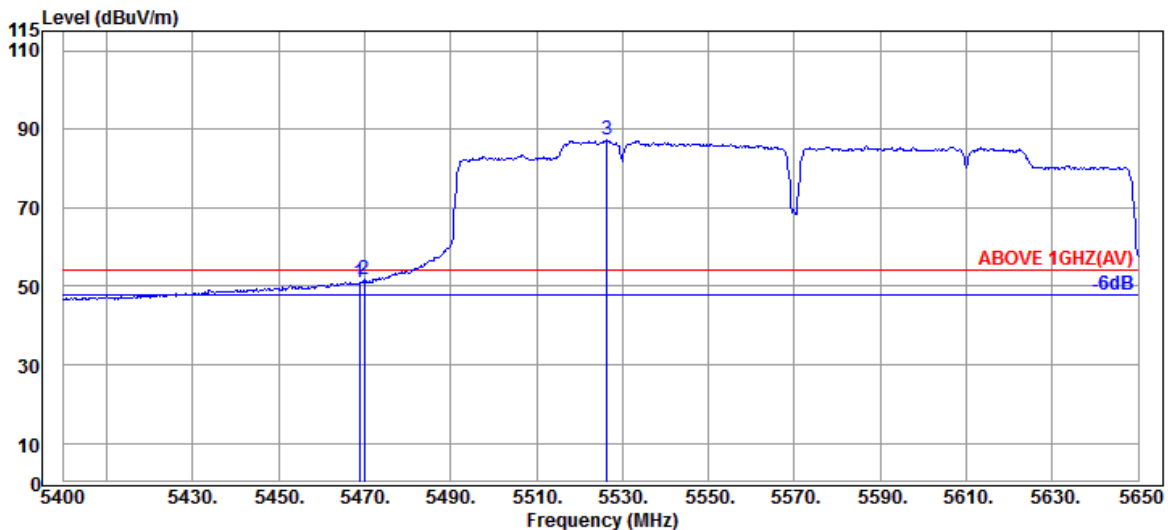


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	9.20	34.24	41.54	50.97	54.00	3.03	Average
5470.000	34.47	9.20	34.24	42.24	51.67	54.00	2.33	Average
@ 5526.500	34.37	9.24	34.25	77.88	87.24	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

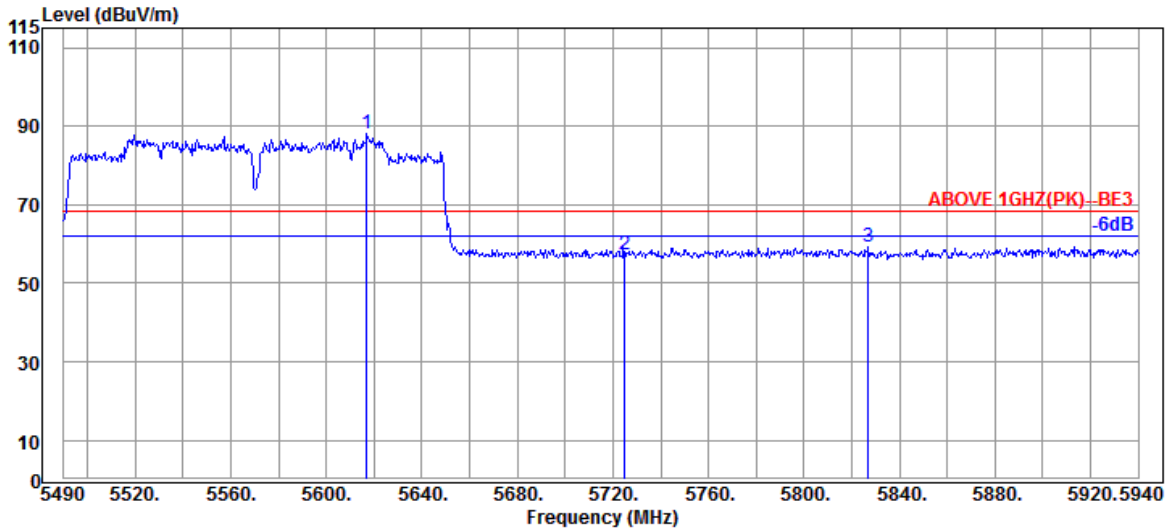

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5616.900	34.40	9.33	34.28	78.52	87.97	---	---	Peak
5724.900	34.67	9.42	34.32	47.54	57.31	68.20	10.89	Peak
5827.050	35.07	9.50	34.37	48.99	59.19	68.20	9.01	Peak

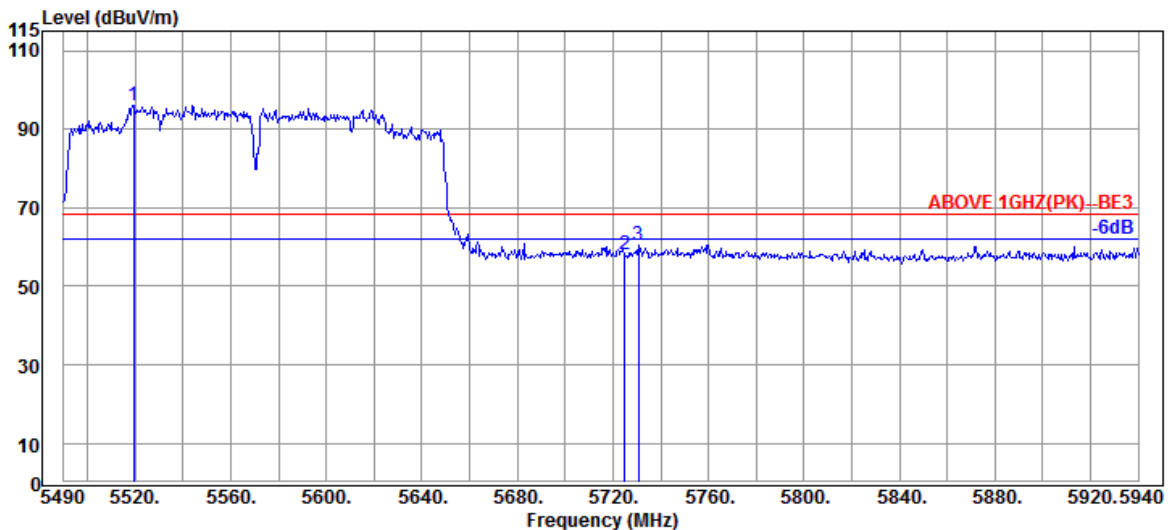


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5519.250	34.37	9.24	34.24	86.76	96.13	---	---	Peak
5724.900	34.67	9.42	34.32	48.36	58.13	68.20	10.07	Peak
5730.750	34.67	9.42	34.33	50.82	60.58	68.20	7.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

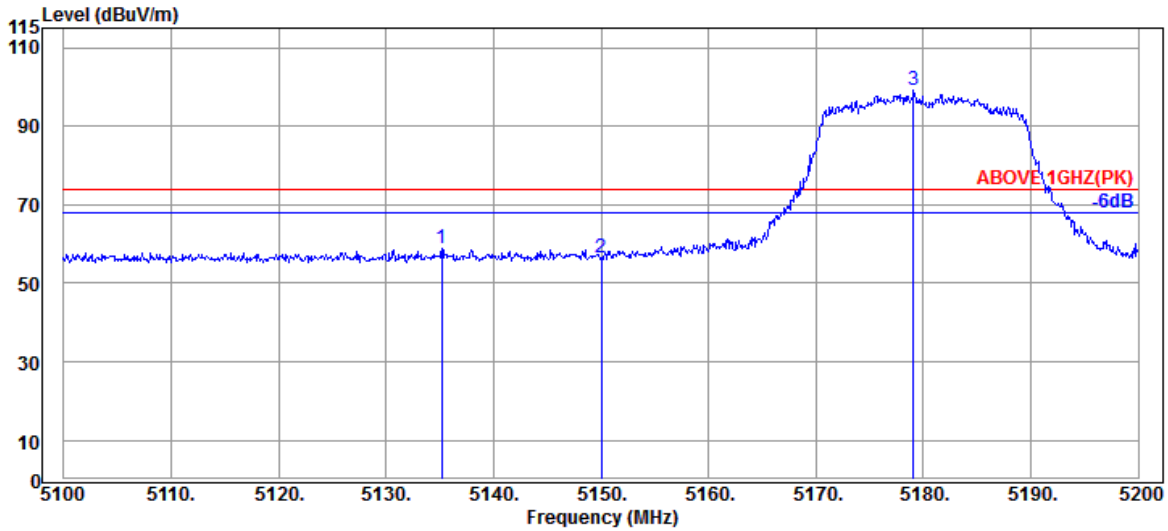

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.200	34.17	8.91	34.36	49.98	58.70	74.00	15.30	Peak
5150.000	34.20	8.92	34.35	47.77	56.54	74.00	17.46	Peak
@ 5179.100	34.20	8.95	34.34	90.28	99.09	---	---	Peak

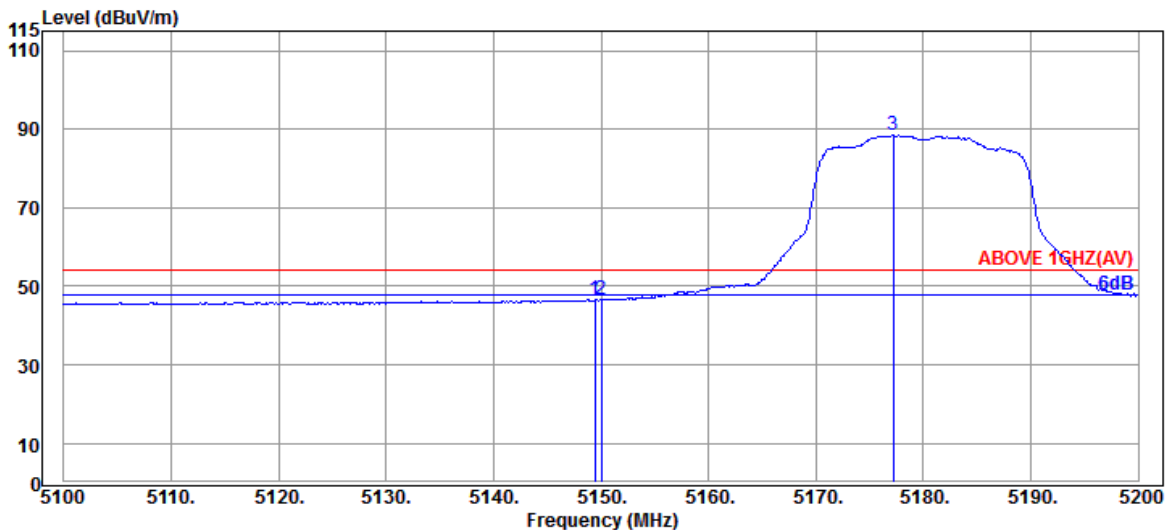


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	8.92	34.35	38.01	46.78	54.00	7.22	Average
5150.000	34.20	8.92	34.35	37.75	46.52	54.00	7.48	Average
@ 5177.200	34.20	8.95	34.34	79.63	88.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

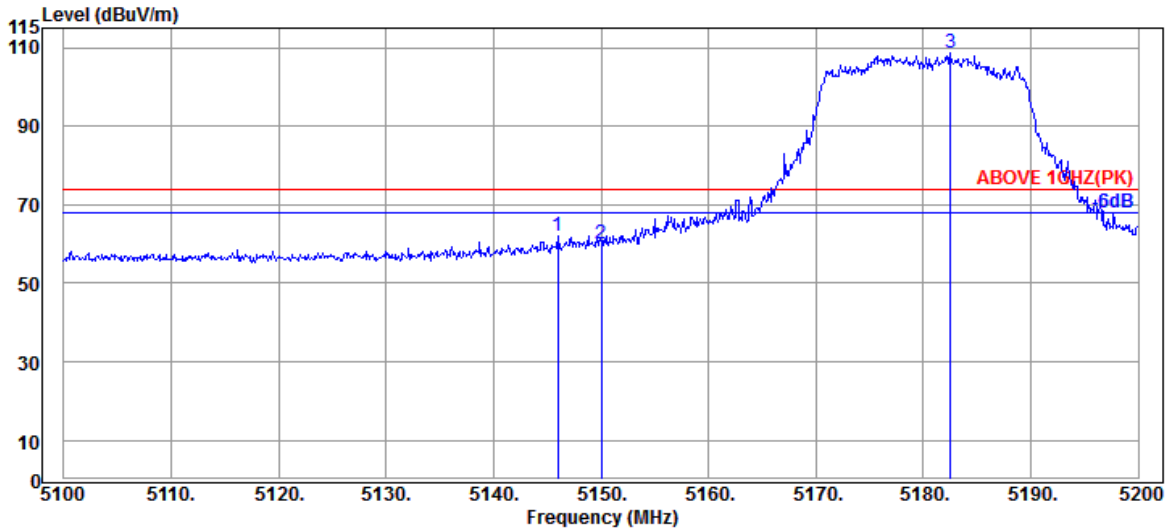

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	34.20	8.92	34.35	53.33	62.10	74.00	11.90	Peak
5150.000	34.20	8.92	34.35	51.24	60.01	74.00	13.99	Peak
@ 5182.500	34.20	8.95	34.34	99.76	108.57	---	---	Peak

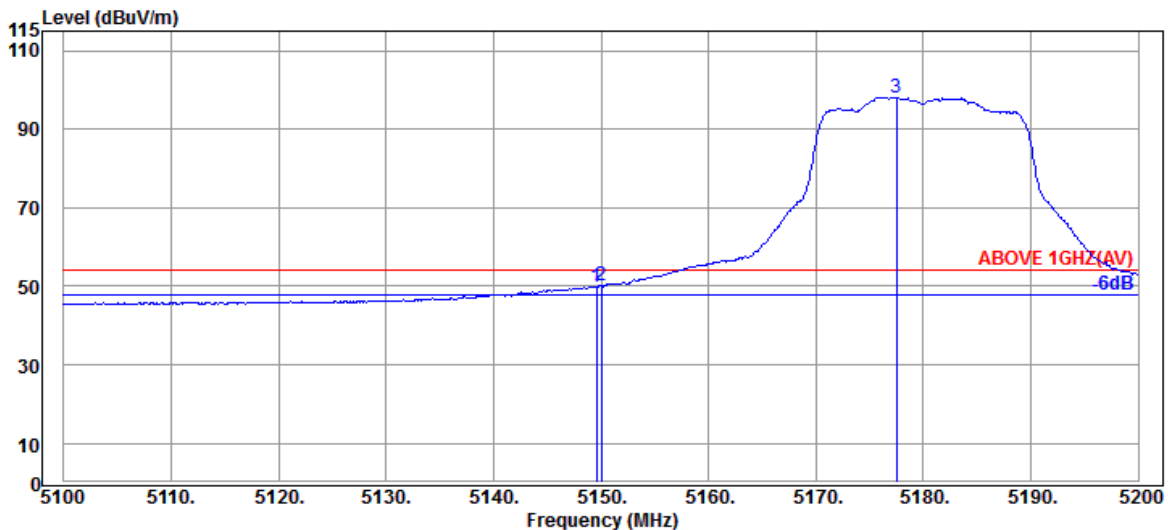


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	41.19	49.96	54.00	4.04	Average
5150.000	34.20	8.92	34.35	41.30	50.07	54.00	3.93	Average
@ 5177.500	34.20	8.95	34.34	89.26	98.07	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

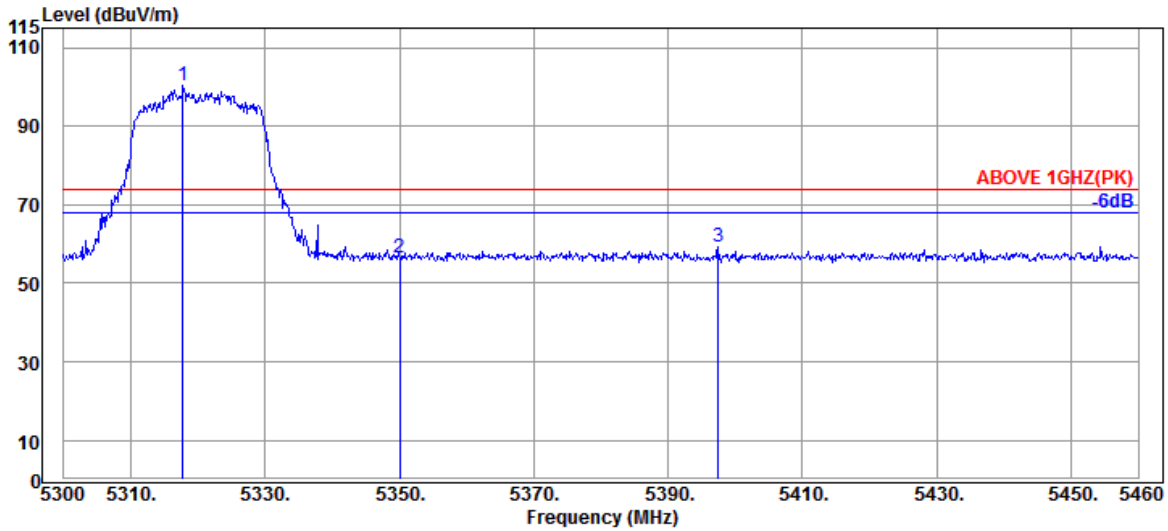

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.53	9.07	34.29	90.87	100.18	---	---	Peak
5350.080	34.60	9.10	34.27	47.22	56.65	74.00	17.35	Peak
5397.440	34.70	9.14	34.27	49.73	59.30	74.00	14.70	Peak

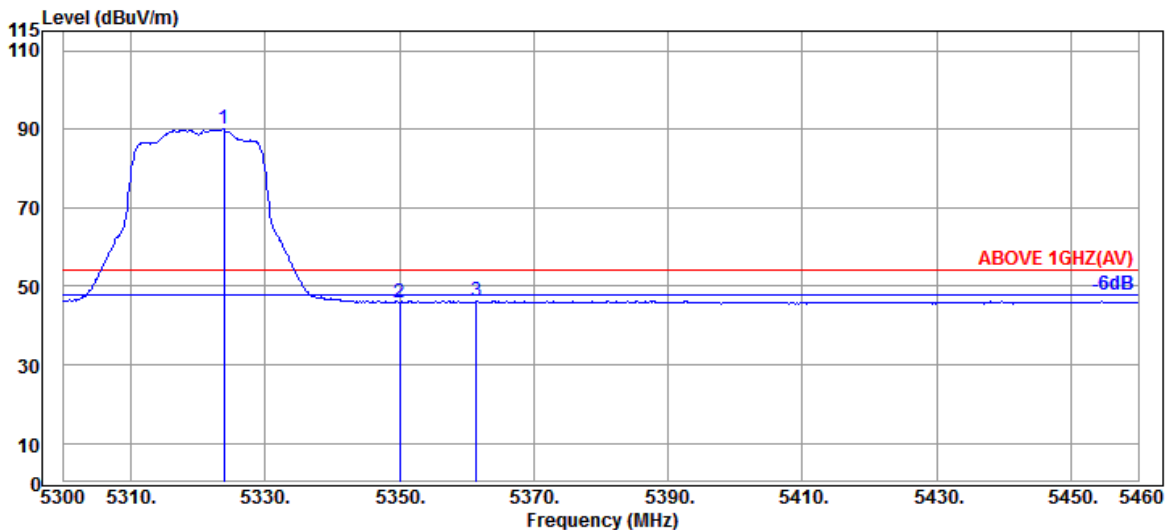


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.57	9.07	34.28	80.69	90.05	---	---	Average
5350.080	34.60	9.10	34.27	36.41	45.84	54.00	8.16	Average
5361.440	34.63	9.11	34.27	36.80	46.27	54.00	7.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

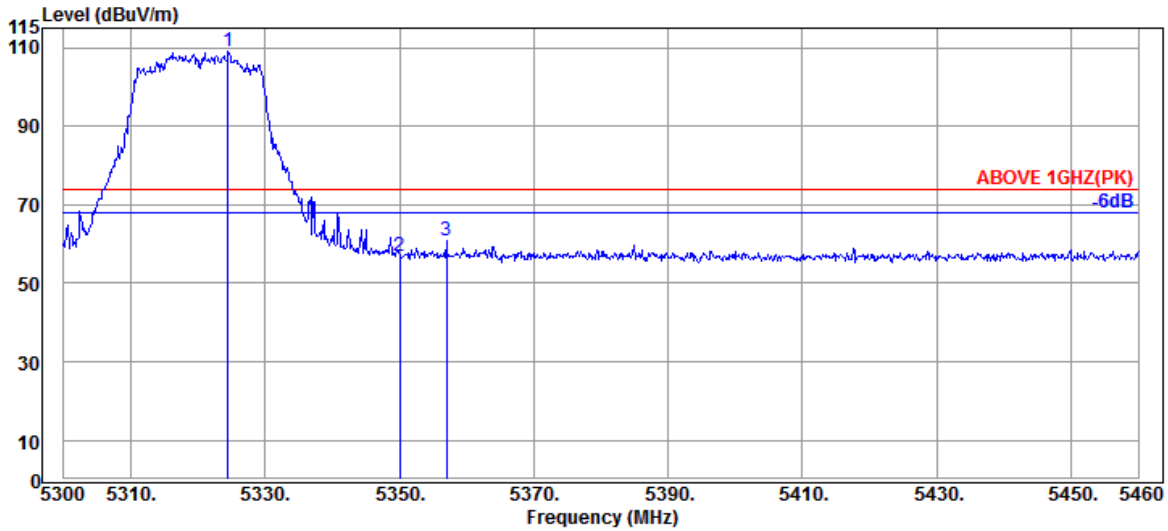

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.480	34.57	9.07	34.28	99.79	109.15	---	---	Peak
5350.080	34.60	9.10	34.27	47.61	57.04	74.00	16.96	Peak
5356.960	34.63	9.10	34.27	51.38	60.84	74.00	13.16	Peak

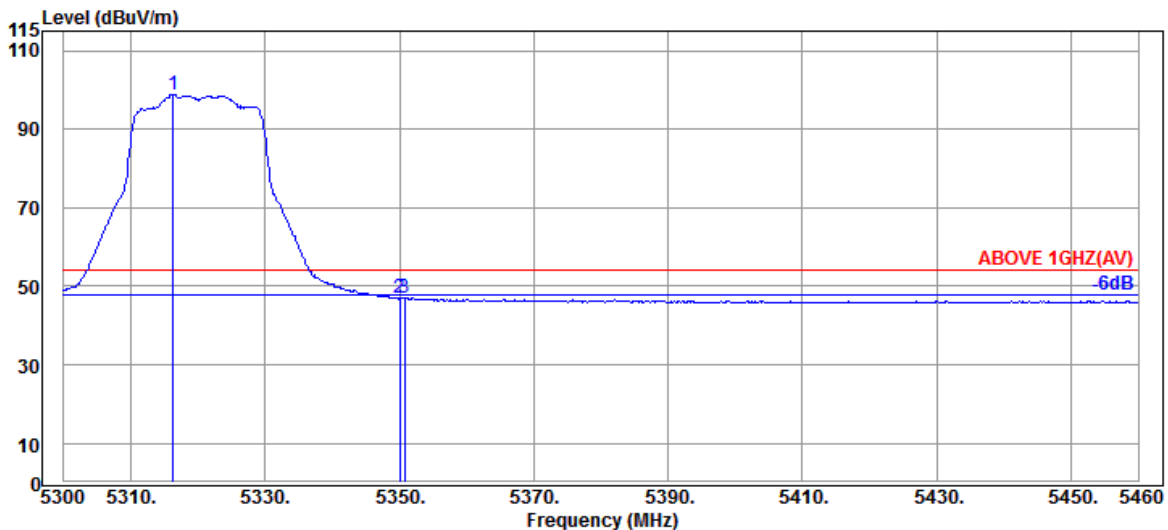


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.53	9.07	34.29	89.59	98.90	---	---	Average
5350.080	34.60	9.10	34.27	37.54	46.97	54.00	7.03	Average
5350.720	34.60	9.10	34.27	37.79	47.22	54.00	6.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

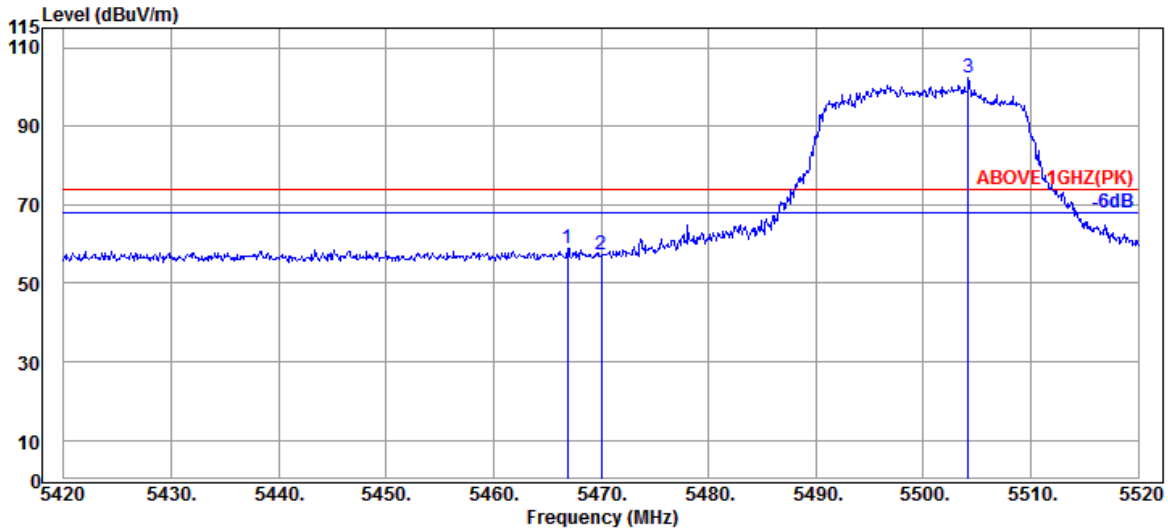

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.47	9.20	34.24	49.40	58.83	74.00	15.17	Peak
5470.000	34.47	9.20	34.24	47.79	57.22	74.00	16.78	Peak
@ 5504.200	34.40	9.23	34.24	92.99	102.38	---	---	Peak

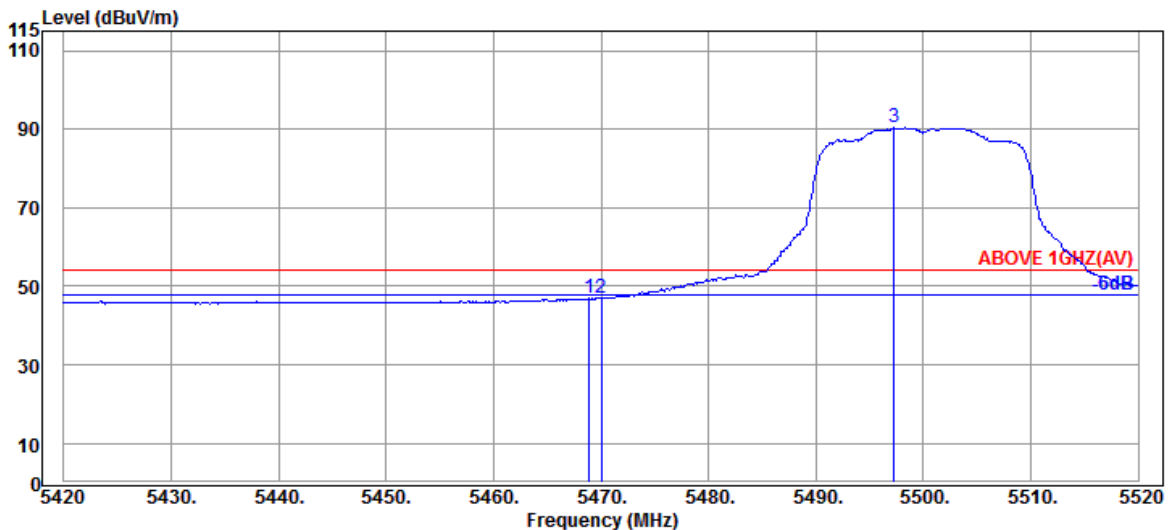


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	37.41	46.84	54.00	7.16	Average
5470.000	34.47	9.20	34.24	37.48	46.91	54.00	7.09	Average
@ 5497.300	34.40	9.23	34.23	80.94	90.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

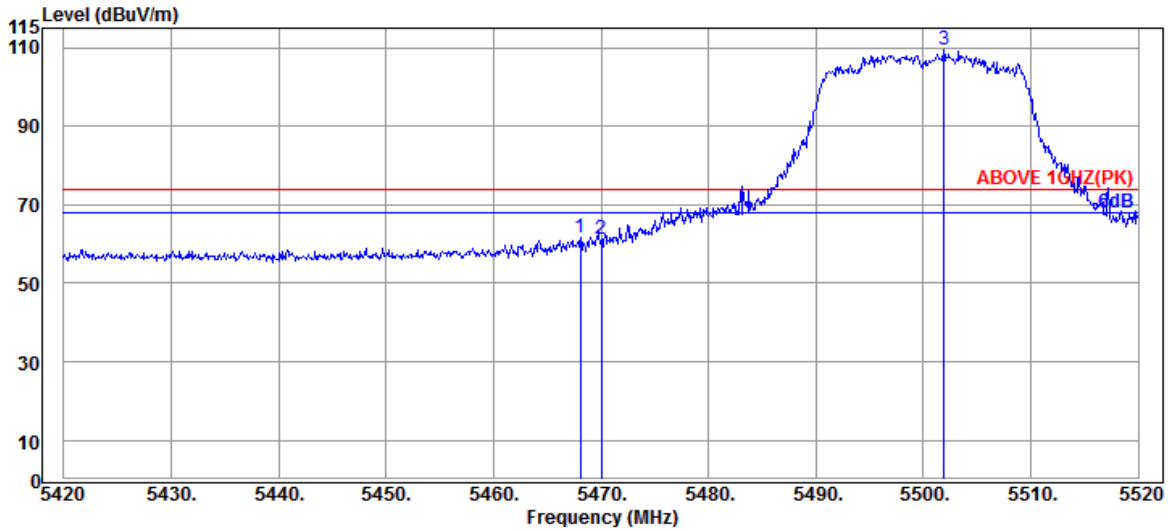

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.47	9.20	34.24	52.23	61.66	74.00	12.34	Peak
5470.000	34.47	9.20	34.24	51.87	61.30	74.00	12.70	Peak
@ 5501.900	34.40	9.23	34.24	99.90	109.29	---	---	Peak

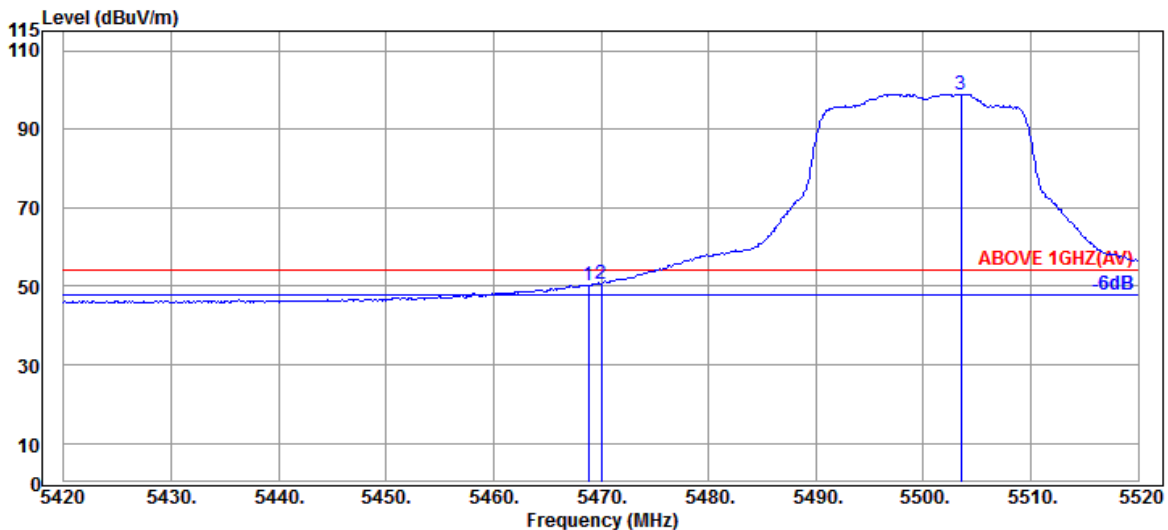


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.47	9.20	34.24	40.92	50.35	54.00	3.65	Average
5470.000	34.47	9.20	34.24	41.35	50.78	54.00	3.22	Average
@ 5503.500	34.40	9.23	34.24	89.59	98.98	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

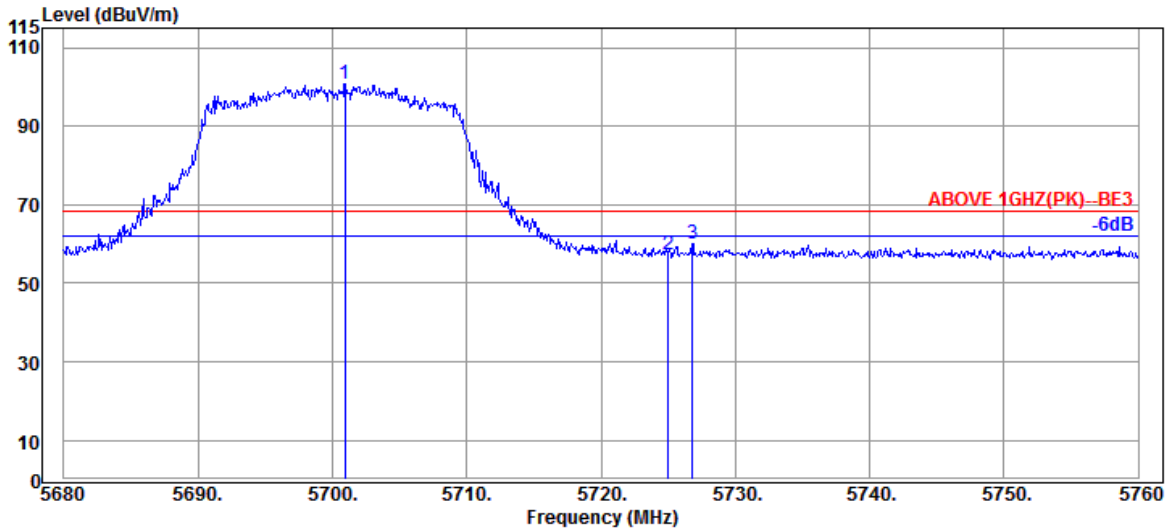

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	34.40	9.40	34.31	91.38	100.87	---	---	Peak
5725.040	34.67	9.42	34.32	47.43	57.20	68.20	11.00	Peak
5726.800	34.67	9.42	34.32	50.26	60.03	68.20	8.17	Peak

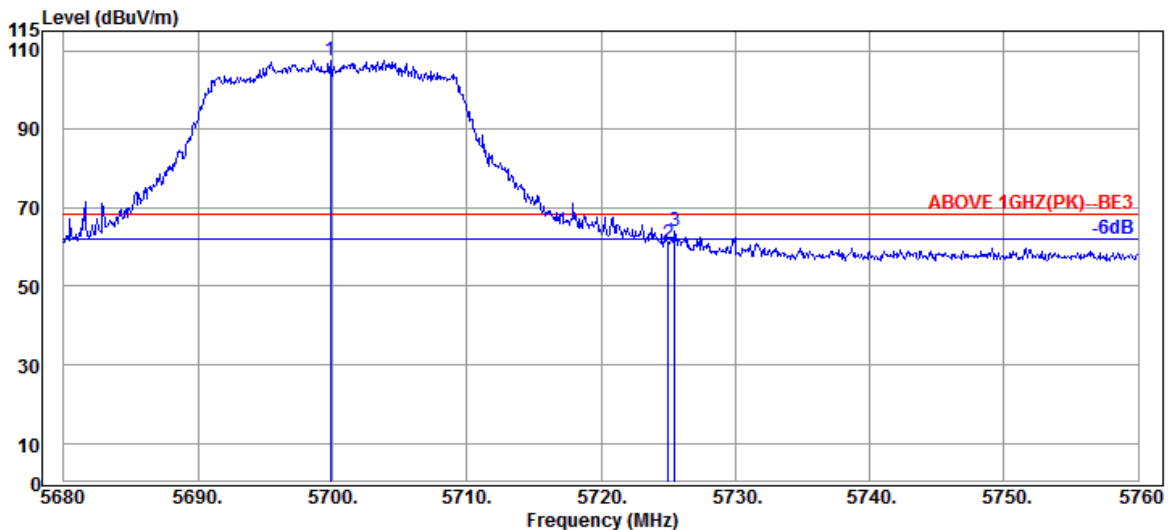


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.840	34.40	9.39	34.31	97.90	107.38	---	---	Peak
5725.040	34.67	9.42	34.32	51.08	60.85	68.20	7.35	Peak
5725.520	34.67	9.42	34.32	54.22	63.99	68.20	4.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

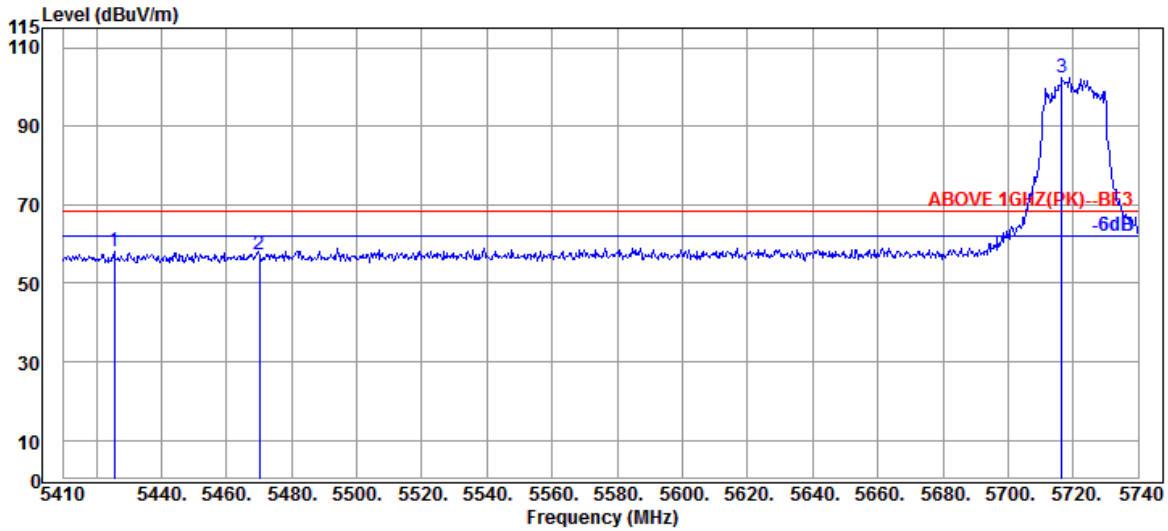

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.510	34.60	9.15	34.25	48.65	58.15	68.20	10.05	Peak
5470.060	34.47	9.20	34.24	47.98	57.41	68.20	10.79	Peak
@ 5716.570	34.53	9.40	34.32	92.66	102.27	---	---	Peak

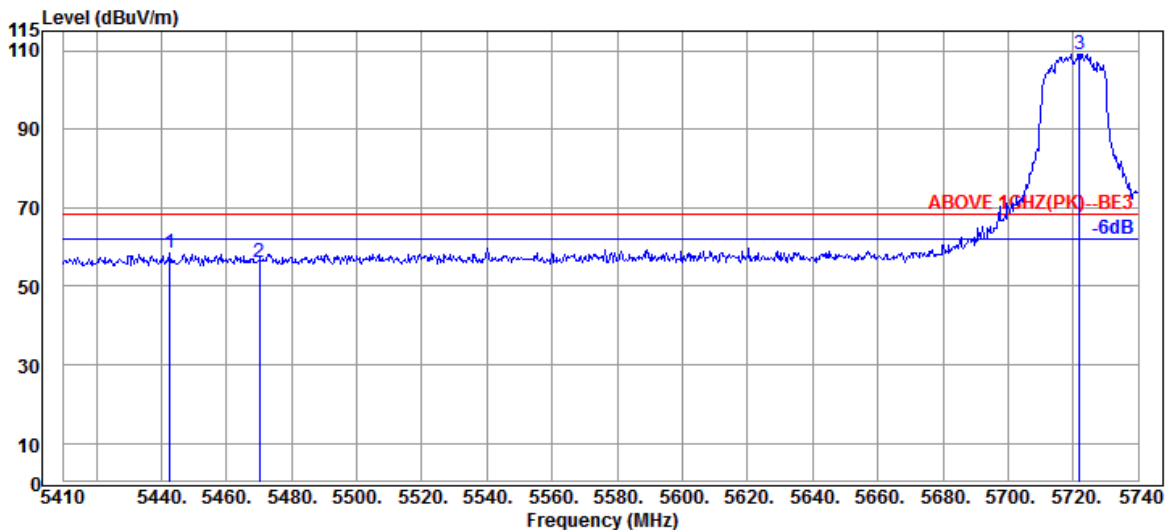


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.670	34.55	9.17	34.25	49.15	58.62	68.20	9.58	Peak
5470.060	34.47	9.20	34.24	46.71	56.14	68.20	12.06	Peak
@ 5721.850	34.53	9.42	34.32	99.64	109.27	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

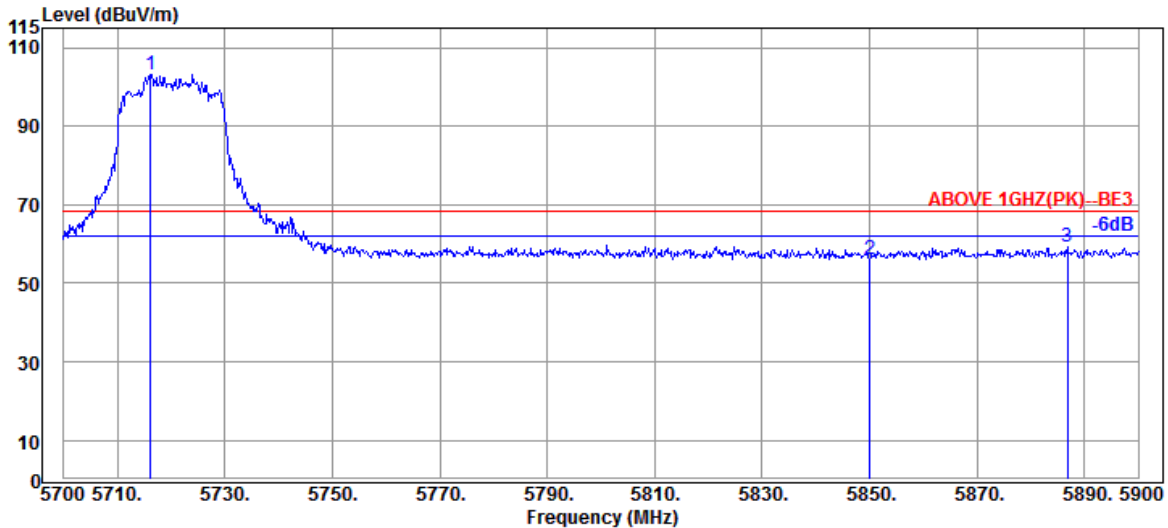

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.200	34.53	9.40	34.32	93.57	103.18	---	---	Peak
5850.000	35.10	9.52	34.38	45.68	55.92	68.20	12.28	Peak
5886.800	35.30	9.55	34.40	48.70	59.15	68.20	9.05	Peak

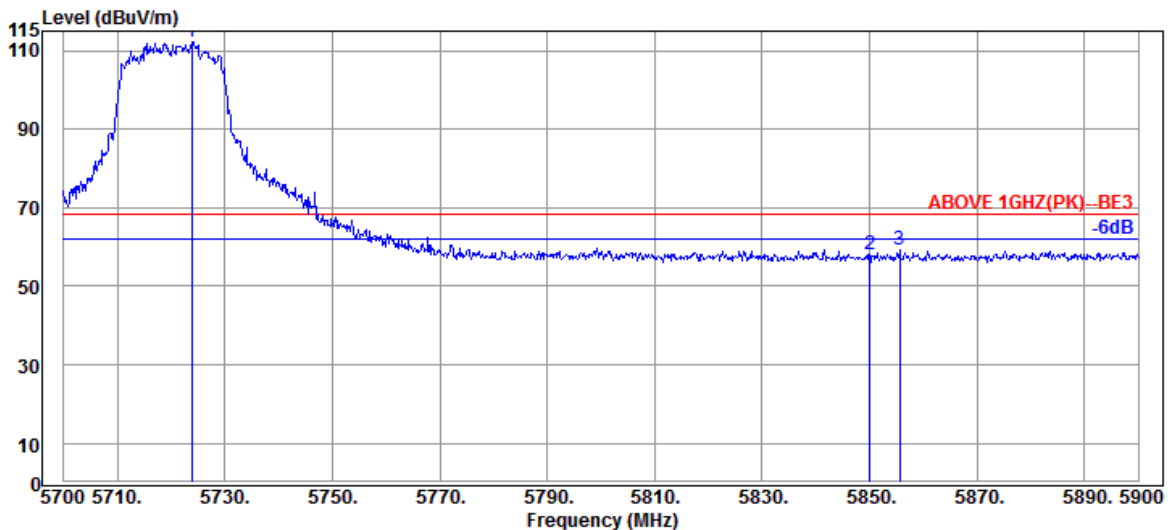


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	34.67	9.42	34.32	102.32	112.09	---	---	Peak
5850.000	35.10	9.52	34.38	47.71	57.95	68.20	10.25	Peak
5855.600	35.10	9.53	34.38	48.86	59.11	68.20	9.09	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

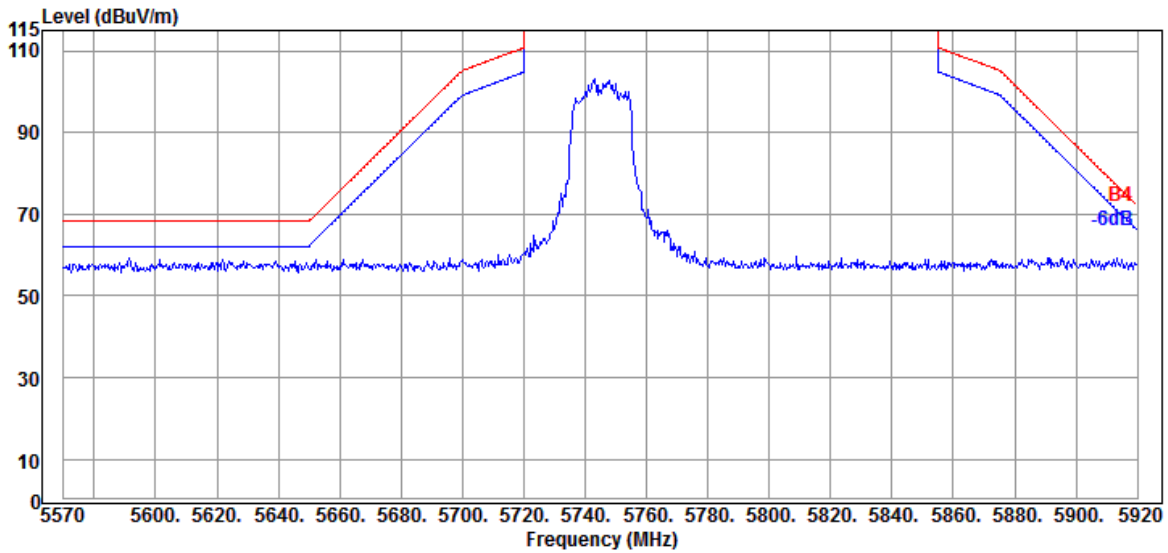


Antenna at Vertical Polarization

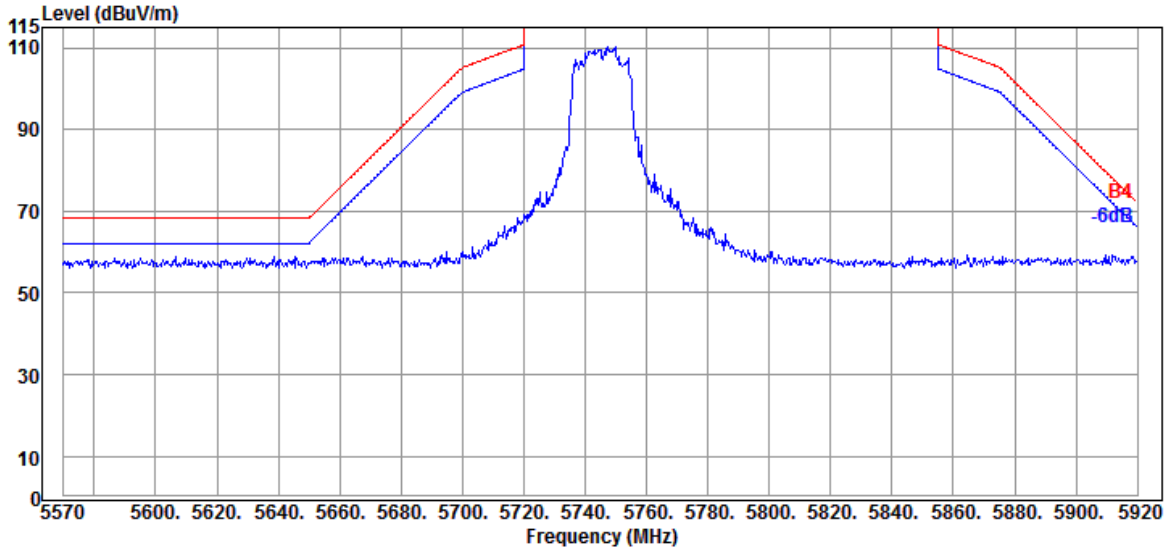


Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

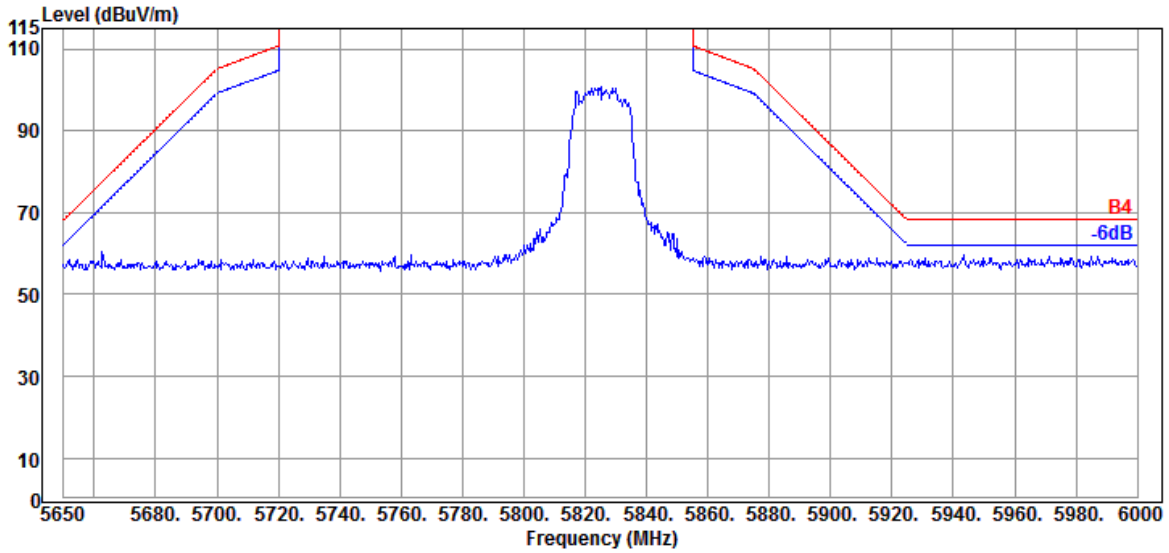

Antenna at Vertical Polarization

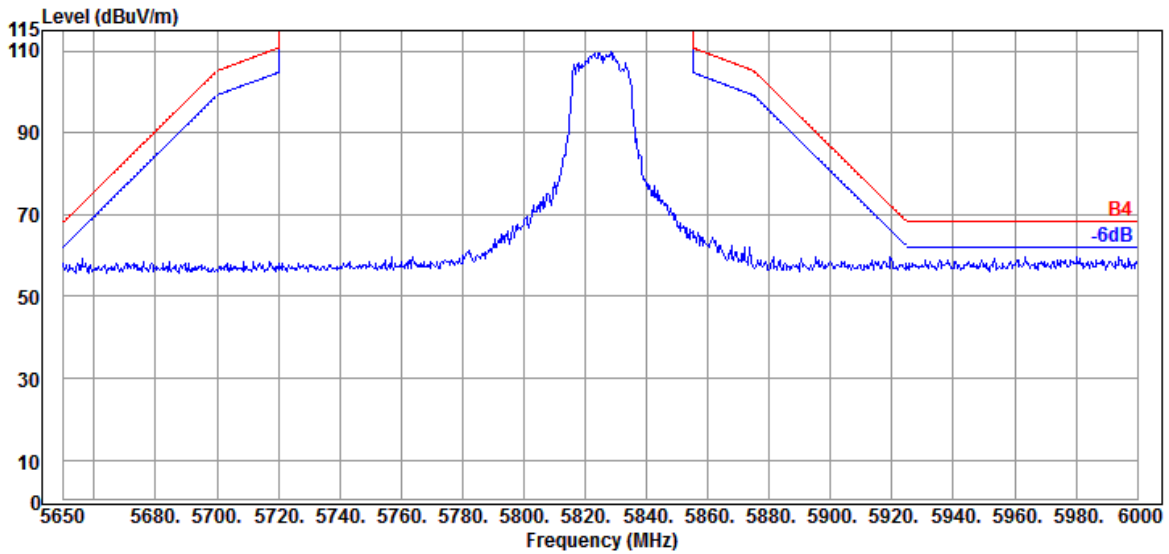


Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

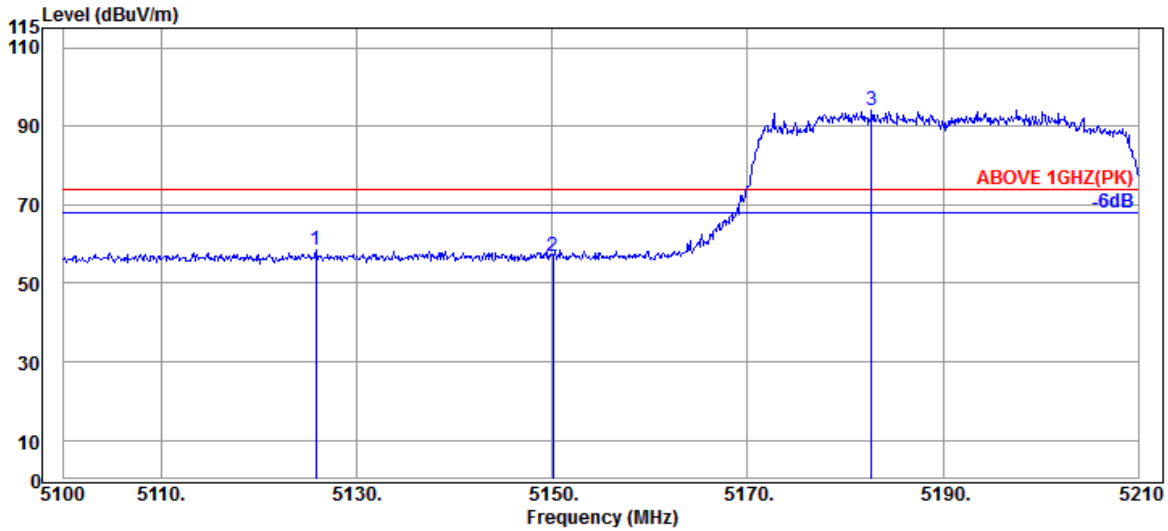

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.850	34.13	8.91	34.36	49.81	58.49	74.00	15.51	Peak
5150.050	34.20	8.92	34.35	47.98	56.75	74.00	17.25	Peak
@ 5182.720	34.20	8.95	34.34	85.15	93.96	---	---	Peak

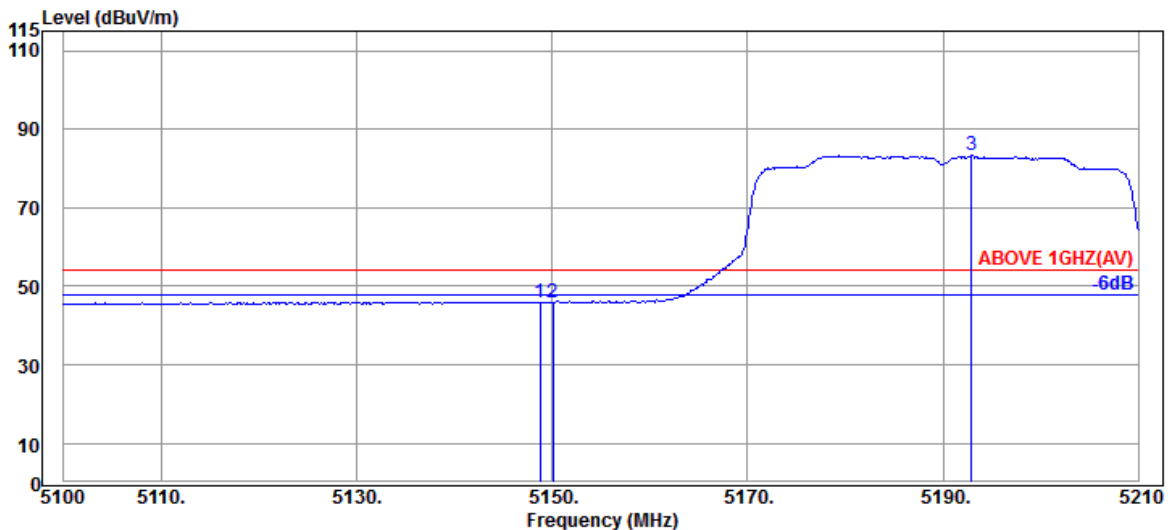


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	34.20	8.92	34.35	37.26	46.03	54.00	7.97	Average
5150.050	34.20	8.92	34.35	37.17	45.94	54.00	8.06	Average
@ 5192.950	34.20	8.96	34.34	74.50	83.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

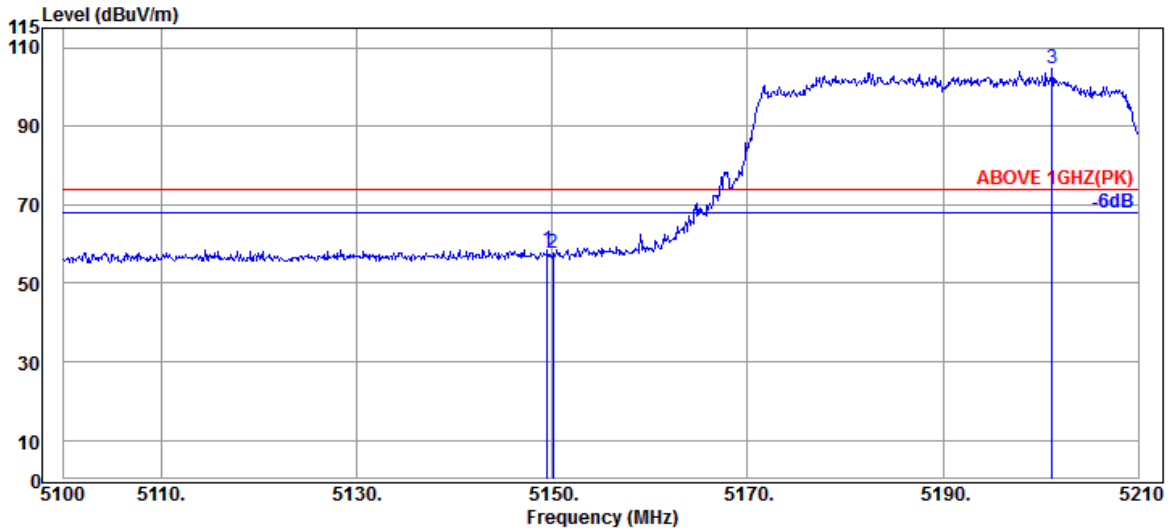

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	49.89	58.66	74.00	15.34	Peak
5150.050	34.20	8.92	34.35	48.76	57.53	74.00	16.47	Peak
@ 5201.200	34.20	8.96	34.33	95.75	104.58	---	---	Peak

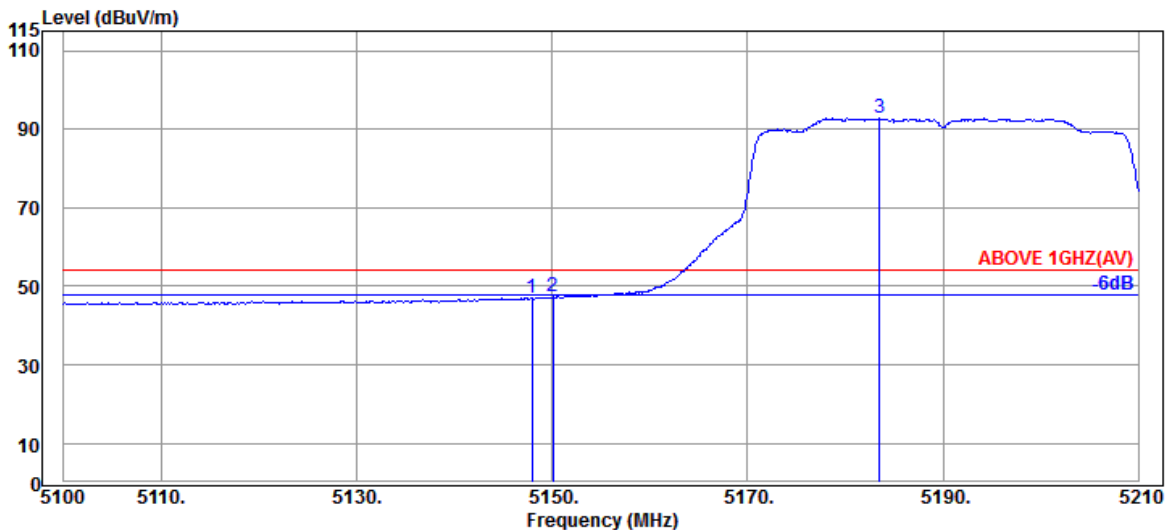


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.960	34.20	8.92	34.35	38.40	47.17	54.00	6.83	Average
5150.050	34.20	8.92	34.35	38.50	47.27	54.00	6.73	Average
@ 5183.490	34.20	8.95	34.34	83.97	92.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

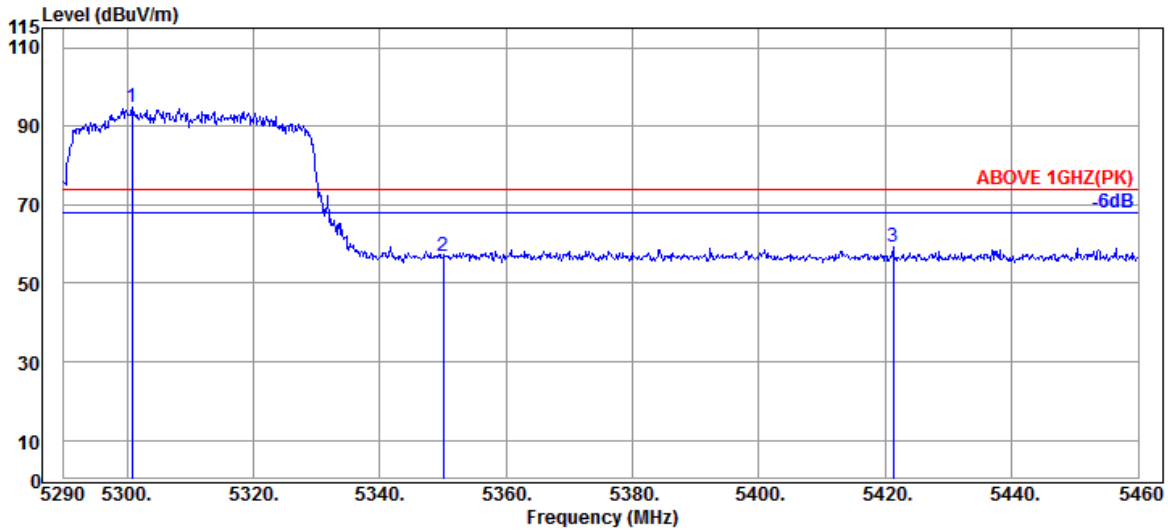

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.880	34.50	9.05	34.29	85.46	94.72	---	---	Peak
5350.010	34.60	9.10	34.27	47.40	56.83	74.00	17.17	Peak
5421.240	34.60	9.15	34.26	49.68	59.17	74.00	14.83	Peak

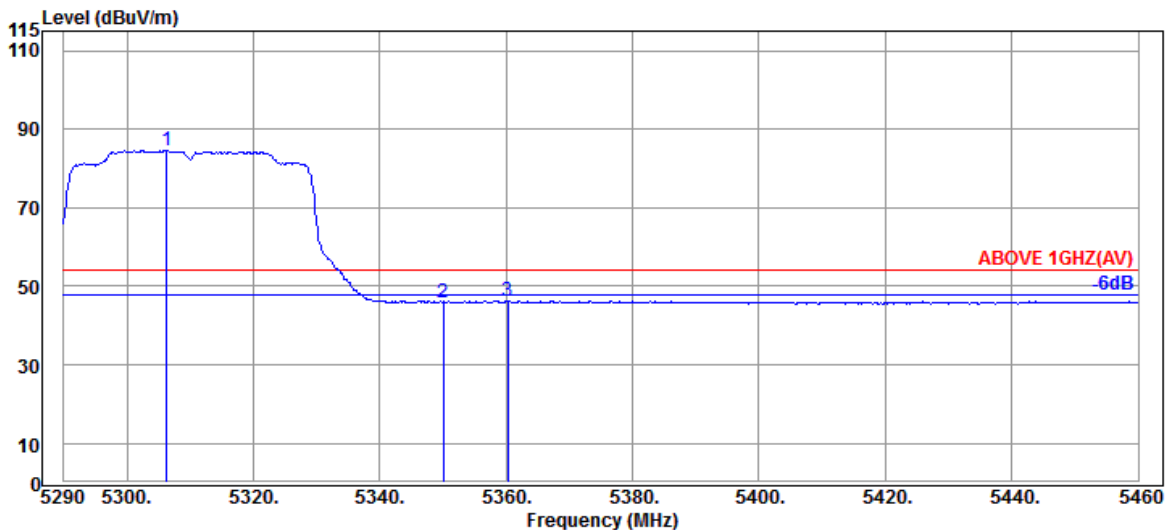


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.320	34.50	9.05	34.29	75.29	84.55	---	---	Average
5350.010	34.60	9.10	34.27	36.48	45.91	54.00	8.09	Average
5360.210	34.63	9.10	34.27	36.80	46.26	54.00	7.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

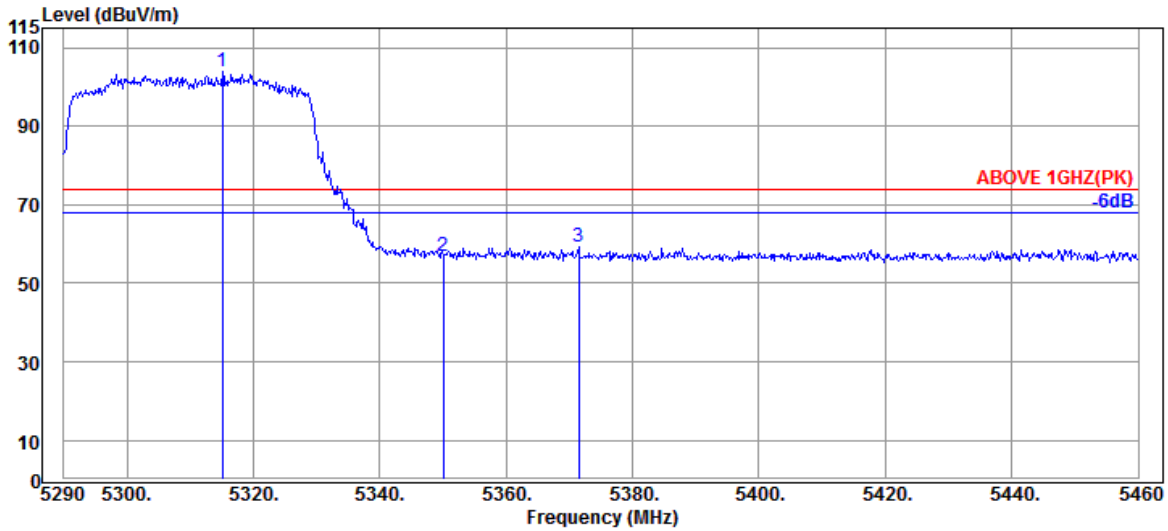

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.160	34.53	9.07	34.29	94.67	103.98	---	---	Peak
5350.010	34.60	9.10	34.27	47.50	56.93	74.00	17.07	Peak
5371.430	34.67	9.11	34.27	49.63	59.14	74.00	14.86	Peak

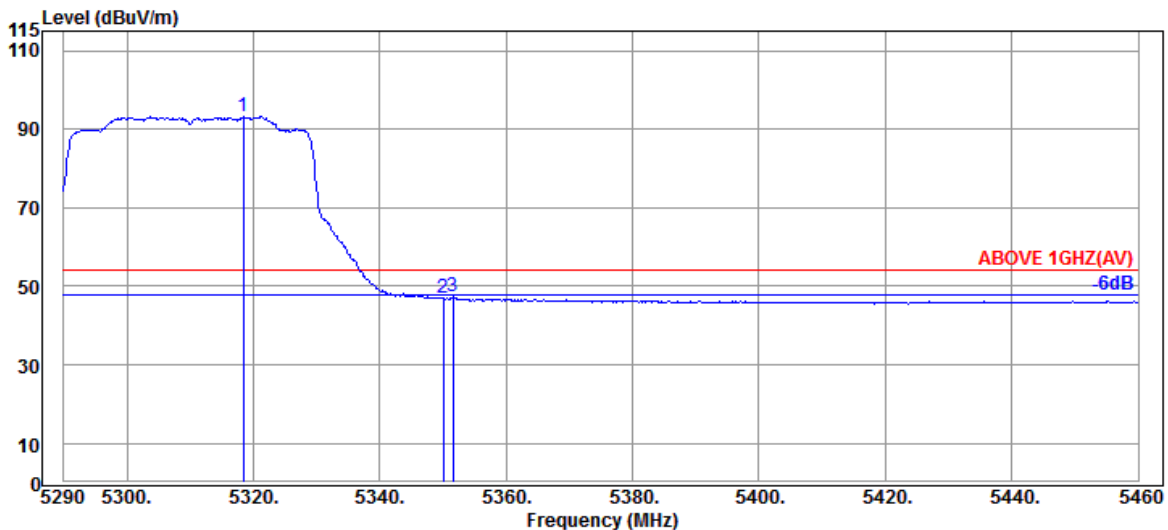


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.390	34.53	9.07	34.29	83.91	93.22	---	---	Average
5350.010	34.60	9.10	34.27	37.49	46.92	54.00	7.08	Average
5351.540	34.60	9.10	34.27	37.80	47.23	54.00	6.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

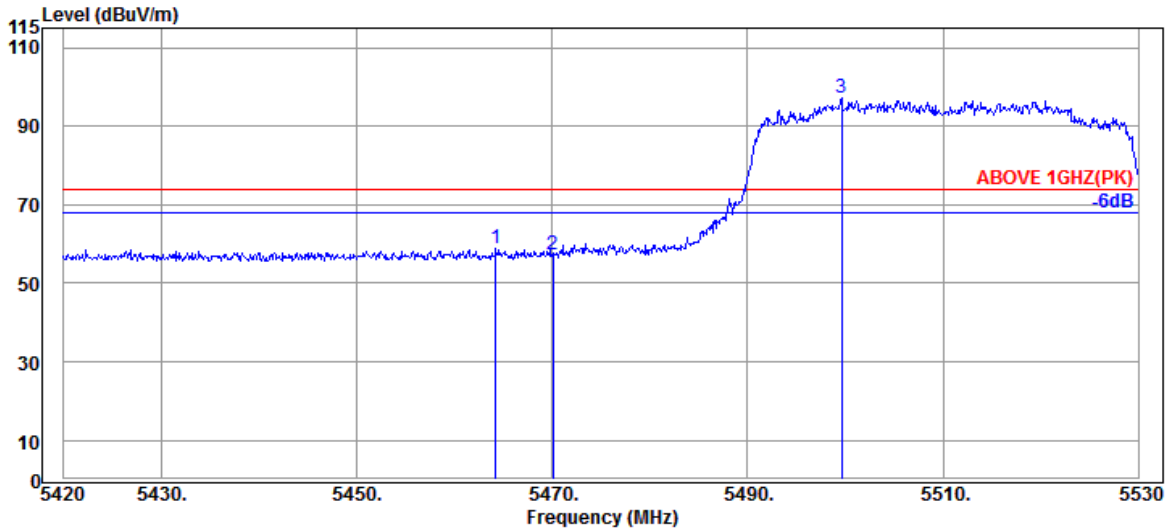

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.220	34.47	9.20	34.24	49.27	58.70	74.00	15.30	Peak
5470.050	34.47	9.20	34.24	47.76	57.19	74.00	16.81	Peak
@ 5499.640	34.40	9.23	34.23	87.97	97.37	---	---	Peak

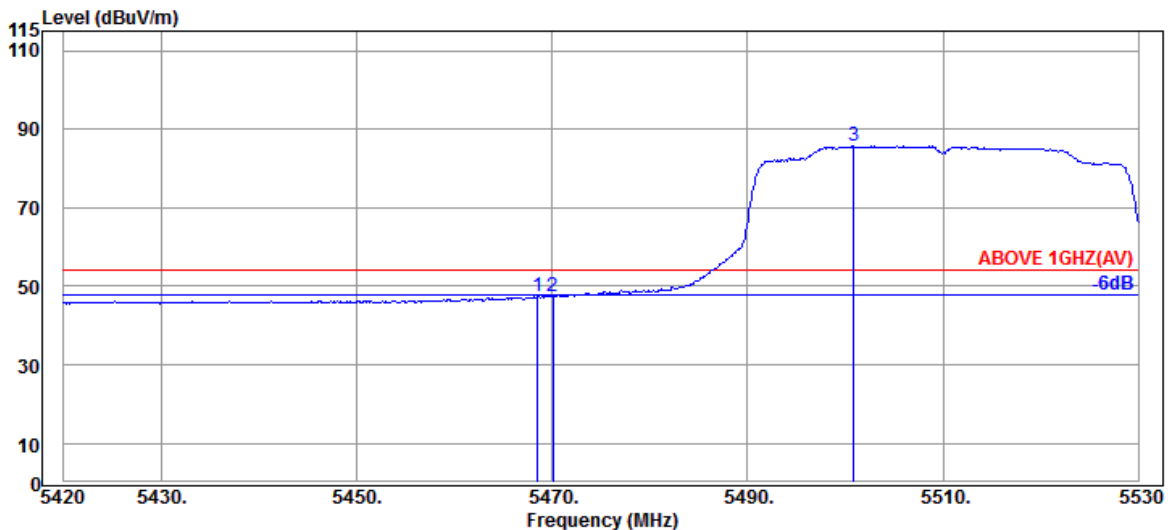


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.510	34.47	9.20	34.24	38.11	47.54	54.00	6.46	Average
5470.050	34.47	9.20	34.24	37.93	47.36	54.00	6.64	Average
@ 5500.850	34.40	9.23	34.24	76.36	85.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

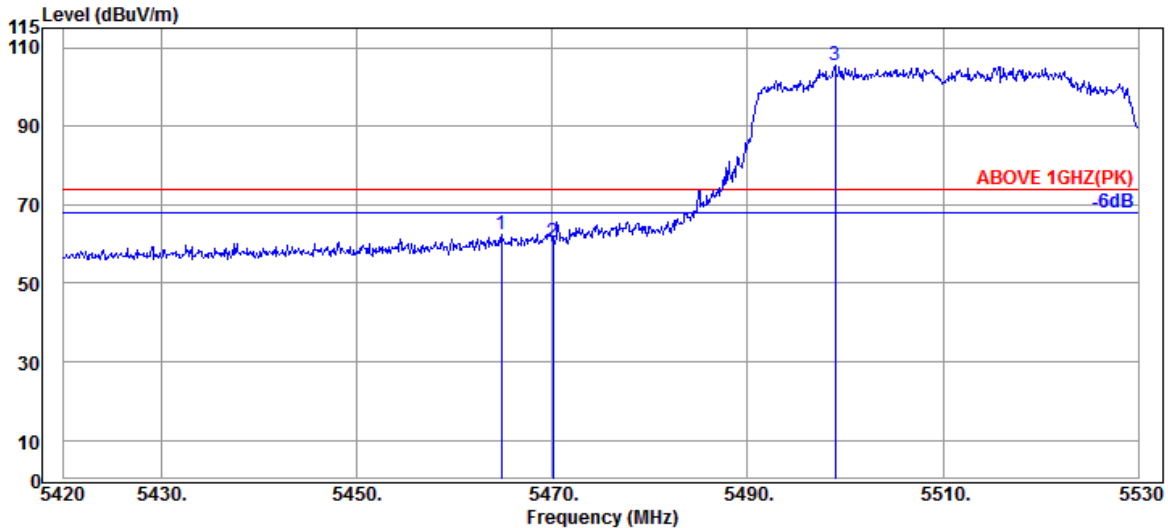

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.770	34.47	9.20	34.24	53.13	62.56	74.00	11.44	Peak
5470.050	34.47	9.20	34.24	51.03	60.46	74.00	13.54	Peak
@ 5498.980	34.40	9.23	34.23	95.98	105.38	---	---	Peak

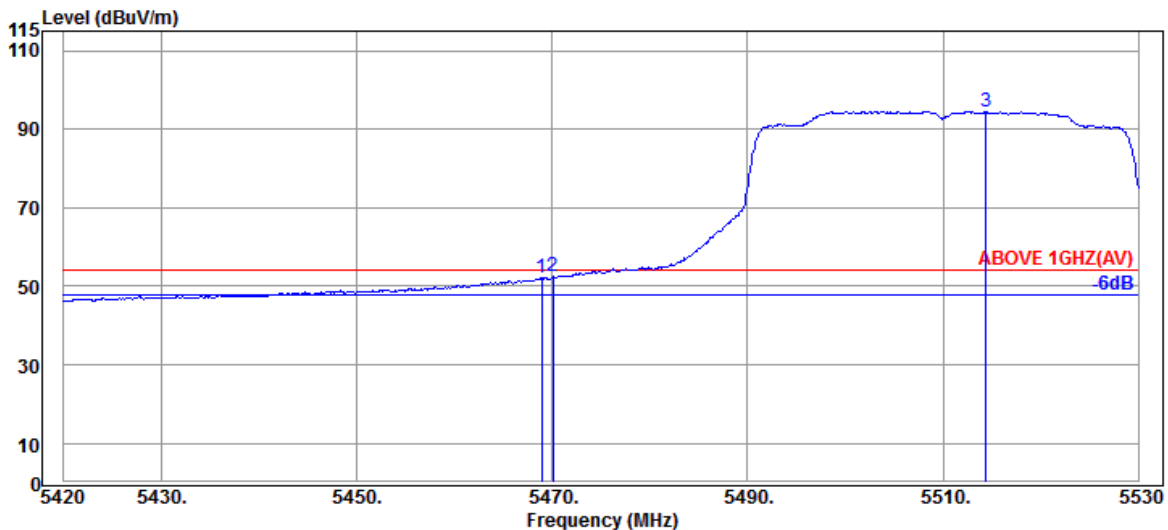


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	9.20	34.24	42.78	52.21	54.00	1.79	Average
5470.050	34.47	9.20	34.24	43.03	52.46	54.00	1.54	Average
@ 5514.380	34.37	9.24	34.24	85.26	94.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

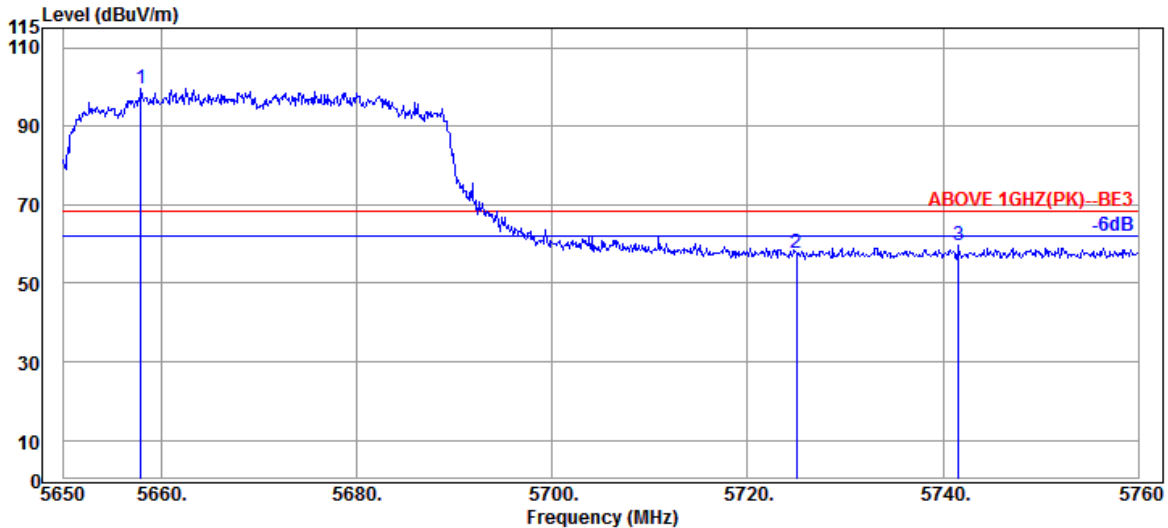

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.920	34.40	9.36	34.30	90.21	99.67	---	---	Peak
5725.020	34.67	9.42	34.32	47.87	57.64	68.20	10.56	Peak
5741.630	34.80	9.43	34.33	49.83	59.73	68.20	8.47	Peak

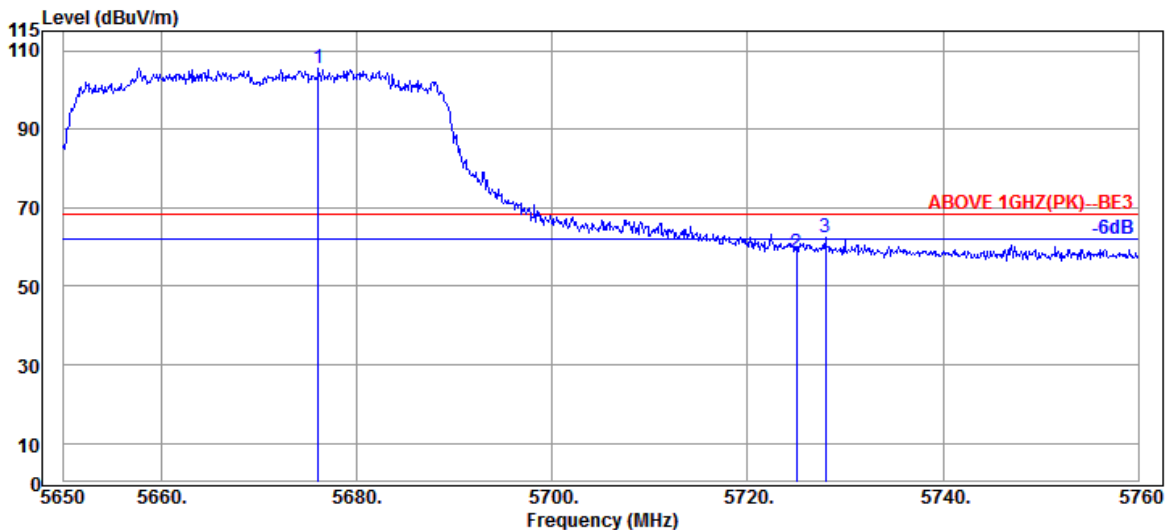


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.070	34.40	9.37	34.30	96.06	105.53	---	---	Peak
5725.020	34.67	9.42	34.32	48.58	58.35	68.20	9.85	Peak
5727.990	34.67	9.42	34.32	52.53	62.30	68.20	5.90	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

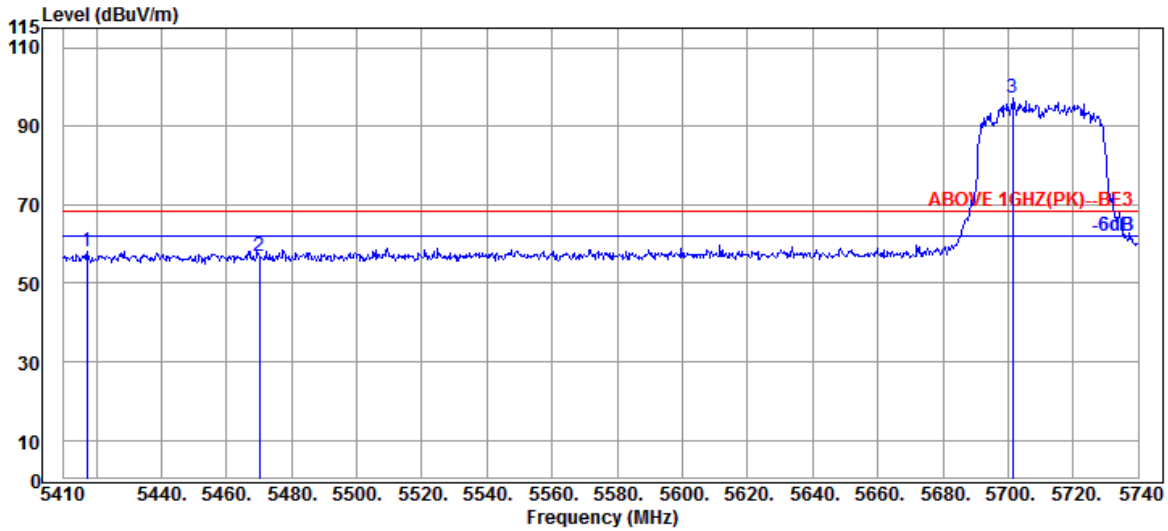

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.260	34.60	9.15	34.26	48.61	58.10	68.20	10.10	Peak
5470.060	34.47	9.20	34.24	47.33	56.76	68.20	11.44	Peak
@ 5701.390	34.40	9.40	34.31	87.69	97.18	---	---	Peak

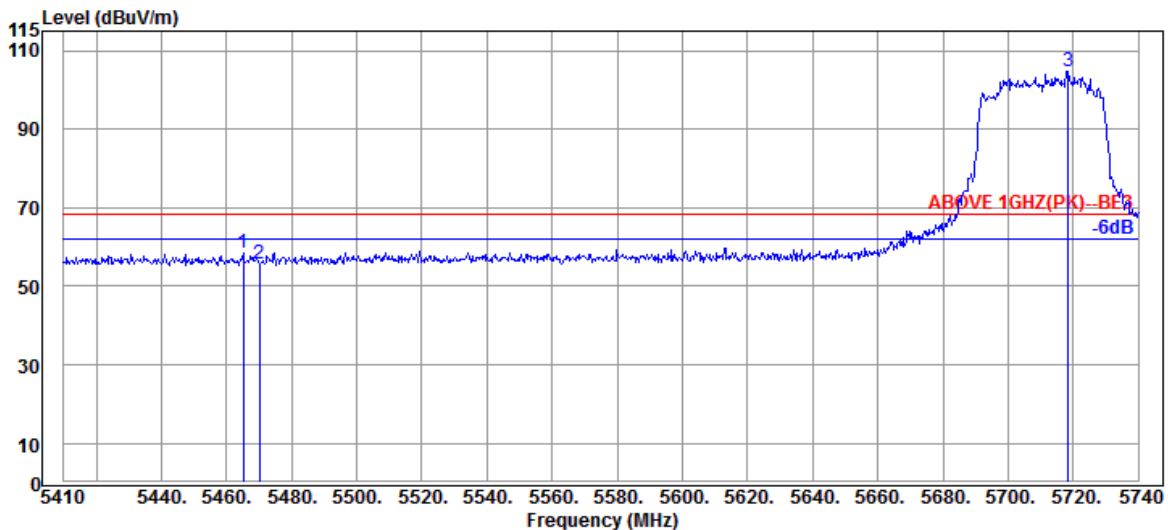


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.47	9.20	34.24	49.05	58.48	68.20	9.72	Peak
5470.060	34.47	9.20	34.24	46.23	55.66	68.20	12.54	Peak
@ 5718.550	34.53	9.42	34.32	95.20	104.83	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

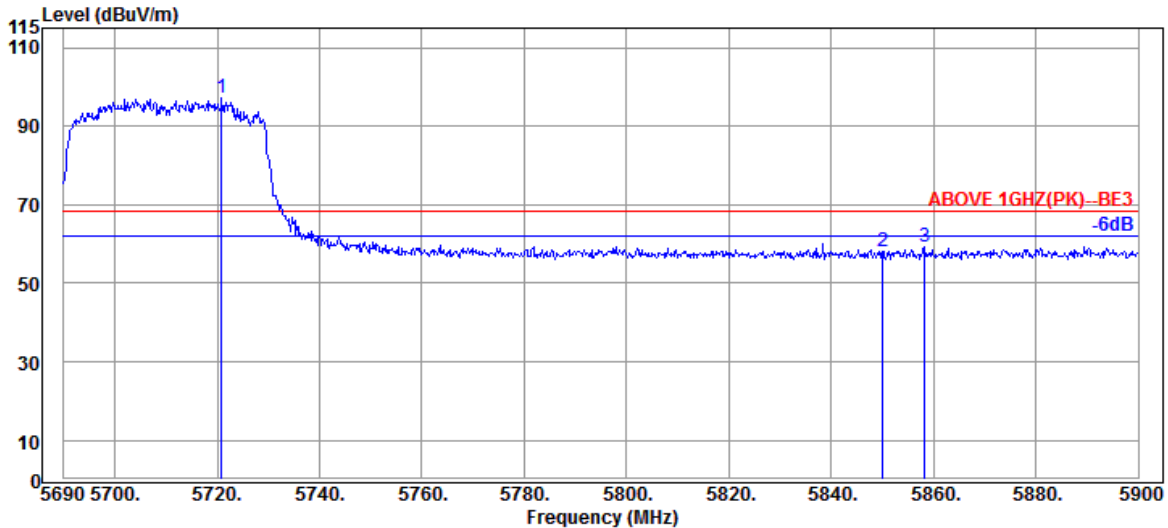

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.870	34.53	9.42	34.32	87.41	97.04	---	---	Peak
5850.020	35.10	9.52	34.38	47.89	58.13	68.20	10.07	Peak
5858.210	35.20	9.53	34.39	49.13	59.47	68.20	8.73	Peak

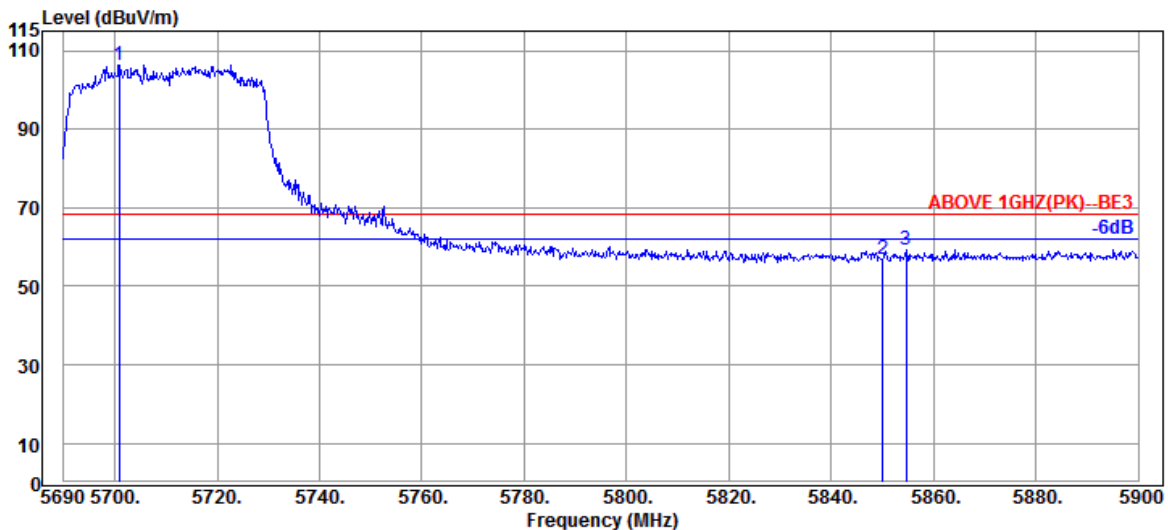


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.920	34.40	9.40	34.31	96.93	106.42	---	---	Peak
5850.020	35.10	9.52	34.38	46.76	57.00	68.20	11.20	Peak
5854.640	35.10	9.53	34.38	49.19	59.44	68.20	8.76	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

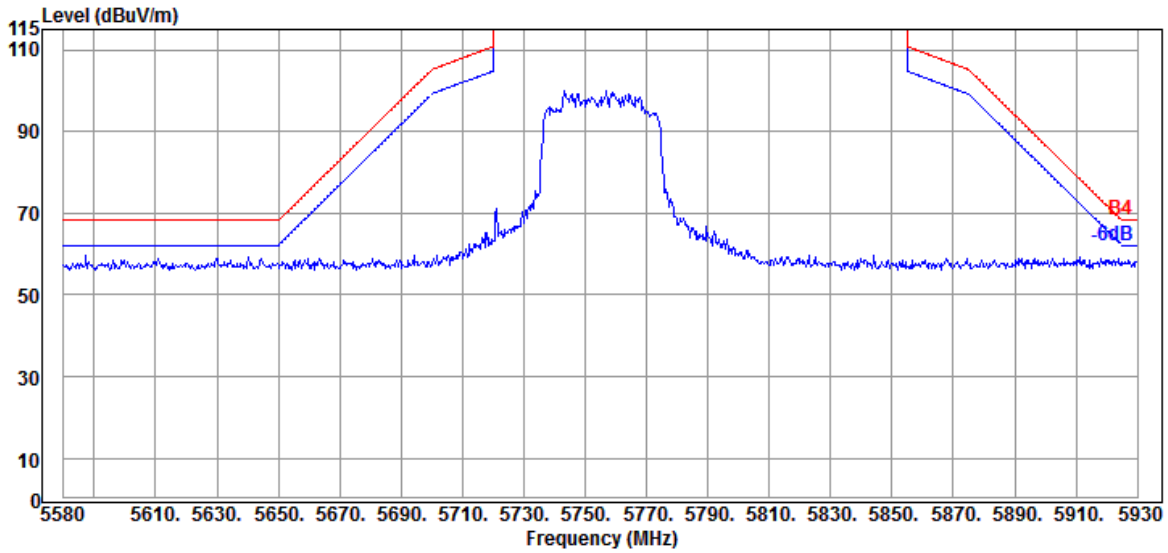


Antenna at Vertical Polarization

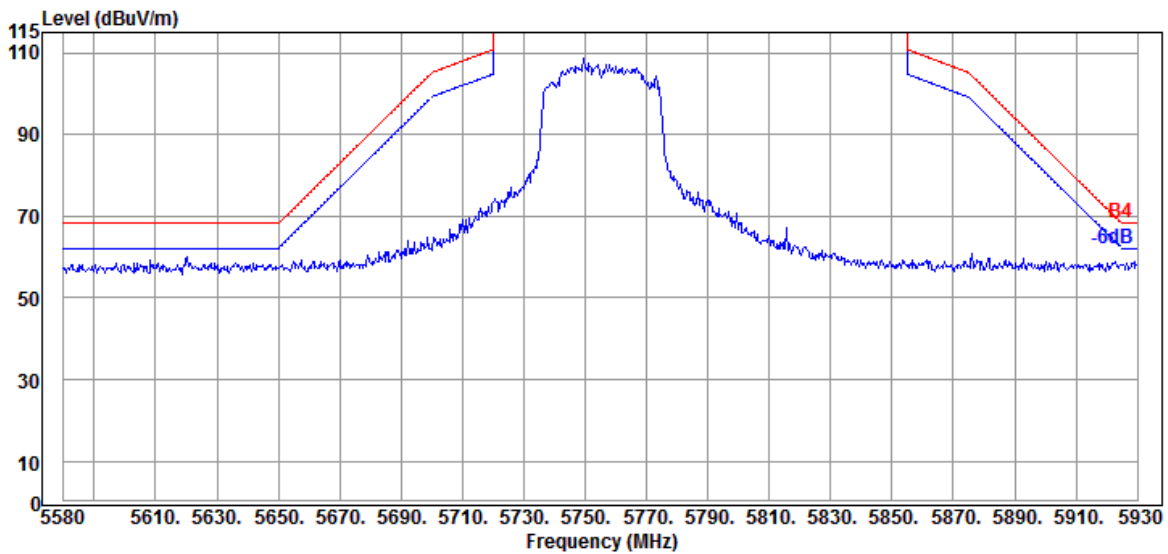


Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

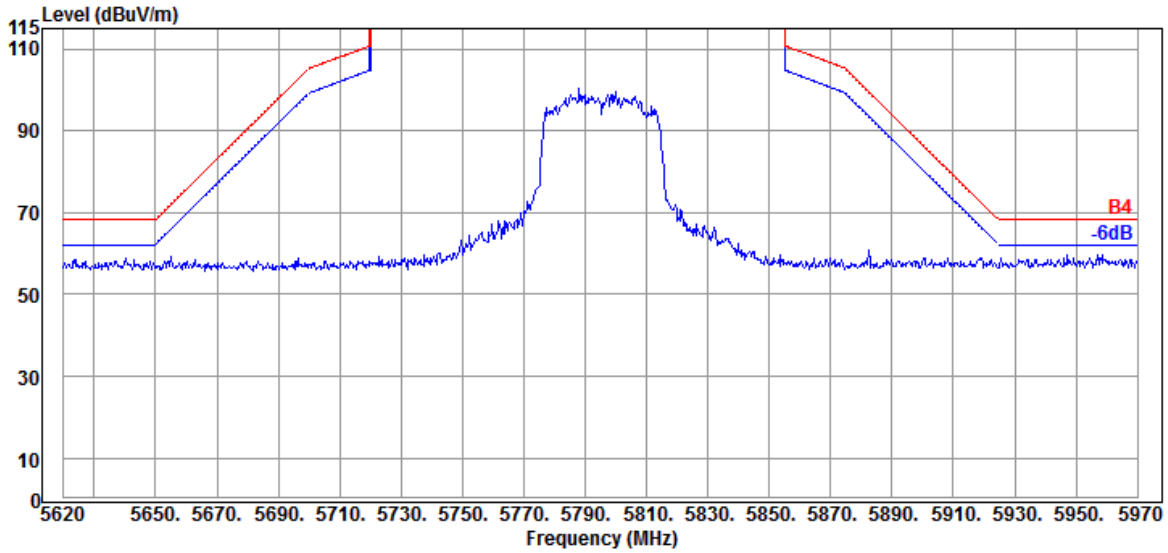

Antenna at Vertical Polarization

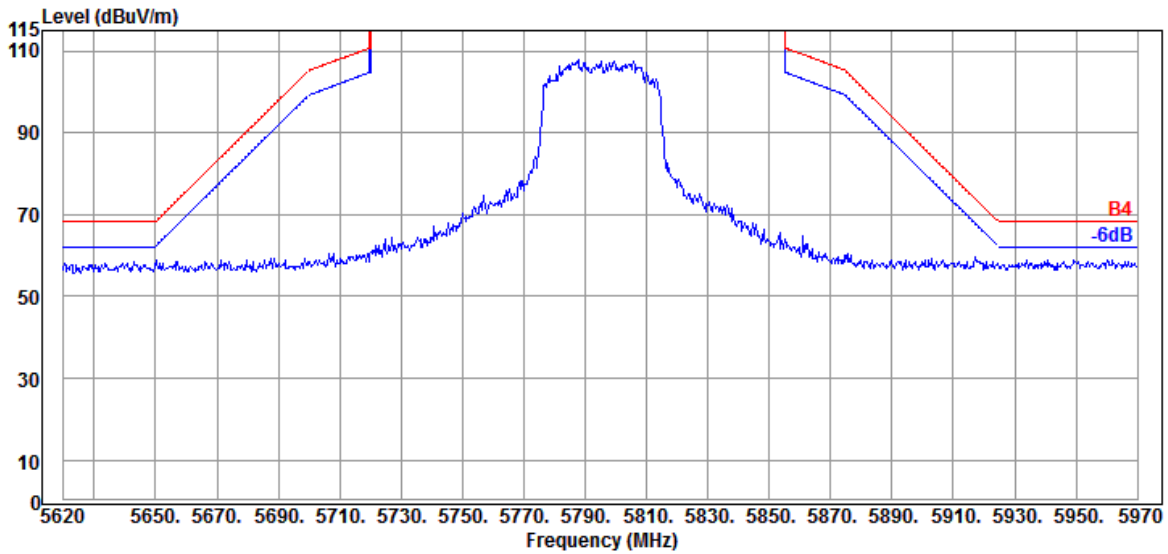


Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

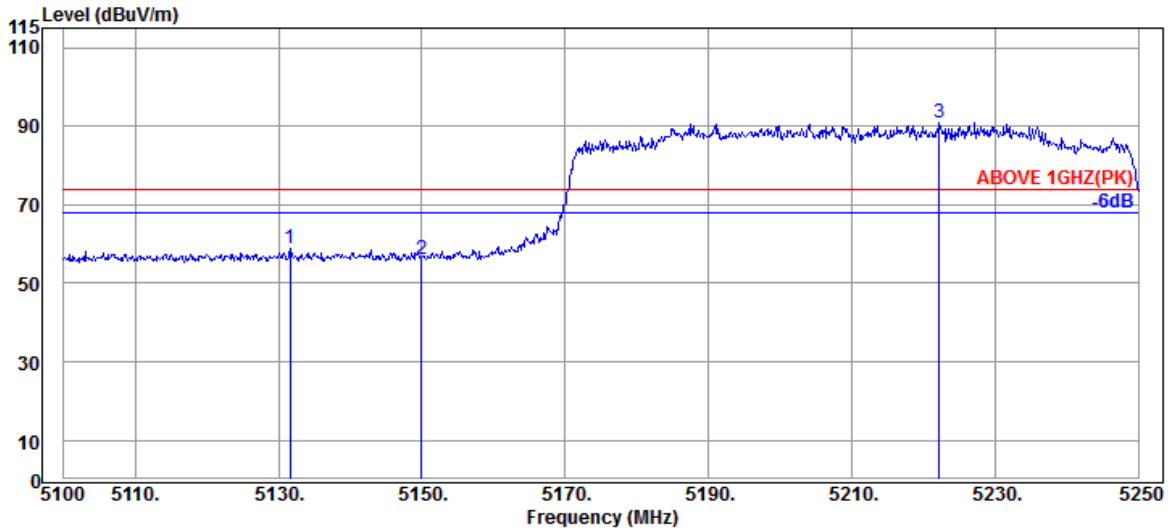

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.650	34.17	8.91	34.36	49.99	58.71	74.00	15.29	Peak
5149.950	34.20	8.92	34.35	47.52	56.29	74.00	17.71	Peak
@ 5222.250	34.30	8.98	34.32	81.86	90.82	---	---	Peak

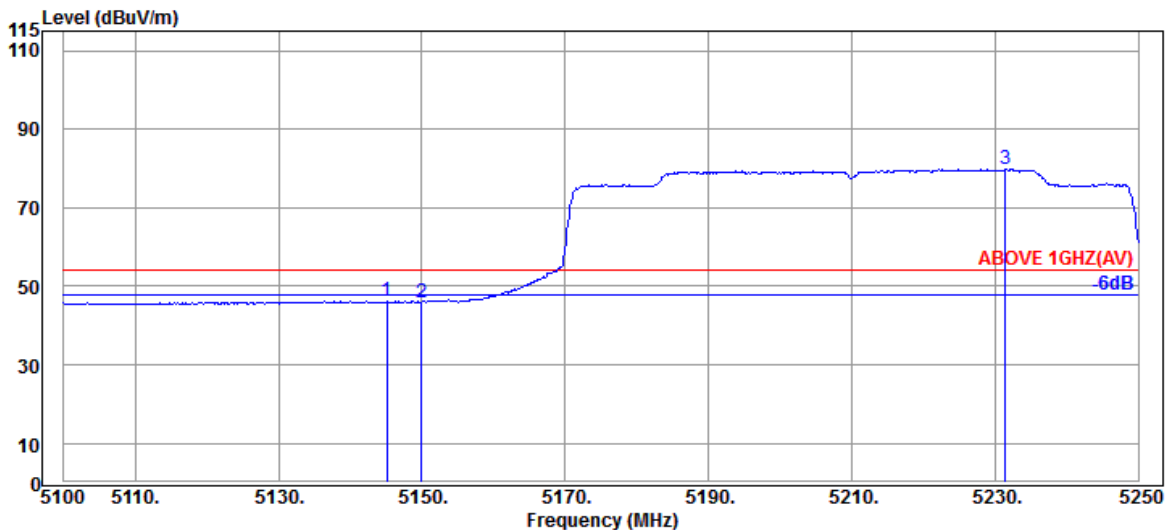


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.150	34.20	8.92	34.35	37.49	46.26	54.00	7.74	Average
5149.950	34.20	8.92	34.35	37.22	45.99	54.00	8.01	Average
@ 5231.400	34.30	8.99	34.32	70.83	79.80	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

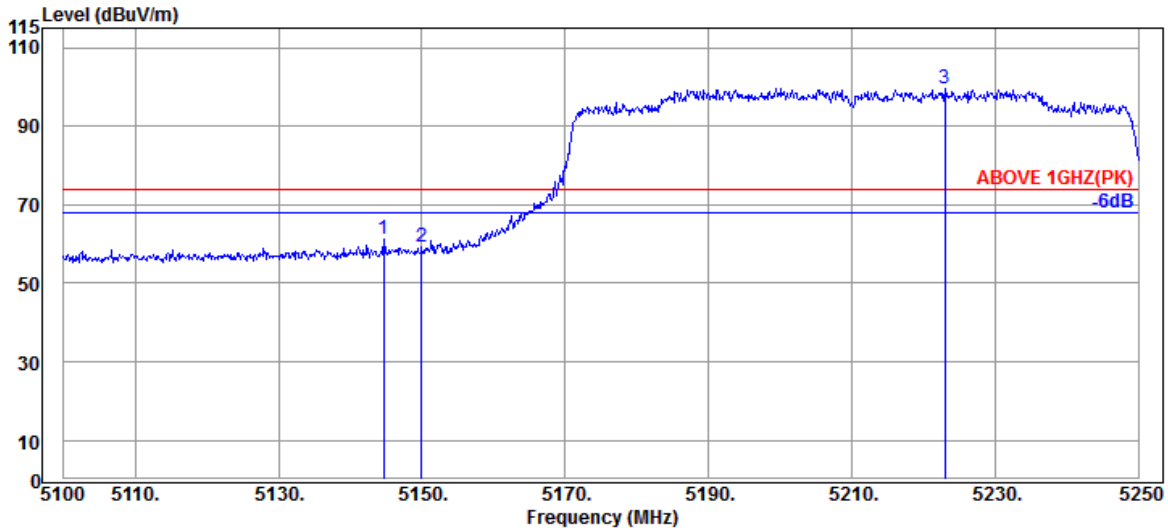

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	34.20	8.92	34.35	52.53	61.30	74.00	12.70	Peak
5149.950	34.20	8.92	34.35	50.33	59.10	74.00	14.90	Peak
@ 5223.000	34.30	8.98	34.32	90.62	99.58	---	---	Peak

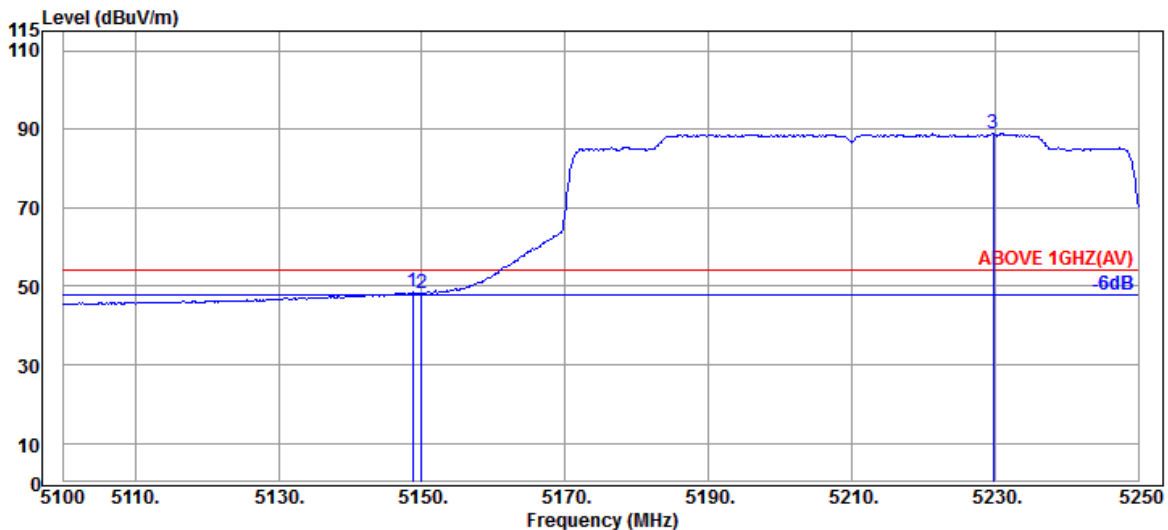


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.20	8.92	34.35	39.67	48.44	54.00	5.56	Average
5149.950	34.20	8.92	34.35	39.37	48.14	54.00	5.86	Average
@ 5229.750	34.30	8.99	34.32	79.91	88.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

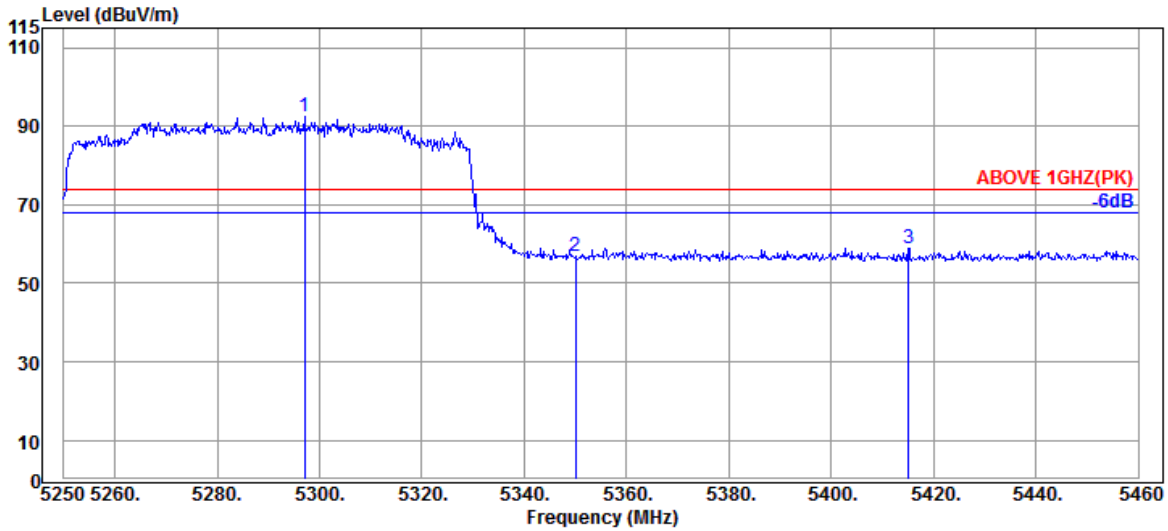

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.040	34.50	9.05	34.29	83.39	92.65	---	---	Peak
5349.960	34.60	9.10	34.27	47.36	56.79	74.00	17.21	Peak
5415.060	34.65	9.15	34.26	49.45	58.99	74.00	15.01	Peak

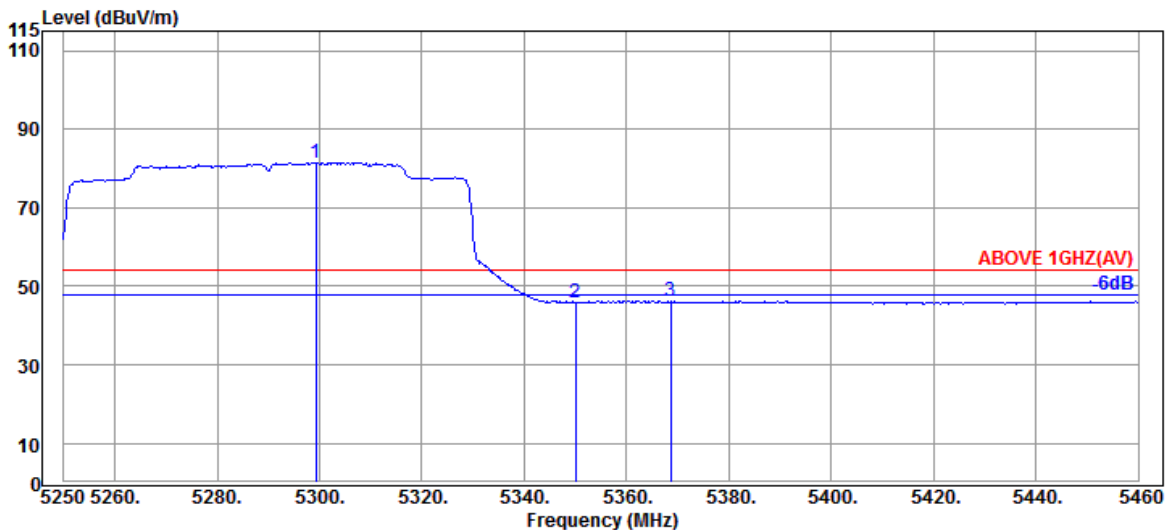


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.350	34.50	9.05	34.29	72.30	81.56	---	---	Average
5349.960	34.60	9.10	34.27	36.39	45.82	54.00	8.18	Average
5368.650	34.63	9.11	34.27	36.93	46.40	54.00	7.60	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

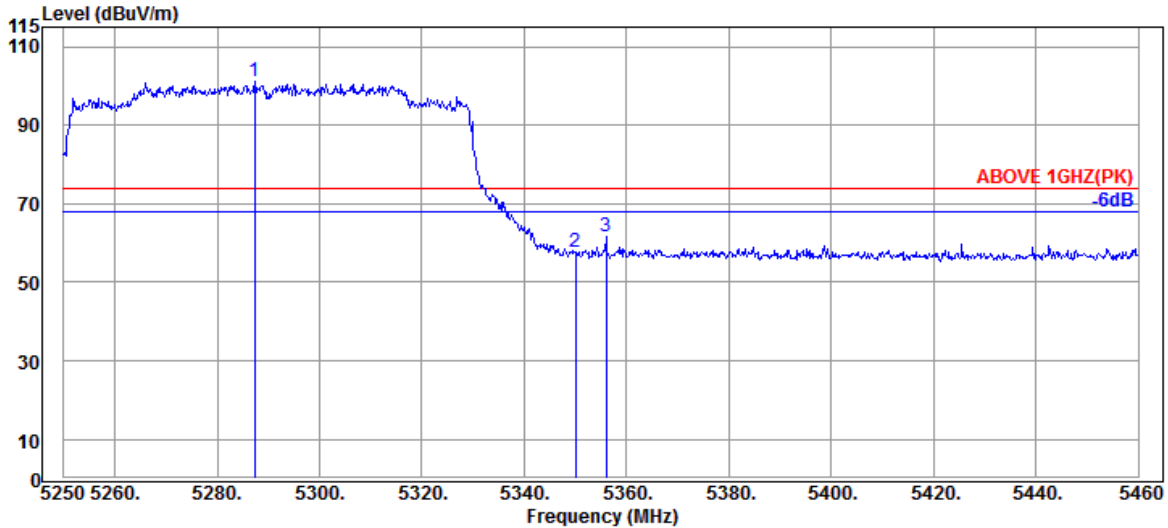

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5287.380	34.47	9.04	34.30	91.86	101.07	---	---	Peak
5349.960	34.60	9.10	34.27	48.28	57.71	74.00	16.29	Peak
5356.050	34.63	9.10	34.27	52.02	61.48	74.00	12.52	Peak

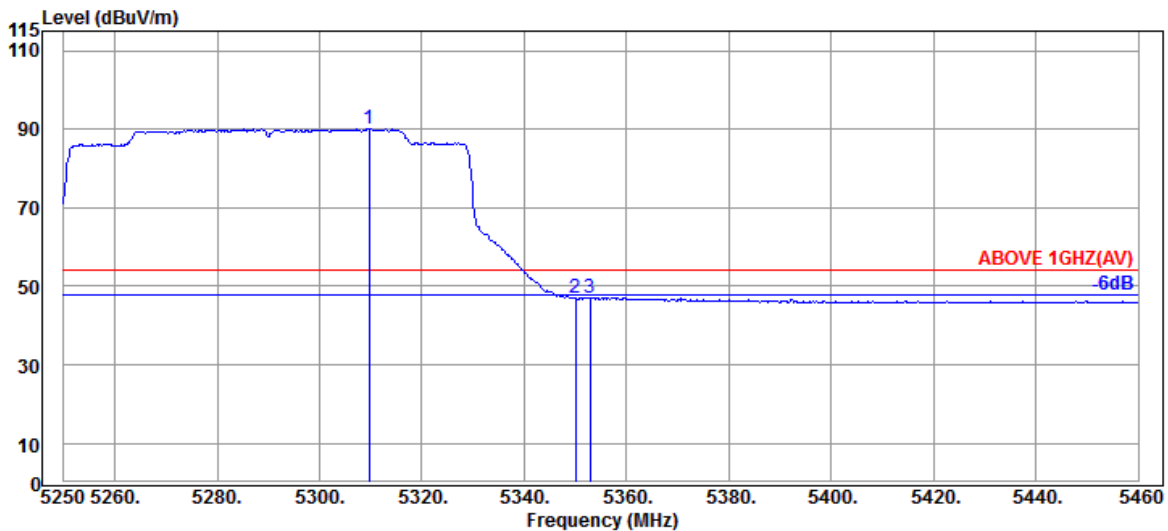


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5309.640	34.53	9.07	34.29	80.79	90.10	---	---	Average
5349.960	34.60	9.10	34.27	37.51	46.94	54.00	7.06	Average
5352.900	34.60	9.10	34.27	37.74	47.17	54.00	6.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

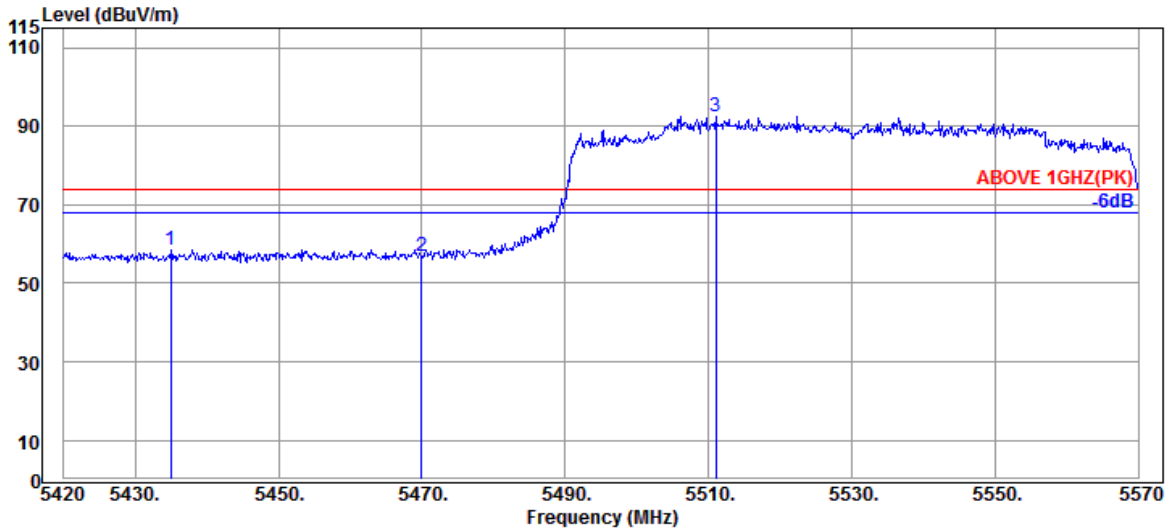

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.000	34.55	9.17	34.25	48.99	58.46	74.00	15.54	Peak
5469.950	34.47	9.20	34.24	47.50	56.93	74.00	17.07	Peak
@ 5511.050	34.40	9.23	34.24	83.13	92.52	---	---	Peak

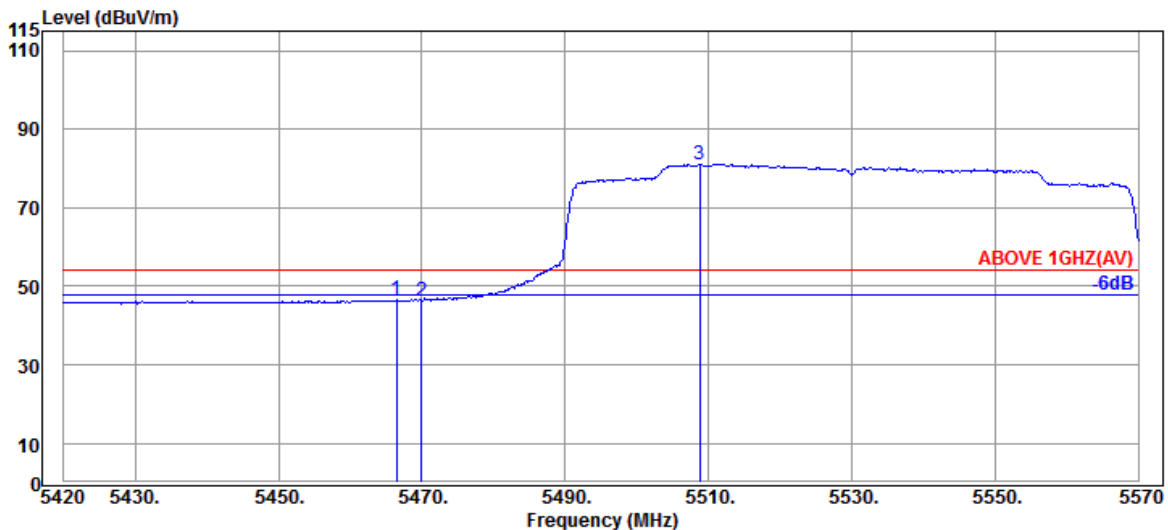


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.47	9.20	34.24	37.11	46.54	54.00	7.46	Average
5469.950	34.47	9.20	34.24	36.97	46.40	54.00	7.60	Average
@ 5508.800	34.40	9.23	34.24	71.68	81.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

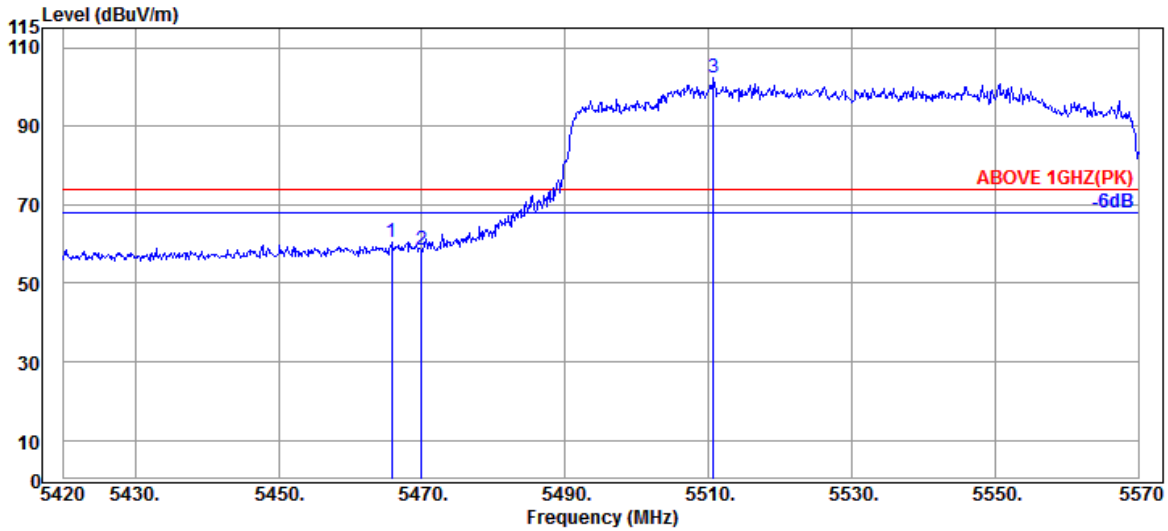

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.47	9.20	34.24	51.04	60.47	74.00	13.53	Peak
5469.950	34.47	9.20	34.24	49.25	58.68	74.00	15.32	Peak
@ 5510.750	34.40	9.23	34.24	92.90	102.29	---	---	Peak

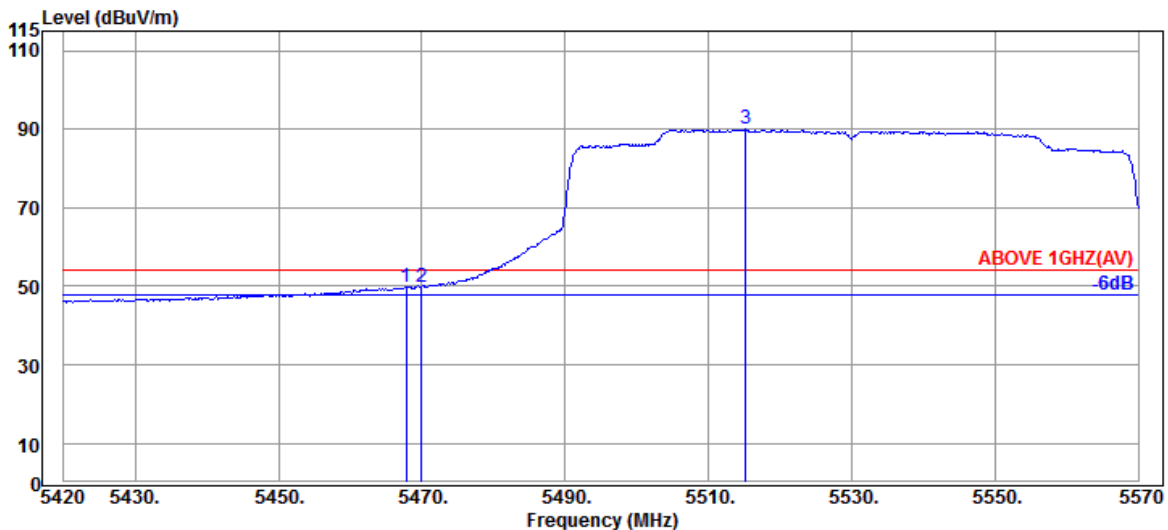


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.47	9.20	34.24	40.45	49.88	54.00	4.12	Average
5469.950	34.47	9.20	34.24	40.44	49.87	54.00	4.13	Average
@ 5515.250	34.37	9.24	34.24	80.54	89.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

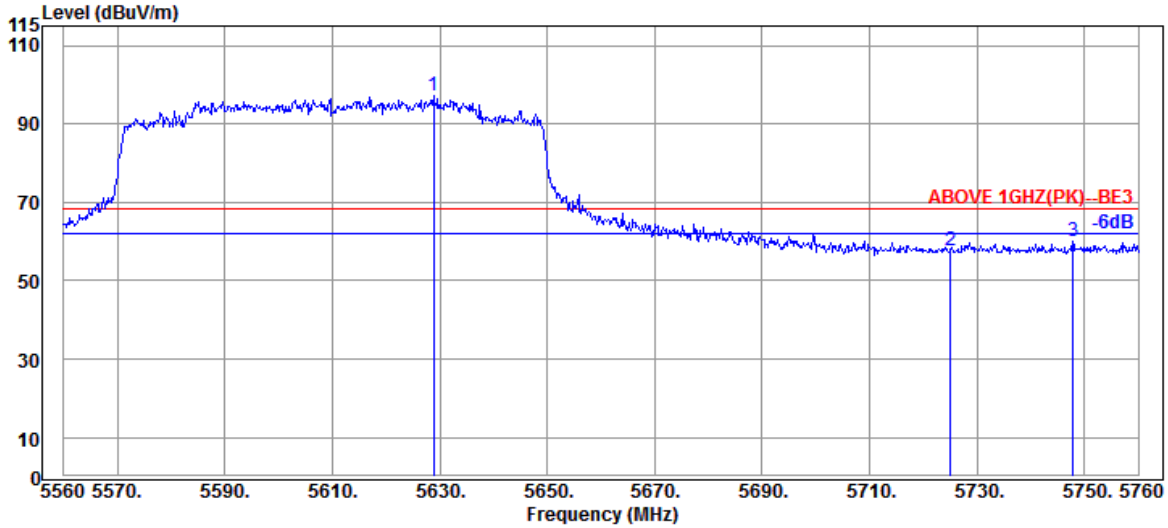

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5628.800	34.40	9.33	34.29	87.96	97.40	---	---	Peak
5725.000	34.67	9.42	34.32	48.07	57.84	68.20	10.36	Peak
5747.800	34.80	9.43	34.33	50.28	60.18	68.20	8.02	Peak

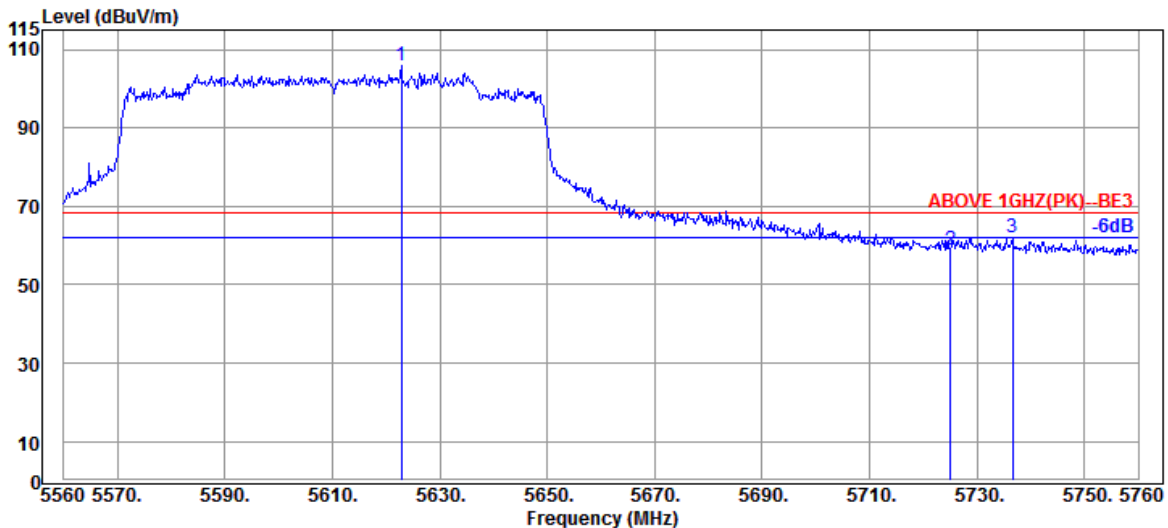


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.800	34.40	9.33	34.28	96.47	105.92	---	---	Peak
5725.000	34.67	9.42	34.32	49.18	58.95	68.20	9.25	Peak
5736.600	34.67	9.43	34.33	52.37	62.14	68.20	6.06	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

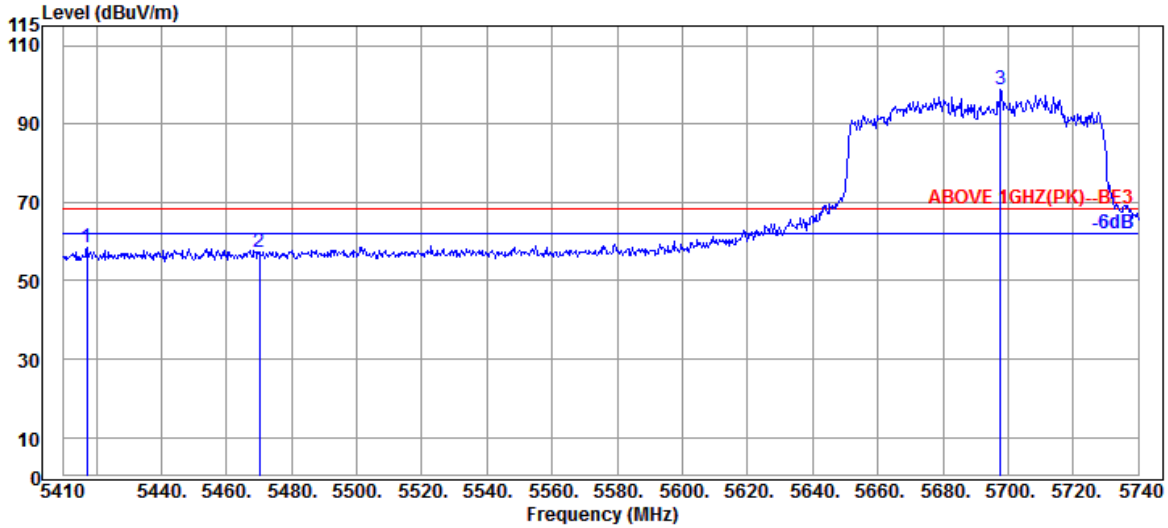

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.260	34.60	9.15	34.26	49.18	58.67	68.20	9.53	Peak
5470.060	34.47	9.20	34.24	47.76	57.19	68.20	11.01	Peak
@ 5697.760	34.40	9.39	34.31	89.33	98.81	---	---	Peak

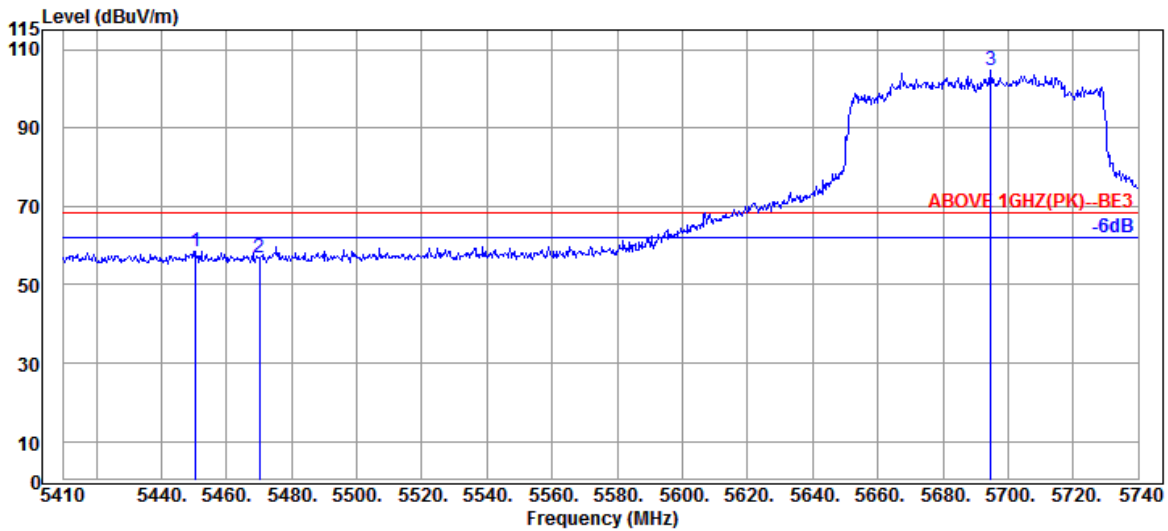


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.50	9.18	34.24	49.05	58.49	68.20	9.71	Peak
5470.060	34.47	9.20	34.24	47.53	56.96	68.20	11.24	Peak
@ 5694.790	34.40	9.39	34.31	95.10	104.58	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

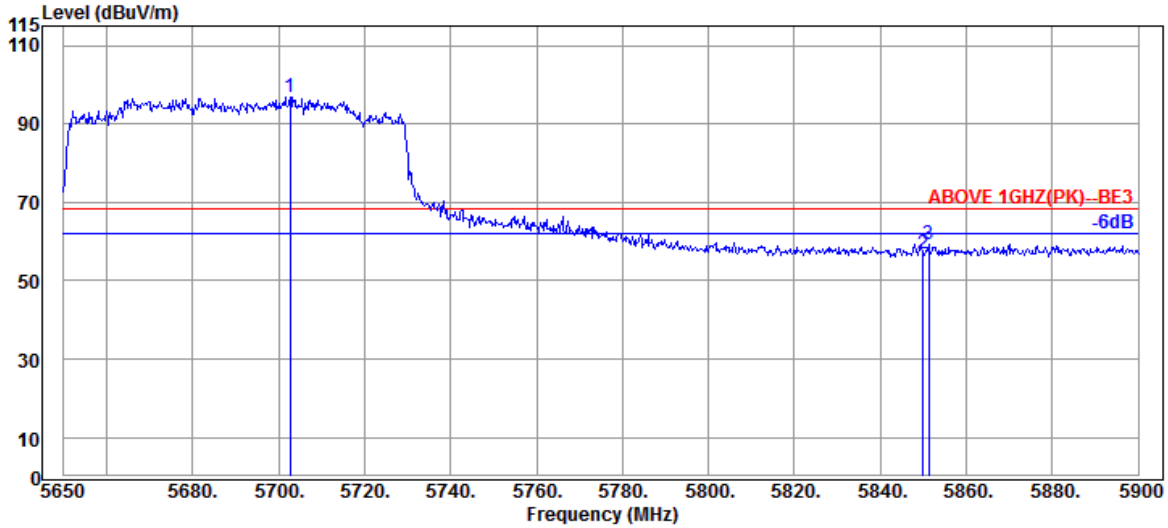

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.750	34.40	9.40	34.31	87.43	96.92	---	---	Peak
5850.000	35.10	9.52	34.38	46.68	56.92	68.20	11.28	Peak
5851.250	35.10	9.52	34.38	49.04	59.28	68.20	8.92	Peak

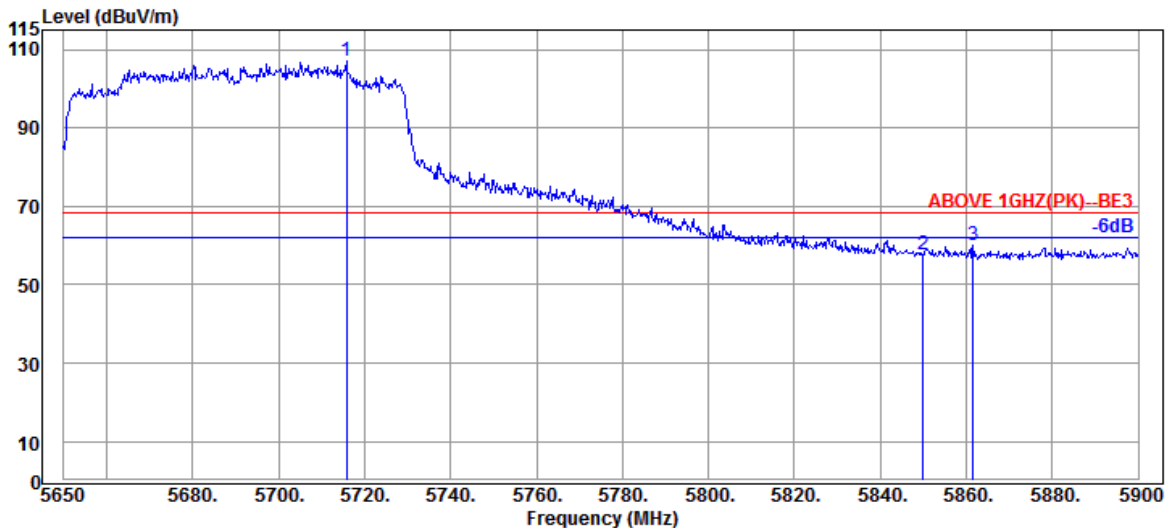


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.750	34.53	9.40	34.32	97.54	107.15	---	---	Peak
5850.000	35.10	9.52	34.38	47.43	57.67	68.20	10.53	Peak
5861.500	35.20	9.53	34.39	49.92	60.26	68.20	7.94	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

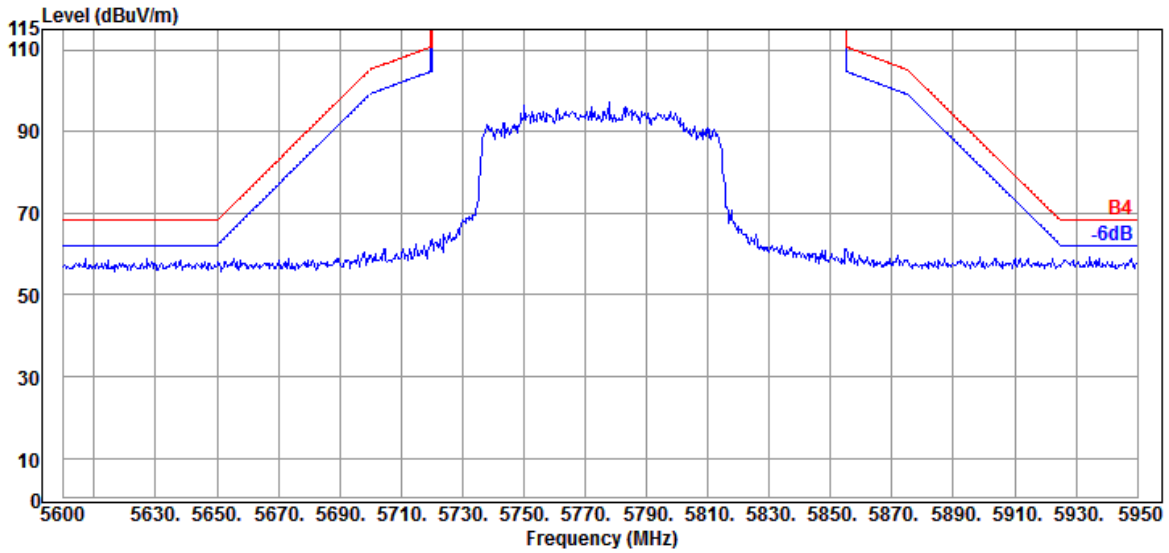

Antenna at Vertical Polarization

