



Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

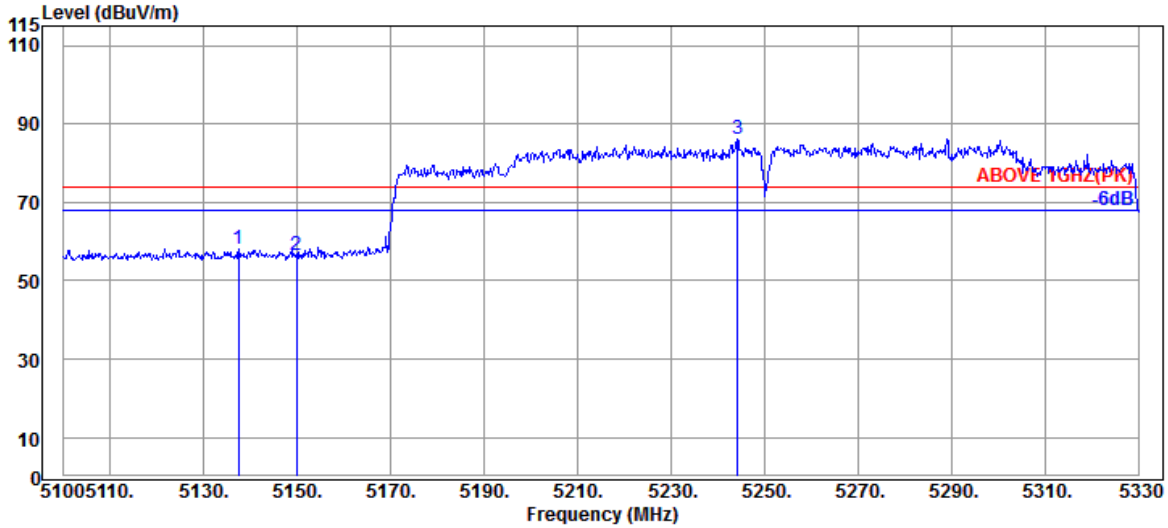

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.490	34.17	8.91	34.36	49.46	58.18	74.00	15.82	Peak
5149.910	34.20	8.92	34.35	47.77	56.54	74.00	17.46	Peak
@ 5244.210	34.35	9.01	34.32	77.05	86.09	---	---	Peak

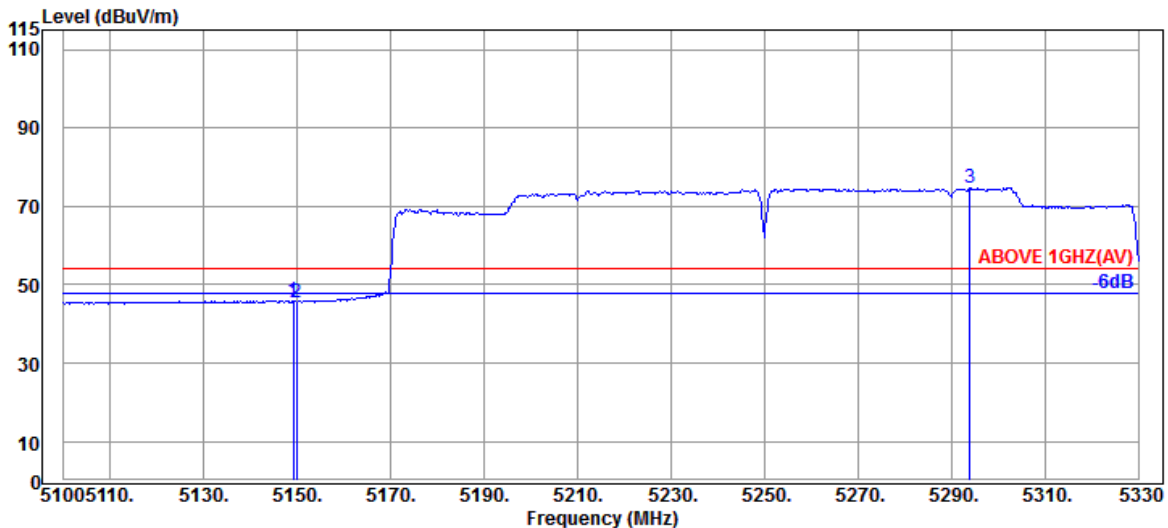


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.20	8.92	34.35	37.12	45.89	54.00	8.11	Average
5149.910	34.20	8.92	34.35	36.86	45.63	54.00	8.37	Average
@ 5293.890	34.50	9.05	34.30	65.42	74.67	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

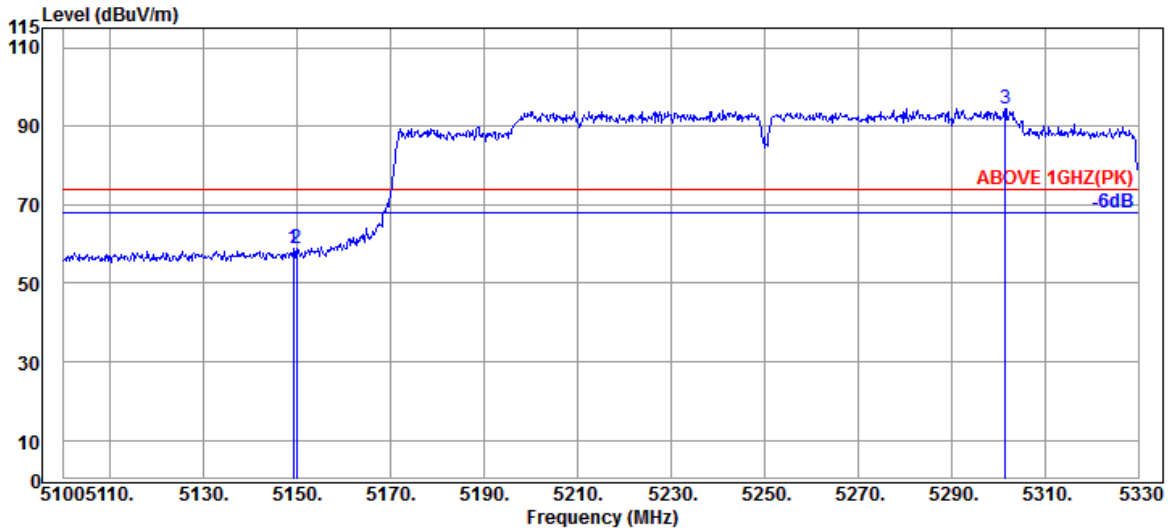

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.20	8.92	34.35	50.04	58.81	74.00	15.19	Peak
5149.910	34.20	8.92	34.35	50.10	58.87	74.00	15.13	Peak
@ 5301.480	34.50	9.05	34.29	85.32	94.58	---	---	Peak

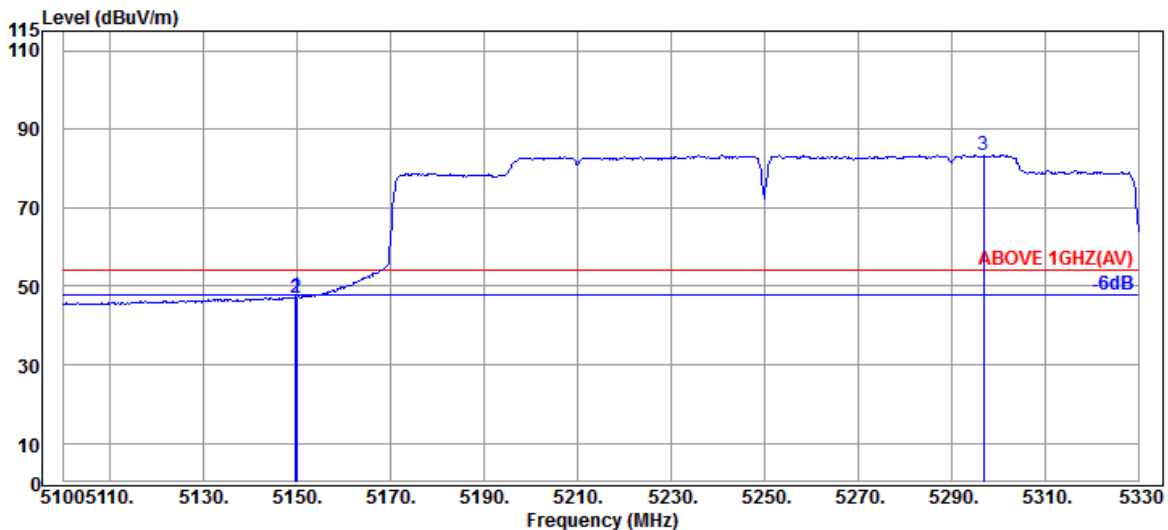


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	34.35	38.53	47.30	54.00	6.70	Average
5149.910	34.20	8.92	34.35	38.38	47.15	54.00	6.85	Average
@ 5296.880	34.50	9.05	34.29	74.14	83.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

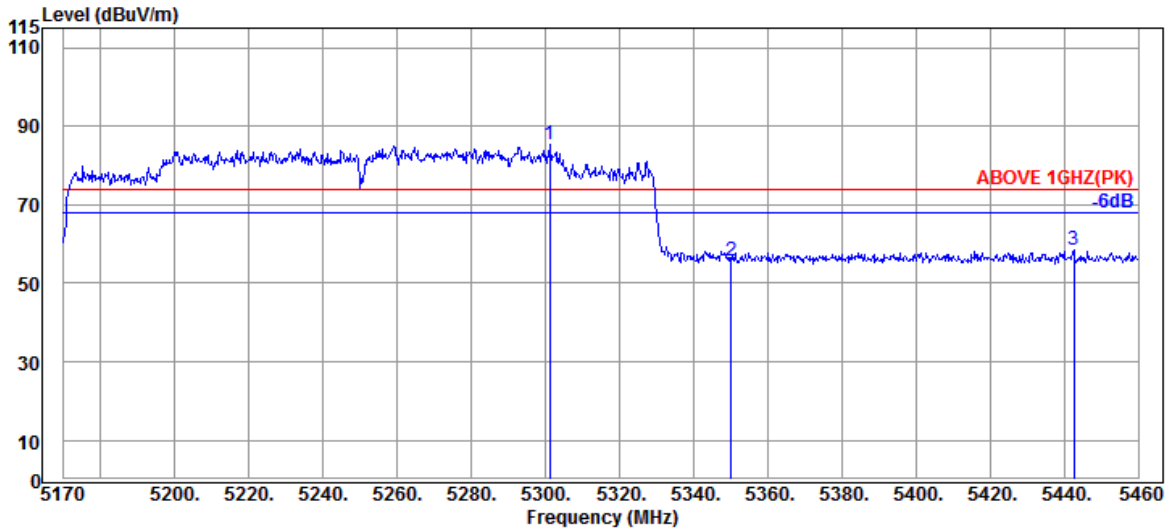

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.080	34.50	9.05	34.29	76.02	85.28	---	---	Peak
5350.090	34.60	9.10	34.27	46.36	55.79	74.00	18.21	Peak
5442.600	34.55	9.17	34.25	48.93	58.40	74.00	15.60	Peak

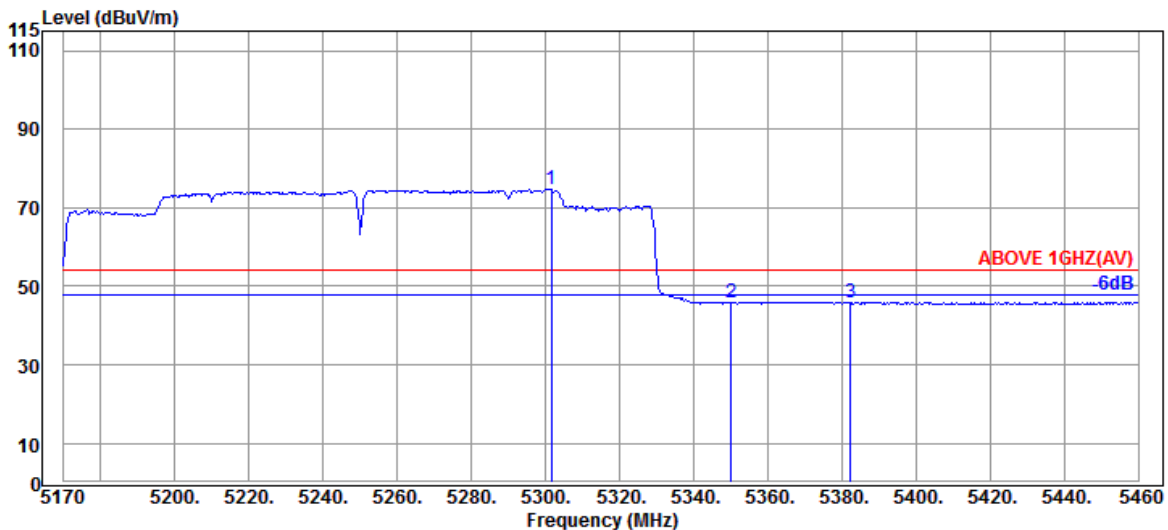


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.660	34.50	9.05	34.29	65.44	74.70	---	---	Average
5350.090	34.60	9.10	34.27	36.39	45.82	54.00	8.18	Average
5382.280	34.67	9.13	34.27	36.46	45.99	54.00	8.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

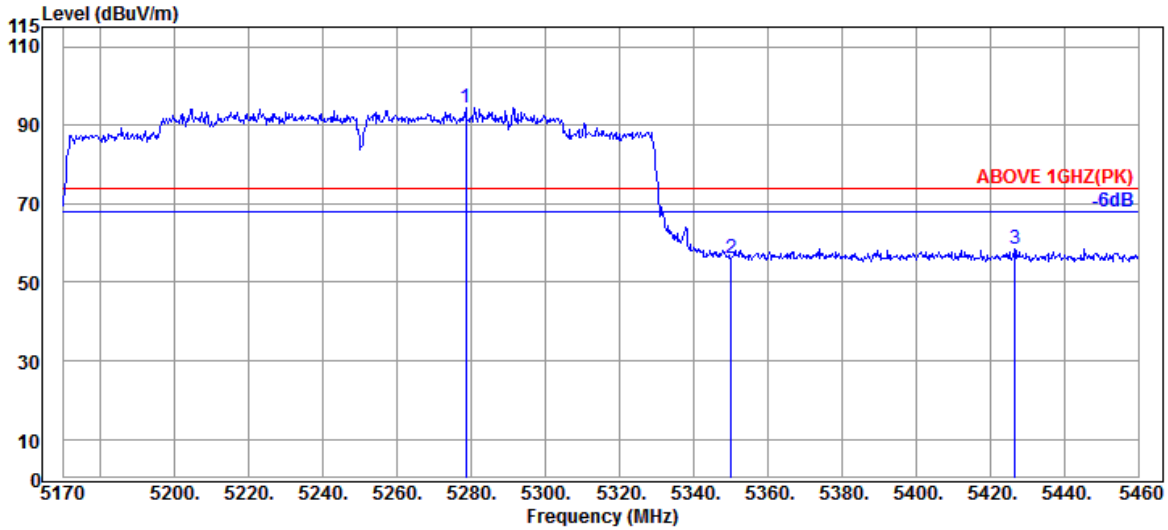

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.460	34.47	9.04	34.30	85.14	94.35	---	---	Peak
5350.090	34.60	9.10	34.27	46.67	56.10	74.00	17.90	Peak
5426.650	34.60	9.15	34.25	49.05	58.55	74.00	15.45	Peak

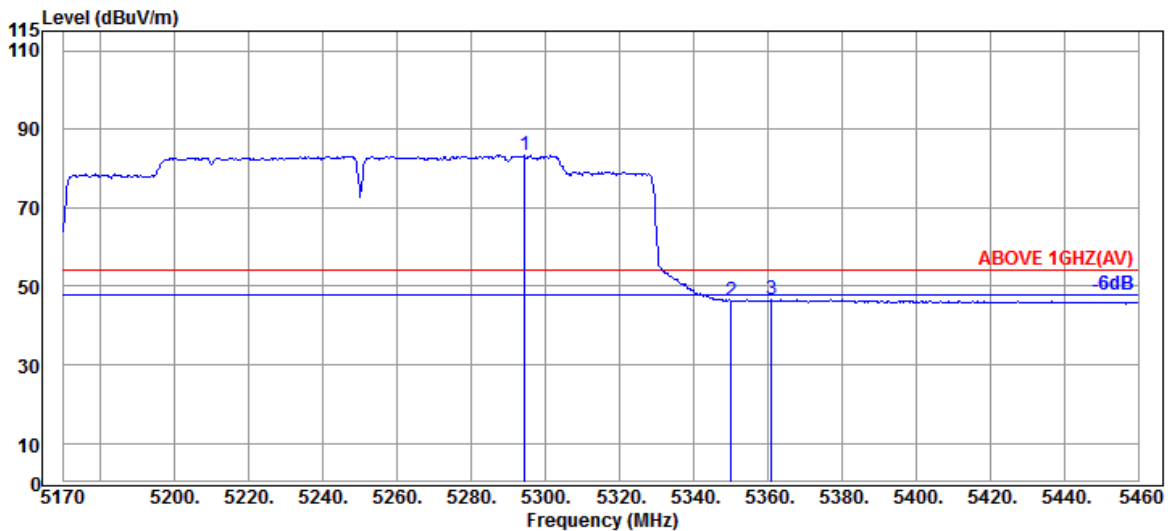


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.410	34.50	9.05	34.30	74.14	83.39	---	---	Average
5350.090	34.60	9.10	34.27	36.86	46.29	54.00	7.71	Average
5361.110	34.63	9.11	34.27	37.10	46.57	54.00	7.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

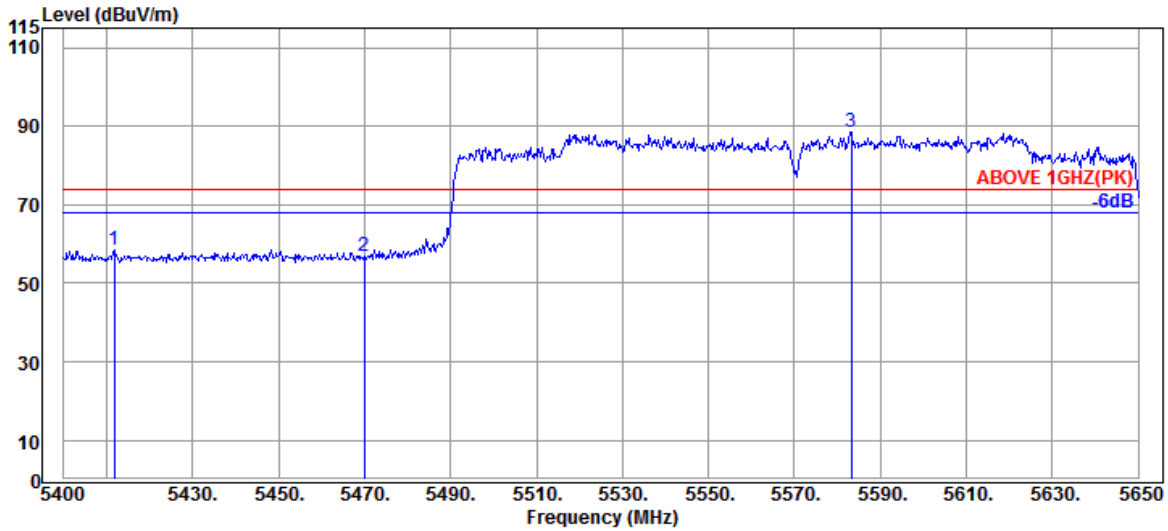

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.750	34.65	9.15	34.26	49.04	58.58	74.00	15.42	Peak
5470.000	34.47	9.20	34.24	47.39	56.82	74.00	17.18	Peak
@ 5583.250	34.37	9.30	34.27	78.96	88.36	---	---	Peak

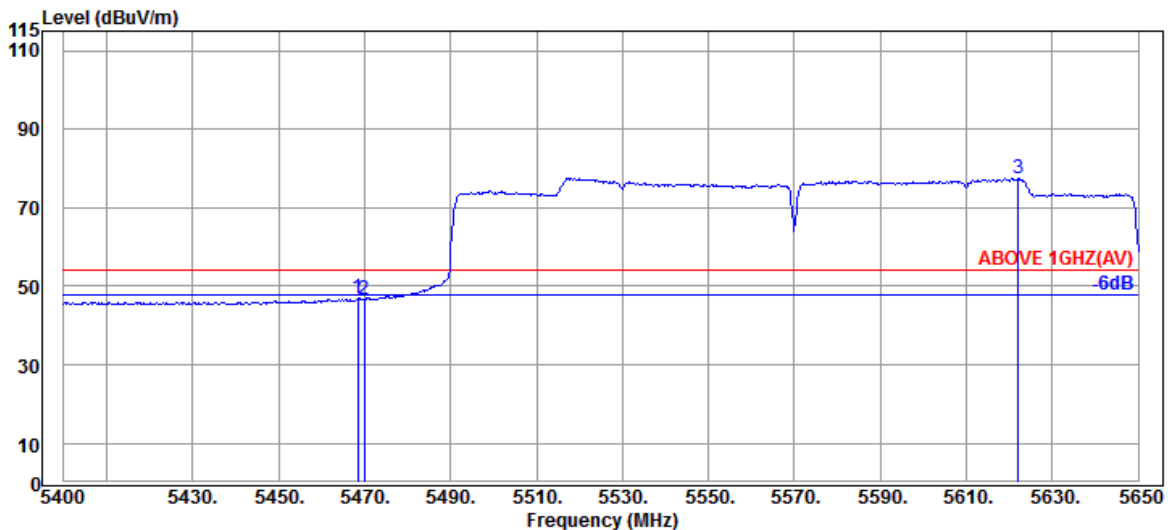


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.47	9.20	34.24	37.45	46.88	54.00	7.12	Average
5470.000	34.47	9.20	34.24	37.01	46.44	54.00	7.56	Average
@ 5622.000	34.40	9.33	34.28	68.13	77.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

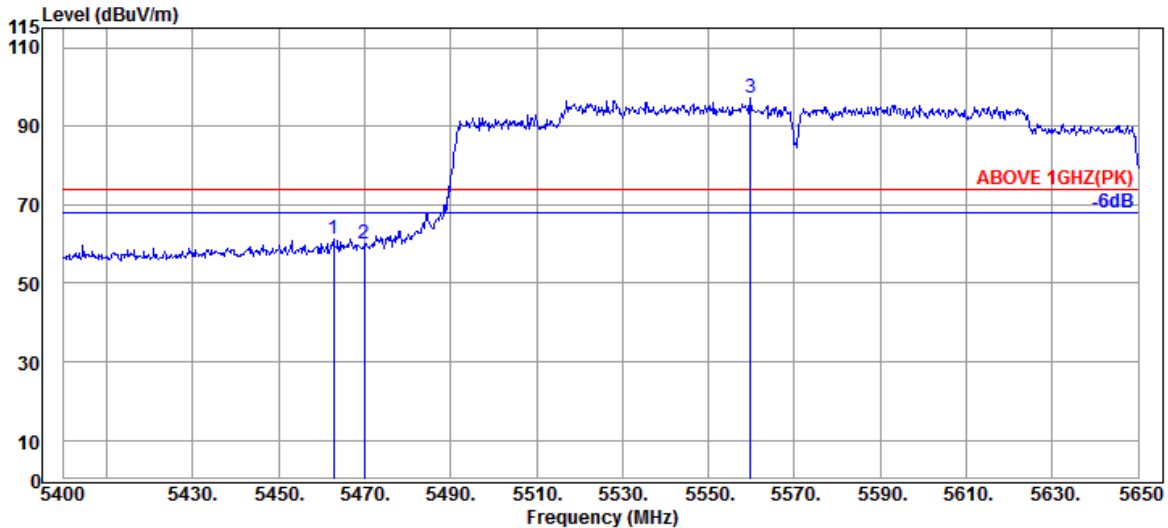

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.750	34.50	9.20	34.24	51.73	61.19	74.00	12.81	Peak
5470.000	34.47	9.20	34.24	50.67	60.10	74.00	13.90	Peak
@ 5559.750	34.33	9.27	34.26	88.02	97.36	---	---	Peak

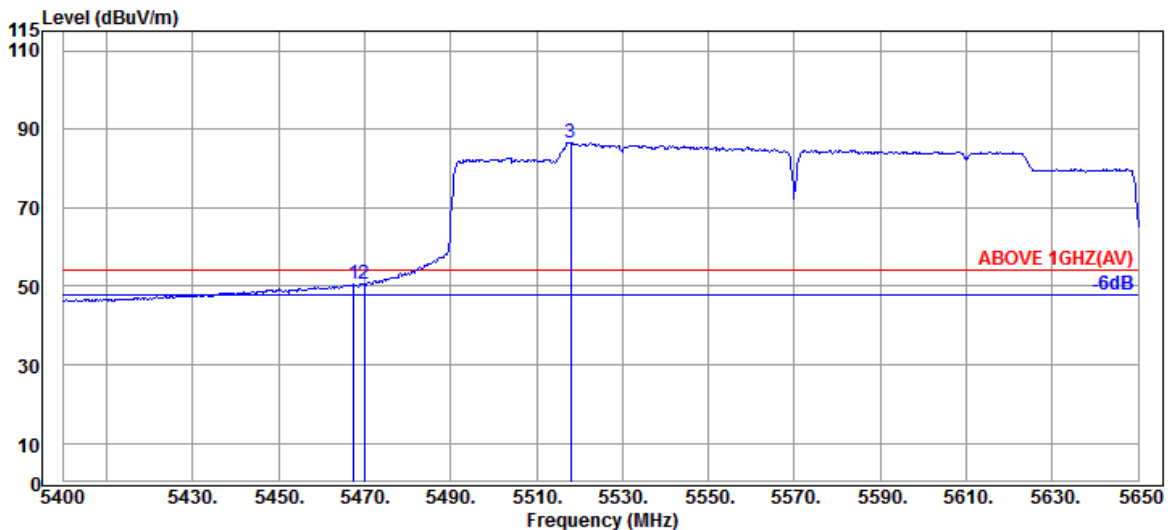


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	9.20	34.24	41.22	50.65	54.00	3.35	Average
5470.000	34.47	9.20	34.24	41.16	50.59	54.00	3.41	Average
@ 5518.000	34.37	9.24	34.24	77.32	86.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

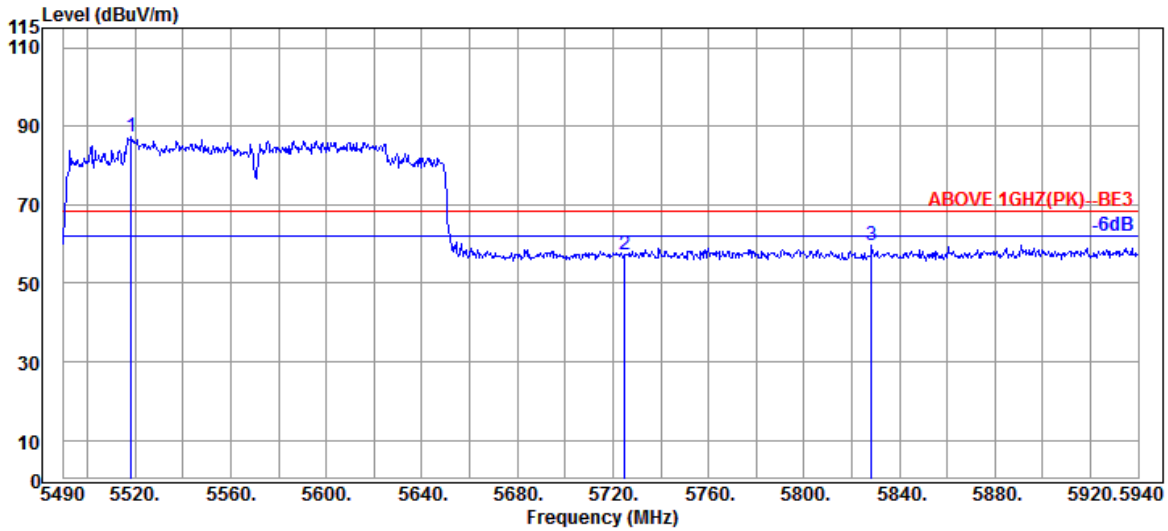

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5518.350	34.37	9.24	34.24	77.88	87.25	---	---	Peak
5724.900	34.67	9.42	34.32	47.66	57.43	68.20	10.77	Peak
5828.400	35.07	9.50	34.37	49.46	59.66	68.20	8.54	Peak

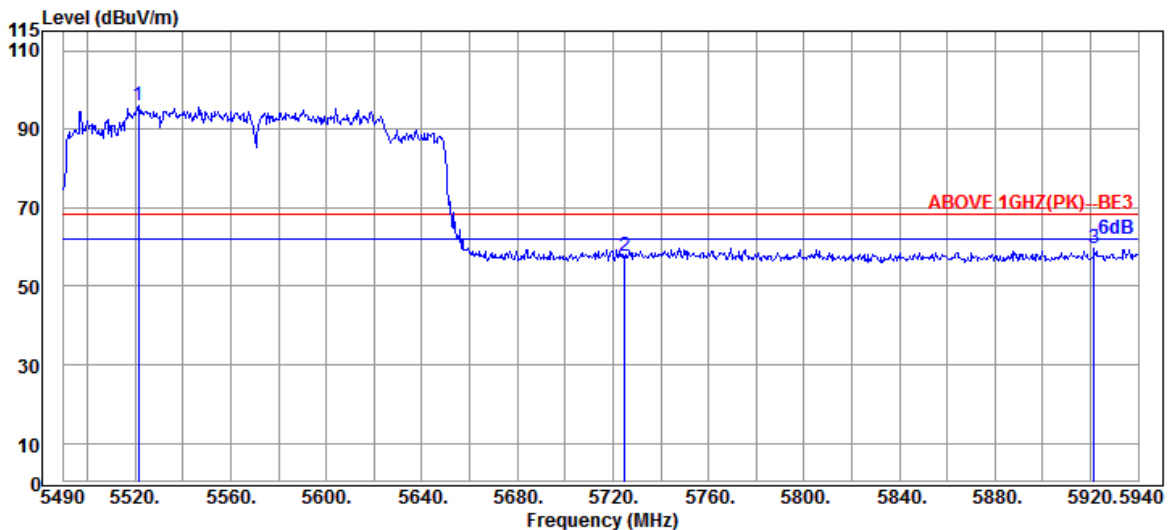


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5521.500	34.37	9.24	34.24	86.79	96.16	---	---	Peak
5724.900	34.67	9.42	34.32	47.80	57.57	68.20	10.63	Peak
5921.550	35.37	9.59	34.41	49.19	59.74	68.20	8.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

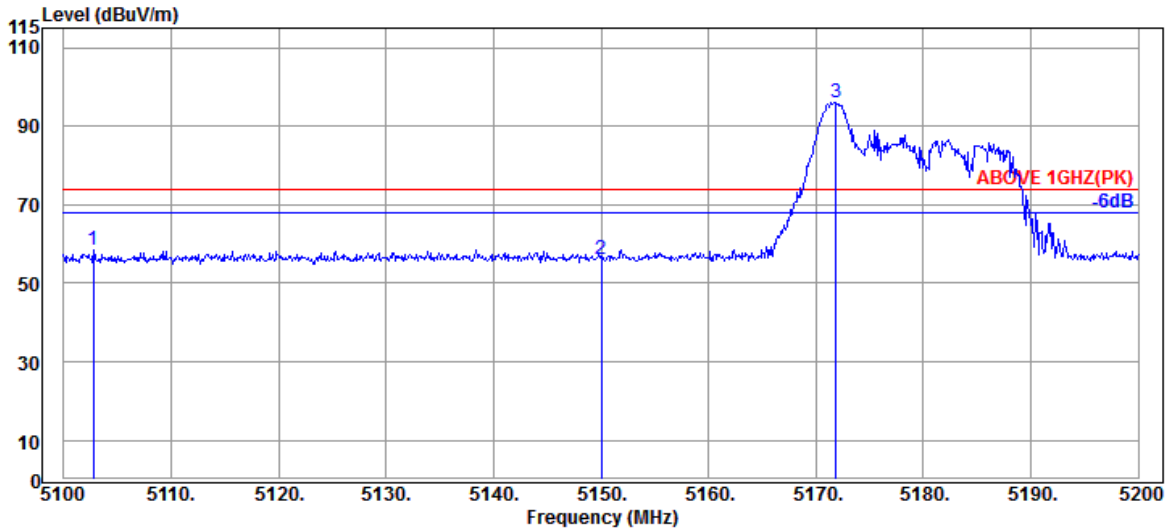

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.800	34.10	8.88	34.36	49.84	58.46	74.00	15.54	Peak
5150.000	34.20	8.92	34.35	47.36	56.13	74.00	17.87	Peak
@ 5171.900	34.20	8.94	34.34	87.24	96.04	---	---	Peak

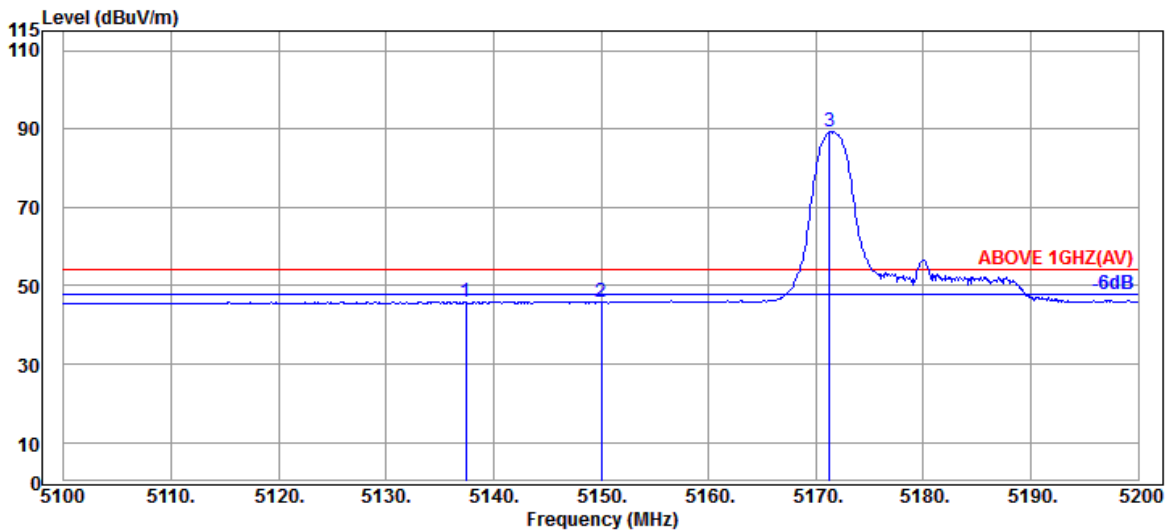


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.400	34.17	8.91	34.36	37.21	45.93	54.00	8.07	Average
5150.000	34.20	8.92	34.35	37.08	45.85	54.00	8.15	Average
@ 5171.300	34.20	8.94	34.34	80.67	89.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

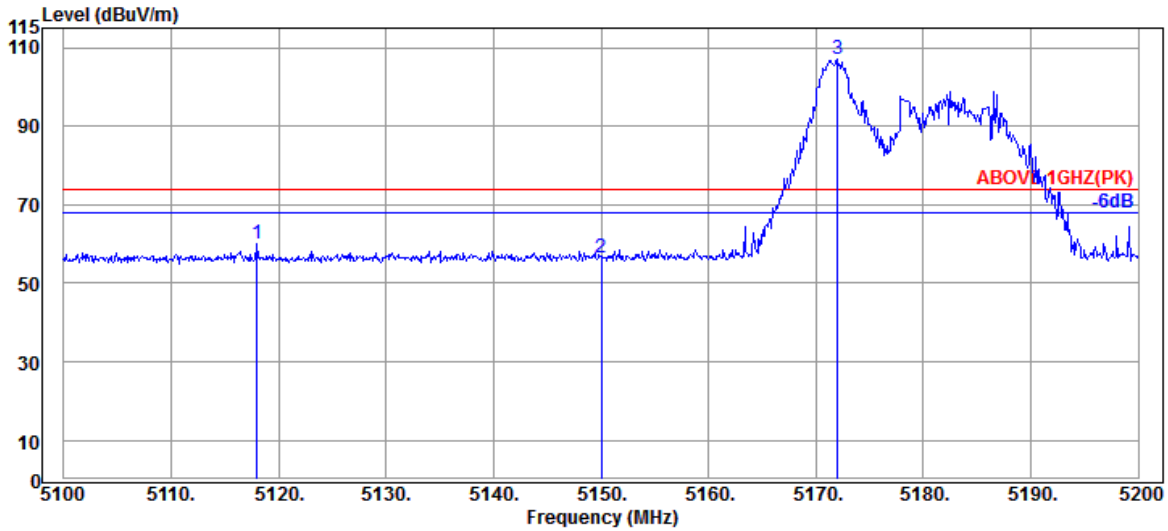

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.000	34.13	8.89	34.36	51.24	59.90	74.00	14.10	Peak
5150.000	34.20	8.92	34.35	47.77	56.54	74.00	17.46	Peak
@ 5172.000	34.20	8.94	34.34	98.24	107.04	---	---	Peak

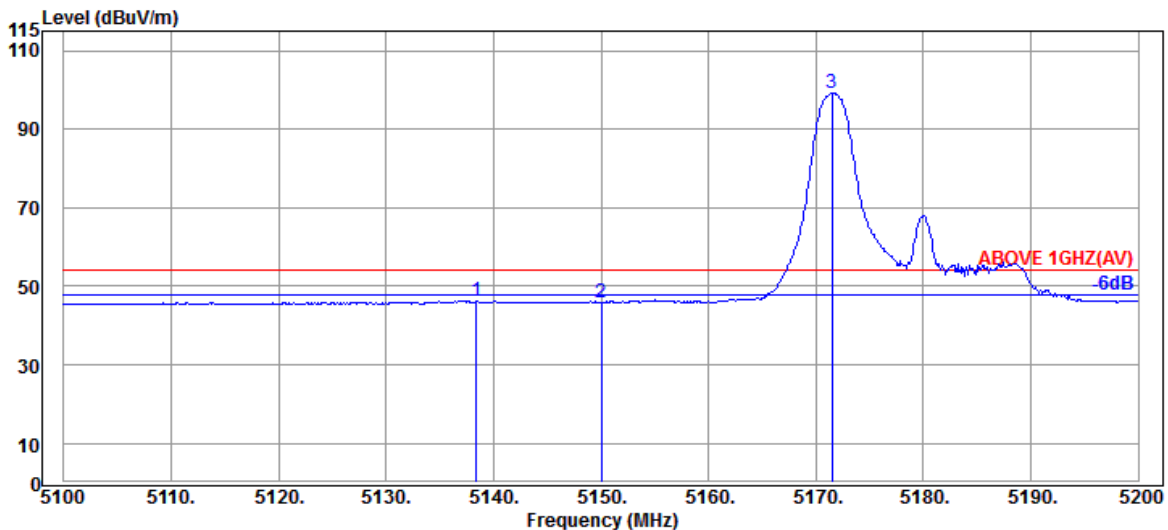


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.400	34.17	8.91	34.36	37.65	46.37	54.00	7.63	Average
5150.000	34.20	8.92	34.35	37.19	45.96	54.00	8.04	Average
@ 5171.500	34.20	8.94	34.34	90.36	99.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

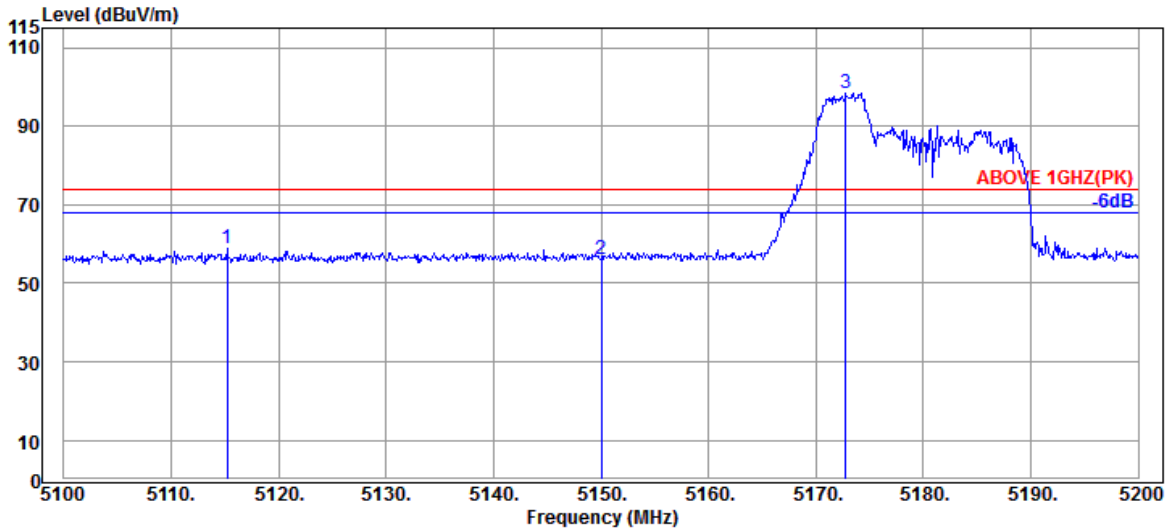

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.200	34.13	8.89	34.36	50.27	58.93	74.00	15.07	Peak
5150.000	34.20	8.92	34.35	47.38	56.15	74.00	17.85	Peak
@ 5172.800	34.20	8.94	34.34	89.76	98.56	---	---	Peak

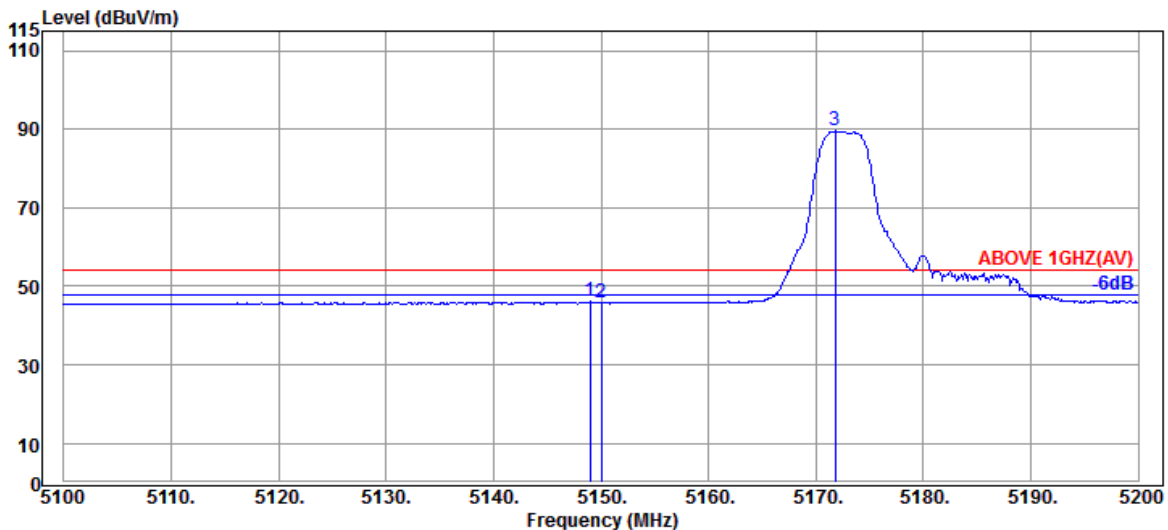


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	34.35	37.28	46.05	54.00	7.95	Average
5150.000	34.20	8.92	34.35	37.03	45.80	54.00	8.20	Average
@ 5171.800	34.20	8.94	34.34	80.73	89.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

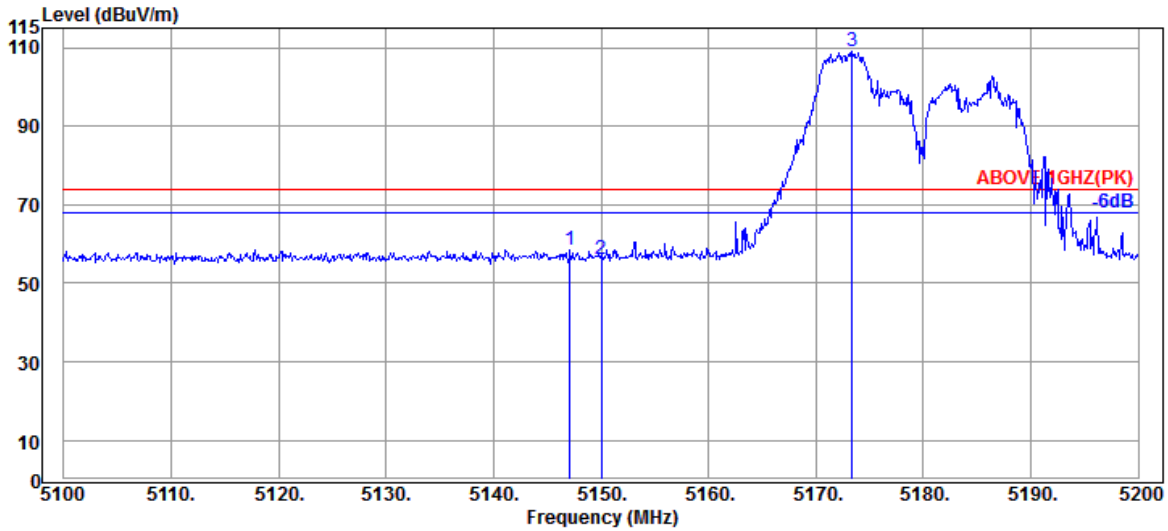

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.20	8.92	34.35	49.86	58.63	74.00	15.37	Peak
5150.000	34.20	8.92	34.35	47.22	55.99	74.00	18.01	Peak
@ 5173.400	34.20	8.94	34.34	100.30	109.10	---	---	Peak

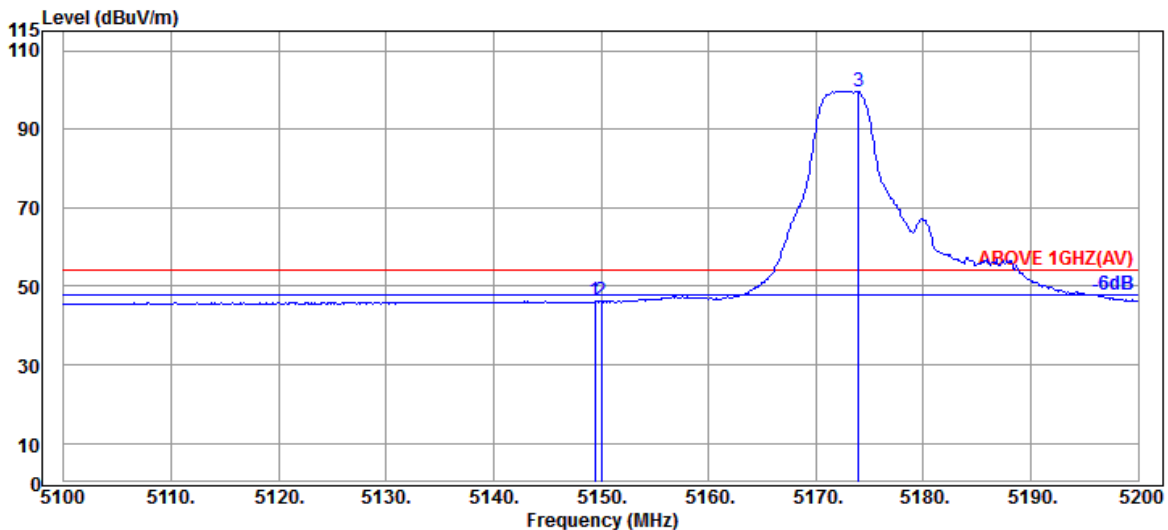


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	8.92	34.35	37.37	46.14	54.00	7.86	Average
5150.000	34.20	8.92	34.35	37.48	46.25	54.00	7.75	Average
@ 5174.000	34.20	8.95	34.34	90.96	99.77	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

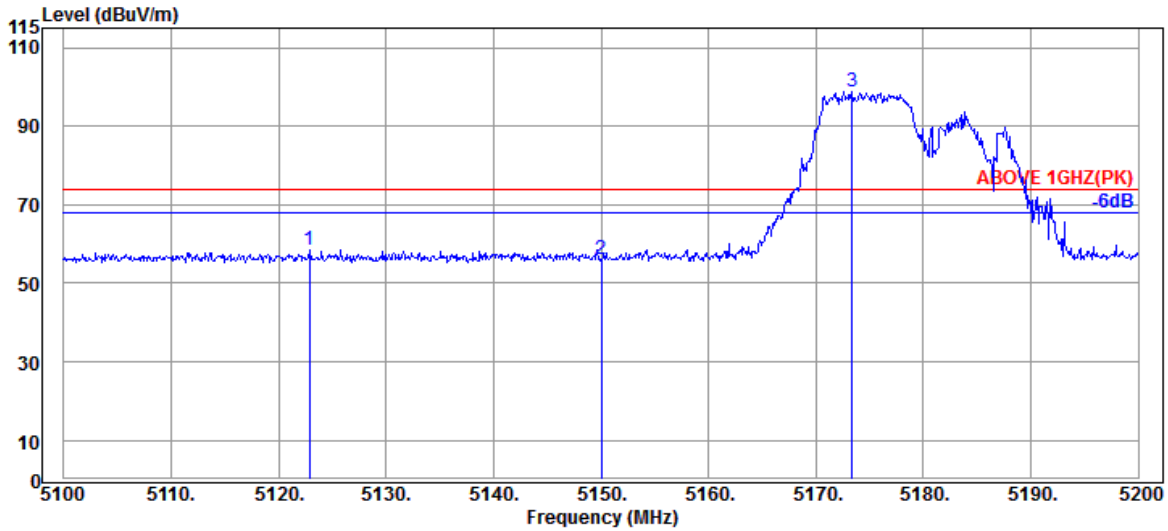

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.900	34.13	8.91	34.36	49.91	58.59	74.00	15.41	Peak
5150.000	34.20	8.92	34.35	47.16	55.93	74.00	18.07	Peak
@ 5173.400	34.20	8.94	34.34	89.99	98.79	---	---	Peak

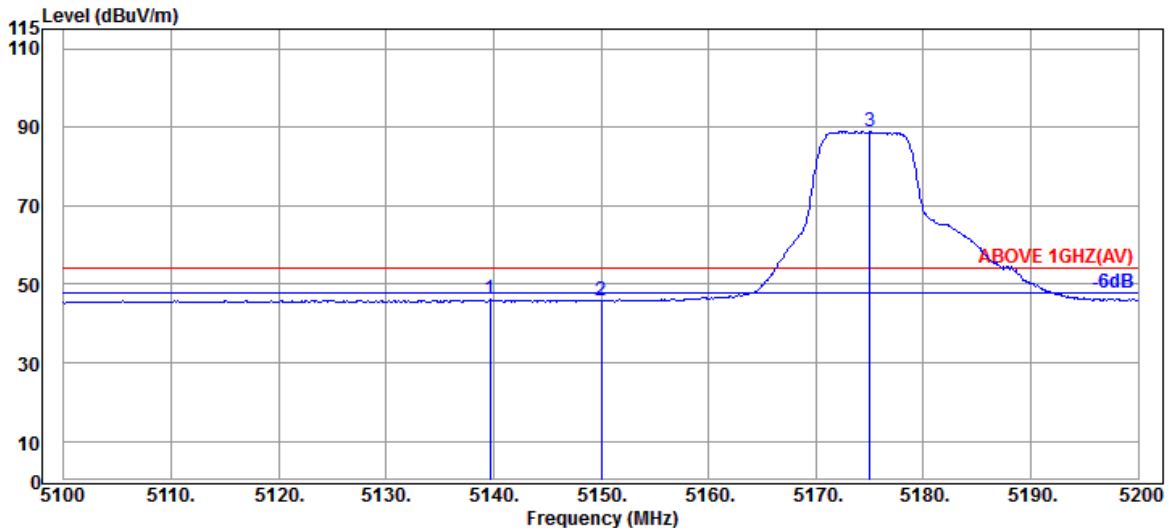


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.700	34.17	8.92	34.36	37.33	46.06	54.00	7.94	Average
5150.000	34.20	8.92	34.35	37.00	45.77	54.00	8.23	Average
@ 5175.000	34.20	8.95	34.34	80.12	88.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

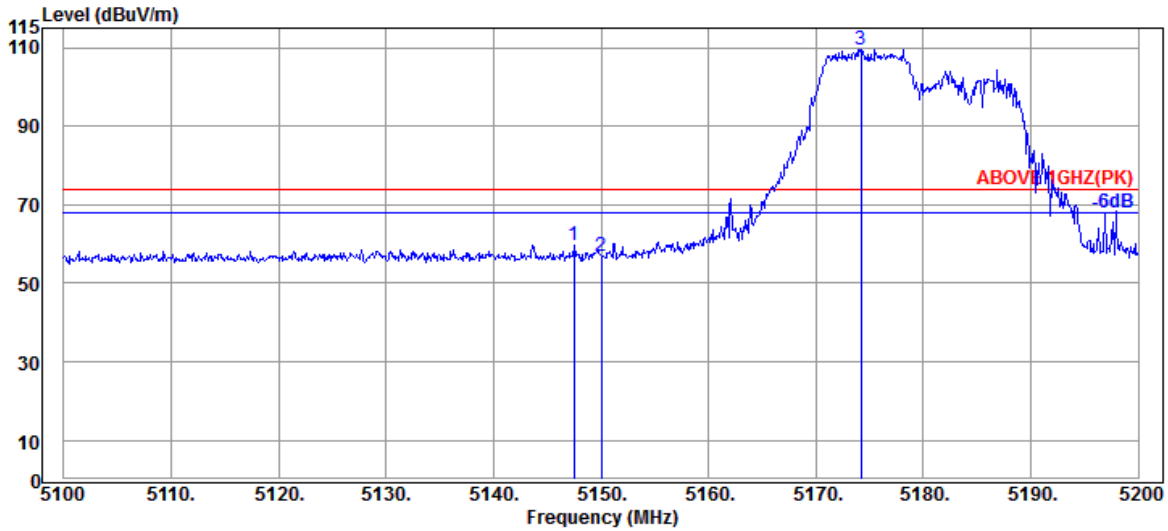

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	34.20	8.92	34.35	51.10	59.87	74.00	14.13	Peak
5150.000	34.20	8.92	34.35	48.15	56.92	74.00	17.08	Peak
@ 5174.200	34.20	8.95	34.34	100.76	109.57	---	---	Peak

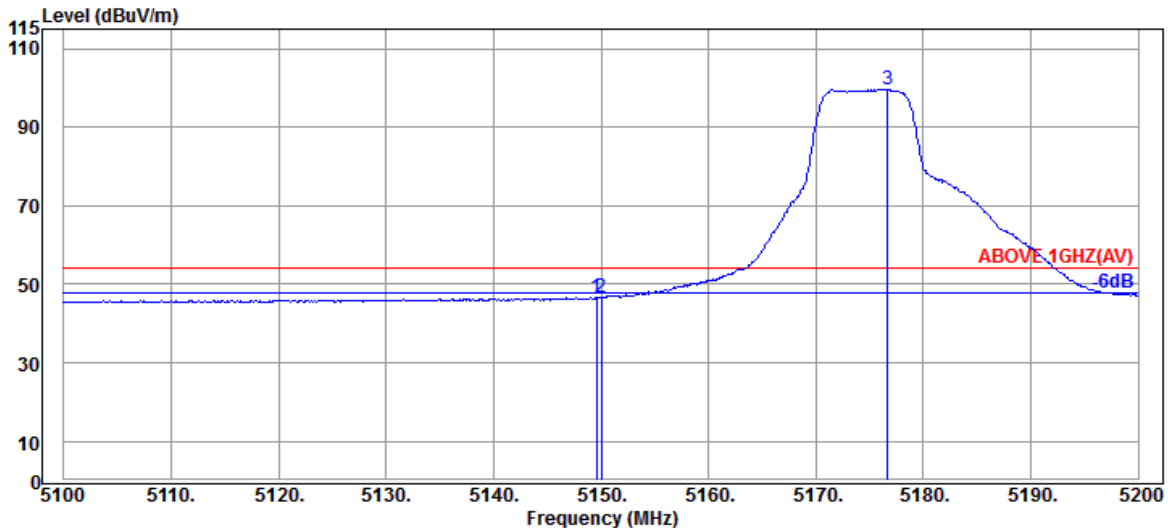


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	38.03	46.80	54.00	7.20	Average
5150.000	34.20	8.92	34.35	37.71	46.48	54.00	7.52	Average
@ 5176.700	34.20	8.95	34.34	90.85	99.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

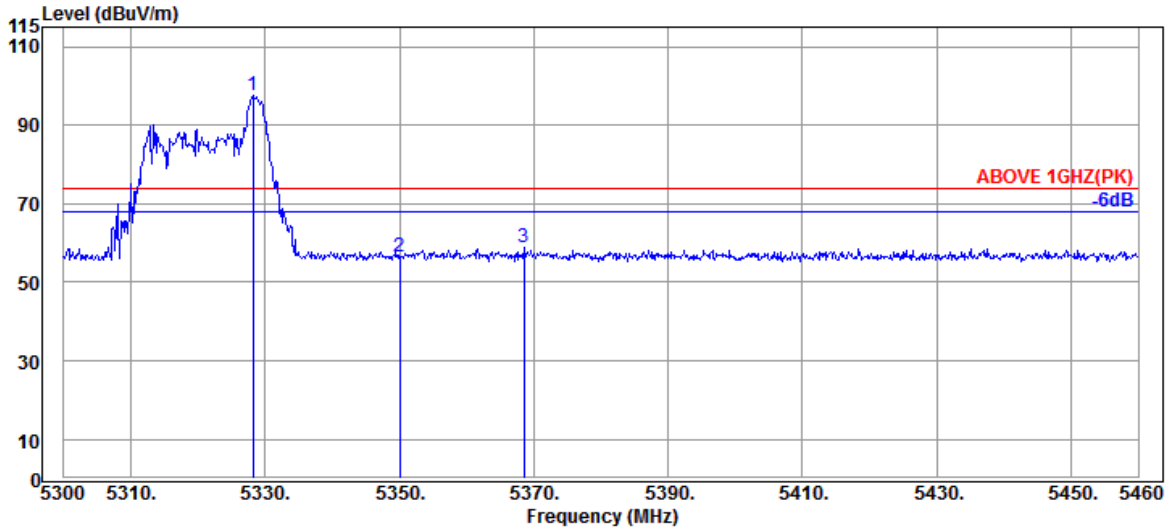

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	9.08	34.28	88.16	97.53	---	---	Peak
5350.080	34.60	9.10	34.27	47.08	56.51	74.00	17.49	Peak
5368.480	34.63	9.11	34.27	49.29	58.76	74.00	15.24	Peak

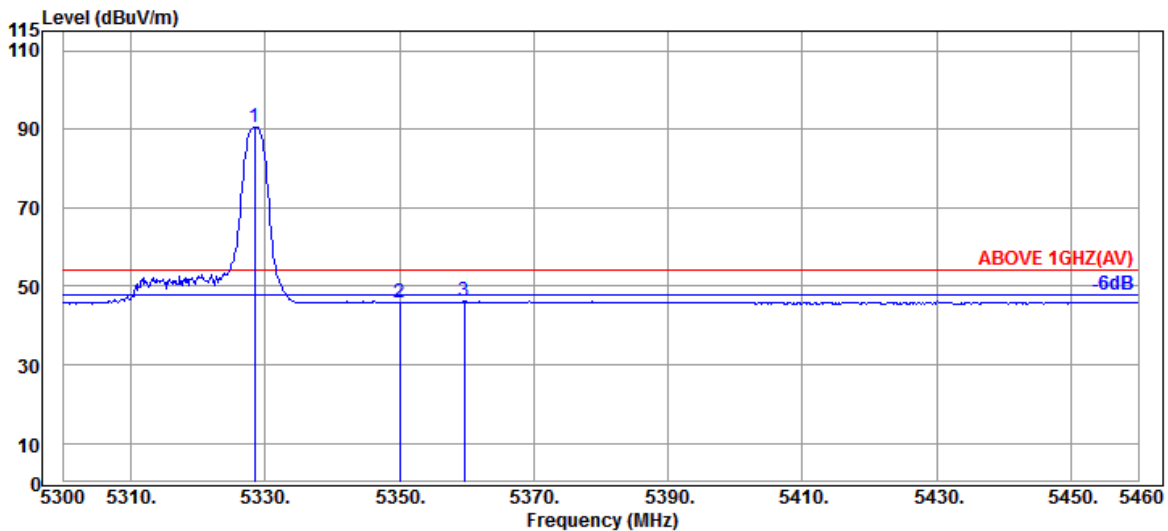

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	9.08	34.28	81.26	90.63	---	---	Average
5350.080	34.60	9.10	34.27	36.55	45.98	54.00	8.02	Average
5359.680	34.63	9.10	34.27	36.63	46.09	54.00	7.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

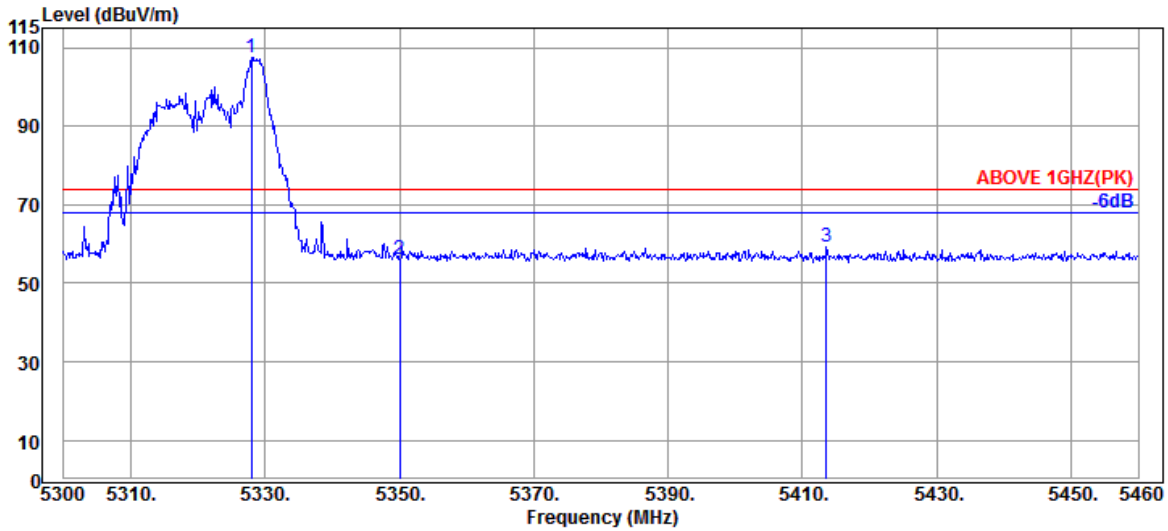

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	9.08	34.28	98.05	107.42	---	---	Peak
5350.080	34.60	9.10	34.27	46.85	56.28	74.00	17.72	Peak
5413.600	34.65	9.15	34.26	49.91	59.45	74.00	14.55	Peak

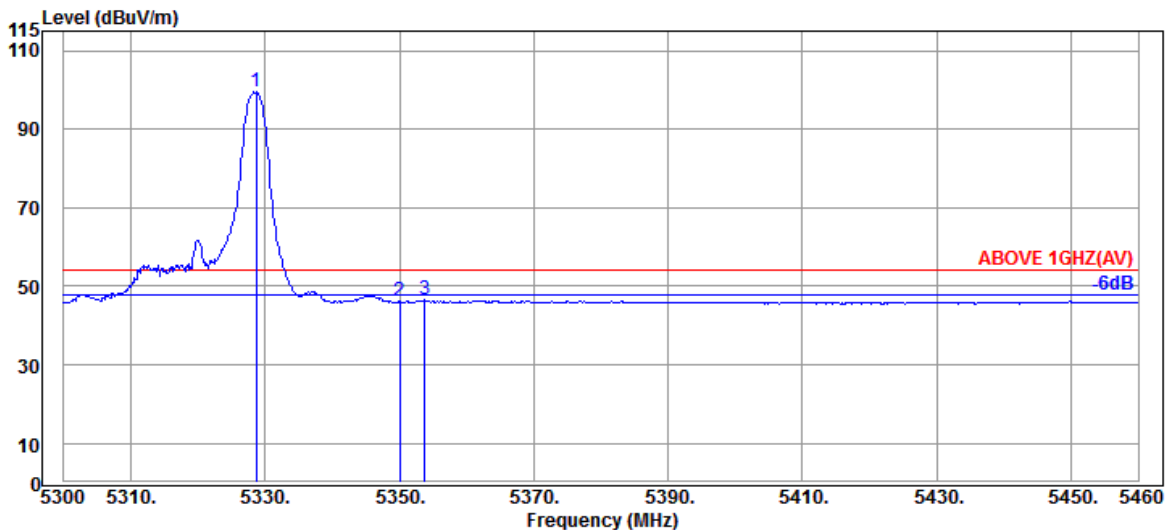


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	9.08	34.28	90.19	99.56	---	---	Average
5350.080	34.60	9.10	34.27	36.64	46.07	54.00	7.93	Average
5353.760	34.60	9.10	34.27	37.07	46.50	54.00	7.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

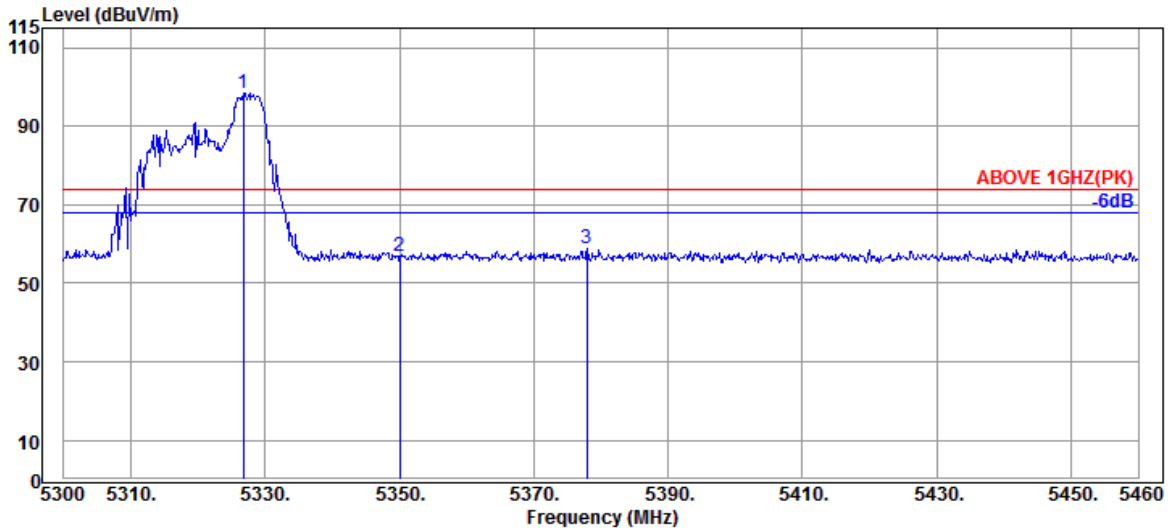

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	34.57	9.08	34.28	89.21	98.58	---	---	Peak
5350.080	34.60	9.10	34.27	47.64	57.07	74.00	16.93	Peak
5377.920	34.67	9.13	34.27	49.40	58.93	74.00	15.07	Peak

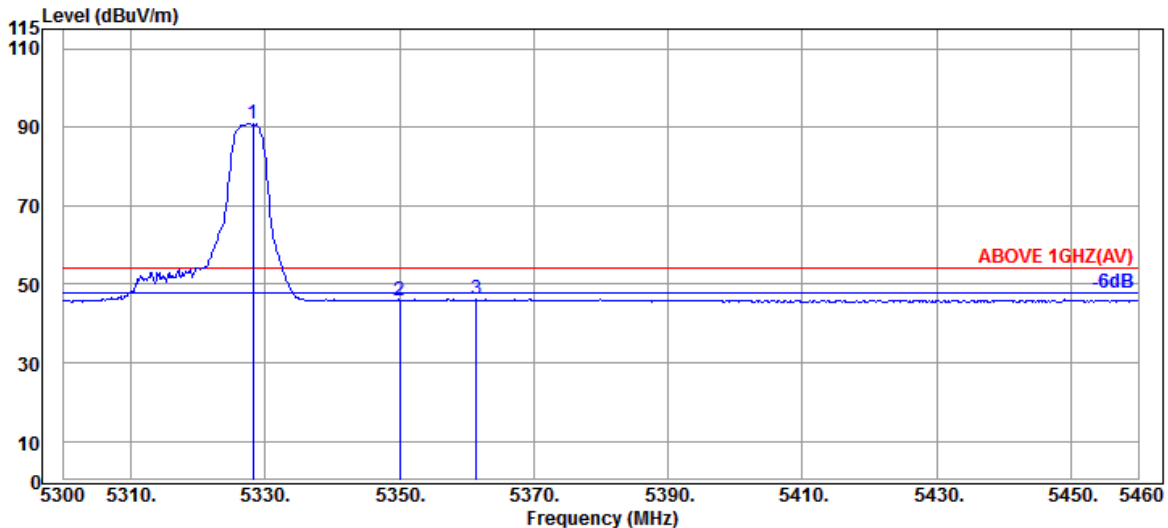


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	9.08	34.28	81.58	90.95	---	---	Average
5350.080	34.60	9.10	34.27	36.45	45.88	54.00	8.12	Average
5361.440	34.63	9.11	34.27	36.70	46.17	54.00	7.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

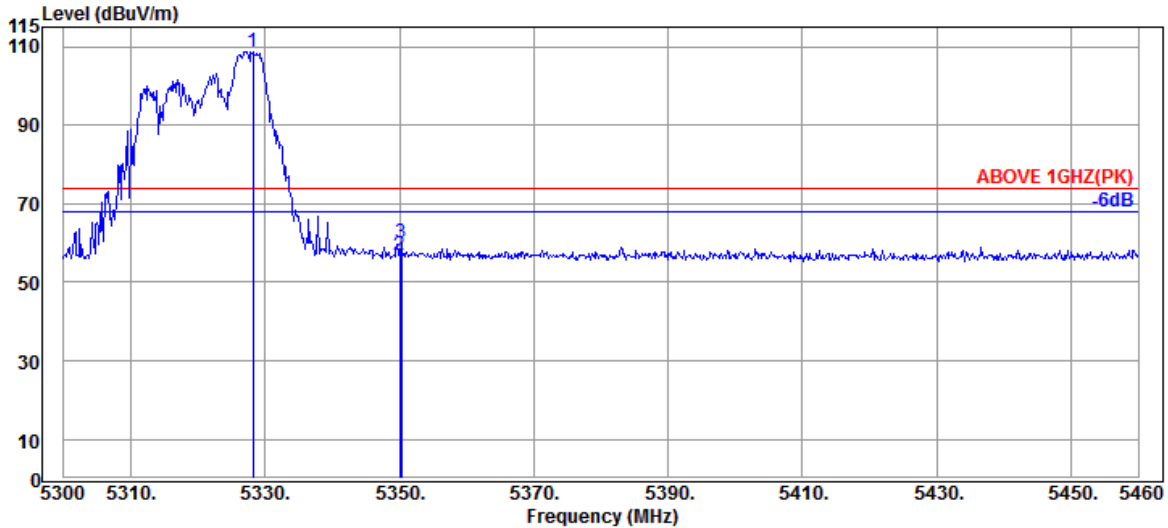

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.160	34.57	9.08	34.28	99.39	108.76	---	---	Peak
5350.080	34.60	9.10	34.27	47.56	56.99	74.00	17.01	Peak
5350.240	34.60	9.10	34.27	50.75	60.18	74.00	13.82	Peak

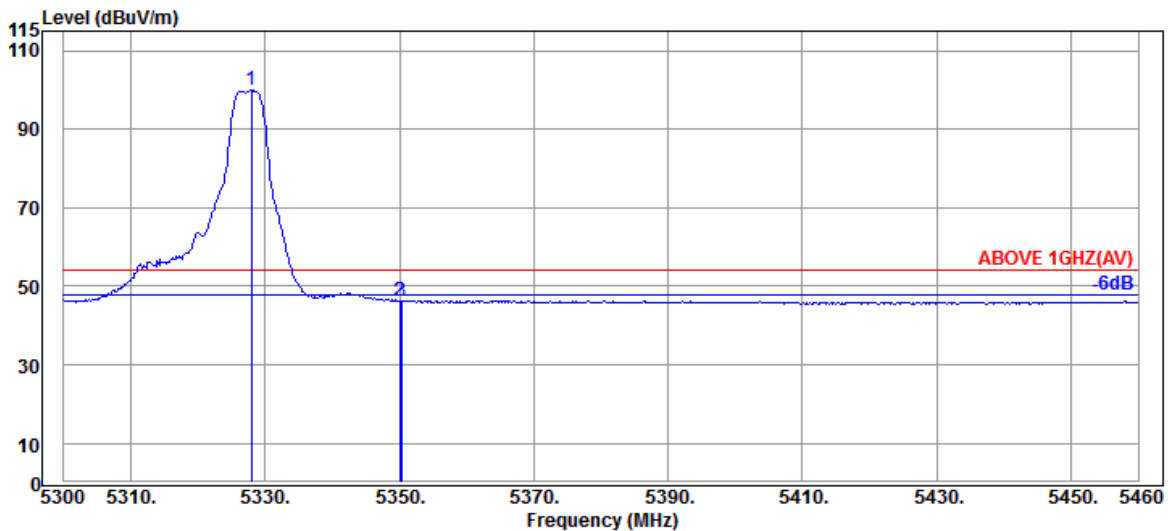


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.000	34.57	9.08	34.28	90.56	99.93	---	---	Average
5350.080	34.60	9.10	34.27	36.93	46.36	54.00	7.64	Average
5350.240	34.60	9.10	34.27	36.98	46.41	54.00	7.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

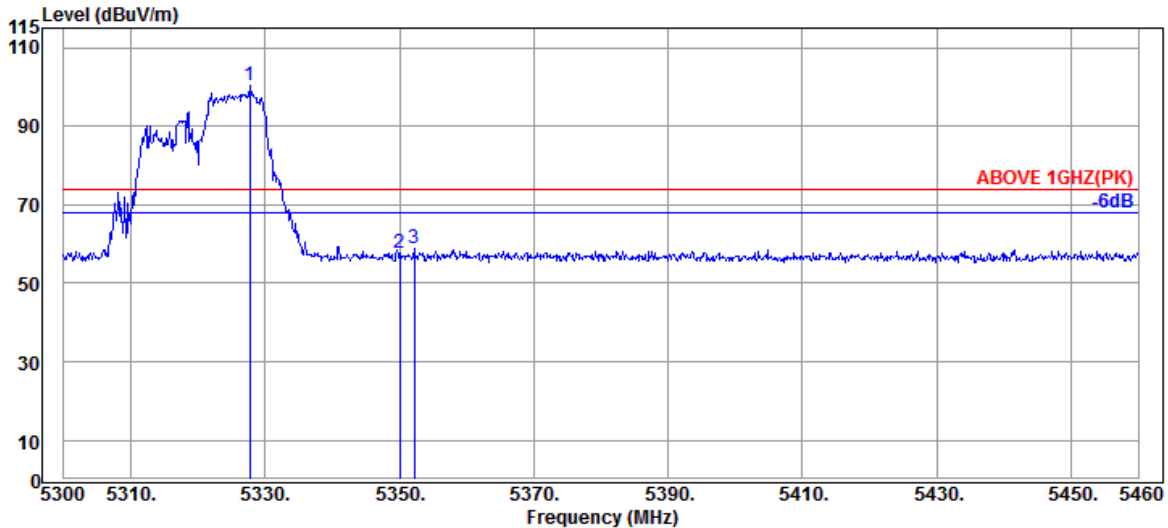

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.680	34.57	9.08	34.28	90.99	100.36	---	---	Peak
5350.080	34.60	9.10	34.27	48.14	57.57	74.00	16.43	Peak
5352.160	34.60	9.10	34.27	49.44	58.87	74.00	15.13	Peak

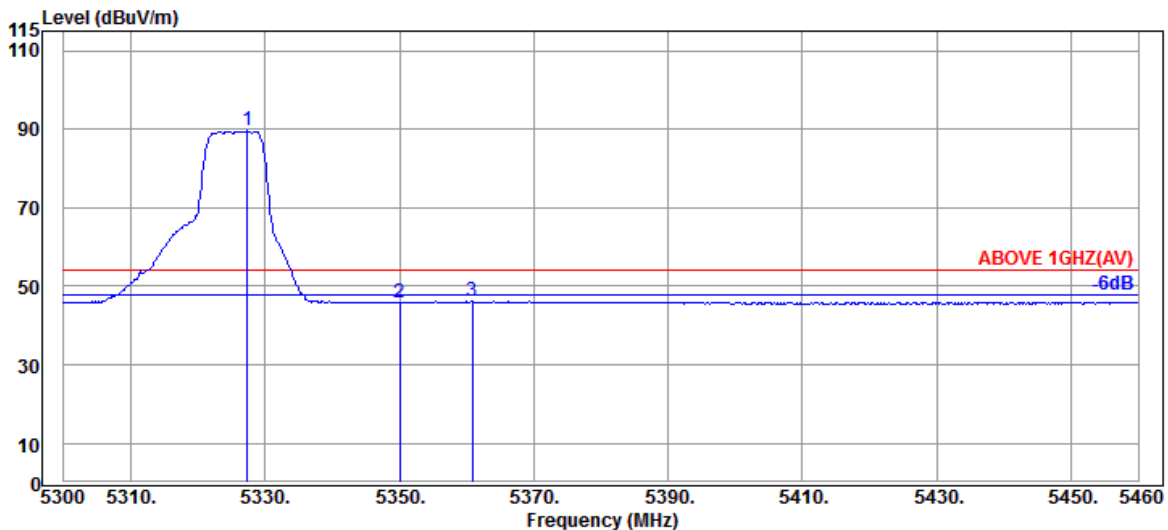


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.360	34.57	9.08	34.28	80.25	89.62	---	---	Average
5350.080	34.60	9.10	34.27	36.48	45.91	54.00	8.09	Average
5360.800	34.63	9.11	34.27	36.63	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

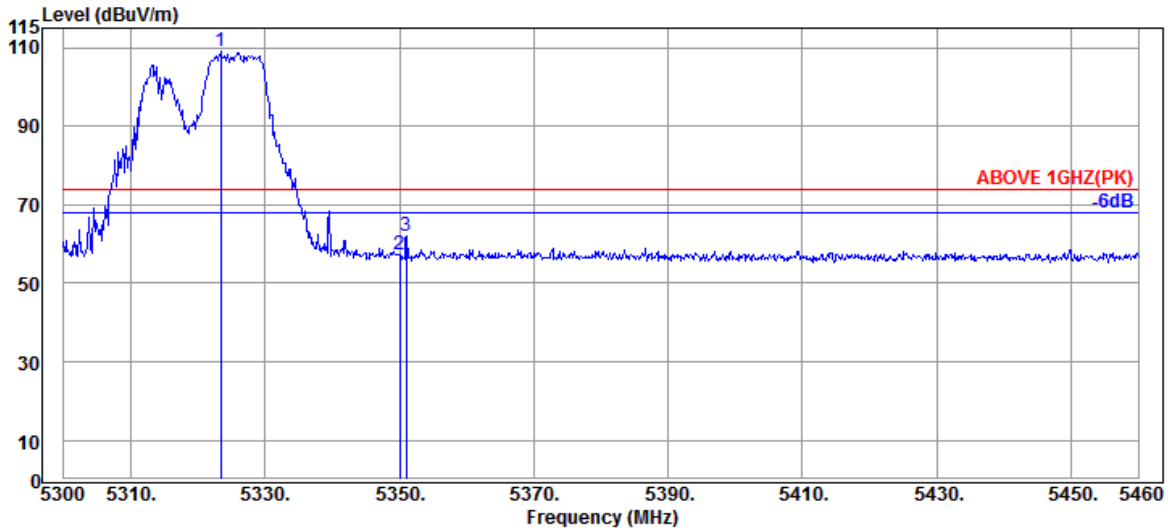

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.57	9.07	34.28	99.61	108.97	---	---	Peak
5350.080	34.60	9.10	34.27	47.70	57.13	74.00	16.87	Peak
5351.040	34.60	9.10	34.27	52.45	61.88	74.00	12.12	Peak

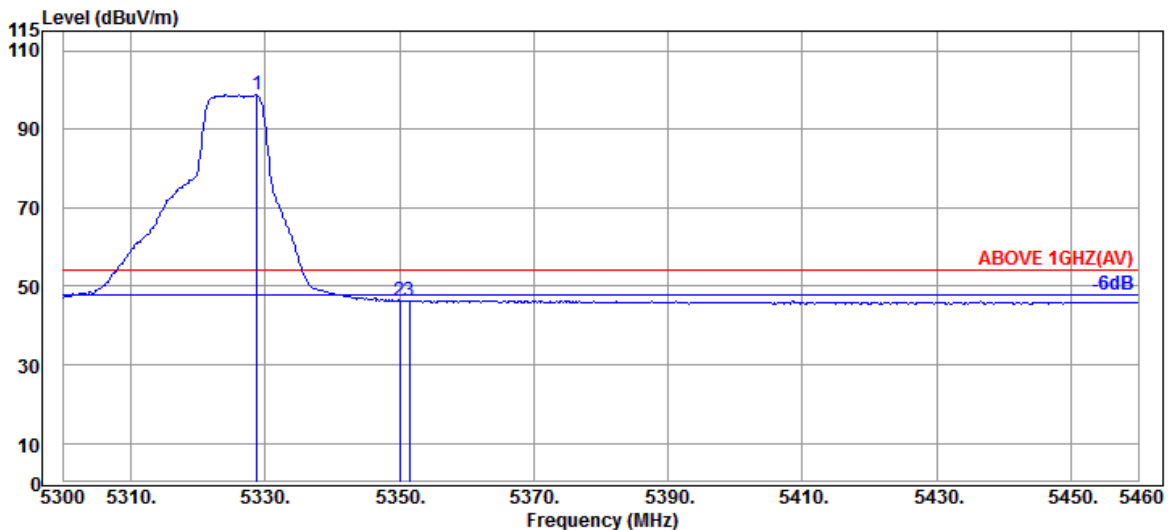


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.57	9.08	34.28	89.37	98.74	---	---	Average
5350.080	34.60	9.10	34.27	36.81	46.24	54.00	7.76	Average
5351.520	34.60	9.10	34.27	36.95	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

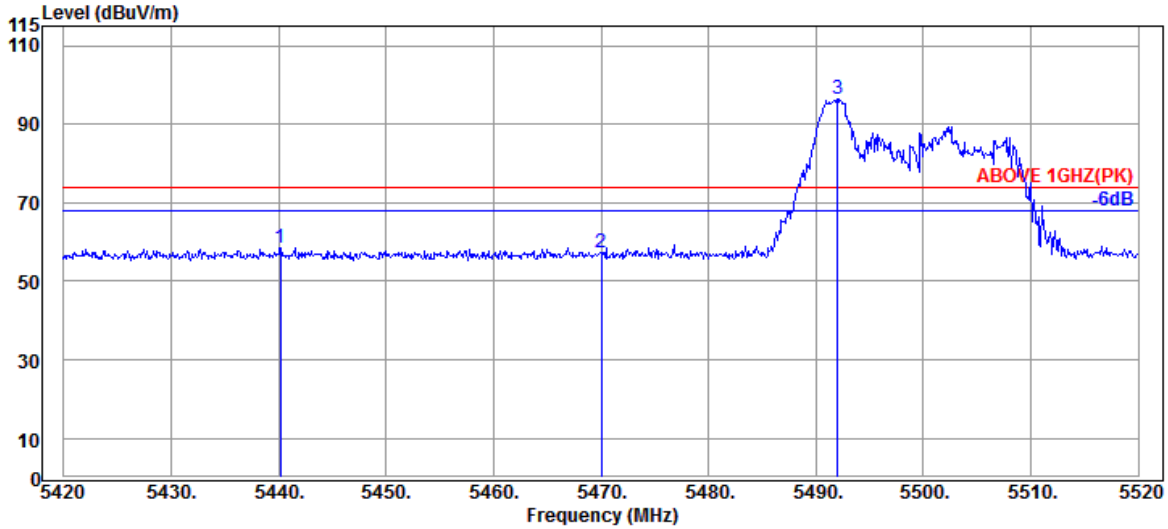

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.200	34.55	9.17	34.25	49.21	58.68	74.00	15.32	Peak
5470.000	34.47	9.20	34.24	47.70	57.13	74.00	16.87	Peak
@ 5492.000	34.43	9.21	34.23	87.07	96.48	---	---	Peak

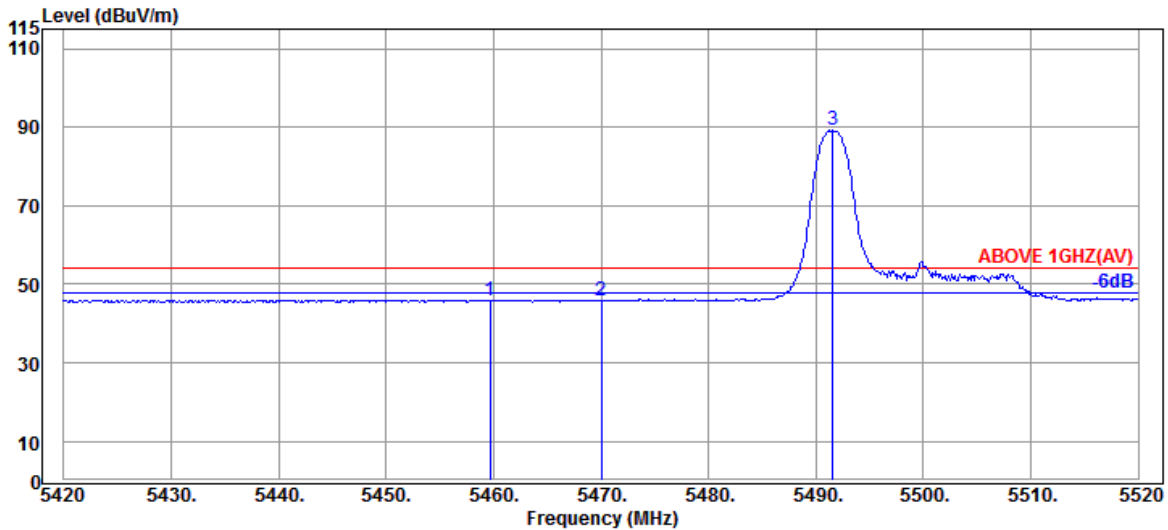


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.50	9.18	34.24	36.58	46.02	54.00	7.98	Average
5470.000	34.47	9.20	34.24	36.33	45.76	54.00	8.24	Average
@ 5491.600	34.43	9.21	34.23	79.75	89.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

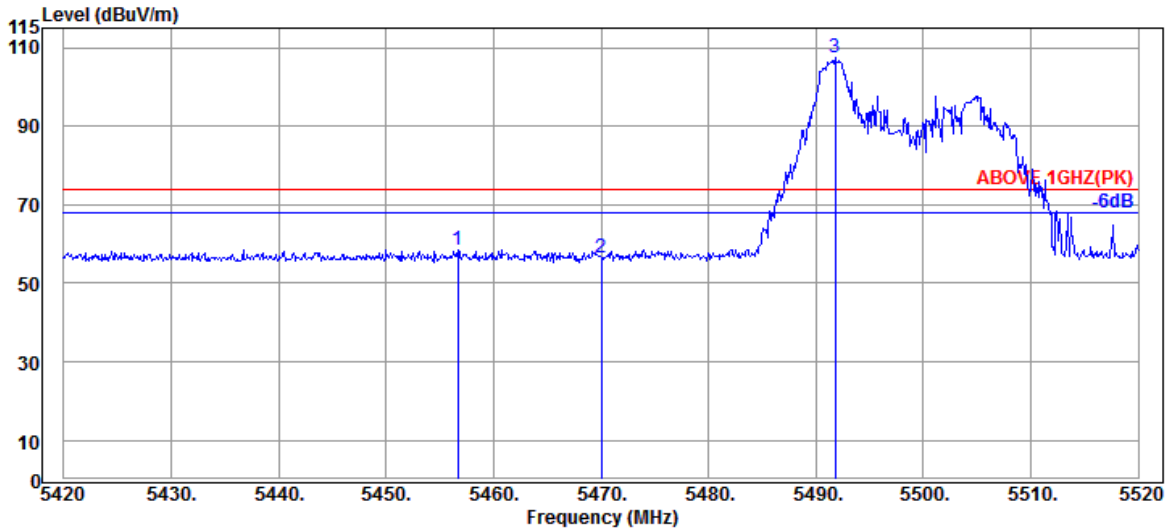

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.700	34.50	9.18	34.24	49.02	58.46	74.00	15.54	Peak
5470.000	34.47	9.20	34.24	47.26	56.69	74.00	17.31	Peak
@ 5491.800	34.43	9.21	34.23	98.21	107.62	---	---	Peak

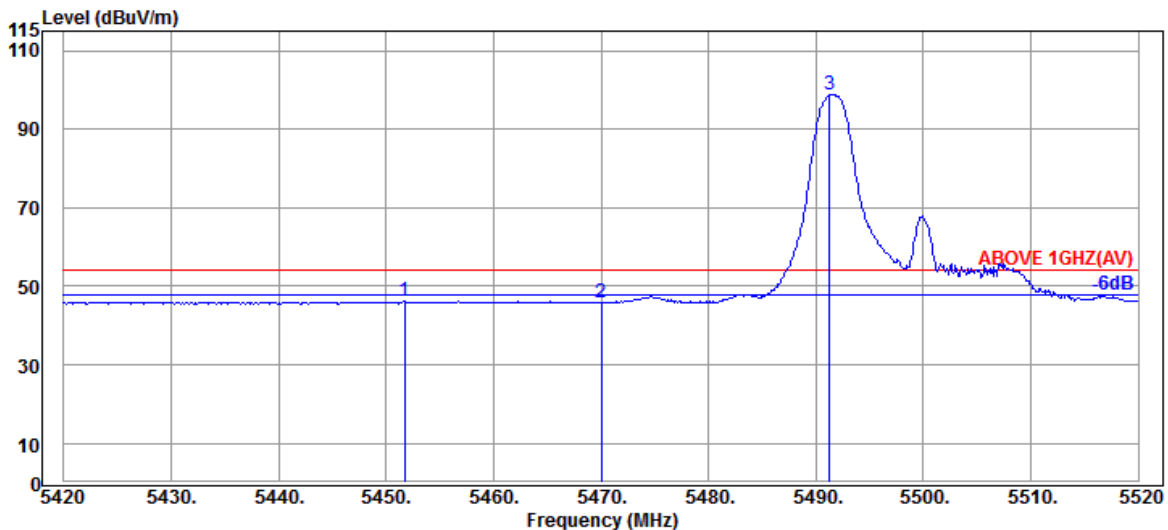


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.700	34.50	9.18	34.24	36.67	46.11	54.00	7.89	Average
5470.000	34.47	9.20	34.24	36.35	45.78	54.00	8.22	Average
@ 5491.300	34.43	9.21	34.23	89.52	98.93	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

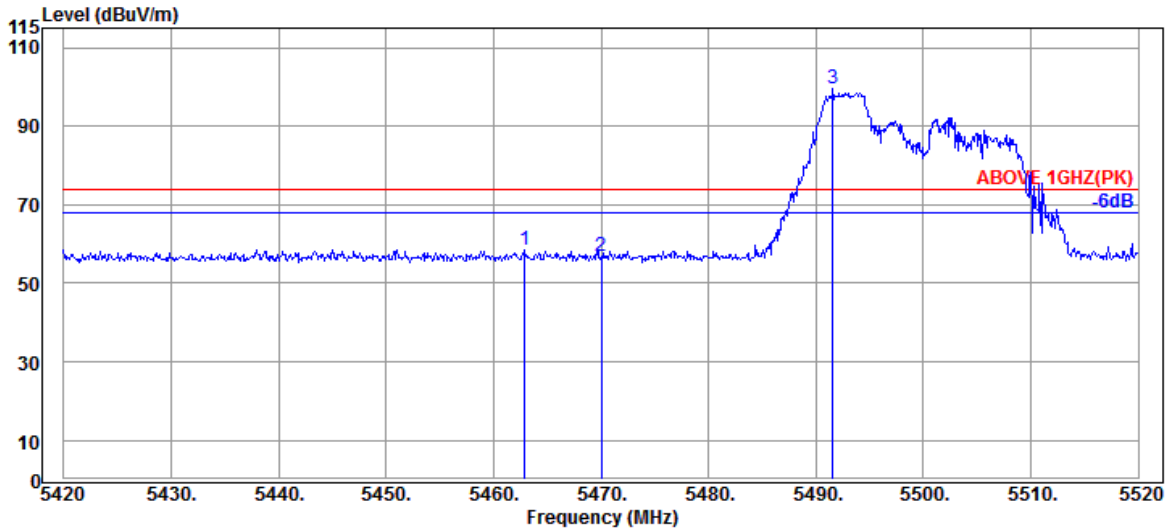

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.900	34.50	9.20	34.24	49.12	58.58	74.00	15.42	Peak
5470.000	34.47	9.20	34.24	47.48	56.91	74.00	17.09	Peak
@ 5491.600	34.43	9.21	34.23	90.01	99.42	---	---	Peak

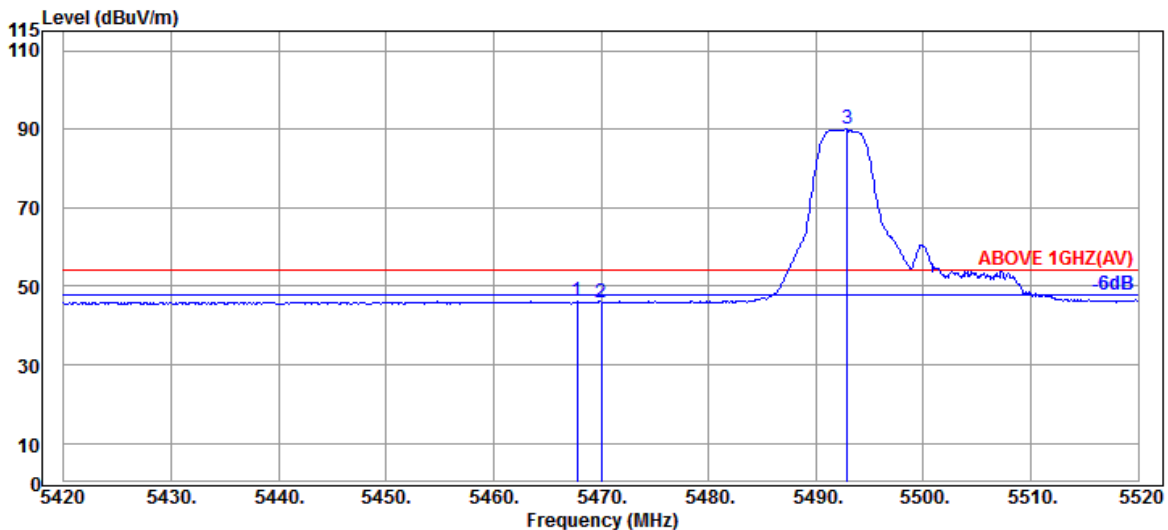


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.47	9.20	34.24	36.66	46.09	54.00	7.91	Average
5470.000	34.47	9.20	34.24	36.59	46.02	54.00	7.98	Average
@ 5492.900	34.43	9.21	34.23	80.66	90.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

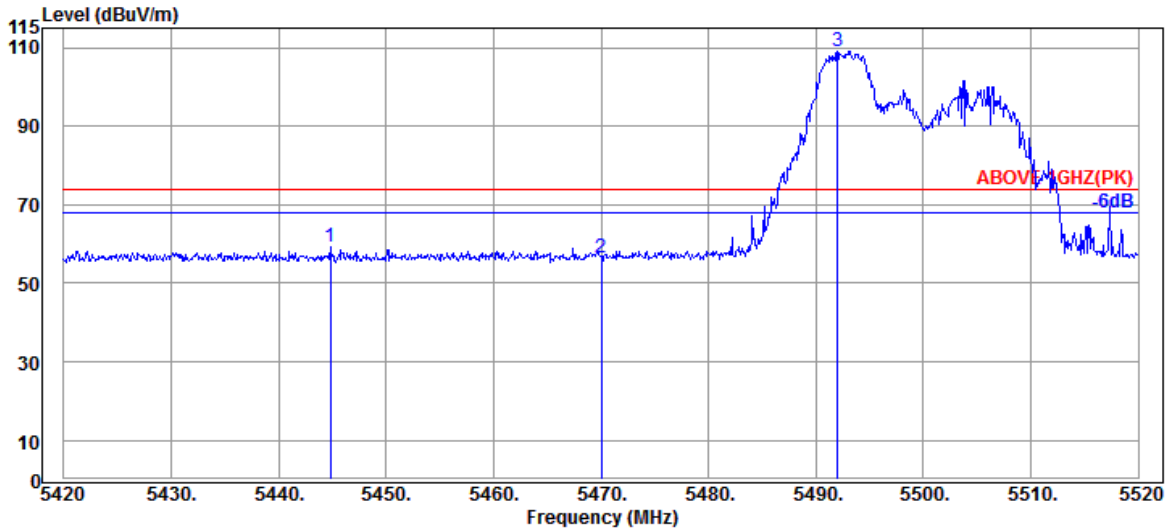

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.800	34.55	9.17	34.25	49.94	59.41	74.00	14.59	Peak
5470.000	34.47	9.20	34.24	47.27	56.70	74.00	17.30	Peak
@ 5492.000	34.43	9.21	34.23	99.83	109.24	---	---	Peak

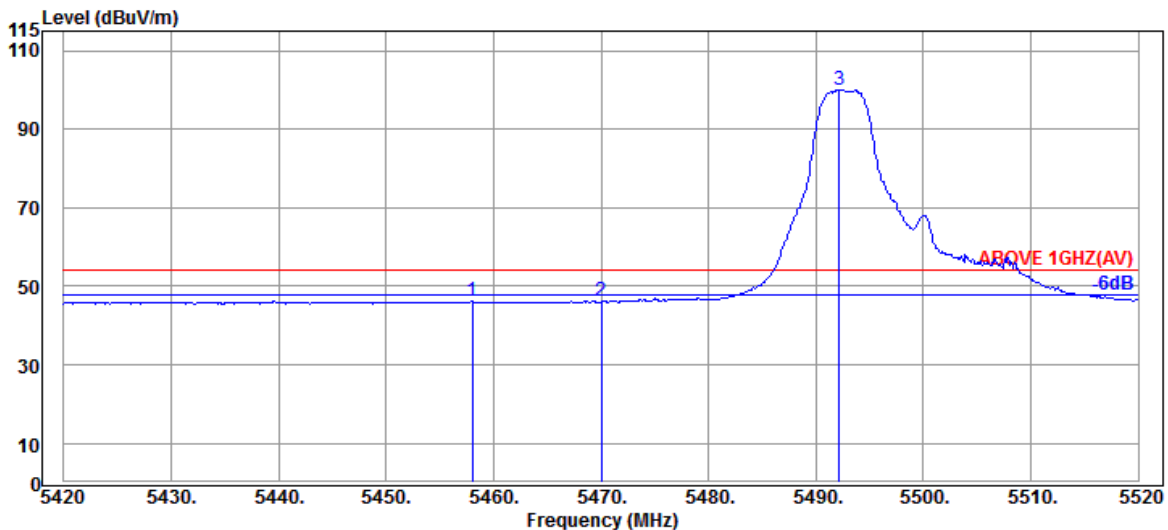


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.000	34.50	9.18	34.24	36.67	46.11	54.00	7.89	Average
5470.000	34.47	9.20	34.24	36.80	46.23	54.00	7.77	Average
@ 5492.200	34.43	9.21	34.23	90.72	100.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

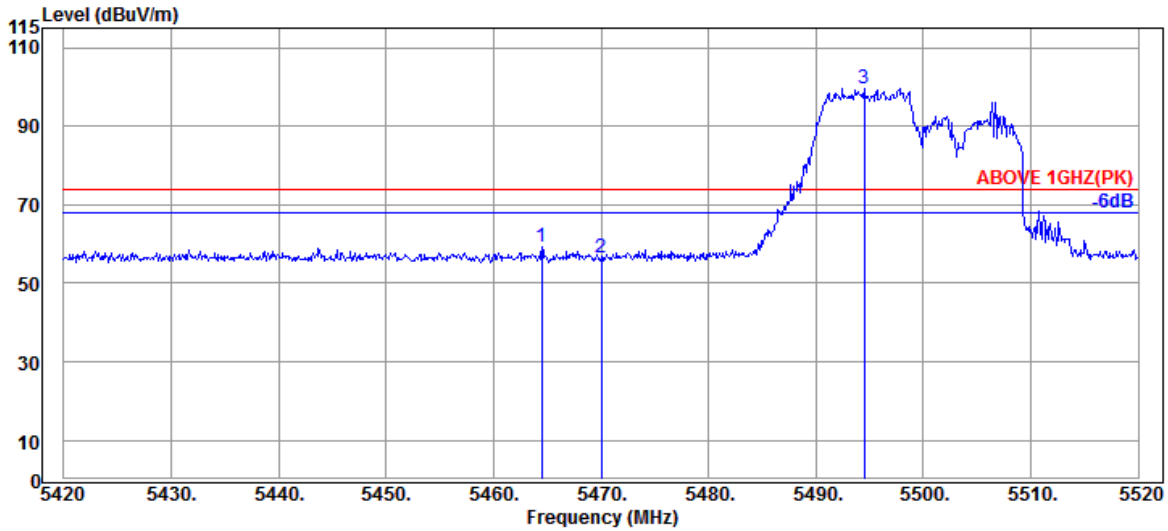

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.47	9.20	34.24	49.72	59.15	74.00	14.85	Peak
5470.000	34.47	9.20	34.24	47.05	56.48	74.00	17.52	Peak
@ 5494.500	34.43	9.21	34.23	90.34	99.75	---	---	Peak

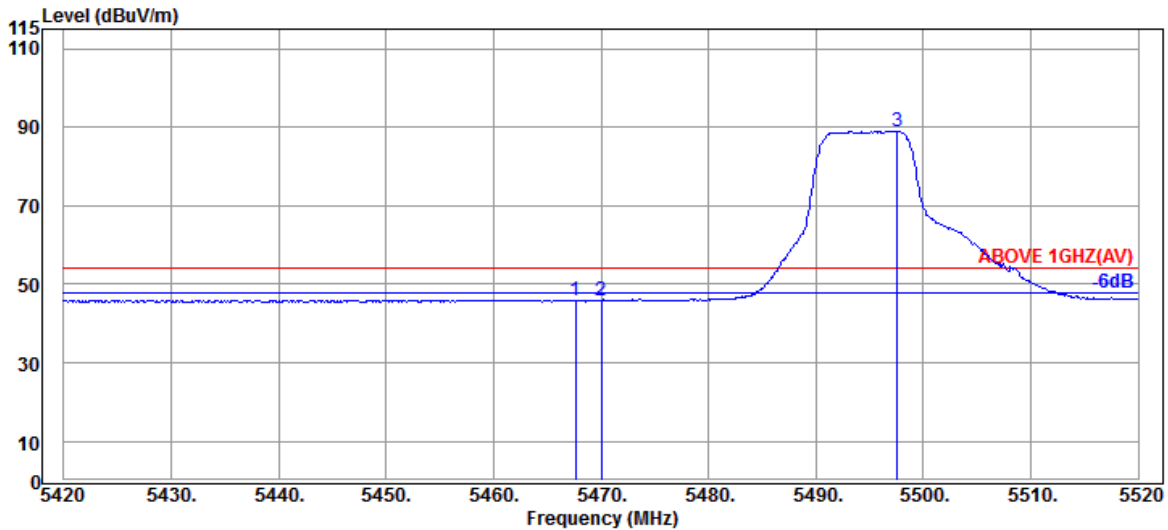


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.47	9.20	34.24	36.60	46.03	54.00	7.97	Average
5470.000	34.47	9.20	34.24	36.41	45.84	54.00	8.16	Average
@ 5497.600	34.40	9.23	34.23	79.68	89.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

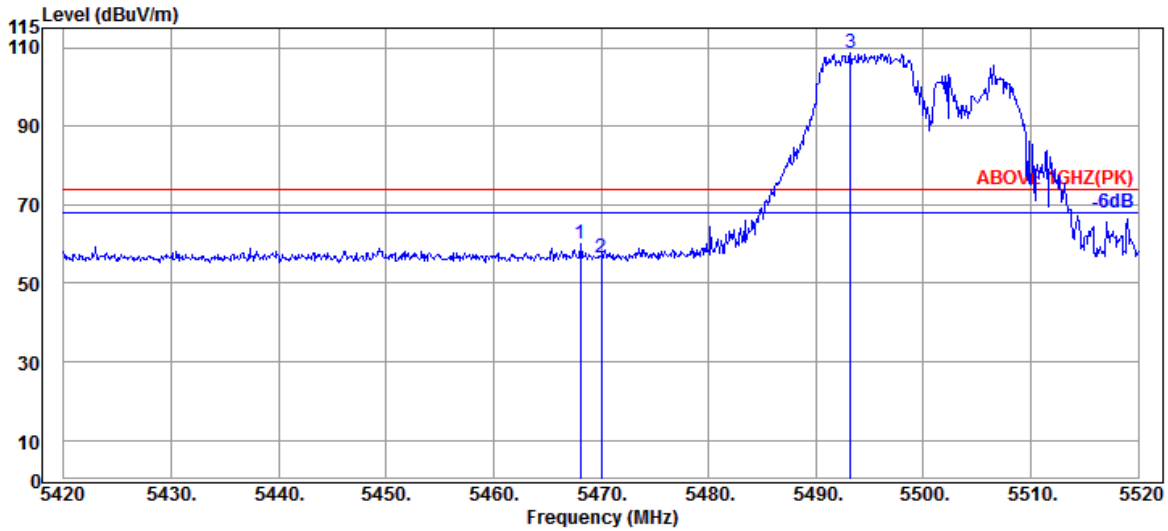

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.47	9.20	34.24	50.54	59.97	74.00	14.03	Peak
5470.000	34.47	9.20	34.24	47.08	56.51	74.00	17.49	Peak
@ 5493.200	34.43	9.21	34.23	99.38	108.79	---	---	Peak

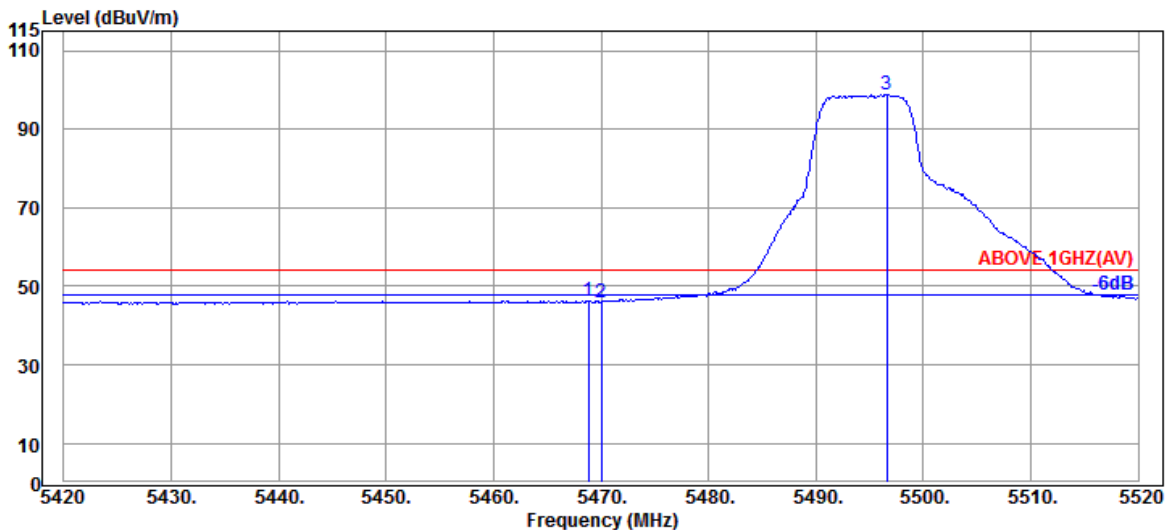


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.47	9.20	34.24	36.81	46.24	54.00	7.76	Average
5470.000	34.47	9.20	34.24	36.58	46.01	54.00	7.99	Average
@ 5496.600	34.40	9.23	34.23	89.51	98.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5700MHz

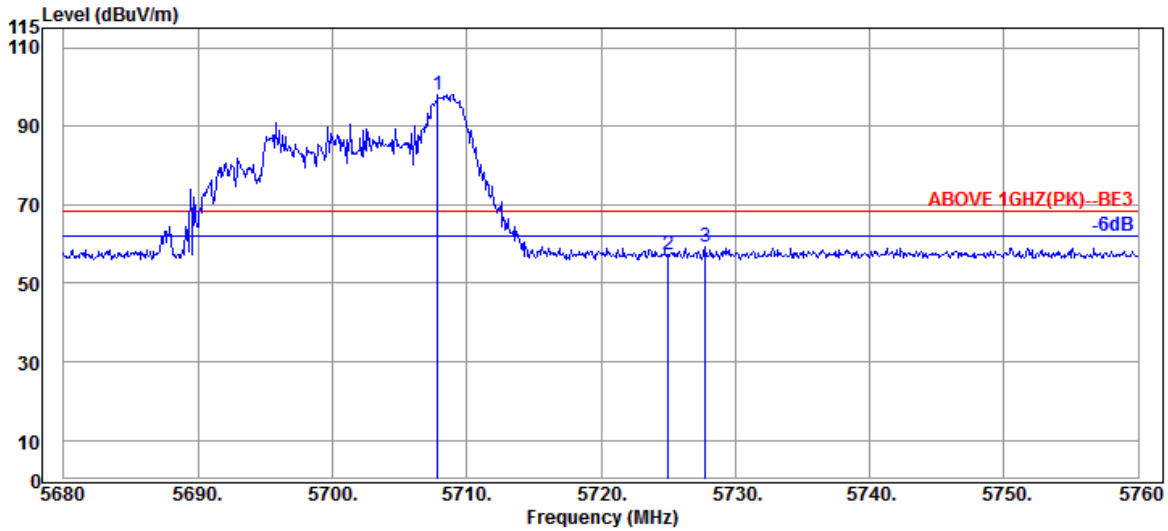

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.840	34.53	9.40	34.32	88.57	98.18	---	---	Peak
5725.040	34.67	9.42	34.32	47.54	57.31	68.20	10.89	Peak
5727.760	34.67	9.42	34.32	49.43	59.20	68.20	9.00	Peak

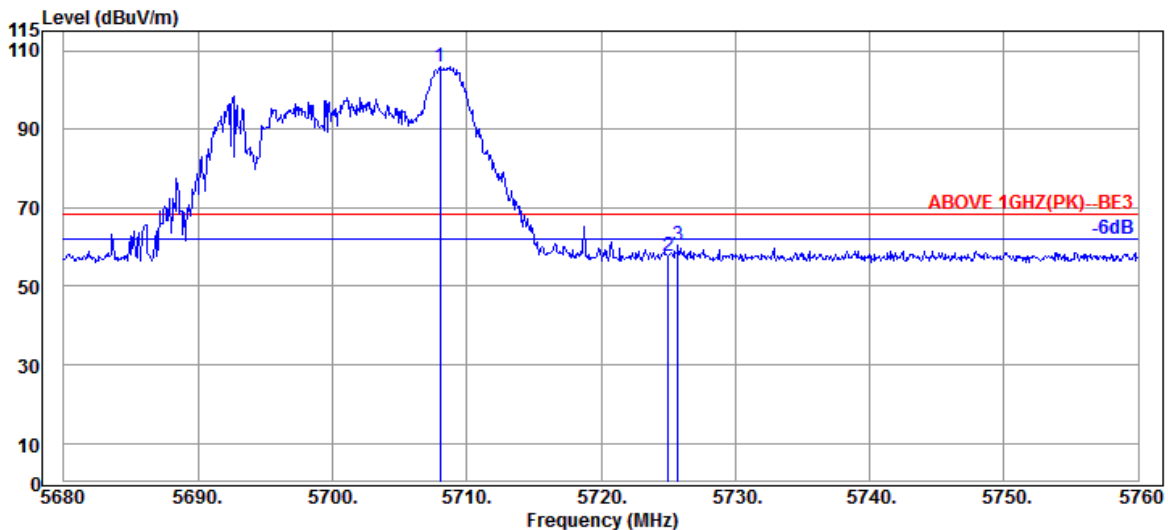


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	34.53	9.40	34.32	96.48	106.09	---	---	Peak
5725.040	34.67	9.42	34.32	47.94	57.71	68.20	10.49	Peak
5725.760	34.67	9.42	34.32	50.61	60.38	68.20	7.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

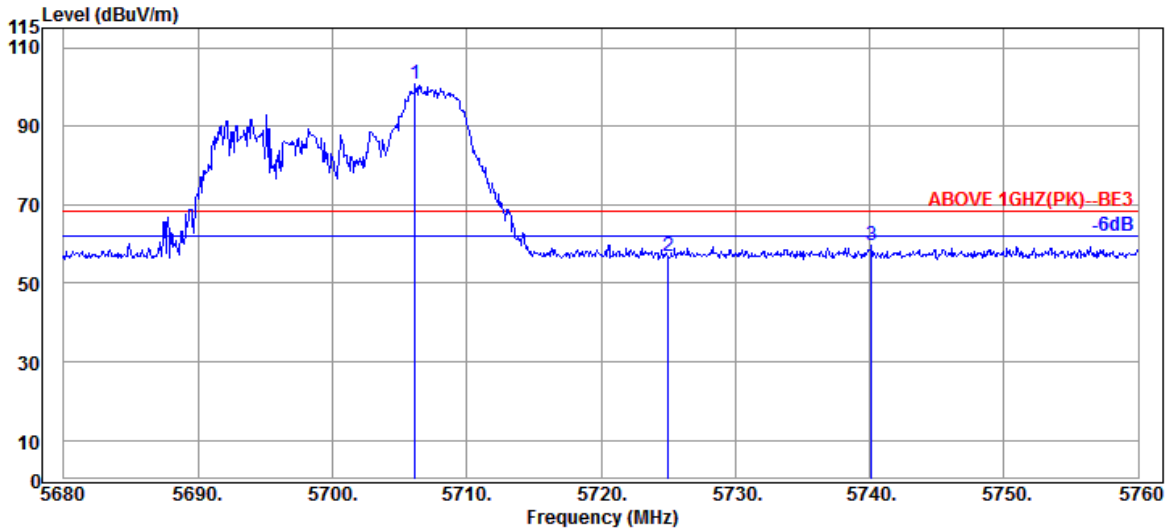

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.160	34.53	9.40	34.32	91.29	100.90	---	---	Peak
5725.040	34.67	9.42	34.32	47.26	57.03	68.20	11.17	Peak
5740.160	34.80	9.43	34.33	49.70	59.60	68.20	8.60	Peak

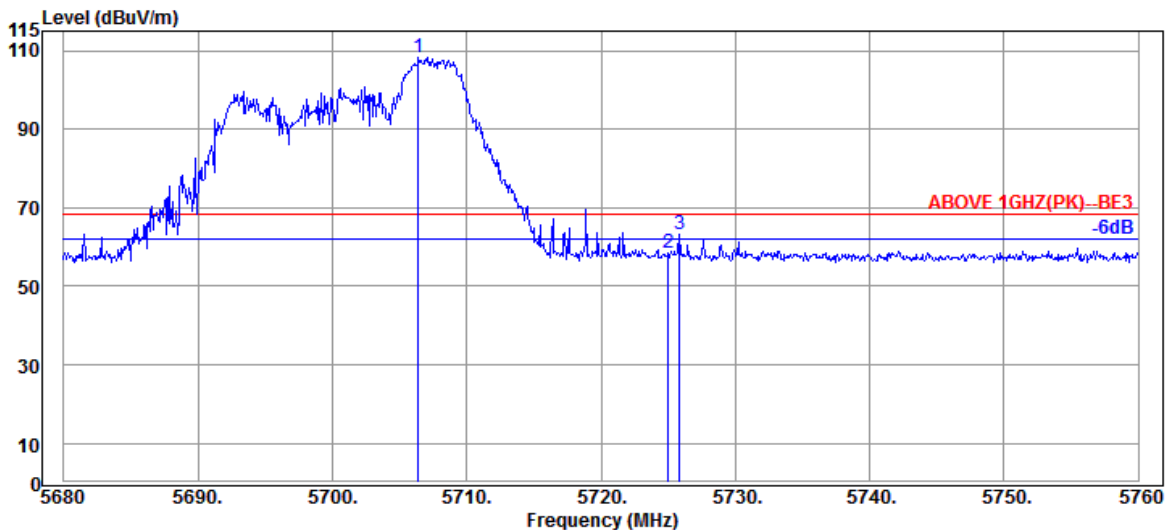


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.400	34.53	9.40	34.32	98.73	108.34	---	---	Peak
5725.040	34.67	9.42	34.32	48.56	58.33	68.20	9.87	Peak
5725.840	34.67	9.42	34.32	53.44	63.21	68.20	4.99	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

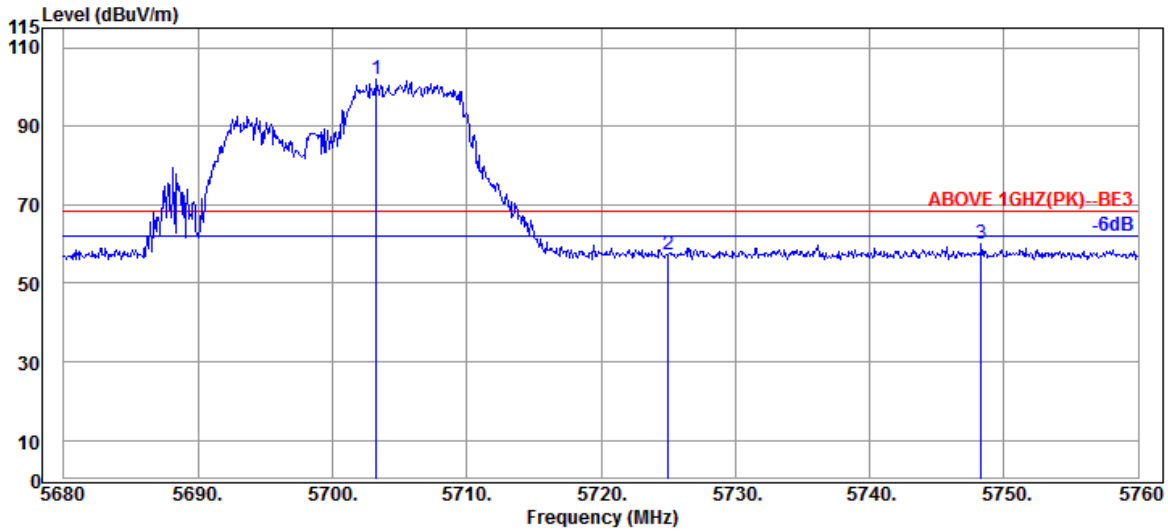

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.280	34.40	9.40	34.31	92.40	101.89	---	---	Peak
5725.040	34.67	9.42	34.32	47.42	57.19	68.20	11.01	Peak
5748.320	34.80	9.43	34.33	50.01	59.91	68.20	8.29	Peak

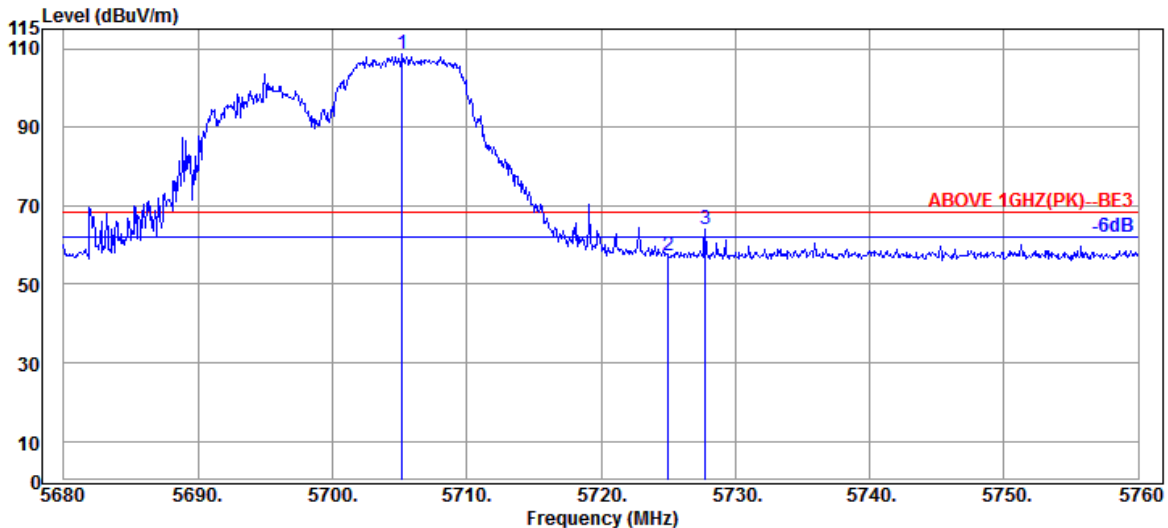


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.200	34.40	9.40	34.32	99.05	108.53	---	---	Peak
5725.040	34.67	9.42	34.32	47.70	57.47	68.20	10.73	Peak
5727.760	34.67	9.42	34.32	54.36	64.13	68.20	4.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

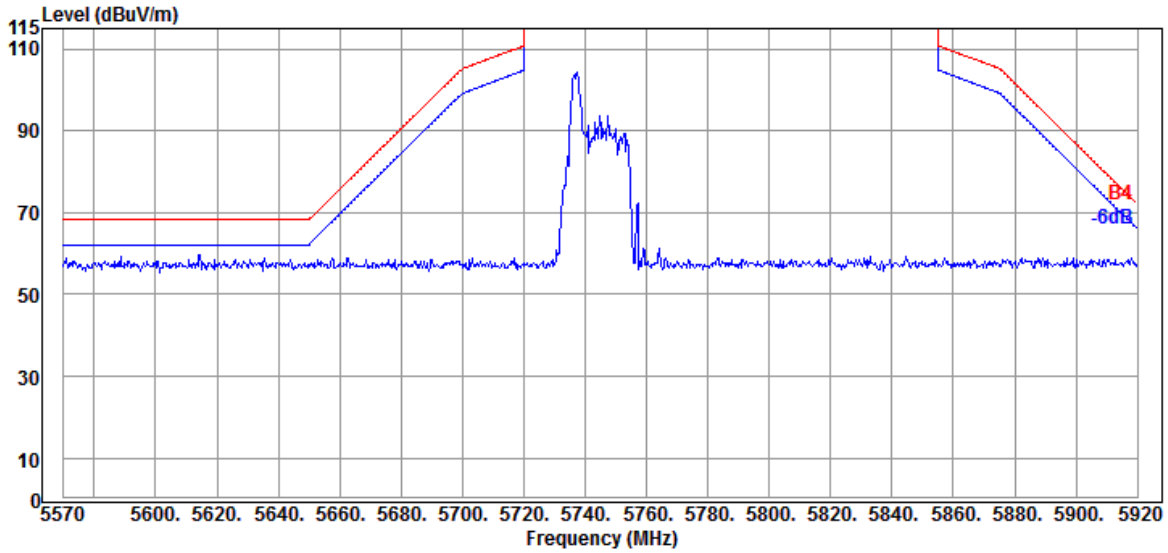


Antenna at Vertical Polarization

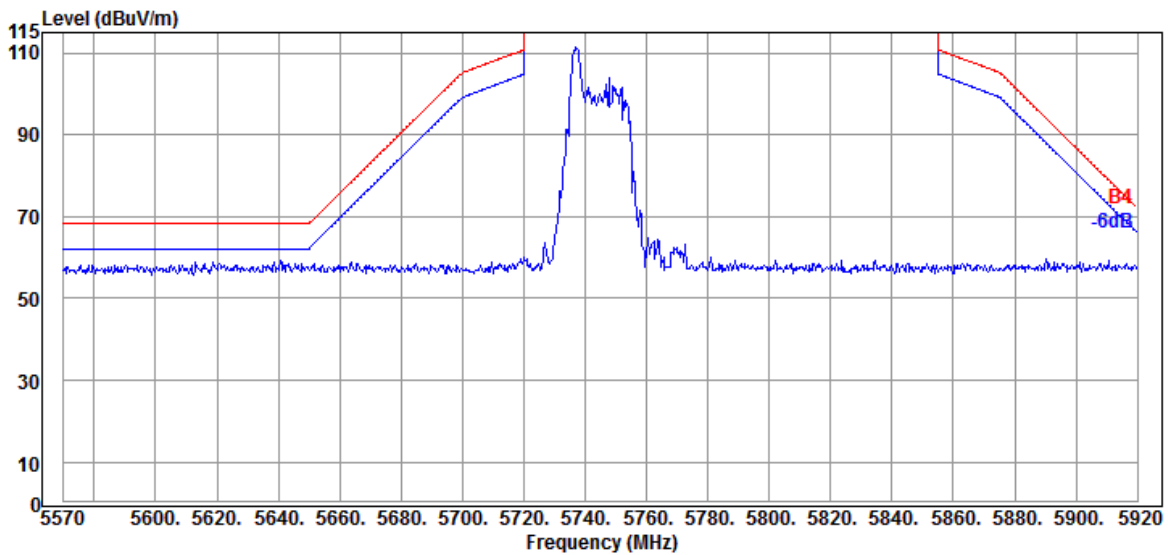


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

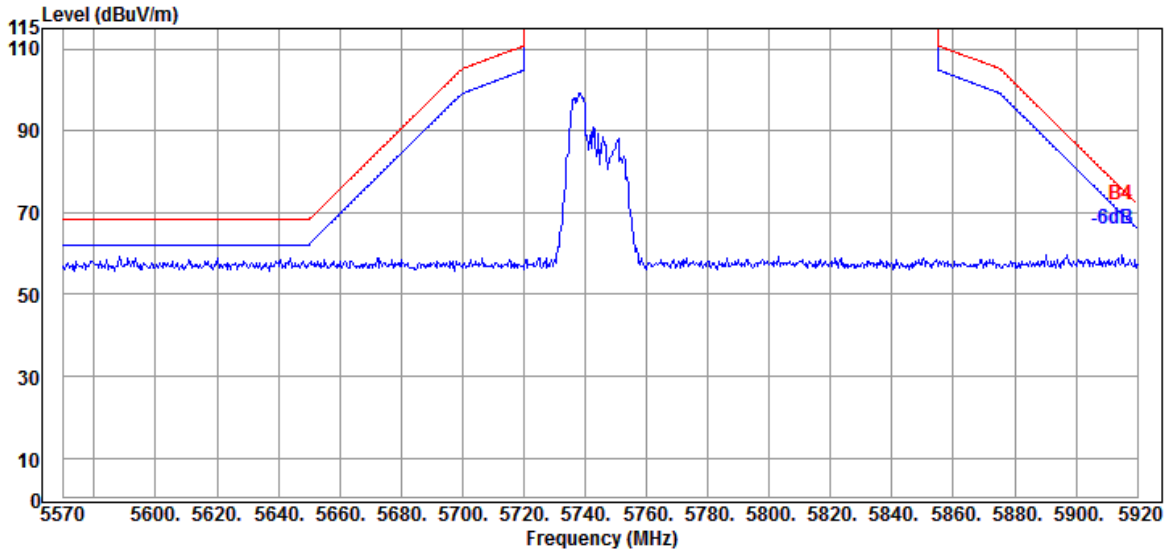


Antenna at Vertical Polarization

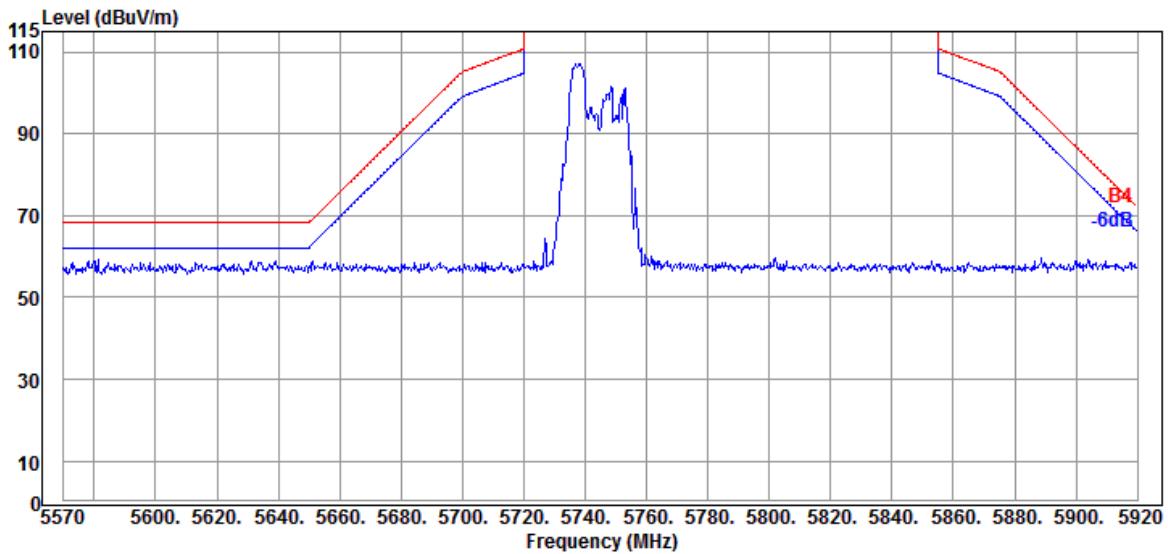


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/53	Frequency	TX 5745MHz

### Antenna at Horizontal Polarization

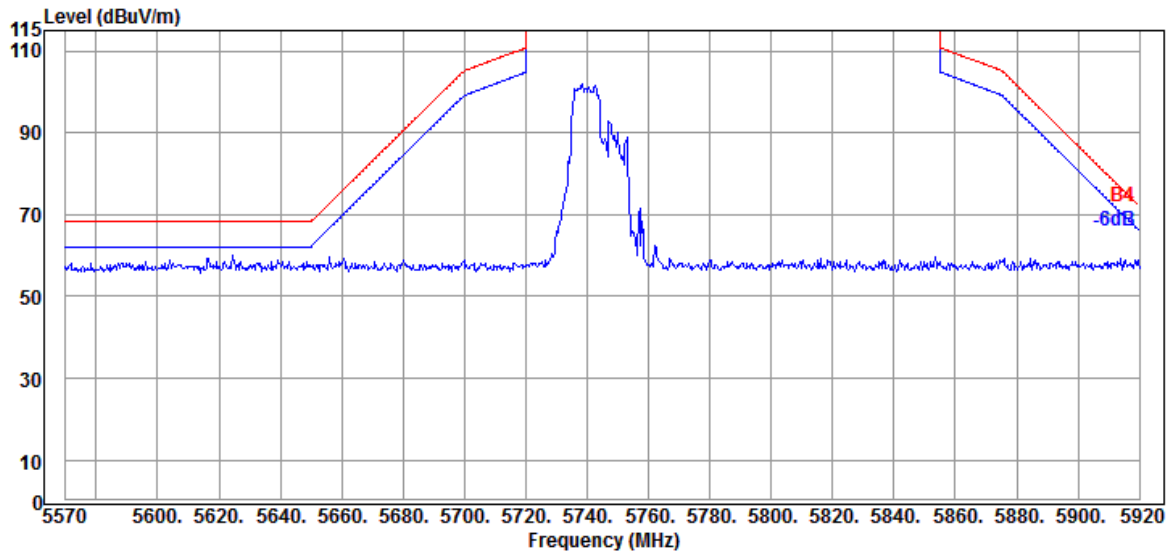


### Antenna at Vertical Polarization

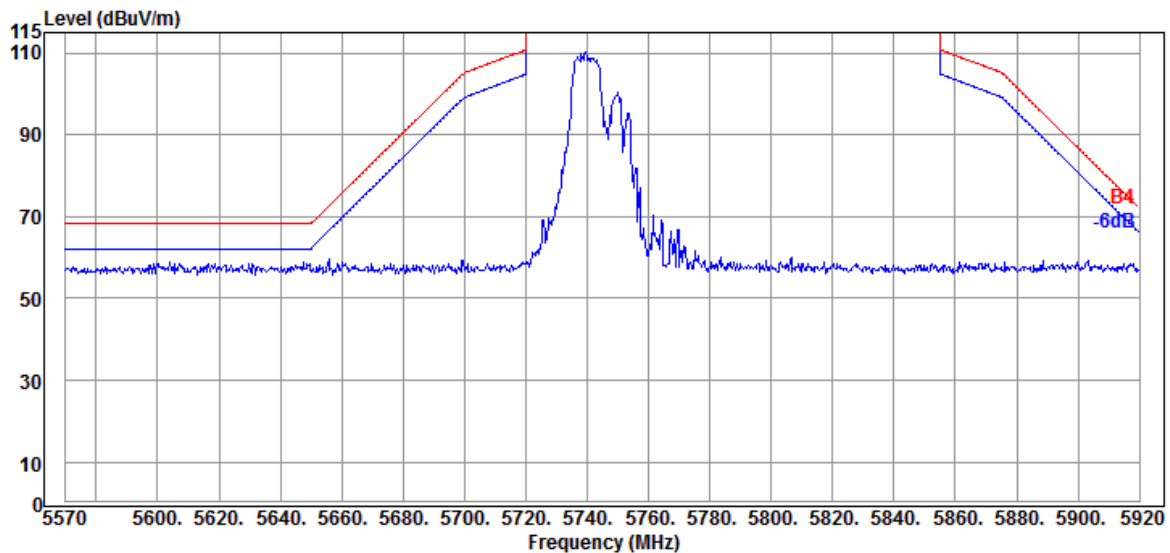


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

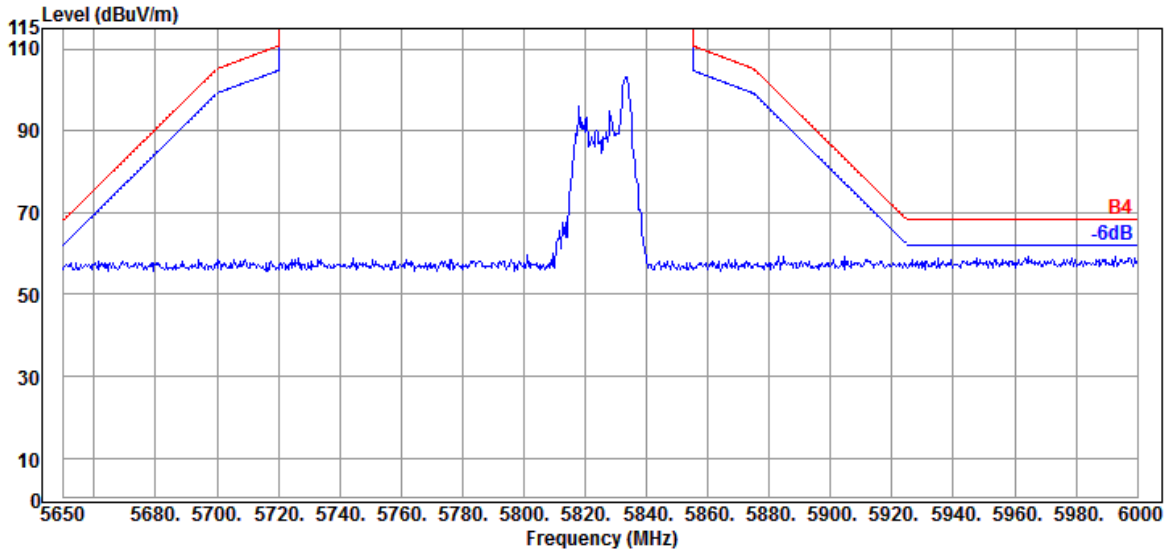


Antenna at Vertical Polarization

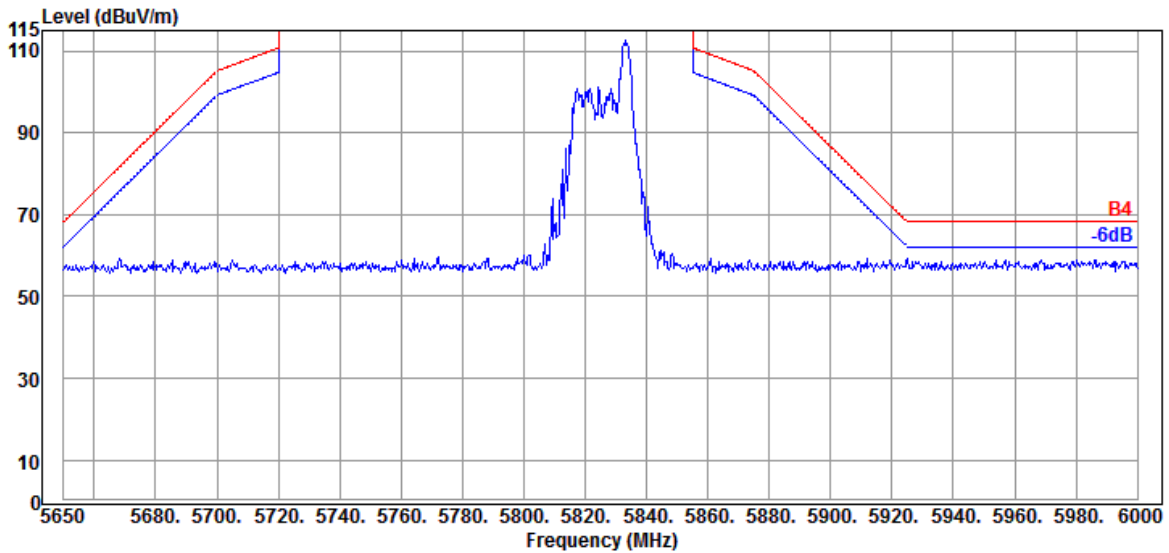




Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

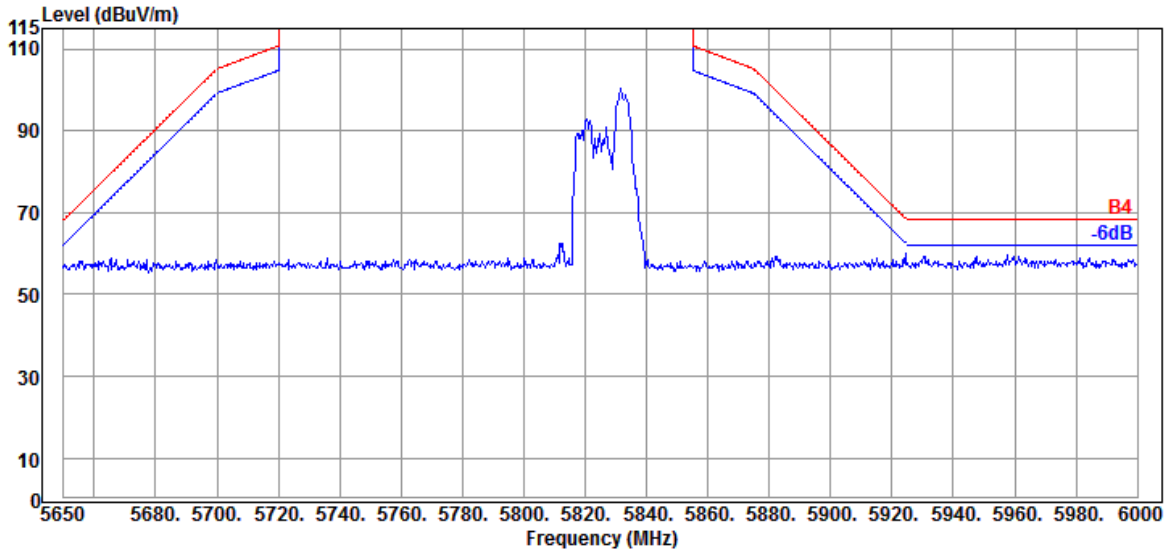


Antenna at Vertical Polarization

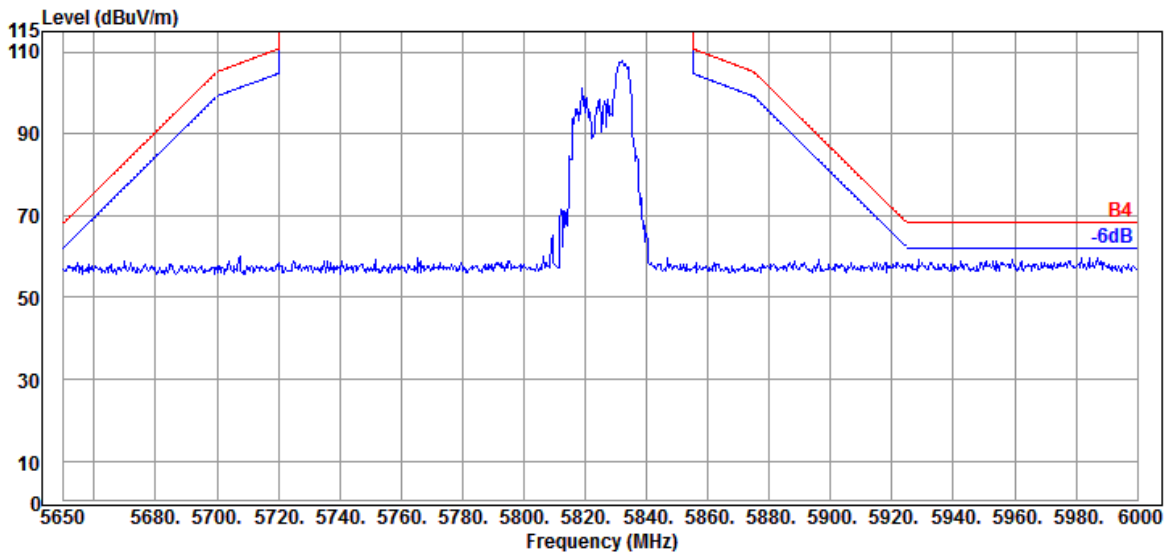


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

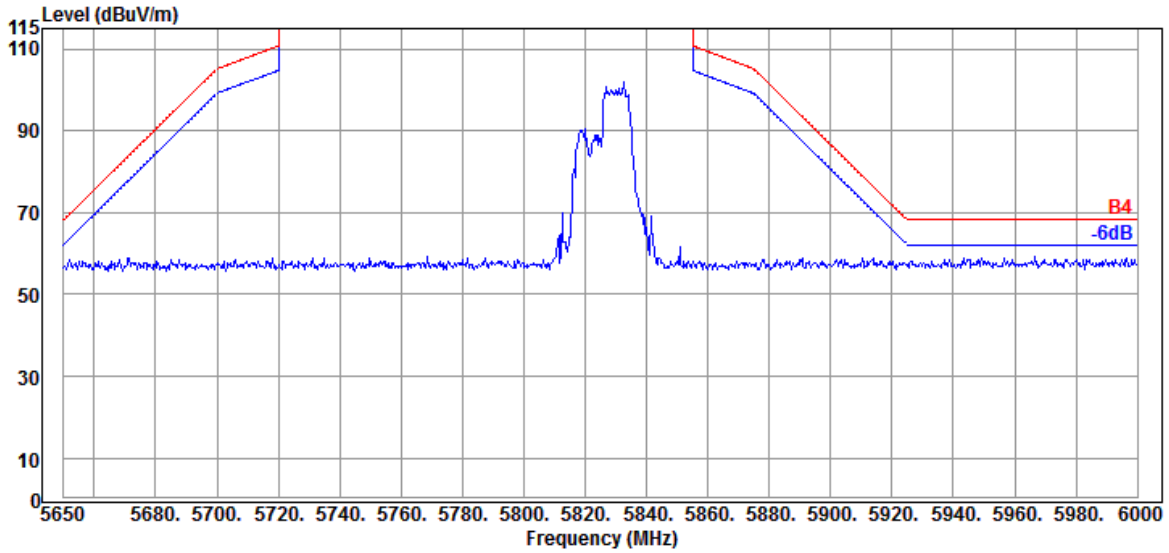

Antenna at Vertical Polarization

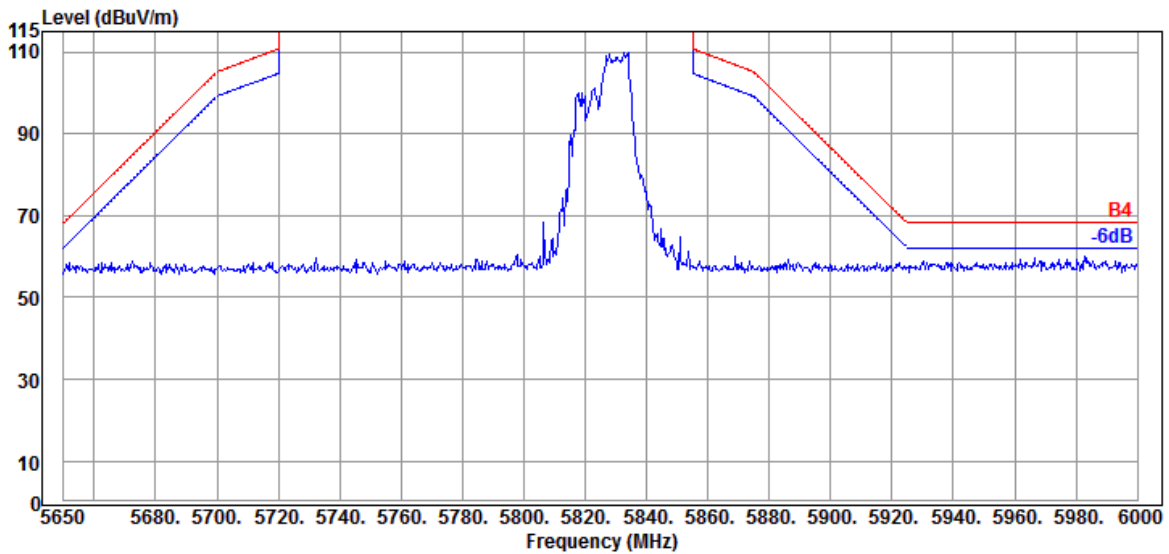


Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

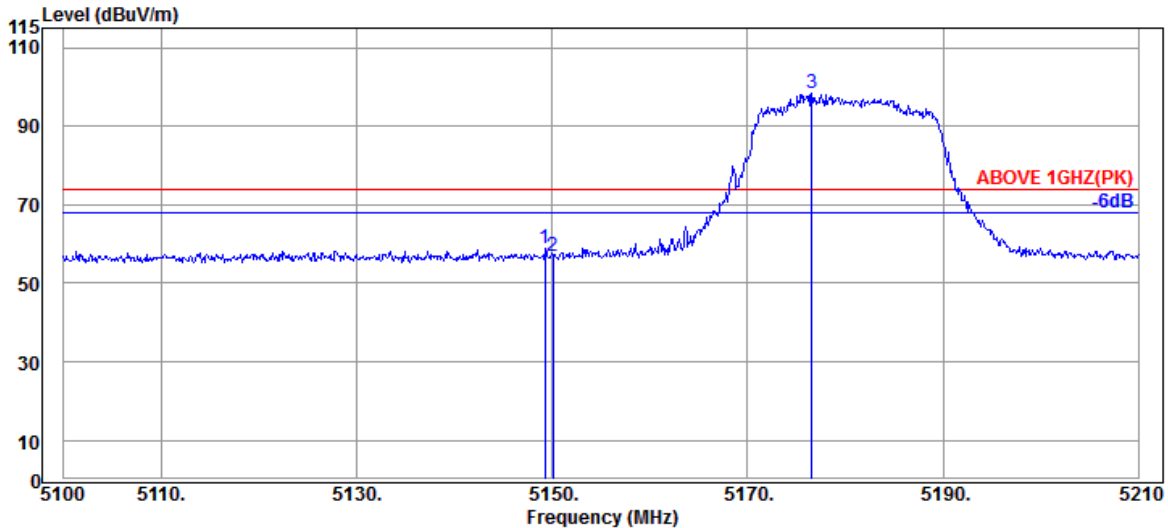

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	8.92	34.35	50.01	58.78	74.00	15.22	Peak
5150.050	34.20	8.92	34.35	48.04	56.81	74.00	17.19	Peak
@ 5176.560	34.20	8.95	34.34	89.53	98.34	---	---	Peak

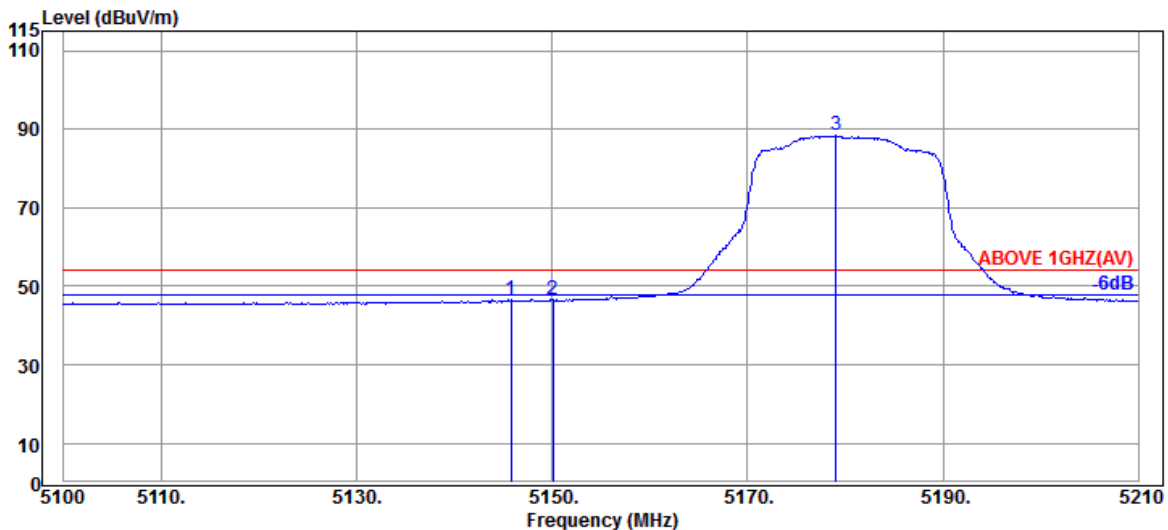


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.760	34.20	8.92	34.35	37.74	46.51	54.00	7.49	Average
5150.050	34.20	8.92	34.35	37.70	46.47	54.00	7.53	Average
@ 5179.090	34.20	8.95	34.34	79.59	88.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

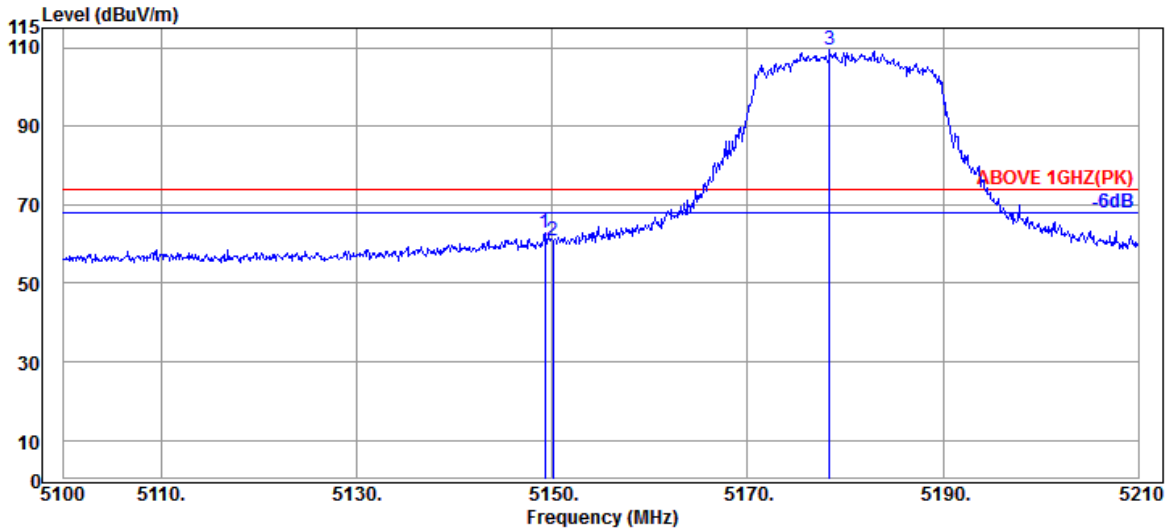

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	8.92	34.35	54.02	62.79	74.00	11.21	Peak
5150.050	34.20	8.92	34.35	52.23	61.00	74.00	13.00	Peak
@ 5178.430	34.20	8.95	34.34	100.53	109.34	---	---	Peak

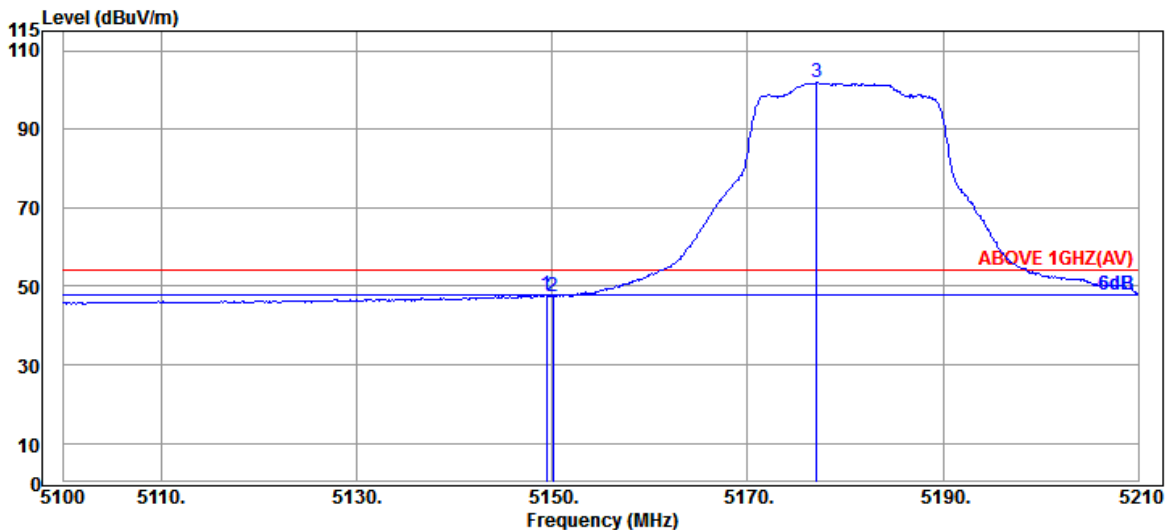


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	8.92	34.35	54.02	62.79	54.00	-8.79	Average
5150.050	34.20	8.92	34.35	52.23	61.00	54.00	-7.00	Average
@ 5178.430	34.20	8.95	34.34	100.53	109.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

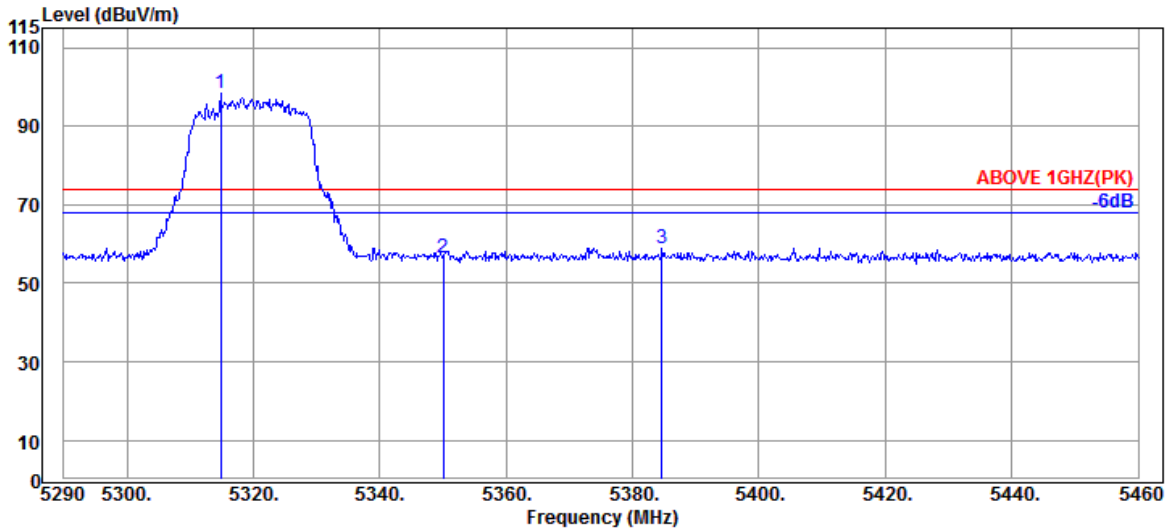

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.820	34.53	9.07	34.29	89.28	98.59	---	---	Peak
5350.010	34.60	9.10	34.27	47.26	56.69	74.00	17.31	Peak
5384.690	34.67	9.13	34.27	49.44	58.97	74.00	15.03	Peak

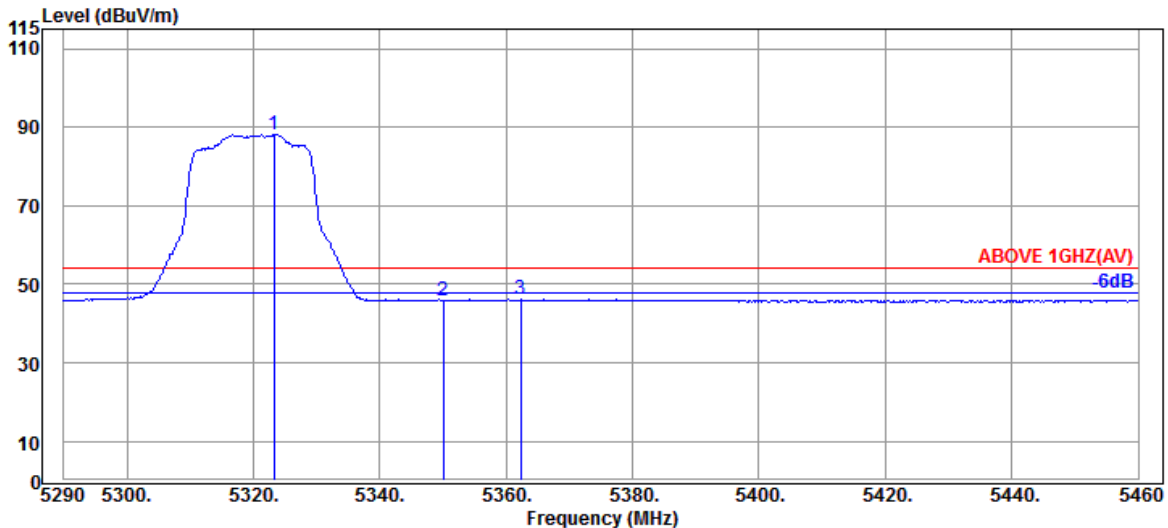


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.320	34.57	9.07	34.28	78.79	88.15	---	---	Average
5350.010	34.60	9.10	34.27	36.42	45.85	54.00	8.15	Average
5362.250	34.63	9.11	34.27	36.80	46.27	54.00	7.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

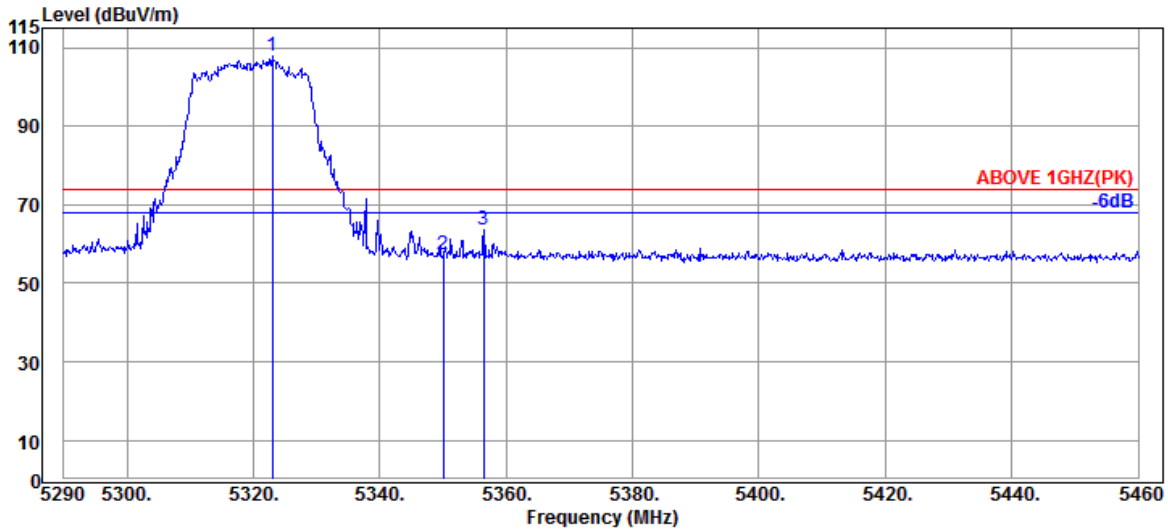

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.980	34.53	9.07	34.28	98.37	107.69	---	---	Peak
5350.010	34.60	9.10	34.27	47.98	57.41	74.00	16.59	Peak
5356.470	34.63	9.10	34.27	54.02	63.48	74.00	10.52	Peak

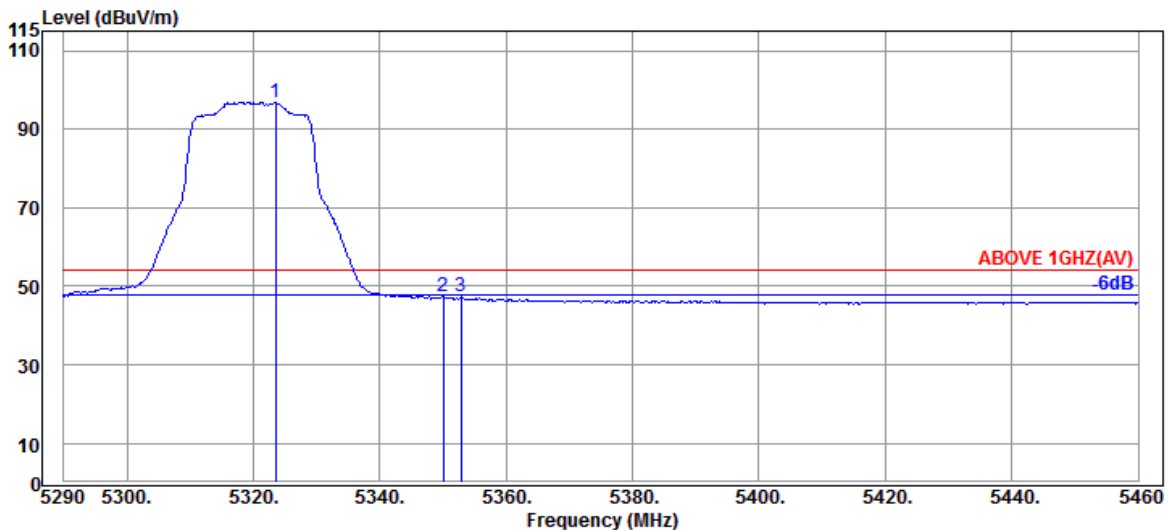


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.490	34.57	9.07	34.28	87.48	96.84	---	---	Average
5350.010	34.60	9.10	34.27	37.99	47.42	54.00	6.58	Average
5352.900	34.60	9.10	34.27	37.80	47.23	54.00	6.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

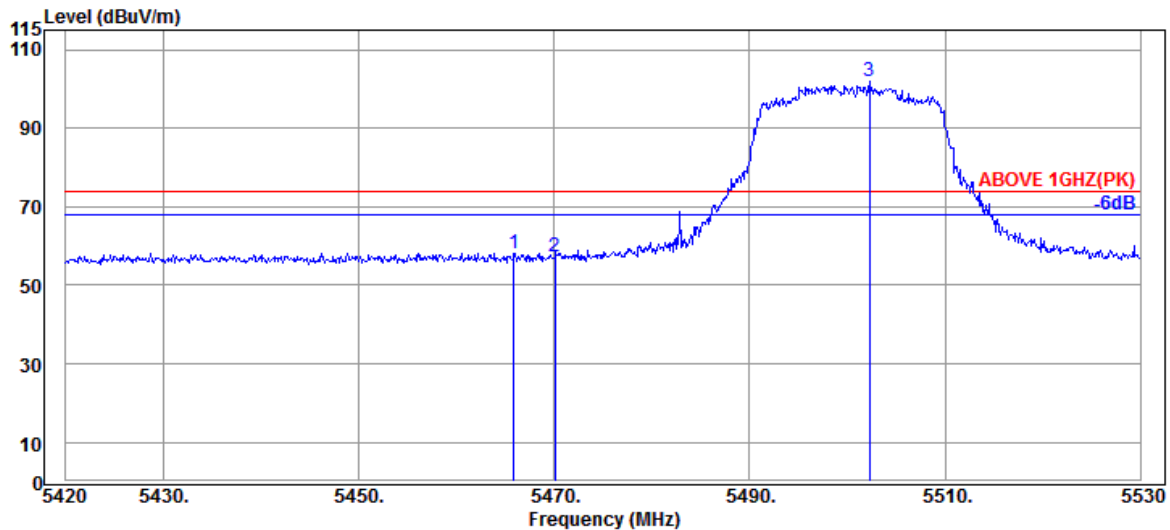

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.870	34.47	9.20	34.24	48.85	58.28	74.00	15.72	Peak
5470.050	34.47	9.20	34.24	47.91	57.34	74.00	16.66	Peak
@ 5502.280	34.40	9.23	34.24	92.51	101.90	---	---	Peak

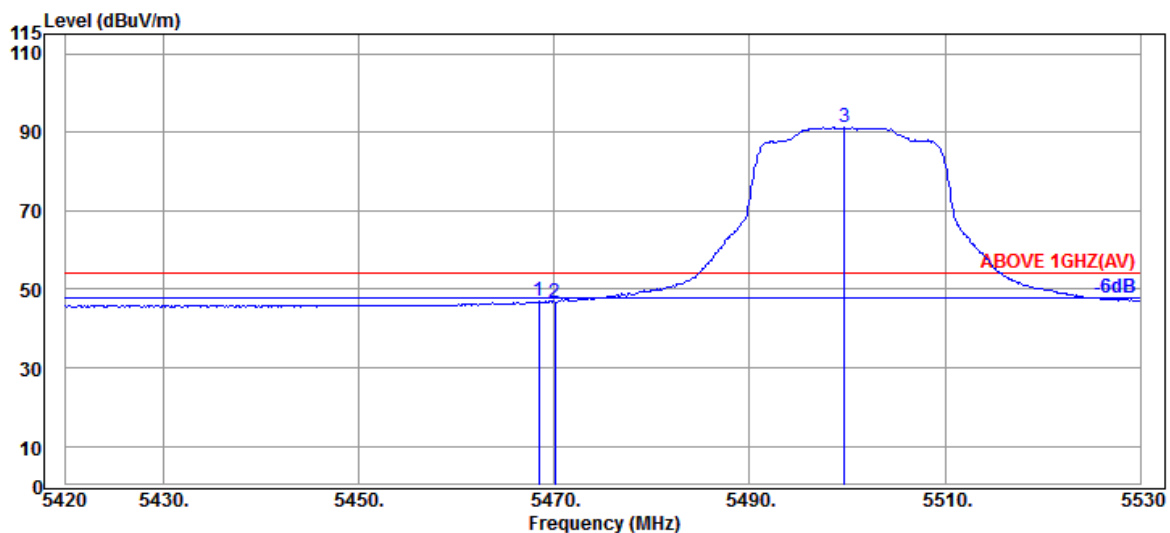


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.47	9.20	34.24	37.48	46.91	54.00	7.09	Average
5470.050	34.47	9.20	34.24	37.36	46.79	54.00	7.21	Average
@ 5499.750	34.40	9.23	34.23	81.79	91.19	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

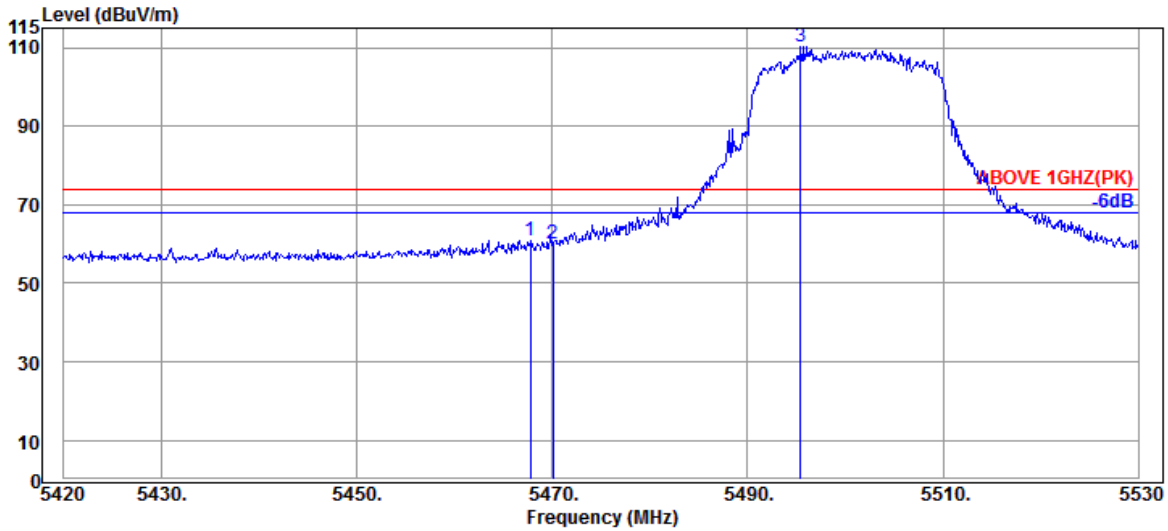

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.740	34.47	9.20	34.24	51.59	61.02	74.00	12.98	Peak
5470.050	34.47	9.20	34.24	50.62	60.05	74.00	13.95	Peak
@ 5495.460	34.40	9.21	34.23	100.86	110.24	---	---	Peak

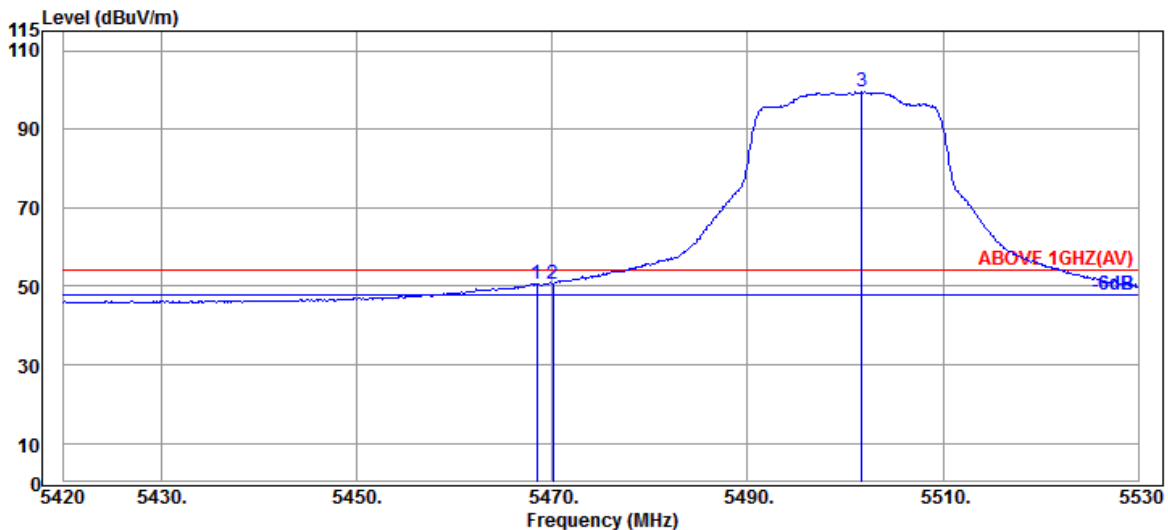


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.47	9.20	34.24	41.28	50.71	54.00	3.29	Average
5470.050	34.47	9.20	34.24	41.28	50.71	54.00	3.29	Average
@ 5501.730	34.40	9.23	34.24	90.14	99.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

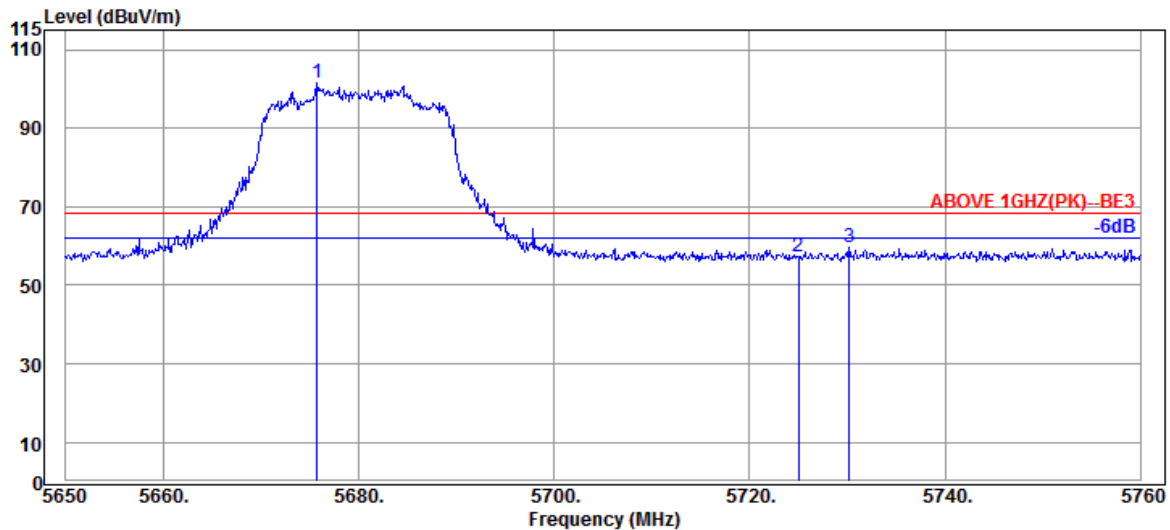

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.740	34.40	9.37	34.30	92.28	101.75	---	---	Peak
5725.020	34.67	9.42	34.32	47.60	57.37	68.20	10.83	Peak
5730.190	34.67	9.42	34.32	49.90	59.67	68.20	8.53	Peak

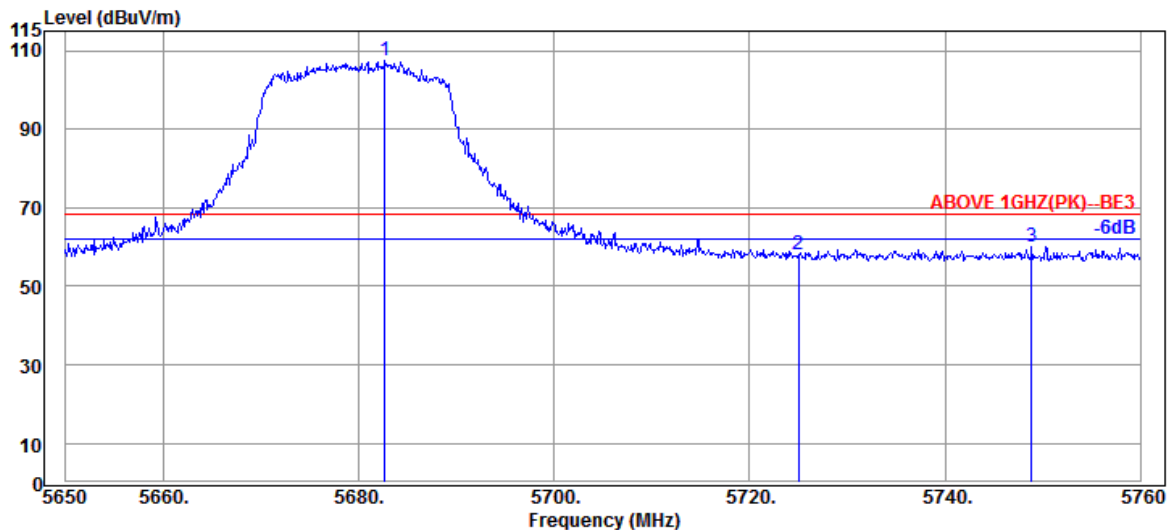


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.670	34.40	9.37	34.31	97.86	107.32	---	---	Peak
5725.020	34.67	9.42	34.32	48.19	57.96	68.20	10.24	Peak
5748.890	34.80	9.43	34.33	50.16	60.06	68.20	8.14	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

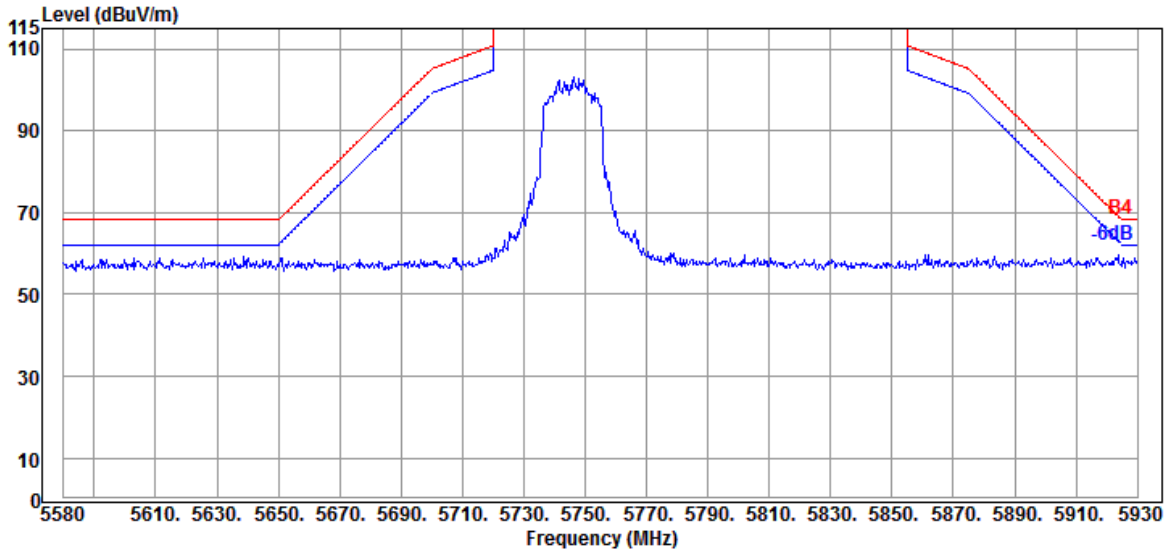


Antenna at Vertical Polarization

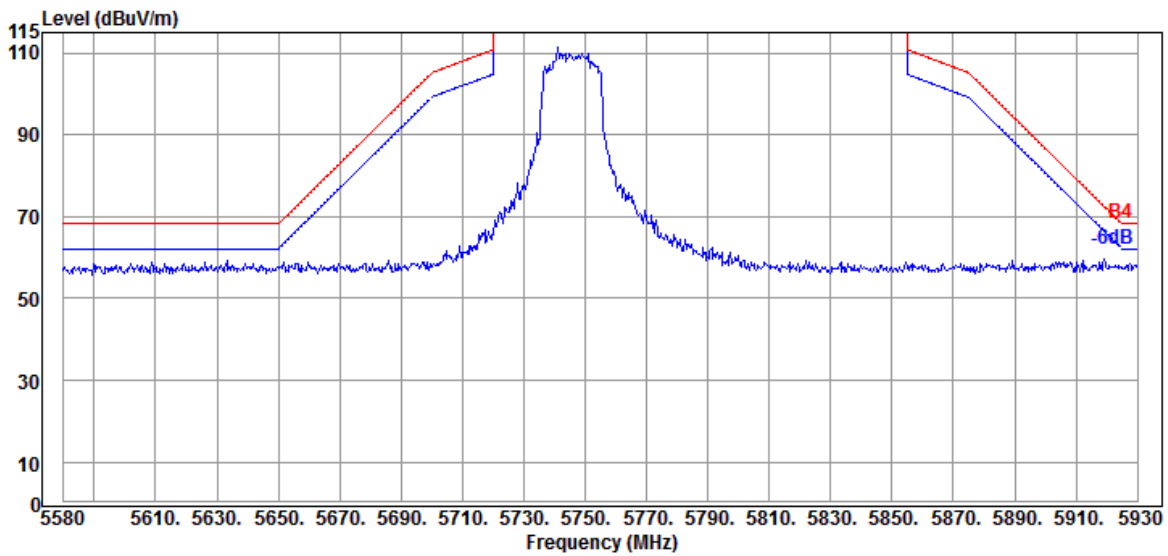


Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

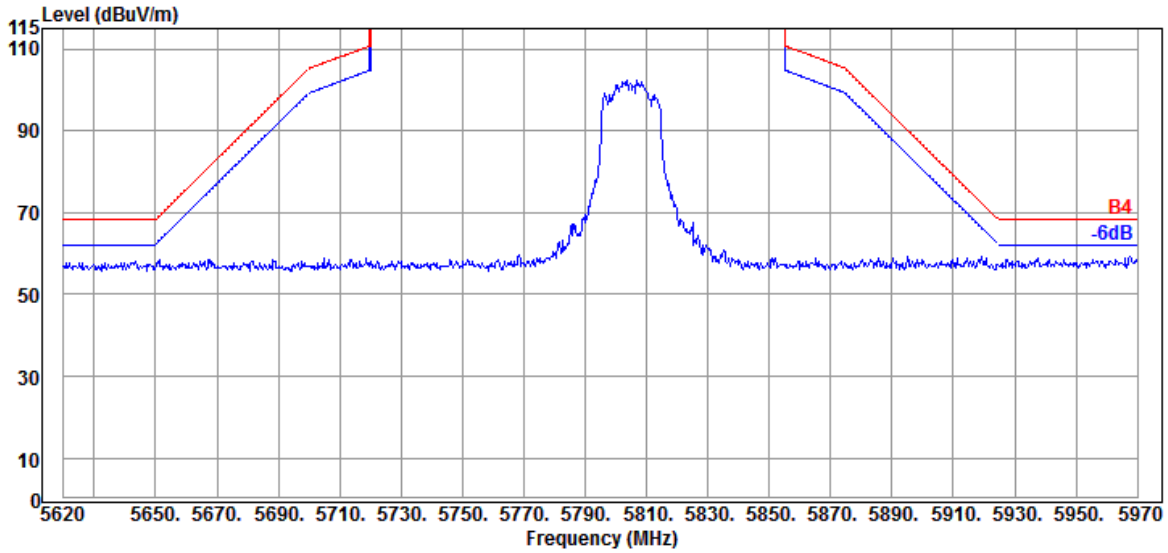

Antenna at Vertical Polarization

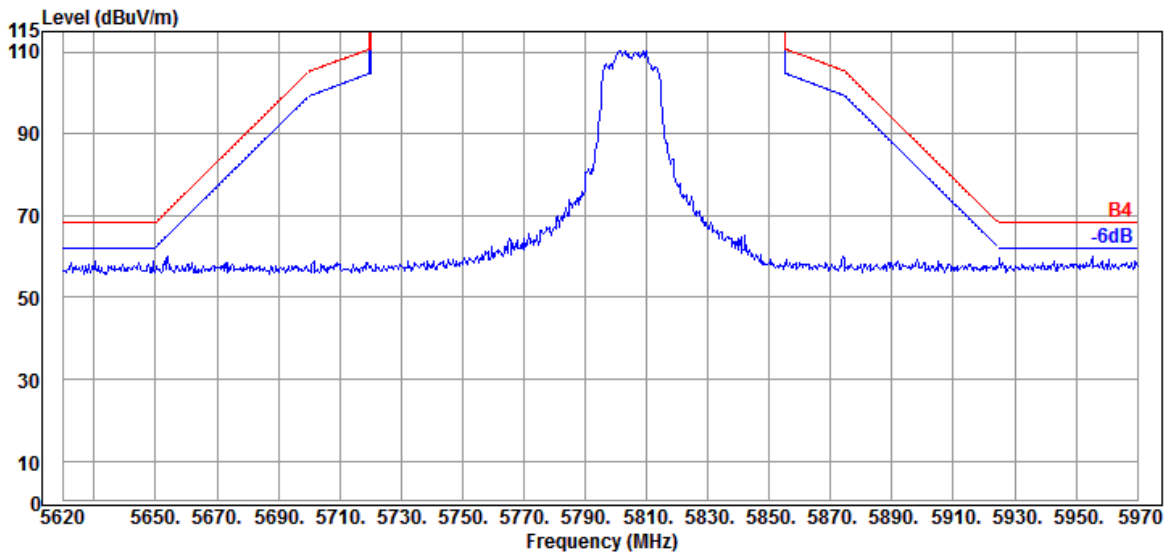


Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

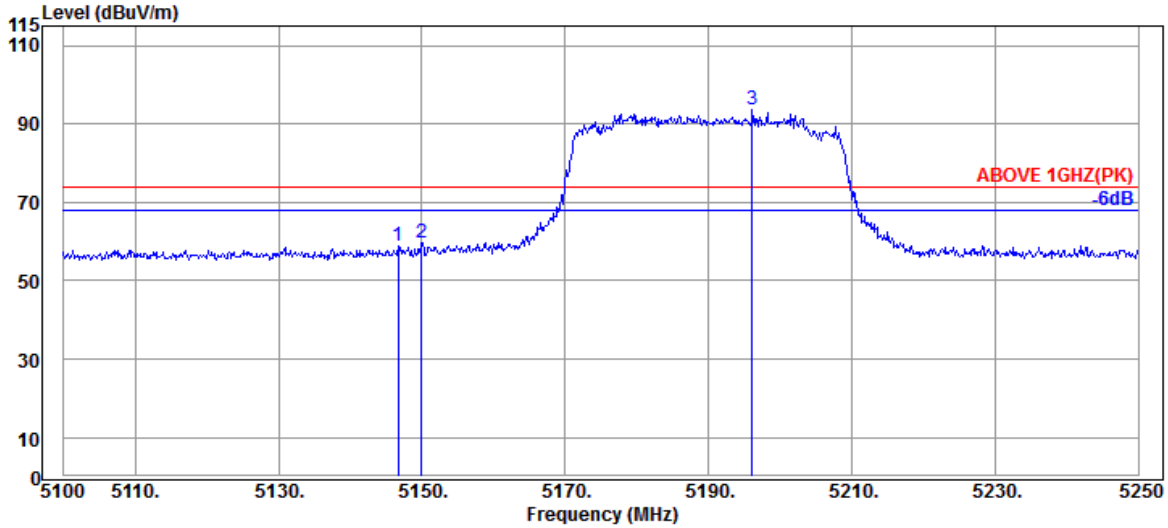

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.650	34.20	8.92	34.35	50.23	59.00	74.00	15.00	Peak
5149.950	34.20	8.92	34.35	51.09	59.86	74.00	14.14	Peak
@ 5196.150	34.20	8.96	34.33	84.86	93.69	---	---	Peak

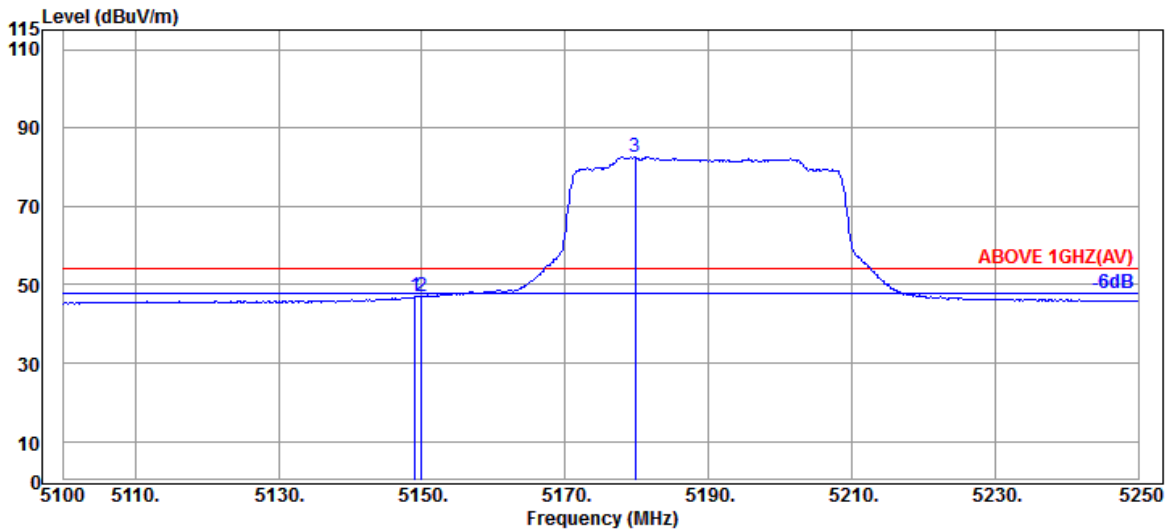


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.20	8.92	34.35	38.29	47.06	54.00	6.94	Average
5149.950	34.20	8.92	34.35	38.30	47.07	54.00	6.93	Average
@ 5179.800	34.20	8.95	34.34	73.74	82.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

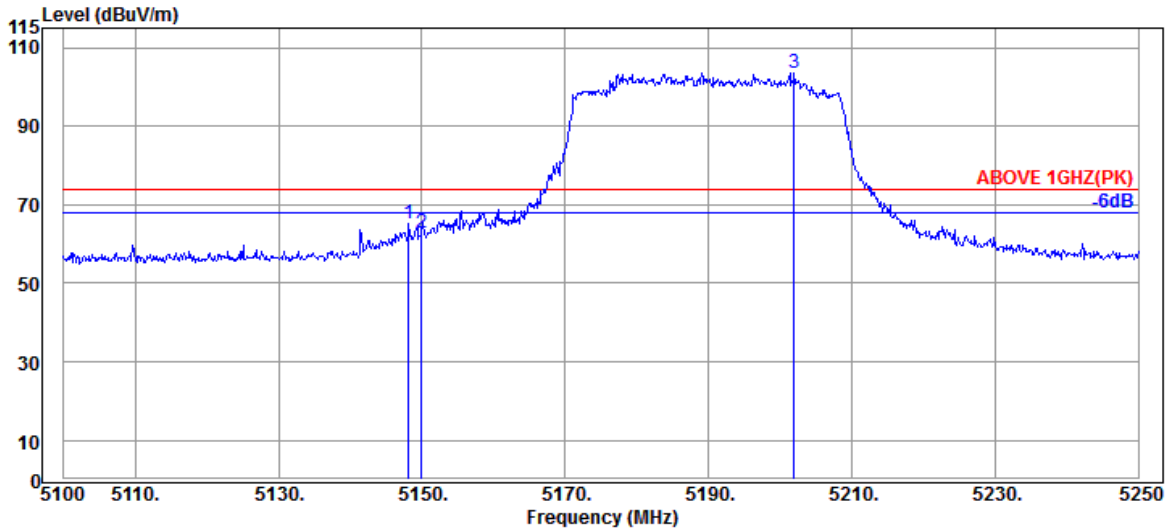

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	34.20	8.92	34.35	56.27	65.04	74.00	8.96	Peak
5149.950	34.20	8.92	34.35	54.26	63.03	74.00	10.97	Peak
@ 5202.000	34.25	8.96	34.33	94.68	103.56	---	---	Peak

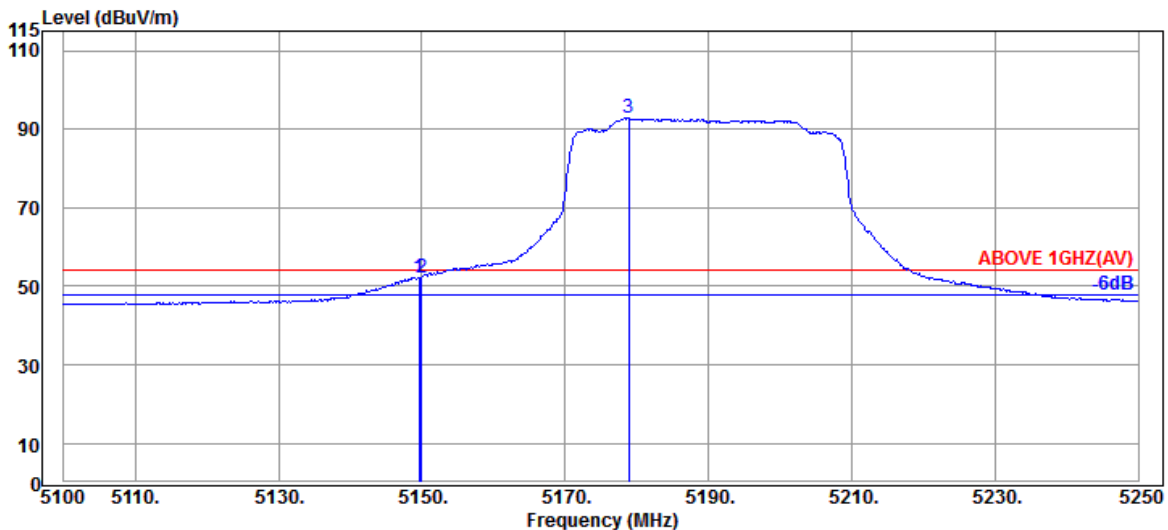


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	34.35	43.43	52.20	54.00	1.80	Average
5149.950	34.20	8.92	34.35	43.58	52.35	54.00	1.65	Average
@ 5178.900	34.20	8.95	34.34	84.05	92.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

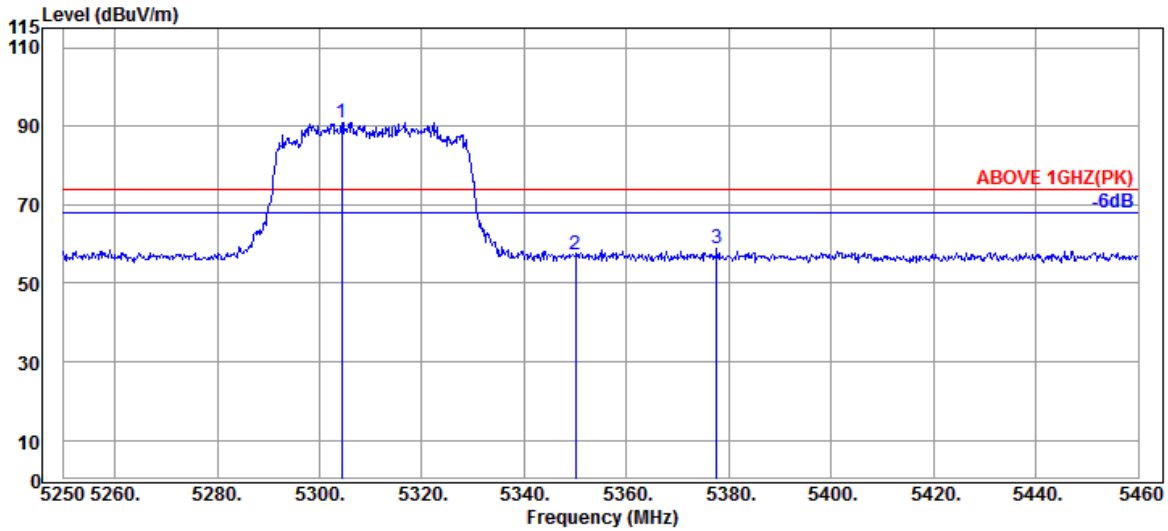

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.390	34.50	9.05	34.29	81.82	91.08	---	---	Peak
5349.960	34.60	9.10	34.27	47.99	57.42	74.00	16.58	Peak
5377.680	34.67	9.13	34.27	49.53	59.06	74.00	14.94	Peak

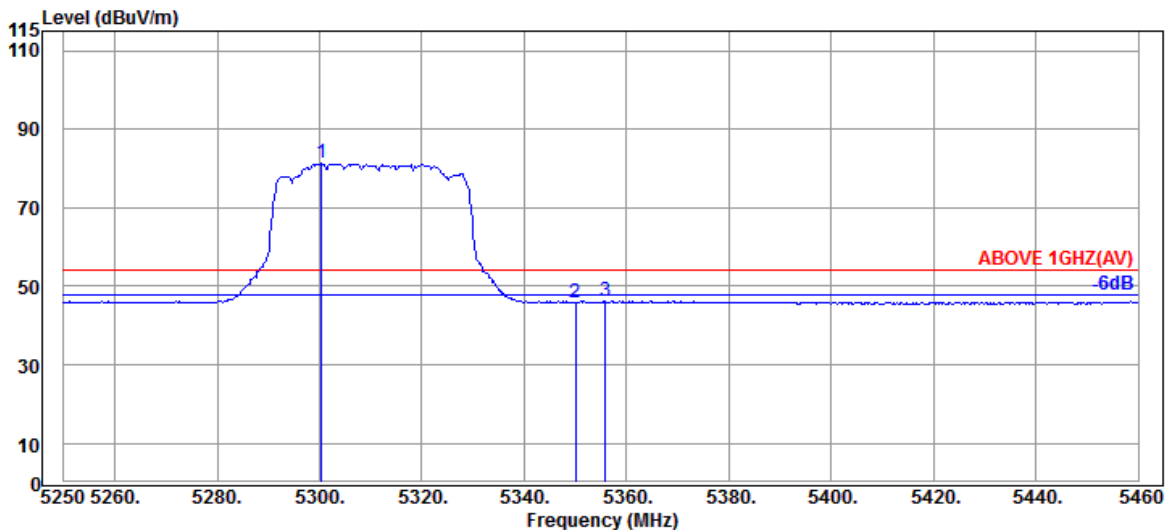


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.50	9.05	34.29	72.04	81.30	---	---	Average
5349.960	34.60	9.10	34.27	36.41	45.84	54.00	8.16	Average
5355.840	34.63	9.10	34.27	36.77	46.23	54.00	7.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

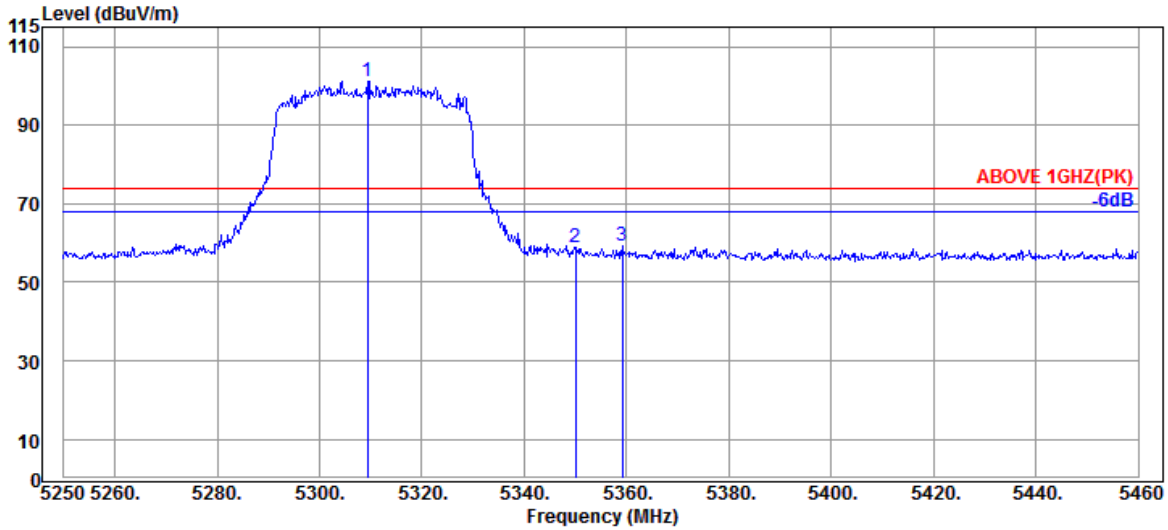

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.430	34.53	9.05	34.29	91.98	101.27	---	---	Peak
5349.960	34.60	9.10	34.27	49.26	58.69	74.00	15.31	Peak
5359.200	34.63	9.10	34.27	49.66	59.12	74.00	14.88	Peak

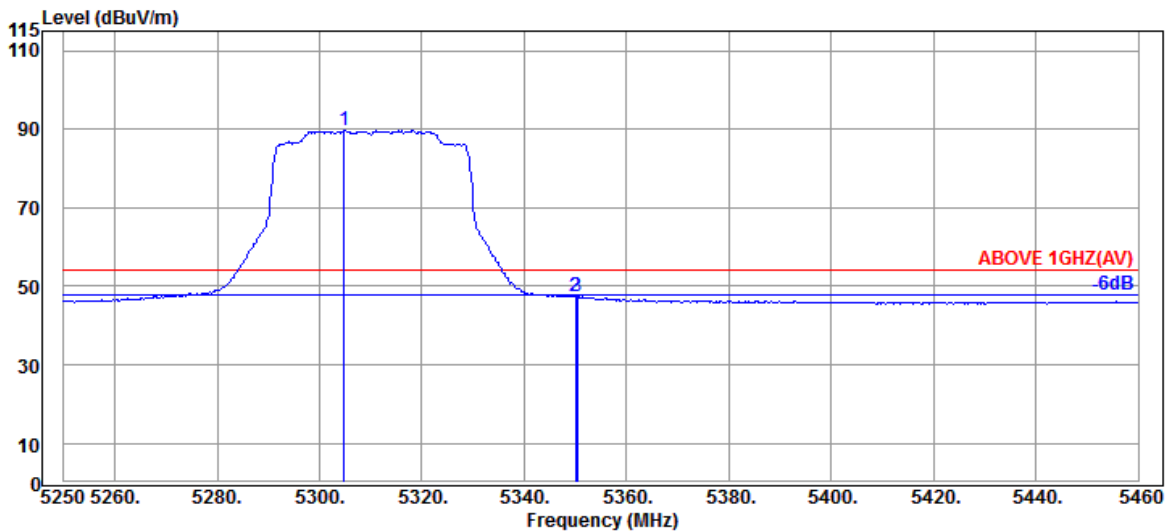


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.810	34.50	9.05	34.29	80.37	89.63	---	---	Average
5349.960	34.60	9.10	34.27	37.86	47.29	54.00	6.71	Average
5350.380	34.60	9.10	34.27	37.93	47.36	54.00	6.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

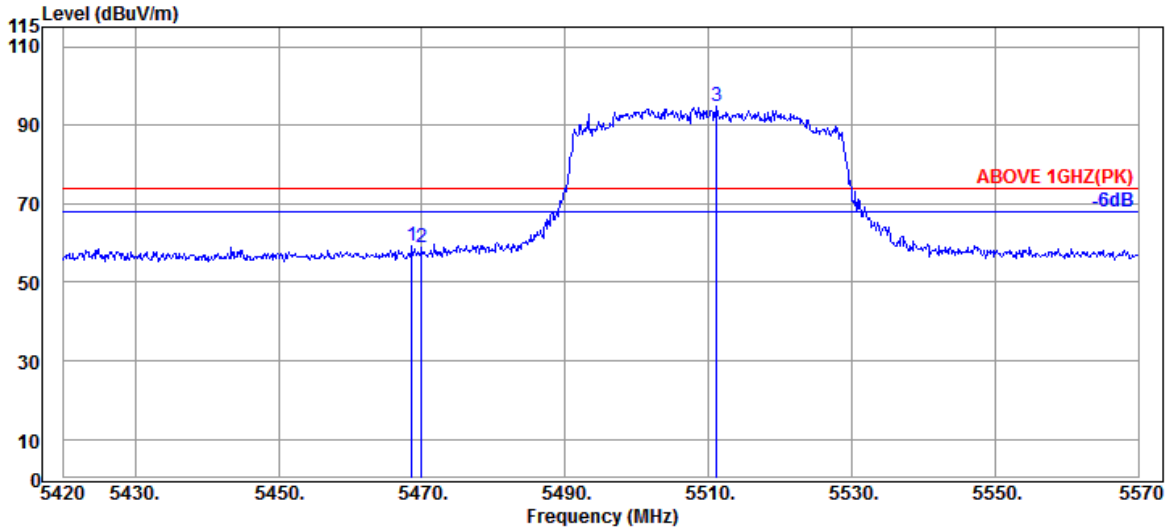

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.47	9.20	34.24	49.75	59.18	74.00	14.82	Peak
5469.950	34.47	9.20	34.24	49.30	58.73	74.00	15.27	Peak
@ 5511.200	34.37	9.23	34.24	85.45	94.81	---	---	Peak

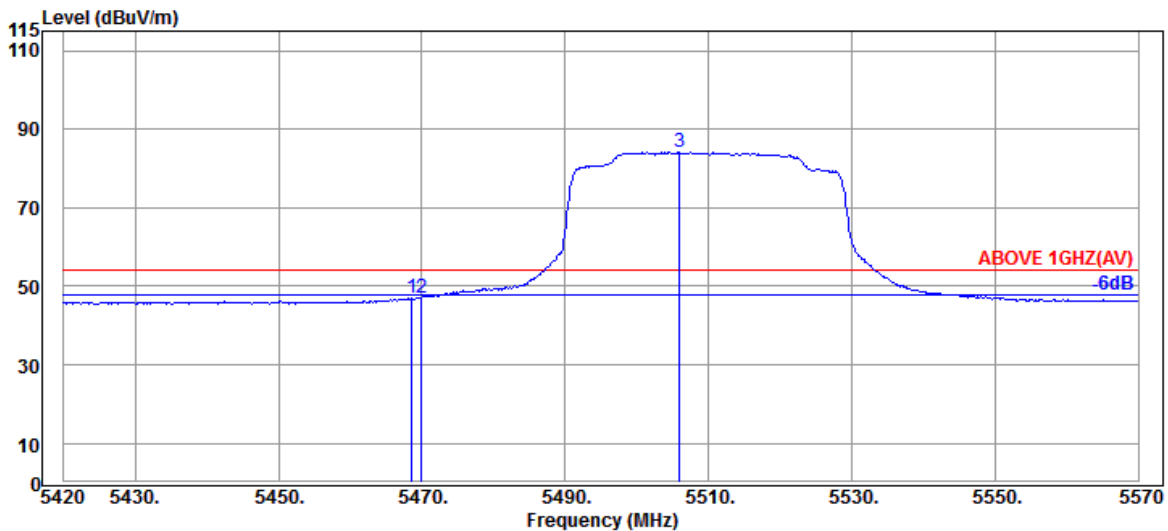


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.47	9.20	34.24	37.51	46.94	54.00	7.06	Average
5469.950	34.47	9.20	34.24	37.61	47.04	54.00	6.96	Average
@ 5505.950	34.40	9.23	34.24	74.79	84.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

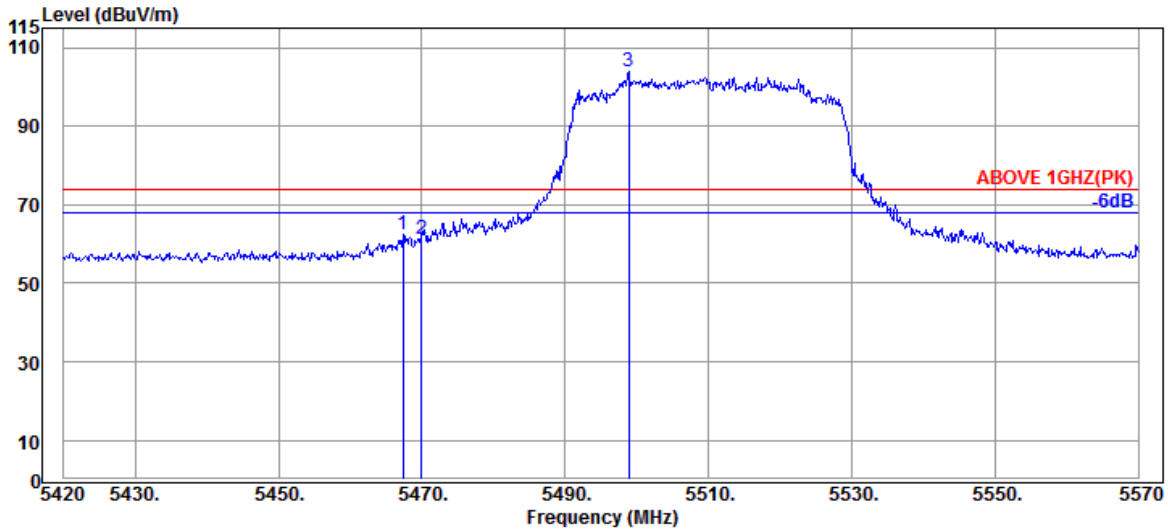

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.47	9.20	34.24	53.01	62.44	74.00	11.56	Peak
5469.950	34.47	9.20	34.24	51.65	61.08	74.00	12.92	Peak
@ 5498.900	34.40	9.23	34.23	94.69	104.09	---	---	Peak

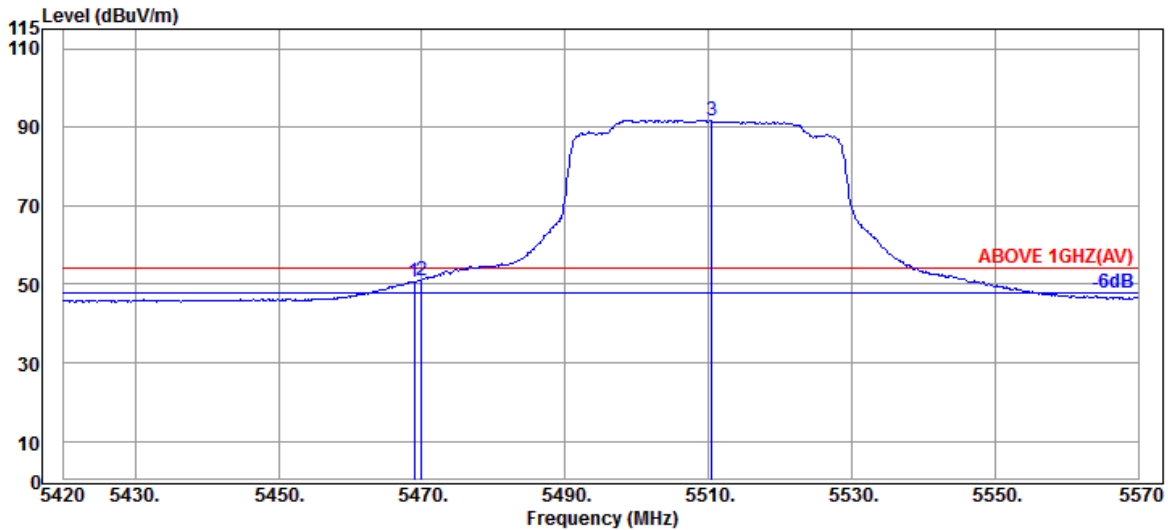


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	41.31	50.74	54.00	3.26	Average
5469.950	34.47	9.20	34.24	41.70	51.13	54.00	2.87	Average
@ 5510.450	34.40	9.23	34.24	82.33	91.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

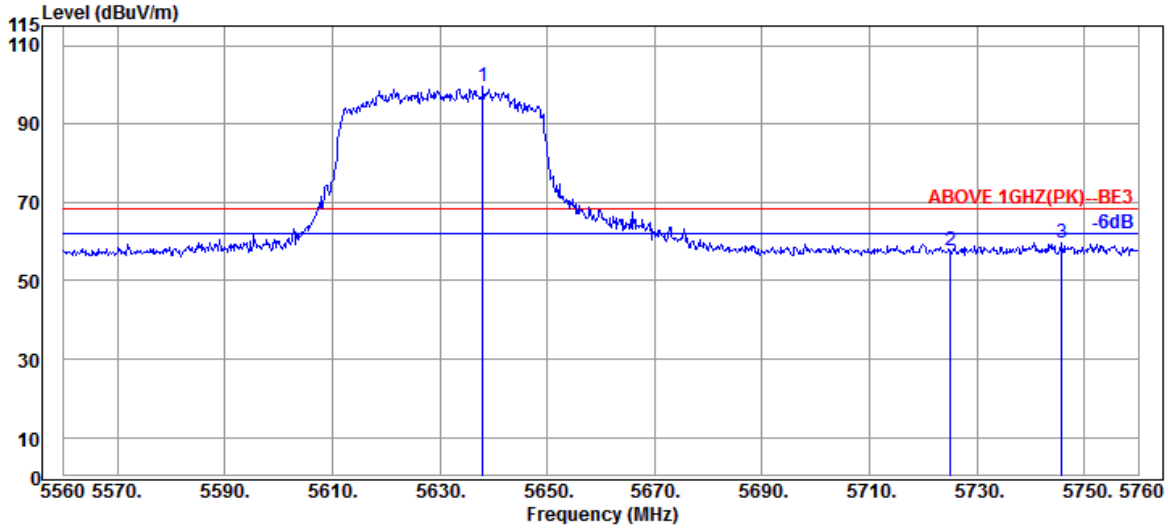

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5638.000	34.40	9.34	34.29	89.98	99.43	---	---	Peak
5725.000	34.67	9.42	34.32	47.78	57.55	68.20	10.65	Peak
5745.800	34.80	9.43	34.33	49.96	59.86	68.20	8.34	Peak

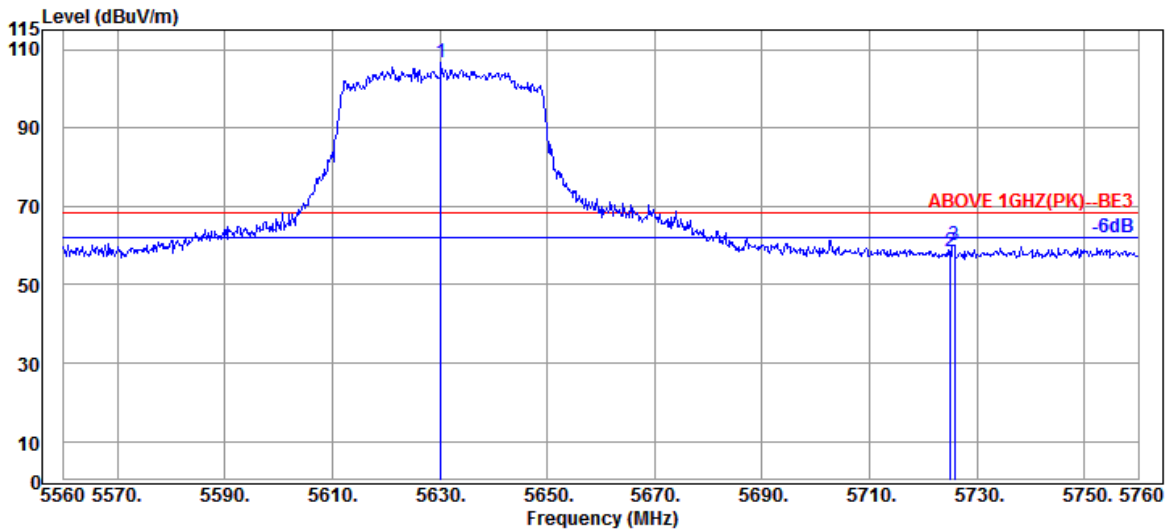


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.200	34.40	9.33	34.29	97.17	106.61	---	---	Peak
5725.000	34.67	9.42	34.32	48.79	58.56	68.20	9.64	Peak
5725.800	34.67	9.42	34.32	50.49	60.26	68.20	7.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

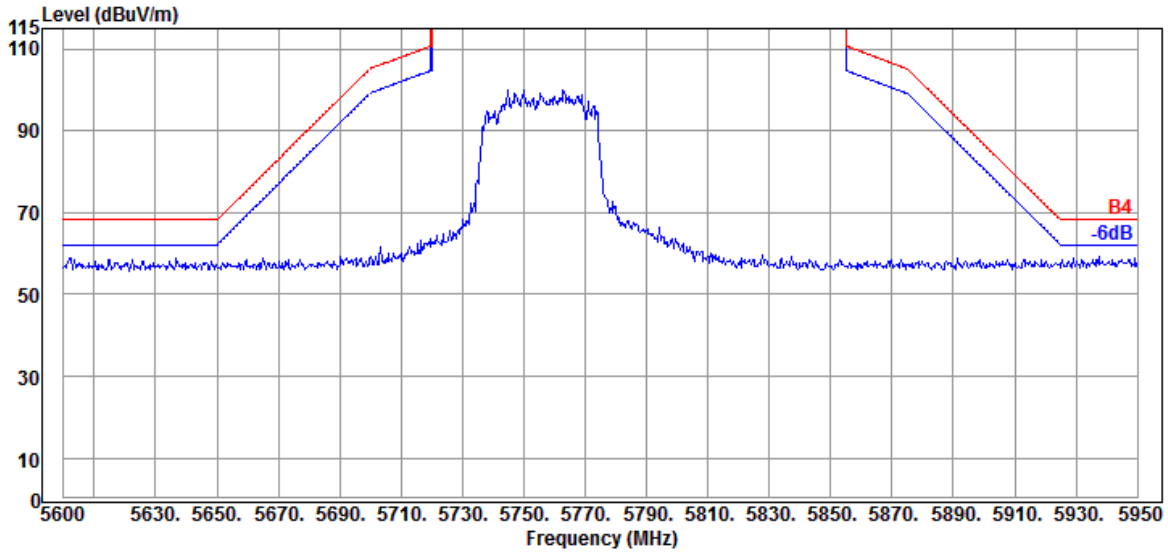


Antenna at Vertical Polarization

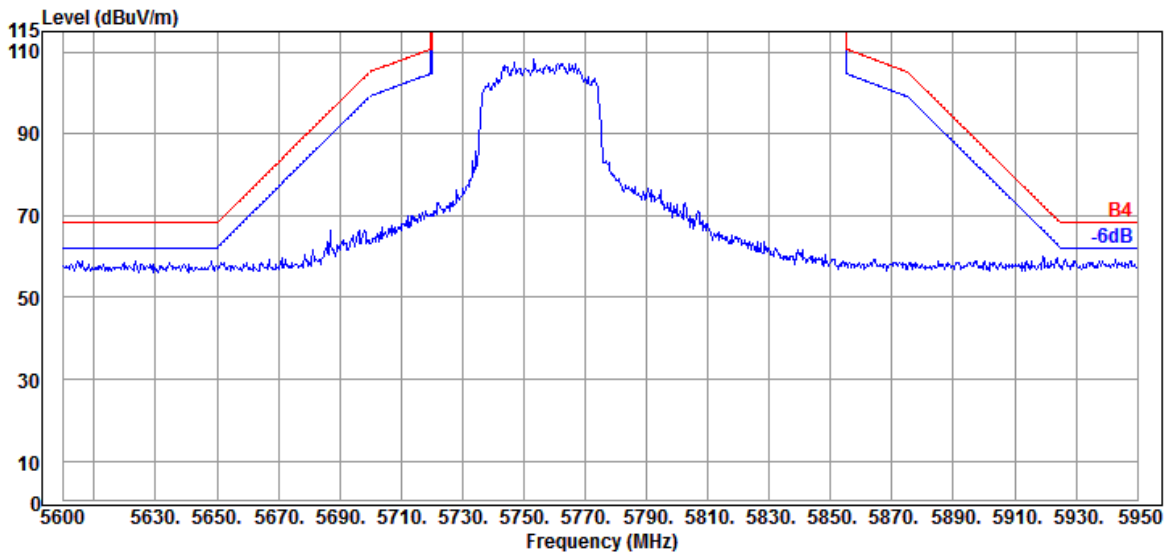


Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

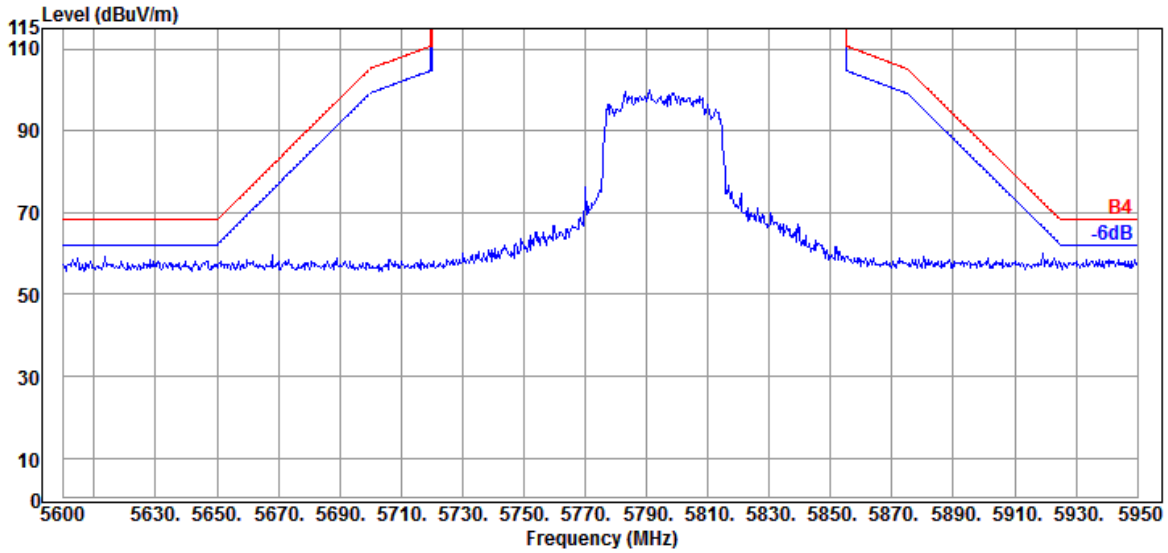

Antenna at Vertical Polarization

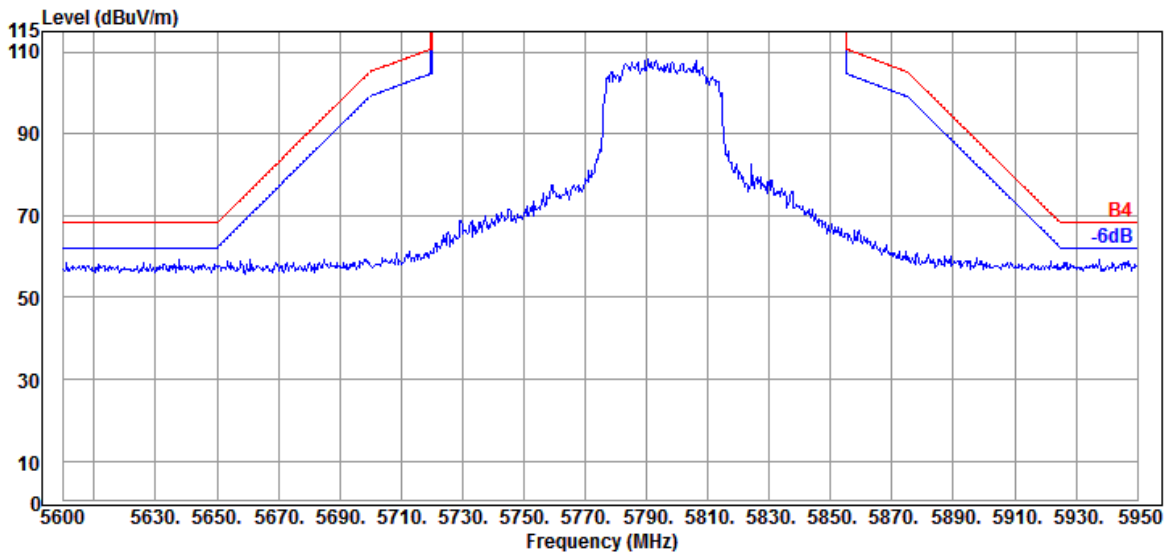


Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

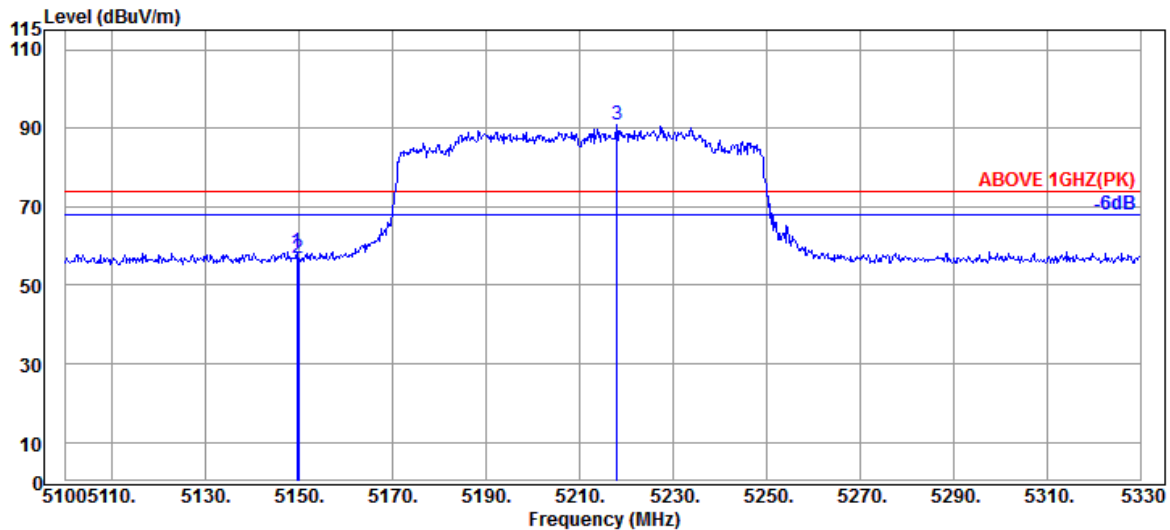

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.20	8.92	34.35	49.84	58.61	74.00	15.39	Peak
5149.910	34.20	8.92	34.35	47.94	56.71	74.00	17.29	Peak
@ 5217.990	34.30	8.98	34.33	82.07	91.02	---	---	Peak

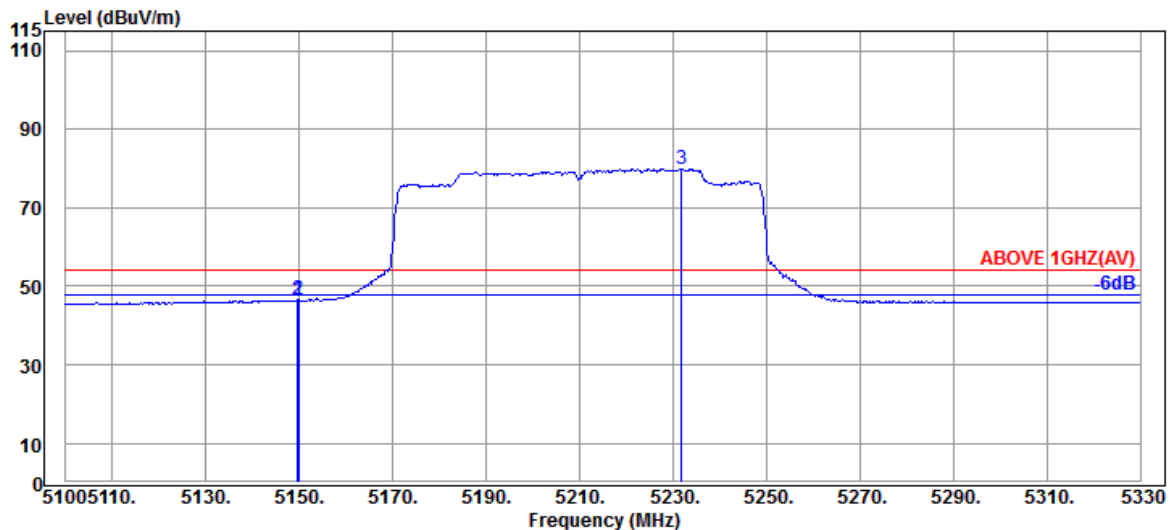


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	34.35	37.91	46.68	54.00	7.32	Average
5149.910	34.20	8.92	34.35	37.73	46.50	54.00	7.50	Average
@ 5231.790	34.35	8.99	34.32	70.91	79.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

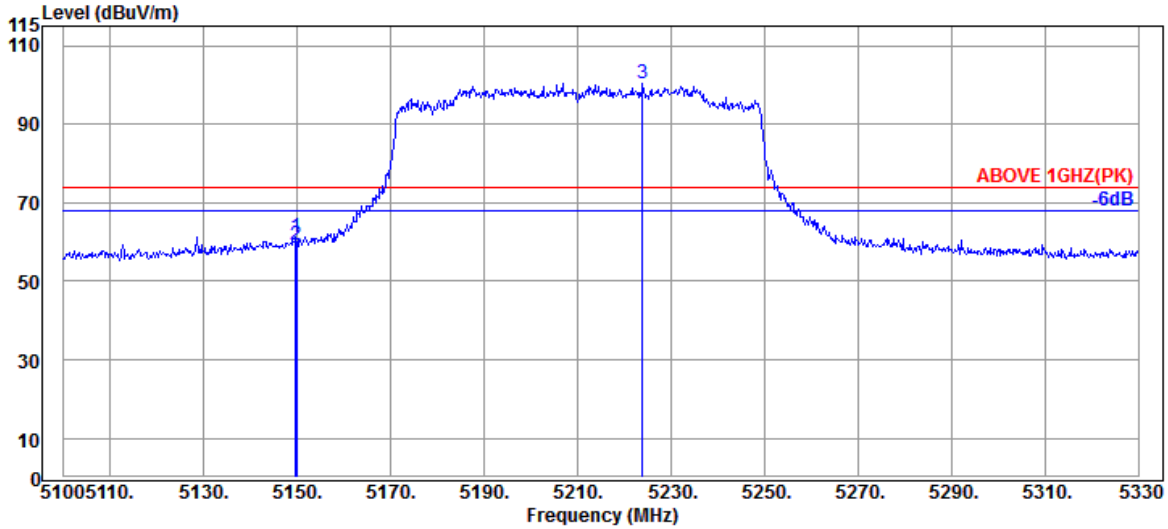

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	34.35	52.61	61.38	74.00	12.62	Peak
5149.910	34.20	8.92	34.35	50.70	59.47	74.00	14.53	Peak
@ 5223.970	34.30	8.98	34.32	91.59	100.55	---	---	Peak

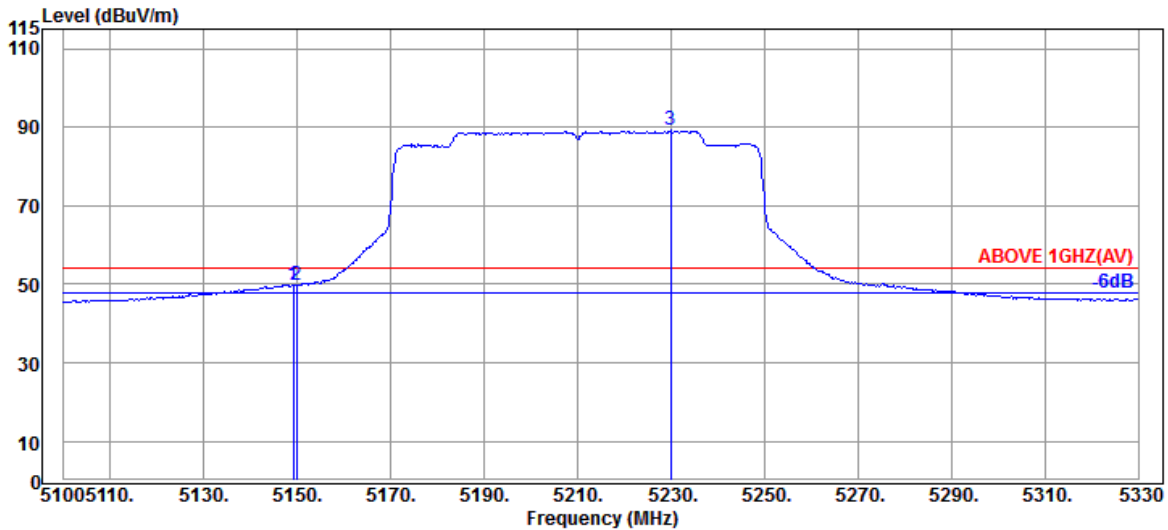


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.20	8.92	34.35	41.21	49.98	54.00	4.02	Average
5149.910	34.20	8.92	34.35	41.00	49.77	54.00	4.23	Average
@ 5229.950	34.30	8.99	34.32	80.17	89.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

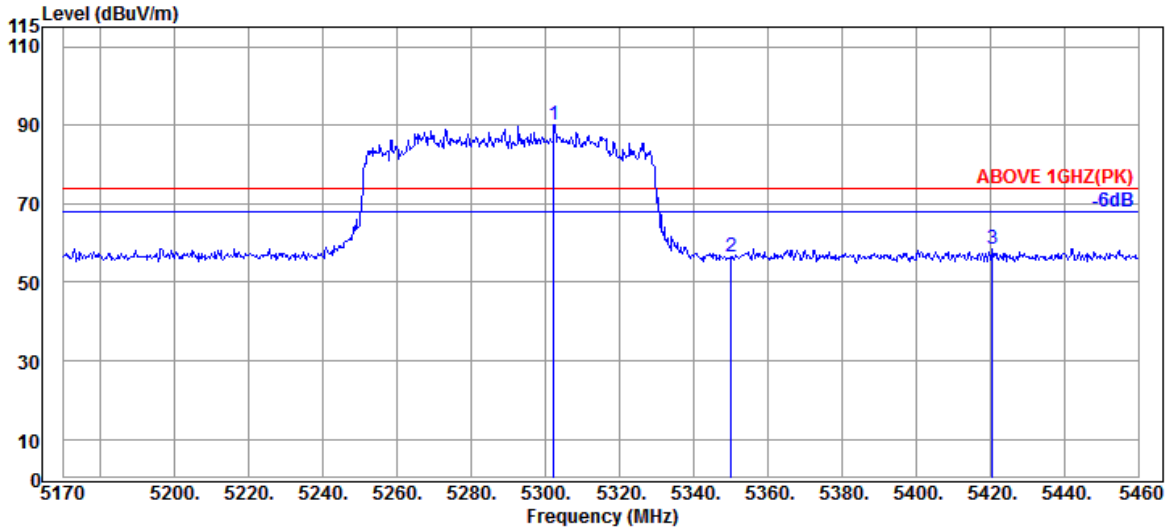

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.50	9.05	34.29	80.84	90.10	---	---	Peak
5350.090	34.60	9.10	34.27	47.01	56.44	74.00	17.56	Peak
5420.560	34.60	9.15	34.26	49.00	58.49	74.00	15.51	Peak

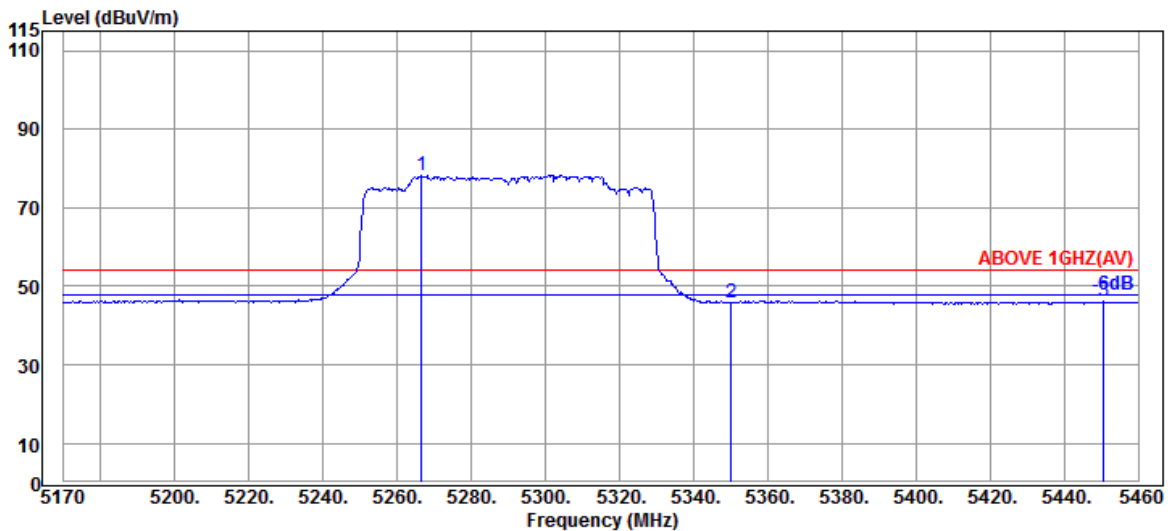


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.570	34.43	9.02	34.31	69.08	78.22	---	---	Average
5350.090	34.60	9.10	34.27	36.48	45.91	54.00	8.09	Average
5450.720	34.50	9.18	34.24	36.84	46.28	54.00	7.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

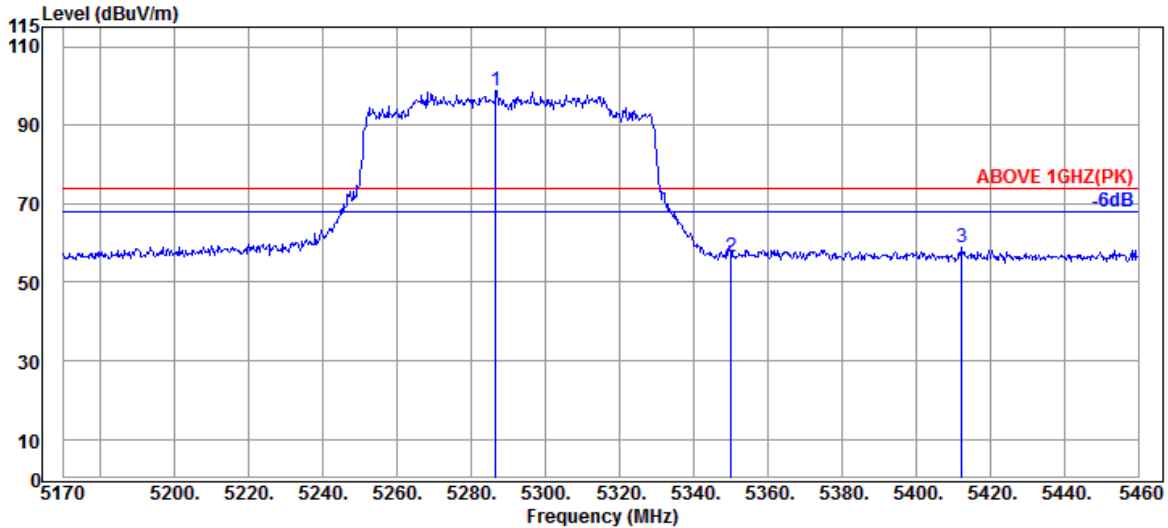

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	34.47	9.04	34.30	89.67	98.88	---	---	Peak
5350.090	34.60	9.10	34.27	47.11	56.54	74.00	17.46	Peak
5412.440	34.65	9.15	34.26	49.19	58.73	74.00	15.27	Peak

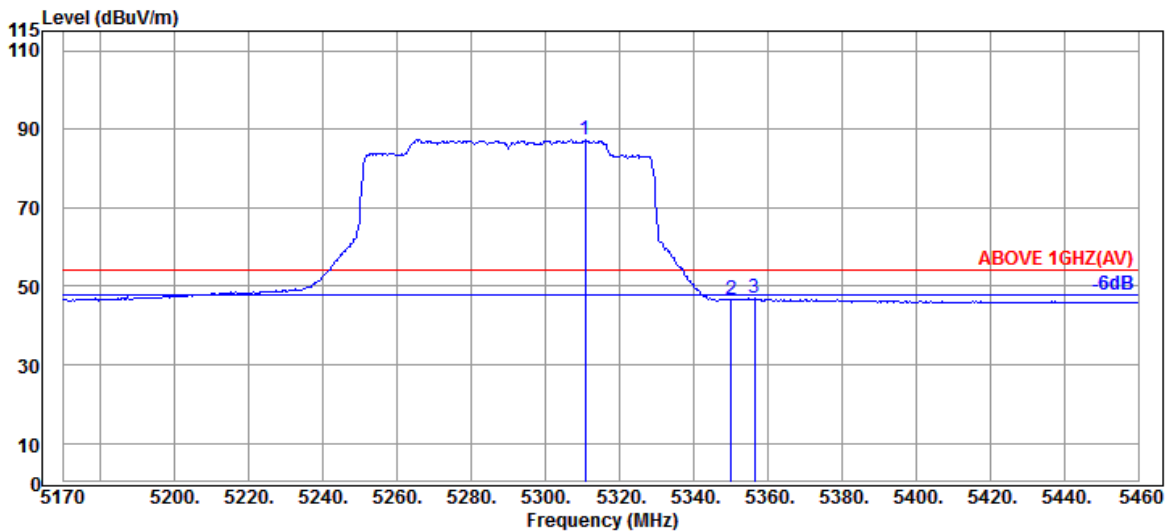


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.650	34.53	9.07	34.29	77.99	87.30	---	---	Average
5350.090	34.60	9.10	34.27	37.36	46.79	54.00	7.21	Average
5356.470	34.63	9.10	34.27	37.49	46.95	54.00	7.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

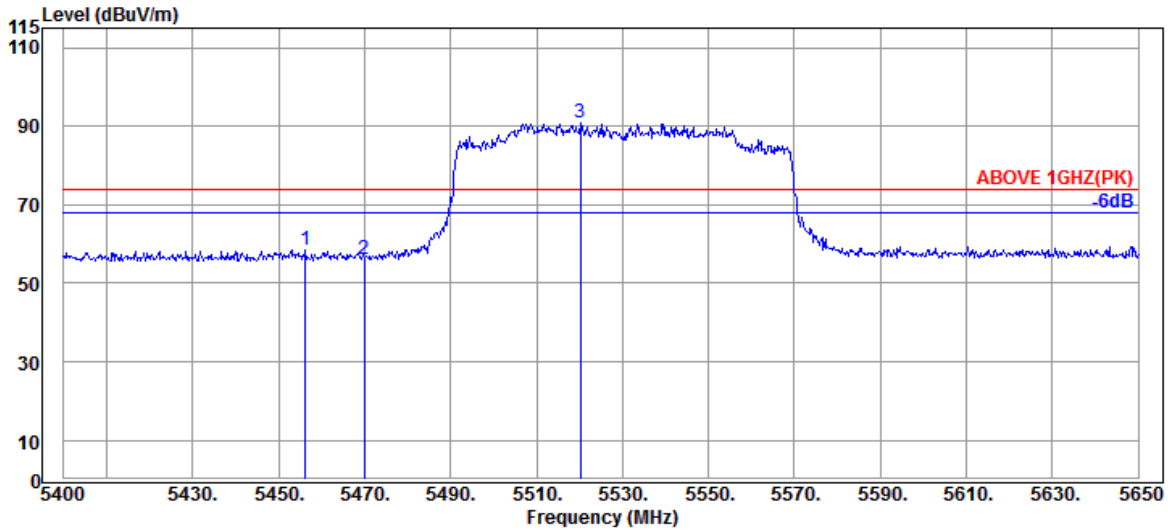

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.250	34.50	9.18	34.24	49.13	58.57	74.00	15.43	Peak
5470.000	34.47	9.20	34.24	46.86	56.29	74.00	17.71	Peak
@ 5520.250	34.37	9.24	34.24	81.35	90.72	---	---	Peak

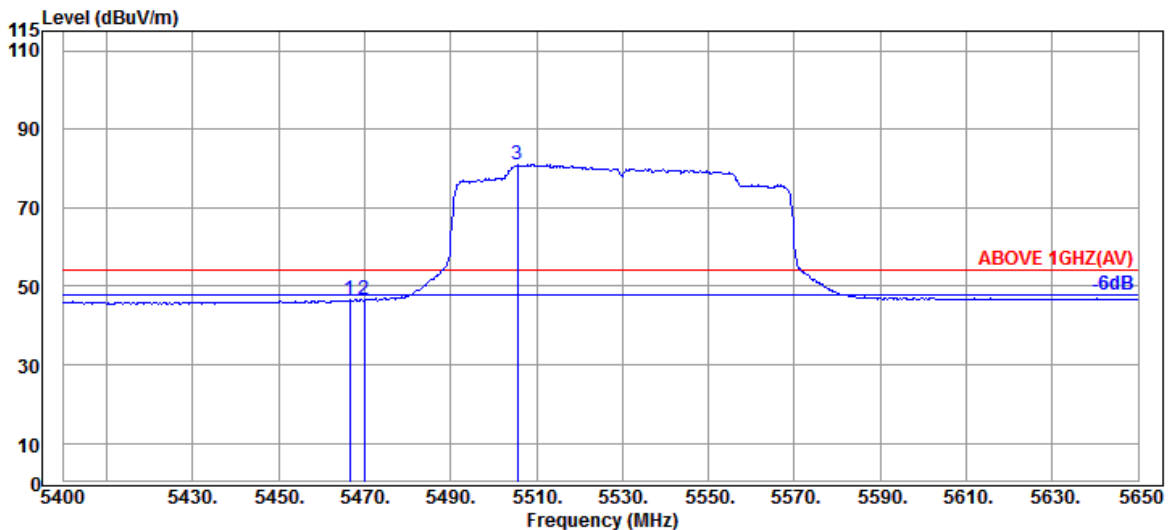


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.47	9.20	34.24	37.08	46.51	54.00	7.49	Average
5470.000	34.47	9.20	34.24	37.12	46.55	54.00	7.45	Average
@ 5505.500	34.40	9.23	34.24	71.58	80.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

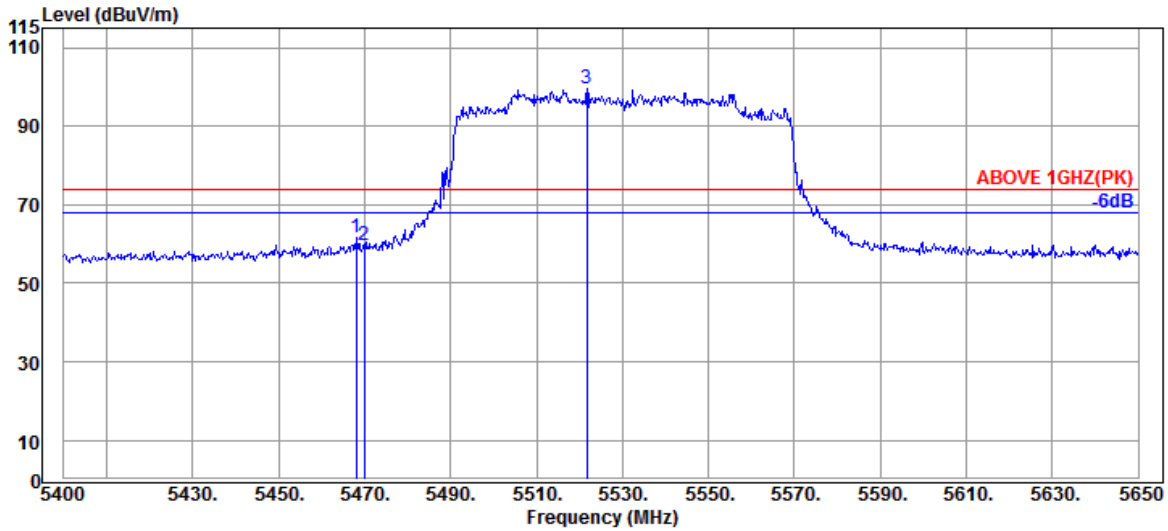

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.47	9.20	34.24	52.08	61.51	74.00	12.49	Peak
5470.000	34.47	9.20	34.24	50.13	59.56	74.00	14.44	Peak
@ 5521.750	34.37	9.24	34.24	90.27	99.64	---	---	Peak

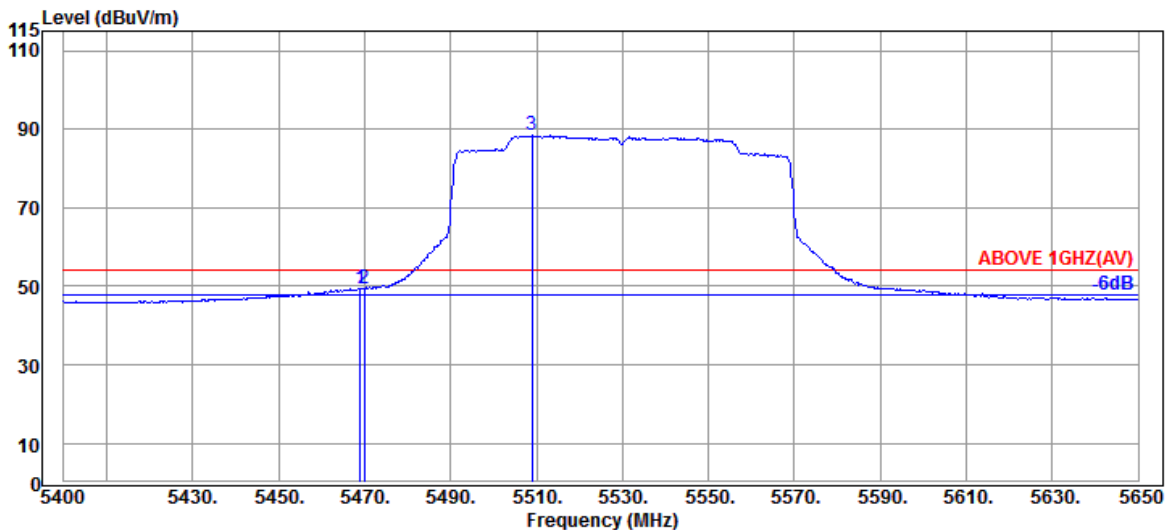


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	9.20	34.24	39.86	49.29	54.00	4.71	Average
5470.000	34.47	9.20	34.24	40.08	49.51	54.00	4.49	Average
@ 5509.000	34.40	9.23	34.24	79.00	88.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

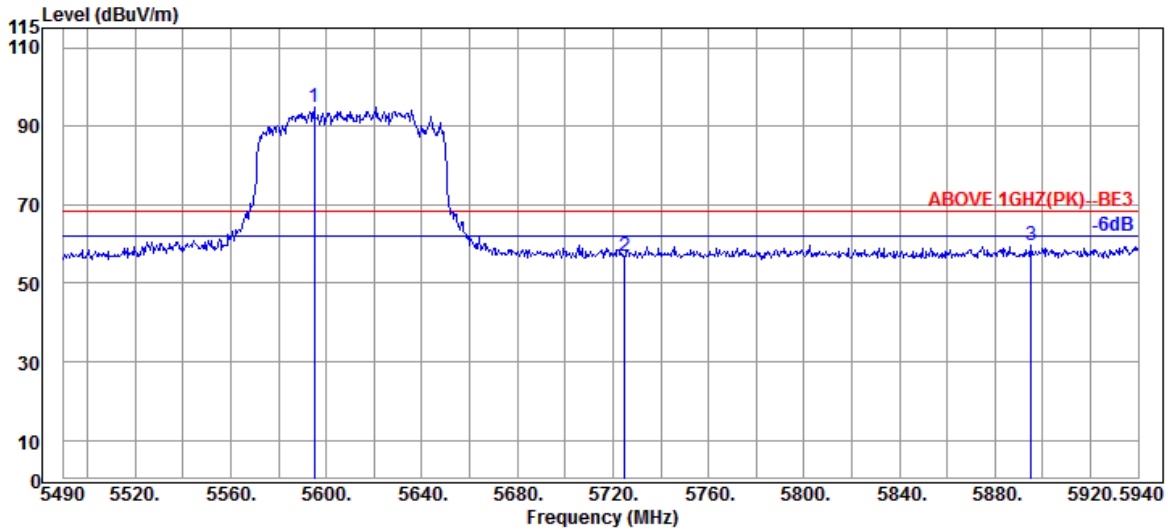

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5594.850	34.40	9.30	34.27	85.47	94.90	---	---	Peak
5724.900	34.67	9.42	34.32	47.25	57.02	68.20	11.18	Peak
5895.000	35.40	9.56	34.40	49.15	59.71	68.20	8.49	Peak

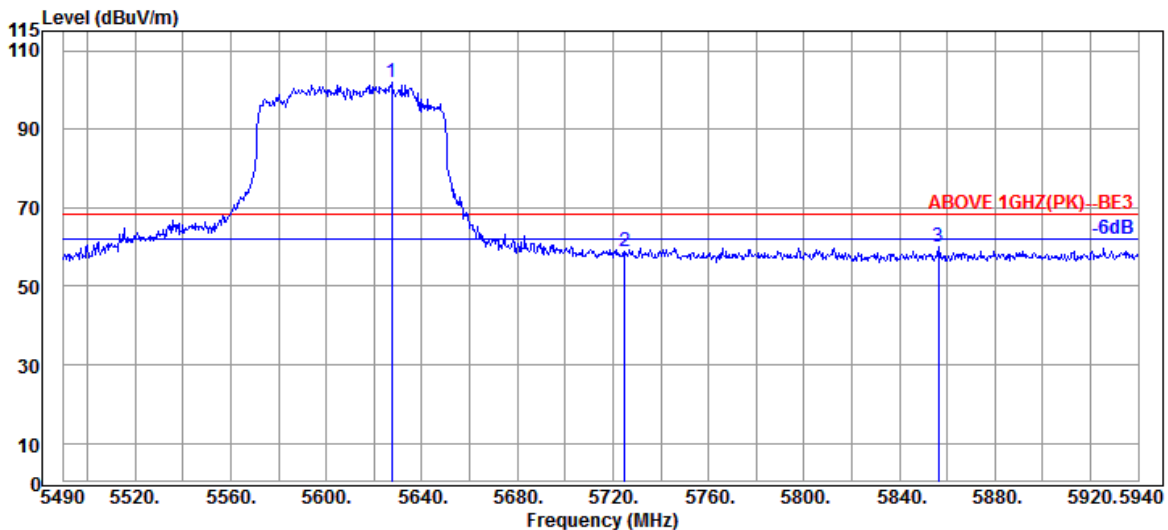

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5627.250	34.40	9.33	34.28	92.35	101.80	---	---	Peak
5724.900	34.67	9.42	34.32	48.97	58.74	68.20	9.46	Peak
5856.300	35.20	9.53	34.38	49.80	60.15	68.20	8.05	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.98	34.71	29.02	47.04	54.00	6.96	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.98	34.71	29.20	47.22	54.00	6.78	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5300MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	15.05	34.67	29.17	47.45	54.00	6.55	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	15.05	34.67	28.91	47.19	54.00	6.81	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.40	15.67	34.58	28.98	48.47	54.00	5.53	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.40	15.67	34.58	29.42	48.91	54.00	5.09	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	29.12	48.60	54.00	5.40	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	28.80	48.28	54.00	5.72	Peak

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.74	34.59	29.86	49.41	54.00	4.59	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.74	34.59	28.63	48.18	54.00	5.82	Peak

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.60	14.95	34.83	29.11	46.83	54.00	7.17	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.60	14.95	34.83	29.64	47.36	54.00	6.64	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	15.02	34.69	29.15	47.28	54.00	6.72	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	15.02	34.69	28.26	46.39	54.00	7.61	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	13.80	34.57	32.00	49.36	54.00	4.64	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	13.80	34.57	31.09	48.45	54.00	5.55	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	28.72	48.20	54.00	5.80	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	29.66	49.14	54.00	4.86	Peak

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.89	34.62	30.12	49.89	54.00	4.11	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.89	34.62	29.78	49.55	54.00	4.45	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.98	34.74	29.21	47.15	54.00	6.85	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.98	34.74	28.86	46.80	54.00	7.20	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	15.02	34.68	29.57	47.74	54.00	6.26	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	15.02	34.68	29.41	47.58	54.00	6.42	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.60	34.58	29.36	48.65	54.00	5.35	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.60	34.58	28.49	47.78	54.00	6.22	Peak



Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.67	34.59	28.89	48.37	54.00	5.63	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.67	34.59	29.13	48.61	54.00	5.39	Peak

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.40	15.74	34.59	29.78	49.33	54.00	4.67	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.40	15.74	34.59	28.69	48.24	54.00	5.76	Peak

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.98	34.78	30.64	48.49	54.00	5.51	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.98	34.78	29.35	47.20	54.00	6.80	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.05	34.67	28.54	46.79	54.00	7.21	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.05	34.67	29.48	47.73	54.00	6.27	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.45	34.57	29.07	48.15	54.00	5.85	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.45	34.57	27.87	46.95	54.00	7.05	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.60	34.58	28.55	47.90	54.00	6.10	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.60	34.58	28.76	48.11	54.00	5.89	Peak

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.82	34.60	30.04	49.69	54.00	4.31	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.82	34.60	30.39	50.04	54.00	3.96	Peak

Mode	802.11ac-VHT160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	15.02	34.69	28.80	46.93	54.00	7.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	15.02	34.69	29.30	47.43	54.00	6.57	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.38	34.57	28.63	47.51	54.00	6.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.38	34.57	29.11	47.99	54.00	6.01	Peak

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.95	34.78	29.75	47.52	54.00	6.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.95	34.78	30.29	48.06	54.00	5.94	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	15.02	34.69	28.83	46.96	54.00	7.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	15.02	34.69	28.79	46.92	54.00	7.08	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.40	15.67	34.58	29.71	49.20	54.00	4.80	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.40	15.67	34.58	28.31	47.80	54.00	6.20	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	28.51	47.99	54.00	6.01	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.67	34.59	30.22	49.70	54.00	4.30	Peak

Mode	802.11ax-HE20	U-NII Band	III
		Frequency	TX 5825MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.89	34.62	29.38	49.15	54.00	4.85	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.89	34.62	29.24	49.01	54.00	4.99	Peak

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.98	34.74	28.50	46.44	54.00	7.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.98	34.74	29.68	47.62	54.00	6.38	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	15.02	34.68	28.38	46.55	54.00	7.45	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	15.02	34.68	29.37	47.54	54.00	6.46	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.60	34.58	28.57	47.86	54.00	6.14	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.60	34.58	28.85	48.14	54.00	5.86	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.67	34.59	29.62	49.10	54.00	4.90	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.67	34.59	29.68	49.16	54.00	4.84	Peak

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.82	34.61	30.36	50.07	54.00	3.93	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.82	34.61	29.82	49.53	54.00	4.47	Peak



Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.98	34.78	29.28	47.13	54.00	6.87	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.98	34.78	29.47	47.32	54.00	6.68	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.05	34.67	29.12	47.37	54.00	6.63	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.05	34.67	29.79	48.04	54.00	5.96	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.45	34.57	29.37	48.45	54.00	5.55	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.45	34.57	29.23	48.31	54.00	5.69	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.60	34.58	28.49	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.60	34.58	28.62	47.97	54.00	6.03	Peak

Mode	802.11ax-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.82	34.60	30.52	50.17	54.00	3.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.82	34.60	29.70	49.35	54.00	4.65	Peak

Mode	802.11ax-HE160	U-NII Band	I/2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	15.02	34.69	28.68	46.81	54.00	7.19	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	15.02	34.69	29.35	47.48	54.00	6.52	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.38	34.57	29.40	48.28	54.00	5.72	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.38	34.57	28.62	47.50	54.00	6.50	Peak

**A.2.3 Emissions in Non-restricted Frequency Bands**

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

### A.3 EMISSION/OCCUPIED BANDWIDTH

Test Date	2021/12/27 ~ 30, 2022/02/21	Temp./Hum.	14 ~ 16°C/61 ~ 74%
Cable Loss	1.0dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

#### A.3.1 Emission/Occupied Bandwidth Result

Mode	U-NII Band	Centre Frequency (MHz)	Emission (26dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	I	5180	24.40	17.067	Reference only
		5200	22.66	16.775	
		5240	23.98	16.772	
	2A	5260	23.35	16.828	
		5300	22.60	16.763	
		5320	23.22	16.780	
	2C	5500	24.46	16.734	
		5580	24.14	16.787	
		5700	23.53	16.787	
		5720	23.66	16.920	
802.11n-HT20	I	5180	23.44	17.813	Reference only
		5200	23.27	17.856	
		5240	23.69	17.865	
	2A	5260	22.86	17.823	
		5300	23.98	17.845	
		5320	22.95	17.823	
	2C	5500	22.92	17.814	
		5580	23.47	17.859	
		5700	23.38	17.866	
		5720	22.47	17.842	

Mode	U-NII Band	Centre Frequency (MHz)	Emission (26dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n-HT40	I	5190	41.68	36.155	Reference only
		5230	42.05	36.148	
	2A	5270	42.19	36.163	
		5310	41.73	36.146	
	2C	5510	42.44	36.134	
		5550	41.67	36.203	
		5670	41.90	36.188	
802.11ac-VHT80	I	5210	82.04	75.058	Reference only
	2A	5290	80.66	75.078	
	2C	5530	80.10	75.041	
		5610	85.03	75.143	
		5690	87.30	75.308	
802.11ac-VHT160	I	5250	162.00	153.24	Reference only
	2A				
	2C	5570	161.50	153.31	

Mode	U-NII Band	Centre Frequency (MHz)	Emission (26dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	23.39	18.922	Reference only
		5200	22.94	18.968	
		5240	23.21	18.974	
	2A	5260	23.11	18.934	
		5300	23.00	18.959	
		5320	23.02	18.997	
	2C	5500	23.34	18.992	
		5580	23.85	19.004	
		5700	22.98	19.018	
		5720	23.35	18.943	
802.11ax-HE40	I	5190	42.15	37.624	Reference only
		5230	42.24	37.633	
	2A	5270	43.81	37.657	
		5310	42.50	37.610	
	2C	5510	42.42	37.610	
		5550	42.22	37.588	
		5670	42.59	37.630	
		5710	42.79	36.611	
802.11ax-HE80	I	5210	82.45	76.857	Reference only
	2A	5290	81.64	76.543	
	2C	5530	80.16	76.626	
		5610	82.60	76.584	
		5690	85.34	76.883	
802.11ax-HE160	I	5250	162.20	154.80	Reference only
	2A				
	2C	5570	162.00	155.34	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Emission (26dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	26/0	20.62	18.500	Reference only
			52/37	21.36	18.336	
			106/53	22.08	18.191	
	2A	5320	26/8	20.21	18.534	
			52/40	22.21	18.325	
			106/54	23.67	18.158	
	2C	5500	26/0	20.56	18.598	
			52/37	21.31	18.409	
			106/53	22.70	18.219	
5700		26/8	20.66	18.265		
		52/40	21.62	18.143		
		106/54	23.06	18.085		
802.11ax-HE40	I	5190	242/61	24.38	18.792	Reference only
	2A	5310	242/62	23.45	18.755	
	2C	5510	242/61	23.42	18.817	
		5670	242/62	23.45	18.791	
802.11ax-HE80	I	5210	484/65	40.88	37.224	Reference only
	2A	5290	484/66	41.86	37.306	
	2C	5530	484/65	42.05	37.242	
		5610	484/66	43.20	37.323	
802.11ax-HE160	I/2A	5250	996/67	83.38	76.967	Reference only
			996/S67	83.82	76.952	
	2C	5570	996/67	84.64	77.139	
			996/S67	84.12	76.799	

Mode	U-NII Band	Centre Frequency (MHz)	Emission (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	III	5745	13.87	16.849	≥ 500kHz
		5785	15.05	16.788	
		5825	15.64	16.855	
802.11n-HT20	III	5745	16.91	17.803	
		5785	16.31	17.819	
		5825	16.54	17.862	
802.11n-HT40	III	5755	36.25	36.243	
		5795	36.32	36.207	
802.11ac-VHT80	III	5775	75.10	75.523	
802.11ax-HE20	III	5745	17.96	18.947	
		5785	18.11	18.919	
		5825	14.25	18.901	
802.11ax-HE40	III	5755	36.41	37.762	
		5795	36.42	37.587	
802.11ax-HE80	III	5775	72.66	76.767	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Emission (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	III	5745	26/0	16.98	18.772	≥ 500kHz
			52/37	17.02	18.124	
			106/53	17.74	17.840	
	III	5825	26/8	15.82	18.551	
			52/40	16.99	18.345	
			106/54	16.16	18.283	
802.11ax-HE40	III	5755	242/61	18.45	18.995	
	III	5795	242/62	17.04	18.988	
802.11ax-HE80	III	5775	484/65	35.83	37.719	
			484/66	35.42	37.708	