

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	353
A.2.3 Emissions in Non-restricted Frequency Bands.....	390
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	391
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	391
A.3.2 Measurement Plots	401
A.4 POWER SPECTRAL DENSITY	442
A.4.1 Power Spectral Density Result	442
A.4.2 Measurement Plots	451
A.5 FREQUENCY STABILITY	493
A.5.1 Frequency stability Result	493

A.1 CONDUCTED EMISSION

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with PM main board)		

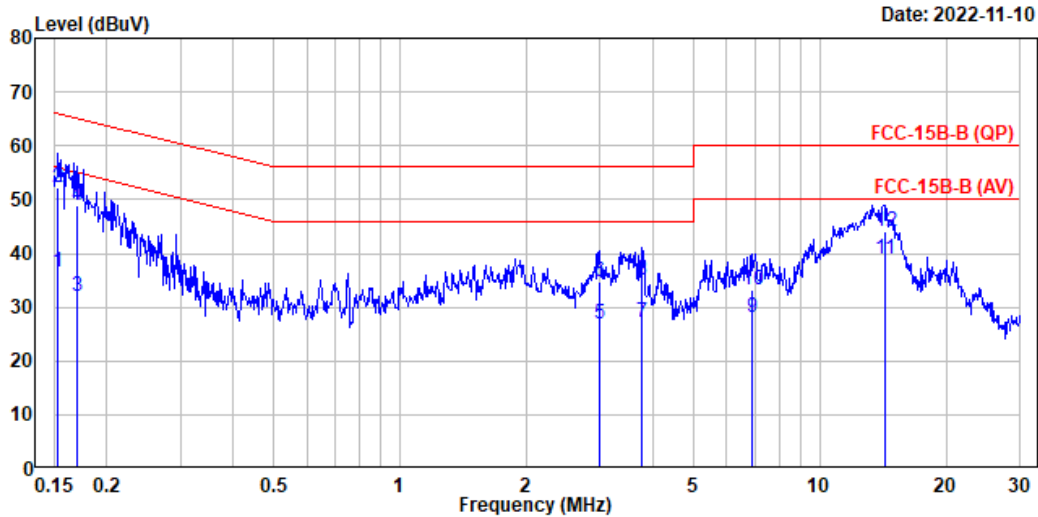

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.22	0.03	9.85	16.41	36.51	55.83	19.32	Average
2	0.153	10.22	0.03	9.85	32.14	52.24	65.83	13.59	QP
3	0.171	10.22	0.03	9.85	11.75	31.85	54.92	23.07	Average
4	0.171	10.22	0.03	9.85	28.79	48.89	64.92	16.03	QP
5	3.000	10.27	0.07	9.86	6.77	26.97	46.00	19.03	Average
6	3.000	10.27	0.07	9.86	14.44	34.64	56.00	21.36	QP
7	3.754	10.28	0.08	9.86	6.80	27.02	46.00	18.98	Average
8	3.754	10.28	0.08	9.86	14.88	35.10	56.00	20.90	QP
9	6.895	10.36	0.11	9.87	7.68	28.02	50.00	21.98	Average
10	6.895	10.36	0.11	9.87	12.95	33.29	60.00	26.71	QP
11	14.275	10.53	0.17	9.91	18.26	38.87	50.00	11.13	Average
12	14.275	10.53	0.17	9.91	23.57	44.18	60.00	15.82	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with PM main board)		

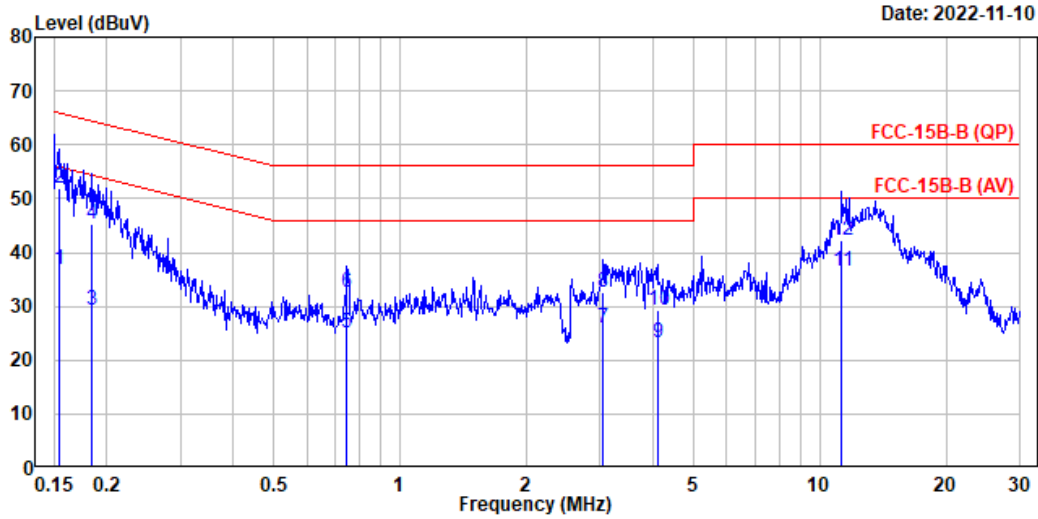

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.154	10.34	0.03	9.85	16.58	36.80	55.79	18.99	Average
2	0.154	10.34	0.03	9.85	31.64	51.86	65.79	13.93	QP
3	0.185	10.33	0.03	9.85	9.17	29.38	54.26	24.88	Average
4	0.185	10.33	0.03	9.85	25.06	45.27	64.26	18.99	QP
5	0.747	10.33	0.04	9.85	4.82	25.04	46.00	20.96	Average
6	0.747	10.33	0.04	9.85	12.33	32.55	56.00	23.45	QP
7	3.045	10.38	0.07	9.86	5.57	25.88	46.00	20.12	Average
8	3.045	10.38	0.07	9.86	12.29	32.60	56.00	23.40	QP
9	4.106	10.41	0.08	9.86	2.76	23.11	46.00	22.89	Average
10	4.106	10.41	0.08	9.86	8.85	29.20	56.00	26.80	QP
11	11.294	10.70	0.15	9.90	15.75	36.50	50.00	13.50	Average
12	11.294	10.70	0.15	9.90	21.41	42.16	60.00	17.84	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with GM main board)		

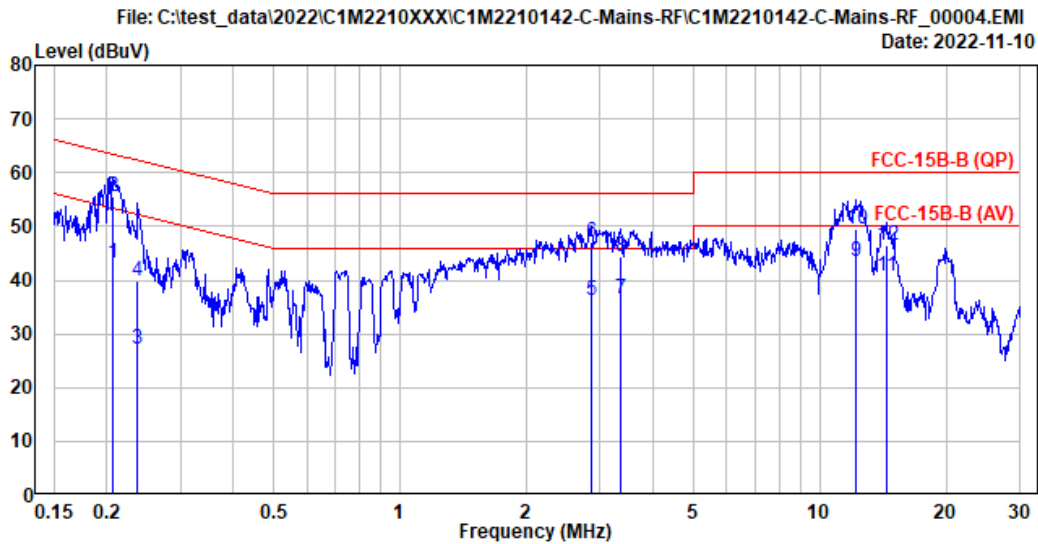

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.206	10.32	0.03	9.85	22.96	43.16	53.35	10.19	Average
2	0.206	10.32	0.03	9.85	35.36	55.56	63.35	7.79	QP
3	0.237	10.32	0.03	9.85	7.03	27.23	52.19	24.96	Average
4	0.237	10.32	0.03	9.85	19.57	39.77	62.19	22.42	QP
5	2.854	10.38	0.07	9.86	16.02	36.33	46.00	9.67	Average
6	2.854	10.38	0.07	9.86	26.87	47.18	56.00	8.82	QP
7	3.347	10.39	0.07	9.86	16.28	36.60	46.00	9.40	Average
8	3.347	10.39	0.07	9.86	23.92	44.24	56.00	11.76	QP
9	12.232	10.75	0.15	9.90	22.64	43.44	50.00	6.56	Average
10	12.232	10.75	0.15	9.90	28.65	49.45	60.00	10.55	QP
11	14.418	10.85	0.17	9.91	19.92	40.85	50.00	9.15	Average
12	14.418	10.85	0.17	9.91	25.57	46.50	60.00	13.50	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with GM main board)		

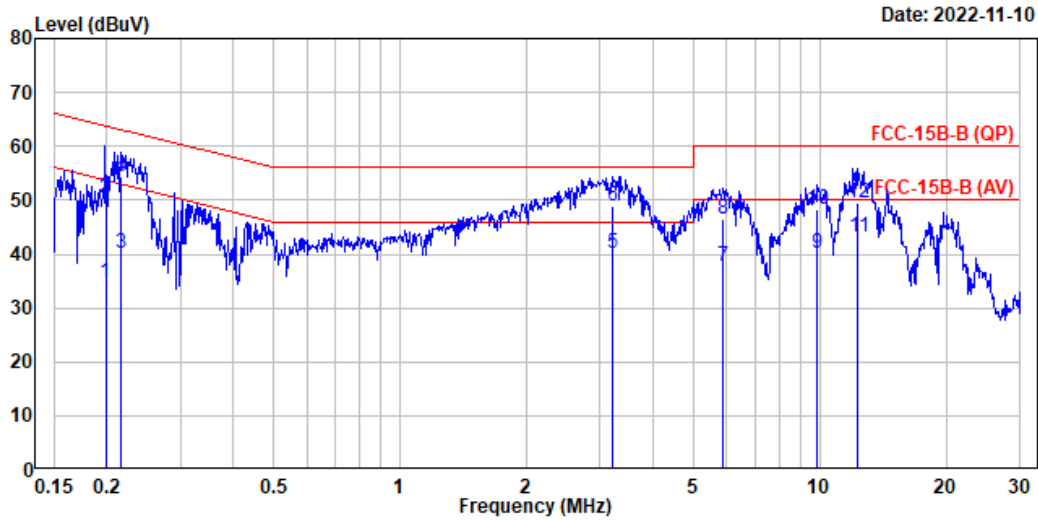

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.199	10.22	0.03	9.85	14.76	34.86	53.66	18.80	Average
2	0.199	10.22	0.03	9.85	30.19	50.29	63.66	13.37	QP
3	0.216	10.22	0.03	9.85	20.05	40.15	52.98	12.83	Average
4	0.216	10.22	0.03	9.85	34.34	54.44	62.98	8.54	QP
5	3.216	10.27	0.07	9.86	19.92	40.12	46.00	5.88	Average
6	3.216	10.27	0.07	9.86	28.57	48.77	56.00	7.23	QP
7	5.879	10.34	0.10	9.87	17.47	37.78	50.00	12.22	Average
8	5.879	10.34	0.10	9.87	26.22	46.53	60.00	13.47	QP
9	9.872	10.42	0.14	9.89	19.78	40.23	50.00	9.77	Average
10	9.872	10.42	0.14	9.89	27.94	48.39	60.00	11.61	QP
11	12.354	10.49	0.15	9.90	22.76	43.30	50.00	6.70	Average
12	12.354	10.49	0.15	9.90	28.83	49.37	60.00	10.63	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/10/20~12/11	Temp./Hum.	22~24°C/51~61%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

● **Test SKU #1 (with PM main board)**

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	31.61	29.80	40.00	10.20	Peak
150.280	16.86	3.21	26.00	33.90	27.97	43.50	15.53	Peak
378.230	21.18	5.69	26.28	38.28	38.87	46.00	7.13	Peak
485.900	23.24	6.65	27.04	36.52	39.37	46.00	6.63	Peak
540.220	23.86	6.90	27.24	31.37	34.89	46.00	11.11	Peak
979.630	26.89	9.18	26.72	29.23	38.58	54.00	15.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	21.20	1.57	0.00	14.30	37.07	40.00	2.93	QP
152.220	16.77	3.22	25.98	37.87	31.88	43.50	11.62	Peak
378.230	21.18	5.69	26.28	38.41	39.00	46.00	7.00	Peak
485.900	23.24	6.65	27.04	36.91	39.76	46.00	6.24	Peak
540.220	23.86	6.90	27.24	31.35	34.87	46.00	11.13	Peak
979.630	26.89	9.18	26.72	28.80	38.15	54.00	15.85	Peak

● **Test SKU #2 (with GM main board)**

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	31.84	29.54	40.00	10.46	Peak
101.780	16.95	2.63	26.28	33.33	26.63	43.50	16.87	Peak
378.230	21.18	5.69	26.28	38.22	38.81	46.00	7.19	Peak
485.900	23.24	6.65	27.04	36.28	39.13	46.00	6.87	Peak
540.220	23.86	6.90	27.24	30.88	34.40	46.00	11.60	Peak
996.120	27.07	9.27	26.66	28.69	38.37	54.00	15.63	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.87	1.46	0.00	13.80	38.13	40.00	1.87	QP
200.720	15.40	3.71	25.79	39.38	32.70	43.50	10.80	Peak
378.230	21.18	5.69	26.28	37.11	37.70	46.00	8.30	Peak
485.900	23.24	6.65	27.04	36.32	39.17	46.00	6.83	Peak
540.220	23.86	6.90	27.24	32.34	35.86	46.00	10.14	Peak
1000.000	27.11	9.29	26.66	28.40	38.14	54.00	15.86	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


- **Test SKU #1 (with INPAQ Antenna and PM main board)**

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

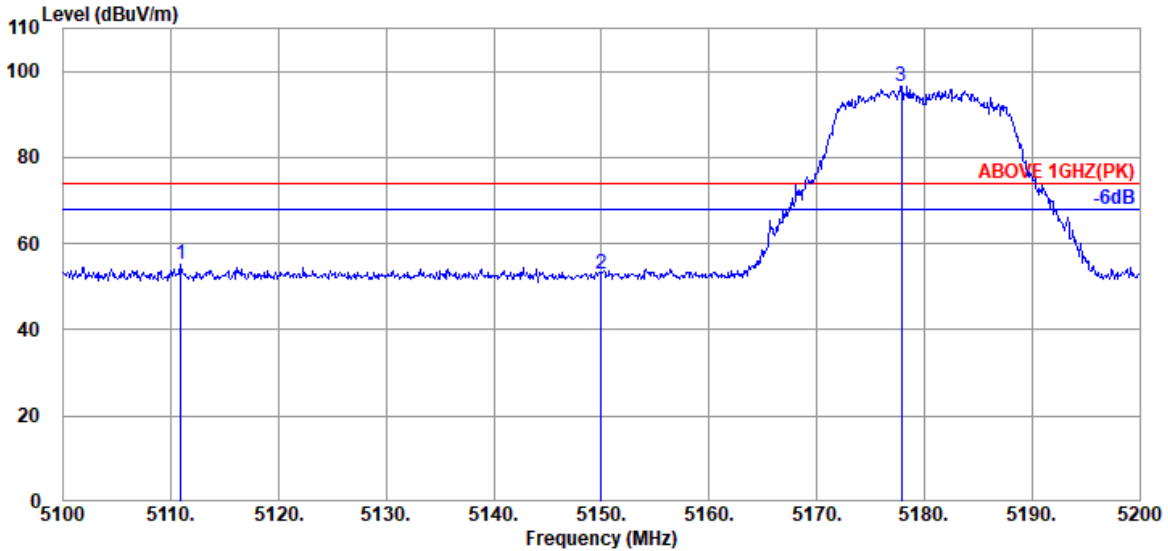

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.900	33.70	8.86	39.29	52.01	55.28	74.00	18.72	Peak
5150.000	33.70	8.88	39.29	49.60	52.89	74.00	21.11	Peak
@ 5177.900	33.70	8.90	39.28	93.21	96.53	---	---	Peak

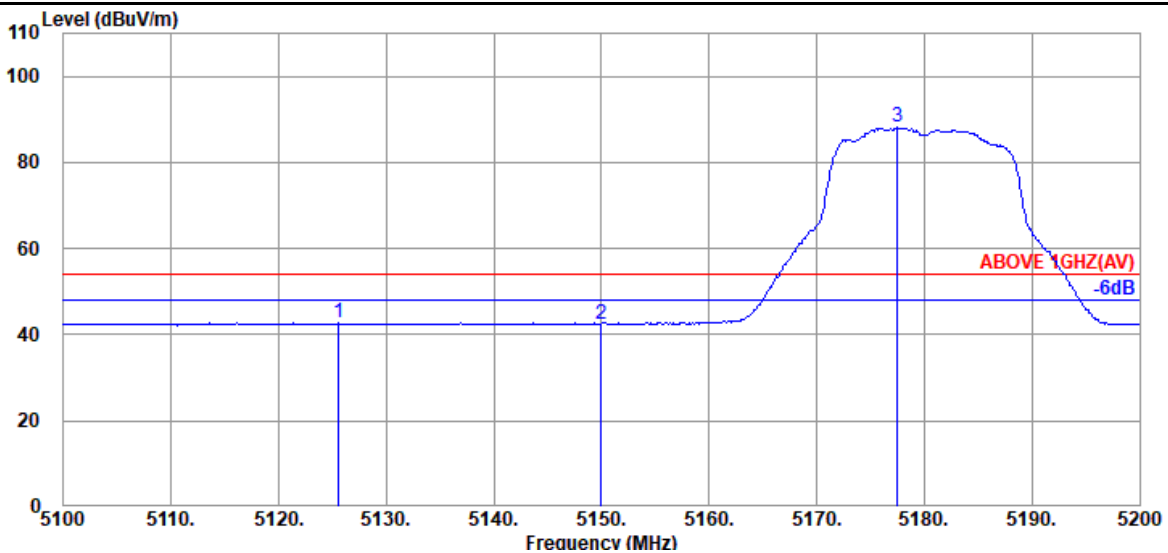


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.600	33.70	8.87	39.29	39.45	42.73	54.00	11.27	Average
5150.000	33.70	8.88	39.29	39.14	42.43	54.00	11.57	Average
@ 5177.500	33.70	8.90	39.28	84.78	88.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

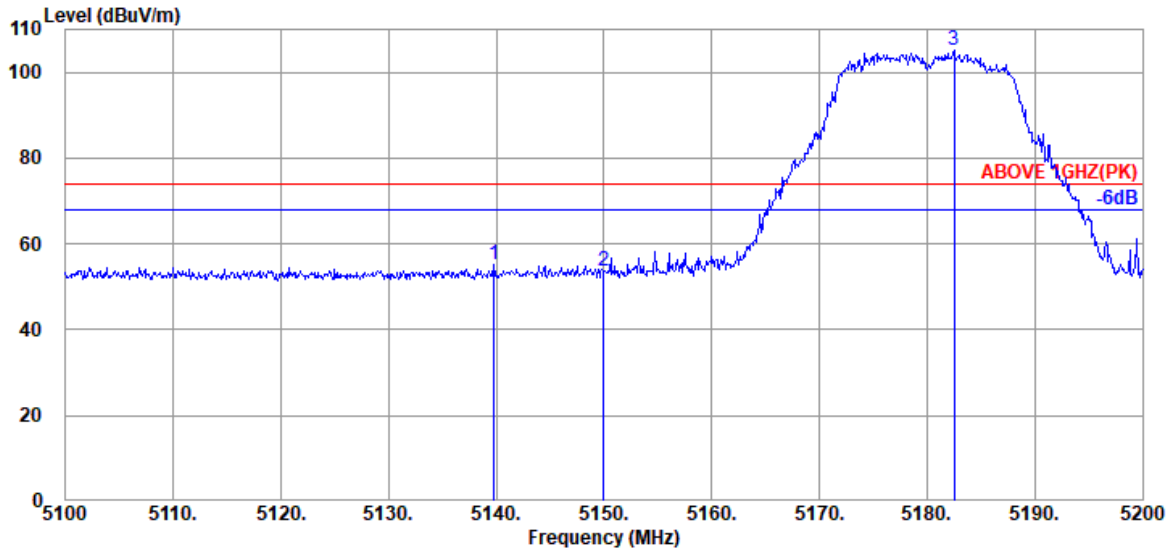

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.800	33.70	8.88	39.29	51.78	55.07	74.00	18.93	Peak
5150.000	33.70	8.88	39.29	50.21	53.50	74.00	20.50	Peak
@ 5182.500	33.70	8.90	39.28	101.63	104.95	---	---	Peak

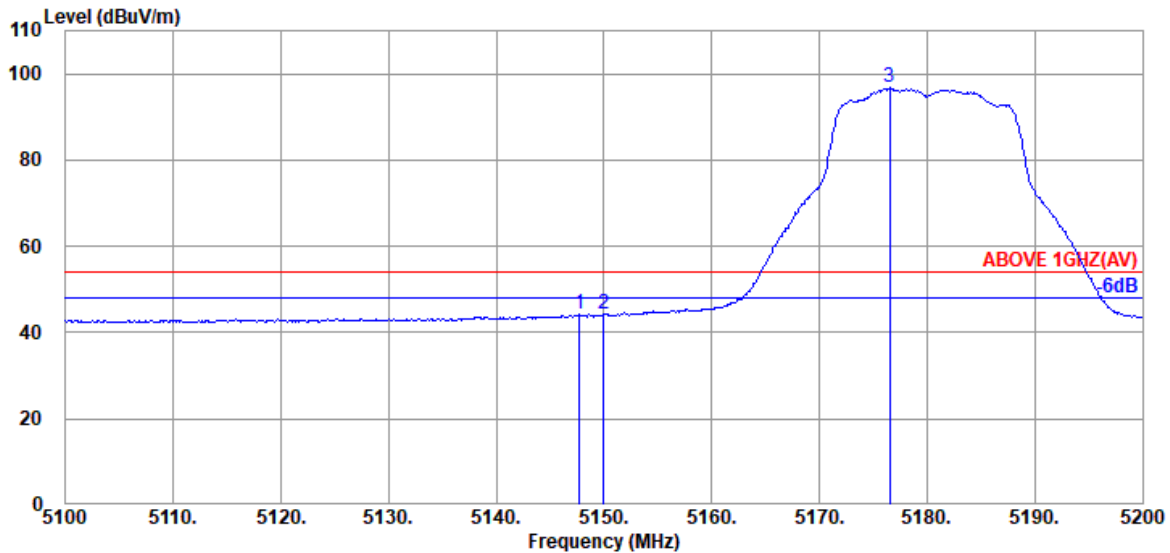

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.700	33.70	8.88	39.29	40.99	44.28	54.00	9.72	Average
5150.000	33.70	8.88	39.29	40.90	44.19	54.00	9.81	Average
@ 5176.500	33.70	8.90	39.28	93.40	96.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

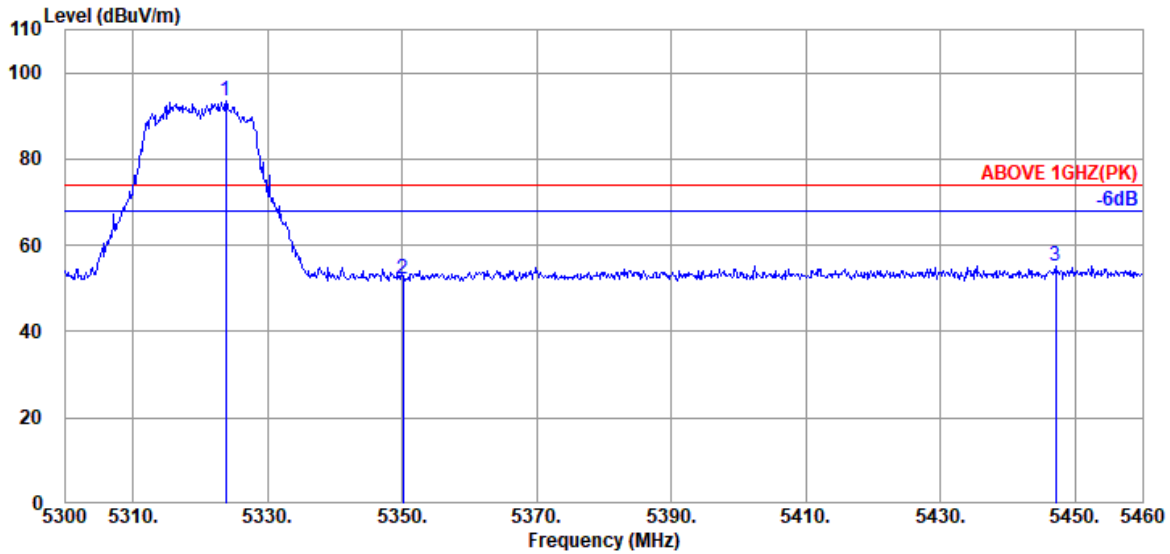

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	33.97	8.99	39.27	89.62	93.31	---	---	Peak
5350.080	33.90	8.99	39.27	48.59	52.21	74.00	21.79	Peak
5447.040	34.17	9.04	39.26	51.19	55.14	74.00	18.86	Peak

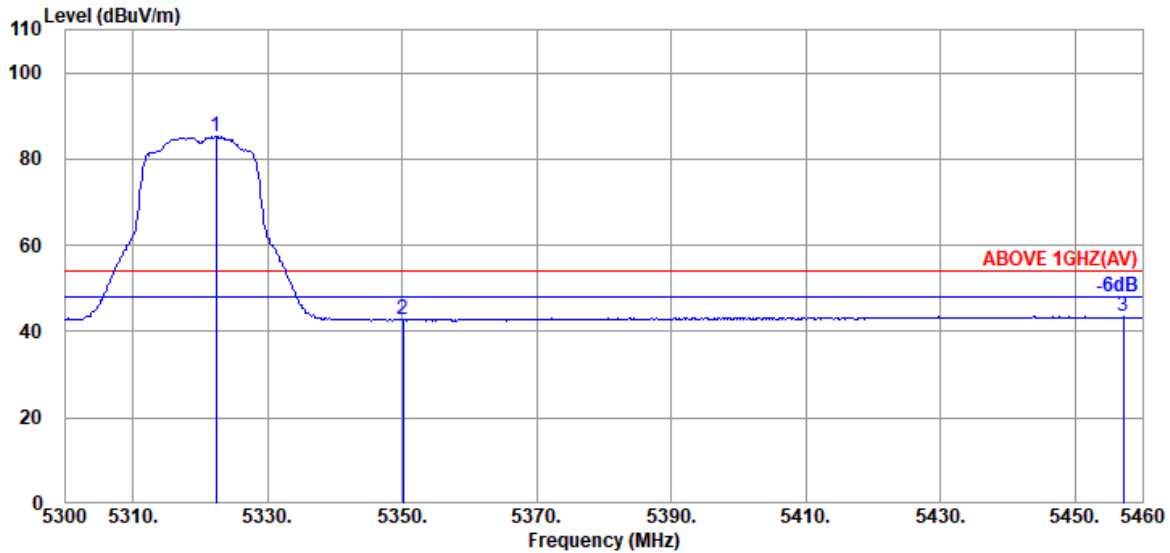


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.03	8.98	39.27	81.44	85.18	---	---	Average
5350.080	33.90	8.99	39.27	39.14	42.76	54.00	11.24	Average
5457.120	34.20	9.05	39.26	39.47	43.46	54.00	10.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

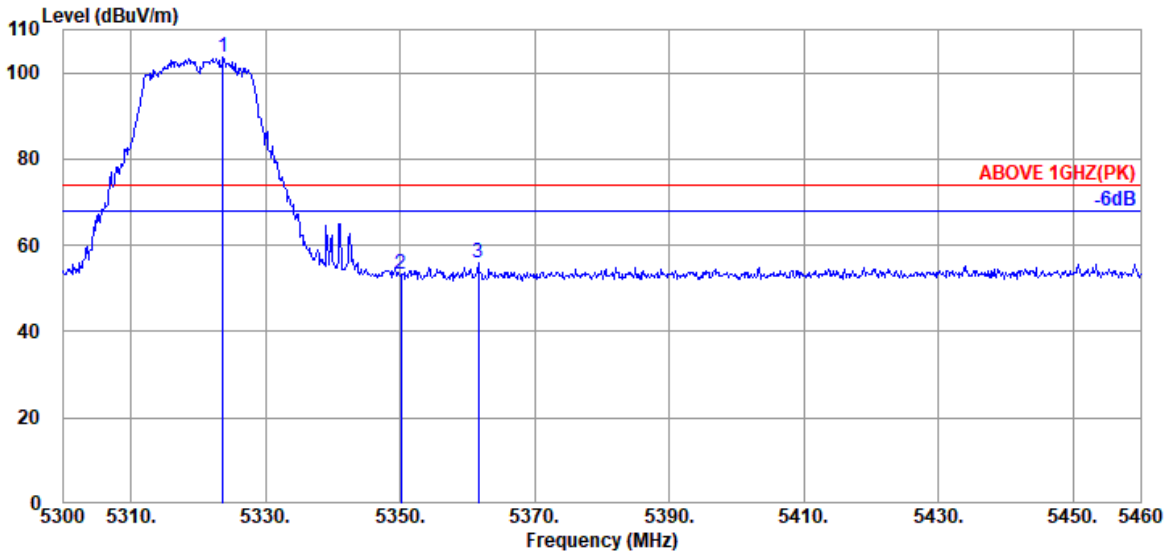

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	33.97	8.99	39.27	99.78	103.47	---	---	Peak
5350.080	33.90	8.99	39.27	49.73	53.35	74.00	20.65	Peak
5361.600	33.97	9.00	39.27	52.06	55.76	74.00	18.24	Peak

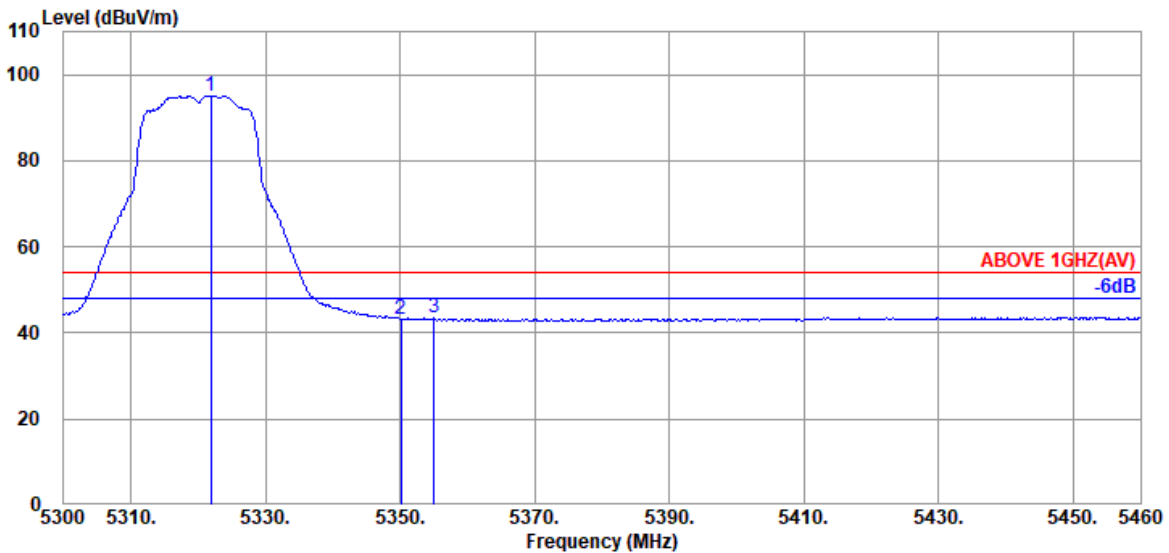


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	34.03	8.98	39.27	91.41	95.15	---	---	Average
5350.080	33.90	8.99	39.27	39.64	43.26	54.00	10.74	Average
5355.040	33.97	9.00	39.27	39.88	43.58	54.00	10.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

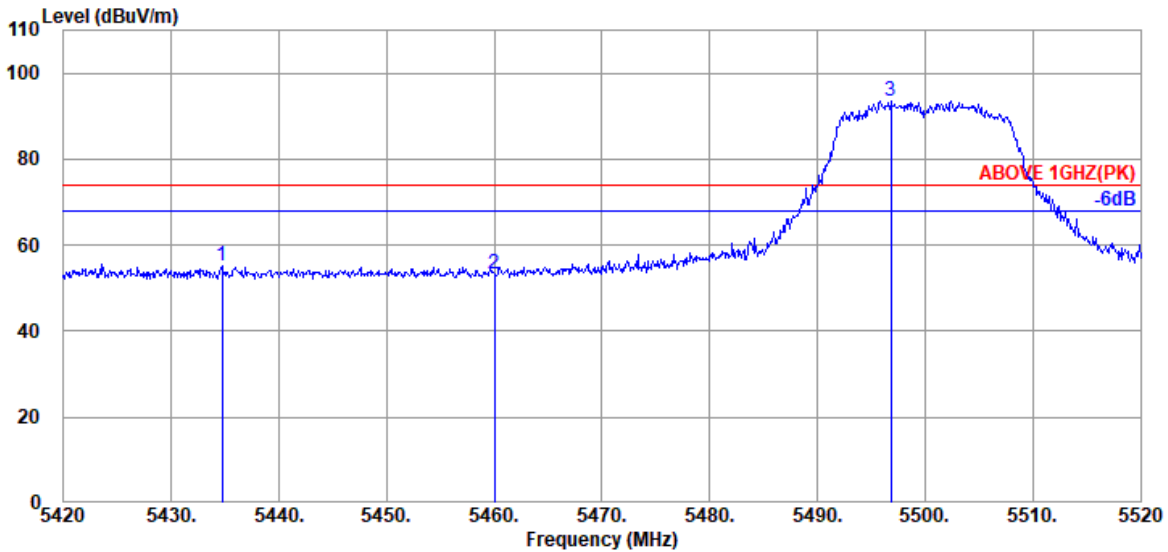

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.700	34.17	9.04	39.26	51.08	55.03	74.00	18.97	Peak
5460.000	34.20	9.05	39.26	49.33	53.32	74.00	20.68	Peak
@ 5496.800	34.10	9.08	39.26	89.71	93.63	---	---	Peak

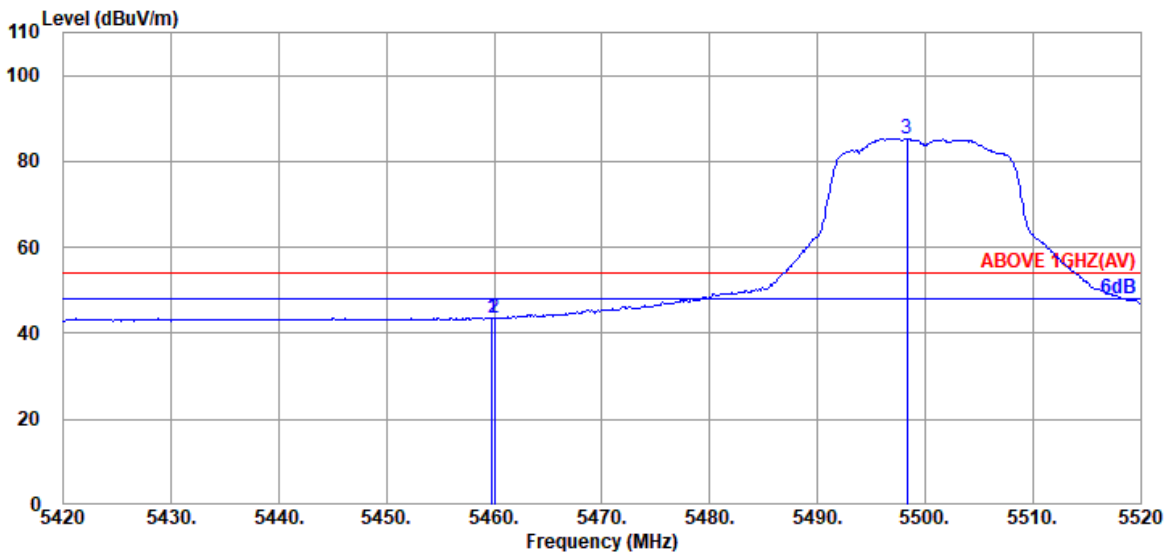


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.20	9.05	39.26	39.59	43.58	54.00	10.42	Average
5460.000	34.20	9.05	39.26	39.38	43.37	54.00	10.63	Average
@ 5498.300	34.10	9.08	39.26	81.45	85.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

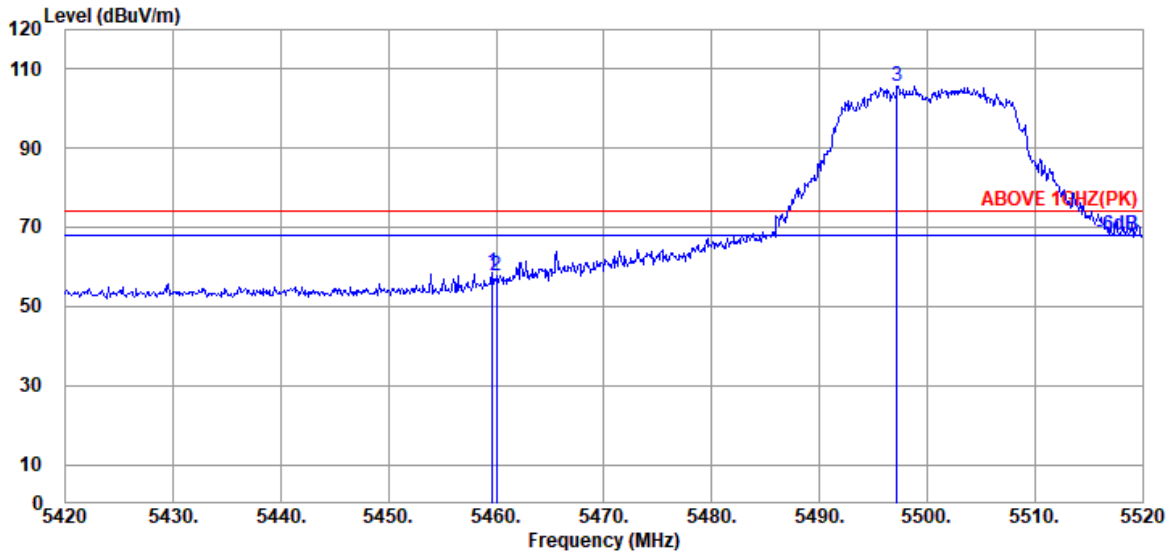

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	54.76	58.75	74.00	15.25	Peak
5460.000	34.20	9.05	39.26	53.85	57.84	74.00	16.16	Peak
@ 5497.200	34.10	9.08	39.26	101.79	105.71	---	---	Peak

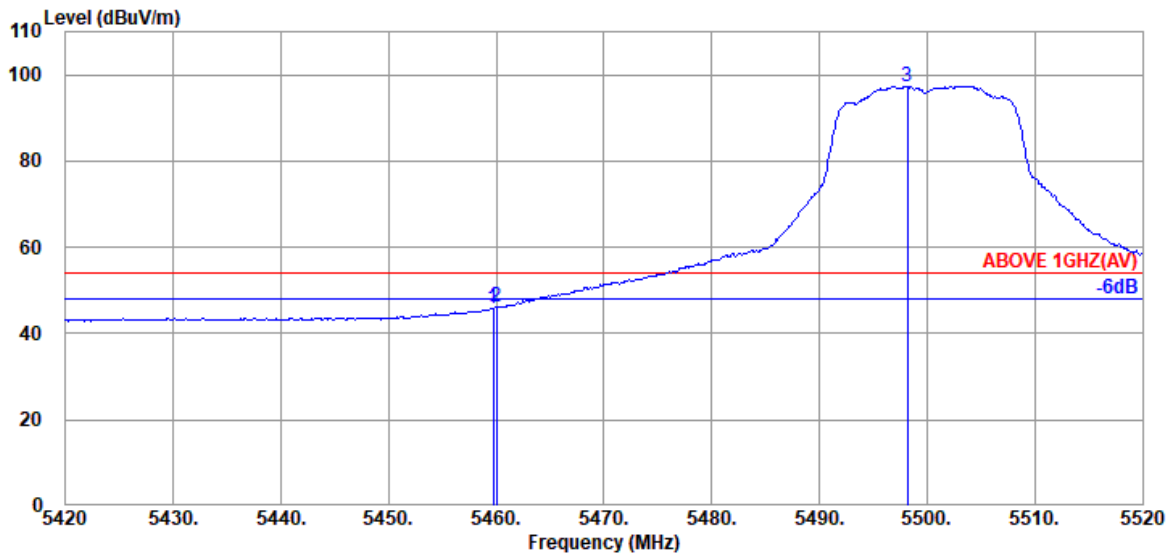


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.20	9.05	39.26	41.87	45.86	54.00	8.14	Average
5460.000	34.20	9.05	39.26	42.31	46.30	54.00	7.70	Average
@ 5498.200	34.10	9.08	39.26	93.47	97.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

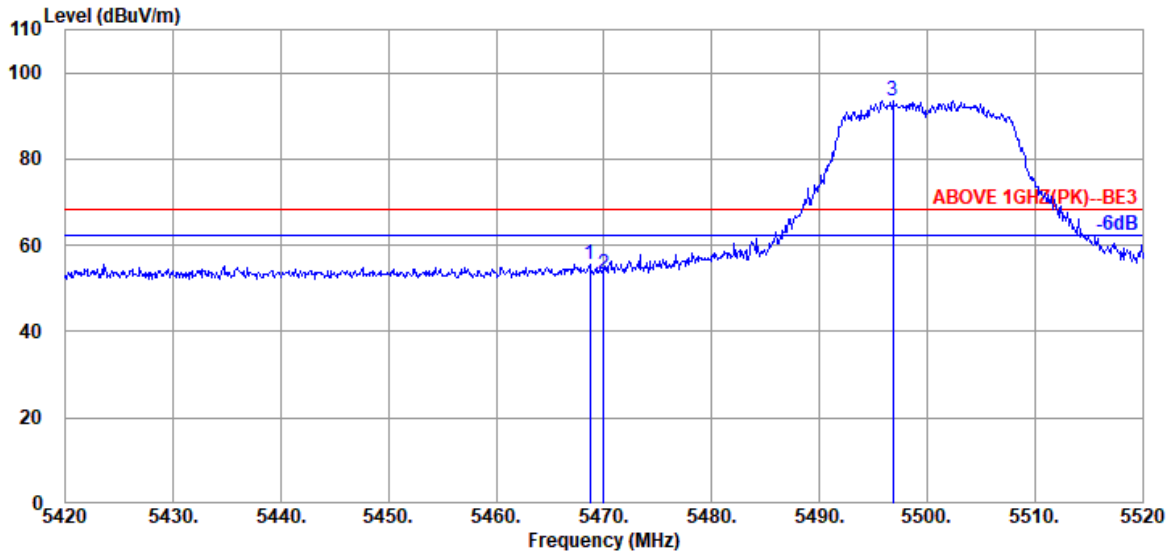

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.700	34.17	9.06	39.26	51.77	55.74	68.20	12.46	Peak
5470.000	34.17	9.06	39.26	49.37	53.34	68.20	14.86	Peak
5496.800	34.10	9.08	39.26	89.71	93.63	---	---	Peak

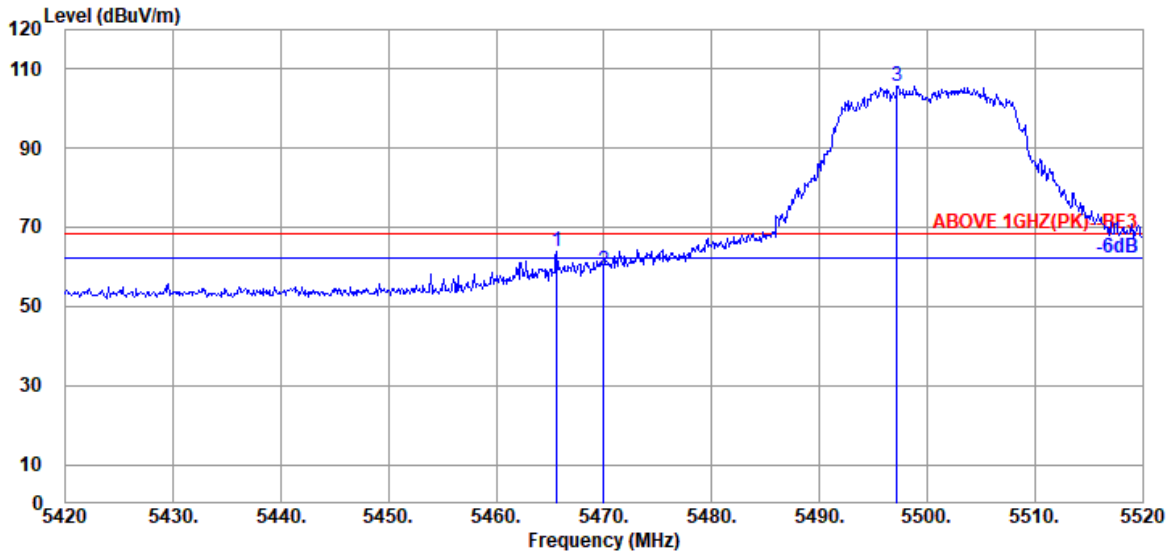


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5465.600	34.17	9.06	39.26	60.10	64.07	68.20	4.13	Peak
5470.000	34.17	9.06	39.26	55.20	59.17	68.20	9.03	Peak
5497.200	34.10	9.08	39.26	101.79	105.71	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

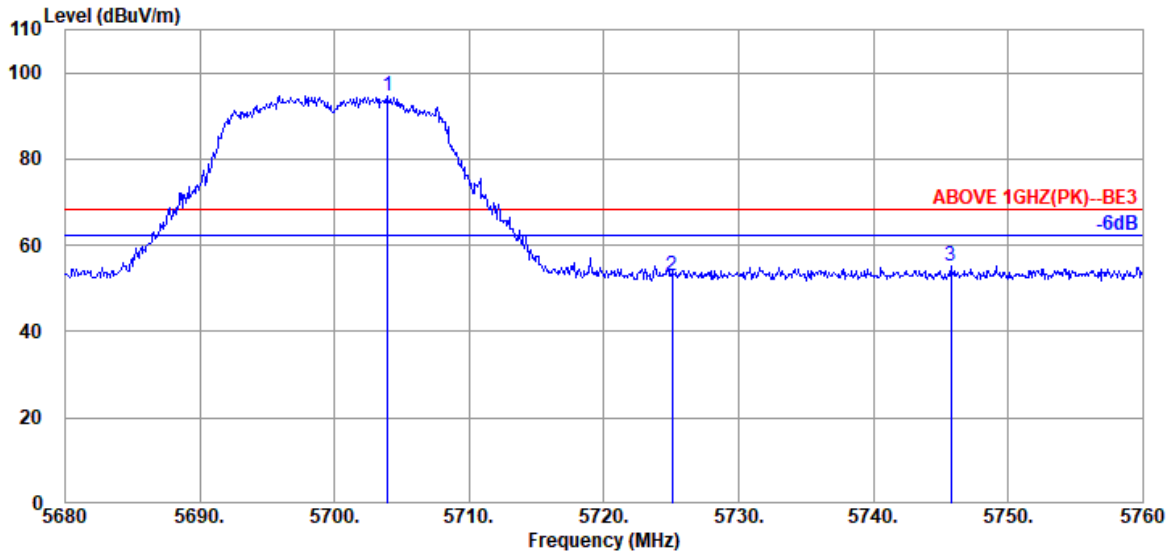

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.920	33.80	9.18	39.30	91.08	94.76	---	---	Peak
5725.040	33.80	9.20	39.30	49.33	53.03	68.20	15.17	Peak
5745.760	33.80	9.20	39.31	51.50	55.19	68.20	13.01	Peak

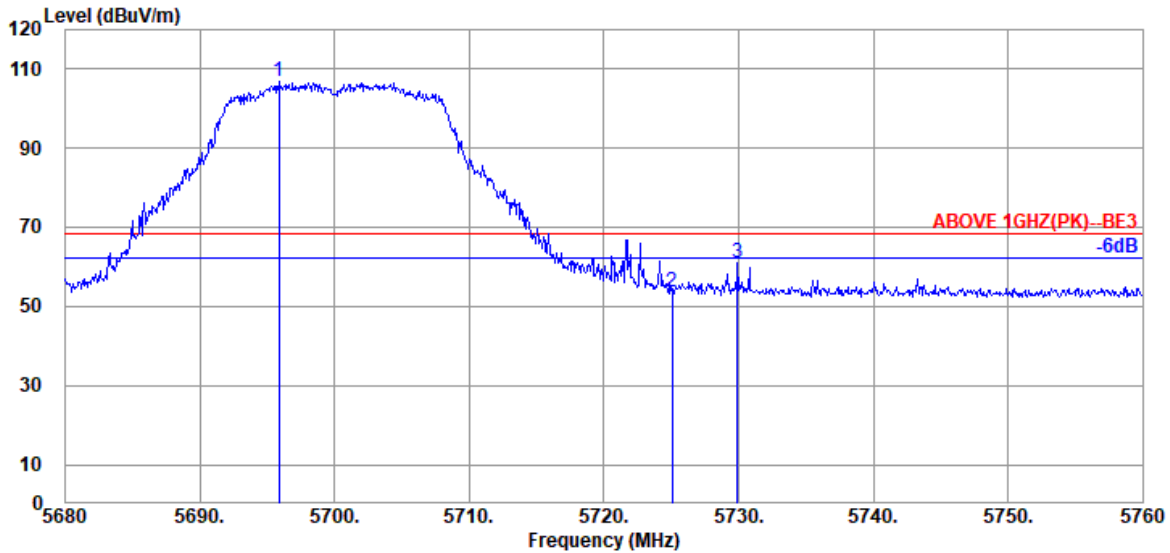


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.840	33.80	9.18	39.30	103.10	106.78	---	---	Peak
5725.040	33.80	9.20	39.30	50.08	53.78	68.20	14.42	Peak
5729.920	33.80	9.20	39.31	57.52	61.21	68.20	6.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

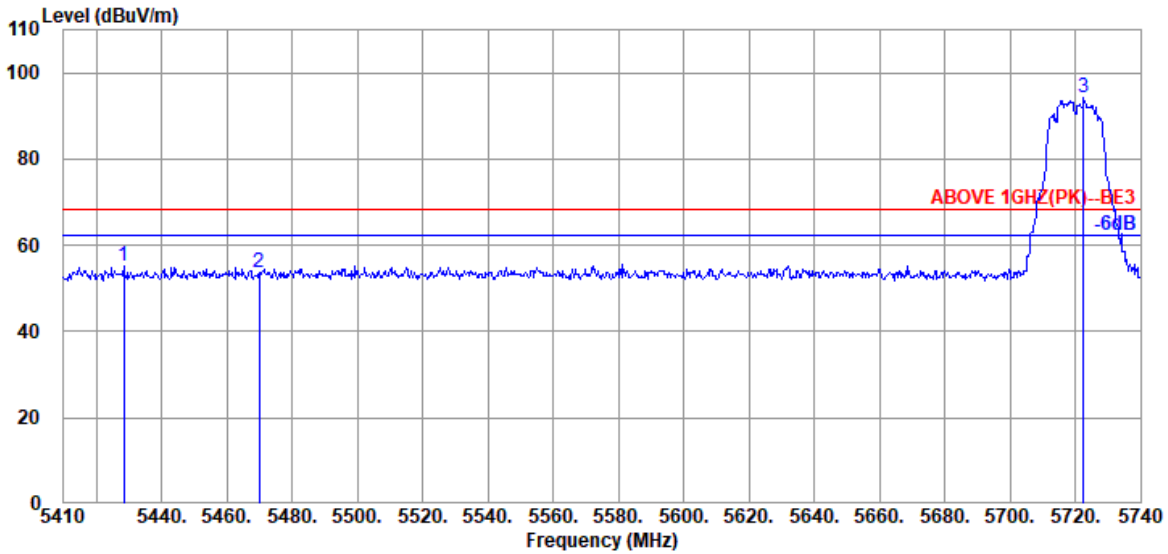

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5428.480	34.15	9.04	39.27	51.14	55.06	68.20	13.14	Peak
5470.060	34.17	9.06	39.26	49.53	53.50	68.20	14.70	Peak
5722.510	33.80	9.20	39.30	90.72	94.42	---	---	Peak

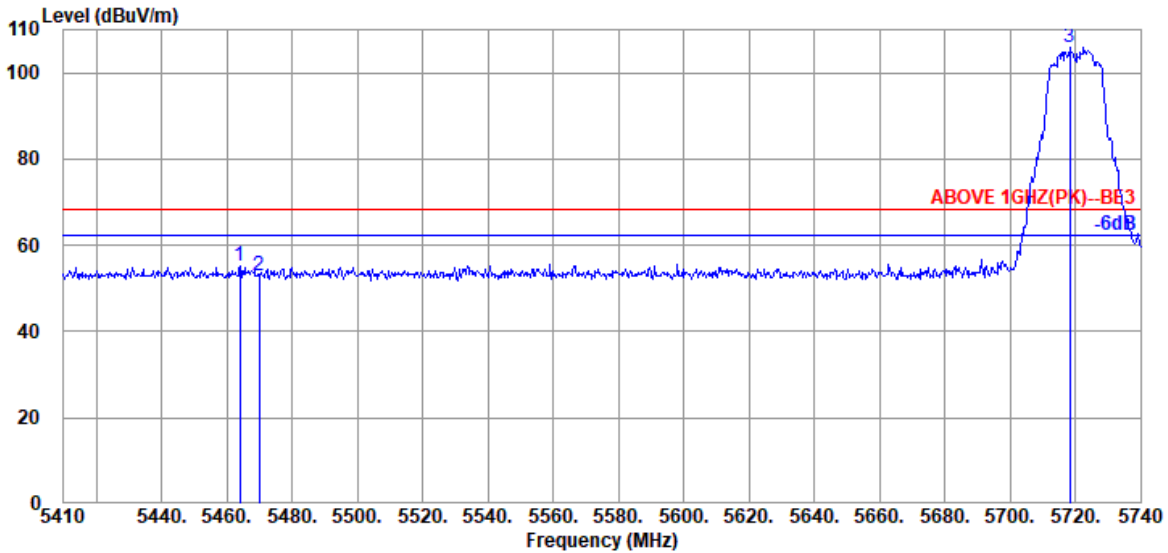


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5464.120	34.17	9.06	39.26	51.05	55.02	68.20	13.18	Peak
5470.060	34.17	9.06	39.26	48.94	52.91	68.20	15.29	Peak
5718.220	33.80	9.19	39.30	102.29	105.98	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

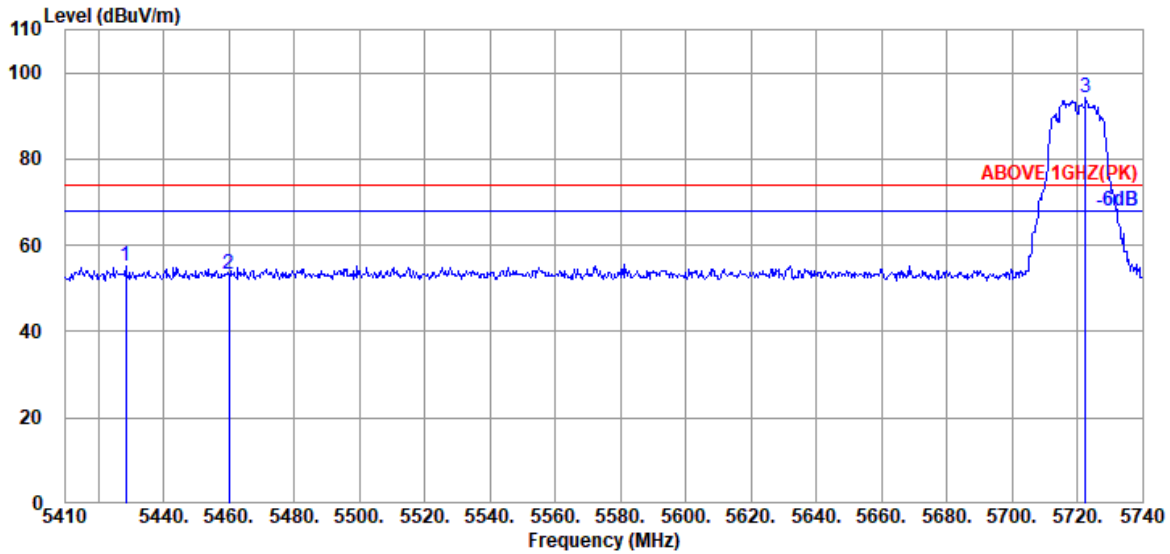

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5428.480	34.15	9.04	39.27	51.14	55.06	---	---	Peak
5460.160	34.20	9.05	39.26	49.40	53.39	68.20	14.81	Peak
5722.510	33.80	9.20	39.30	90.72	94.42	68.20	-26.22	Peak

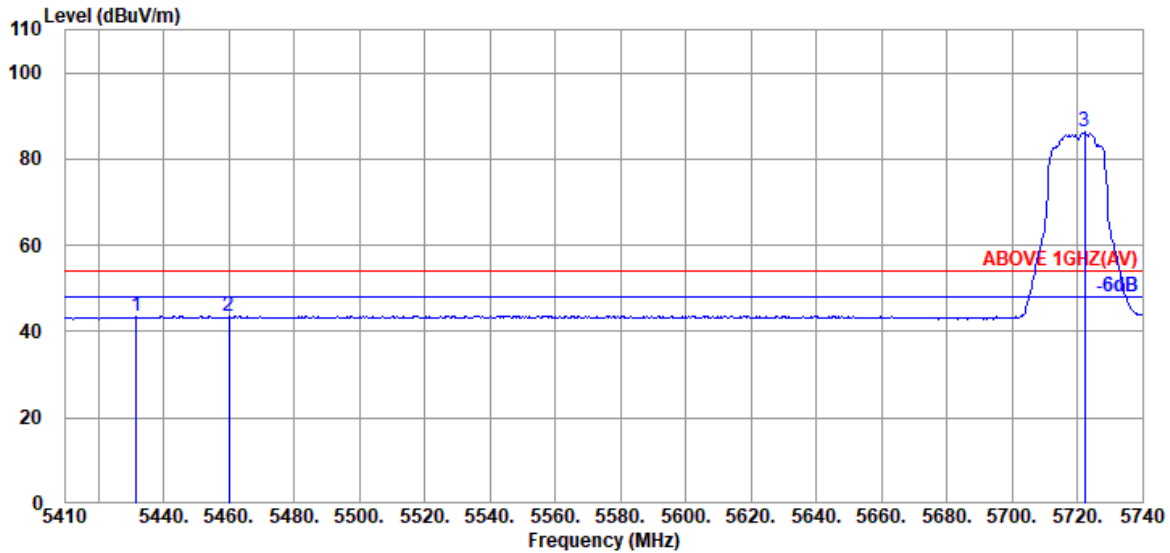


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5431.780	34.15	9.04	39.27	39.58	43.50	---	---	Peak
5460.160	34.20	9.05	39.26	39.42	43.41	68.20	24.79	Peak
5722.180	33.80	9.20	39.30	82.48	86.18	68.20	-17.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

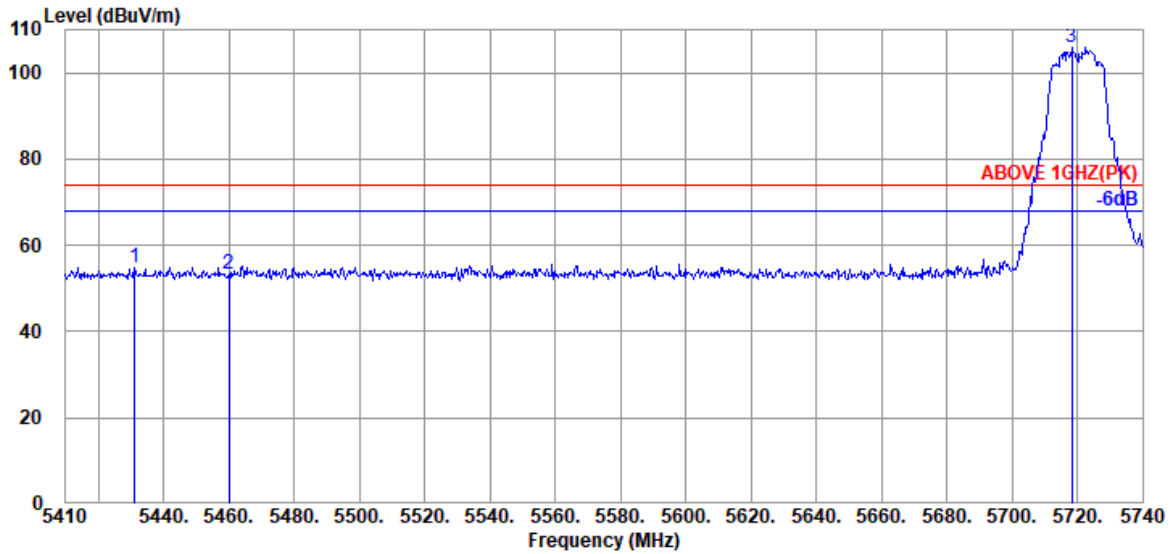

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.120	34.15	9.04	39.27	50.93	54.85	74.00	19.15	Peak
5460.160	34.20	9.05	39.26	49.47	53.46	74.00	20.54	Peak
@ 5718.220	33.80	9.19	39.30	102.29	105.98	---	---	Peak

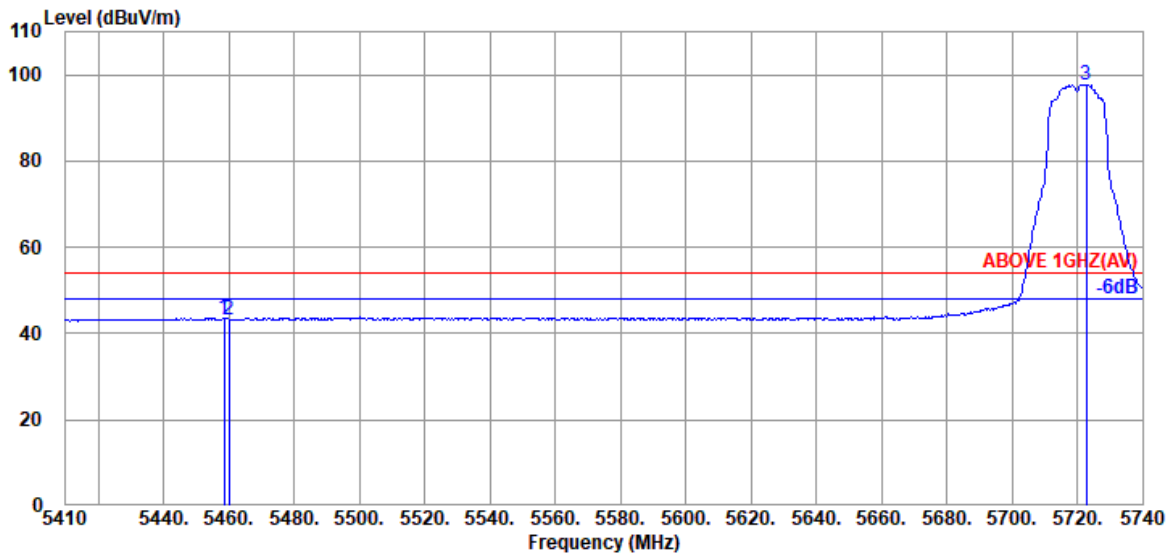


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.20	9.05	39.26	39.59	43.58	54.00	10.42	Average
5460.160	34.20	9.05	39.26	39.25	43.24	54.00	10.76	Average
@ 5722.840	33.80	9.20	39.30	93.94	97.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

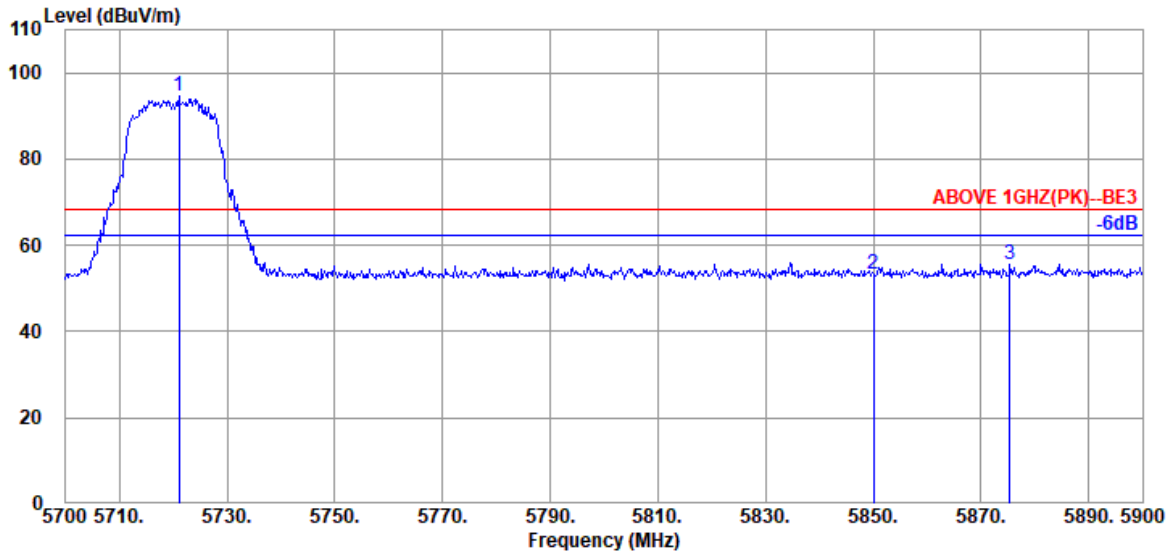

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5721.000	33.80	9.19	39.30	90.99	94.68	74.00	-20.68	Peak
5850.000	34.10	9.25	39.33	49.26	53.28	74.00	20.72	Peak
@ 5875.400	34.10	9.27	39.33	51.57	55.61	---	---	Peak

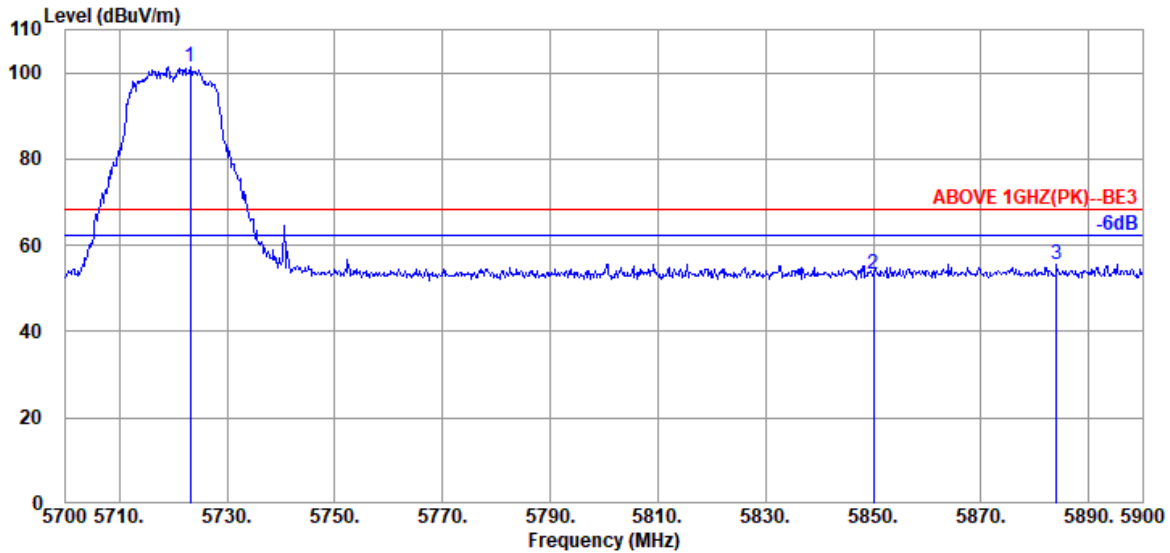


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5723.200	33.80	9.20	39.30	97.76	101.46	54.00	-47.46	Average
5850.000	34.10	9.25	39.33	49.44	53.46	54.00	0.54	Average
@ 5884.000	34.10	9.27	39.34	51.62	55.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

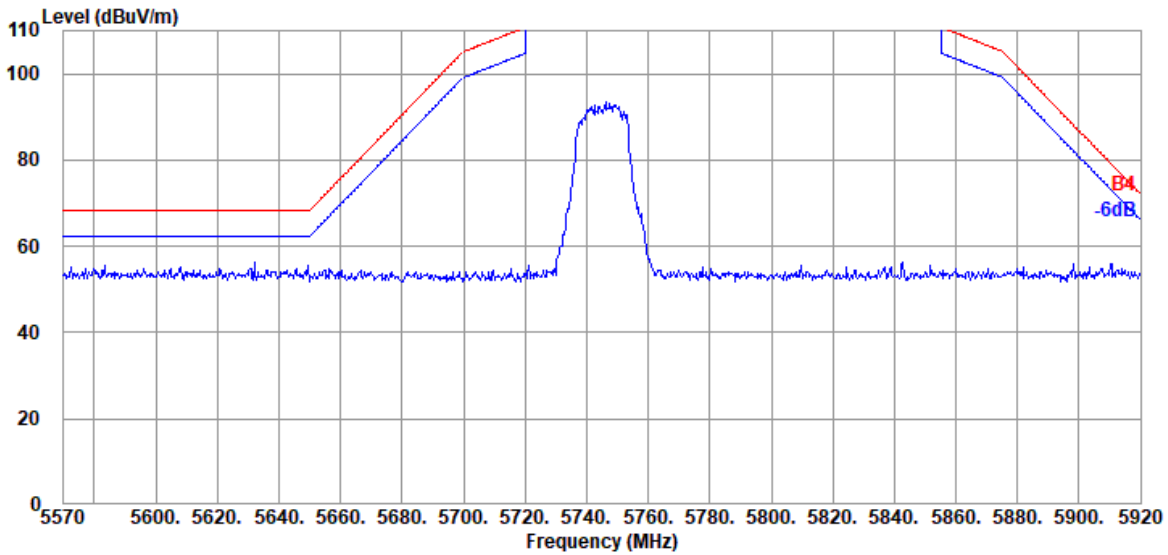


Antenna at Vertical Polarization

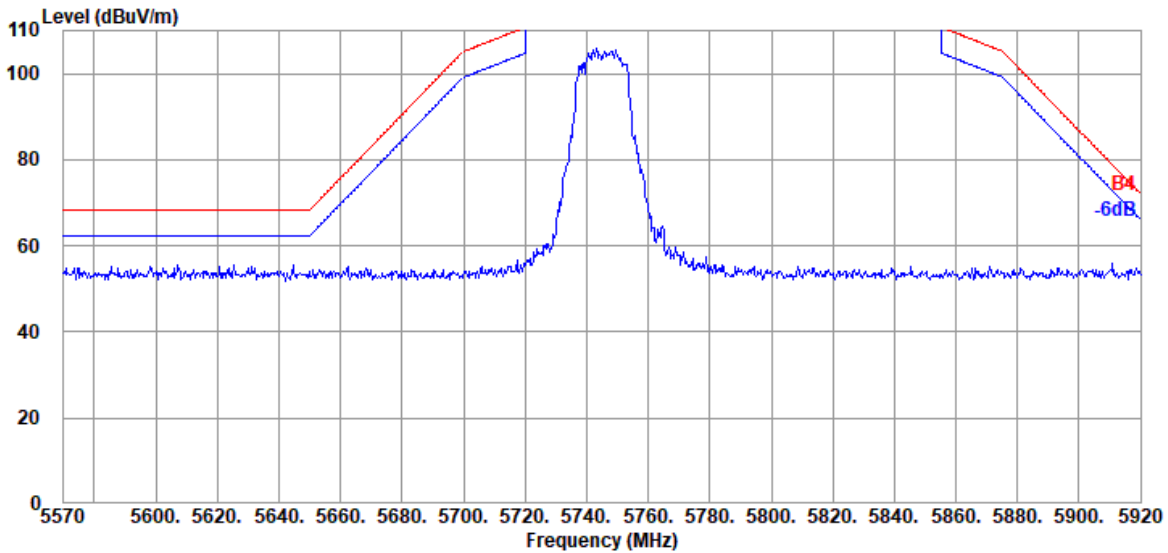


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

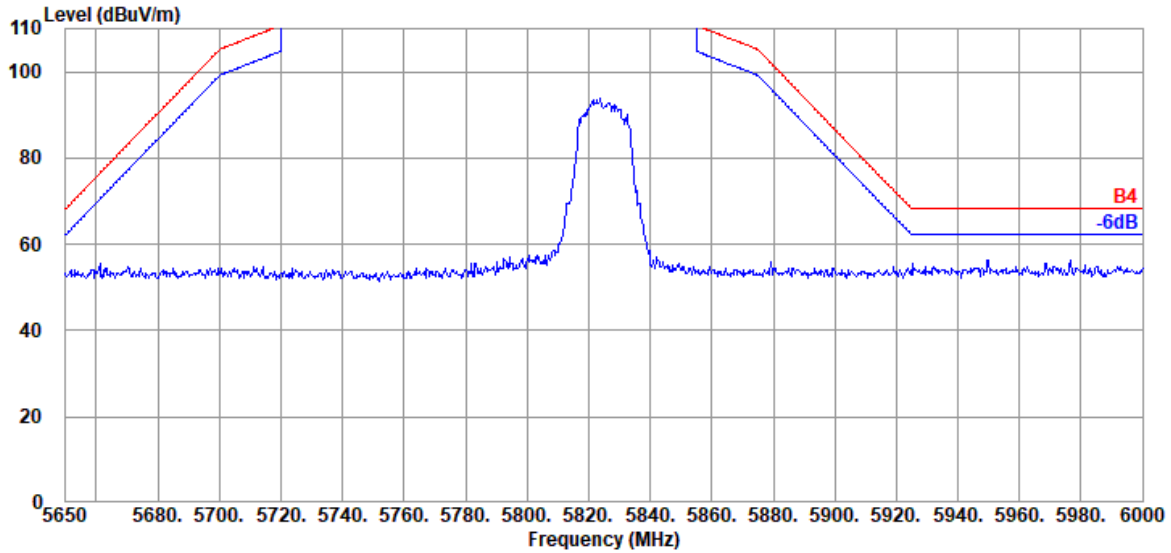

Antenna at Vertical Polarization

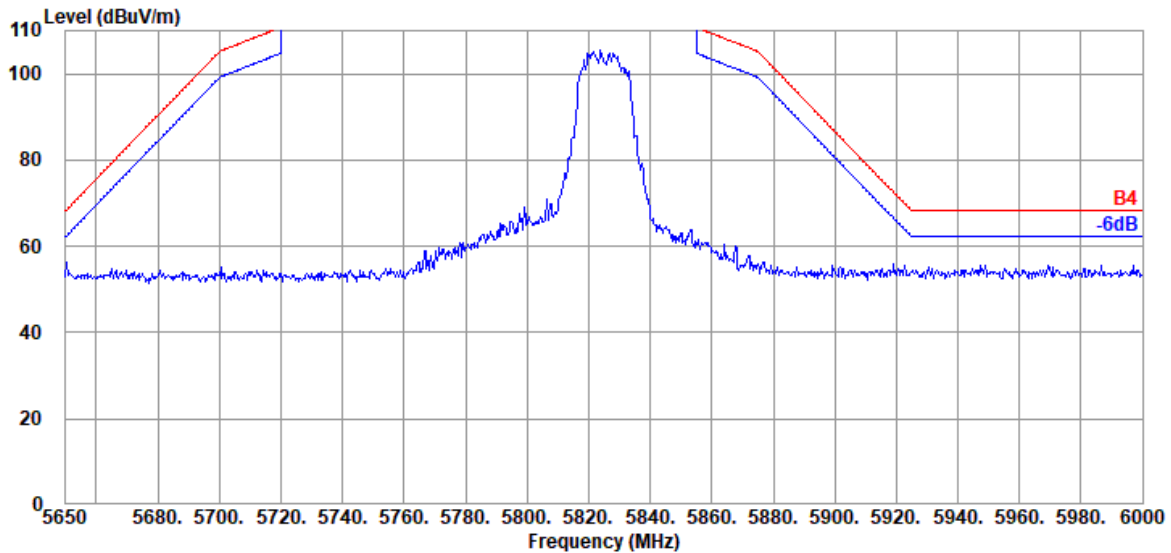


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

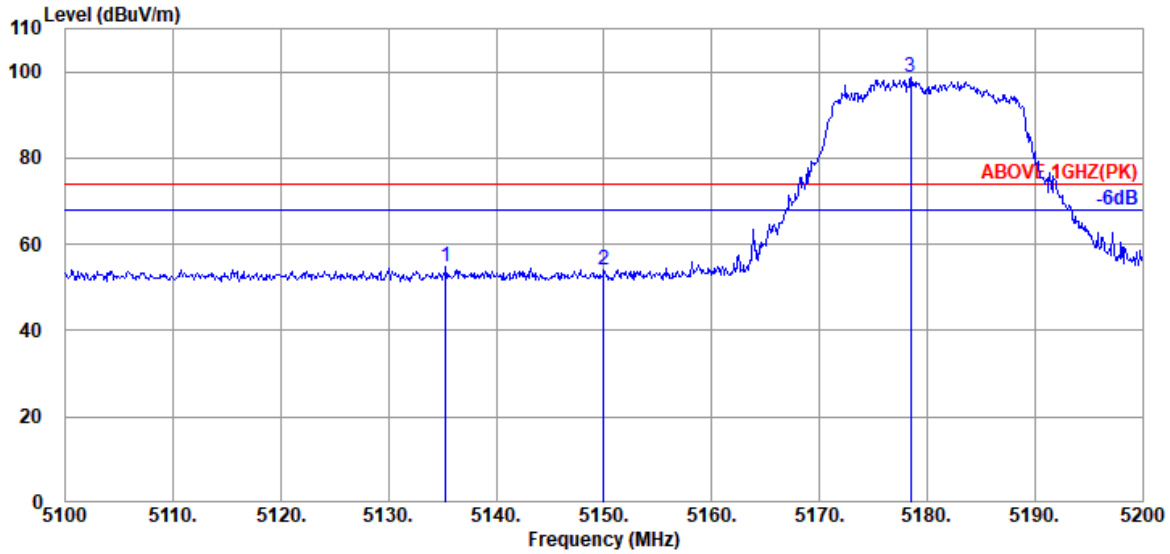

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.300	33.70	8.88	39.29	51.66	54.95	74.00	19.05	Peak
5150.000	33.70	8.88	39.29	50.73	54.02	74.00	19.98	Peak
@ 5178.500	33.70	8.90	39.28	95.33	98.65	---	---	Peak

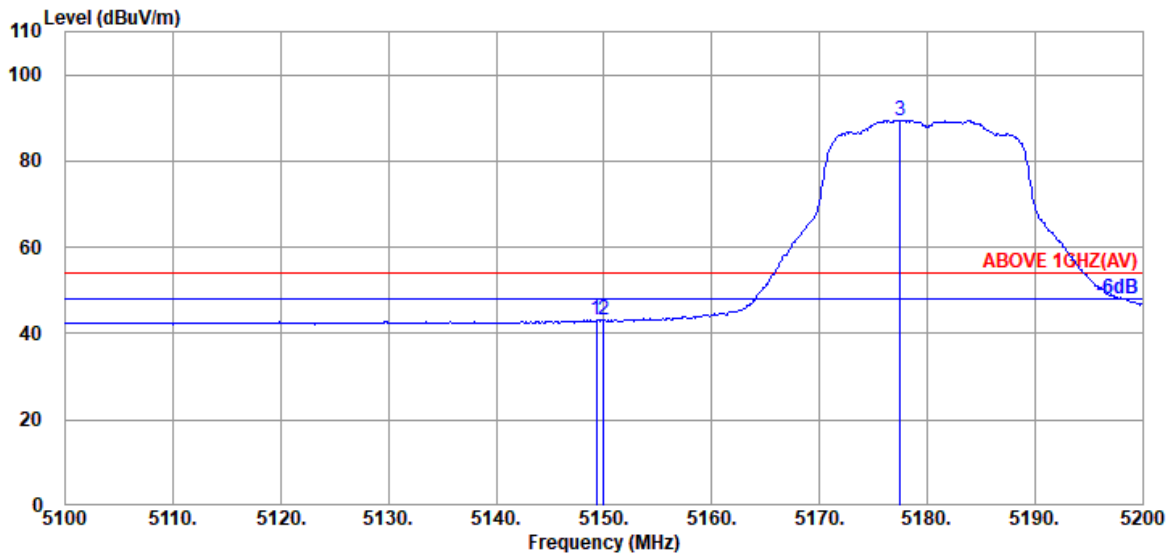


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.88	39.29	39.82	43.11	54.00	10.89	Average
5150.000	33.70	8.88	39.29	39.86	43.15	54.00	10.85	Average
@ 5177.500	33.70	8.90	39.28	86.18	89.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

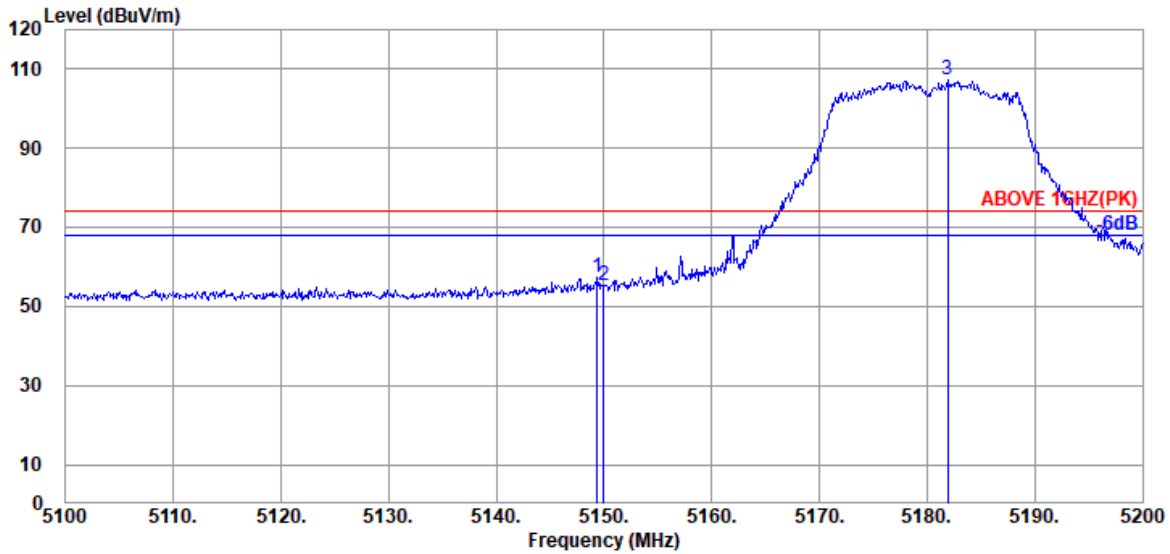

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.88	39.29	53.90	57.19	74.00	16.81	Peak
5150.000	33.70	8.88	39.29	52.08	55.37	74.00	18.63	Peak
@ 5181.900	33.70	8.90	39.28	103.83	107.15	---	---	Peak

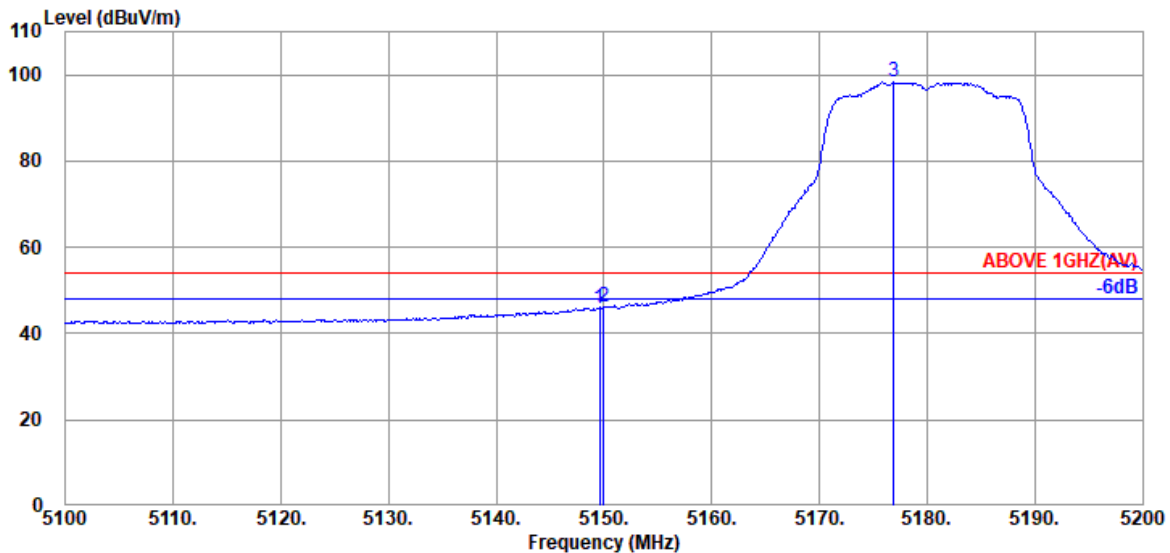


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.88	39.29	42.63	45.92	54.00	8.08	Average
5150.000	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5176.900	33.70	8.90	39.28	94.95	98.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

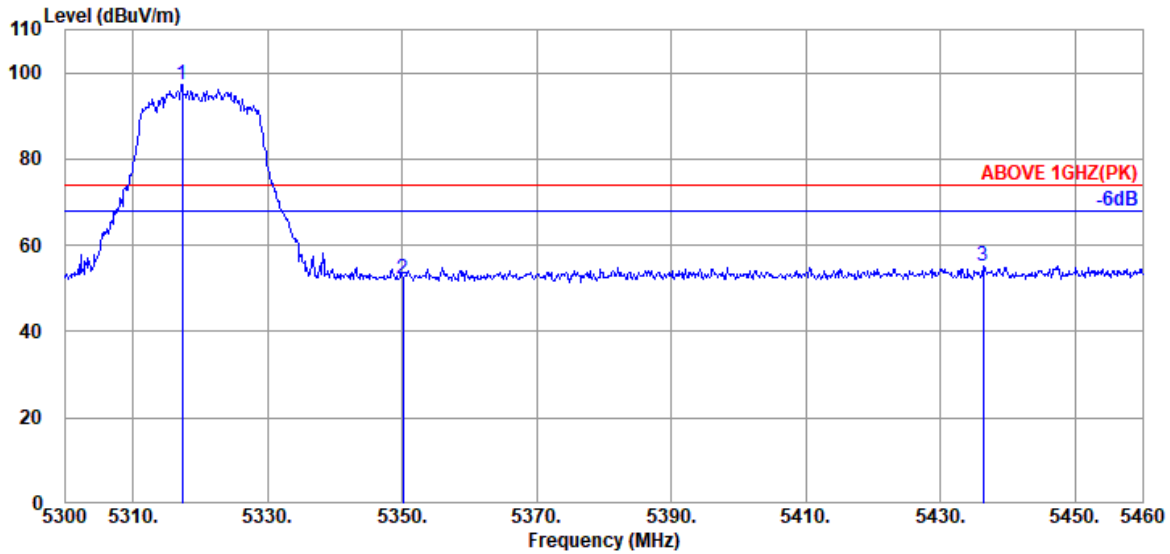

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.03	8.98	39.27	93.36	97.10	---	---	Peak
5350.080	33.90	8.99	39.27	48.50	52.12	74.00	21.88	Peak
5436.320	34.17	9.04	39.26	51.18	55.13	74.00	18.87	Peak

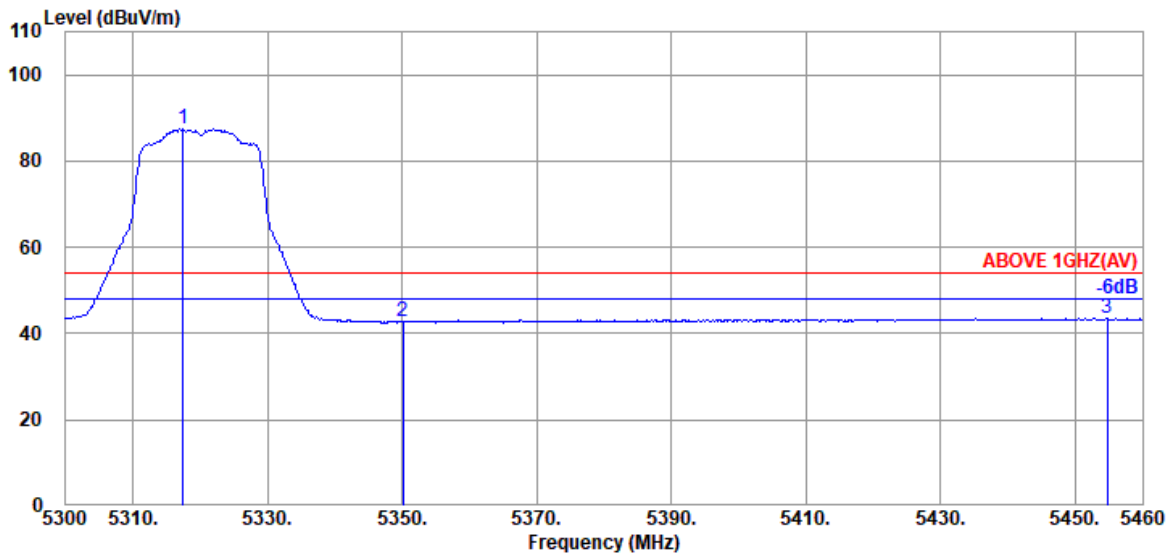


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.03	8.98	39.27	83.66	87.40	---	---	Average
5350.080	33.90	8.99	39.27	39.05	42.67	54.00	11.33	Average
5454.720	34.20	9.05	39.26	39.59	43.58	54.00	10.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

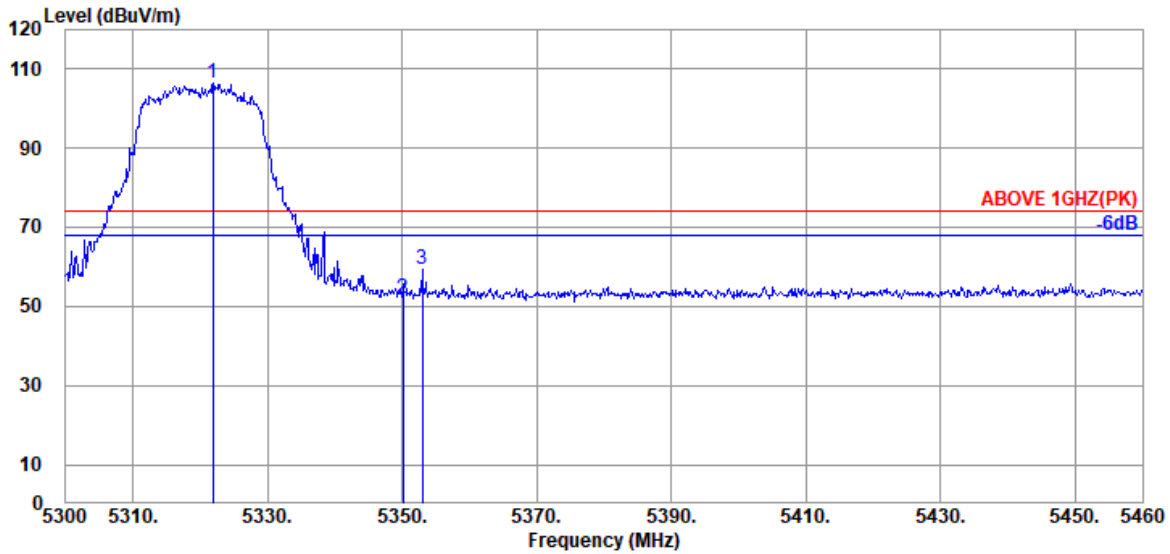

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	34.03	8.98	39.27	102.71	106.45	---	---	Peak
5350.080	33.90	8.99	39.27	48.28	51.90	74.00	22.10	Peak
5352.960	33.90	8.99	39.27	55.92	59.54	74.00	14.46	Peak

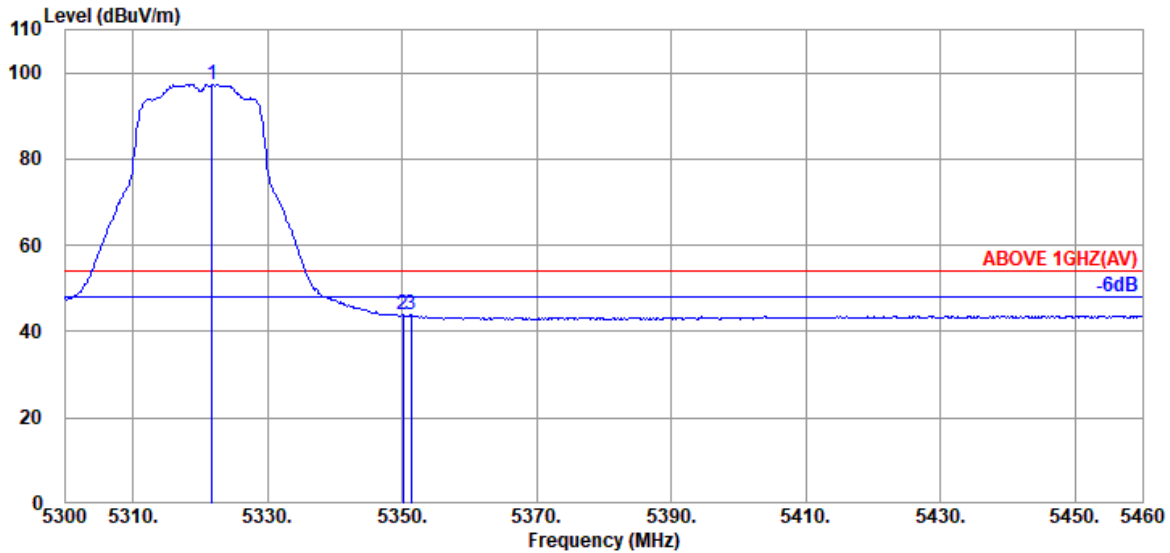


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.03	8.98	39.27	93.44	97.18	---	---	Average
5350.080	33.90	8.99	39.27	40.16	43.78	54.00	10.22	Average
5351.360	33.90	8.99	39.27	40.25	43.87	54.00	10.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

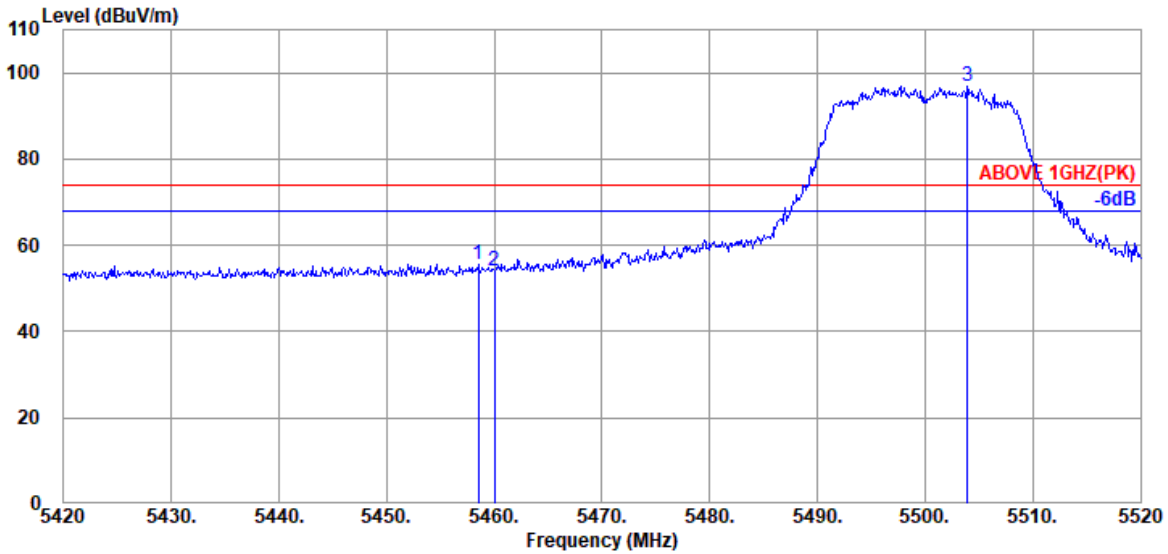

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.20	9.05	39.26	51.52	55.51	74.00	18.49	Peak
5460.000	34.20	9.05	39.26	49.99	53.98	74.00	20.02	Peak
@ 5503.900	34.10	9.08	39.26	92.78	96.70	---	---	Peak

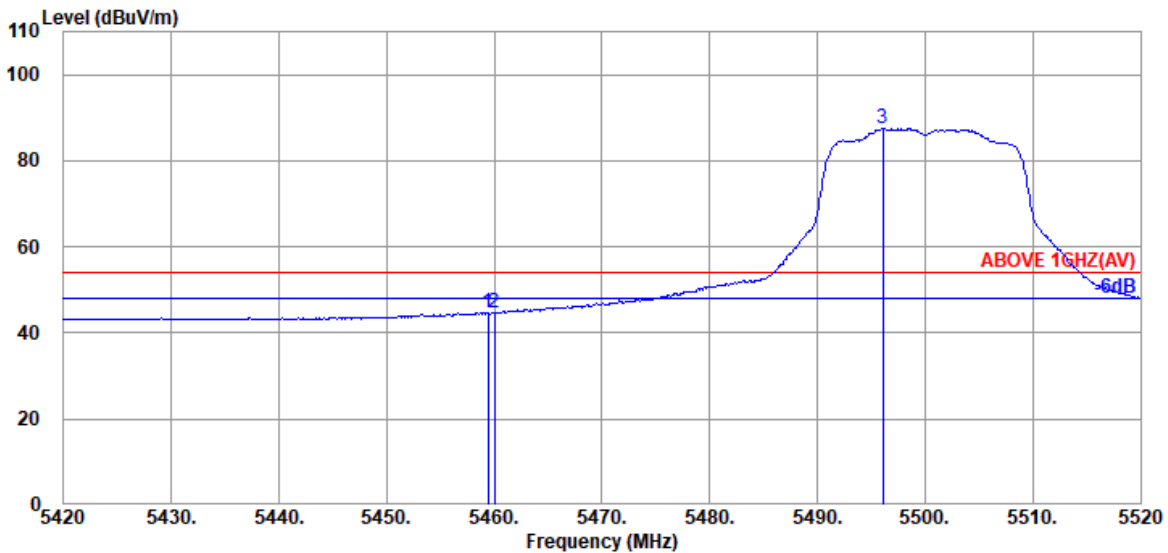


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.20	9.05	39.26	40.63	44.62	54.00	9.38	Average
5460.000	34.20	9.05	39.26	40.61	44.60	54.00	9.40	Average
@ 5496.100	34.10	9.08	39.26	83.60	87.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

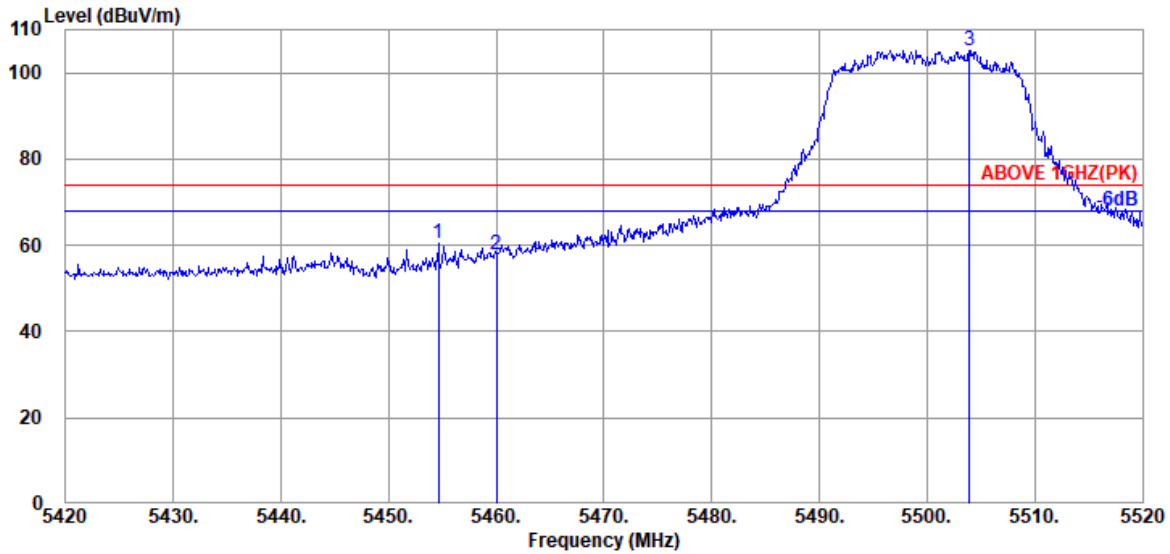

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.600	34.20	9.05	39.26	56.47	60.46	74.00	13.54	Peak
5460.000	34.20	9.05	39.26	53.65	57.64	74.00	16.36	Peak
@ 5503.900	34.10	9.08	39.26	101.38	105.30	---	---	Peak

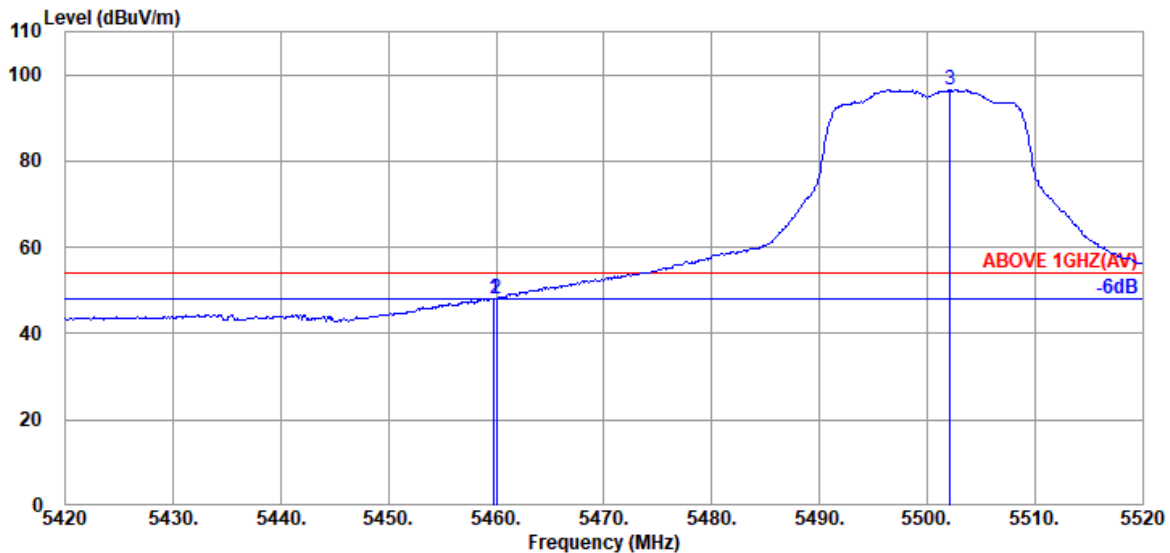


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.20	9.05	39.26	44.19	48.18	54.00	5.82	Average
5460.000	34.20	9.05	39.26	44.25	48.24	54.00	5.76	Average
@ 5502.100	34.10	9.08	39.26	92.74	96.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

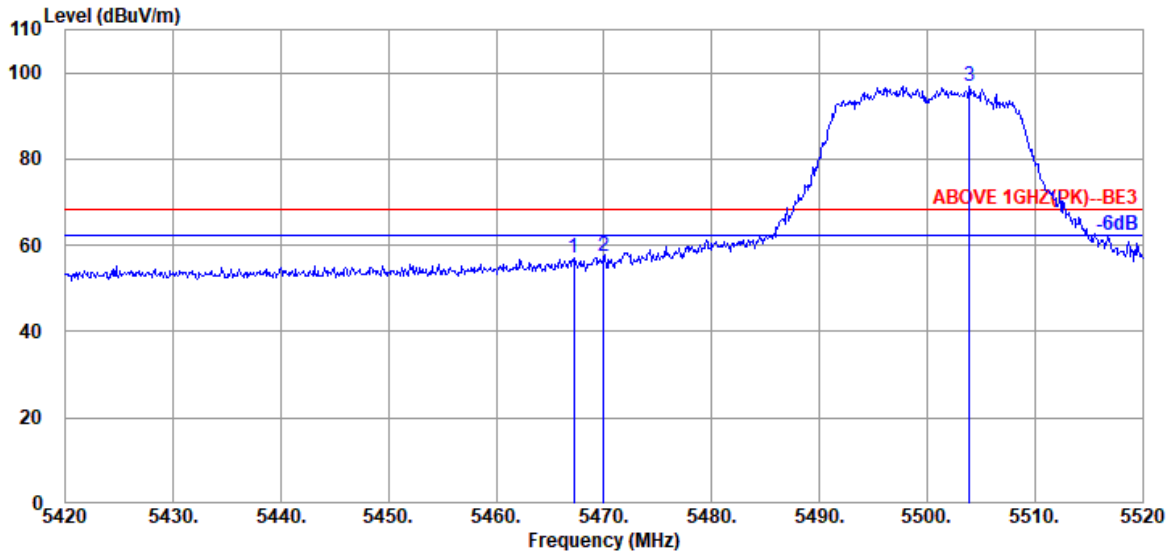

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.17	9.06	39.26	52.93	56.90	68.20	11.30	Peak
5470.000	34.17	9.06	39.26	53.60	57.57	68.20	10.63	Peak
@ 5503.900	34.10	9.08	39.26	92.78	96.70	---	---	Peak

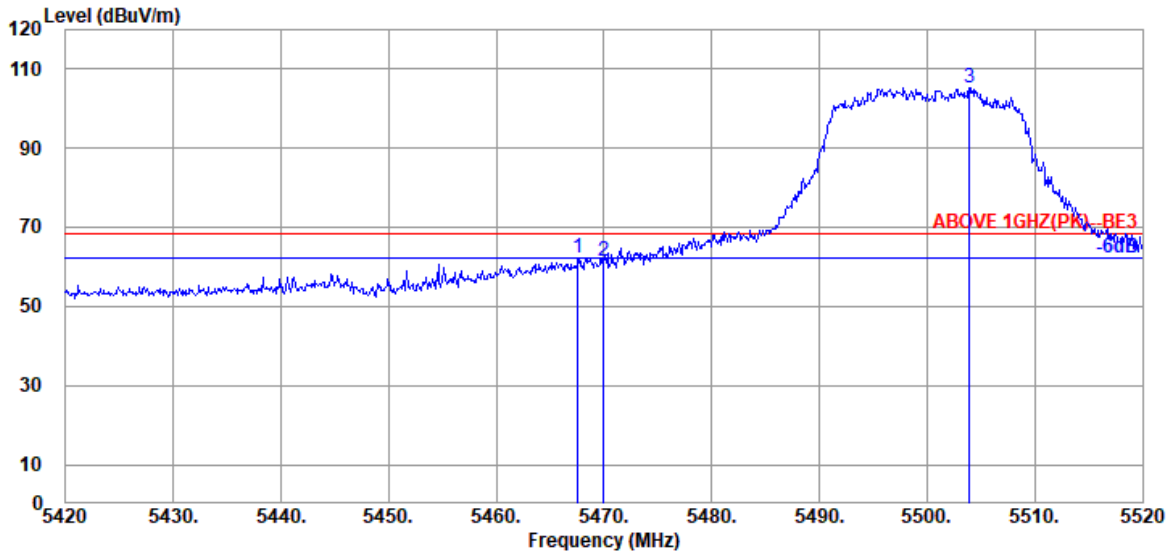


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.17	9.06	39.26	58.33	62.30	68.20	5.90	Peak
5470.000	34.17	9.06	39.26	57.36	61.33	68.20	6.87	Peak
@ 5503.900	34.10	9.08	39.26	101.38	105.30	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

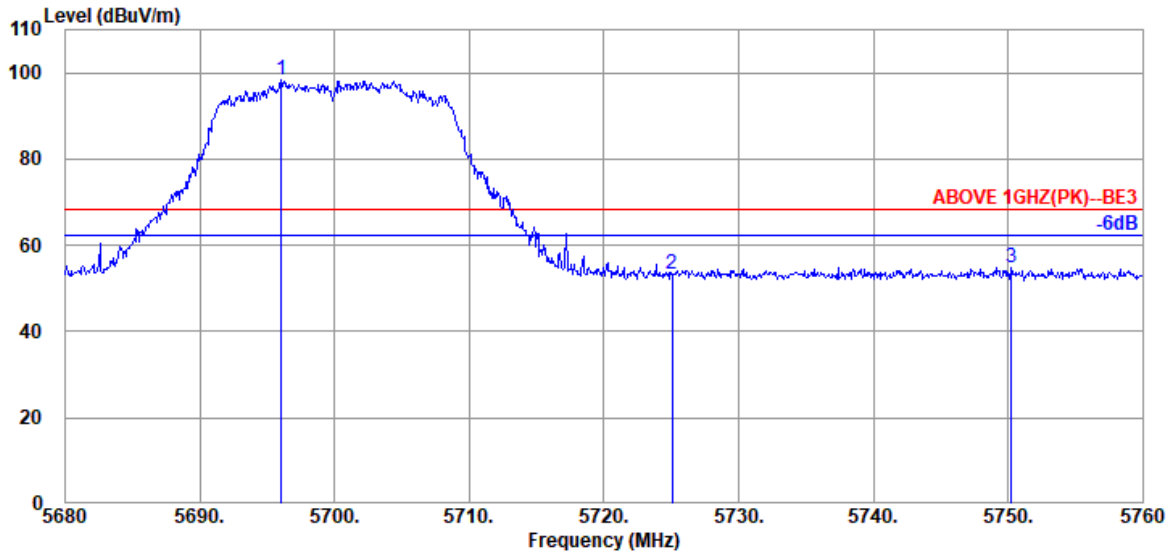

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.000	33.80	9.18	39.30	94.53	98.21	---	---	Peak
5725.040	33.80	9.20	39.30	49.58	53.28	68.20	14.92	Peak
5750.240	33.80	9.20	39.31	51.11	54.80	68.20	13.40	Peak

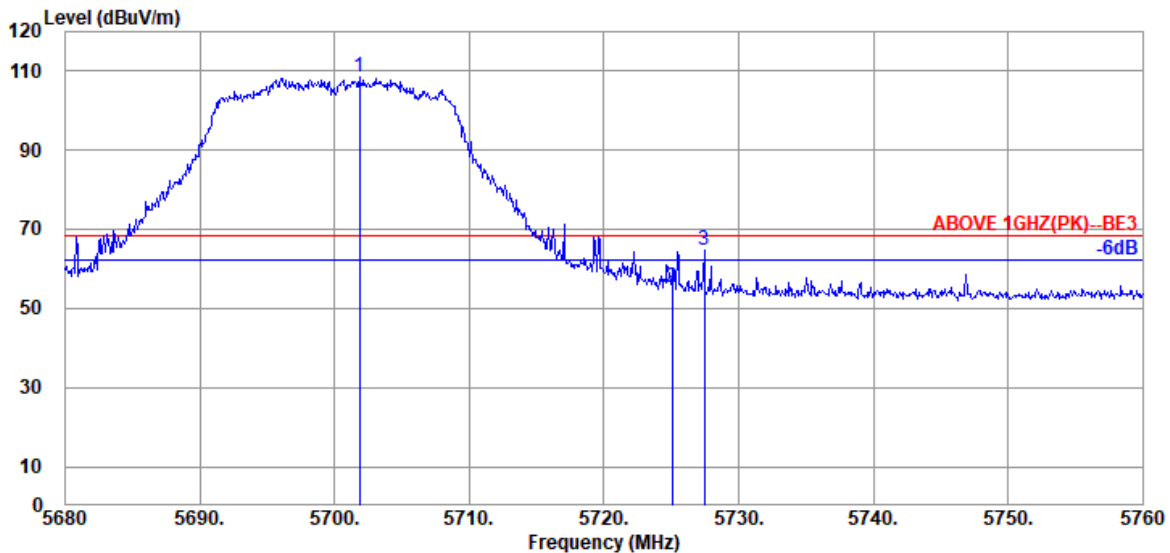


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.840	33.80	9.18	39.30	104.66	108.34	---	---	Peak
5725.040	33.80	9.20	39.30	51.46	55.16	68.20	13.04	Peak
5727.440	33.80	9.20	39.31	61.22	64.91	68.20	3.29	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

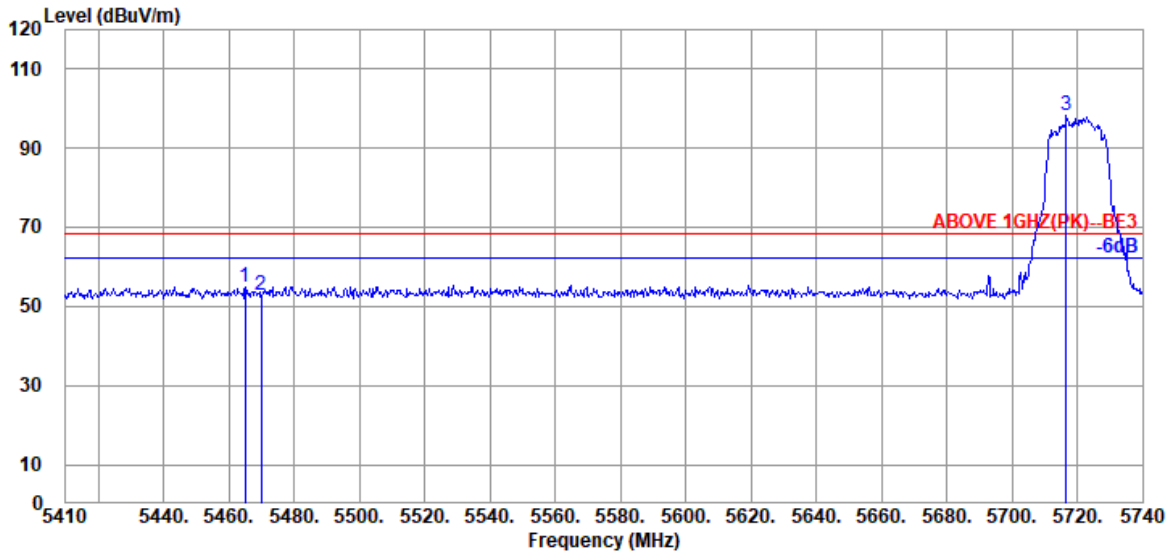

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5465.110	34.17	9.06	39.26	50.89	54.86	68.20	13.34	Peak
5470.060	34.17	9.06	39.26	49.02	52.99	68.20	15.21	Peak
5716.570	33.80	9.19	39.30	94.49	98.18	---	---	Peak

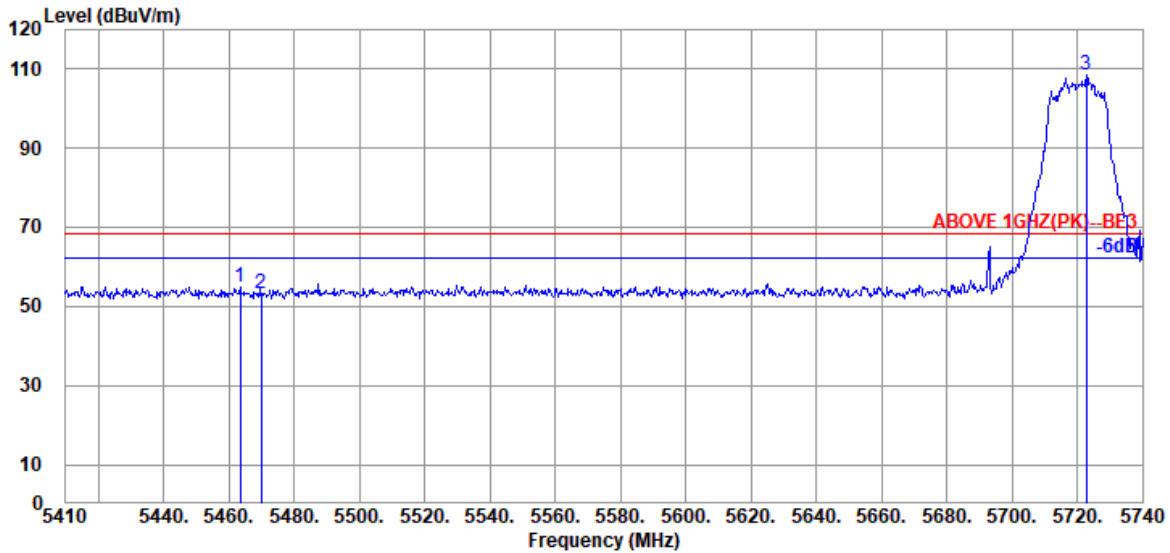

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5463.460	34.20	9.05	39.26	51.09	55.08	68.20	13.12	Peak
5470.060	34.17	9.06	39.26	49.30	53.27	68.20	14.93	Peak
5722.840	33.80	9.20	39.30	104.89	108.59	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

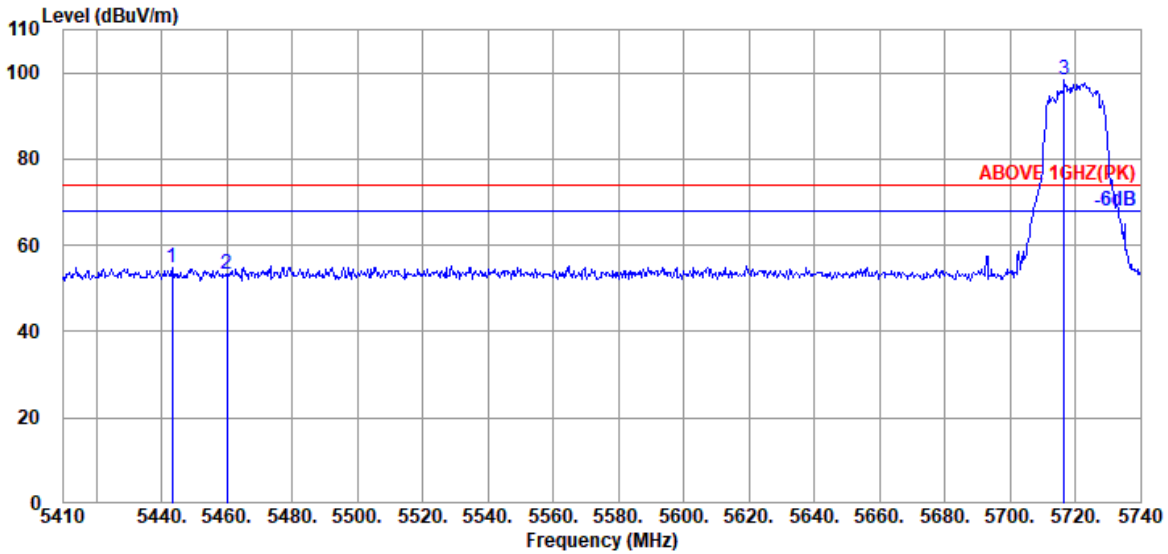

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5443.330	34.17	9.04	39.26	50.85	54.80	68.20	13.40	Peak
5460.160	34.20	9.05	39.26	49.38	53.37	68.20	14.83	Peak
5716.570	33.80	9.19	39.30	94.49	98.18	---	---	Peak

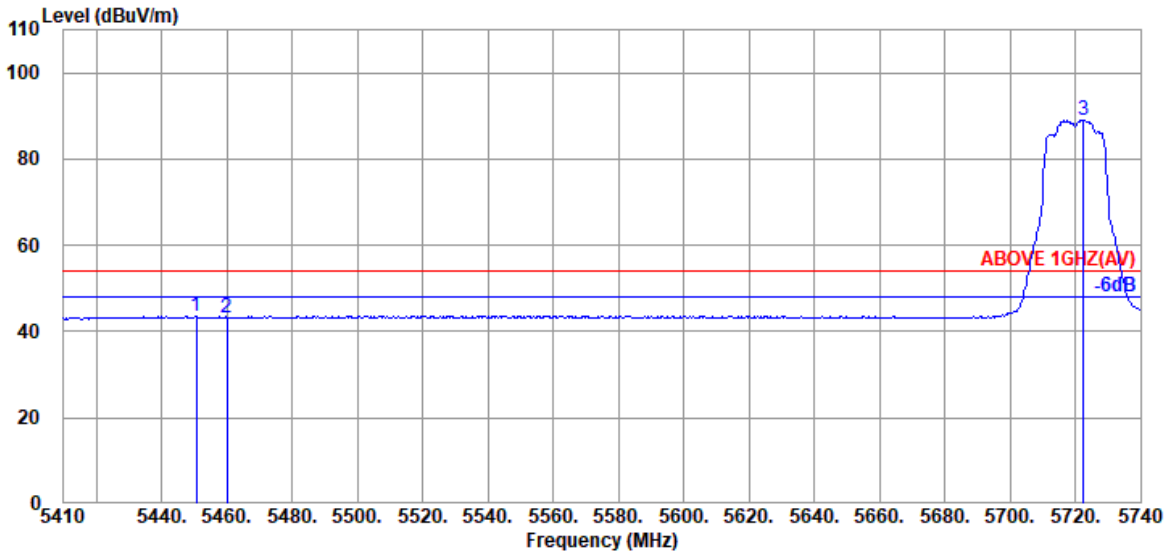

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5450.590	34.20	9.05	39.26	39.65	43.64	68.20	24.56	Peak
5460.160	34.20	9.05	39.26	39.33	43.32	68.20	24.88	Peak
5722.510	33.80	9.20	39.30	85.34	89.04	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

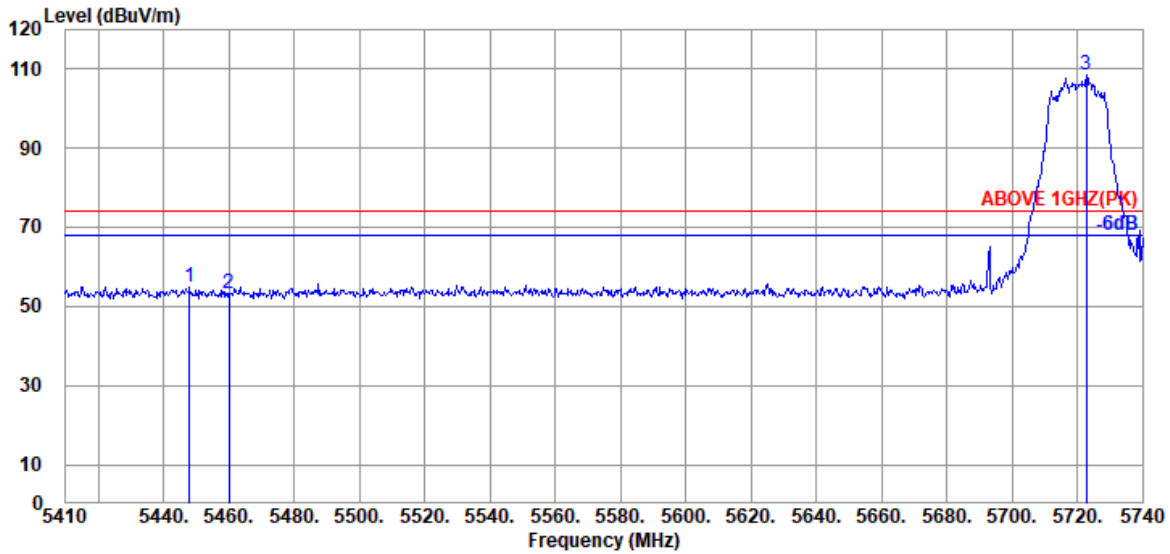

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5447.950	34.20	9.05	39.26	50.82	54.81	68.20	13.39	Peak
5460.160	34.20	9.05	39.26	49.17	53.16	68.20	15.04	Peak
@ 5722.840	33.80	9.20	39.30	104.89	108.59	---	---	Peak

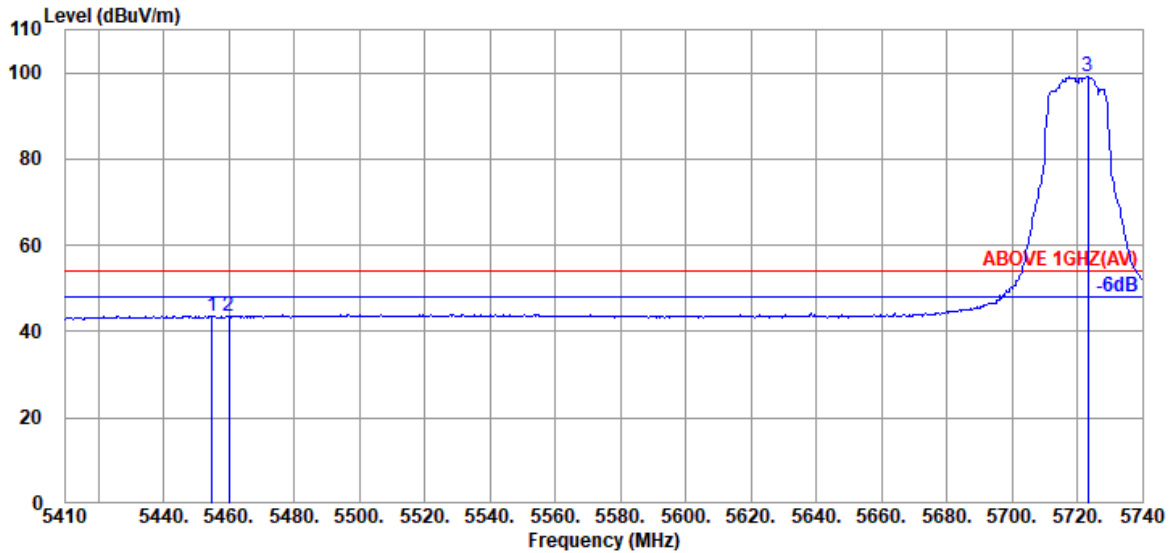


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5454.880	34.20	9.05	39.26	39.55	43.54	68.20	24.66	Peak
5460.160	34.20	9.05	39.26	39.41	43.40	68.20	24.80	Peak
@ 5723.170	33.80	9.20	39.30	95.51	99.21	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

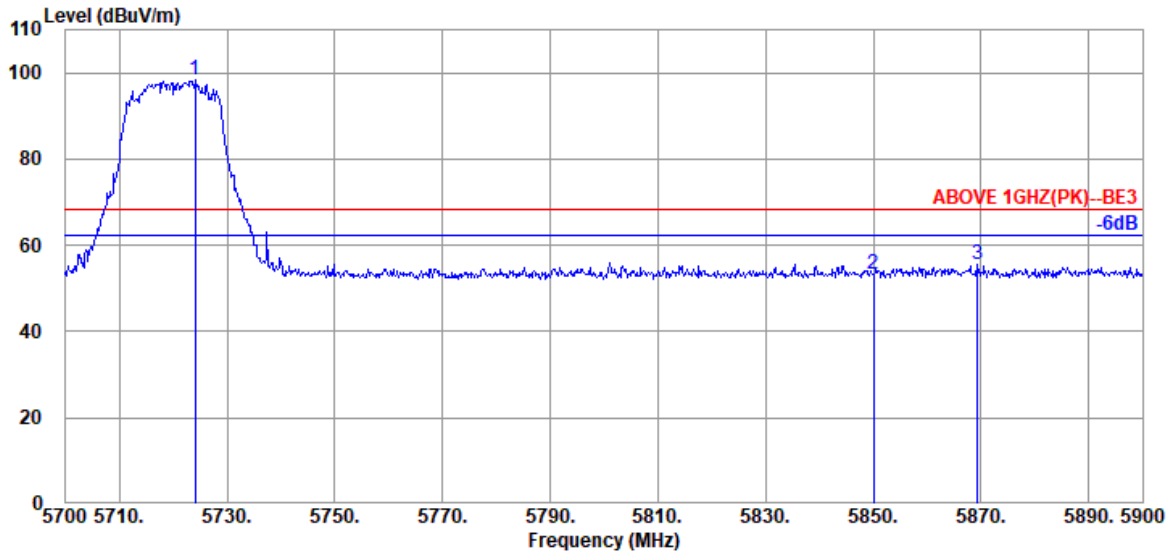

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5724.000	33.80	9.20	39.30	94.48	98.18	---	---	Peak
5850.000	34.10	9.25	39.33	49.27	53.29	68.20	14.91	Peak
@ 5869.400	34.10	9.26	39.33	51.37	55.40	68.20	12.80	Peak

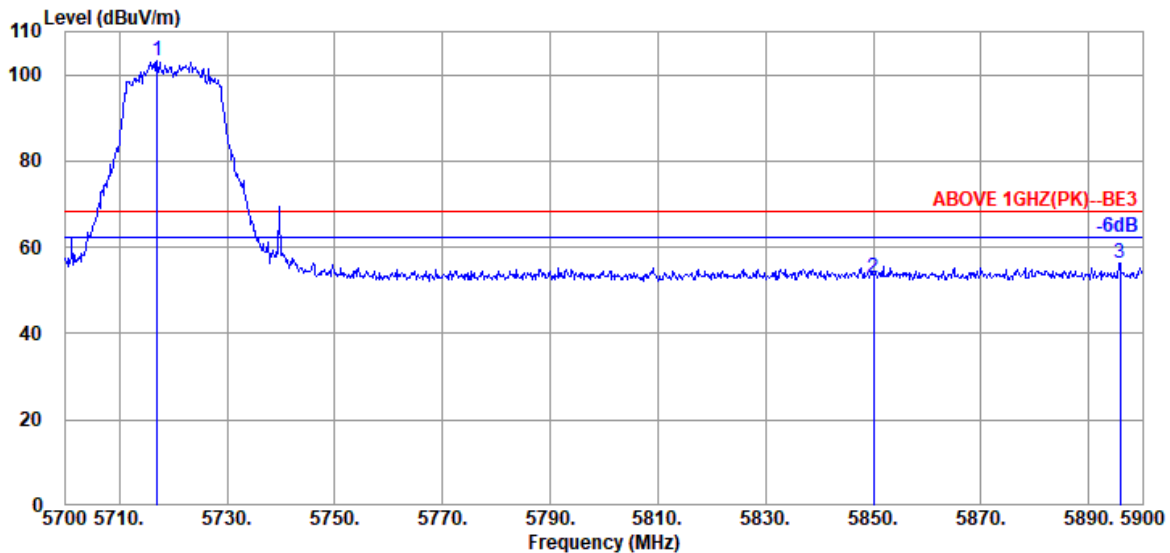


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5717.000	33.80	9.19	39.30	99.66	103.35	---	---	Peak
5850.000	34.10	9.25	39.33	49.04	53.06	68.20	15.14	Peak
@ 5895.800	34.10	9.28	39.34	52.18	56.22	68.20	11.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

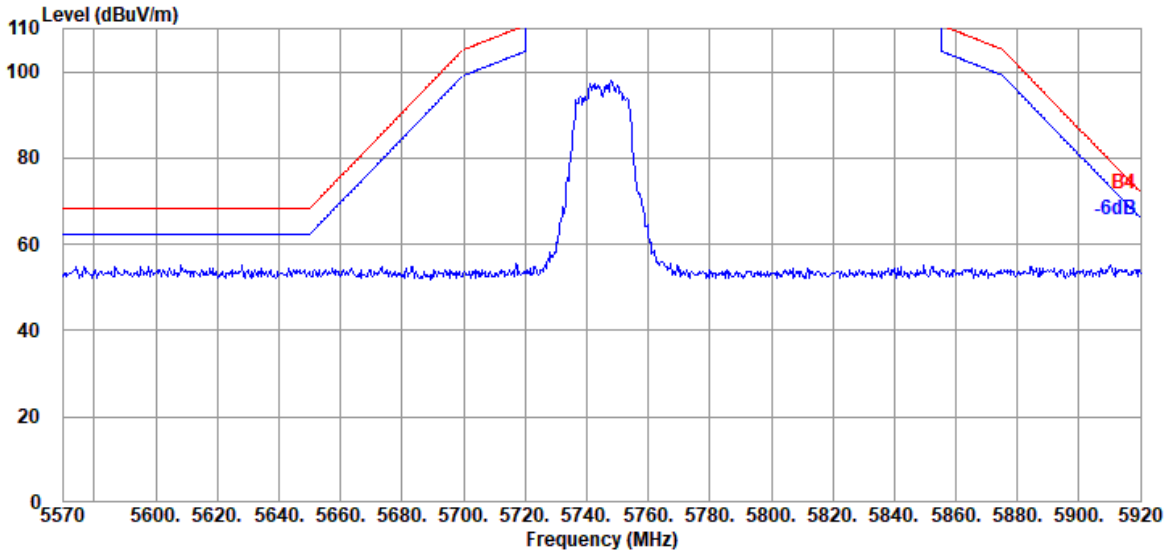


Antenna at Vertical Polarization

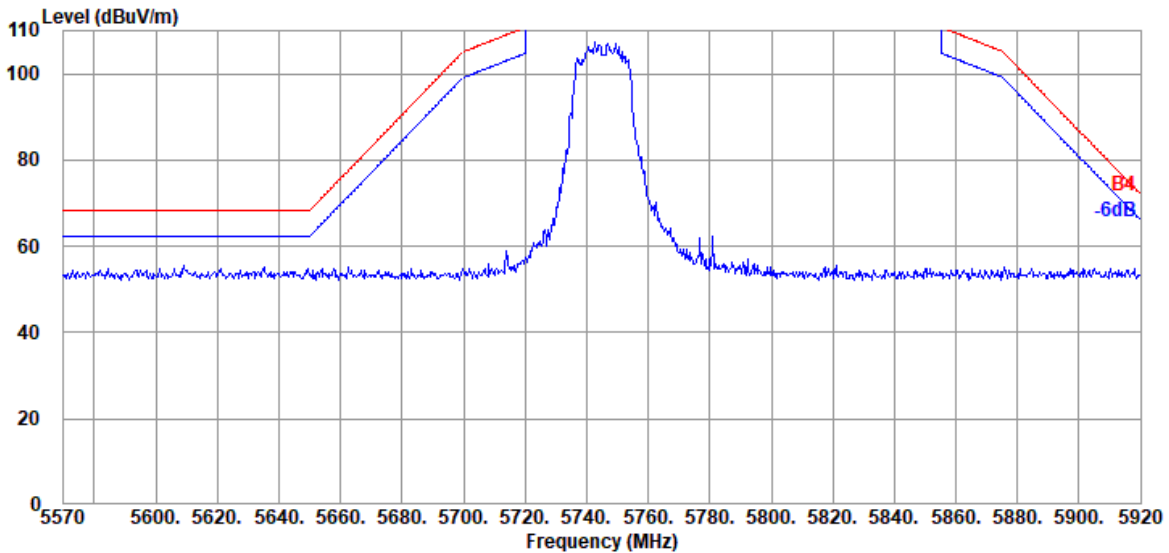


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

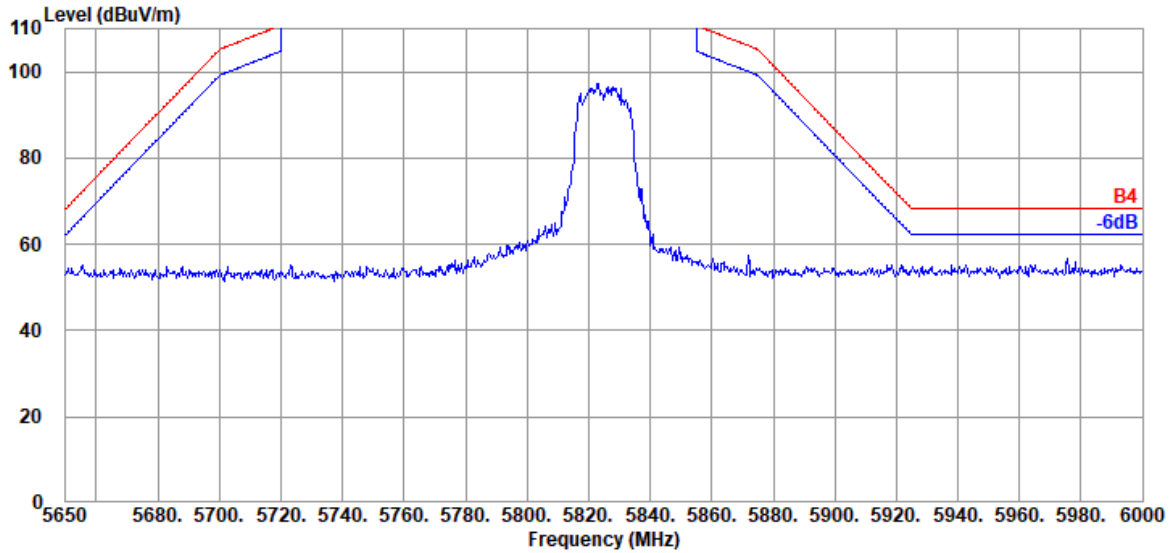

Antenna at Vertical Polarization

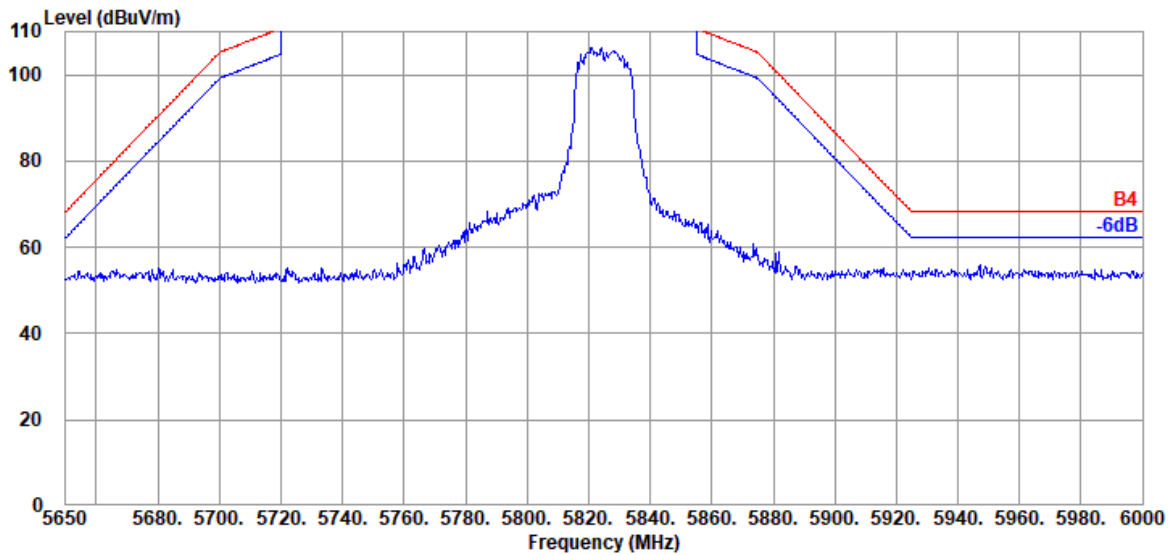


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

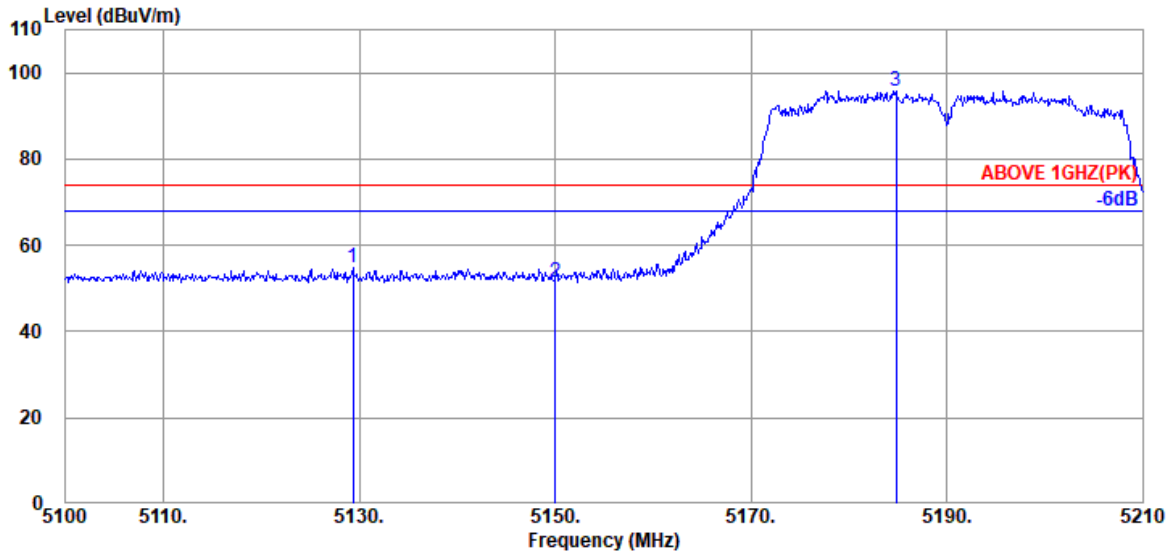

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.370	33.70	8.88	39.29	51.57	54.86	74.00	19.14	Peak
5150.050	33.70	8.88	39.29	48.22	51.51	74.00	22.49	Peak
@ 5184.810	33.70	8.90	39.28	92.53	95.85	---	---	Peak

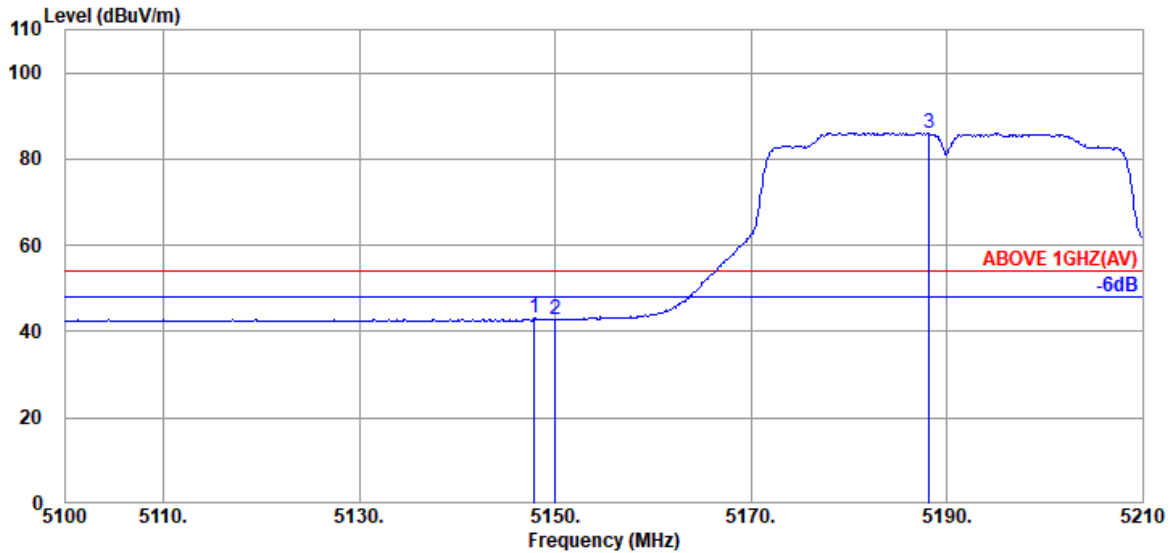


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	33.70	8.88	39.29	39.76	43.05	54.00	10.95	Average
5150.050	33.70	8.88	39.29	39.45	42.74	54.00	11.26	Average
@ 5188.220	33.70	8.91	39.28	82.75	86.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

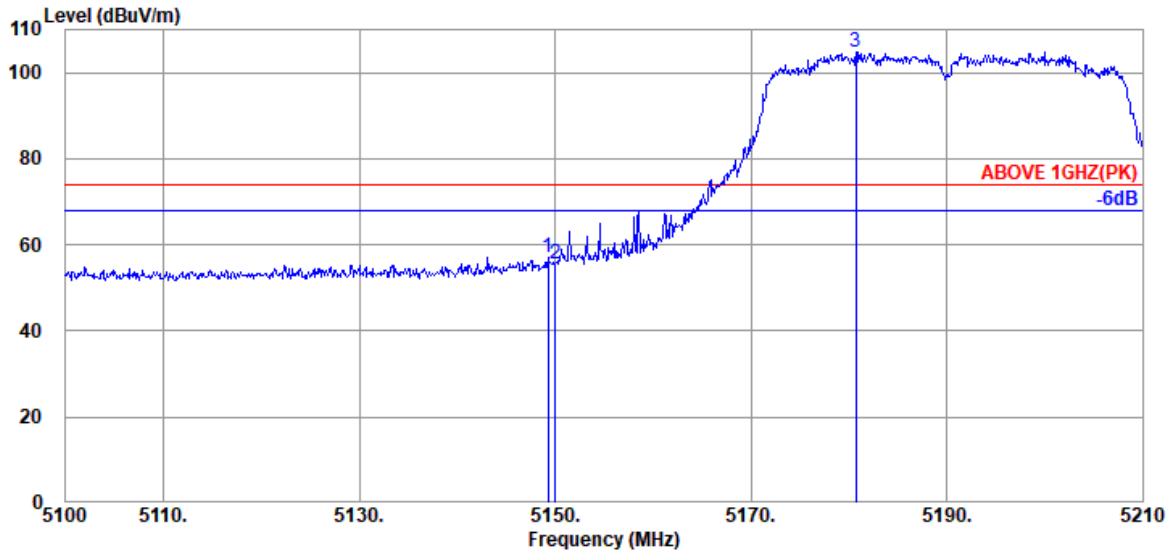

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	33.70	8.88	39.29	53.91	57.20	74.00	16.80	Peak
5150.050	33.70	8.88	39.29	52.44	55.73	74.00	18.27	Peak
@ 5180.740	33.70	8.90	39.28	101.37	104.69	---	---	Peak

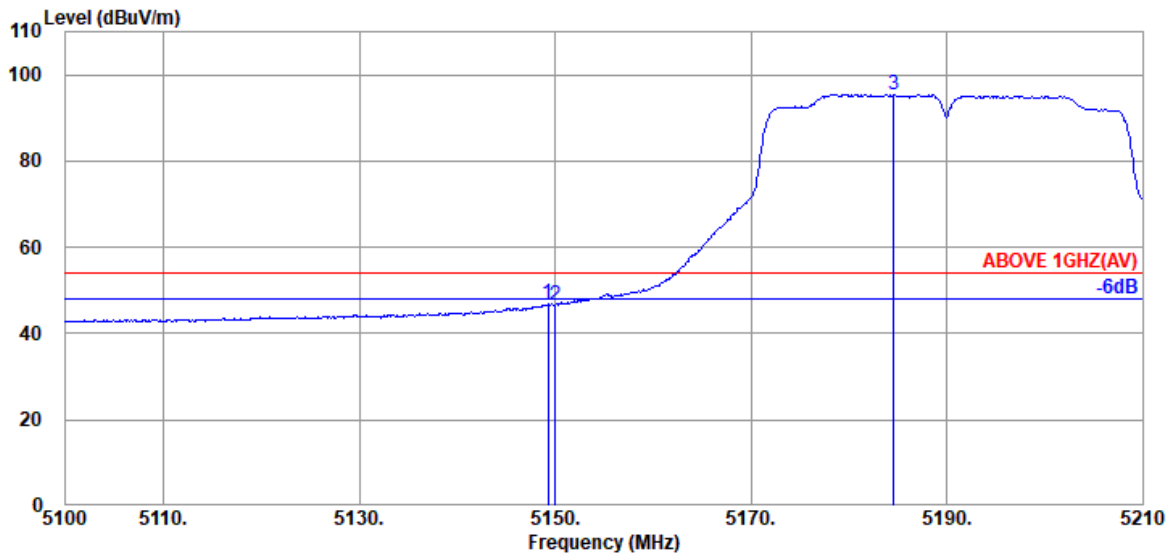


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	33.70	8.88	39.29	43.68	46.97	54.00	7.03	Average
5150.050	33.70	8.88	39.29	43.29	46.58	54.00	7.42	Average
@ 5184.590	33.70	8.90	39.28	92.19	95.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

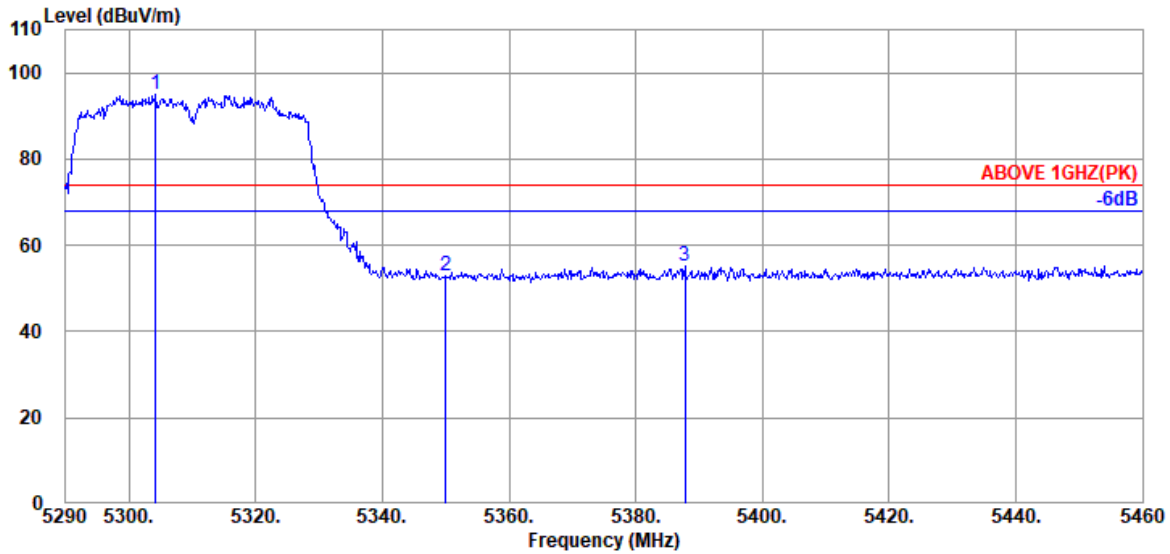

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.280	34.10	8.97	39.28	91.08	94.87	---	---	Peak
5350.010	33.90	8.99	39.27	49.41	53.03	74.00	20.97	Peak
5387.750	34.10	9.02	39.27	51.43	55.28	74.00	18.72	Peak

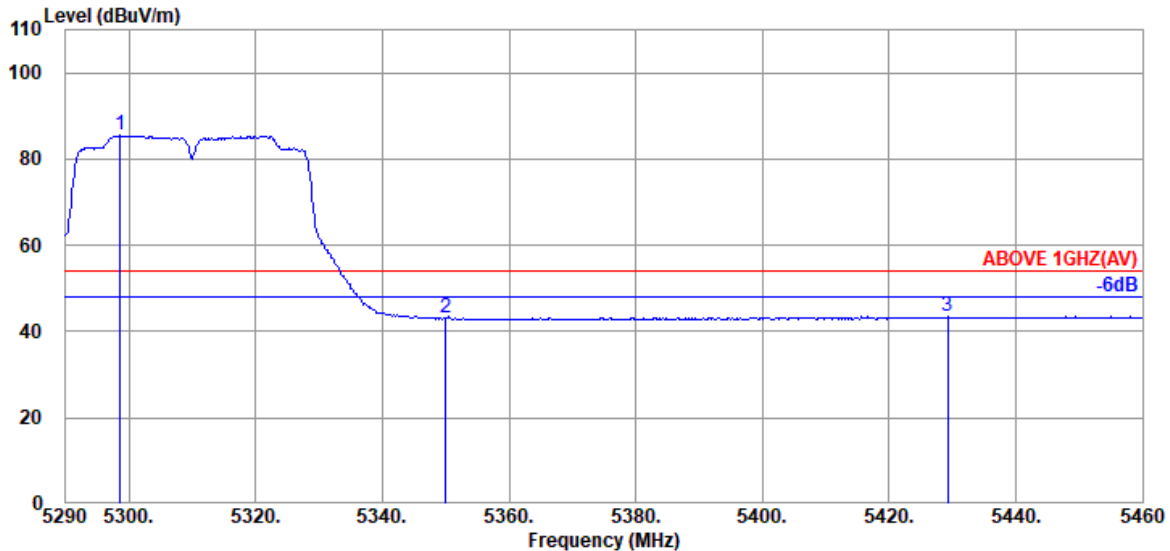


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.670	34.10	8.97	39.28	81.77	85.56	---	---	Average
5350.010	33.90	8.99	39.27	39.43	43.05	54.00	10.95	Average
5429.230	34.15	9.04	39.27	39.50	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

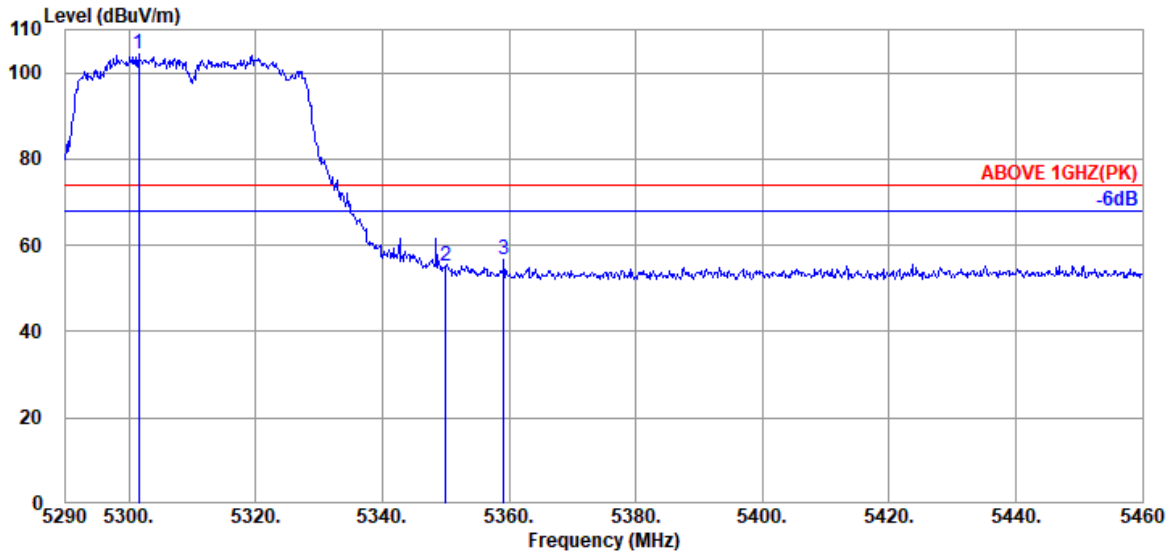

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5301.560	34.10	8.97	39.28	100.64	104.43	---	---	Peak
5350.010	33.90	8.99	39.27	51.60	55.22	74.00	18.78	Peak
5359.190	33.97	9.00	39.27	52.93	56.63	74.00	17.37	Peak

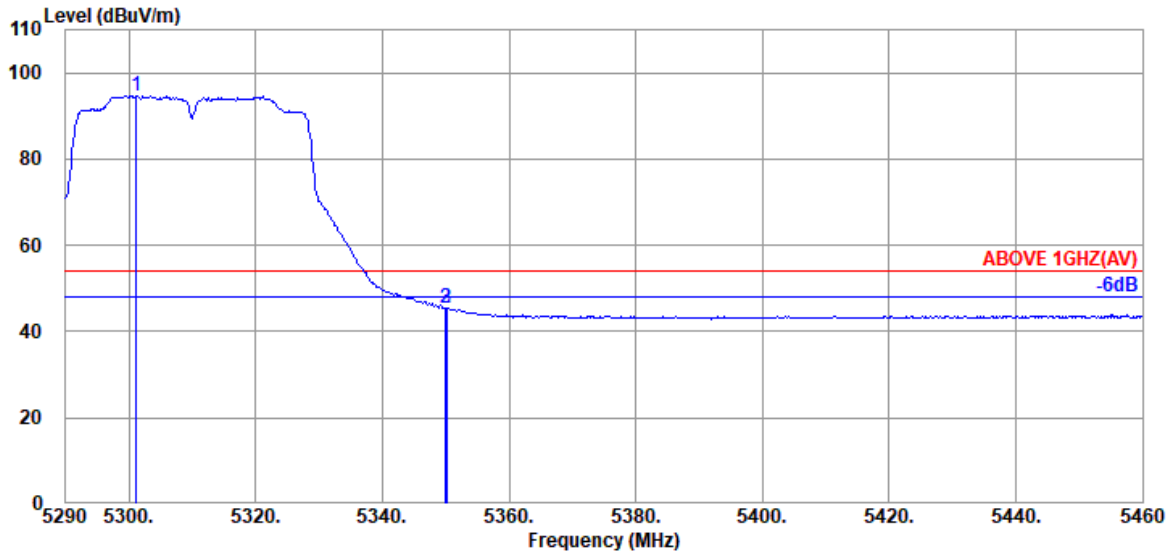


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5301.220	34.10	8.97	39.28	90.93	94.72	---	---	Average
5350.010	33.90	8.99	39.27	41.78	45.40	54.00	8.60	Average
5350.180	33.90	8.99	39.27	41.70	45.32	54.00	8.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

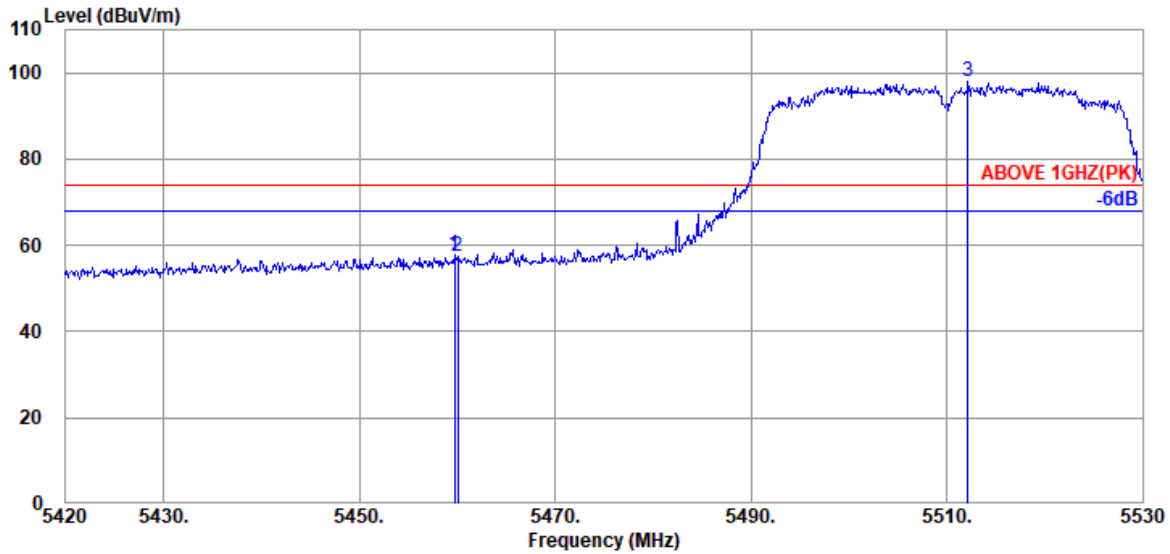

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.710	34.20	9.05	39.26	53.79	57.78	74.00	16.22	Peak
5460.040	34.20	9.05	39.26	53.42	57.41	74.00	16.59	Peak
@ 5512.180	34.10	9.09	39.26	93.99	97.92	---	---	Peak

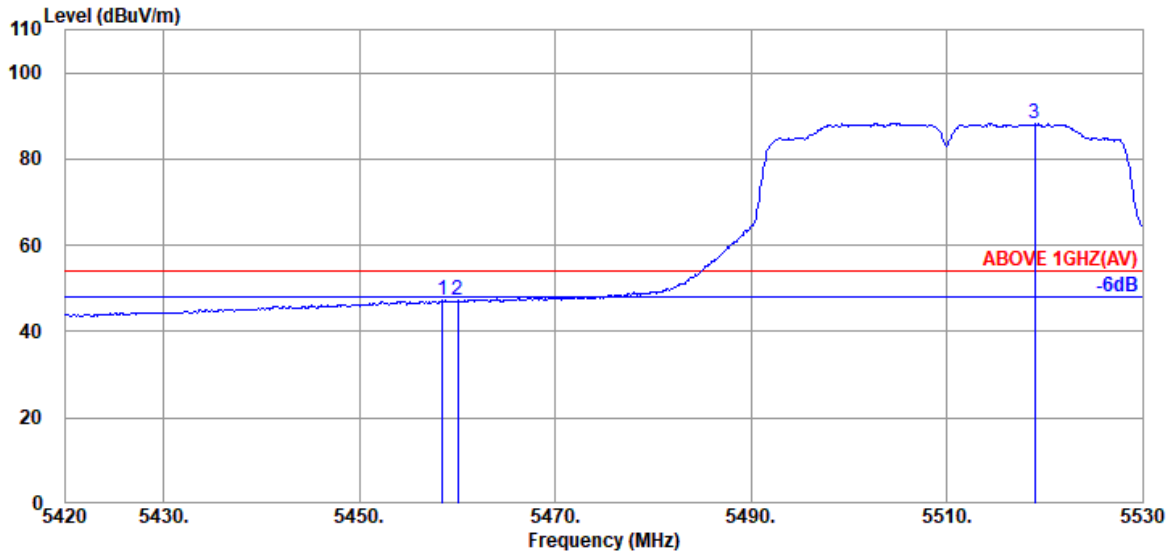


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.20	9.05	39.26	43.23	47.22	54.00	6.78	Average
5460.040	34.20	9.05	39.26	43.22	47.21	54.00	6.79	Average
@ 5519.000	34.10	9.09	39.26	84.36	88.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

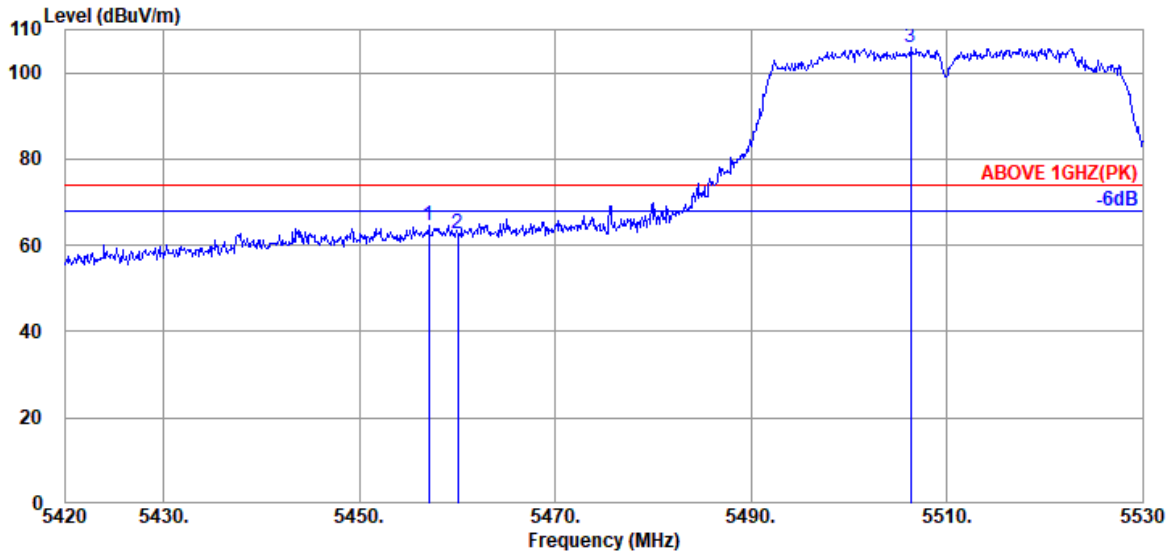

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.070	34.20	9.05	39.26	60.55	64.54	74.00	9.46	Peak
5460.040	34.20	9.05	39.26	58.87	62.86	74.00	11.14	Peak
@ 5506.350	34.10	9.08	39.26	102.01	105.93	---	---	Peak

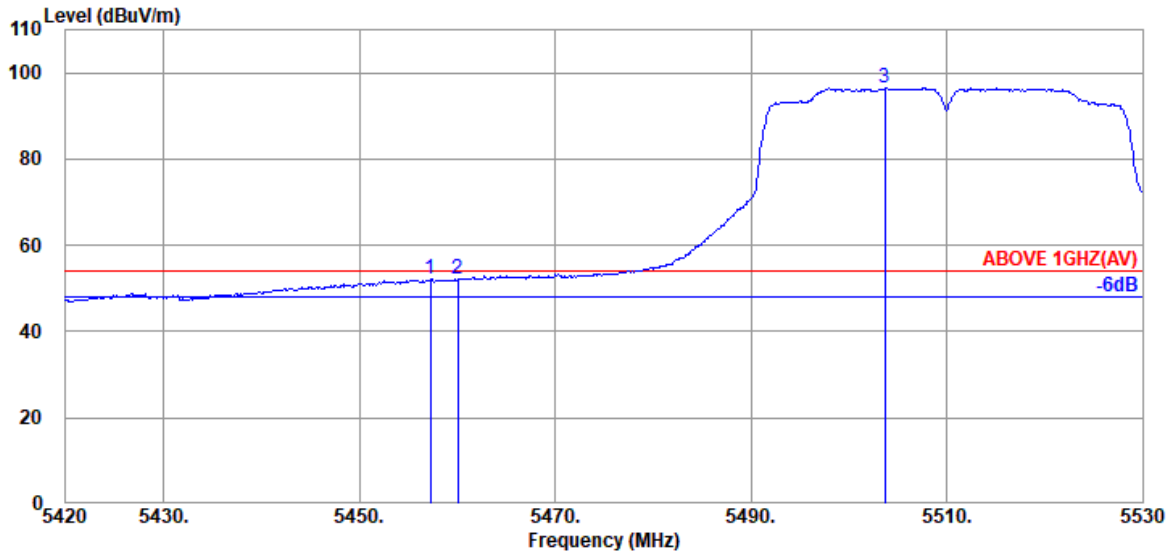


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.290	34.20	9.05	39.26	48.10	52.09	54.00	1.91	Average
5460.040	34.20	9.05	39.26	48.08	52.07	54.00	1.93	Average
@ 5503.710	34.10	9.08	39.26	92.63	96.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

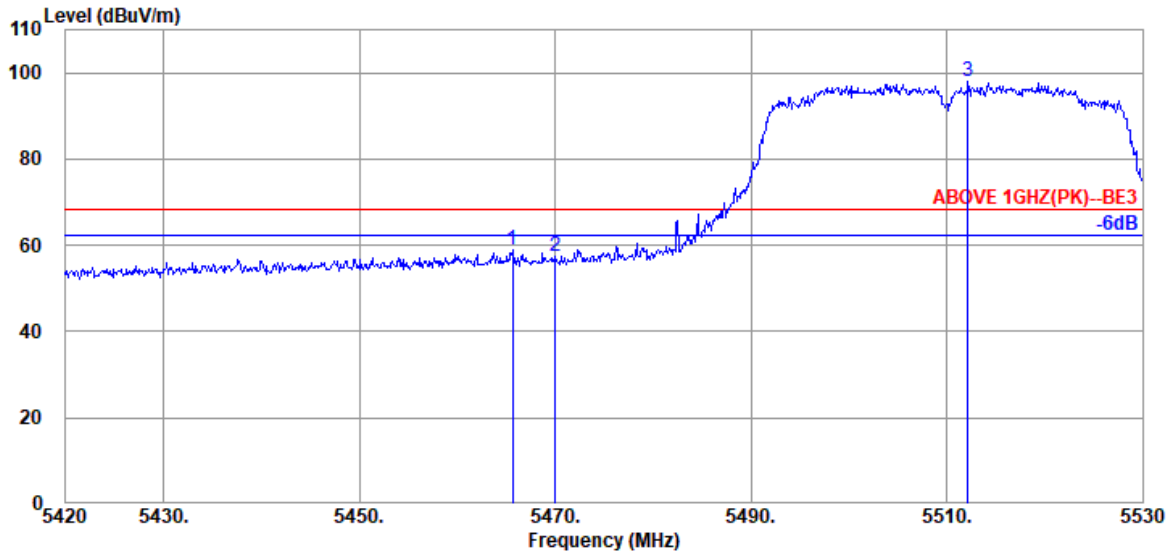

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.650	34.17	9.06	39.26	55.12	59.09	68.20	9.11	Peak
5470.050	34.17	9.06	39.26	53.37	57.34	68.20	10.86	Peak
@ 5512.180	34.10	9.09	39.26	93.99	97.92	---	---	Peak

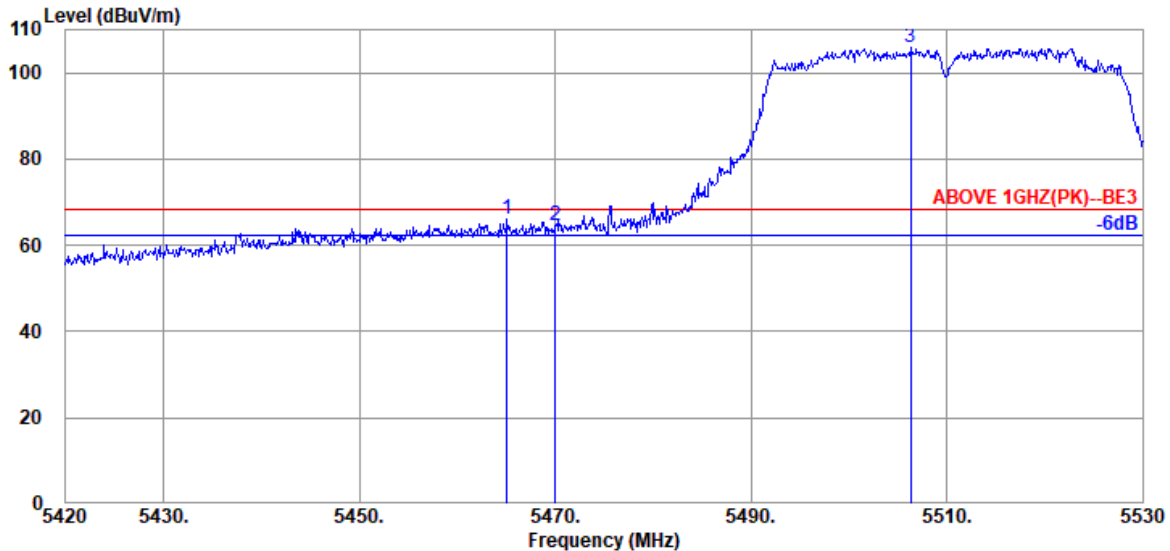


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.17	9.06	39.26	61.97	65.94	68.20	2.26	Peak
5470.050	34.17	9.06	39.26	60.44	64.41	68.20	3.79	Peak
@ 5506.350	34.10	9.08	39.26	102.01	105.93	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

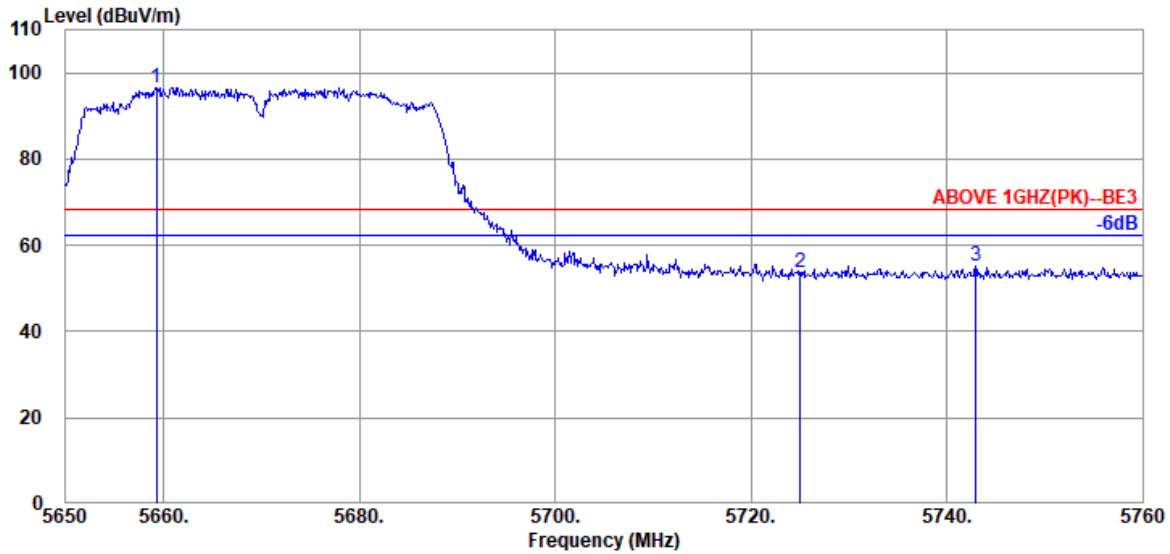

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.240	33.93	9.16	39.29	92.87	96.67	---	---	Peak
5725.020	33.80	9.20	39.30	49.87	53.57	68.20	14.63	Peak
5742.950	33.80	9.20	39.31	51.65	55.34	68.20	12.86	Peak

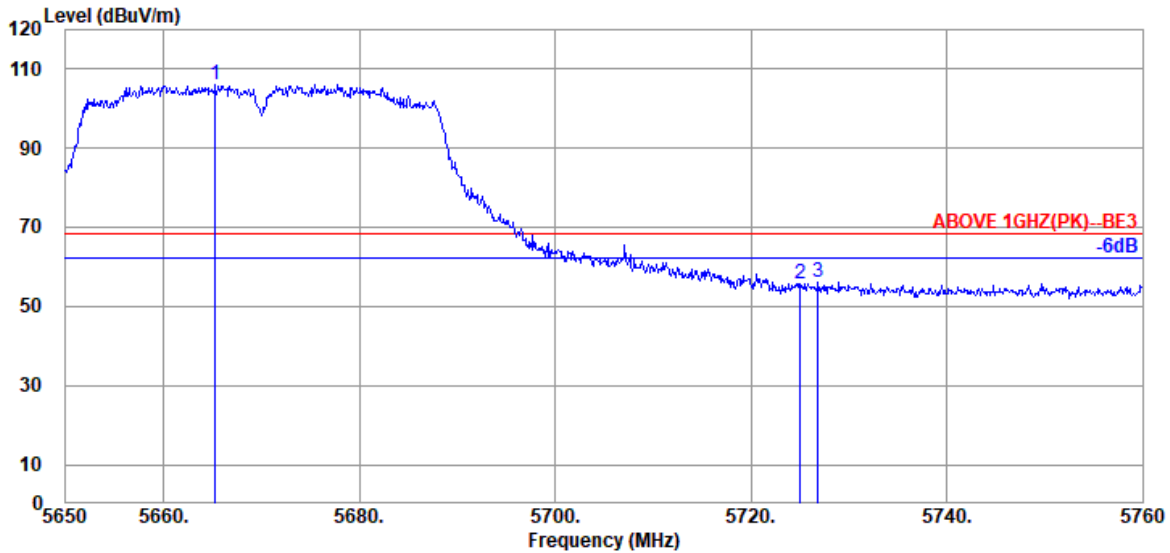


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.290	33.93	9.16	39.29	102.16	105.96	---	---	Peak
5725.020	33.80	9.20	39.30	51.98	55.68	68.20	12.52	Peak
5726.890	33.80	9.20	39.31	52.44	56.13	68.20	12.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

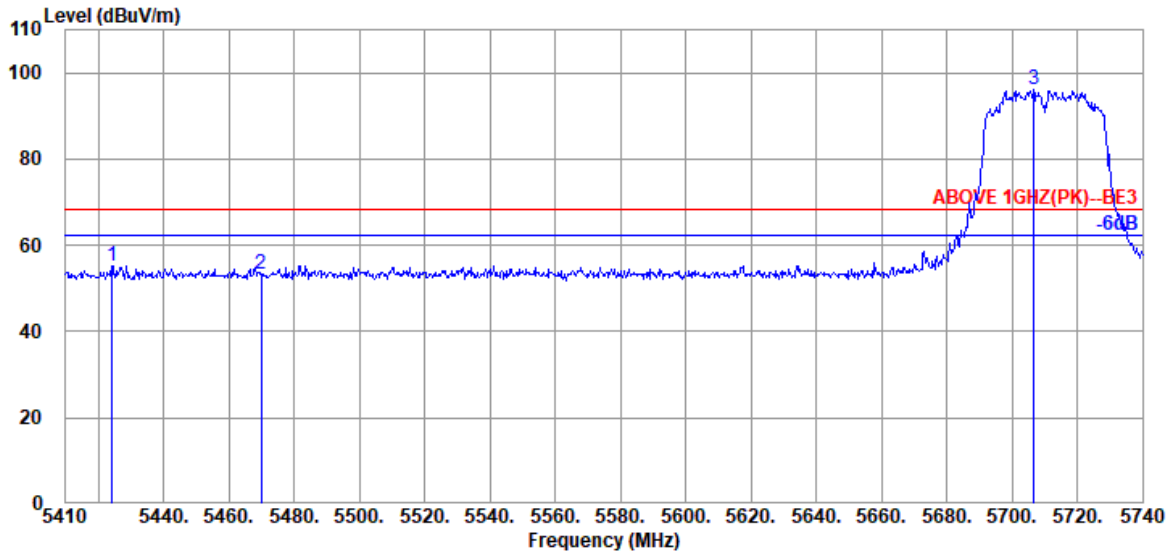

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5424.190	34.15	9.04	39.27	51.43	55.35	68.20	12.85	Peak
5470.060	34.17	9.06	39.26	49.47	53.44	68.20	14.76	Peak
5706.670	33.80	9.19	39.30	92.31	96.00	---	---	Peak

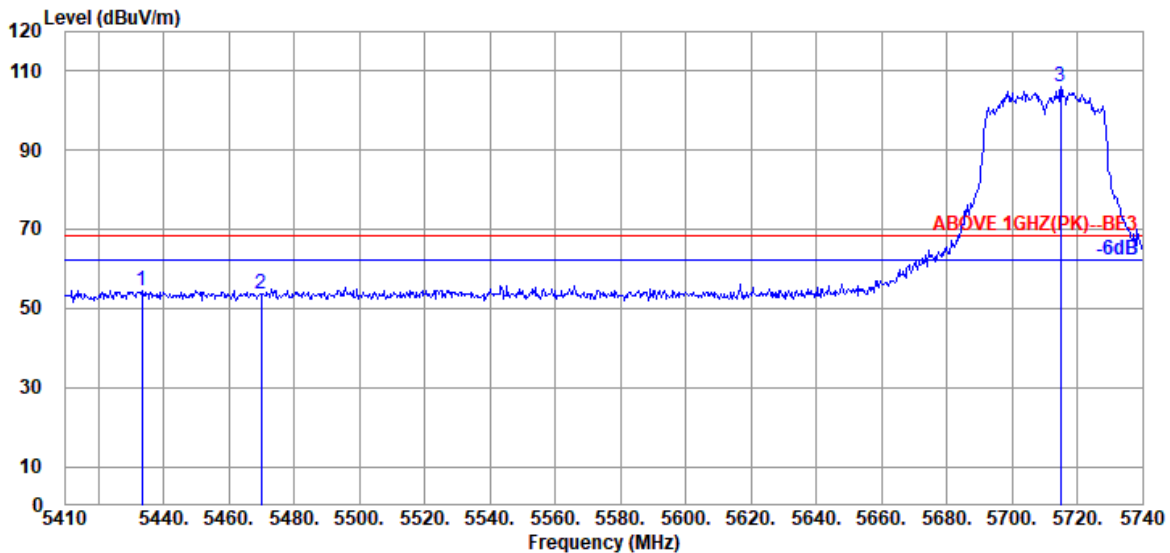


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5433.430	34.17	9.04	39.27	50.59	54.53	68.20	13.67	Peak
5470.060	34.17	9.06	39.26	49.67	53.64	68.20	14.56	Peak
5714.920	33.80	9.19	39.30	102.26	105.95	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

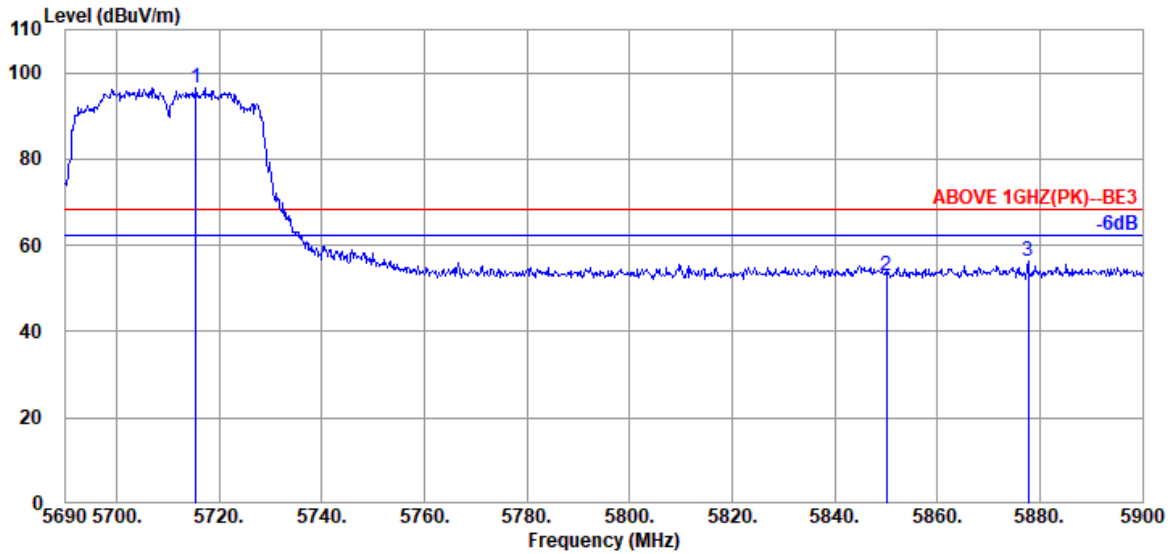

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.410	33.80	9.19	39.30	92.86	96.55	---	---	Peak
5850.020	34.10	9.25	39.33	48.98	53.00	68.20	15.20	Peak
5877.740	34.10	9.27	39.33	52.16	56.20	68.20	12.00	Peak

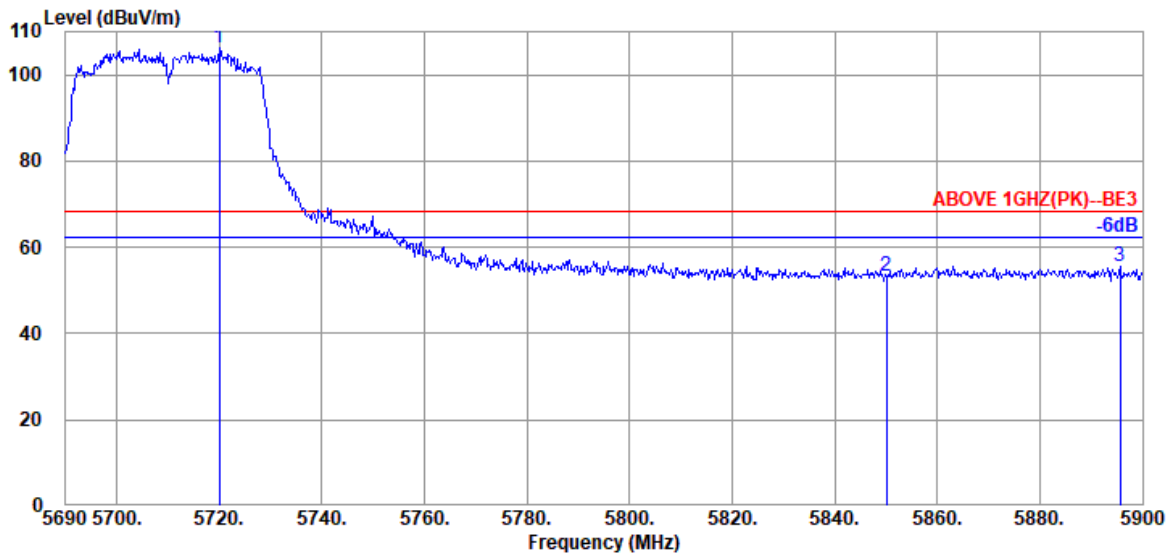


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.030	33.80	9.19	39.30	102.58	106.27	---	---	Peak
5850.020	34.10	9.25	39.33	49.30	53.32	68.20	14.88	Peak
5895.590	34.10	9.28	39.34	51.39	55.43	68.20	12.77	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

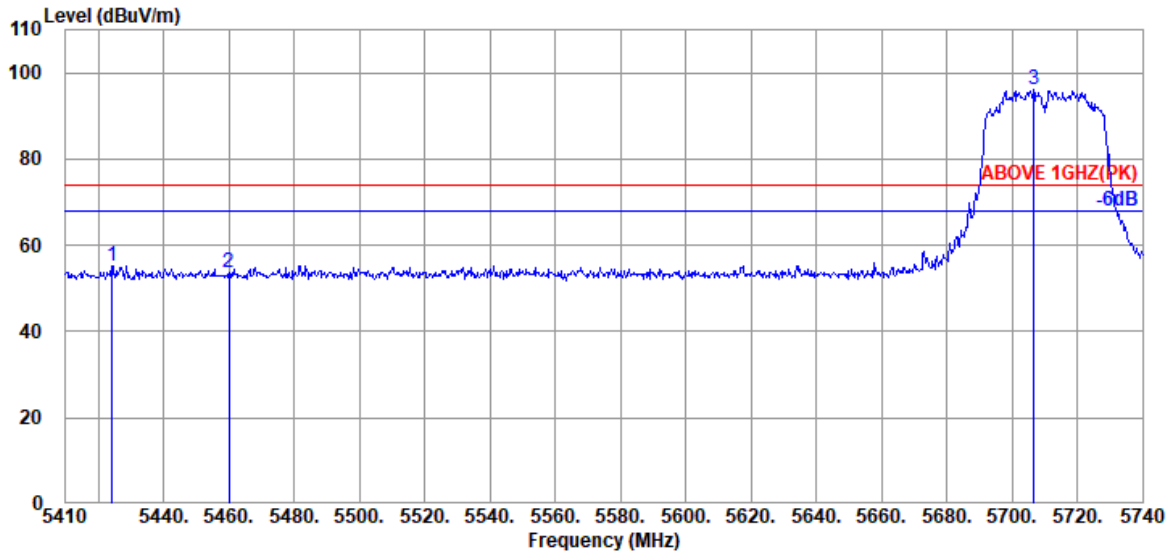

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.190	34.15	9.04	39.27	51.43	55.35	74.00	18.65	Peak
5460.160	34.20	9.05	39.26	49.57	53.56	74.00	20.44	Peak
@ 5706.670	33.80	9.19	39.30	92.31	96.00	---	---	Peak

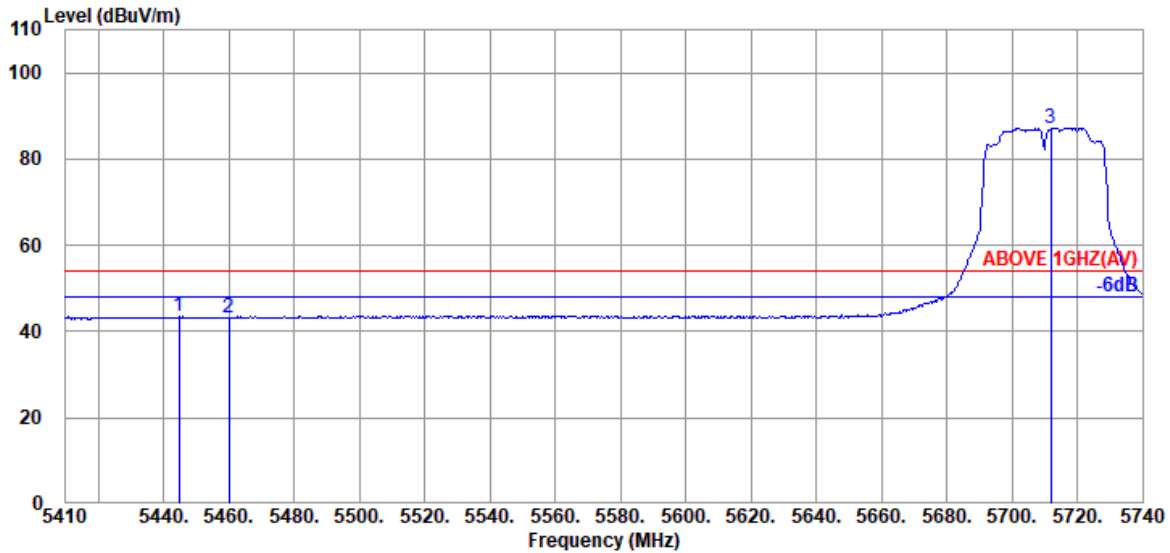


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.17	9.04	39.26	39.49	43.44	54.00	10.56	Average
5460.160	34.20	9.05	39.26	39.28	43.27	54.00	10.73	Average
@ 5711.950	33.80	9.19	39.30	83.57	87.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

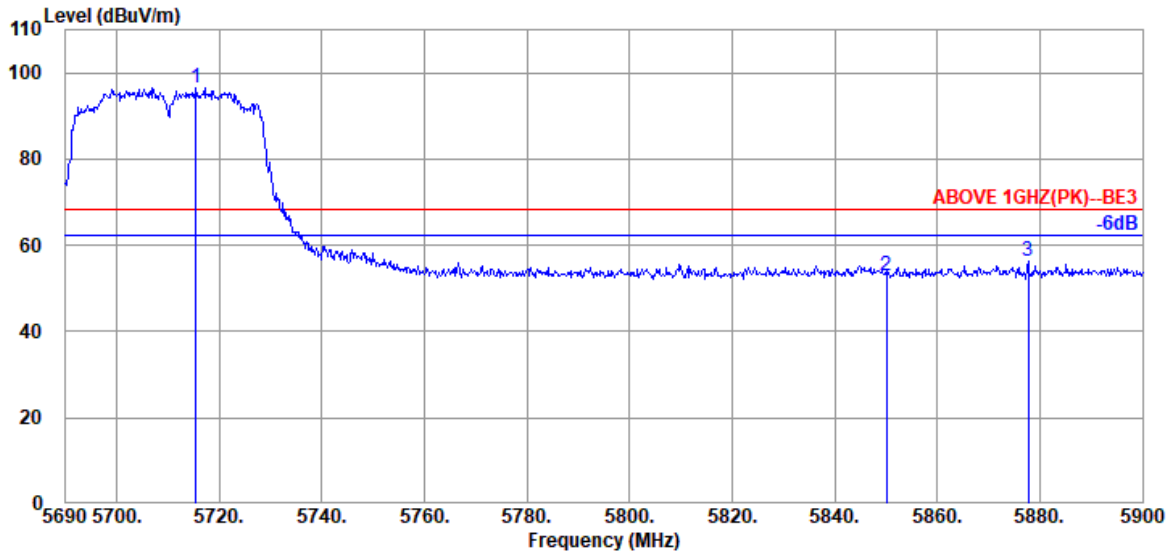

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.430	34.17	9.04	39.27	50.59	54.53	74.00	19.47	Peak
5460.160	34.20	9.05	39.26	49.10	53.09	74.00	20.91	Peak
@ 5714.920	33.80	9.19	39.30	102.26	105.95	---	---	Peak

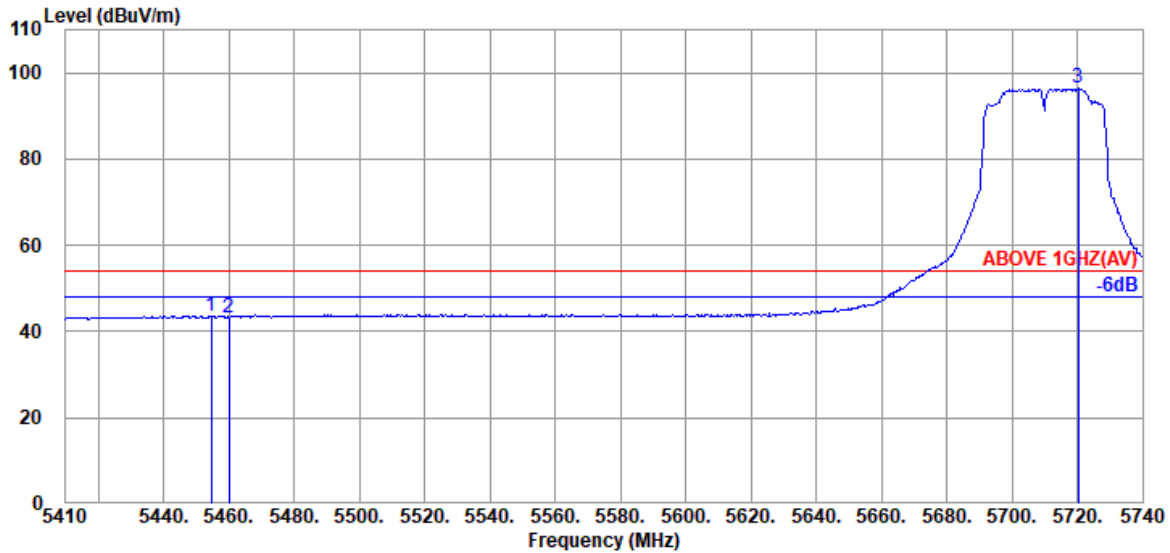


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.550	34.20	9.05	39.26	39.65	43.64	54.00	10.36	Average
5460.160	34.20	9.05	39.26	39.33	43.32	54.00	10.68	Average
@ 5720.200	33.80	9.19	39.30	92.73	96.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

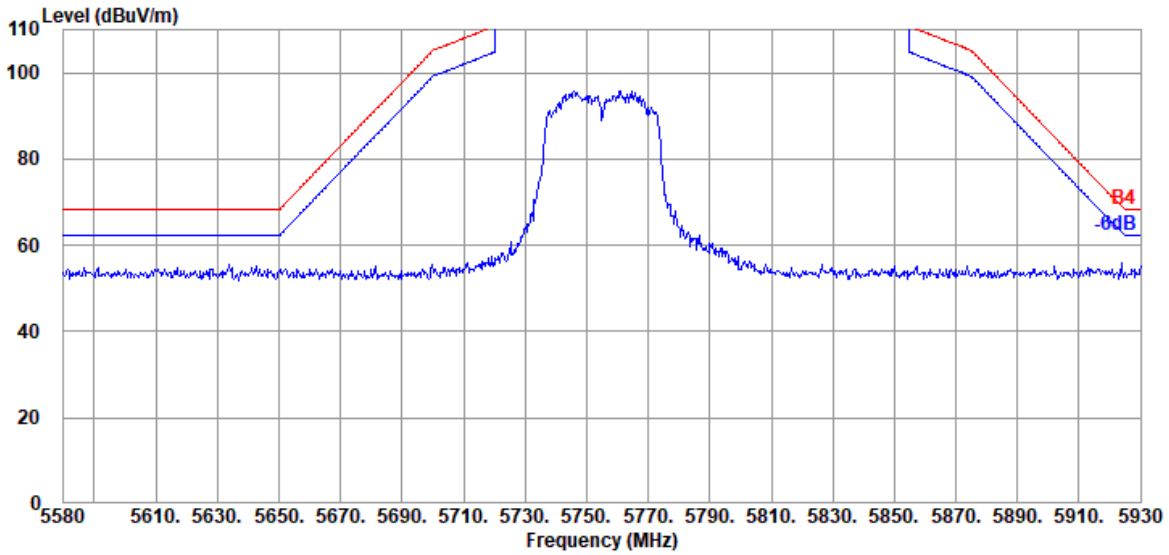


Antenna at Vertical Polarization

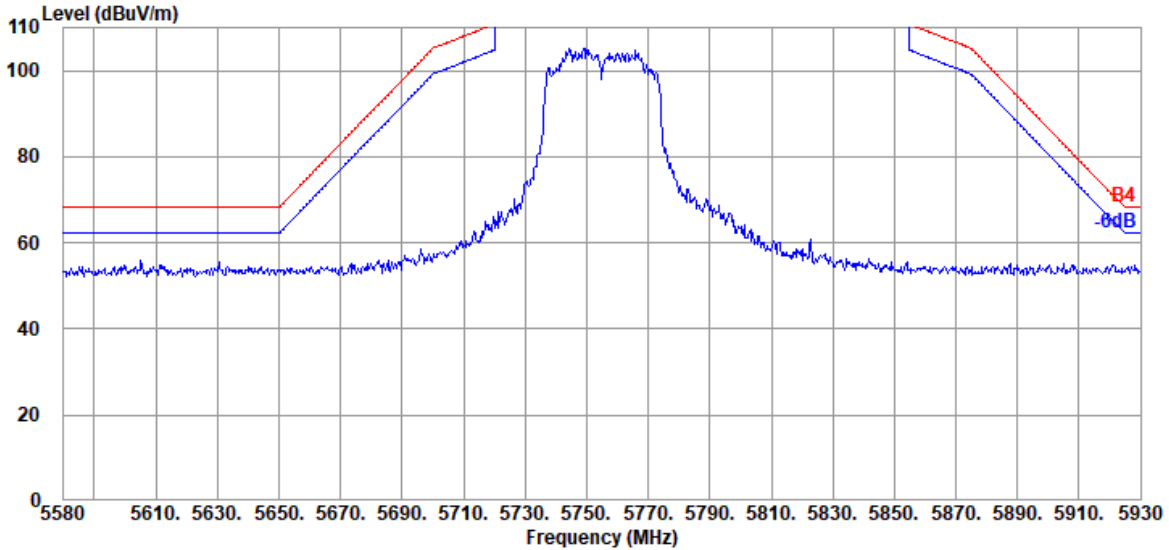


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

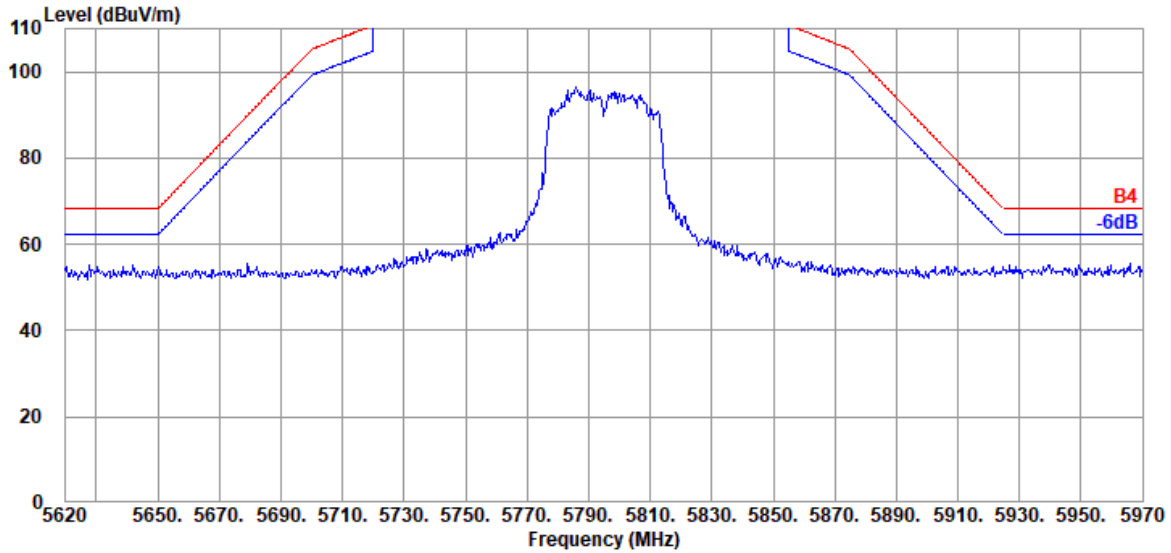

Antenna at Vertical Polarization

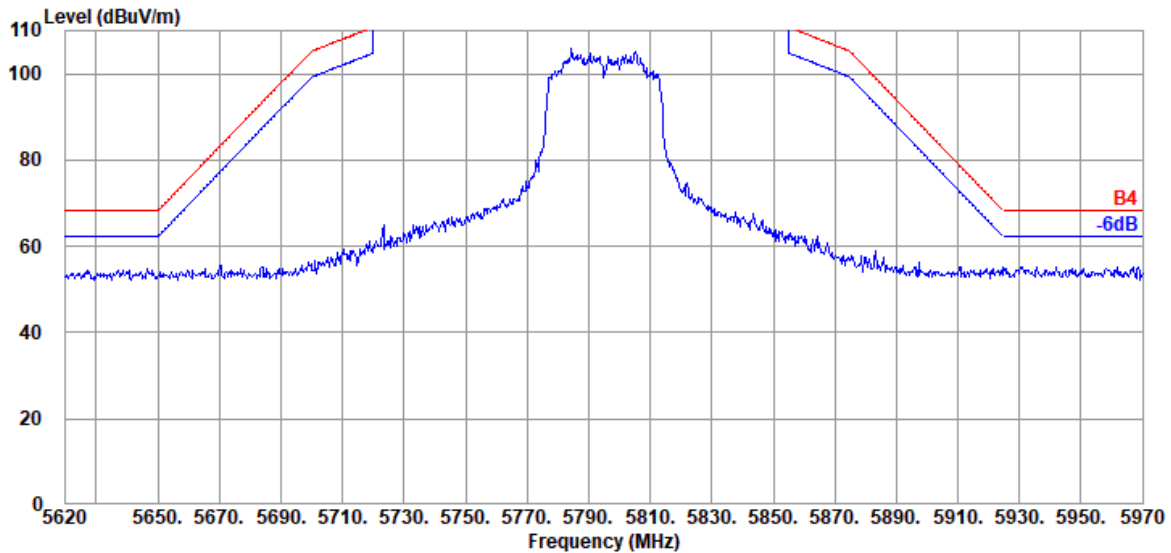


Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

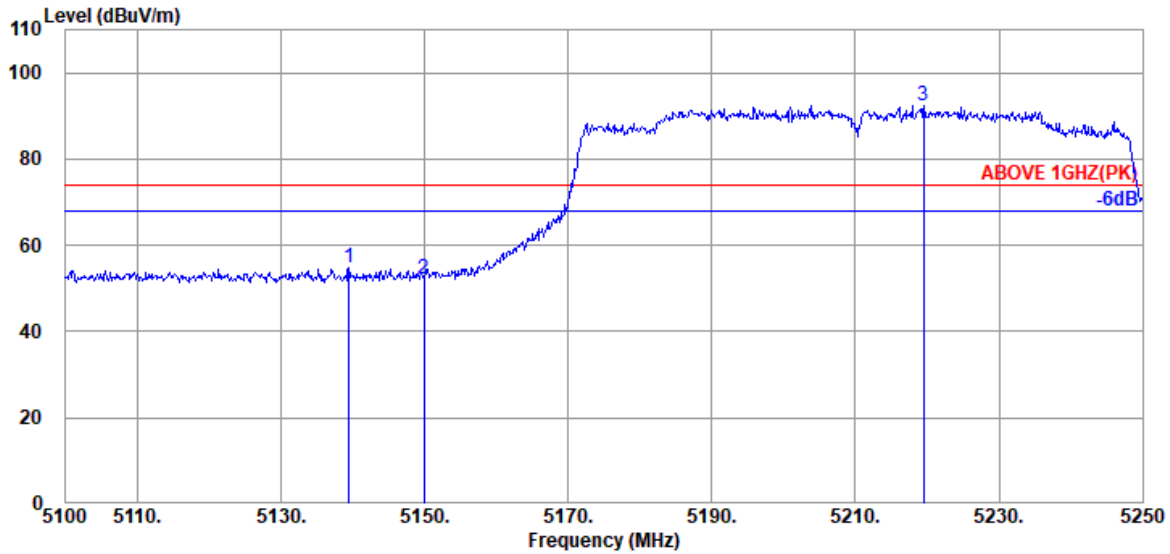

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.450	33.70	8.88	39.29	51.40	54.69	74.00	19.31	Peak
5149.950	33.70	8.88	39.29	49.00	52.29	74.00	21.71	Peak
@ 5219.550	33.75	8.93	39.28	89.06	92.46	---	---	Peak

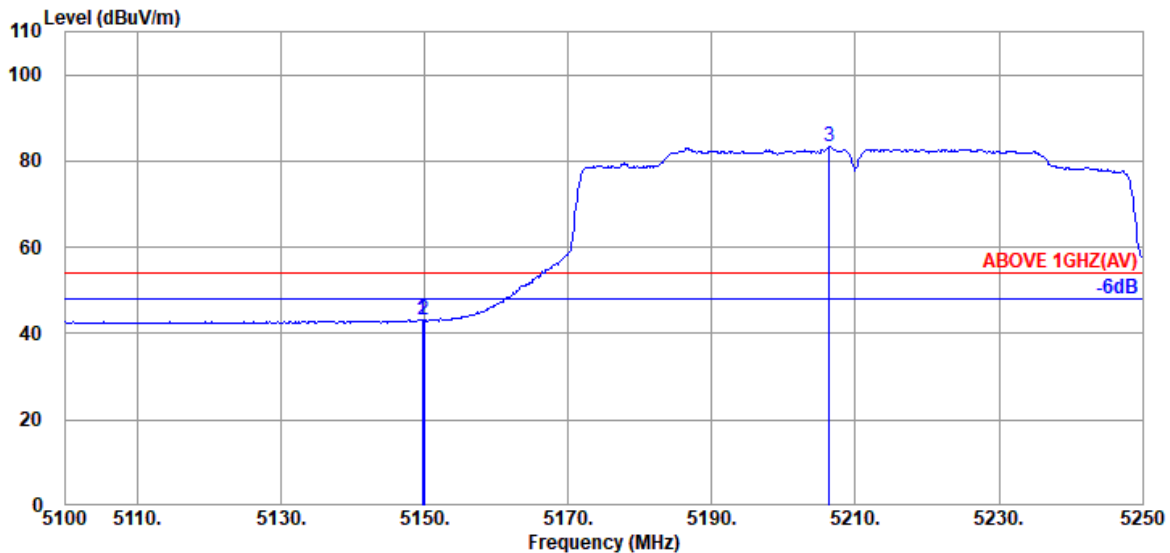


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	39.84	43.13	54.00	10.87	Average
5149.950	33.70	8.88	39.29	39.95	43.24	54.00	10.76	Average
@ 5206.350	33.72	8.92	39.28	79.86	83.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

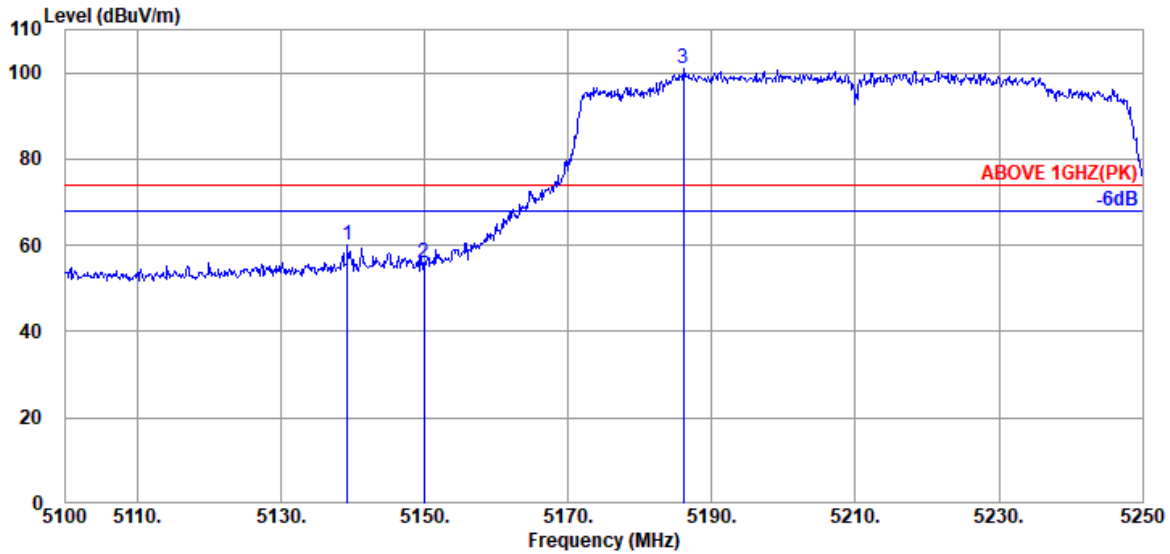

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.300	33.70	8.88	39.29	56.76	60.05	74.00	13.95	Peak
5149.950	33.70	8.88	39.29	52.76	56.05	74.00	17.95	Peak
@ 5186.100	33.70	8.90	39.28	97.64	100.96	---	---	Peak

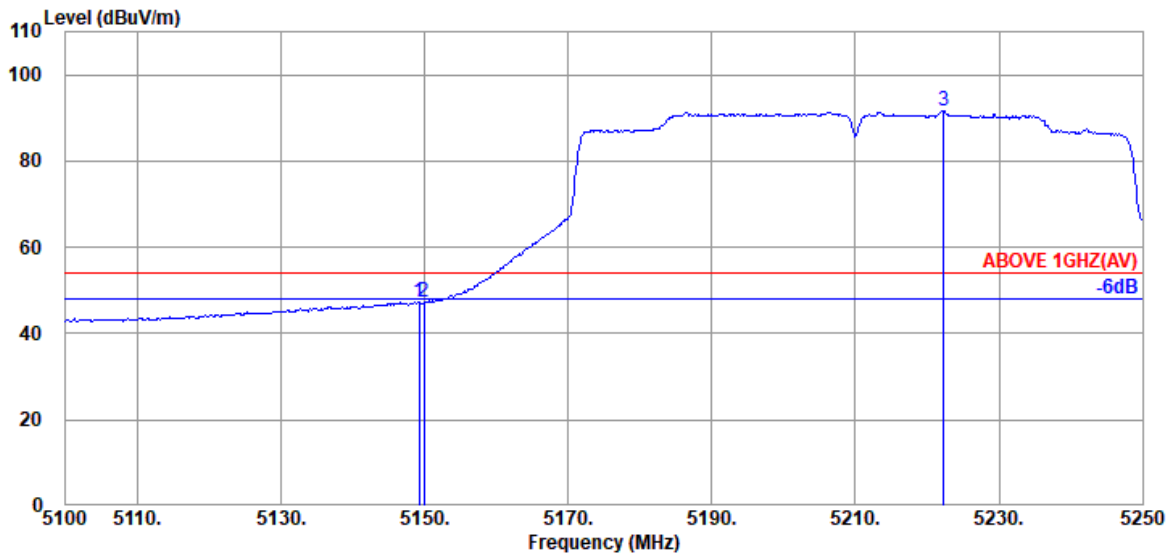


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.88	39.29	43.90	47.19	54.00	6.81	Average
5149.950	33.70	8.88	39.29	43.84	47.13	54.00	6.87	Average
@ 5222.250	33.75	8.93	39.28	88.10	91.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

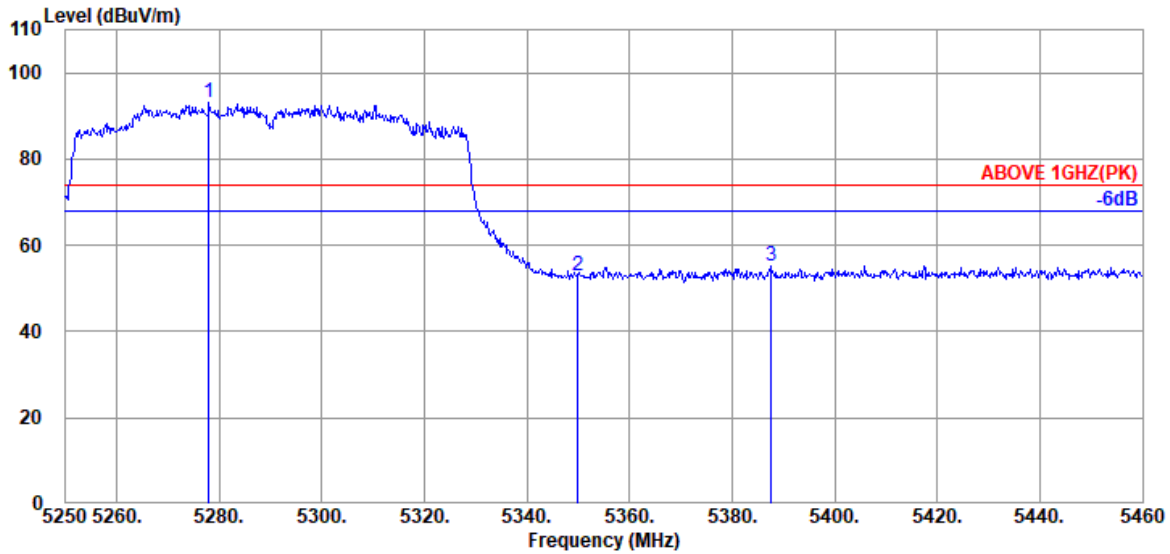

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.930	34.00	8.96	39.28	89.34	93.02	---	---	Peak
5349.960	33.90	8.99	39.27	49.47	53.09	74.00	20.91	Peak
5387.550	34.10	9.02	39.27	51.46	55.31	74.00	18.69	Peak

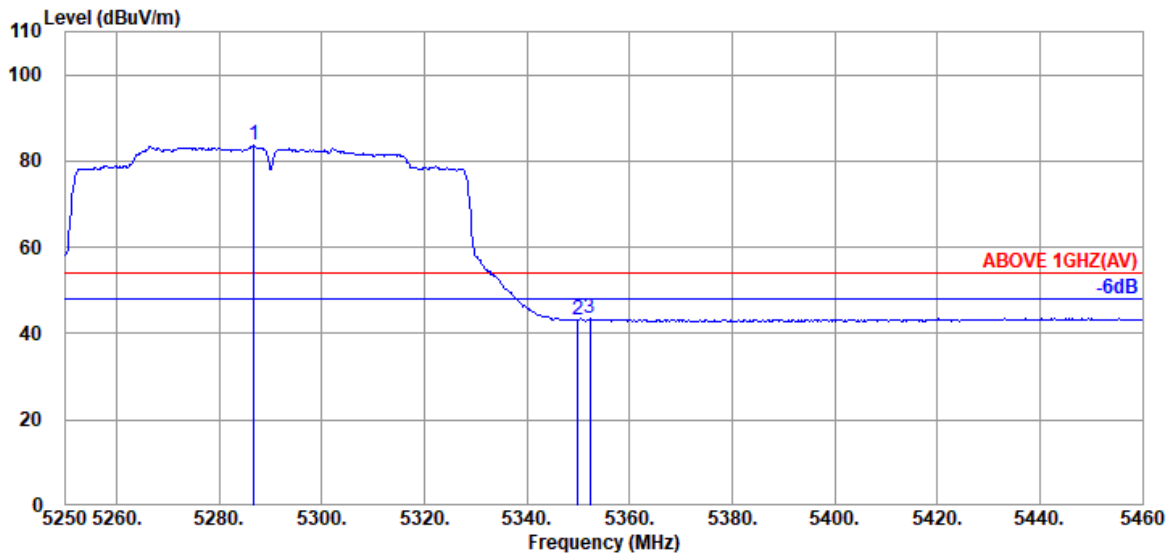


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.750	34.00	8.96	39.28	80.08	83.76	---	---	Average
5349.960	33.90	8.99	39.27	39.62	43.24	54.00	10.76	Average
5352.270	33.90	8.99	39.27	39.86	43.48	54.00	10.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

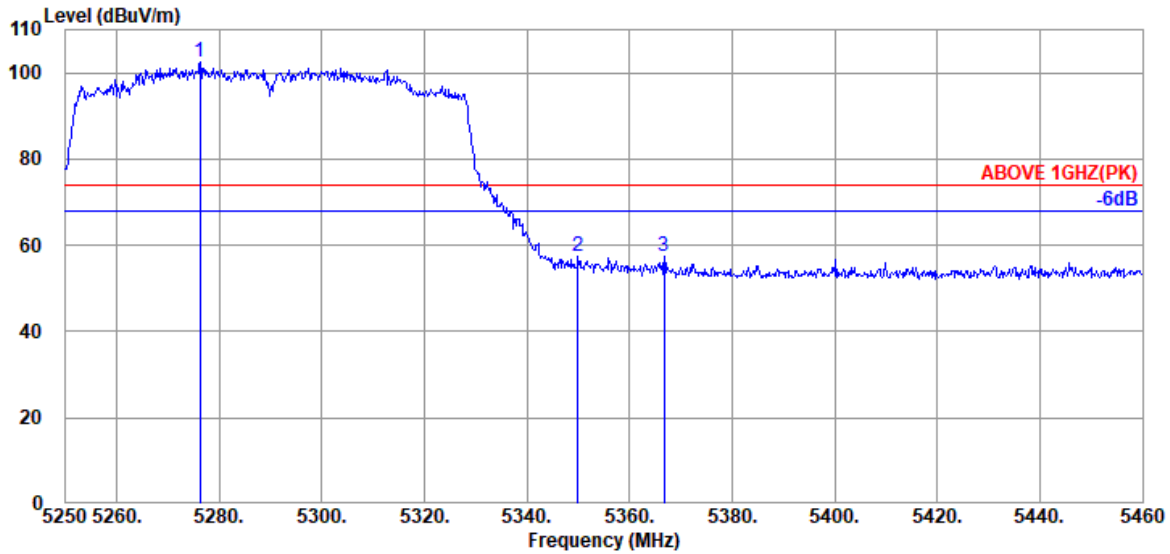

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.250	33.90	8.95	39.28	99.04	102.61	---	---	Peak
5349.960	33.90	8.99	39.27	53.68	57.30	74.00	16.70	Peak
5366.760	33.97	9.00	39.27	53.63	57.33	74.00	16.67	Peak

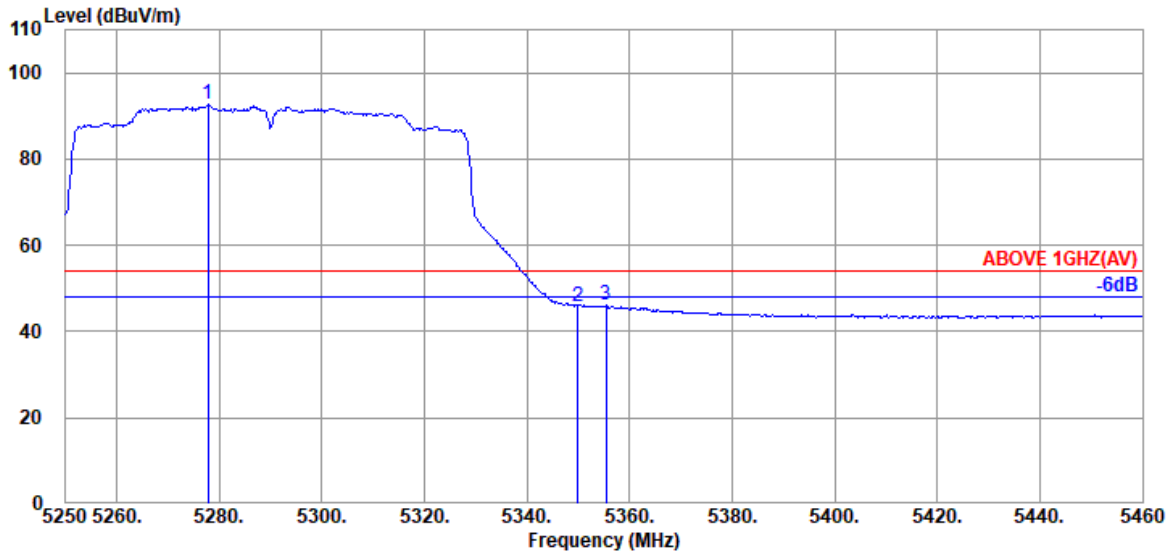


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.720	34.00	8.96	39.28	88.87	92.55	---	---	Average
5349.960	33.90	8.99	39.27	42.36	45.98	54.00	8.02	Average
5355.420	33.97	9.00	39.27	42.45	46.15	54.00	7.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

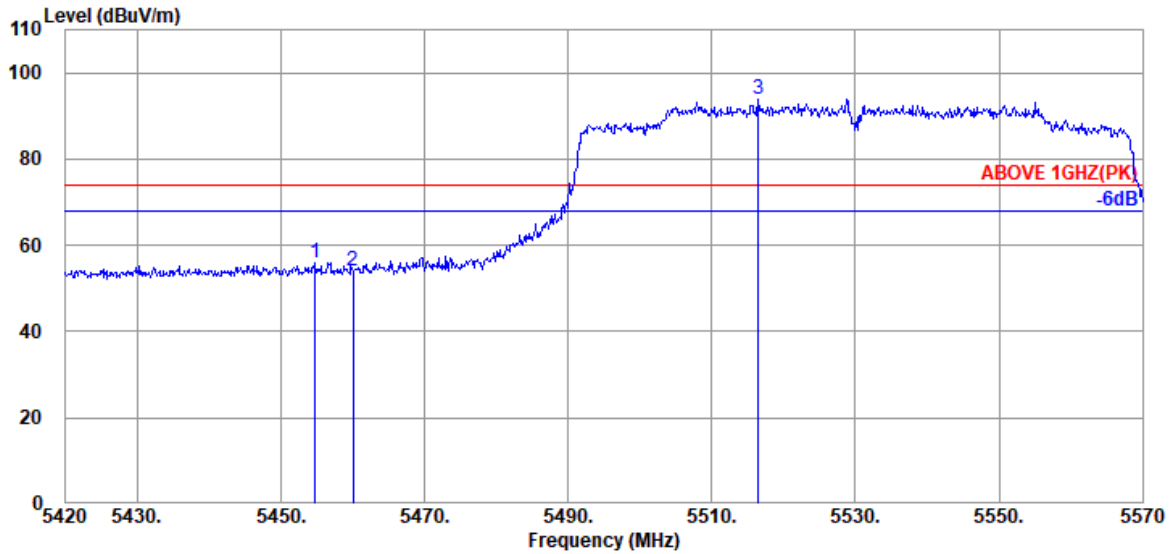

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.800	34.20	9.05	39.26	52.03	56.02	74.00	17.98	Peak
5460.050	34.20	9.05	39.26	50.00	53.99	74.00	20.01	Peak
@ 5516.450	34.10	9.09	39.26	90.04	93.97	---	---	Peak

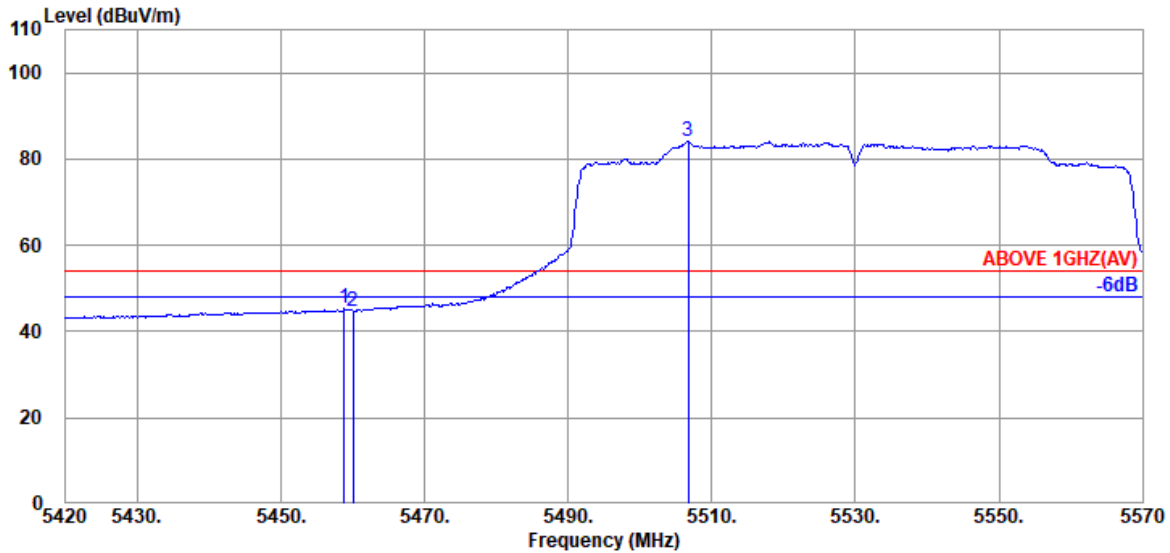


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.850	34.20	9.05	39.26	41.31	45.30	54.00	8.70	Average
5460.050	34.20	9.05	39.26	40.81	44.80	54.00	9.20	Average
@ 5506.700	34.10	9.08	39.26	80.12	84.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

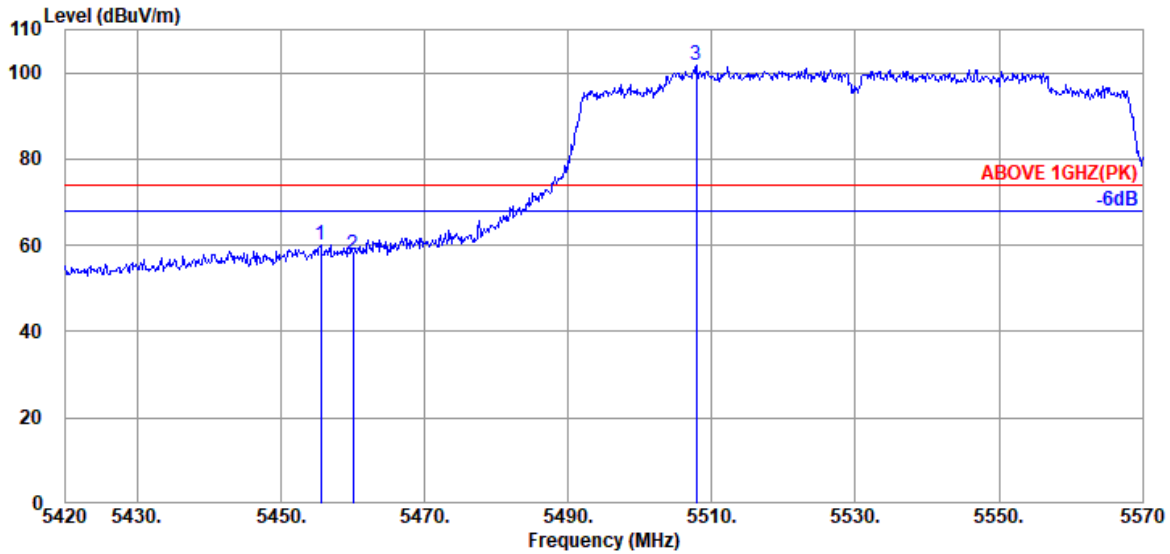

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.550	34.20	9.05	39.26	56.12	60.11	74.00	13.89	Peak
5460.050	34.20	9.05	39.26	54.00	57.99	74.00	16.01	Peak
@ 5507.900	34.10	9.08	39.26	97.73	101.65	---	---	Peak

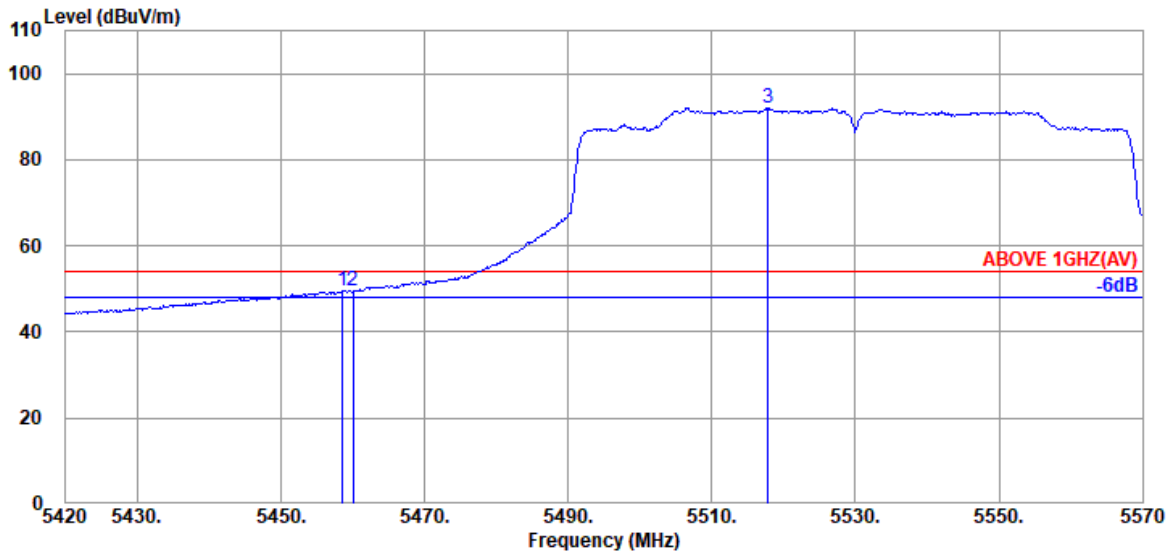


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.550	34.20	9.05	39.26	45.46	49.45	54.00	4.55	Average
5460.050	34.20	9.05	39.26	45.73	49.72	54.00	4.28	Average
@ 5517.800	34.10	9.09	39.26	88.05	91.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

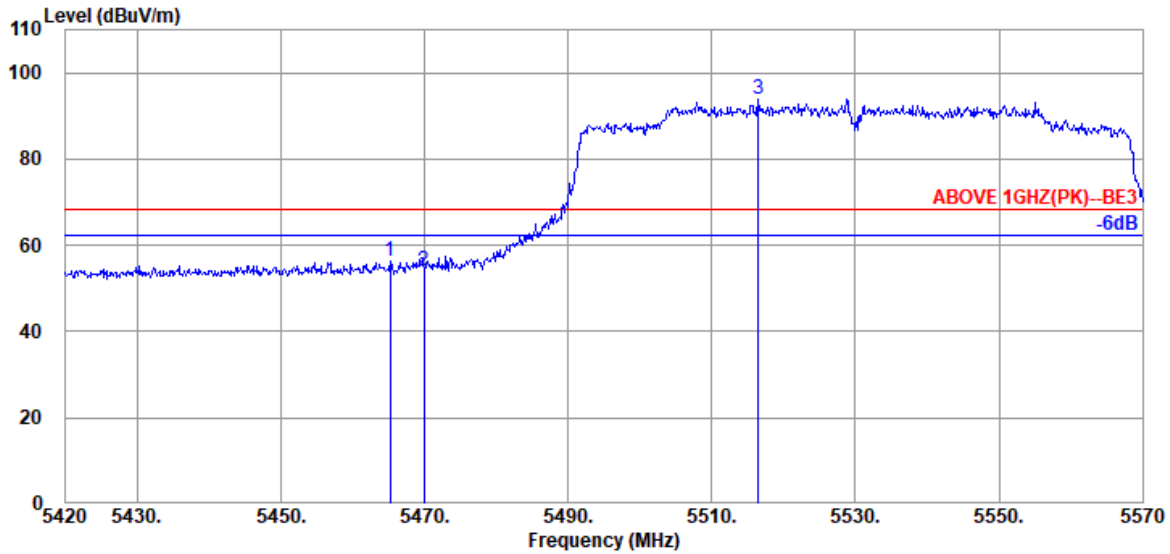

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.150	34.17	9.06	39.26	52.35	56.32	68.20	11.88	Peak
5469.950	34.17	9.06	39.26	50.11	54.08	68.20	14.12	Peak
@ 5516.450	34.10	9.09	39.26	90.04	93.97	---	---	Peak

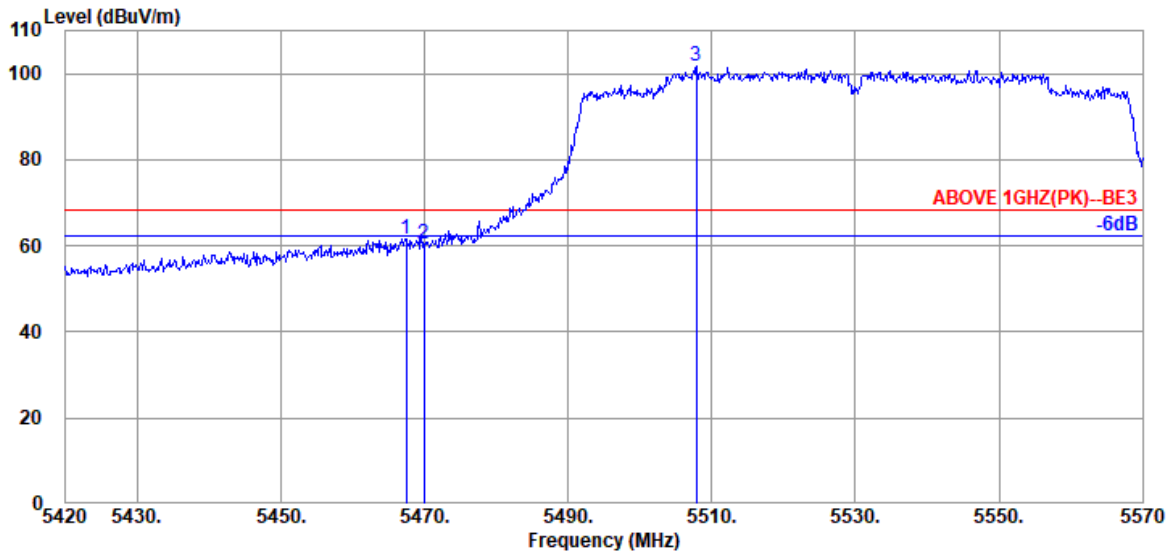


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	9.06	39.26	57.73	61.70	68.20	6.50	Peak
5469.950	34.17	9.06	39.26	56.61	60.58	68.20	7.62	Peak
@ 5507.900	34.10	9.08	39.26	97.73	101.65	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

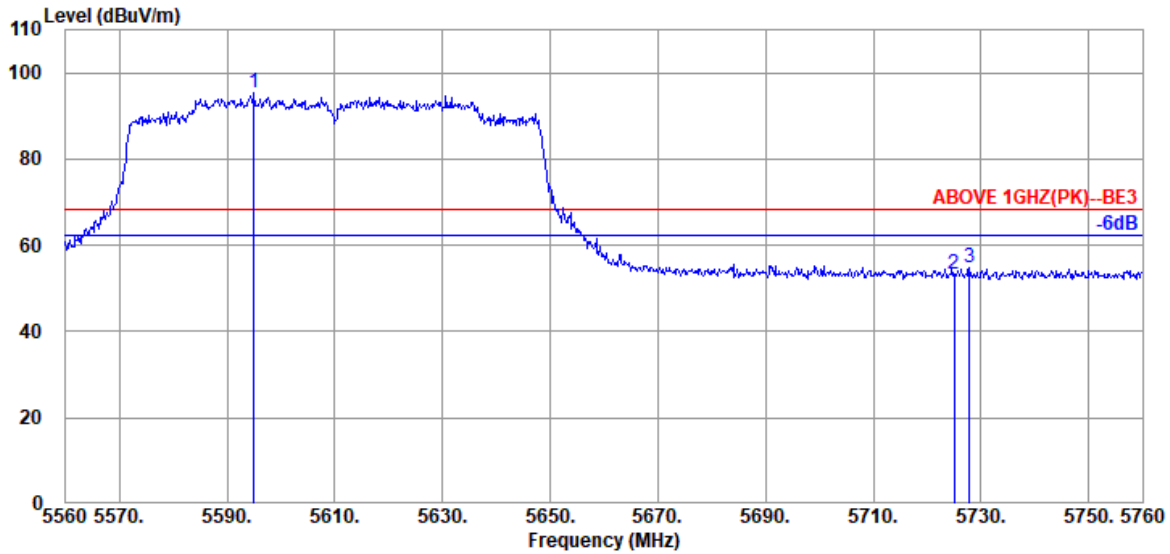

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.000	34.00	9.13	39.28	91.59	95.44	---	---	Peak
5725.000	33.80	9.20	39.30	49.71	53.41	68.20	14.79	Peak
5727.800	33.80	9.20	39.31	51.27	54.96	68.20	13.24	Peak

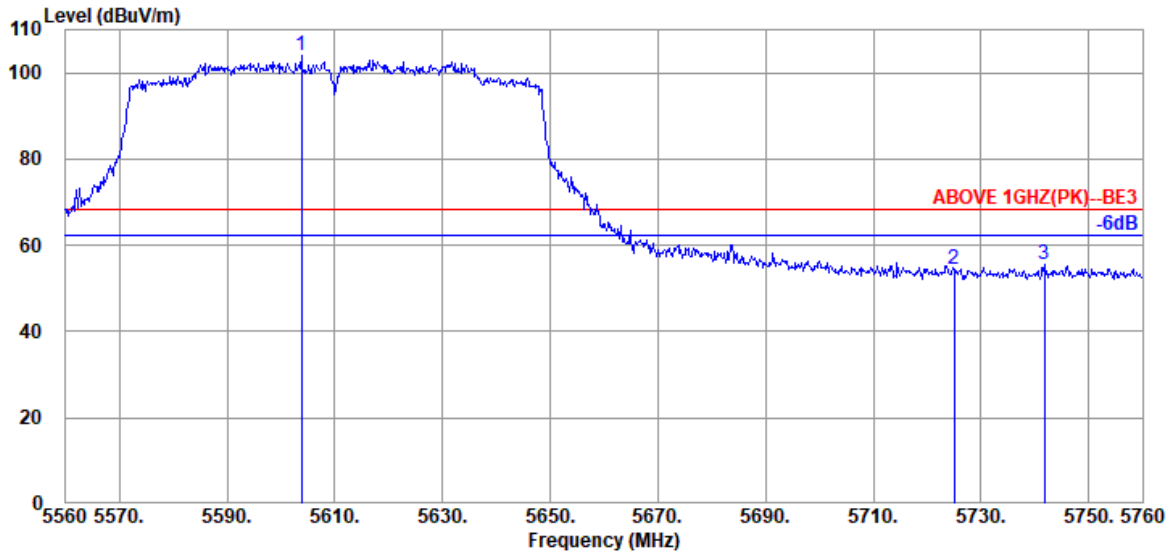


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5603.800	34.00	9.13	39.28	100.13	103.98	---	---	Peak
5725.000	33.80	9.20	39.30	50.78	54.48	68.20	13.72	Peak
5741.800	33.80	9.20	39.31	51.82	55.51	68.20	12.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

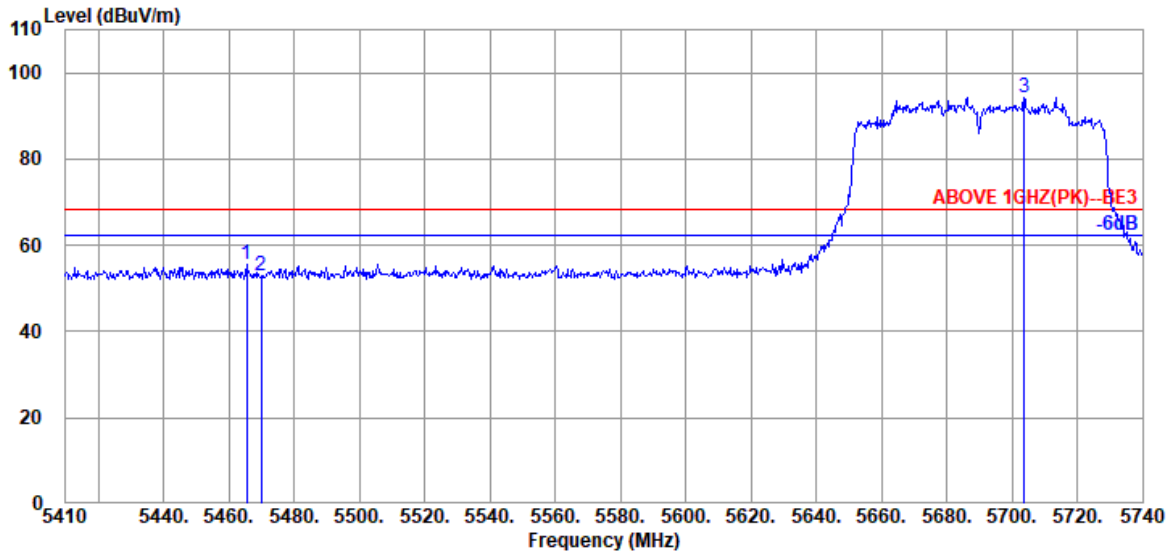

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5465.440	34.17	9.06	39.26	51.45	55.42	68.20	12.78	Peak
	5470.060	34.17	9.06	39.26	49.11	53.08	68.20	15.12	Peak
	5703.700	33.80	9.18	39.30	90.58	94.26	---	---	Peak

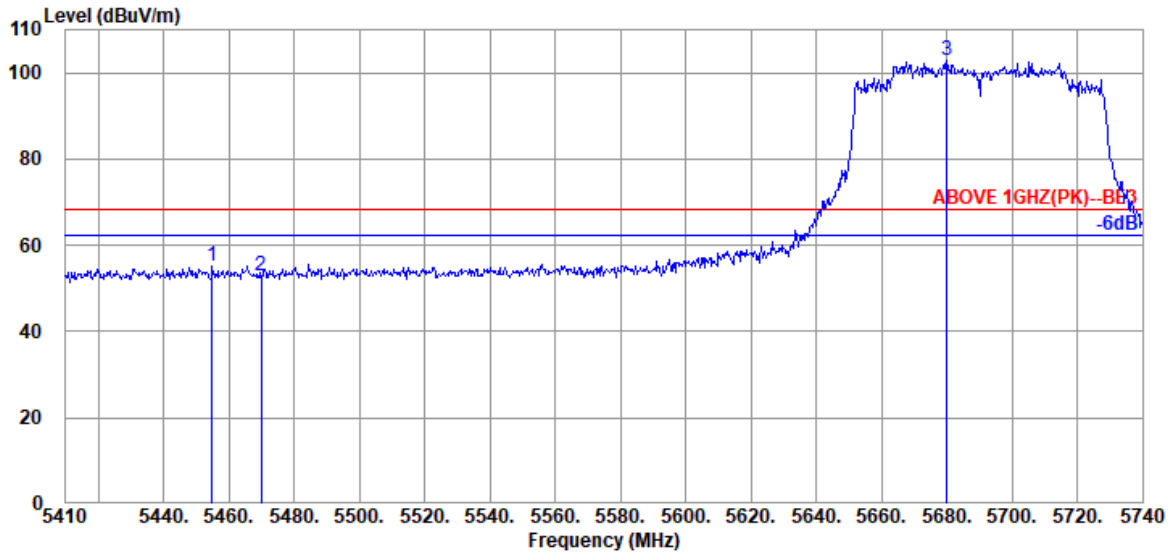


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5454.880	34.20	9.05	39.26	51.30	55.29	68.20	12.91	Peak
	5470.060	34.17	9.06	39.26	49.12	53.09	68.20	15.11	Peak
	5679.940	33.87	9.17	39.30	99.24	102.98	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

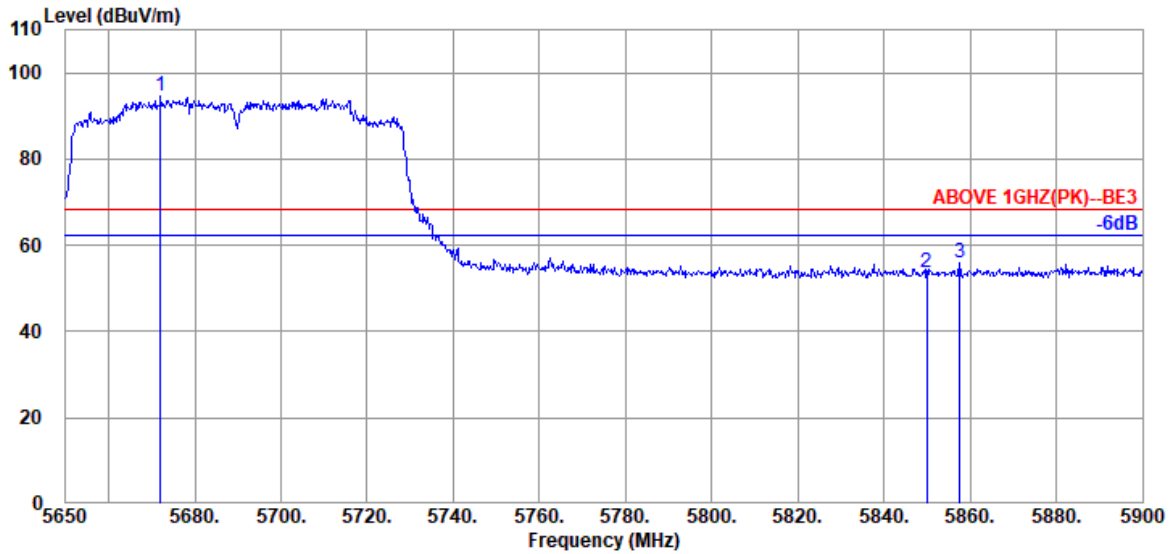

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.000	33.93	9.16	39.30	90.76	94.55	---	---	Peak
5850.000	34.10	9.25	39.33	49.70	53.72	68.20	14.48	Peak
5857.500	34.10	9.26	39.33	51.83	55.86	68.20	12.34	Peak

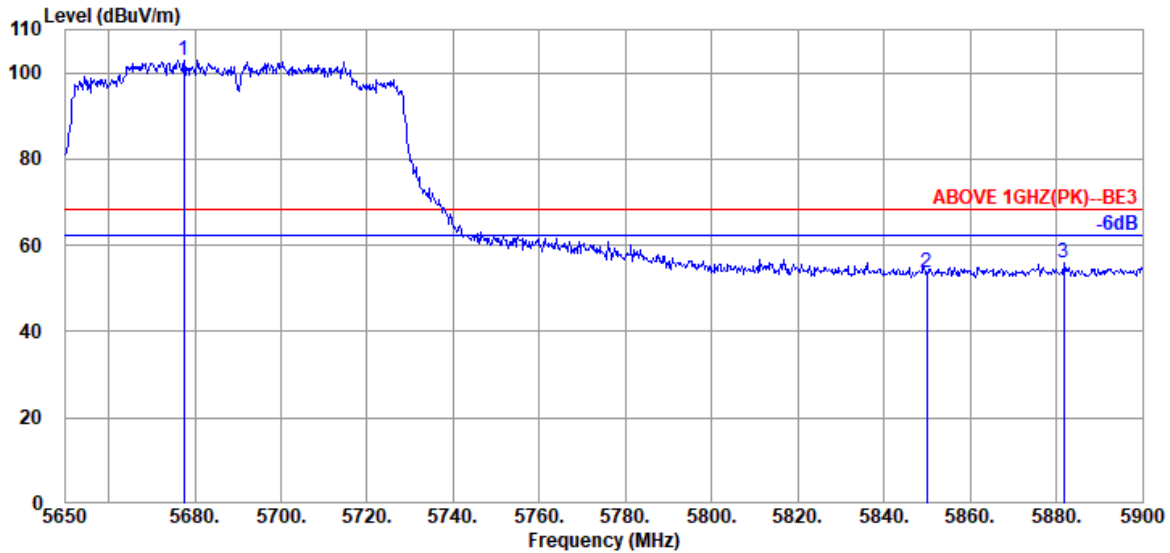


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.500	33.87	9.17	39.30	99.13	102.87	---	---	Peak
5850.000	34.10	9.25	39.33	49.82	53.84	68.20	14.36	Peak
5881.750	34.10	9.27	39.34	51.76	55.79	68.20	12.41	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

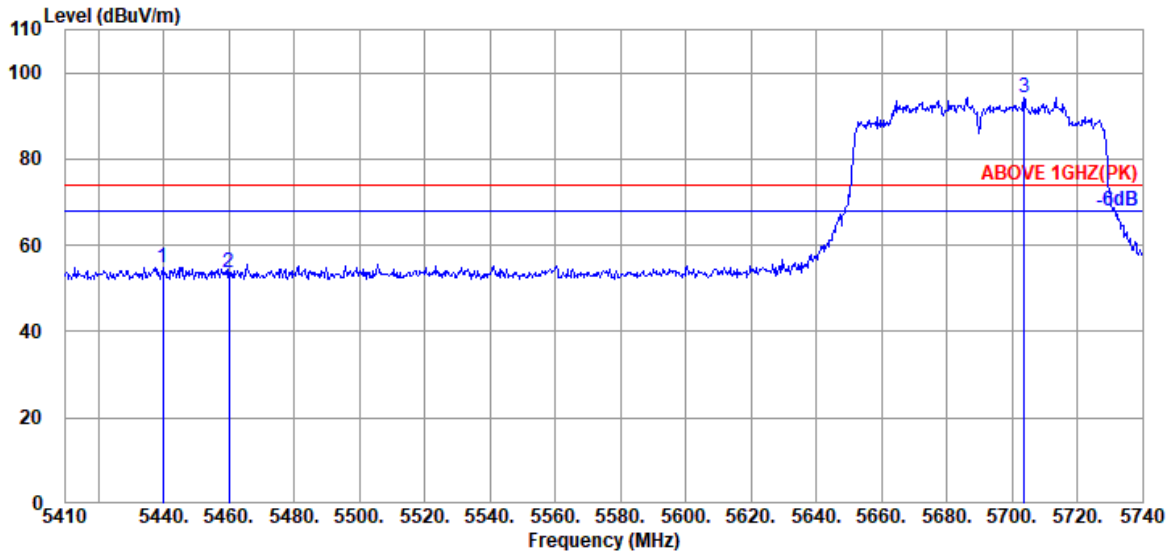

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.700	34.17	9.04	39.26	51.02	54.97	74.00	19.03	Peak
5460.160	34.20	9.05	39.26	49.66	53.65	74.00	20.35	Peak
@ 5703.700	33.80	9.18	39.30	90.58	94.26	---	---	Peak

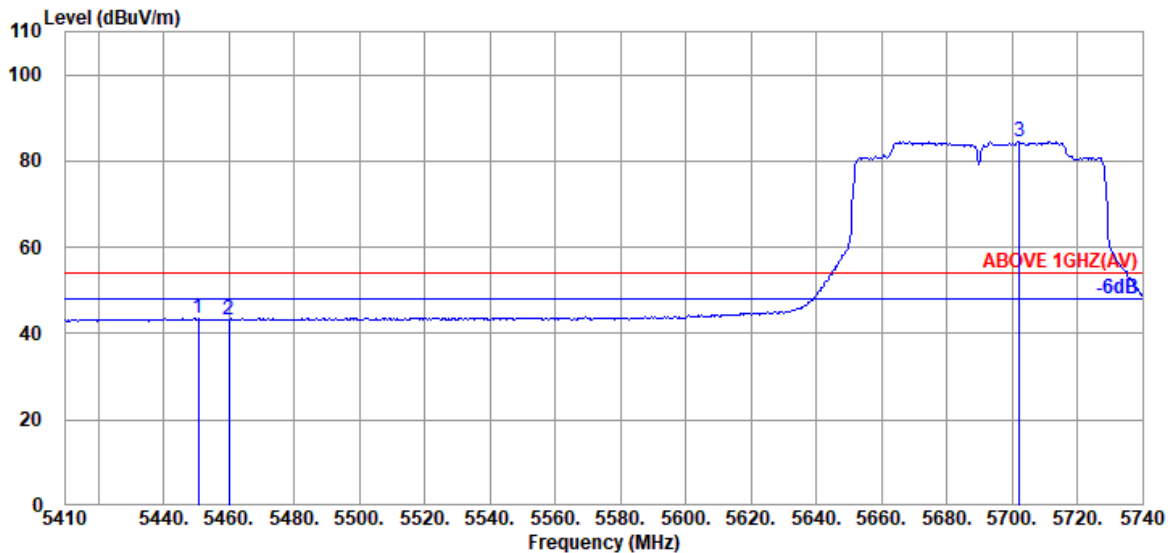


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.20	9.05	39.26	39.45	43.44	54.00	10.56	Average
5460.160	34.20	9.05	39.26	39.32	43.31	54.00	10.69	Average
@ 5702.380	33.80	9.18	39.30	80.98	84.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

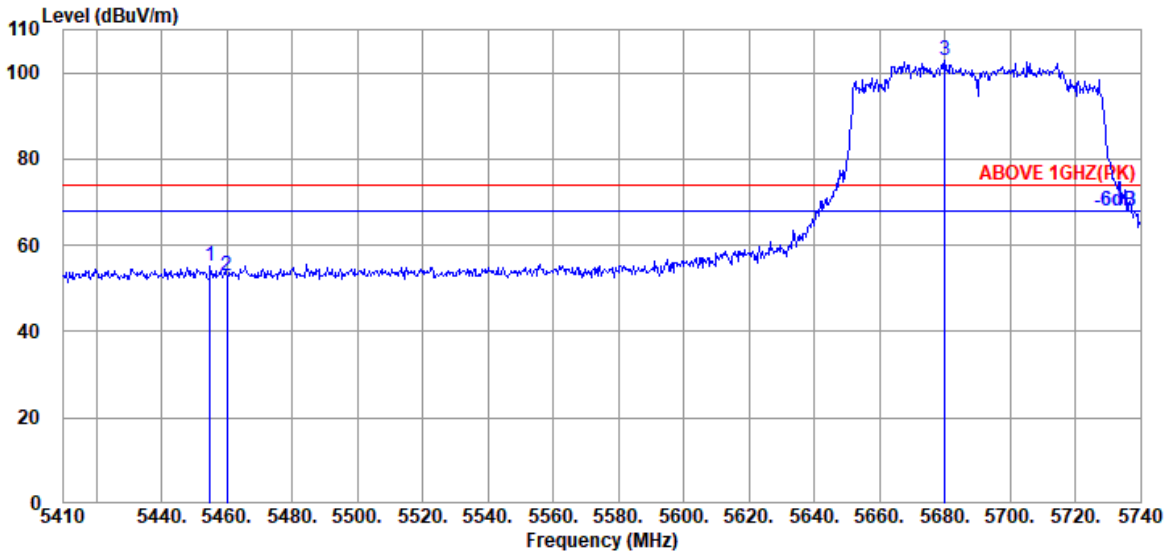

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.20	9.05	39.26	51.30	55.29	74.00	18.71	Peak
5460.160	34.20	9.05	39.26	49.12	53.11	74.00	20.89	Peak
@ 5679.940	33.87	9.17	39.30	99.24	102.98	---	---	Peak

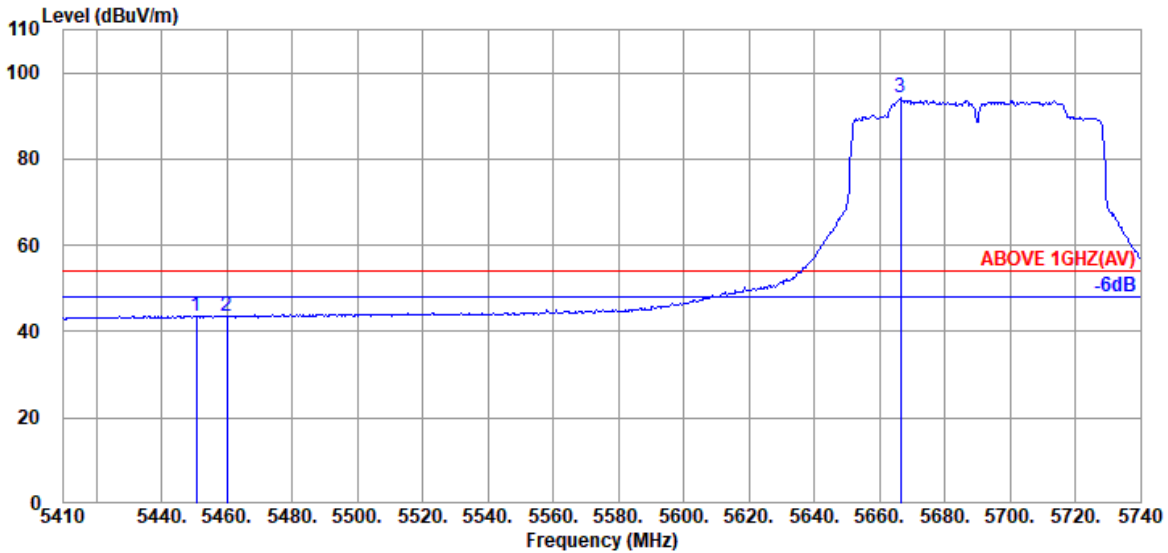


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.20	9.05	39.26	39.72	43.71	54.00	10.29	Average
5460.160	34.20	9.05	39.26	39.45	43.44	54.00	10.56	Average
@ 5666.410	33.93	9.16	39.29	90.37	94.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

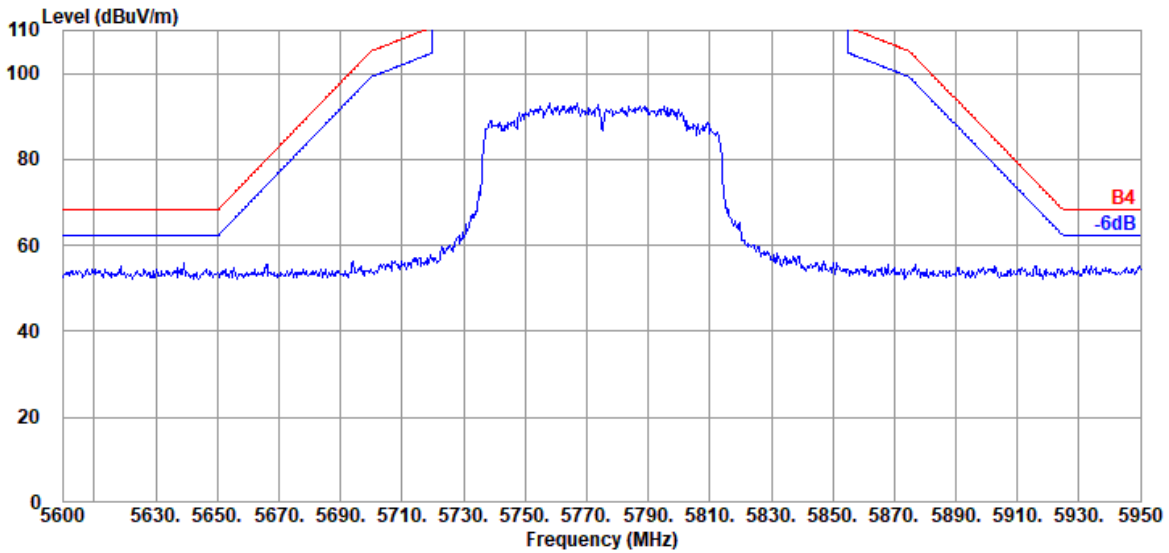

Antenna at Vertical Polarization

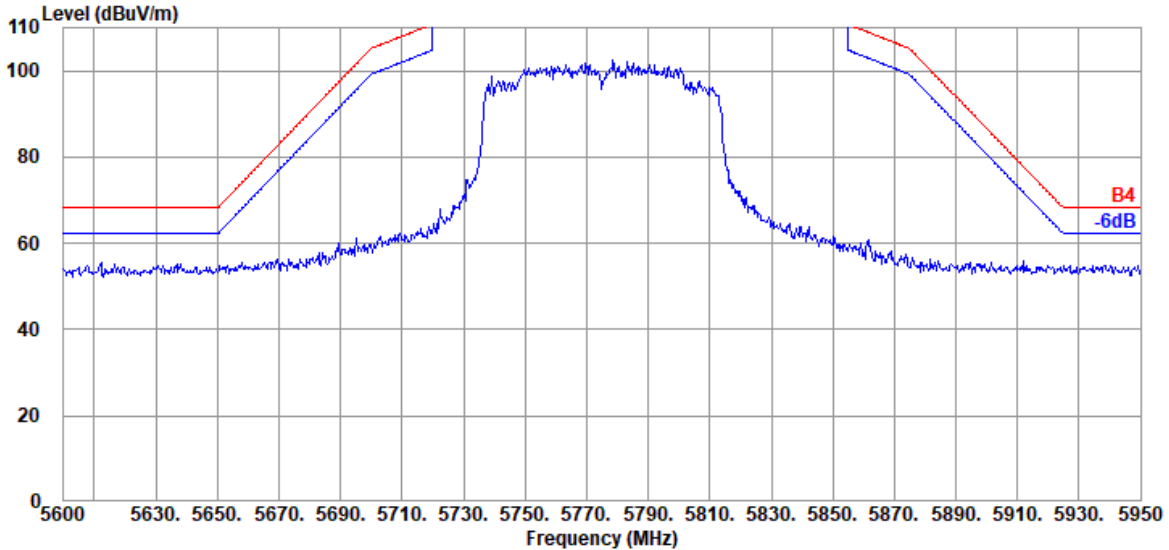


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

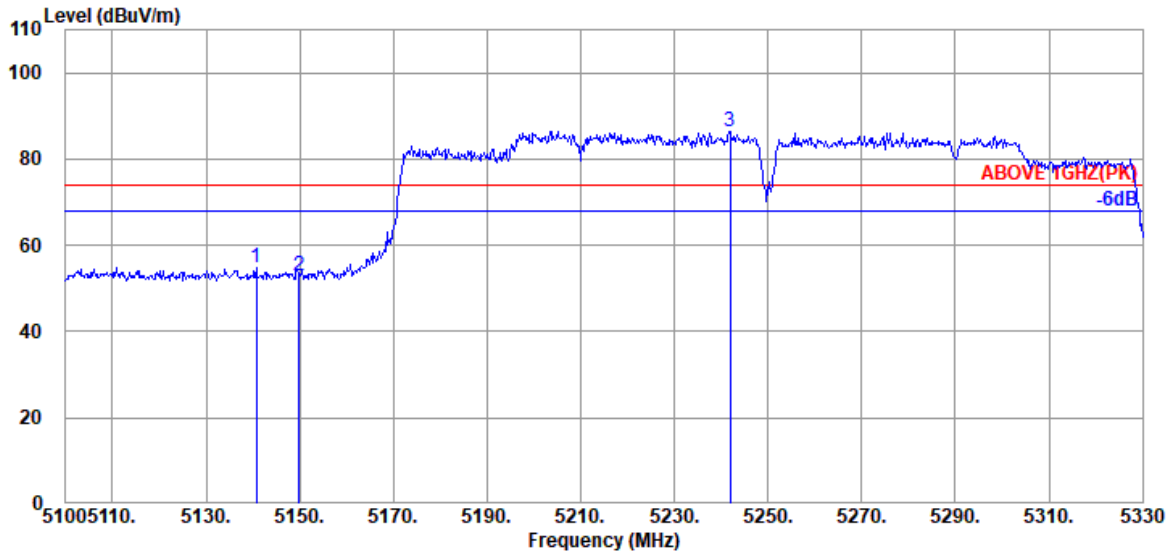

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.710	33.70	8.88	39.29	51.39	54.68	74.00	19.32	Peak
5149.910	33.70	8.88	39.29	49.59	52.88	74.00	21.12	Peak
@ 5241.910	33.78	8.93	39.28	83.00	86.43	---	---	Peak

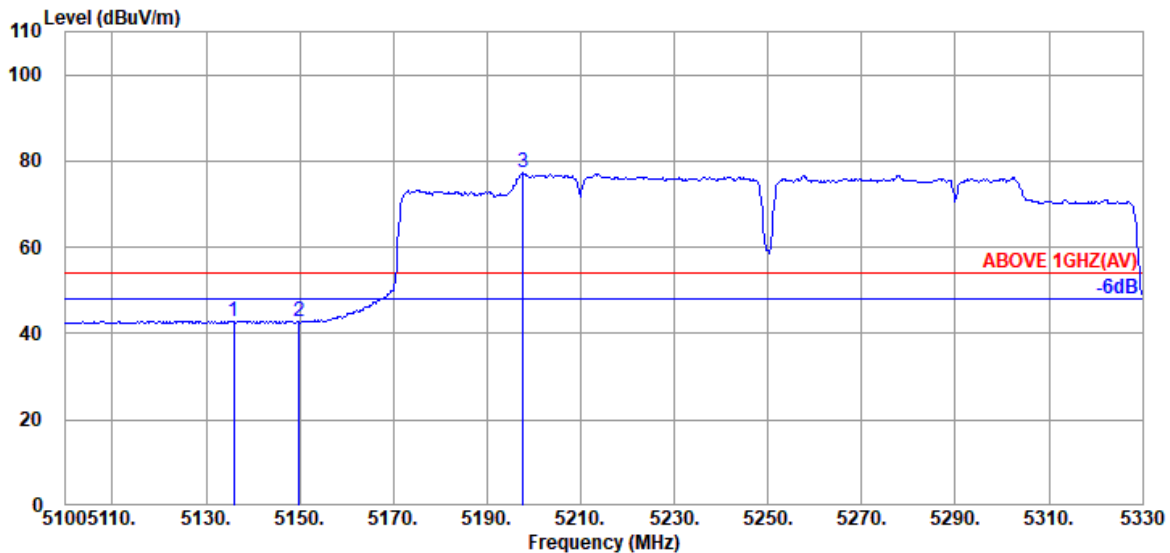


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.880	33.70	8.88	39.29	39.64	42.93	54.00	11.07	Average
5149.910	33.70	8.88	39.29	39.45	42.74	54.00	11.26	Average
@ 5197.750	33.70	8.91	39.28	73.82	77.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

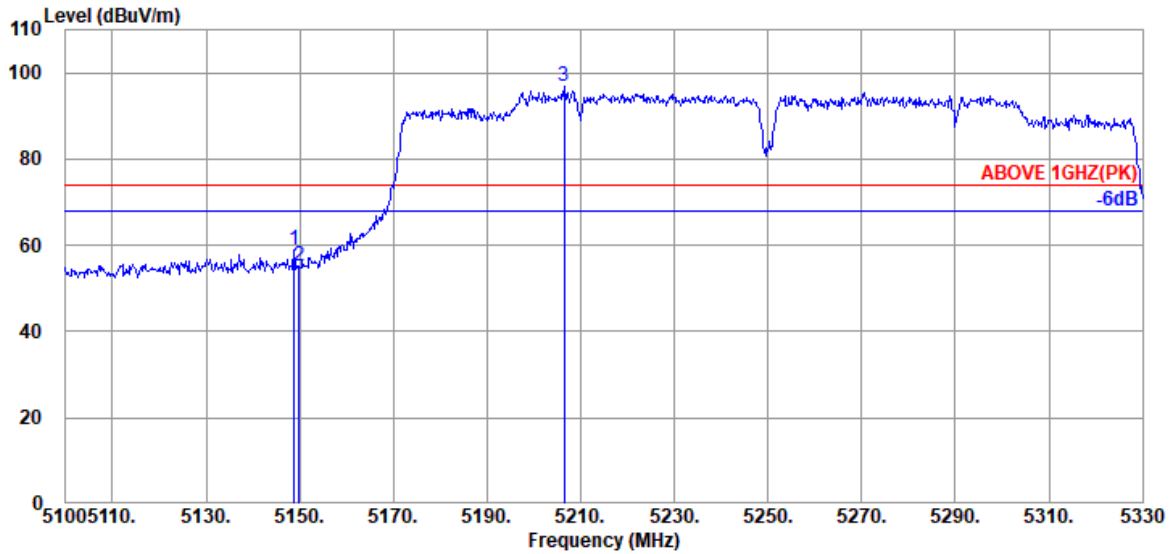

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.760	33.70	8.88	39.29	55.84	59.13	74.00	14.87	Peak
5149.910	33.70	8.88	39.29	51.81	55.10	74.00	18.90	Peak
@ 5206.490	33.72	8.92	39.28	93.35	96.71	---	---	Peak

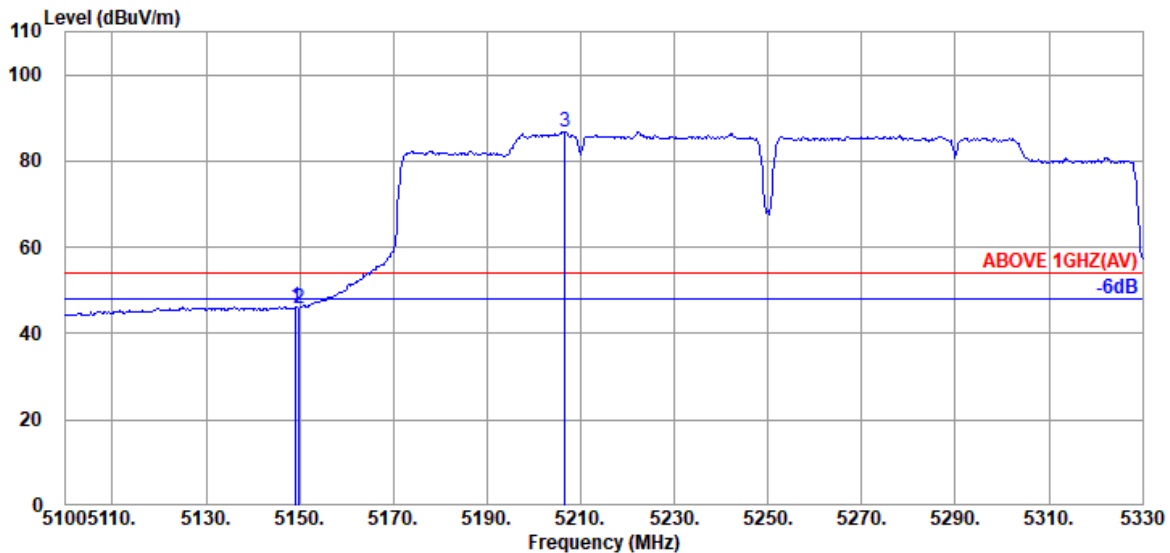


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	33.70	8.88	39.29	43.04	46.33	54.00	7.67	Average
5149.910	33.70	8.88	39.29	42.50	45.79	54.00	8.21	Average
@ 5206.720	33.72	8.92	39.28	83.49	86.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

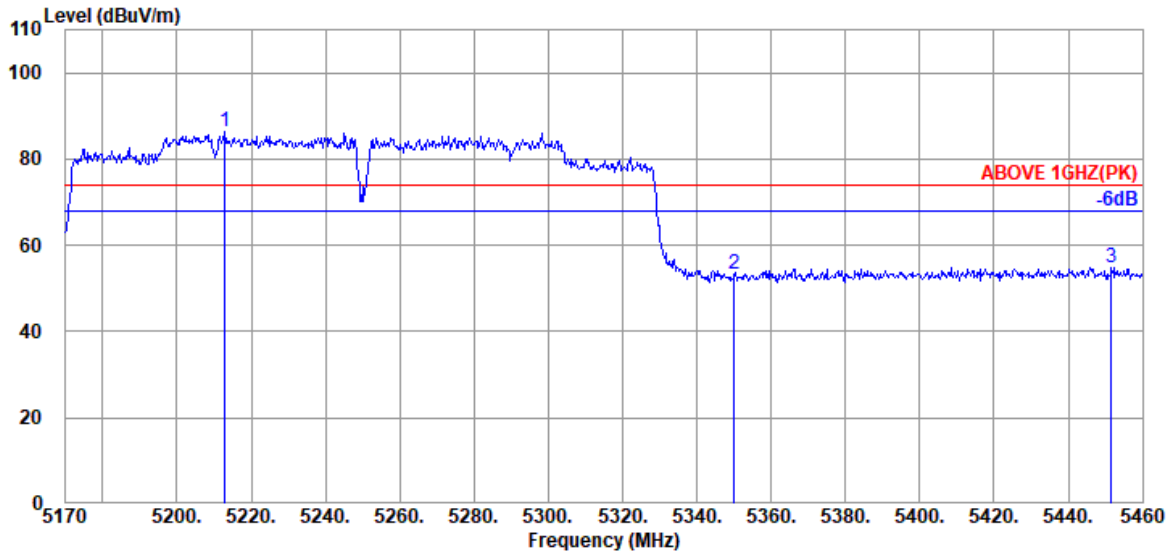

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5212.920	33.72	8.92	39.28	83.03	86.39	---	---	Peak
5350.090	33.90	8.99	39.27	49.65	53.27	74.00	20.73	Peak
5451.590	34.20	9.05	39.26	50.71	54.70	74.00	19.30	Peak

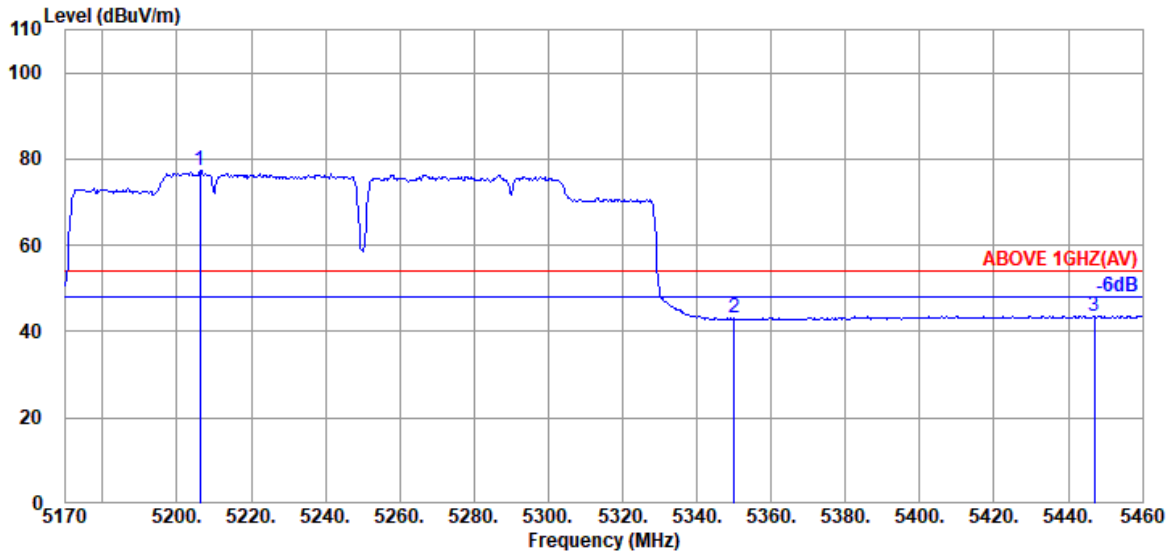


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.250	33.72	8.92	39.28	73.91	77.27	---	---	Average
5350.090	33.90	8.99	39.27	39.40	43.02	54.00	10.98	Average
5446.950	34.17	9.04	39.26	39.68	43.63	54.00	10.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

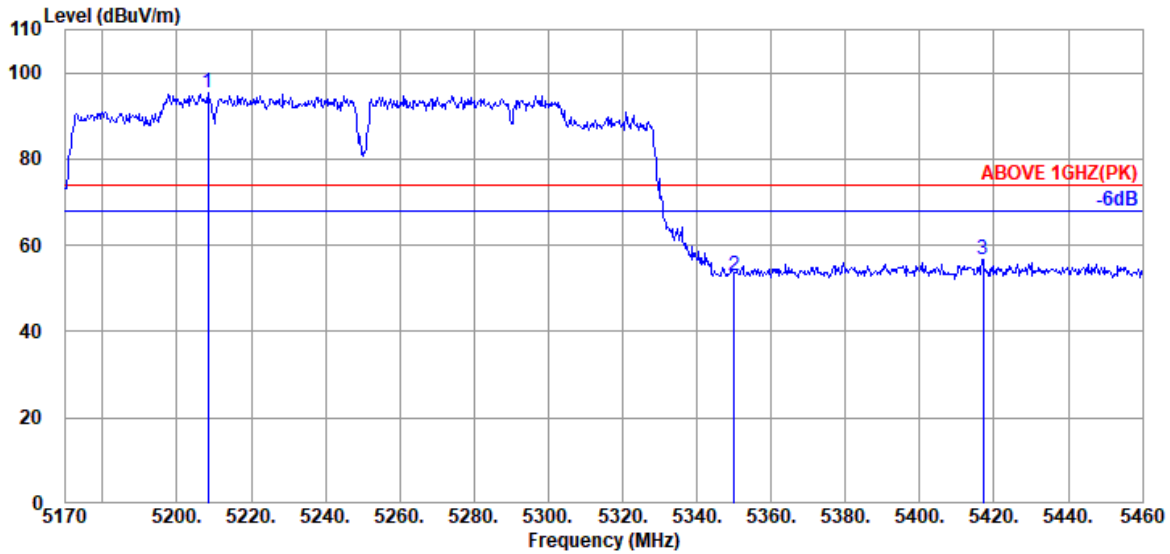

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5208.280	33.72	8.92	39.28	91.84	95.20	---	---	Peak
5350.090	33.90	8.99	39.27	49.48	53.10	74.00	20.90	Peak
5417.080	34.15	9.04	39.27	52.62	56.54	74.00	17.46	Peak

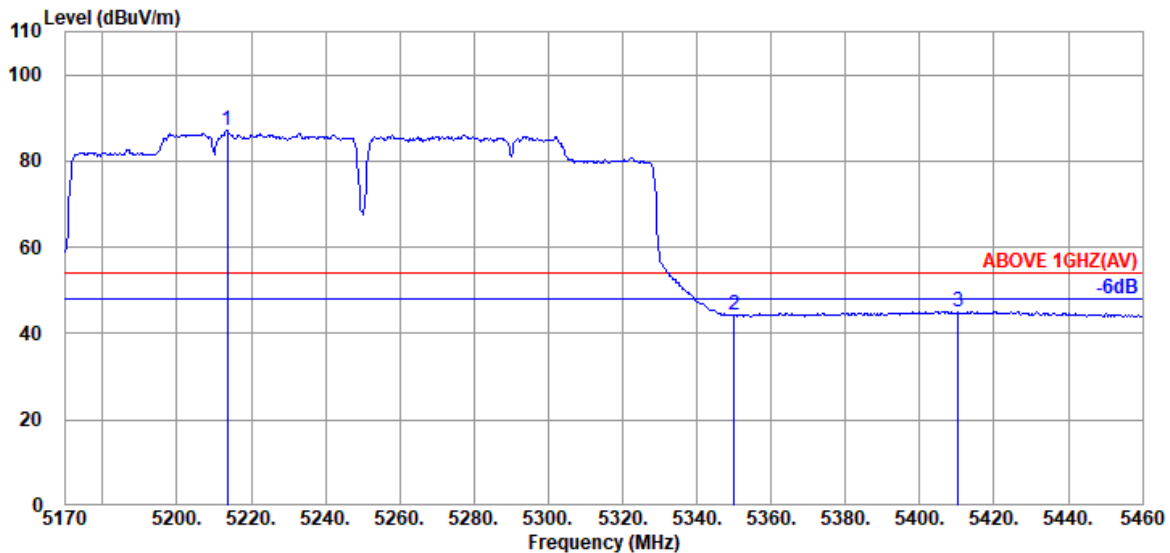


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.500	33.72	8.92	39.28	83.79	87.15	---	---	Average
5350.090	33.90	8.99	39.27	40.69	44.31	54.00	9.69	Average
5410.410	34.12	9.03	39.27	41.23	45.11	54.00	8.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

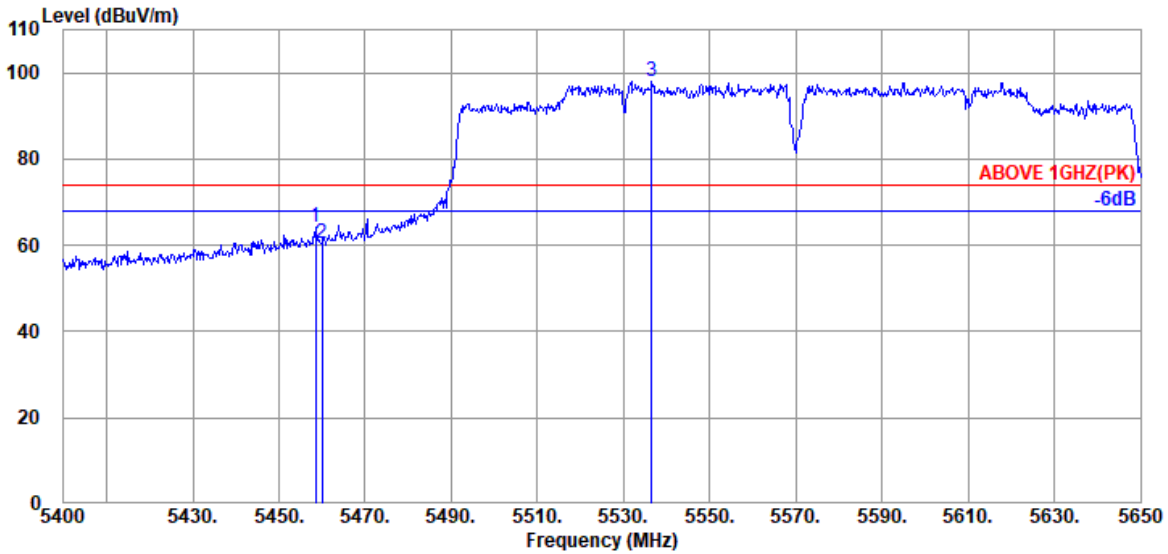

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.20	9.05	39.26	60.15	64.14	74.00	9.86	Peak
5460.000	34.20	9.05	39.26	56.36	60.35	74.00	13.65	Peak
@ 5536.500	34.10	9.09	39.27	94.08	98.00	---	---	Peak

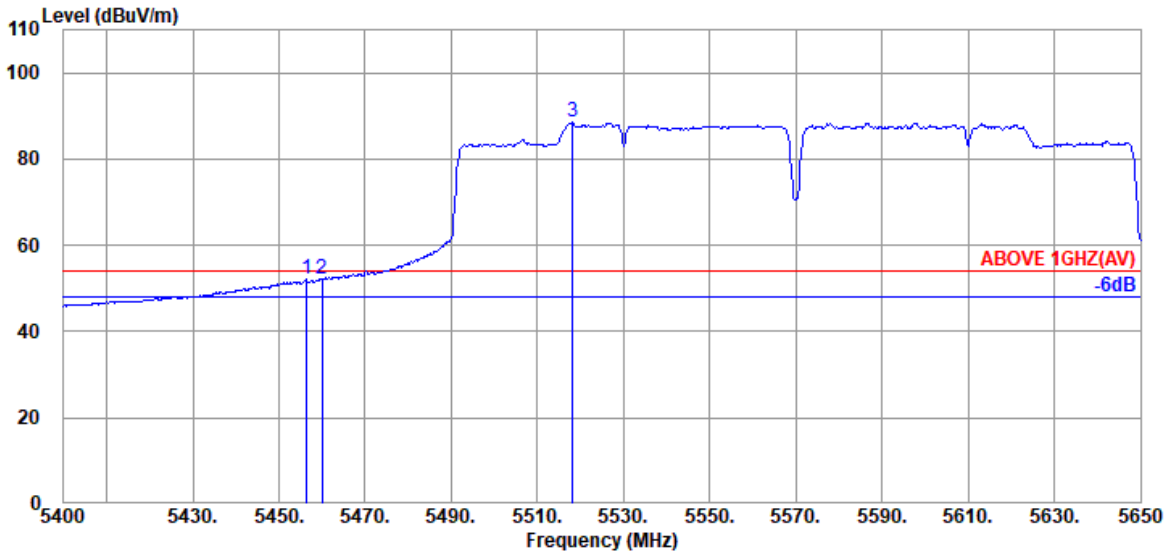


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.20	9.05	39.26	48.01	52.00	54.00	2.00	Average
5460.000	34.20	9.05	39.26	48.11	52.10	54.00	1.90	Average
@ 5518.250	34.10	9.09	39.26	84.52	88.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

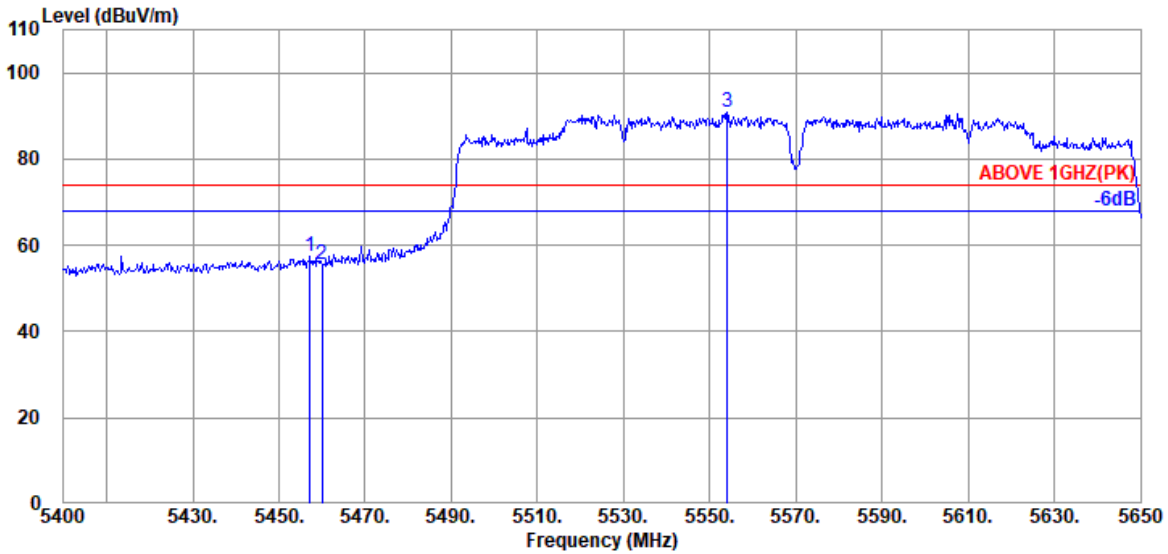

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.250	34.20	9.05	39.26	53.27	57.26	74.00	16.74	Peak
5460.000	34.20	9.05	39.26	51.65	55.64	74.00	18.36	Peak
@ 5554.000	34.10	9.10	39.27	86.77	90.70	---	---	Peak

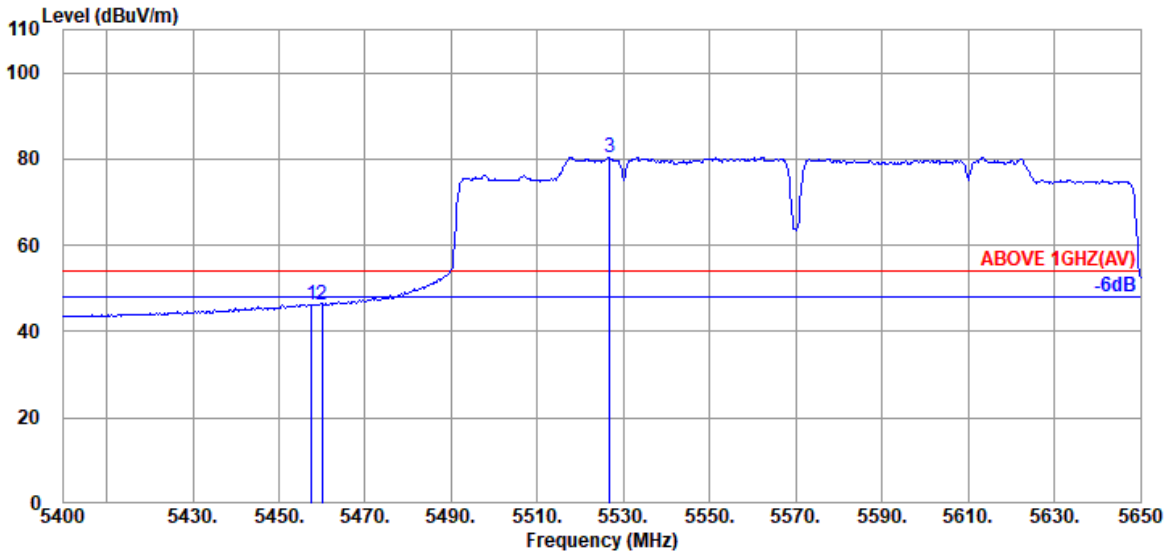


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.20	9.05	39.26	42.37	46.36	54.00	7.64	Average
5460.000	34.20	9.05	39.26	42.34	46.33	54.00	7.67	Average
@ 5526.750	34.10	9.09	39.27	76.58	80.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

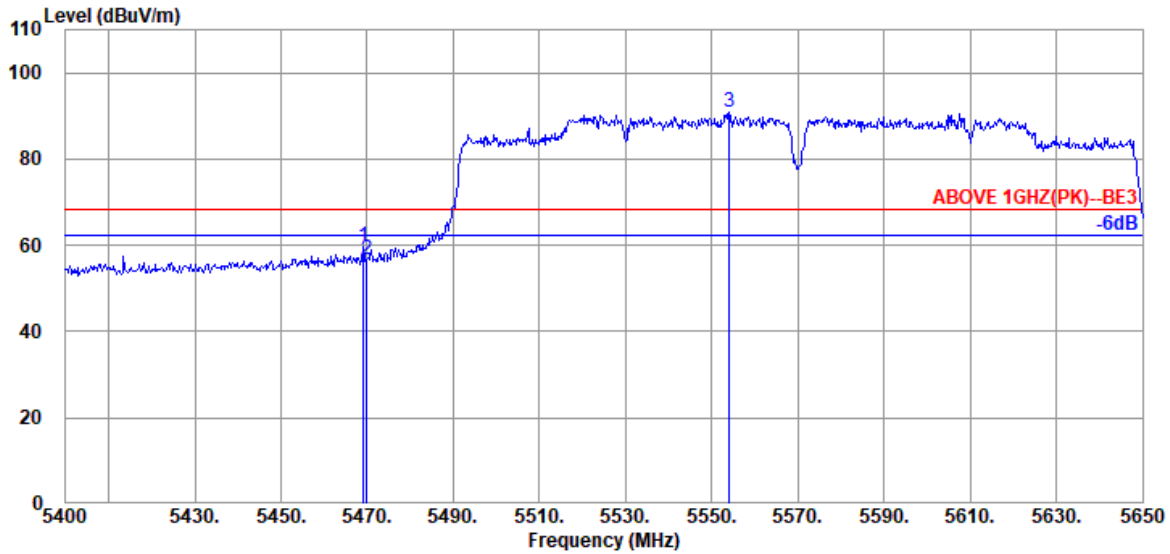

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5469.250	34.17	9.06	39.26	55.71	59.68	68.20	8.52	Peak
5470.000	34.17	9.06	39.26	52.80	56.77	68.20	11.43	Peak
5554.000	34.10	9.10	39.27	86.77	90.70	---	---	Peak

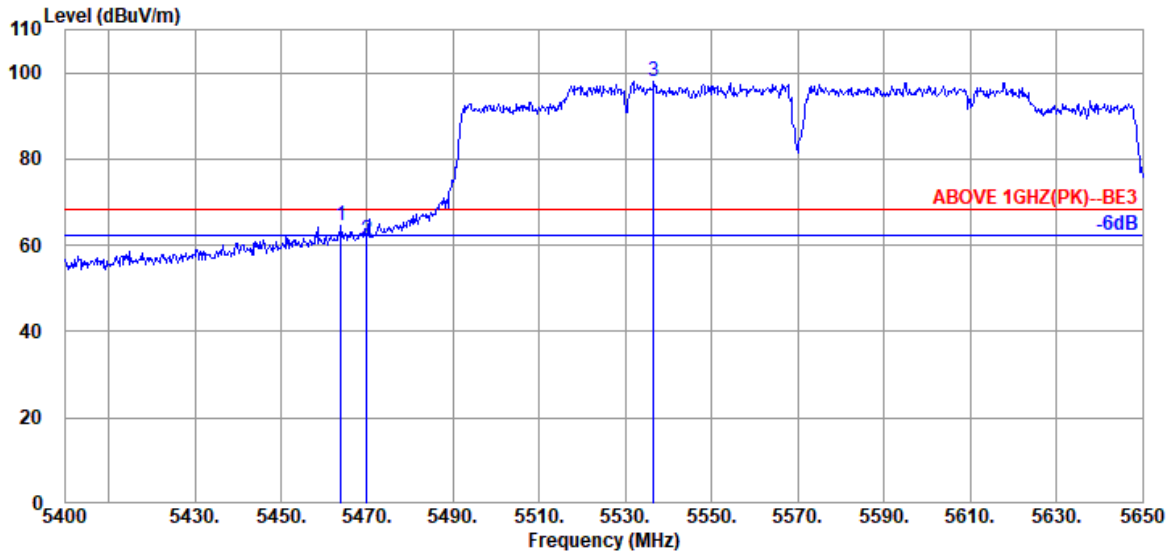


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5464.000	34.17	9.06	39.26	60.78	64.75	68.20	3.45	Peak
5470.000	34.17	9.06	39.26	57.39	61.36	68.20	6.84	Peak
5536.500	34.10	9.09	39.27	94.08	98.00	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

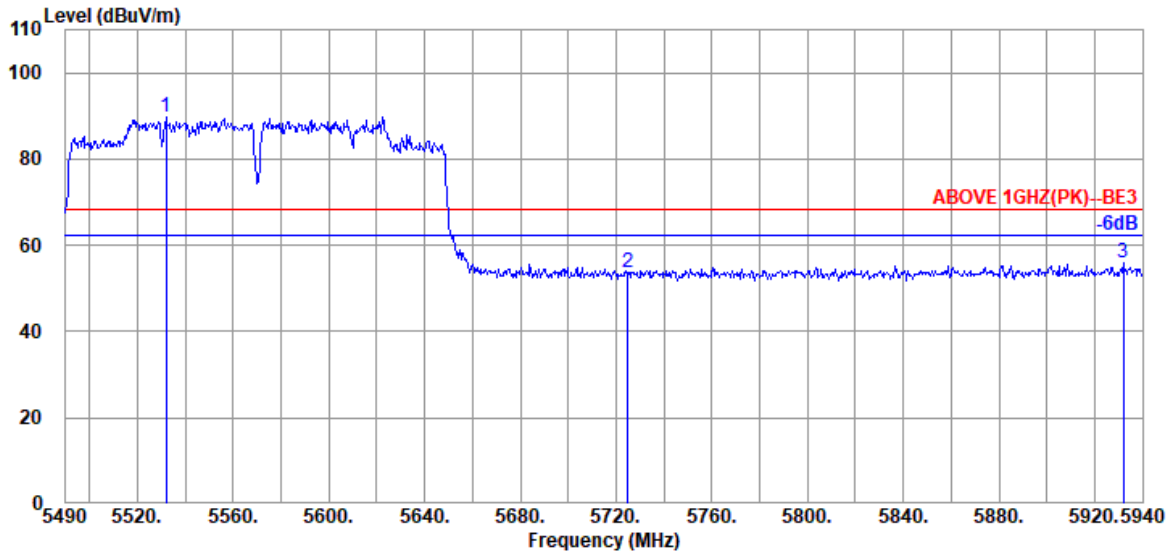

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5531.850	34.10	9.09	39.27	85.91	89.83	---	---	Peak
5724.900	33.80	9.20	39.30	49.84	53.54	68.20	14.66	Peak
5931.900	34.23	9.30	39.35	51.90	56.08	68.20	12.12	Peak

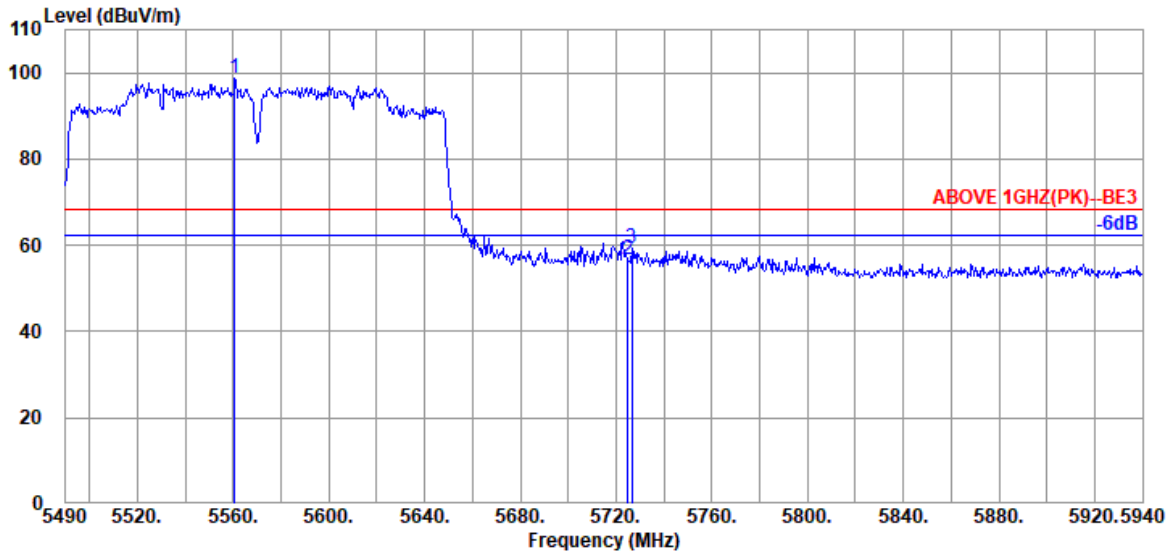


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5560.650	34.07	9.11	39.27	94.70	98.61	---	---	Peak
5724.900	33.80	9.20	39.30	53.00	56.70	68.20	11.50	Peak
5726.700	33.80	9.20	39.31	55.79	59.48	68.20	8.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

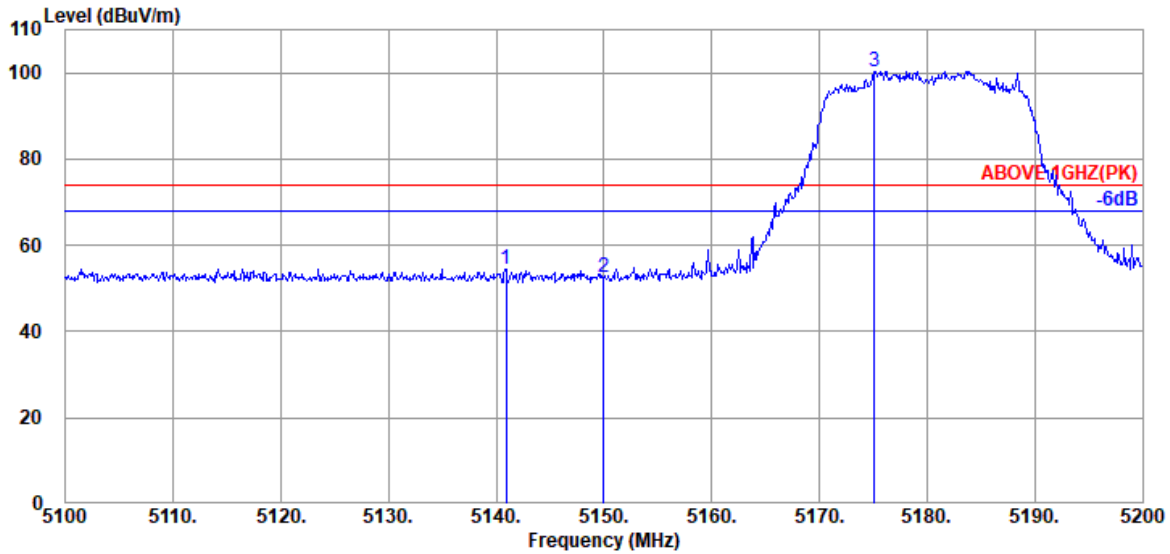

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.900	33.70	8.88	39.29	51.32	54.61	74.00	19.39	Peak
5150.000	33.70	8.88	39.29	49.18	52.47	74.00	21.53	Peak
@ 5175.100	33.70	8.90	39.28	97.09	100.41	---	---	Peak

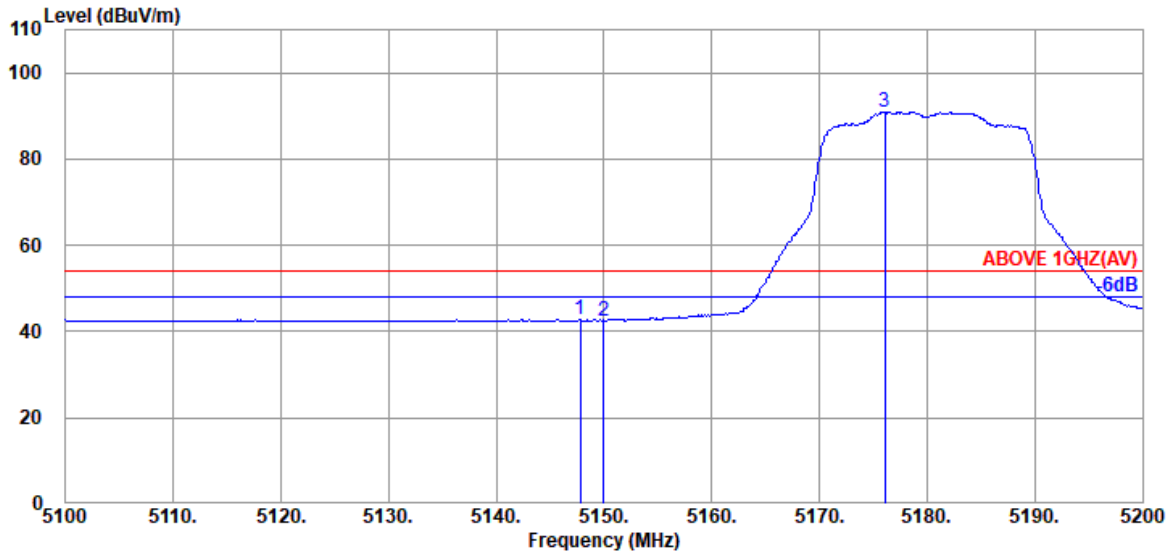


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.70	8.88	39.29	39.64	42.93	54.00	11.07	Peak
5150.000	33.70	8.88	39.29	39.23	42.52	54.00	11.48	Peak
@ 5176.100	33.70	8.90	39.28	87.71	91.03	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

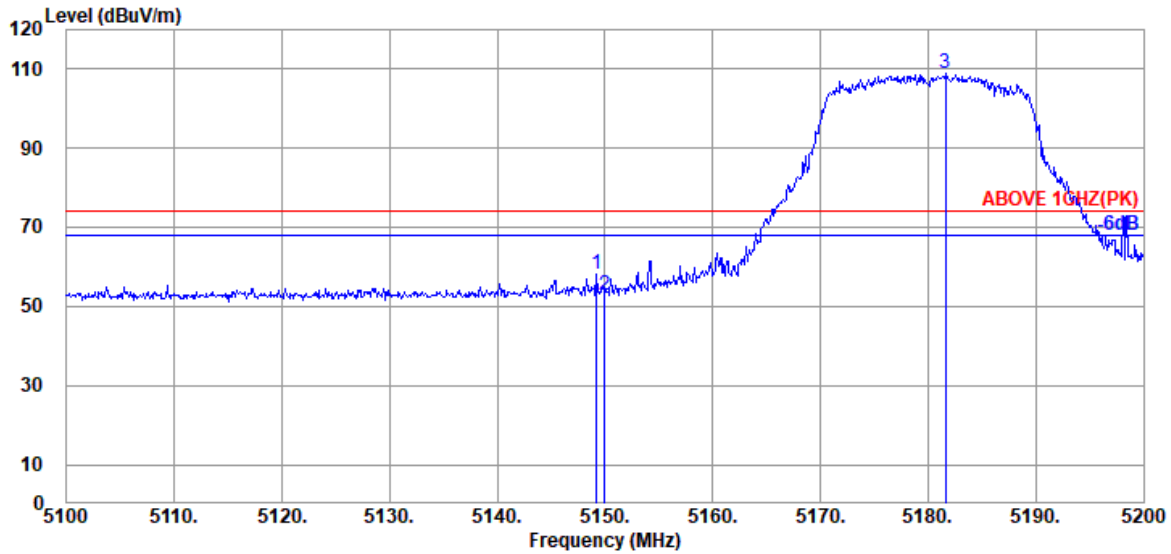

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.88	39.29	54.73	58.02	74.00	15.98	Peak
5150.000	33.70	8.88	39.29	49.37	52.66	74.00	21.34	Peak
@ 5181.600	33.70	8.90	39.28	105.63	108.95	---	---	Peak

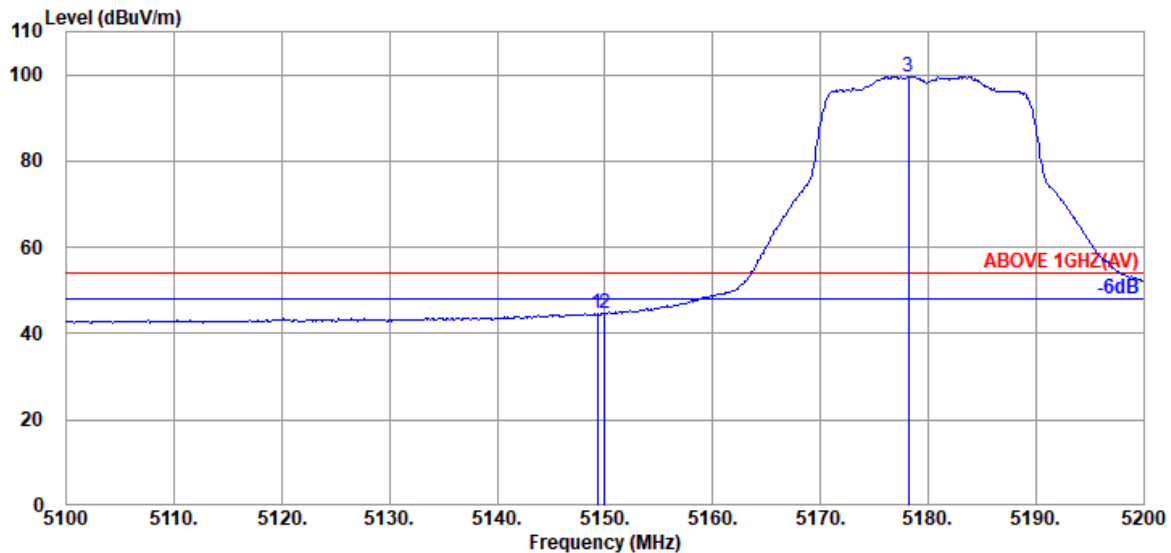


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.88	39.29	41.28	44.57	54.00	9.43	Average
5150.000	33.70	8.88	39.29	41.44	44.73	54.00	9.27	Average
@ 5178.200	33.70	8.90	39.28	96.25	99.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

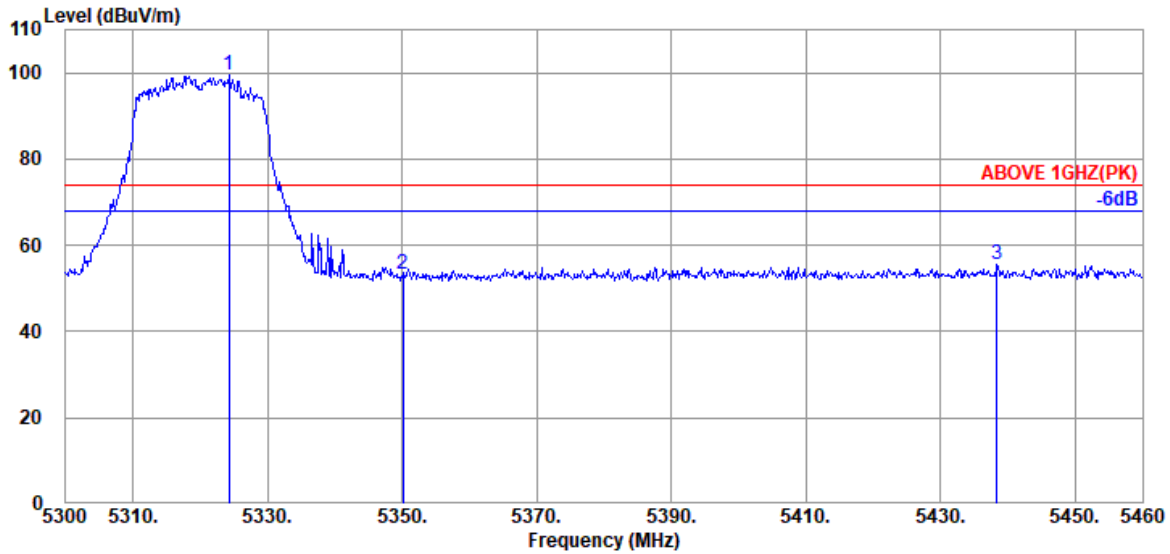

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	33.97	8.99	39.27	95.65	99.34	---	---	Peak
5350.080	33.90	8.99	39.27	49.57	53.19	74.00	20.81	Peak
5438.400	34.17	9.04	39.26	51.51	55.46	74.00	18.54	Peak

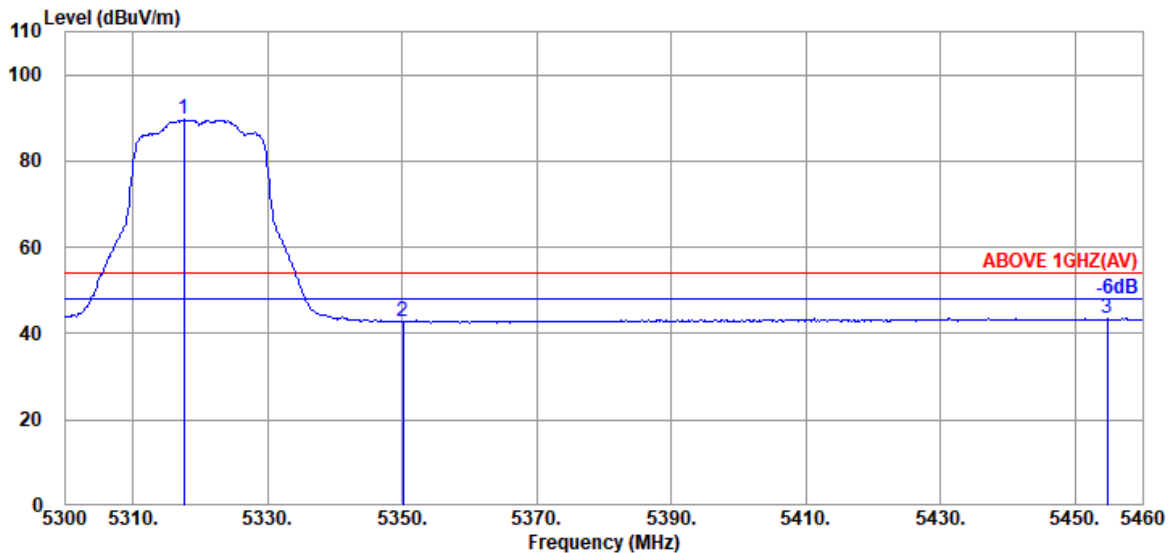


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.03	8.98	39.27	85.85	89.59	---	---	Average
5350.080	33.90	8.99	39.27	39.06	42.68	54.00	11.32	Average
5454.720	34.20	9.05	39.26	39.45	43.44	54.00	10.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

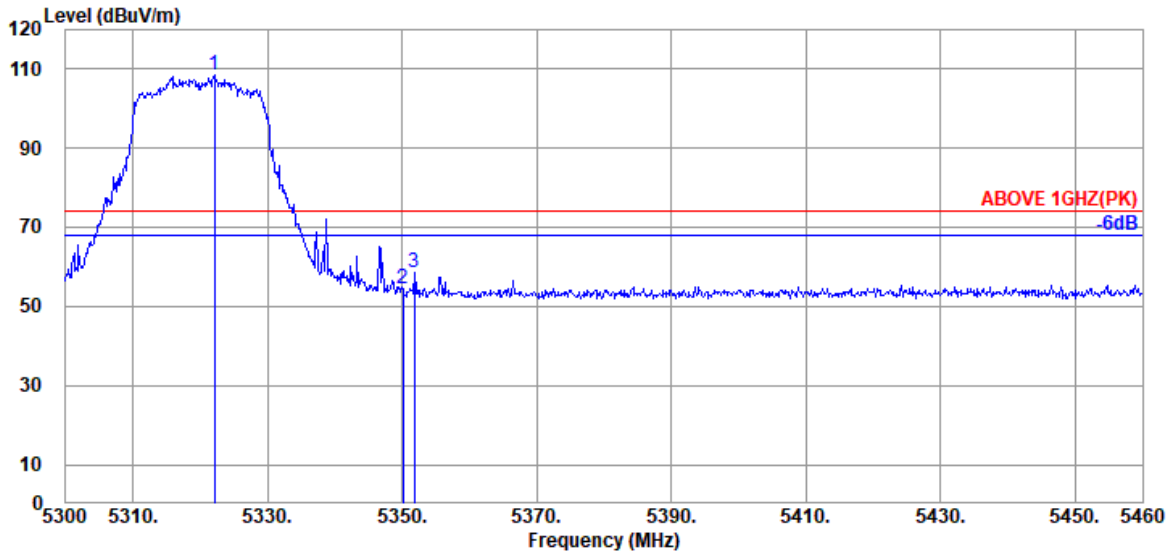

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	34.03	8.98	39.27	104.66	108.40	---	---	Peak
5350.080	33.90	8.99	39.27	50.79	54.41	74.00	19.59	Peak
5351.840	33.90	8.99	39.27	54.87	58.49	74.00	15.51	Peak

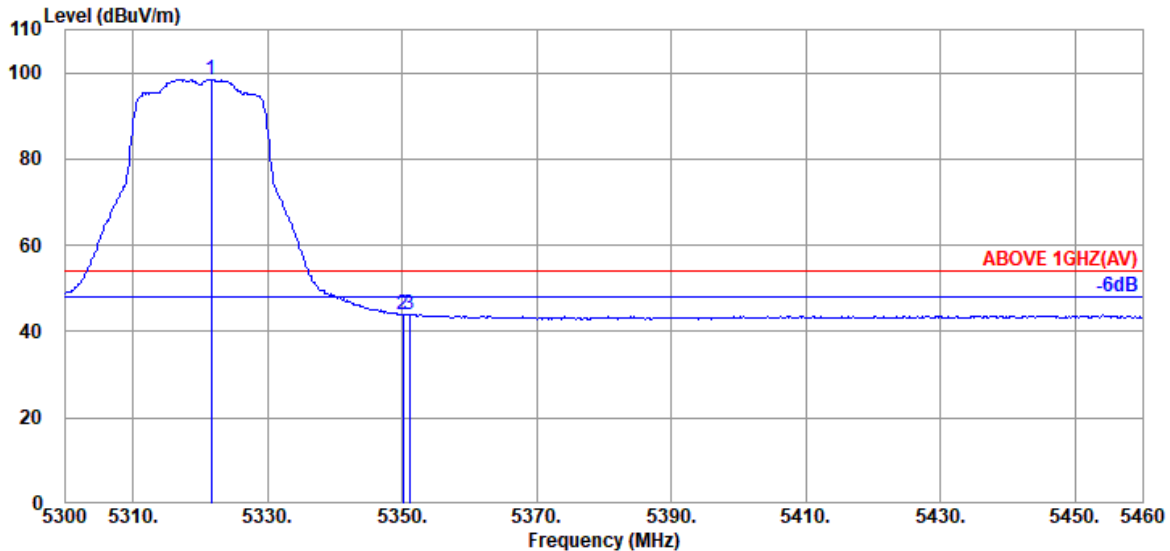


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.600	34.03	8.98	39.27	94.78	98.52	---	---	Average
5350.080	33.90	8.99	39.27	40.34	43.96	54.00	10.04	Average
5351.040	33.90	8.99	39.27	40.48	44.10	54.00	9.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

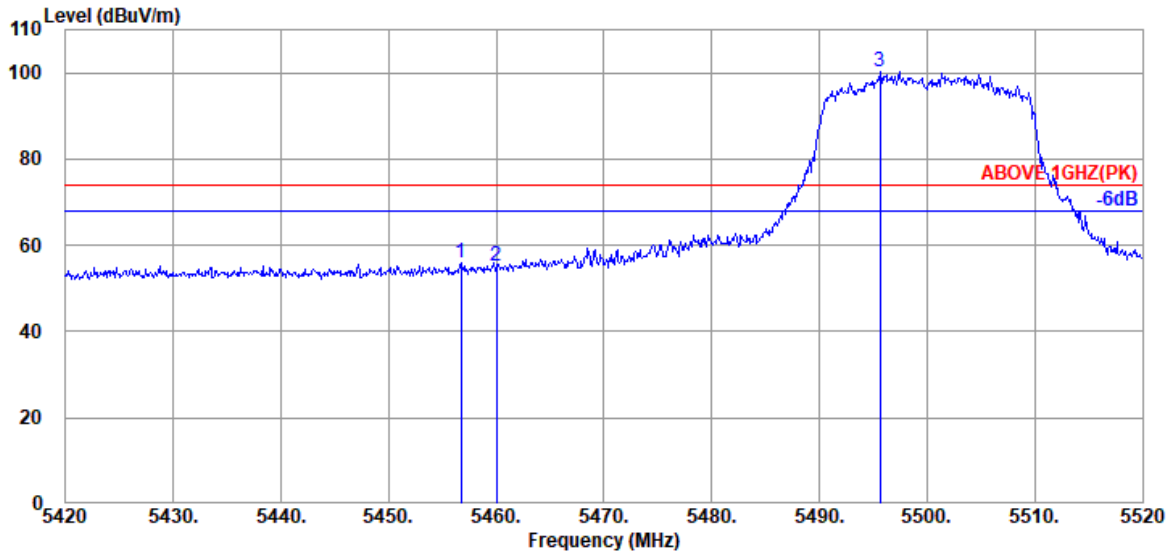

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.700	34.20	9.05	39.26	51.87	55.86	74.00	18.14	Peak
5460.000	34.20	9.05	39.26	51.20	55.19	74.00	18.81	Peak
@ 5495.600	34.10	9.08	39.26	96.23	100.15	---	---	Peak

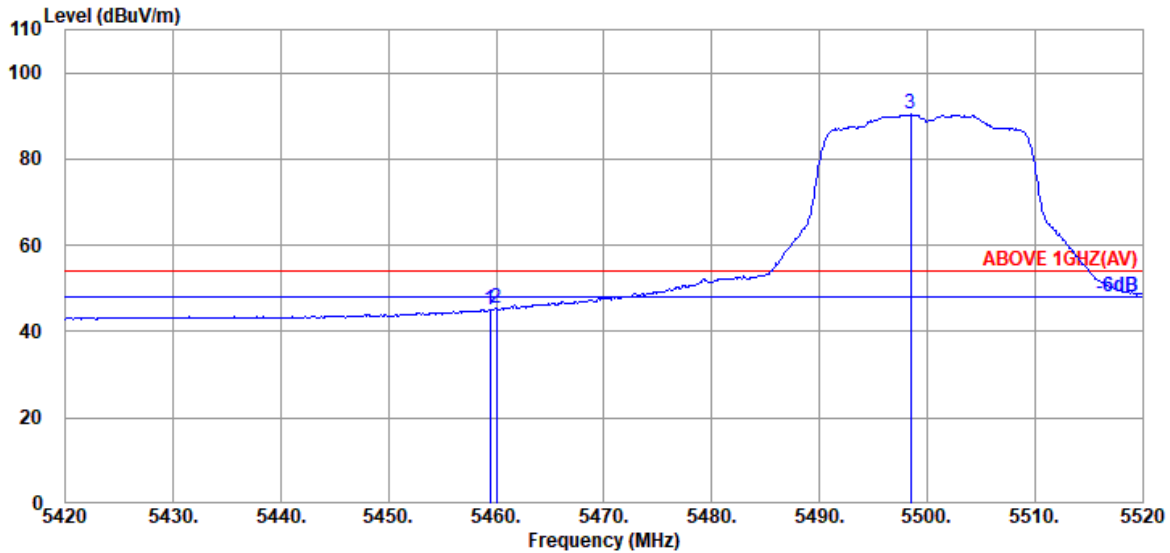


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.20	9.05	39.26	41.15	45.14	54.00	8.86	Average
5460.000	34.20	9.05	39.26	41.41	45.40	54.00	8.60	Average
@ 5498.500	34.10	9.08	39.26	86.38	90.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

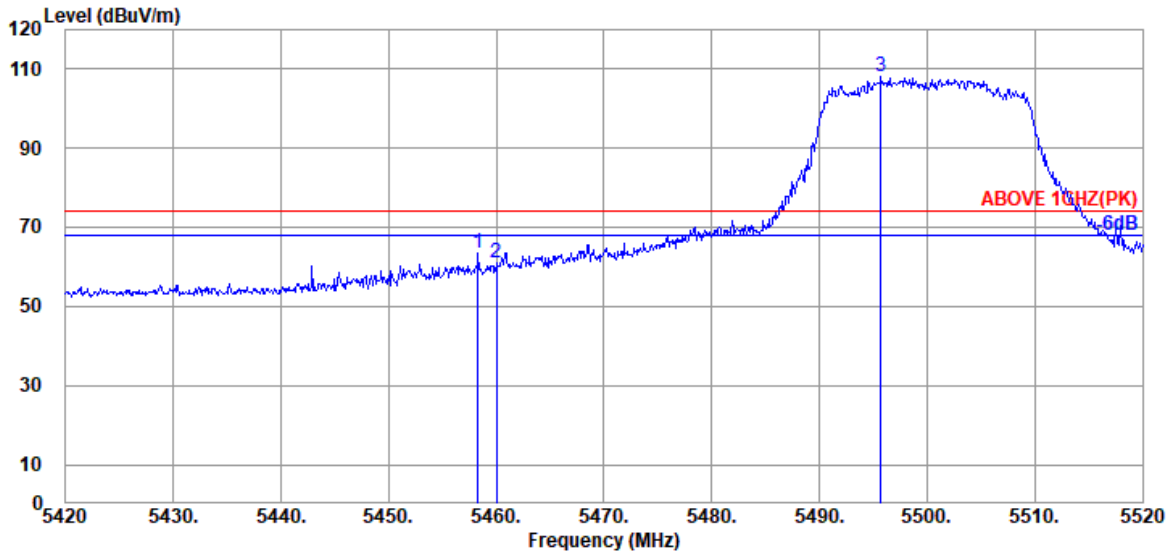

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.300	34.20	9.05	39.26	59.43	63.42	74.00	10.58	Peak
5460.000	34.20	9.05	39.26	56.90	60.89	74.00	13.11	Peak
@ 5495.700	34.10	9.08	39.26	104.37	108.29	---	---	Peak

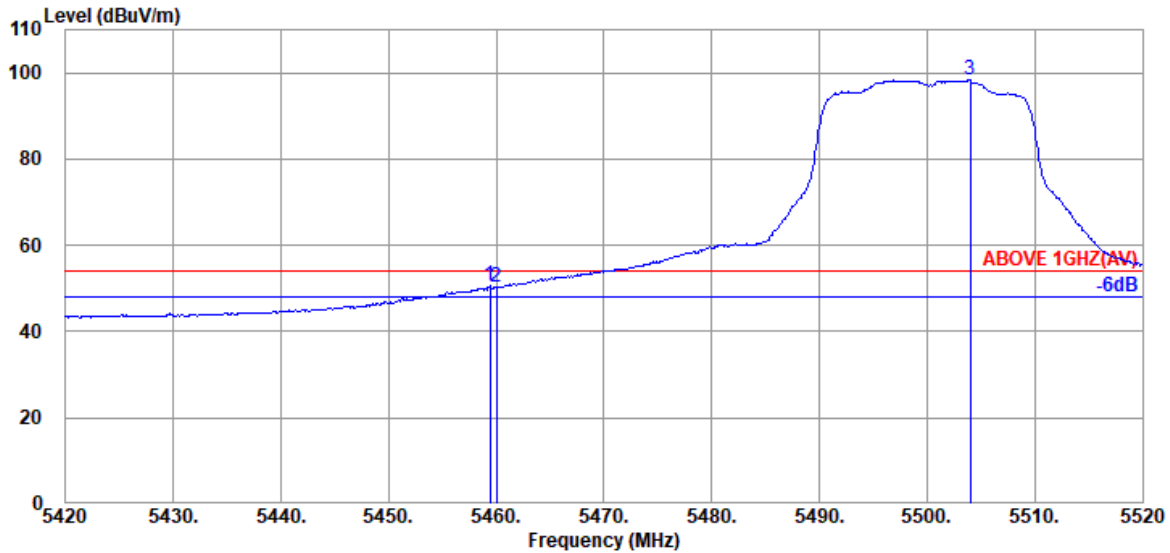


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.20	9.05	39.26	46.54	50.53	54.00	3.47	Average
5460.000	34.20	9.05	39.26	46.40	50.39	54.00	3.61	Average
@ 5504.000	34.10	9.08	39.26	94.32	98.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

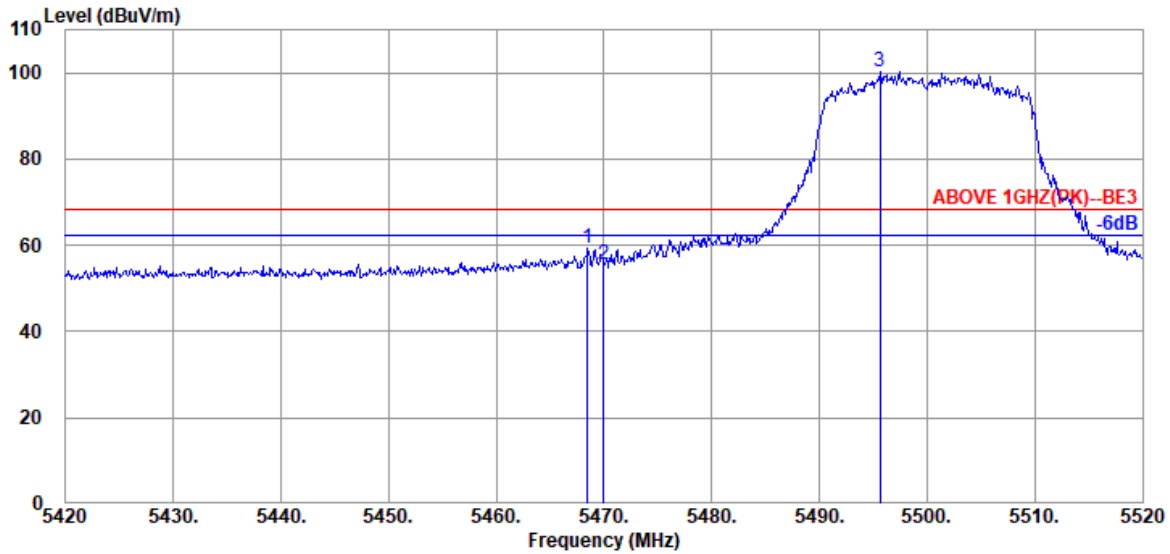

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.500	34.17	9.06	39.26	55.18	59.15	68.20	9.05	Peak
	5470.000	34.17	9.06	39.26	51.54	55.51	68.20	12.69	Peak
	5495.600	34.10	9.08	39.26	96.23	100.15	---	---	Peak

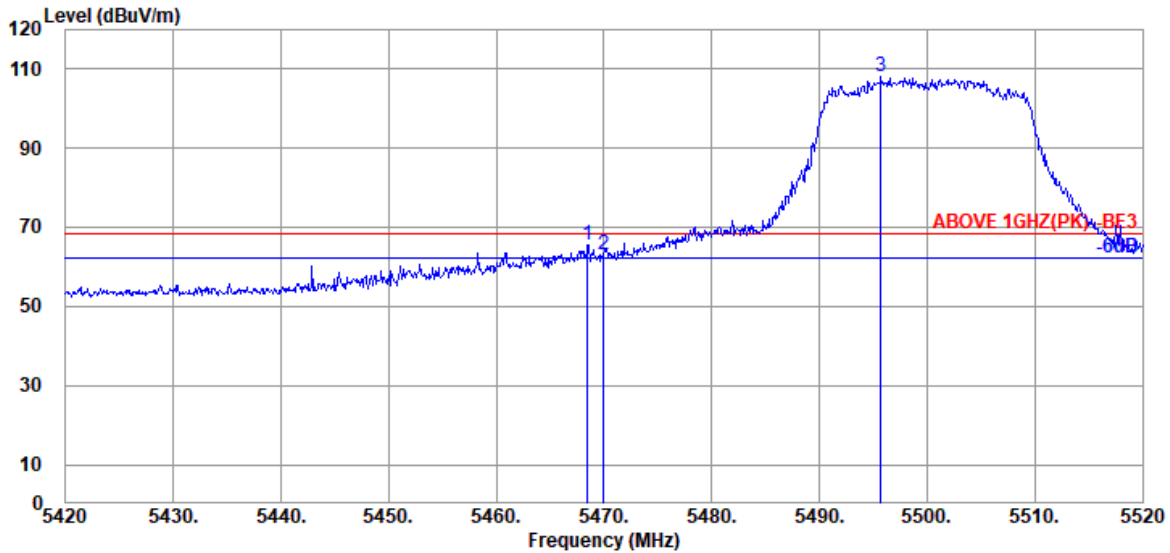


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.500	34.17	9.06	39.26	61.48	65.45	68.20	2.75	Peak
	5470.000	34.17	9.06	39.26	59.08	63.05	68.20	5.15	Peak
	5495.700	34.10	9.08	39.26	104.37	108.29	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

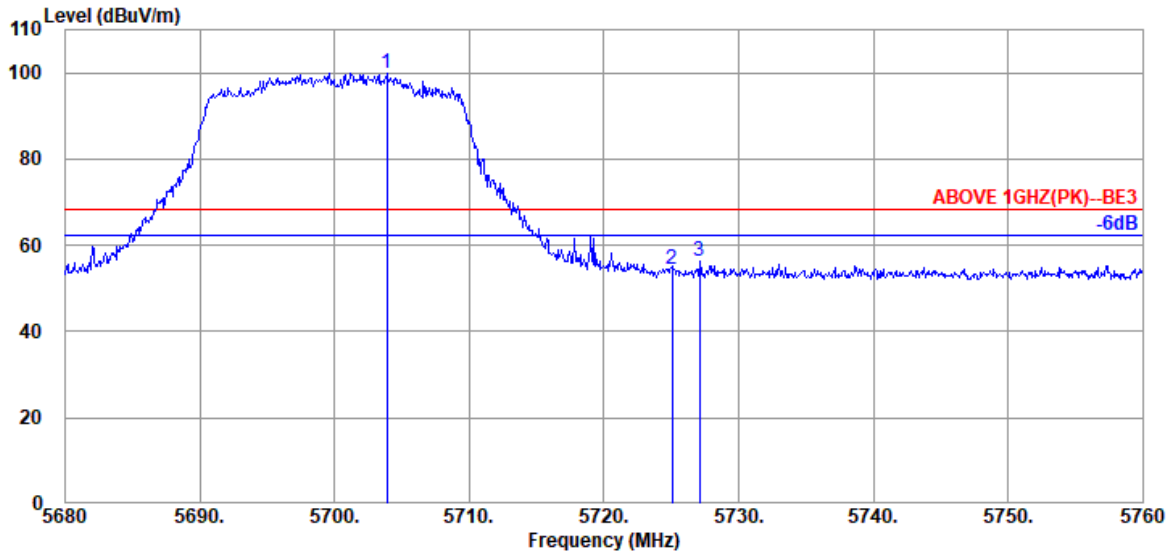

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.840	33.80	9.18	39.30	96.28	99.96	---	---	Peak
5725.040	33.80	9.20	39.30	50.86	54.56	68.20	13.64	Peak
5727.120	33.80	9.20	39.31	52.53	56.22	68.20	11.98	Peak

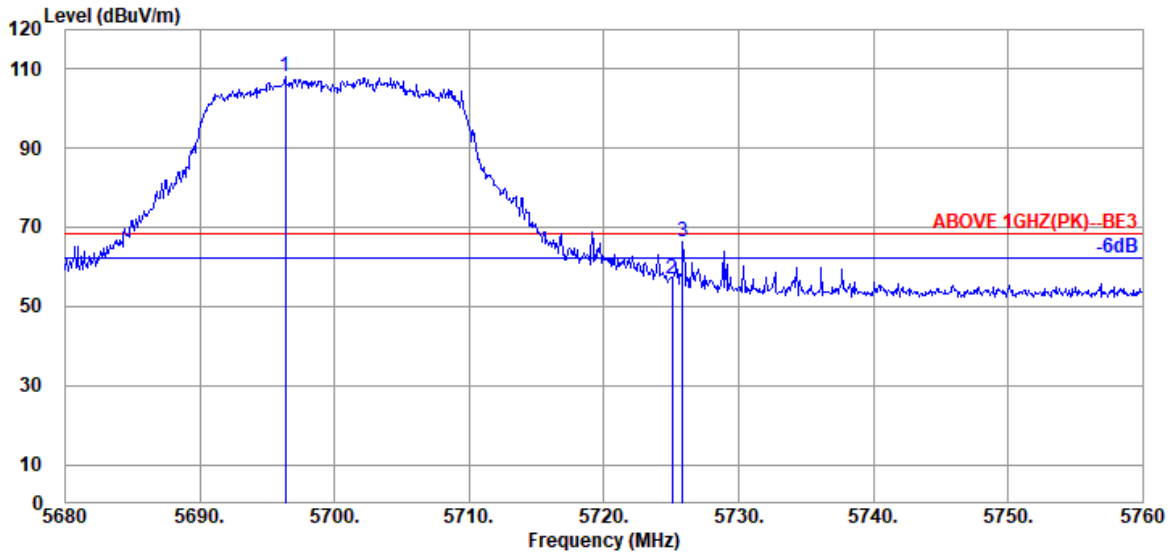


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.320	33.80	9.18	39.30	104.56	108.24	---	---	Peak
5725.040	33.80	9.20	39.30	53.19	56.89	68.20	11.31	Peak
5725.840	33.80	9.20	39.30	62.62	66.32	68.20	1.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

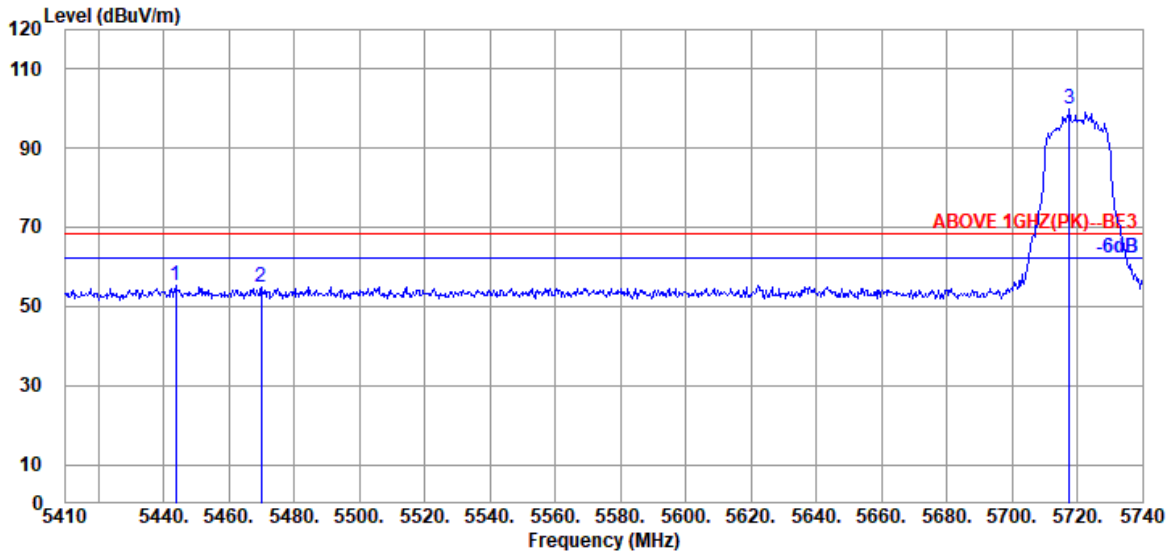

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5443.660	34.17	9.04	39.26	51.22	55.17	68.20	13.03	Peak
5470.060	34.17	9.06	39.26	50.72	54.69	68.20	13.51	Peak
5717.560	33.80	9.19	39.30	96.27	99.96	---	---	Peak

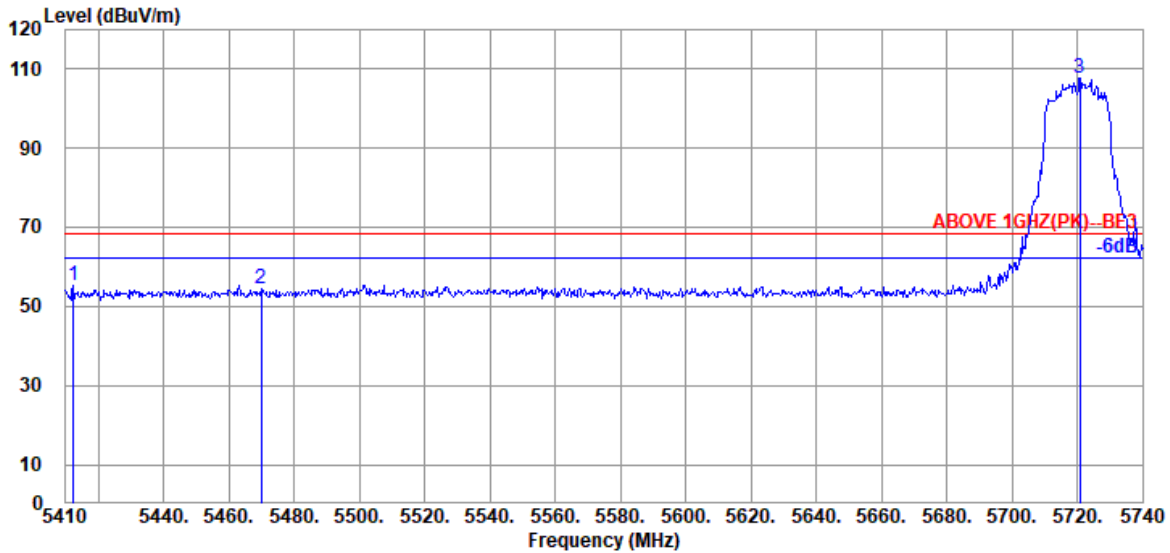


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5412.310	34.12	9.03	39.27	51.35	55.23	68.20	12.97	Peak
5470.060	34.17	9.06	39.26	50.69	54.66	68.20	13.54	Peak
5720.860	33.80	9.19	39.30	104.20	107.89	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

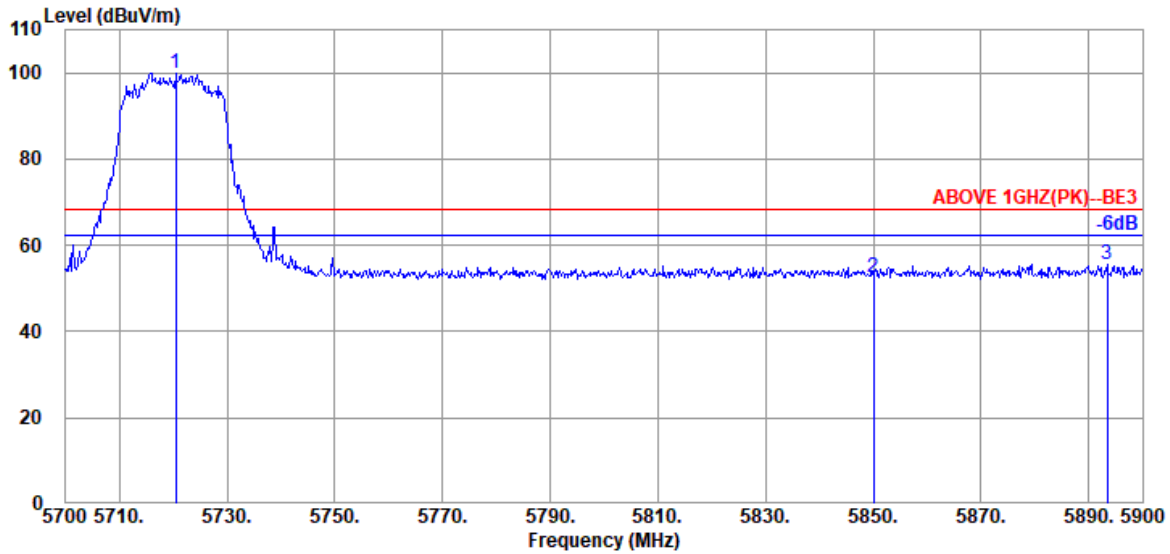

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.400	33.80	9.19	39.30	96.26	99.95	---	---	Peak
5850.000	34.10	9.25	39.33	48.57	52.59	68.20	15.61	Peak
5893.400	34.10	9.28	39.34	51.44	55.48	68.20	12.72	Peak

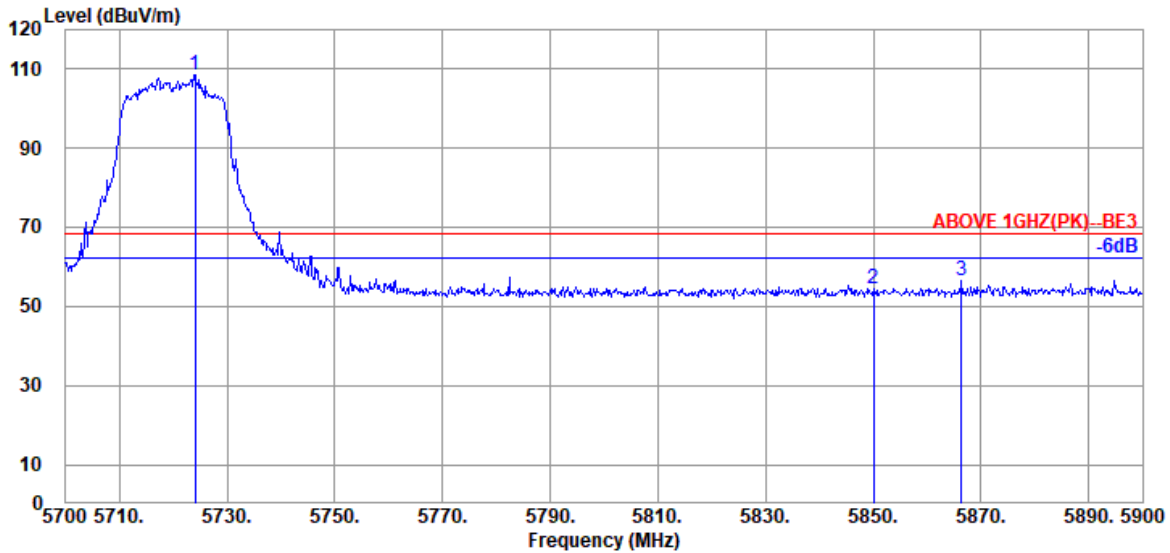


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	33.80	9.20	39.30	104.99	108.69	---	---	Peak
5850.000	34.10	9.25	39.33	50.58	54.60	68.20	13.60	Peak
5866.400	34.10	9.26	39.33	52.67	56.70	68.20	11.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

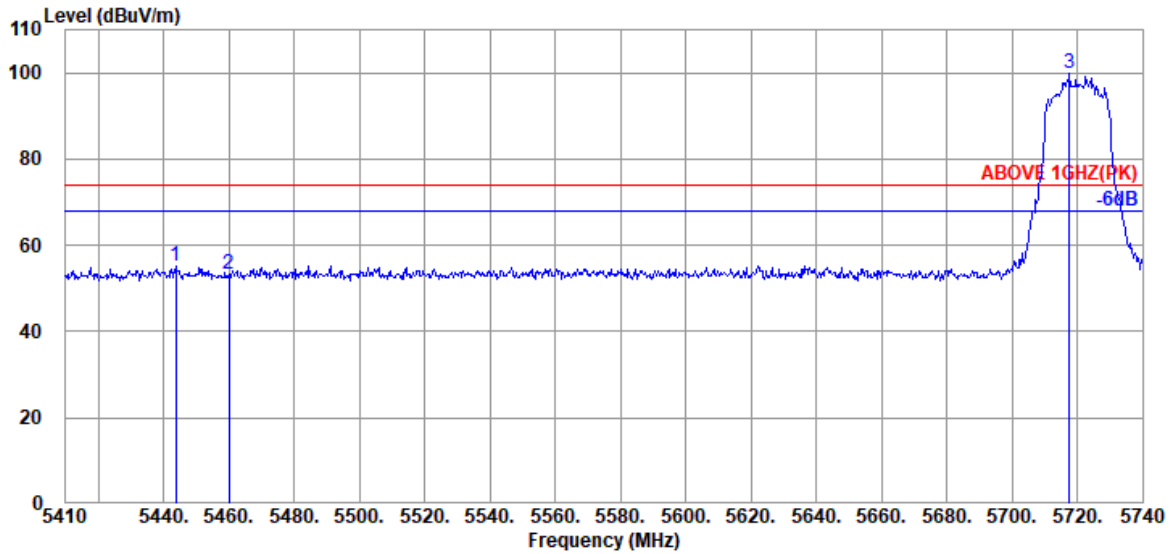

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.660	34.17	9.04	39.26	51.22	55.17	74.00	18.83	Peak
5460.160	34.20	9.05	39.26	49.41	53.40	74.00	20.60	Peak
@ 5717.560	33.80	9.19	39.30	96.27	99.96	---	---	Peak

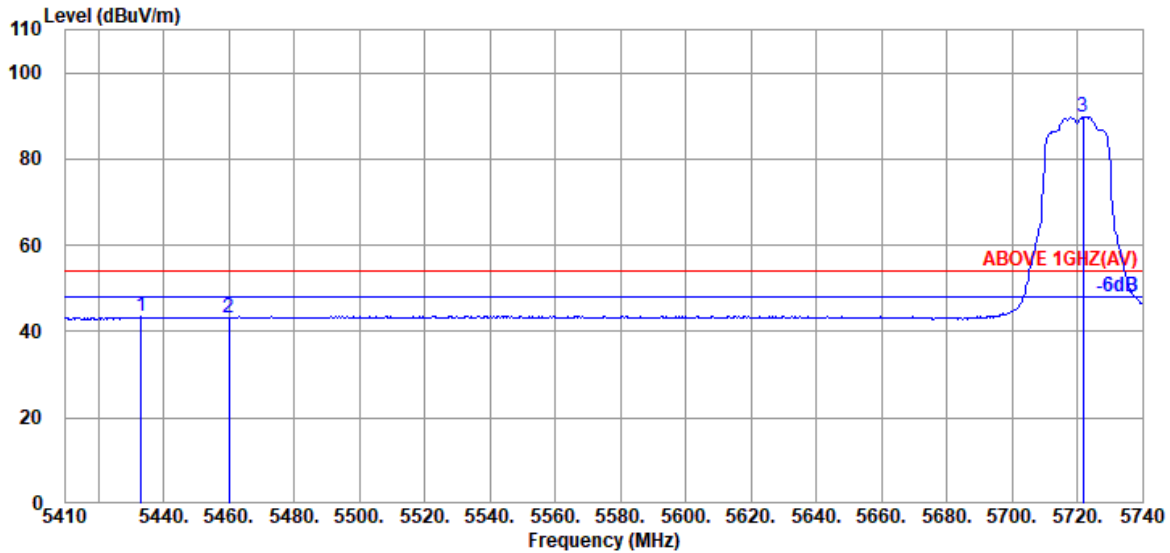


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.100	34.17	9.04	39.27	39.51	43.45	54.00	10.55	Average
5460.160	34.20	9.05	39.26	39.12	43.11	54.00	10.89	Average
@ 5721.850	33.80	9.19	39.30	86.05	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

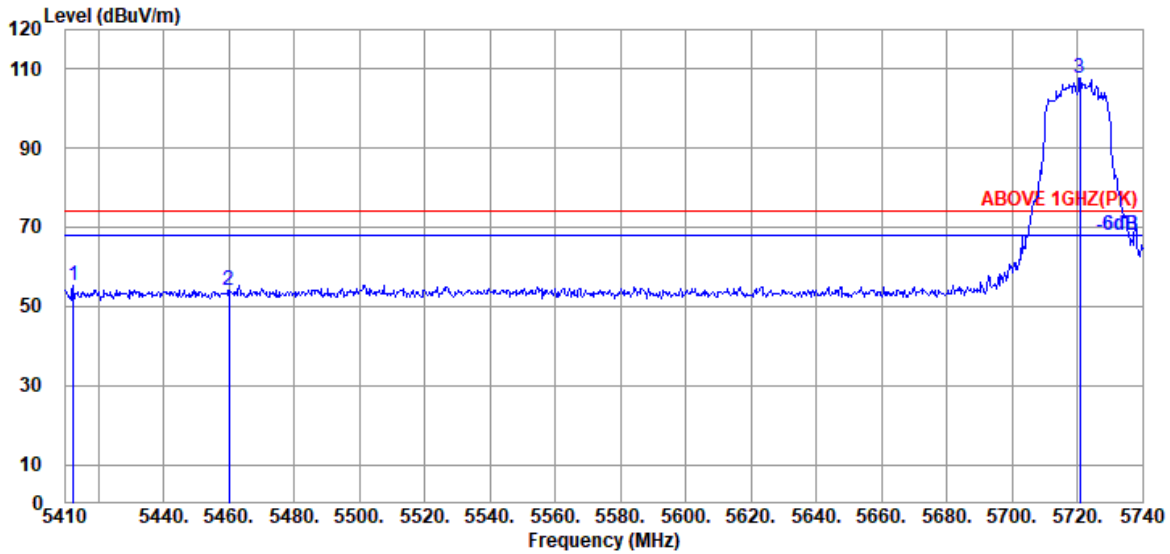

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.310	34.12	9.03	39.27	51.35	55.23	74.00	18.77	Peak
5460.160	34.20	9.05	39.26	50.07	54.06	74.00	19.94	Peak
@ 5720.860	33.80	9.19	39.30	104.20	107.89	---	---	Peak

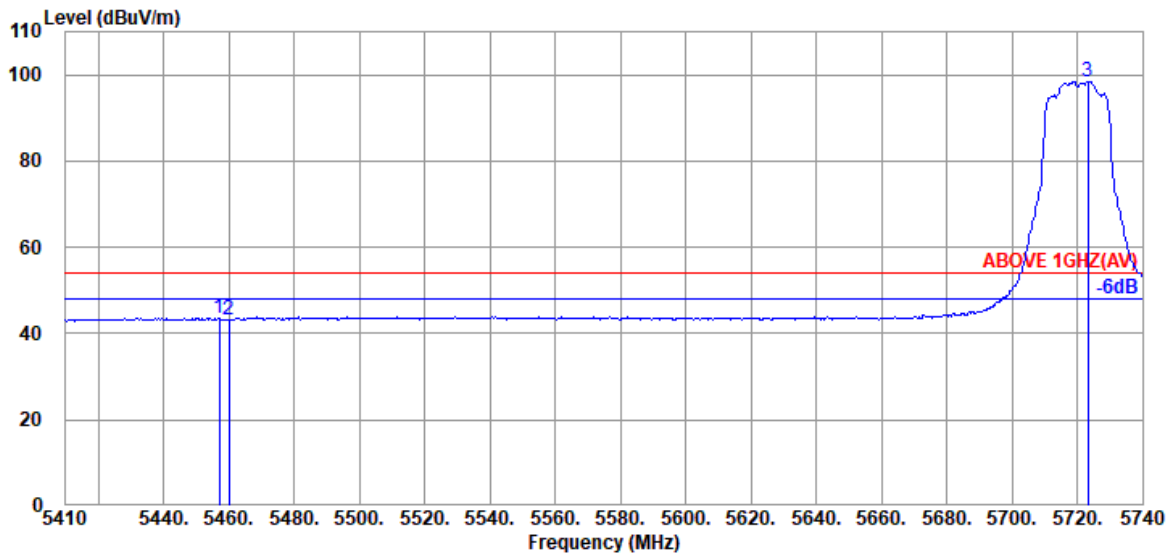


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.20	9.05	39.26	39.55	43.54	54.00	10.46	Average
5460.160	34.20	9.05	39.26	39.28	43.27	54.00	10.73	Average
@ 5723.170	33.80	9.20	39.30	94.77	98.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

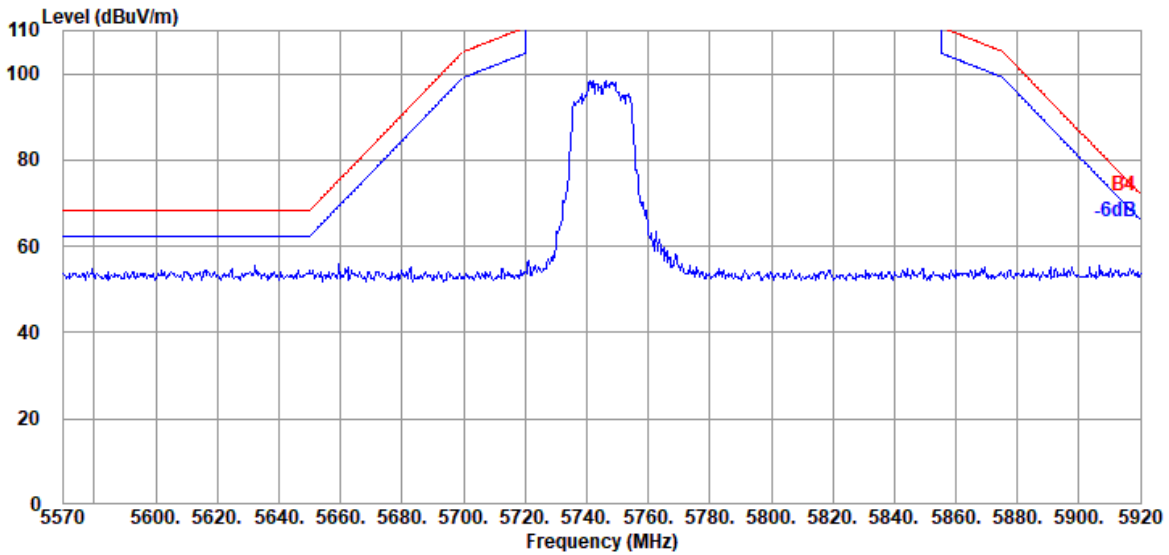


Antenna at Vertical Polarization

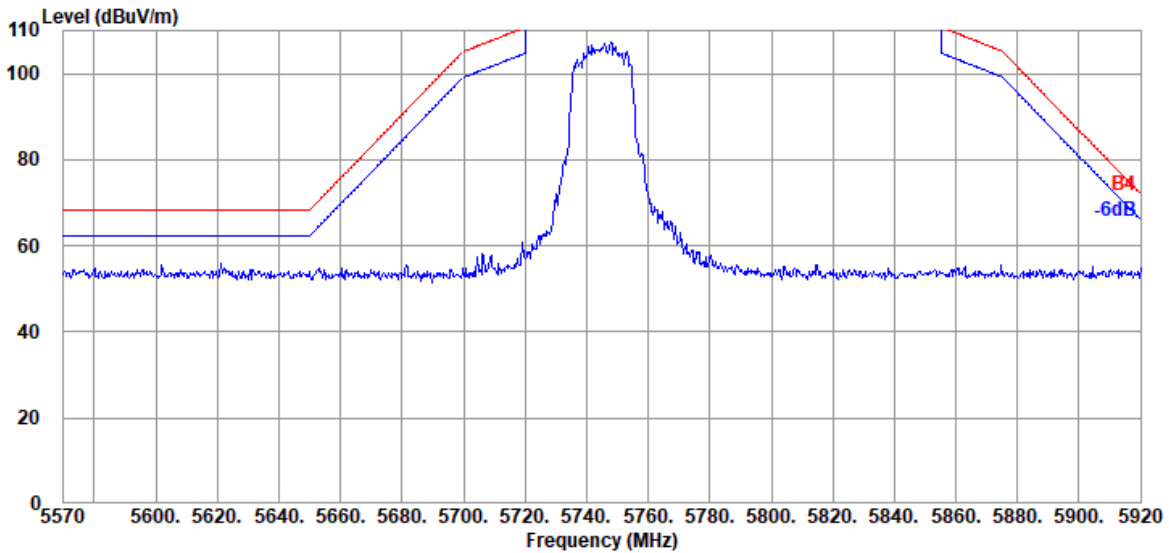


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

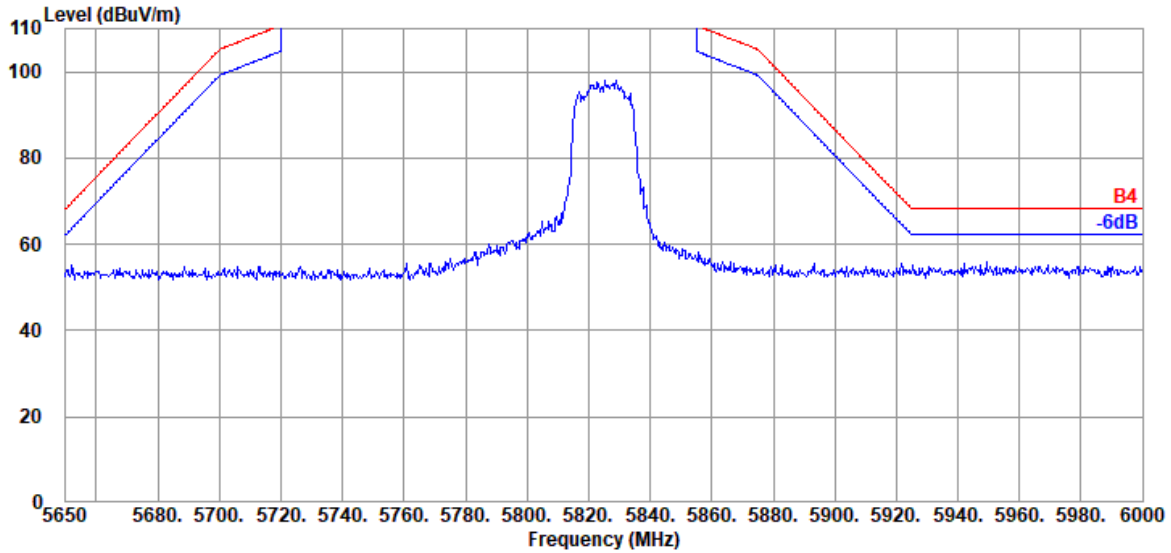

Antenna at Vertical Polarization

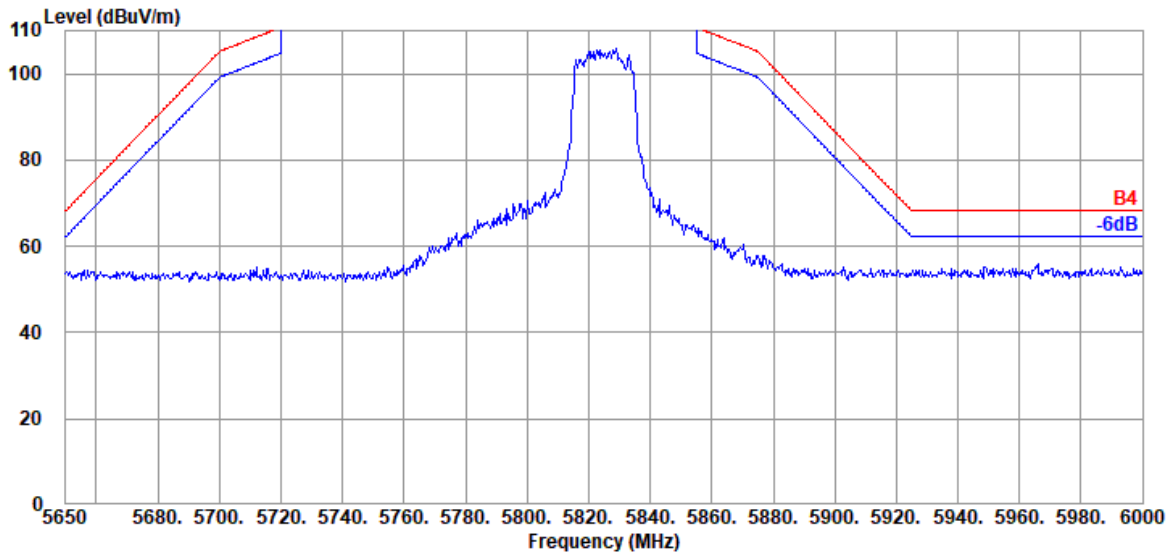


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

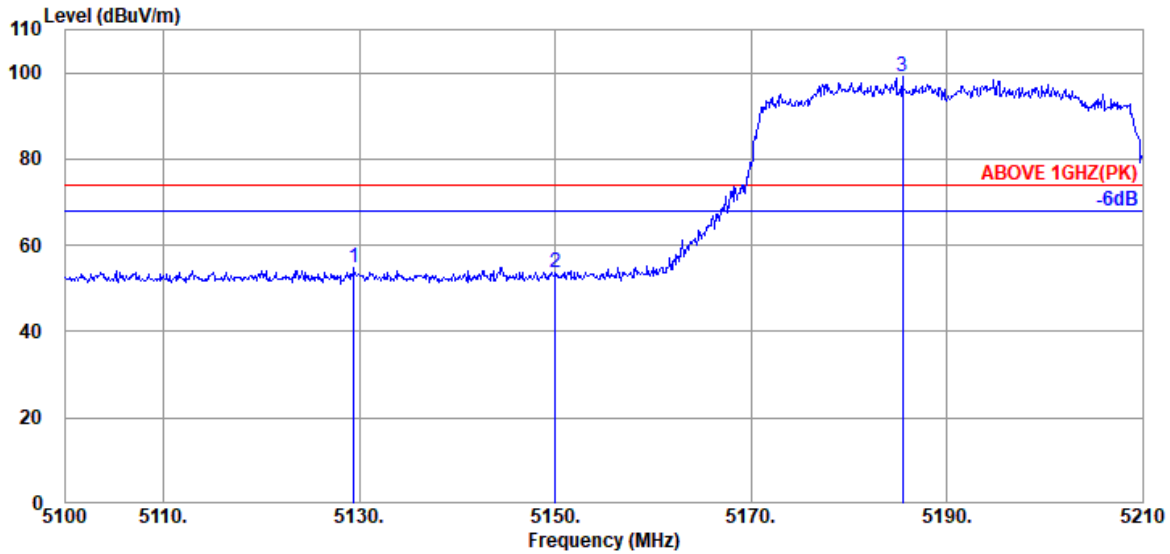

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.480	33.70	8.88	39.29	51.63	54.92	74.00	19.08	Peak
5150.050	33.70	8.88	39.29	50.23	53.52	74.00	20.48	Peak
@ 5185.470	33.70	8.90	39.28	95.93	99.25	---	---	Peak

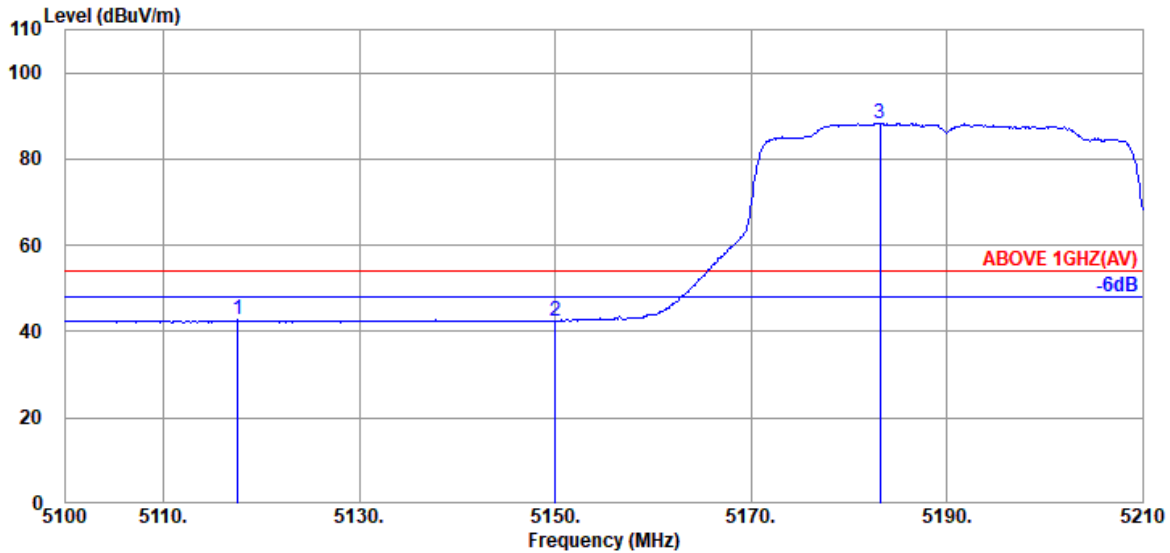


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.600	33.70	8.87	39.29	39.38	42.66	54.00	11.34	Average
5150.050	33.70	8.88	39.29	39.19	42.48	54.00	11.52	Average
@ 5183.160	33.70	8.90	39.28	84.91	88.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

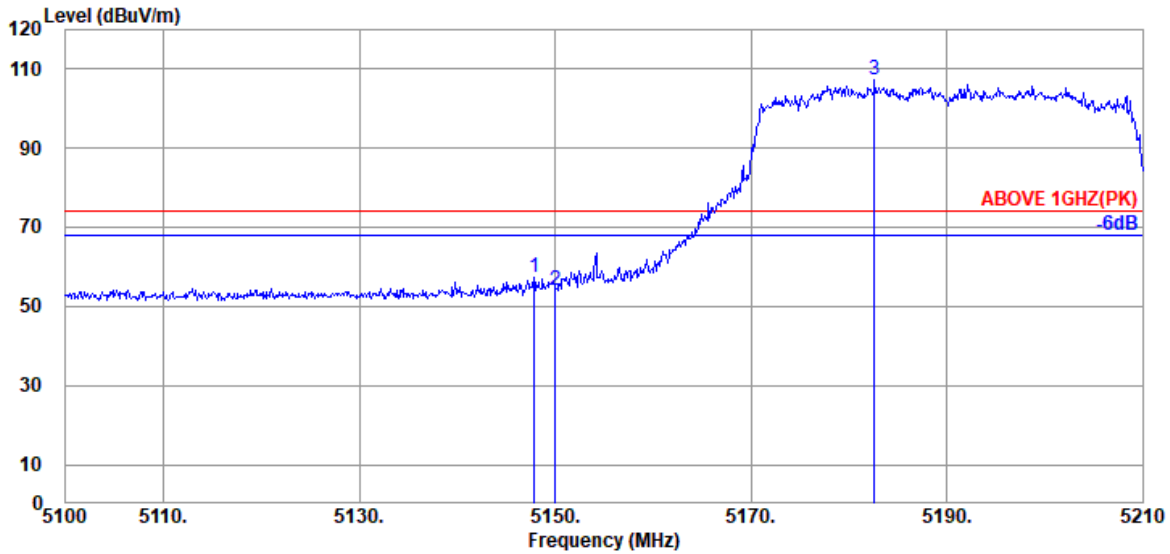

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	33.70	8.88	39.29	53.89	57.18	74.00	16.82	Peak
5150.050	33.70	8.88	39.29	50.59	53.88	74.00	20.12	Peak
@ 5182.610	33.70	8.90	39.28	104.04	107.36	---	---	Peak

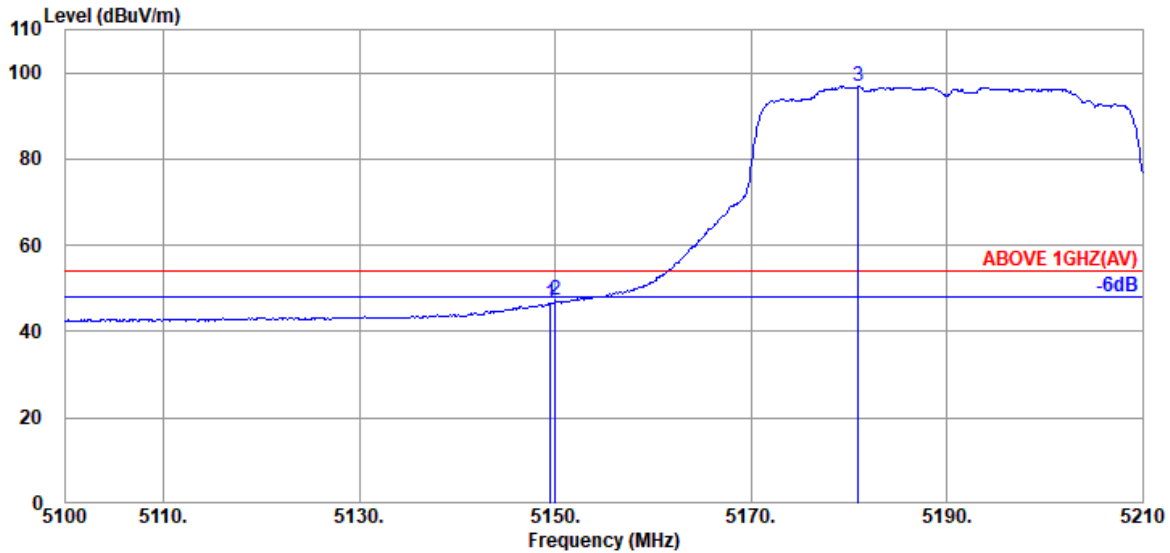


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	43.38	46.67	54.00	7.33	Average
5150.050	33.70	8.88	39.29	43.83	47.12	54.00	6.88	Average
@ 5180.960	33.70	8.90	39.28	93.41	96.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

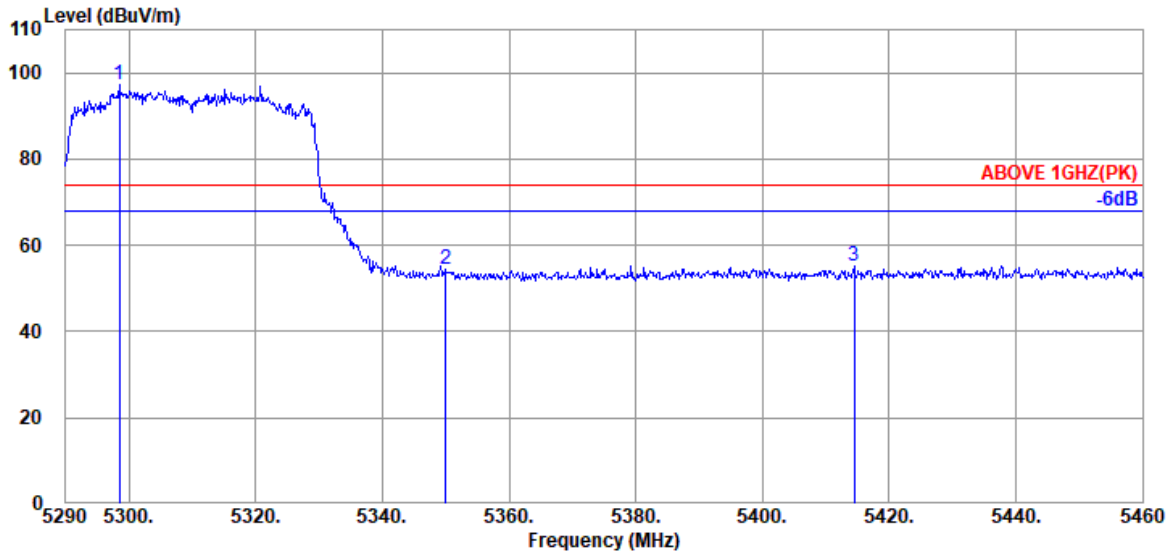

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.500	34.10	8.97	39.28	93.42	97.21	---	---	Peak
5350.010	33.90	8.99	39.27	50.72	54.34	74.00	19.66	Peak
5414.440	34.12	9.03	39.27	51.26	55.14	74.00	18.86	Peak

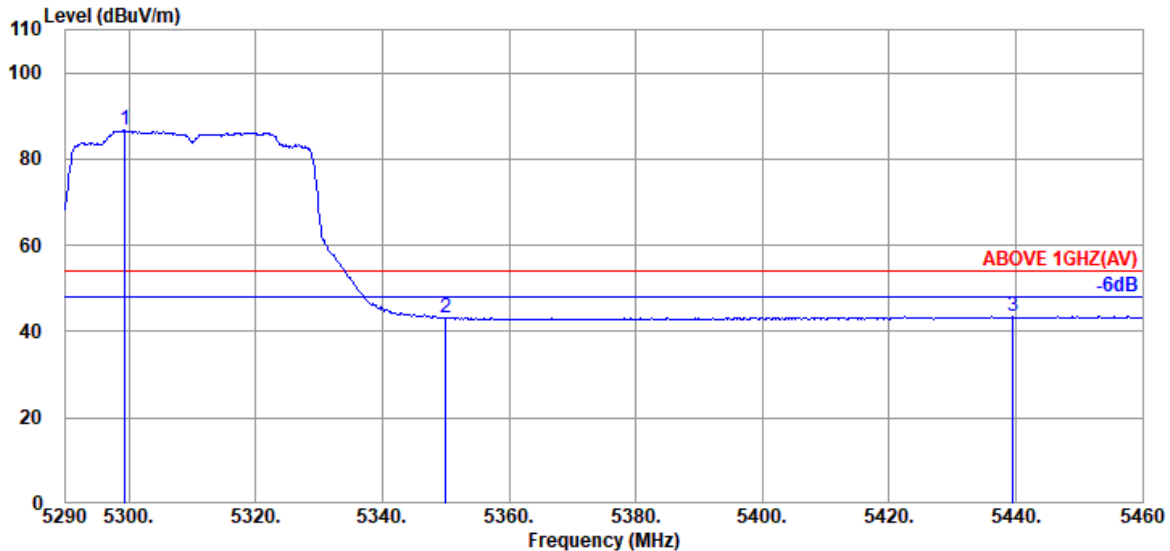


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.350	34.10	8.97	39.28	82.77	86.56	---	---	Average
5350.010	33.90	8.99	39.27	39.70	43.32	54.00	10.68	Average
5439.600	34.17	9.04	39.26	39.67	43.62	54.00	10.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

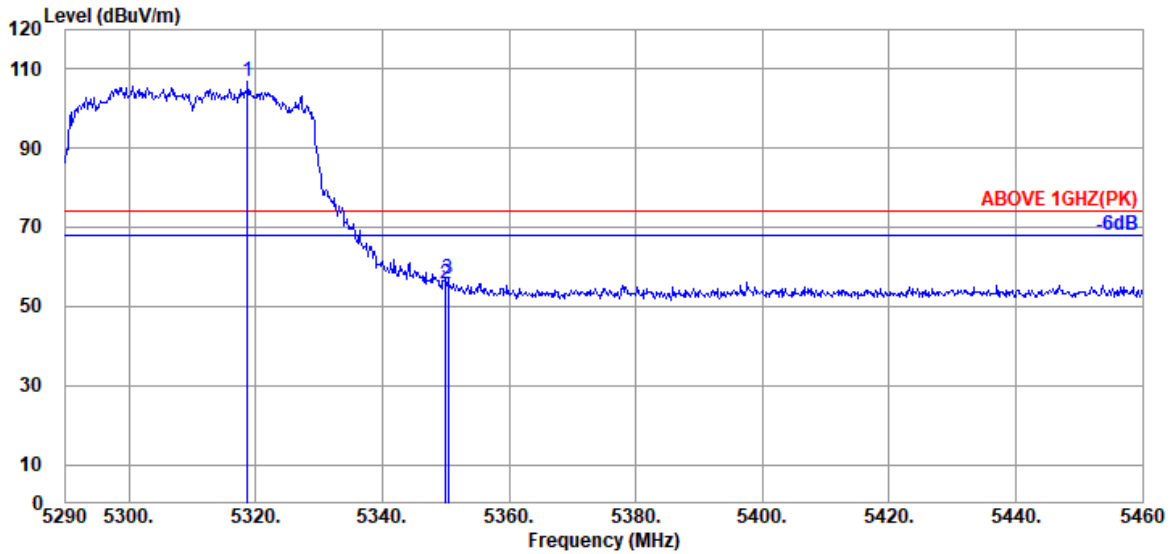

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.730	34.03	8.98	39.27	103.24	106.98	---	---	Peak
5350.010	33.90	8.99	39.27	51.94	55.56	74.00	18.44	Peak
5350.350	33.90	8.99	39.27	53.44	57.06	74.00	16.94	Peak

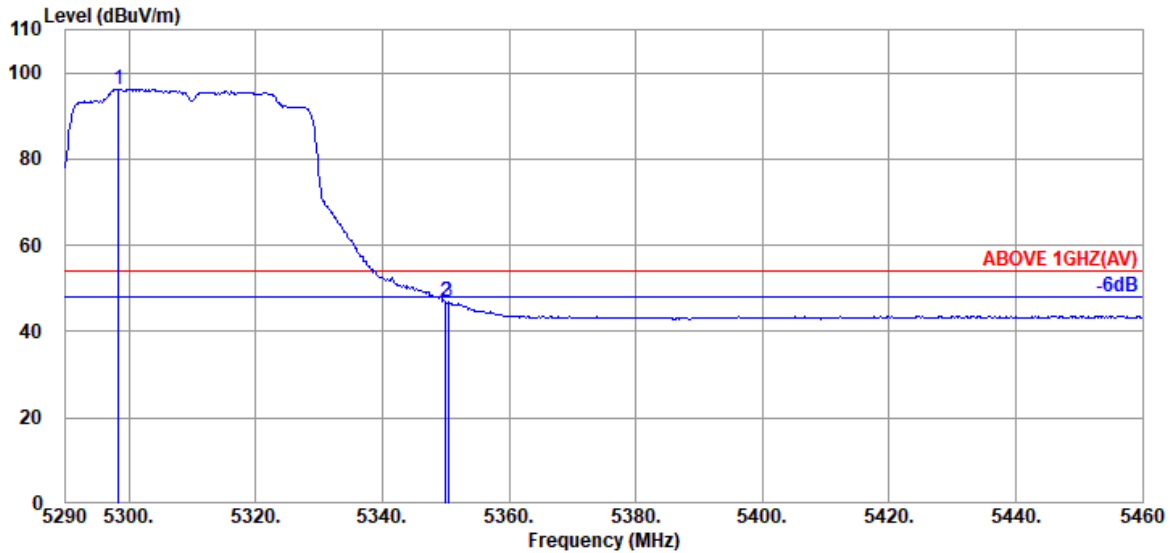


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.330	34.10	8.97	39.28	92.45	96.24	---	---	Average
5350.010	33.90	8.99	39.27	43.14	46.76	54.00	7.24	Average
5350.350	33.90	8.99	39.27	43.38	47.00	54.00	7.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

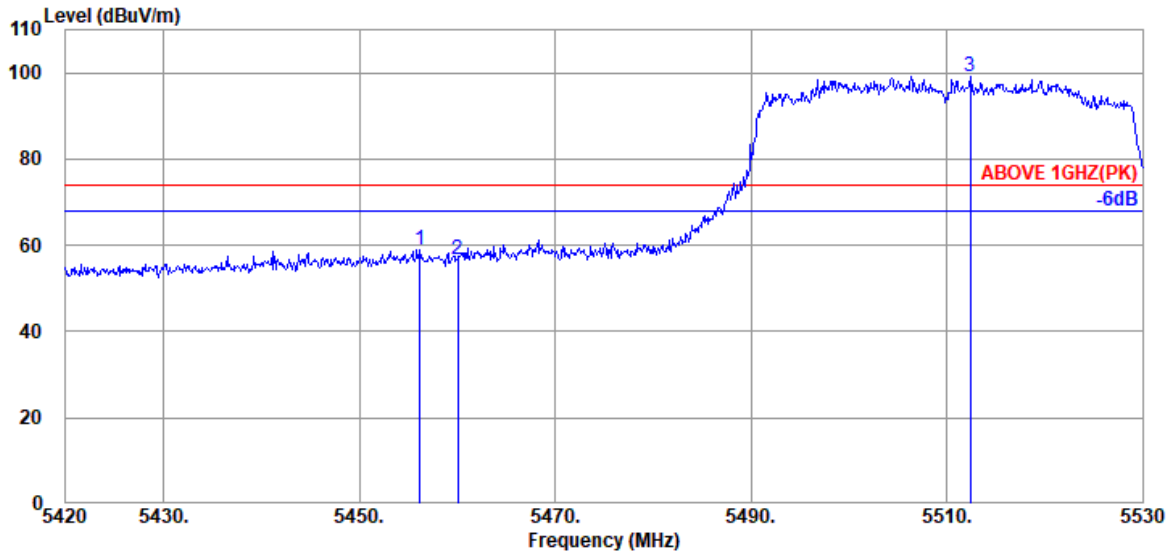

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.190	34.20	9.05	39.26	55.00	58.99	74.00	15.01	Peak
5460.040	34.20	9.05	39.26	52.59	56.58	74.00	17.42	Peak
@ 5512.400	34.10	9.09	39.26	95.04	98.97	---	---	Peak

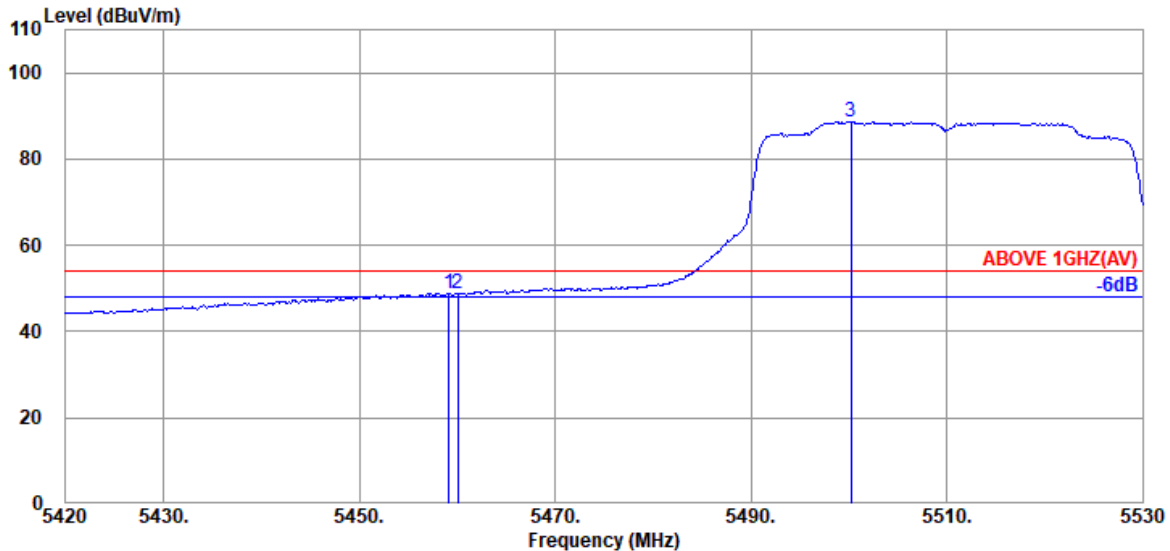


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.160	34.20	9.05	39.26	44.87	48.86	54.00	5.14	Average
5460.040	34.20	9.05	39.26	44.64	48.63	54.00	5.37	Average
@ 5500.190	34.10	9.08	39.26	84.76	88.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

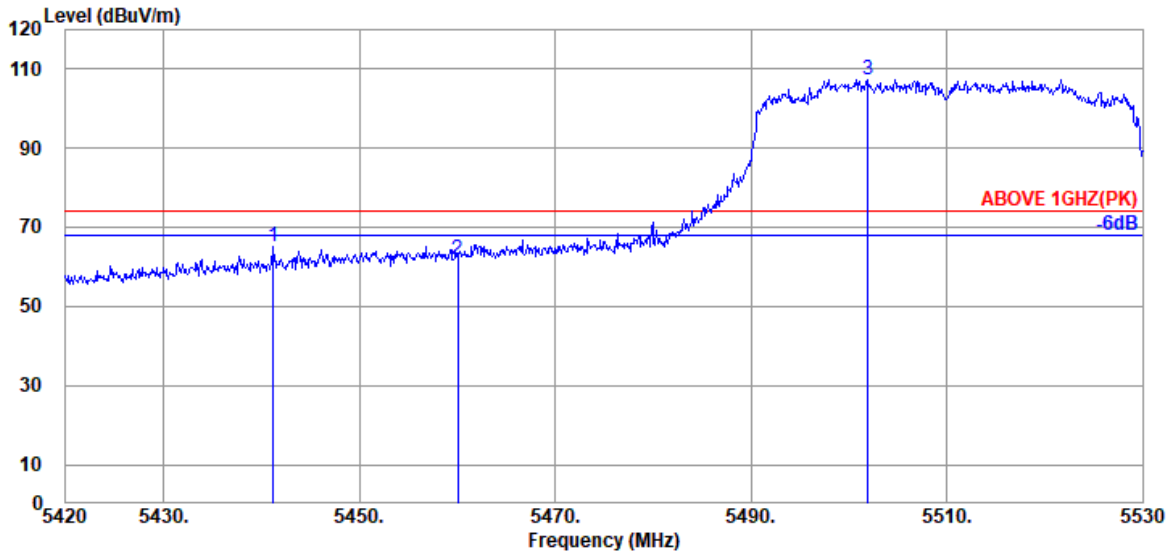

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.230	34.17	9.04	39.26	61.35	65.30	74.00	8.70	Peak
5460.040	34.20	9.05	39.26	57.94	61.93	74.00	12.07	Peak
@ 5501.950	34.10	9.08	39.26	103.56	107.48	---	---	Peak

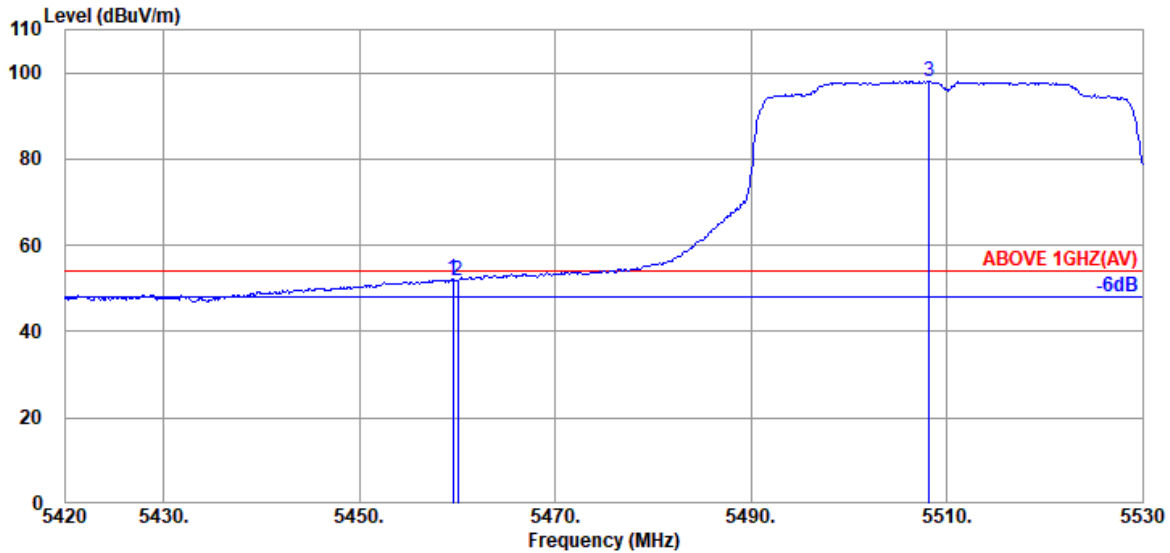


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	48.14	52.13	54.00	1.87	Average
5460.040	34.20	9.05	39.26	47.90	51.89	54.00	2.11	Average
@ 5508.220	34.10	9.08	39.26	94.04	97.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

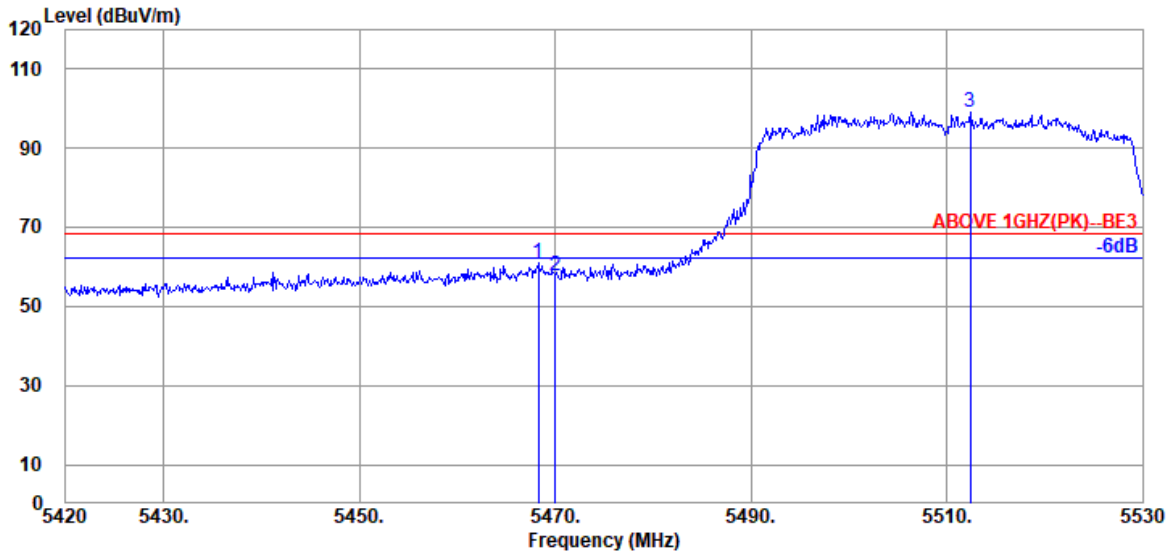

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.290	34.17	9.06	39.26	57.07	61.04	68.20	7.16	Peak
5470.050	34.17	9.06	39.26	53.64	57.61	68.20	10.59	Peak
5512.400	34.10	9.09	39.26	95.04	98.97	---	---	Peak

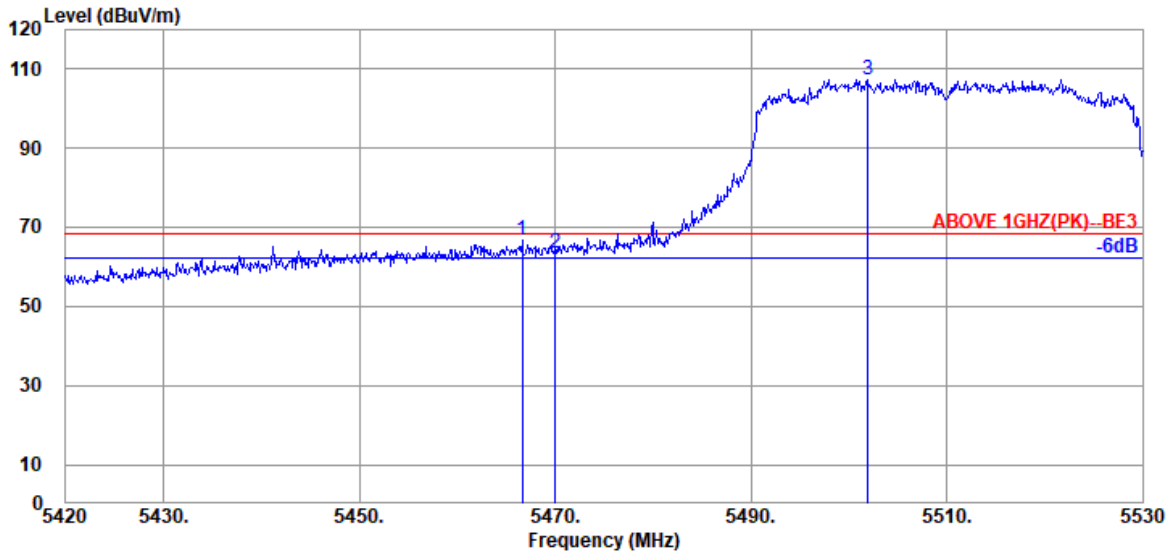


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5466.640	34.17	9.06	39.26	62.73	66.70	68.20	1.50	Peak
5470.050	34.17	9.06	39.26	59.58	63.55	68.20	4.65	Peak
5501.950	34.10	9.08	39.26	103.56	107.48	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

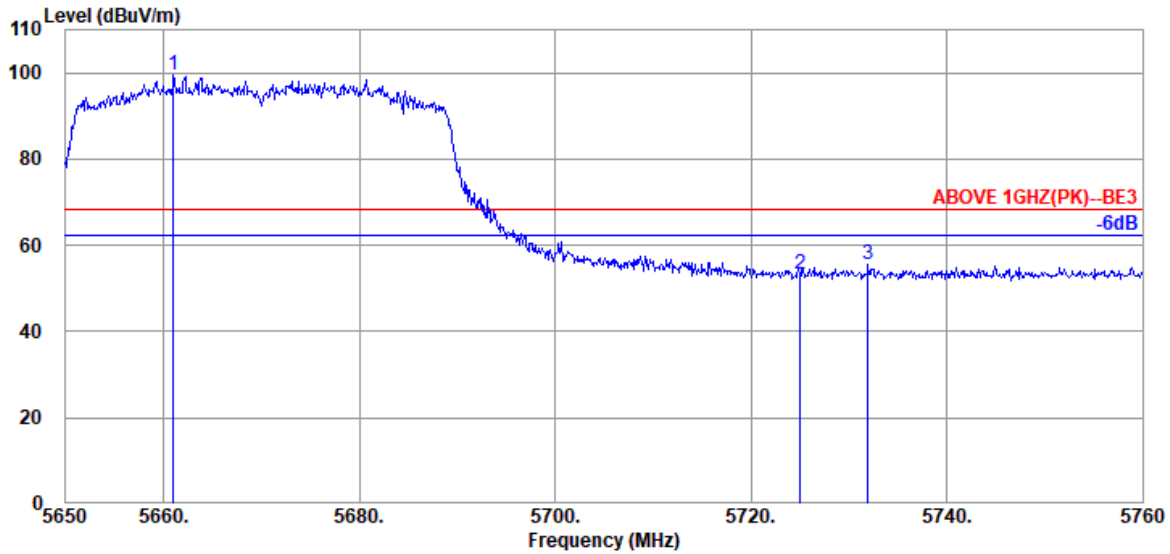

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.000	33.93	9.16	39.29	95.78	99.58	---	---	Peak
5725.020	33.80	9.20	39.30	49.60	53.30	68.20	14.90	Peak
5731.950	33.80	9.20	39.31	51.70	55.39	68.20	12.81	Peak

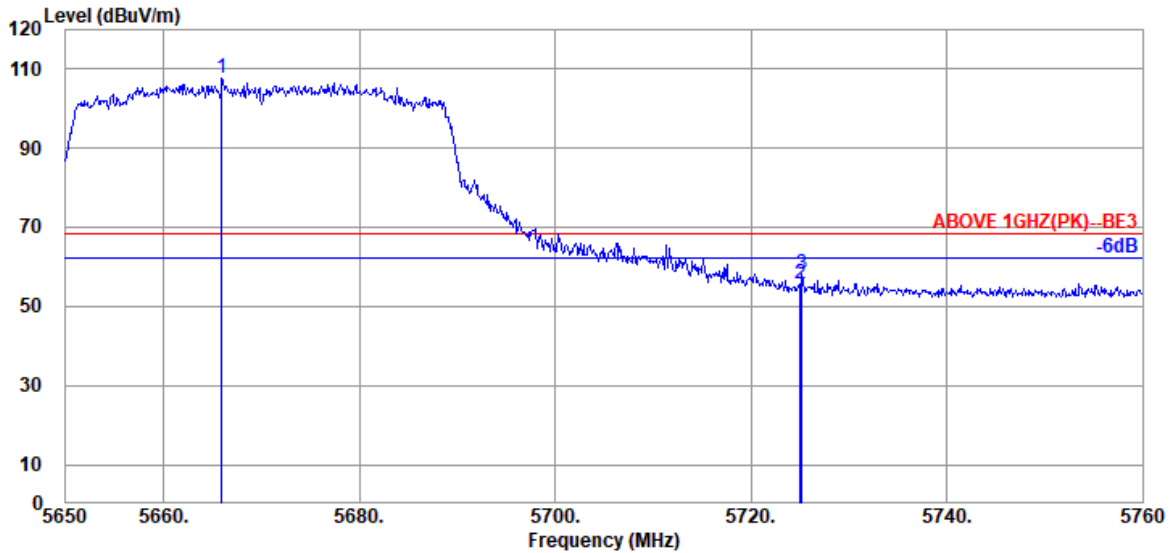


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.950	33.93	9.16	39.29	103.80	107.60	---	---	Peak
5725.020	33.80	9.20	39.30	52.00	55.70	68.20	12.50	Peak
5725.240	33.80	9.20	39.30	54.65	58.35	68.20	9.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

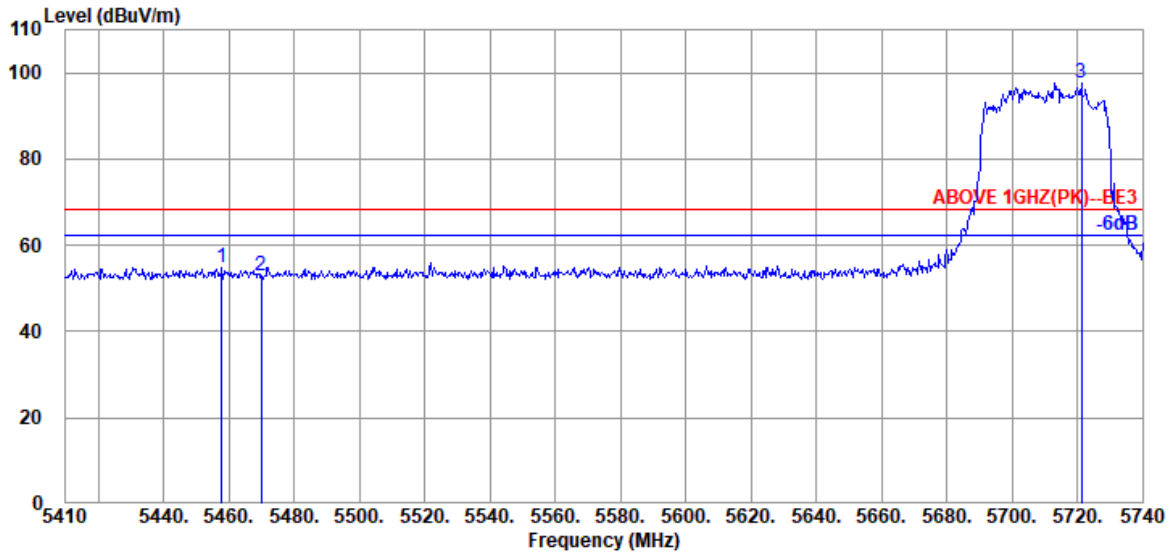

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5457.850	34.20	9.05	39.26	50.84	54.83	68.20	13.37	Peak
	5470.060	34.17	9.06	39.26	49.04	53.01	68.20	15.19	Peak
	5721.190	33.80	9.19	39.30	93.74	97.43	---	---	Peak

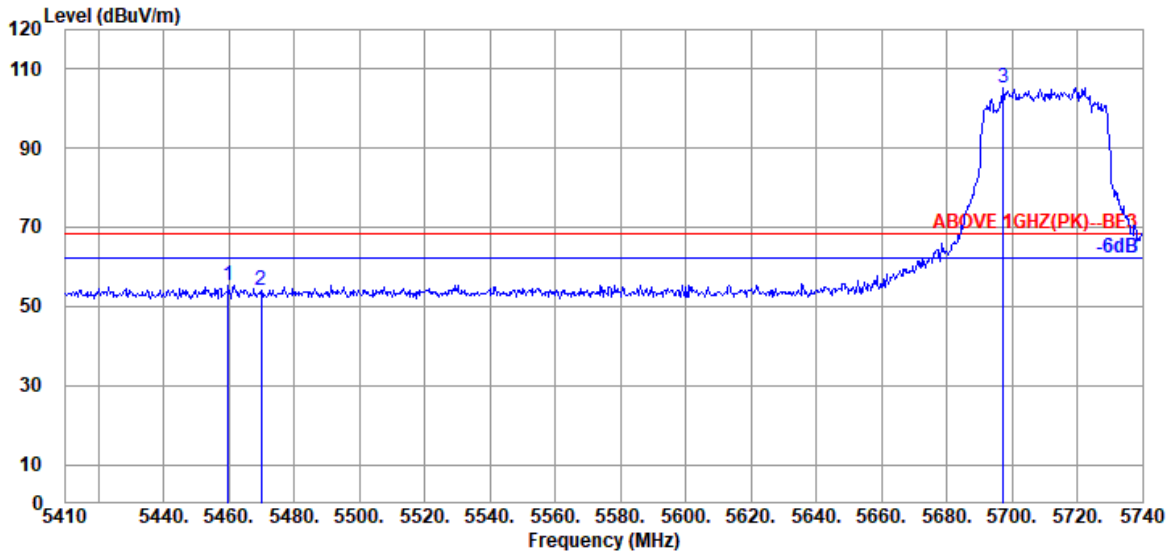

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5459.830	34.20	9.05	39.26	51.21	55.20	68.20	13.00	Peak
	5470.060	34.17	9.06	39.26	50.29	54.26	68.20	13.94	Peak
	5697.430	33.80	9.18	39.30	101.55	105.23	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

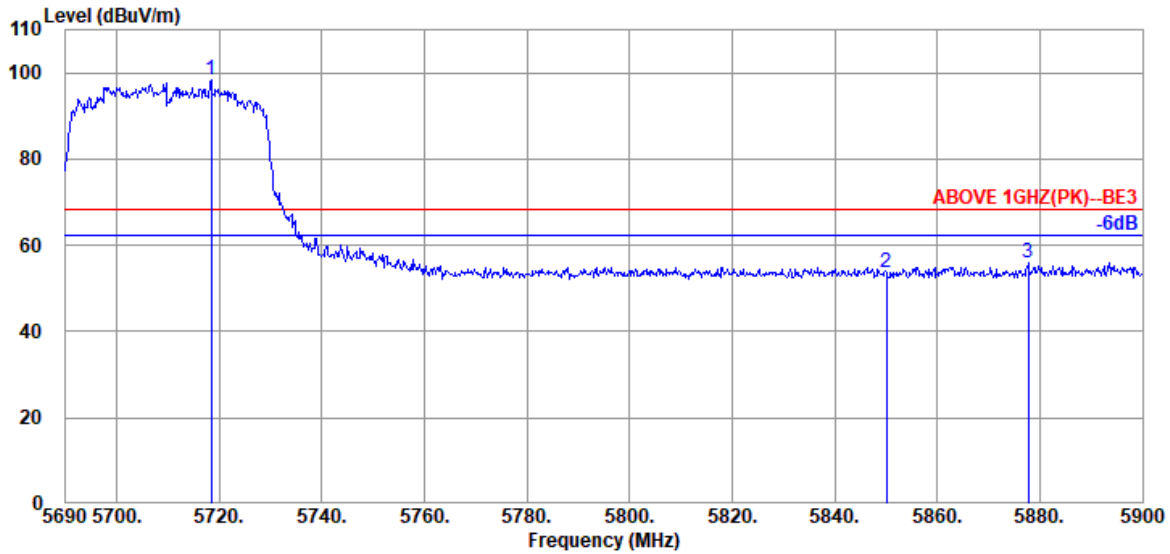

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.350	33.80	9.19	39.30	94.55	98.24	---	---	Peak
5850.020	34.10	9.25	39.33	49.64	53.66	68.20	14.54	Peak
5877.740	34.10	9.27	39.33	51.74	55.78	68.20	12.42	Peak

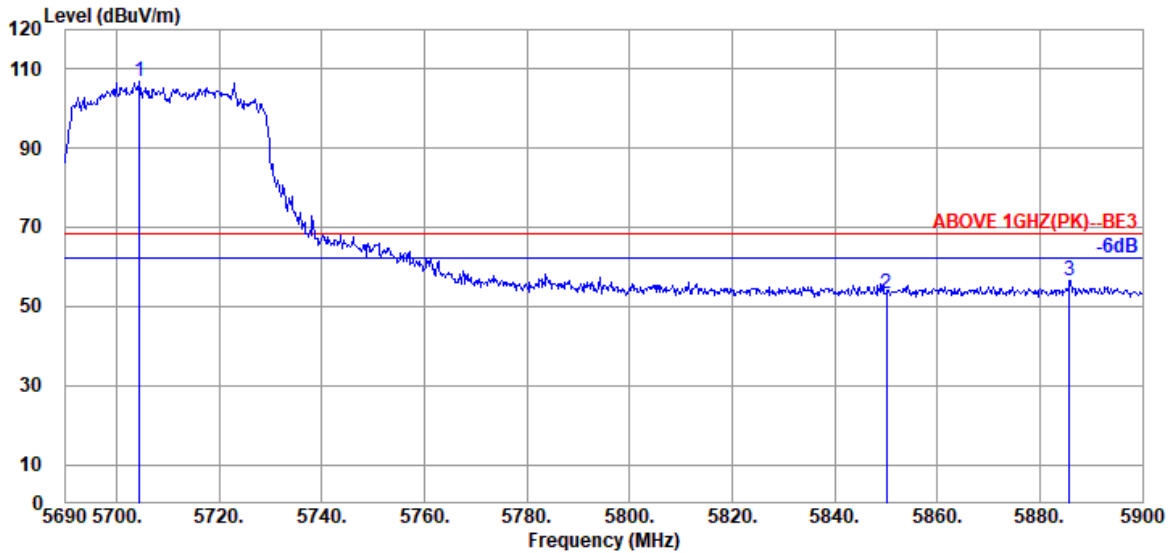


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.490	33.80	9.18	39.30	103.30	106.98	68.20	---	Peak
5850.020	34.10	9.25	39.33	49.29	53.31	68.20	14.89	Peak
5885.720	34.10	9.27	39.34	52.42	56.45	68.20	11.75	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

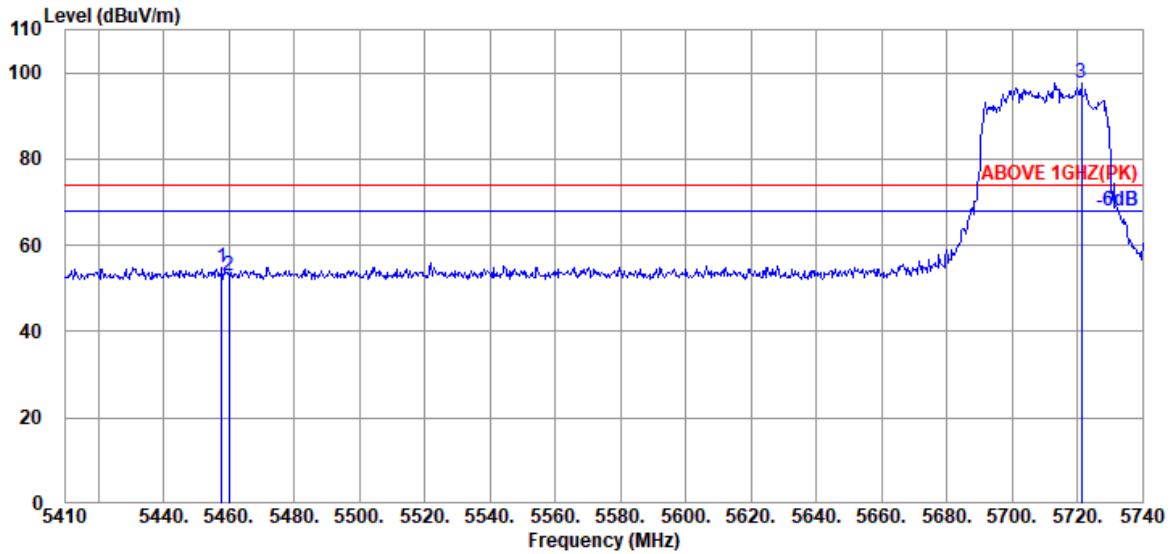

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.850	34.20	9.05	39.26	50.84	54.83	74.00	19.17	Peak
5460.160	34.20	9.05	39.26	49.00	52.99	74.00	21.01	Peak
@ 5721.190	33.80	9.19	39.30	93.74	97.43	---	---	Peak

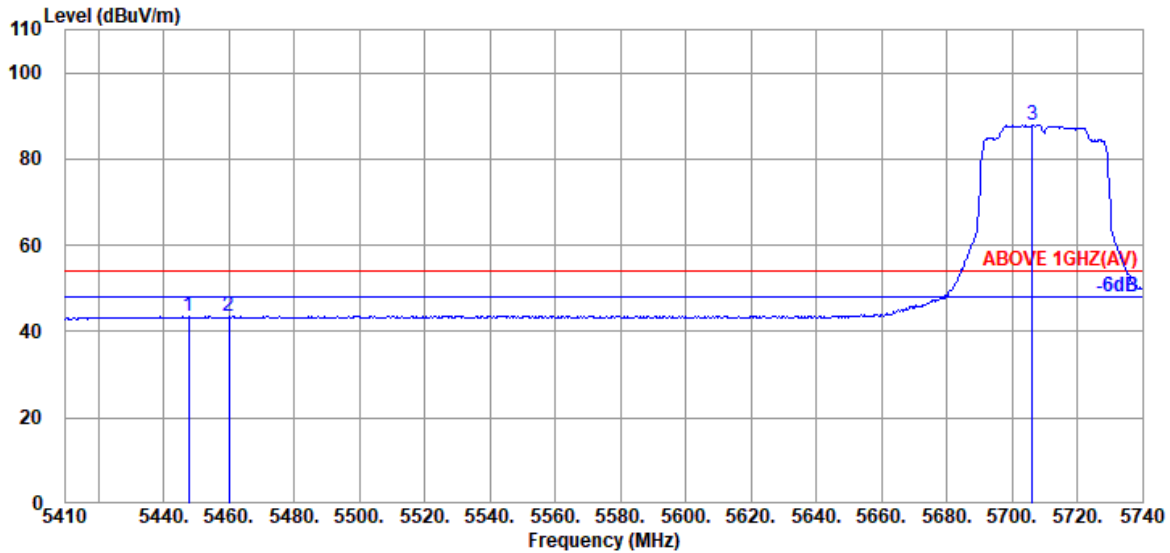


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.620	34.17	9.04	39.26	39.56	43.51	54.00	10.49	Average
5460.160	34.20	9.05	39.26	39.38	43.37	54.00	10.63	Average
@ 5706.340	33.80	9.19	39.30	84.34	88.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

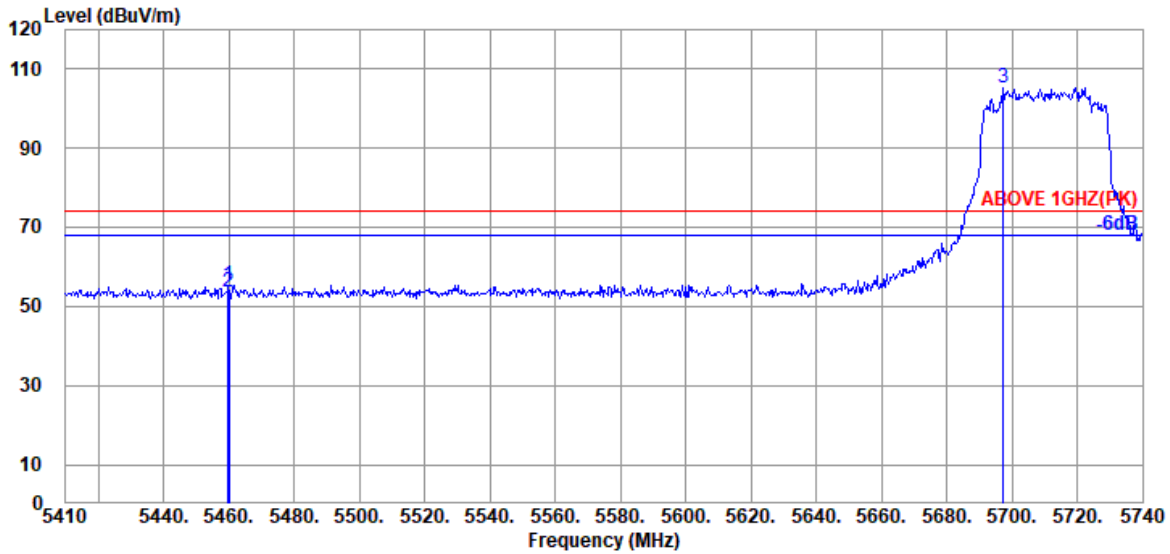

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.830	34.20	9.05	39.26	51.21	55.20	74.00	18.80	Peak
5460.160	34.20	9.05	39.26	49.55	53.54	74.00	20.46	Peak
@ 5697.430	33.80	9.18	39.30	101.55	105.23	---	---	Peak

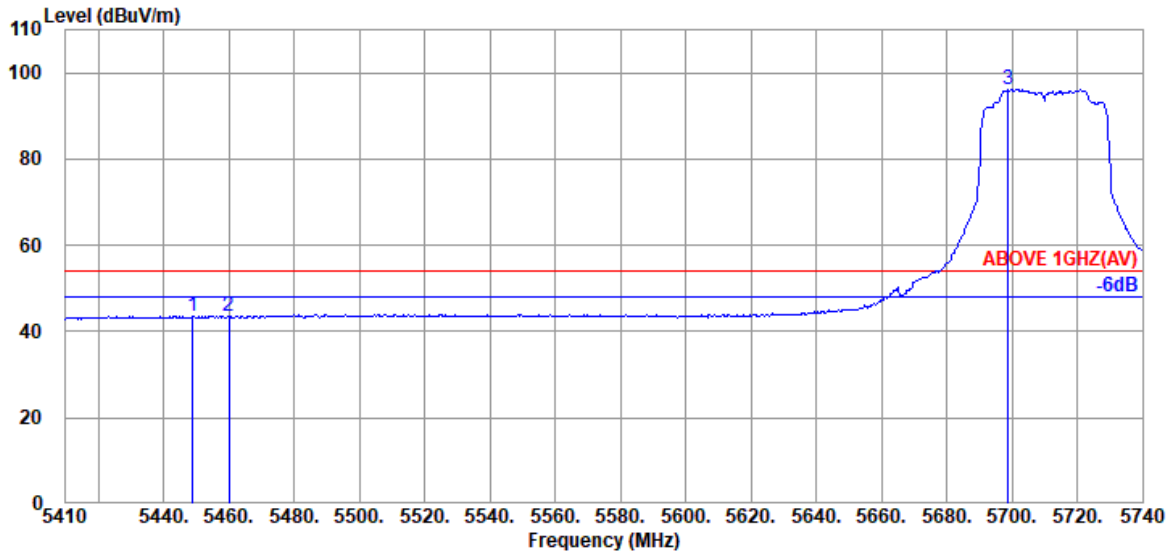


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.940	34.20	9.05	39.26	39.63	43.62	54.00	10.38	Average
5460.160	34.20	9.05	39.26	39.49	43.48	54.00	10.52	Average
@ 5698.750	33.80	9.18	39.30	92.43	96.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

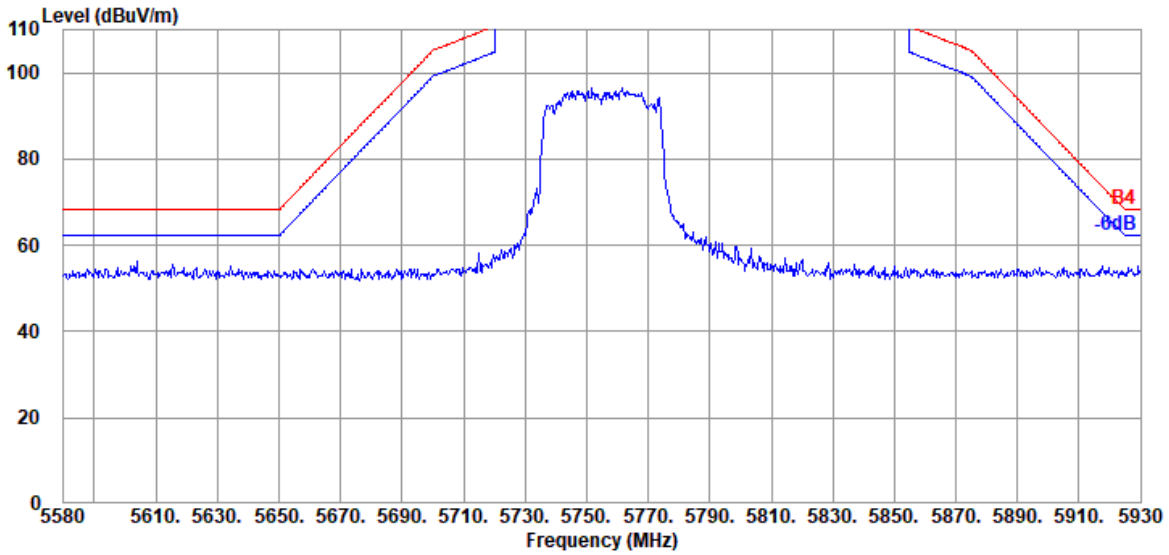


Antenna at Vertical Polarization

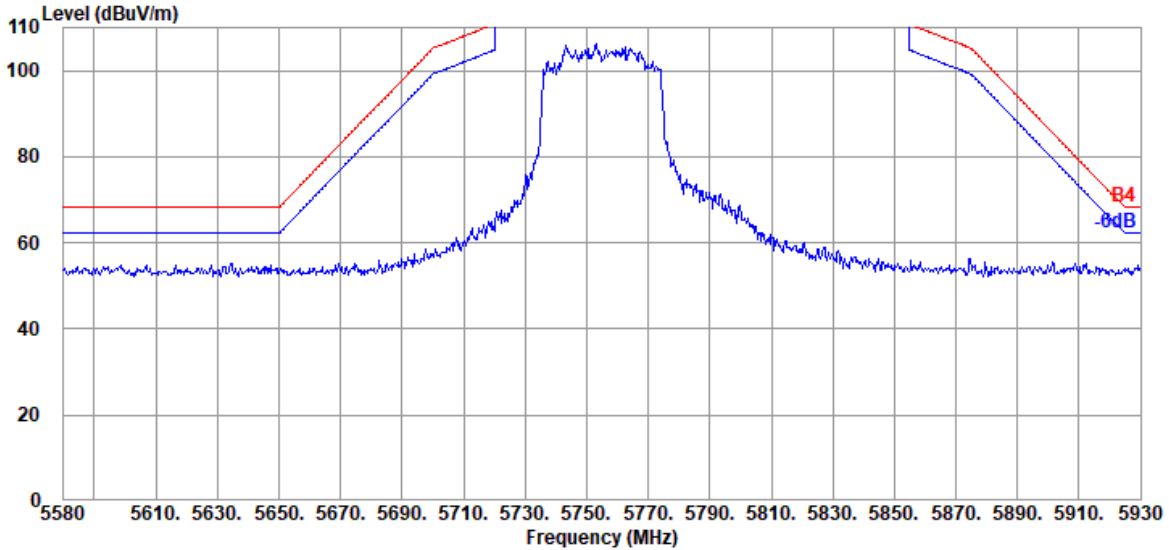


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

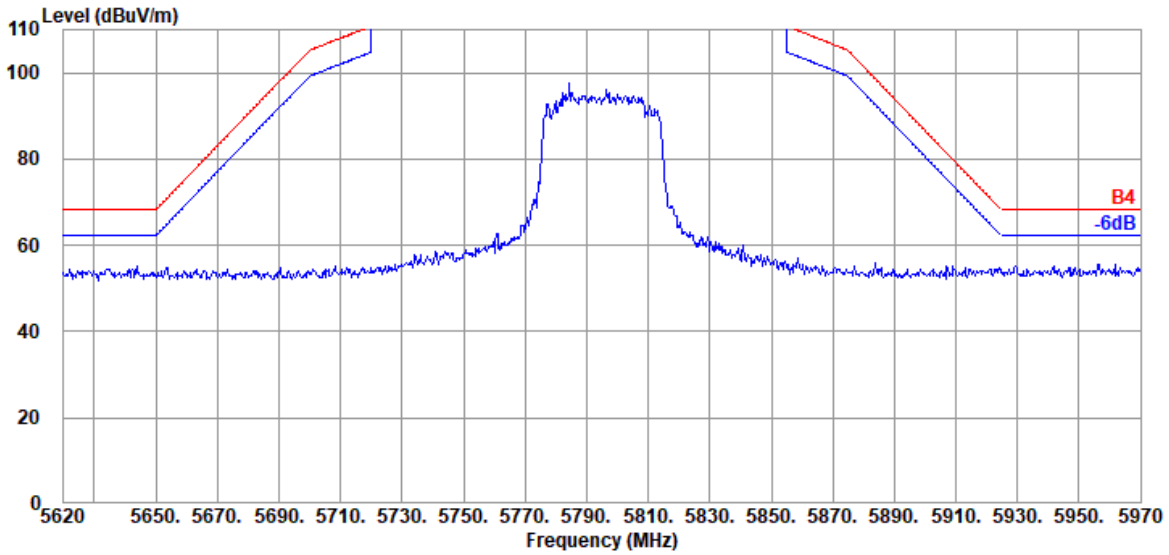

Antenna at Vertical Polarization

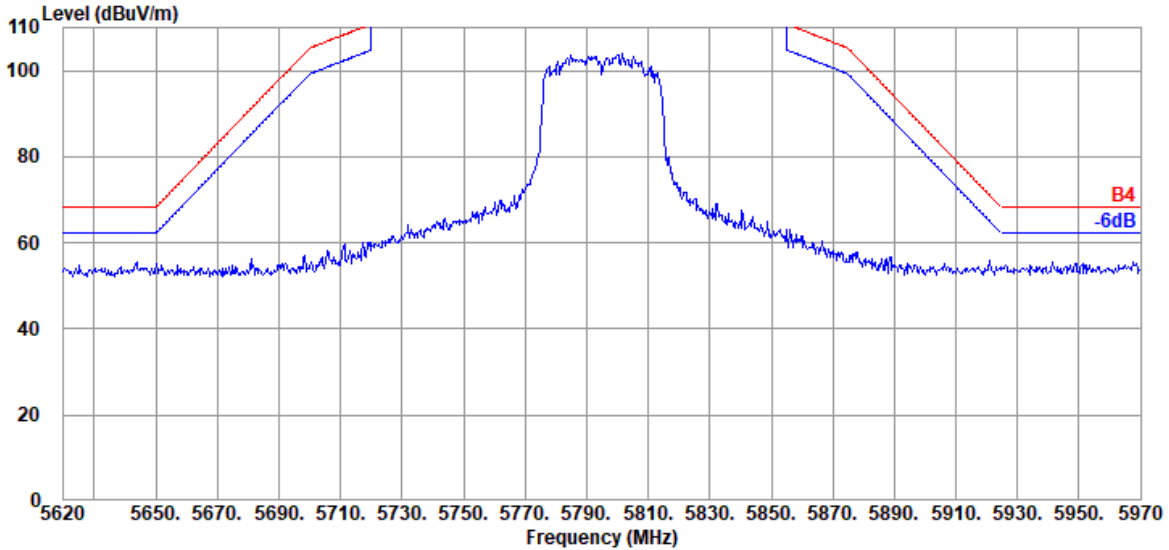


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

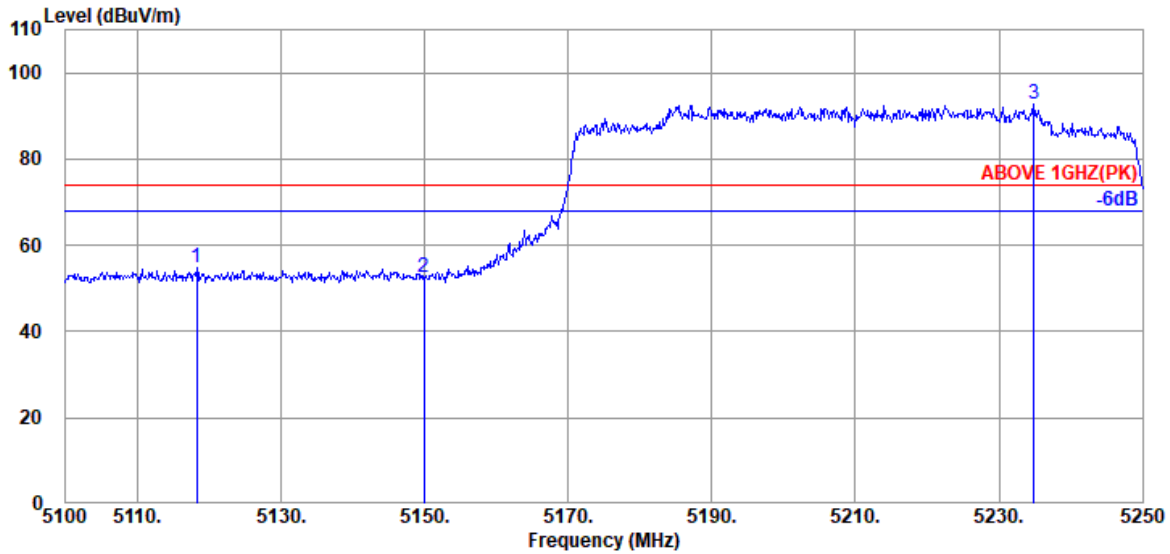

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.300	33.70	8.87	39.29	51.47	54.75	74.00	19.25	Peak
5149.950	33.70	8.88	39.29	49.08	52.37	74.00	21.63	Peak
@ 5234.850	33.78	8.93	39.28	89.30	92.73	---	---	Peak

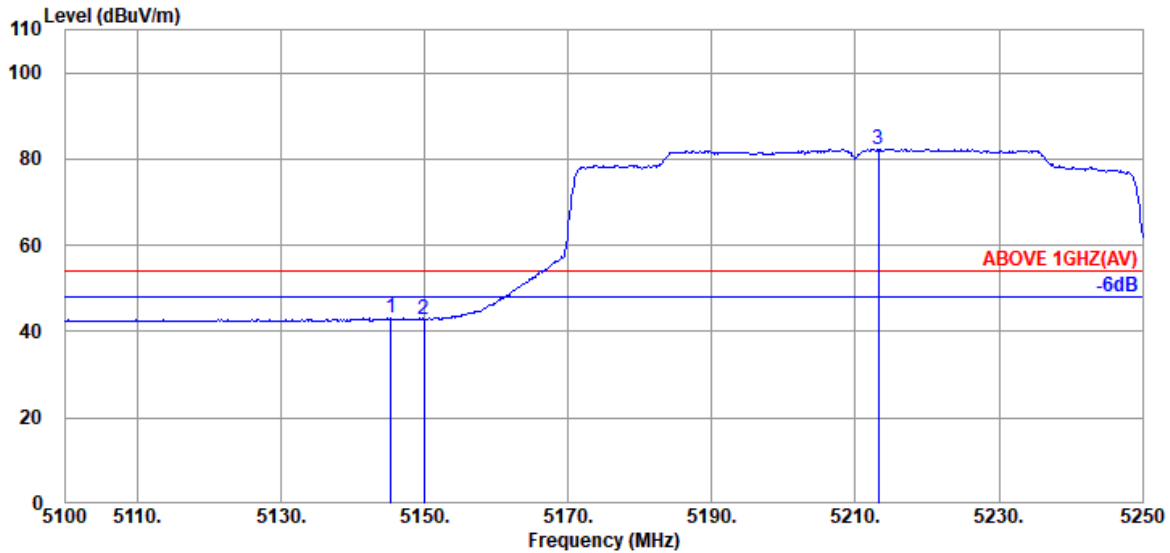


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.70	8.88	39.29	39.85	43.14	54.00	10.86	Average
5149.950	33.70	8.88	39.29	39.56	42.85	54.00	11.15	Average
@ 5213.250	33.72	8.92	39.28	79.03	82.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

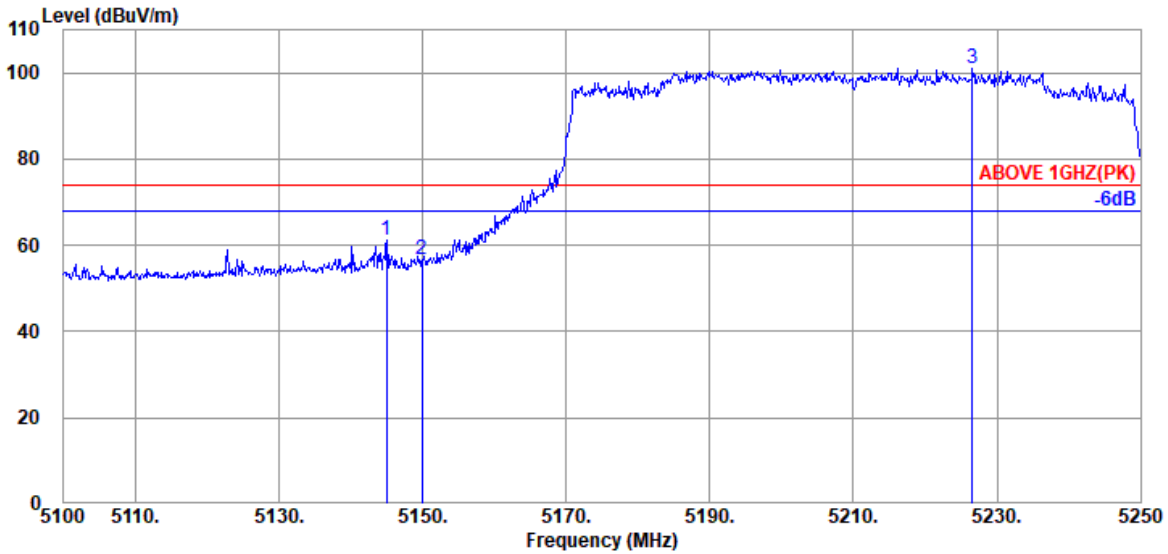

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.70	8.88	39.29	57.79	61.08	74.00	12.92	Peak
5149.950	33.70	8.88	39.29	53.43	56.72	74.00	17.28	Peak
@ 5226.600	33.75	8.93	39.28	97.74	101.14	---	---	Peak

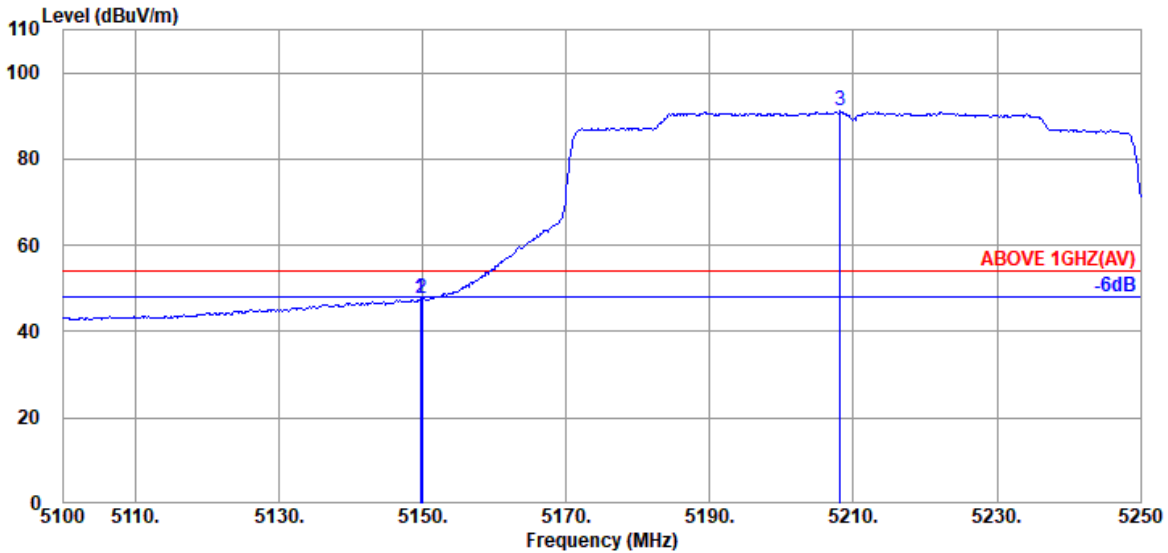


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	44.25	47.54	54.00	6.46	Average
5149.950	33.70	8.88	39.29	44.22	47.51	54.00	6.49	Average
@ 5208.150	33.72	8.92	39.28	87.71	91.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

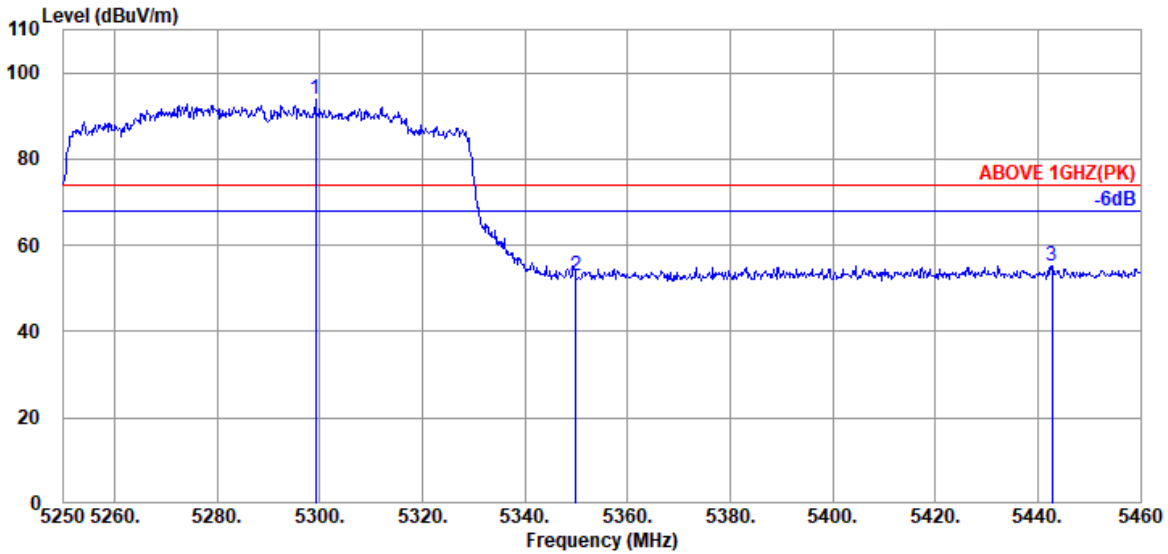

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.140	34.10	8.97	39.28	90.21	94.00	---	---	Peak
5349.960	33.90	8.99	39.27	49.27	52.89	74.00	21.11	Peak
5442.780	34.17	9.04	39.26	51.20	55.15	74.00	18.85	Peak

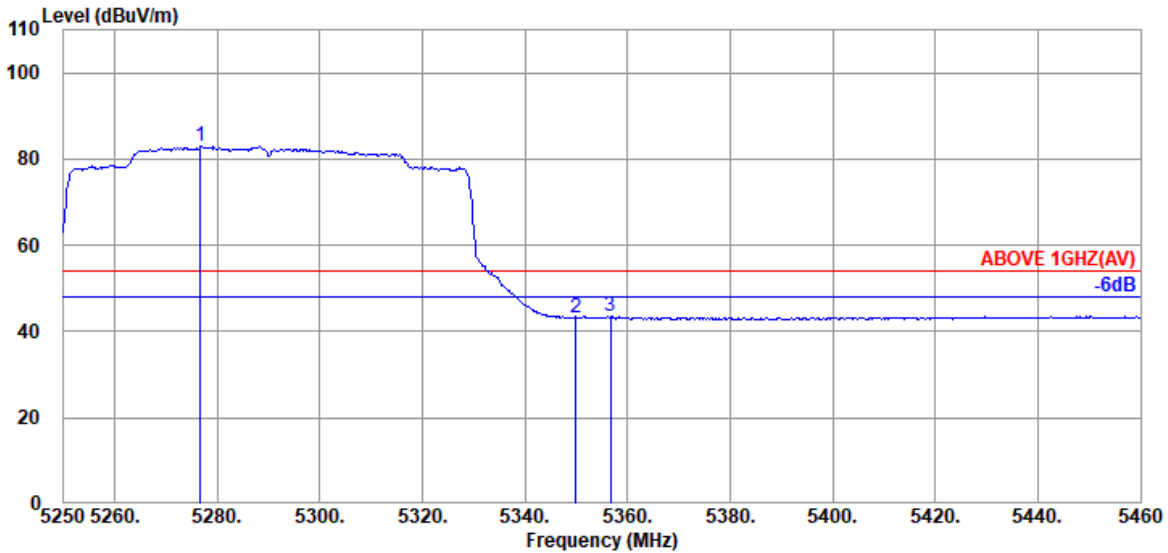


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.670	33.90	8.95	39.28	79.29	82.86	---	---	Average
5349.960	33.90	8.99	39.27	39.72	43.34	54.00	10.66	Average
5356.680	33.97	9.00	39.27	39.88	43.58	54.00	10.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

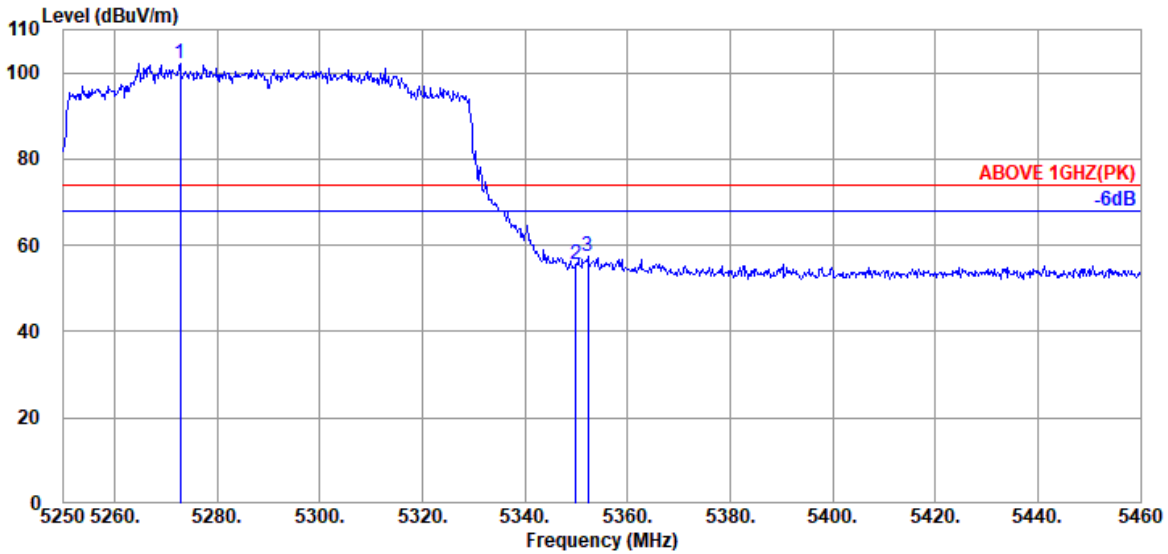

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.680	33.90	8.95	39.28	98.70	102.27	---	---	Peak
5349.960	33.90	8.99	39.27	52.00	55.62	74.00	18.38	Peak
5352.270	33.90	8.99	39.27	53.90	57.52	74.00	16.48	Peak

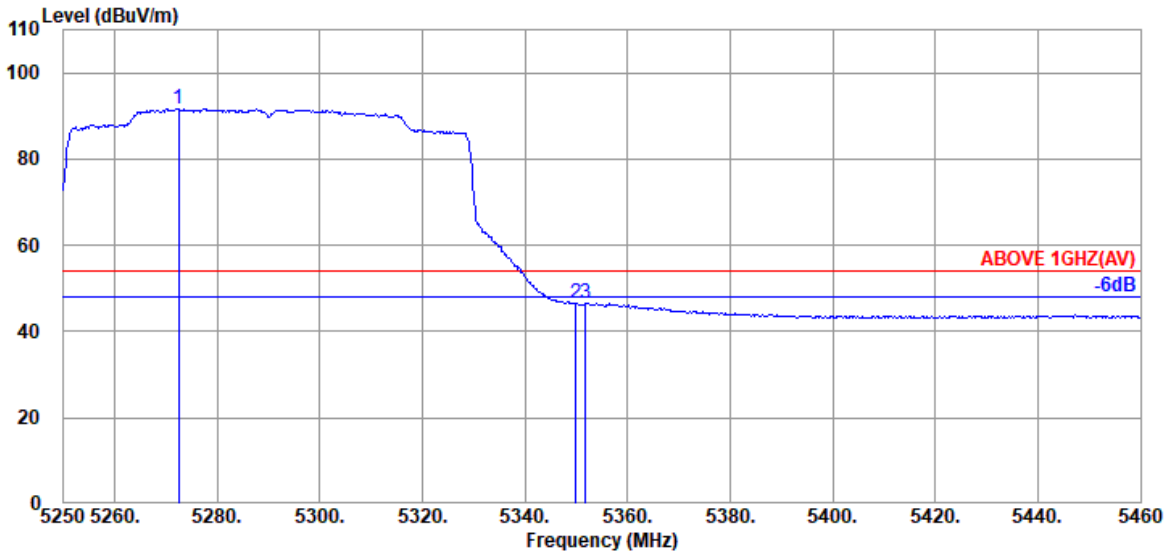


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.470	33.90	8.95	39.28	88.12	91.69	---	---	Average
5349.960	33.90	8.99	39.27	42.78	46.40	54.00	7.60	Average
5351.850	33.90	8.99	39.27	42.94	46.56	54.00	7.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

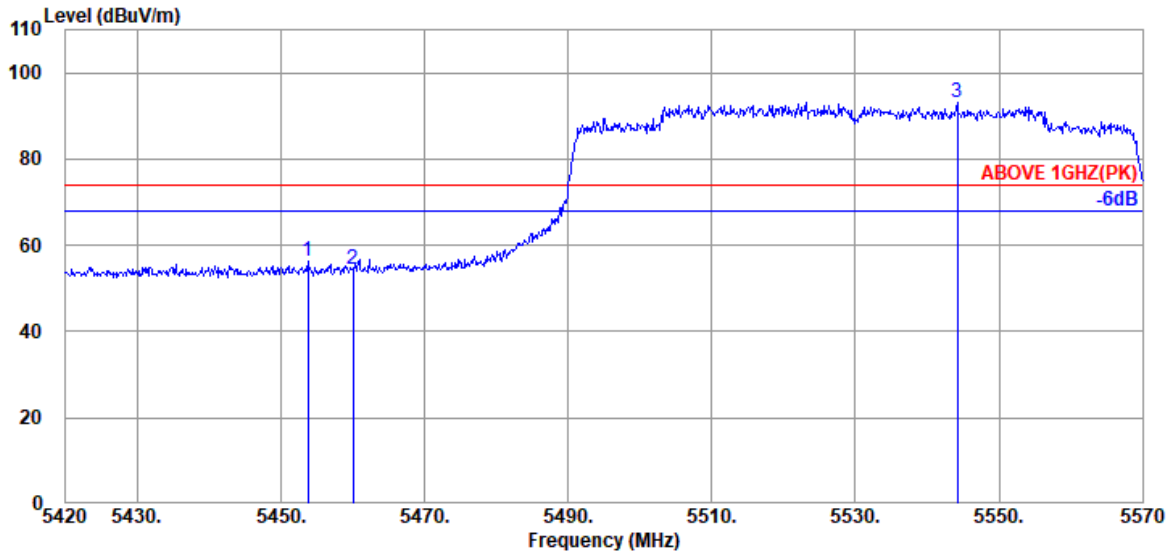

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.750	34.20	9.05	39.26	52.15	56.14	74.00	17.86	Peak
5460.050	34.20	9.05	39.26	50.57	54.56	74.00	19.44	Peak
@ 5544.200	34.10	9.10	39.27	89.30	93.23	---	---	Peak

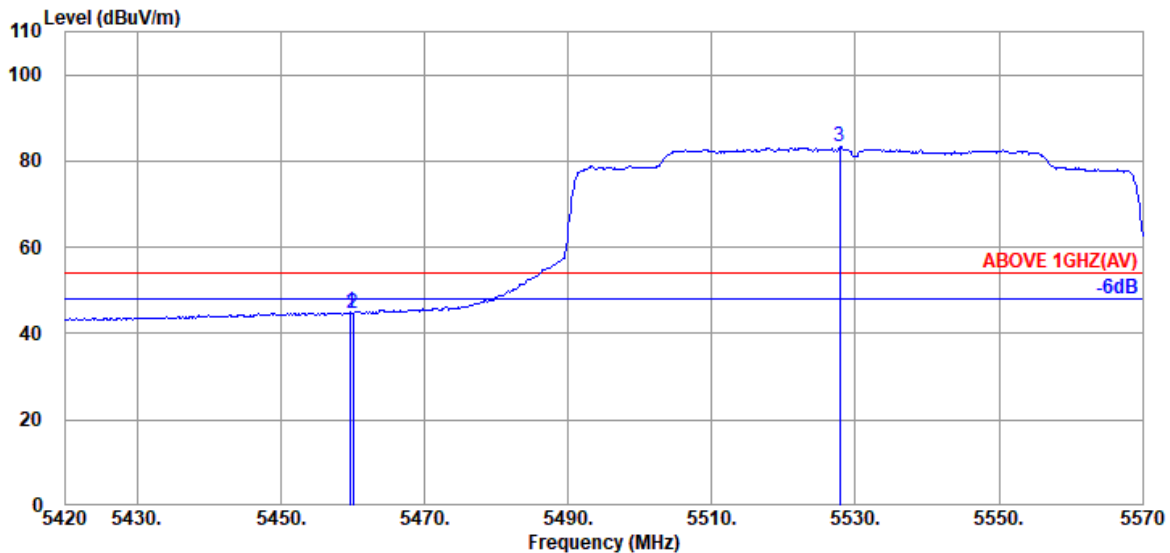


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.20	9.05	39.26	40.88	44.87	54.00	9.13	Average
5460.050	34.20	9.05	39.26	40.77	44.76	54.00	9.24	Average
@ 5527.850	34.10	9.09	39.27	79.27	83.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

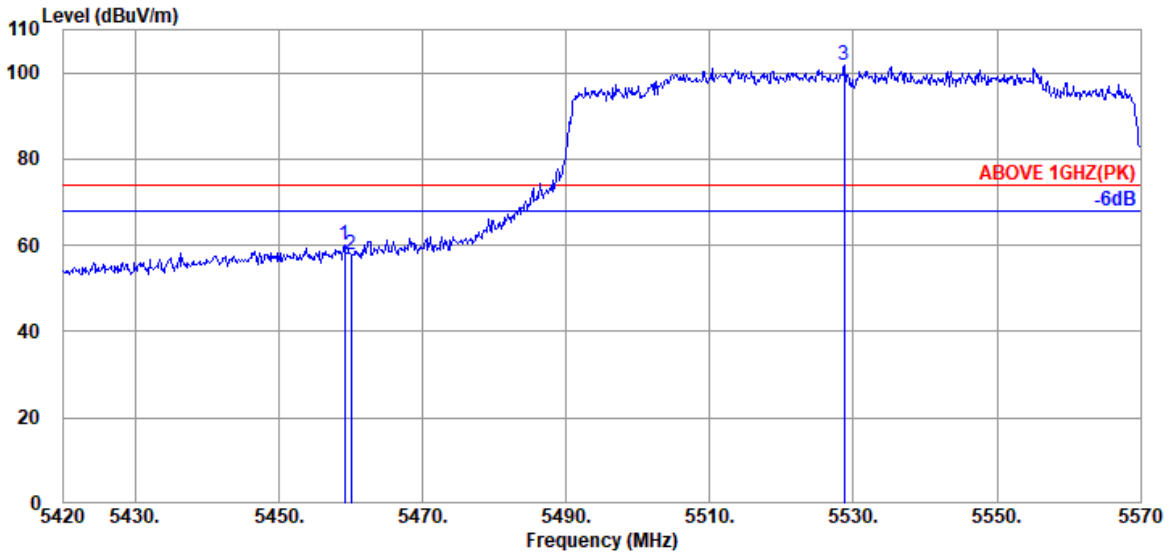

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.150	34.20	9.05	39.26	55.99	59.98	74.00	14.02	Peak
5460.050	34.20	9.05	39.26	53.75	57.74	74.00	16.26	Peak
@ 5528.750	34.10	9.09	39.27	97.90	101.82	---	---	Peak

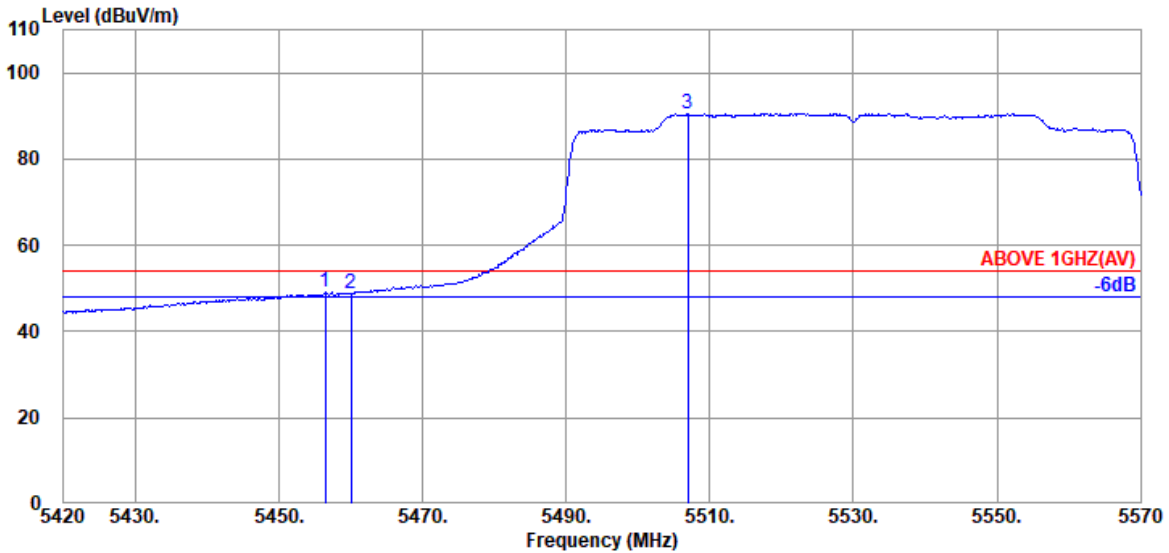


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.450	34.20	9.05	39.26	45.05	49.04	54.00	4.96	Average
5460.050	34.20	9.05	39.26	44.72	48.71	54.00	5.29	Average
@ 5507.000	34.10	9.08	39.26	86.72	90.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

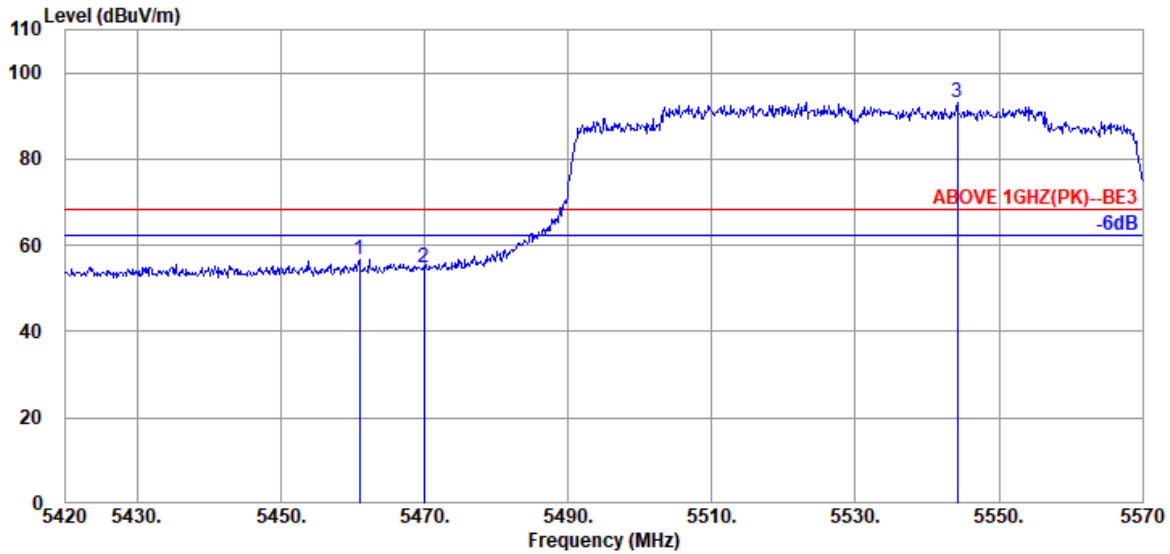

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5460.950	34.20	9.05	39.26	52.61	56.60	68.20	11.60	Peak
	5469.950	34.17	9.06	39.26	50.67	54.64	68.20	13.56	Peak
	5544.200	34.10	9.10	39.27	89.30	93.23	---	---	Peak

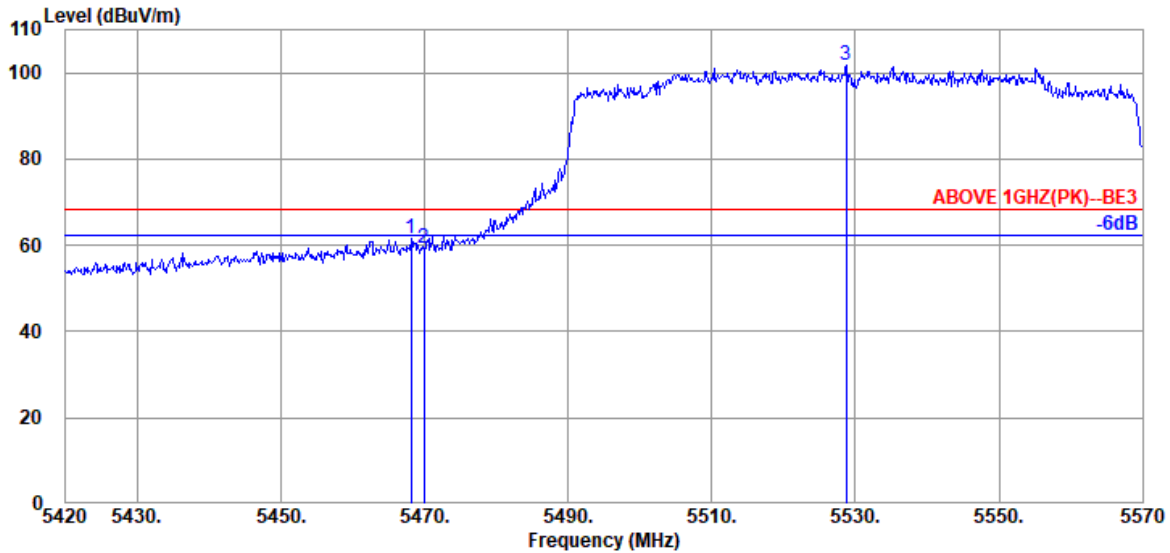


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.150	34.17	9.06	39.26	57.42	61.39	68.20	6.81	Peak
	5469.950	34.17	9.06	39.26	55.18	59.15	68.20	9.05	Peak
	5528.750	34.10	9.09	39.27	97.90	101.82	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

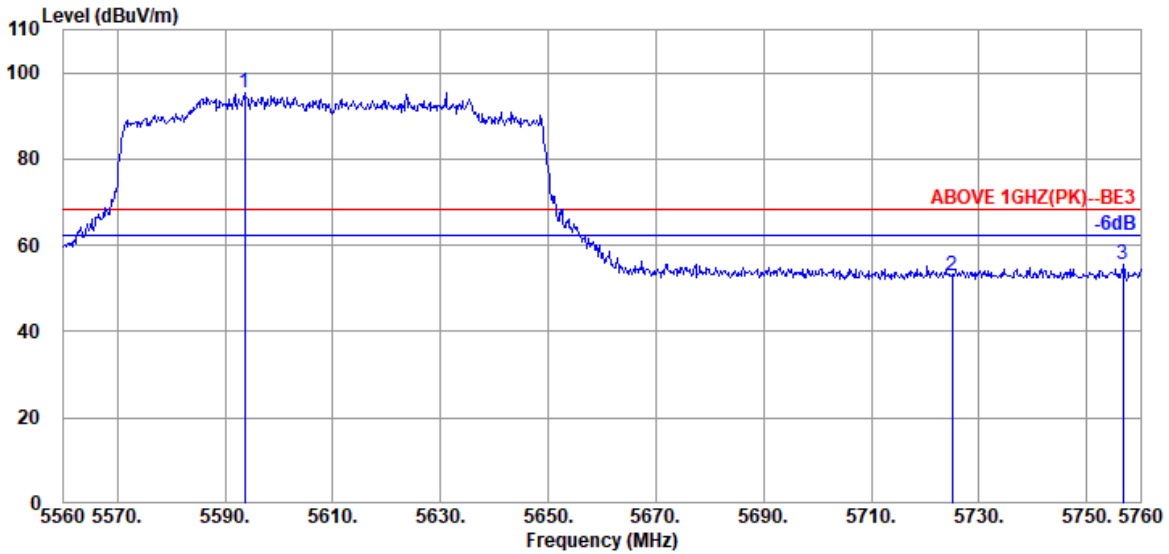

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.600	34.00	9.13	39.28	91.60	95.45	---	---	Peak
5725.000	33.80	9.20	39.30	49.14	52.84	68.20	15.36	Peak
5756.800	33.87	9.21	39.31	51.61	55.38	68.20	12.82	Peak

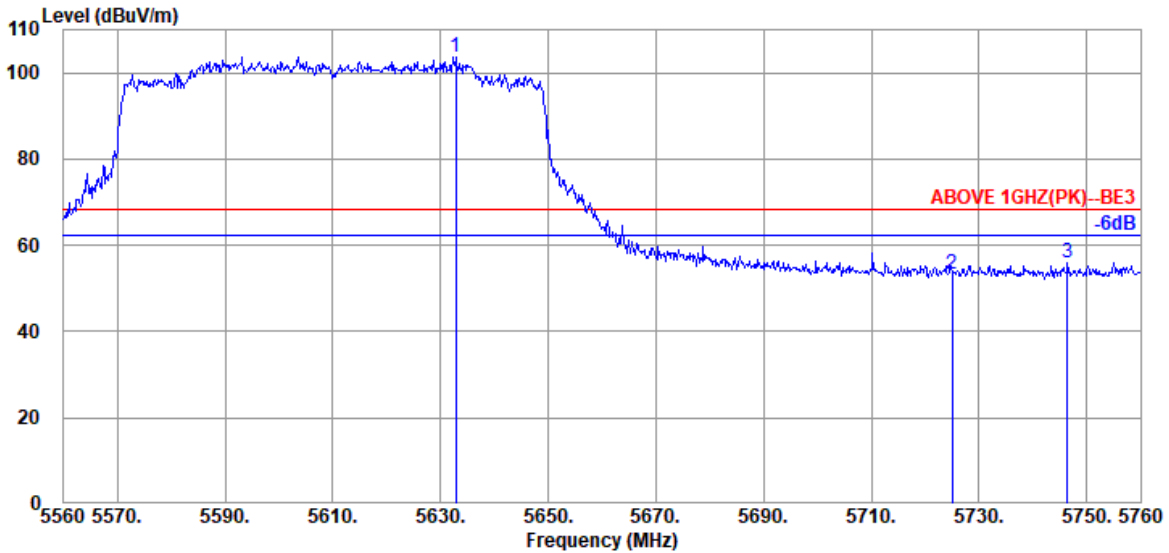


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.800	34.00	9.14	39.29	99.84	103.69	---	---	Peak
5725.000	33.80	9.20	39.30	49.48	53.18	68.20	15.02	Peak
5746.400	33.80	9.20	39.31	52.30	55.99	68.20	12.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

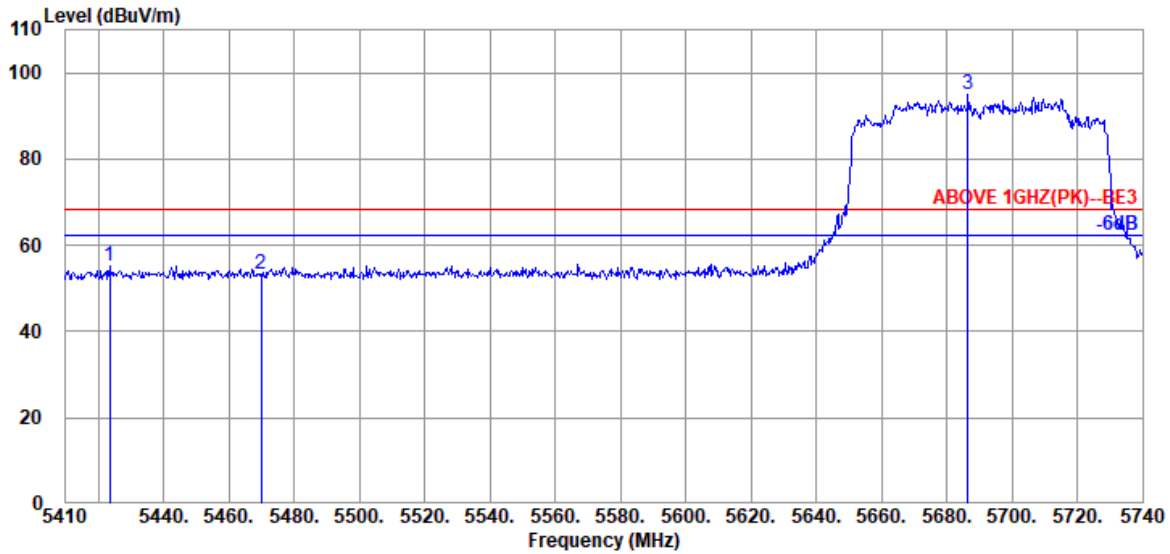

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5423.530	34.15	9.04	39.27	51.18	55.10	68.20	13.10	Peak
5470.060	34.17	9.06	39.26	49.15	53.12	68.20	15.08	Peak
5686.540	33.87	9.17	39.30	91.18	94.92	---	---	Peak

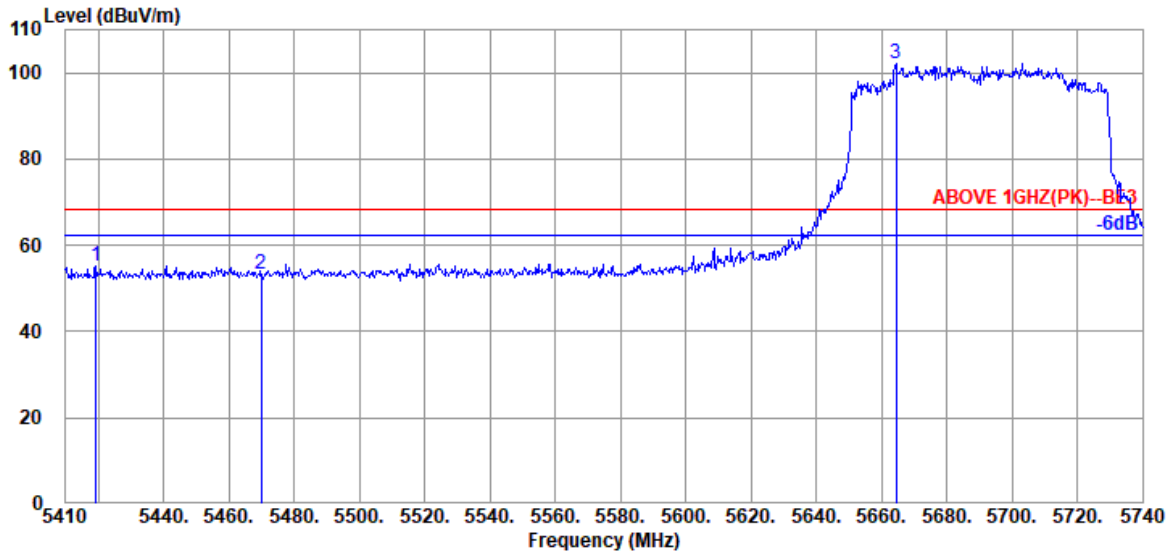


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5419.240	34.15	9.04	39.27	51.45	55.37	68.20	12.83	Peak
5470.060	34.17	9.06	39.26	49.21	53.18	68.20	15.02	Peak
5664.430	33.93	9.16	39.29	98.40	102.20	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

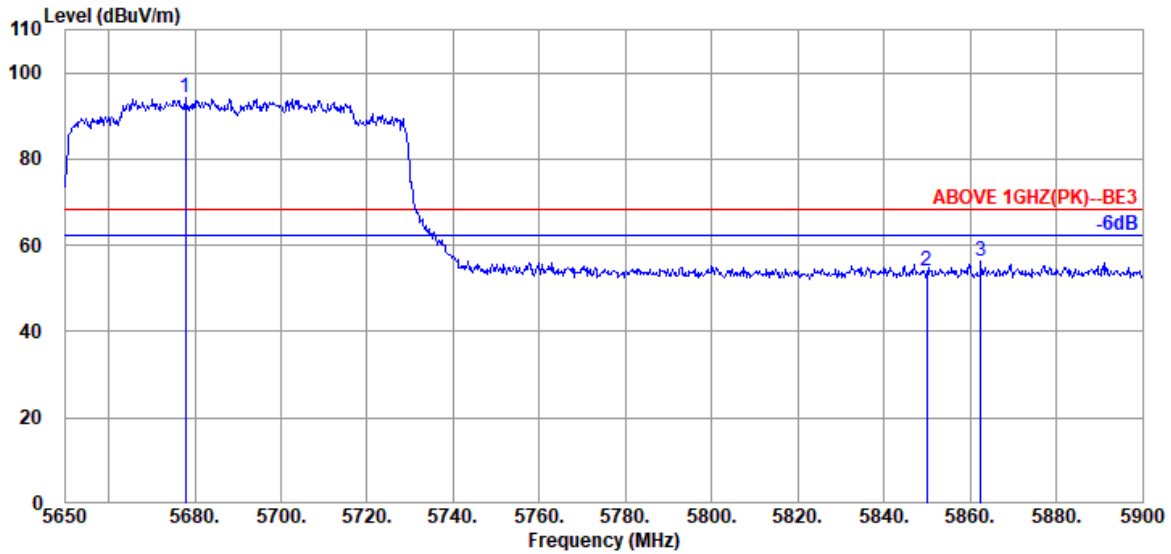

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.750	33.87	9.17	39.30	90.44	94.18	---	---	Peak
5850.000	34.10	9.25	39.33	50.09	54.11	68.20	14.09	Peak
5862.500	34.10	9.26	39.33	52.11	56.14	68.20	12.06	Peak

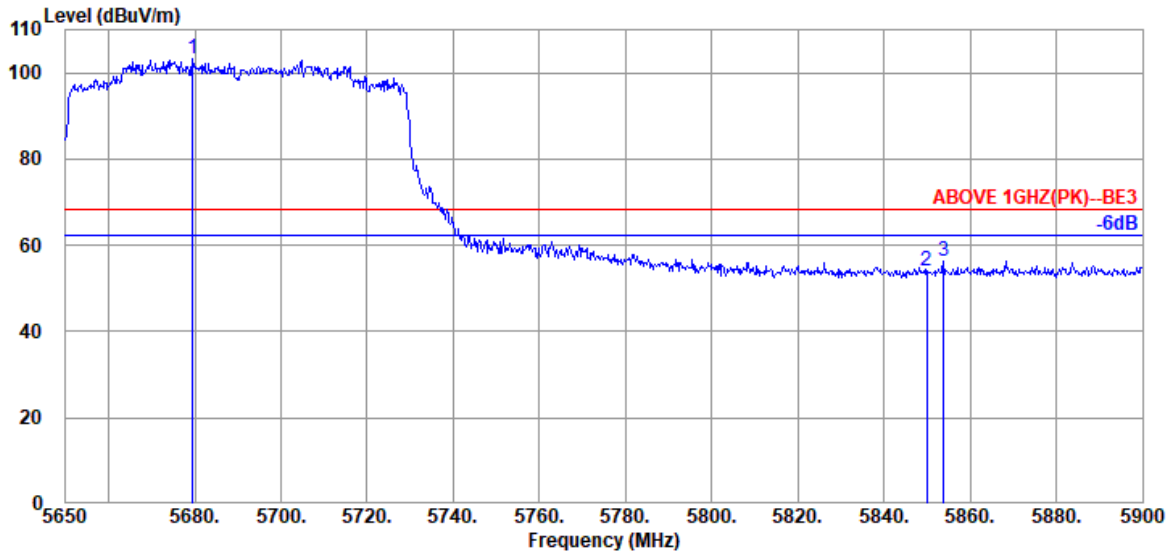


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.500	33.87	9.17	39.30	99.52	103.26	---	---	Peak
5850.000	34.10	9.25	39.33	50.17	54.19	68.20	14.01	Peak
5853.750	34.10	9.25	39.33	52.31	56.33	68.20	11.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

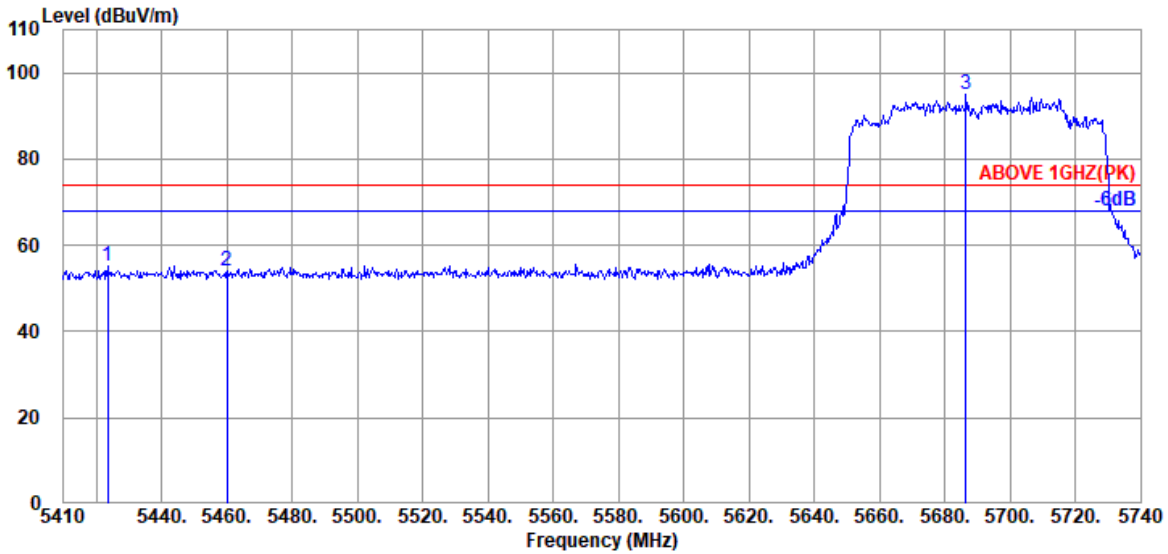

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.530	34.15	9.04	39.27	51.18	55.10	74.00	18.90	Peak
5460.160	34.20	9.05	39.26	49.96	53.95	74.00	20.05	Peak
@ 5686.540	33.87	9.17	39.30	91.18	94.92	---	---	Peak

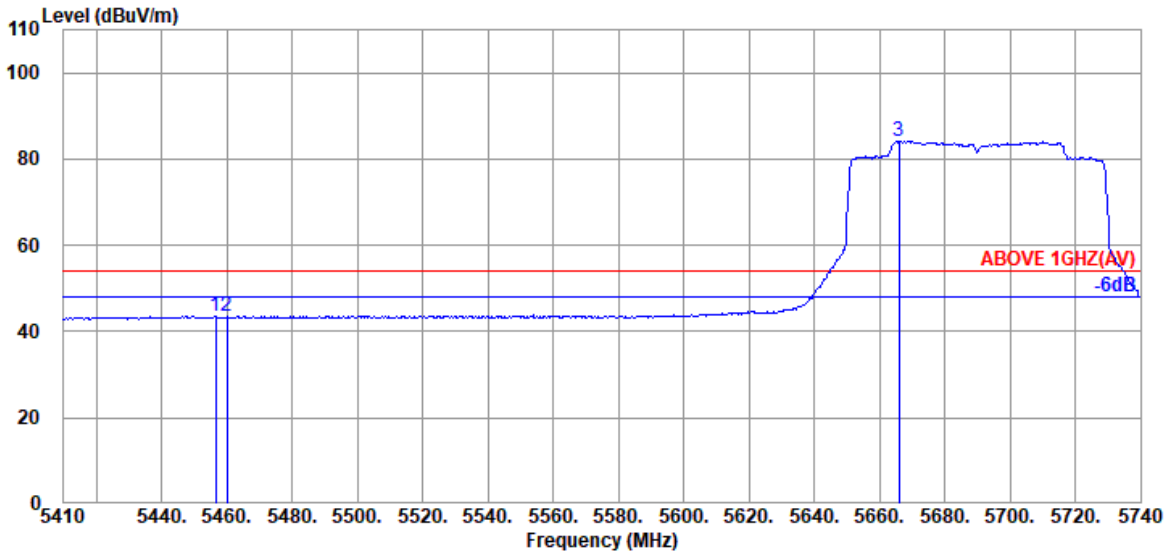


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.530	34.20	9.05	39.26	39.55	43.54	54.00	10.46	Average
5460.160	34.20	9.05	39.26	39.38	43.37	54.00	10.63	Average
@ 5666.080	33.93	9.16	39.29	80.41	84.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

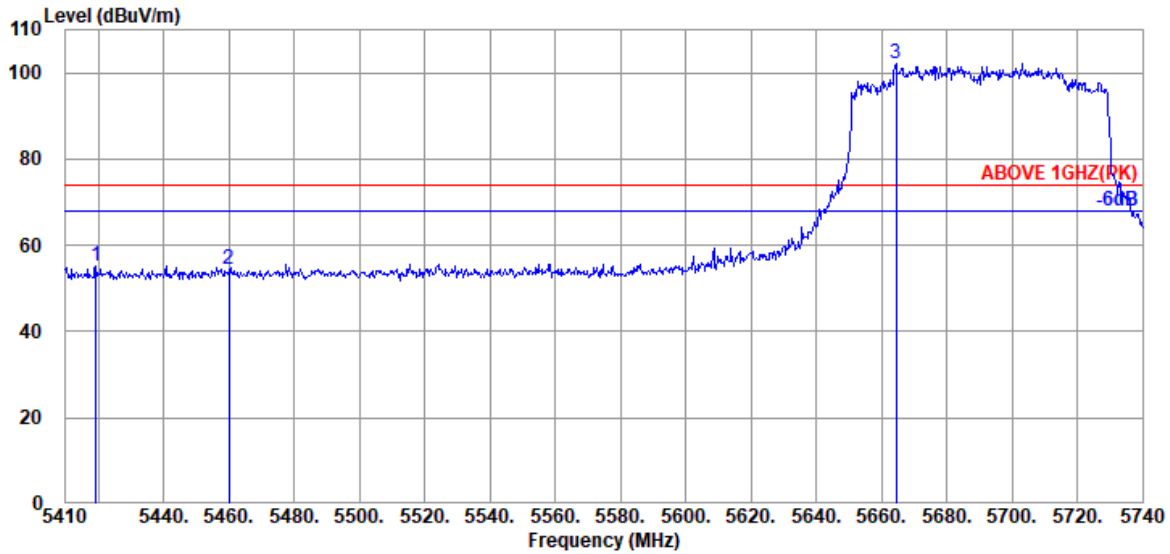

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.240	34.15	9.04	39.27	51.45	55.37	74.00	18.63	Peak
5460.160	34.20	9.05	39.26	50.51	54.50	74.00	19.50	Peak
@ 5664.430	33.93	9.16	39.29	98.40	102.20	---	---	Peak

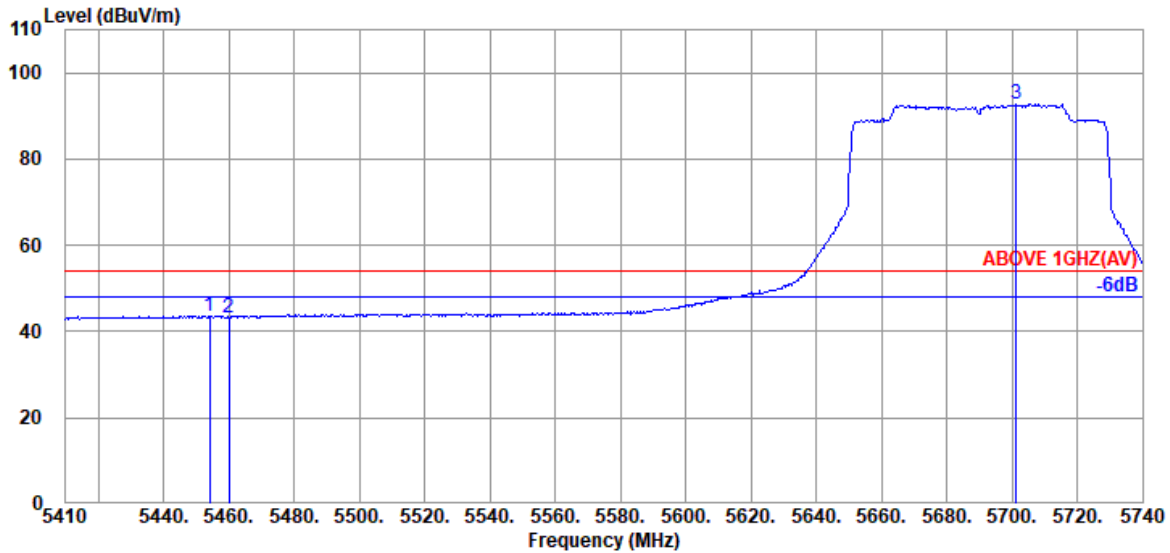


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.220	34.20	9.05	39.26	39.60	43.59	54.00	10.41	Average
5460.160	34.20	9.05	39.26	39.34	43.33	54.00	10.67	Average
@ 5701.390	33.80	9.18	39.30	88.99	92.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

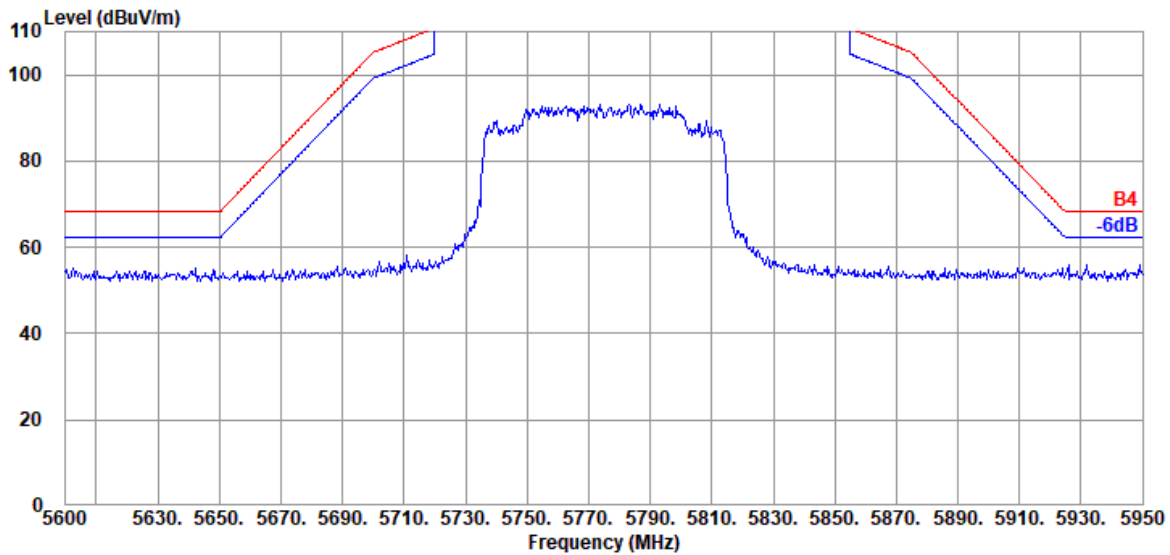

Antenna at Vertical Polarization

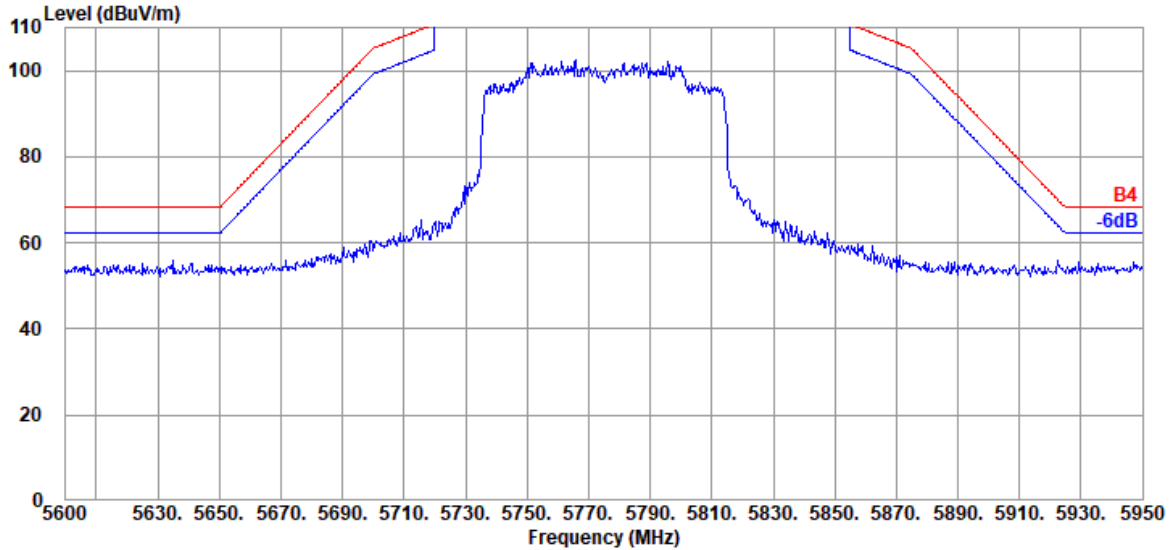


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

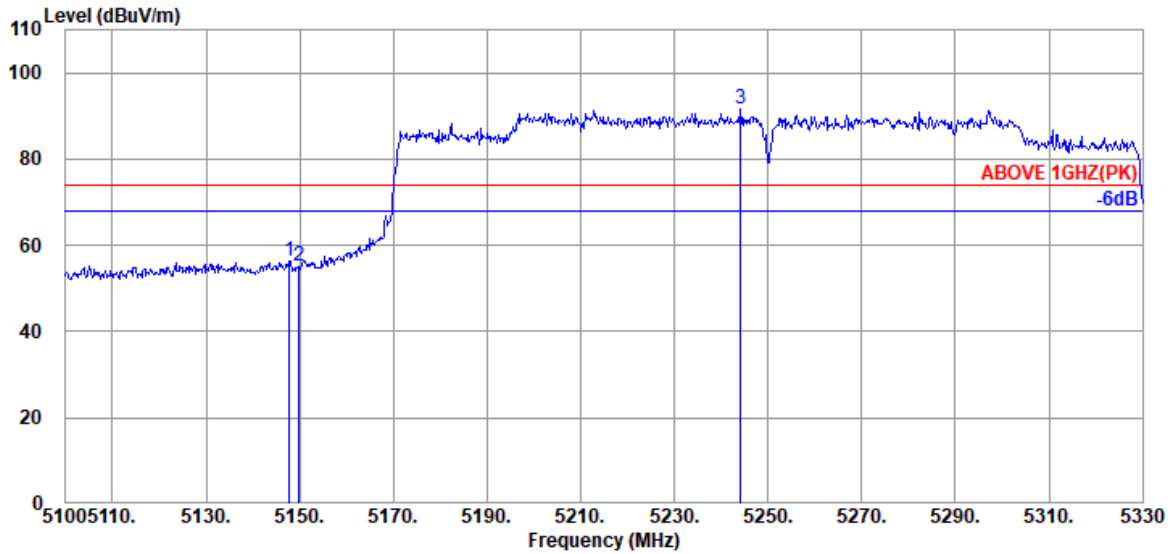

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	33.70	8.88	39.29	53.03	56.32	74.00	17.68	Peak
5149.910	33.70	8.88	39.29	51.95	55.24	74.00	18.76	Peak
@ 5244.210	33.78	8.93	39.28	88.11	91.54	---	---	Peak

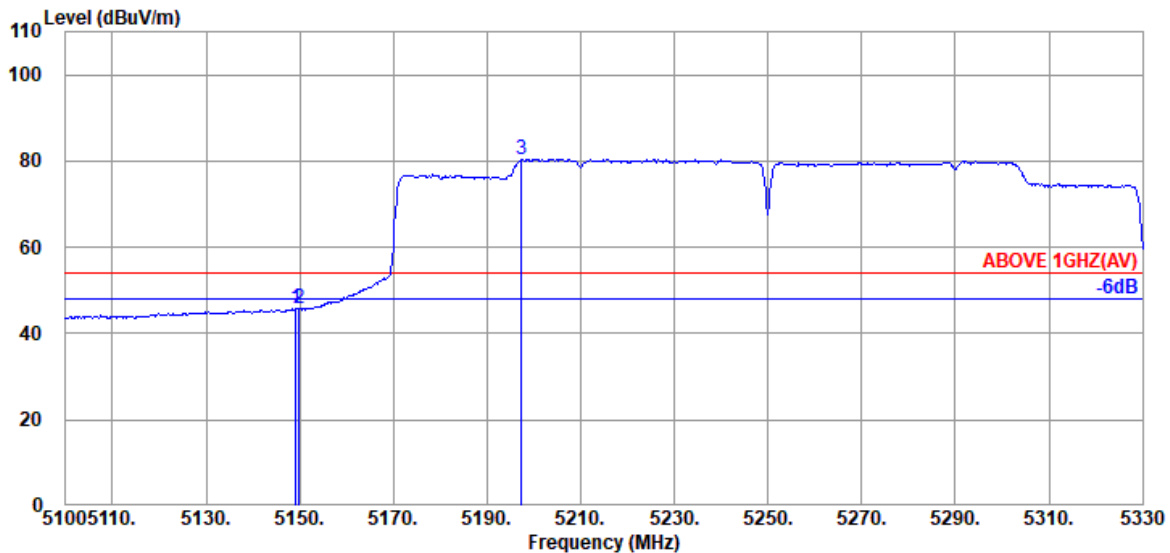


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	33.70	8.88	39.29	42.64	45.93	54.00	8.07	Average
5149.910	33.70	8.88	39.29	42.48	45.77	54.00	8.23	Average
@ 5197.290	33.70	8.91	39.28	77.18	80.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

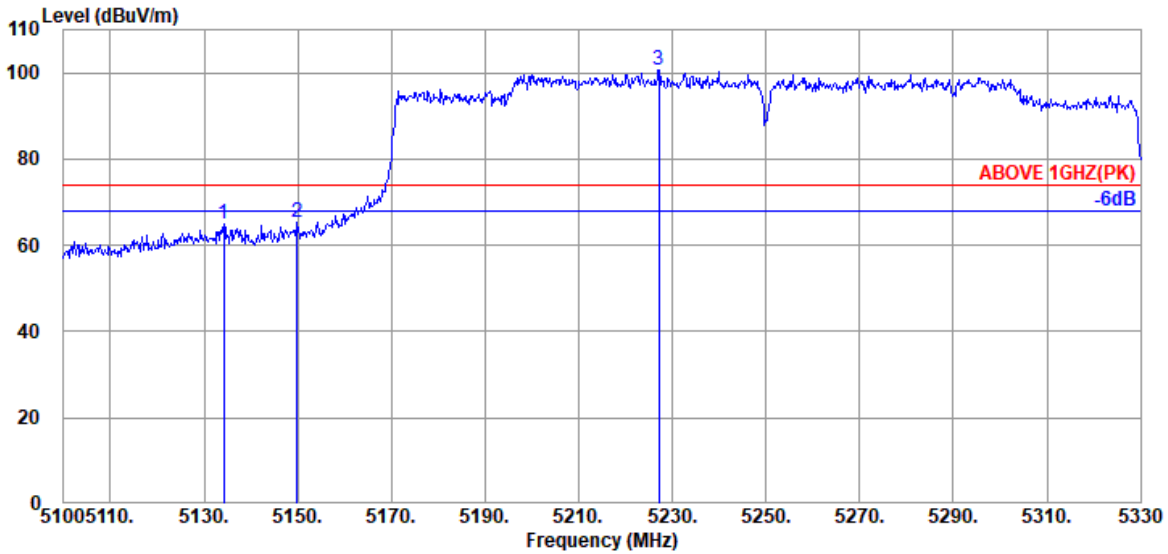

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.270	33.70	8.88	39.29	61.76	65.05	74.00	8.95	Peak
5149.910	33.70	8.88	39.29	61.88	65.17	74.00	8.83	Peak
@ 5227.190	33.75	8.93	39.28	97.20	100.60	---	---	Peak

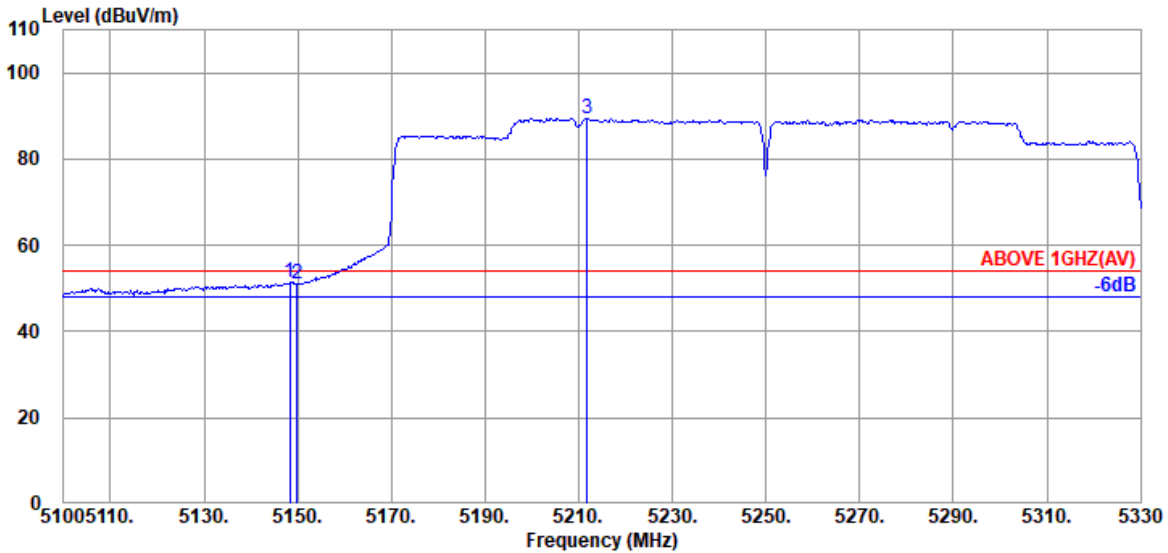


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.70	8.88	39.29	48.05	51.34	54.00	2.66	Average
5149.910	33.70	8.88	39.29	47.66	50.95	54.00	3.05	Average
@ 5211.780	33.72	8.92	39.28	86.04	89.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

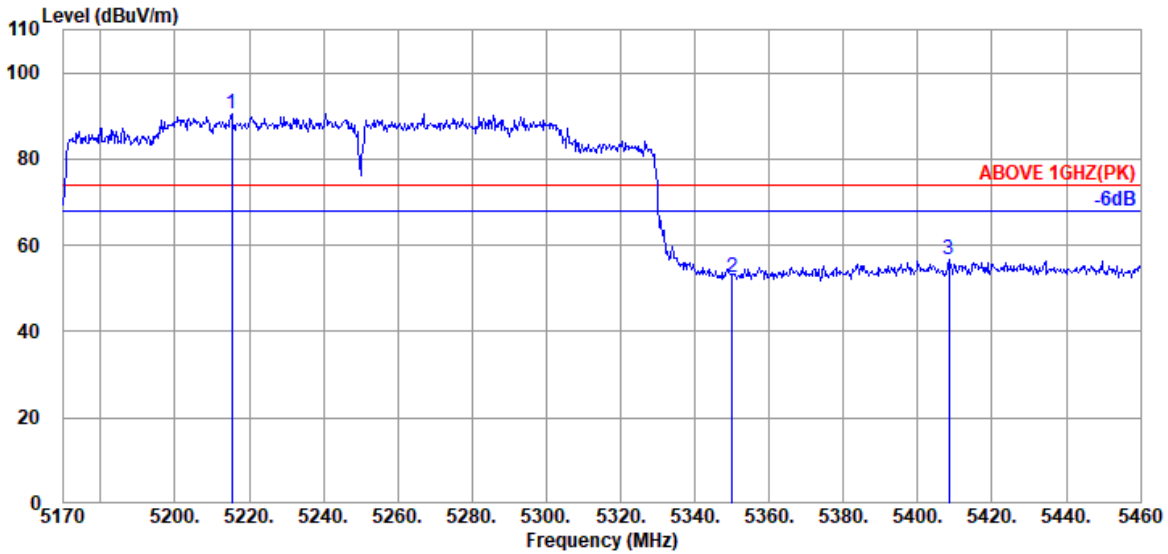

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5215.240	33.72	8.92	39.28	87.28	90.64	---	---	Peak
5350.090	33.90	8.99	39.27	49.09	52.71	74.00	21.29	Peak
5408.380	34.12	9.03	39.27	52.77	56.65	74.00	17.35	Peak

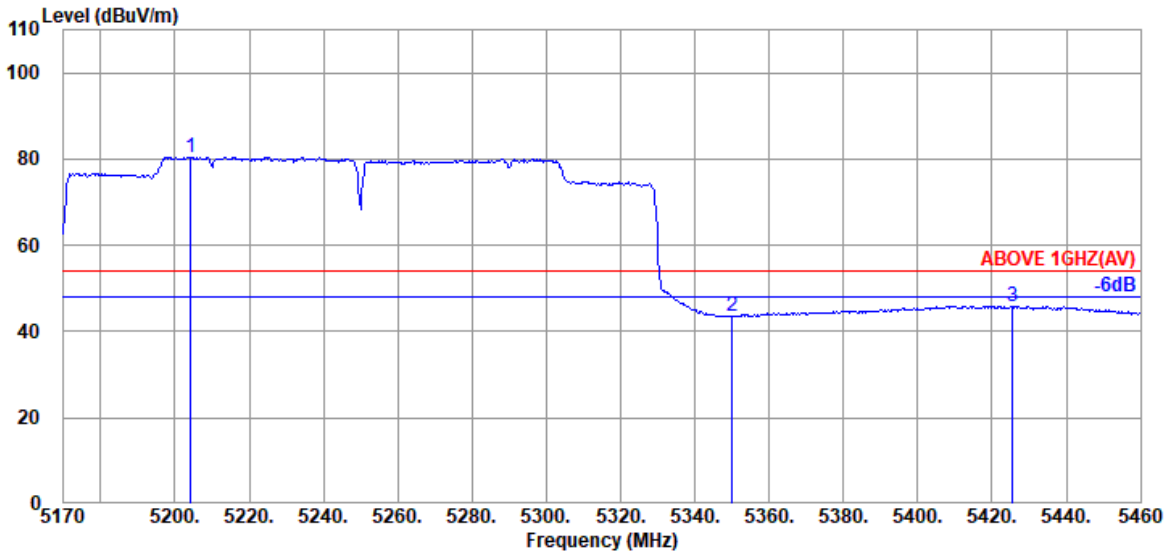


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5204.220	33.72	8.92	39.28	77.12	80.48	---	---	Average
5350.090	33.90	8.99	39.27	39.77	43.39	54.00	10.61	Average
5425.490	34.15	9.04	39.27	42.06	45.98	54.00	8.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

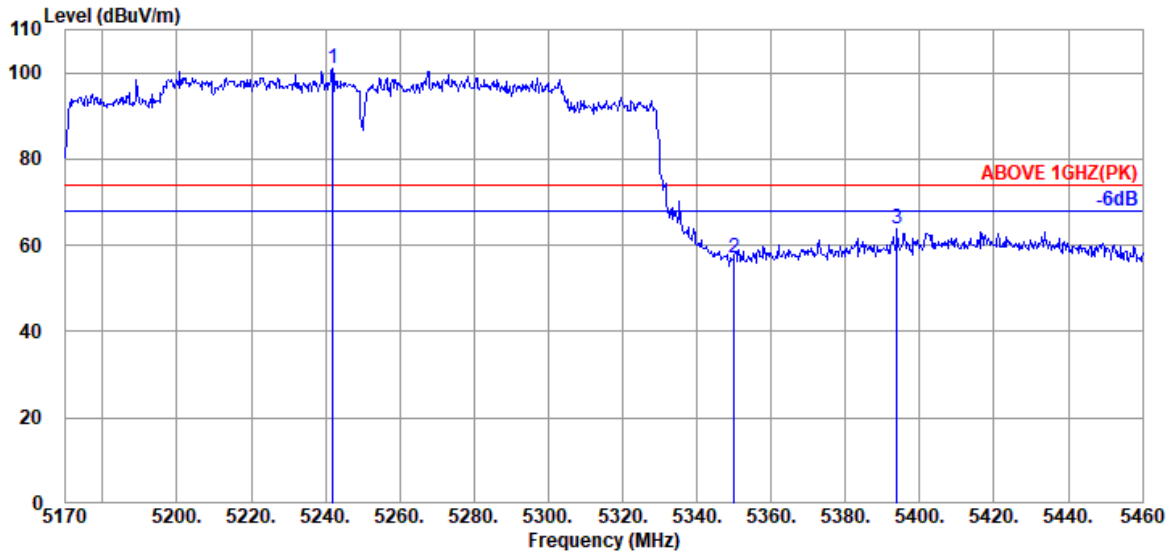

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5241.920	33.78	8.93	39.28	97.40	100.83	---	---	Peak
5350.090	33.90	8.99	39.27	53.27	56.89	74.00	17.11	Peak
5393.880	34.10	9.02	39.27	59.90	63.75	74.00	10.25	Peak

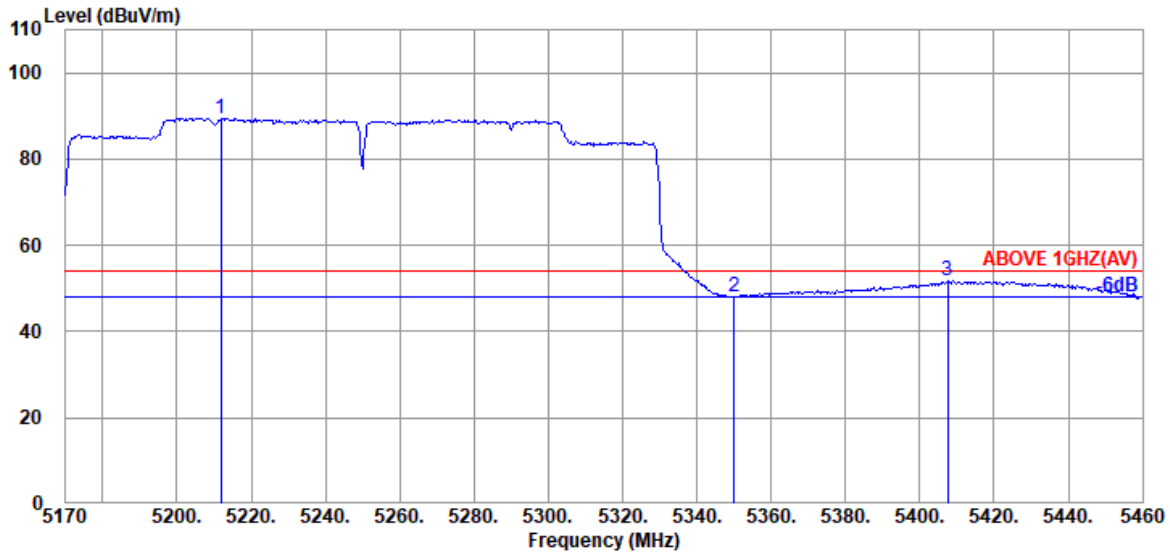


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5211.760	33.72	8.92	39.28	86.07	89.43	---	---	Average
5350.090	33.90	8.99	39.27	44.42	48.04	54.00	5.96	Average
5407.510	34.12	9.03	39.27	47.85	51.73	54.00	2.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

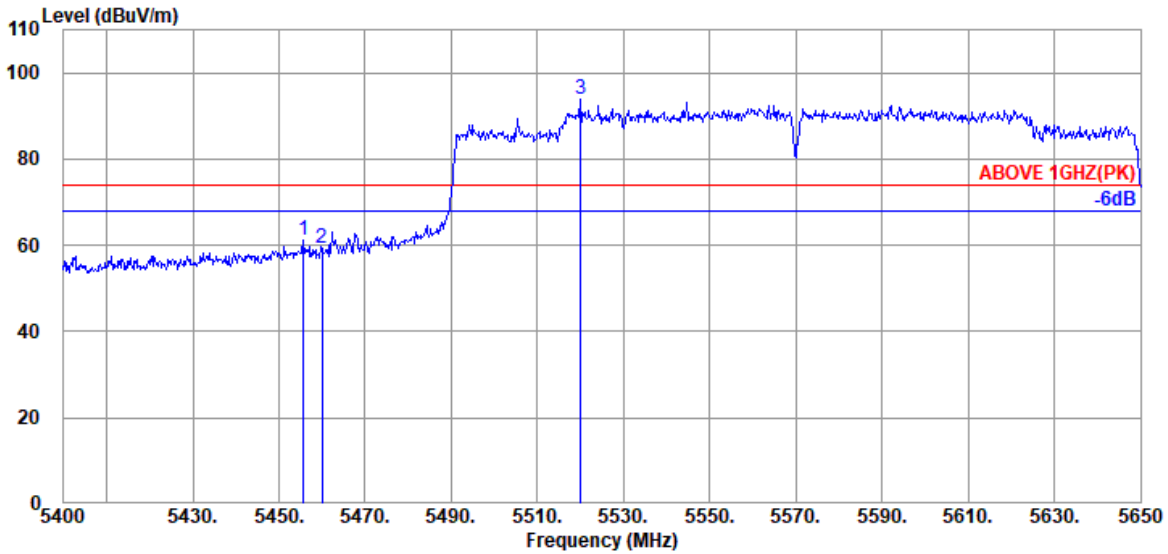

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.750	34.20	9.05	39.26	57.38	61.37	74.00	12.63	Peak
5460.000	34.20	9.05	39.26	55.49	59.48	74.00	14.52	Peak
@ 5520.000	34.10	9.09	39.26	89.84	93.77	---	---	Peak

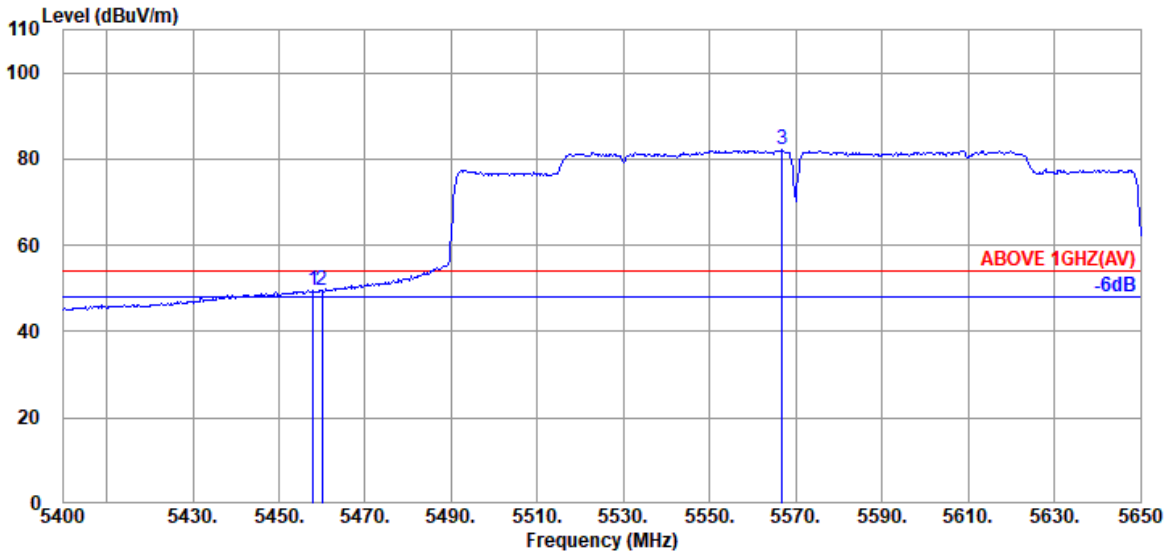


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.000	34.20	9.05	39.26	45.56	49.55	54.00	4.45	Average
5460.000	34.20	9.05	39.26	45.65	49.64	54.00	4.36	Average
@ 5566.750	34.07	9.11	39.27	78.21	82.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

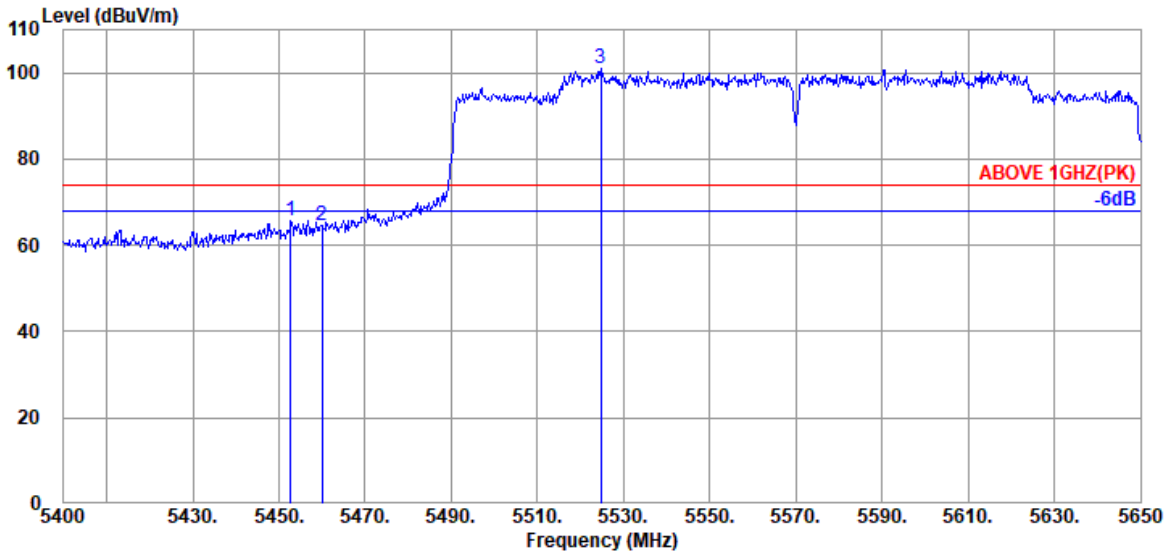

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.750	34.20	9.05	39.26	61.68	65.67	74.00	8.33	Peak
5460.000	34.20	9.05	39.26	60.68	64.67	74.00	9.33	Peak
@ 5524.750	34.10	9.09	39.27	97.15	101.07	---	---	Peak

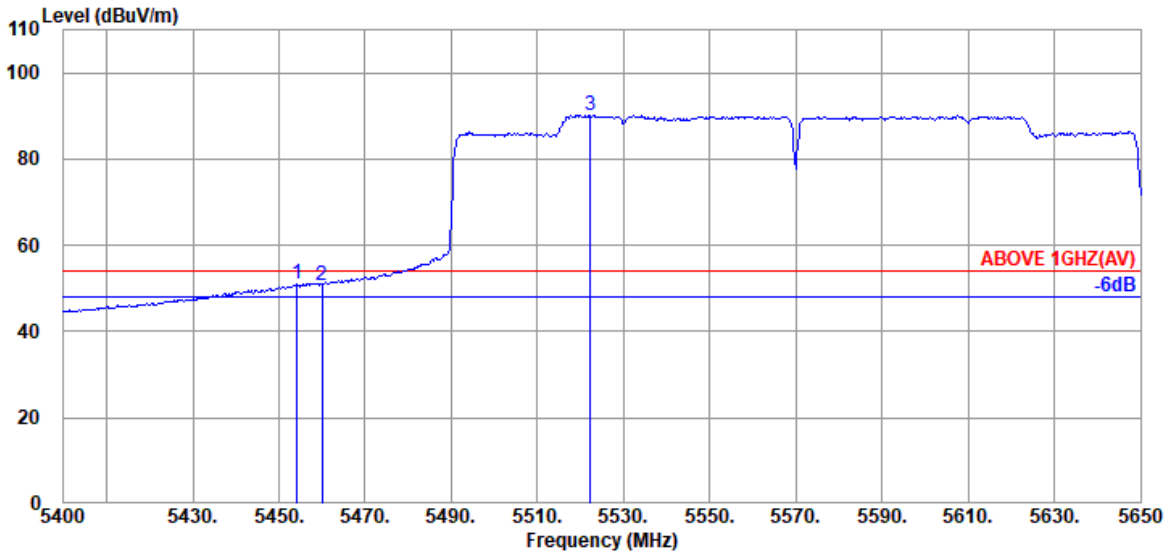


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.250	34.20	9.05	39.26	47.12	51.11	54.00	2.89	Average
5460.000	34.20	9.05	39.26	46.78	50.77	54.00	3.23	Average
@ 5522.250	34.10	9.09	39.26	86.22	90.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

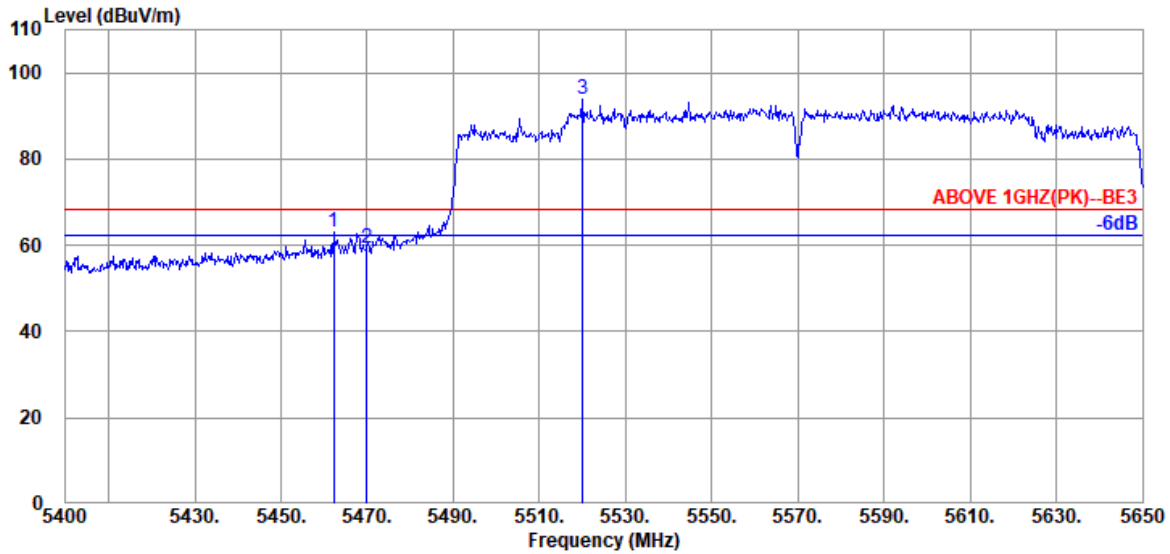

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5462.250	34.20	9.05	39.26	58.93	62.92	68.20	5.28	Peak
5470.000	34.17	9.06	39.26	55.35	59.32	68.20	8.88	Peak
5520.000	34.10	9.09	39.26	89.84	93.77	---	---	Peak

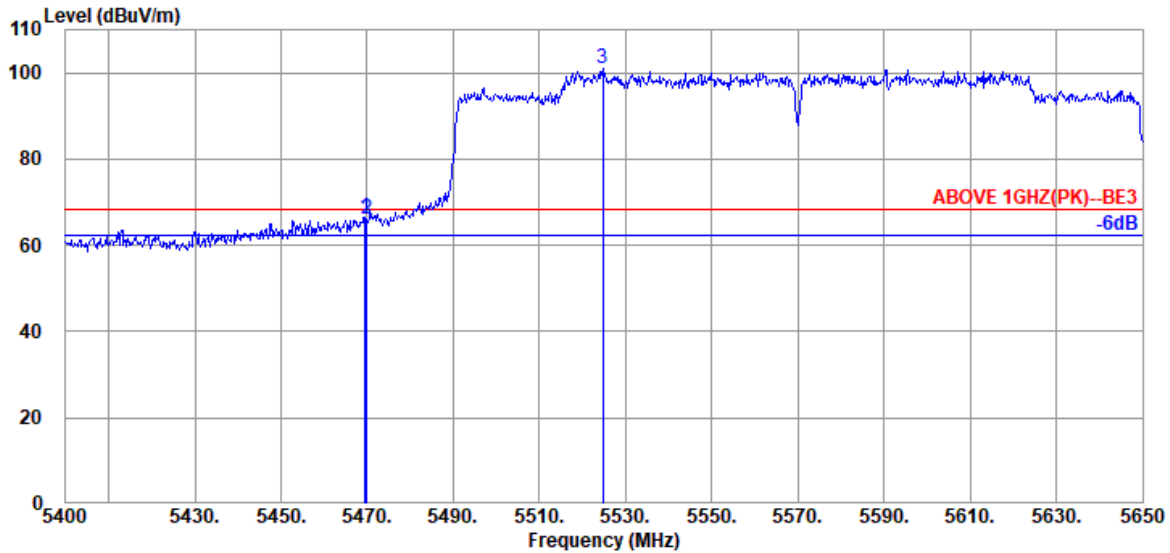

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5469.500	34.17	9.06	39.26	62.64	66.61	68.20	1.59	Peak
5470.000	34.17	9.06	39.26	62.27	66.24	68.20	1.96	Peak
5524.750	34.10	9.09	39.27	97.15	101.07	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

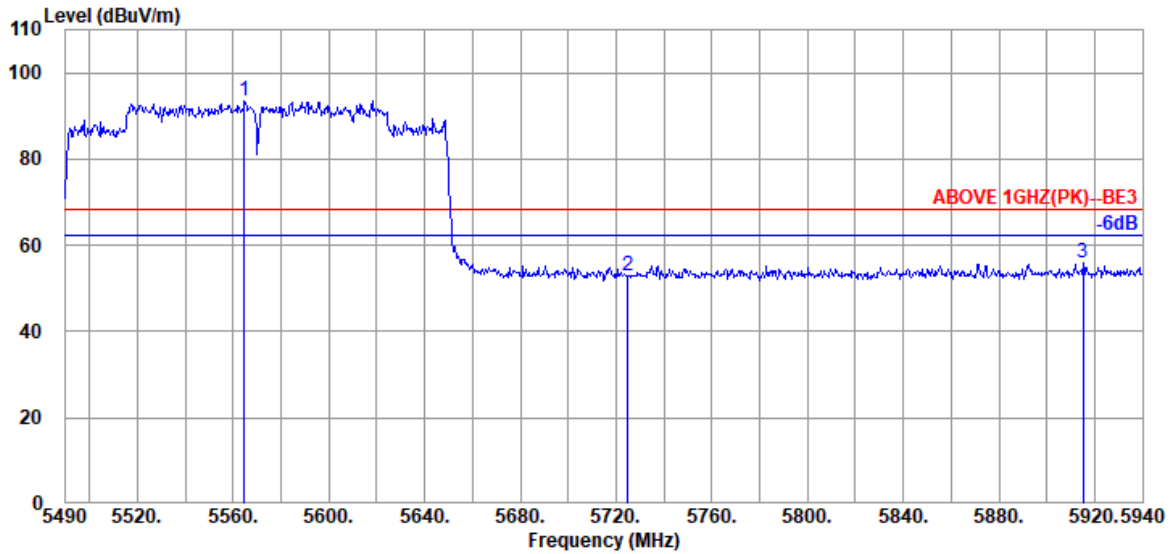

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5564.700	34.07	9.11	39.27	89.39	93.30	---	---	Peak
5724.900	33.80	9.20	39.30	49.05	52.75	68.20	15.45	Peak
5915.250	34.17	9.29	39.34	51.78	55.90	68.20	12.30	Peak

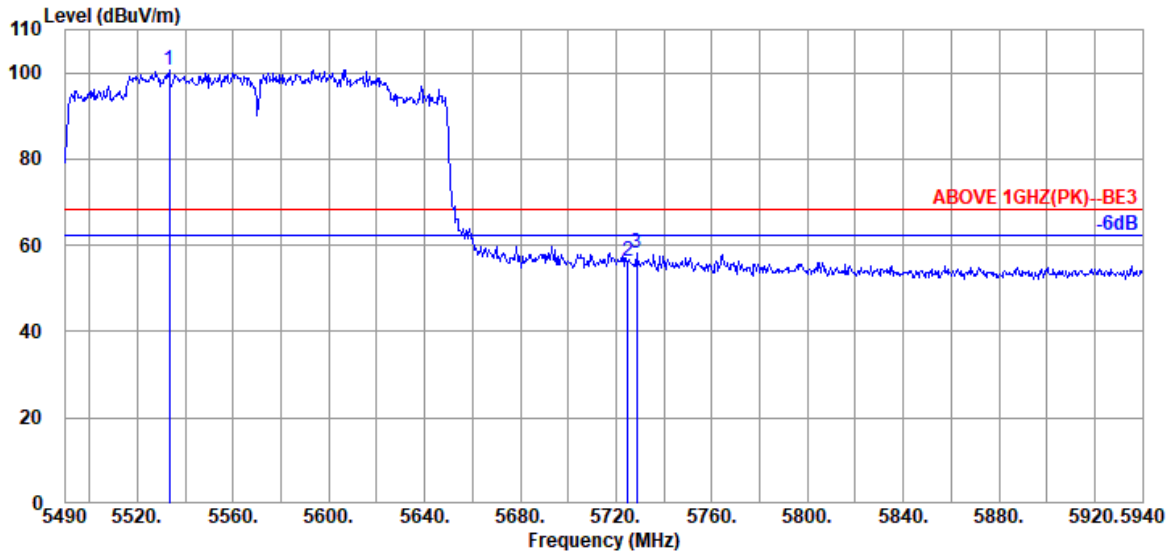


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5533.200	34.10	9.09	39.27	96.68	100.60	---	---	Peak
5724.900	33.80	9.20	39.30	52.65	56.35	68.20	11.85	Peak
5728.500	33.80	9.20	39.31	54.35	58.04	68.20	10.16	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

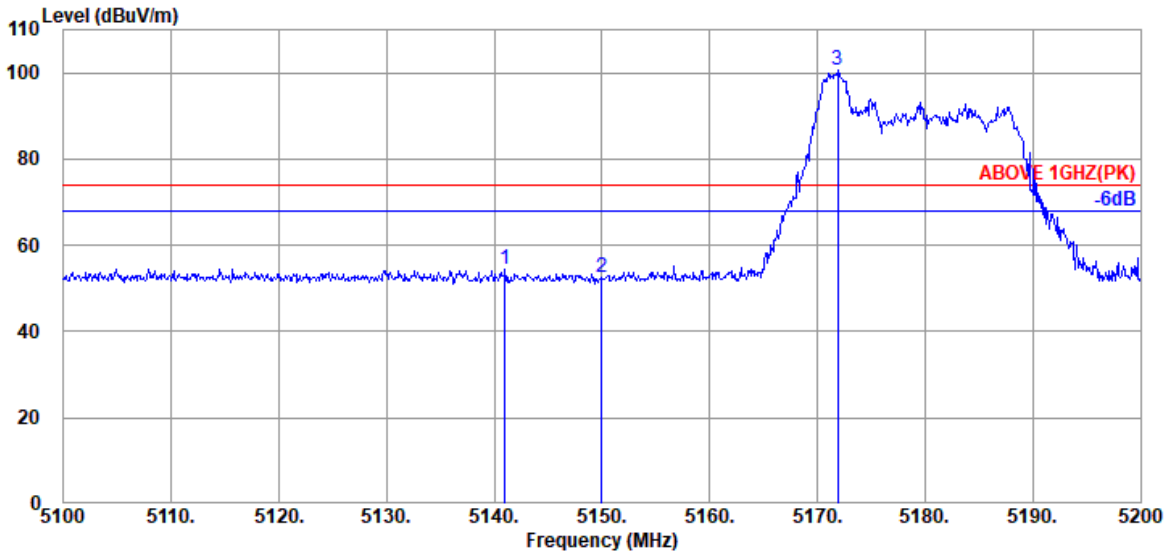

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.000	33.70	8.88	39.29	51.29	54.58	74.00	19.42	Peak
5150.000	33.70	8.88	39.29	49.22	52.51	74.00	21.49	Peak
@ 5171.900	33.70	8.90	39.29	97.12	100.43	---	---	Peak

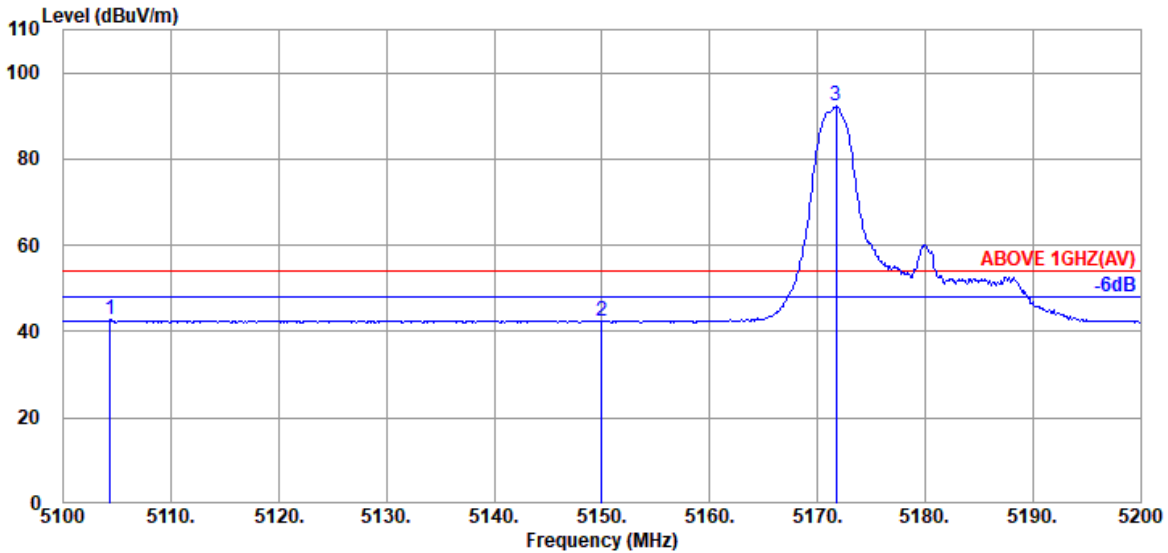


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.300	33.70	8.86	39.29	39.41	42.68	54.00	11.32	Average
5150.000	33.70	8.88	39.29	38.97	42.26	54.00	11.74	Average
@ 5171.700	33.70	8.90	39.29	88.86	92.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

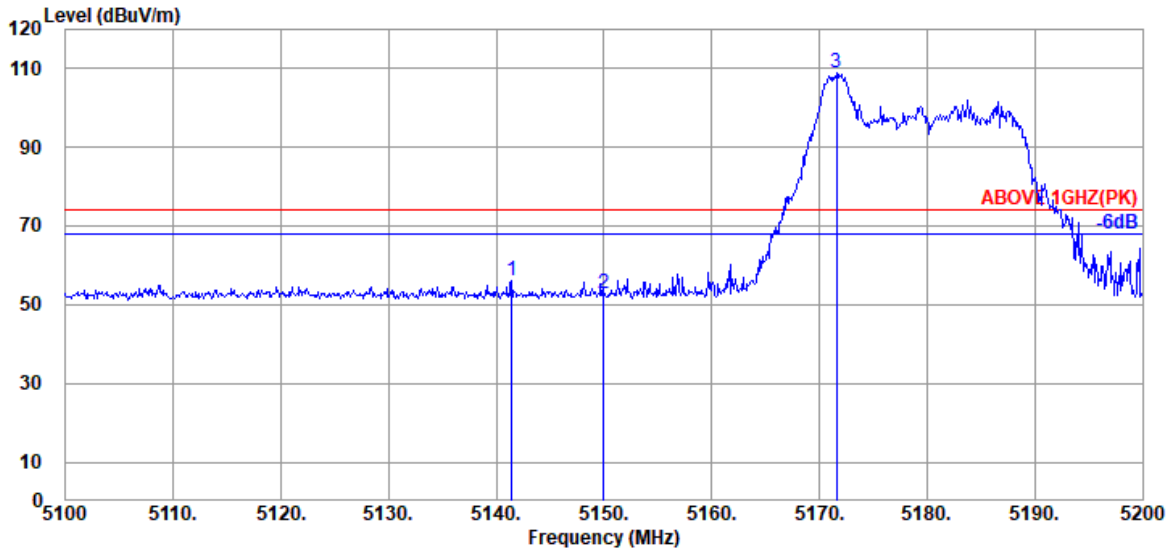

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.400	33.70	8.88	39.29	52.95	56.24	74.00	17.76	Peak
5150.000	33.70	8.88	39.29	49.51	52.80	74.00	21.20	Peak
@ 5171.600	33.70	8.90	39.29	105.45	108.76	---	---	Peak

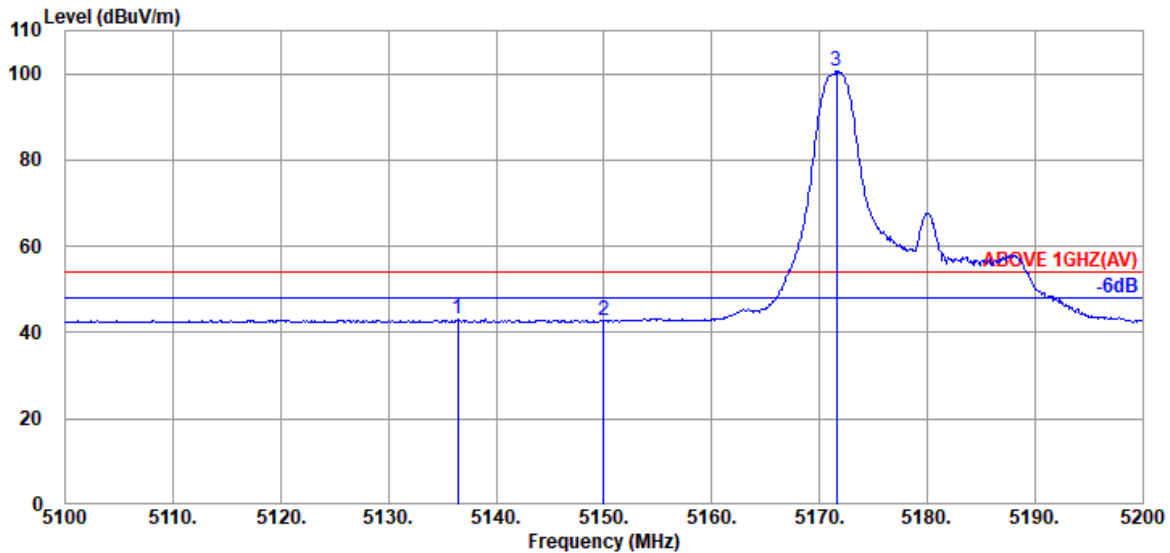


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.400	33.70	8.88	39.29	39.73	43.02	54.00	10.98	Average
5150.000	33.70	8.88	39.29	39.46	42.75	54.00	11.25	Average
@ 5171.600	33.70	8.90	39.29	97.43	100.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

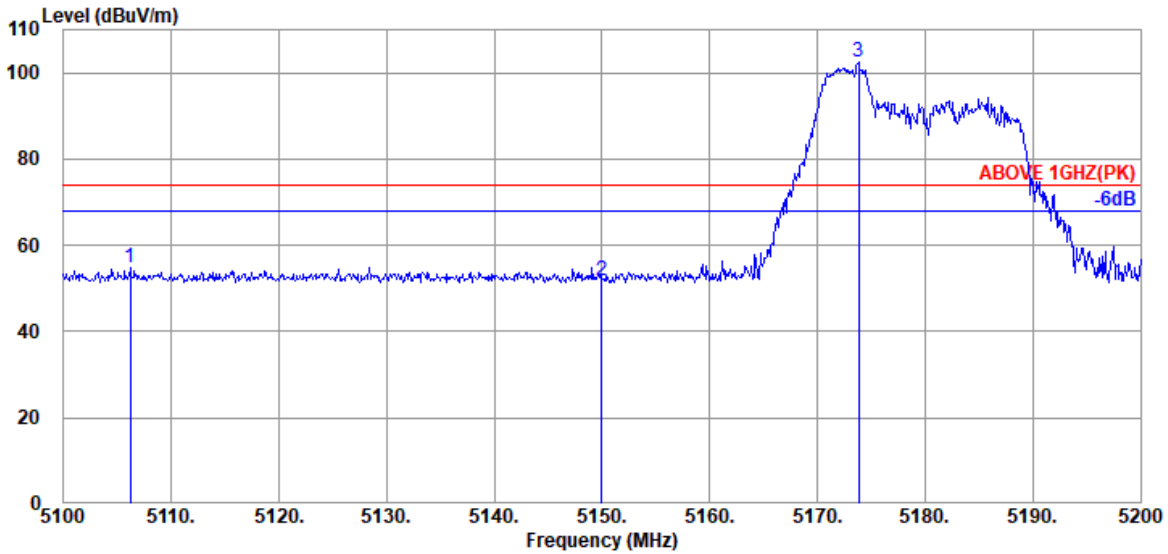

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.200	33.70	8.86	39.29	51.59	54.86	74.00	19.14	Peak
5150.000	33.70	8.88	39.29	48.59	51.88	74.00	22.12	Peak
@ 5173.800	33.70	8.90	39.28	99.32	102.64	---	---	Peak

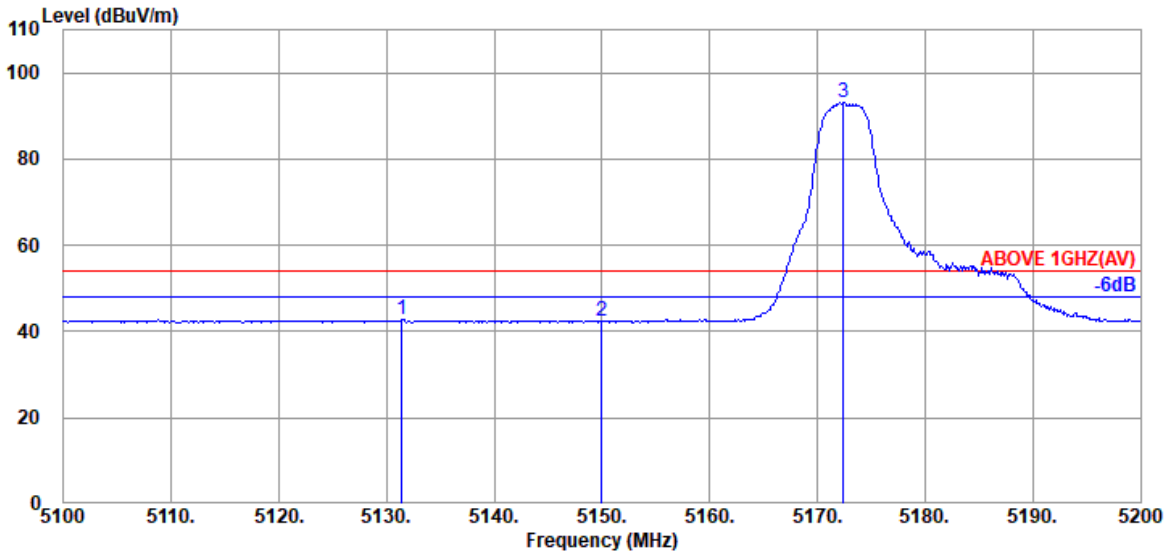


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.400	33.70	8.88	39.29	39.37	42.66	54.00	11.34	Average
5150.000	33.70	8.88	39.29	39.04	42.33	54.00	11.67	Average
@ 5172.400	33.70	8.90	39.29	89.71	93.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

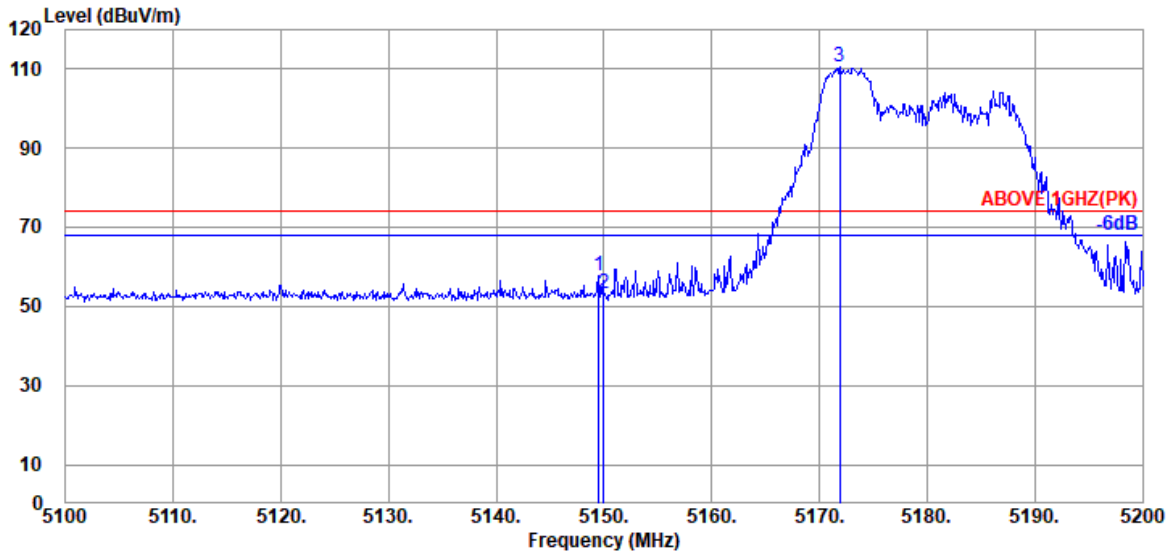

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	54.31	57.60	74.00	16.40	Peak
5150.000	33.70	8.88	39.29	50.06	53.35	74.00	20.65	Peak
@ 5171.900	33.70	8.90	39.29	107.28	110.59	---	---	Peak

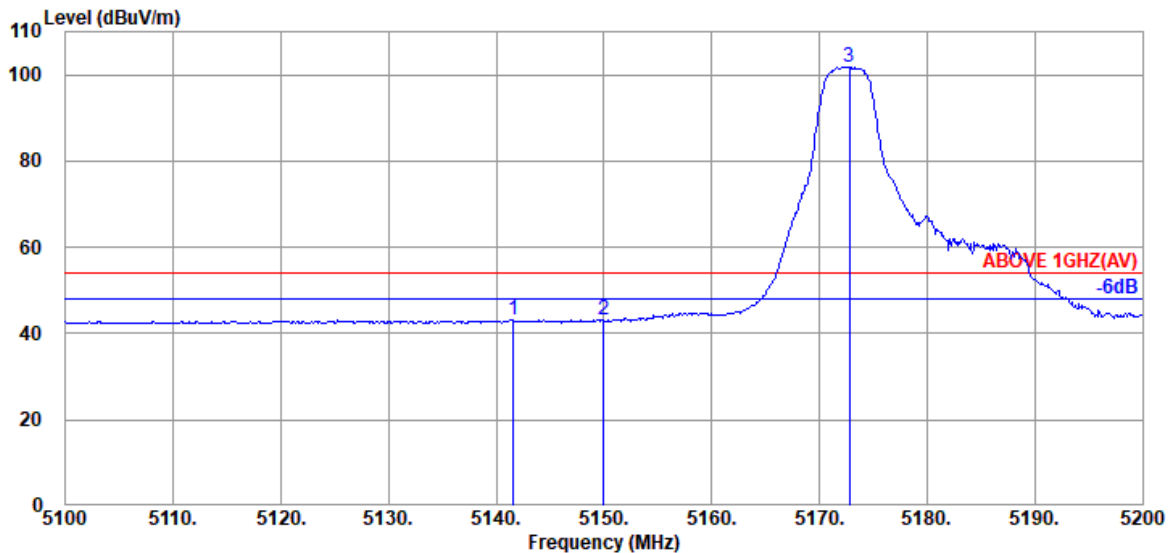


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.70	8.88	39.29	39.85	43.14	54.00	10.86	Average
5150.000	33.70	8.88	39.29	39.71	43.00	54.00	11.00	Average
@ 5172.800	33.70	8.90	39.29	98.55	101.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

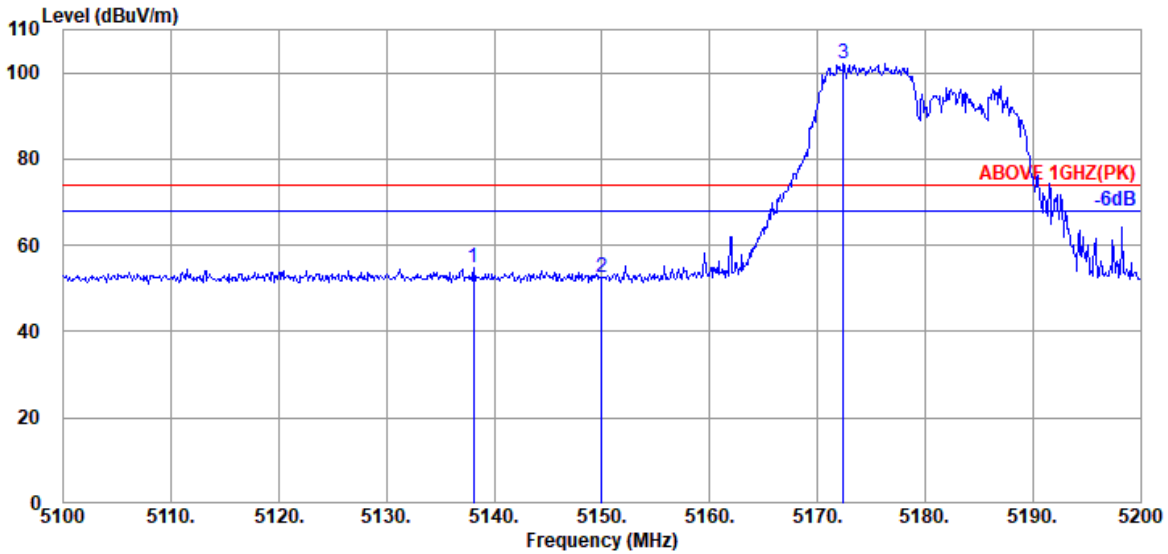

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.100	33.70	8.88	39.29	51.64	54.93	74.00	19.07	Peak
5150.000	33.70	8.88	39.29	49.23	52.52	74.00	21.48	Peak
@ 5172.400	33.70	8.90	39.29	98.91	102.22	---	---	Peak

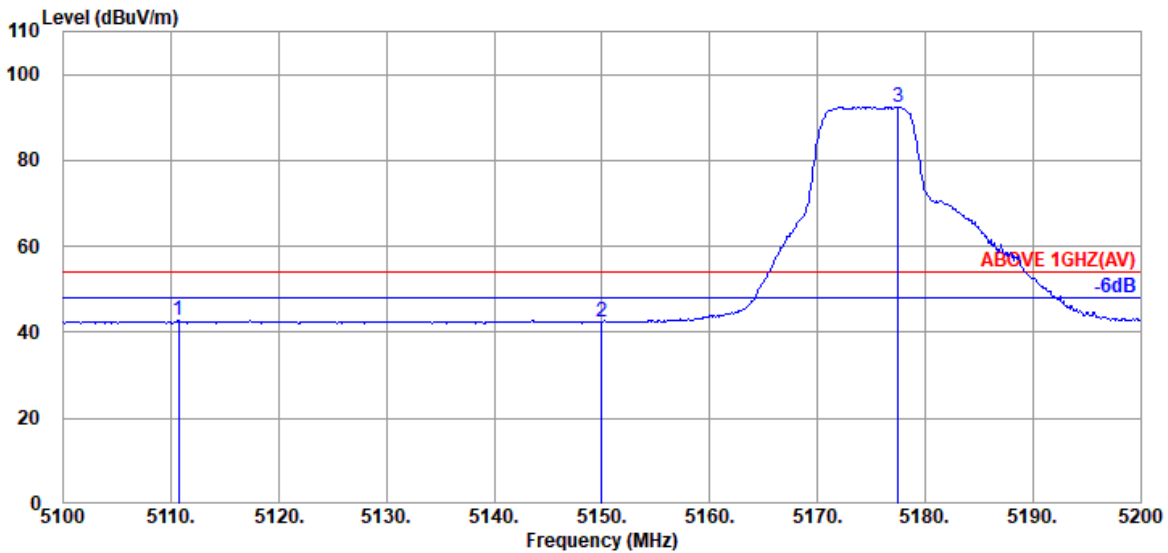


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.700	33.70	8.86	39.29	39.45	42.72	54.00	11.28	Average
5150.000	33.70	8.88	39.29	39.20	42.49	54.00	11.51	Average
@ 5177.500	33.70	8.90	39.28	89.18	92.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

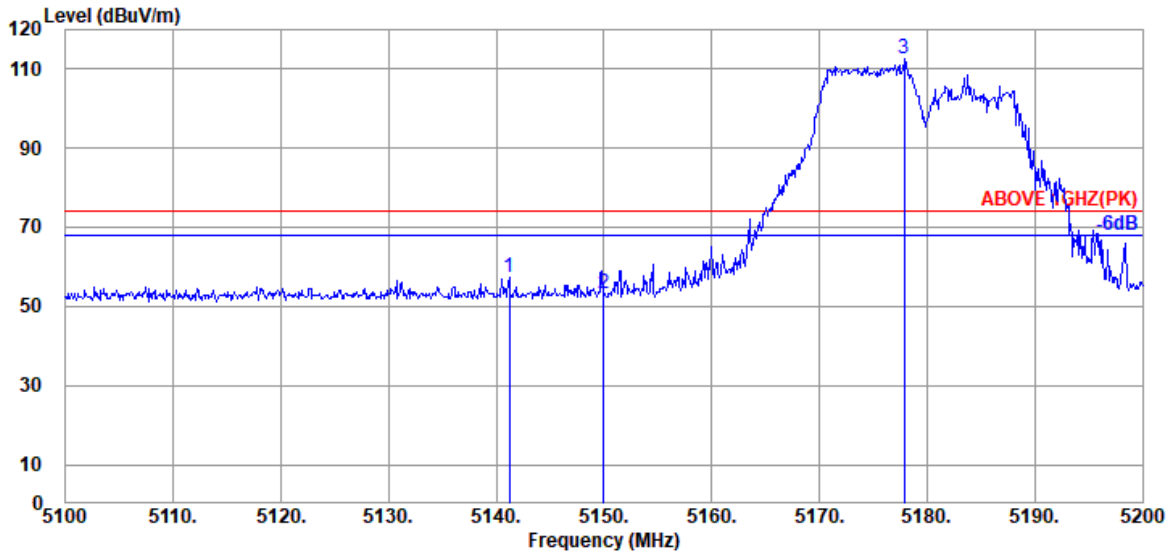

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.200	33.70	8.88	39.29	54.06	57.35	74.00	16.65	Peak
5150.000	33.70	8.88	39.29	49.78	53.07	74.00	20.93	Peak
@ 5177.900	33.70	8.90	39.28	109.12	112.44	---	---	Peak

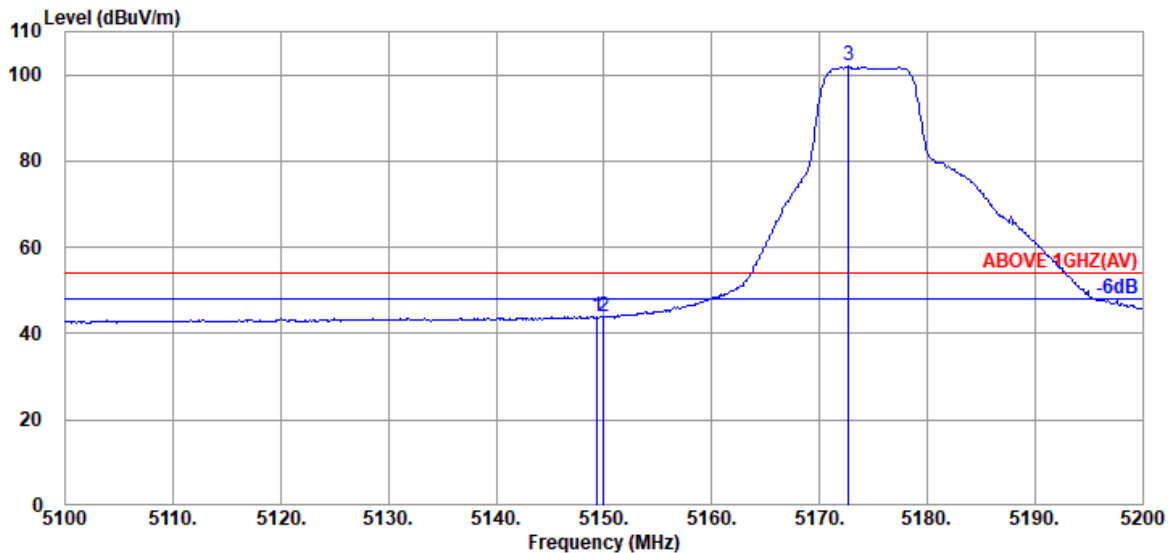

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.88	39.29	40.65	43.94	54.00	10.06	Average
5150.000	33.70	8.88	39.29	40.53	43.82	54.00	10.18	Average
@ 5172.700	33.70	8.90	39.29	98.63	101.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

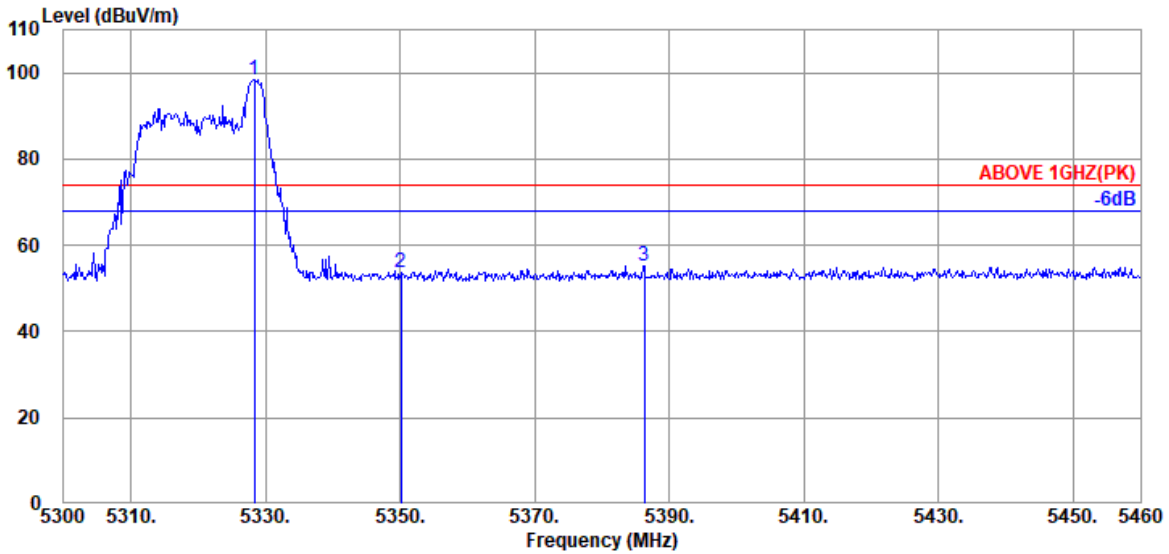

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	94.83	98.52	---	---	Peak
5350.080	33.90	8.99	39.27	49.90	53.52	74.00	20.48	Peak
5386.240	34.10	9.02	39.27	51.29	55.14	74.00	18.86	Peak

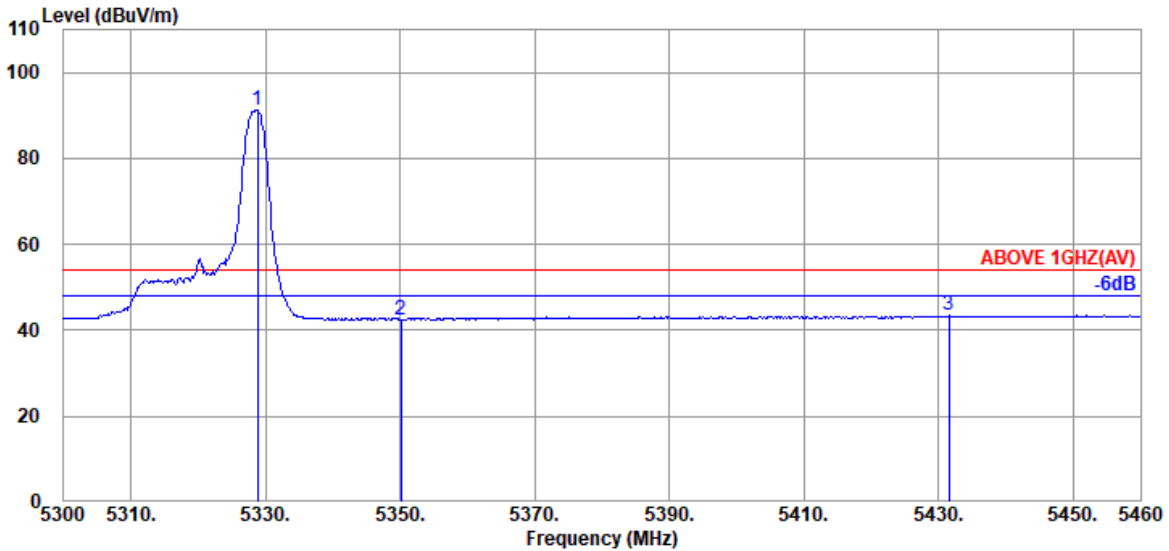

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.97	8.99	39.27	87.54	91.23	---	---	Average
5350.080	33.90	8.99	39.27	38.97	42.59	54.00	11.41	Average
5431.520	34.15	9.04	39.27	39.65	43.57	54.00	10.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

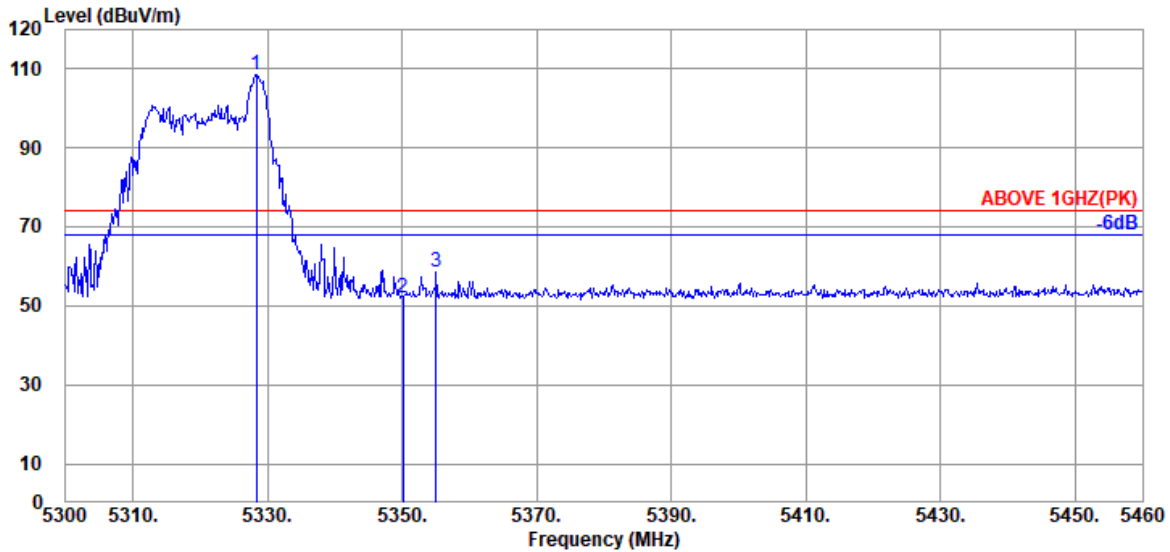

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	105.00	108.69	---	---	Peak
5350.080	33.90	8.99	39.27	48.34	51.96	74.00	22.04	Peak
5355.040	33.97	9.00	39.27	54.70	58.40	74.00	15.60	Peak

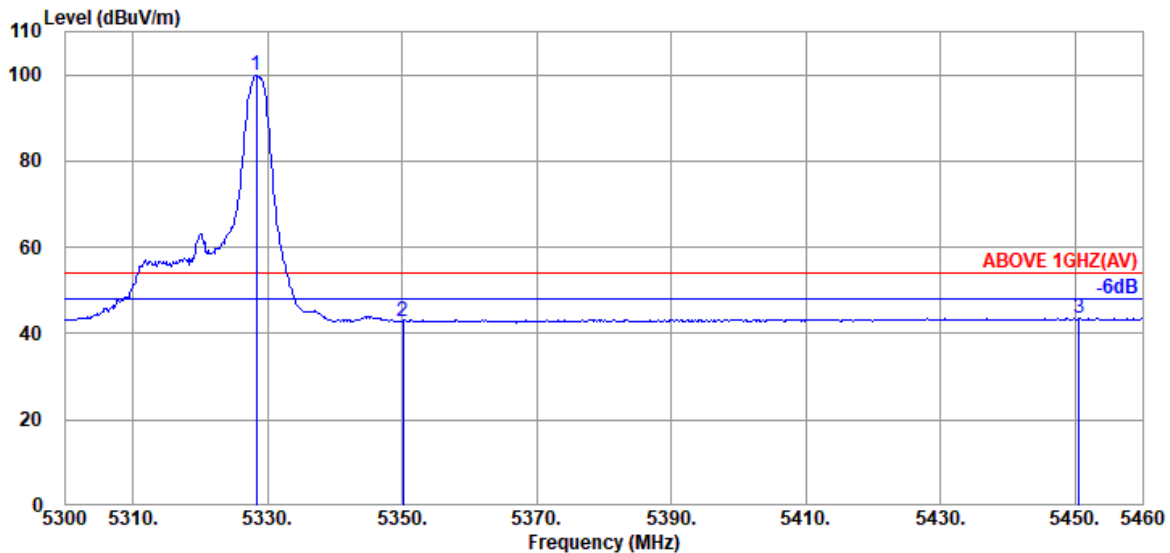


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	96.34	100.03	---	---	Average
5350.080	33.90	8.99	39.27	39.25	42.87	54.00	11.13	Average
5450.560	34.20	9.05	39.26	39.49	43.48	54.00	10.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

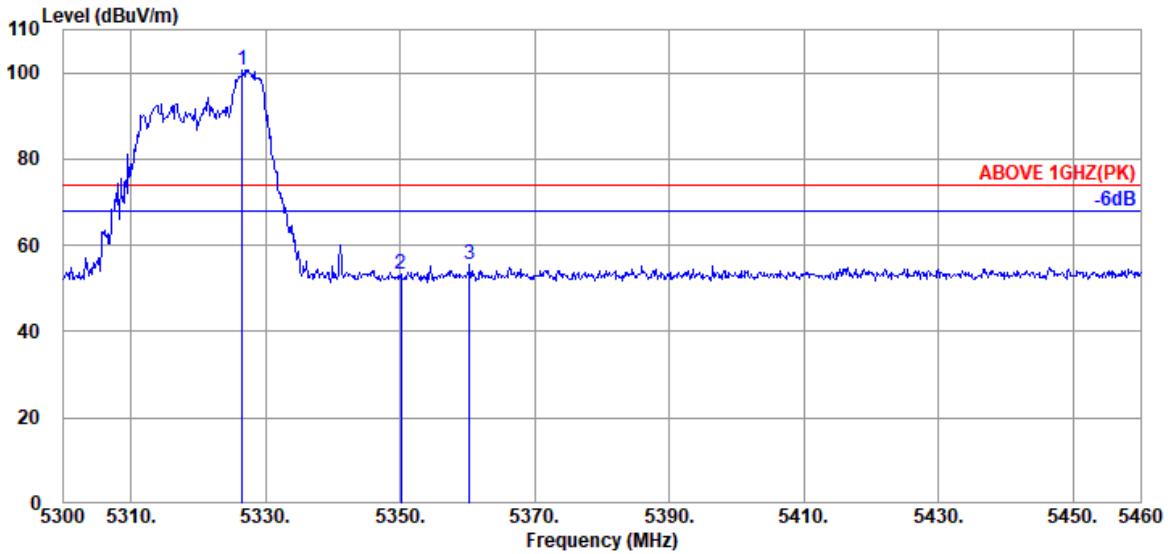

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	33.97	8.99	39.27	97.11	100.80	---	---	Peak
5350.080	33.90	8.99	39.27	49.58	53.20	74.00	20.80	Peak
5360.320	33.97	9.00	39.27	51.70	55.40	74.00	18.60	Peak

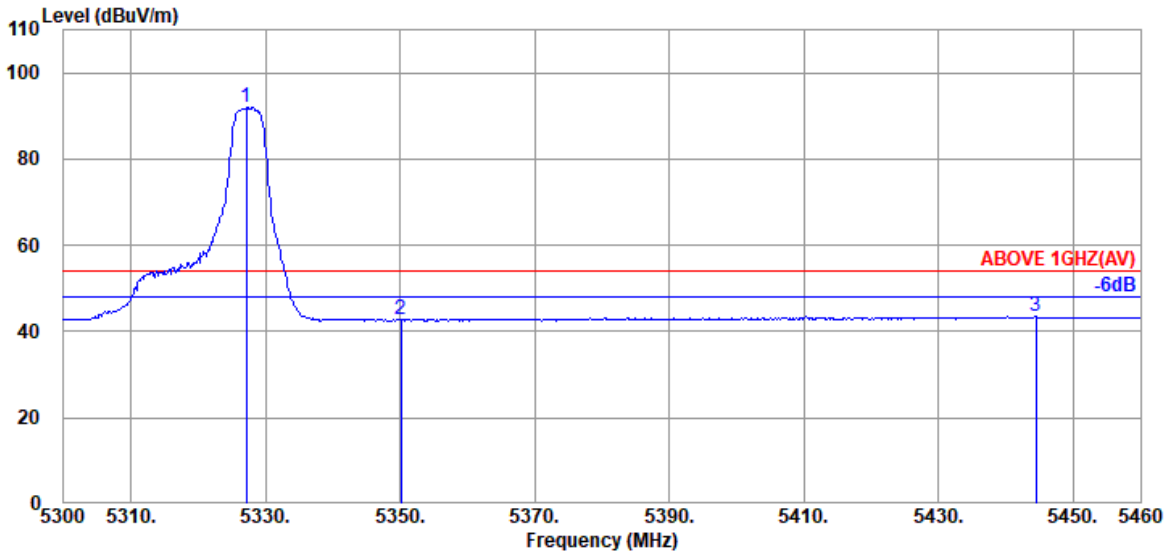


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.97	8.99	39.27	88.24	91.93	---	---	Average
5350.080	33.90	8.99	39.27	39.08	42.70	54.00	11.30	Average
5444.480	34.17	9.04	39.26	39.59	43.54	54.00	10.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

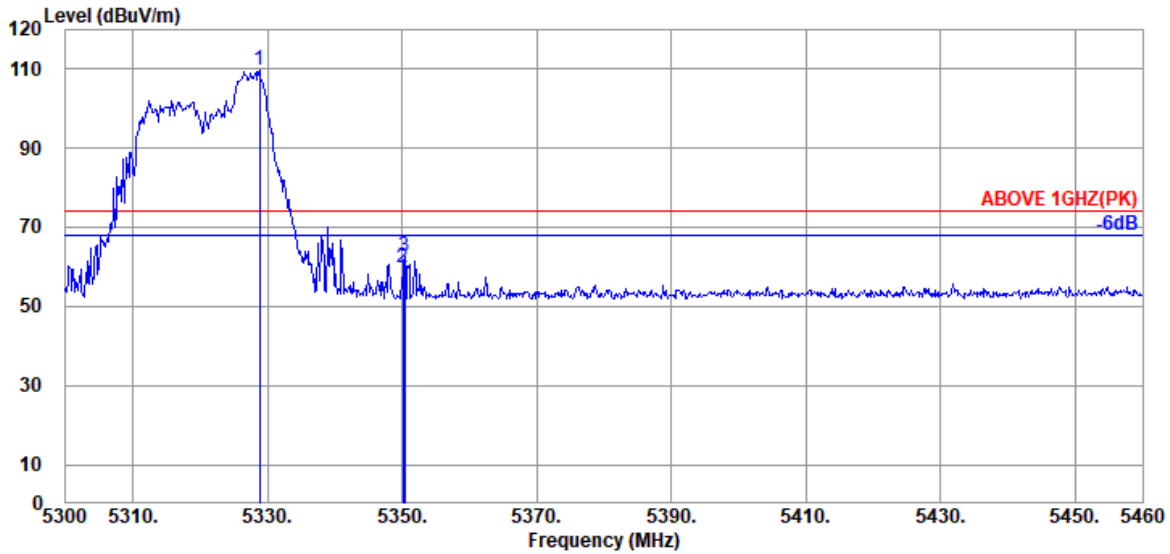

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.97	8.99	39.27	105.89	109.58	---	---	Peak
5350.080	33.90	8.99	39.27	56.19	59.81	74.00	14.19	Peak
5350.400	33.90	8.99	39.27	59.09	62.71	74.00	11.29	Peak

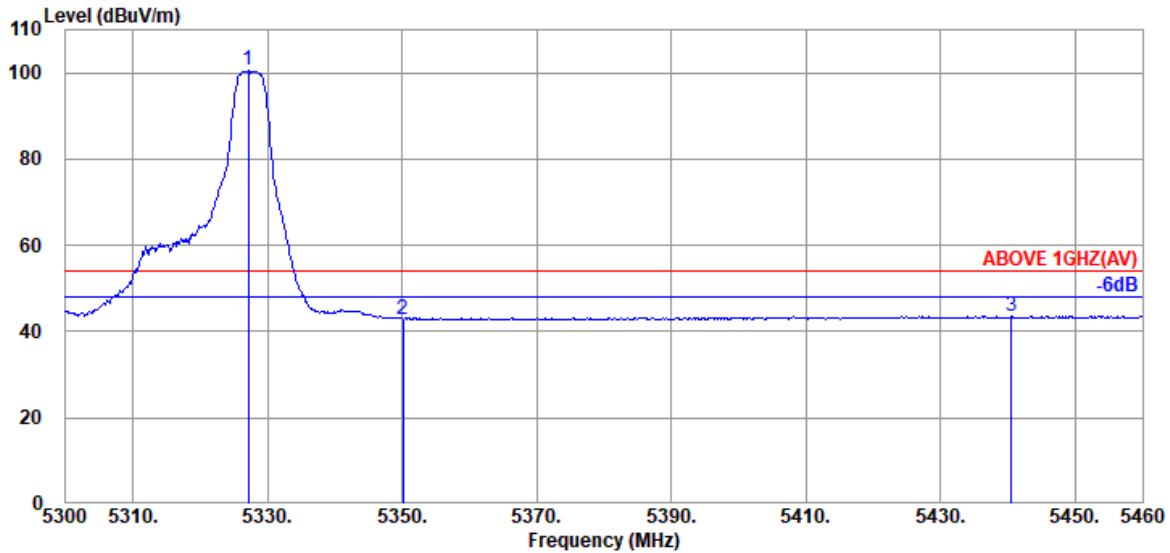

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.97	8.99	39.27	96.78	100.47	---	---	Average
5350.080	33.90	8.99	39.27	39.31	42.93	54.00	11.07	Average
5440.480	34.17	9.04	39.26	39.75	43.70	54.00	10.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

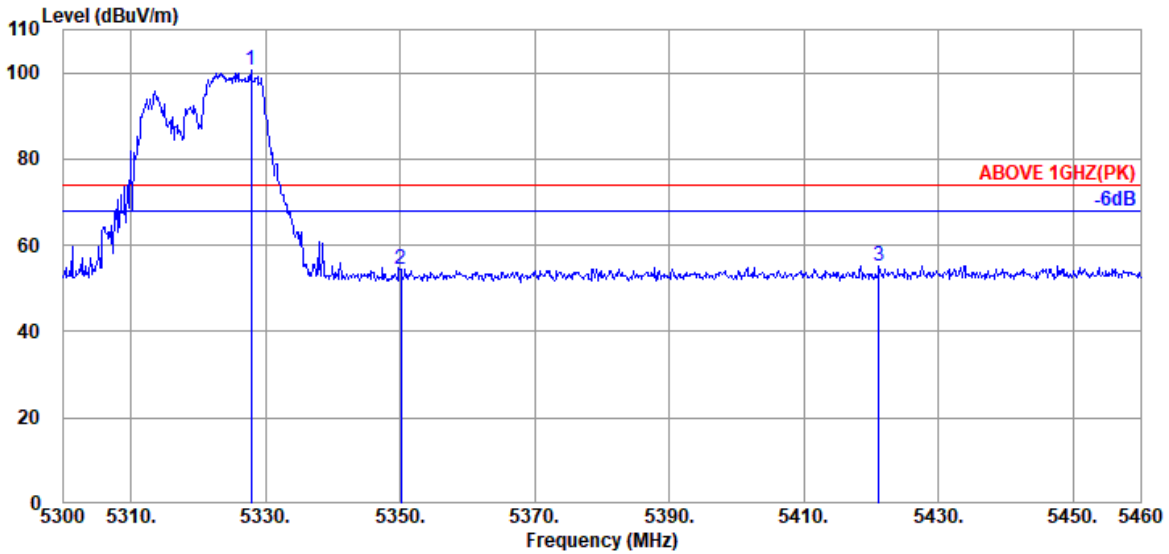

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.97	8.99	39.27	96.98	100.67	---	---	Peak
5350.080	33.90	8.99	39.27	50.95	54.57	74.00	19.43	Peak
5421.120	34.15	9.04	39.27	51.42	55.34	74.00	18.66	Peak

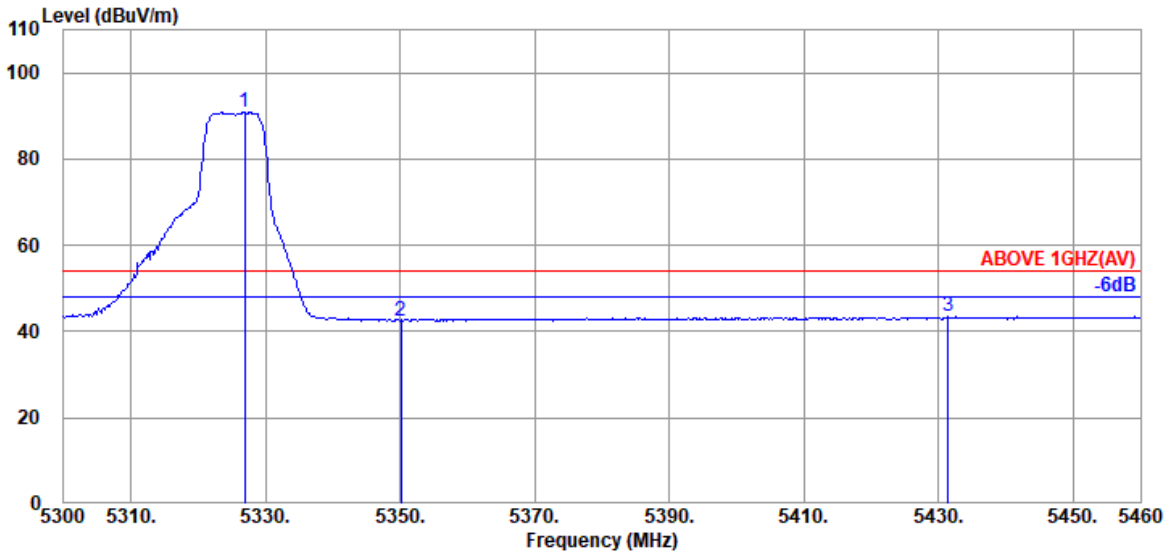

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	33.97	8.99	39.27	87.11	90.80	---	---	Average
5350.080	33.90	8.99	39.27	38.98	42.60	54.00	11.40	Average
5431.360	34.15	9.04	39.27	39.50	43.42	54.00	10.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

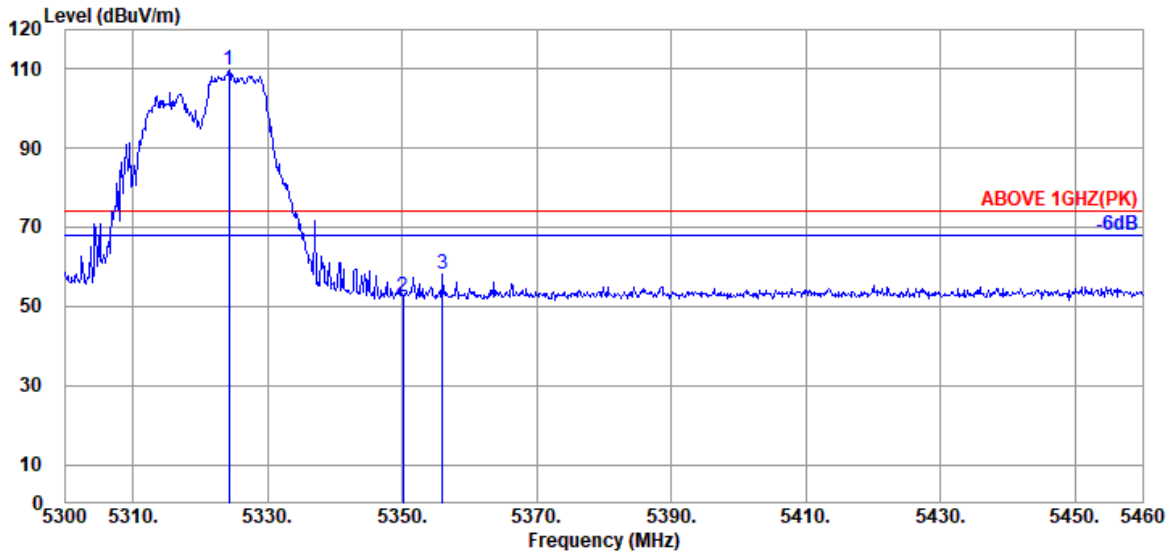

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	33.97	8.99	39.27	106.08	109.77	---	---	Peak
5350.080	33.90	8.99	39.27	48.67	52.29	74.00	21.71	Peak
5356.000	33.97	9.00	39.27	54.53	58.23	74.00	15.77	Peak

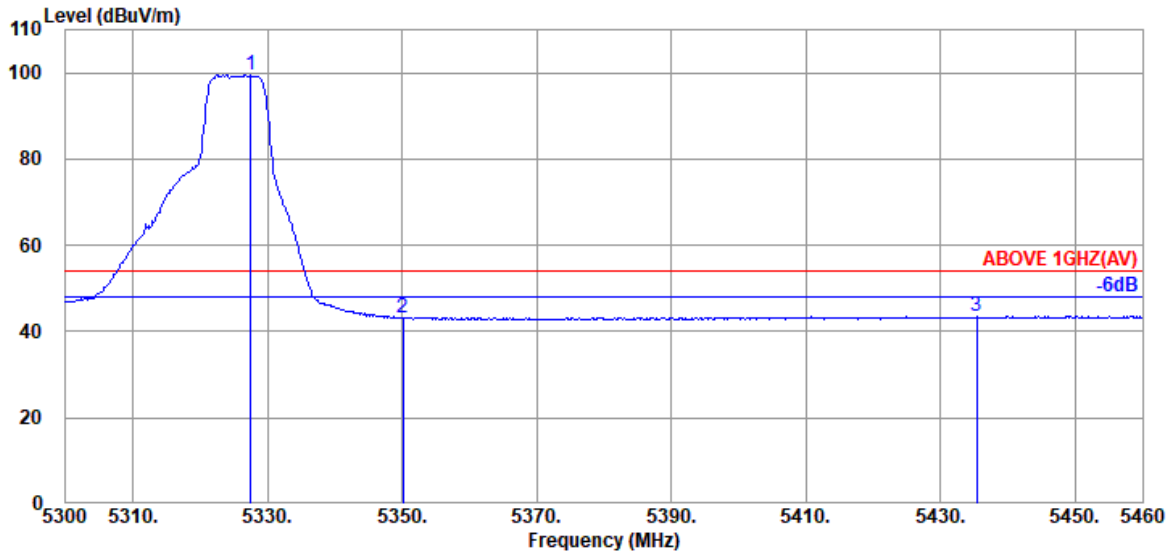

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	33.97	8.99	39.27	95.82	99.51	---	---	Average
5350.080	33.90	8.99	39.27	39.42	43.04	54.00	10.96	Average
5435.360	34.17	9.04	39.26	39.56	43.51	54.00	10.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

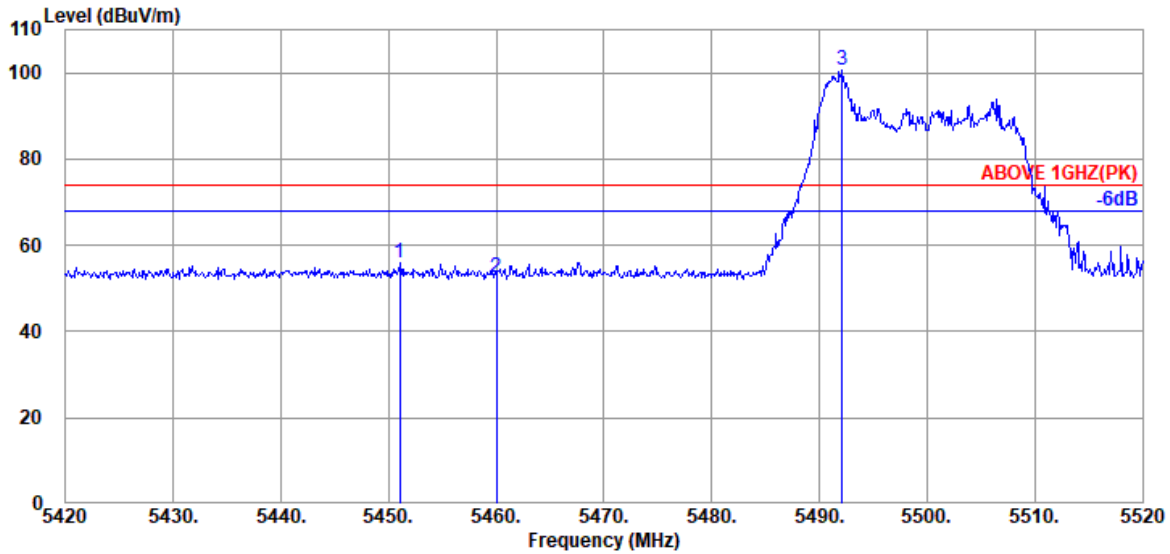

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.20	9.05	39.26	51.93	55.92	74.00	18.08	Peak
5460.000	34.20	9.05	39.26	48.68	52.67	74.00	21.33	Peak
@ 5492.100	34.13	9.07	39.26	96.60	100.54	---	---	Peak

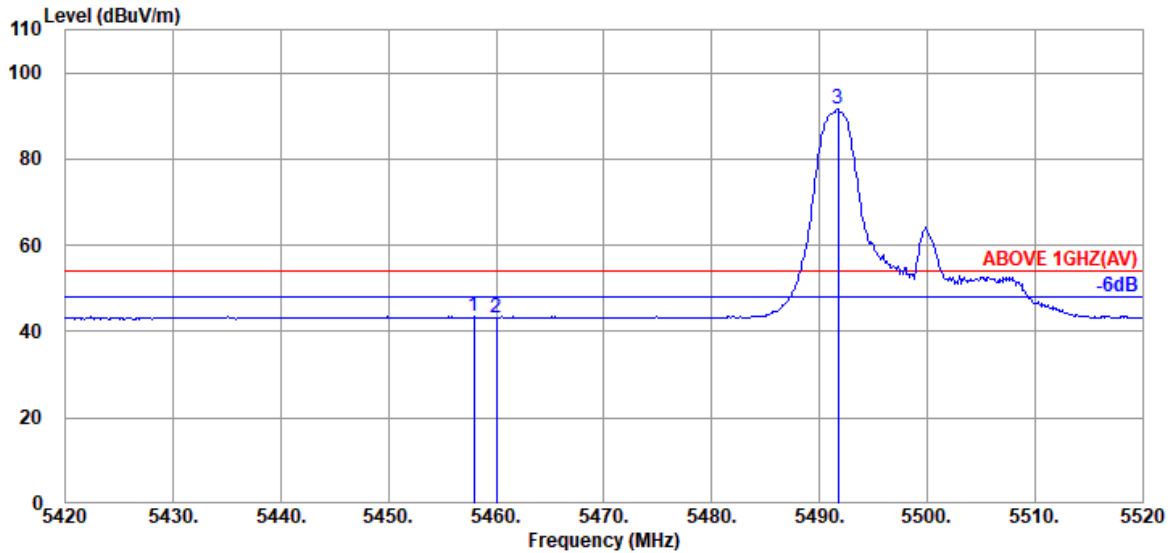


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.20	9.05	39.26	39.45	43.44	54.00	10.56	Average
5460.000	34.20	9.05	39.26	39.12	43.11	54.00	10.89	Average
@ 5491.700	34.13	9.07	39.26	87.60	91.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

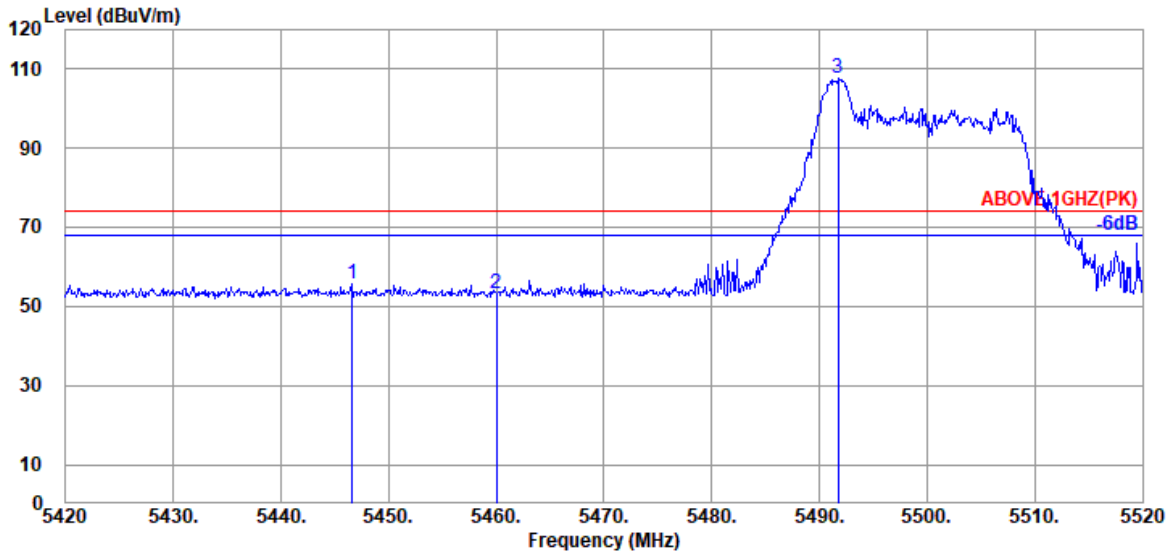

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.600	34.17	9.04	39.26	51.80	55.75	74.00	18.25	Peak
5460.000	34.20	9.05	39.26	49.32	53.31	74.00	20.69	Peak
@ 5491.700	34.13	9.07	39.26	103.92	107.86	---	---	Peak

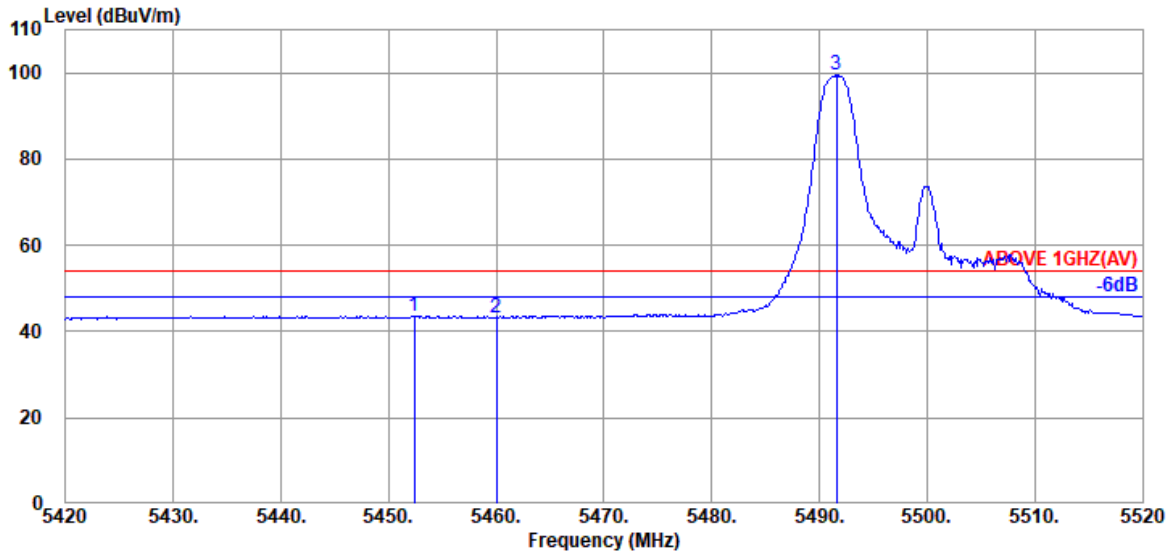


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.400	34.20	9.05	39.26	39.66	43.65	54.00	10.35	Average
5460.000	34.20	9.05	39.26	39.26	43.25	54.00	10.75	Average
@ 5491.600	34.13	9.07	39.26	95.60	99.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

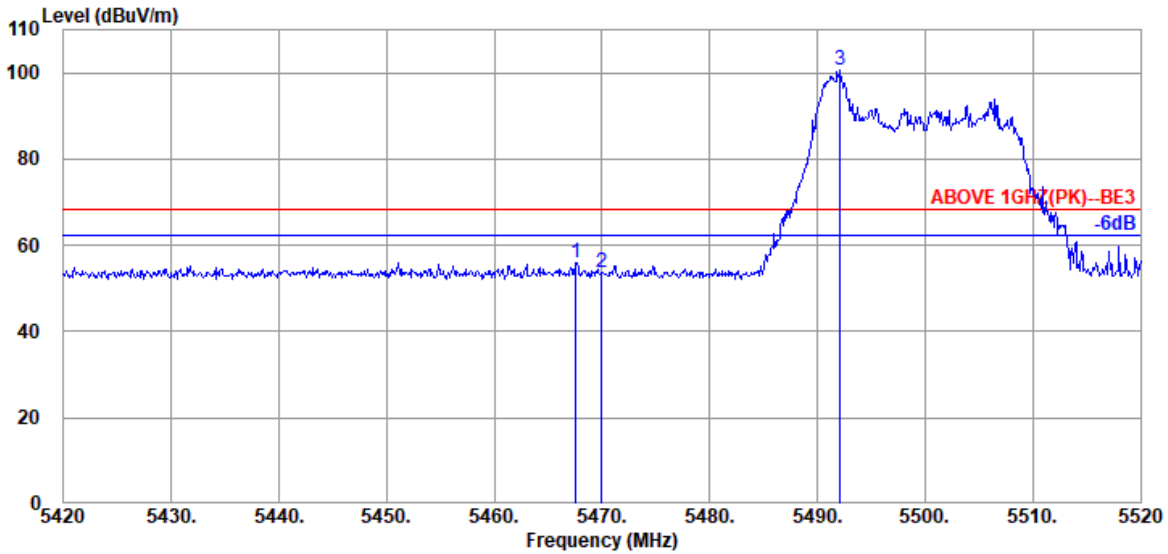

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.17	9.06	39.26	52.08	56.05	68.20	12.15	Peak
5470.000	34.17	9.06	39.26	49.62	53.59	68.20	14.61	Peak
@ 5492.100	34.13	9.07	39.26	96.60	100.54	---	---	Peak

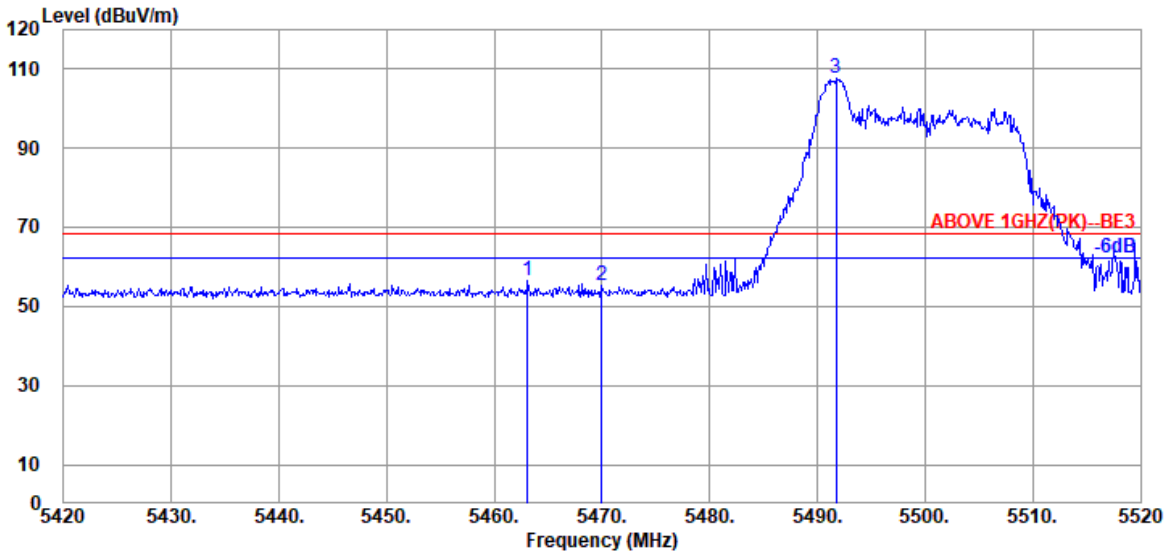


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.20	9.05	39.26	52.50	56.49	68.20	11.71	Peak
5470.000	34.17	9.06	39.26	51.39	55.36	68.20	12.84	Peak
@ 5491.700	34.13	9.07	39.26	103.92	107.86	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

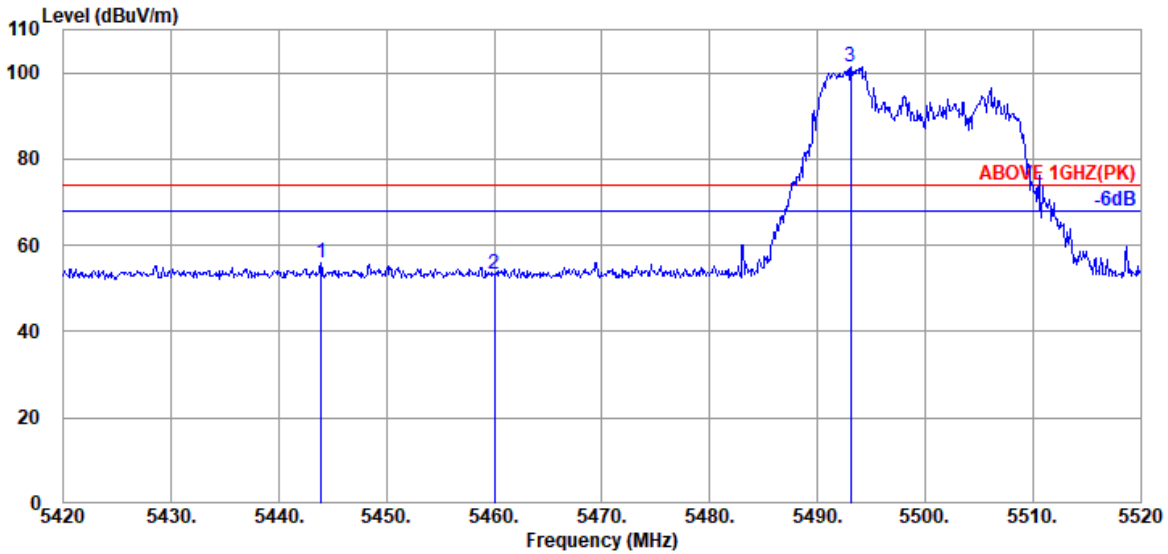

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.900	34.17	9.04	39.26	51.90	55.85	74.00	18.15	Peak
5460.000	34.20	9.05	39.26	49.42	53.41	74.00	20.59	Peak
@ 5493.100	34.13	9.07	39.26	97.54	101.48	---	---	Peak

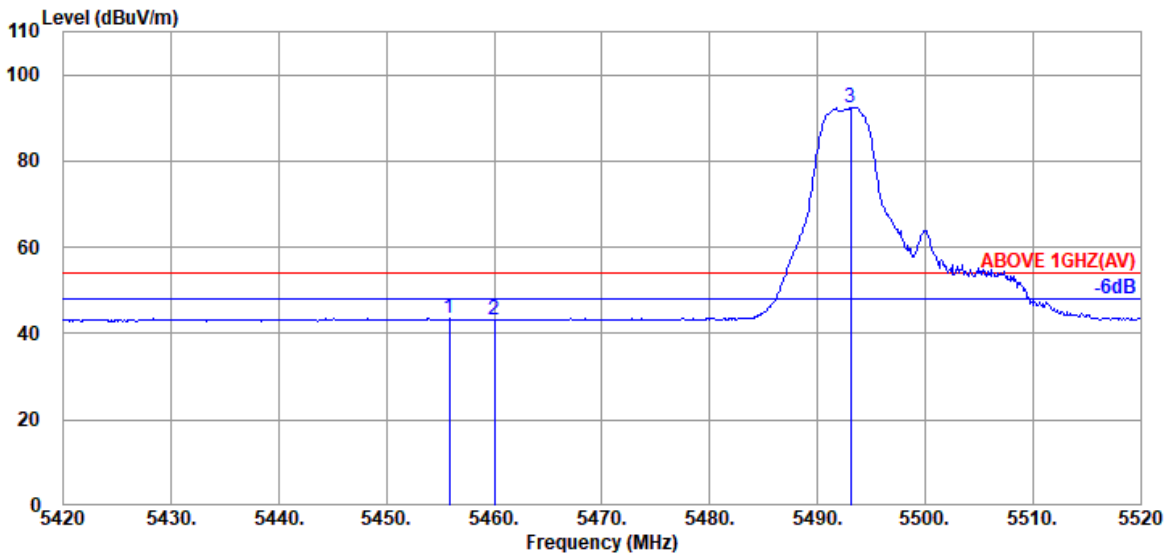


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.20	9.05	39.26	39.50	43.49	54.00	10.51	Average
5460.000	34.20	9.05	39.26	39.28	43.27	54.00	10.73	Average
@ 5493.100	34.13	9.07	39.26	88.59	92.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

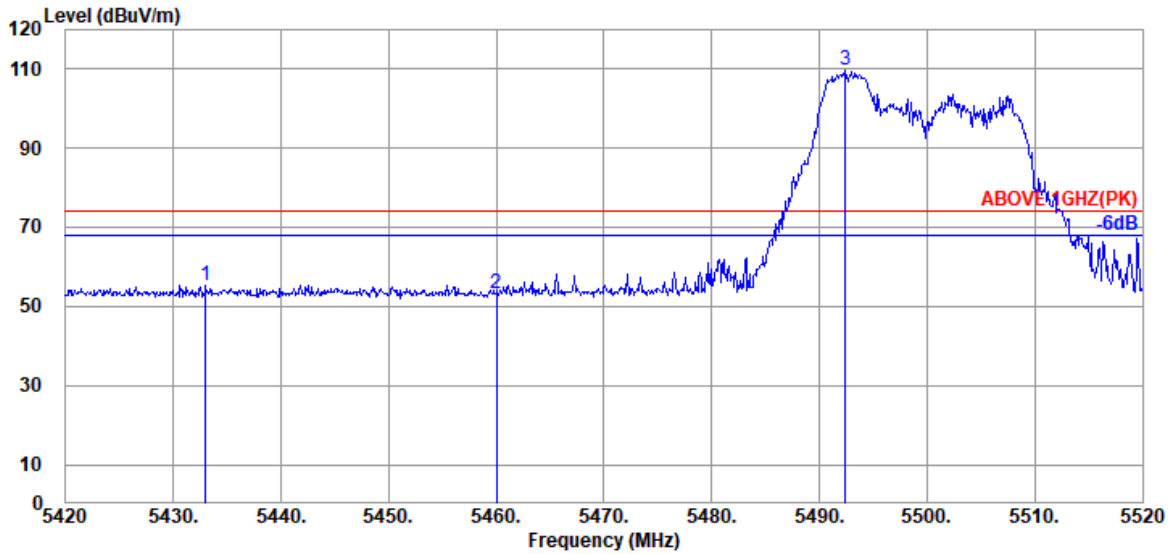

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.000	34.17	9.04	39.27	51.22	55.16	74.00	18.84	Peak
5460.000	34.20	9.05	39.26	49.30	53.29	74.00	20.71	Peak
@ 5492.400	34.13	9.07	39.26	105.79	109.73	---	---	Peak

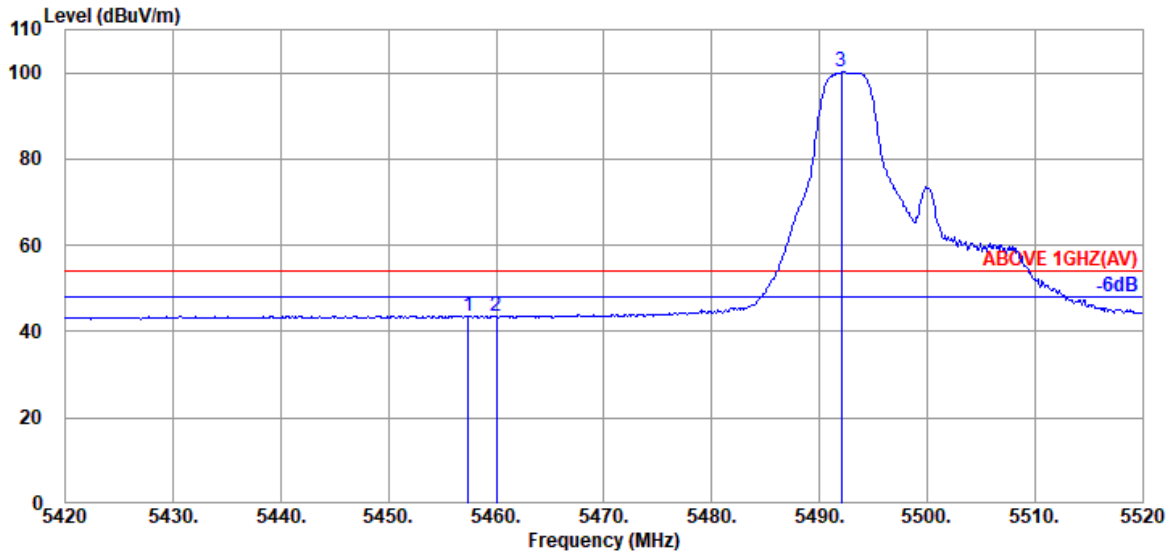

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.20	9.05	39.26	39.64	43.63	54.00	10.37	Average
5460.000	34.20	9.05	39.26	39.39	43.38	54.00	10.62	Average
@ 5492.000	34.13	9.07	39.26	96.25	100.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

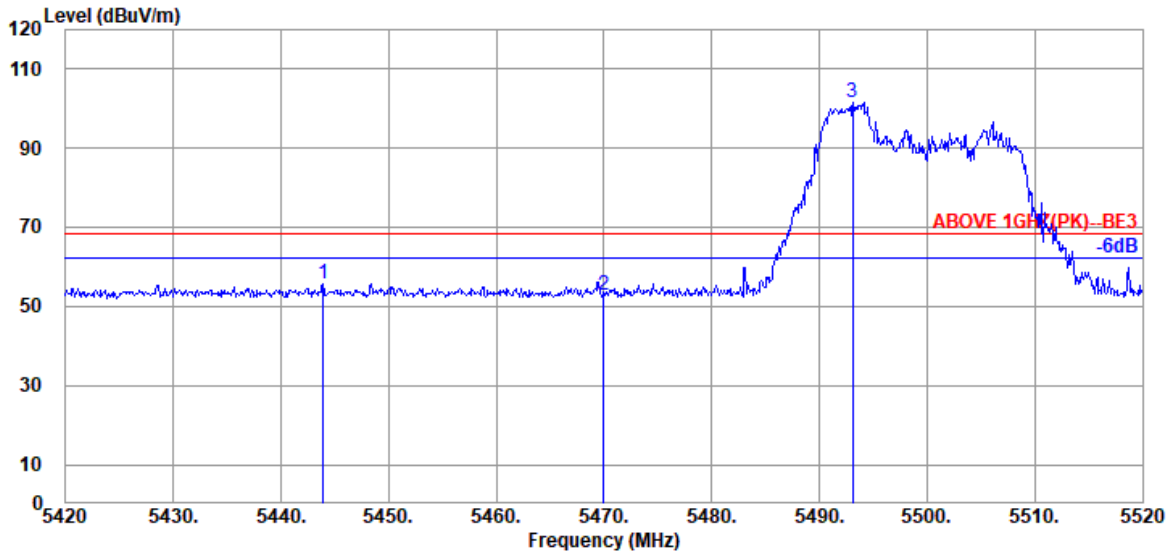

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.900	34.17	9.04	39.26	51.90	55.85	68.20	12.35	Peak
5470.000	34.17	9.06	39.26	48.95	52.92	68.20	15.28	Peak
@ 5493.100	34.13	9.07	39.26	97.54	101.48	---	---	Peak

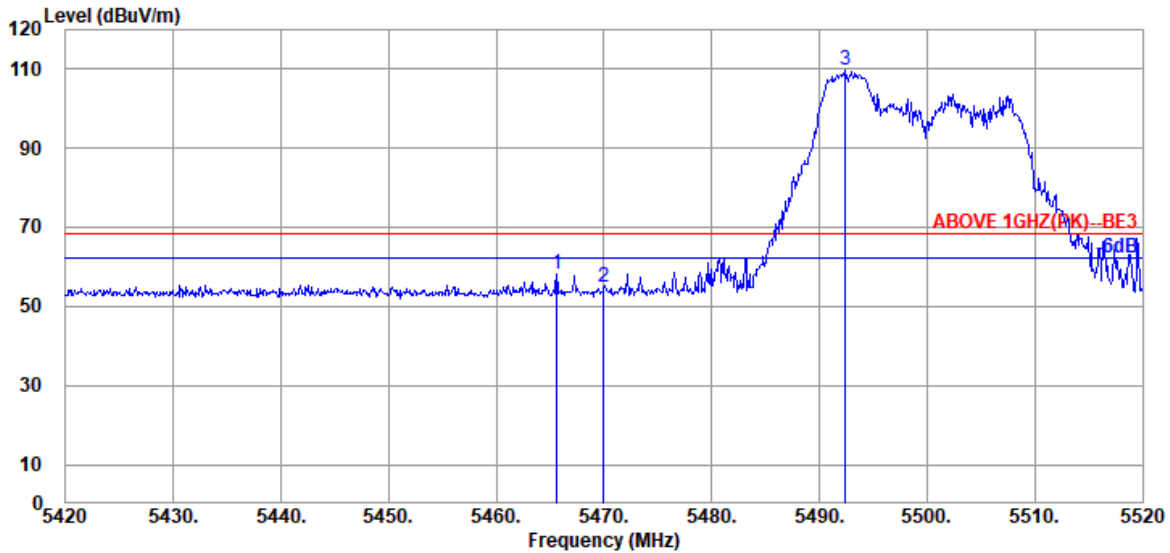


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	9.06	39.26	54.27	58.24	68.20	9.96	Peak
5470.000	34.17	9.06	39.26	50.94	54.91	68.20	13.29	Peak
@ 5492.400	34.13	9.07	39.26	105.79	109.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

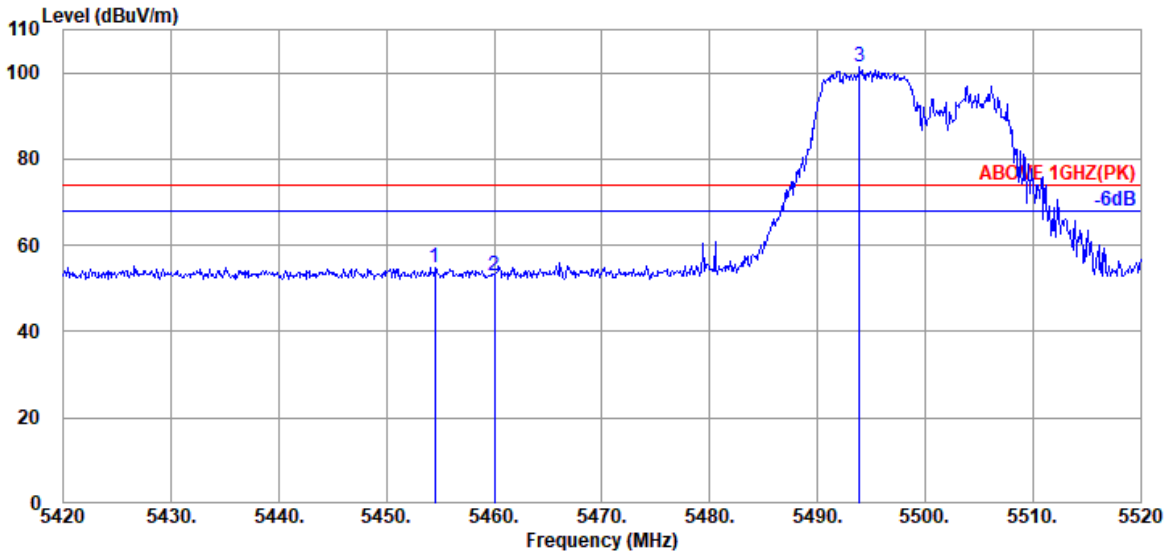

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.20	9.05	39.26	50.91	54.90	74.00	19.10	Peak
5460.000	34.20	9.05	39.26	49.03	53.02	74.00	20.98	Peak
@ 5493.900	34.13	9.07	39.26	97.56	101.50	---	---	Peak

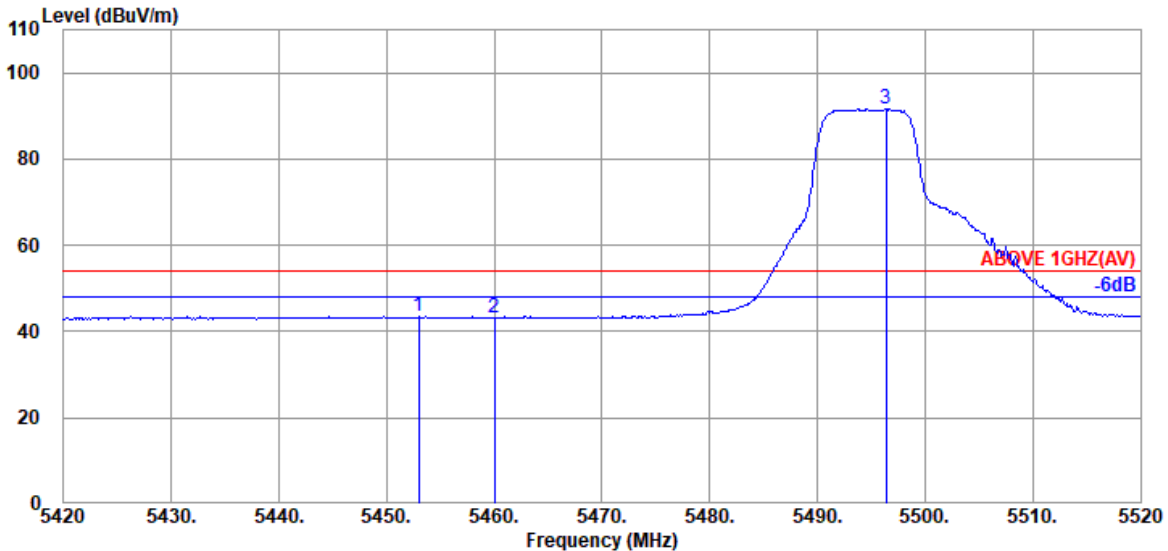


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.20	9.05	39.26	39.54	43.53	54.00	10.47	Average
5460.000	34.20	9.05	39.26	39.12	43.11	54.00	10.89	Average
@ 5496.400	34.10	9.08	39.26	87.86	91.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

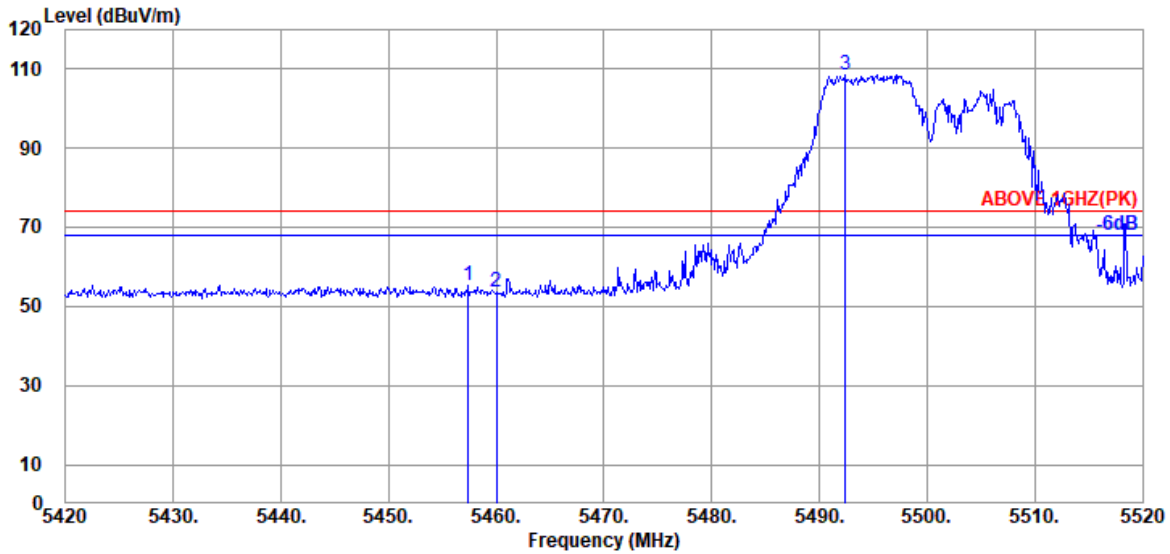

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.20	9.05	39.26	51.47	55.46	74.00	18.54	Peak
5460.000	34.20	9.05	39.26	49.68	53.67	74.00	20.33	Peak
@ 5492.400	34.13	9.07	39.26	104.67	108.61	---	---	Peak

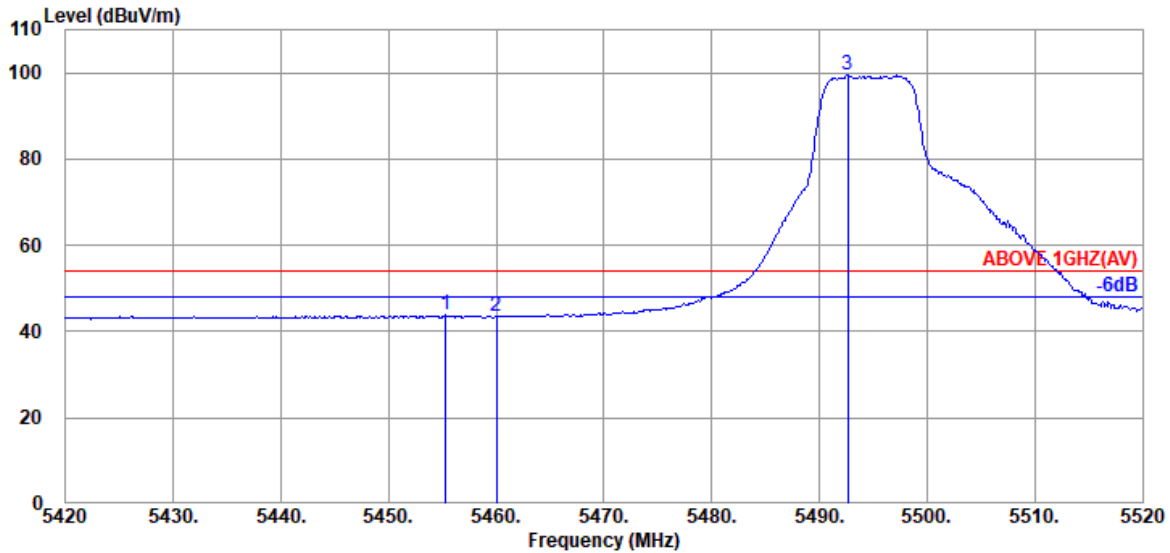


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.300	34.20	9.05	39.26	39.83	43.82	54.00	10.18	Average
5460.000	34.20	9.05	39.26	39.41	43.40	54.00	10.60	Average
@ 5492.600	34.13	9.07	39.26	95.51	99.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

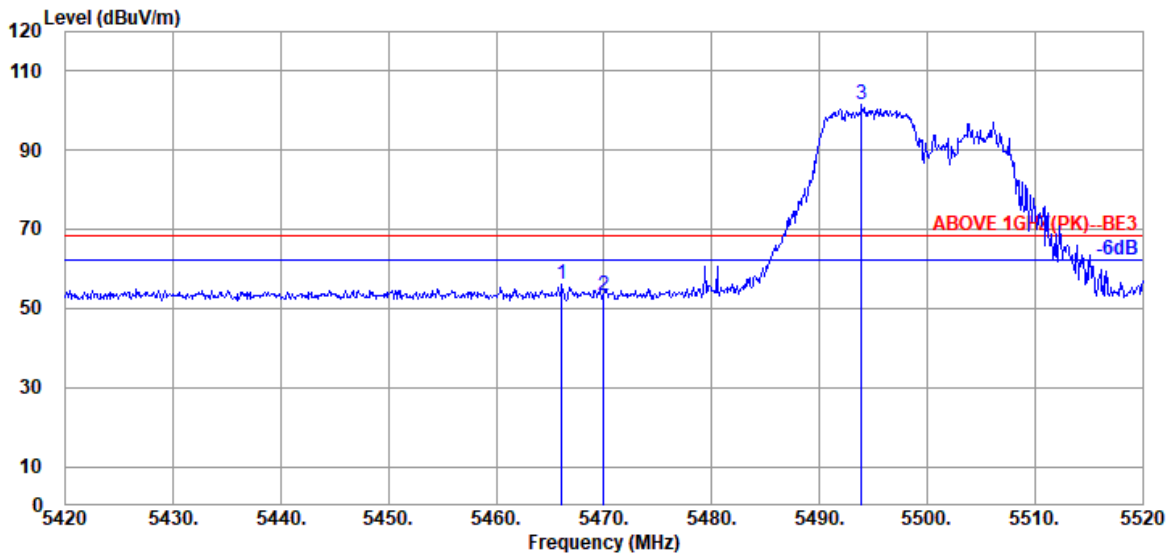

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	9.06	39.26	51.97	55.94	68.20	12.26	Peak
5470.000	34.17	9.06	39.26	49.47	53.44	68.20	14.76	Peak
@ 5493.900	34.13	9.07	39.26	97.56	101.50	---	---	Peak

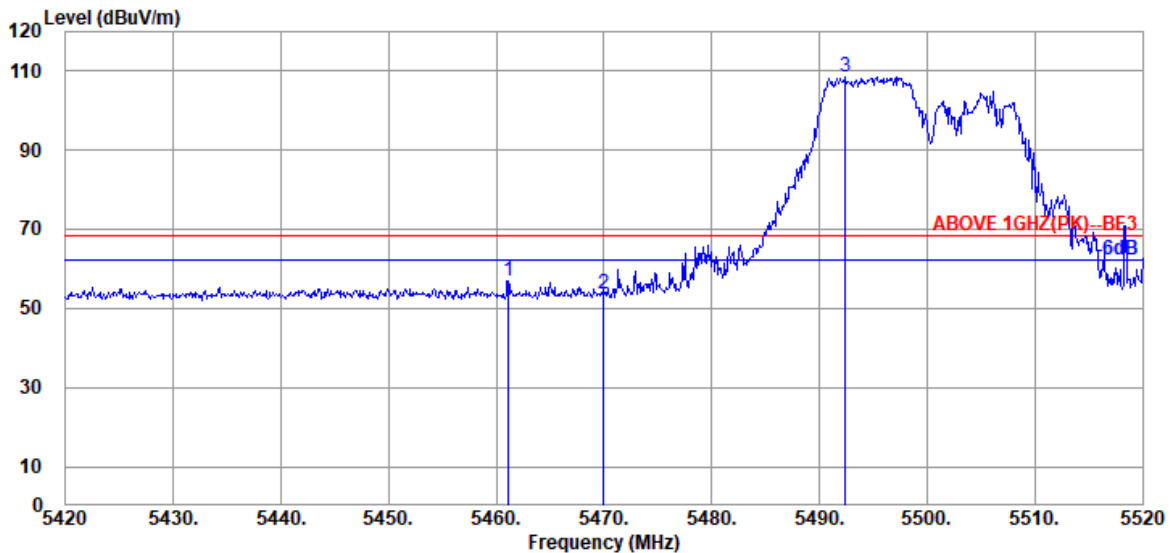


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.100	34.20	9.05	39.26	52.87	56.86	68.20	11.34	Peak
5470.000	34.17	9.06	39.26	49.61	53.58	68.20	14.62	Peak
@ 5492.400	34.13	9.07	39.26	104.67	108.61	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

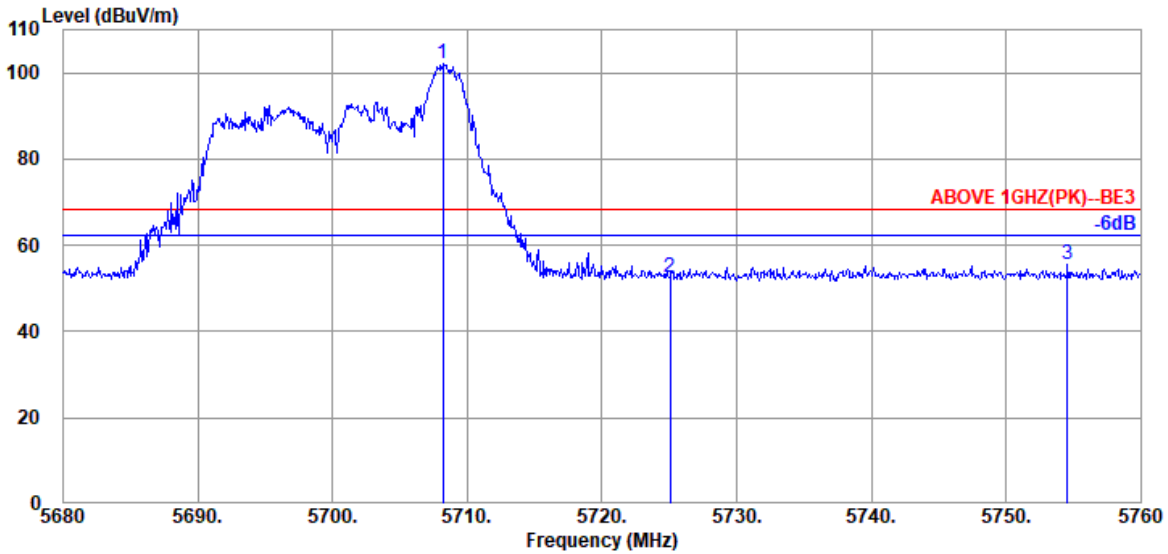

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.160	33.80	9.19	39.30	98.40	102.09	---	---	Peak
5725.040	33.80	9.20	39.30	48.86	52.56	68.20	15.64	Peak
5754.560	33.80	9.20	39.31	51.73	55.42	68.20	12.78	Peak

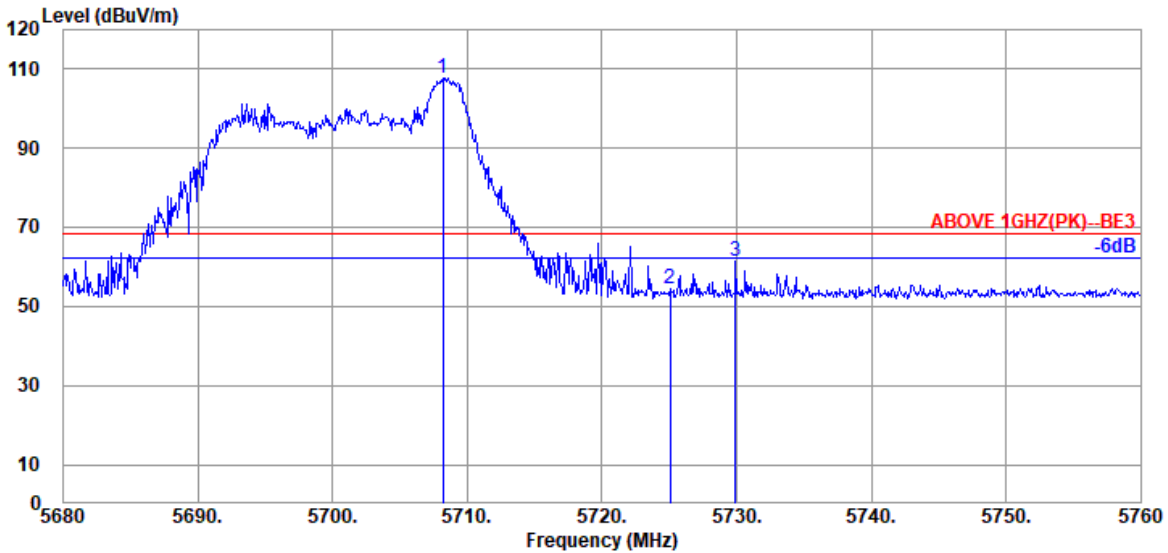


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.160	33.80	9.19	39.30	104.05	107.74	---	---	Peak
5725.040	33.80	9.20	39.30	50.92	54.62	68.20	13.58	Peak
5729.920	33.80	9.20	39.31	57.63	61.32	68.20	6.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

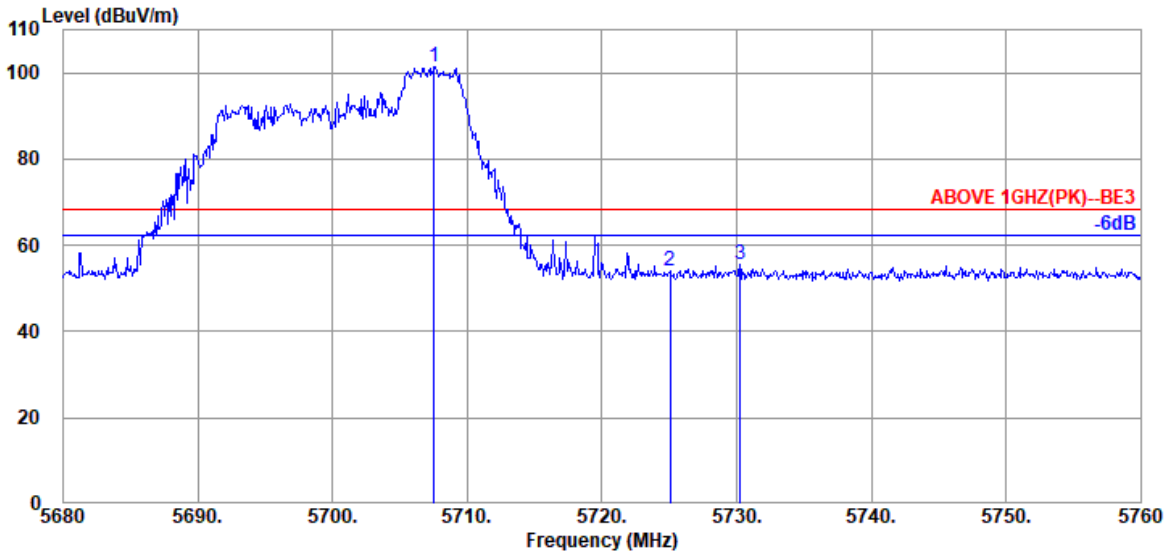

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.520	33.80	9.19	39.30	97.70	101.39	---	---	Peak
5725.040	33.80	9.20	39.30	50.17	53.87	68.20	14.33	Peak
5730.240	33.80	9.20	39.31	51.95	55.64	68.20	12.56	Peak

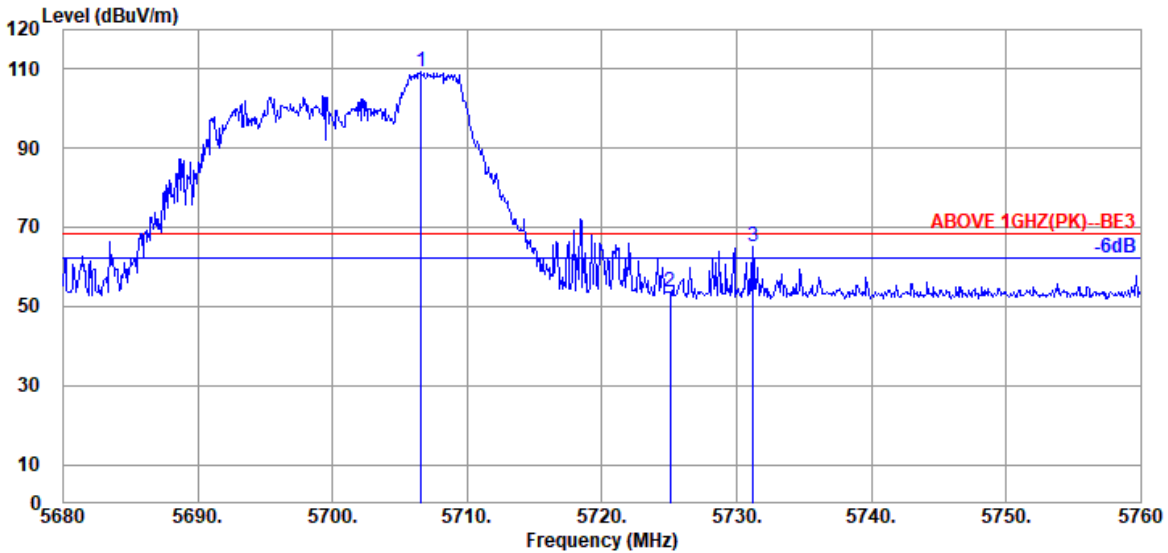

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.560	33.80	9.19	39.30	105.53	109.22	---	---	Peak
5725.040	33.80	9.20	39.30	49.77	53.47	68.20	14.73	Peak
5731.200	33.80	9.20	39.31	61.25	64.94	68.20	3.26	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

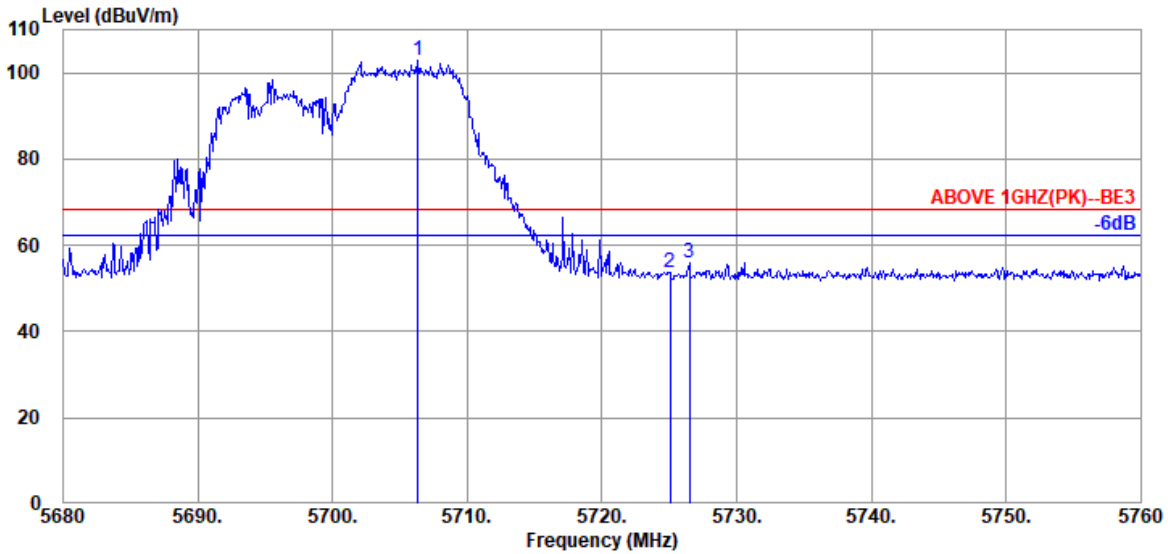

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.320	33.80	9.19	39.30	99.02	102.71	---	---	Peak
5725.040	33.80	9.20	39.30	49.80	53.50	68.20	14.70	Peak
5726.480	33.80	9.20	39.31	52.30	55.99	68.20	12.21	Peak

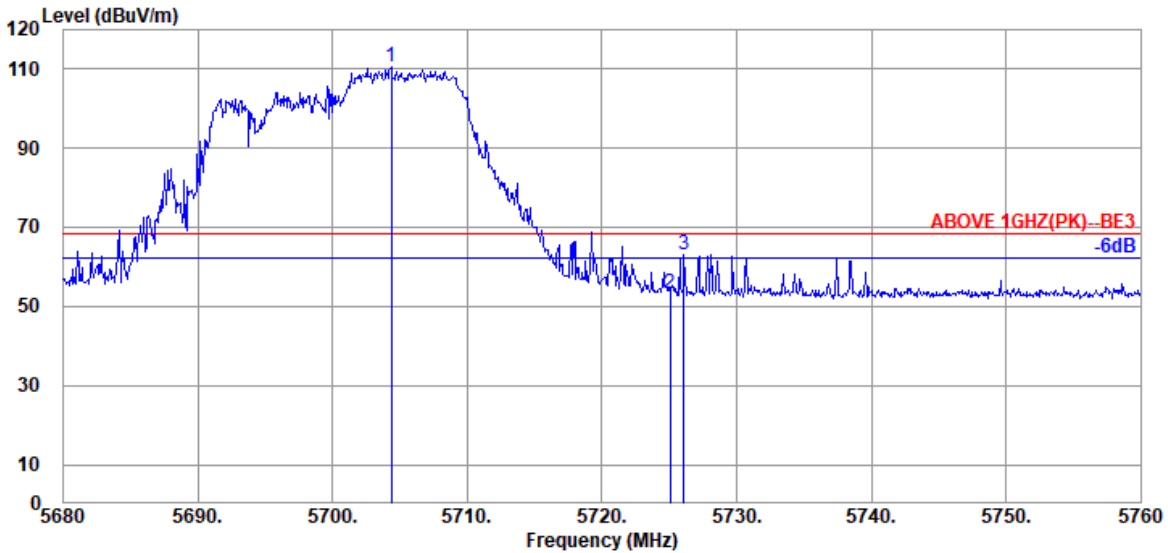


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.320	33.80	9.18	39.30	107.01	110.69	---	---	Peak
5725.040	33.80	9.20	39.30	49.50	53.20	68.20	15.00	Peak
5726.080	33.80	9.20	39.30	59.36	63.06	68.20	5.14	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

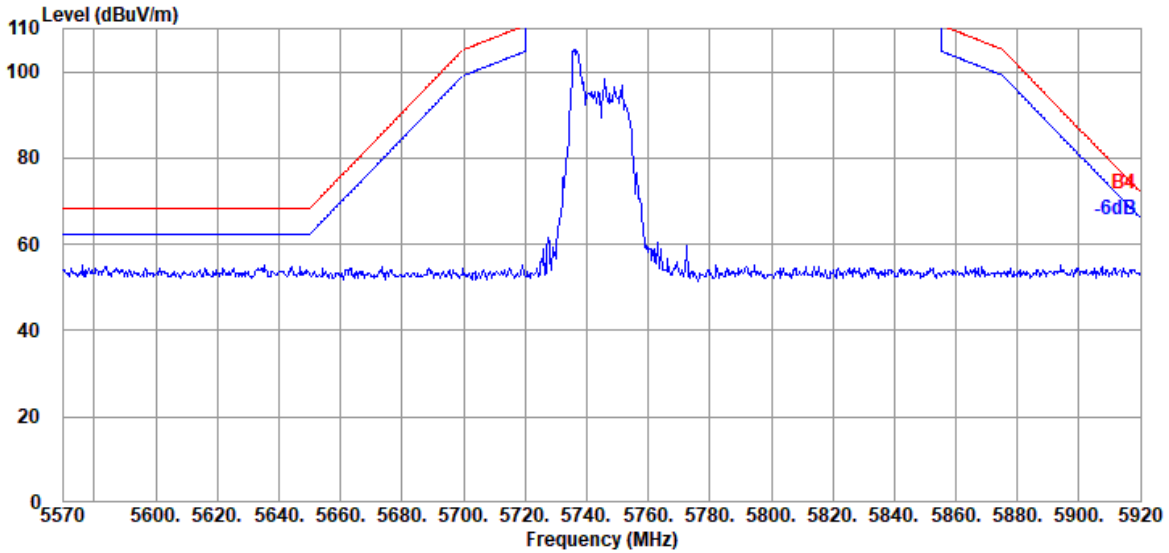


Antenna at Vertical Polarization

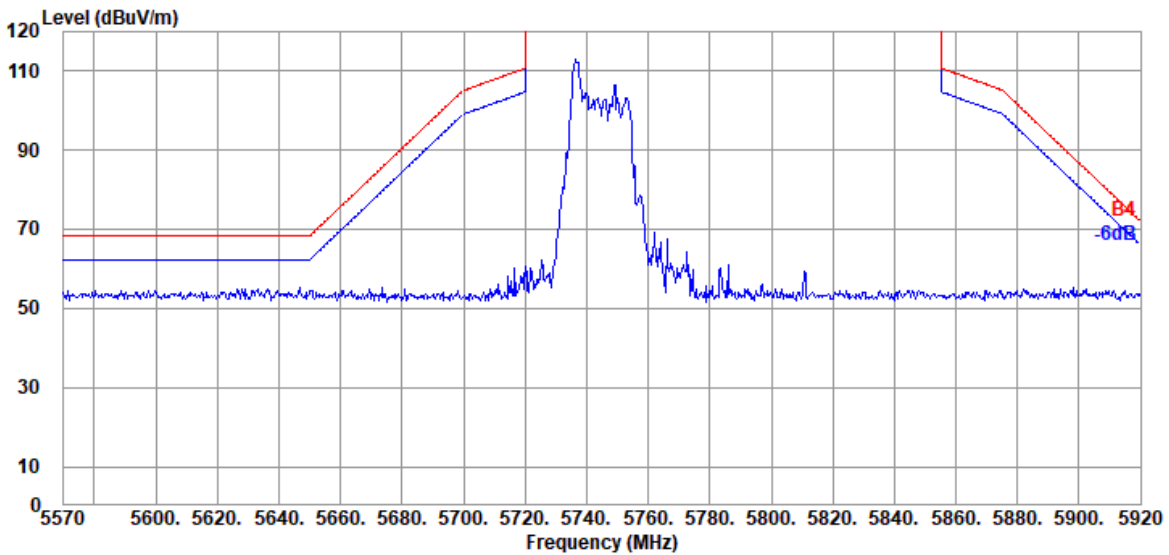


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

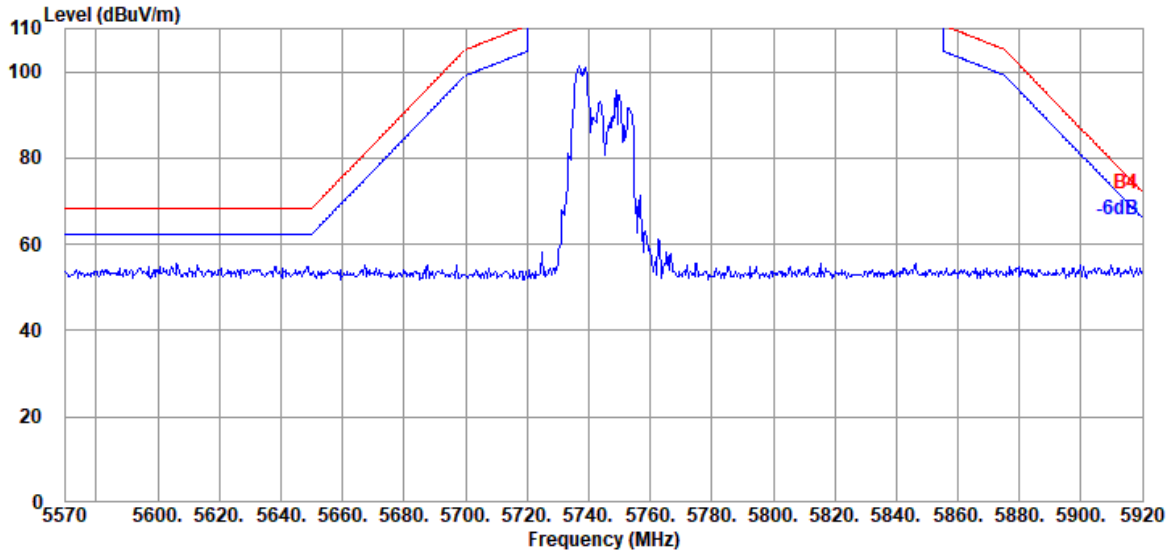


Antenna at Vertical Polarization

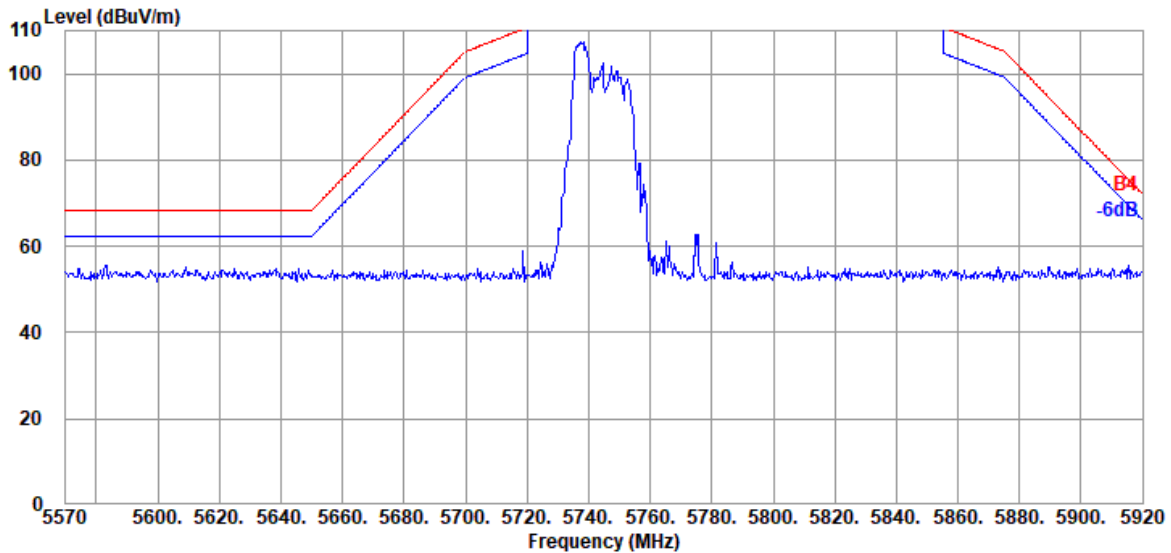


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

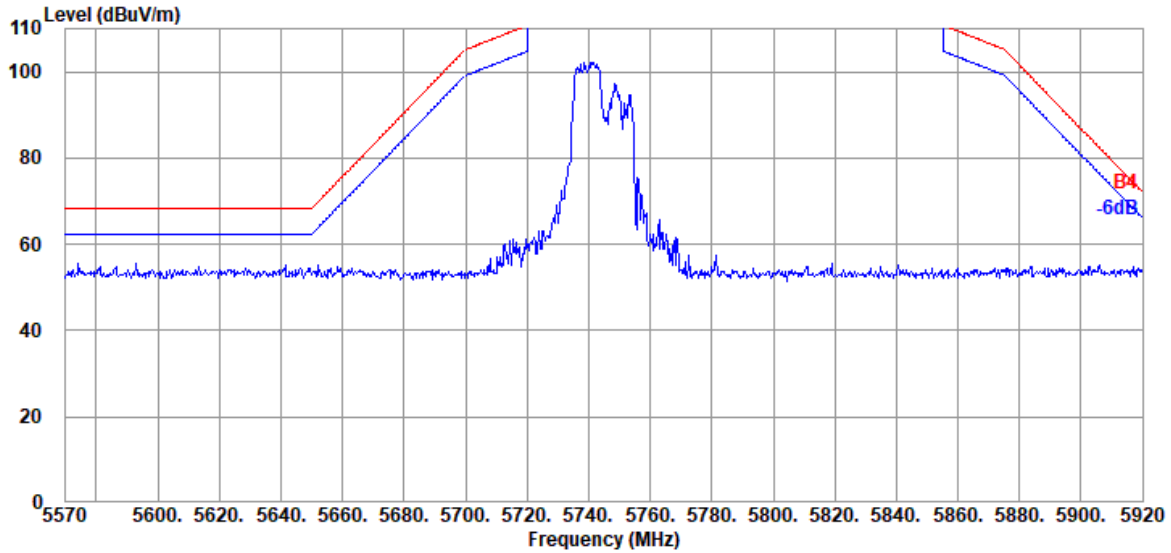


Antenna at Vertical Polarization

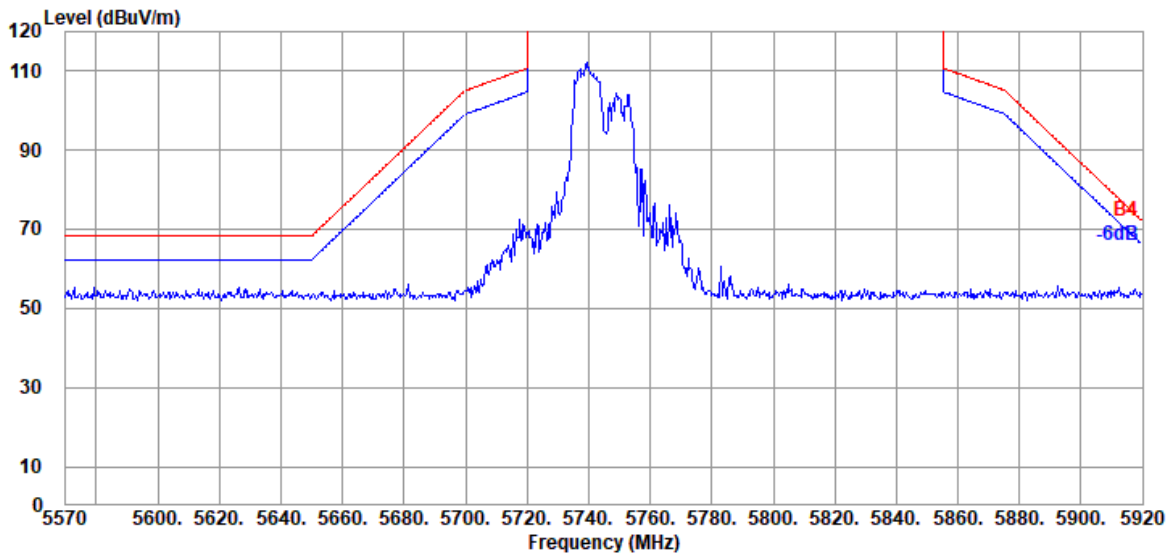


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

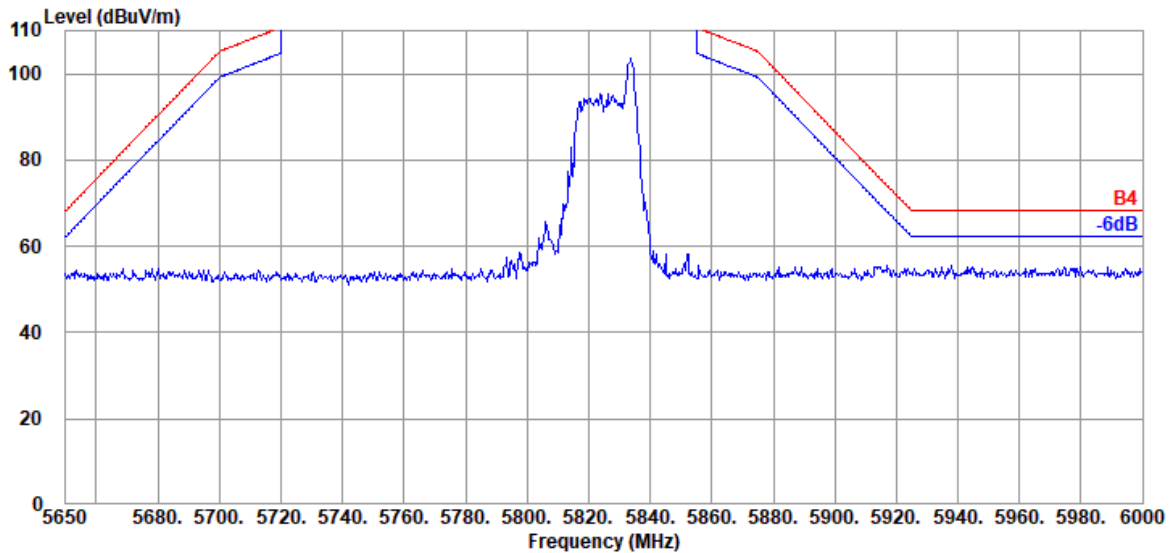


Antenna at Vertical Polarization

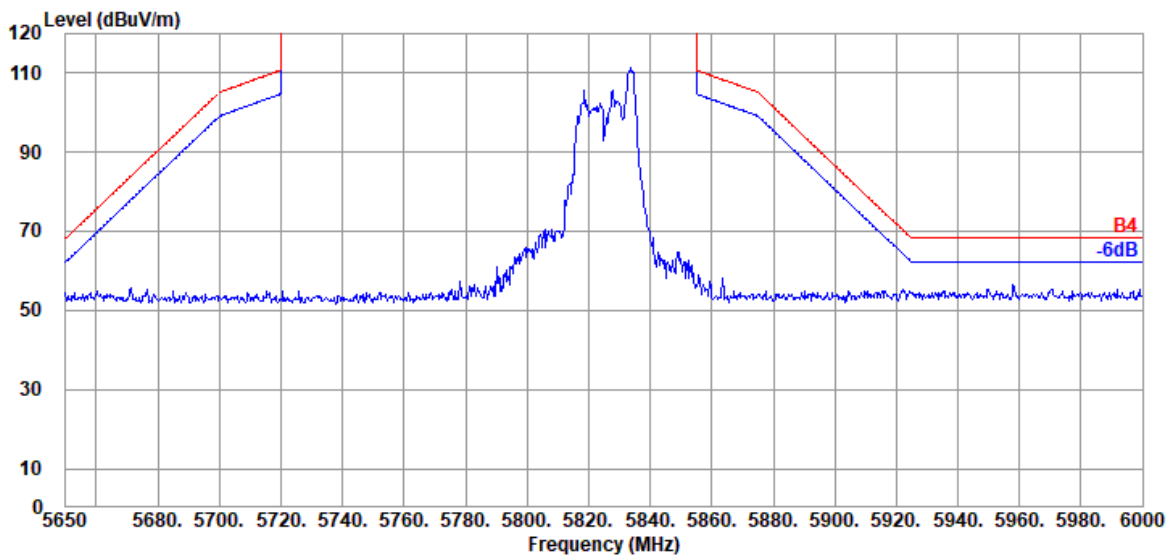


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

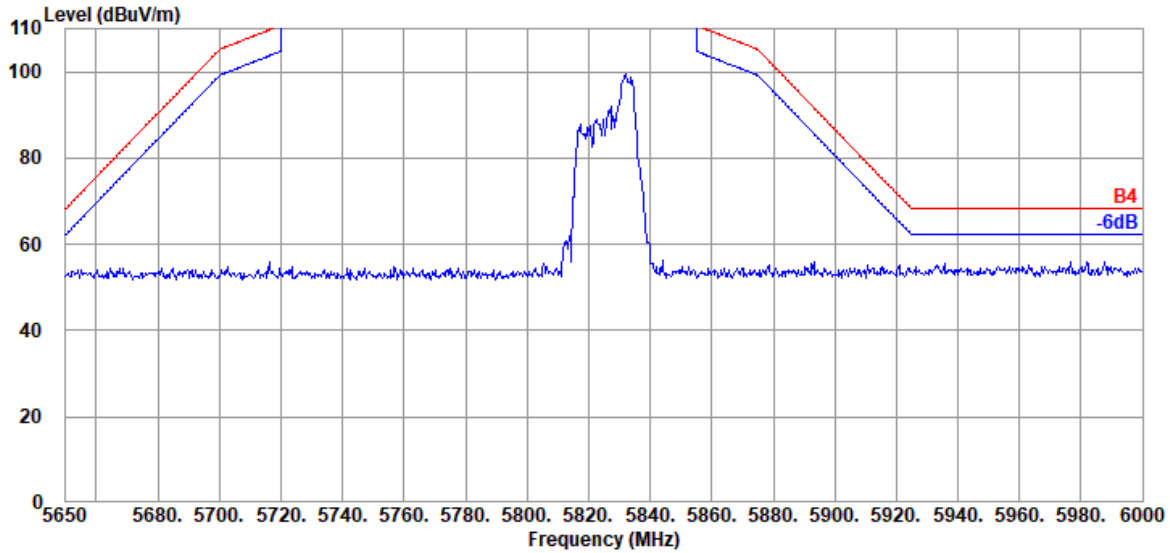


Antenna at Vertical Polarization

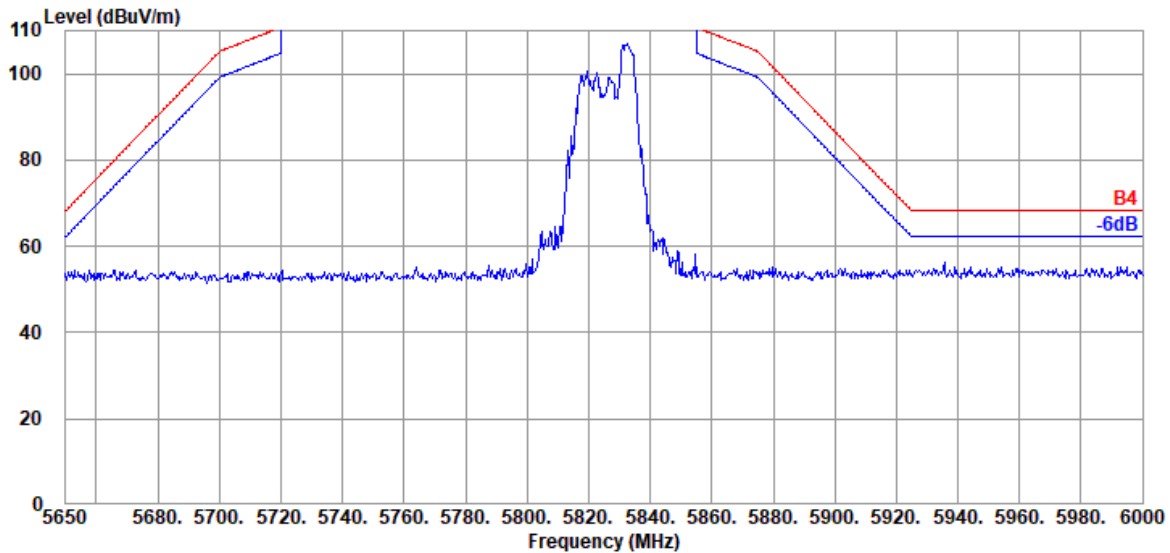


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

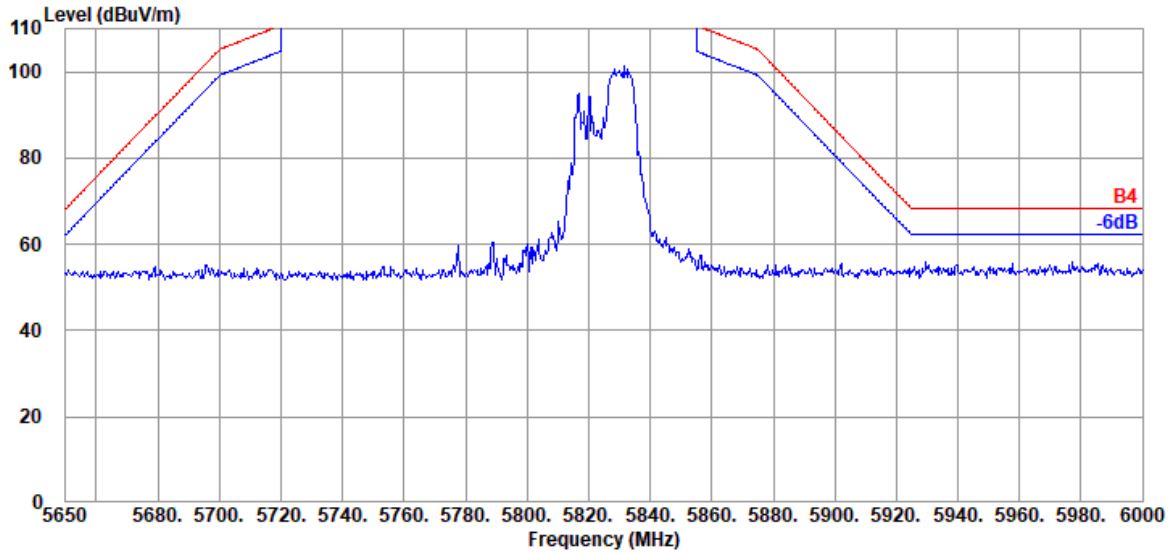

Antenna at Vertical Polarization

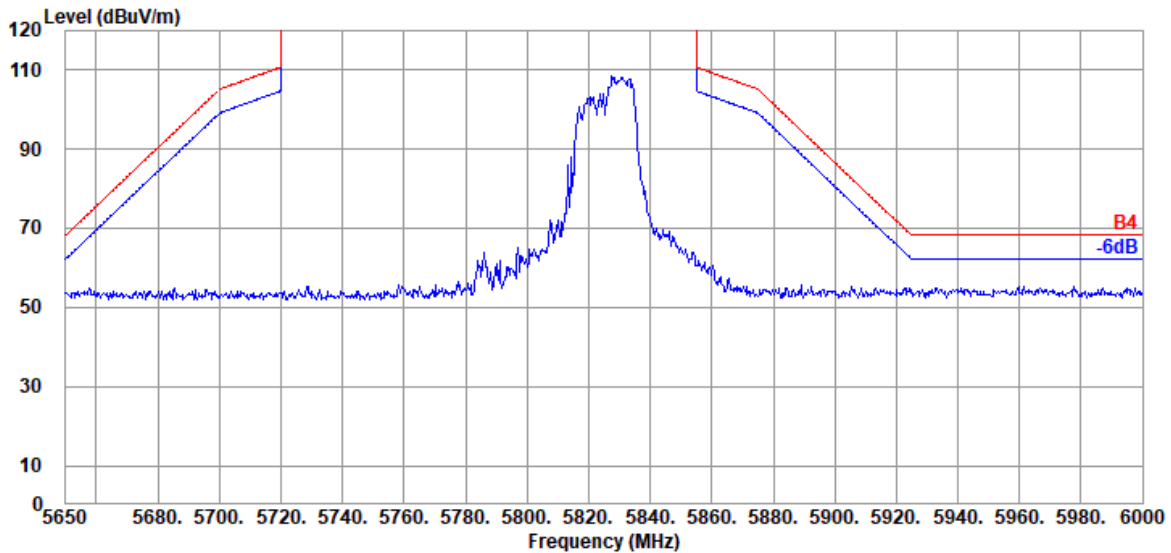


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

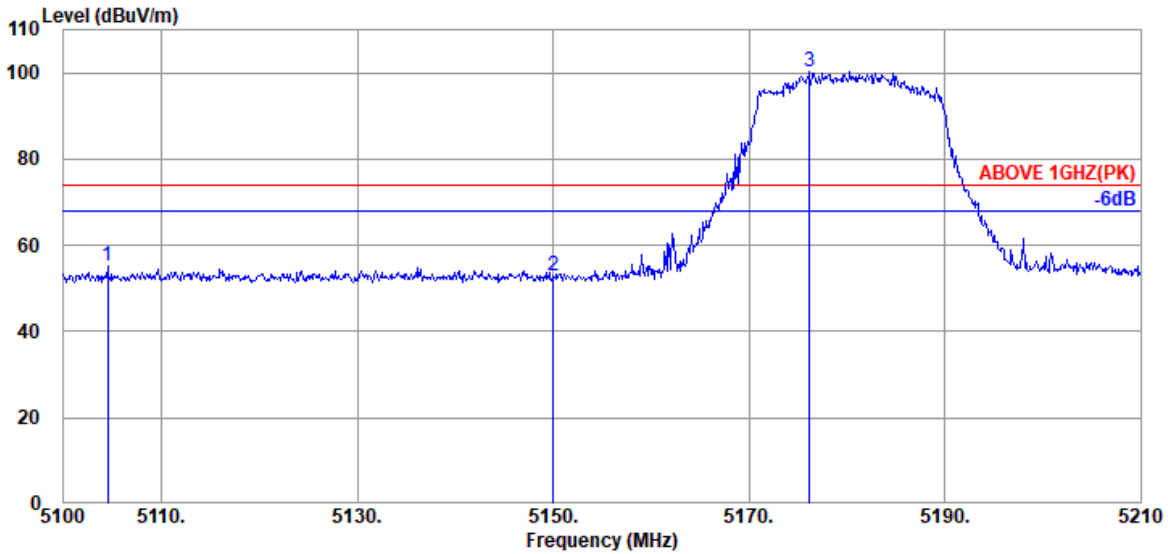

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.510	33.70	8.86	39.29	51.74	55.01	74.00	18.99	Peak
5150.050	33.70	8.88	39.29	49.52	52.81	74.00	21.19	Peak
@ 5176.230	33.70	8.90	39.28	96.82	100.14	---	---	Peak

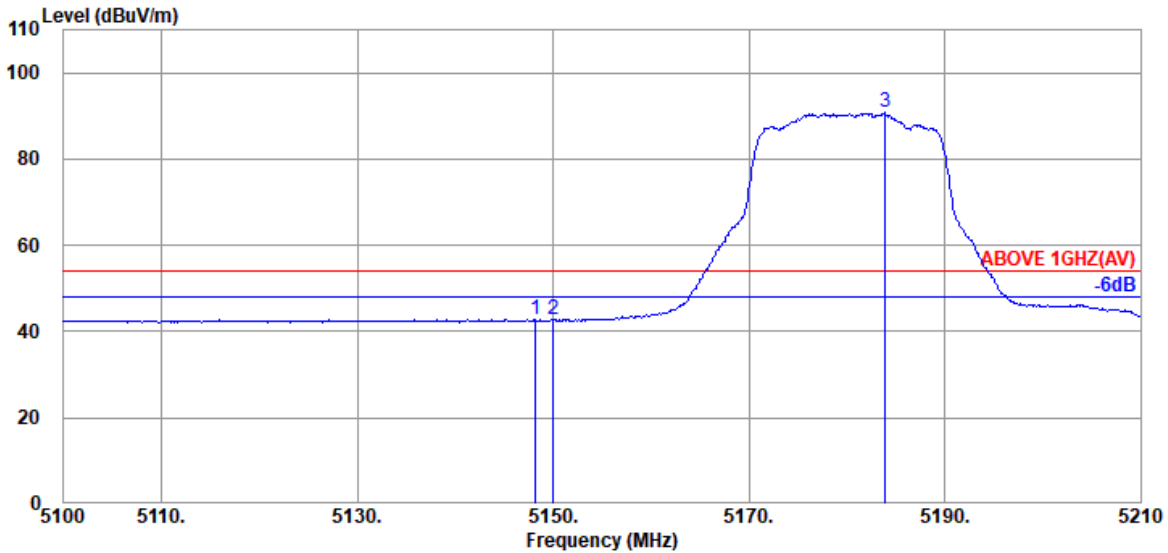


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.180	33.70	8.88	39.29	39.51	42.80	54.00	11.20	Average
5150.050	33.70	8.88	39.29	39.40	42.69	54.00	11.31	Average
@ 5183.930	33.70	8.90	39.28	87.38	90.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

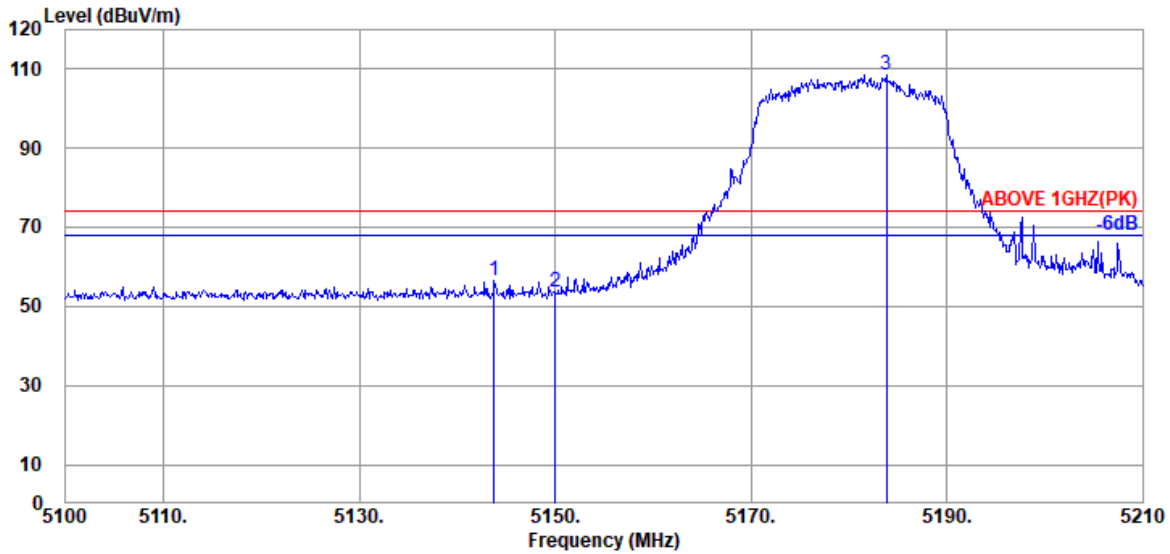

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.780	33.70	8.88	39.29	53.17	56.46	74.00	17.54	Peak
5150.050	33.70	8.88	39.29	50.21	53.50	74.00	20.50	Peak
@ 5183.820	33.70	8.90	39.28	105.11	108.43	---	---	Peak

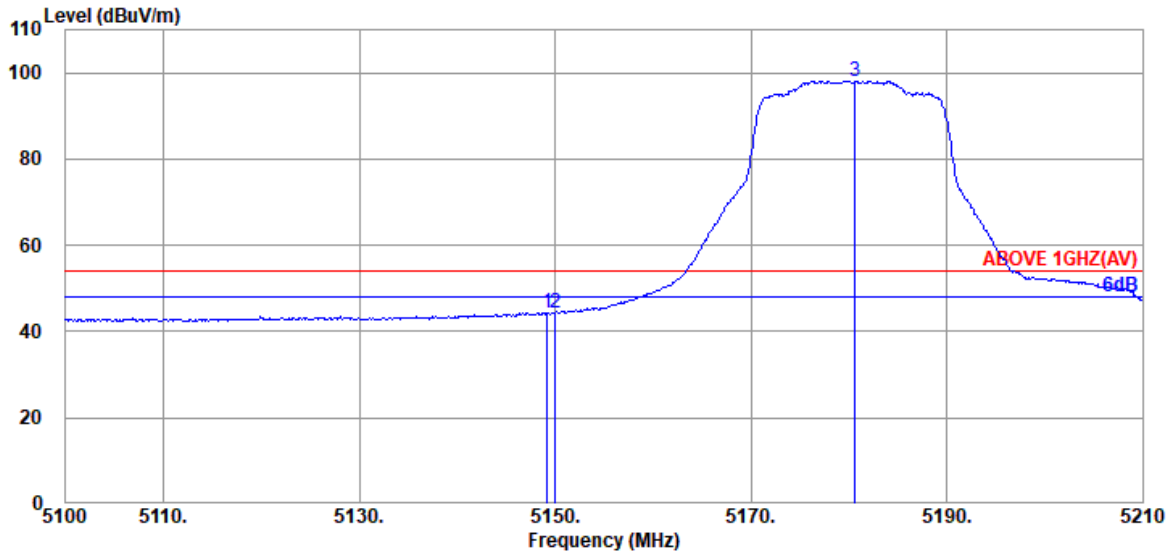

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.70	8.88	39.29	41.01	44.30	54.00	9.70	Average
5150.050	33.70	8.88	39.29	41.20	44.49	54.00	9.51	Average
@ 5180.630	33.70	8.90	39.28	94.71	98.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

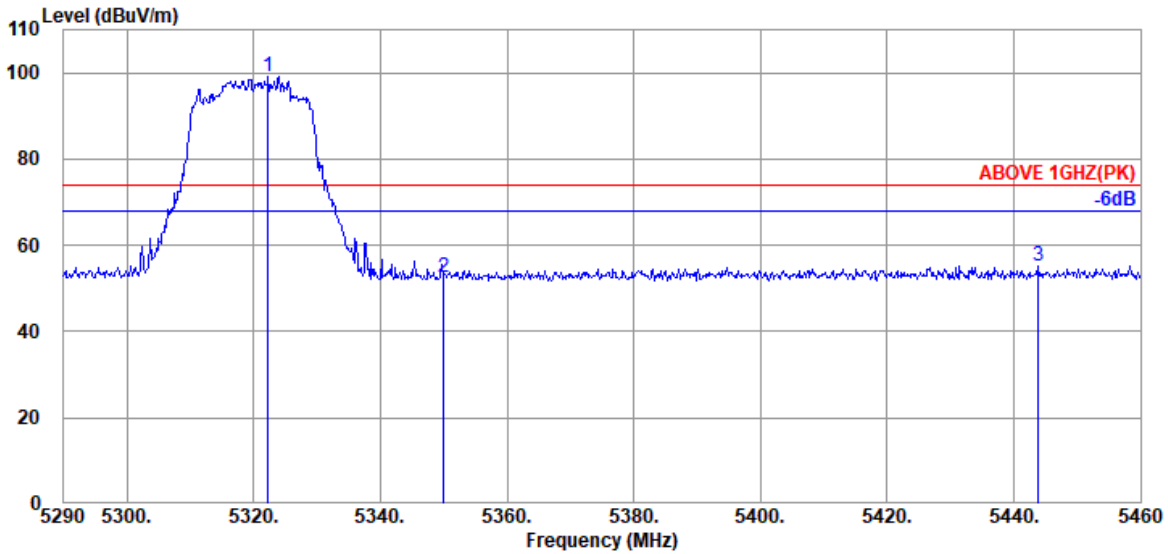

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	34.03	8.98	39.27	95.42	99.16	---	---	Peak
5350.010	33.90	8.99	39.27	48.81	52.43	74.00	21.57	Peak
5443.850	34.17	9.04	39.26	51.37	55.32	74.00	18.68	Peak

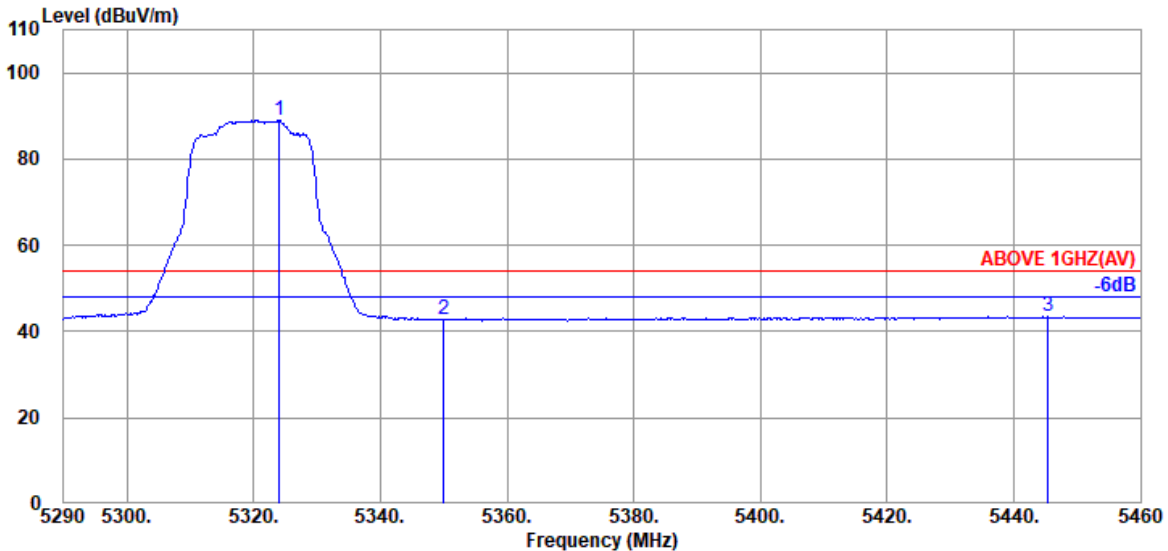


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.97	8.99	39.27	85.27	88.96	---	---	Average
5350.010	33.90	8.99	39.27	39.17	42.79	54.00	11.21	Average
5445.380	34.17	9.04	39.26	39.50	43.45	54.00	10.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

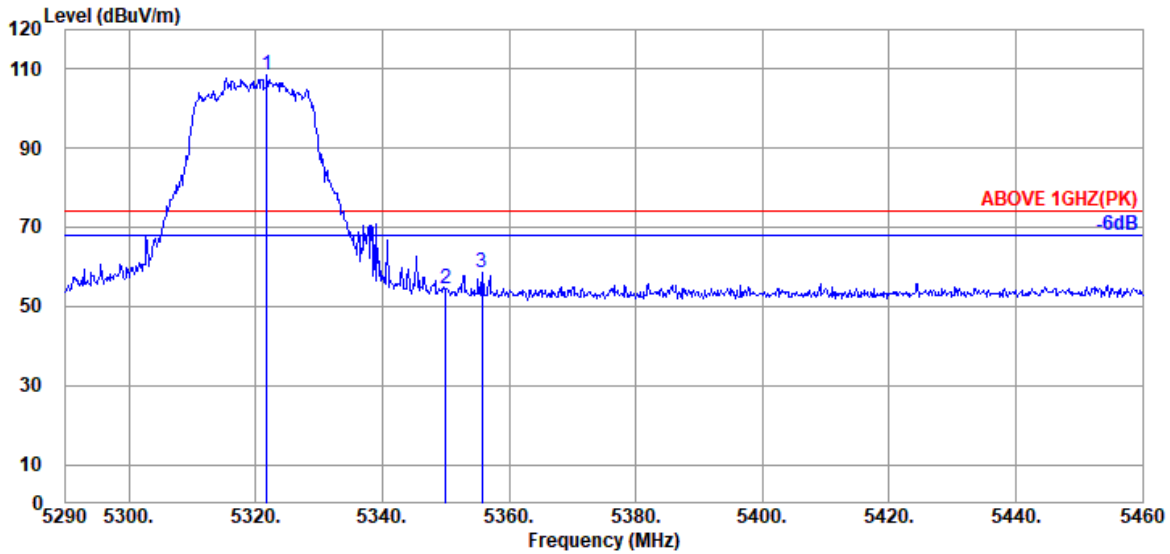

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.790	34.03	8.98	39.27	104.84	108.58	---	---	Peak
5350.010	33.90	8.99	39.27	51.02	54.64	74.00	19.36	Peak
5355.790	33.97	9.00	39.27	54.98	58.68	74.00	15.32	Peak

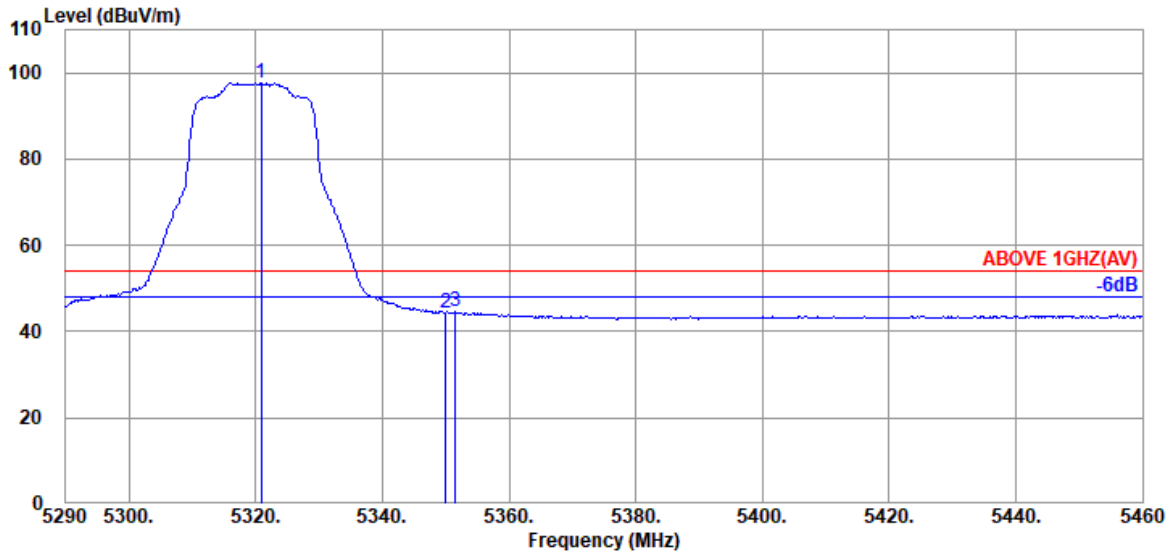


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.940	34.03	8.98	39.27	93.92	97.66	---	---	Average
5350.010	33.90	8.99	39.27	40.81	44.43	54.00	9.57	Average
5351.540	33.90	8.99	39.27	40.89	44.51	54.00	9.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

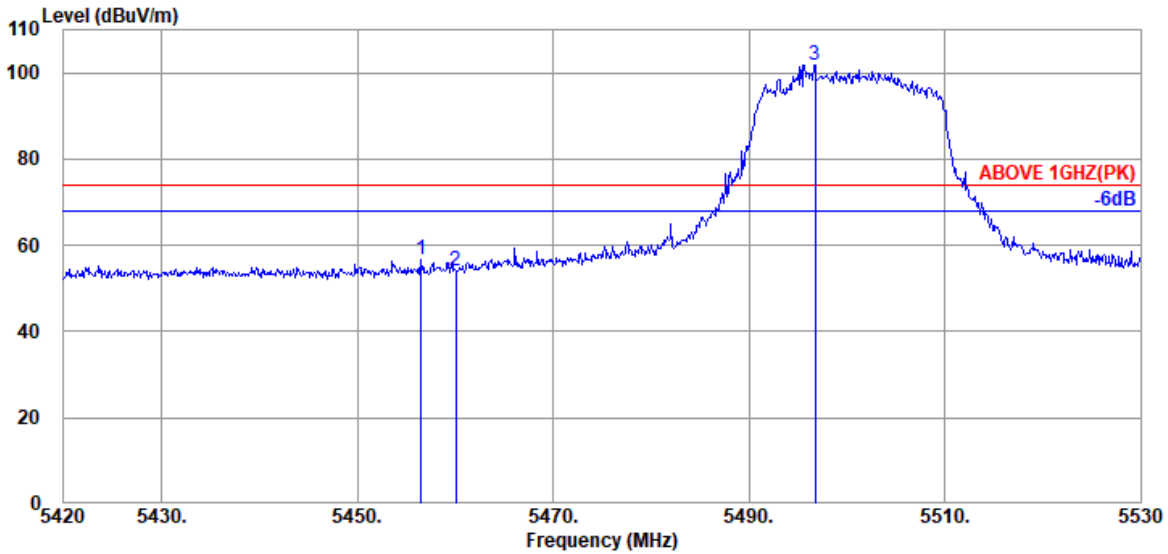

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.520	34.20	9.05	39.26	52.68	56.67	74.00	17.33	Peak
5460.040	34.20	9.05	39.26	50.18	54.17	74.00	19.83	Peak
@ 5496.780	34.10	9.08	39.26	97.80	101.72	---	---	Peak

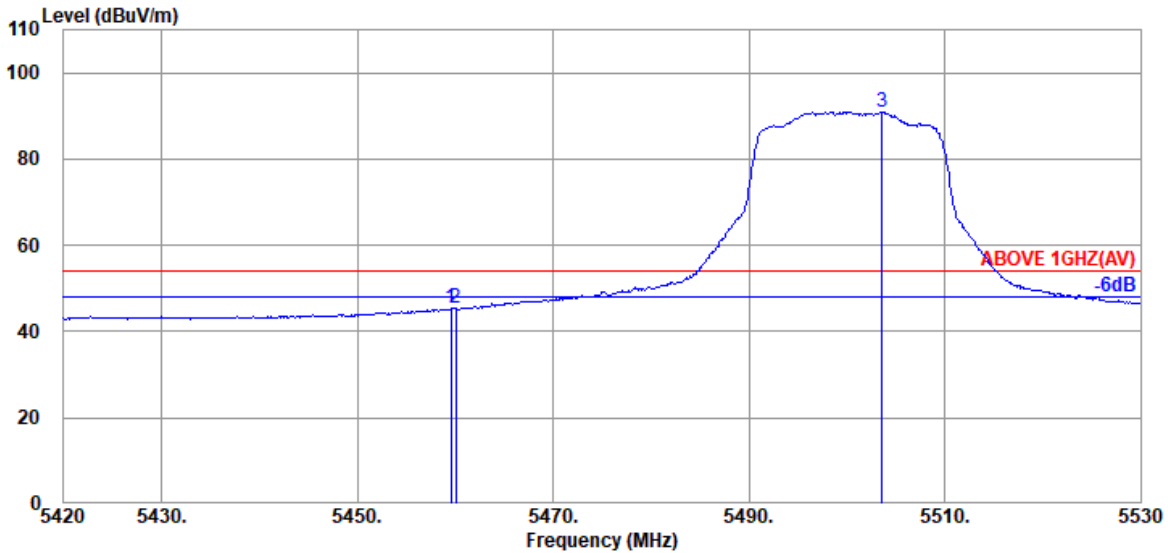


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	41.40	45.39	54.00	8.61	Average
5460.040	34.20	9.05	39.26	41.32	45.31	54.00	8.69	Average
@ 5503.600	34.10	9.08	39.26	87.11	91.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

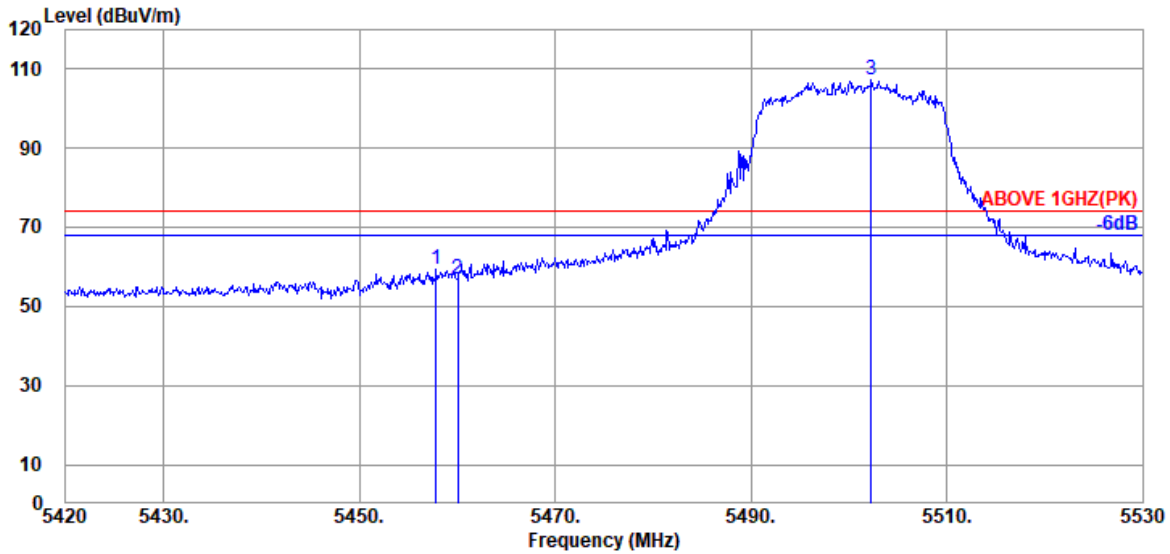

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.840	34.20	9.05	39.26	55.47	59.46	74.00	14.54	Peak
5460.040	34.20	9.05	39.26	53.08	57.07	74.00	16.93	Peak
@ 5502.280	34.10	9.08	39.26	103.24	107.16	---	---	Peak

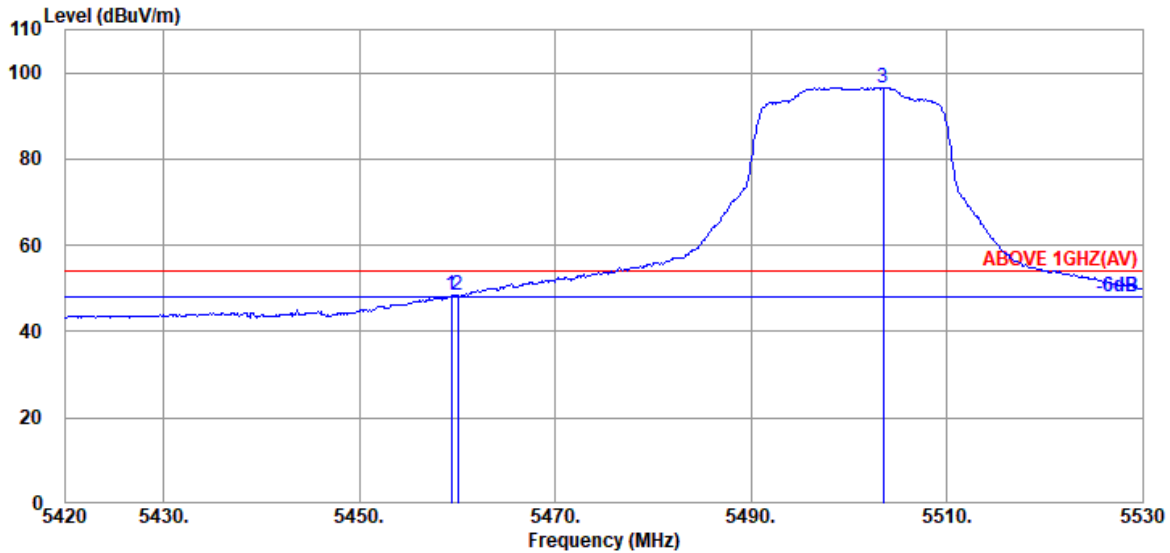


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.380	34.20	9.05	39.26	44.49	48.48	54.00	5.52	Average
5460.040	34.20	9.05	39.26	44.57	48.56	54.00	5.44	Average
@ 5503.490	34.10	9.08	39.26	92.71	96.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

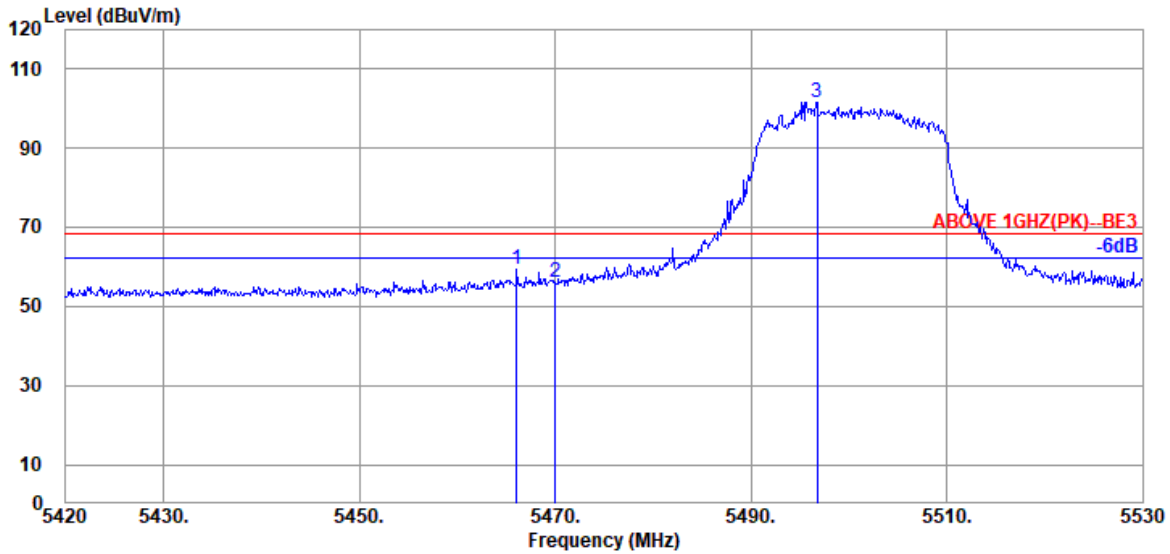

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.090	34.17	9.06	39.26	55.51	59.48	68.20	8.72	Peak
5470.050	34.17	9.06	39.26	52.29	56.26	68.20	11.94	Peak
@ 5496.780	34.10	9.08	39.26	97.80	101.72	---	---	Peak

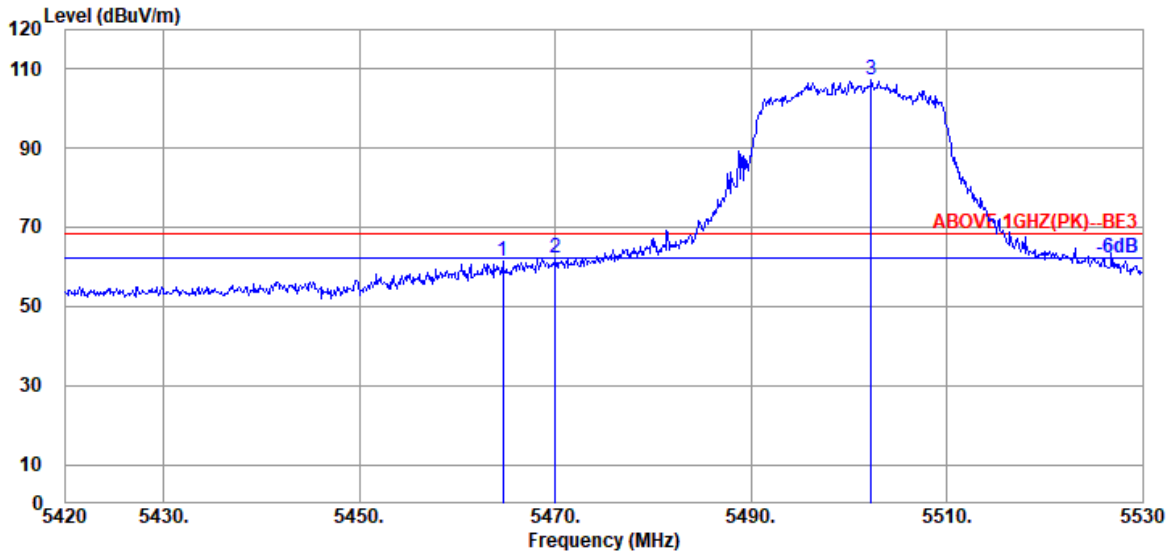

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.660	34.17	9.06	39.26	57.66	61.63	68.20	6.57	Peak
5470.050	34.17	9.06	39.26	58.13	62.10	68.20	6.10	Peak
@ 5502.280	34.10	9.08	39.26	103.24	107.16	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

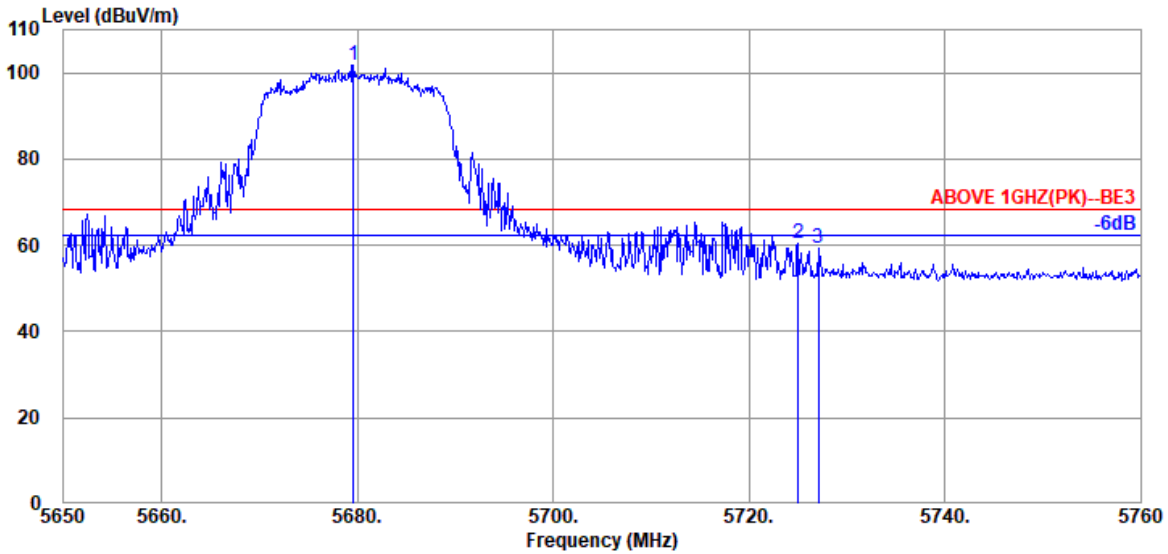

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.590	33.87	9.17	39.30	98.05	101.79	---	---	Peak
5725.020	33.80	9.20	39.30	56.70	60.40	68.20	7.80	Peak
5727.110	33.80	9.20	39.31	55.52	59.21	68.20	8.99	Peak

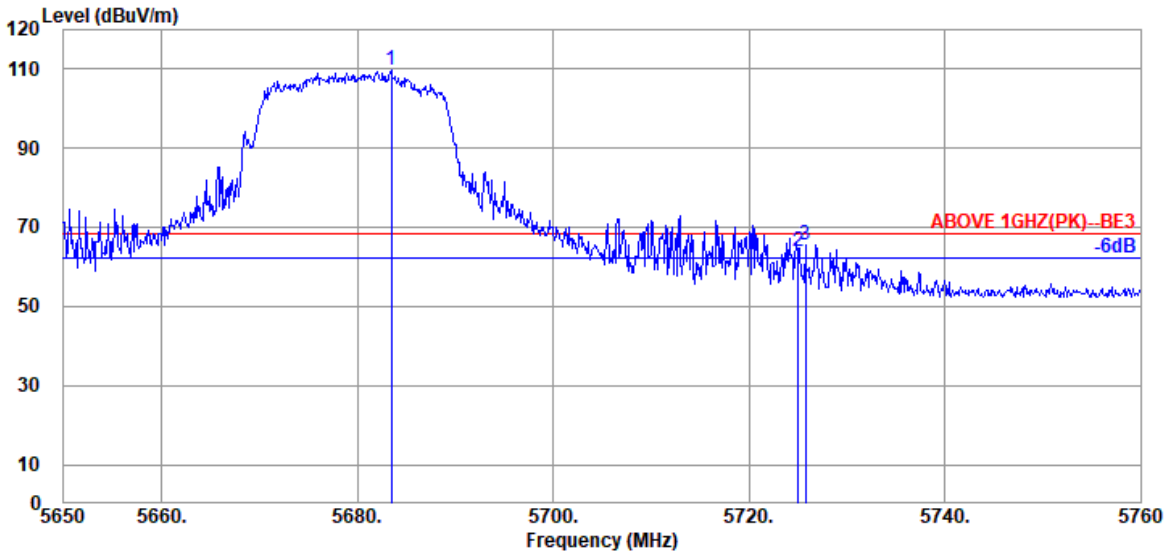


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.440	33.87	9.17	39.30	106.00	109.74	---	---	Peak
5725.020	33.80	9.20	39.30	60.30	64.00	68.20	4.20	Peak
5725.790	33.80	9.20	39.30	61.98	65.68	68.20	2.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

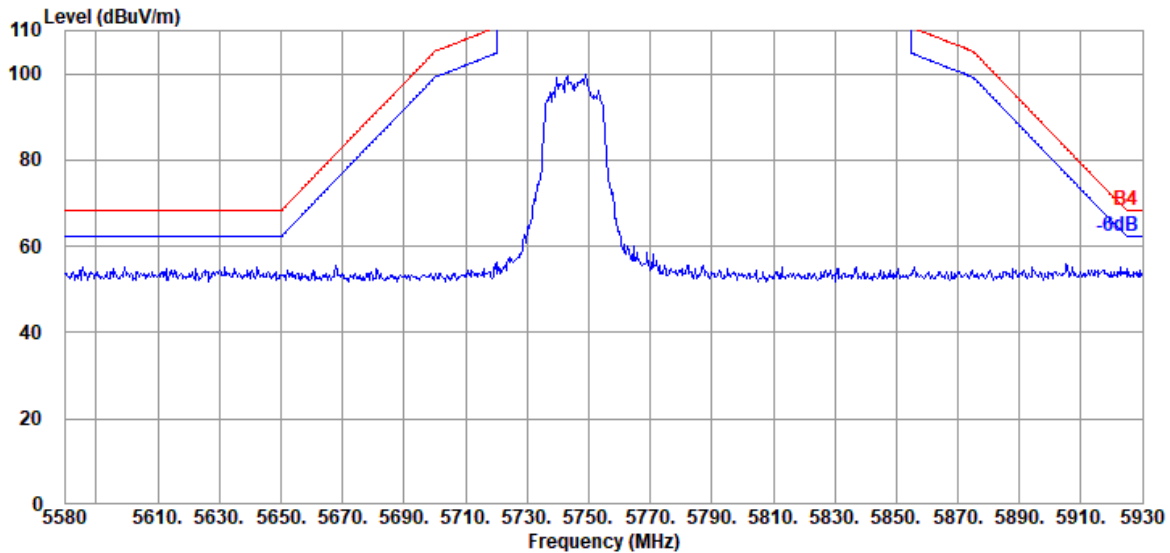


Antenna at Vertical Polarization

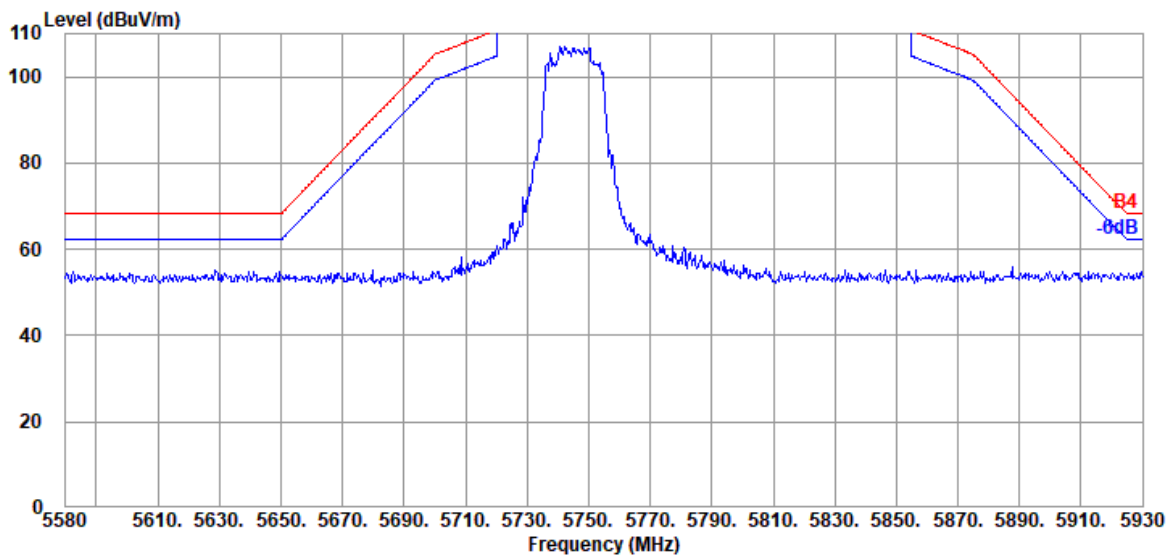


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

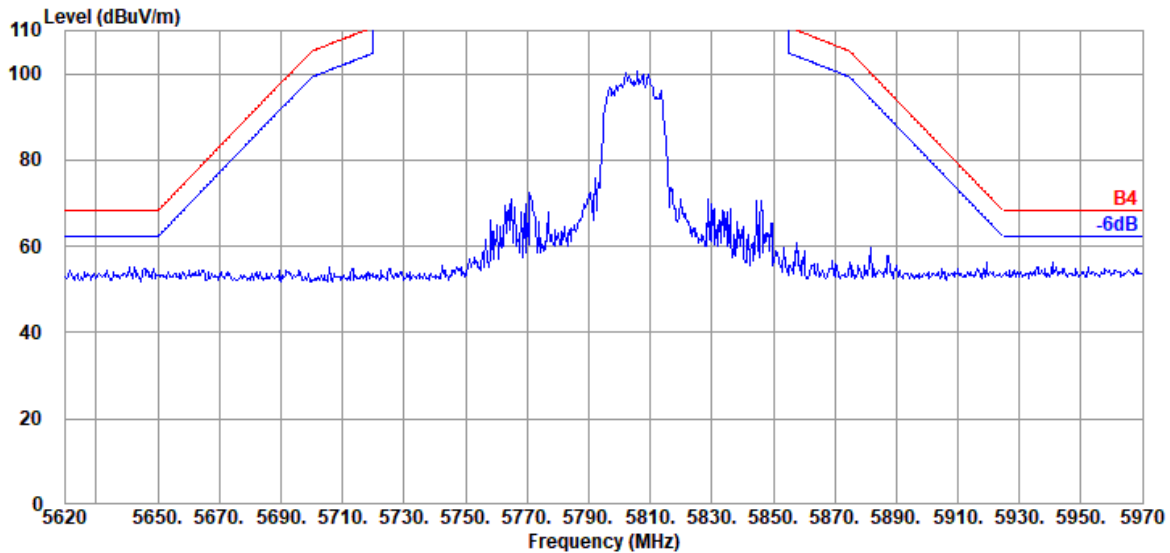

Antenna at Vertical Polarization

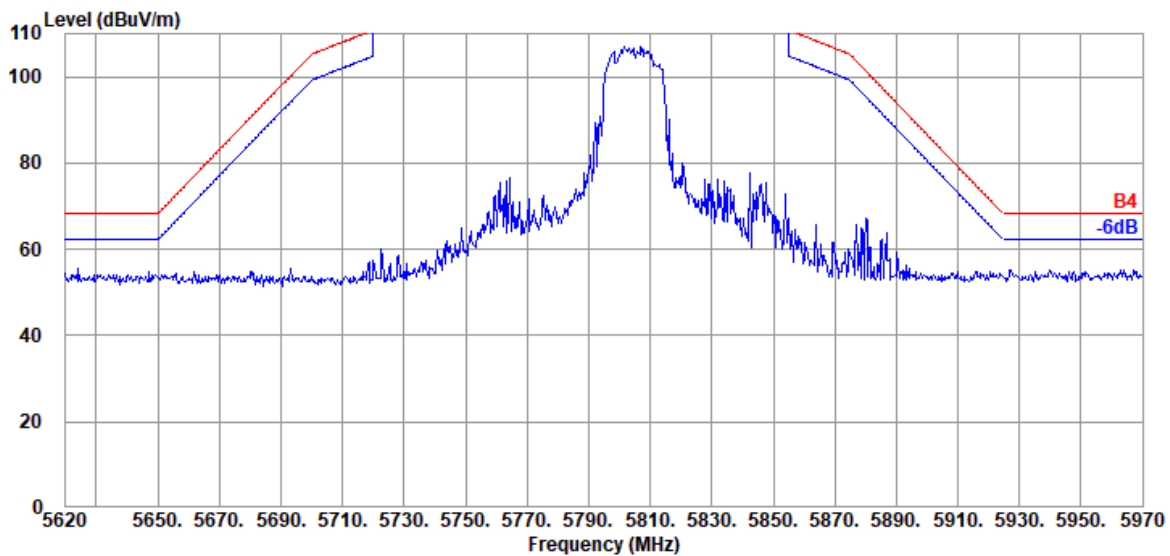


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

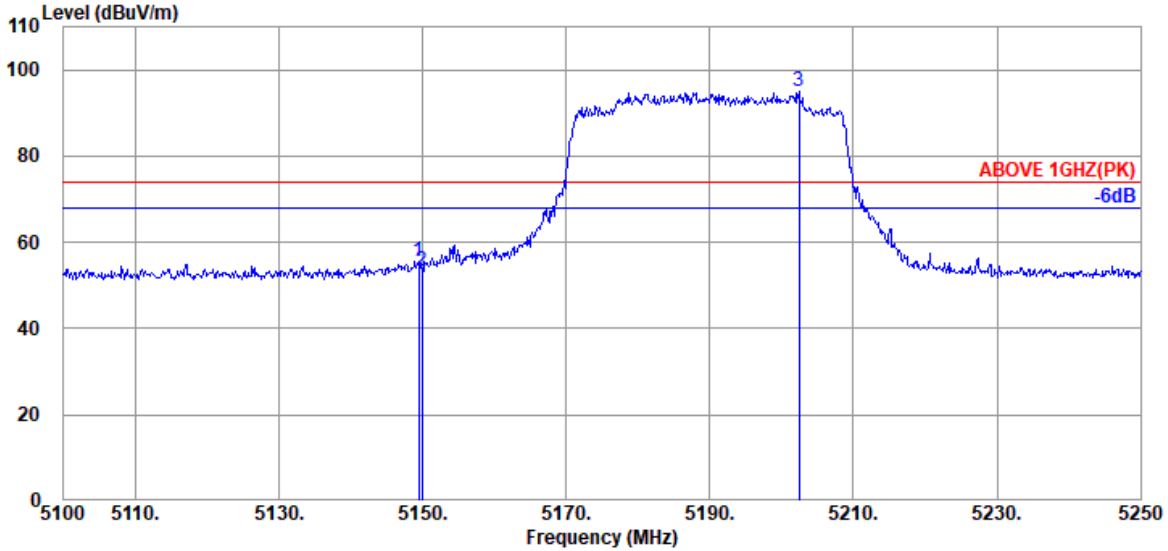

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	52.34	55.63	74.00	18.37	Peak
5149.950	33.70	8.88	39.29	49.97	53.26	74.00	20.74	Peak
@ 5202.450	33.72	8.92	39.28	91.74	95.10	---	---	Peak

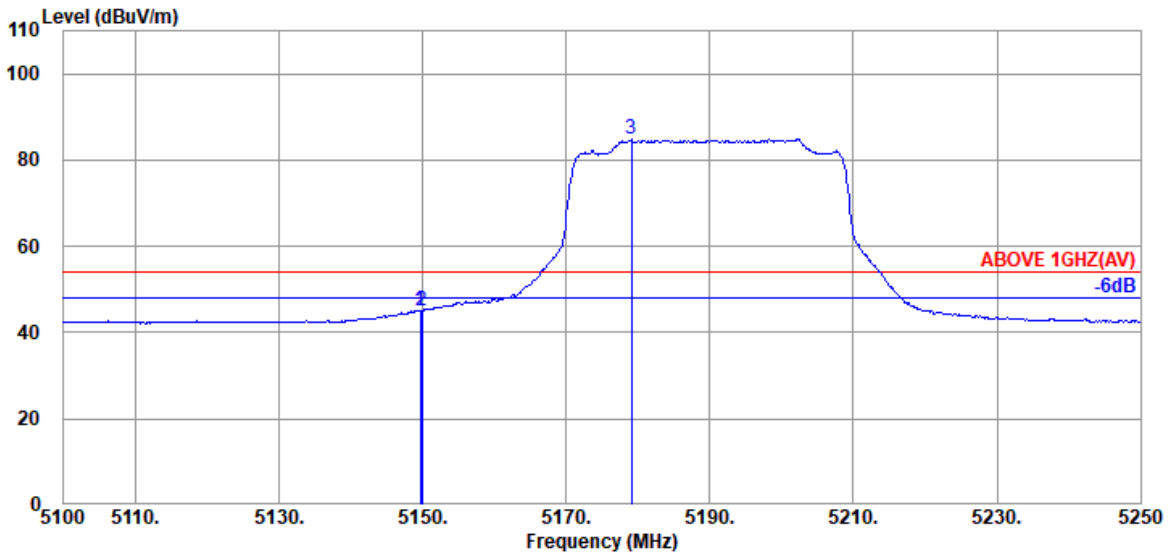


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	41.91	45.20	54.00	8.80	Average
5149.950	33.70	8.88	39.29	41.62	44.91	54.00	9.09	Average
@ 5179.050	33.70	8.90	39.28	81.49	84.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

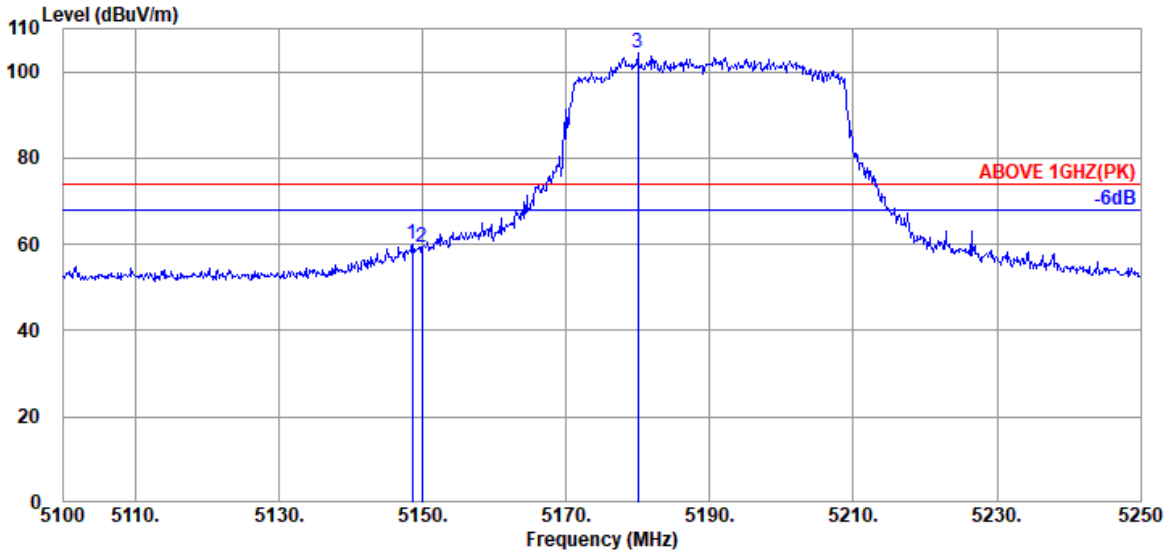

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.70	8.88	39.29	56.89	60.18	74.00	13.82	Peak
5149.950	33.70	8.88	39.29	56.21	59.50	74.00	14.50	Peak
@ 5179.950	33.70	8.90	39.28	101.15	104.47	---	---	Peak

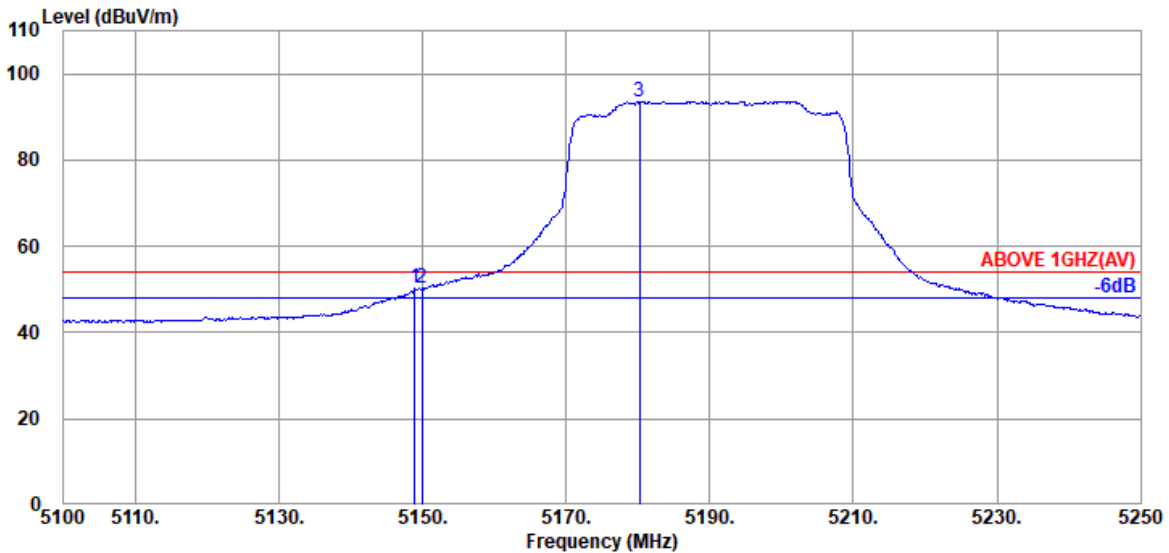


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.88	39.29	47.00	50.29	54.00	3.71	Average
5149.950	33.70	8.88	39.29	46.87	50.16	54.00	3.84	Average
@ 5180.250	33.70	8.90	39.28	90.33	93.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

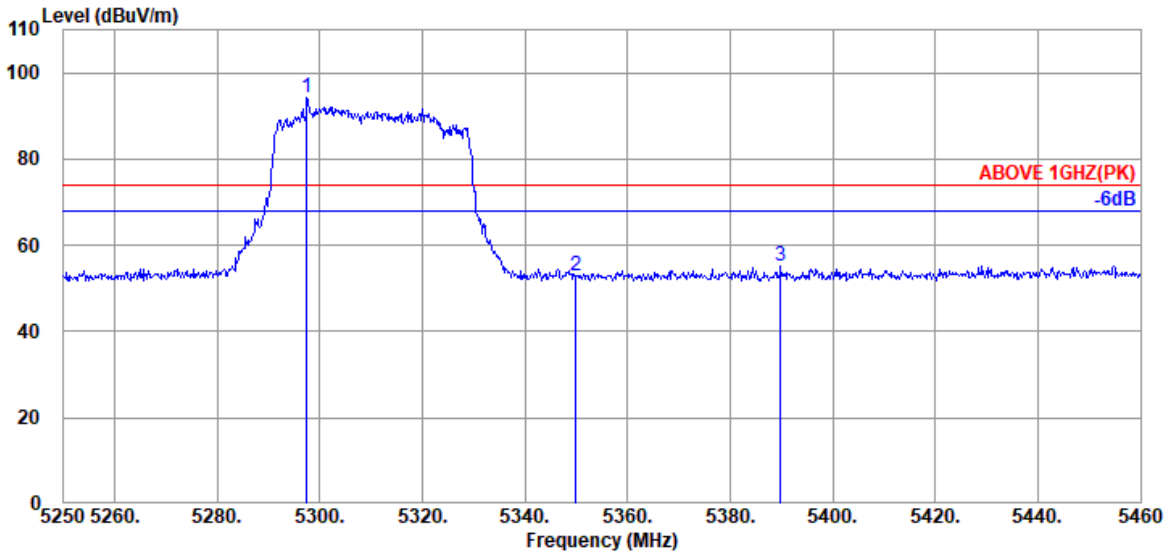

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.460	34.10	8.97	39.28	90.31	94.10	---	---	Peak
5349.960	33.90	8.99	39.27	49.28	52.90	74.00	21.10	Peak
5389.860	34.10	9.02	39.27	51.38	55.23	74.00	18.77	Peak

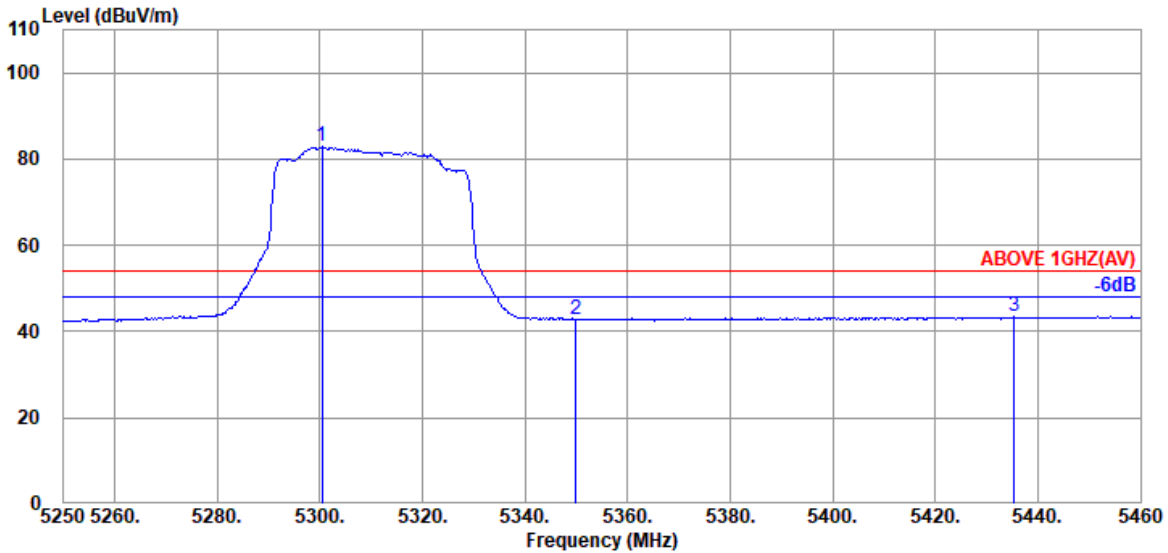


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.10	8.97	39.28	79.07	82.86	---	---	Average
5349.960	33.90	8.99	39.27	39.31	42.93	54.00	11.07	Average
5435.430	34.17	9.04	39.26	39.51	43.46	54.00	10.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

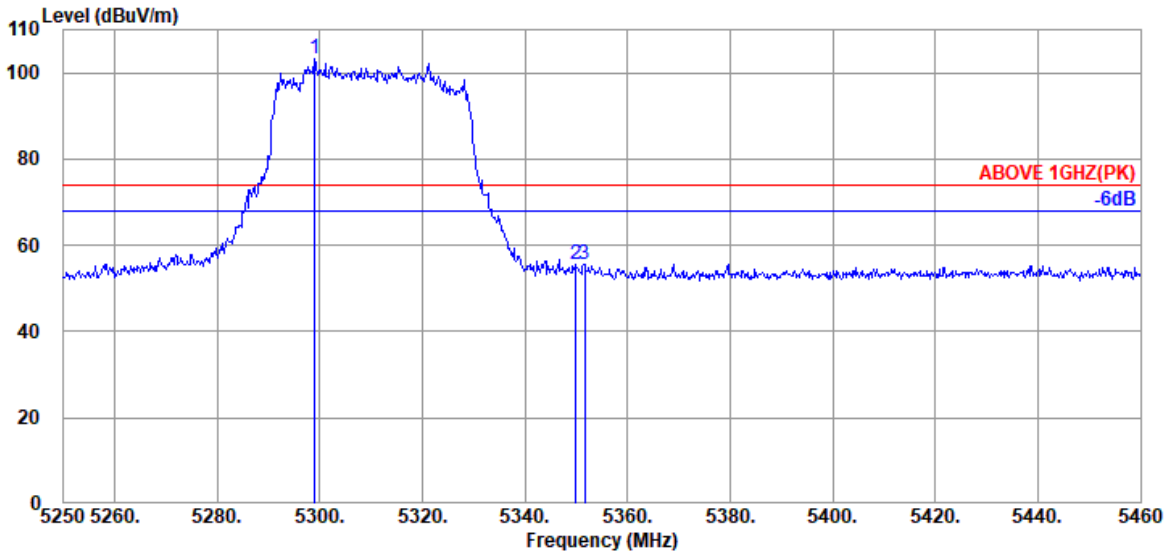

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.930	34.10	8.97	39.28	99.36	103.15	---	---	Peak
5349.960	33.90	8.99	39.27	51.88	55.50	74.00	18.50	Peak
5351.640	33.90	8.99	39.27	51.89	55.51	74.00	18.49	Peak

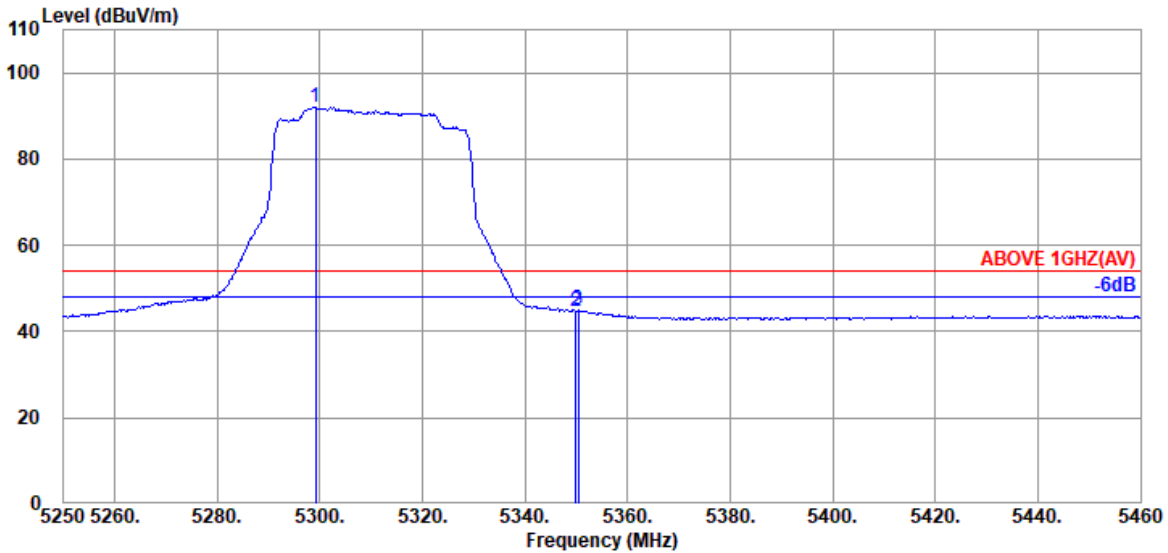


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.140	34.10	8.97	39.28	88.31	92.10	---	---	Average
5349.960	33.90	8.99	39.27	41.21	44.83	54.00	9.17	Average
5350.380	33.90	8.99	39.27	41.30	44.92	54.00	9.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

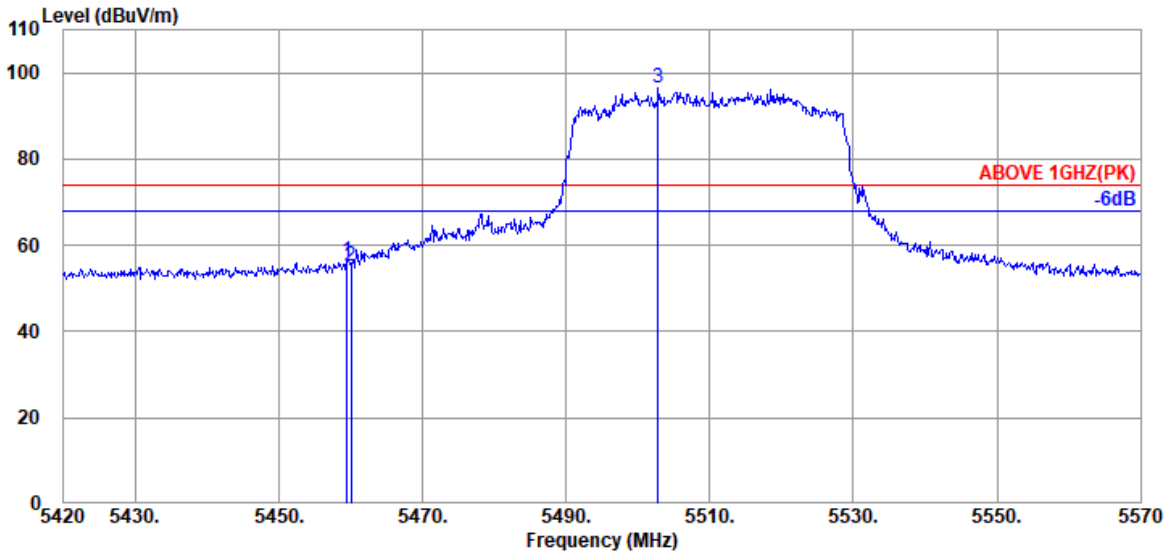

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.450	34.20	9.05	39.26	52.42	56.41	74.00	17.59	Peak
5460.050	34.20	9.05	39.26	51.18	55.17	74.00	18.83	Peak
@ 5502.800	34.10	9.08	39.26	92.67	96.59	---	---	Peak

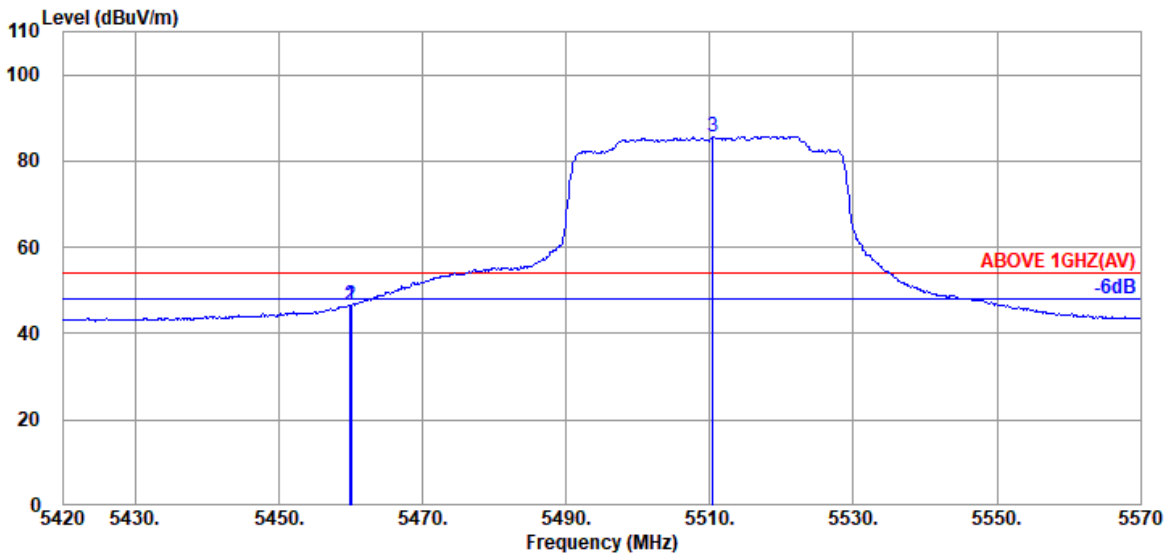


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.20	9.05	39.26	42.66	46.65	54.00	7.35	Average
5460.050	34.20	9.05	39.26	42.62	46.61	54.00	7.39	Average
@ 5510.450	34.10	9.08	39.26	81.86	85.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

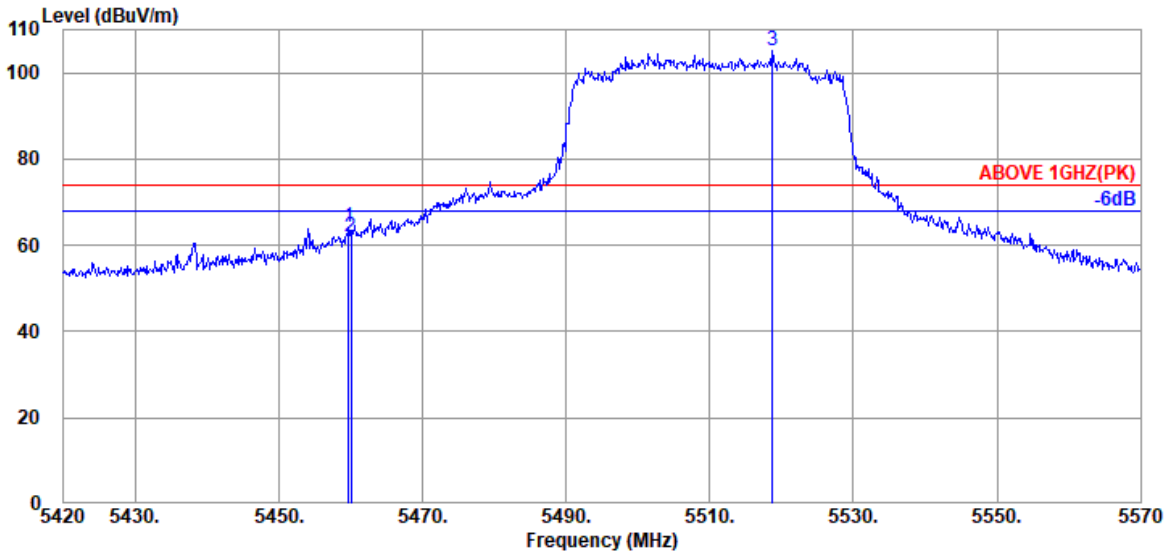

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.20	9.05	39.26	60.08	64.07	74.00	9.93	Peak
5460.050	34.20	9.05	39.26	57.96	61.95	74.00	12.05	Peak
@ 5518.700	34.10	9.09	39.26	101.00	104.93	---	---	Peak

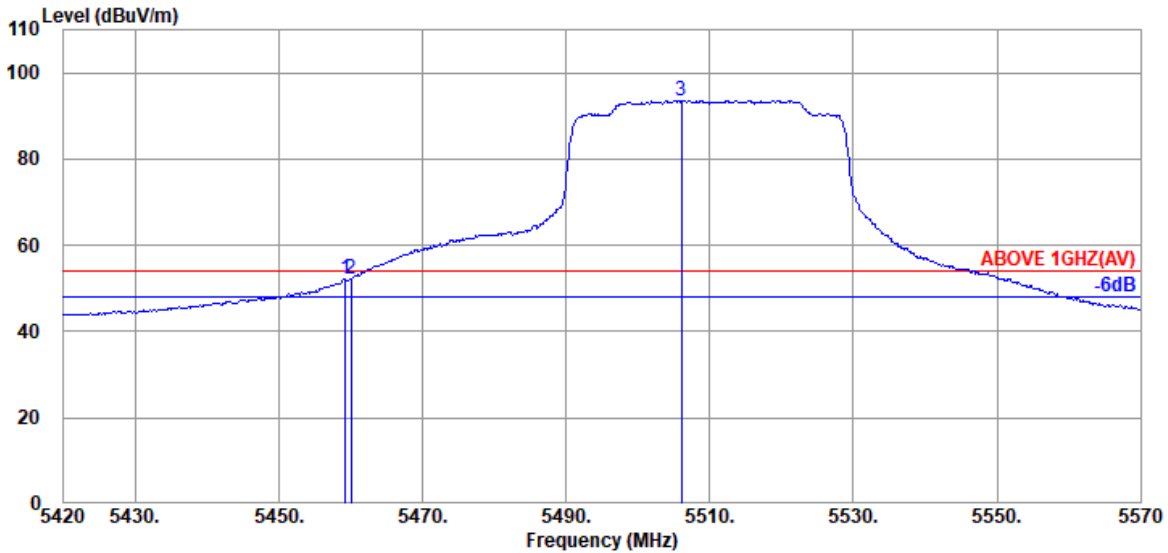


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.20	9.05	39.26	48.15	52.14	54.00	1.86	Average
5460.050	34.20	9.05	39.26	48.14	52.13	54.00	1.87	Average
@ 5506.100	34.10	9.08	39.26	89.68	93.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

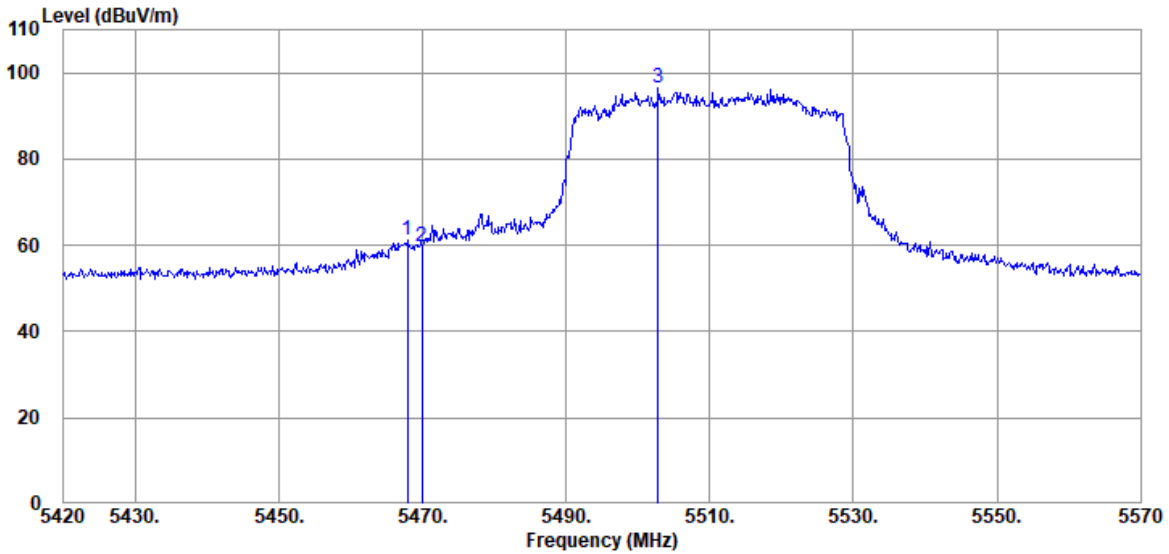

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.17	9.06	39.26	57.30	61.27	68.20	6.93	Peak
5469.950	34.17	9.06	39.26	55.65	59.62	68.20	8.58	Peak
@ 5502.800	34.10	9.08	39.26	92.67	96.59	---	---	Peak

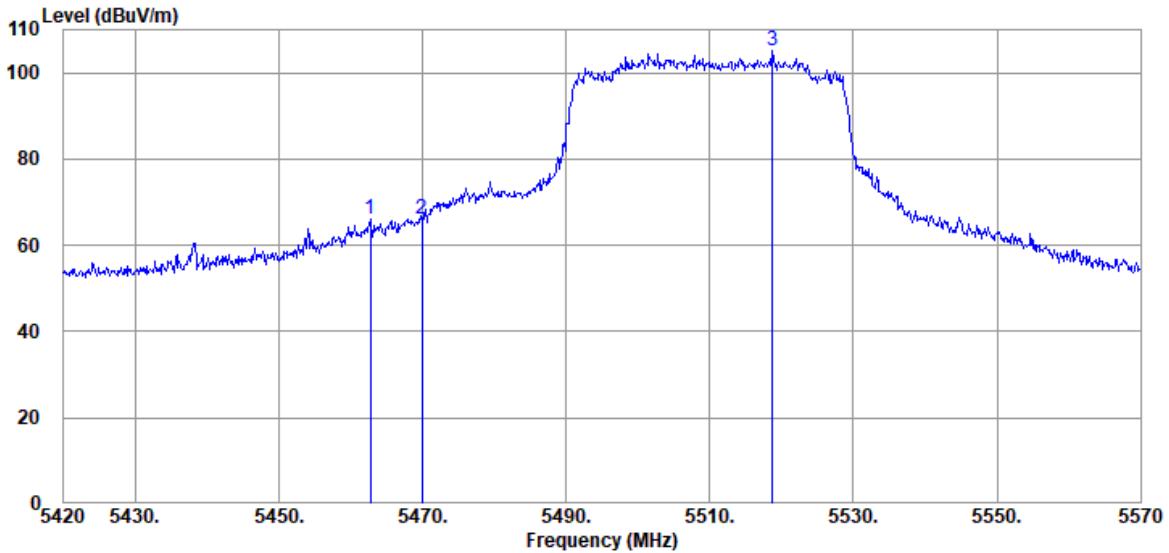

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.750	34.20	9.05	39.26	62.15	66.14	68.20	2.06	Peak
5469.950	34.17	9.06	39.26	61.99	65.96	68.20	2.24	Peak
@ 5518.700	34.10	9.09	39.26	101.00	104.93	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

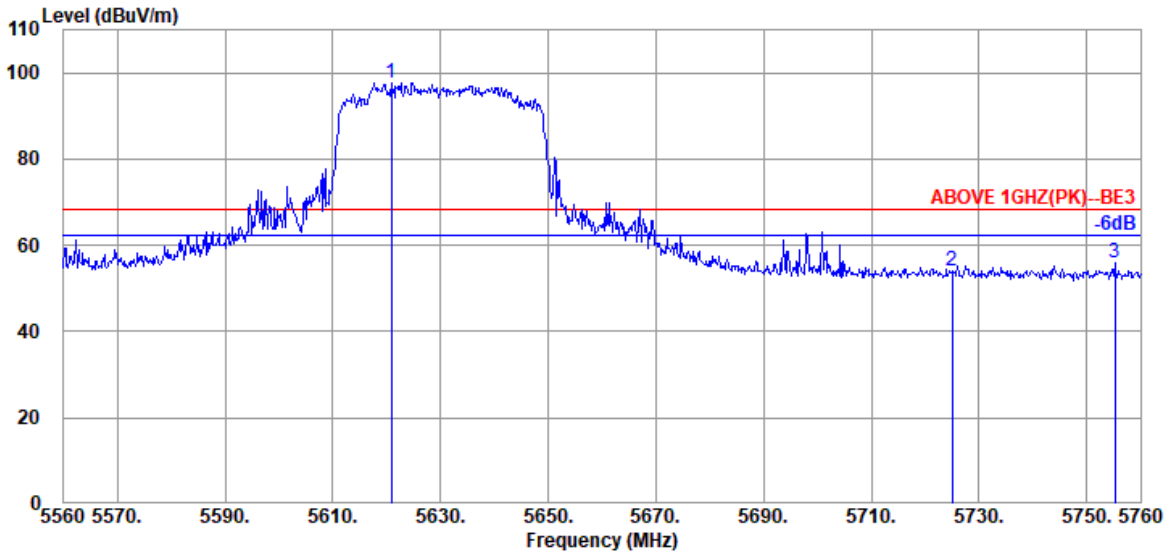

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.800	34.00	9.14	39.29	93.86	97.71	---	---	Peak
5725.000	33.80	9.20	39.30	50.22	53.92	68.20	14.28	Peak
5755.200	33.80	9.20	39.31	52.16	55.85	68.20	12.35	Peak

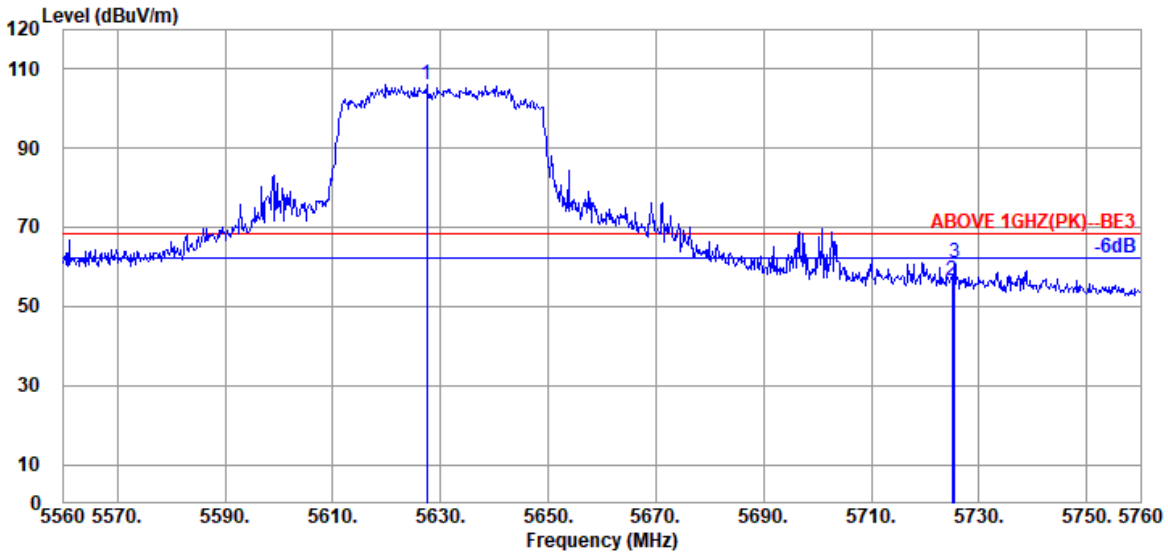


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5627.400	34.00	9.14	39.29	102.26	106.11	---	---	Peak
5725.000	33.80	9.20	39.30	52.68	56.38	68.20	11.82	Peak
5725.400	33.80	9.20	39.30	57.14	60.84	68.20	7.36	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

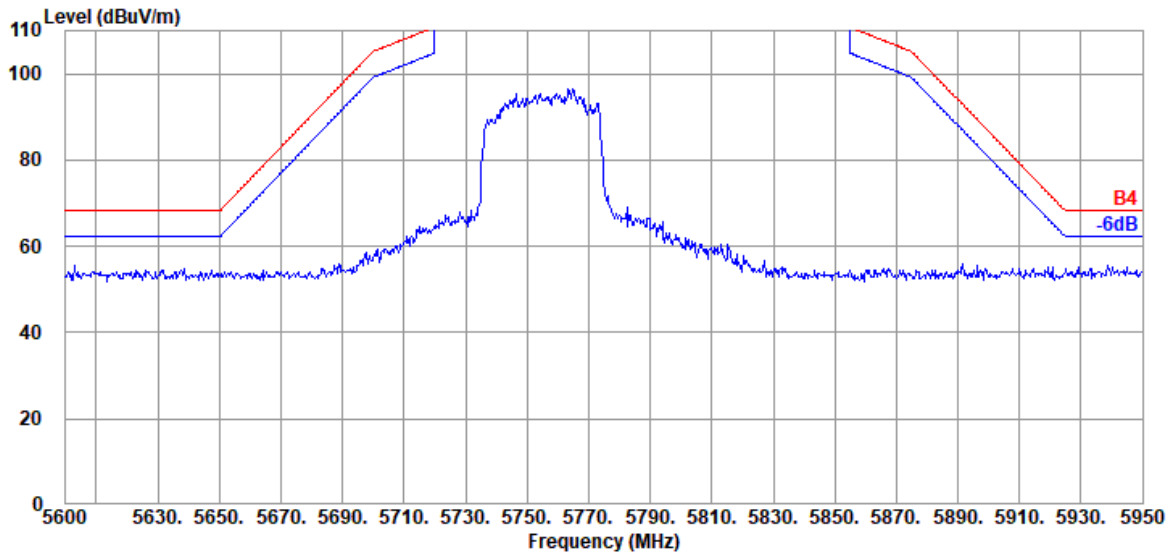


Antenna at Vertical Polarization

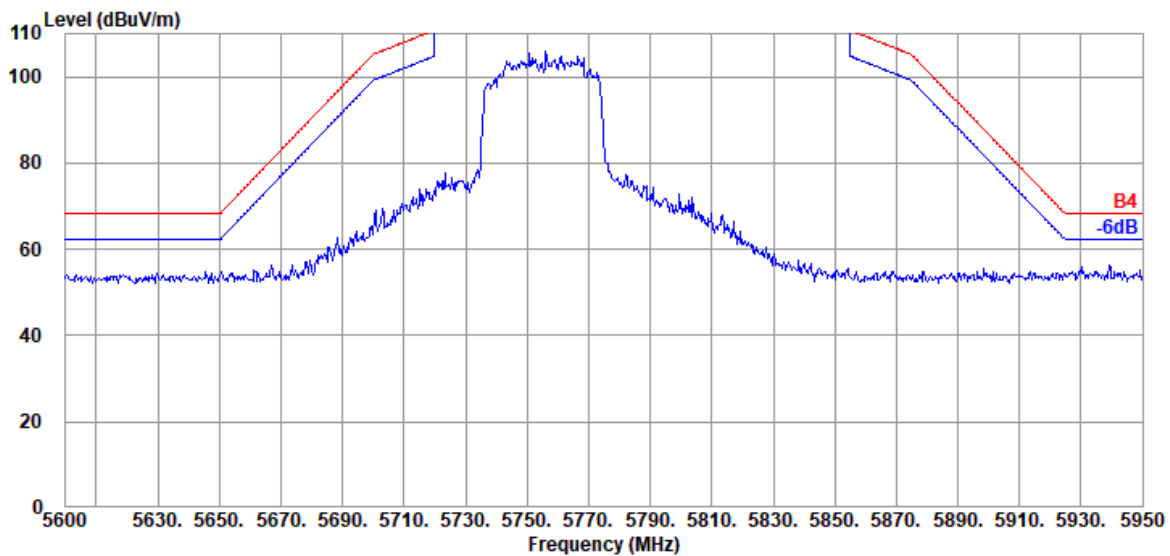


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

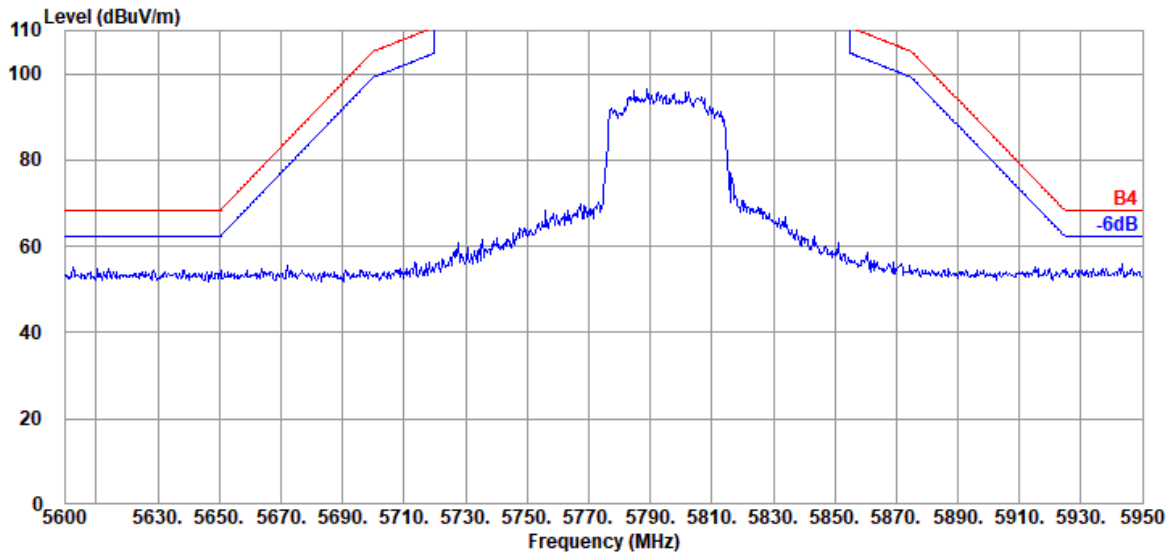

Antenna at Vertical Polarization

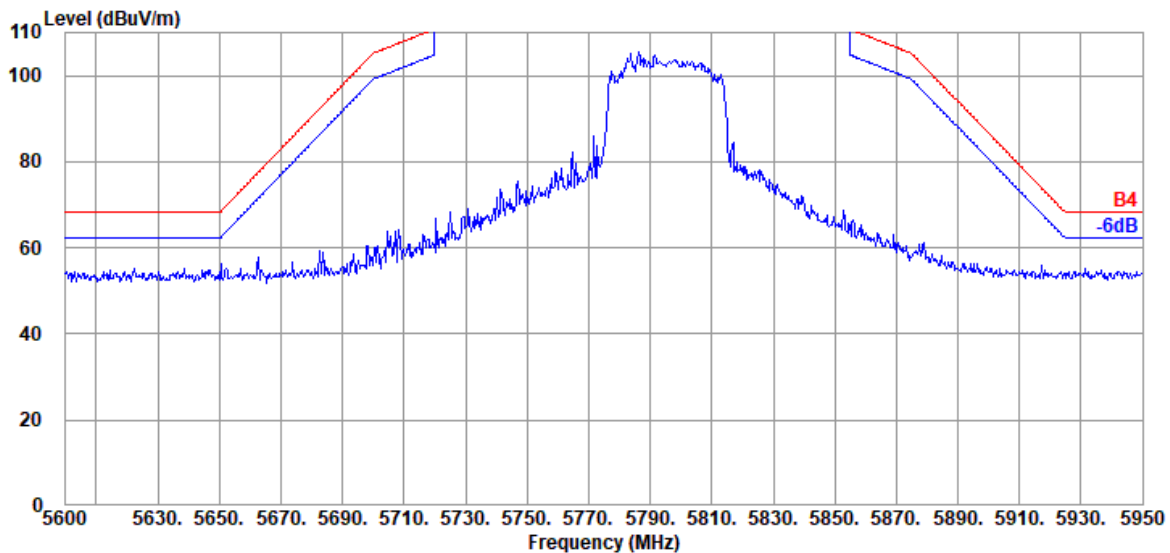


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

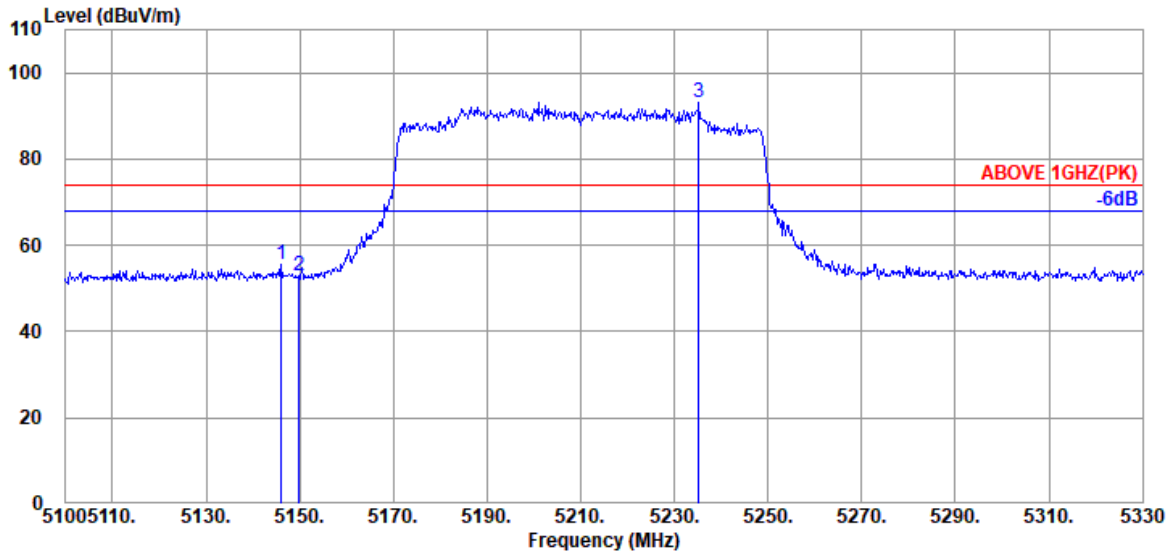

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.70	8.88	39.29	52.34	55.63	74.00	18.37	Peak
5149.910	33.70	8.88	39.29	49.60	52.89	74.00	21.11	Peak
@ 5235.240	33.78	8.93	39.28	89.71	93.14	---	---	Peak

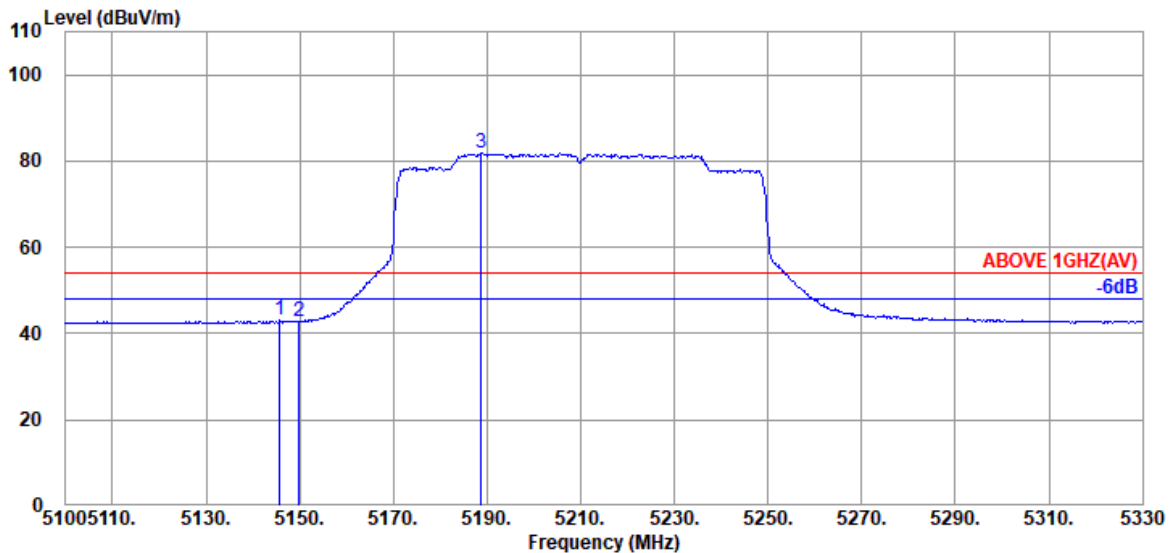


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.770	33.70	8.88	39.29	39.76	43.05	54.00	10.95	Average
5149.910	33.70	8.88	39.29	39.46	42.75	54.00	11.25	Average
@ 5188.780	33.70	8.91	39.28	78.50	81.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

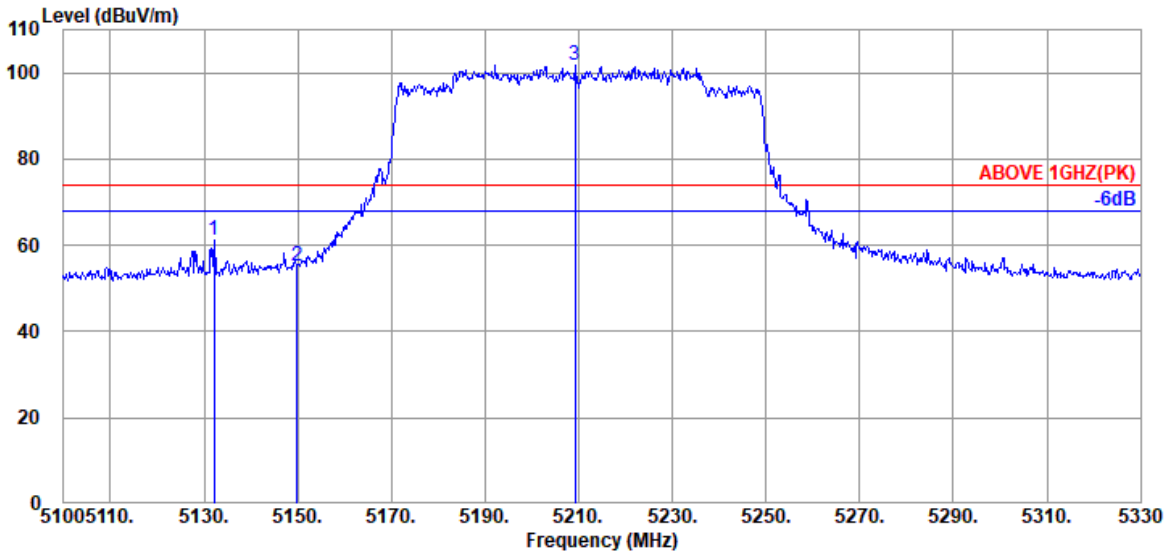

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.200	33.70	8.88	39.29	57.95	61.24	74.00	12.76	Peak
5149.910	33.70	8.88	39.29	51.86	55.15	74.00	18.85	Peak
@ 5209.250	33.72	8.92	39.28	98.52	101.88	---	---	Peak

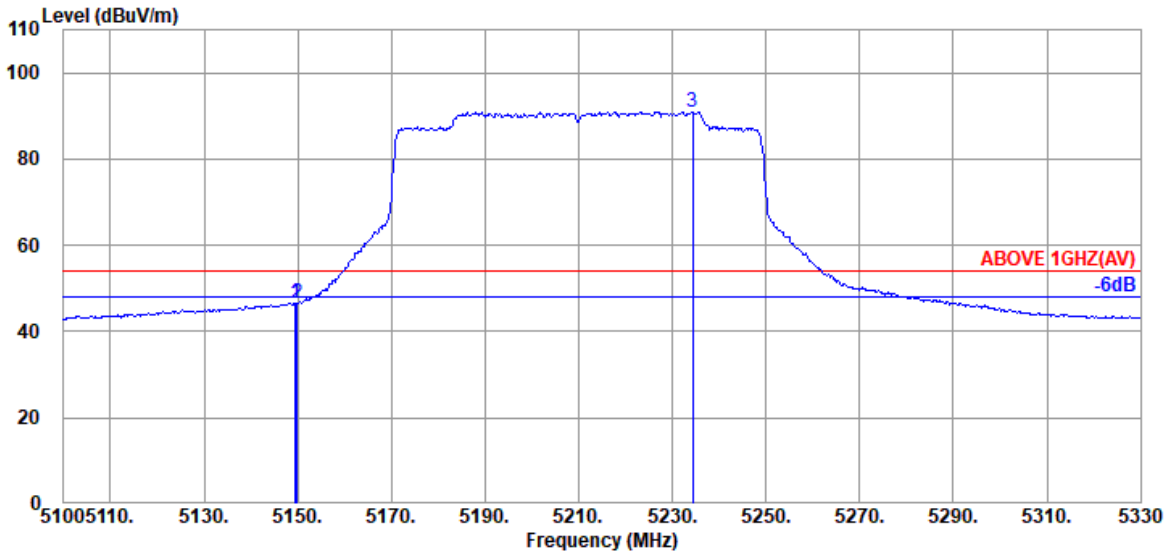


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	33.70	8.88	39.29	43.32	46.61	54.00	7.39	Average
5149.910	33.70	8.88	39.29	43.36	46.65	54.00	7.35	Average
@ 5234.320	33.78	8.93	39.28	87.44	90.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

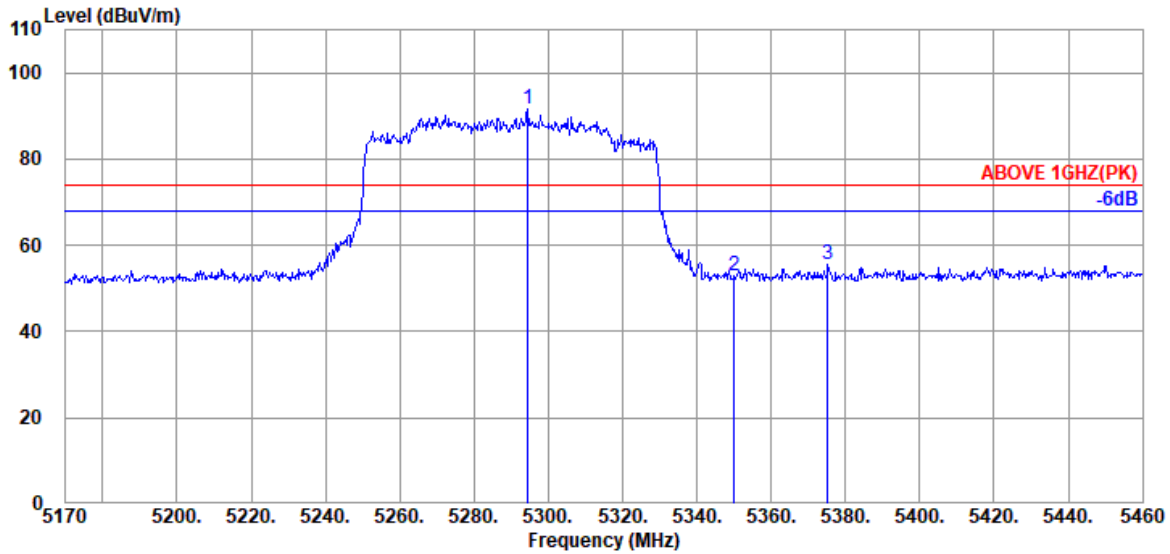

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.410	34.10	8.97	39.28	87.75	91.54	---	---	Peak
5350.090	33.90	8.99	39.27	49.49	53.11	74.00	20.89	Peak
5375.320	34.03	9.01	39.27	51.75	55.52	74.00	18.48	Peak

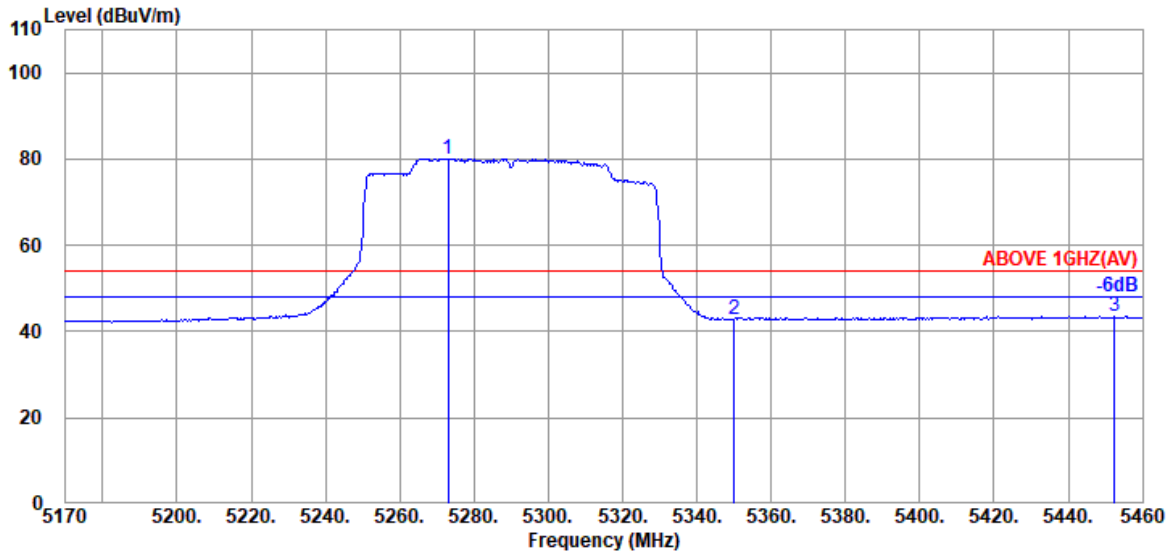


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.950	33.90	8.95	39.28	76.53	80.10	---	---	Average
5350.090	33.90	8.99	39.27	39.30	42.92	54.00	11.08	Average
5452.460	34.20	9.05	39.26	39.47	43.46	54.00	10.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

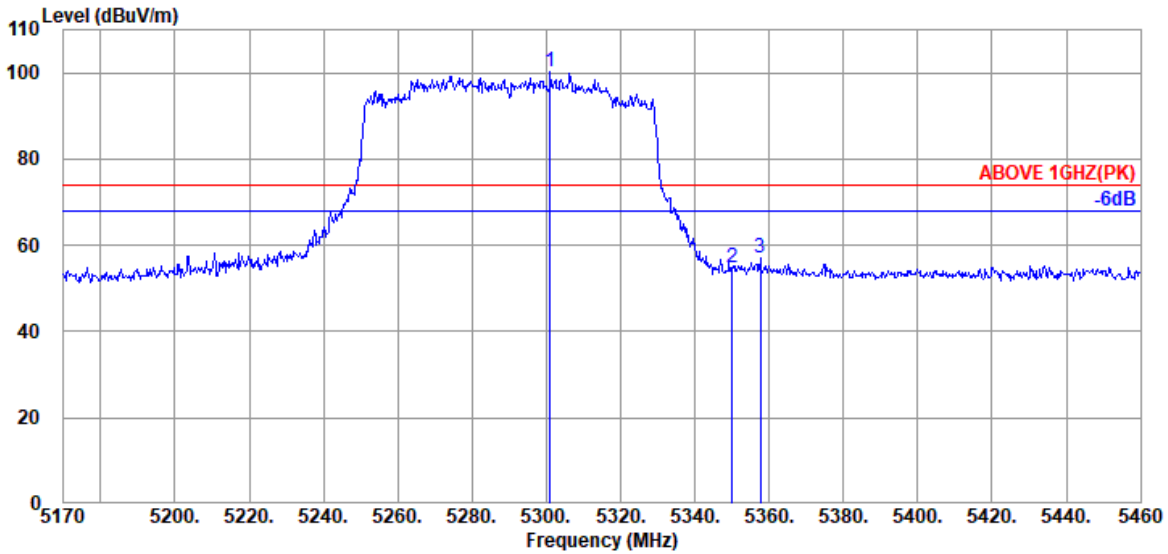

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.080	34.10	8.97	39.28	96.27	100.06	---	---	Peak
5350.090	33.90	8.99	39.27	51.34	54.96	74.00	19.04	Peak
5357.630	33.97	9.00	39.27	53.31	57.01	74.00	16.99	Peak

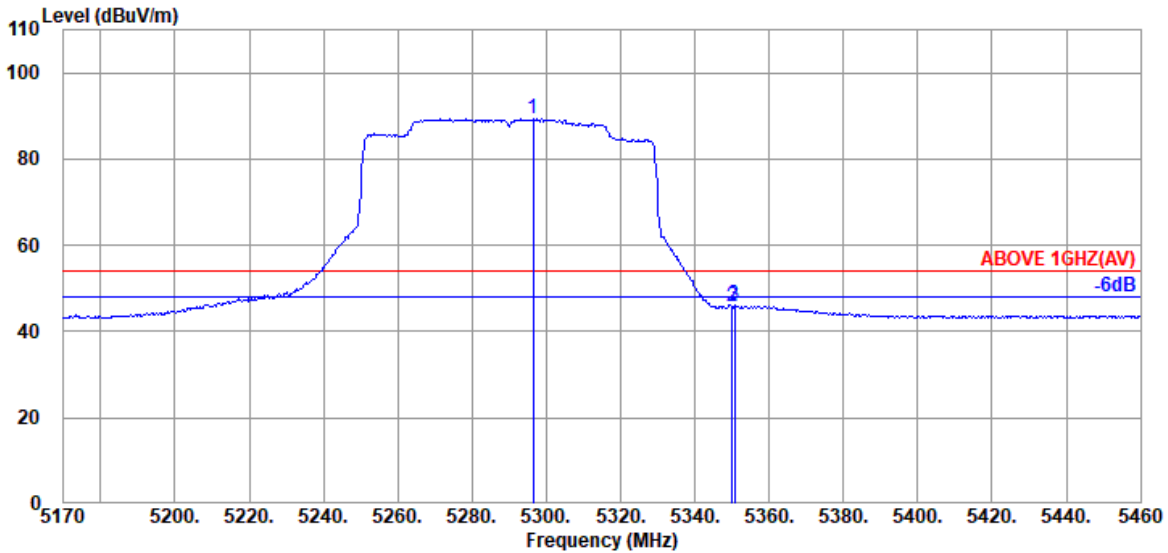


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.440	34.10	8.97	39.28	85.63	89.42	---	---	Average
5350.090	33.90	8.99	39.27	42.14	45.76	54.00	8.24	Average
5350.670	33.90	8.99	39.27	42.38	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

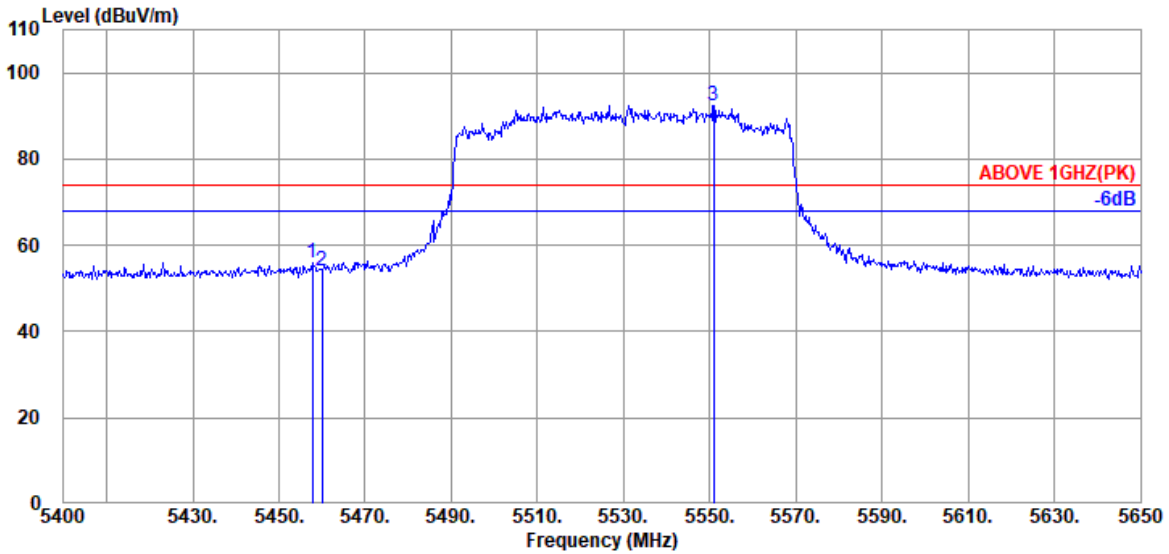

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.750	34.20	9.05	39.26	51.85	55.84	74.00	18.16	Peak
5460.000	34.20	9.05	39.26	50.04	54.03	74.00	19.97	Peak
@ 5551.000	34.10	9.10	39.27	88.47	92.40	---	---	Peak

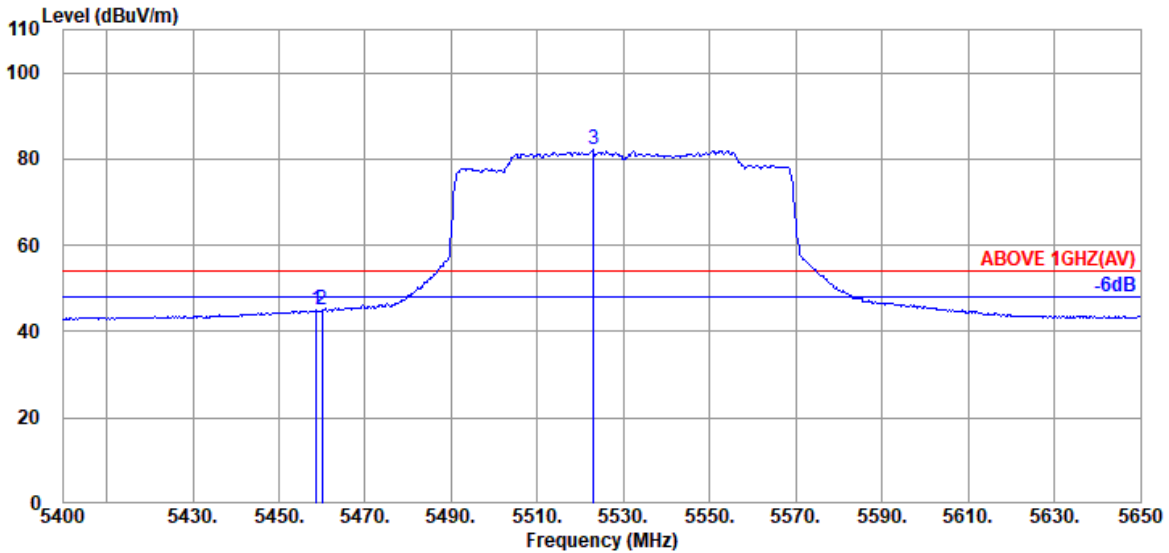


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.20	9.05	39.26	40.87	44.86	54.00	9.14	Average
5460.000	34.20	9.05	39.26	40.95	44.94	54.00	9.06	Average
@ 5523.000	34.10	9.09	39.26	78.10	82.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

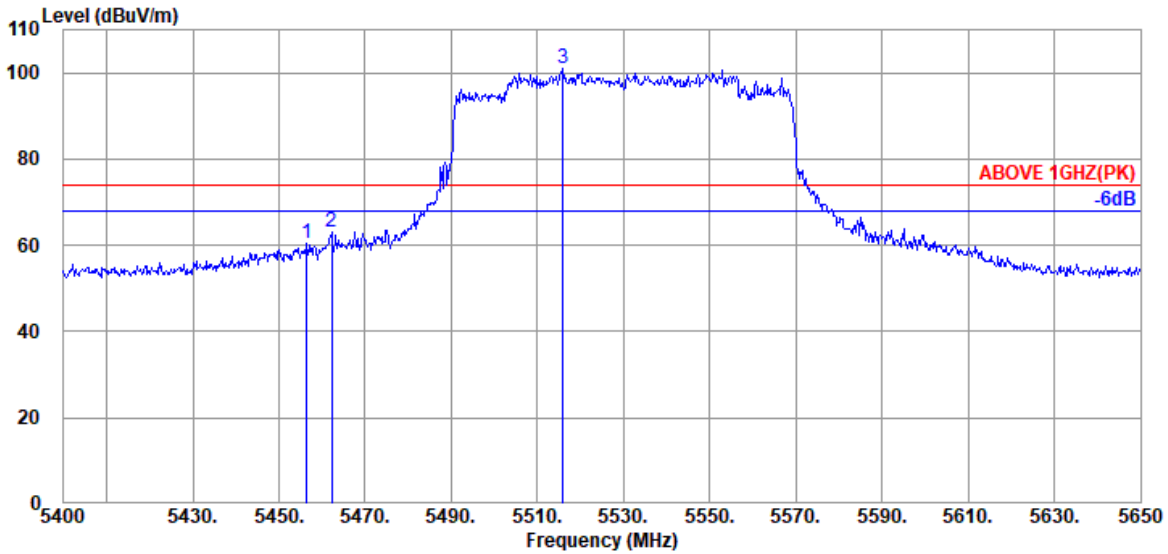

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.20	9.05	39.26	56.43	60.42	74.00	13.58	Peak
5462.250	34.20	9.05	39.26	59.22	63.21	74.00	10.79	Peak
@ 5516.000	34.10	9.09	39.26	97.01	100.94	---	---	Peak

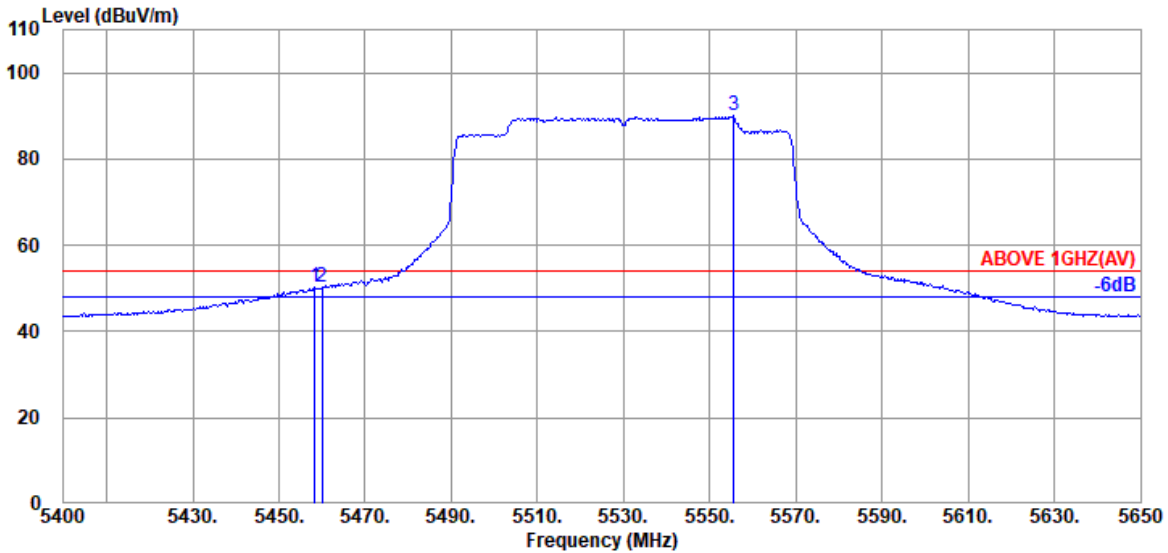


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.20	9.05	39.26	46.30	50.29	54.00	3.71	Average
5460.000	34.20	9.05	39.26	46.22	50.21	54.00	3.79	Average
@ 5555.500	34.10	9.10	39.27	86.06	89.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

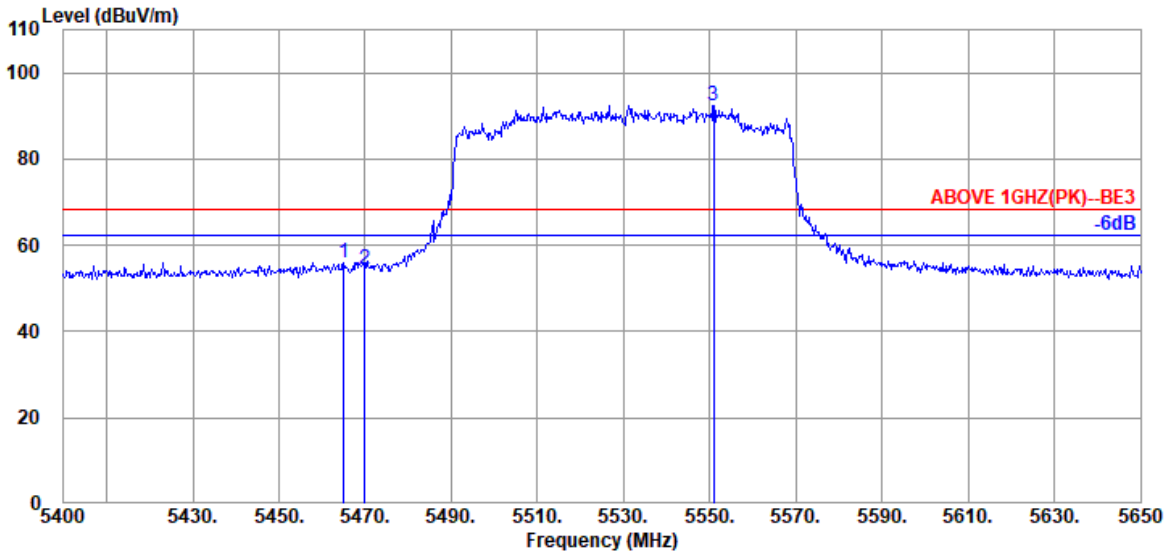

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	9.06	39.26	52.04	56.01	68.20	12.19	Peak
5470.000	34.17	9.06	39.26	50.34	54.31	68.20	13.89	Peak
@ 5551.000	34.10	9.10	39.27	88.47	92.40	---	---	Peak

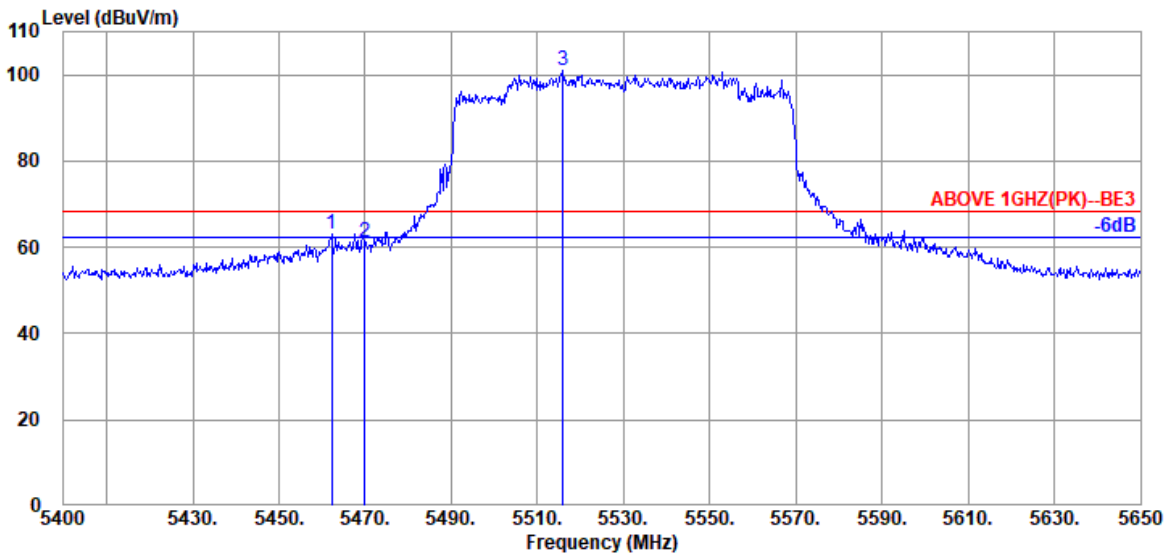


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.250	34.20	9.05	39.26	59.22	63.21	68.20	4.99	Peak
5470.000	34.17	9.06	39.26	57.08	61.05	68.20	7.15	Peak
@ 5516.000	34.10	9.09	39.26	97.01	100.94	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

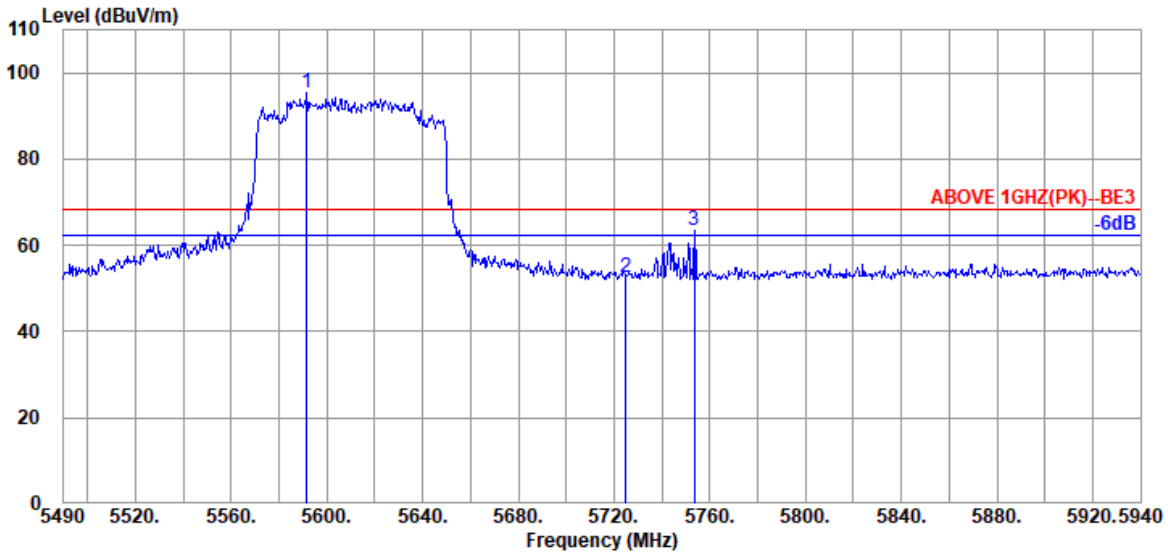

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.700	34.00	9.13	39.28	91.43	95.28	---	---	Peak
5724.900	33.80	9.20	39.30	48.98	52.68	68.20	15.52	Peak
5753.700	33.80	9.20	39.31	59.94	63.63	68.20	4.57	Peak

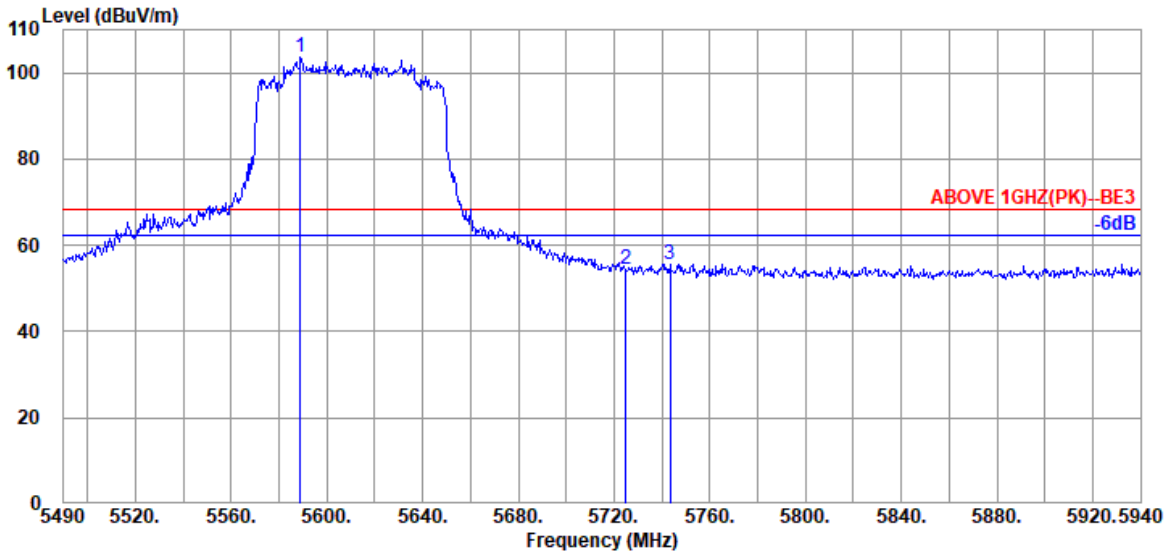


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.000	34.03	9.12	39.28	99.67	103.54	---	---	Peak
5724.900	33.80	9.20	39.30	50.89	54.59	68.20	13.61	Peak
5743.350	33.80	9.20	39.31	52.06	55.75	68.20	12.45	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


● Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

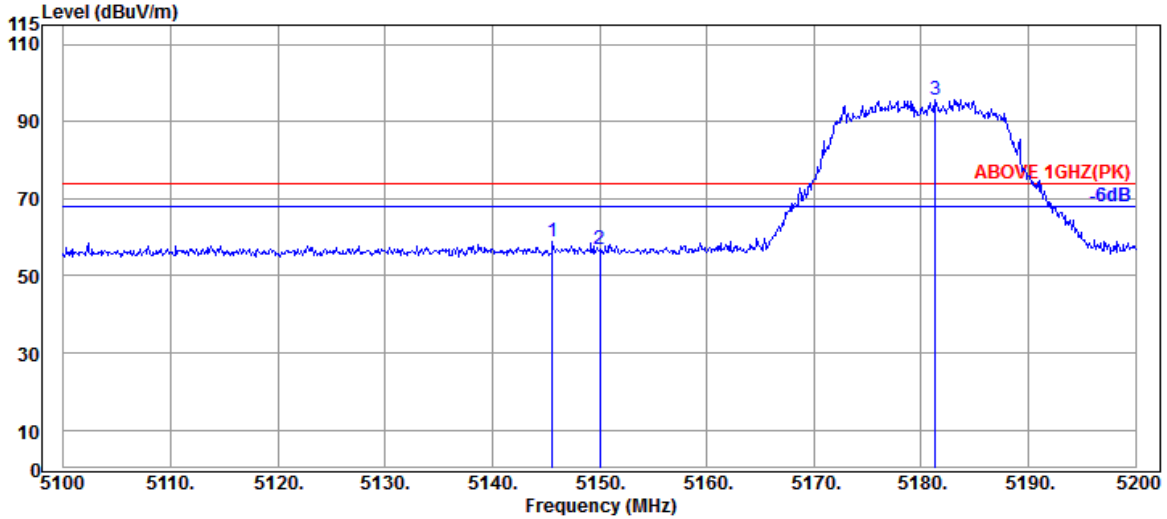

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	34.50	8.88	34.34	49.69	58.73	74.00	15.27	Peak
5150.000	34.50	8.88	34.34	47.96	57.00	74.00	17.00	Peak
@ 5181.300	34.63	8.90	34.32	86.55	95.76	---	---	Peak

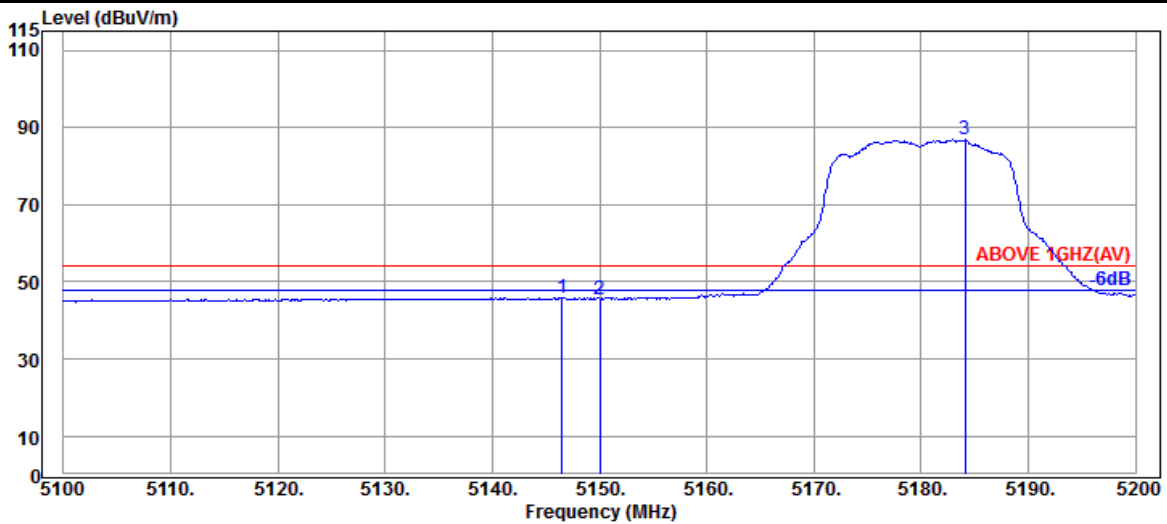


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.50	8.88	34.34	36.85	45.89	54.00	8.11	Average
5150.000	34.50	8.88	34.34	36.53	45.57	54.00	8.43	Average
@ 5184.100	34.63	8.90	34.32	77.68	86.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

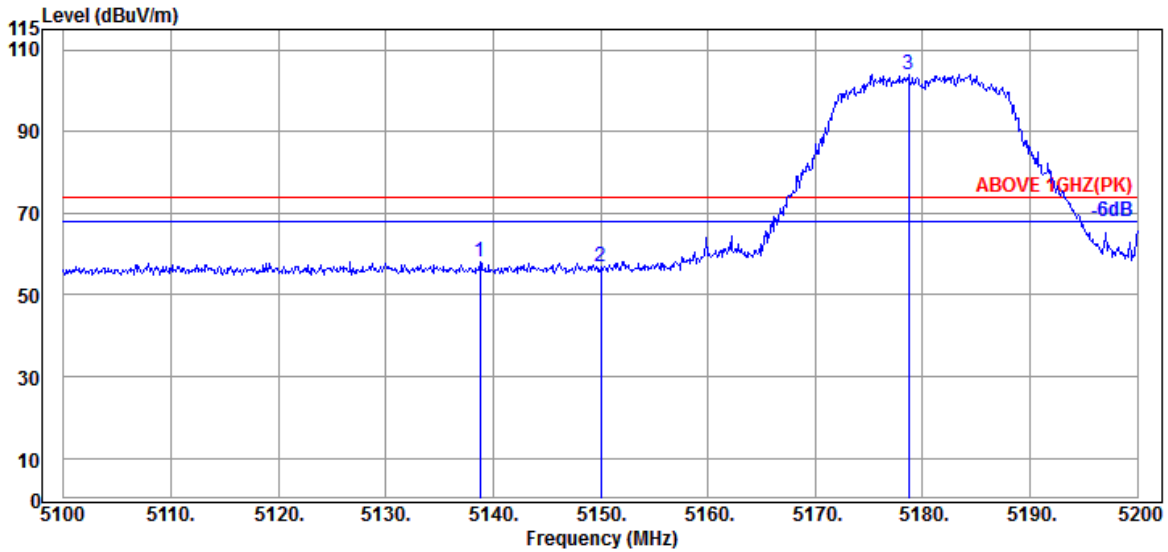

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.800	34.40	8.88	34.34	49.20	58.14	74.00	15.86	Peak
5150.000	34.50	8.88	34.34	48.03	57.07	74.00	16.93	Peak
@ 5178.700	34.63	8.90	34.32	94.89	104.10	---	---	Peak

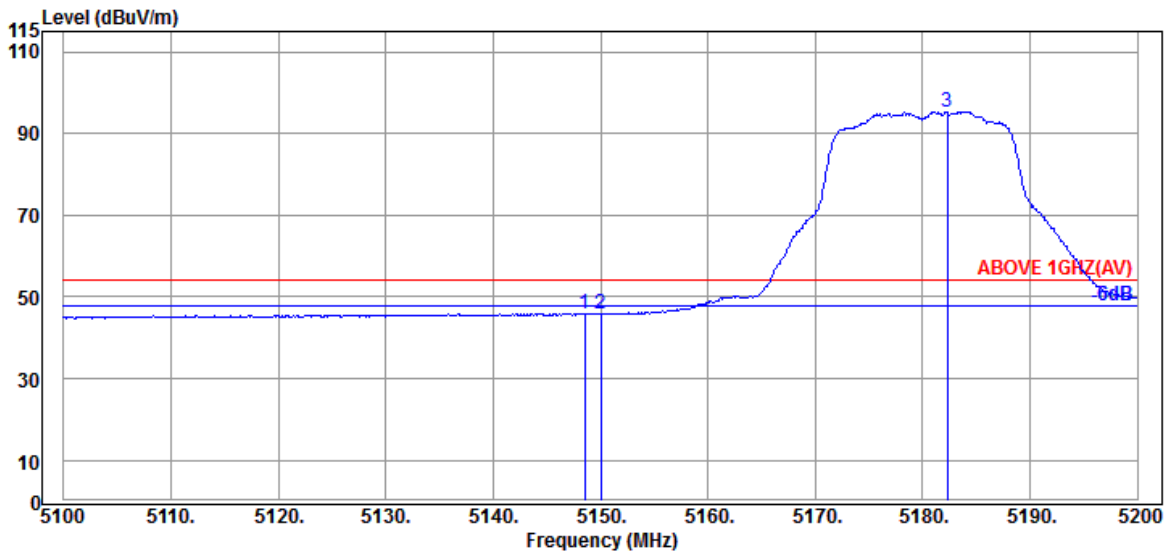


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	34.50	8.88	34.34	36.92	45.96	54.00	8.04	Average
5150.000	34.50	8.88	34.34	36.74	45.78	54.00	8.22	Average
@ 5182.300	34.63	8.90	34.32	86.09	95.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

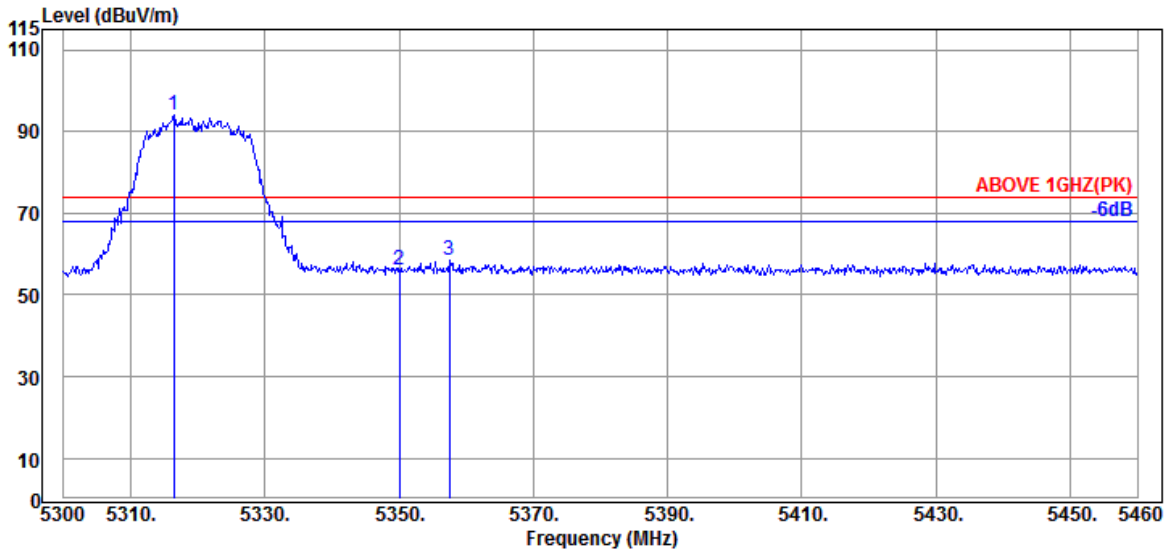

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.57	8.98	34.27	84.62	93.90	---	---	Peak
5350.080	34.90	8.99	34.26	46.64	56.27	74.00	17.73	Peak
5357.440	34.87	9.00	34.26	48.87	58.48	74.00	15.52	Peak

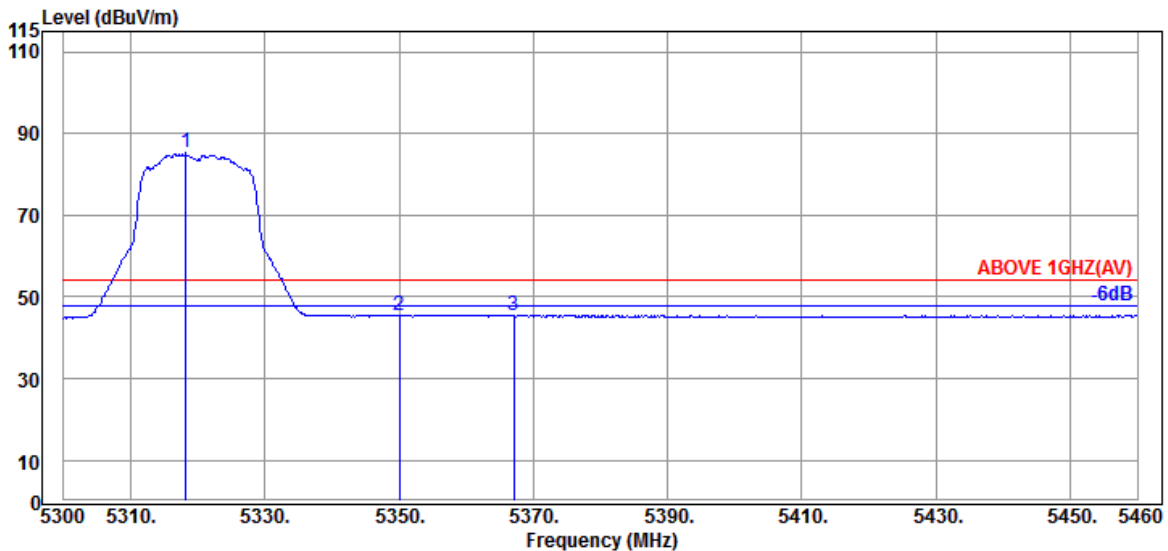


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.57	8.98	34.27	75.91	85.19	---	---	Average
5350.080	34.90	8.99	34.26	35.81	45.44	54.00	8.56	Average
5367.040	34.87	9.00	34.25	35.97	45.59	54.00	8.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

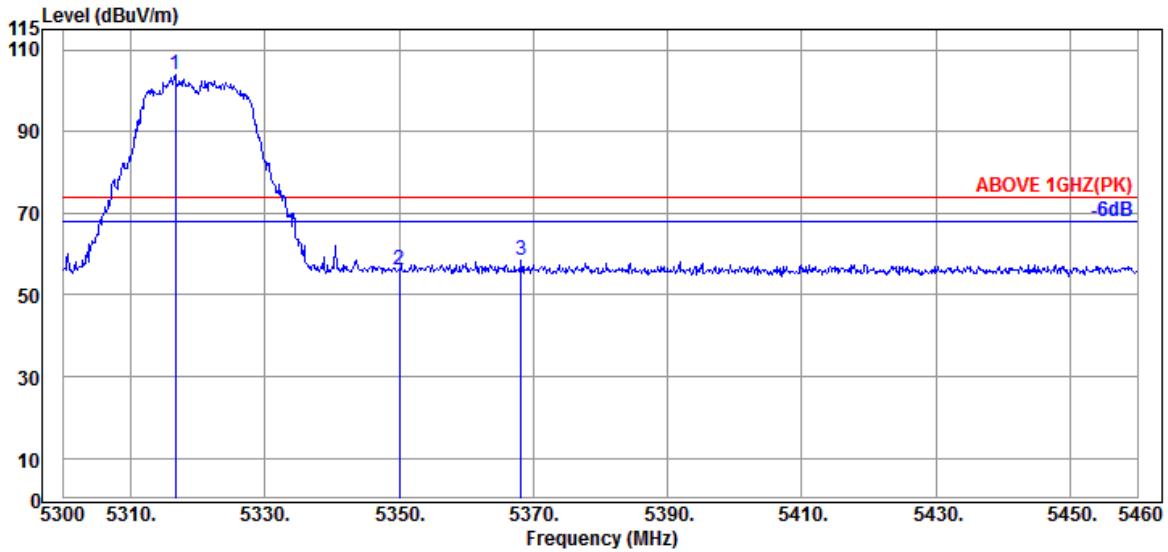

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.57	8.98	34.27	94.60	103.88	---	---	Peak
5350.080	34.90	8.99	34.26	46.38	56.01	74.00	17.99	Peak
5368.160	34.87	9.00	34.25	48.90	58.52	74.00	15.48	Peak

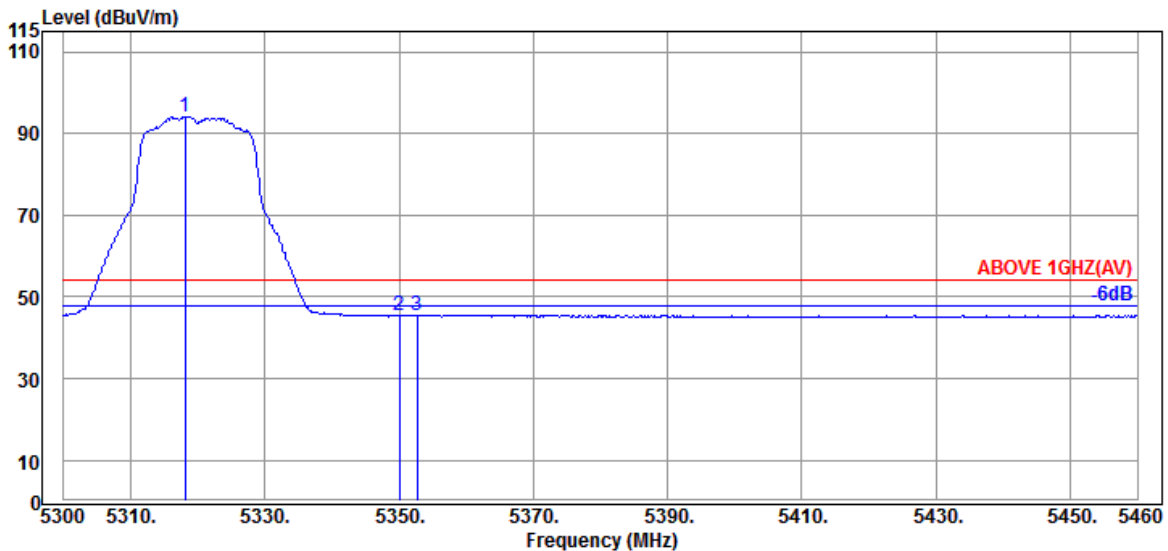


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.57	8.98	34.27	84.90	94.18	---	---	Average
5350.080	34.90	8.99	34.26	35.69	45.32	54.00	8.68	Average
5352.640	34.90	8.99	34.26	36.01	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

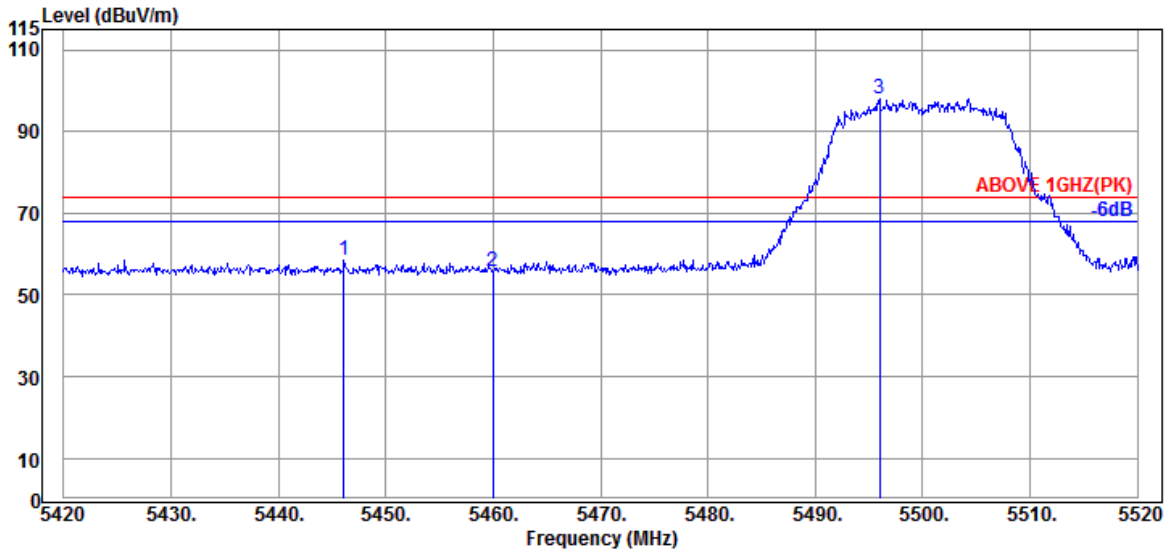

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.100	34.65	9.04	34.22	49.01	58.48	74.00	15.52	Peak
5460.000	34.60	9.05	34.21	46.39	55.83	74.00	18.17	Peak
@ 5496.000	34.70	9.08	34.20	88.25	97.83	---	---	Peak

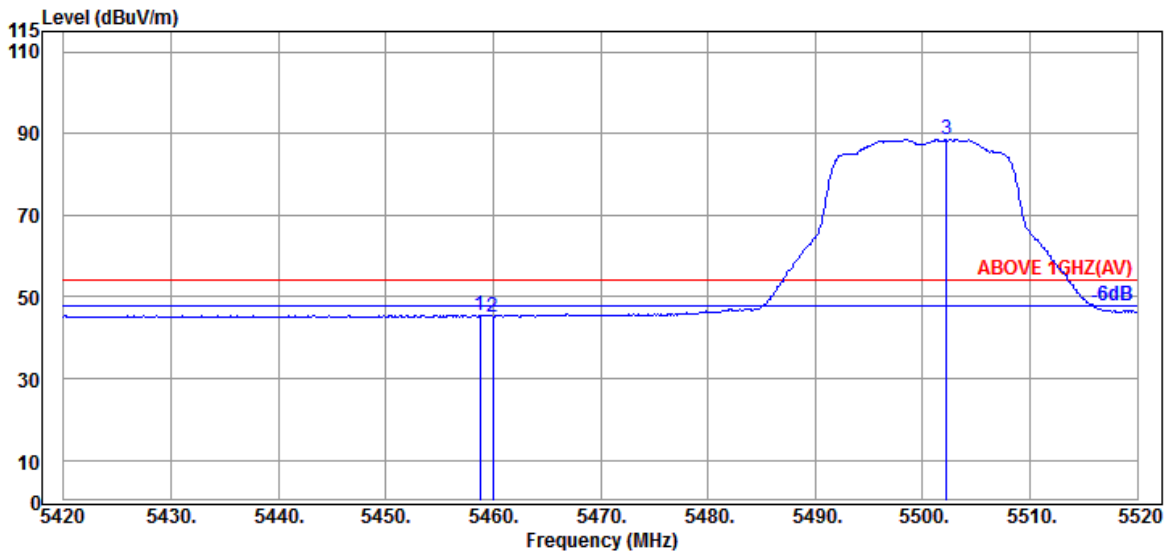


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.800	34.60	9.05	34.21	36.16	45.60	54.00	8.40	Average
5460.000	34.60	9.05	34.21	35.78	45.22	54.00	8.78	Average
@ 5502.200	34.70	9.08	34.20	79.01	88.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

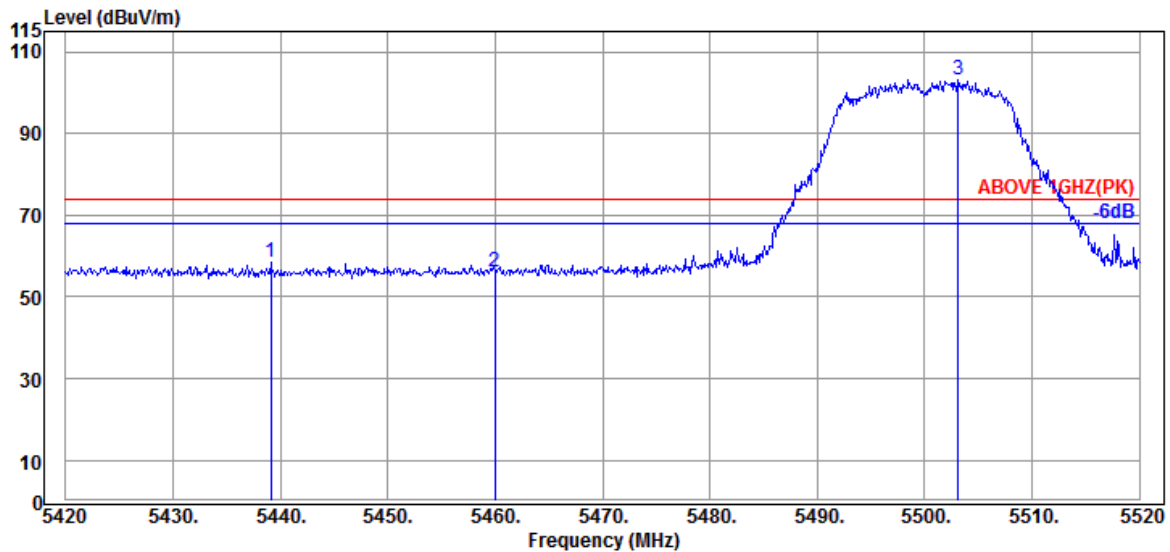

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.100	34.65	9.04	34.22	48.98	58.45	74.00	15.55	Peak
5460.000	34.60	9.05	34.21	46.75	56.19	74.00	17.81	Peak
@ 5503.100	34.70	9.08	34.20	93.45	103.03	---	---	Peak

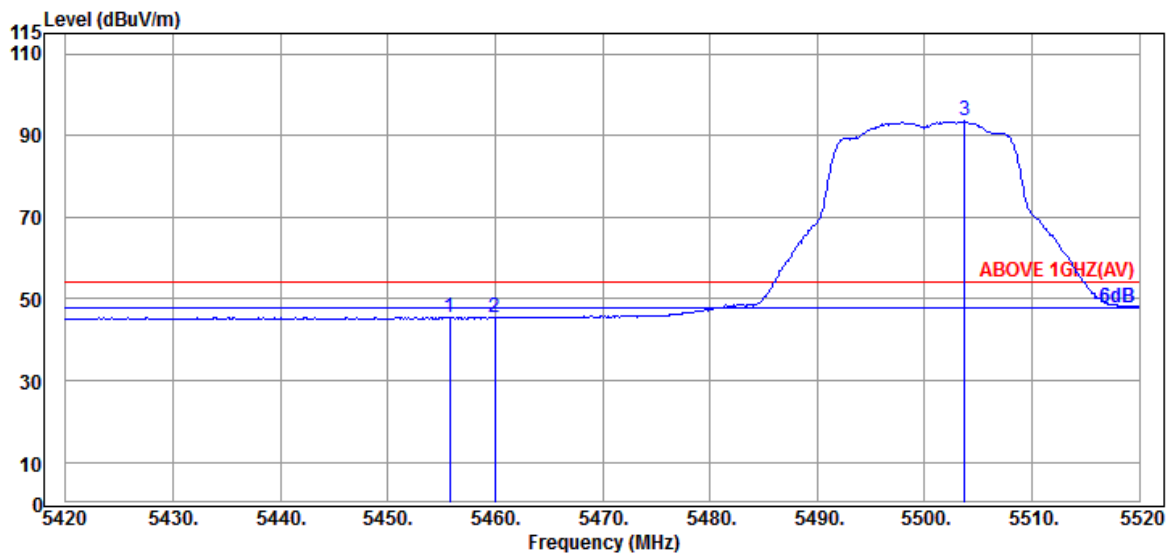


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.60	9.05	34.21	36.09	45.53	54.00	8.47	Average
5460.000	34.60	9.05	34.21	35.86	45.30	54.00	8.70	Average
@ 5503.700	34.70	9.08	34.20	83.99	93.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

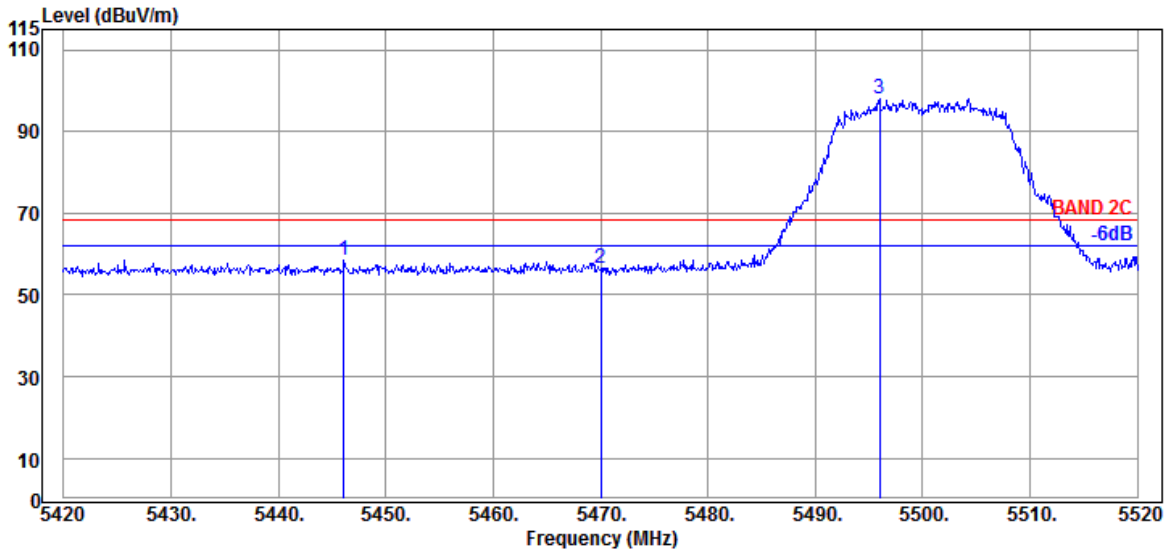

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5446.100	34.65	9.04	34.22	49.01	58.48	68.20	9.72	Peak
5470.000	34.63	9.06	34.21	47.02	56.50	68.20	11.70	Peak
5496.000	34.70	9.08	34.20	88.25	97.83	---	---	Peak

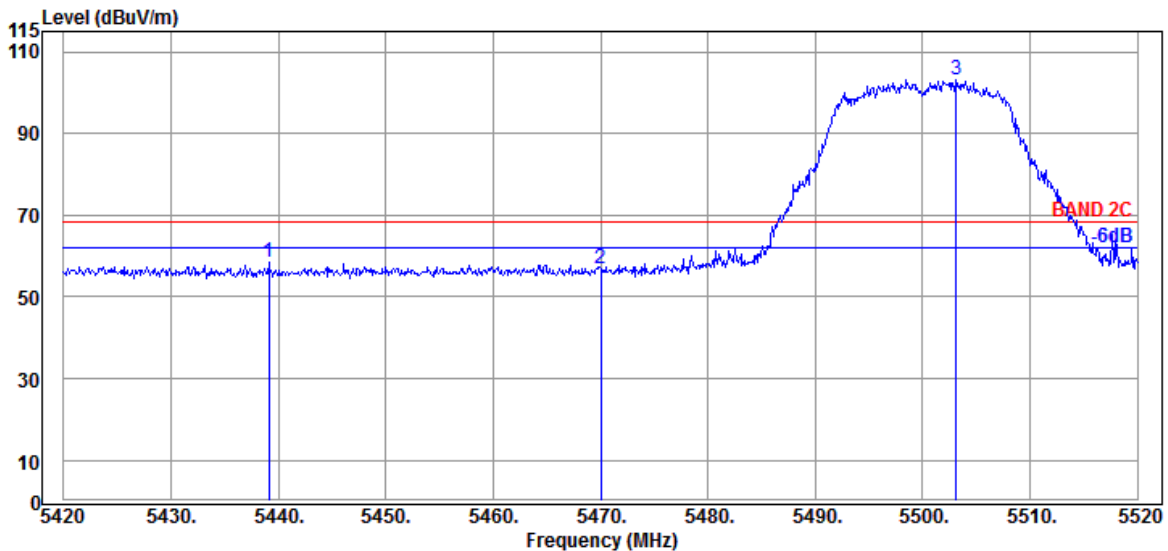


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5439.100	34.65	9.04	34.22	48.98	58.45	68.20	9.75	Peak
5470.000	34.63	9.06	34.21	47.48	56.96	68.20	11.24	Peak
5503.100	34.70	9.08	34.20	93.45	103.03	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

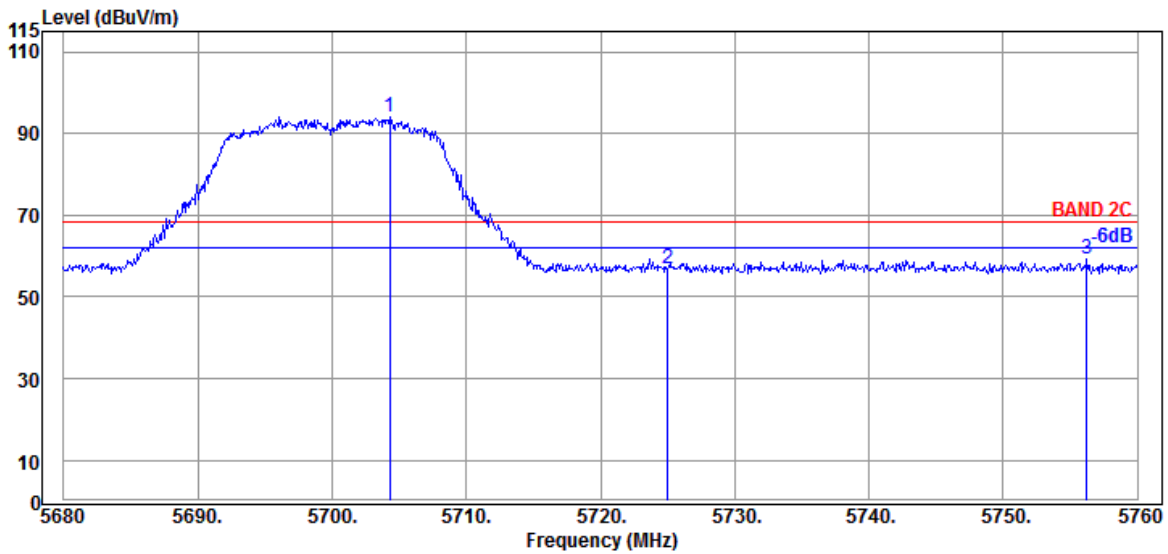

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.320	34.70	9.18	34.29	84.48	94.07	---	---	Peak
5725.040	34.90	9.20	34.30	46.98	56.78	68.20	11.42	Peak
5756.240	35.03	9.21	34.32	49.36	59.28	68.20	8.92	Peak

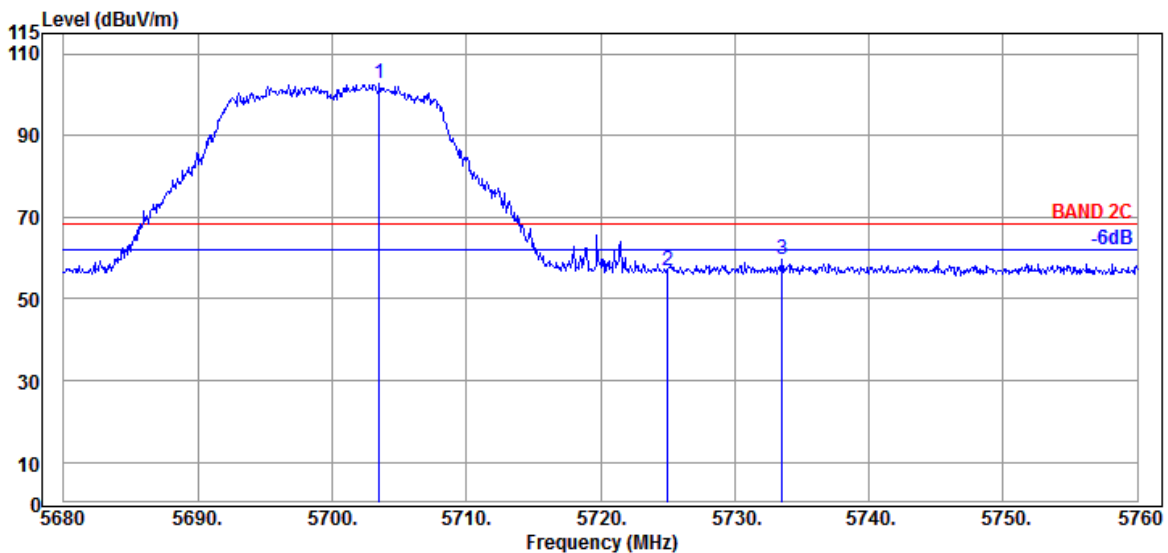


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.520	34.70	9.18	34.29	93.06	102.65	---	---	Peak
5725.040	34.90	9.20	34.30	46.95	56.75	68.20	11.45	Peak
5733.520	34.90	9.20	34.31	49.75	59.54	68.20	8.66	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

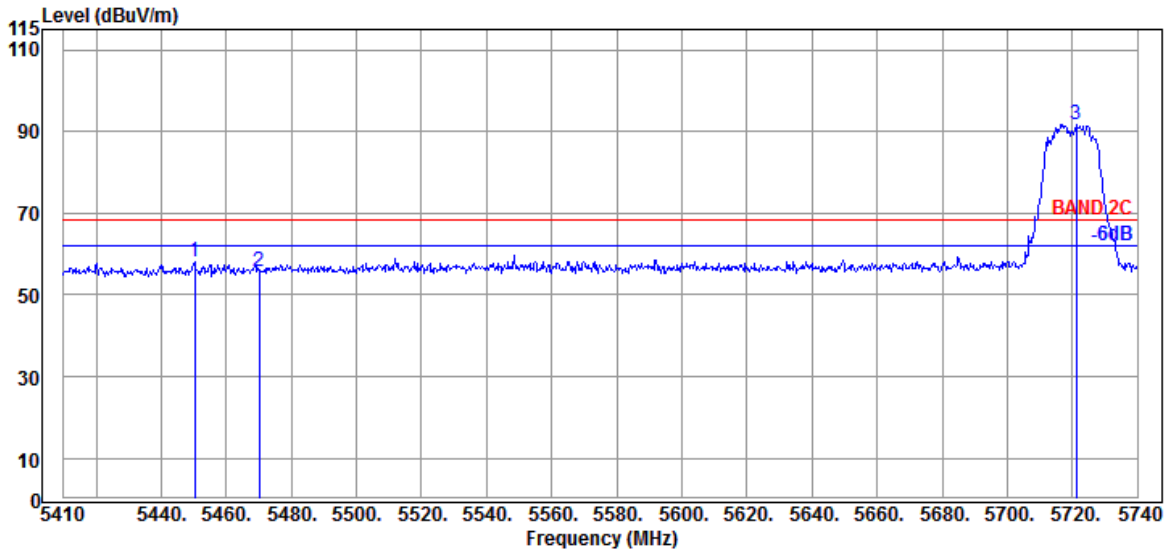

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5450.260	34.60	9.05	34.22	48.72	58.15	68.20	10.05	Peak
5470.060	34.63	9.06	34.21	46.24	55.72	68.20	12.48	Peak
5721.190	34.80	9.19	34.30	82.09	91.78	---	---	Peak

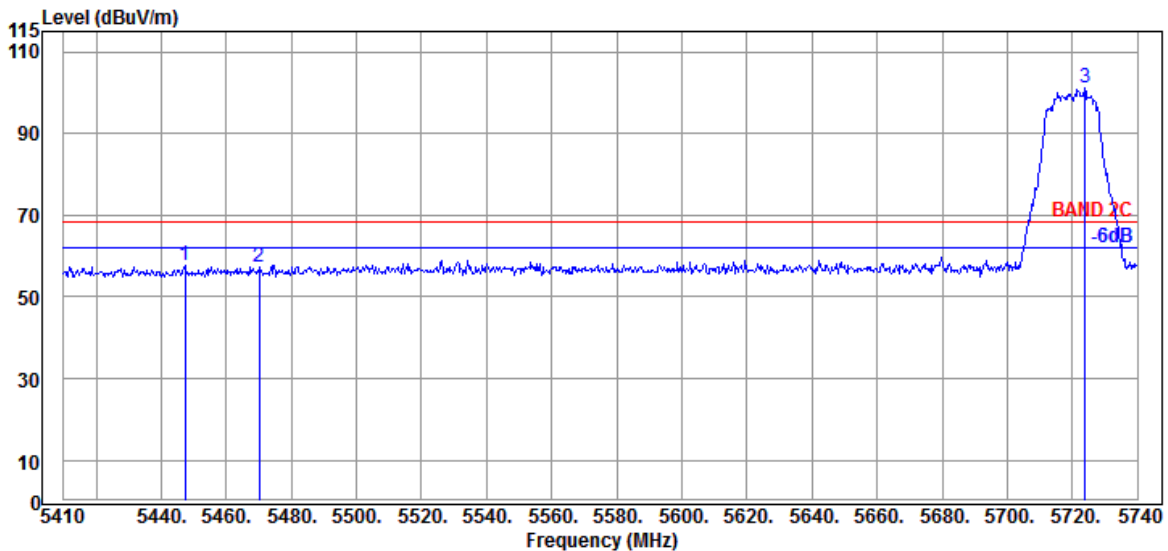


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5447.290	34.65	9.04	34.22	48.33	57.80	68.20	10.40	Peak
5470.060	34.63	9.06	34.21	47.79	57.27	68.20	10.93	Peak
5723.830	34.90	9.20	34.30	91.55	101.35	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

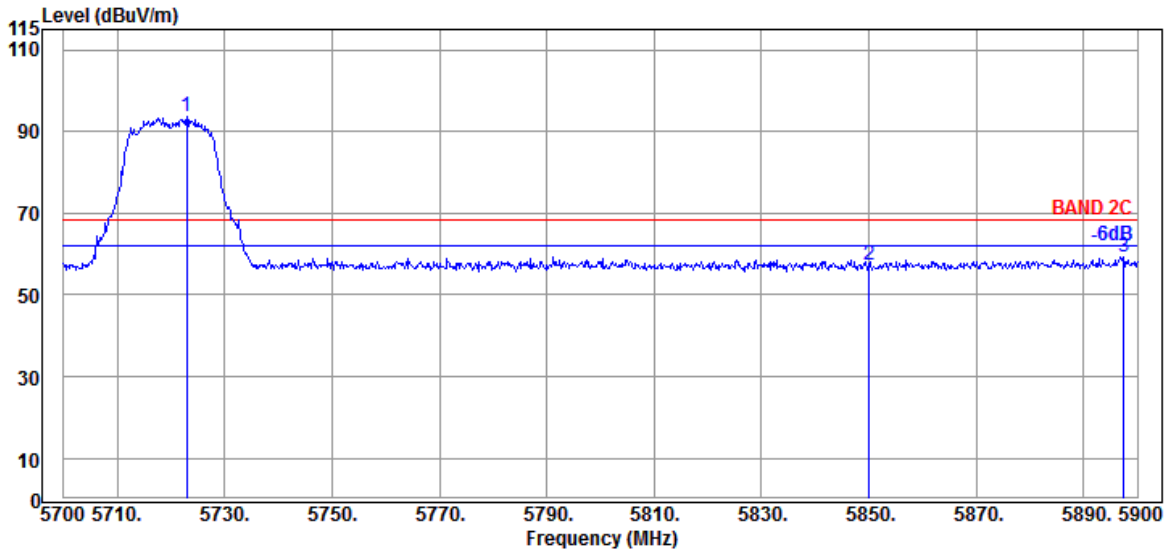

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.000	34.90	9.20	34.30	83.77	93.57	---	---	Peak
5850.000	35.40	9.25	34.36	47.08	57.37	68.20	10.83	Peak
5897.400	35.80	9.28	34.38	48.51	59.21	68.20	8.99	Peak

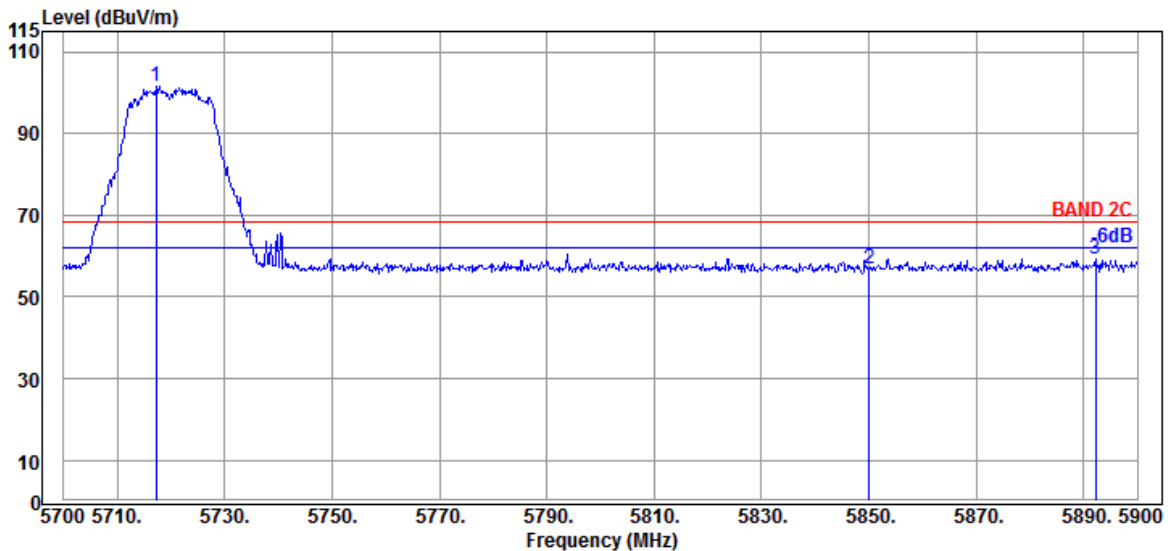


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.200	34.80	9.19	34.30	91.93	101.62	---	---	Peak
5850.000	35.40	9.25	34.36	46.78	57.07	68.20	11.13	Peak
5892.200	35.80	9.28	34.38	48.68	59.38	68.20	8.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

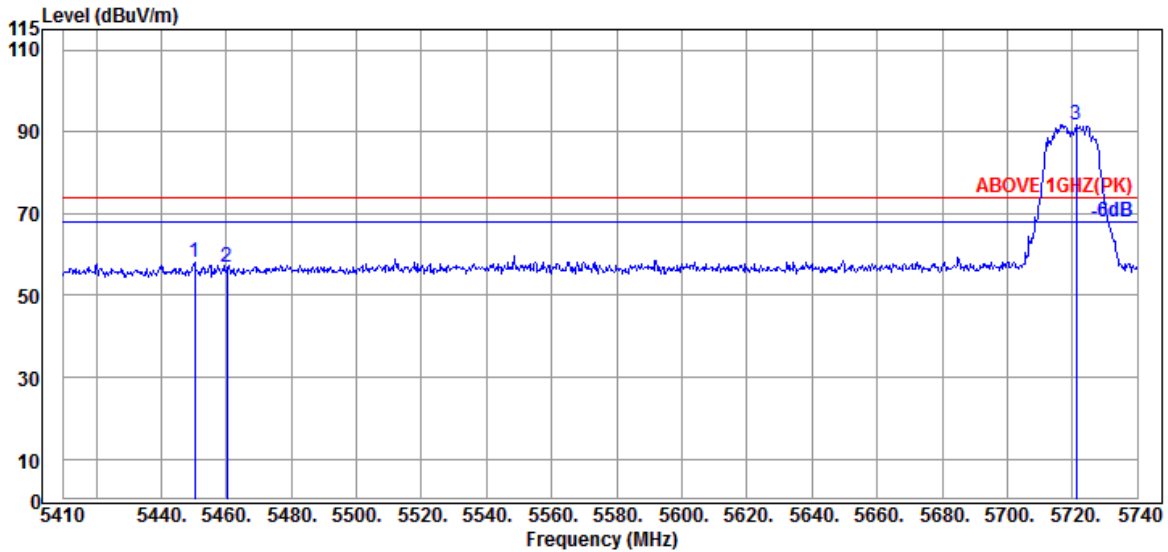

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.260	34.60	9.05	34.22	48.72	58.15	74.00	15.85	Peak
5460.160	34.60	9.05	34.21	47.45	56.89	74.00	17.11	Peak
@ 5721.190	34.80	9.19	34.30	82.09	91.78	---	---	Peak

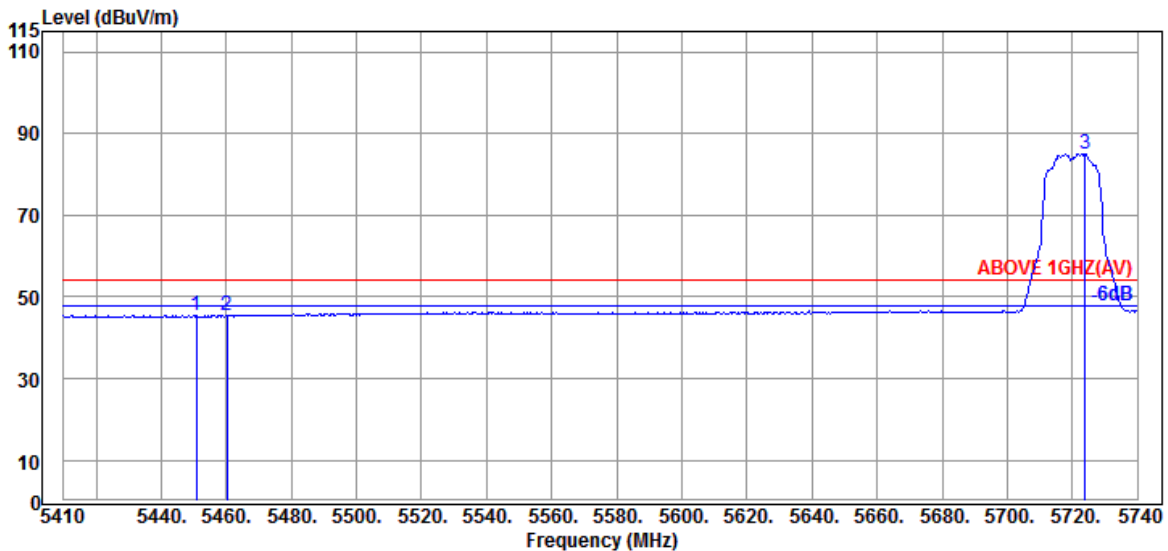


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.920	34.60	9.05	34.22	36.11	45.54	54.00	8.46	Average
5460.160	34.60	9.05	34.21	35.82	45.26	54.00	8.74	Average
@ 5723.830	34.90	9.20	34.30	75.30	85.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

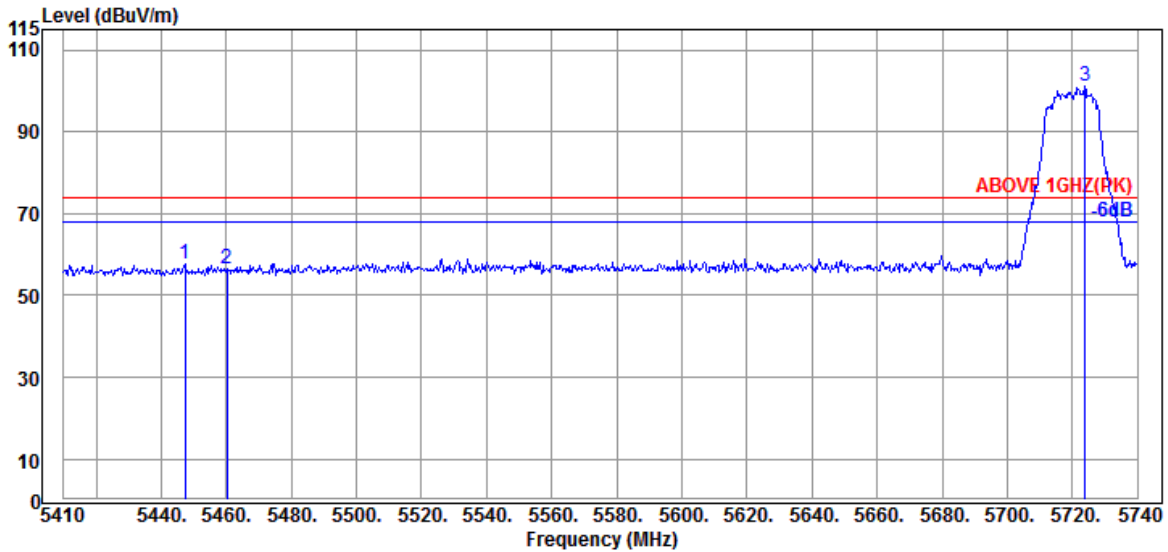

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.290	34.65	9.04	34.22	48.33	57.80	74.00	16.20	Peak
5460.160	34.60	9.05	34.21	46.90	56.34	74.00	17.66	Peak
@ 5723.830	34.90	9.20	34.30	91.55	101.35	---	---	Peak

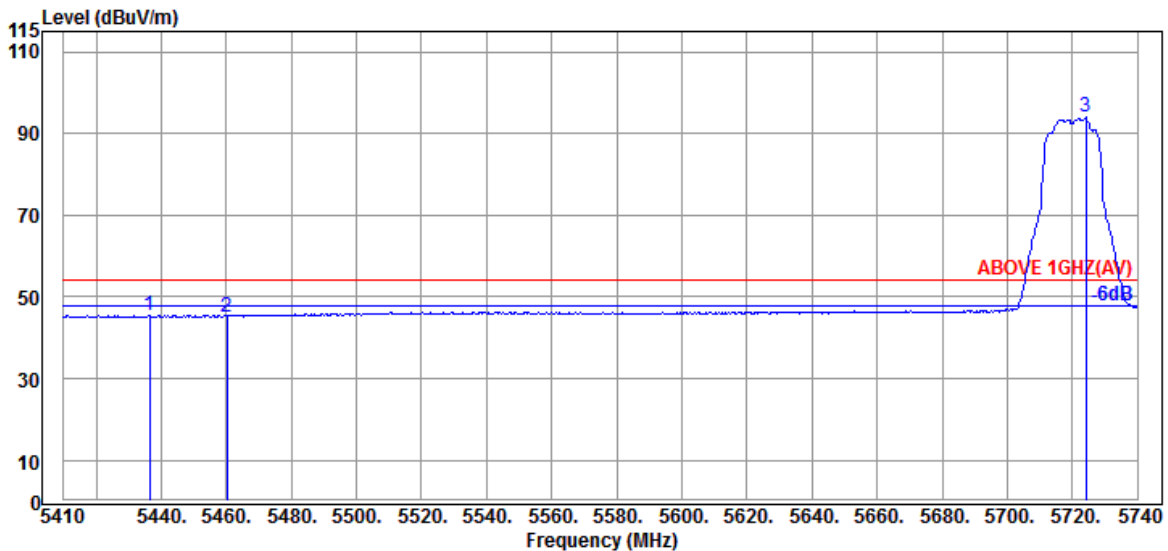


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.400	34.65	9.04	34.22	35.92	45.39	54.00	8.61	Average
5460.160	34.60	9.05	34.21	35.79	45.23	54.00	8.77	Average
@ 5724.160	34.90	9.20	34.30	84.06	93.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

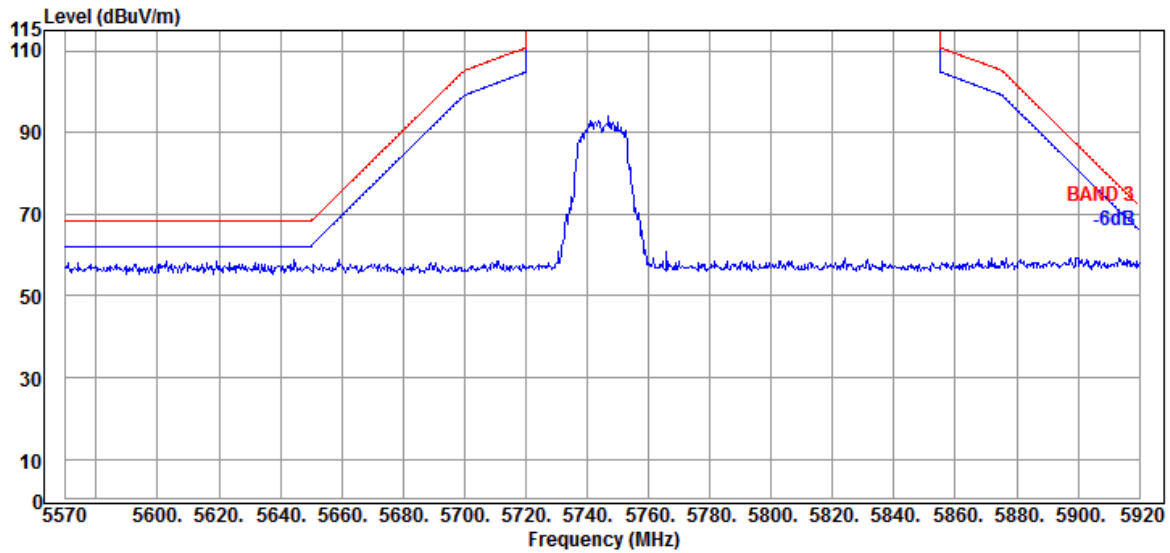


Antenna at Vertical Polarization

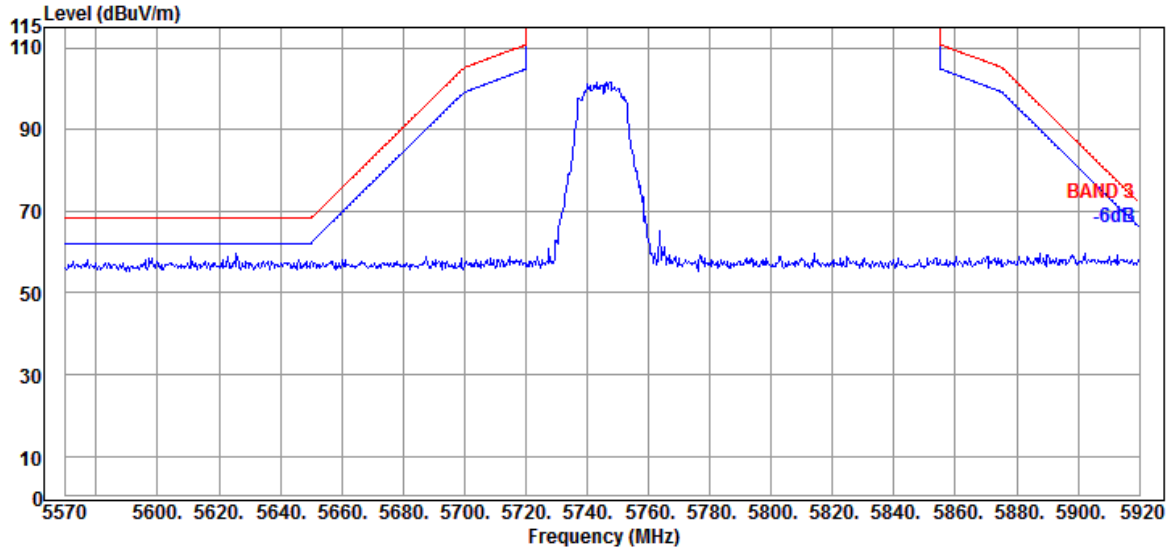


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

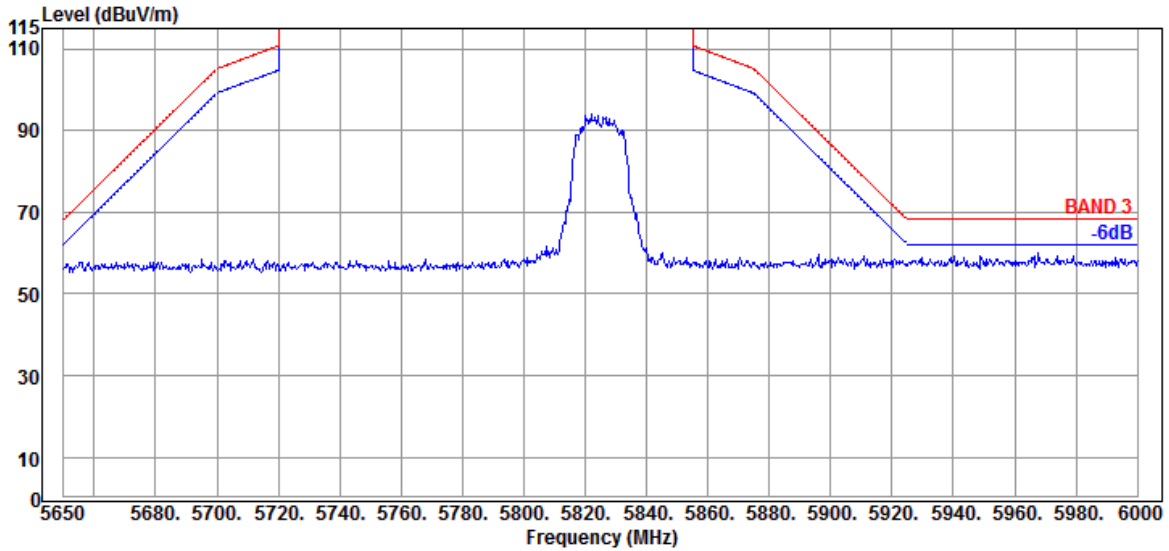

Antenna at Vertical Polarization

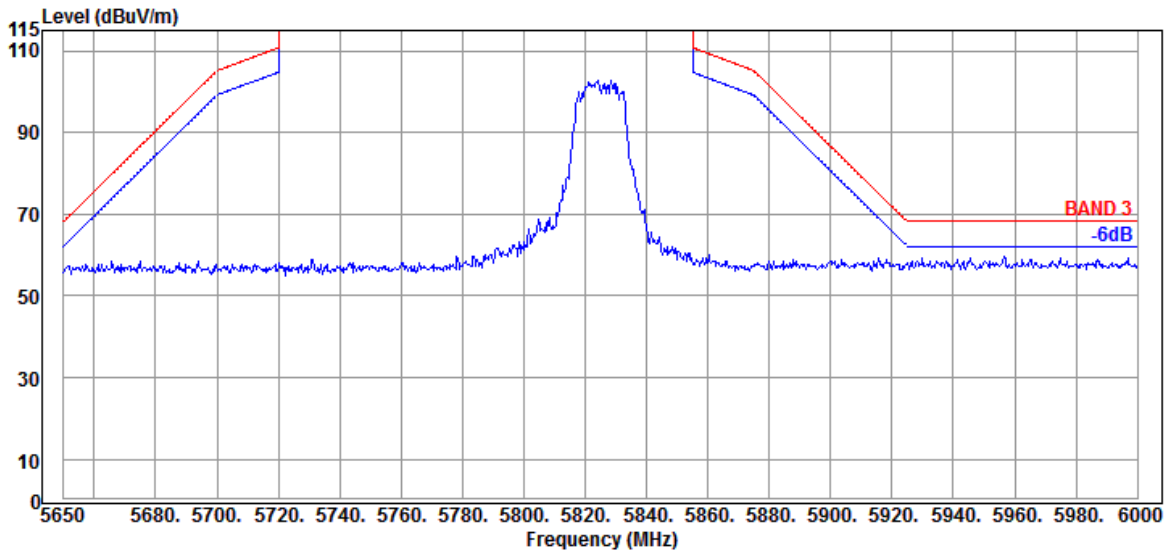


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

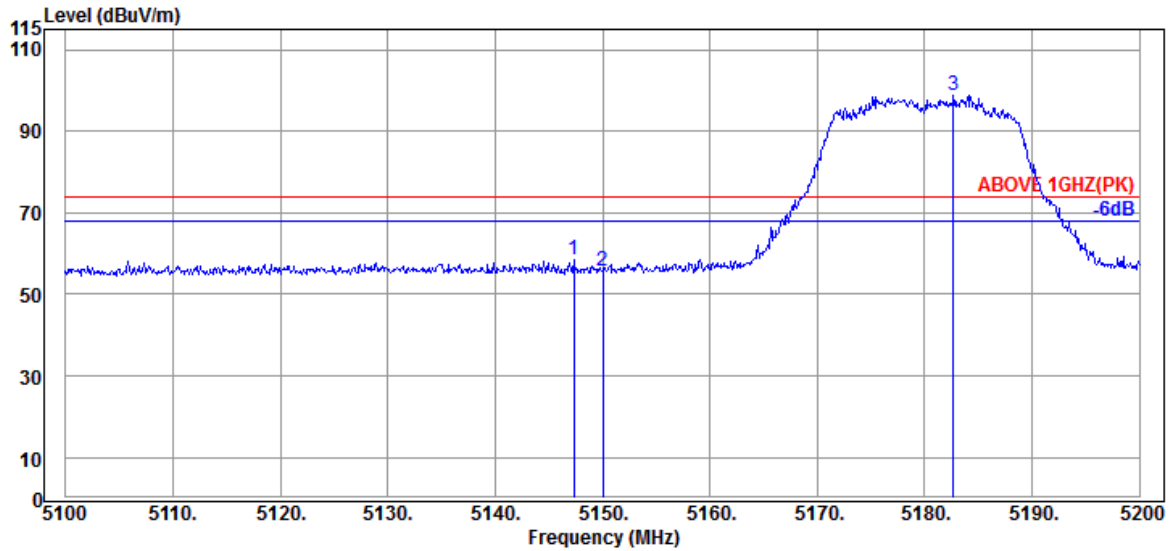

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	34.50	8.88	34.34	49.43	58.47	74.00	15.53	Peak
5150.000	34.50	8.88	34.34	46.78	55.82	74.00	18.18	Peak
@ 5182.700	34.63	8.90	34.32	89.60	98.81	---	---	Peak

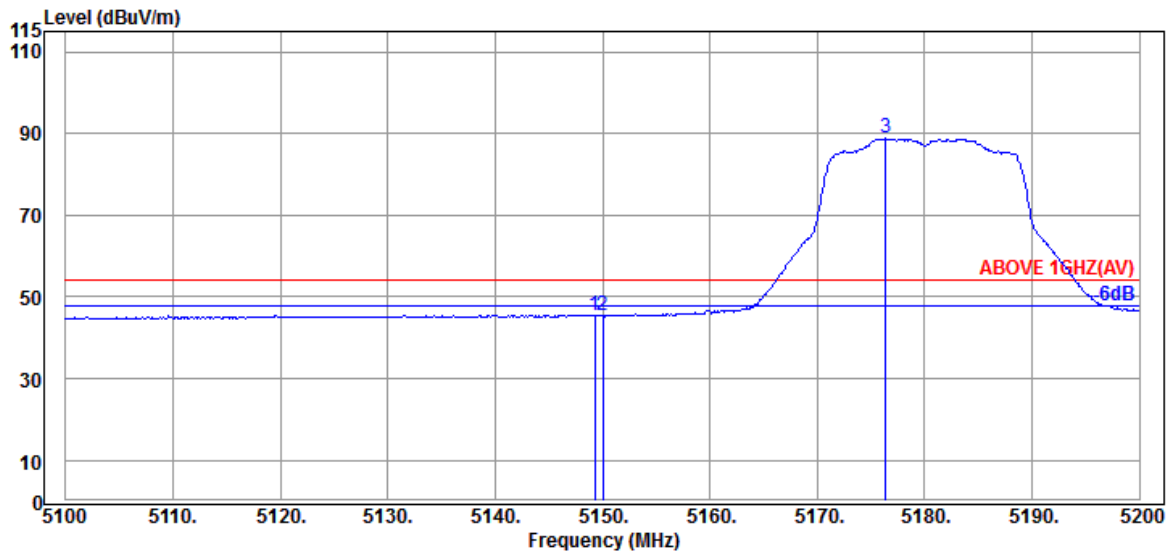


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.50	8.88	34.34	36.57	45.61	54.00	8.39	Average
5150.000	34.50	8.88	34.34	36.34	45.38	54.00	8.62	Average
@ 5176.400	34.63	8.90	34.32	79.54	88.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

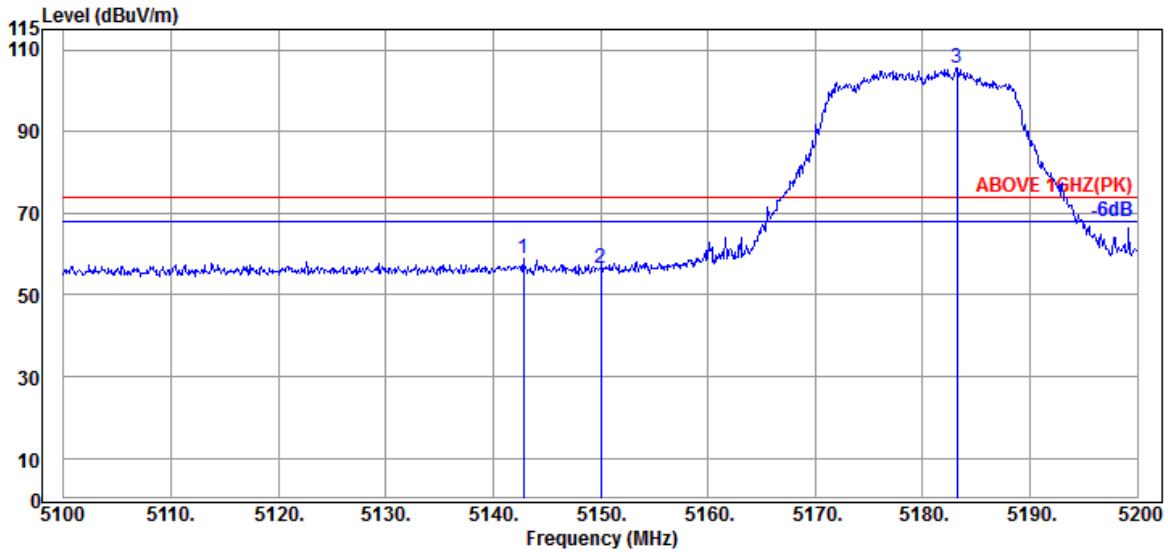

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.800	34.50	8.88	34.34	49.67	58.71	74.00	15.29	Peak
5150.000	34.50	8.88	34.34	47.36	56.40	74.00	17.60	Peak
@ 5183.200	34.63	8.90	34.32	96.26	105.47	---	---	Peak

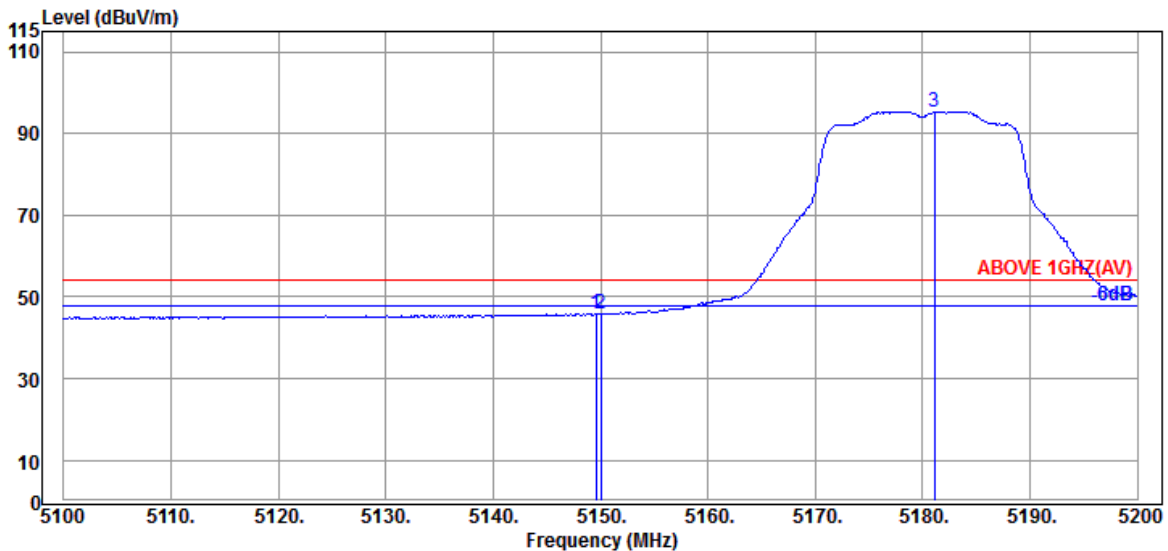


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.88	34.34	36.82	45.86	54.00	8.14	Average
5150.000	34.50	8.88	34.34	36.87	45.91	54.00	8.09	Average
@ 5181.100	34.63	8.90	34.32	86.22	95.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

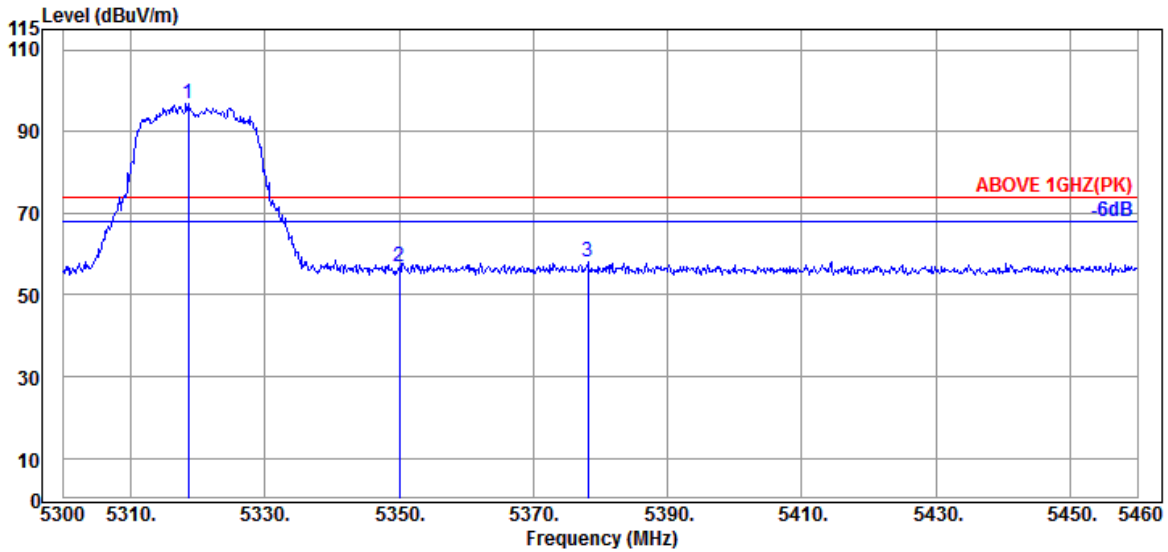

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	34.57	8.98	34.27	87.55	96.83	---	---	Peak
5350.080	34.90	8.99	34.26	47.30	56.93	74.00	17.07	Peak
5378.080	34.83	9.01	34.25	48.45	58.04	74.00	15.96	Peak

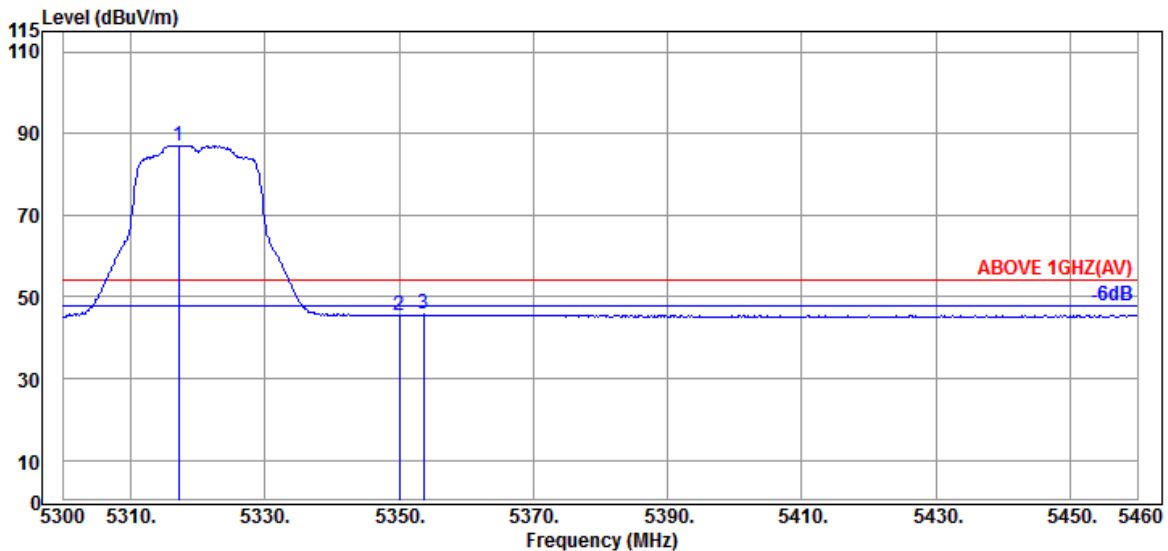


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.57	8.98	34.27	77.86	87.14	---	---	Average
5350.080	34.90	8.99	34.26	35.89	45.52	54.00	8.48	Average
5353.600	34.90	8.99	34.26	36.03	45.66	54.00	8.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

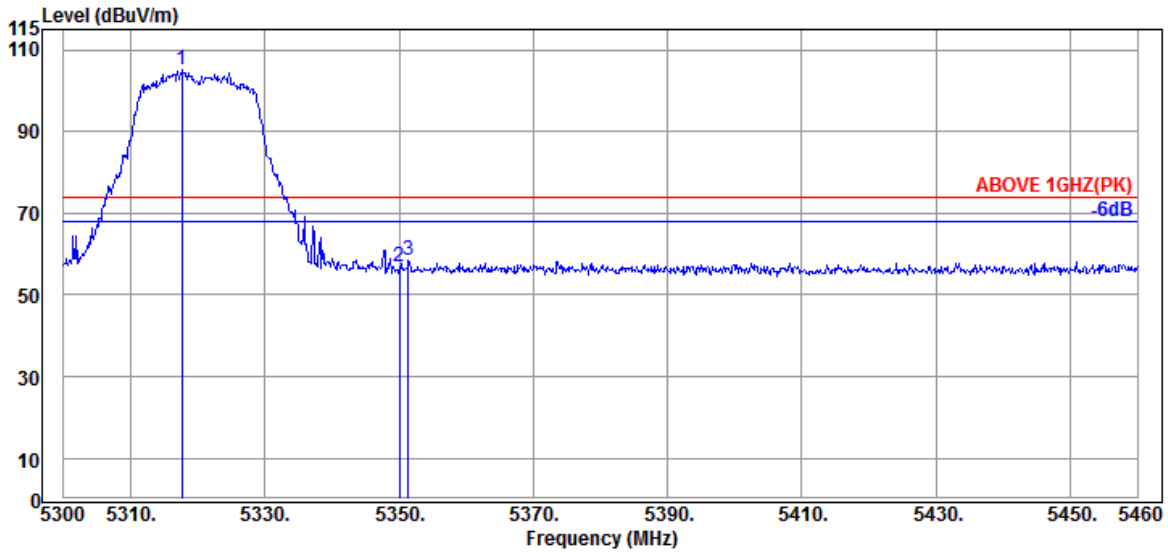

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.57	8.98	34.27	96.00	105.28	---	---	Peak
5350.080	34.90	8.99	34.26	47.41	57.04	74.00	16.96	Peak
5351.360	34.90	8.99	34.26	48.67	58.30	74.00	15.70	Peak

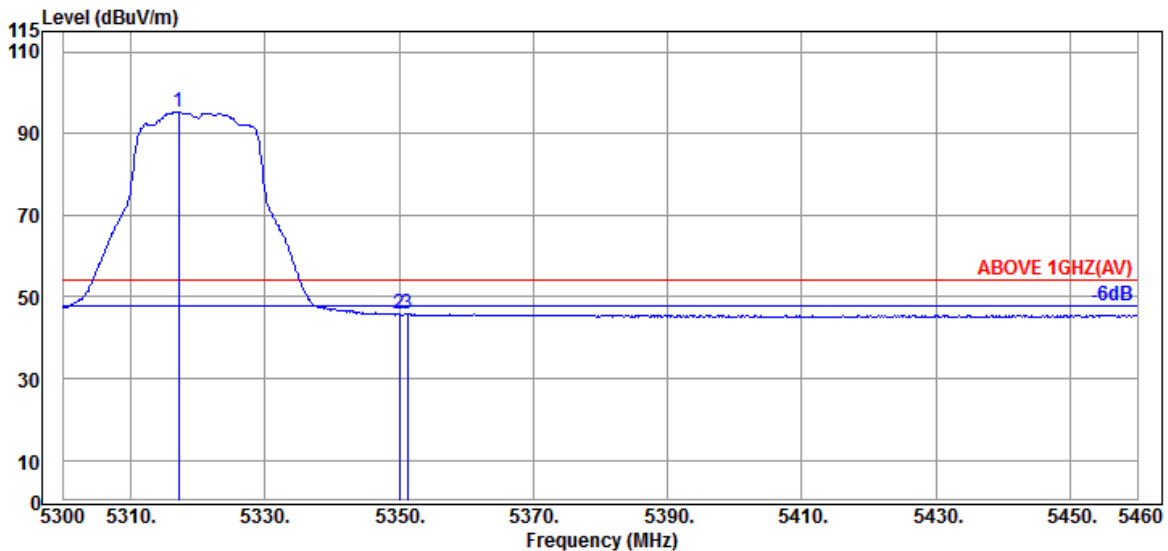


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.57	8.98	34.27	86.12	95.40	---	---	Average
5350.080	34.90	8.99	34.26	36.10	45.73	54.00	8.27	Average
5351.200	34.90	8.99	34.26	36.19	45.82	54.00	8.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

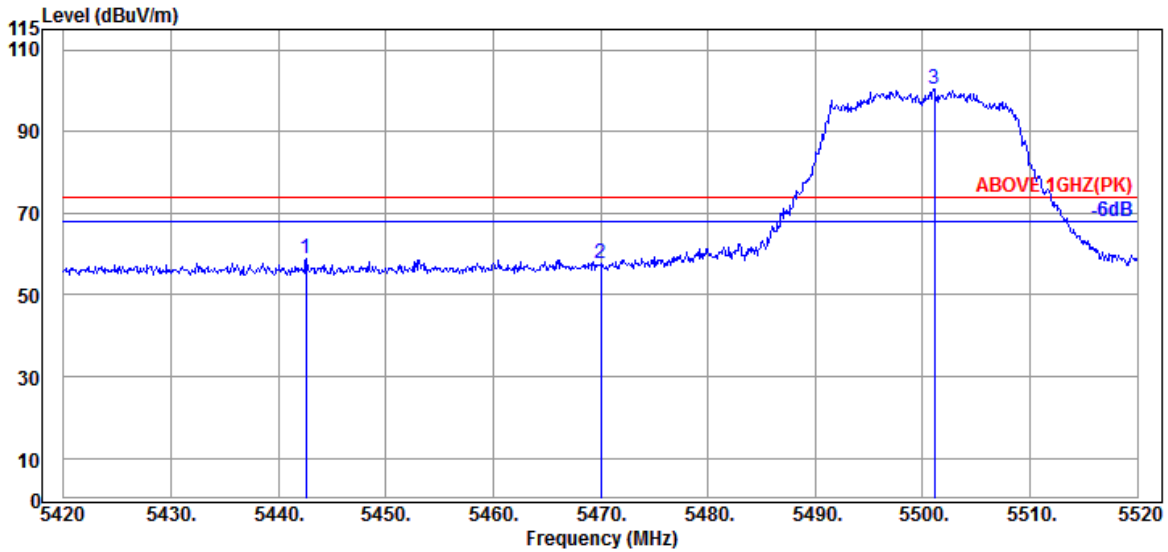

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.600	34.65	9.04	34.22	49.53	59.00	74.00	15.00	Peak
5470.000	34.63	9.06	34.21	48.28	57.76	74.00	16.24	Peak
@ 5501.100	34.70	9.08	34.20	90.84	100.42	---	---	Peak

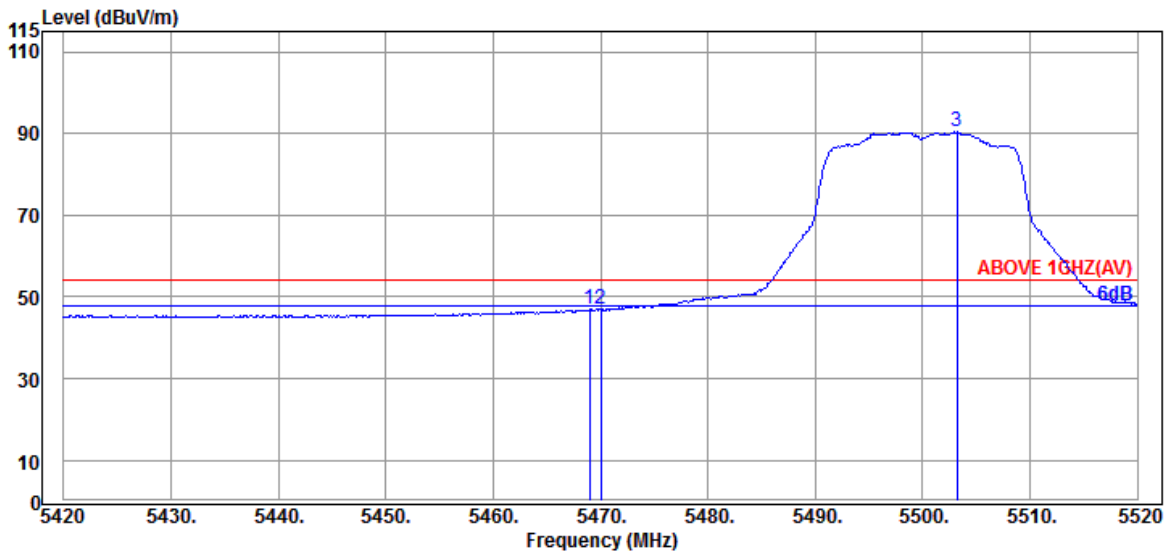


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.63	9.06	34.21	37.37	46.85	54.00	7.15	Average
5470.000	34.63	9.06	34.21	37.39	46.87	54.00	7.13	Average
@ 5503.200	34.70	9.08	34.20	80.77	90.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

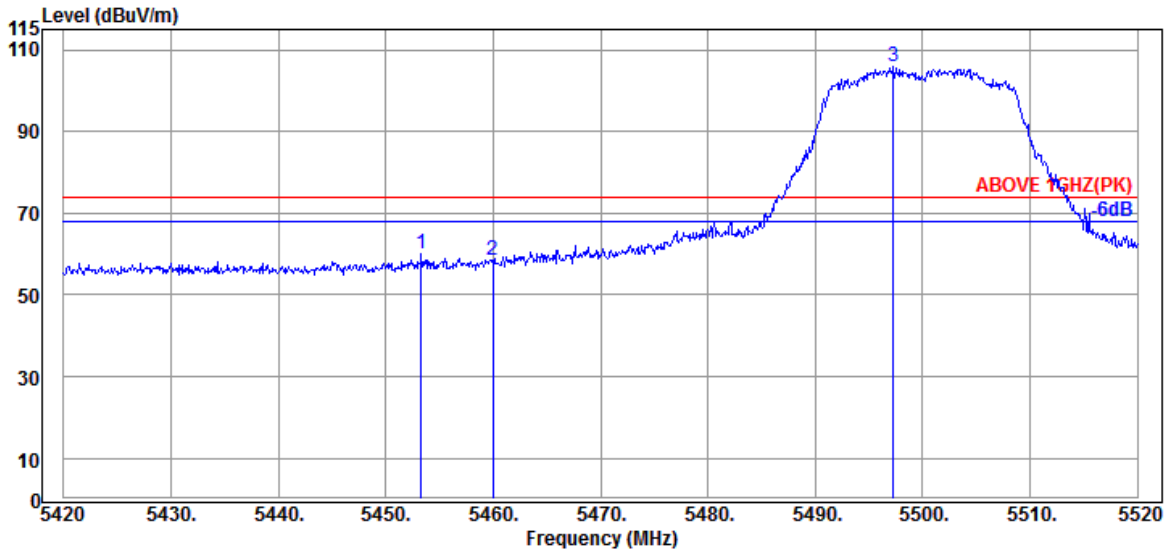

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.300	34.60	9.05	34.21	50.60	60.04	74.00	13.96	Peak
5460.000	34.60	9.05	34.21	48.93	58.37	74.00	15.63	Peak
@ 5497.300	34.70	9.08	34.20	96.19	105.77	---	---	Peak

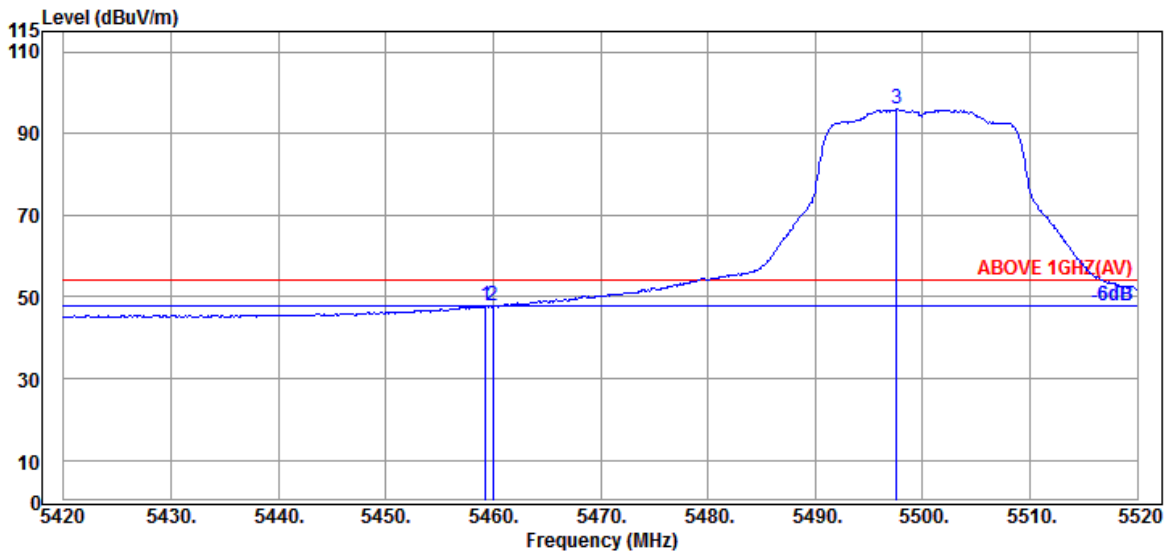


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.60	9.05	34.21	38.35	47.79	54.00	6.21	Average
5460.000	34.60	9.05	34.21	38.45	47.89	54.00	6.11	Average
@ 5497.600	34.70	9.08	34.20	86.35	95.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

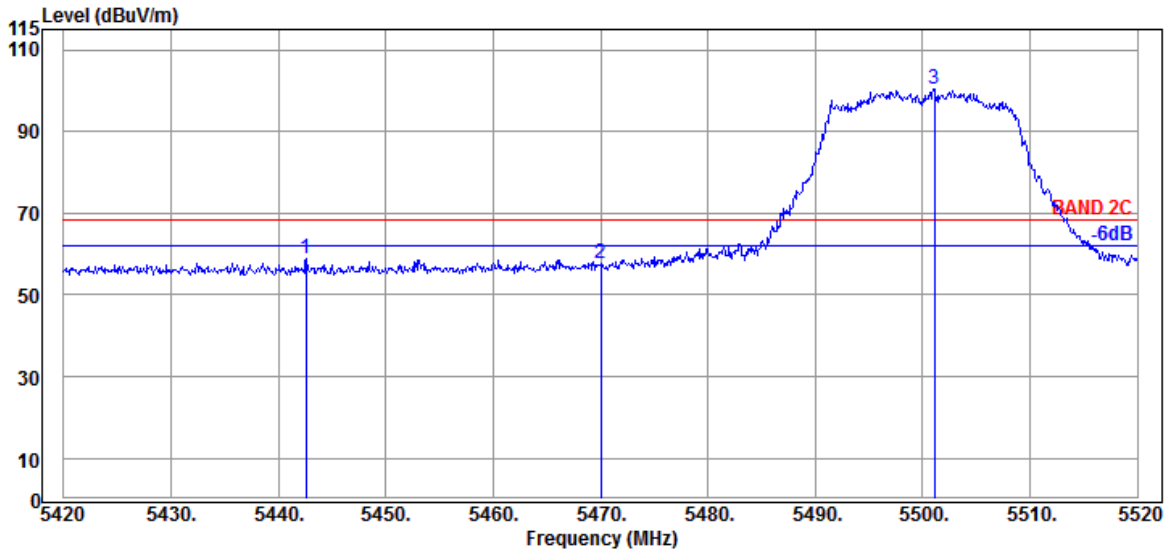

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.600	34.65	9.04	34.22	49.53	59.00	68.20	9.20	Peak
5470.000	34.63	9.06	34.21	48.28	57.76	68.20	10.44	Peak
@ 5501.100	34.70	9.08	34.20	90.84	100.42	---	---	Peak

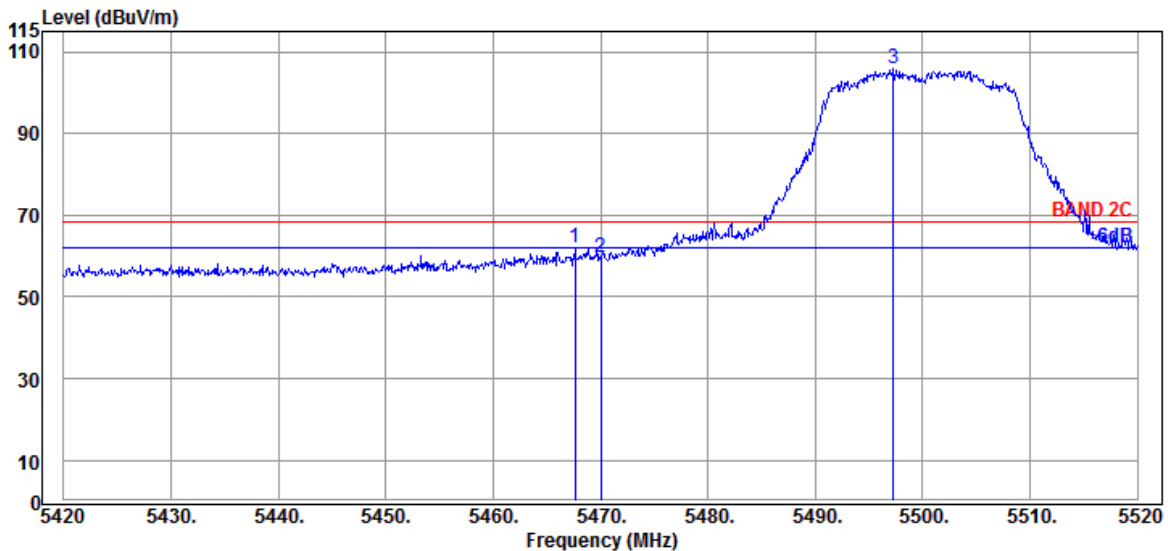


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.63	9.06	34.21	52.41	61.89	68.20	6.31	Peak
5470.000	34.63	9.06	34.21	50.16	59.64	68.20	8.56	Peak
@ 5497.300	34.70	9.08	34.20	96.19	105.77	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

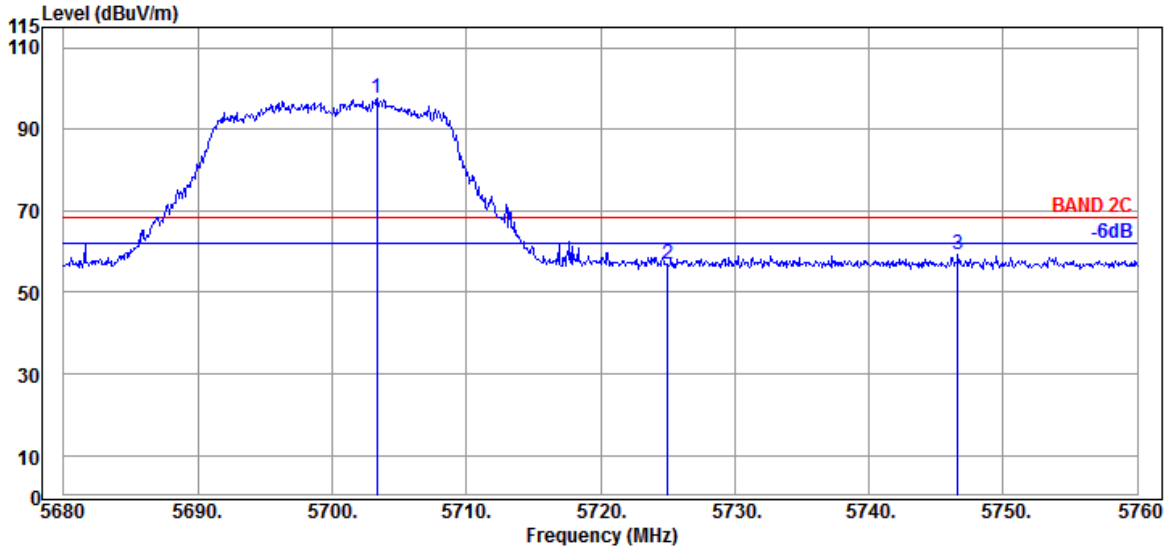

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.360	34.70	9.18	34.29	87.91	97.50	---	---	Peak
5725.040	34.90	9.20	34.30	47.02	56.82	68.20	11.38	Peak
5746.640	35.00	9.20	34.32	49.35	59.23	68.20	8.97	Peak

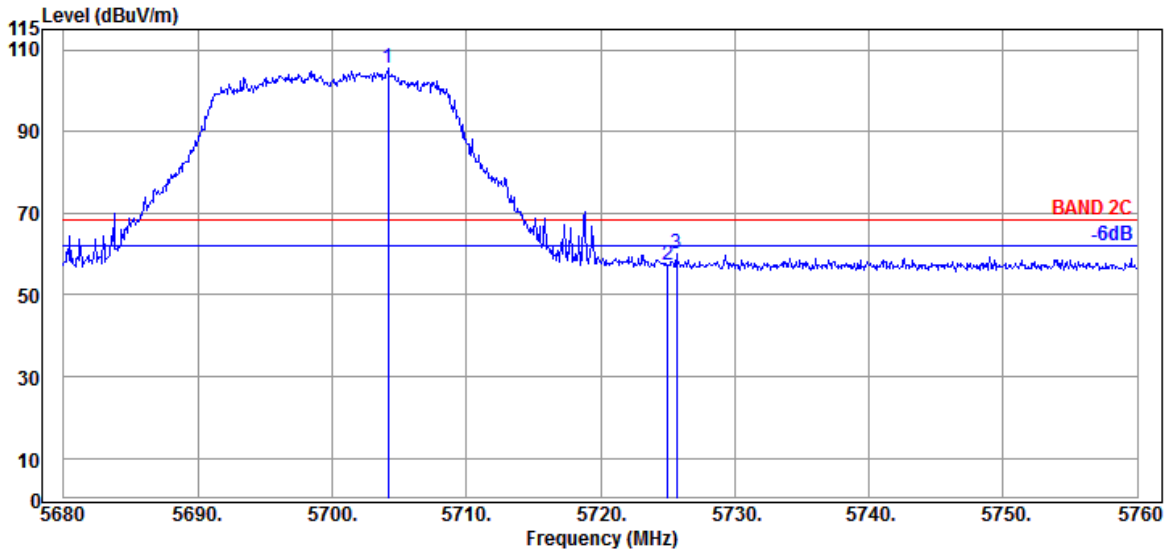


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.160	34.70	9.18	34.29	95.76	105.35	---	---	Peak
5725.040	34.90	9.20	34.30	47.31	57.11	68.20	11.09	Peak
5725.680	34.90	9.20	34.30	50.45	60.25	68.20	7.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

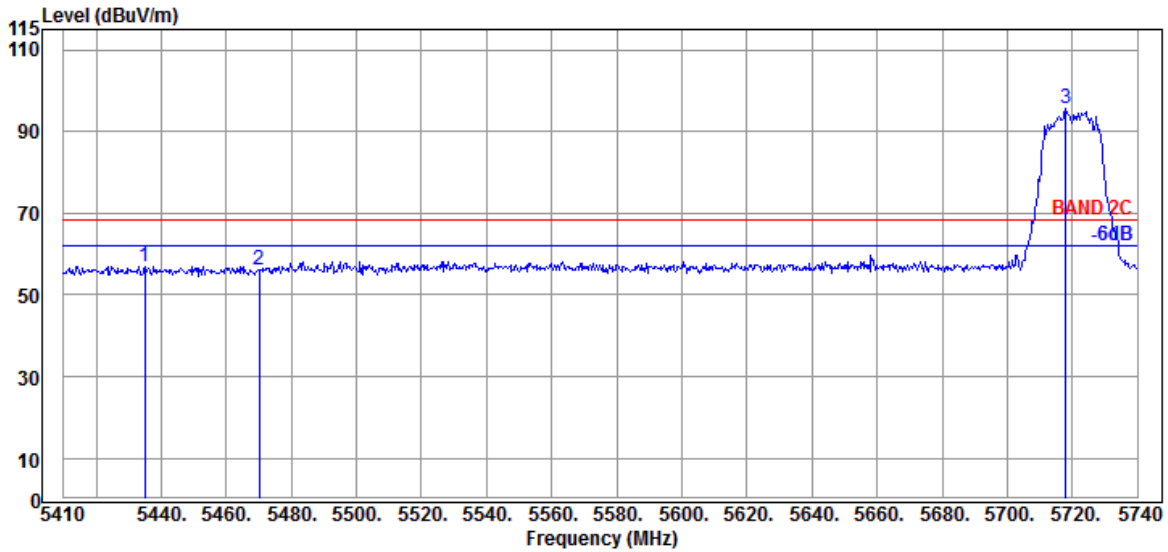

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5435.080	34.65	9.04	34.22	47.62	57.09	68.20	11.11	Peak
	5470.060	34.63	9.06	34.21	46.70	56.18	68.20	12.02	Peak
	5717.890	34.80	9.19	34.30	85.79	95.48	---	---	Peak

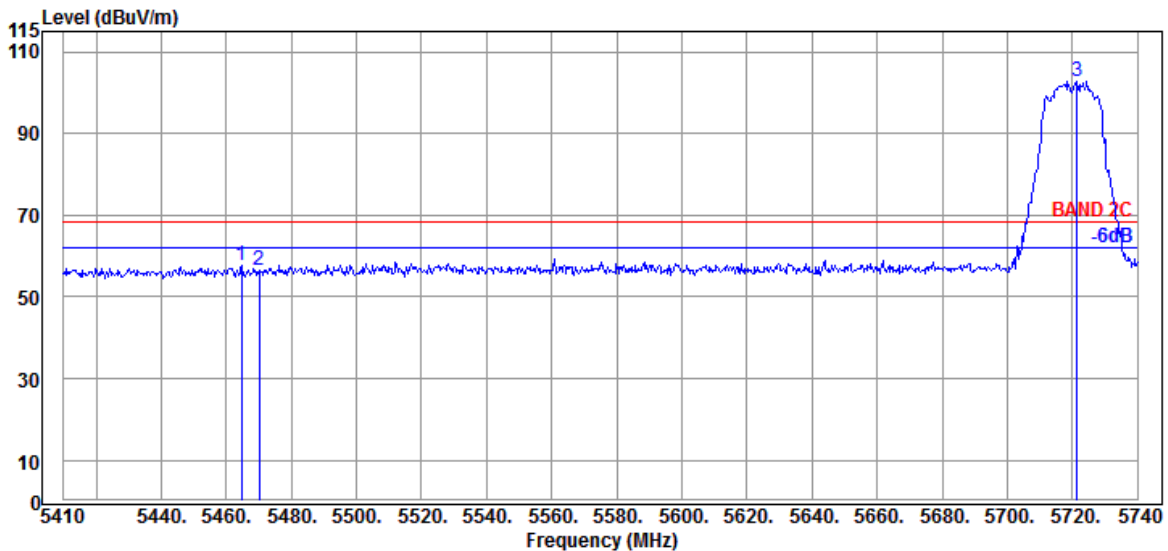


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5464.780	34.63	9.06	34.21	48.20	57.68	68.20	10.52	Peak
	5470.060	34.63	9.06	34.21	47.07	56.55	68.20	11.65	Peak
	5721.520	34.80	9.19	34.30	93.11	102.80	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

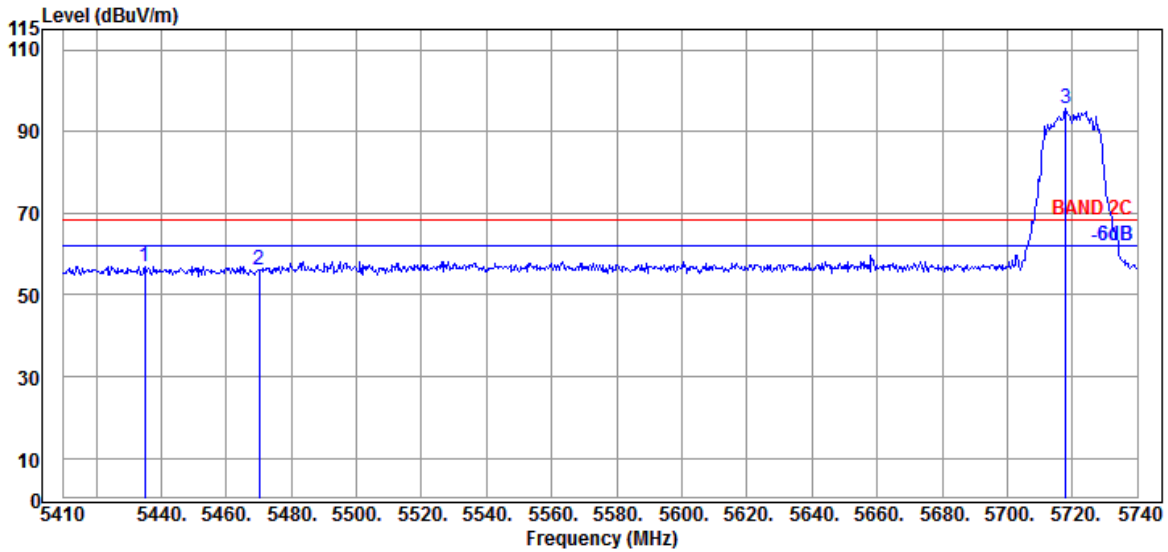

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5435.080	34.65	9.04	34.22	47.62	57.09	68.20	11.11	Peak
5470.060	34.63	9.06	34.21	46.70	56.18	68.20	12.02	Peak
5717.890	34.80	9.19	34.30	85.79	95.48	---	---	Peak

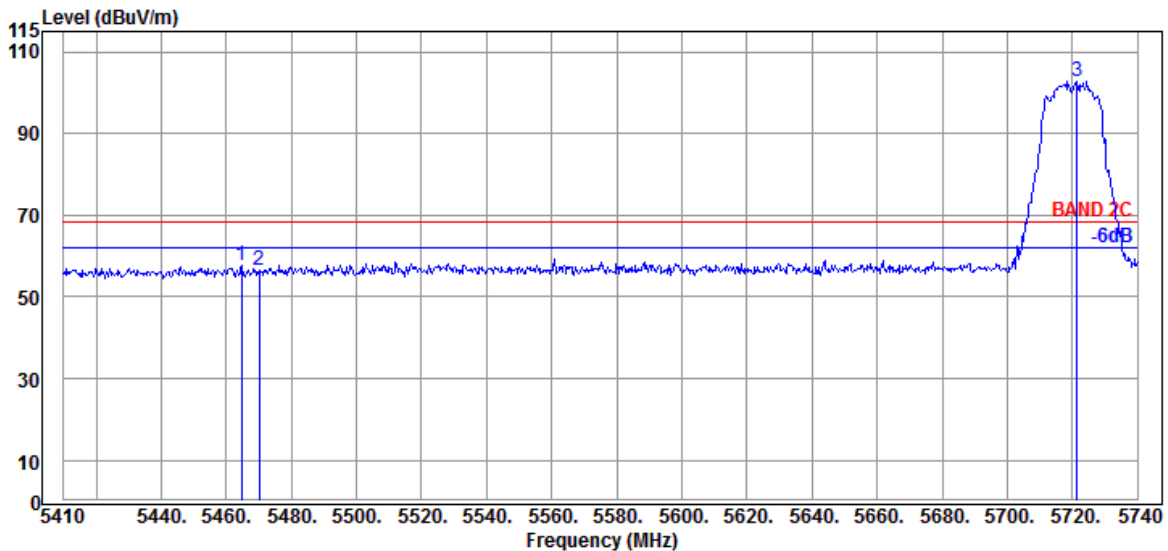


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5464.780	34.63	9.06	34.21	48.20	57.68	68.20	10.52	Peak
5470.060	34.63	9.06	34.21	47.07	56.55	68.20	11.65	Peak
5721.520	34.80	9.19	34.30	93.11	102.80	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

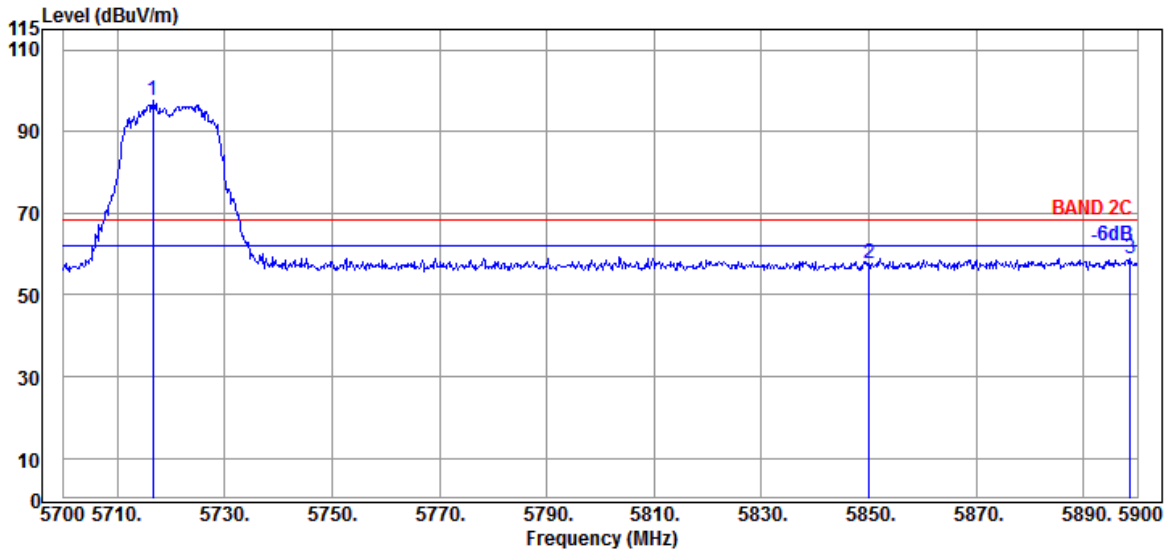

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5716.600	34.80	9.19	34.30	87.94	97.63	---	---	Peak
5850.000	35.40	9.25	34.36	47.37	57.66	68.20	10.54	Peak
@ 5898.600	35.80	9.28	34.39	48.28	58.97	68.20	9.23	Peak

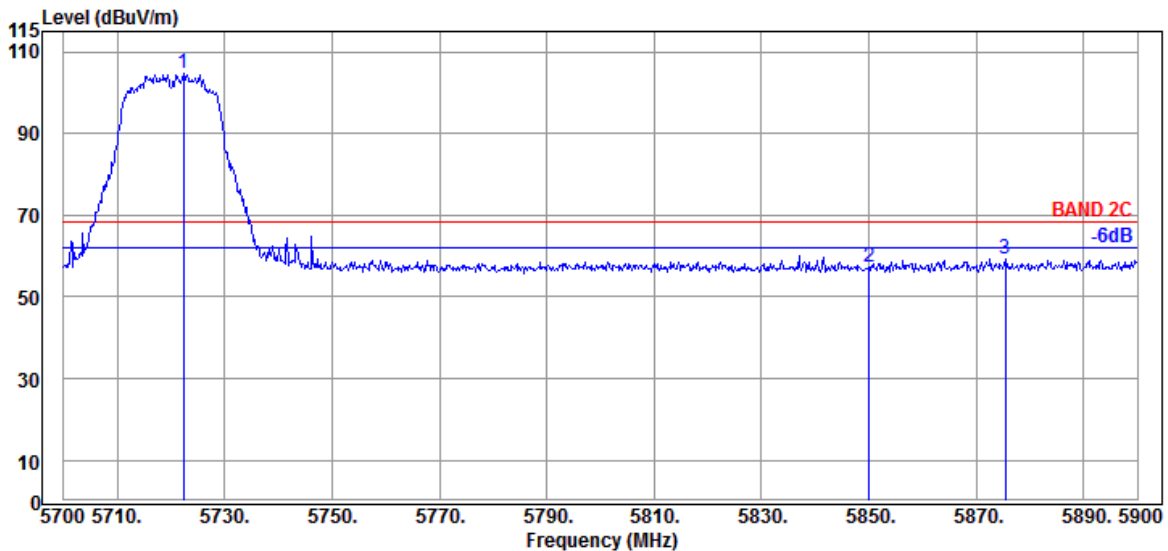


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5722.400	34.90	9.20	34.30	95.02	104.82	---	---	Peak
5850.000	35.40	9.25	34.36	46.91	57.20	68.20	11.00	Peak
@ 5875.400	35.67	9.27	34.37	48.76	59.33	68.20	8.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

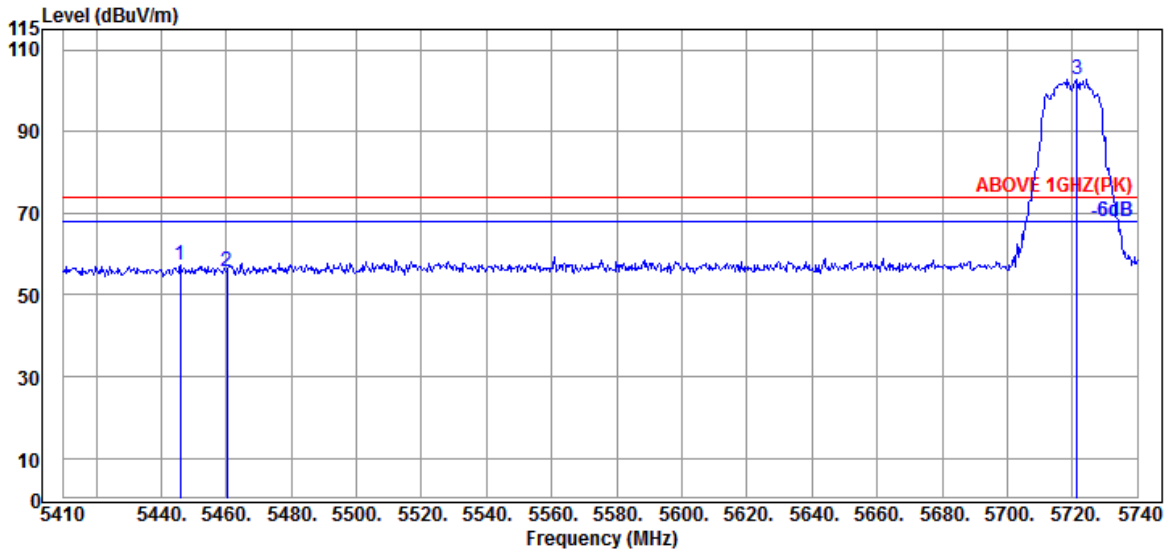

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.970	34.65	9.04	34.22	47.69	57.16	74.00	16.84	Peak
5460.160	34.60	9.05	34.21	46.41	55.85	74.00	18.15	Peak
@ 5721.520	34.80	9.19	34.30	93.11	102.80	---	---	Peak

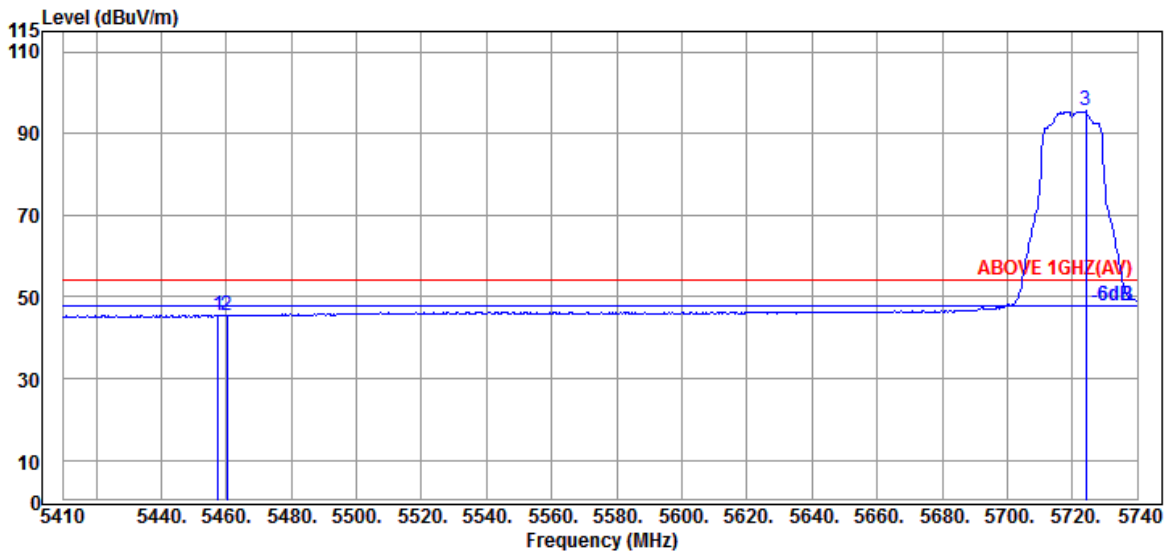


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.520	34.60	9.05	34.21	36.05	45.49	54.00	8.51	Average
5460.160	34.60	9.05	34.21	36.07	45.51	54.00	8.49	Average
@ 5724.160	34.90	9.20	34.30	85.68	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

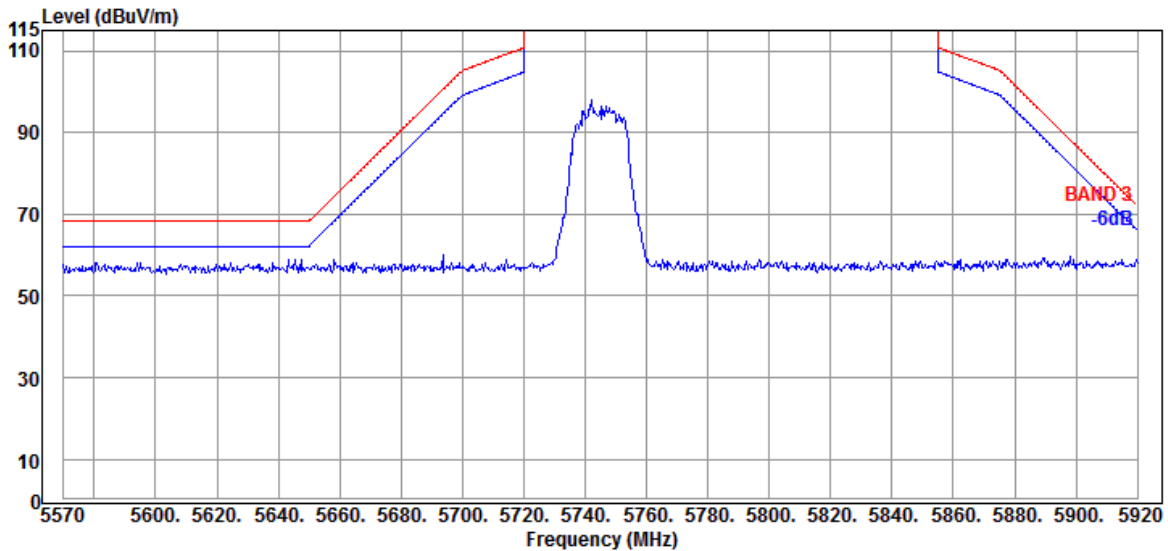


Antenna at Vertical Polarization

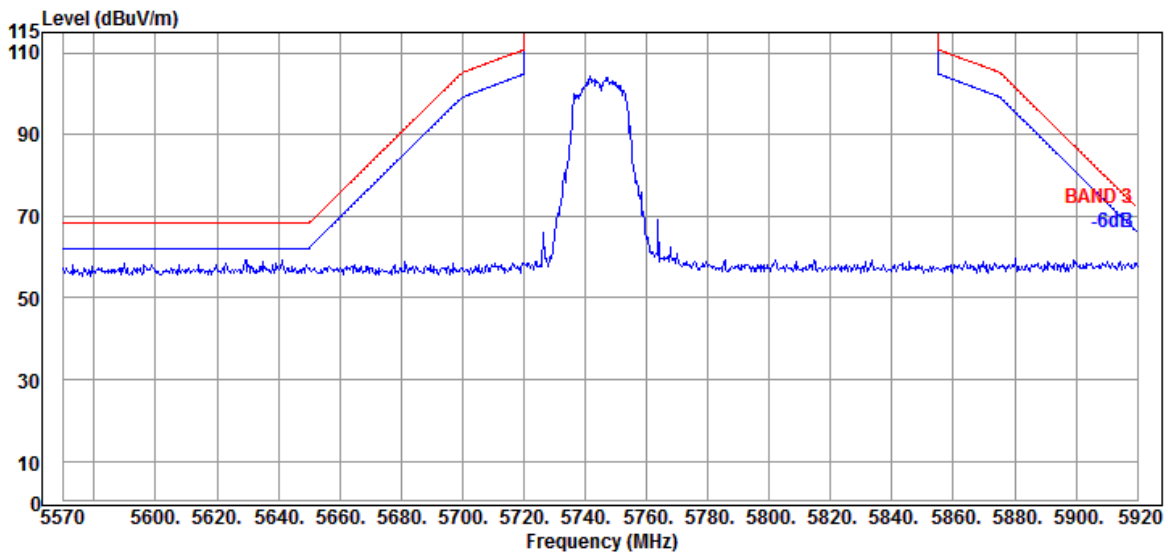

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

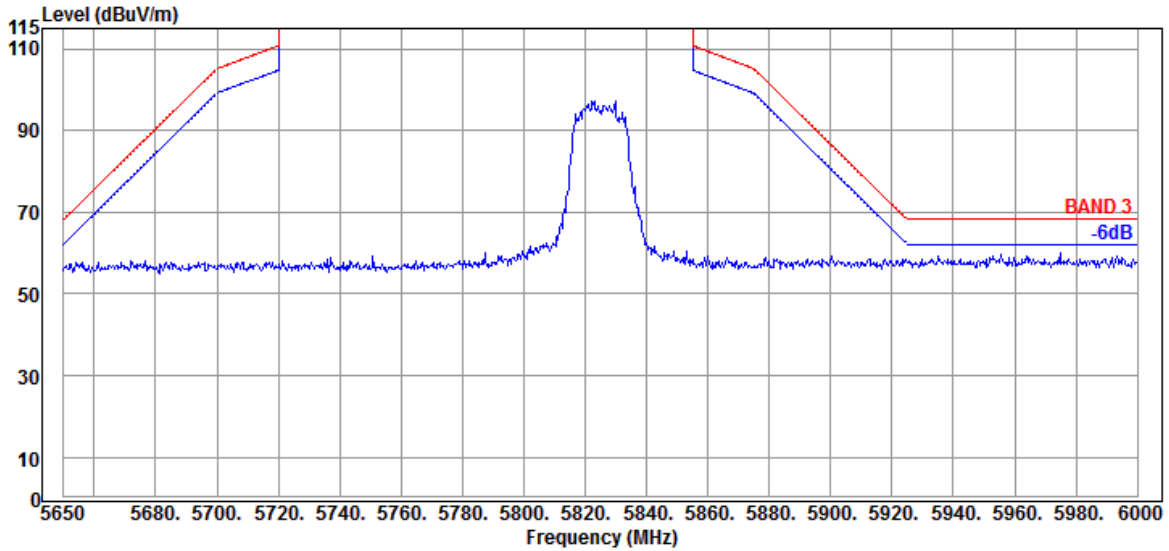

Antenna at Vertical Polarization

