



Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

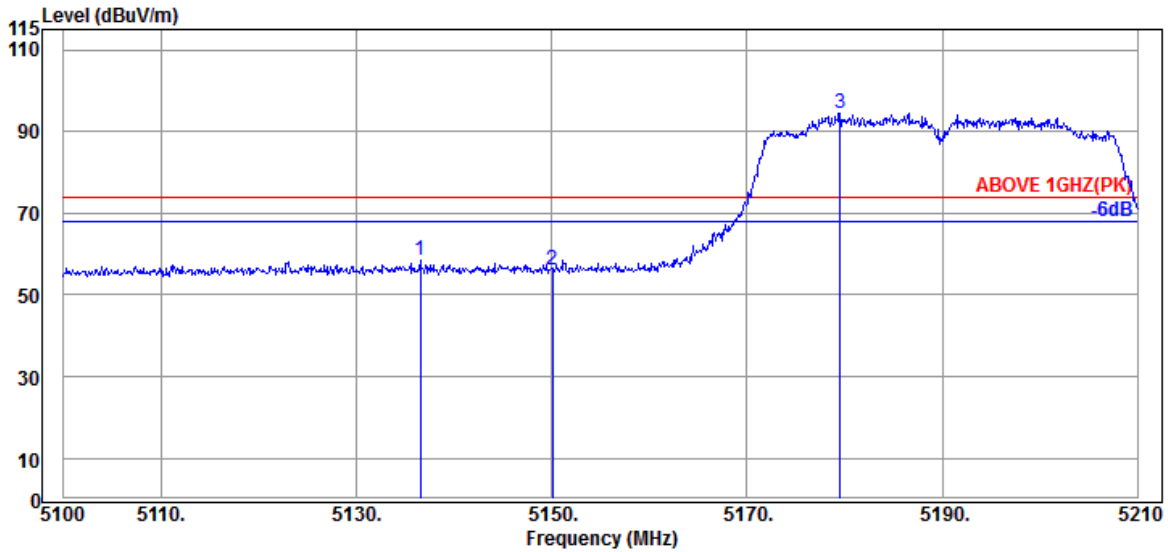

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.520	34.40	8.88	34.34	49.50	58.44	74.00	15.56	Peak
5150.050	34.50	8.88	34.34	47.18	56.22	74.00	17.78	Peak
@ 5179.530	34.63	8.90	34.32	85.35	94.56	---	---	Peak

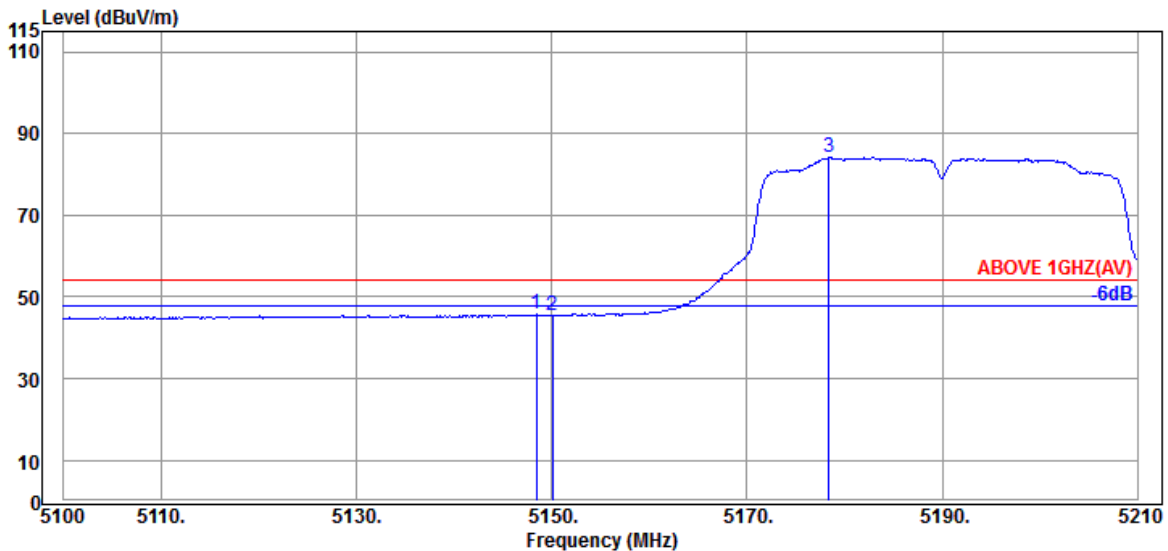


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Average
5150.050	34.50	8.88	34.34	36.26	45.30	54.00	8.70	Average
@ 5178.430	34.63	8.90	34.32	74.89	84.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

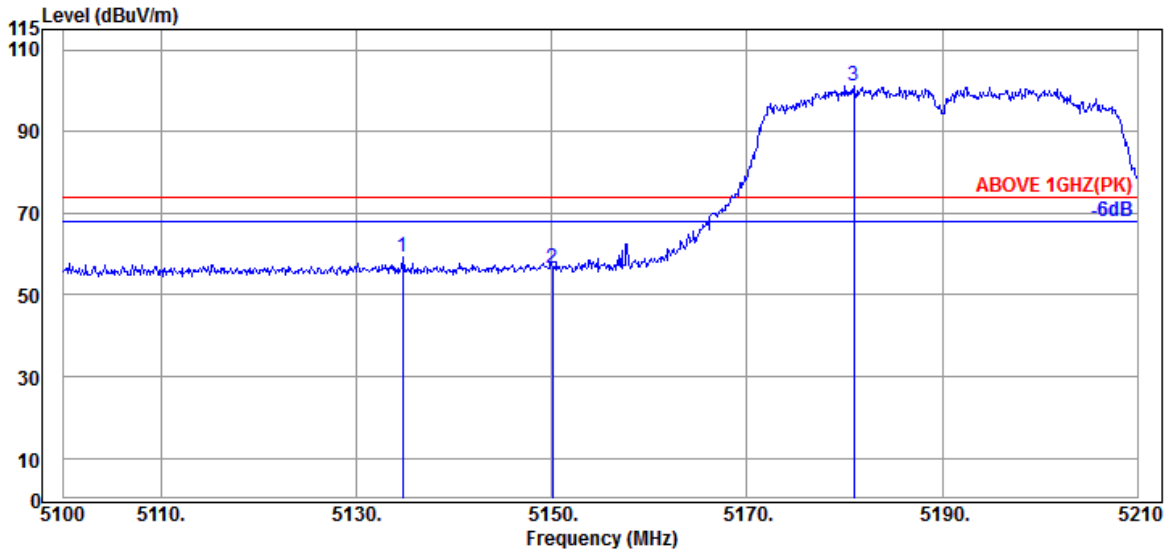

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.760	34.40	8.88	34.34	50.18	59.12	74.00	14.88	Peak
5150.050	34.50	8.88	34.34	47.42	56.46	74.00	17.54	Peak
@ 5180.960	34.63	8.90	34.32	91.85	101.06	---	---	Peak

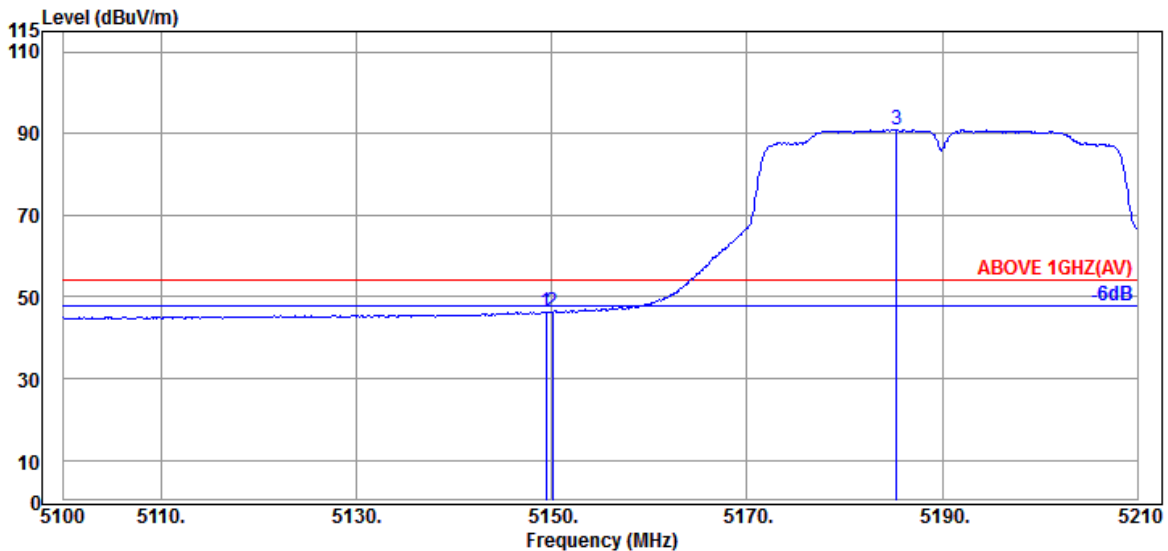


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.50	8.88	34.34	37.24	46.28	54.00	7.72	Average
5150.050	34.50	8.88	34.34	37.29	46.33	54.00	7.67	Average
@ 5185.360	34.63	8.90	34.32	81.72	90.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

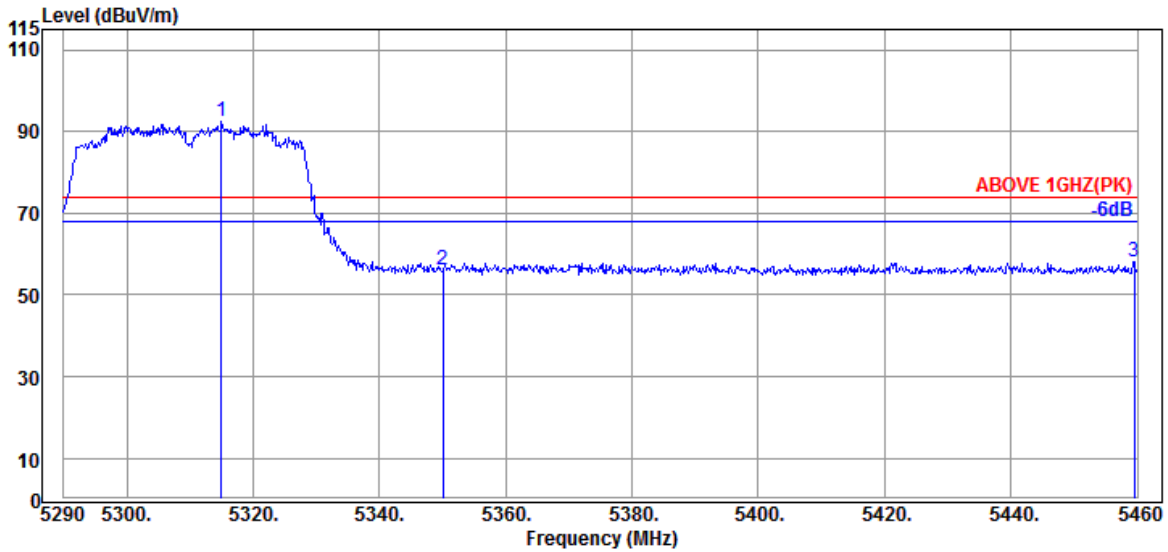

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.990	34.57	8.98	34.27	83.12	92.40	---	---	Peak
5350.010	34.90	8.99	34.26	46.31	55.94	74.00	18.06	Peak
5459.490	34.60	9.05	34.21	48.78	58.22	74.00	15.78	Peak

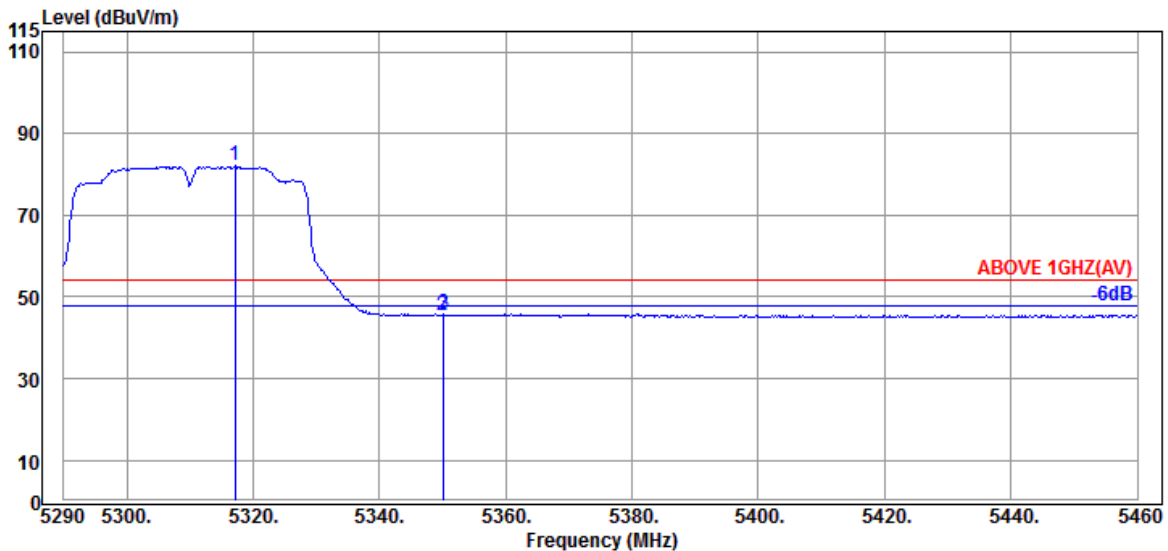


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.57	8.98	34.27	72.74	82.02	---	---	Average
5350.010	34.90	8.99	34.26	35.80	45.43	54.00	8.57	Average
5350.180	34.90	8.99	34.26	36.11	45.74	54.00	8.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

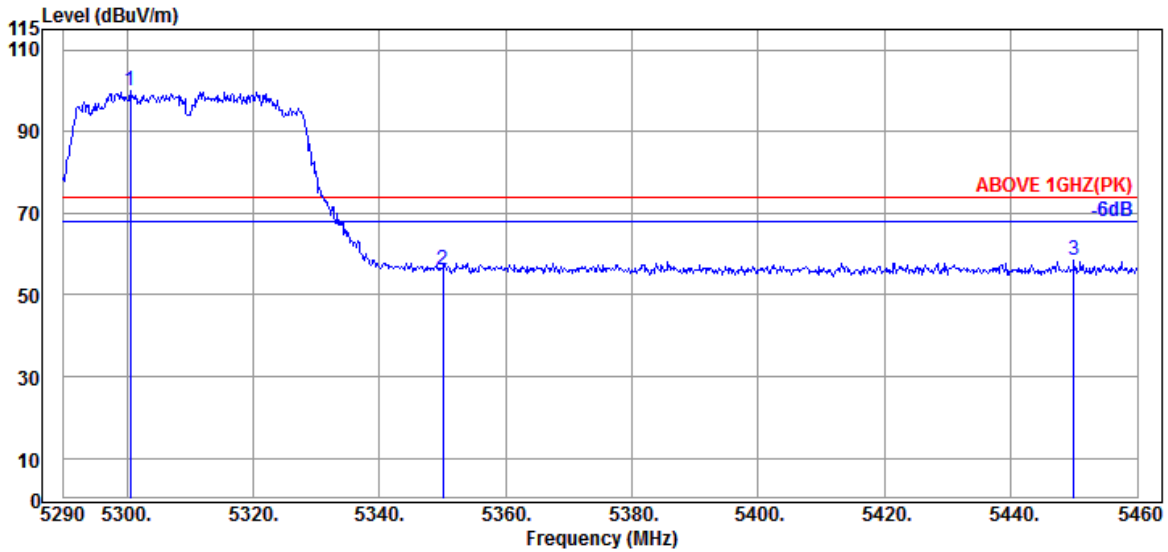

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.540	34.40	8.97	34.28	90.93	100.02	---	---	Peak
5350.010	34.90	8.99	34.26	46.46	56.09	74.00	17.91	Peak
5449.970	34.60	9.05	34.22	48.93	58.36	74.00	15.64	Peak

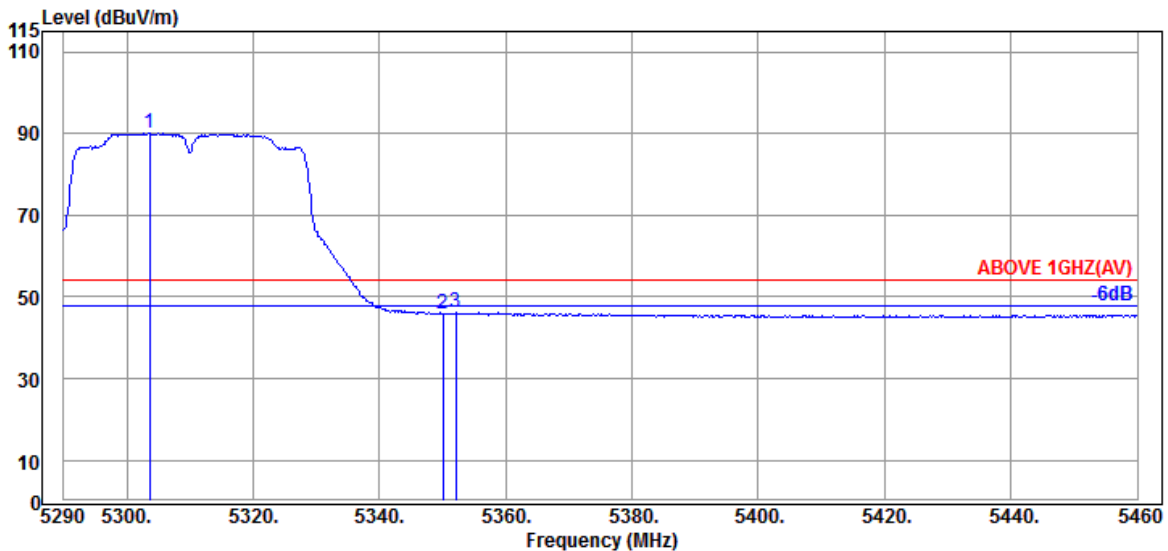


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.40	8.97	34.28	81.08	90.17	---	---	Average
5350.010	34.90	8.99	34.26	36.38	46.01	54.00	7.99	Average
5352.050	34.90	8.99	34.26	36.49	46.12	54.00	7.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

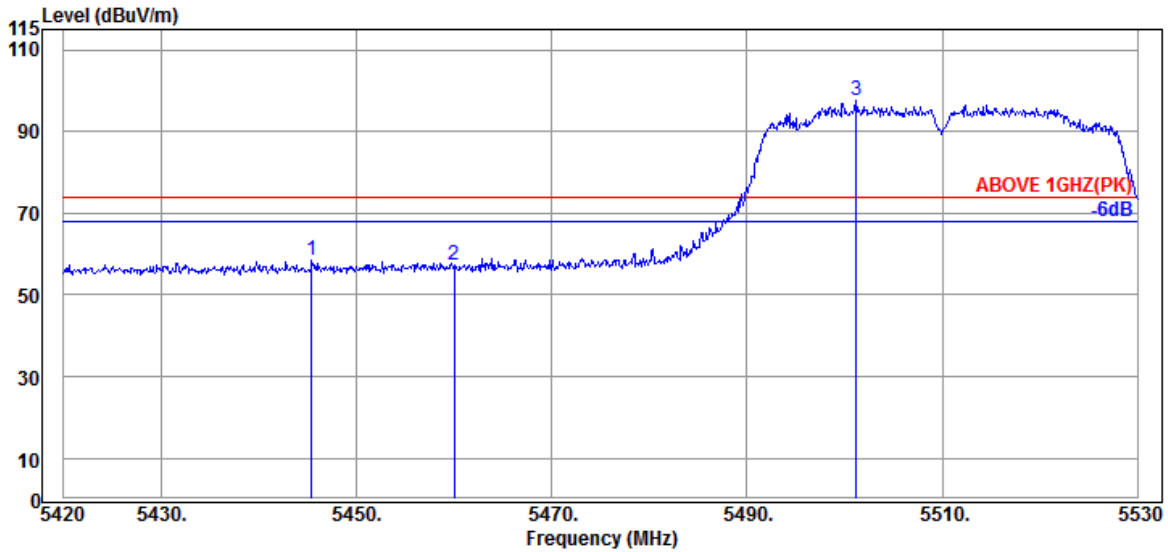

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.410	34.65	9.04	34.22	48.86	58.33	74.00	15.67	Peak
5460.040	34.60	9.05	34.21	47.96	57.40	74.00	16.60	Peak
@ 5501.180	34.70	9.08	34.20	87.99	97.57	---	---	Peak

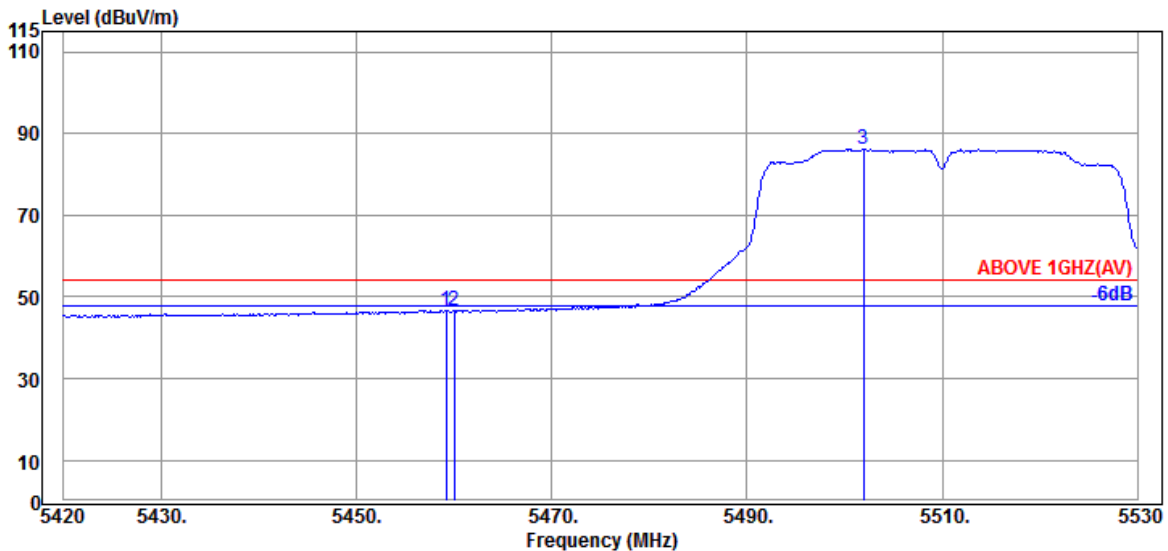


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.160	34.60	9.05	34.21	37.29	46.73	54.00	7.27	Average
5460.040	34.60	9.05	34.21	37.20	46.64	54.00	7.36	Average
@ 5501.950	34.70	9.08	34.20	76.55	86.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

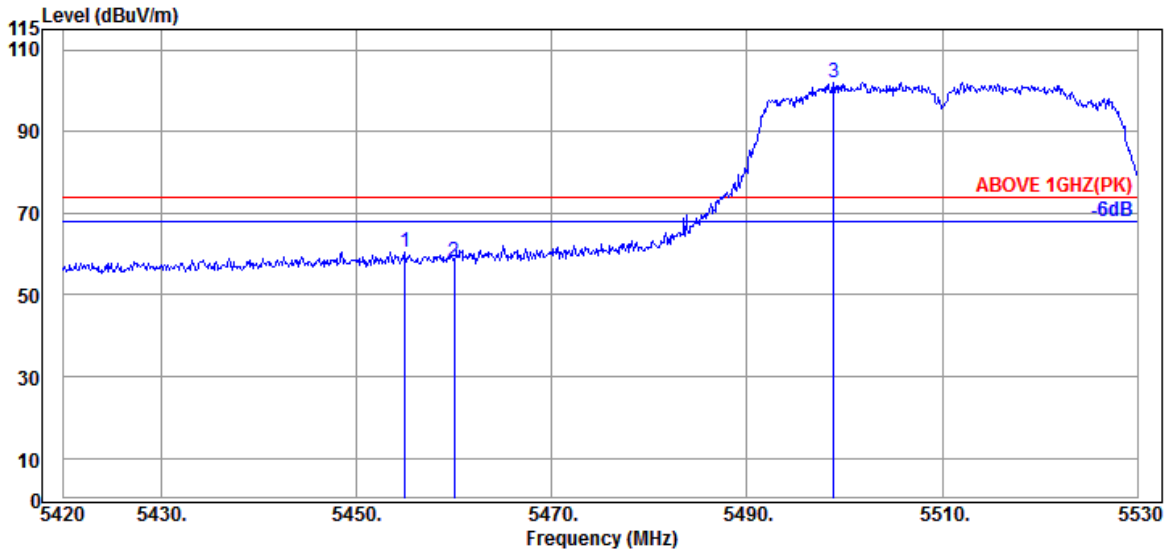

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.980	34.60	9.05	34.21	50.96	60.40	74.00	13.60	Peak
5460.040	34.60	9.05	34.21	48.79	58.23	74.00	15.77	Peak
@ 5498.870	34.70	9.08	34.20	92.32	101.90	---	---	Peak

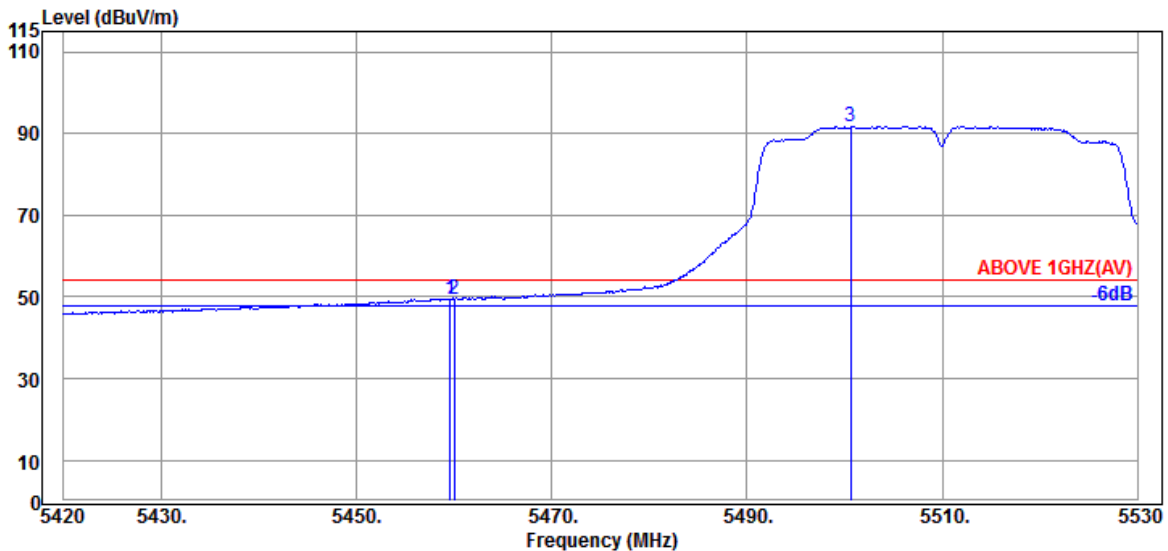


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.60	9.05	34.21	40.10	49.54	54.00	4.46	Average
5460.630	34.60	9.05	34.21	40.06	49.50	54.00	4.50	Average
@ 5500.630	34.70	9.08	34.20	82.17	91.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

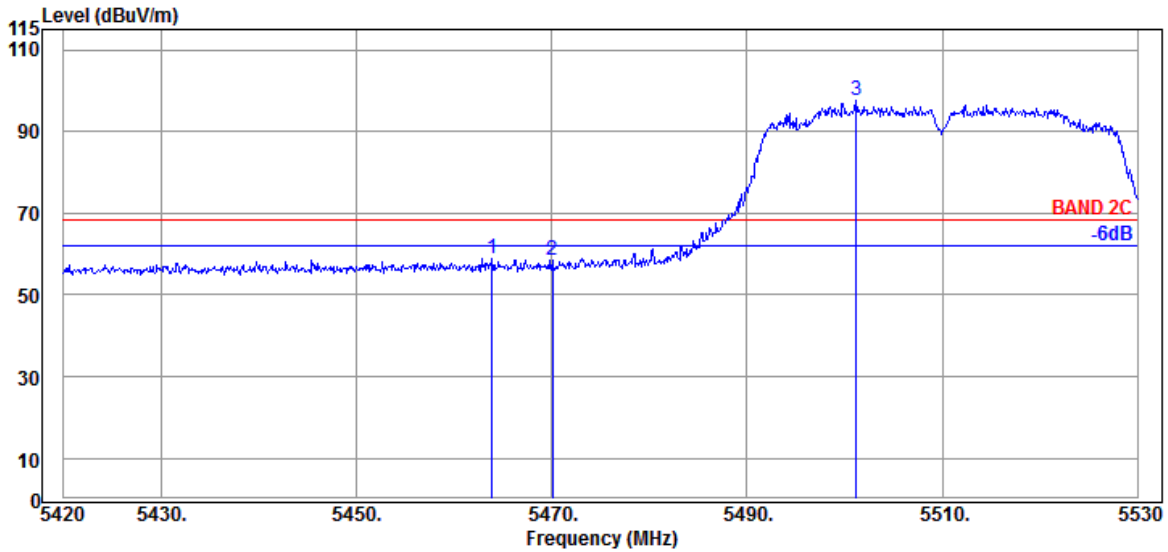

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.890	34.63	9.06	34.21	49.36	58.84	68.20	9.36	Peak
5470.050	34.63	9.06	34.21	49.00	58.48	68.20	9.72	Peak
@ 5501.180	34.70	9.08	34.20	87.99	97.57	---	---	Peak

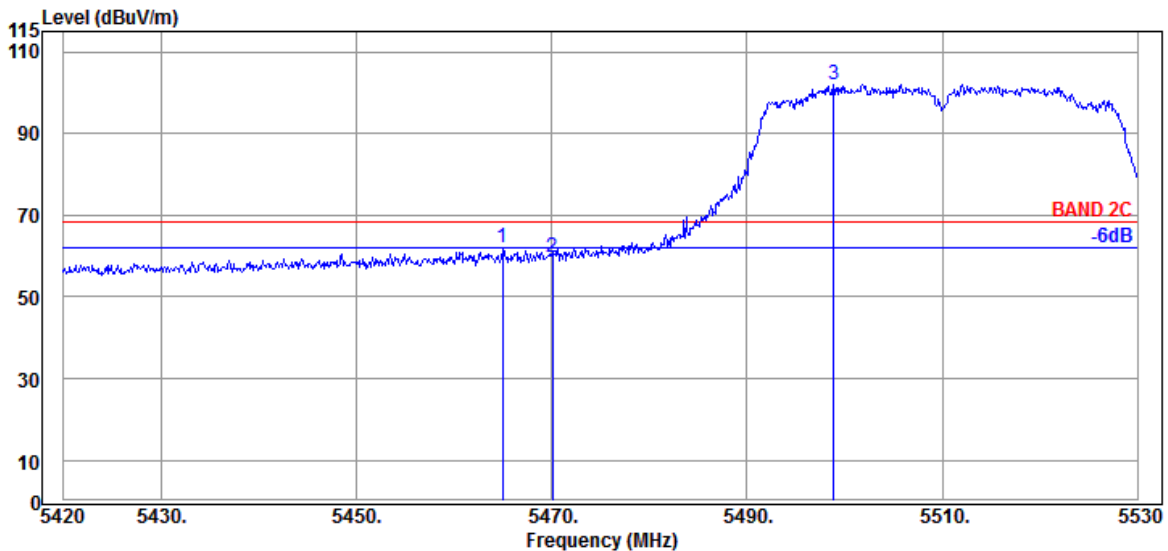


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.990	34.63	9.06	34.21	52.40	61.88	68.20	6.32	Peak
5470.050	34.63	9.06	34.21	50.27	59.75	68.20	8.45	Peak
@ 5498.870	34.70	9.08	34.20	92.32	101.90	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

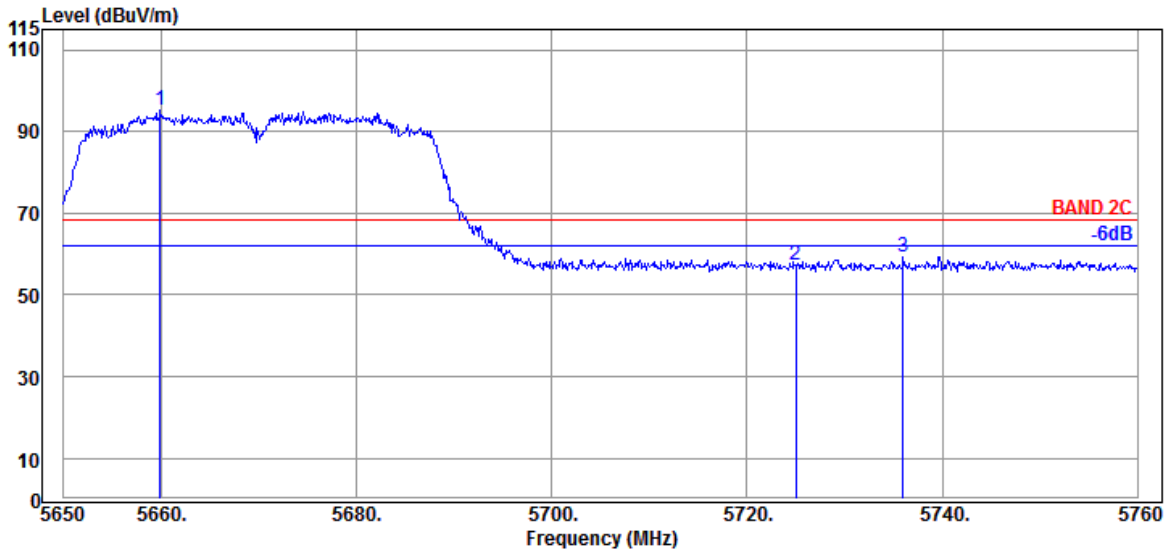

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.900	34.57	9.16	34.28	85.64	95.09	---	---	Peak
5725.020	34.90	9.20	34.30	47.70	57.50	68.20	10.70	Peak
5736.020	34.90	9.20	34.31	49.63	59.42	68.20	8.78	Peak

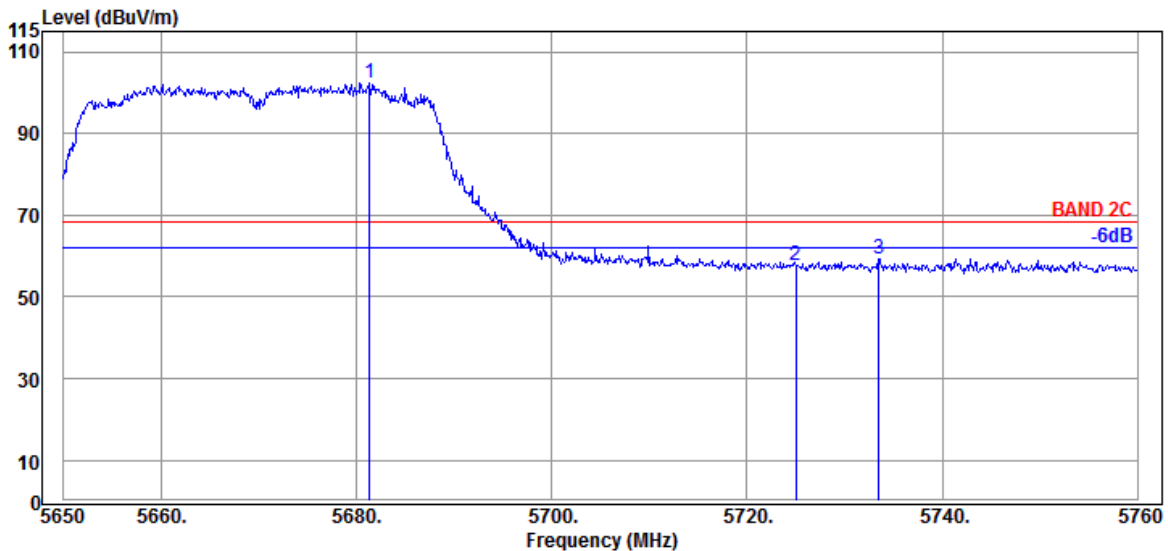


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.350	34.63	9.17	34.29	92.88	102.39	---	---	Peak
5725.020	34.90	9.20	34.30	47.97	57.77	68.20	10.43	Peak
5733.490	34.90	9.20	34.31	49.51	59.30	68.20	8.90	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

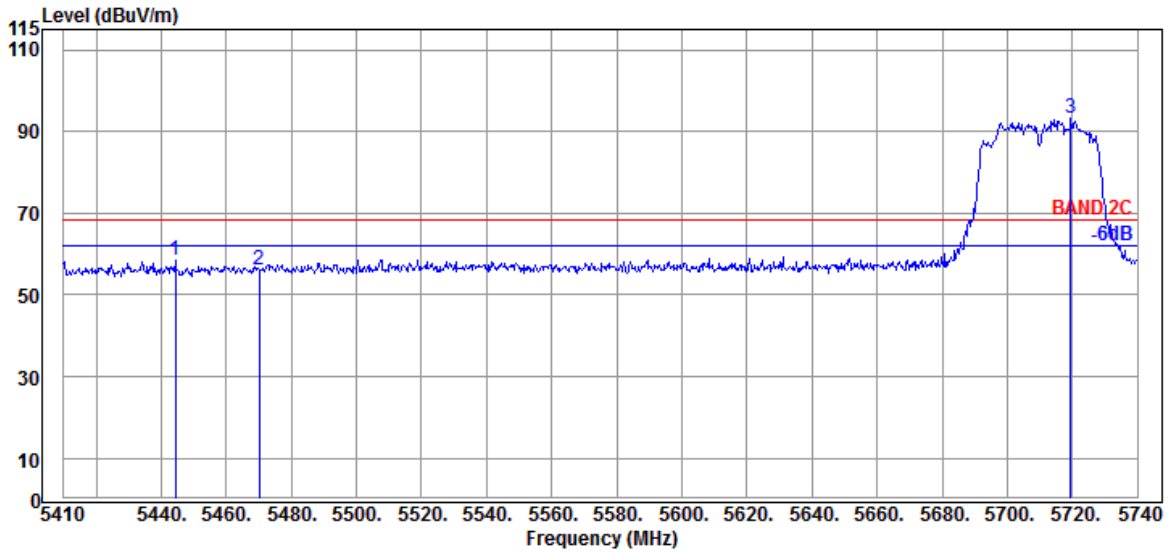

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5444.320	34.65	9.04	34.22	48.90	58.37	68.20	9.83	Peak
5470.060	34.63	9.06	34.21	46.58	56.06	68.20	12.14	Peak
5719.540	34.80	9.19	34.30	83.58	93.27	---	---	Peak

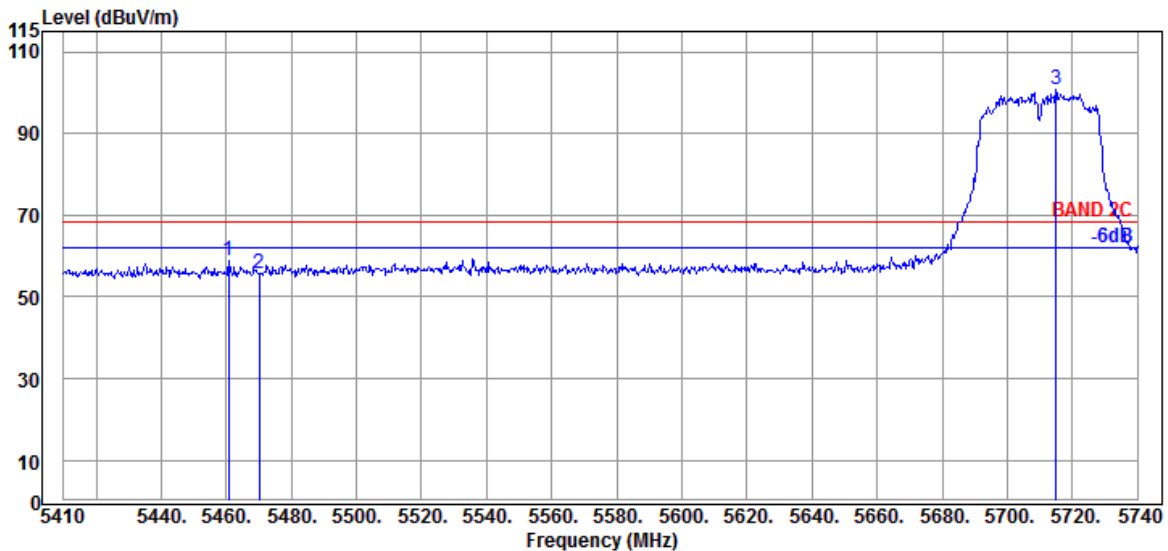


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5460.820	34.60	9.05	34.21	49.25	58.69	68.20	9.51	Peak
5470.060	34.63	9.06	34.21	46.37	55.85	68.20	12.35	Peak
5714.920	34.80	9.19	34.30	91.04	100.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

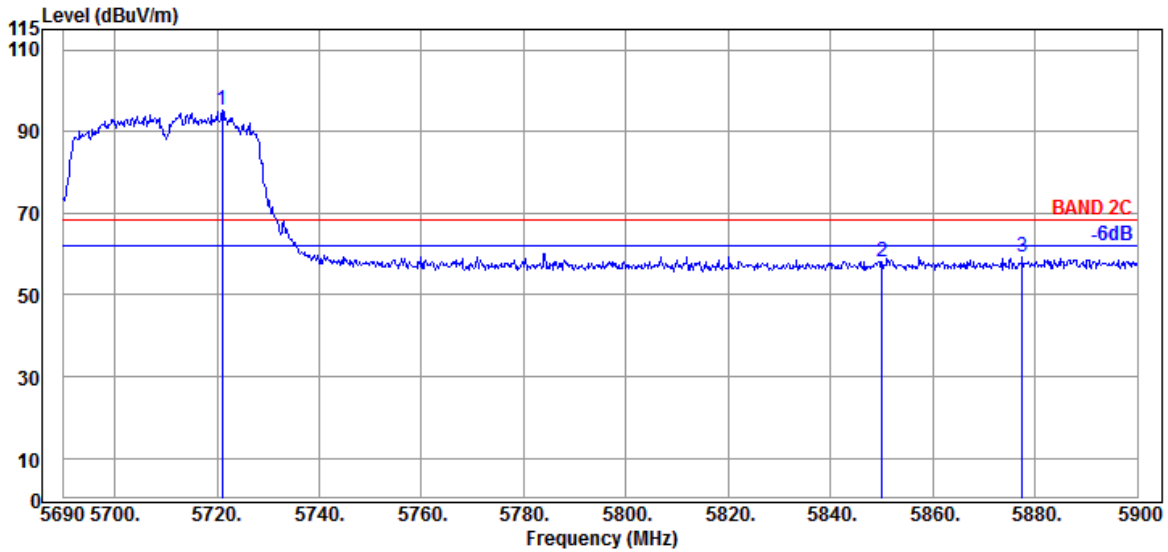

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.080	34.80	9.19	34.30	85.61	95.30	---	---	Peak
5850.020	35.40	9.25	34.36	47.76	58.05	68.20	10.15	Peak
5877.530	35.67	9.27	34.37	48.63	59.20	68.20	9.00	Peak

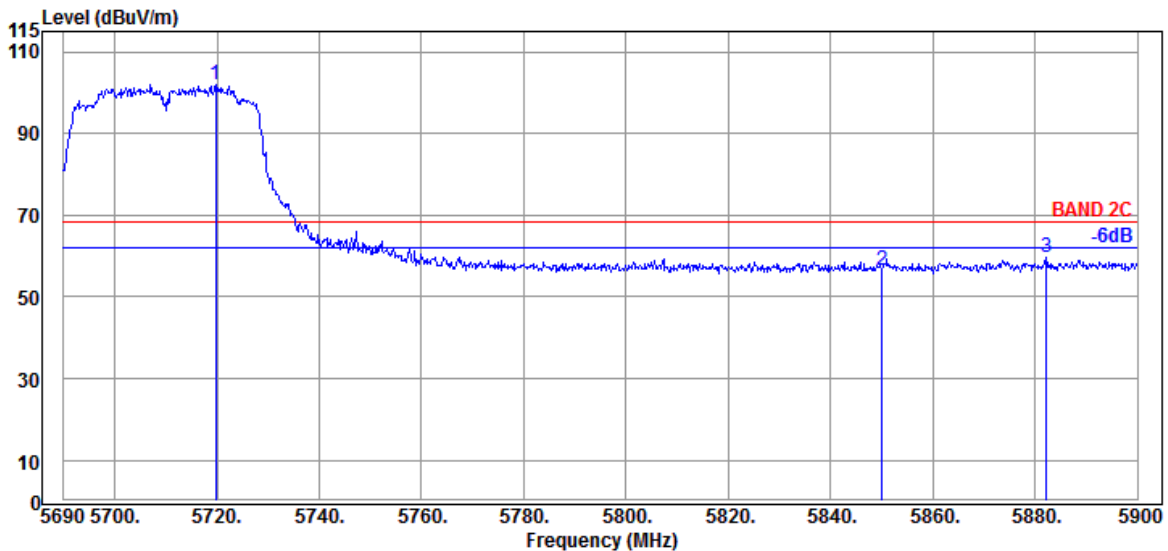


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.820	34.80	9.19	34.30	92.17	101.86	---	---	Peak
5850.020	35.40	9.25	34.36	46.34	56.63	68.20	11.57	Peak
5882.150	35.67	9.27	34.38	48.93	59.49	68.20	8.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

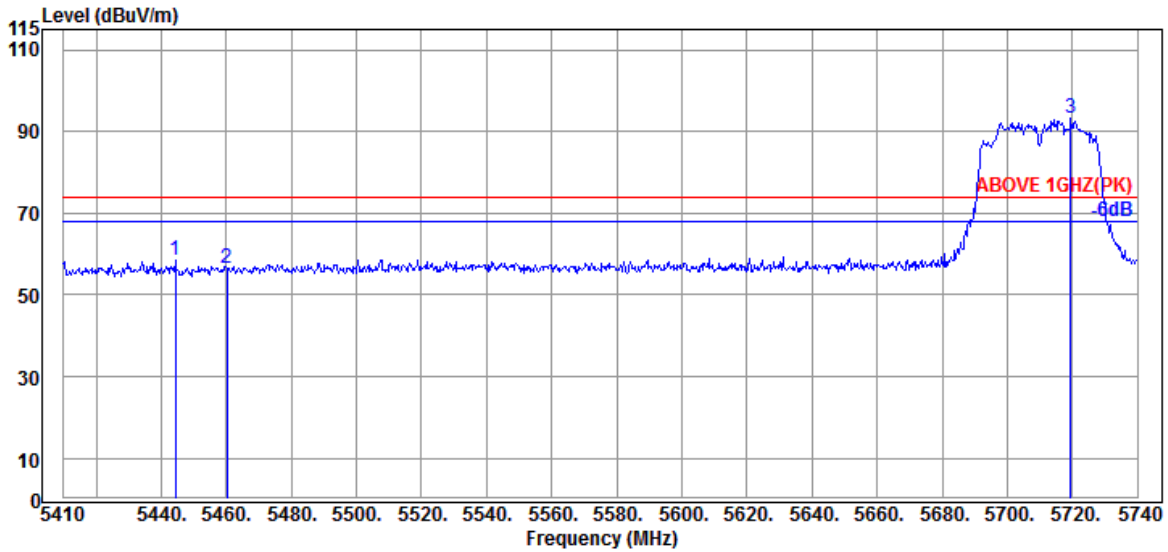

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.320	34.65	9.04	34.22	48.90	58.37	74.00	15.63	Peak
5460.160	34.60	9.05	34.21	47.01	56.45	74.00	17.55	Peak
@ 5719.540	34.80	9.19	34.30	83.58	93.27	---	---	Peak

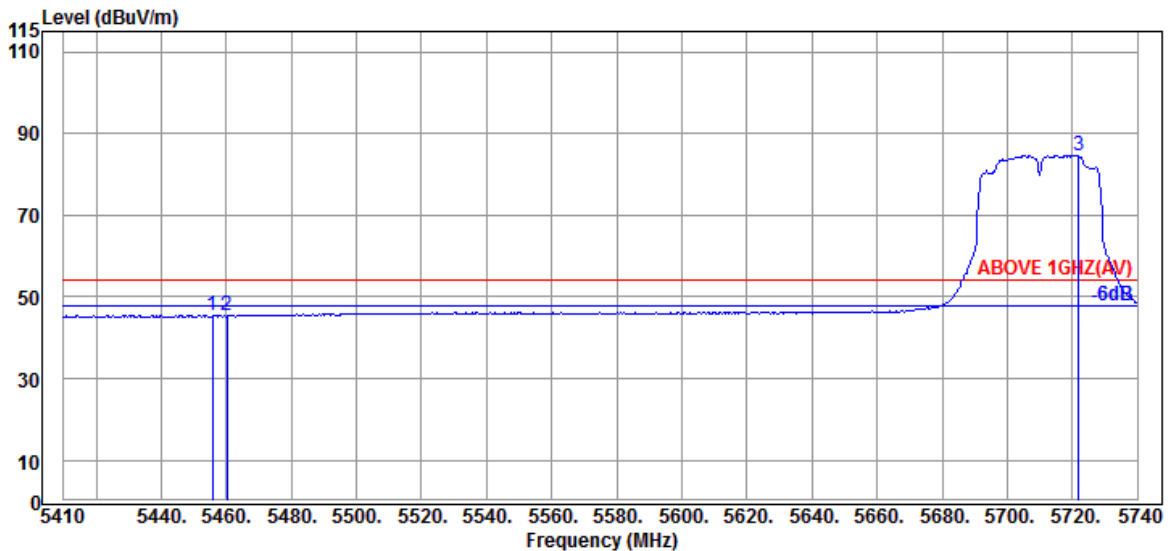


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.870	34.60	9.05	34.21	36.03	45.47	54.00	8.53	Average
5460.160	34.60	9.05	34.21	35.90	45.34	54.00	8.66	Average
@ 5721.850	34.80	9.19	34.30	75.06	84.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

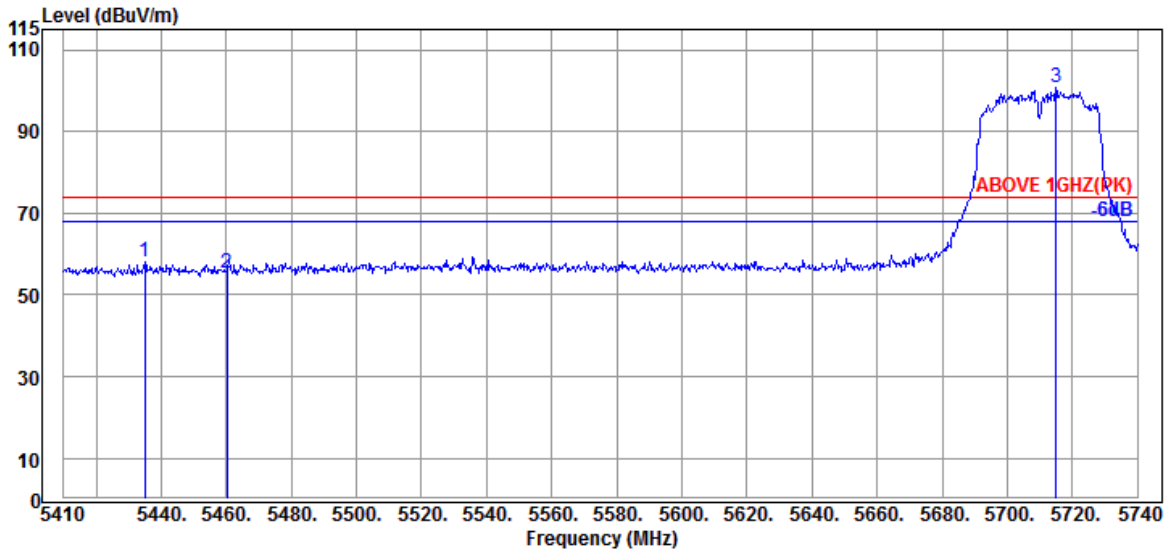

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.080	34.65	9.04	34.22	48.65	58.12	74.00	15.88	Peak
5460.160	34.60	9.05	34.21	45.74	55.18	74.00	18.82	Peak
@ 5714.920	34.80	9.19	34.30	91.04	100.73	---	---	Peak

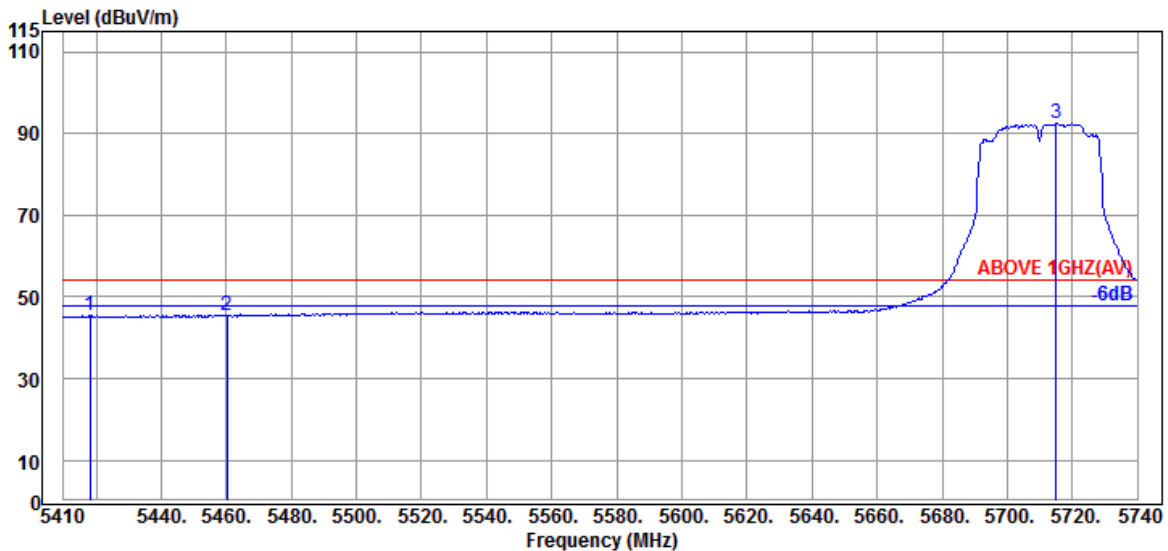


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.250	34.70	9.04	34.23	35.96	45.47	54.00	8.53	Average
5460.160	34.60	9.05	34.21	35.91	45.35	54.00	8.65	Average
@ 5714.920	34.80	9.19	34.30	82.92	92.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

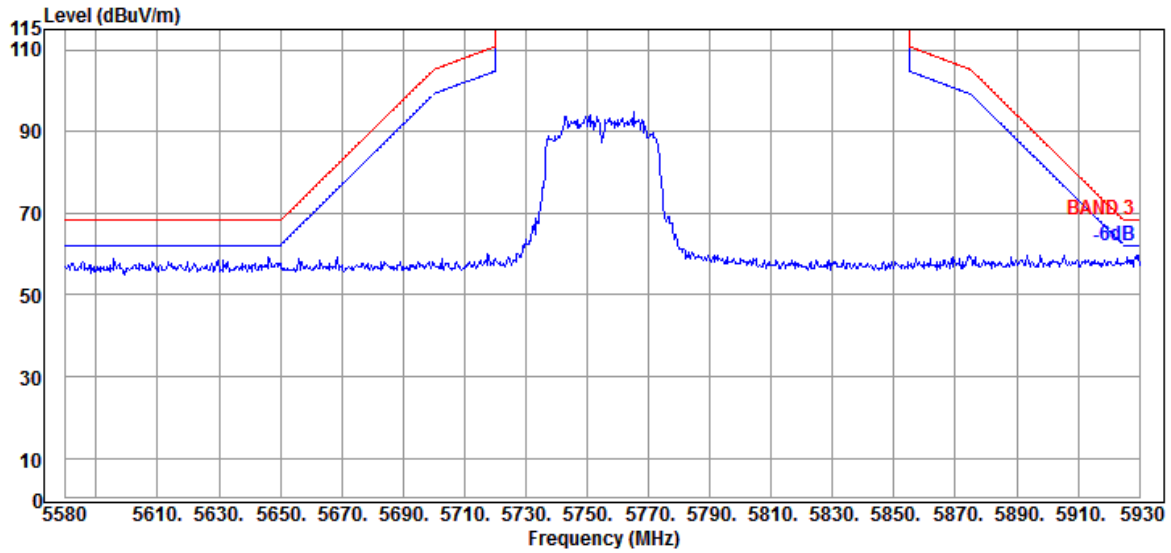


Antenna at Vertical Polarization

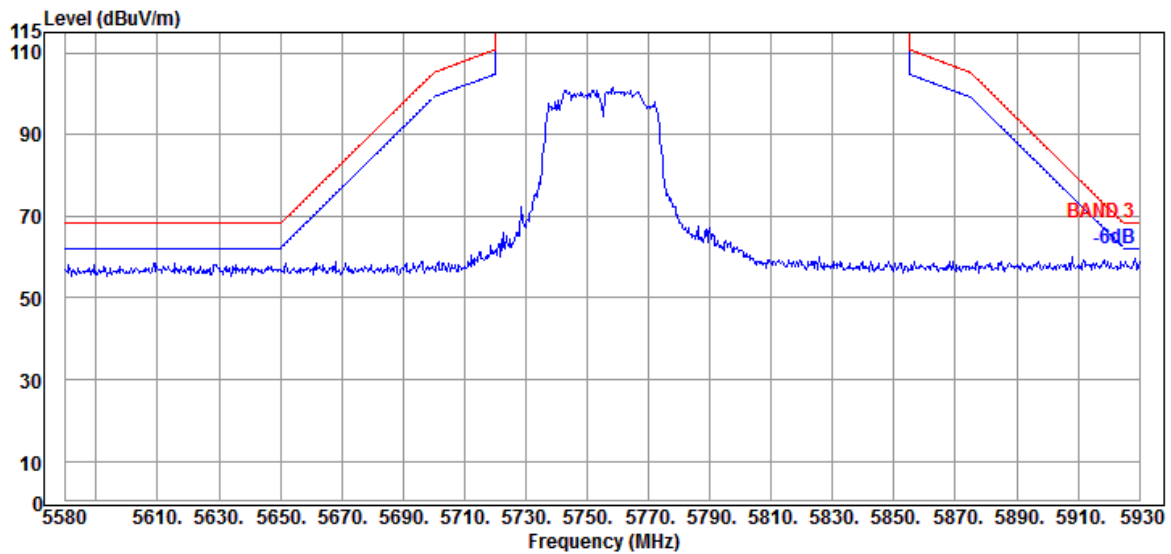


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

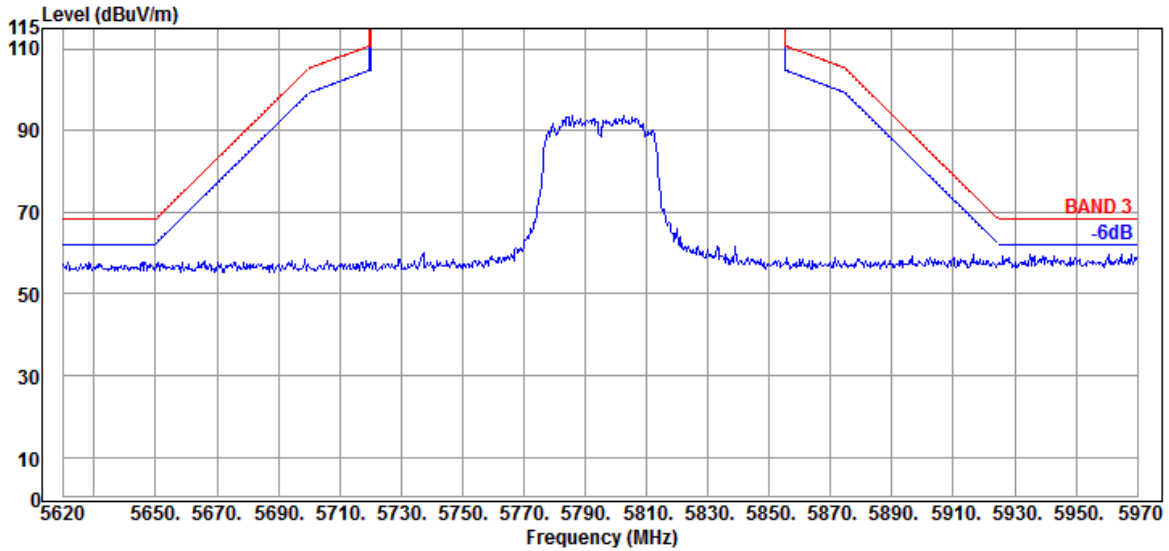

Antenna at Vertical Polarization

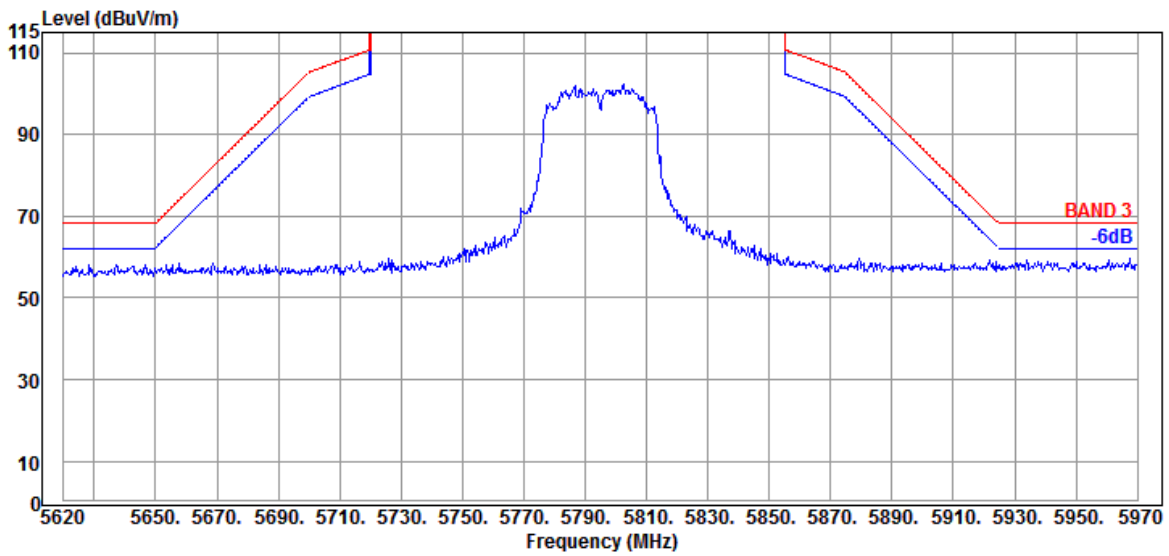


Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

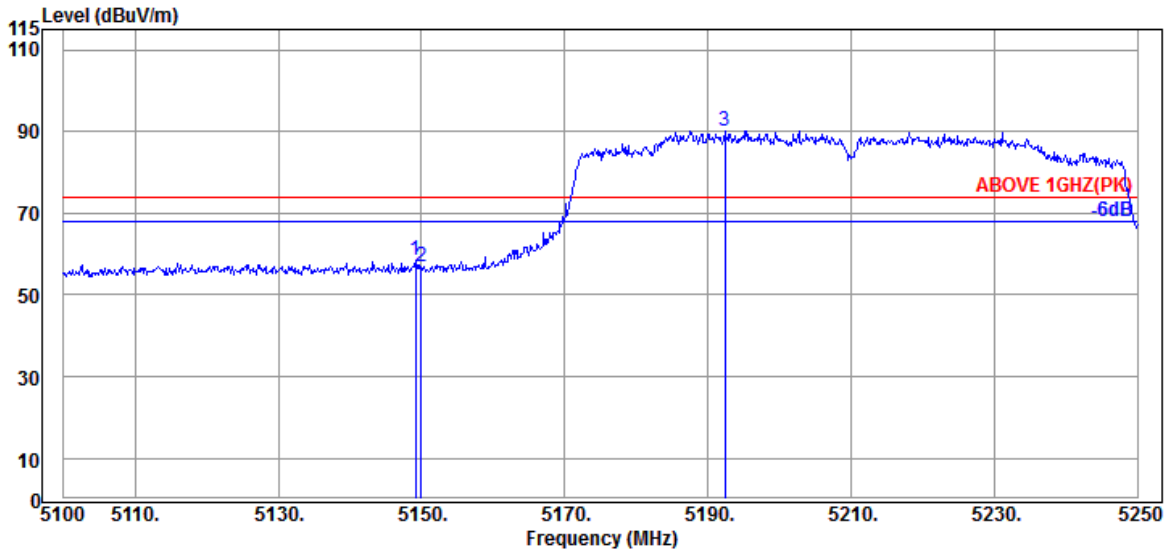

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.88	34.34	49.51	58.55	74.00	15.45	Peak
5149.950	34.50	8.88	34.34	47.81	56.85	74.00	17.15	Peak
@ 5192.400	34.70	8.91	34.32	80.92	90.21	---	---	Peak

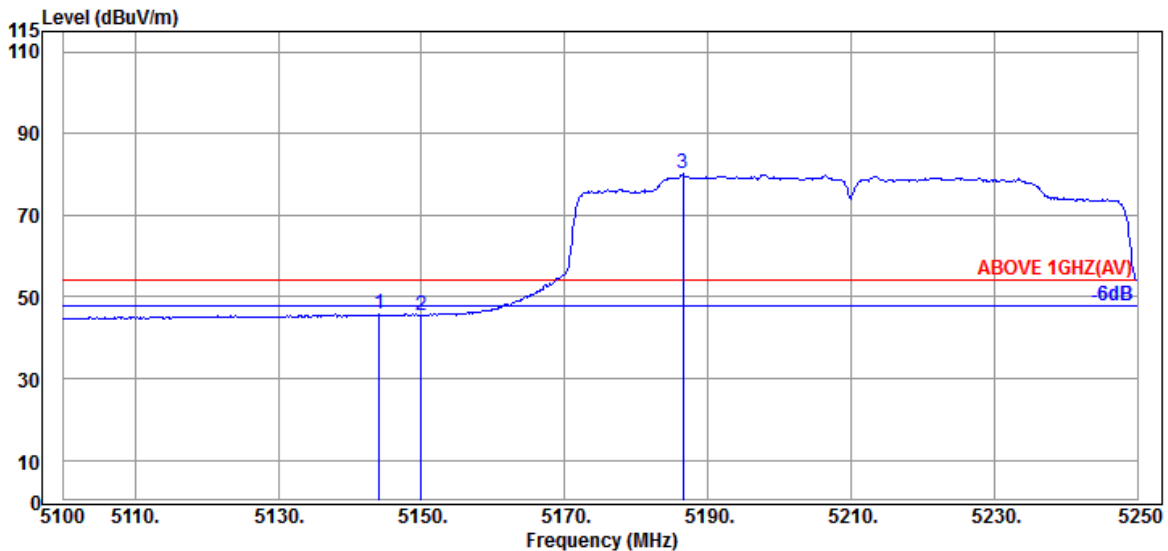


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	34.50	8.88	34.34	36.63	45.67	54.00	8.33	Average
5149.950	34.50	8.88	34.34	36.46	45.50	54.00	8.50	Average
@ 5186.550	34.70	8.91	34.32	70.75	80.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

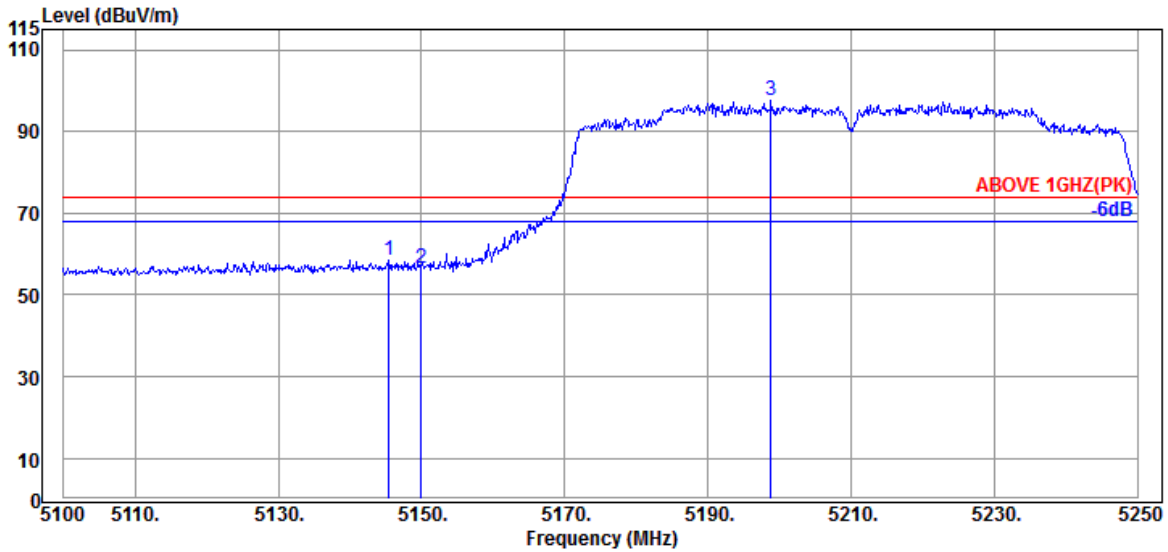

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	34.50	8.88	34.34	49.42	58.46	74.00	15.54	Peak
5149.950	34.50	8.88	34.34	47.41	56.45	74.00	17.55	Peak
@ 5198.850	34.70	8.91	34.32	88.15	97.44	---	---	Peak

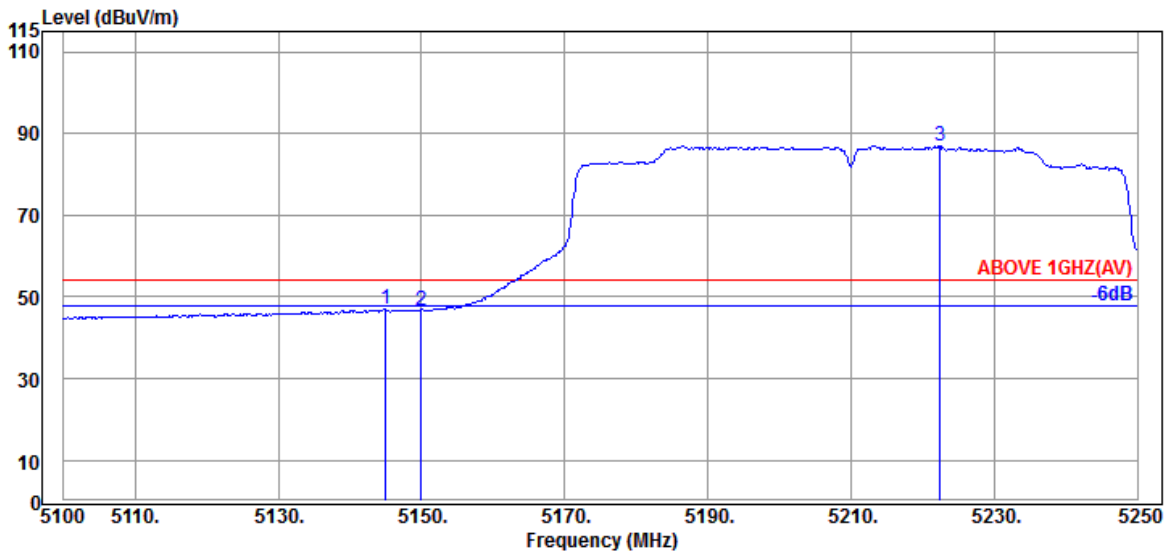


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.50	8.88	34.34	37.94	46.98	54.00	7.02	Average
5149.950	34.50	8.88	34.34	37.65	46.69	54.00	7.31	Average
@ 5222.400	34.60	8.93	34.31	77.88	87.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

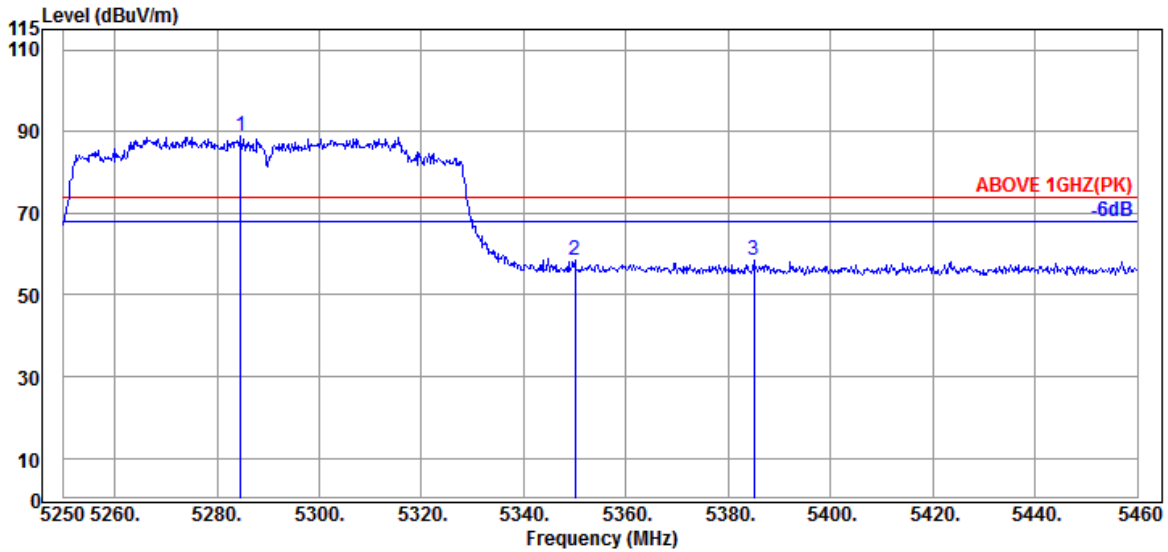

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.650	34.43	8.96	34.28	79.82	88.93	---	---	Peak
5349.960	34.90	8.99	34.26	48.67	58.30	74.00	15.70	Peak
5385.030	34.83	9.01	34.24	48.92	58.52	74.00	15.48	Peak

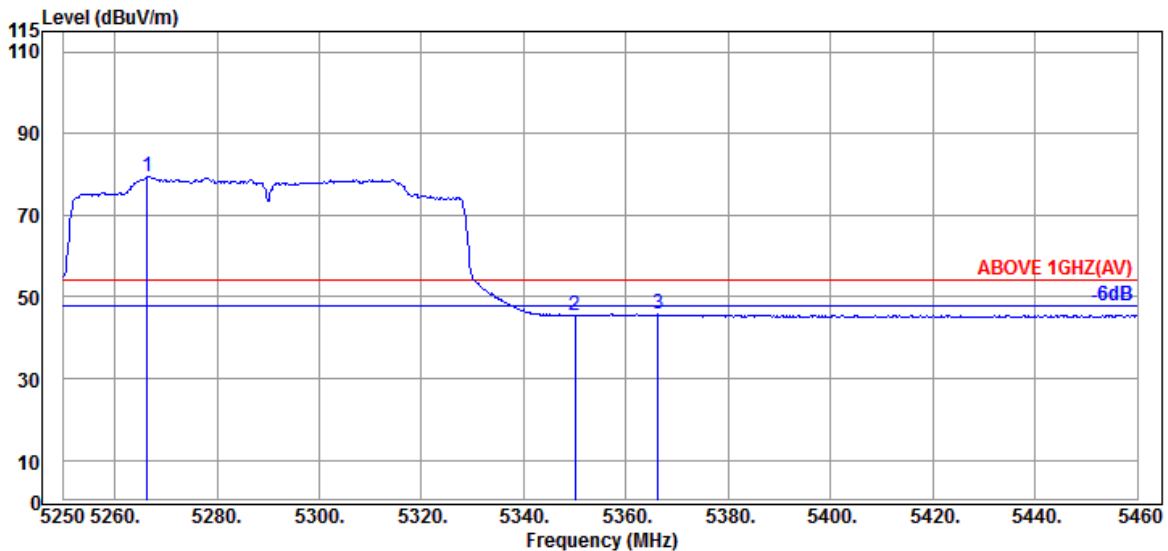

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.380	34.47	8.95	34.29	70.48	79.61	---	---	Average
5349.960	34.90	8.99	34.26	35.87	45.50	54.00	8.50	Average
5366.340	34.87	9.00	34.25	36.17	45.79	54.00	8.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

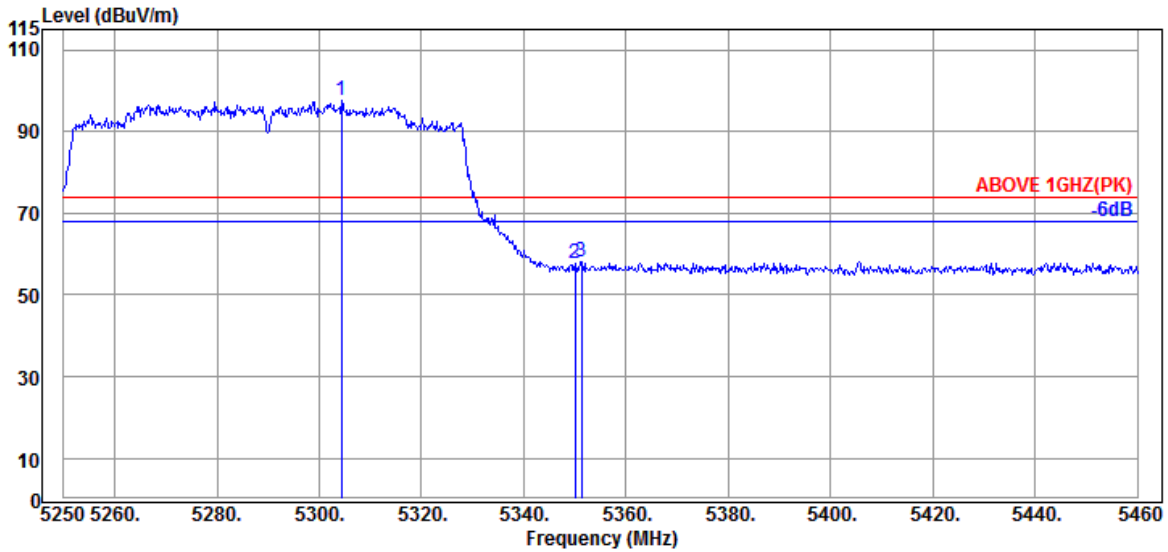

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.390	34.40	8.97	34.28	88.42	97.51	---	---	Peak
5349.960	34.90	8.99	34.26	47.93	57.56	74.00	16.44	Peak
5351.220	34.90	8.99	34.26	48.45	58.08	74.00	15.92	Peak

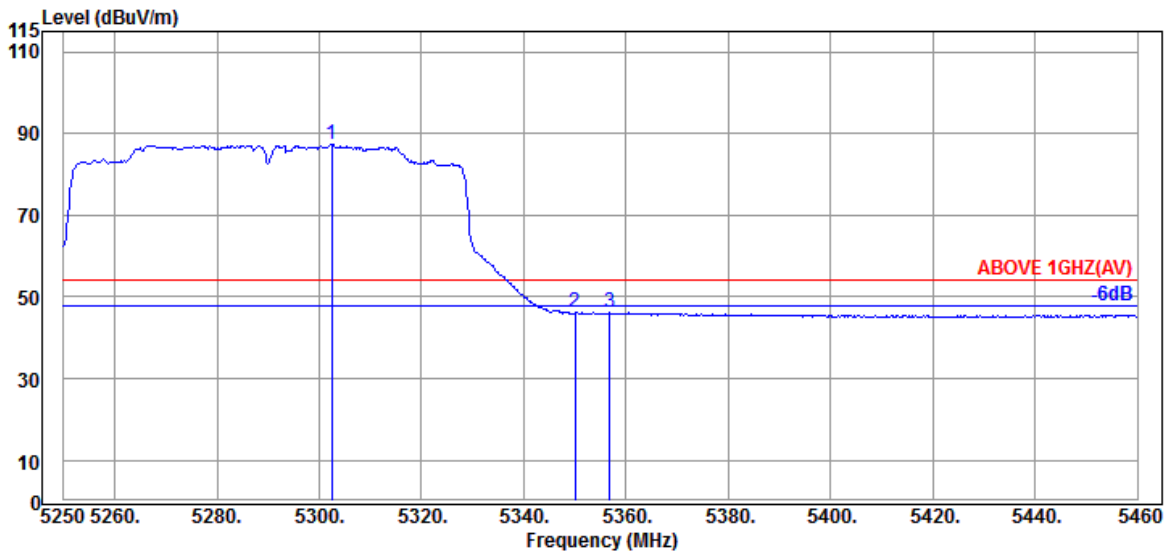


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	34.40	8.97	34.28	78.31	87.40	---	---	Average
5349.960	34.90	8.99	34.26	36.47	46.10	54.00	7.90	Average
5356.890	34.87	9.00	34.26	36.49	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

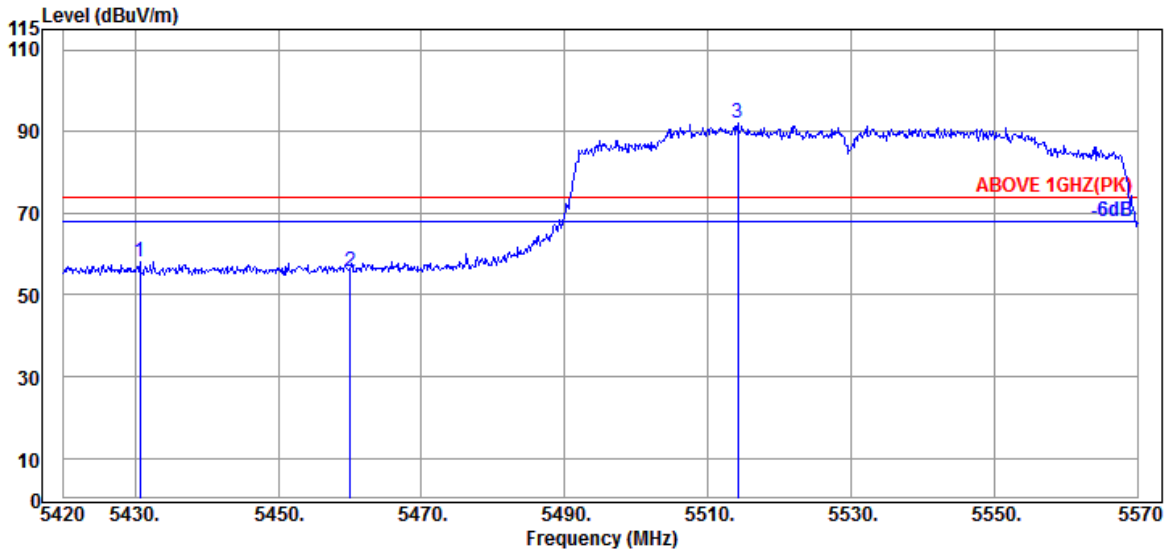

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.650	34.70	9.04	34.23	48.66	58.17	74.00	15.83	Peak
5460.050	34.60	9.05	34.21	46.16	55.60	74.00	18.40	Peak
@ 5514.200	34.70	9.09	34.21	82.59	92.17	---	---	Peak

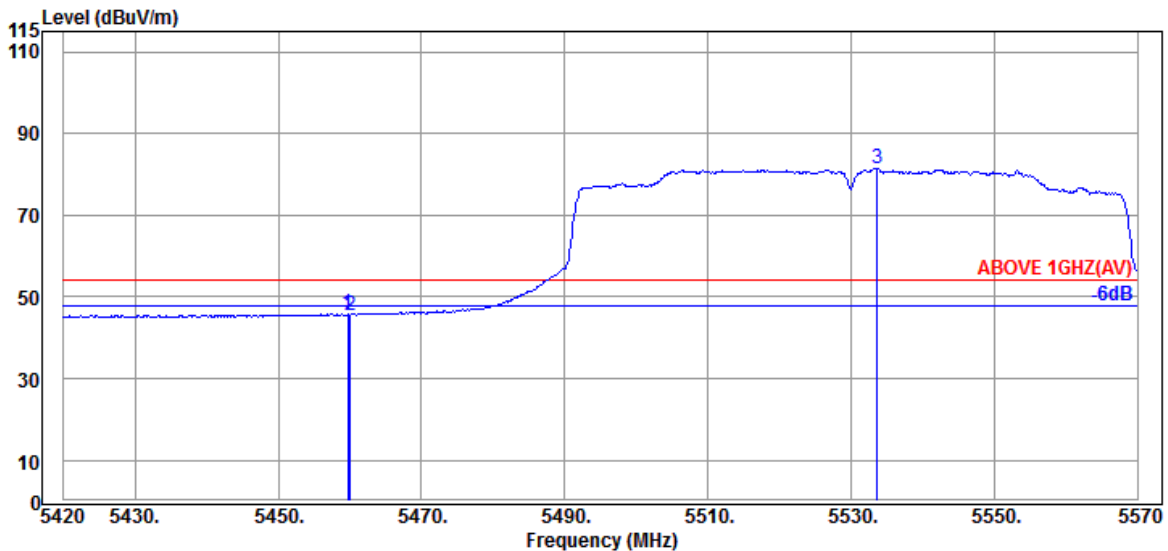


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.60	9.05	34.21	36.39	45.83	54.00	8.17	Average
5460.050	34.60	9.05	34.21	36.15	45.59	54.00	8.41	Average
@ 5533.700	34.70	9.09	34.22	71.87	81.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

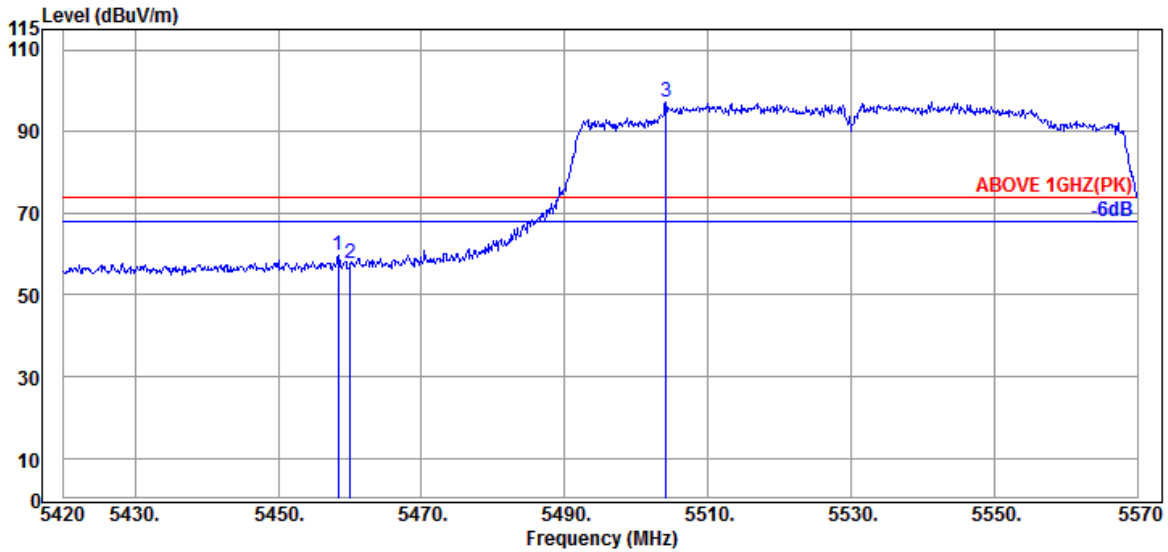

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.60	9.05	34.21	50.07	59.51	74.00	14.49	Peak
5460.050	34.60	9.05	34.21	48.28	57.72	74.00	16.28	Peak
@ 5504.150	34.70	9.08	34.20	87.65	97.23	---	---	Peak

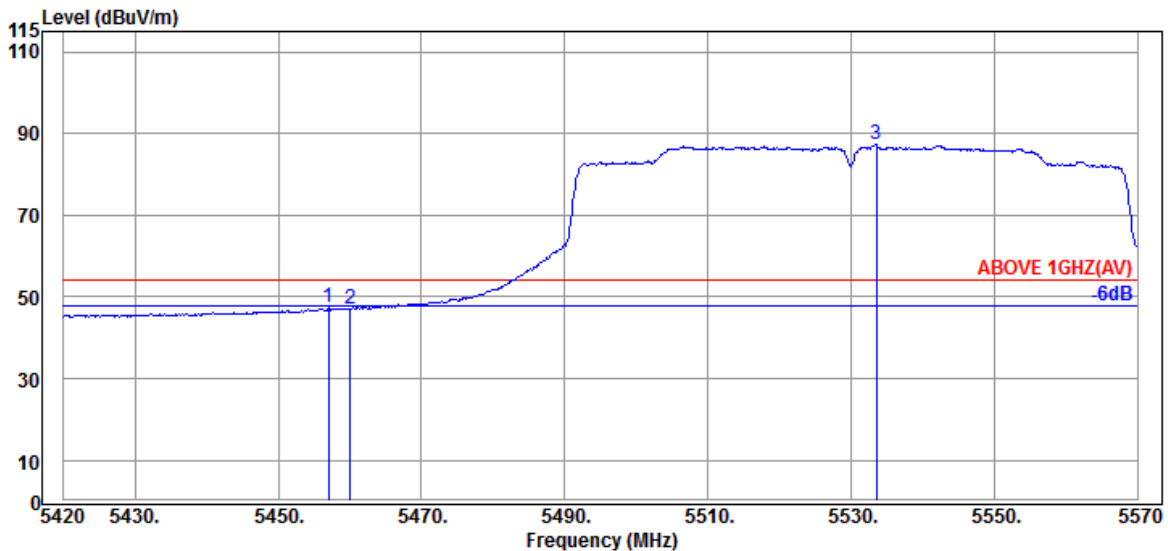


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.050	34.60	9.05	34.21	37.82	47.26	54.00	6.74	Average
5460.050	34.60	9.05	34.21	37.65	47.09	54.00	6.91	Average
@ 5533.550	34.70	9.09	34.22	77.73	87.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

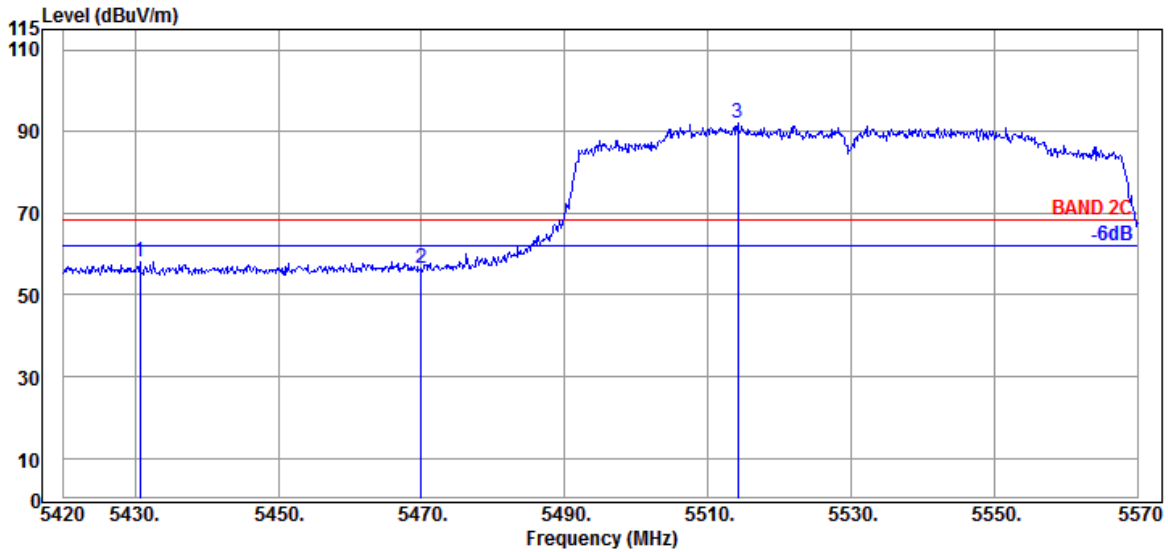

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.650	34.70	9.04	34.23	48.66	58.17	68.20	10.03	Peak
5469.950	34.63	9.06	34.21	47.15	56.63	68.20	11.57	Peak
@ 5514.200	34.70	9.09	34.21	82.59	92.17	---	---	Peak

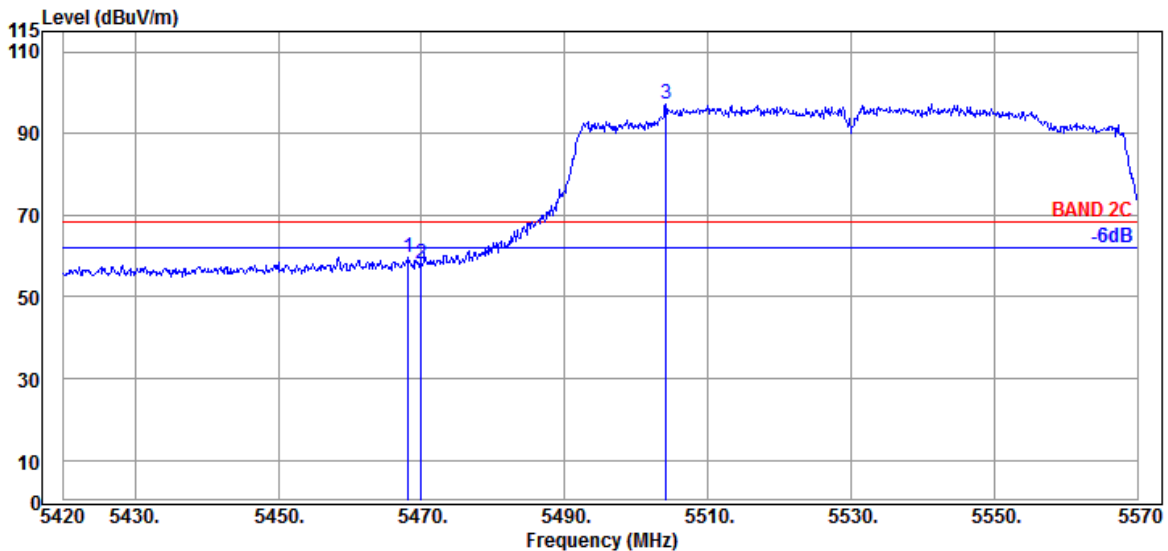


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.63	9.06	34.21	50.34	59.82	68.20	8.38	Peak
5469.950	34.63	9.06	34.21	48.45	57.93	68.20	10.27	Peak
@ 5504.150	34.70	9.08	34.20	87.65	97.23	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

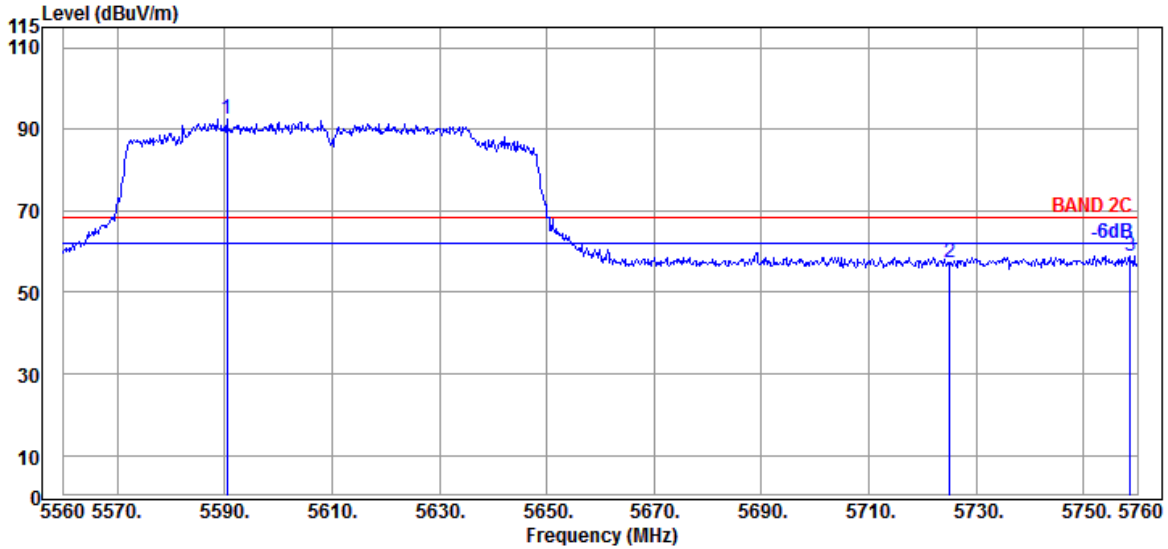

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5590.400	34.50	9.12	34.24	83.17	92.55	---	---	Peak
	5725.000	34.90	9.20	34.30	47.56	57.36	68.20	10.84	Peak
	5758.600	35.03	9.21	34.32	49.10	59.02	68.20	9.18	Peak

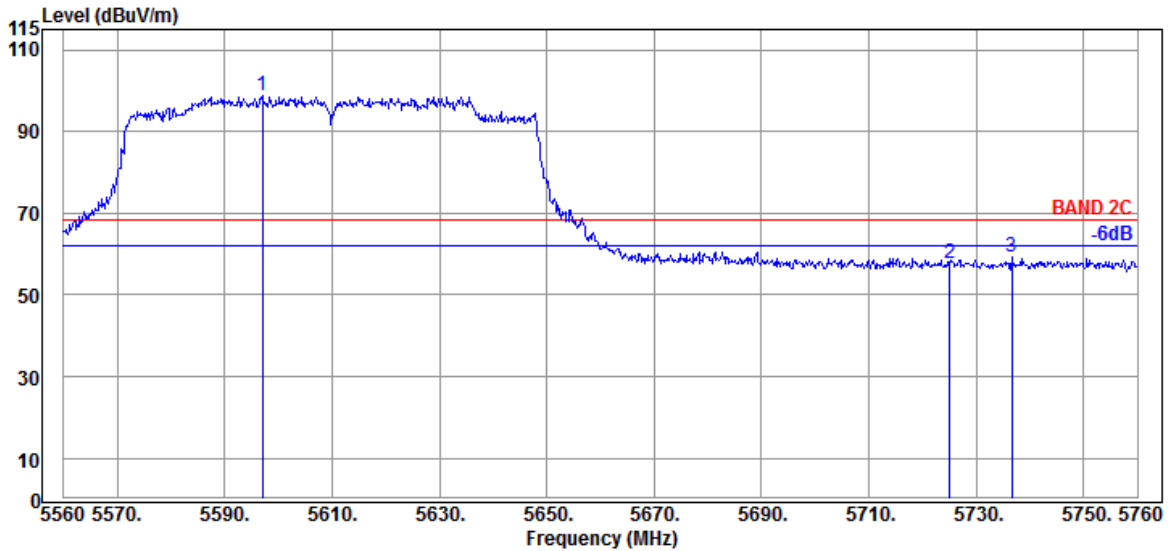


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5597.000	34.40	9.13	34.25	89.55	98.83	---	---	Peak
	5725.000	34.90	9.20	34.30	47.85	57.65	68.20	10.55	Peak
	5736.600	34.90	9.20	34.31	49.50	59.29	68.20	8.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

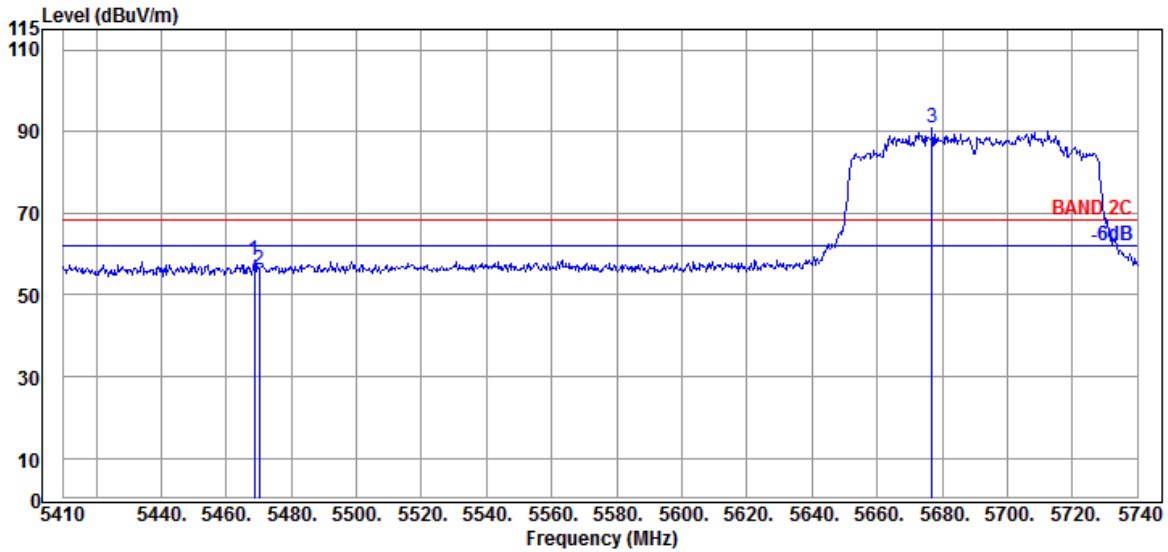

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.740	34.63	9.06	34.21	48.98	58.46	68.20	9.74	Peak
5470.060	34.63	9.06	34.21	46.76	56.24	68.20	11.96	Peak
5676.970	34.63	9.17	34.29	81.38	90.89	---	---	Peak

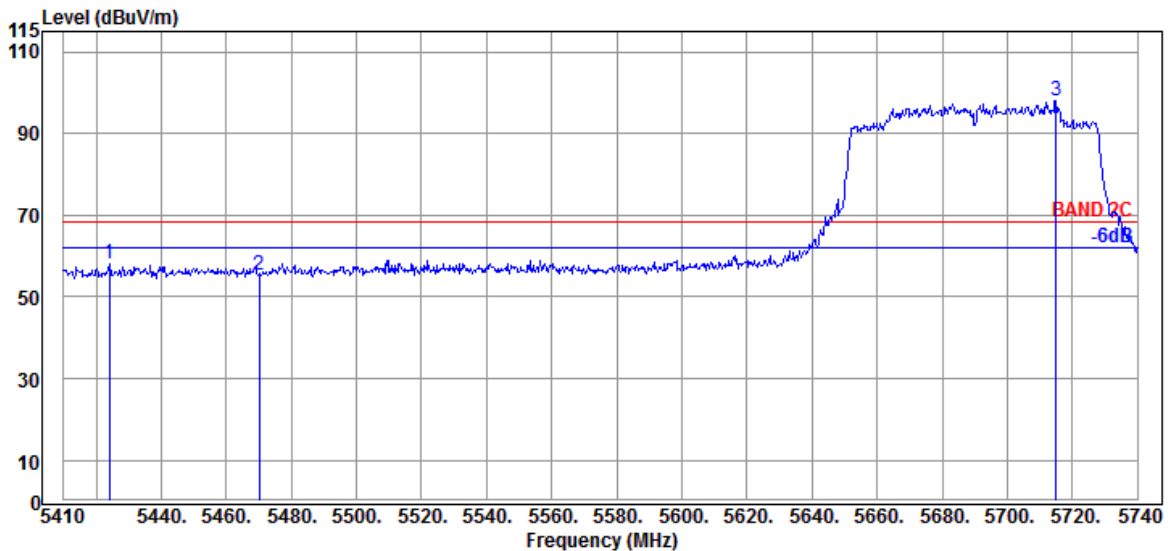


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5424.190	34.70	9.04	34.23	48.43	57.94	68.20	10.26	Peak
5470.060	34.63	9.06	34.21	45.66	55.14	68.20	13.06	Peak
5714.920	34.80	9.19	34.30	88.39	98.08	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

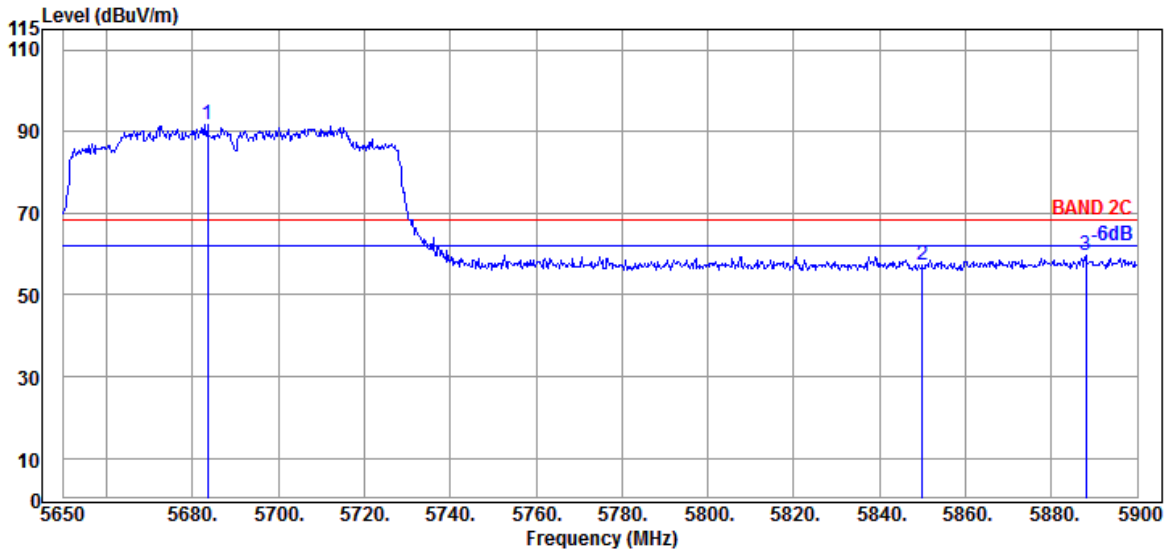

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.500	34.63	9.17	34.29	82.08	91.59	---	---	Peak
5850.000	35.40	9.25	34.36	46.83	57.12	68.20	11.08	Peak
5888.000	35.67	9.27	34.38	49.05	59.61	68.20	8.59	Peak

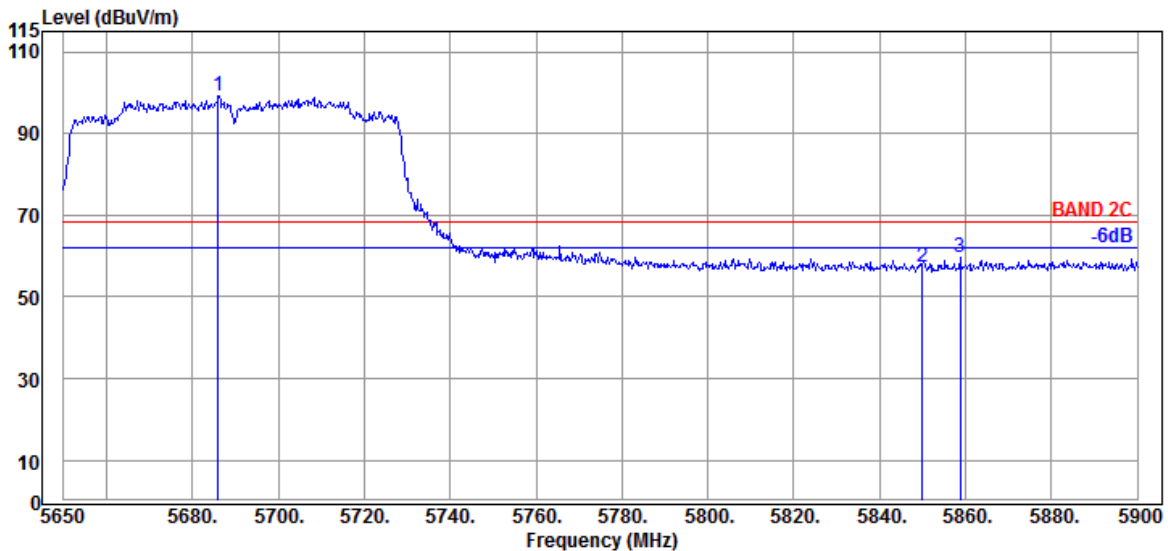


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5686.000	34.63	9.17	34.29	89.77	99.28	---	---	Peak
5850.000	35.40	9.25	34.36	47.16	57.45	68.20	10.75	Peak
5858.750	35.53	9.26	34.36	49.30	59.73	68.20	8.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

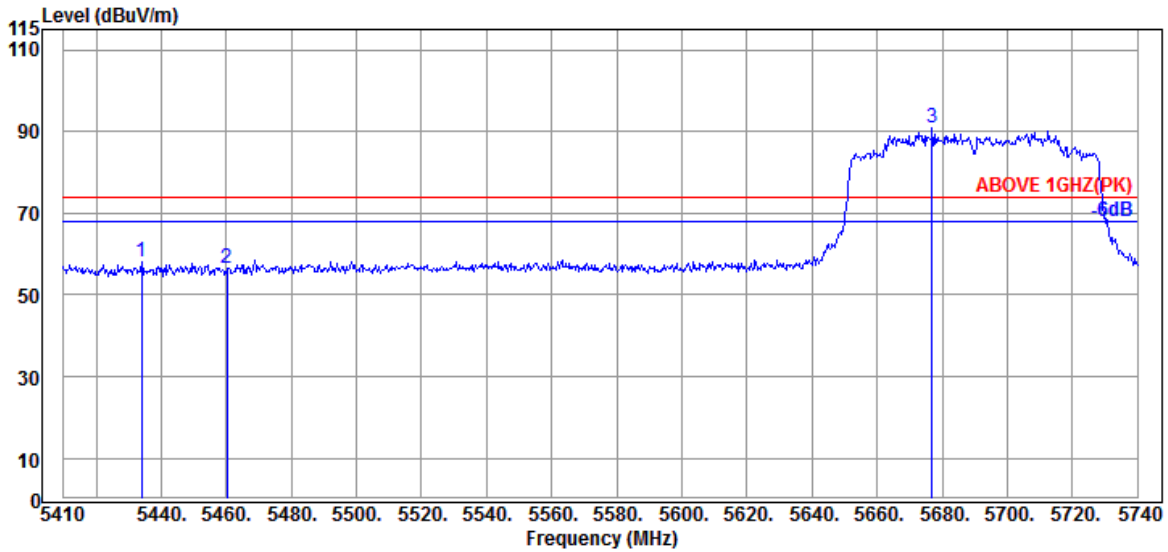

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.090	34.65	9.04	34.22	48.44	57.91	74.00	16.09	Peak
5460.160	34.60	9.05	34.21	47.00	56.44	74.00	17.56	Peak
@ 5676.970	34.63	9.17	34.29	81.38	90.89	---	---	Peak

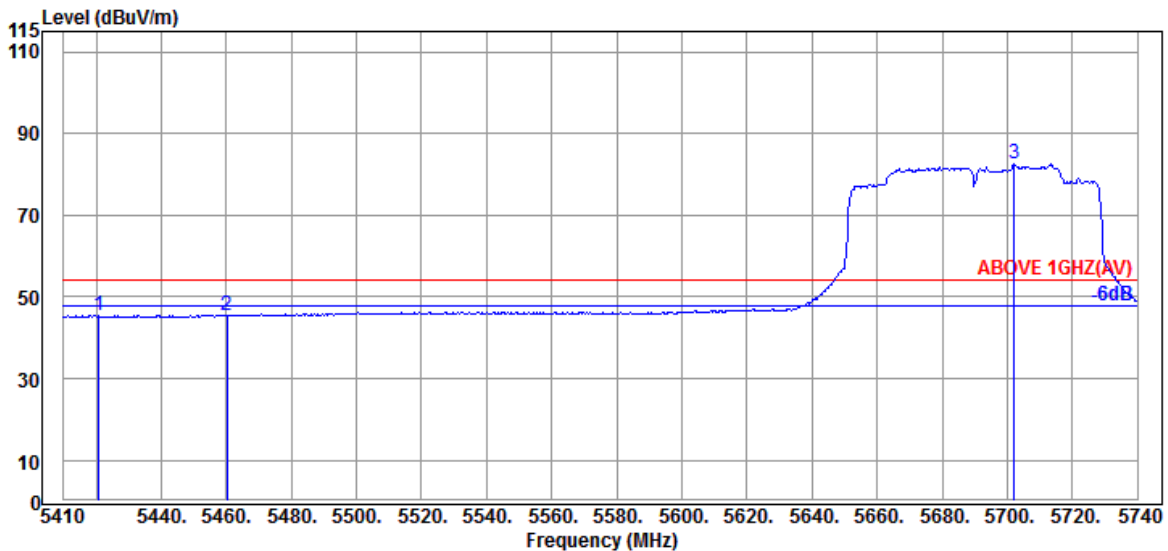


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.890	34.70	9.04	34.23	35.98	45.49	54.00	8.51	Average
5460.160	34.60	9.05	34.21	35.88	45.32	54.00	8.68	Average
@ 5702.050	34.70	9.18	34.29	72.84	82.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

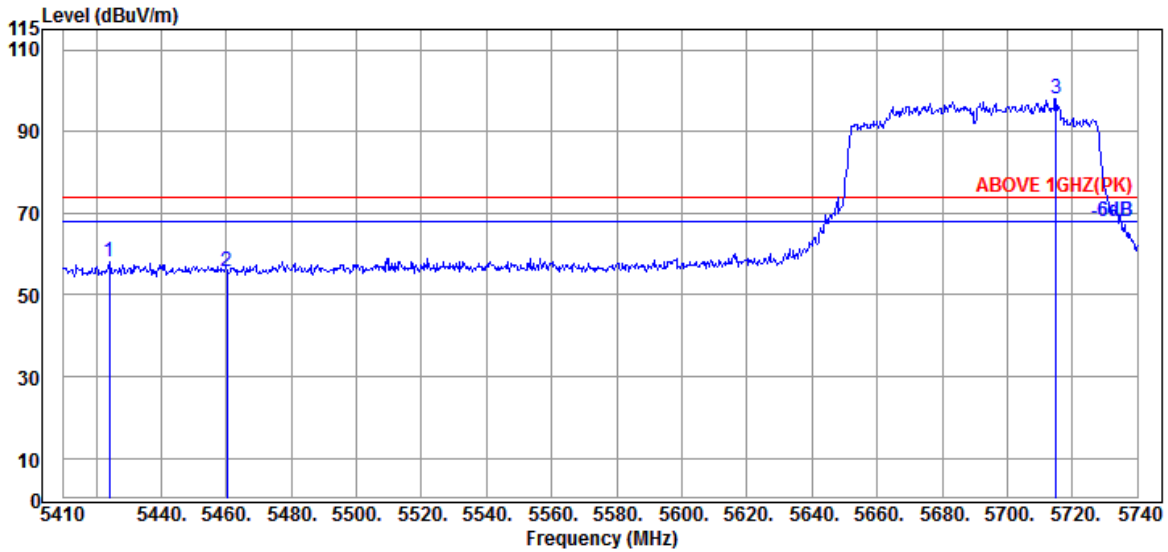

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.190	34.70	9.04	34.23	48.43	57.94	74.00	16.06	Peak
5460.160	34.60	9.05	34.21	46.23	55.67	74.00	18.33	Peak
@ 5714.920	34.80	9.19	34.30	88.39	98.08	---	---	Peak

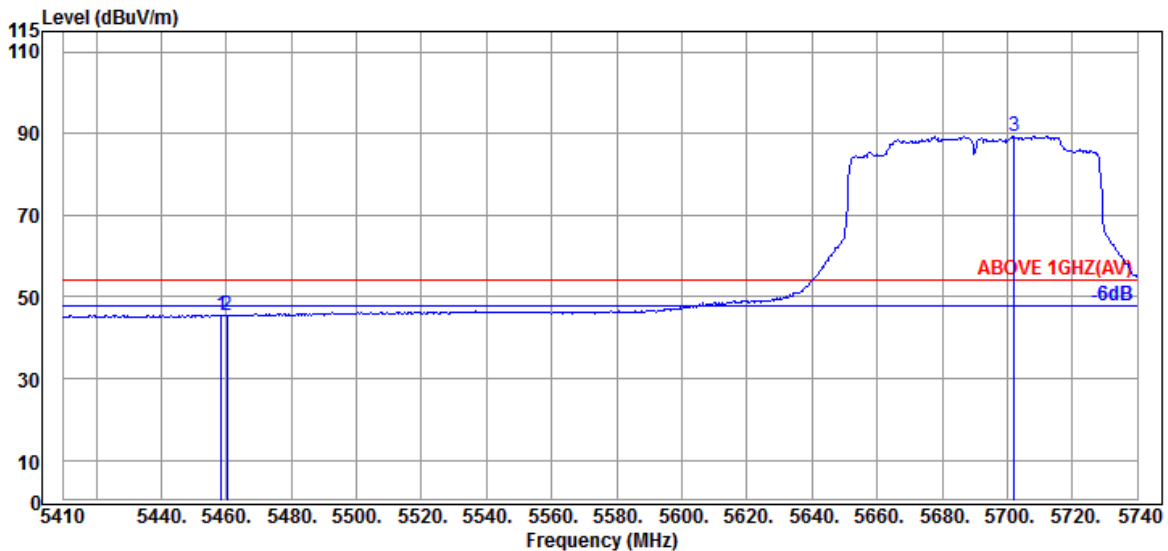


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.60	9.05	34.21	36.14	45.58	54.00	8.42	Average
5460.160	34.60	9.05	34.21	36.20	45.64	54.00	8.36	Average
@ 5702.050	34.70	9.18	34.29	79.83	89.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

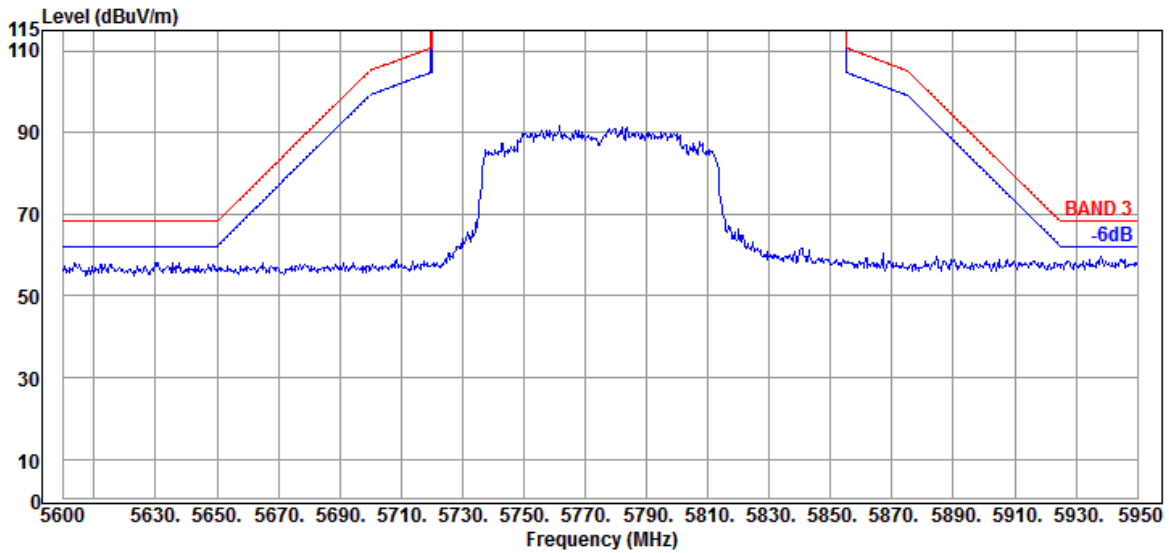

Antenna at Vertical Polarization

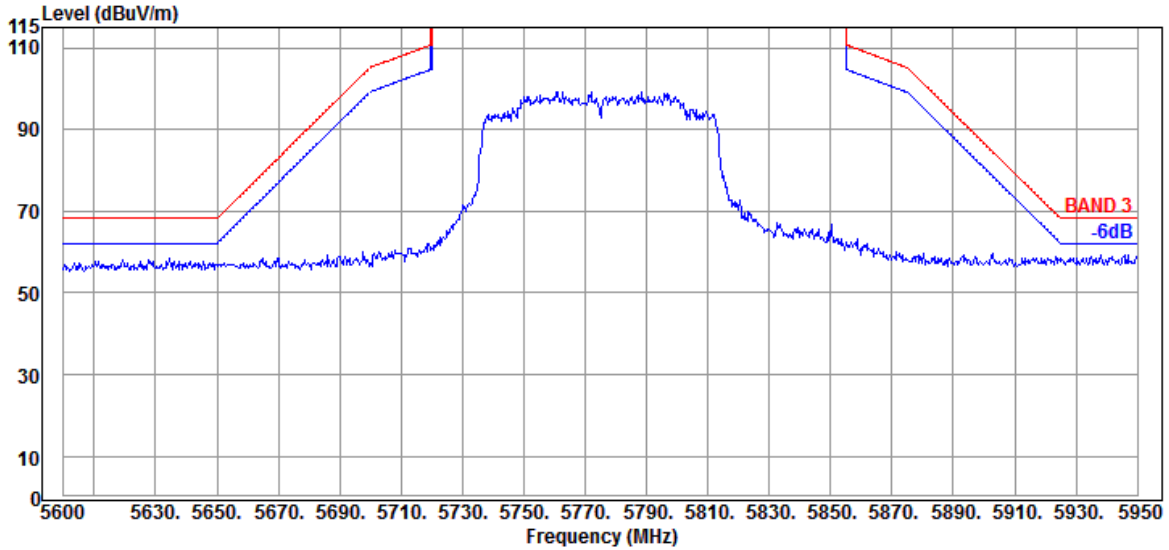


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

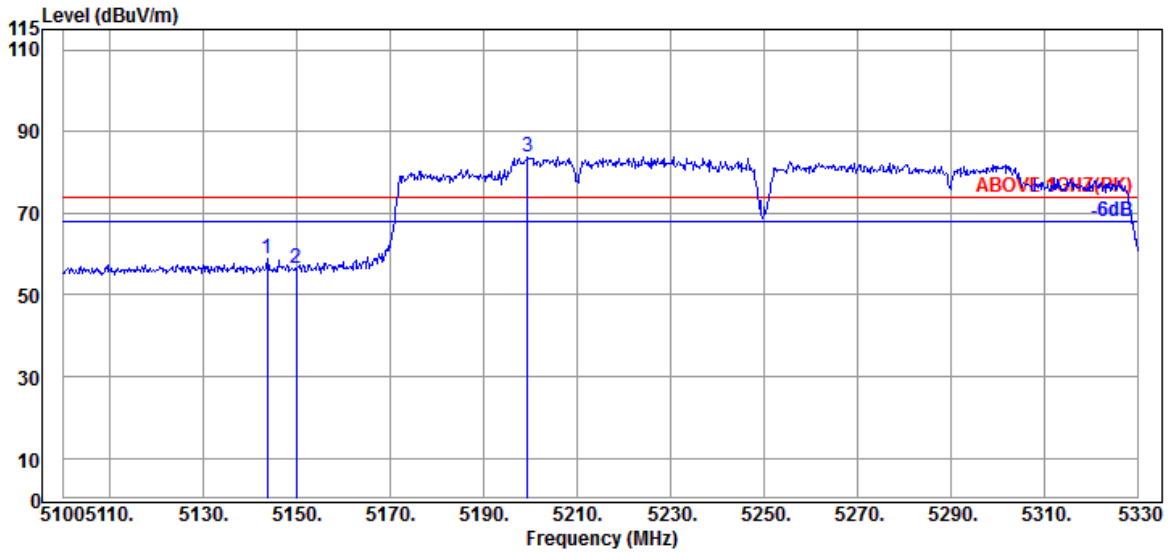

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.700	34.50	8.88	34.34	49.72	58.76	74.00	15.24	Peak
5149.910	34.50	8.88	34.34	47.30	56.34	74.00	17.66	Peak
@ 5199.360	34.70	8.91	34.32	74.48	83.77	---	---	Peak

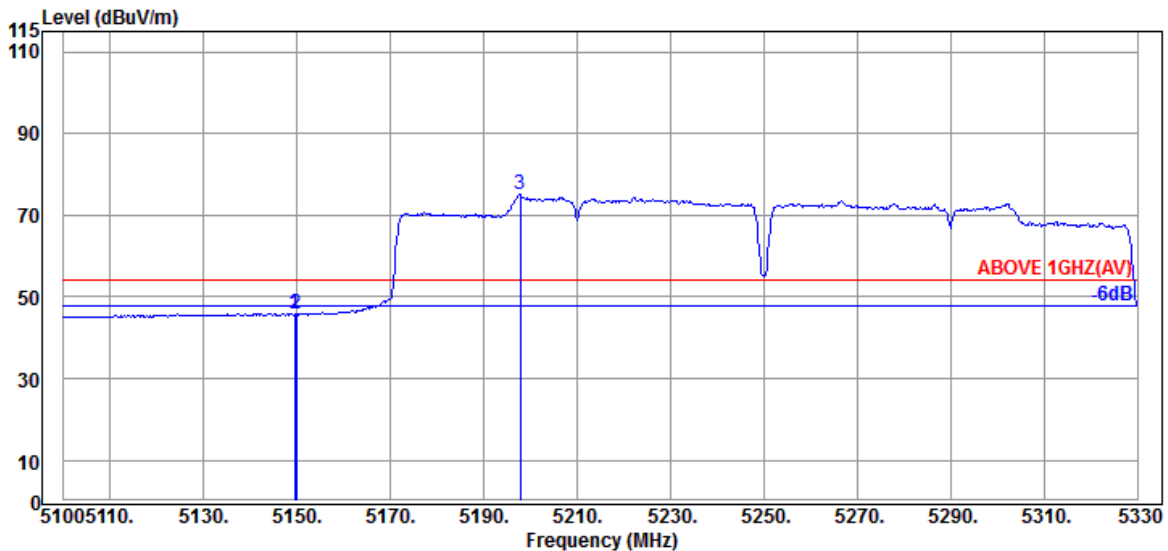


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.50	8.88	34.34	36.80	45.84	54.00	8.16	Average
5149.910	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Average
@ 5197.750	34.70	8.91	34.32	65.78	75.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

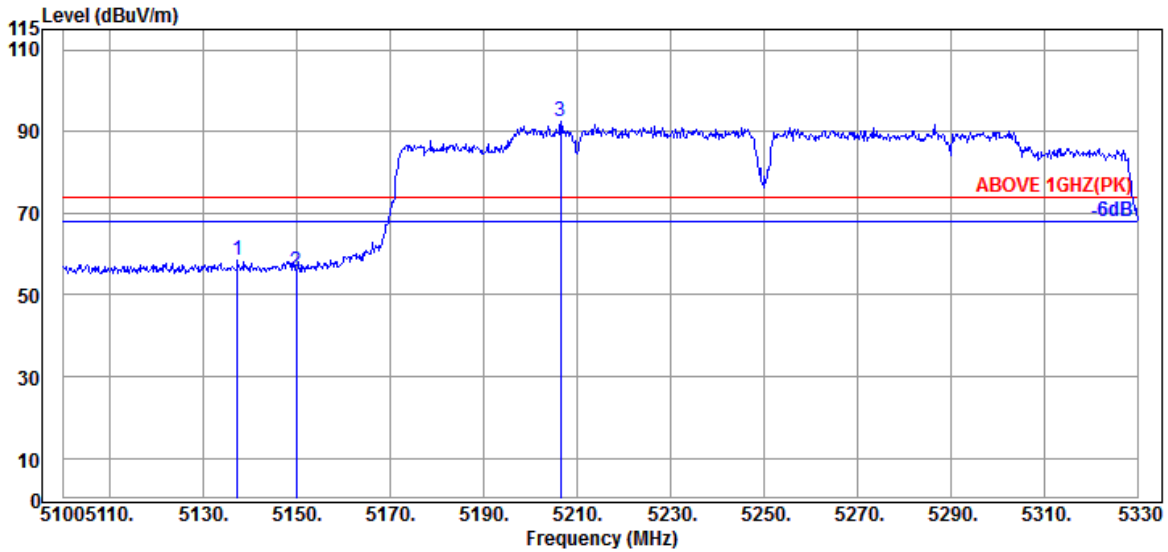

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.260	34.40	8.88	34.34	49.69	58.63	74.00	15.37	Peak
5149.910	34.50	8.88	34.34	46.79	55.83	74.00	18.17	Peak
@ 5206.490	34.65	8.92	34.32	83.03	92.28	---	---	Peak

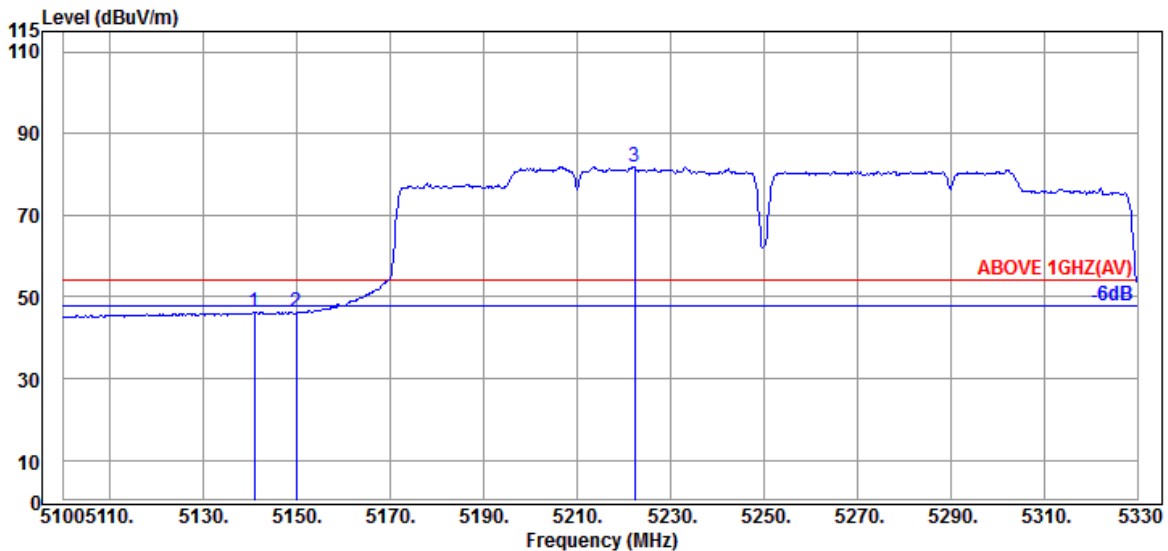


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.940	34.40	8.88	34.34	37.32	46.26	54.00	7.74	Average
5149.910	34.50	8.88	34.34	37.04	46.08	54.00	7.92	Average
@ 5222.360	34.60	8.93	34.31	72.58	81.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

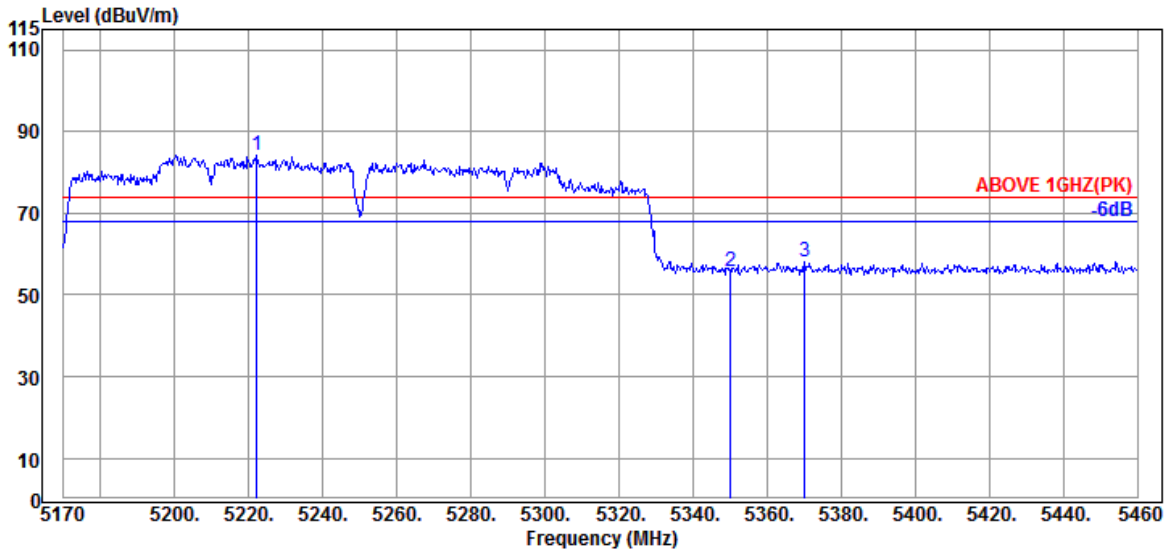

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	34.60	8.93	34.31	74.76	83.98	---	---	Peak
5350.090	34.90	8.99	34.26	46.28	55.91	74.00	18.09	Peak
5370.100	34.83	9.01	34.25	48.36	57.95	74.00	16.05	Peak

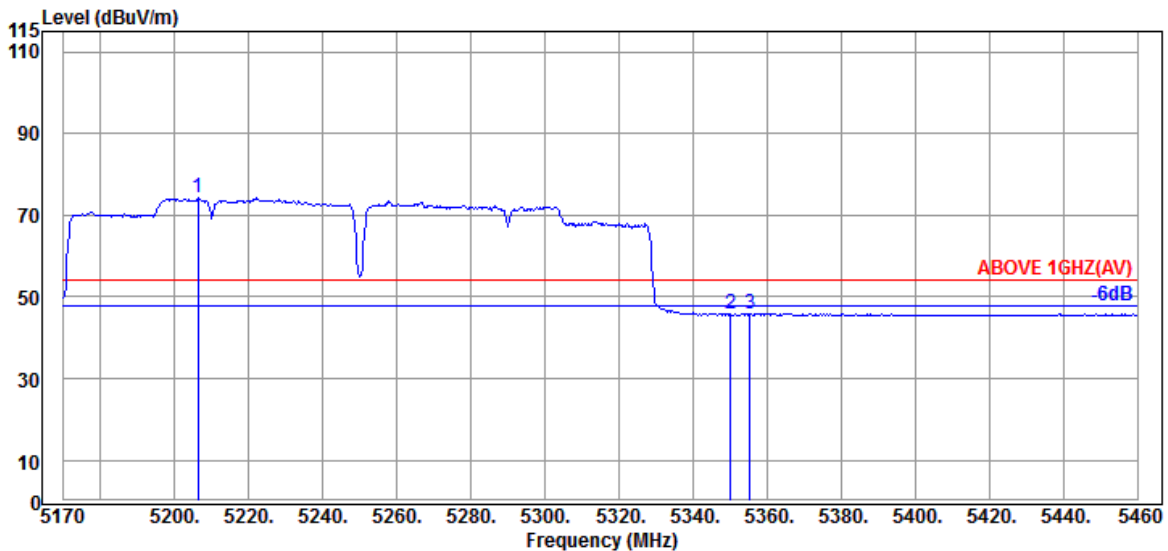


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.250	34.65	8.92	34.32	65.12	74.37	---	---	Average
5350.090	34.90	8.99	34.26	36.09	45.72	54.00	8.28	Average
5355.310	34.87	9.00	34.26	36.31	45.92	54.00	8.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

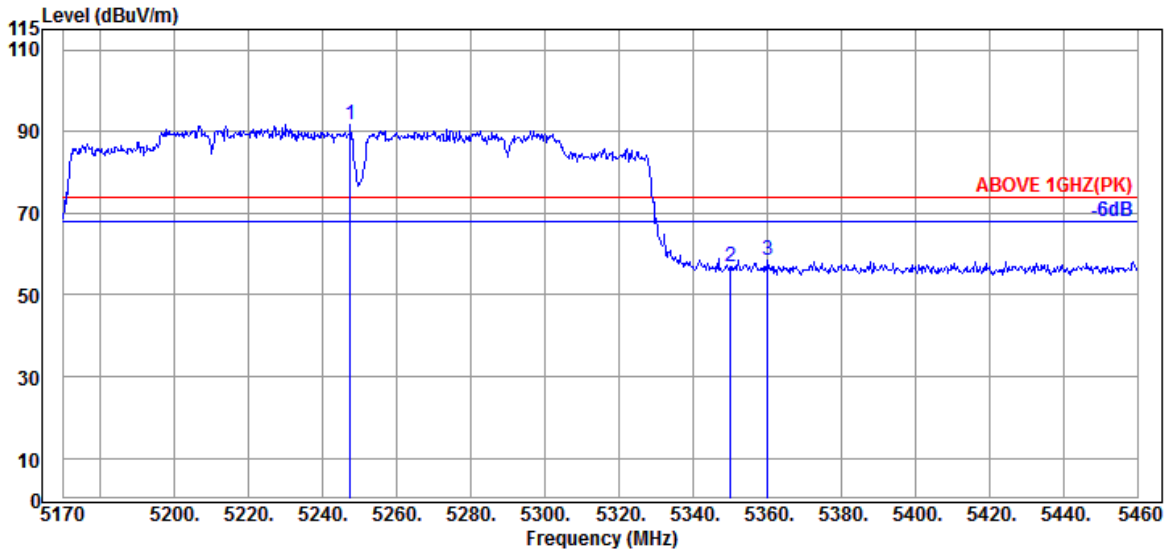

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5247.430	34.50	8.94	34.30	82.59	91.73	---	---	Peak
5350.090	34.90	8.99	34.26	47.17	56.80	74.00	17.20	Peak
5360.240	34.87	9.00	34.26	48.98	58.59	74.00	15.41	Peak

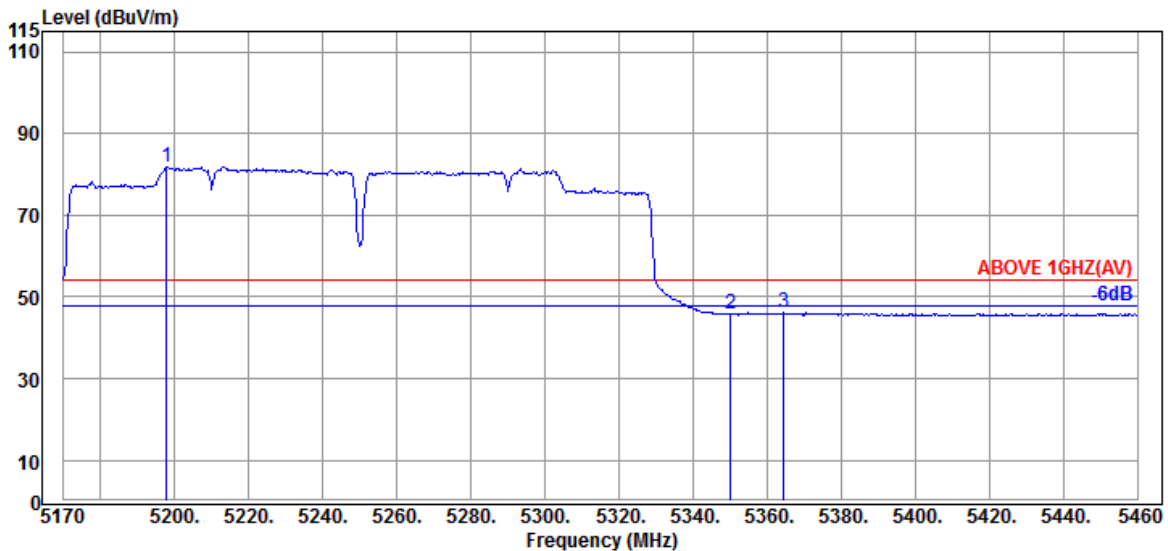


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.70	8.91	34.32	72.65	81.94	---	---	Average
5350.090	34.90	8.99	34.26	36.12	45.75	54.00	8.25	Average
5364.590	34.87	9.00	34.25	36.46	46.08	54.00	7.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

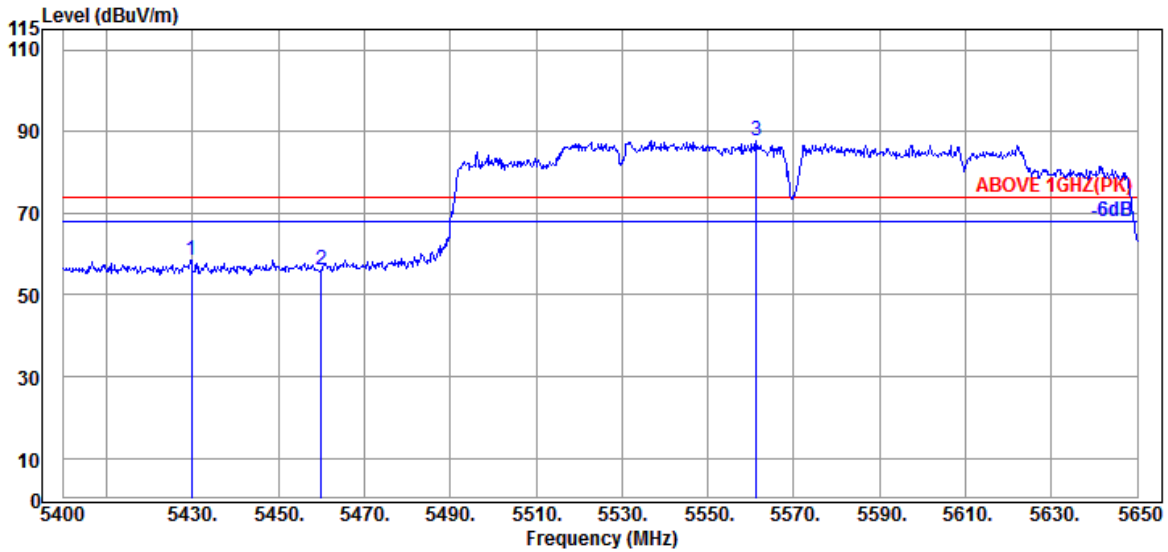

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.750	34.70	9.04	34.23	49.15	58.66	74.00	15.34	Peak
5460.000	34.60	9.05	34.21	46.87	56.31	74.00	17.69	Peak
@ 5561.250	34.60	9.11	34.23	78.45	87.93	---	---	Peak

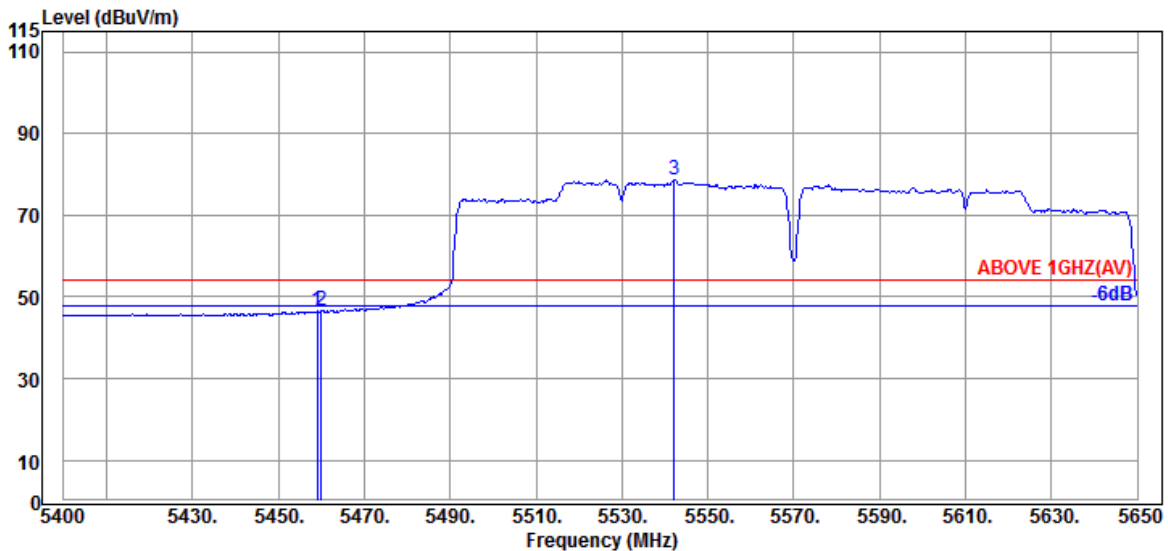


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	37.05	46.49	54.00	7.51	Average
5460.000	34.60	9.05	34.21	37.23	46.67	54.00	7.33	Average
@ 5542.250	34.70	9.09	34.23	69.09	78.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

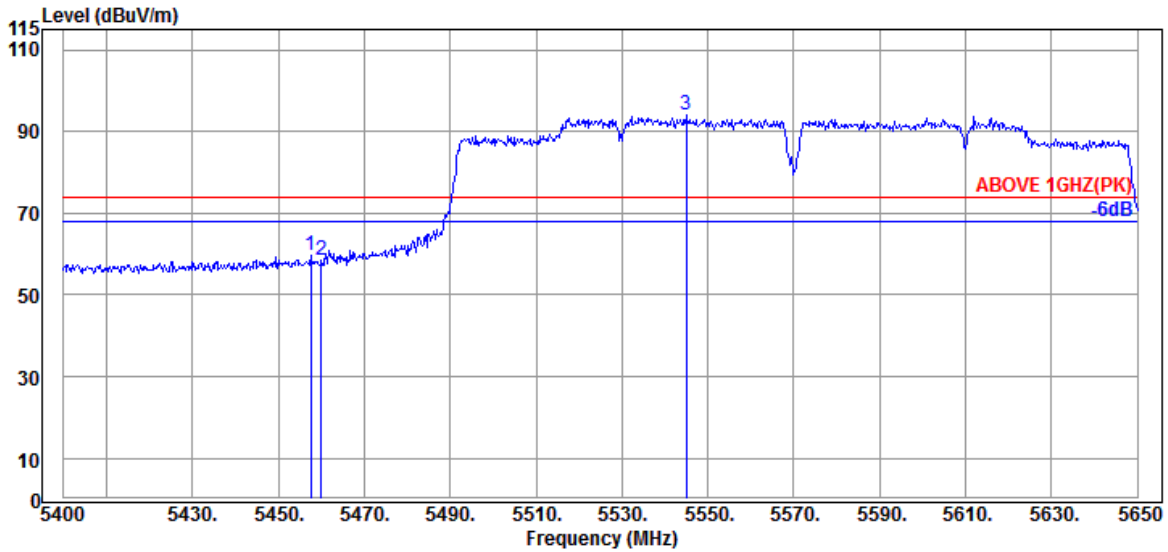

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	9.05	34.21	50.07	59.51	74.00	14.49	Peak
5460.000	34.60	9.05	34.21	48.85	58.29	74.00	15.71	Peak
@ 5545.000	34.70	9.10	34.23	84.58	94.15	---	---	Peak

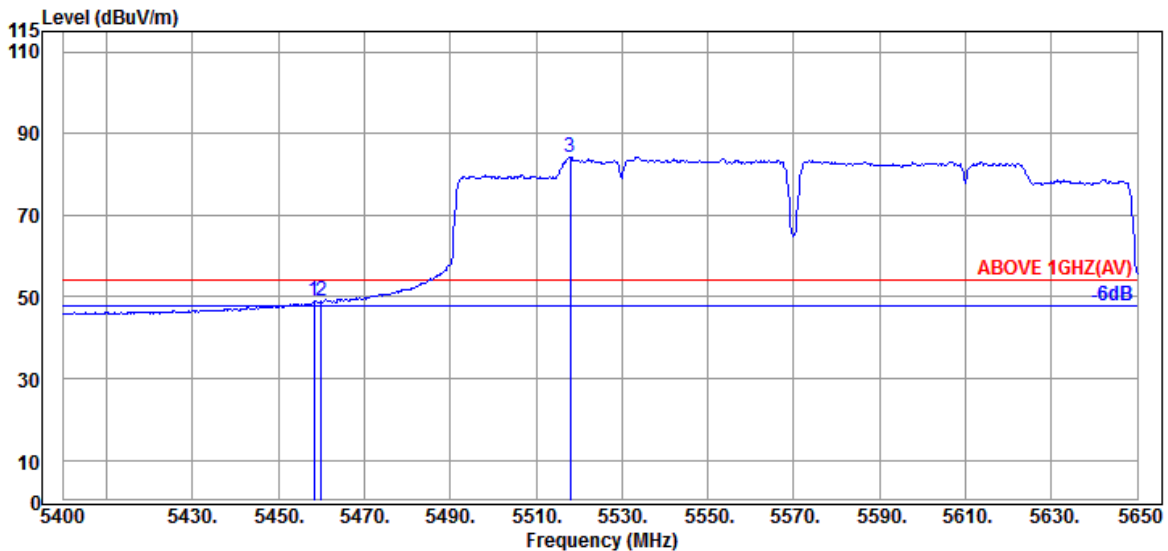


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	39.61	49.05	54.00	4.95	Average
5460.000	34.60	9.05	34.21	39.43	48.87	54.00	5.13	Average
@ 5518.000	34.70	9.09	34.21	74.69	84.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

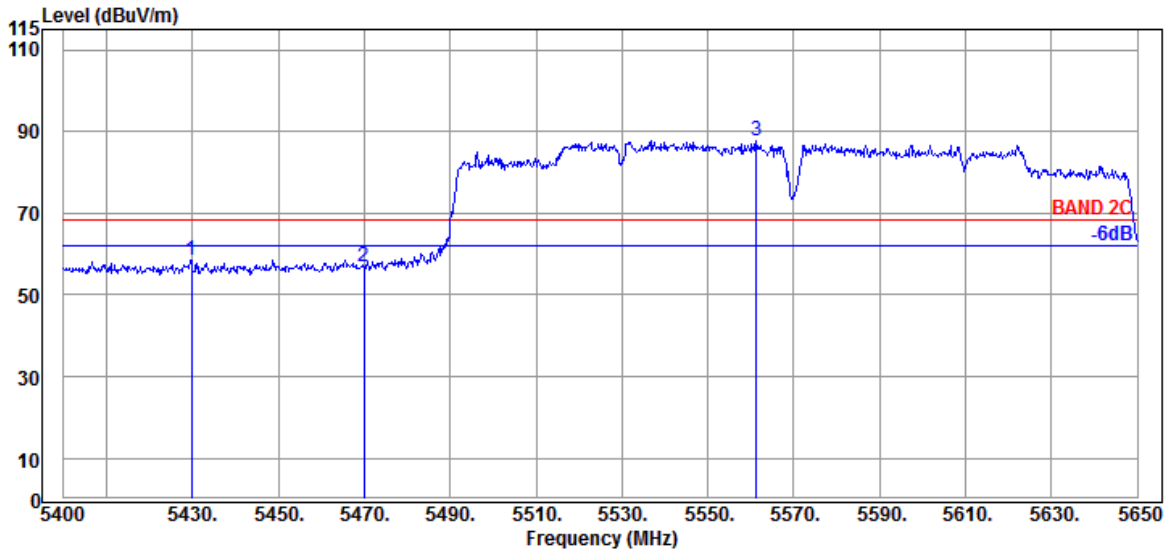

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5429.750	34.70	9.04	34.23	49.15	58.66	68.20	9.54	Peak
5470.000	34.63	9.06	34.21	47.55	57.03	68.20	11.17	Peak
5561.250	34.60	9.11	34.23	78.45	87.93	---	---	Peak

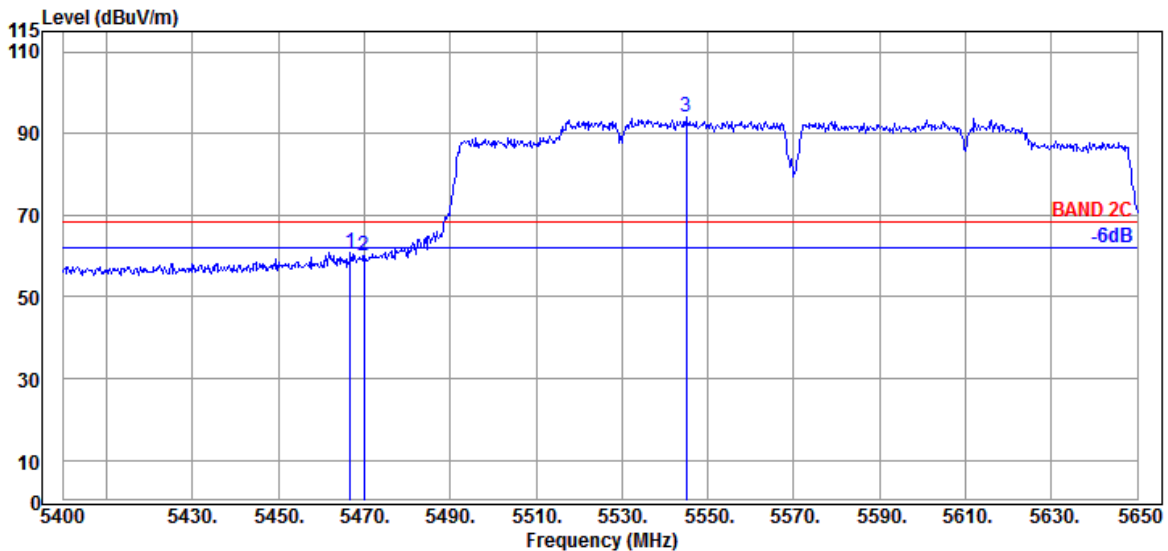


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5466.750	34.63	9.06	34.21	51.47	60.95	68.20	7.25	Peak
5470.000	34.63	9.06	34.21	50.47	59.95	68.20	8.25	Peak
5545.000	34.70	9.10	34.23	84.58	94.15	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

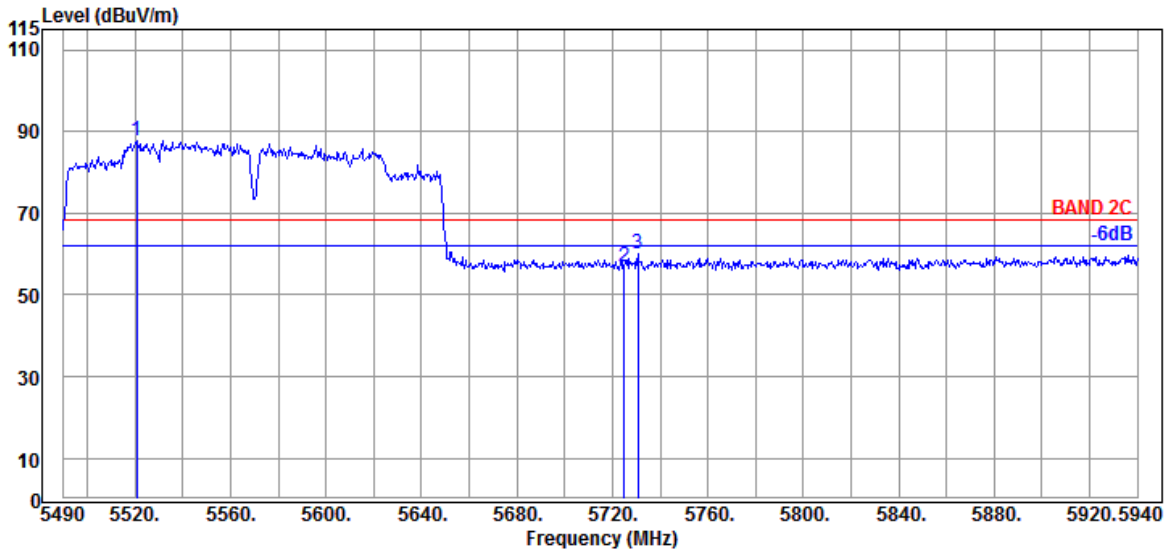

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.600	34.70	9.09	34.21	78.28	87.86	---	---	Peak
5724.900	34.90	9.20	34.30	47.11	56.91	68.20	11.29	Peak
5730.750	34.90	9.20	34.31	50.22	60.01	68.20	8.19	Peak

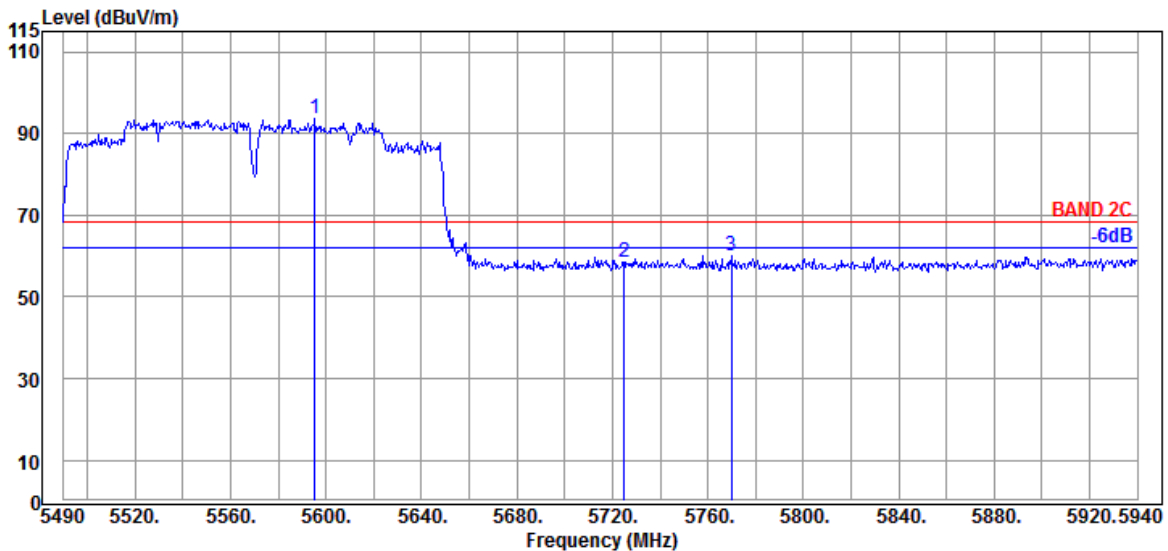


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.300	34.40	9.13	34.24	84.39	93.68	---	---	Peak
5724.900	34.90	9.20	34.30	48.60	58.40	68.20	9.80	Peak
5769.900	35.03	9.21	34.33	50.05	59.96	68.20	8.24	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

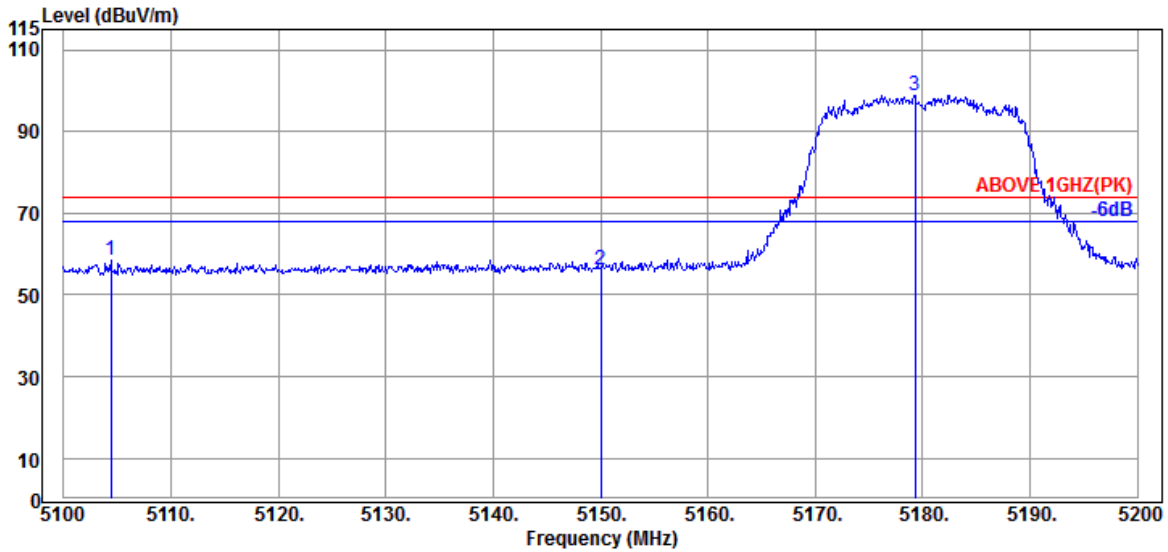

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.400	34.20	8.86	34.36	49.76	58.46	74.00	15.54	Peak
5150.000	34.50	8.88	34.34	47.20	56.24	74.00	17.76	Peak
@ 5179.300	34.63	8.90	34.32	89.56	98.77	---	---	Peak

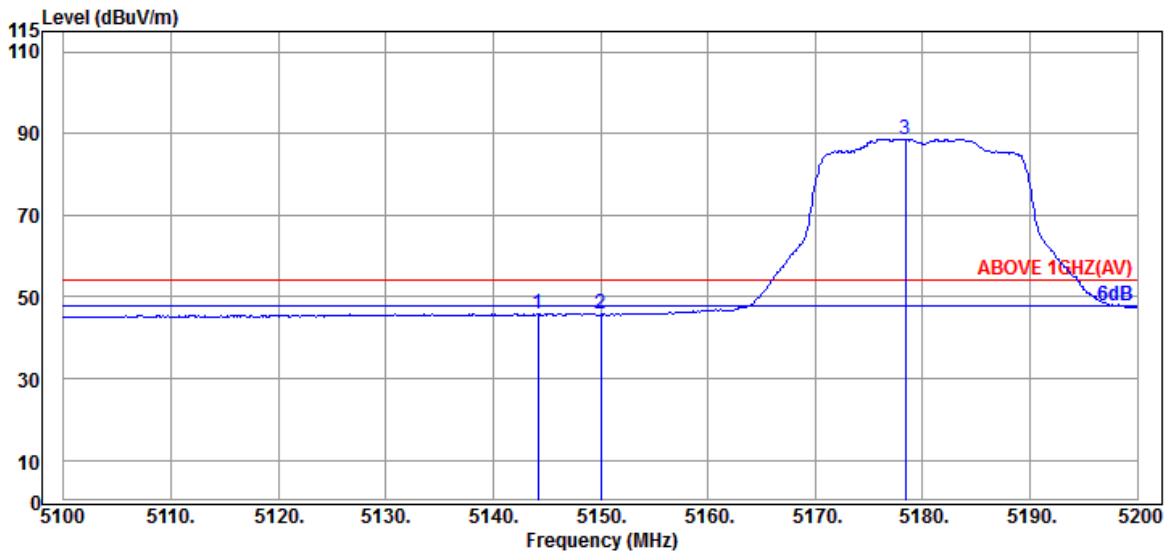


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	34.50	8.88	34.34	36.84	45.88	54.00	8.12	Peak
5150.000	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Peak
@ 5178.400	34.63	8.90	34.32	79.45	88.66	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

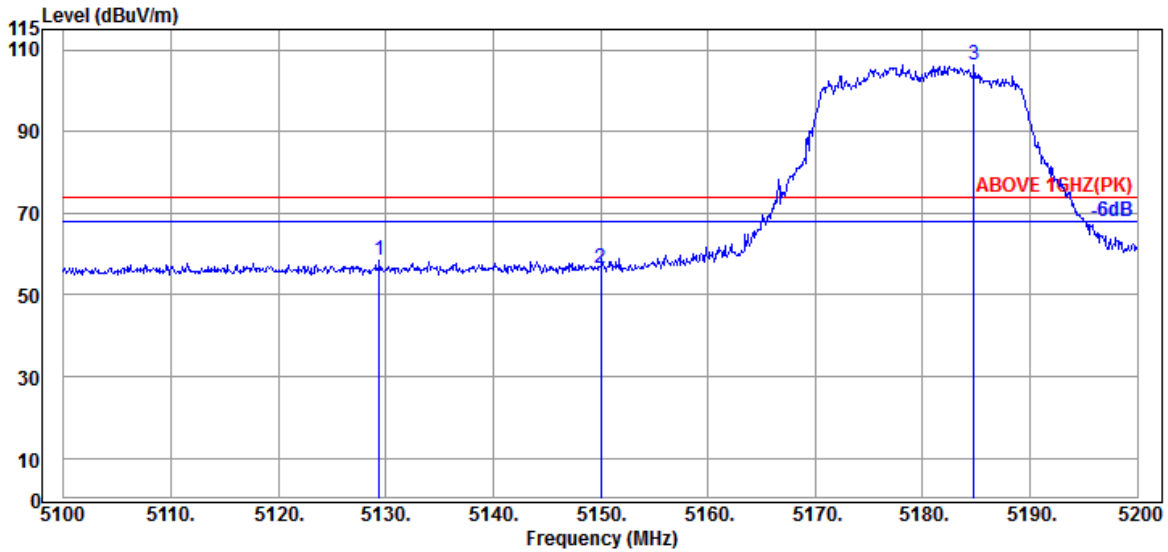

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.400	34.40	8.88	34.34	49.45	58.39	74.00	15.61	Peak
5150.000	34.50	8.88	34.34	47.37	56.41	74.00	17.59	Peak
@ 5184.800	34.63	8.90	34.32	96.98	106.19	---	---	Peak

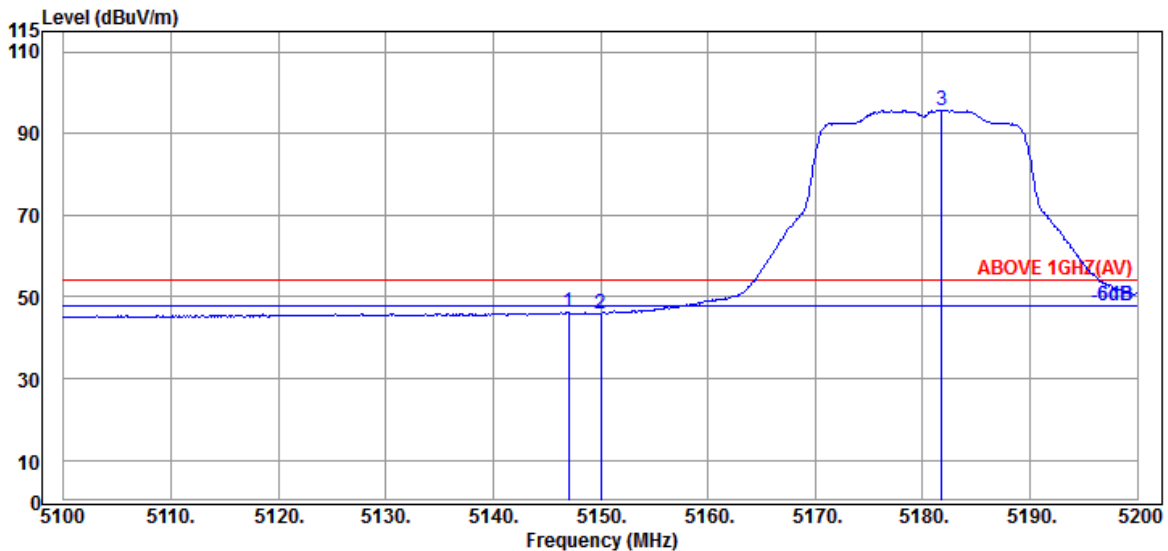

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	34.50	8.88	34.34	37.20	46.24	54.00	7.76	Average
5150.000	34.50	8.88	34.34	36.96	46.00	54.00	8.00	Average
@ 5181.800	34.63	8.90	34.32	86.55	95.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

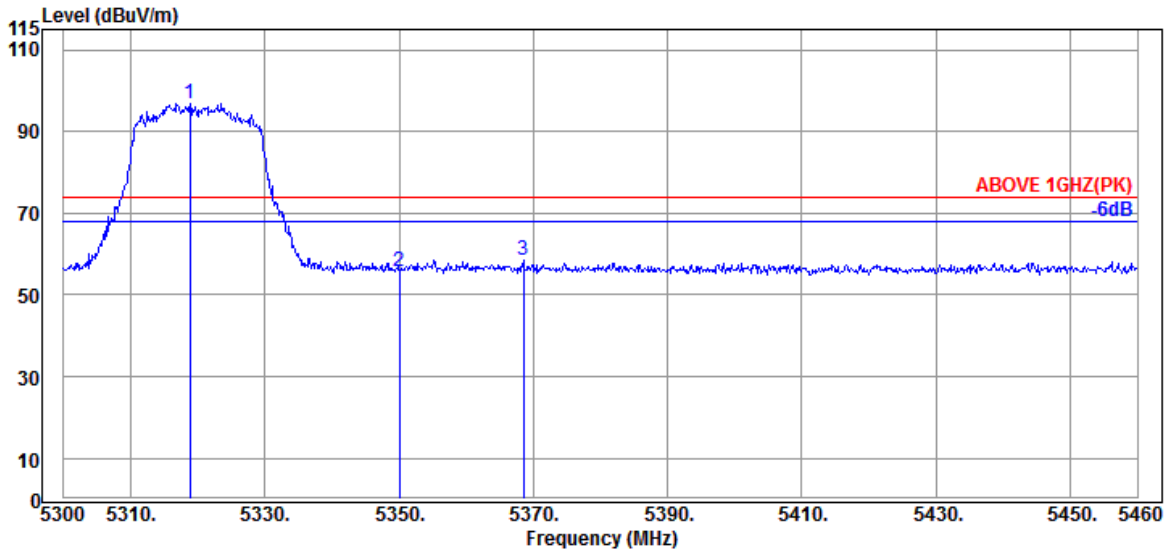

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.880	34.57	8.98	34.27	87.61	96.89	---	---	Peak
5350.080	34.90	8.99	34.26	46.25	55.88	74.00	18.12	Peak
5368.480	34.87	9.00	34.25	48.93	58.55	74.00	15.45	Peak

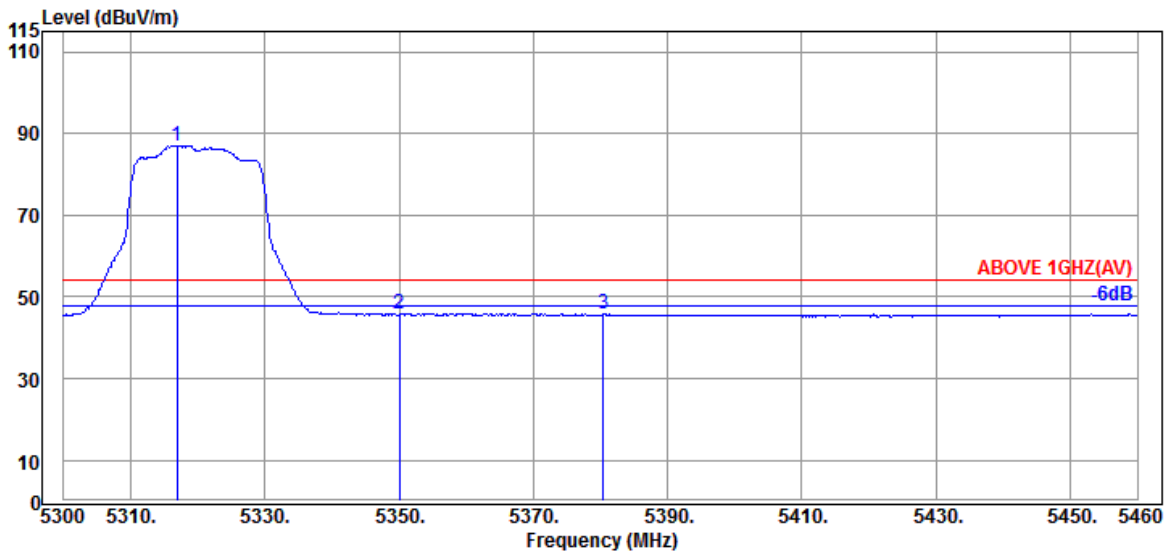


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.57	8.98	34.27	77.74	87.02	---	---	Average
5350.080	34.90	8.99	34.26	36.03	45.66	54.00	8.34	Average
5380.480	34.83	9.01	34.25	36.40	45.99	54.00	8.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

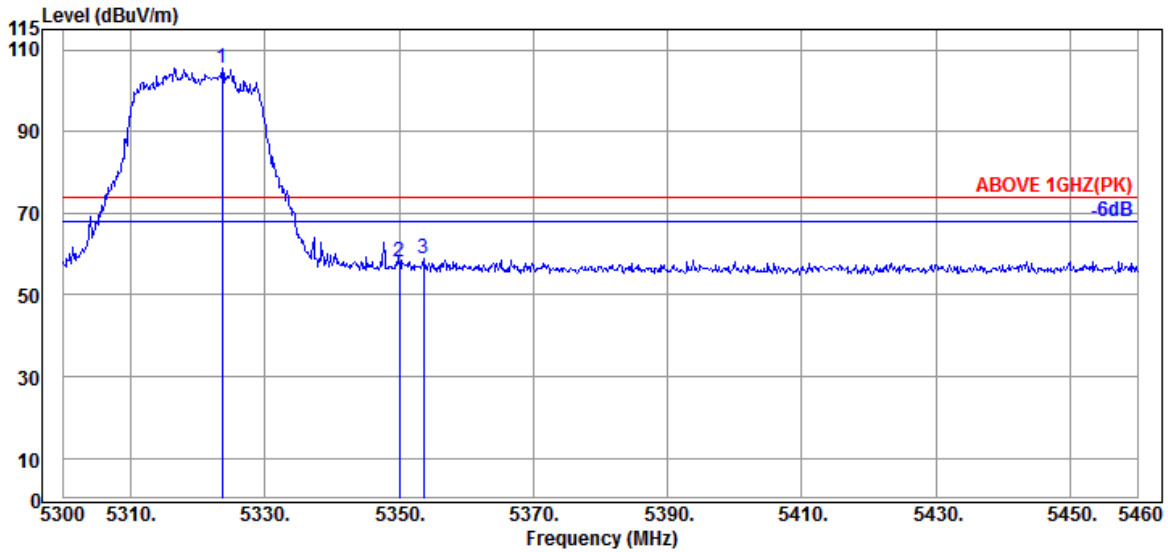

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.73	8.99	34.27	96.22	105.67	---	---	Peak
5350.080	34.90	8.99	34.26	48.46	58.09	74.00	15.91	Peak
5353.600	34.90	8.99	34.26	49.15	58.78	74.00	15.22	Peak

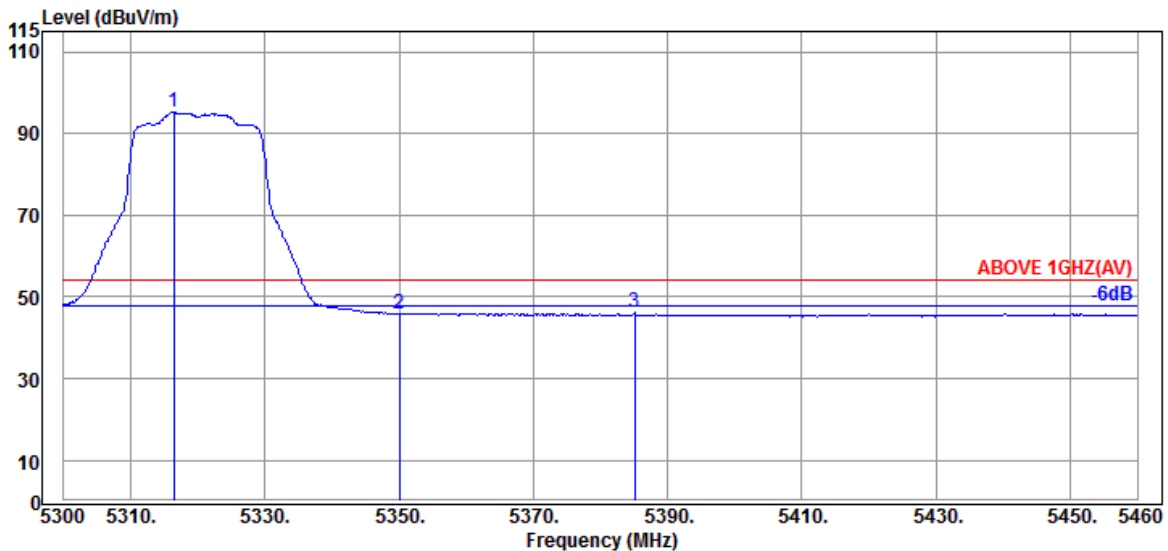


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.57	8.98	34.27	85.89	95.17	---	---	Average
5350.080	34.90	8.99	34.26	36.22	45.85	54.00	8.15	Average
5385.120	34.83	9.01	34.24	36.46	46.06	54.00	7.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

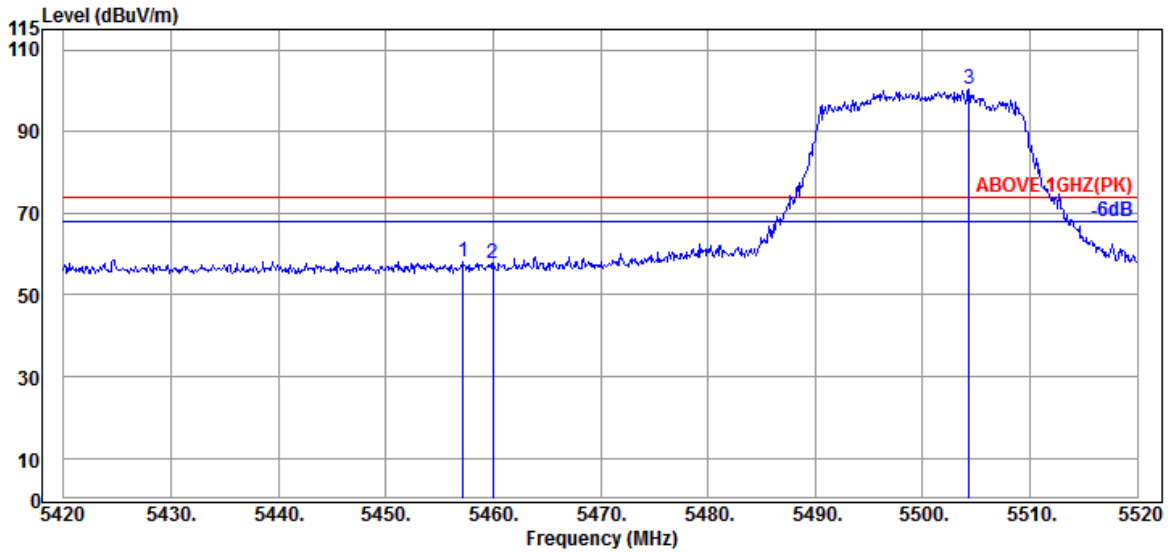

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.200	34.60	9.05	34.21	48.73	58.17	74.00	15.83	Peak
5460.000	34.60	9.05	34.21	48.11	57.55	74.00	16.45	Peak
@ 5504.300	34.70	9.08	34.20	90.74	100.32	---	---	Peak

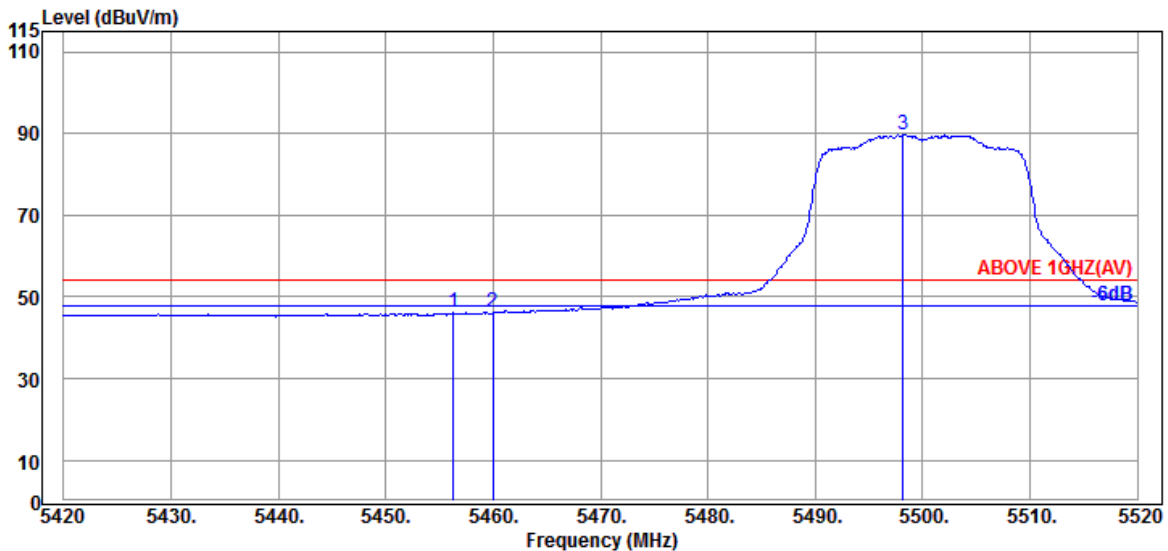


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.300	34.60	9.05	34.21	36.75	46.19	54.00	7.81	Average
5460.000	34.60	9.05	34.21	36.62	46.06	54.00	7.94	Average
@ 5498.200	34.70	9.08	34.20	80.04	89.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

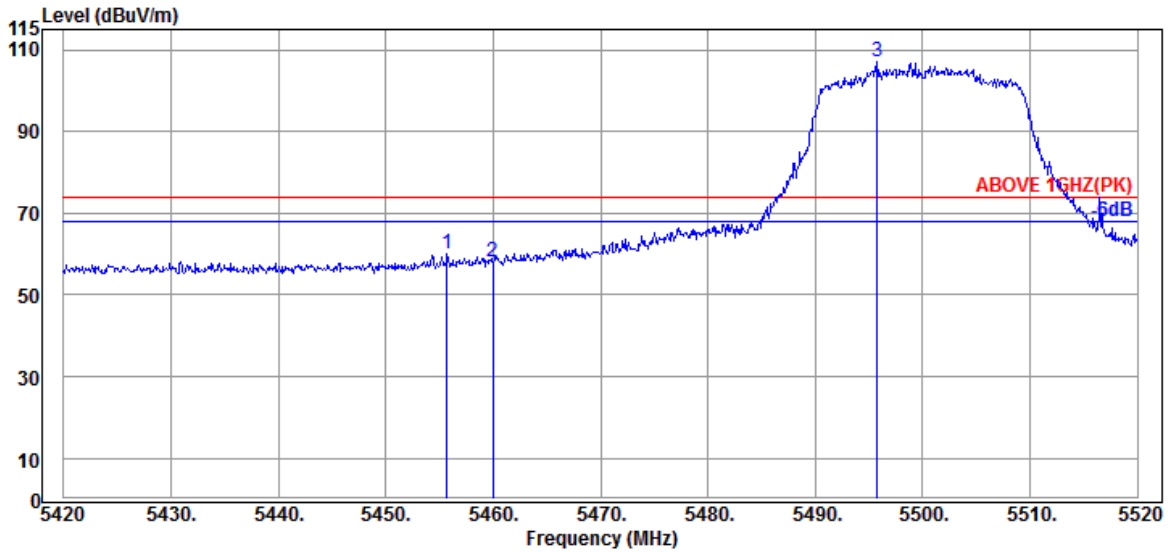

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.700	34.60	9.05	34.21	50.50	59.94	74.00	14.06	Peak
5460.000	34.60	9.05	34.21	48.81	58.25	74.00	15.75	Peak
@ 5495.800	34.70	9.08	34.20	97.37	106.95	---	---	Peak

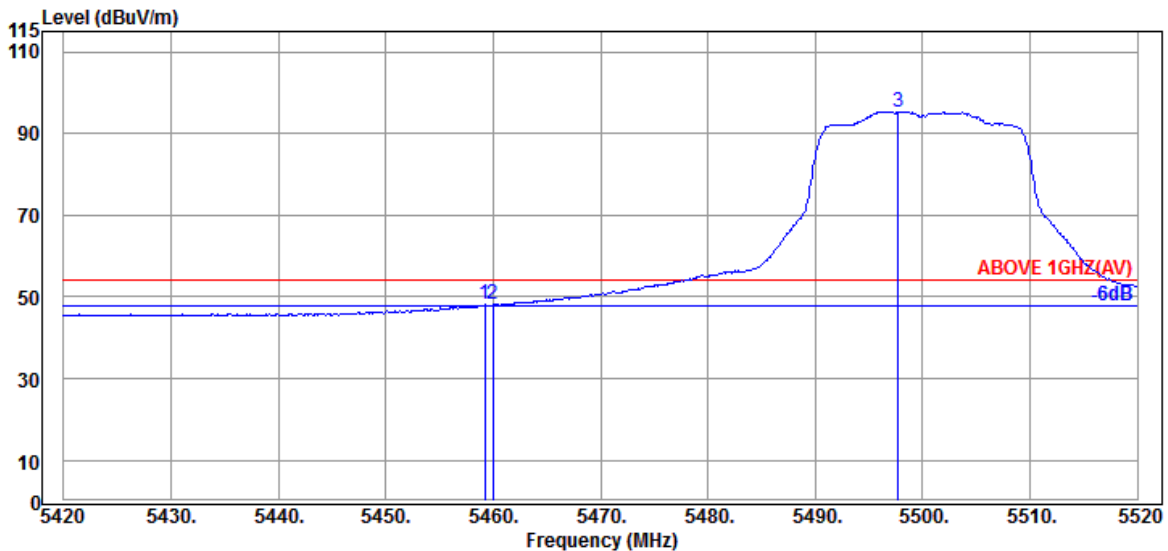


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.200	34.60	9.05	34.21	38.69	48.13	54.00	5.87	Average
5460.000	34.60	9.05	34.21	38.63	48.07	54.00	5.93	Average
@ 5497.700	34.70	9.08	34.20	85.78	95.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

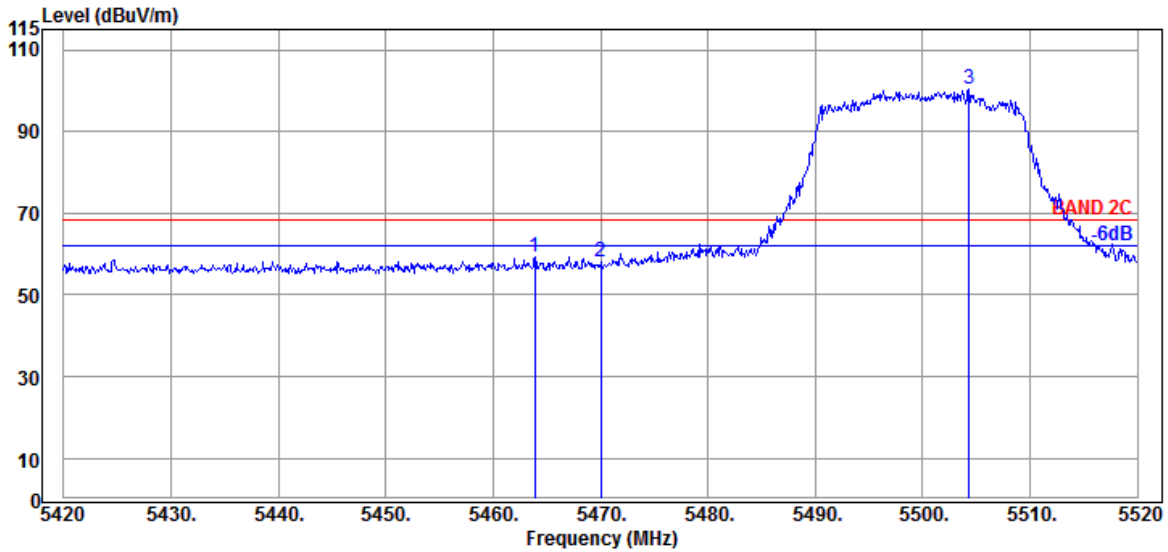

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5463.900	34.63	9.06	34.21	49.94	59.42	68.20	8.78	Peak
	5470.000	34.63	9.06	34.21	48.70	58.18	68.20	10.02	Peak
	5504.300	34.70	9.08	34.20	90.74	100.32	---	---	Peak

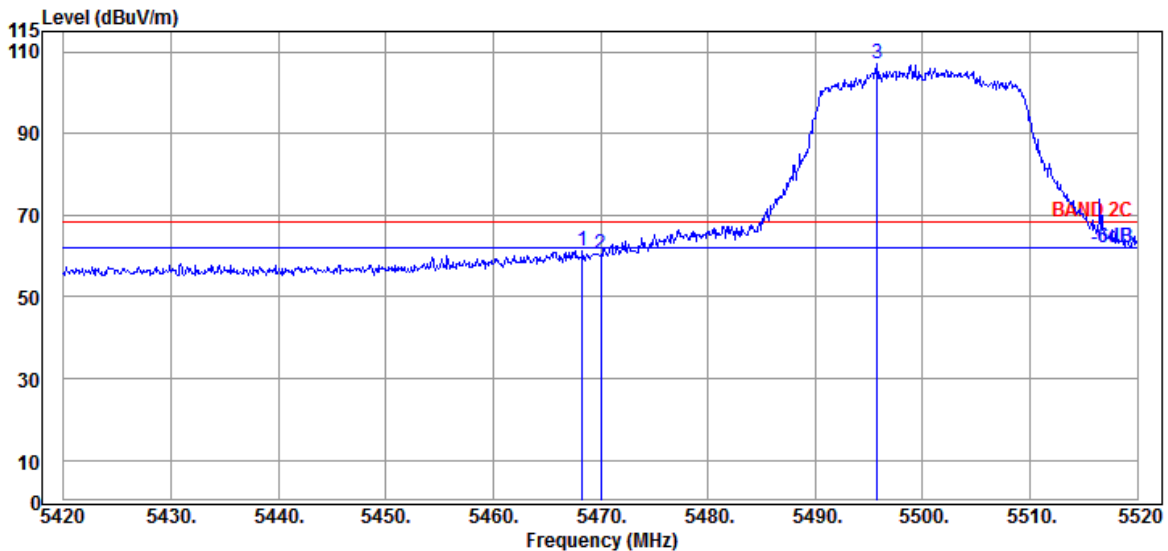


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.300	34.63	9.06	34.21	51.86	61.34	68.20	6.86	Peak
	5470.000	34.63	9.06	34.21	50.91	60.39	68.20	7.81	Peak
	5495.800	34.70	9.08	34.20	97.37	106.95	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

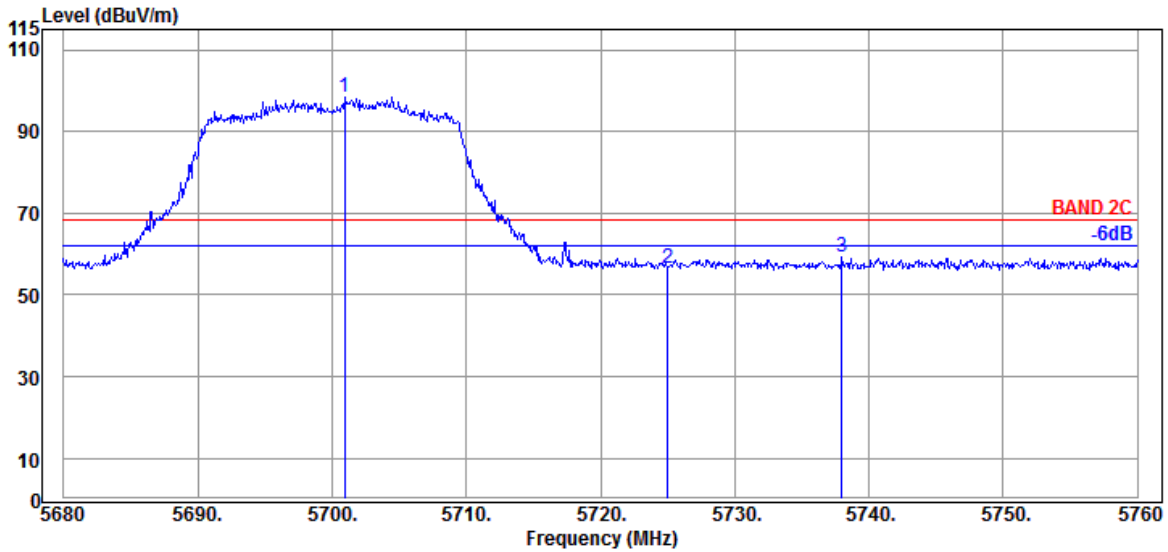

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	34.70	9.18	34.29	88.63	98.22	---	---	Peak
5725.040	34.90	9.20	34.30	46.71	56.51	68.20	11.69	Peak
5738.000	34.90	9.20	34.31	49.54	59.33	68.20	8.87	Peak

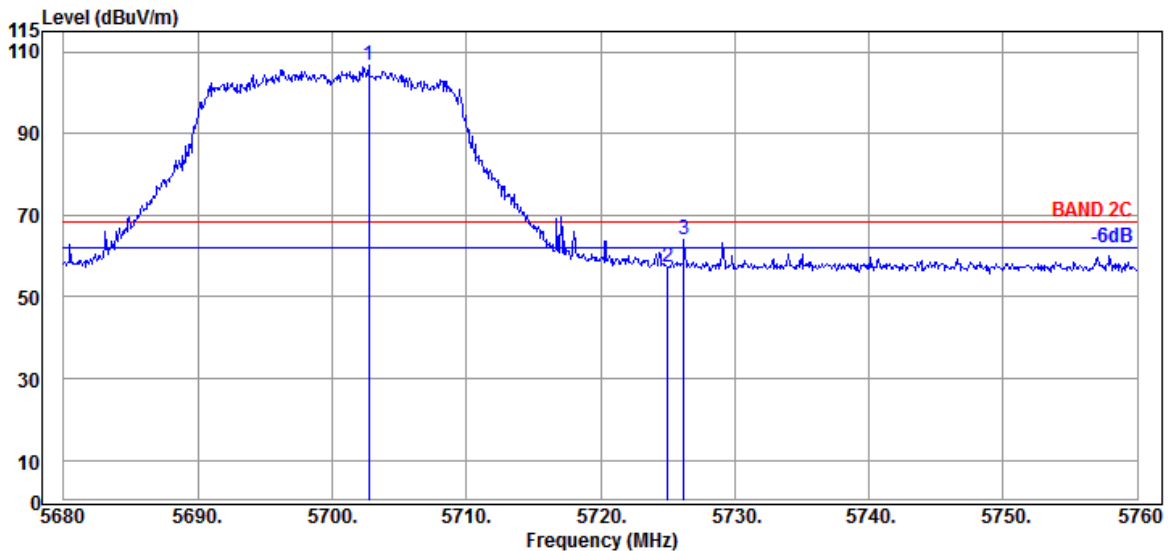


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.720	34.70	9.18	34.29	97.15	106.74	---	---	Peak
5725.040	34.90	9.20	34.30	47.63	57.43	68.20	10.77	Peak
5726.240	34.90	9.20	34.30	54.26	64.06	68.20	4.14	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

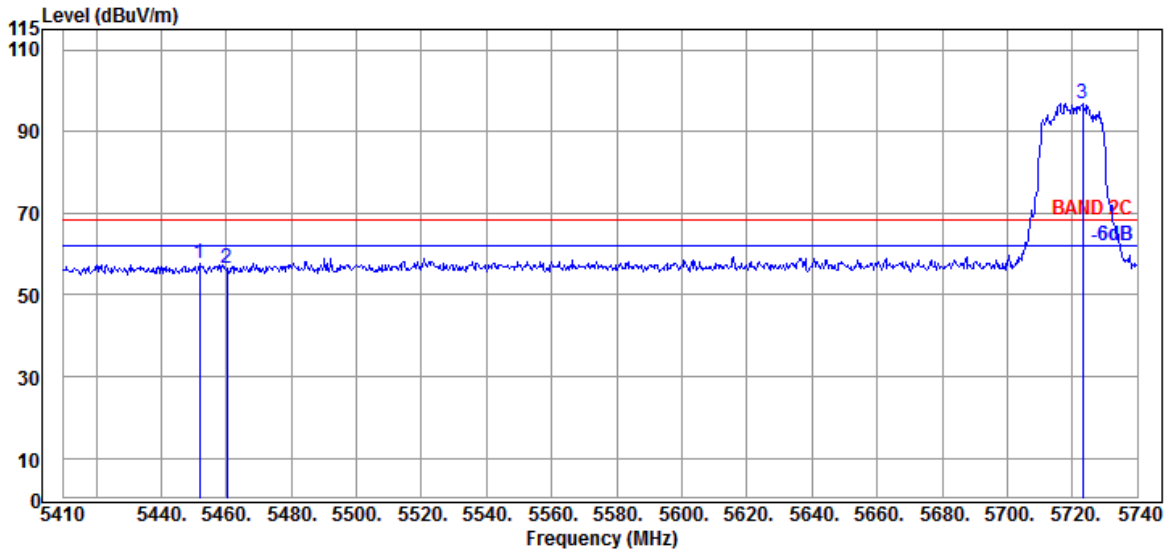

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5451.910	34.60	9.05	34.21	48.10	57.54	68.20	10.66	Peak
5460.160	34.60	9.05	34.21	46.90	56.34	68.20	11.86	Peak
5723.170	34.90	9.20	34.30	87.14	96.94	---	---	Peak

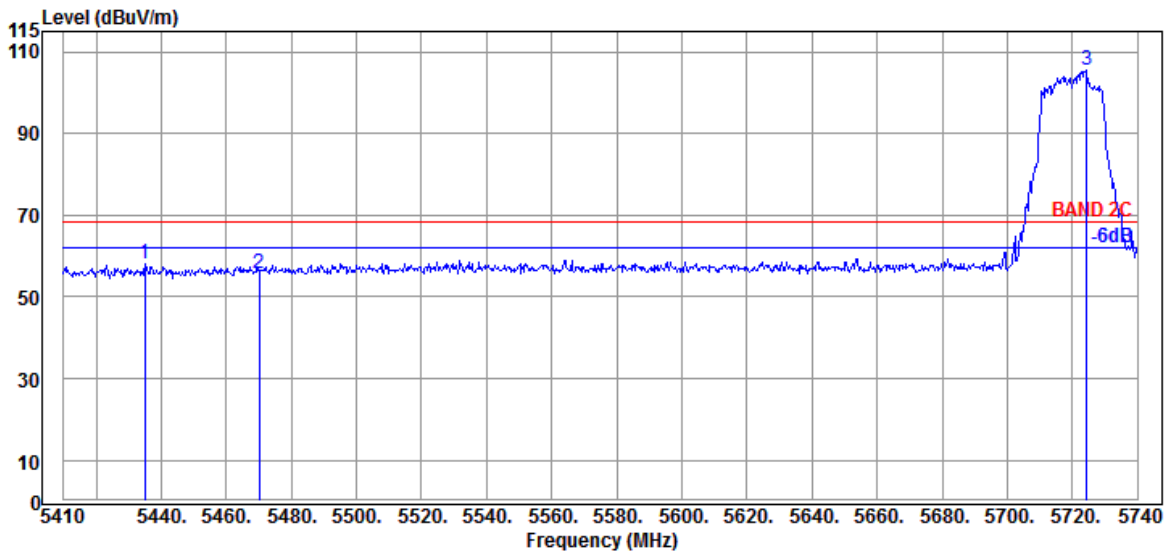


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5435.080	34.65	9.04	34.22	48.75	58.22	68.20	9.98	Peak
5470.060	34.63	9.06	34.21	46.30	55.78	68.20	12.42	Peak
5724.490	34.90	9.20	34.30	95.86	105.66	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

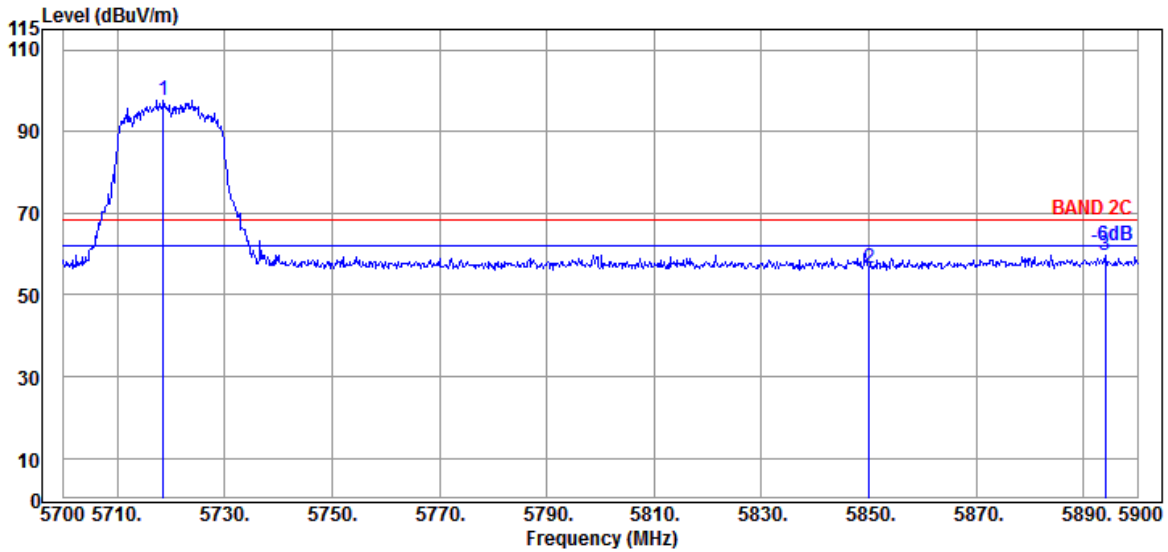

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.600	34.80	9.19	34.30	87.97	97.66	---	---	Peak
5850.000	35.40	9.25	34.36	46.14	56.43	68.20	11.77	Peak
5894.000	35.80	9.28	34.38	48.84	59.54	68.20	8.66	Peak

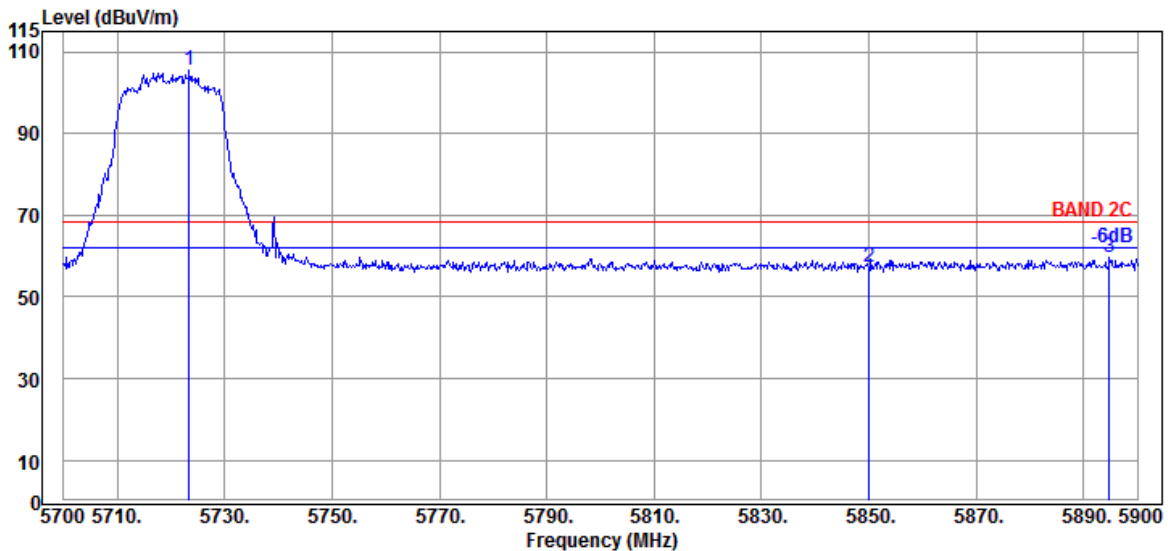


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.400	34.90	9.20	34.30	95.77	105.57	---	---	Peak
5850.000	35.40	9.25	34.36	46.99	57.28	68.20	10.92	Peak
5894.800	35.80	9.28	34.38	48.91	59.61	68.20	8.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

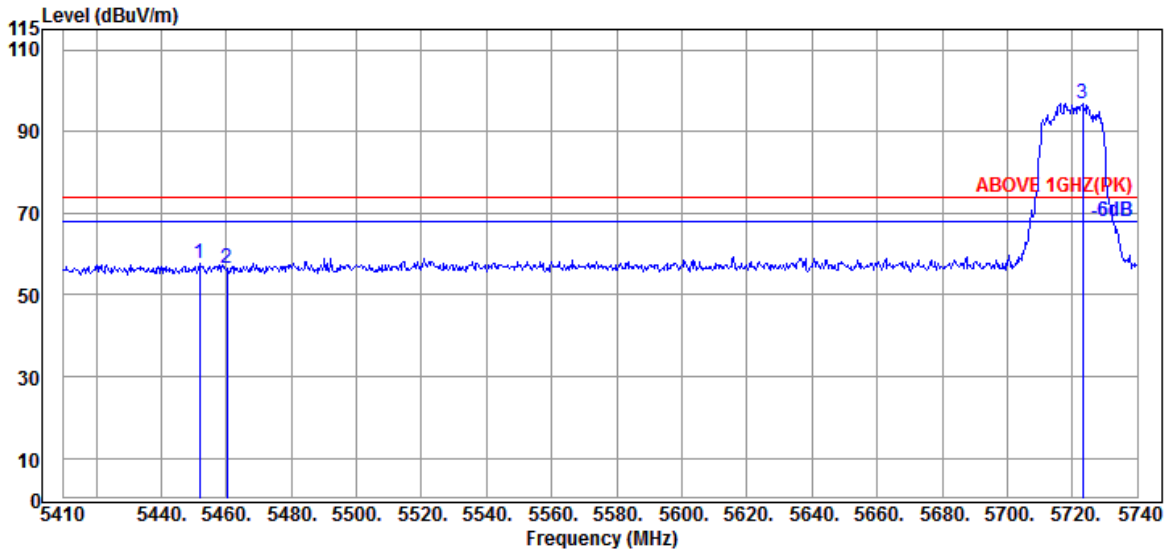

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.910	34.60	9.05	34.21	48.10	57.54	74.00	16.46	Peak
5460.160	34.60	9.05	34.21	46.90	56.34	74.00	17.66	Peak
@ 5723.170	34.90	9.20	34.30	87.14	96.94	---	---	Peak

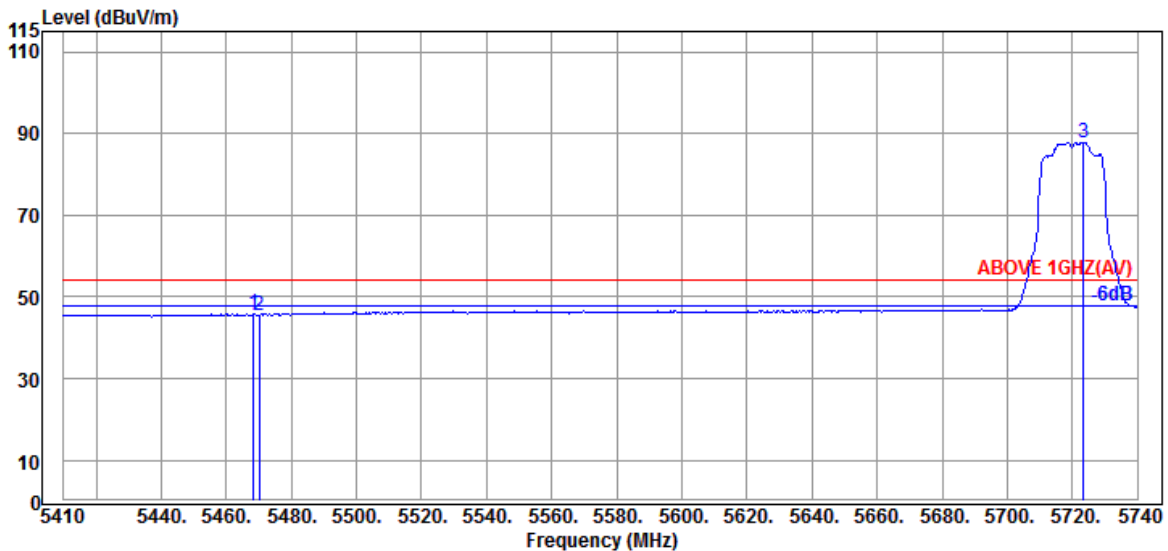


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.63	9.06	34.21	36.32	45.80	54.00	8.20	Average
5470.060	34.63	9.06	34.21	36.16	45.64	54.00	8.36	Average
@ 5723.500	34.90	9.20	34.30	78.07	87.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

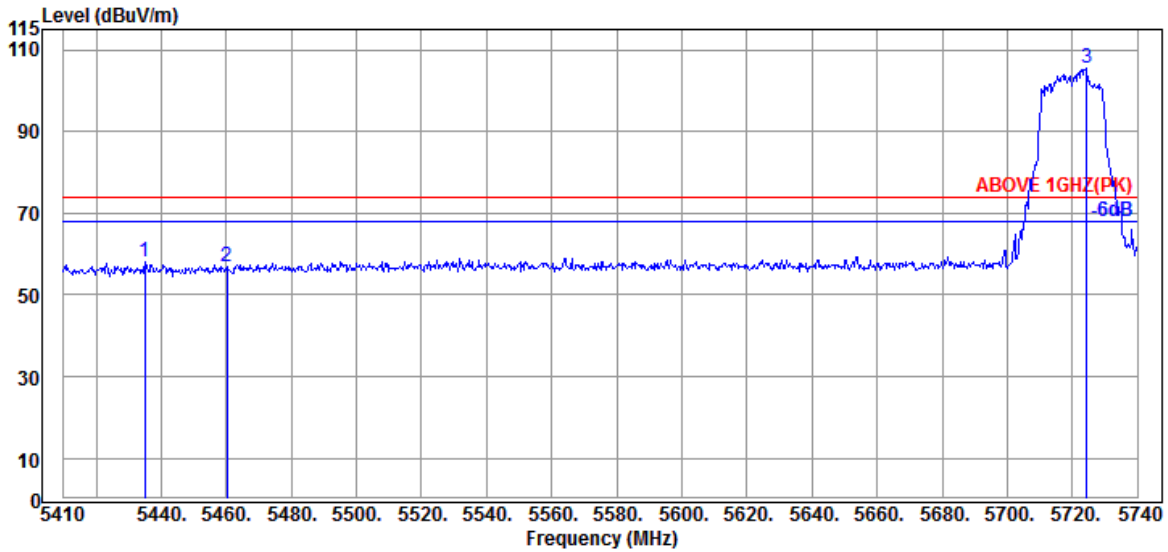

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.080	34.65	9.04	34.22	48.75	58.22	74.00	15.78	Peak
5460.160	34.60	9.05	34.21	47.57	57.01	74.00	16.99	Peak
@ 5724.490	34.90	9.20	34.30	95.86	105.66	---	---	Peak

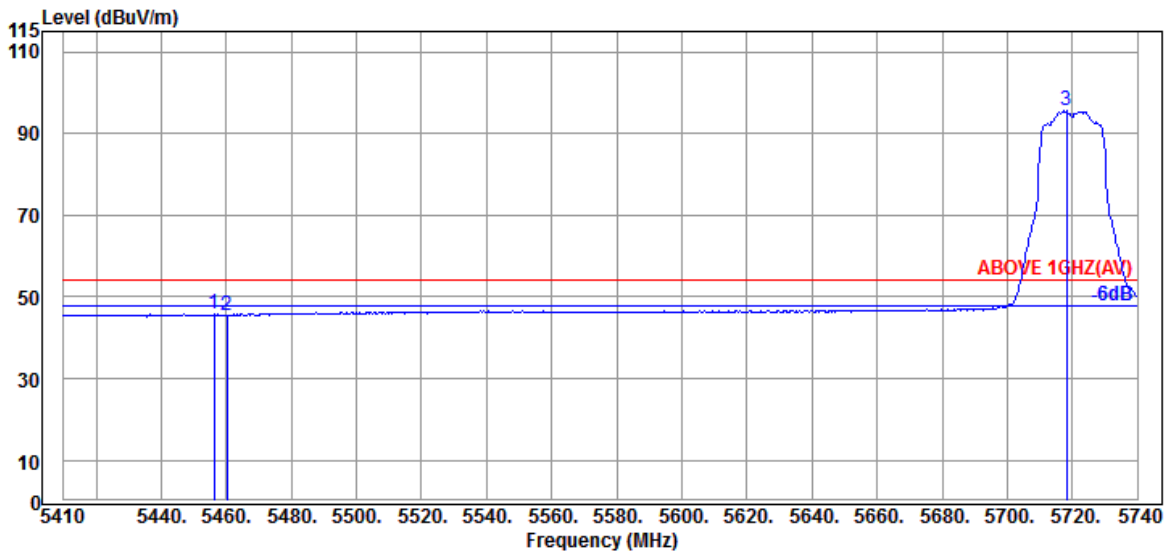


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.60	9.05	34.21	36.41	45.85	54.00	8.15	Average
5460.160	34.60	9.05	34.21	36.15	45.59	54.00	8.41	Average
@ 5718.220	34.80	9.19	34.30	85.85	95.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

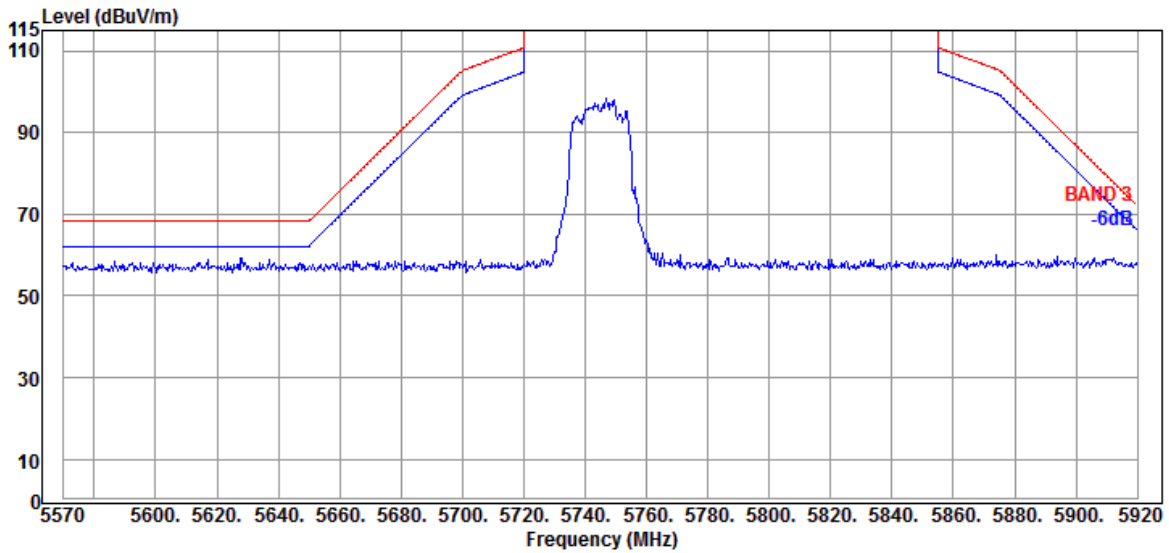


Antenna at Vertical Polarization

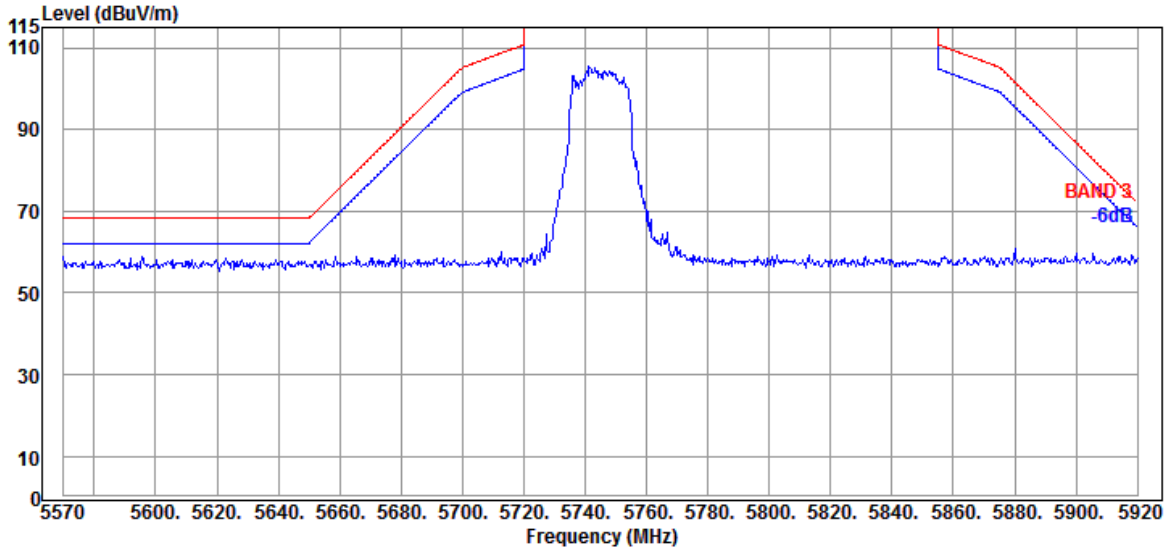


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

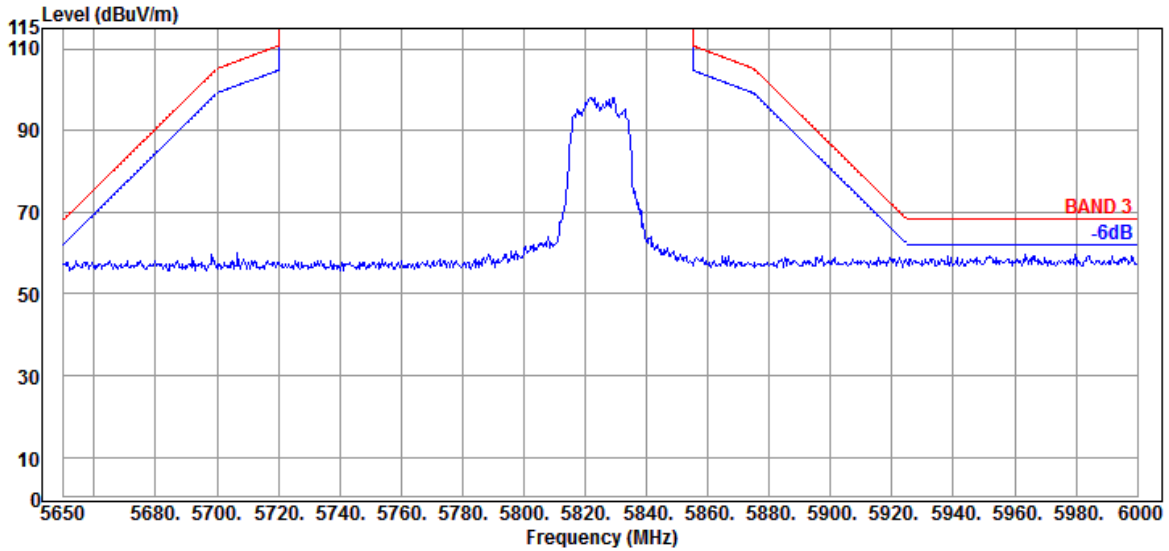

Antenna at Vertical Polarization

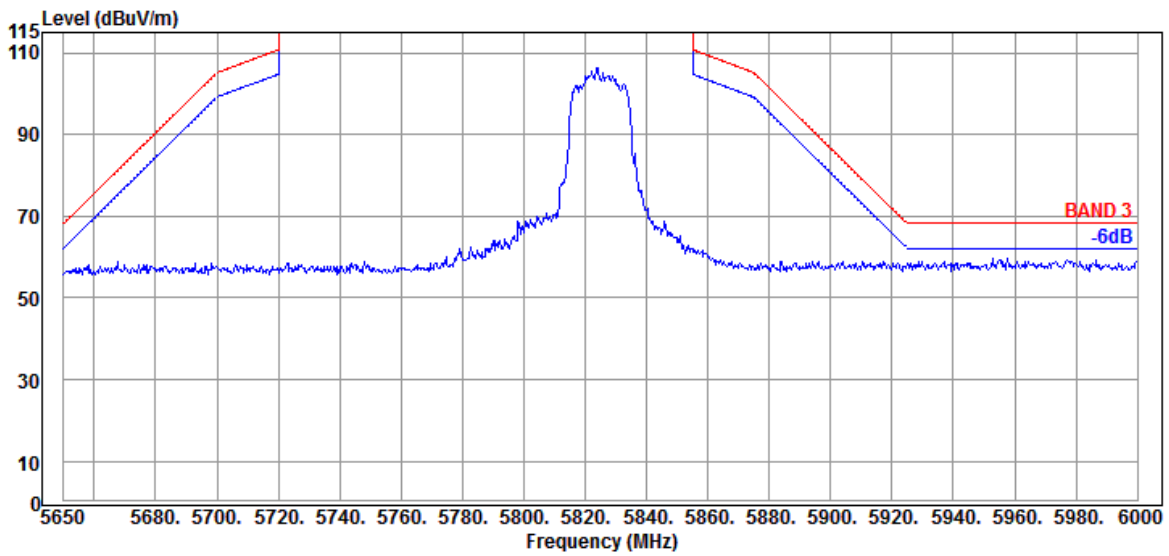


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

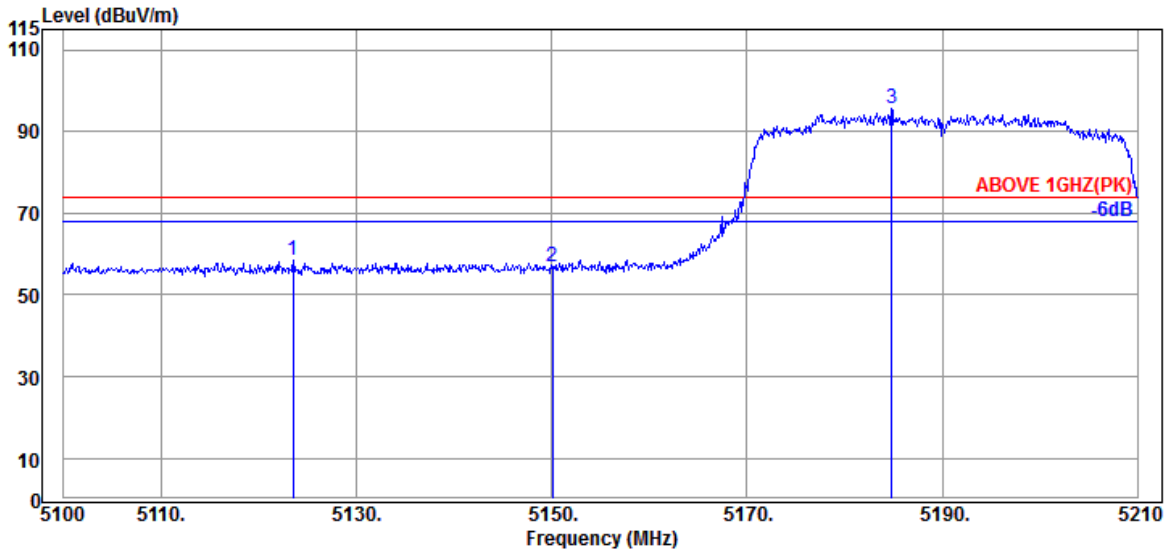

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.540	34.30	8.87	34.34	49.54	58.37	74.00	15.63	Peak
5150.050	34.50	8.88	34.34	47.75	56.79	74.00	17.21	Peak
@ 5184.810	34.63	8.90	34.32	86.35	95.56	---	---	Peak

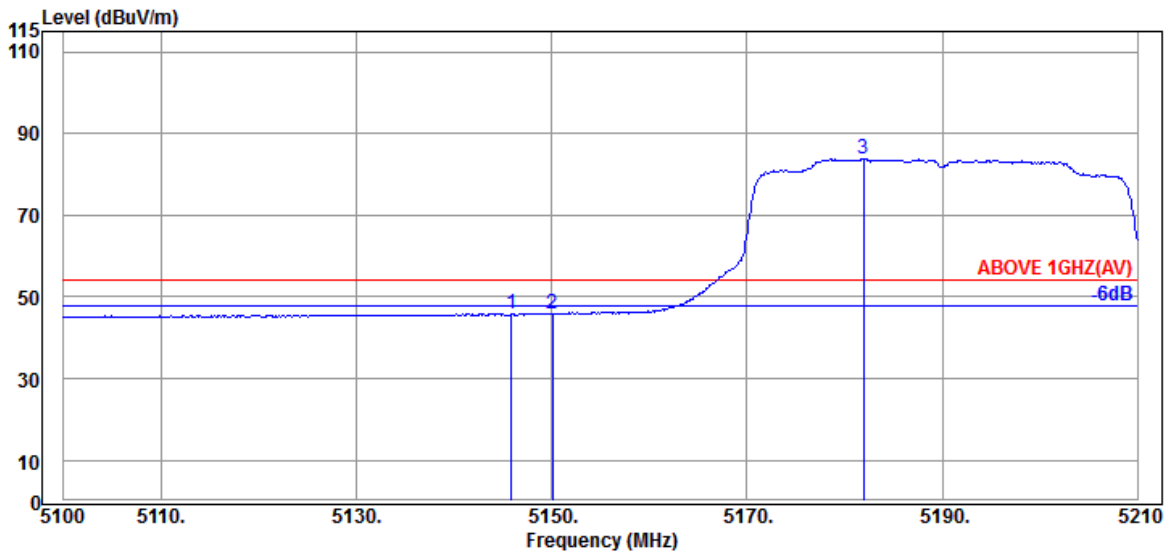


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.870	34.50	8.88	34.34	36.95	45.99	54.00	8.01	Average
5150.050	34.50	8.88	34.34	36.86	45.90	54.00	8.10	Average
@ 5181.950	34.63	8.90	34.32	74.67	83.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

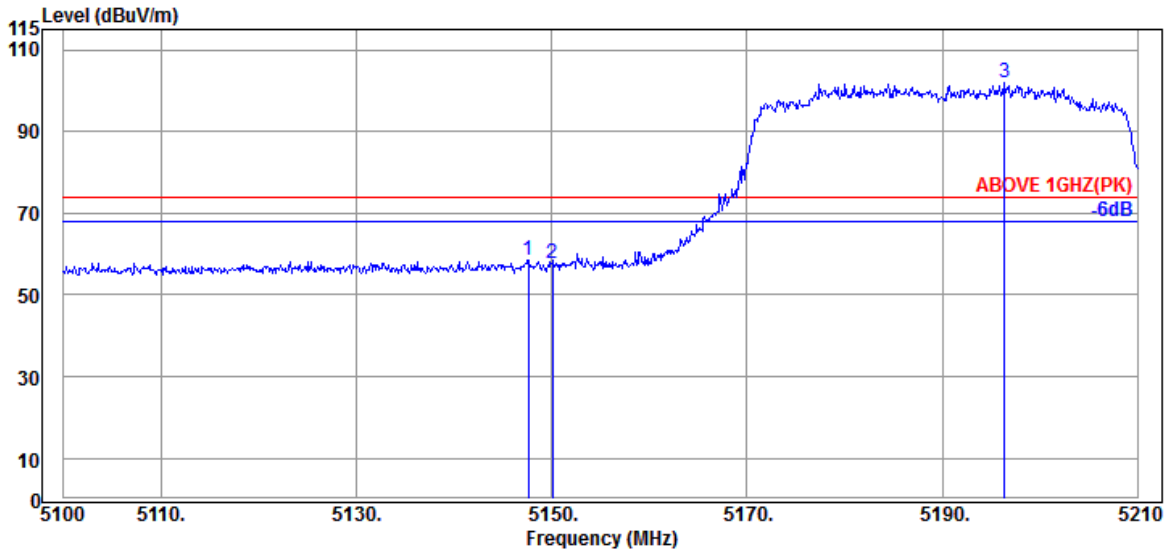

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.630	34.50	8.88	34.34	49.56	58.60	74.00	15.40	Peak
5150.050	34.50	8.88	34.34	48.65	57.69	74.00	16.31	Peak
@ 5196.360	34.70	8.91	34.32	92.74	102.03	---	---	Peak

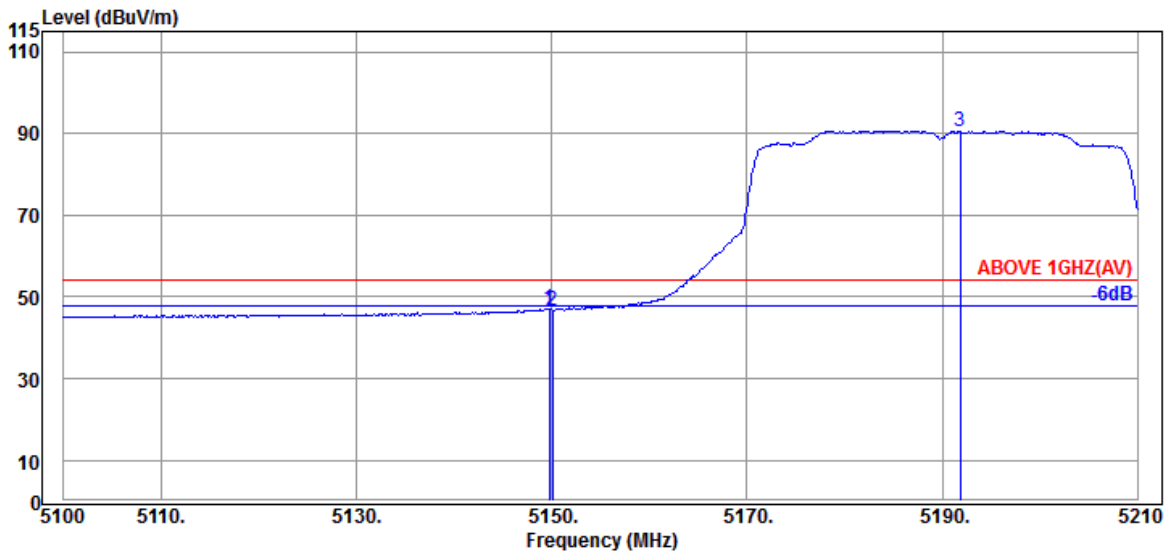


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.50	8.88	34.34	38.05	47.09	54.00	6.91	Average
5150.050	34.50	8.88	34.34	37.70	46.74	54.00	7.26	Average
@ 5191.850	34.70	8.91	34.32	81.30	90.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

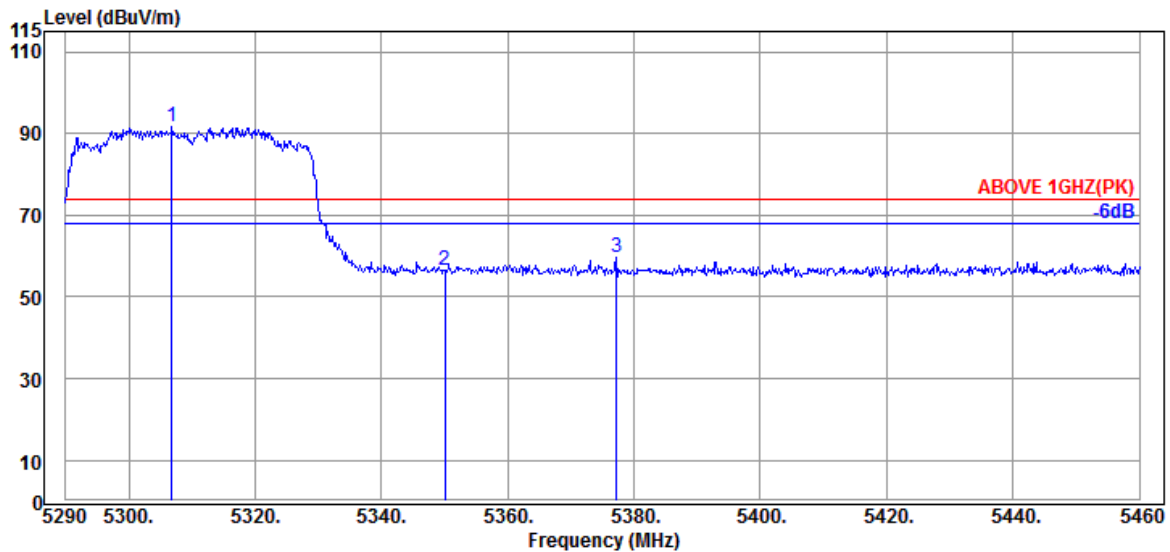

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5306.830	34.40	8.97	34.28	82.76	91.85	---	---	Peak
	5350.010	34.90	8.99	34.26	46.77	56.40	74.00	17.60	Peak
	5377.210	34.83	9.01	34.25	49.91	59.50	74.00	14.50	Peak

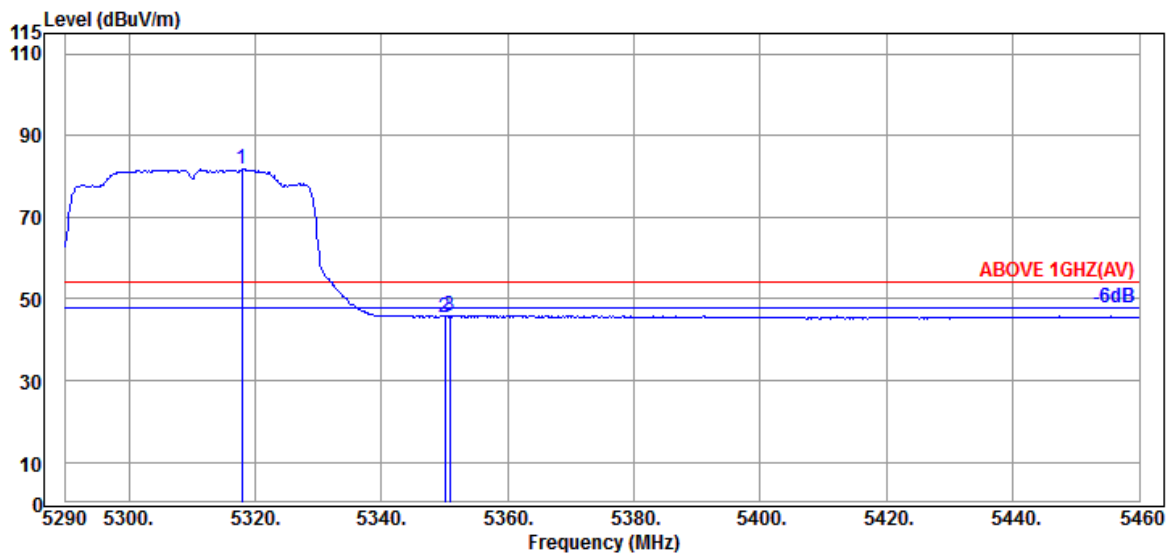


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.880	34.57	8.98	34.27	72.54	81.82	---	---	Average
	5350.010	34.90	8.99	34.26	36.01	45.64	54.00	8.36	Average
	5350.860	34.90	8.99	34.26	36.40	46.03	54.00	7.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

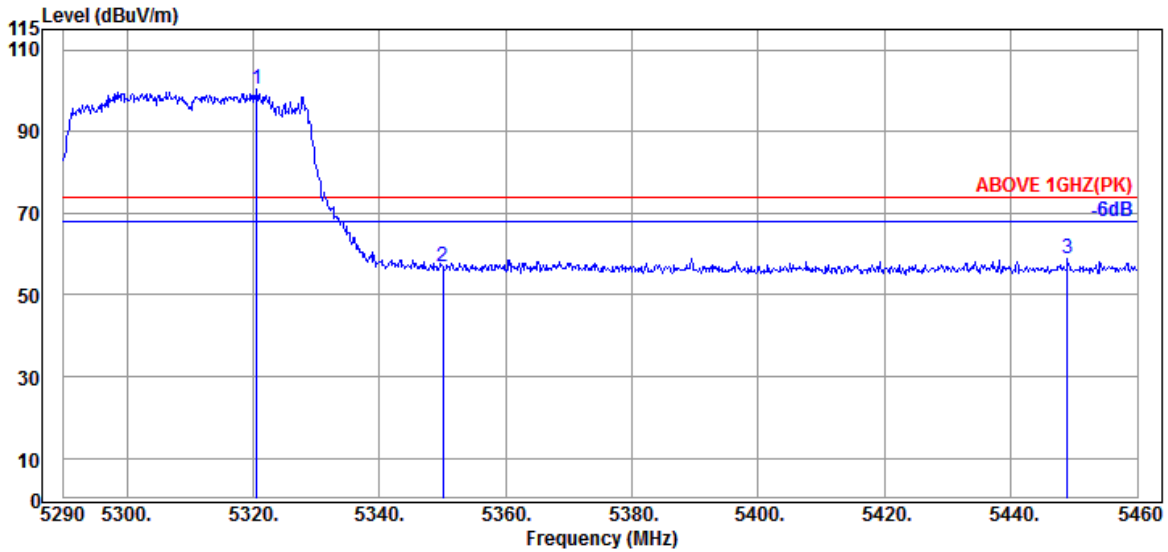

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.600	34.57	8.98	34.27	91.01	100.29	---	---	Peak
5350.010	34.90	8.99	34.26	47.25	56.88	74.00	17.12	Peak
5448.950	34.60	9.05	34.22	49.44	58.87	74.00	15.13	Peak

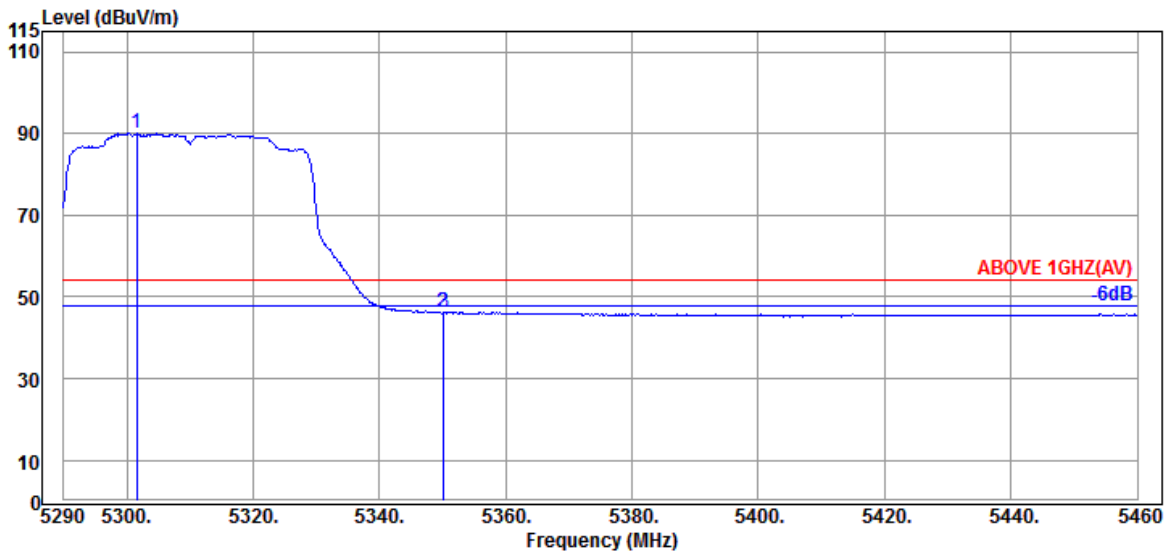


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.560	34.40	8.97	34.28	80.98	90.07	---	---	Average
5350.010	34.90	8.99	34.26	36.67	46.30	54.00	7.70	Average
5350.180	34.90	8.99	34.26	36.75	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

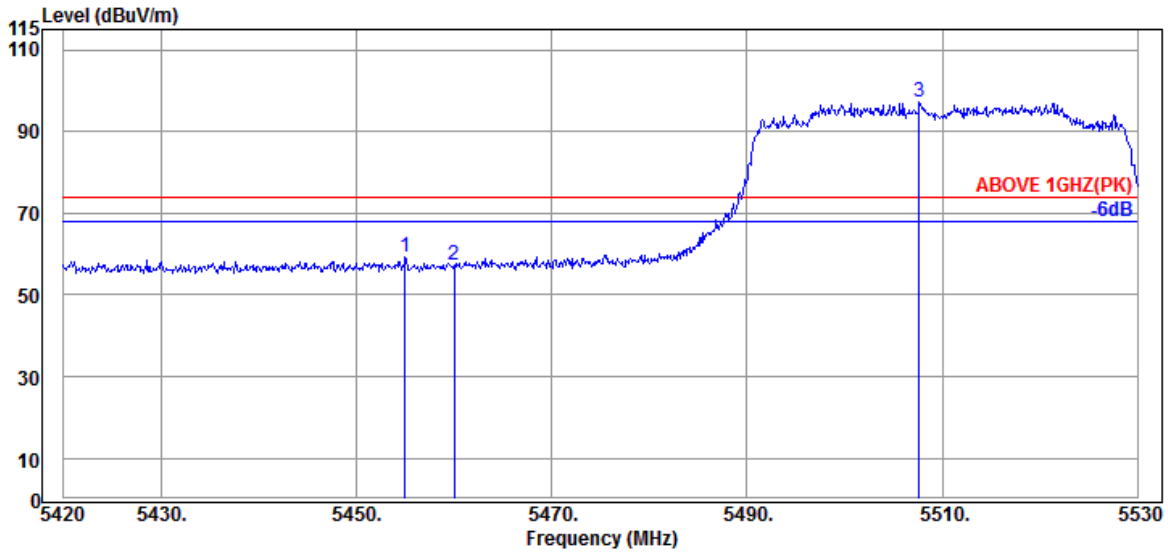

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.980	34.60	9.05	34.21	49.71	59.15	74.00	14.85	Peak
5460.040	34.60	9.05	34.21	47.67	57.11	74.00	16.89	Peak
@ 5507.670	34.70	9.08	34.21	87.71	97.28	---	---	Peak

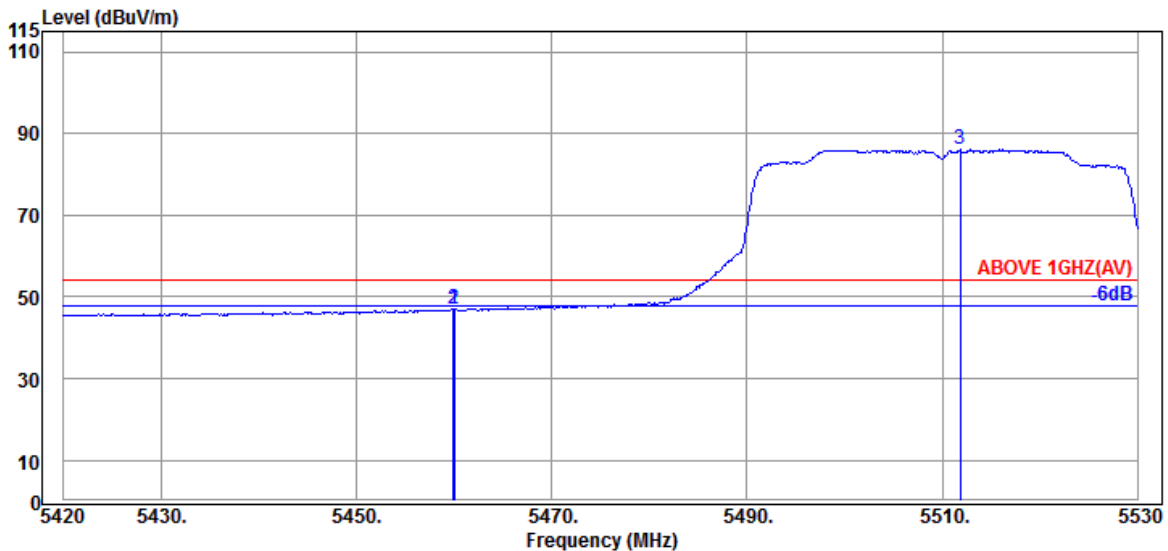


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.930	34.60	9.05	34.21	37.43	46.87	54.00	7.13	Average
5460.040	34.60	9.05	34.21	37.67	47.11	54.00	6.89	Average
@ 5511.850	34.70	9.09	34.21	76.48	86.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

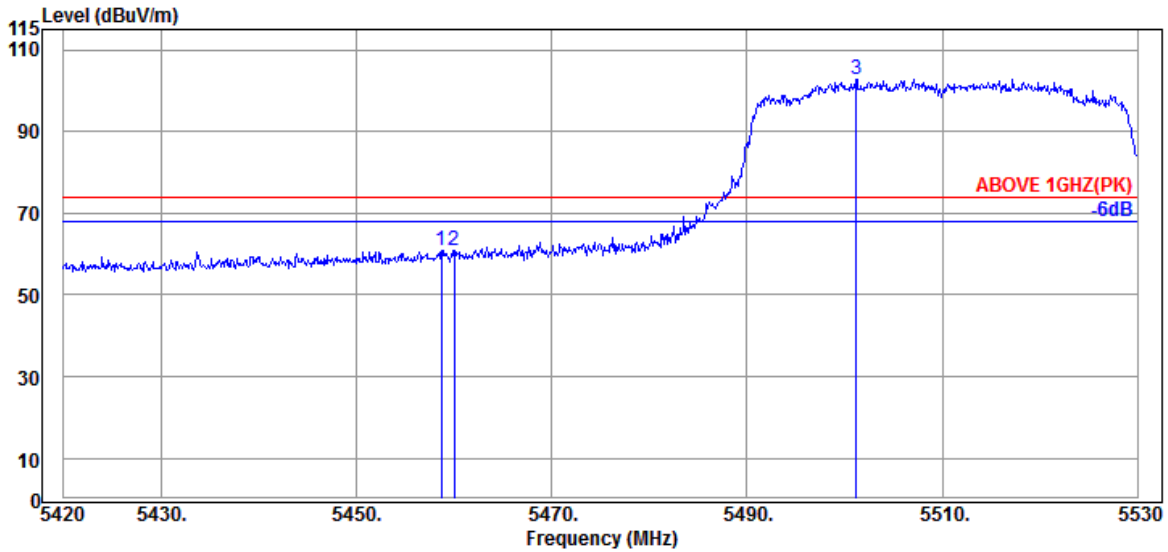

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.60	9.05	34.21	51.31	60.75	74.00	13.25	Peak
5460.040	34.60	9.05	34.21	51.42	60.86	74.00	13.14	Peak
@ 5501.180	34.70	9.08	34.20	93.34	102.92	---	---	Peak

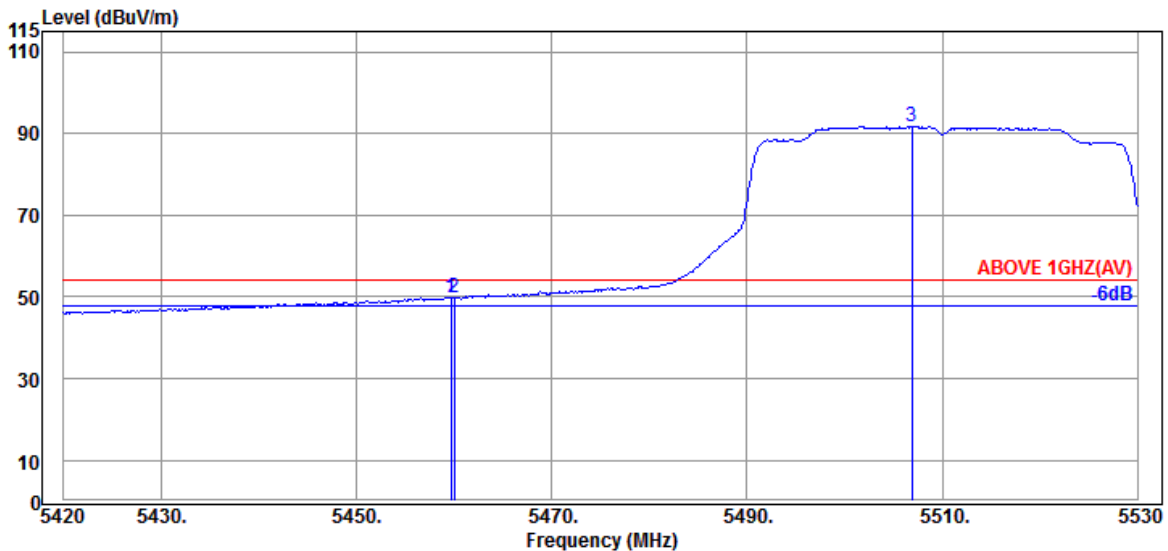


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.710	34.60	9.05	34.21	40.43	49.87	54.00	4.13	Average
5460.040	34.60	9.05	34.21	40.17	49.61	54.00	4.39	Average
@ 5506.900	34.70	9.08	34.21	82.28	91.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

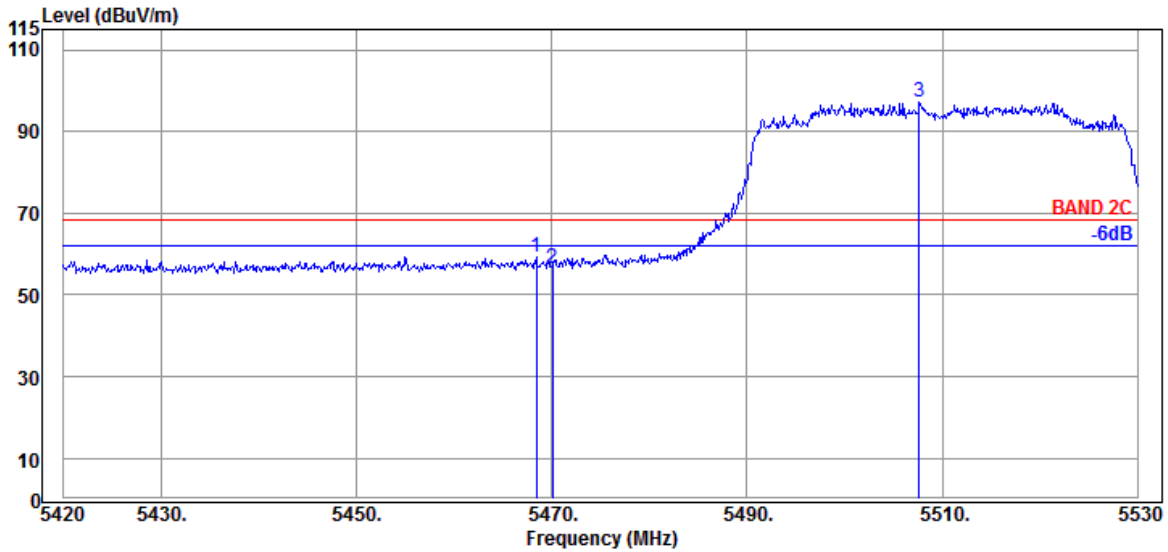

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.400	34.63	9.06	34.21	49.83	59.31	68.20	8.89	Peak
5470.050	34.63	9.06	34.21	47.16	56.64	68.20	11.56	Peak
5507.670	34.70	9.08	34.21	87.71	97.28	---	---	Peak

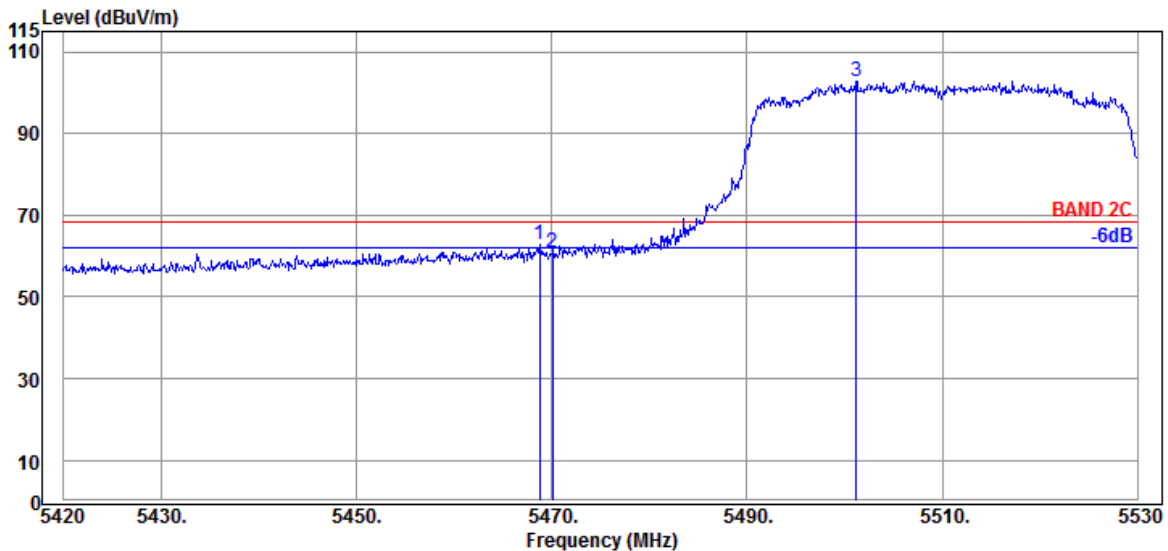


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.730	34.63	9.06	34.21	53.42	62.90	68.20	5.30	Peak
5470.050	34.63	9.06	34.21	51.57	61.05	68.20	7.15	Peak
5501.180	34.70	9.08	34.20	93.34	102.92	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

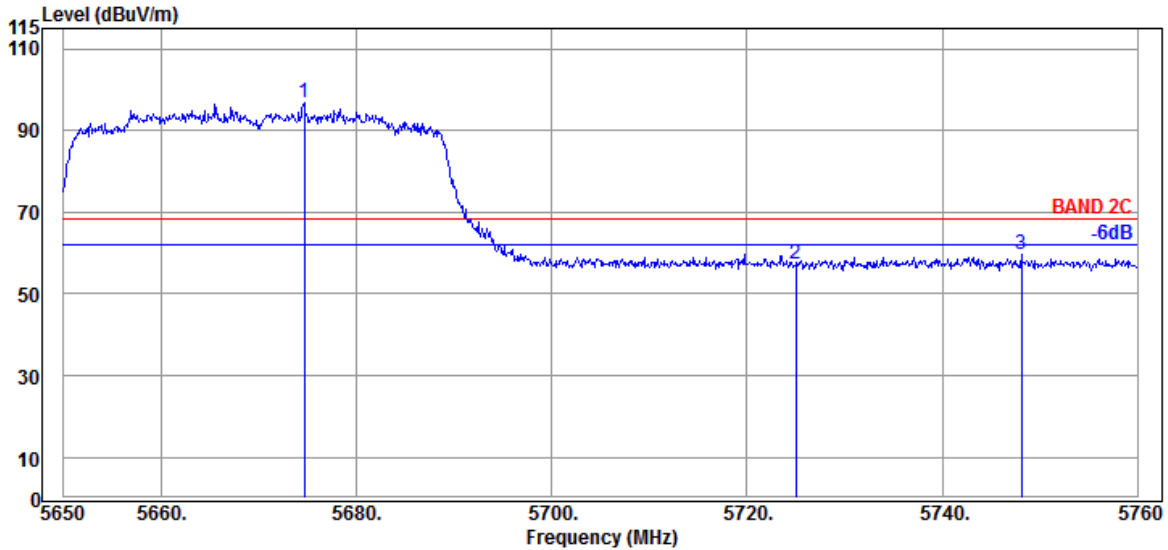

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.640	34.63	9.17	34.29	87.17	96.68	---	---	Peak
5725.020	34.90	9.20	34.30	47.65	57.45	68.20	10.75	Peak
5748.120	35.00	9.20	34.32	49.75	59.63	68.20	8.57	Peak

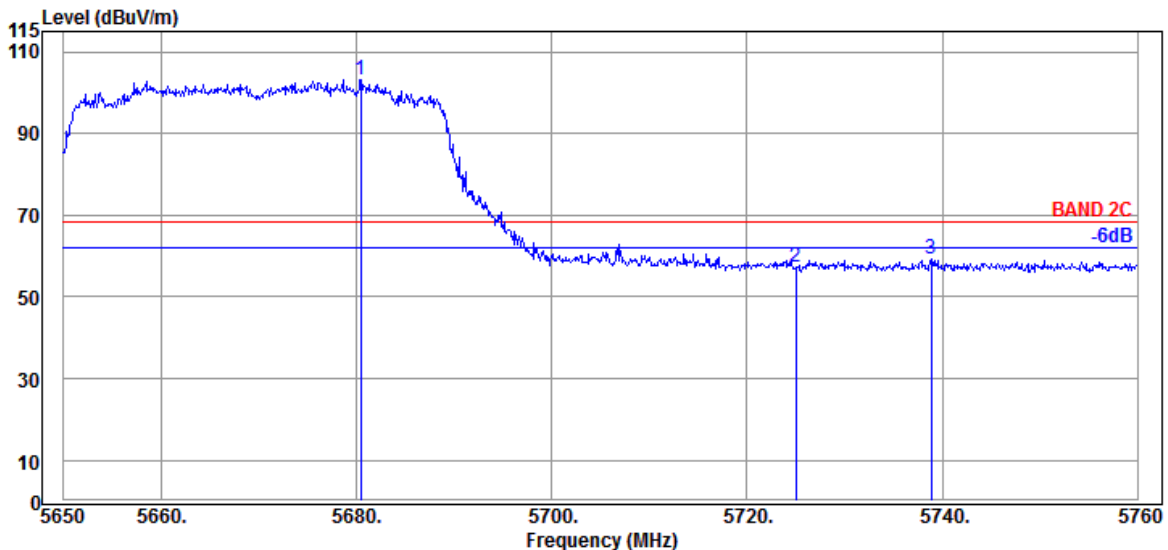


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.470	34.63	9.17	34.29	93.79	103.30	---	---	Peak
5725.020	34.90	9.20	34.30	47.38	57.18	68.20	11.02	Peak
5738.880	35.00	9.20	34.31	49.21	59.10	68.20	9.10	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

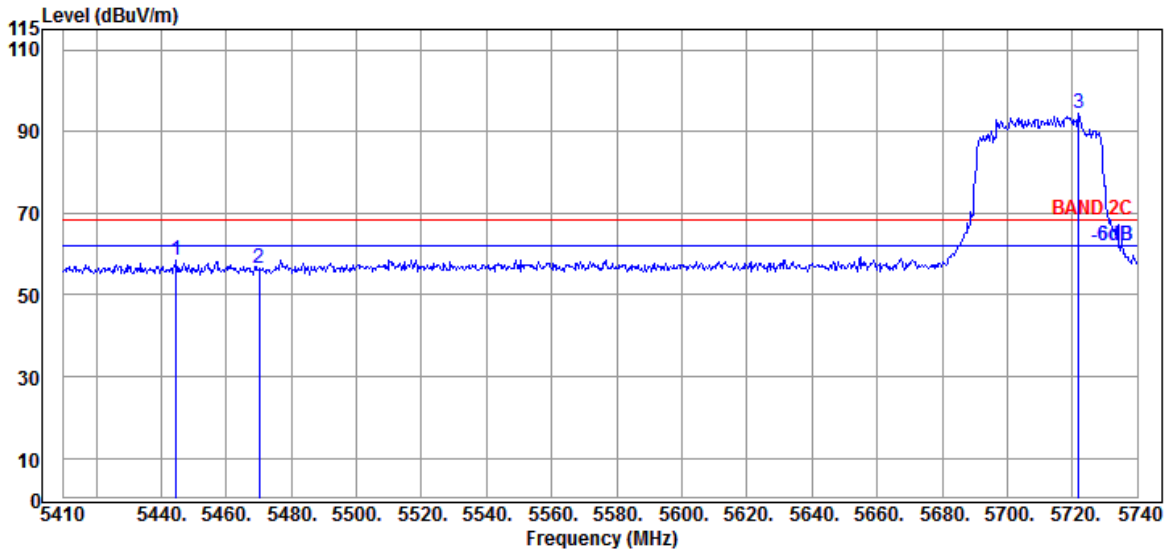

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5444.650	34.65	9.04	34.22	48.96	58.43	68.20	9.77	Peak
5470.060	34.63	9.06	34.21	47.19	56.67	68.20	11.53	Peak
5721.850	34.80	9.19	34.30	84.85	94.54	---	---	Peak

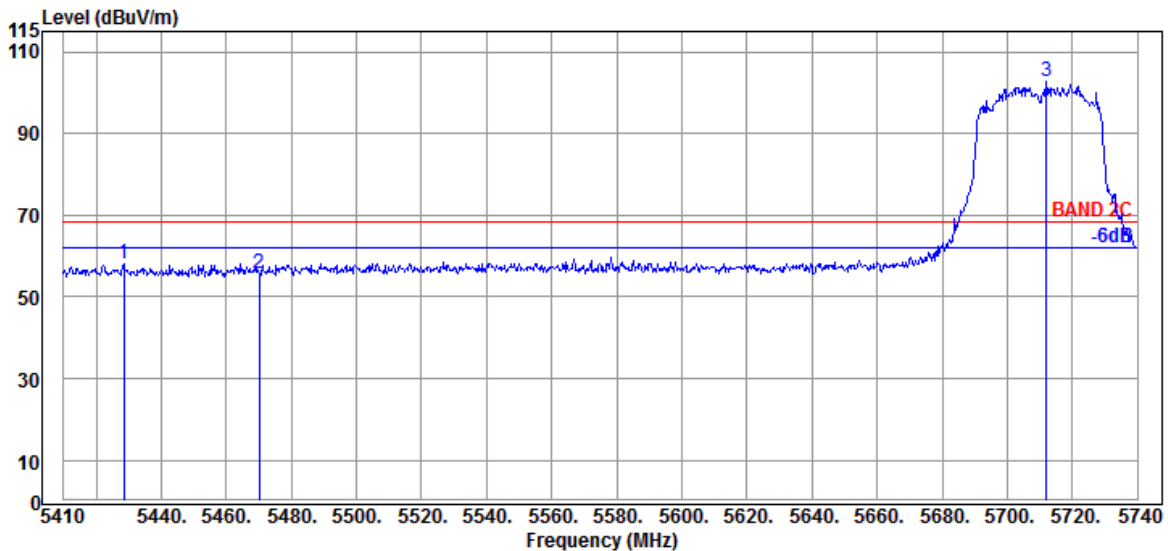


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5428.480	34.70	9.04	34.23	48.61	58.12	68.20	10.08	Peak
5470.060	34.63	9.06	34.21	46.34	55.82	68.20	12.38	Peak
5711.950	34.80	9.19	34.30	93.14	102.83	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

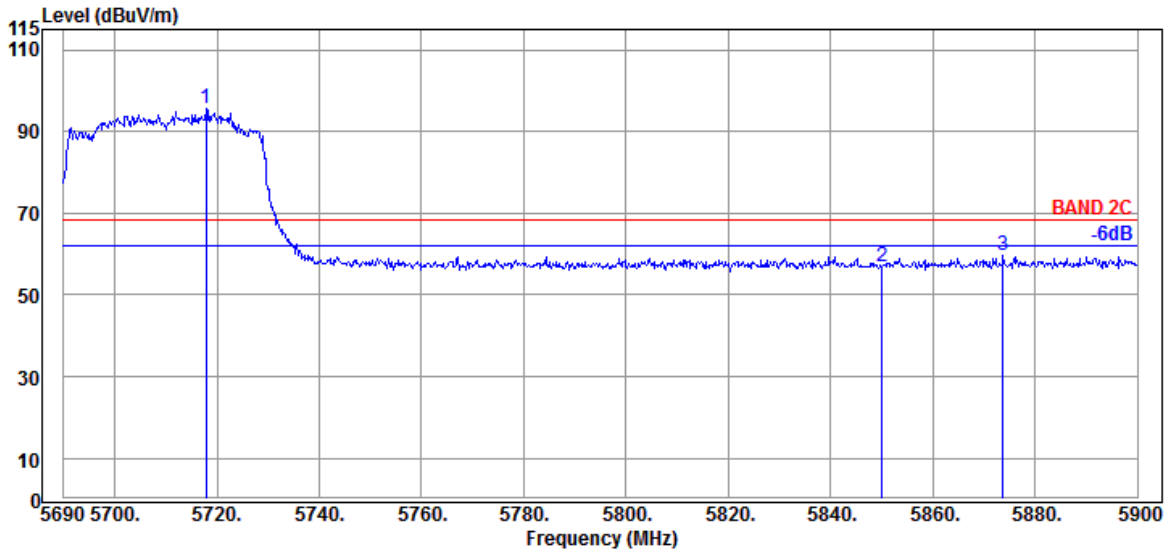

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.930	34.80	9.19	34.30	85.76	95.45	---	---	Peak
5850.020	35.40	9.25	34.36	46.65	56.94	68.20	11.26	Peak
5873.750	35.67	9.27	34.37	49.09	59.66	68.20	8.54	Peak

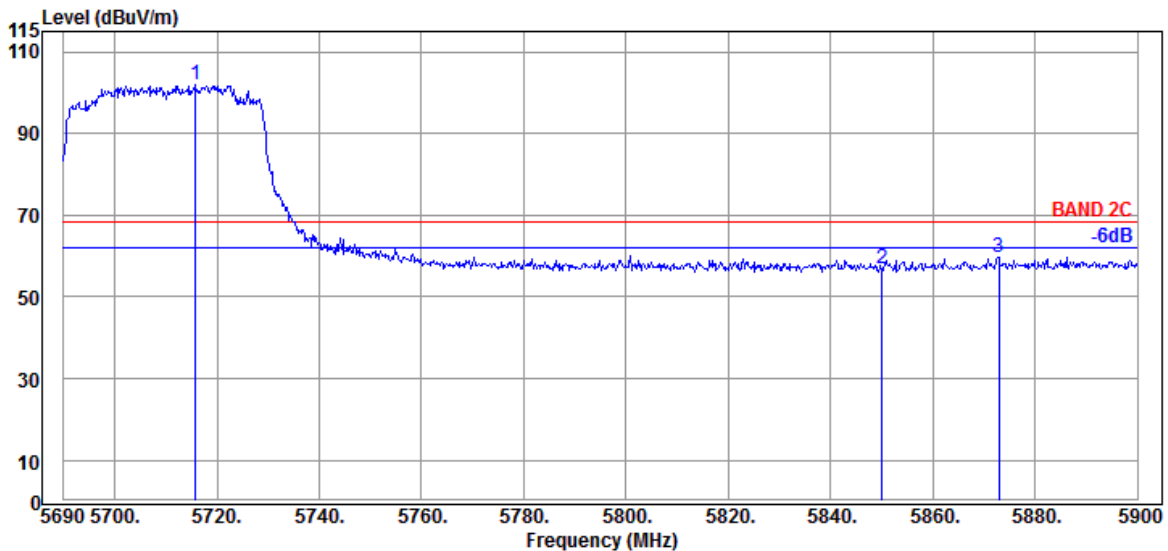


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.830	34.80	9.19	34.30	92.11	101.80	---	---	Peak
5850.020	35.40	9.25	34.36	46.64	56.93	68.20	11.27	Peak
5872.910	35.53	9.26	34.37	49.32	59.74	68.20	8.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

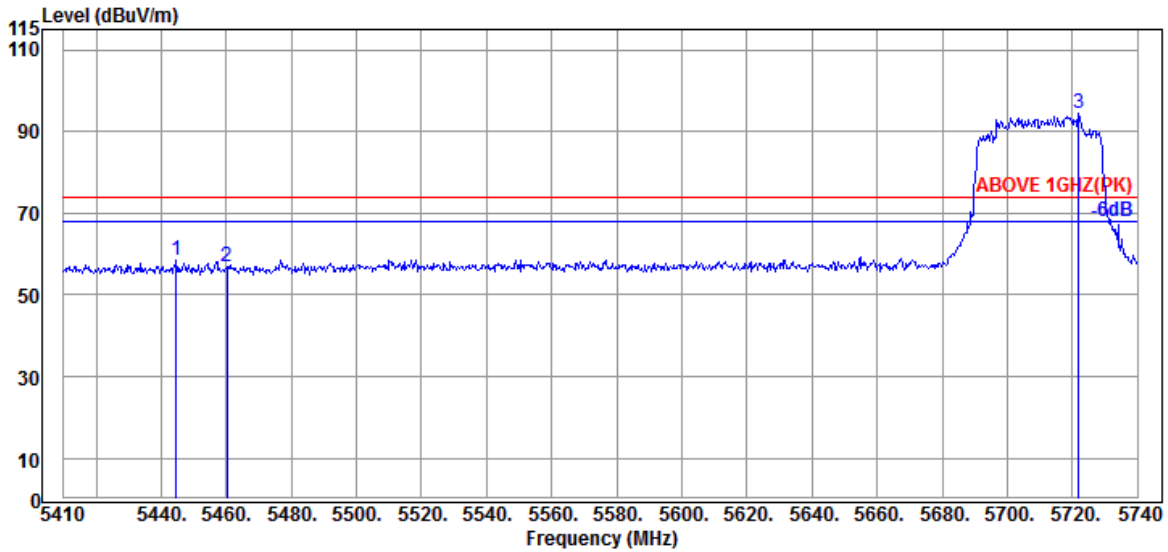

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.65	9.04	34.22	48.96	58.43	74.00	15.57	Peak
5460.160	34.60	9.05	34.21	47.43	56.87	74.00	17.13	Peak
@ 5721.850	34.80	9.19	34.30	84.85	94.54	---	---	Peak

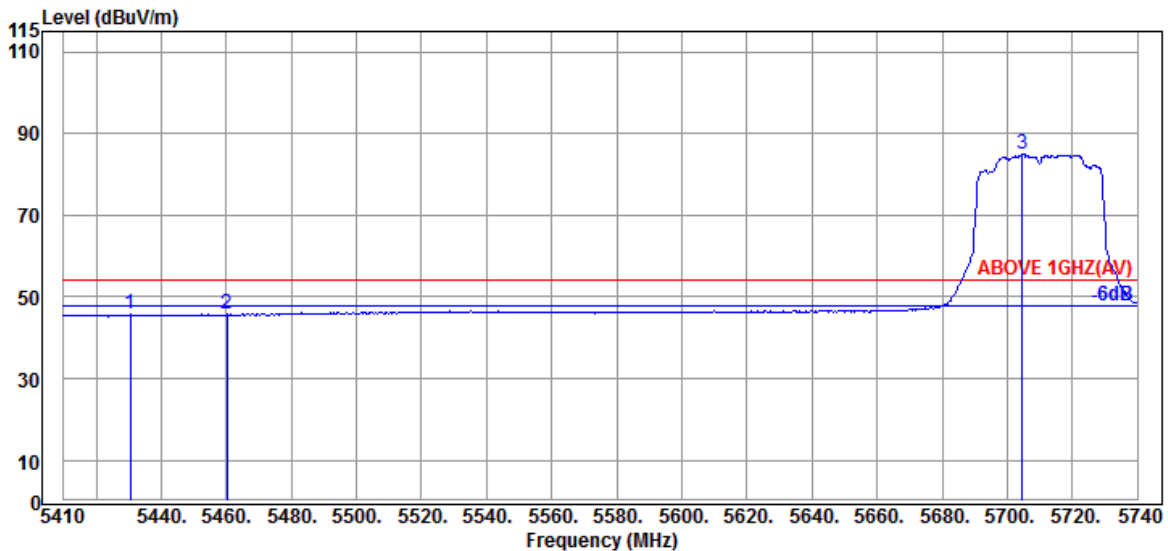


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.460	34.70	9.04	34.23	36.23	45.74	54.00	8.26	Average
5460.160	34.60	9.05	34.21	36.21	45.65	54.00	8.35	Average
@ 5704.690	34.70	9.18	34.29	75.28	84.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

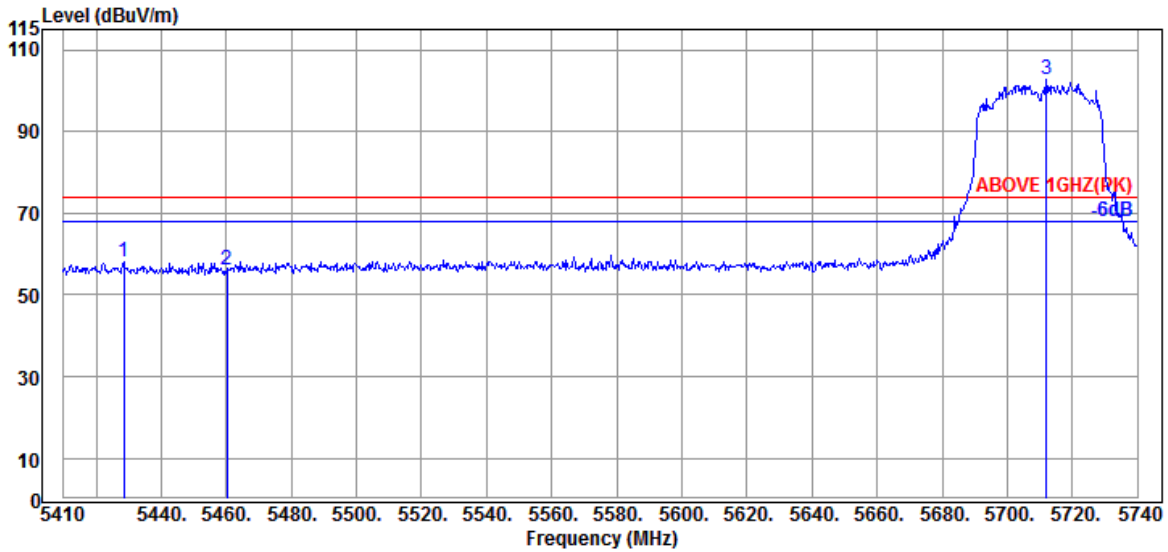

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.480	34.70	9.04	34.23	48.61	58.12	74.00	15.88	Peak
5460.160	34.60	9.05	34.21	46.68	56.12	74.00	17.88	Peak
@ 5711.950	34.80	9.19	34.30	93.14	102.83	---	---	Peak

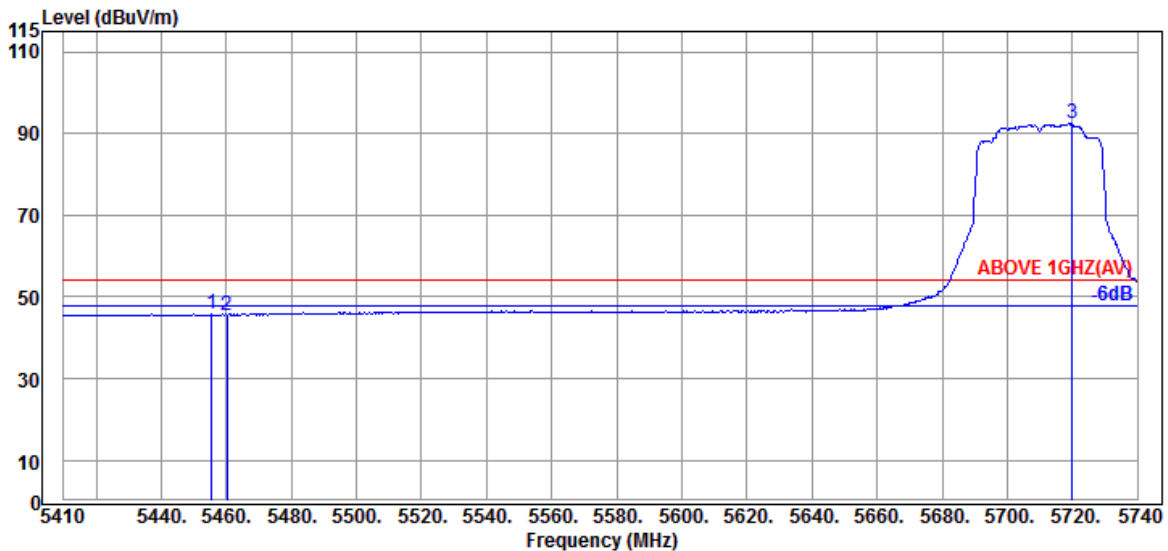


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.540	34.60	9.05	34.21	36.34	45.78	54.00	8.22	Average
5460.160	34.60	9.05	34.21	36.14	45.58	54.00	8.42	Average
@ 5719.870	34.80	9.19	34.30	82.66	92.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

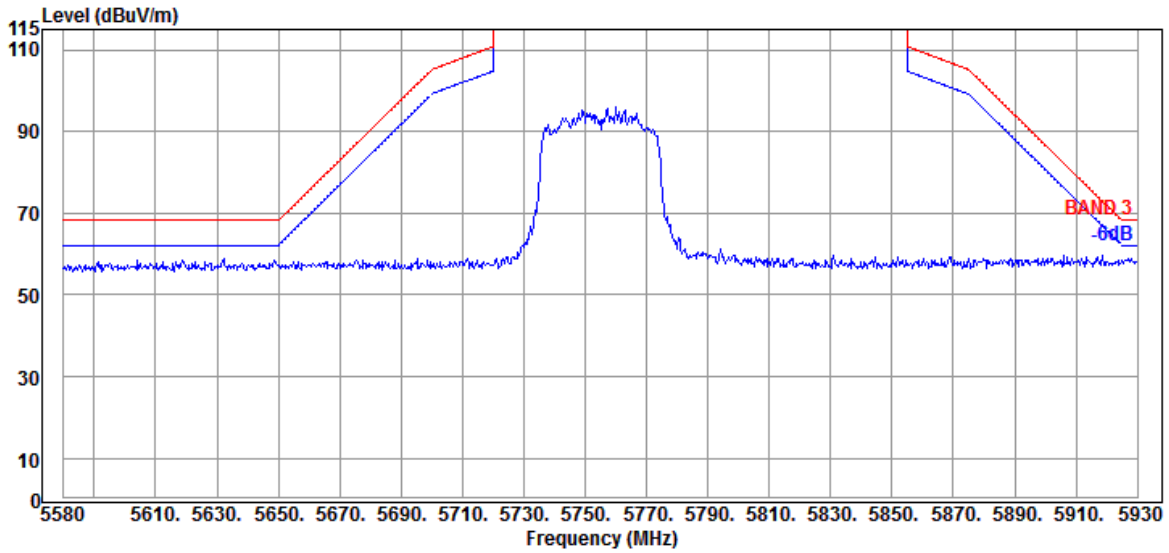


Antenna at Vertical Polarization

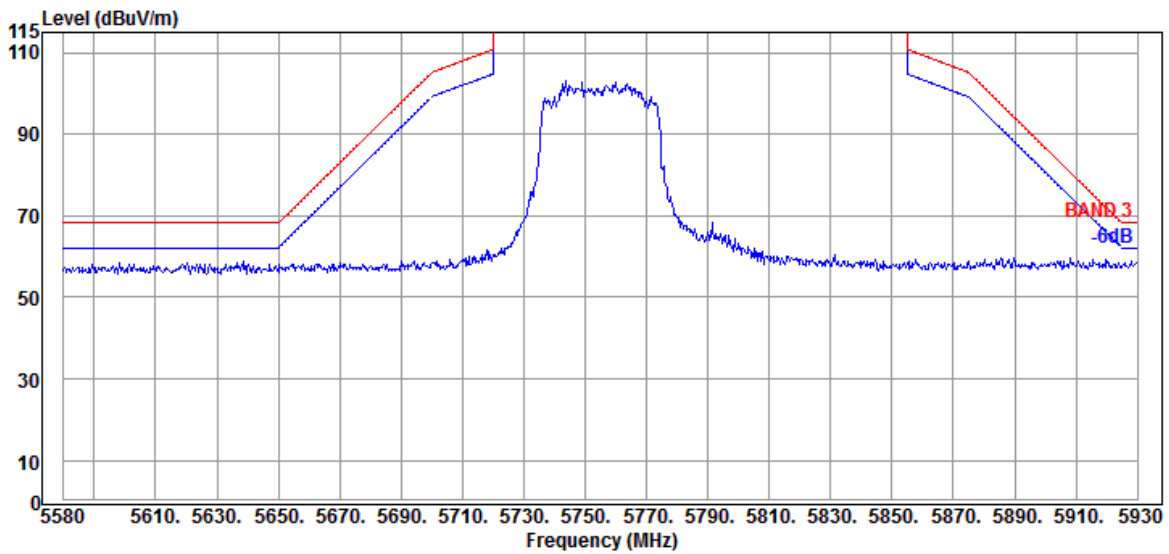


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

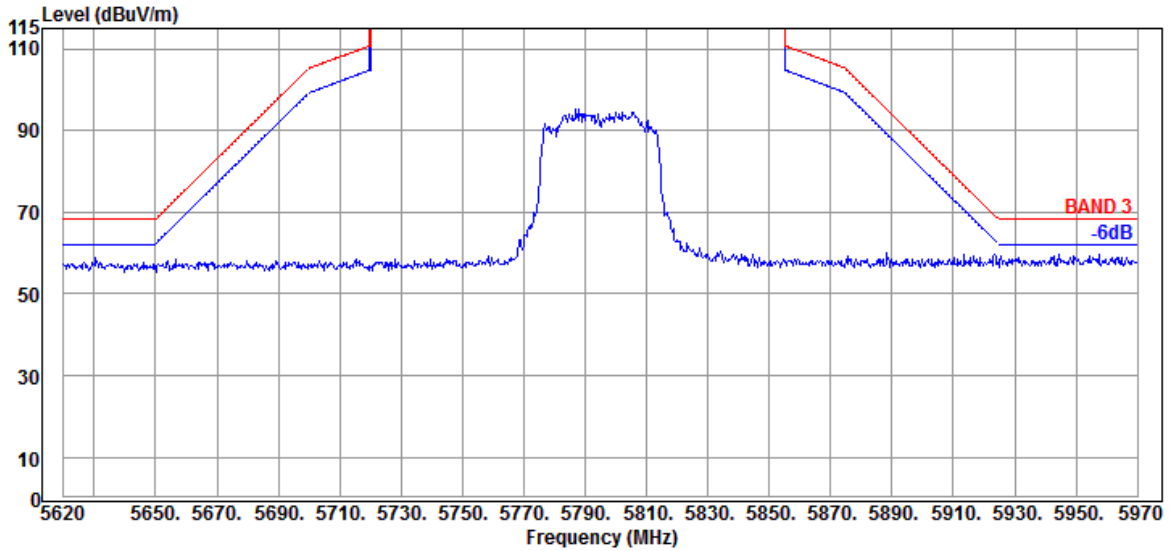

Antenna at Vertical Polarization

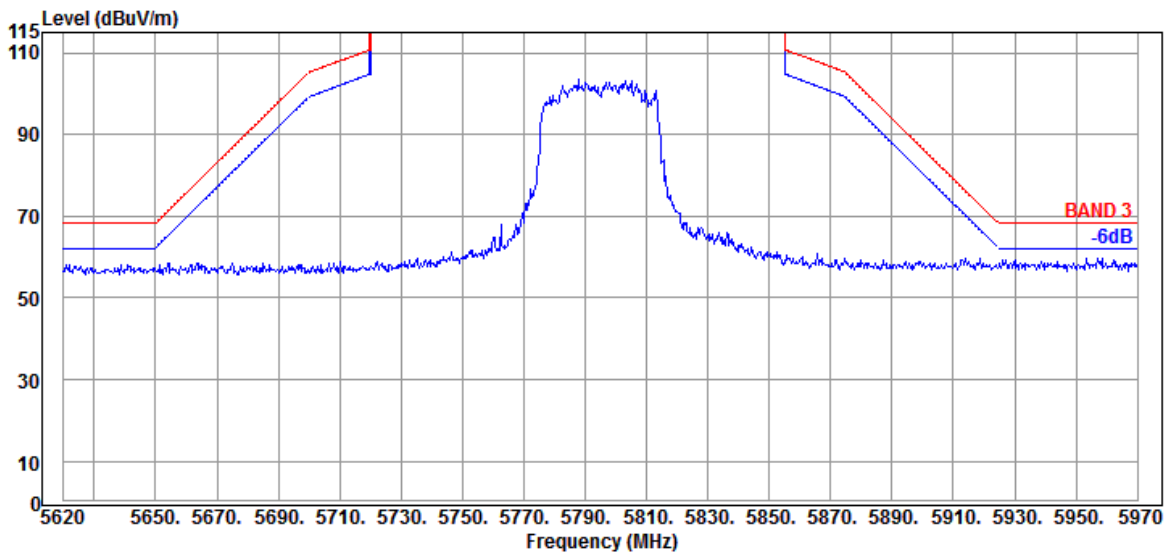


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

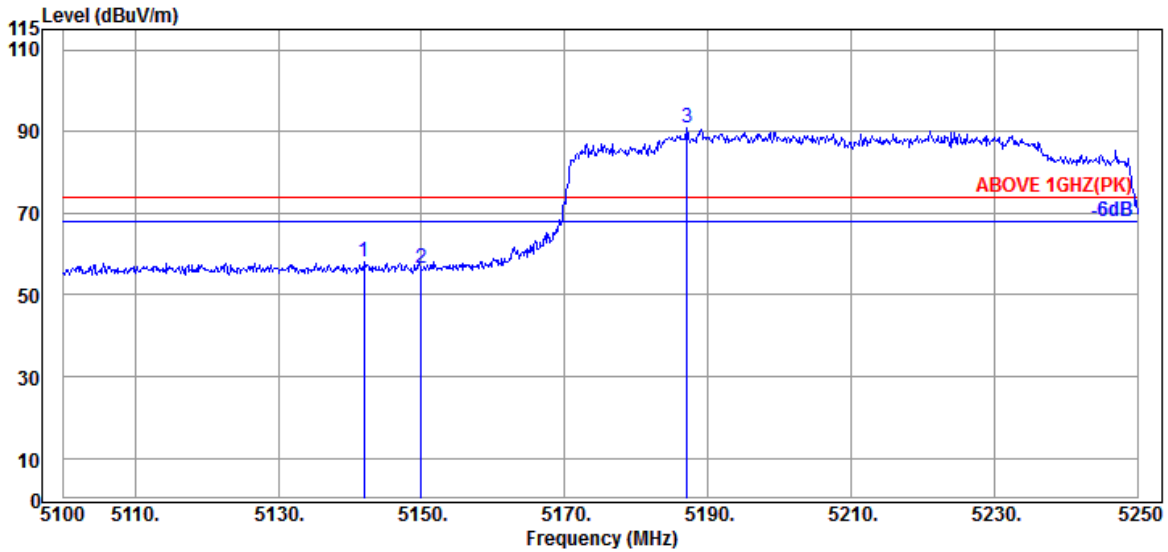

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	34.50	8.88	34.34	49.03	58.07	74.00	15.93	Peak
5149.950	34.50	8.88	34.34	47.34	56.38	74.00	17.62	Peak
@ 5187.150	34.70	8.91	34.32	81.77	91.06	---	---	Peak

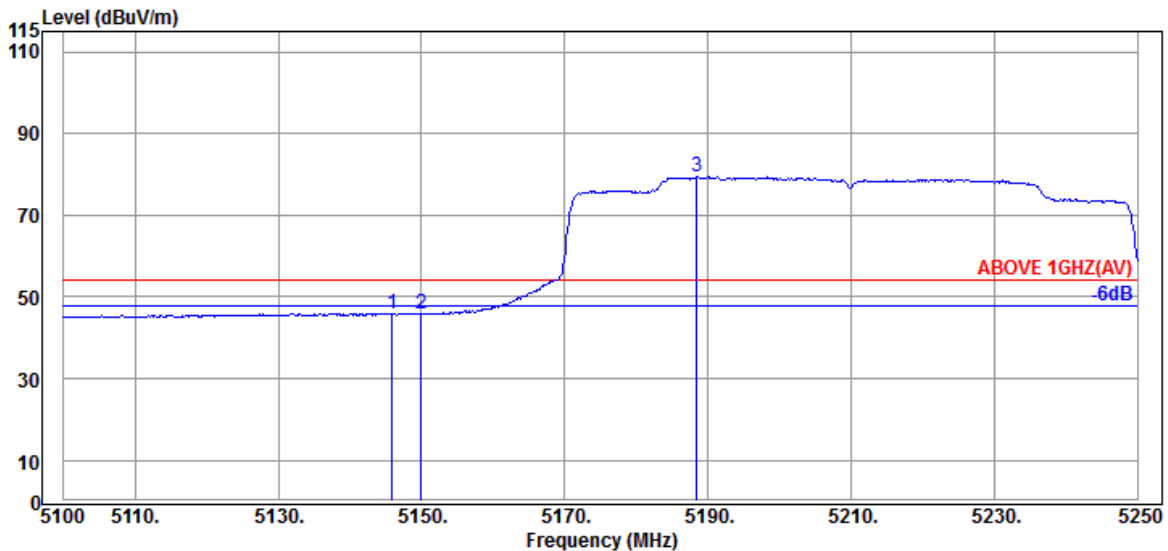


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	34.50	8.88	34.34	36.96	46.00	54.00	8.00	Average
5149.950	34.50	8.88	34.34	36.87	45.91	54.00	8.09	Average
@ 5188.500	34.70	8.91	34.32	70.19	79.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

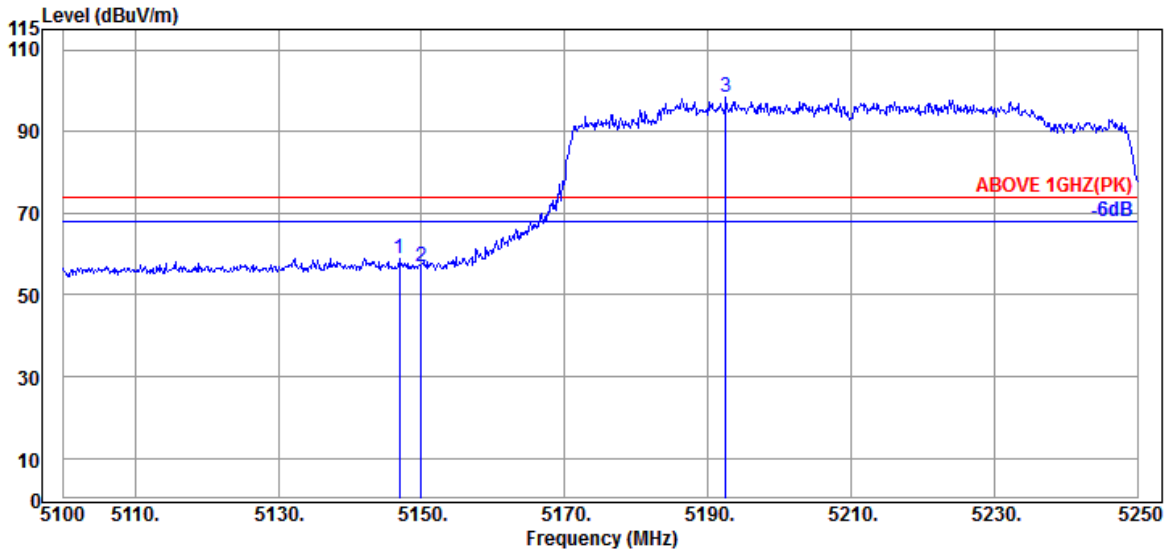

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.950	34.50	8.88	34.34	49.80	58.84	74.00	15.16	Peak
5149.950	34.50	8.88	34.34	47.83	56.87	74.00	17.13	Peak
@ 5192.550	34.70	8.91	34.32	88.98	98.27	---	---	Peak

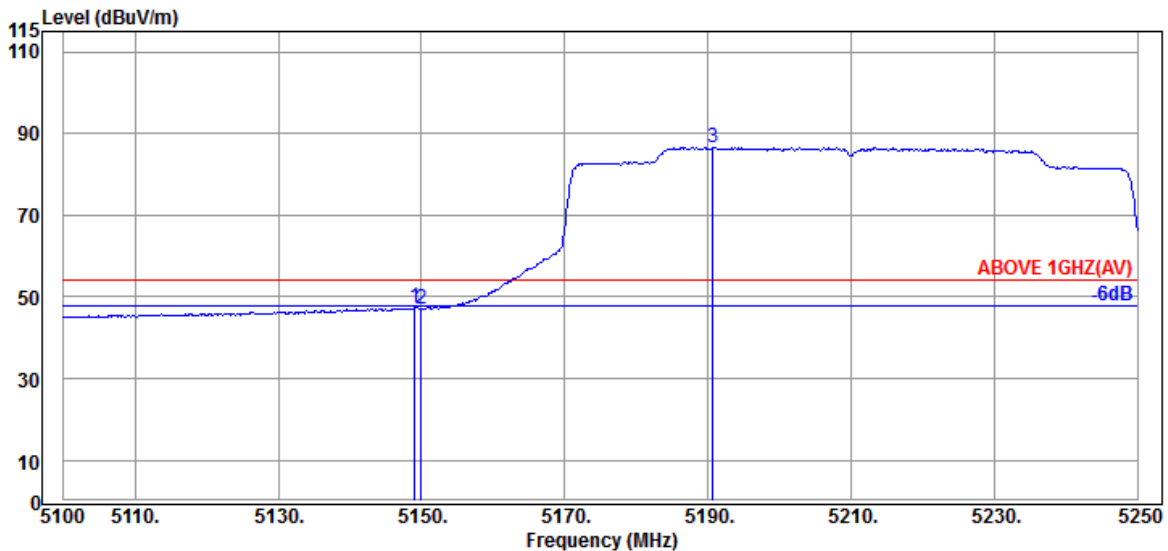


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.50	8.88	34.34	38.35	47.39	54.00	6.61	Average
5149.950	34.50	8.88	34.34	38.09	47.13	54.00	6.87	Average
@ 5190.750	34.70	8.91	34.32	77.27	86.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

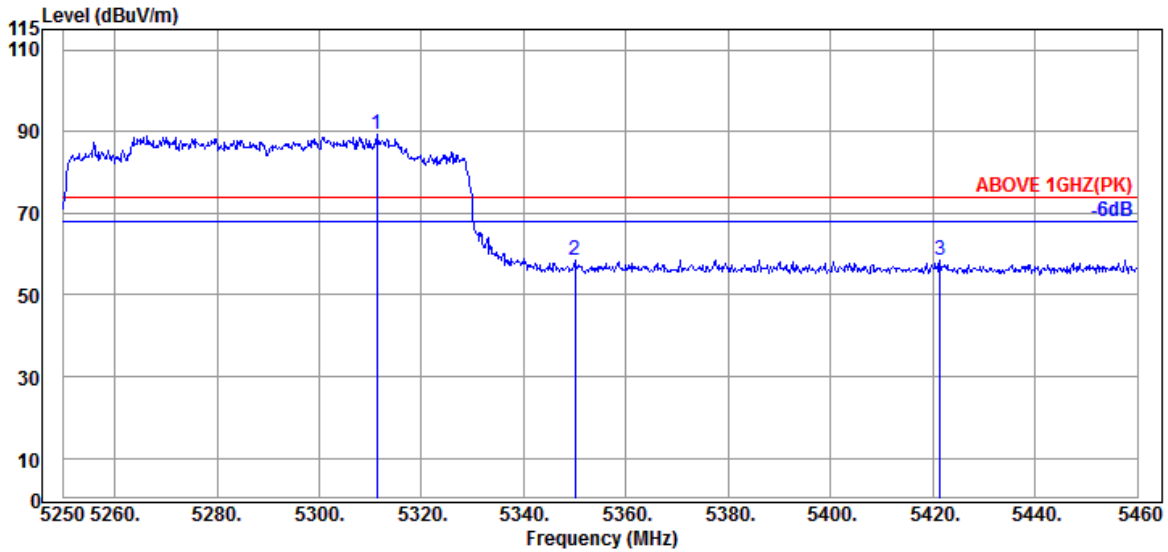

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.320	34.57	8.98	34.27	79.86	89.14	---	---	Peak
5349.960	34.90	8.99	34.26	48.88	58.51	74.00	15.49	Peak
5421.360	34.70	9.04	34.23	49.03	58.54	74.00	15.46	Peak

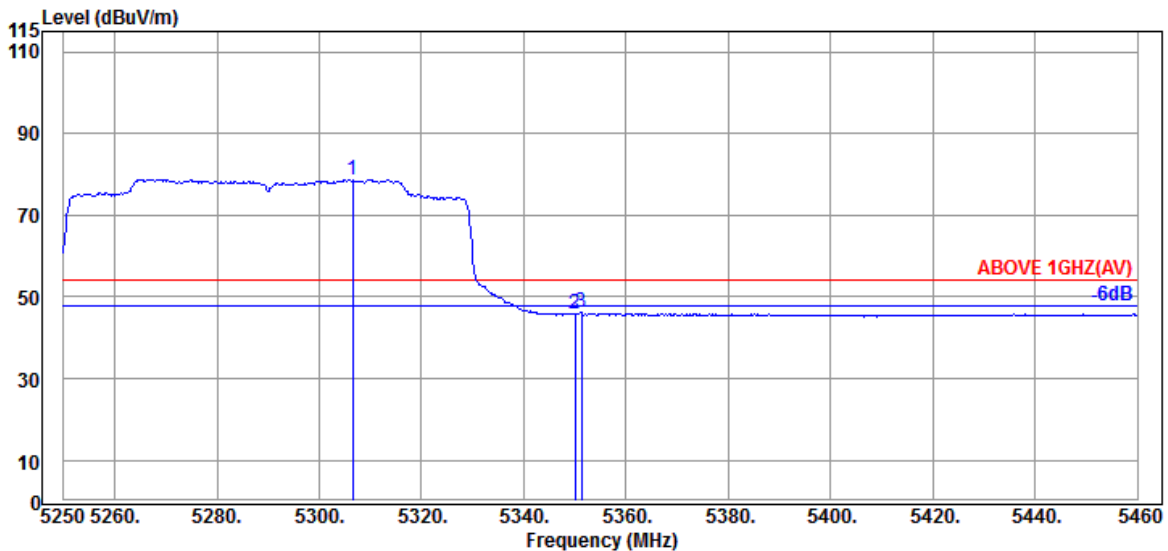


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.490	34.40	8.97	34.28	69.63	78.72	---	---	Average
5349.960	34.90	8.99	34.26	36.07	45.70	54.00	8.30	Average
5351.220	34.90	8.99	34.26	36.45	46.08	54.00	7.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

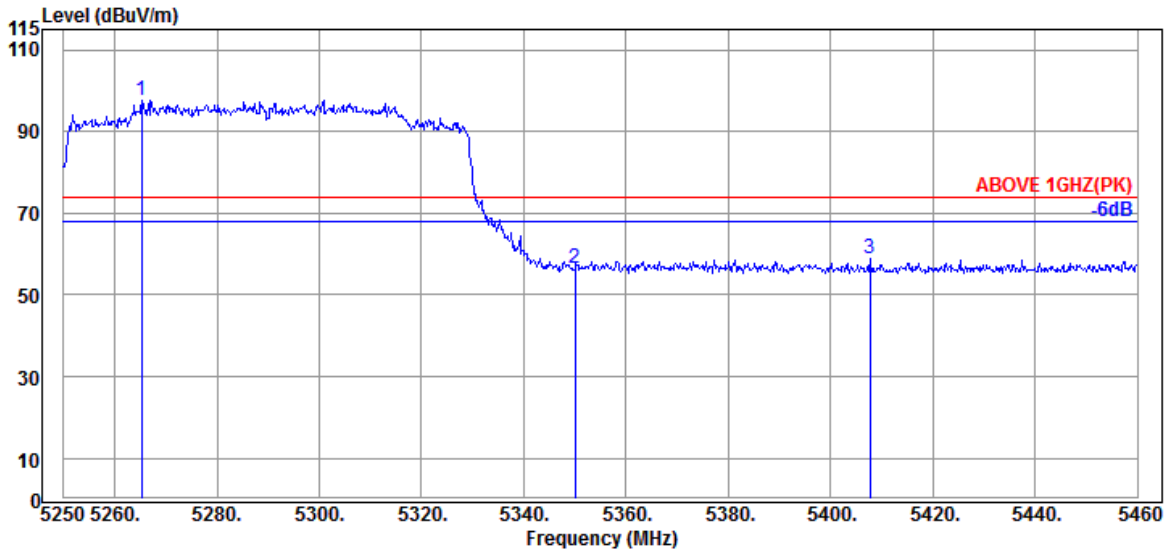

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.330	34.47	8.95	34.29	88.66	97.79	---	---	Peak
5349.960	34.90	8.99	34.26	46.70	56.33	74.00	17.67	Peak
5407.710	34.75	9.03	34.23	49.30	58.85	74.00	15.15	Peak

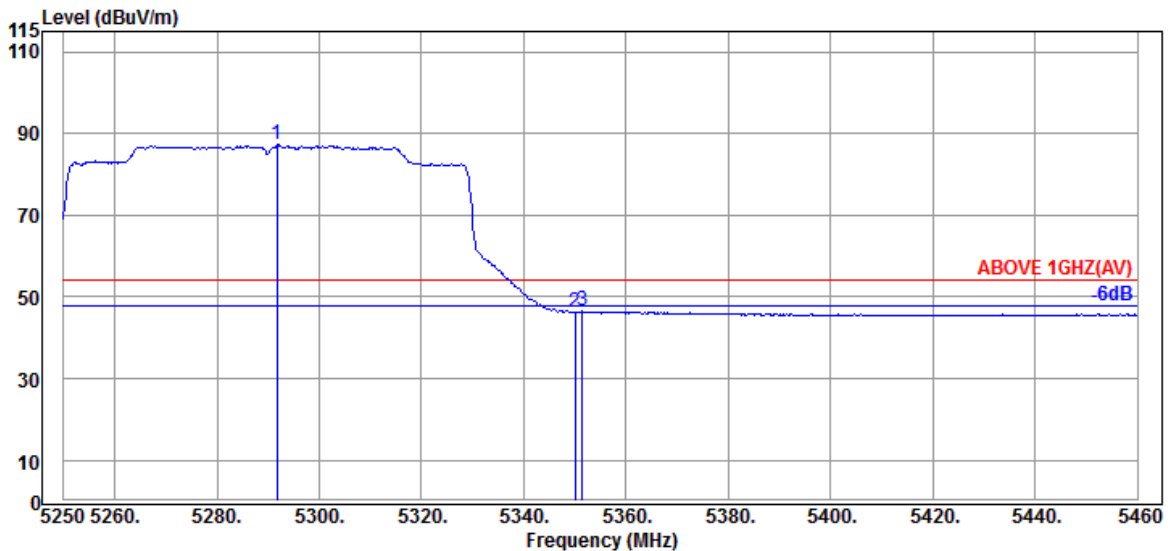


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.790	34.43	8.96	34.28	78.15	87.26	---	---	Average
5349.960	34.90	8.99	34.26	36.58	46.21	54.00	7.79	Average
5351.430	34.90	8.99	34.26	36.84	46.47	54.00	7.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

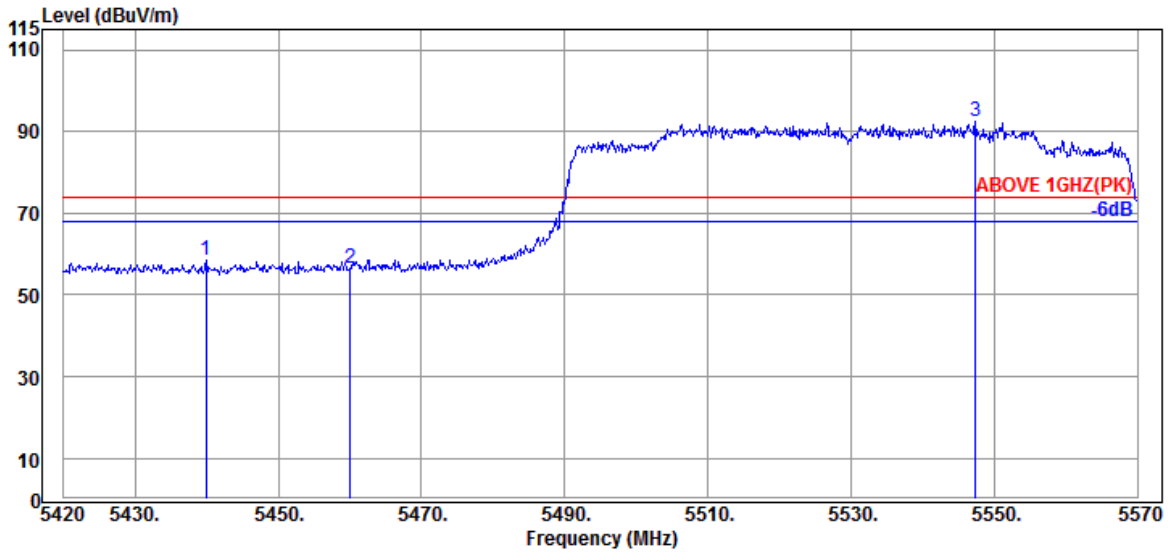

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.950	34.65	9.04	34.22	48.93	58.40	74.00	15.60	Peak
5460.050	34.60	9.05	34.21	46.88	56.32	74.00	17.68	Peak
@ 5547.350	34.70	9.10	34.23	83.06	92.63	---	---	Peak

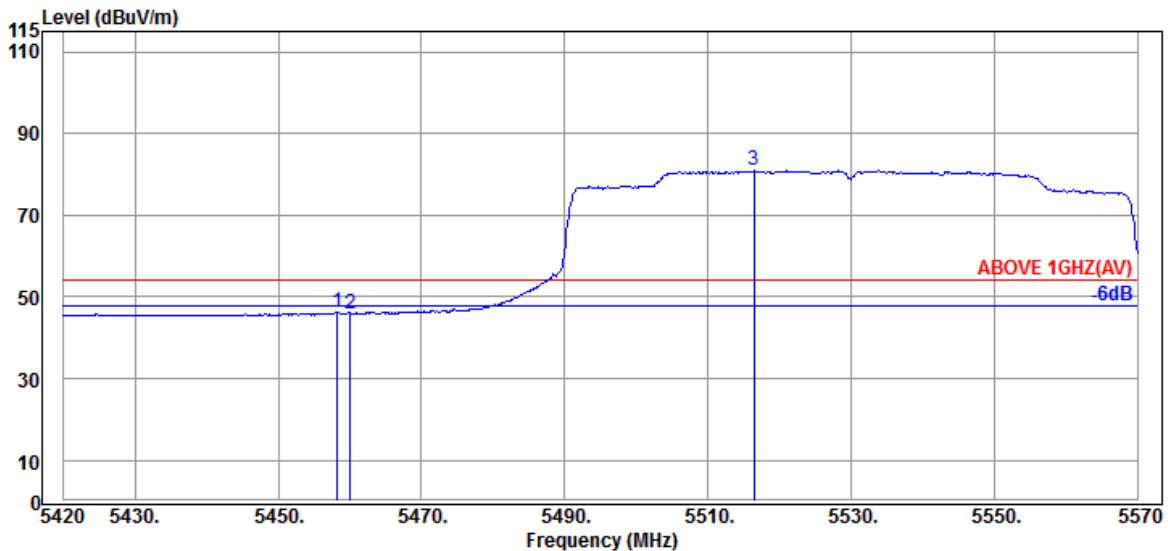


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	36.71	46.15	54.00	7.85	Average
5460.050	34.60	9.05	34.21	36.54	45.98	54.00	8.02	Average
@ 5516.450	34.70	9.09	34.21	71.39	80.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

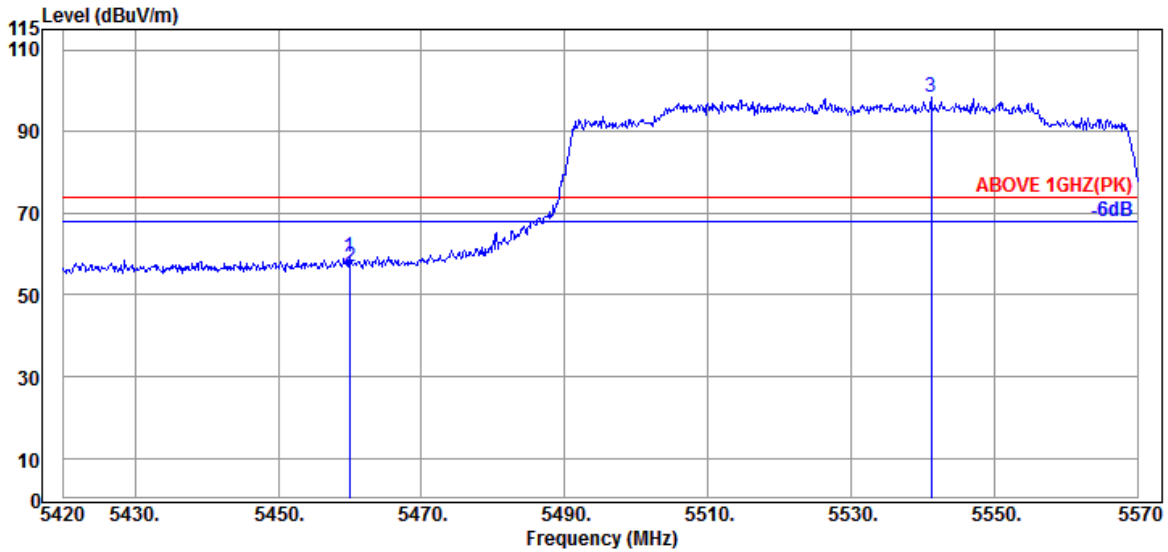

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.60	9.05	34.21	49.99	59.43	74.00	14.57	Peak
5460.050	34.60	9.05	34.21	47.38	56.82	74.00	17.18	Peak
@ 5541.200	34.70	9.09	34.22	88.80	98.37	---	---	Peak

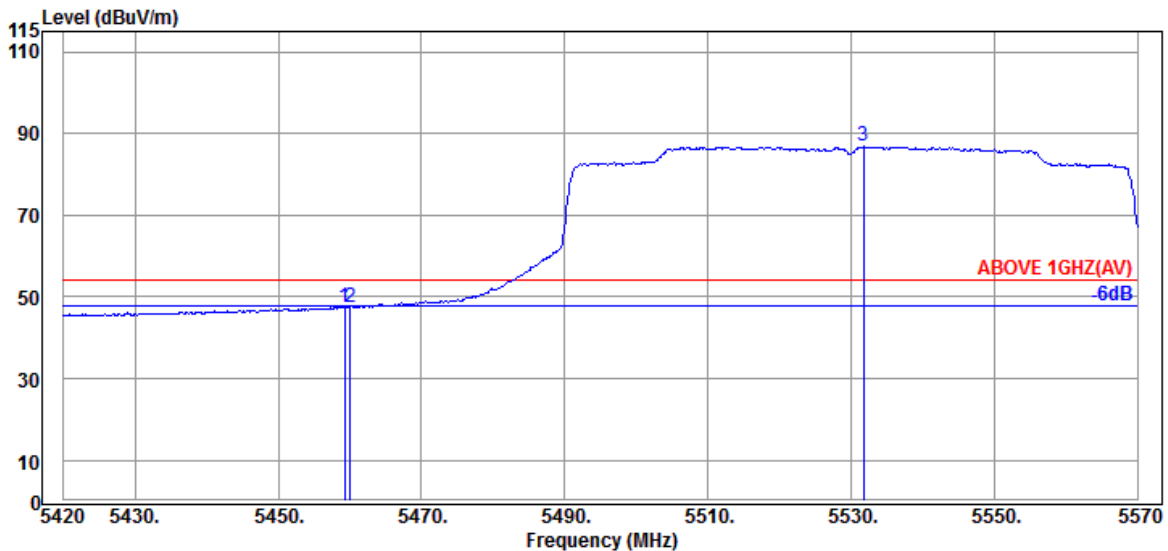


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.60	9.05	34.21	38.08	47.52	54.00	6.48	Average
5460.050	34.60	9.05	34.21	37.95	47.39	54.00	6.61	Average
@ 5531.750	34.70	9.09	34.22	77.24	86.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

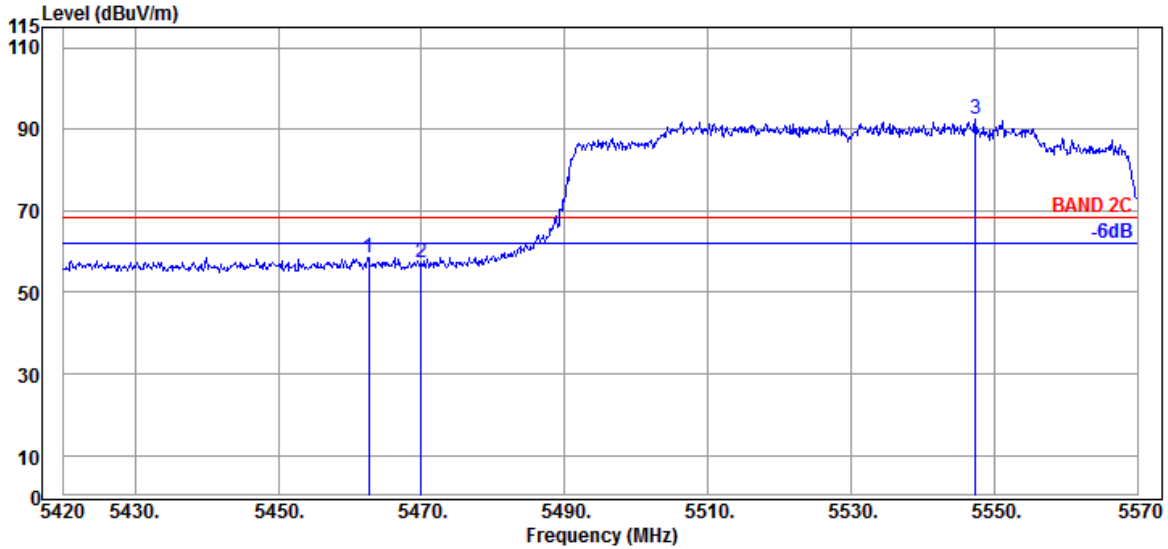

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5462.600	34.60	9.05	34.21	49.13	58.57	68.20	9.63	Peak
	5469.950	34.63	9.06	34.21	47.84	57.32	68.20	10.88	Peak
	5547.350	34.70	9.10	34.23	83.06	92.63	---	---	Peak

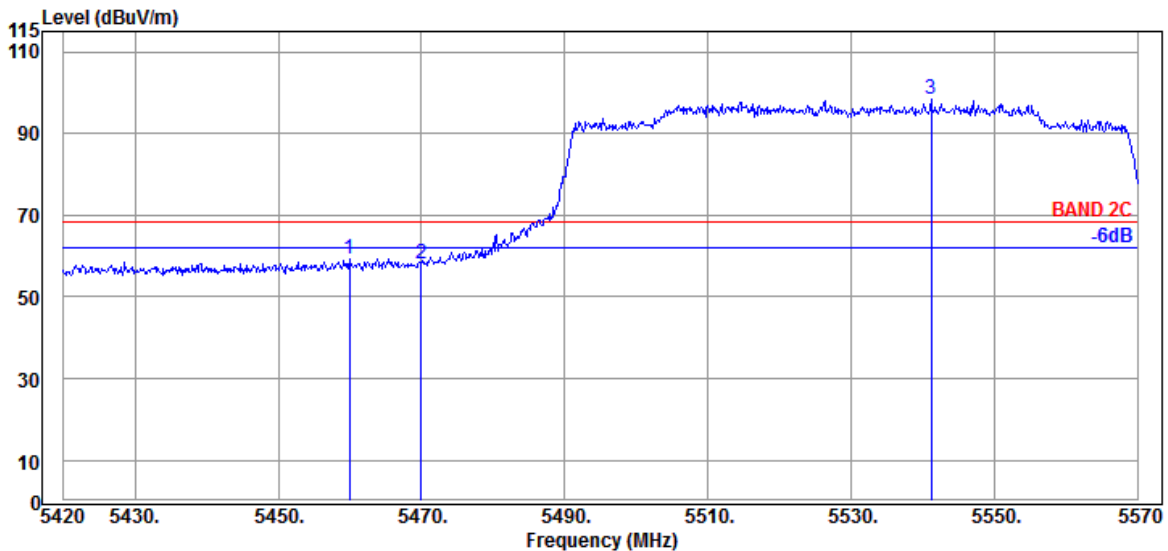


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5459.900	34.60	9.05	34.21	49.99	59.43	68.20	8.77	Peak
	5469.950	34.63	9.06	34.21	48.49	57.97	68.20	10.23	Peak
	5541.200	34.70	9.09	34.22	88.80	98.37	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

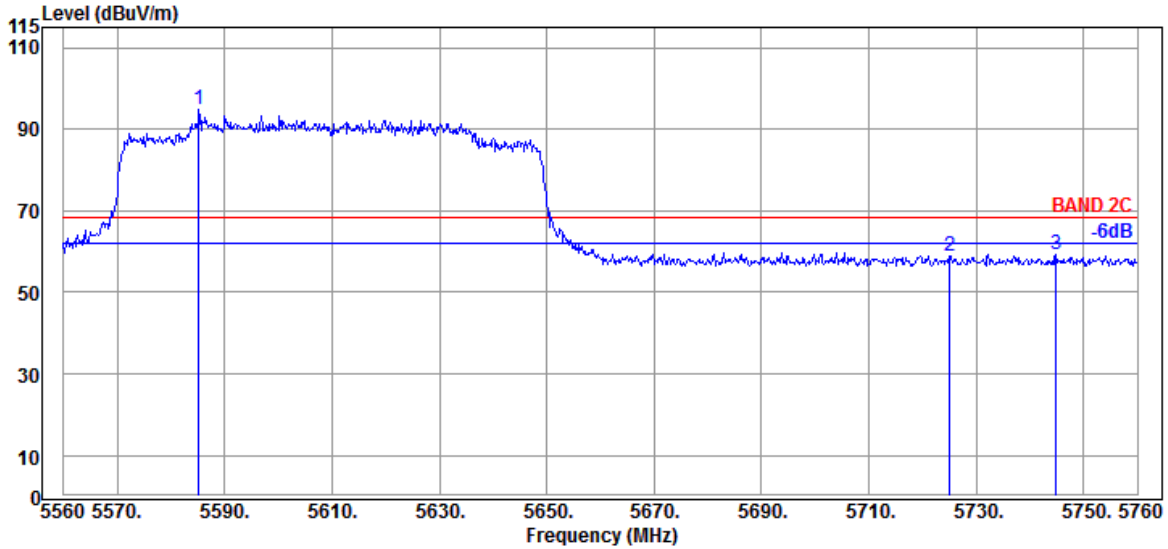

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5585.200	34.50	9.12	34.24	85.42	94.80	---	---	Peak
	5725.000	34.90	9.20	34.30	49.14	58.94	68.20	9.26	Peak
	5744.800	35.00	9.20	34.31	49.22	59.11	68.20	9.09	Peak

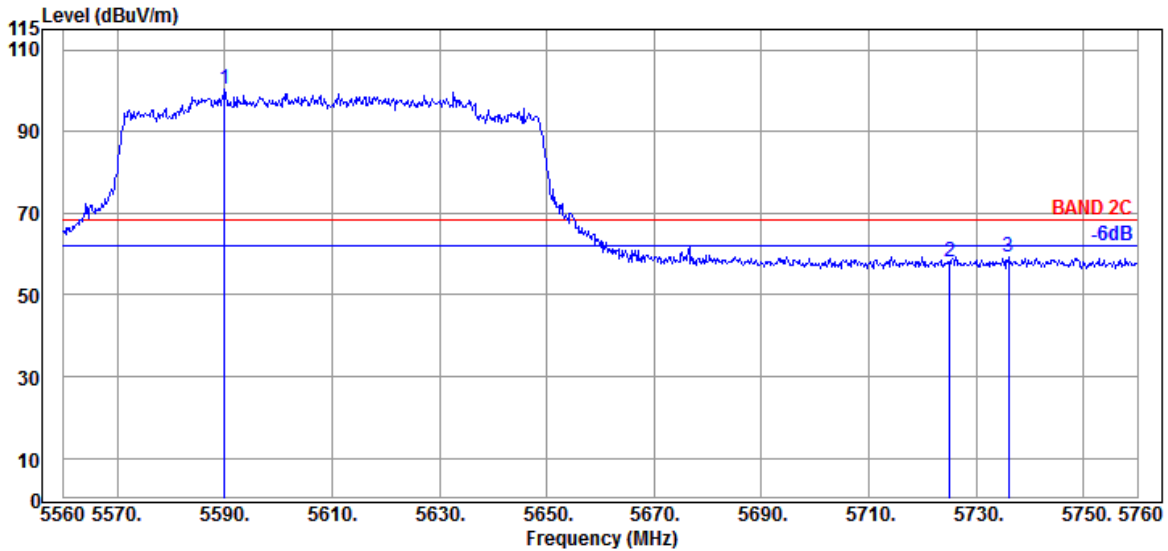


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5590.000	34.50	9.12	34.24	90.82	100.20	---	---	Peak
	5725.000	34.90	9.20	34.30	48.39	58.19	68.20	10.01	Peak
	5736.000	34.90	9.20	34.31	49.60	59.39	68.20	8.81	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

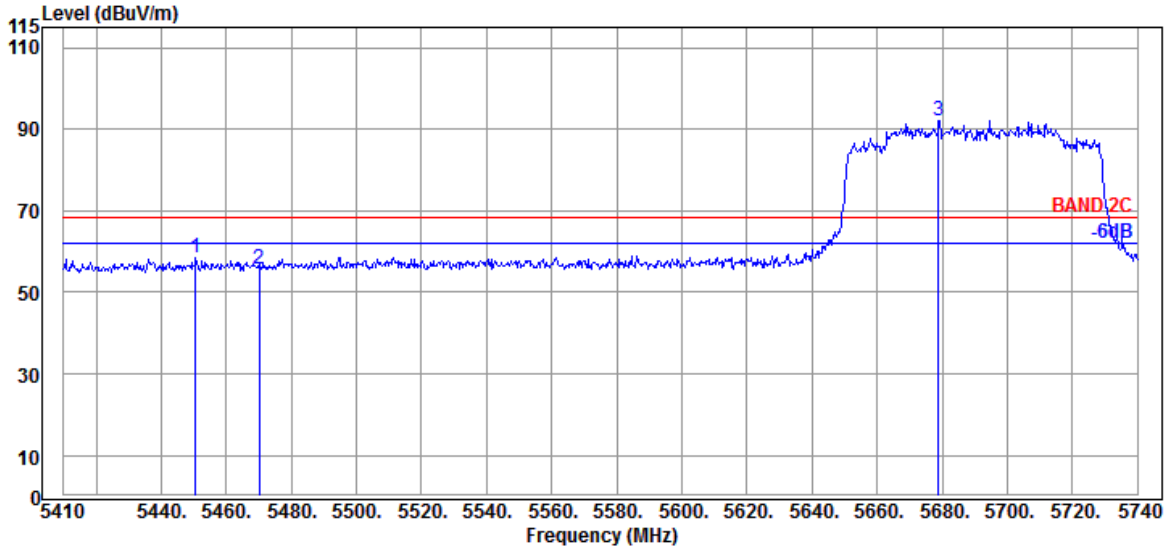

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5450.590	34.60	9.05	34.22	48.93	58.36	68.20	9.84	Peak
	5470.060	34.63	9.06	34.21	46.23	55.71	68.20	12.49	Peak
	5678.950	34.63	9.17	34.29	82.70	92.21	---	---	Peak

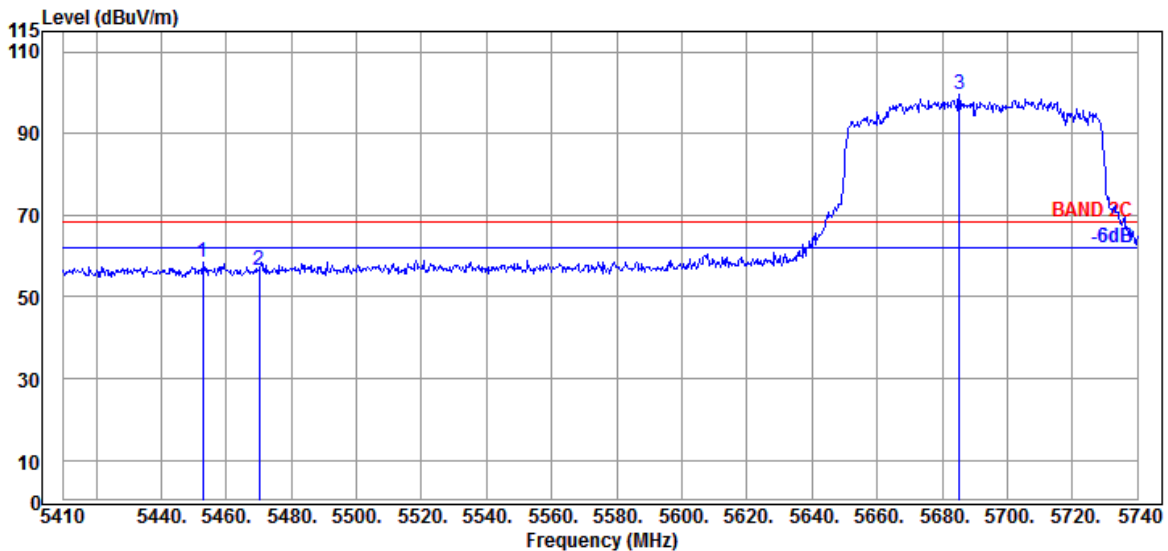


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5452.900	34.60	9.05	34.21	49.10	58.54	68.20	9.66	Peak
	5470.060	34.63	9.06	34.21	46.85	56.33	68.20	11.87	Peak
	5685.220	34.63	9.17	34.29	89.99	99.50	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

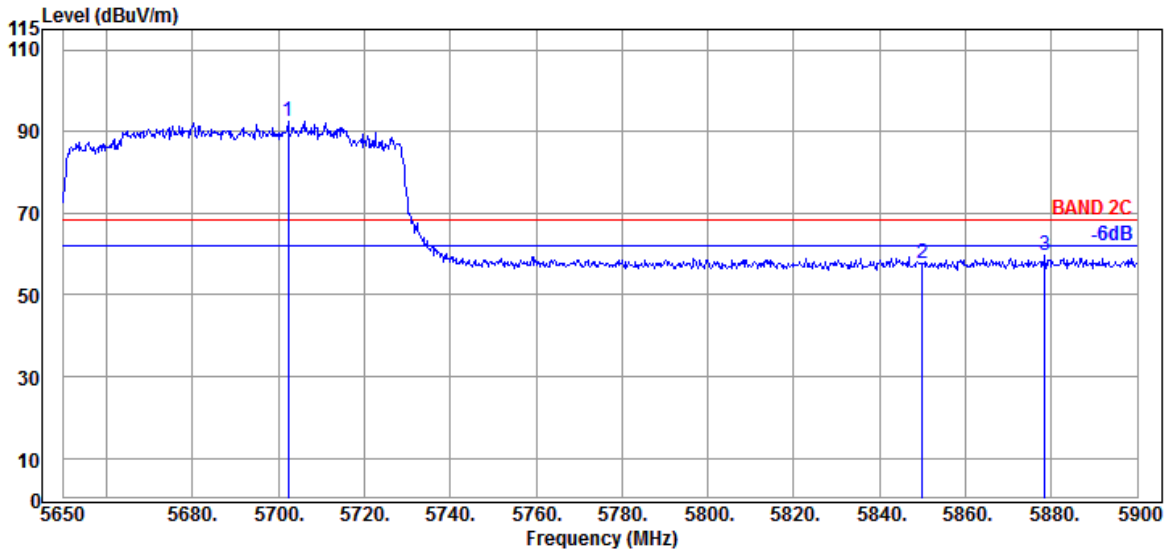

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.250	34.70	9.18	34.29	82.86	92.45	---	---	Peak
5850.000	35.40	9.25	34.36	47.44	57.73	68.20	10.47	Peak
5878.500	35.67	9.27	34.38	48.98	59.54	68.20	8.66	Peak

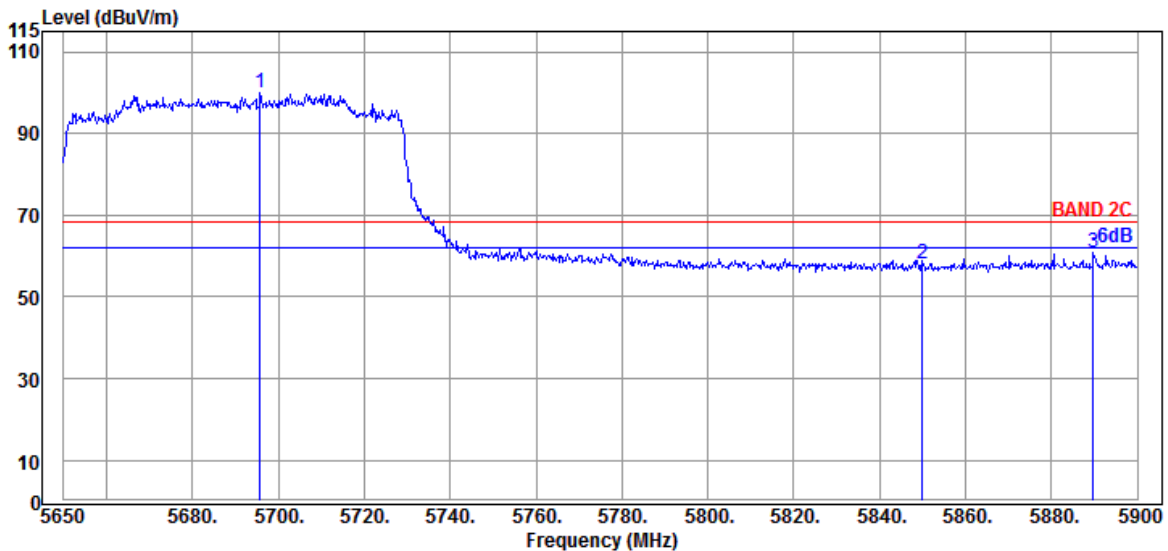


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.750	34.70	9.18	34.29	90.53	100.12	---	---	Peak
5850.000	35.40	9.25	34.36	47.71	58.00	68.20	10.20	Peak
5889.750	35.67	9.27	34.38	50.24	60.80	68.20	7.40	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

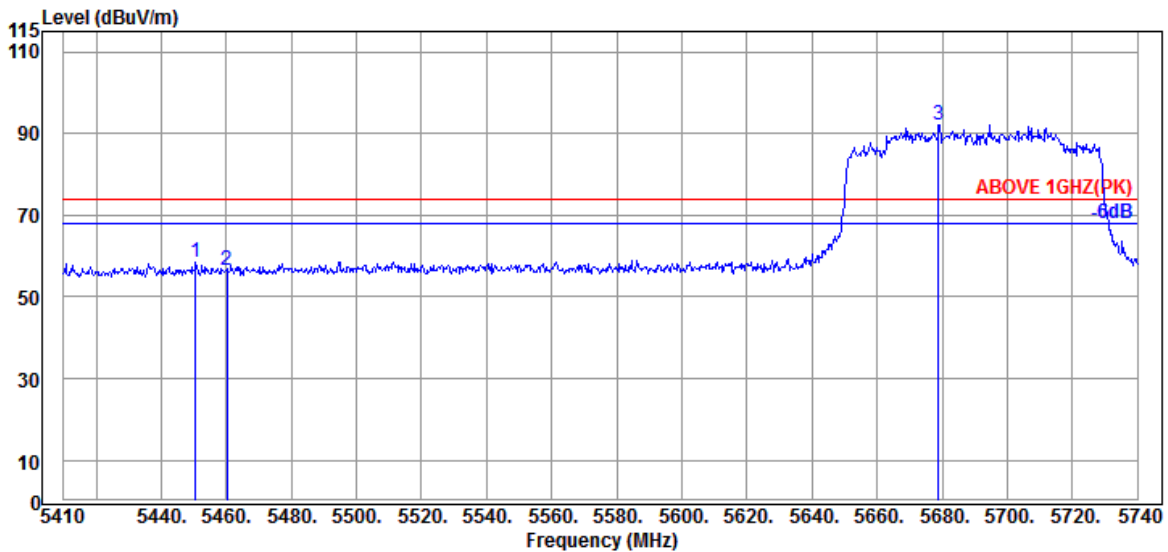

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.60	9.05	34.22	48.93	58.36	74.00	15.64	Peak
5460.160	34.60	9.05	34.21	47.21	56.65	74.00	17.35	Peak
@ 5678.950	34.63	9.17	34.29	82.70	92.21	---	---	Peak

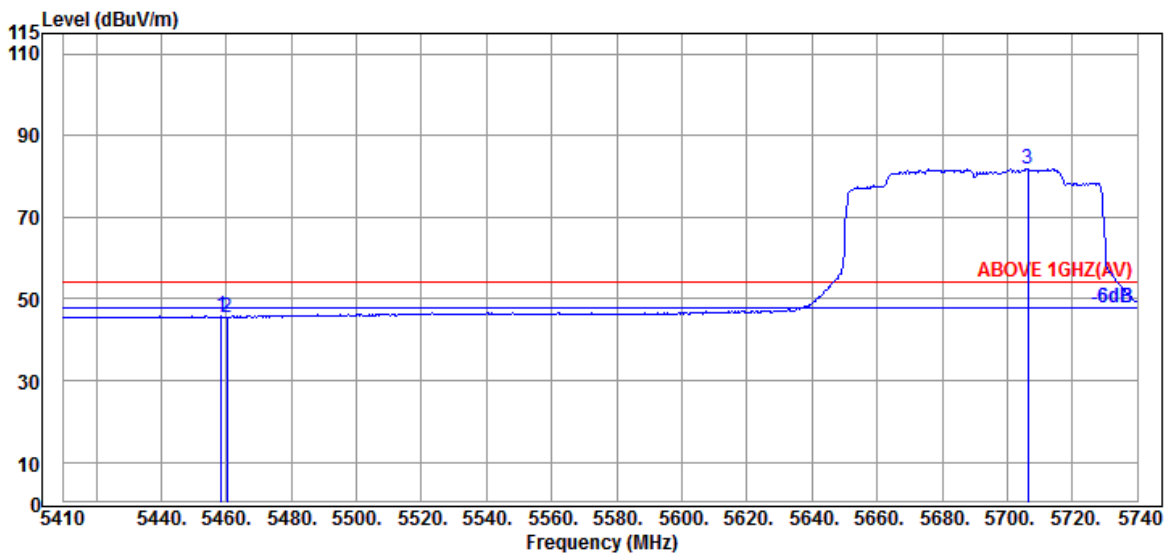


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.60	9.05	34.21	36.36	45.80	54.00	8.20	Average
5460.160	34.60	9.05	34.21	36.04	45.48	54.00	8.52	Average
@ 5706.340	34.80	9.19	34.29	72.07	81.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

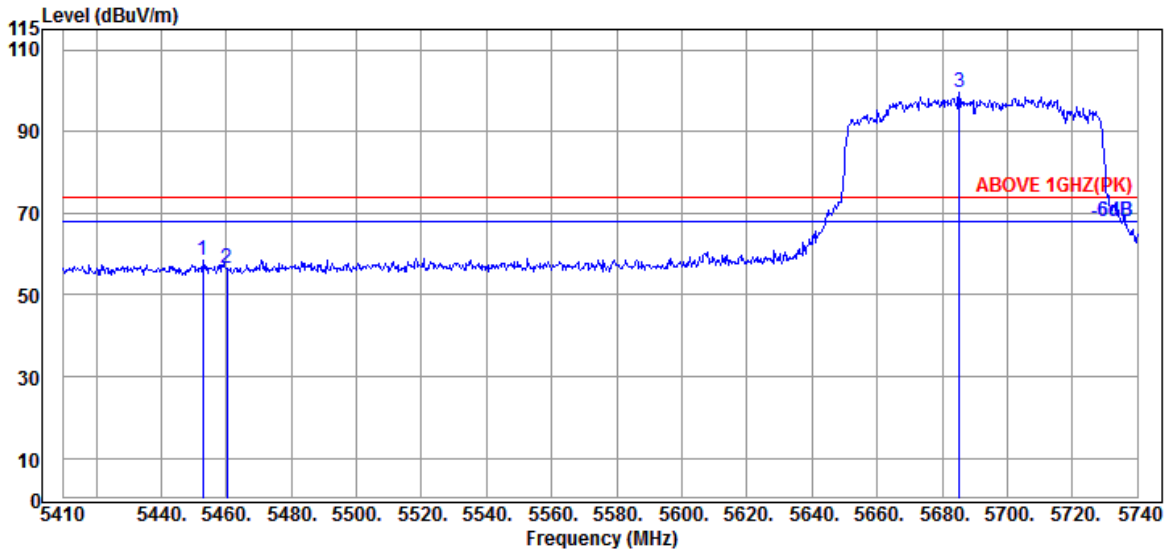

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.900	34.60	9.05	34.21	49.10	58.54	74.00	15.46	Peak
5460.160	34.60	9.05	34.21	47.14	56.58	74.00	17.42	Peak
@ 5685.220	34.63	9.17	34.29	89.99	99.50	---	---	Peak

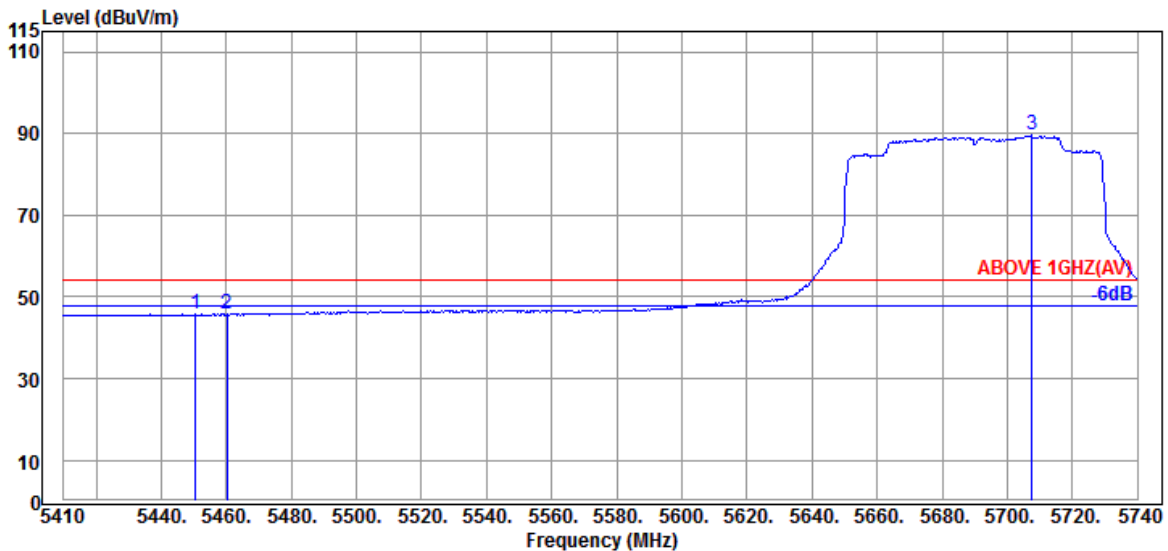


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.60	9.05	34.22	36.41	45.84	54.00	8.16	Average
5460.160	34.60	9.05	34.21	36.29	45.73	54.00	8.27	Average
@ 5707.660	34.80	9.19	34.30	79.88	89.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

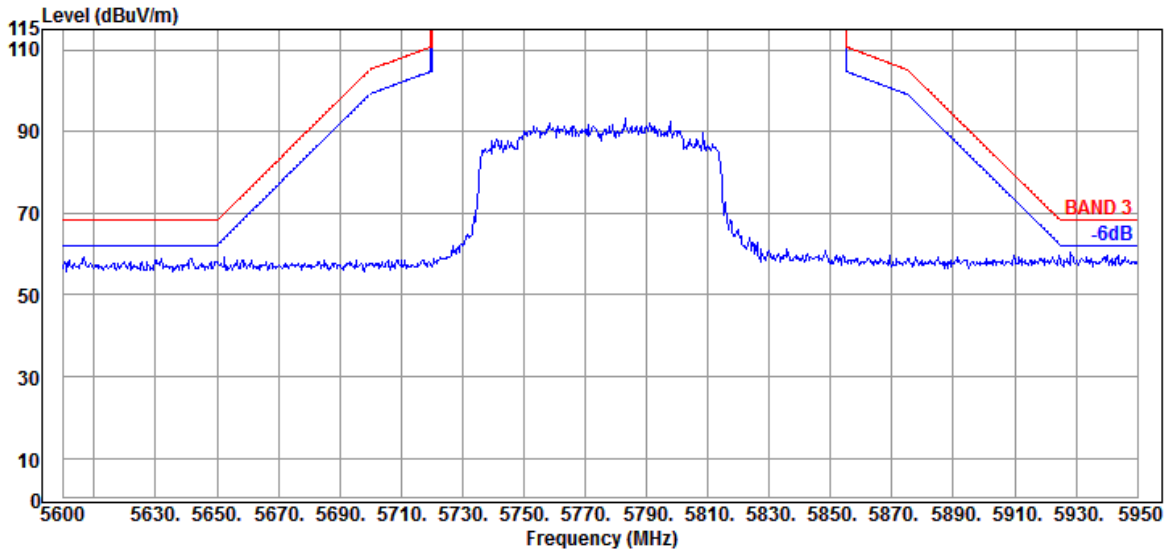

Antenna at Vertical Polarization

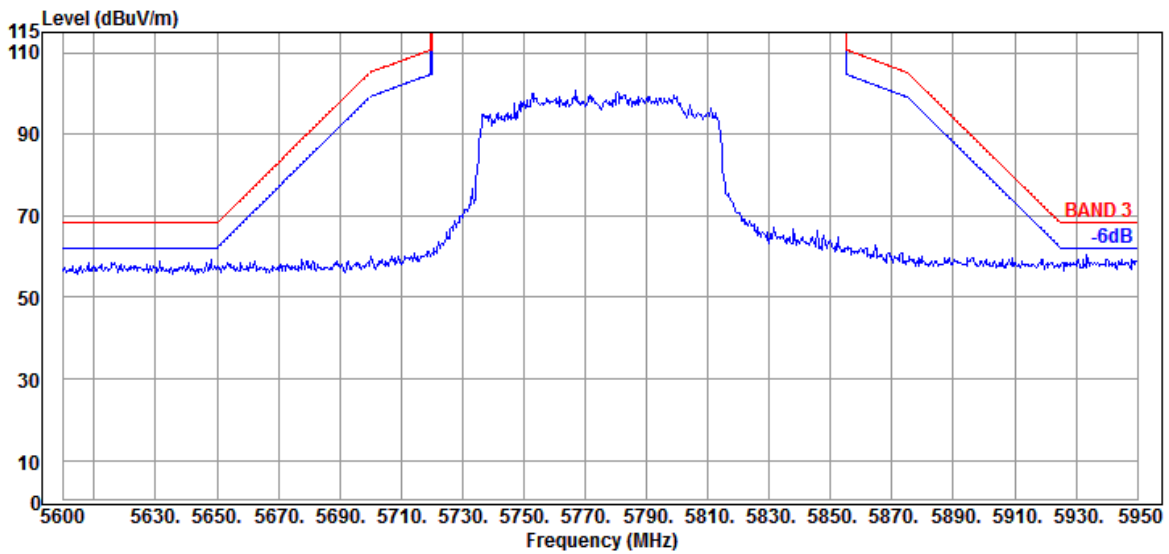


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

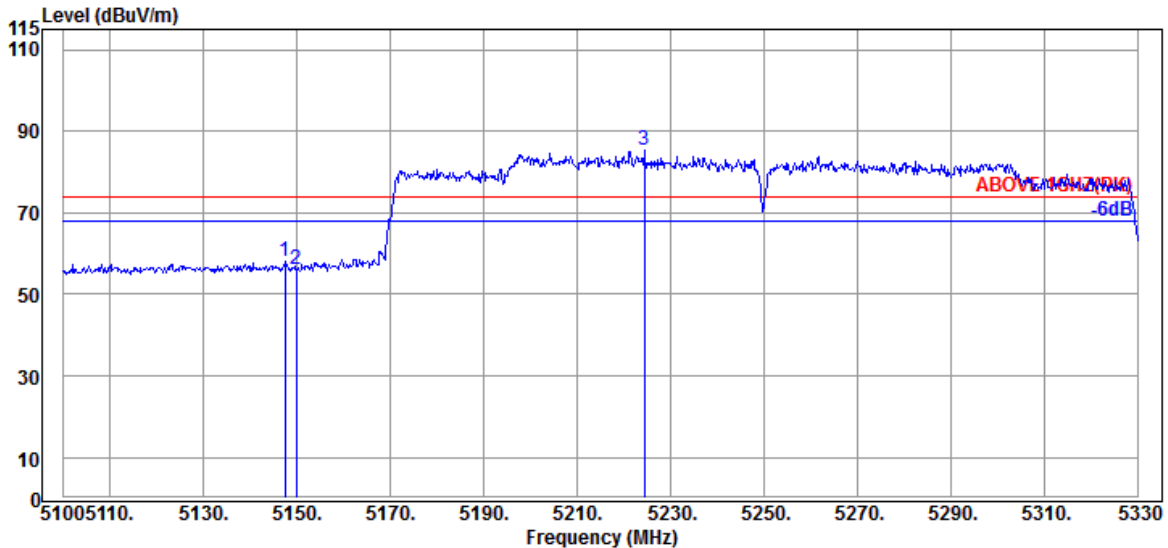

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	34.50	8.88	34.34	49.20	58.24	74.00	15.76	Peak
5149.910	34.50	8.88	34.34	47.27	56.31	74.00	17.69	Peak
@ 5224.430	34.60	8.93	34.30	76.08	85.31	---	---	Peak

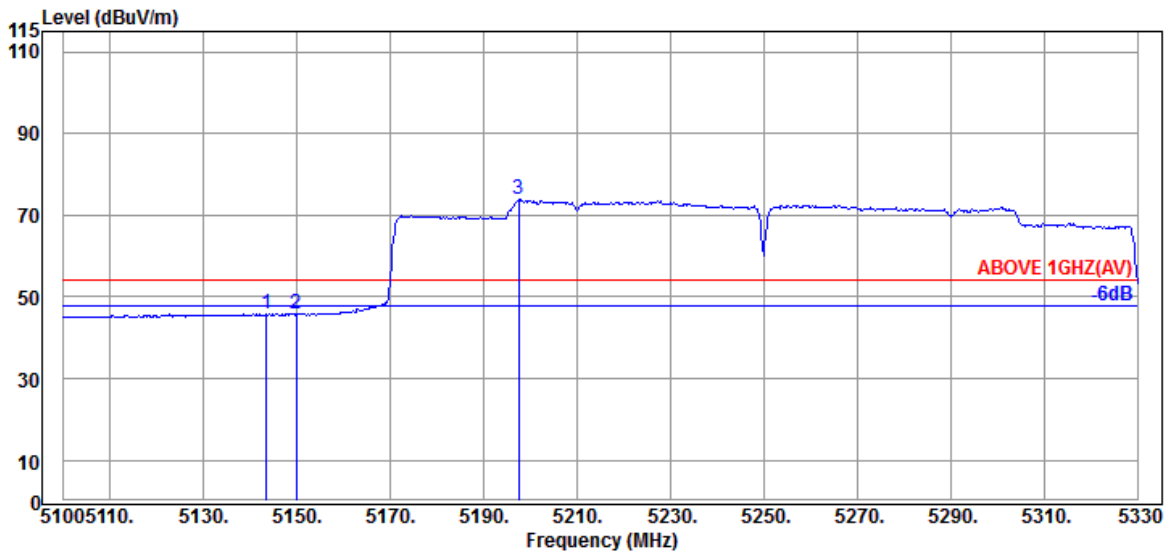


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.470	34.50	8.88	34.34	36.86	45.90	54.00	8.10	Average
5149.910	34.50	8.88	34.34	36.74	45.78	54.00	8.22	Average
@ 5197.520	34.70	8.91	34.32	64.51	73.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

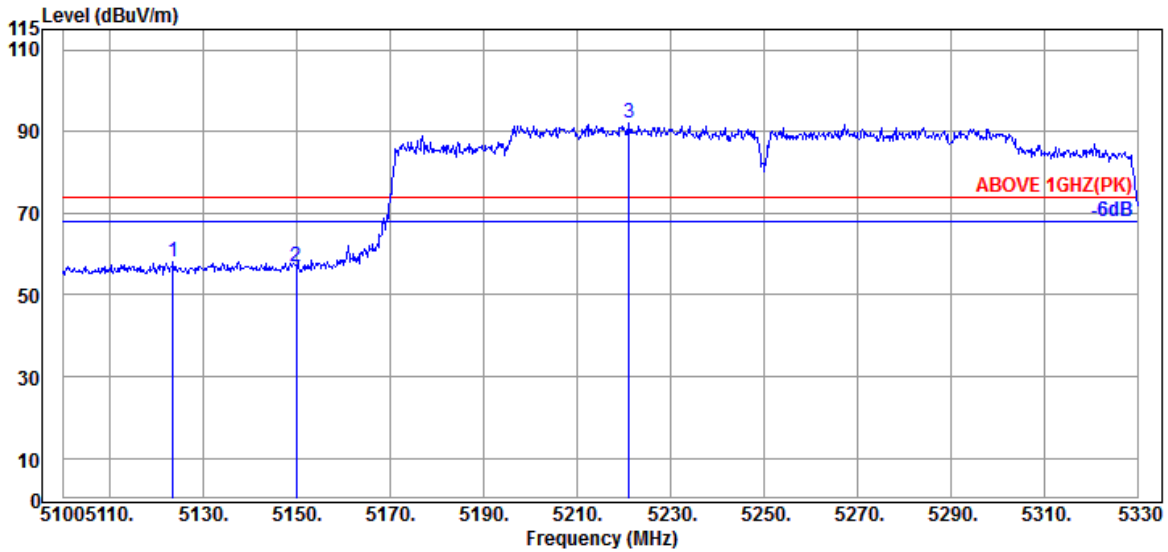

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.460	34.30	8.87	34.34	49.37	58.20	74.00	15.80	Peak
5149.910	34.50	8.88	34.34	47.92	56.96	74.00	17.04	Peak
@ 5221.210	34.60	8.93	34.31	82.90	92.12	---	---	Peak

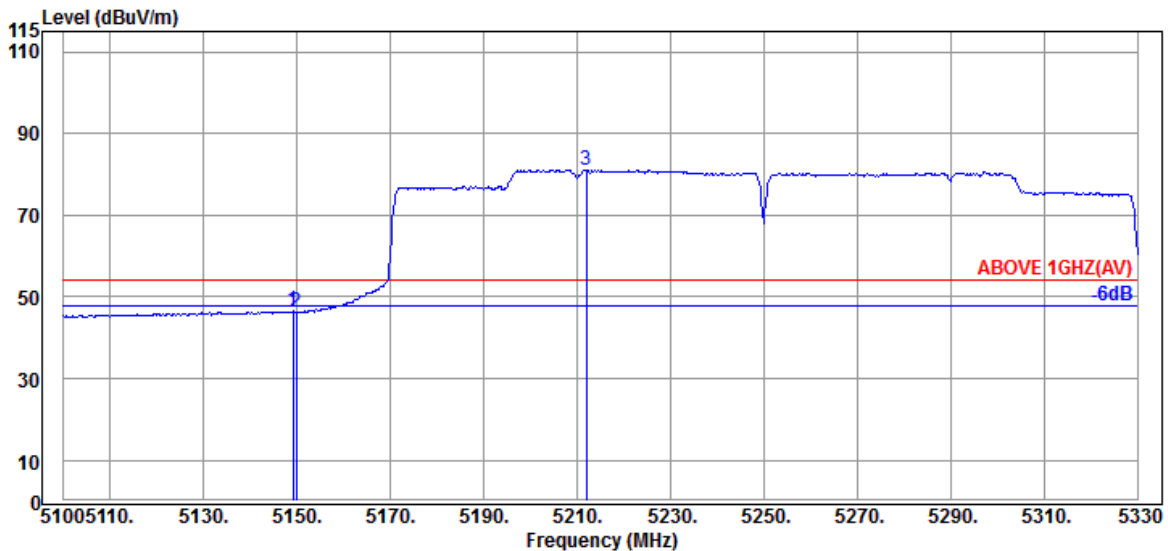


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.50	8.88	34.34	37.43	46.47	54.00	7.53	Average
5149.910	34.50	8.88	34.34	37.06	46.10	54.00	7.90	Average
@ 5212.010	34.65	8.92	34.31	71.85	81.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

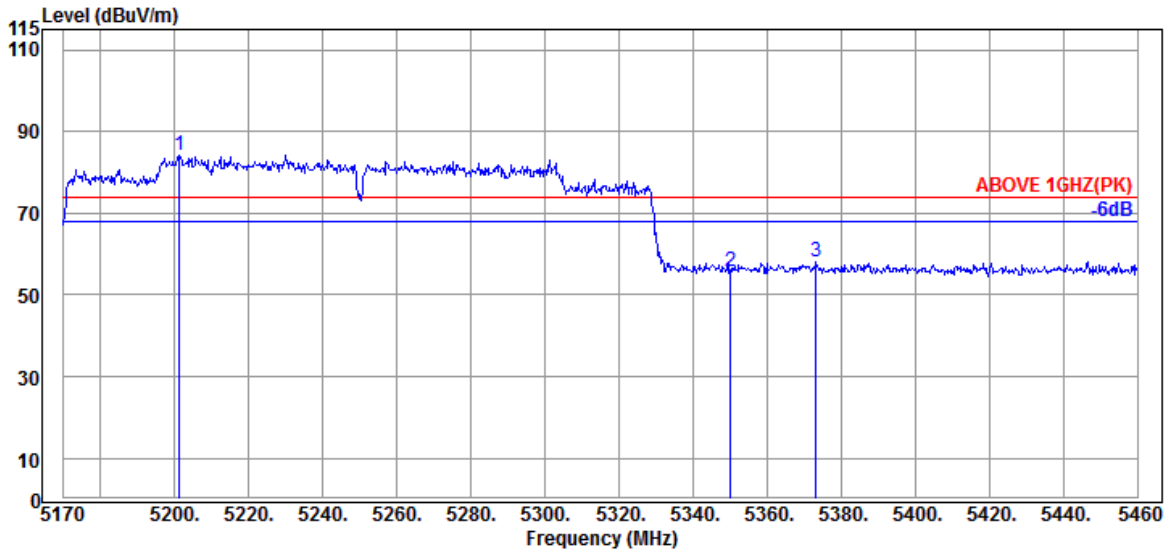

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.320	34.70	8.91	34.32	75.06	84.35	---	---	Peak
5350.090	34.90	8.99	34.26	46.18	55.81	74.00	18.19	Peak
5373.290	34.83	9.01	34.25	48.43	58.02	74.00	15.98	Peak

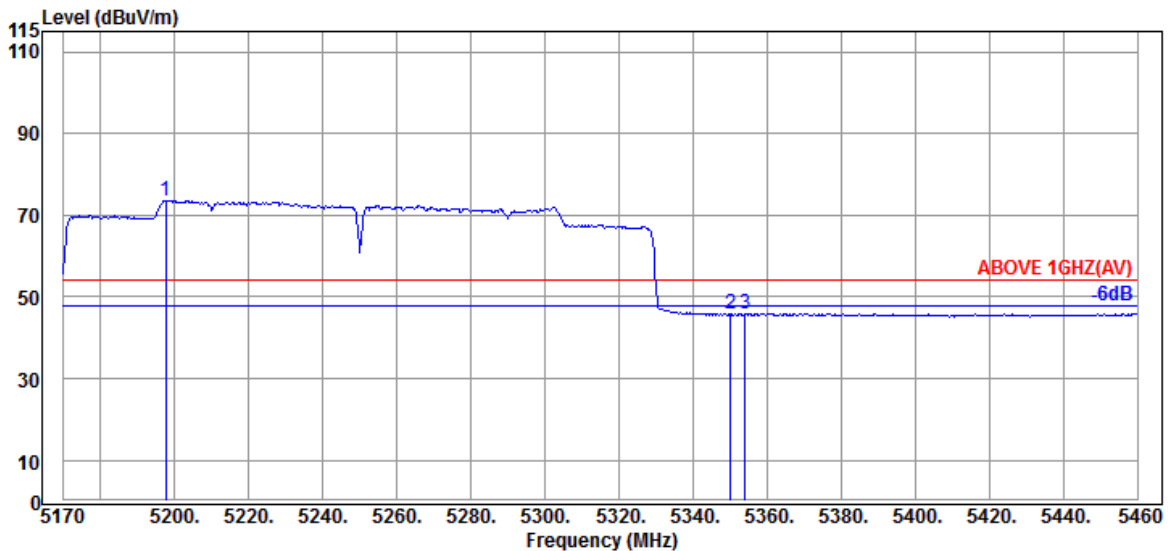


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.550	34.70	8.91	34.32	64.34	73.63	---	---	Average
5350.090	34.90	8.99	34.26	36.09	45.72	54.00	8.28	Average
5354.150	34.87	9.00	34.26	36.27	45.88	54.00	8.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

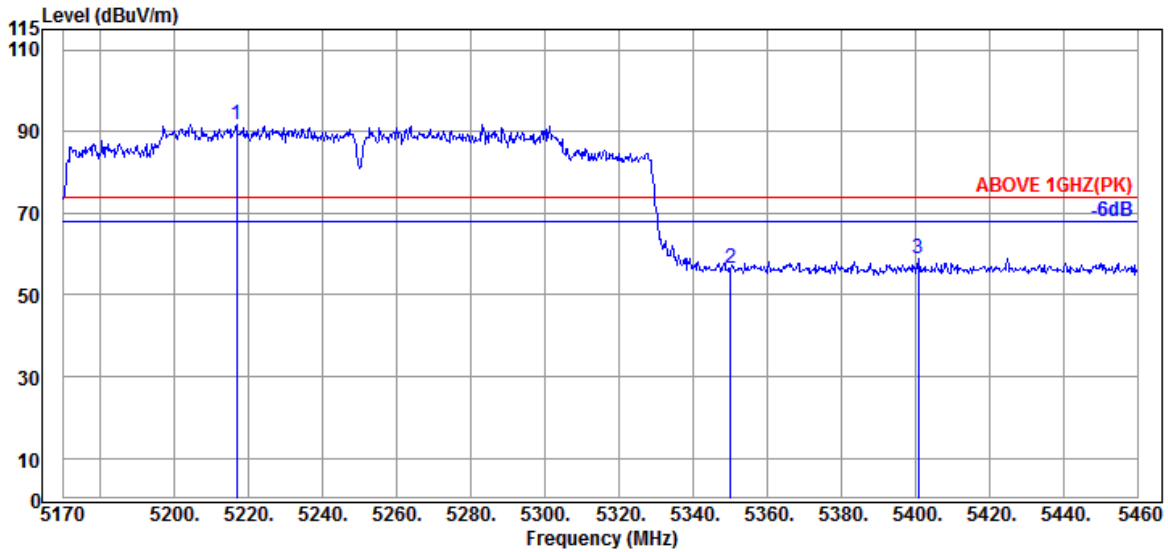

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5216.690	34.60	8.93	34.31	82.65	91.87	---	---	Peak
5350.090	34.90	8.99	34.26	46.88	56.51	74.00	17.49	Peak
5400.840	34.75	9.03	34.23	49.36	58.91	74.00	15.09	Peak

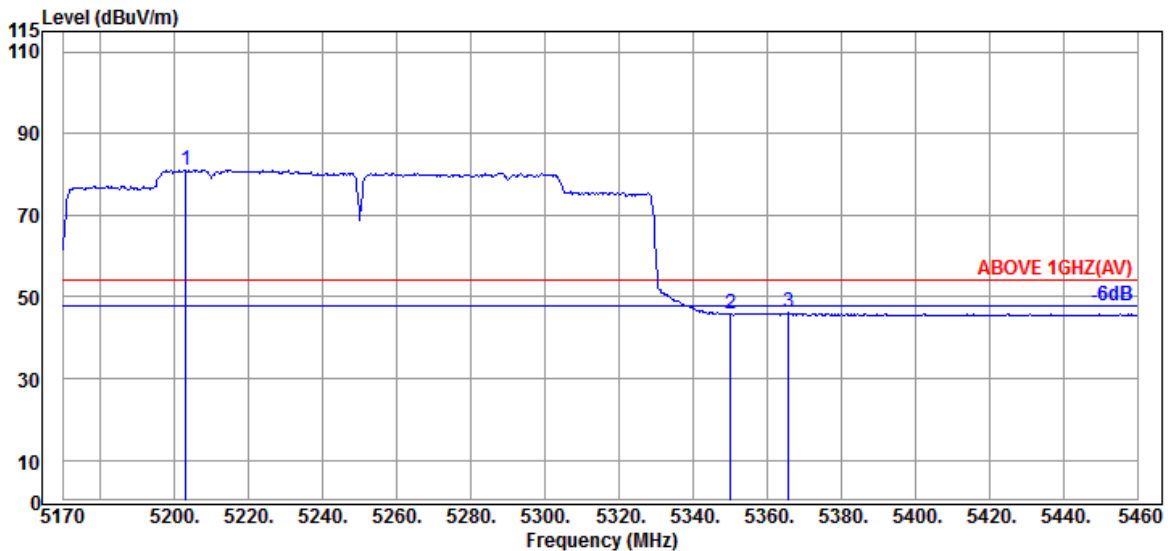


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5203.060	34.65	8.92	34.32	71.89	81.14	---	---	Average
5350.090	34.90	8.99	34.26	36.28	45.91	54.00	8.09	Average
5365.750	34.87	9.00	34.25	36.46	46.08	54.00	7.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

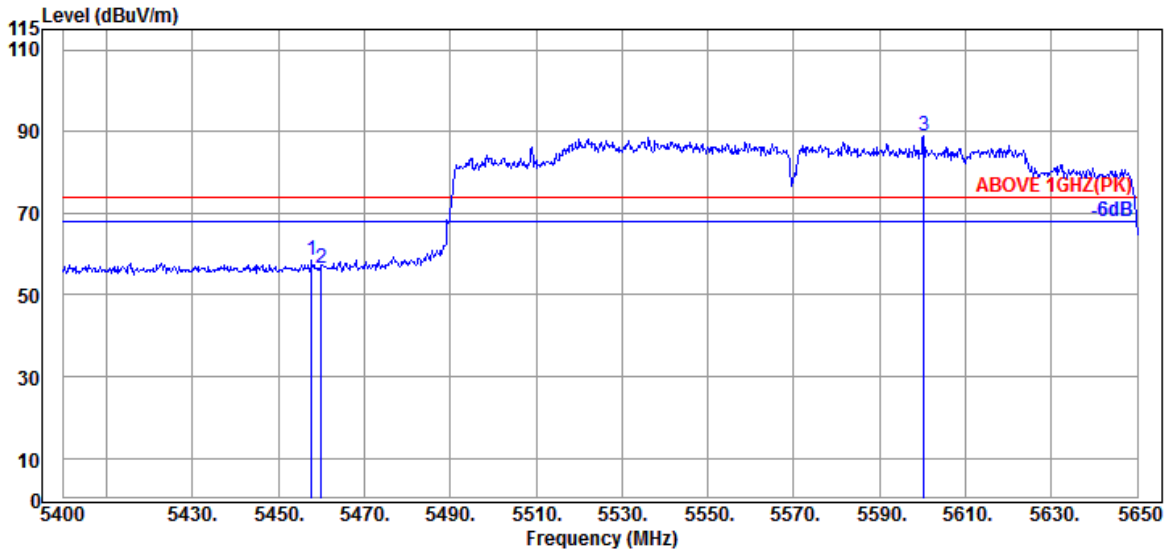

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.750	34.60	9.05	34.21	49.01	58.45	74.00	15.55	Peak
5460.000	34.60	9.05	34.21	47.15	56.59	74.00	17.41	Peak
@ 5600.250	34.40	9.13	34.25	79.66	88.94	---	---	Peak

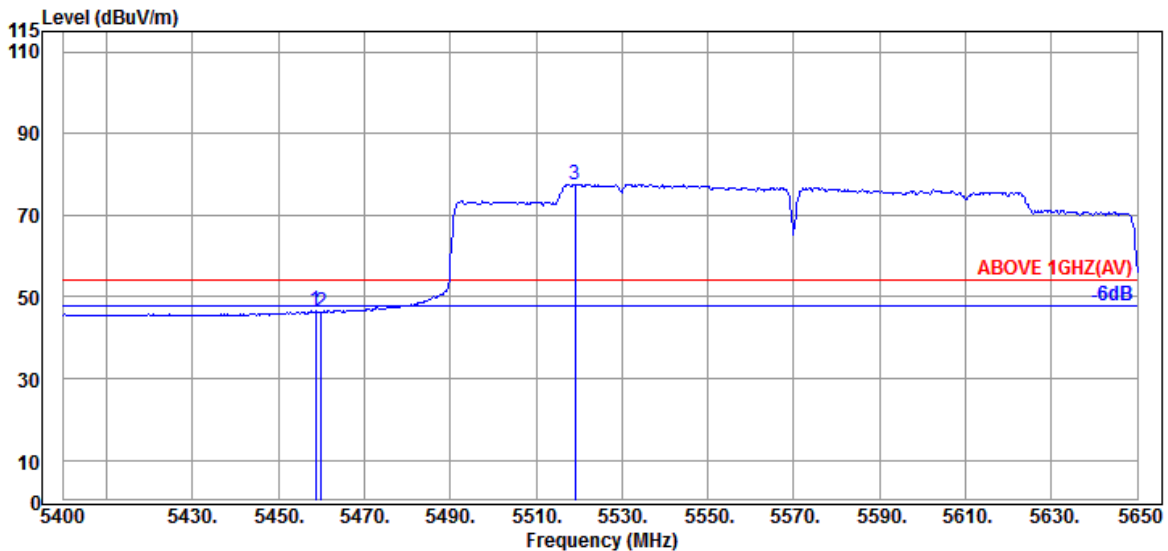


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.60	9.05	34.21	37.01	46.45	54.00	7.55	Average
5460.000	34.60	9.05	34.21	36.92	46.36	54.00	7.64	Average
@ 5519.000	34.70	9.09	34.21	68.07	77.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

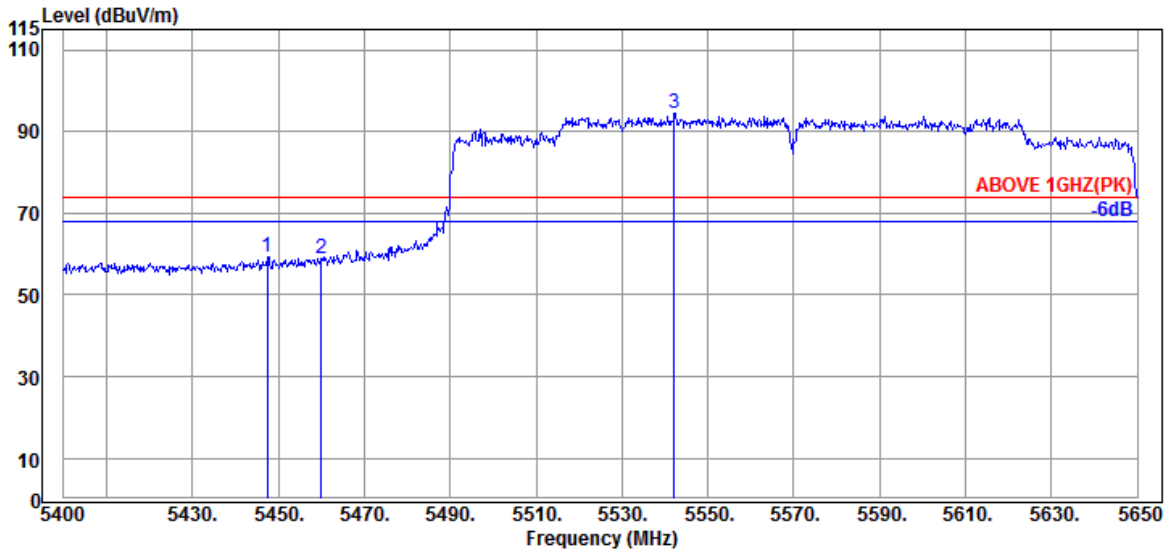

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.65	9.04	34.22	49.89	59.36	74.00	14.64	Peak
5460.000	34.60	9.05	34.21	49.57	59.01	74.00	14.99	Peak
@ 5542.250	34.70	9.09	34.23	84.89	94.45	---	---	Peak

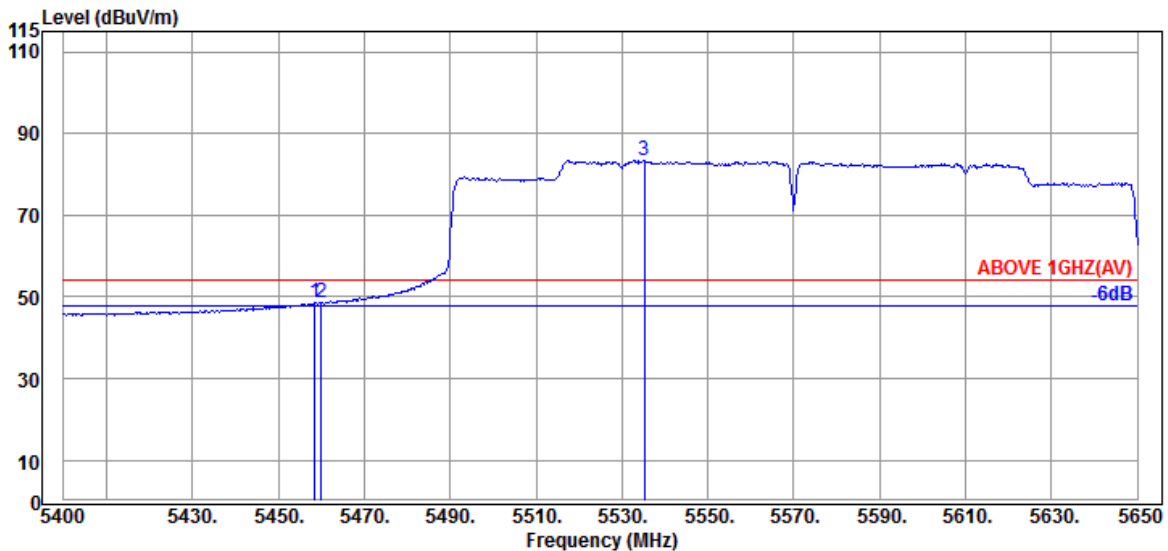


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.60	9.05	34.21	39.15	48.59	54.00	5.41	Average
5460.000	34.60	9.05	34.21	39.03	48.47	54.00	5.53	Average
@ 5535.250	34.70	9.09	34.22	73.86	83.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

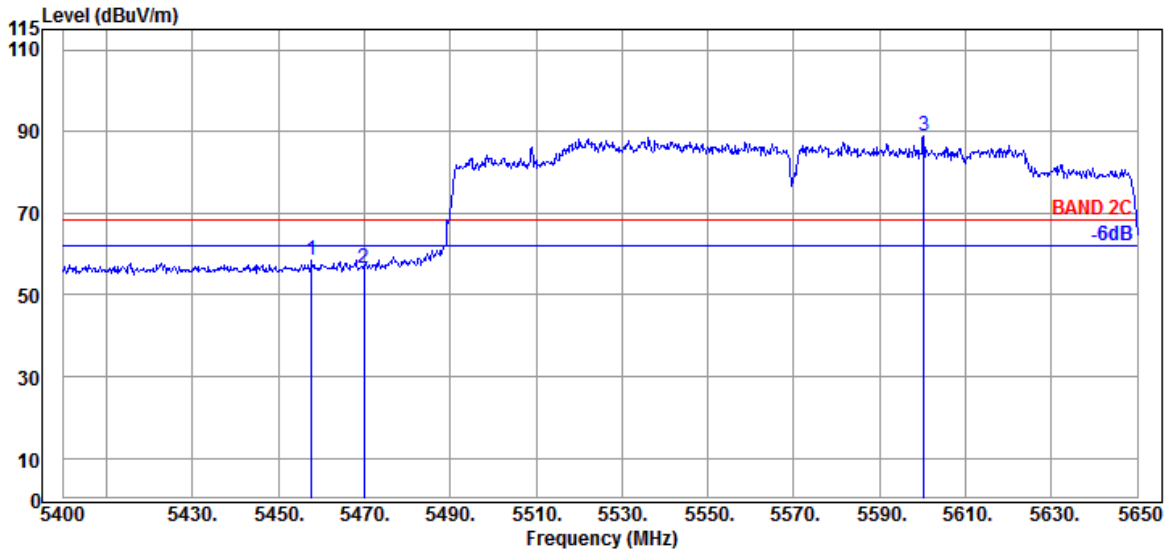

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5457.750	34.60	9.05	34.21	49.01	58.45	68.20	9.75	Peak
5470.000	34.63	9.06	34.21	47.13	56.61	68.20	11.59	Peak
5600.250	34.40	9.13	34.25	79.66	88.94	---	---	Peak

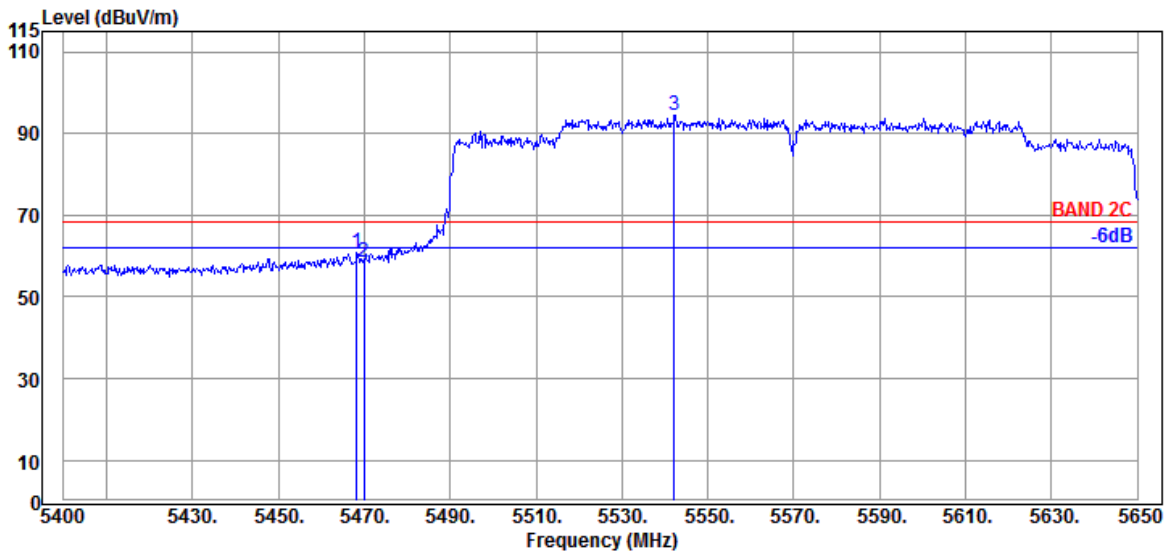


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.250	34.63	9.06	34.21	51.55	61.03	68.20	7.17	Peak
5470.000	34.63	9.06	34.21	49.16	58.64	68.20	9.56	Peak
5542.250	34.70	9.09	34.23	84.89	94.45	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

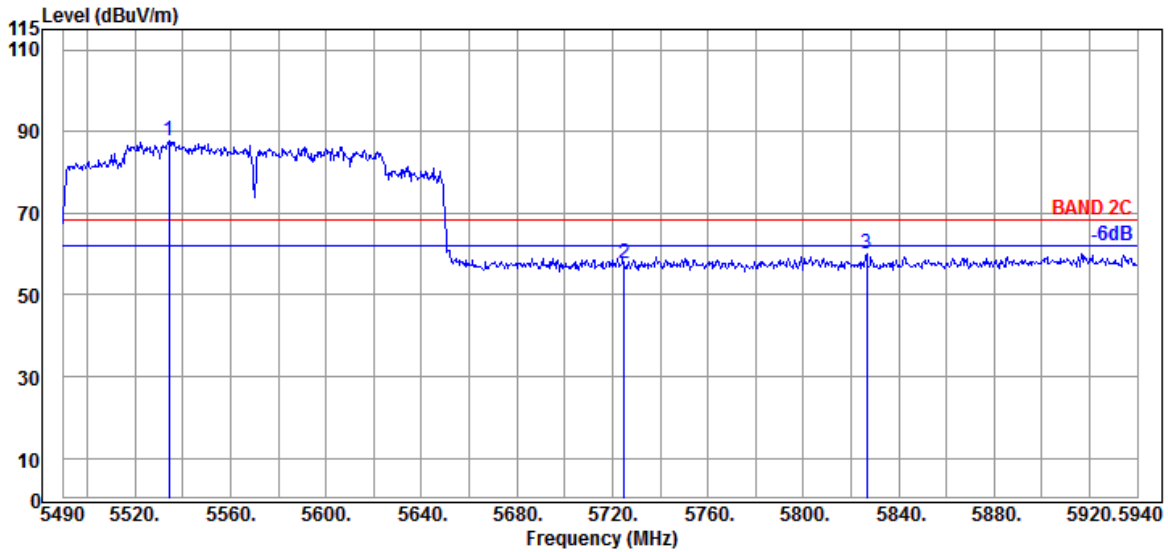

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5534.100	34.70	9.09	34.22	78.00	87.57	---	---	Peak
5724.900	34.90	9.20	34.30	47.93	57.73	68.20	10.47	Peak
5826.600	35.30	9.25	34.35	49.82	60.02	68.20	8.18	Peak

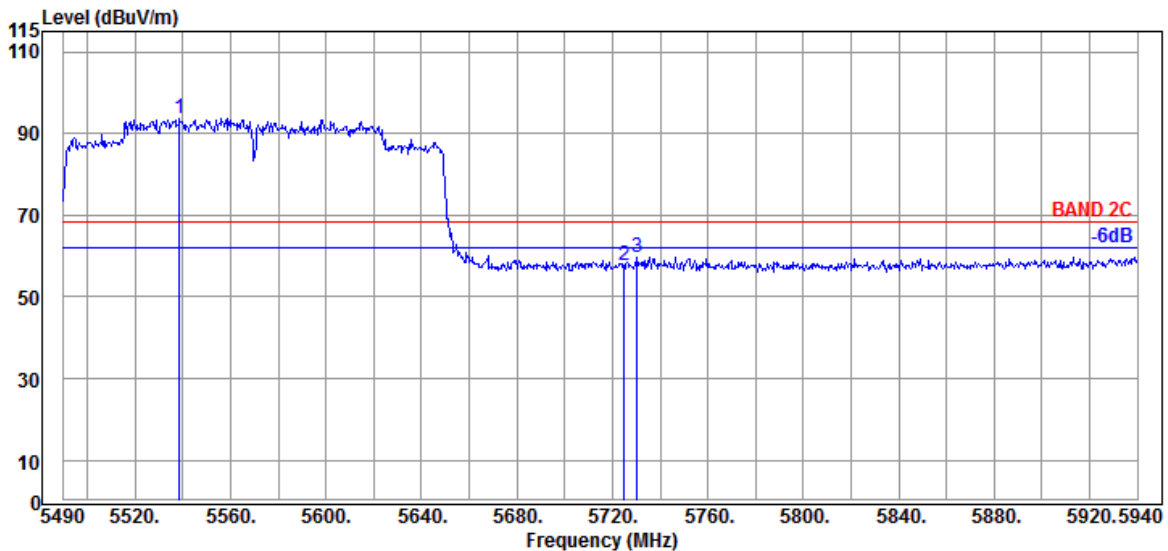


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5538.600	34.70	9.09	34.22	84.08	93.65	---	---	Peak
5724.900	34.90	9.20	34.30	47.98	57.78	68.20	10.42	Peak
5730.300	34.90	9.20	34.31	49.96	59.75	68.20	8.45	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

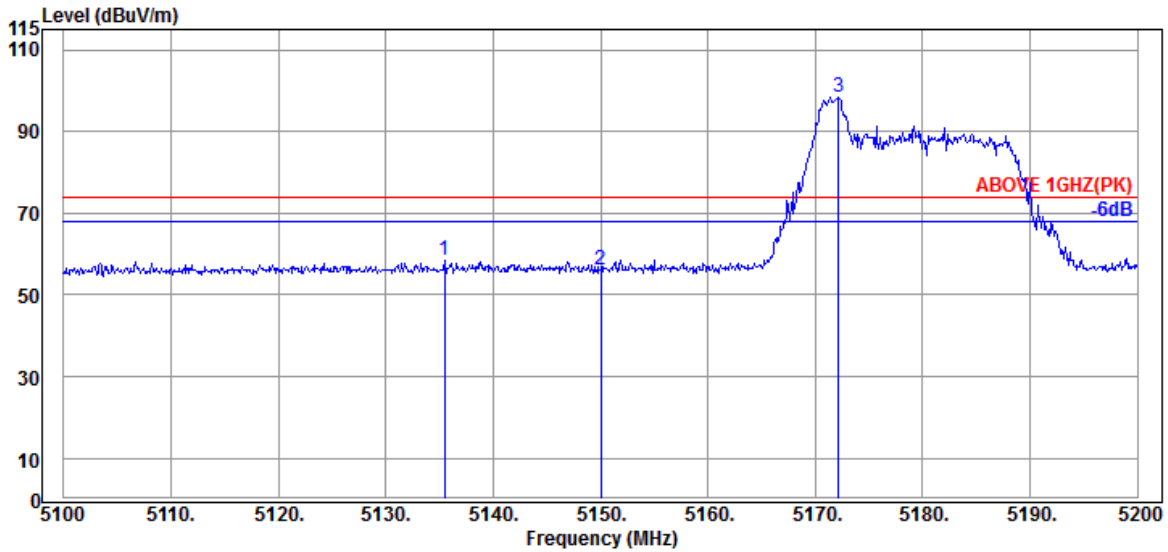

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.500	34.40	8.88	34.34	49.35	58.29	74.00	15.71	Peak
5150.000	34.50	8.88	34.34	47.08	56.12	74.00	17.88	Peak
@ 5172.200	34.63	8.90	34.33	89.11	98.31	---	---	Peak

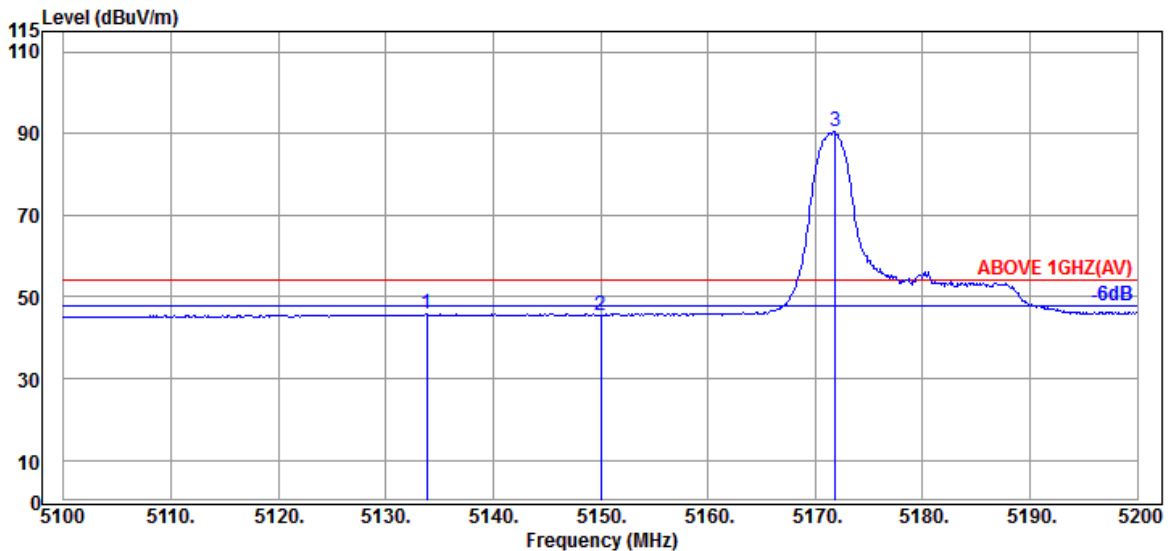


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.800	34.40	8.88	34.34	36.96	45.90	54.00	8.10	Average
5150.000	34.50	8.88	34.34	36.54	45.58	54.00	8.42	Average
@ 5171.900	34.63	8.90	34.33	81.39	90.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

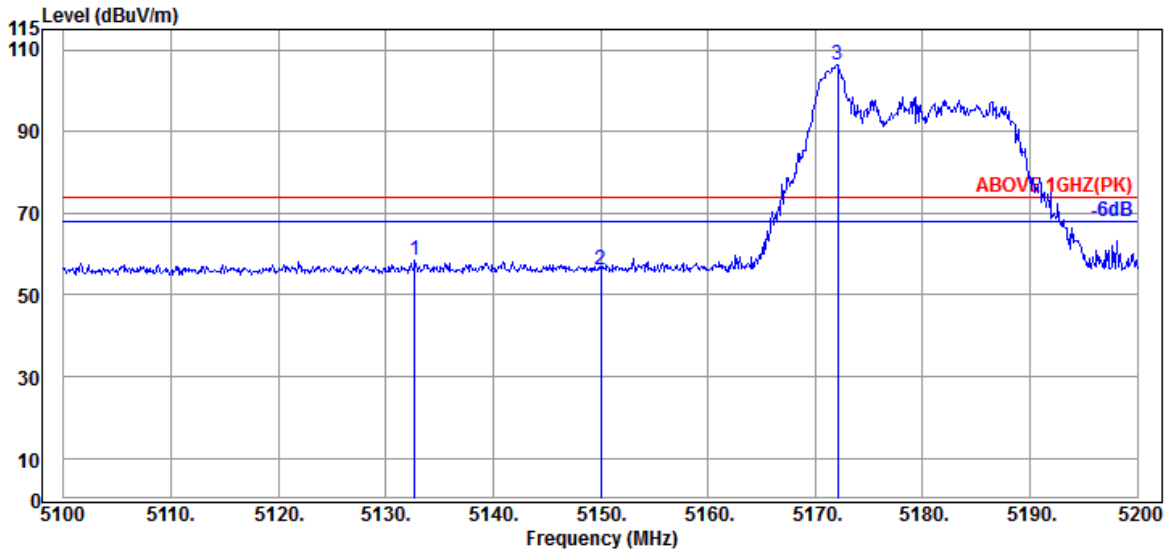

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.700	34.40	8.88	34.34	49.37	58.31	74.00	15.69	Peak
5150.000	34.50	8.88	34.34	47.08	56.12	74.00	17.88	Peak
@ 5172.100	34.63	8.90	34.33	97.17	106.37	---	---	Peak

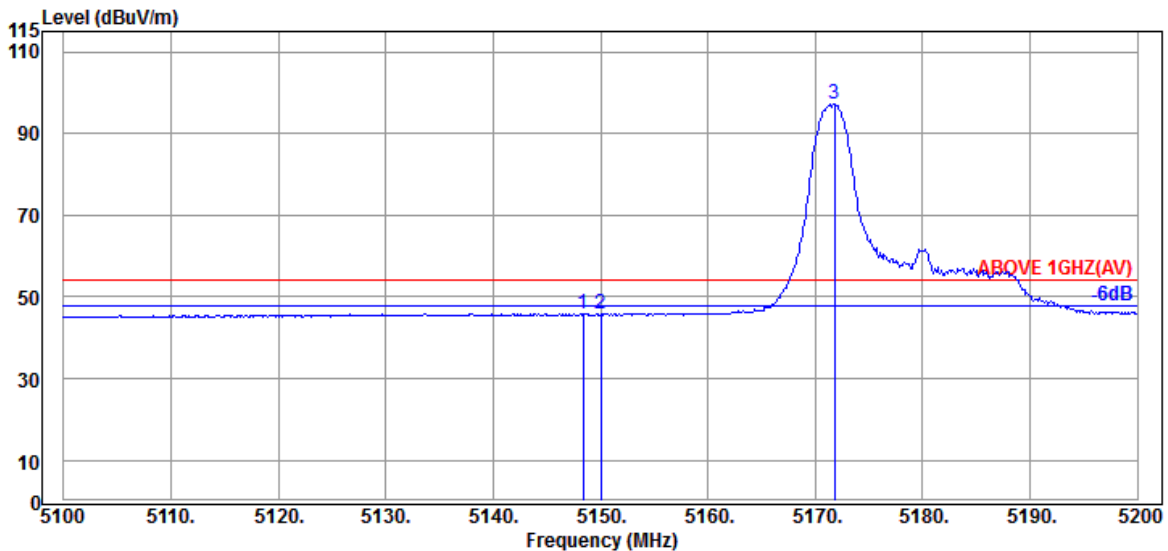


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.50	8.88	34.34	36.78	45.82	54.00	8.18	Average
5150.000	34.50	8.88	34.34	36.70	45.74	54.00	8.26	Average
@ 5171.800	34.63	8.90	34.33	88.03	97.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

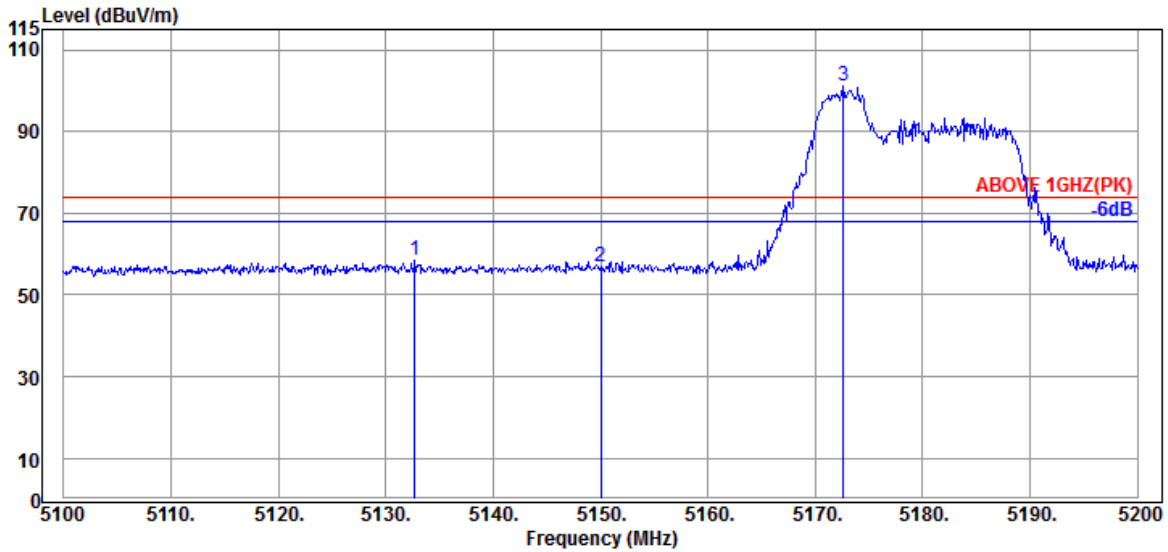

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.700	34.40	8.88	34.34	49.73	58.67	74.00	15.33	Peak
5150.000	34.50	8.88	34.34	47.73	56.77	74.00	17.23	Peak
@ 5172.600	34.63	8.90	34.33	91.82	101.02	---	---	Peak

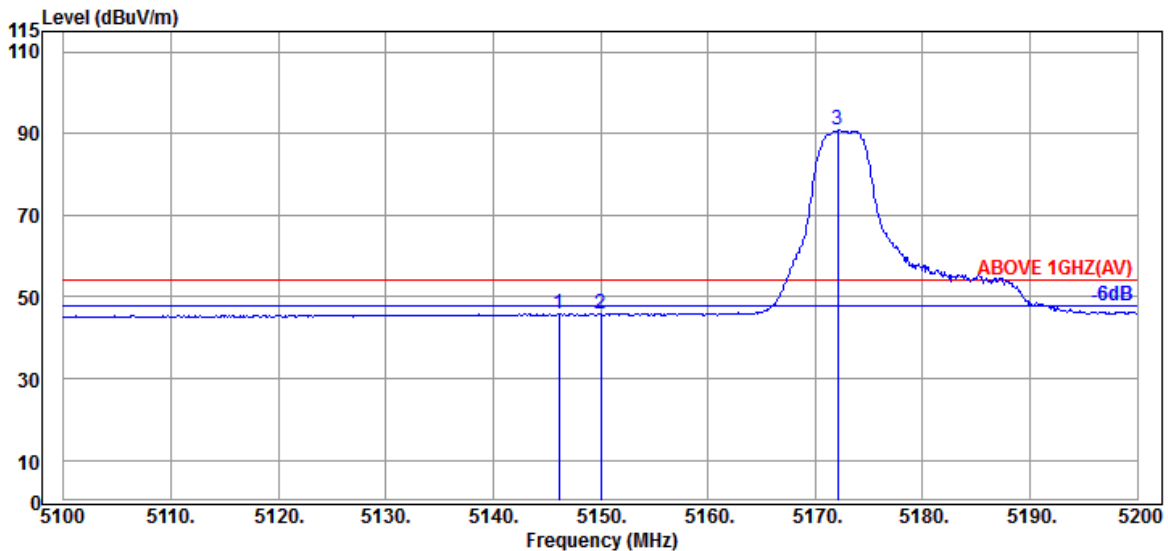


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	34.50	8.88	34.34	36.95	45.99	54.00	8.01	Average
5150.000	34.50	8.88	34.34	36.62	45.66	54.00	8.34	Average
@ 5172.100	34.63	8.90	34.33	81.69	90.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

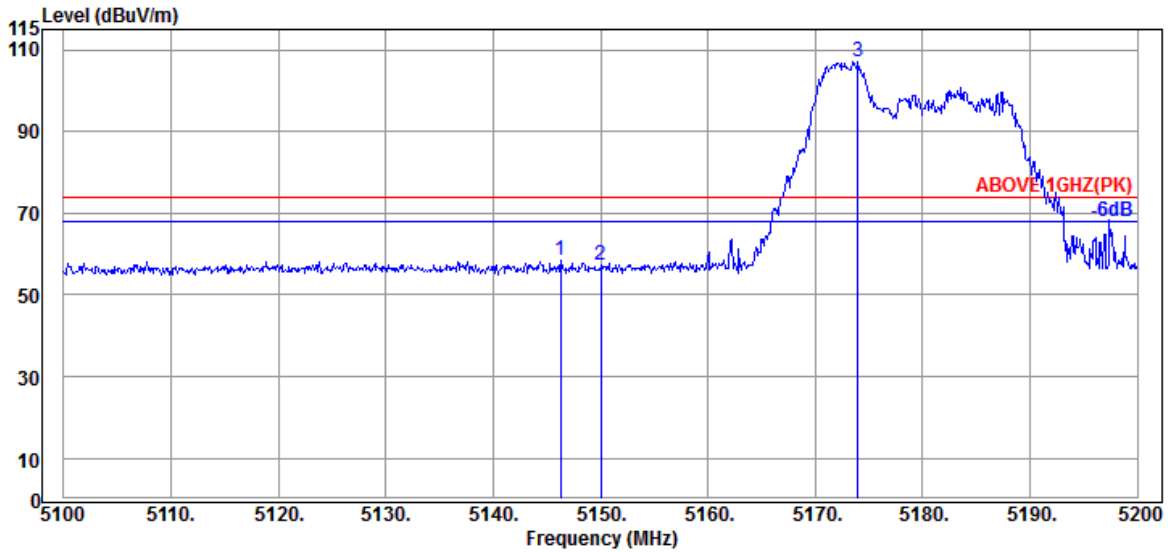

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	34.50	8.88	34.34	49.60	58.64	74.00	15.36	Peak
5150.000	34.50	8.88	34.34	48.07	57.11	74.00	16.89	Peak
@ 5174.000	34.63	8.90	34.32	97.88	107.09	---	---	Peak

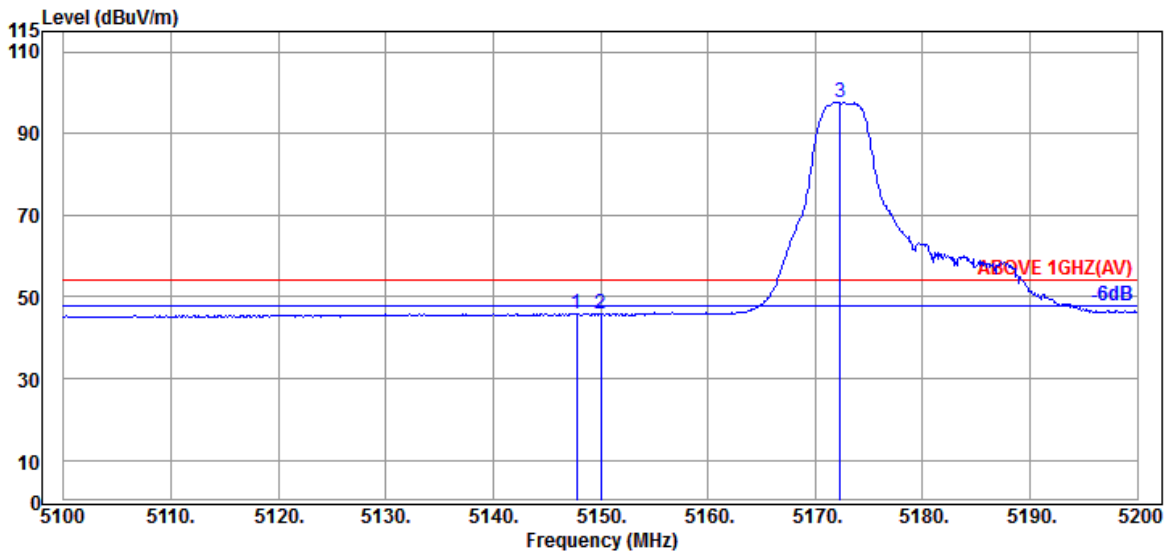


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.50	8.88	34.34	36.84	45.88	54.00	8.12	Average
5150.000	34.50	8.88	34.34	36.61	45.65	54.00	8.35	Average
@ 5172.300	34.63	8.90	34.33	88.39	97.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

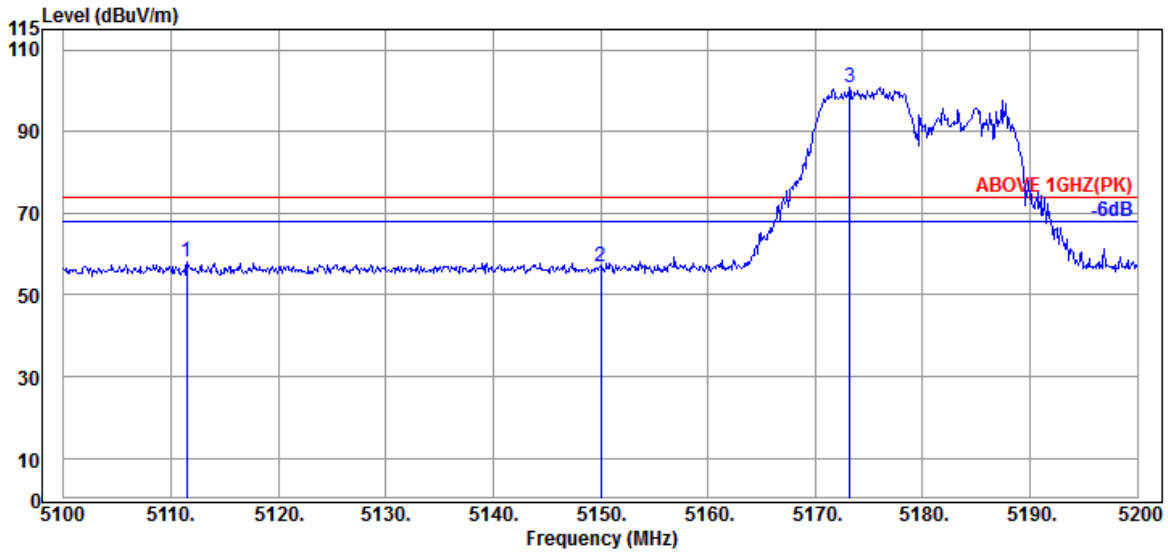

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.500	34.20	8.86	34.35	49.32	58.03	74.00	15.97	Peak
5150.000	34.50	8.88	34.34	48.06	57.10	74.00	16.90	Peak
@ 5173.200	34.63	8.90	34.32	91.56	100.77	---	---	Peak

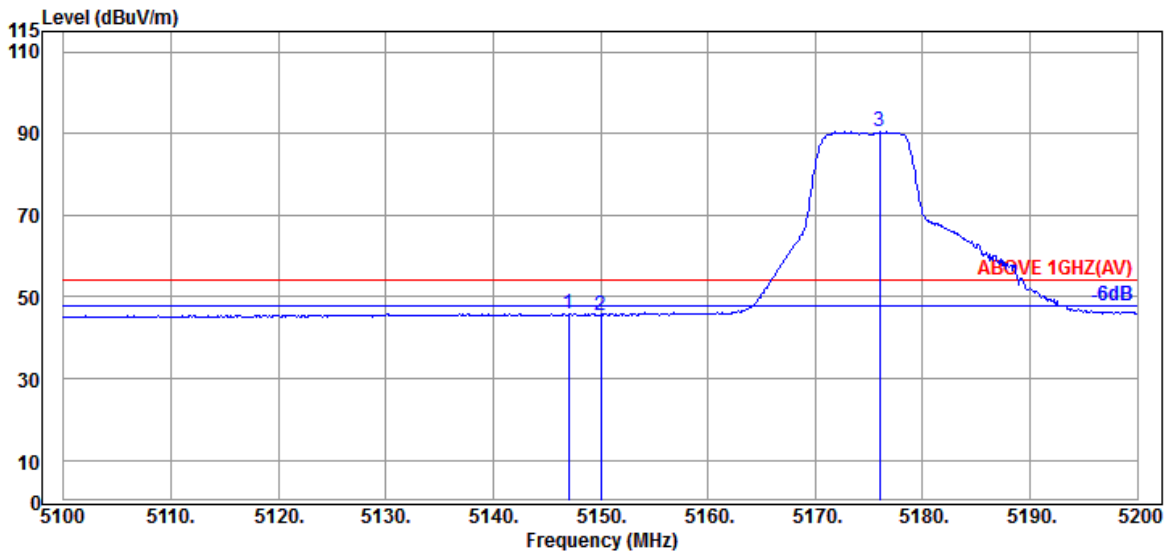


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	34.50	8.88	34.34	36.87	45.91	54.00	8.09	Average
5150.000	34.50	8.88	34.34	36.49	45.53	54.00	8.47	Average
@ 5176.000	34.63	8.90	34.32	81.14	90.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

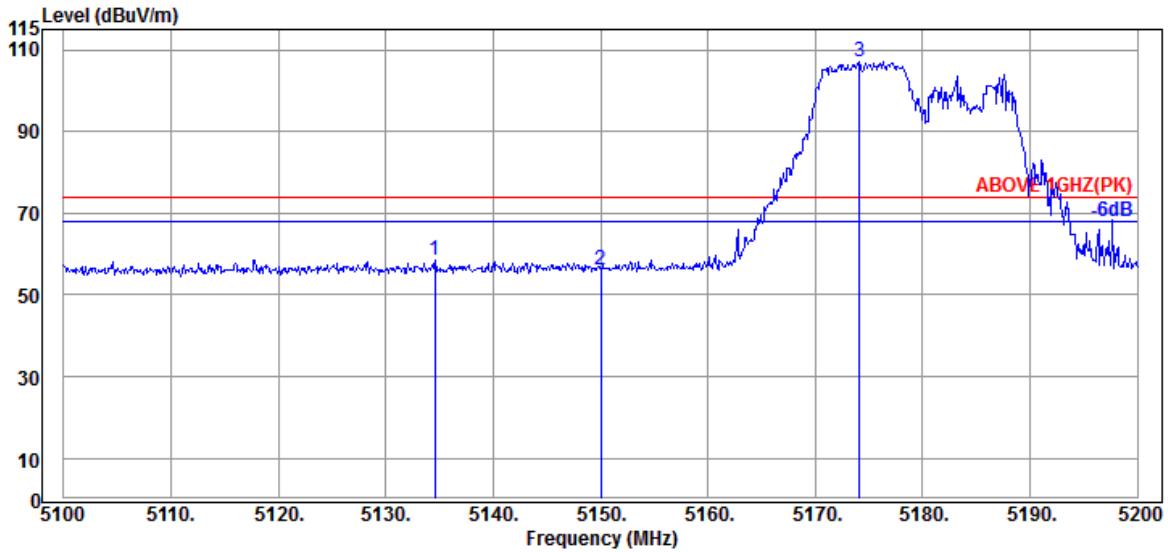

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.600	34.40	8.88	34.34	49.71	58.65	74.00	15.35	Peak
5150.000	34.50	8.88	34.34	47.03	56.07	74.00	17.93	Peak
@ 5174.100	34.63	8.90	34.32	97.92	107.13	---	---	Peak

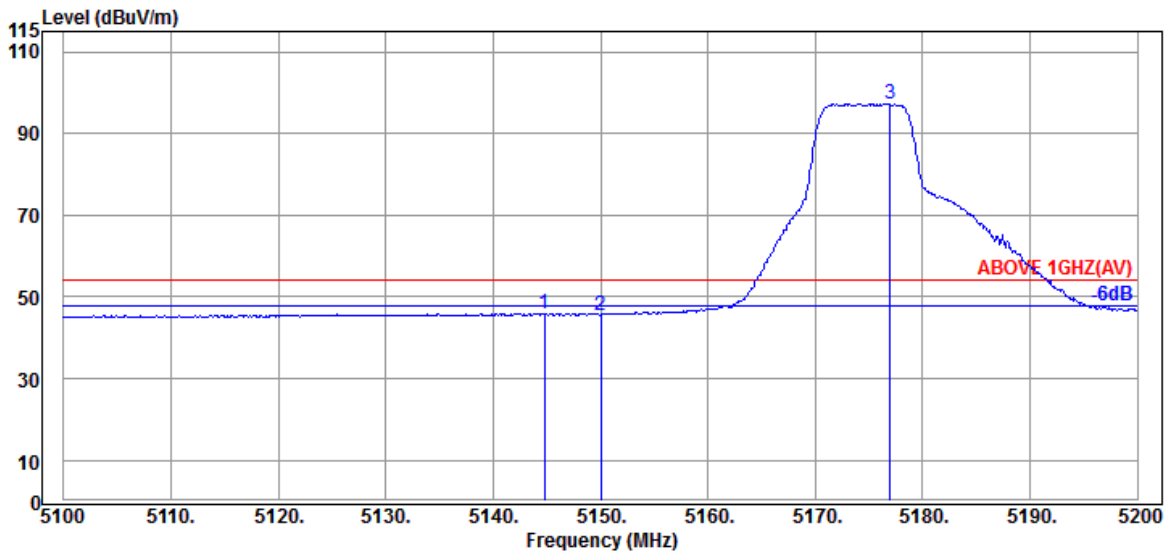


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	34.50	8.88	34.34	36.94	45.98	54.00	8.02	Average
5150.000	34.50	8.88	34.34	36.60	45.64	54.00	8.36	Average
@ 5177.000	34.63	8.90	34.32	88.01	97.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

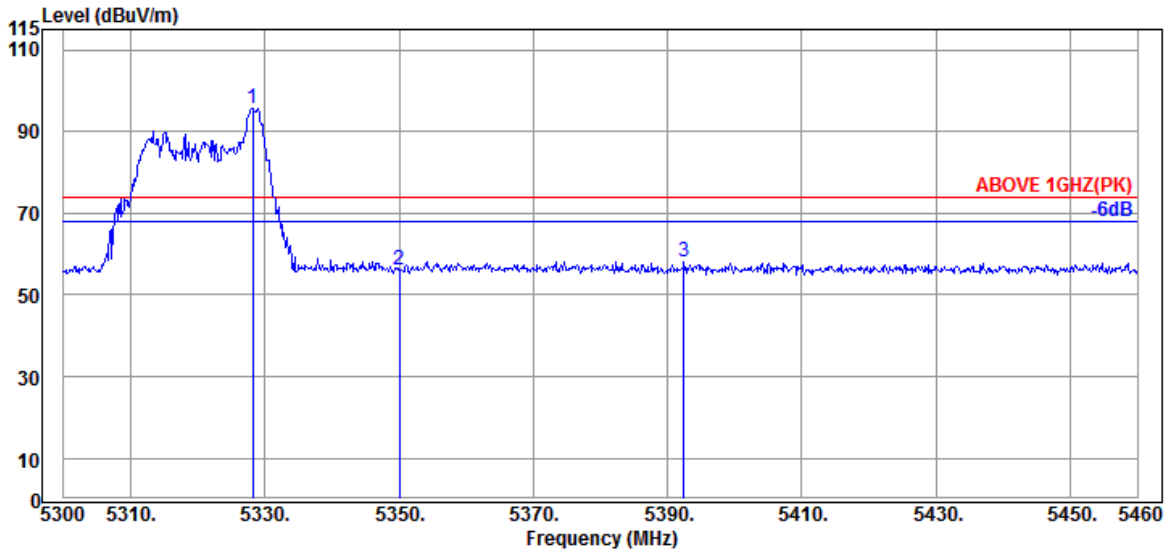

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	86.27	95.73	---	---	Peak
5350.080	34.90	8.99	34.26	46.43	56.06	74.00	17.94	Peak
5392.480	34.80	9.02	34.24	48.65	58.23	74.00	15.77	Peak

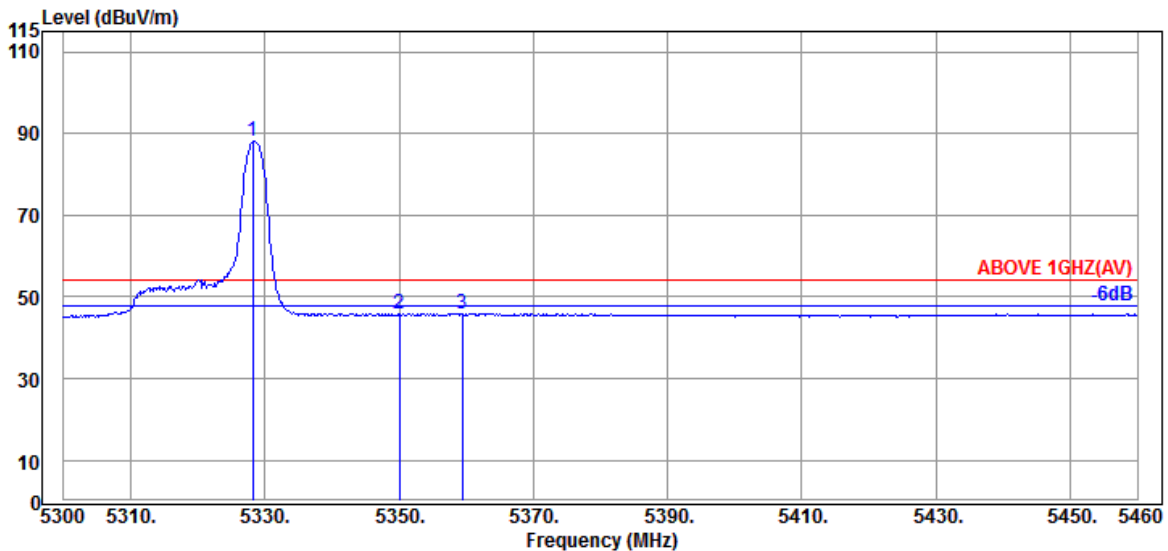

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	78.61	88.07	---	---	Average
5350.080	34.90	8.99	34.26	36.10	45.73	54.00	8.27	Average
5359.360	34.87	9.00	34.26	36.32	45.93	54.00	8.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

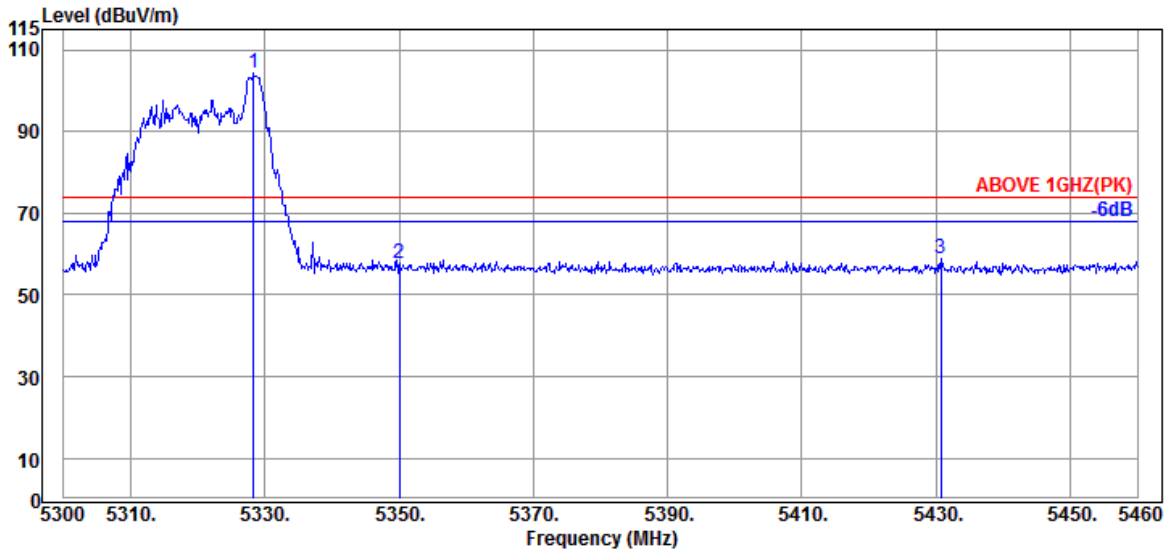

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.73	8.99	34.26	94.70	104.16	---	---	Peak
5350.080	34.90	8.99	34.26	48.22	57.85	74.00	16.15	Peak
5430.720	34.70	9.04	34.23	49.24	58.75	74.00	15.25	Peak

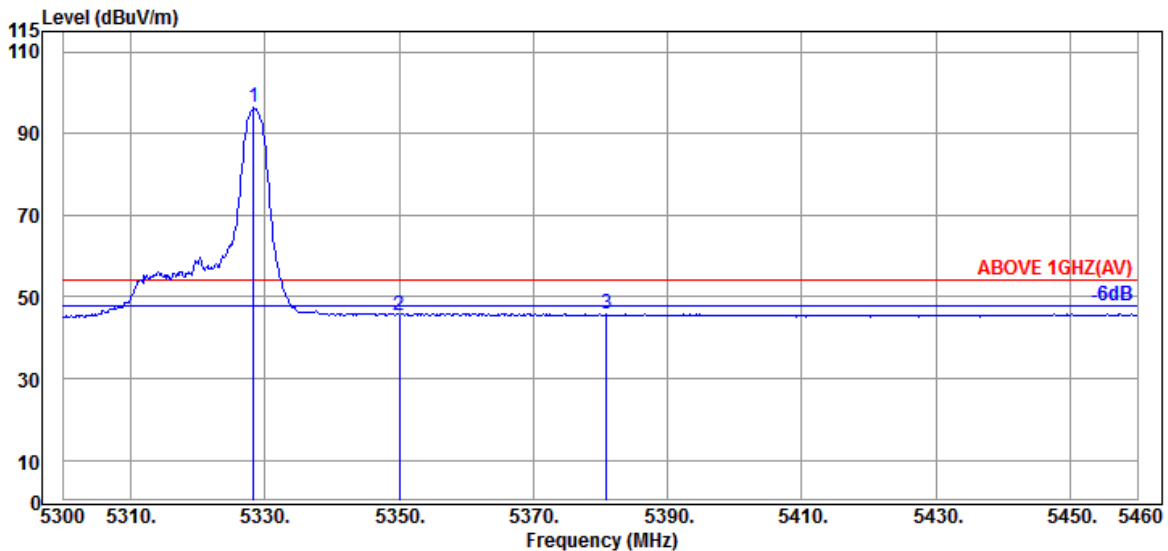

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.73	8.99	34.26	86.86	96.32	---	---	Average
5350.080	34.90	8.99	34.26	36.00	45.63	54.00	8.37	Average
5380.960	34.83	9.01	34.24	36.36	45.96	54.00	8.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

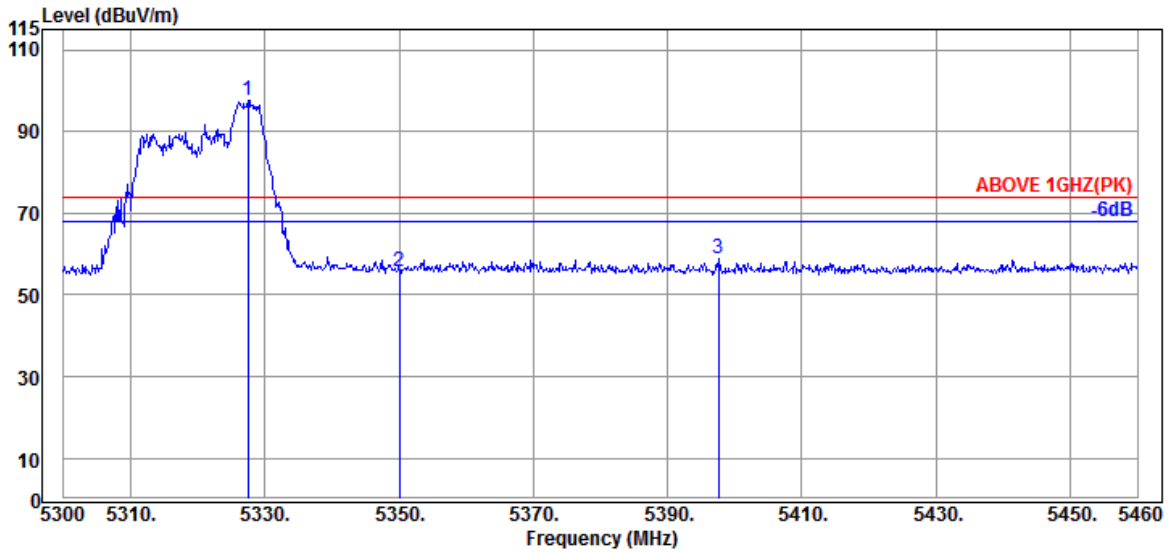

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	34.73	8.99	34.27	88.30	97.75	---	---	Peak
5350.080	34.90	8.99	34.26	46.10	55.73	74.00	18.27	Peak
5397.600	34.80	9.02	34.24	49.42	59.00	74.00	15.00	Peak

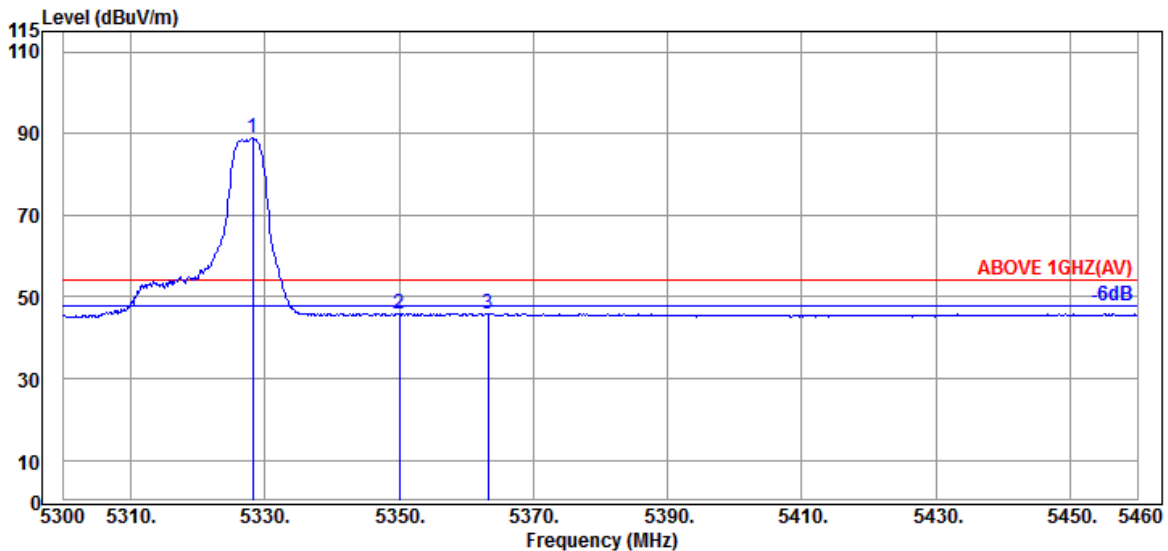

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	79.41	88.87	---	---	Average
5350.080	34.90	8.99	34.26	36.02	45.65	54.00	8.35	Average
5363.200	34.87	9.00	34.25	36.25	45.87	54.00	8.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

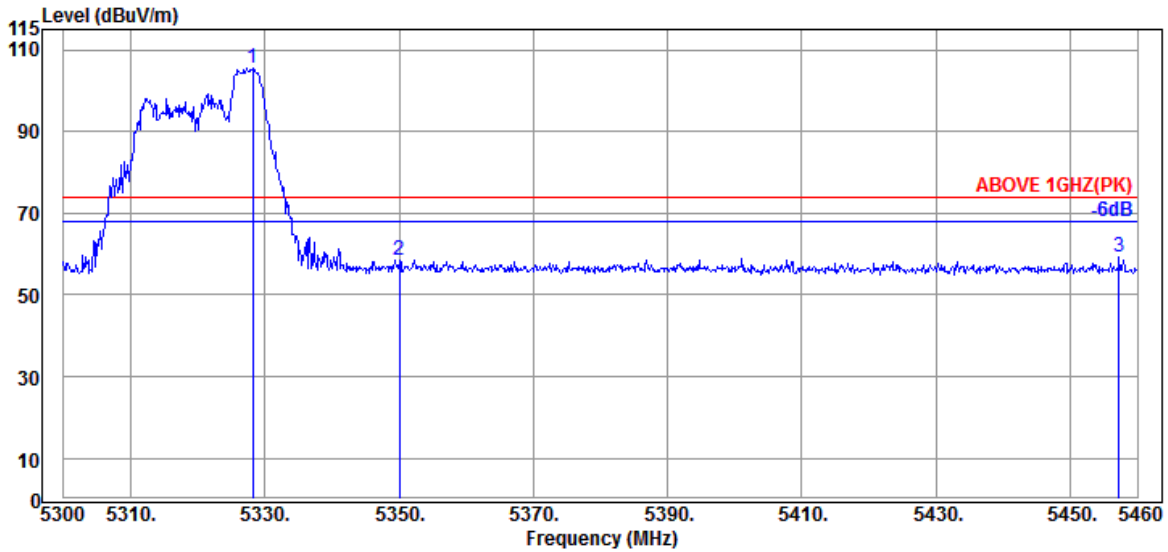

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	96.11	105.57	---	---	Peak
5350.080	34.90	8.99	34.26	48.93	58.56	74.00	15.44	Peak
5457.280	34.60	9.05	34.21	49.73	59.17	74.00	14.83	Peak

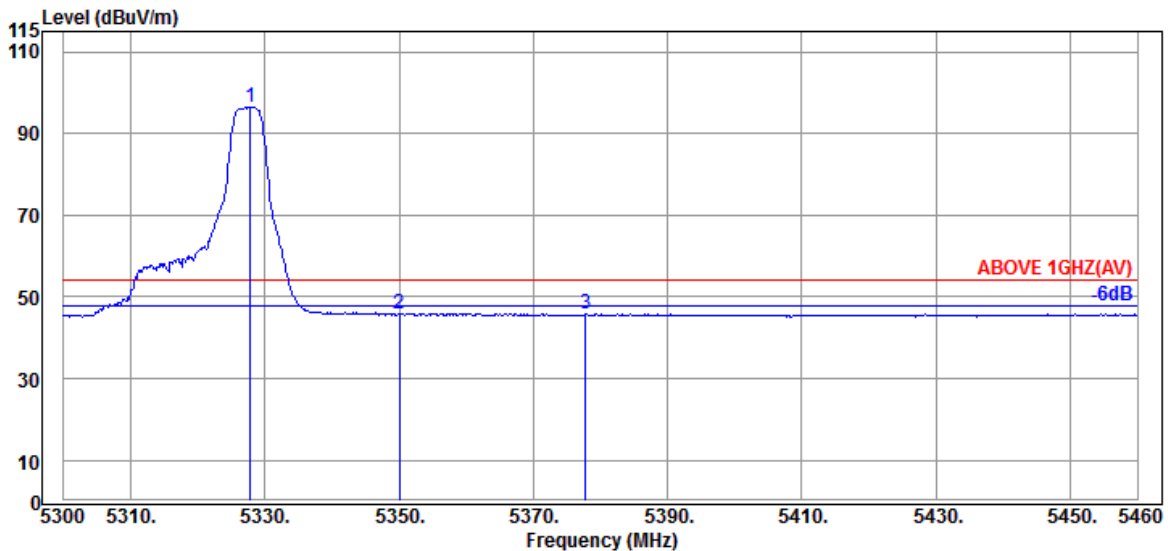

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.73	8.99	34.27	87.10	96.55	---	---	Average
5350.080	34.90	8.99	34.26	36.11	45.74	54.00	8.26	Average
5377.760	34.83	9.01	34.25	36.36	45.95	54.00	8.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

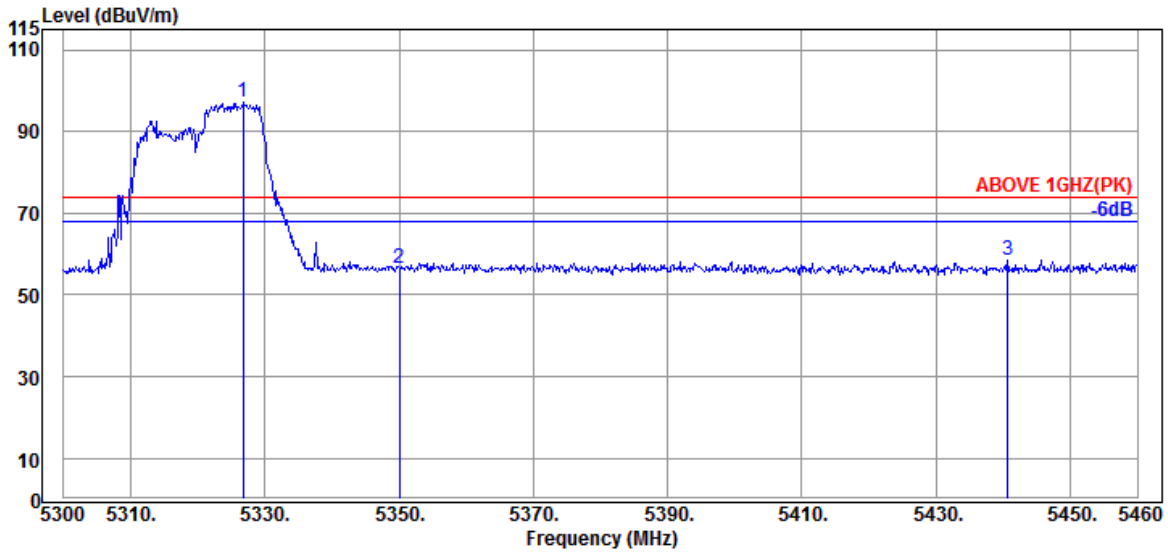

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	34.73	8.99	34.27	87.60	97.05	---	---	Peak
5350.080	34.90	8.99	34.26	46.80	56.43	74.00	17.57	Peak
5440.640	34.65	9.04	34.22	49.09	58.56	74.00	15.44	Peak

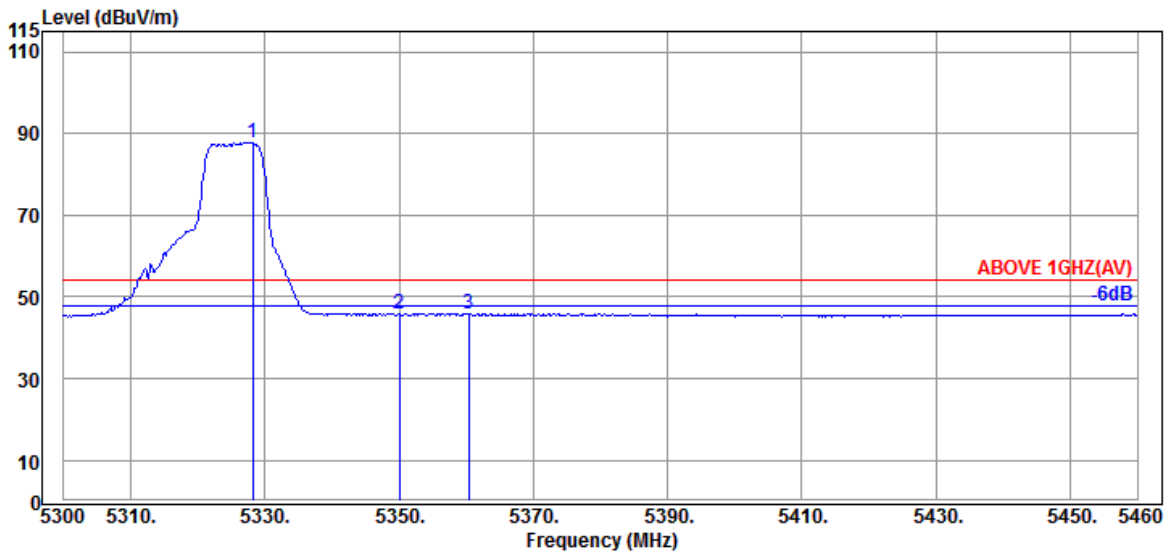

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	78.38	87.84	---	---	Average
5350.080	34.90	8.99	34.26	36.15	45.78	54.00	8.22	Average
5360.320	34.87	9.00	34.26	36.40	46.01	54.00	7.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

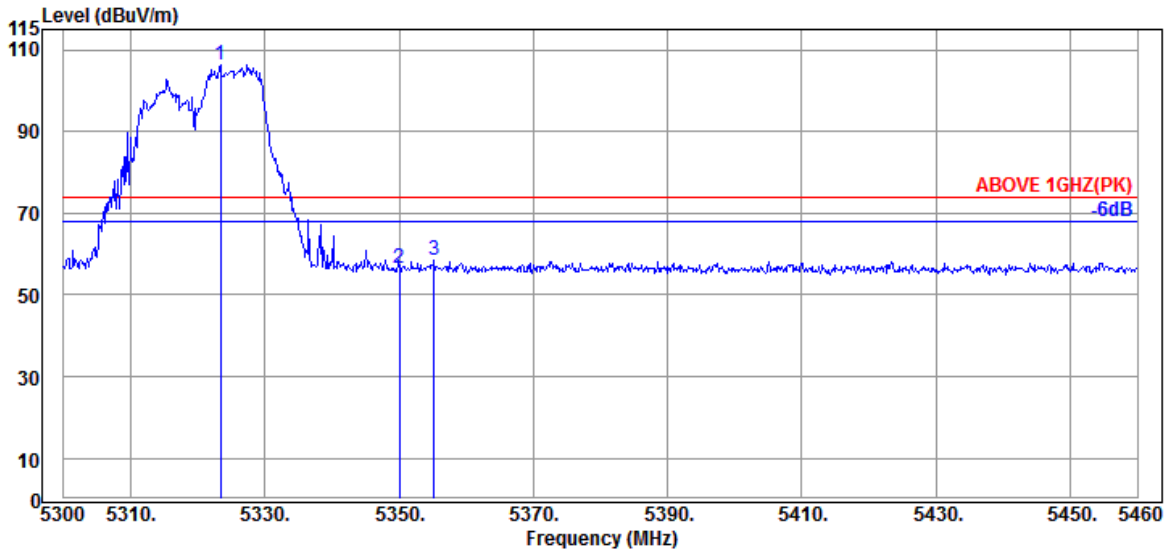

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.73	8.99	34.27	96.75	106.20	---	---	Peak
5350.080	34.90	8.99	34.26	47.00	56.63	74.00	17.37	Peak
5355.200	34.87	9.00	34.26	48.83	58.44	74.00	15.56	Peak

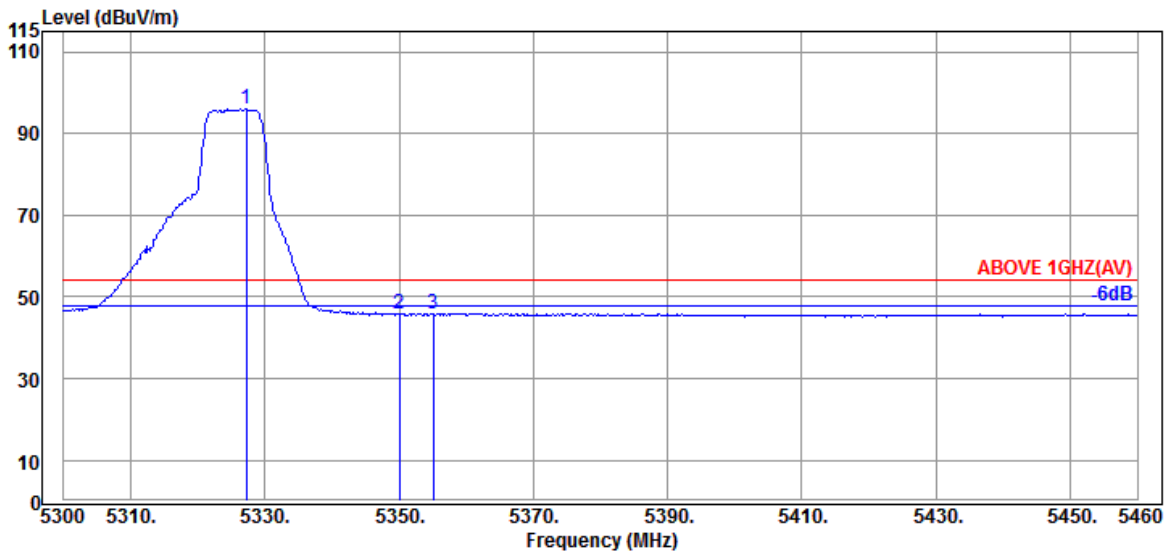


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.73	8.99	34.27	86.61	96.06	---	---	Average
5350.080	34.90	8.99	34.26	36.07	45.70	54.00	8.30	Average
5355.040	34.87	9.00	34.26	36.41	46.02	54.00	7.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

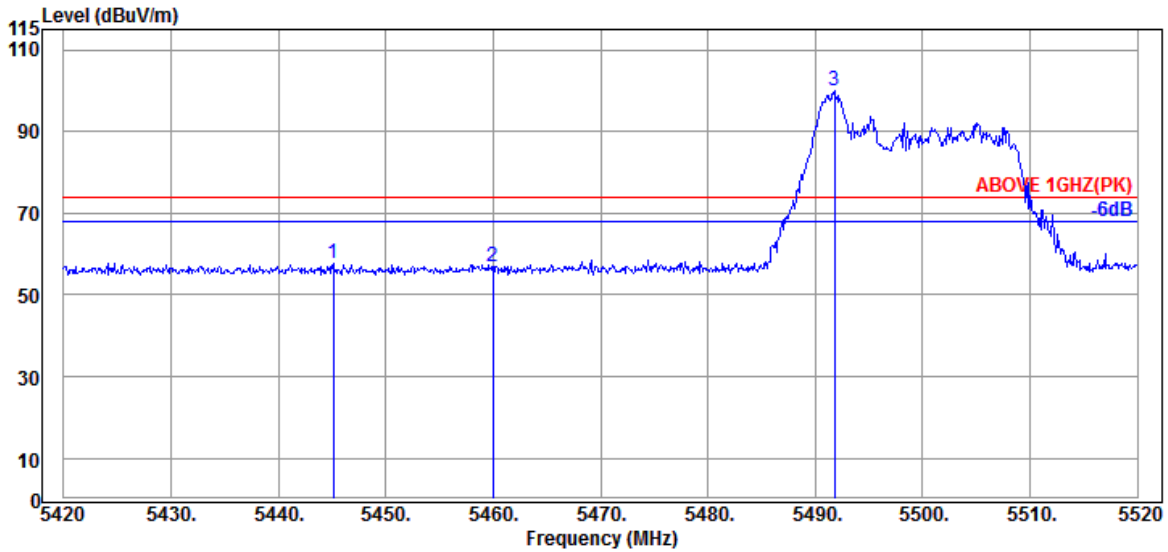

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.100	34.65	9.04	34.22	48.10	57.57	74.00	16.43	Peak
5460.000	34.60	9.05	34.21	47.29	56.73	74.00	17.27	Peak
@ 5491.800	34.67	9.07	34.20	90.30	99.84	---	---	Peak

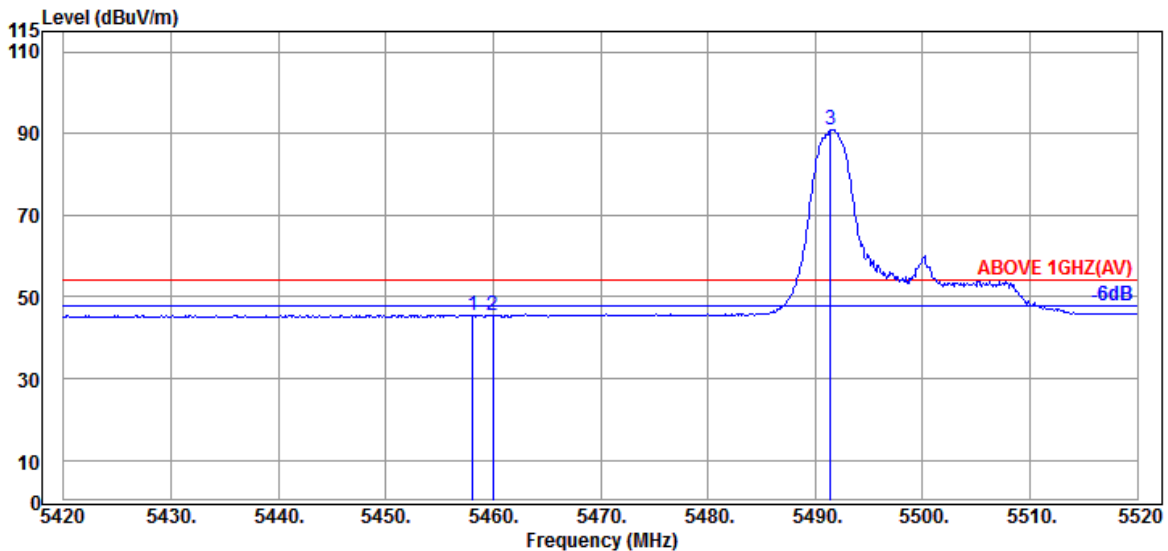


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.60	9.05	34.21	36.11	45.55	54.00	8.45	Average
5460.000	34.60	9.05	34.21	35.81	45.25	54.00	8.75	Average
@ 5491.400	34.67	9.07	34.20	81.49	91.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

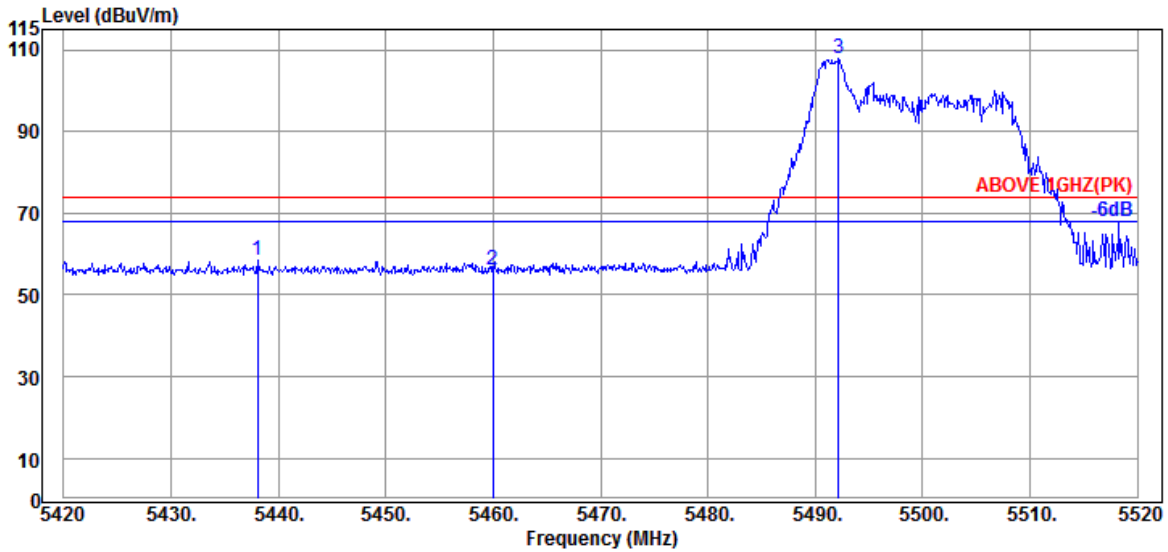

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.65	9.04	34.22	48.86	58.33	74.00	15.67	Peak
5460.000	34.60	9.05	34.21	46.77	56.21	74.00	17.79	Peak
@ 5492.200	34.67	9.07	34.20	98.15	107.69	---	---	Peak

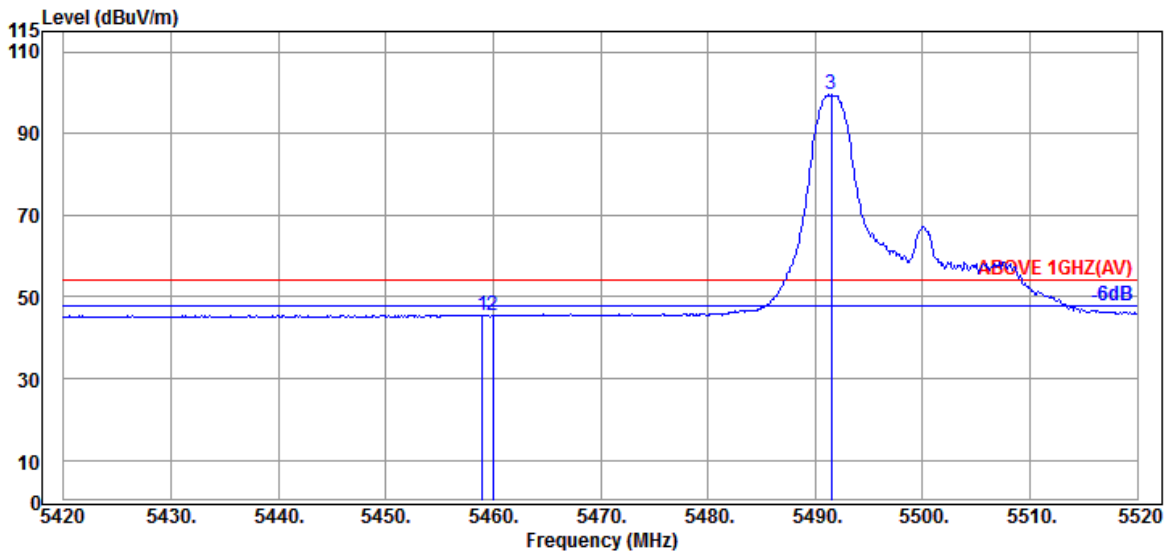


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	35.83	45.27	54.00	8.73	Average
@ 5491.500	34.67	9.07	34.20	89.97	99.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

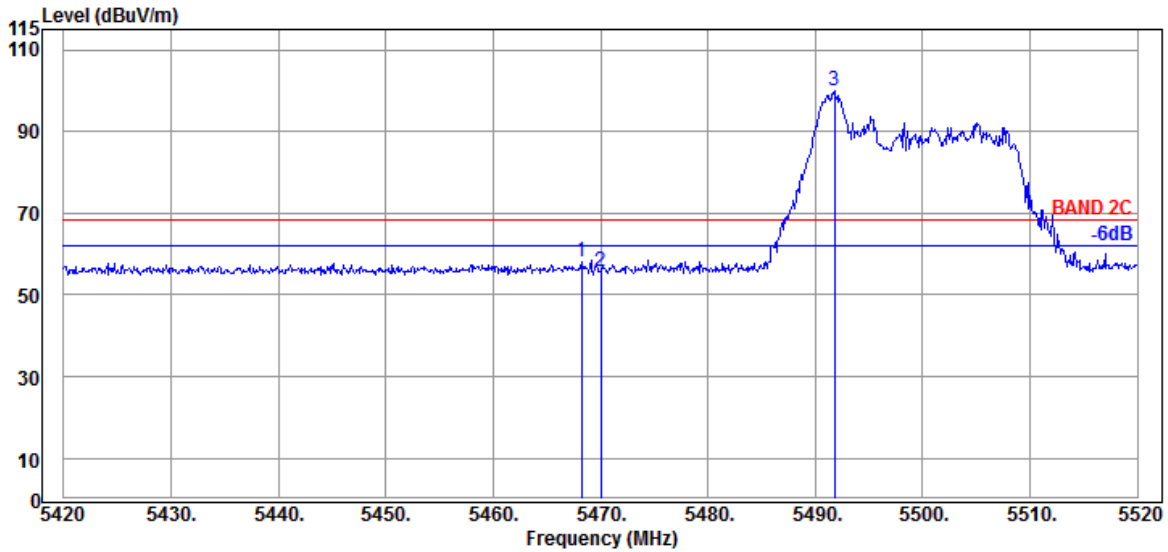

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.63	9.06	34.21	48.66	58.14	68.20	10.06	Peak
5470.000	34.63	9.06	34.21	46.27	55.75	68.20	12.45	Peak
@ 5491.800	34.67	9.07	34.20	90.30	99.84	---	---	Peak

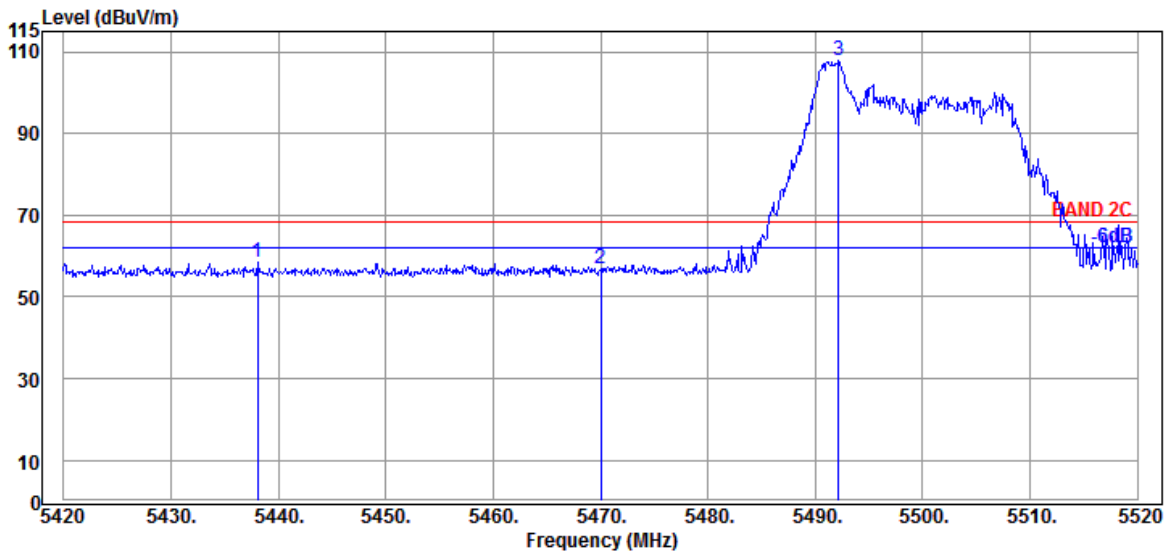


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.65	9.04	34.22	48.86	58.33	68.20	9.87	Peak
5470.000	34.63	9.06	34.21	47.43	56.91	68.20	11.29	Peak
@ 5492.200	34.67	9.07	34.20	98.15	107.69	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

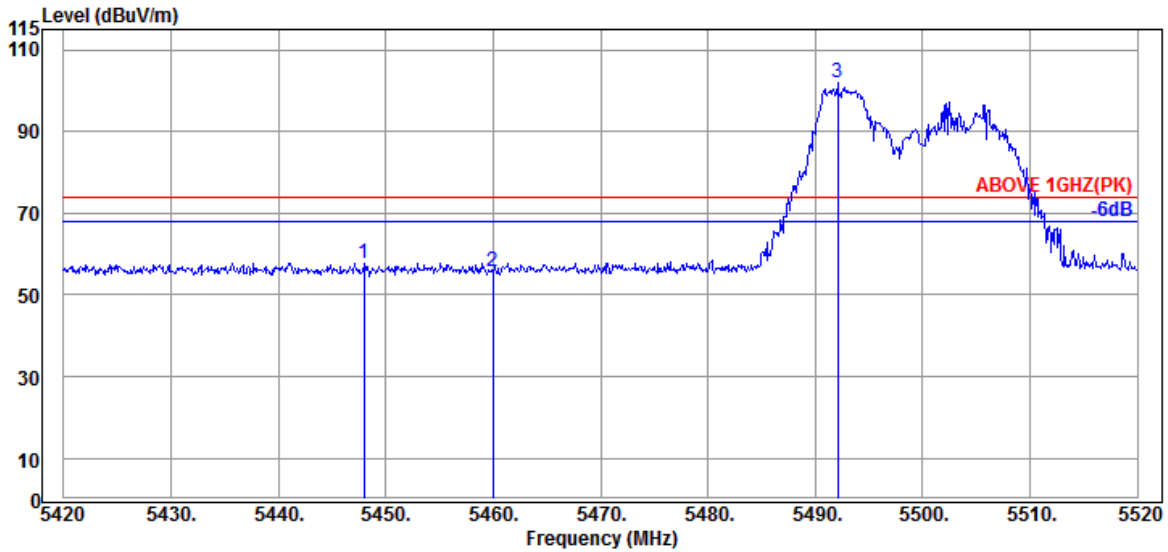

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.60	9.05	34.22	48.44	57.87	74.00	16.13	Peak
5460.000	34.60	9.05	34.21	46.13	55.57	74.00	18.43	Peak
@ 5492.100	34.67	9.07	34.20	92.26	101.80	---	---	Peak

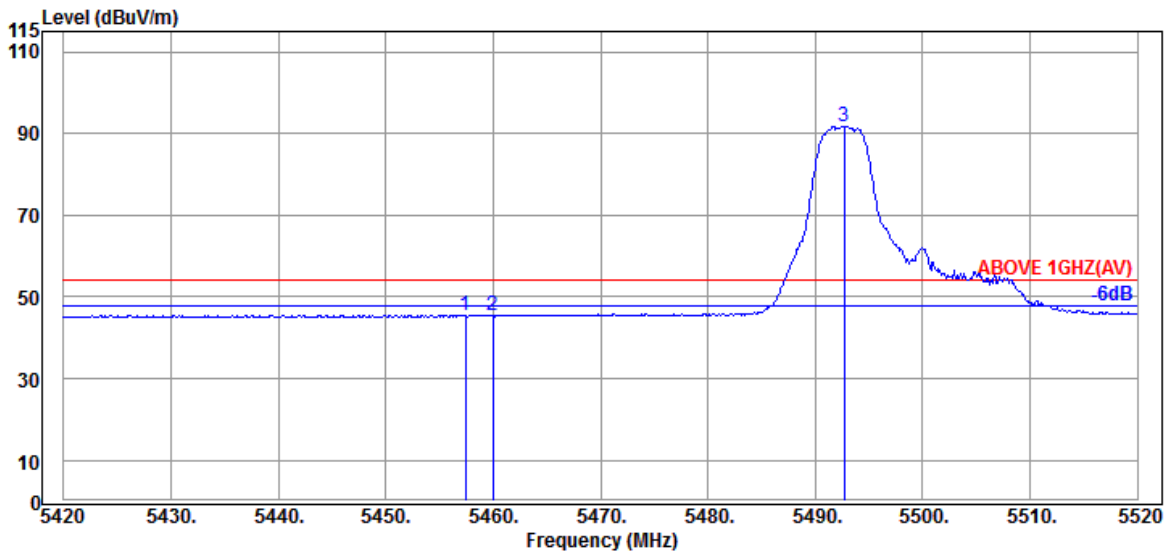


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.60	9.05	34.21	35.99	45.43	54.00	8.57	Average
5460.000	34.60	9.05	34.21	35.93	45.37	54.00	8.63	Average
@ 5492.700	34.67	9.07	34.20	82.33	91.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

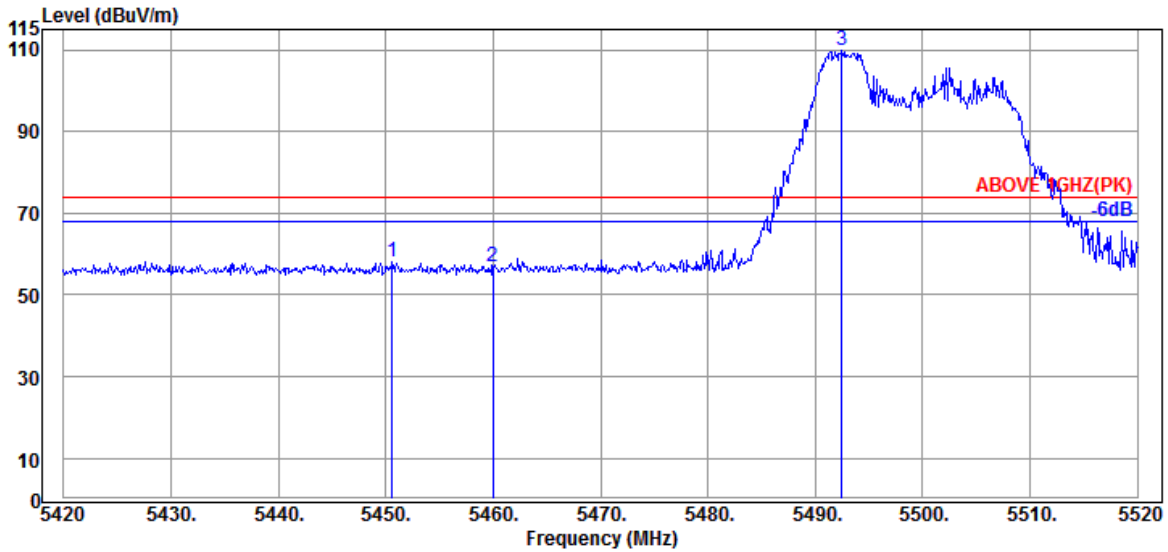

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.600	34.60	9.05	34.22	48.73	58.16	74.00	15.84	Peak
5460.000	34.60	9.05	34.21	47.37	56.81	74.00	17.19	Peak
@ 5492.500	34.67	9.07	34.20	100.40	109.94	---	---	Peak

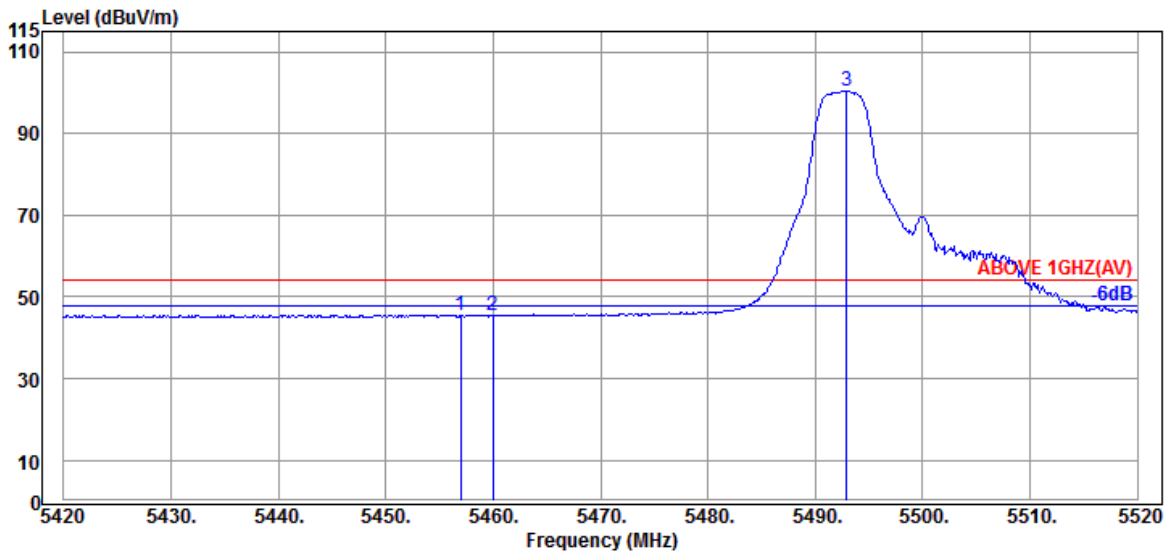


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.000	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	36.05	45.49	54.00	8.51	Average
@ 5492.900	34.67	9.07	34.20	90.89	100.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

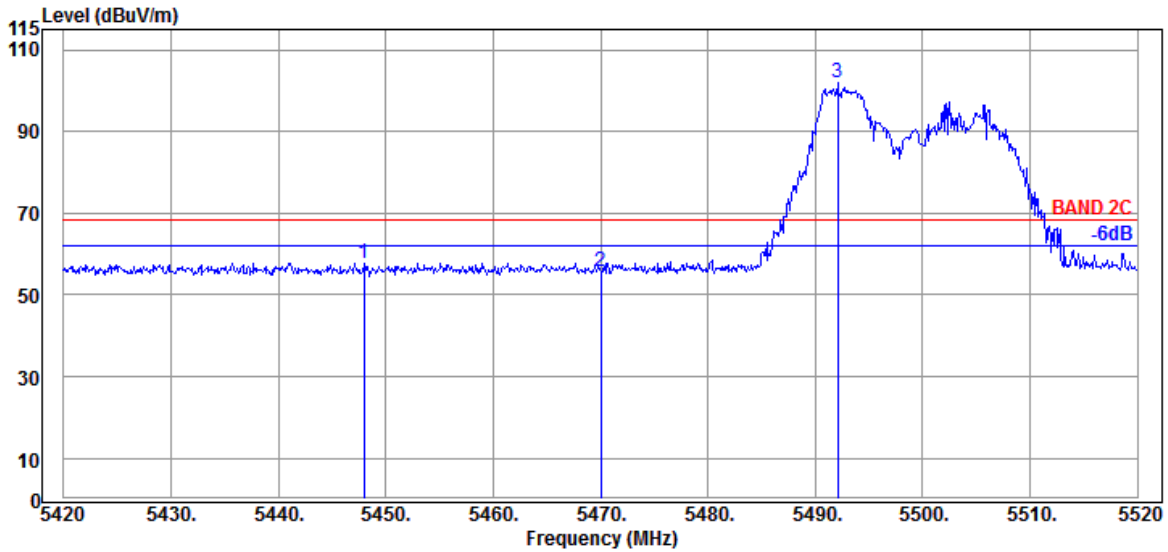

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.60	9.05	34.22	48.44	57.87	68.20	10.33	Peak
5470.000	34.63	9.06	34.21	46.33	55.81	68.20	12.39	Peak
@ 5492.100	34.67	9.07	34.20	92.26	101.80	---	---	Peak

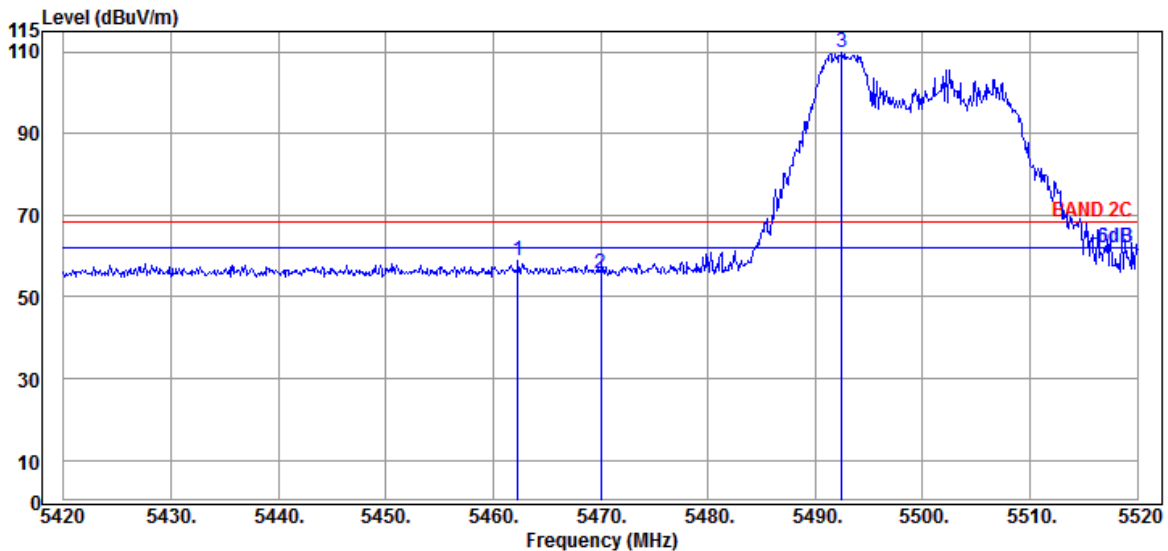


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.60	9.05	34.21	49.38	58.82	68.20	9.38	Peak
5470.000	34.63	9.06	34.21	46.06	55.54	68.20	12.66	Peak
@ 5492.500	34.67	9.07	34.20	100.40	109.94	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

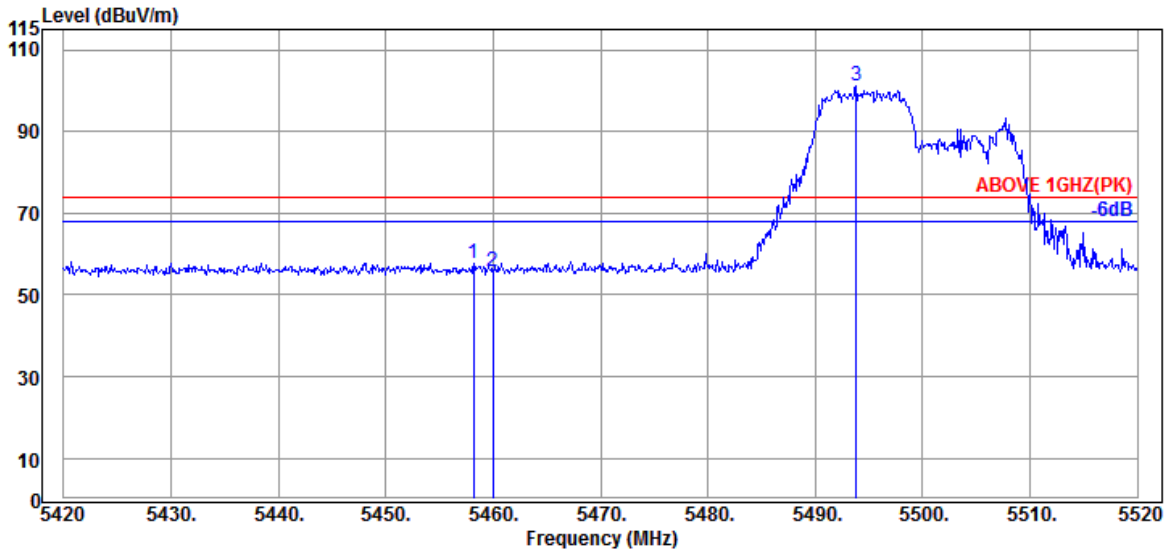

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.60	9.05	34.21	48.34	57.78	74.00	16.22	Peak
5460.000	34.60	9.05	34.21	46.13	55.57	74.00	18.43	Peak
@ 5493.800	34.67	9.07	34.20	91.57	101.11	---	---	Peak

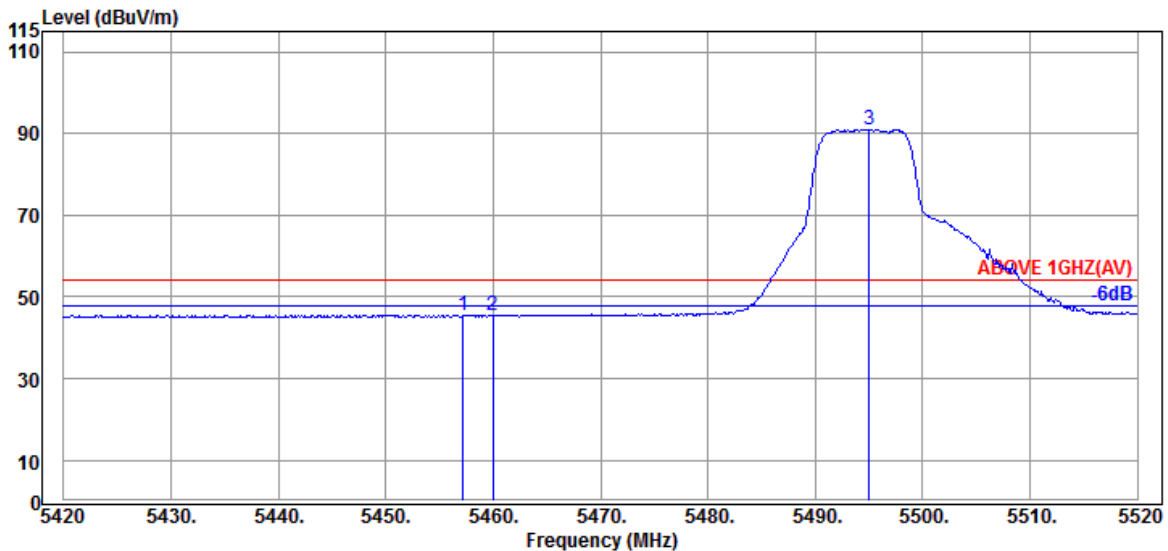


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.200	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	35.91	45.35	54.00	8.65	Average
@ 5495.000	34.67	9.07	34.20	81.52	91.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

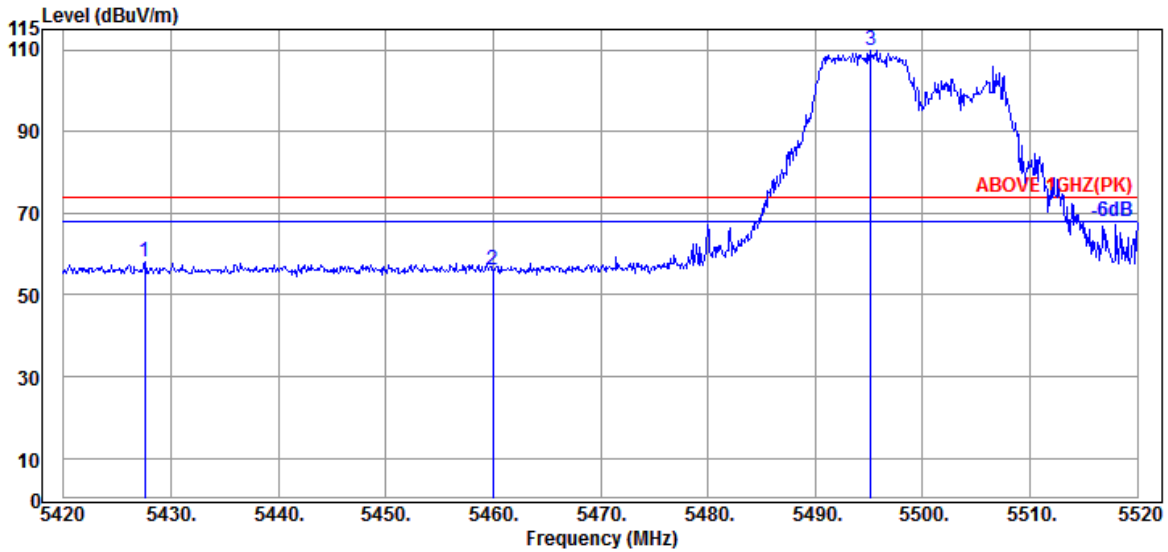

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.600	34.70	9.04	34.23	48.68	58.19	74.00	15.81	Peak
5460.000	34.60	9.05	34.21	46.81	56.25	74.00	17.75	Peak
@ 5495.200	34.70	9.08	34.20	100.20	109.78	---	---	Peak

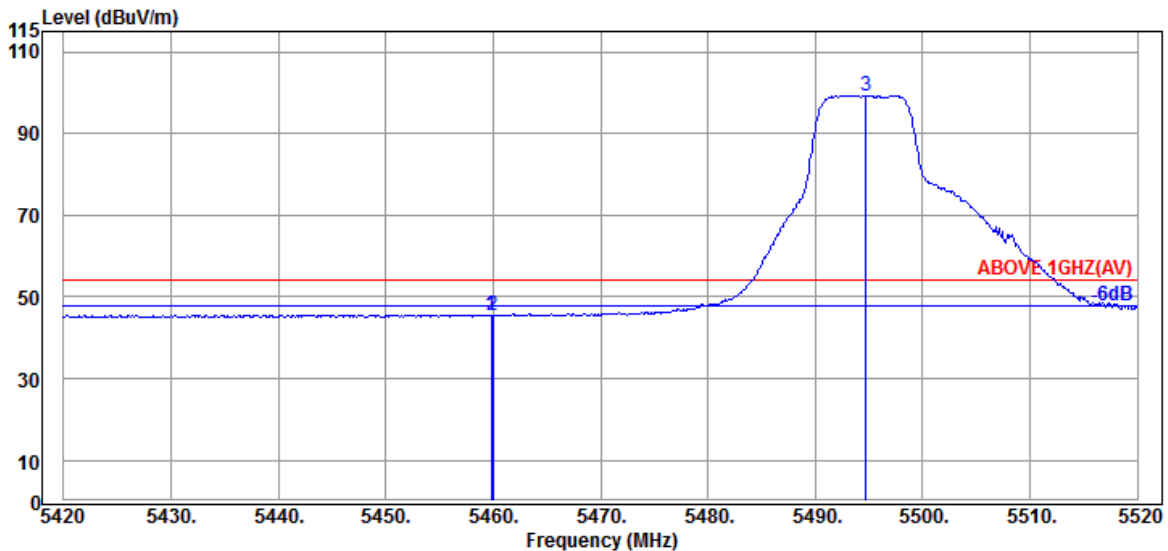


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.60	9.05	34.21	36.12	45.56	54.00	8.44	Average
5460.000	34.60	9.05	34.21	36.01	45.45	54.00	8.55	Average
@ 5494.700	34.67	9.07	34.20	89.82	99.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

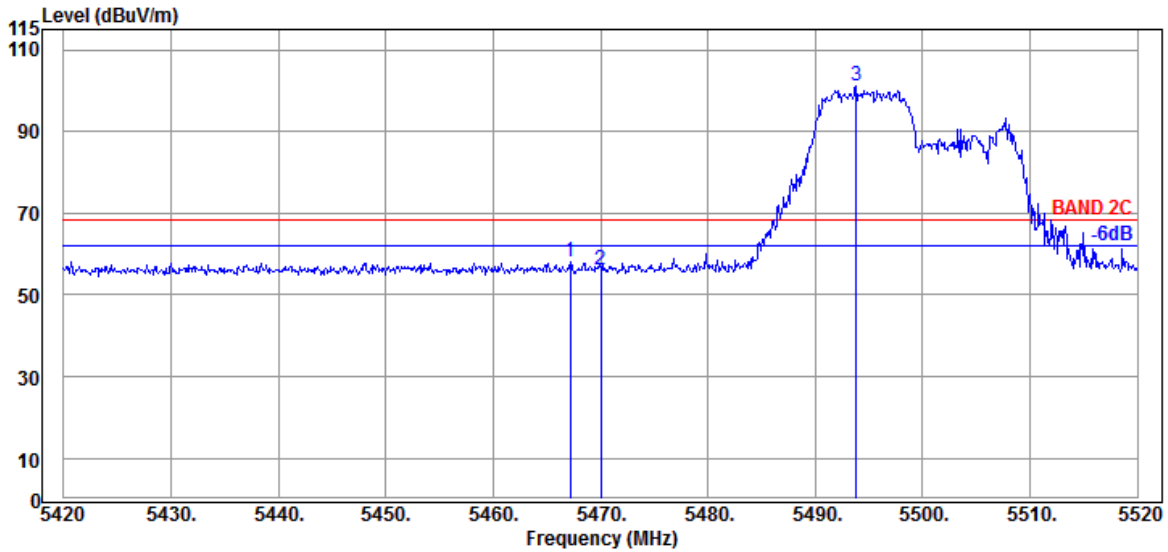

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.63	9.06	34.21	48.53	58.01	68.20	10.19	Peak
5470.000	34.63	9.06	34.21	46.63	56.11	68.20	12.09	Peak
@ 5493.800	34.67	9.07	34.20	91.57	101.11	---	---	Peak

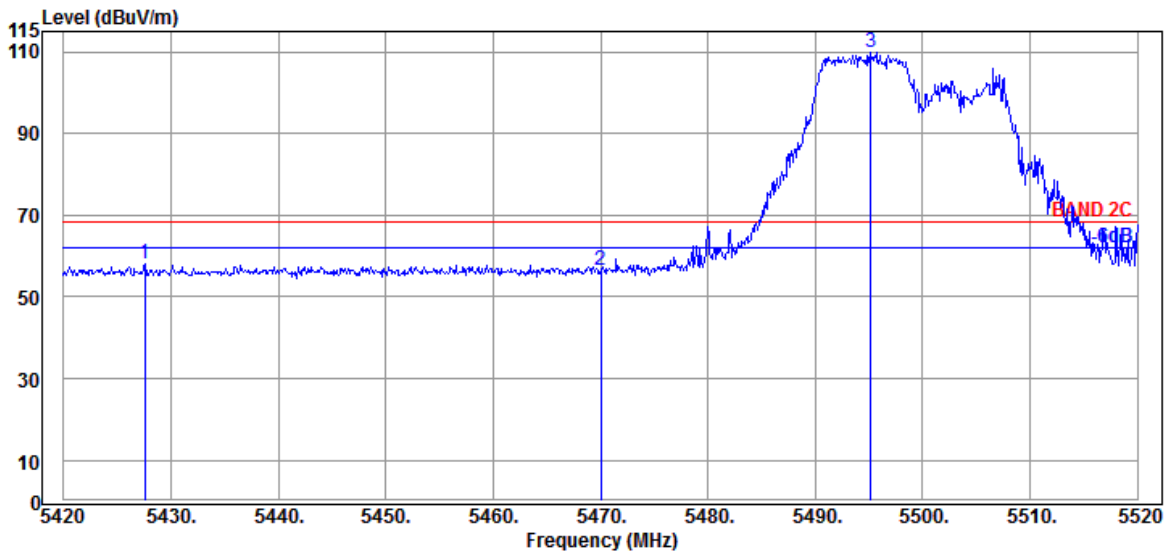


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.600	34.70	9.04	34.23	48.68	58.19	68.20	10.01	Peak
5470.000	34.63	9.06	34.21	46.95	56.43	68.20	11.77	Peak
@ 5495.200	34.70	9.08	34.20	100.20	109.78	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

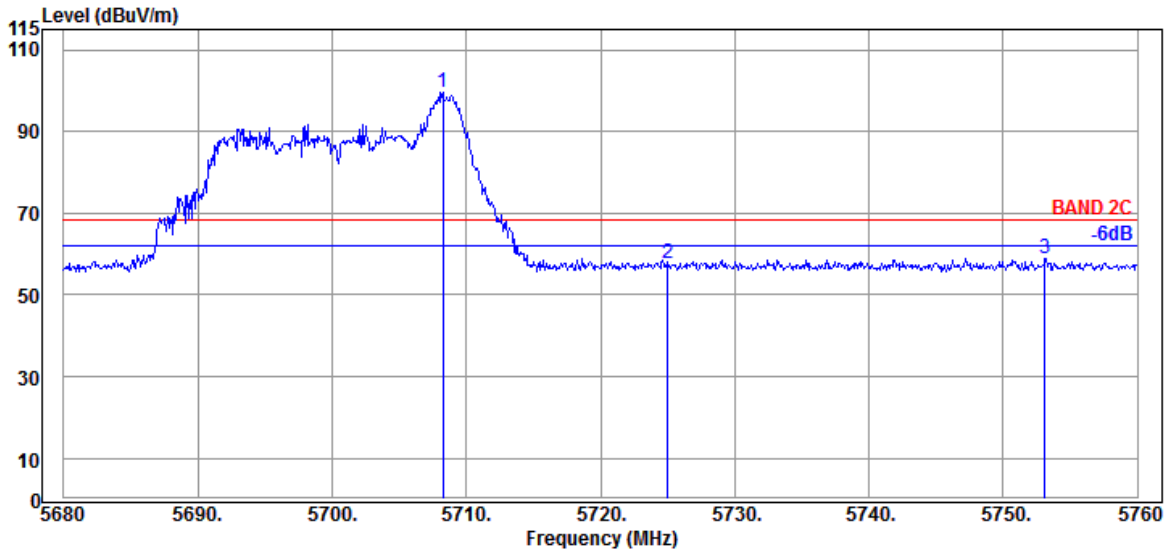

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.240	34.80	9.19	34.30	89.76	99.45	---	---	Peak
5725.040	34.90	9.20	34.30	47.78	57.58	68.20	10.62	Peak
5753.120	35.00	9.20	34.32	49.00	58.88	68.20	9.32	Peak

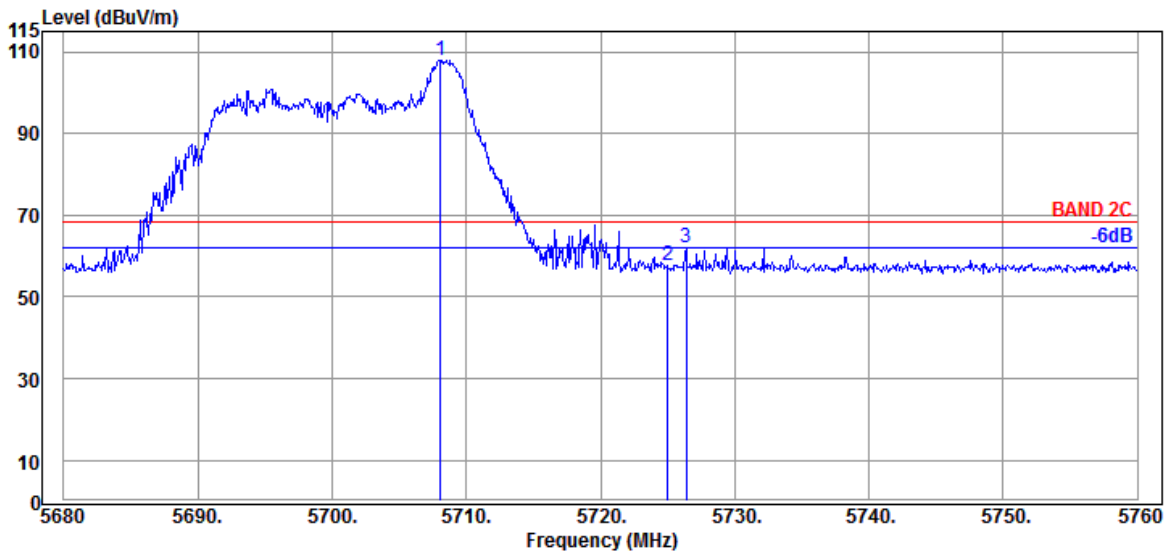


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.080	34.80	9.19	34.30	98.37	108.06	---	---	Peak
5725.040	34.90	9.20	34.30	47.86	57.66	68.20	10.54	Peak
5726.400	34.90	9.20	34.31	52.31	62.10	68.20	6.10	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

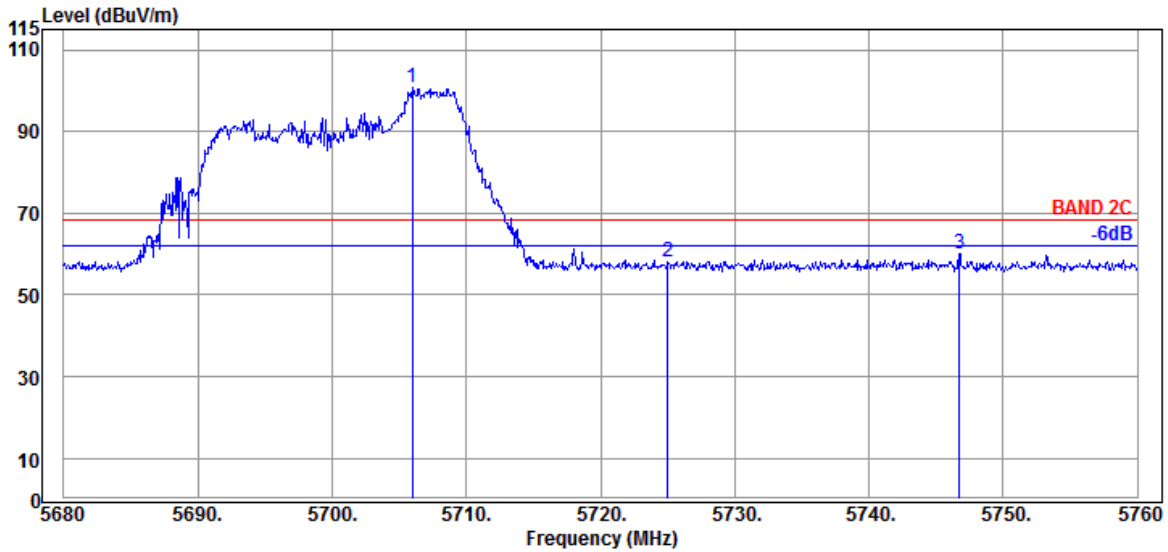

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	34.80	9.19	34.29	90.97	100.67	---	---	Peak
5725.040	34.90	9.20	34.30	48.32	58.12	68.20	10.08	Peak
5746.720	35.00	9.20	34.32	50.19	60.07	68.20	8.13	Peak

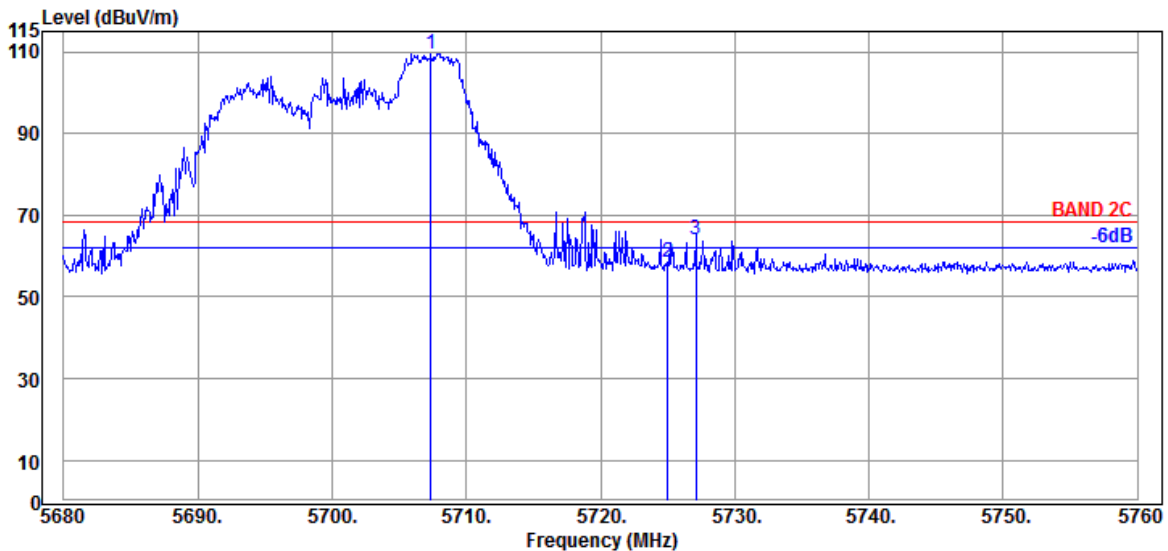


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.360	34.80	9.19	34.29	99.94	109.64	---	---	Peak
5725.040	34.90	9.20	34.30	48.57	58.37	68.20	9.83	Peak
5727.120	34.90	9.20	34.31	54.27	64.06	68.20	4.14	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

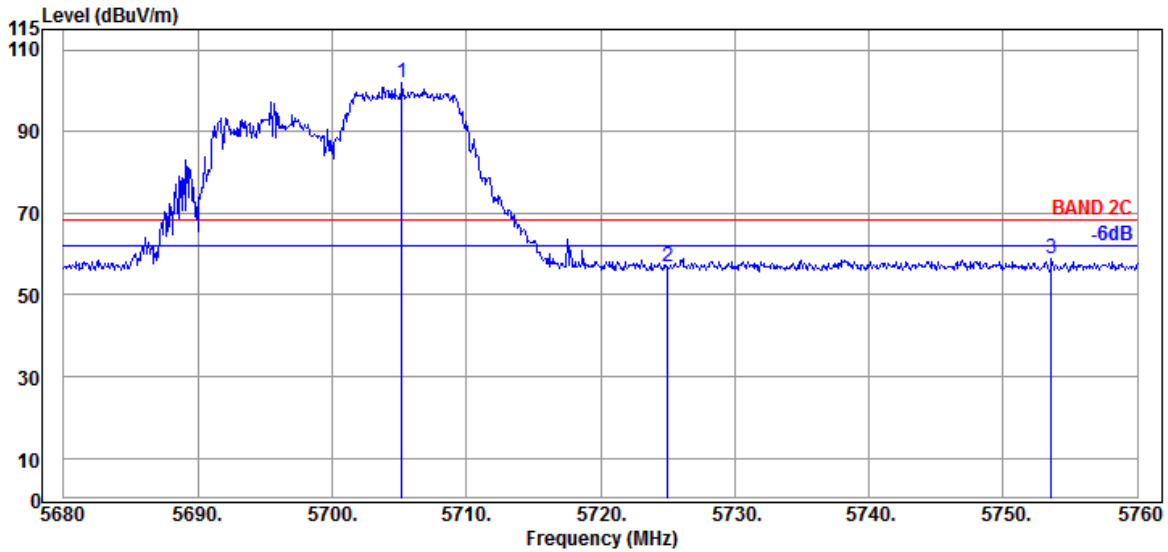

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.200	34.70	9.18	34.29	92.26	101.85	---	---	Peak
5725.040	34.90	9.20	34.30	47.08	56.88	68.20	11.32	Peak
5753.600	35.00	9.20	34.32	48.91	58.79	68.20	9.41	Peak

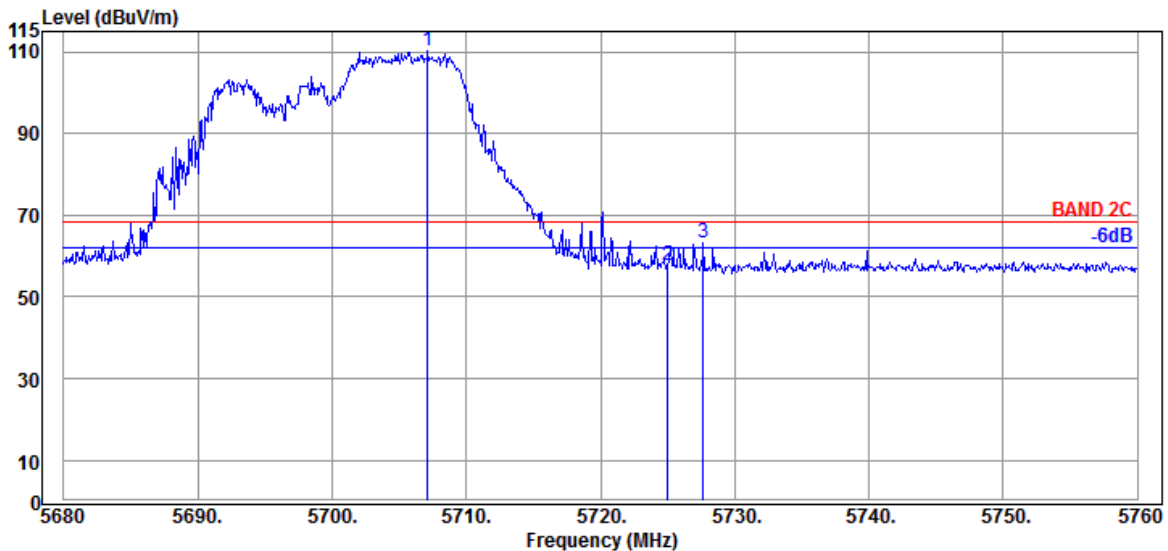


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.120	34.80	9.19	34.29	100.70	110.40	---	---	Peak
5725.040	34.90	9.20	34.30	47.96	57.76	68.20	10.44	Peak
5727.680	34.90	9.20	34.31	53.37	63.16	68.20	5.04	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

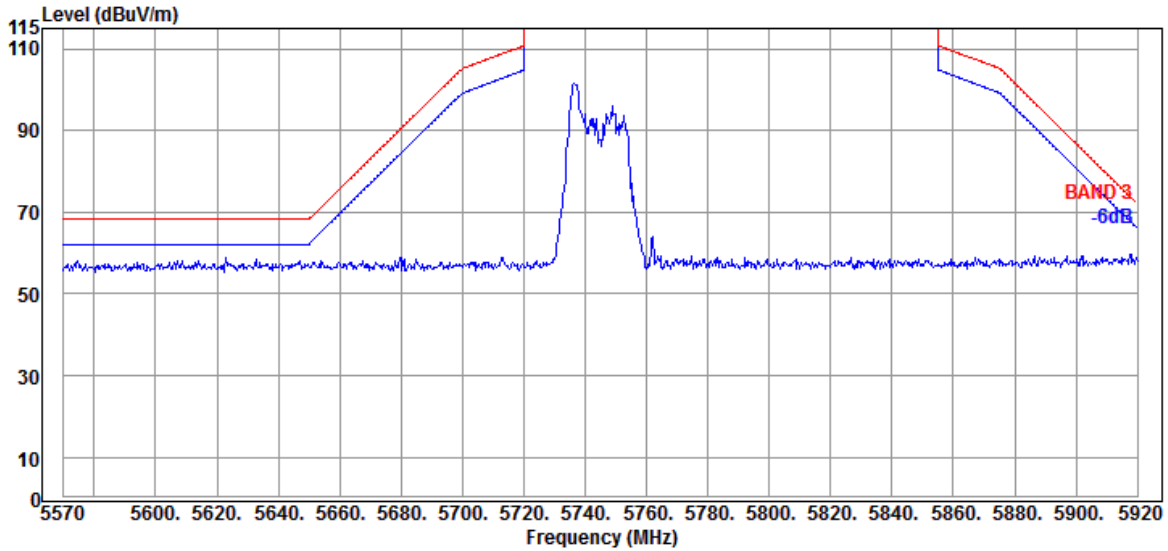


Antenna at Vertical Polarization

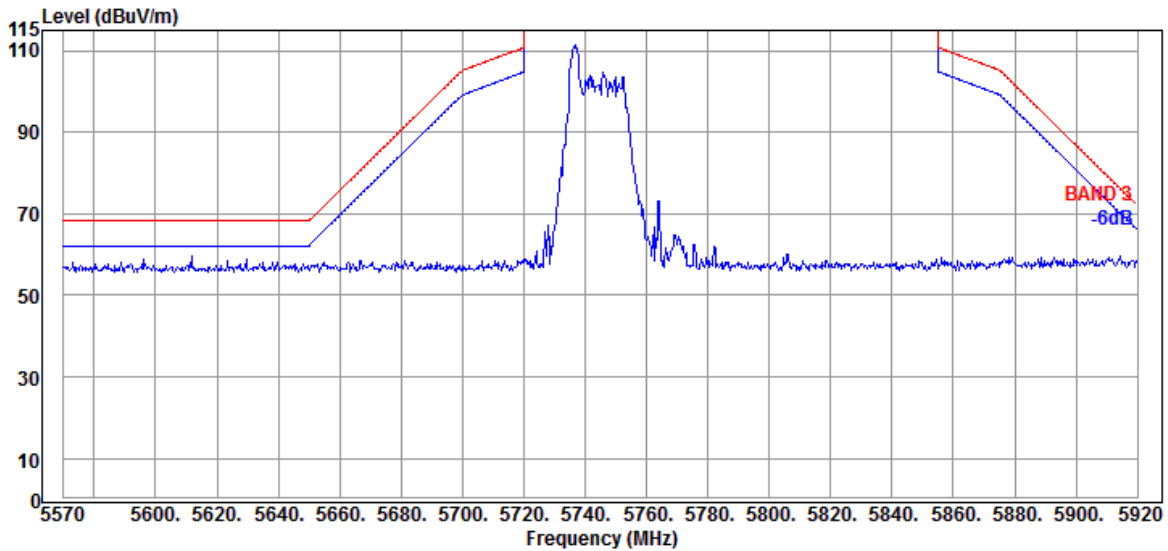


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

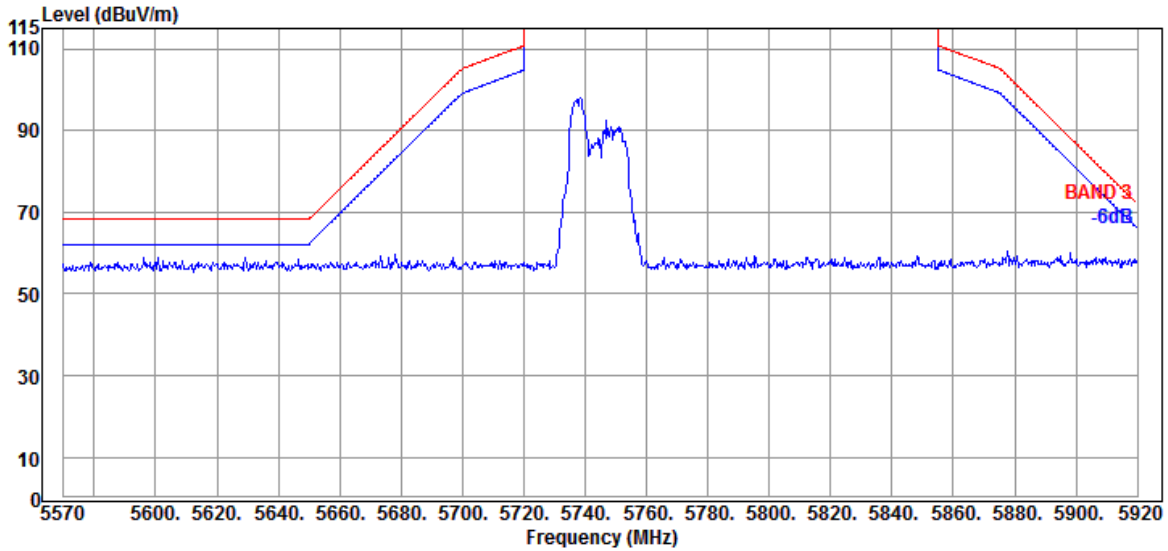


Antenna at Vertical Polarization

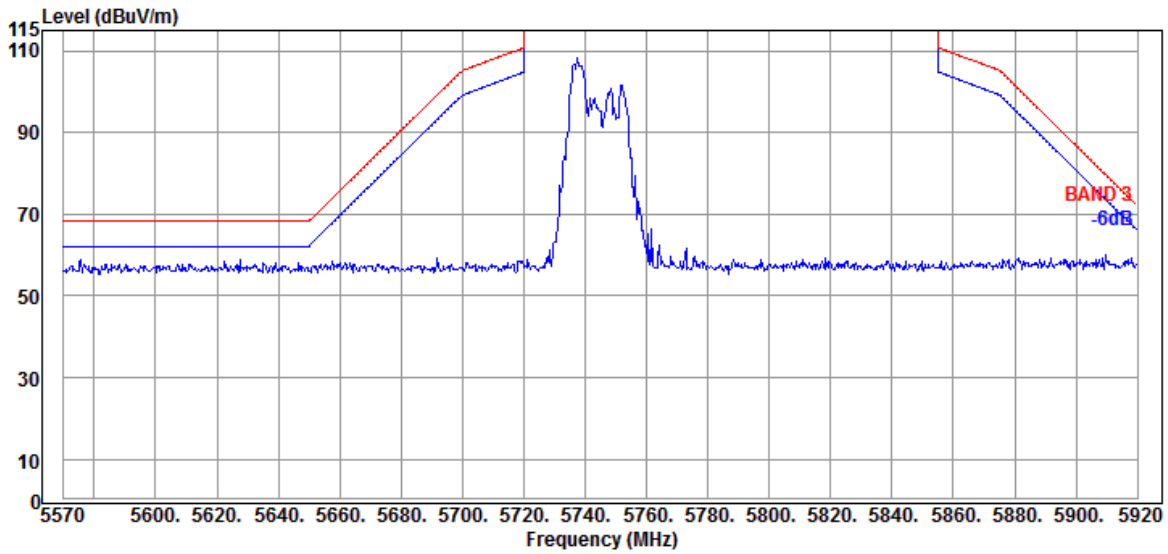


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

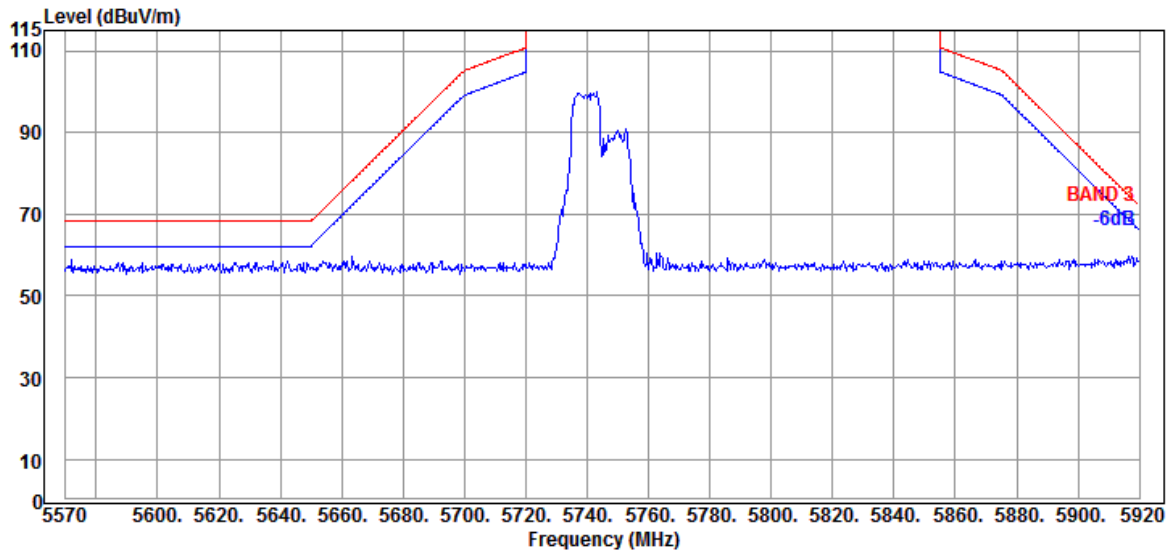


Antenna at Vertical Polarization

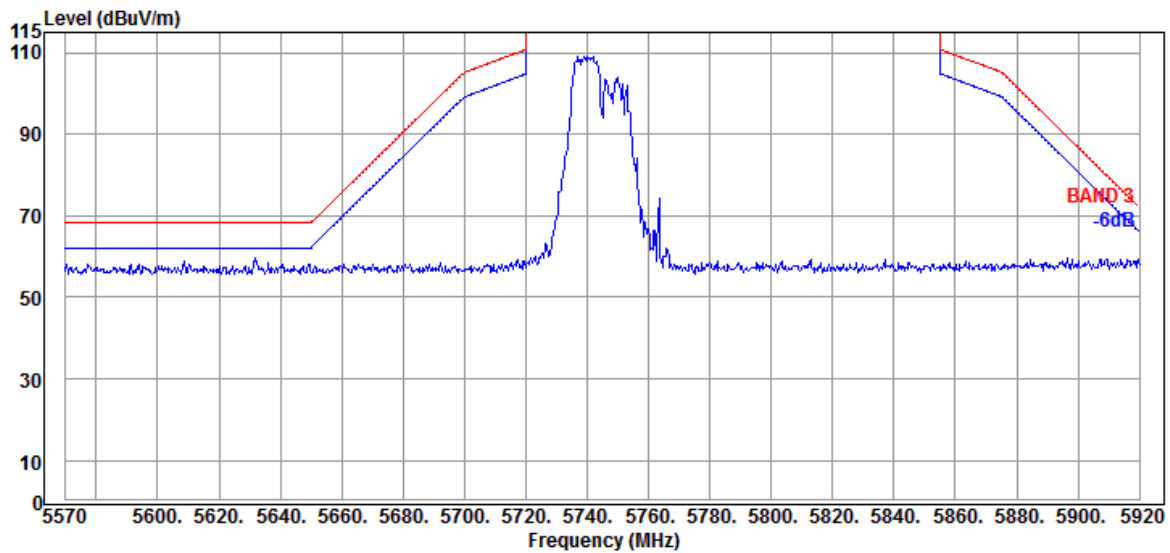


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

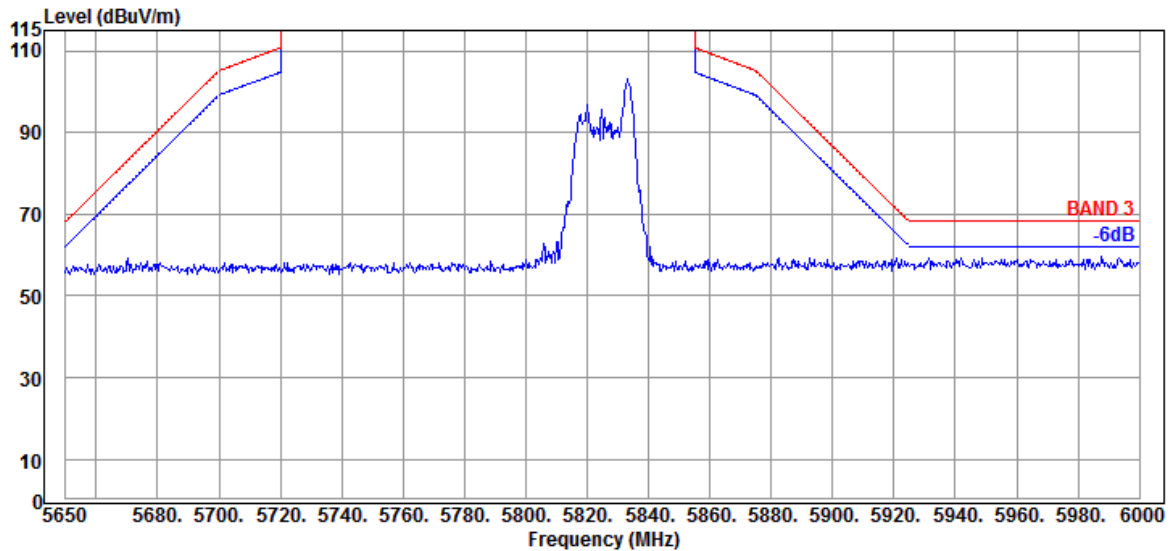


Antenna at Vertical Polarization

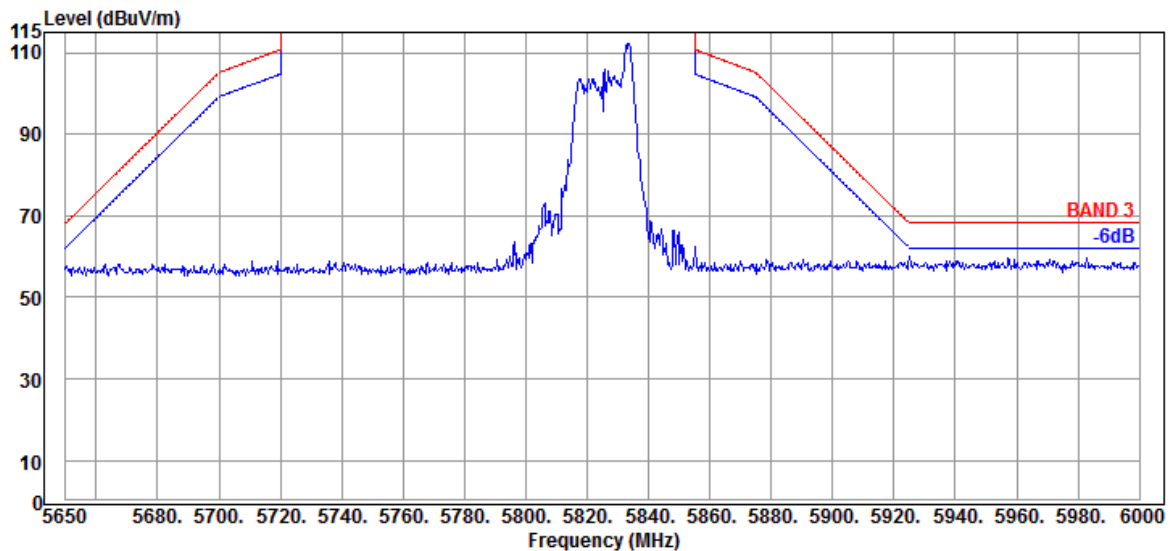


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

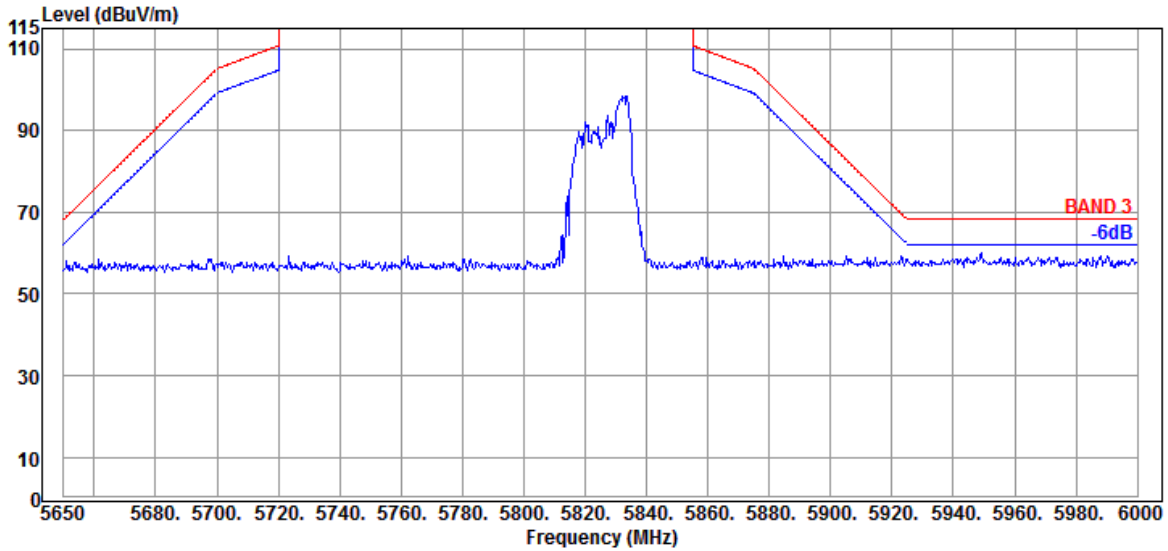


Antenna at Vertical Polarization

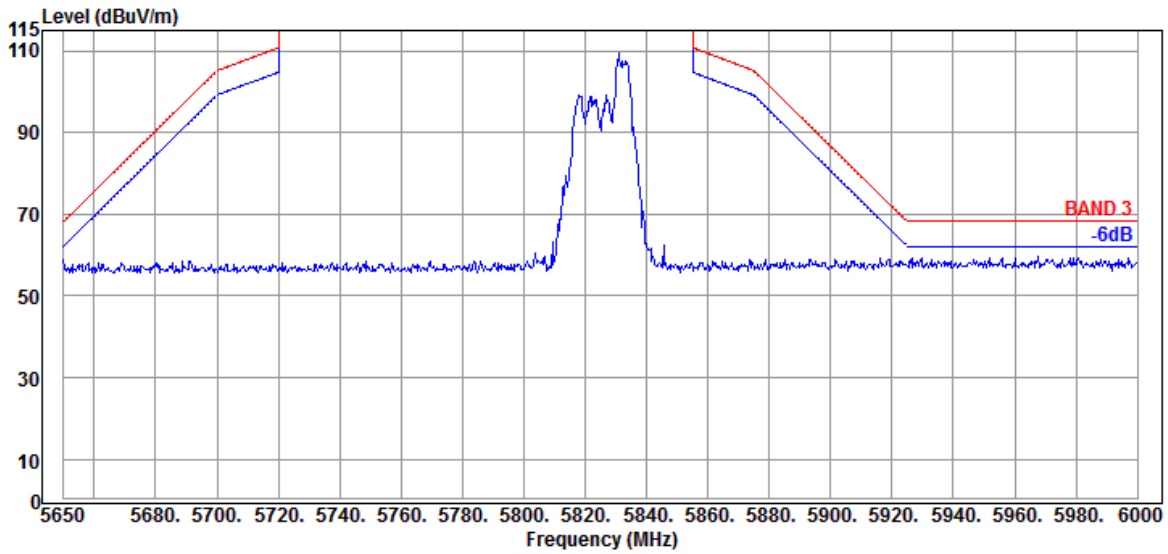


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

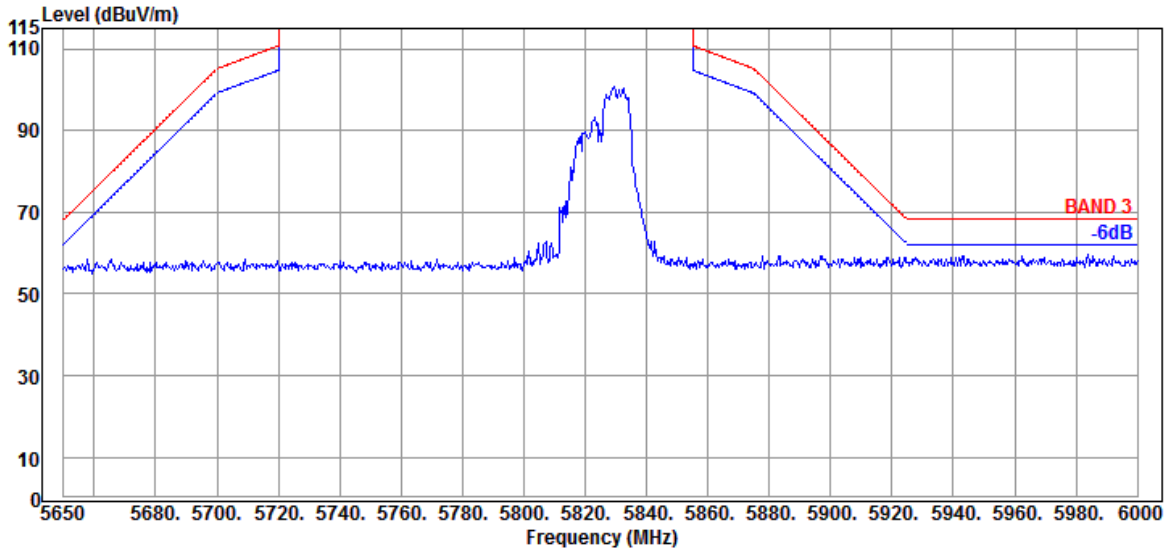

Antenna at Vertical Polarization

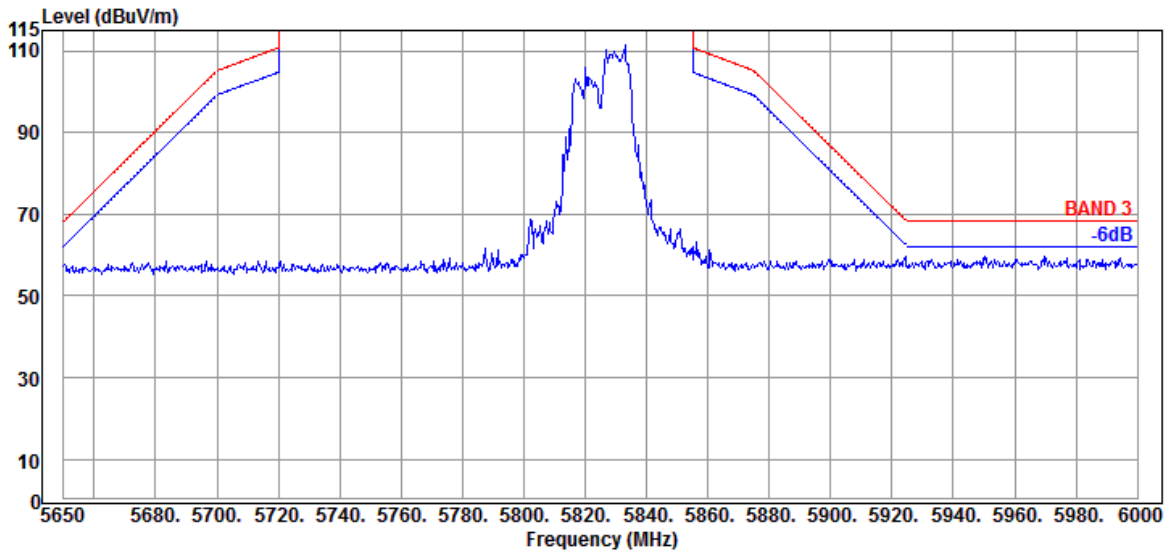


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

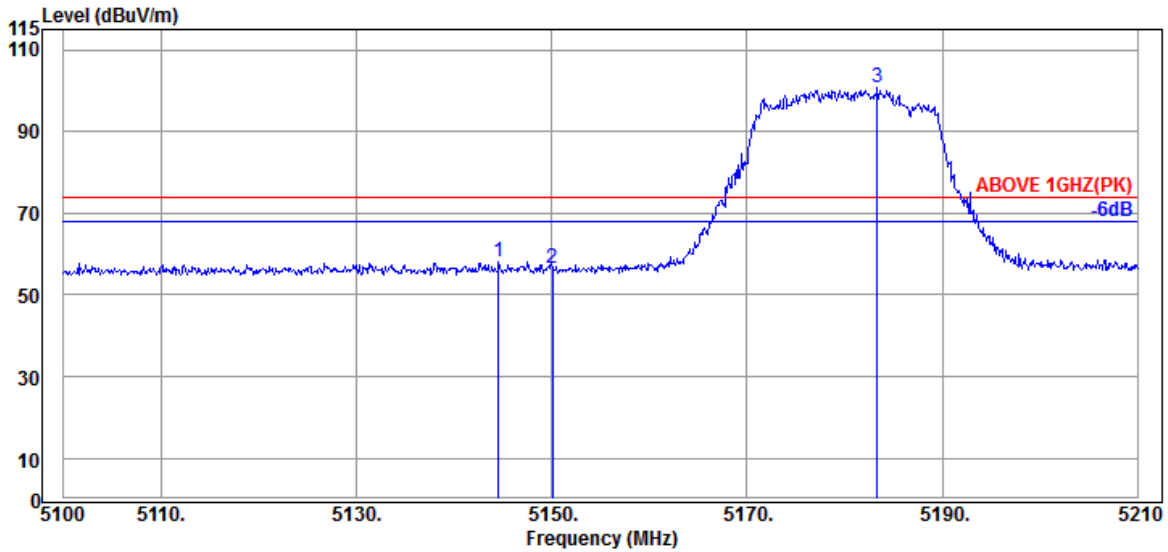

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.550	34.50	8.88	34.34	48.91	57.95	74.00	16.05	Peak
5150.050	34.50	8.88	34.34	47.40	56.44	74.00	17.56	Peak
@ 5183.380	34.63	8.90	34.32	91.59	100.80	---	---	Peak

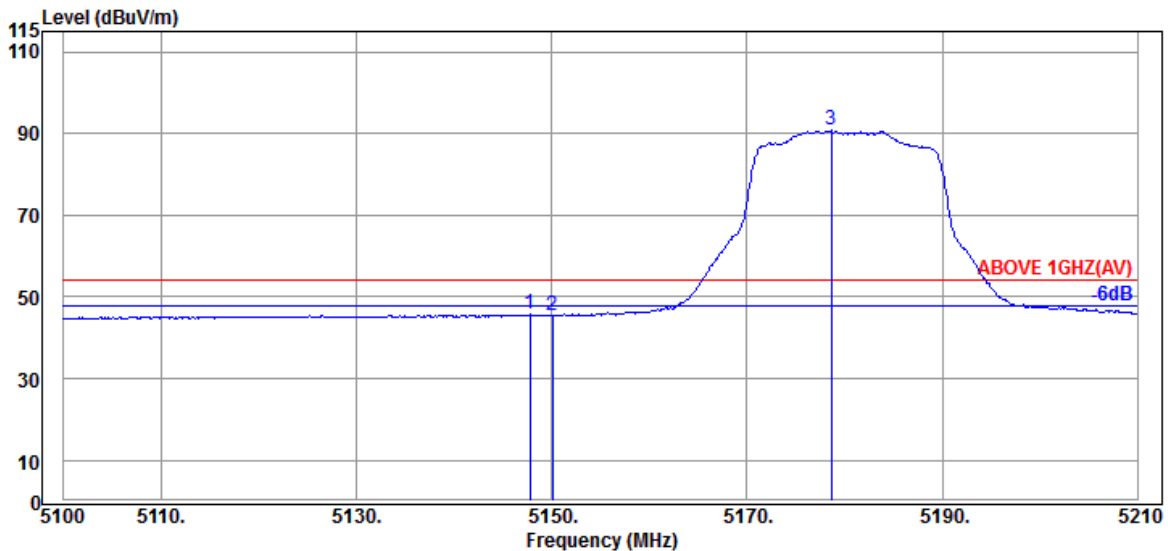


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.740	34.50	8.88	34.34	36.68	45.72	54.00	8.28	Average
5150.050	34.50	8.88	34.34	36.39	45.43	54.00	8.57	Average
@ 5178.650	34.63	8.90	34.32	81.50	90.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

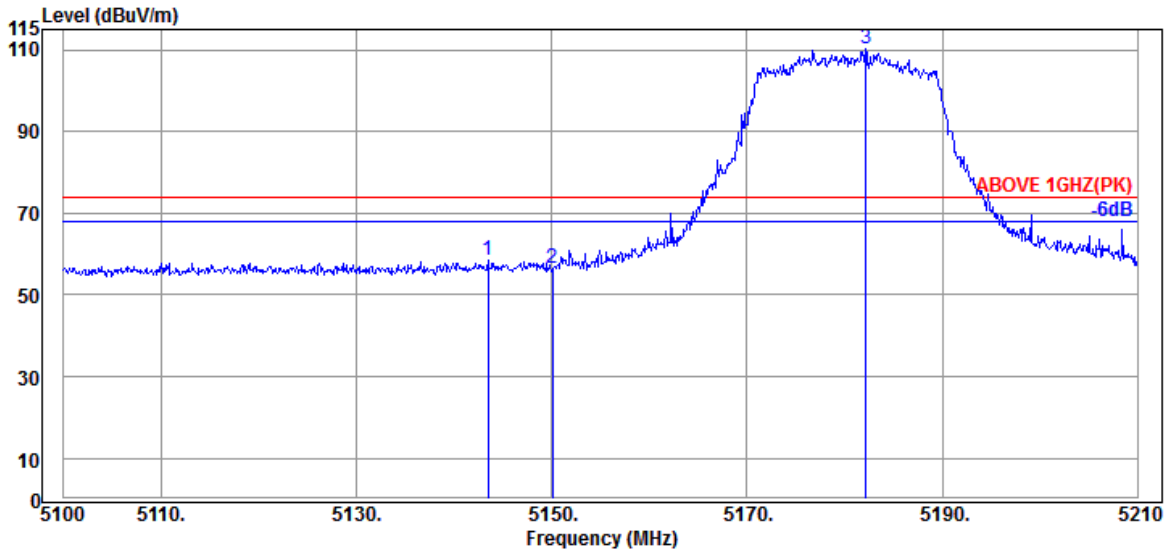

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.450	34.50	8.88	34.34	49.57	58.61	74.00	15.39	Peak
5150.050	34.50	8.88	34.34	47.56	56.60	74.00	17.40	Peak
@ 5182.170	34.63	8.90	34.32	100.92	110.13	---	---	Peak

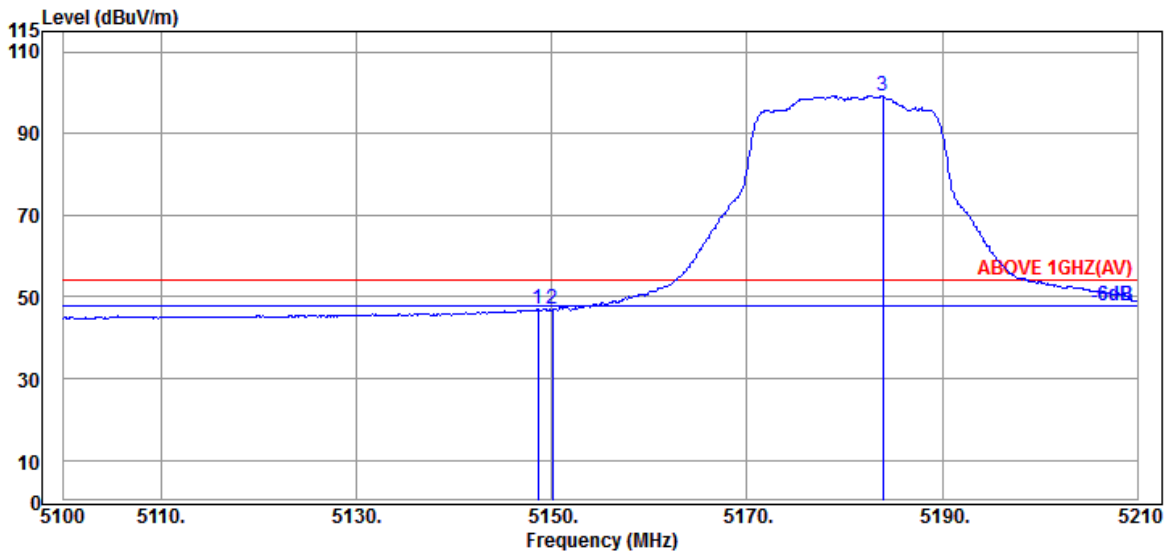

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	34.50	8.88	34.34	37.90	46.94	54.00	7.06	Average
5150.050	34.50	8.88	34.34	37.87	46.91	54.00	7.09	Average
@ 5183.930	34.63	8.90	34.32	90.11	99.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

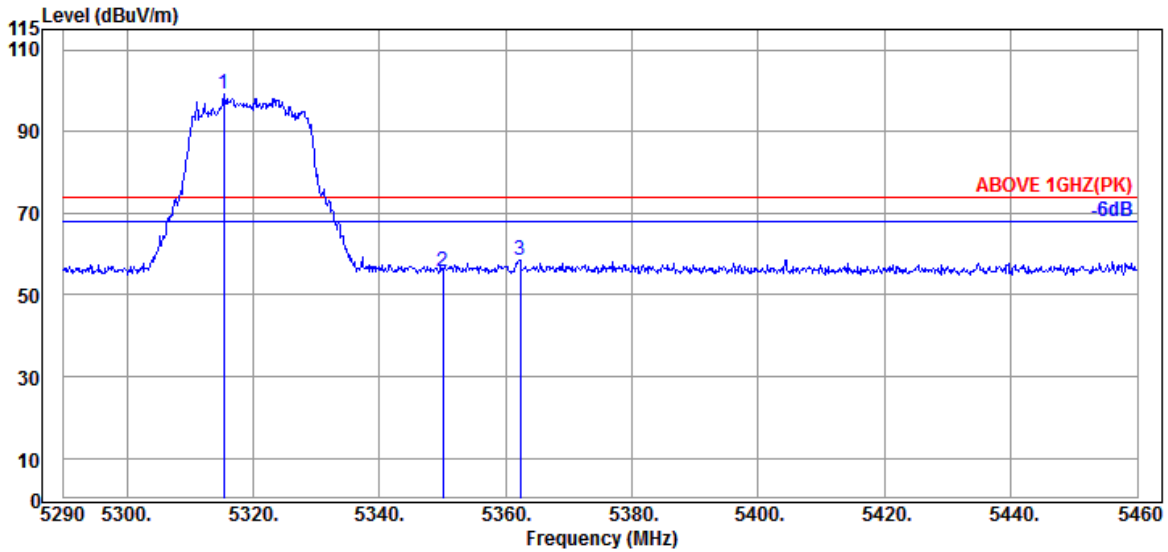

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.330	34.57	8.98	34.27	90.08	99.36	---	---	Peak
5350.010	34.90	8.99	34.26	46.17	55.80	74.00	18.20	Peak
5362.250	34.87	9.00	34.26	48.76	58.37	74.00	15.63	Peak

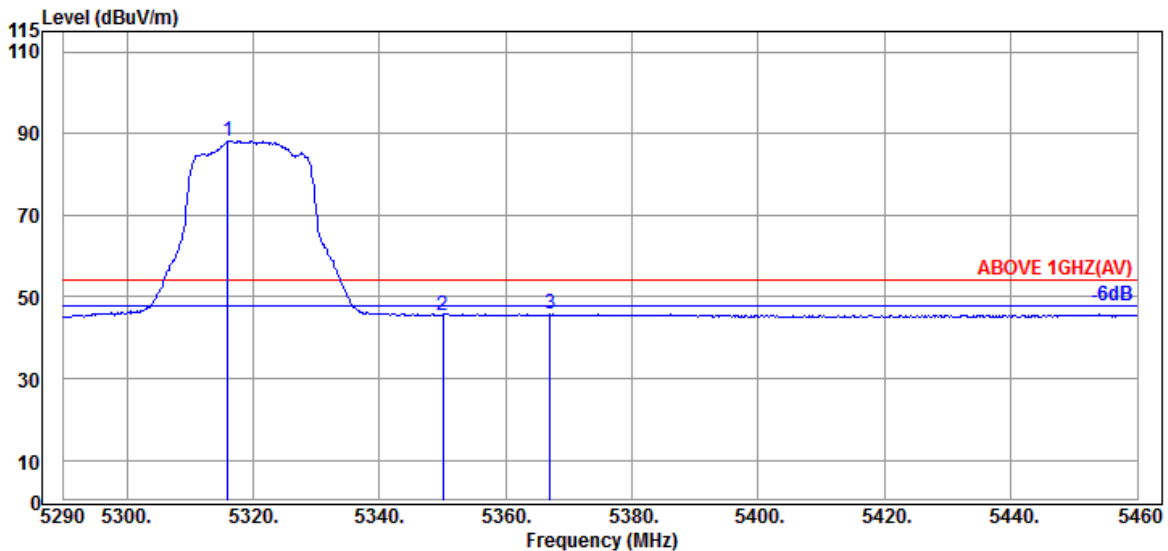

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.010	34.57	8.98	34.27	78.99	88.27	---	---	Average
5350.010	34.90	8.99	34.26	35.98	45.61	54.00	8.39	Average
5367.010	34.87	9.00	34.25	36.22	45.84	54.00	8.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

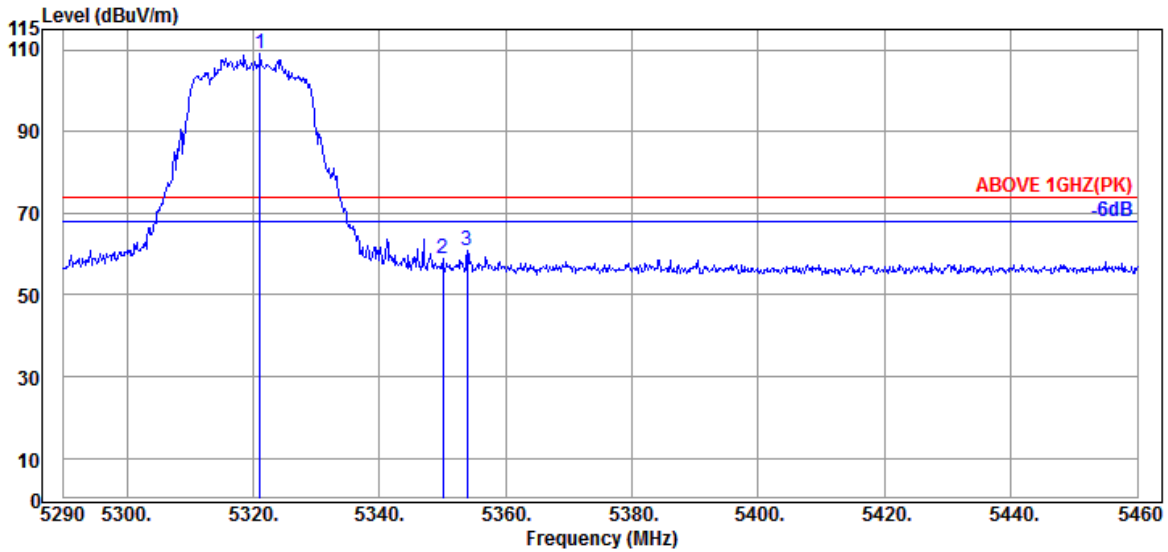

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.110	34.57	8.98	34.27	99.68	108.96	---	---	Peak
5350.010	34.90	8.99	34.26	49.30	58.93	74.00	15.07	Peak
5353.920	34.90	8.99	34.26	51.09	60.72	74.00	13.28	Peak

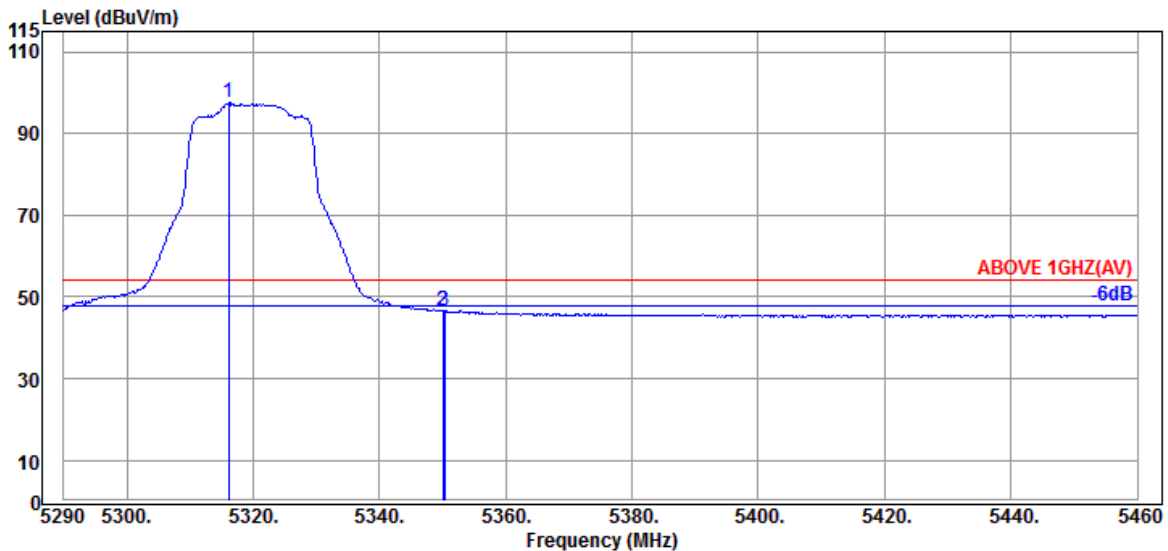


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	34.57	8.98	34.27	88.36	97.64	---	---	Average
5350.010	34.90	8.99	34.26	36.99	46.62	54.00	7.38	Average
5350.350	34.90	8.99	34.26	37.12	46.75	54.00	7.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

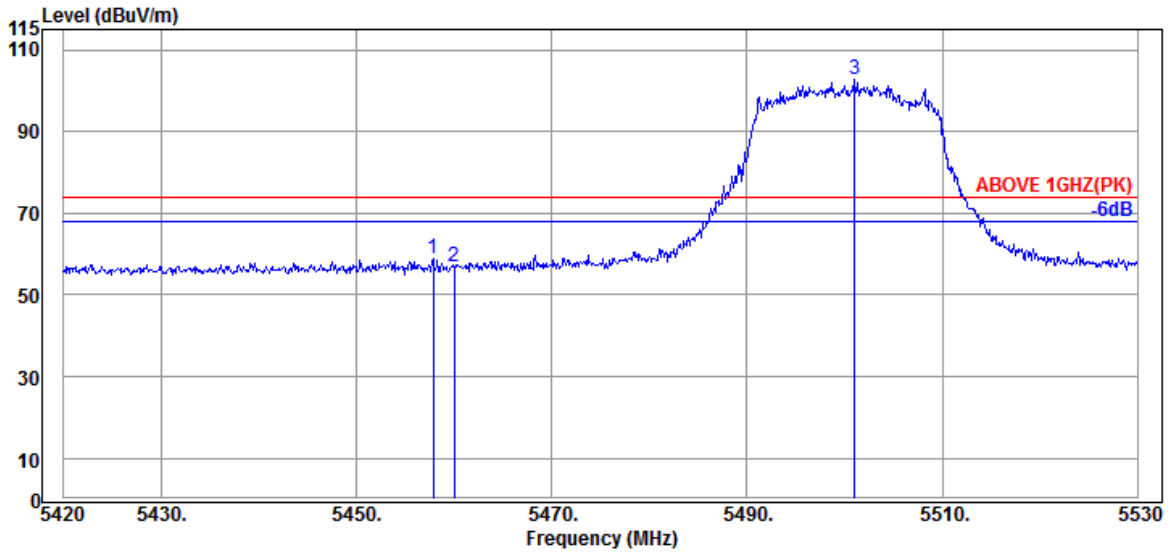

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.840	34.60	9.05	34.21	49.43	58.87	74.00	15.13	Peak
5460.040	34.60	9.05	34.21	47.65	57.09	74.00	16.91	Peak
@ 5501.070	34.70	9.08	34.20	93.28	102.86	---	---	Peak

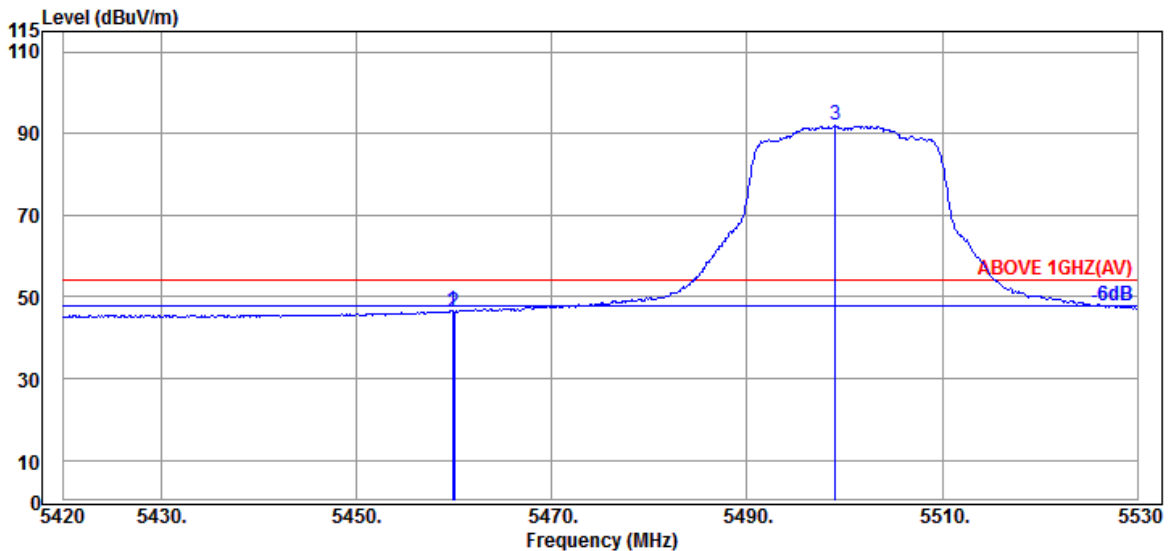


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.820	34.60	9.05	34.21	37.07	46.51	54.00	7.49	Average
5460.040	34.60	9.05	34.21	36.83	46.27	54.00	7.73	Average
@ 5499.090	34.70	9.08	34.20	82.32	91.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

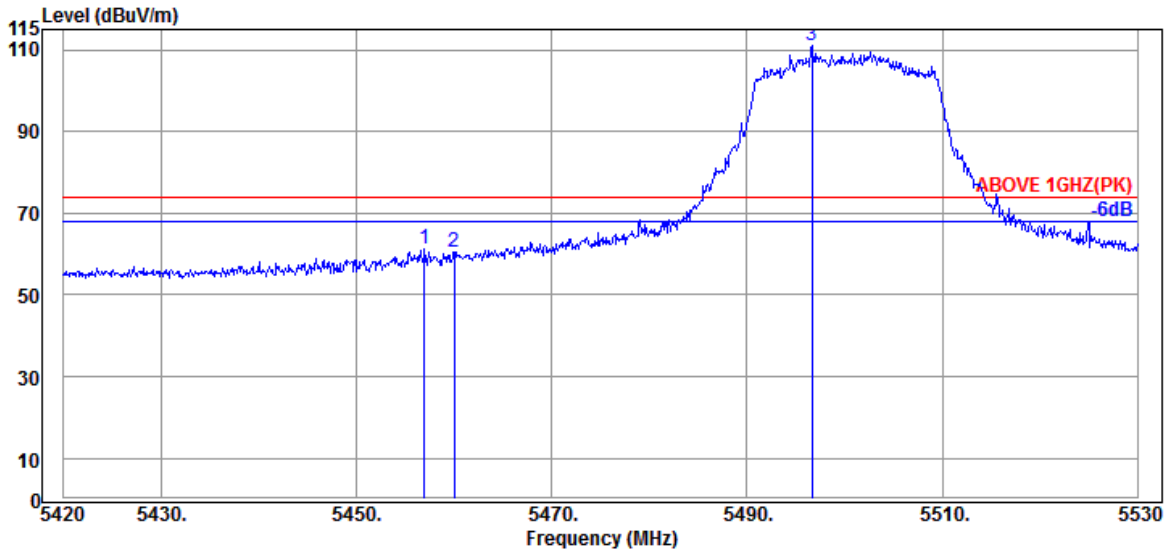

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.960	34.60	9.05	34.21	52.01	61.45	74.00	12.55	Peak
5460.040	34.60	9.05	34.21	50.91	60.35	74.00	13.65	Peak
@ 5496.670	34.70	9.08	34.20	101.55	111.13	---	---	Peak

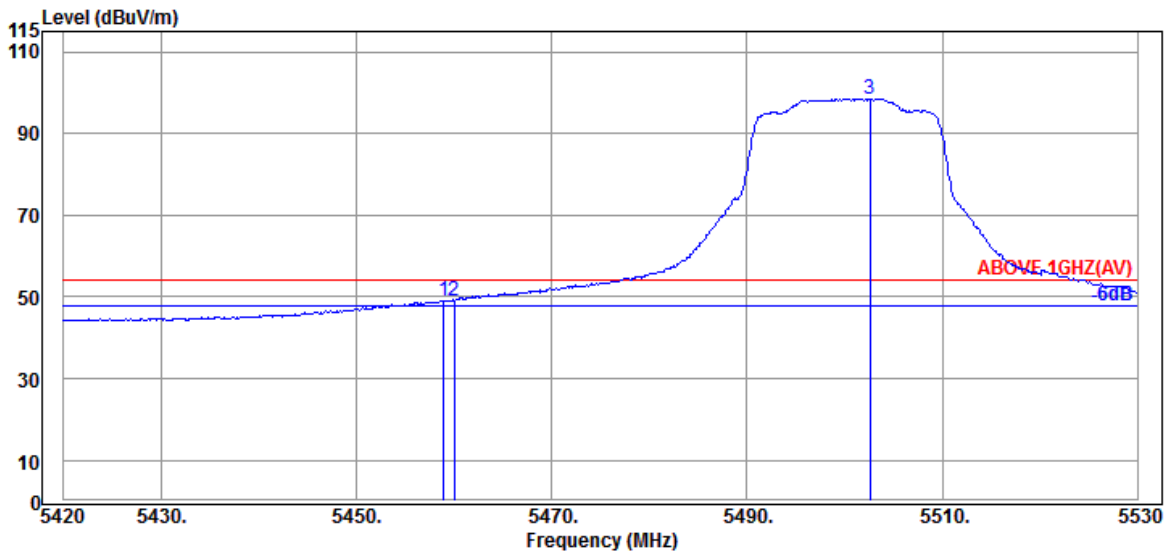


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.940	34.60	9.05	34.21	39.74	49.18	54.00	4.82	Average
5460.040	34.60	9.05	34.21	39.71	49.15	54.00	4.85	Average
@ 5502.610	34.70	9.08	34.20	88.92	98.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

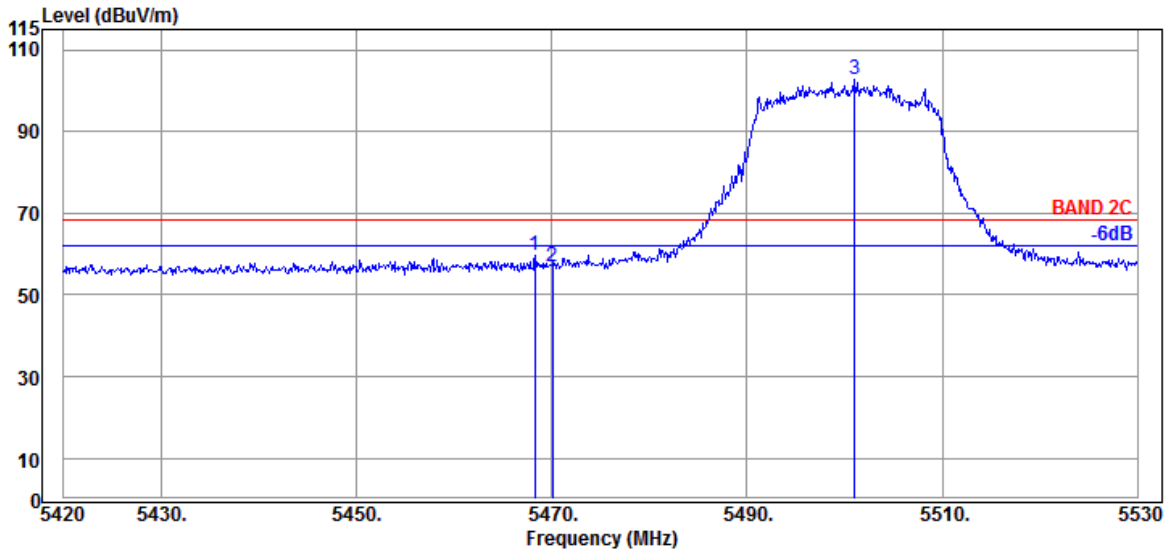

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.63	9.06	34.21	50.15	59.63	68.20	8.57	Peak
5470.050	34.63	9.06	34.21	47.56	57.04	68.20	11.16	Peak
@ 5501.070	34.70	9.08	34.20	93.28	102.86	---	---	Peak

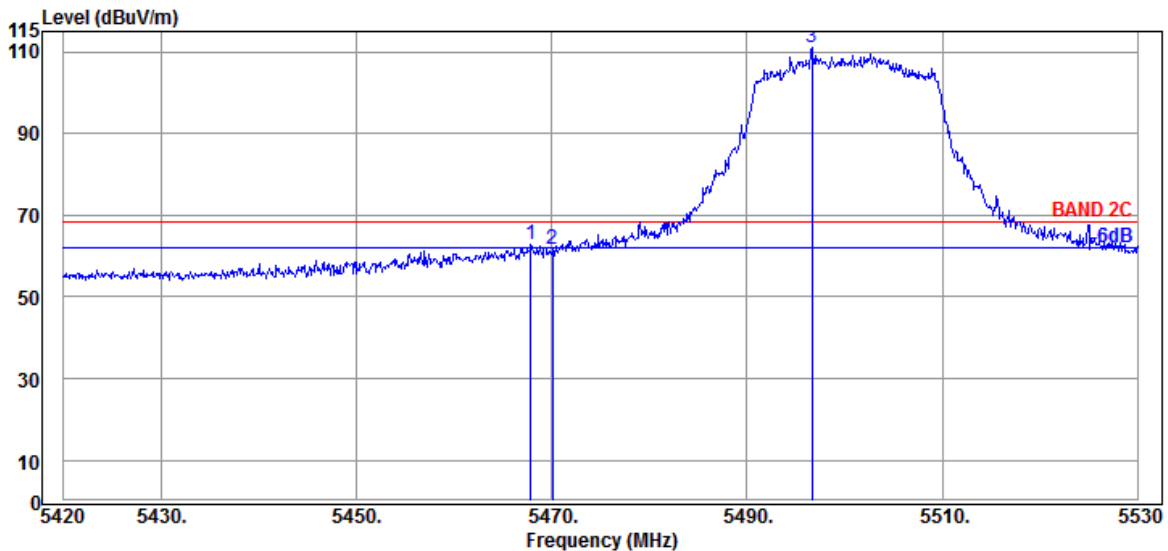


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.63	9.06	34.21	53.32	62.80	68.20	5.40	Peak
5470.050	34.63	9.06	34.21	52.35	61.83	68.20	6.37	Peak
@ 5496.670	34.70	9.08	34.20	101.55	111.13	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

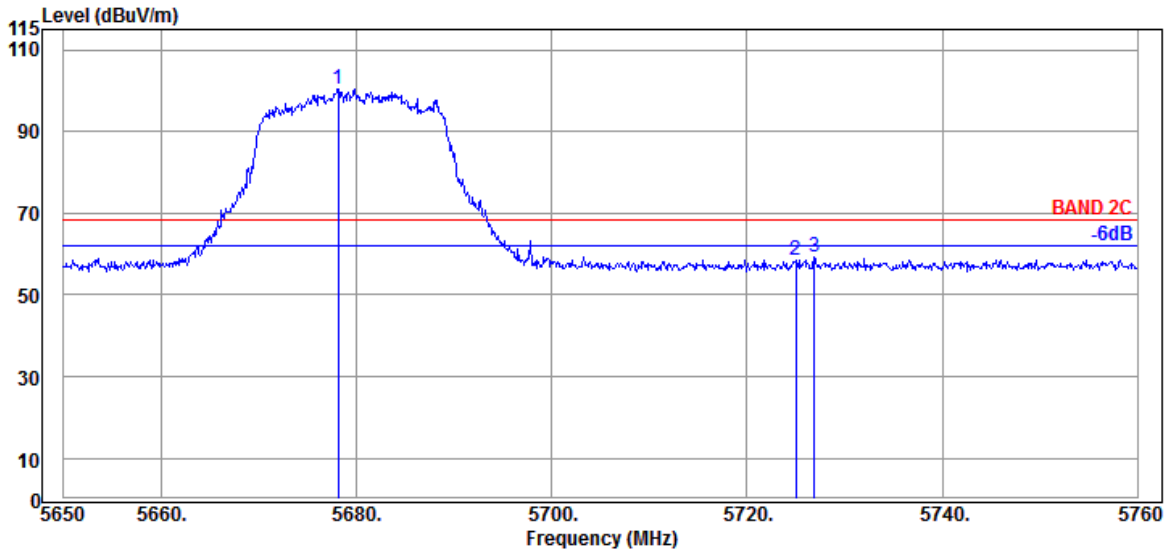

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.160	34.63	9.17	34.29	90.95	100.46	---	---	Peak
5725.020	34.90	9.20	34.30	48.56	58.36	68.20	9.84	Peak
5726.890	34.90	9.20	34.31	49.48	59.27	68.20	8.93	Peak

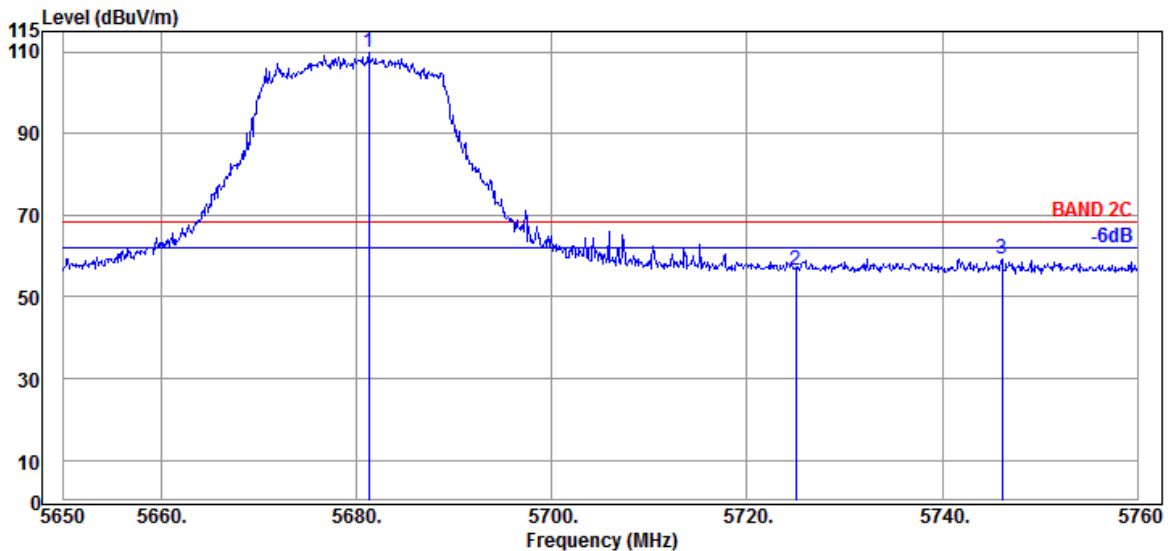


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.240	34.63	9.17	34.29	100.17	109.68	---	---	Peak
5725.020	34.90	9.20	34.30	46.87	56.67	68.20	11.53	Peak
5746.140	35.00	9.20	34.32	49.31	59.19	68.20	9.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

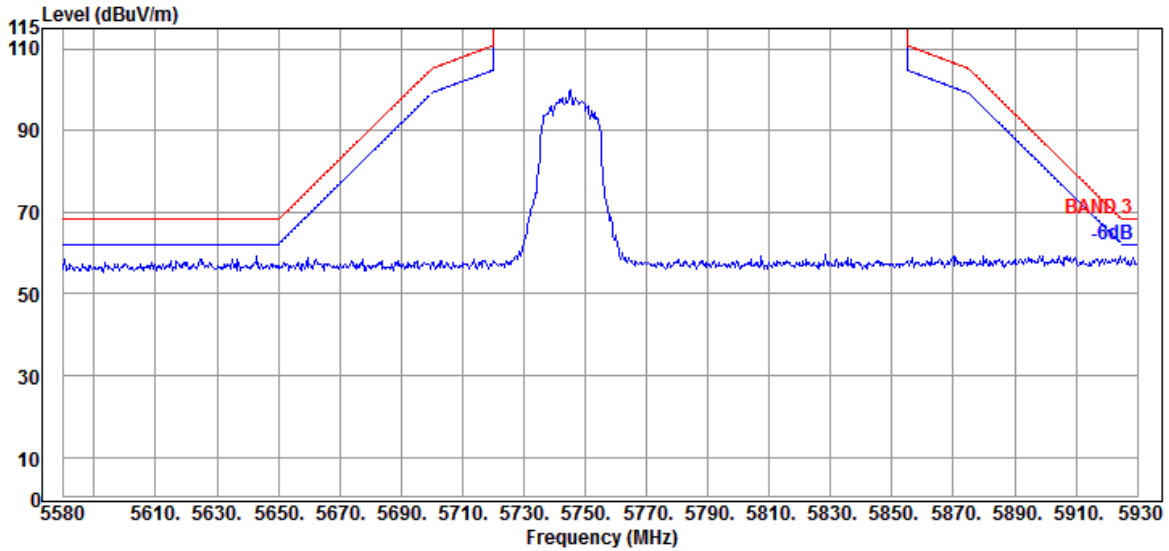


Antenna at Vertical Polarization

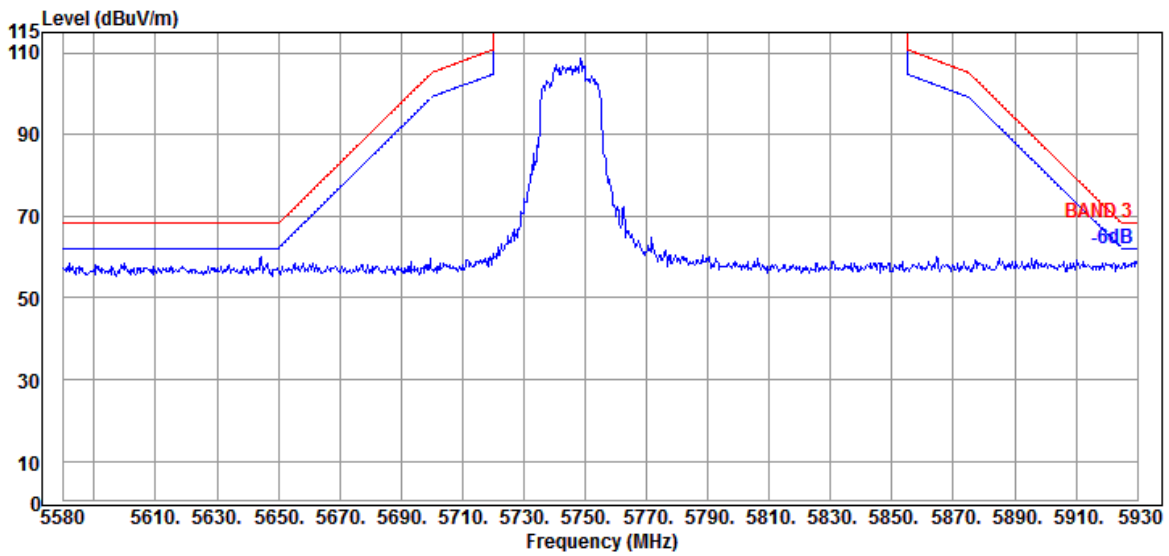


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

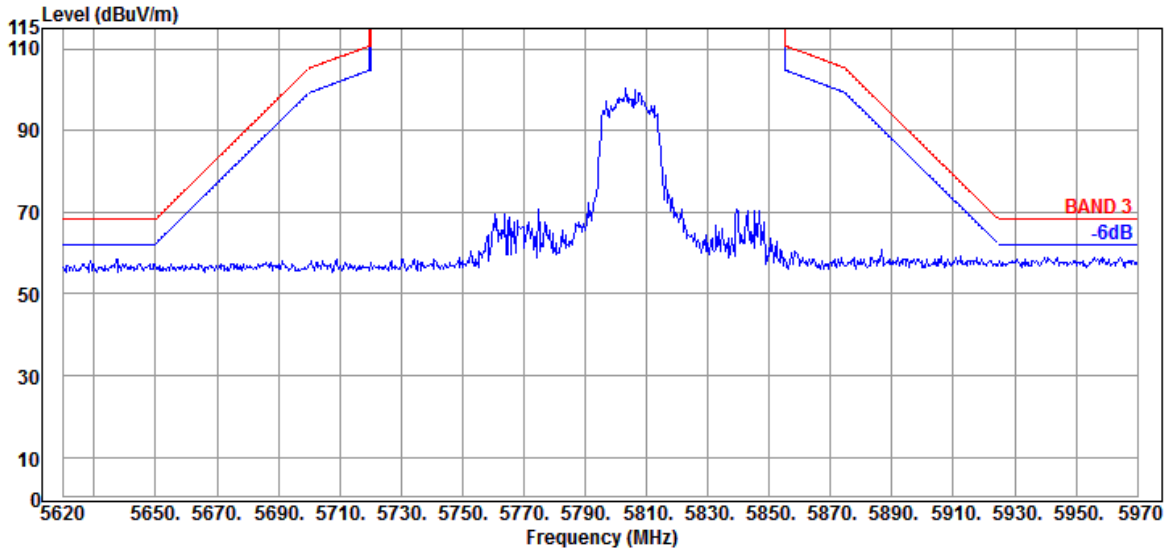

Antenna at Vertical Polarization

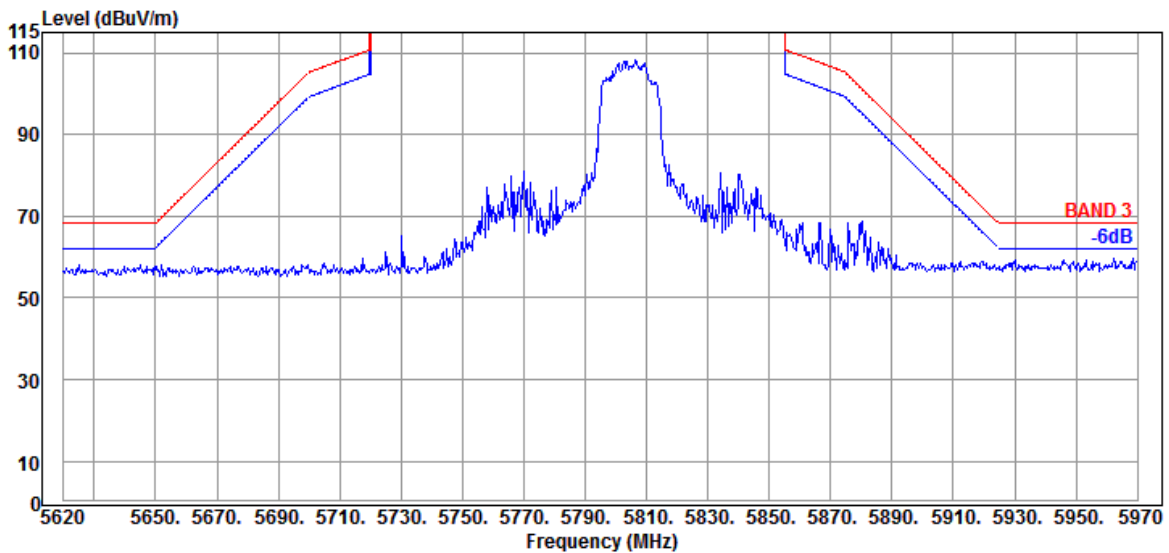


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

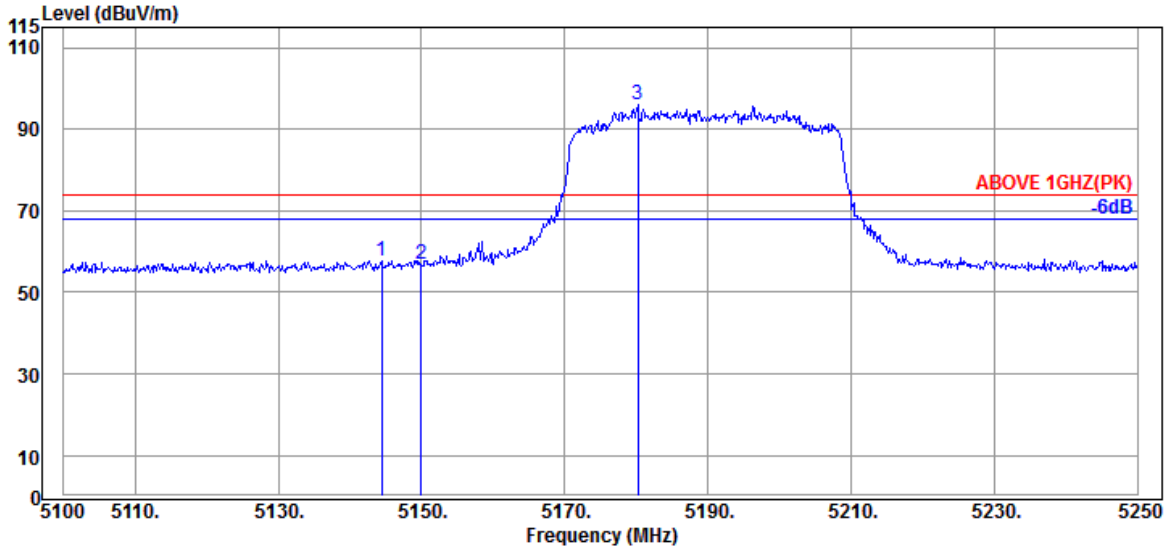

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	34.50	8.88	34.34	48.79	57.83	74.00	16.17	Peak
5149.950	34.50	8.88	34.34	47.67	56.71	74.00	17.29	Peak
@ 5180.250	34.63	8.90	34.32	86.85	96.06	---	---	Peak

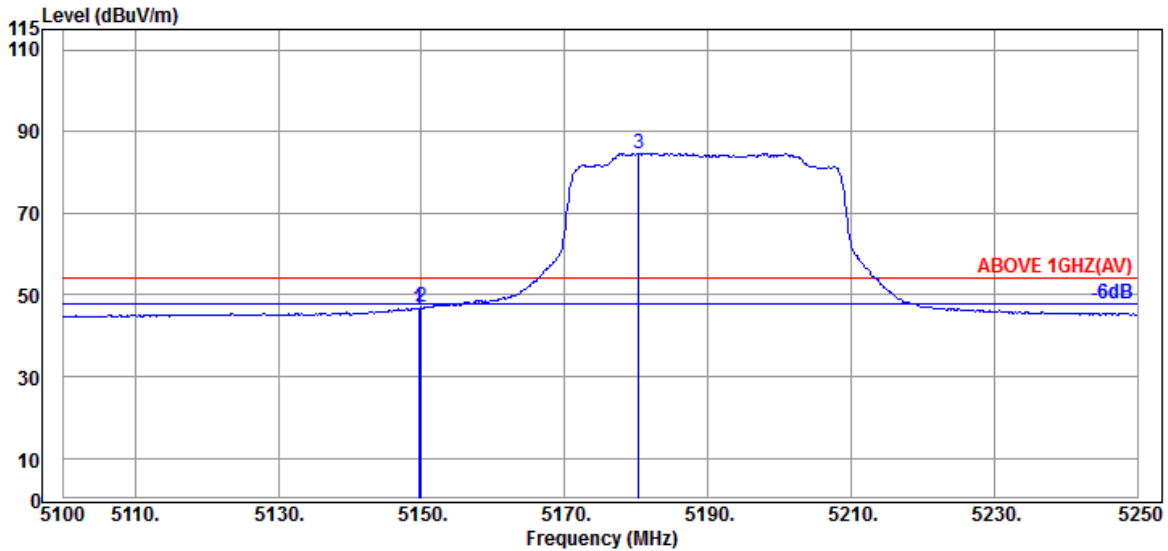


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.50	8.88	34.34	37.71	46.75	54.00	7.25	Average
5149.950	34.50	8.88	34.34	37.79	46.83	54.00	7.17	Average
@ 5180.400	34.63	8.90	34.32	75.53	84.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

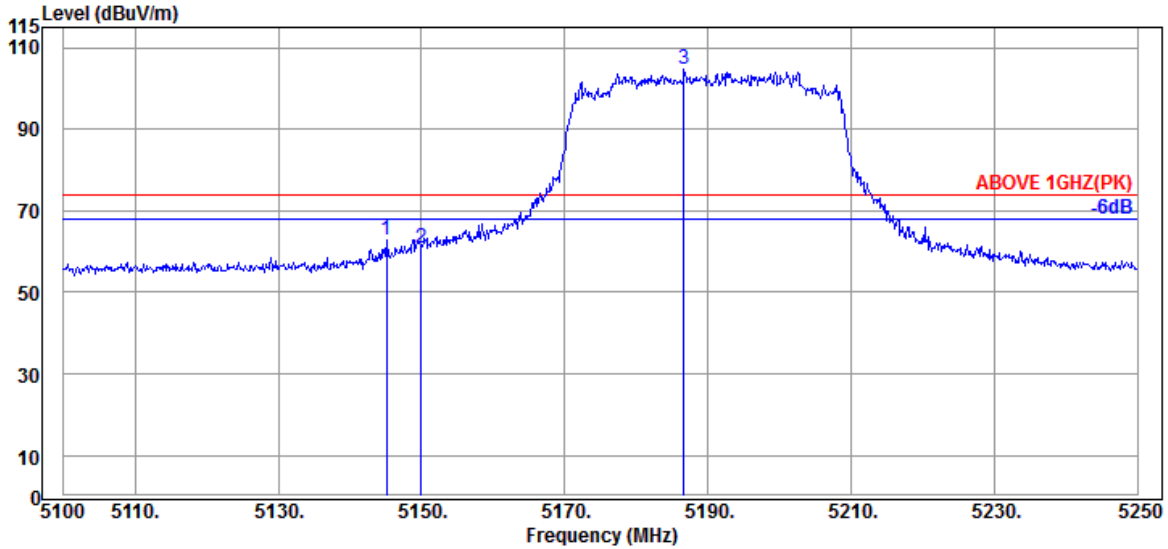

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.150	34.50	8.88	34.34	53.98	63.02	74.00	10.98	Peak
5149.950	34.50	8.88	34.34	51.88	60.92	74.00	13.08	Peak
@ 5186.700	34.70	8.91	34.32	95.30	104.59	---	---	Peak

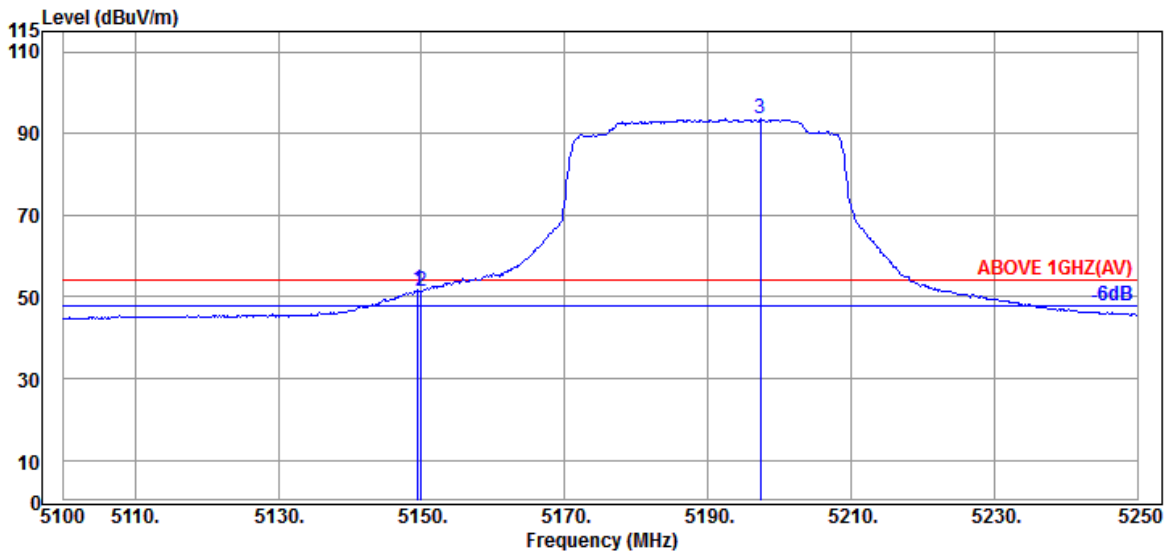


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.88	34.34	42.53	51.57	54.00	2.43	Average
5149.950	34.50	8.88	34.34	42.36	51.40	54.00	2.60	Average
@ 5197.350	34.70	8.91	34.32	84.27	93.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

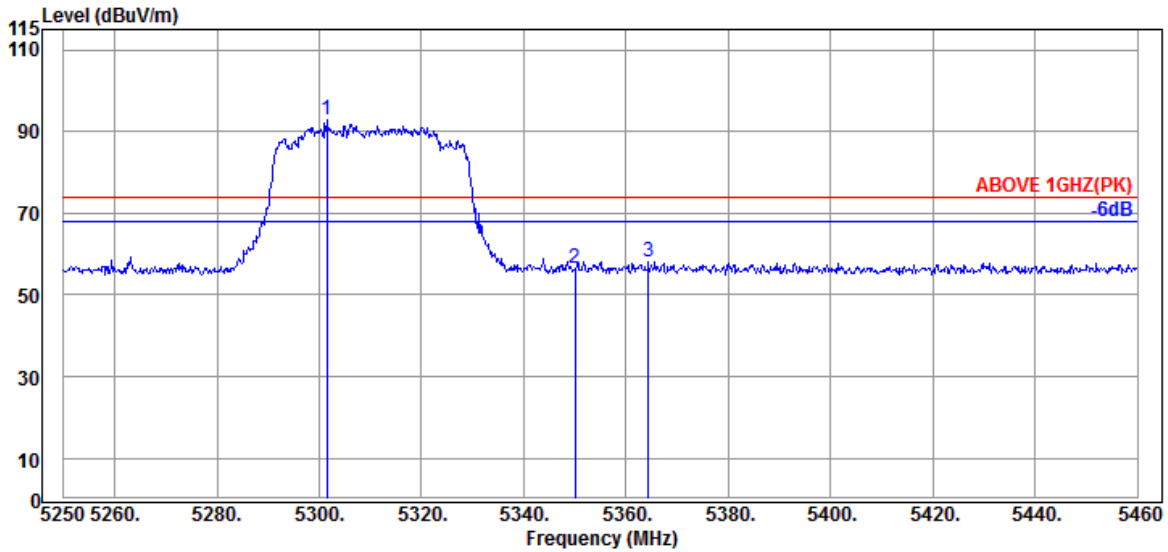

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.450	34.40	8.97	34.28	83.82	92.91	---	---	Peak
5349.960	34.90	8.99	34.26	46.93	56.56	74.00	17.44	Peak
5364.450	34.87	9.00	34.25	48.48	58.10	74.00	15.90	Peak

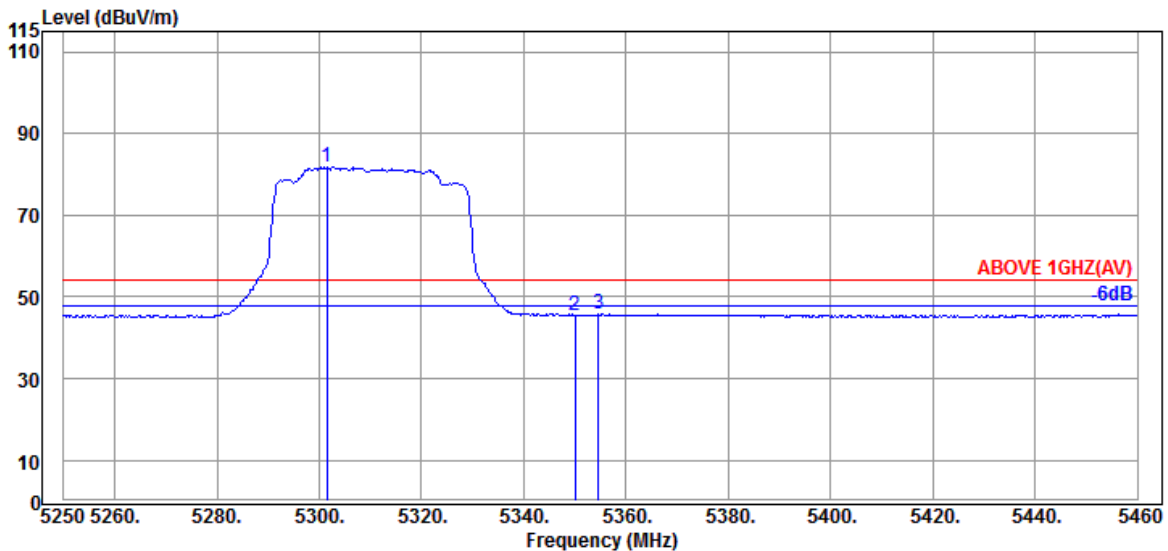

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.450	34.40	8.97	34.28	72.58	81.67	---	---	Average
5349.960	34.90	8.99	34.26	35.99	45.62	54.00	8.38	Average
5354.580	34.87	9.00	34.26	36.11	45.72	54.00	8.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

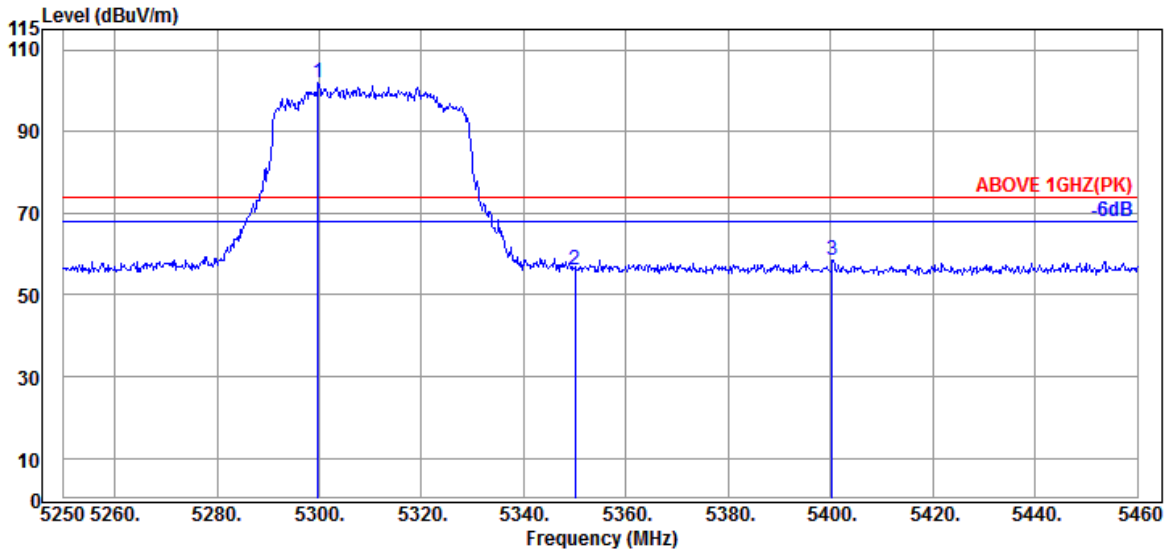

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.770	34.40	8.97	34.28	92.68	101.77	---	---	Peak
5349.960	34.90	8.99	34.26	46.42	56.05	74.00	17.95	Peak
5400.360	34.80	9.02	34.23	48.81	58.40	74.00	15.60	Peak

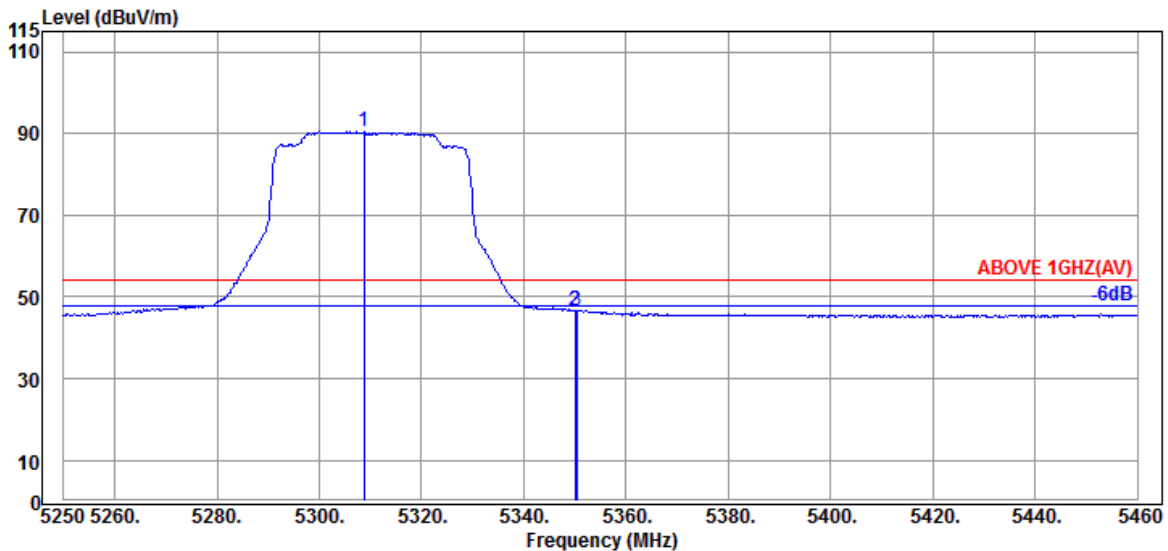


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.800	34.57	8.98	34.28	81.11	90.38	---	---	Average
5349.960	34.90	8.99	34.26	37.05	46.68	54.00	7.32	Average
5350.380	34.90	8.99	34.26	37.06	46.69	54.00	7.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

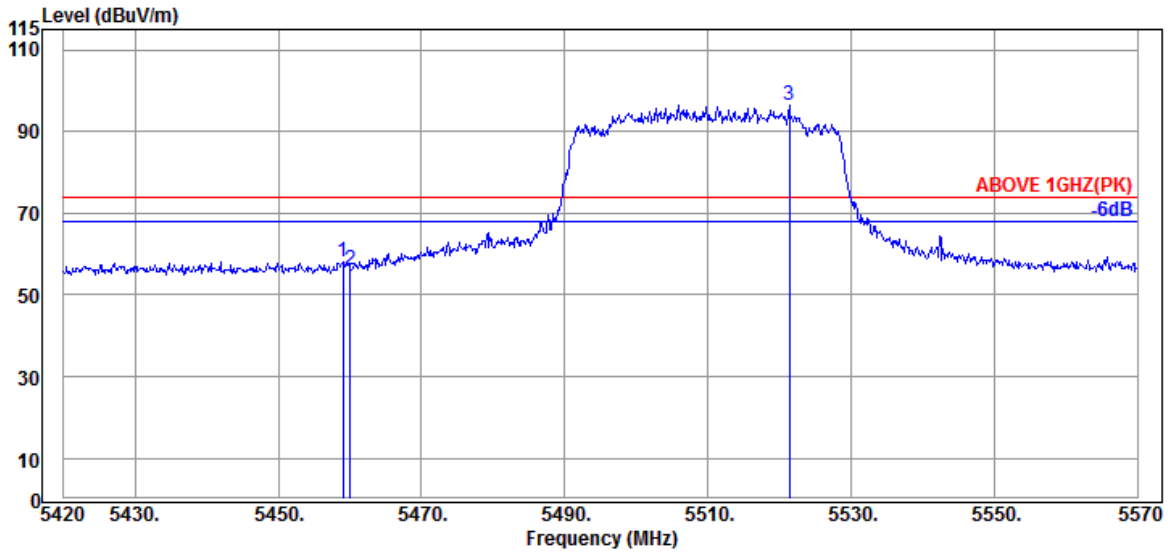

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	48.80	58.24	74.00	15.76	Peak
5460.050	34.60	9.05	34.21	46.81	56.25	74.00	17.75	Peak
@ 5521.400	34.70	9.09	34.21	86.98	96.56	---	---	Peak

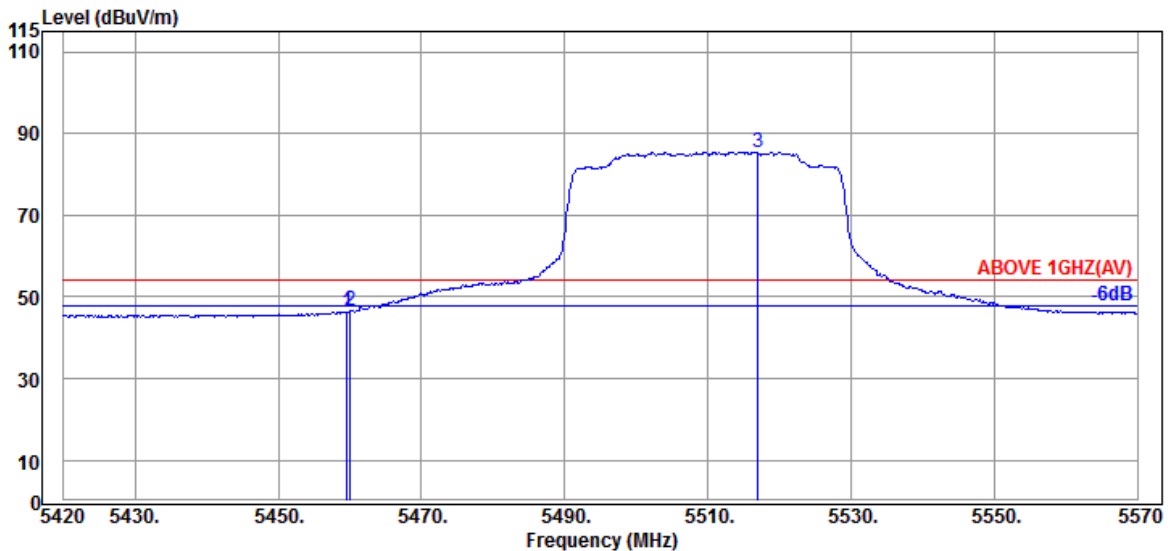


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.60	9.05	34.21	36.99	46.43	54.00	7.57	Average
5460.050	34.60	9.05	34.21	37.09	46.53	54.00	7.47	Average
@ 5517.050	34.70	9.09	34.21	75.86	85.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

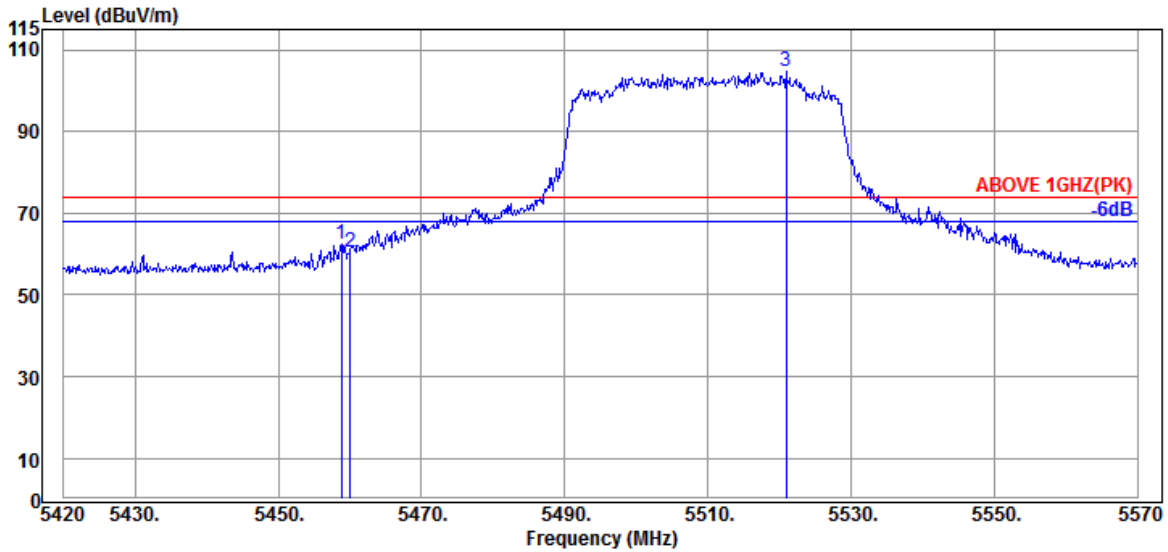

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.850	34.60	9.05	34.21	53.07	62.51	74.00	11.49	Peak
5460.050	34.60	9.05	34.21	51.05	60.49	74.00	13.51	Peak
@ 5520.950	34.70	9.09	34.21	94.99	104.57	---	---	Peak

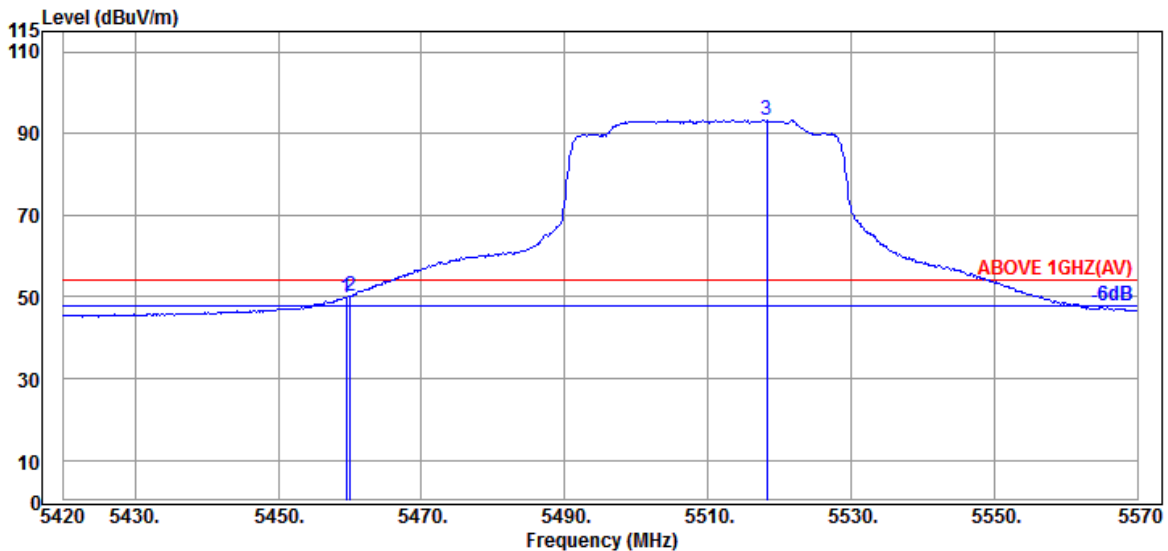


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.450	34.60	9.05	34.21	40.53	49.97	54.00	4.03	Average
5460.050	34.60	9.05	34.21	40.84	50.28	54.00	3.72	Average
@ 5518.250	34.70	9.09	34.21	83.72	93.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

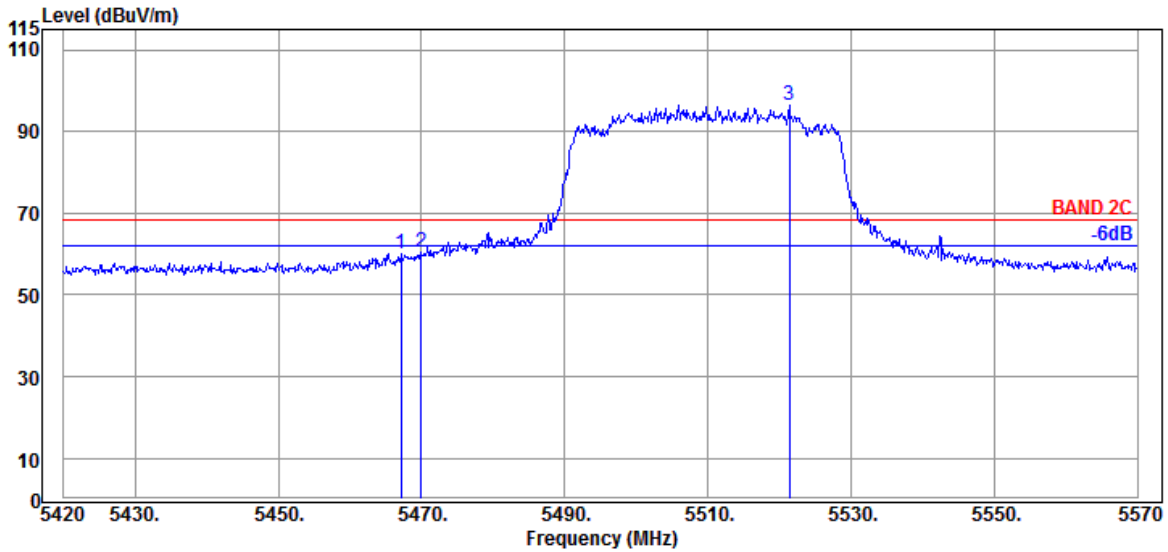

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.63	9.06	34.21	50.61	60.09	68.20	8.11	Peak
5469.950	34.63	9.06	34.21	50.87	60.35	68.20	7.85	Peak
@ 5521.400	34.70	9.09	34.21	86.98	96.56	---	---	Peak

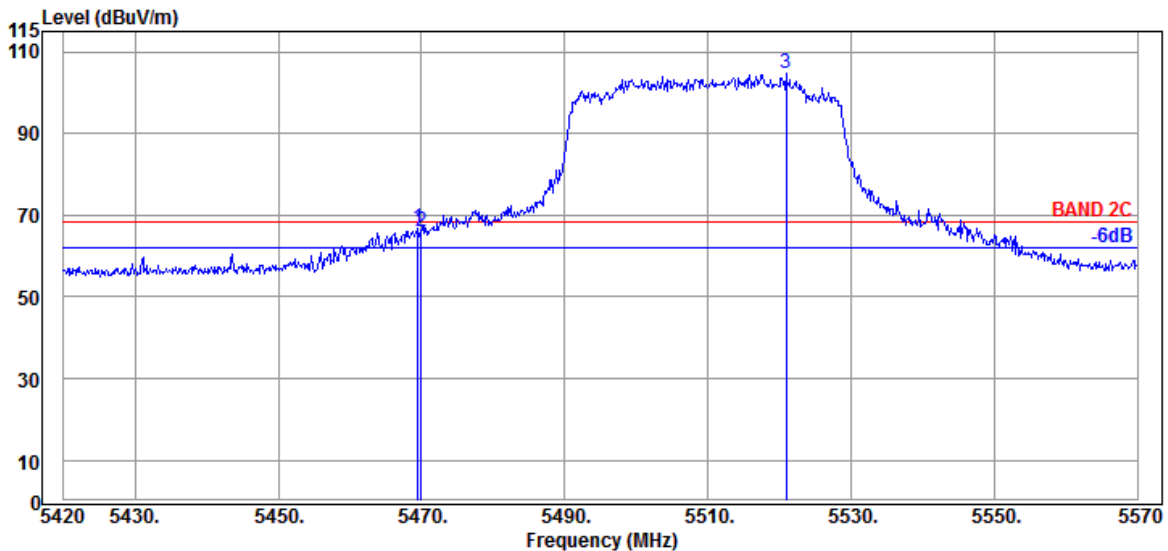


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.63	9.06	34.21	57.16	66.64	68.20	1.56	Peak
5469.950	34.63	9.06	34.21	56.55	66.03	68.20	2.17	Peak
@ 5520.950	34.70	9.09	34.21	94.99	104.57	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

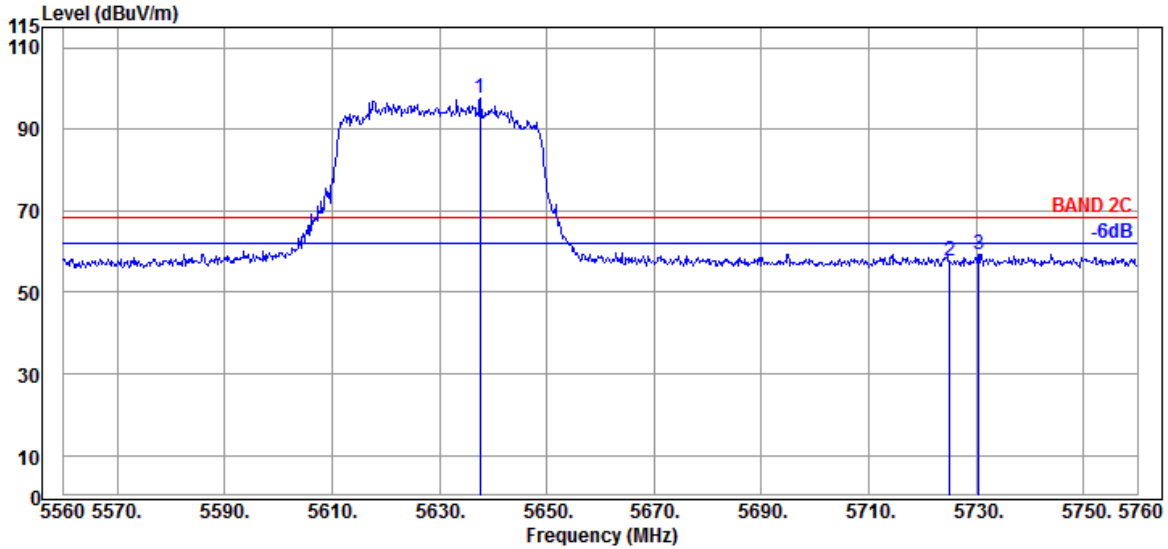

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5637.600	34.47	9.14	34.27	88.22	97.56	---	---	Peak
	5725.000	34.90	9.20	34.30	47.87	57.67	68.20	10.53	Peak
	5730.400	34.90	9.20	34.31	49.48	59.27	68.20	8.93	Peak

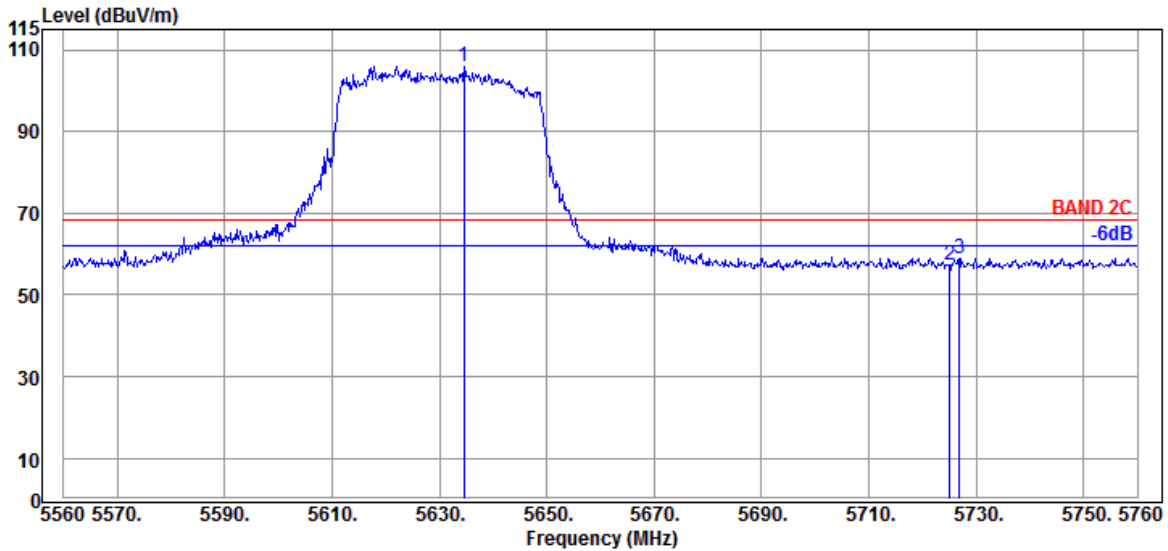


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5634.600	34.47	9.14	34.27	96.72	106.06	---	---	Peak
	5725.000	34.90	9.20	34.30	47.51	57.31	68.20	10.89	Peak
	5726.800	34.90	9.20	34.31	49.15	58.94	68.20	9.26	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

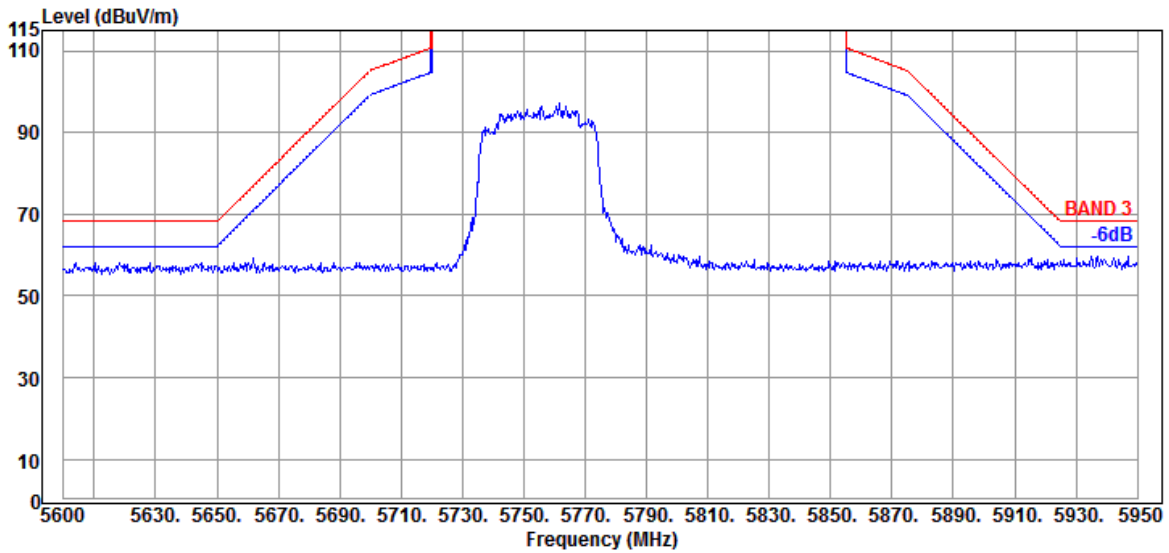


Antenna at Vertical Polarization

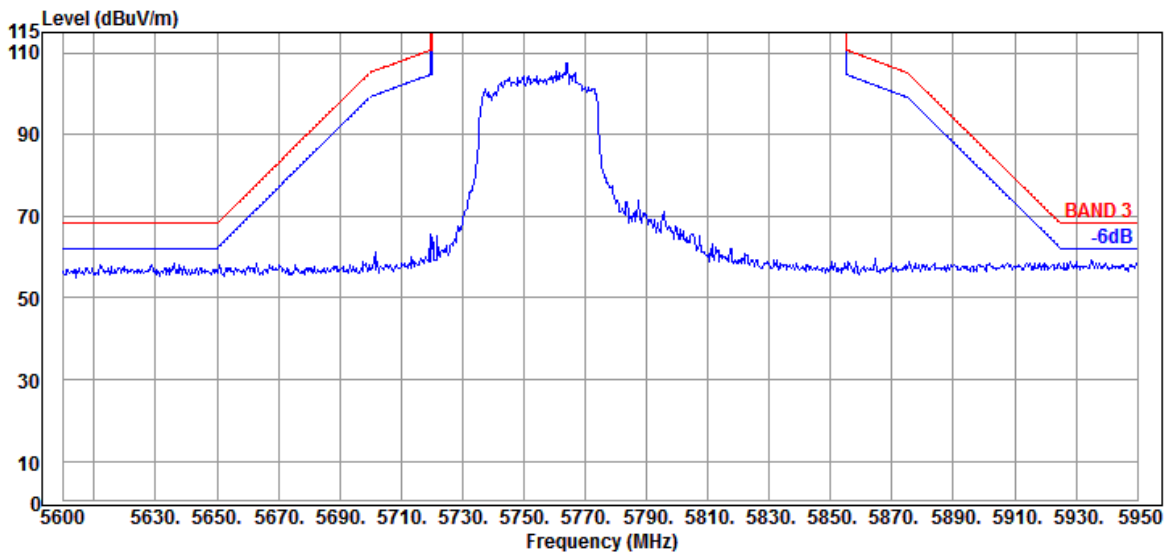


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

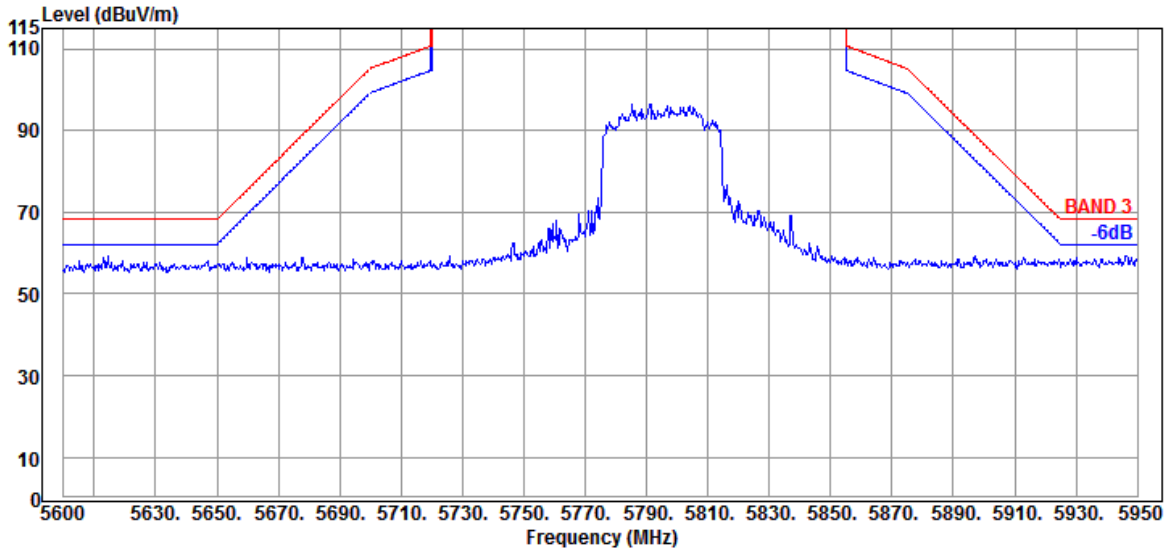

Antenna at Vertical Polarization

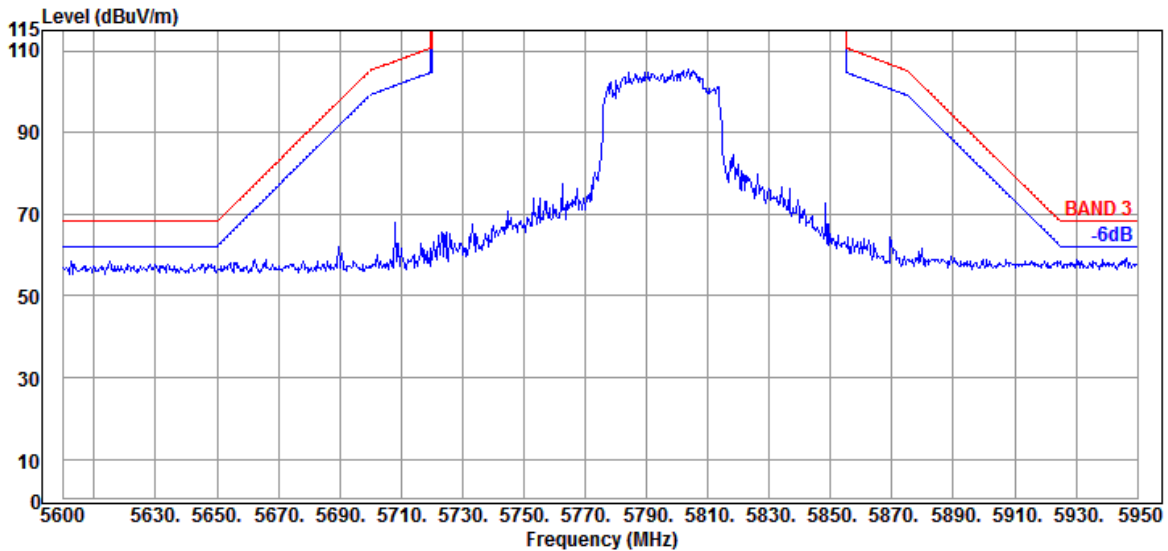


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

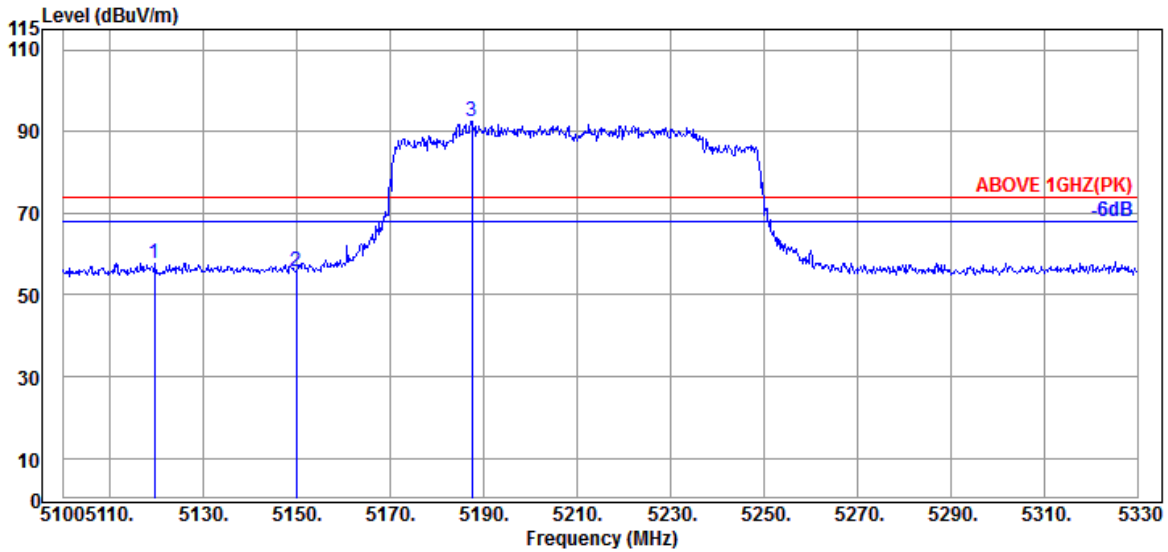

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.550	34.30	8.87	34.35	49.07	57.89	74.00	16.11	Peak
5149.910	34.50	8.88	34.34	46.81	55.85	74.00	18.15	Peak
@ 5187.400	34.70	8.91	34.32	83.20	92.49	---	---	Peak

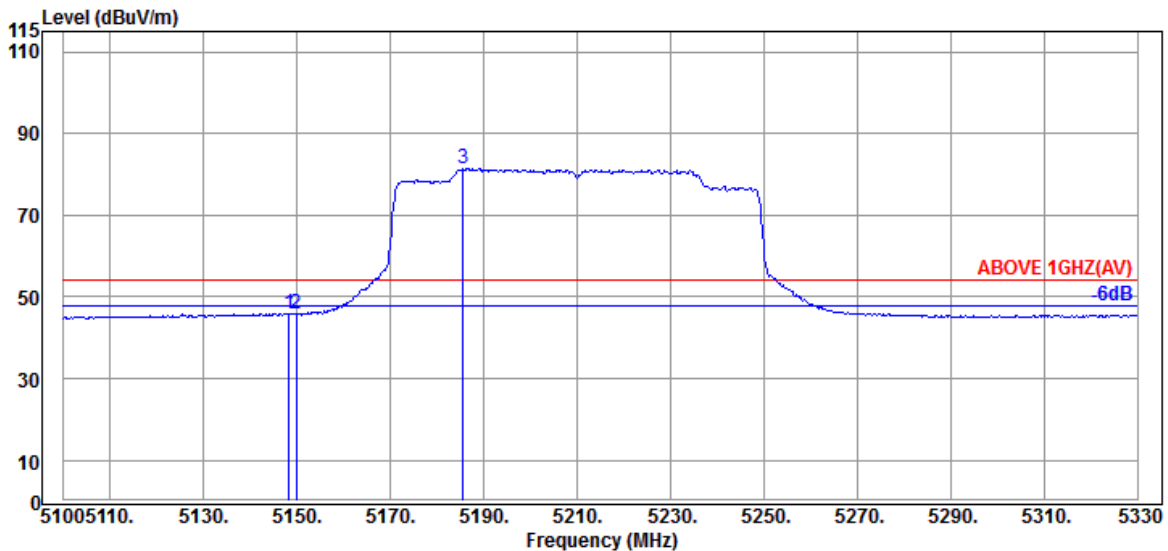

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.50	8.88	34.34	36.93	45.97	54.00	8.03	Average
5149.910	34.50	8.88	34.34	36.72	45.76	54.00	8.24	Average
@ 5185.560	34.63	8.90	34.32	72.21	81.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

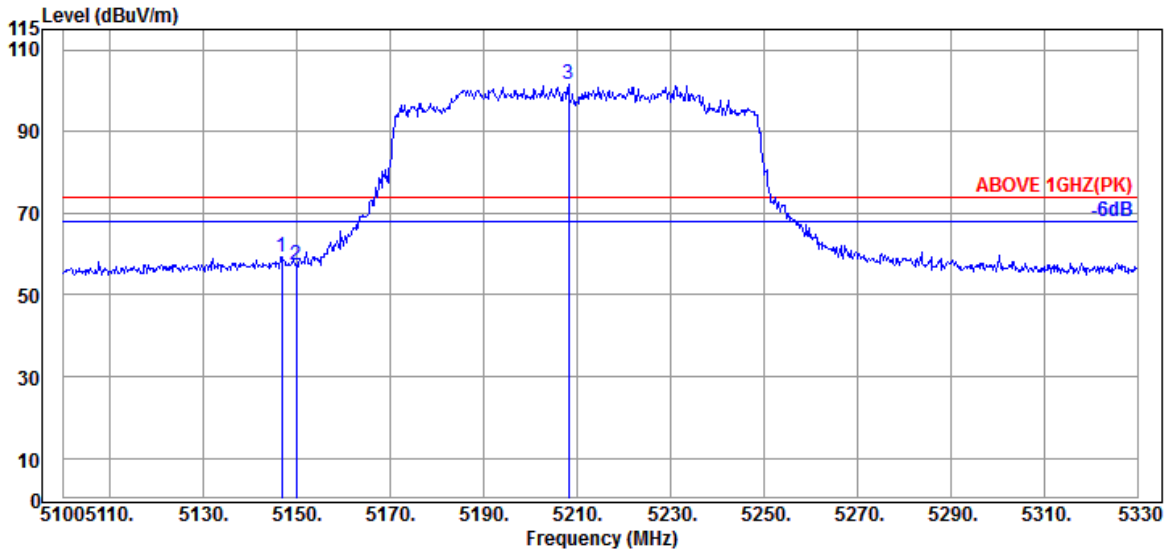

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.50	8.88	34.34	50.41	59.45	74.00	14.55	Peak
5149.910	34.50	8.88	34.34	48.22	57.26	74.00	16.74	Peak
@ 5208.100	34.65	8.92	34.31	92.25	101.51	---	---	Peak

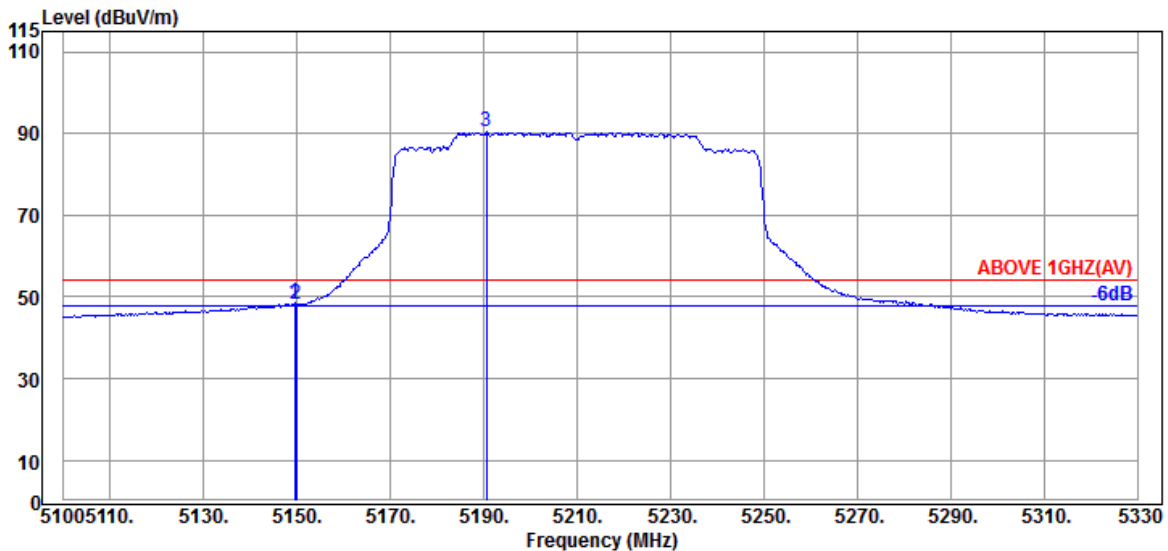


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.50	8.88	34.34	39.48	48.52	54.00	5.48	Average
5149.910	34.50	8.88	34.34	39.10	48.14	54.00	5.86	Average
@ 5190.620	34.70	8.91	34.32	81.01	90.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

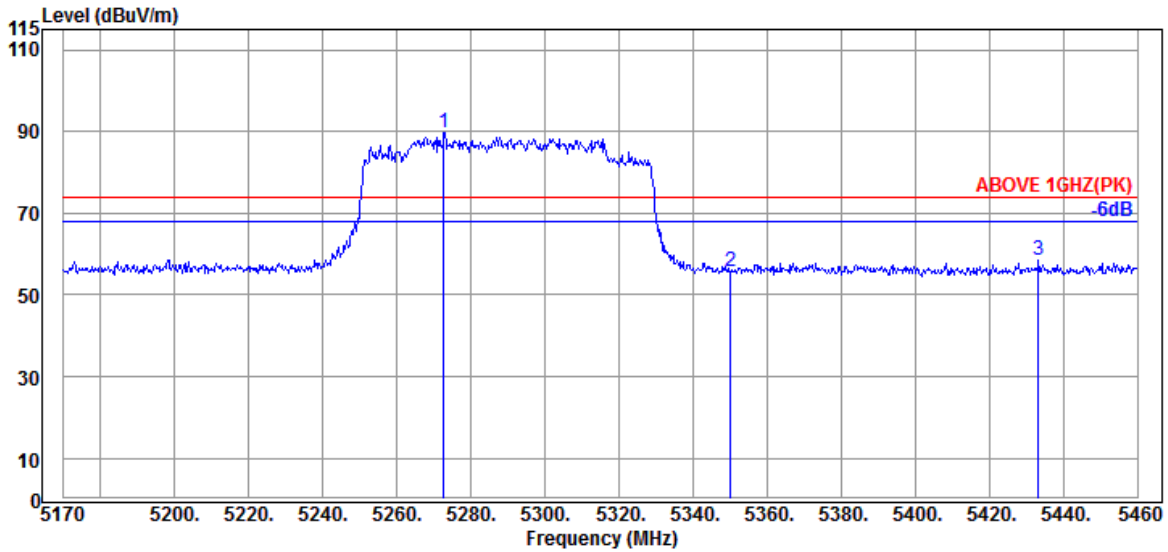

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.660	34.47	8.95	34.29	80.74	89.87	---	---	Peak
5350.090	34.90	8.99	34.26	46.04	55.67	74.00	18.33	Peak
5433.320	34.65	9.04	34.23	48.96	58.42	74.00	15.58	Peak

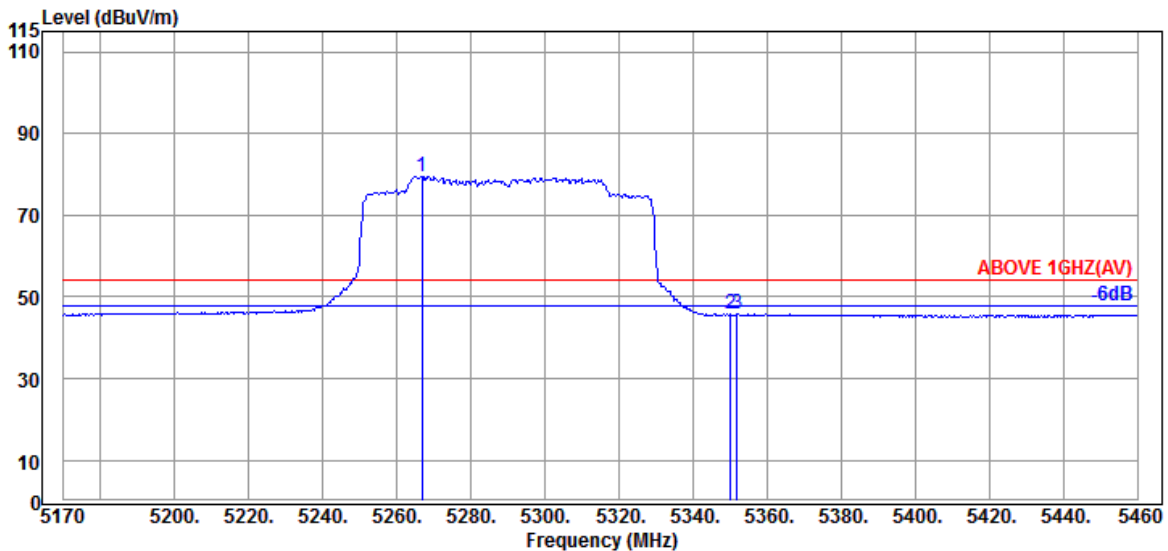


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.860	34.47	8.95	34.29	70.39	79.52	---	---	Average
5350.090	34.90	8.99	34.26	36.02	45.65	54.00	8.35	Average
5351.830	34.90	8.99	34.26	36.21	45.84	54.00	8.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

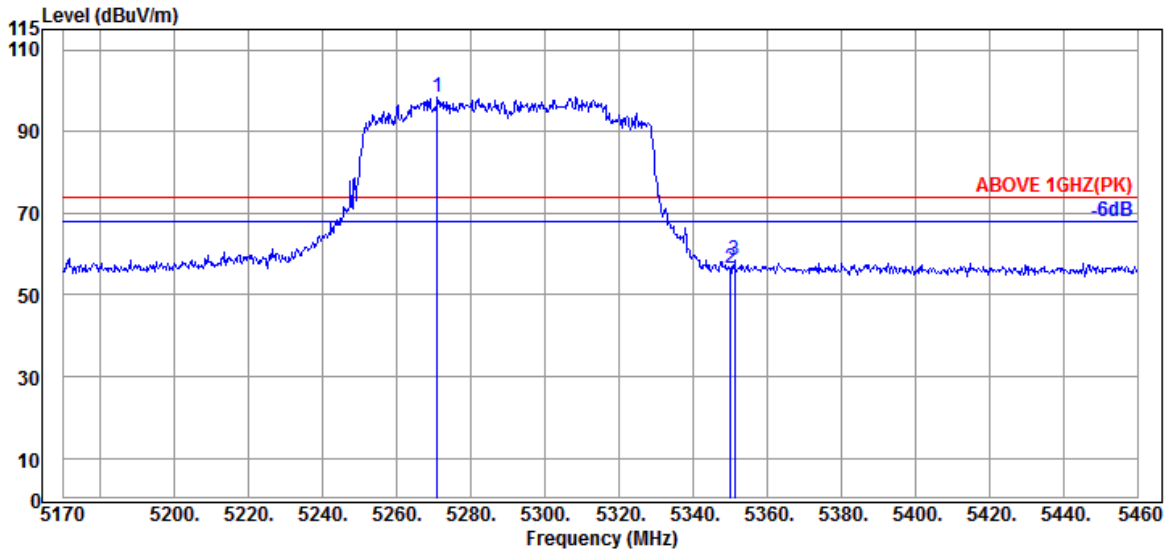

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.920	34.47	8.95	34.29	89.44	98.57	---	---	Peak
5350.090	34.90	8.99	34.26	46.81	56.44	74.00	17.56	Peak
5351.250	34.90	8.99	34.26	48.73	58.36	74.00	15.64	Peak

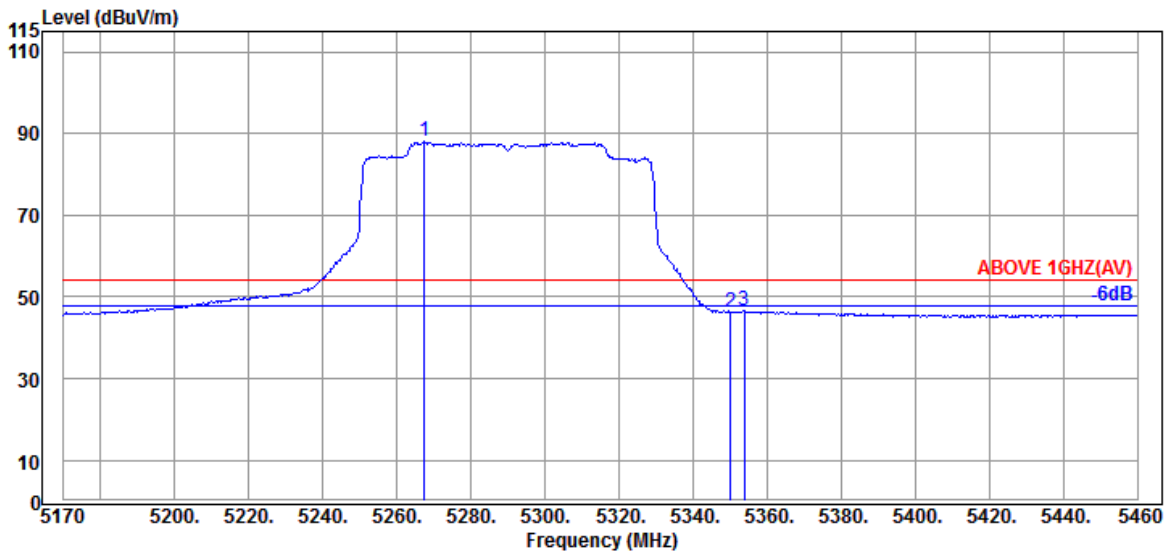


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.440	34.47	8.95	34.29	78.81	87.94	---	---	Average
5350.090	34.90	8.99	34.26	36.53	46.16	54.00	7.84	Average
5353.860	34.90	8.99	34.26	36.88	46.51	54.00	7.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

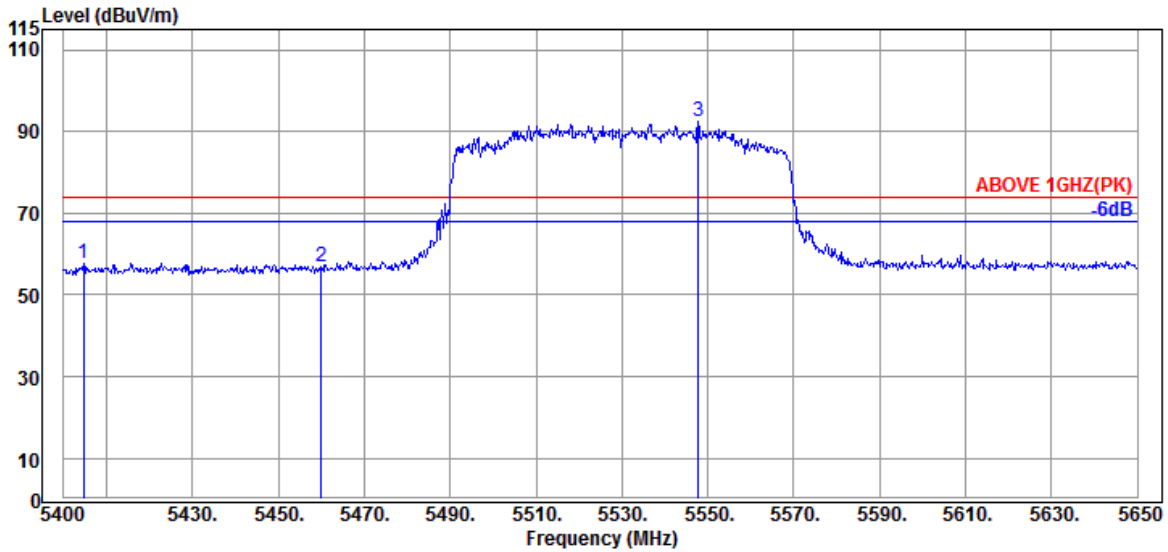

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5404.750	34.75	9.03	34.23	48.30	57.85	74.00	16.15	Peak
5460.000	34.60	9.05	34.21	47.47	56.91	74.00	17.09	Peak
@ 5547.750	34.70	9.10	34.23	83.05	92.62	---	---	Peak

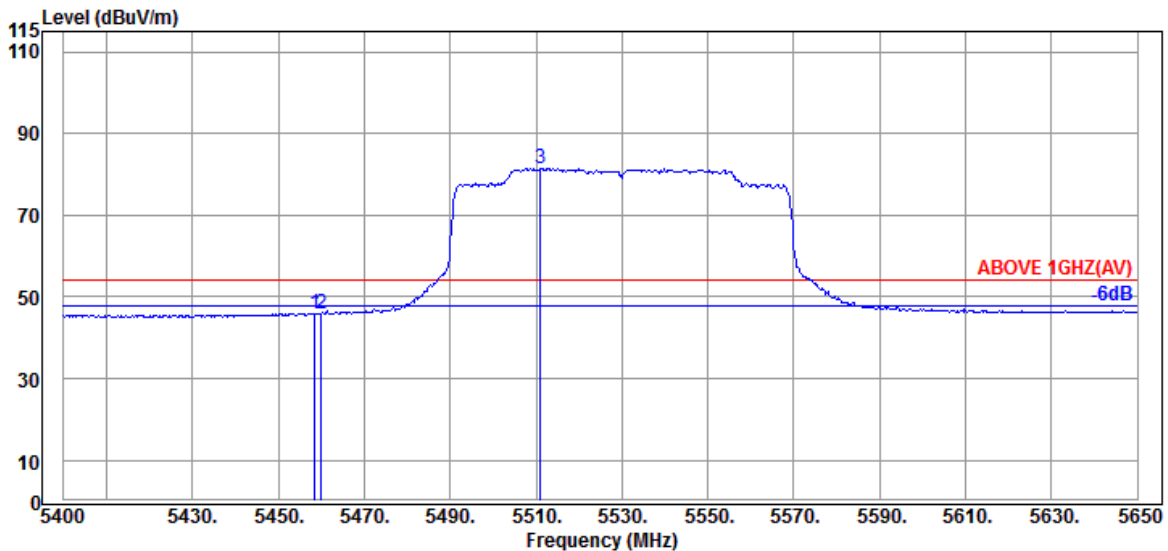


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.60	9.05	34.21	36.51	45.95	54.00	8.05	Average
5460.000	34.60	9.05	34.21	36.34	45.78	54.00	8.22	Average
@ 5511.000	34.70	9.08	34.21	72.01	81.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

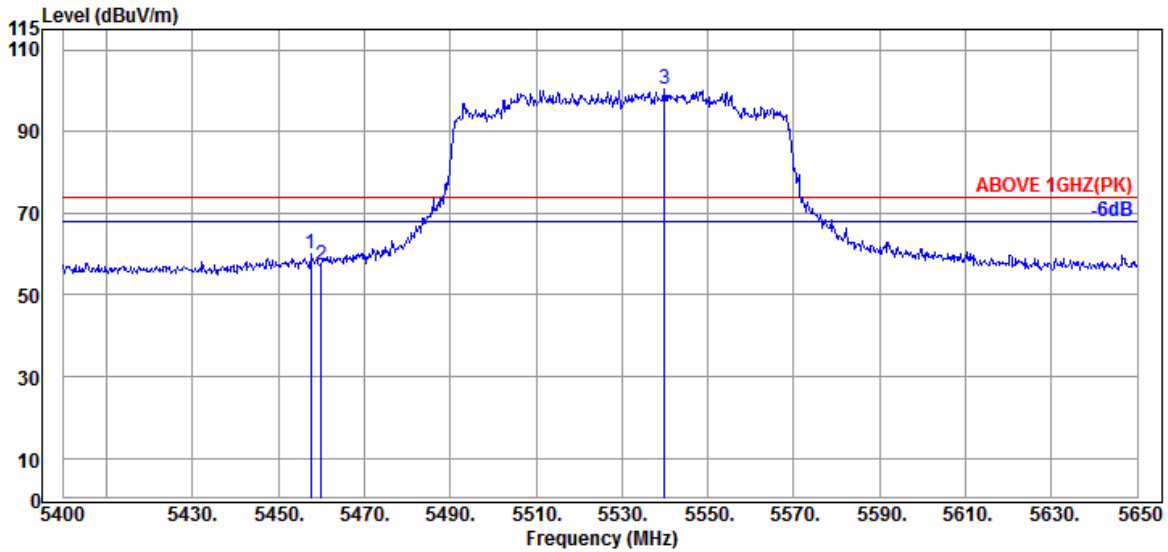

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	9.05	34.21	50.49	59.93	74.00	14.07	Peak
5460.000	34.60	9.05	34.21	48.03	57.47	74.00	16.53	Peak
@ 5540.000	34.70	9.09	34.22	90.89	100.46	---	---	Peak

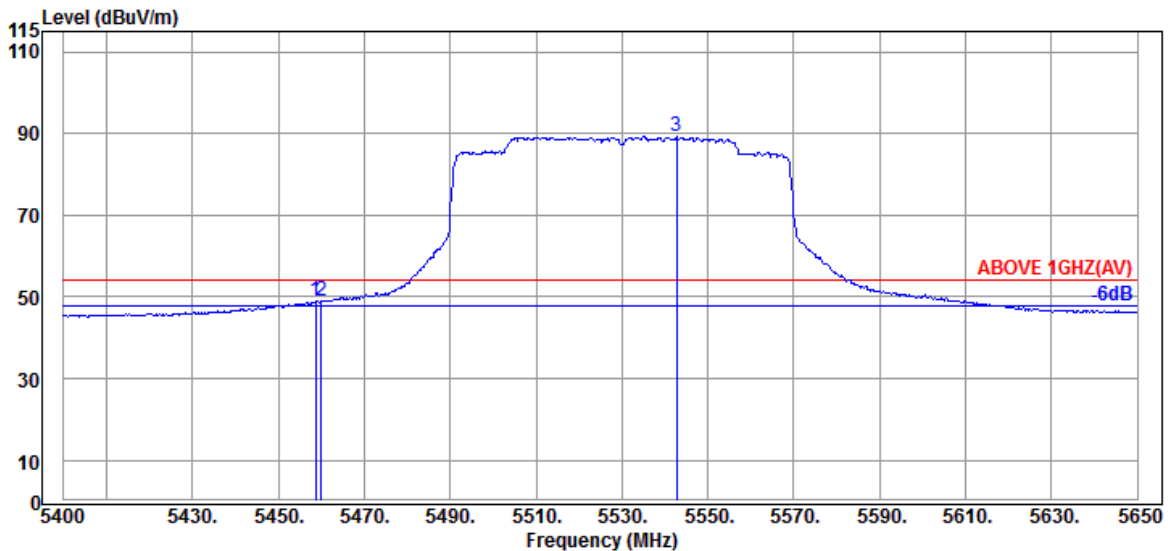


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.60	9.05	34.21	39.74	49.18	54.00	4.82	Average
5460.000	34.60	9.05	34.21	39.49	48.93	54.00	5.07	Average
@ 5542.750	34.70	9.09	34.23	79.74	89.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

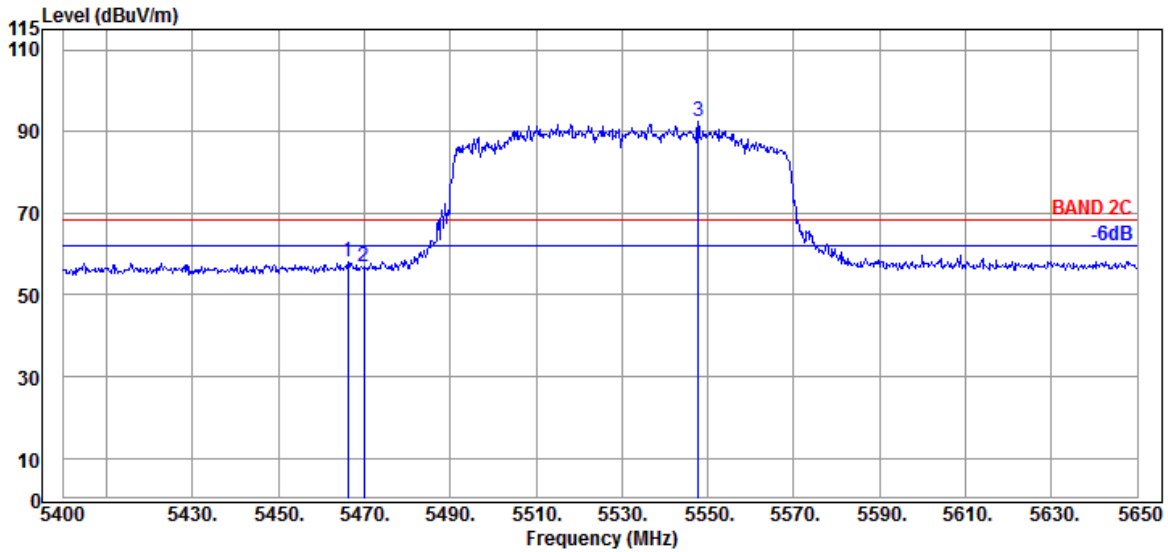

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.250	34.63	9.06	34.21	48.45	57.93	68.20	10.27	Peak
5470.000	34.63	9.06	34.21	47.50	56.98	68.20	11.22	Peak
@ 5547.750	34.70	9.10	34.23	83.05	92.62	---	---	Peak

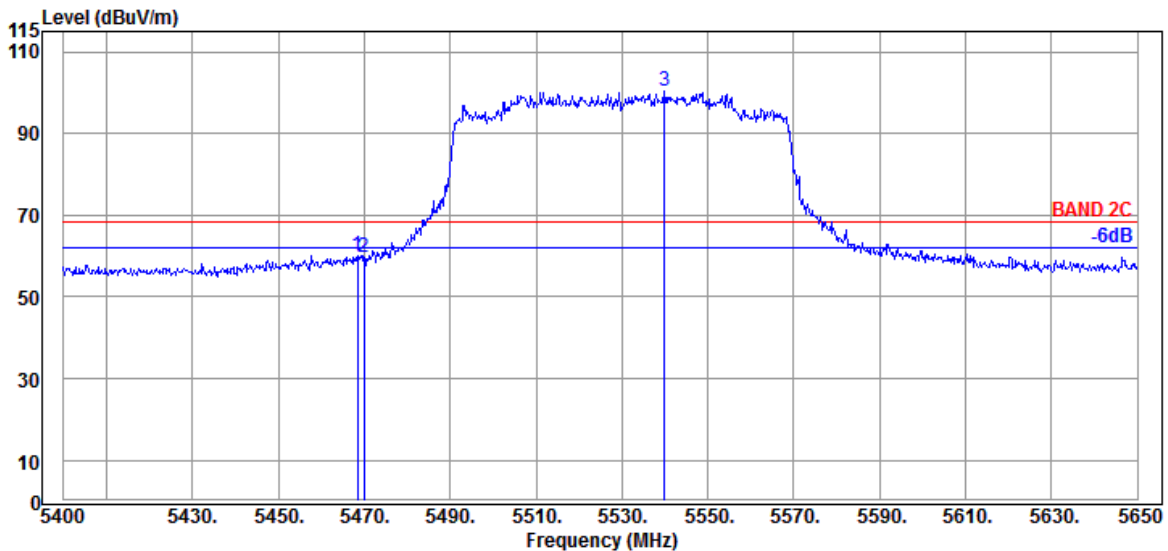


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.63	9.06	34.21	50.52	60.00	68.20	8.20	Peak
5470.000	34.63	9.06	34.21	50.38	59.86	68.20	8.34	Peak
@ 5540.000	34.70	9.09	34.22	90.89	100.46	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

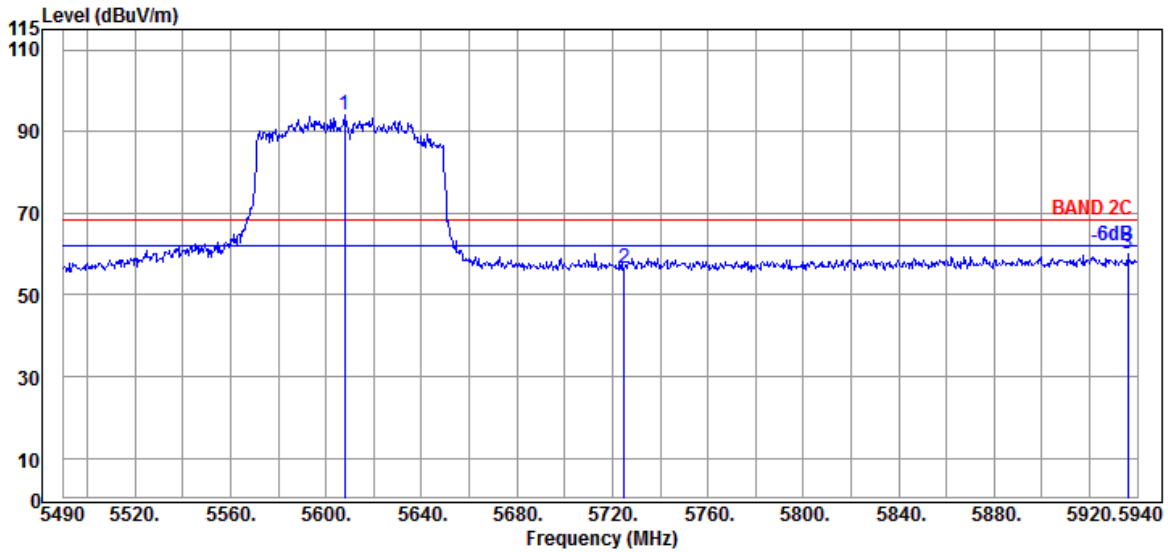

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.900	34.43	9.14	34.25	84.75	94.07	---	---	Peak
5724.900	34.90	9.20	34.30	46.72	56.52	68.20	11.68	Peak
5935.950	35.73	9.30	34.40	49.49	60.12	68.20	8.08	Peak

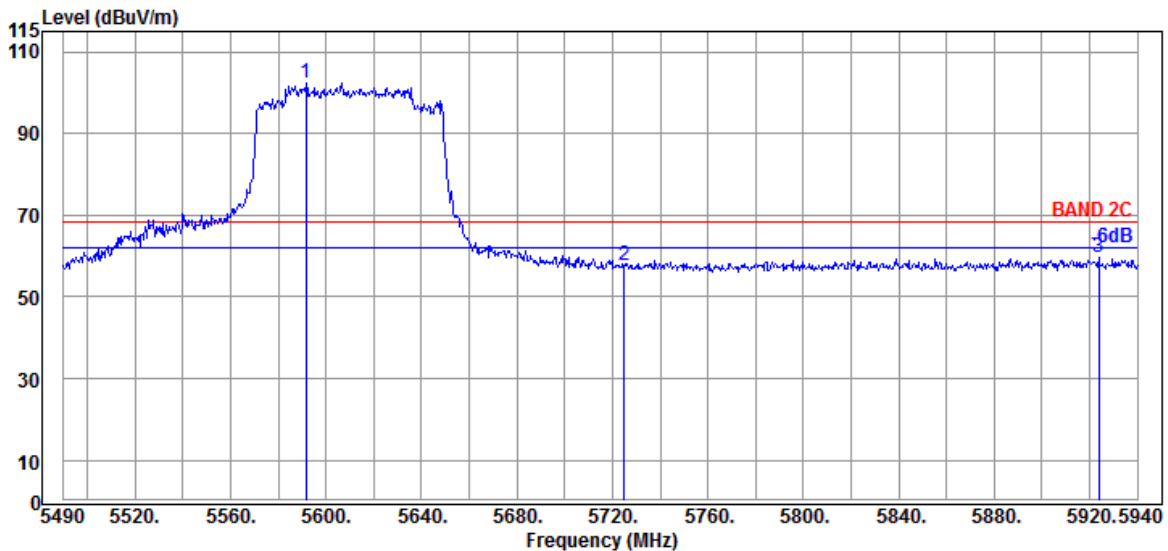

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.700	34.40	9.13	34.24	93.24	102.53	---	---	Peak
5724.900	34.90	9.20	34.30	47.87	57.67	68.20	10.53	Peak
5923.800	35.77	9.29	34.40	48.99	59.65	68.20	8.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Spot Check


- **Test SKU #2 (with INPAQ Antenna and GM main board)**

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

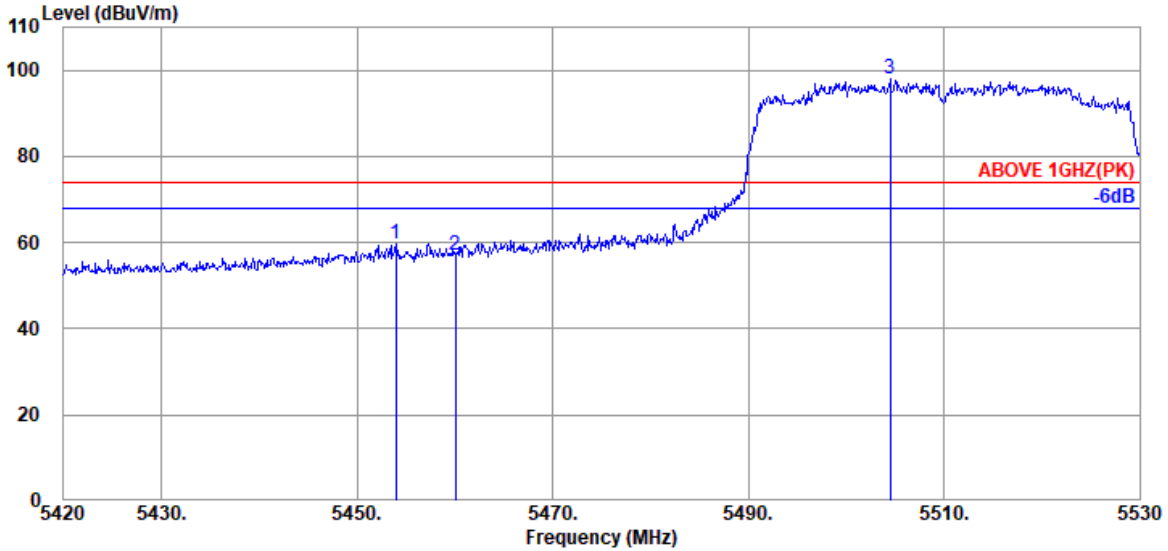

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.990	34.20	9.05	39.26	55.74	59.73	74.00	14.27	Peak
5460.040	34.20	9.05	39.26	52.94	56.93	74.00	17.07	Peak
@ 5504.480	34.10	9.08	39.26	94.24	98.16	---	---	Peak

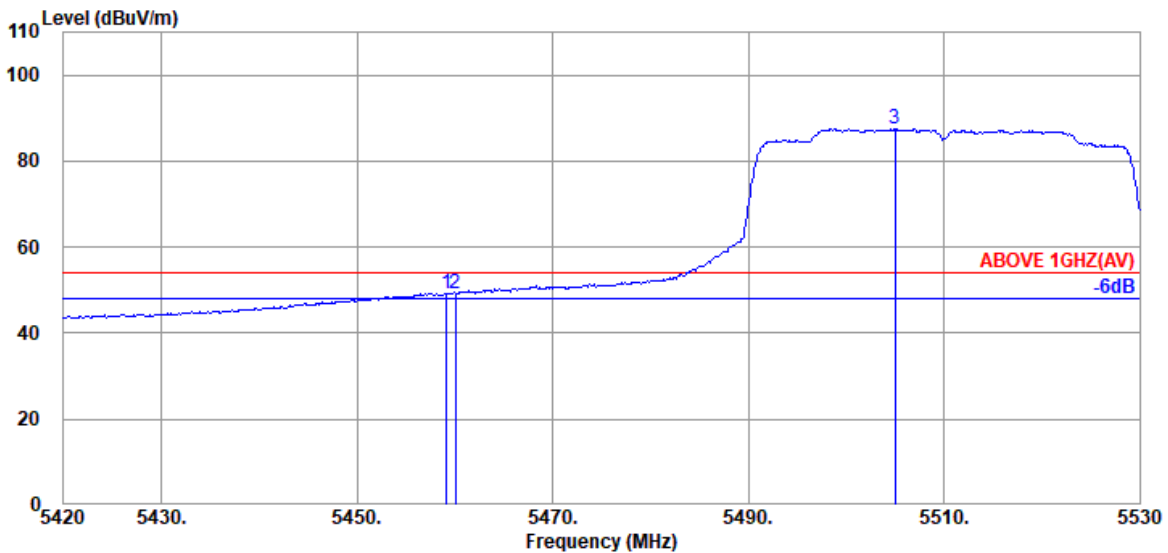


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.160	34.20	9.05	39.26	45.33	49.32	54.00	4.68	Average
5460.040	34.20	9.05	39.26	45.29	49.28	54.00	4.72	Average
@ 5505.030	34.10	9.08	39.26	83.51	87.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

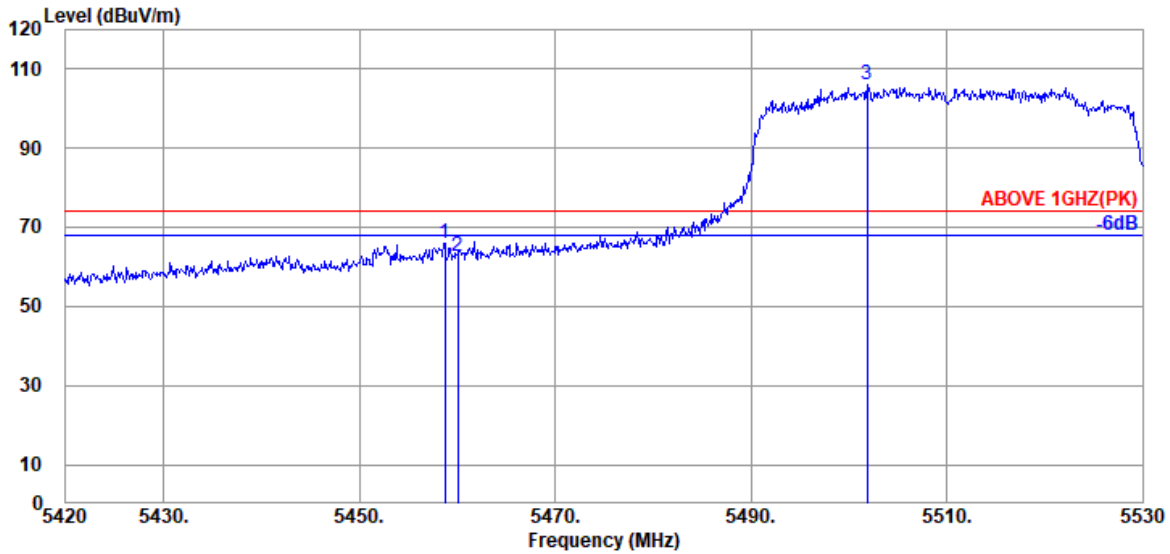

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.20	9.05	39.26	62.09	66.08	74.00	7.92	Peak
5460.040	34.20	9.05	39.26	58.59	62.58	74.00	11.42	Peak
@ 5501.840	34.10	9.08	39.26	102.26	106.18	---	---	Peak

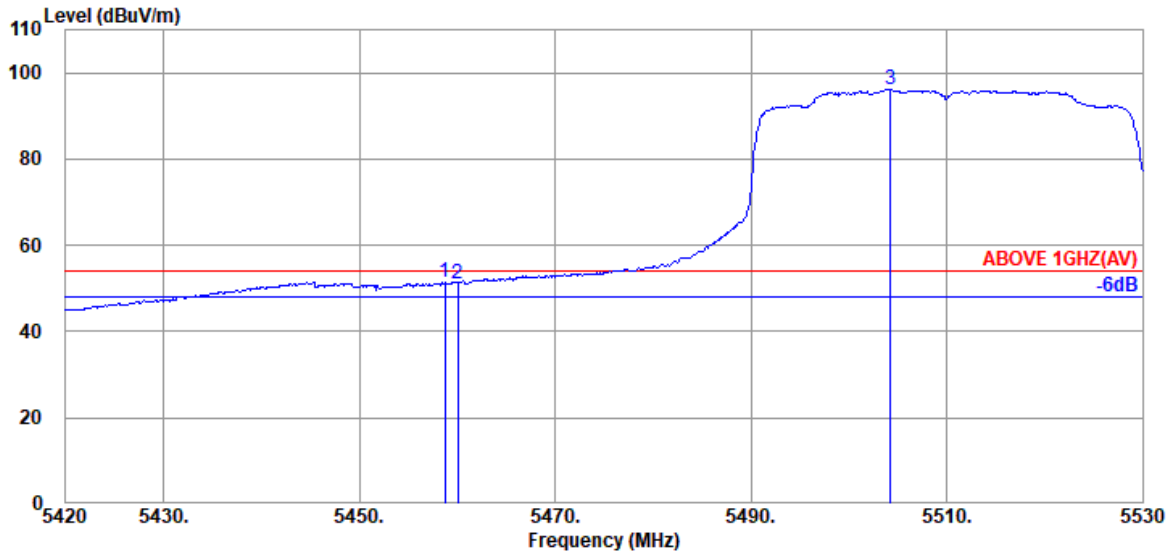


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.20	9.05	39.26	47.49	51.48	54.00	2.52	Average
5460.040	34.20	9.05	39.26	47.13	51.12	54.00	2.88	Average
@ 5504.260	34.10	9.08	39.26	92.30	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

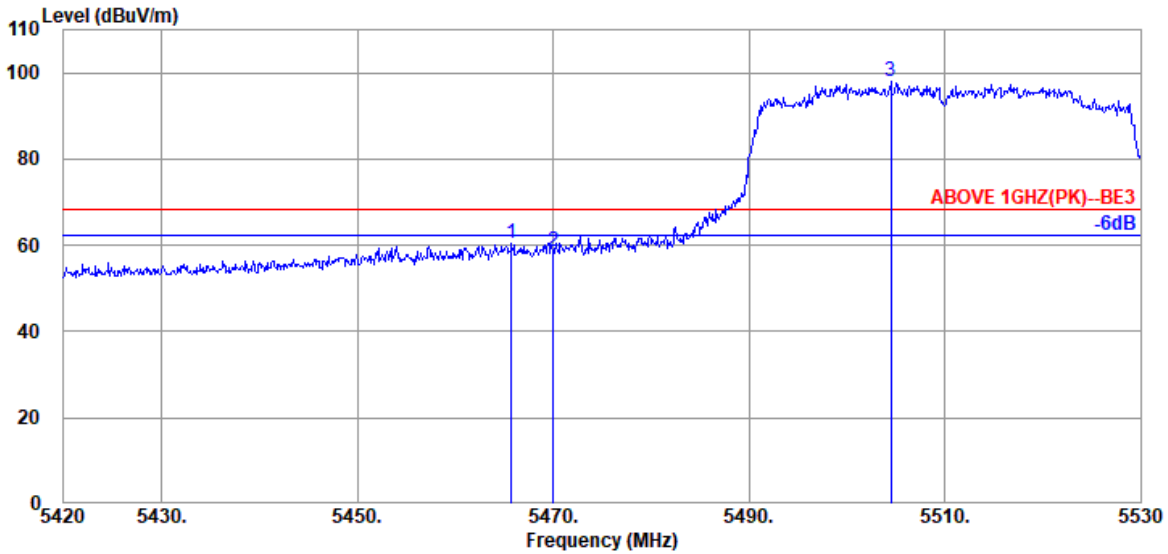

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.760	34.17	9.06	39.26	56.34	60.31	68.20	7.89	Peak
5470.050	34.17	9.06	39.26	54.71	58.68	68.20	9.52	Peak
@ 5504.480	34.10	9.08	39.26	94.24	98.16	---	---	Peak

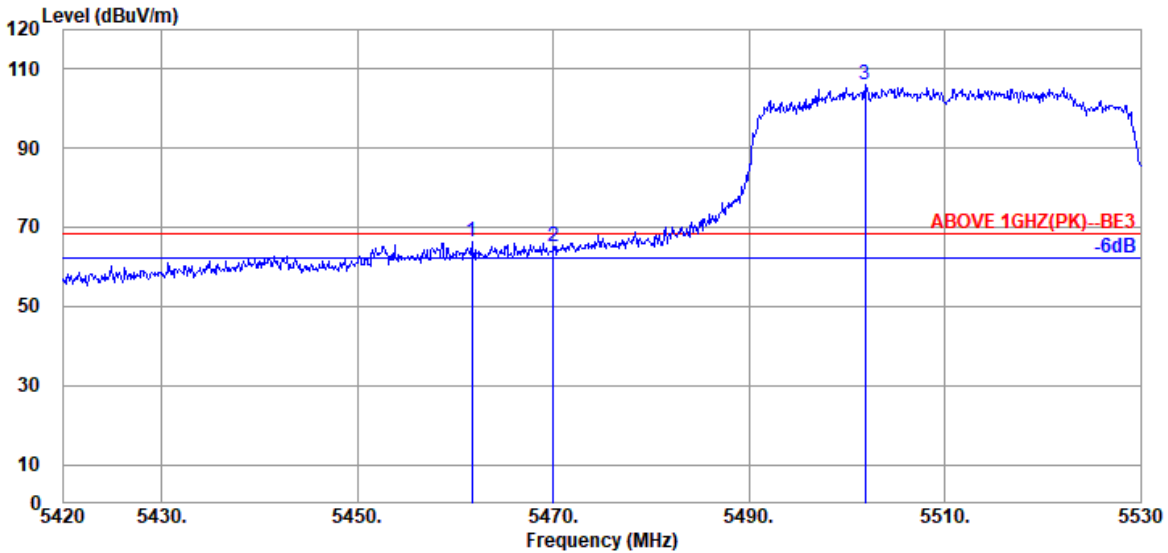

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.690	34.20	9.05	39.26	62.20	66.19	68.20	2.01	Peak
5470.050	34.17	9.06	39.26	61.02	64.99	68.20	3.21	Peak
@ 5501.840	34.10	9.08	39.26	102.26	106.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Spot Check


- **Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)**

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

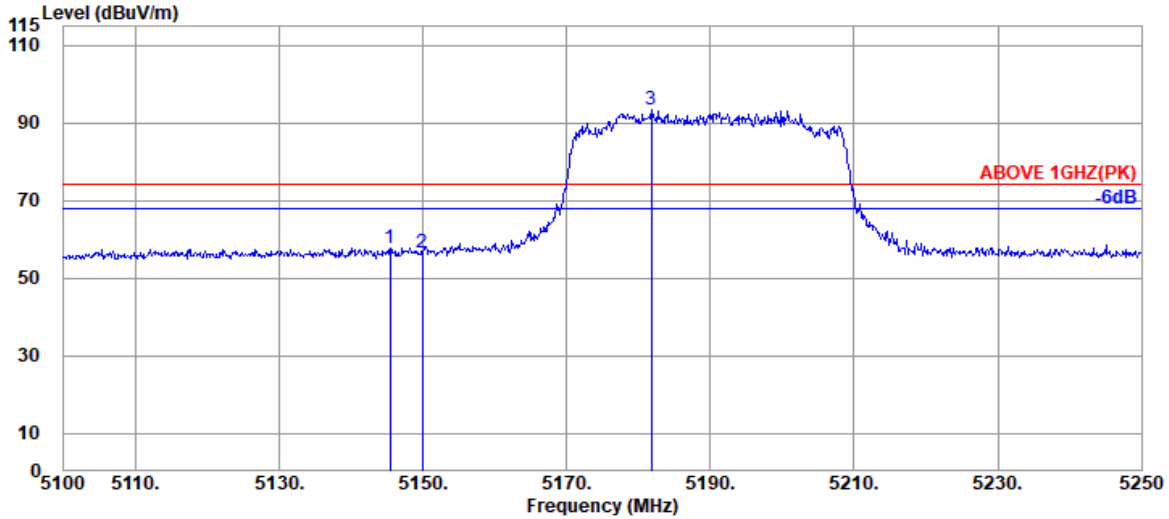

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	34.50	8.88	34.34	48.77	57.81	74.00	16.19	Peak
5149.950	34.50	8.88	34.34	47.47	56.51	74.00	17.49	Peak
@ 5181.750	34.63	8.90	34.32	84.30	93.51	---	---	Peak

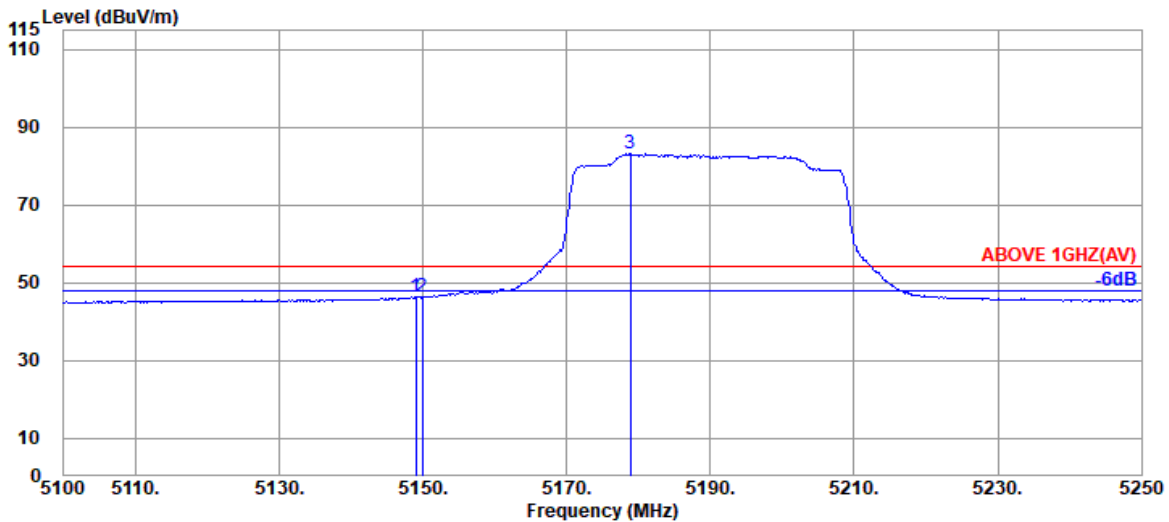


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.50	8.88	34.34	37.33	46.37	54.00	7.63	Average
5149.950	34.50	8.88	34.34	37.35	46.39	54.00	7.61	Average
@ 5178.900	34.63	8.90	34.32	73.92	83.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

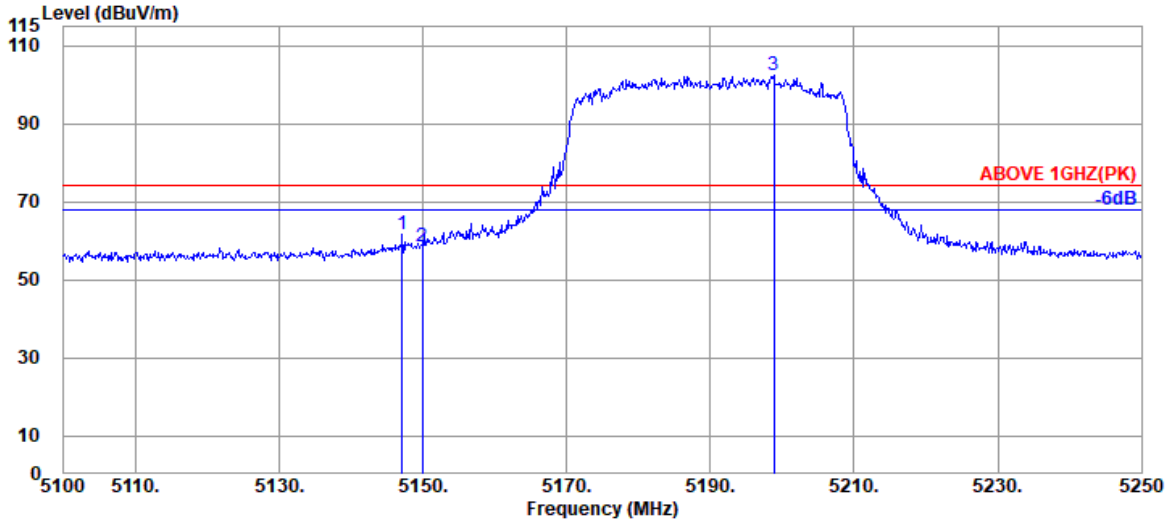

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.50	8.88	34.34	52.63	61.67	74.00	12.33	Peak
5149.950	34.50	8.88	34.34	49.60	58.64	74.00	15.36	Peak
@ 5198.850	34.70	8.91	34.32	93.02	102.31	---	---	Peak

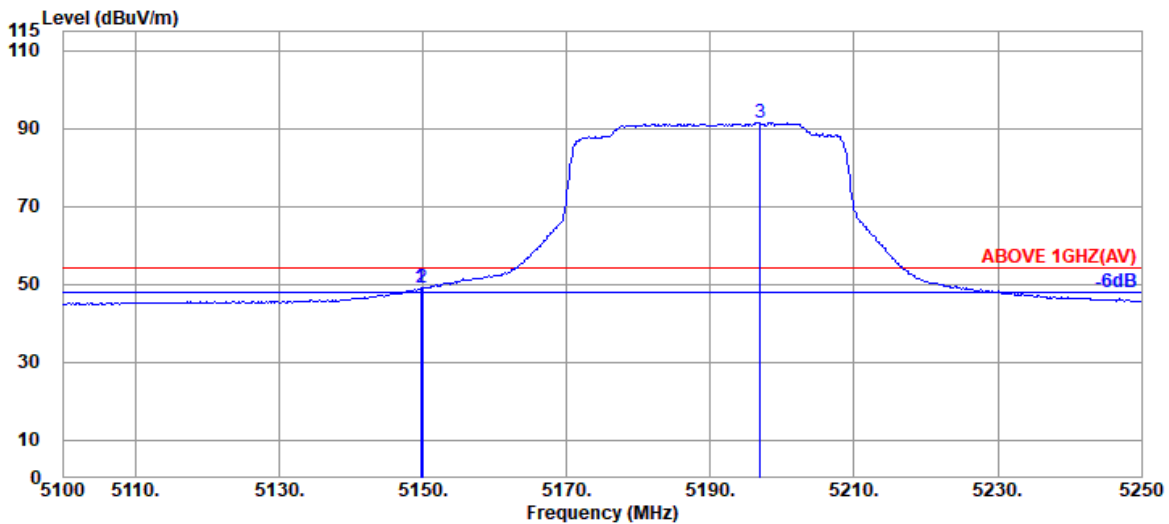

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.50	8.88	34.34	39.88	48.92	54.00	5.08	Average
5149.950	34.50	8.88	34.34	39.86	48.90	54.00	5.10	Average
@ 5196.900	34.70	8.91	34.32	82.11	91.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.