


## TABLE OF CONTENTS

|   |            |
|---|------------|
| <b>A.1 CONDUCTED EMISSION</b> .....   | <b>2</b>   |
| <b>A.2 RADIATED EMISSION</b> .....  | <b>6</b>   |
| A.2.1 Emissions within Restricted Frequency Bands.....                      | 6          |
| A.2.2 Emissions outside the frequency band.....                             | 103        |
| A.2.3 Emissions in Non-restricted Frequency Bands.....                      | 157        |
| <b>A.3 MAXIMUM POWER SPECTRAL DENSITY</b> .....                             | <b>158</b> |
| A.3.1 Power Spectral Density Result .....                                   | 158        |
| A.3.2 Measurement Plots .....   | 160        |
| <b>A.4 MAXIMUM CONDUCTED OUTPUT POWER</b> .....                             | <b>176</b> |
| A.4.1 Conducted Output Power Result .....                                   | 176        |
| A.4.2 Measurement Plots .....   | 202        |
| <b>A.5 EMISSION/OCCUPIED BANDWIDTH</b> .....                                | <b>219</b> |
| A.5.1 Emission/Occupied Bandwidth Result .....                              | 219        |
| A.5.2 Measurement Plots .....   | 220        |
| <b>A.6 UNDESIRABLE EMISSION LIMITS: SPURIOUS EMISSION (CONDUCTED)</b> ..... | <b>234</b> |
| <b>A.7 IN-BAND EMISSION (CHANNEL MASK)</b> .....                            | <b>237</b> |
| <b>A.8 CONTENTION BASED PROTOCOL</b> .....                                  | <b>253</b> |
| A.8.1 Contention-based Protocol.....  | 253        |
| A.8.2 Measurement Plots .....   | 256        |

## A.1 CONDUCTED EMISSION

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2022/11/10                    | Temp./Hum. | 26°C/64% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #1 (with PM main board)   |            |          |

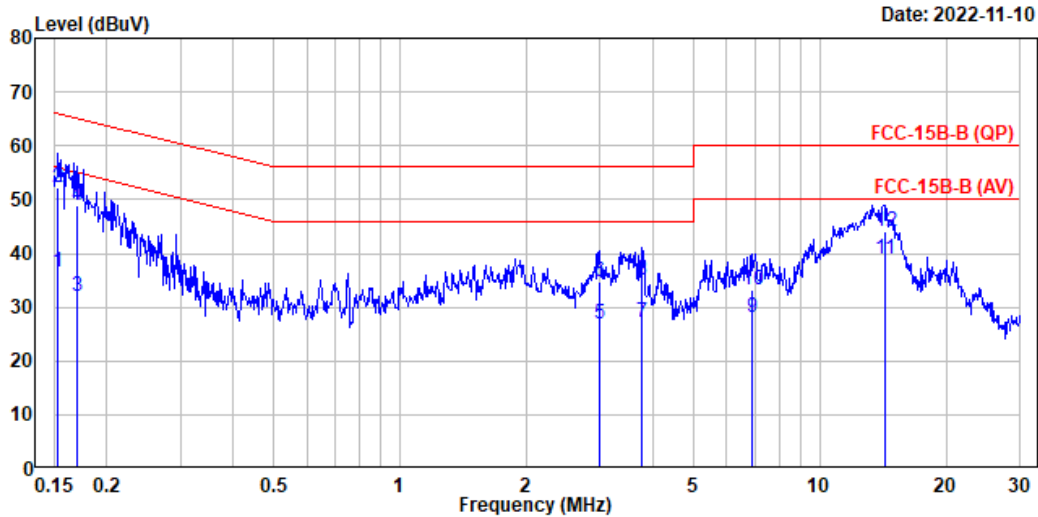

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 2           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : FCC-15B-B (QP)                      | Phase       | : Line        |
| Environment  | : 26°C/64 %                           | Engineer    | : Roy Hung    |
| EUT Model    | : 17Z90R                              | Test Rating | : 120Vac/60Hz |
| Test Mode    | : Operating                           |             |               |


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.153          | 10.22                 | 0.03                  | 9.85                  | 16.41             | 36.51                       | 55.83            | 19.32          | Average |
| 2  | 0.153          | 10.22                 | 0.03                  | 9.85                  | 32.14             | 52.24                       | 65.83            | 13.59          | QP      |
| 3  | 0.171          | 10.22                 | 0.03                  | 9.85                  | 11.75             | 31.85                       | 54.92            | 23.07          | Average |
| 4  | 0.171          | 10.22                 | 0.03                  | 9.85                  | 28.79             | 48.89                       | 64.92            | 16.03          | QP      |
| 5  | 3.000          | 10.27                 | 0.07                  | 9.86                  | 6.77              | 26.97                       | 46.00            | 19.03          | Average |
| 6  | 3.000          | 10.27                 | 0.07                  | 9.86                  | 14.44             | 34.64                       | 56.00            | 21.36          | QP      |
| 7  | 3.754          | 10.28                 | 0.08                  | 9.86                  | 6.80              | 27.02                       | 46.00            | 18.98          | Average |
| 8  | 3.754          | 10.28                 | 0.08                  | 9.86                  | 14.88             | 35.10                       | 56.00            | 20.90          | QP      |
| 9  | 6.895          | 10.36                 | 0.11                  | 9.87                  | 7.68              | 28.02                       | 50.00            | 21.98          | Average |
| 10 | 6.895          | 10.36                 | 0.11                  | 9.87                  | 12.95             | 33.29                       | 60.00            | 26.71          | QP      |
| 11 | 14.275         | 10.53                 | 0.17                  | 9.91                  | 18.26             | 38.87                       | 50.00            | 11.13          | Average |
| 12 | 14.275         | 10.53                 | 0.17                  | 9.91                  | 23.57             | 44.18                       | 60.00            | 15.82          | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2022/11/10                    | Temp./Hum. | 26°C/64% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #1 (with PM main board)   |            |          |

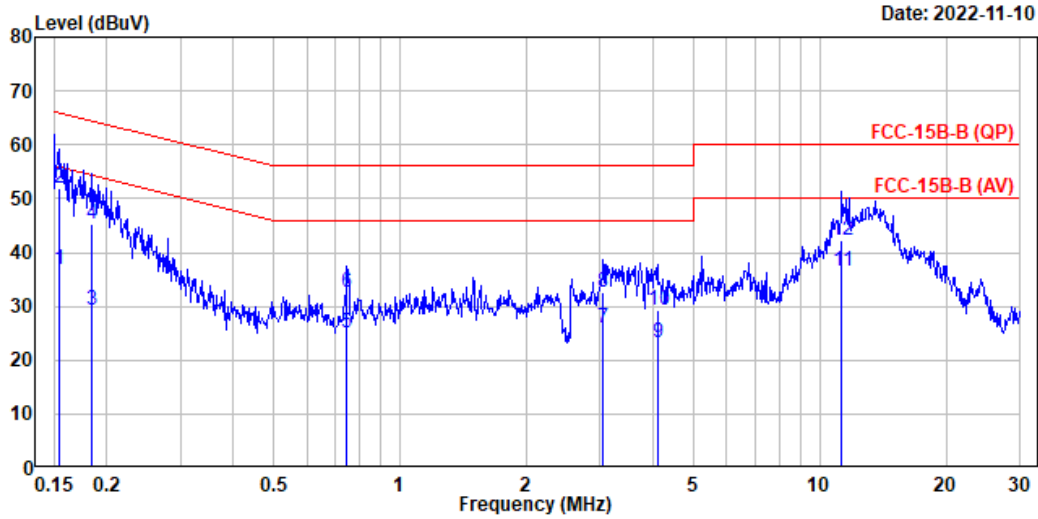

Site No. : No.8 Shielded Room  
 Instrument 1 : Receiver ESR(774)  
 Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : FCC-15B-B (QP)  
 Environment : 26°C/64 %  
 EUT Model : 17290R  
 Test Mode : Operating

Data No. : 1  
 Phase : Neutral  
 Engineer : Roy Hung  
 Test Rating : 120Vac/60Hz


|    | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark  |
|----|-------------|-----------------|-----------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1  | 0.154       | 10.34           | 0.03            | 9.85            | 16.58          | 36.80                 | 55.79         | 18.99       | Average |
| 2  | 0.154       | 10.34           | 0.03            | 9.85            | 31.64          | 51.86                 | 65.79         | 13.93       | QP      |
| 3  | 0.185       | 10.33           | 0.03            | 9.85            | 9.17           | 29.38                 | 54.26         | 24.88       | Average |
| 4  | 0.185       | 10.33           | 0.03            | 9.85            | 25.06          | 45.27                 | 64.26         | 18.99       | QP      |
| 5  | 0.747       | 10.33           | 0.04            | 9.85            | 4.82           | 25.04                 | 46.00         | 20.96       | Average |
| 6  | 0.747       | 10.33           | 0.04            | 9.85            | 12.33          | 32.55                 | 56.00         | 23.45       | QP      |
| 7  | 3.045       | 10.38           | 0.07            | 9.86            | 5.57           | 25.88                 | 46.00         | 20.12       | Average |
| 8  | 3.045       | 10.38           | 0.07            | 9.86            | 12.29          | 32.60                 | 56.00         | 23.40       | QP      |
| 9  | 4.106       | 10.41           | 0.08            | 9.86            | 2.76           | 23.11                 | 46.00         | 22.89       | Average |
| 10 | 4.106       | 10.41           | 0.08            | 9.86            | 8.85           | 29.20                 | 56.00         | 26.80       | QP      |
| 11 | 11.294      | 10.70           | 0.15            | 9.90            | 15.75          | 36.50                 | 50.00         | 13.50       | Average |
| 12 | 11.294      | 10.70           | 0.15            | 9.90            | 21.41          | 42.16                 | 60.00         | 17.84       | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2022/11/10                    | Temp./Hum. | 26°C/64% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #2 (with GM main board)   |            |          |

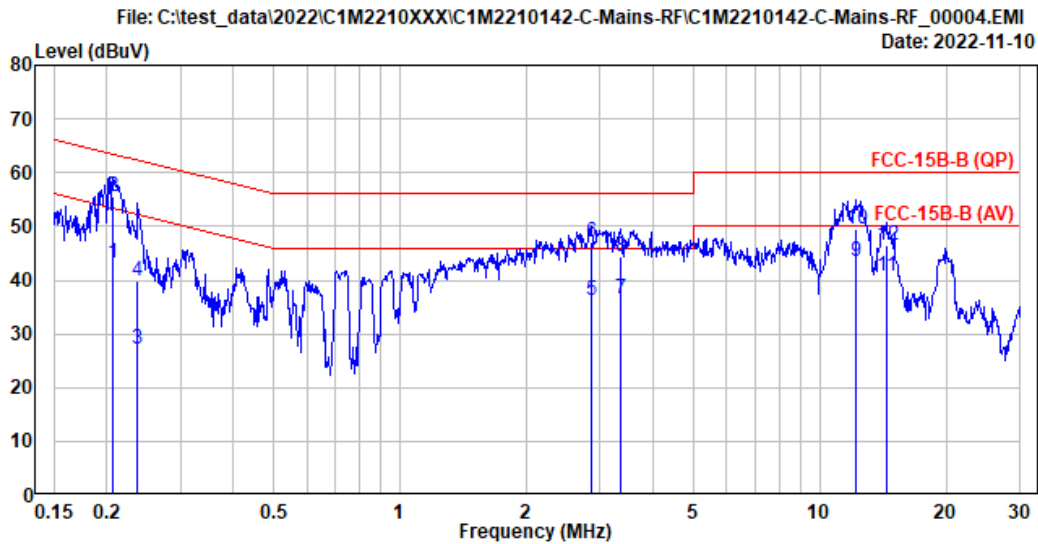

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 4           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : FCC-15B-B (QP)                      | Phase       | : Neutral     |
| Environment  | : 26°C/64 %                           | Engineer    | : Roy Hung    |
| EUT Model    | : 17290R                              | Test Rating | : 120Vac/60Hz |
| Test Mode    | : Operating                           |             |               |


|    | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark  |
|----|-------------|-----------------|-----------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1  | 0.206       | 10.32           | 0.03            | 9.85            | 22.96          | 43.16                 | 53.35         | 10.19       | Average |
| 2  | 0.206       | 10.32           | 0.03            | 9.85            | 35.36          | 55.56                 | 63.35         | 7.79        | QP      |
| 3  | 0.237       | 10.32           | 0.03            | 9.85            | 7.03           | 27.23                 | 52.19         | 24.96       | Average |
| 4  | 0.237       | 10.32           | 0.03            | 9.85            | 19.57          | 39.77                 | 62.19         | 22.42       | QP      |
| 5  | 2.854       | 10.38           | 0.07            | 9.86            | 16.02          | 36.33                 | 46.00         | 9.67        | Average |
| 6  | 2.854       | 10.38           | 0.07            | 9.86            | 26.87          | 47.18                 | 56.00         | 8.82        | QP      |
| 7  | 3.347       | 10.39           | 0.07            | 9.86            | 16.28          | 36.60                 | 46.00         | 9.40        | Average |
| 8  | 3.347       | 10.39           | 0.07            | 9.86            | 23.92          | 44.24                 | 56.00         | 11.76       | QP      |
| 9  | 12.232      | 10.75           | 0.15            | 9.90            | 22.64          | 43.44                 | 50.00         | 6.56        | Average |
| 10 | 12.232      | 10.75           | 0.15            | 9.90            | 28.65          | 49.45                 | 60.00         | 10.55       | QP      |
| 11 | 14.418      | 10.85           | 0.17            | 9.91            | 19.92          | 40.85                 | 50.00         | 9.15        | Average |
| 12 | 14.418      | 10.85           | 0.17            | 9.91            | 25.57          | 46.50                 | 60.00         | 13.50       | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2022/11/10                    | Temp./Hum. | 26°C/64% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #2 (with GM main board)   |            |          |

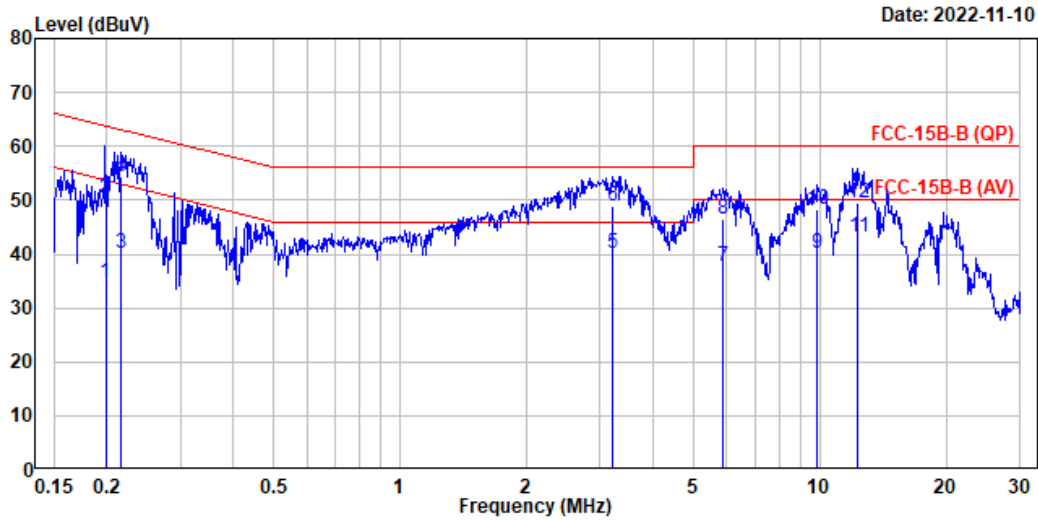

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 3           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : FCC-15B-B (QP)                      | Phase       | : Line        |
| Environment  | : 26°C/64 %                           | Engineer    | : Roy Hung    |
| EUT Model    | : 17290R                              | Test Rating | : 120Vac/60Hz |
| Test Mode    | : Operating                           |             |               |

|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBµV) | Emission<br>Level<br>(dBµV) | Limits<br>(dBµV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.199          | 10.22                 | 0.03                  | 9.85                  | 14.76             | 34.86                       | 53.66            | 18.80          | Average |
| 2  | 0.199          | 10.22                 | 0.03                  | 9.85                  | 30.19             | 50.29                       | 63.66            | 13.37          | QP      |
| 3  | 0.216          | 10.22                 | 0.03                  | 9.85                  | 20.05             | 40.15                       | 52.98            | 12.83          | Average |
| 4  | 0.216          | 10.22                 | 0.03                  | 9.85                  | 34.34             | 54.44                       | 62.98            | 8.54           | QP      |
| 5  | 3.216          | 10.27                 | 0.07                  | 9.86                  | 19.92             | 40.12                       | 46.00            | 5.88           | Average |
| 6  | 3.216          | 10.27                 | 0.07                  | 9.86                  | 28.57             | 48.77                       | 56.00            | 7.23           | QP      |
| 7  | 5.879          | 10.34                 | 0.10                  | 9.87                  | 17.47             | 37.78                       | 50.00            | 12.22          | Average |
| 8  | 5.879          | 10.34                 | 0.10                  | 9.87                  | 26.22             | 46.53                       | 60.00            | 13.47          | QP      |
| 9  | 9.872          | 10.42                 | 0.14                  | 9.89                  | 19.78             | 40.23                       | 50.00            | 9.77           | Average |
| 10 | 9.872          | 10.42                 | 0.14                  | 9.89                  | 27.94             | 48.39                       | 60.00            | 11.61          | QP      |
| 11 | 12.354         | 10.49                 | 0.15                  | 9.90                  | 22.76             | 43.30                       | 50.00            | 6.70           | Average |
| 12 | 12.354         | 10.49                 | 0.15                  | 9.90                  | 28.83             | 49.37                       | 60.00            | 10.63          | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## A.2 RADIATED EMISSION

|              |                               |            |                |
|--------------|-------------------------------|------------|----------------|
| Test Date    | 2022/10/20~12/11              | Temp./Hum. | 22~24°C/51~61% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Martin Chen    |

### A.2.1 Emissions within Restricted Frequency Bands


#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

A.2.1.2 Frequency Below 1GHz

● Test SKU #1 (with PM main board)

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

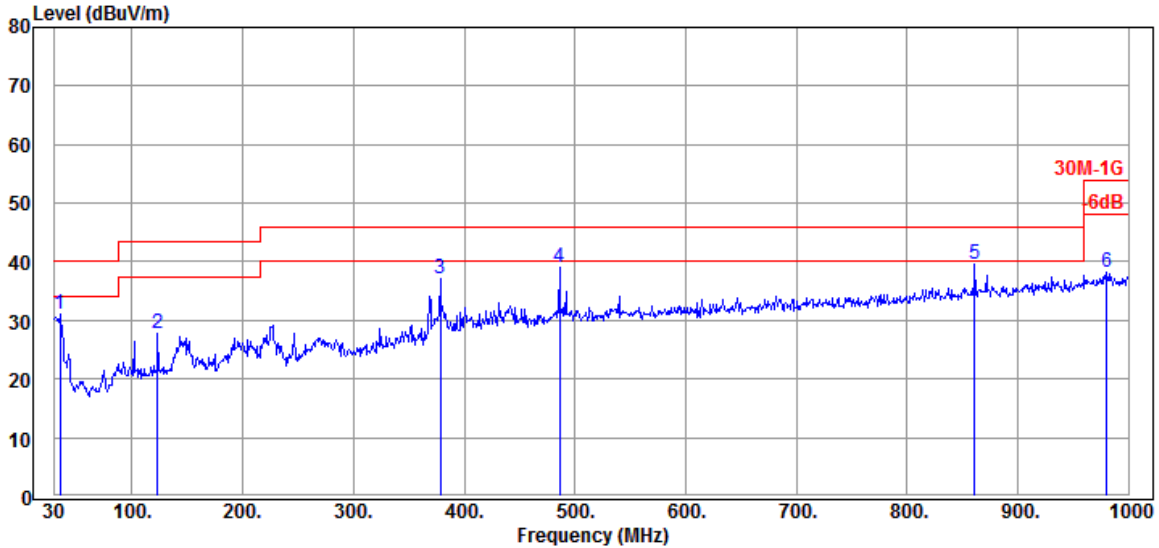


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 34.850                   | 22.32                 | 1.53            | 26.48                  | 33.71             | 31.08                   | 40.00           | 8.92        | Peak     |
| 123.120                  | 17.93                 | 2.89            | 26.14                  | 33.14             | 27.82                   | 43.50           | 15.68       | Peak     |
| 378.230                  | 21.18                 | 5.69            | 26.28                  | 36.45             | 37.04                   | 46.00           | 8.96        | Peak     |
| 485.900                  | 23.24                 | 6.65            | 27.04                  | 36.19             | 39.04                   | 46.00           | 6.96        | Peak     |
| 861.290                  | 25.74                 | 8.55            | 27.08                  | 32.35             | 39.56                   | 46.00           | 6.44        | Peak     |
| 980.600                  | 26.89                 | 9.18            | 26.72                  | 28.90             | 38.25                   | 54.00           | 15.75       | Peak     |

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

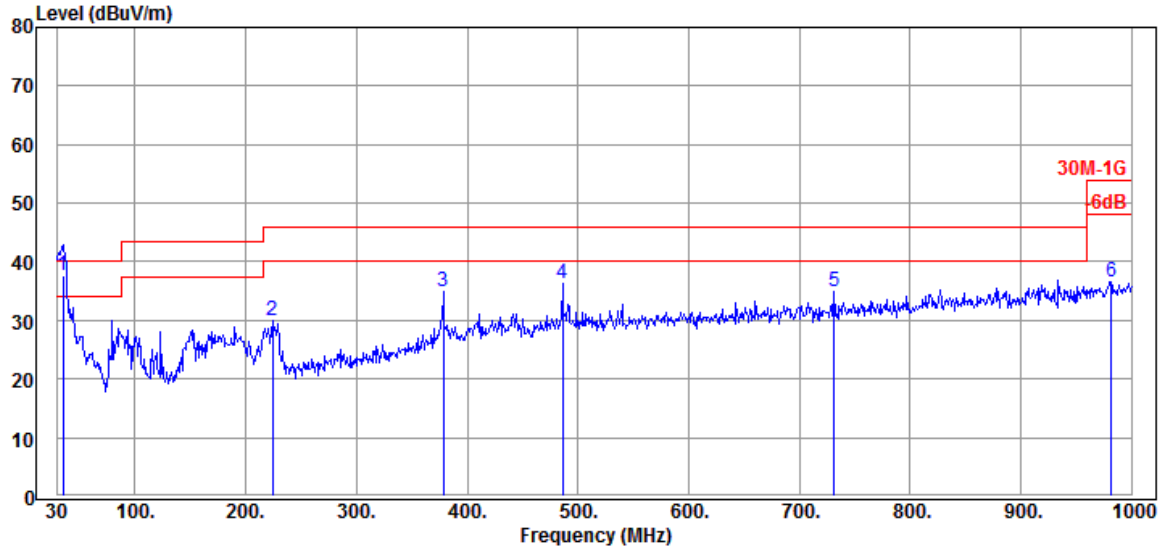


**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 34.850                   | 22.32                 | 1.53            | 0.00             | 13.80             | 37.65                   | 40.00           | 2.35        | QP       |
| 224.000                  | 16.92                 | 3.98            | 25.74            | 34.77             | 29.93                   | 46.00           | 16.07       | Peak     |
| 378.230                  | 21.18                 | 5.69            | 26.28            | 34.37             | 34.96                   | 46.00           | 11.04       | Peak     |
| 485.900                  | 23.24                 | 6.65            | 27.04            | 33.48             | 36.33                   | 46.00           | 9.67        | Peak     |
| 731.310                  | 24.92                 | 7.82            | 27.38            | 29.53             | 34.89                   | 46.00           | 11.11       | Peak     |
| 981.570                  | 26.93                 | 9.20            | 26.72            | 27.18             | 36.59                   | 54.00           | 17.41       | Peak     |



● Test SKU #2 (with GM main board)


|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

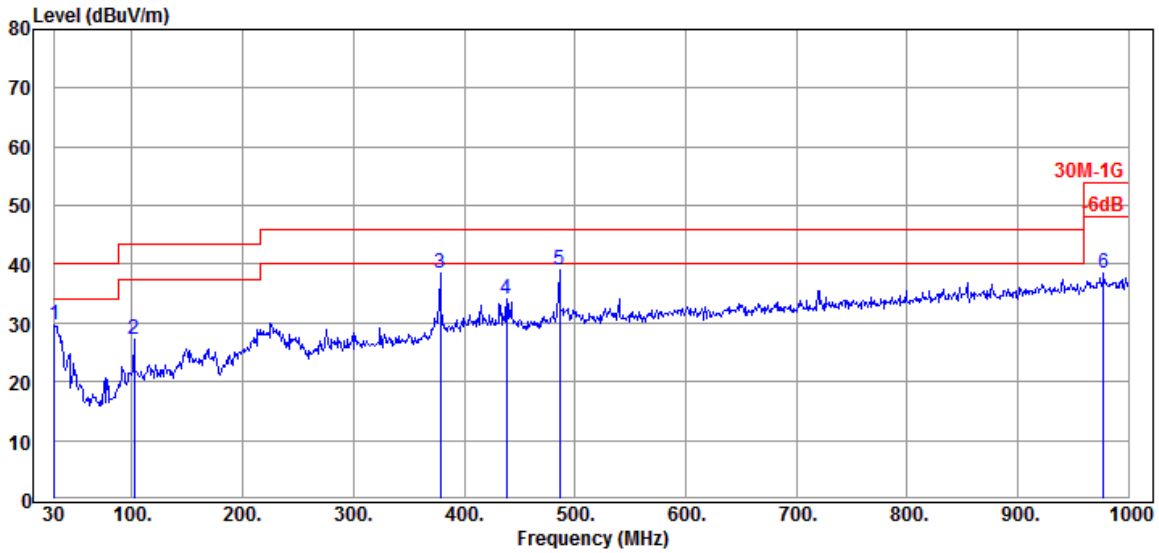

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 30.000                   | 23.27                 | 1.41            | 26.49                  | 31.43             | 29.62                   | 40.00           | 10.38       | Peak     |
| 101.780                  | 16.95                 | 2.63            | 26.28                  | 34.03             | 27.33                   | 43.50           | 16.17       | Peak     |
| 378.230                  | 21.18                 | 5.69            | 26.28                  | 37.78             | 38.37                   | 46.00           | 7.63        | Peak     |
| 438.370                  | 22.39                 | 6.27            | 26.71                  | 32.19             | 34.14                   | 46.00           | 11.86       | Peak     |
| 485.900                  | 23.24                 | 6.65            | 27.04                  | 36.11             | 38.96                   | 46.00           | 7.04        | Peak     |
| 977.690                  | 26.89                 | 9.18            | 26.72                  | 29.05             | 38.40                   | 54.00           | 15.60       | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

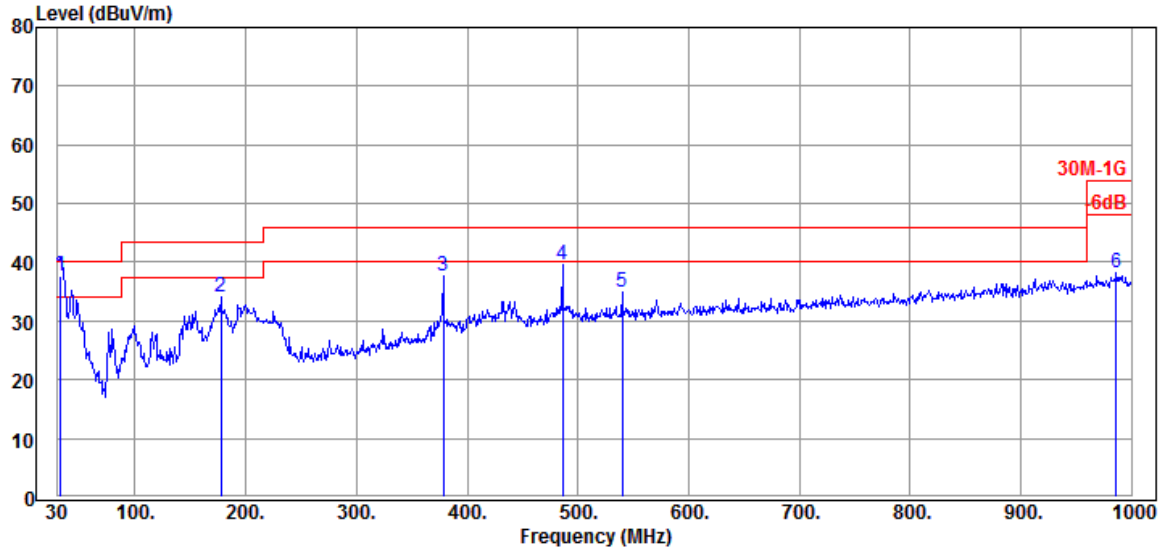


**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 32.910                   | 22.70                 | 1.48            | 0.00             | 13.60             | 37.78                   | 40.00           | 2.22        | QP       |
| 177.440                  | 15.62                 | 3.49            | 25.87            | 40.97             | 34.21                   | 43.50           | 9.29        | Peak     |
| 378.230                  | 21.18                 | 5.69            | 26.28            | 37.14             | 37.73                   | 46.00           | 8.27        | Peak     |
| 485.900                  | 23.24                 | 6.65            | 27.04            | 36.73             | 39.58                   | 46.00           | 6.42        | Peak     |
| 540.220                  | 23.86                 | 6.90            | 27.24            | 31.53             | 35.05                   | 46.00           | 10.95       | Peak     |
| 986.420                  | 26.96                 | 9.22            | 26.69            | 28.59             | 38.08                   | 54.00           | 15.92       | Peak     |

A.2.1.3 Band Edge


- Test SKU #1 (with INPAQ Antenna and PM main board)
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

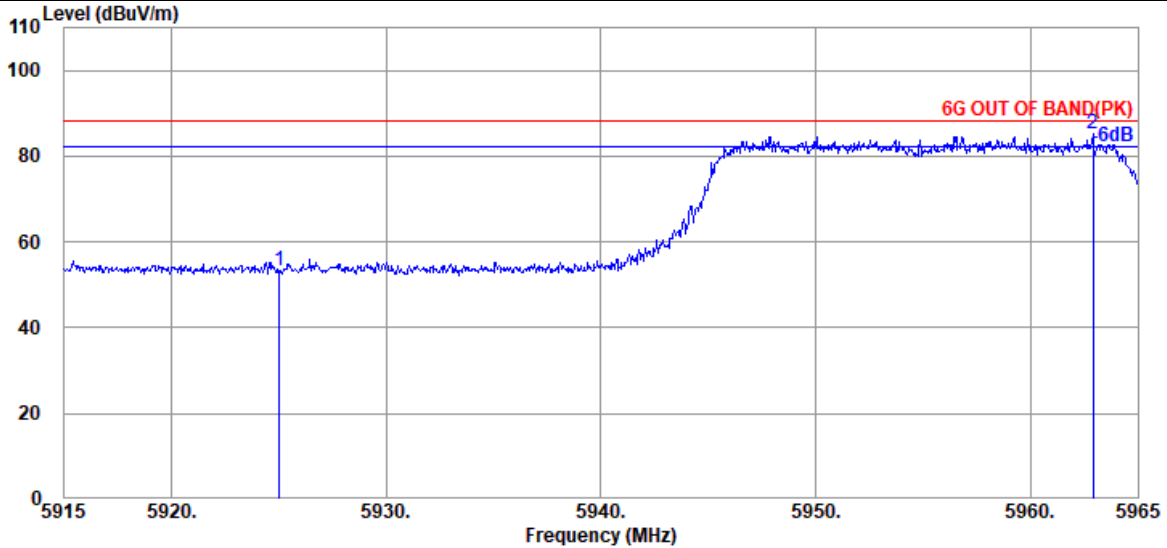

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 49.11             | 53.29                   | 88.20           | 34.91       | Peak     |
| @ 5962.900               | 34.27                 | 9.31            | 39.35                  | 80.88             | 85.11                   | ---             | ---         | Peak     |

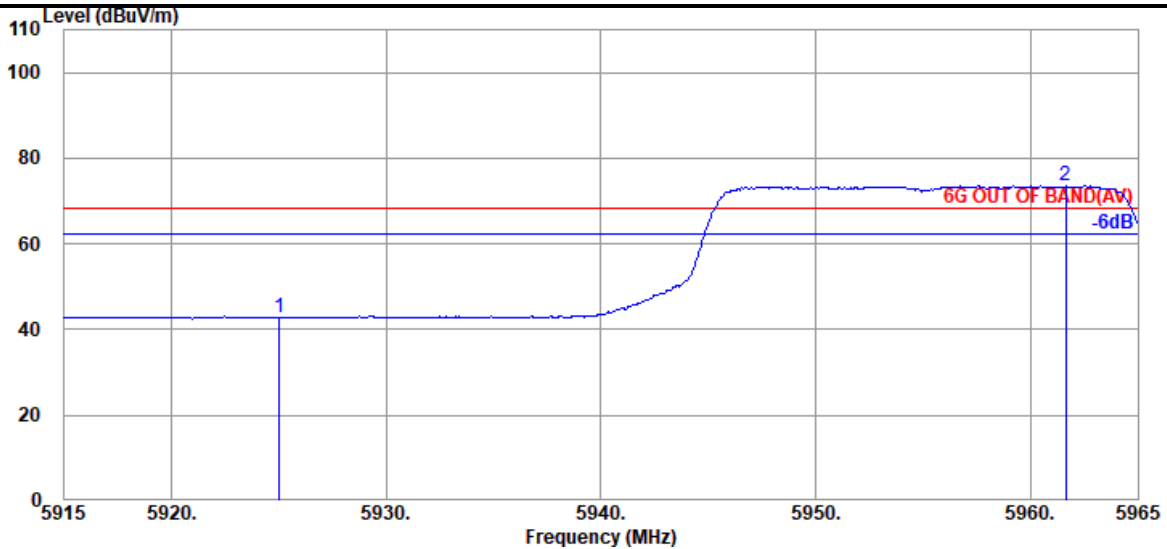


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 38.70             | 42.88                   | 68.20           | 25.32       | Average  |
| @ 5961.650               | 34.27                 | 9.31            | 39.35                  | 69.37             | 73.60                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

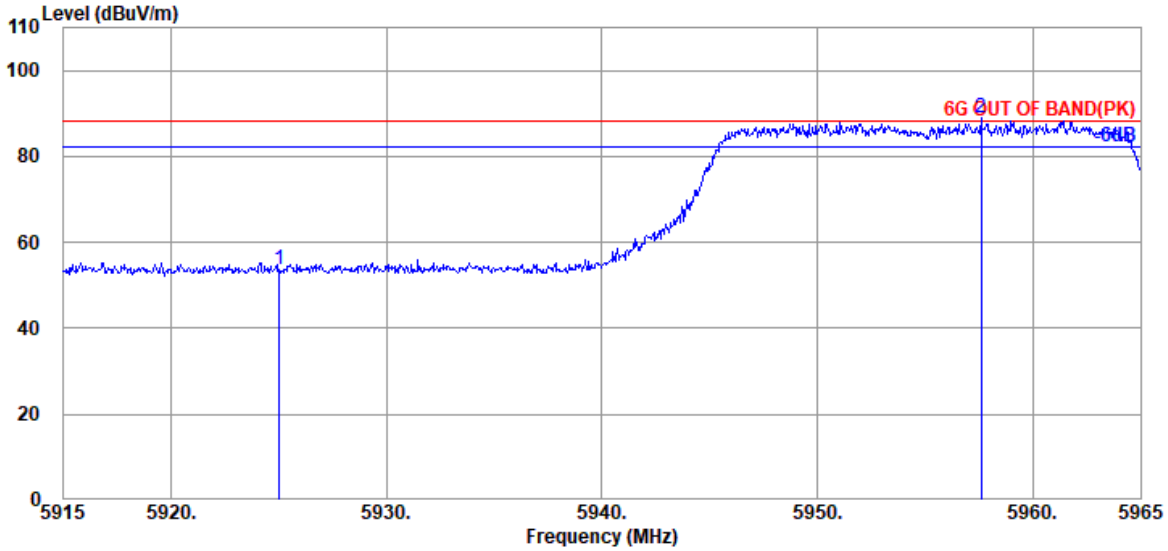

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.49             | 53.67                   | 88.20           | 34.53       | Peak     |
| @ 5957.600               | 34.30                 | 9.30            | 39.35            | 84.72             | 88.97                   | ---             | ---         | Peak     |

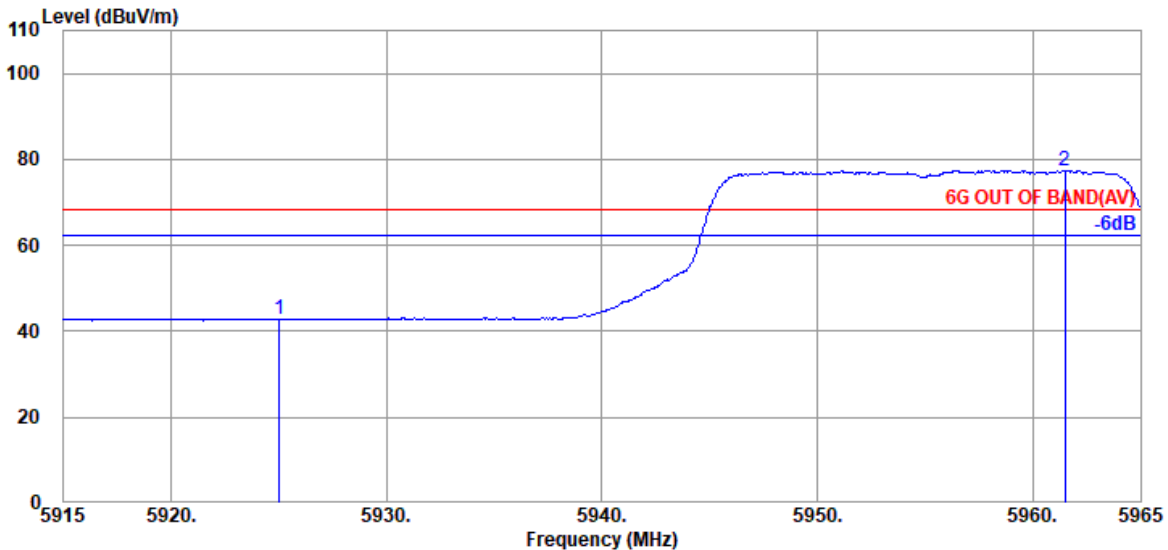


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.58             | 42.76                   | 68.20           | 25.44       | Average  |
| @ 5961.500               | 34.27                 | 9.31            | 39.35            | 73.27             | 77.50                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

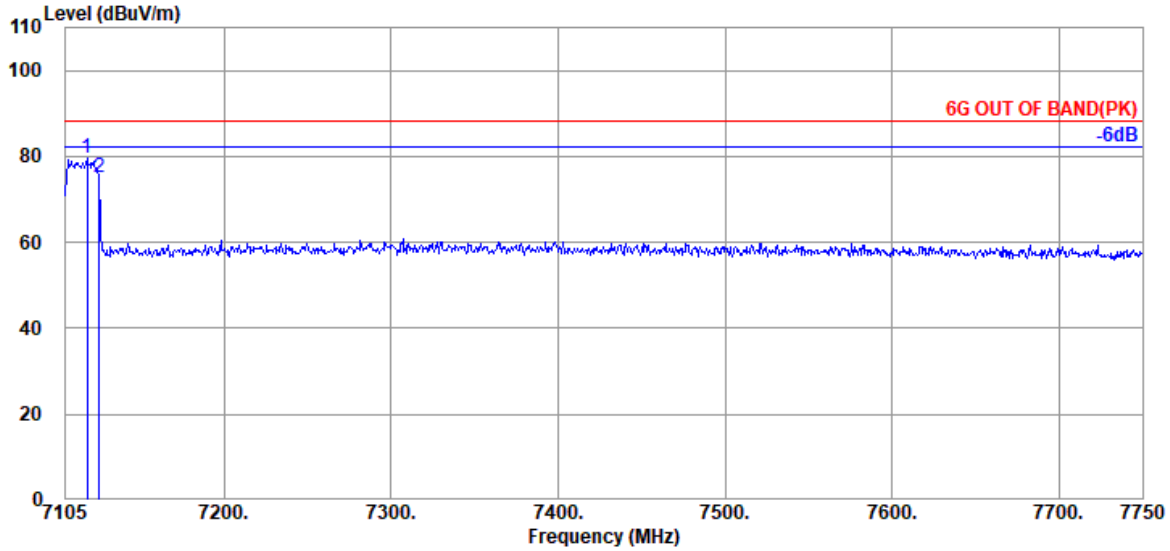

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7117.900               | 35.87                 | 9.82            | 39.50            | 73.32             | 79.51                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 68.76             | 74.95                   | 88.20           | 13.25       | Peak     |

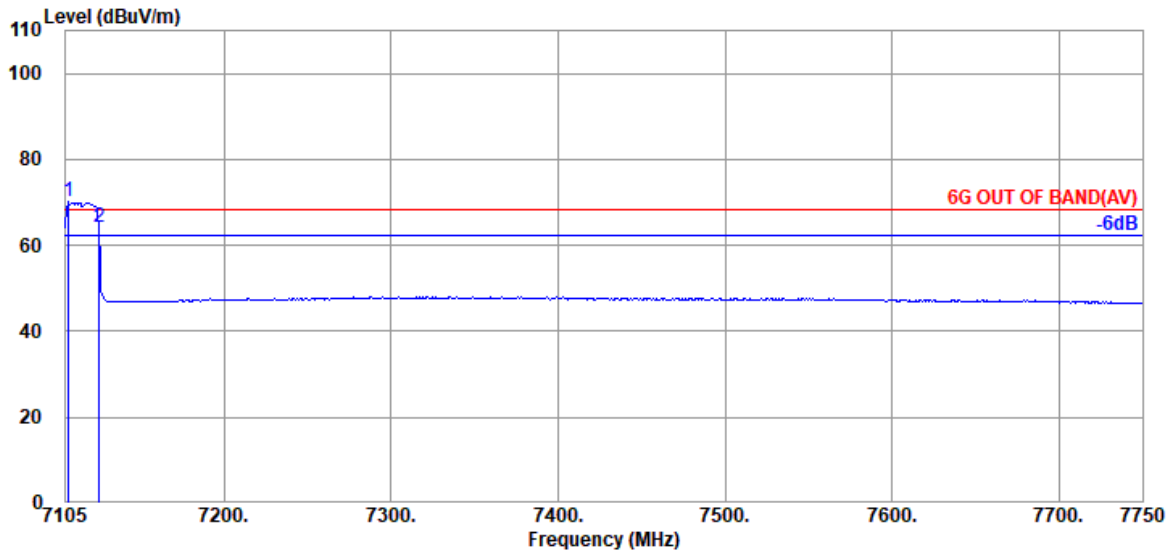


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7106.935               | 35.80                 | 9.80            | 39.49            | 63.94             | 70.05                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 57.93             | 64.12                   | 68.20           | 4.08        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

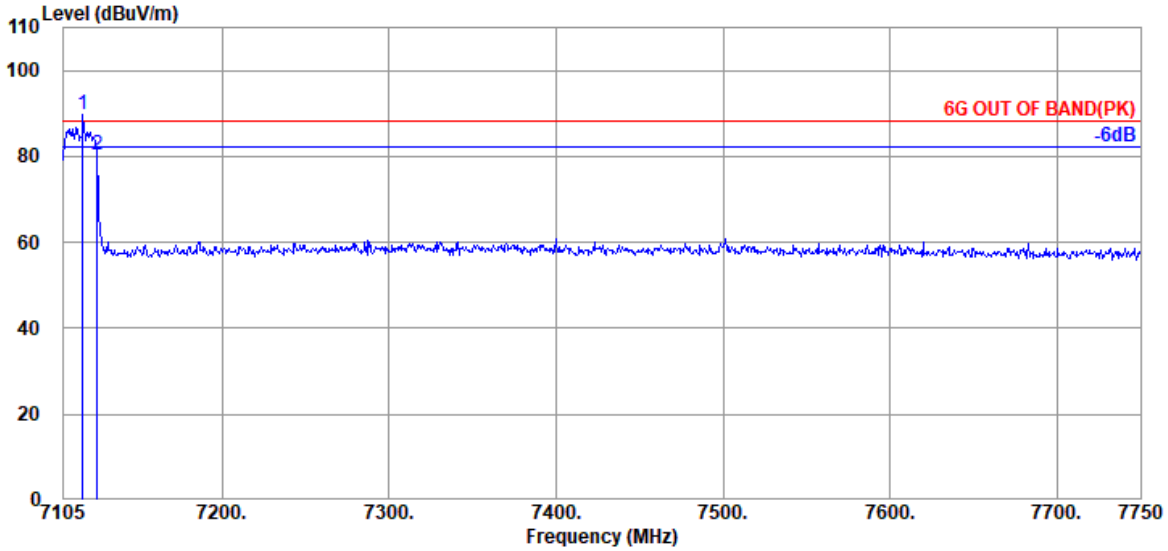

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7116.610               | 35.87                 | 9.82            | 39.50                  | 83.55             | 89.74                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 73.97             | 80.16                   | 88.20           | 8.04        | Peak     |

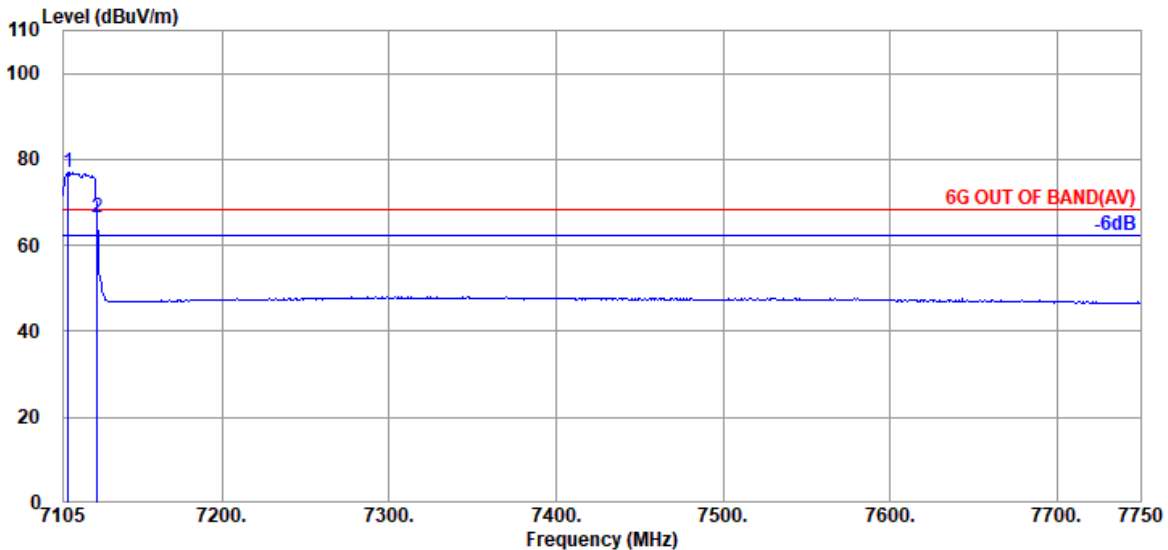


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7107.580               | 35.87                 | 9.82            | 39.49                  | 70.73             | 76.93                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 60.18             | 66.37                   | 68.20           | 1.83        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

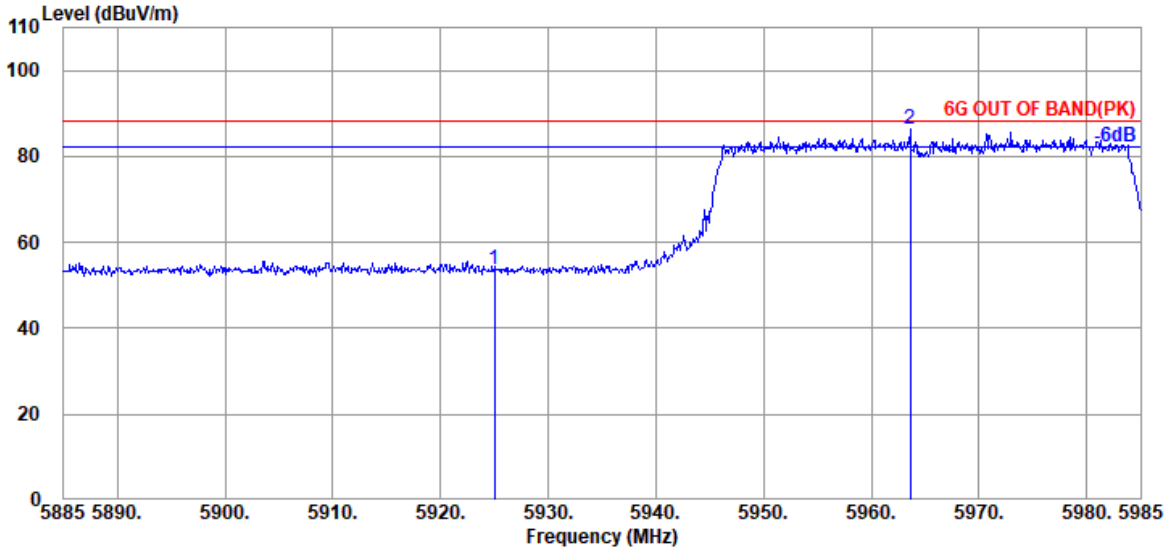

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.50             | 53.68                   | 88.20           | 34.52       | Peak     |
| @ 5963.600               | 34.27                 | 9.31            | 39.35            | 82.02             | 86.25                   | ---             | ---         | Peak     |

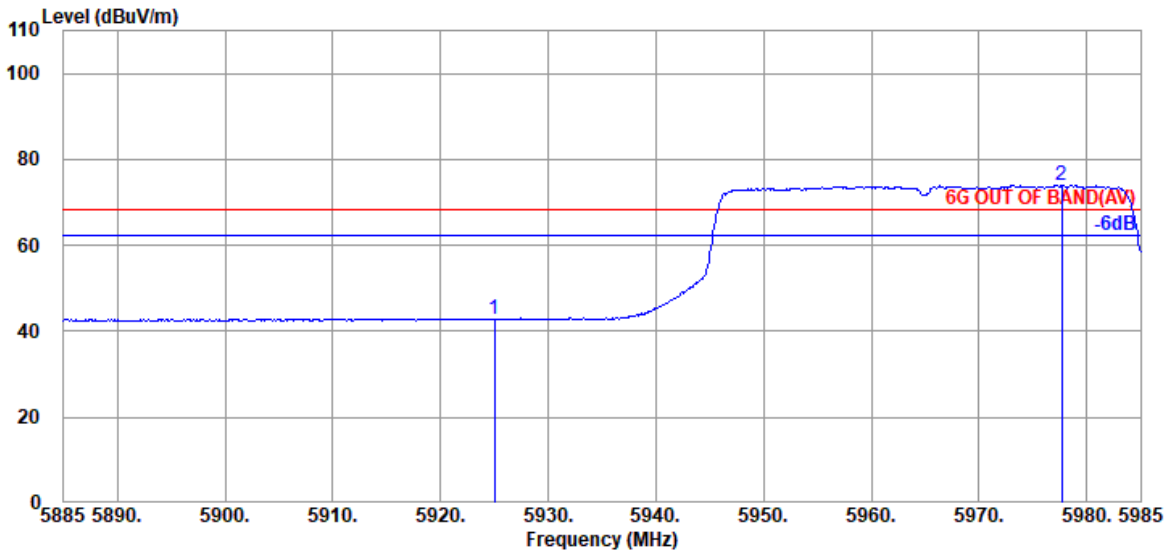


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.62             | 42.80                   | 68.20           | 25.40       | Average  |
| @ 5977.700               | 34.23                 | 9.32            | 39.36            | 69.86             | 74.05                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

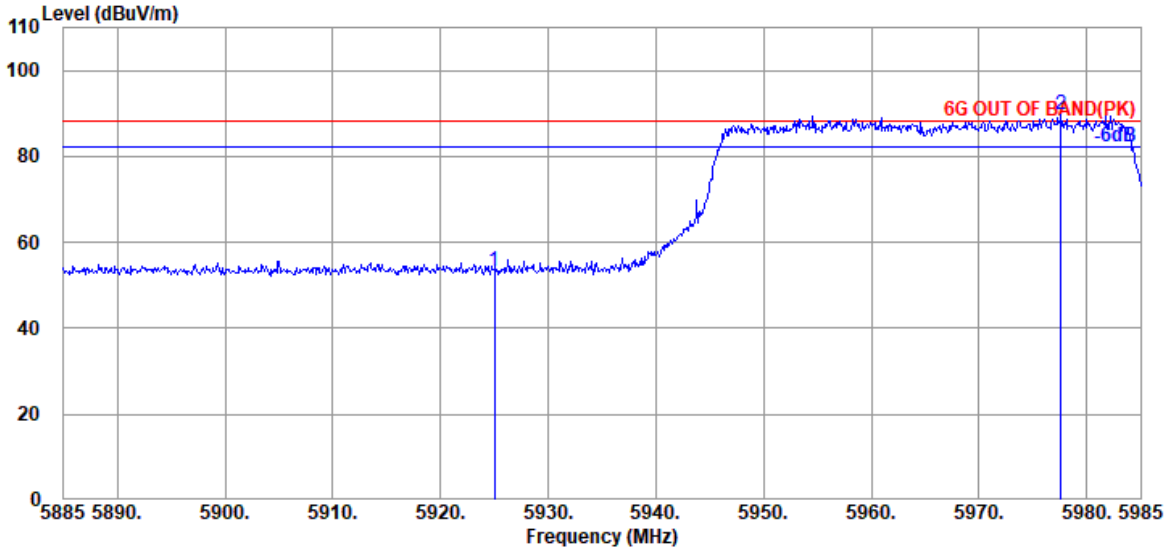

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.26             | 53.44                   | 88.20           | 34.76       | Peak     |
| @ 5977.600               | 34.23                 | 9.32            | 39.36            | 85.67             | 89.86                   | ---             | ---         | Peak     |

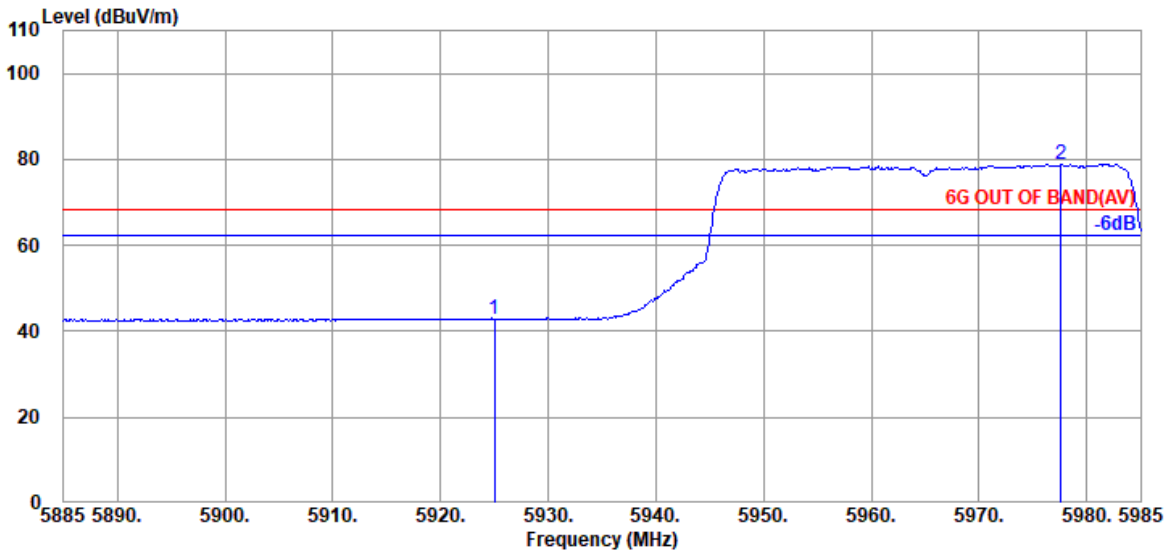


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.60             | 42.78                   | 68.20           | 25.42       | Average  |
| @ 5977.600               | 34.23                 | 9.32            | 39.36            | 74.78             | 78.97                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

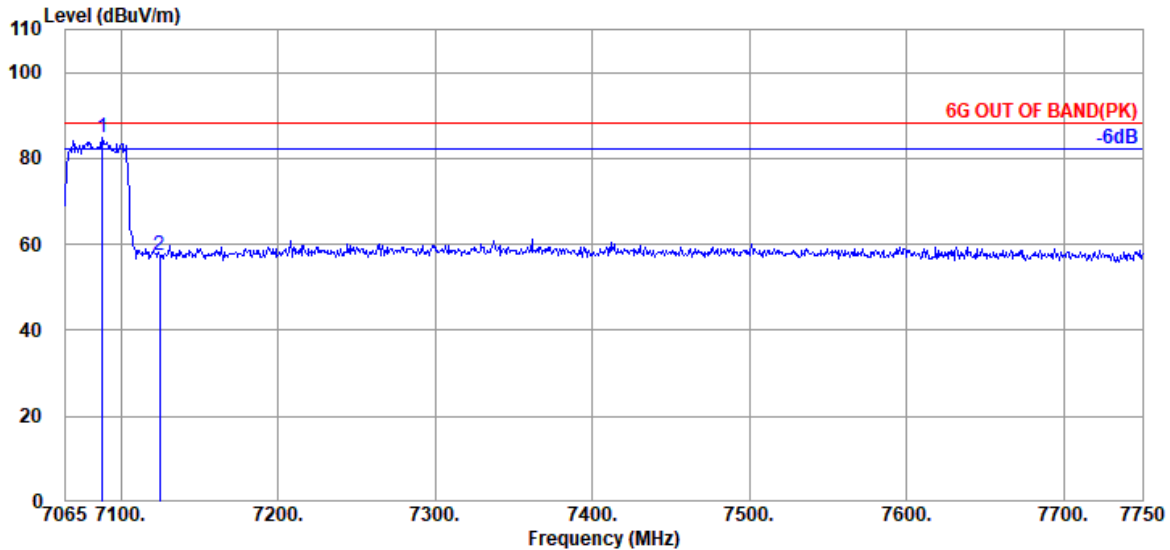

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7088.290               | 35.80                 | 9.80            | 39.49                  | 78.72             | 84.83                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 51.26             | 57.45                   | 88.20           | 30.75       | Peak     |

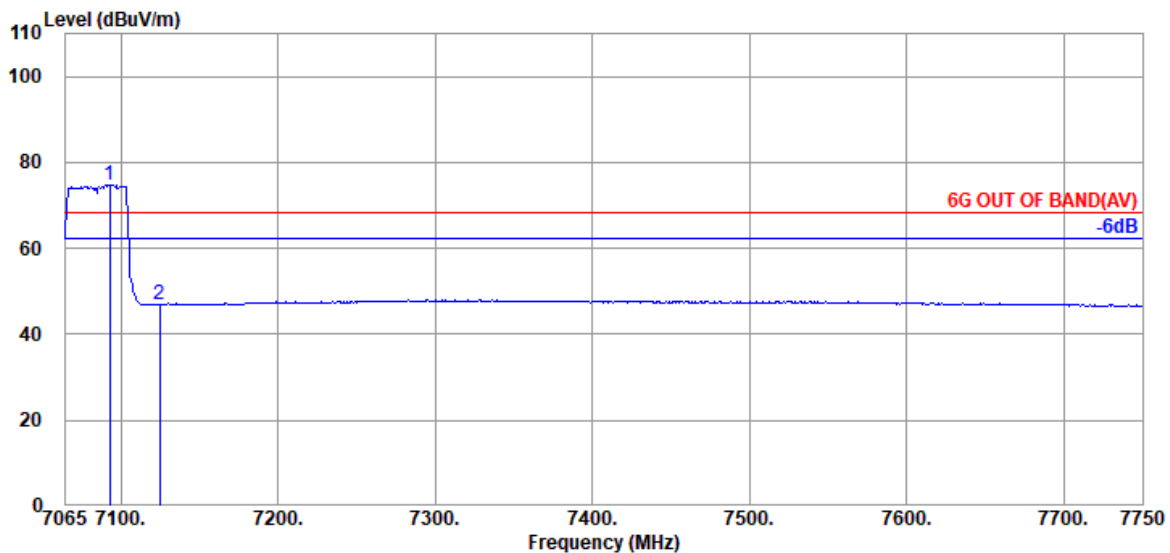


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7093.085               | 35.80                 | 9.80            | 39.49                  | 68.74             | 74.85                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 40.70             | 46.89                   | 68.20           | 21.31       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

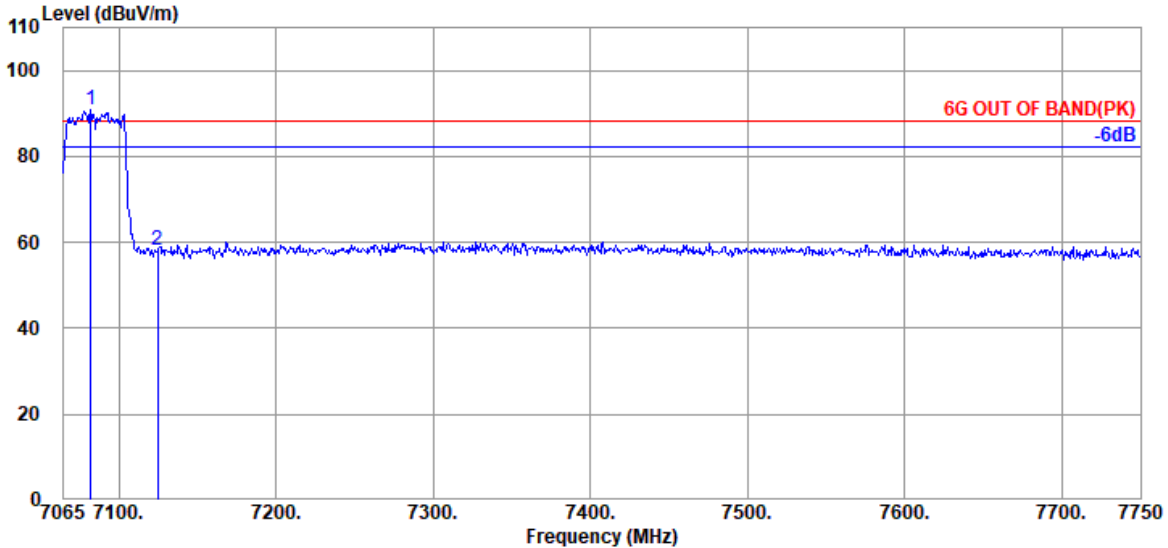

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7082.125               | 35.70                 | 9.78            | 39.49            | 84.68             | 90.67                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.93             | 58.12                   | 88.20           | 30.08       | Peak     |

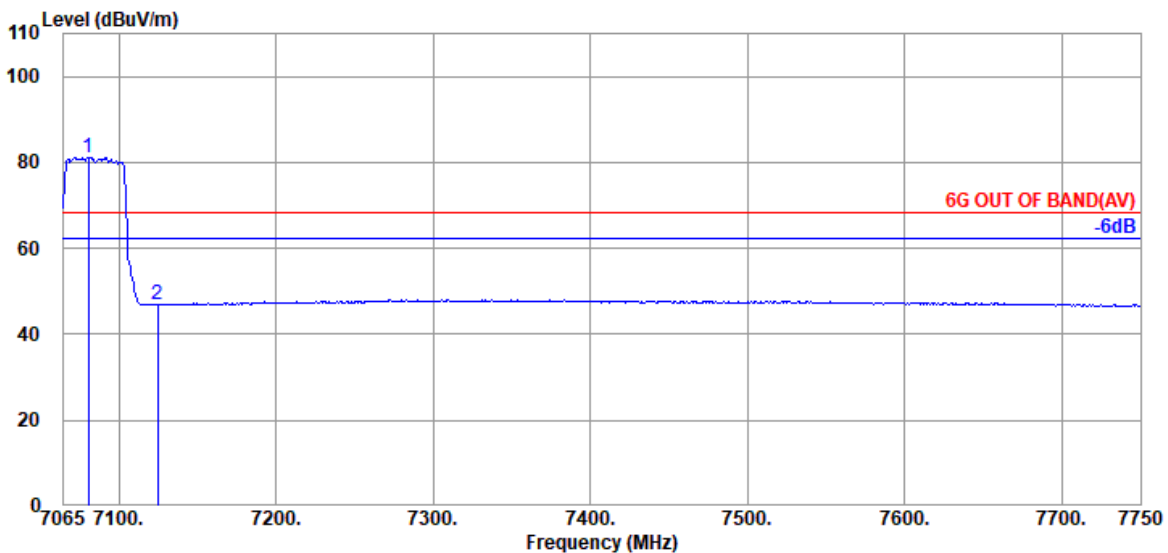


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7080.755               | 35.70                 | 9.78            | 39.49            | 75.25             | 81.24                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.76             | 46.95                   | 68.20           | 21.25       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

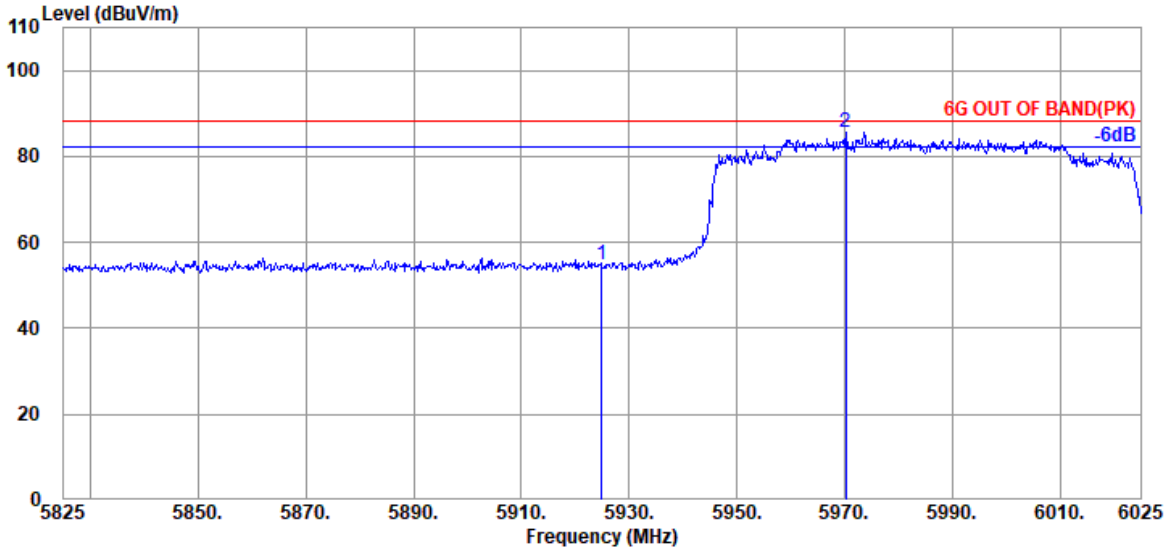

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 50.68             | 54.86                   | 88.20           | 33.34       | Peak     |
| @ 5970.200               | 34.27                 | 9.31            | 39.35            | 81.52             | 85.75                   | ---             | ---         | Peak     |

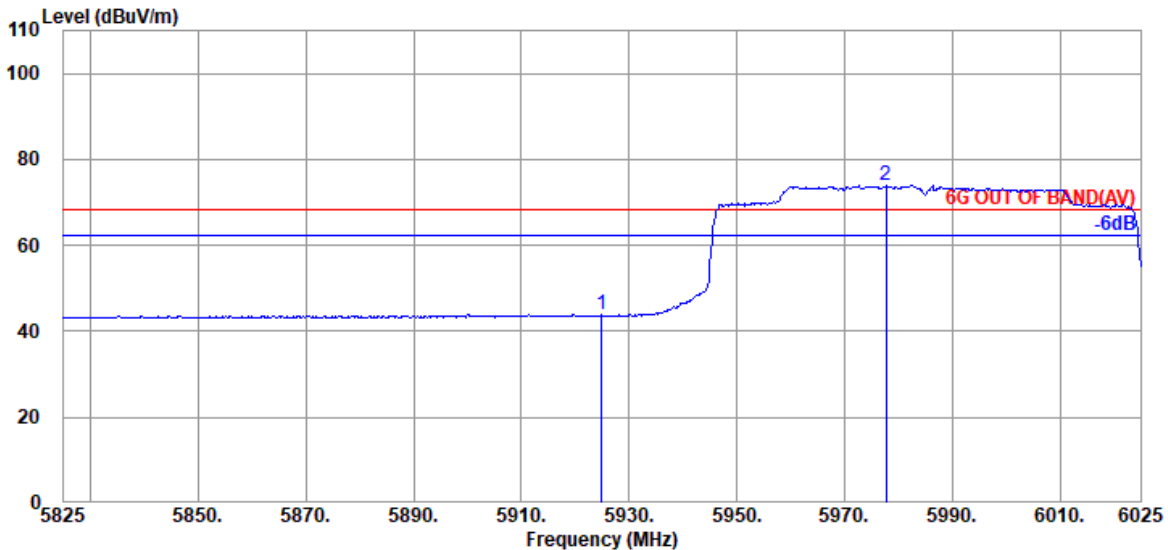


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 39.57             | 43.75                   | 68.20           | 24.45       | Average  |
| @ 5977.800               | 34.23                 | 9.32            | 39.36            | 69.77             | 73.96                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

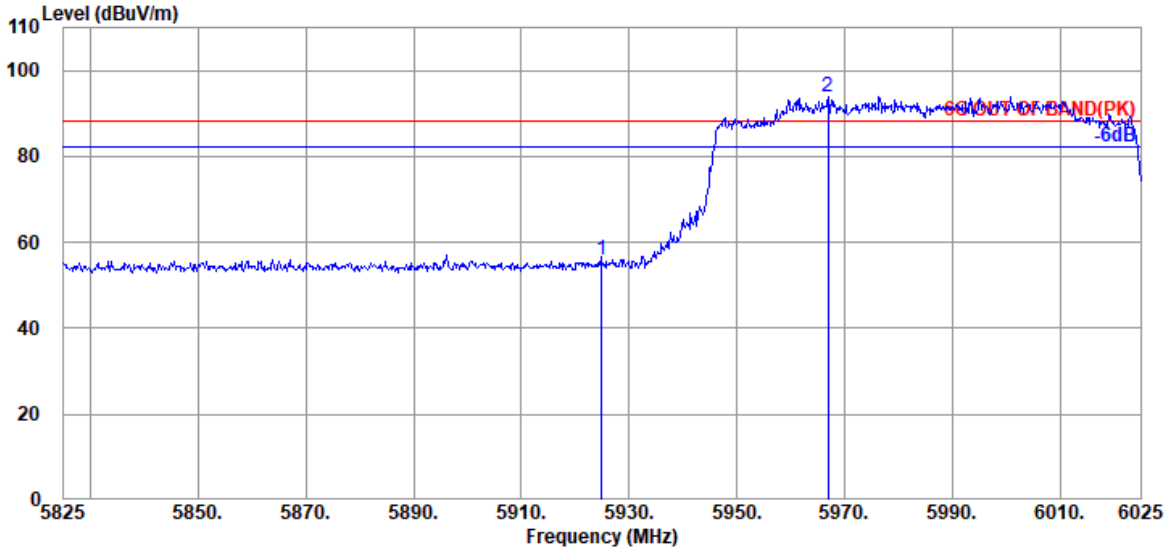

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 51.60             | 55.78                   | 88.20           | 32.42       | Peak     |
| @ 5967.000               | 34.27                 | 9.31            | 39.35                  | 89.49             | 93.72                   | ---             | ---         | Peak     |

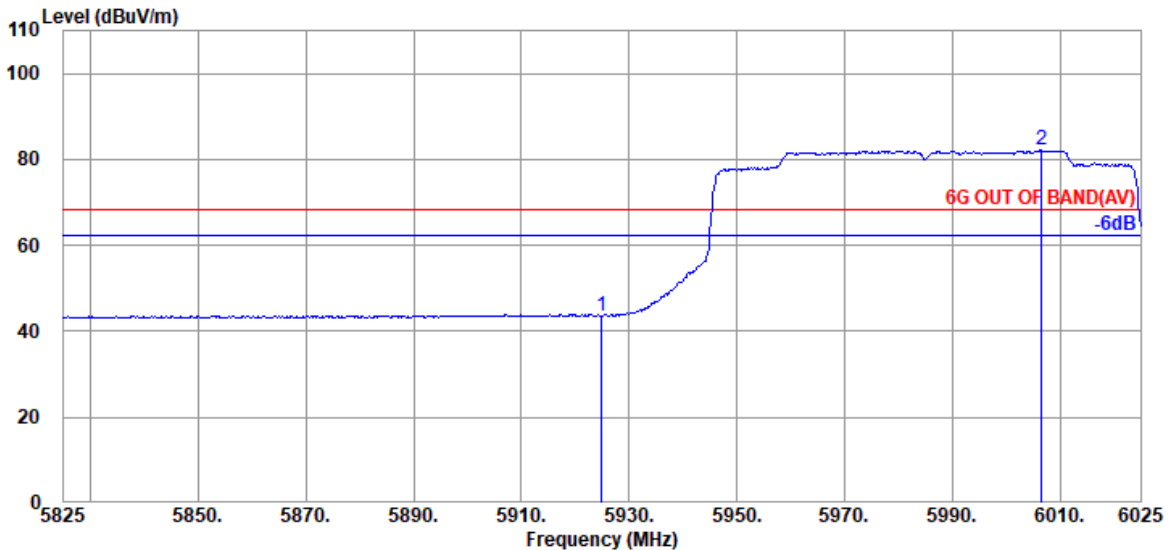


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 39.50             | 43.68                   | 68.20           | 24.52       | Average  |
| @ 6006.600               | 34.20                 | 9.33            | 39.36                  | 77.90             | 82.07                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

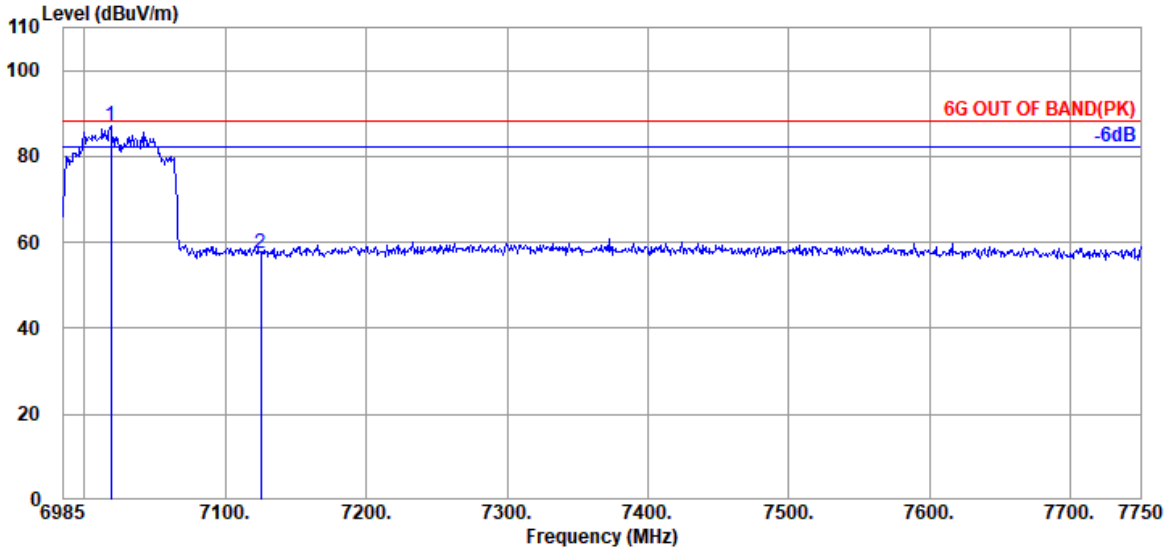

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7018.660                 | 35.53                 | 9.73            | 39.48            | 81.24             | 87.02                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.21             | 57.40                   | 88.20           | 30.80       | Peak     |

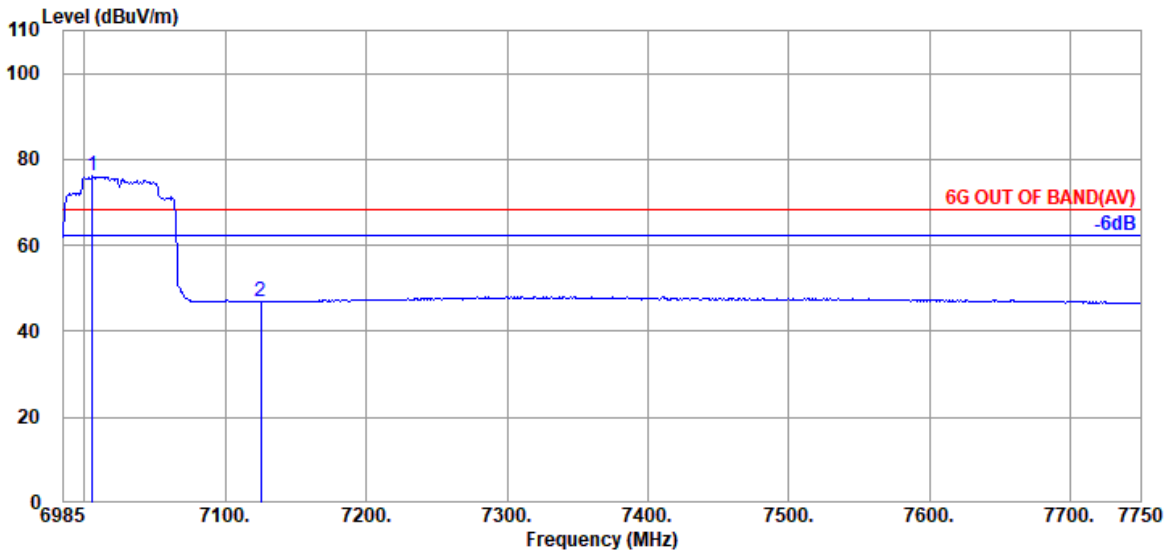


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7005.655                 | 35.53                 | 9.73            | 39.47            | 70.40             | 76.19                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.69             | 46.88                   | 68.20           | 21.32       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

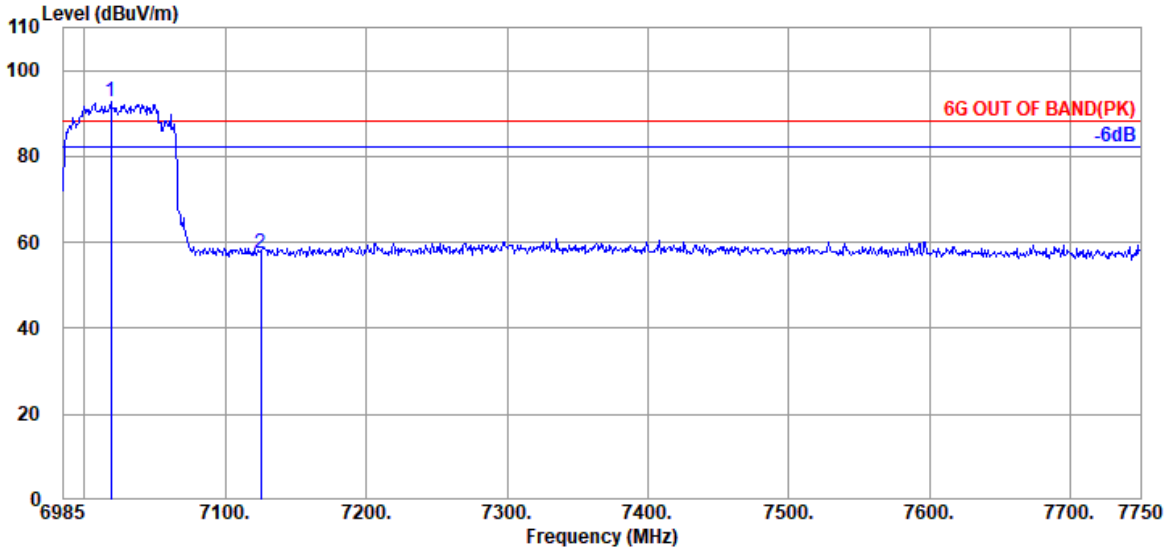

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7018.660               | 35.53                 | 9.73            | 39.48            | 86.91             | 92.69                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.42             | 57.61                   | 88.20           | 30.59       | Peak     |

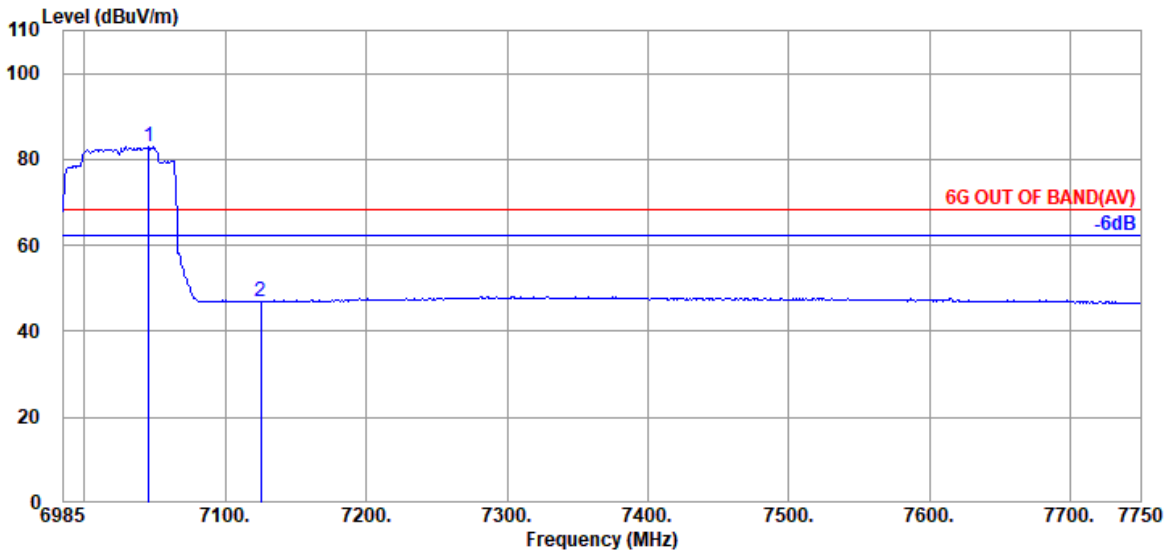


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7045.435               | 35.57                 | 9.75            | 39.48            | 77.15             | 82.99                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.74             | 46.93                   | 68.20           | 21.27       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

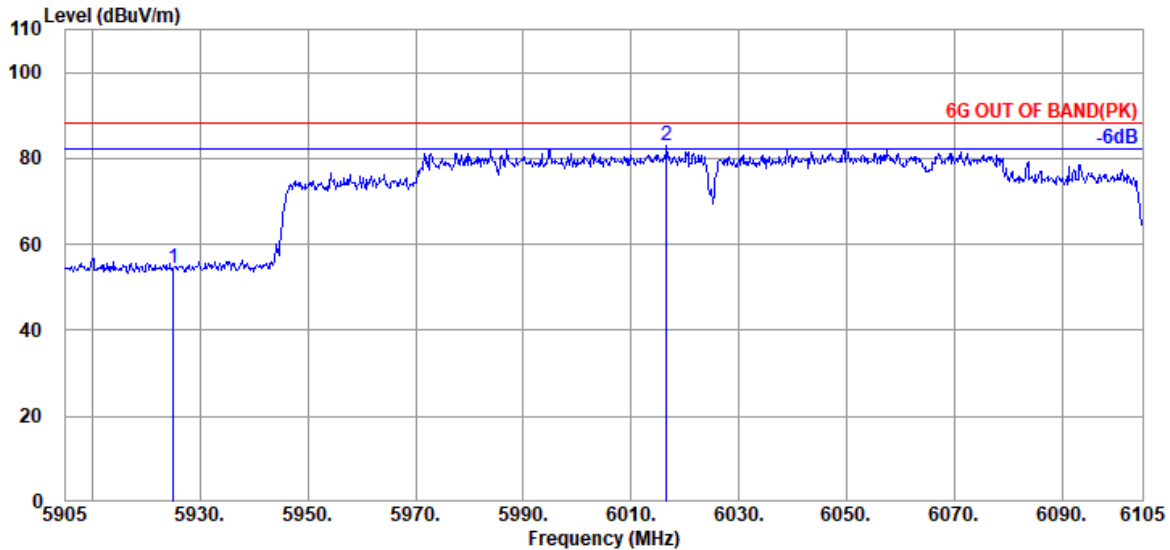

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 50.11             | 54.29                   | 88.20           | 33.91       | Peak     |
| @ 6016.600               | 34.20                 | 9.34            | 39.36            | 78.75             | 82.93                   | ---             | ---         | Peak     |

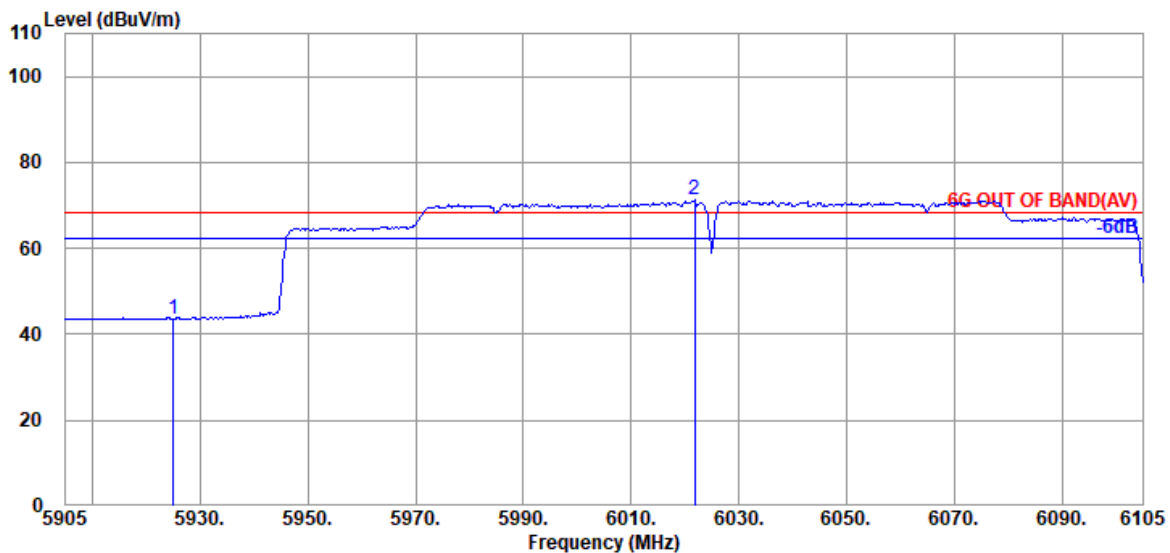


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 39.52             | 43.70                   | 68.20           | 24.50       | Average  |
| @ 6021.800               | 34.20                 | 9.34            | 39.36            | 67.15             | 71.33                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

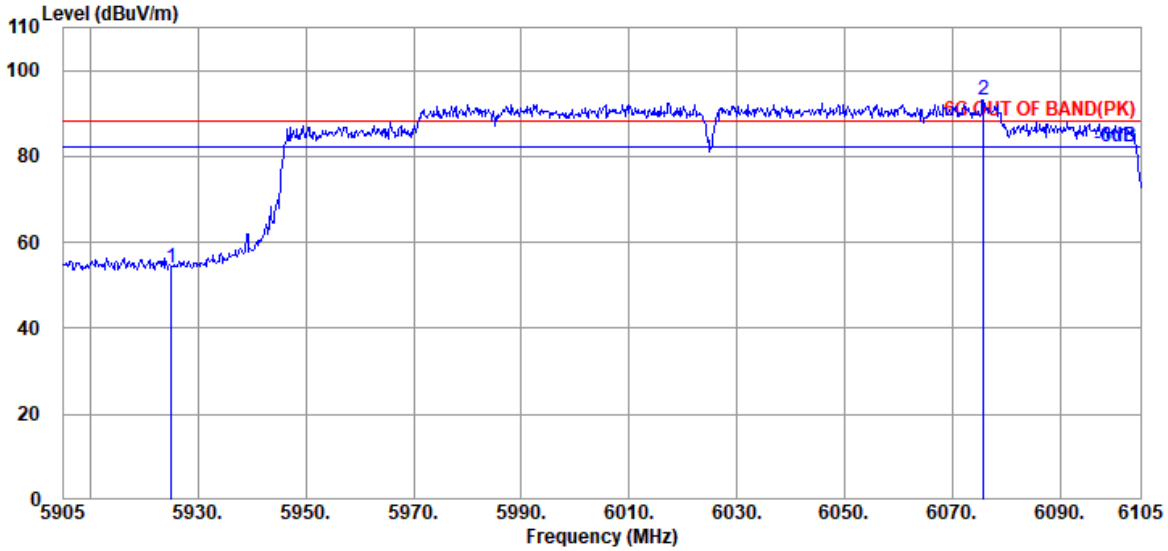

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.87             | 54.05                   | 88.20           | 34.15       | Peak     |
| @ 6075.800               | 34.23                 | 9.36            | 39.37            | 88.93             | 93.15                   | ---             | ---         | Peak     |

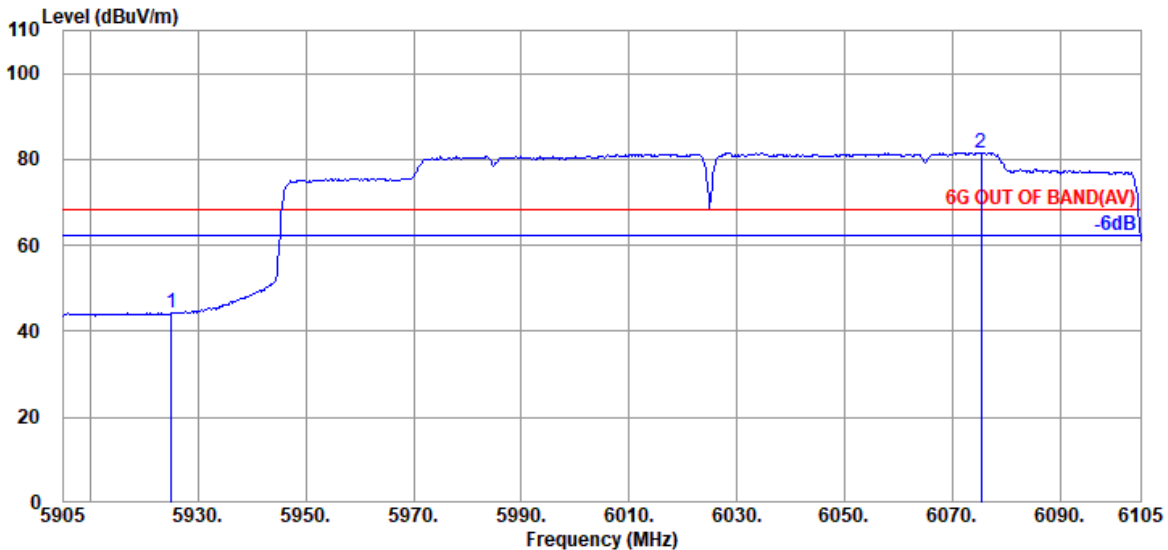


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 40.28             | 44.46                   | 68.20           | 23.74       | Average  |
| @ 6075.400               | 34.23                 | 9.36            | 39.37            | 77.43             | 81.65                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

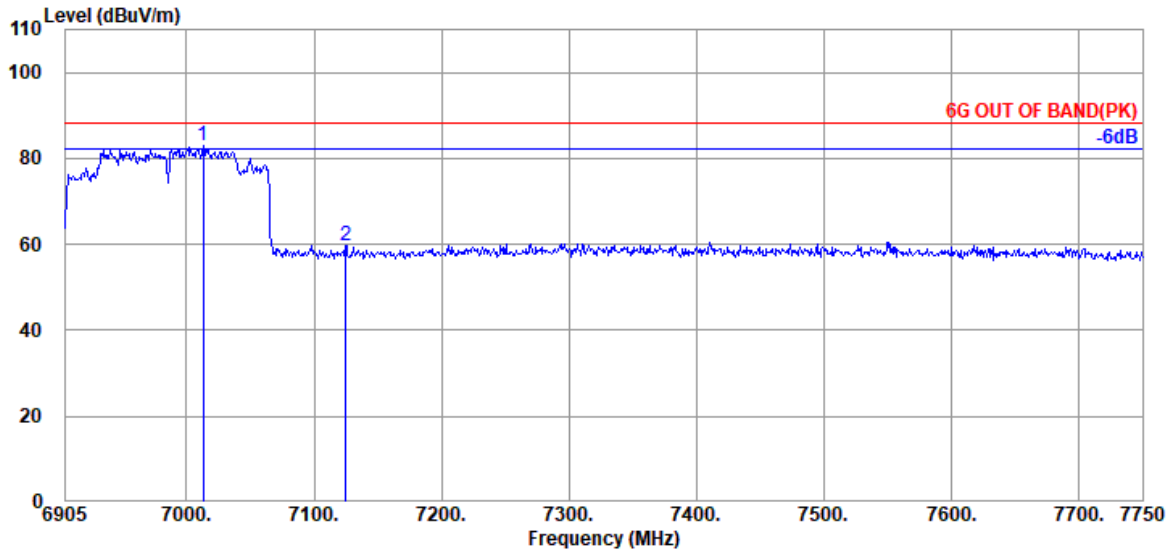

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7013.160               | 35.53                 | 9.73            | 39.47            | 77.24             | 83.03                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 53.35             | 59.54                   | 88.20           | 28.66       | Peak     |

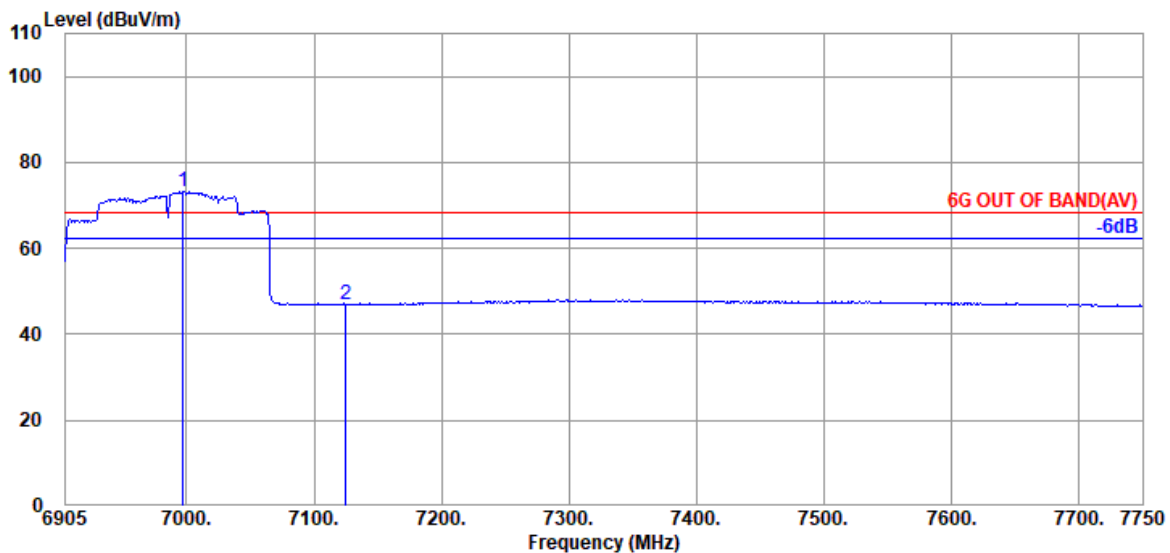


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6997.105               | 35.50                 | 9.71            | 39.47            | 67.58             | 73.32                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.83             | 47.02                   | 68.20           | 21.18       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

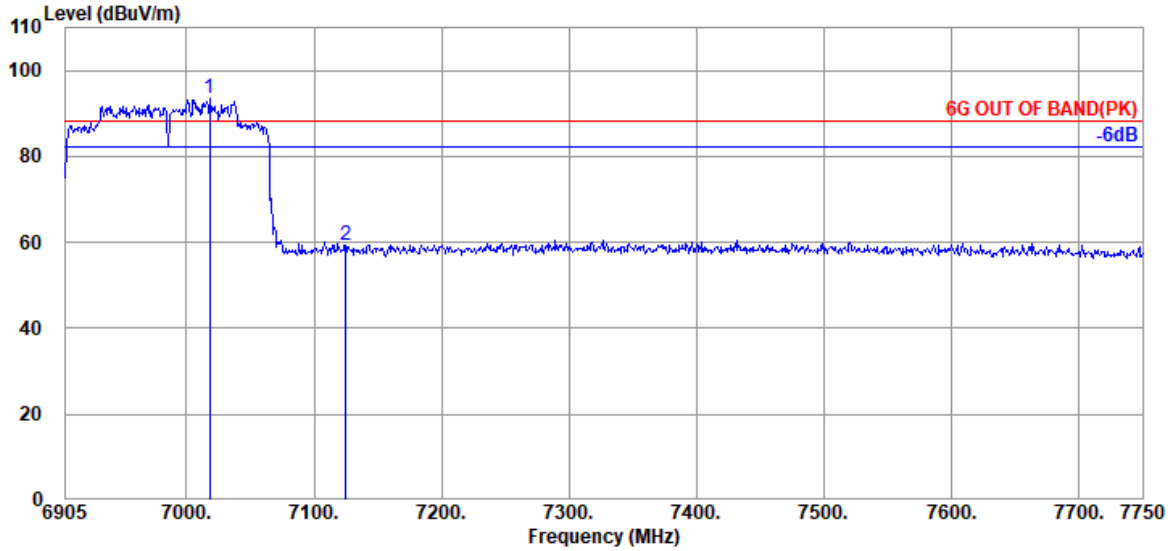

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7018.230               | 35.53                 | 9.73            | 39.48            | 87.67             | 93.45                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 53.25             | 59.44                   | 88.20           | 28.76       | Peak     |

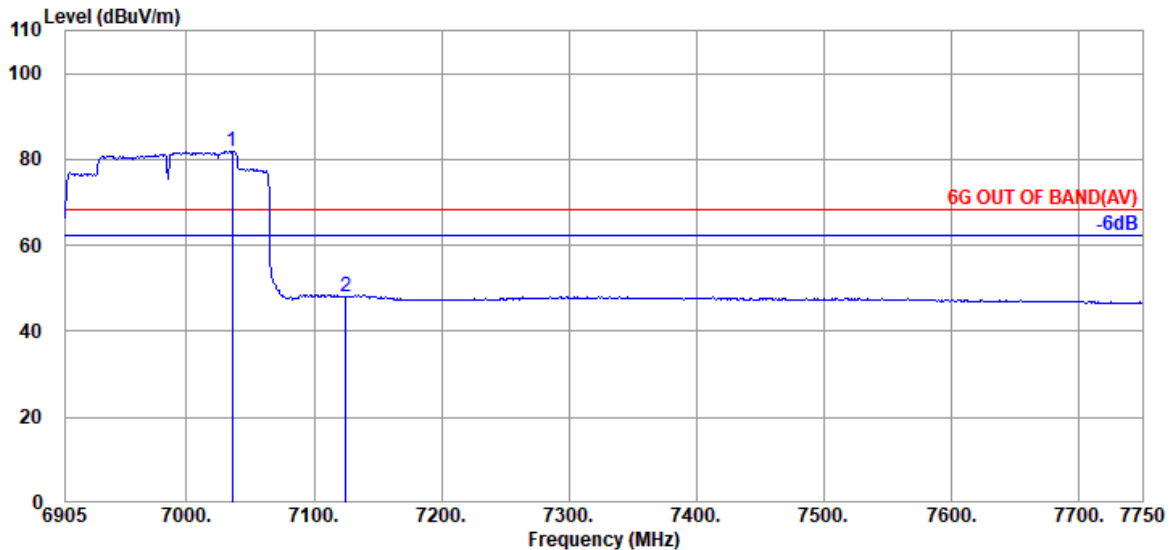

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7035.975               | 35.57                 | 9.75            | 39.48            | 76.08             | 81.92                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 41.84             | 48.03                   | 68.20           | 20.17       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**


● OFDMA Modulation

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 0          |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

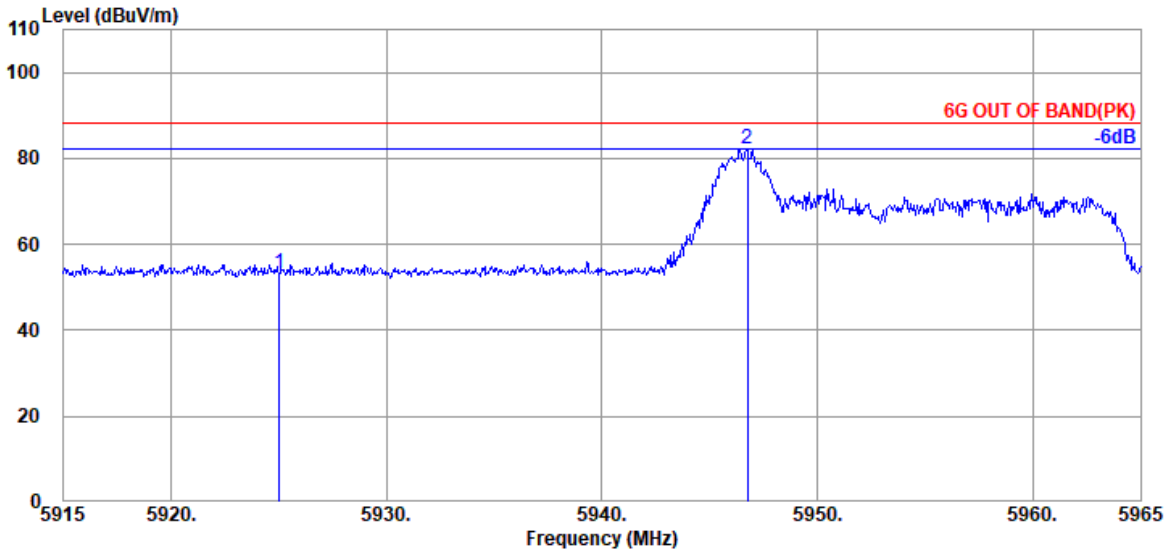

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 48.95             | 53.13                   | 88.20           | 35.07       | Peak     |
| @ 5946.750               | 34.30                 | 9.30            | 39.35            | 78.01             | 82.26                   | ---             | ---         | Peak     |

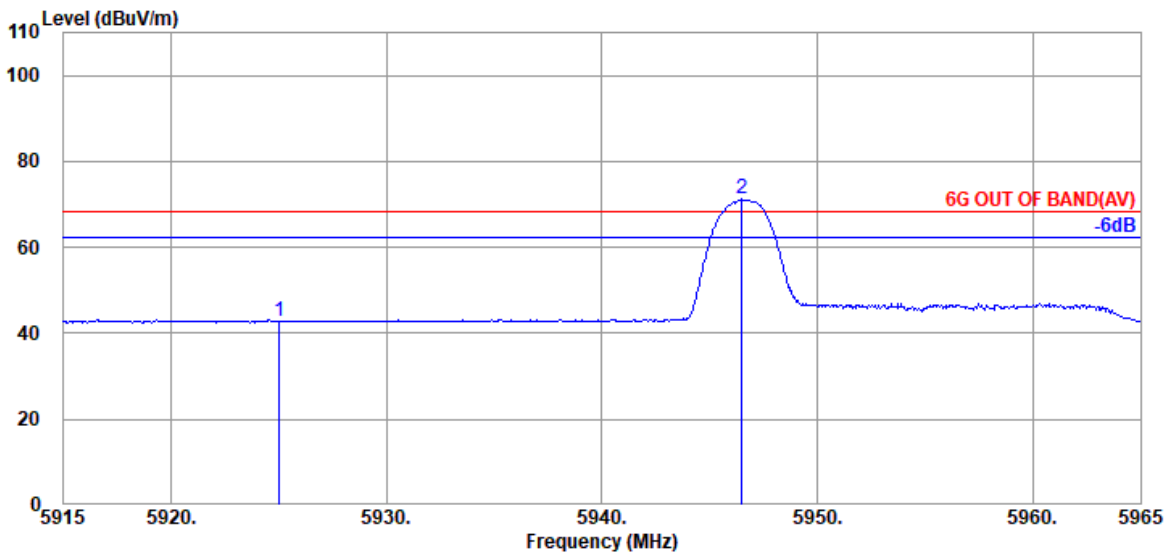


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.48             | 42.66                   | 68.20           | 25.54       | Average  |
| @ 5946.500               | 34.30                 | 9.30            | 39.35            | 66.93             | 71.18                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 0          |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

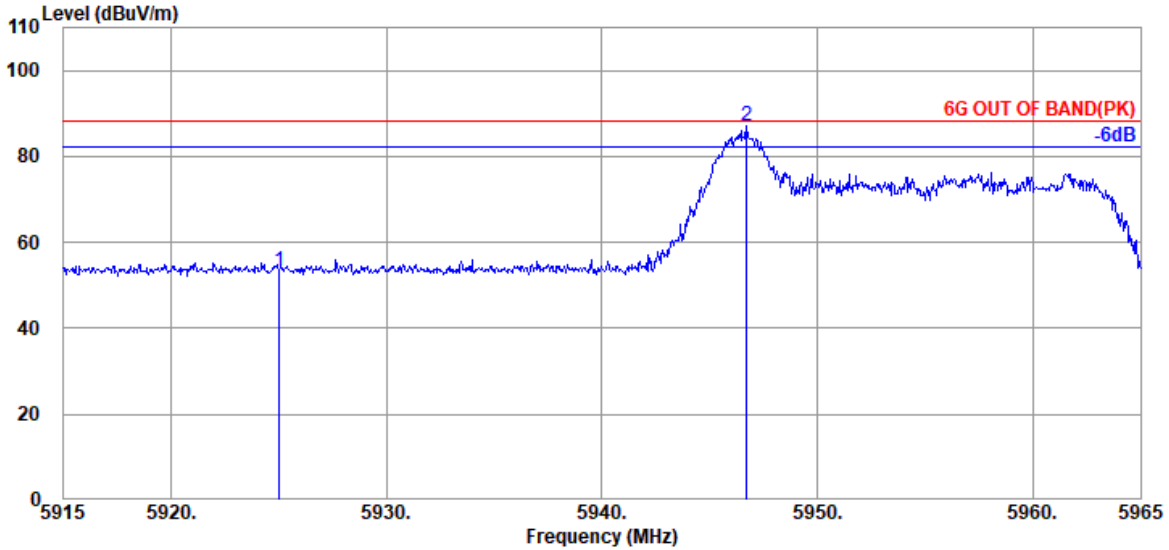

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.13             | 53.31                   | 88.20           | 34.89       | Peak     |
| @ 5946.700               | 34.30                 | 9.30            | 39.35            | 82.67             | 86.92                   | ---             | ---         | Peak     |

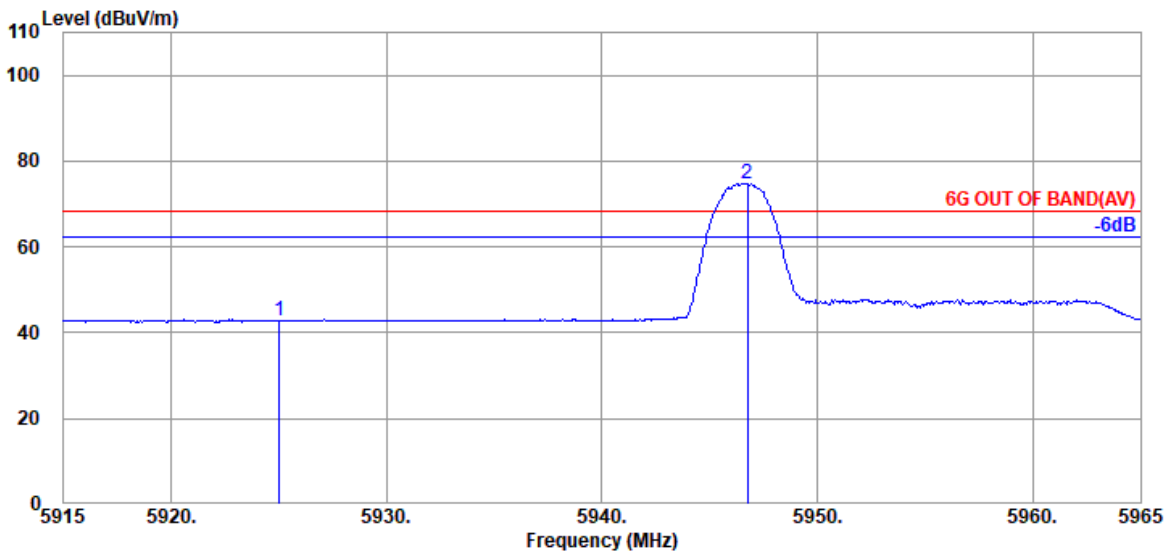


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.63             | 42.81                   | 68.20           | 25.39       | Average  |
| @ 5946.750               | 34.30                 | 9.30            | 39.35            | 70.58             | 74.83                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

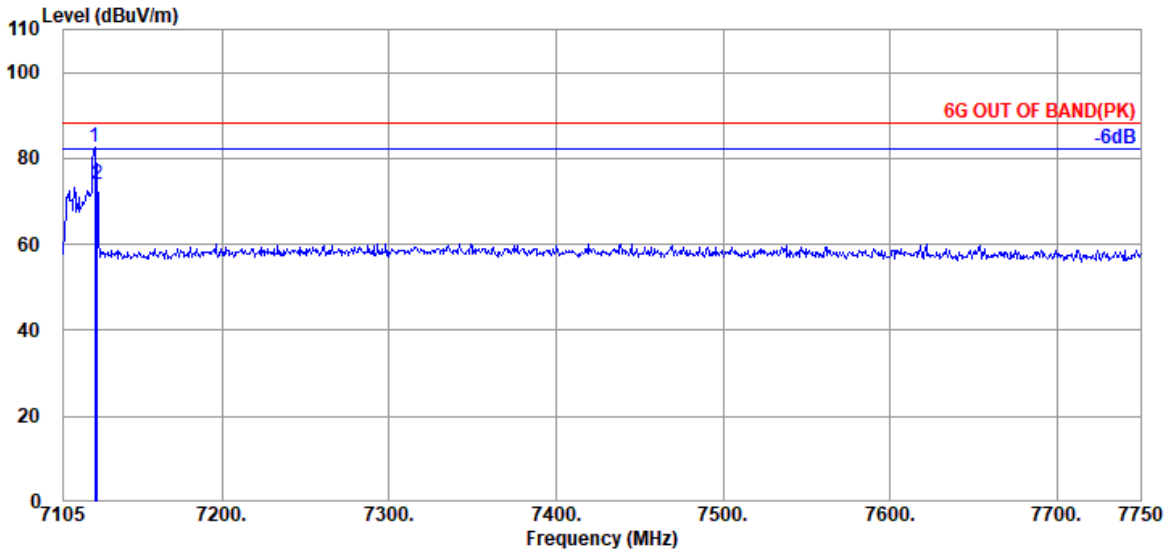

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.87                 | 9.82            | 39.50            | 76.44             | 82.63                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 67.84             | 74.03                   | 88.20           | 14.17       | Peak     |

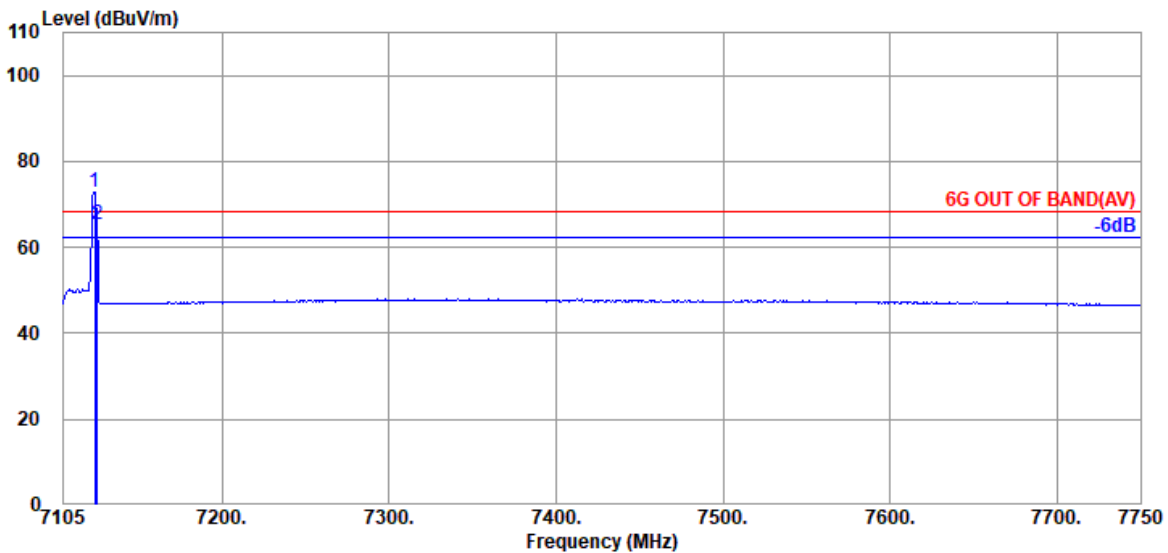

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.87                 | 9.82            | 39.50            | 66.83             | 73.02                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 59.19             | 65.38                   | 68.20           | 2.82        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

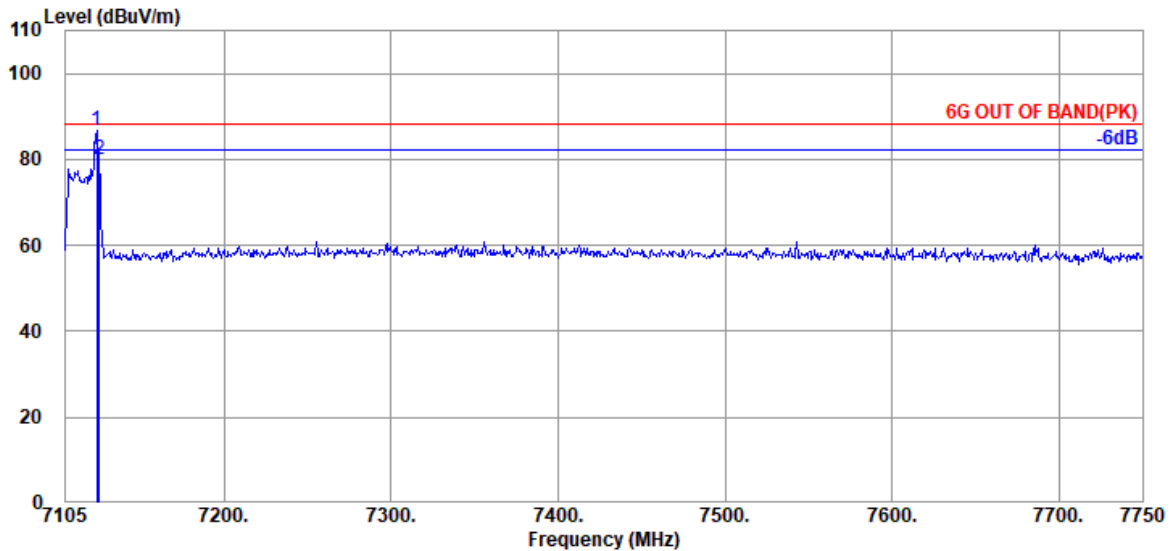

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.87                 | 9.82            | 39.50            | 80.63             | 86.82                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 73.79             | 79.98                   | 88.20           | 8.22        | Peak     |

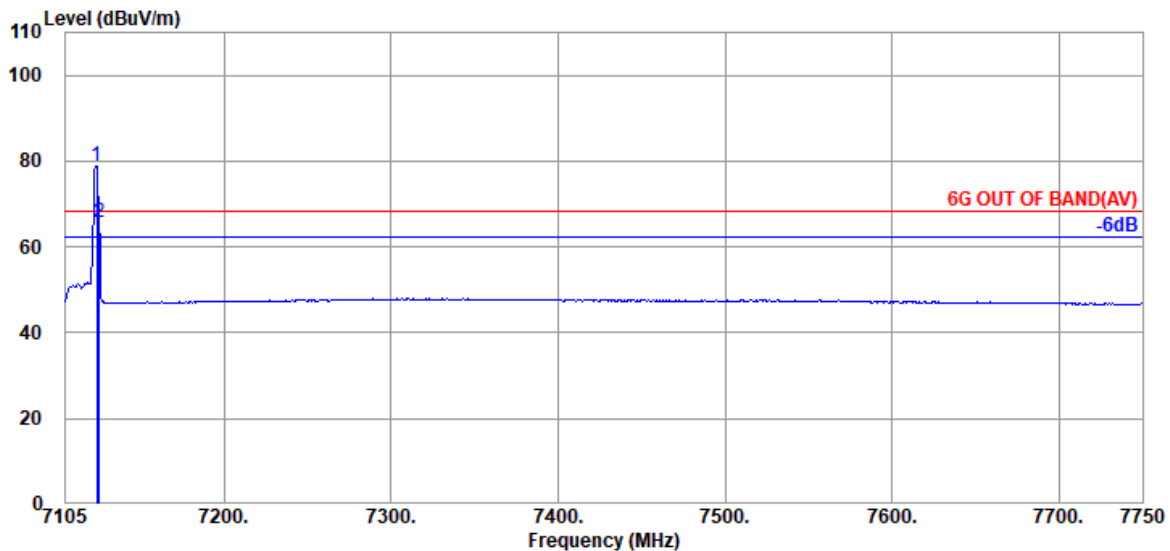

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7123.705                 | 35.87                 | 9.82            | 39.50            | 72.83             | 79.02                   | ---             | ---         | Average  |
| @ 7125.000               | 35.87                 | 9.82            | 39.50            | 59.50             | 65.69                   | 68.20           | 2.51        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

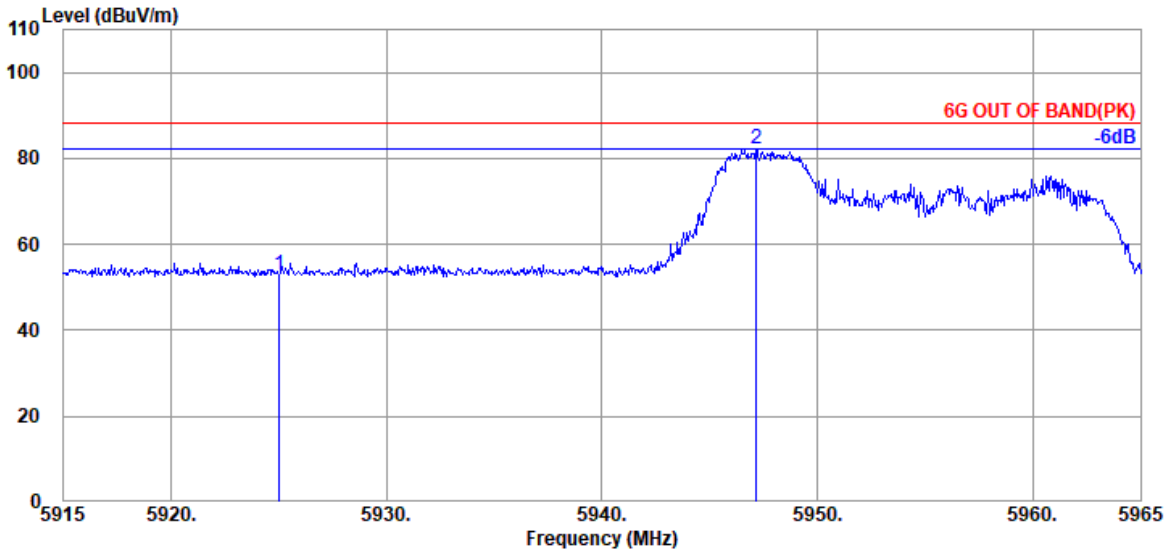

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 48.71             | 52.89                   | 88.20           | 35.31       | Peak     |
| @ 5947.150               | 34.30                 | 9.30            | 39.35            | 77.87             | 82.12                   | ---             | ---         | Peak     |

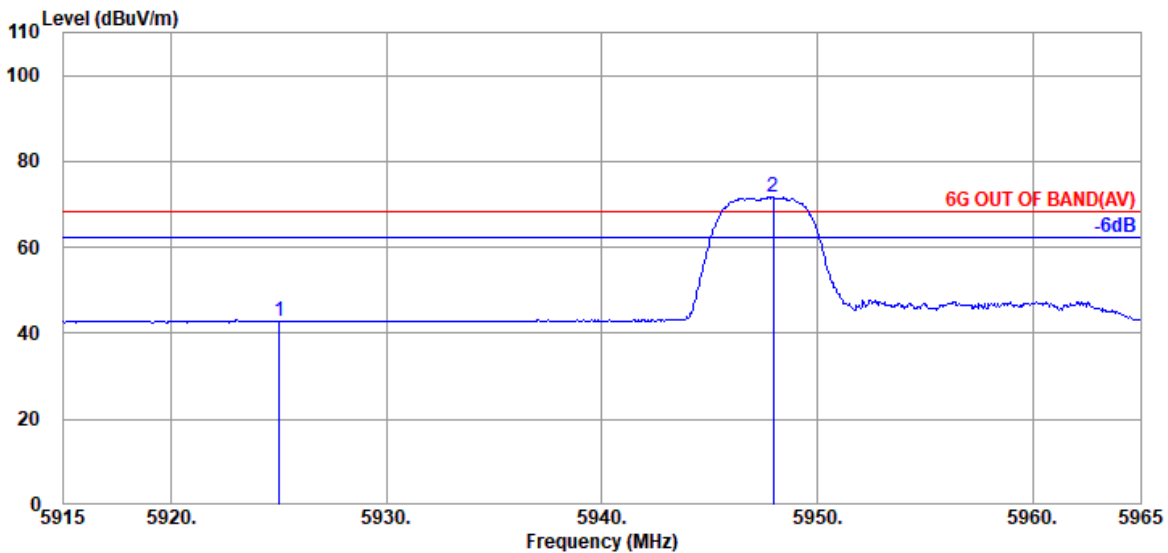


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.55             | 42.73                   | 68.20           | 25.47       | Average  |
| @ 5947.950               | 34.30                 | 9.30            | 39.35            | 67.54             | 71.79                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

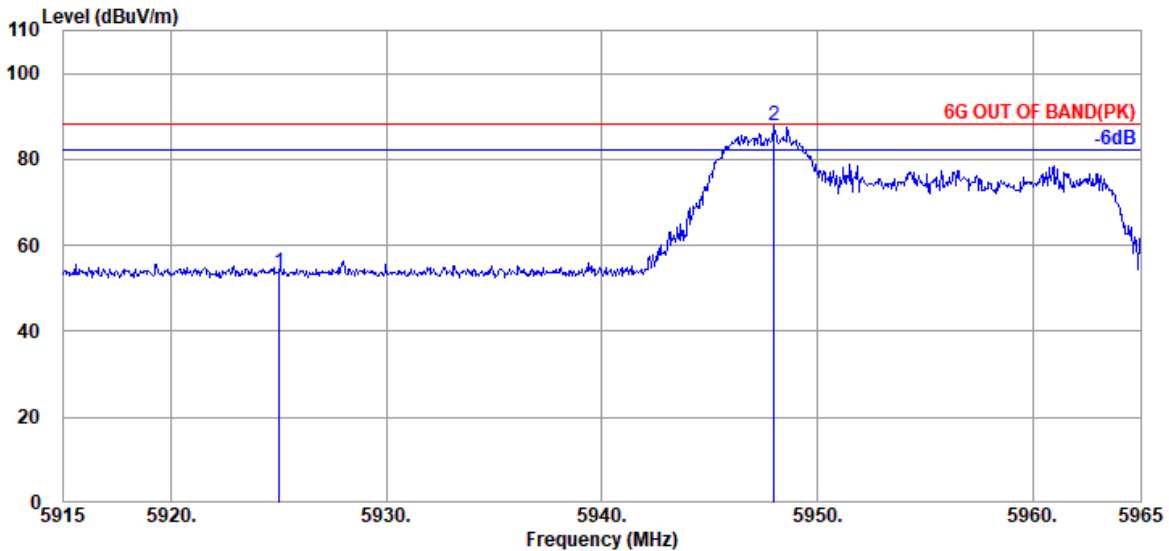

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.43             | 53.61                   | 88.20           | 34.59       | Peak     |
| @ 5948.000               | 34.30                 | 9.30            | 39.35            | 83.42             | 87.67                   | ---             | ---         | Peak     |

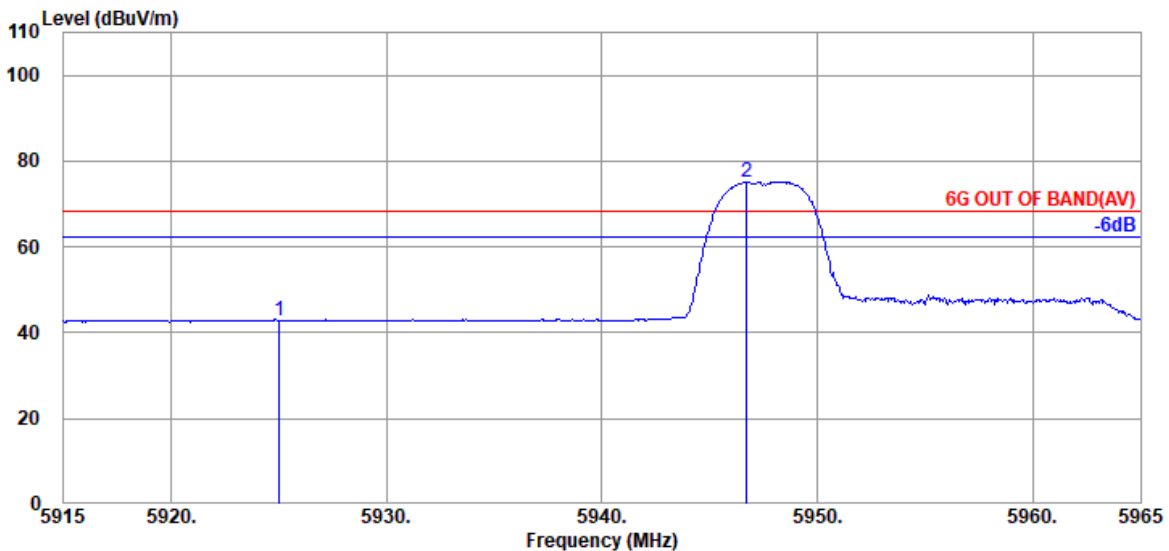

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.58             | 42.76                   | 68.20           | 25.44       | Average  |
| @ 5946.700               | 34.30                 | 9.30            | 39.35            | 70.91             | 75.16                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 40         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

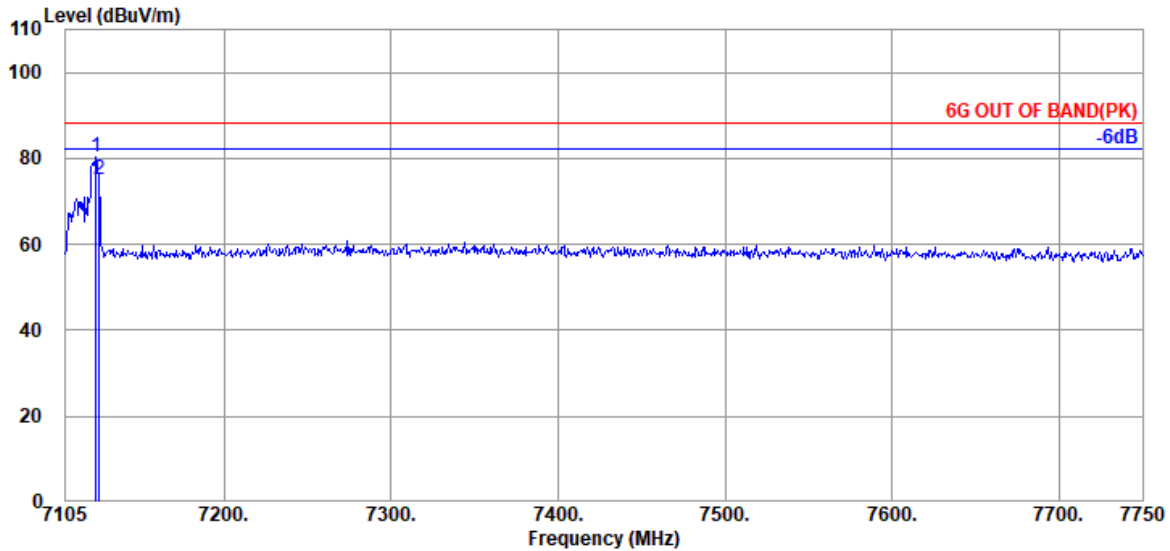

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7123.060                 | 35.87                 | 9.82            | 39.50            | 74.29             | 80.48                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 68.95             | 75.14                   | 88.20           | 13.06       | Peak     |

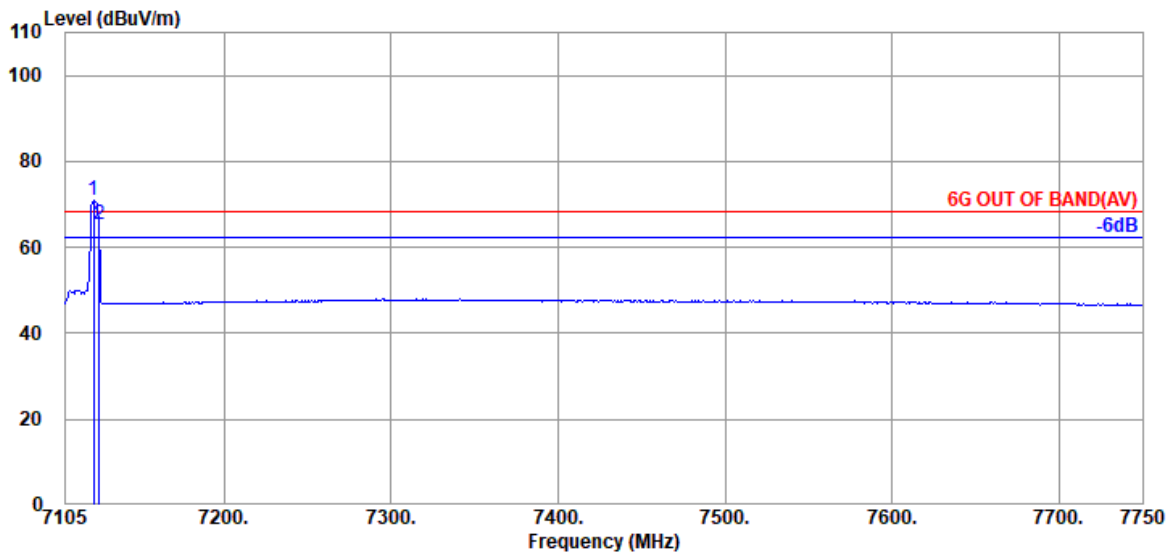


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7121.770                 | 35.87                 | 9.82            | 39.50            | 64.79             | 70.98                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 59.23             | 65.42                   | 68.20           | 2.78        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 40         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

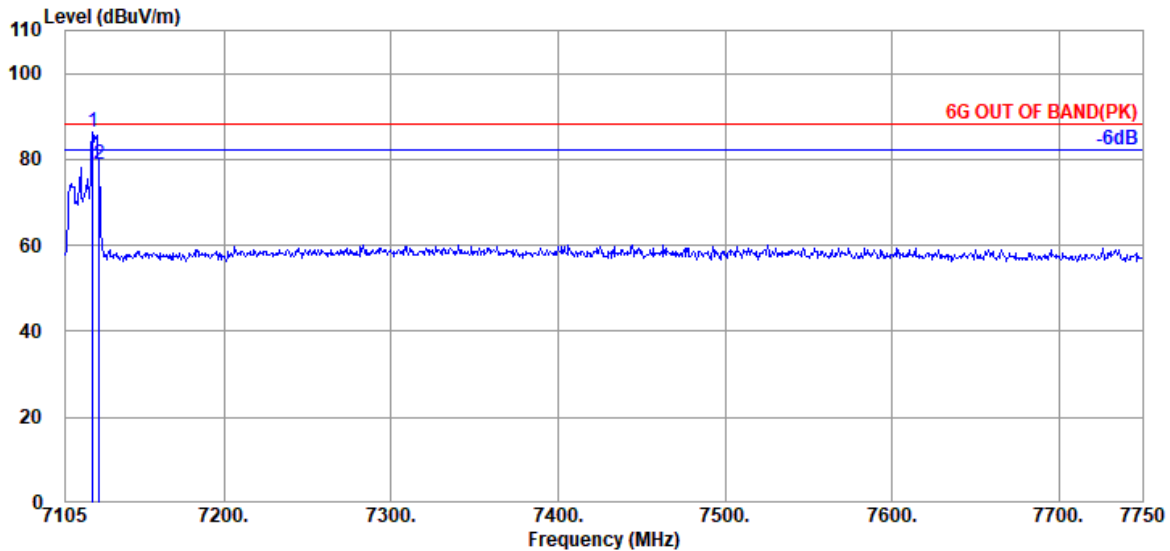

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7121.125               | 35.87                 | 9.82            | 39.50            | 80.32             | 86.51                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 72.55             | 78.74                   | 88.20           | 9.46        | Peak     |

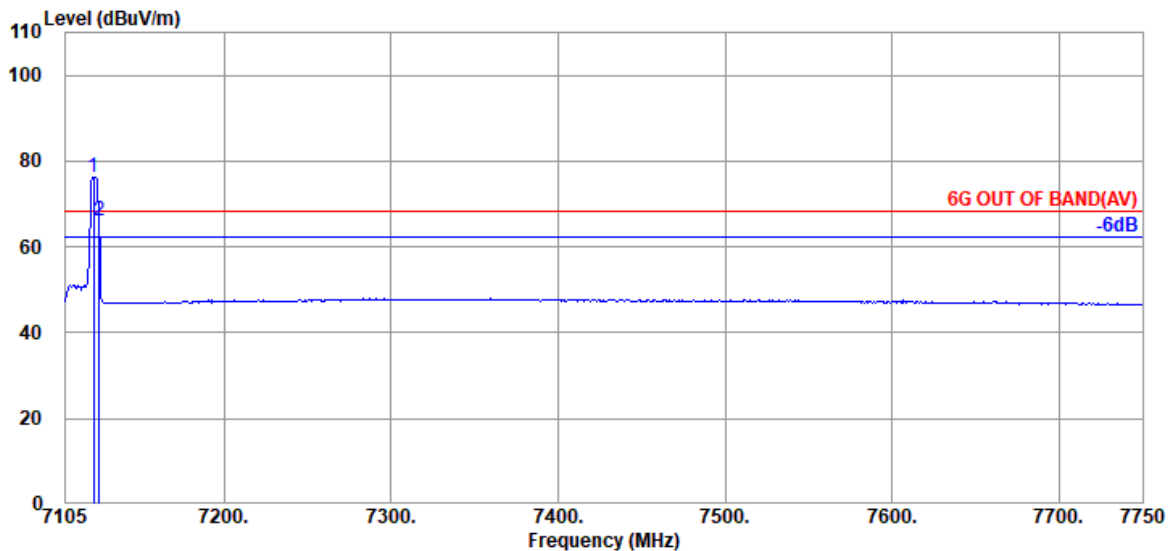

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7121.770               | 35.87                 | 9.82            | 39.50            | 70.20             | 76.39                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 59.94             | 66.13                   | 68.20           | 2.07        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

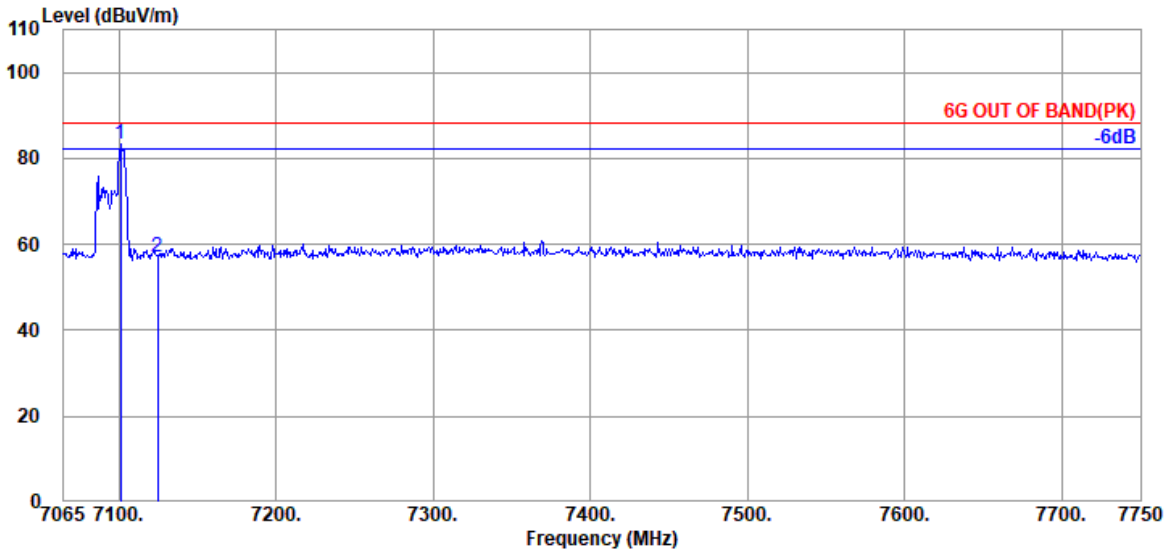

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7101.305                 | 35.80                 | 9.80            | 39.49            | 77.15             | 83.26                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 50.79             | 56.98                   | 88.20           | 31.22       | Peak     |

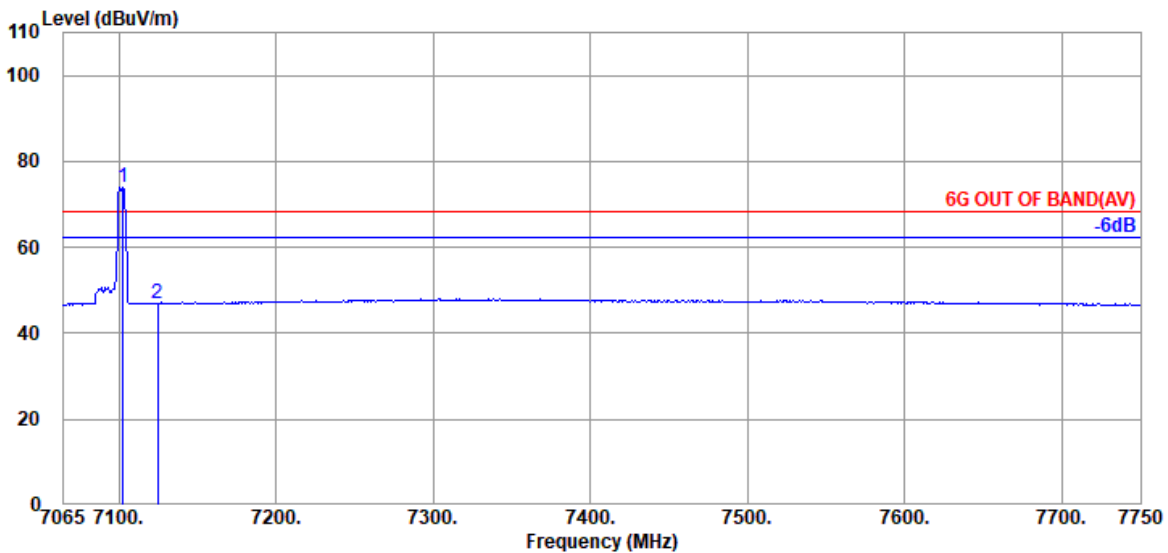

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7102.675                 | 35.80                 | 9.80            | 39.49            | 67.81             | 73.92                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.70             | 46.89                   | 68.20           | 21.31       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

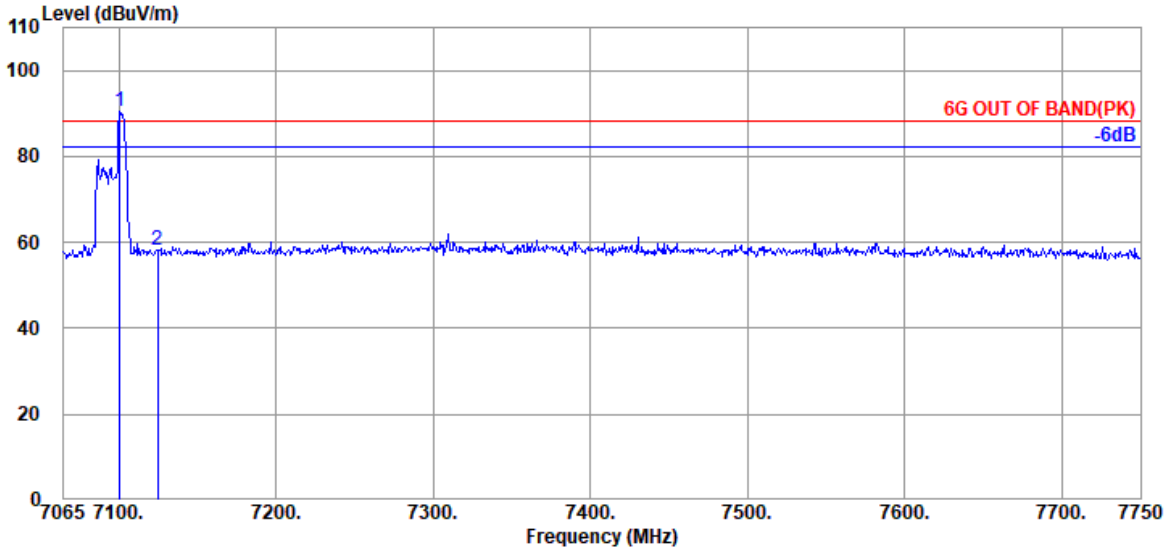

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.620               | 35.80                 | 9.80            | 39.49            | 84.54             | 90.65                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.92             | 58.11                   | 88.20           | 30.09       | Peak     |

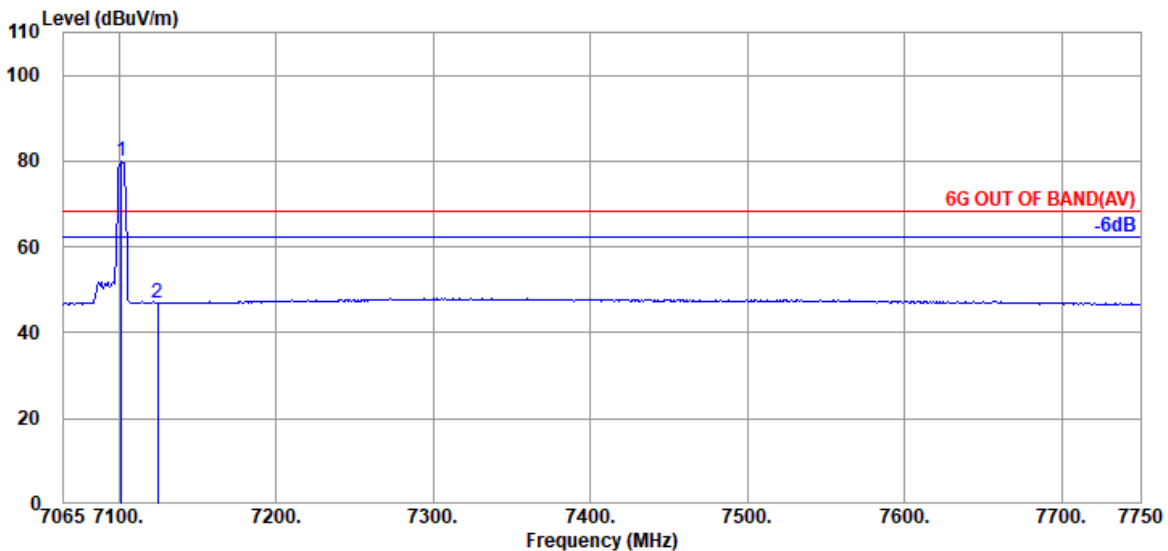

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.990               | 35.80                 | 9.80            | 39.49            | 73.76             | 79.87                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.75             | 46.94                   | 68.20           | 21.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

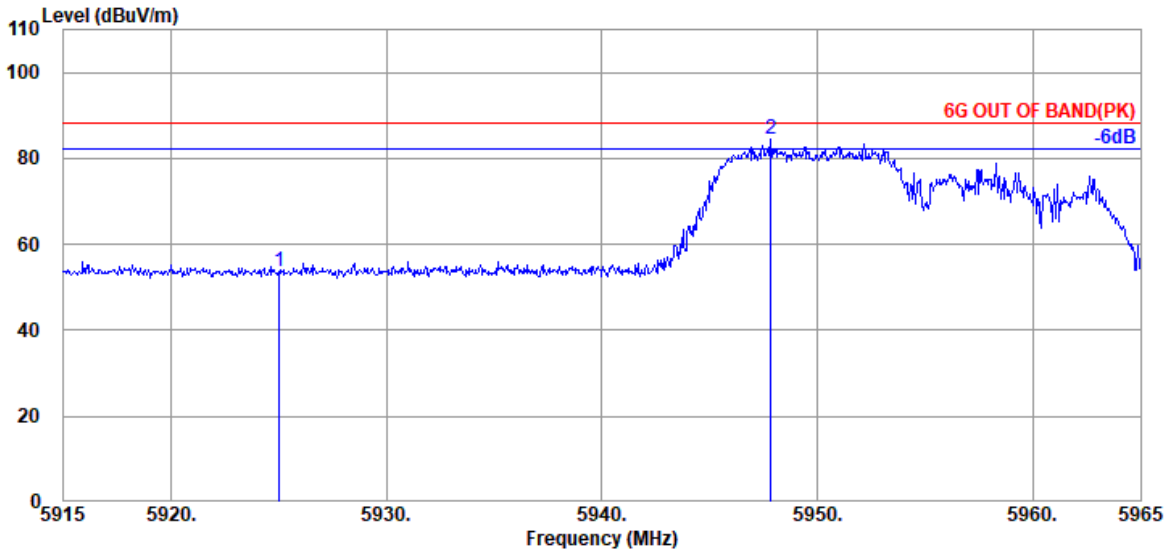

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.52             | 53.70                   | 88.20           | 34.50       | Peak     |
| @ 5947.850               | 34.30                 | 9.30            | 39.35            | 80.17             | 84.42                   | ---             | ---         | Peak     |

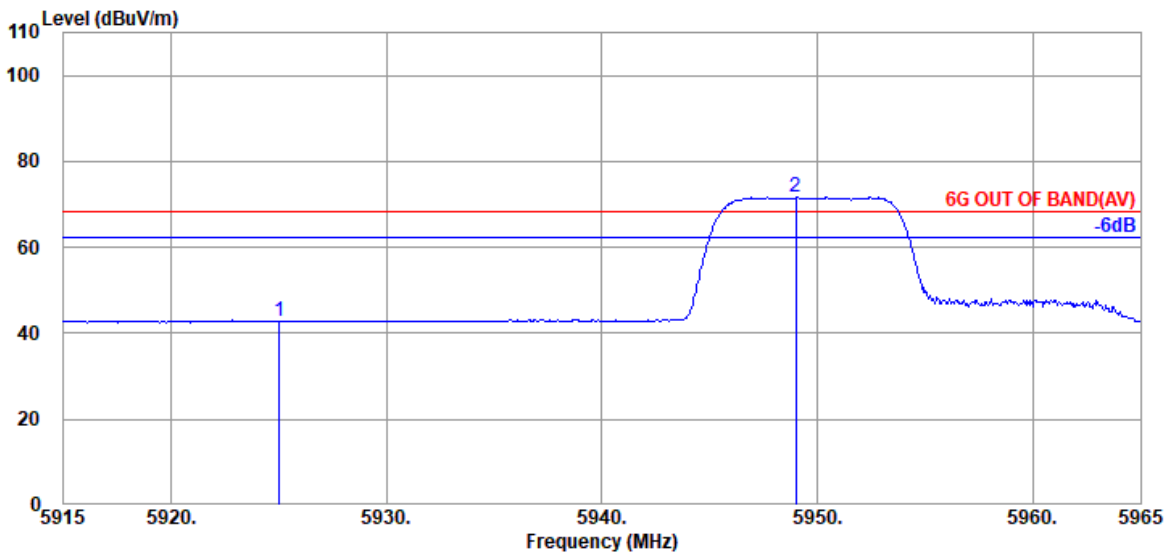

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.56             | 42.74                   | 68.20           | 25.46       | Average  |
| @ 5949.000               | 34.30                 | 9.30            | 39.35            | 67.52             | 71.77                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

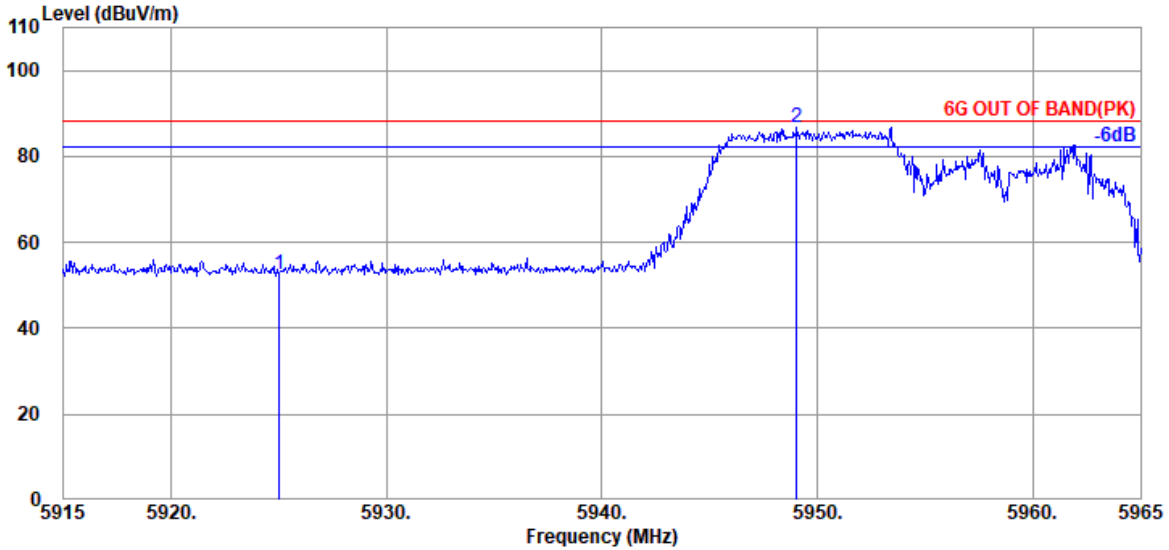

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 48.29             | 52.47                   | 88.20           | 35.73       | Peak     |
| @ 5949.050               | 34.30                 | 9.30            | 39.35            | 82.48             | 86.73                   | ---             | ---         | Peak     |

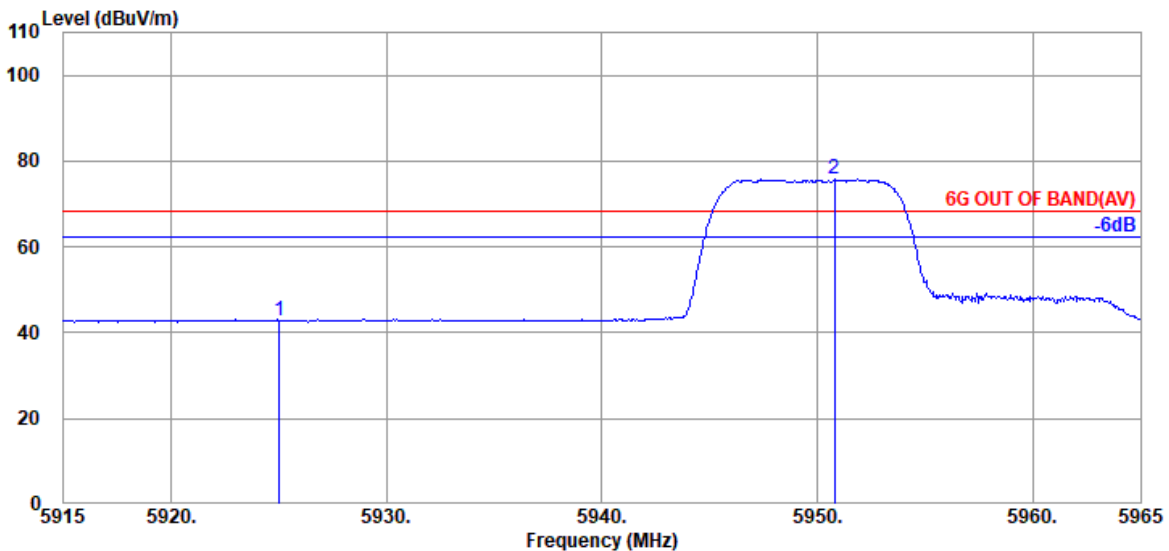

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.71             | 42.89                   | 68.20           | 25.31       | Average  |
| @ 5950.800               | 34.30                 | 9.30            | 39.35            | 71.47             | 75.72                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 54         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

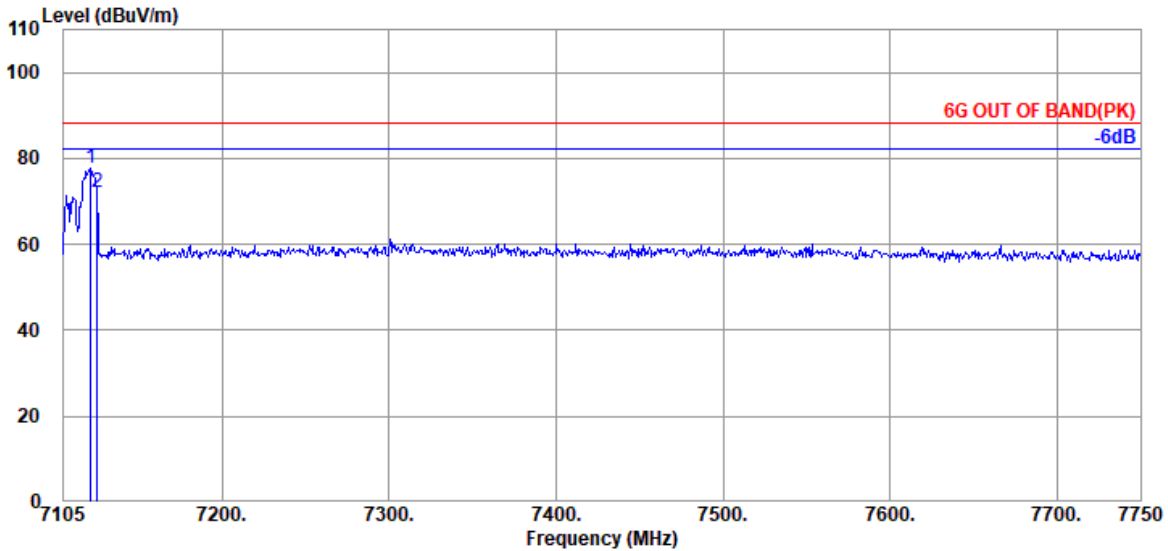

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7121.125                 | 35.87                 | 9.82            | 39.50            | 71.40             | 77.59                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 65.79             | 71.98                   | 88.20           | 16.22       | Peak     |

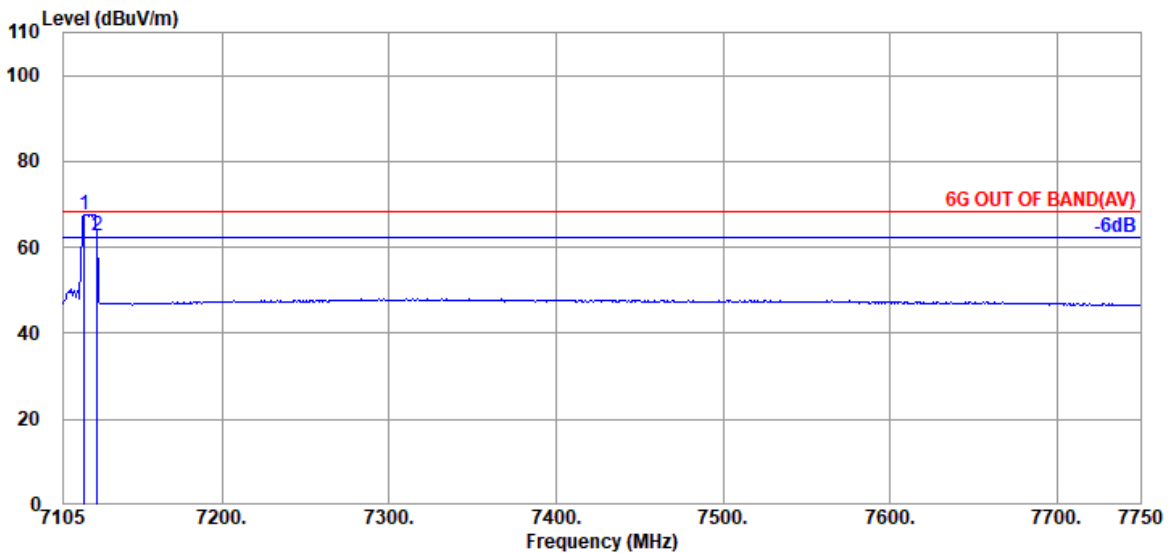

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7117.255                 | 35.87                 | 9.82            | 39.50            | 61.54             | 67.73                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 56.62             | 62.81                   | 68.20           | 5.39        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 54         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

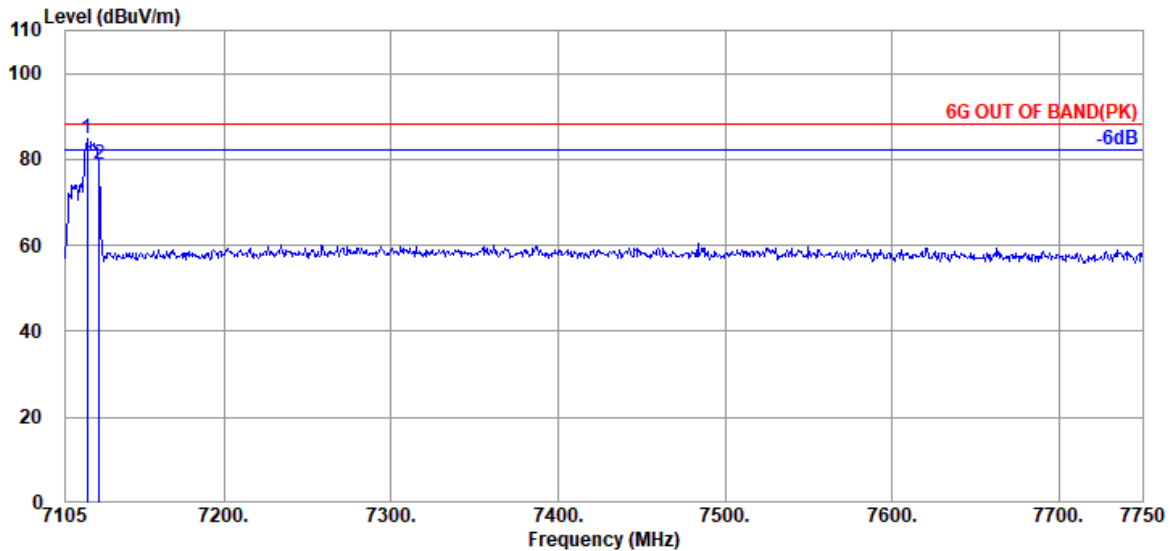

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7117.900               | 35.87                 | 9.82            | 39.50            | 78.84             | 85.03                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 72.80             | 78.99                   | 88.20           | 9.21        | Peak     |

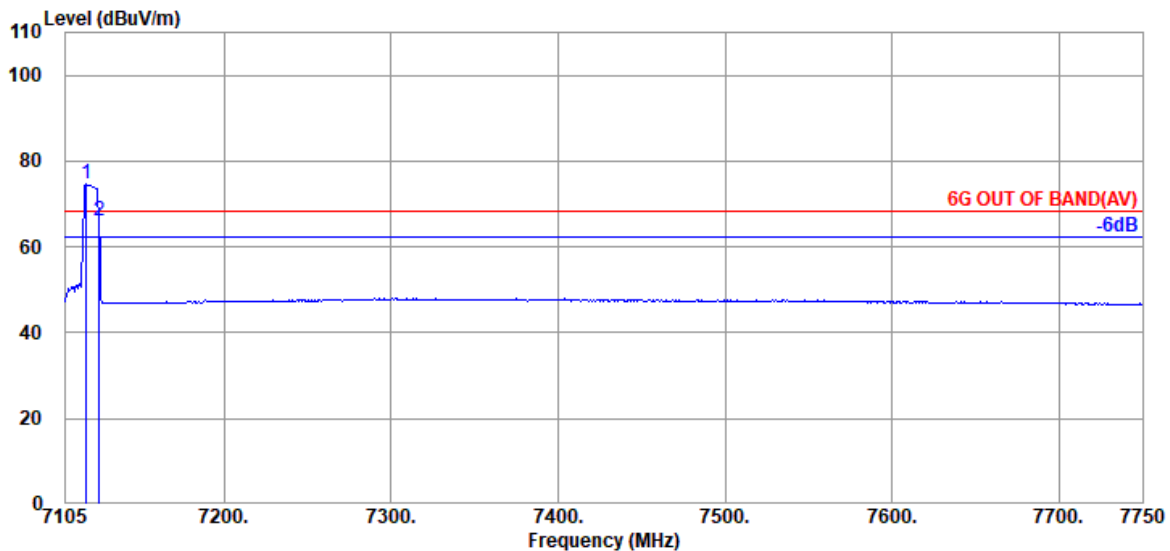


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7117.255               | 35.87                 | 9.82            | 39.50            | 68.52             | 74.71                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 59.81             | 66.00                   | 68.20           | 2.20        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

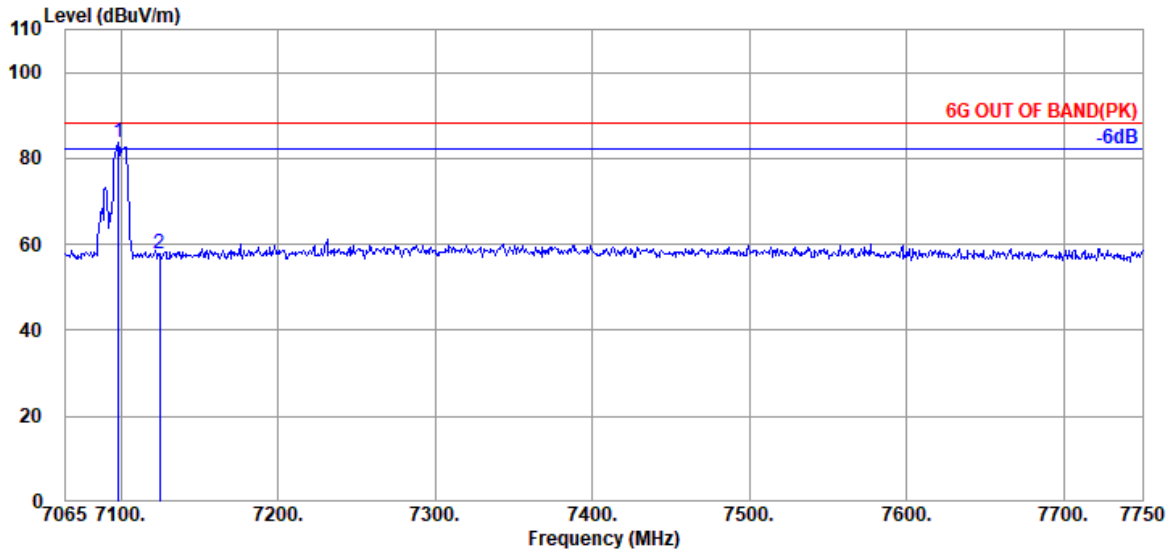

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.565               | 35.80                 | 9.80            | 39.49            | 77.58             | 83.69                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.55             | 57.74                   | 88.20           | 30.46       | Peak     |

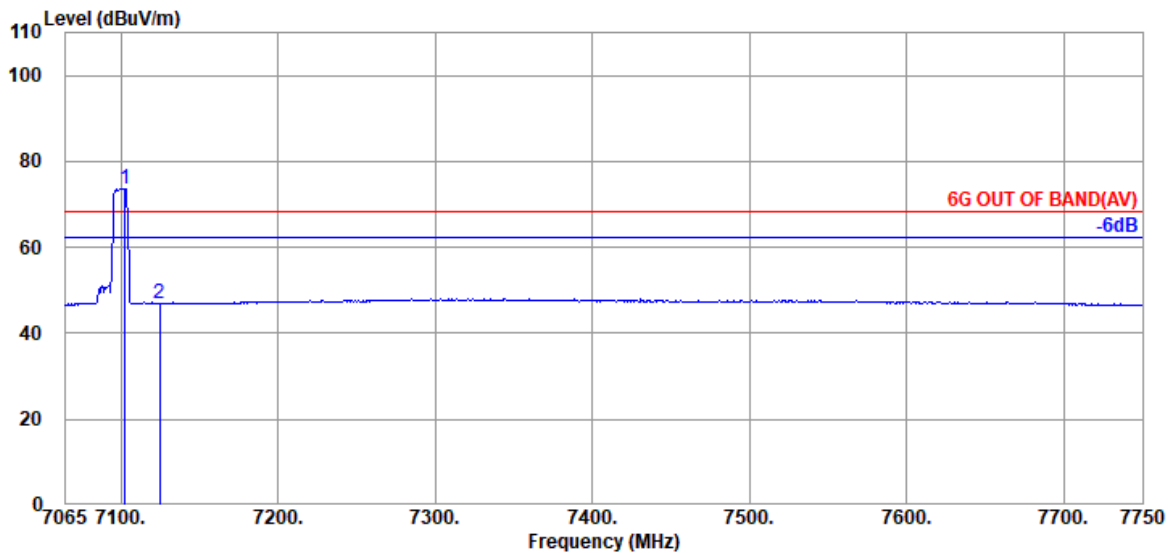

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7102.675               | 35.80                 | 9.80            | 39.49            | 67.66             | 73.77                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.72             | 46.91                   | 68.20           | 21.29       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

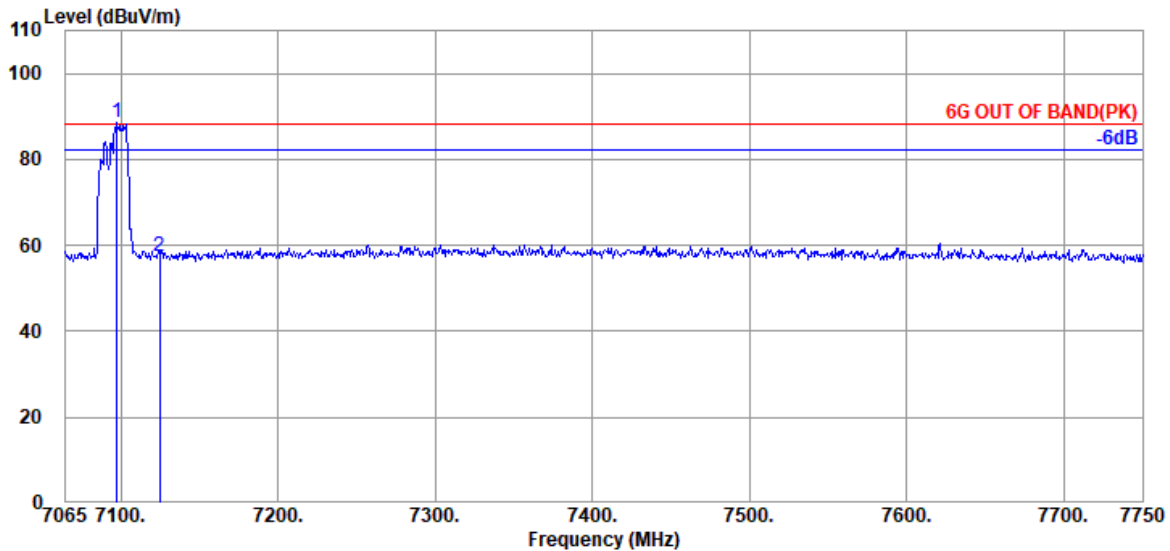

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7097.880               | 35.80                 | 9.80            | 39.49            | 82.42             | 88.53                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.21             | 57.40                   | 88.20           | 30.80       | Peak     |

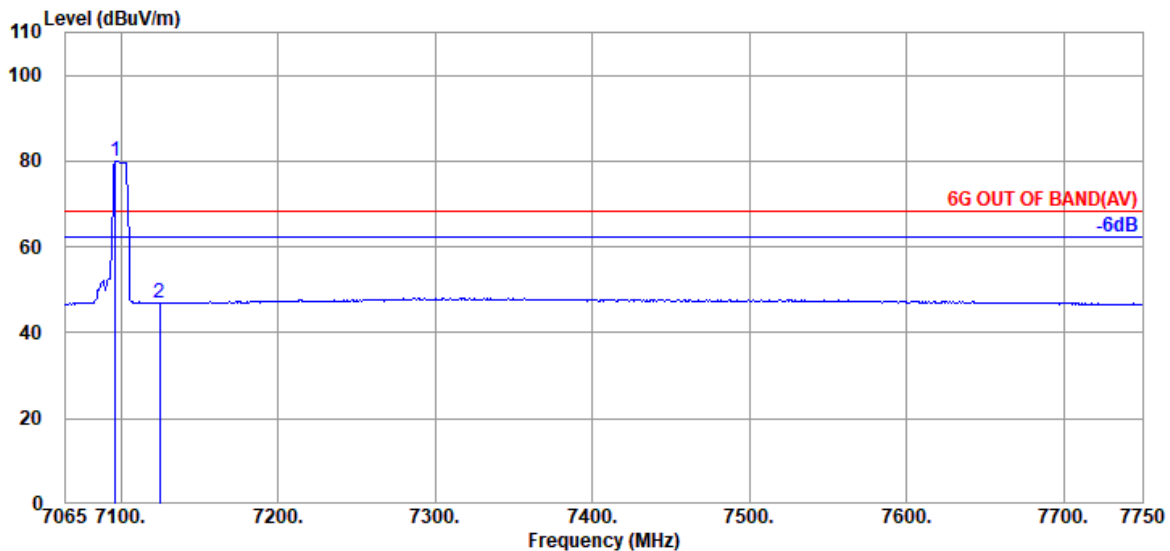

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.510               | 35.80                 | 9.80            | 39.49            | 73.97             | 80.08                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.80             | 46.99                   | 68.20           | 21.21       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

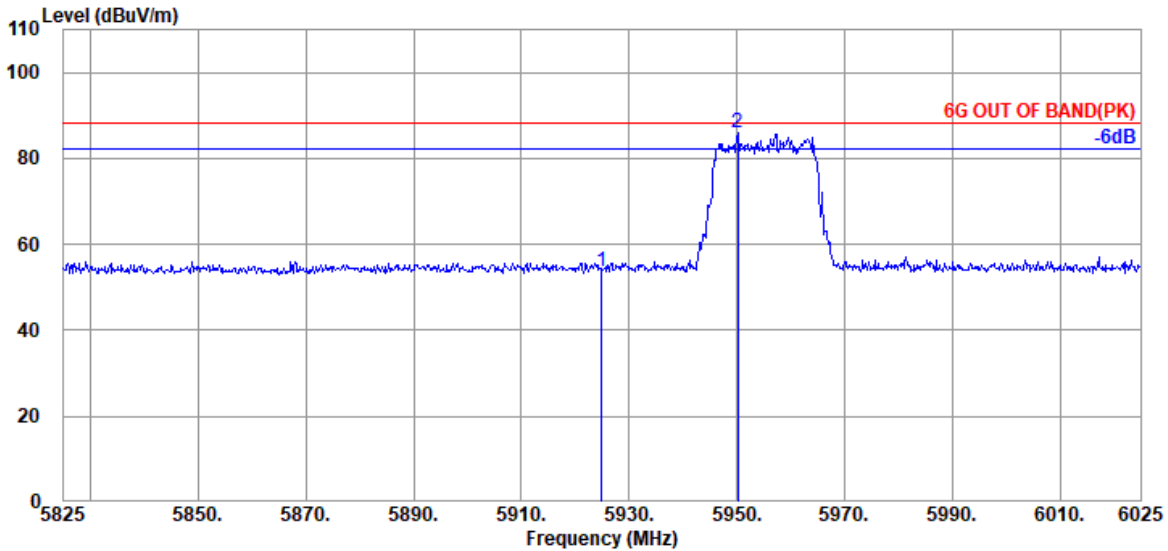

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 49.59             | 53.77                   | 88.20           | 34.43       | Peak     |
| @ 5950.200               | 34.30                 | 9.30            | 39.35            | 81.90             | 86.15                   | ---             | ---         | Peak     |

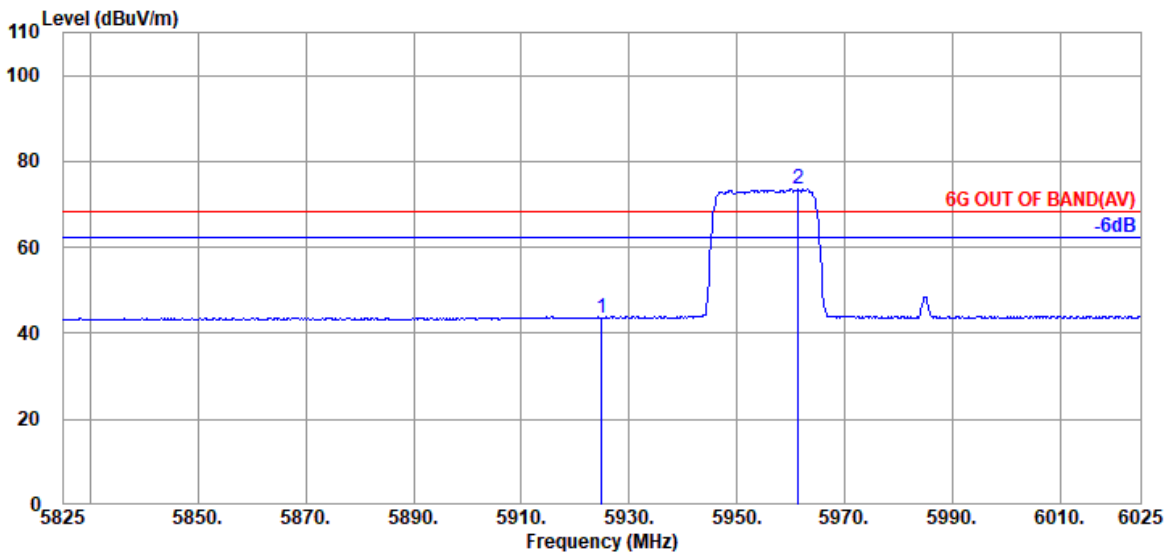


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 39.45             | 43.63                   | 68.20           | 24.57       | Average  |
| @ 5961.400               | 34.27                 | 9.31            | 39.35            | 69.32             | 73.55                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

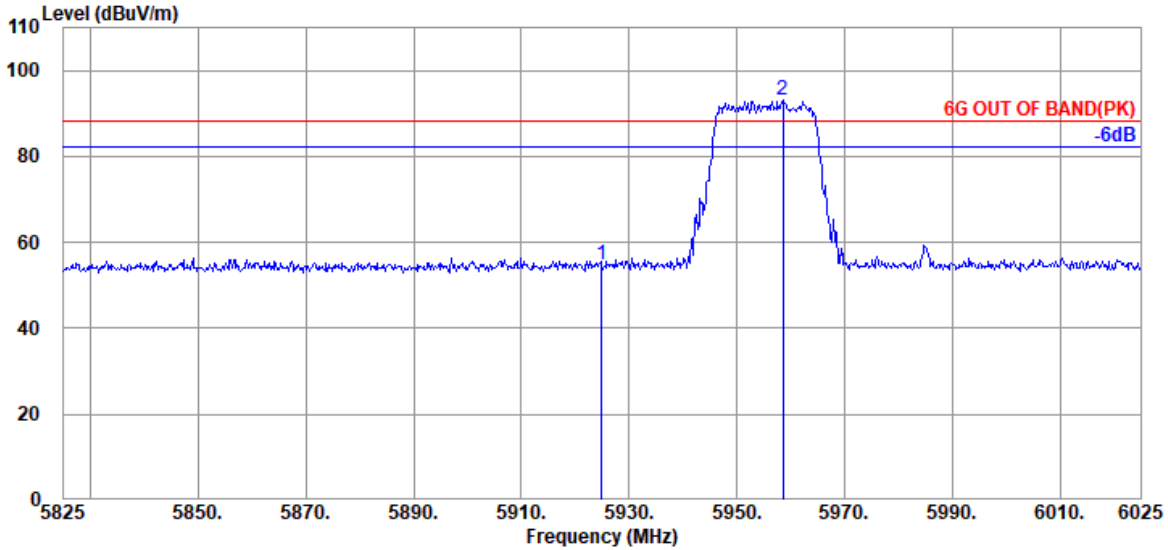

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 50.74             | 54.92                   | 88.20           | 33.28       | Peak     |
| @ 5958.600               | 34.27                 | 9.31            | 39.35            | 88.72             | 92.95                   | ---             | ---         | Peak     |

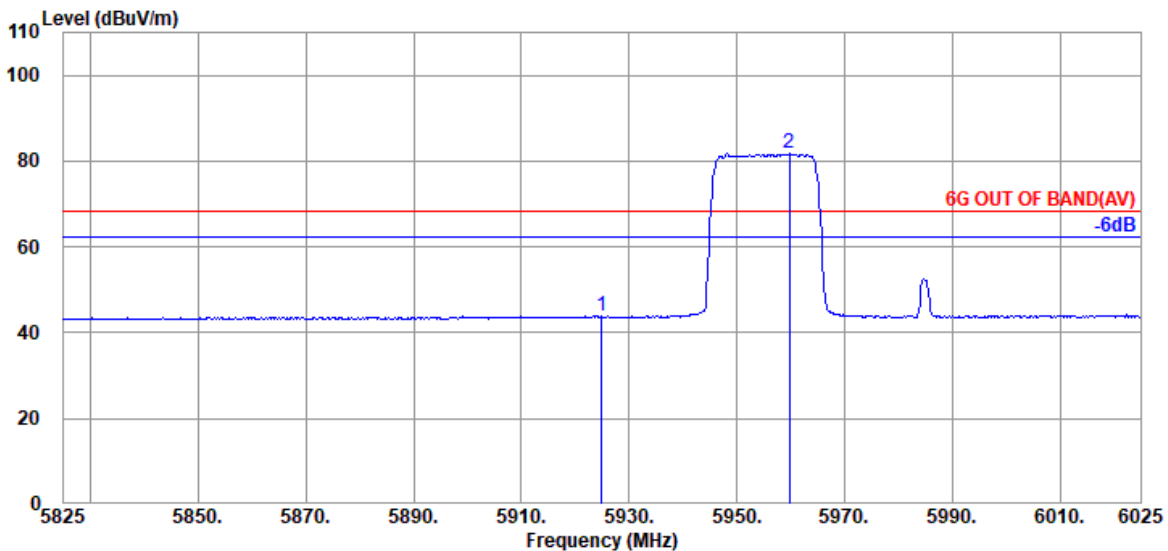

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 39.59             | 43.77                   | 68.20           | 24.43       | Average  |
| @ 5959.800               | 34.27                 | 9.31            | 39.35            | 77.66             | 81.89                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

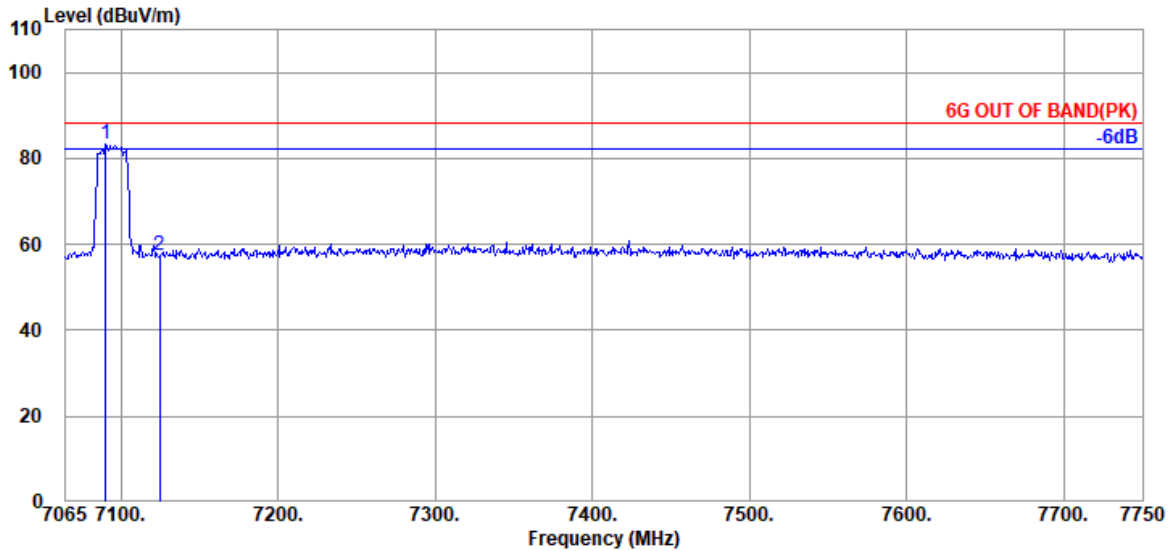

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7090.345                 | 35.80                 | 9.80            | 39.49            | 77.09             | 83.20                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.13             | 57.32                   | 88.20           | 30.88       | Peak     |

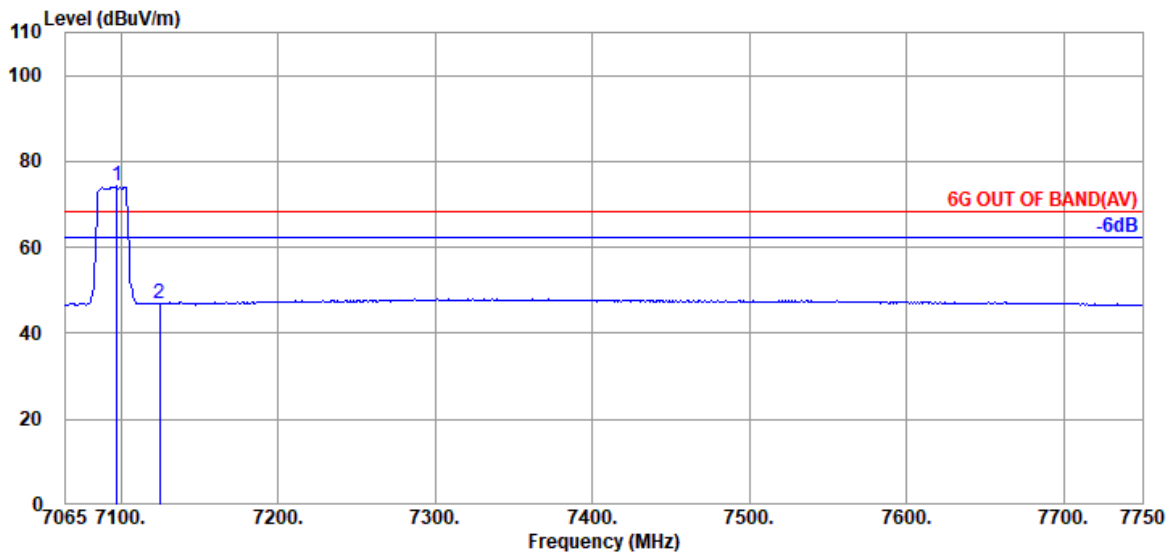

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7097.880                 | 35.80                 | 9.80            | 39.49            | 68.06             | 74.17                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.67             | 46.86                   | 68.20           | 21.34       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

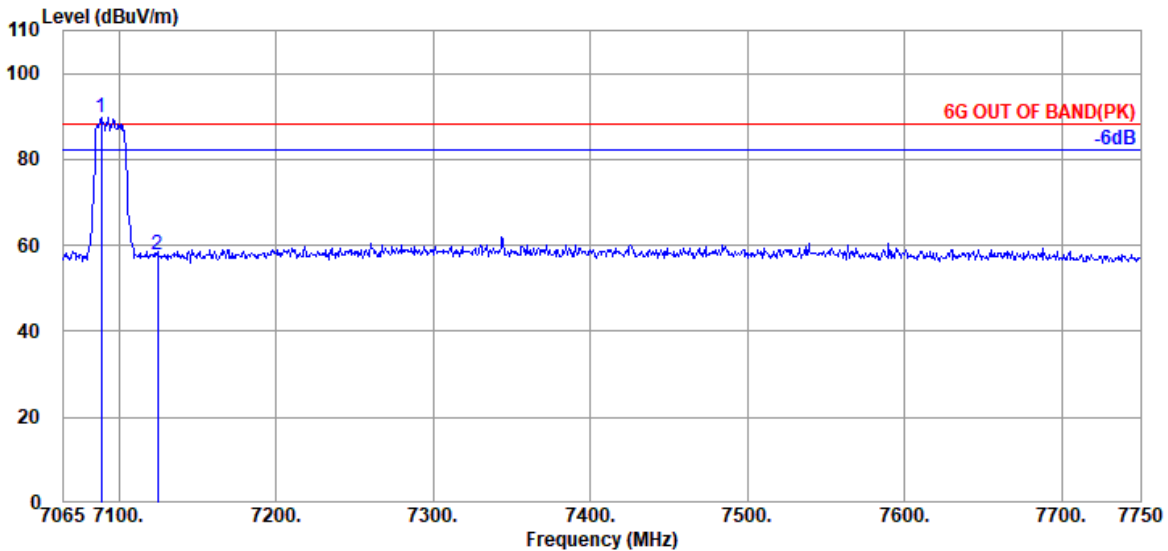

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7088.975               | 35.80                 | 9.80            | 39.49            | 83.61             | 89.72                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.75             | 57.94                   | 88.20           | 30.26       | Peak     |

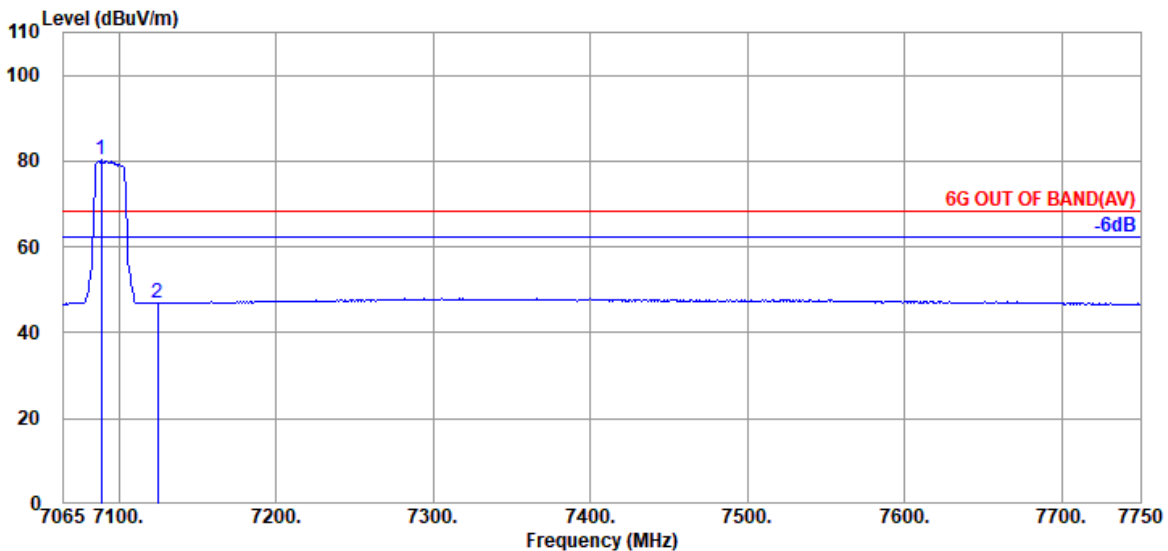

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7088.975               | 35.80                 | 9.80            | 39.49            | 74.08             | 80.19                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.74             | 46.93                   | 68.20           | 21.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

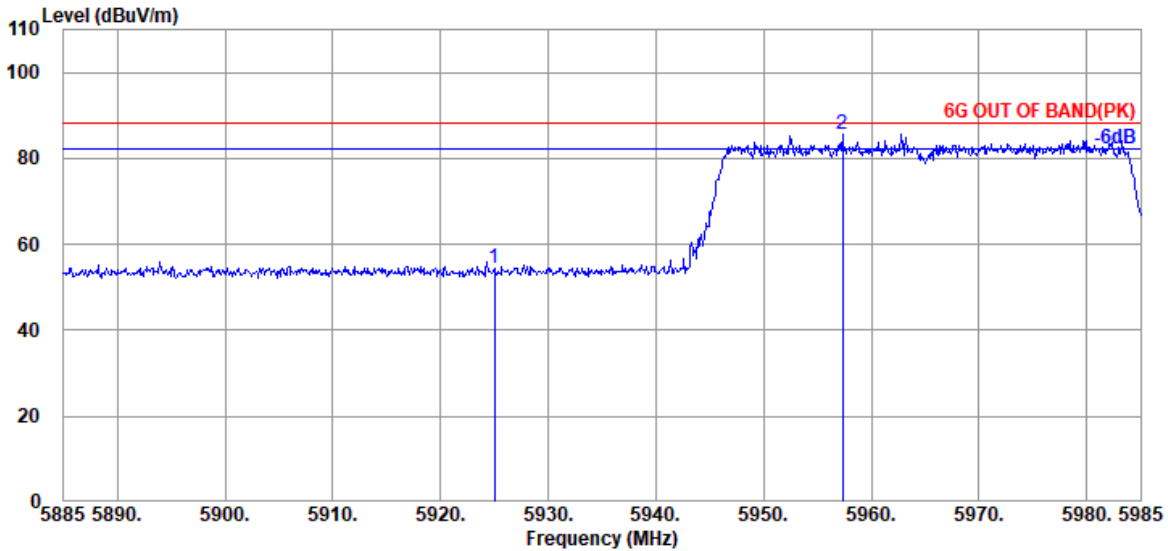

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 50.27             | 54.45                   | 88.20           | 33.75       | Peak     |
| @ 5957.300               | 34.30                 | 9.30            | 39.35            | 81.21             | 85.46                   | ---             | ---         | Peak     |

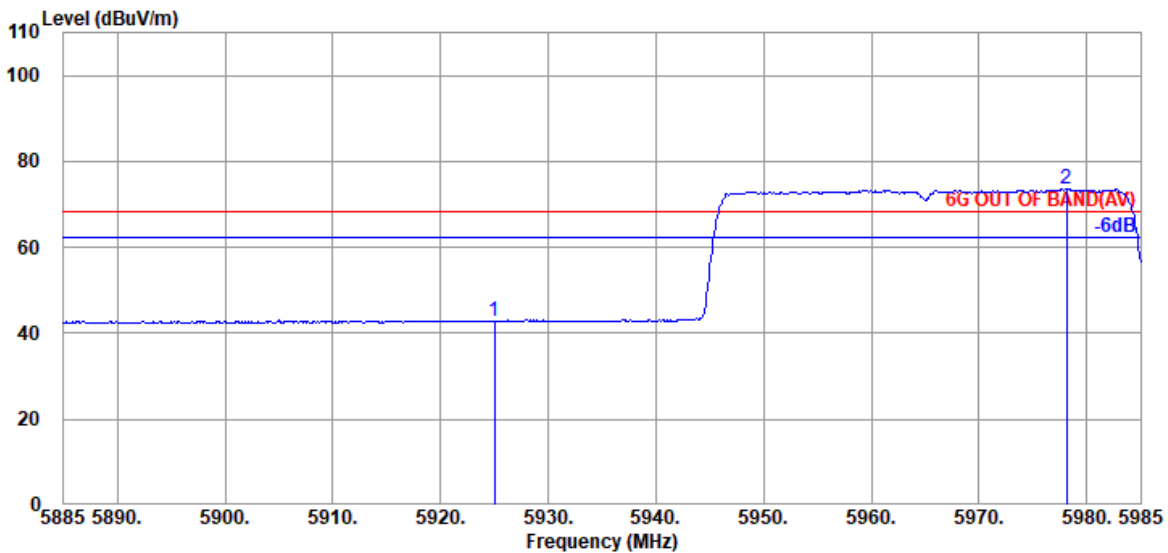


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.48             | 42.66                   | 68.20           | 25.54       | Average  |
| @ 5978.100               | 34.23                 | 9.32            | 39.36            | 69.49             | 73.68                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

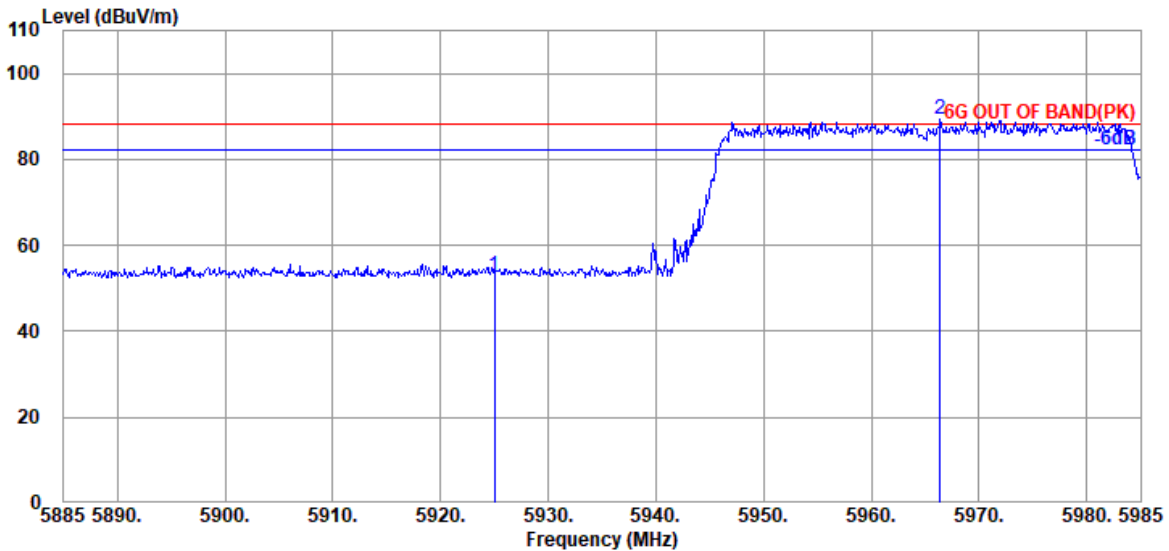

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 48.72             | 52.90                   | 88.20           | 35.30       | Peak     |
| @ 5966.400               | 34.27                 | 9.31            | 39.35            | 85.17             | 89.40                   | ---             | ---         | Peak     |

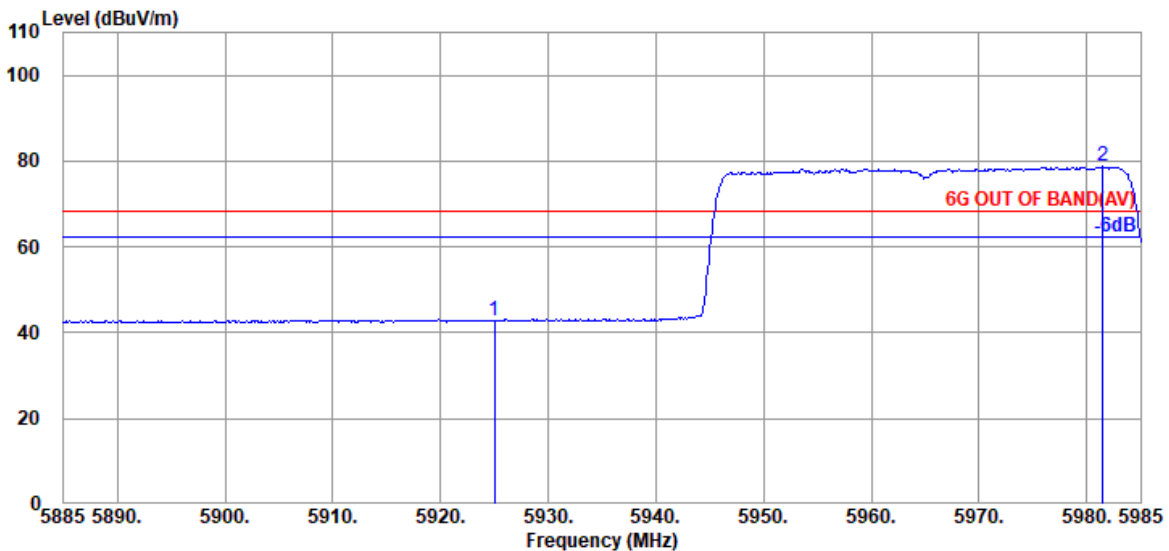

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 38.71             | 42.89                   | 68.20           | 25.31       | Average  |
| @ 5981.500               | 34.23                 | 9.32            | 39.36            | 74.46             | 78.65                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

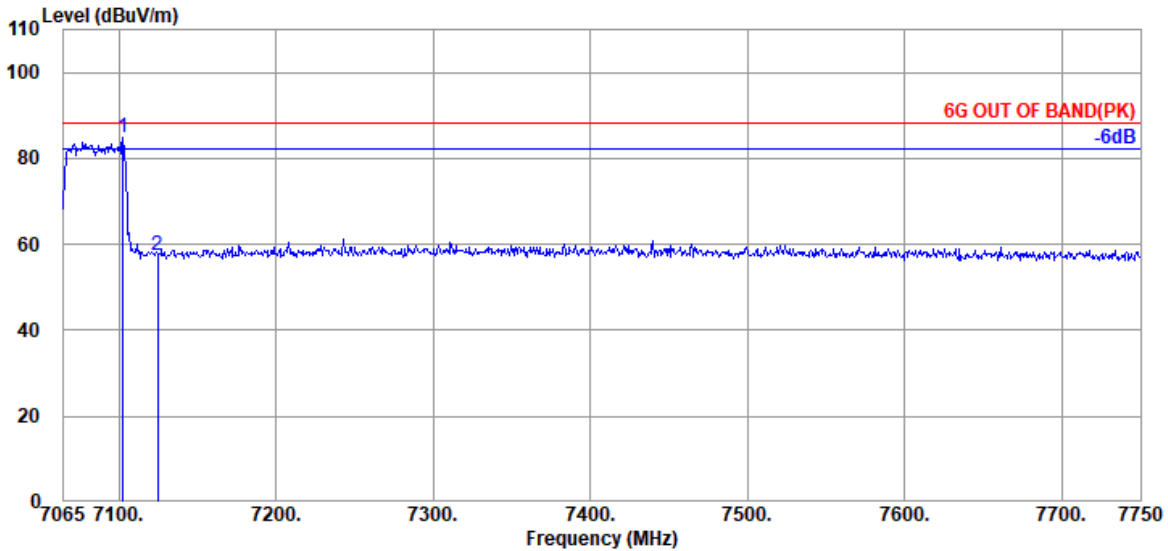

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7102.675               | 35.80                 | 9.80            | 39.49            | 78.83             | 84.94                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.19             | 57.38                   | 88.20           | 30.82       | Peak     |

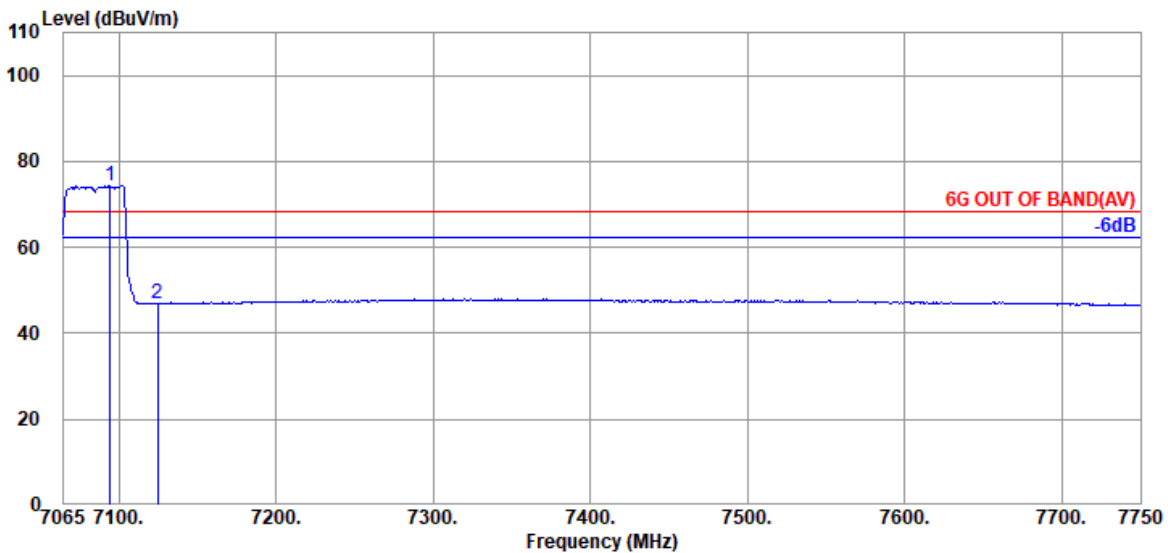

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7094.455               | 35.80                 | 9.80            | 39.49            | 68.25             | 74.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.65             | 46.84                   | 68.20           | 21.36       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

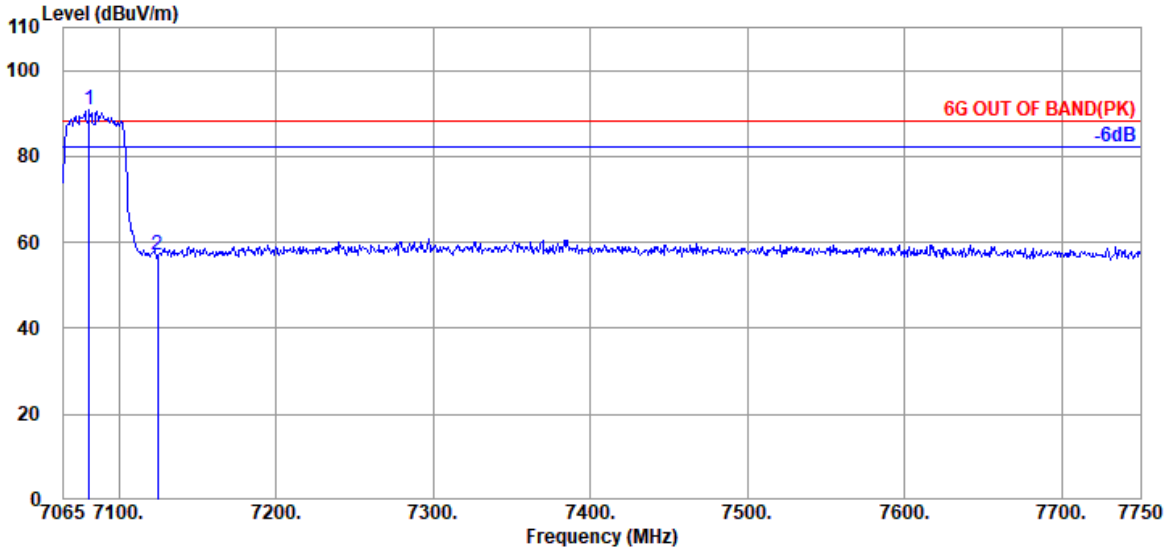

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7081.440               | 35.70                 | 9.78            | 39.49                  | 84.84             | 90.83                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 50.72             | 56.91                   | 88.20           | 31.29       | Peak     |

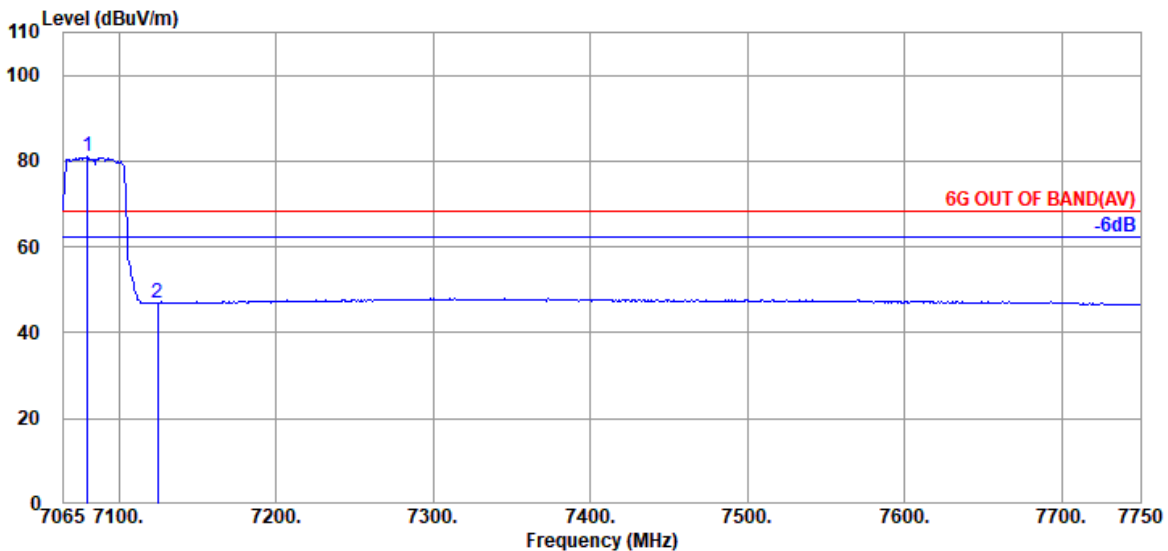

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7080.070               | 35.70                 | 9.78            | 39.49                  | 75.05             | 81.04                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50                  | 40.86             | 47.05                   | 68.20           | 21.15       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

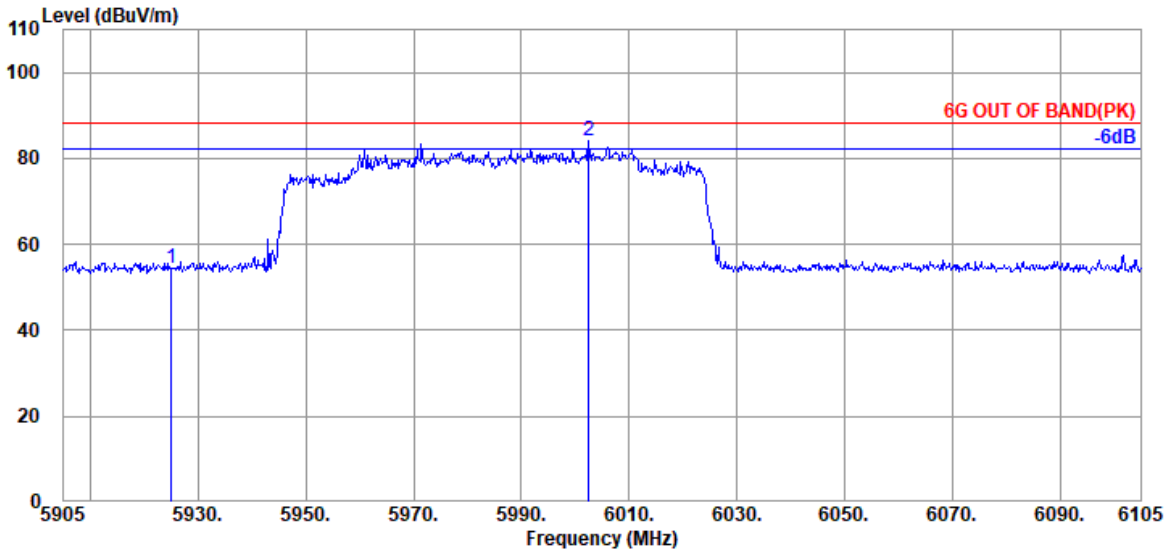

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 50.09             | 54.27                   | 88.20           | 33.93       | Peak     |
| @ 6002.600               | 34.20                 | 9.33            | 39.36            | 79.96             | 84.13                   | ---             | ---         | Peak     |

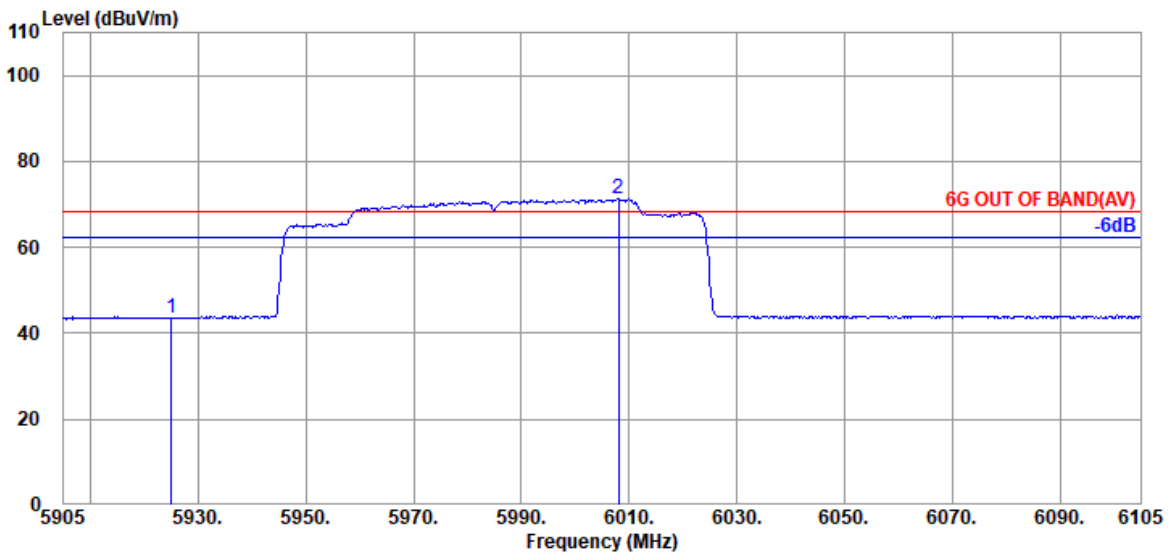

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35            | 39.42             | 43.60                   | 68.20           | 24.60       | Average  |
| @ 6008.000               | 34.20                 | 9.33            | 39.36            | 67.08             | 71.25                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

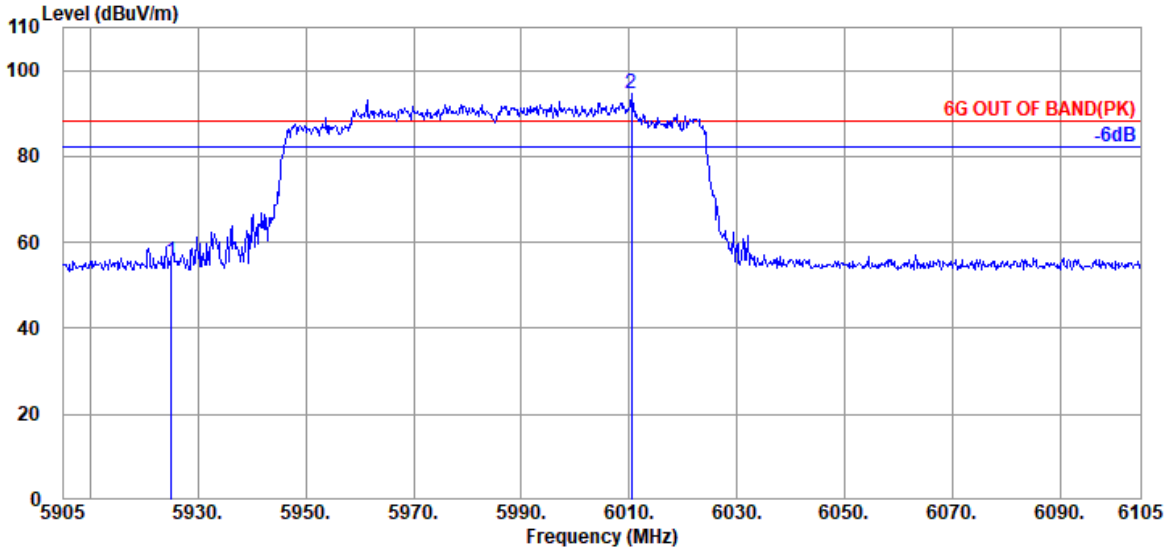

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 51.35             | 55.53                   | 88.20           | 32.67       | Peak     |
| @ 6010.400               | 34.20                 | 9.34            | 39.36                  | 90.51             | 94.69                   | ---             | ---         | Peak     |

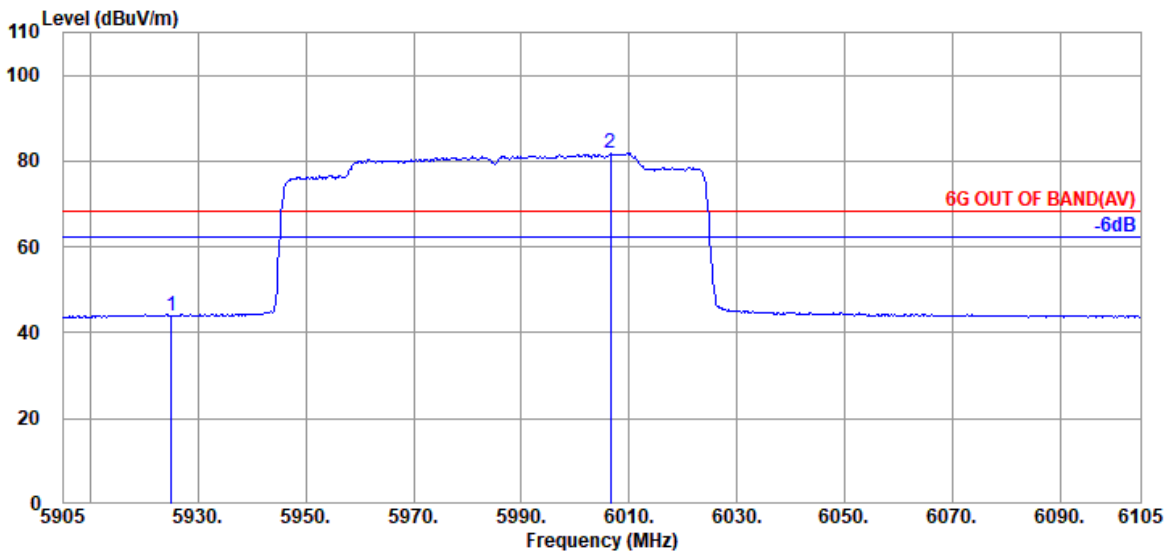

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.23                 | 9.30            | 39.35                  | 39.66             | 43.84                   | 68.20           | 24.36       | Average  |
| @ 6006.600               | 34.20                 | 9.33            | 39.36                  | 77.73             | 81.90                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

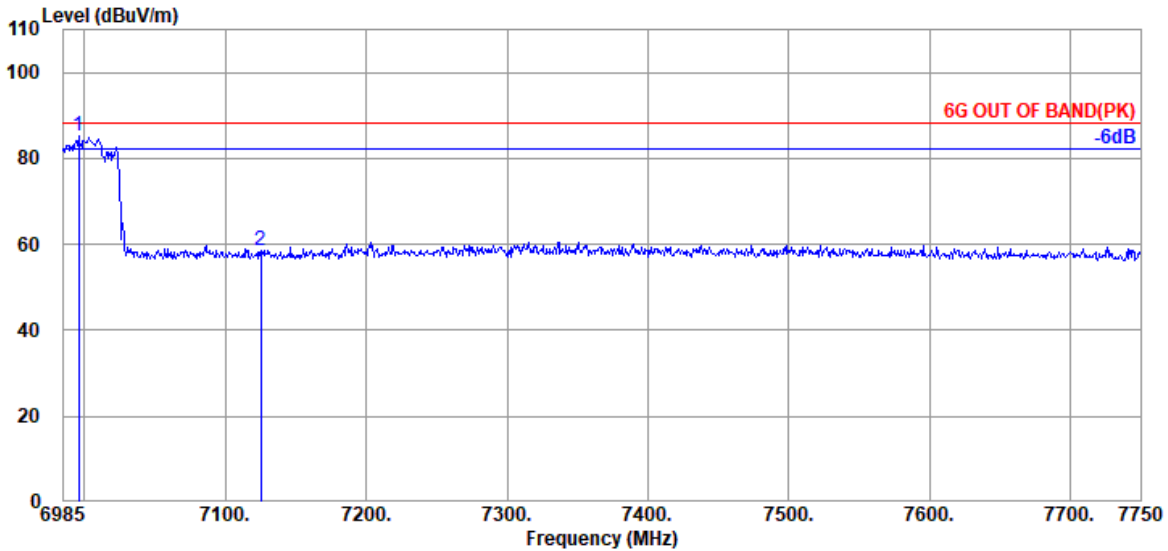

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 6995.710                 | 35.50                 | 9.71            | 39.47            | 79.42             | 85.16                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 52.33             | 58.52                   | 88.20           | 29.68       | Peak     |

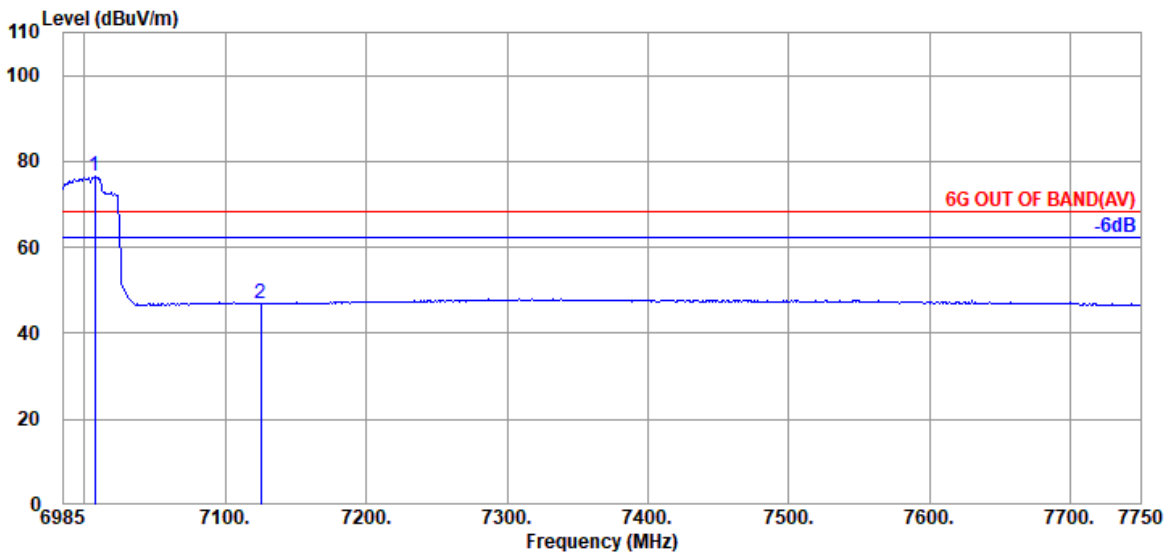


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7007.185                 | 35.53                 | 9.73            | 39.47            | 70.70             | 76.49                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.77             | 46.96                   | 68.20           | 21.24       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

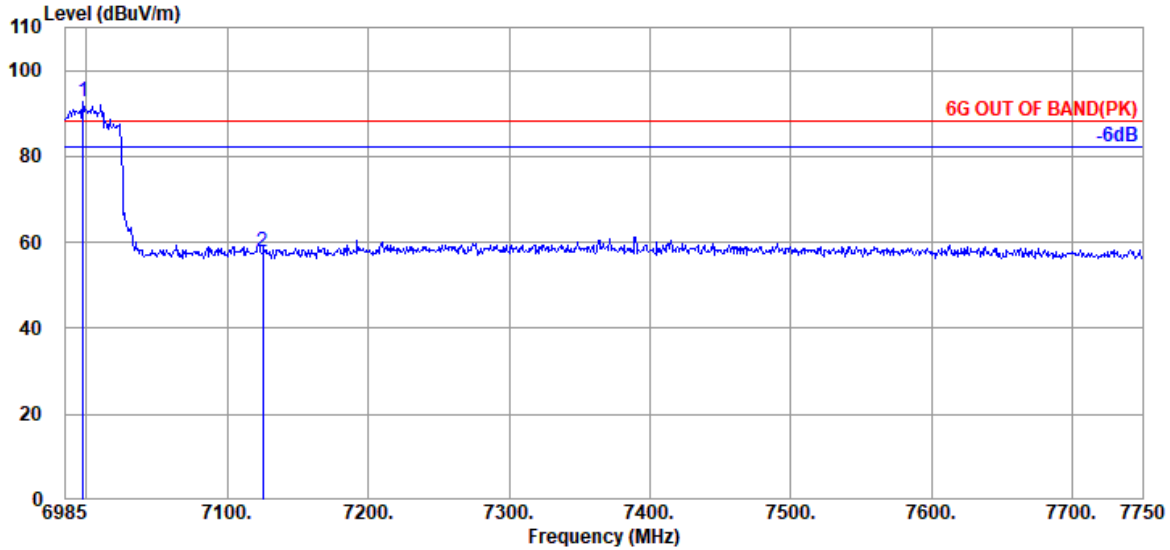

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6997.240               | 35.50                 | 9.71            | 39.47            | 86.96             | 92.70                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 51.52             | 57.71                   | 88.20           | 30.49       | Peak     |

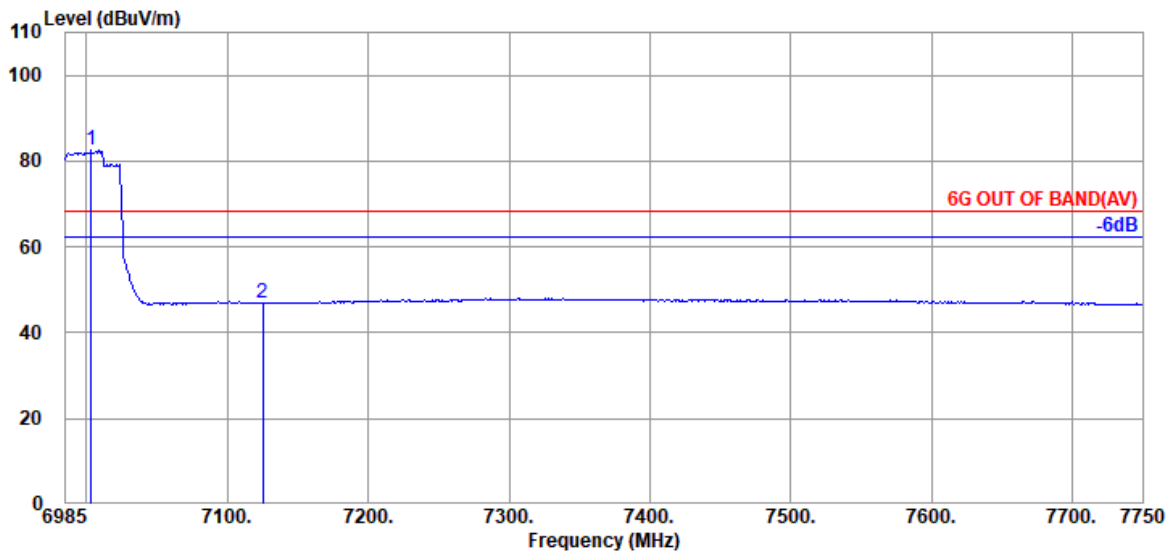


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.360               | 35.50                 | 9.71            | 39.47            | 76.75             | 82.49                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 40.87             | 47.06                   | 68.20           | 21.14       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.


- Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

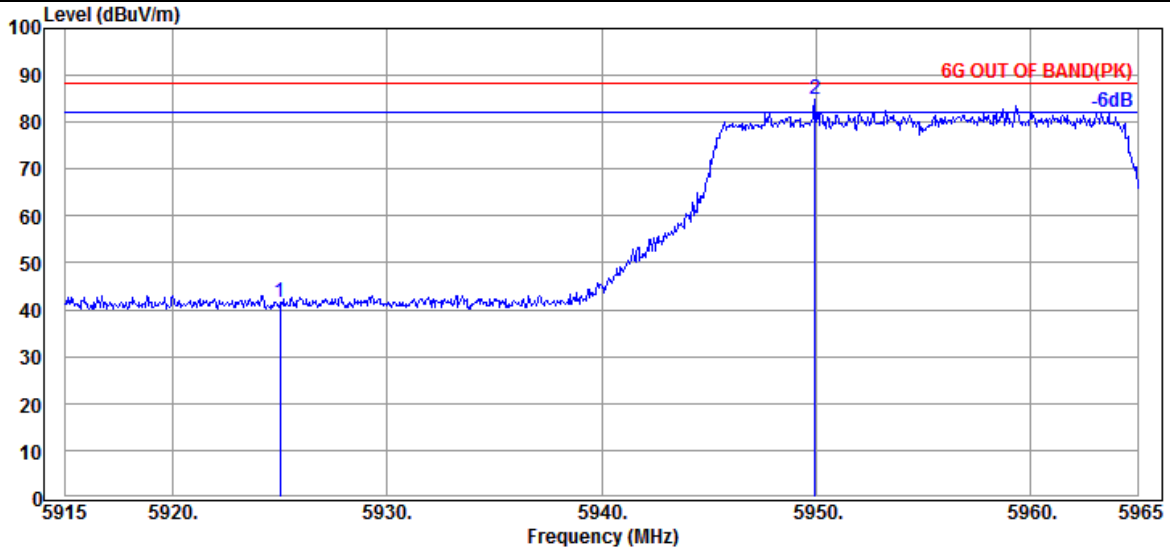

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 30.81             | 41.44                   | 88.20           | 46.76       | Peak     |
| @ 5949.950               | 35.70                 | 9.30            | 34.40                  | 74.18             | 84.78                   | ---             | ---         | Peak     |

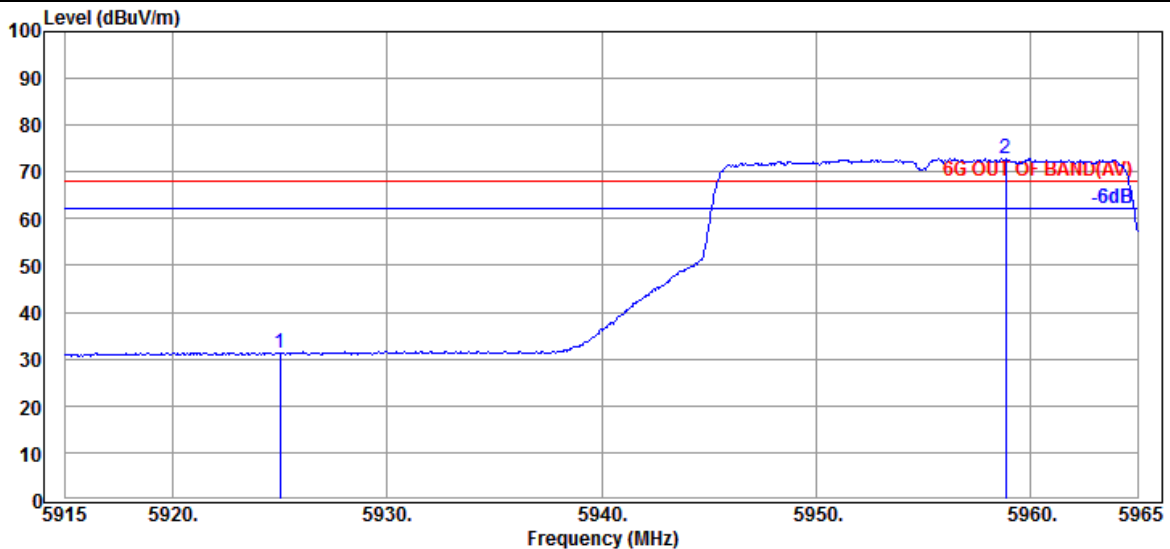


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 20.69             | 31.32                   | 68.20           | 36.88       | Average  |
| @ 5958.850               | 35.63                 | 9.31            | 34.41                  | 62.28             | 72.81                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

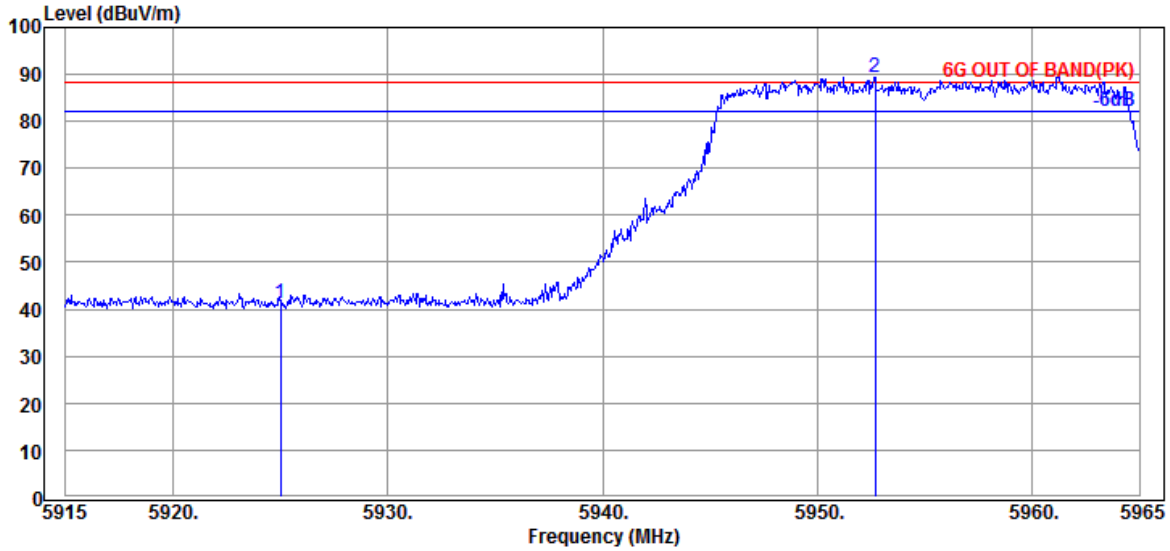

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 30.76             | 41.39                   | 88.20           | 46.81       | Peak     |
| @ 5952.700               | 35.70                 | 9.30            | 34.40                  | 78.89             | 89.49                   | ---             | ---         | Peak     |

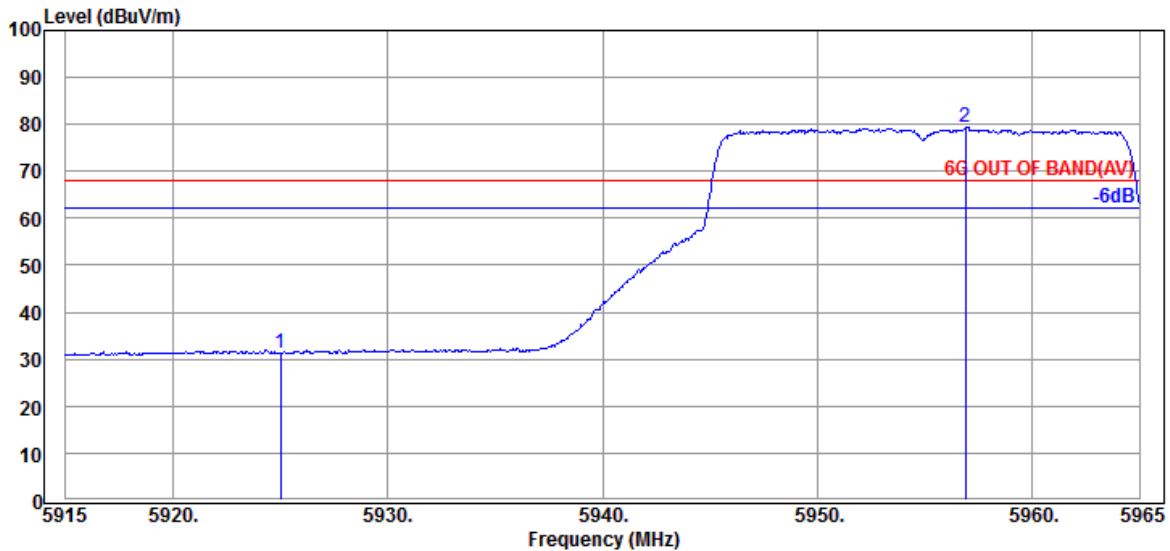


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 20.69             | 31.32                   | 68.20           | 36.88       | Average  |
| @ 5956.900               | 35.70                 | 9.30            | 34.41                  | 68.75             | 79.34                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

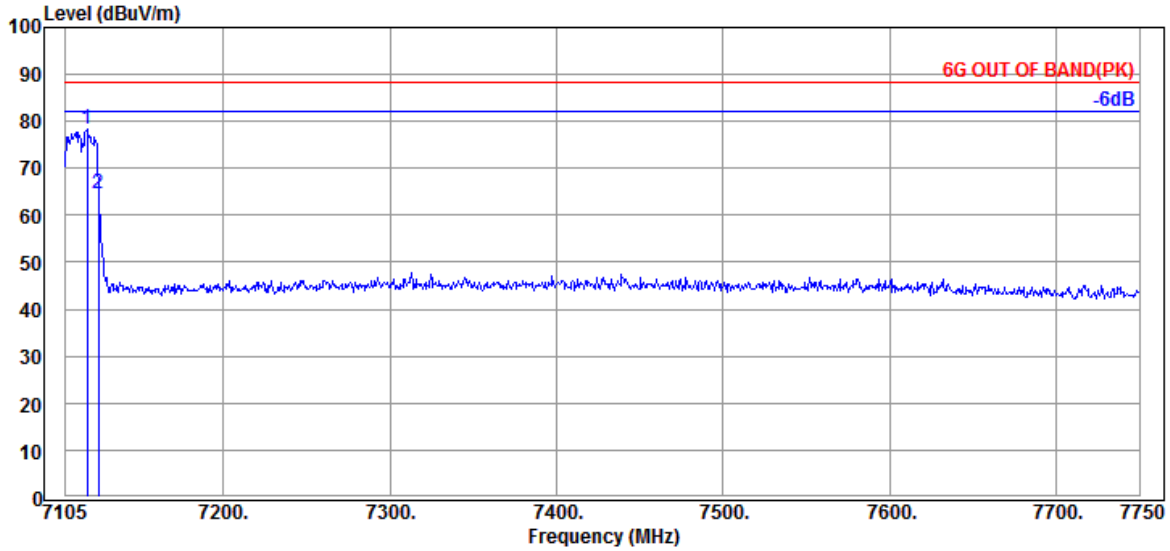

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7117.900               | 35.57                 | 9.82            | 34.55            | 67.48             | 78.32                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 53.79             | 64.63                   | 88.20           | 23.57       | Peak     |

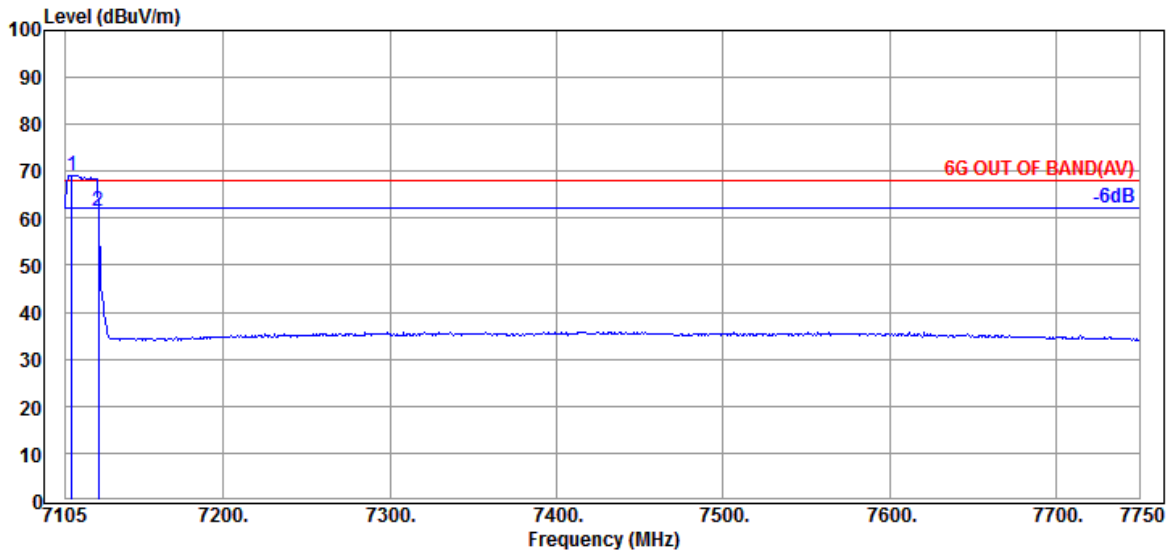


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7108.870               | 35.57                 | 9.82            | 34.53            | 58.33             | 69.19                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 50.64             | 61.48                   | 68.20           | 6.72        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

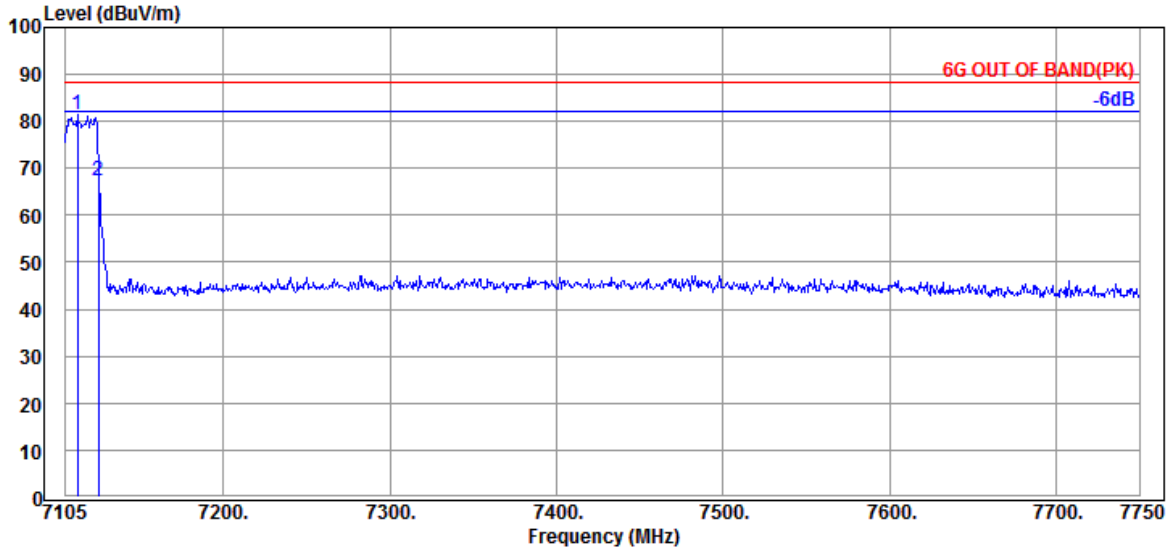

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7112.095               | 35.57                 | 9.82            | 34.55                  | 70.58             | 81.42                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 56.41             | 67.25                   | 88.20           | 20.95       | Peak     |

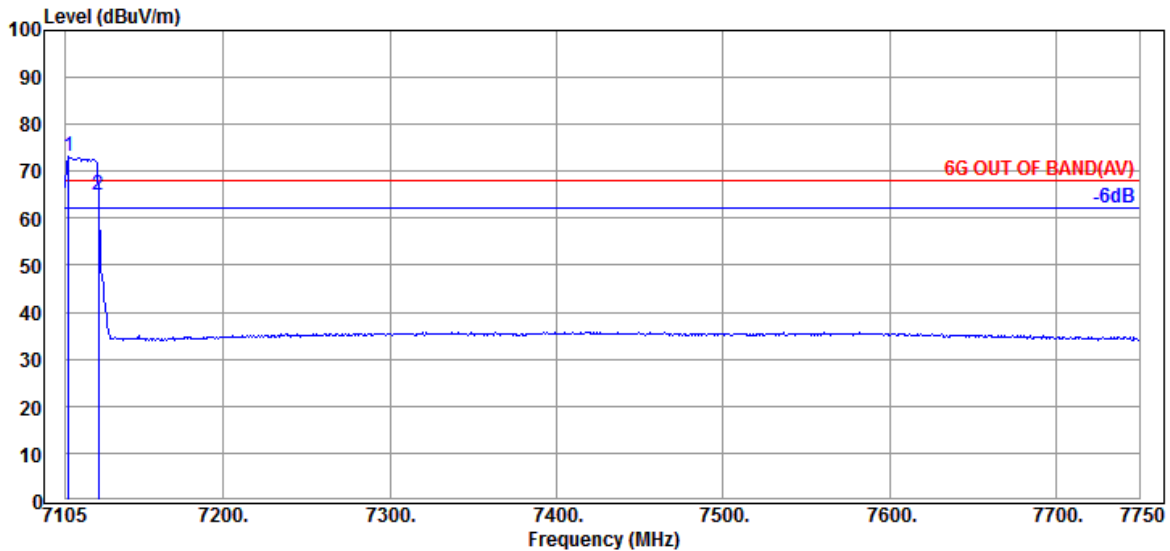


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7106.935               | 35.50                 | 9.80            | 34.53                  | 62.35             | 73.12                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 54.24             | 65.08                   | 68.20           | 3.12        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

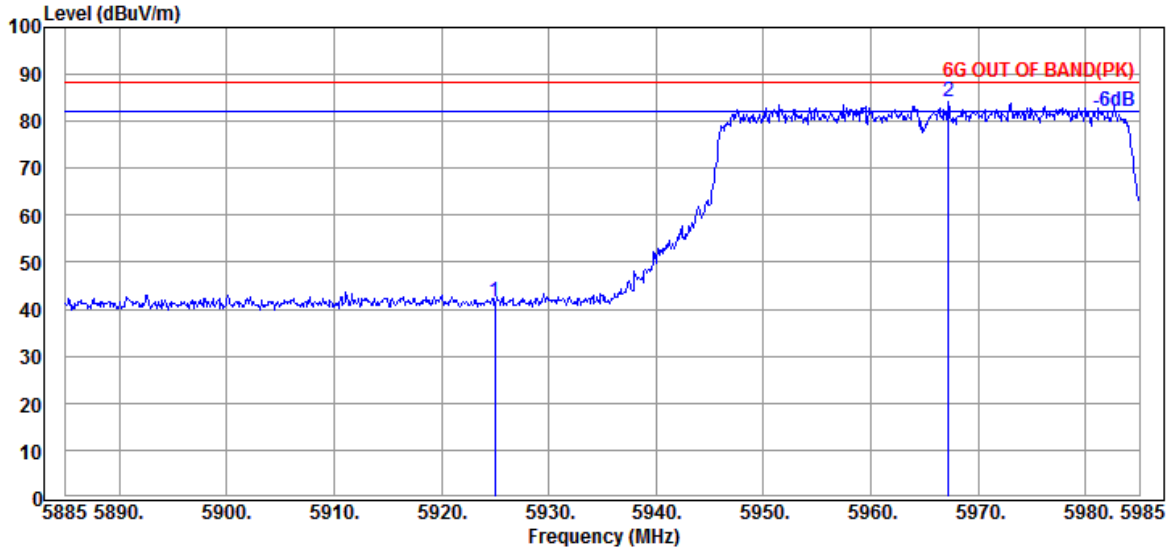

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 30.81             | 41.44                   | 88.20           | 46.76       | Peak     |
| @ 5967.200               | 35.63                 | 9.31            | 34.41            | 73.49             | 84.02                   | ---             | ---         | Peak     |

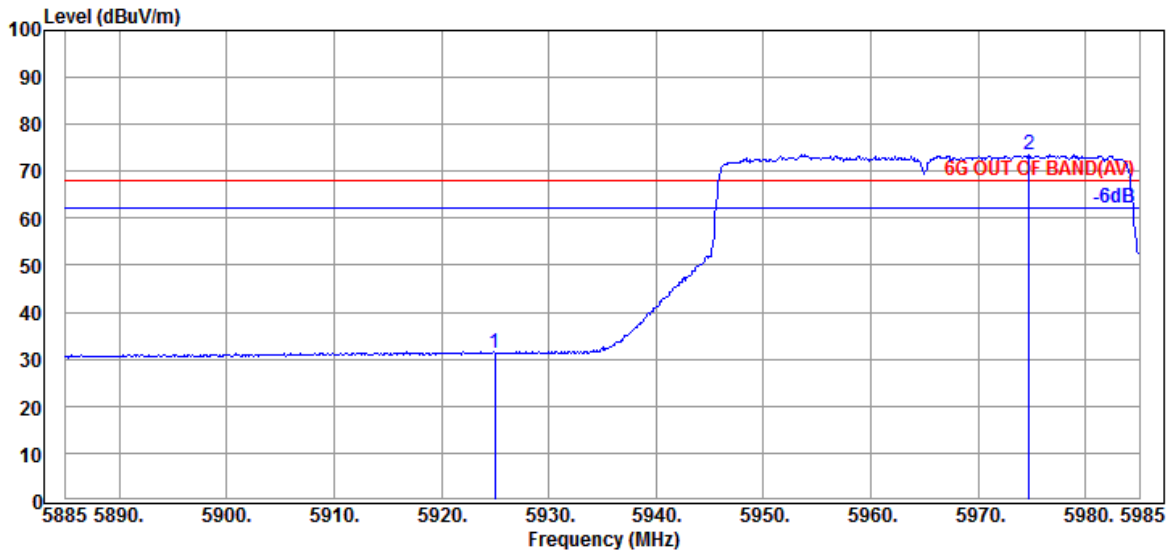


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.74             | 31.37                   | 68.20           | 36.83       | Average  |
| @ 5974.700               | 35.63                 | 9.31            | 34.41            | 63.04             | 73.57                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

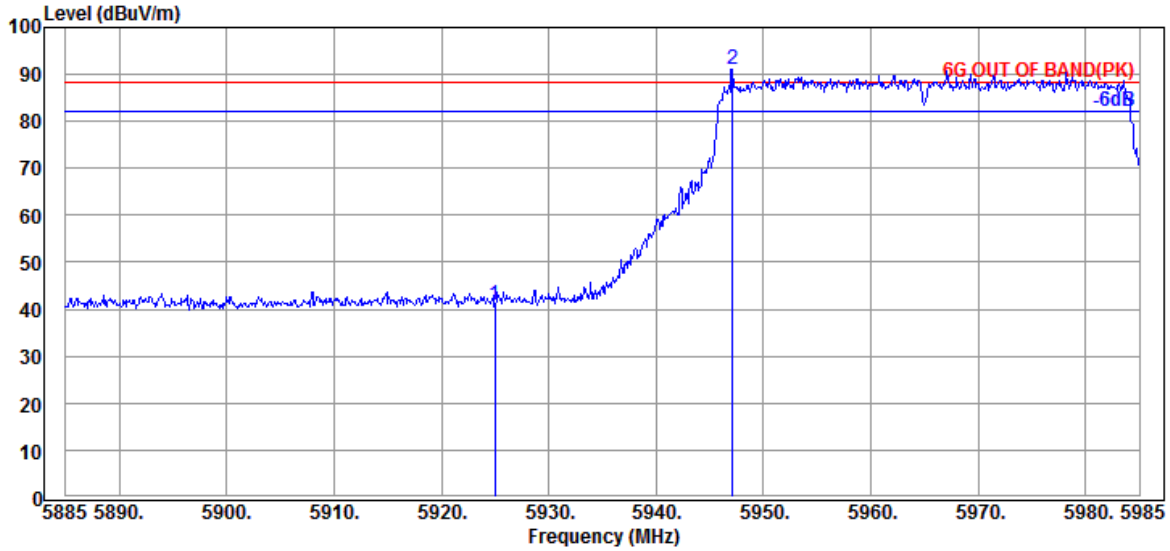

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 30.28             | 40.91                   | 88.20           | 47.29       | Peak     |
| @ 5947.100               | 35.70                 | 9.30            | 34.40                  | 80.53             | 91.13                   | ---             | ---         | Peak     |

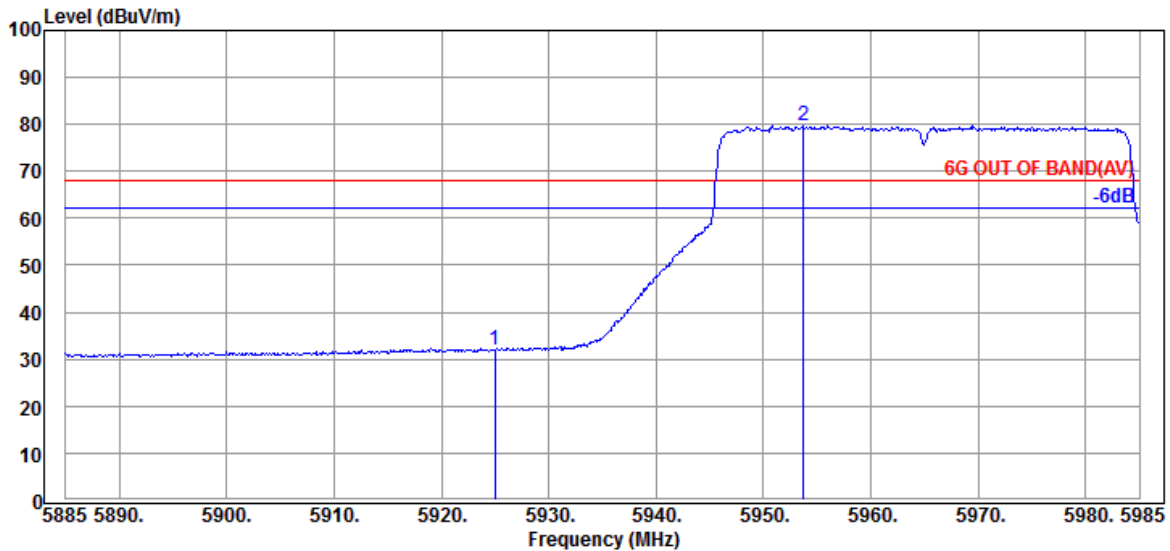


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 21.30             | 31.93                   | 68.20           | 36.27       | Average  |
| @ 5953.700               | 35.70                 | 9.30            | 34.40                  | 69.08             | 79.68                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

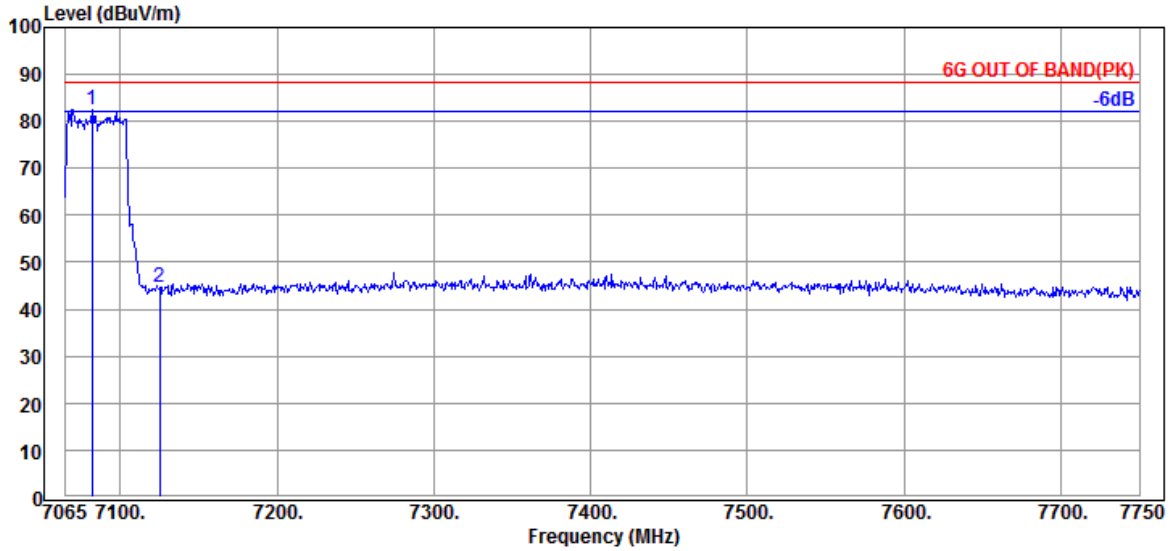

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7082.125               | 35.55                 | 9.78            | 34.52                  | 71.64             | 82.45                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.68             | 44.52                   | 88.20           | 43.68       | Peak     |

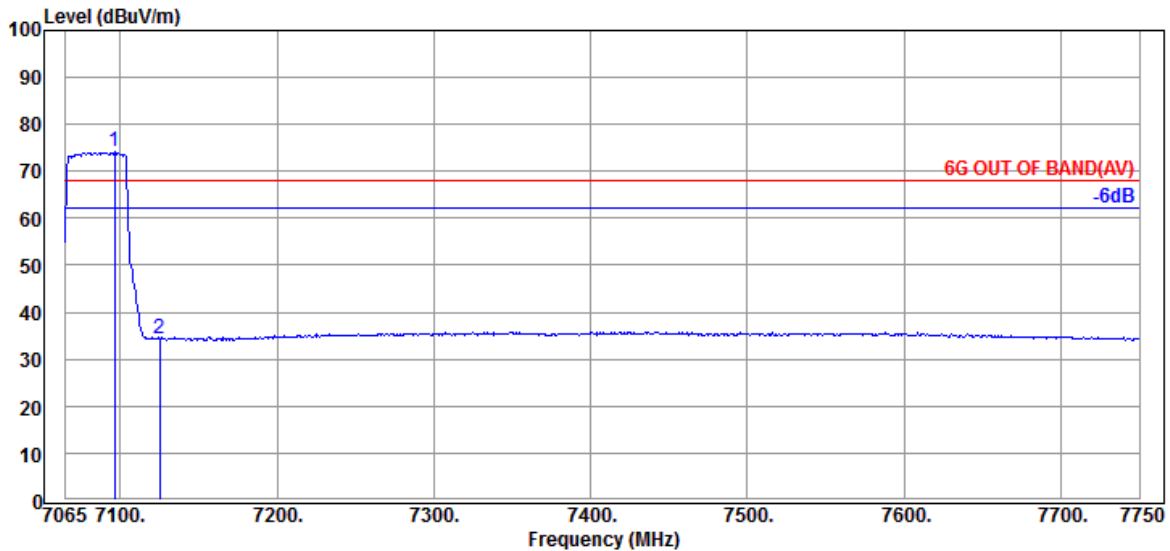


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.510               | 35.50                 | 9.80            | 34.53                  | 63.40             | 74.17                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.49             | 34.33                   | 68.20           | 33.87       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

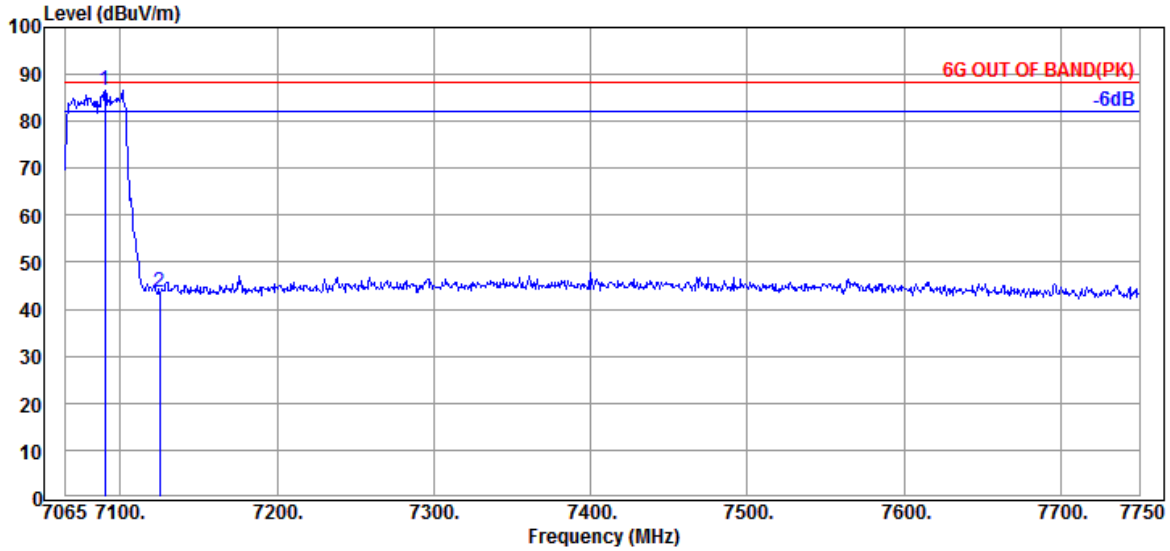

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7090.345               | 35.50                 | 9.80            | 34.53                  | 75.86             | 86.63                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 32.85             | 43.69                   | 88.20           | 44.51       | Peak     |

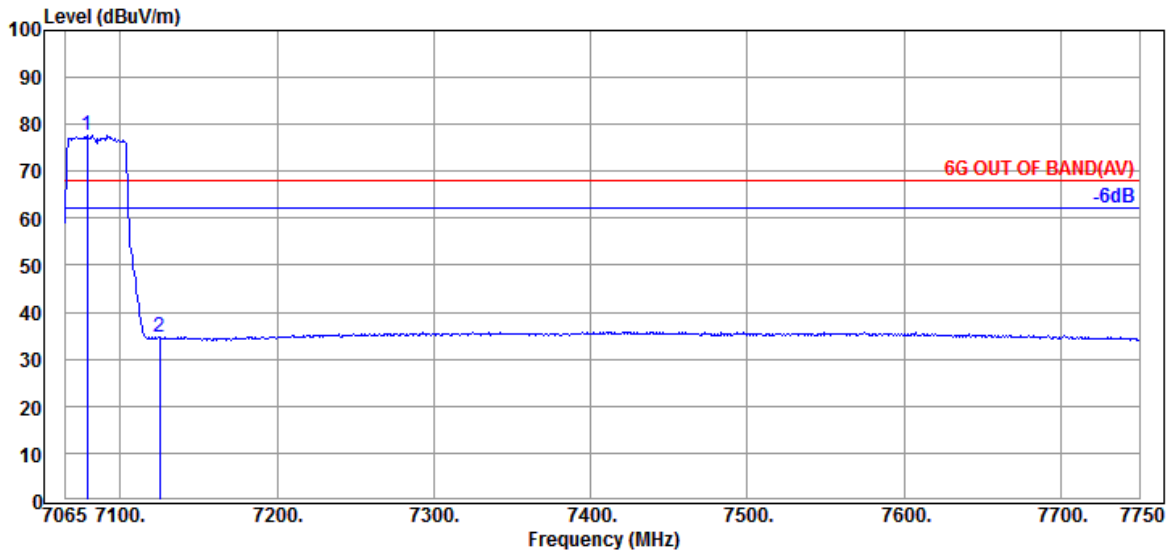


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7078.700               | 35.55                 | 9.78            | 34.52                  | 66.97             | 77.78                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.75             | 34.59                   | 68.20           | 33.61       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

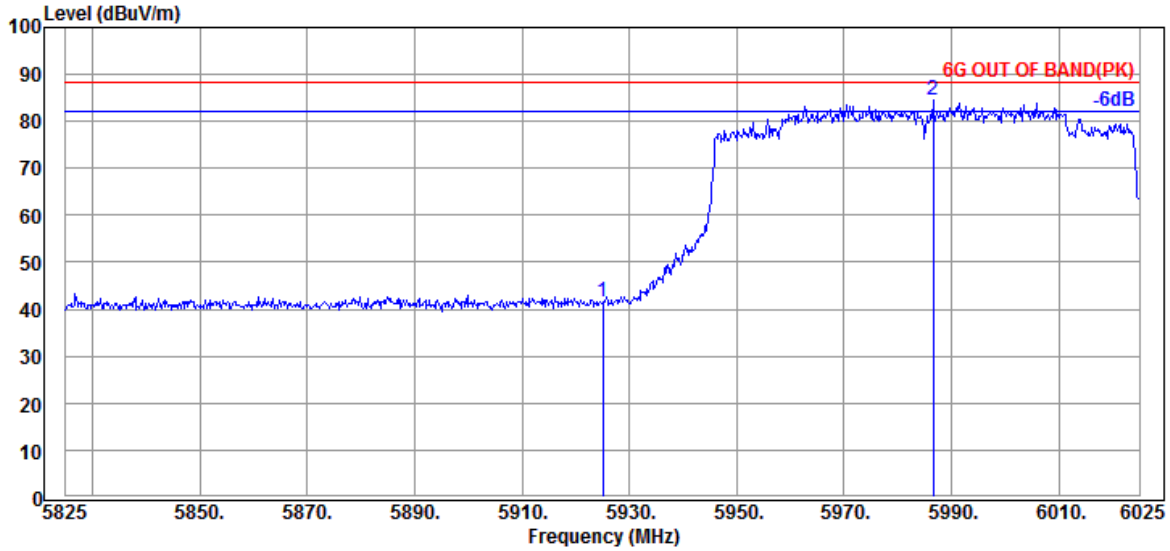

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 31.00             | 41.63                   | 88.20           | 46.57       | Peak     |
| @ 5986.600               | 35.57                 | 9.32            | 34.42            | 74.01             | 84.48                   | ---             | ---         | Peak     |

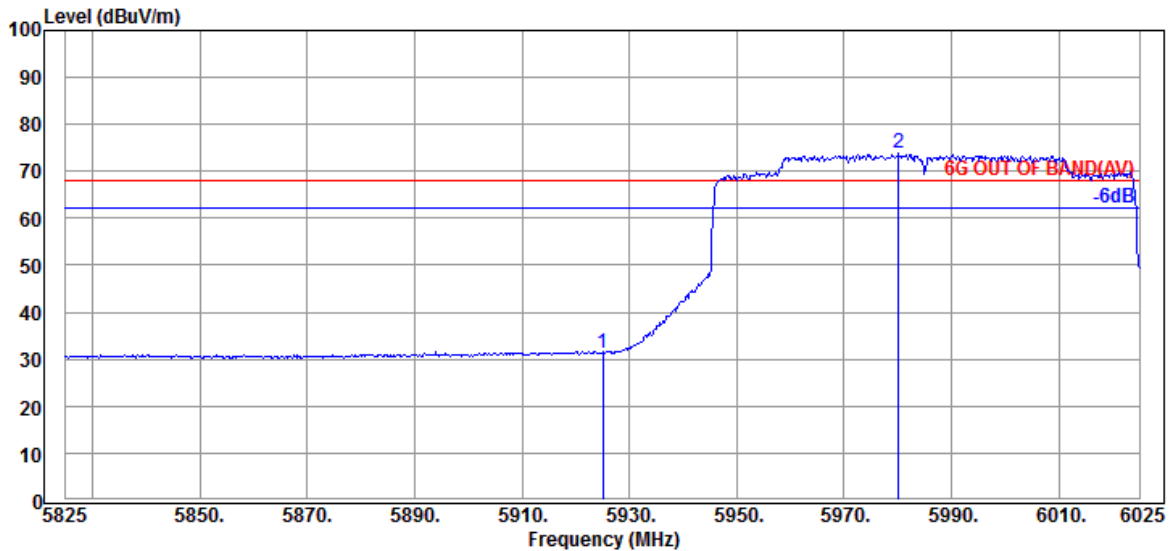


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.63             | 31.26                   | 68.20           | 36.94       | Average  |
| @ 5980.200               | 35.57                 | 9.32            | 34.42            | 63.25             | 73.72                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

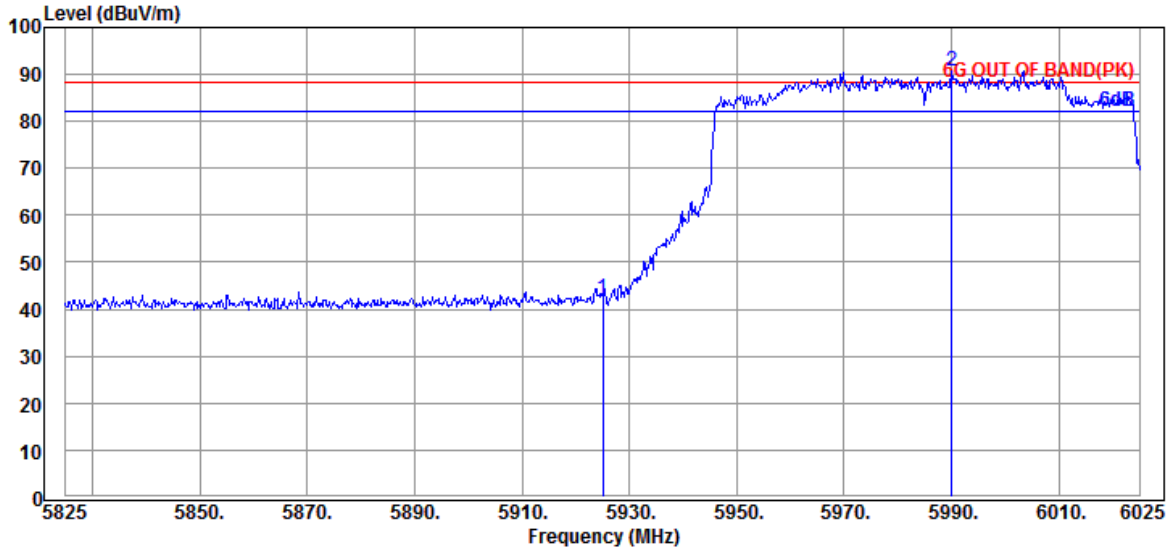

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 31.77             | 42.40                   | 88.20           | 45.80       | Peak     |
| @ 5990.000               | 35.57                 | 9.32            | 34.42                  | 80.13             | 90.60                   | ---             | ---         | Peak     |

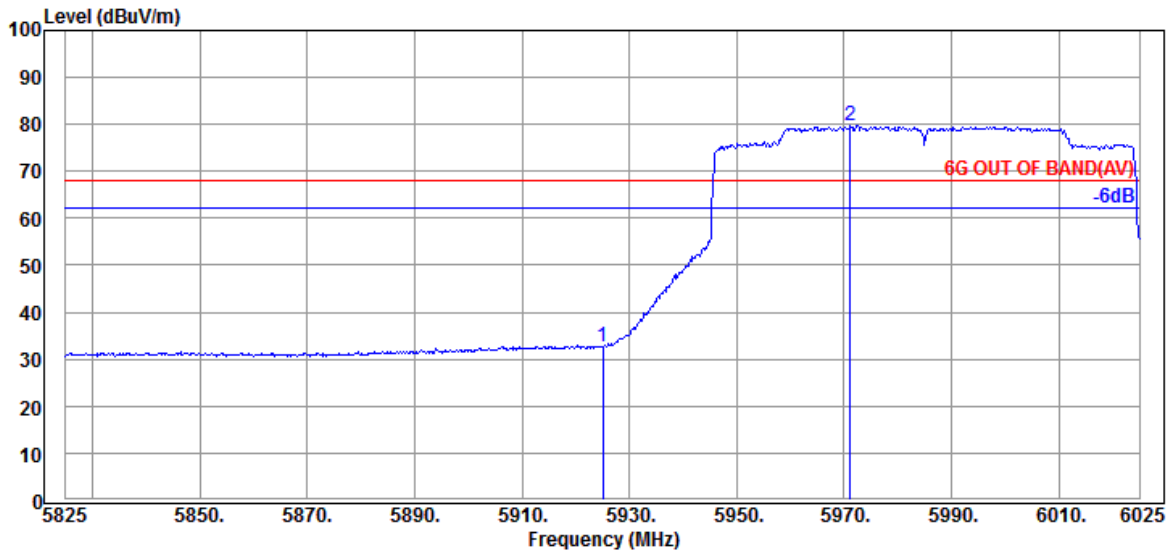


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 21.99             | 32.62                   | 68.20           | 35.58       | Average  |
| @ 5971.200               | 35.63                 | 9.31            | 34.41                  | 69.20             | 79.73                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

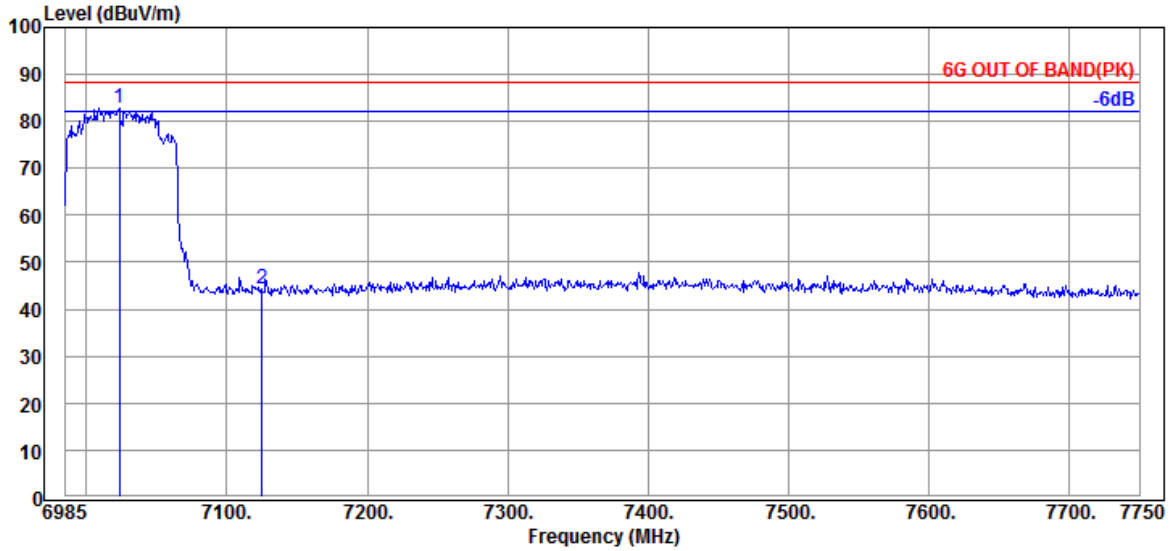

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7023.250               | 35.87                 | 9.73            | 34.49                  | 71.86             | 82.97                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.57             | 44.41                   | 88.20           | 43.79       | Peak     |

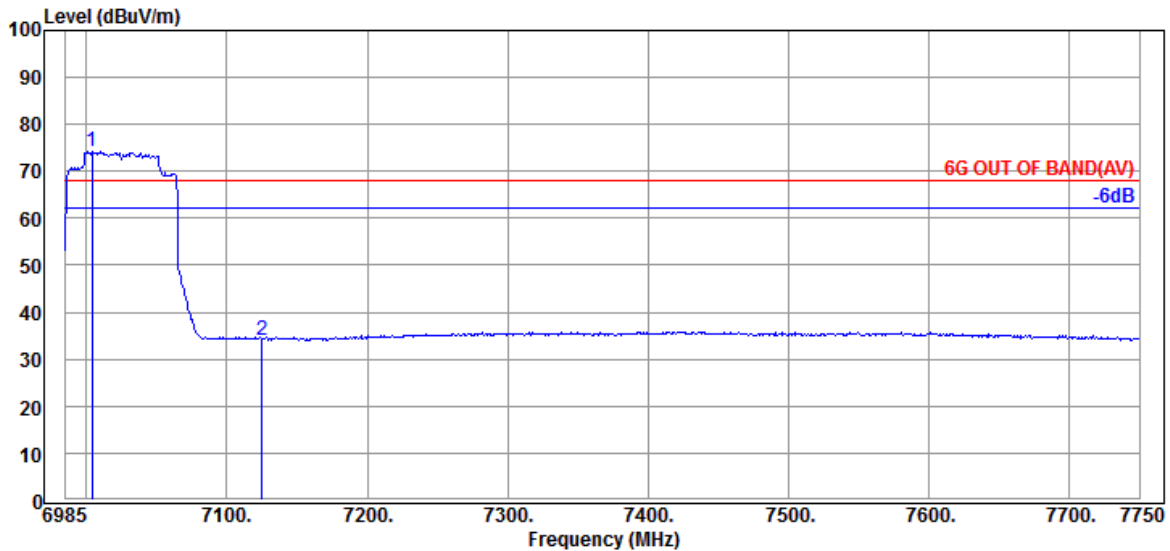


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7004.125               | 36.00                 | 9.71            | 34.48                  | 63.04             | 74.27                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.30             | 34.14                   | 68.20           | 34.06       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

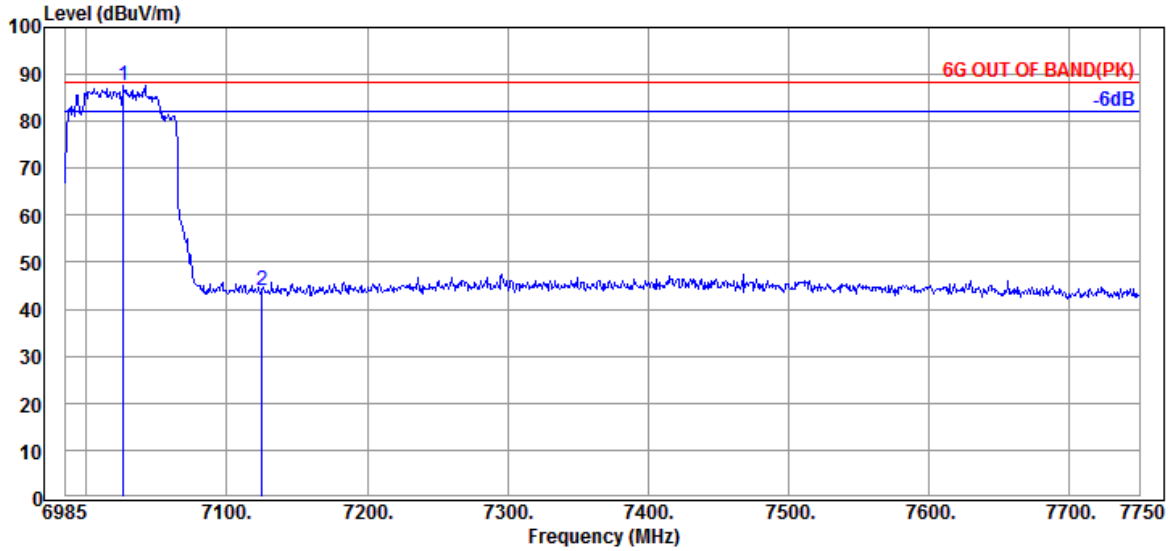

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7026.310               | 35.73                 | 9.75            | 34.49                  | 76.55             | 87.54                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 32.99             | 43.83                   | 88.20           | 44.37       | Peak     |

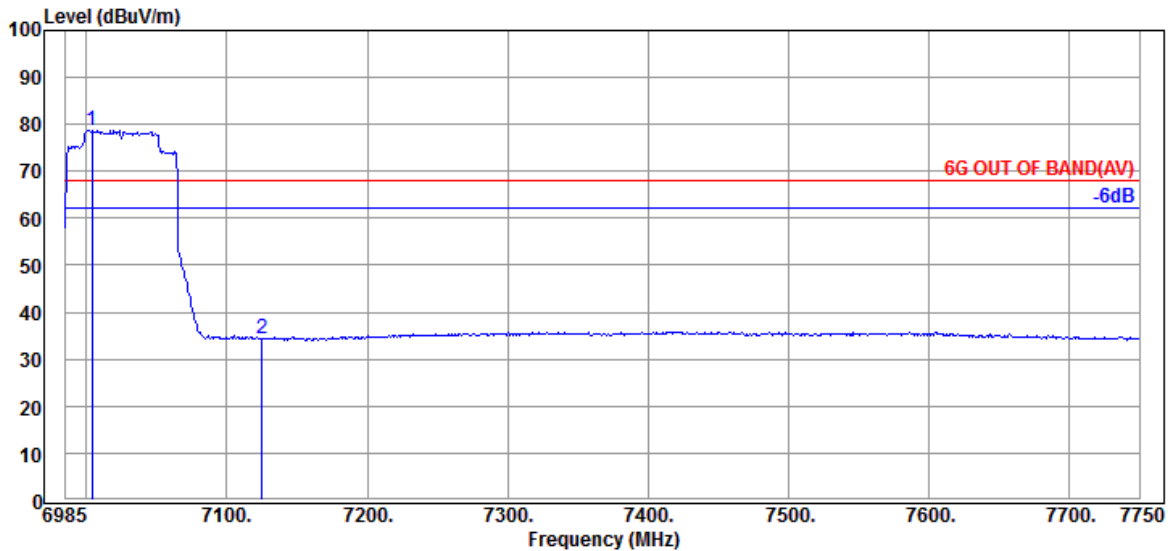


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7004.125               | 36.00                 | 9.71            | 34.48                  | 67.43             | 78.66                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.56             | 34.40                   | 68.20           | 33.80       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

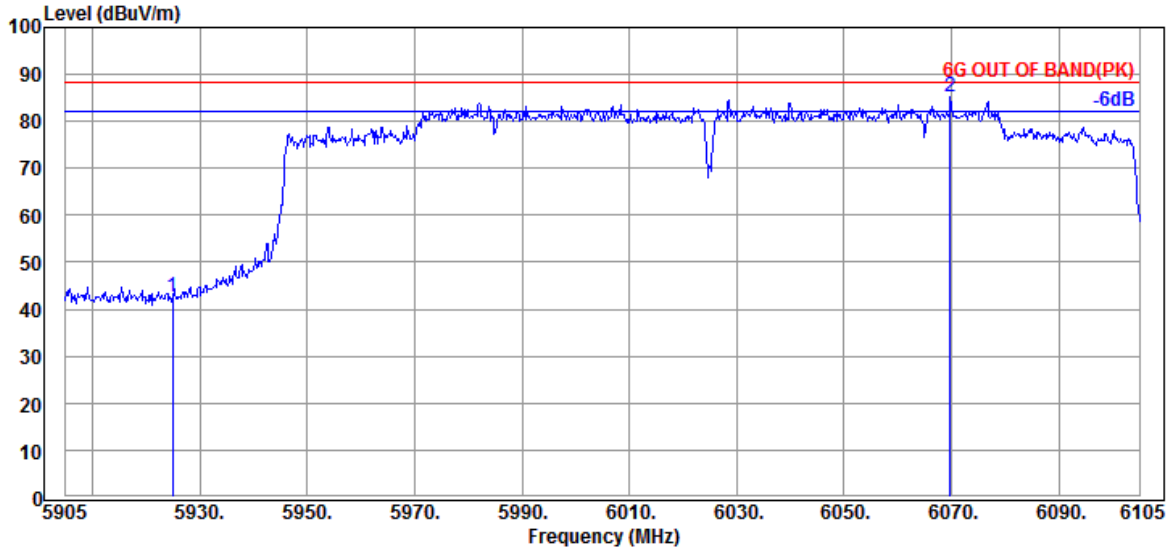

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 32.11             | 42.74                   | 88.20           | 45.46       | Peak     |
| @ 6069.800               | 35.60                 | 9.36            | 34.39                  | 74.62             | 85.19                   | ---             | ---         | Peak     |

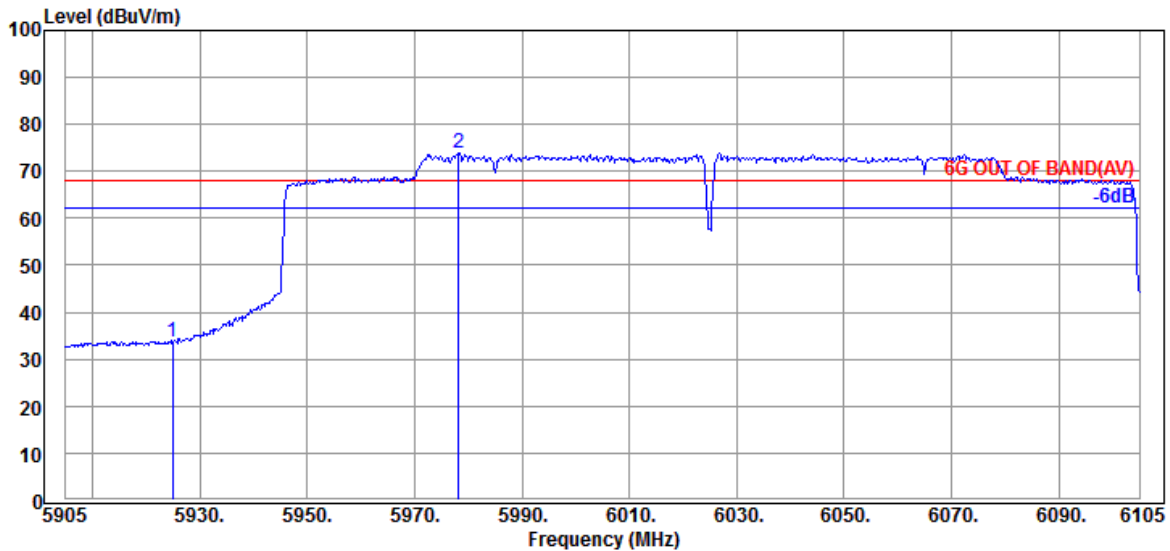


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 23.07             | 33.70                   | 68.20           | 34.50       | Average  |
| @ 5978.200               | 35.57                 | 9.32            | 34.42                  | 63.34             | 73.81                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

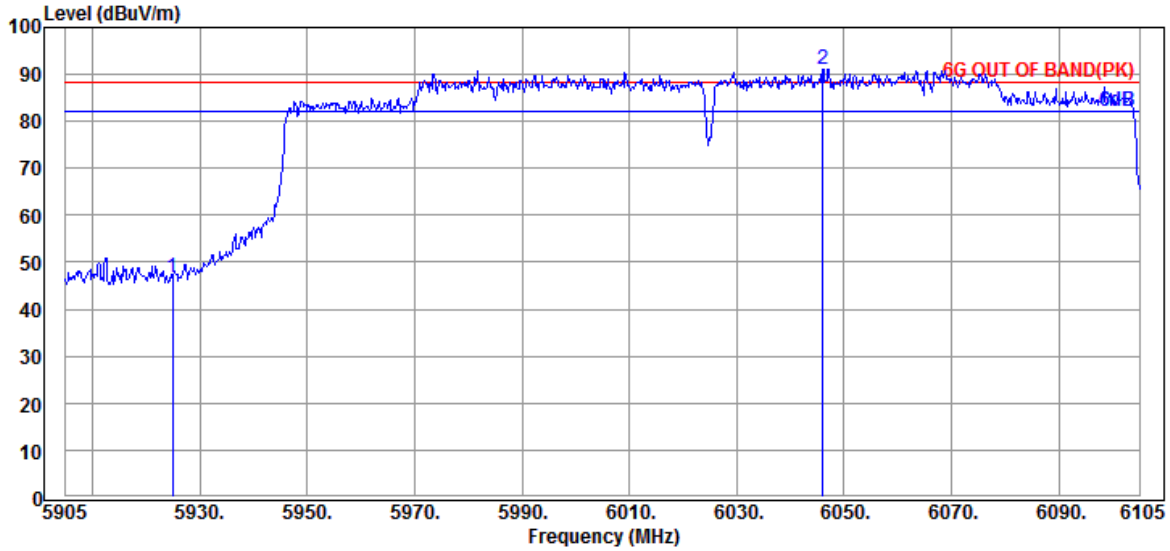

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 36.22             | 46.85                   | 88.20           | 41.35       | Peak     |
| @ 6046.000               | 35.50                 | 9.35            | 34.40                  | 80.79             | 91.24                   | ---             | ---         | Peak     |

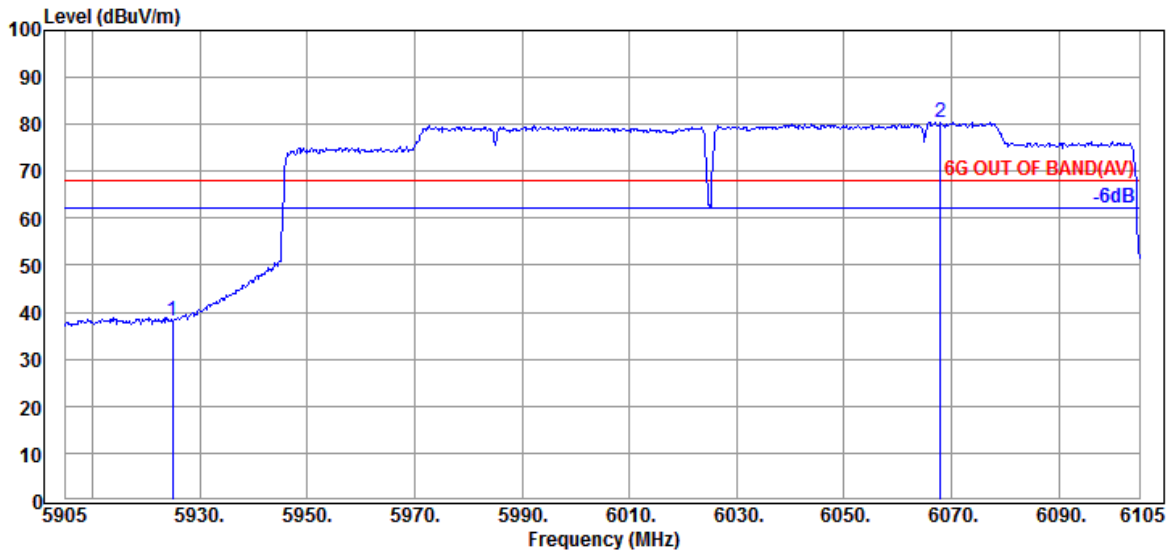


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 27.53             | 38.16                   | 68.20           | 30.04       | Average  |
| @ 6068.000               | 35.60                 | 9.36            | 34.39                  | 69.98             | 80.55                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

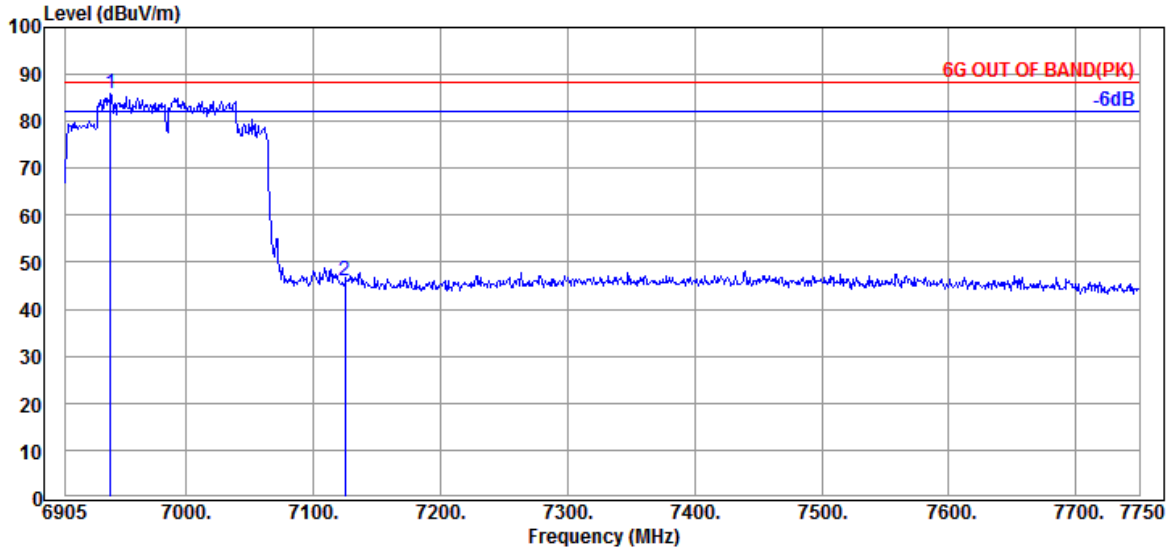

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6940.490               | 35.73                 | 9.69            | 34.43            | 74.76             | 85.75                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 35.06             | 45.90                   | 88.20           | 42.30       | Peak     |

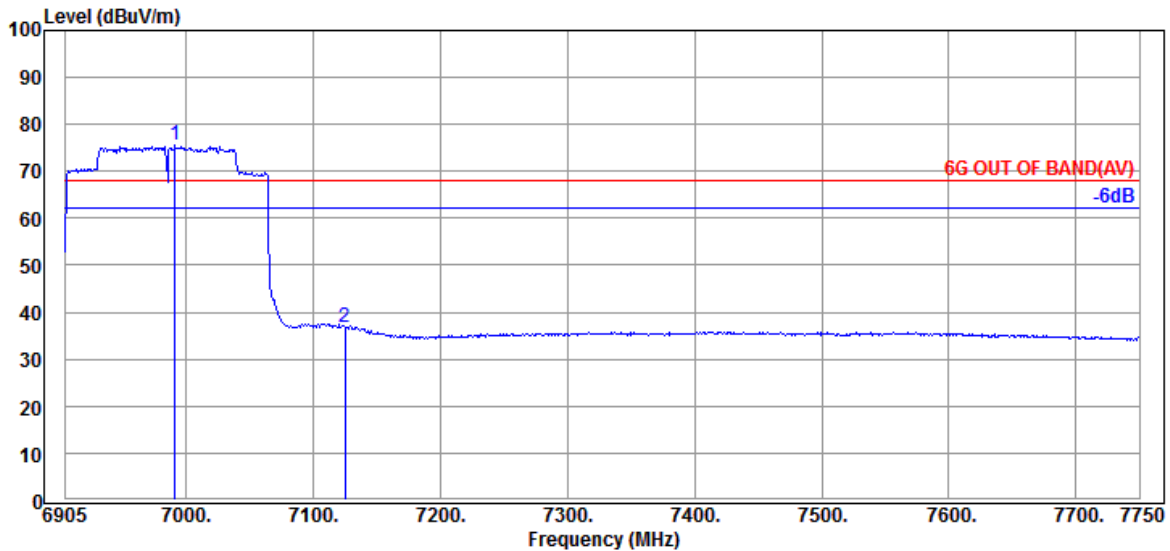


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6991.190               | 36.00                 | 9.71            | 34.46            | 64.20             | 75.45                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 25.96             | 36.80                   | 68.20           | 31.40       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

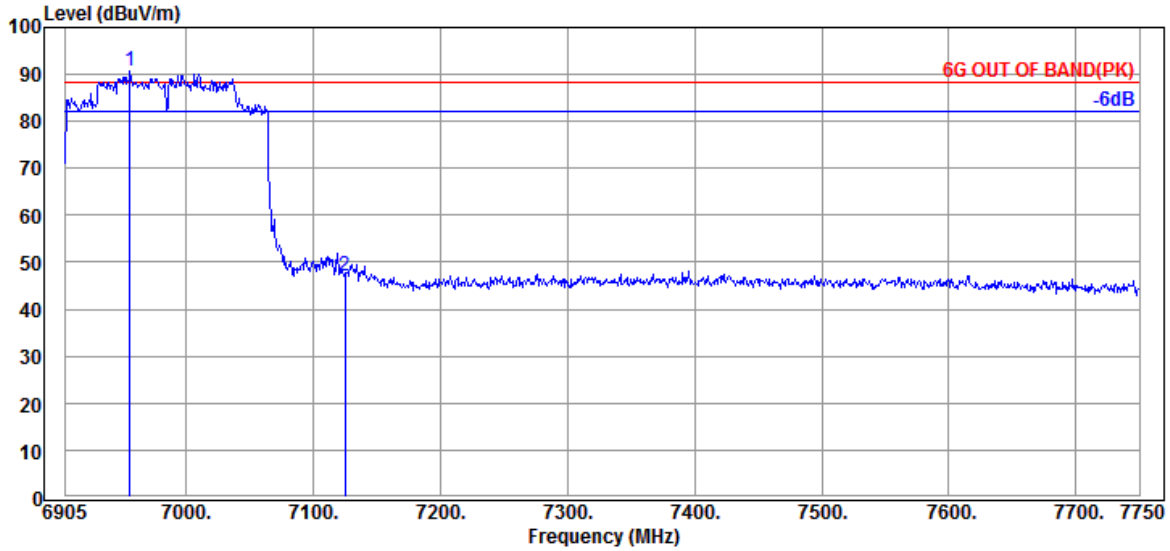

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6955.700               | 35.80                 | 9.70            | 34.45                  | 79.51             | 90.56                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 36.25             | 47.09                   | 88.20           | 41.11       | Peak     |

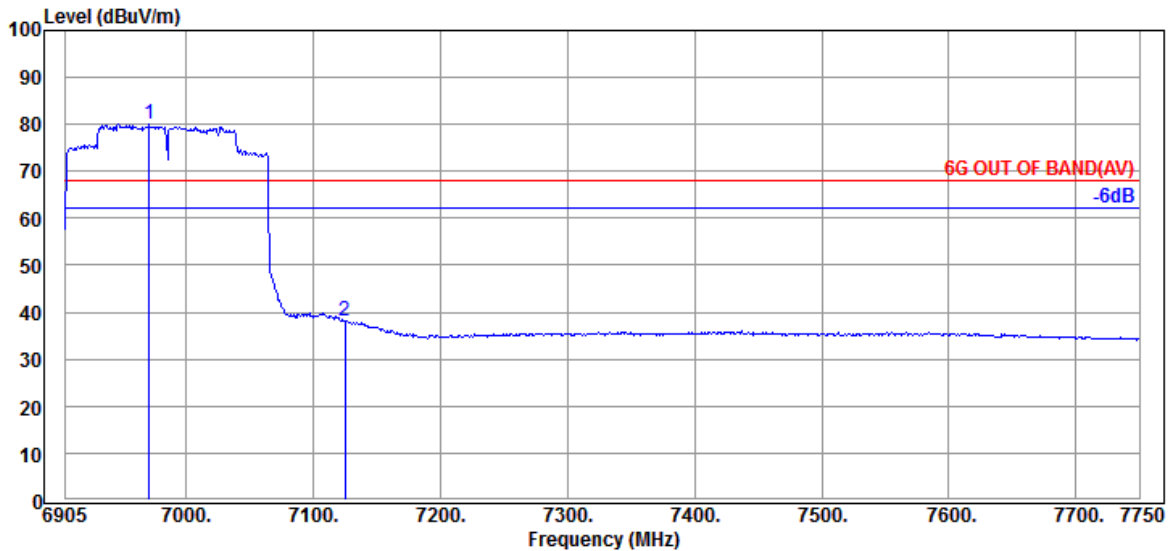


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6970.910               | 35.90                 | 9.70            | 34.46                  | 68.87             | 80.01                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 27.17             | 38.01                   | 68.20           | 30.19       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.


● OFDMA Modulation

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 0          |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

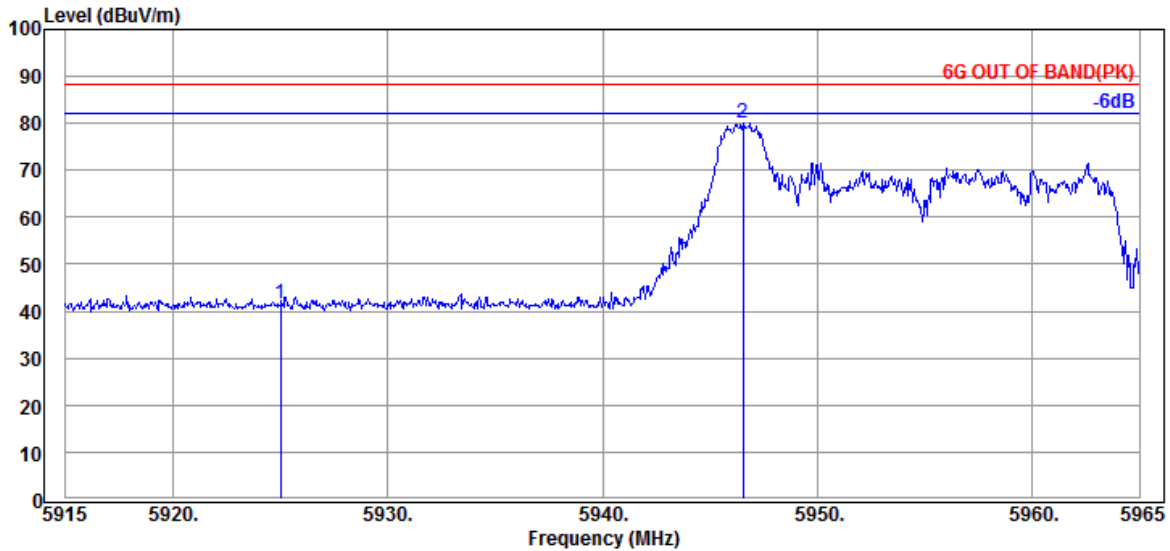

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 30.89             | 41.52                   | 88.20           | 46.68       | Peak     |
| @ 5946.550               | 35.70                 | 9.30            | 34.40                  | 69.49             | 80.09                   | ---             | ---         | Peak     |

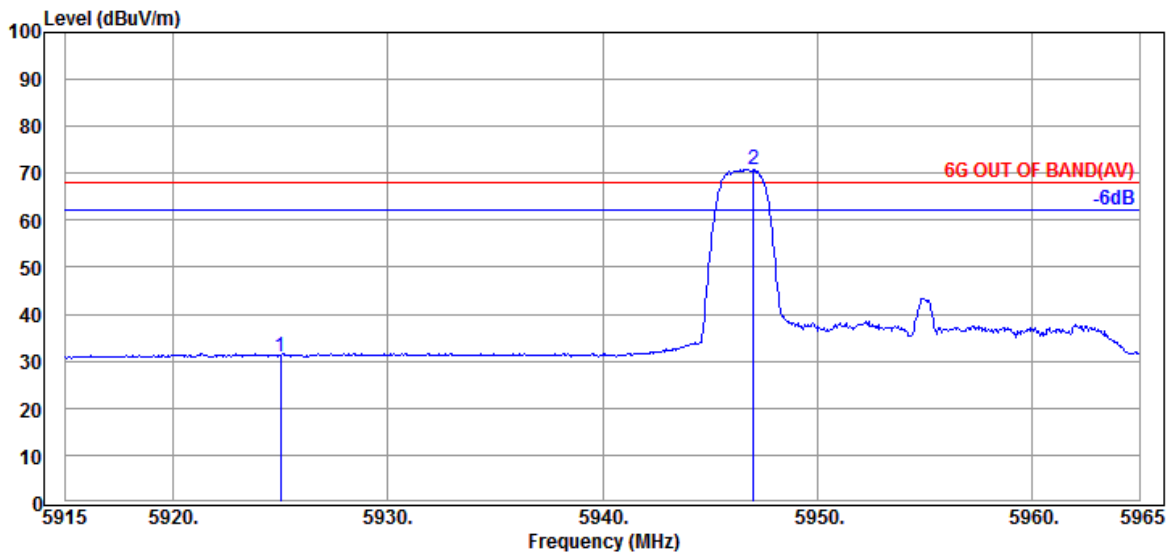


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 20.44             | 31.07                   | 68.20           | 37.13       | Average  |
| @ 5947.050               | 35.70                 | 9.30            | 34.40                  | 60.31             | 70.91                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 0          |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

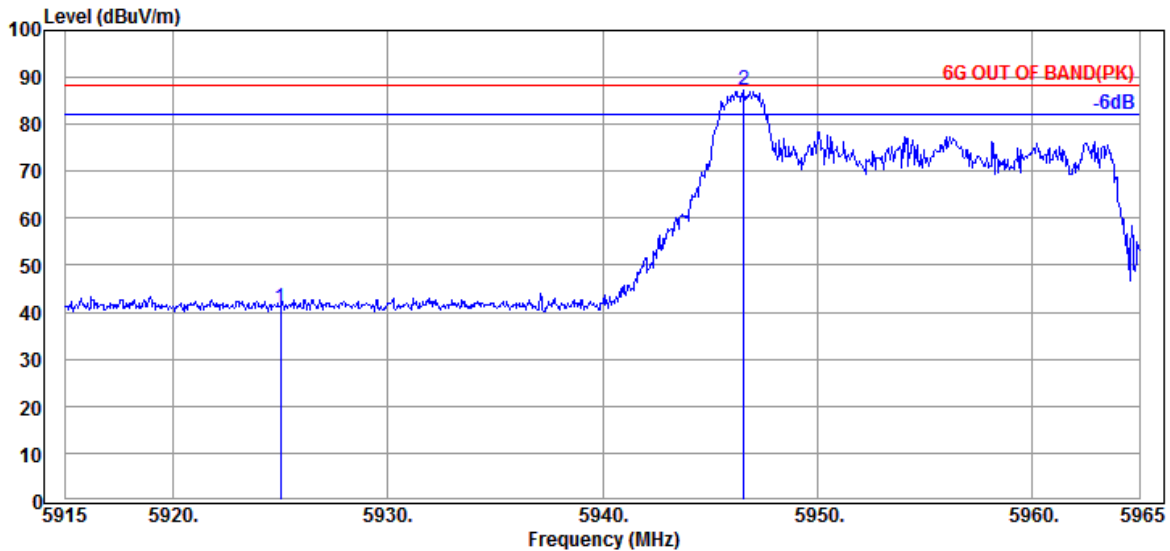

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 30.42             | 41.05                   | 88.20           | 47.15       | Peak     |
| @ 5946.600               | 35.70                 | 9.30            | 34.40            | 76.73             | 87.33                   | ---             | ---         | Peak     |

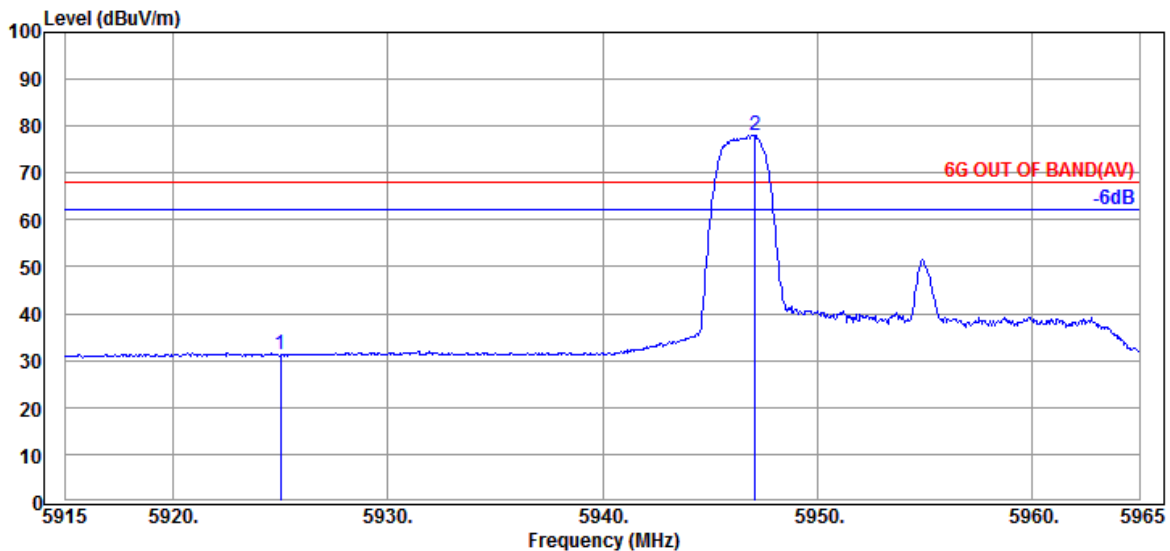

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.54             | 31.17                   | 68.20           | 37.03       | Average  |
| @ 5947.100               | 35.70                 | 9.30            | 34.40            | 67.53             | 78.13                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

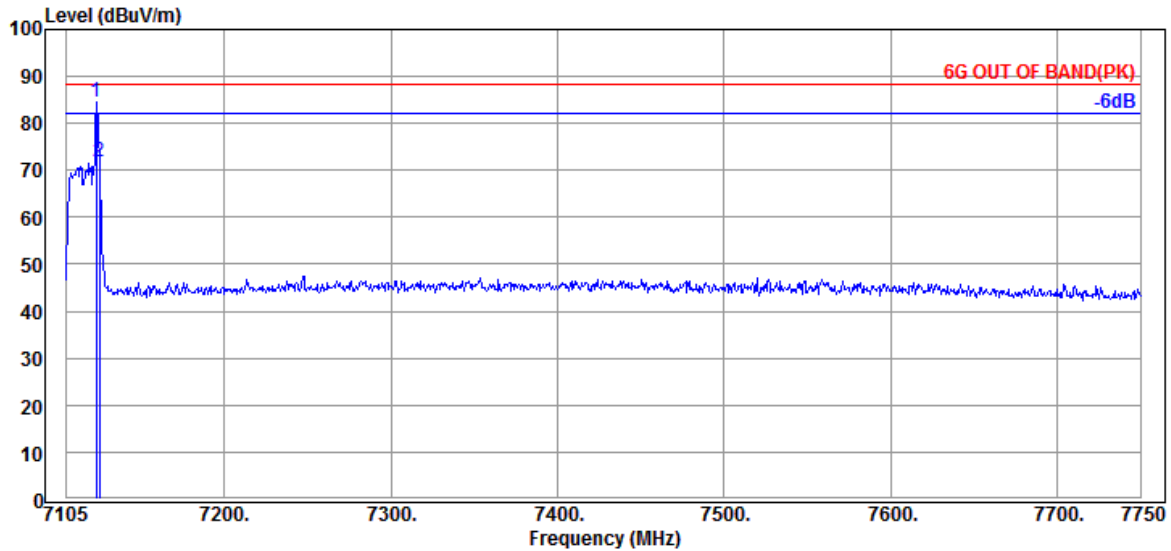

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7123.060                 | 35.57                 | 9.82            | 34.55                  | 73.53             | 84.37                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55                  | 61.14             | 71.98                   | 88.20           | 16.22       | Peak     |

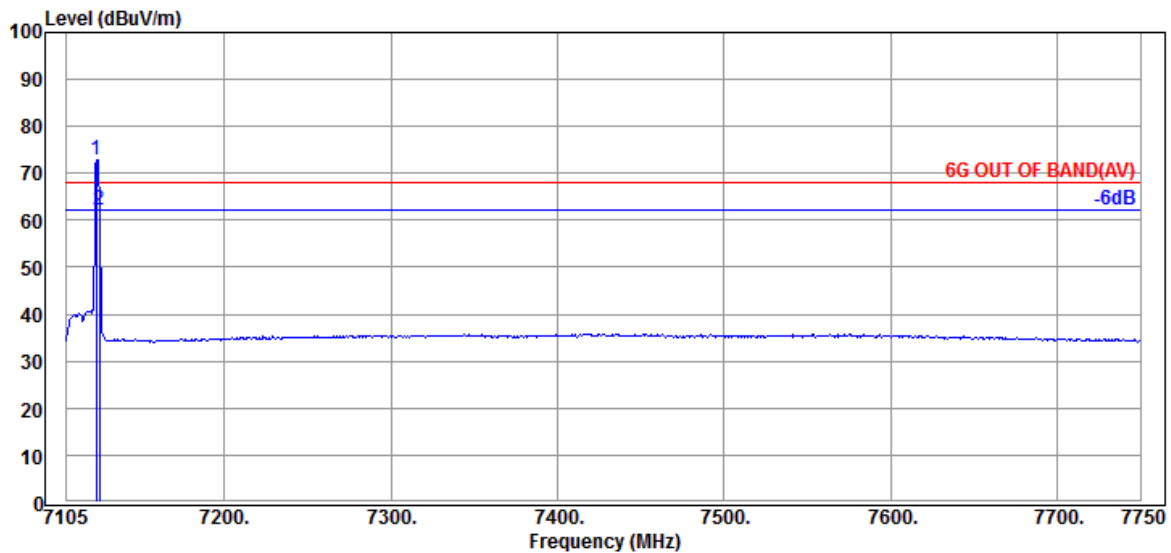


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7123.060                 | 35.57                 | 9.82            | 34.55                  | 62.08             | 72.92                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55                  | 51.30             | 62.14                   | 68.20           | 6.06        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

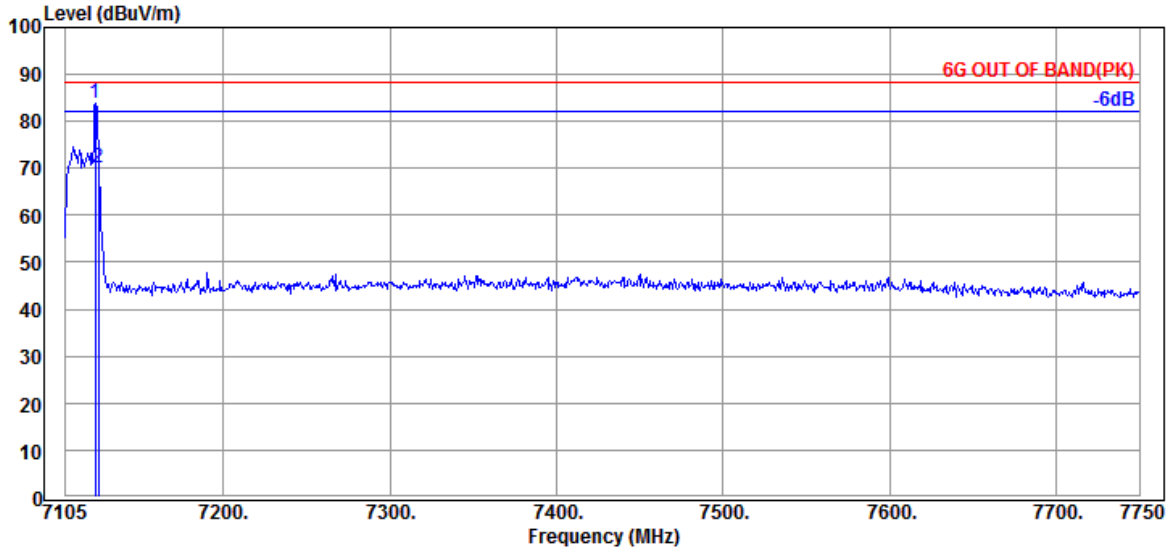

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.060               | 35.57                 | 9.82            | 34.55                  | 72.92             | 83.76                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 59.25             | 70.09                   | 88.20           | 18.11       | Peak     |

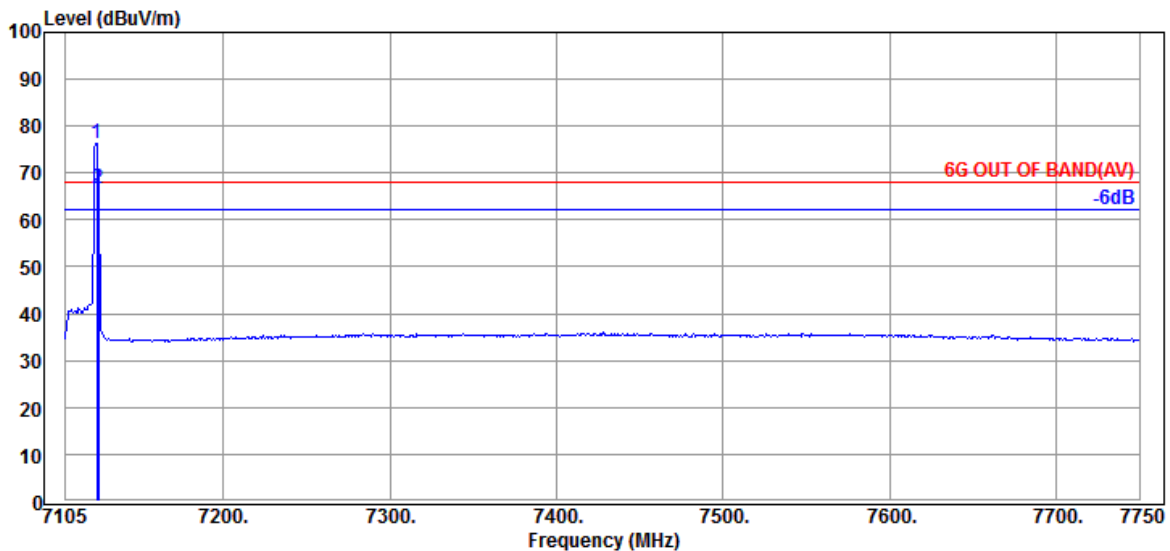

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.57                 | 9.82            | 34.55                  | 65.61             | 76.45                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 55.78             | 66.62                   | 68.20           | 1.58        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

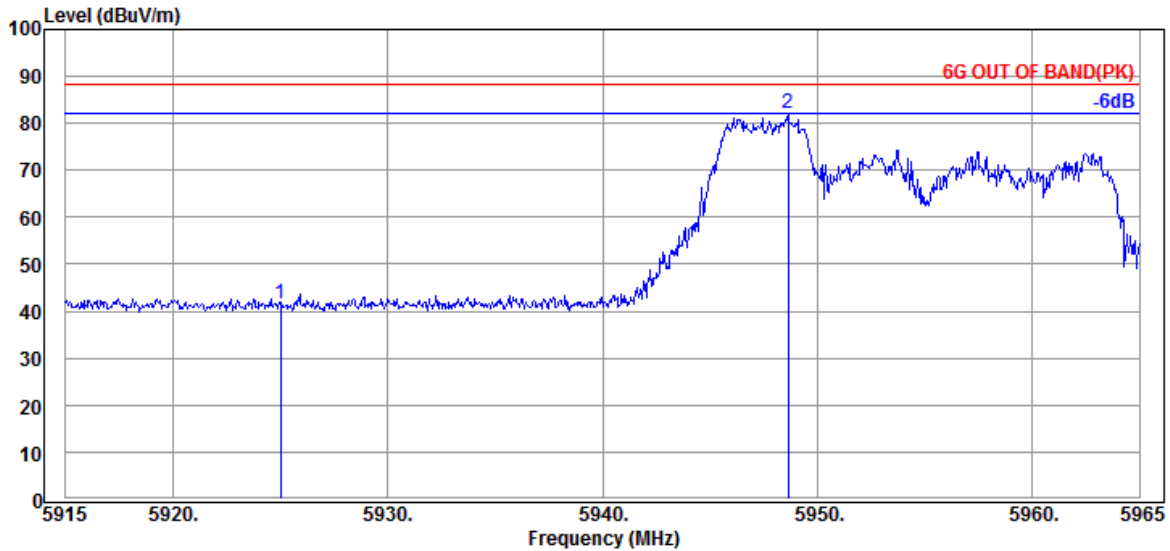

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 31.12             | 41.75                   | 88.20           | 46.45       | Peak     |
| @ 5948.650               | 35.70                 | 9.30            | 34.40            | 71.41             | 82.01                   | ---             | ---         | Peak     |

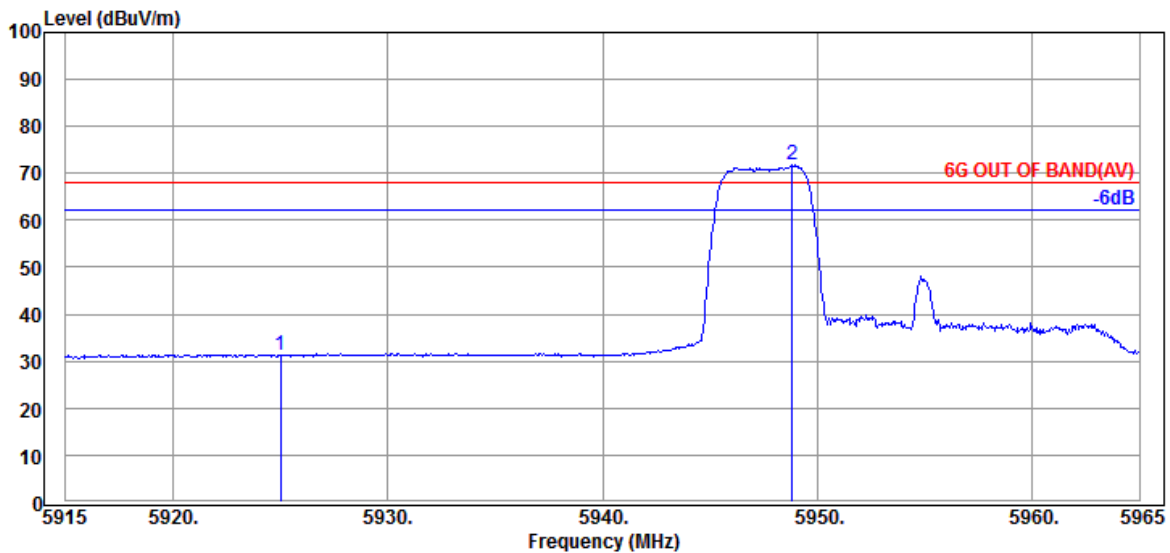


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.69             | 31.32                   | 68.20           | 36.88       | Average  |
| @ 5948.850               | 35.70                 | 9.30            | 34.40            | 61.22             | 71.82                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

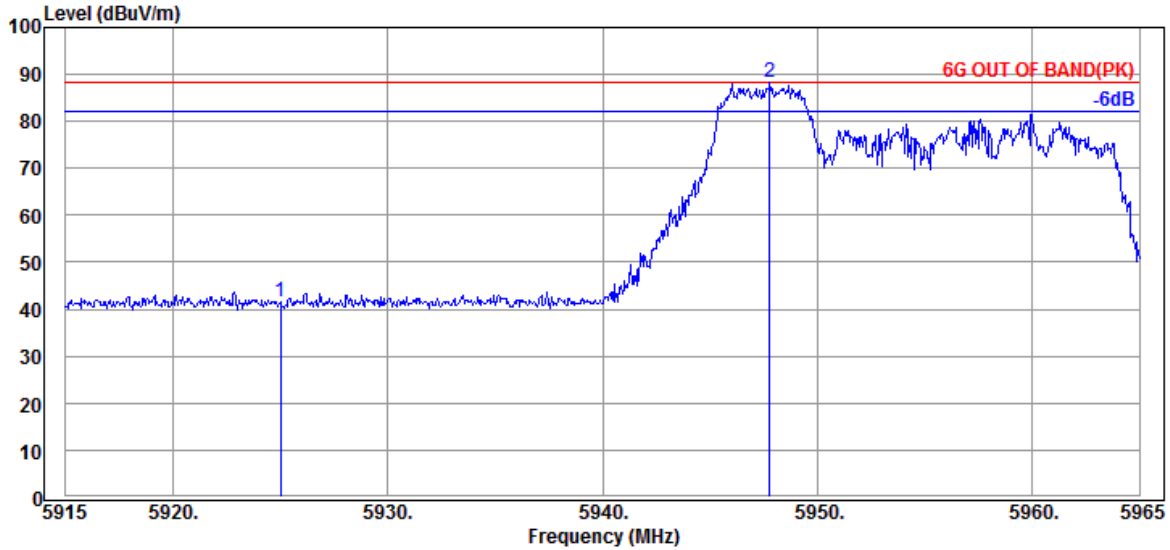

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 30.79             | 41.42                   | 88.20           | 46.78       | Peak     |
| @ 5947.800               | 35.70                 | 9.30            | 34.40            | 77.64             | 88.24                   | ---             | ---         | Peak     |

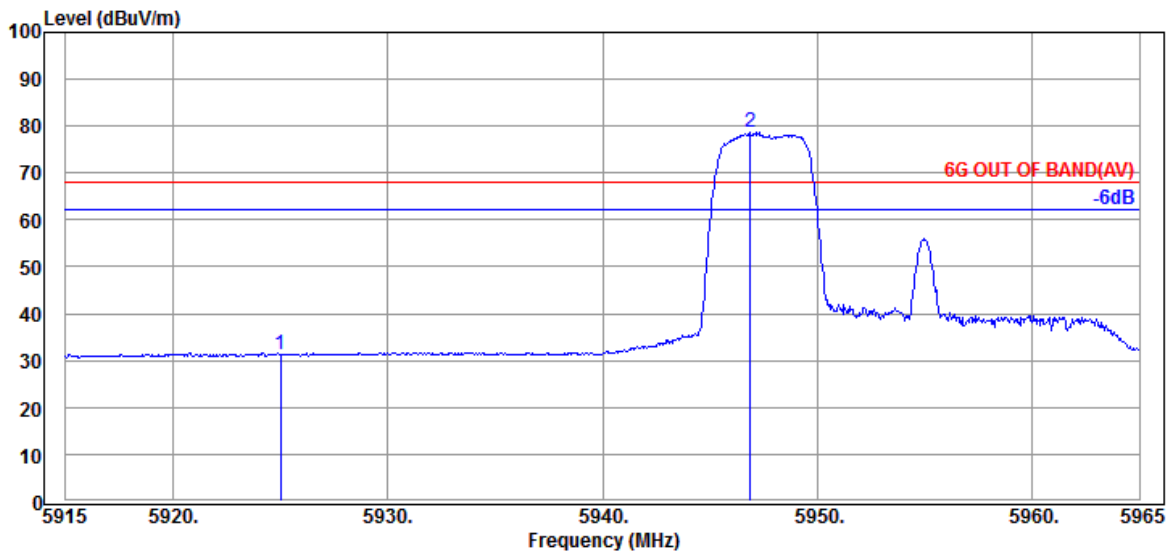

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.66             | 31.29                   | 68.20           | 36.91       | Average  |
| @ 5946.900               | 35.70                 | 9.30            | 34.40            | 68.11             | 78.71                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 40         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

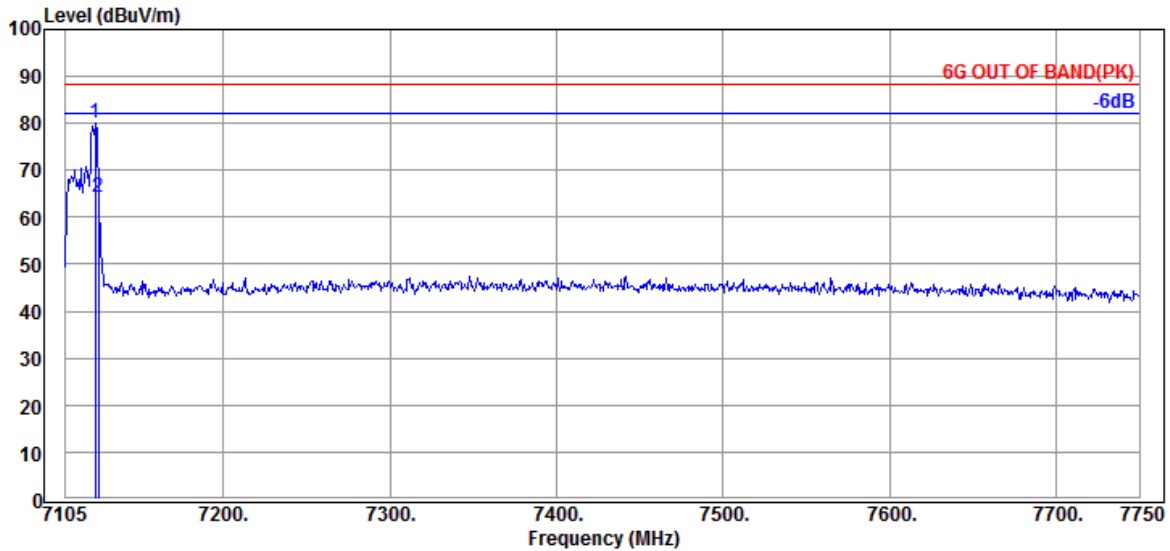

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7123.060                 | 35.57                 | 9.82            | 34.55            | 69.11             | 79.95                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 53.31             | 64.15                   | 88.20           | 24.05       | Peak     |

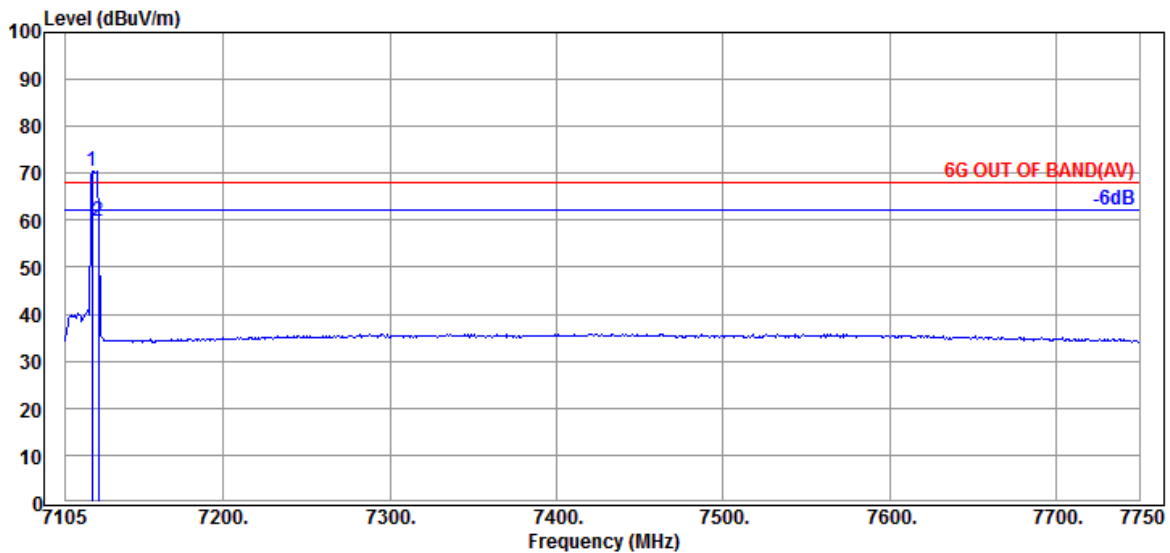


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7121.125                 | 35.57                 | 9.82            | 34.55            | 59.67             | 70.51                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 49.01             | 59.85                   | 68.20           | 8.35        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 40         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

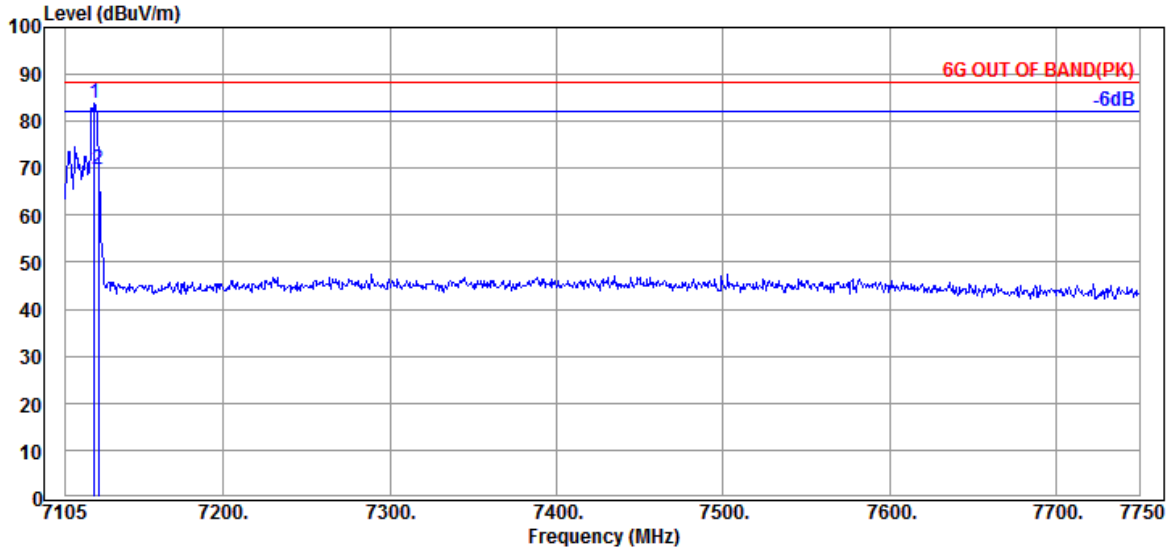

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7122.415               | 35.57                 | 9.82            | 34.55                  | 72.89             | 83.73                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 58.75             | 69.59                   | 88.20           | 18.61       | Peak     |

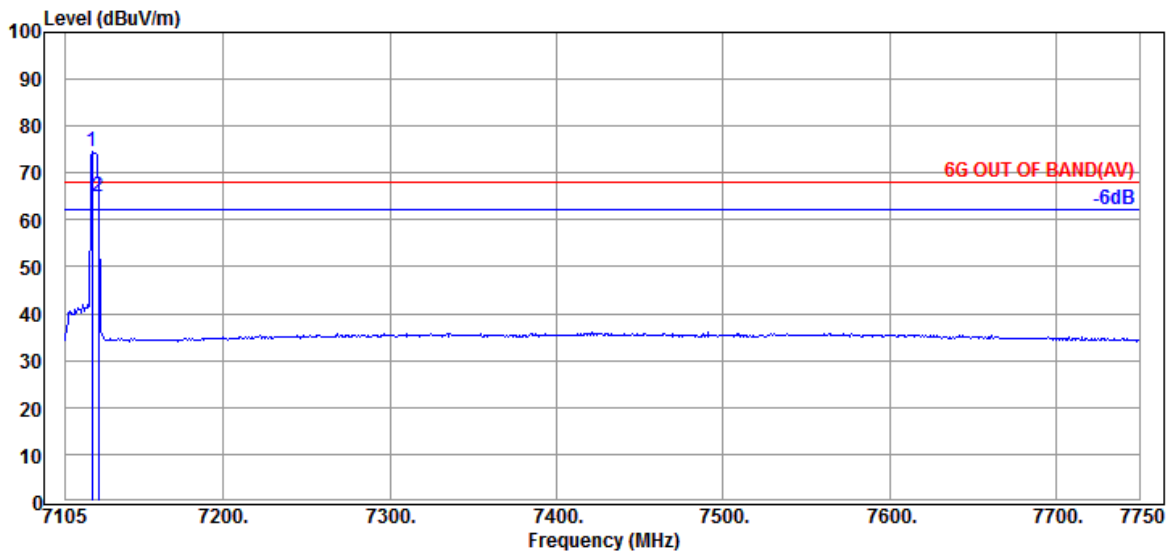


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7121.125               | 35.57                 | 9.82            | 34.55                  | 63.60             | 74.44                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 54.02             | 64.86                   | 68.20           | 3.34        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

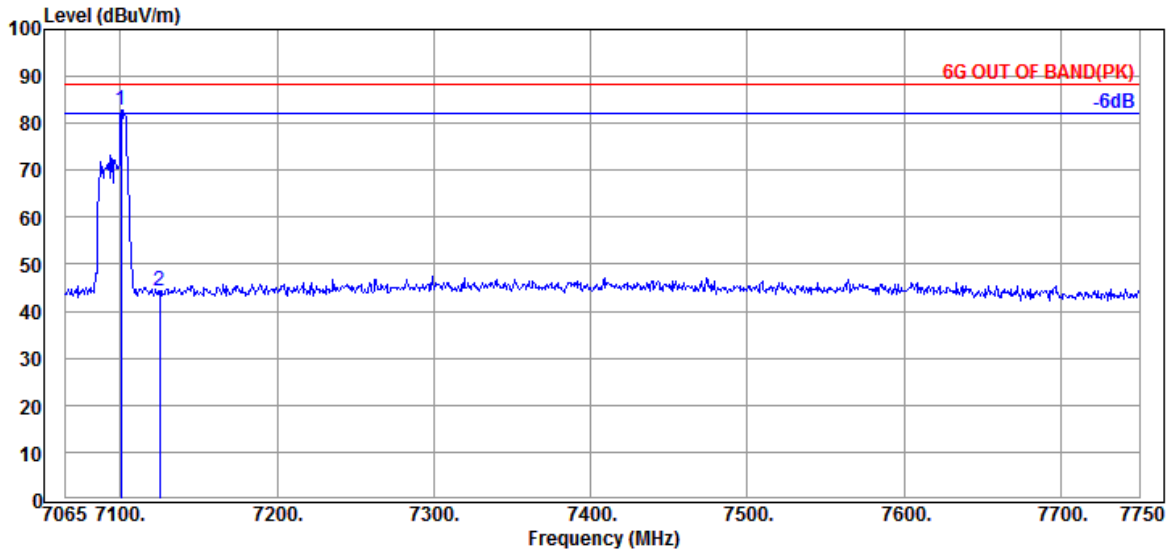

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7100.620                 | 35.50                 | 9.80            | 34.53            | 72.06             | 82.83                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 33.46             | 44.30                   | 88.20           | 43.90       | Peak     |

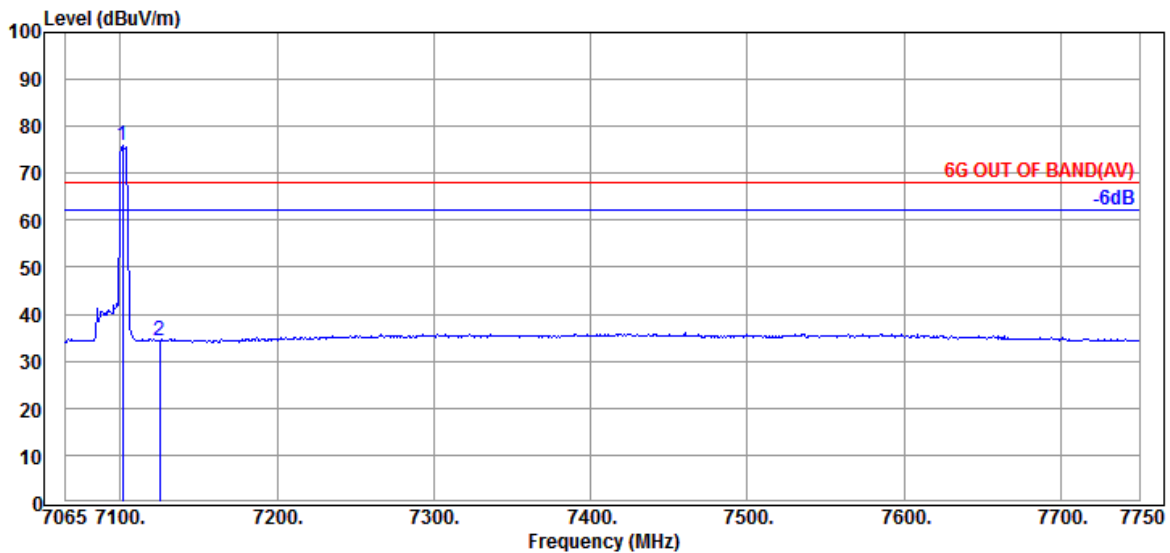

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7101.305                 | 35.50                 | 9.80            | 34.53            | 65.03             | 75.80                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 23.58             | 34.42                   | 68.20           | 33.78       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

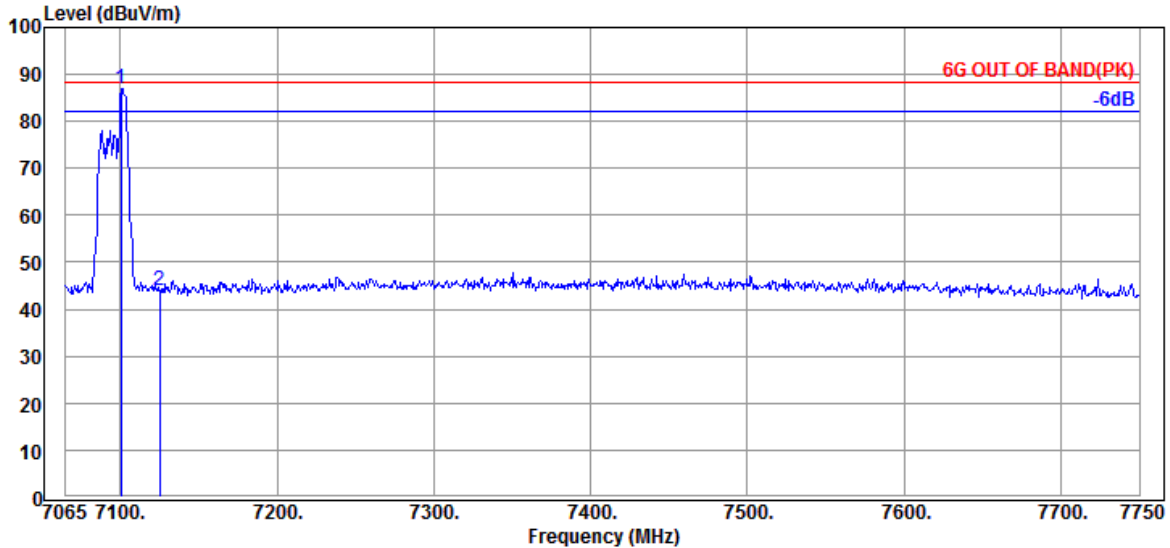

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.620               | 35.50                 | 9.80            | 34.53                  | 76.27             | 87.04                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 32.98             | 43.82                   | 88.20           | 44.38       | Peak     |

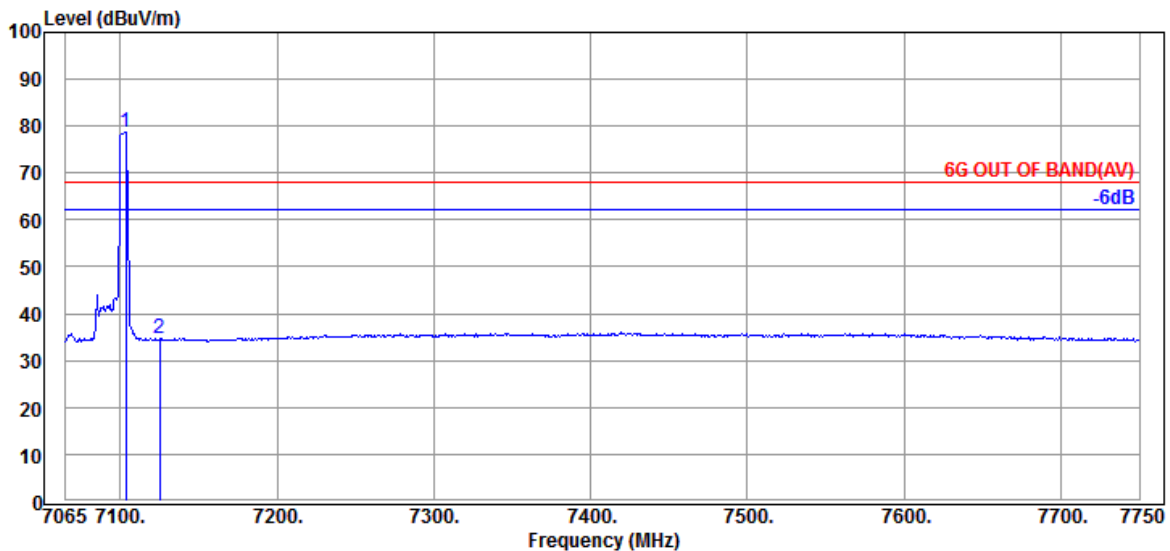

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7103.360               | 35.50                 | 9.80            | 34.53                  | 67.93             | 78.70                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.70             | 34.54                   | 68.20           | 33.66       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

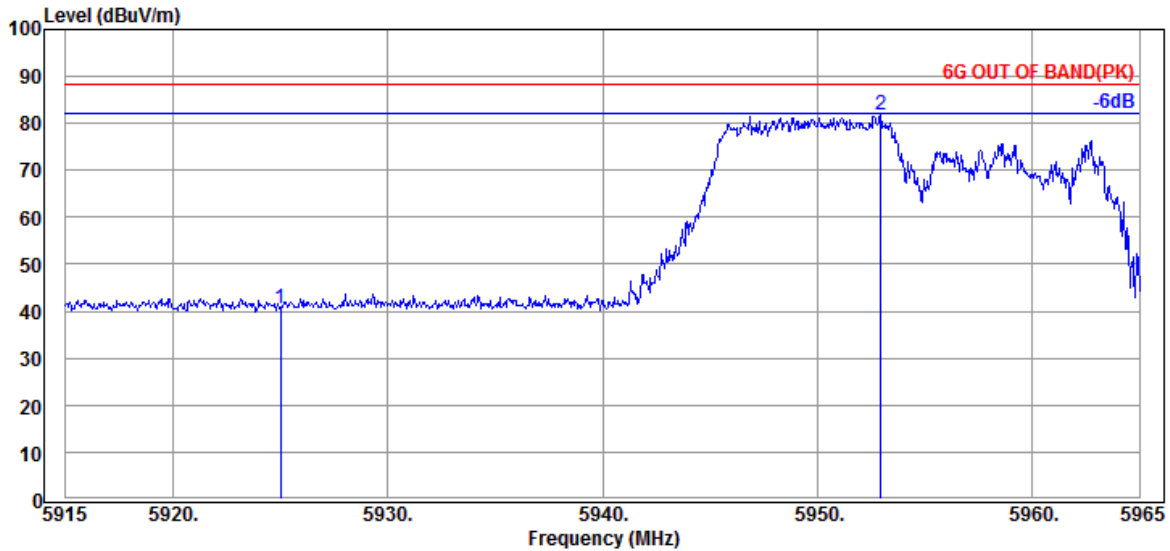

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 29.77             | 40.40                   | 88.20           | 47.80       | Peak     |
| @ 5952.950               | 35.70                 | 9.30            | 34.40                  | 71.33             | 81.93                   | ---             | ---         | Peak     |

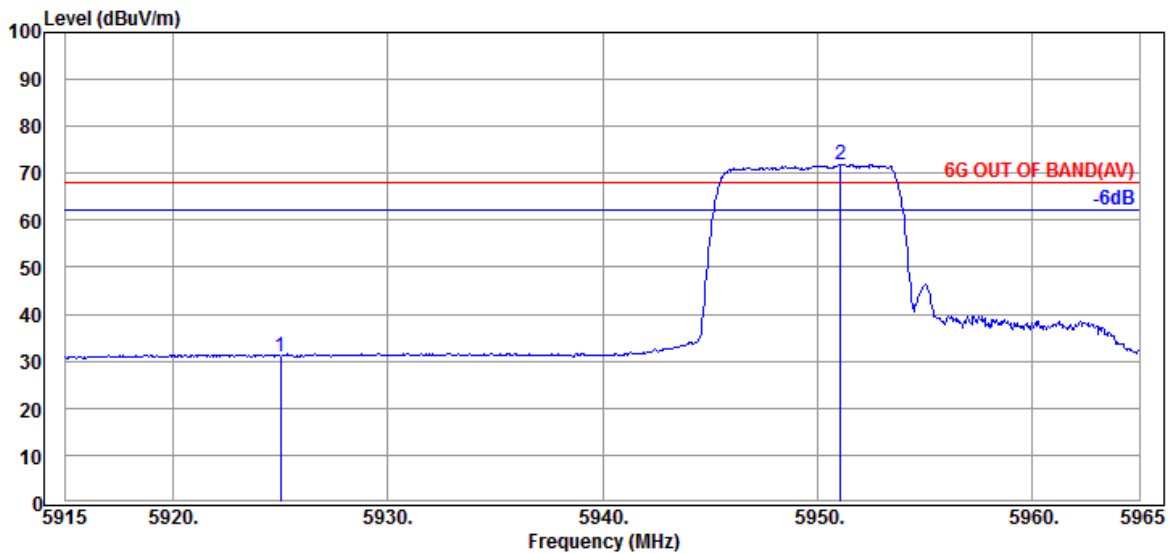

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 20.44             | 31.07                   | 68.20           | 37.13       | Average  |
| @ 5951.100               | 35.70                 | 9.30            | 34.40                  | 61.35             | 71.95                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

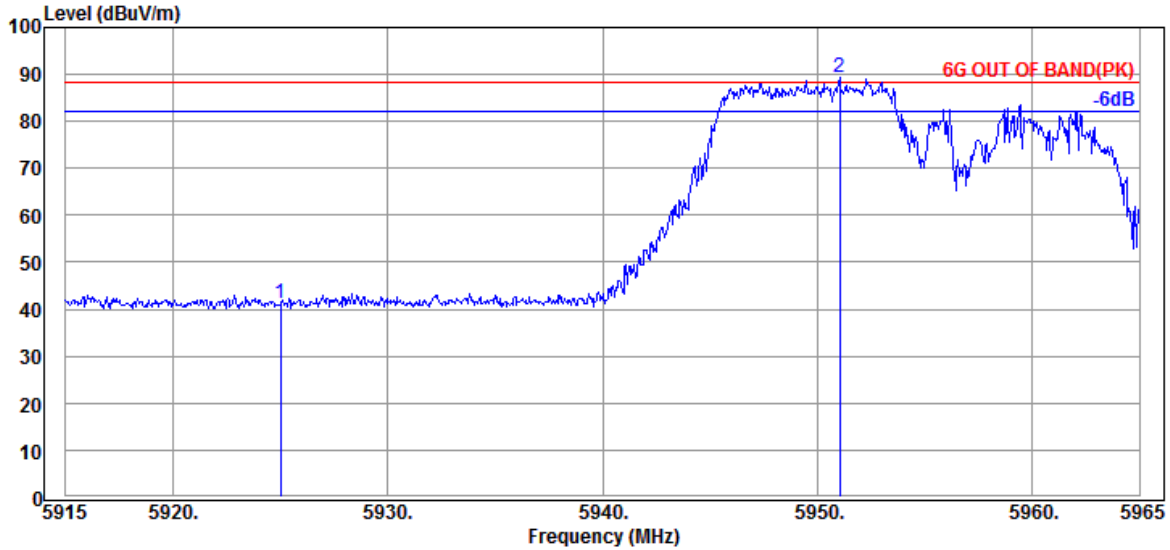

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 30.46             | 41.09                   | 88.20           | 47.11       | Peak     |
| @ 5951.050               | 35.70                 | 9.30            | 34.40            | 78.69             | 89.29                   | ---             | ---         | Peak     |

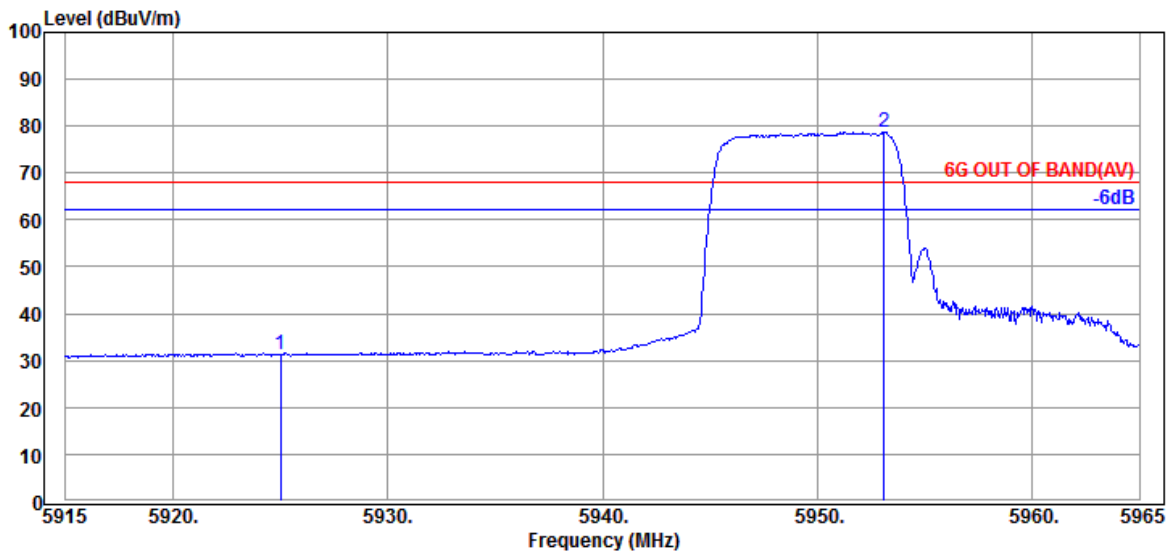

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.59             | 31.22                   | 68.20           | 36.98       | Average  |
| @ 5953.100               | 35.70                 | 9.30            | 34.40            | 68.26             | 78.86                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 54         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

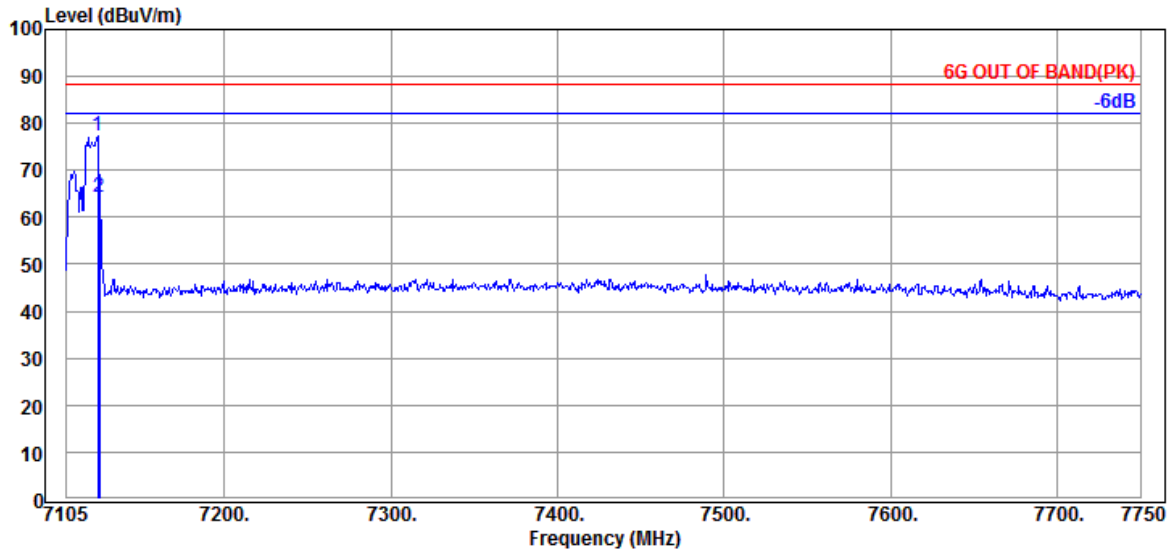

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7123.705                 | 35.57                 | 9.82            | 34.55            | 66.31             | 77.15                   | ---             | ---         | Peak     |
|   | 7124.995                 | 35.57                 | 9.82            | 34.55            | 53.27             | 64.11                   | 88.20           | 24.09       | Peak     |

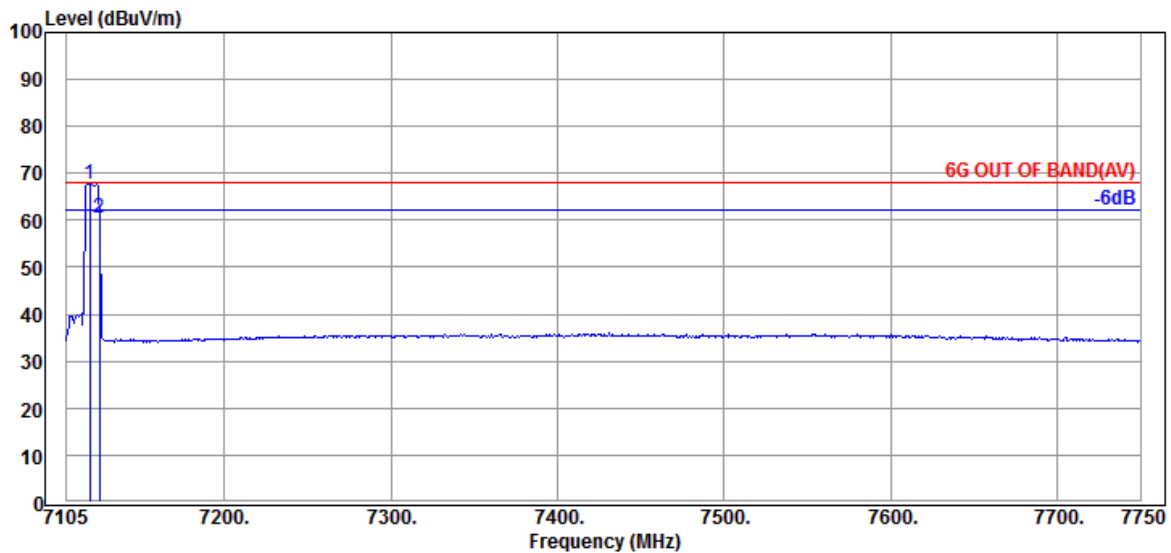

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7119.190                 | 35.57                 | 9.82            | 34.55            | 56.93             | 67.77                   | ---             | ---         | Average  |
|   | 7124.995                 | 35.57                 | 9.82            | 34.55            | 49.47             | 60.31                   | 68.20           | 7.89        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 54         |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

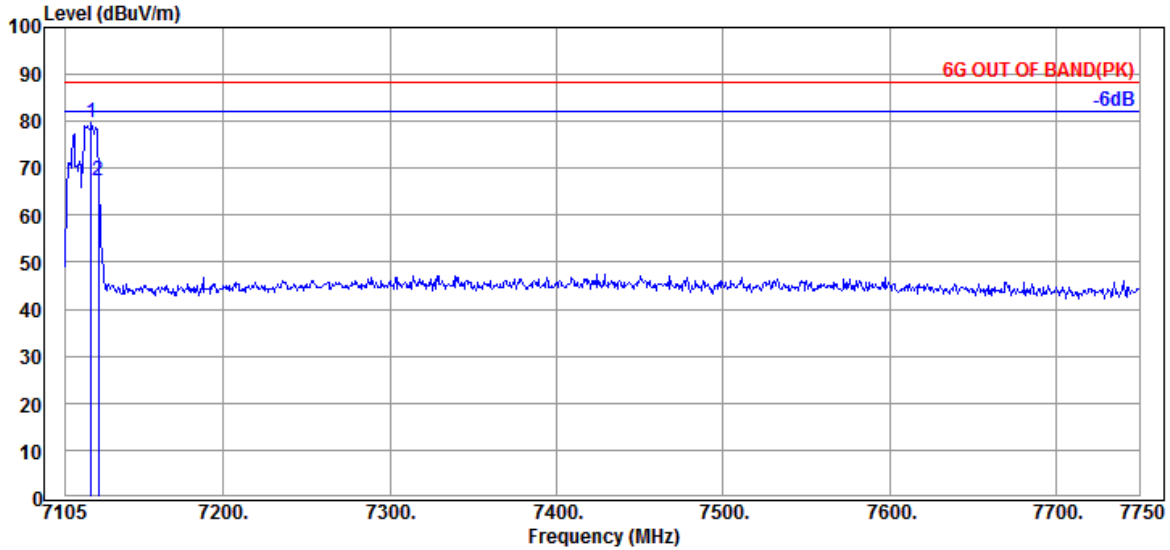

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7120.480               | 35.57                 | 9.82            | 34.55                  | 68.91             | 79.75                   | ---             | ---         | Peak     |
| 7124.995                 | 35.57                 | 9.82            | 34.55                  | 56.59             | 67.43                   | 88.20           | 20.77       | Peak     |

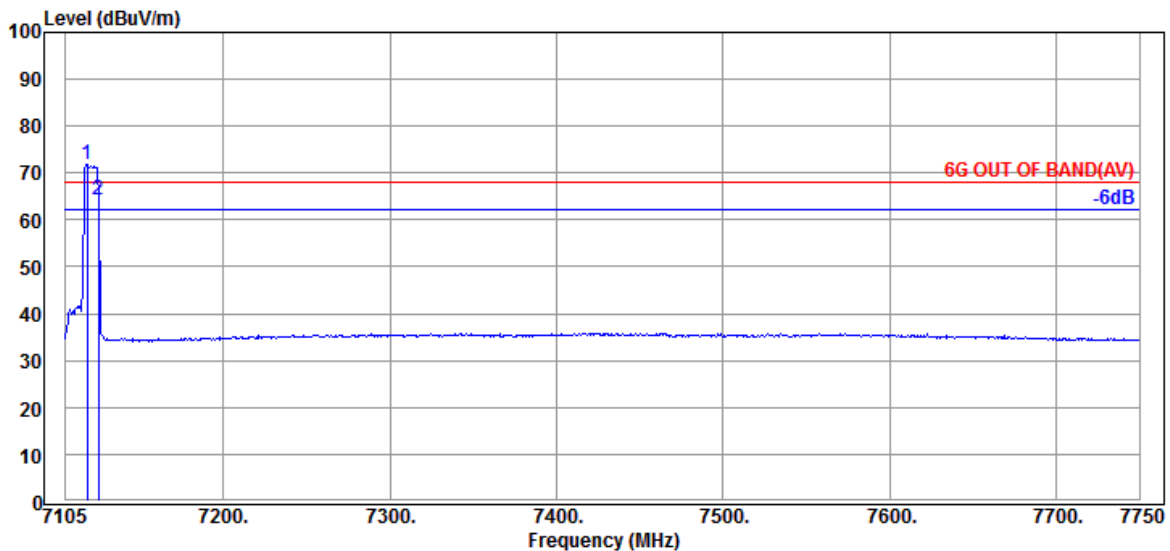

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7117.900               | 35.57                 | 9.82            | 34.55                  | 60.91             | 71.75                   | ---             | ---         | Average  |
| 7124.995                 | 35.57                 | 9.82            | 34.55                  | 53.49             | 64.33                   | 68.20           | 3.87        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

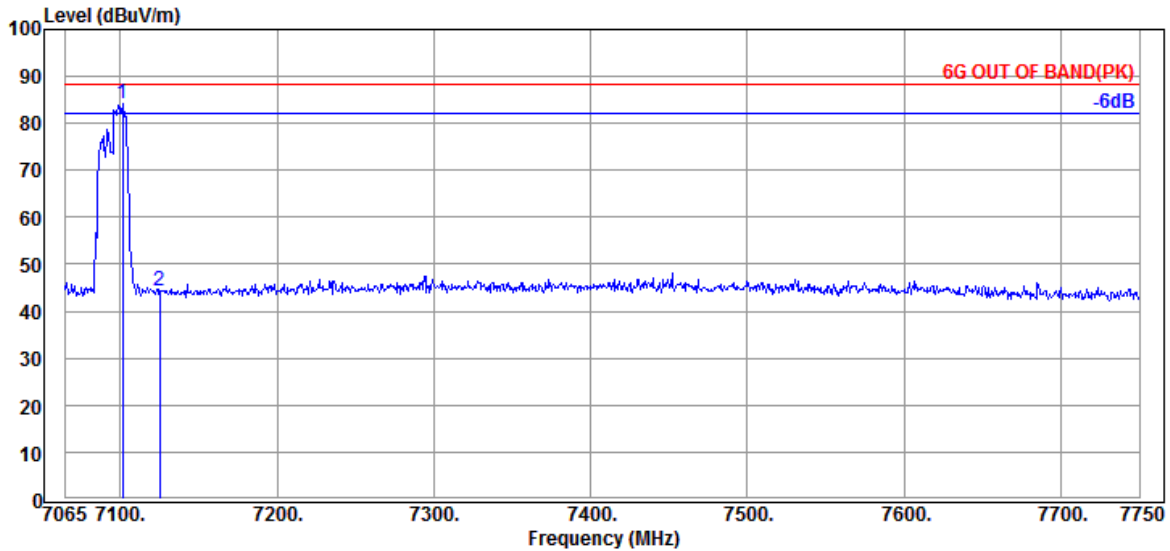

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7101.305                 | 35.50                 | 9.80            | 34.53                  | 73.48             | 84.25                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.47             | 44.31                   | 88.20           | 43.89       | Peak     |

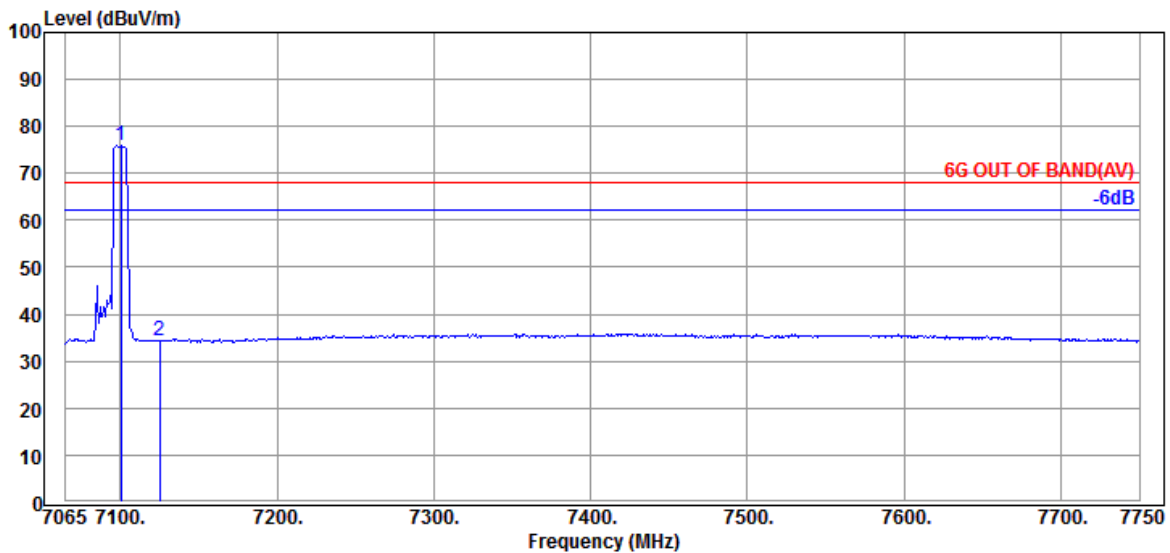

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7100.620                 | 35.50                 | 9.80            | 34.53                  | 65.18             | 75.95                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.62             | 34.46                   | 68.20           | 33.74       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

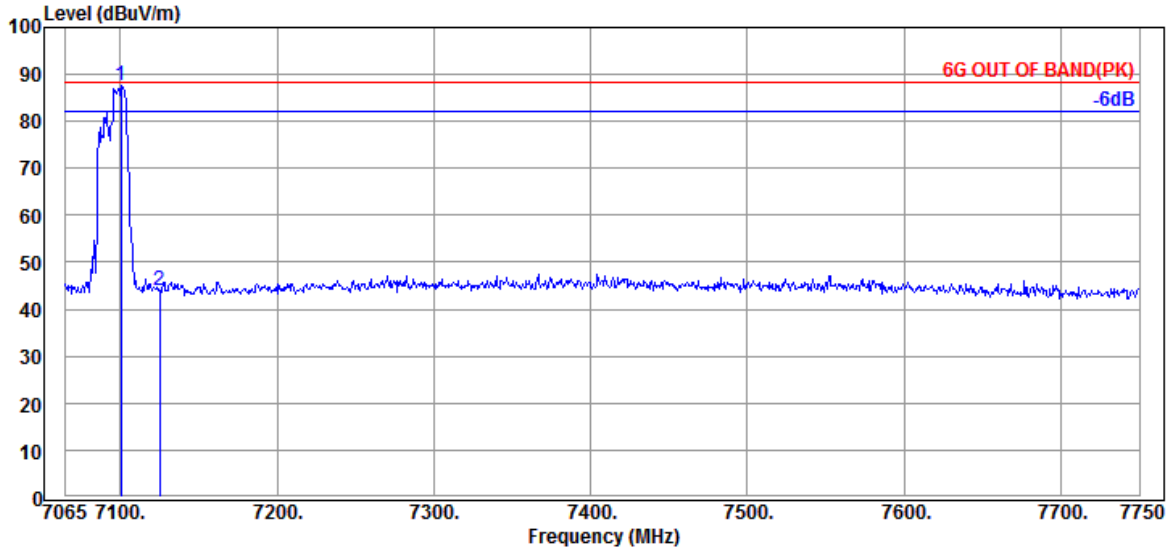

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.620               | 35.50                 | 9.80            | 34.53                  | 76.78             | 87.55                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.15             | 43.99                   | 88.20           | 44.21       | Peak     |

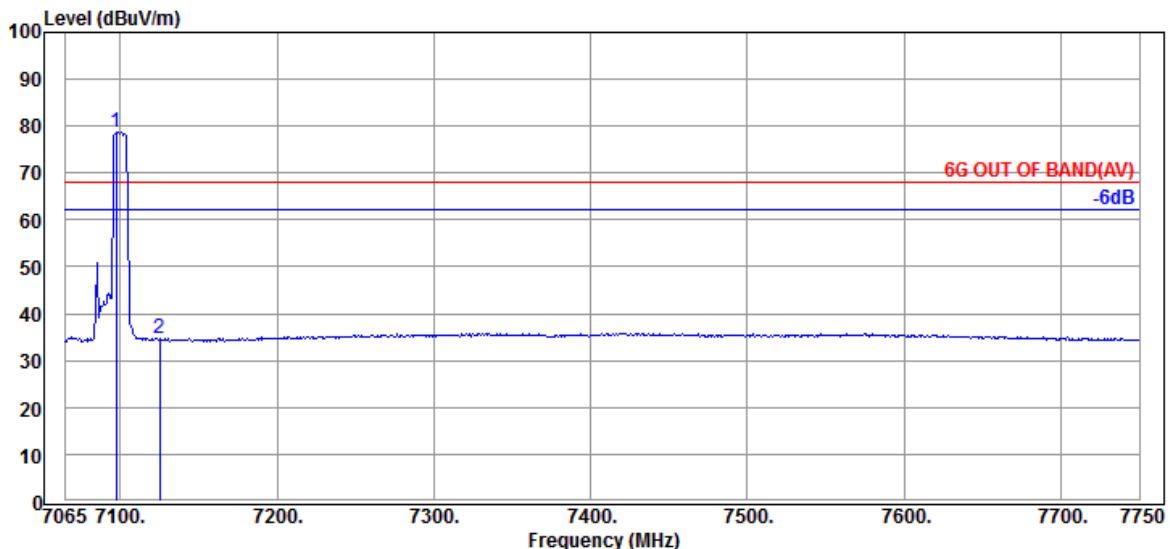


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7097.195               | 35.50                 | 9.80            | 34.53                  | 67.79             | 78.56                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.71             | 34.55                   | 68.20           | 33.65       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

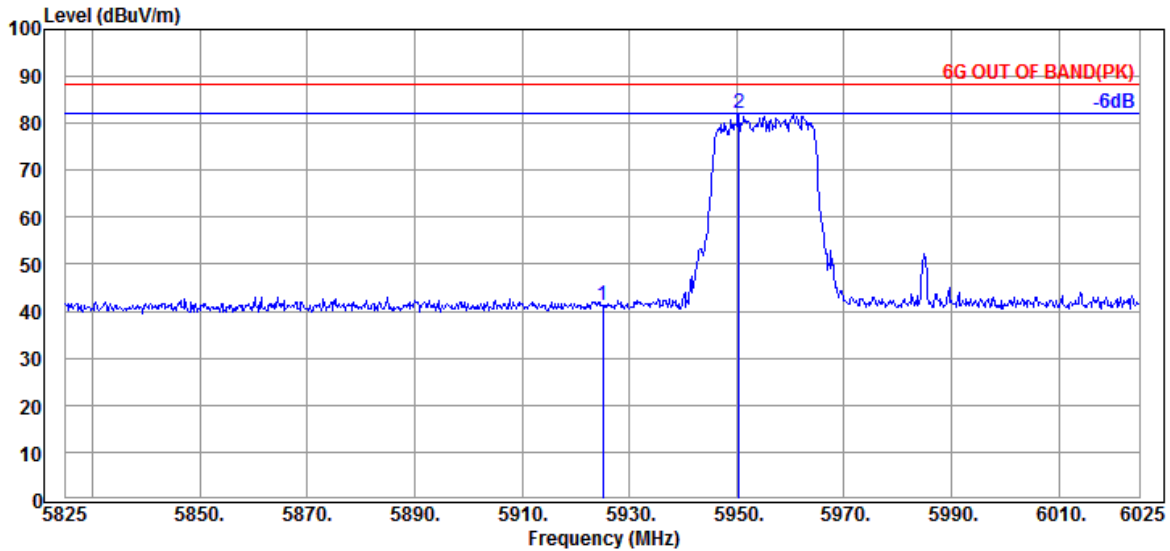

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 30.78             | 41.41                   | 88.20           | 46.79       | Peak     |
| @ 5950.400               | 35.70                 | 9.30            | 34.40            | 71.43             | 82.03                   | ---             | ---         | Peak     |

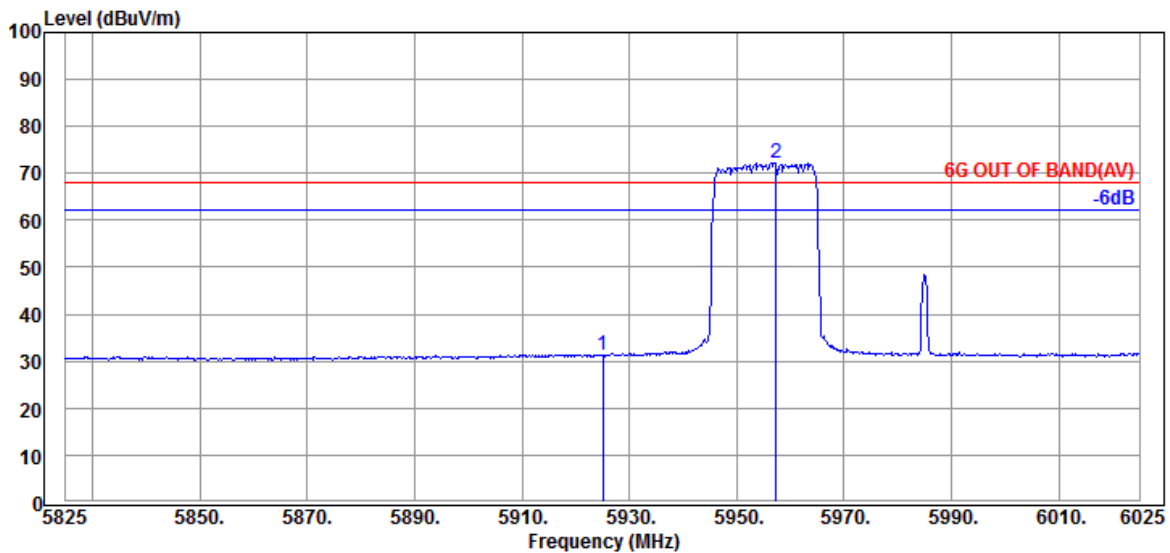


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.74             | 31.37                   | 68.20           | 36.83       | Average  |
| @ 5957.400               | 35.70                 | 9.30            | 34.41            | 61.62             | 72.21                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

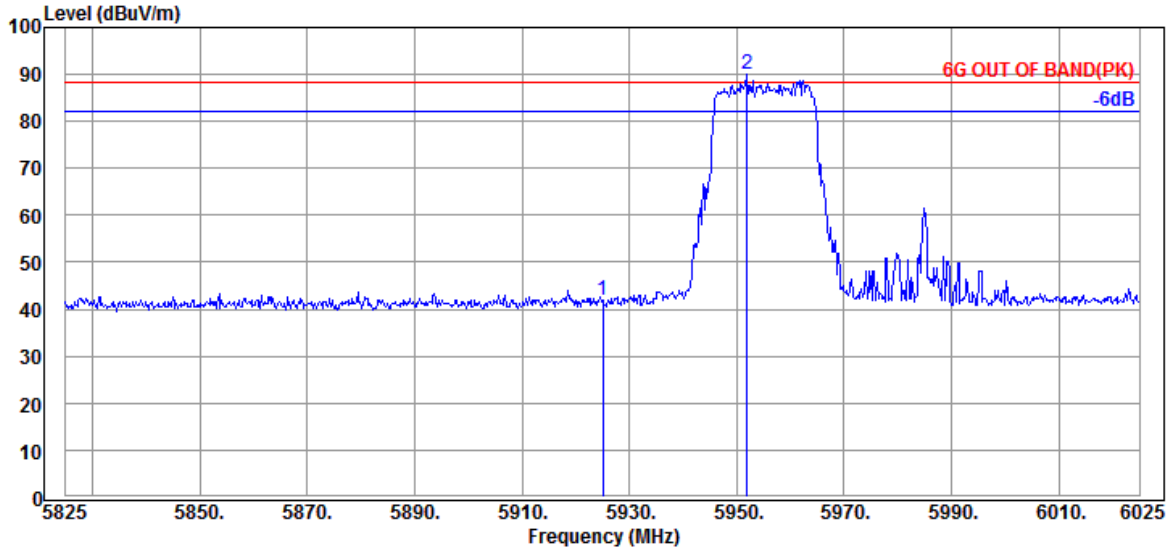

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 31.38             | 42.01                   | 88.20           | 46.19       | Peak     |
| @ 5952.000               | 35.70                 | 9.30            | 34.40            | 79.54             | 90.14                   | ---             | ---         | Peak     |

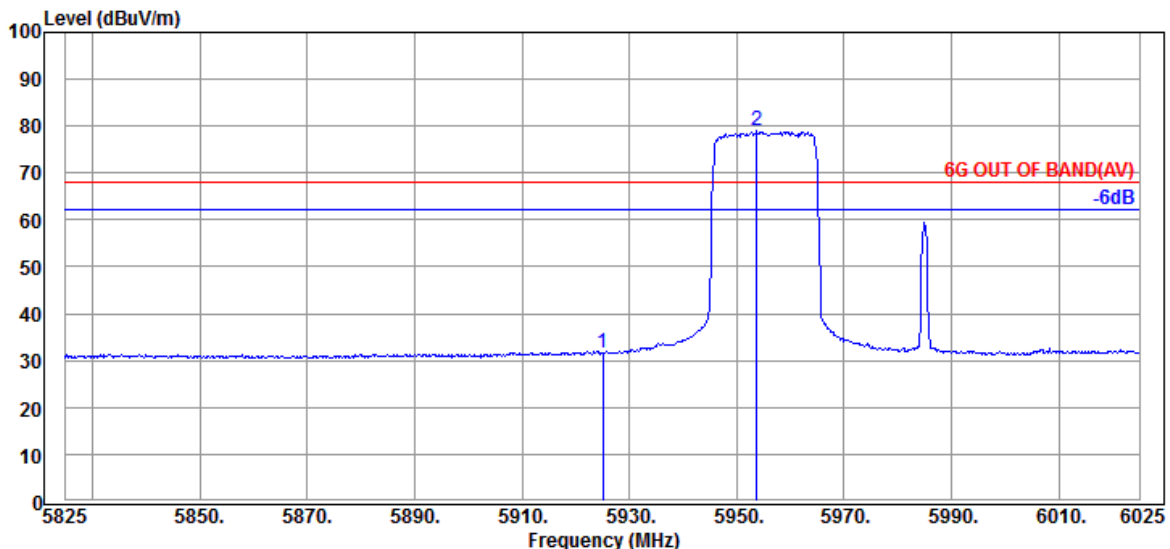

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 21.10             | 31.73                   | 68.20           | 36.47       | Average  |
| @ 5953.800               | 35.70                 | 9.30            | 34.40            | 68.44             | 79.04                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

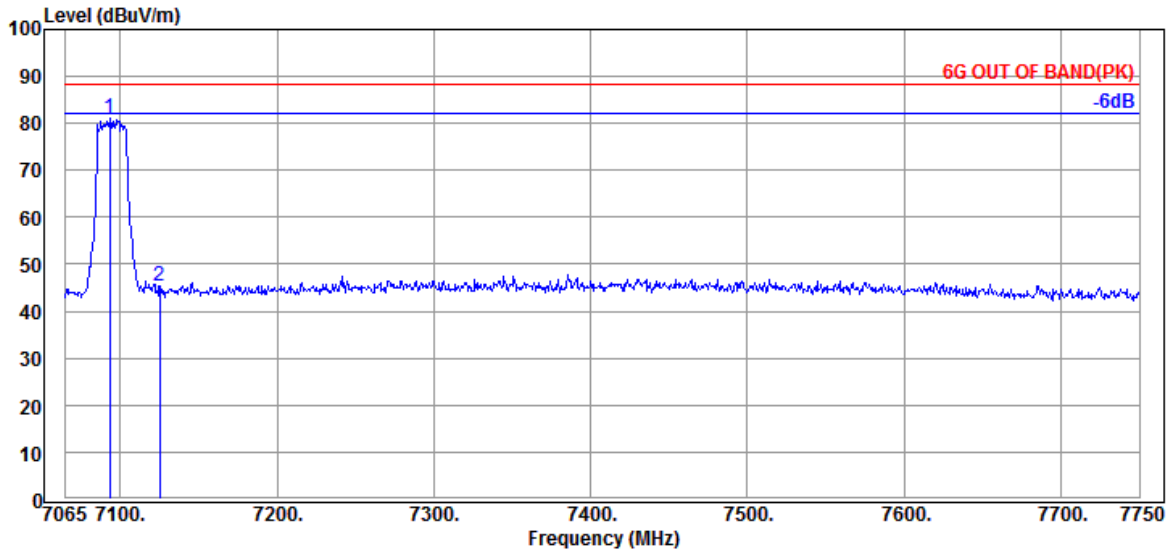

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7093.085                 | 35.50                 | 9.80            | 34.53            | 70.16             | 80.93                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 34.36             | 45.20                   | 88.20           | 43.00       | Peak     |

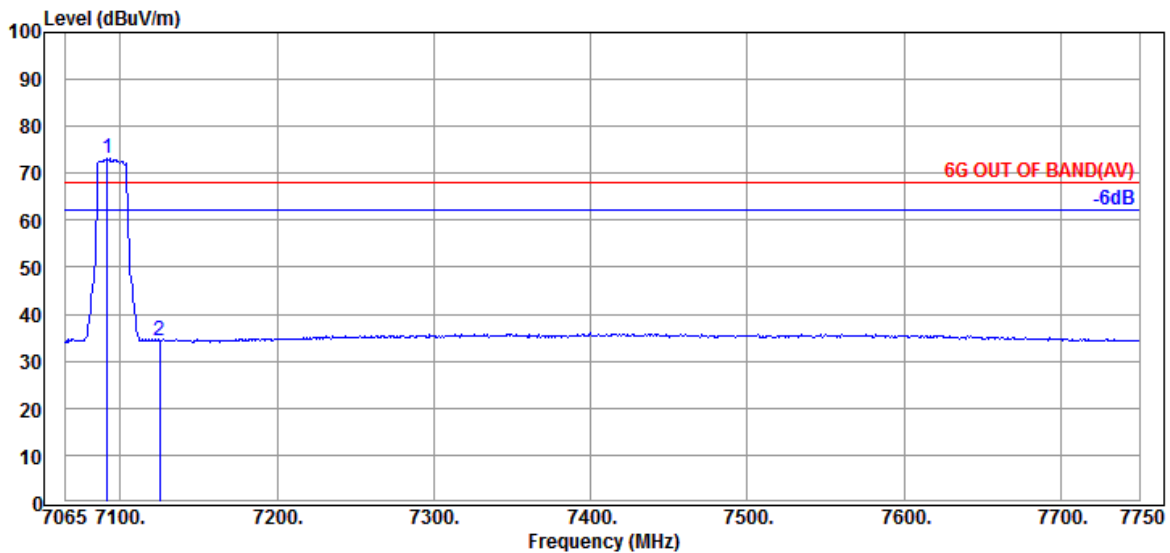

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7091.715                 | 35.50                 | 9.80            | 34.53            | 62.40             | 73.17                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 23.50             | 34.34                   | 68.20           | 33.86       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

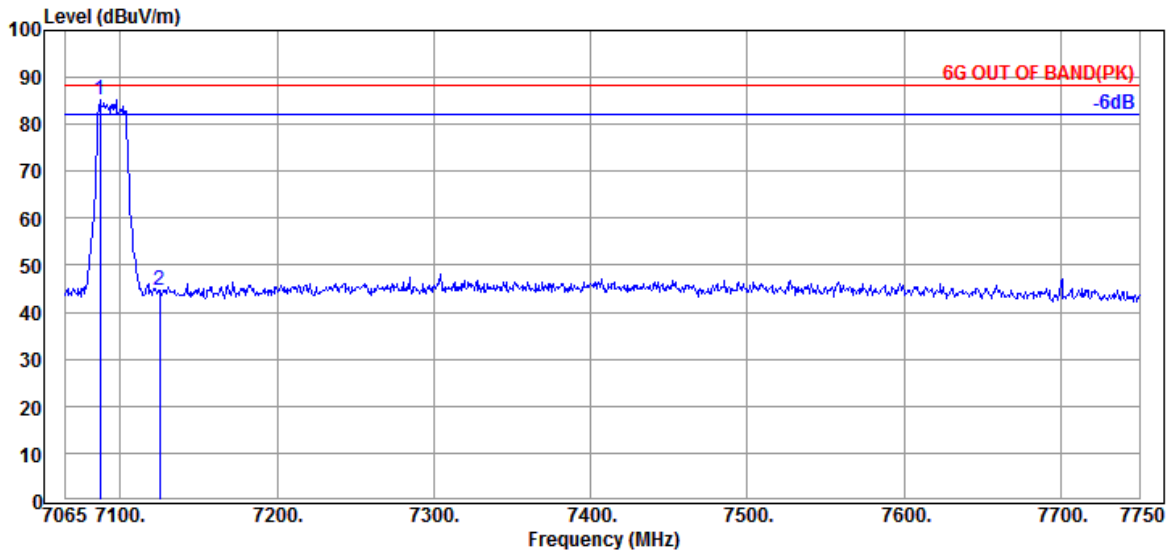

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7086.920               | 35.50                 | 9.80            | 34.53                  | 74.57             | 85.34                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.67             | 44.51                   | 88.20           | 43.69       | Peak     |

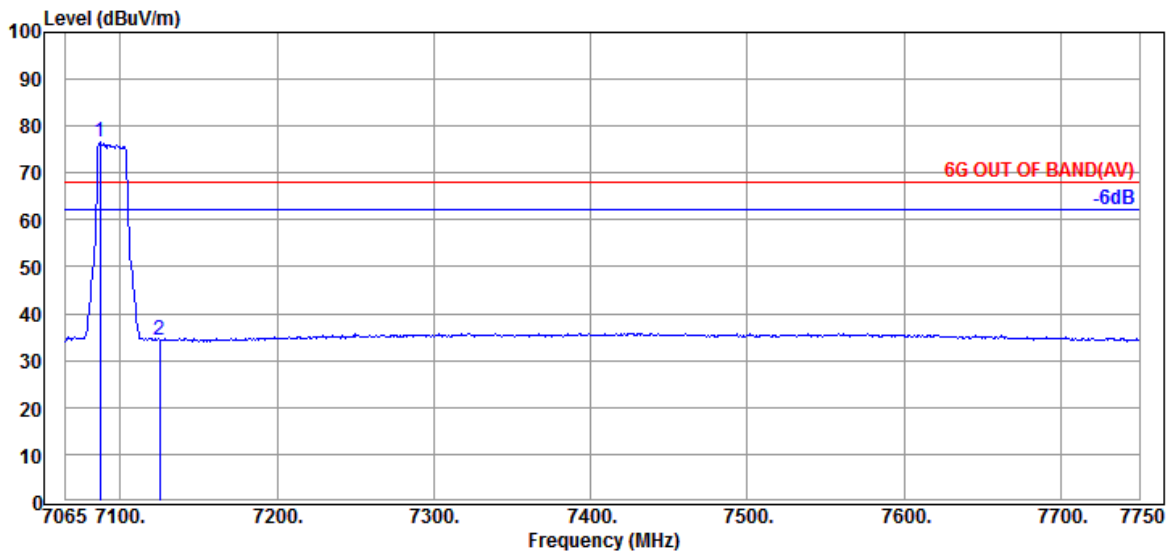


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7086.920               | 35.50                 | 9.80            | 34.53                  | 65.76             | 76.53                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.49             | 34.33                   | 68.20           | 33.87       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

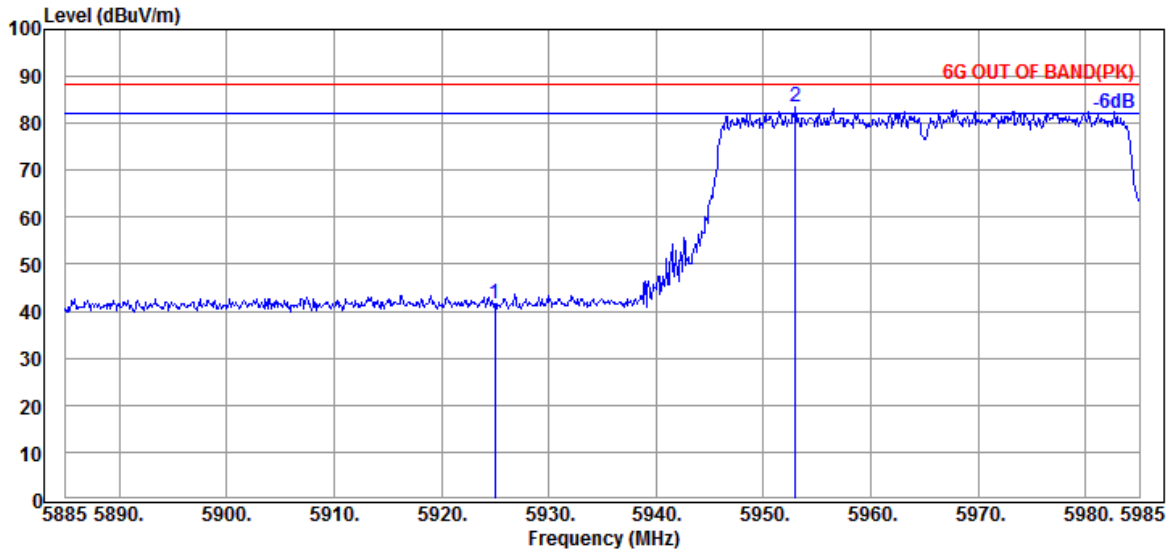

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 31.12             | 41.75                   | 88.20           | 46.45       | Peak     |
| @ 5953.000               | 35.70                 | 9.30            | 34.40            | 72.74             | 83.34                   | ---             | ---         | Peak     |

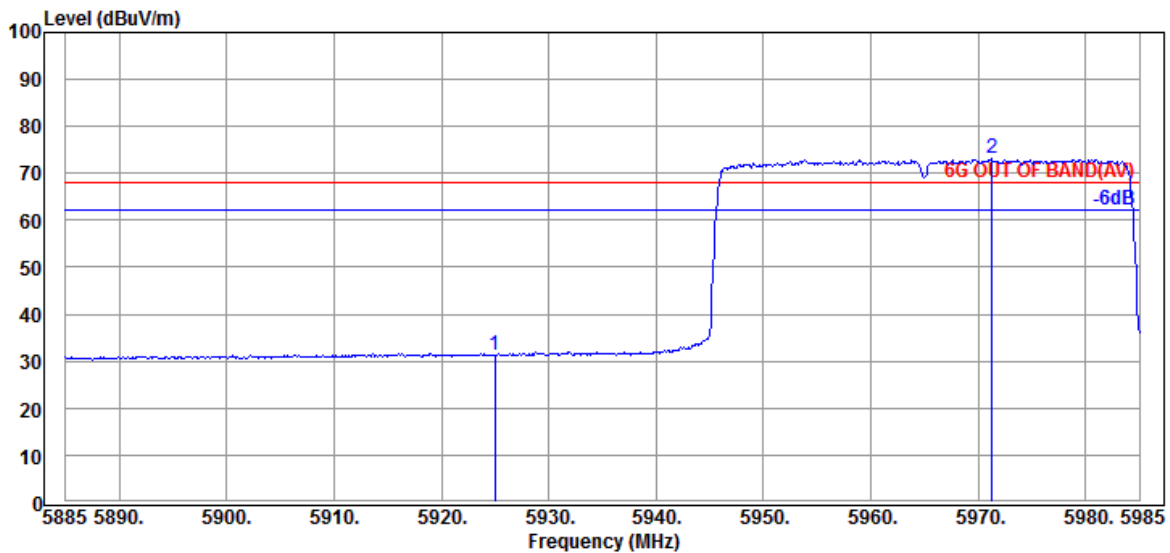


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 20.67             | 31.30                   | 68.20           | 36.90       | Average  |
| @ 5971.300               | 35.63                 | 9.31            | 34.41            | 62.57             | 73.10                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

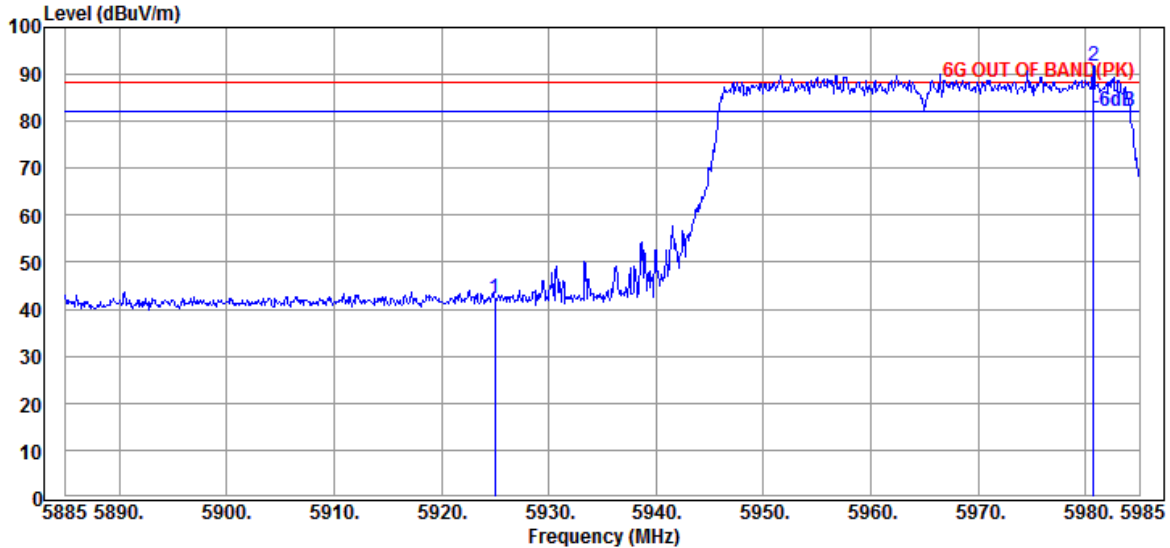

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 31.75             | 42.38                   | 88.20           | 45.82       | Peak     |
| @ 5980.700               | 35.57                 | 9.32            | 34.42            | 81.42             | 91.89                   | ---             | ---         | Peak     |

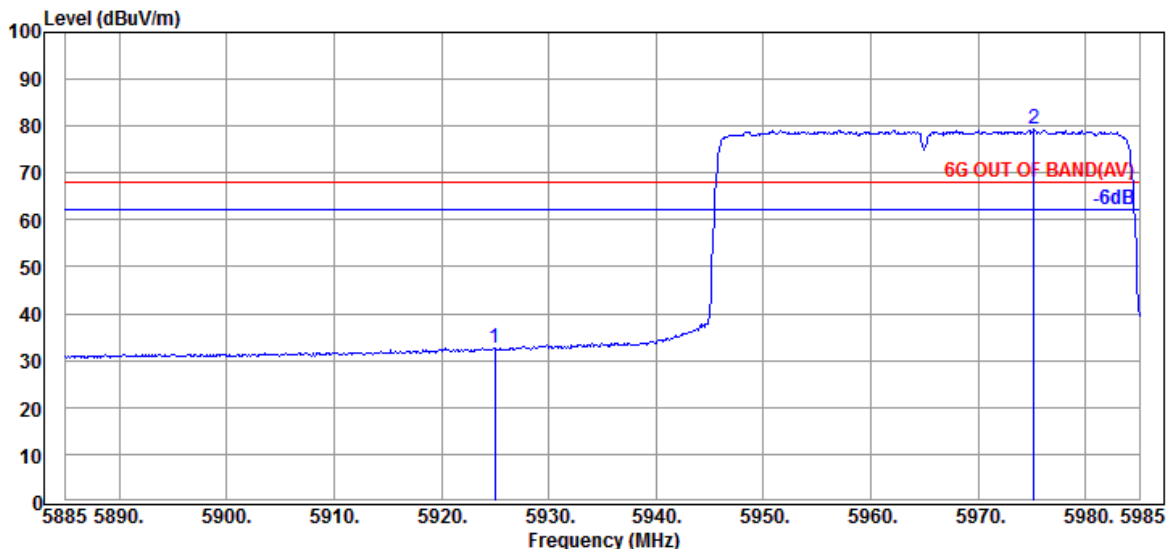


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40            | 21.99             | 32.62                   | 68.20           | 35.58       | Average  |
| @ 5975.200               | 35.63                 | 9.31            | 34.41            | 68.70             | 79.23                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

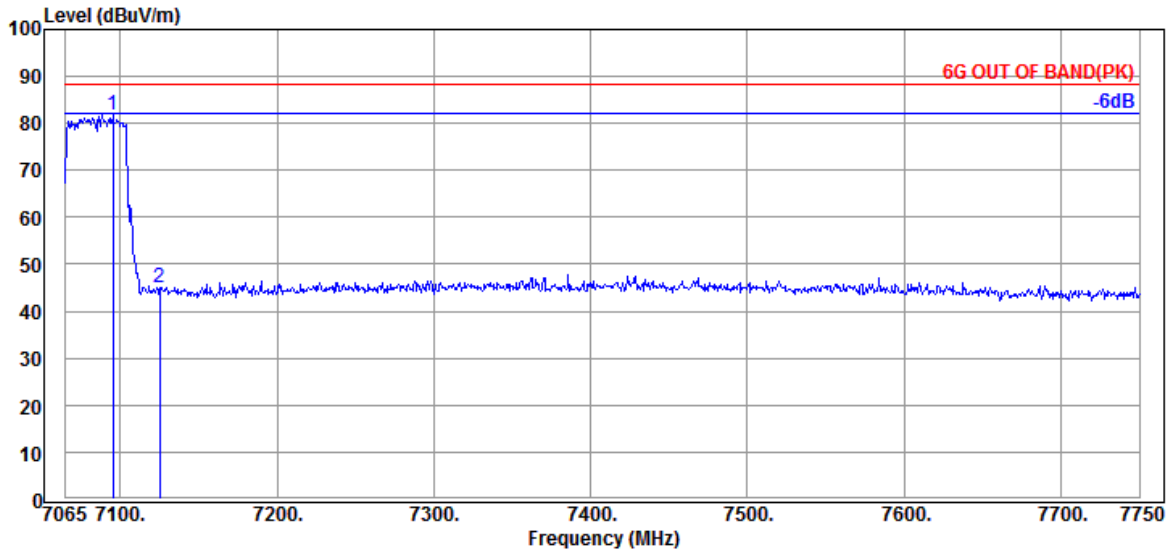

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7095.140                 | 35.50                 | 9.80            | 34.53            | 71.13             | 81.90                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 34.04             | 44.88                   | 88.20           | 43.32       | Peak     |

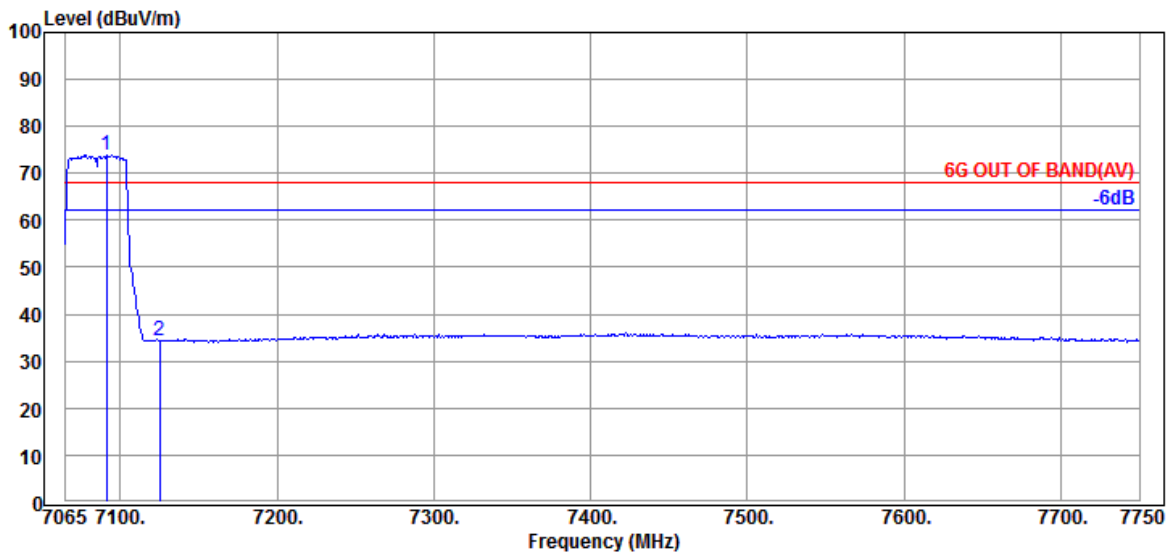

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7091.030                 | 35.50                 | 9.80            | 34.53            | 63.00             | 73.77                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 23.62             | 34.46                   | 68.20           | 33.74       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 8          |
|       |               | Frequency  | TX 7085MHz |

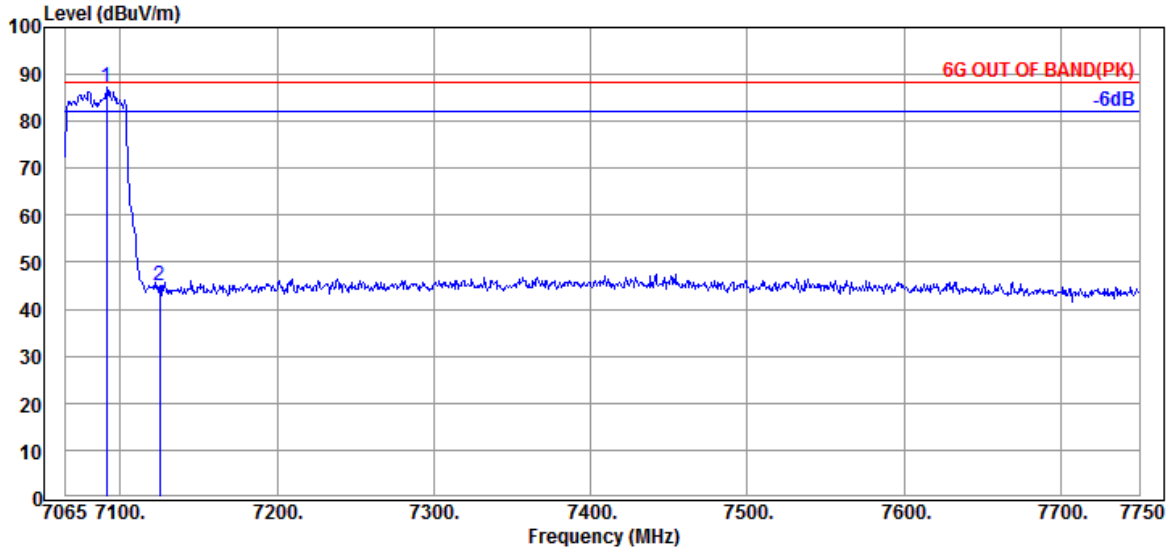

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7091.030               | 35.50                 | 9.80            | 34.53            | 76.55             | 87.32                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 34.20             | 45.04                   | 88.20           | 43.16       | Peak     |

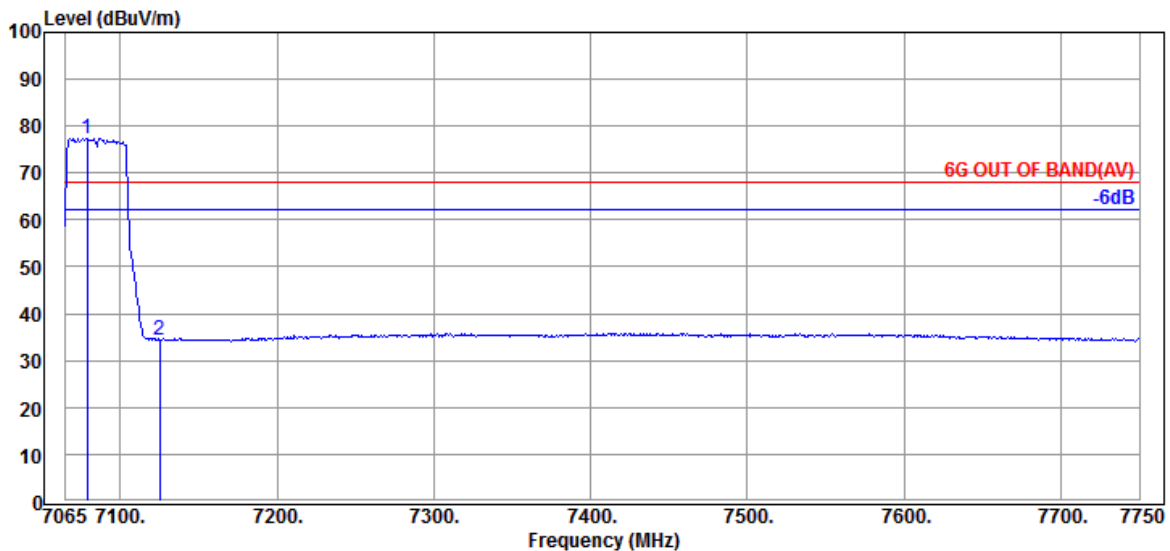


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7078.700               | 35.55                 | 9.78            | 34.52            | 66.65             | 77.46                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55            | 23.69             | 34.53                   | 68.20           | 33.67       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

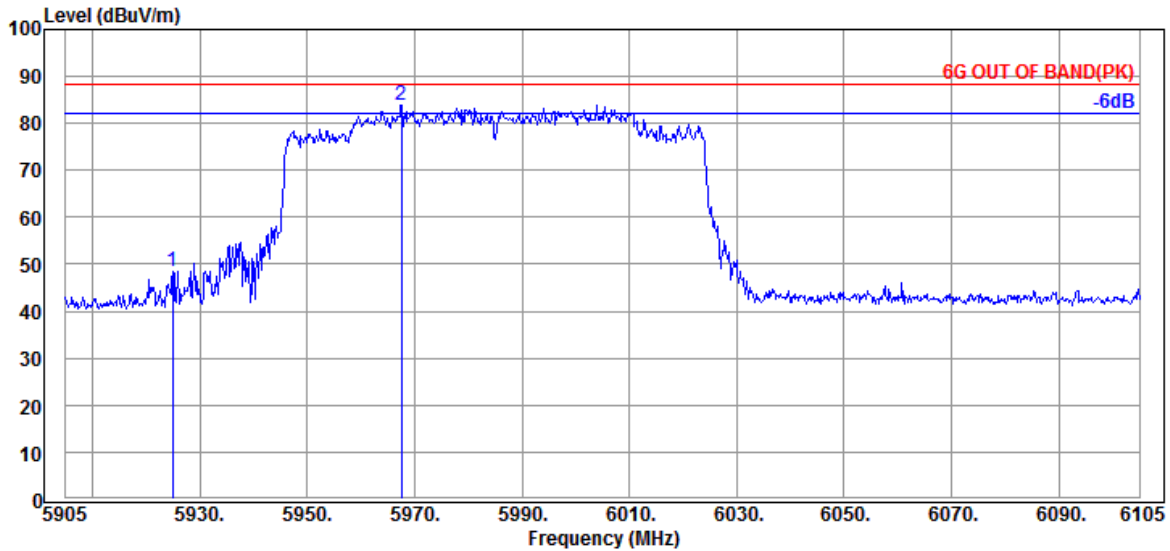

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 37.77             | 48.40                   | 88.20           | 39.80       | Peak     |
| @ 5967.600               | 35.63                 | 9.31            | 34.41                  | 73.31             | 83.84                   | ---             | ---         | Peak     |

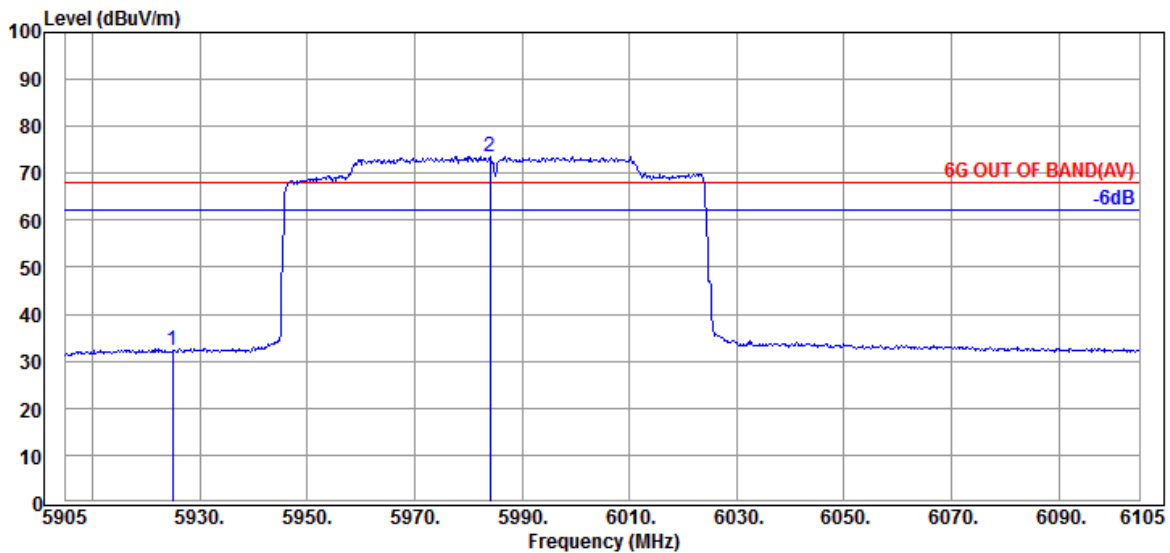

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 21.78             | 32.41                   | 68.20           | 35.79       | Average  |
| @ 5984.000               | 35.57                 | 9.32            | 34.42                  | 63.08             | 73.55                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

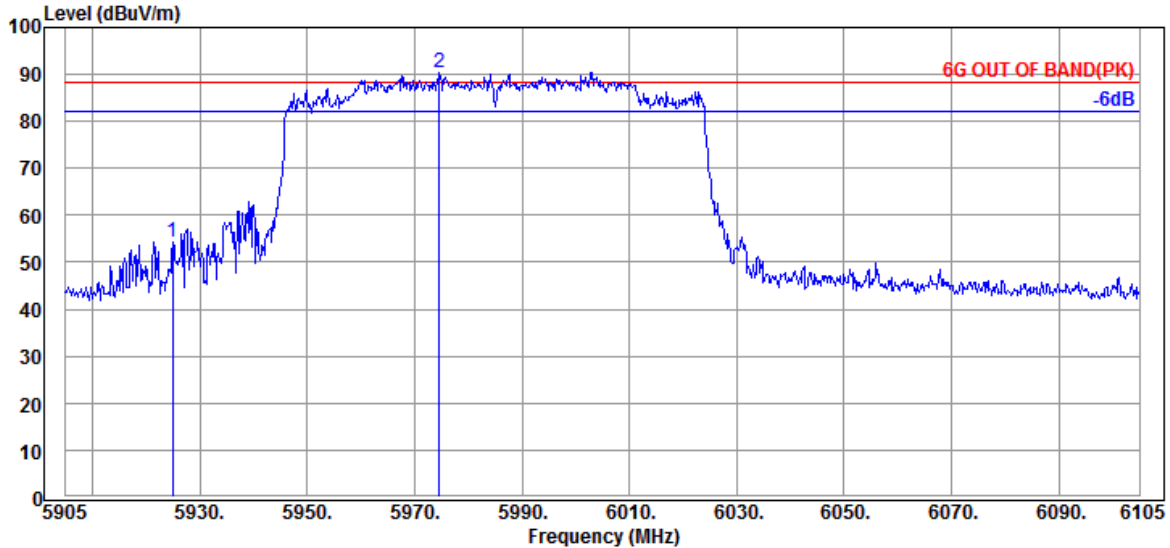

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 43.78             | 54.41                   | 88.20           | 33.79       | Peak     |
| @ 5974.600               | 35.63                 | 9.31            | 34.41                  | 79.97             | 90.50                   | ---             | ---         | Peak     |

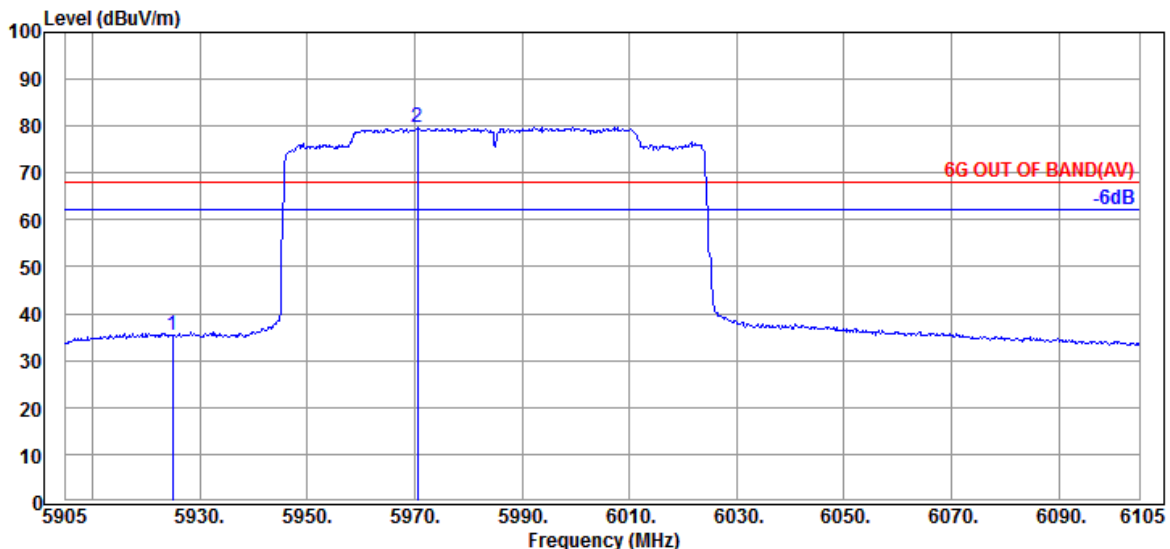


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 35.73                 | 9.30            | 34.40                  | 24.65             | 35.28                   | 68.20           | 32.92       | Average  |
| @ 5970.600               | 35.63                 | 9.31            | 34.41                  | 69.14             | 79.67                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.




|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

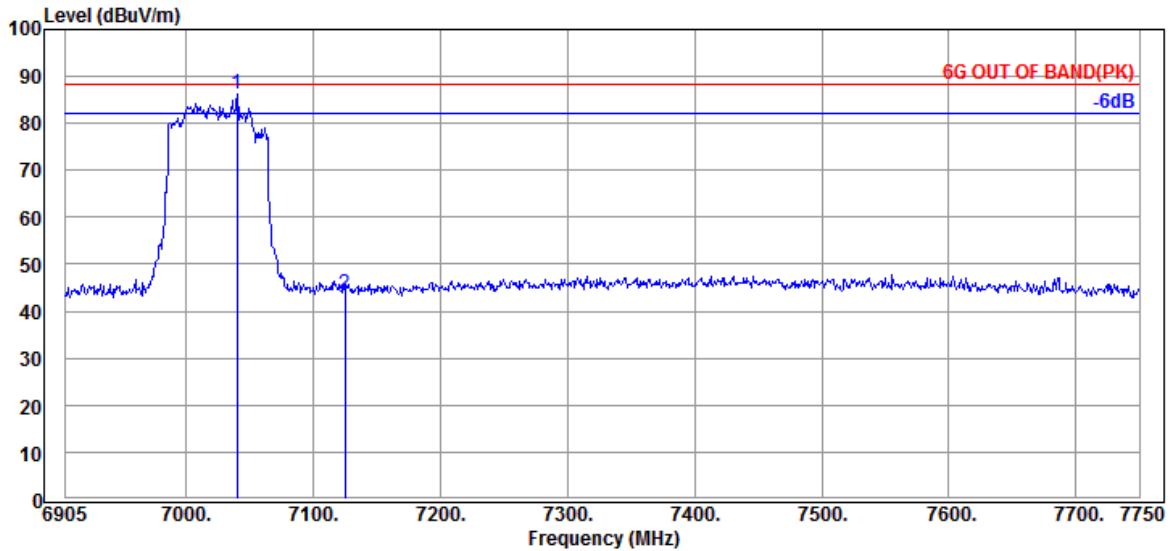

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7040.200                 | 35.73                 | 9.75            | 34.51            | 75.44             | 86.41                   | ---             | ---         | Peak     |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 32.89             | 43.73                   | 88.20           | 44.47       | Peak     |

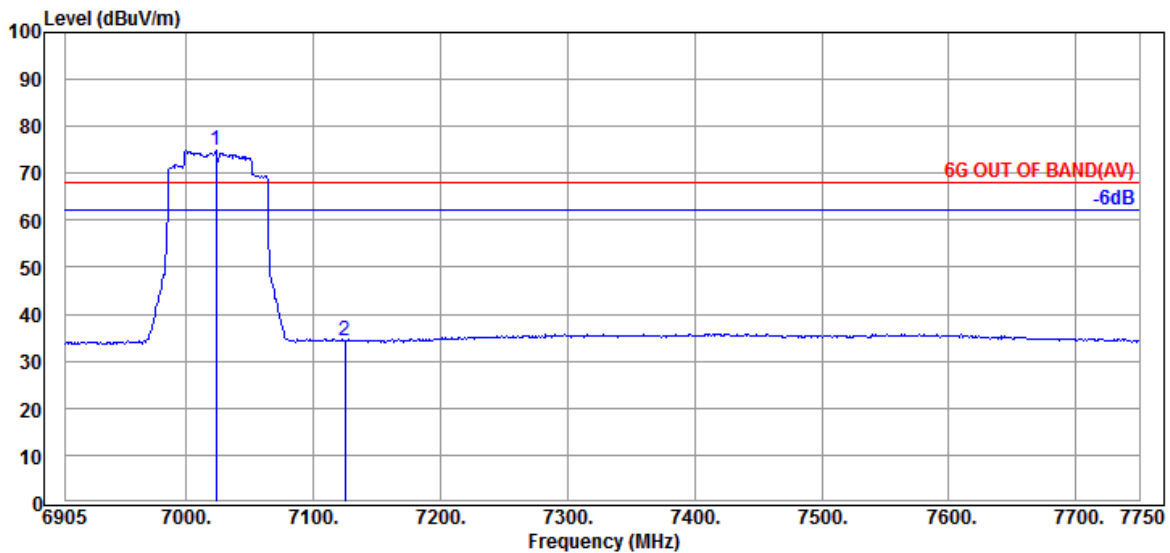


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 7023.300                 | 35.87                 | 9.73            | 34.49            | 63.72             | 74.83                   | ---             | ---         | Average  |
|   | 7125.000                 | 35.57                 | 9.82            | 34.55            | 23.67             | 34.51                   | 68.20           | 33.69       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

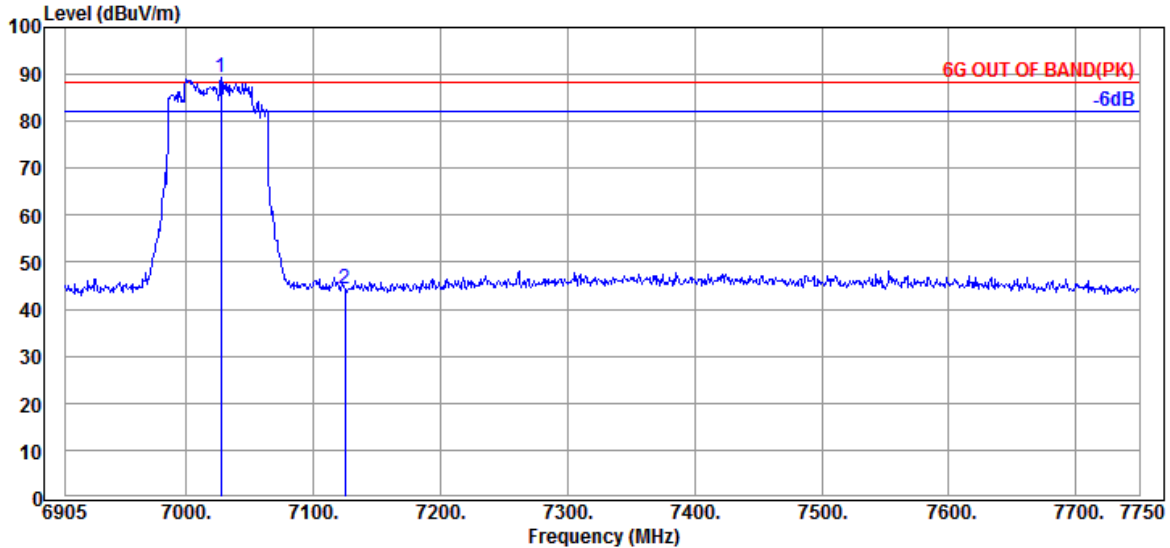

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7027.525               | 35.73                 | 9.75            | 34.49                  | 78.28             | 89.27                   | ---             | ---         | Peak     |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 33.63             | 44.47                   | 88.20           | 43.73       | Peak     |

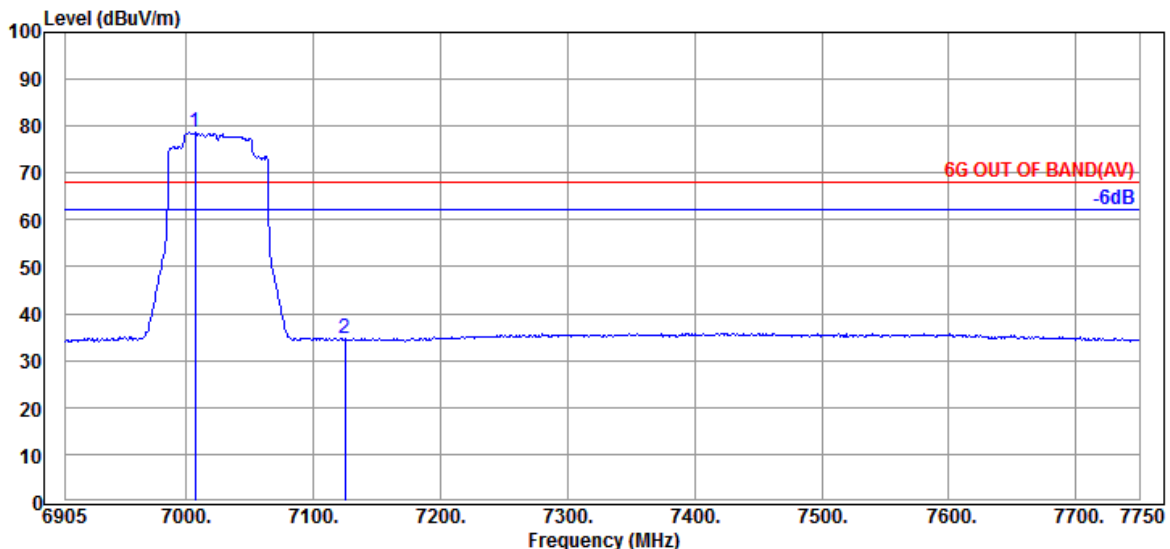

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.245               | 35.87                 | 9.73            | 34.48                  | 67.66             | 78.78                   | ---             | ---         | Average  |
| 7125.000                 | 35.57                 | 9.82            | 34.55                  | 23.75             | 34.59                   | 68.20           | 33.61       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Spot Check**


● **Test SKU #2 (with INPAQ Antenna and GM main board)**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

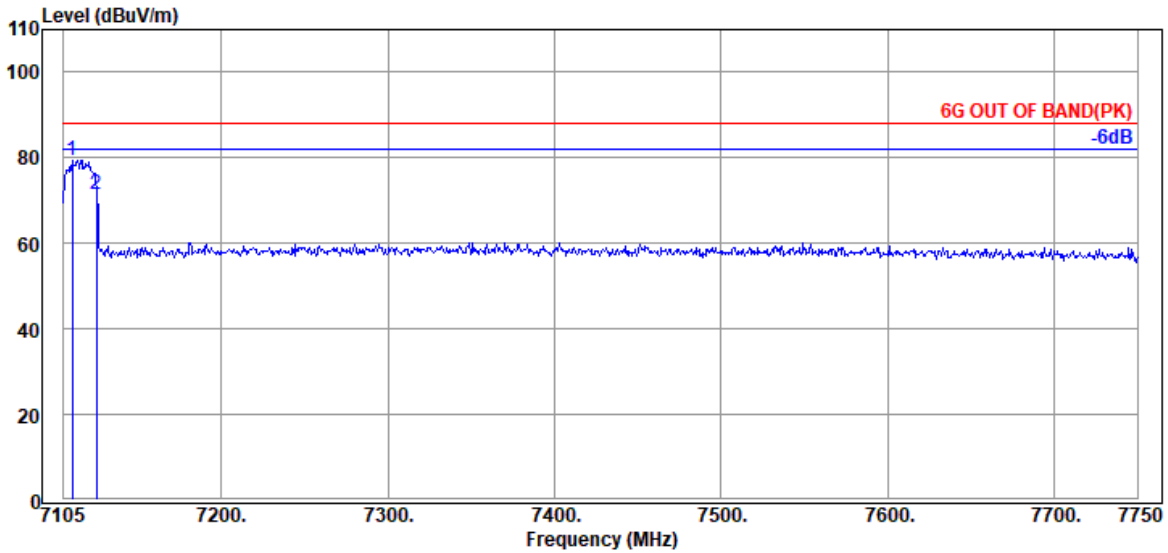

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7110.160               | 35.87                 | 9.82            | 39.50            | 73.36             | 79.55                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 65.18             | 71.37                   | 88.20           | 16.83       | Peak     |

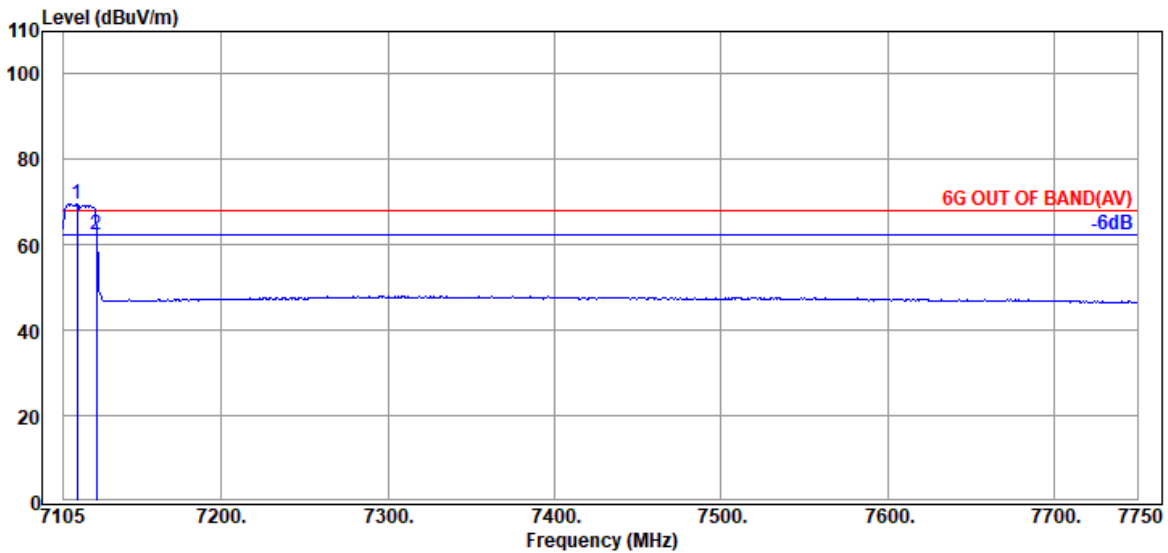


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7113.385               | 35.87                 | 9.82            | 39.50            | 63.45             | 69.64                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 56.13             | 62.32                   | 68.20           | 5.88        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

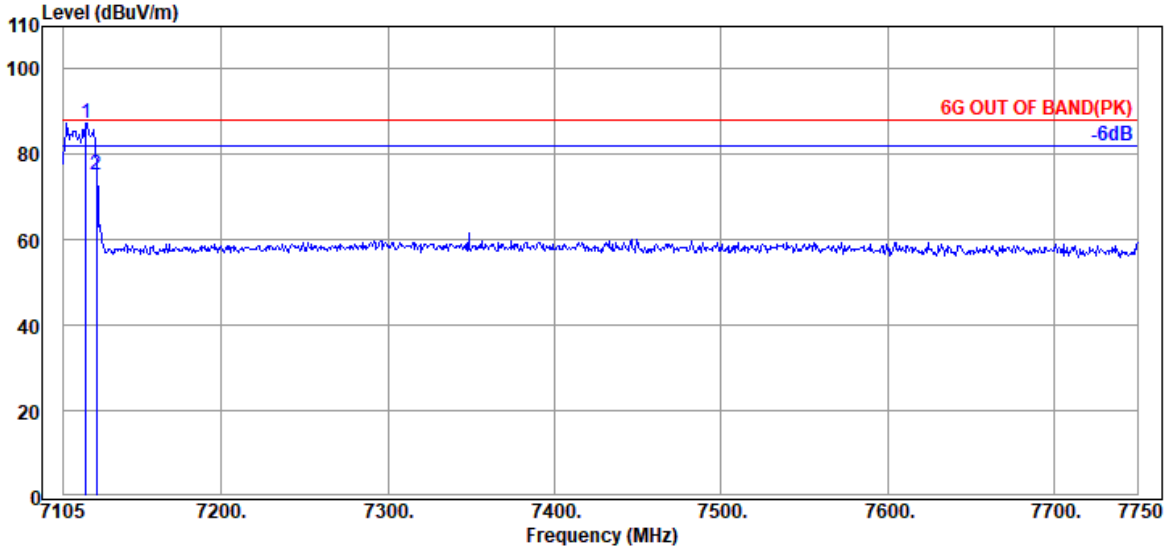

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7118.545               | 35.87                 | 9.82            | 39.50            | 81.11             | 87.30                   | ---             | ---         | Peak     |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 69.16             | 75.35                   | 88.20           | 12.85       | Peak     |

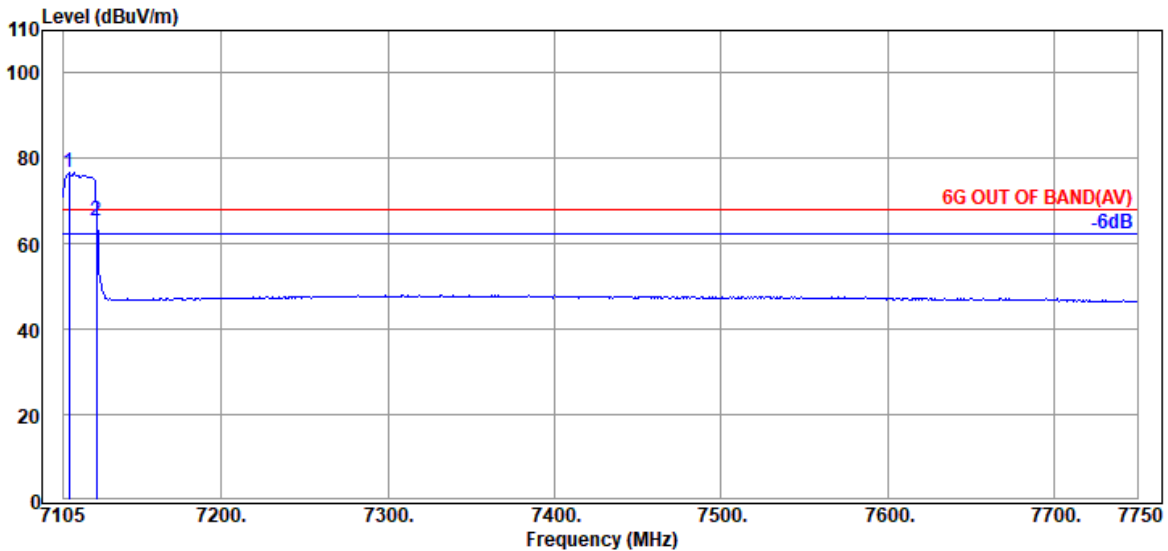

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7108.225               | 35.87                 | 9.82            | 39.49            | 70.66             | 76.86                   | ---             | ---         | Average  |
| 7125.000                 | 35.87                 | 9.82            | 39.50            | 59.26             | 65.45                   | 68.20           | 2.75        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Spot Check**


● **Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

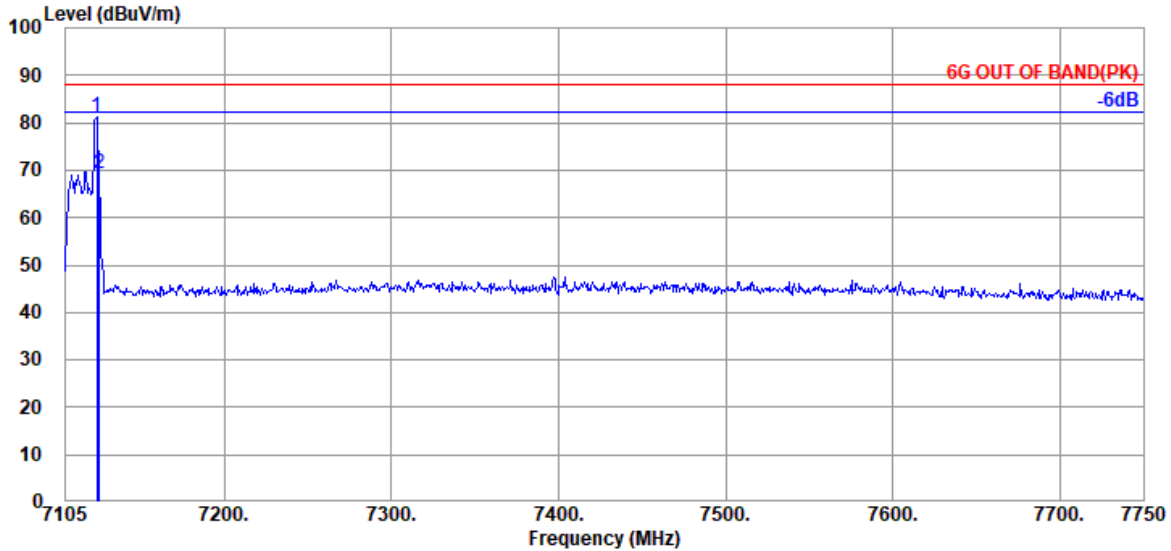

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.77                 | 9.82            | 34.55                  | 70.10             | 81.14                   | ---             | ---         | Peak     |
| 7124.995                 | 35.77                 | 9.82            | 34.55                  | 58.07             | 69.11                   | 88.20           | 19.09       | Peak     |

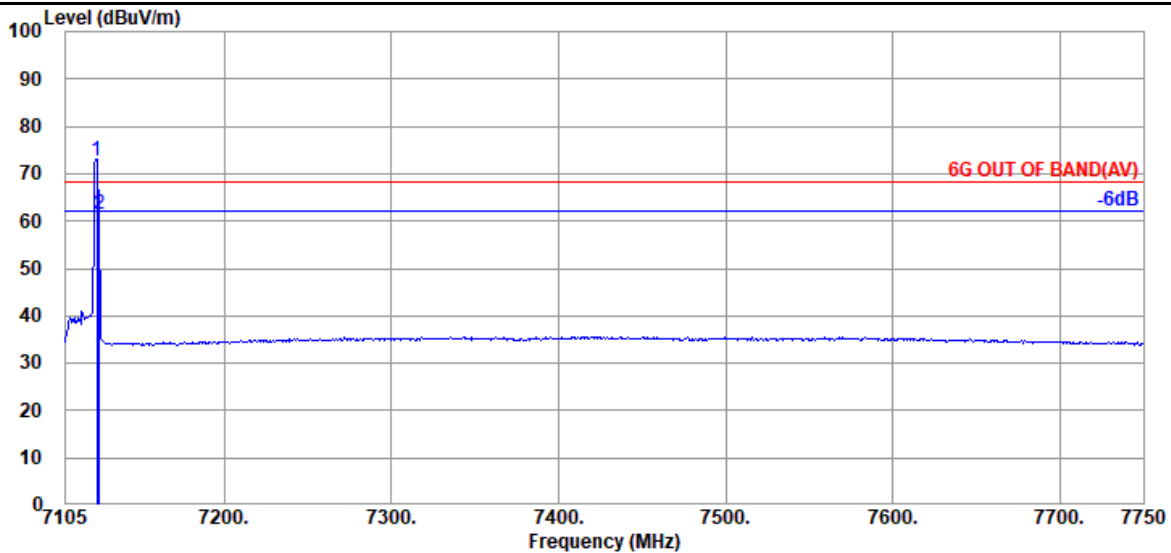


**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.77                 | 9.82            | 34.55                  | 61.64             | 72.68                   | ---             | ---         | Average  |
| 7124.995                 | 35.77                 | 9.82            | 34.55                  | 50.37             | 61.41                   | 68.20           | 6.79        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 8          |
| Mode  | 802.11ax-HE20 | U-NII Band | 8          |
|       |               | Frequency  | TX 7115MHz |

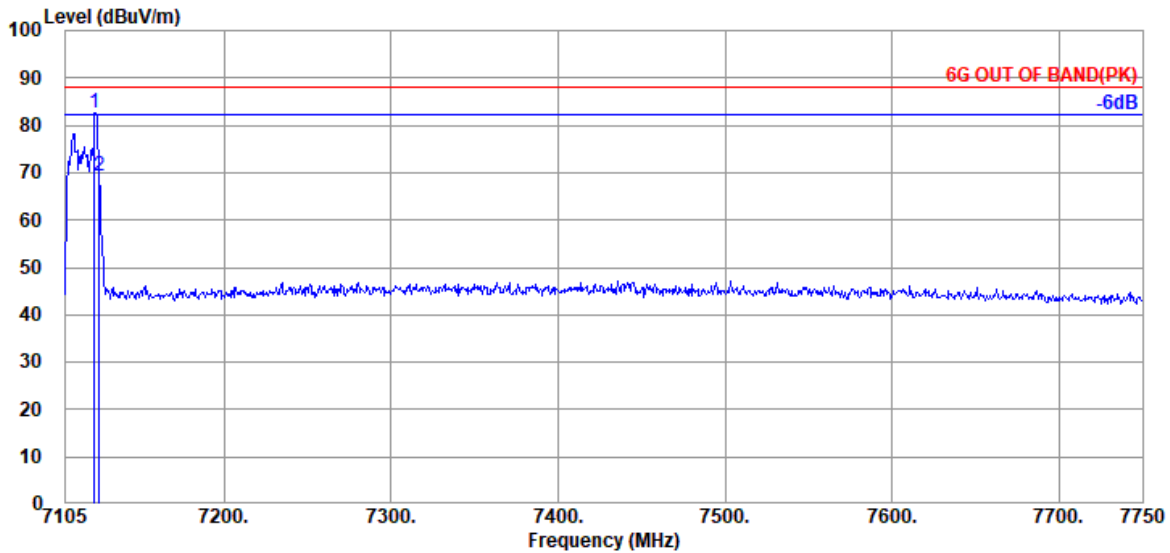

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7122.415               | 35.77                 | 9.82            | 34.55            | 71.64             | 82.68                   | 88.20           | ---         | Peak     |
| 7124.995                 | 35.77                 | 9.82            | 34.55            | 58.35             | 69.39                   | 88.20           | 18.81       | Peak     |

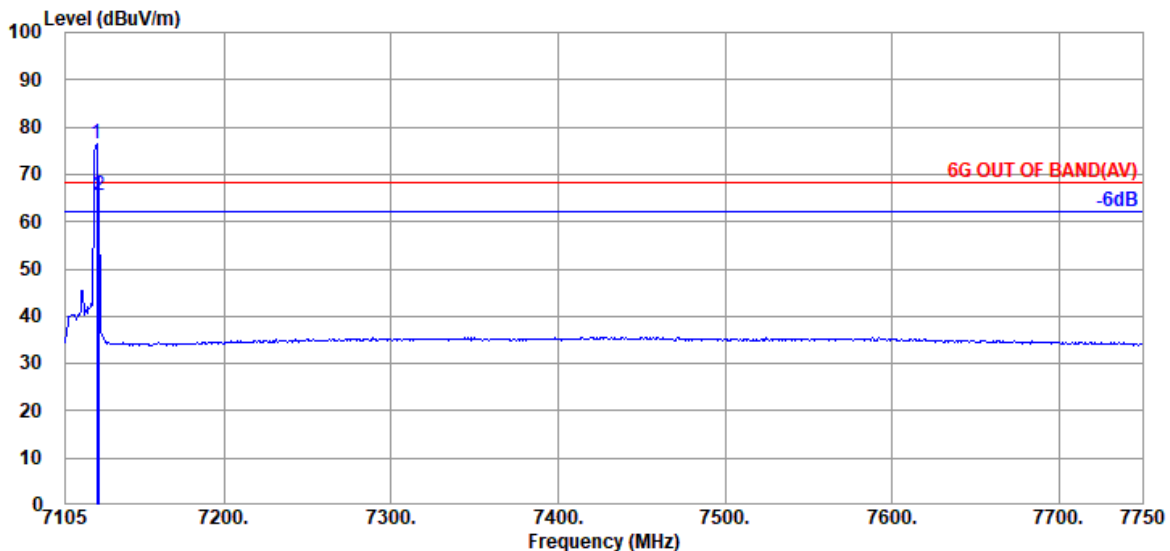

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.705               | 35.77                 | 9.82            | 34.55            | 65.34             | 76.38                   | ---             | ---         | Average  |
| 7124.995                 | 35.77                 | 9.82            | 34.55            | 54.43             | 65.47                   | 68.20           | 2.73        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

- **Test SKU #1 (with INPAQ Antenna and PM main board)**
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11910.000                | 38.80                 | 14.04           | 34.63            | 30.91             | 49.12                   | 54.00           | 4.88        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11910.000                | 38.80                 | 14.04           | 34.63            | 30.94             | 49.15                   | 54.00           | 4.85        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 6          |
|      |               | Frequency  | TX 6475MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12950.000                | 39.15                 | 14.97           | 33.39            | 29.86                   | 50.59                         | 54.00                 | 3.41        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12950.000                | 39.15                 | 14.97           | 33.39            | 29.88                   | 50.61                         | 54.00                 | 3.39        | Peak     |



|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6535MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13070.000                | 39.07                 | 15.07           | 33.28            | 30.54                   | 51.40                         | 54.00                 | 2.60        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13070.000                | 39.07                 | 15.07           | 33.28            | 29.86                   | 50.72                         | 54.00                 | 3.28        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 6875MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13750.000                | 38.80                 | 15.66           | 32.94            | 28.93                   | 50.45                         | 54.00                 | 3.55        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13750.000                | 38.80                 | 15.66           | 32.94            | 29.37                   | 50.89                         | 54.00                 | 3.11        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 14.07           | 34.63            | 30.48                   | 48.72                         | 54.00                 | 5.28        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 14.07           | 34.63            | 30.92                   | 49.16                         | 54.00                 | 4.84        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 6          |
|      |               | Frequency  | TX 6485MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12970.000                | 39.20                 | 15.00           | 33.39            | 29.90                   | 50.71                         | 54.00                 | 3.29        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12970.000                | 39.20                 | 15.00           | 33.39            | 29.47                   | 50.28                         | 54.00                 | 3.72        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 7          |
|      |               | Frequency  | TX 6525MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13050.000                | 39.07                 | 15.07           | 33.28            | 29.47                   | 50.33                         | 54.00                 | 3.67        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13050.000                | 39.07                 | 15.07           | 33.28            | 29.88                   | 50.74                         | 54.00                 | 3.26        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 29.82                   | 51.85                         | 54.00                 | 2.15        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 29.63                   | 51.66                         | 54.00                 | 2.34        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 30.97                   | 49.24                         | 54.00                 | 4.76        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 29.94                   | 48.21                         | 54.00                 | 5.79        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 6          |
|      |               | Frequency  | TX 6545MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12930.000                | 39.15                 | 14.97           | 33.46            | 29.70                   | 50.36                         | 54.00                 | 3.64        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12930.000                | 39.15                 | 14.97           | 33.46            | 29.91                   | 50.57                         | 54.00                 | 3.43        | Peak     |



|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 7          |
|      |               | Frequency  | TX 6625MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13250.000                | 39.15                 | 15.23           | 33.14            | 29.13                   | 50.37                         | 54.00                 | 3.63        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13250.000                | 39.15                 | 15.23           | 33.14            | 29.79                   | 51.03                         | 54.00                 | 2.97        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 15.89           | 32.99            | 29.14                   | 51.11                         | 54.00                 | 2.89        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 15.89           | 32.99            | 29.61                   | 51.58                         | 54.00                 | 2.42        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6185MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 14.17           | 34.58            | 30.21                   | 48.67                         | 54.00                 | 5.33        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 14.17           | 34.58            | 30.64                   | 49.10                         | 54.00                 | 4.90        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 6          |
|      |                | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13010.000                | 39.13                 | 15.03           | 33.32            | 28.99                   | 49.83                         | 54.00                 | 4.17        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13010.000                | 39.13                 | 15.03           | 33.32            | 29.83                   | 50.67                         | 54.00                 | 3.33        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 7          |
|      |                | Frequency  | TX 6665MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13330.000                | 39.23                 | 15.30           | 33.07            | 29.24                   | 50.70                         | 54.00                 | 3.30        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13330.000                | 39.23                 | 15.30           | 33.07            | 29.63                   | 51.09                         | 54.00                 | 2.91        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 15.83           | 32.94            | 29.68                   | 51.57                         | 54.00                 | 2.43        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 15.83           | 32.94            | 30.01                   | 51.90                         | 54.00                 | 2.10        | Peak     |

## ● OFDMA Modulation

|       |               |            |         |
|-------|---------------|------------|---------|
| Tones | 26T           | RU Index   | 18      |
| Mode  | 802.11ax-HE80 | U-NII Band | 5       |
|       |               | Frequency  | TX 5985 |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 29.50                   | 47.77                         | 54.00                 | 6.23        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 28.52                   | 46.79                         | 54.00                 | 7.21        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 29.21                   | 47.48                         | 54.00                 | 6.52        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 30.14                   | 48.41                         | 54.00                 | 5.59        | Peak     |



|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 29.63                   | 47.90                         | 54.00                 | 6.10        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 14.11           | 34.64            | 28.60                   | 46.87                         | 54.00                 | 7.13        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 14.17           | 34.58            | 30.28                   | 48.74                         | 54.00                 | 5.26        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 14.17           | 34.58            | 29.59                   | 48.05                         | 54.00                 | 5.95        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 14.07           | 34.63            | 30.58                   | 48.82                         | 54.00                 | 5.18        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 14.07           | 34.63            | 30.51                   | 48.75                         | 54.00                 | 5.25        | Peak     |

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6185MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.68                   | 49.78                         | 54.00                 | 4.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.60                   | 49.70                         | 54.00                 | 4.30        | Peak     |

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

- **Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)**
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11910.000                | 38.80                 | 16.41           | 34.63            | 28.00                   | 48.58                         | 54.00                 | 5.42        | Peak     |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11910.000                | 38.80                 | 16.41           | 34.63            | 27.28                   | 47.86                         | 54.00                 | 6.14        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 6          |
|      |               | Frequency  | TX 6475MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12950.000                | 39.15                 | 16.96           | 33.39            | 28.02                   | 50.74                         | 54.00                 | 3.26        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12950.000                | 39.15                 | 16.96           | 33.39            | 27.70                   | 50.42                         | 54.00                 | 3.58        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6535MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13710.000                | 38.80                 | 17.08           | 32.93            | 27.81                   | 50.76                         | 54.00                 | 3.24        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13710.000                | 38.80                 | 17.08           | 32.93            | 27.99                   | 50.94                         | 54.00                 | 3.06        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 6875MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13750.000                | 38.80                 | 17.09           | 32.94            | 27.61                   | 50.56                         | 54.00                 | 3.44        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13750.000                | 38.80                 | 17.09           | 32.94            | 27.74                   | 50.69                         | 54.00                 | 3.31        | Peak     |



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 38.80                 | 16.46           | 34.63            | 28.29             | 48.92                   | 54.00           | 5.08        | Peak     |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 38.80                 | 16.46           | 34.63            | 27.24             | 47.87                   | 54.00           | 6.13        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 6          |
|      |               | Frequency  | TX 6485MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12970.000                | 39.20                 | 16.96           | 33.39            | 27.56                   | 50.33                         | 54.00                 | 3.67        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12970.000                | 39.20                 | 16.96           | 33.39            | 27.60                   | 50.37                         | 54.00                 | 3.63        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 7          |
|      |               | Frequency  | TX 6525MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13690.000                | 38.83                 | 17.08           | 32.93            | 28.44                   | 51.42                         | 54.00                 | 2.58        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13690.000                | 38.83                 | 17.08           | 32.93            | 27.53                   | 50.51                         | 54.00                 | 3.49        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 17.26           | 33.14            | 28.66                   | 51.98                         | 54.00                 | 2.02        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 17.26           | 33.14            | 28.79                   | 52.11                         | 54.00                 | 1.89        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.33                   | 47.95                         | 54.00                 | 6.05        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.20                   | 47.82                         | 54.00                 | 6.18        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 6          |
|      |               | Frequency  | TX 6545MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12930.000                | 39.15                 | 16.92           | 33.46            | 28.01                   | 50.62                         | 54.00                 | 3.38        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12930.000                | 39.15                 | 16.92           | 33.46            | 27.93                   | 50.54                         | 54.00                 | 3.46        | Peak     |

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 7          |
|      |               | Frequency  | TX 6625MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13250.000                | 39.15                 | 17.00           | 33.14            | 27.63             | 50.64                   | 54.00           | 3.36        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13250.000                | 39.15                 | 17.00           | 33.14            | 28.68             | 51.69                   | 54.00           | 2.31        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 17.14           | 32.99            | 27.97                   | 51.19                         | 54.00                 | 2.81        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 17.14           | 32.99            | 28.35                   | 51.57                         | 54.00                 | 2.43        | Peak     |



|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6185MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 16.66           | 34.29            | 28.70                   | 50.00                         | 54.00                 | 4.00        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 16.66           | 34.29            | 29.06                   | 50.36                         | 54.00                 | 3.64        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 6          |
|      |                | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13010.000                | 39.13                 | 16.96           | 33.32            | 28.21                   | 50.98                         | 54.00                 | 3.02        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13010.000                | 39.13                 | 16.96           | 33.32            | 27.40                   | 50.17                         | 54.00                 | 3.83        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 7          |
|      |                | Frequency  | TX 6665MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13650.000                | 38.87                 | 17.08           | 32.93            | 28.10                   | 51.12                         | 54.00                 | 2.88        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13650.000                | 38.87                 | 17.08           | 32.93            | 29.03                   | 52.05                         | 54.00                 | 1.95        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 17.12           | 32.94            | 28.80                   | 51.98                         | 54.00                 | 2.02        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 17.12           | 32.94            | 28.16                   | 51.34                         | 54.00                 | 2.66        | Peak     |

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

- **Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)**
- OFDMA Modulation

|       |               |            |         |
|-------|---------------|------------|---------|
| Tones | 26T           | RU Index   | 18      |
| Mode  | 802.11ax-HE80 | U-NII Band | 5       |
|       |               | Frequency  | TX 5985 |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 28.29             | 48.91                   | 54.00           | 5.09        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.73             | 48.35                   | 54.00           | 5.65        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 44         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.00                   | 47.62                         | 54.00                 | 6.38        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.44                   | 48.06                         | 54.00                 | 5.94        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 56         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11959.000                | 38.80                 | 16.46           | 34.64            | 28.15                   | 48.77                         | 54.00                 | 5.23        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11970.000                | 38.80                 | 16.46           | 34.64            | 27.73                   | 48.35                         | 54.00                 | 5.65        | Peak     |

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 62         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 16.51           | 34.58            | 27.08                   | 47.88                         | 54.00                 | 6.12        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12050.000                | 38.87                 | 16.51           | 34.58            | 27.68                   | 48.48                         | 54.00                 | 5.52        | Peak     |



|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 65         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 16.46           | 34.63            | 27.39                   | 48.02                         | 54.00                 | 5.98        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11930.000                | 38.80                 | 16.46           | 34.63            | 27.94                   | 48.57                         | 54.00                 | 5.43        | Peak     |

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6185MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 16.66           | 34.29            | 30.43                   | 51.73                         | 54.00                 | 2.27        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 16.66           | 34.29            | 28.66                   | 49.96                         | 54.00                 | 4.04        | Peak     |

**Spot Check**

- **Test SKU #2 (with INPAQ Antenna and GM main board)**
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6535MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13070.000                | 39.07                 | 15.07           | 33.28            | 29.80                   | 50.66                         | 54.00                 | 3.34        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13070.000                | 39.07                 | 15.07           | 33.28            | 29.32                   | 50.18                         | 54.00                 | 3.82        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 29.44                   | 51.47                         | 54.00                 | 2.53        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 29.54                   | 51.57                         | 54.00                 | 2.43        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 15.89           | 32.99            | 29.11                   | 51.08                         | 54.00                 | 2.92        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14050.000                | 39.07                 | 15.89           | 32.99            | 29.53                   | 51.50                         | 54.00                 | 2.50        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 15.83           | 32.94            | 28.80                   | 50.69                         | 54.00                 | 3.31        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13970.000                | 39.00                 | 15.83           | 32.94            | 28.35                   | 50.24                         | 54.00                 | 3.76        | Peak     |

## ● OFDMA Modulation

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6185MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.30                   | 49.40                         | 54.00                 | 4.60        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.59                   | 49.69                         | 54.00                 | 4.31        | Peak     |

- **Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)**
- OFDM Modulation

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6855MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13710.000                | 38.80                 | 15.63           | 32.93            | 28.44                   | 49.94                         | 54.00                 | 4.06        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13710.000                | 38.80                 | 15.63           | 32.93            | 28.92                   | 50.42                         | 54.00                 | 3.58        | Peak     |



|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 28.98                   | 51.01                         | 54.00                 | 2.99        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 14170.000                | 39.20                 | 15.97           | 33.14            | 29.28                   | 51.31                         | 54.00                 | 2.69        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 7          |
|      |               | Frequency  | TX 6625MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13250.000                | 39.15                 | 15.23           | 33.14            | 28.53                   | 49.77                         | 54.00                 | 4.23        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13250.000                | 39.15                 | 15.23           | 33.14            | 29.41                   | 50.65                         | 54.00                 | 3.35        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6825MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13650.000                | 38.87                 | 15.56           | 32.93            | 29.32                   | 50.82                         | 54.00                 | 3.18        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 13650.000                | 38.87                 | 15.56           | 32.93            | 29.33                   | 50.83                         | 54.00                 | 3.17        | Peak     |

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

● OFDMA Modulation

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6185MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.59             | 49.69                   | 54.00           | 4.31        | Peak     |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12370.000                | 38.93                 | 14.46           | 34.29            | 30.77             | 49.87                   | 54.00           | 4.13        | Peak     |

### A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.