


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	184
A.2.3 Emissions in Non-restricted Frequency Bands:.....	191
A.3 DTS/OCCUPIED BANDWIDTH	192
A.3.1 DTS/Occupied Bandwidth Result.....	192
A.3.2 Measurement Plots	194
A.4 MAXIMUM PEAK OUTPUT POWER	210
A.4.1 Peak Output Power	210
A.4.2 Average Output Power (Reporting only).....	218
A.5 EMISSION LIMITATIONS	224
A.6 POWER SPECTRAL DENSITY	256
A.6.1 Power Spectral Density Result	256
A.6.2 Measurement Plots	259

A.1 CONDUCTED EMISSION

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1 (with INPOAQ ANT)		

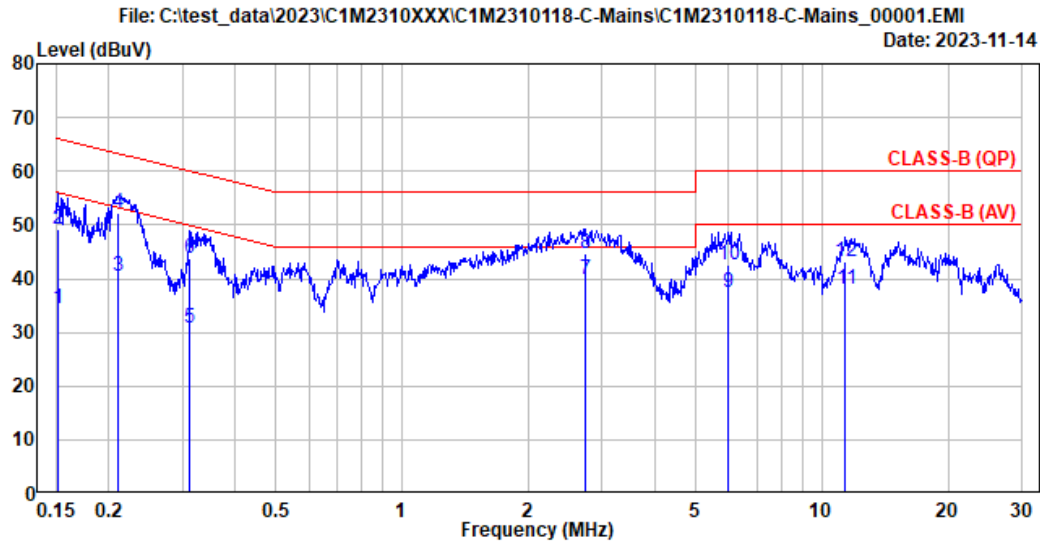


Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.30	0.03	9.85	14.37	34.55	55.92	21.37	Average
2	0.152	10.30	0.03	9.85	29.02	49.20	65.92	16.72	QP
3	0.211	10.29	0.03	9.85	20.19	40.36	53.18	12.82	Average
4	0.211	10.29	0.03	9.85	31.99	52.16	63.18	11.02	QP
5	0.312	10.28	0.03	9.85	10.58	30.74	49.91	19.17	Average
6	0.312	10.28	0.03	9.85	23.47	43.63	59.91	16.28	QP
7	2.742	10.34	0.07	9.86	19.58	39.85	46.00	6.15	Average
8	2.742	10.34	0.07	9.86	24.53	44.80	56.00	11.20	QP
9	5.997	10.45	0.10	9.87	17.01	37.43	50.00	12.57	Average
10	5.997	10.45	0.10	9.87	22.22	42.64	60.00	17.36	QP
11	11.407	10.65	0.15	9.90	17.32	38.02	50.00	11.98	Average
12	11.407	10.65	0.15	9.90	22.40	43.10	60.00	16.90	QP

Remarks: 1. Emission Level(dBμV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1 (with INPOAQ ANT)		

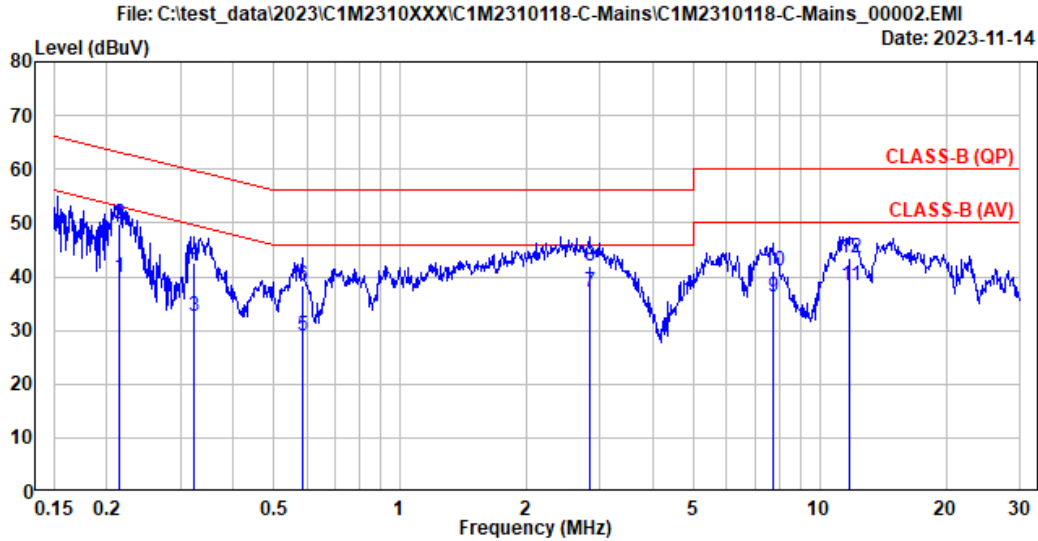

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.215	10.28	0.03	9.85	19.73	39.89	53.02	13.13	Average
2	0.215	10.28	0.03	9.85	29.67	49.83	63.02	13.19	QP
3	0.323	10.27	0.03	9.85	12.59	32.74	49.62	16.88	Average
4	0.323	10.27	0.03	9.85	22.37	42.52	59.62	17.10	QP
5	0.585	10.27	0.03	9.85	8.73	28.88	46.00	17.12	Average
6	0.585	10.27	0.03	9.85	18.06	38.21	56.00	17.79	QP
7	2.825	10.31	0.07	9.86	16.74	36.98	46.00	9.02	Average
8	2.825	10.31	0.07	9.86	21.64	41.88	56.00	14.12	QP
9	7.771	10.42	0.12	9.88	15.74	36.16	50.00	13.84	Average
10	7.771	10.42	0.12	9.88	20.68	41.10	60.00	18.90	QP
11	11.812	10.52	0.15	9.90	17.69	38.26	50.00	11.74	Average
12	11.812	10.52	0.15	9.90	22.80	43.37	60.00	16.63	QP

Remarks: 1. Emission Level(dBμV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

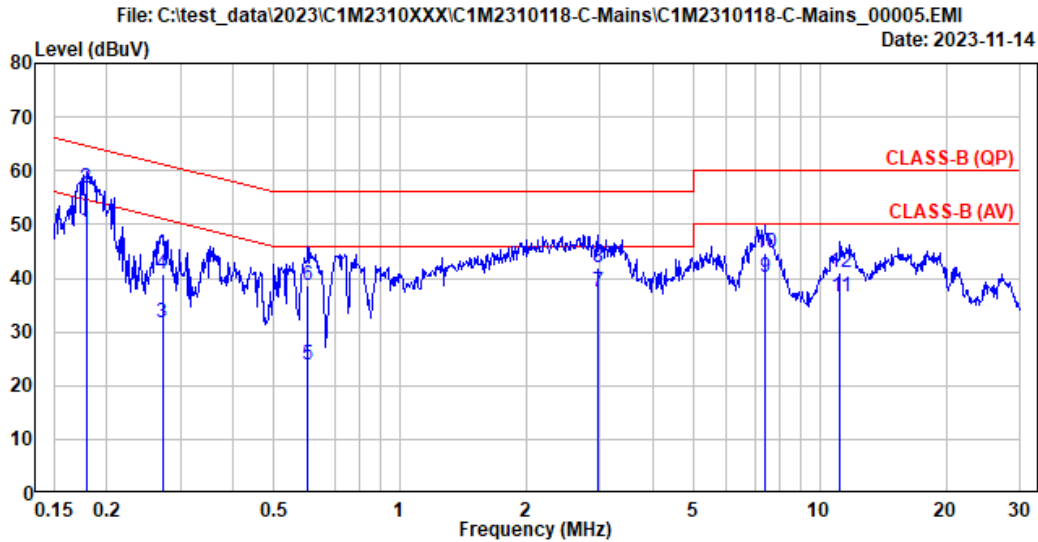

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.179	10.29	0.03	9.85	28.73	48.90	54.55	5.65	Average
2	0.179	10.29	0.03	9.85	36.61	56.78	64.55	7.77	QP
3	0.271	10.29	0.03	9.85	11.46	31.63	51.07	19.44	Average
4	0.271	10.29	0.03	9.85	20.65	40.82	61.07	20.25	QP
5	0.603	10.28	0.03	9.85	3.68	23.84	46.00	22.16	Average
6	0.603	10.28	0.03	9.85	18.49	38.65	56.00	17.35	QP
7	2.955	10.34	0.07	9.86	17.15	37.42	46.00	8.58	Average
8	2.955	10.34	0.07	9.86	21.62	41.89	56.00	14.11	QP
9	7.430	10.50	0.11	9.87	19.72	40.20	50.00	9.80	Average
10	7.430	10.50	0.11	9.87	24.29	44.77	60.00	15.23	QP
11	11.182	10.64	0.15	9.90	15.69	36.38	50.00	13.62	Average
12	11.182	10.64	0.15	9.90	20.48	41.17	60.00	18.83	QP

Remarks: 1. Emission Level(dBµV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

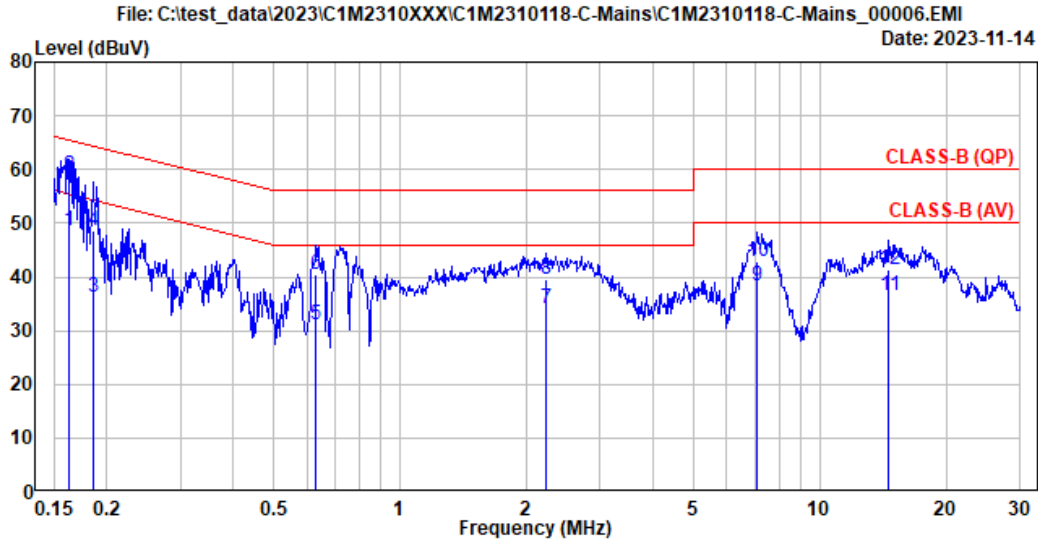

Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17290SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.163	10.29	0.03	9.85	28.57	48.74	55.30	6.56	Average
2	0.163	10.29	0.03	9.85	38.56	58.73	65.30	6.57	QP
3	0.186	10.29	0.03	9.85	15.92	36.09	54.22	18.13	Average
4	0.186	10.29	0.03	9.85	28.40	48.57	64.22	15.65	QP
5	0.630	10.27	0.03	9.85	11.02	31.17	46.00	14.83	Average
6	0.630	10.27	0.03	9.85	20.23	40.38	56.00	15.62	QP
7	2.224	10.30	0.06	9.86	13.85	34.07	46.00	11.93	Average
8	2.224	10.30	0.06	9.86	19.39	39.61	56.00	16.39	QP
9	7.069	10.41	0.11	9.87	17.82	38.21	50.00	11.79	Average
10	7.069	10.41	0.11	9.87	22.58	42.97	60.00	17.03	QP
11	14.636	10.60	0.17	9.91	15.78	36.46	50.00	13.54	Average
12	14.636	10.60	0.17	9.91	20.65	41.33	60.00	18.67	QP

Remarks: 1. Emission Level(dBµV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2023/10/17 ~ 11/14	Temp./Hum.	24 ~ 26°C/53 ~ 56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.617	23.36	1.23	26.52	30.91	28.98	40.00	11.02	Peak
158.525	16.07	2.96	25.98	41.93	34.98	43.50	8.52	Peak
217.533	16.34	3.58	25.78	43.04	37.18	46.00	8.82	Peak
608.767	24.37	6.81	27.41	33.02	36.78	46.00	9.22	Peak
907.850	26.29	8.77	27.02	32.91	40.95	46.00	5.05	Peak
987.067	26.86	9.20	26.79	32.84	42.11	54.00	11.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	31.13	29.48	40.00	10.52	Peak
79.308	12.95	2.03	26.37	45.08	33.70	40.00	6.30	Peak
162.567	15.91	3.01	25.96	38.58	31.53	43.50	11.97	Peak
431.742	22.09	5.81	26.73	34.53	35.70	46.00	10.30	Peak
925.633	26.42	8.87	26.97	32.82	41.15	46.00	4.85	Peak
974.133	26.77	9.13	26.83	32.22	41.29	54.00	12.71	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	30.75	29.38	40.00	10.62	Peak
158.525	16.07	2.96	25.98	41.89	34.94	43.50	8.56	Peak
218.342	16.38	3.58	25.78	43.74	37.94	46.00	8.06	Peak
824.592	25.31	8.15	27.22	32.96	39.21	46.00	6.79	Peak
916.742	26.36	8.82	26.99	33.53	41.71	46.00	4.29	Peak
995.958	26.93	9.25	26.77	32.42	41.83	54.00	12.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	31.84	30.47	40.00	9.53	Peak
79.308	12.95	2.03	26.37	45.22	33.83	40.00	6.17	Peak
160.142	16.00	2.98	25.97	40.03	33.05	43.50	10.45	Peak
424.467	21.98	5.75	26.68	35.24	36.28	46.00	9.72	Peak
884.408	26.05	8.61	27.08	33.29	40.87	46.00	5.13	Peak
994.342	26.92	9.24	26.78	32.65	42.04	54.00	11.96	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	30.95	29.58	40.00	10.42	Peak
119.725	17.87	2.53	26.18	35.62	29.84	43.50	13.66	Peak
430.125	22.06	5.80	26.72	33.75	34.89	46.00	11.11	Peak
766.392	24.90	7.74	27.32	34.45	39.78	46.00	6.22	Peak
913.508	26.34	8.80	27.00	33.28	41.41	46.00	4.59	Peak
982.217	26.83	9.18	26.81	32.39	41.59	54.00	12.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	38.16	36.50	40.00	3.50	Peak
131.042	17.48	2.66	26.11	39.63	33.65	43.50	9.85	Peak
425.275	21.99	5.75	26.69	37.42	38.48	46.00	7.52	Peak
657.267	24.54	7.08	27.40	32.88	37.10	46.00	8.90	Peak
898.150	26.20	8.71	27.04	32.30	40.17	46.00	5.83	Peak
1000.000	26.95	9.27	26.76	32.27	41.73	54.00	12.27	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	30.89	29.52	40.00	10.48	Peak
119.725	17.87	2.53	26.18	37.05	31.27	43.50	12.23	Peak
500.450	23.13	6.40	27.16	33.40	35.77	46.00	10.23	Peak
787.408	24.96	7.87	27.29	32.59	38.12	46.00	7.88	Peak
918.358	26.36	8.83	26.99	32.77	40.97	46.00	5.03	Peak
970.092	26.73	9.11	26.84	33.10	42.10	54.00	11.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	37.40	36.03	40.00	3.97	Peak
134.275	17.36	2.70	26.10	39.32	33.28	43.50	10.22	Peak
433.358	22.13	5.83	26.74	35.08	36.29	46.00	9.71	Peak
734.058	24.80	7.53	27.36	32.78	37.75	46.00	8.25	Peak
924.017	26.41	8.86	26.97	32.84	41.14	46.00	4.86	Peak
988.683	26.87	9.21	26.79	32.54	41.83	54.00	12.17	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
33.233	22.77	1.27	26.52	30.73	28.24	40.00	11.76	Peak
160.142	16.00	2.98	25.97	41.83	34.85	43.50	8.65	Peak
221.575	16.57	3.62	25.77	42.70	37.12	46.00	8.88	Peak
544.100	23.69	6.57	27.28	31.72	34.70	46.00	11.30	Peak
697.683	24.68	7.29	27.40	31.71	36.27	46.00	9.73	Peak
991.108	26.89	9.22	26.78	31.69	41.02	54.00	12.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
77.692	12.82	2.01	26.38	44.28	32.73	40.00	7.27	Peak
164.992	15.83	3.03	25.95	38.18	31.09	43.50	12.41	Peak
500.450	23.13	6.40	27.16	32.02	34.39	46.00	11.61	Peak
681.517	24.63	7.21	27.40	31.62	36.05	46.00	9.95	Peak
820.550	25.26	8.12	27.23	32.81	38.96	46.00	7.04	Peak
938.567	26.51	8.94	26.93	32.06	40.58	46.00	5.42	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.233	22.77	1.27	26.52	30.95	28.47	40.00	11.53	Peak
154.483	16.32	2.92	26.00	41.37	34.62	43.50	8.88	Peak
219.958	16.47	3.60	25.77	43.23	37.52	46.00	8.48	Peak
649.183	24.52	7.04	27.40	32.08	36.23	46.00	9.77	Peak
929.675	26.45	8.89	26.95	32.38	40.76	46.00	5.24	Peak
980.600	26.81	9.17	26.81	31.97	41.14	54.00	12.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
77.692	12.82	2.01	26.38	44.39	32.84	40.00	7.16	Peak
160.950	15.97	2.99	25.97	39.05	32.05	43.50	11.45	Peak
431.742	22.09	5.81	26.73	34.50	35.68	46.00	10.32	Peak
717.892	24.75	7.42	27.38	32.02	36.82	46.00	9.18	Peak
861.775	25.78	8.44	27.13	32.69	39.78	46.00	6.22	Peak
981.408	26.82	9.17	26.81	31.92	41.11	54.00	12.89	Peak

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
34.042	22.48	1.28	26.51	30.83	28.08	40.00	11.92	Peak
117.300	17.74	2.50	26.19	34.18	28.22	43.50	15.28	Peak
156.908	16.17	2.95	25.99	41.75	34.88	43.50	8.62	Peak
218.342	16.38	3.58	25.78	42.18	36.38	46.00	9.62	Peak
826.208	25.34	8.16	27.21	31.94	38.23	46.00	7.77	Peak
975.750	26.78	9.14	26.83	30.56	39.66	54.00	14.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	31.34	29.69	40.00	10.31	Peak
75.267	12.63	1.97	26.38	41.14	29.36	40.00	10.64	Peak
163.375	15.88	3.01	25.96	39.12	32.06	43.50	11.44	Peak
575.625	24.06	6.68	27.35	31.67	35.05	46.00	10.95	Peak
902.192	26.25	8.73	27.03	31.50	39.45	46.00	6.55	Peak
987.875	26.87	9.21	26.79	31.65	40.93	54.00	13.07	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	31.05	28.05	40.00	11.95	Peak
117.300	17.74	2.50	26.19	34.35	28.40	43.50	15.10	Peak
157.717	16.12	2.96	25.98	41.99	35.08	43.50	8.42	Peak
222.383	16.62	3.62	25.77	41.82	36.30	46.00	9.70	Peak
610.383	24.37	6.82	27.41	31.24	35.02	46.00	10.98	Peak
982.217	26.83	9.18	26.81	31.60	40.80	54.00	13.20	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.425	23.06	1.25	26.52	32.89	30.68	40.00	9.32	Peak
78.500	12.89	2.02	26.37	41.88	30.42	40.00	9.58	Peak
162.567	15.91	3.01	25.96	38.98	31.93	43.50	11.57	Peak
395.367	21.45	5.46	26.48	31.89	32.33	46.00	13.67	Peak
698.492	24.68	7.29	27.40	31.72	36.30	46.00	9.70	Peak
976.558	26.79	9.15	26.82	31.50	40.61	54.00	13.39	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

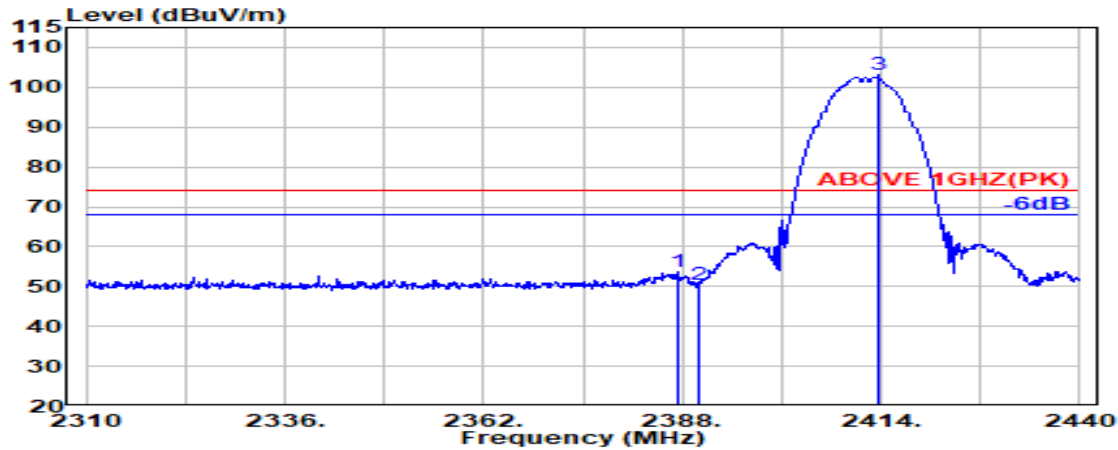

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.20	6.03	39.93	59.24	53.54	74.00	20.46	Peak
2390.000	28.20	6.03	39.93	56.14	50.44	74.00	23.56	Peak
@ 2413.600	28.25	6.07	39.93	108.61	103.00	---	---	Peak

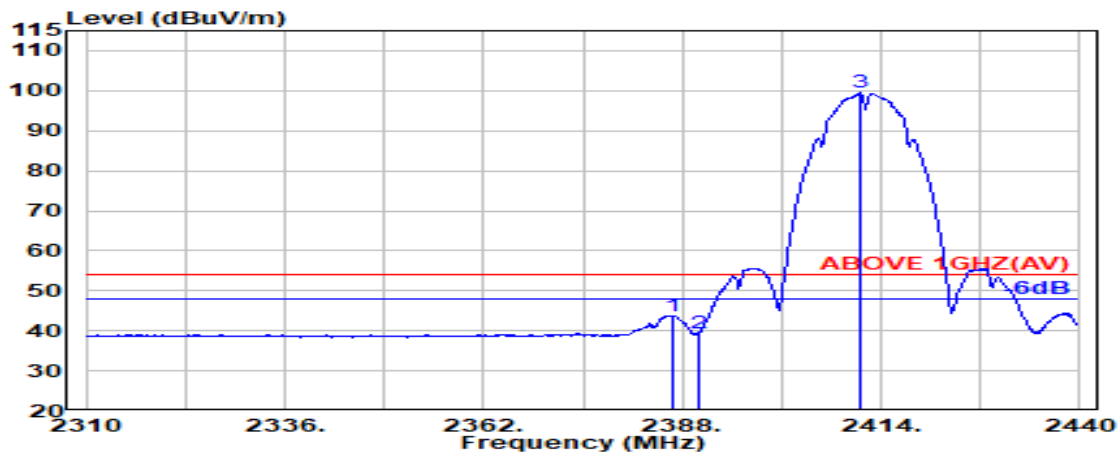


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.700	28.20	6.03	39.93	49.49	43.79	54.00	10.21	Average
2390.000	28.20	6.03	39.93	44.95	39.26	54.00	14.74	Average
@ 2411.300	28.25	6.07	39.93	105.08	99.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

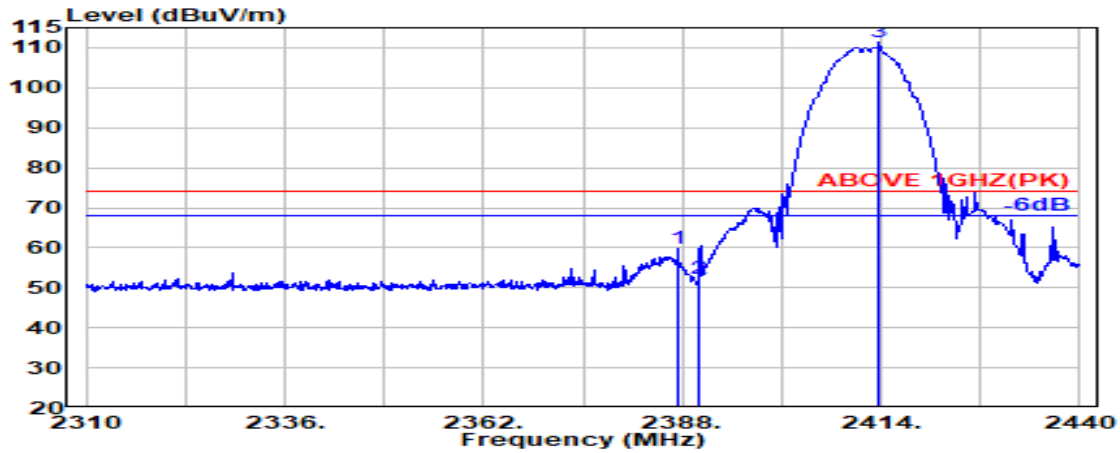

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.20	6.03	39.93	65.55	59.86	74.00	14.14	Peak
2390.000	28.20	6.03	39.93	57.93	52.24	74.00	21.76	Peak
@ 2413.800	28.26	6.07	39.93	117.11	111.51	---	---	Peak

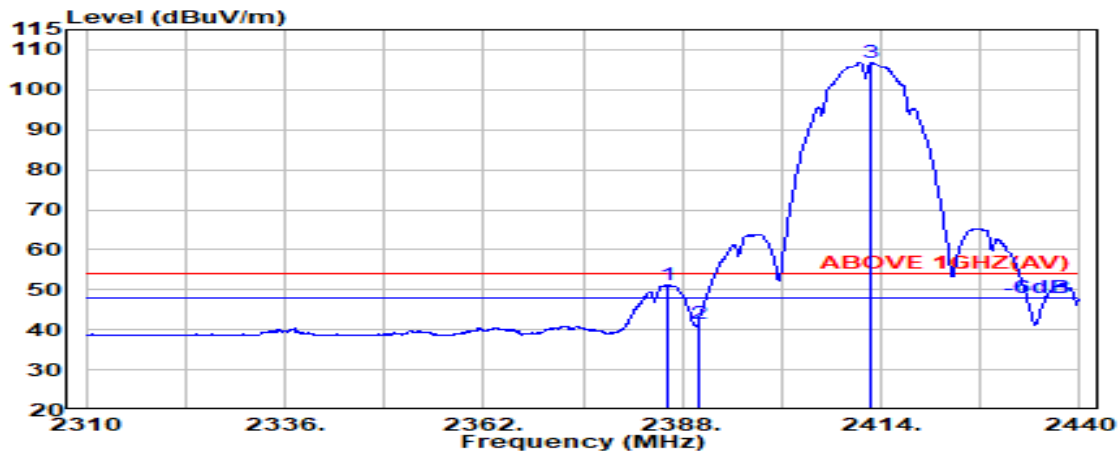


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.100	28.20	6.03	39.93	56.77	51.07	54.00	2.93	Average
2390.000	28.20	6.03	39.93	47.13	41.44	54.00	12.56	Average
@ 2412.800	28.25	6.07	39.93	112.48	106.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

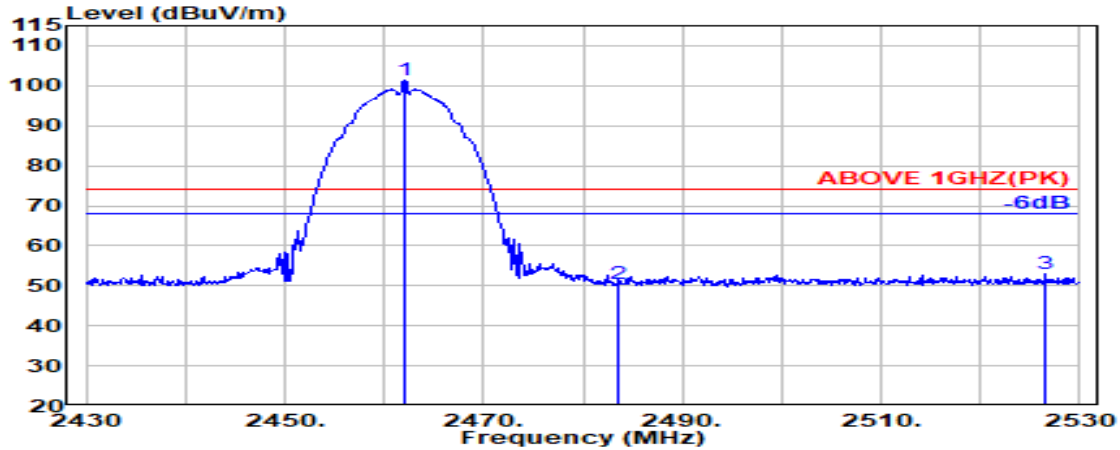

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.42	6.14	39.92	106.59	101.23	---	---	Peak
2483.500	28.47	6.17	39.92	55.89	50.61	74.00	23.39	Peak
2526.500	28.55	6.22	39.92	58.27	53.12	74.00	20.88	Peak

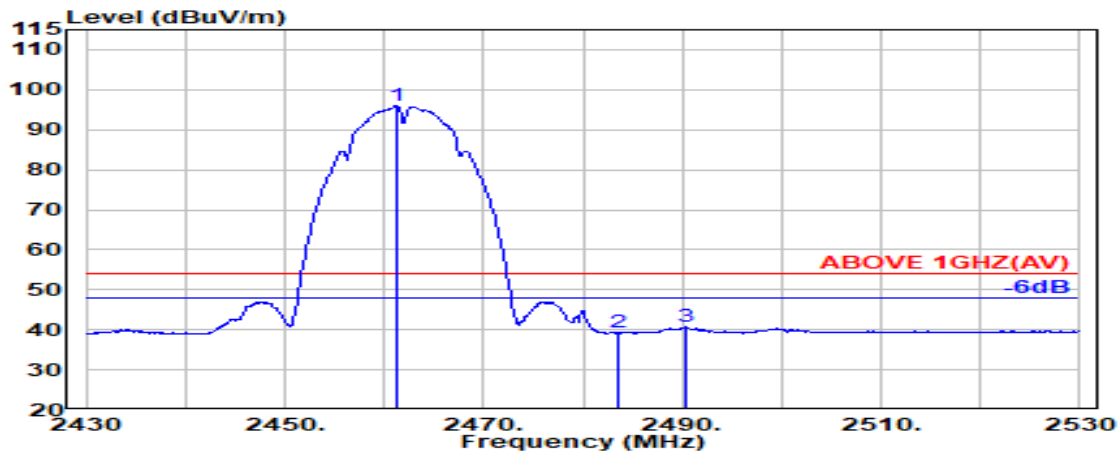


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	39.92	101.36	95.99	---	---	Average
2483.500	28.47	6.17	39.92	44.62	39.33	54.00	14.67	Average
2490.400	28.48	6.18	39.92	45.91	40.64	54.00	13.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

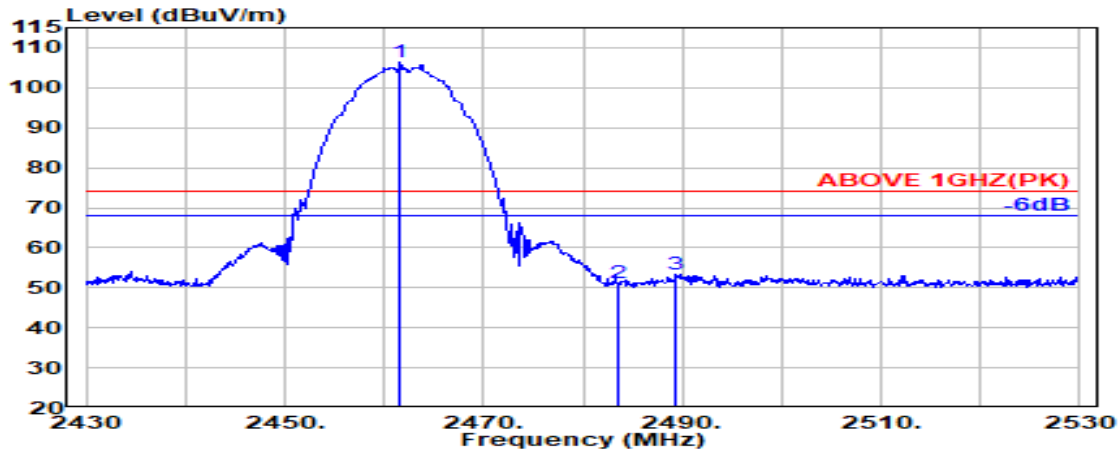

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.600	28.42	6.14	39.92	111.73	106.37	---	---	Peak
2483.500	28.47	6.17	39.92	56.32	51.03	74.00	22.97	Peak
2489.400	28.48	6.18	39.92	58.76	53.49	74.00	20.51	Peak

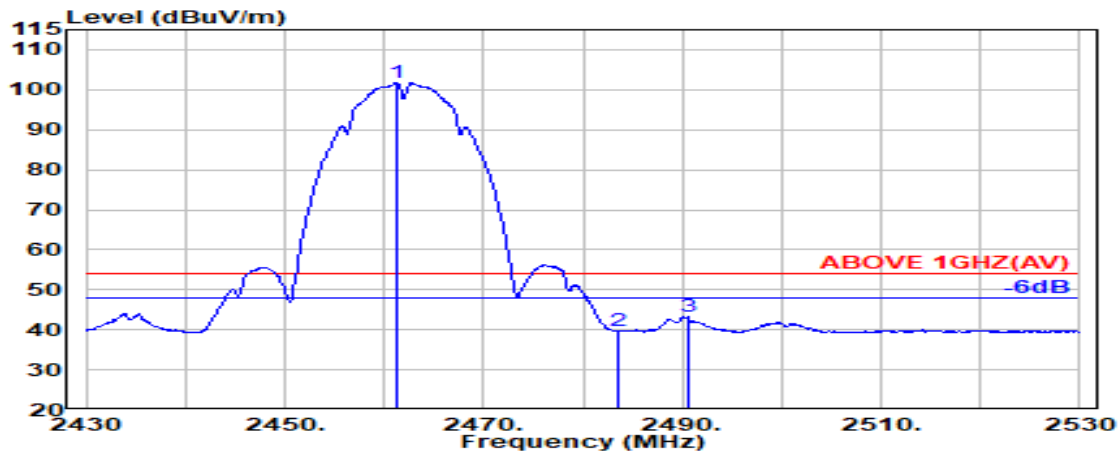


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	39.92	107.12	101.75	---	---	Average
2483.500	28.47	6.17	39.92	45.04	39.75	54.00	14.25	Average
2490.500	28.48	6.18	39.92	48.44	43.17	54.00	10.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

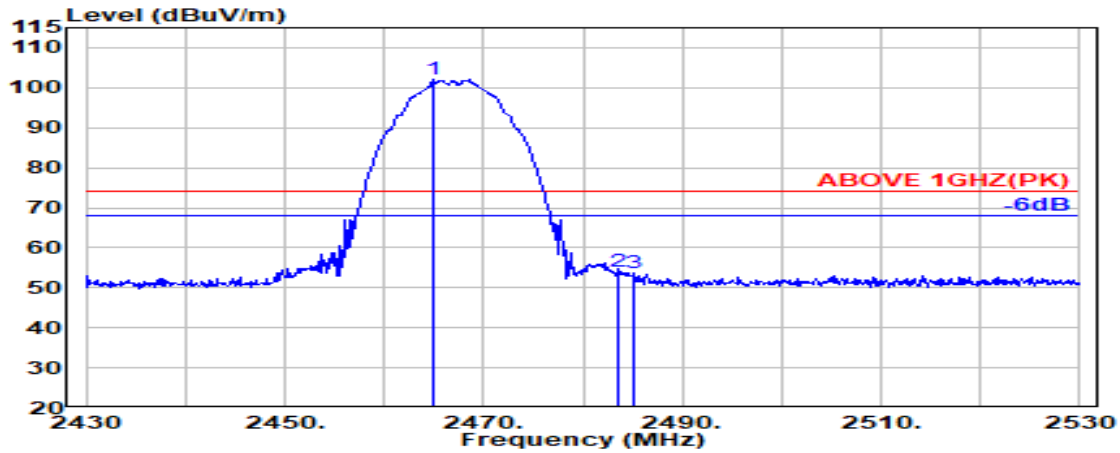

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	39.92	107.47	102.12	---	---	Peak
2483.500	28.47	6.17	39.92	59.23	53.94	74.00	20.06	Peak
2485.100	28.47	6.17	39.92	59.05	53.77	74.00	20.23	Peak

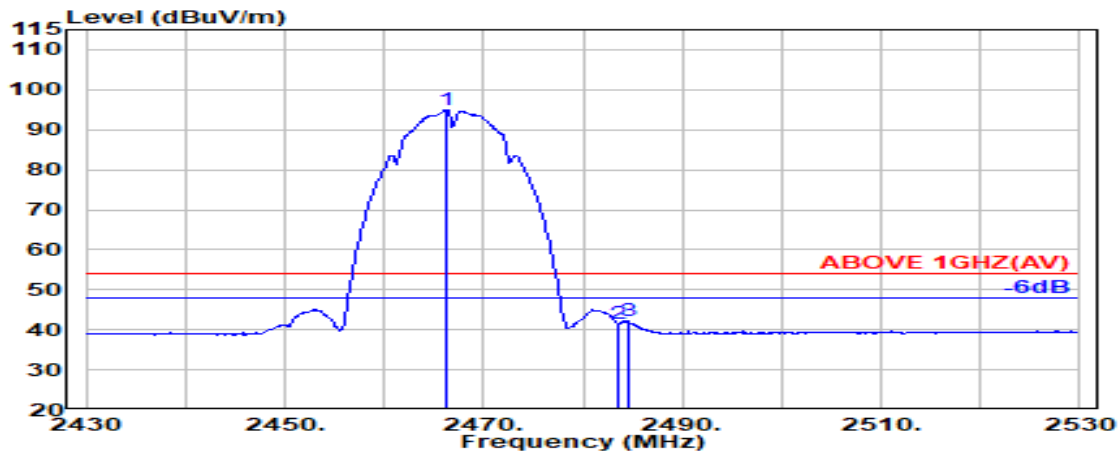


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	39.92	100.23	94.88	---	---	Average
2483.500	28.47	6.17	39.92	46.76	41.47	54.00	12.53	Average
2484.600	28.47	6.17	39.92	47.41	42.13	54.00	11.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

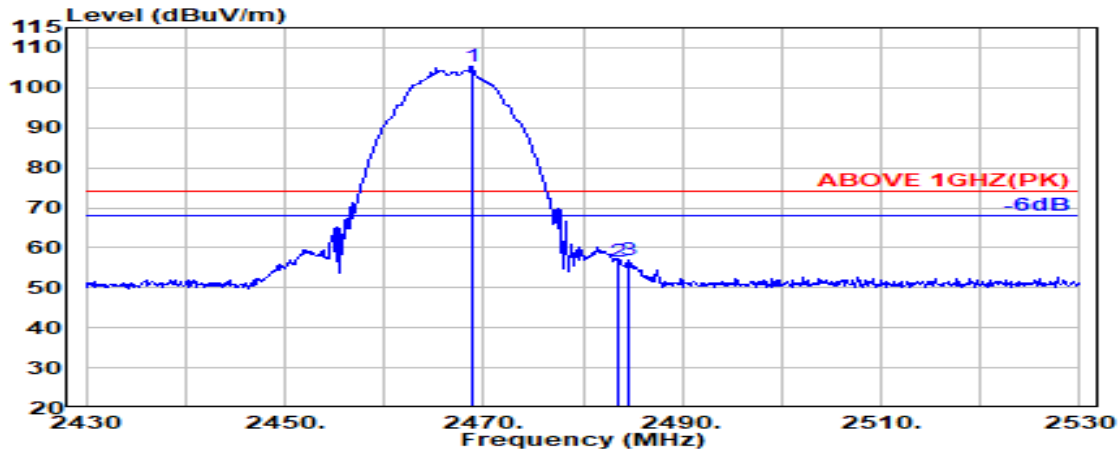

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.44	6.15	39.92	110.76	105.42	---	---	Peak
2483.500	28.47	6.17	39.92	61.89	56.60	74.00	17.40	Peak
2484.500	28.47	6.17	39.92	62.26	56.98	74.00	17.02	Peak

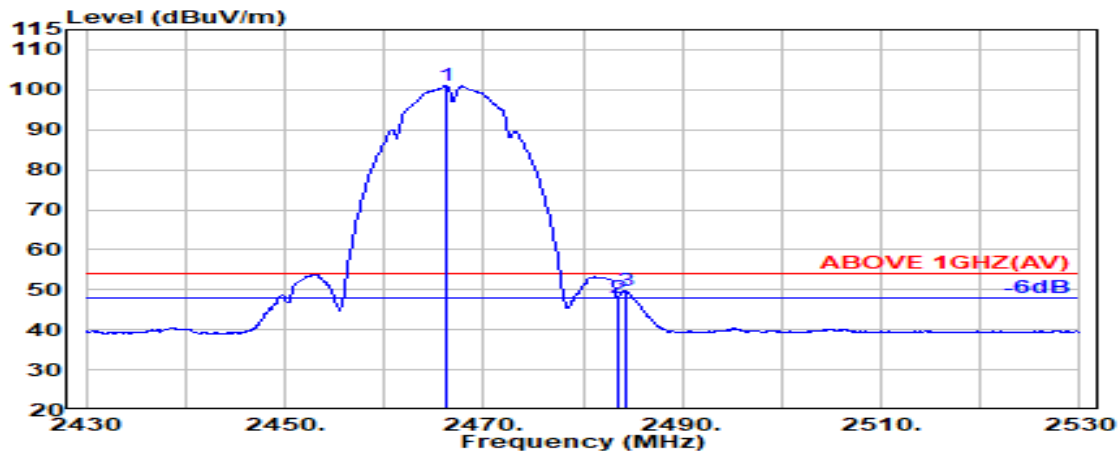


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	6.14	39.92	106.39	101.05	---	---	Average
2483.500	28.47	6.17	39.92	53.33	48.04	54.00	5.96	Average
2484.400	28.47	6.17	39.92	55.12	49.84	54.00	4.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

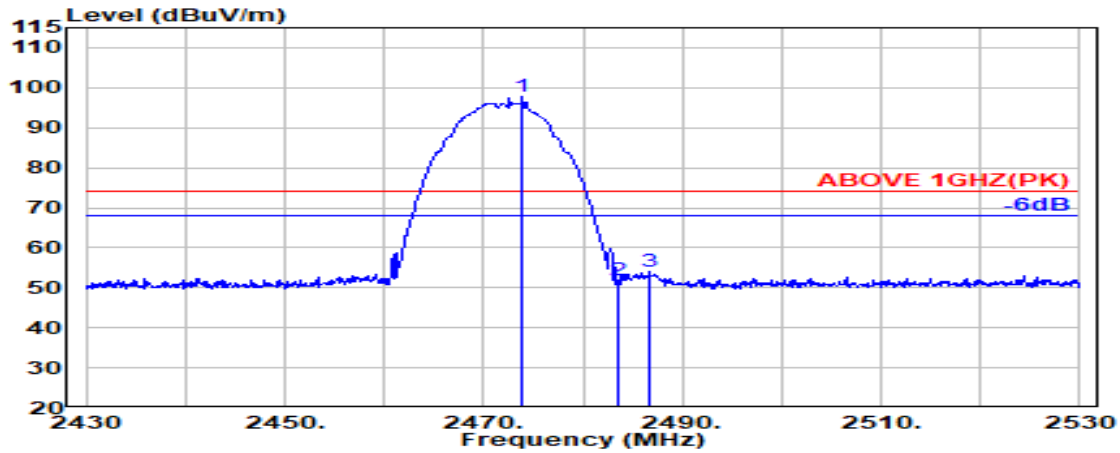

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.900	28.45	6.15	39.92	102.98	97.66	---	---	Peak
2483.500	28.47	6.17	39.92	57.27	51.98	74.00	22.02	Peak
2486.700	28.47	6.17	39.92	59.22	53.94	74.00	20.06	Peak

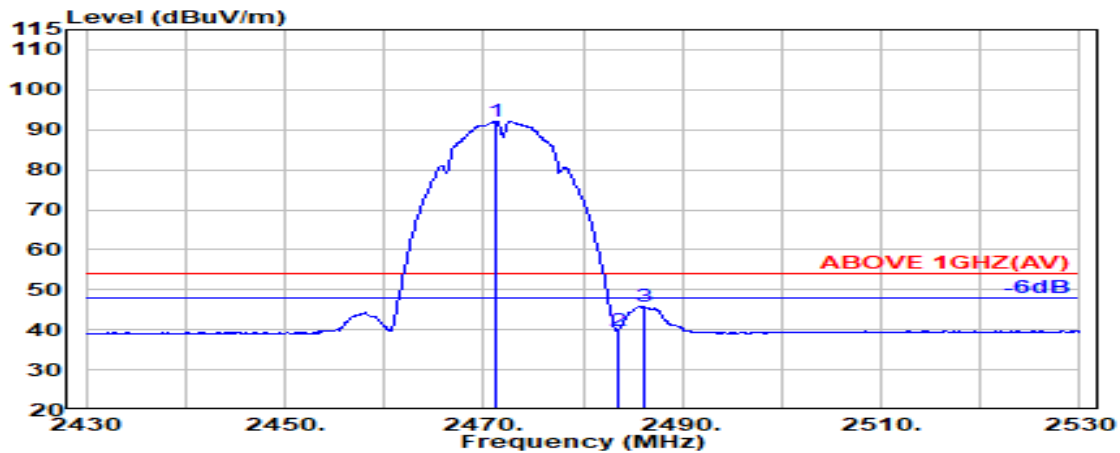


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	39.92	97.56	92.23	---	---	Average
2483.500	28.47	6.17	39.92	45.11	39.82	54.00	14.18	Average
2486.200	28.47	6.17	39.92	51.14	45.86	54.00	8.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

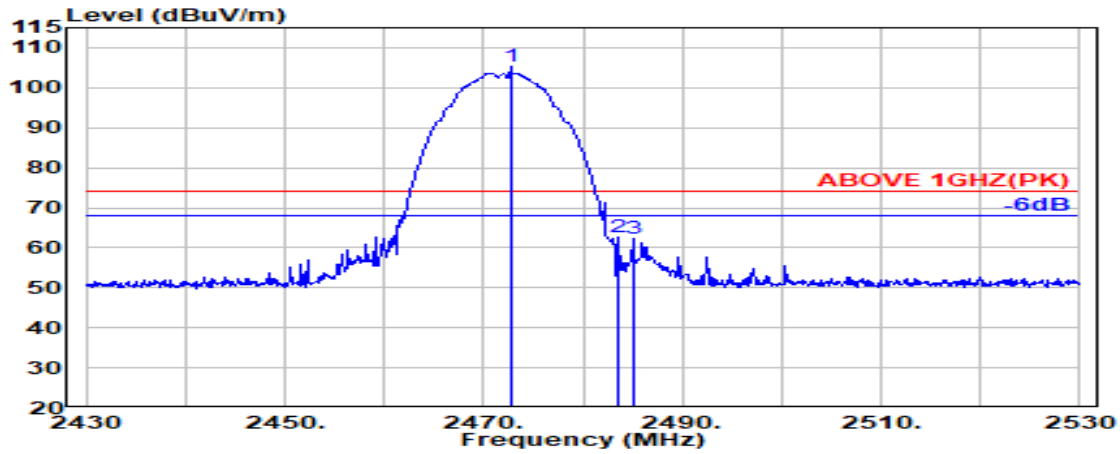

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.700	28.45	6.15	39.92	110.48	105.16	---	---	Peak
2483.500	28.47	6.17	39.92	68.02	62.73	74.00	11.27	Peak
2485.100	28.47	6.17	39.92	67.50	62.22	74.00	11.78	Peak

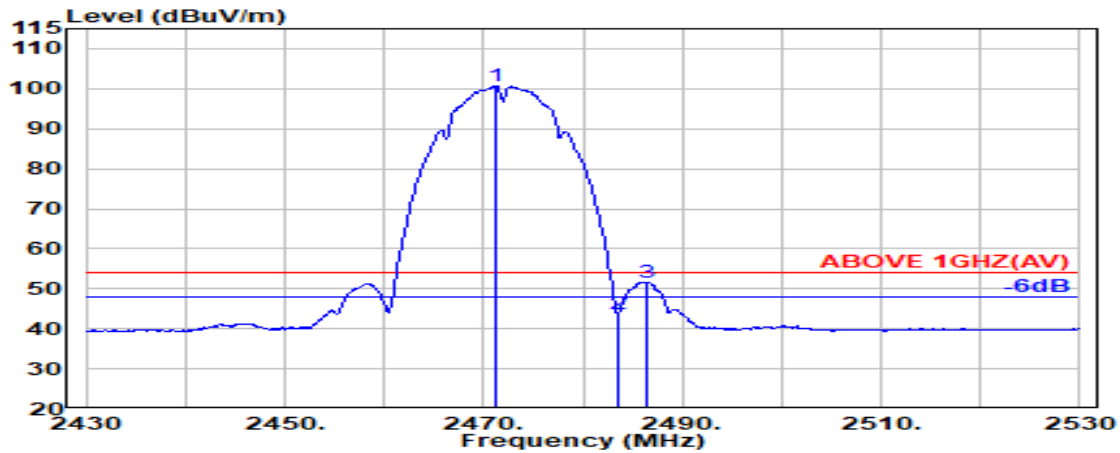


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	39.92	106.12	100.79	---	---	Average
2483.500	28.47	6.17	39.92	49.10	43.81	54.00	10.19	Average
2486.500	28.47	6.17	39.92	56.95	51.67	54.00	2.33	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

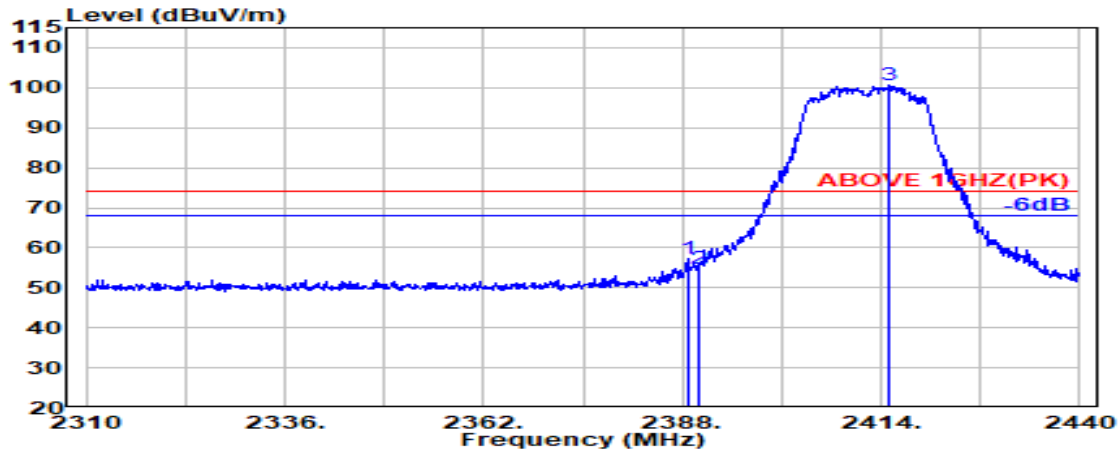

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.20	6.03	39.93	62.99	57.29	74.00	16.71	Peak
2390.000	28.20	6.03	39.93	60.42	54.73	74.00	19.27	Peak
@ 2415.100	28.26	6.07	39.93	106.19	100.60	---	---	Peak

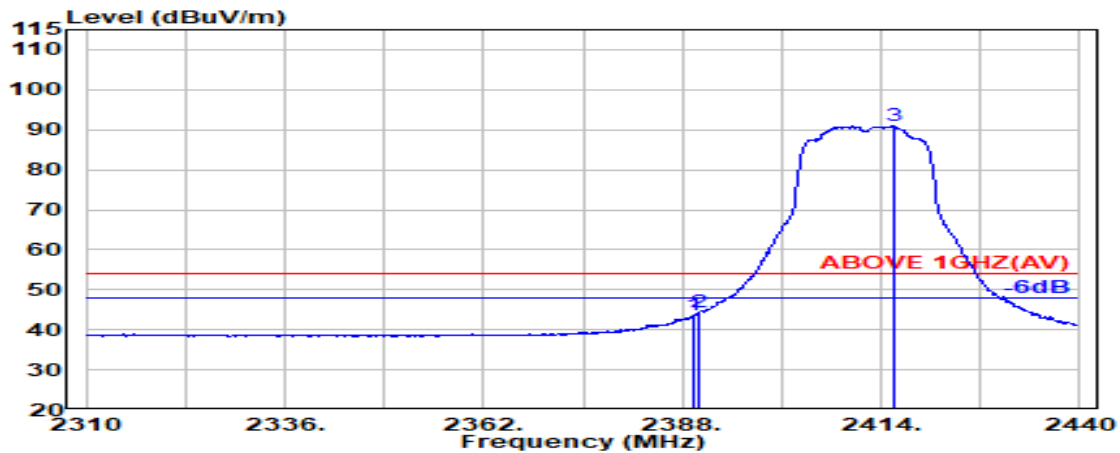


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	49.25	43.56	54.00	10.44	Average
2390.000	28.20	6.03	39.93	50.00	44.31	54.00	9.69	Average
@ 2415.600	28.26	6.07	39.93	96.49	90.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

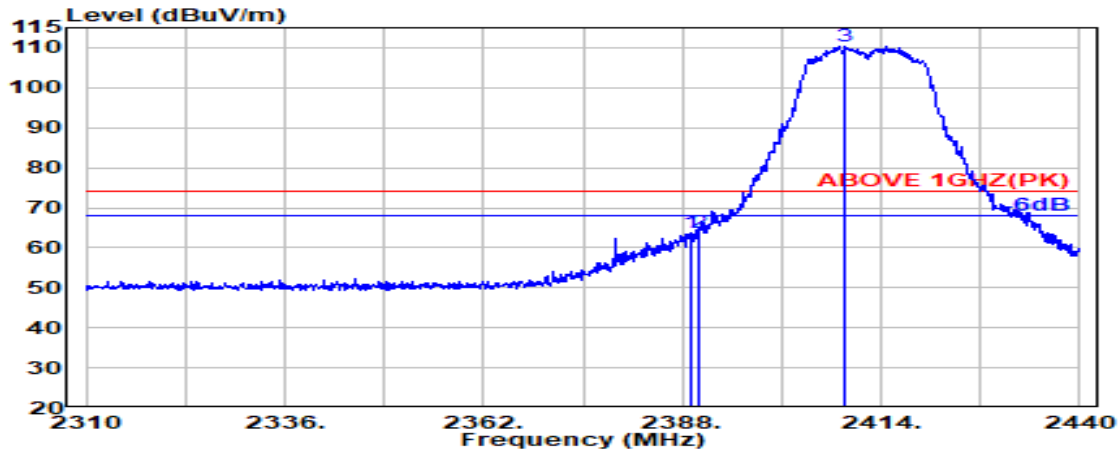

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	6.03	39.93	69.59	63.90	74.00	10.10	Peak
2390.000	28.20	6.03	39.93	69.38	63.68	74.00	10.32	Peak
@ 2409.100	28.24	6.06	39.93	116.11	110.48	---	---	Peak

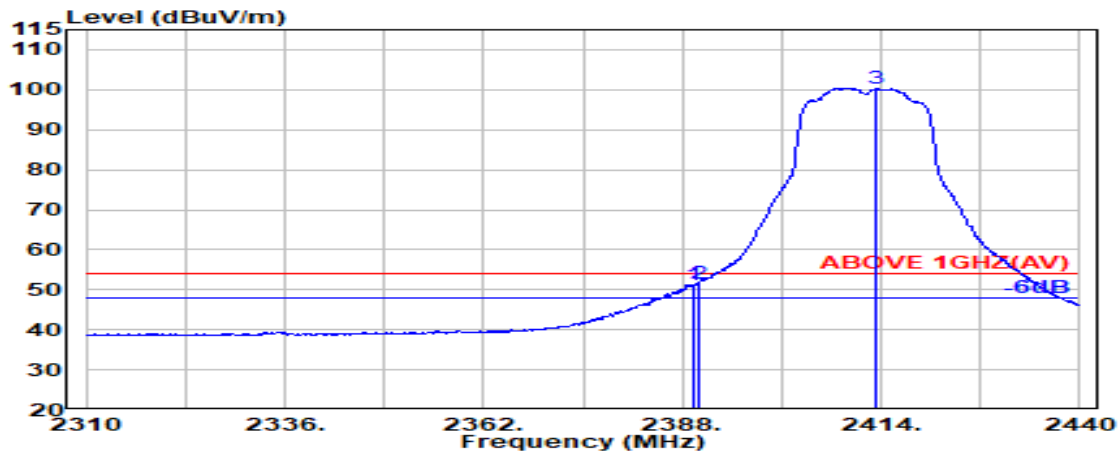


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	57.05	51.35	54.00	2.65	Average
2390.000	28.20	6.03	39.93	57.22	51.53	54.00	2.47	Average
@ 2413.400	28.25	6.07	39.93	106.02	100.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

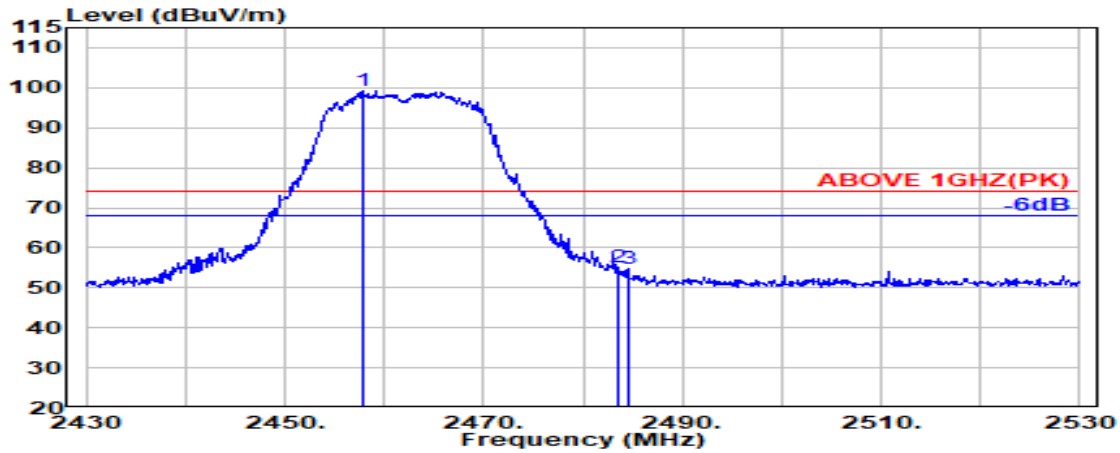

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.800	28.42	6.13	39.92	104.75	99.37	---	---	Peak
2483.500	28.47	6.17	39.92	60.25	54.96	74.00	7.15	Peak
2484.500	28.47	6.17	39.92	60.13	54.84	74.00	10.05	Peak

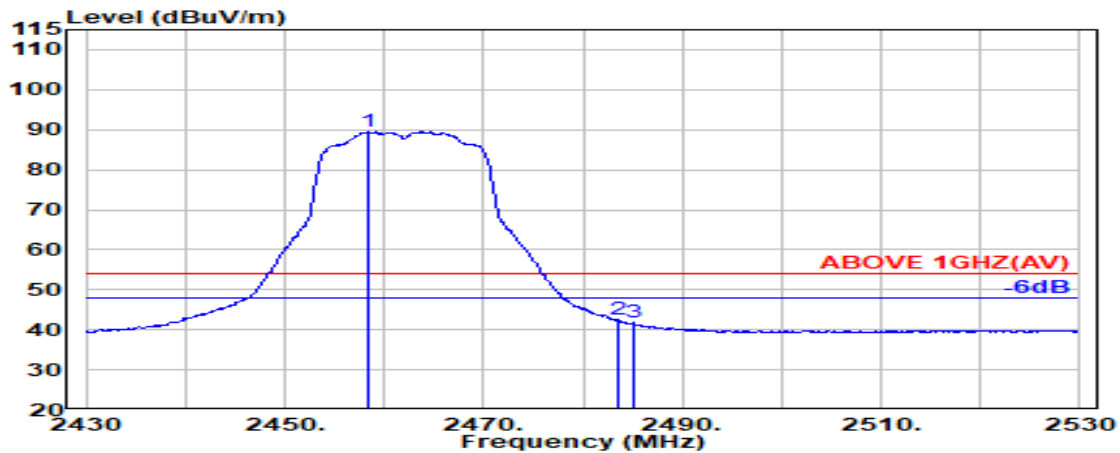


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	28.42	6.13	39.92	94.81	89.43	---	---	Average
2483.500	28.47	6.17	39.92	47.75	42.46	54.00	1.63	Average
2485.000	28.47	6.17	39.92	47.00	41.72	54.00	2.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

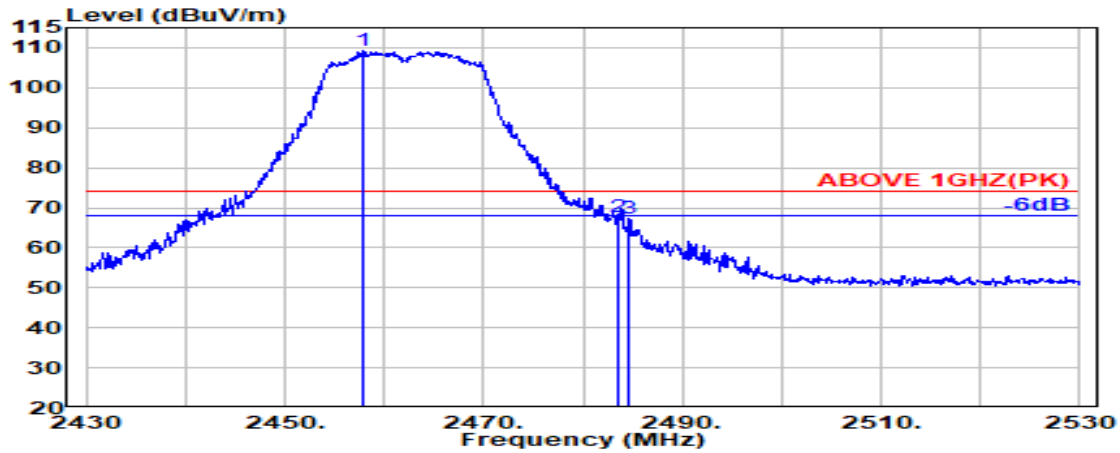

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.900	28.42	6.13	39.92	114.60	109.23	---	---	Peak
2483.500	28.47	6.17	39.92	72.87	67.59	74.00	6.41	Peak
2484.600	28.47	6.17	39.92	72.71	67.43	74.00	6.57	Peak

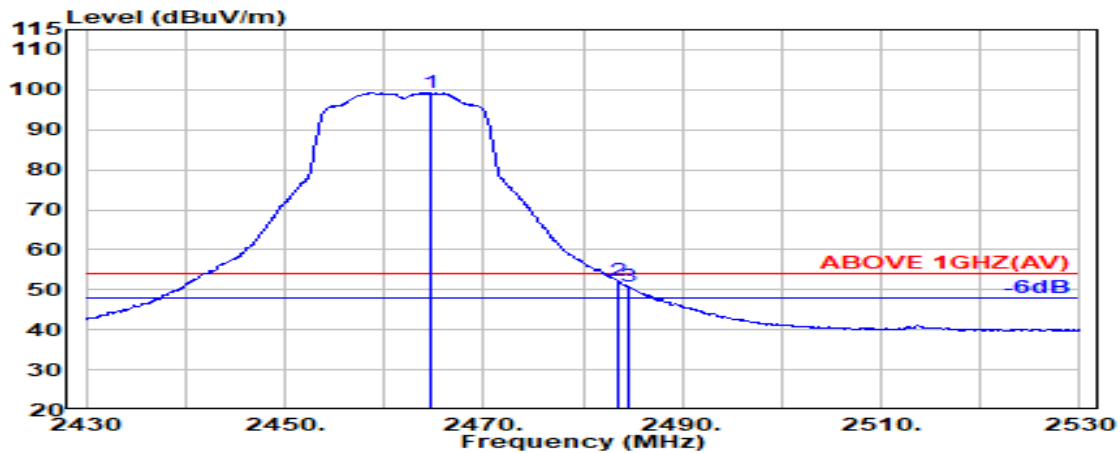


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	39.92	104.65	99.30	---	---	Average
2483.500	28.47	6.17	39.92	57.54	52.25	54.00	1.75	Average
2484.500	28.47	6.17	39.92	56.13	50.85	54.00	3.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

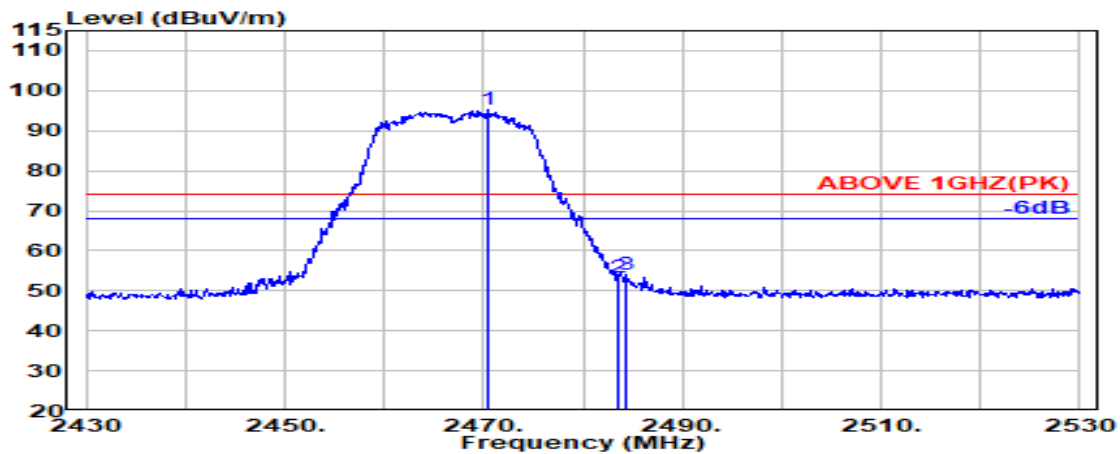

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	28.44	6.15	39.92	100.65	95.32	---	---	Peak
2483.500	28.47	6.17	39.92	58.68	53.39	74.00	20.61	Peak
2484.400	28.47	6.17	39.92	59.23	53.95	74.00	20.05	Peak

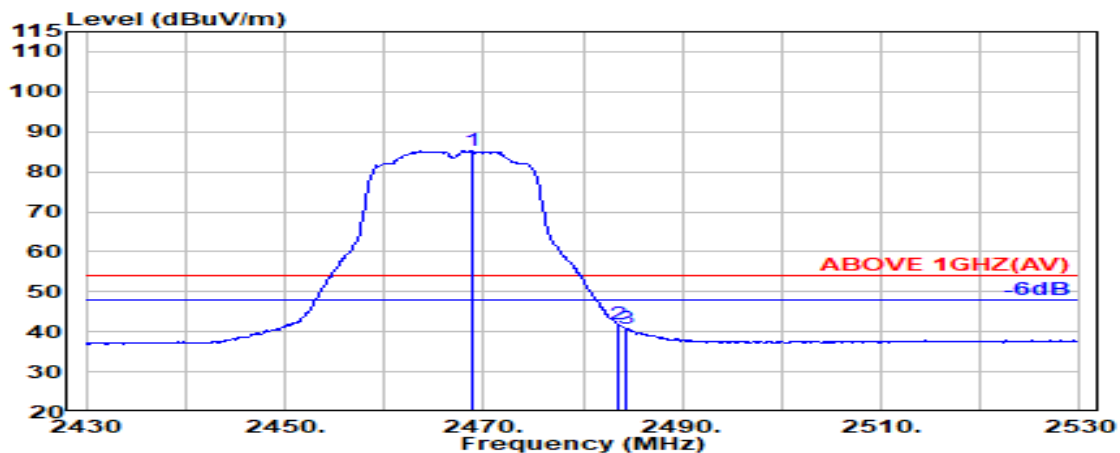


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.44	6.15	39.92	90.53	85.20	---	---	Average
2483.500	28.47	6.17	39.92	47.17	41.89	54.00	12.11	Average
2484.400	28.47	6.17	39.92	46.23	40.95	54.00	13.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

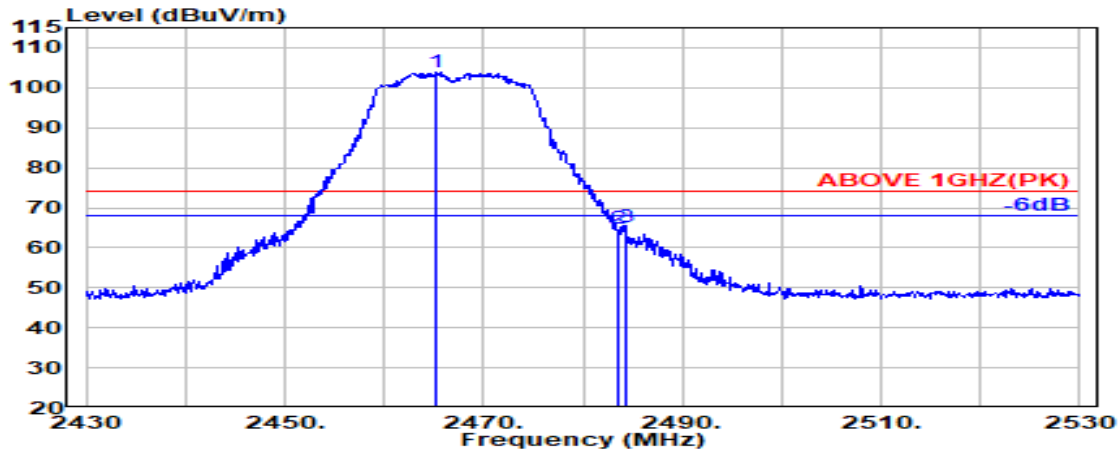

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	39.92	109.27	103.92	---	---	Peak
2483.500	28.47	6.17	39.92	70.07	64.79	74.00	9.21	Peak
2484.400	28.47	6.17	39.92	70.60	65.32	74.00	8.68	Peak

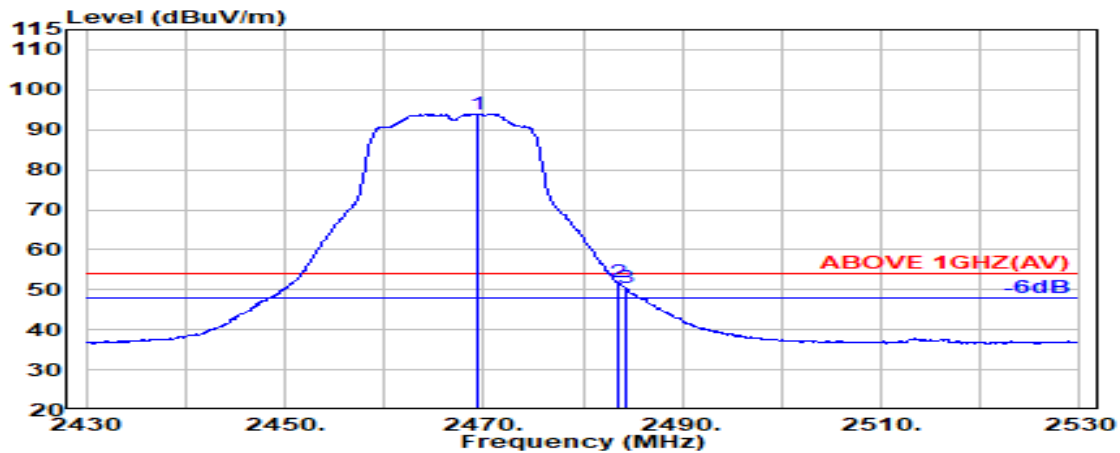


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	39.92	99.22	93.88	---	---	Average
2483.500	28.47	6.17	39.92	57.14	51.86	54.00	2.14	Average
2484.400	28.47	6.17	39.92	55.76	50.48	54.00	3.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

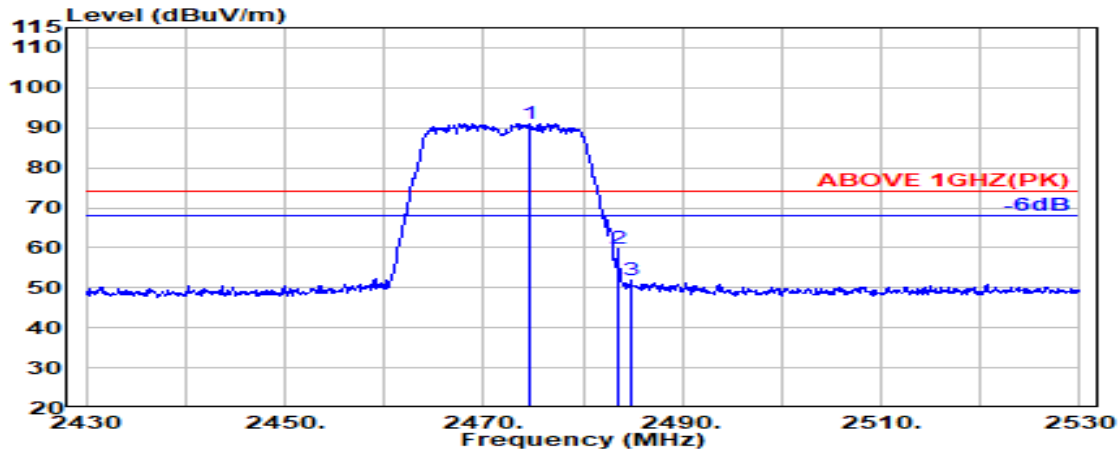

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.700	28.45	6.15	39.92	96.45	91.14	---	---	Peak
2483.500	28.47	6.17	39.92	64.95	59.67	74.00	14.33	Peak
2484.800	28.47	6.17	39.92	57.05	51.76	74.00	22.24	Peak

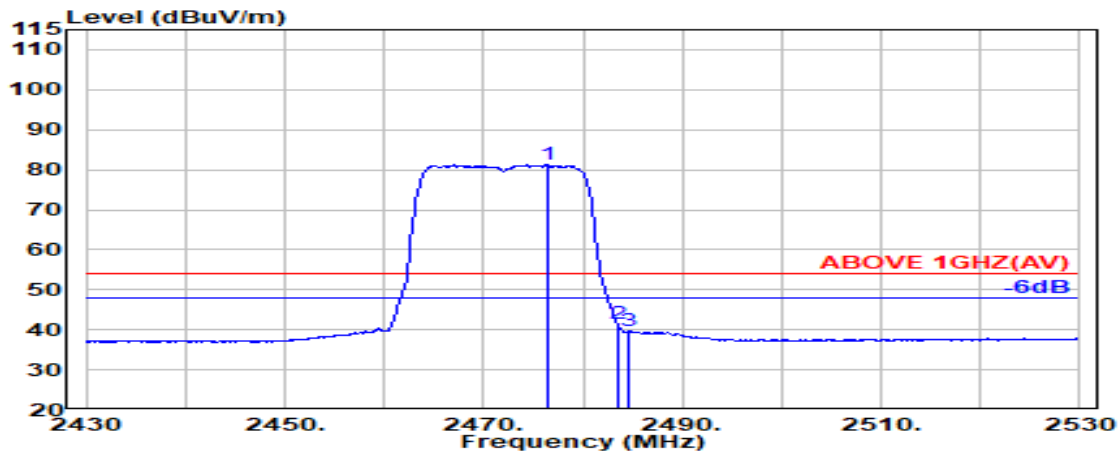


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.400	28.45	6.16	39.92	86.55	81.24	---	---	Average
2483.500	28.47	6.17	39.92	46.93	41.65	54.00	12.35	Average
2484.700	28.47	6.17	39.92	44.94	39.65	54.00	14.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

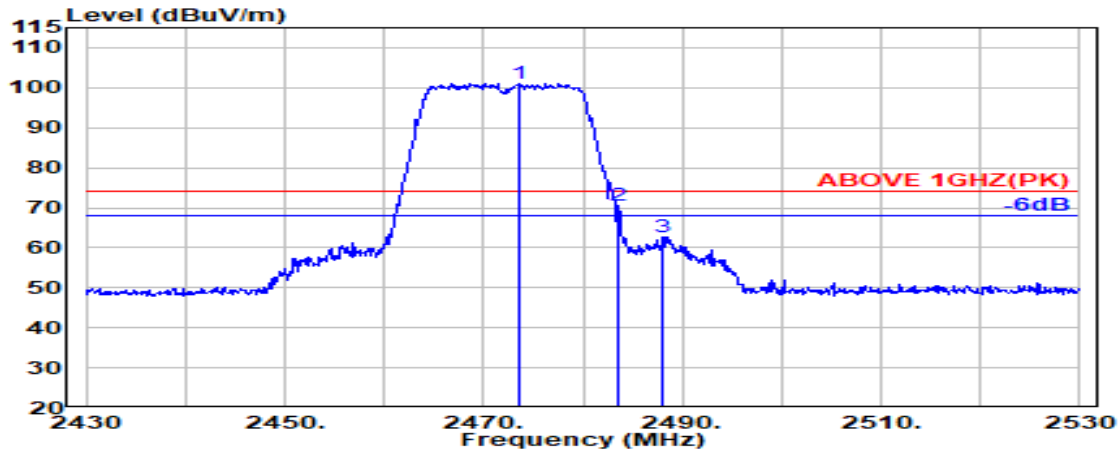

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.700	28.45	6.15	39.92	106.33	101.00	---	---	Peak
2483.500	28.47	6.17	39.92	75.68	70.39	74.00	3.61	Peak
2488.100	28.48	6.17	39.92	67.96	62.68	74.00	11.32	Peak

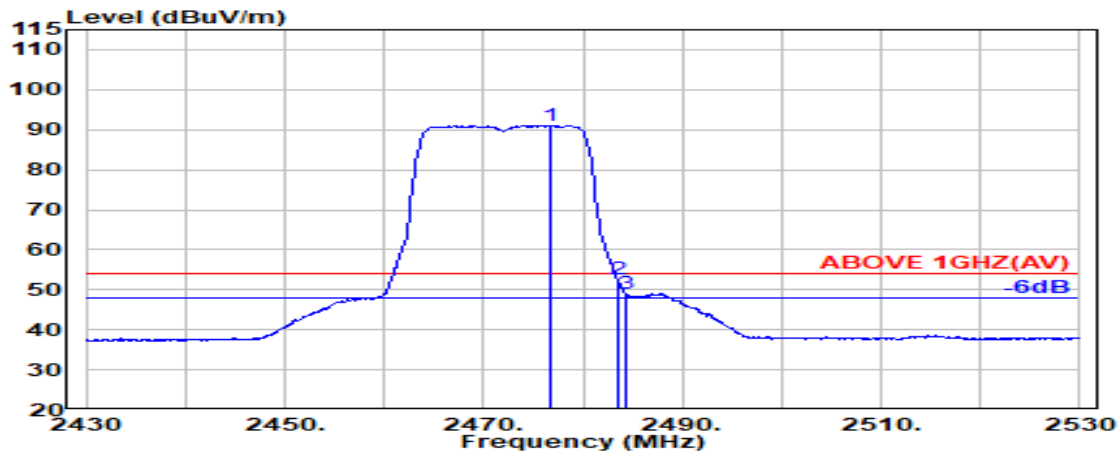


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.700	28.45	6.16	39.92	96.41	91.10	---	---	Average
2483.500	28.47	6.17	39.92	57.77	52.49	54.00	1.51	Average
2484.400	28.47	6.17	39.92	54.22	48.94	54.00	5.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

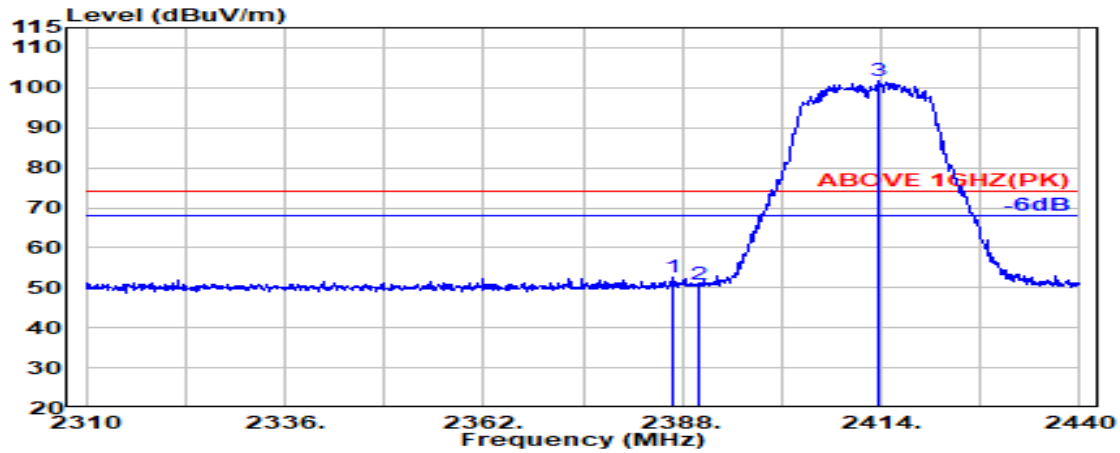

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.700	28.20	6.03	39.93	58.34	52.64	74.00	21.36	Peak
2390.000	28.20	6.03	39.93	56.60	50.91	74.00	23.09	Peak
@ 2413.500	28.25	6.07	39.93	107.18	101.58	---	---	Peak

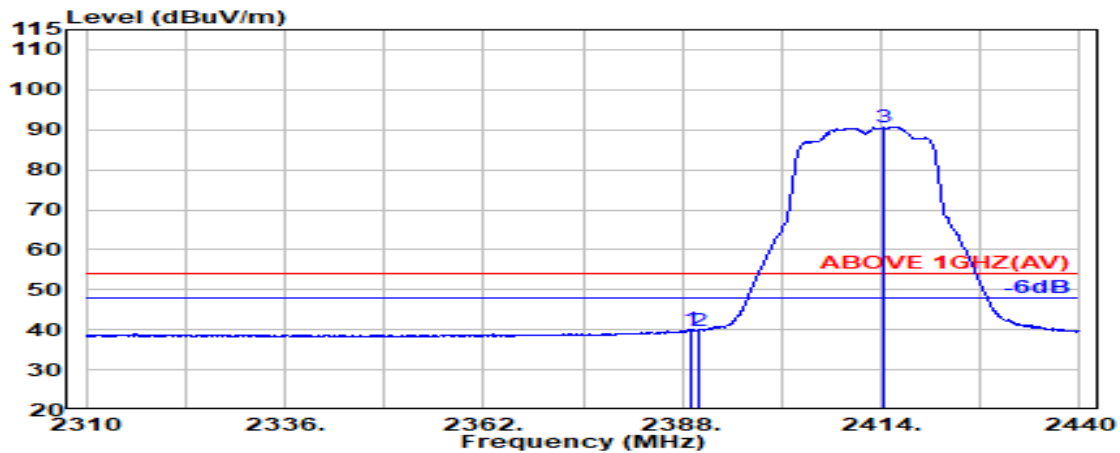


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	6.03	39.93	45.67	39.98	54.00	14.02	Average
2390.000	28.20	6.03	39.93	45.50	39.81	54.00	14.19	Average
@ 2414.400	28.26	6.07	39.93	96.38	90.78	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

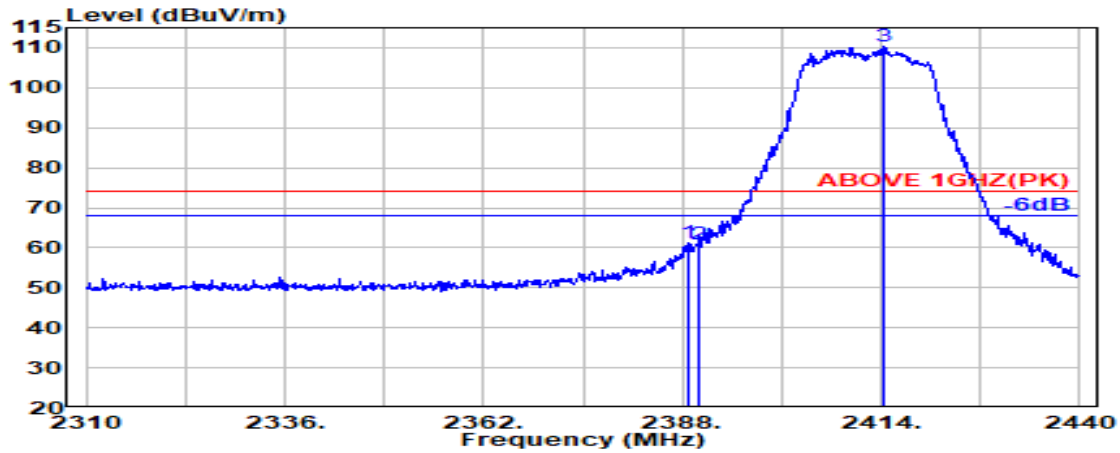

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	6.03	39.93	66.97	61.27	74.00	12.73	Peak
2390.000	28.20	6.03	39.93	66.47	60.77	74.00	13.23	Peak
@ 2414.500	28.26	6.07	39.93	115.95	110.35	---	---	Peak

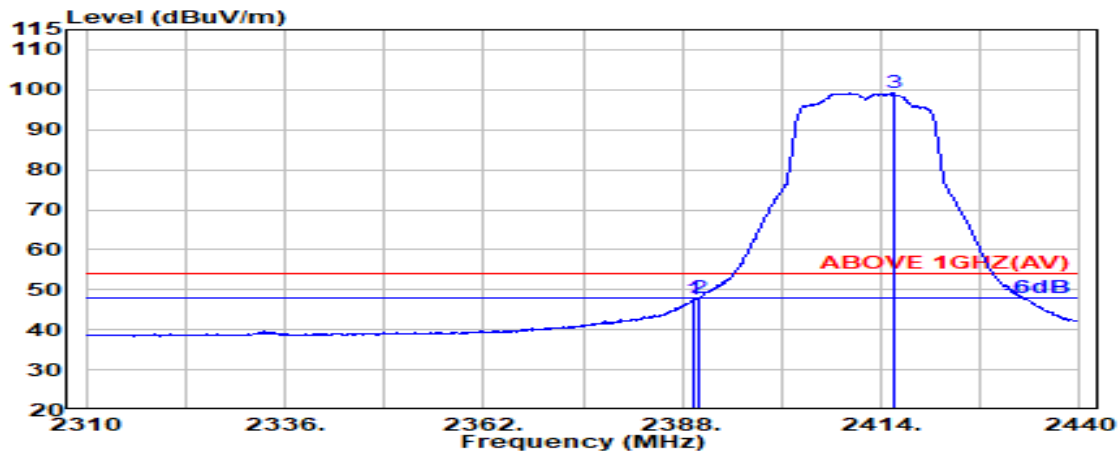


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	53.20	47.50	54.00	6.50	Average
2390.000	28.20	6.03	39.93	53.64	47.95	54.00	6.05	Average
@ 2415.600	28.26	6.07	39.93	104.74	99.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

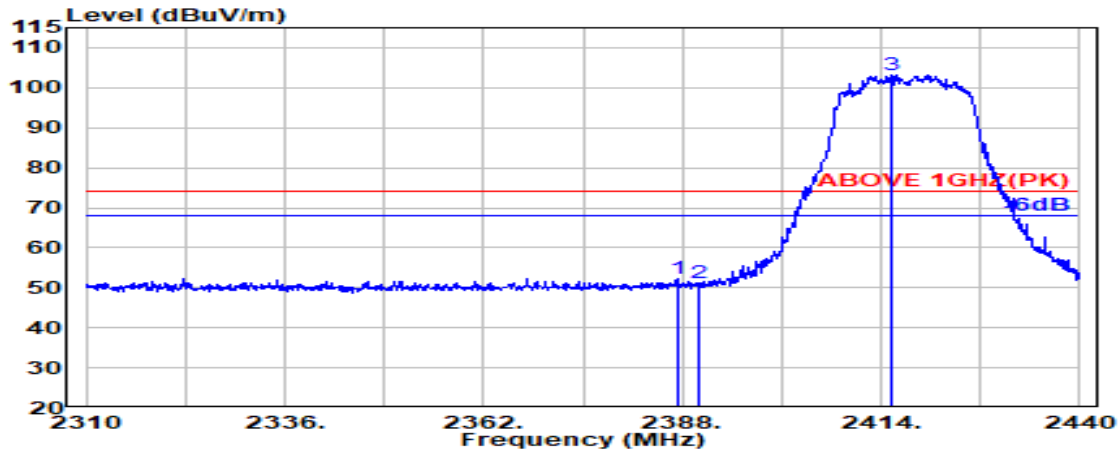

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.20	6.03	39.93	57.91	52.21	74.00	21.79	Peak
2390.000	28.20	6.03	39.93	56.77	51.07	74.00	22.93	Peak
@ 2415.400	28.26	6.07	39.93	108.80	103.21	---	---	Peak

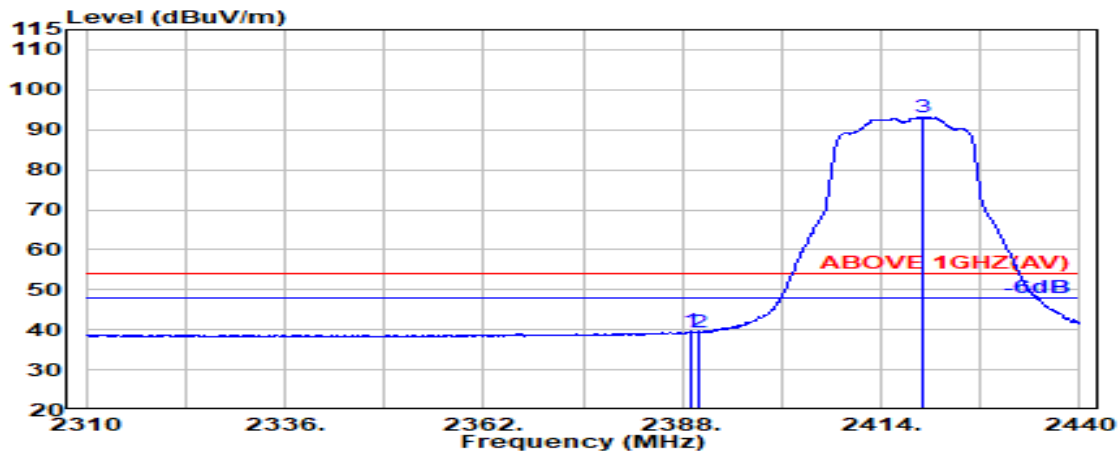


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	6.03	39.93	45.29	39.60	54.00	14.40	Average
2390.000	28.20	6.03	39.93	45.21	39.51	54.00	14.49	Average
@ 2419.400	28.28	6.08	39.93	98.68	93.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

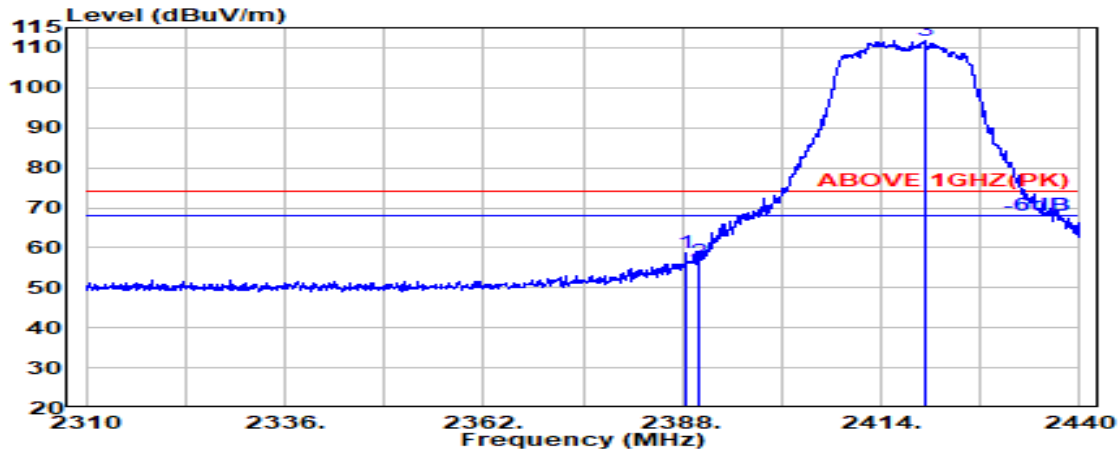

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.20	6.03	39.93	64.54	58.84	74.00	15.16	Peak
2390.000	28.20	6.03	39.93	62.10	56.41	74.00	17.59	Peak
@ 2419.700	28.28	6.08	39.93	117.28	111.71	---	---	Peak

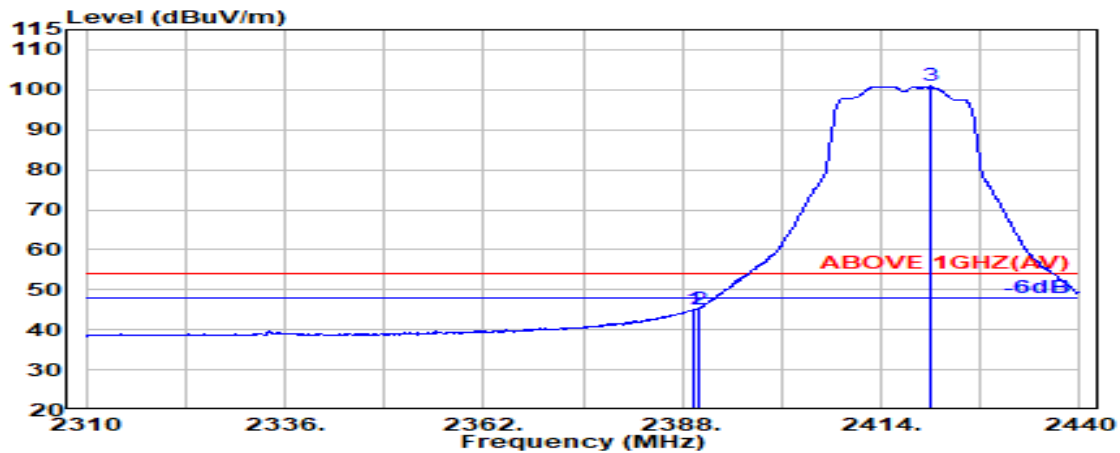


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	50.72	45.02	54.00	8.98	Average
2390.000	28.20	6.03	39.93	50.92	45.23	54.00	8.77	Average
@ 2420.600	28.28	6.08	39.93	106.45	100.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

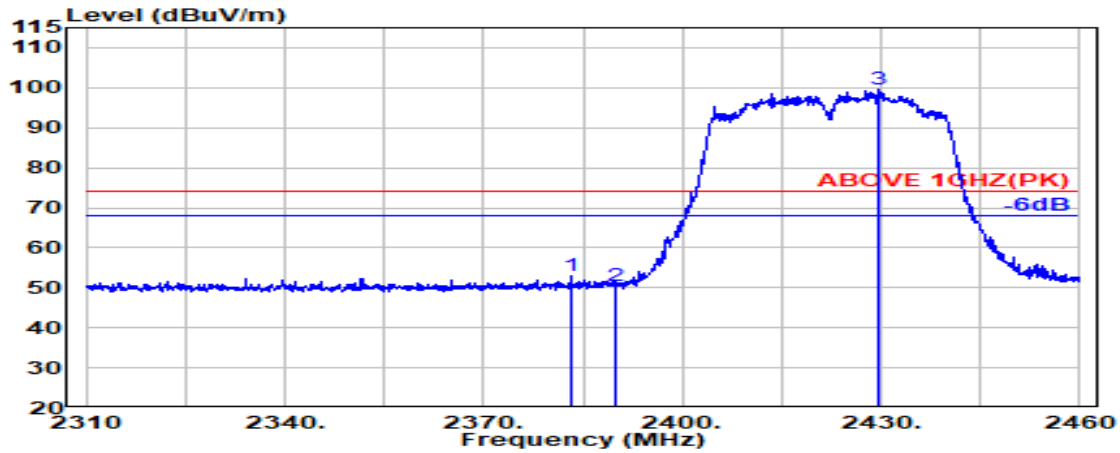

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.200	28.20	6.02	39.93	58.67	52.97	74.00	21.03	Peak
2390.000	28.20	6.03	39.93	56.05	50.35	74.00	23.65	Peak
@ 2429.700	28.32	6.09	39.93	105.23	99.71	---	---	Peak

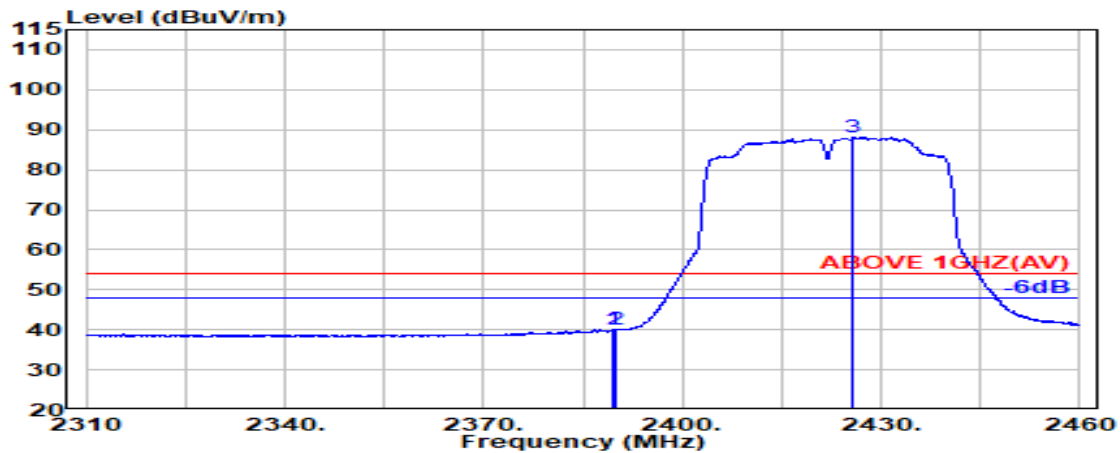


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	45.76	40.06	54.00	13.94	Average
2390.000	28.20	6.03	39.93	45.60	39.90	54.00	14.10	Average
@ 2425.800	28.30	6.09	39.93	93.68	88.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

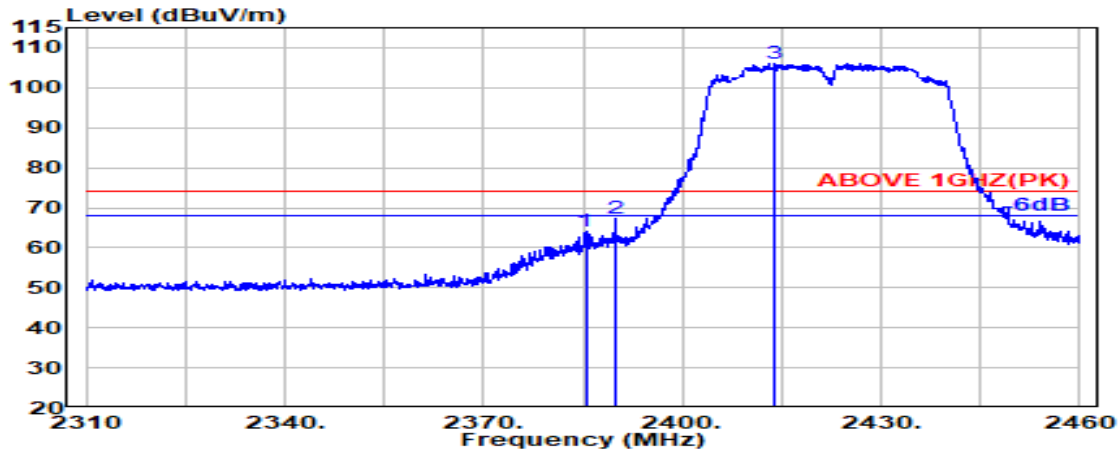

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.20	6.03	39.93	69.84	64.14	74.00	9.86	Peak
2390.000	28.20	6.03	39.93	72.92	67.22	74.00	6.78	Peak
@ 2413.800	28.26	6.07	39.93	111.71	106.11	---	---	Peak

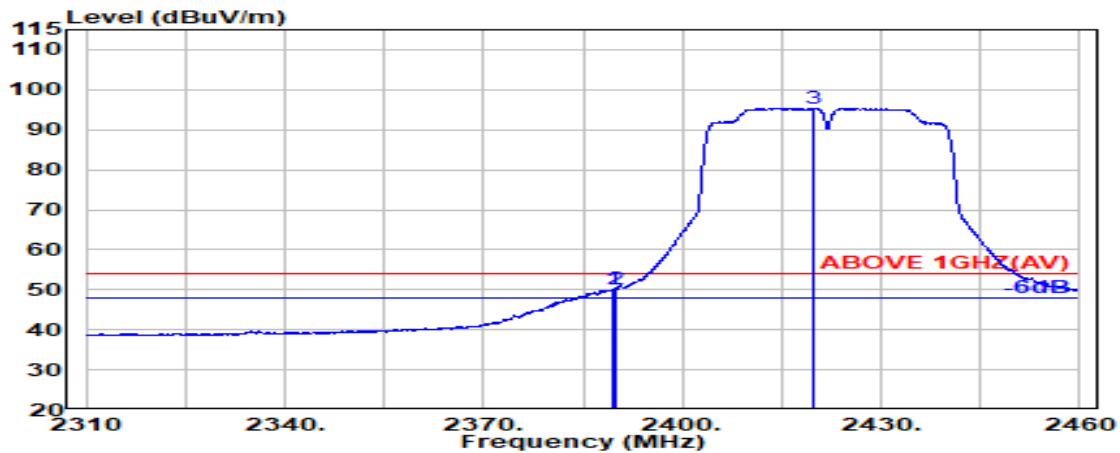

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	55.80	50.10	54.00	3.90	Average
2390.000	28.20	6.03	39.93	55.92	50.22	54.00	3.78	Average
@ 2419.700	28.28	6.08	39.93	101.01	95.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.200	28.42	6.13	39.92	108.02	102.64	---	---	Peak
2483.500	28.47	6.17	39.92	57.02	51.73	74.00	22.27	Peak
2507.200	28.51	6.20	39.92	58.29	53.09	74.00	20.91	Peak

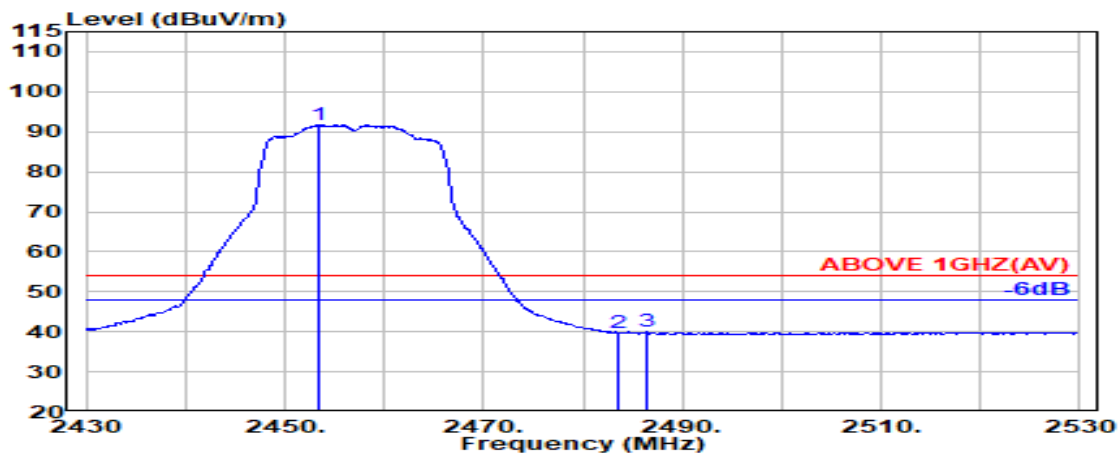


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.400	28.41	6.13	39.92	97.18	91.79	---	---	Average
2483.500	28.47	6.17	39.92	45.11	39.83	54.00	14.17	Average
2486.500	28.47	6.17	39.92	45.20	39.93	54.00	14.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

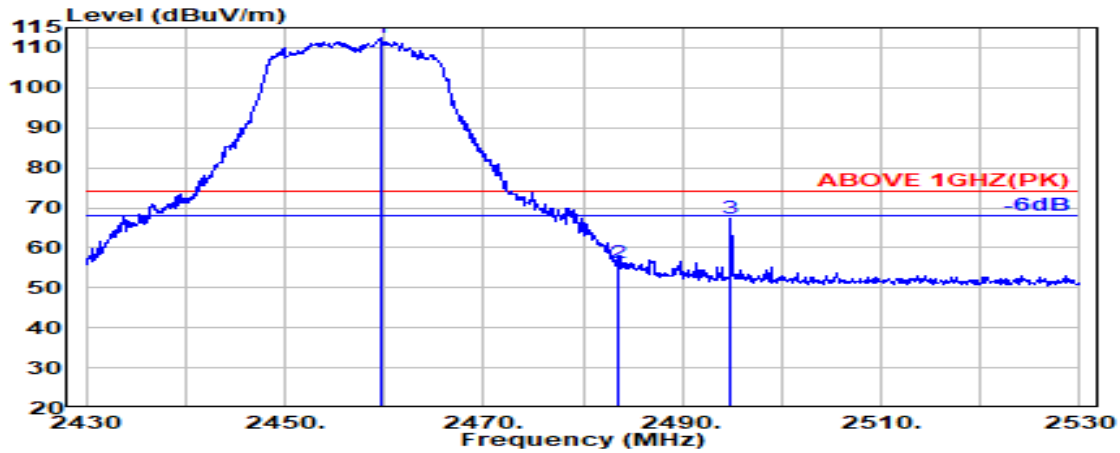

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.42	6.13	39.92	117.87	112.50	---	---	Peak
2483.500	28.47	6.17	39.92	61.49	56.20	74.00	17.80	Peak
2494.900	28.49	6.18	39.92	72.46	67.21	74.00	6.79	Peak

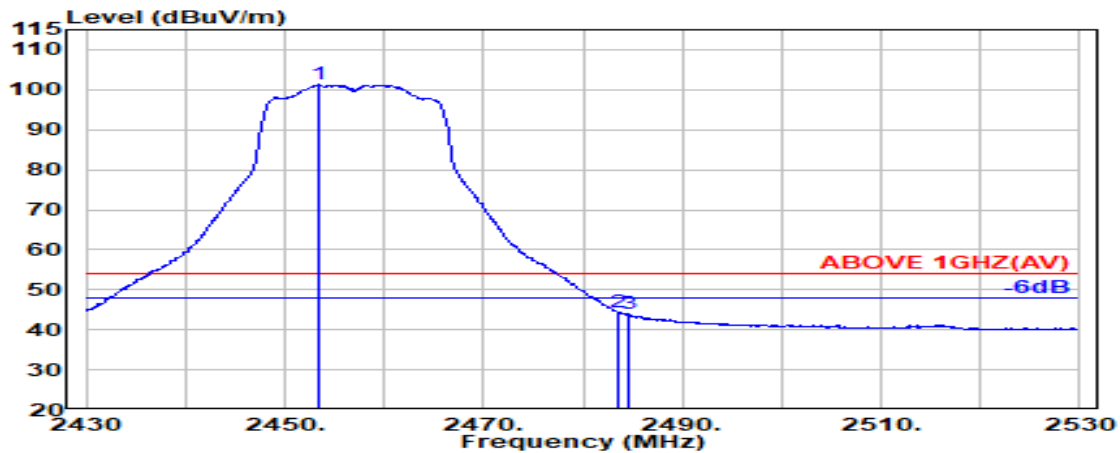


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.400	28.41	6.13	39.92	106.73	101.34	---	---	Average
2483.500	28.47	6.17	39.92	49.70	44.41	54.00	9.59	Average
2484.600	28.47	6.17	39.92	49.15	43.87	54.00	10.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

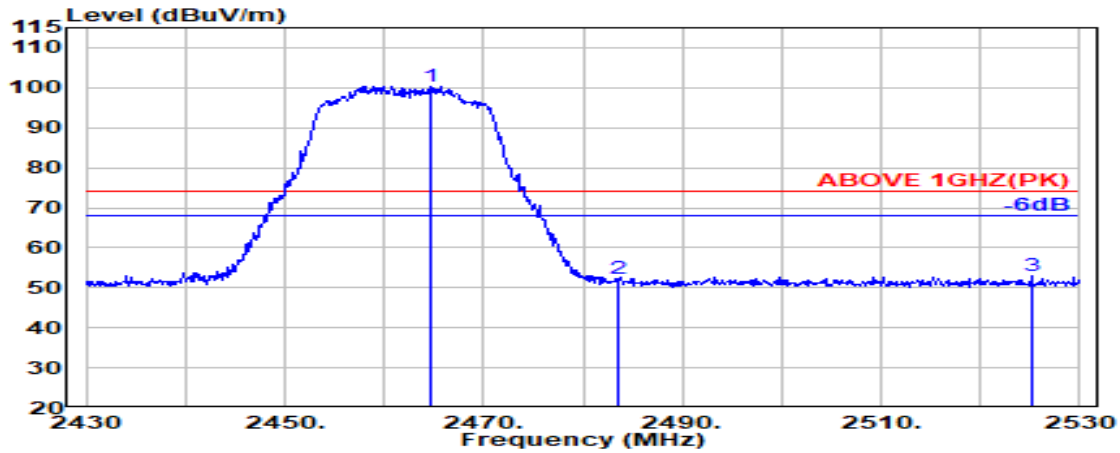

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	6.14	39.92	105.82	100.47	---	---	Peak
2483.500	28.47	6.17	39.92	57.55	52.26	74.00	21.74	Peak
2525.200	28.55	6.22	39.92	58.13	52.97	74.00	21.03	Peak

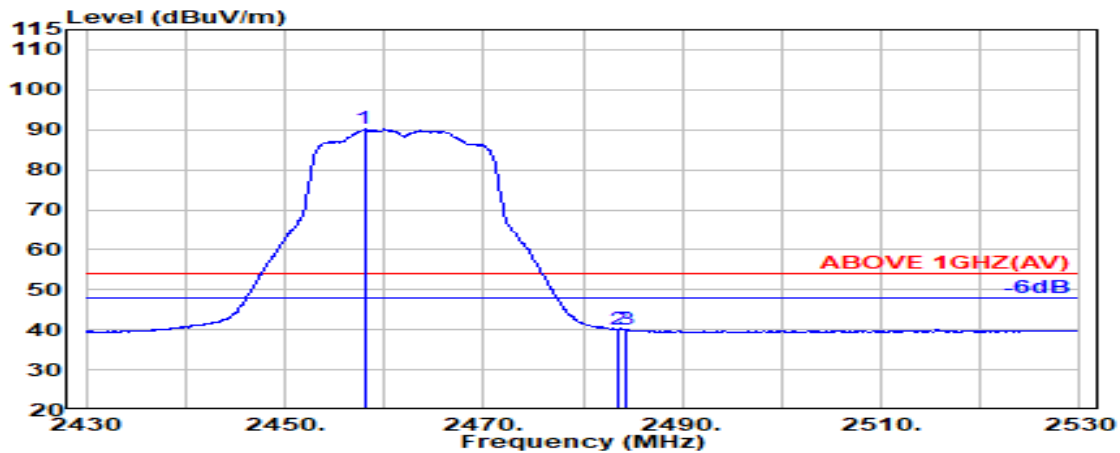


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.42	6.13	39.92	95.52	90.15	---	---	Average
2483.500	28.47	6.17	39.92	45.45	40.16	54.00	13.84	Average
2484.400	28.47	6.17	39.92	45.39	40.11	54.00	13.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

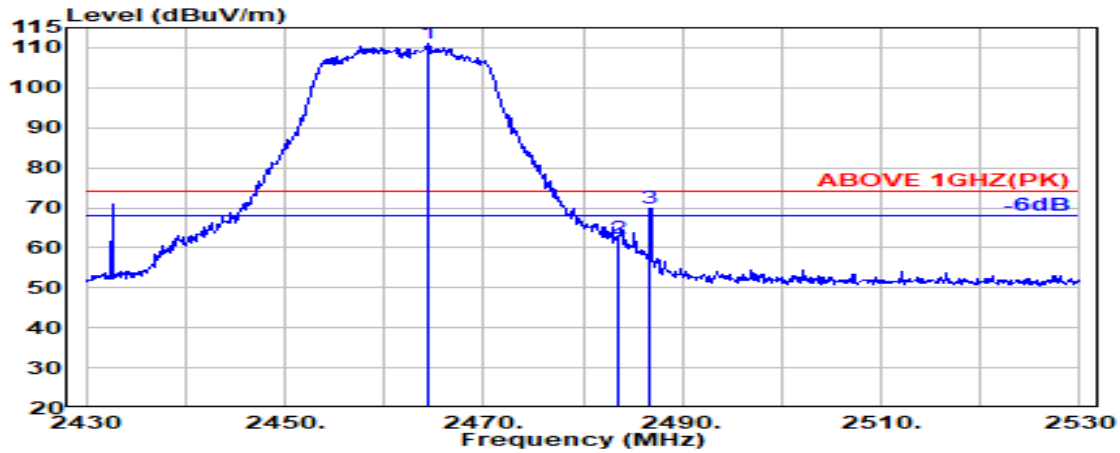

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	6.14	39.92	116.42	111.06	---	---	Peak
2483.500	28.47	6.17	39.92	67.64	62.36	74.00	11.64	Peak
2486.800	28.47	6.17	39.92	75.19	69.91	74.00	4.09	Peak

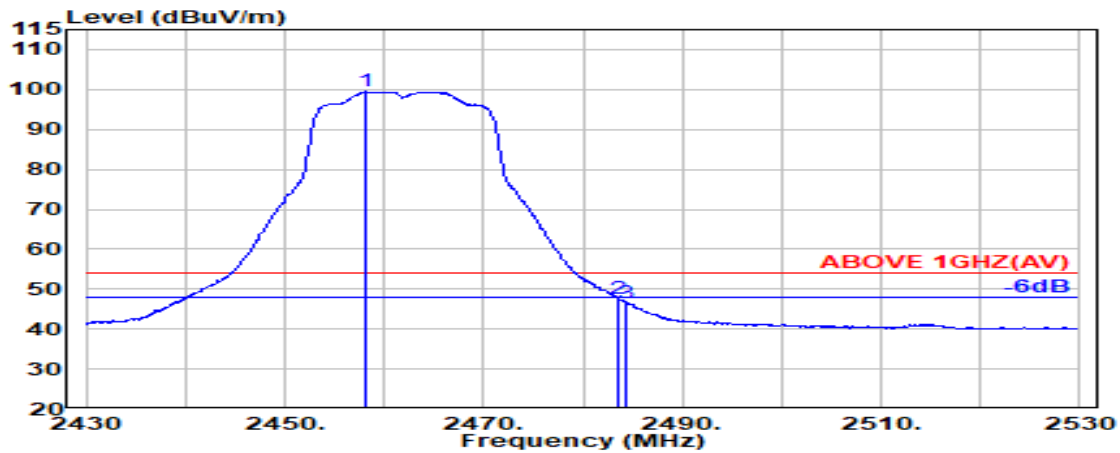


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.42	6.13	39.92	104.86	99.48	---	---	Average
2483.500	28.47	6.17	39.92	52.96	47.68	54.00	6.32	Average
2484.400	28.47	6.17	39.92	51.85	46.56	54.00	7.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

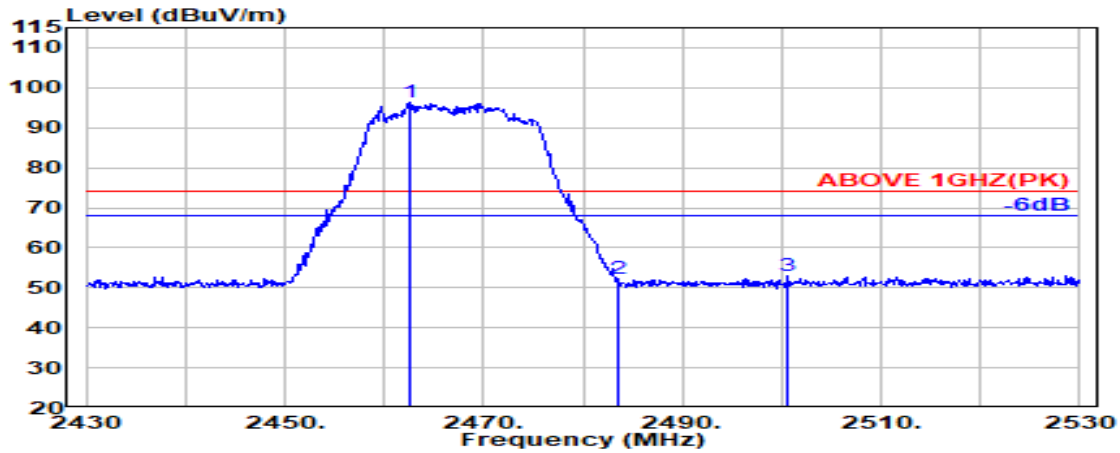

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	28.43	6.14	39.92	101.76	96.41	---	---	Peak
2483.500	28.47	6.17	39.92	57.44	52.15	74.00	21.85	Peak
2500.600	28.50	6.19	39.92	58.05	52.82	74.00	21.18	Peak

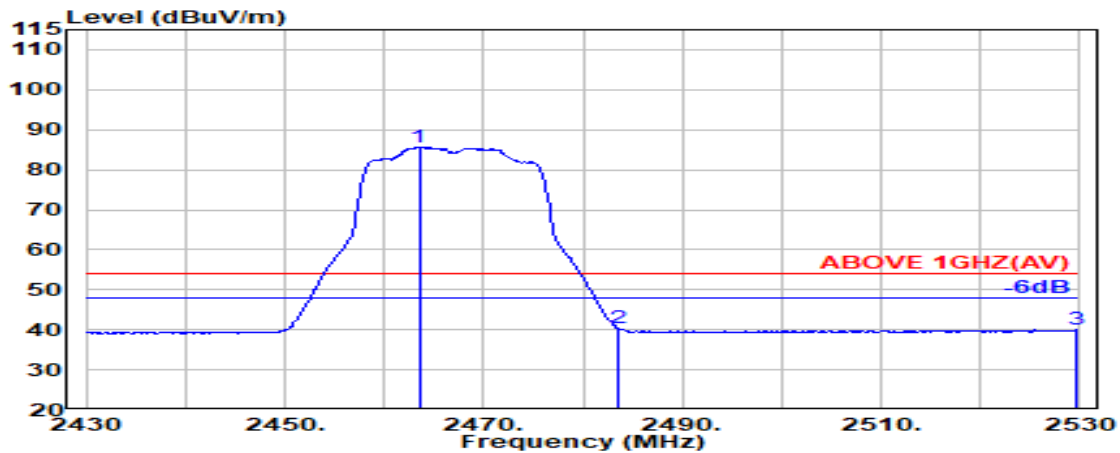


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	39.92	91.04	85.69	---	---	Average
2483.500	28.47	6.17	39.92	45.66	40.37	54.00	13.63	Average
2529.700	28.56	6.22	39.92	45.17	40.03	54.00	13.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

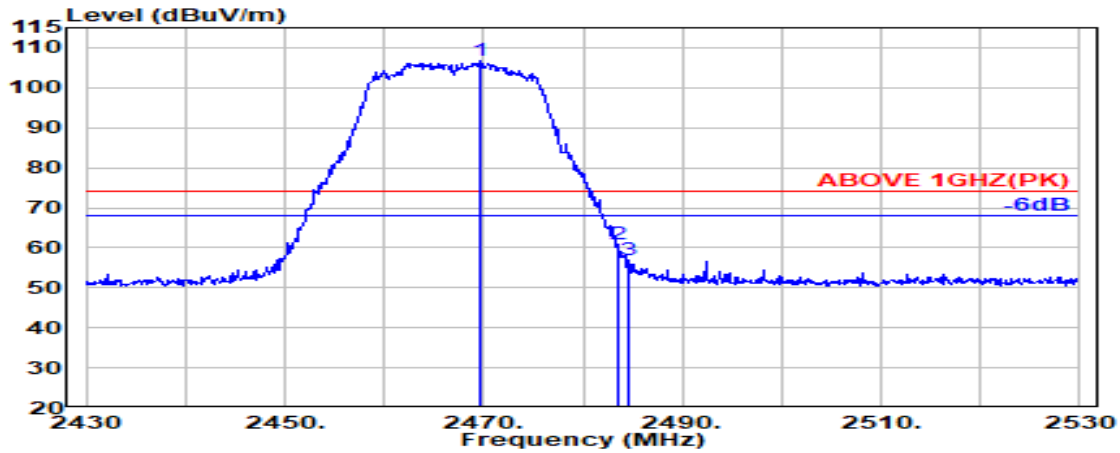

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.700	28.44	6.15	39.92	112.02	106.69	---	---	Peak
2483.500	28.47	6.17	39.92	66.05	60.77	74.00	13.23	Peak
2484.700	28.47	6.17	39.92	62.24	56.96	74.00	17.04	Peak

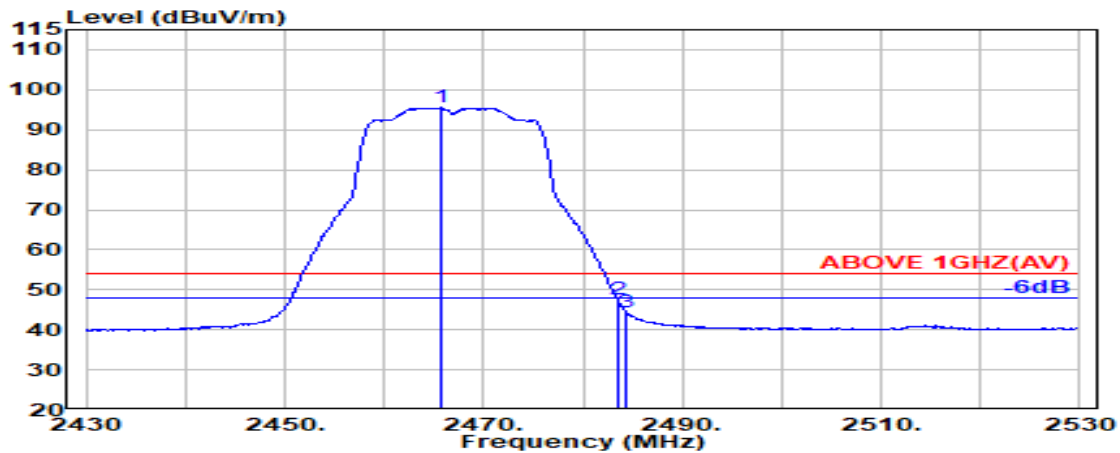


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.43	6.14	39.92	100.85	95.50	---	---	Average
2483.500	28.47	6.17	39.92	52.82	47.53	54.00	6.47	Average
2484.400	28.47	6.17	39.92	49.71	44.43	54.00	9.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

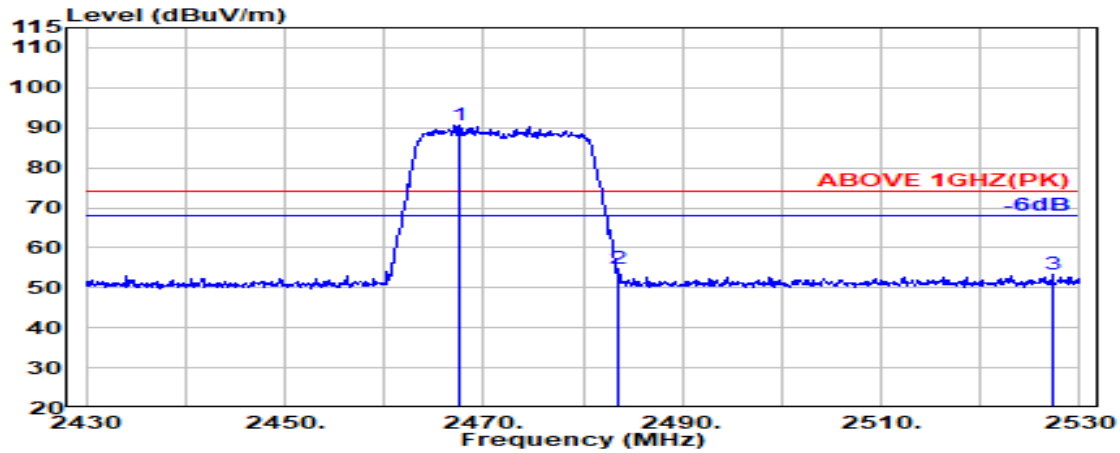

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.44	6.14	39.92	95.98	90.64	---	---	Peak
2483.500	28.47	6.17	39.92	59.99	54.70	74.00	19.30	Peak
2527.300	28.55	6.22	39.92	58.55	53.40	74.00	20.60	Peak

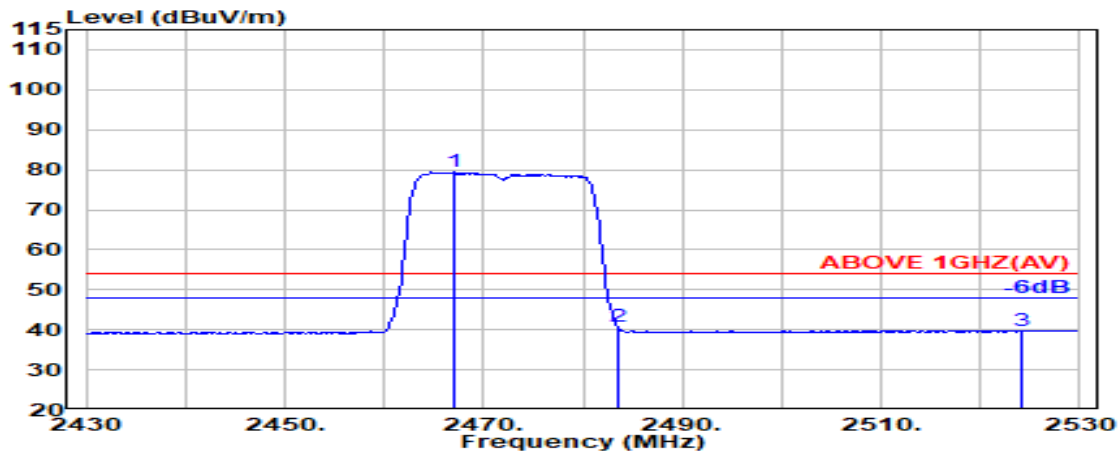


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	6.14	39.92	84.75	79.41	---	---	Average
2483.500	28.47	6.17	39.92	46.11	40.82	54.00	13.18	Average
2524.100	28.55	6.22	39.92	44.95	39.79	54.00	14.21	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

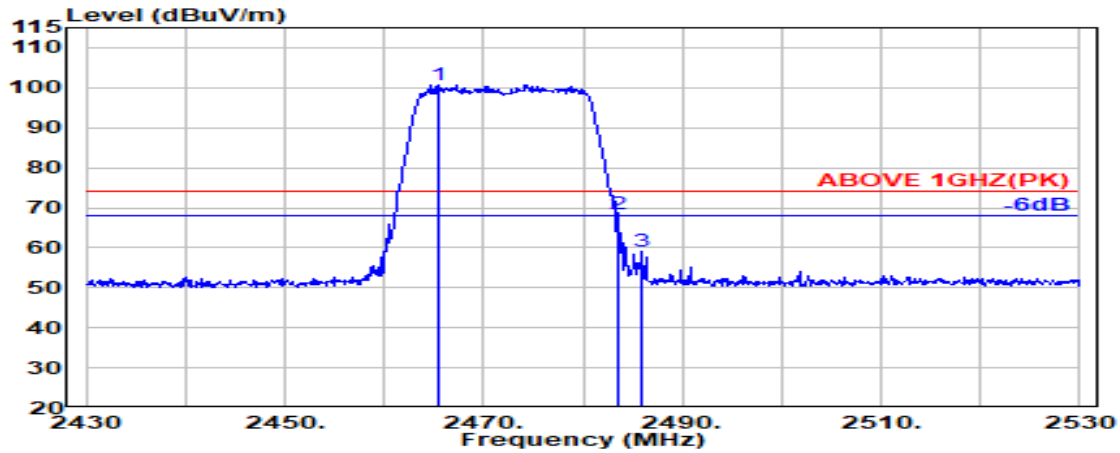

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	39.92	106.19	100.84	---	---	Peak
2483.500	28.47	6.17	39.92	73.52	68.23	74.00	5.77	Peak
2486.000	28.47	6.17	39.92	64.42	59.14	74.00	14.86	Peak

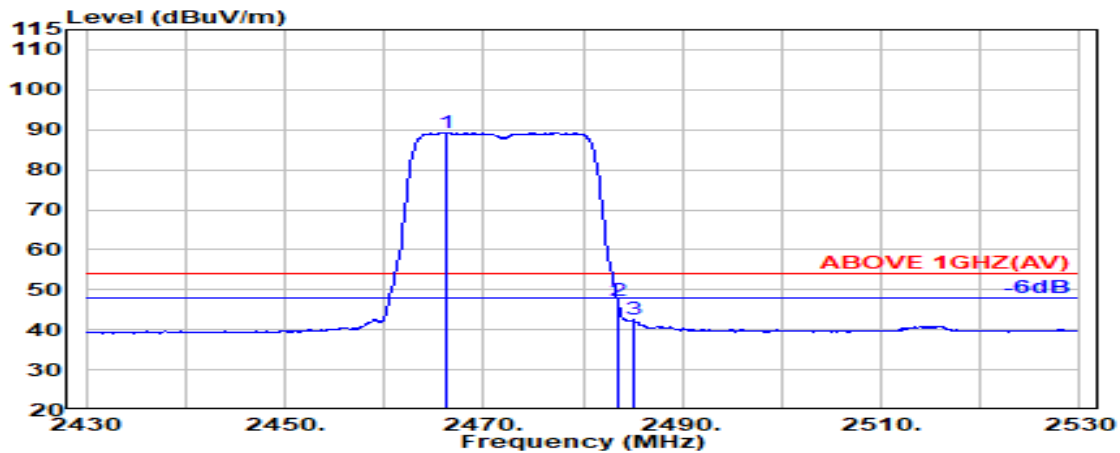


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	6.14	39.92	94.65	89.30	---	---	Average
2483.500	28.47	6.17	39.92	52.55	47.27	54.00	6.73	Average
2485.100	28.47	6.17	39.92	47.74	42.46	54.00	11.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

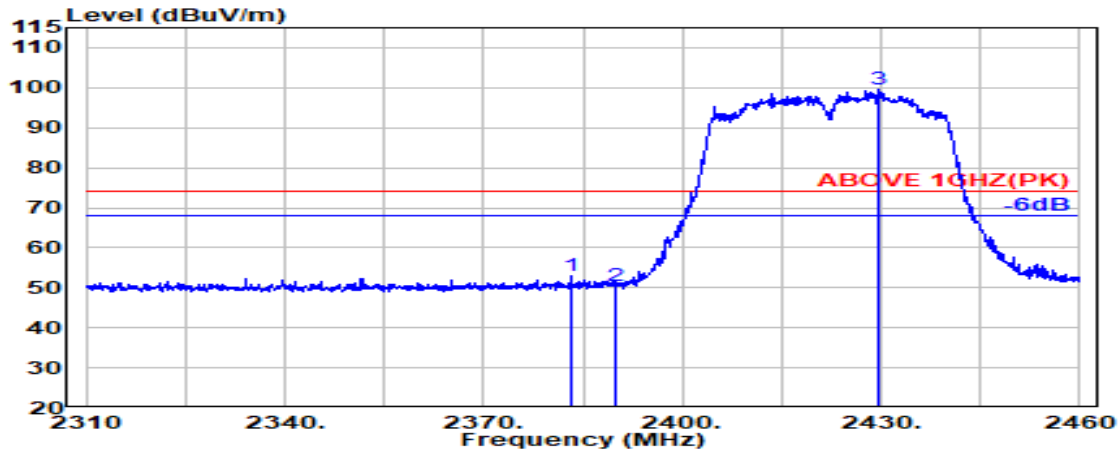

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2383.200	28.20	6.02	39.93	58.67	52.97	74.00	21.03	Peak
2390.000	28.20	6.03	39.93	56.05	50.35	74.00	23.65	Peak
@ 2429.700	28.32	6.09	39.93	105.23	99.71	---	---	Peak

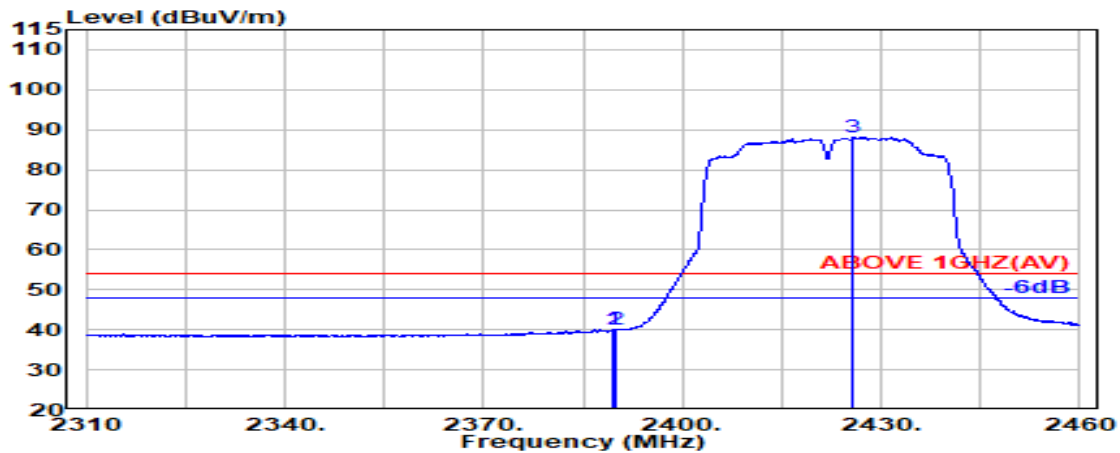


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	45.76	40.06	54.00	13.94	Average
2390.000	28.20	6.03	39.93	45.60	39.90	54.00	14.10	Average
@ 2425.800	28.30	6.09	39.93	93.68	88.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

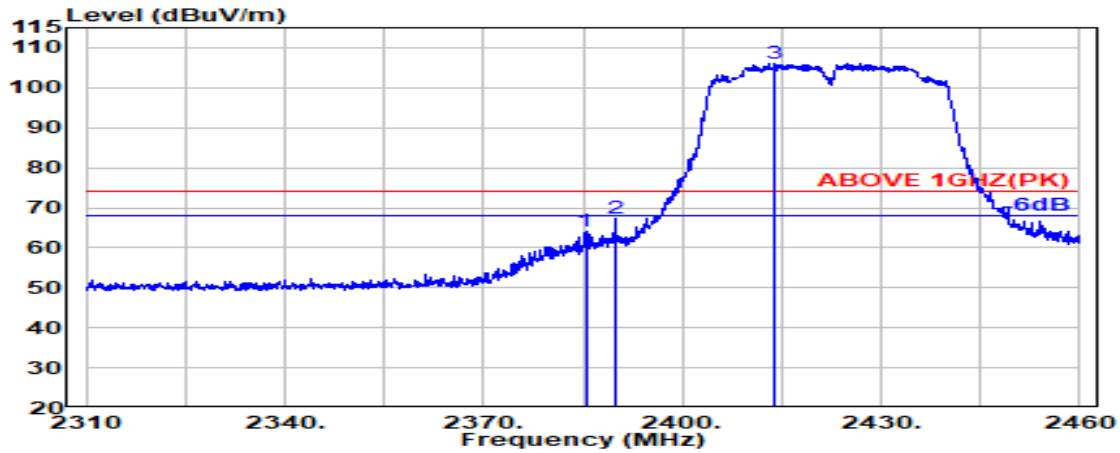

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.20	6.03	39.93	69.84	64.14	74.00	9.86	Peak
2390.000	28.20	6.03	39.93	72.92	67.22	74.00	6.78	Peak
@ 2413.800	28.26	6.07	39.93	111.71	106.11	---	---	Peak

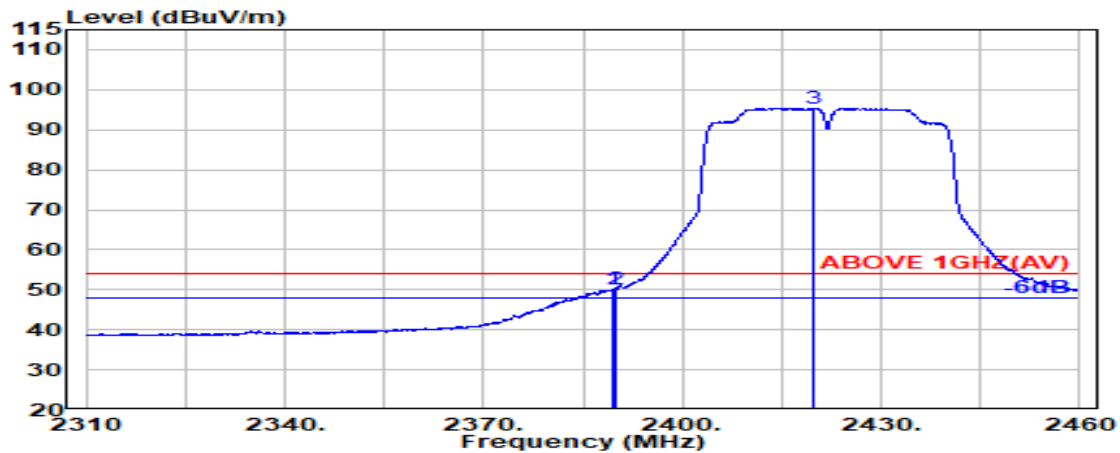


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	55.80	50.10	54.00	3.90	Average
2390.000	28.20	6.03	39.93	55.92	50.22	54.00	3.78	Average
@ 2419.700	28.28	6.08	39.93	101.01	95.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

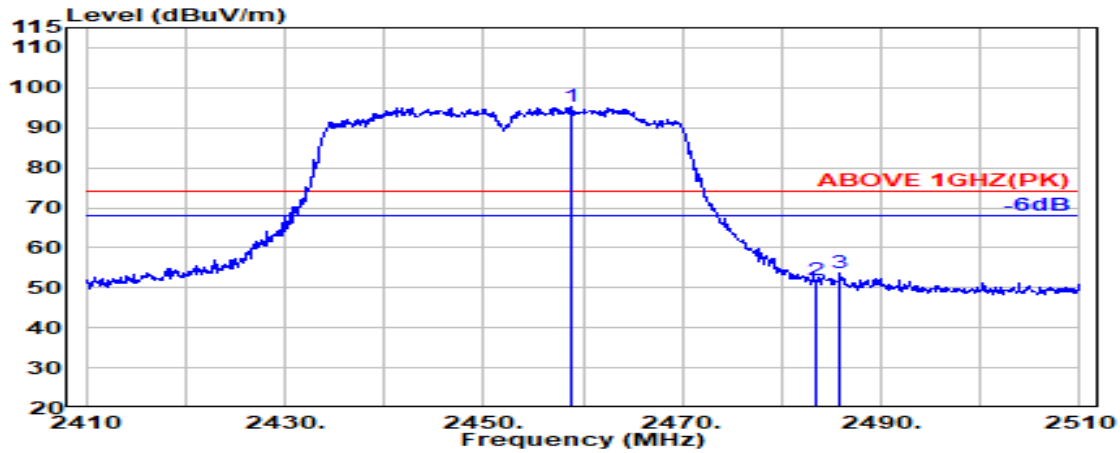

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.800	28.42	6.13	39.92	100.50	95.12	---	---	Peak
2483.500	28.47	6.17	39.92	57.19	51.91	74.00	22.09	Peak
2485.900	28.47	6.17	39.92	58.93	53.66	74.00	20.34	Peak

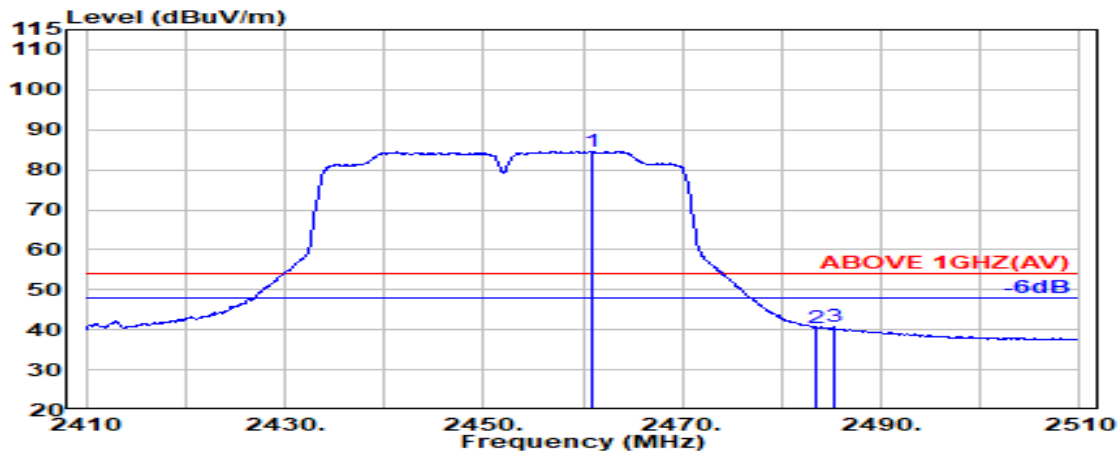


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.800	28.42	6.14	39.92	90.00	84.63	---	---	Average
2483.500	28.47	6.17	39.92	45.84	40.55	54.00	13.45	Average
2485.300	28.47	6.17	39.92	45.98	40.70	54.00	13.30	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

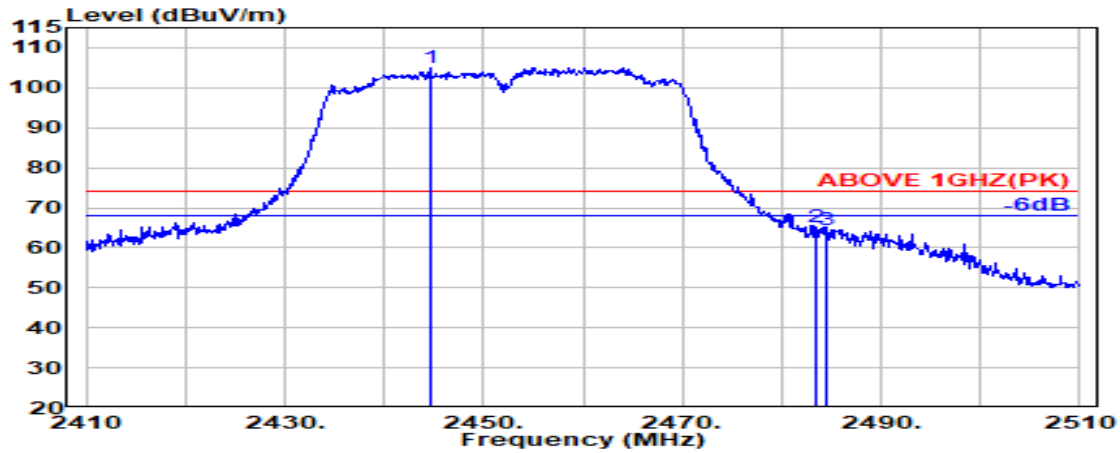

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.700	28.38	6.11	39.92	110.50	105.06	---	---	Peak
2483.500	28.47	6.17	39.92	70.38	65.09	74.00	8.91	Peak
2484.600	28.47	6.17	39.92	69.60	64.32	74.00	9.68	Peak

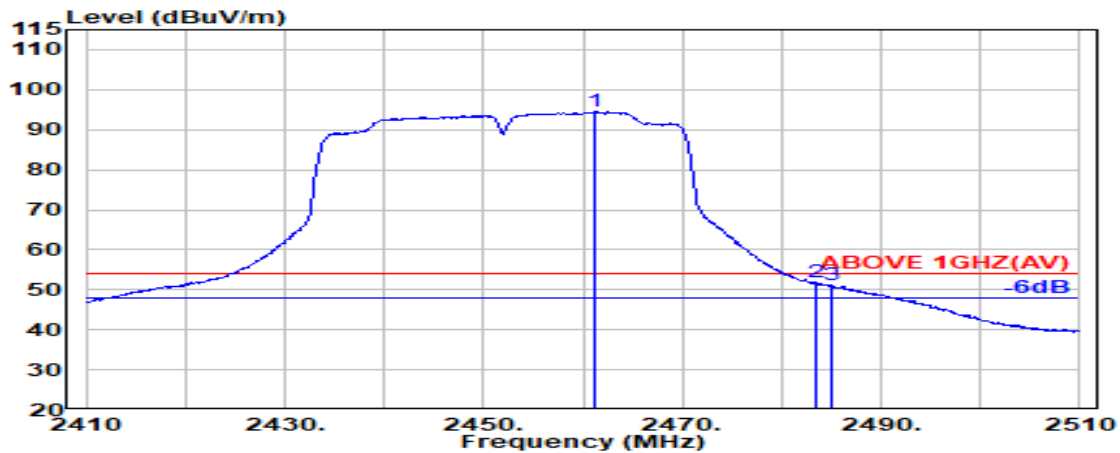


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.42	6.14	39.92	99.91	94.55	---	---	Average
2483.500	28.47	6.17	39.92	57.36	52.07	54.00	1.93	Average
2485.100	28.47	6.17	39.92	56.65	51.36	54.00	2.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

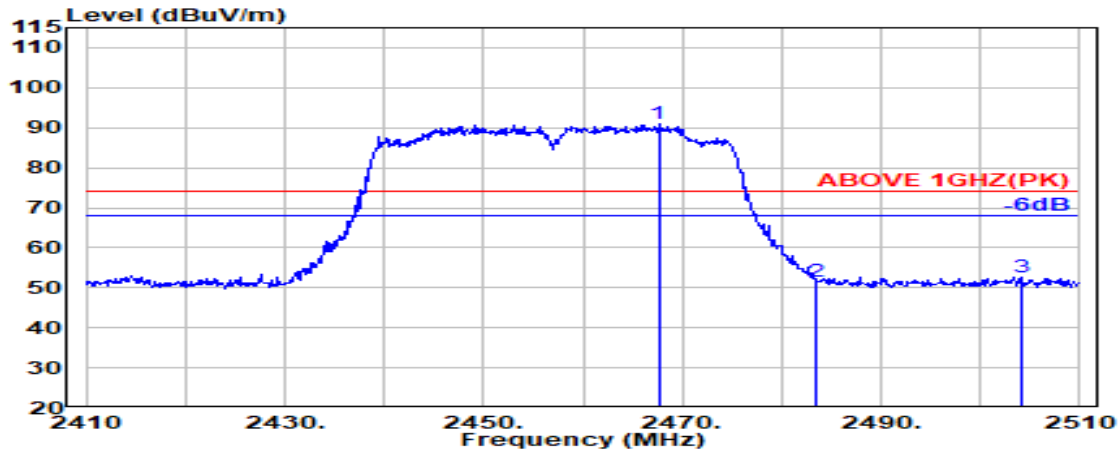

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.44	6.14	39.92	96.17	90.82	---	---	Peak
2483.500	28.47	6.17	39.92	56.92	51.64	74.00	22.36	Peak
2504.100	28.51	6.19	39.92	57.96	52.74	74.00	21.26	Peak

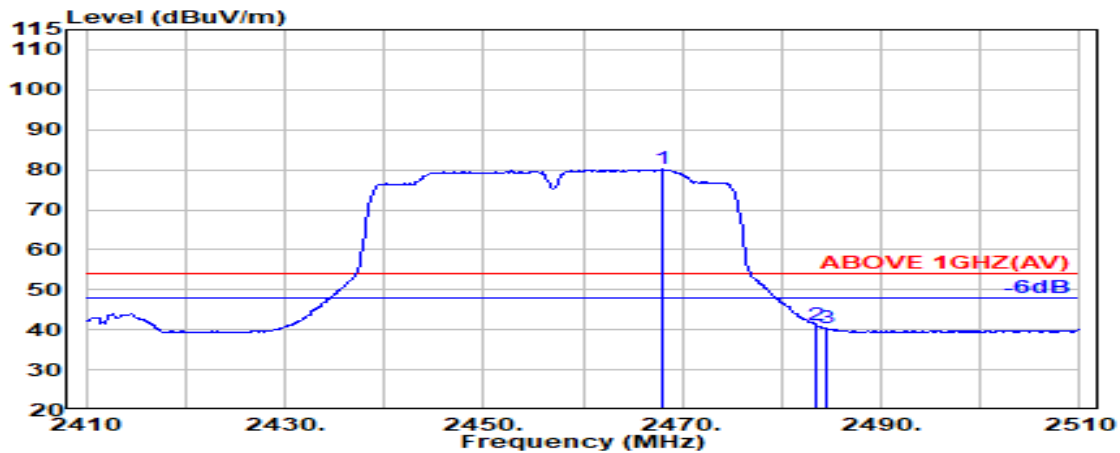


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	6.15	39.92	85.42	80.08	---	---	Average
2483.500	28.47	6.17	39.92	46.39	41.10	54.00	12.90	Average
2484.400	28.47	6.17	39.92	45.66	40.38	54.00	13.62	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

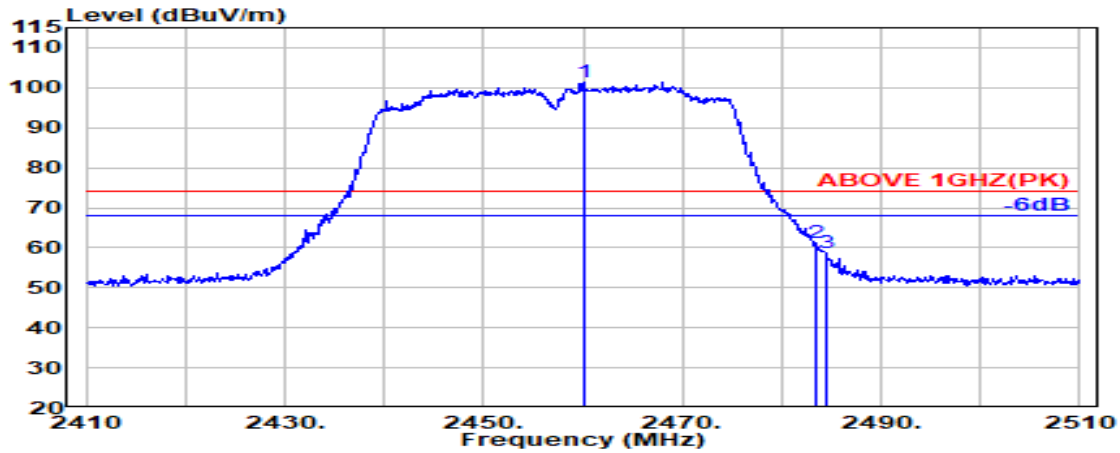

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	39.92	106.78	101.41	---	---	Peak
2483.500	28.47	6.17	39.92	66.51	61.22	74.00	12.78	Peak
2484.400	28.47	6.17	39.92	63.95	58.66	74.00	15.34	Peak

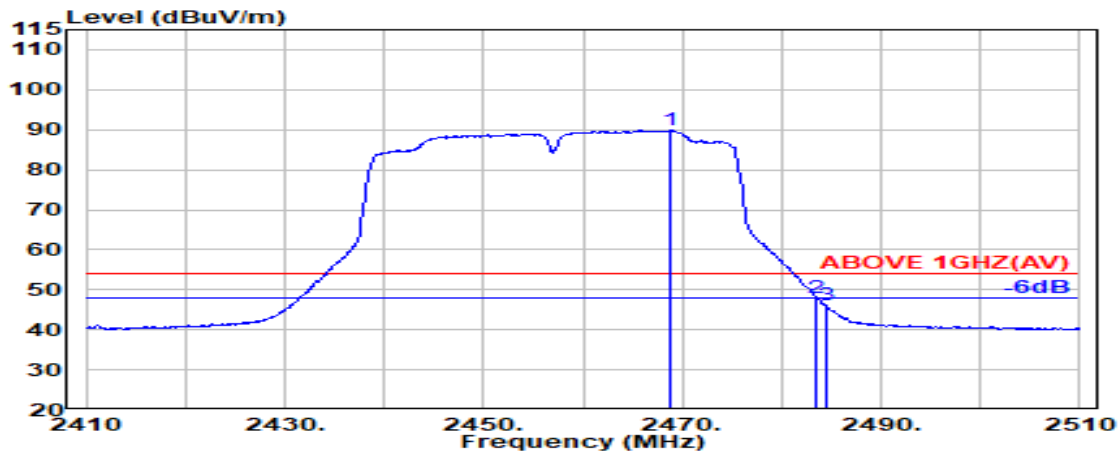


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.44	6.15	39.92	95.19	89.85	---	---	Average
2483.500	28.47	6.17	39.92	53.32	48.03	54.00	5.97	Average
2484.400	28.47	6.17	39.92	51.48	46.19	54.00	7.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

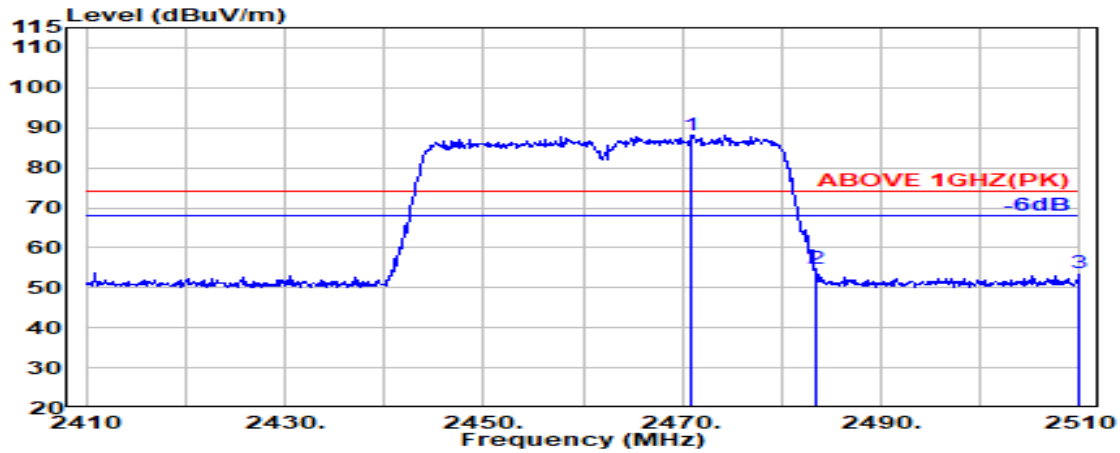

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	6.15	39.92	93.61	88.28	---	---	Peak
2483.500	28.47	6.17	39.92	60.20	54.91	74.00	19.09	Peak
2510.000	28.52	6.20	39.92	58.81	53.61	74.00	20.39	Peak

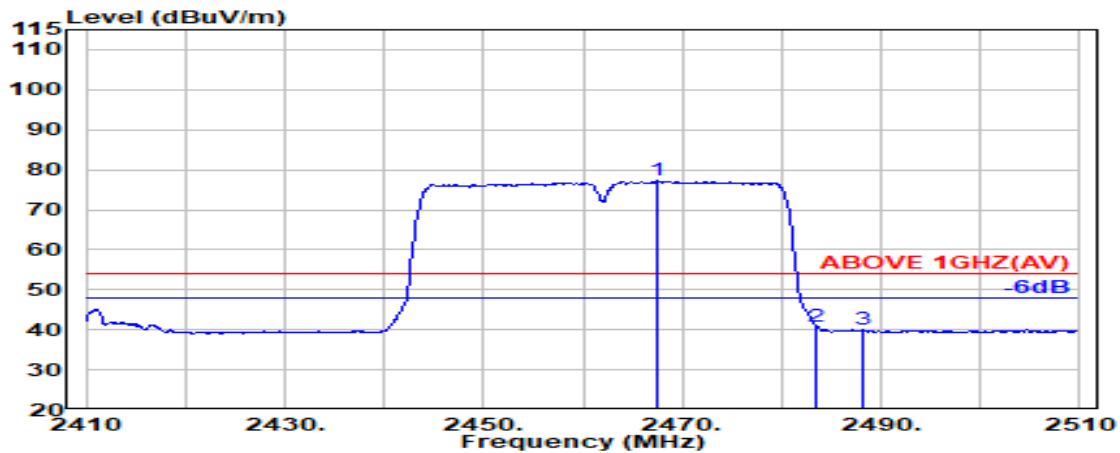


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.44	6.14	39.92	82.54	77.19	---	---	Average
2483.500	28.47	6.17	39.92	46.24	40.96	54.00	13.04	Average
2488.100	28.48	6.17	39.92	45.26	39.98	54.00	14.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

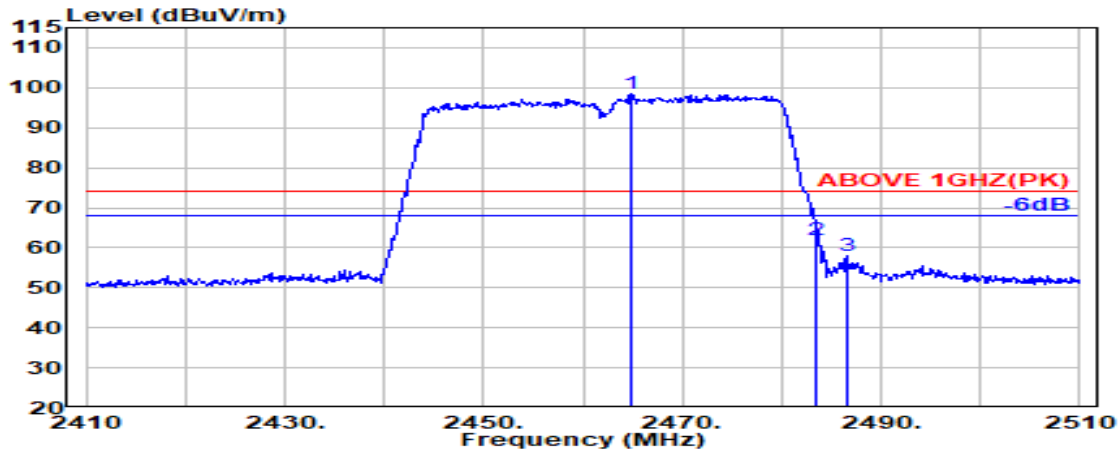

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	39.92	103.94	98.59	---	---	Peak
2483.500	28.47	6.17	39.92	67.23	61.94	74.00	12.06	Peak
2486.500	28.47	6.17	39.92	63.42	58.14	74.00	15.86	Peak

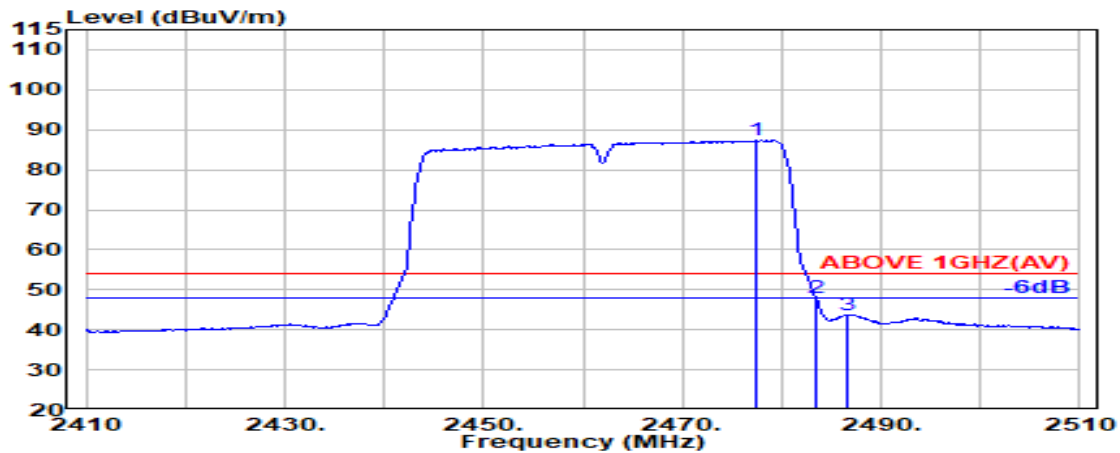


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.400	28.46	6.16	39.92	92.65	87.34	---	---	Average
2483.500	28.47	6.17	39.92	53.14	47.85	54.00	6.15	Average
2486.500	28.47	6.17	39.92	49.02	43.74	54.00	10.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

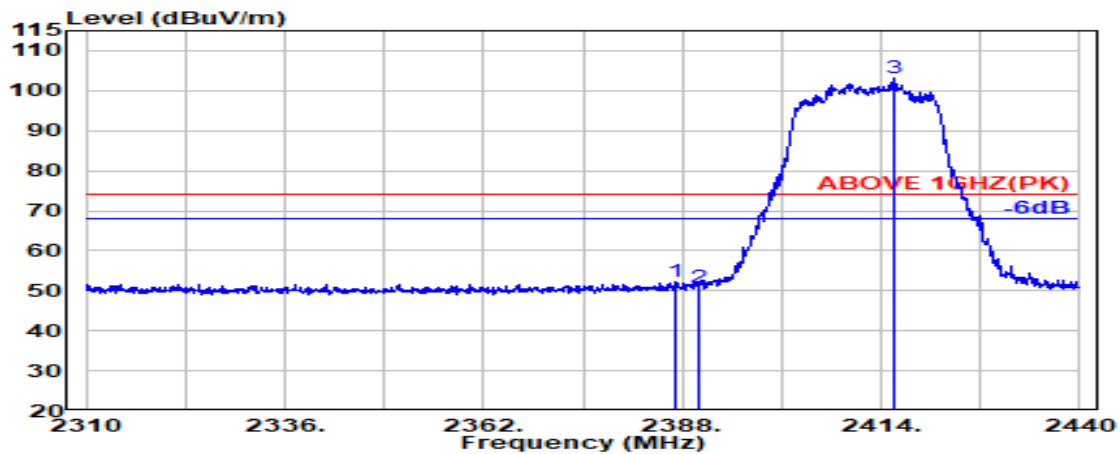

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.20	6.03	39.93	57.80	52.10	74.00	21.90	Peak
2390.000	28.20	6.03	39.93	56.63	50.94	74.00	23.06	Peak
@ 2415.700	28.26	6.07	39.93	108.70	103.11	---	---	Peak

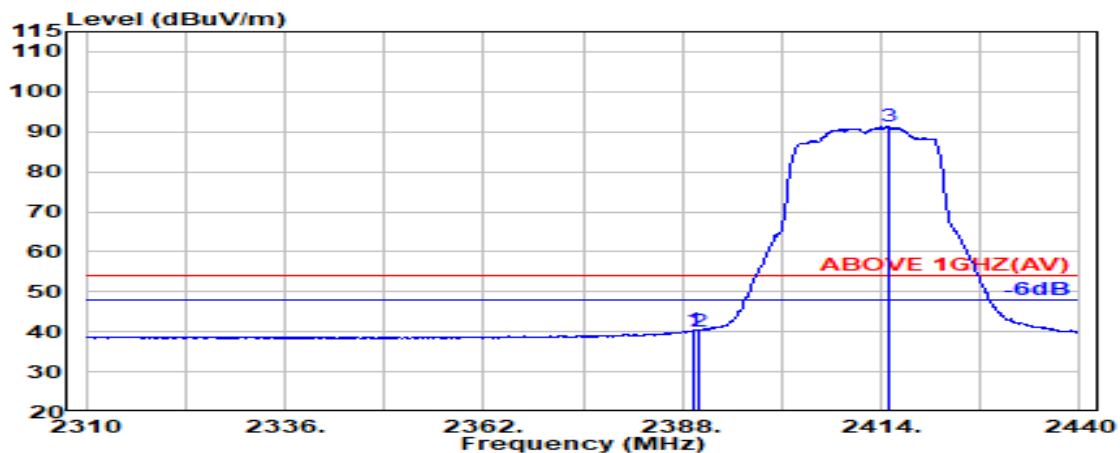


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	46.04	40.34	54.00	13.66	Average
2390.000	28.20	6.03	39.93	45.89	40.20	54.00	13.80	Average
@ 2415.100	28.26	6.07	39.93	96.94	91.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

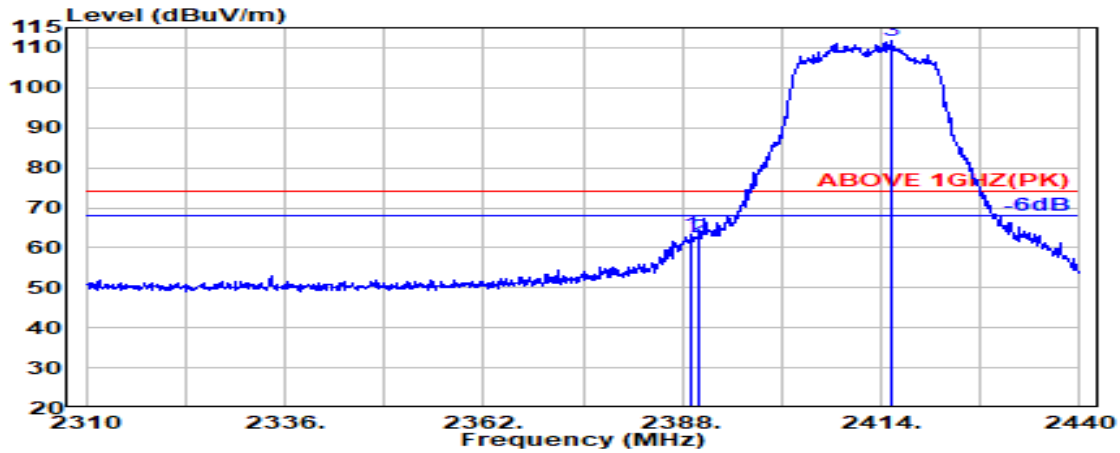

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	6.03	39.93	69.24	63.55	74.00	10.45	Peak
2390.000	28.20	6.03	39.93	68.26	62.57	74.00	11.43	Peak
@ 2415.400	28.26	6.07	39.93	117.27	111.67	---	---	Peak

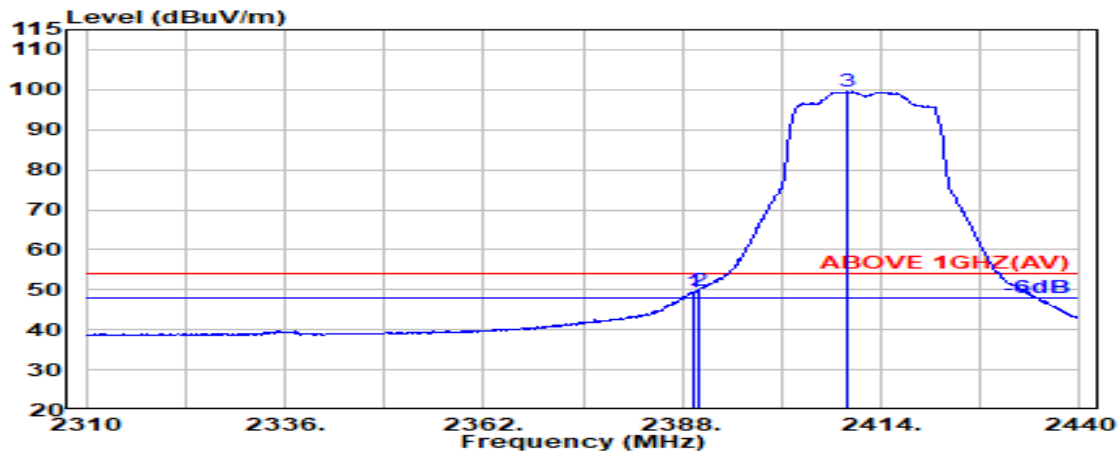


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	55.25	49.56	54.00	4.44	Average
2390.000	28.20	6.03	39.93	55.56	49.87	54.00	4.13	Average
@ 2409.600	28.24	6.06	39.93	105.08	99.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

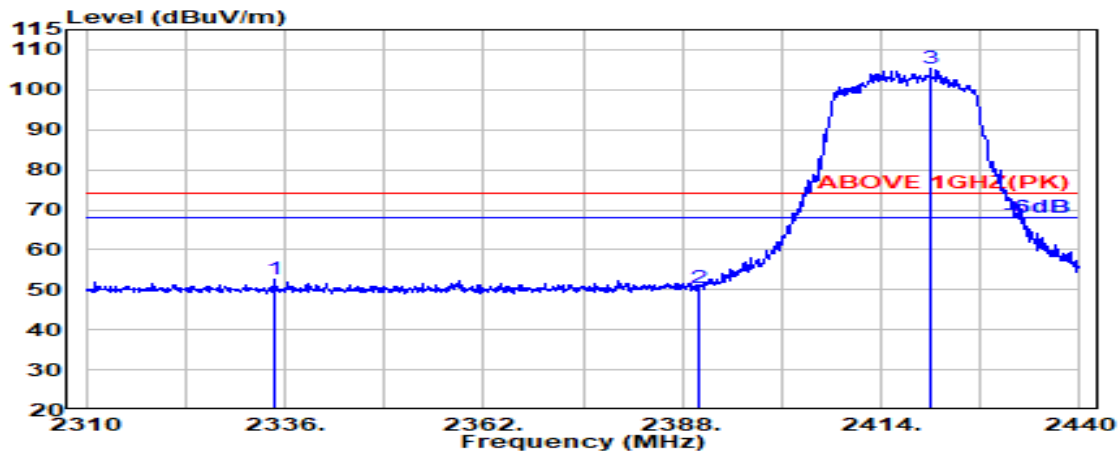

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.500	28.05	5.95	39.93	58.43	52.50	74.00	21.50	Peak
2390.000	28.20	6.03	39.93	56.29	50.60	74.00	23.40	Peak
@ 2420.400	28.28	6.08	39.93	110.72	105.16	---	---	Peak

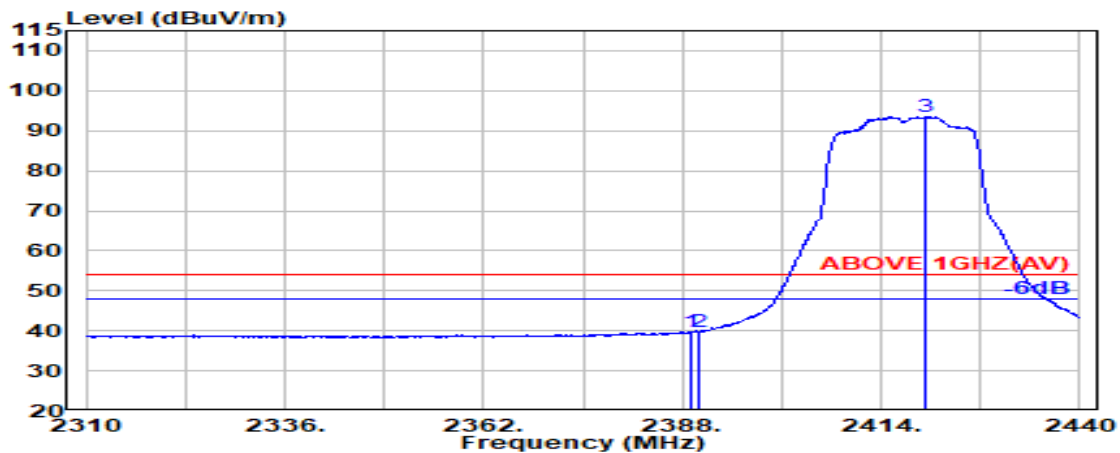


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	45.50	39.80	54.00	14.20	Average
2390.000	28.20	6.03	39.93	45.48	39.79	54.00	14.21	Average
@ 2419.800	28.28	6.08	39.93	99.13	93.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

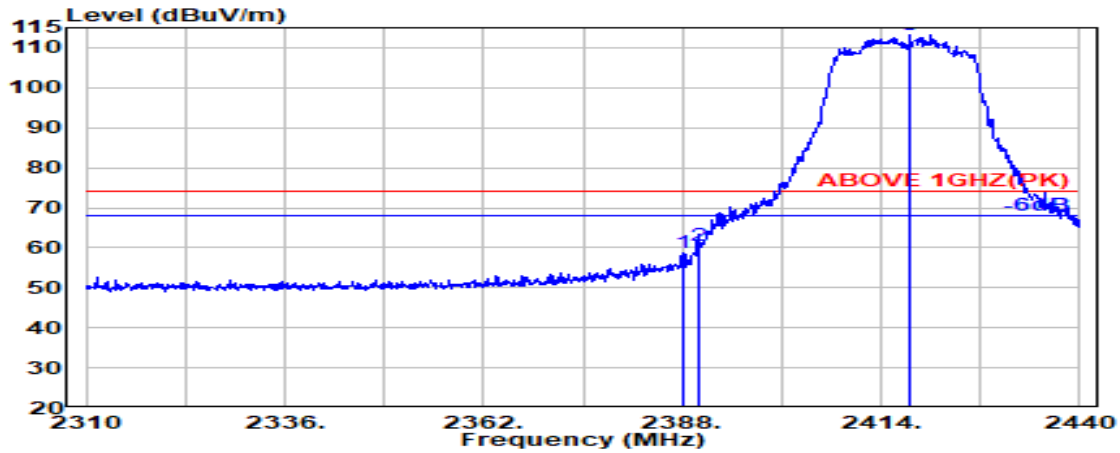

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	6.03	39.93	64.53	58.83	74.00	15.17	Peak
2390.000	28.20	6.03	39.93	66.24	60.55	74.00	13.45	Peak
@ 2417.800	28.27	6.07	39.93	118.85	113.27	---	---	Peak

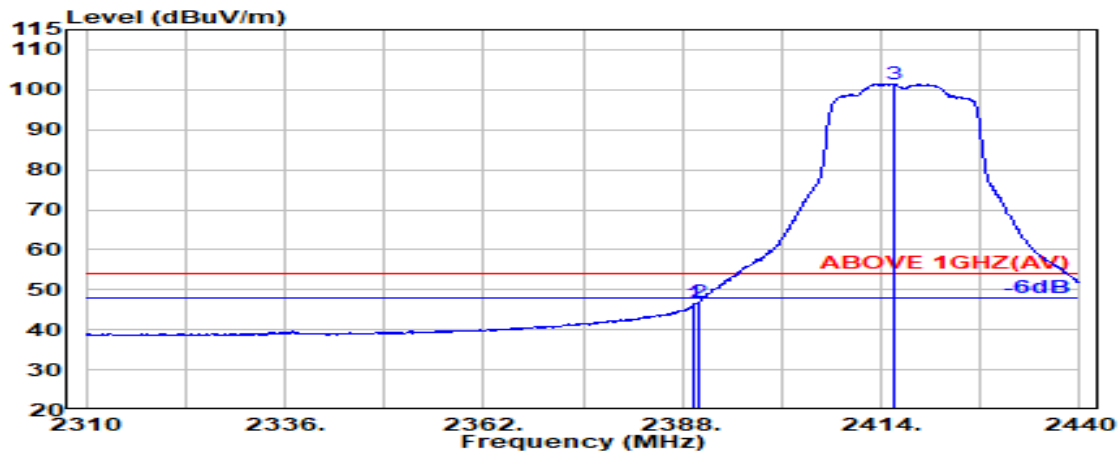


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	52.07	46.38	54.00	7.62	Average
2390.000	28.20	6.03	39.93	52.60	46.91	54.00	7.09	Average
@ 2415.700	28.26	6.07	39.93	107.05	101.46	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

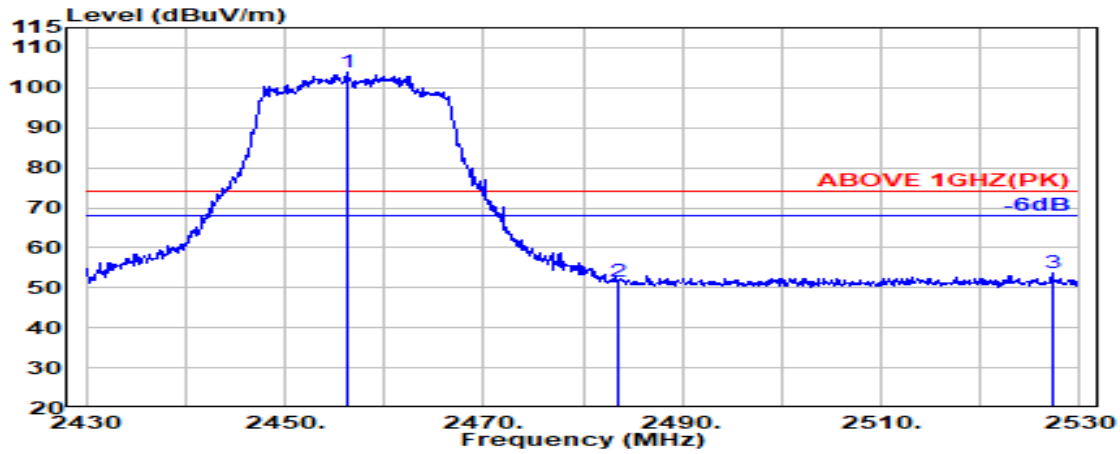

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.300	28.41	6.13	39.92	109.38	103.99	---	---	Peak
2483.500	28.47	6.17	39.92	56.95	51.67	74.00	22.33	Peak
2527.200	28.55	6.22	39.92	58.94	53.79	74.00	20.21	Peak

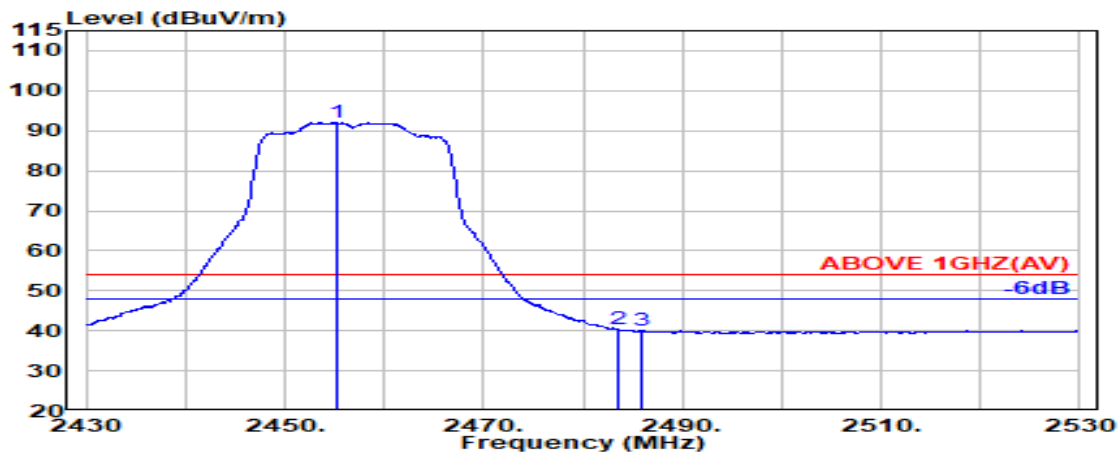


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.200	28.41	6.13	39.92	97.47	92.09	---	---	Average
2483.500	28.47	6.17	39.92	45.65	40.36	54.00	13.64	Average
2486.000	28.47	6.17	39.92	45.39	40.11	54.00	13.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

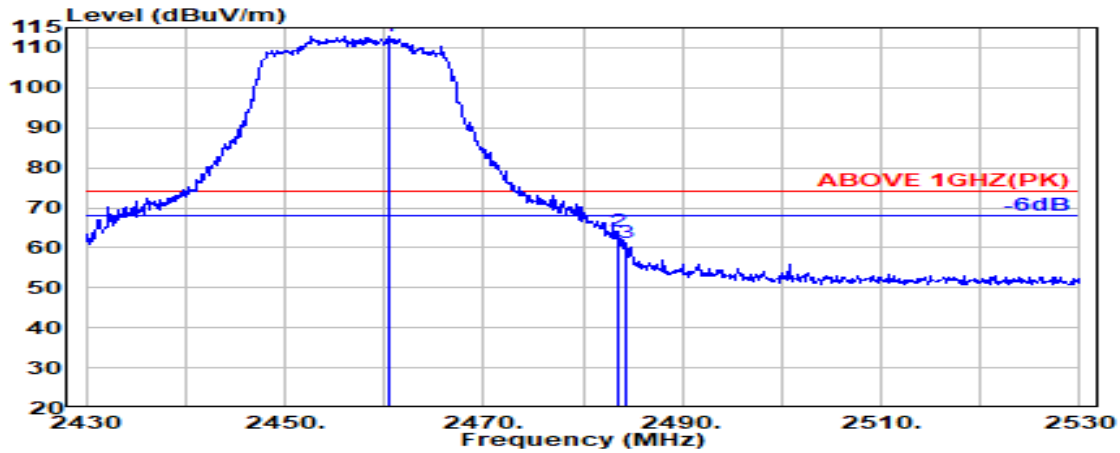

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.600	28.42	6.14	39.92	118.39	113.03	---	---	Peak
2483.500	28.47	6.17	39.92	69.27	63.98	74.00	10.02	Peak
2484.400	28.47	6.17	39.92	66.43	61.14	74.00	12.86	Peak

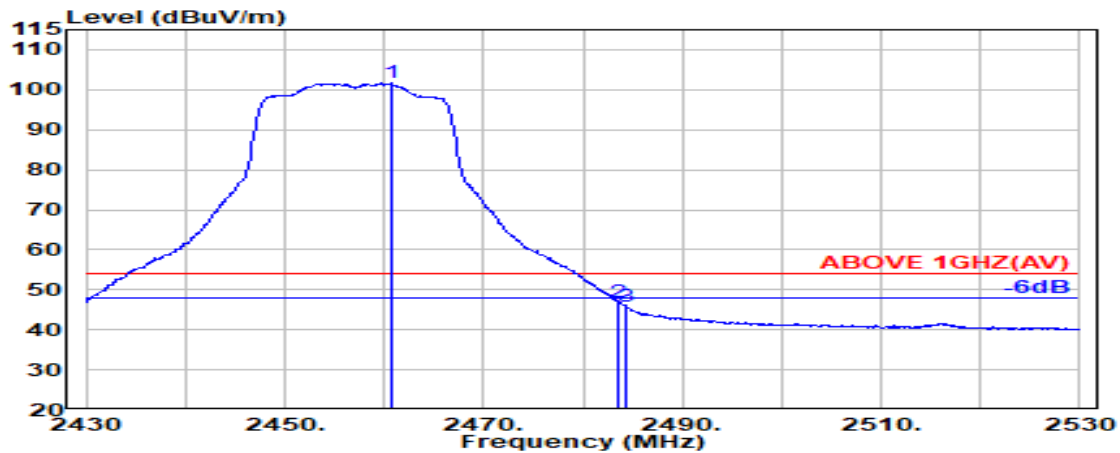


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.42	6.14	39.92	107.02	101.65	---	---	Average
2483.500	28.47	6.17	39.92	52.23	46.94	54.00	7.06	Average
2484.400	28.47	6.17	39.92	50.99	45.70	54.00	8.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

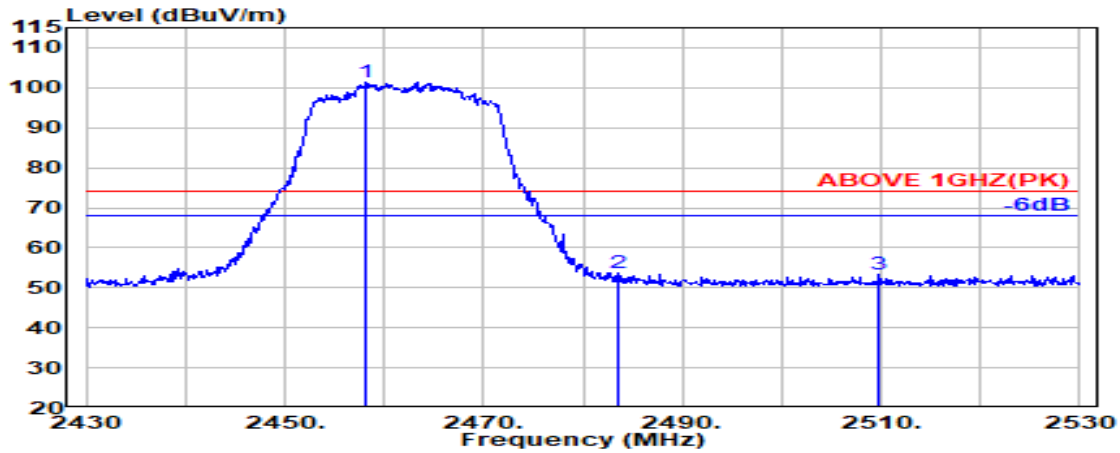

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.200	28.42	6.13	39.92	106.85	101.48	---	---	Peak
2483.500	28.47	6.17	39.92	58.88	53.60	74.00	20.40	Peak
2509.800	28.52	6.20	39.92	58.39	53.19	74.00	20.81	Peak

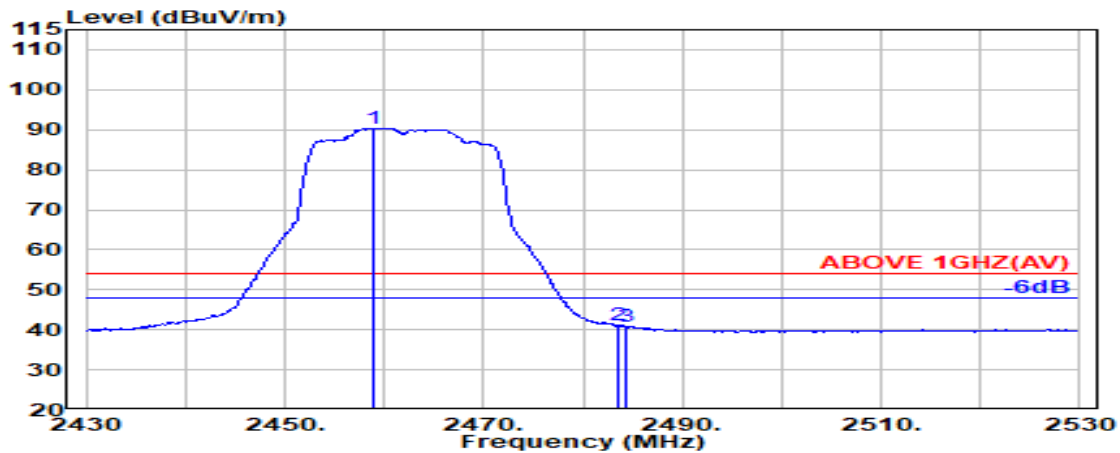


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.42	6.13	39.92	95.80	90.42	---	---	Average
2483.500	28.47	6.17	39.92	46.39	41.10	54.00	12.90	Average
2484.400	28.47	6.17	39.92	46.05	40.77	54.00	13.23	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

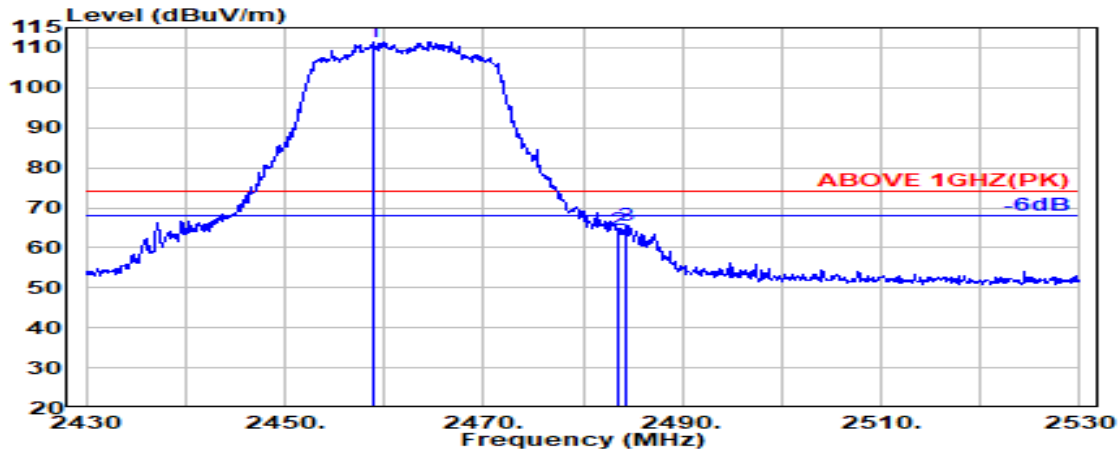

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.42	6.13	39.92	116.89	111.52	---	---	Peak
2483.500	28.47	6.17	39.92	69.87	64.59	74.00	9.41	Peak
2484.400	28.47	6.17	39.92	70.98	65.70	74.00	8.30	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.43	6.14	39.92	105.45	100.10	---	---	Average
2483.500	28.47	6.17	39.92	55.66	50.37	54.00	3.63	Average
2484.400	28.47	6.17	39.92	54.66	49.37	54.00	4.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

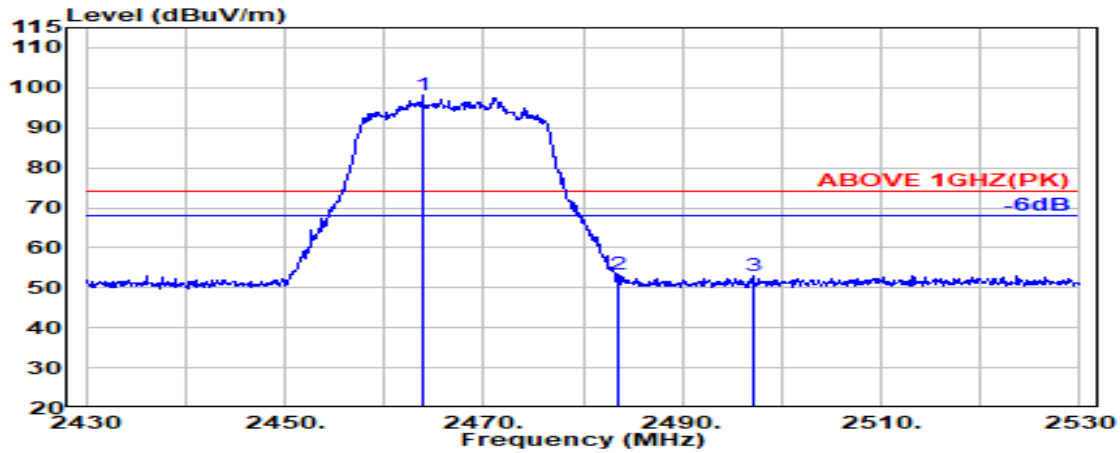

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	28.43	6.14	39.92	103.41	98.06	---	---	Peak
2483.500	28.47	6.17	39.92	58.61	53.32	74.00	20.68	Peak
2497.100	28.49	6.19	39.92	58.32	53.08	74.00	20.92	Peak

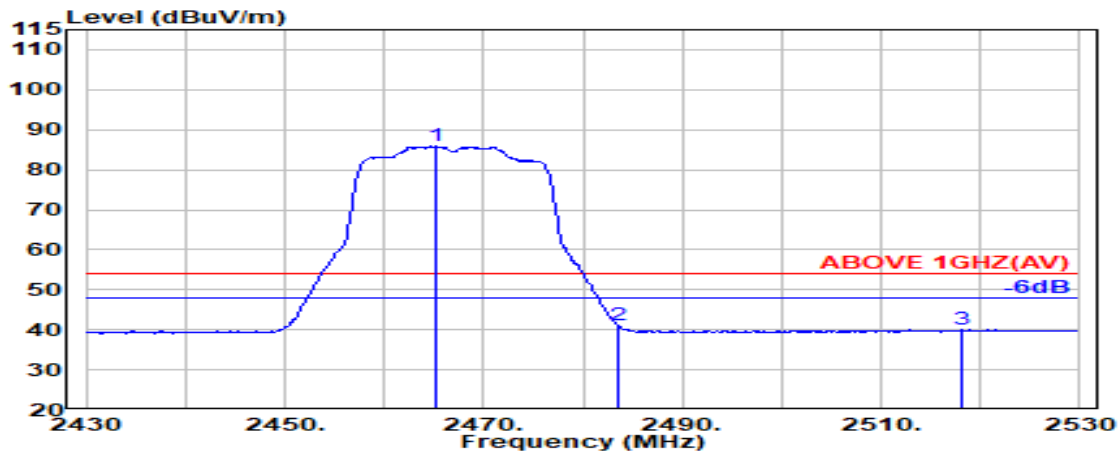


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	39.92	91.16	85.81	---	---	Average
2483.500	28.47	6.17	39.92	46.52	41.23	54.00	12.77	Average
2518.100	28.54	6.21	39.92	45.27	40.09	54.00	13.91	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

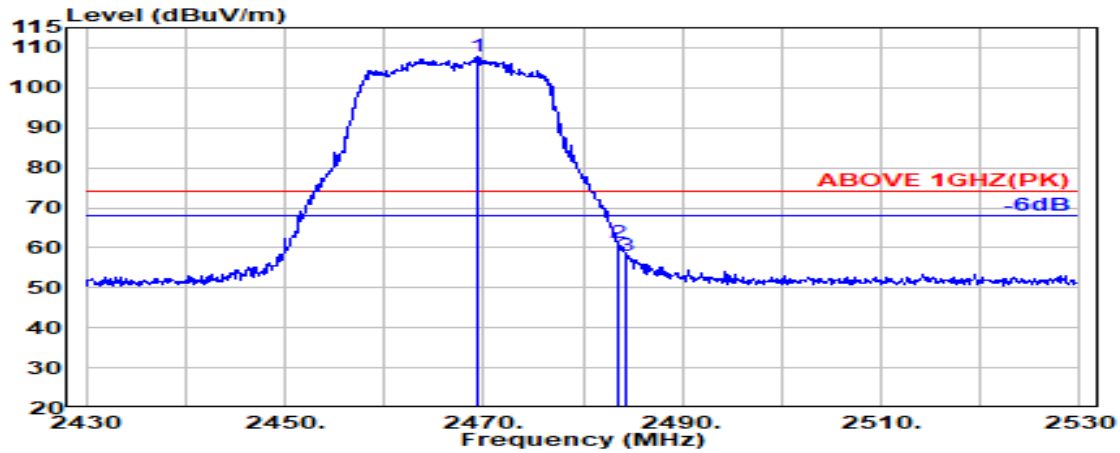

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	39.92	113.11	107.77	---	---	Peak
2483.500	28.47	6.17	39.92	66.65	61.36	74.00	12.64	Peak
2484.400	28.47	6.17	39.92	63.36	58.08	74.00	15.92	Peak

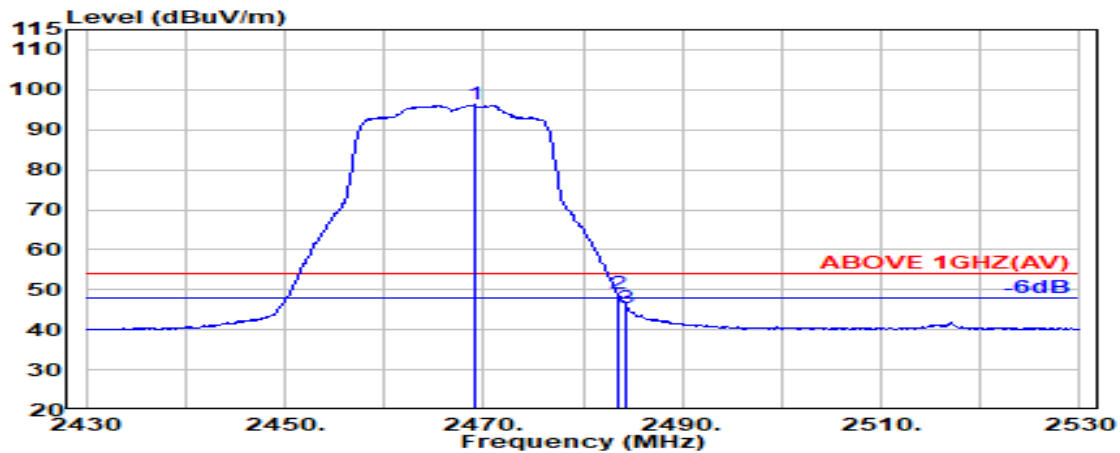


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	28.44	6.15	39.92	101.55	96.22	---	---	Average
2483.500	28.47	6.17	39.92	54.41	49.13	54.00	4.87	Average
2484.400	28.47	6.17	39.92	50.88	45.60	54.00	8.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

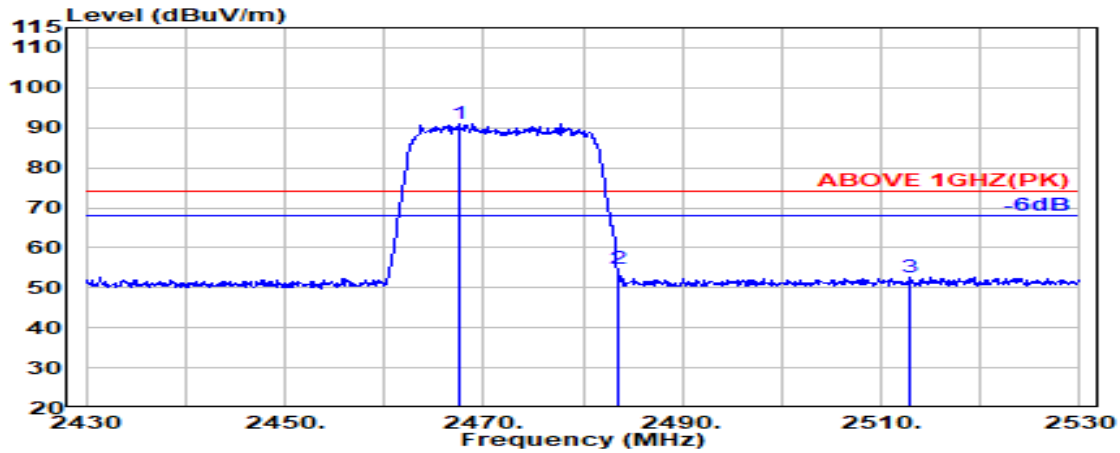

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.44	6.14	39.92	96.49	91.15	---	---	Peak
2483.500	28.47	6.17	39.92	59.89	54.61	74.00	19.39	Peak
2512.900	28.53	6.21	39.92	57.76	52.57	74.00	21.43	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.43	6.14	39.92	85.01	79.66	---	---	Average
2483.500	28.47	6.17	39.92	46.91	41.63	54.00	12.37	Average
2528.700	28.56	6.22	39.92	45.14	40.00	54.00	14.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

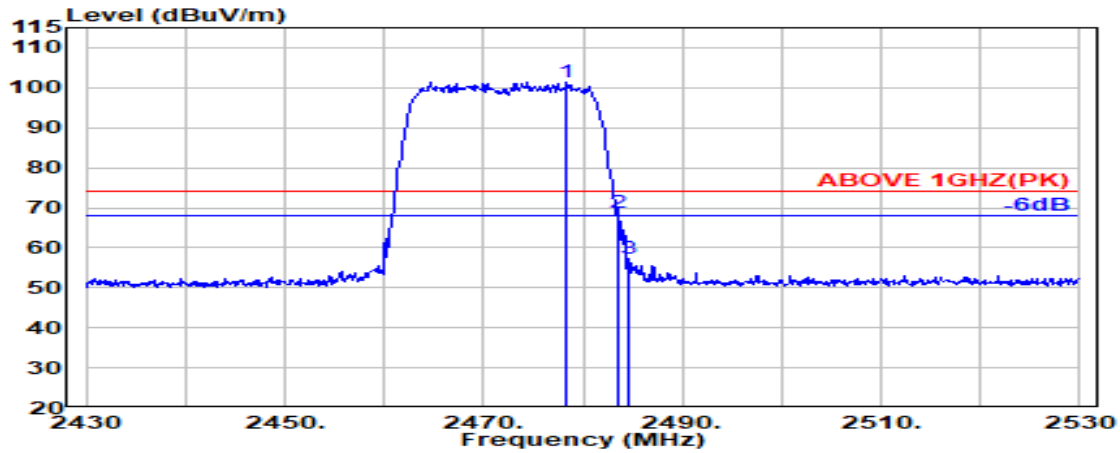

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	6.16	39.92	106.73	101.42	---	---	Peak
2483.500	28.47	6.17	39.92	73.98	68.70	74.00	5.30	Peak
2484.500	28.47	6.17	39.92	62.58	57.30	74.00	16.70	Peak

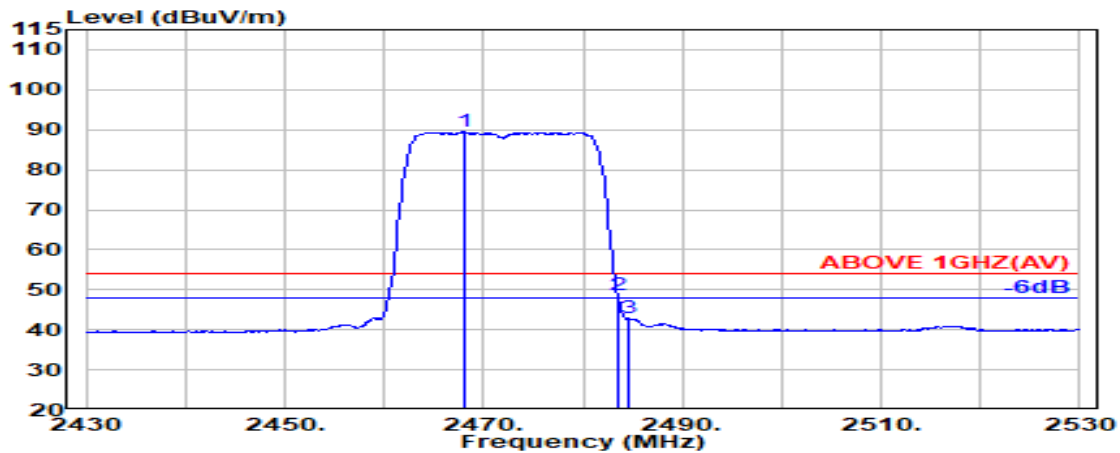


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	6.15	39.92	94.83	89.49	---	---	Average
2483.500	28.47	6.17	39.92	54.02	48.73	54.00	5.27	Average
2484.700	28.47	6.17	39.92	48.07	42.79	54.00	11.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

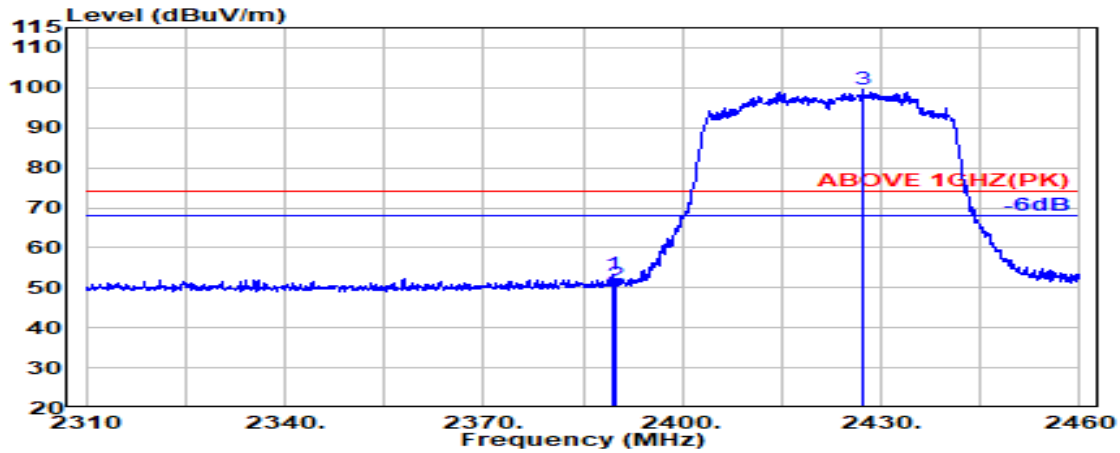

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	58.91	53.22	74.00	20.78	Peak
2390.000	28.20	6.03	39.93	56.36	50.67	74.00	23.33	Peak
@ 2427.200	28.31	6.09	39.93	104.95	99.42	---	---	Peak

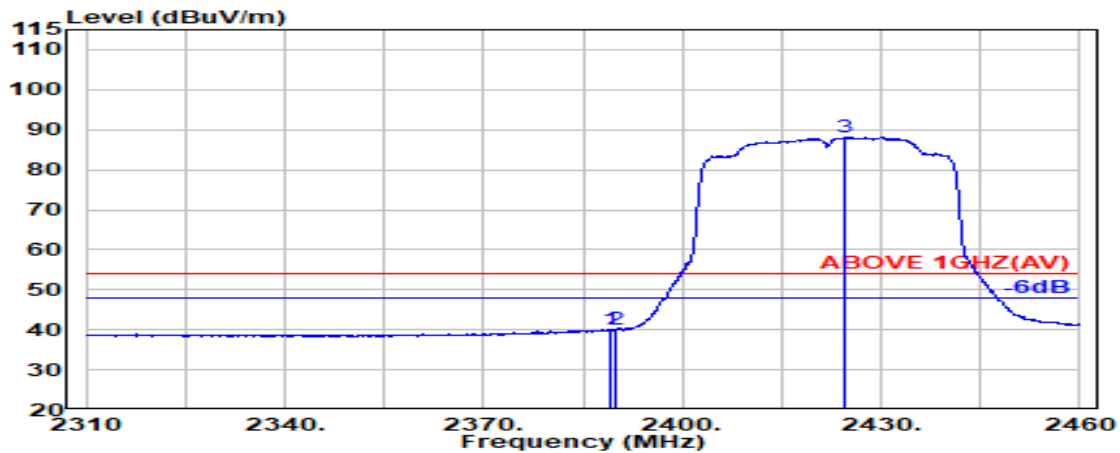


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	6.03	39.93	45.71	40.01	54.00	13.99	Average
2390.000	28.20	6.03	39.93	45.68	39.99	54.00	14.01	Average
@ 2424.400	28.30	6.08	39.93	93.60	88.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

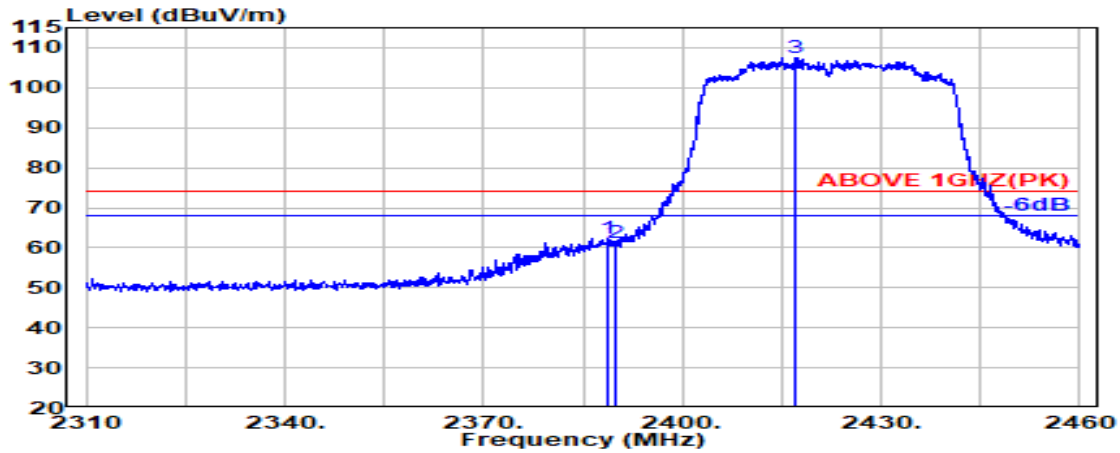

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.20	6.03	39.93	68.15	62.45	74.00	11.55	Peak
2390.000	28.20	6.03	39.93	66.80	61.10	74.00	12.90	Peak
@ 2417.200	28.27	6.07	39.93	113.13	107.54	---	---	Peak

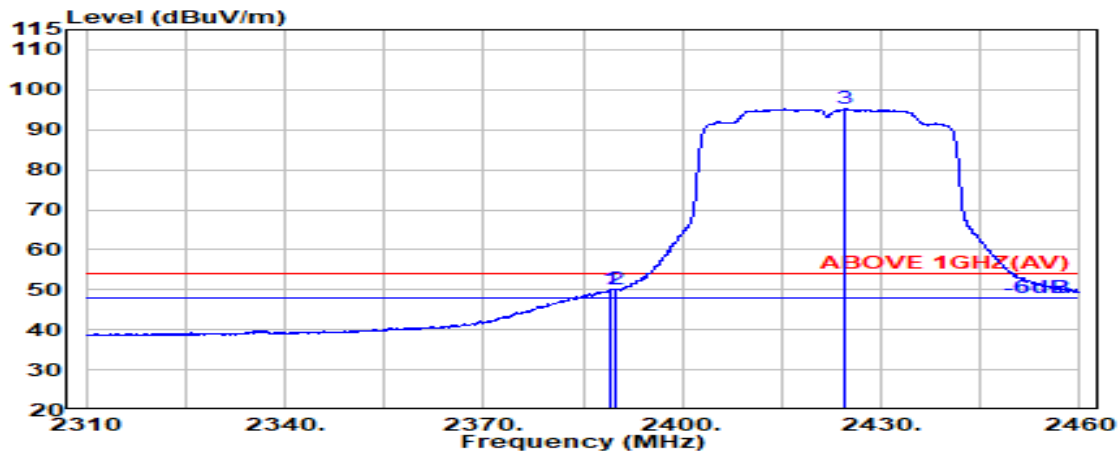


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	6.03	39.93	55.93	50.23	54.00	3.77	Average
2390.000	28.20	6.03	39.93	55.70	50.01	54.00	3.99	Average
@ 2424.600	28.30	6.08	39.93	100.88	95.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

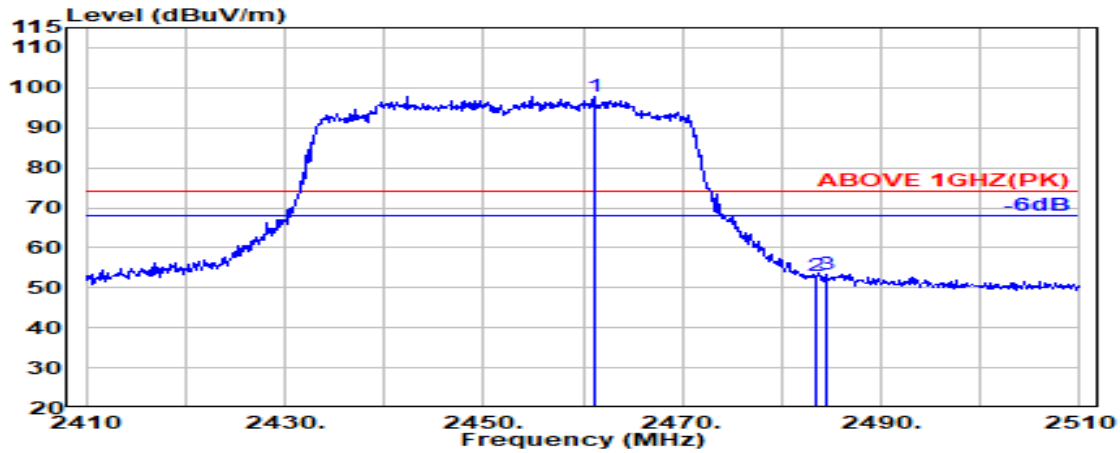

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	39.92	103.30	97.94	---	---	Peak
2483.500	28.47	6.17	39.92	58.11	52.82	74.00	21.18	Peak
2484.400	28.47	6.17	39.92	58.70	53.41	74.00	20.59	Peak

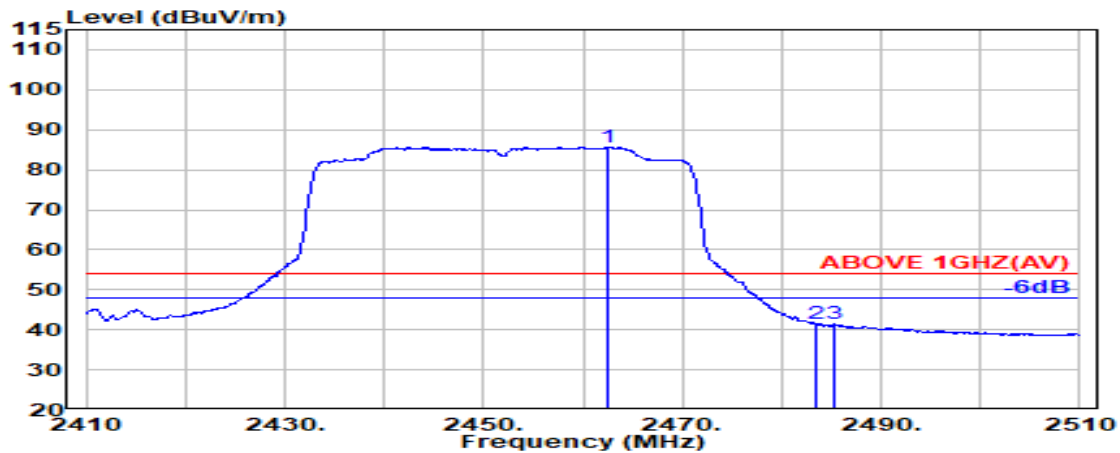


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	28.42	6.14	39.92	91.08	85.72	---	---	Average
2483.500	28.47	6.17	39.92	46.71	41.42	54.00	12.58	Average
2485.300	28.47	6.17	39.92	46.67	41.39	54.00	12.61	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

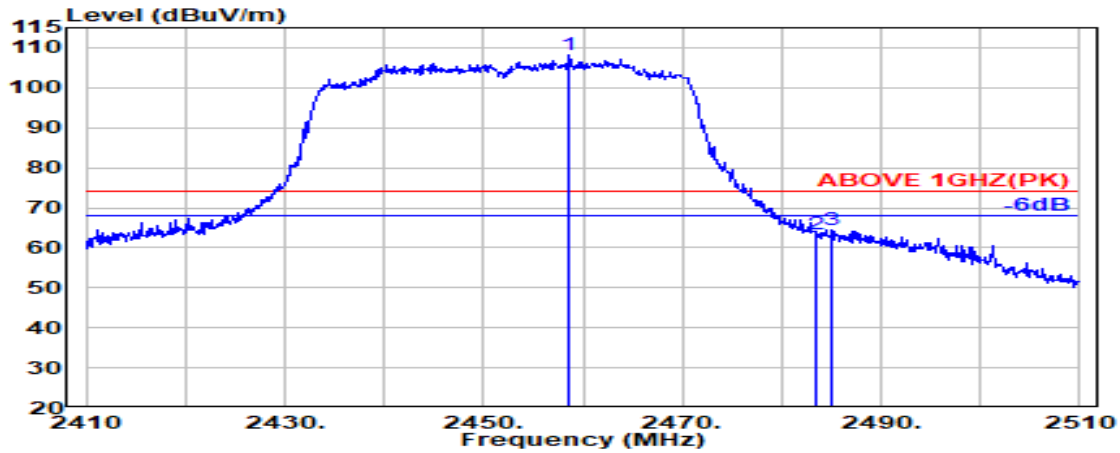

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	28.42	6.13	39.92	113.55	108.17	---	---	Peak
2483.500	28.47	6.17	39.92	68.81	63.53	74.00	10.47	Peak
2485.100	28.47	6.17	39.92	69.91	64.63	74.00	9.37	Peak

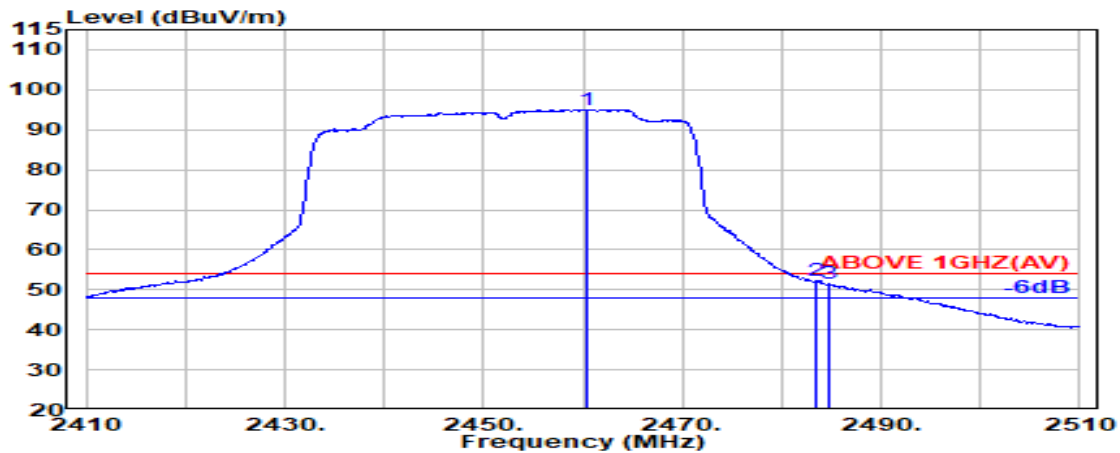


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	28.42	6.14	39.92	100.45	95.08	---	---	Average
2483.500	28.47	6.17	39.92	57.43	52.14	54.00	1.86	Average
2484.700	28.47	6.17	39.92	56.75	51.47	54.00	2.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

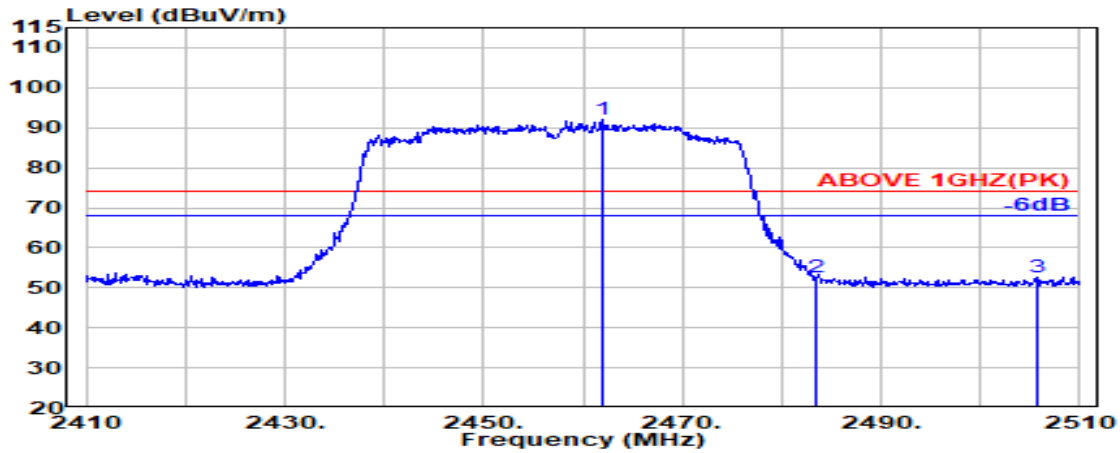

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.42	6.14	39.92	97.48	92.12	---	---	Peak
2483.500	28.47	6.17	39.92	57.98	52.69	74.00	21.31	Peak
2505.600	28.51	6.20	39.92	58.00	52.79	74.00	21.21	Peak

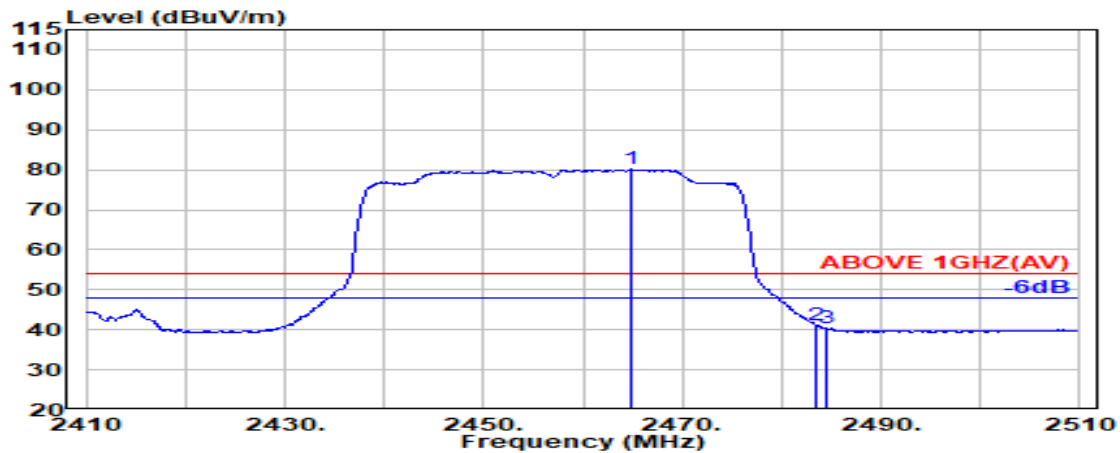


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	39.92	85.43	80.08	---	---	Average
2483.500	28.47	6.17	39.92	46.31	41.02	54.00	12.98	Average
2484.400	28.47	6.17	39.92	45.57	40.29	54.00	13.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

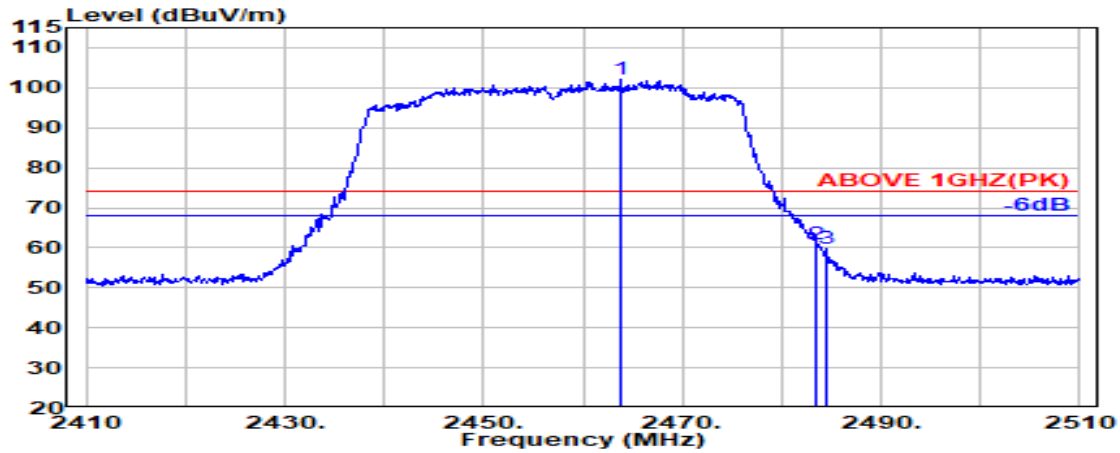

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.43	6.14	39.92	107.62	102.27	---	---	Peak
2483.500	28.47	6.17	39.92	66.23	60.94	74.00	13.06	Peak
2484.600	28.47	6.17	39.92	65.15	59.87	74.00	14.13	Peak

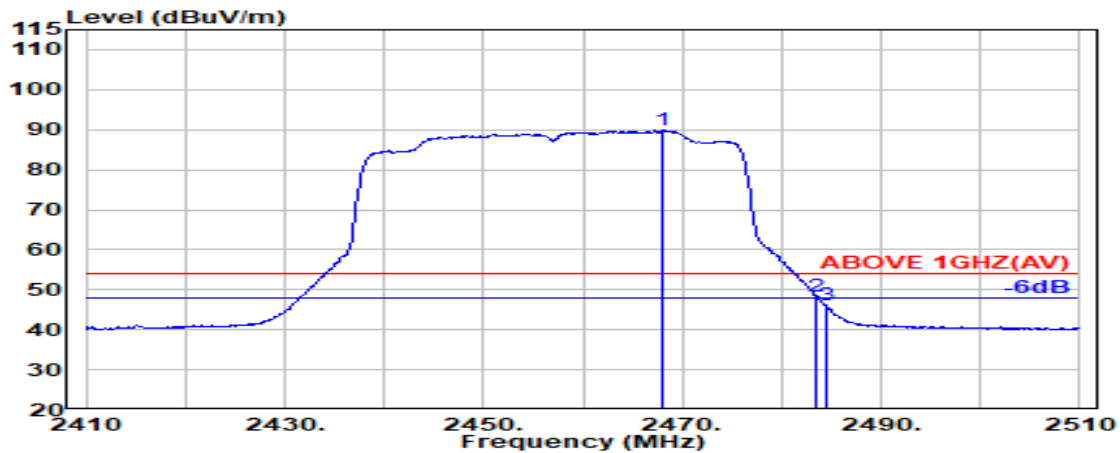


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	6.15	39.92	95.23	89.89	---	---	Average
2483.500	28.47	6.17	39.92	53.67	48.38	54.00	5.62	Average
2484.400	28.47	6.17	39.92	51.50	46.22	54.00	7.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

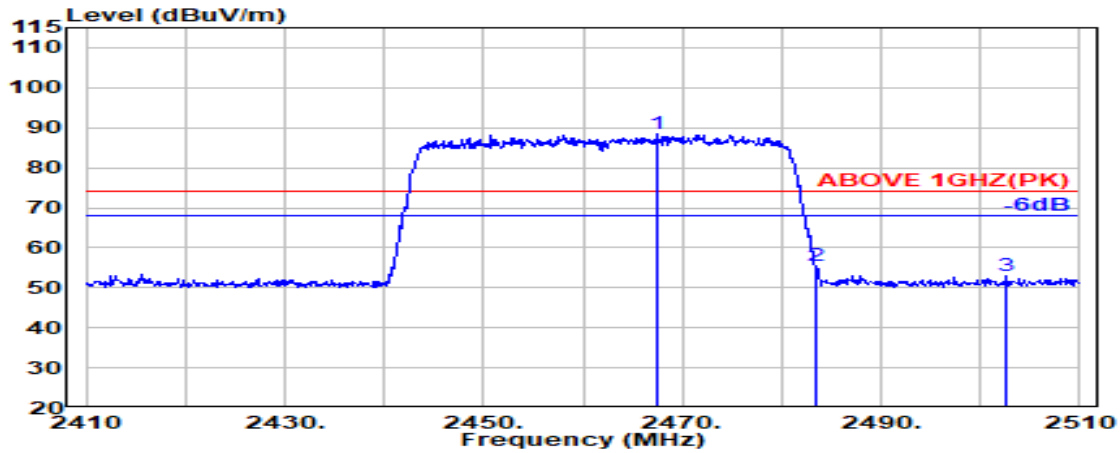

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	28.44	6.14	39.92	93.86	88.51	---	---	Peak
2483.500	28.47	6.17	39.92	60.88	55.59	74.00	18.41	Peak
2502.600	28.51	6.19	39.92	58.23	53.01	74.00	20.99	Peak

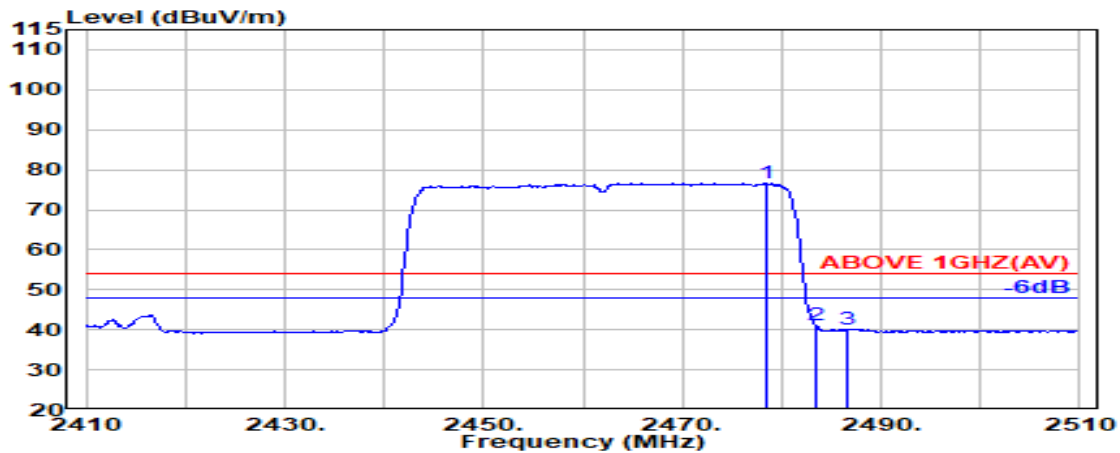


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	6.16	39.92	81.87	76.57	---	---	Average
2483.500	28.47	6.17	39.92	46.33	41.04	54.00	12.96	Average
2486.500	28.47	6.17	39.92	45.45	40.17	54.00	13.83	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

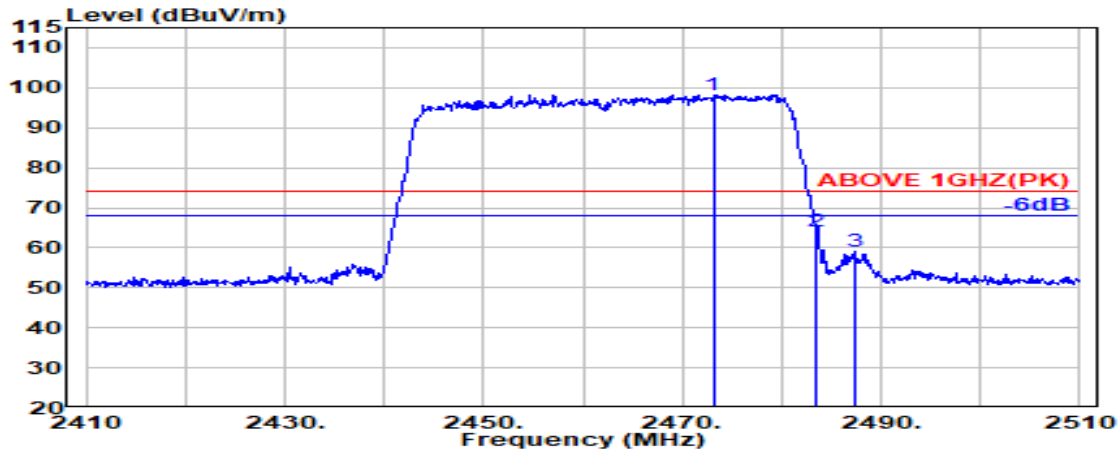

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.100	28.45	6.15	39.92	103.61	98.29	---	---	Peak
2483.500	28.47	6.17	39.92	69.20	63.92	74.00	10.08	Peak
2487.500	28.48	6.17	39.92	64.18	58.91	74.00	15.09	Peak

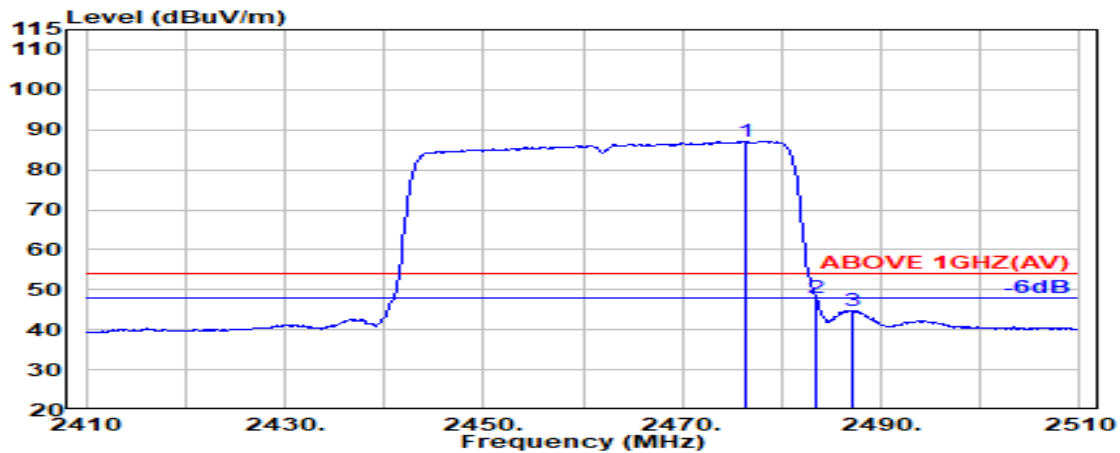


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.45	6.16	39.92	92.37	87.06	---	---	Average
2483.500	28.47	6.17	39.92	53.19	47.91	54.00	6.09	Average
2487.100	28.47	6.17	39.92	50.08	44.80	54.00	9.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

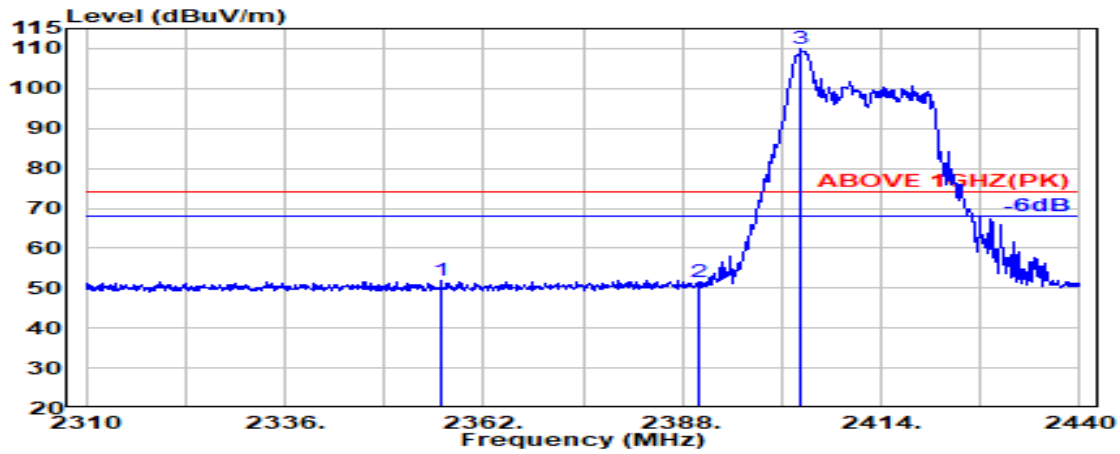

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2356.500	28.20	5.99	39.93	57.71	51.97	74.00	22.03	Peak
2390.000	28.20	6.03	39.93	57.28	51.58	74.00	22.42	Peak
@ 2403.500	28.21	6.05	39.93	115.49	109.83	---	---	Peak

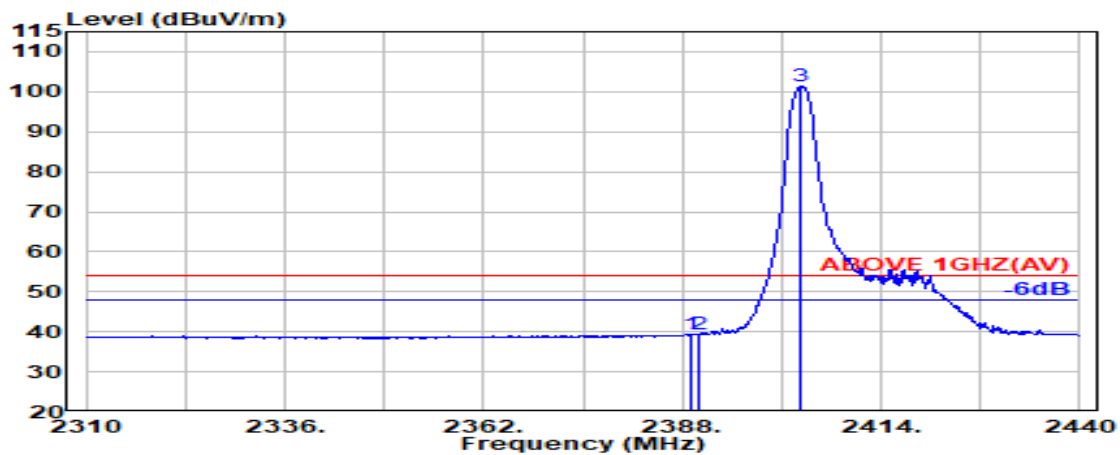


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	45.09	39.40	54.00	14.60	Average
2390.000	28.20	6.03	39.93	44.97	39.28	54.00	14.72	Average
@ 2403.600	28.21	6.05	39.93	107.13	101.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

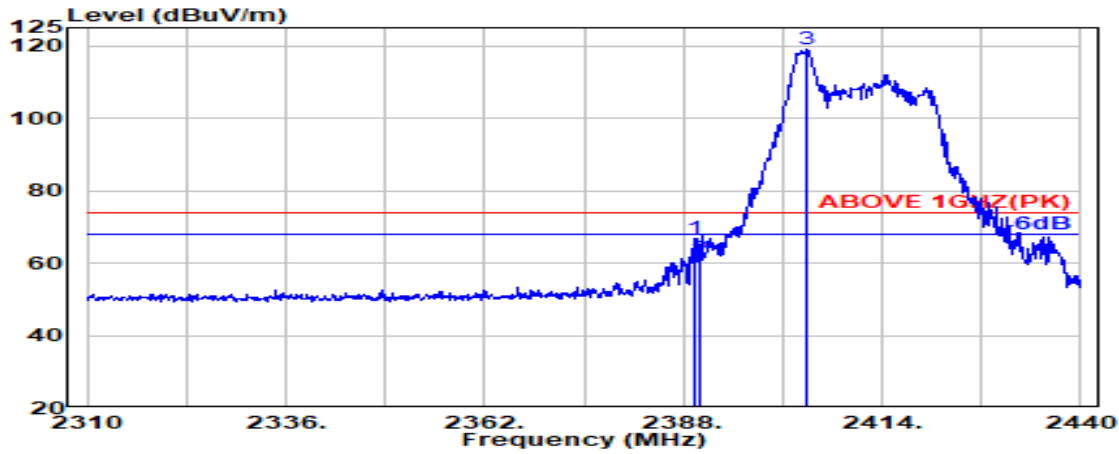

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	72.44	66.75	74.00	7.25	Peak
2390.000	28.20	6.03	39.93	67.04	61.34	74.00	12.66	Peak
@ 2404.100	28.22	6.06	39.93	124.59	118.93	---	---	Peak

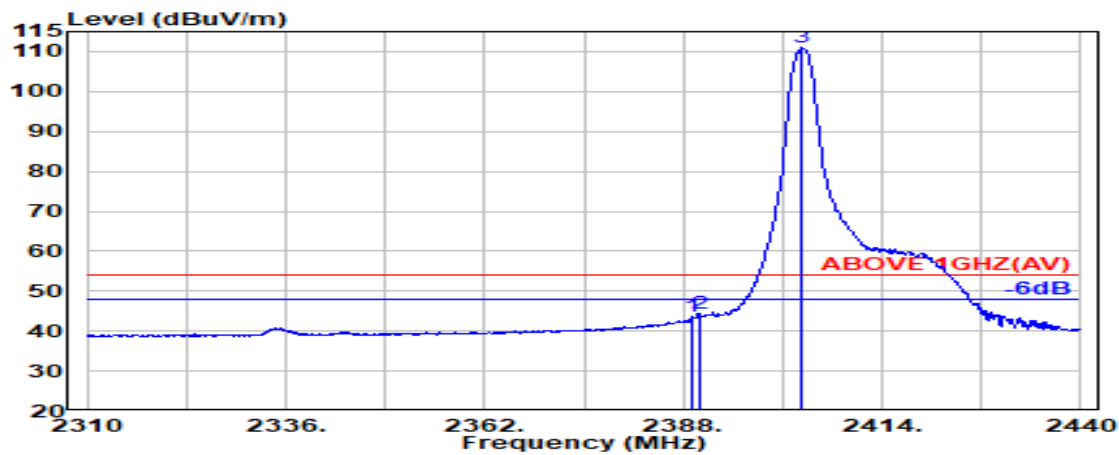


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	6.03	39.93	49.38	43.68	54.00	10.32	Average
2390.000	28.20	6.03	39.93	49.90	44.20	54.00	9.80	Average
@ 2403.600	28.21	6.05	39.93	116.54	110.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

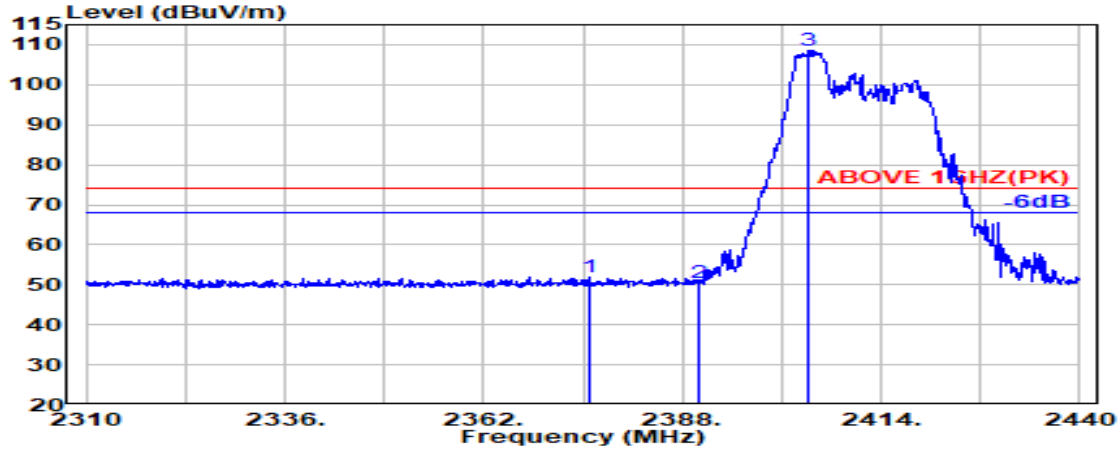

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.700	28.20	6.01	39.93	57.61	51.90	74.00	22.10	Peak
2390.000	28.20	6.03	39.93	56.10	50.41	74.00	23.59	Peak
@ 2404.500	28.22	6.06	39.93	114.32	108.67	---	---	Peak

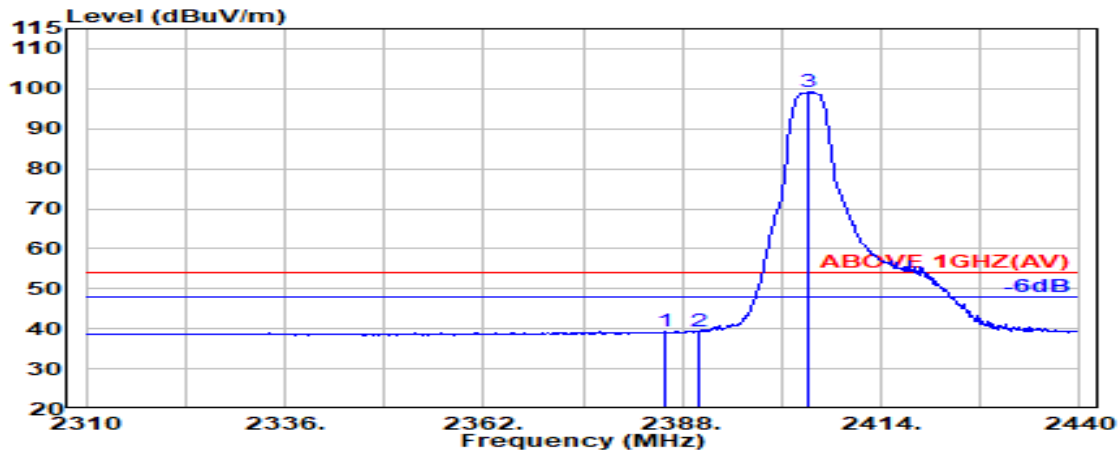


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.700	28.20	6.03	39.93	45.16	39.46	54.00	14.54	Average
2390.000	28.20	6.03	39.93	44.99	39.30	54.00	14.70	Average
@ 2404.600	28.22	6.06	39.93	104.89	99.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

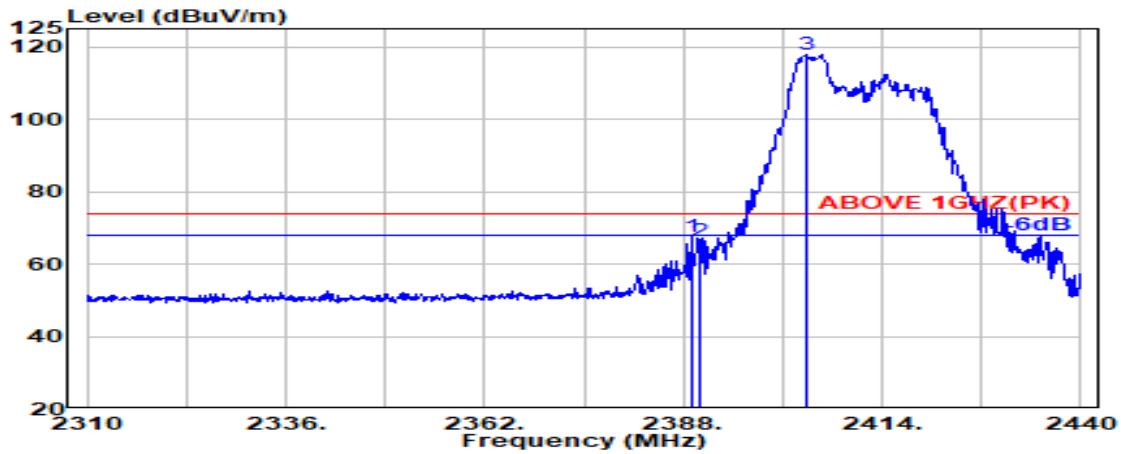

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	6.03	39.93	73.12	67.43	74.00	6.57	Peak
2390.000	28.20	6.03	39.93	71.86	66.17	74.00	7.83	Peak
@ 2404.200	28.22	6.06	39.93	123.51	117.86	---	---	Peak

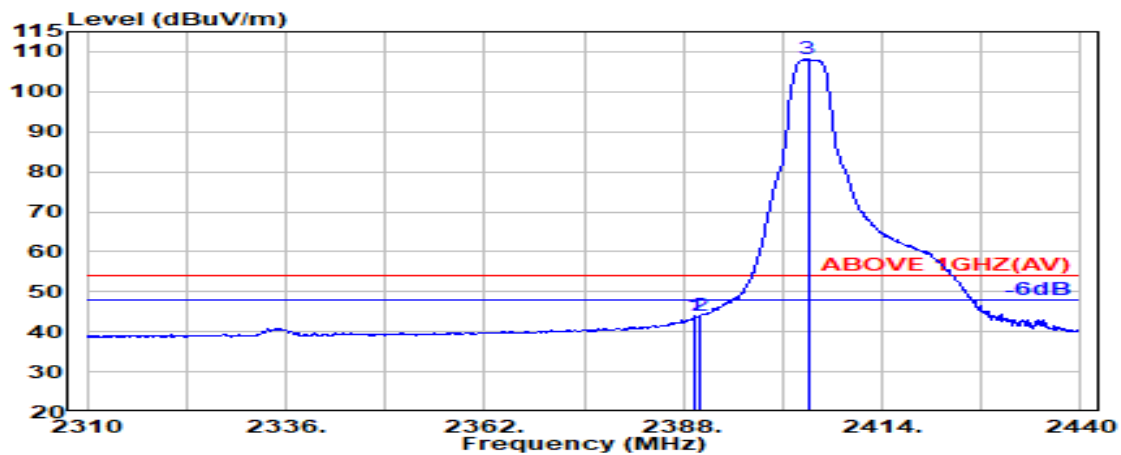


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	49.62	43.93	54.00	10.07	Average
2390.000	28.20	6.03	39.93	49.63	43.94	54.00	10.06	Average
@ 2404.300	28.22	6.06	39.93	113.85	108.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

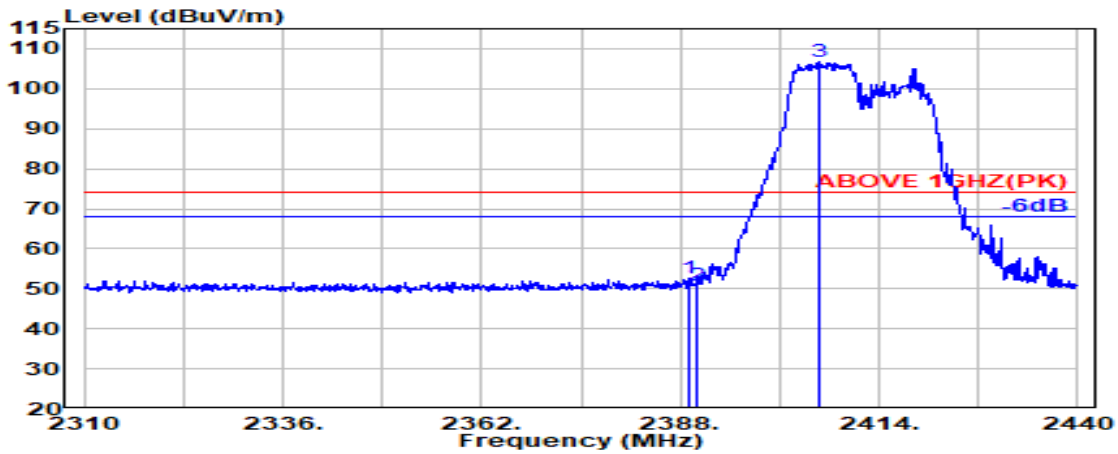

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	6.03	39.93	58.21	52.51	74.00	21.49	Peak
2390.000	28.20	6.03	39.93	56.34	50.65	74.00	23.35	Peak
@ 2406.100	28.22	6.06	39.93	112.37	106.72	---	---	Peak

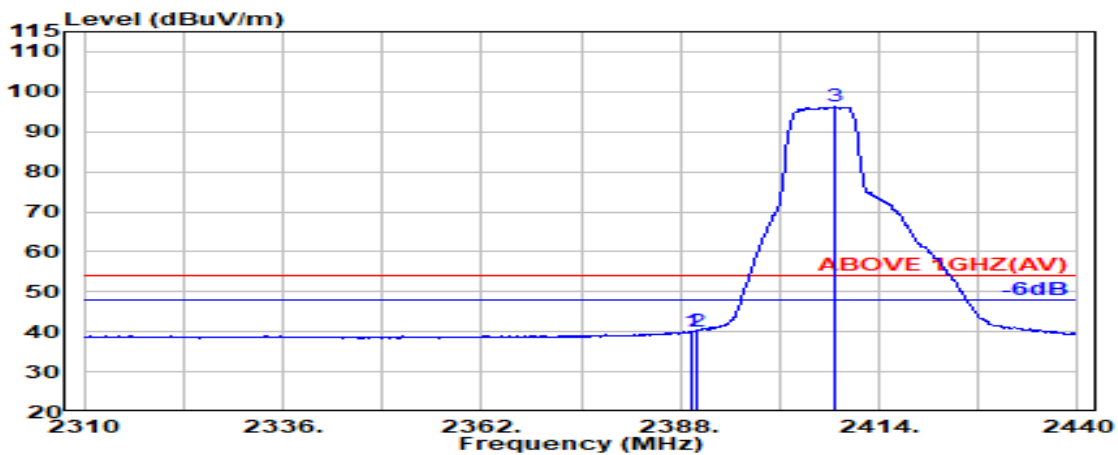


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	45.75	40.06	54.00	13.94	Average
2390.000	28.20	6.03	39.93	45.84	40.15	54.00	13.85	Average
@ 2408.100	28.23	6.06	39.93	101.84	96.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

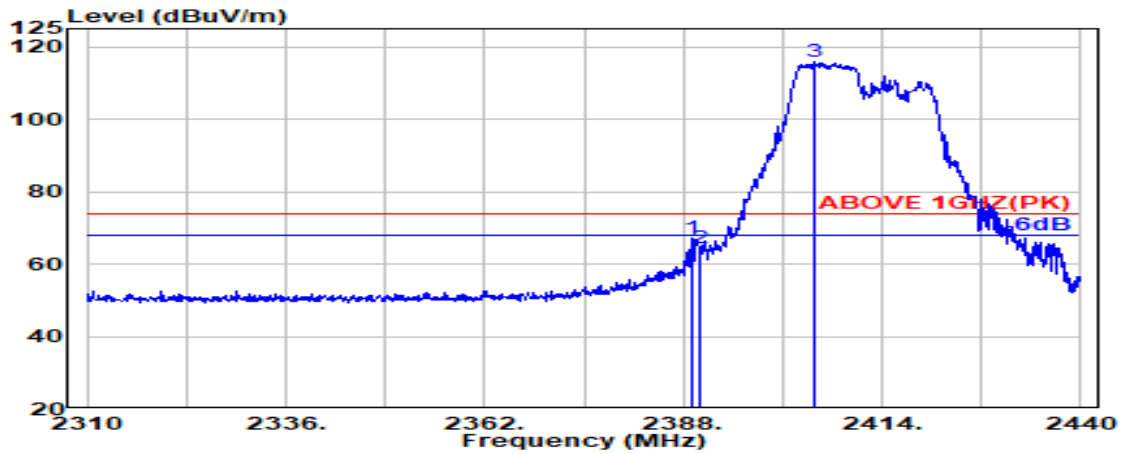

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	6.03	39.93	72.77	67.08	74.00	6.92	Peak
2390.000	28.20	6.03	39.93	69.92	64.23	74.00	9.77	Peak
@ 2405.200	28.22	6.06	39.93	121.67	116.02	---	---	Peak

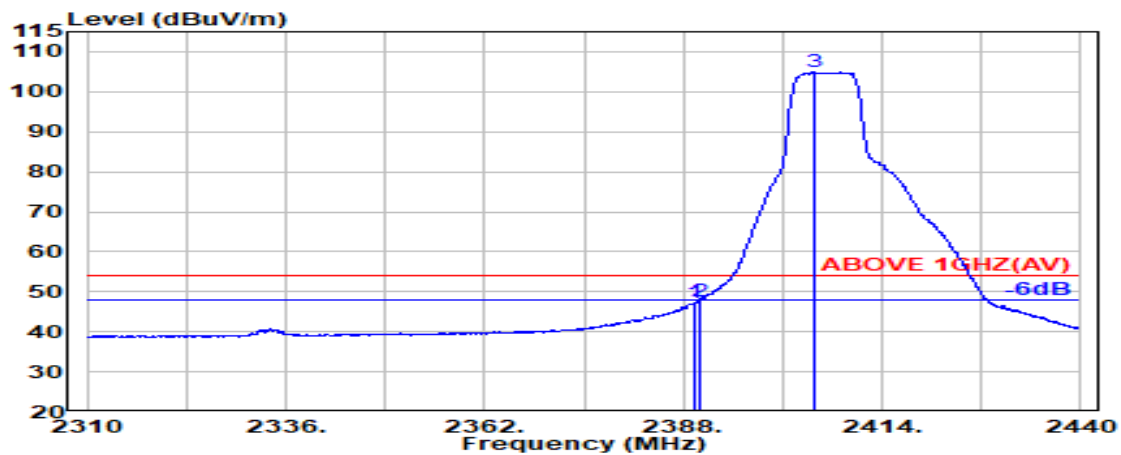


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	52.92	47.23	54.00	6.77	Average
2390.000	28.20	6.03	39.93	53.21	47.52	54.00	6.48	Average
@ 2405.000	28.22	6.06	39.93	110.50	104.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

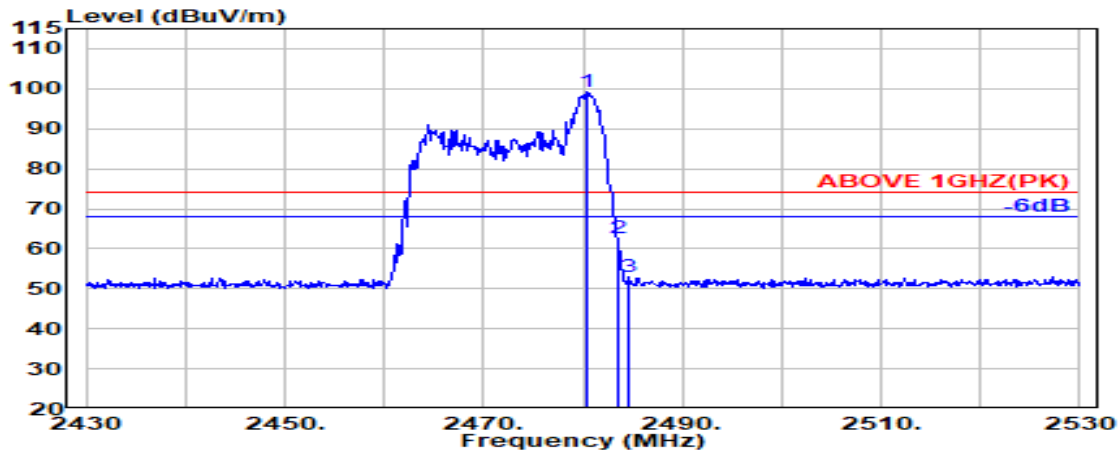

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	39.92	104.61	99.32	---	---	Peak
2483.500	28.47	6.17	39.92	67.89	62.60	74.00	11.40	Peak
2484.500	28.47	6.17	39.92	58.21	52.92	74.00	21.08	Peak

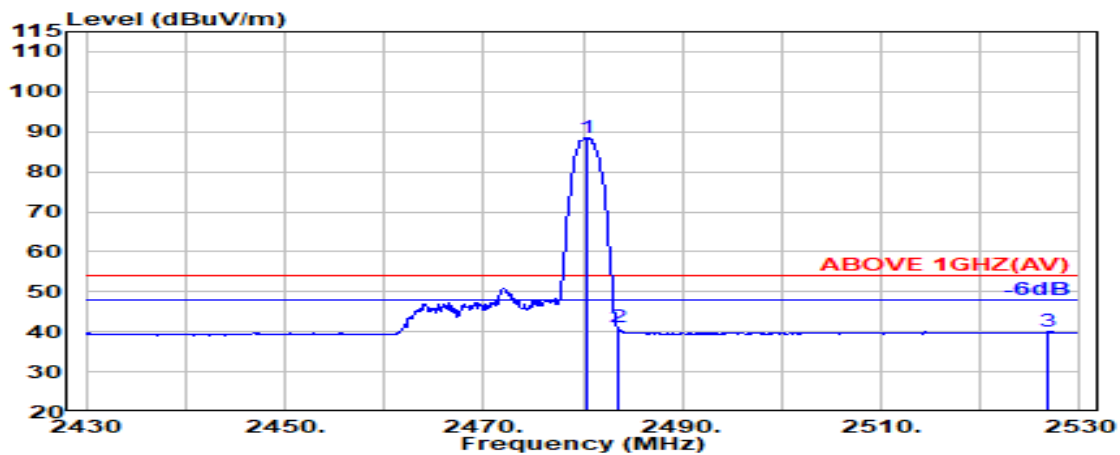


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	93.74	88.45	---	---	Average
2483.500	28.47	6.17	39.92	46.57	41.28	54.00	12.72	Average
2526.800	28.55	6.22	39.92	45.10	39.95	54.00	14.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

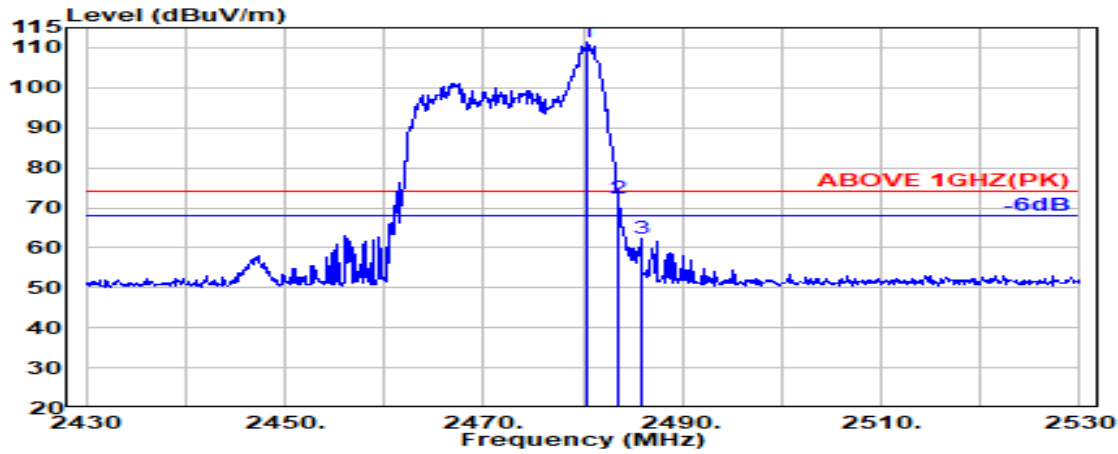

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	116.56	111.26	---	---	Peak
2483.500	28.47	6.17	39.92	77.78	72.49	74.00	1.51	Peak
2485.800	28.47	6.17	39.92	67.48	62.20	74.00	11.80	Peak

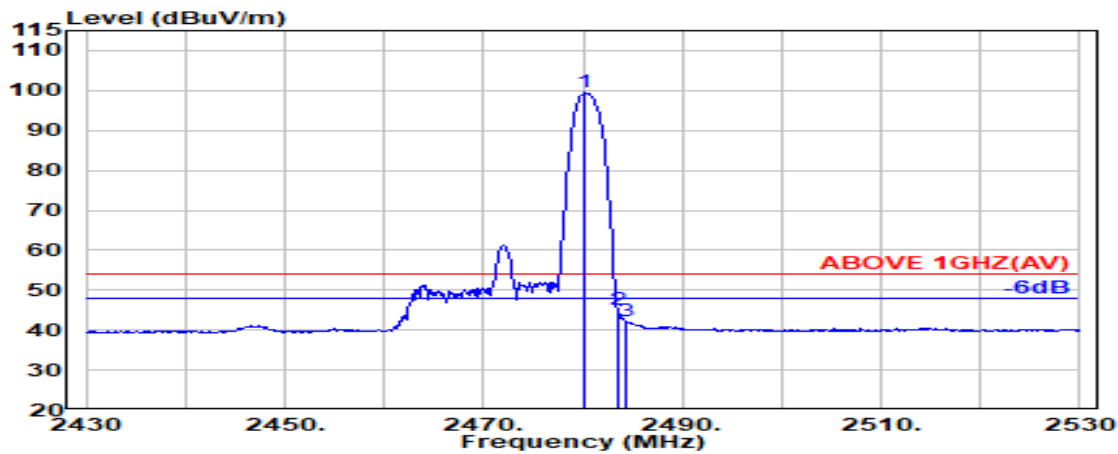


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	39.92	104.77	99.47	---	---	Average
2483.500	28.47	6.17	39.92	50.25	44.96	54.00	9.04	Average
2484.400	28.47	6.17	39.92	47.45	42.17	54.00	11.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

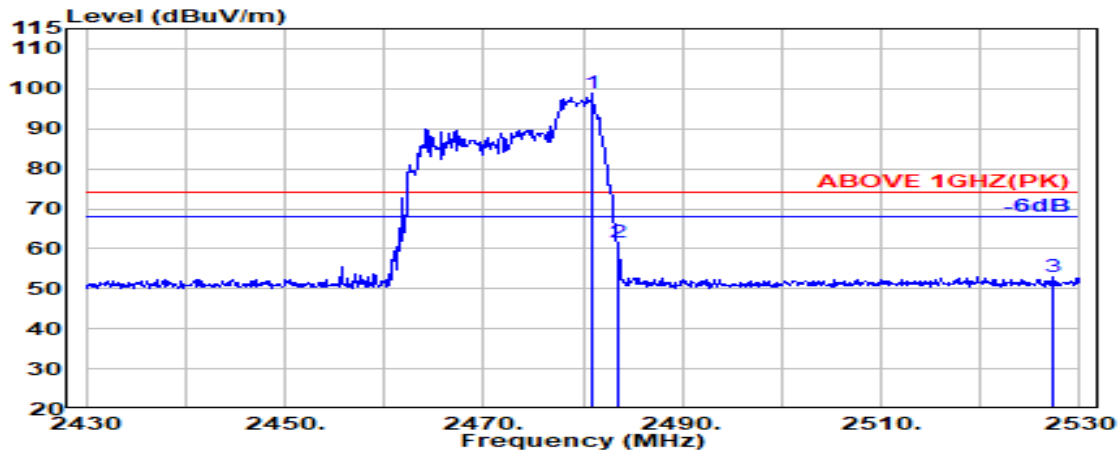

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	28.46	6.16	39.92	104.00	98.70	---	---	Peak
2483.500	28.47	6.17	39.92	66.88	61.59	74.00	12.41	Peak
2527.400	28.56	6.22	39.92	58.15	53.00	74.00	21.00	Peak

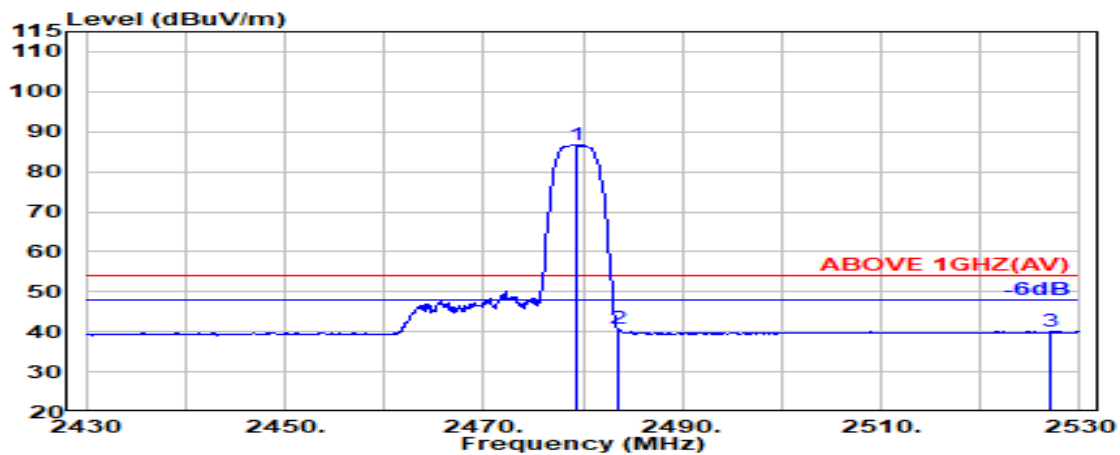


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.46	6.16	39.92	92.08	86.78	---	---	Average
2483.500	28.47	6.17	39.92	46.14	40.85	54.00	13.15	Average
2527.100	28.55	6.22	39.92	45.23	40.08	54.00	13.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

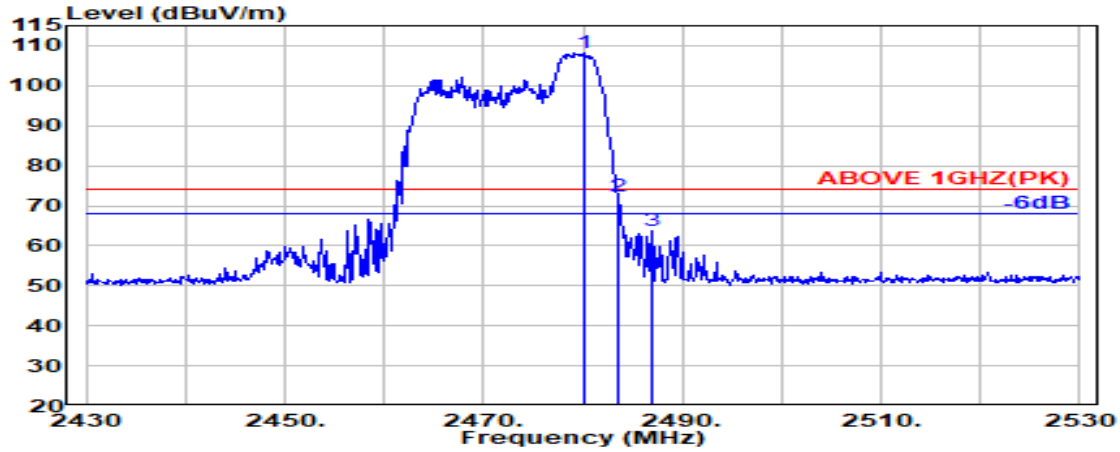

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	39.92	113.48	108.19	---	---	Peak
2483.500	28.47	6.17	39.92	77.70	72.41	74.00	1.59	Peak
2486.900	28.47	6.17	39.92	68.85	63.57	74.00	10.43	Peak

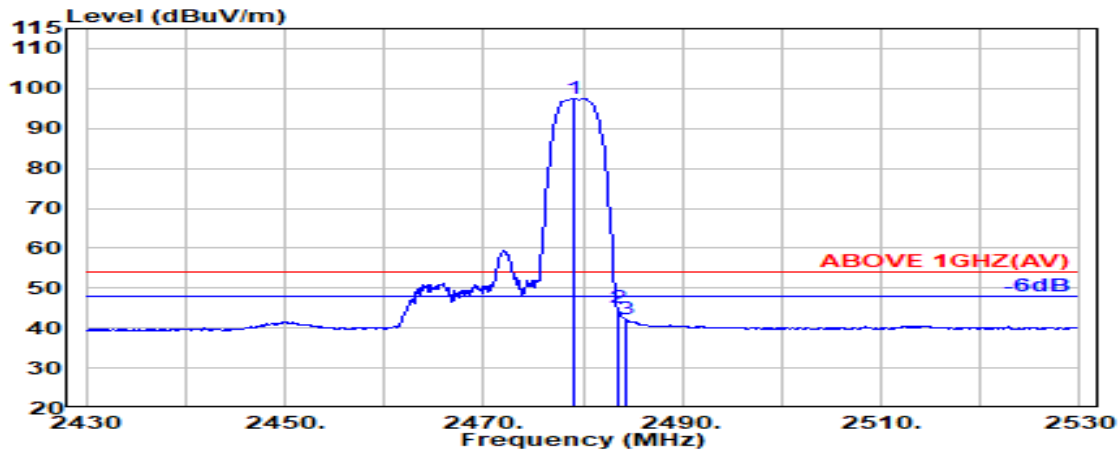


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	6.16	39.92	102.85	97.55	---	---	Average
2483.500	28.47	6.17	39.92	50.41	45.12	54.00	8.88	Average
2484.400	28.47	6.17	39.92	47.67	42.39	54.00	11.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

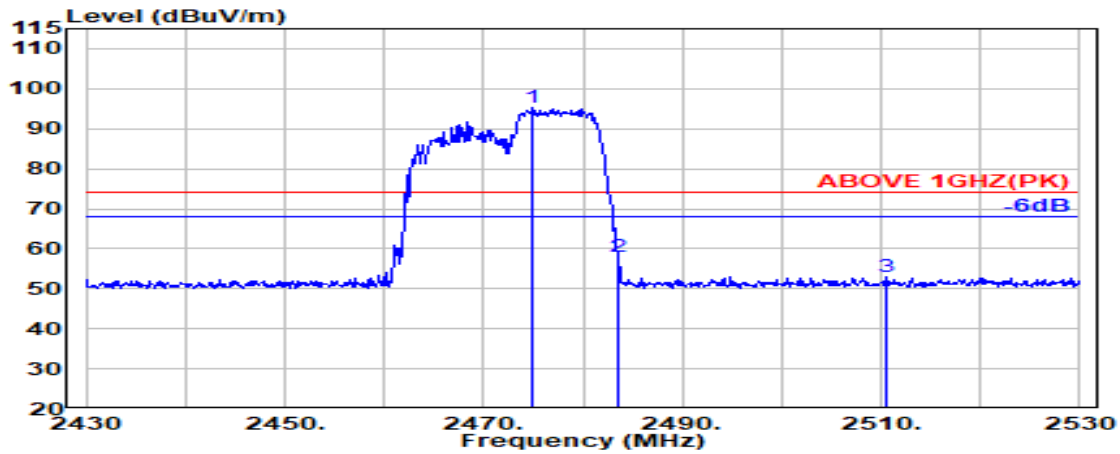

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	28.45	6.16	39.92	100.46	95.14	---	---	Peak
2483.500	28.47	6.17	39.92	63.43	58.14	74.00	15.86	Peak
2510.400	28.52	6.20	39.92	58.27	53.07	74.00	20.93	Peak

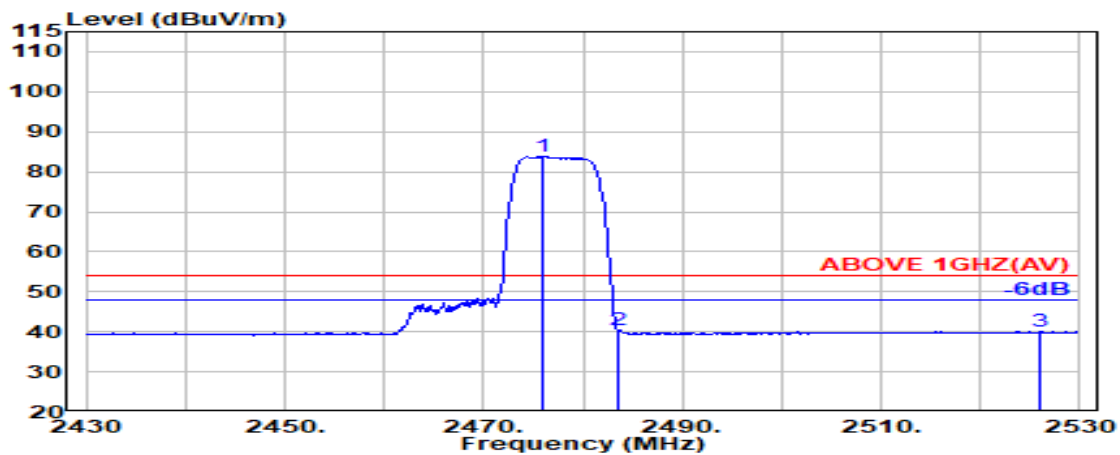


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.45	6.16	39.92	89.27	83.96	---	---	Average
2483.500	28.47	6.17	39.92	45.90	40.61	54.00	13.39	Average
2526.100	28.55	6.22	39.92	45.12	39.97	54.00	14.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

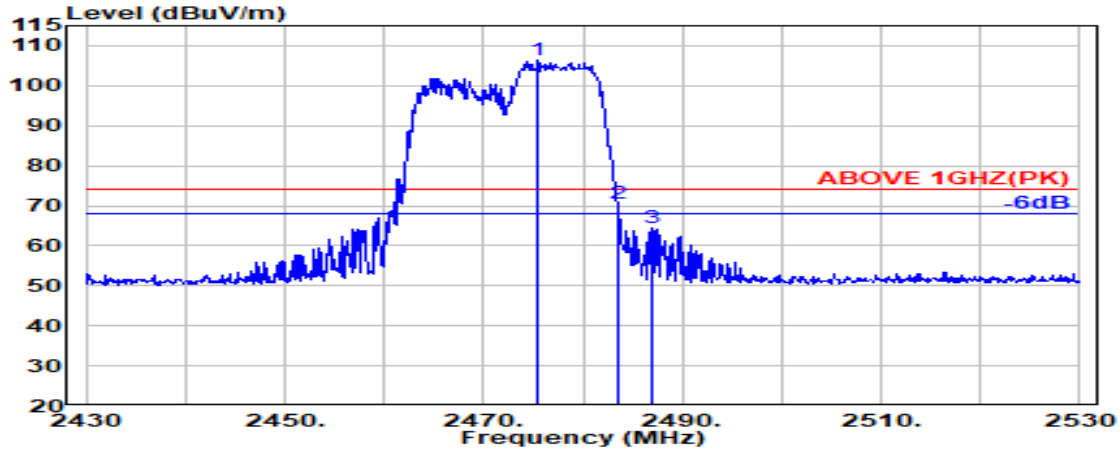

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.45	6.16	39.92	111.59	106.28	---	---	Peak
2483.500	28.47	6.17	39.92	75.88	70.59	74.00	3.41	Peak
2486.900	28.47	6.17	39.92	69.78	64.50	74.00	9.50	Peak

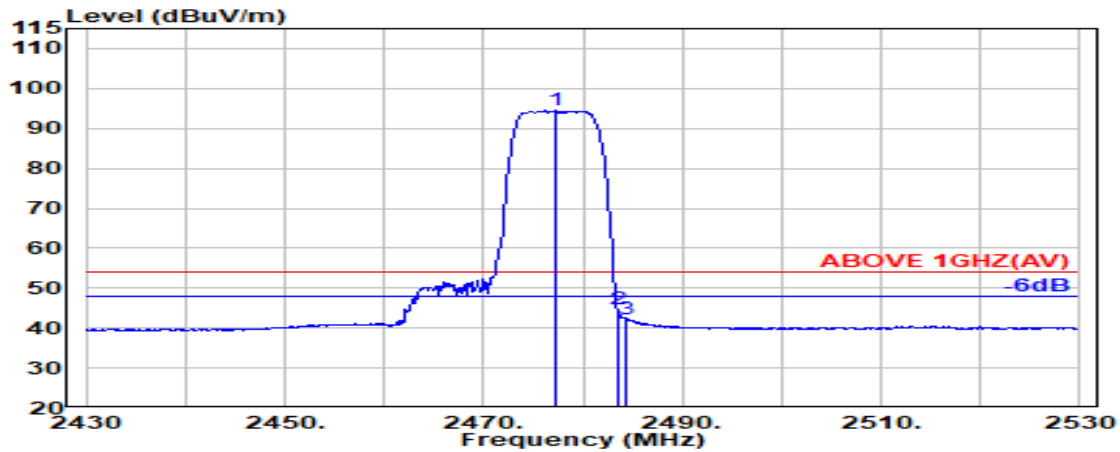


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.300	28.45	6.16	39.92	99.72	94.41	---	---	Average
2483.500	28.47	6.17	39.92	49.87	44.59	54.00	9.41	Average
2484.400	28.47	6.17	39.92	47.49	42.21	54.00	11.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

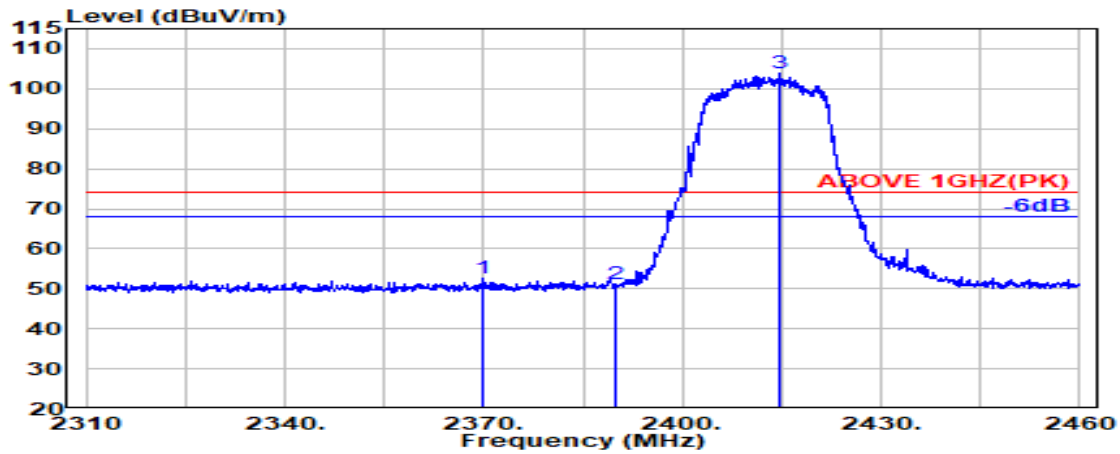

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.000	28.20	6.01	39.93	58.25	52.53	74.00	21.47	Peak
2390.000	28.20	6.03	39.93	56.71	51.02	74.00	22.98	Peak
@ 2414.500	28.26	6.07	39.93	109.56	103.96	---	---	Peak

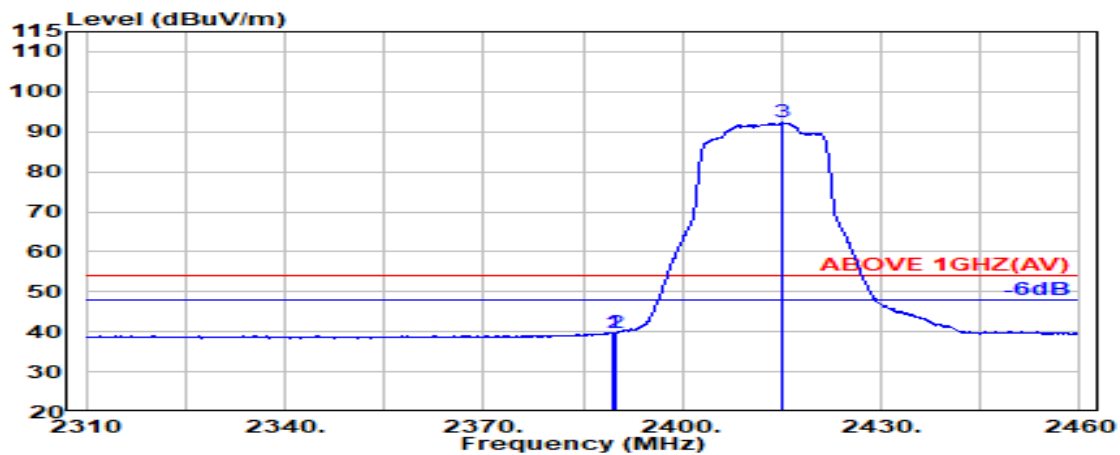


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	45.57	39.88	54.00	14.12	Average
2390.000	28.20	6.03	39.93	45.38	39.69	54.00	14.31	Average
@ 2415.200	28.26	6.07	39.93	97.84	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

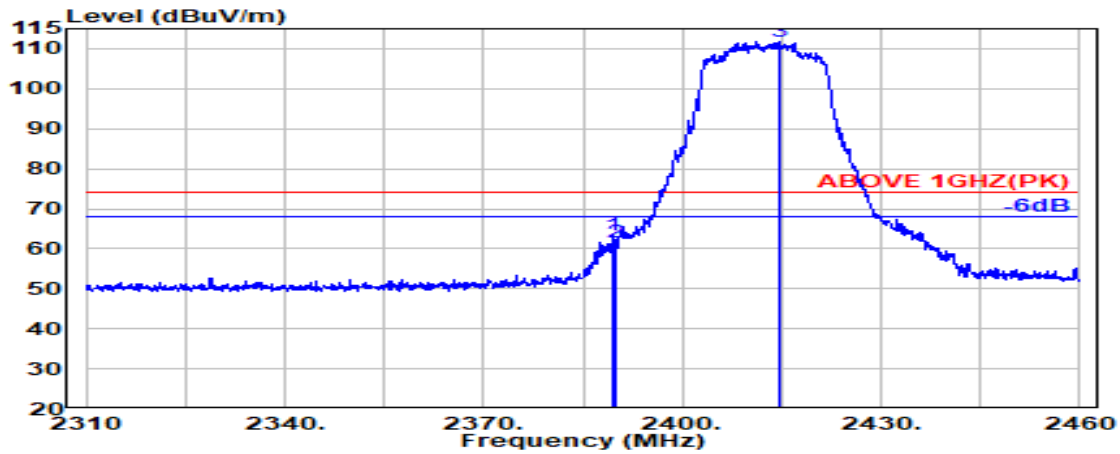

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	69.13	63.43	74.00	10.57	Peak
2390.000	28.20	6.03	39.93	67.11	61.41	74.00	12.59	Peak
@ 2414.600	28.26	6.07	39.93	117.40	111.80	---	---	Peak

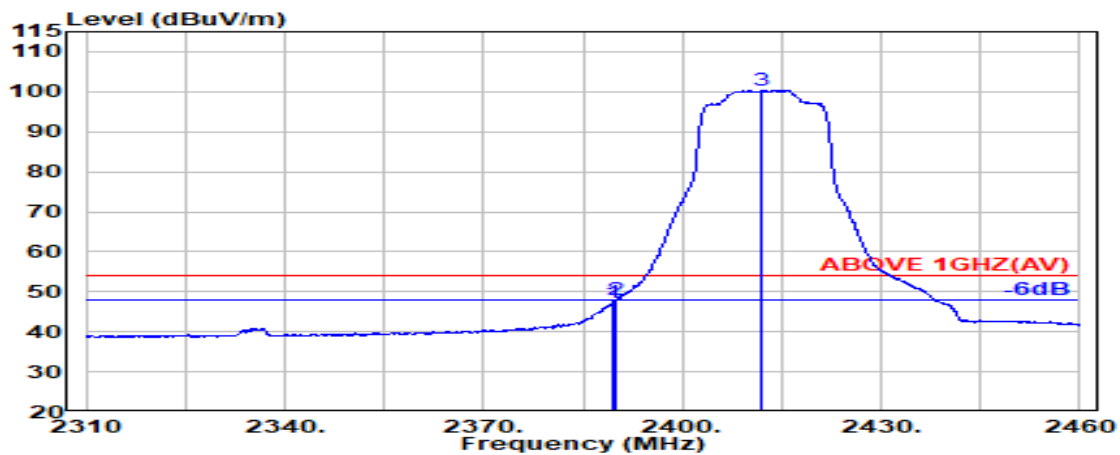


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	52.93	47.24	54.00	6.76	Average
2390.000	28.20	6.03	39.93	53.67	47.98	54.00	6.02	Average
@ 2412.100	28.25	6.07	39.93	106.00	100.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

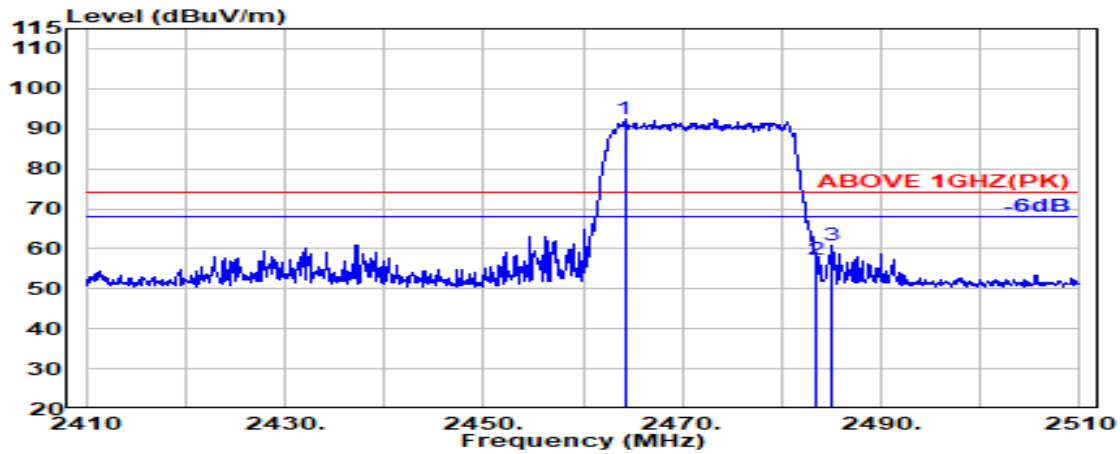

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	39.92	97.73	92.38	---	---	Peak
2483.500	28.47	6.17	39.92	62.47	57.18	74.00	16.82	Peak
2485.100	28.47	6.17	39.92	66.24	60.96	74.00	13.04	Peak

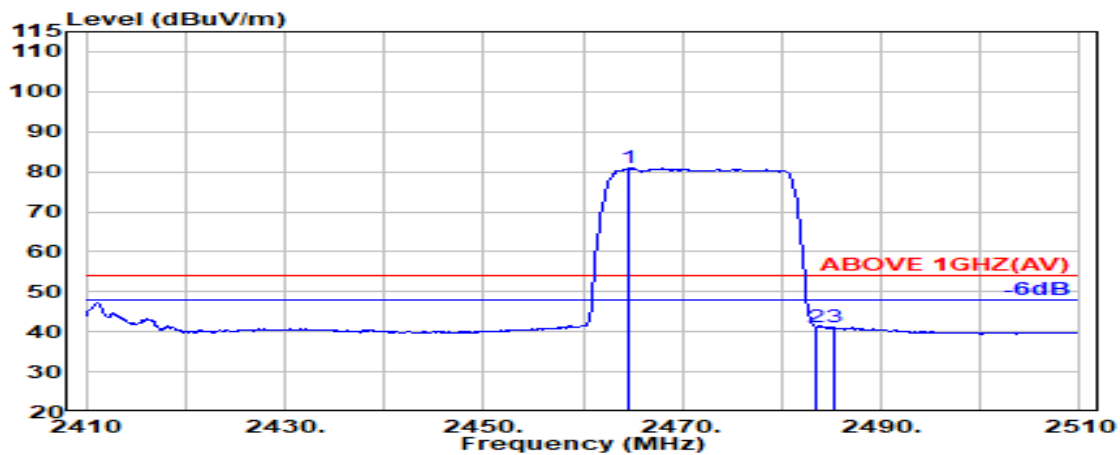


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	39.92	86.23	80.88	---	---	Average
2483.500	28.47	6.17	39.92	46.49	41.20	54.00	12.80	Average
2485.300	28.47	6.17	39.92	46.48	41.20	54.00	12.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

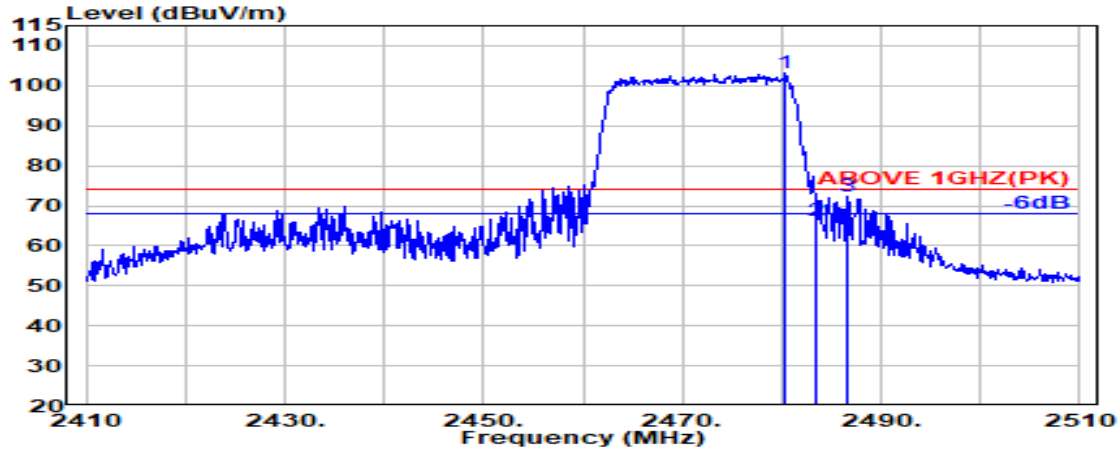

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	39.92	108.62	103.32	---	---	Peak
2483.500	28.47	6.17	39.92	71.42	66.14	74.00	7.86	Peak
2486.700	28.47	6.17	39.92	77.50	72.22	74.00	1.78	Peak

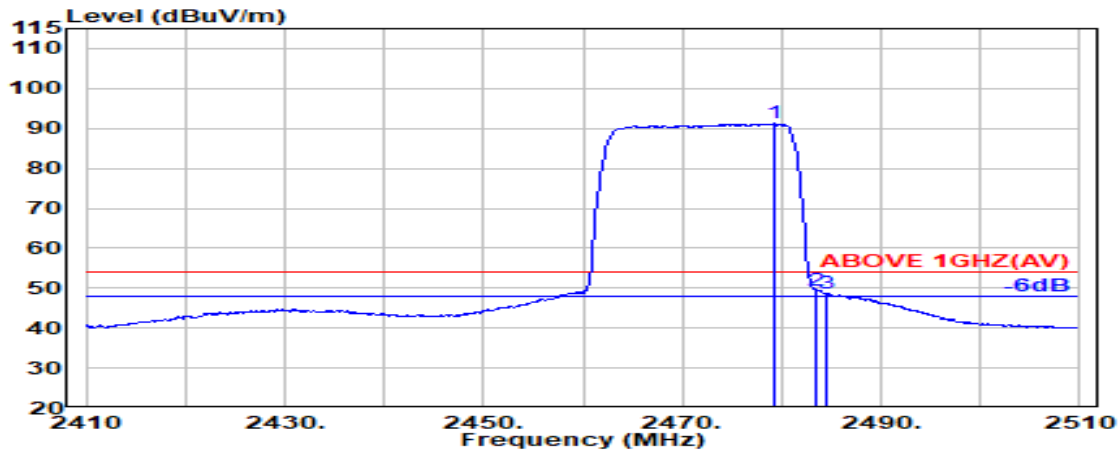


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	6.16	39.92	96.51	91.21	---	---	Average
2483.500	28.47	6.17	39.92	54.55	49.26	54.00	4.74	Average
2484.500	28.47	6.17	39.92	54.10	48.82	54.00	5.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

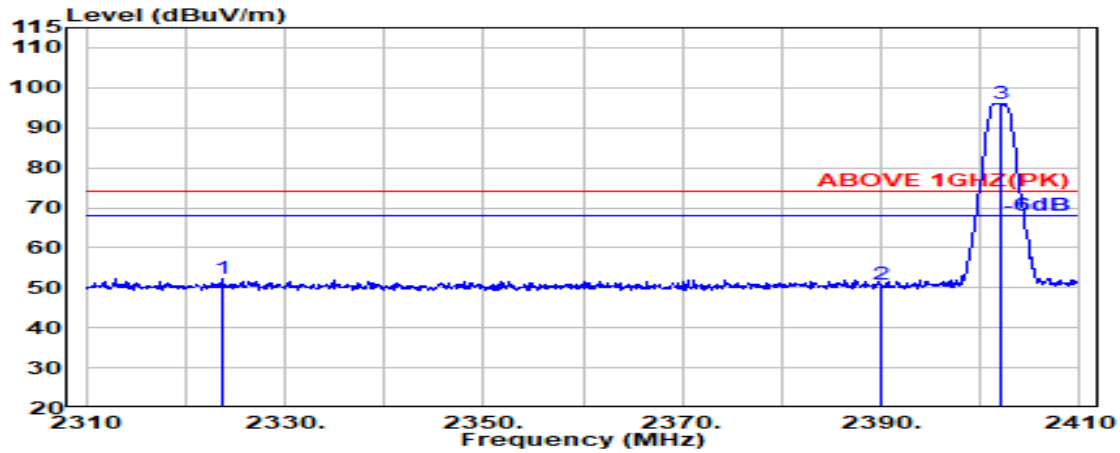

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2323.600	27.94	5.94	39.93	58.30	52.24	74.00	21.76	Peak
2390.000	28.20	6.03	39.93	56.44	50.75	74.00	23.25	Peak
@ 2402.000	28.21	6.05	39.93	101.81	96.14	---	---	Peak

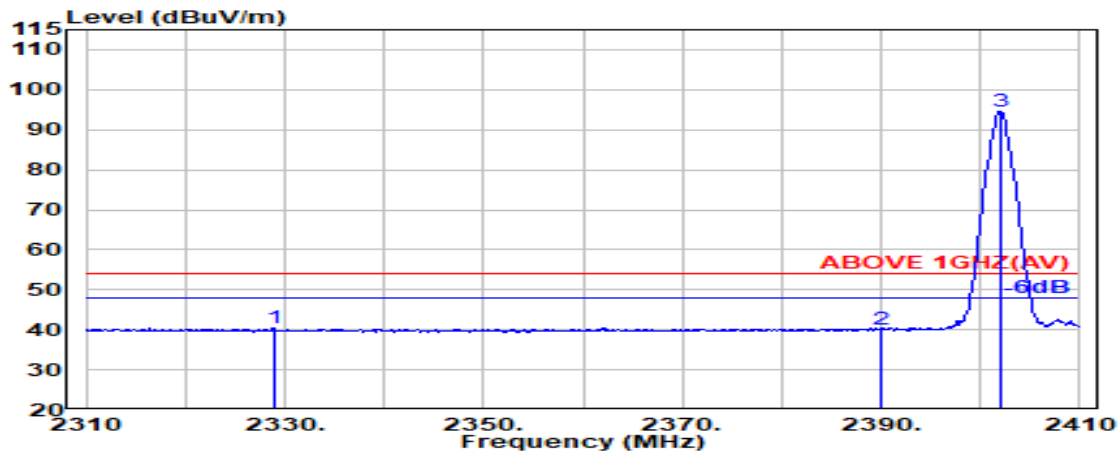


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.900	27.99	5.95	39.93	46.60	40.61	54.00	13.39	Average
2390.000	28.20	6.03	39.93	45.64	39.94	54.00	14.06	Average
@ 2402.000	28.21	6.05	39.93	100.23	94.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

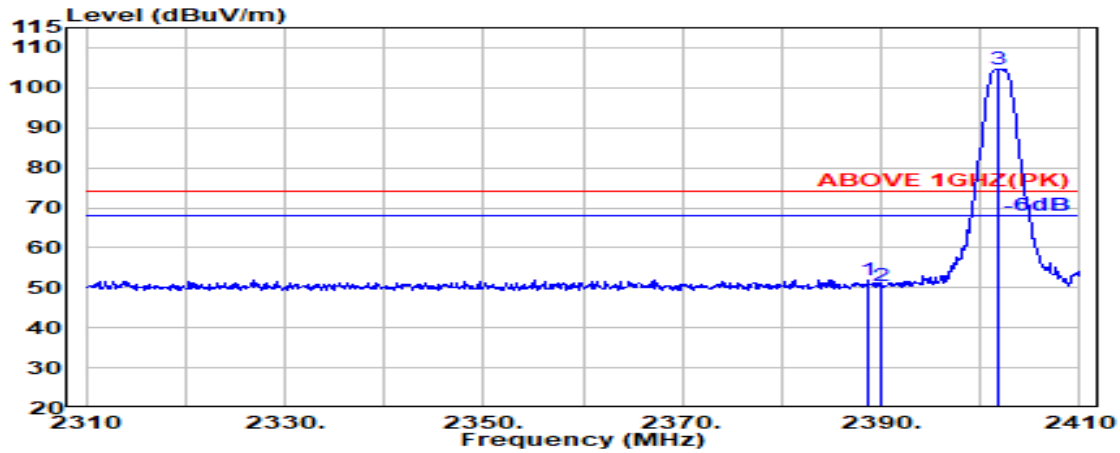

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	6.03	39.93	57.76	52.07	74.00	21.93	Peak
2390.000	28.20	6.03	39.93	56.20	50.51	74.00	23.49	Peak
@ 2401.900	28.21	6.05	39.93	110.25	104.58	---	---	Peak

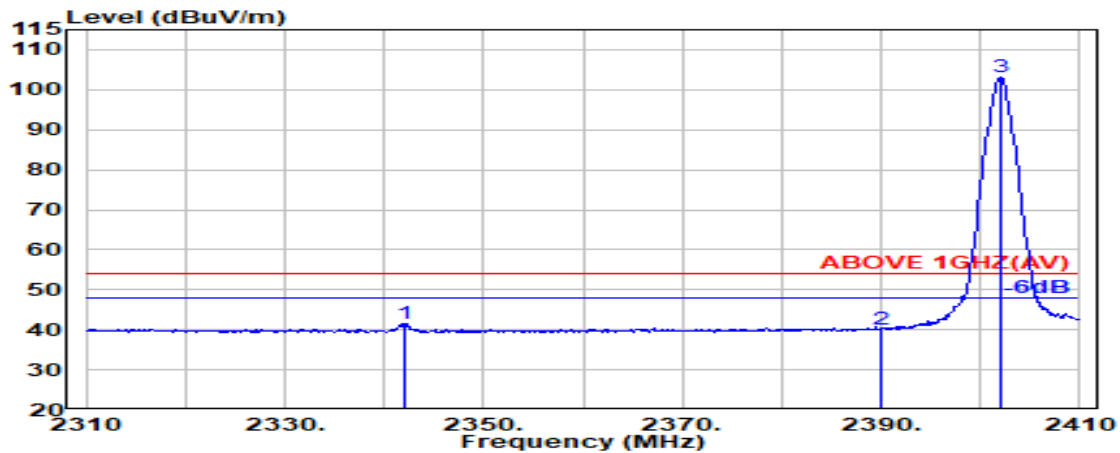


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.12	5.96	39.93	47.49	41.64	54.00	12.36	Average
2390.000	28.20	6.03	39.93	45.70	40.01	54.00	13.99	Average
@ 2402.000	28.21	6.05	39.93	108.68	103.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

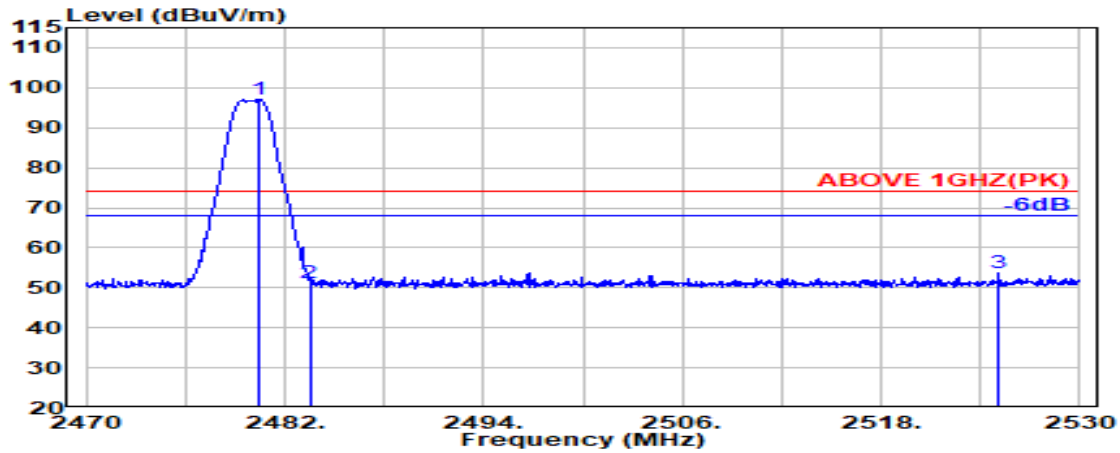

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	102.30	97.01	---	---	Peak
2483.500	28.47	6.17	39.92	56.45	51.17	74.00	22.83	Peak
2525.050	28.55	6.22	39.92	58.78	53.62	74.00	20.38	Peak

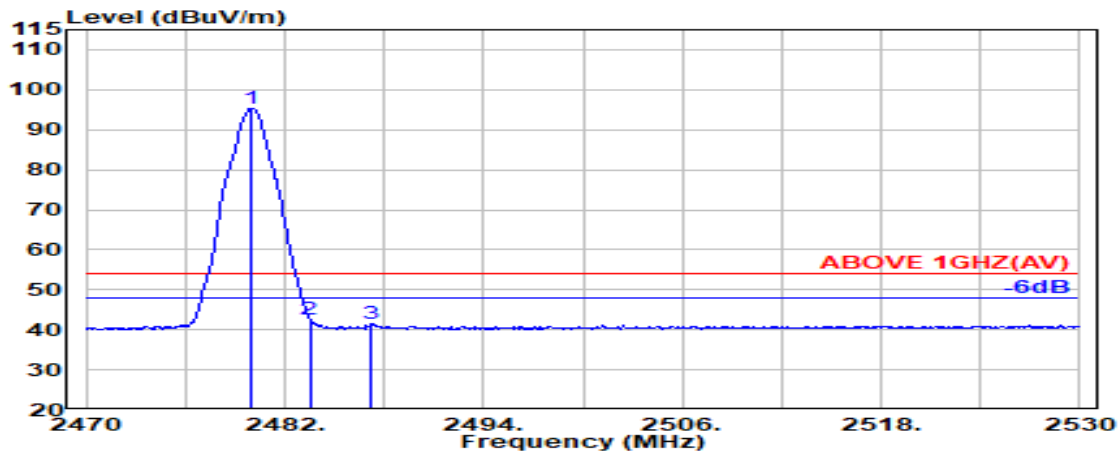


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	39.92	100.66	95.36	---	---	Average
2483.500	28.47	6.17	39.92	47.94	42.65	54.00	11.35	Average
2487.250	28.47	6.17	39.92	46.94	41.67	54.00	12.33	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

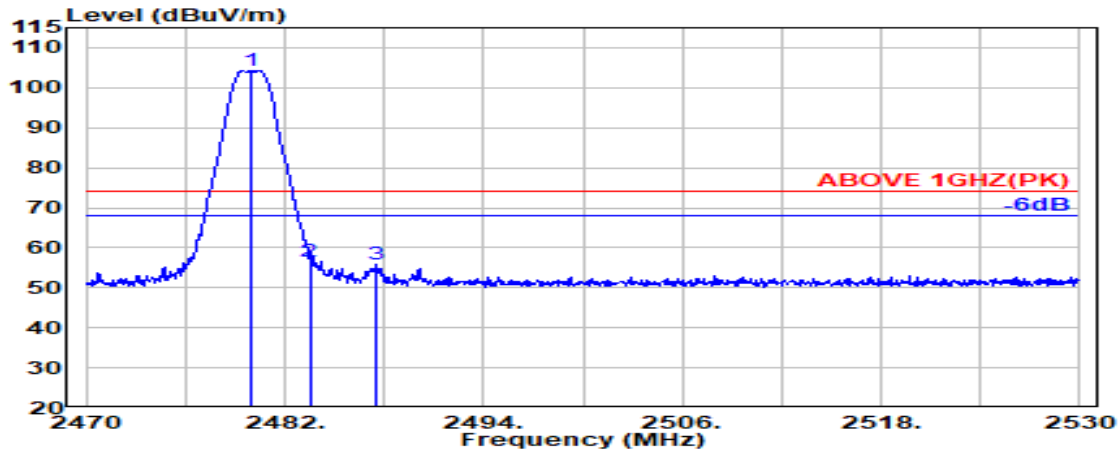

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	39.92	109.47	104.17	---	---	Peak
2483.500	28.47	6.17	39.92	61.97	56.68	74.00	17.32	Peak
2487.550	28.48	6.17	39.92	61.19	55.92	74.00	18.08	Peak

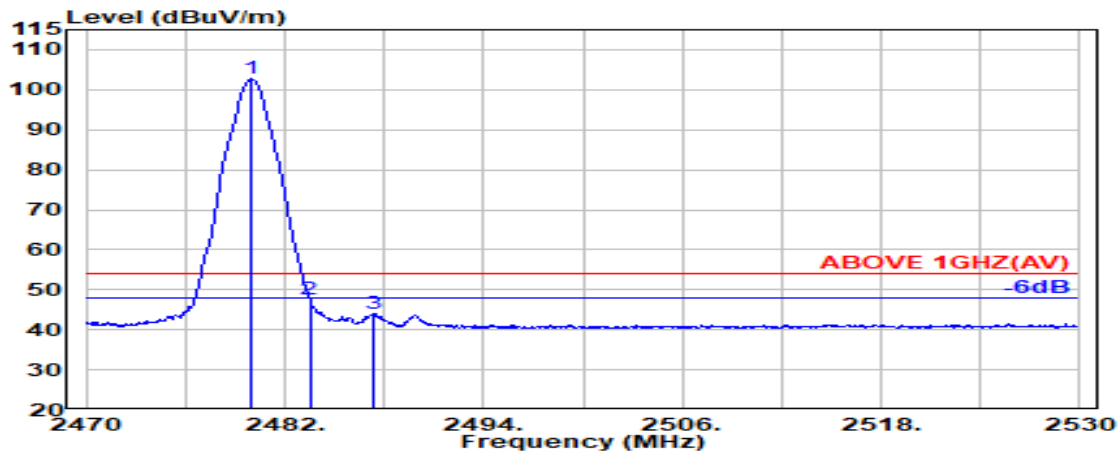


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	107.93	102.64	---	---	Average
2483.500	28.47	6.17	39.92	52.82	47.53	54.00	6.47	Average
2487.300	28.47	6.17	39.92	49.28	44.01	54.00	9.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

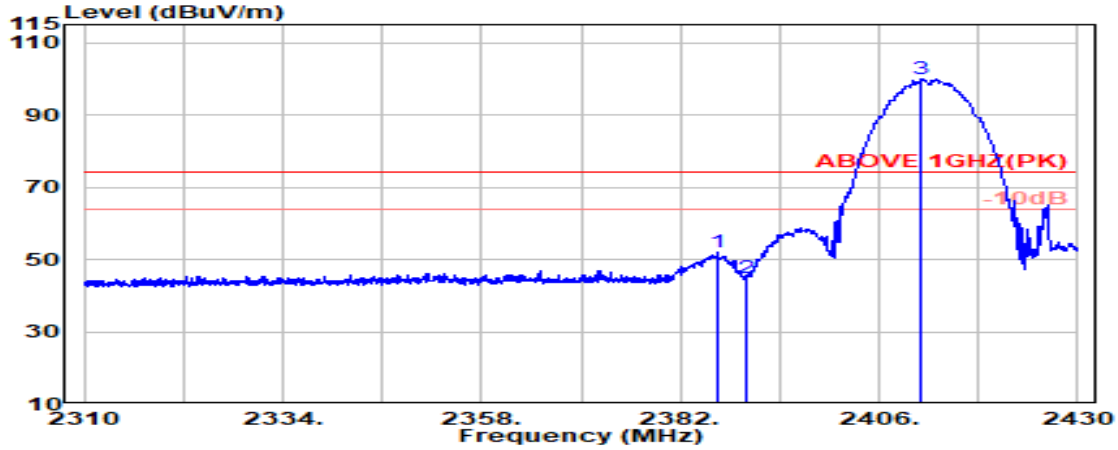

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.20	6.03	39.93	57.65	51.95	74.00	22.05	Peak
2390.000	28.20	6.03	39.93	50.39	44.69	74.00	29.31	Peak
@ 2411.150	28.24	6.07	39.93	105.48	99.86	---	---	Peak

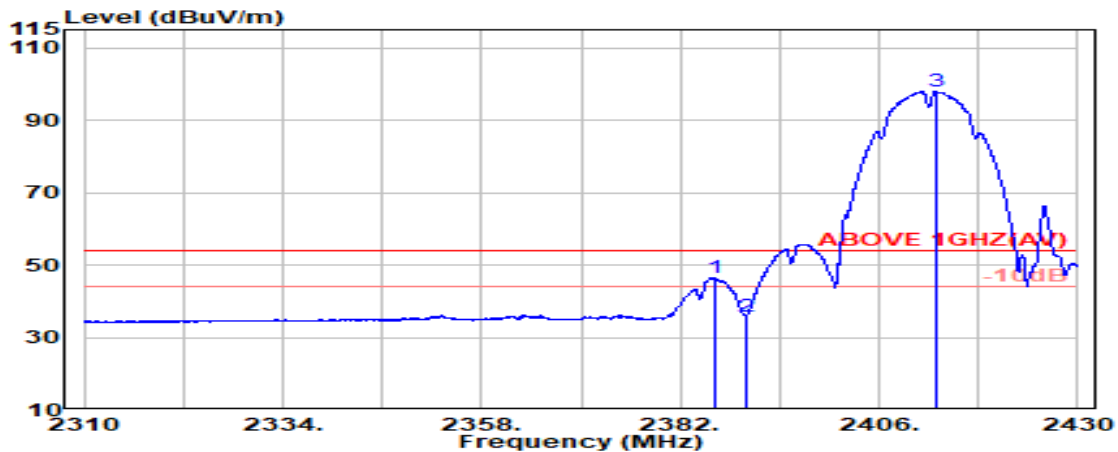


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	28.20	6.03	39.93	52.11	46.41	54.00	7.59	Average
2390.000	28.20	6.03	39.93	41.64	35.95	54.00	18.05	Average
@ 2412.800	28.25	6.07	39.93	103.60	97.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

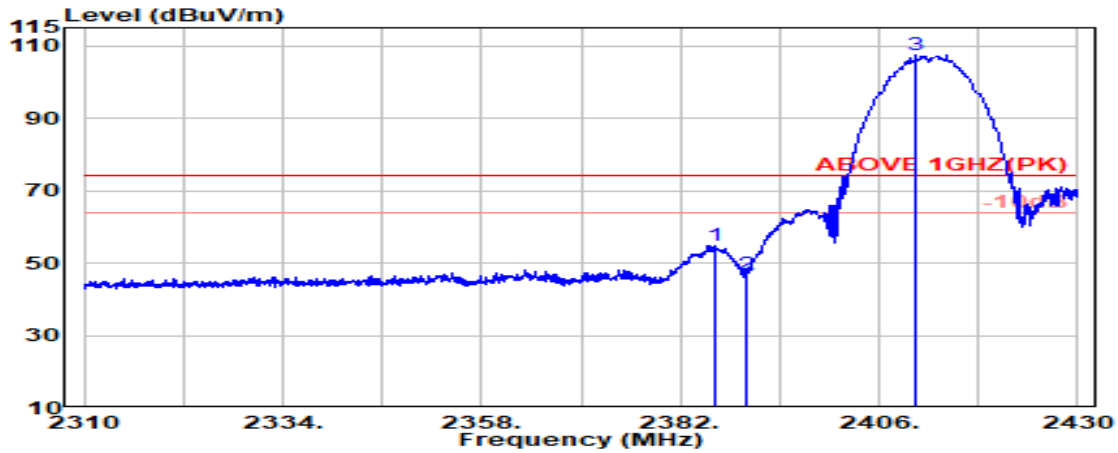

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.100	28.20	6.03	39.93	60.41	54.71	74.00	19.29	Peak
2390.000	28.20	6.03	39.93	52.40	46.71	74.00	27.29	Peak
@ 2410.350	28.24	6.06	39.93	113.26	107.64	---	---	Peak

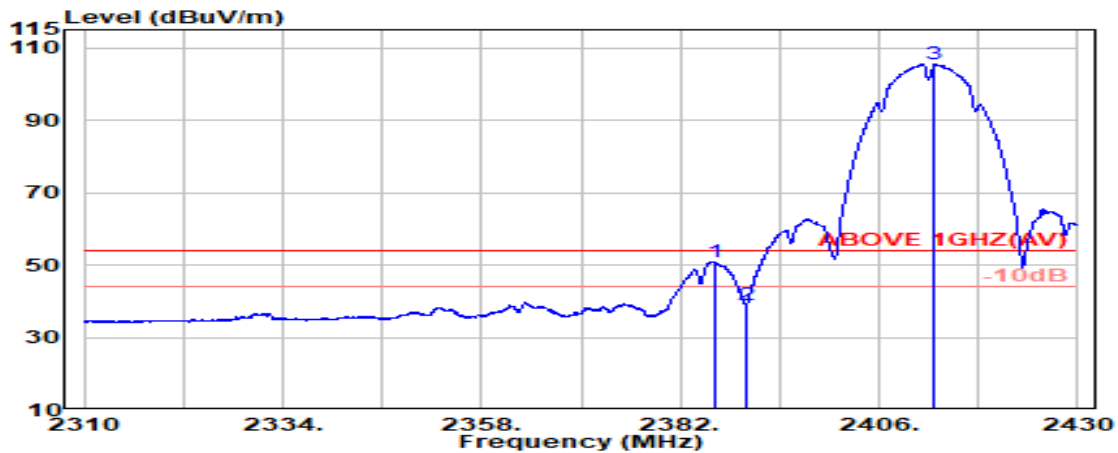


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.250	28.20	6.03	39.93	56.54	50.84	54.00	3.16	Average
2390.000	28.20	6.03	39.93	44.45	38.76	54.00	15.24	Average
@ 2412.750	28.25	6.07	39.93	111.16	105.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

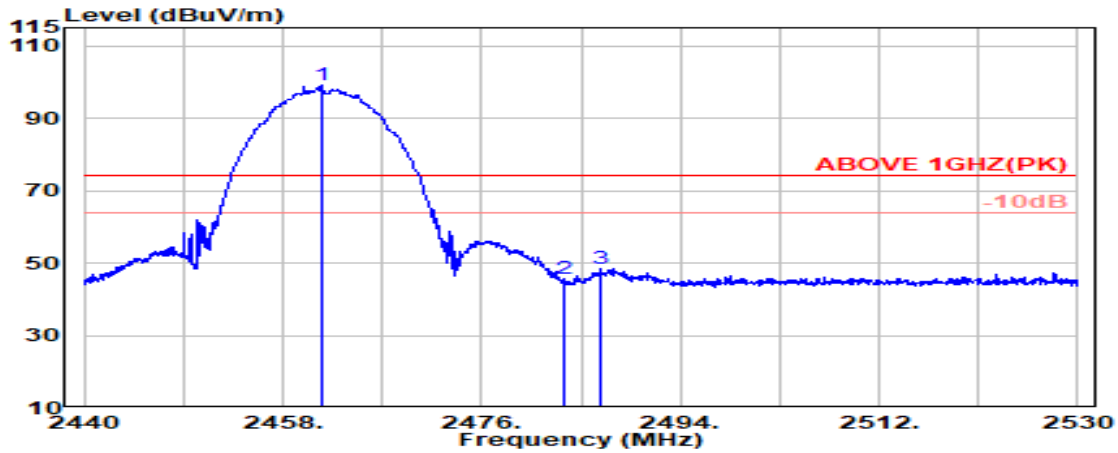

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	28.42	6.14	39.92	104.65	99.29	---	---	Peak
2483.500	28.47	6.17	39.92	51.08	45.79	74.00	28.21	Peak
2486.750	28.47	6.17	39.92	53.71	48.44	74.00	25.56	Peak

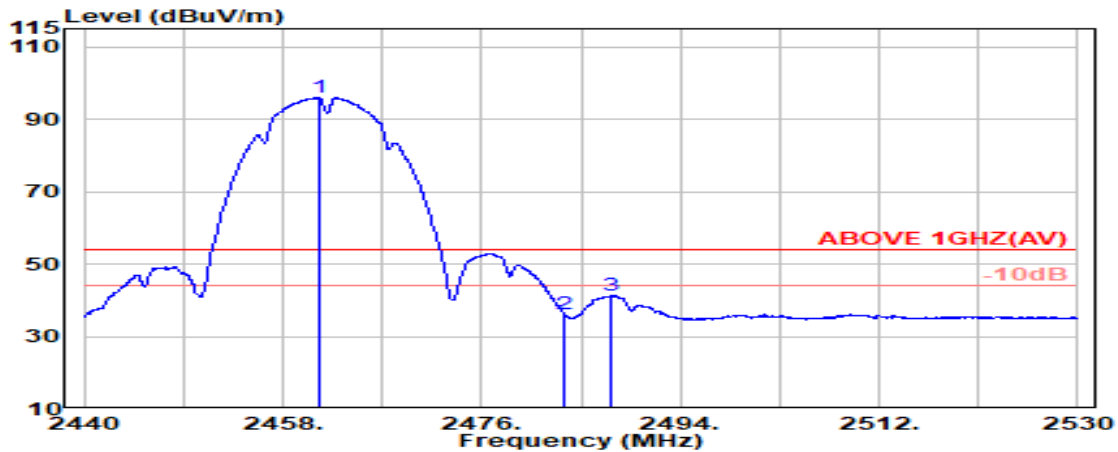


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	39.92	101.39	96.03	---	---	Average
2483.500	28.47	6.17	39.92	41.33	36.04	54.00	17.96	Average
2487.700	28.48	6.17	39.92	46.67	41.40	54.00	12.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

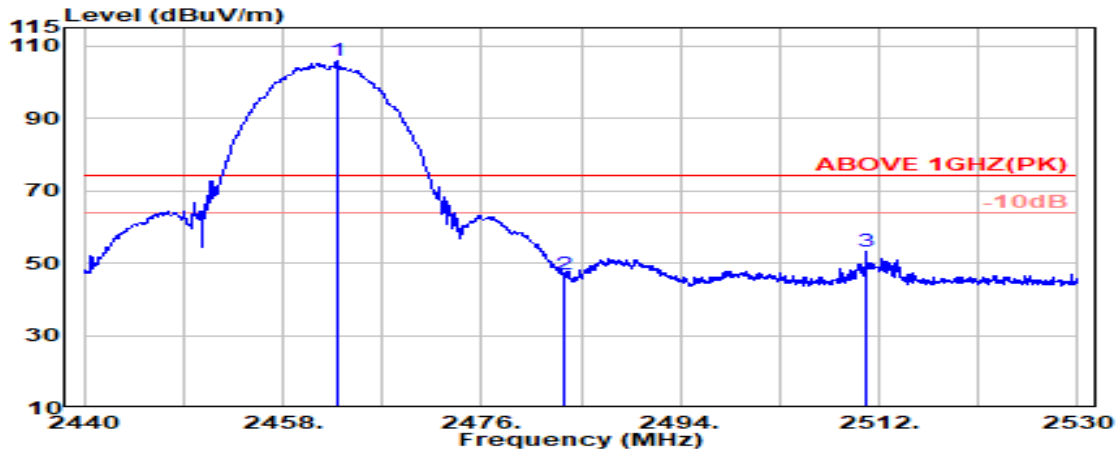

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.850	28.43	6.14	39.92	111.25	105.89	---	---	Peak
2483.500	28.47	6.17	39.92	52.32	47.04	74.00	26.96	Peak
2510.850	28.52	6.20	39.92	58.40	53.20	74.00	20.80	Peak

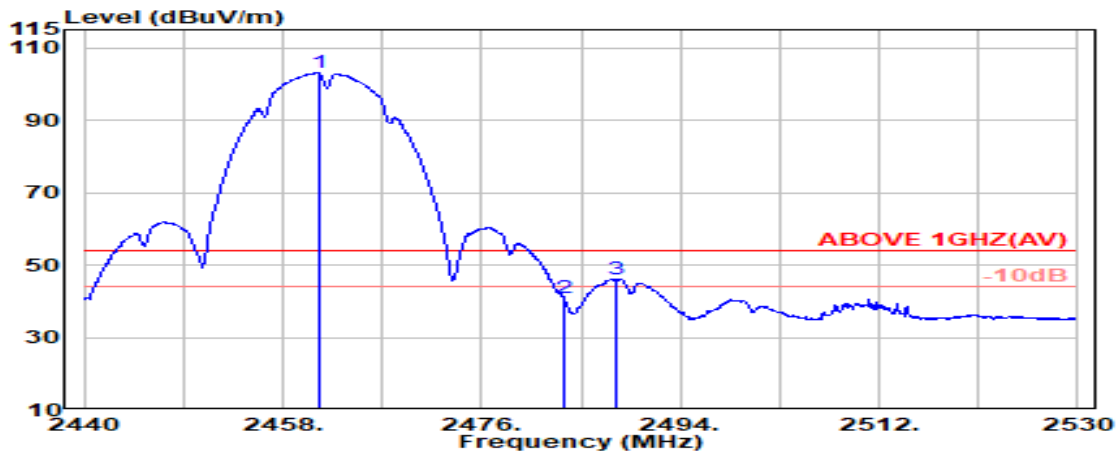


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	39.92	108.44	103.08	---	---	Average
2483.500	28.47	6.17	39.92	46.02	40.74	54.00	13.26	Average
2488.200	28.48	6.17	39.92	51.43	46.16	54.00	7.84	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

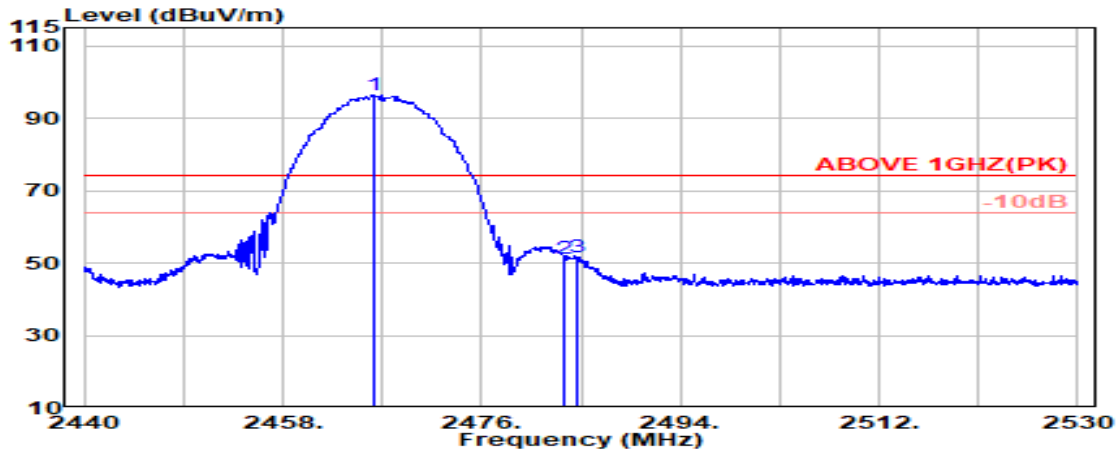

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	39.92	101.85	96.50	---	---	Peak
2483.500	28.47	6.17	39.92	56.33	51.04	74.00	22.96	Peak
2484.650	28.47	6.17	39.92	56.82	51.54	74.00	22.46	Peak

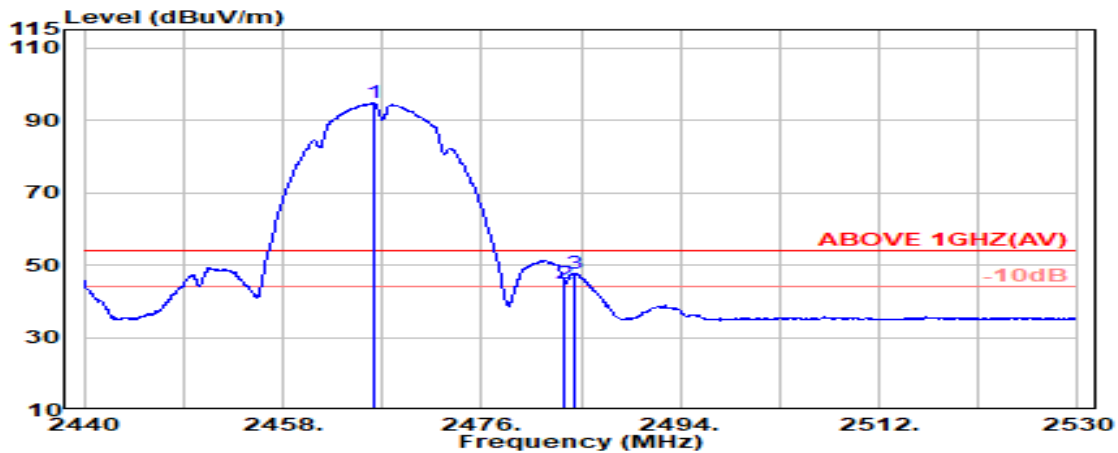


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	39.92	100.08	94.73	---	---	Average
2483.500	28.47	6.17	39.92	50.06	44.77	54.00	9.23	Average
2484.500	28.47	6.17	39.92	52.76	47.48	54.00	6.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

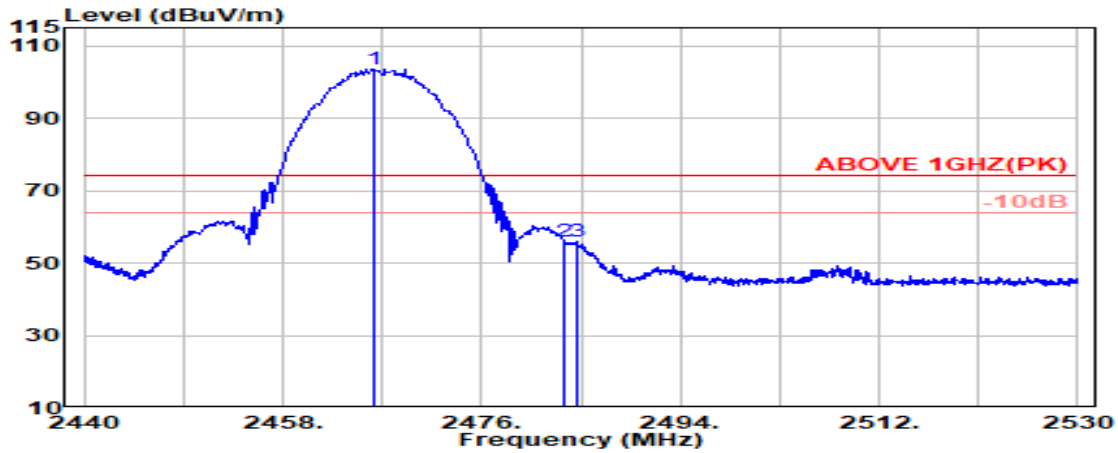

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.150	28.43	6.14	39.92	108.93	103.58	---	---	Peak
2483.500	28.47	6.17	39.92	61.19	55.90	74.00	18.10	Peak
2484.600	28.47	6.17	39.92	61.13	55.85	74.00	18.15	Peak

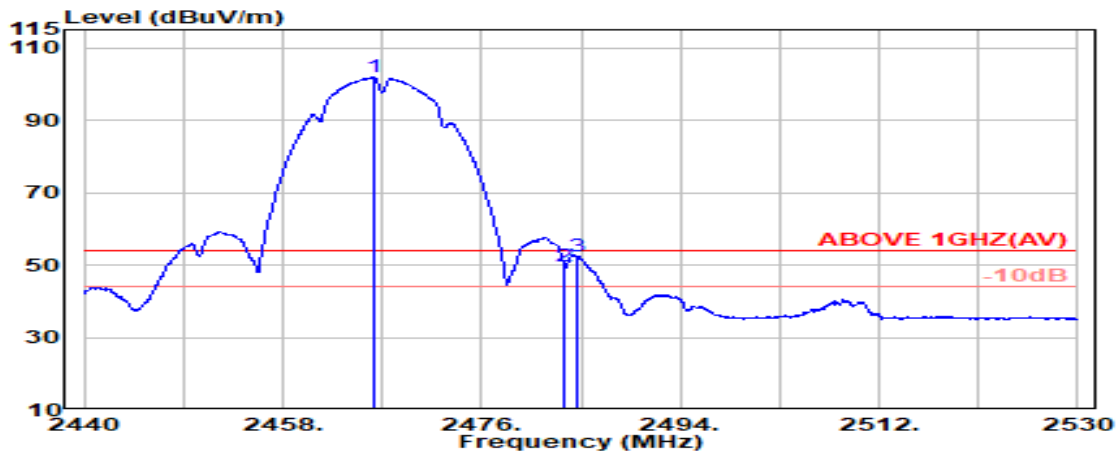


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	39.92	107.18	101.84	---	---	Average
2483.500	28.47	6.17	39.92	54.98	49.70	54.00	4.30	Average
2484.550	28.47	6.17	39.92	57.77	52.49	54.00	1.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

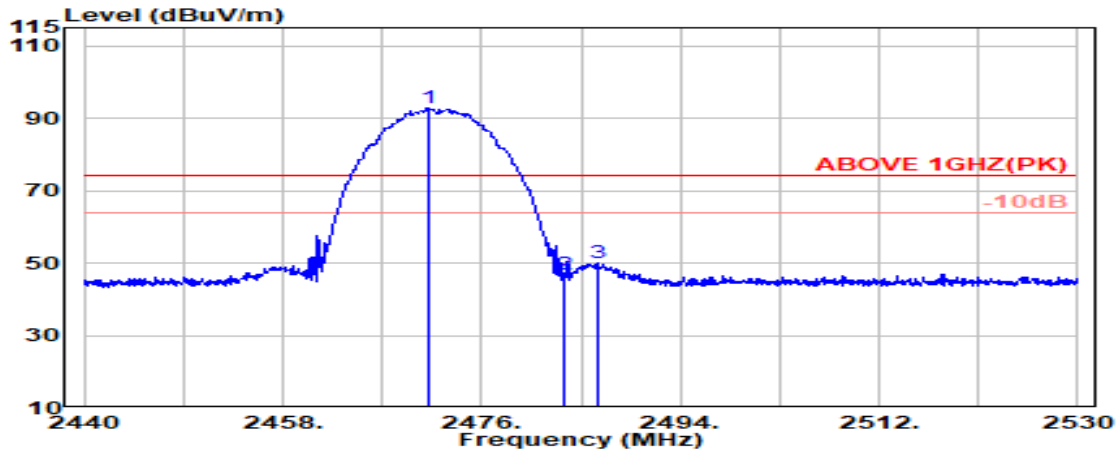

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.44	6.15	39.92	98.10	92.77	---	---	Peak
2483.500	28.47	6.17	39.92	52.30	47.01	74.00	26.99	Peak
2486.600	28.47	6.17	39.92	55.46	50.18	74.00	23.82	Peak

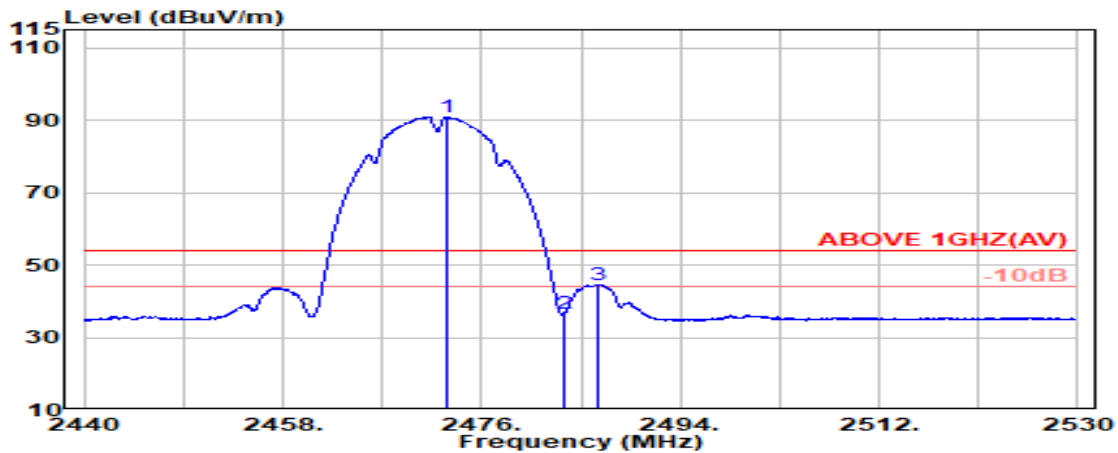


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	28.45	6.15	39.92	96.26	90.93	---	---	Average
2483.500	28.47	6.17	39.92	41.91	36.62	54.00	17.38	Average
2486.650	28.47	6.17	39.92	49.88	44.60	54.00	9.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

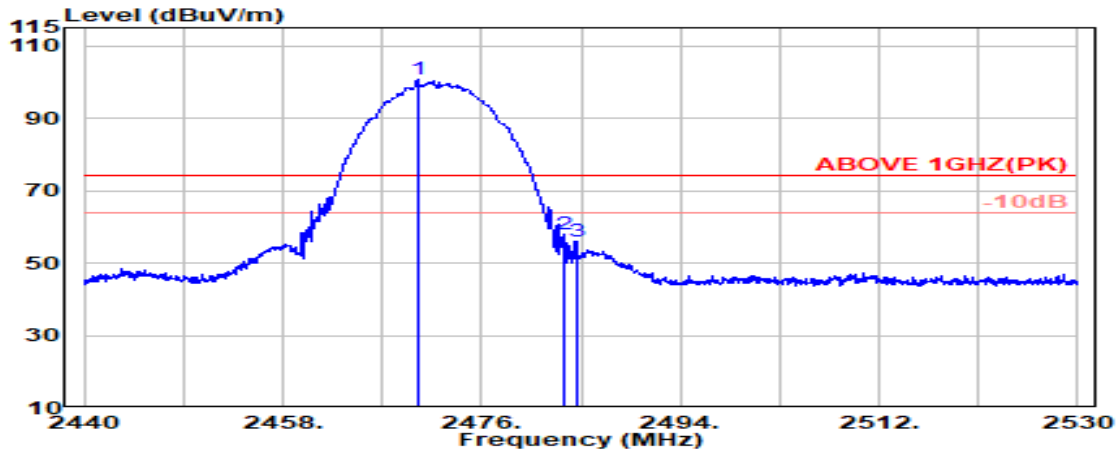

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	28.44	6.15	39.92	106.05	100.72	---	---	Peak
2483.500	28.47	6.17	39.92	63.14	57.85	74.00	16.15	Peak
2484.650	28.47	6.17	39.92	61.22	55.93	74.00	18.07	Peak

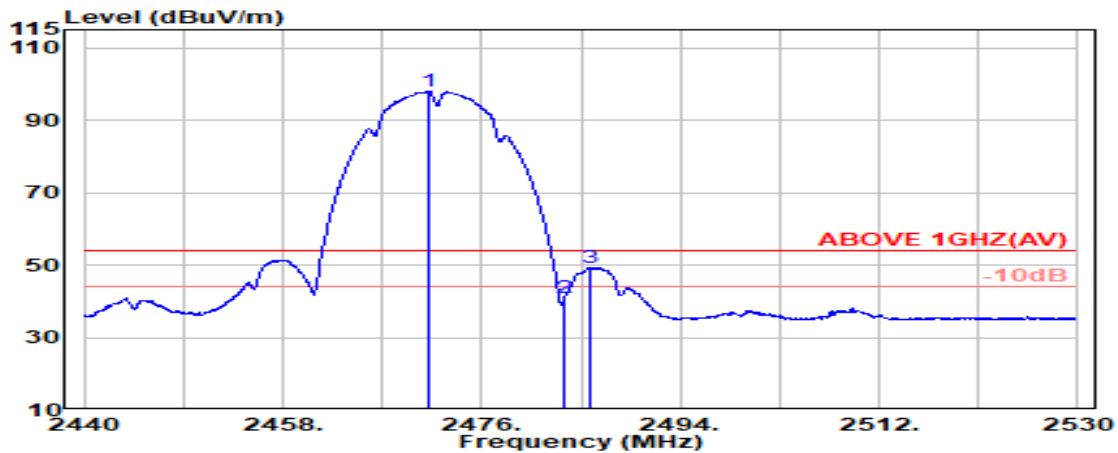


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	6.15	39.92	103.36	98.03	---	---	Average
2483.500	28.47	6.17	39.92	46.37	41.08	54.00	12.92	Average
2485.850	28.47	6.17	39.92	54.69	49.41	54.00	4.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

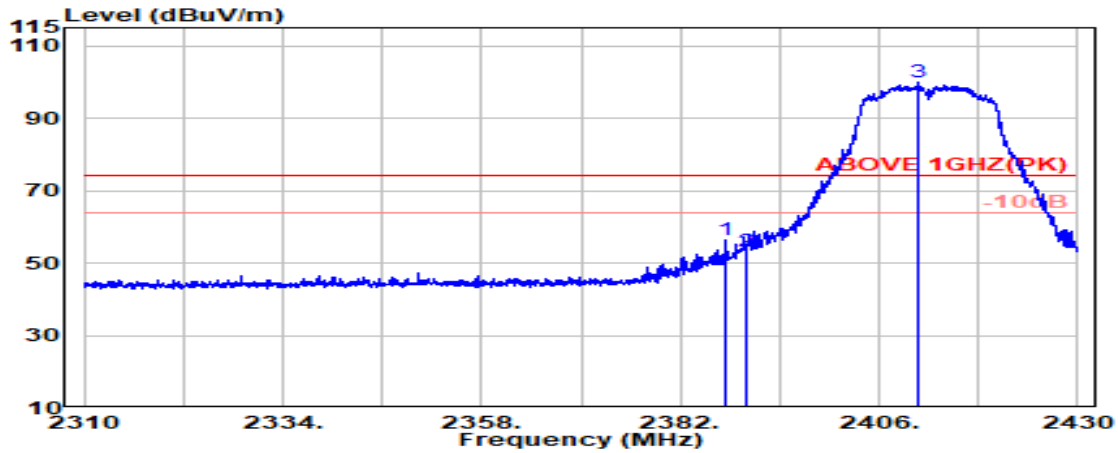

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	28.20	6.03	39.93	62.11	56.41	74.00	17.59	Peak
2390.000	28.20	6.03	39.93	58.86	53.16	74.00	20.84	Peak
@ 2410.650	28.24	6.06	39.93	105.58	99.96	---	---	Peak

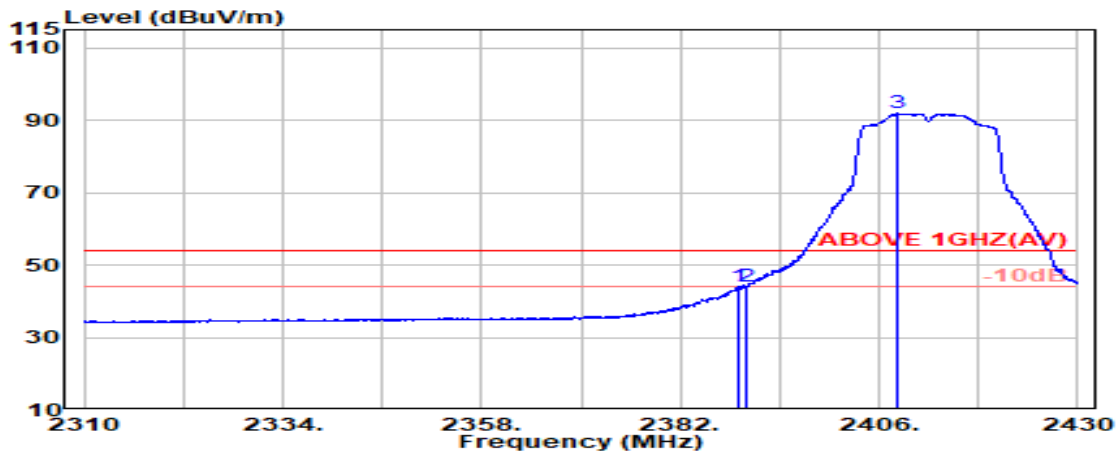


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.20	6.03	39.93	49.76	44.07	54.00	9.93	Average
2390.000	28.20	6.03	39.93	49.95	44.25	54.00	9.75	Average
@ 2408.150	28.23	6.06	39.93	97.46	91.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

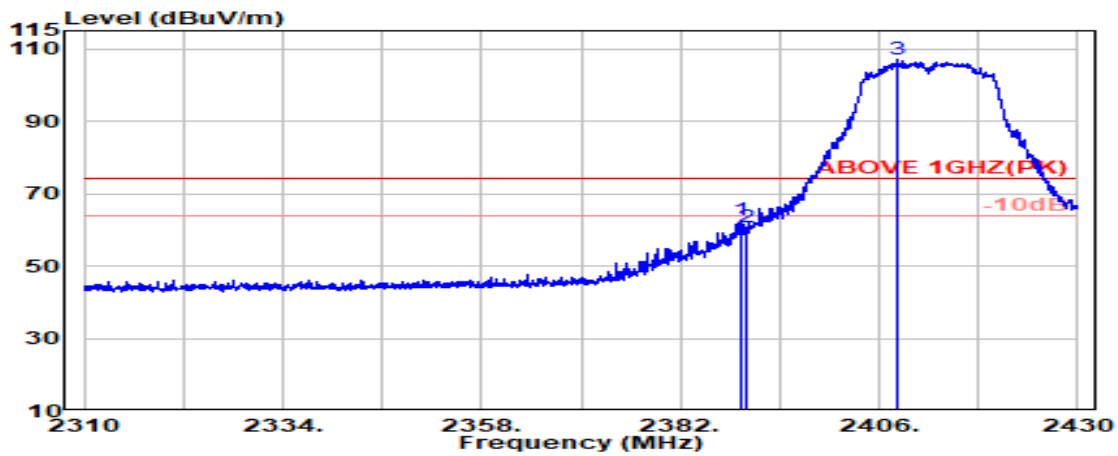

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	6.03	39.93	68.25	62.56	74.00	11.44	Peak
2390.000	28.20	6.03	39.93	66.39	60.70	74.00	13.30	Peak
@ 2408.300	28.23	6.06	39.93	112.90	107.27	---	---	Peak

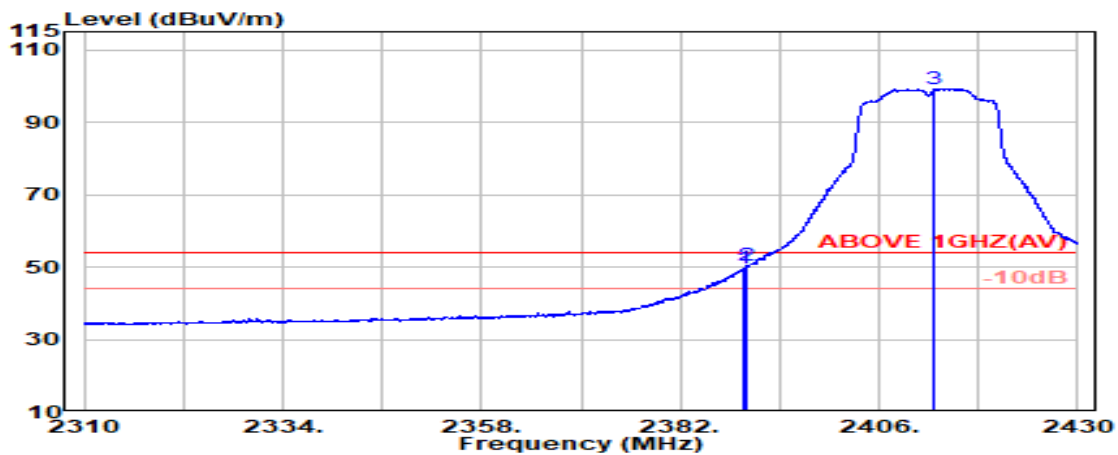


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	55.19	49.50	54.00	4.50	Average
2390.000	28.20	6.03	39.93	56.29	50.59	54.00	3.41	Average
@ 2412.750	28.25	6.07	39.93	104.90	99.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

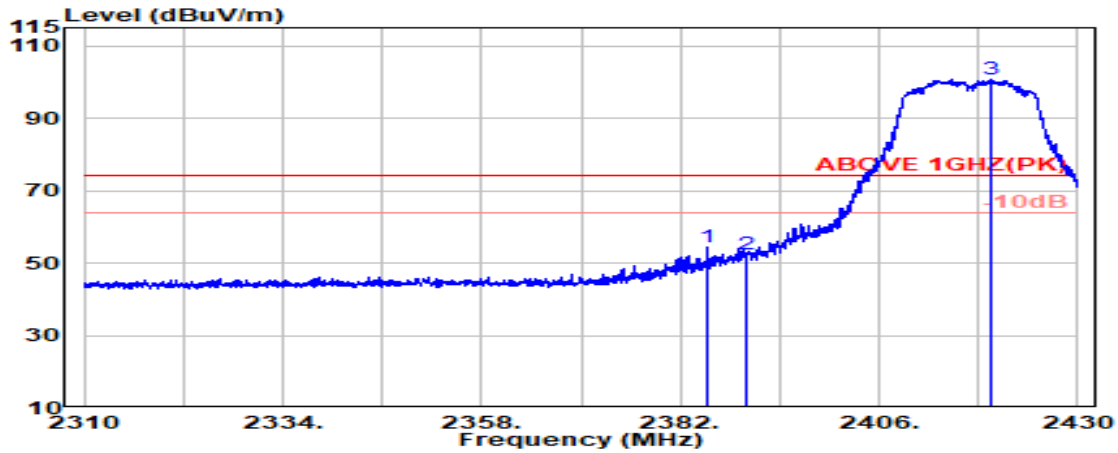

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.350	28.20	6.03	39.93	60.04	54.34	74.00	19.66	Peak
2390.000	28.20	6.03	39.93	58.10	52.40	74.00	21.60	Peak
@ 2419.550	28.28	6.08	39.93	106.16	100.59	---	---	Peak

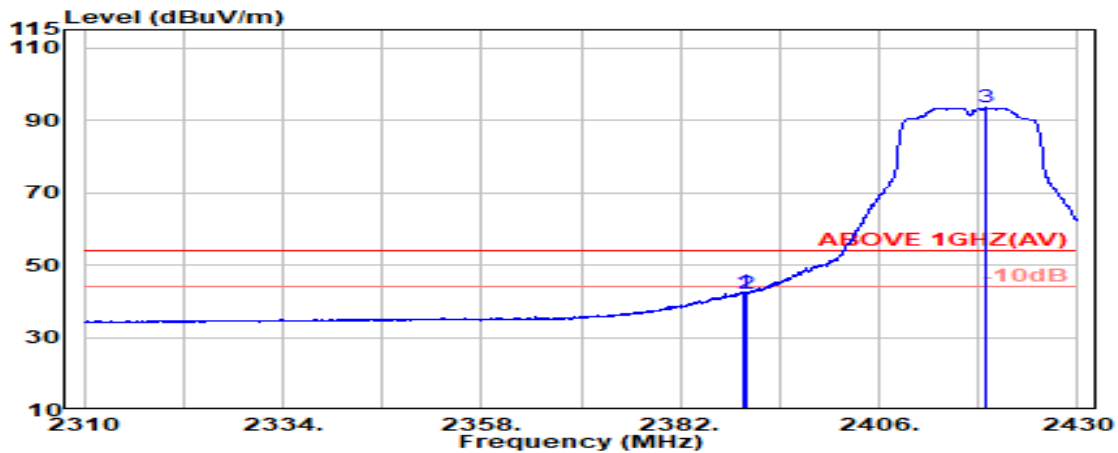


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	6.03	39.93	48.09	42.39	54.00	11.61	Average
2390.000	28.20	6.03	39.93	47.99	42.29	54.00	11.71	Average
@ 2418.850	28.28	6.08	39.93	99.00	93.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

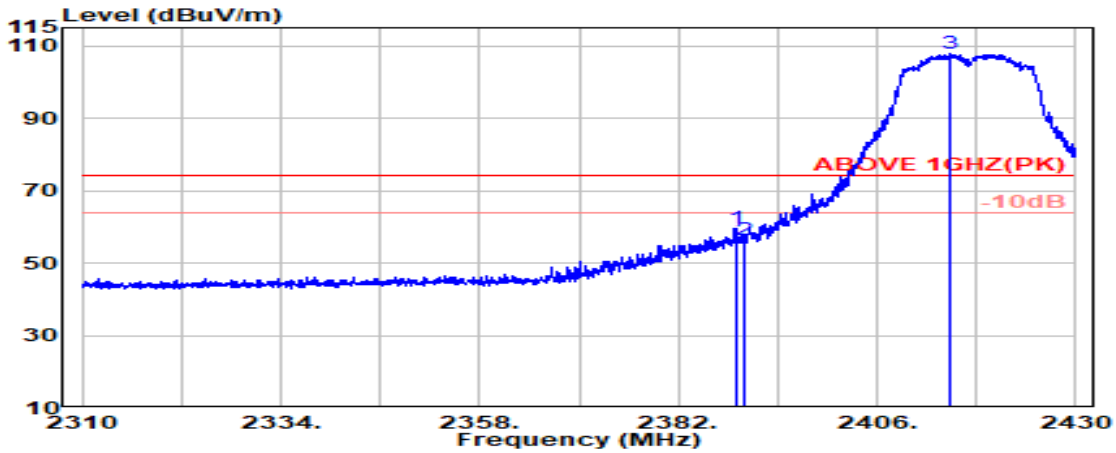

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.20	6.03	39.93	65.11	59.41	74.00	14.59	Peak
2390.000	28.20	6.03	39.93	62.21	56.52	74.00	17.48	Peak
@ 2414.700	28.26	6.07	39.93	113.35	107.76	---	---	Peak

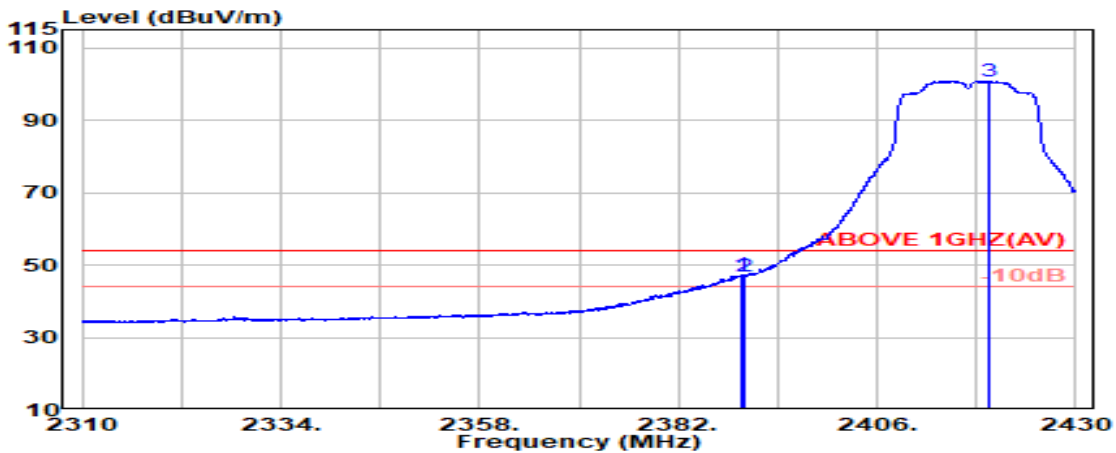


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	52.82	47.13	54.00	6.87	Average
2390.000	28.20	6.03	39.93	52.56	46.86	54.00	7.14	Average
@ 2419.650	28.28	6.08	39.93	106.49	100.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

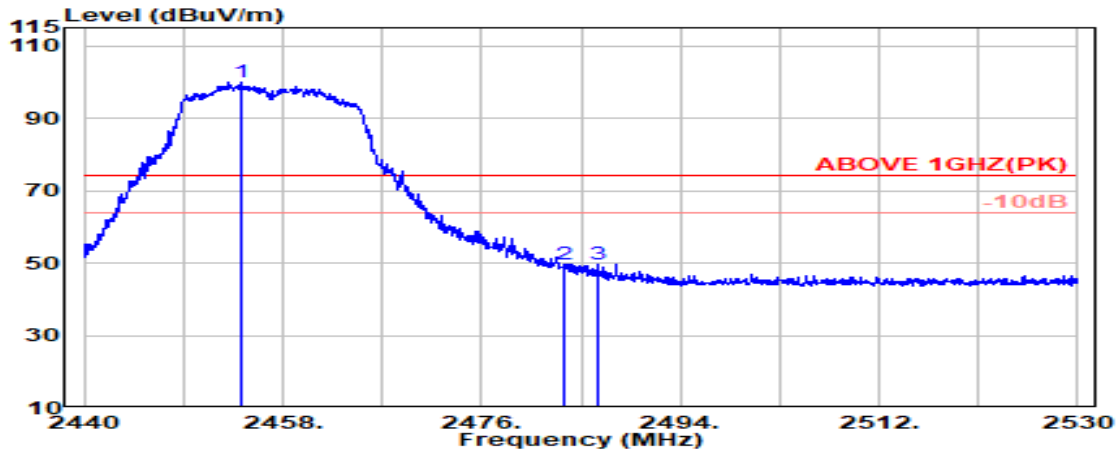

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.200	28.41	6.13	39.92	105.50	100.11	---	---	Peak
2483.500	28.47	6.17	39.92	55.03	49.74	74.00	24.26	Peak
2486.500	28.47	6.17	39.92	54.80	49.52	74.00	24.48	Peak

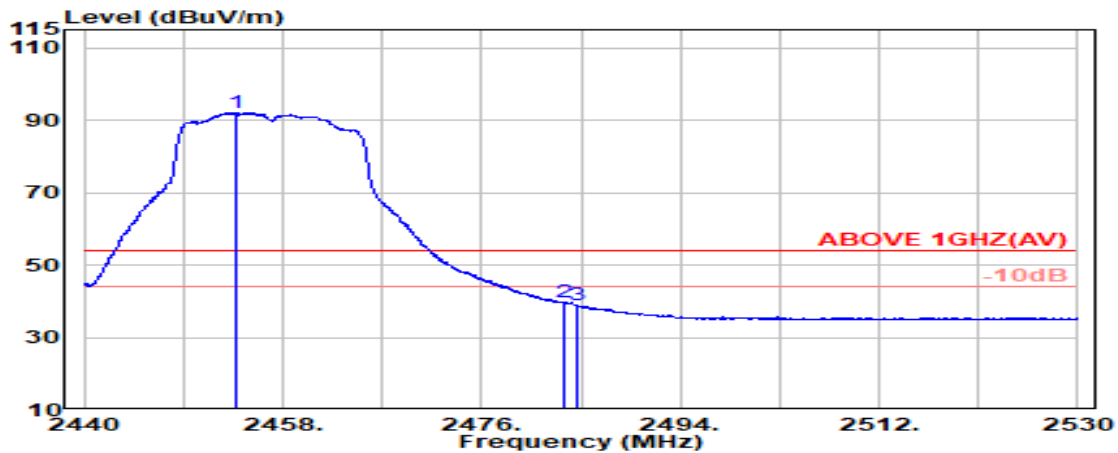


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.800	28.41	6.13	39.92	97.50	92.11	---	---	Average
2483.500	28.47	6.17	39.92	44.97	39.68	54.00	14.32	Average
2484.550	28.47	6.17	39.92	44.29	39.01	54.00	14.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

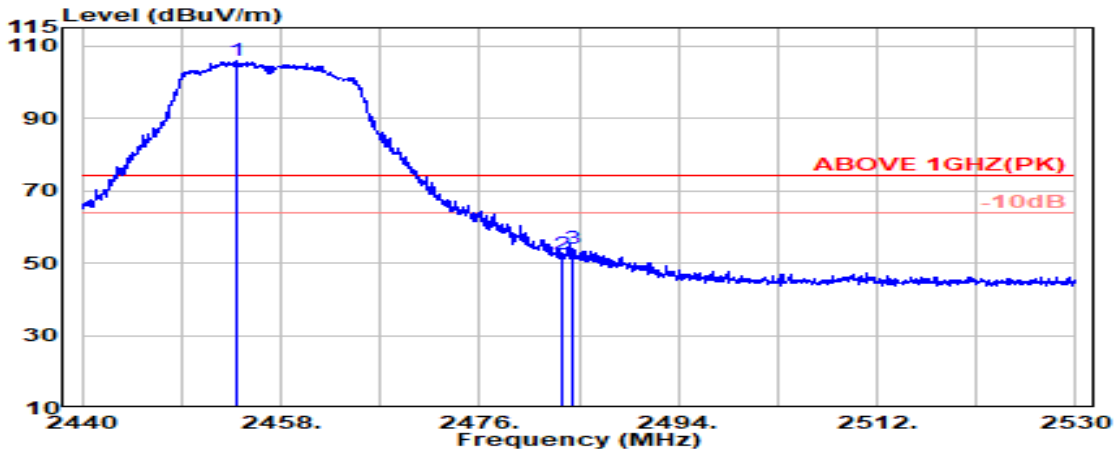

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.950	28.41	6.13	39.92	111.14	105.75	---	---	Peak
2483.500	28.47	6.17	39.92	57.72	52.44	74.00	21.56	Peak
2484.500	28.47	6.17	39.92	59.08	53.80	74.00	20.20	Peak

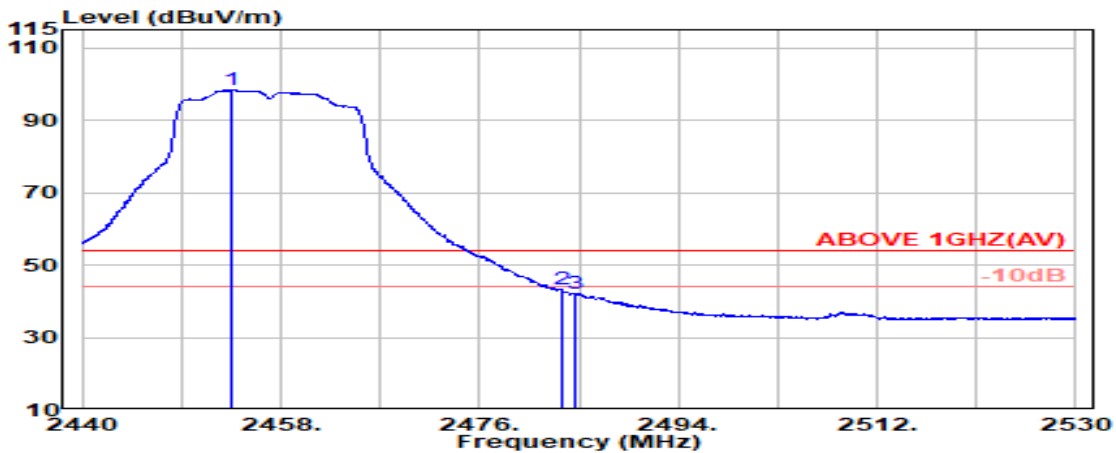


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	28.41	6.13	39.92	103.94	98.55	---	---	Average
2483.500	28.47	6.17	39.92	48.67	43.39	54.00	10.61	Average
2484.700	28.47	6.17	39.92	47.46	42.17	54.00	11.83	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

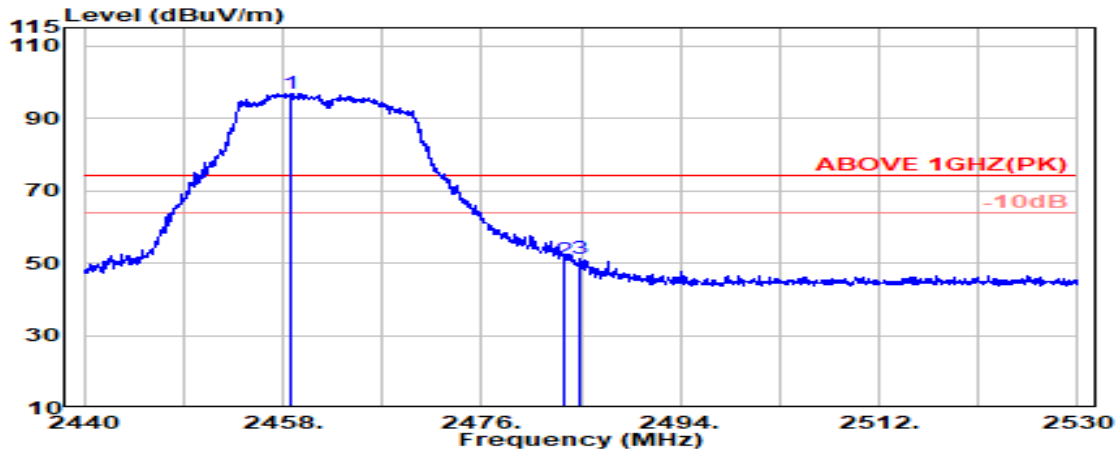

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.42	6.13	39.92	102.21	96.83	---	---	Peak
2483.500	28.47	6.17	39.92	56.30	51.01	74.00	22.99	Peak
2484.850	28.47	6.17	39.92	56.43	51.15	74.00	22.85	Peak

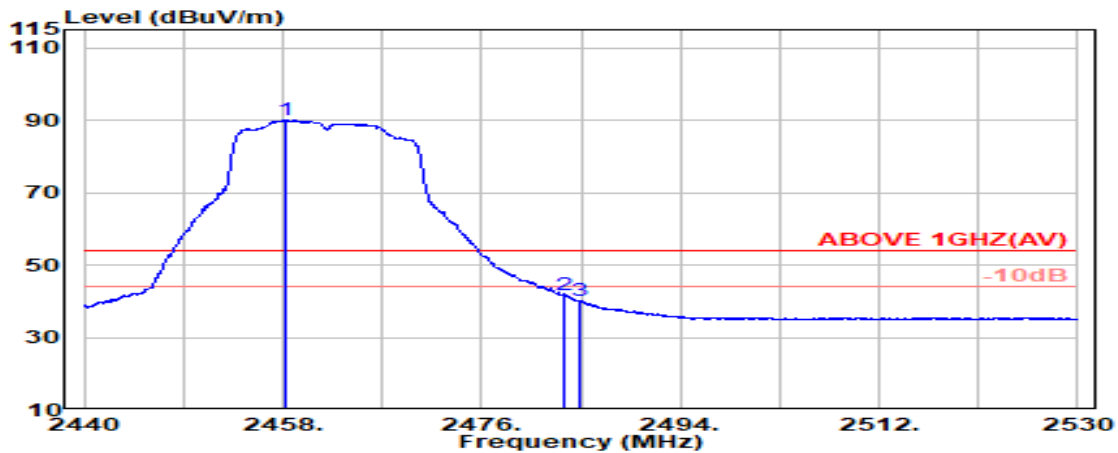


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	28.42	6.13	39.92	95.46	90.09	---	---	Average
2483.500	28.47	6.17	39.92	47.18	41.90	54.00	12.10	Average
2484.850	28.47	6.17	39.92	45.49	40.21	54.00	13.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

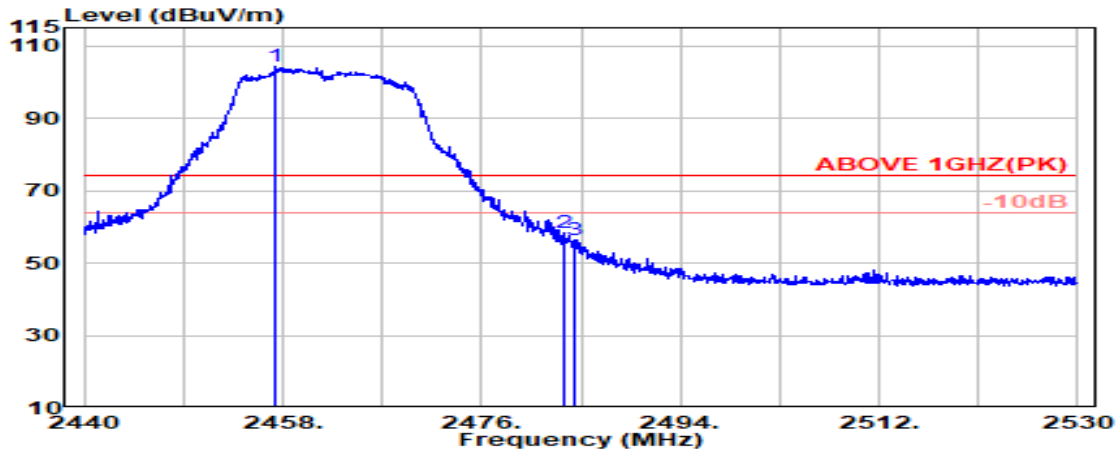

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.300	28.41	6.13	39.92	109.65	104.27	---	---	Peak
2483.500	28.47	6.17	39.92	63.44	58.15	74.00	15.85	Peak
2484.500	28.47	6.17	39.92	61.71	56.42	74.00	17.58	Peak

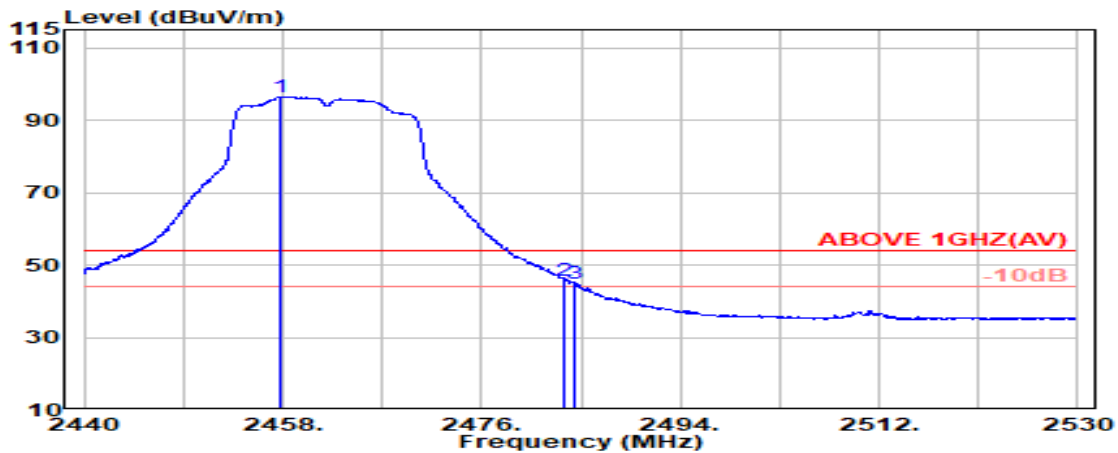


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.850	28.42	6.13	39.92	101.88	96.50	---	---	Average
2483.500	28.47	6.17	39.92	51.13	45.84	54.00	8.16	Average
2484.500	28.47	6.17	39.92	50.24	44.96	54.00	9.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

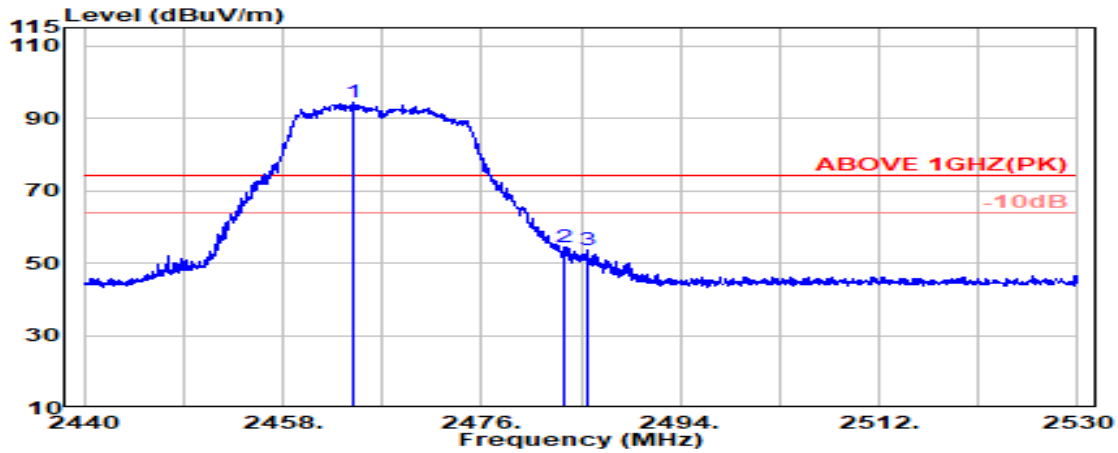

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.43	6.14	39.92	99.65	94.30	---	---	Peak
2483.500	28.47	6.17	39.92	59.62	54.33	74.00	19.67	Peak
2485.550	28.47	6.17	39.92	59.01	53.73	74.00	20.27	Peak

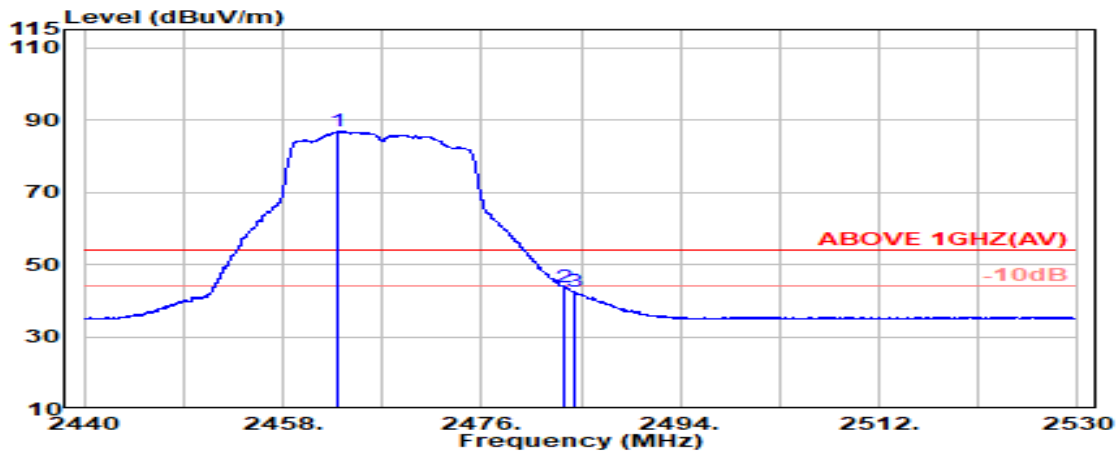


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.050	28.43	6.14	39.92	92.26	86.90	---	---	Average
2483.500	28.47	6.17	39.92	49.06	43.77	54.00	10.23	Average
2484.500	28.47	6.17	39.92	47.73	42.45	54.00	11.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

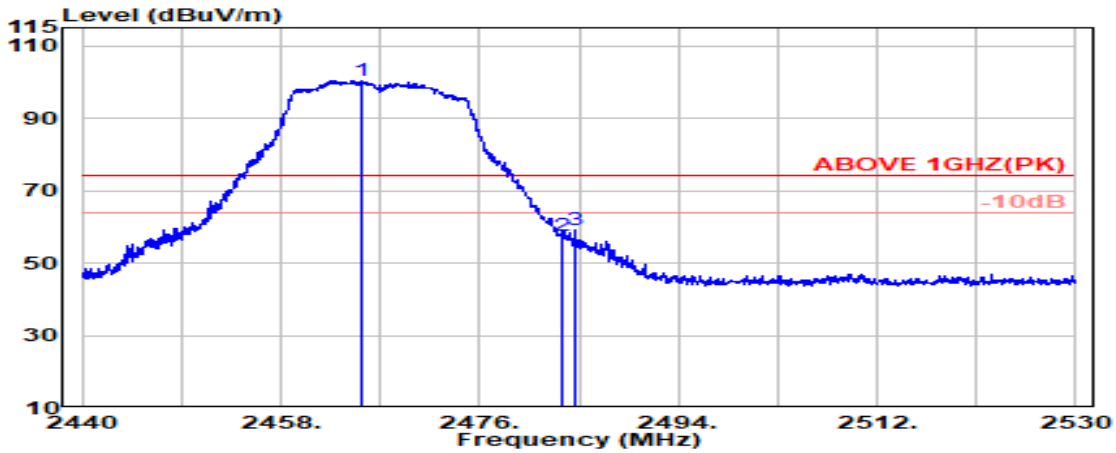

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.350	28.43	6.14	39.92	105.74	100.39	---	---	Peak
2483.500	28.47	6.17	39.92	62.78	57.49	74.00	16.51	Peak
2484.700	28.47	6.17	39.92	64.26	58.98	74.00	15.02	Peak

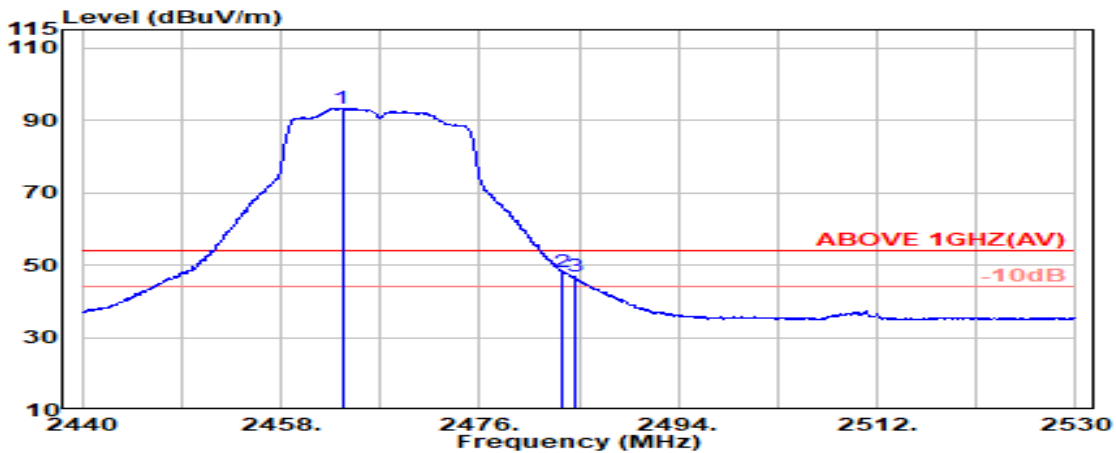


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.550	28.43	6.14	39.92	98.66	93.31	---	---	Average
2483.500	28.47	6.17	39.92	53.33	48.05	54.00	5.95	Average
2484.550	28.47	6.17	39.92	52.08	46.80	54.00	7.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

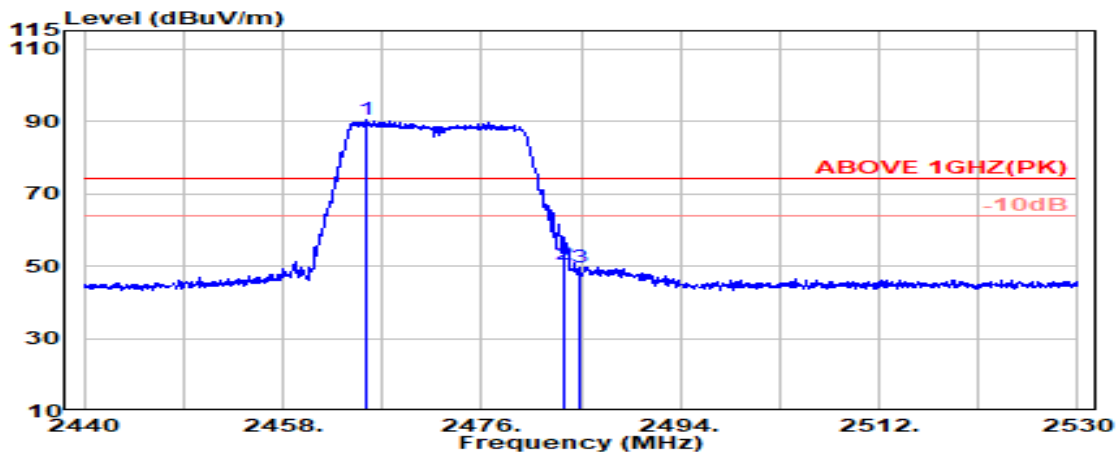

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	6.14	39.92	95.81	90.46	---	---	Peak
2483.500	28.47	6.17	39.92	55.57	50.28	74.00	23.72	Peak
2484.950	28.47	6.17	39.92	55.08	49.80	74.00	24.20	Peak

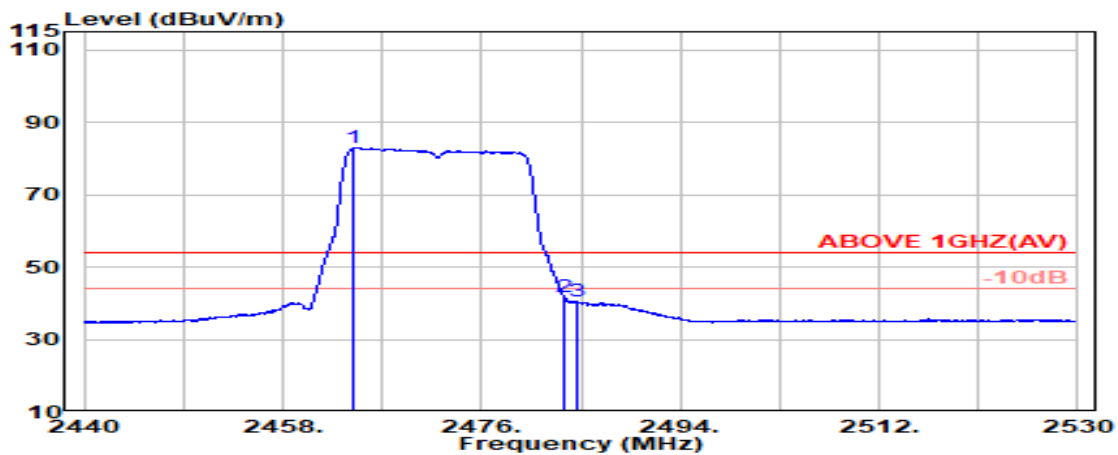


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.43	6.14	39.92	88.41	83.06	---	---	Average
2483.500	28.47	6.17	39.92	46.89	41.60	54.00	12.40	Average
2484.600	28.47	6.17	39.92	45.66	40.38	54.00	13.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

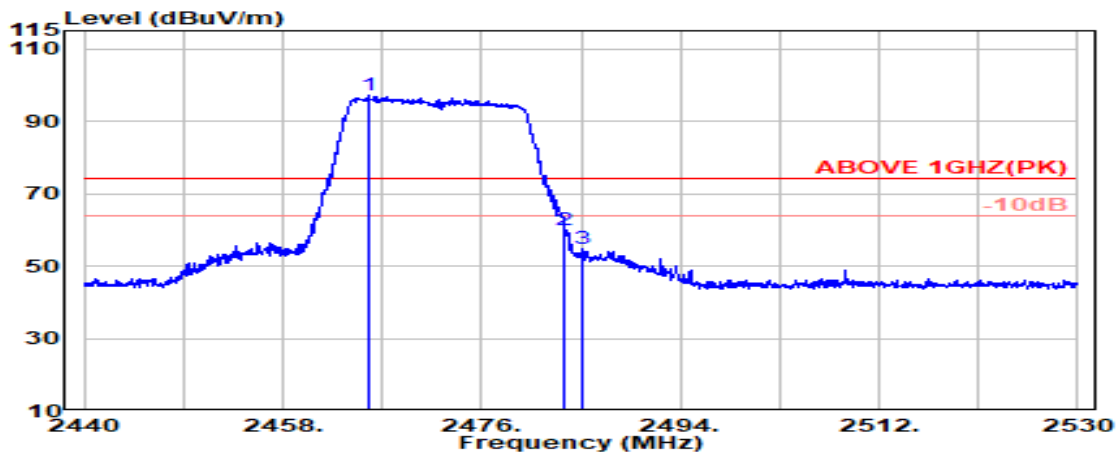

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.43	6.14	39.92	102.50	97.15	---	---	Peak
2483.500	28.47	6.17	39.92	65.02	59.73	74.00	14.27	Peak
2485.050	28.47	6.17	39.92	59.93	54.65	74.00	19.35	Peak

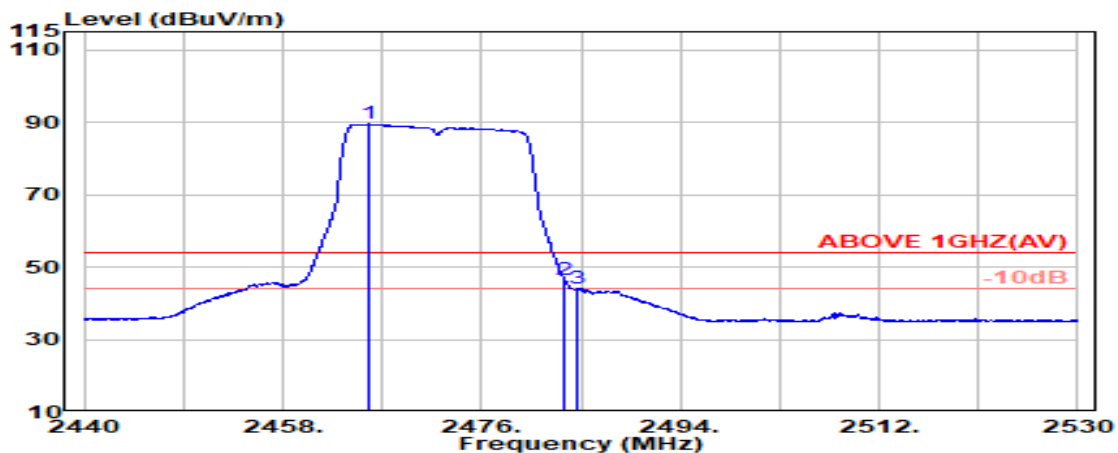


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.43	6.14	39.92	94.83	89.48	---	---	Average
2483.500	28.47	6.17	39.92	51.55	46.26	54.00	7.74	Average
2484.700	28.47	6.17	39.92	49.24	43.96	54.00	10.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

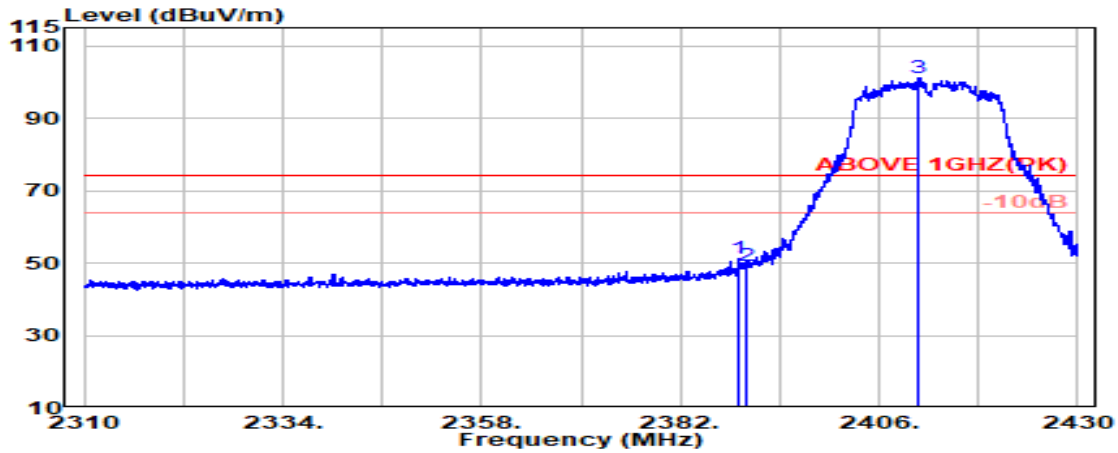

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.20	6.03	39.93	57.09	51.40	74.00	22.60	Peak
2390.000	28.20	6.03	39.93	54.80	49.11	74.00	24.89	Peak
@ 2410.850	28.24	6.06	39.93	106.92	101.30	---	---	Peak

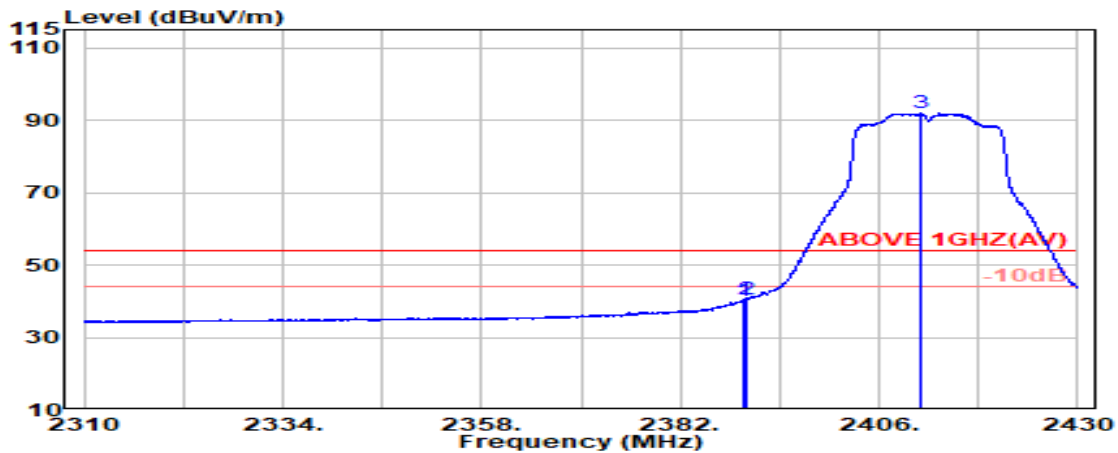


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	45.94	40.24	54.00	13.76	Average
2390.000	28.20	6.03	39.93	46.04	40.34	54.00	13.66	Average
@ 2411.050	28.24	6.06	39.93	97.50	91.88	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

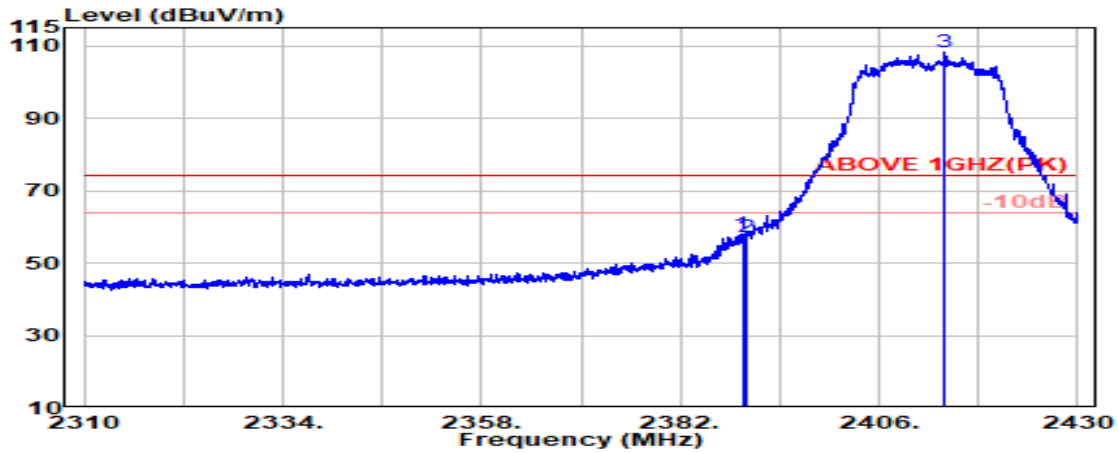

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	63.65	57.95	74.00	16.05	Peak
2390.000	28.20	6.03	39.93	62.69	56.99	74.00	17.01	Peak
@ 2414.000	28.26	6.07	39.93	114.04	108.44	---	---	Peak

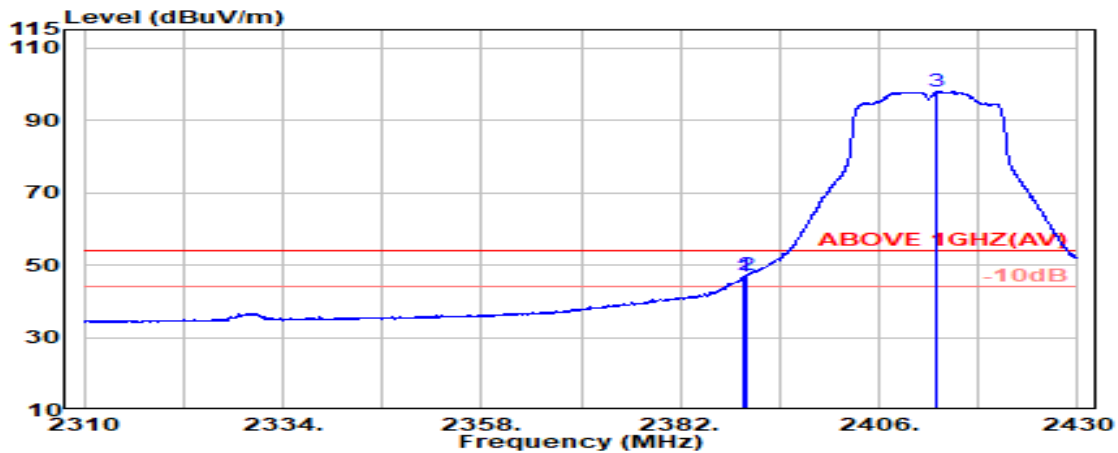


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	6.03	39.93	52.52	46.83	54.00	7.17	Average
2390.000	28.20	6.03	39.93	52.95	47.25	54.00	6.75	Average
@ 2413.050	28.25	6.07	39.93	103.59	97.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

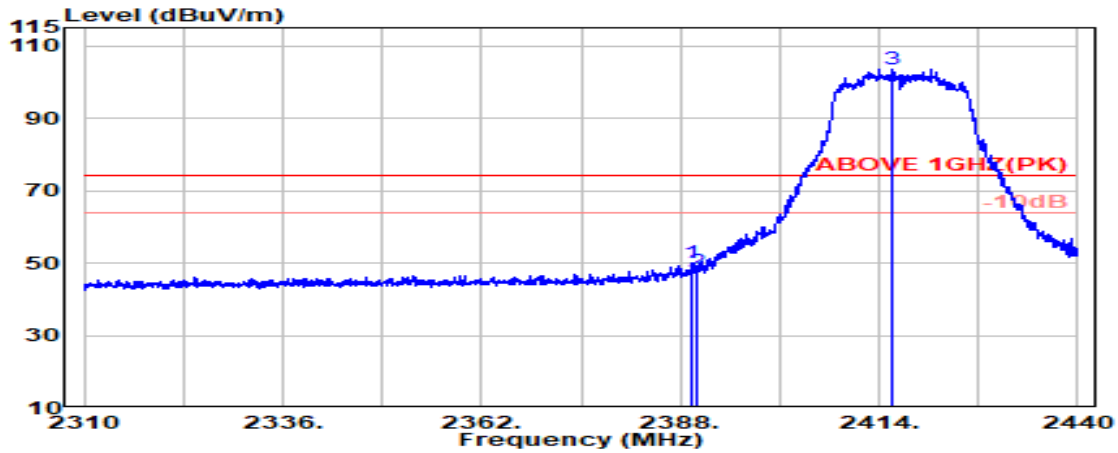

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.618	28.20	6.03	39.93	55.79	50.09	74.00	23.91	Peak
2390.000	28.20	6.03	39.93	53.51	47.82	74.00	26.18	Peak
@ 2415.834	28.26	6.07	39.93	109.29	103.69	---	---	Peak

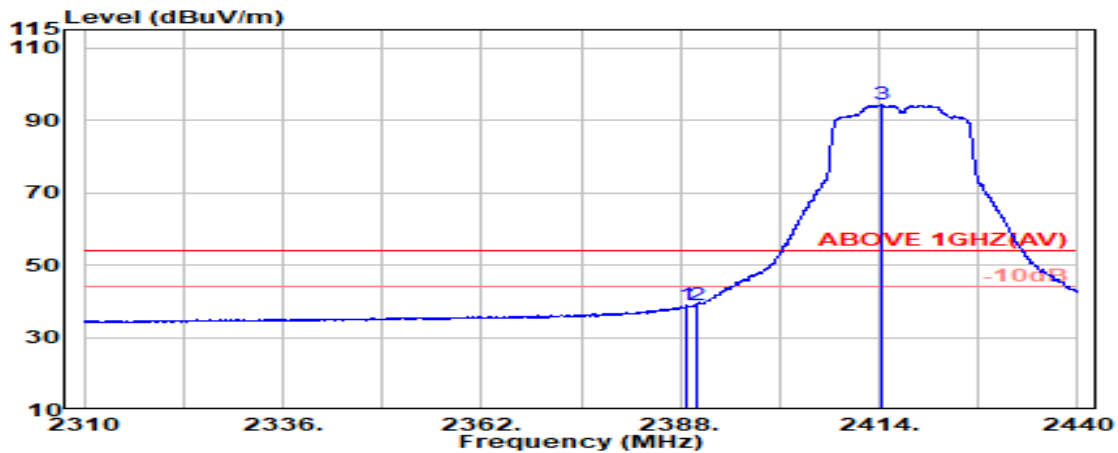


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.917	28.20	6.03	39.93	44.58	38.88	54.00	15.12	Average
2390.000	28.20	6.03	39.93	44.48	38.78	54.00	15.22	Average
@ 2414.432	28.26	6.07	39.93	99.85	94.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

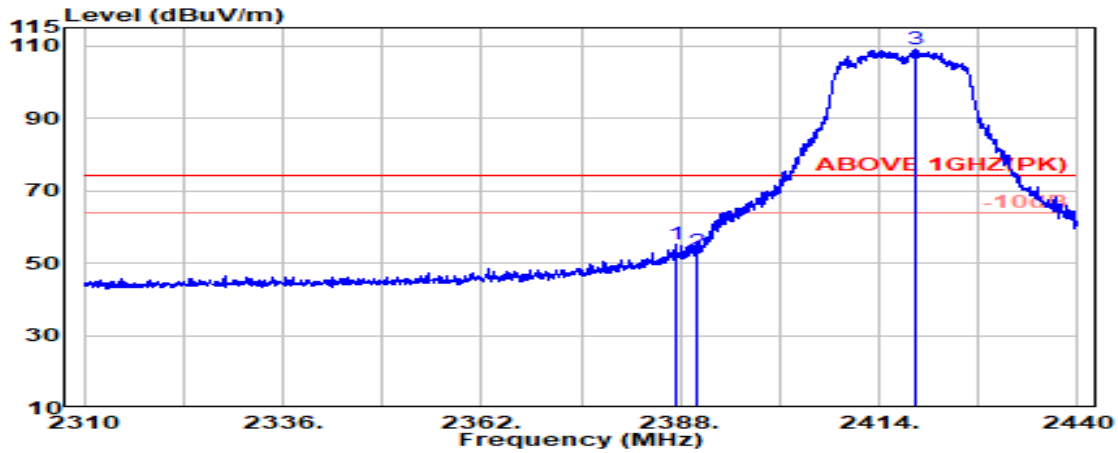

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.407	28.20	6.03	39.93	60.94	55.24	74.00	18.76	Peak
2390.000	28.20	6.03	39.93	59.02	53.32	74.00	20.68	Peak
@ 2418.639	28.28	6.08	39.93	114.47	108.89	---	---	Peak

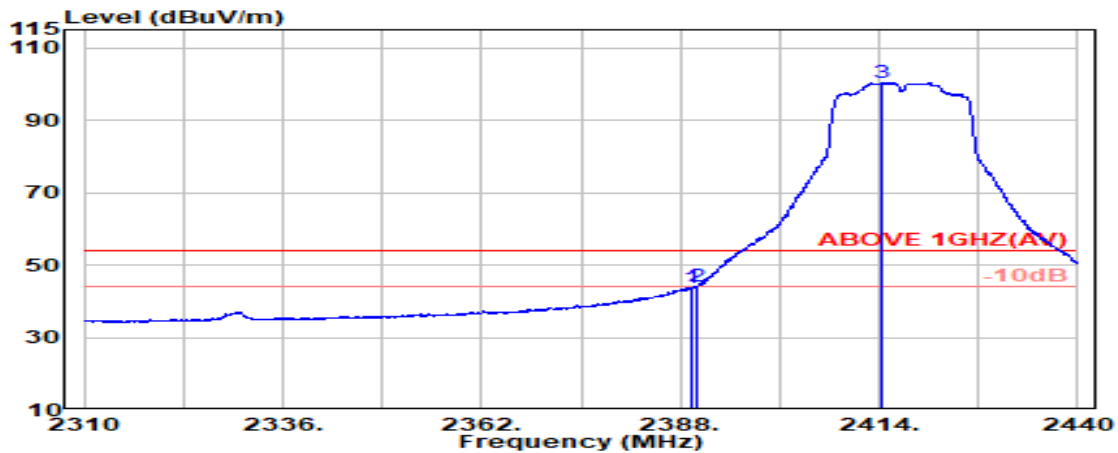


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.618	28.20	6.03	39.93	49.44	43.75	54.00	10.25	Average
2390.000	28.20	6.03	39.93	49.83	44.14	54.00	9.86	Average
@ 2414.270	28.26	6.07	39.93	106.12	100.52	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

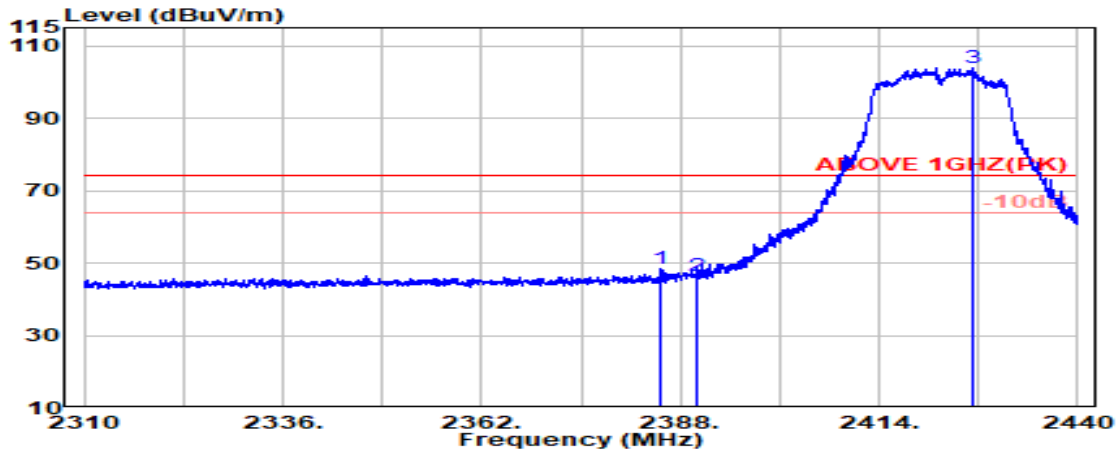

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.411	28.20	6.03	39.93	54.03	48.33	74.00	25.67	Peak
2390.000	28.20	6.03	39.93	51.96	46.26	74.00	27.74	Peak
@ 2426.353	28.31	6.09	39.93	109.56	104.03	---	---	Peak

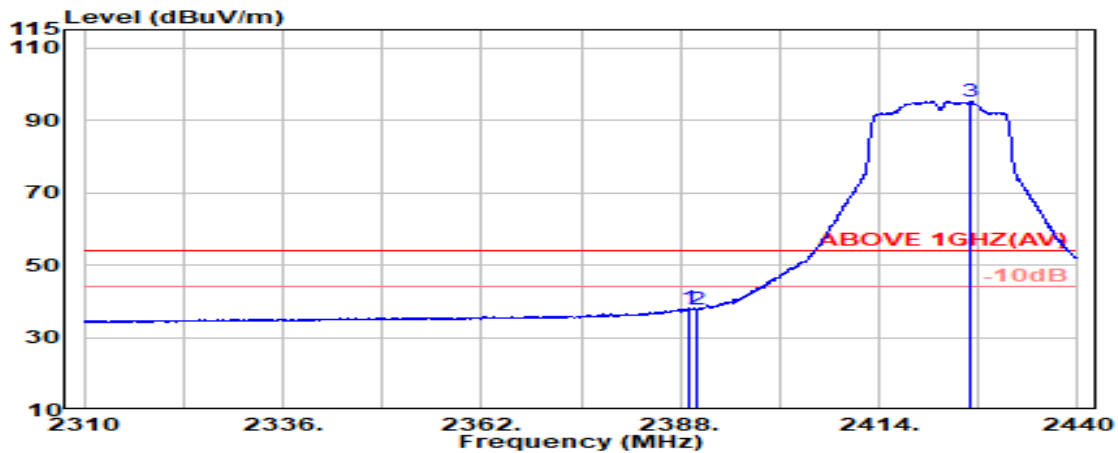


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.025	28.20	6.03	39.93	43.66	37.96	54.00	16.04	Average
2390.000	28.20	6.03	39.93	43.35	37.65	54.00	16.35	Average
@ 2425.975	28.30	6.09	39.93	100.73	95.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

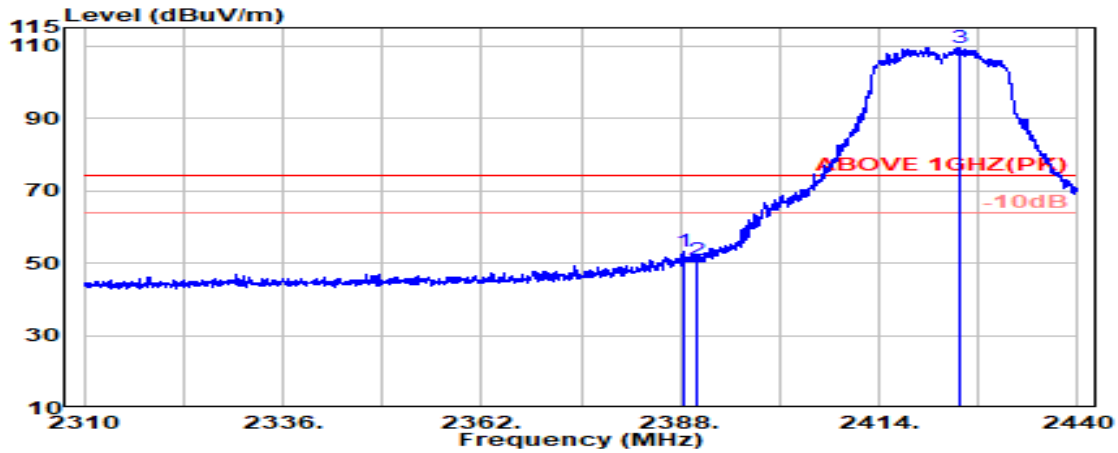

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.324	28.20	6.03	39.93	59.08	53.39	74.00	20.61	Peak
2390.000	28.20	6.03	39.93	56.58	50.89	74.00	23.11	Peak
@ 2424.573	28.30	6.08	39.93	114.97	109.43	---	---	Peak

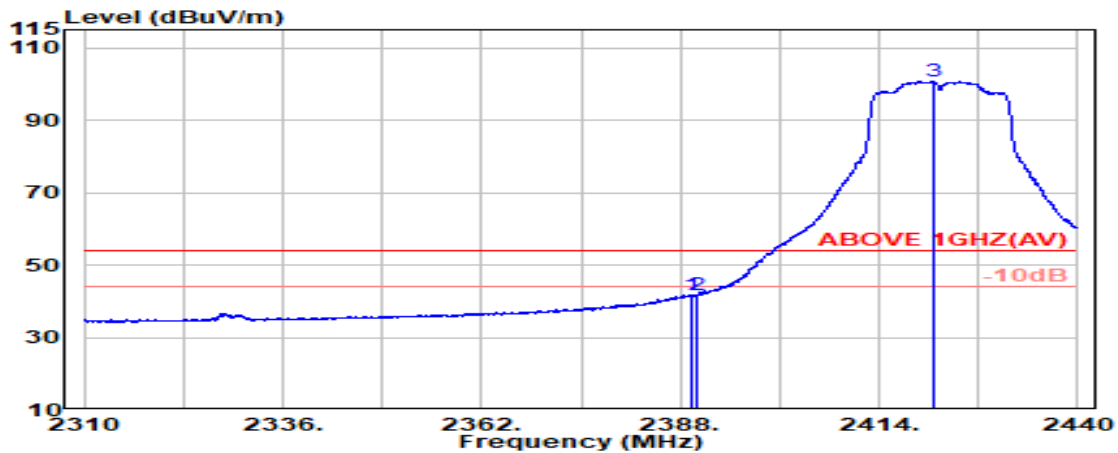


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.618	28.20	6.03	39.93	47.45	41.75	54.00	12.25	Average
2390.000	28.20	6.03	39.93	47.46	41.76	54.00	12.24	Average
@ 2421.228	28.29	6.08	39.93	106.31	100.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

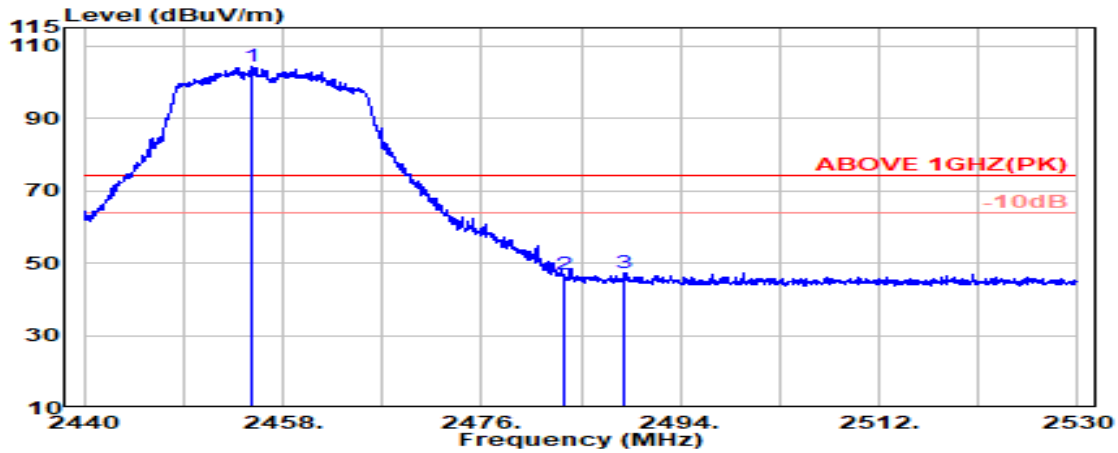

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.200	28.41	6.13	39.92	109.67	104.29	---	---	Peak
2483.500	28.47	6.17	39.92	52.20	46.91	74.00	27.09	Peak
2489.000	28.48	6.17	39.92	52.41	47.14	74.00	26.86	Peak

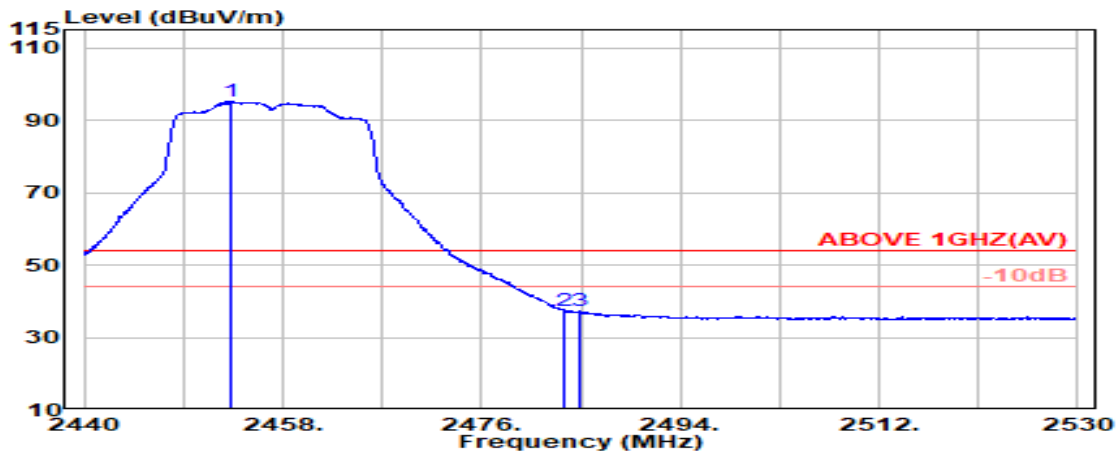


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.300	28.41	6.12	39.92	100.72	95.32	---	---	Average
2483.500	28.47	6.17	39.92	42.62	37.33	54.00	16.67	Average
2484.800	28.47	6.17	39.92	42.57	37.29	54.00	16.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

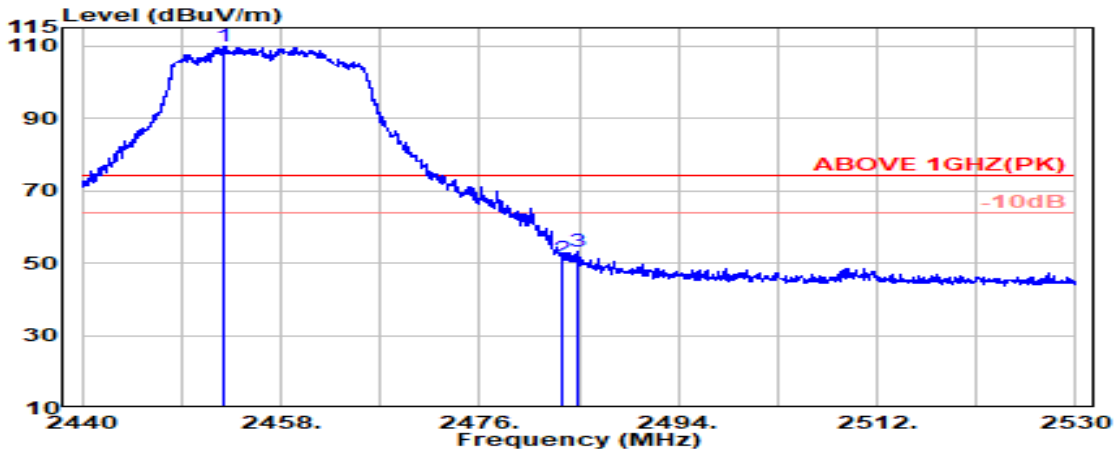

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.900	28.41	6.12	39.92	115.20	109.81	---	---	Peak
2483.500	28.47	6.17	39.92	56.53	51.24	74.00	22.76	Peak
2484.950	28.47	6.17	39.92	58.51	53.23	74.00	20.77	Peak

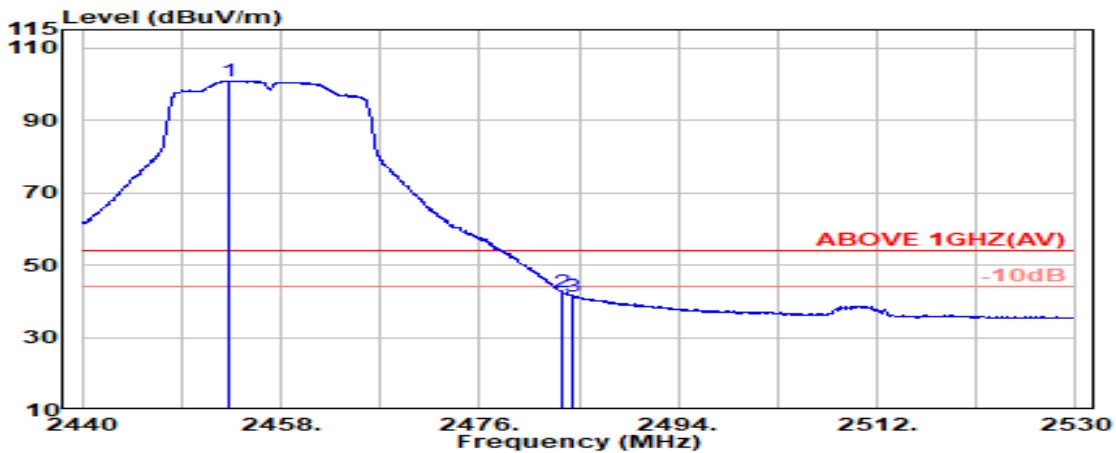


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.200	28.41	6.12	39.92	106.31	100.92	---	---	Average
2483.500	28.47	6.17	39.92	47.86	42.58	54.00	11.42	Average
2484.500	28.47	6.17	39.92	46.63	41.35	54.00	12.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

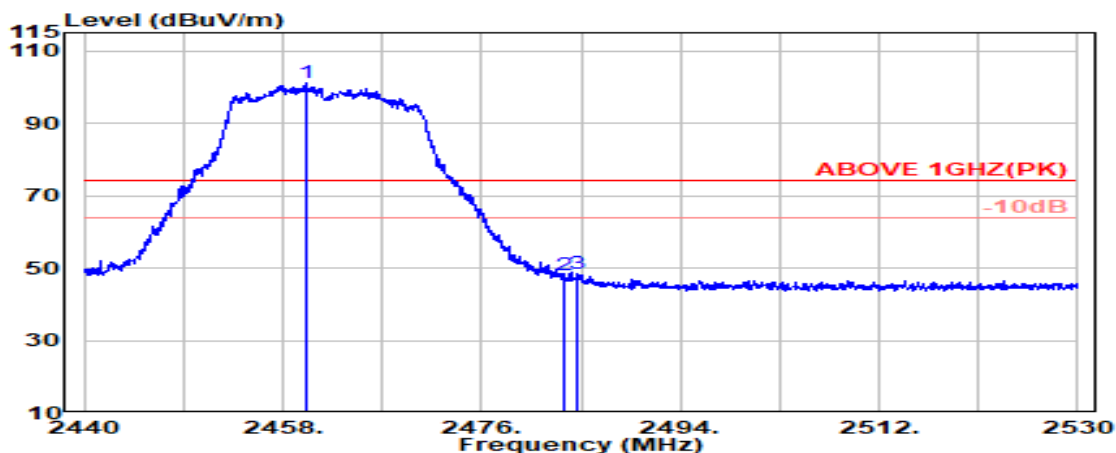

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.150	28.42	6.13	39.92	106.31	100.94	---	---	Peak
2483.500	28.47	6.17	39.92	53.41	48.12	74.00	25.88	Peak
2484.750	28.47	6.17	39.92	53.64	48.36	74.00	25.64	Peak

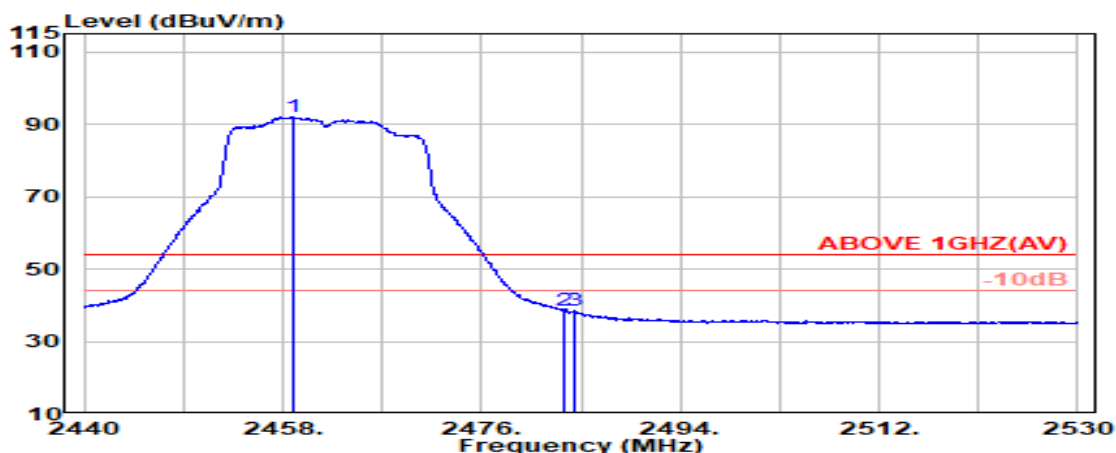


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.850	28.42	6.13	39.92	97.31	91.94	---	---	Average
2483.500	28.47	6.17	39.92	43.79	38.50	54.00	15.50	Average
2484.500	28.47	6.17	39.92	43.64	38.36	54.00	15.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

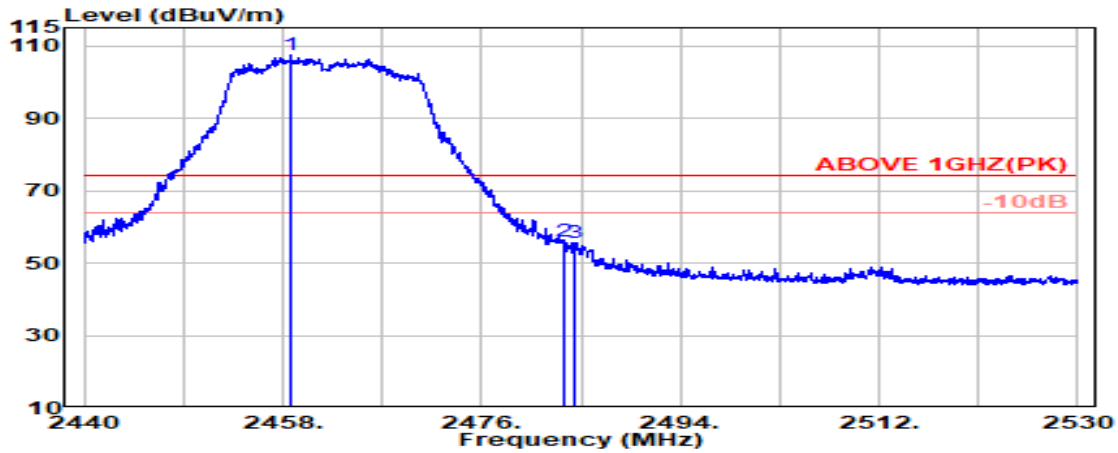

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.42	6.13	39.92	112.68	107.31	---	---	Peak
2483.500	28.47	6.17	39.92	61.13	55.84	74.00	18.16	Peak
2484.500	28.47	6.17	39.92	60.91	55.62	74.00	18.38	Peak

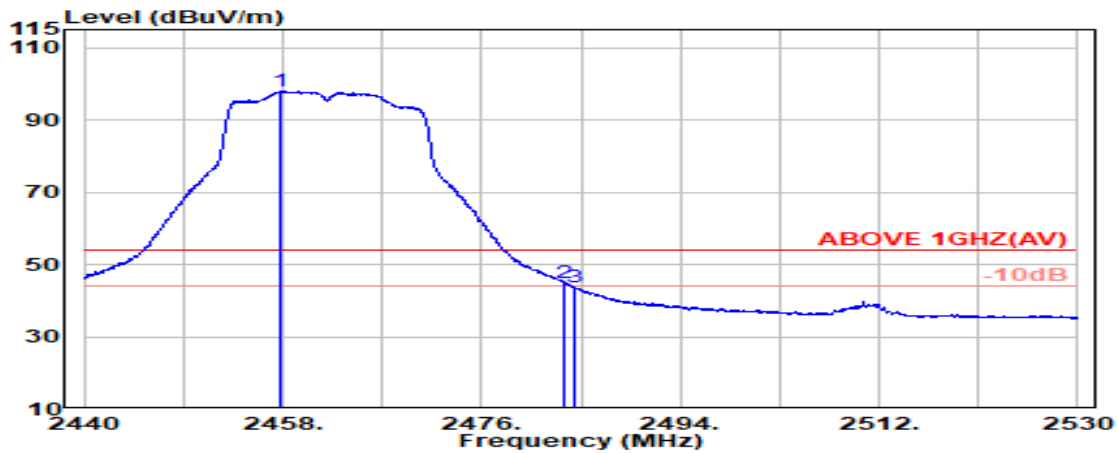


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.850	28.42	6.13	39.92	103.26	97.88	---	---	Average
2483.500	28.47	6.17	39.92	50.30	45.01	54.00	8.99	Average
2484.500	28.47	6.17	39.92	48.84	43.55	54.00	10.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

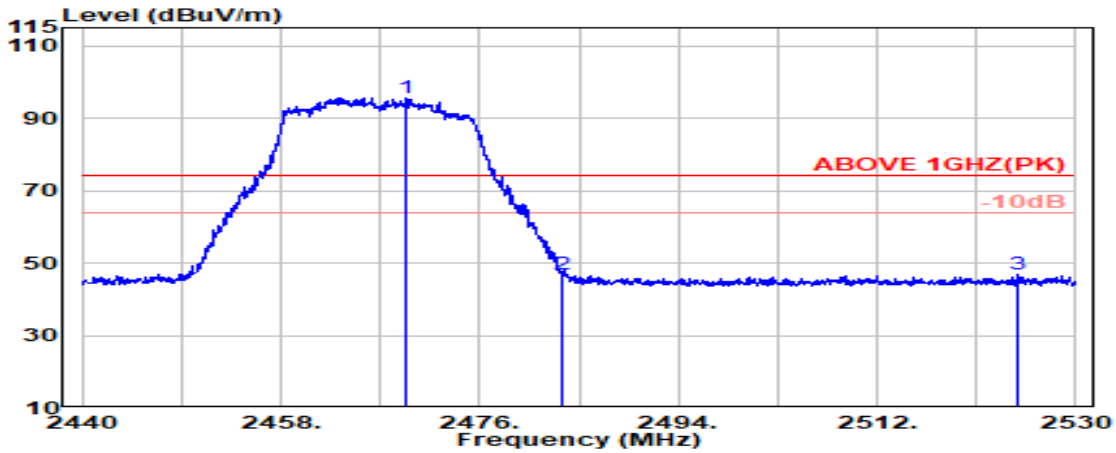

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	39.92	101.03	95.70	---	---	Peak
2483.500	28.47	6.17	39.92	52.27	46.98	74.00	27.02	Peak
2524.800	28.55	6.22	39.93	51.81	46.65	74.00	27.35	Peak

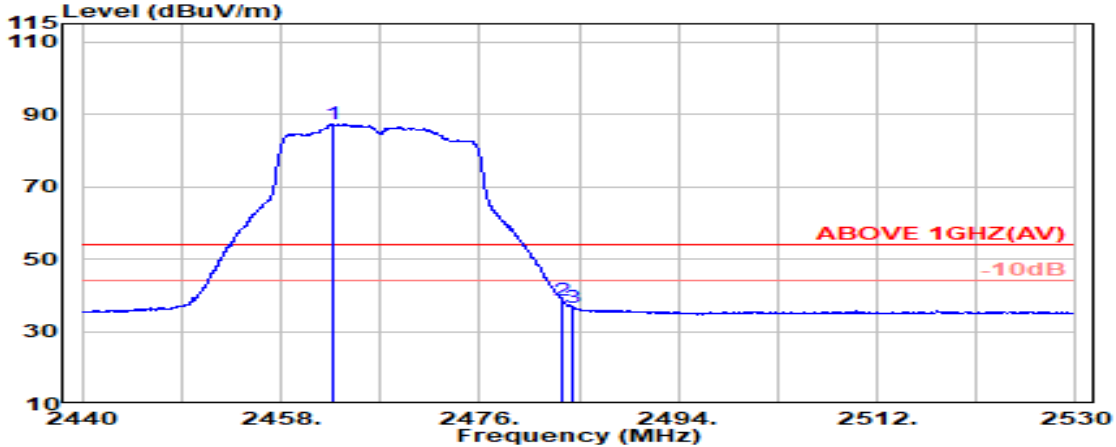


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	28.43	6.14	39.92	92.65	87.29	---	---	Average
2483.500	28.47	6.17	39.92	43.86	38.57	54.00	15.43	Average
2484.500	28.47	6.17	39.92	41.89	36.61	54.00	17.39	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

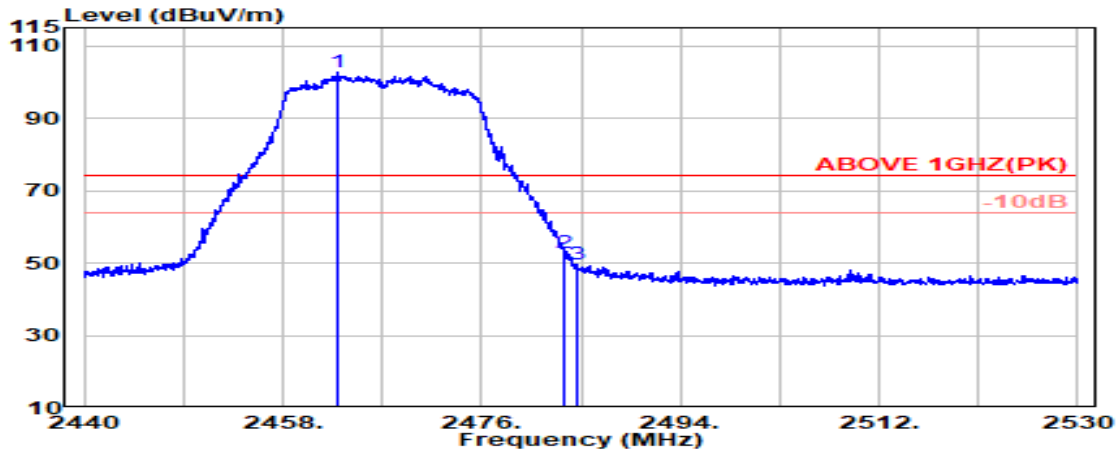

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	28.43	6.14	39.92	107.97	102.61	---	---	Peak
2483.500	28.47	6.17	39.92	57.96	52.68	74.00	21.32	Peak
2484.550	28.47	6.17	39.92	54.74	49.45	74.00	24.55	Peak

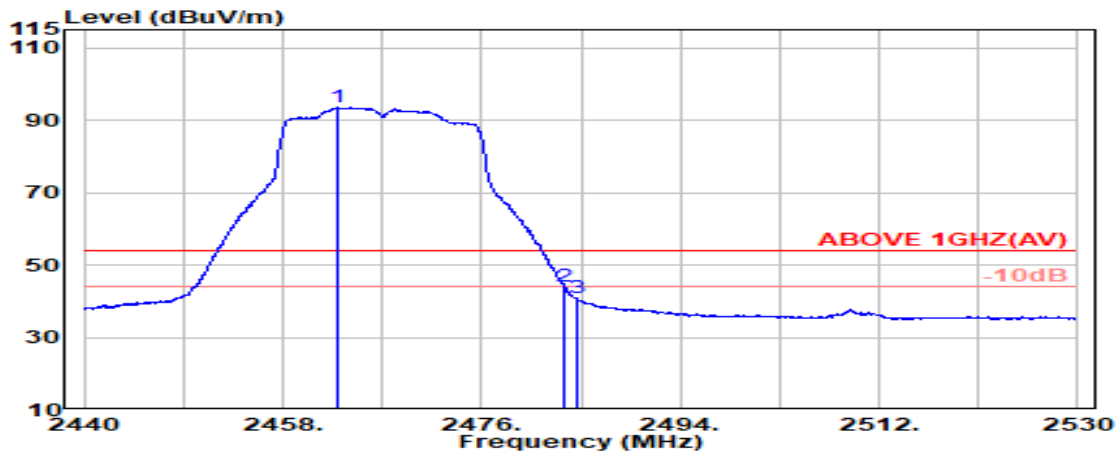


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.43	6.14	39.92	99.06	93.70	---	---	Average
2483.500	28.47	6.17	39.92	49.38	44.09	54.00	9.91	Average
2484.600	28.47	6.17	39.92	46.30	41.01	54.00	12.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

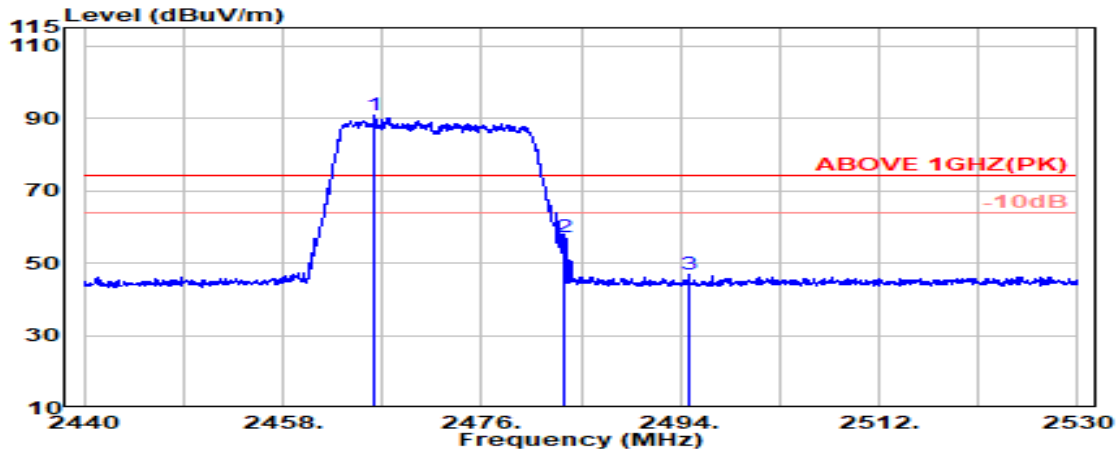

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.43	6.14	39.92	96.18	90.84	---	---	Peak
2483.500	28.47	6.17	39.92	62.38	57.09	74.00	16.91	Peak
2494.750	28.49	6.18	39.92	52.09	46.85	74.00	27.15	Peak

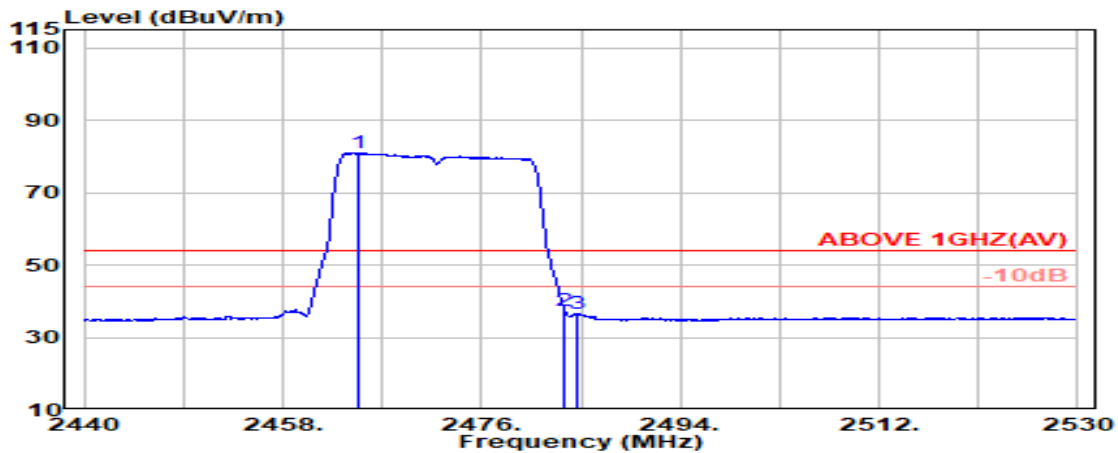


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.850	28.43	6.14	39.92	86.37	81.02	---	---	Average
2483.500	28.47	6.17	39.92	42.80	37.51	54.00	16.49	Average
2484.650	28.47	6.17	39.92	41.70	36.41	54.00	17.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

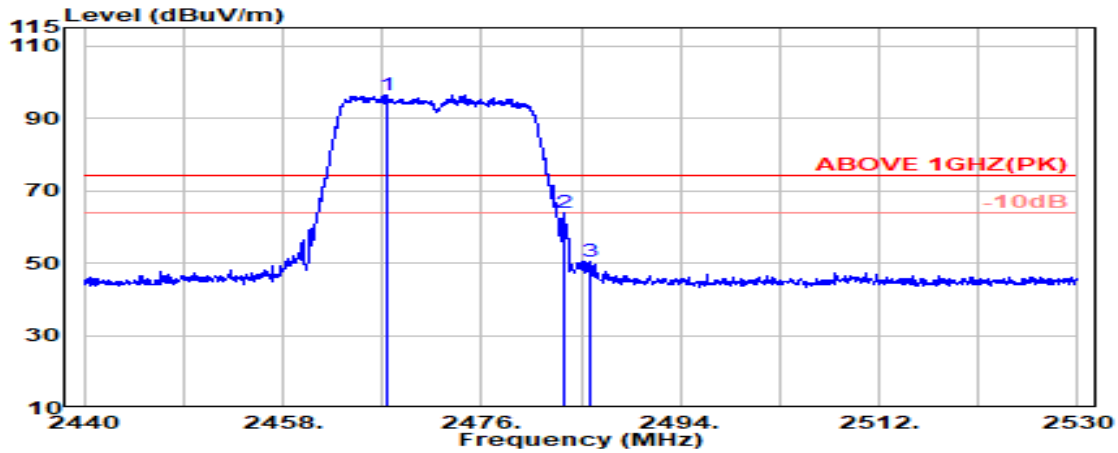

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.450	28.44	6.14	39.92	101.87	96.53	---	---	Peak
2483.500	28.47	6.17	39.92	69.00	63.72	74.00	10.28	Peak
2485.900	28.47	6.17	39.92	55.65	50.37	74.00	23.63	Peak

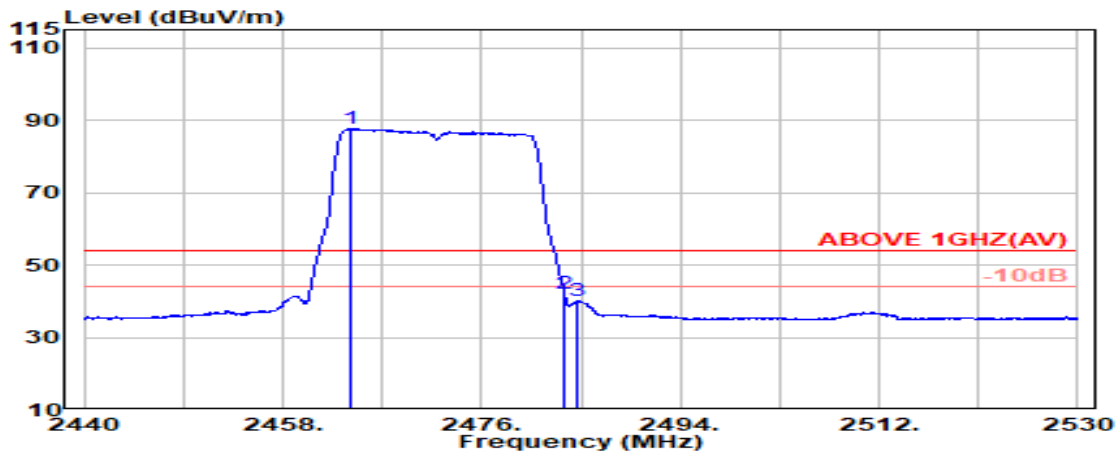


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.050	28.43	6.14	39.92	92.97	87.61	---	---	Average
2483.500	28.47	6.17	39.92	47.47	42.19	54.00	11.81	Average
2484.750	28.47	6.17	39.92	45.46	40.18	54.00	13.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

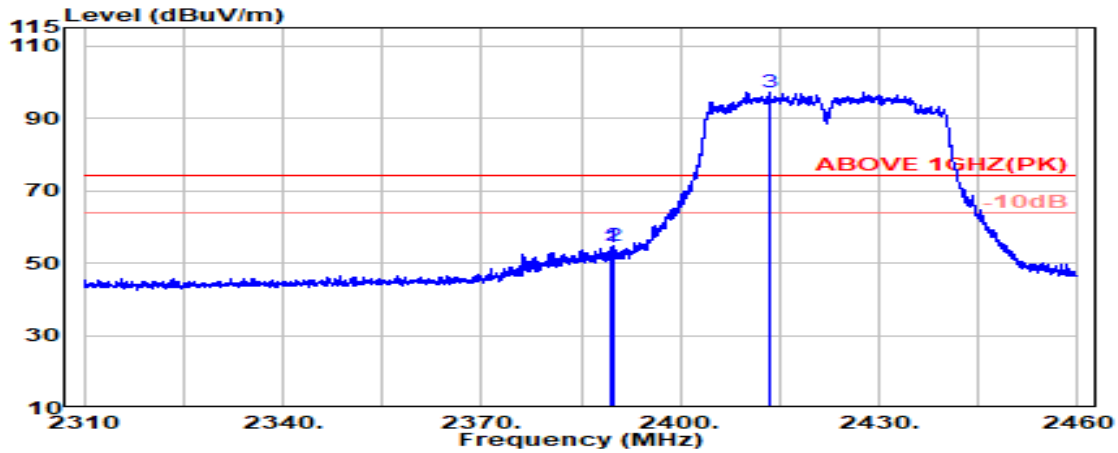

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	60.23	54.53	74.00	19.47	Peak
2390.000	28.20	6.03	39.93	60.35	54.65	74.00	19.35	Peak
@ 2413.550	28.25	6.07	39.93	102.76	97.15	---	---	Peak

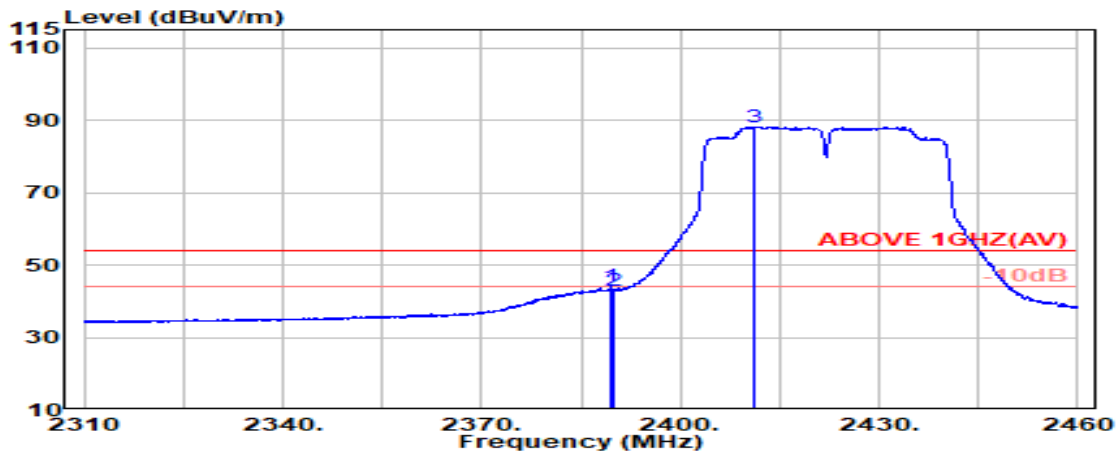


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	49.73	44.03	54.00	9.97	Average
2390.000	28.20	6.03	39.93	48.61	42.92	54.00	11.08	Average
@ 2411.200	28.25	6.07	39.93	93.78	88.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

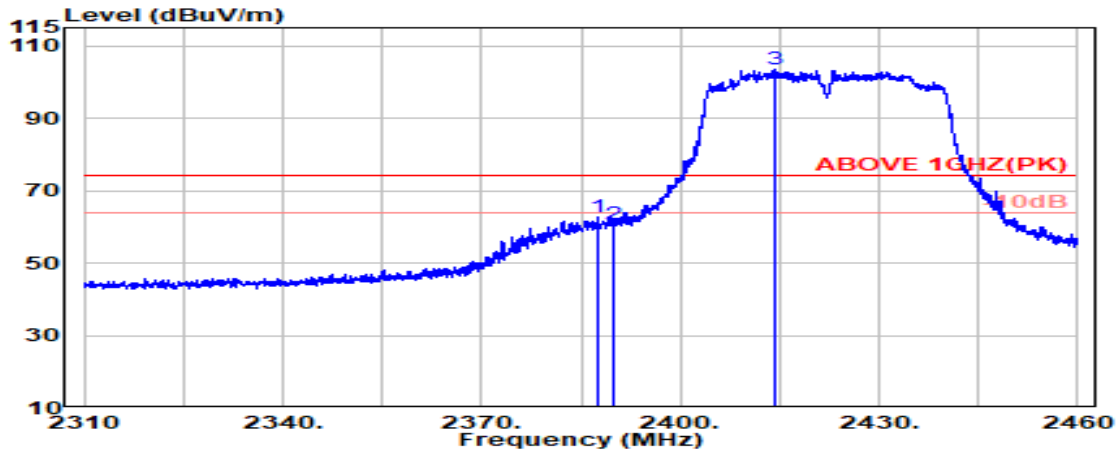

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.20	6.03	39.93	68.43	62.73	74.00	11.27	Peak
2390.000	28.20	6.03	39.93	66.37	60.67	74.00	13.33	Peak
@ 2414.100	28.26	6.07	39.93	109.23	103.63	---	---	Peak

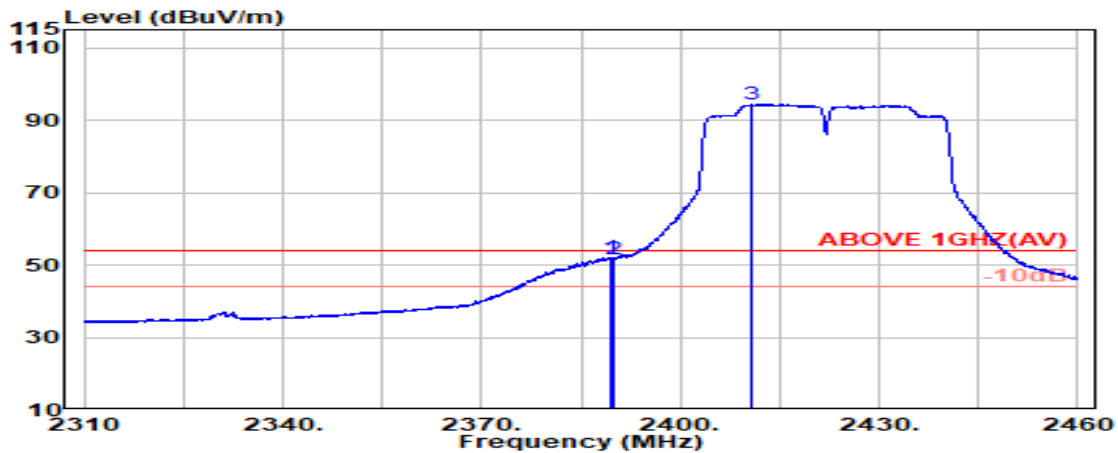


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	57.81	52.12	54.00	1.88	Average
2390.000	28.20	6.03	39.93	57.21	51.52	54.00	2.48	Average
@ 2410.750	28.24	6.06	39.93	99.90	94.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

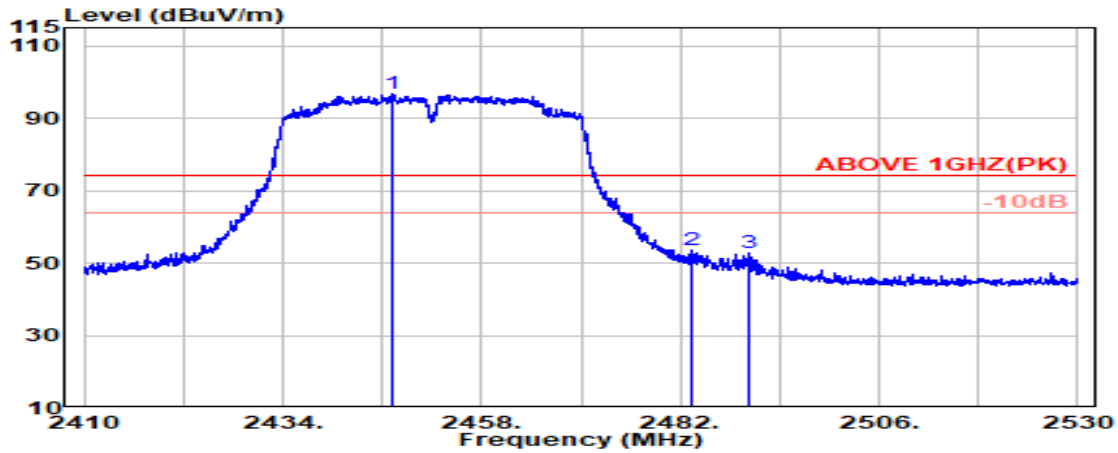

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.200	28.39	6.12	39.92	102.18	96.76	---	---	Peak
2483.500	28.47	6.17	39.92	58.82	53.54	74.00	20.46	Peak
2490.350	28.48	6.18	39.92	58.20	52.94	74.00	21.06	Peak

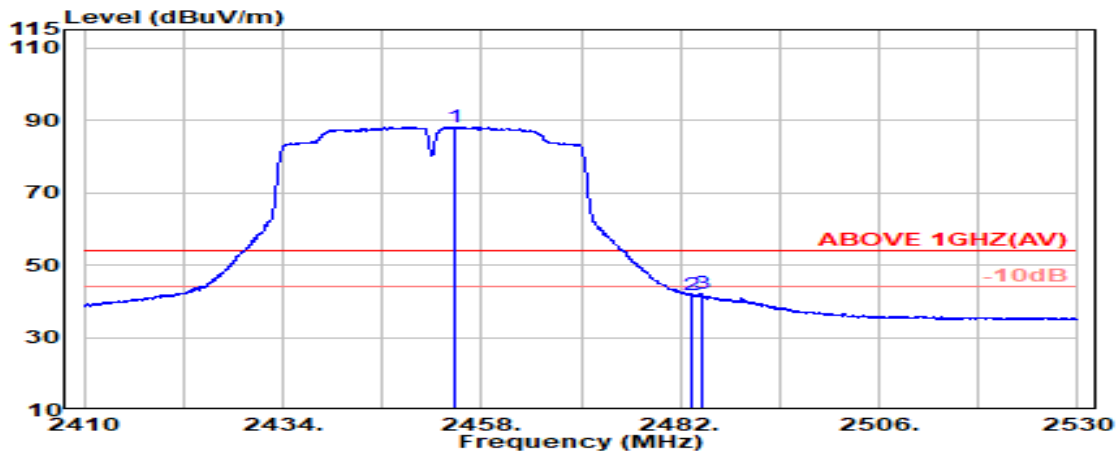


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.750	28.41	6.13	39.92	93.51	88.12	---	---	Average
2483.500	28.47	6.17	39.92	46.94	41.65	54.00	12.35	Average
2484.550	28.47	6.17	39.92	47.28	42.00	54.00	12.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

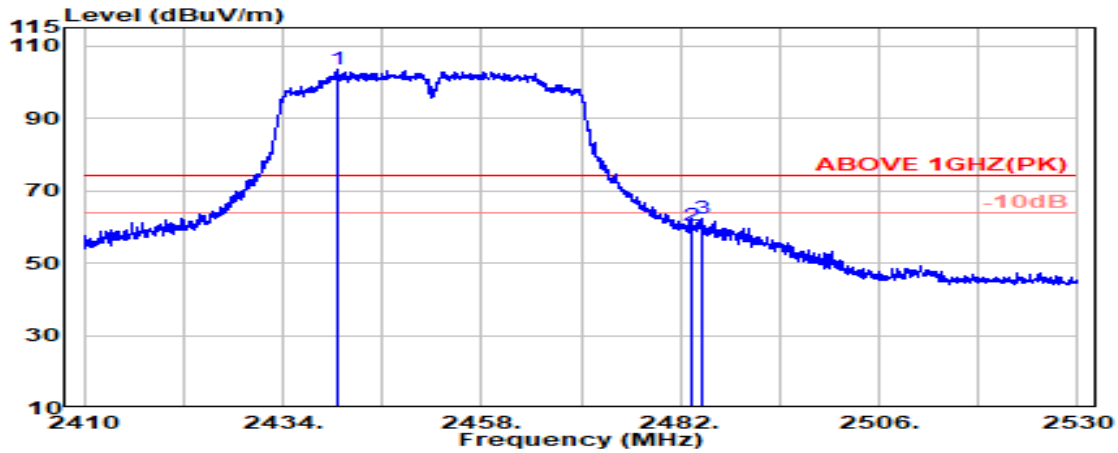

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.550	28.36	6.11	39.93	108.87	103.41	---	---	Peak
2483.500	28.47	6.17	39.92	65.57	60.28	74.00	13.72	Peak
2484.650	28.47	6.17	39.92	67.55	62.26	74.00	11.74	Peak

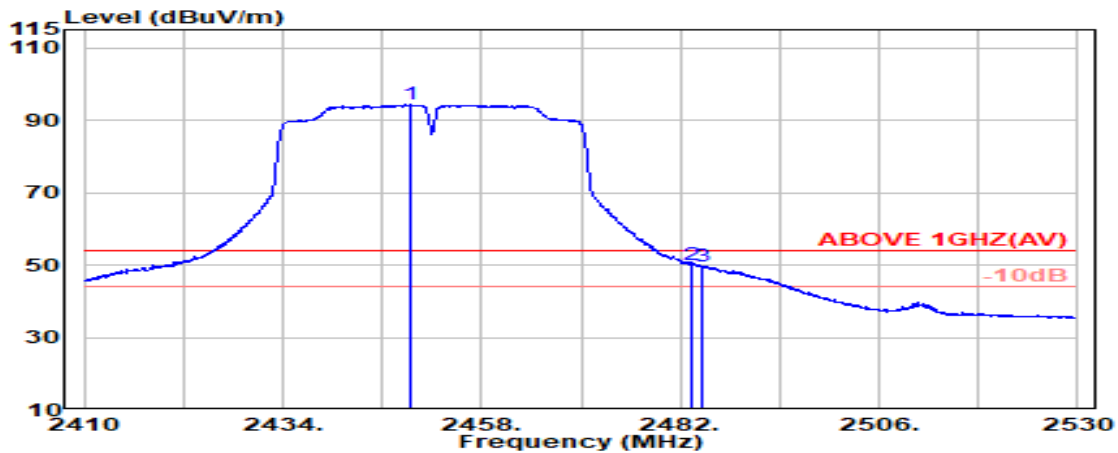


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.300	28.40	6.12	39.92	99.62	94.21	---	---	Average
2483.500	28.47	6.17	39.92	55.48	50.19	54.00	3.81	Average
2484.700	28.47	6.17	39.92	55.03	49.74	54.00	4.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

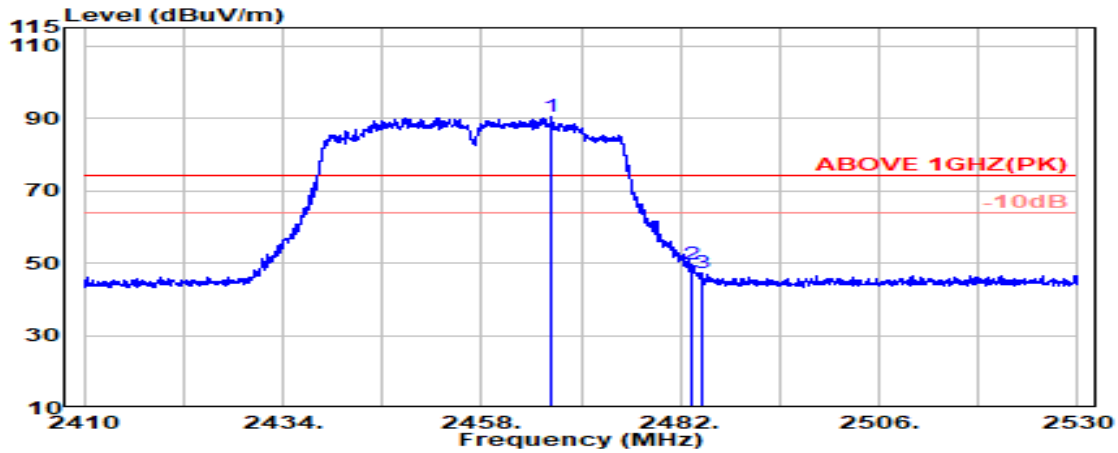

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.450	28.43	6.14	39.92	95.59	90.25	---	---	Peak
2483.500	28.47	6.17	39.92	54.88	49.59	74.00	24.41	Peak
2484.650	28.47	6.17	39.92	52.41	47.13	74.00	26.87	Peak

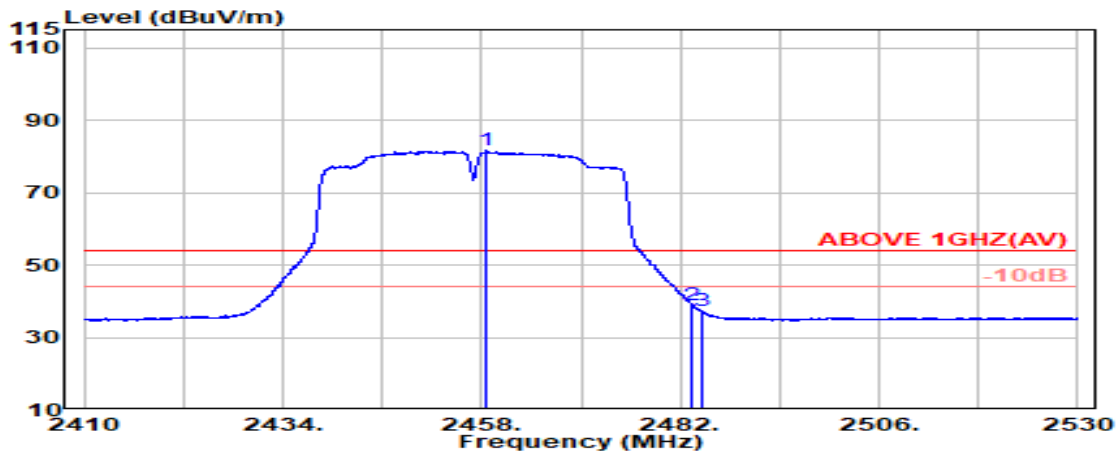


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.450	28.42	6.13	39.92	86.91	81.54	---	---	Average
2483.500	28.47	6.17	39.92	44.24	38.95	54.00	15.05	Average
2484.500	28.47	6.17	39.92	42.64	37.36	54.00	16.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

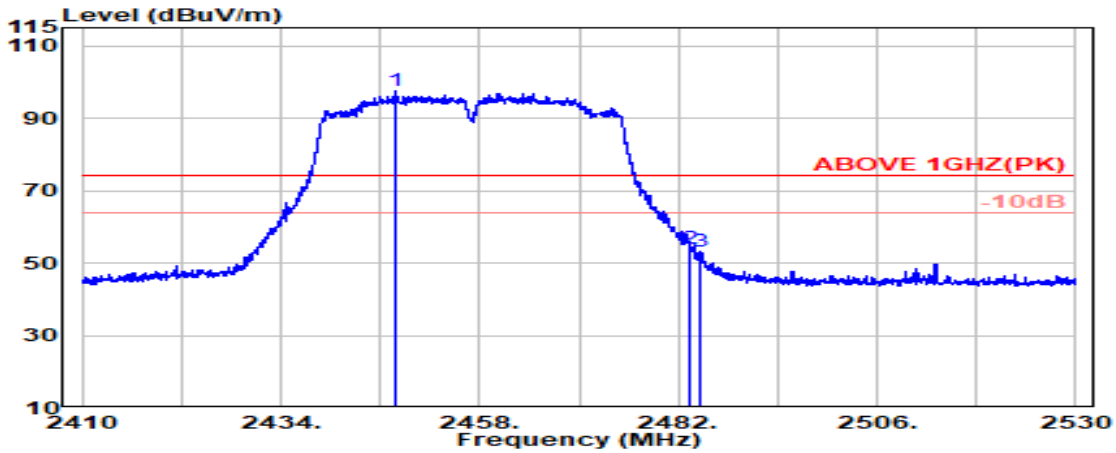

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.900	28.39	6.12	39.92	102.92	97.51	---	---	Peak
2483.500	28.47	6.17	39.92	59.23	53.95	74.00	20.05	Peak
2484.750	28.47	6.17	39.92	58.41	53.13	74.00	20.87	Peak

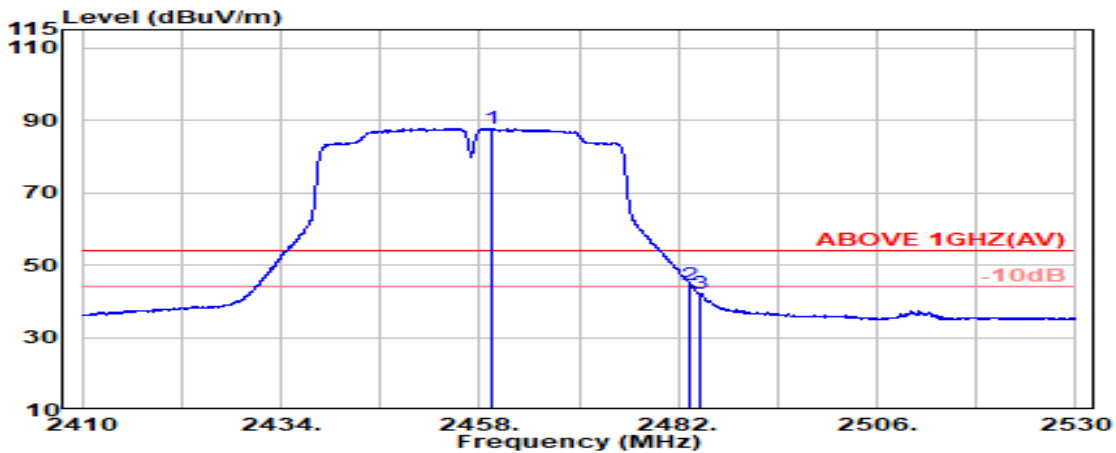


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	28.42	6.13	39.92	93.08	87.71	---	---	Average
2483.500	28.47	6.17	39.92	49.83	44.54	54.00	9.46	Average
2484.500	28.47	6.17	39.92	47.35	42.07	54.00	11.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

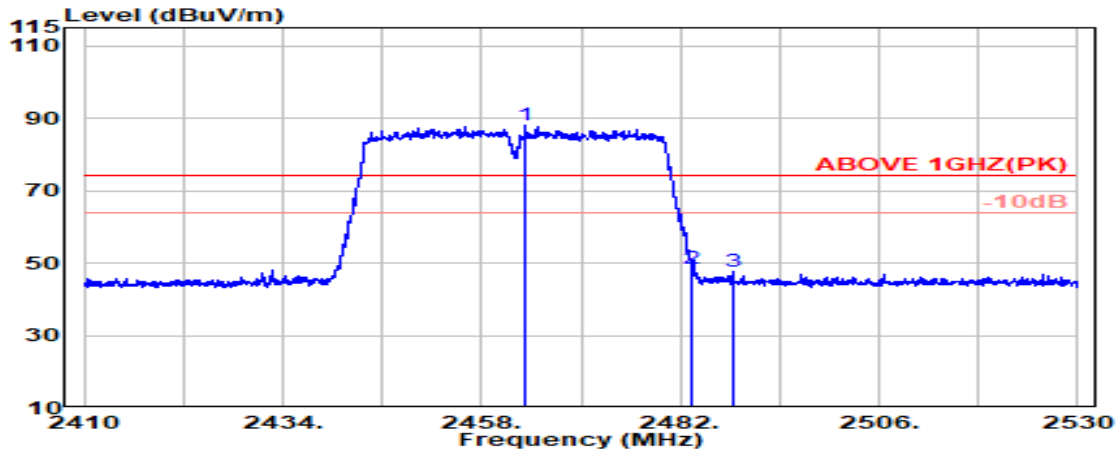

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.43	6.14	39.92	93.54	88.18	---	---	Peak
2483.500	28.47	6.17	39.92	53.63	48.34	74.00	25.66	Peak
2488.400	28.48	6.17	39.92	52.96	47.68	74.00	26.32	Peak

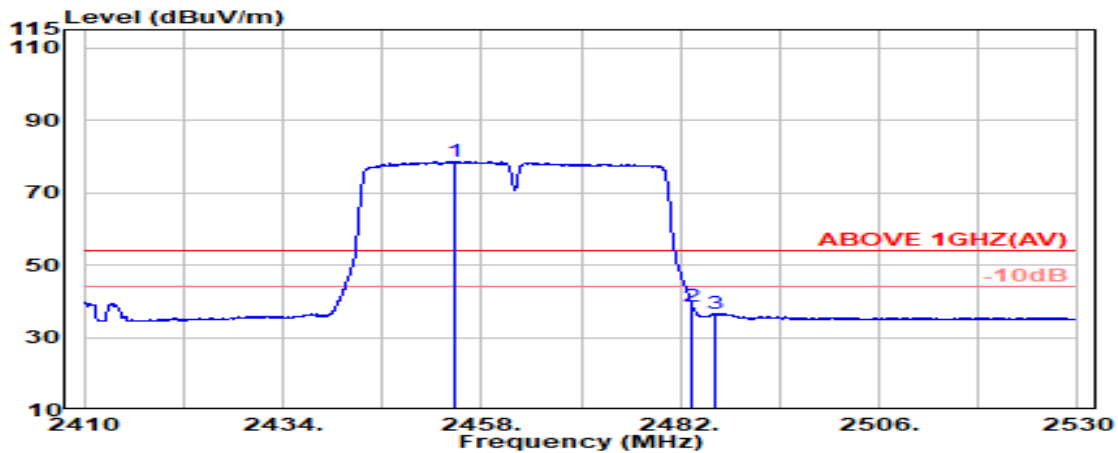


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	28.41	6.13	39.92	84.04	78.65	---	---	Average
2483.500	28.47	6.17	39.92	43.89	38.60	54.00	15.40	Average
2486.300	28.47	6.17	39.92	41.95	36.67	54.00	17.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

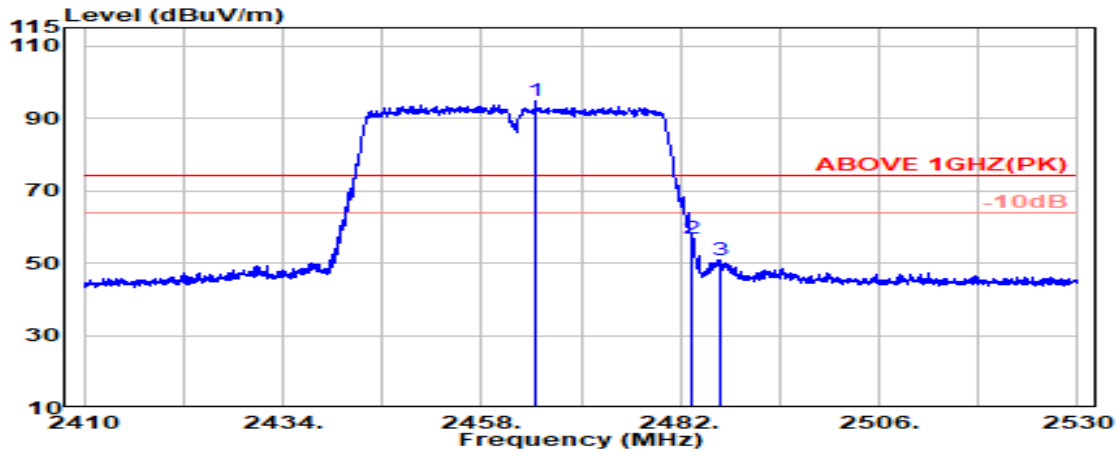

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.43	6.14	39.92	100.18	94.82	---	---	Peak
2483.500	28.47	6.17	39.92	61.87	56.58	74.00	17.42	Peak
2486.800	28.47	6.17	39.92	56.20	50.92	74.00	23.08	Peak

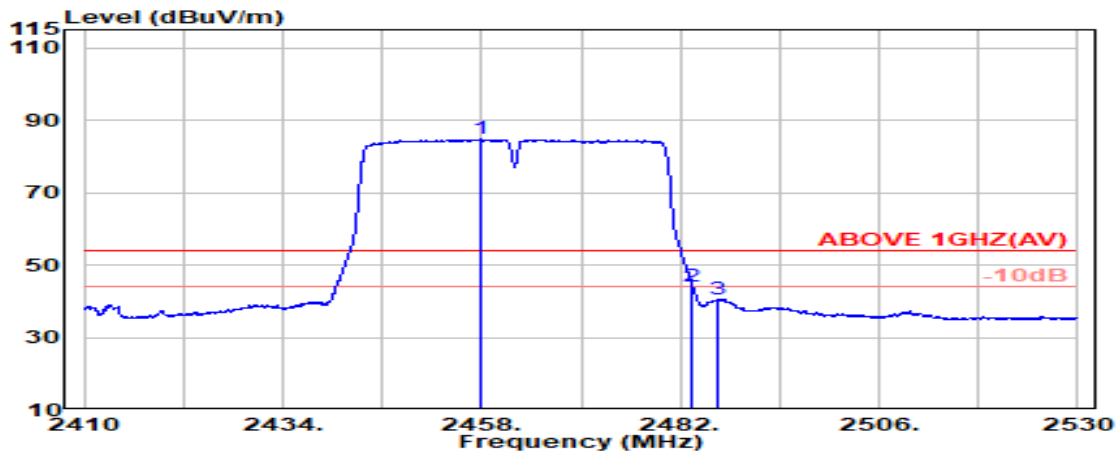


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.900	28.42	6.13	39.92	90.13	84.75	---	---	Average
2483.500	28.47	6.17	39.92	49.29	44.00	54.00	10.00	Average
2486.600	28.47	6.17	39.92	45.80	40.52	54.00	13.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

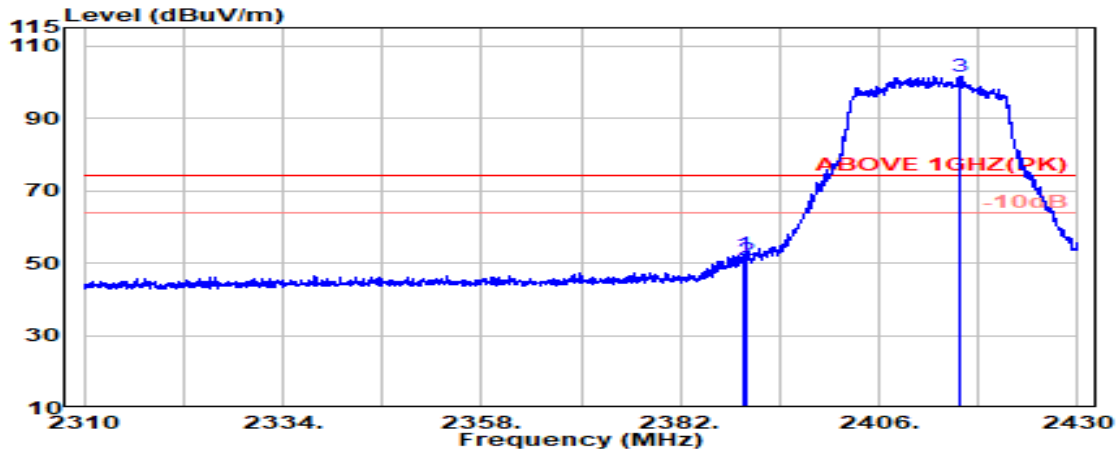

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	57.95	52.25	74.00	21.75	Peak
2390.000	28.20	6.03	39.93	56.68	50.98	74.00	23.02	Peak
@ 2415.650	28.26	6.07	39.93	107.26	101.67	---	---	Peak

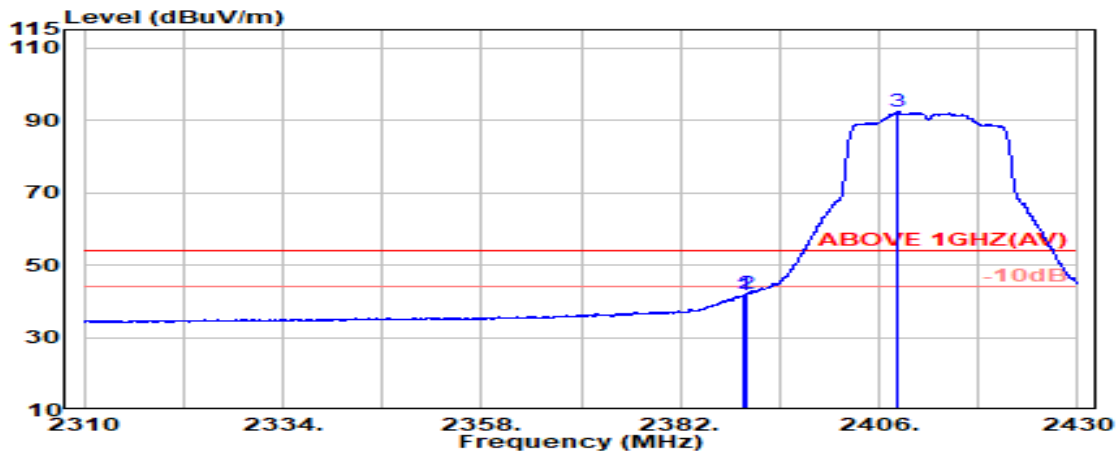


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	6.03	39.93	47.50	41.80	54.00	12.20	Average
2390.000	28.20	6.03	39.93	47.80	42.10	54.00	11.90	Average
@ 2408.350	28.23	6.06	39.93	98.01	92.38	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

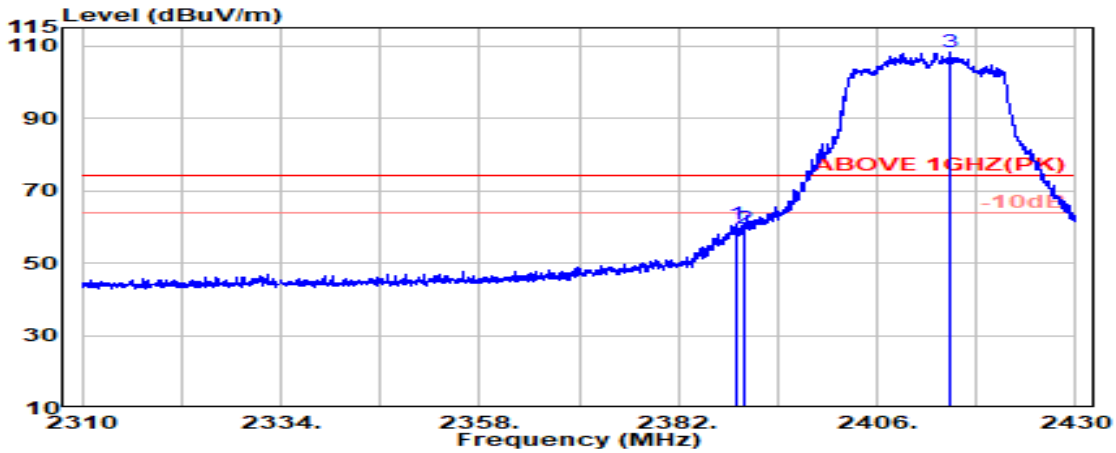

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	66.32	60.62	74.00	13.38	Peak
2390.000	28.20	6.03	39.93	65.27	59.57	74.00	14.43	Peak
@ 2414.800	28.26	6.07	39.93	113.76	108.16	---	---	Peak

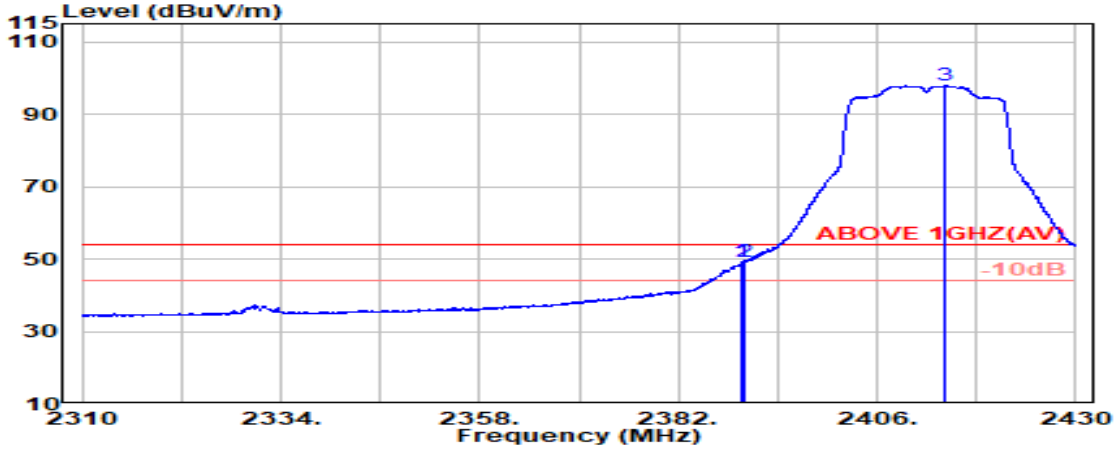


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	54.74	49.04	54.00	4.96	Average
2390.000	28.20	6.03	39.93	54.78	49.08	54.00	4.92	Average
@ 2414.300	28.26	6.07	39.93	103.53	97.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

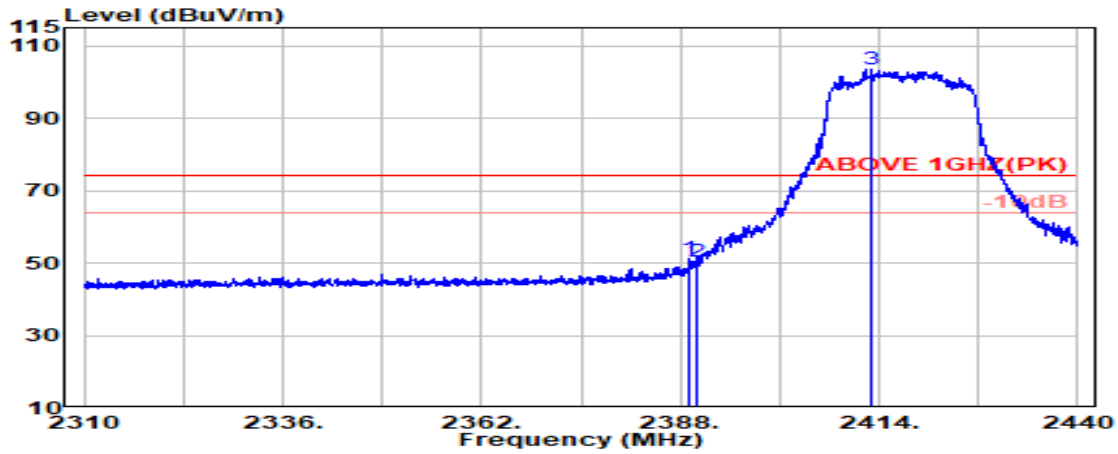

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.133	28.20	6.03	39.93	57.05	51.35	74.00	22.65	Peak
2390.000	28.20	6.03	39.93	55.98	50.29	74.00	23.71	Peak
@ 2413.083	28.25	6.07	39.93	109.13	103.52	---	---	Peak

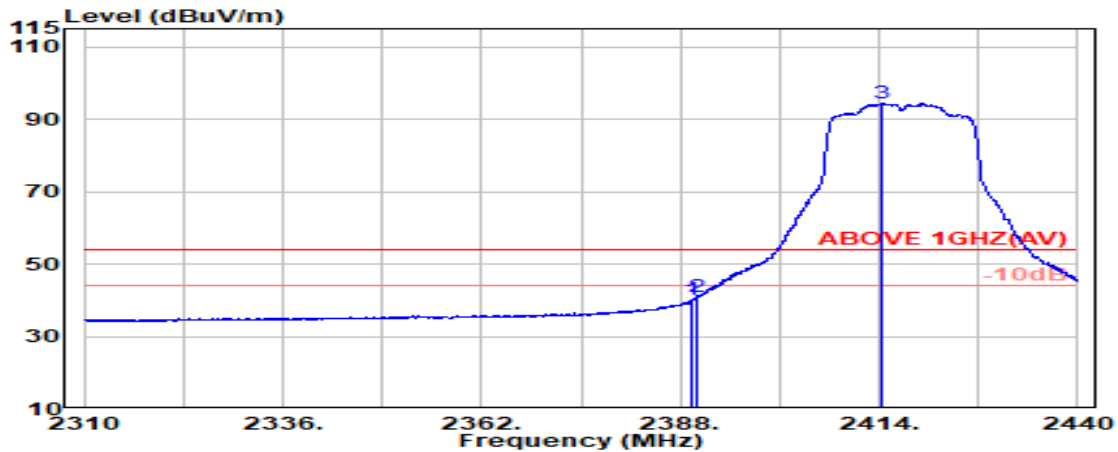


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.564	28.20	6.03	39.93	45.78	40.09	54.00	13.91	Average
2390.000	28.20	6.03	39.93	46.53	40.84	54.00	13.16	Average
@ 2414.486	28.26	6.07	39.93	99.89	94.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

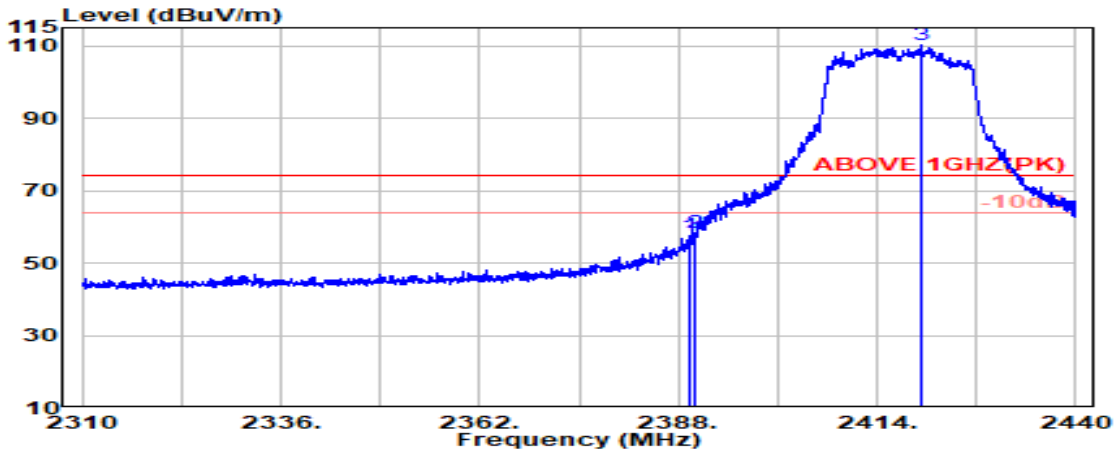

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.403	28.20	6.03	39.93	63.29	57.59	74.00	16.41	Peak
2390.000	28.20	6.03	39.93	64.07	58.37	74.00	15.63	Peak
@ 2419.826	28.28	6.08	39.93	115.94	110.37	---	---	Peak

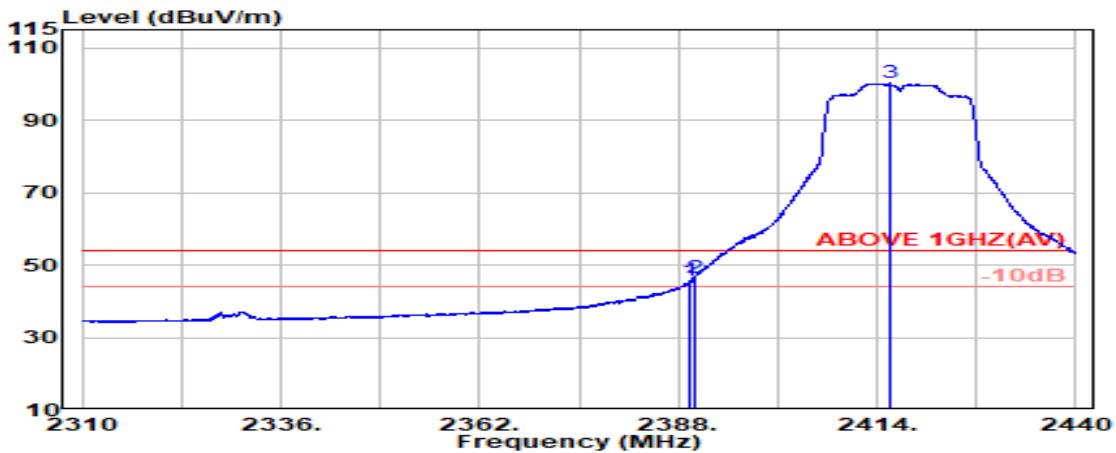


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.564	28.20	6.03	39.93	51.44	45.74	54.00	8.26	Average
2390.000	28.20	6.03	39.93	52.06	46.36	54.00	7.64	Average
@ 2415.672	28.26	6.07	39.93	105.74	100.15	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

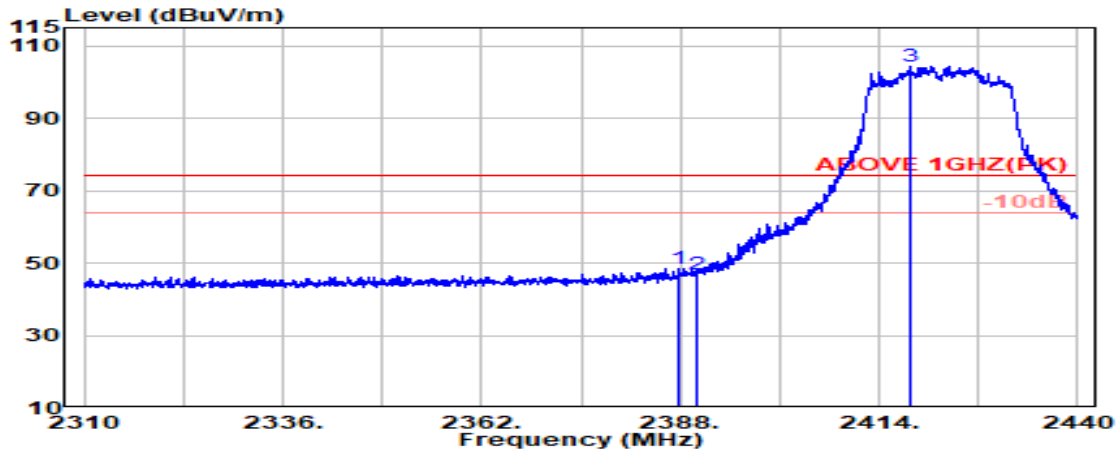

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.892	28.20	6.03	39.93	54.25	48.55	74.00	25.45	Peak
2390.000	28.20	6.03	39.93	52.59	46.89	74.00	27.11	Peak
@ 2418.100	28.27	6.08	39.93	110.08	104.50	---	---	Peak

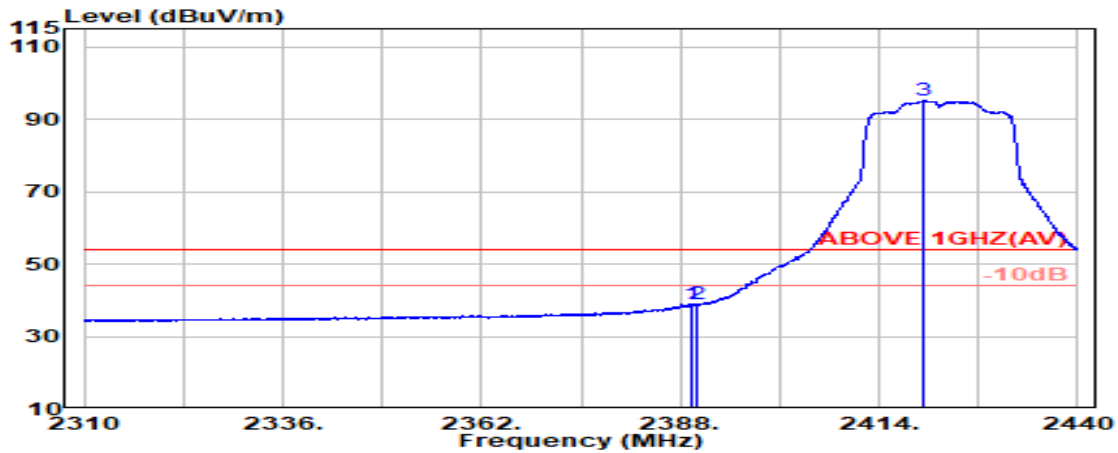


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.349	28.20	6.03	39.93	44.59	38.90	54.00	15.10	Average
2390.000	28.20	6.03	39.93	44.43	38.74	54.00	15.26	Average
@ 2419.934	28.28	6.08	39.93	100.64	95.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

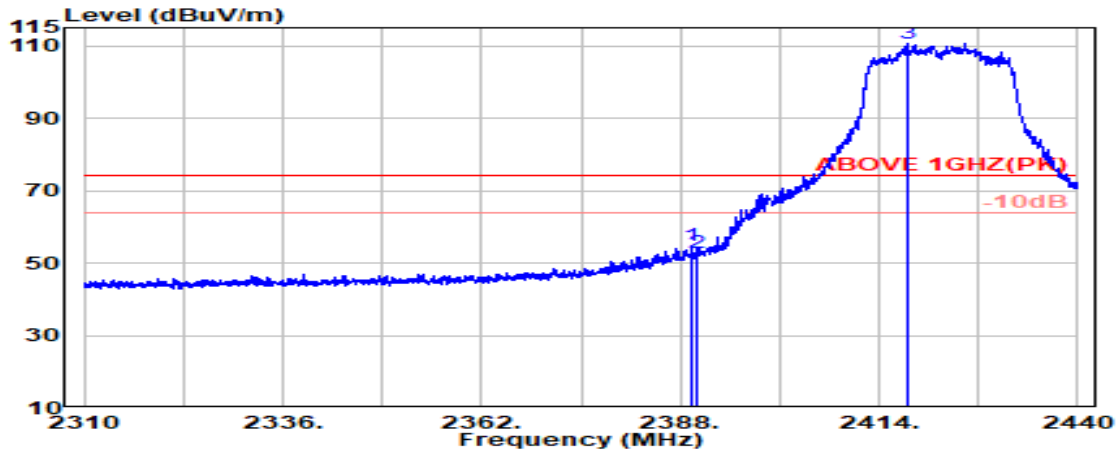

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.403	28.20	6.03	39.93	60.51	54.82	74.00	19.18	Peak
2390.000	28.20	6.03	39.93	58.60	52.90	74.00	21.10	Peak
@ 2417.668	28.27	6.07	39.93	116.22	110.64	---	---	Peak

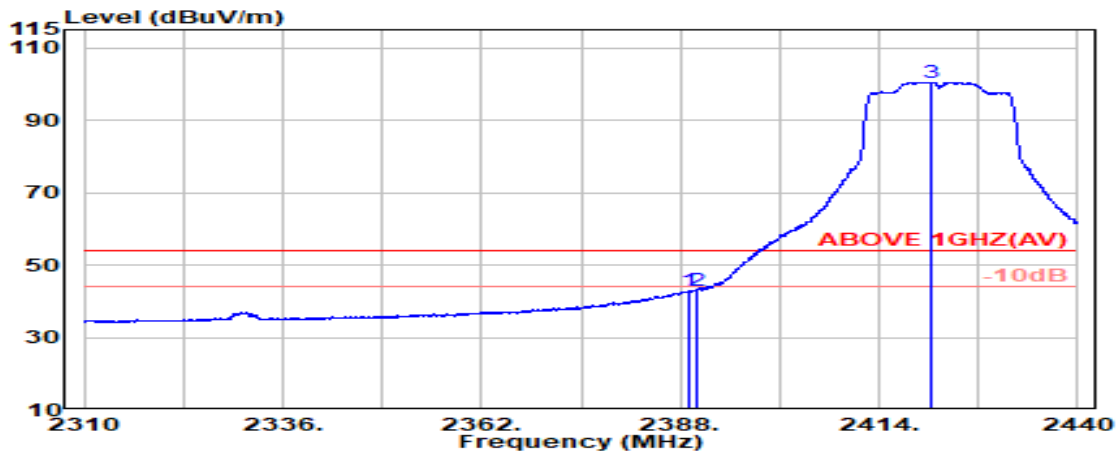


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.079	28.20	6.03	39.93	48.63	42.93	54.00	11.07	Average
2390.000	28.20	6.03	39.93	48.63	42.93	54.00	11.07	Average
@ 2420.905	28.28	6.08	39.93	106.07	100.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

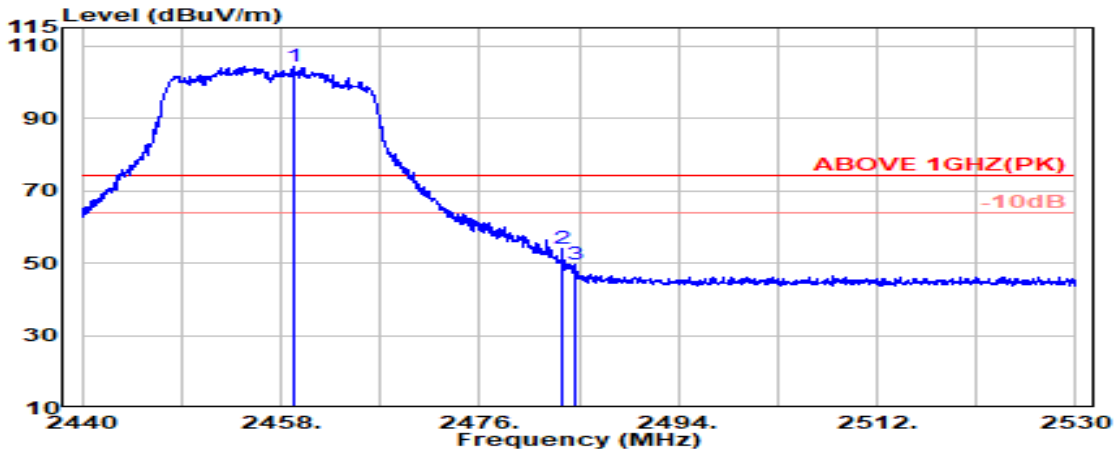

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.250	28.42	6.13	39.92	109.74	104.36	---	---	Peak
2483.500	28.47	6.17	39.92	59.44	54.15	74.00	19.85	Peak
2484.550	28.47	6.17	39.92	54.91	49.62	74.00	24.38	Peak

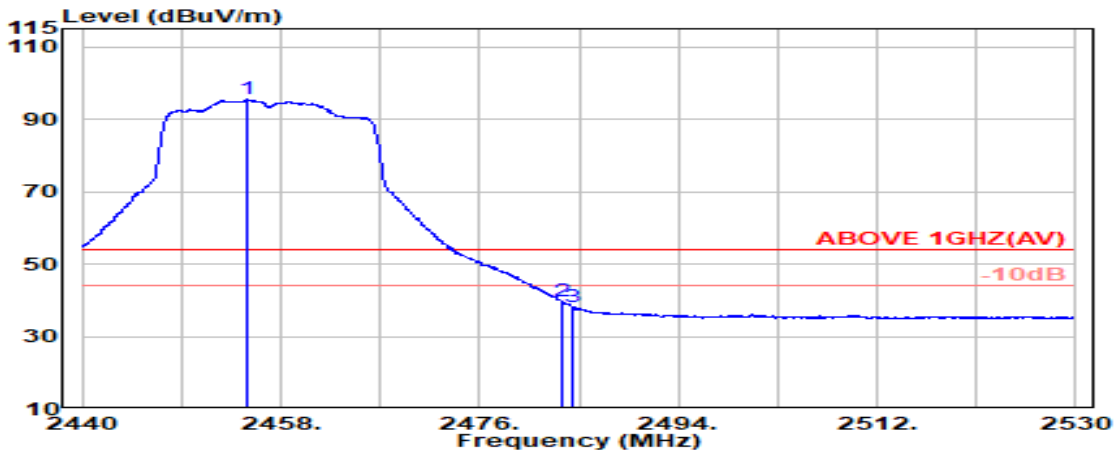


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.900	28.41	6.13	39.92	100.88	95.49	---	---	Average
2483.500	28.47	6.17	39.92	44.83	39.54	54.00	14.46	Average
2484.500	28.47	6.17	39.92	43.37	38.09	54.00	15.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

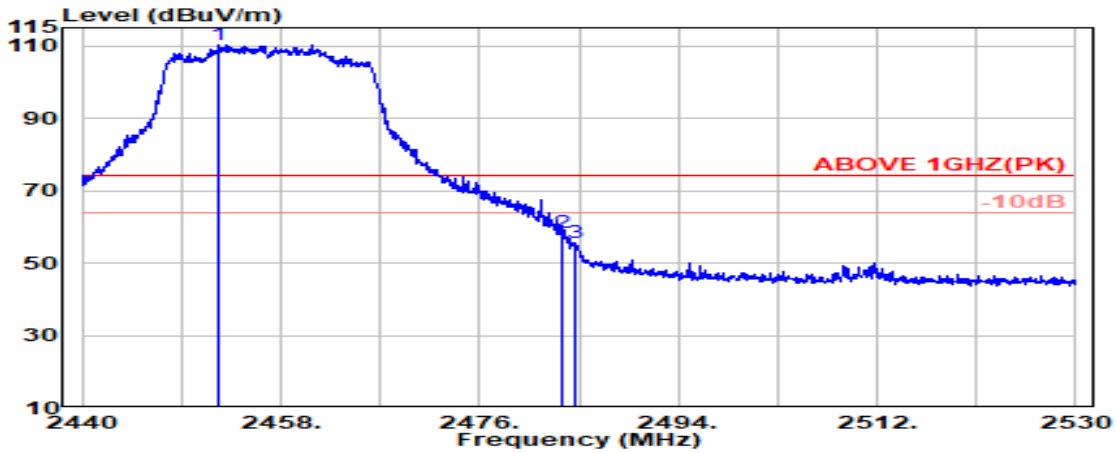

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.350	28.40	6.12	39.92	115.80	110.41	---	---	Peak
2483.500	28.47	6.17	39.92	63.65	58.36	74.00	15.64	Peak
2484.700	28.47	6.17	39.92	60.86	55.58	74.00	18.42	Peak

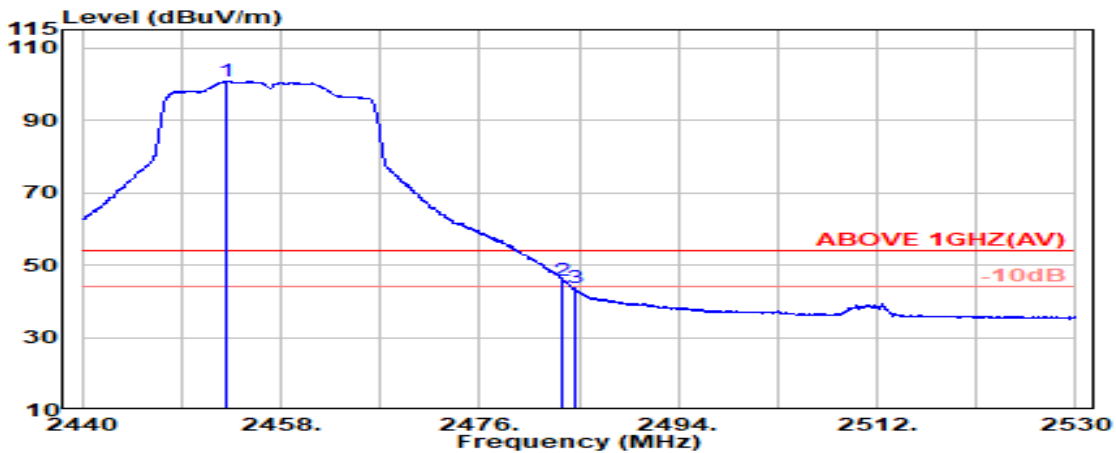


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	28.41	6.12	39.92	106.21	100.82	---	---	Average
2483.500	28.47	6.17	39.92	51.04	45.75	54.00	8.25	Average
2484.550	28.47	6.17	39.92	48.79	43.51	54.00	10.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

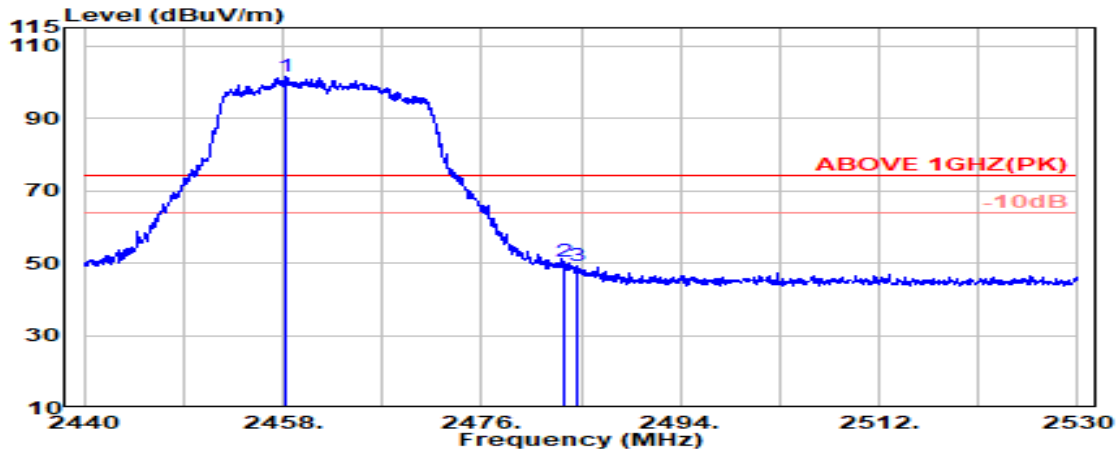

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.350	28.42	6.13	39.92	106.98	101.60	---	---	Peak
2483.500	28.47	6.17	39.92	55.88	50.59	74.00	23.41	Peak
2484.550	28.47	6.17	39.92	54.59	49.31	74.00	24.69	Peak

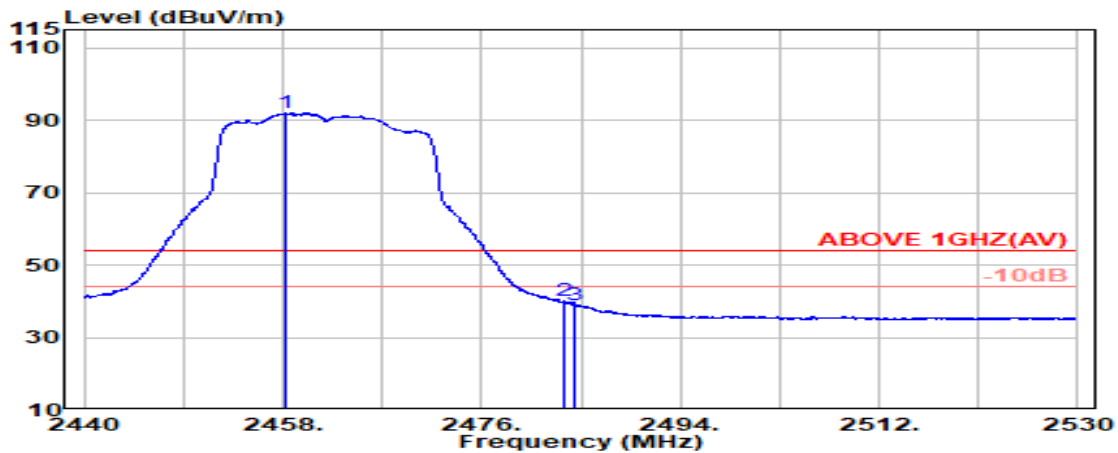


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.200	28.42	6.13	39.92	97.39	92.01	---	---	Average
2483.500	28.47	6.17	39.92	45.32	40.03	54.00	13.97	Average
2484.500	28.47	6.17	39.92	44.33	39.04	54.00	14.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

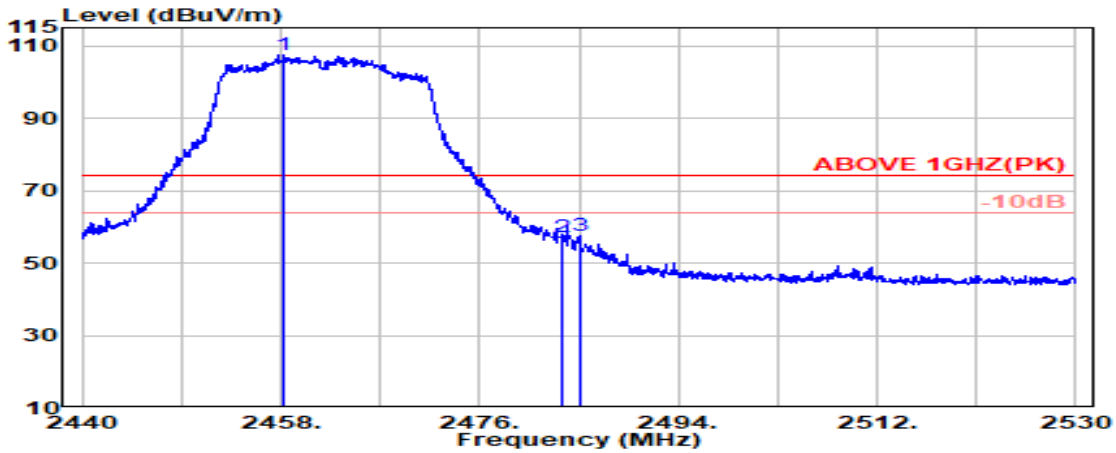

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.250	28.42	6.13	39.92	112.98	107.60	---	---	Peak
2483.500	28.47	6.17	39.92	62.46	57.17	74.00	16.83	Peak
2485.150	28.47	6.17	39.92	62.92	57.63	74.00	16.37	Peak

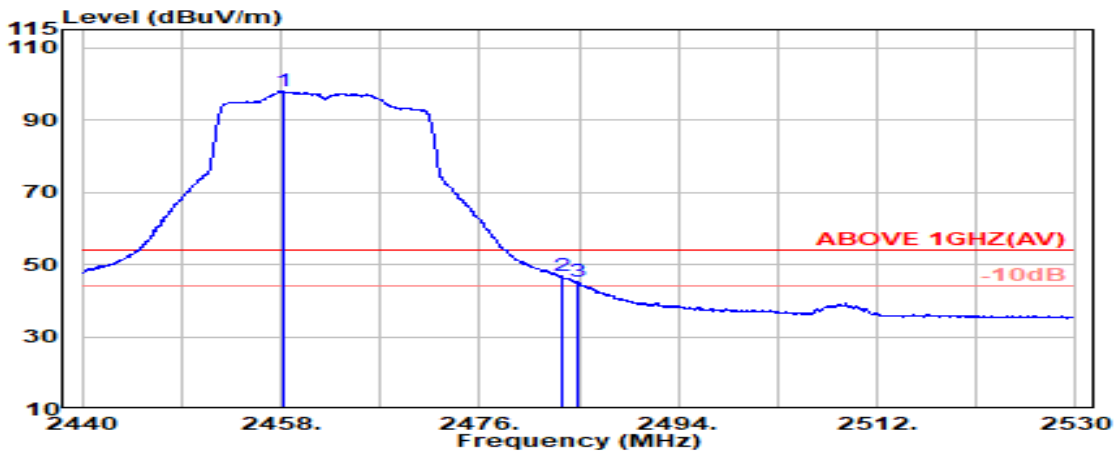


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	28.42	6.13	39.92	103.45	98.08	---	---	Average
2483.500	28.47	6.17	39.92	52.07	46.79	54.00	7.21	Average
2484.850	28.47	6.17	39.92	50.49	45.21	54.00	8.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

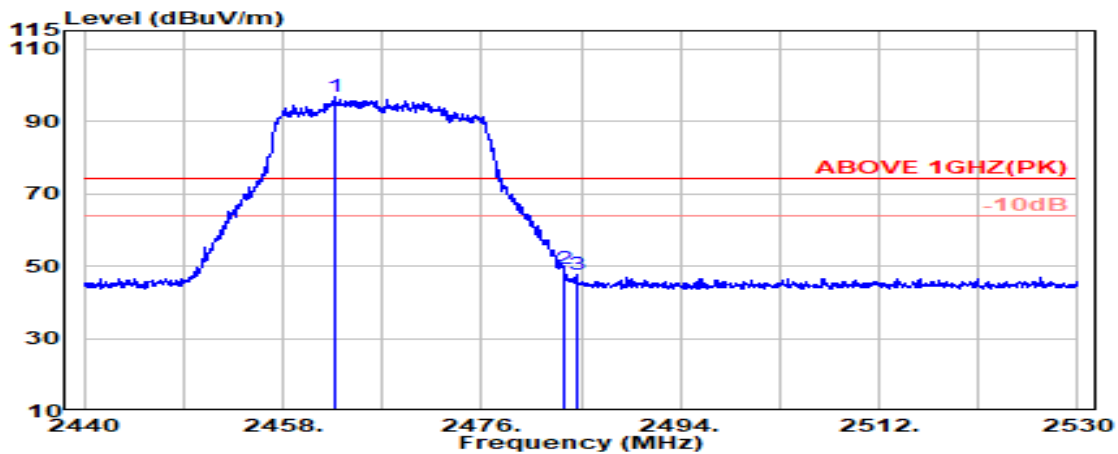

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	28.43	6.14	39.92	102.03	96.67	---	---	Peak
2483.500	28.47	6.17	39.92	54.59	49.30	74.00	24.70	Peak
2484.550	28.47	6.17	39.92	52.75	47.47	74.00	26.53	Peak

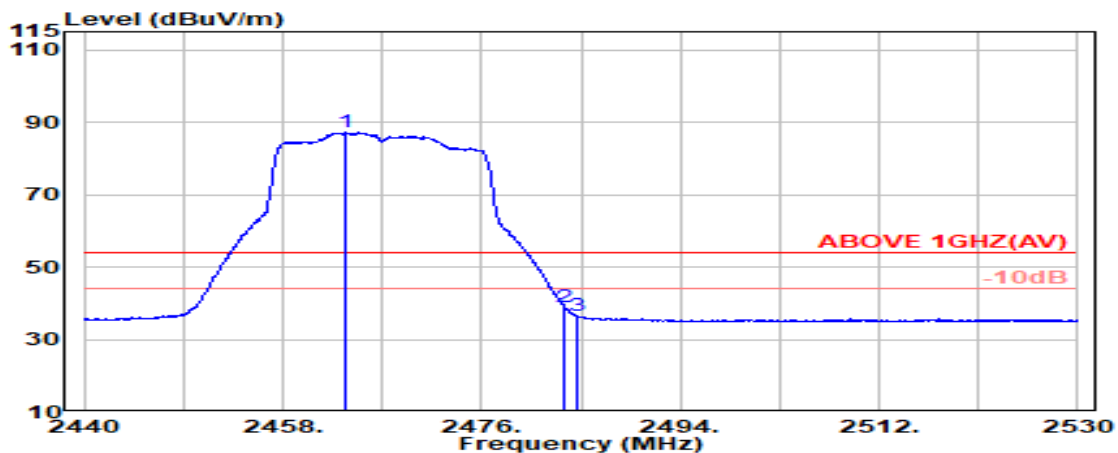


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.650	28.43	6.14	39.92	92.61	87.26	---	---	Average
2483.500	28.47	6.17	39.92	44.38	39.09	54.00	14.91	Average
2484.600	28.47	6.17	39.92	42.01	36.72	54.00	17.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

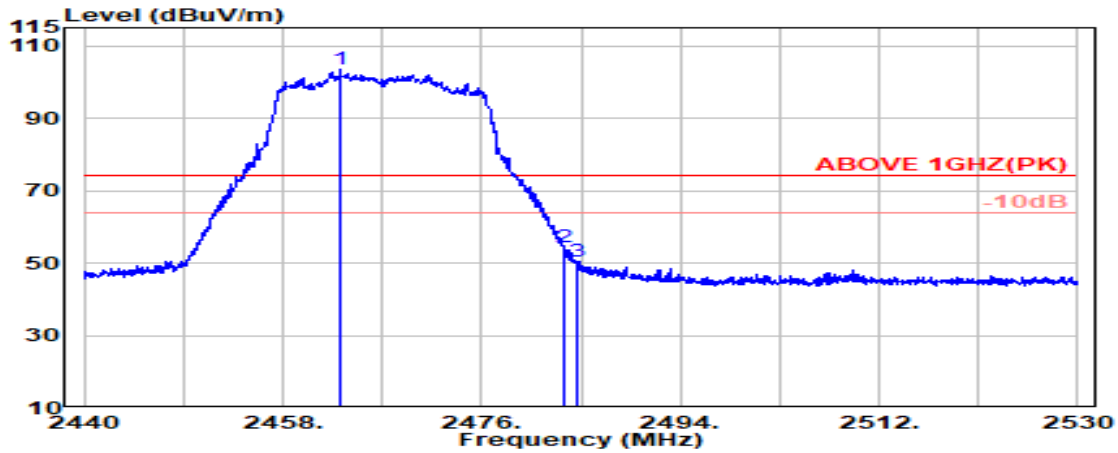

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.43	6.14	39.92	108.78	103.42	---	---	Peak
2483.500	28.47	6.17	39.92	59.71	54.42	74.00	19.58	Peak
2484.700	28.47	6.17	39.92	55.61	50.33	74.00	23.67	Peak

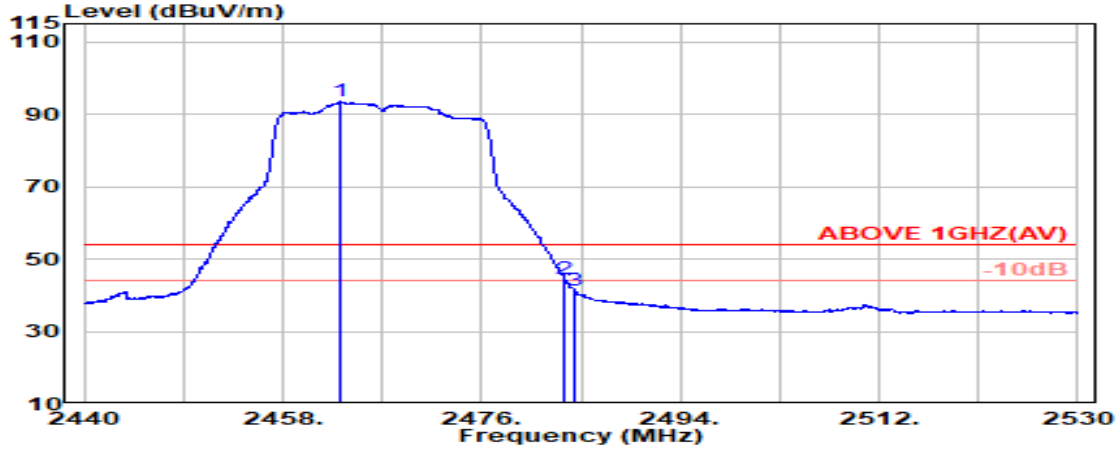


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.43	6.14	39.92	98.82	93.46	---	---	Average
2483.500	28.47	6.17	39.92	49.70	44.41	54.00	9.59	Average
2484.500	28.47	6.17	39.92	46.48	41.19	54.00	12.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

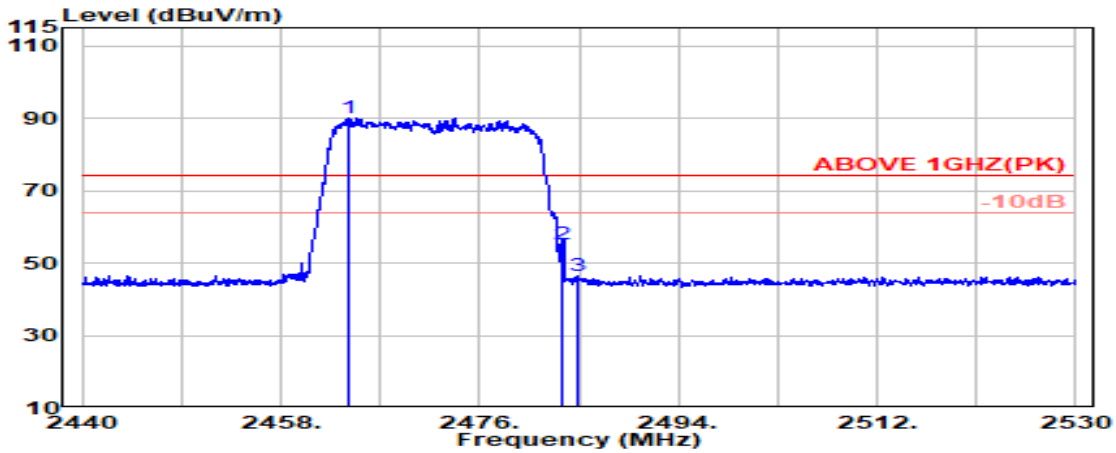

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	39.92	95.45	90.09	---	---	Peak
2483.500	28.47	6.17	39.92	60.52	55.23	74.00	18.77	Peak
2484.850	28.47	6.17	39.92	51.76	46.47	74.00	27.53	Peak

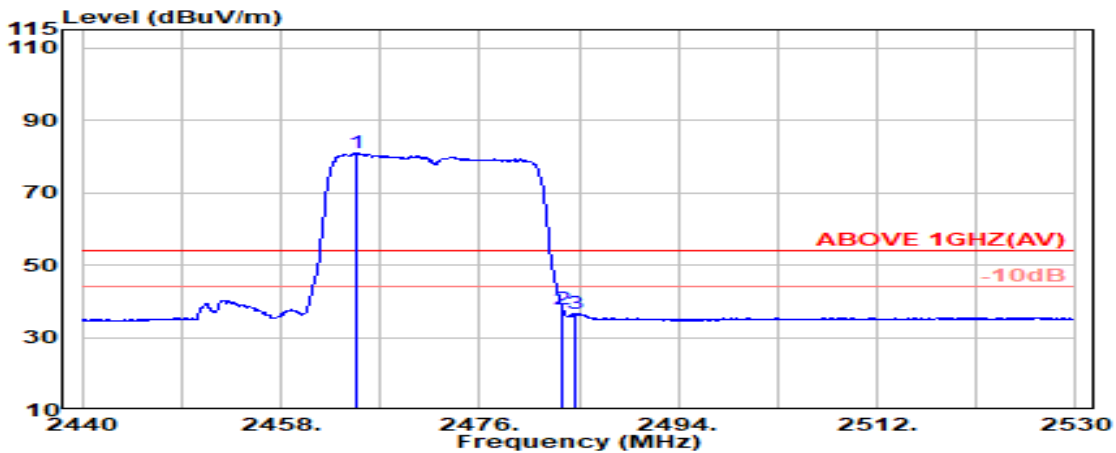


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.750	28.43	6.14	39.92	86.14	80.78	---	---	Average
2483.500	28.47	6.17	39.92	43.06	37.78	54.00	16.22	Average
2484.600	28.47	6.17	39.92	41.99	36.71	54.00	17.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

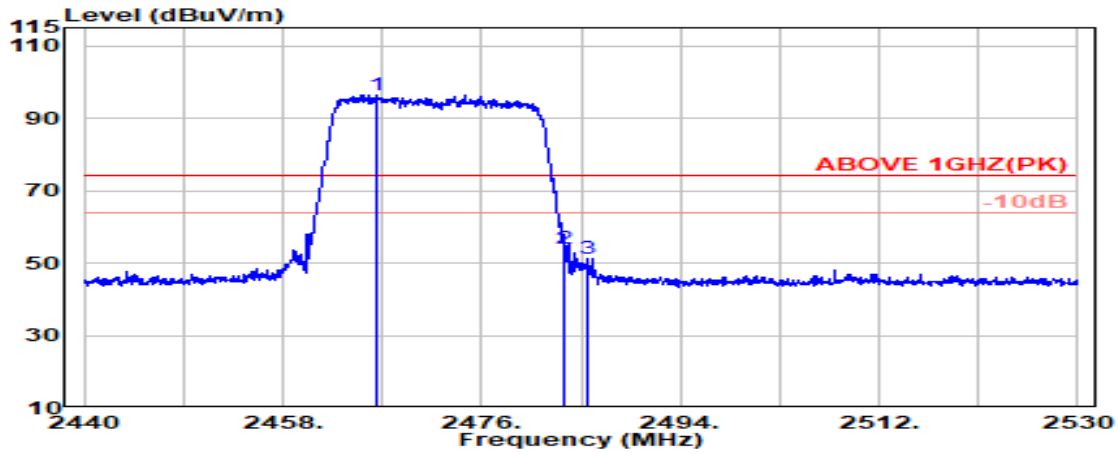

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.550	28.43	6.14	39.92	101.90	96.55	---	---	Peak
2483.500	28.47	6.17	39.92	59.33	54.04	74.00	19.96	Peak
2485.550	28.47	6.17	39.92	56.42	51.14	74.00	22.86	Peak

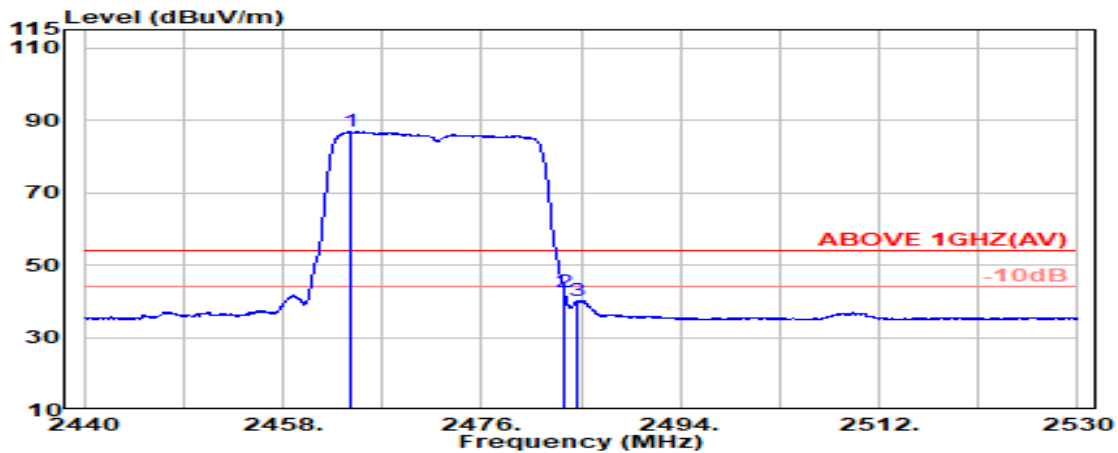


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.050	28.43	6.14	39.92	92.18	86.82	---	---	Average
2483.500	28.47	6.17	39.92	47.74	42.45	54.00	11.55	Average
2484.750	28.47	6.17	39.92	45.36	40.07	54.00	13.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

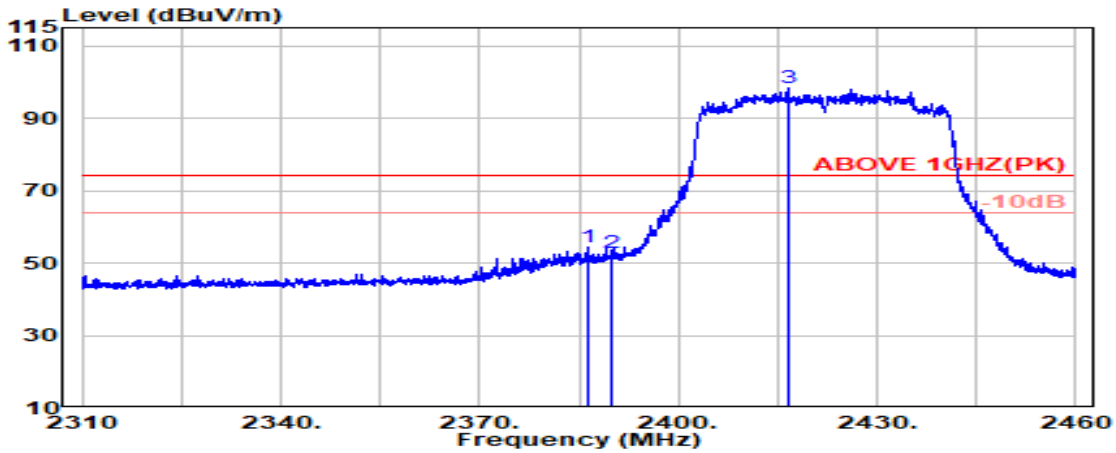

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.20	6.03	39.93	60.21	54.51	74.00	19.49	Peak
2390.000	28.20	6.03	39.93	58.60	52.90	74.00	21.10	Peak
@ 2416.500	28.27	6.07	39.93	103.91	98.32	---	---	Peak

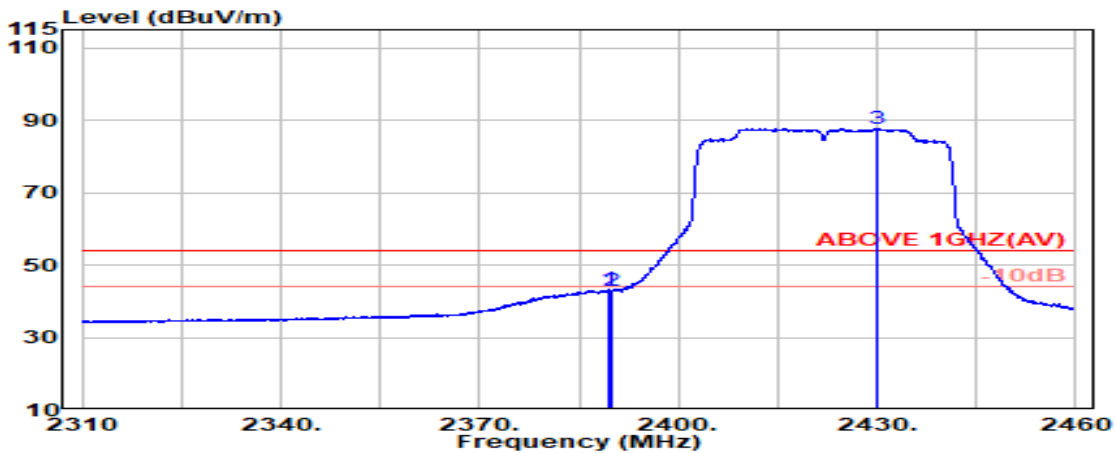


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	48.86	43.17	54.00	10.83	Average
2390.000	28.20	6.03	39.93	48.45	42.76	54.00	11.24	Average
@ 2430.100	28.32	6.09	39.93	93.34	87.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

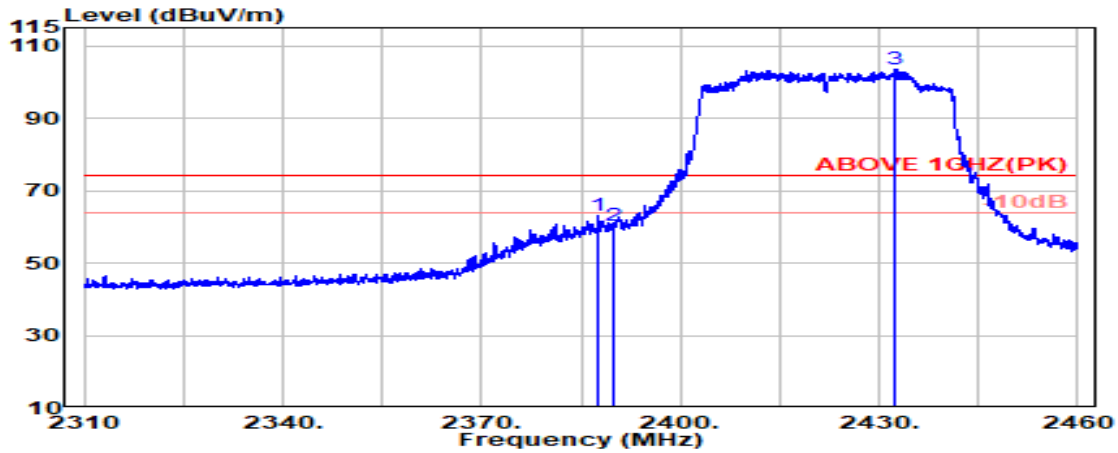

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.650	28.20	6.03	39.93	68.93	63.23	74.00	10.77	Peak
2390.000	28.20	6.03	39.93	65.92	60.23	74.00	13.77	Peak
@ 2432.500	28.33	6.10	39.93	108.90	103.40	---	---	Peak

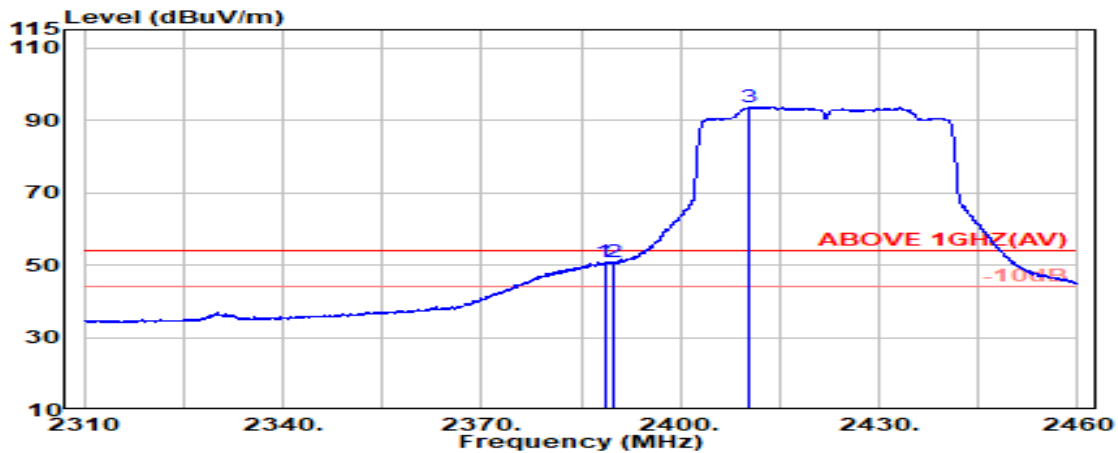


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.20	6.03	39.93	56.65	50.95	54.00	3.05	Average
2390.000	28.20	6.03	39.93	56.43	50.73	54.00	3.27	Average
@ 2410.500	28.24	6.06	39.93	99.32	93.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

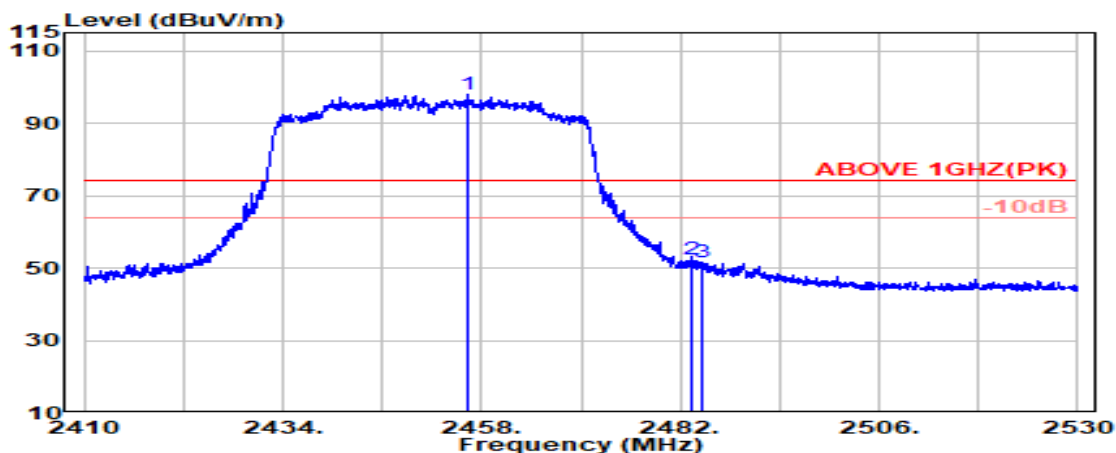

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.450	28.41	6.13	39.92	103.40	98.02	---	---	Peak
2483.500	28.47	6.17	39.92	57.81	52.53	74.00	21.47	Peak
2484.500	28.47	6.17	39.92	56.69	51.41	74.00	22.59	Peak

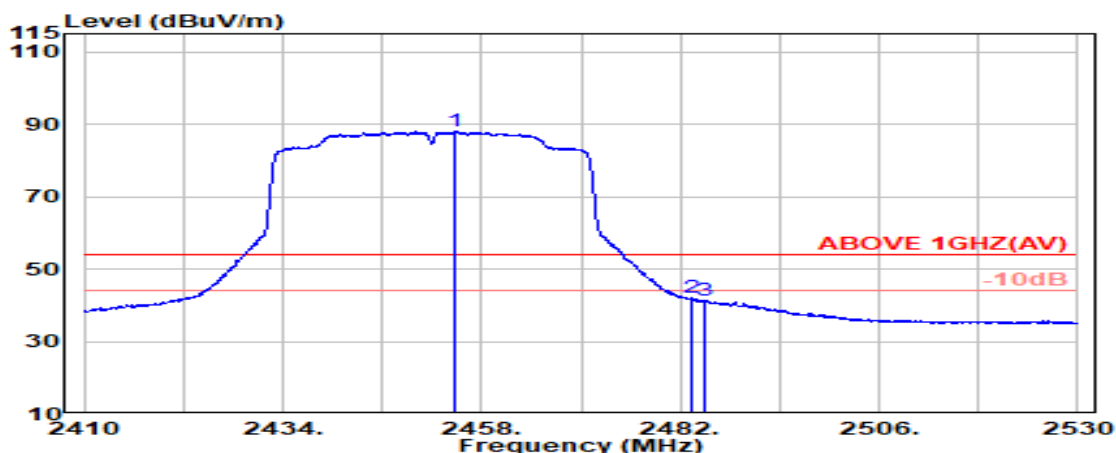


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.750	28.41	6.13	39.92	93.48	88.09	---	---	Average
2483.500	28.47	6.17	39.92	47.42	42.13	54.00	11.87	Average
2484.850	28.47	6.17	39.92	46.47	41.19	54.00	12.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

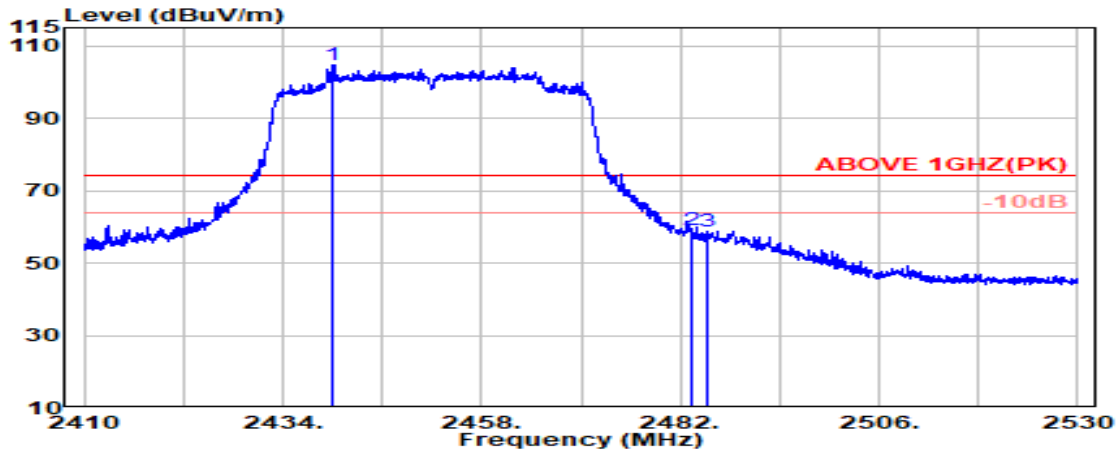

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.100	28.36	6.11	39.93	110.29	104.83	---	---	Peak
2483.500	28.47	6.17	39.92	64.25	58.96	74.00	15.04	Peak
2485.200	28.47	6.17	39.92	64.14	58.86	74.00	15.14	Peak

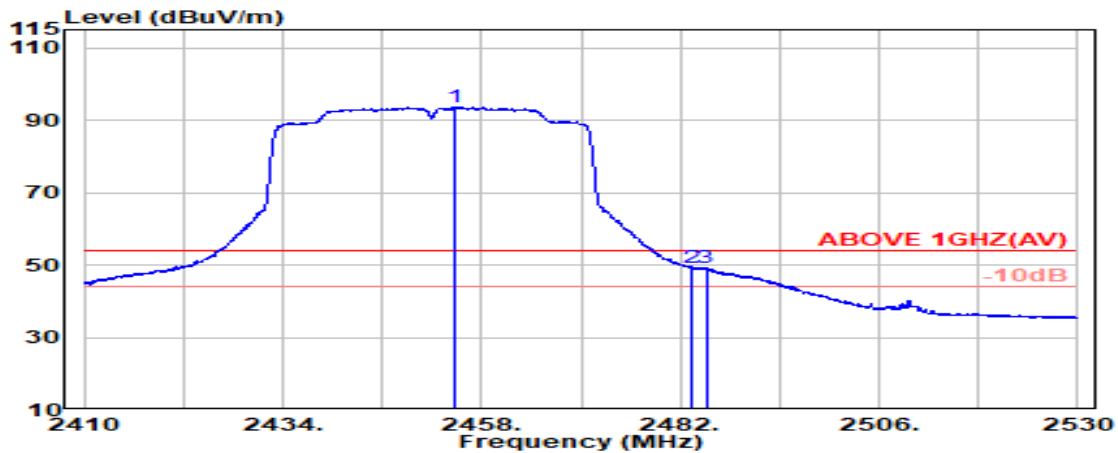


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.650	28.41	6.13	39.92	99.06	93.68	---	---	Average
2483.500	28.47	6.17	39.92	54.40	49.11	54.00	4.89	Average
2485.100	28.47	6.17	39.92	54.43	49.14	54.00	4.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

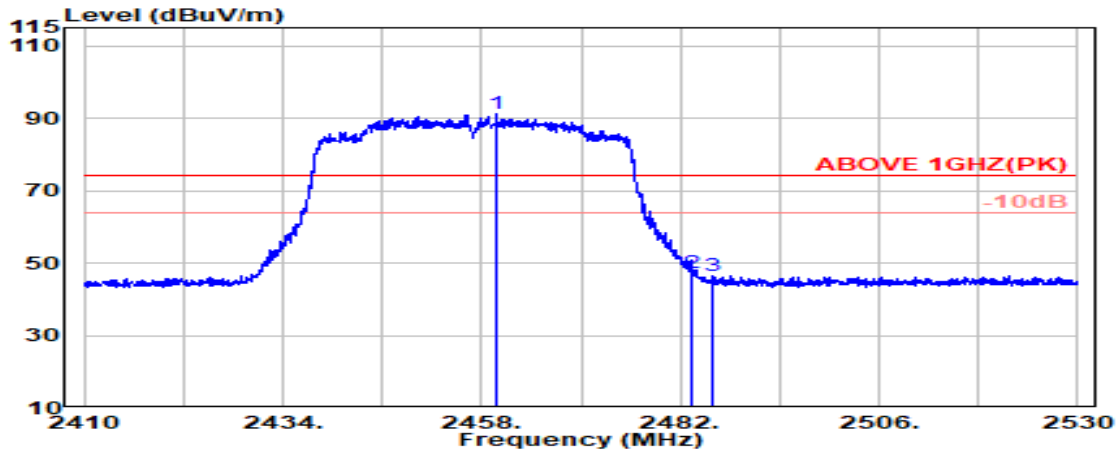

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.42	6.13	39.92	96.54	91.17	---	---	Peak
2483.500	28.47	6.17	39.92	52.57	47.28	74.00	26.72	Peak
2486.000	28.47	6.17	39.92	51.61	46.33	74.00	27.67	Peak

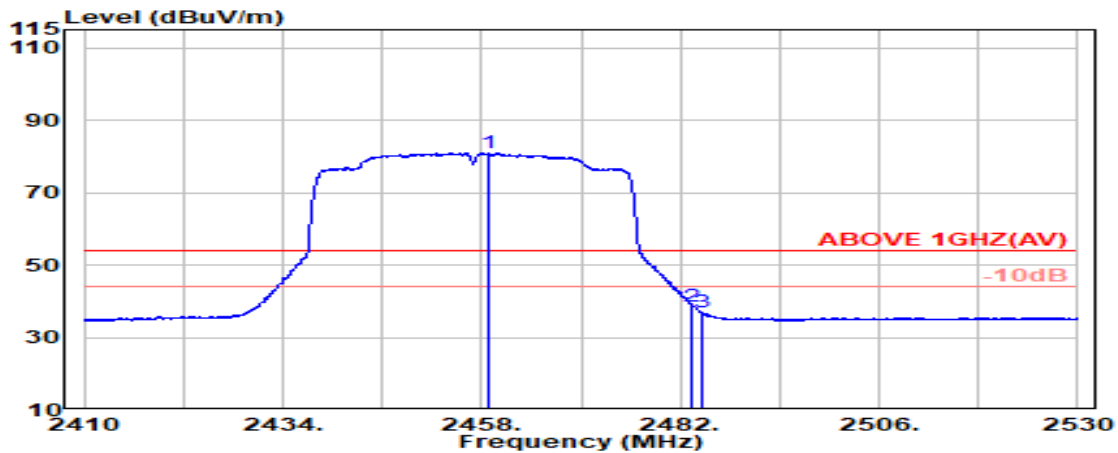


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.42	6.13	39.92	86.28	80.91	---	---	Average
2483.500	28.47	6.17	39.92	43.74	38.46	54.00	15.54	Average
2484.650	28.47	6.17	39.92	42.33	37.05	54.00	16.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

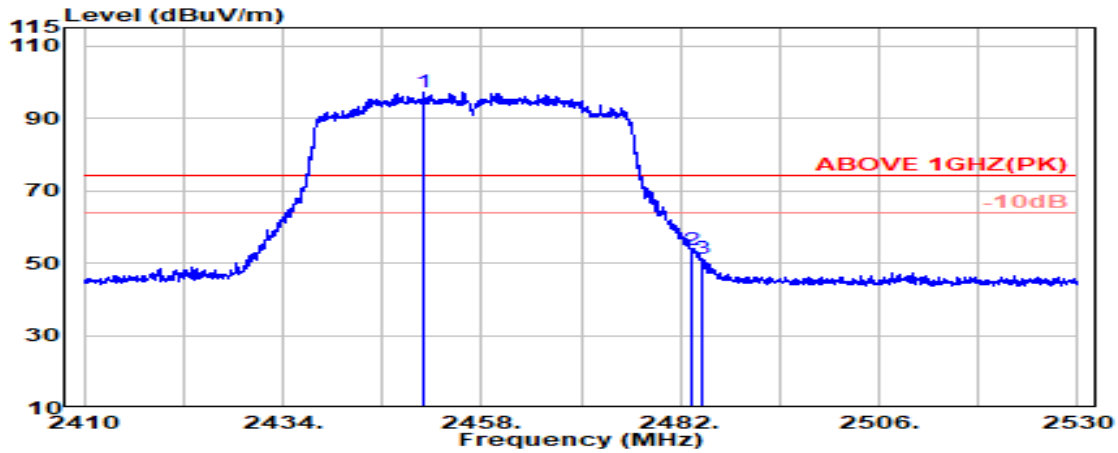

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.950	28.40	6.12	39.92	102.58	97.18	---	---	Peak
2483.500	28.47	6.17	39.92	58.78	53.50	74.00	20.50	Peak
2484.500	28.47	6.17	39.92	56.54	51.25	74.00	22.75	Peak

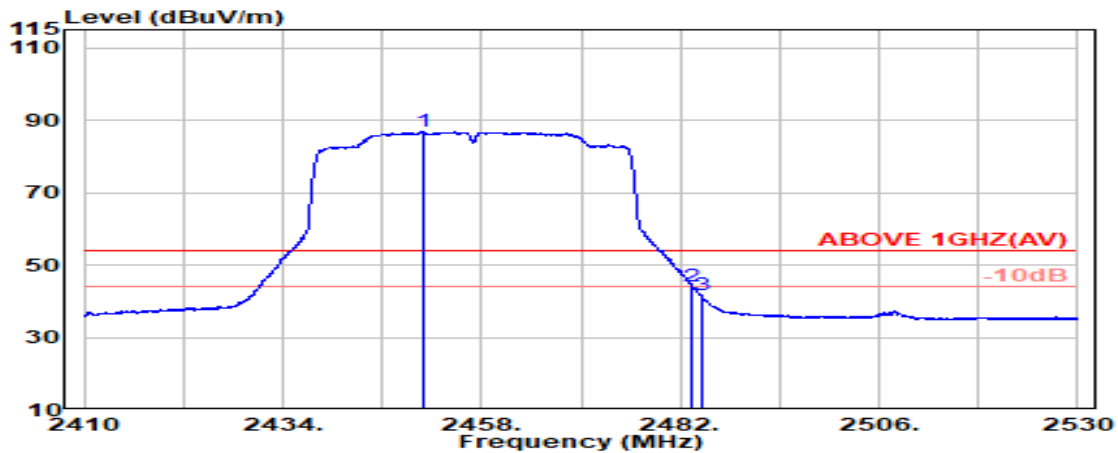


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.850	28.40	6.12	39.92	92.21	86.81	---	---	Average
2483.500	28.47	6.17	39.92	49.44	44.15	54.00	9.85	Average
2484.500	28.47	6.17	39.92	46.82	41.54	54.00	12.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

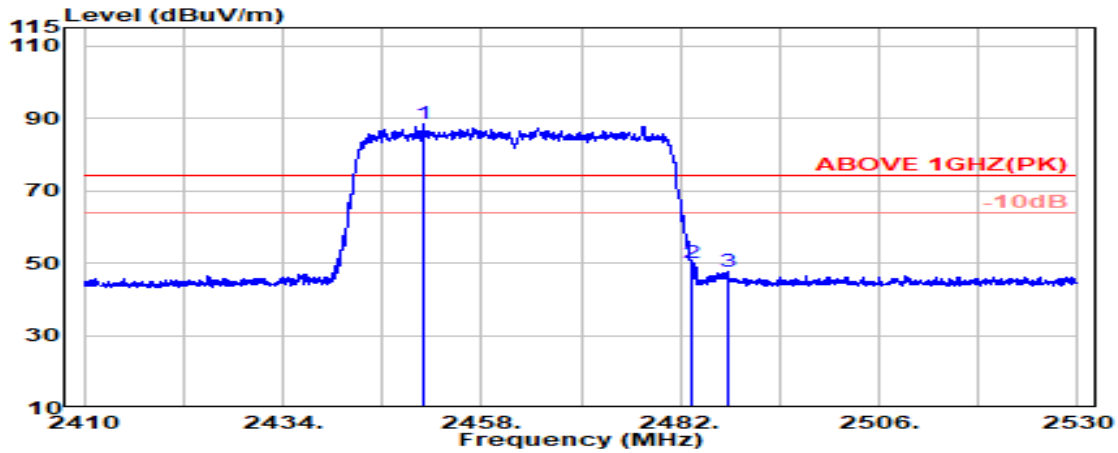

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.050	28.40	6.12	39.92	93.69	88.28	---	---	Peak
2483.500	28.47	6.17	39.92	55.21	49.93	74.00	24.07	Peak
2487.800	28.48	6.17	39.92	52.92	47.65	74.00	26.35	Peak

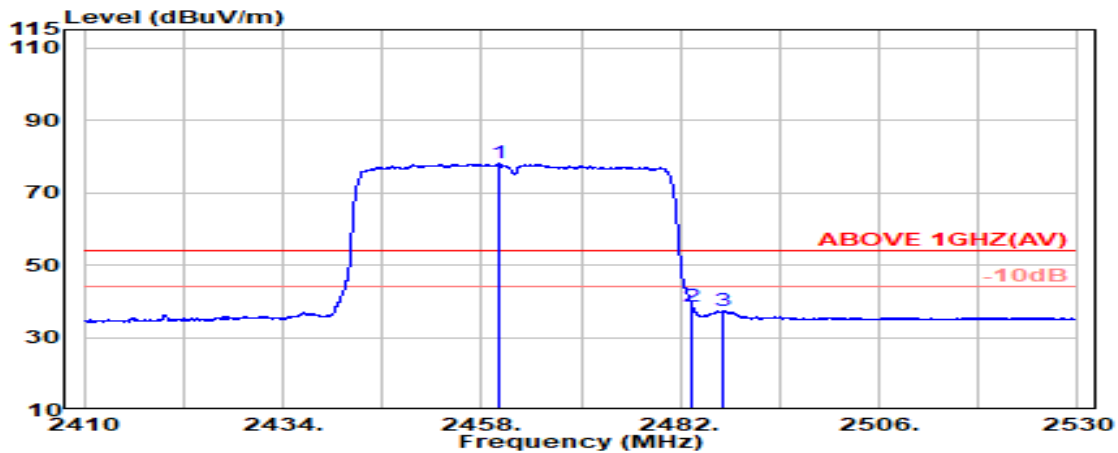


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.42	6.13	39.92	83.33	77.96	---	---	Average
2483.500	28.47	6.17	39.92	43.73	38.44	54.00	15.56	Average
2487.200	28.47	6.17	39.92	42.60	37.33	54.00	16.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

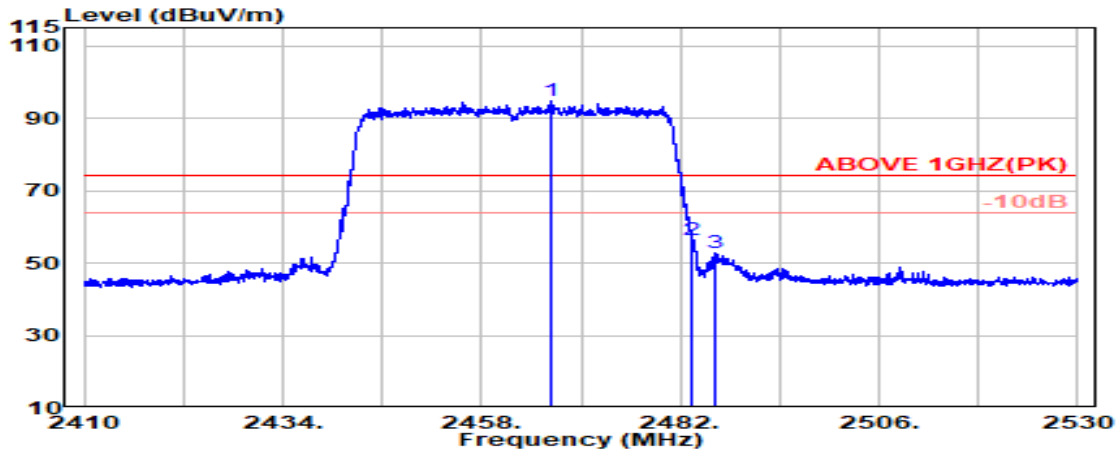

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.43	6.14	39.92	100.07	94.73	---	---	Peak
2483.500	28.47	6.17	39.92	61.82	56.53	74.00	17.47	Peak
2486.050	28.47	6.17	39.92	58.10	52.82	74.00	21.18	Peak

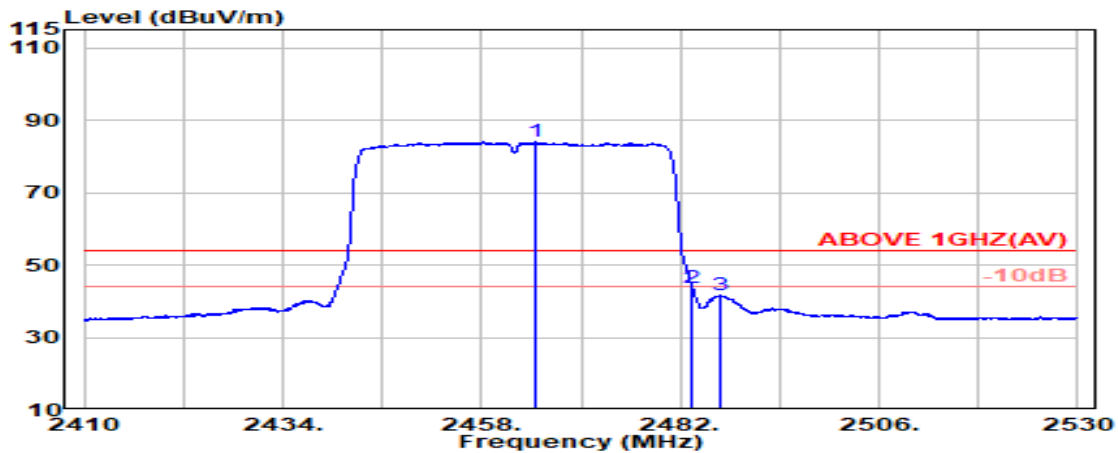


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	6.14	39.92	89.30	83.95	---	---	Average
2483.500	28.47	6.17	39.92	49.03	43.74	54.00	10.26	Average
2486.950	28.47	6.17	39.92	46.86	41.58	54.00	12.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

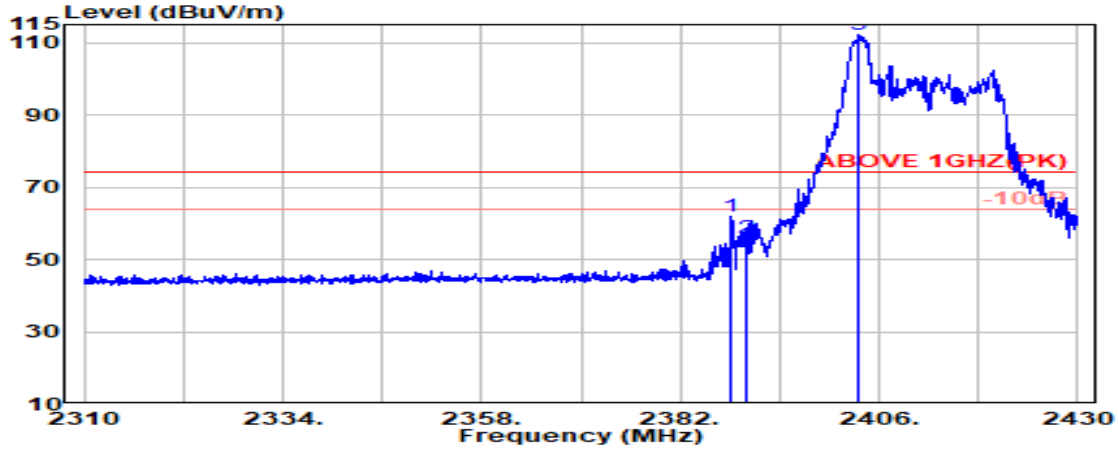

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.20	6.03	39.93	67.72	62.02	74.00	11.98	Peak
2390.000	28.20	6.03	39.93	61.70	56.01	74.00	17.99	Peak
@ 2403.400	28.21	6.05	39.93	117.78	112.12	---	---	Peak

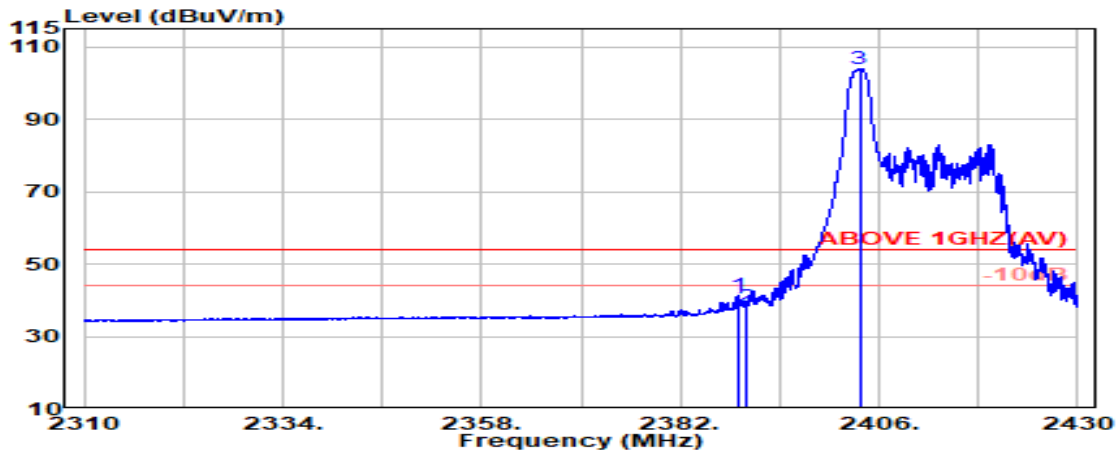


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	47.00	41.31	54.00	12.69	Average
2390.000	28.20	6.03	39.93	43.99	38.29	54.00	15.71	Average
@ 2403.650	28.21	6.05	39.93	109.68	104.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

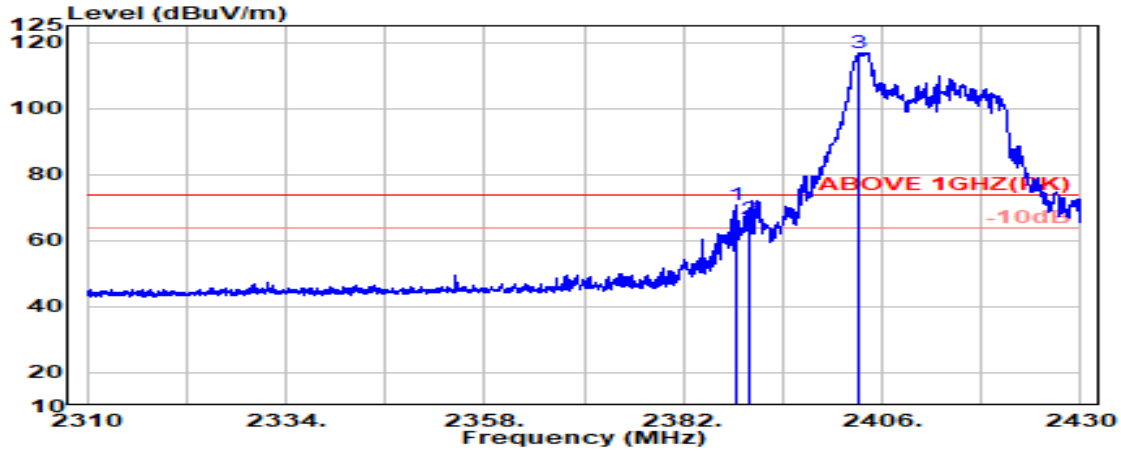

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.350	28.20	6.03	39.93	76.31	70.62	74.00	3.38	Peak
2390.000	28.20	6.03	39.93	72.05	66.35	74.00	7.65	Peak
@ 2403.250	28.21	6.05	39.93	122.58	116.92	---	---	Peak

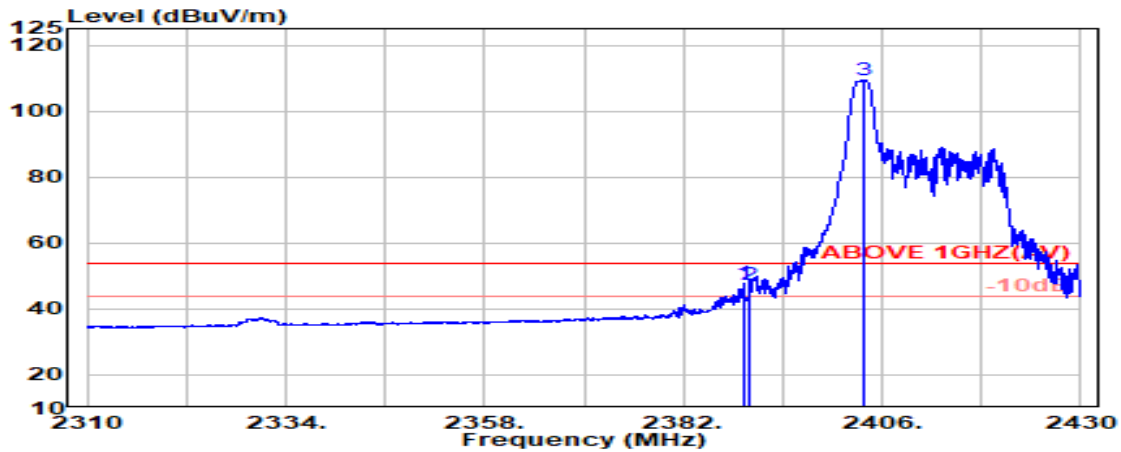


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.20	6.03	39.93	53.30	47.60	54.00	6.40	Average
2390.000	28.20	6.03	39.93	52.95	47.25	54.00	6.75	Average
@ 2403.900	28.22	6.05	39.93	115.08	109.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

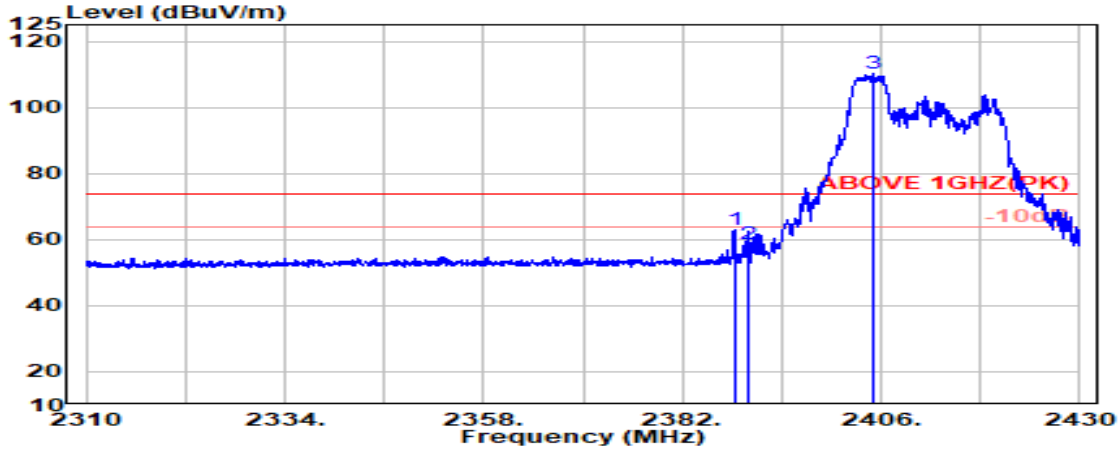

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.250	28.20	6.03	39.93	68.63	62.94	74.00	11.06	Peak
2390.000	28.20	6.03	39.93	64.14	58.44	74.00	15.56	Peak
@ 2404.950	28.22	6.06	39.93	115.93	110.28	---	---	Peak

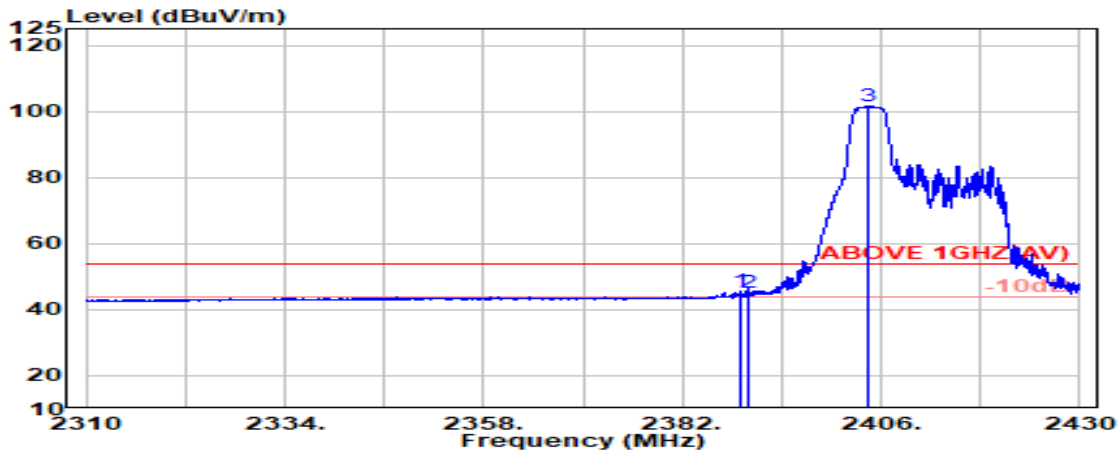


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	51.23	45.53	54.00	8.47	Average
2390.000	28.20	6.03	39.93	50.71	45.02	54.00	8.98	Average
@ 2404.500	28.22	6.06	39.93	107.20	101.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

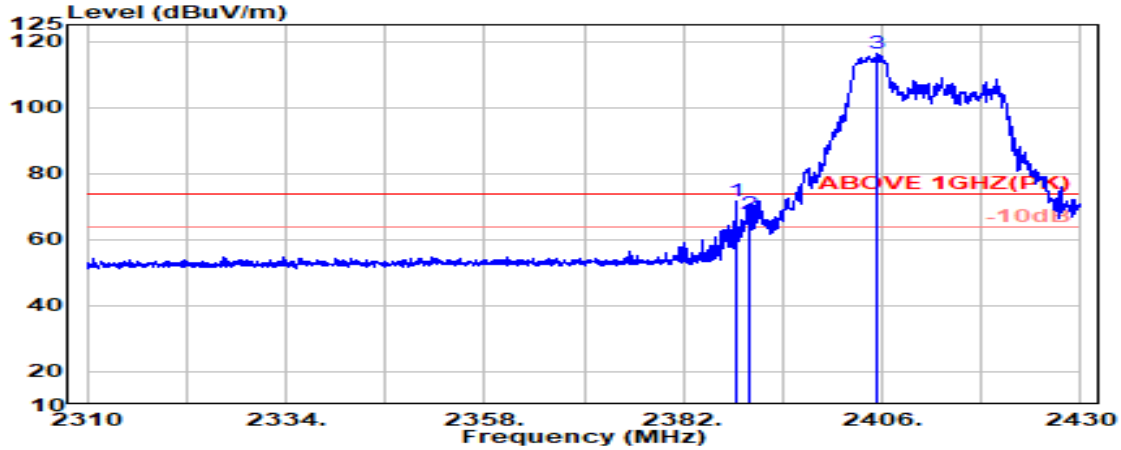

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.350	28.20	6.03	39.93	77.33	71.63	74.00	2.37	Peak
2390.000	28.20	6.03	39.93	73.50	67.80	74.00	6.20	Peak
@ 2405.350	28.22	6.06	39.93	121.96	116.31	---	---	Peak

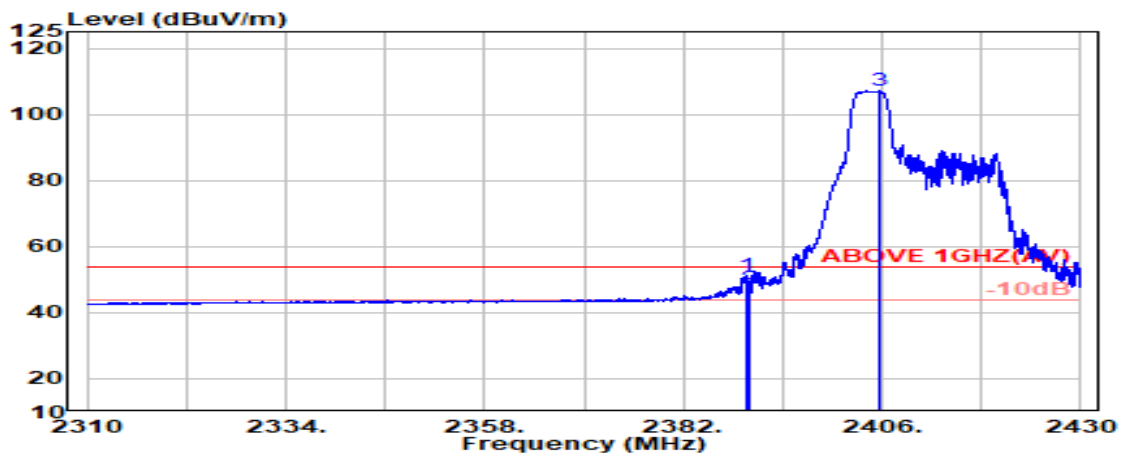


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	56.76	51.06	54.00	2.94	Average
2390.000	28.20	6.03	39.93	53.18	47.49	54.00	6.51	Average
@ 2405.800	28.22	6.06	39.93	112.71	107.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

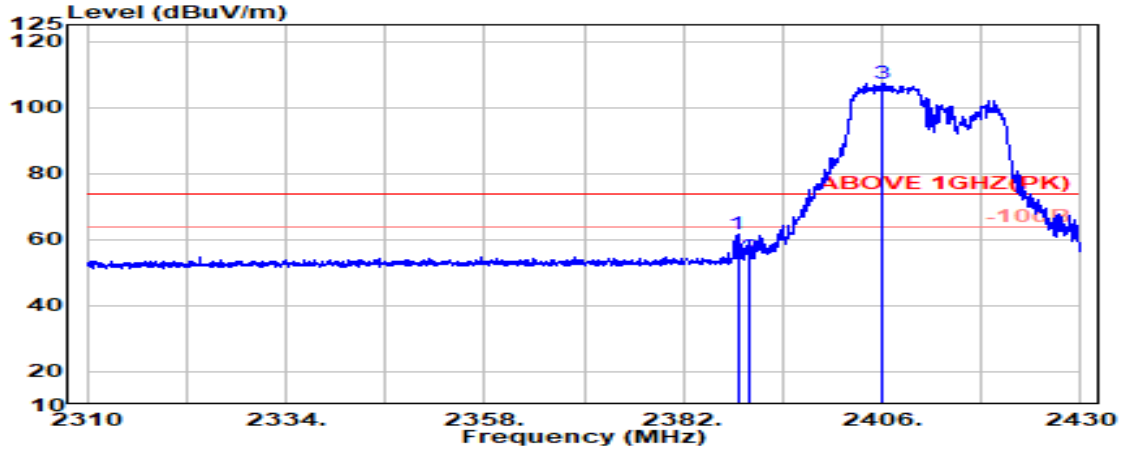

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.20	6.03	39.93	67.48	61.78	74.00	12.22	Peak
2390.000	28.20	6.03	39.93	60.58	54.88	74.00	19.12	Peak
@ 2406.150	28.22	6.06	39.93	112.93	107.28	---	---	Peak

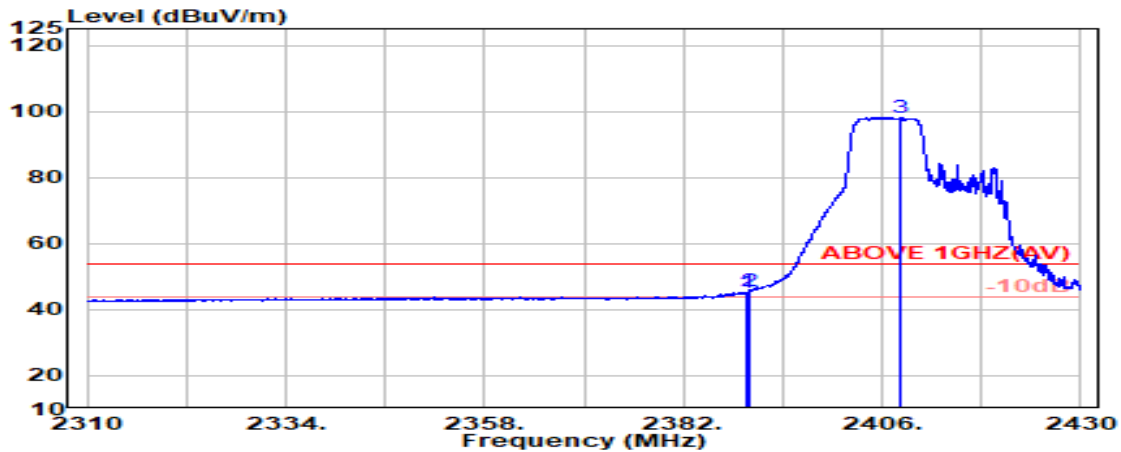


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	6.03	39.93	51.02	45.33	54.00	8.67	Average
2390.000	28.20	6.03	39.93	51.18	45.49	54.00	8.51	Average
@ 2408.300	28.23	6.06	39.93	103.89	98.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

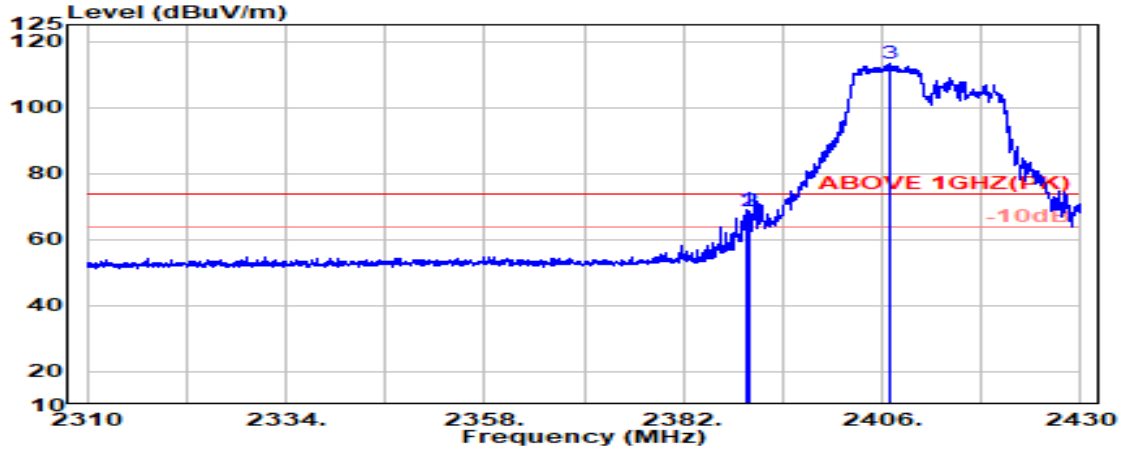

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	6.03	39.93	74.72	69.03	74.00	4.97	Peak
2390.000	28.20	6.03	39.93	74.20	68.51	74.00	5.49	Peak
@ 2407.050	28.23	6.06	39.93	118.72	113.08	---	---	Peak

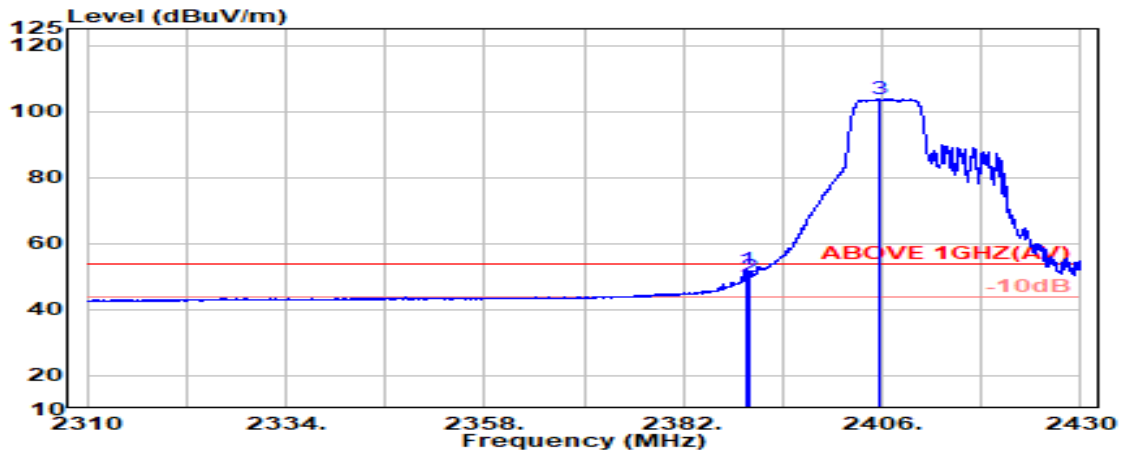


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	57.67	51.97	54.00	2.03	Average
2390.000	28.20	6.03	39.93	55.41	49.71	54.00	4.29	Average
@ 2405.600	28.22	6.06	39.93	109.51	103.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

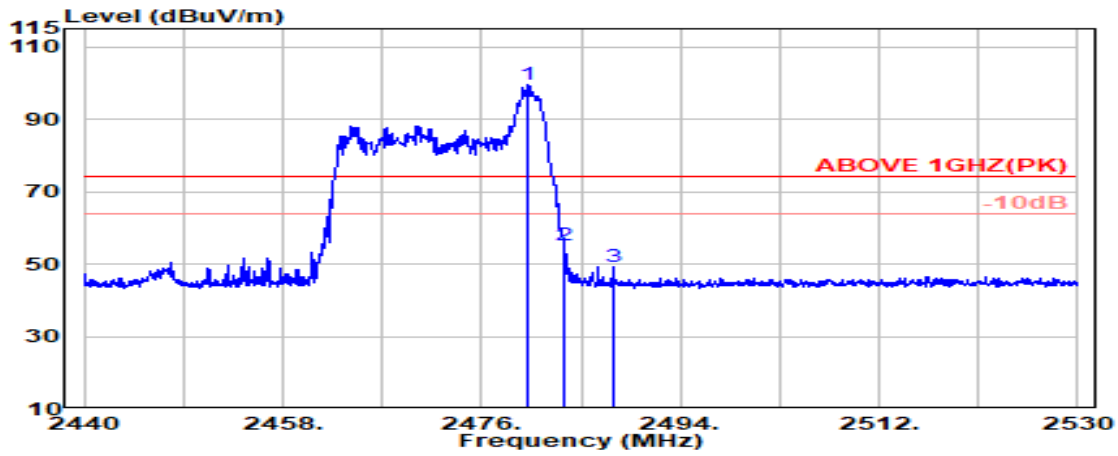

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.46	6.16	39.92	104.70	99.40	---	---	Peak
2483.500	28.47	6.17	39.92	60.40	55.11	74.00	18.89	Peak
2487.900	28.48	6.17	39.92	54.40	49.13	74.00	24.87	Peak

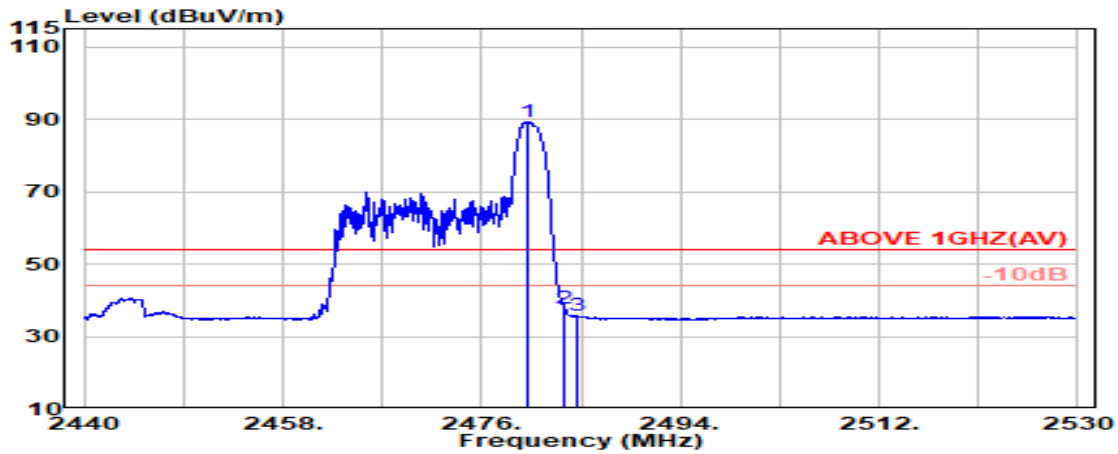


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	39.92	94.57	89.27	---	---	Average
2483.500	28.47	6.17	39.92	43.17	37.88	54.00	16.12	Average
2484.550	28.47	6.17	39.92	40.95	35.67	54.00	18.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

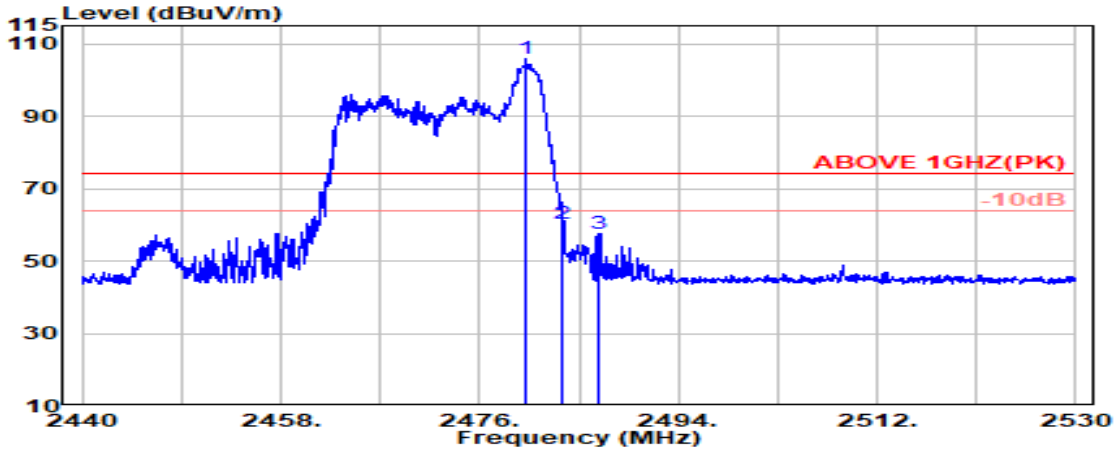

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	39.92	111.31	106.01	---	---	Peak
2483.500	28.47	6.17	39.92	65.43	60.14	74.00	13.86	Peak
2486.850	28.47	6.17	39.92	62.93	57.65	74.00	16.35	Peak

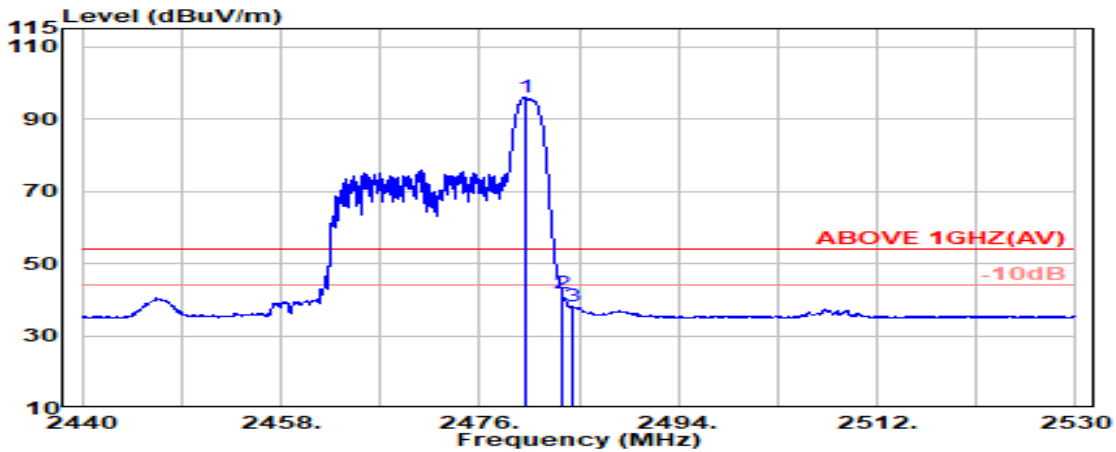


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.46	6.16	39.92	101.22	95.92	---	---	Average
2483.500	28.47	6.17	39.92	47.08	41.79	54.00	12.21	Average
2484.500	28.47	6.17	39.92	43.30	38.02	54.00	15.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

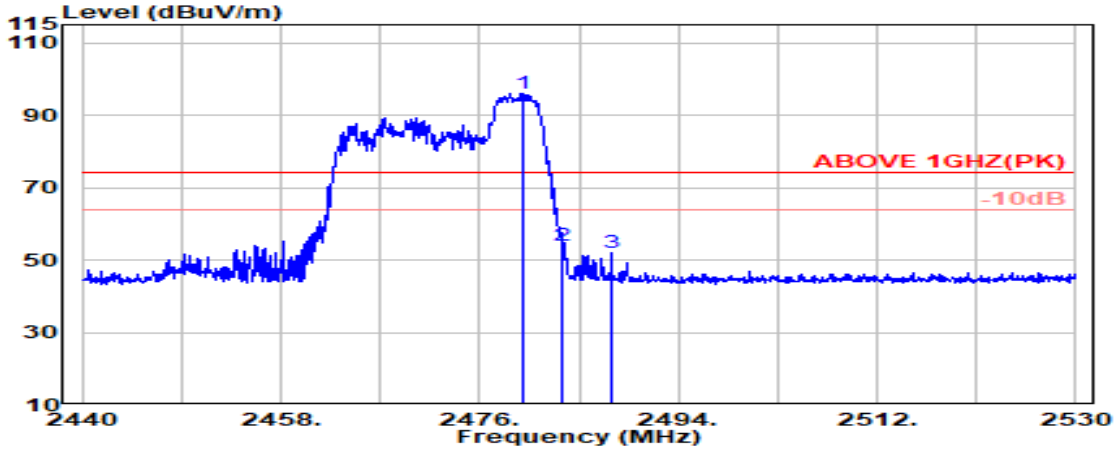

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.850	28.46	6.16	39.92	101.34	96.04	---	---	Peak
2483.500	28.47	6.17	39.92	59.37	54.08	74.00	19.92	Peak
2487.950	28.48	6.17	39.92	57.34	52.07	74.00	21.93	Peak

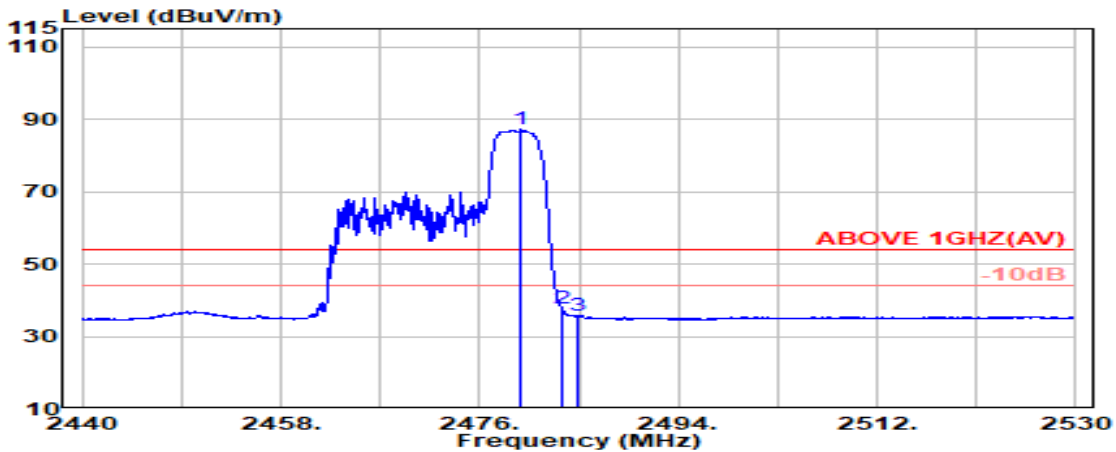


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.46	6.16	39.92	92.41	87.11	---	---	Average
2483.500	28.47	6.17	39.92	42.88	37.59	54.00	16.41	Average
2484.950	28.47	6.17	39.92	41.03	35.75	54.00	18.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

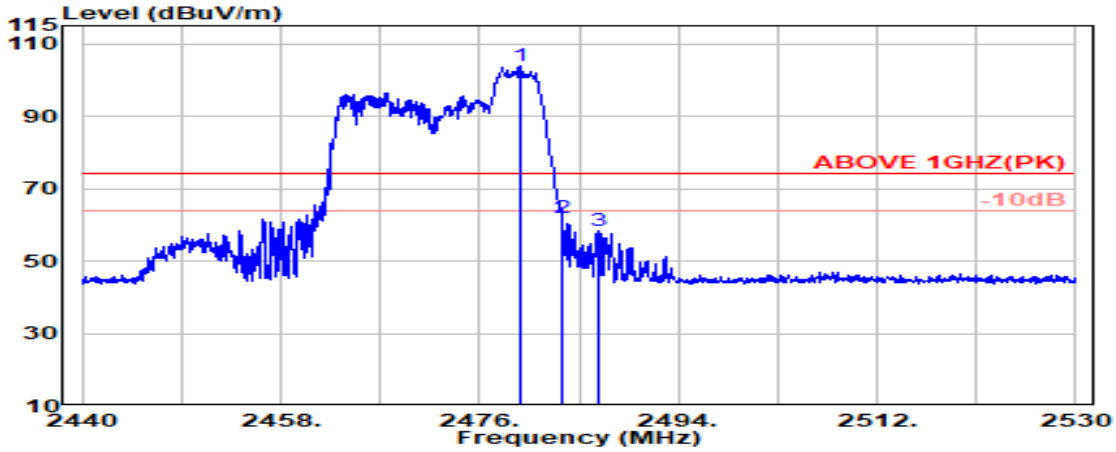

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.46	6.16	39.92	109.03	103.73	---	---	Peak
2483.500	28.47	6.17	39.92	67.29	62.00	74.00	12.00	Peak
2486.700	28.47	6.17	39.92	63.70	58.43	74.00	15.57	Peak

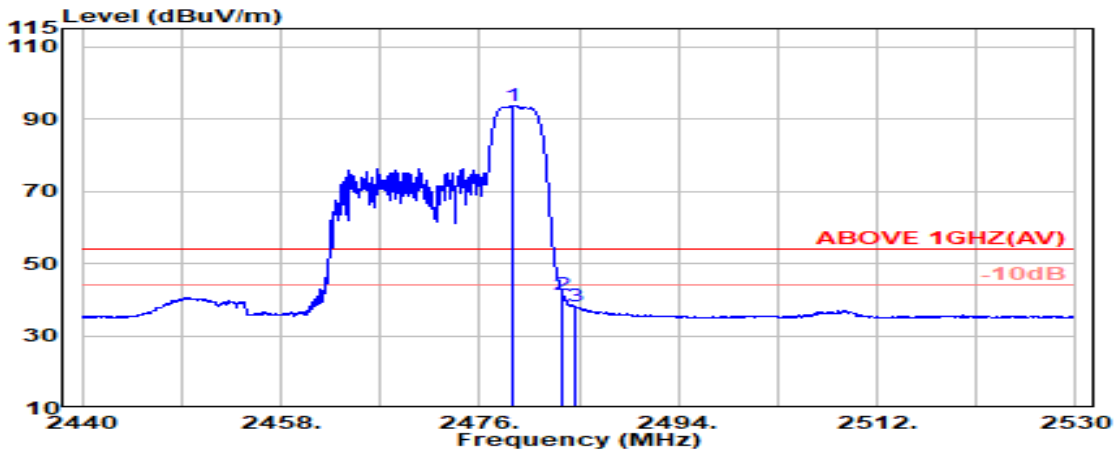


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.46	6.16	39.92	99.06	93.76	---	---	Average
2483.500	28.47	6.17	39.92	46.72	41.43	54.00	12.57	Average
2484.600	28.47	6.17	39.92	43.52	38.24	54.00	15.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

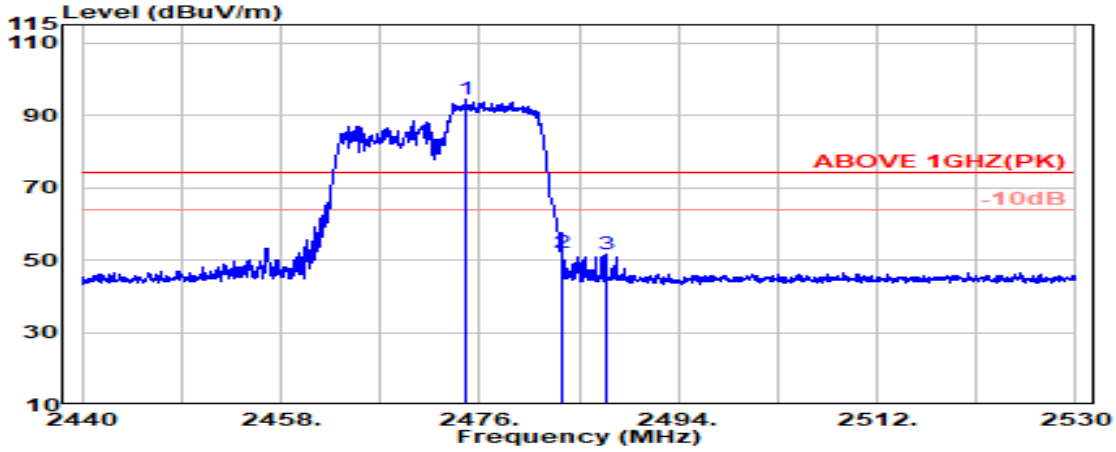

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.800	28.45	6.16	39.92	99.87	94.55	---	---	Peak
2483.500	28.47	6.17	39.92	57.19	51.90	74.00	22.10	Peak
2487.400	28.47	6.17	39.92	57.00	51.73	74.00	22.27	Peak

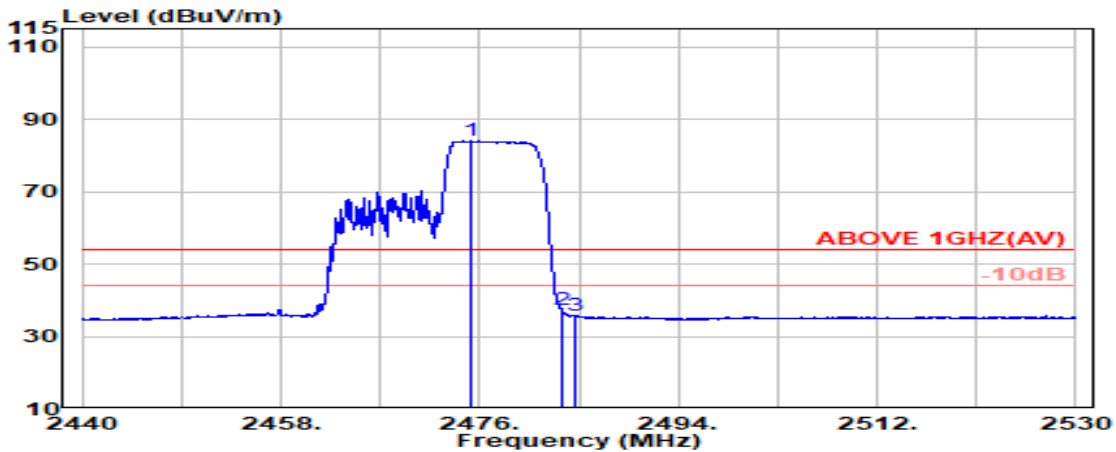


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	28.45	6.16	39.92	89.30	83.98	---	---	Average
2483.500	28.47	6.17	39.92	42.53	37.24	54.00	16.76	Average
2484.700	28.47	6.17	39.92	41.16	35.87	54.00	18.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

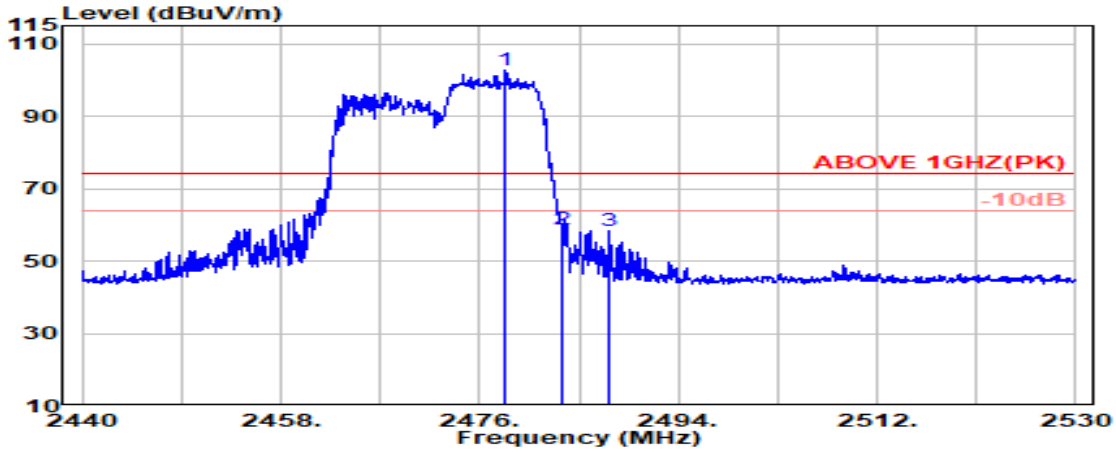

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.350	28.46	6.16	39.92	107.90	102.60	---	---	Peak
2483.500	28.47	6.17	39.92	63.93	58.64	74.00	15.36	Peak
2487.650	28.48	6.17	39.92	63.81	58.54	74.00	15.46	Peak

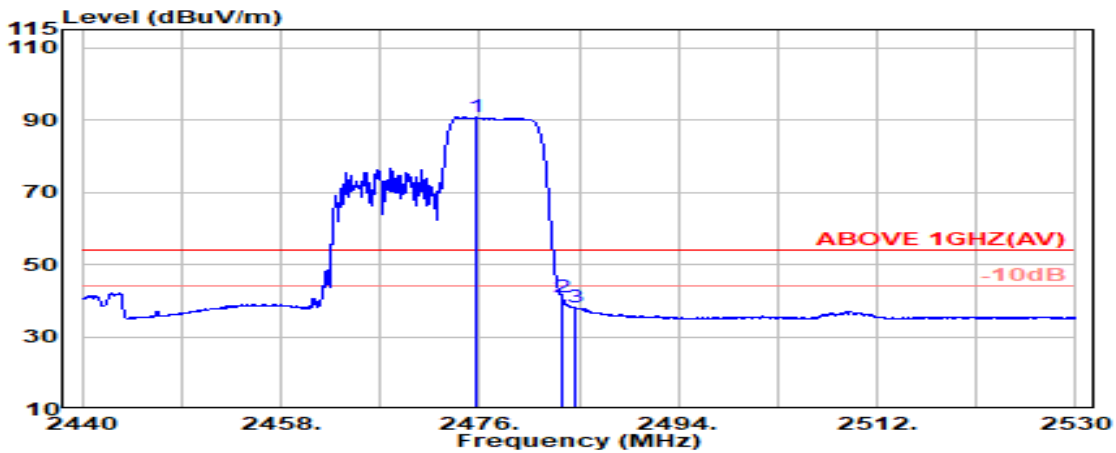


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.45	6.16	39.92	96.12	90.81	---	---	Average
2483.500	28.47	6.17	39.92	46.03	40.75	54.00	13.25	Average
2484.650	28.47	6.17	39.92	43.38	38.10	54.00	15.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

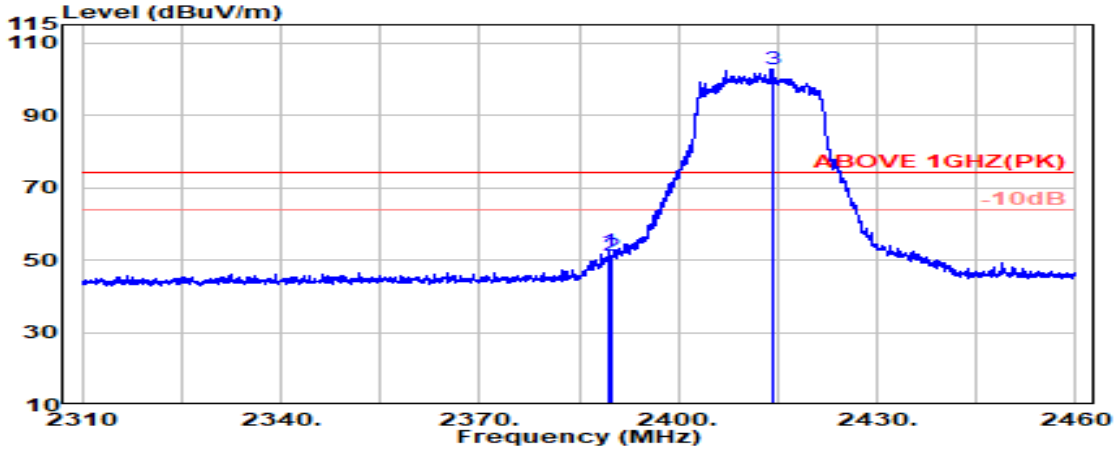

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	6.03	39.93	58.26	52.57	74.00	21.43	Peak
2390.000	28.20	6.03	39.93	56.74	51.05	74.00	22.95	Peak
@ 2414.100	28.26	6.07	39.93	108.46	102.86	---	---	Peak

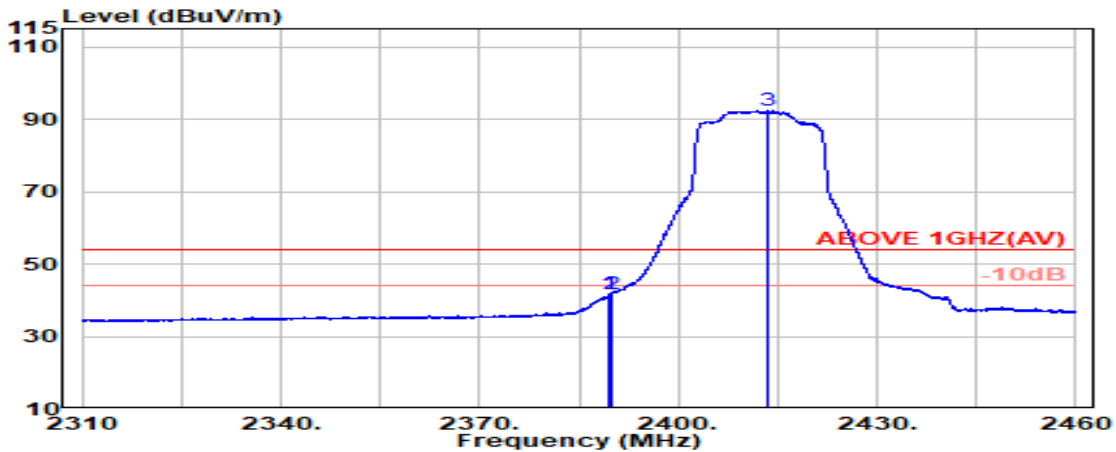


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	6.03	39.93	47.30	41.61	54.00	12.39	Average
2390.000	28.20	6.03	39.93	47.35	41.65	54.00	12.35	Average
@ 2413.550	28.25	6.07	39.93	97.88	92.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

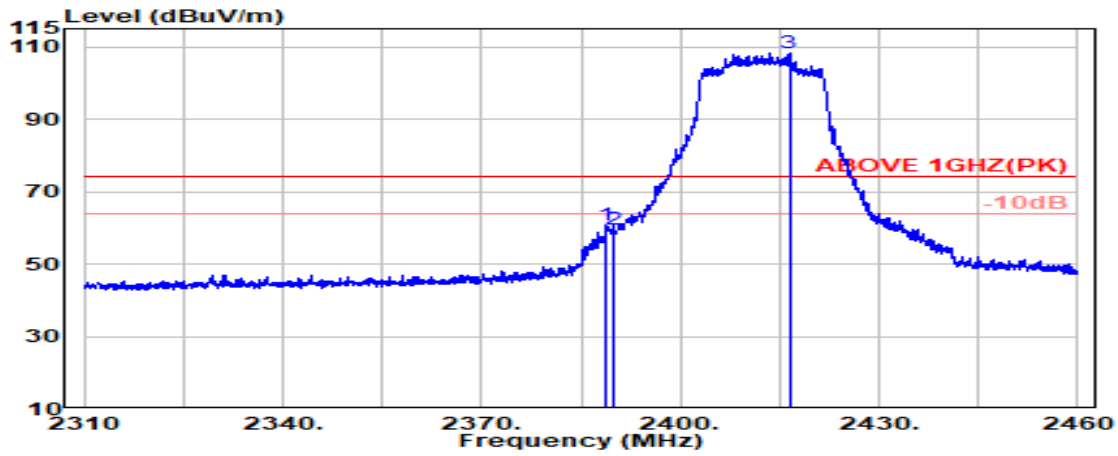

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	6.03	39.93	66.47	60.78	74.00	13.22	Peak
2390.000	28.20	6.03	39.93	65.24	59.55	74.00	14.45	Peak
@ 2416.450	28.27	6.07	39.93	113.80	108.21	---	---	Peak

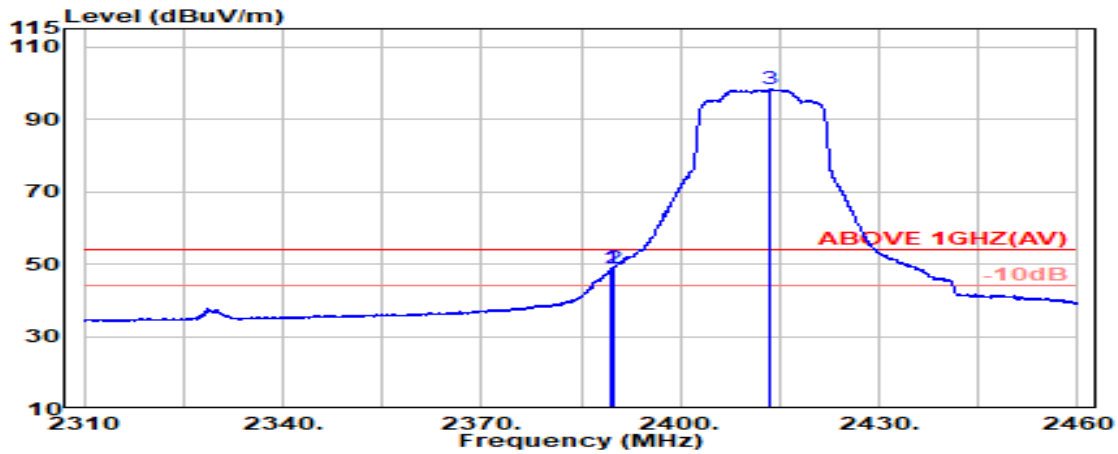


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	54.69	49.00	54.00	5.00	Average
2390.000	28.20	6.03	39.93	54.63	48.93	54.00	5.07	Average
@ 2413.650	28.26	6.07	39.93	103.82	98.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

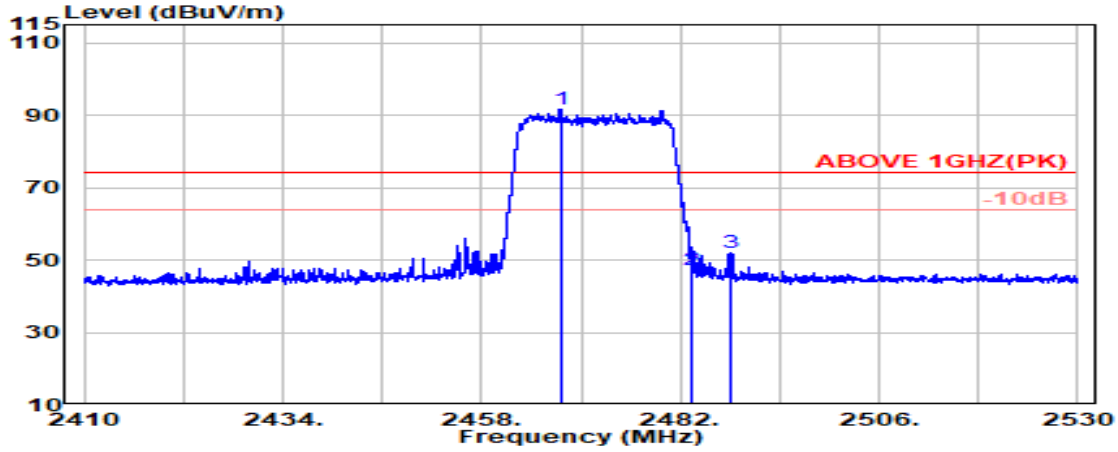

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.44	6.14	39.92	97.13	91.78	---	---	Peak
2483.500	28.47	6.17	39.92	52.63	47.34	74.00	26.66	Peak
2488.100	28.48	6.17	39.92	57.15	51.88	74.00	22.12	Peak

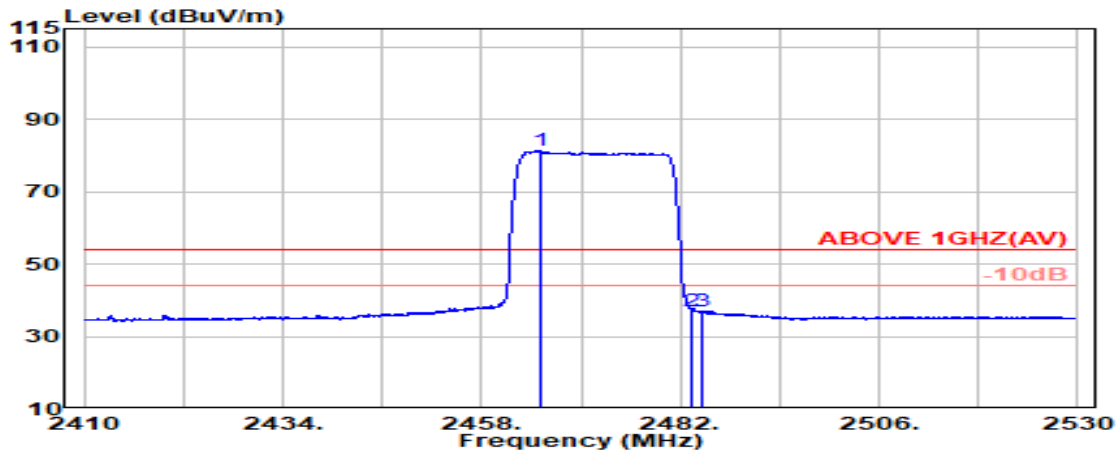


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.43	6.14	39.92	86.68	81.33	---	---	Average
2483.500	28.47	6.17	39.92	42.40	37.11	54.00	16.89	Average
2484.700	28.47	6.17	39.92	42.26	36.97	54.00	17.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

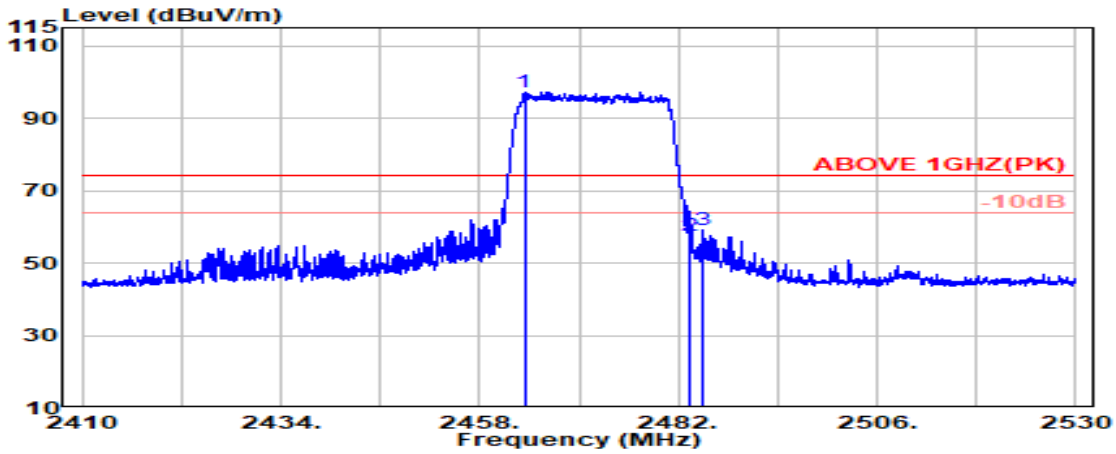

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	6.14	39.92	102.69	97.34	---	---	Peak
2483.500	28.47	6.17	39.92	62.79	57.50	74.00	16.50	Peak
2484.850	28.47	6.17	39.92	64.39	59.11	74.00	14.89	Peak

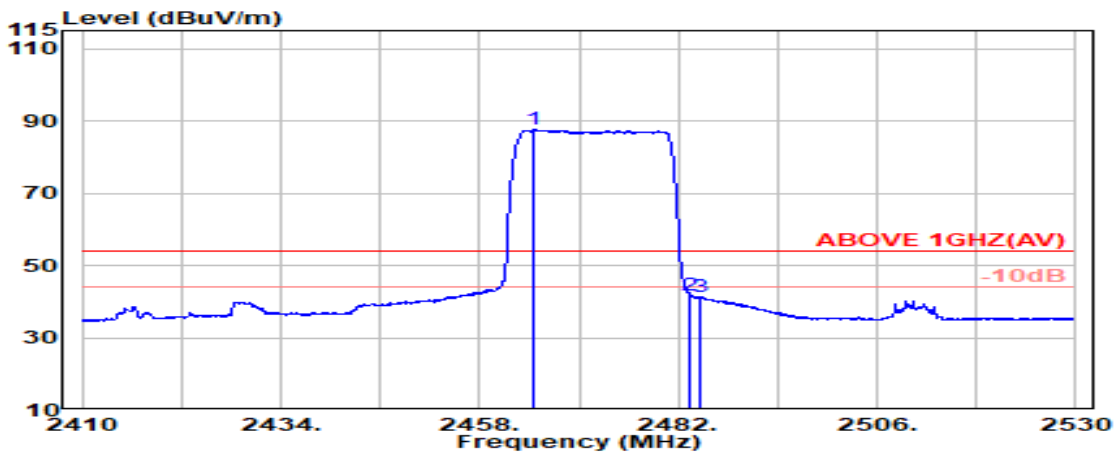


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.43	6.14	39.92	92.97	87.62	---	---	Average
2483.500	28.47	6.17	39.92	46.98	41.69	54.00	12.31	Average
2484.500	28.47	6.17	39.92	46.51	41.23	54.00	12.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

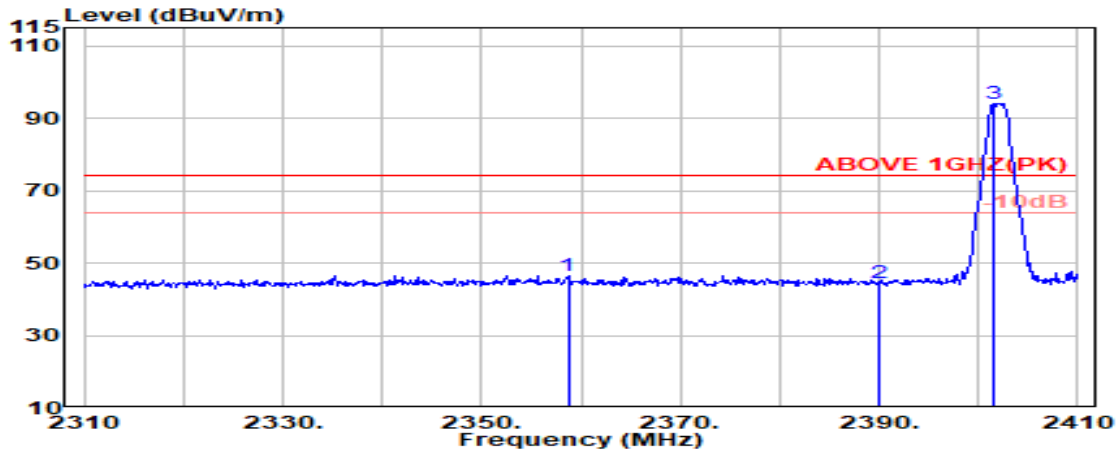

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.700	28.20	5.99	39.93	52.27	46.53	74.00	27.47	Peak
2390.000	28.20	6.03	39.93	50.02	44.32	74.00	29.68	Peak
@ 2401.500	28.21	6.05	39.93	99.84	94.17	---	---	Peak

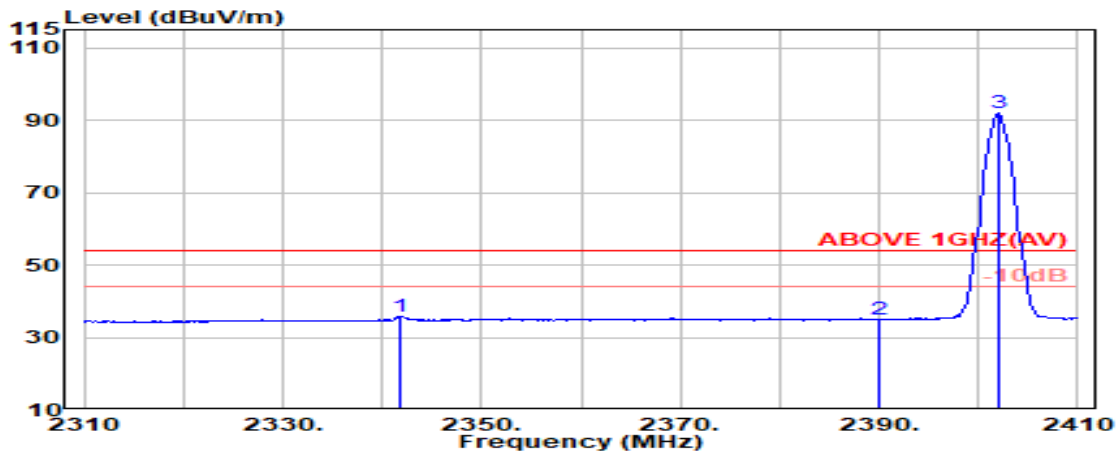


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.800	28.12	5.96	39.93	41.61	35.76	54.00	18.24	Average
2390.000	28.20	6.03	39.93	40.59	34.90	54.00	19.10	Average
@ 2402.000	28.21	6.05	39.93	97.50	91.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

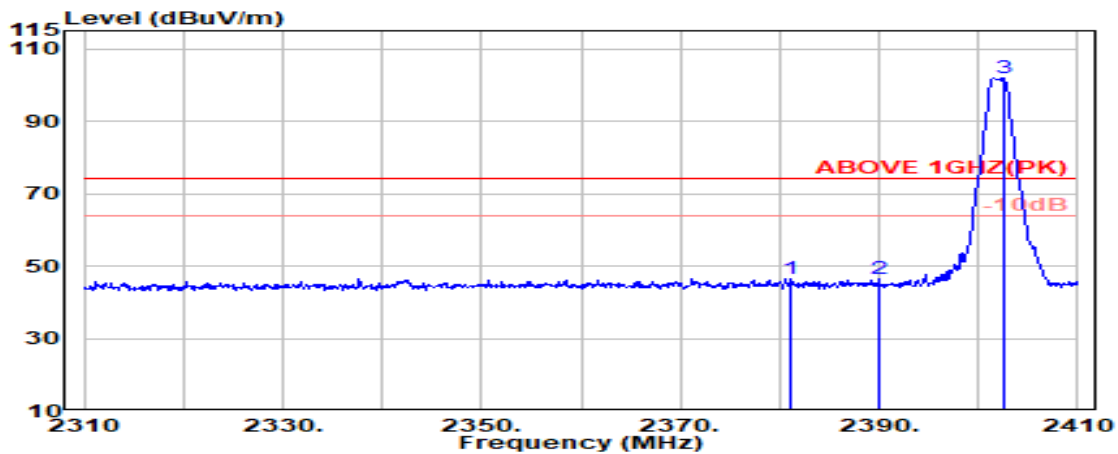

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.200	28.20	6.02	39.93	52.20	46.49	74.00	27.51	Peak
2390.000	28.20	6.03	39.93	52.20	46.50	74.00	27.50	Peak
@ 2402.500	28.21	6.05	39.93	107.70	102.04	---	---	Peak

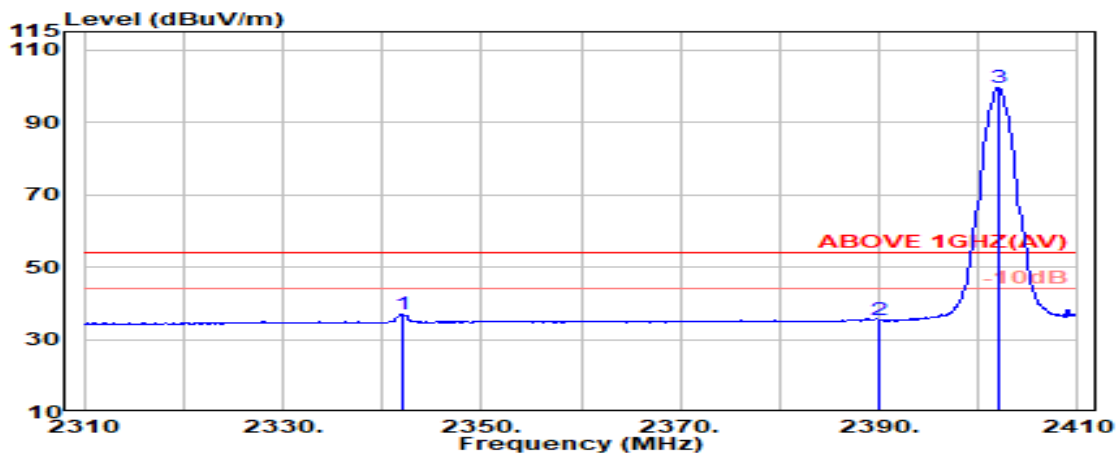


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.12	5.96	39.93	42.84	36.99	54.00	17.01	Average
2390.000	28.20	6.03	39.93	40.90	35.20	54.00	18.80	Average
@ 2402.000	28.21	6.05	39.93	105.31	99.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

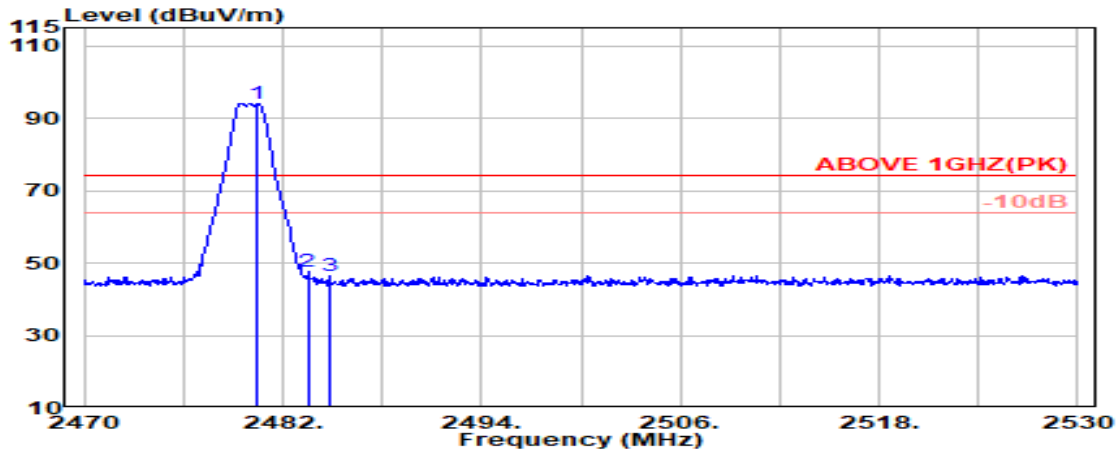

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	99.43	94.13	---	---	Peak
2483.500	28.47	6.17	39.92	53.13	47.84	74.00	26.16	Peak
2484.850	28.47	6.17	39.92	51.85	46.56	74.00	27.44	Peak

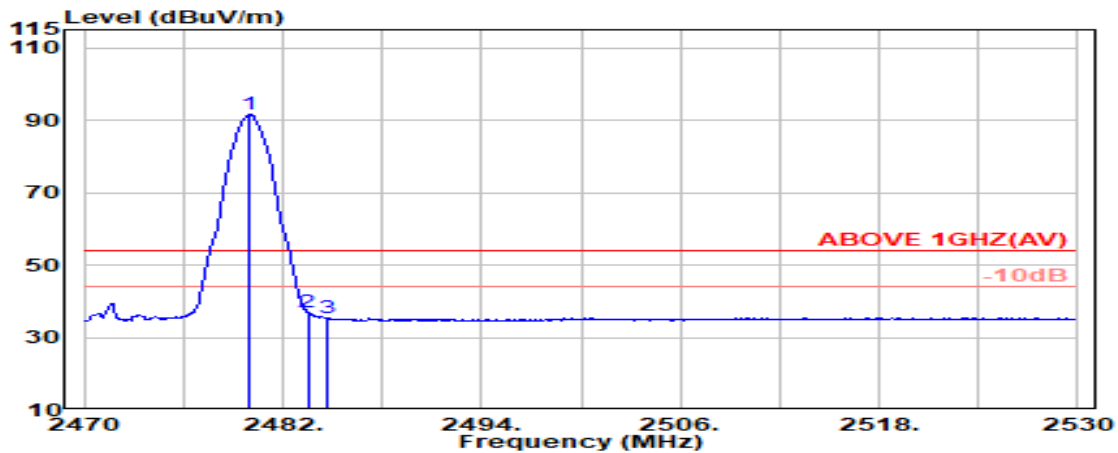


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	97.02	91.72	---	---	Average
2483.500	28.47	6.17	39.92	42.18	36.90	54.00	17.10	Average
2484.700	28.47	6.17	39.92	40.80	35.51	54.00	18.49	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

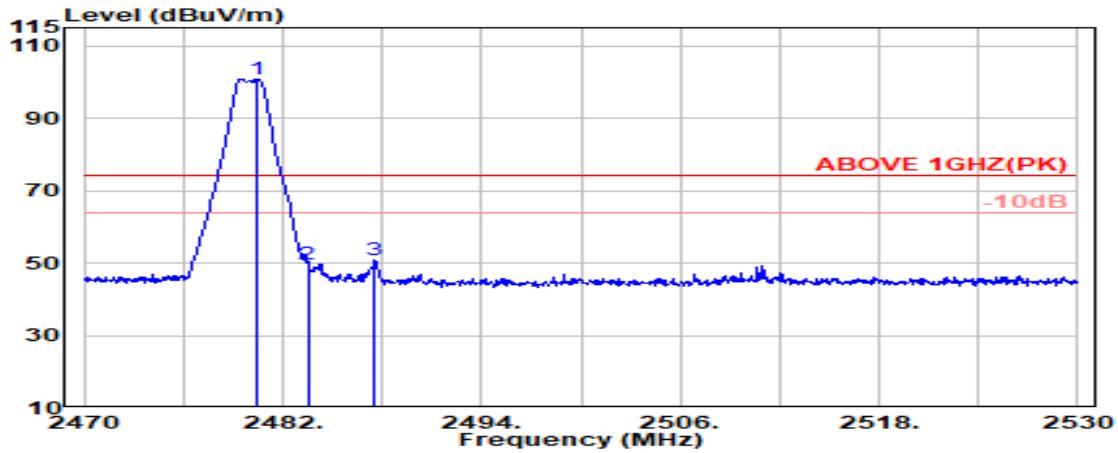

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	106.19	100.89	---	---	Peak
2483.500	28.47	6.17	39.92	55.02	49.73	74.00	24.27	Peak
2487.550	28.48	6.17	39.92	56.28	51.01	74.00	22.99	Peak

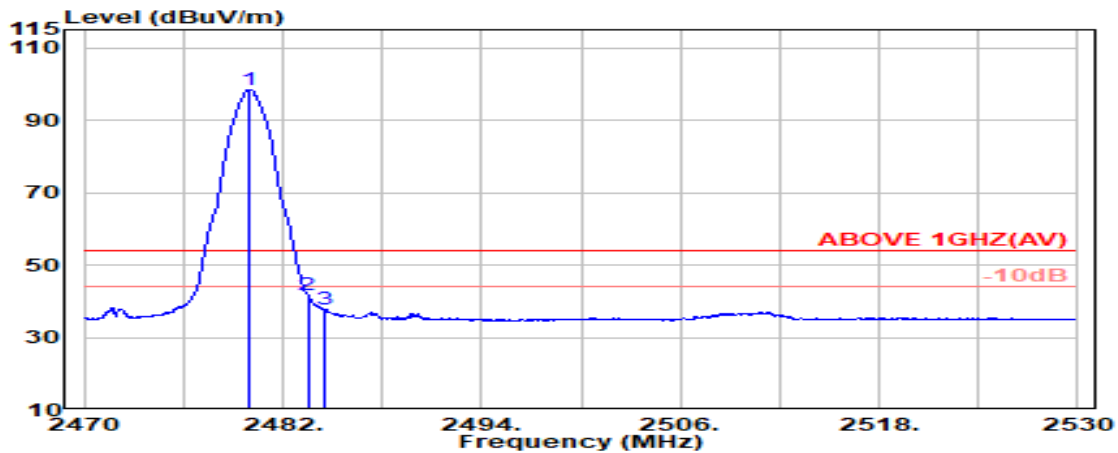


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	103.80	98.50	---	---	Average
2483.500	28.47	6.17	39.92	47.10	41.81	54.00	12.19	Average
2484.500	28.47	6.17	39.92	42.95	37.66	54.00	16.34	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

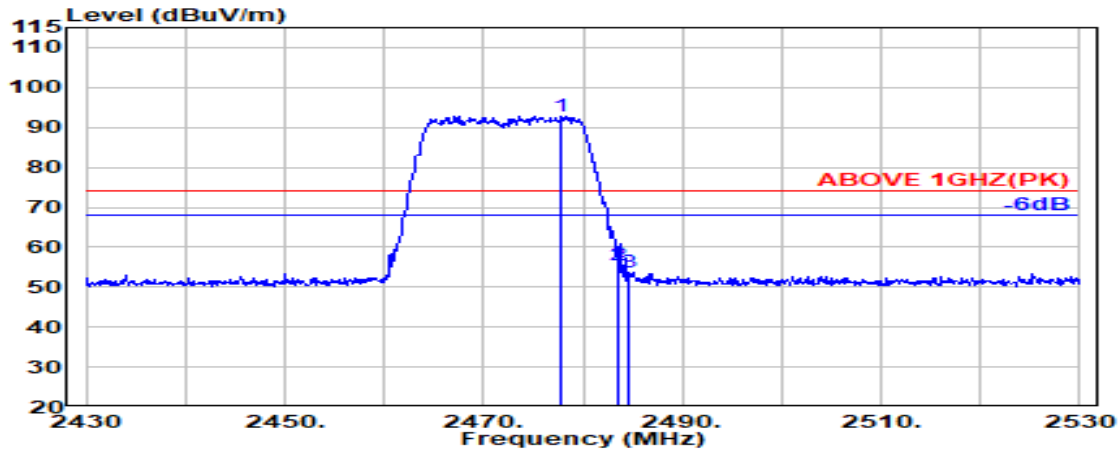

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.900	28.46	6.16	39.92	98.09	92.79	---	---	Peak
2483.500	28.47	6.17	39.92	60.83	55.55	74.00	18.45	Peak
2484.600	28.47	6.17	39.92	58.91	53.63	74.00	20.37	Peak

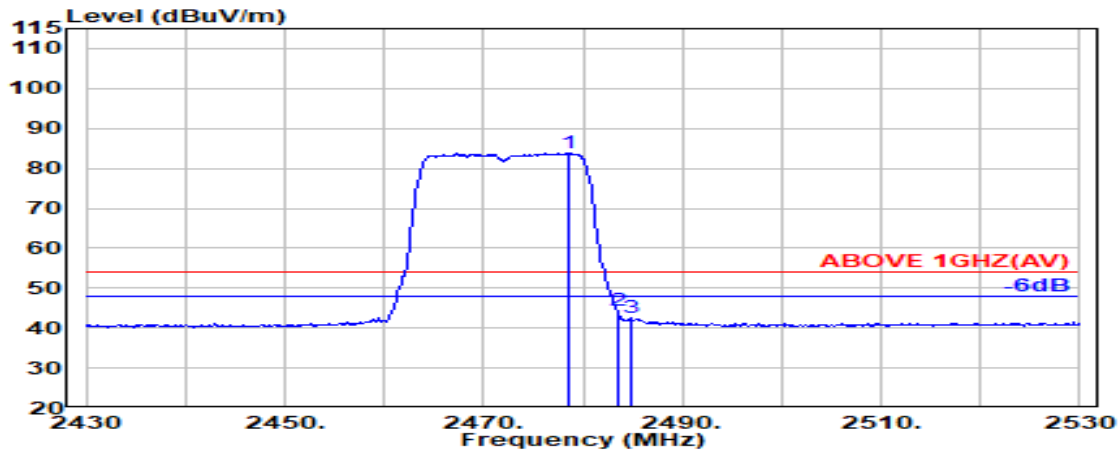


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.46	6.16	39.92	89.18	83.87	---	---	Average
2483.500	28.47	6.17	39.92	49.67	44.38	54.00	9.62	Average
2484.800	28.47	6.17	39.92	47.79	42.51	54.00	11.49	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

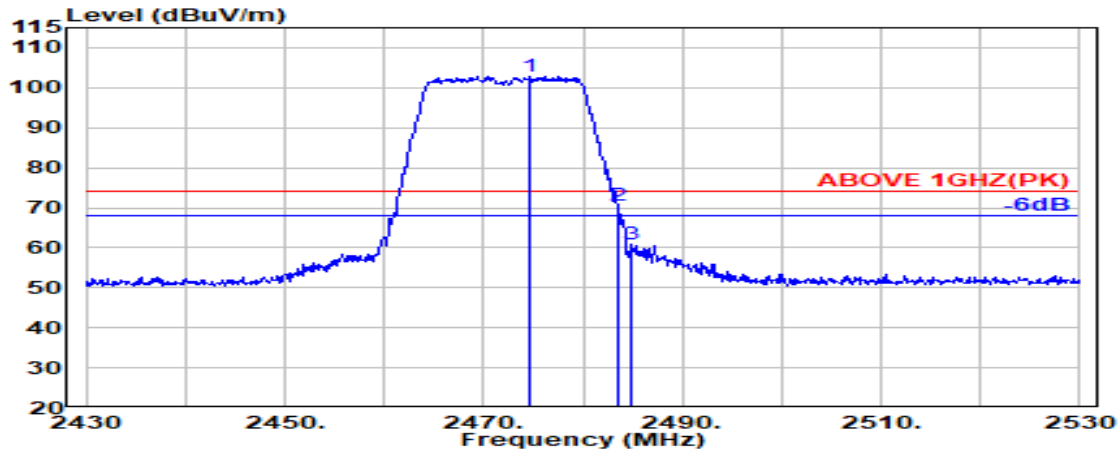

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.700	28.45	6.15	39.92	108.23	102.91	---	---	Peak
2483.500	28.47	6.17	39.92	75.87	70.59	74.00	3.41	Peak
2484.800	28.47	6.17	39.92	66.19	60.91	74.00	13.09	Peak

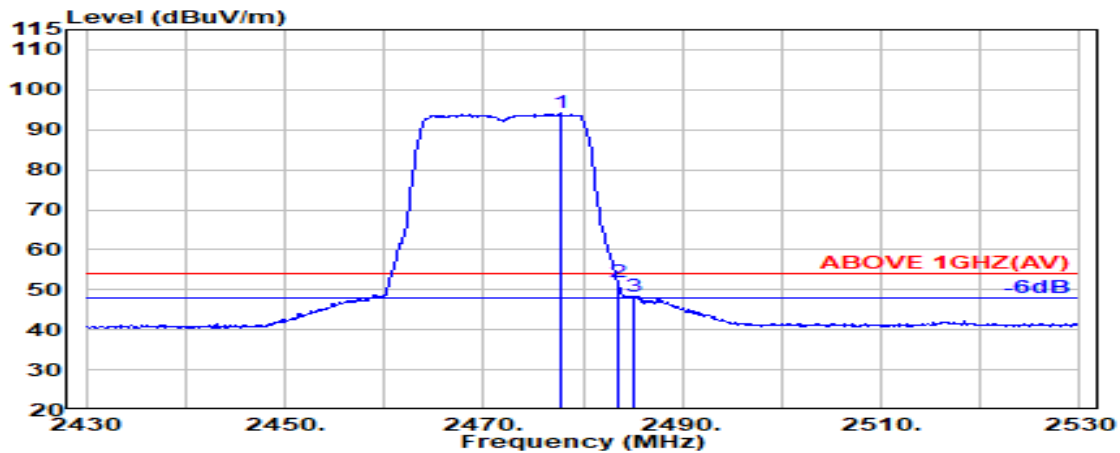


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	28.46	6.16	39.92	99.37	94.06	---	---	Average
2483.500	28.47	6.17	39.92	57.11	51.82	54.00	2.18	Average
2485.000	28.47	6.17	39.92	53.74	48.46	54.00	5.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

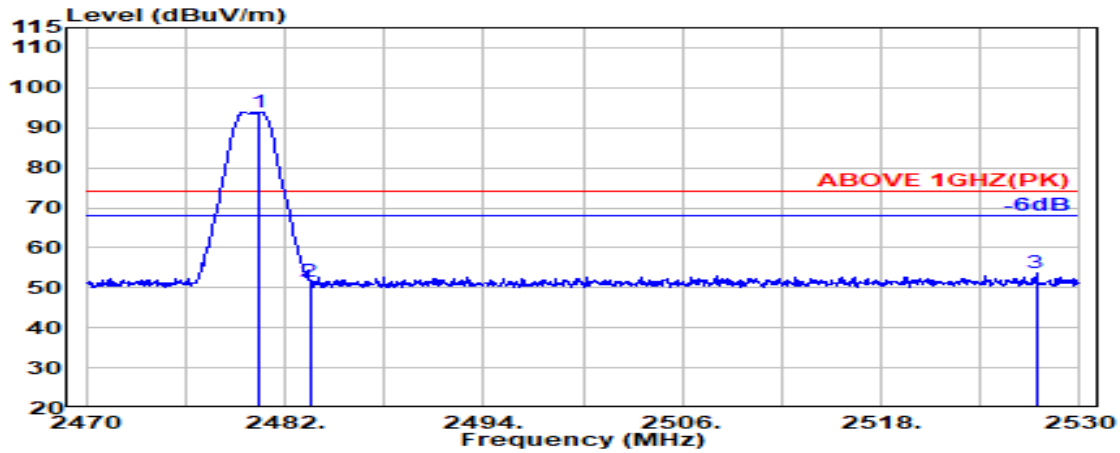

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	39.92	99.31	94.01	---	---	Peak
2483.500	28.47	6.17	39.92	56.77	51.48	74.00	22.52	Peak
2527.350	28.55	6.22	39.92	58.70	53.56	74.00	20.44	Peak

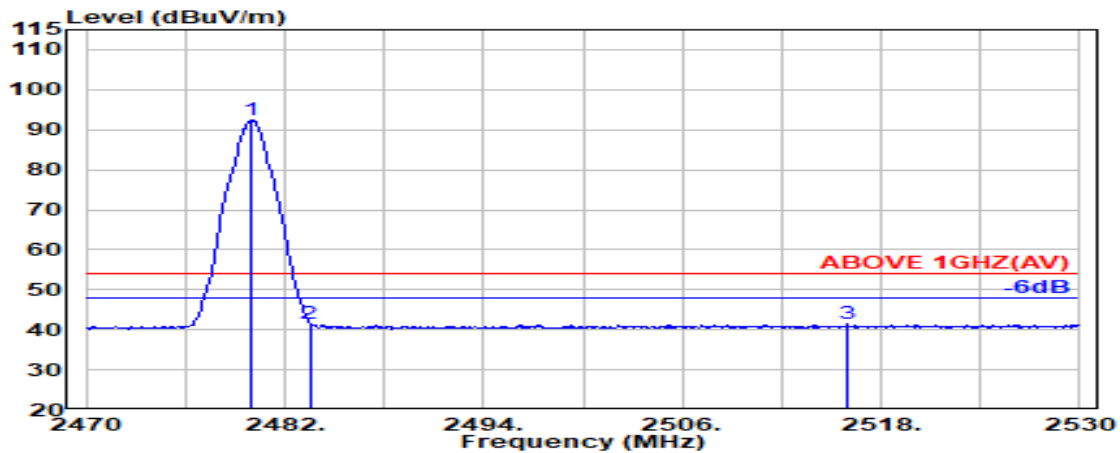


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	97.71	92.41	---	---	Average
2483.500	28.47	6.17	39.92	46.87	41.59	54.00	12.41	Average
2515.950	28.53	6.21	39.92	46.57	41.39	54.00	12.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

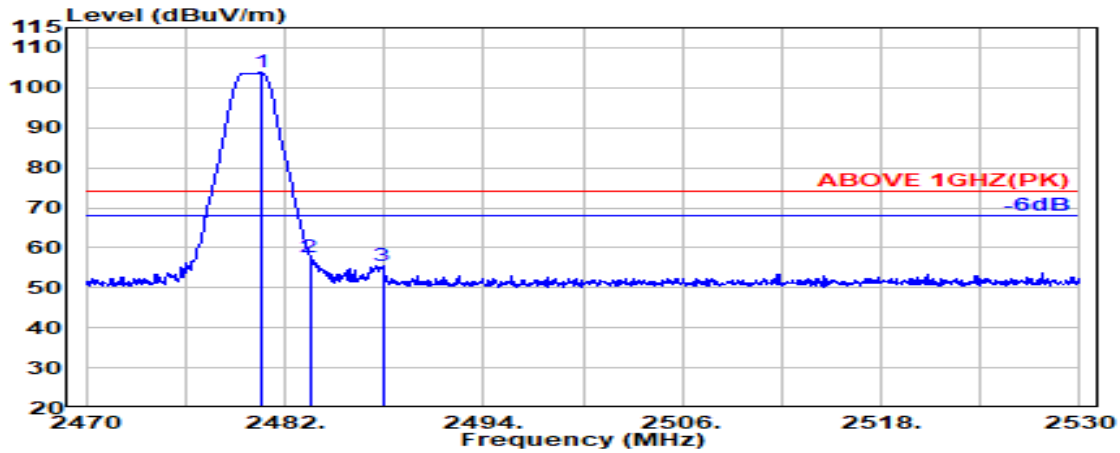

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.550	28.46	6.16	39.92	109.01	103.71	---	---	Peak
2483.500	28.47	6.17	39.92	63.10	57.82	74.00	16.18	Peak
2487.900	28.48	6.17	39.92	60.76	55.49	74.00	18.51	Peak

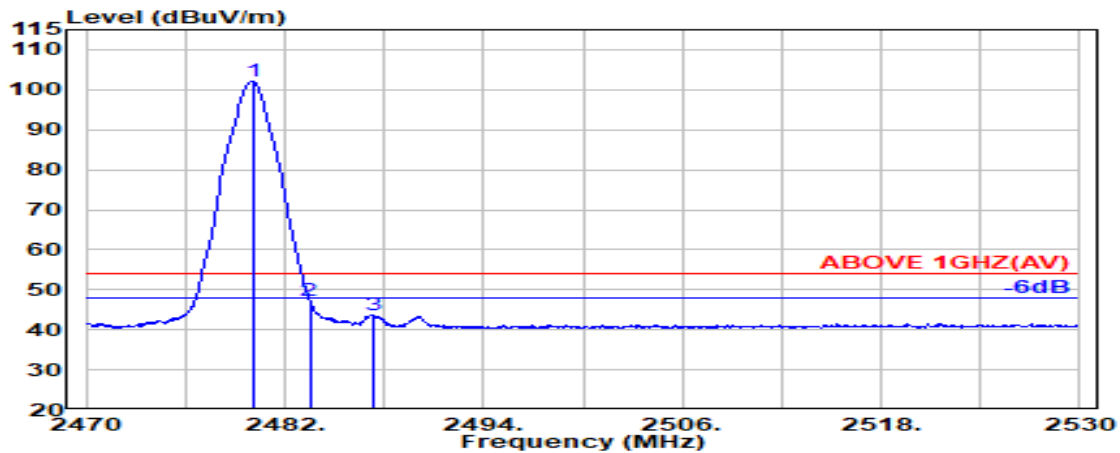


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	39.92	107.46	102.16	---	---	Average
2483.500	28.47	6.17	39.92	52.58	47.30	54.00	6.70	Average
2487.400	28.47	6.17	39.92	48.93	43.65	54.00	10.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

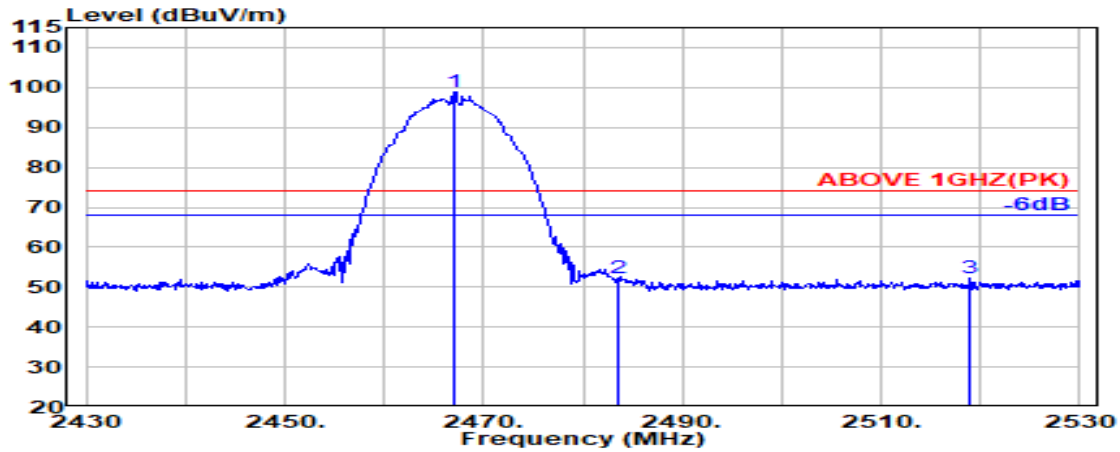

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	6.14	39.92	104.31	98.96	---	---	Peak
2483.500	28.47	6.17	39.92	57.40	52.11	74.00	21.89	Peak
2518.900	28.54	6.21	39.92	57.51	52.34	74.00	21.66	Peak

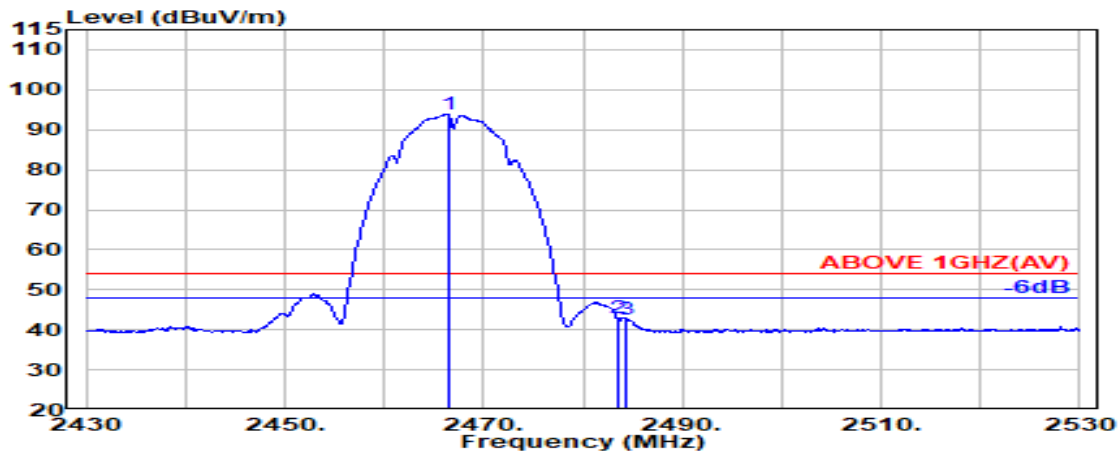


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	6.14	39.92	99.34	93.99	---	---	Average
2483.500	28.47	6.17	39.92	48.05	42.77	54.00	11.23	Average
2484.400	28.47	6.17	39.92	47.87	42.58	54.00	11.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

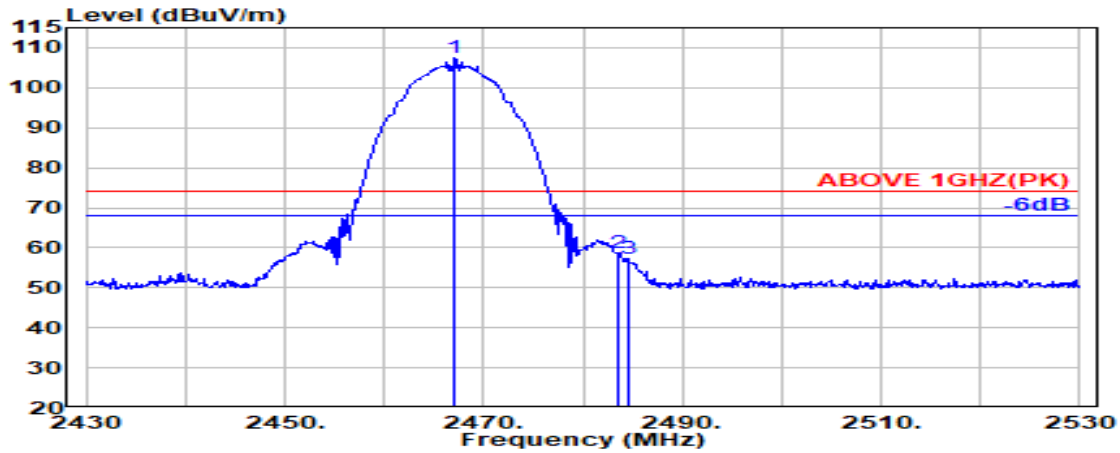

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	28.43	6.14	39.92	112.70	107.36	---	---	Peak
2483.500	28.47	6.17	39.92	63.85	58.57	74.00	15.43	Peak
2484.500	28.47	6.17	39.92	62.47	57.19	74.00	16.81	Peak

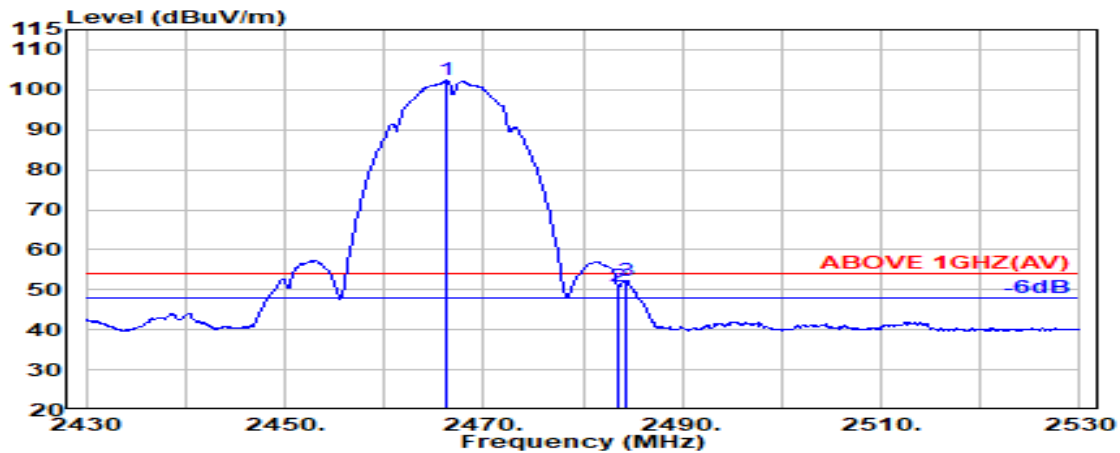


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	6.14	39.92	107.70	102.35	---	---	Average
2483.500	28.47	6.17	39.92	56.21	50.92	54.00	3.08	Average
2484.400	28.47	6.17	39.92	57.53	52.24	54.00	1.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

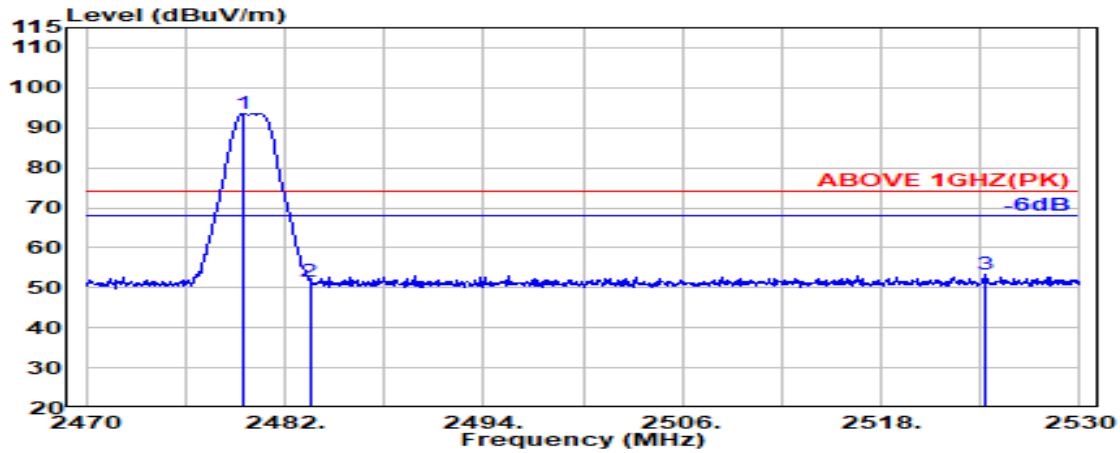

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.46	6.16	39.92	98.87	93.57	---	---	Peak
2483.500	28.47	6.17	39.92	56.79	51.50	74.00	22.50	Peak
2524.300	28.55	6.22	39.92	58.52	53.37	74.00	20.63	Peak

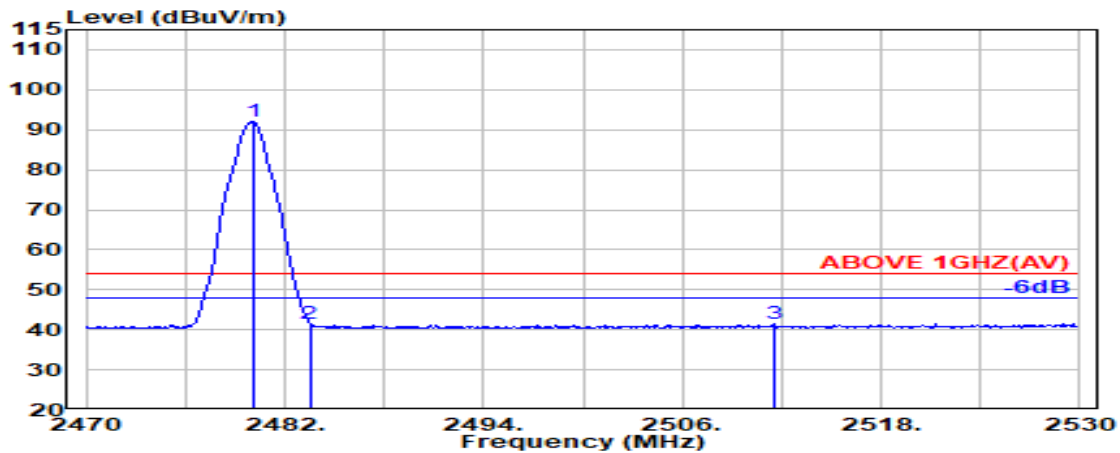


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	39.92	97.37	92.07	---	---	Average
2483.500	28.47	6.17	39.92	46.70	41.41	54.00	12.59	Average
2511.600	28.52	6.20	39.92	46.58	41.39	54.00	12.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

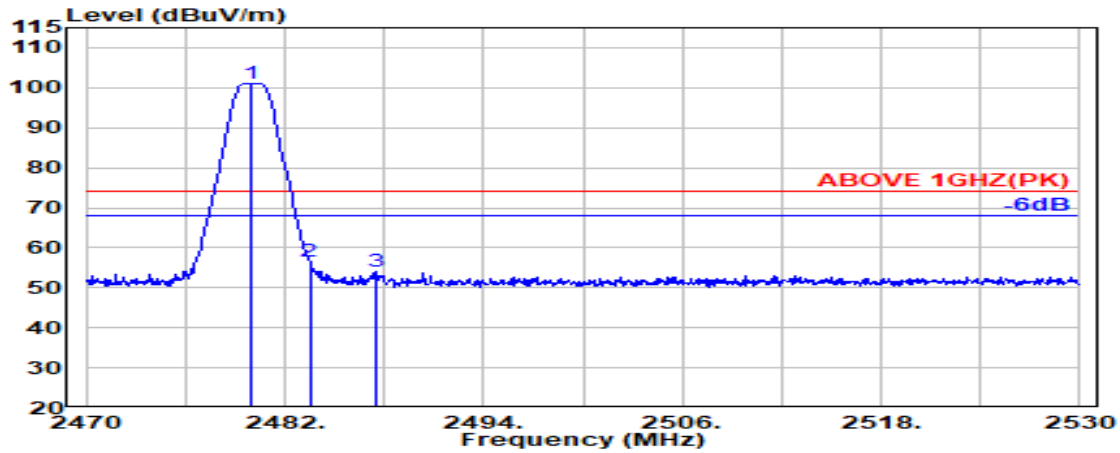

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	106.45	101.15	---	---	Peak
2483.500	28.47	6.17	39.92	61.94	56.65	74.00	17.35	Peak
2487.550	28.48	6.17	39.92	59.21	53.94	74.00	20.06	Peak

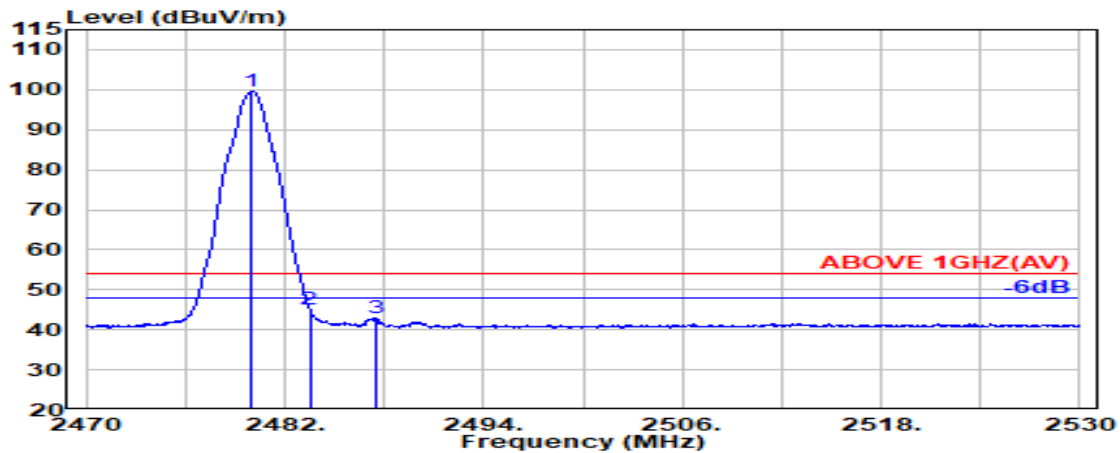

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	39.92	104.93	99.63	---	---	Average
2483.500	28.47	6.17	39.92	50.52	45.23	54.00	8.77	Average
2487.450	28.48	6.17	39.92	48.25	42.98	54.00	11.02	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4934.000	33.64	8.41	39.31	37.51	40.24	54.00	13.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4934.000	33.64	8.41	39.31	39.75	42.48	54.00	11.52	Peak

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.27	8.34	39.36	38.41	40.67	54.00	13.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.27	8.34	39.36	38.87	41.12	54.00	12.88	Peak

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.29	8.35	39.36	37.75	40.04	54.00	13.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.29	8.35	39.36	38.69	40.97	54.00	13.03	Peak

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.40	8.37	39.34	38.01	40.43	54.00	13.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.40	8.37	39.34	38.66	41.08	54.00	12.92	Peak

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.56	8.40	39.32	38.25	40.88	54.00	13.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.56	8.40	39.32	38.60	41.23	54.00	12.77	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.44	8.38	39.34	39.97	42.45	54.00	11.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.44	8.38	39.34	38.89	41.37	54.00	12.63	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz					
------	-------------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	39.37	42.94	45.09	54.00	8.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	39.37	37.88	40.04	54.00	13.96	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz					
------	-------------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	39.34	39.59	42.05	54.00	11.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	39.34	39.82	42.28	54.00	11.72	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz					
------	-------------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	39.30	39.04	41.89	54.00	12.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reader Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	39.30	38.35	41.20	54.00	12.80	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4934.000	33.64	8.41	39.33	41.00	43.71	54.00	10.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4934.000	33.64	8.41	39.33	41.29	44.00	54.00	10.00	Peak

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.27	8.34	39.37	40.62	42.86	54.00	11.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.27	8.34	39.37	41.75	43.99	54.00	10.01	Peak

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.29	8.35	39.37	40.86	43.13	54.00	10.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.29	8.35	39.37	40.95	43.22	54.00	10.78	Peak

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.40	8.37	39.36	41.10	43.51	54.00	10.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.40	8.37	39.36	39.82	42.23	54.00	11.77	Peak

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.56	8.40	39.34	41.43	44.05	54.00	9.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.56	8.40	39.34	41.43	44.04	54.00	9.96	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.44	8.38	39.35	41.77	44.24	54.00	9.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.44	8.38	39.35	42.13	44.59	54.00	9.41	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	39.39	38.71	40.85	54.00	13.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	39.39	40.92	43.07	54.00	10.93	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	39.35	40.53	42.97	54.00	11.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	39.35	40.74	43.18	54.00	10.82	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	39.32	41.41	44.24	54.00	9.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	39.32	40.71	43.53	54.00	10.47	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4933.800	33.64	8.41	39.31	40.68	43.41	54.00	10.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4933.800	33.64	8.41	39.31	39.30	42.03	54.00	11.97	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4803.256	33.21	8.32	39.38	40.82	42.98	54.00	11.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4804.000	33.21	8.32	39.37	42.11	44.27	54.00	9.73	Peak

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.500	33.44	8.38	39.34	39.57	42.05	54.00	11.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.500	33.44	8.38	39.34	40.91	43.39	54.00	10.61	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11437.210	39.17	13.25	39.10	38.35	51.67	54.00	2.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7732.000	36.56	10.17	39.62	38.23	45.34	54.00	8.66	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.