


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>B.1 RADIATED EMISSION</b> .....	<b>6</b>
B.1.1 Emissions within Restricted Frequency Bands.....	6
B.1.2 Emissions outside the frequency band.....	309
B.1.3 Emissions in Non-restricted Frequency Bands.....	341
<b>B.2 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH</b> .....	<b>342</b>
B.2.1 Average Output Power and Emission/Occupied Bandwidth.....	342
B.2.2 Measurement Plots .....	352
<b>B.3 POWER SPECTRAL DENSITY</b> .....	<b>391</b>
B.3.1 Power Spectral Density Result .....	391
B.3.2 Measurement Plots .....	400
<b>B.4 FREQUENCY STABILITY</b> .....	<b>442</b>
B.4.1 Frequency stability Result .....	442

## A.1 CONDUCTED EMISSION

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1 (with INPOAQ ANT)		

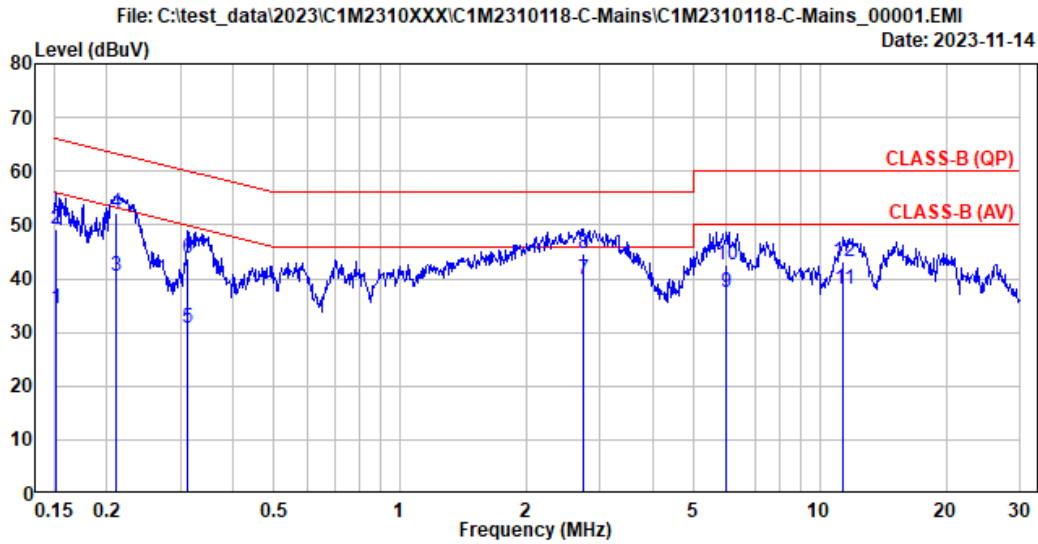

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.30	0.03	9.85	14.37	34.55	55.92	21.37	Average
2	0.152	10.30	0.03	9.85	29.02	49.20	65.92	16.72	QP
3	0.211	10.29	0.03	9.85	20.19	40.36	53.18	12.82	Average
4	0.211	10.29	0.03	9.85	31.99	52.16	63.18	11.02	QP
5	0.312	10.28	0.03	9.85	10.58	30.74	49.91	19.17	Average
6	0.312	10.28	0.03	9.85	23.47	43.63	59.91	16.28	QP
7	2.742	10.34	0.07	9.86	19.58	39.85	46.00	6.15	Average
8	2.742	10.34	0.07	9.86	24.53	44.80	56.00	11.20	QP
9	5.997	10.45	0.10	9.87	17.01	37.43	50.00	12.57	Average
10	5.997	10.45	0.10	9.87	22.22	42.64	60.00	17.36	QP
11	11.407	10.65	0.15	9.90	17.32	38.02	50.00	11.98	Average
12	11.407	10.65	0.15	9.90	22.40	43.10	60.00	16.90	QP

Remarks: 1. Emission Level(dBμV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1 (with INPOAQ ANT)		

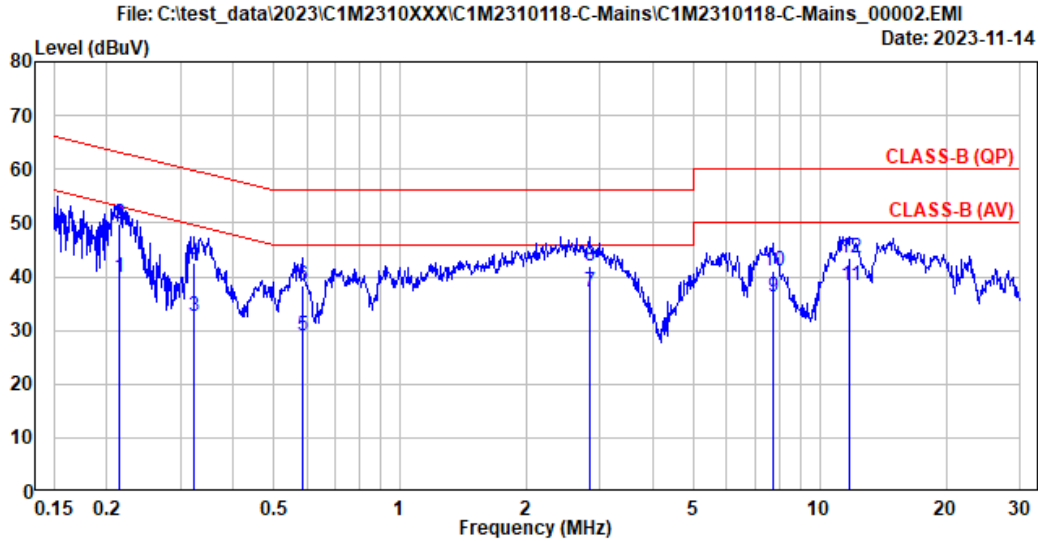

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.215	10.28	0.03	9.85	19.73	39.89	53.02	13.13	Average
2	0.215	10.28	0.03	9.85	29.67	49.83	63.02	13.19	QP
3	0.323	10.27	0.03	9.85	12.59	32.74	49.62	16.88	Average
4	0.323	10.27	0.03	9.85	22.37	42.52	59.62	17.10	QP
5	0.585	10.27	0.03	9.85	8.73	28.88	46.00	17.12	Average
6	0.585	10.27	0.03	9.85	18.06	38.21	56.00	17.79	QP
7	2.825	10.31	0.07	9.86	16.74	36.98	46.00	9.02	Average
8	2.825	10.31	0.07	9.86	21.64	41.88	56.00	14.12	QP
9	7.771	10.42	0.12	9.88	15.74	36.16	50.00	13.84	Average
10	7.771	10.42	0.12	9.88	20.68	41.10	60.00	18.90	QP
11	11.812	10.52	0.15	9.90	17.69	38.26	50.00	11.74	Average
12	11.812	10.52	0.15	9.90	22.80	43.37	60.00	16.63	QP

Remarks: 1. Emission Level(dBμV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

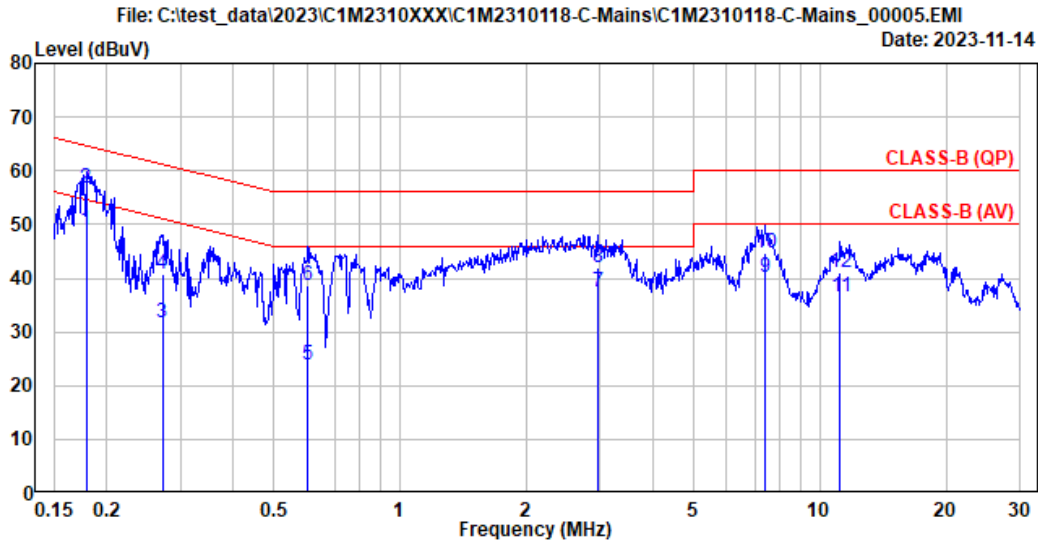

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.179	10.29	0.03	9.85	28.73	48.90	54.55	5.65	Average
2	0.179	10.29	0.03	9.85	36.61	56.78	64.55	7.77	QP
3	0.271	10.29	0.03	9.85	11.46	31.63	51.07	19.44	Average
4	0.271	10.29	0.03	9.85	20.65	40.82	61.07	20.25	QP
5	0.603	10.28	0.03	9.85	3.68	23.84	46.00	22.16	Average
6	0.603	10.28	0.03	9.85	18.49	38.65	56.00	17.35	QP
7	2.955	10.34	0.07	9.86	17.15	37.42	46.00	8.58	Average
8	2.955	10.34	0.07	9.86	21.62	41.89	56.00	14.11	QP
9	7.430	10.50	0.11	9.87	19.72	40.20	50.00	9.80	Average
10	7.430	10.50	0.11	9.87	24.29	44.77	60.00	15.23	QP
11	11.182	10.64	0.15	9.90	15.69	36.38	50.00	13.62	Average
12	11.182	10.64	0.15	9.90	20.48	41.17	60.00	18.83	QP

Remarks: 1. Emission Level(dBμV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

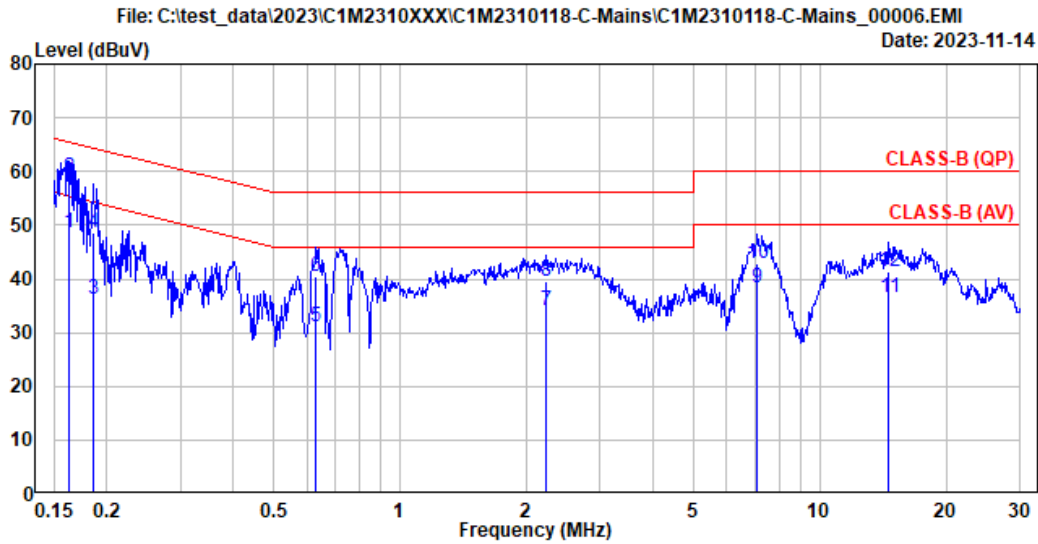

Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 17290SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.163	10.29	0.03	9.85	28.57	48.74	55.30	6.56	Average
2	0.163	10.29	0.03	9.85	38.56	58.73	65.30	6.57	QP
3	0.186	10.29	0.03	9.85	15.92	36.09	54.22	18.13	Average
4	0.186	10.29	0.03	9.85	28.40	48.57	64.22	15.65	QP
5	0.630	10.27	0.03	9.85	11.02	31.17	46.00	14.83	Average
6	0.630	10.27	0.03	9.85	20.23	40.38	56.00	15.62	QP
7	2.224	10.30	0.06	9.86	13.85	34.07	46.00	11.93	Average
8	2.224	10.30	0.06	9.86	19.39	39.61	56.00	16.39	QP
9	7.069	10.41	0.11	9.87	17.82	38.21	50.00	11.79	Average
10	7.069	10.41	0.11	9.87	22.58	42.97	60.00	17.03	QP
11	14.636	10.60	0.17	9.91	15.78	36.46	50.00	13.54	Average
12	14.636	10.60	0.17	9.91	20.65	41.33	60.00	18.67	QP

Remarks: 1. Emission Level(dBµV)= ISN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

## A.2 RADIATED EMISSION

Test Date	2023/10/17 ~ 11/14	Temp./Hum.	24 ~ 26°C/53 ~56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	30.58	28.92	40.00	11.08	Peak
159.333	16.03	2.97	25.97	42.02	35.05	43.50	8.45	Peak
220.767	16.52	3.61	25.77	42.92	37.27	46.00	8.73	Peak
552.992	23.80	6.60	27.30	32.71	35.81	46.00	10.19	Peak
942.608	26.55	8.96	26.92	33.20	41.79	46.00	4.21	Peak
962.008	26.68	9.07	26.86	32.45	41.33	54.00	12.67	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	33.39	32.02	40.00	7.98	Peak
78.500	12.89	2.02	26.37	44.10	32.64	40.00	7.36	Peak
160.950	15.97	2.99	25.97	39.08	32.07	43.50	11.43	Peak
424.467	21.98	5.75	26.68	34.64	35.68	46.00	10.32	Peak
940.992	26.53	8.95	26.92	32.62	41.18	46.00	4.82	Peak
991.917	26.90	9.23	26.78	32.43	41.77	54.00	12.23	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	32.13	30.76	40.00	9.24	Peak
123.767	17.73	2.58	26.16	36.27	30.42	43.50	13.08	Peak
401.025	21.58	5.52	26.52	33.50	34.09	46.00	11.91	Peak
631.400	24.45	6.94	27.41	32.91	36.89	46.00	9.11	Peak
921.592	26.39	8.84	26.98	32.82	41.07	46.00	4.93	Peak
974.942	26.78	9.14	26.83	33.14	42.23	54.00	11.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	36.74	35.08	40.00	4.92	Peak
135.083	17.34	2.71	26.09	39.42	33.37	43.50	10.13	Peak
428.508	22.04	5.78	26.71	34.94	36.05	46.00	9.95	Peak
709.000	24.72	7.36	27.39	32.86	37.56	46.00	8.44	Peak
936.950	26.50	8.93	26.93	32.38	40.88	46.00	5.12	Peak
999.192	26.95	9.27	26.76	32.19	41.64	54.00	12.36	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	31.06	28.05	40.00	11.95	Peak
117.300	17.74	2.50	26.19	34.77	28.82	43.50	14.68	Peak
163.375	15.88	3.01	25.96	41.59	34.53	43.50	8.97	Peak
223.192	16.67	3.63	25.77	41.73	36.26	46.00	9.74	Peak
654.033	24.53	7.06	27.40	31.85	36.04	46.00	9.96	Peak
971.708	26.75	9.12	26.84	30.83	39.86	54.00	14.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	33.02	30.01	40.00	9.99	Peak
76.883	12.77	2.00	26.38	43.87	32.26	40.00	7.74	Peak
159.333	16.03	2.97	25.97	38.56	31.59	43.50	11.91	Peak
409.108	21.72	5.60	26.58	32.81	33.56	46.00	12.44	Peak
689.600	24.66	7.25	27.40	31.65	36.16	46.00	9.84	Peak
883.600	26.04	8.60	27.08	32.28	39.84	46.00	6.16	Peak



Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	30.33	28.96	40.00	11.04	Peak
159.333	16.03	2.97	25.97	42.29	35.32	43.50	8.18	Peak
218.342	16.38	3.58	25.78	42.45	36.64	46.00	9.36	Peak
528.742	23.50	6.51	27.24	33.38	36.16	46.00	9.84	Peak
887.642	26.09	8.63	27.07	33.67	41.32	46.00	4.68	Peak
992.725	26.91	9.23	26.78	32.03	41.39	54.00	12.61	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	31.54	30.17	40.00	9.83	Peak
76.075	12.70	1.98	26.38	40.43	28.73	40.00	11.27	Peak
161.758	15.94	3.00	25.96	39.10	32.07	43.50	11.43	Peak
423.658	21.97	5.74	26.68	34.07	35.10	46.00	10.90	Peak
772.050	24.91	7.78	27.31	32.87	38.25	46.00	7.75	Peak
985.450	26.85	9.19	26.80	32.33	41.58	54.00	12.42	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

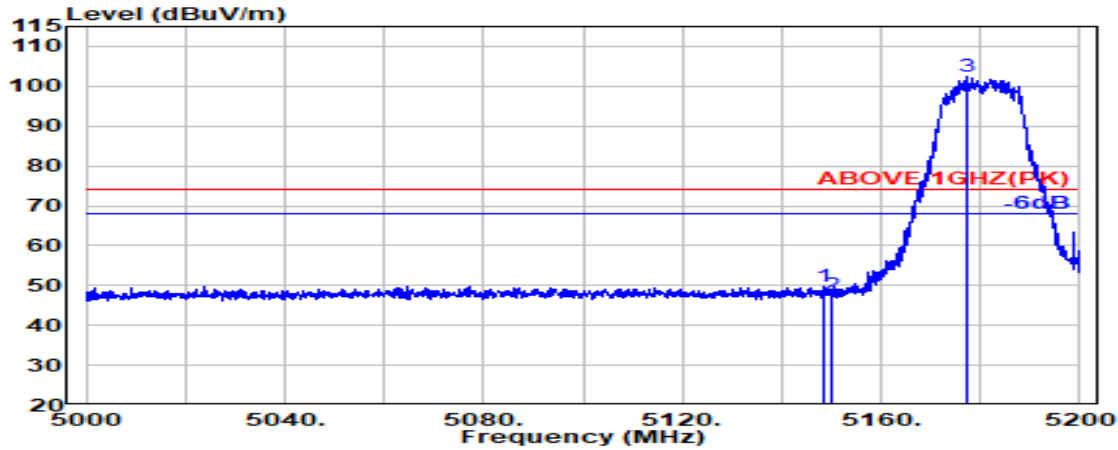

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.27	46.38	49.84	74.00	24.16	Peak
5150.000	34.20	8.54	39.27	44.26	47.73	74.00	26.27	Peak
@ 5177.500	34.26	8.56	39.27	98.88	102.42	---	---	Peak

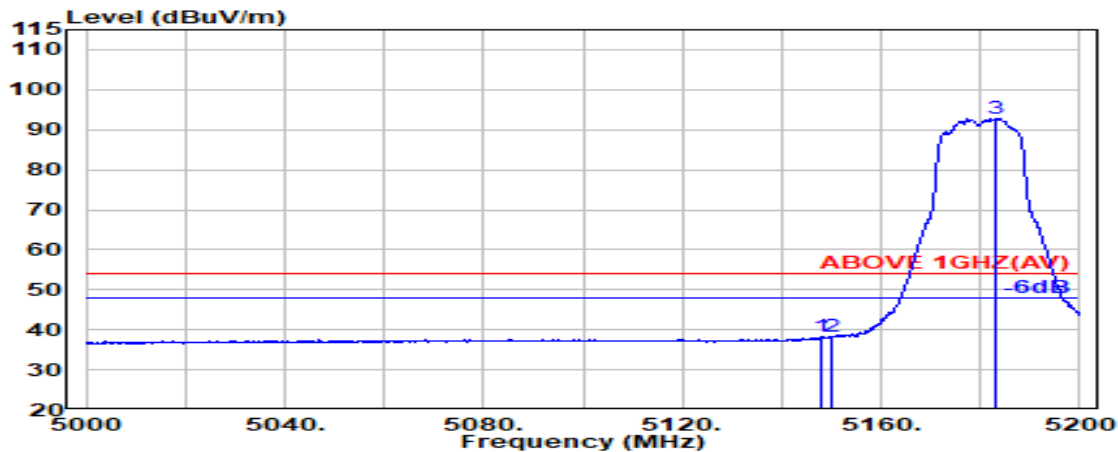


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.19	8.54	39.27	34.68	38.14	54.00	15.86	Average
5150.000	34.20	8.54	39.27	34.65	38.12	54.00	15.88	Average
@ 5182.900	34.27	8.56	39.27	89.38	92.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

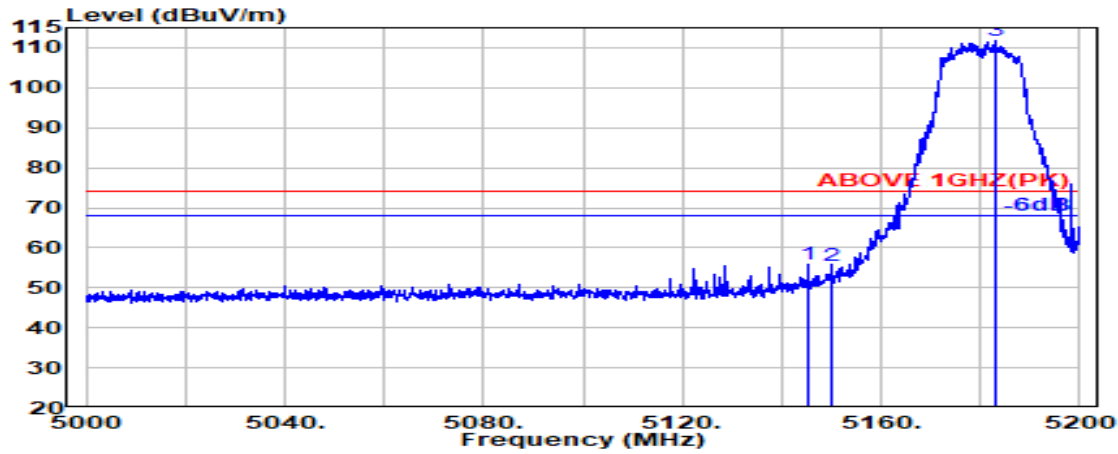

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.200	34.18	8.54	39.27	52.56	56.01	74.00	17.99	Peak
5150.000	34.20	8.54	39.27	52.16	55.64	74.00	18.36	Peak
@ 5182.900	34.27	8.56	39.27	108.16	111.72	---	---	Peak

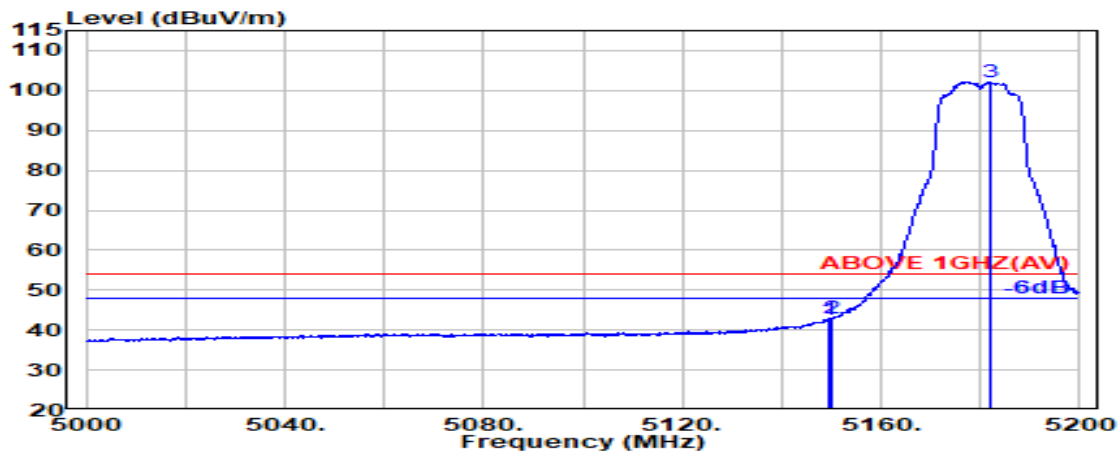


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	8.54	39.27	39.26	42.73	54.00	11.27	Average
5150.000	34.20	8.54	39.27	39.49	42.97	54.00	11.03	Average
@ 5181.900	34.26	8.56	39.27	98.66	102.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

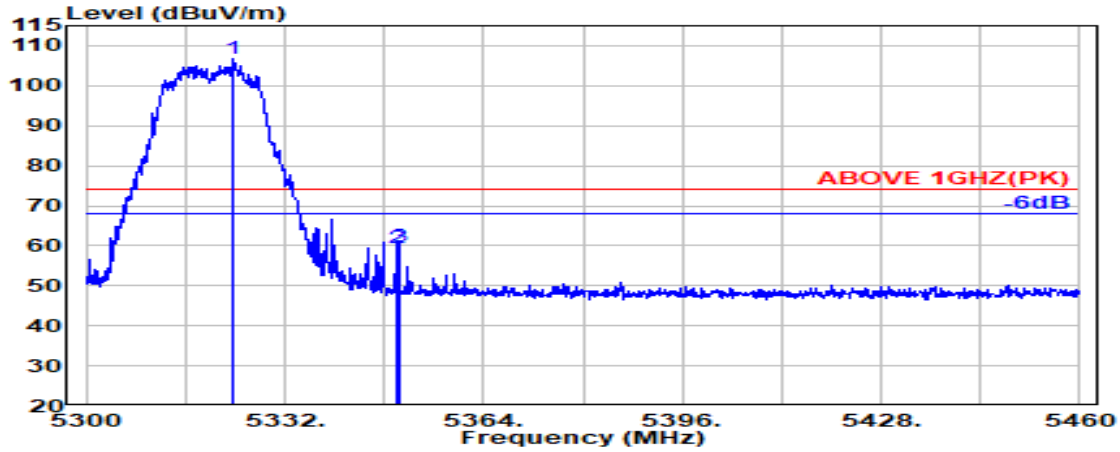

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.55	8.65	39.26	102.74	106.68	---	---	Peak
5350.000	34.50	8.67	39.26	55.62	59.53	74.00	14.47	Peak
5350.400	34.50	8.67	39.26	55.79	59.70	74.00	14.30	Peak

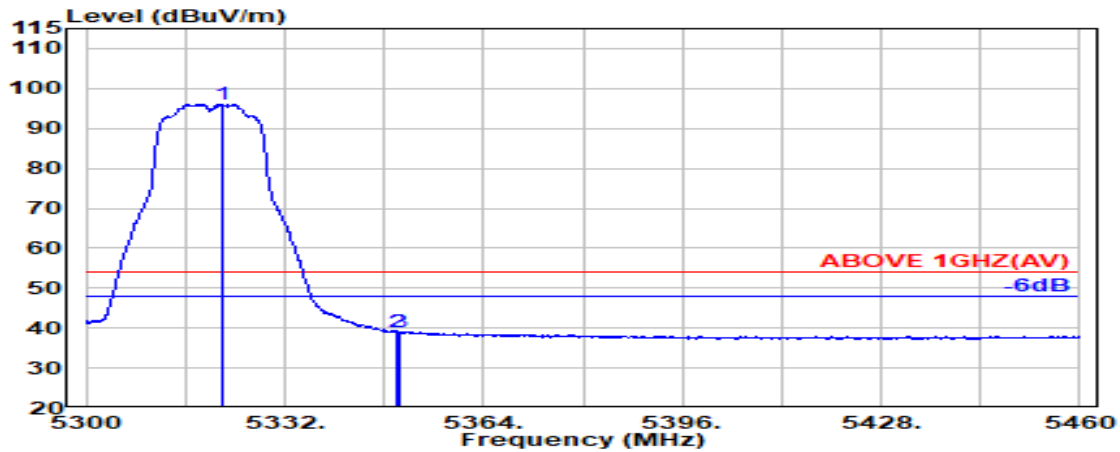


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	34.56	8.65	39.26	92.06	96.01	---	---	Average
5350.000	34.50	8.67	39.26	35.27	39.17	54.00	14.83	Average
5350.600	34.50	8.67	39.26	35.17	39.08	54.00	14.92	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

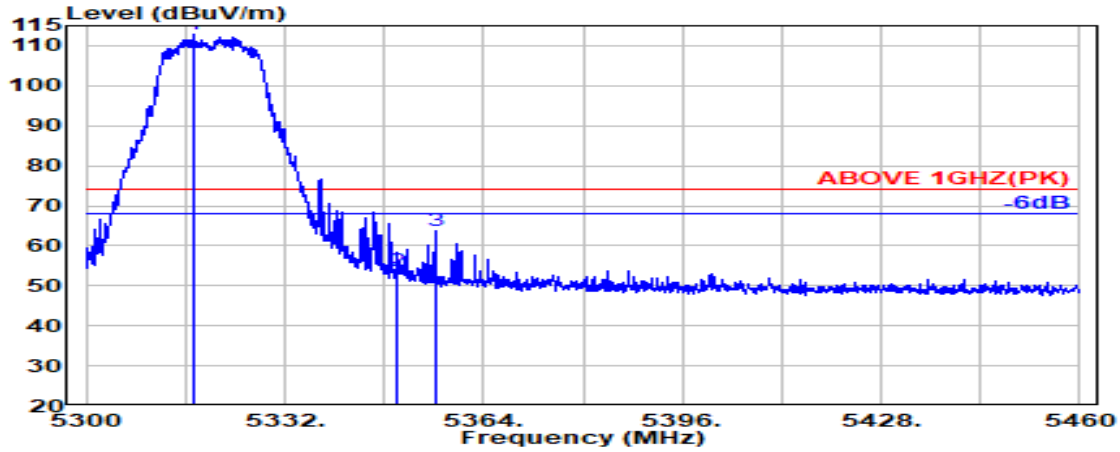

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.57	8.65	39.26	108.82	112.77	---	---	Peak
5350.000	34.50	8.67	39.26	49.71	53.61	74.00	20.39	Peak
5356.300	34.51	8.67	39.26	59.95	63.87	74.00	10.13	Peak

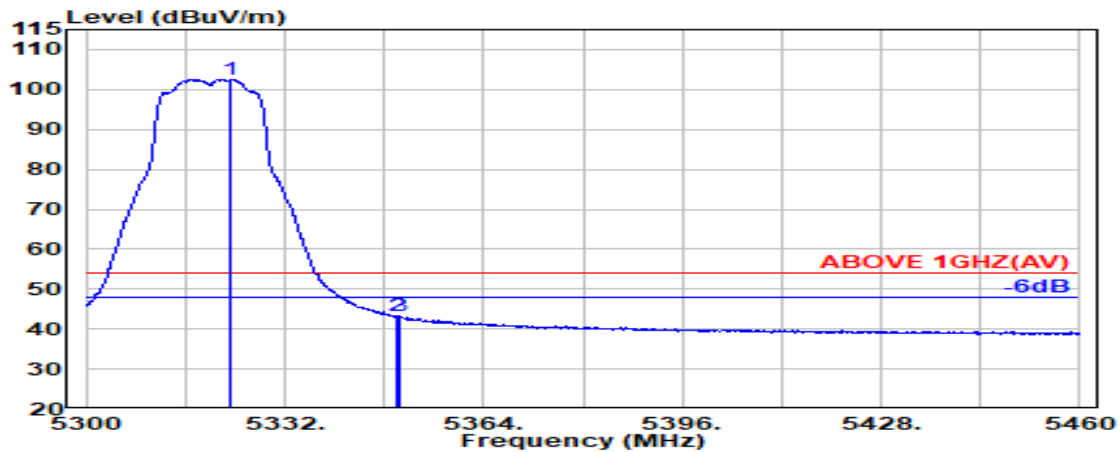


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.300	34.55	8.65	39.26	98.64	102.58	---	---	Average
5350.000	34.50	8.67	39.26	39.29	43.20	54.00	10.80	Average
5350.600	34.50	8.67	39.26	39.52	43.43	54.00	10.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

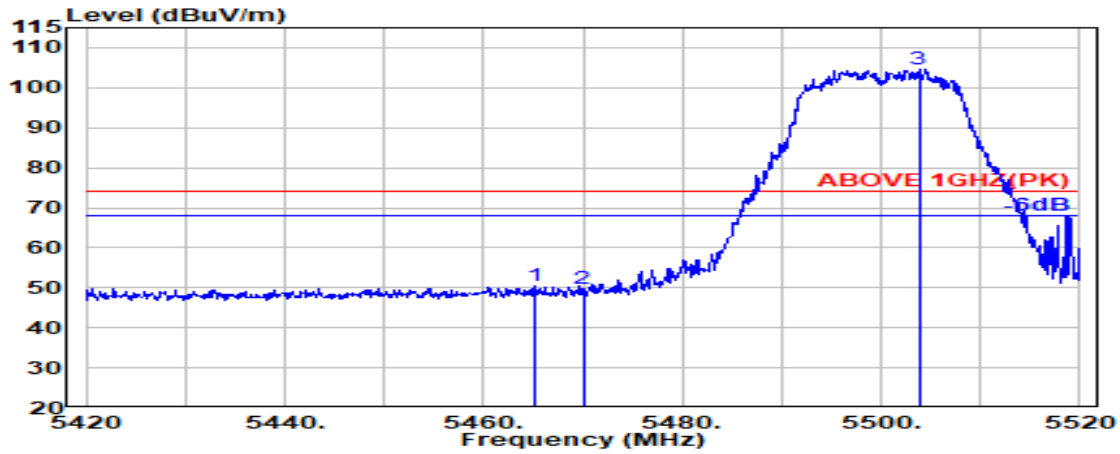

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.76	8.73	39.25	46.16	50.40	74.00	23.60	Peak
5470.000	34.78	8.74	39.25	45.60	49.86	74.00	24.14	Peak
@ 5503.800	34.89	8.76	39.25	100.21	104.60	---	---	Peak

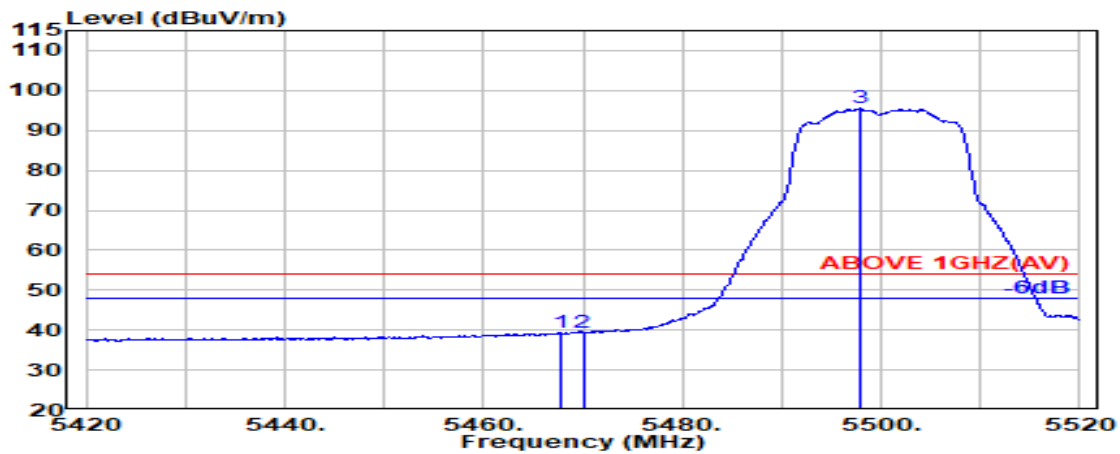


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.77	8.73	39.25	35.08	39.34	54.00	14.66	Average
5470.000	34.78	8.74	39.25	35.05	39.31	54.00	14.69	Average
@ 5498.000	34.89	8.75	39.25	91.21	95.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

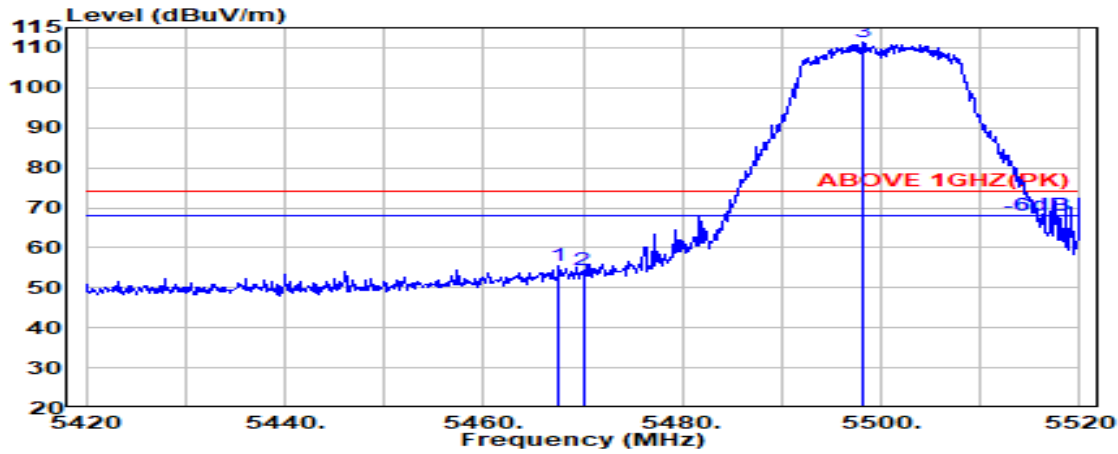

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.77	8.73	39.25	51.11	55.37	74.00	18.63	Peak
5470.000	34.78	8.74	39.25	50.27	54.53	74.00	19.47	Peak
@ 5498.100	34.89	8.75	39.25	106.88	111.27	---	---	Peak

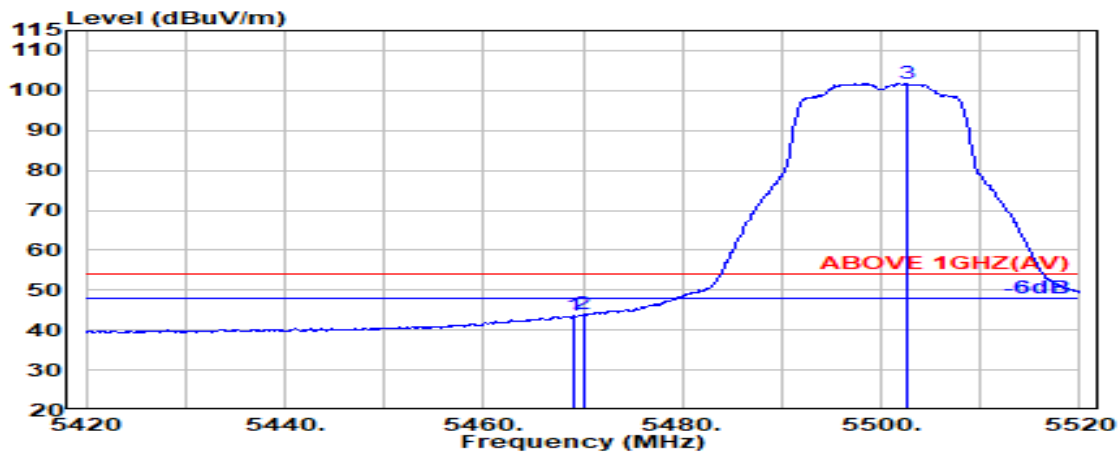


Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	39.26	43.52	54.00	10.48	Average
5470.000	34.78	8.74	39.25	39.58	43.84	54.00	10.16	Average
@ 5502.500	34.89	8.75	39.25	97.34	101.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

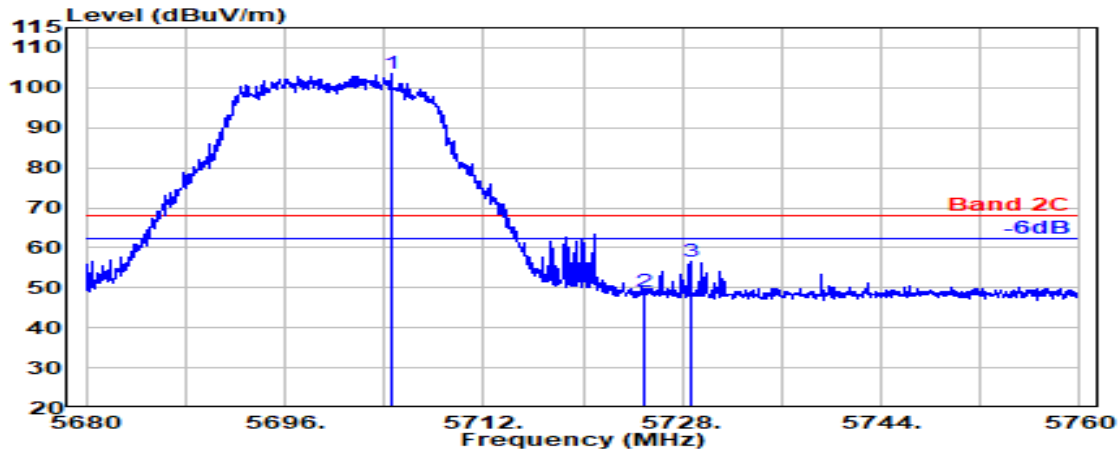
**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.600	34.41	8.87	39.29	99.40	103.39	---	---	Peak
5725.000	34.45	8.88	39.29	44.99	49.03	68.20	19.17	Peak
5728.750	34.46	8.88	39.29	52.57	56.62	68.20	11.58	Peak

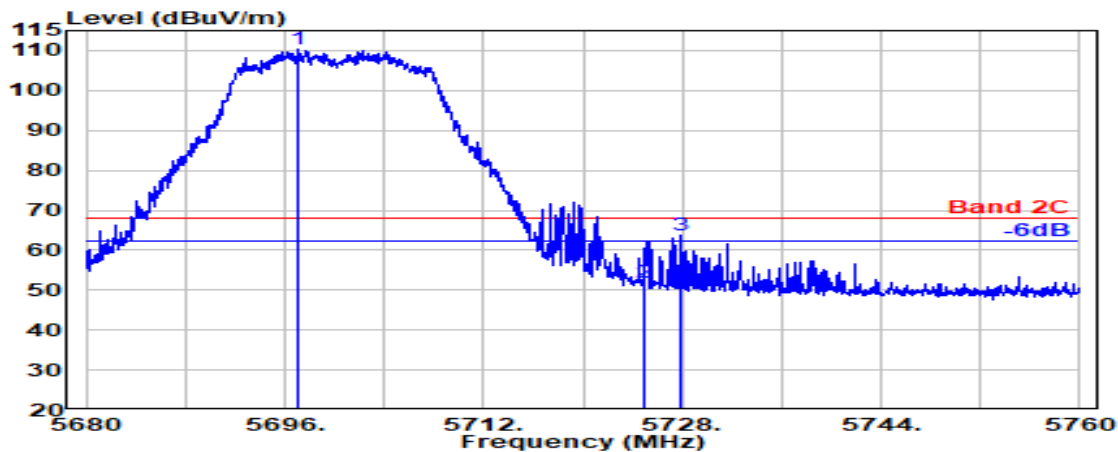

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.100	34.41	8.87	39.29	106.31	110.30	---	---	Peak
5725.000	34.45	8.88	39.29	47.70	51.74	68.20	16.46	Peak
5727.950	34.46	8.88	39.29	59.74	63.79	68.20	4.41	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

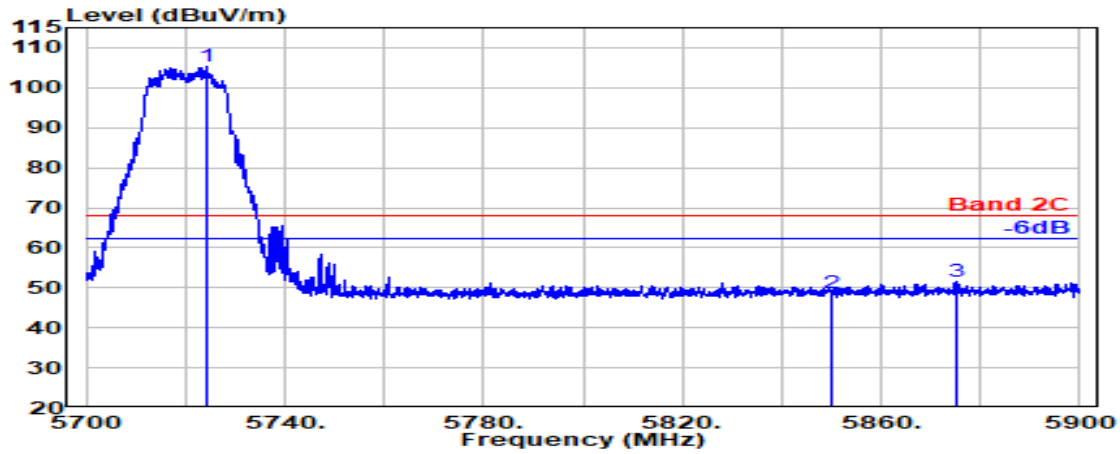

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.400	34.45	8.88	39.29	101.32	105.35	---	---	Peak
5850.000	34.70	8.95	39.31	44.21	48.55	68.20	19.65	Peak
5875.000	34.75	8.96	39.32	47.00	51.40	68.20	16.80	Peak

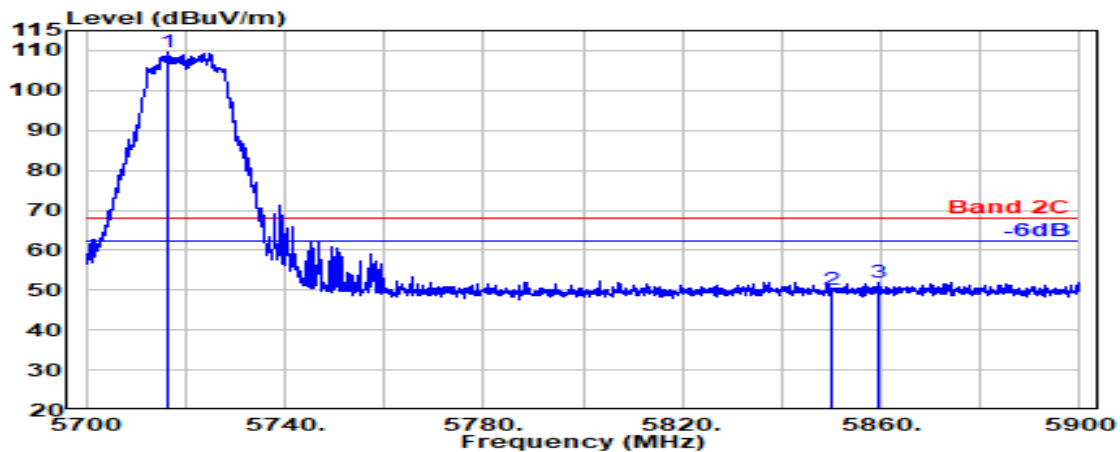


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.200	34.43	8.88	39.29	105.66	109.68	---	---	Peak
5850.000	34.70	8.95	39.31	45.93	50.26	68.20	17.94	Peak
5859.500	34.72	8.95	39.32	47.59	51.95	68.20	16.25	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

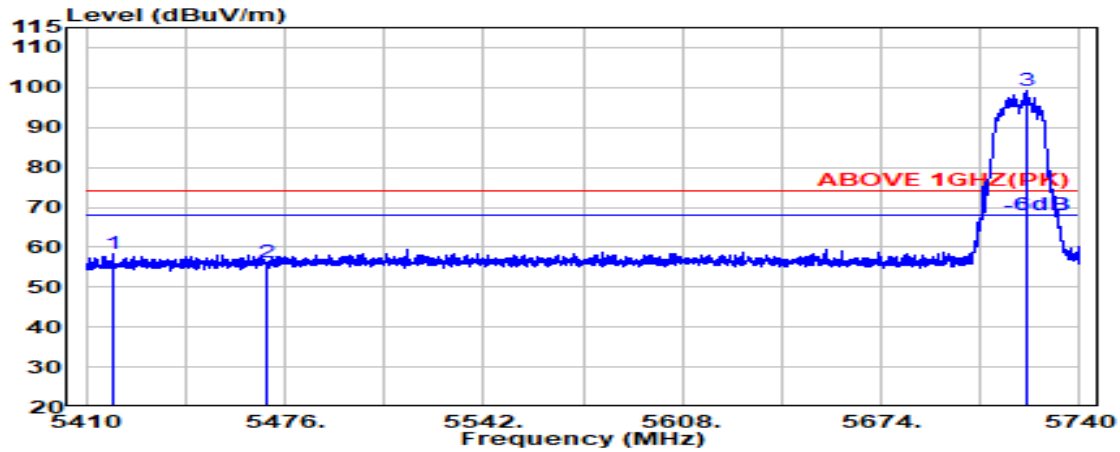

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.75	8.73	39.25	46.17	50.40	74.00	23.60	Peak
5470.000	34.78	8.74	39.25	43.78	48.05	74.00	25.95	Peak
@ 5724.300	34.45	8.88	39.29	98.80	102.84	---	---	Peak

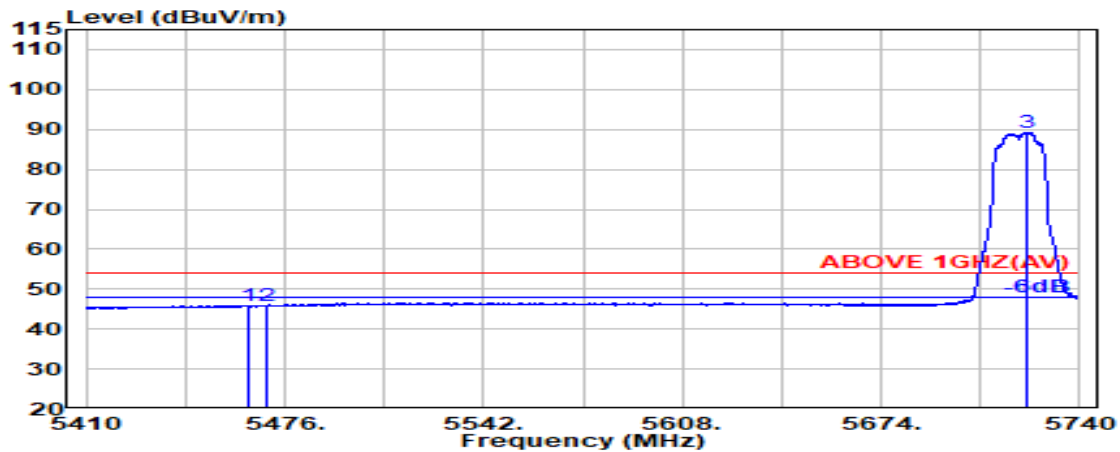


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.73	8.73	39.25	33.42	37.63	54.00	16.37	Average
5470.000	34.78	8.74	39.25	33.18	37.44	54.00	16.56	Average
@ 5717.200	34.43	8.88	39.29	90.08	94.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

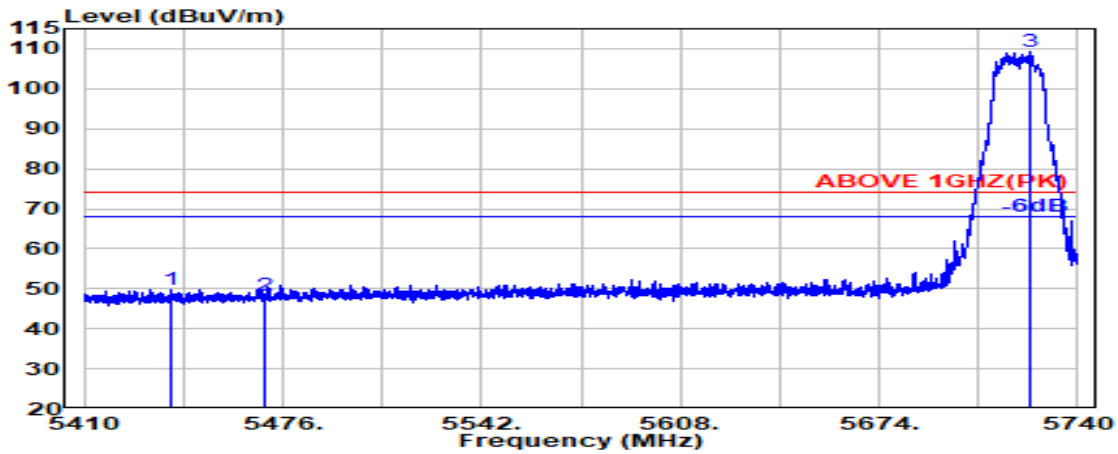

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.000	34.68	8.72	39.25	45.71	49.85	74.00	24.15	Peak
5470.000	34.78	8.74	39.25	44.10	48.36	74.00	25.64	Peak
@ 5724.100	34.45	8.88	39.29	105.25	109.28	---	---	Peak

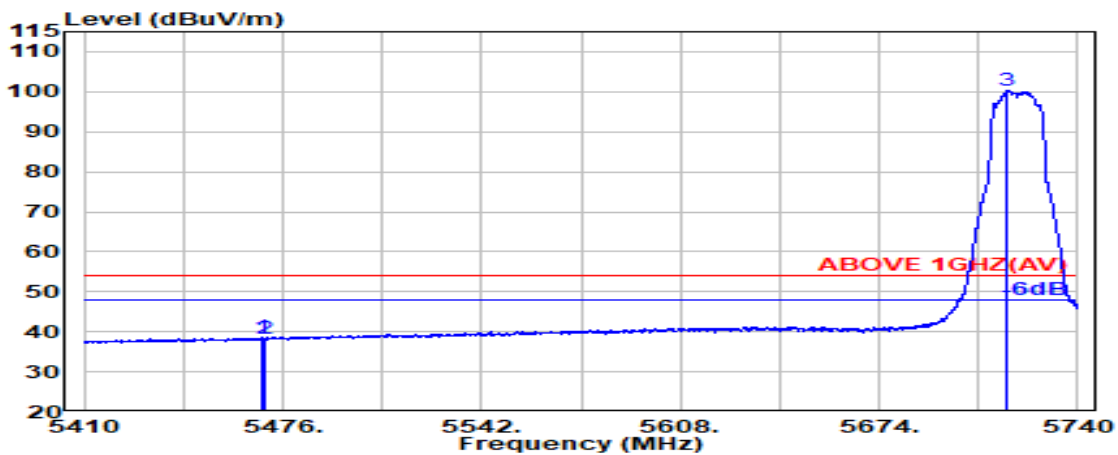


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	34.24	38.50	54.00	15.50	Average
5470.000	34.78	8.74	39.25	34.10	38.37	54.00	15.63	Average
@ 5716.700	34.43	8.88	39.29	96.22	100.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

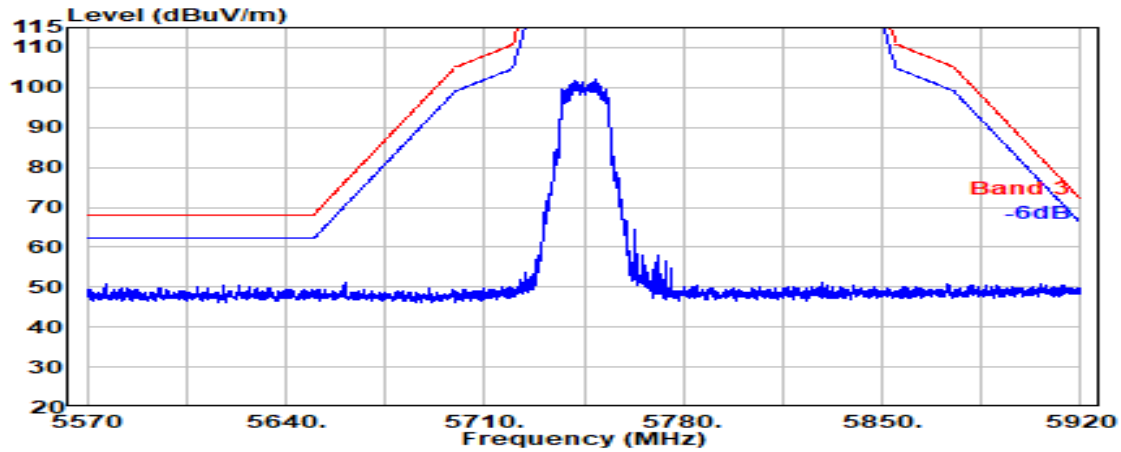


## Antenna at Vertical Polarization

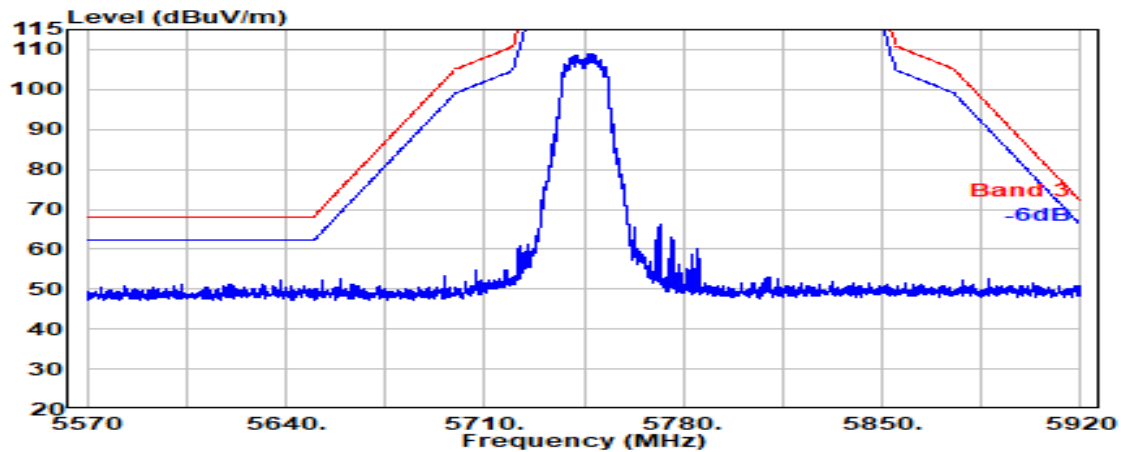


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

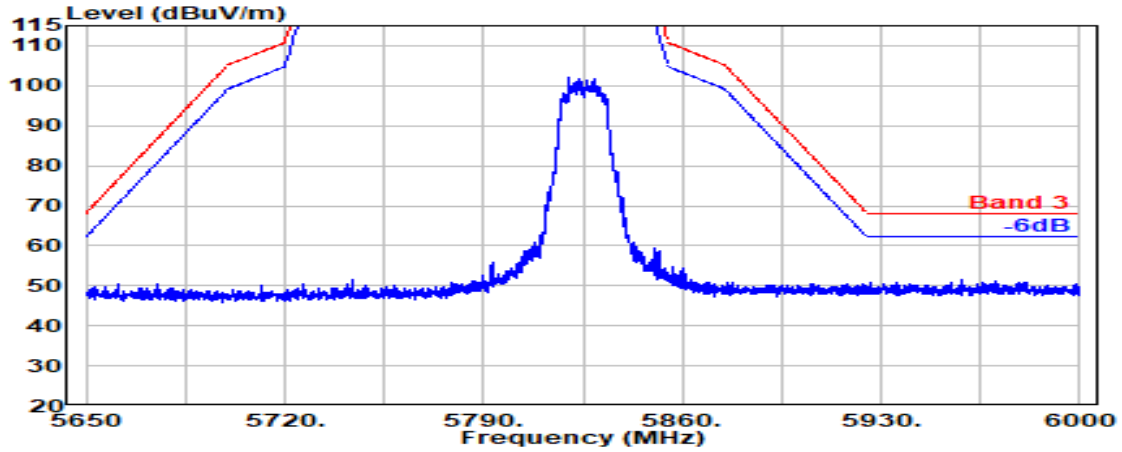

Antenna at Vertical Polarization

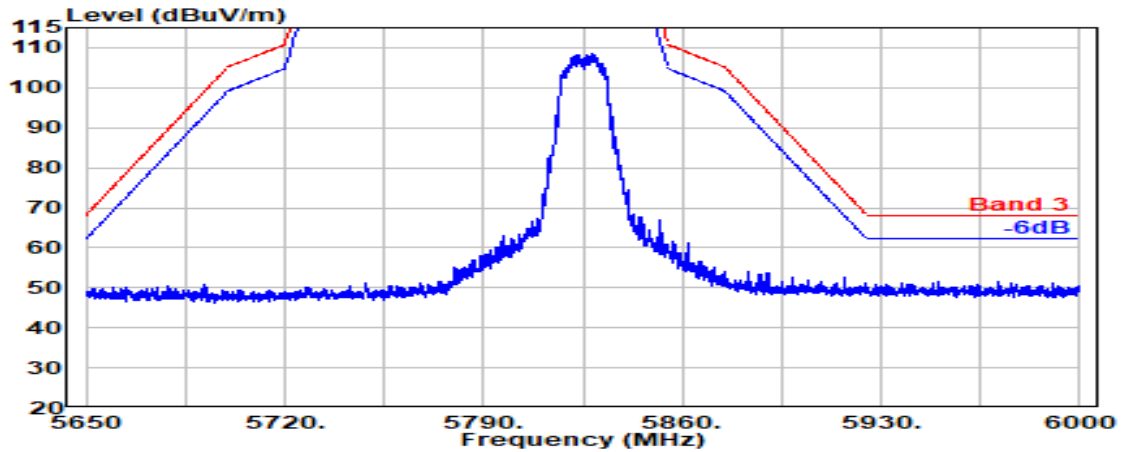


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

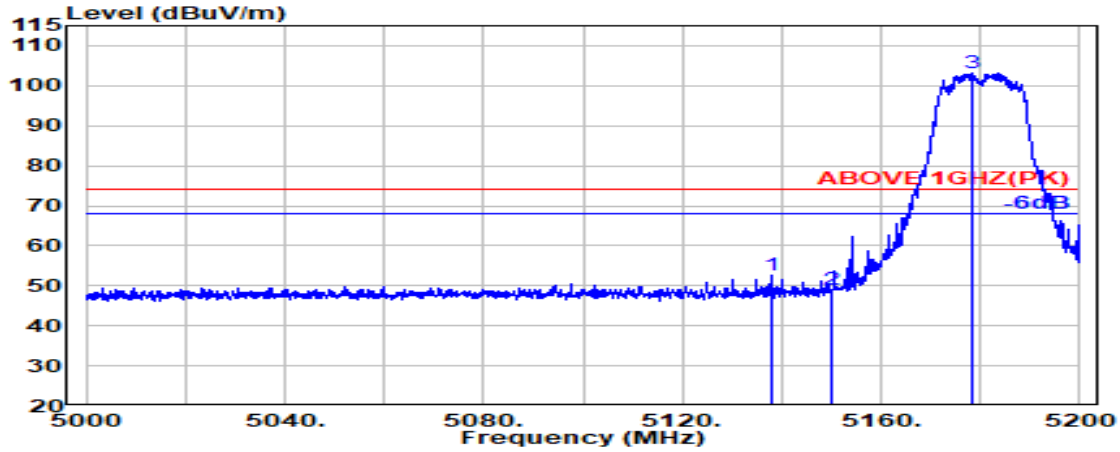

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.100	34.15	8.54	39.27	49.21	52.63	74.00	21.37	Peak
5150.000	34.20	8.54	39.27	45.40	48.88	74.00	25.12	Peak
@ 5178.400	34.26	8.56	39.27	99.67	103.22	---	---	Peak

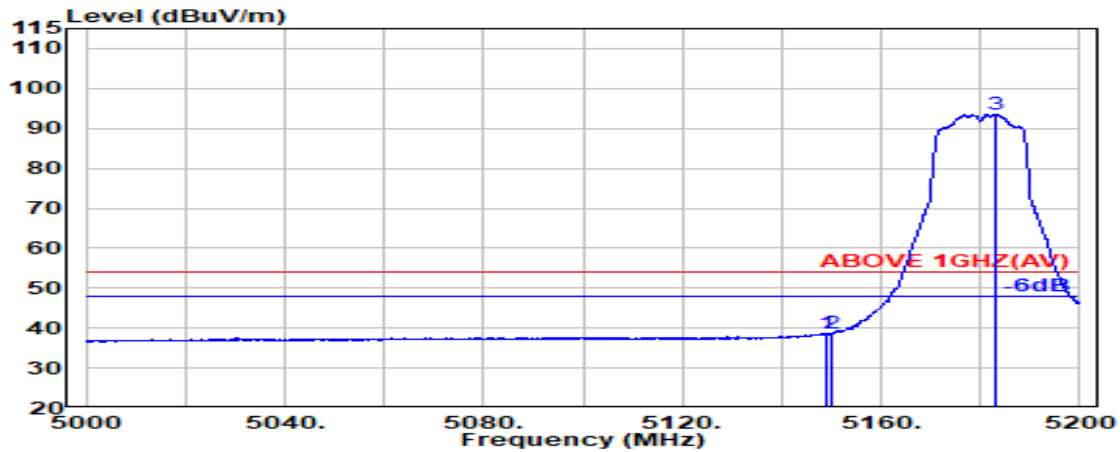


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	8.54	39.27	35.28	38.75	54.00	15.25	Average
5150.000	34.20	8.54	39.27	35.29	38.77	54.00	15.23	Average
@ 5183.300	34.27	8.56	39.27	90.05	93.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

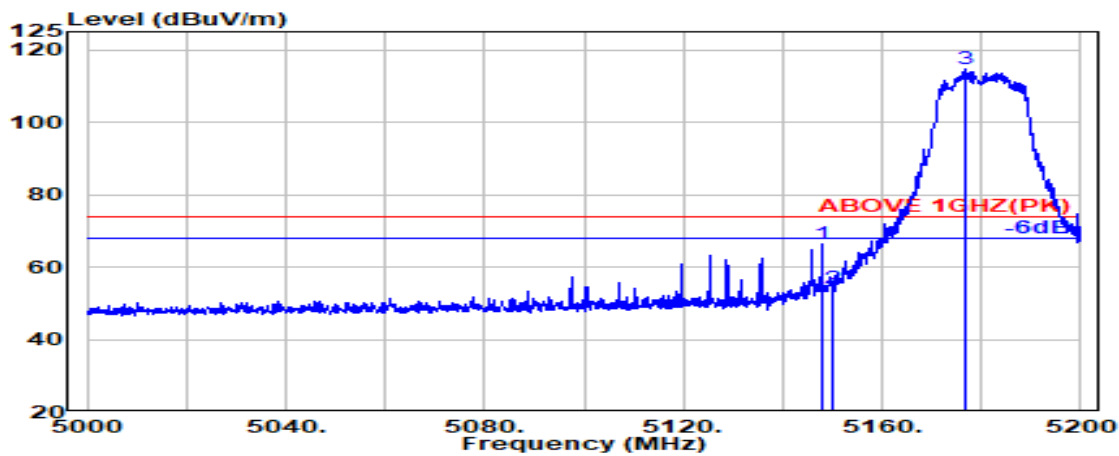

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.19	8.54	39.27	63.02	66.49	74.00	7.51	Peak
5150.000	34.20	8.54	39.27	50.78	54.26	74.00	19.74	Peak
@ 5176.800	34.25	8.56	39.27	110.98	114.53	---	---	Peak

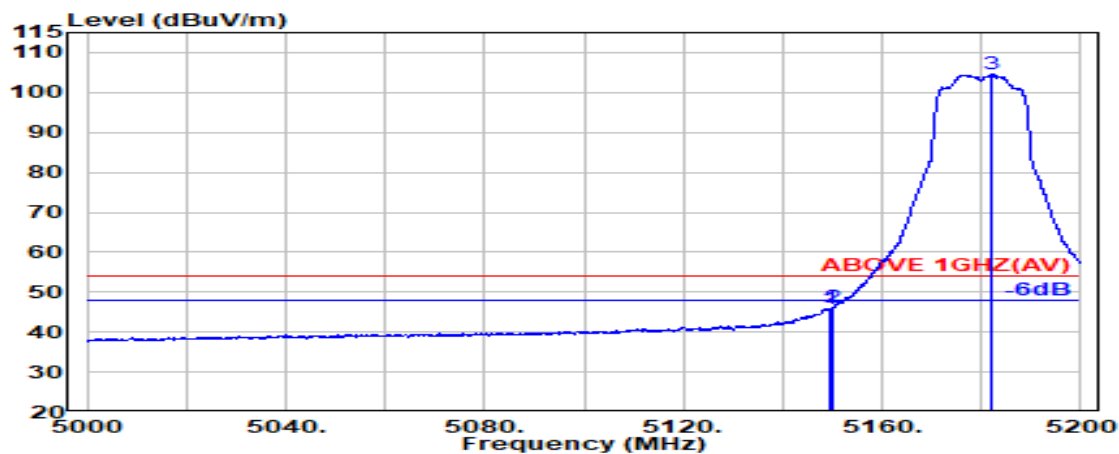


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.20	8.54	39.27	42.36	45.83	54.00	8.17	Average
5150.000	34.20	8.54	39.27	42.68	46.16	54.00	7.84	Average
@ 5182.200	34.26	8.56	39.27	101.06	104.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

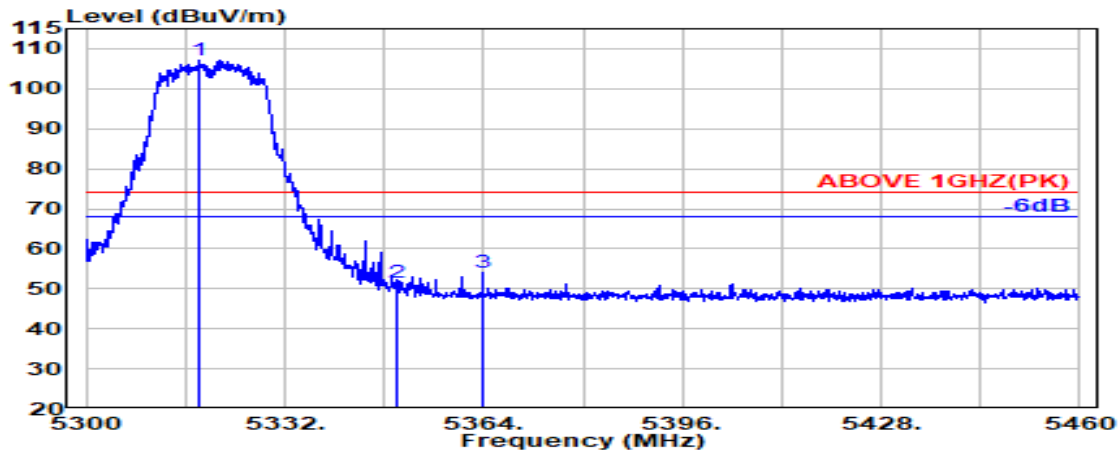

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.100	34.56	8.65	39.26	103.23	107.18	---	---	Peak
5350.000	34.50	8.67	39.26	47.67	51.58	74.00	22.42	Peak
5363.900	34.53	8.67	39.26	50.01	53.95	74.00	20.05	Peak

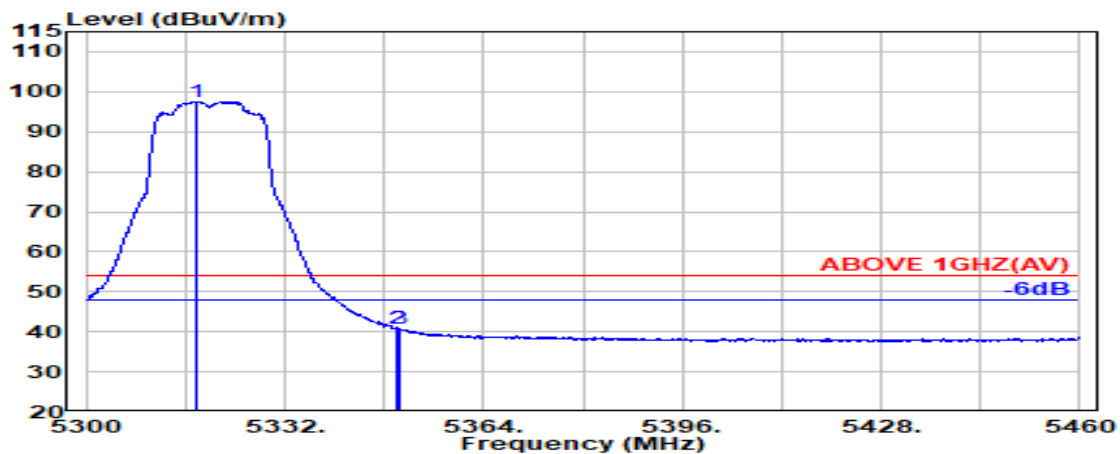


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	34.56	8.65	39.26	93.57	97.52	---	---	Average
5350.000	34.50	8.67	39.26	36.84	40.75	54.00	13.25	Average
5350.400	34.50	8.67	39.26	36.77	40.68	54.00	13.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

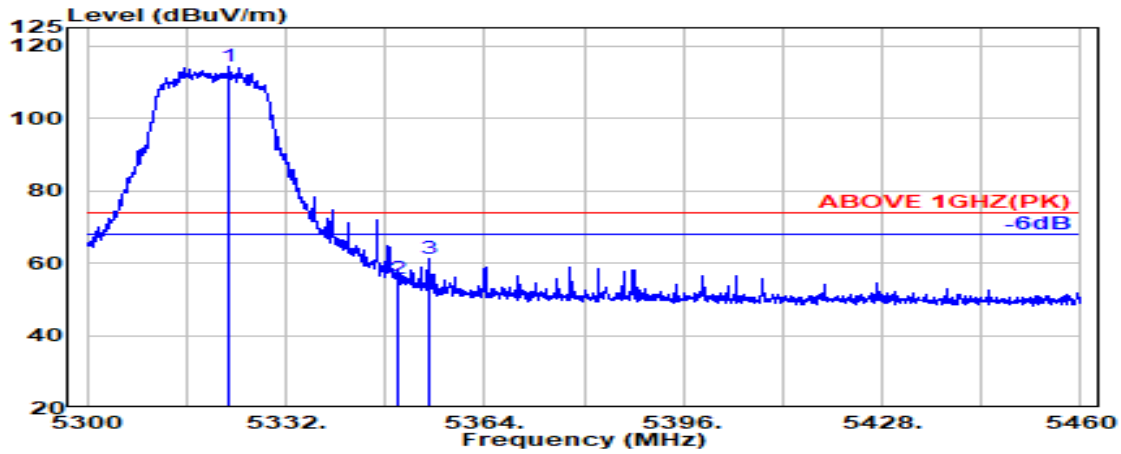

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	34.55	8.65	39.26	110.38	114.32	---	---	Peak
5350.000	34.50	8.67	39.26	51.70	55.60	74.00	18.40	Peak
5354.900	34.51	8.67	39.26	57.47	61.39	74.00	12.61	Peak

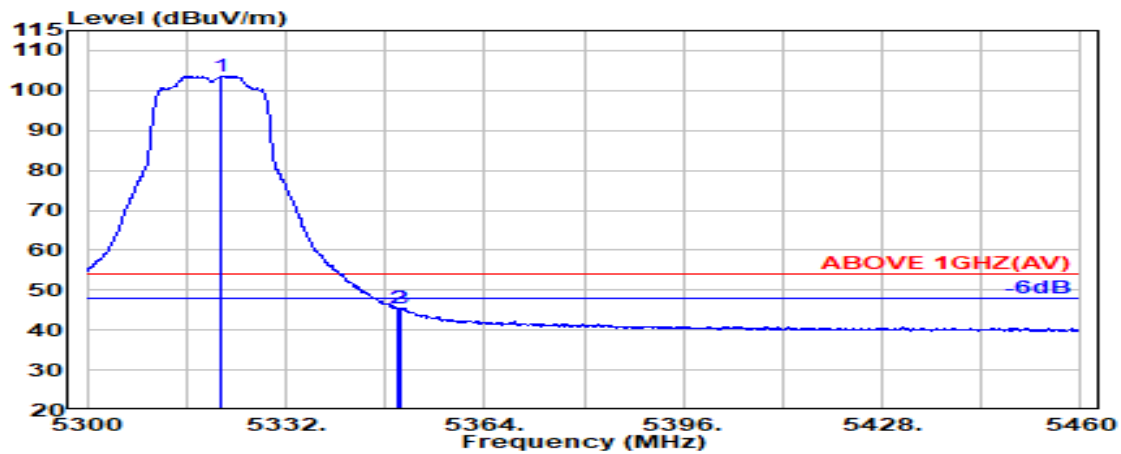


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	34.56	8.65	39.26	99.73	103.67	---	---	Average
5350.000	34.50	8.67	39.26	41.58	45.48	54.00	8.52	Average
5350.500	34.50	8.67	39.26	41.65	45.56	54.00	8.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

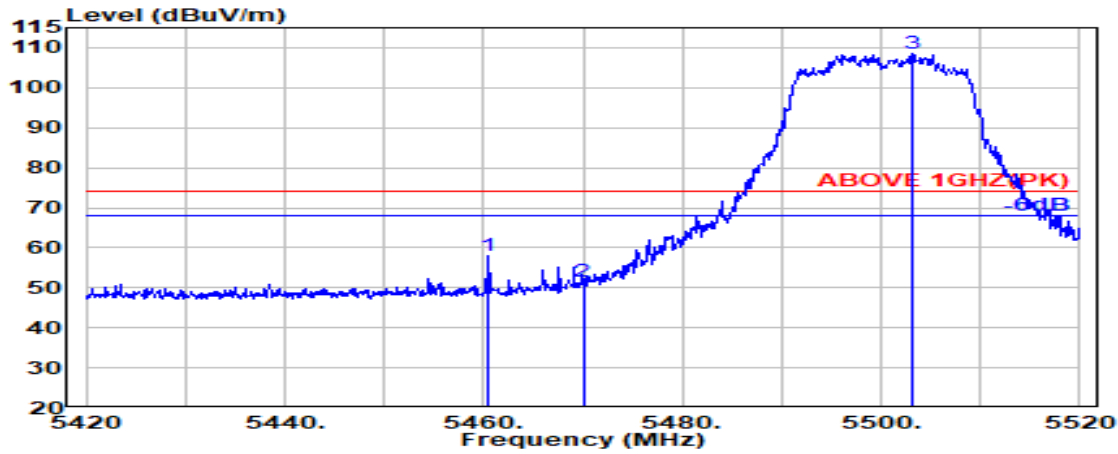

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.74	8.73	39.25	53.80	58.02	74.00	15.98	Peak
5470.000	34.78	8.74	39.25	47.45	51.71	74.00	22.29	Peak
@ 5503.100	34.89	8.75	39.25	104.26	108.66	---	---	Peak

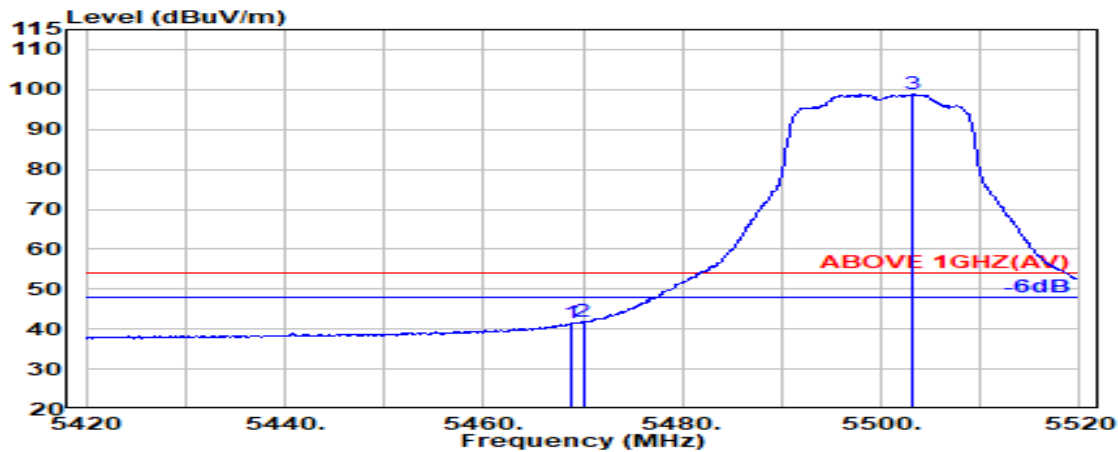


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	37.14	41.40	54.00	12.60	Average
5470.000	34.78	8.74	39.25	37.48	41.74	54.00	12.26	Average
@ 5503.100	34.89	8.75	39.25	94.39	98.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

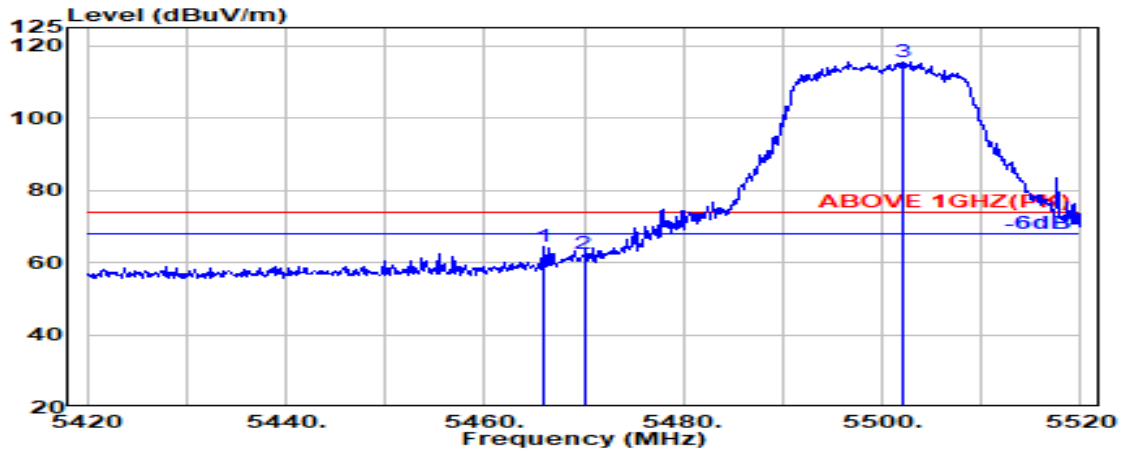

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.77	8.73	39.25	62.68	66.94	74.00	7.06	Peak
5470.000	34.78	8.74	39.25	56.73	61.00	74.00	13.00	Peak
@ 5496.600	34.89	8.75	39.25	110.68	115.07	---	---	Peak

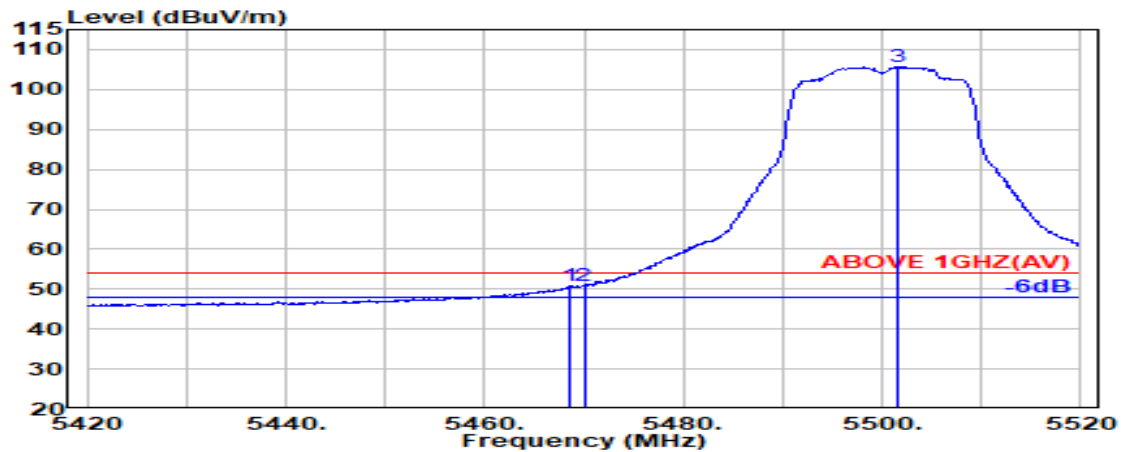


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	41.91	46.17	54.00	7.83	Average
5470.000	34.78	8.74	39.25	42.49	46.75	54.00	7.25	Average
@ 5497.100	34.89	8.75	39.25	100.28	104.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

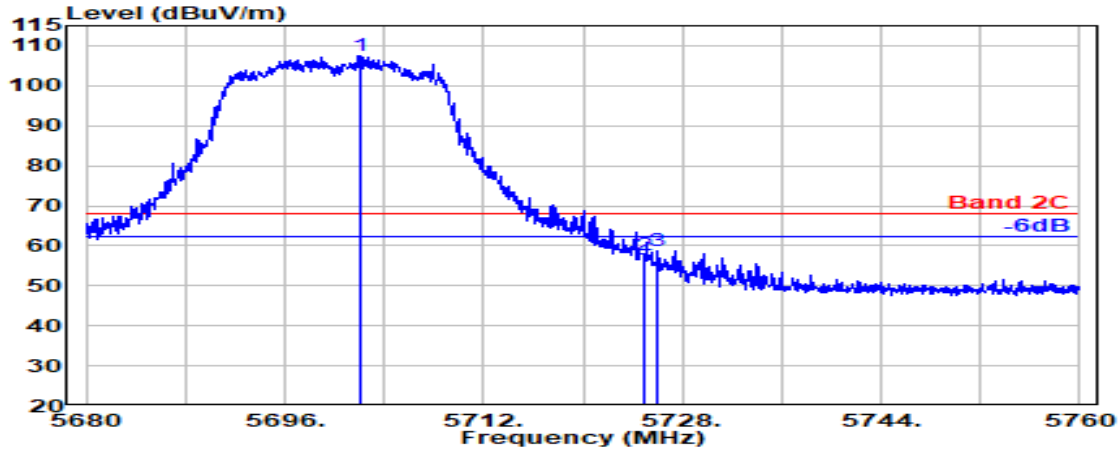

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.050	34.40	8.87	39.29	103.60	107.58	---	---	Peak
5725.000	34.45	8.88	39.29	53.66	57.70	68.20	10.50	Peak
5726.000	34.45	8.88	39.29	54.72	58.76	68.20	9.44	Peak

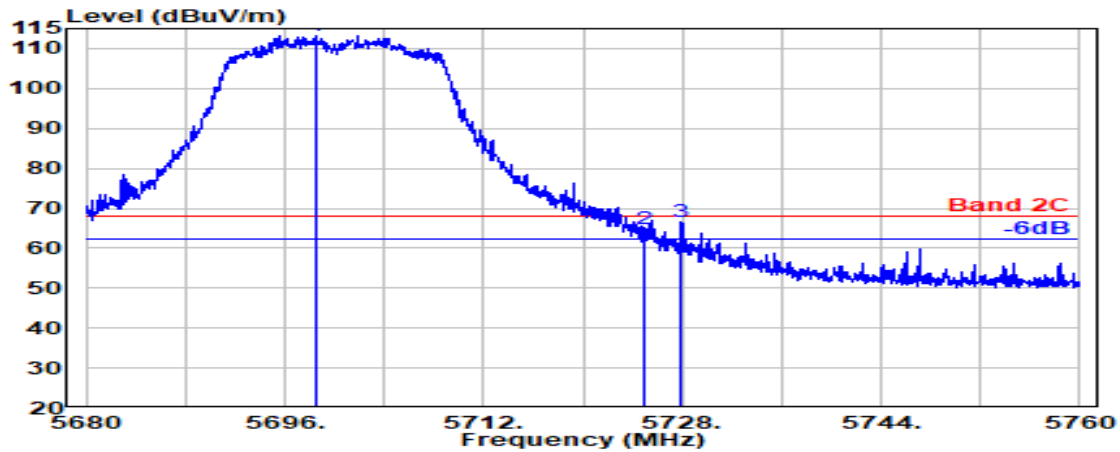


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.450	34.41	8.87	39.29	109.38	113.36	---	---	Peak
5725.000	34.45	8.88	39.29	60.60	64.64	68.20	3.56	Peak
5727.950	34.46	8.88	39.29	62.63	66.67	68.20	1.53	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

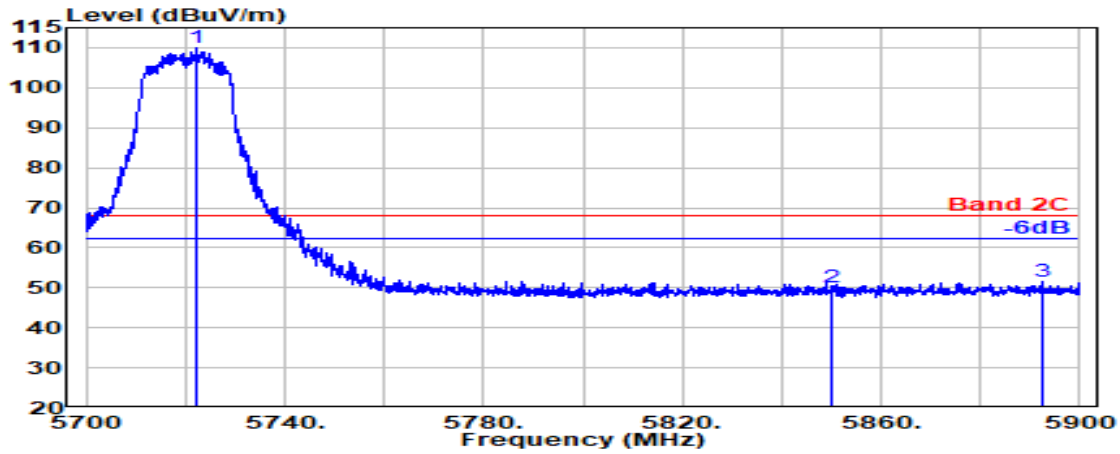

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	34.44	8.88	39.29	105.81	109.84	---	---	Peak
5850.000	34.70	8.95	39.31	45.91	50.25	68.20	17.95	Peak
5892.500	34.79	8.97	39.32	47.24	51.68	68.20	16.52	Peak

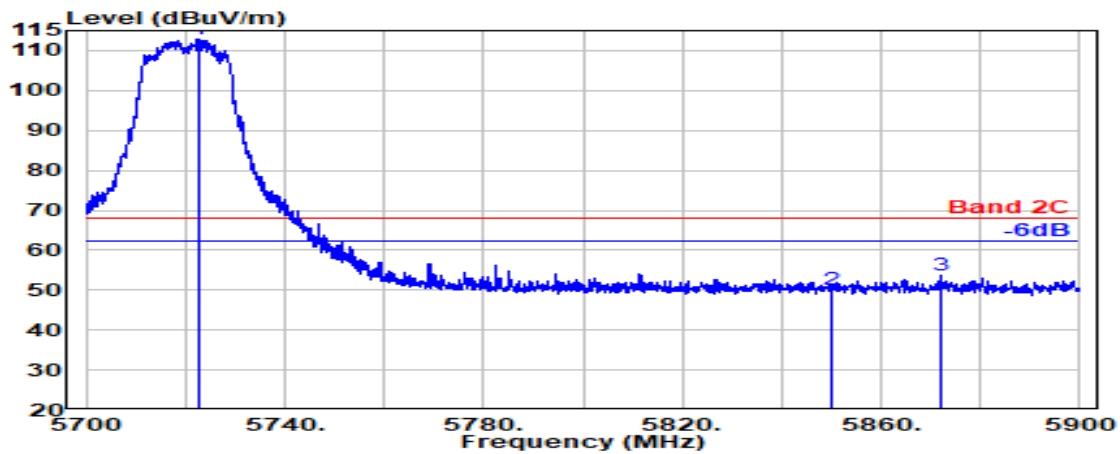


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.900	34.45	8.88	39.29	108.94	112.97	---	---	Peak
5850.000	34.70	8.95	39.31	45.69	50.03	68.20	18.17	Peak
5872.200	34.74	8.96	39.32	49.19	53.58	68.20	14.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

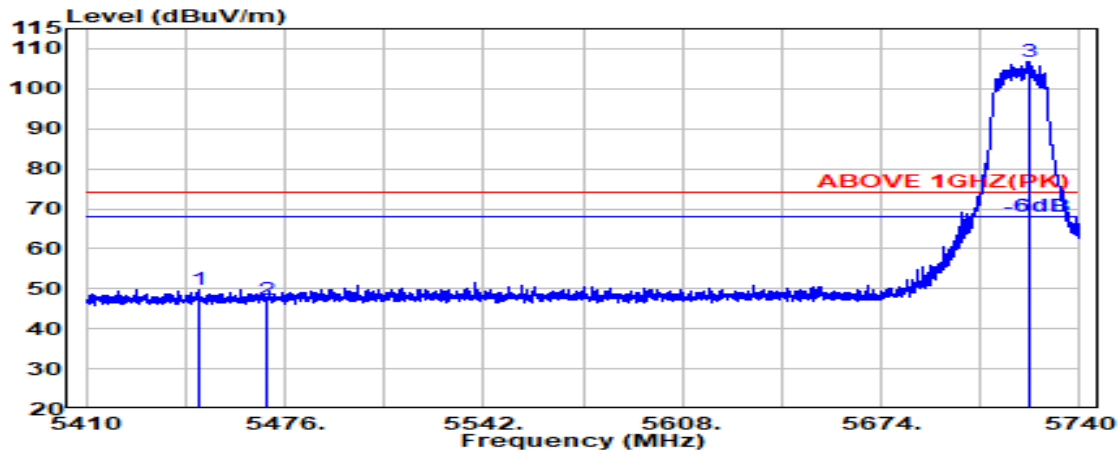

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.70	8.72	39.25	45.70	49.86	74.00	24.14	Peak
5470.000	34.78	8.74	39.25	42.97	47.24	74.00	26.76	Peak
@ 5722.900	34.45	8.88	39.29	102.68	106.72	---	---	Peak

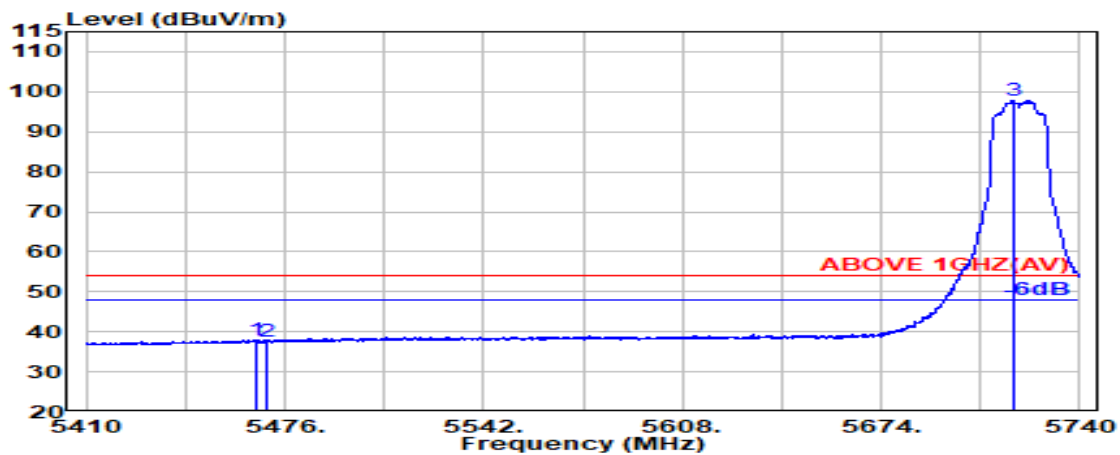


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.77	8.73	39.25	33.81	38.06	54.00	15.94	Average
5470.000	34.78	8.74	39.25	33.47	37.74	54.00	16.26	Average
@ 5717.900	34.44	8.88	39.29	93.70	97.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

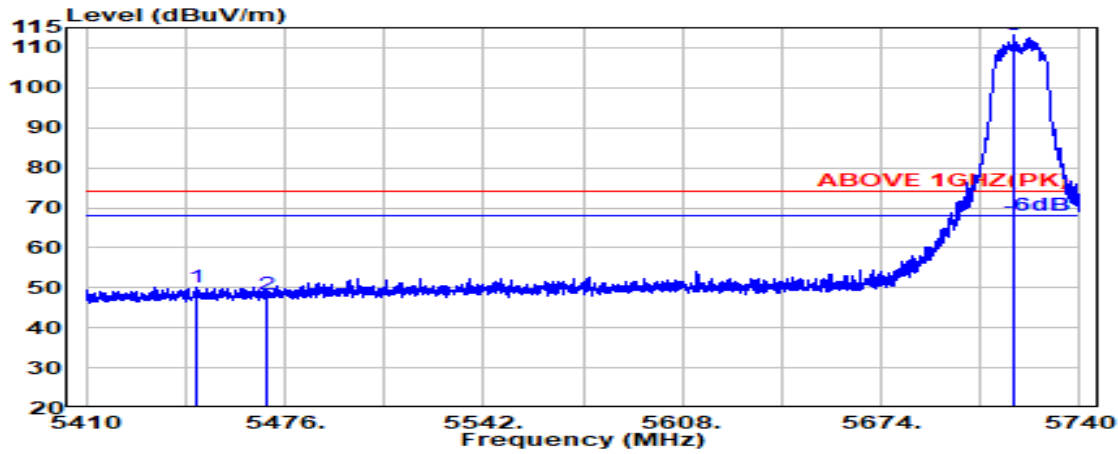

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.800	34.69	8.72	39.25	46.08	50.24	74.00	23.76	Peak
5470.000	34.78	8.74	39.25	43.92	48.19	74.00	25.81	Peak
@ 5717.900	34.44	8.88	39.29	109.12	113.14	---	---	Peak

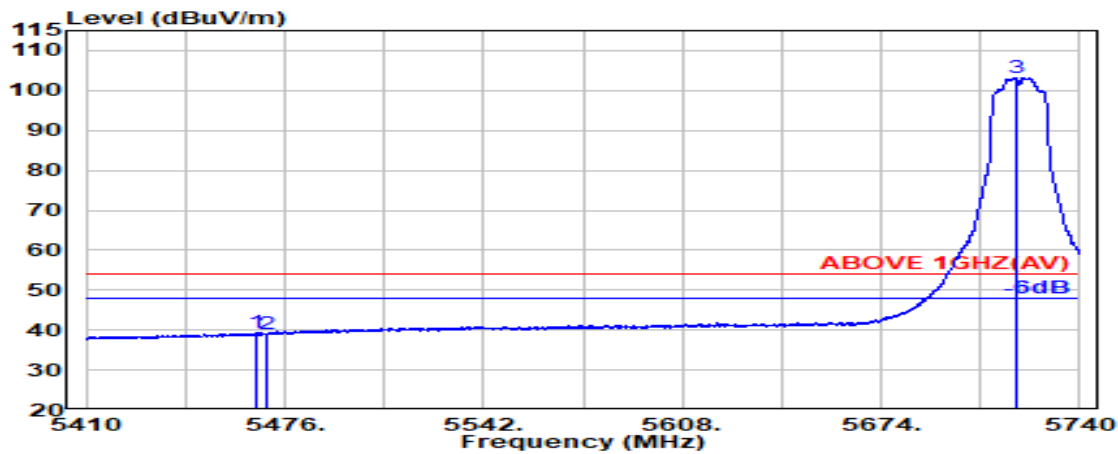


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.77	8.73	39.25	35.06	39.31	54.00	14.69	Average
5470.000	34.78	8.74	39.25	34.88	39.14	54.00	14.86	Average
@ 5718.600	34.44	8.88	39.29	99.21	103.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

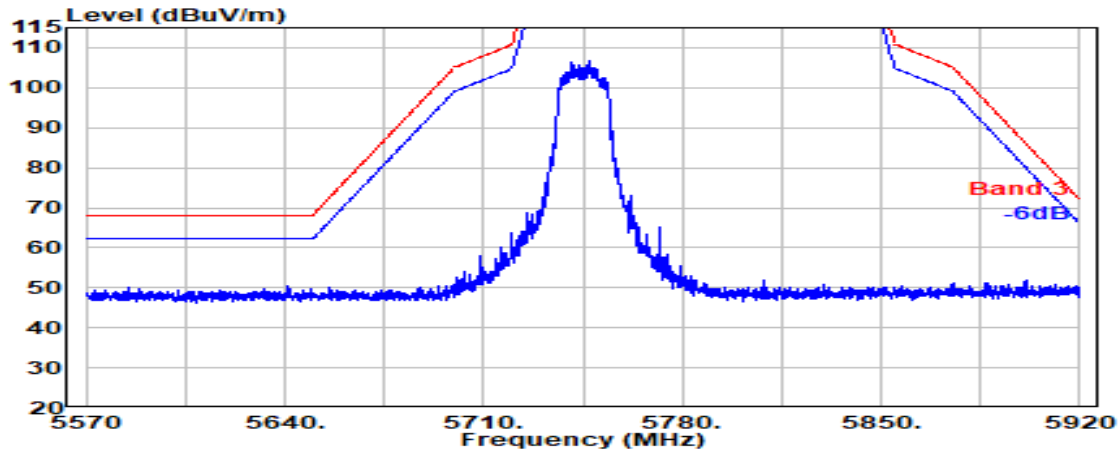


Antenna at Vertical Polarization

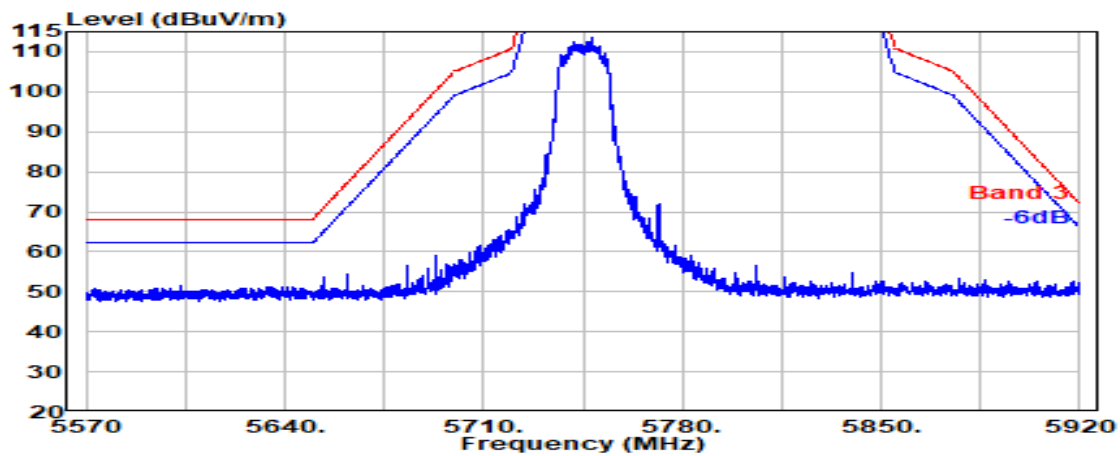




Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

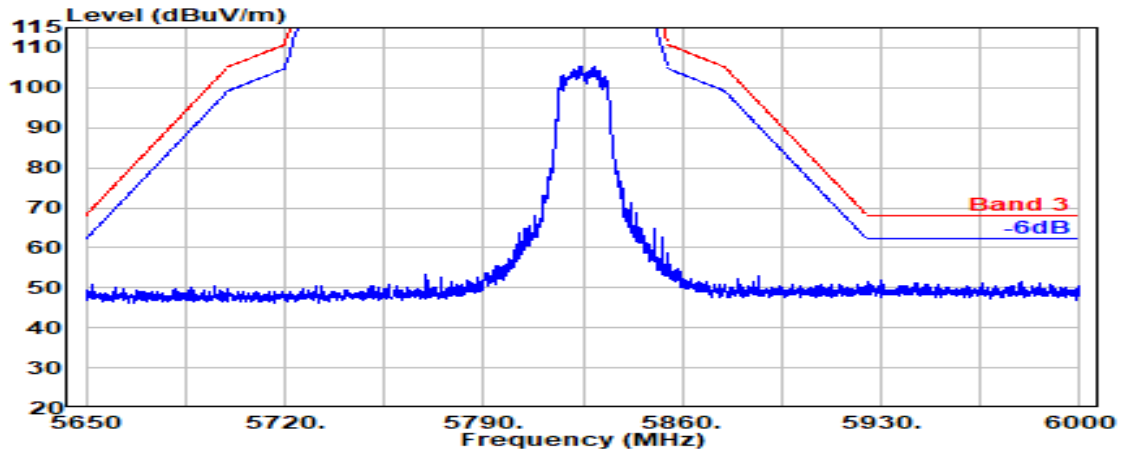

Antenna at Vertical Polarization

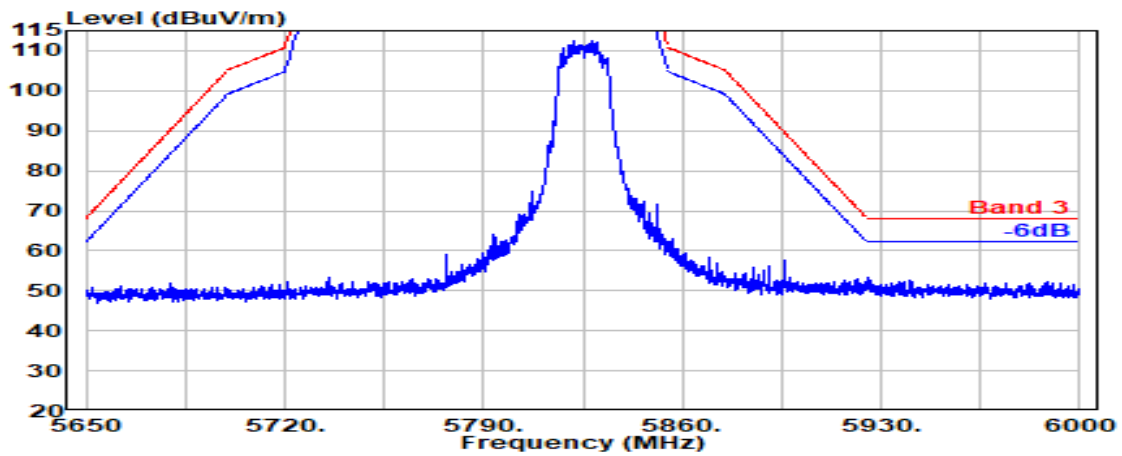


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

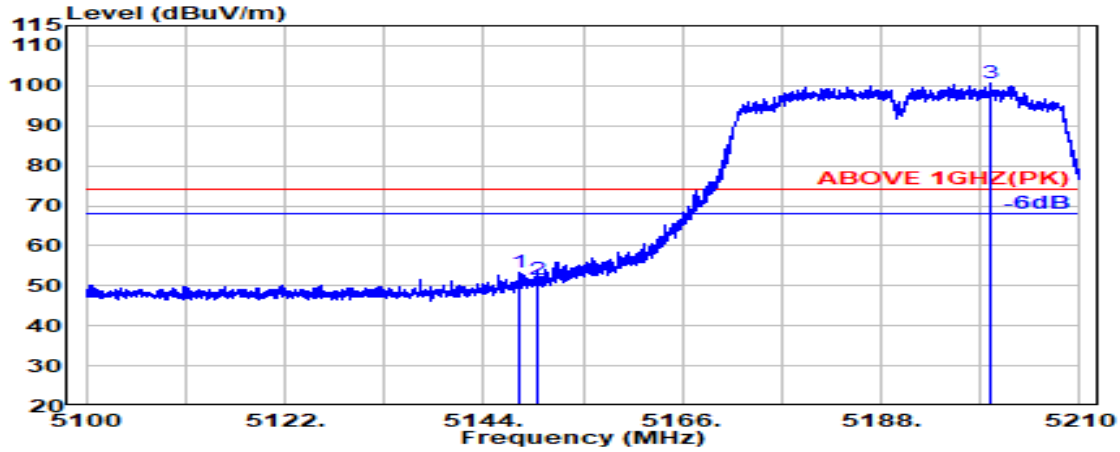

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.023	34.19	8.54	39.27	49.74	53.20	74.00	20.80	Peak
5150.000	34.20	8.54	39.27	48.22	51.69	74.00	22.31	Peak
@ 5200.100	34.30	8.57	39.27	97.08	100.69	---	---	Peak

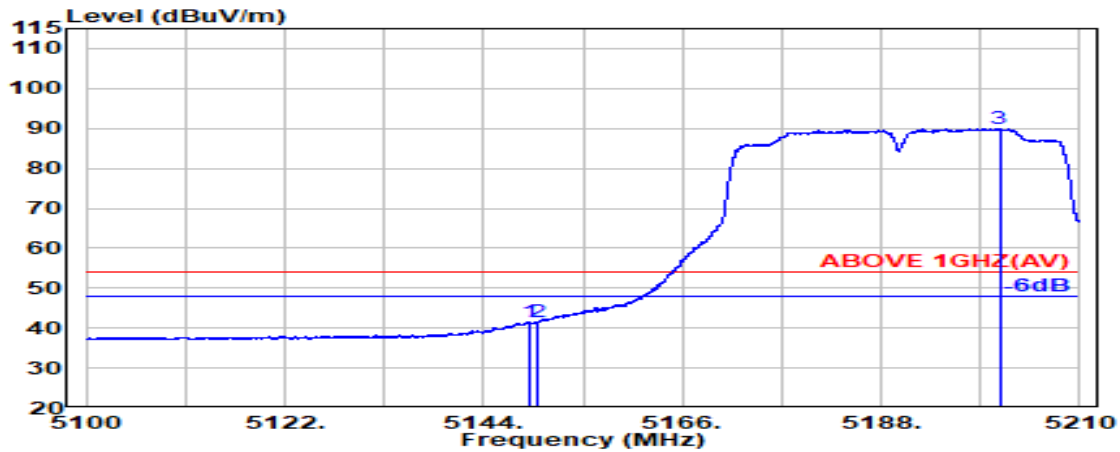


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.966	34.20	8.54	39.27	38.04	41.51	54.00	12.49	Average
5150.000	34.20	8.54	39.27	38.08	41.55	54.00	12.45	Average
@ 5201.106	34.30	8.58	39.27	86.33	89.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

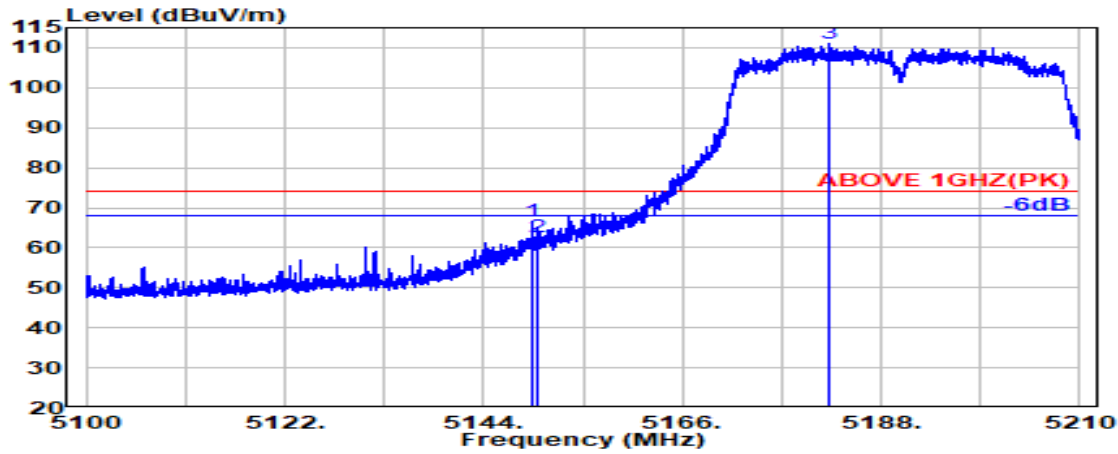

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.375	34.20	8.54	39.27	63.14	66.61	74.00	7.39	Peak
5150.000	34.20	8.54	39.27	59.15	62.62	74.00	11.38	Peak
@ 5182.249	34.26	8.56	39.27	107.53	111.09	---	---	Peak

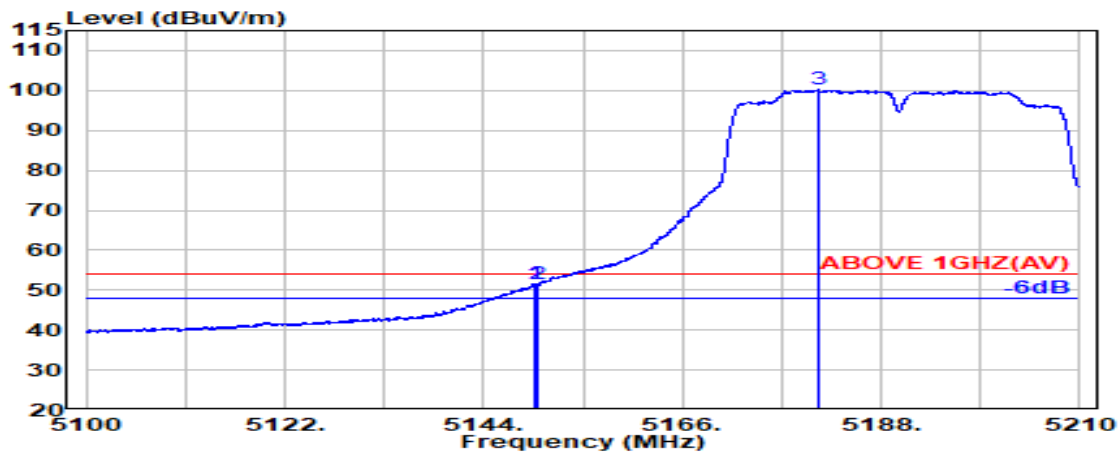


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.563	34.20	8.54	39.27	47.98	51.45	54.00	2.55	Average
5150.000	34.20	8.54	39.27	47.91	51.39	54.00	2.61	Average
@ 5181.023	34.26	8.56	39.27	96.57	100.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

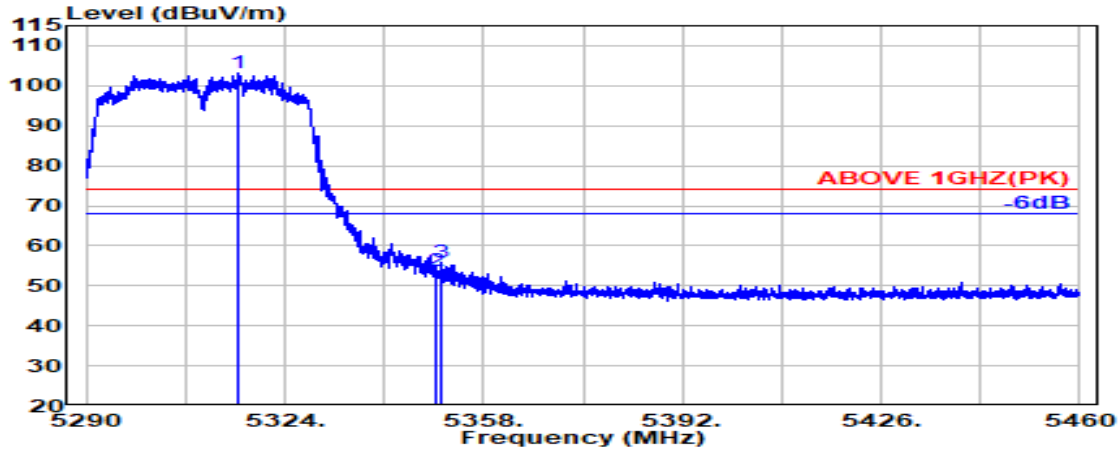

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.131	34.57	8.65	39.26	99.17	103.12	---	---	Peak
5350.000	34.50	8.67	39.26	49.80	53.71	74.00	20.29	Peak
5350.763	34.50	8.67	39.26	51.90	55.81	74.00	18.19	Peak

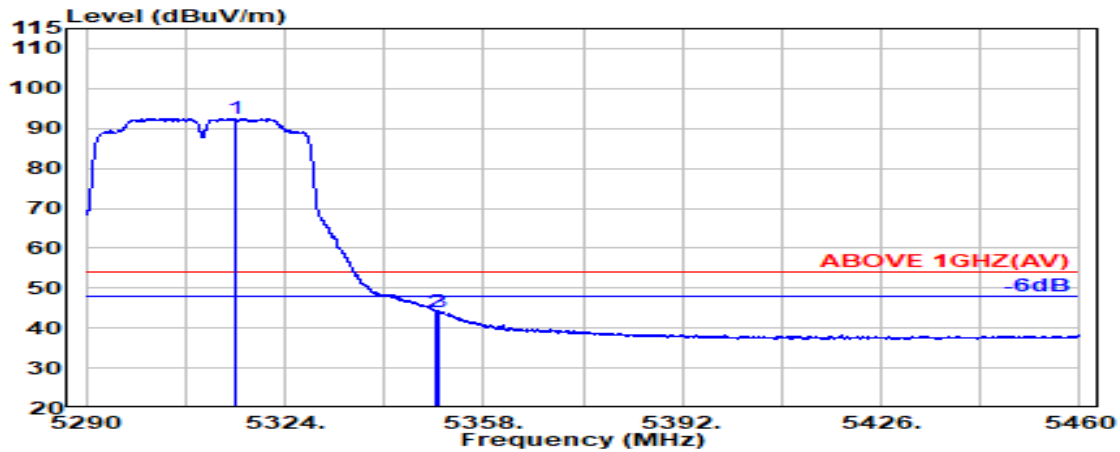


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.403	34.57	8.64	39.26	88.57	92.52	---	---	Average
5350.000	34.50	8.67	39.26	40.05	43.96	54.00	10.04	Average
5350.326	34.50	8.67	39.26	40.29	44.20	54.00	9.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

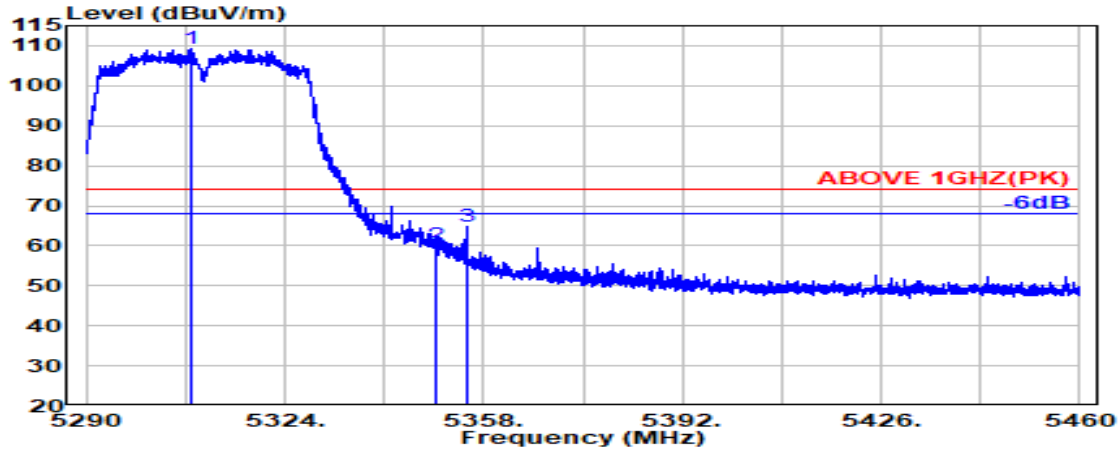

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.068	34.58	8.64	39.26	105.26	109.22	---	---	Peak
5350.000	34.50	8.67	39.26	56.18	60.08	74.00	13.92	Peak
5354.989	34.51	8.67	39.26	61.04	64.96	74.00	9.04	Peak

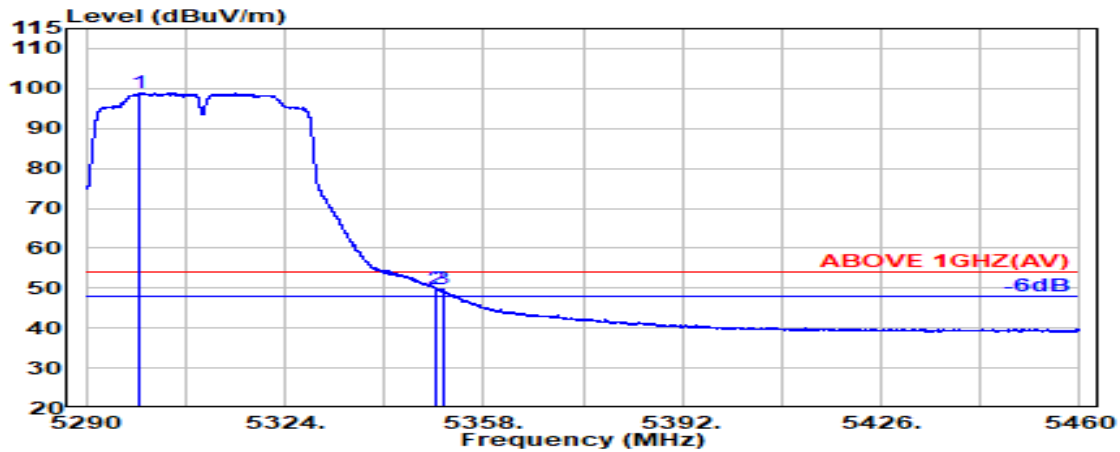


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.180	34.60	8.63	39.26	94.90	98.87	---	---	Average
5350.000	34.50	8.67	39.26	45.86	49.76	54.00	4.24	Average
5350.957	34.50	8.67	39.26	45.86	49.76	54.00	4.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

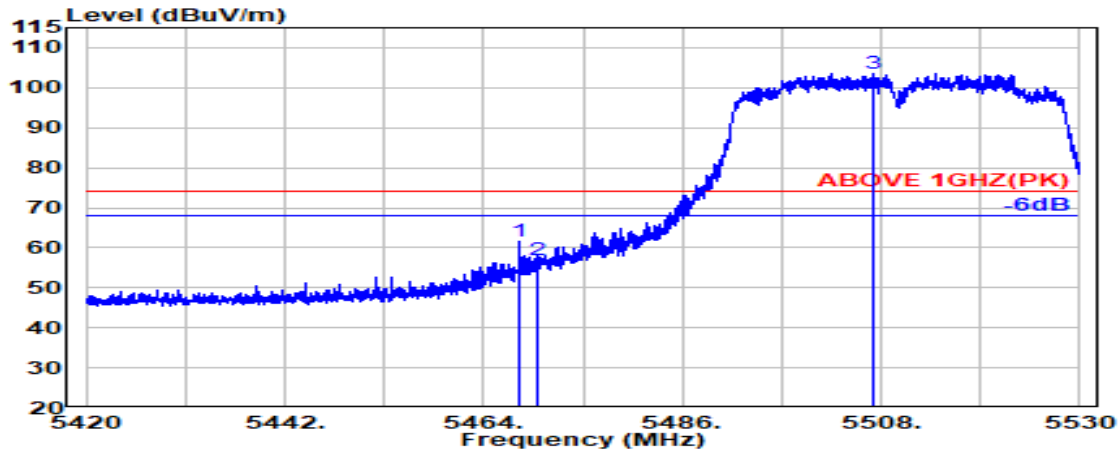

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.991	34.77	8.73	39.25	57.20	61.45	74.00	12.55	Peak
5470.000	34.78	8.74	39.25	52.82	57.09	74.00	16.91	Peak
@ 5507.246	34.89	8.76	39.25	99.11	103.50	---	---	Peak

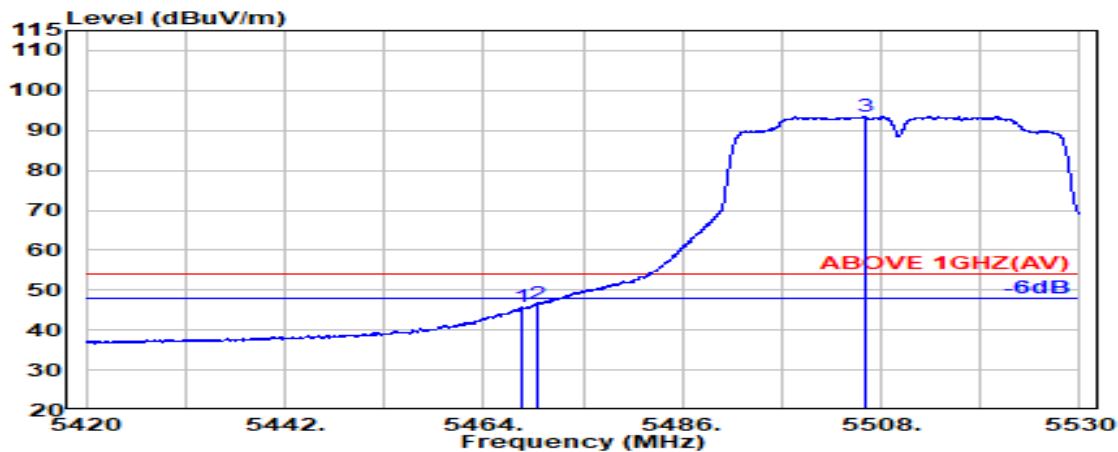


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.337	34.77	8.73	39.25	41.43	45.69	54.00	8.31	Average
5470.000	34.78	8.74	39.25	42.21	46.47	54.00	7.53	Average
@ 5506.240	34.89	8.76	39.25	89.05	93.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

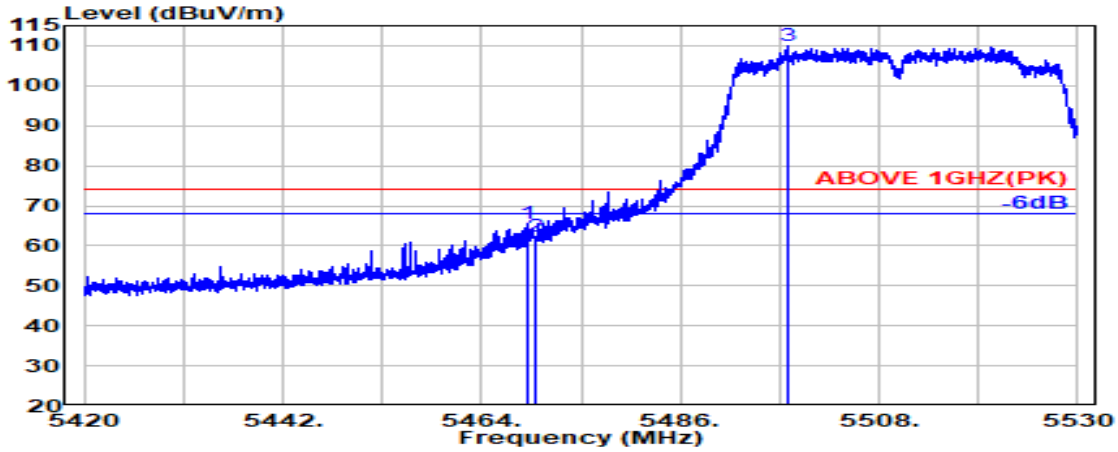

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.966	34.78	8.74	39.25	61.40	65.66	74.00	8.34	Peak
5470.000	34.78	8.74	39.25	58.09	62.35	74.00	11.65	Peak
@ 5497.974	34.89	8.75	39.25	105.56	109.95	---	---	Peak

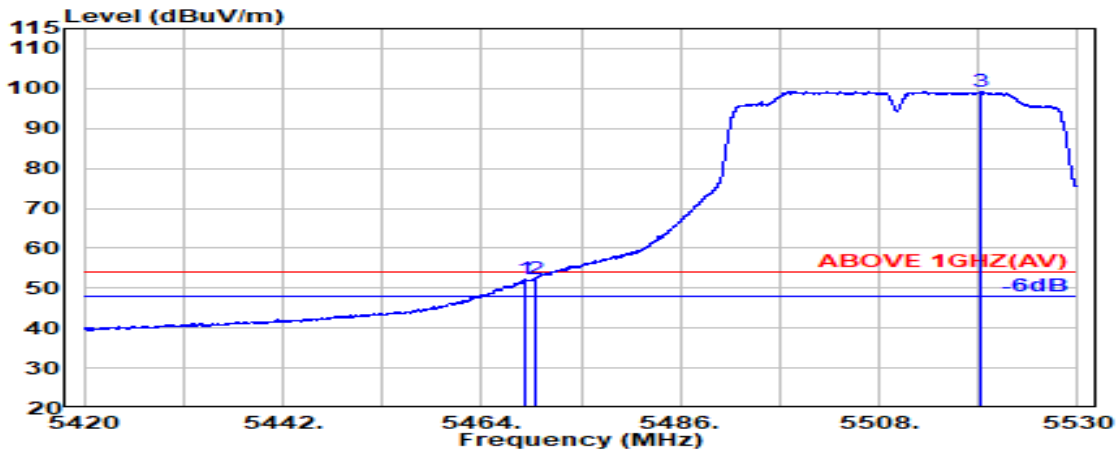


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.78	8.74	39.25	47.89	52.15	54.00	1.85	Average
5470.000	34.78	8.74	39.25	48.04	52.30	54.00	1.70	Average
@ 5519.346	34.86	8.76	39.25	94.85	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

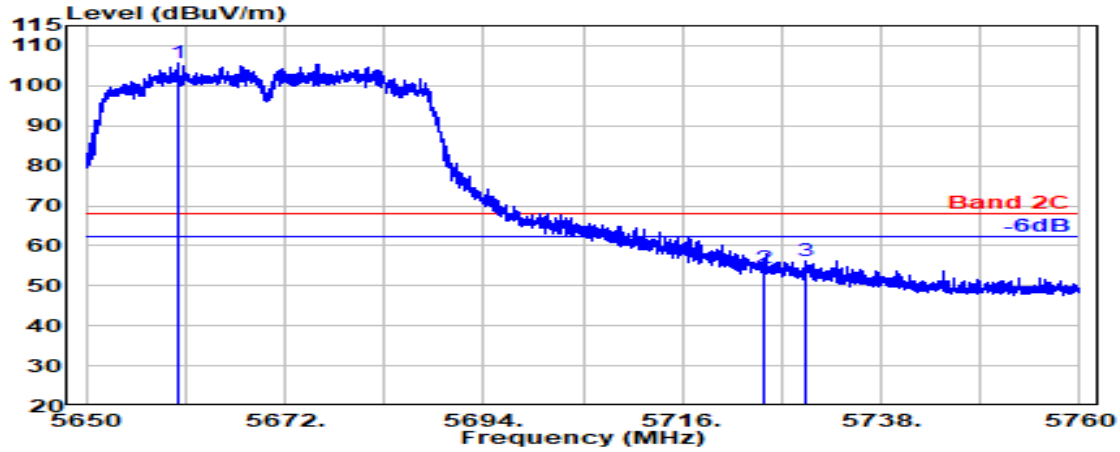

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.214	34.56	8.84	39.28	101.51	105.63	---	---	Peak
5725.000	34.45	8.88	39.29	50.53	54.57	68.20	13.63	Peak
5729.703	34.46	8.88	39.29	52.19	56.24	68.20	11.96	Peak

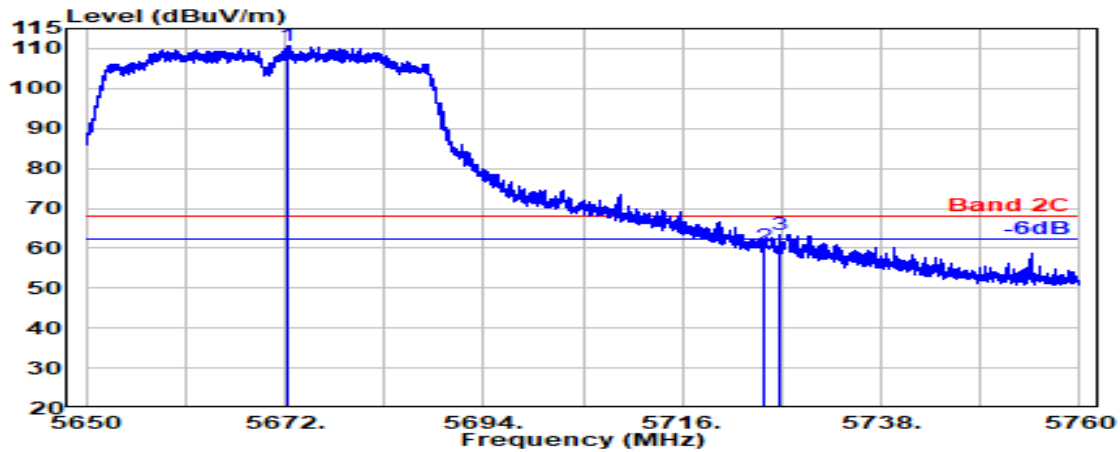


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.409	34.51	8.85	39.28	106.53	110.61	---	---	Peak
5725.000	34.45	8.88	39.29	56.39	60.43	68.20	7.77	Peak
5726.686	34.45	8.88	39.29	59.47	63.51	68.20	4.69	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

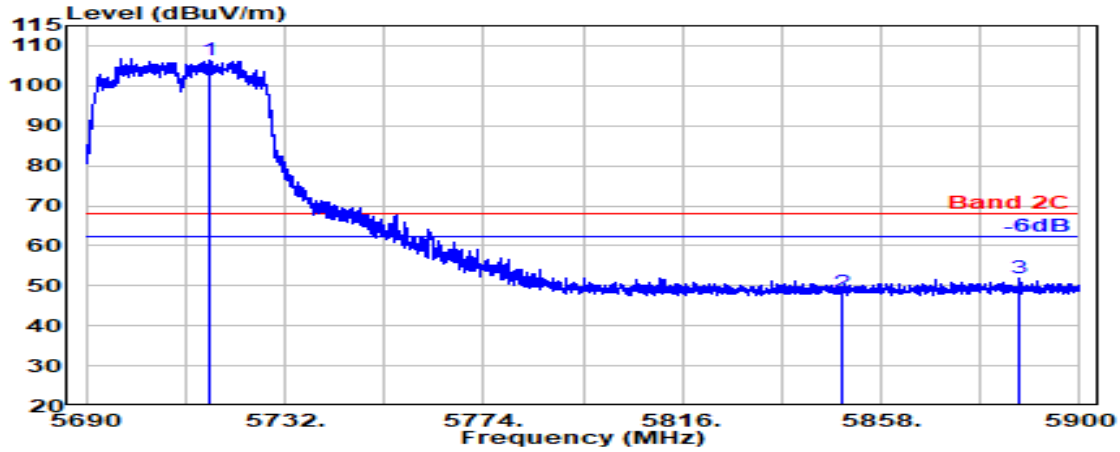

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.220	34.43	8.88	39.29	102.51	106.53	---	---	Peak
5850.000	34.70	8.95	39.31	44.03	48.36	68.20	19.84	Peak
5887.100	34.77	8.97	39.32	47.46	51.88	68.20	16.32	Peak

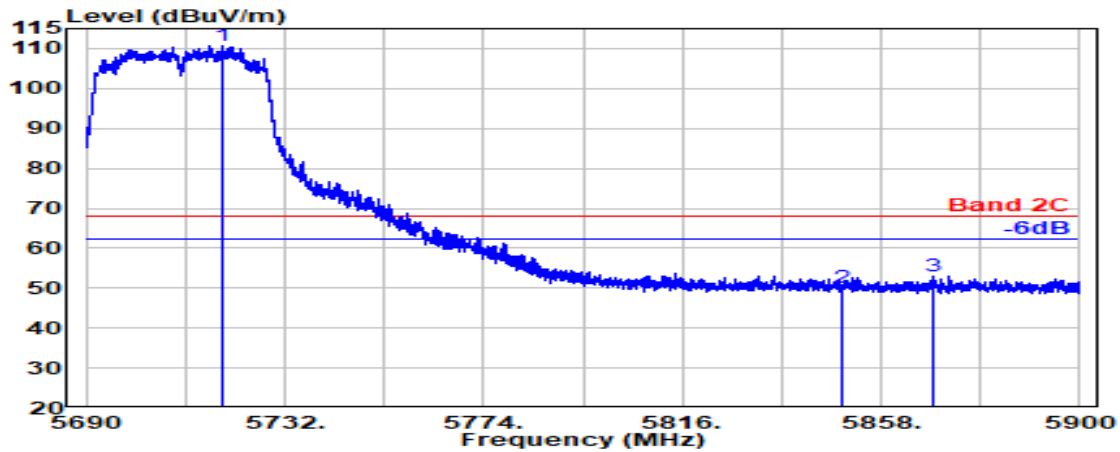


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.980	34.44	8.88	39.29	106.79	110.81	---	---	Peak
5850.000	34.70	8.95	39.31	45.62	49.95	68.20	18.25	Peak
5869.160	34.74	8.96	39.32	48.64	53.02	68.20	15.18	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

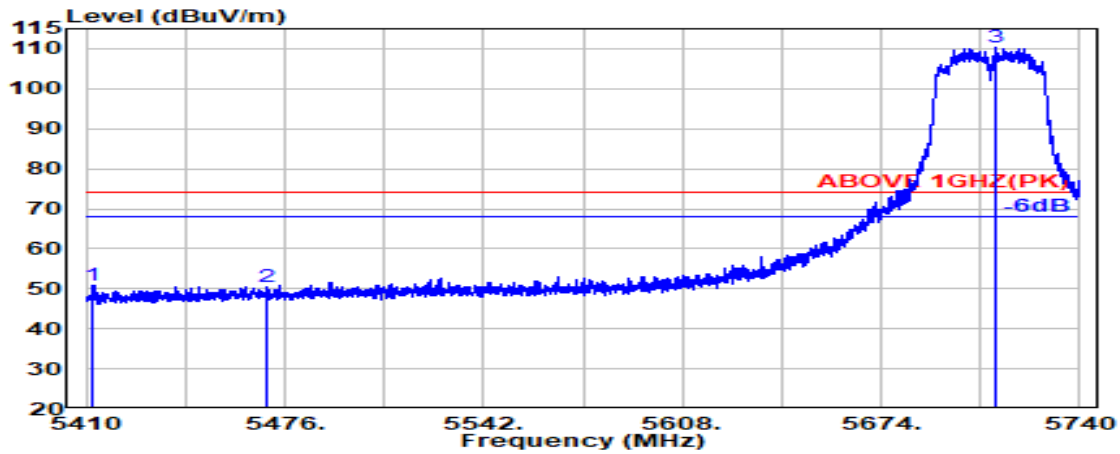

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.037	34.69	8.72	39.25	45.71	49.86	74.00	24.14	Peak
5470.000	34.78	8.74	39.25	44.52	48.79	74.00	25.21	Peak
@ 5718.125	34.44	8.88	39.29	100.38	104.40	---	---	Peak

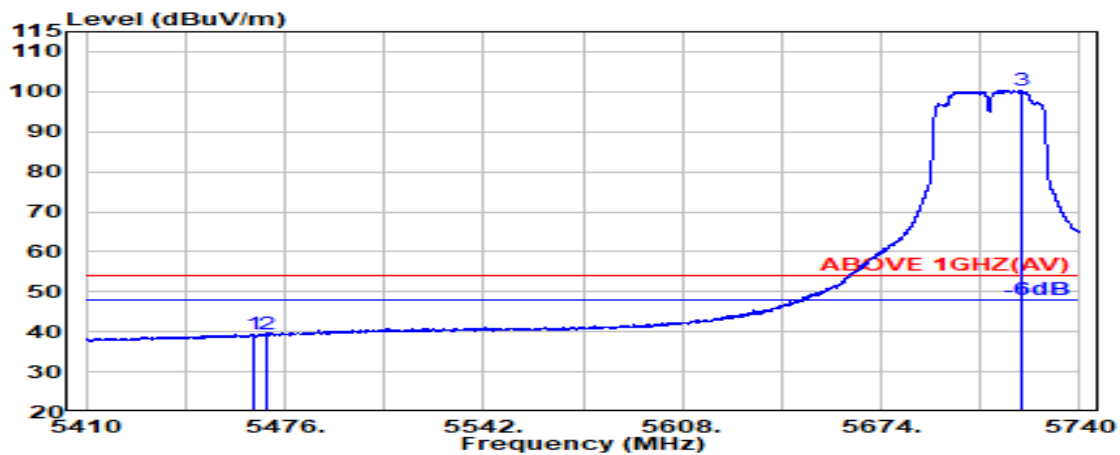


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.457	34.77	8.73	39.25	33.61	37.87	54.00	16.13	Average
5470.000	34.78	8.74	39.25	33.34	37.60	54.00	16.40	Average
@ 5721.708	34.44	8.88	39.29	90.75	94.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

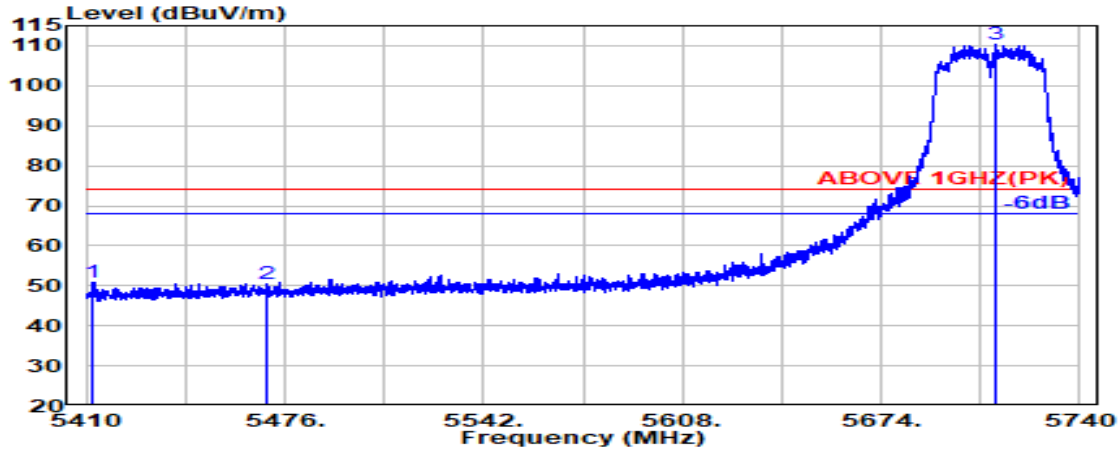

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.452	34.62	8.70	39.26	46.68	50.75	74.00	23.25	Peak
5470.000	34.78	8.74	39.25	46.18	50.45	74.00	23.55	Peak
@ 5711.809	34.42	8.87	39.29	106.22	110.23	---	---	Peak

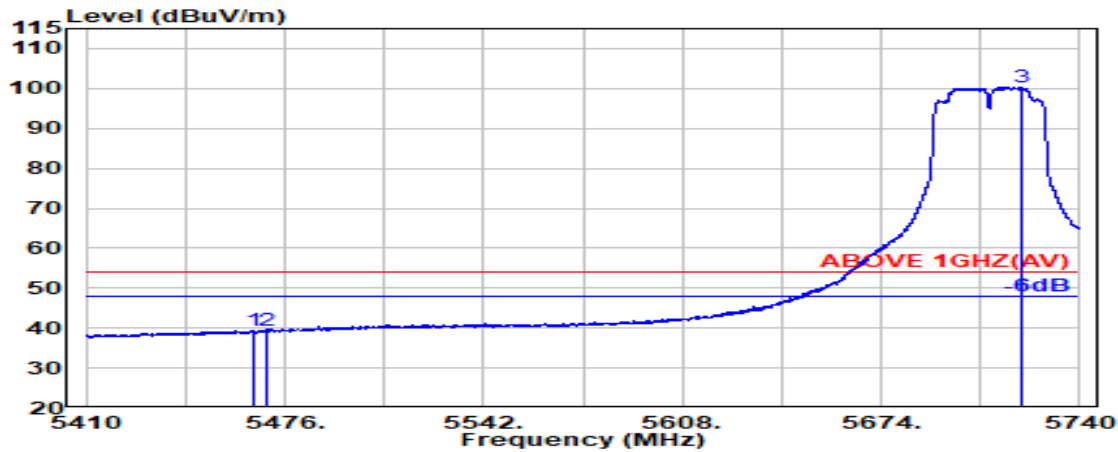


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.440	34.76	8.73	39.25	35.17	39.42	54.00	14.58	Average
5470.000	34.78	8.74	39.25	34.92	39.19	54.00	14.81	Average
@ 5720.671	34.44	8.88	39.29	96.34	100.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

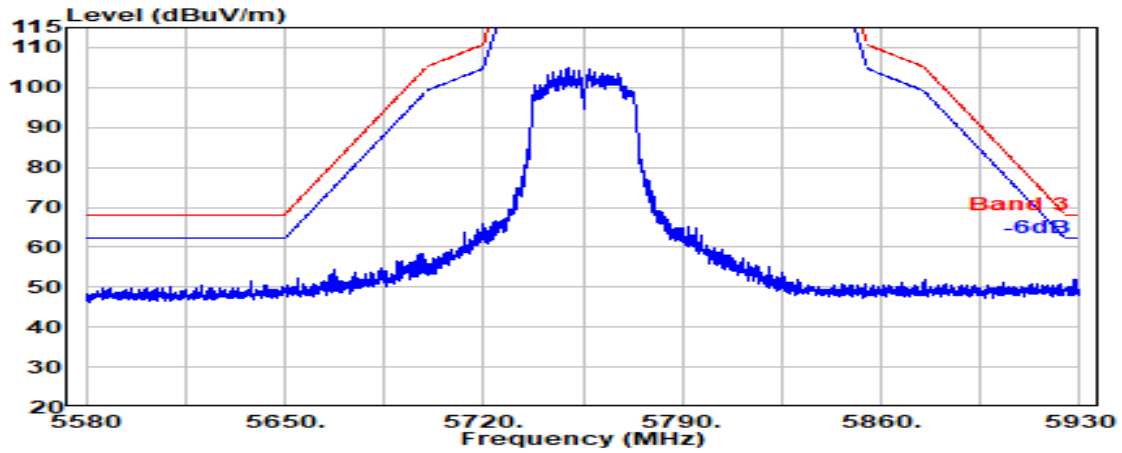


Antenna at Vertical Polarization

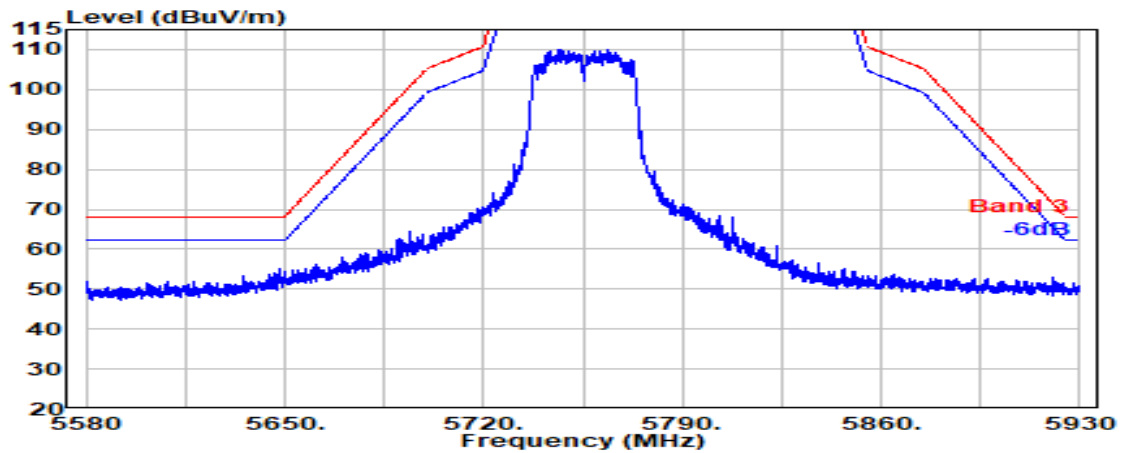


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

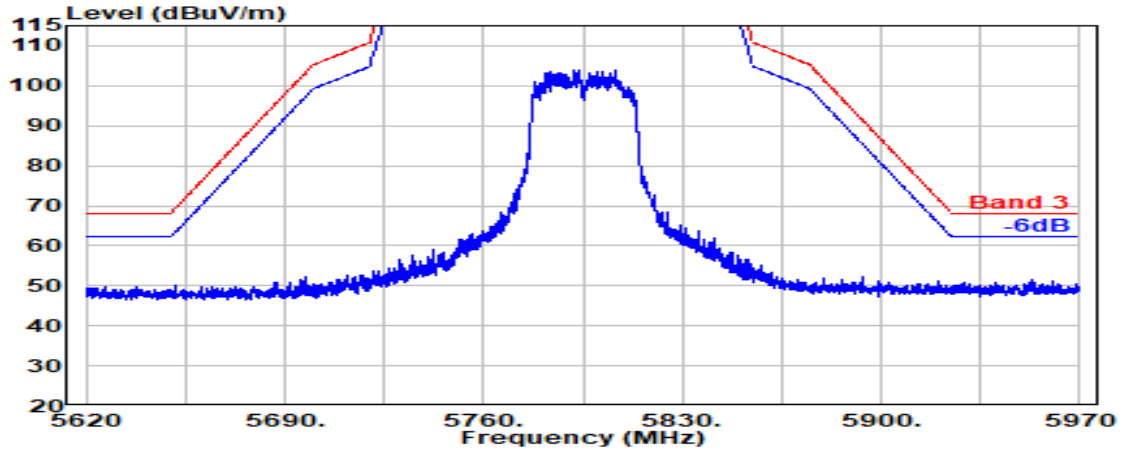

Antenna at Vertical Polarization

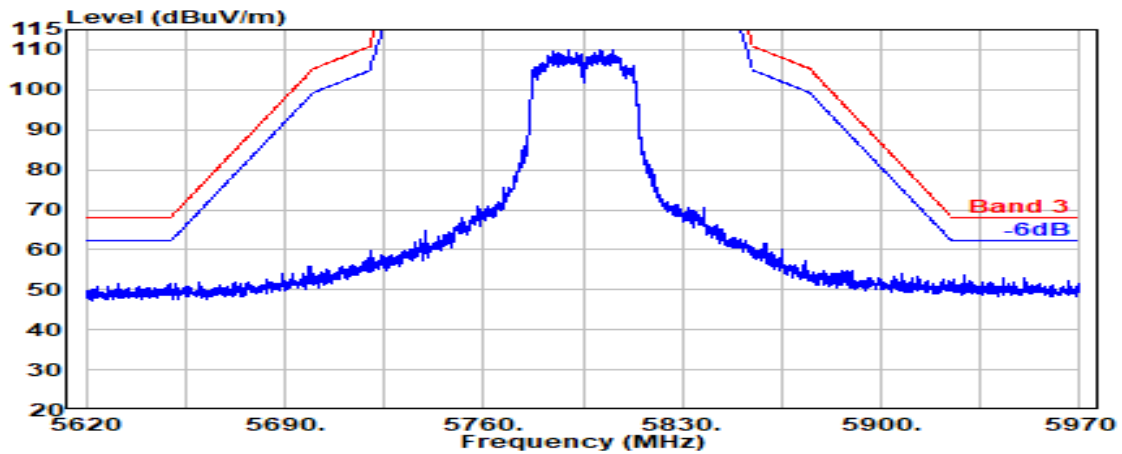


Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

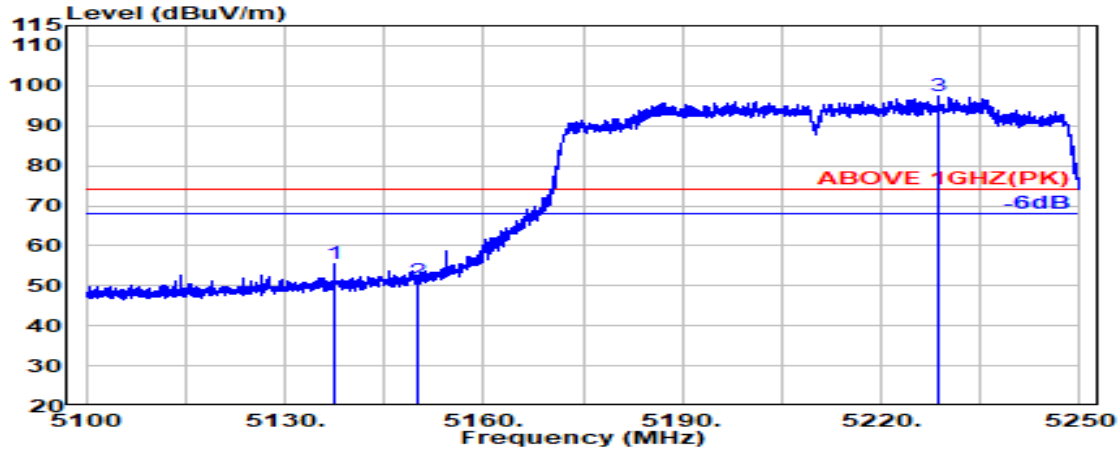

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.329	34.15	8.54	39.27	52.04	55.45	74.00	18.55	Peak
5150.000	34.20	8.54	39.27	47.57	51.04	74.00	22.96	Peak
@ 5228.571	34.36	8.59	39.27	93.61	97.29	---	---	Peak

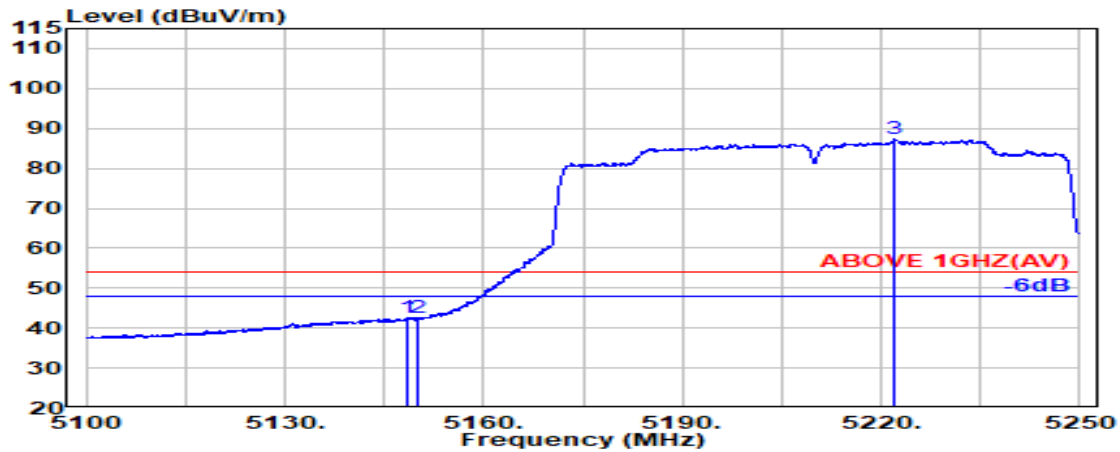


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.19	8.54	39.27	39.06	42.52	54.00	11.48	Average
5150.000	34.20	8.54	39.27	39.03	42.50	54.00	11.50	Average
@ 5222.100	34.34	8.59	39.27	83.61	87.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

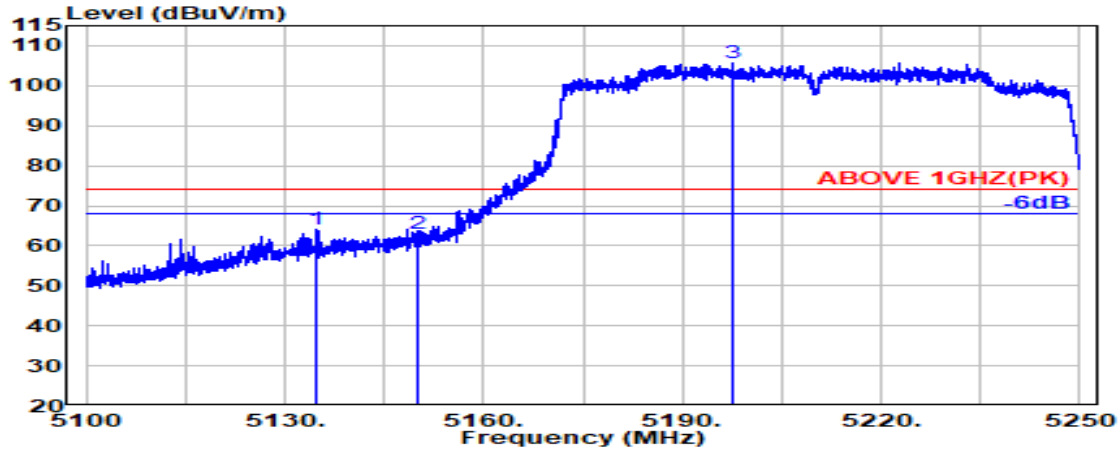

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.886	34.14	8.53	39.27	60.84	64.24	74.00	9.76	Peak
5150.000	34.20	8.54	39.27	59.45	62.92	74.00	11.08	Peak
@ 5197.457	34.29	8.57	39.27	102.11	105.71	---	---	Peak

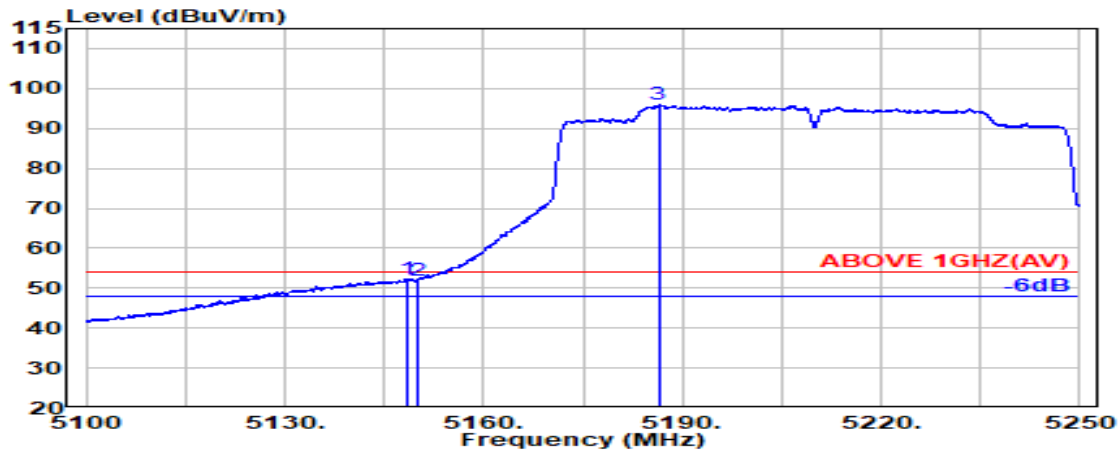


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.643	34.19	8.54	39.27	48.91	52.38	54.00	1.62	Average
5150.000	34.20	8.54	39.27	48.47	51.95	54.00	2.05	Average
@ 5186.400	34.27	8.57	39.27	92.30	95.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

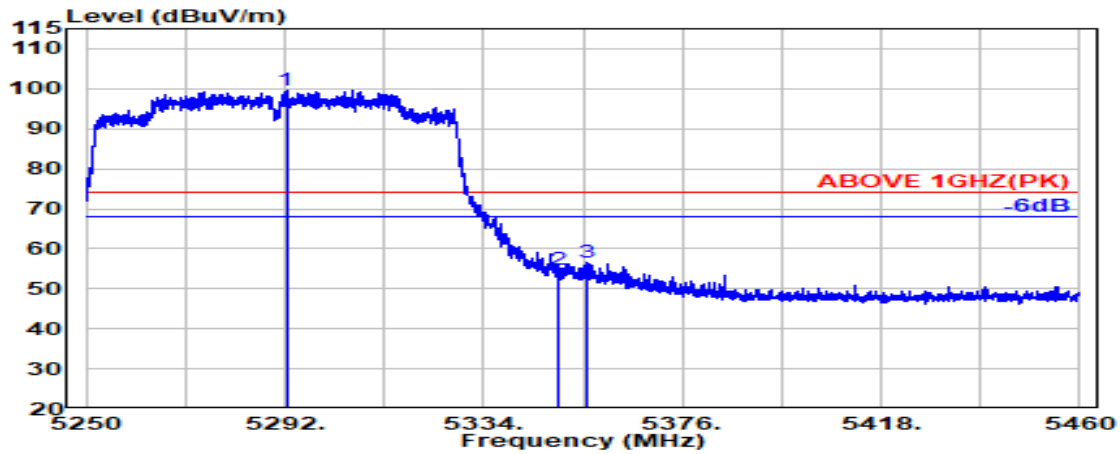

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
@ 5292.300	34.57	8.63	39.26	95.64	99.58	---	---	Peak
5350.000	34.50	8.67	39.26	50.74	54.64	74.00	19.36	Peak
5355.720	34.51	8.67	39.26	52.75	56.67	74.00	17.33	Peak

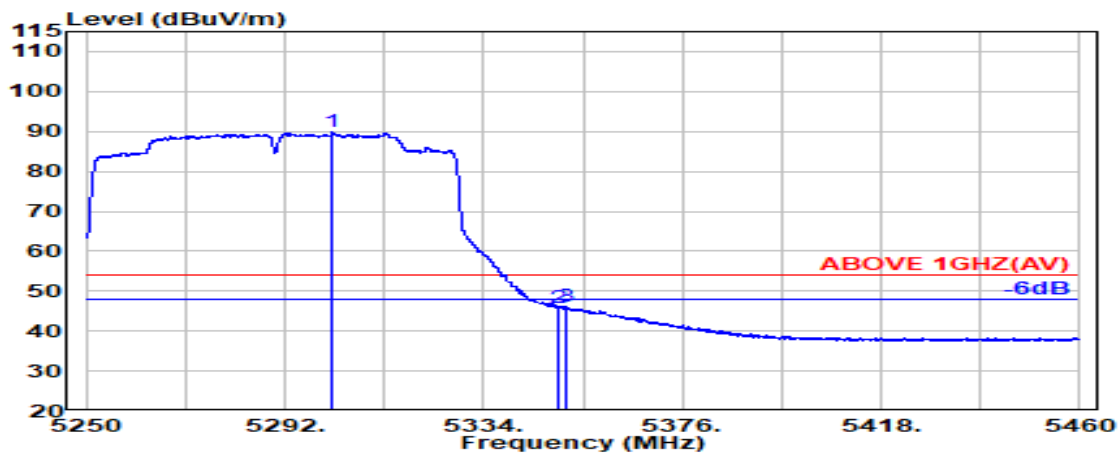


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
@ 5302.080	34.60	8.64	39.26	85.85	89.82	---	---	Average
5350.000	34.50	8.67	39.26	42.04	45.94	54.00	8.06	Average
5351.220	34.50	8.67	39.26	42.27	46.18	54.00	7.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

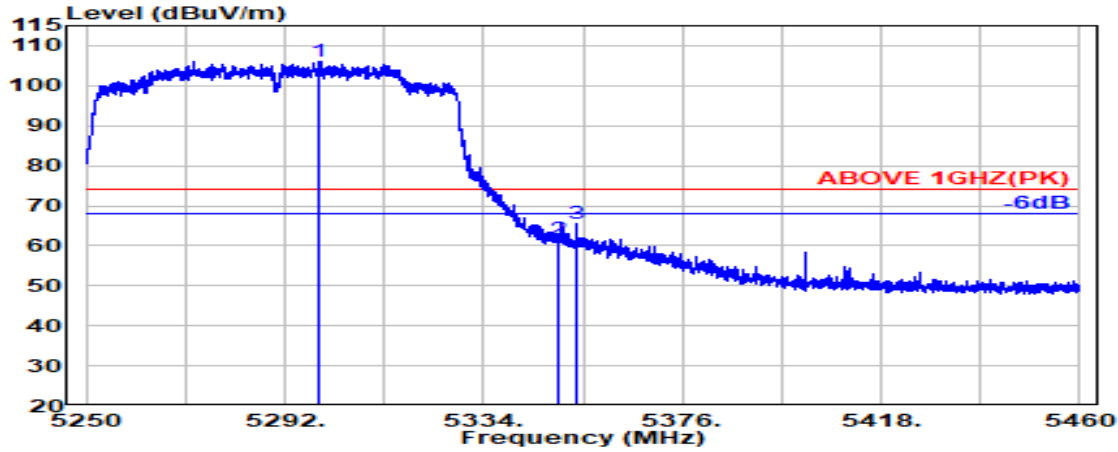

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.260	34.60	8.63	39.26	102.05	106.02	---	---	Peak
5350.000	34.50	8.67	39.26	57.71	61.61	74.00	12.39	Peak
5353.440	34.51	8.67	39.26	61.58	65.49	74.00	8.51	Peak

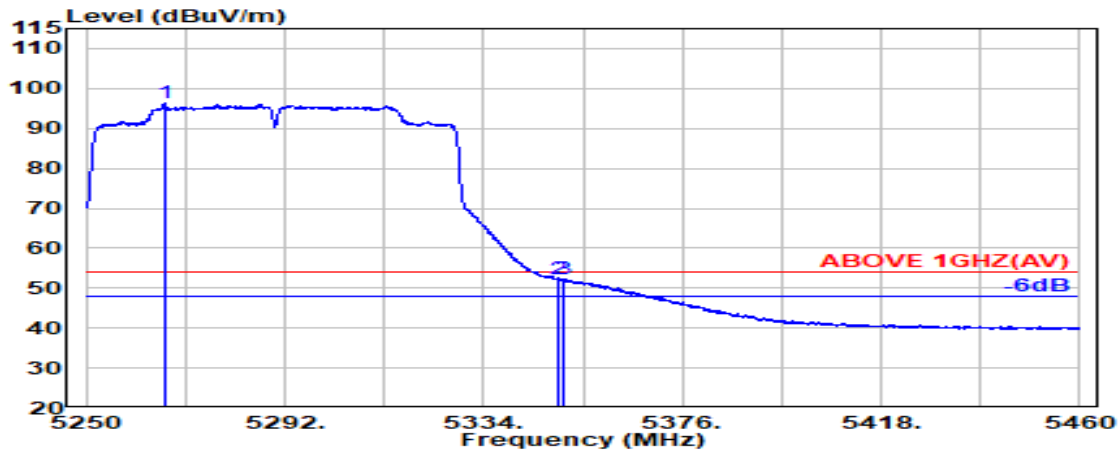


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.500	34.47	8.62	39.26	92.38	96.20	---	---	Average
5350.000	34.50	8.67	39.26	48.45	52.35	54.00	1.65	Average
5350.800	34.50	8.67	39.26	48.44	52.35	54.00	1.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

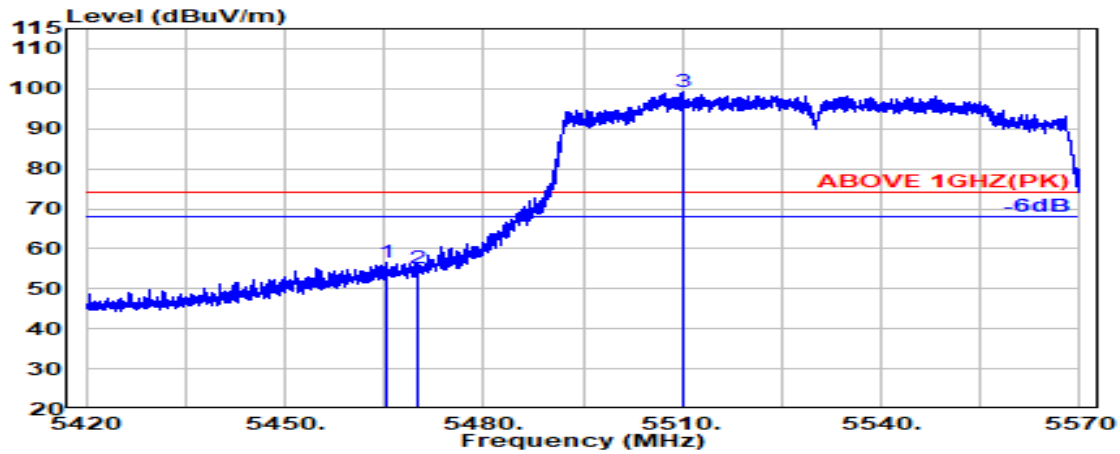

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.76	8.73	39.25	52.41	56.65	74.00	17.35	Peak
5470.000	34.78	8.74	39.25	50.87	55.14	74.00	18.86	Peak
@ 5510.214	34.88	8.76	39.25	94.87	99.26	---	---	Peak

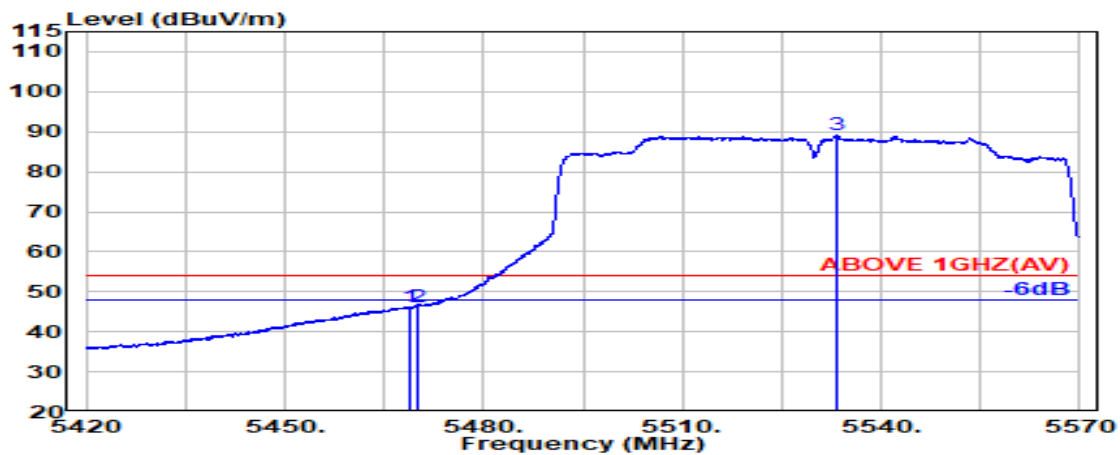


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	42.08	46.34	54.00	7.66	Average
5470.000	34.78	8.74	39.25	41.98	46.25	54.00	7.75	Average
@ 5533.314	34.83	8.77	39.26	84.67	89.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

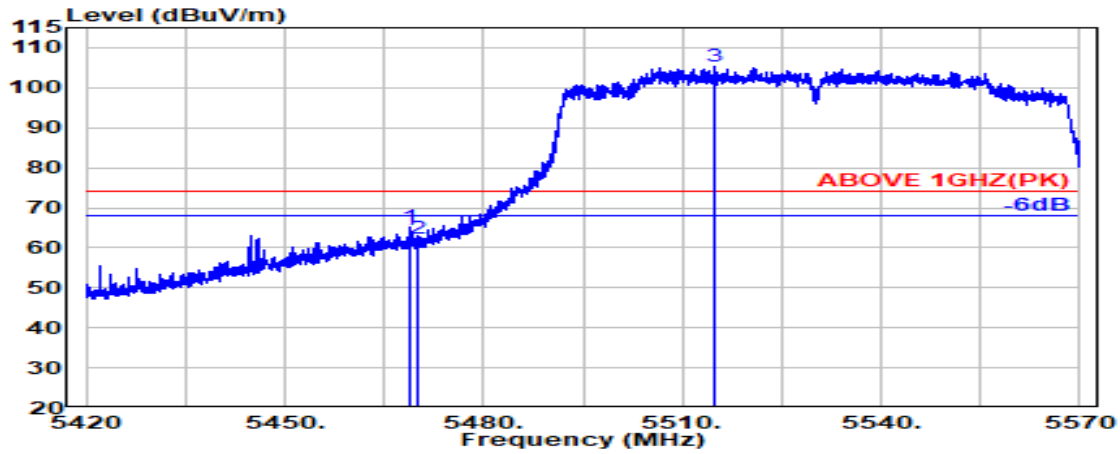

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.771	34.78	8.74	39.25	60.87	65.13	74.00	8.87	Peak
5470.000	34.78	8.74	39.25	58.08	62.34	74.00	11.66	Peak
@ 5514.843	34.87	8.76	39.25	100.92	105.30	---	---	Peak

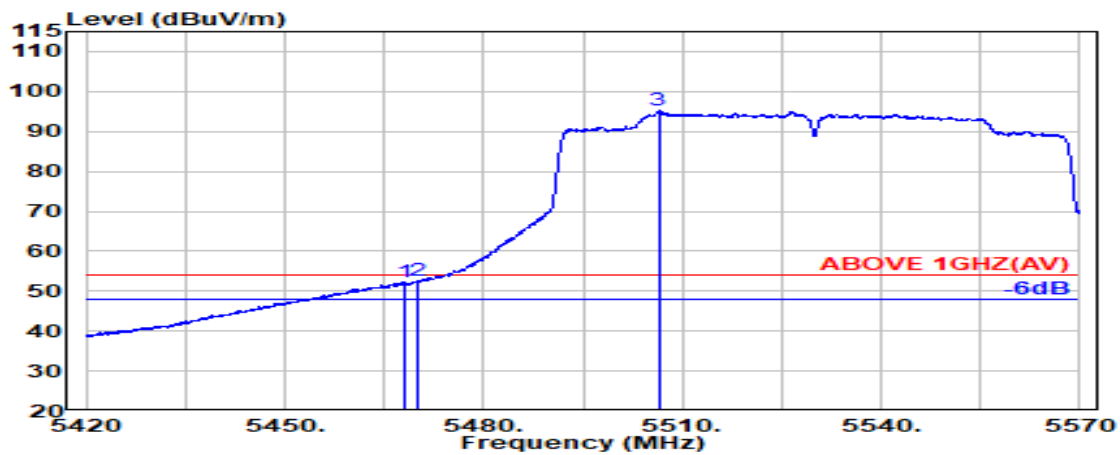


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.957	34.77	8.73	39.25	47.96	52.22	54.00	1.78	Average
5470.000	34.78	8.74	39.25	48.22	52.49	54.00	1.51	Average
@ 5506.400	34.89	8.76	39.25	90.73	95.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

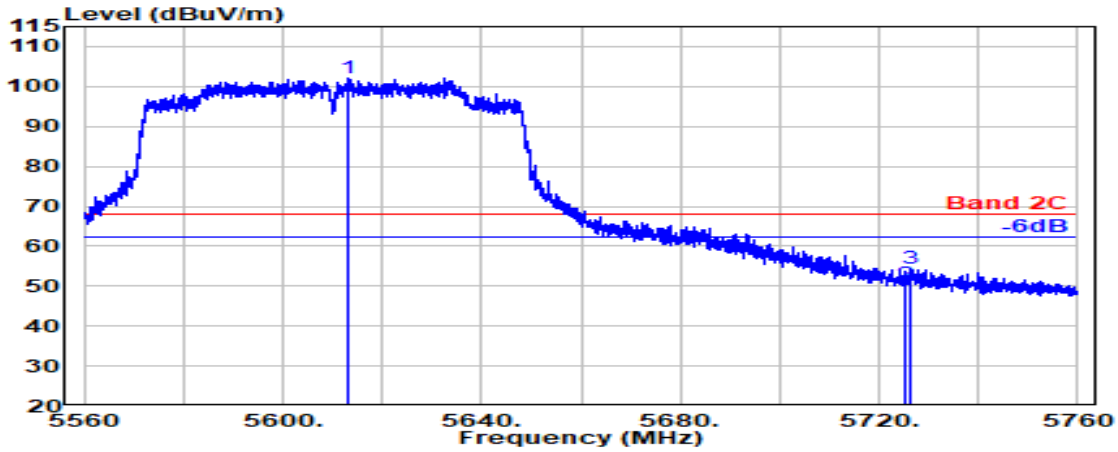

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5613.314	34.67	8.82	39.27	97.81	102.03	---	---	Peak
	5725.000	34.45	8.88	39.29	46.40	50.44	68.20	17.76	Peak
	5726.514	34.45	8.88	39.29	50.20	54.24	68.20	13.96	Peak

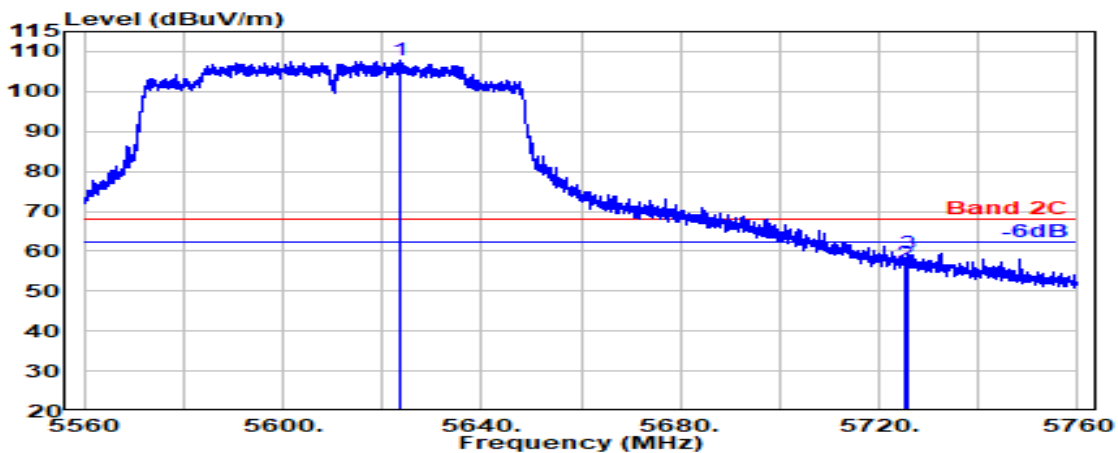


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5623.543	34.65	8.82	39.27	103.55	107.75	---	---	Peak
	5725.000	34.45	8.88	39.29	52.85	56.89	68.20	11.31	Peak
	5725.600	34.45	8.88	39.29	55.41	59.45	68.20	8.75	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

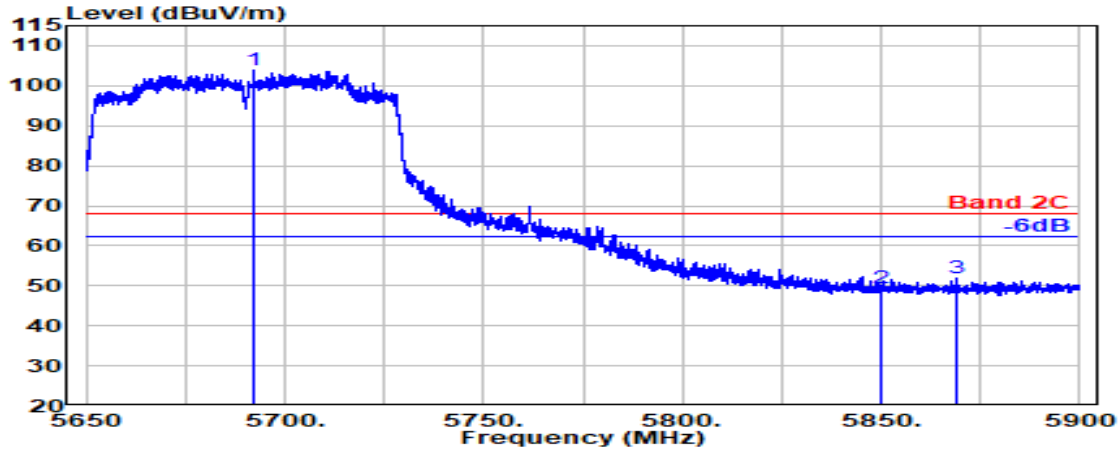

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5692.357	34.43	8.86	39.29	99.80	103.80	---	---	Peak
5850.000	34.70	8.95	39.31	45.12	49.45	68.20	18.75	Peak
5869.214	34.74	8.96	39.32	47.46	51.84	68.20	16.36	Peak

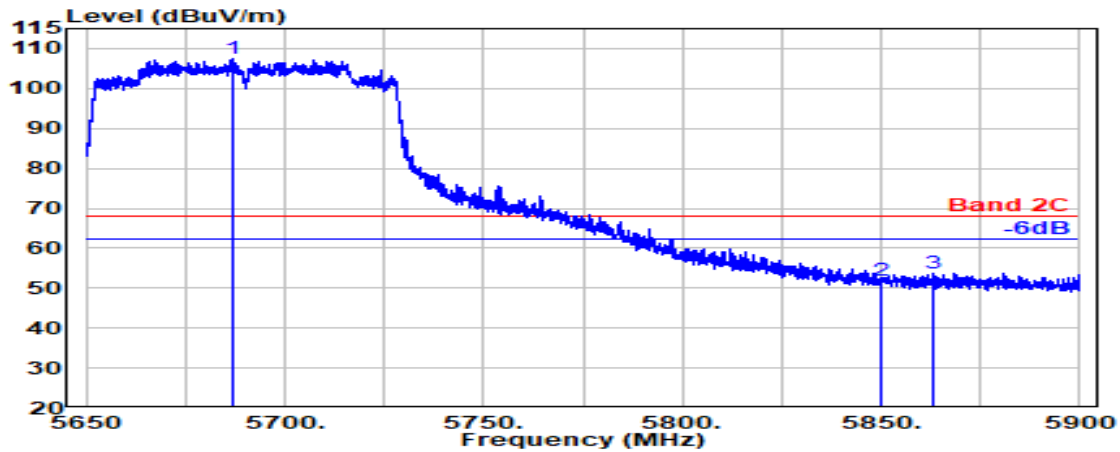


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5686.643	34.45	8.86	39.28	103.48	107.51	---	---	Peak
5850.000	34.70	8.95	39.31	47.73	52.06	68.20	16.14	Peak
5863.143	34.73	8.96	39.32	49.48	53.85	68.20	14.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

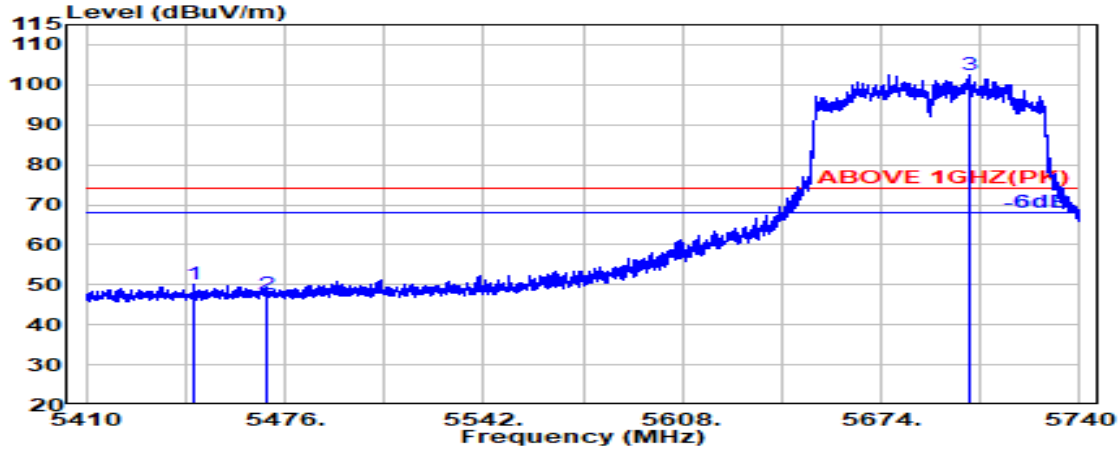

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.452	34.69	8.72	39.25	45.87	50.03	74.00	23.97	Peak
5470.000	34.78	8.74	39.25	43.26	47.52	74.00	26.48	Peak
@ 5703.134	34.41	8.87	39.29	98.37	102.35	---	---	Peak

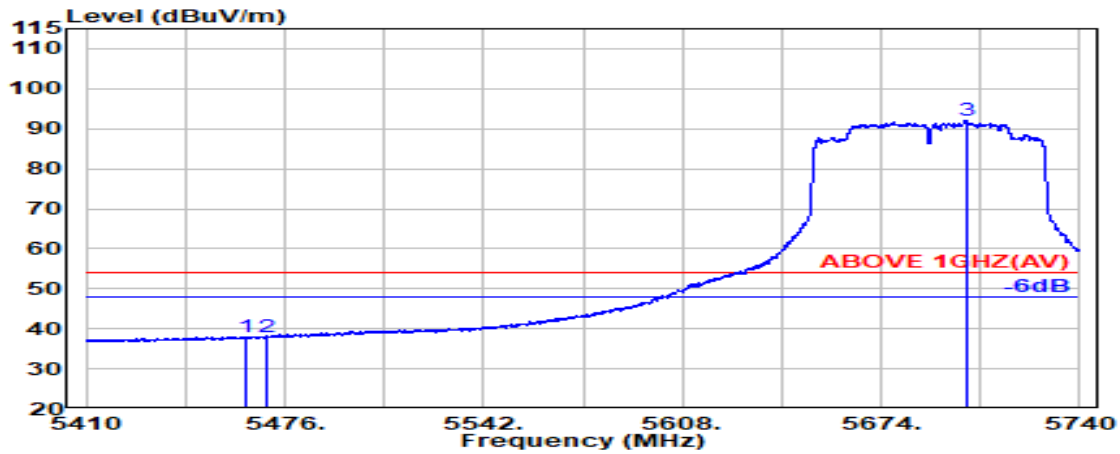


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.083	34.75	8.73	39.25	33.86	38.09	54.00	15.91	Average
5470.000	34.78	8.74	39.25	33.78	38.05	54.00	15.95	Average
@ 5702.286	34.40	8.87	39.29	88.06	92.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

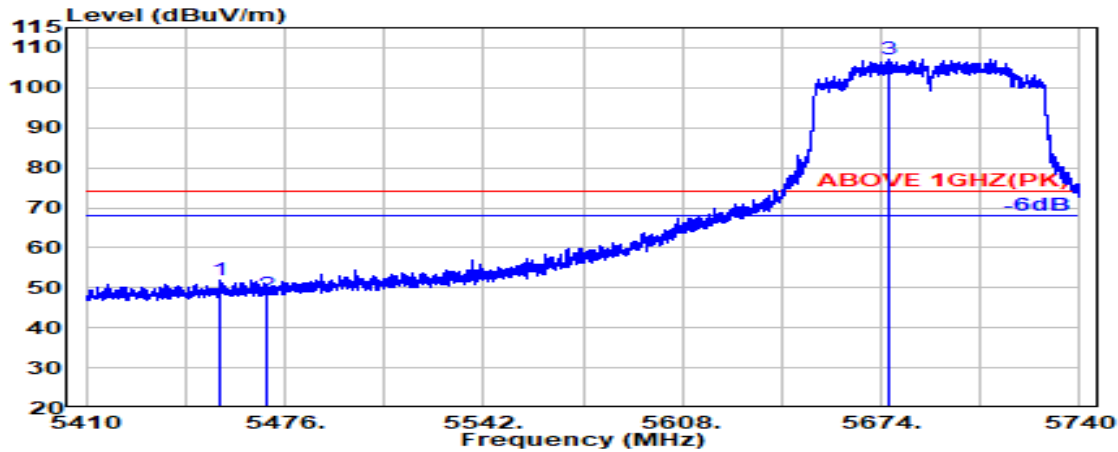

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.503	34.72	8.73	39.25	47.73	51.92	74.00	22.08	Peak
5470.000	34.78	8.74	39.25	44.19	48.45	74.00	25.55	Peak
@ 5676.263	34.49	8.85	39.28	103.10	107.17	---	---	Peak

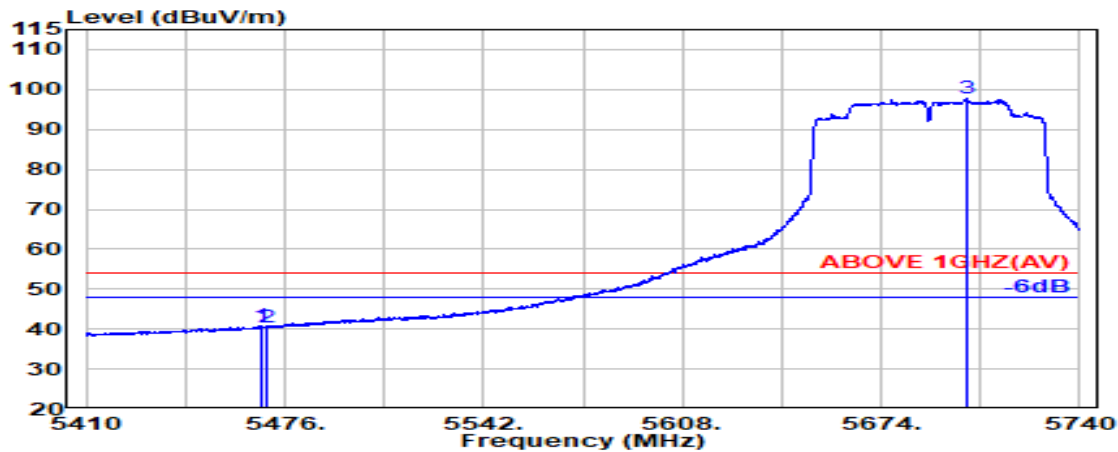


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.363	34.77	8.73	39.25	36.46	40.71	54.00	13.29	Average
5470.000	34.78	8.74	39.25	36.29	40.55	54.00	13.45	Average
@ 5702.286	34.40	8.87	39.29	93.70	97.68	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

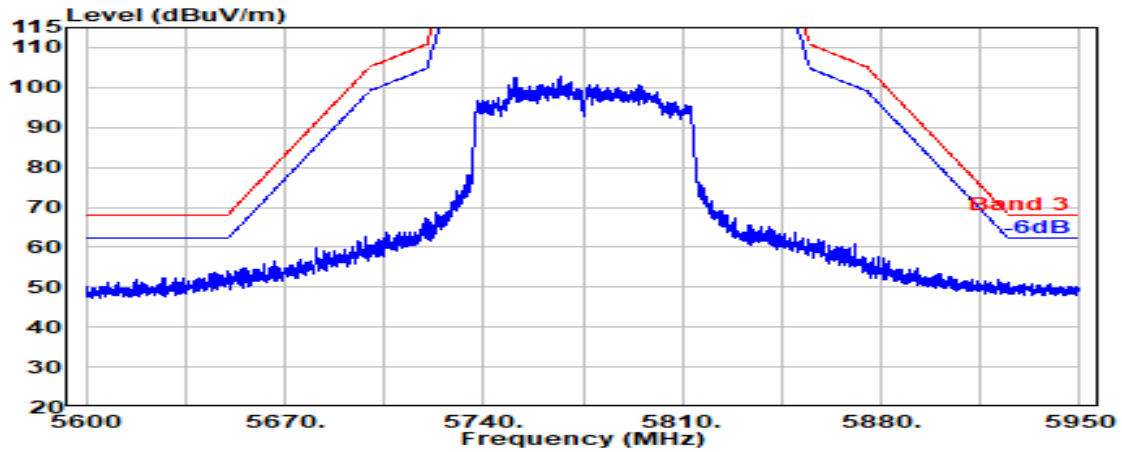


Antenna at Vertical Polarization

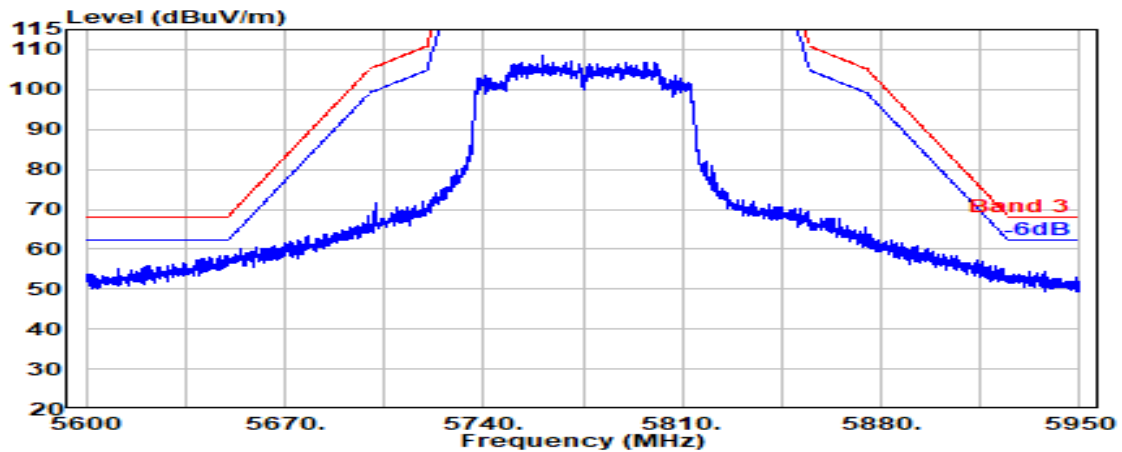




Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

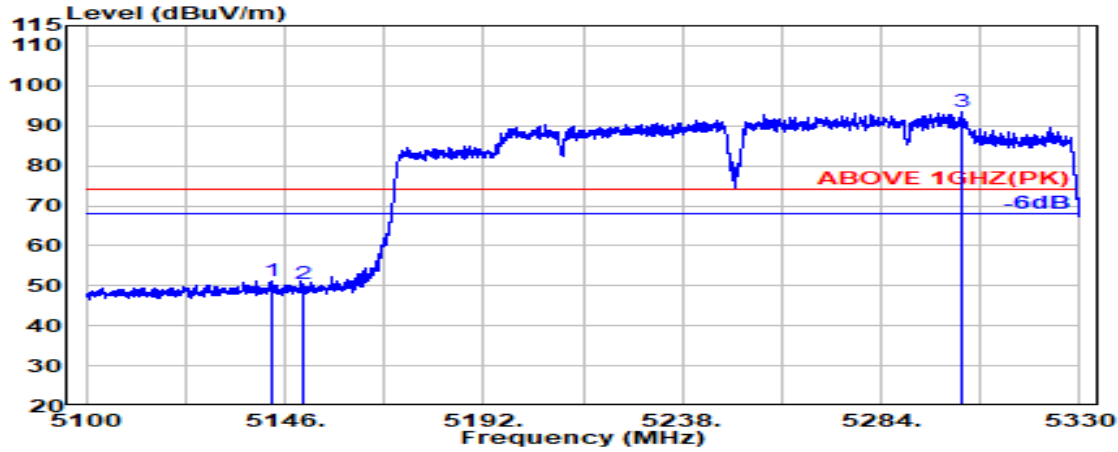

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	34.17	8.54	39.27	47.79	51.24	74.00	22.76	Peak
5150.000	34.20	8.54	39.27	47.03	50.50	74.00	23.50	Peak
@ 5302.500	34.59	8.64	39.26	89.38	93.35	---	---	Peak

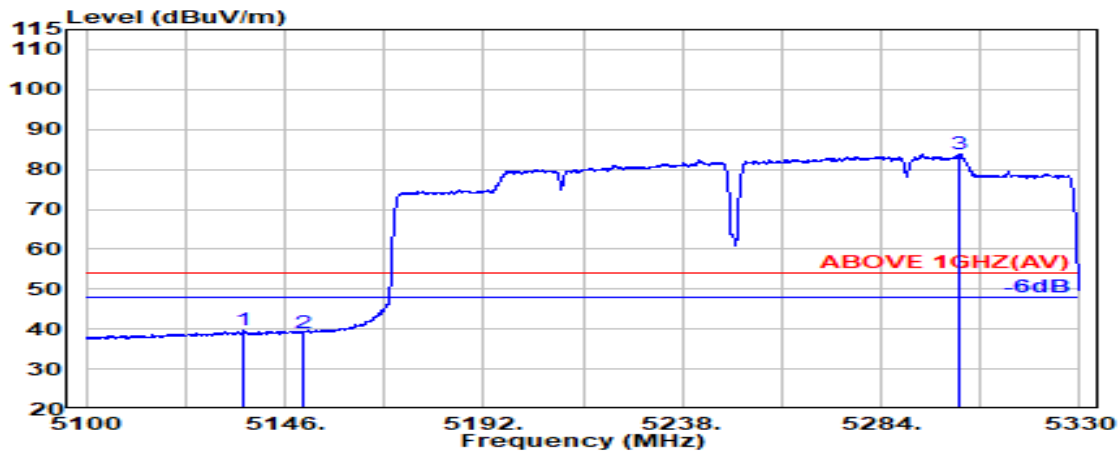


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.600	34.15	8.54	39.27	36.29	39.70	54.00	14.30	Average
5150.000	34.20	8.54	39.27	35.67	39.15	54.00	14.85	Average
@ 5302.200	34.60	8.64	39.26	79.98	83.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

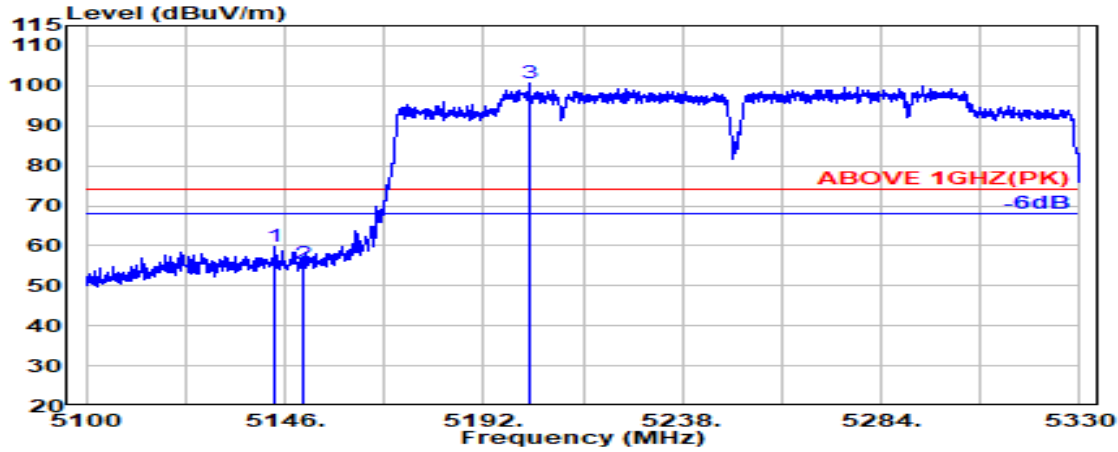

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.900	34.18	8.54	39.27	56.28	59.72	74.00	14.28	Peak
5150.000	34.20	8.54	39.27	51.95	55.42	74.00	18.58	Peak
@ 5202.500	34.31	8.58	39.27	96.89	100.50	---	---	Peak

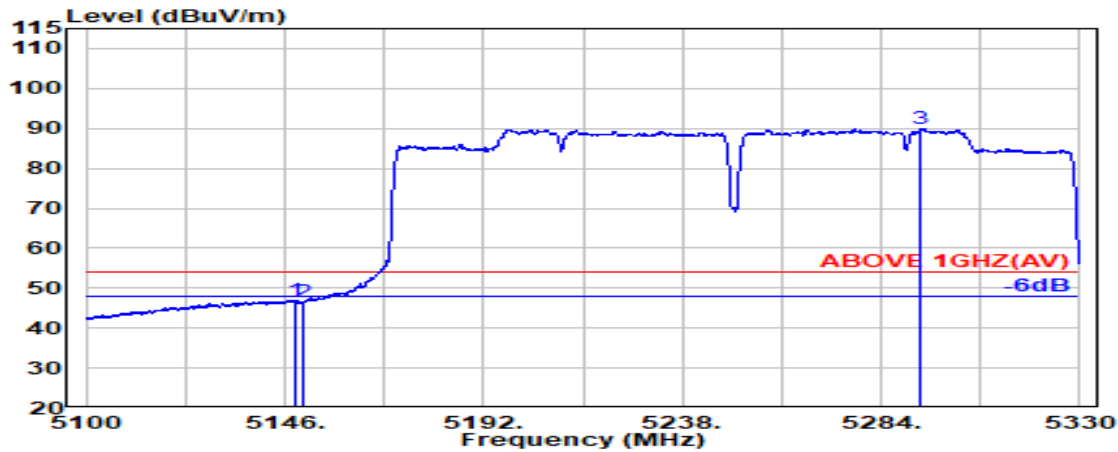


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.27	43.53	47.00	54.00	7.00	Average
5150.000	34.20	8.54	39.27	43.03	46.51	54.00	7.49	Average
@ 5293.300	34.57	8.63	39.26	86.13	90.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

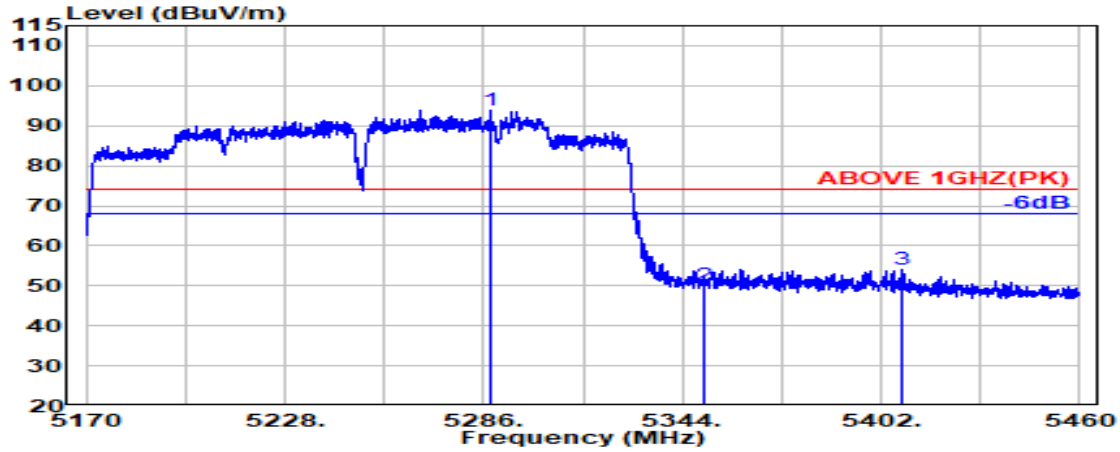

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.000	34.55	8.63	39.26	89.83	93.75	---	---	Peak
5350.000	34.50	8.67	39.26	46.32	50.23	74.00	23.77	Peak
5407.800	34.62	8.70	39.26	50.11	54.17	74.00	19.83	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.400	34.60	8.64	39.26	79.75	83.72	---	---	Average
5350.000	34.50	8.67	39.26	38.16	42.06	54.00	11.94	Average
5356.700	34.51	8.67	39.26	39.03	42.96	54.00	11.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

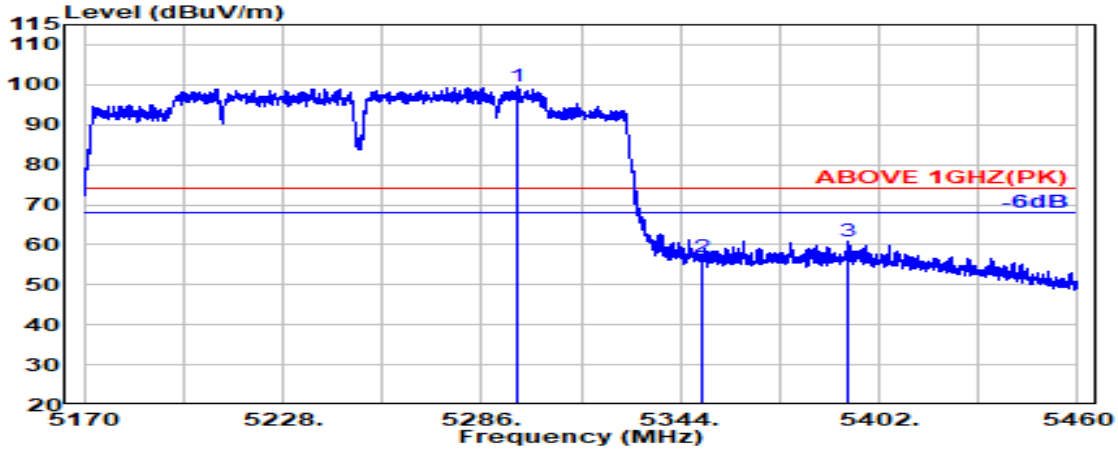

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.100	34.58	8.63	39.26	95.76	99.71	---	---	Peak
5350.000	34.50	8.67	39.26	52.93	56.84	74.00	17.16	Peak
5393.200	34.59	8.69	39.26	57.00	61.02	74.00	12.98	Peak

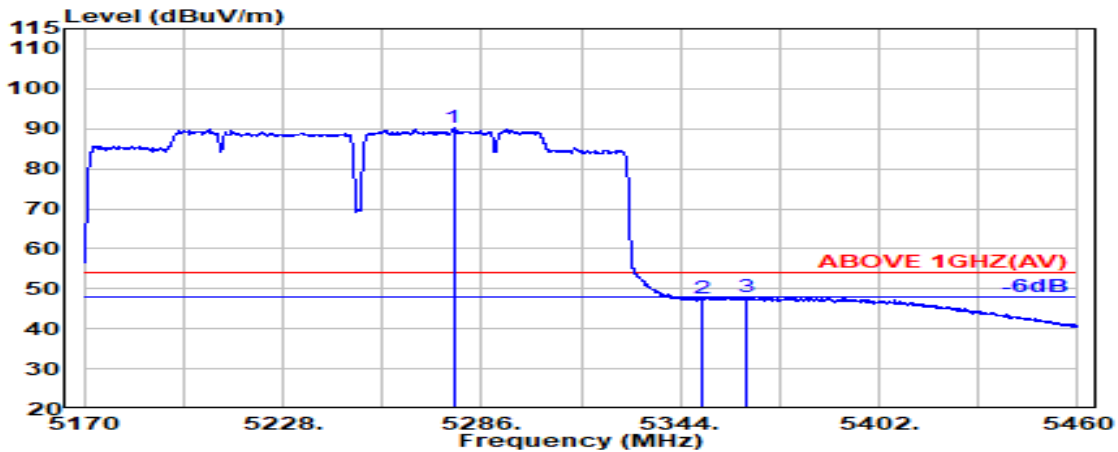


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.800	34.51	8.62	39.26	86.31	90.18	---	---	Average
5350.000	34.50	8.67	39.26	43.66	47.56	54.00	6.44	Average
5363.500	34.53	8.67	39.26	44.00	47.94	54.00	6.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

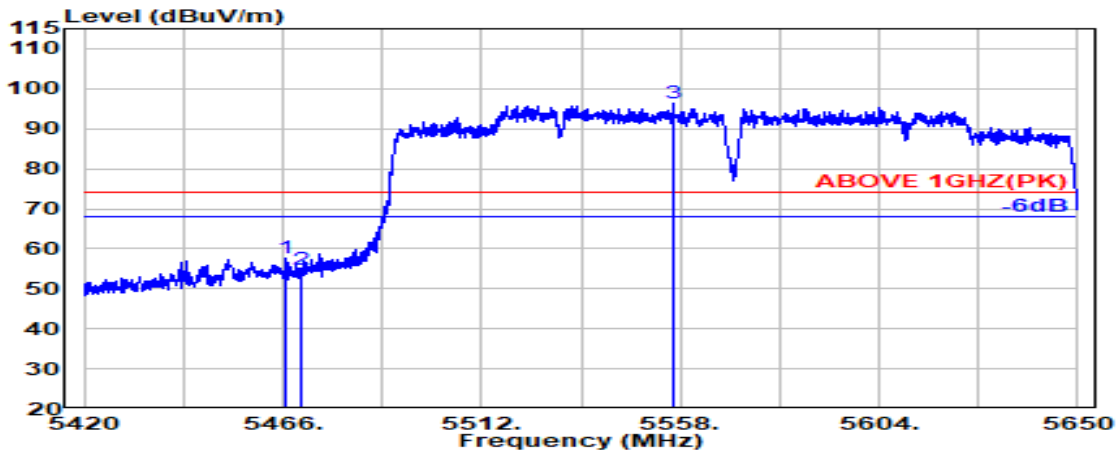

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.77	8.73	39.25	53.27	57.52	74.00	16.48	Peak
5470.000	34.78	8.74	39.25	50.62	54.89	74.00	19.11	Peak
@ 5556.200	34.79	8.79	39.26	91.89	96.21	---	---	Peak

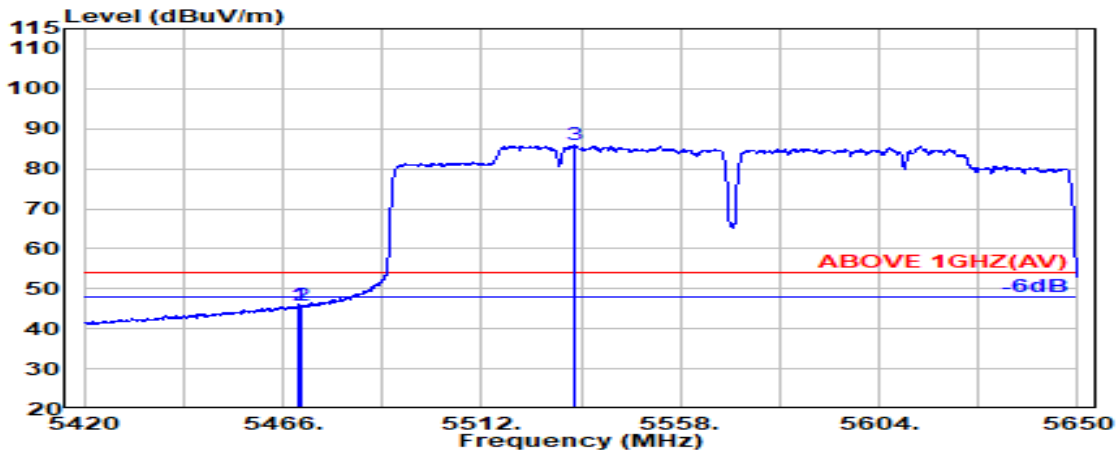


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.78	8.74	39.25	41.62	45.88	54.00	8.12	Average
5470.000	34.78	8.74	39.25	41.49	45.75	54.00	8.25	Average
@ 5533.400	34.83	8.77	39.26	81.56	85.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

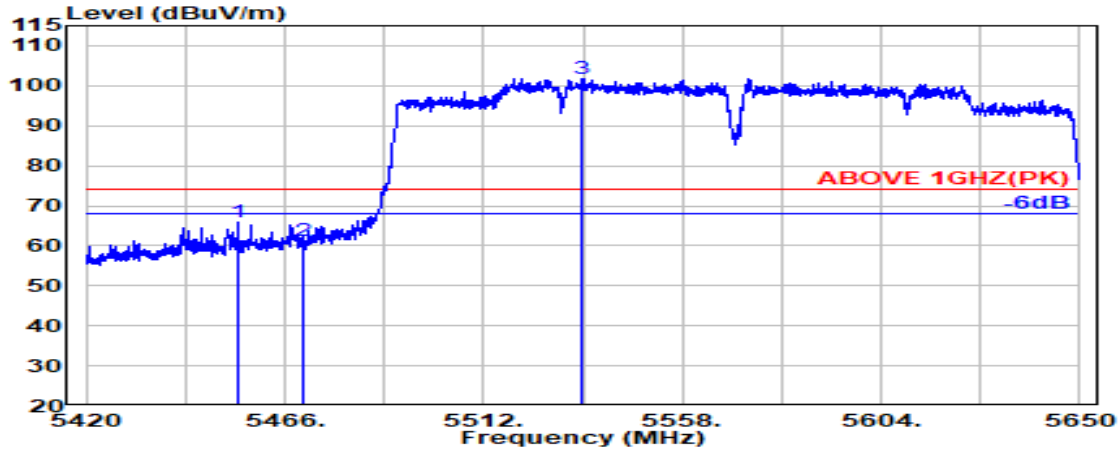

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.200	34.72	8.73	39.25	61.86	66.06	74.00	7.94	Peak
5470.000	34.78	8.74	39.25	56.88	61.14	74.00	12.86	Peak
@ 5534.900	34.83	8.77	39.26	97.43	101.77	---	---	Peak

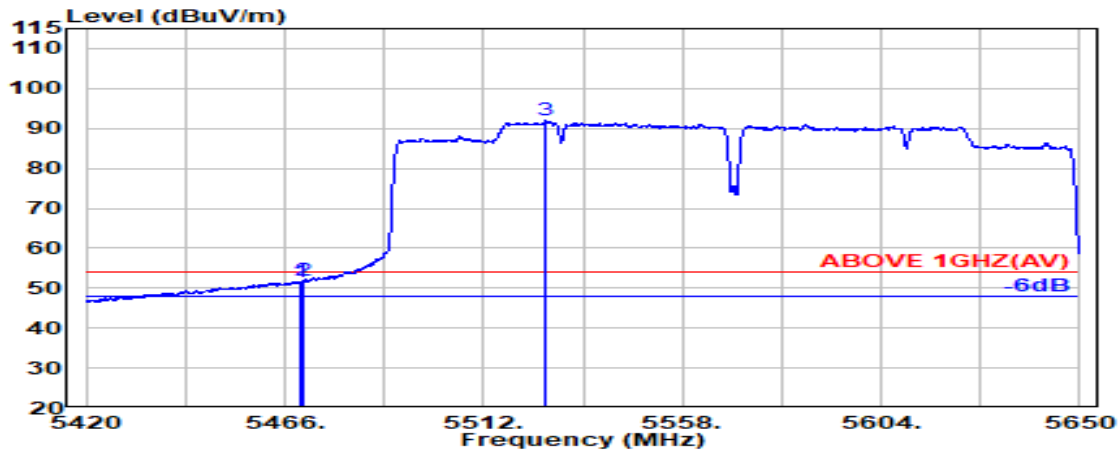


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.78	8.74	39.25	47.44	51.70	54.00	2.30	Average
5470.000	34.78	8.74	39.25	47.56	51.83	54.00	2.17	Average
@ 5526.500	34.85	8.77	39.25	87.64	92.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

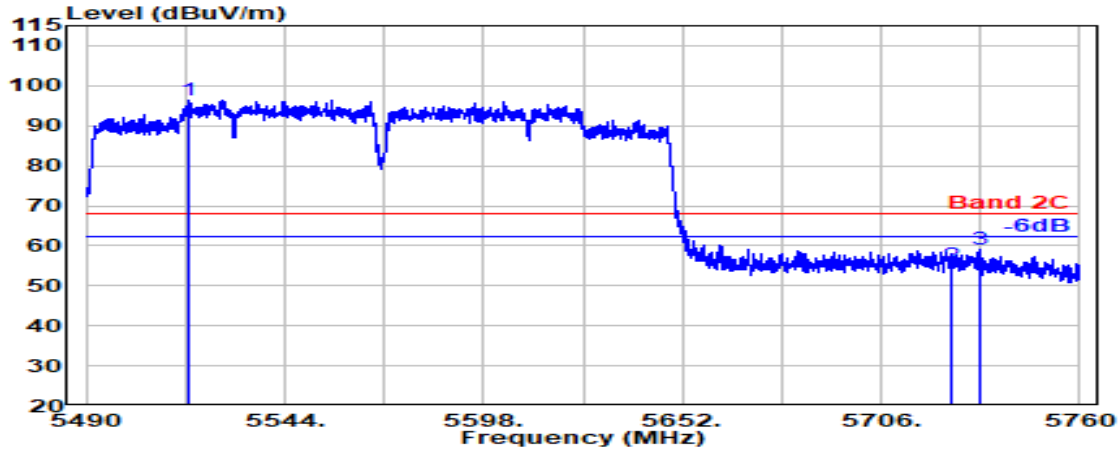

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5518.100	34.86	8.76	39.25	92.00	96.37	---	---	Peak
5725.000	34.45	8.88	39.29	51.21	55.25	68.20	12.95	Peak
5733.100	34.47	8.89	39.29	55.13	59.19	68.20	9.01	Peak

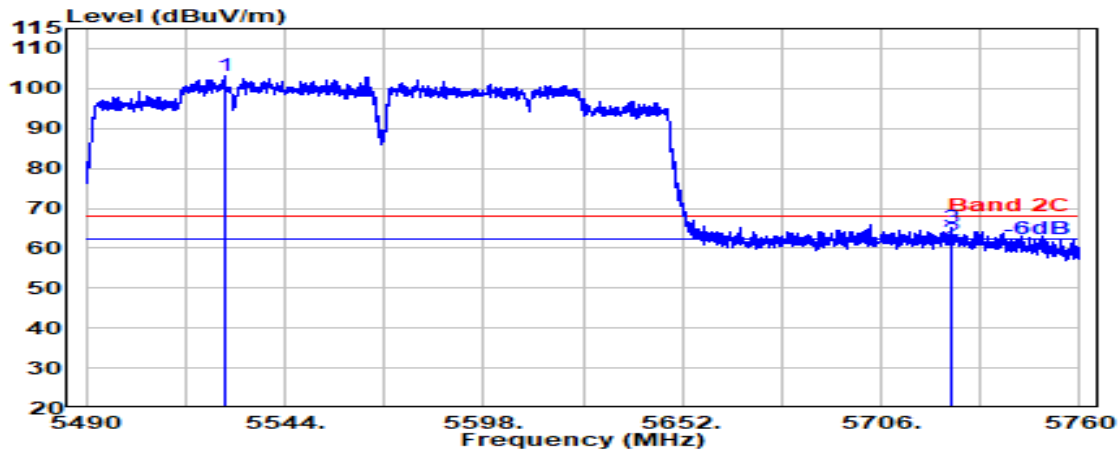


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5527.500	34.84	8.77	39.26	98.73	103.09	---	---	Peak
5725.000	34.45	8.88	39.29	57.74	61.78	68.20	6.42	Peak
5725.200	34.45	8.88	39.29	61.05	65.09	68.20	3.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

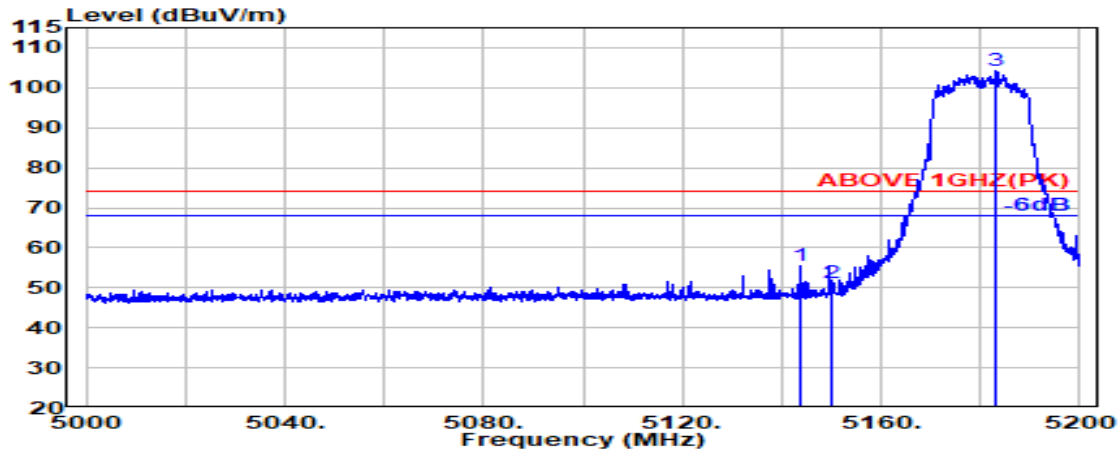

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.600	34.17	8.54	39.27	51.97	55.42	74.00	18.58	Peak
5150.000	34.20	8.54	39.27	47.59	51.06	74.00	22.94	Peak
@ 5183.200	34.27	8.56	39.27	100.59	104.16	---	---	Peak

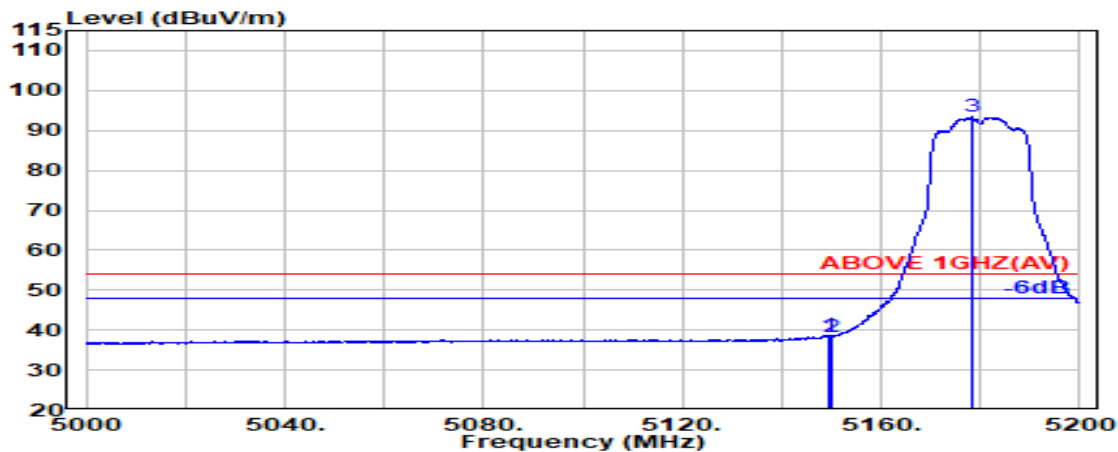


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	35.08	38.55	54.00	15.45	Average
5150.000	34.20	8.54	39.27	34.89	38.36	54.00	15.64	Average
@ 5178.300	34.26	8.56	39.27	89.91	93.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

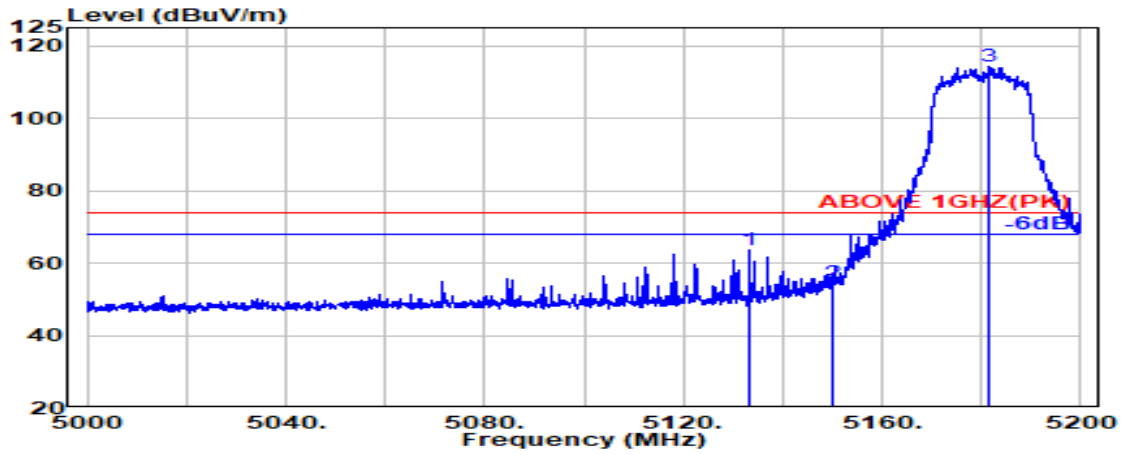

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.400	34.13	8.53	39.27	60.21	63.60	74.00	10.40	Peak
5150.000	34.20	8.54	39.27	51.13	54.61	74.00	19.39	Peak
@ 5181.700	34.26	8.56	39.27	110.60	114.15	---	---	Peak

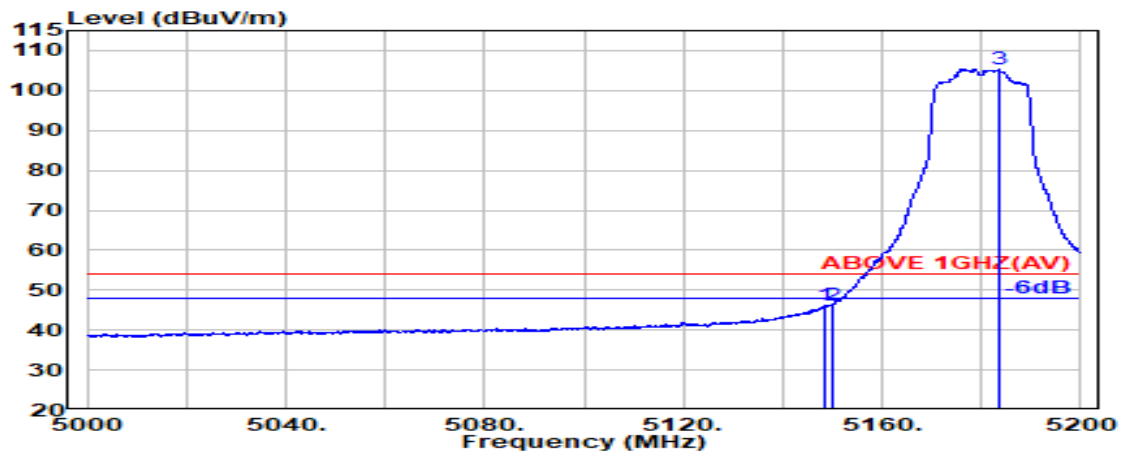


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	34.19	8.54	39.27	42.85	46.32	54.00	7.68	Average
5150.000	34.20	8.54	39.27	42.83	46.31	54.00	7.69	Average
@ 5183.700	34.27	8.56	39.27	101.81	105.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

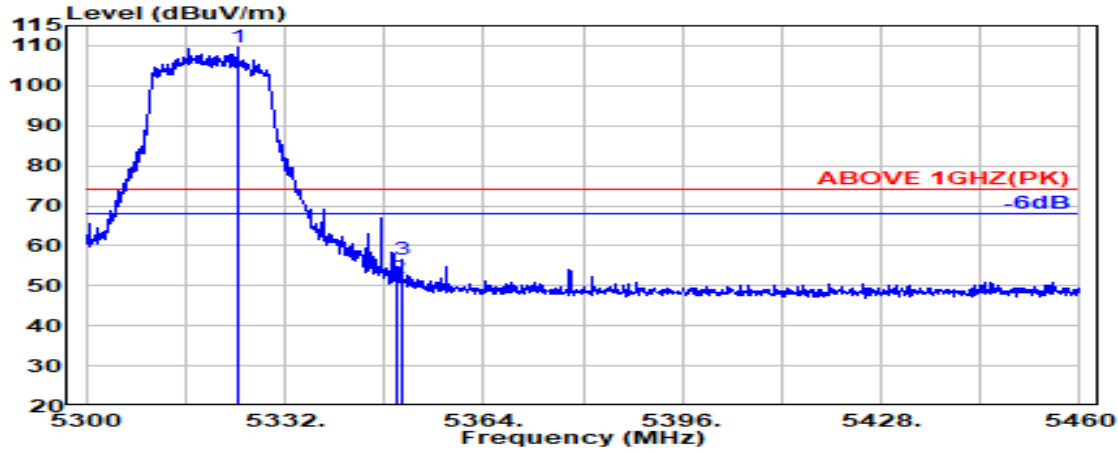

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.300	34.55	8.65	39.26	105.61	109.55	---	---	Peak
5350.000	34.50	8.67	39.26	47.83	51.74	74.00	22.26	Peak
5350.700	34.50	8.67	39.26	52.61	56.52	74.00	17.48	Peak

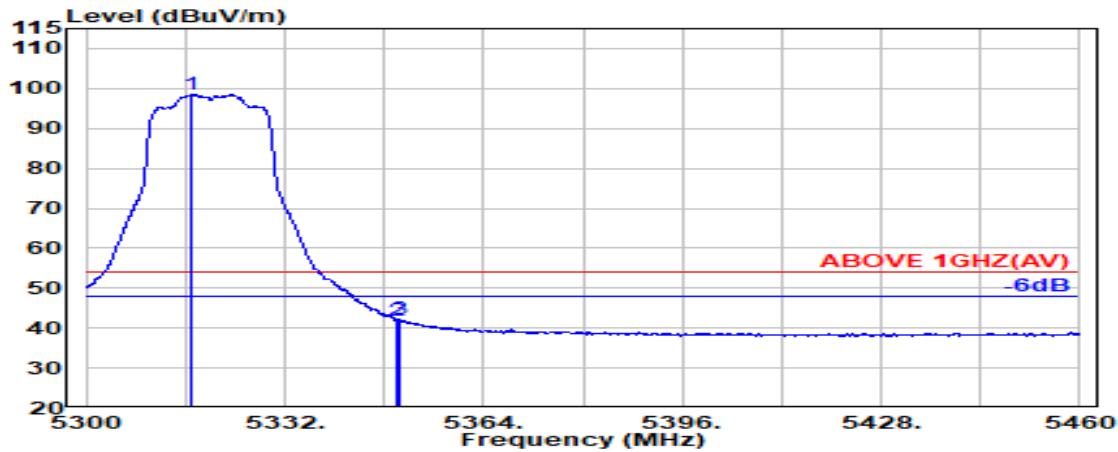


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.100	34.57	8.65	39.26	94.63	98.58	---	---	Average
5350.000	34.50	8.67	39.26	37.99	41.89	54.00	12.11	Average
5350.500	34.50	8.67	39.26	38.16	42.07	54.00	11.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

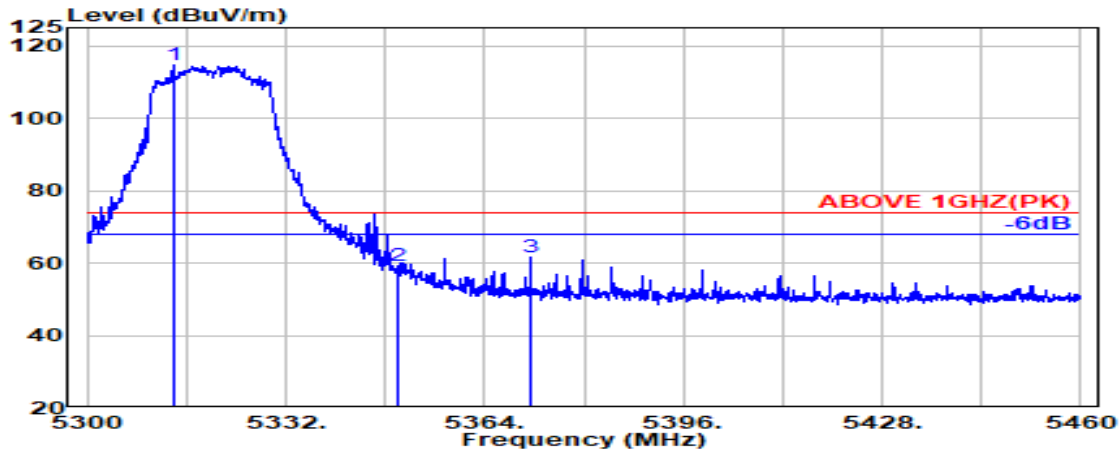

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.800	34.57	8.64	39.26	110.73	114.68	---	---	Peak
5350.000	34.50	8.67	39.26	55.32	59.23	74.00	14.77	Peak
5371.400	34.54	8.68	39.26	57.81	61.77	74.00	12.23	Peak

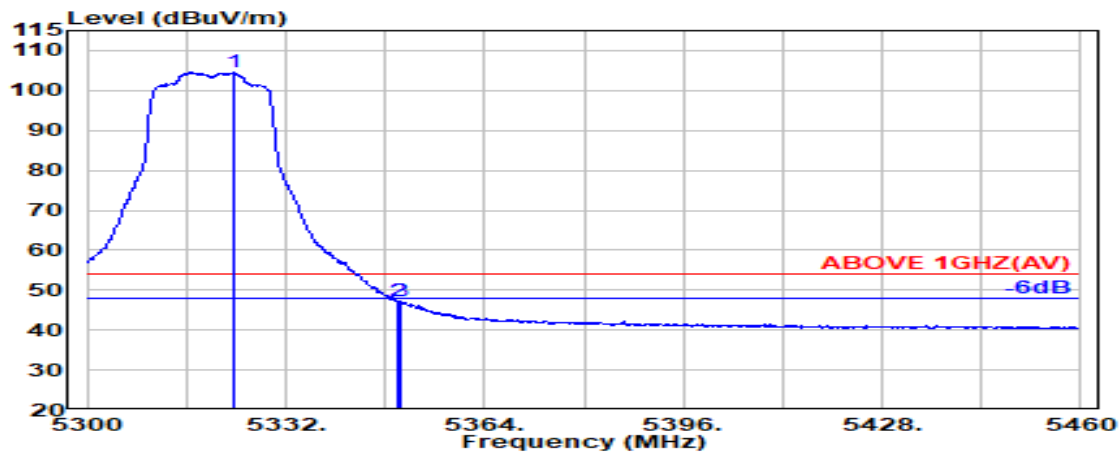


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.55	8.65	39.26	100.70	104.64	---	---	Average
5350.000	34.50	8.67	39.26	43.17	47.07	54.00	6.93	Average
5350.400	34.50	8.67	39.26	43.22	47.13	54.00	6.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

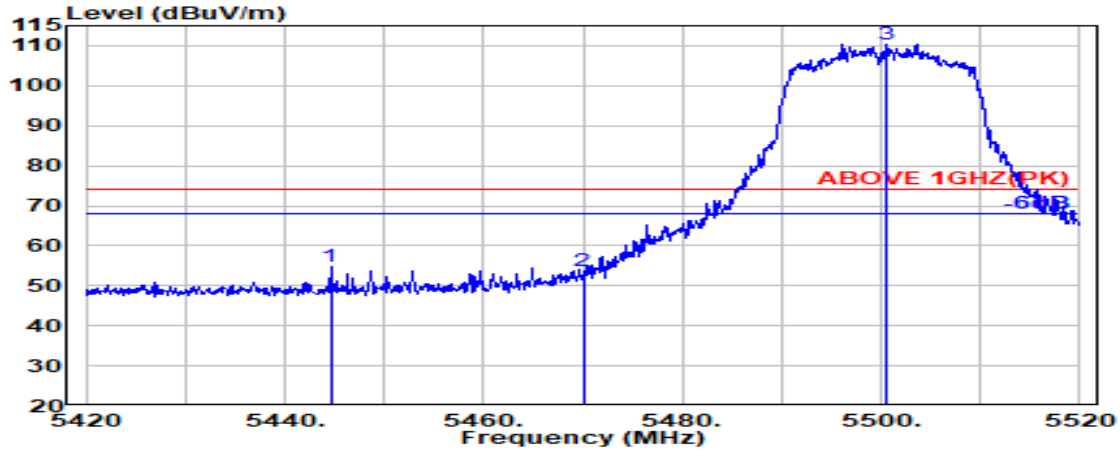

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.600	34.69	8.72	39.25	50.47	54.62	74.00	19.38	Peak
5470.000	34.78	8.74	39.25	49.47	53.74	74.00	20.26	Peak
@ 5500.500	34.90	8.75	39.25	105.90	110.30	---	---	Peak

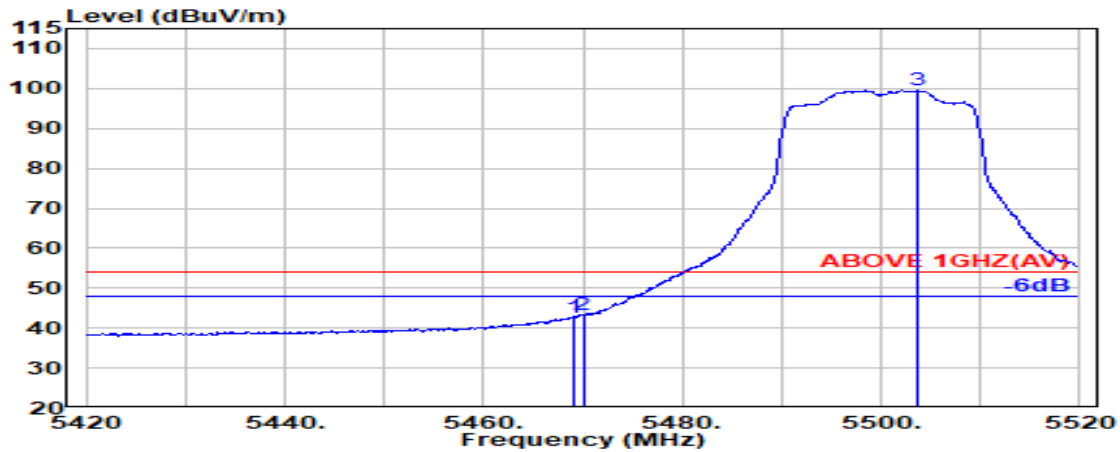


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	38.47	42.73	54.00	11.27	Average
5470.000	34.78	8.74	39.25	39.09	43.36	54.00	10.64	Average
@ 5503.600	34.89	8.76	39.25	95.18	99.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

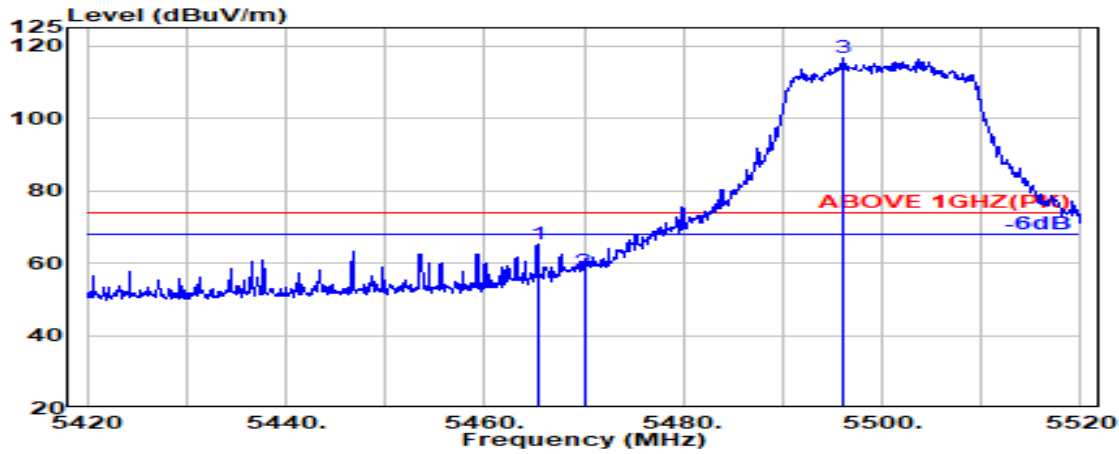

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.76	8.73	39.25	60.82	65.06	74.00	8.94	Peak
5470.000	34.78	8.74	39.25	53.47	57.74	74.00	16.26	Peak
@ 5496.000	34.88	8.75	39.25	112.30	116.68	---	---	Peak

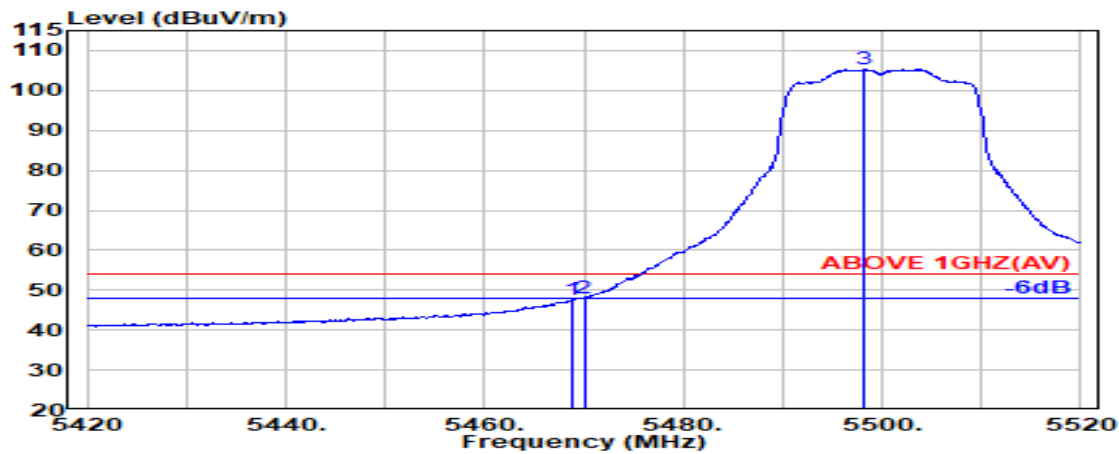


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	43.47	47.73	54.00	6.27	Average
5470.000	34.78	8.74	39.25	43.68	47.94	54.00	6.06	Average
@ 5498.200	34.89	8.75	39.25	101.05	105.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

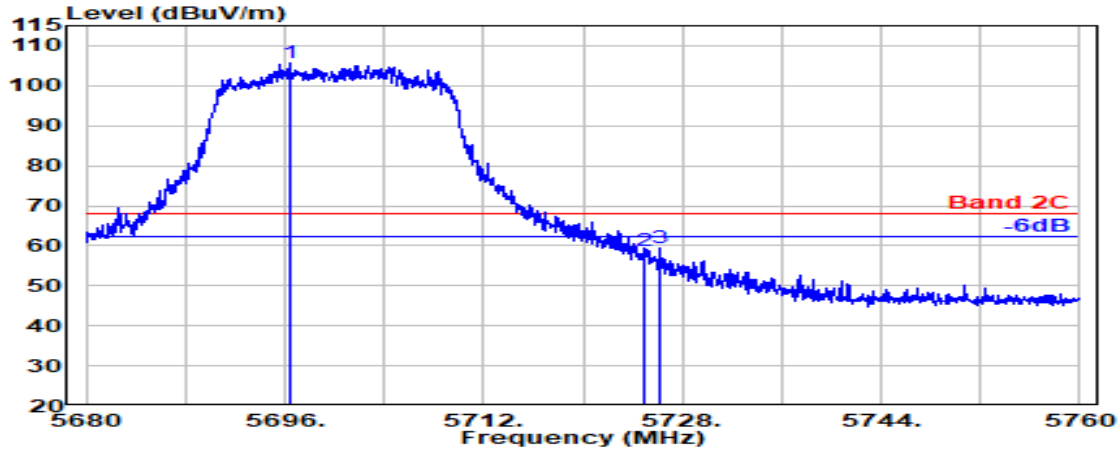

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.400	34.41	8.86	39.29	101.67	105.67	---	---	Peak
5725.000	34.45	8.88	39.29	54.54	58.58	68.20	9.62	Peak
5726.250	34.45	8.88	39.29	55.28	59.32	68.20	8.88	Peak

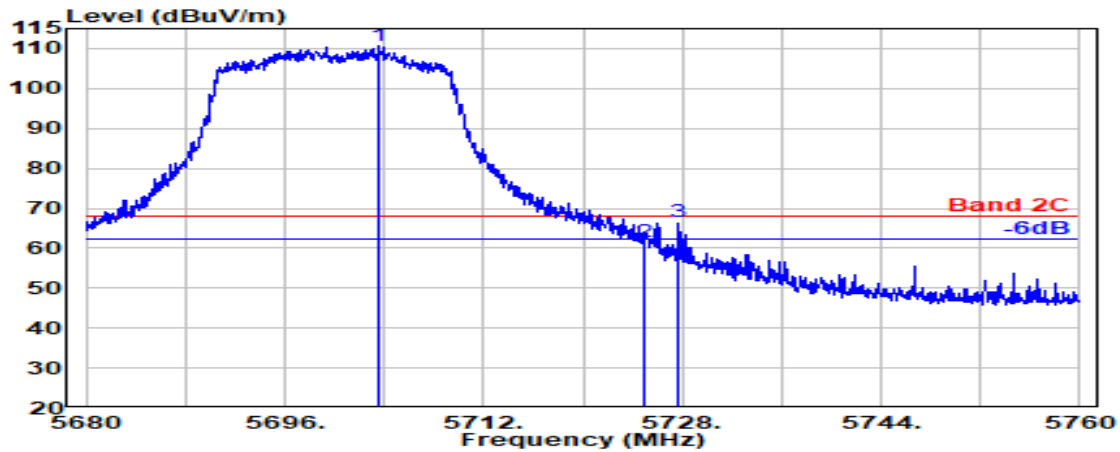


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.600	34.41	8.87	39.29	106.60	110.59	---	---	Peak
5725.000	34.45	8.88	39.29	57.45	61.49	68.20	6.71	Peak
5727.750	34.46	8.88	39.29	62.63	66.67	68.20	1.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

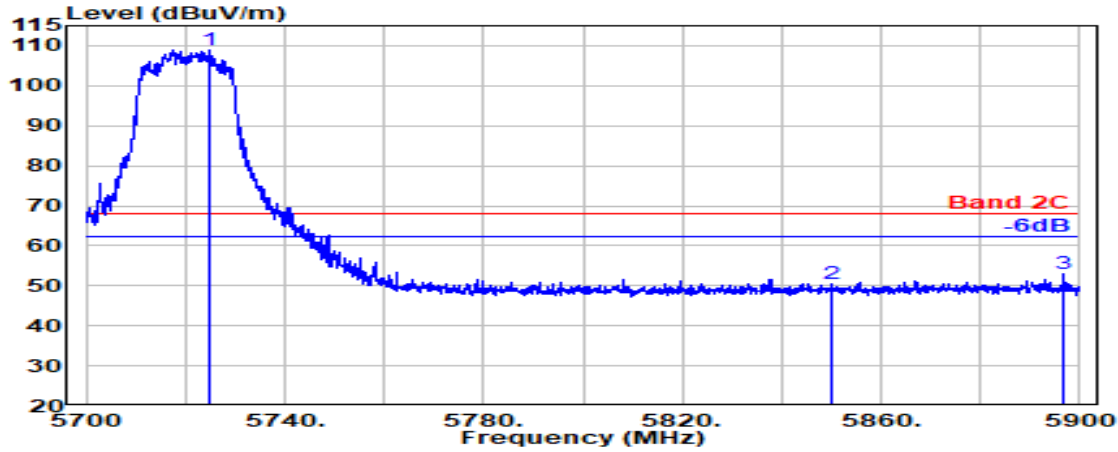

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.900	34.45	8.88	39.29	104.72	108.76	---	---	Peak
5850.000	34.70	8.95	39.31	46.08	50.42	68.20	17.78	Peak
5896.900	34.79	8.97	39.32	48.48	52.93	68.20	15.27	Peak

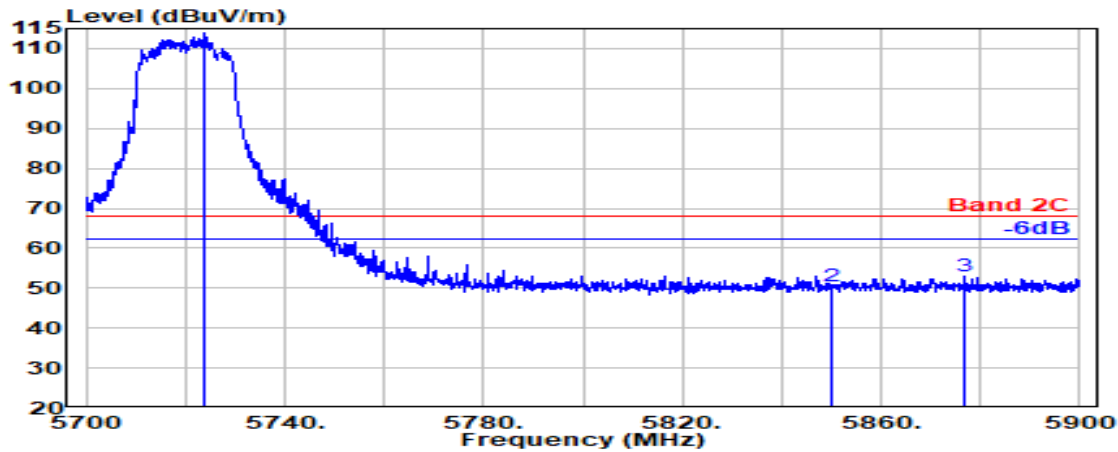


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.700	34.45	8.88	39.29	109.72	113.76	---	---	Peak
5850.000	34.70	8.95	39.31	46.31	50.65	68.20	17.55	Peak
5876.900	34.75	8.96	39.32	48.49	52.89	68.20	15.31	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

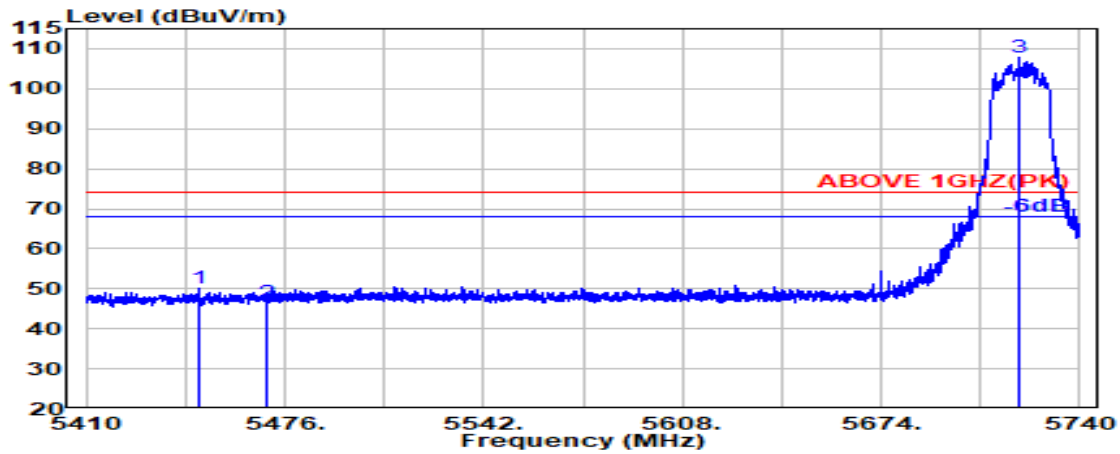

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.700	34.70	8.72	39.25	45.78	49.95	74.00	24.05	Peak
5470.000	34.78	8.74	39.25	42.36	46.63	74.00	27.37	Peak
@ 5719.600	34.44	8.88	39.29	103.73	107.76	---	---	Peak

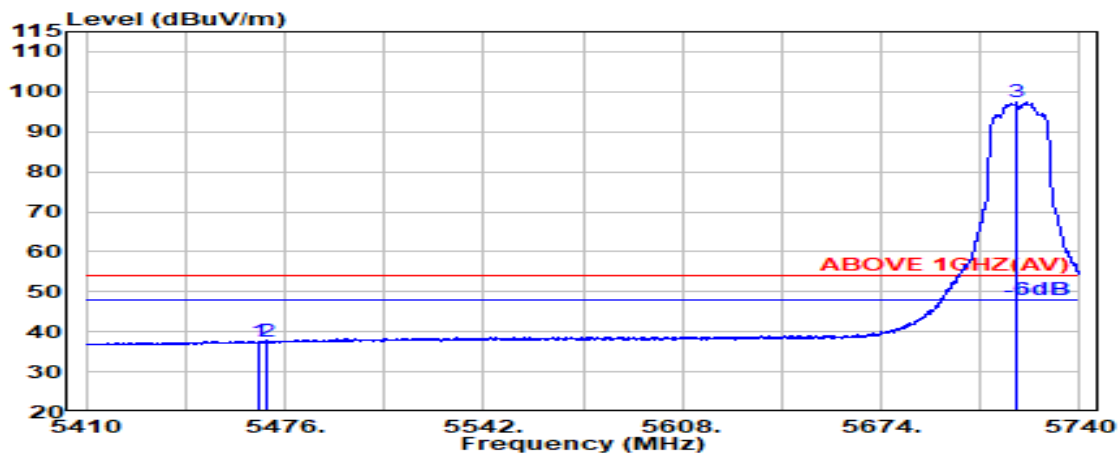


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.77	8.73	39.25	33.47	37.72	54.00	16.28	Average
5470.000	34.78	8.74	39.25	33.26	37.52	54.00	16.48	Average
@ 5718.900	34.44	8.88	39.29	93.31	97.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

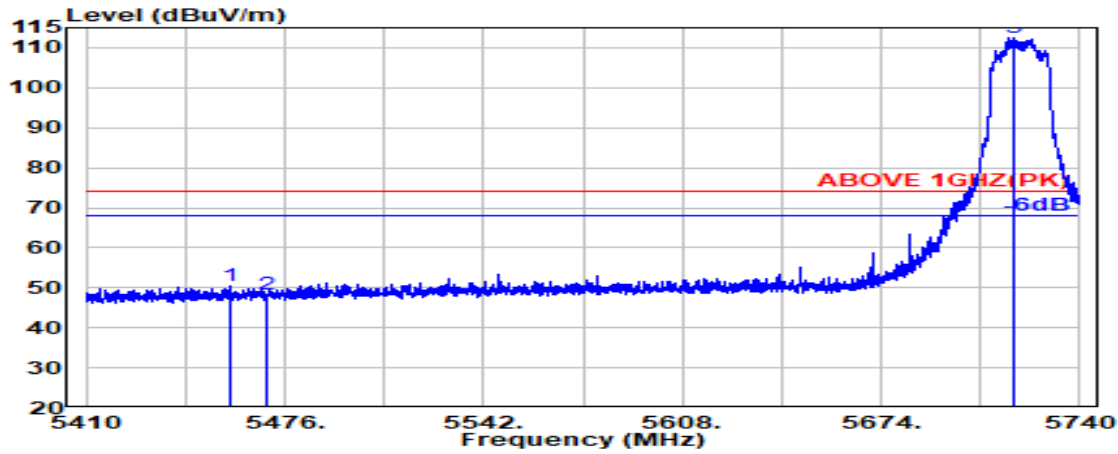

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.73	8.73	39.25	46.15	50.36	74.00	23.64	Peak
5470.000	34.78	8.74	39.25	44.09	48.36	74.00	25.64	Peak
@ 5718.300	34.44	8.88	39.29	108.53	112.56	---	---	Peak

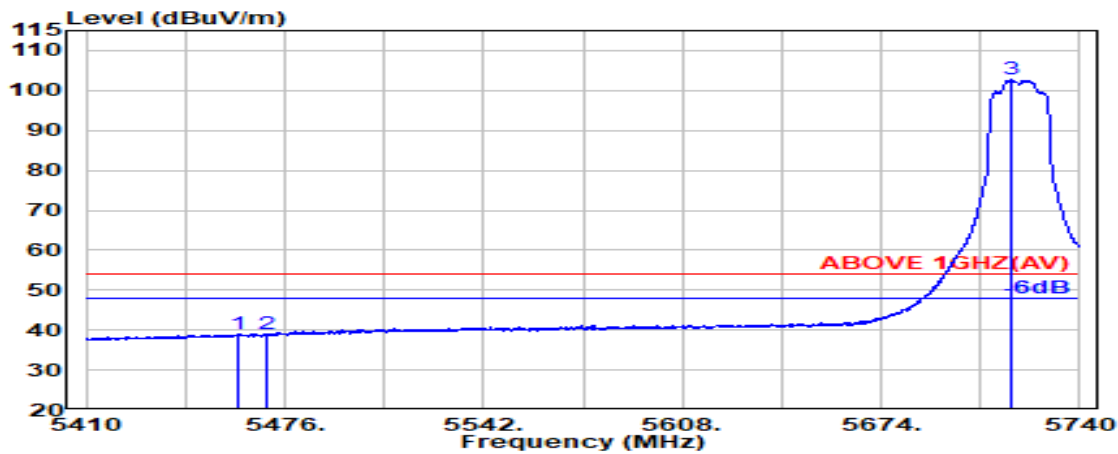


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.100	34.74	8.73	39.25	34.68	38.90	54.00	15.10	Average
5470.000	34.78	8.74	39.25	34.63	38.89	54.00	15.11	Average
@ 5717.100	34.43	8.88	39.29	98.67	102.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

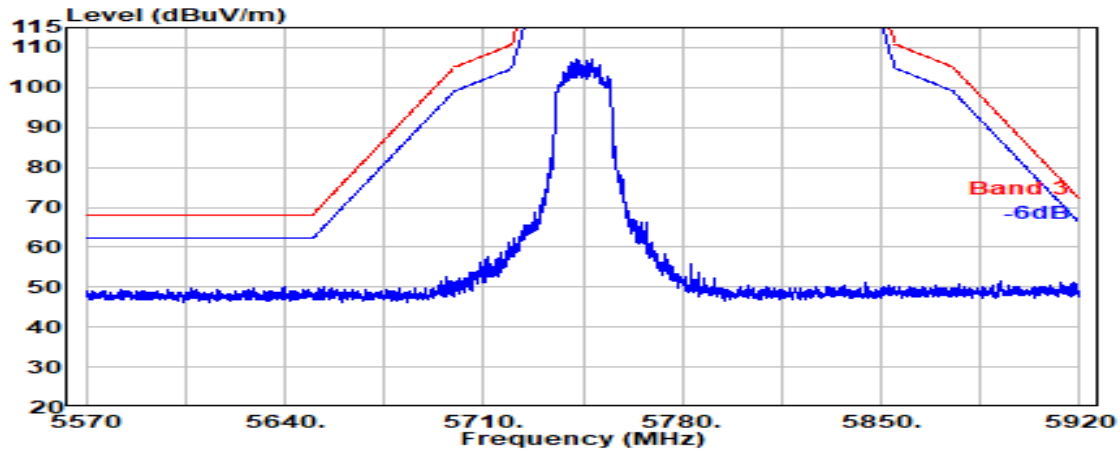


## Antenna at Vertical Polarization

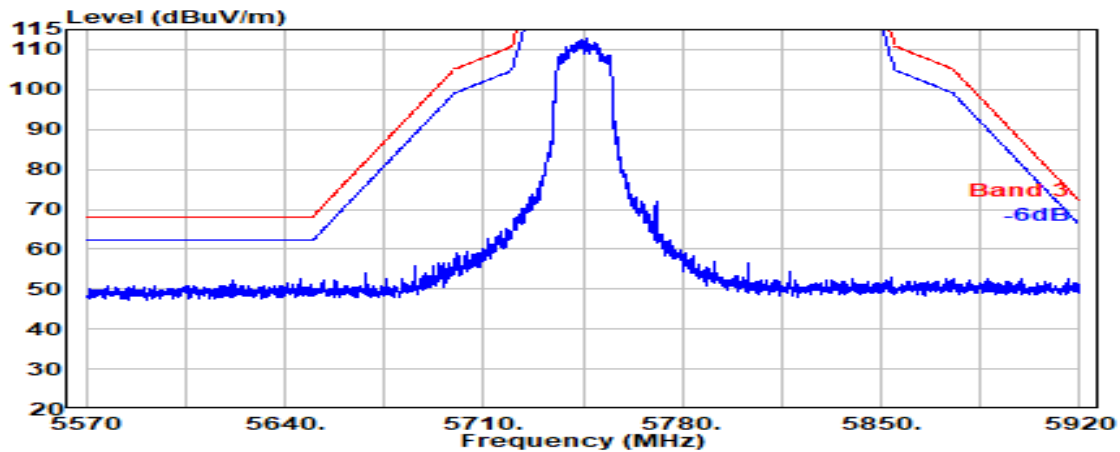


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

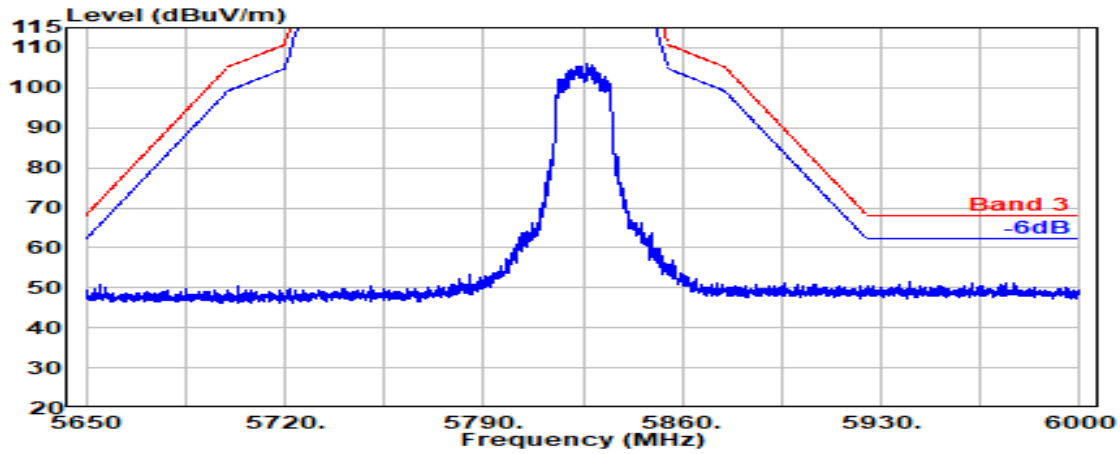

Antenna at Vertical Polarization

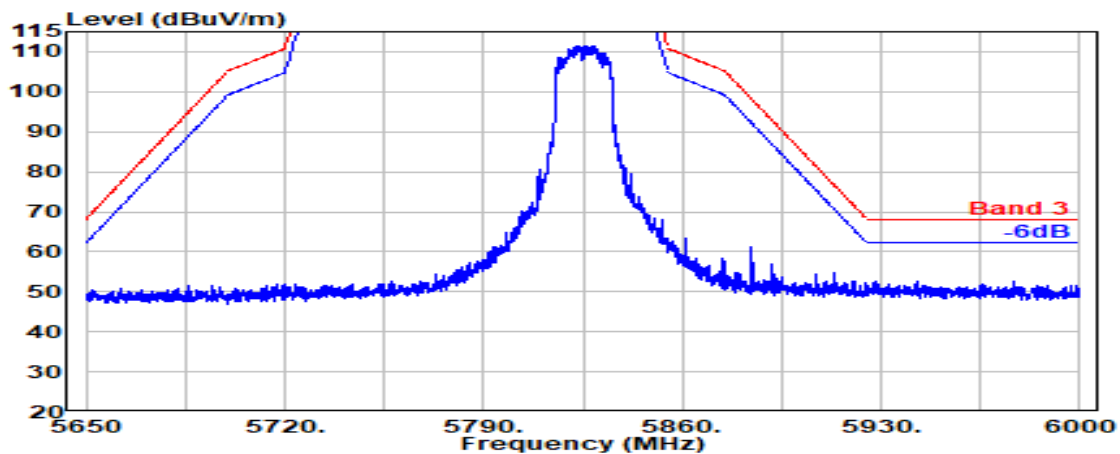


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

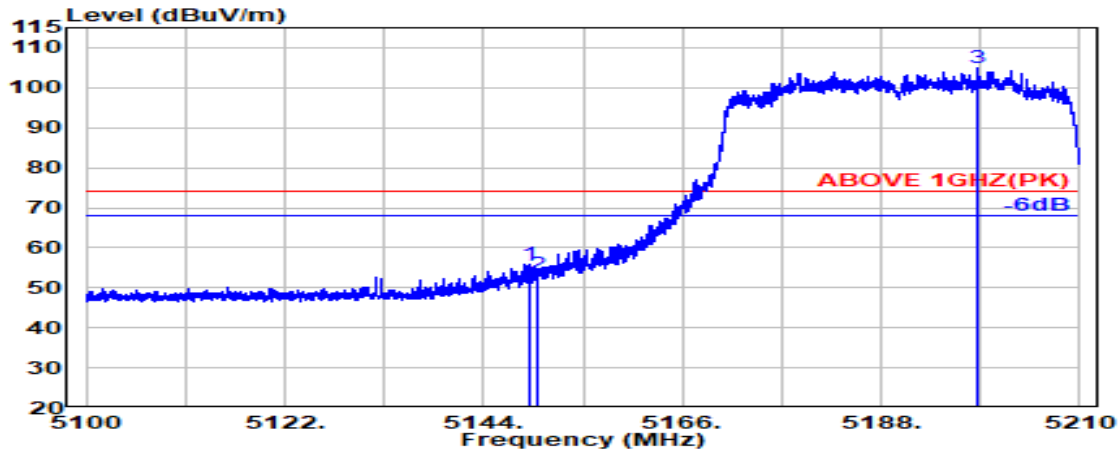

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.091	34.20	8.54	39.27	52.33	55.80	74.00	18.20	Peak
5150.000	34.20	8.54	39.27	49.80	53.27	74.00	20.73	Peak
@ 5198.749	34.30	8.57	39.27	101.27	104.87	---	---	Peak

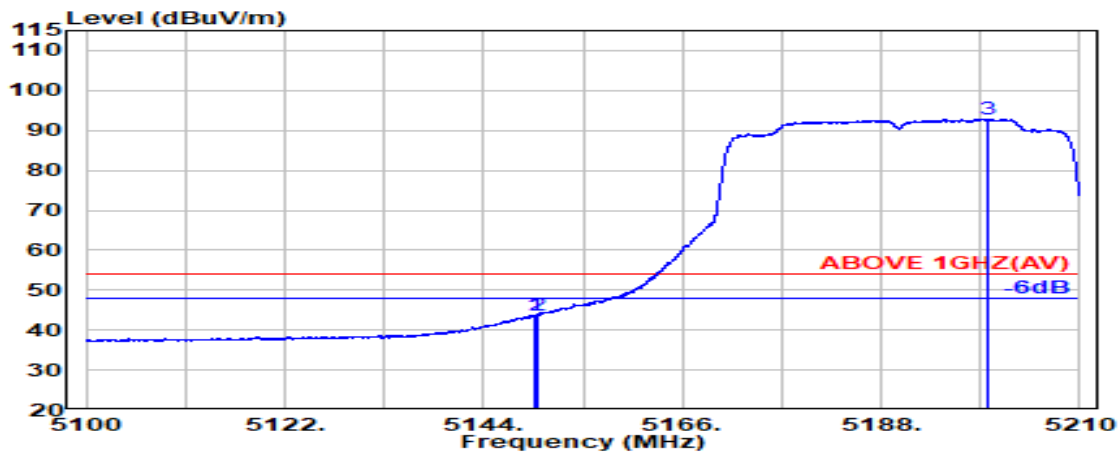


Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.563	34.20	8.54	39.27	40.09	43.56	54.00	10.44	Average
5150.000	34.20	8.54	39.27	40.29	43.76	54.00	10.24	Average
@ 5199.912	34.30	8.57	39.27	89.23	92.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

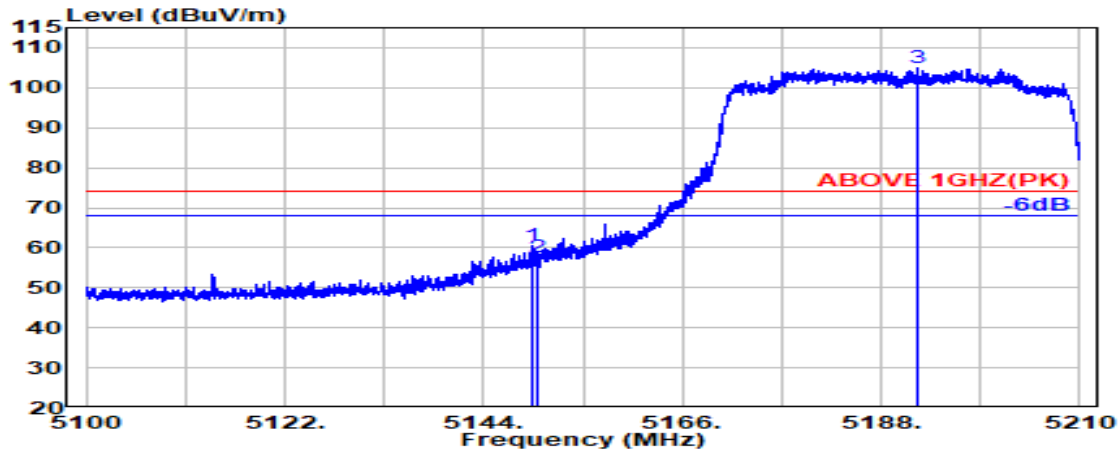
**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.54	39.27	56.89	60.36	74.00	13.64	Peak
5150.000	34.20	8.54	39.27	54.09	57.57	74.00	16.43	Peak
@ 5192.086	34.28	8.57	39.27	101.37	104.95	---	---	Peak

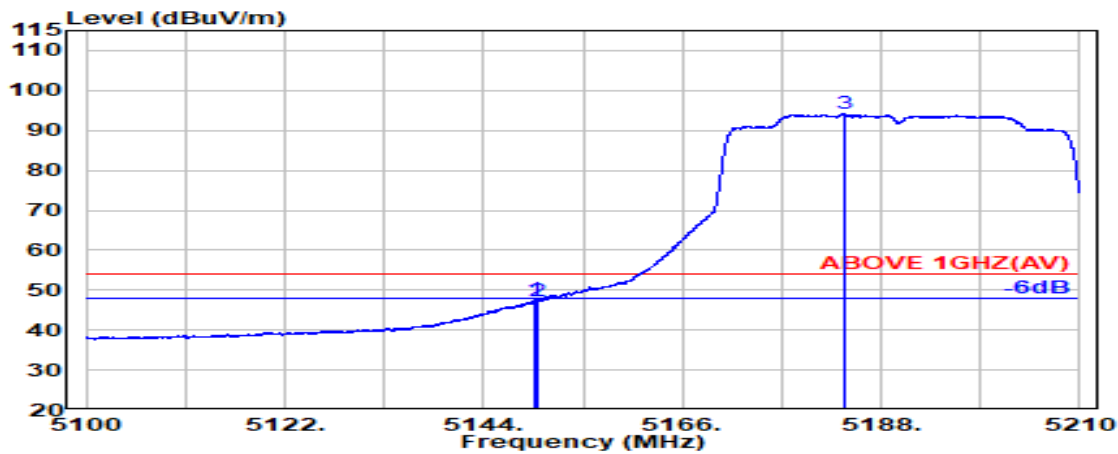
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.657	34.20	8.54	39.27	44.28	47.75	54.00	6.25	Average
5150.000	34.20	8.54	39.27	43.85	47.33	54.00	6.67	Average
@ 5183.852	34.27	8.56	39.27	90.53	94.09	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

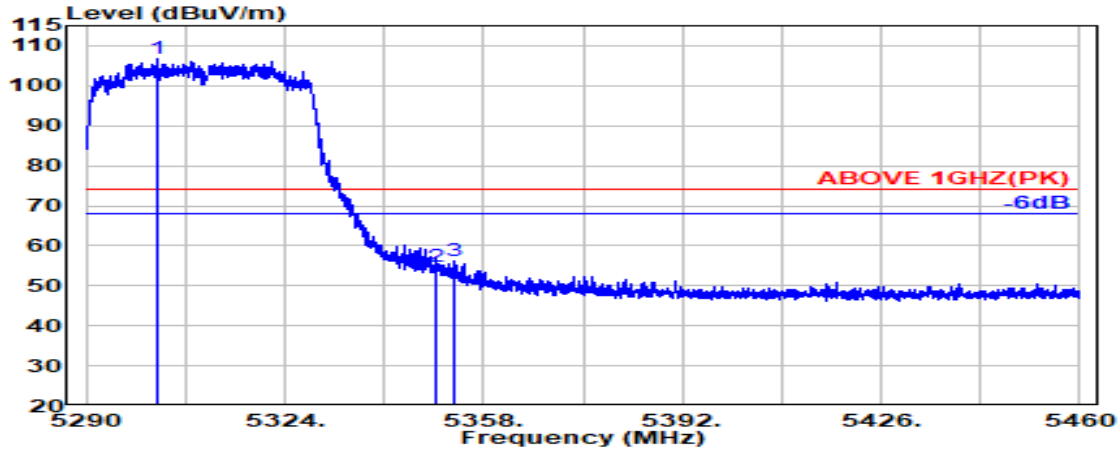

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.337	34.60	8.64	39.26	102.68	106.65	---	---	Peak
5350.000	34.50	8.67	39.26	50.83	54.74	74.00	19.26	Peak
5353.094	34.51	8.67	39.26	52.42	56.34	74.00	17.66	Peak

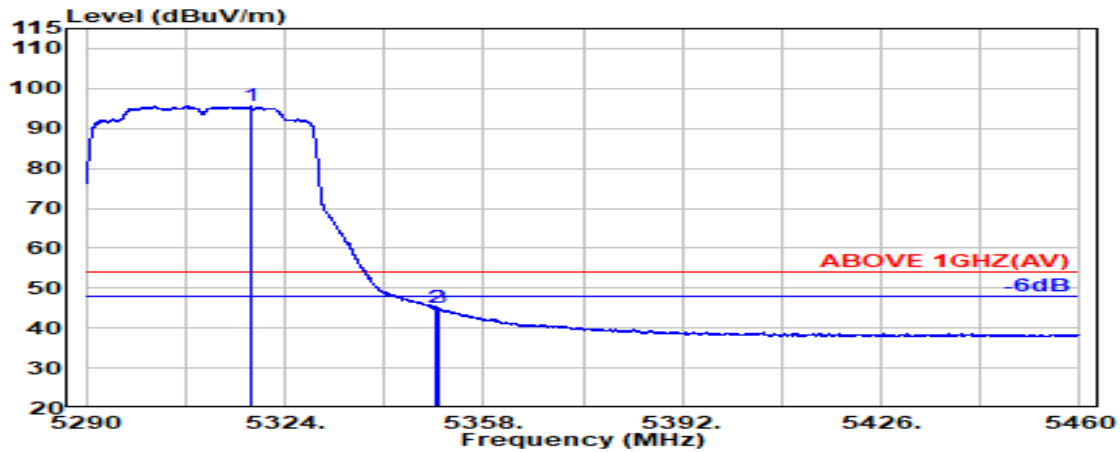


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.269	34.56	8.65	39.26	91.78	95.72	---	---	Average
5350.000	34.50	8.67	39.26	41.24	45.14	54.00	8.86	Average
5350.423	34.50	8.67	39.26	41.07	44.98	54.00	9.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

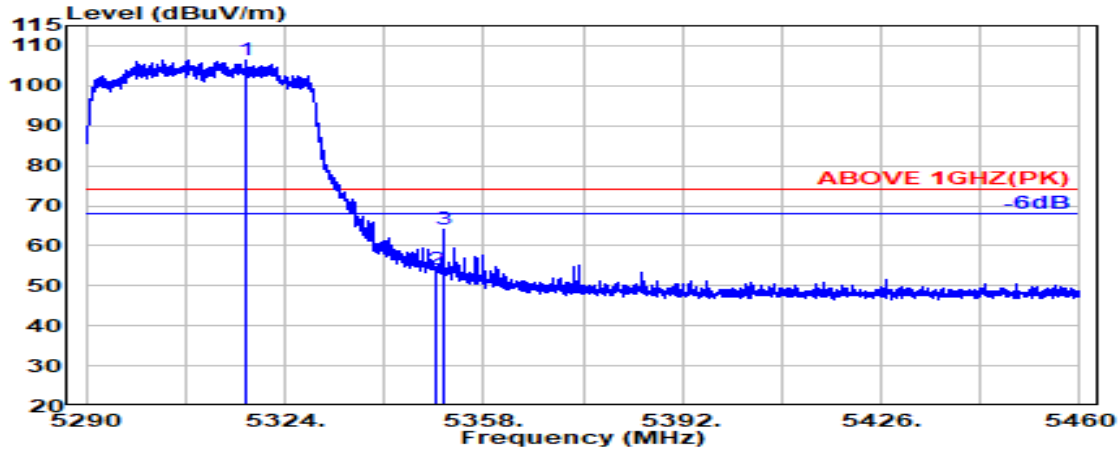

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.297	34.57	8.65	39.26	102.56	106.51	---	---	Peak
5350.000	34.50	8.67	39.26	50.23	54.14	74.00	19.86	Peak
5351.006	34.50	8.67	39.26	60.11	64.02	74.00	9.98	Peak

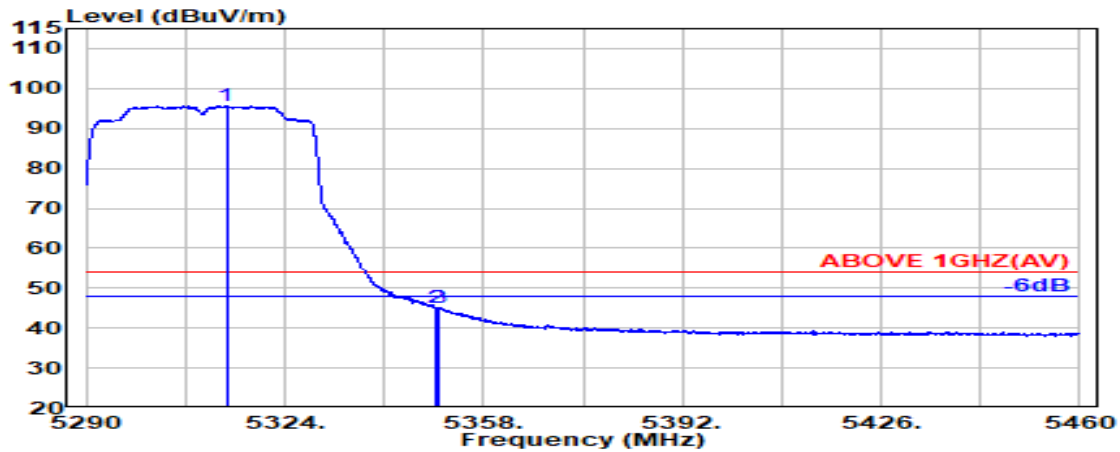


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.994	34.57	8.64	39.26	91.72	95.67	---	---	Average
5350.000	34.50	8.67	39.26	41.13	45.04	54.00	8.96	Average
5350.326	34.50	8.67	39.26	41.07	44.98	54.00	9.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

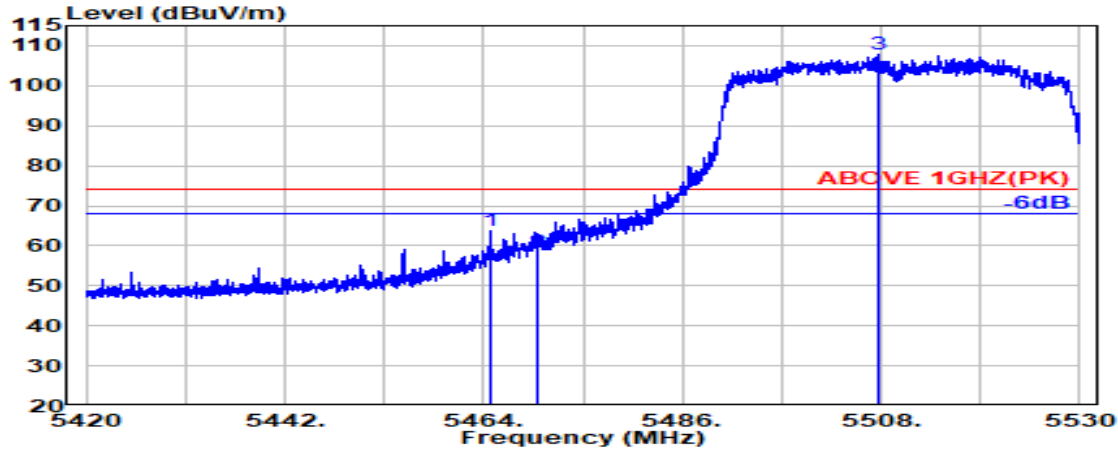

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.849	34.76	8.73	39.25	59.36	63.60	74.00	10.40	Peak
5470.000	34.78	8.74	39.25	53.92	58.19	74.00	15.81	Peak
@ 5507.812	34.88	8.76	39.25	103.50	107.89	---	---	Peak

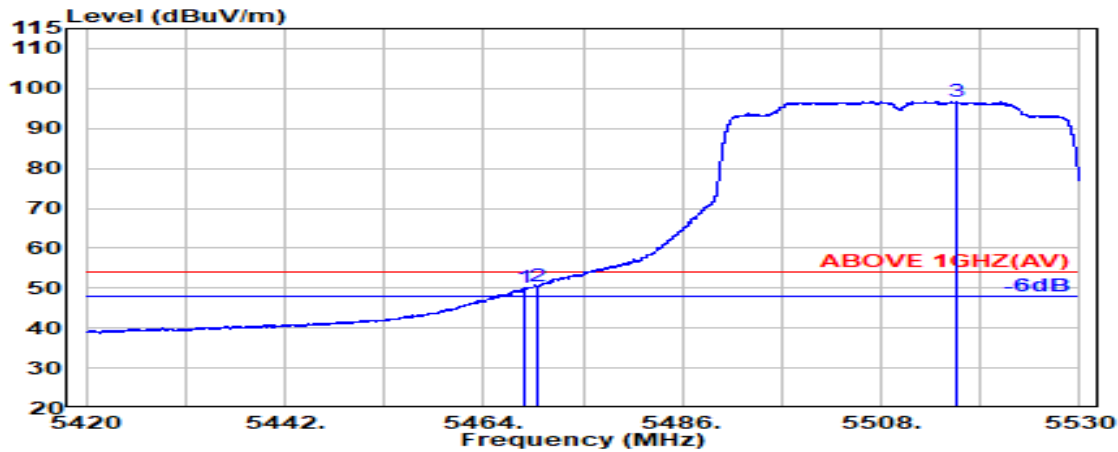


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.557	34.77	8.73	39.25	45.88	50.13	54.00	3.87	Average
5470.000	34.78	8.74	39.25	46.31	50.58	54.00	3.42	Average
@ 5516.329	34.87	8.76	39.25	92.38	96.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

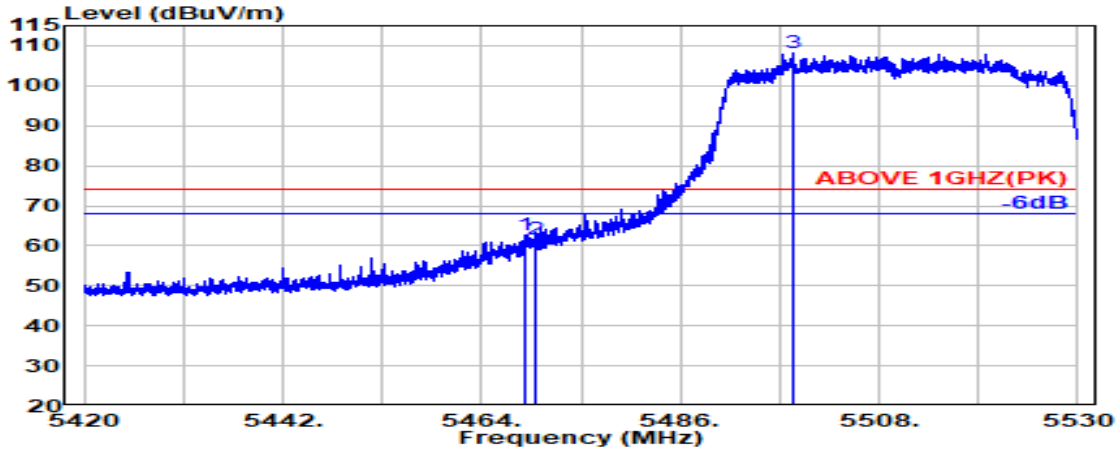

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.714	34.78	8.74	39.25	58.27	62.53	74.00	11.47	Peak
5470.000	34.78	8.74	39.25	57.26	61.53	74.00	12.47	Peak
@ 5498.446	34.89	8.75	39.25	103.89	108.29	---	---	Peak

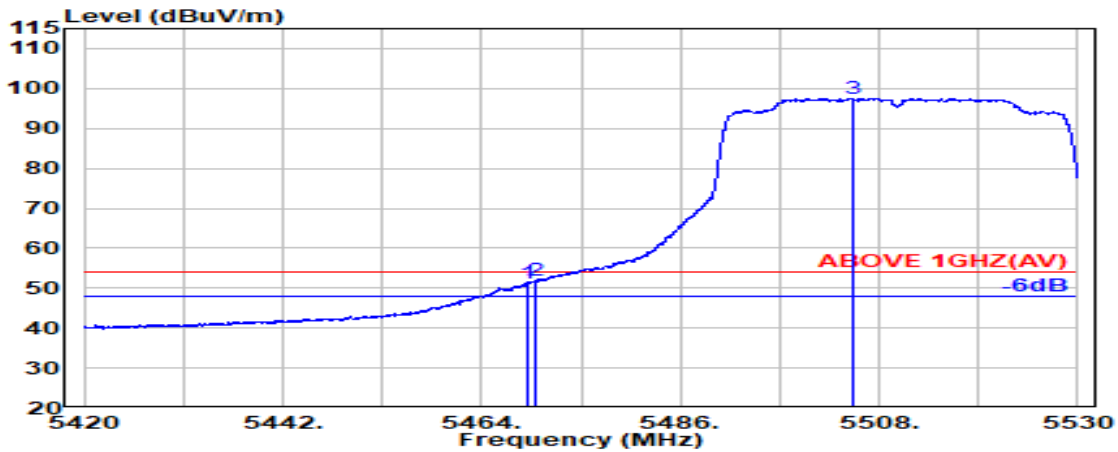


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.966	34.78	8.74	39.25	46.77	51.03	54.00	2.97	Average
5470.000	34.78	8.74	39.25	47.66	51.92	54.00	2.08	Average
@ 5505.046	34.89	8.76	39.25	93.18	97.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

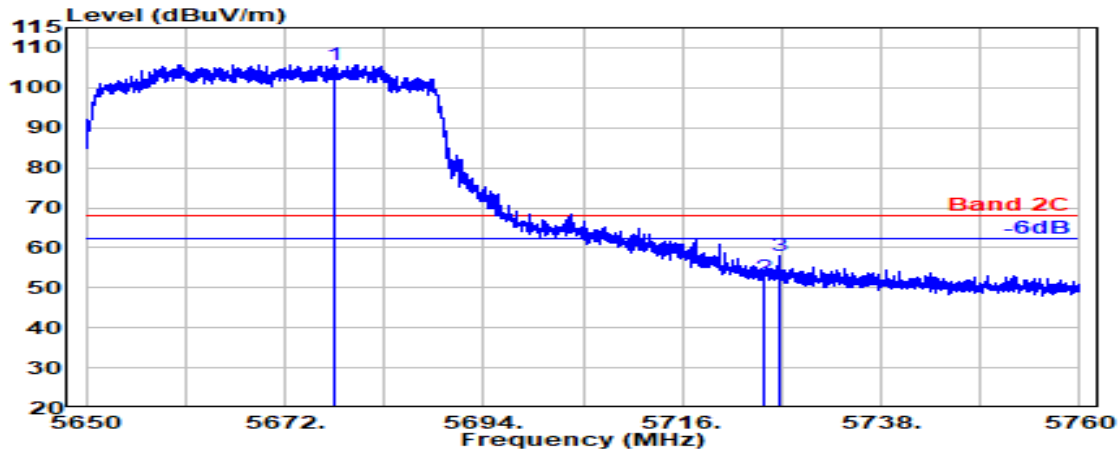

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.500	34.49	8.85	39.28	101.79	105.85	---	---	Peak
5725.000	34.45	8.88	39.29	48.42	52.46	68.20	15.74	Peak
5726.780	34.45	8.88	39.29	53.99	58.03	68.20	10.17	Peak

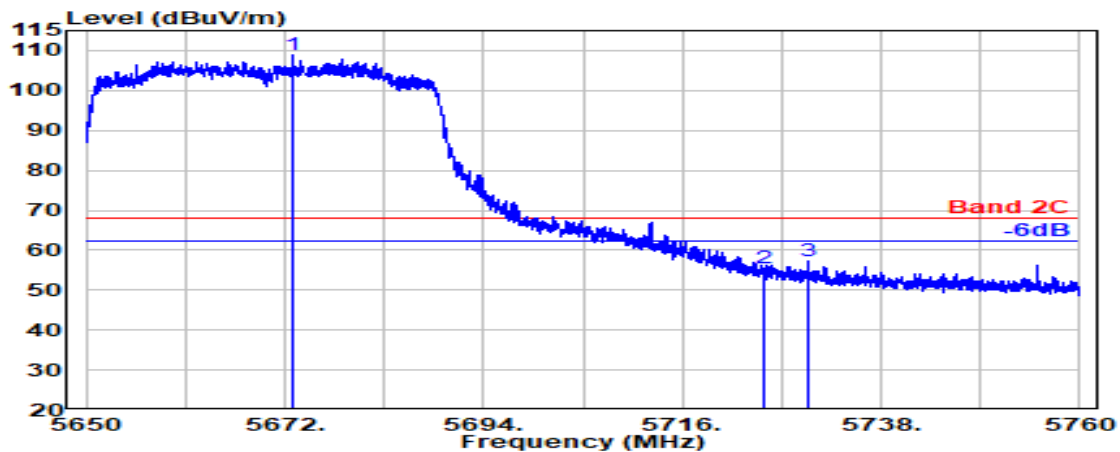


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.849	34.51	8.85	39.28	104.72	108.80	---	---	Peak
5725.000	34.45	8.88	39.29	51.56	55.60	68.20	12.60	Peak
5729.829	34.46	8.88	39.29	53.28	57.34	68.20	10.86	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

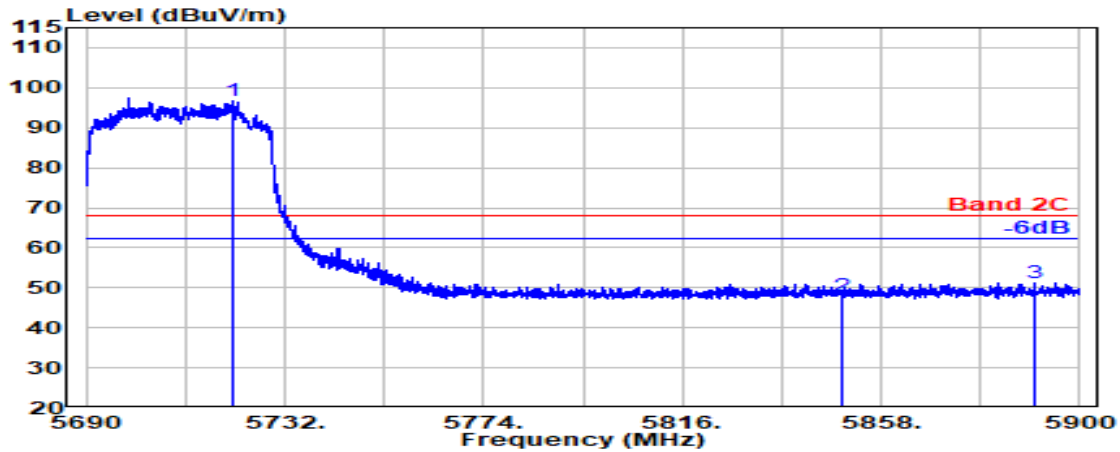

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.840	34.44	8.88	39.29	92.66	96.69	---	---	Peak
5850.000	34.70	8.95	39.31	43.61	47.94	68.20	20.26	Peak
5890.580	34.78	8.97	39.32	46.92	51.35	68.20	16.85	Peak

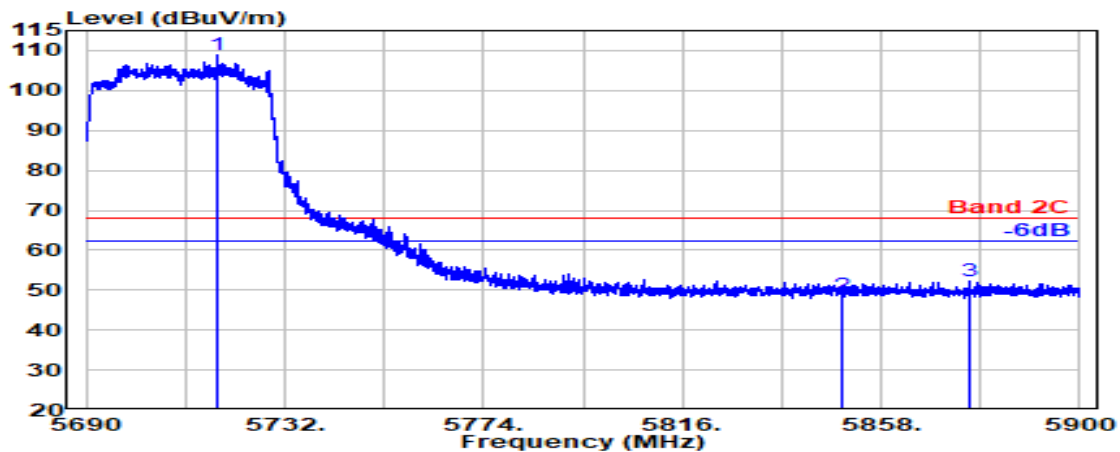


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.780	34.44	8.88	39.29	105.00	109.03	---	---	Peak
5850.000	34.70	8.95	39.31	44.35	48.68	68.20	19.52	Peak
5876.600	34.75	8.96	39.32	47.82	52.21	68.20	15.99	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

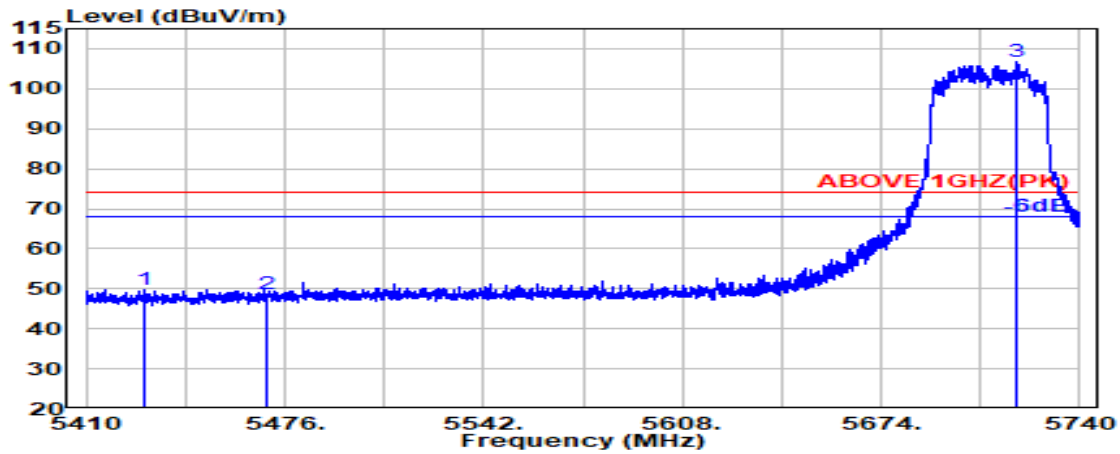

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.611	34.66	8.71	39.25	45.82	49.93	74.00	24.07	Peak
5470.000	34.78	8.74	39.25	44.29	48.55	74.00	25.45	Peak
@ 5718.786	34.44	8.88	39.29	102.76	106.78	---	---	Peak

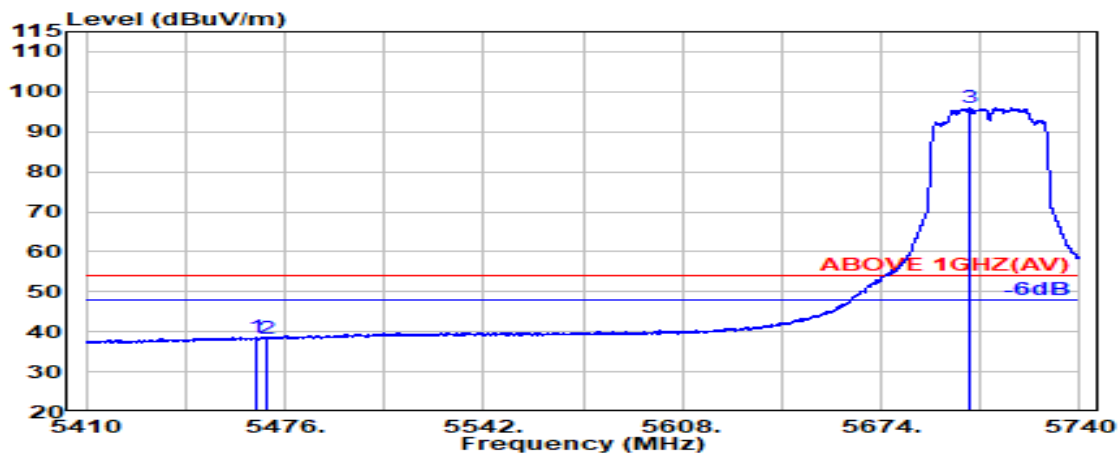


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.383	34.77	8.73	39.25	34.33	38.58	54.00	15.42	Peak
5470.000	34.78	8.74	39.25	34.18	38.44	54.00	15.56	Peak
@ 5703.700	34.41	8.87	39.29	91.91	95.90	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

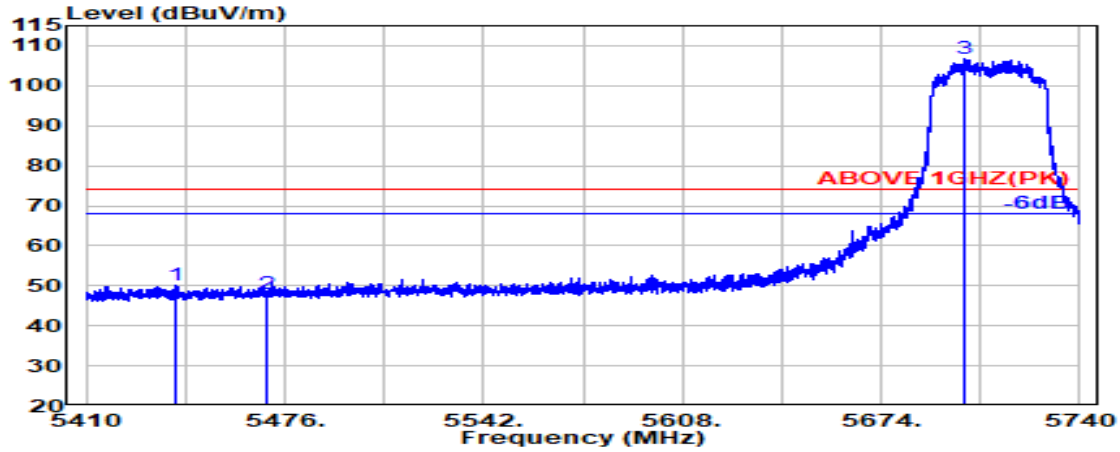

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.889	34.68	8.72	39.25	45.99	50.14	74.00	23.86	Peak
5470.000	34.78	8.74	39.25	43.63	47.89	74.00	26.11	Peak
@ 5701.531	34.40	8.87	39.29	102.79	106.77	---	---	Peak

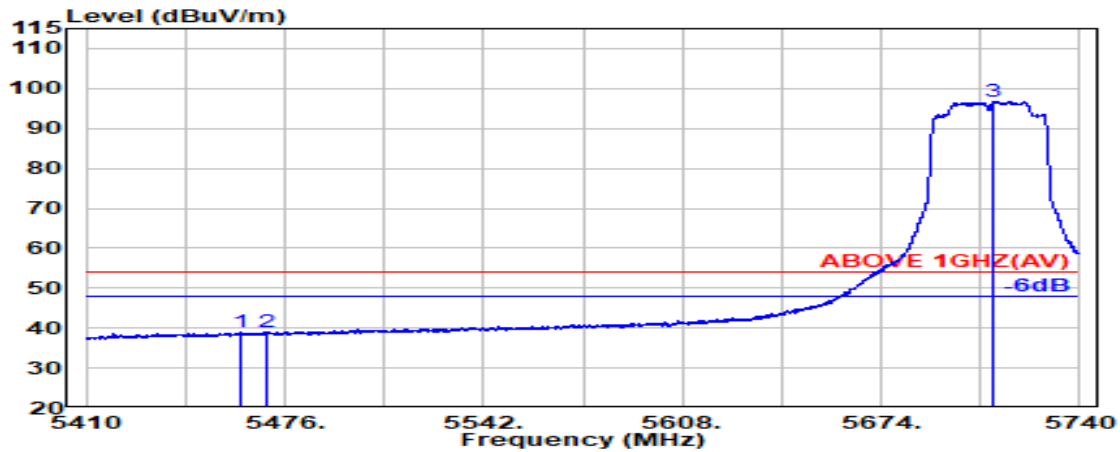


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.668	34.75	8.73	39.25	34.77	38.99	54.00	15.01	Peak
5470.000	34.78	8.74	39.25	34.81	39.07	54.00	14.93	Peak
@ 5711.243	34.42	8.87	39.29	92.65	96.66	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

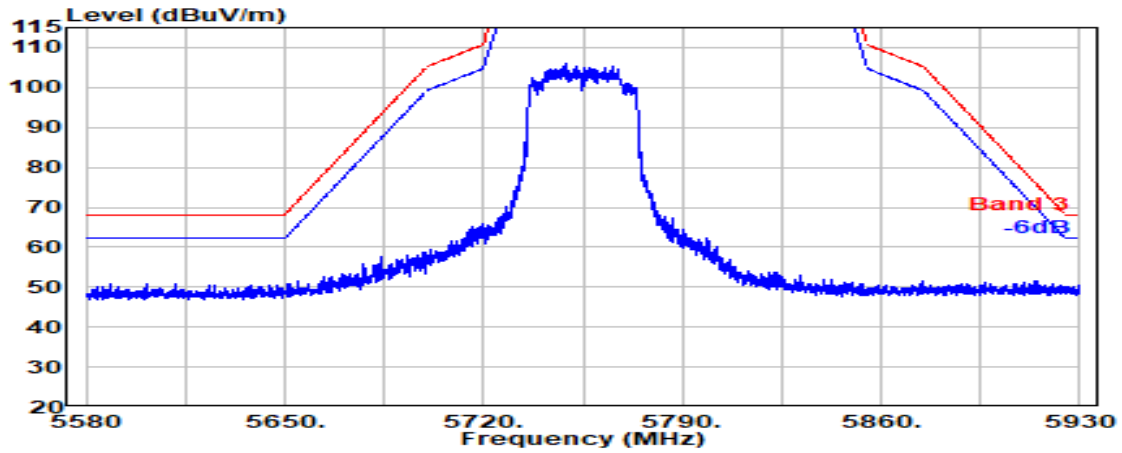


Antenna at Vertical Polarization

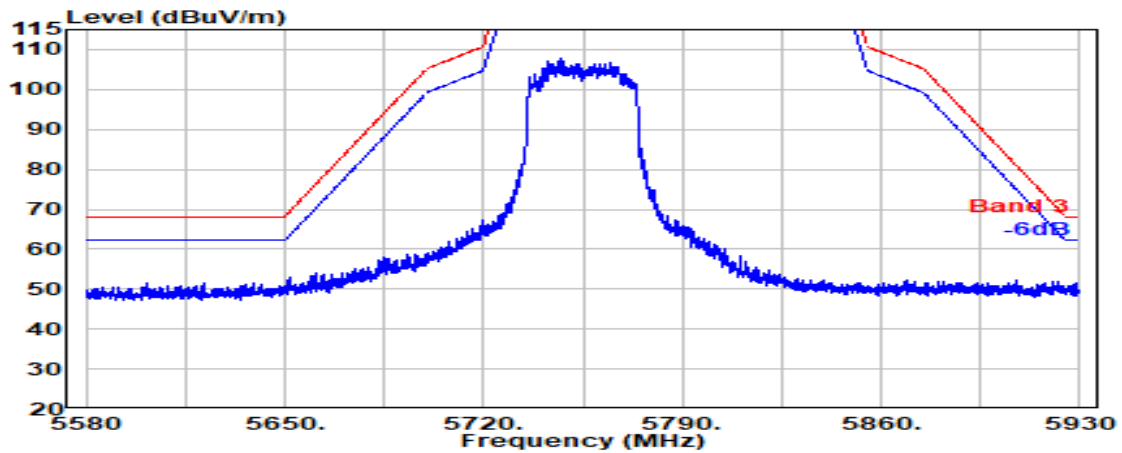


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

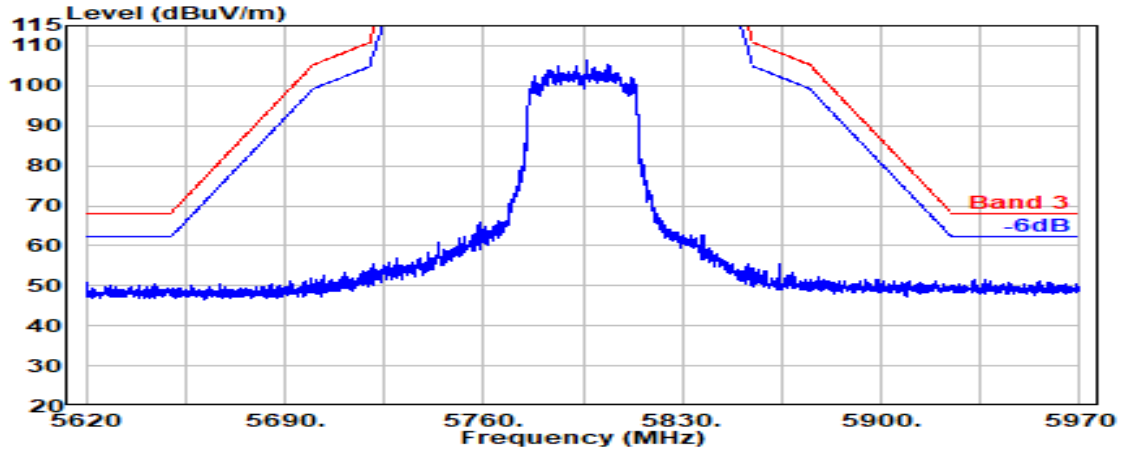

Antenna at Vertical Polarization

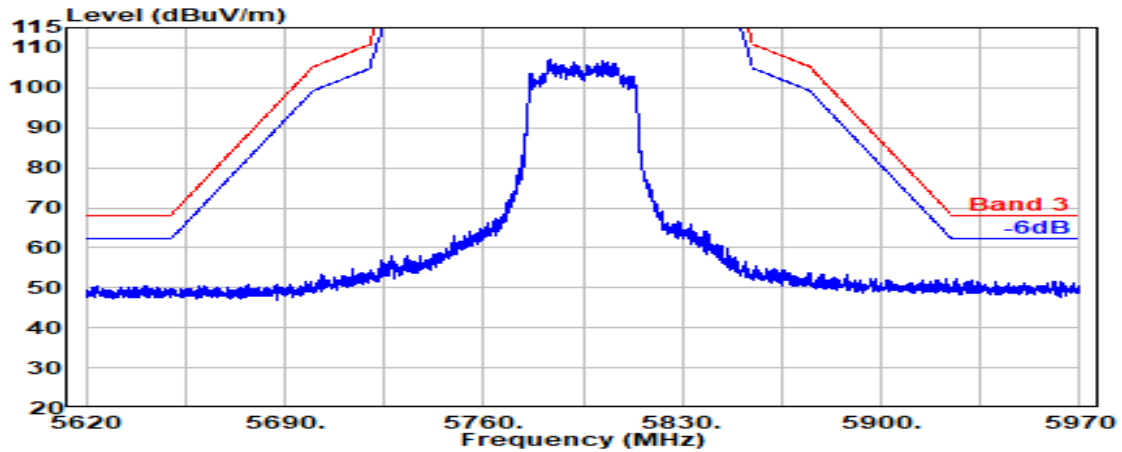


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

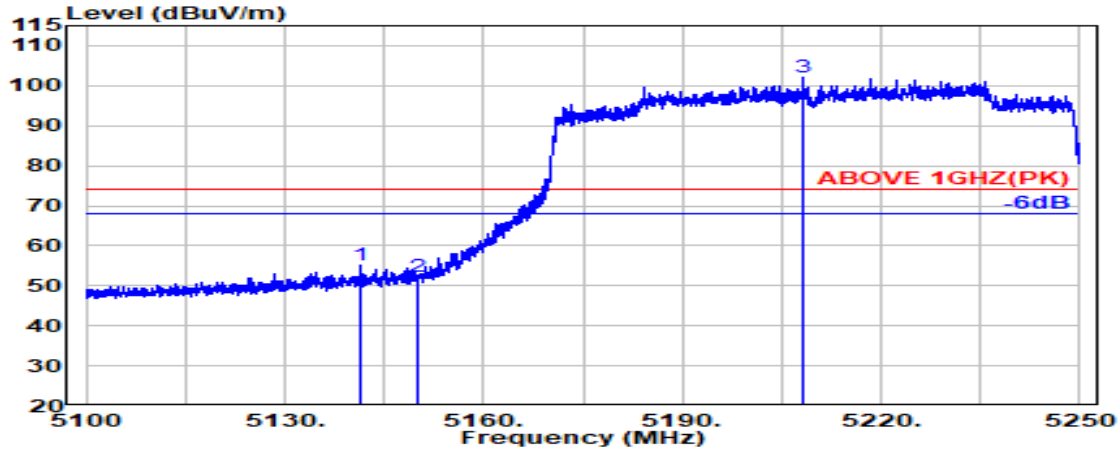

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.486	34.17	8.54	39.27	51.61	55.04	74.00	18.96	Peak
5150.000	34.20	8.54	39.27	48.91	52.38	74.00	21.62	Peak
@ 5208.086	34.32	8.58	39.27	98.41	102.04	---	---	Peak

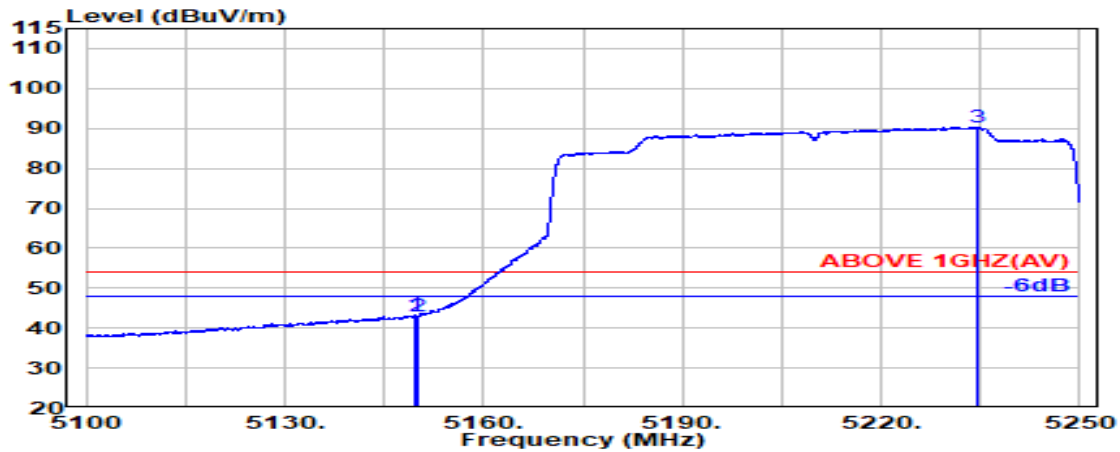


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.714	34.20	8.54	39.27	39.80	43.27	54.00	10.73	Average
5150.000	34.20	8.54	39.27	39.36	42.83	54.00	11.17	Average
@ 5234.700	34.37	8.60	39.27	86.70	90.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

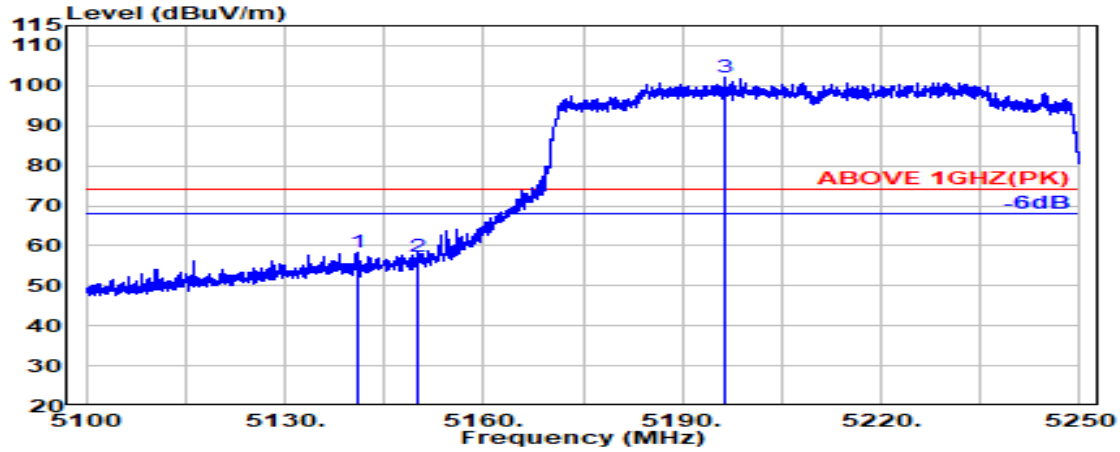

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.843	34.16	8.54	39.27	54.84	58.27	74.00	15.73	Peak
5150.000	34.20	8.54	39.27	53.72	57.19	74.00	16.81	Peak
@ 5196.471	34.29	8.57	39.27	98.35	101.95	---	---	Peak

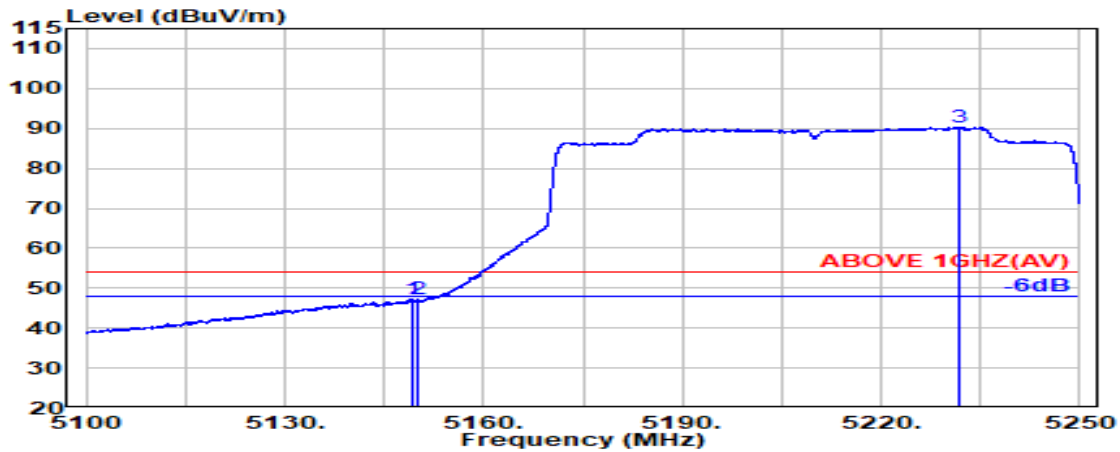


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.114	34.20	8.54	39.27	43.74	47.21	54.00	6.79	Average
5150.000	34.20	8.54	39.27	43.78	47.25	54.00	6.75	Average
@ 5231.614	34.36	8.59	39.27	86.59	90.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

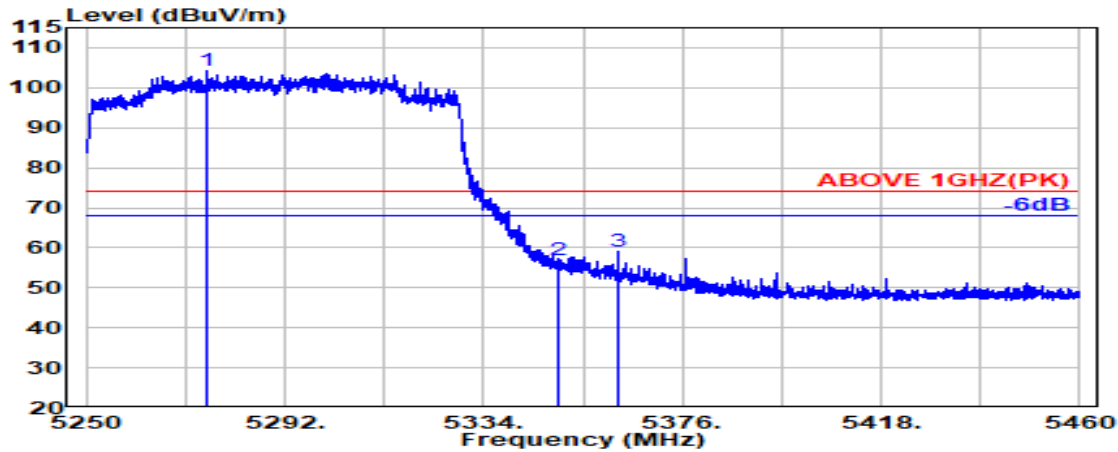

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.380	34.50	8.62	39.26	100.26	104.12	---	---	Peak
5350.000	34.50	8.67	39.26	52.91	56.82	74.00	17.18	Peak
5362.380	34.52	8.67	39.26	55.08	59.02	74.00	14.98	Peak

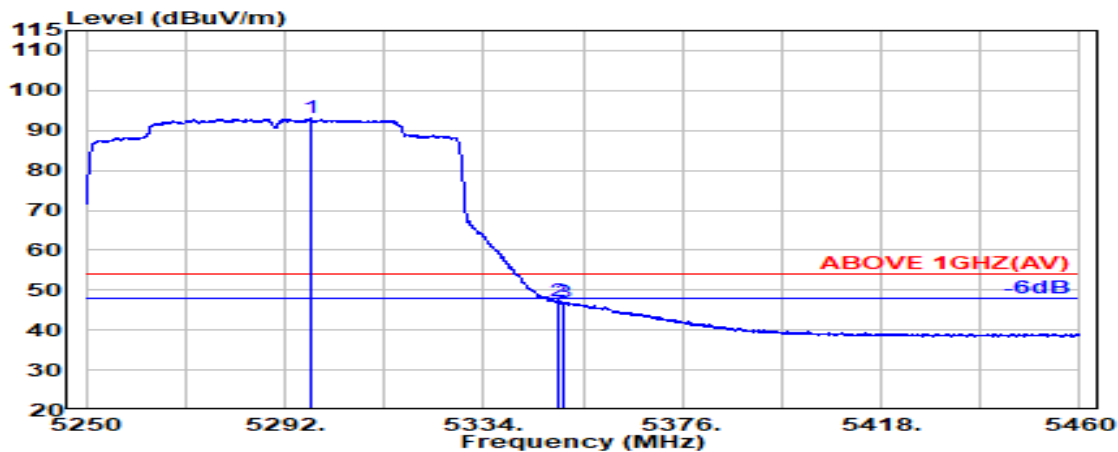


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.340	34.59	8.63	39.26	89.03	92.99	---	---	Average
5350.000	34.50	8.67	39.26	43.40	47.31	54.00	6.69	Average
5351.040	34.50	8.67	39.26	43.02	46.93	54.00	7.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

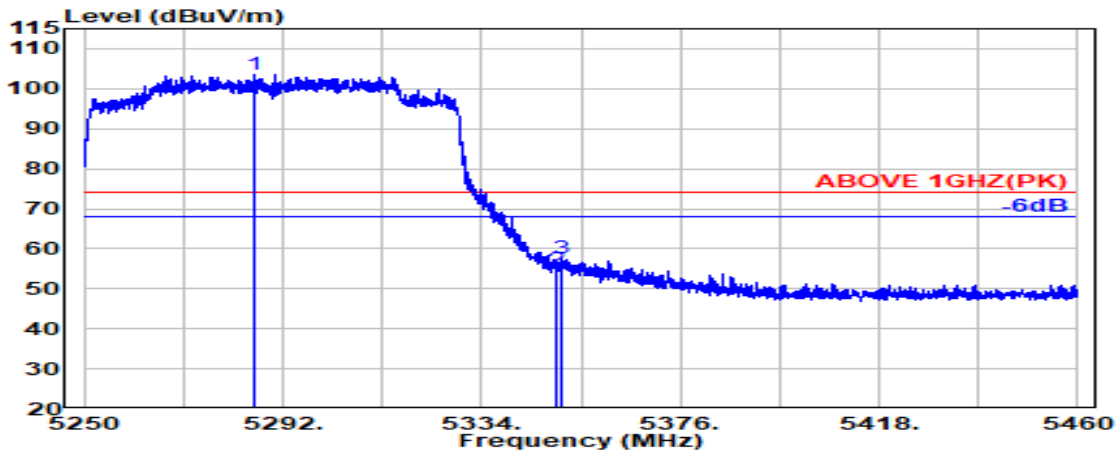

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5285.940	34.54	8.63	39.26	99.46	103.36	---	---	Peak
5350.000	34.50	8.67	39.26	50.99	54.89	74.00	19.11	Peak
5350.680	34.50	8.67	39.26	53.60	57.51	74.00	16.49	Peak

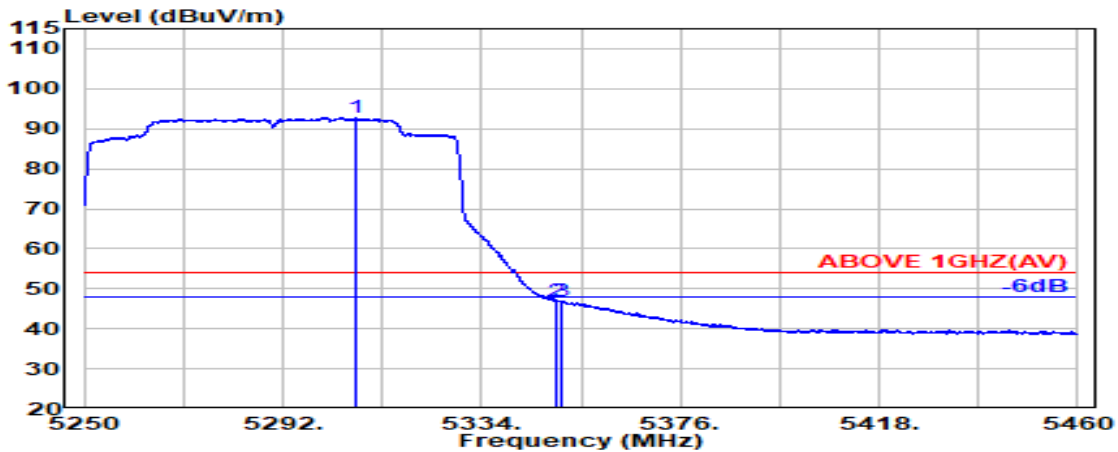


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.660	34.58	8.64	39.26	88.77	92.74	---	---	Average
5350.000	34.50	8.67	39.26	42.97	46.88	54.00	7.12	Average
5350.740	34.50	8.67	39.26	43.03	46.93	54.00	7.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

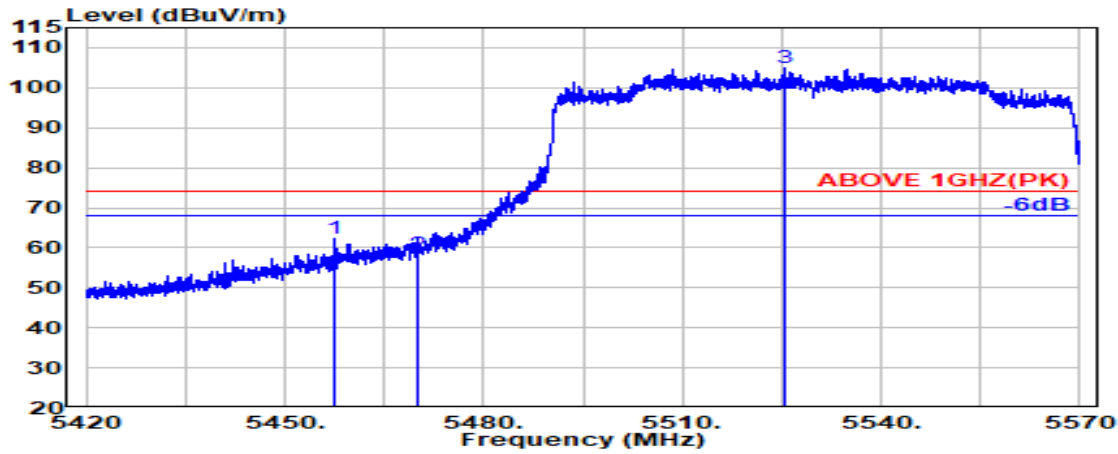

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.628	34.73	8.73	39.25	57.99	62.20	74.00	11.80	Peak
5470.000	34.78	8.74	39.25	54.19	58.46	74.00	15.54	Peak
@ 5525.600	34.85	8.77	39.25	100.62	104.98	---	---	Peak

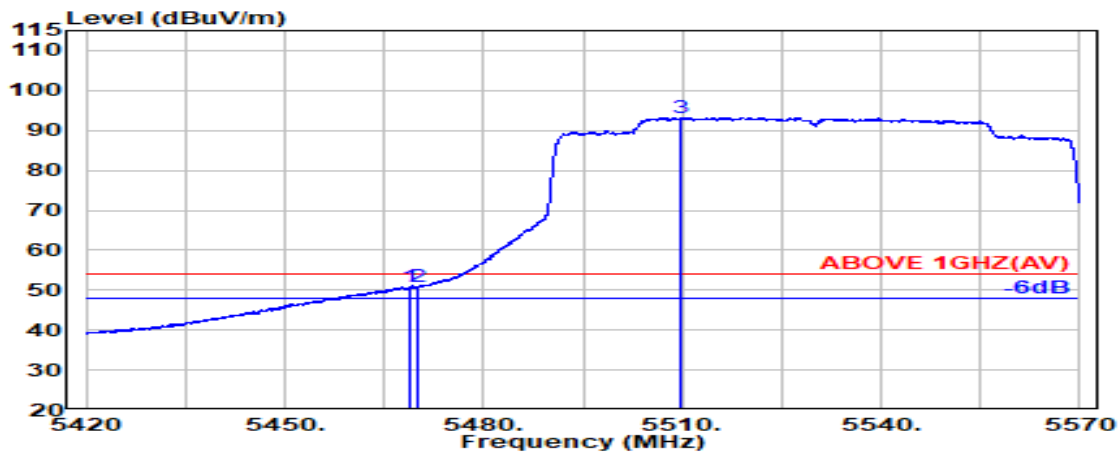


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.986	34.78	8.74	39.25	46.56	50.82	54.00	3.18	Average
5470.000	34.78	8.74	39.25	46.59	50.85	54.00	3.15	Average
@ 5509.914	34.88	8.76	39.25	88.84	93.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

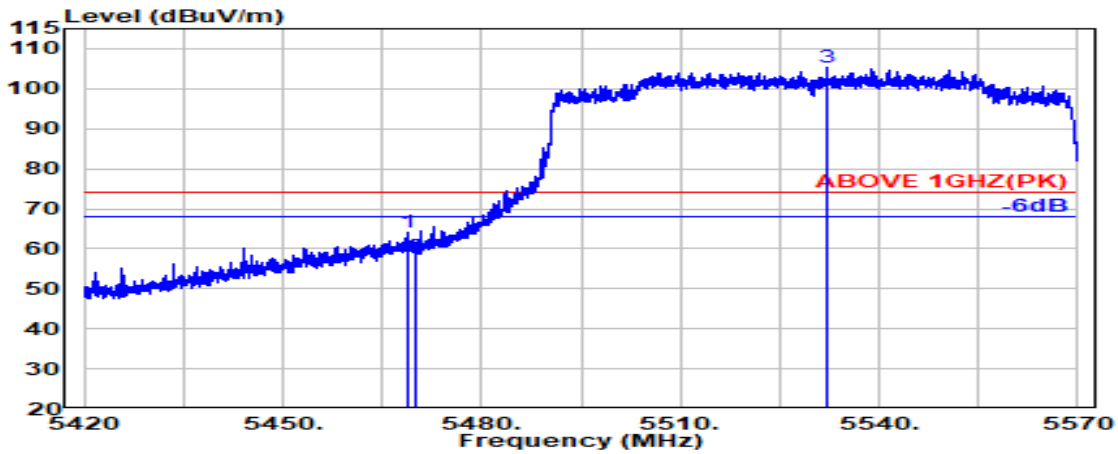

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.857	34.78	8.74	39.25	59.87	64.13	74.00	9.87	Peak
5470.000	34.78	8.74	39.25	53.71	57.97	74.00	16.03	Peak
@ 5532.114	34.84	8.77	39.26	100.87	105.22	---	---	Peak

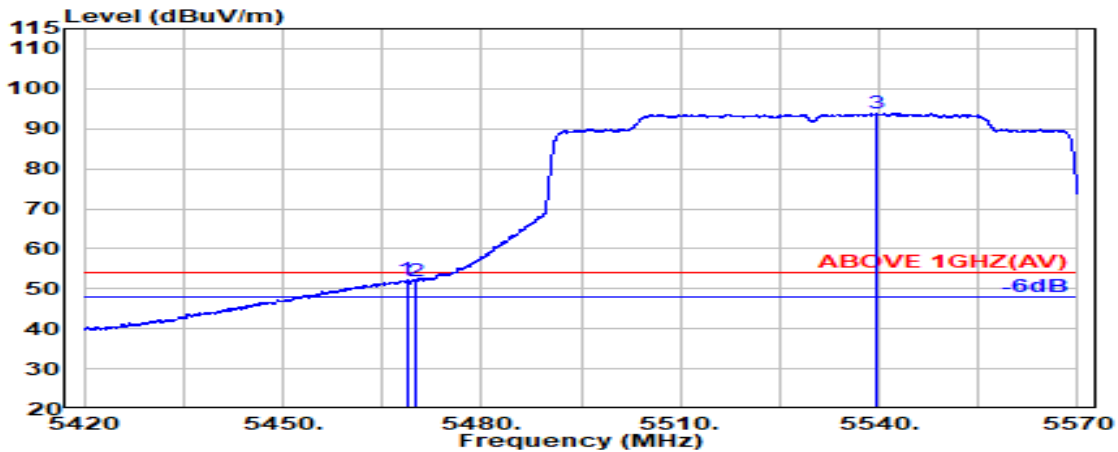


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.686	34.77	8.74	39.25	47.85	52.11	54.00	1.89	Average
5470.000	34.78	8.74	39.25	47.57	51.84	54.00	2.16	Average
@ 5539.571	34.82	8.78	39.26	89.68	94.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

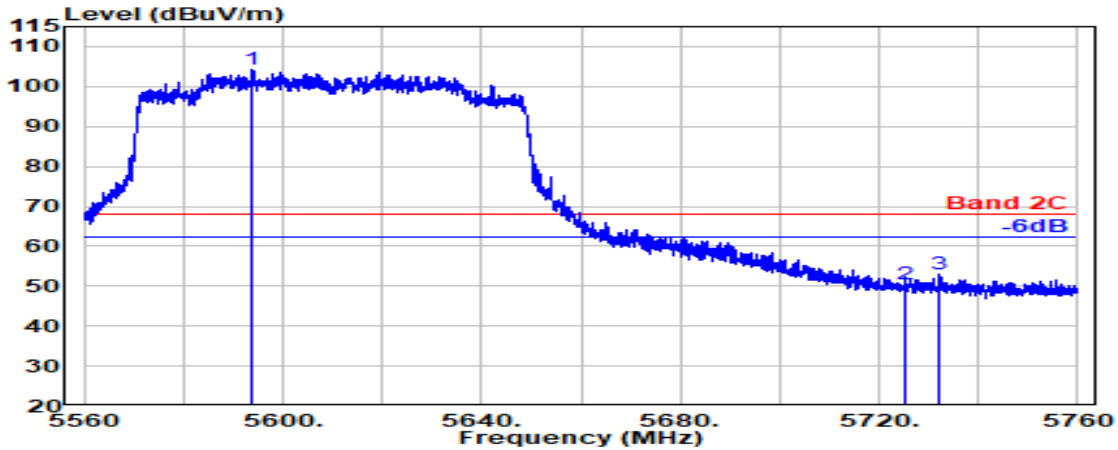

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.943	34.71	8.81	39.27	100.10	104.35	---	---	Peak
5725.000	34.45	8.88	39.29	46.58	50.62	68.20	17.58	Peak
5732.286	34.46	8.88	39.29	49.09	53.15	68.20	15.05	Peak

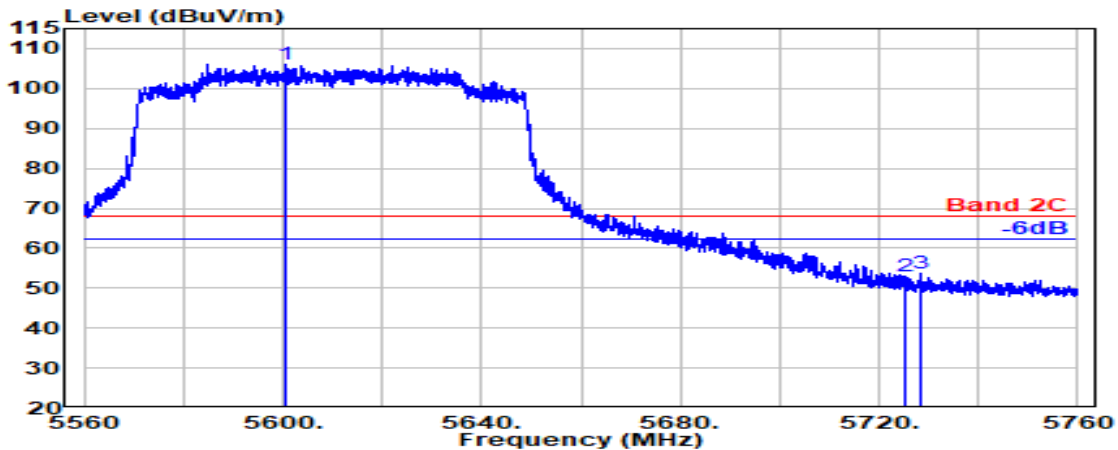


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5600.628	34.70	8.81	39.27	101.85	106.09	---	---	Peak
5725.000	34.45	8.88	39.29	48.96	53.00	68.20	15.20	Peak
5728.286	34.46	8.88	39.29	49.80	53.85	68.20	14.35	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

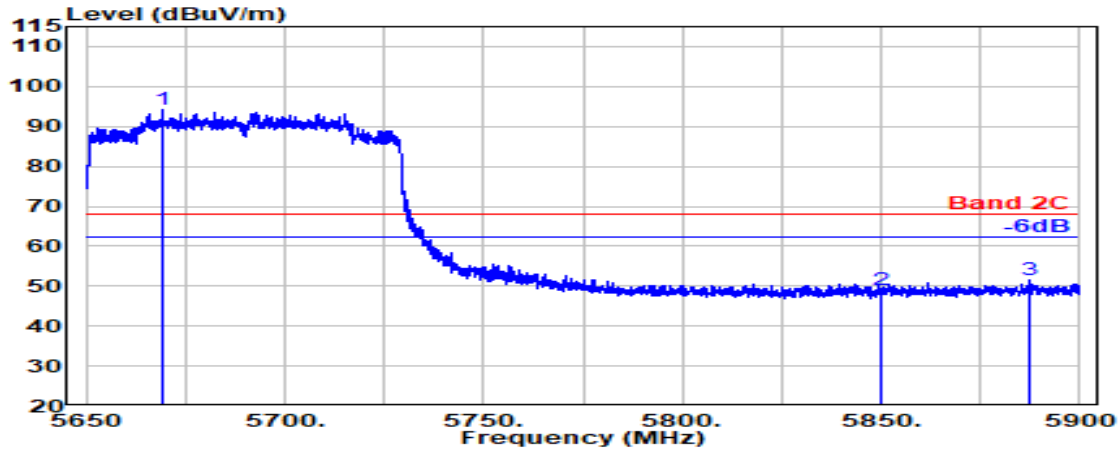

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5669.071	34.52	8.85	39.28	90.19	94.29	---	---	Peak
5850.000	34.70	8.95	39.31	44.86	49.20	68.20	19.00	Peak
5887.214	34.77	8.97	39.32	46.96	51.38	68.20	16.82	Peak

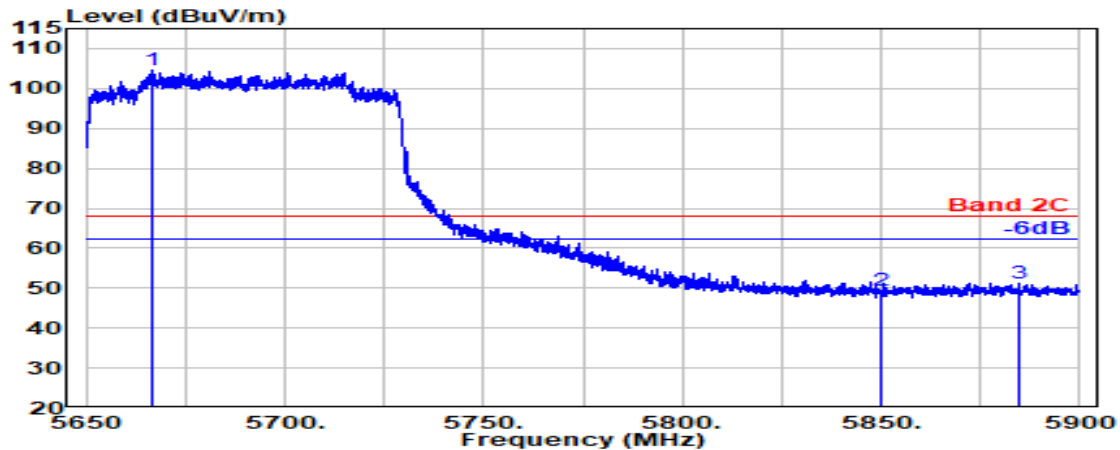


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5666.714	34.53	8.85	39.28	100.44	104.54	---	---	Peak
5850.000	34.70	8.95	39.31	44.92	49.25	68.20	18.95	Peak
5884.857	34.77	8.97	39.32	46.91	51.33	68.20	16.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

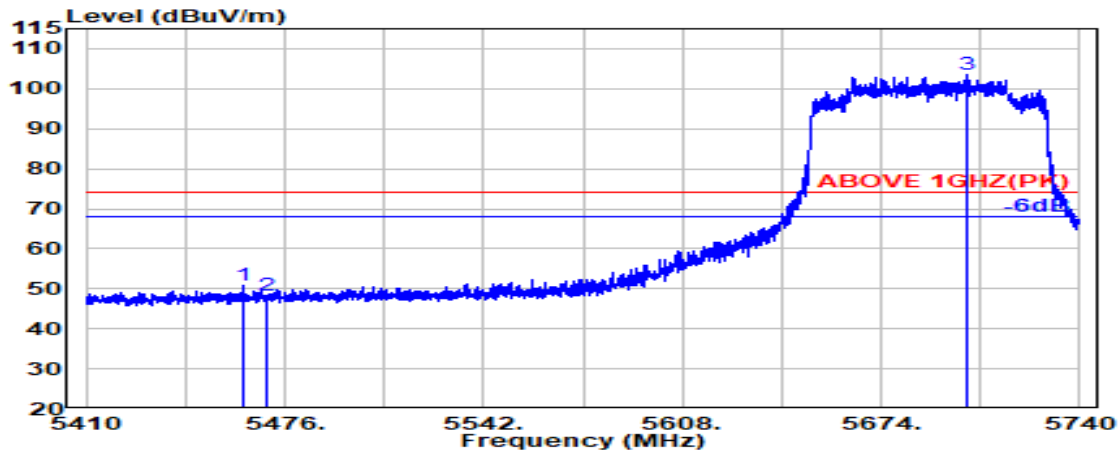

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.140	34.75	8.73	39.25	46.59	50.82	74.00	23.18	Peak
5470.000	34.78	8.74	39.25	43.95	48.21	74.00	25.79	Peak
@ 5702.852	34.41	8.87	39.29	99.46	103.45	---	---	Peak

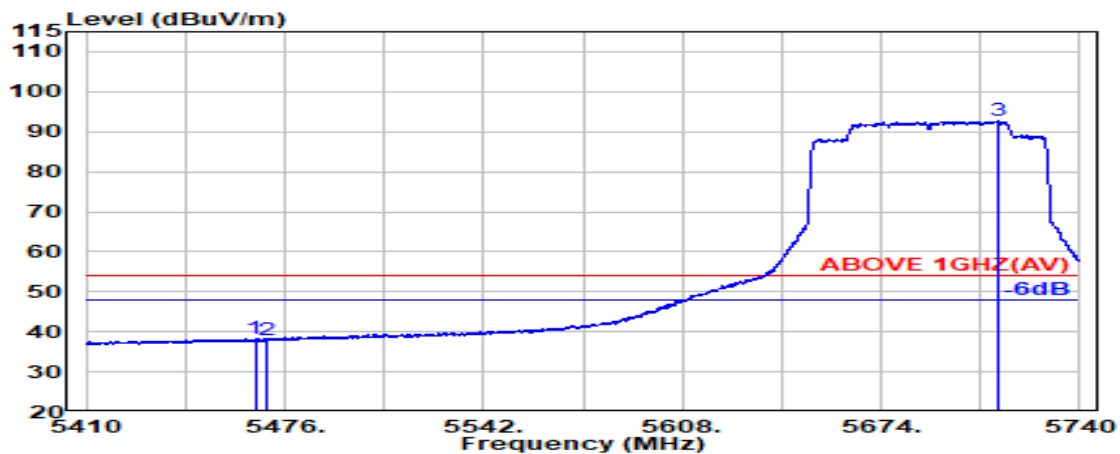


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.76	8.73	39.25	34.01	38.25	74.00	35.75	Peak
5470.000	34.78	8.74	39.25	33.67	37.94	74.00	36.06	Peak
@ 5712.563	34.43	8.87	39.29	88.63	92.64	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

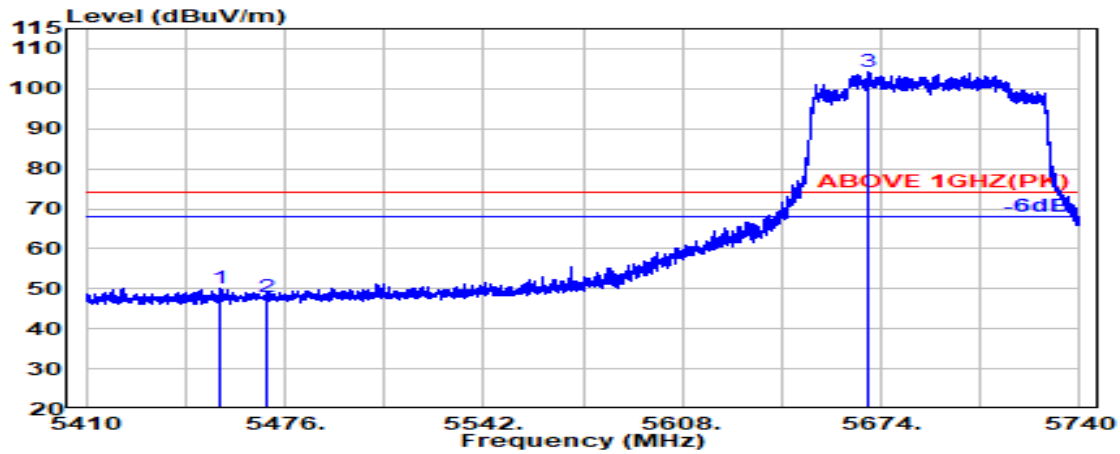

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.691	34.72	8.73	39.25	45.98	50.17	74.00	23.83	Peak
5470.000	34.78	8.74	39.25	43.81	48.08	74.00	25.92	Peak
@ 5669.568	34.52	8.85	39.28	100.31	104.40	---	---	Peak

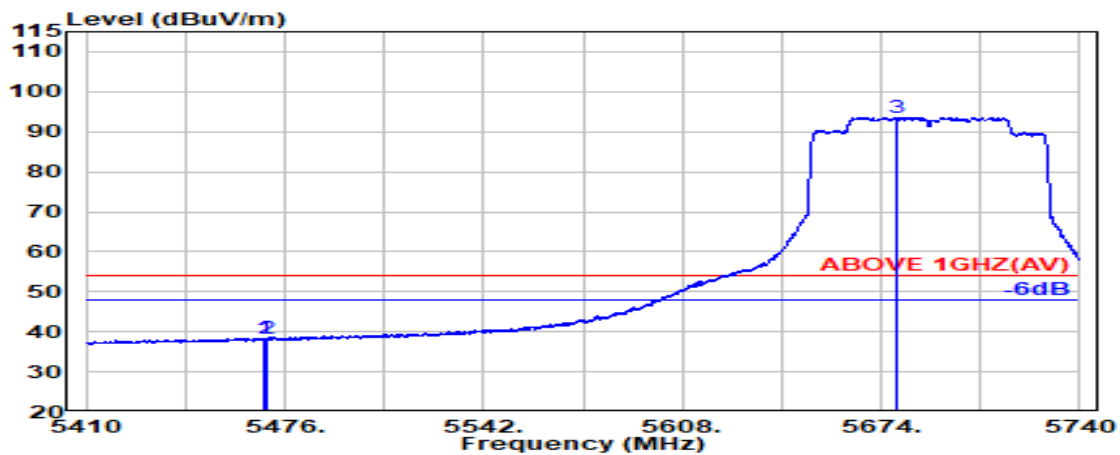


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.929	34.78	8.74	39.25	34.09	38.35	54.00	15.65	Average
5470.000	34.78	8.74	39.25	33.92	38.19	54.00	15.81	Average
@ 5678.809	34.48	8.85	39.28	89.53	93.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

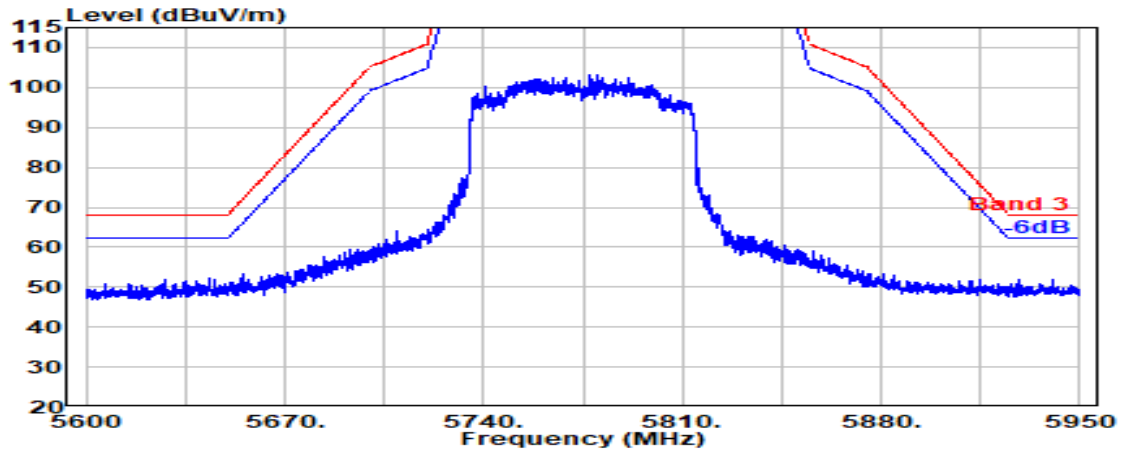

Antenna at Vertical Polarization

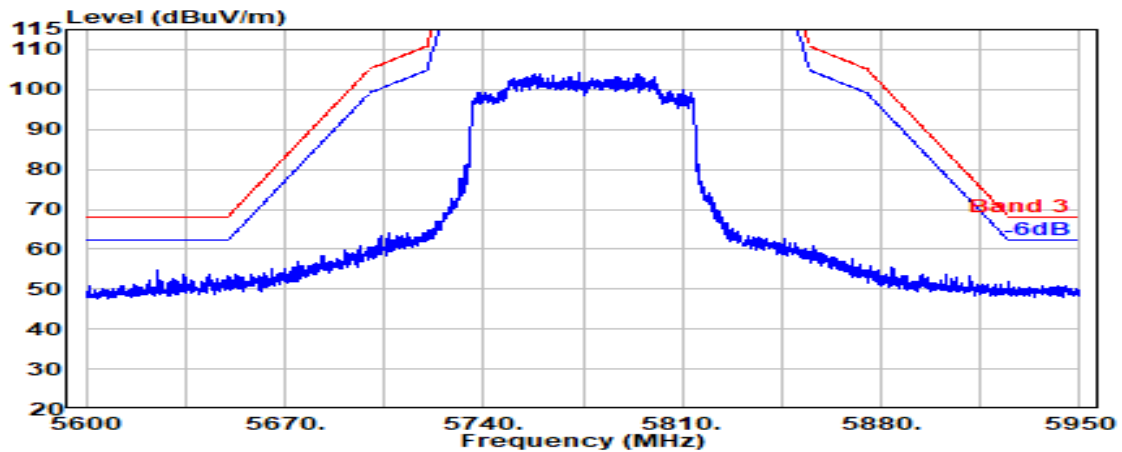


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

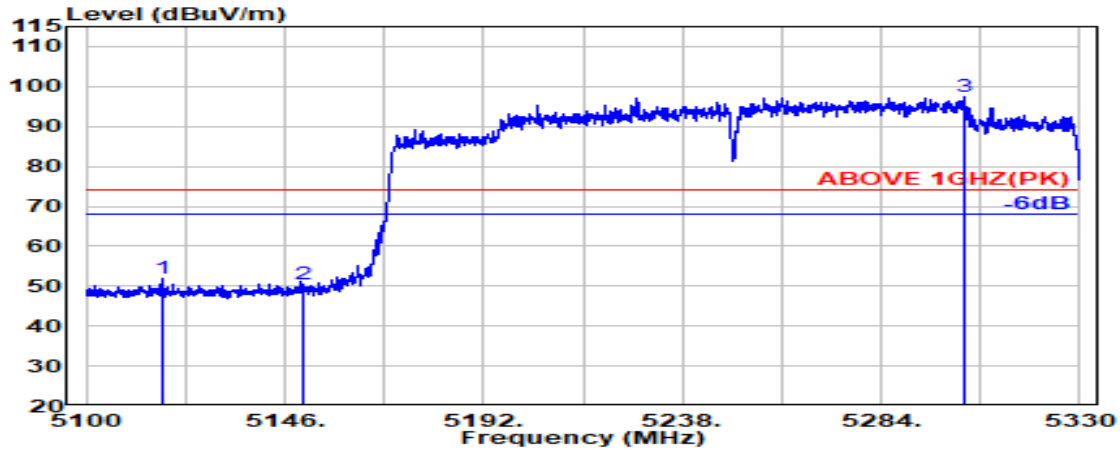

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.700	34.07	8.52	39.27	48.44	51.76	74.00	22.24	Peak
5150.000	34.20	8.54	39.27	47.16	50.64	74.00	23.36	Peak
@ 5303.300	34.59	8.64	39.26	93.45	97.42	---	---	Peak

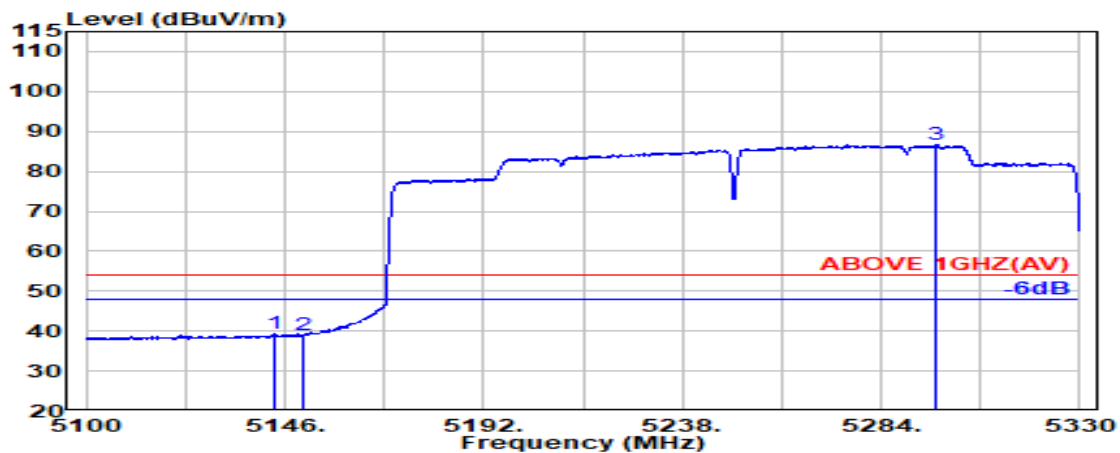


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.700	34.17	8.54	39.27	35.85	39.29	54.00	14.71	Average
5150.000	34.20	8.54	39.27	35.48	38.95	54.00	15.05	Average
@ 5296.500	34.59	8.63	39.26	82.72	86.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

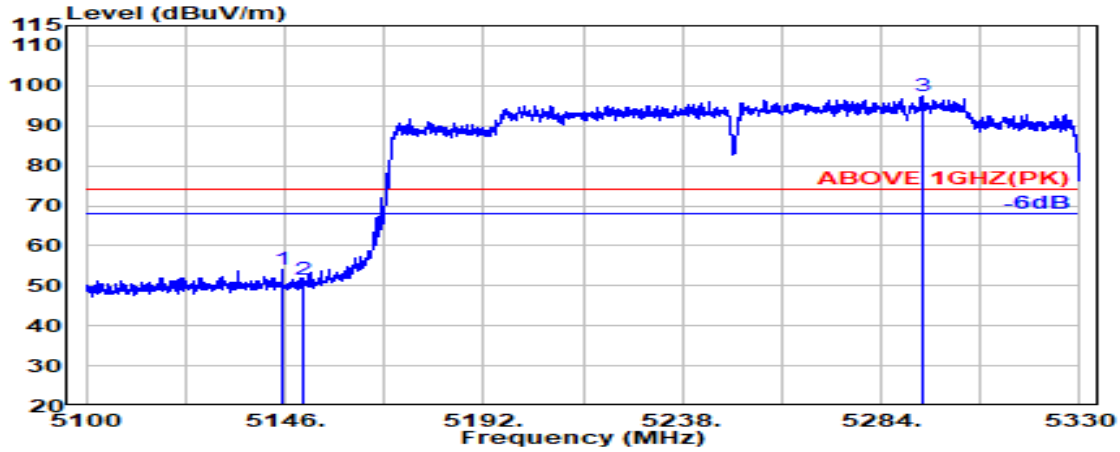

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	34.18	8.54	39.27	50.59	54.04	74.00	19.96	Peak
5150.000	34.20	8.54	39.27	48.08	51.55	74.00	22.45	Peak
@ 5293.400	34.57	8.63	39.26	93.59	97.53	---	---	Peak

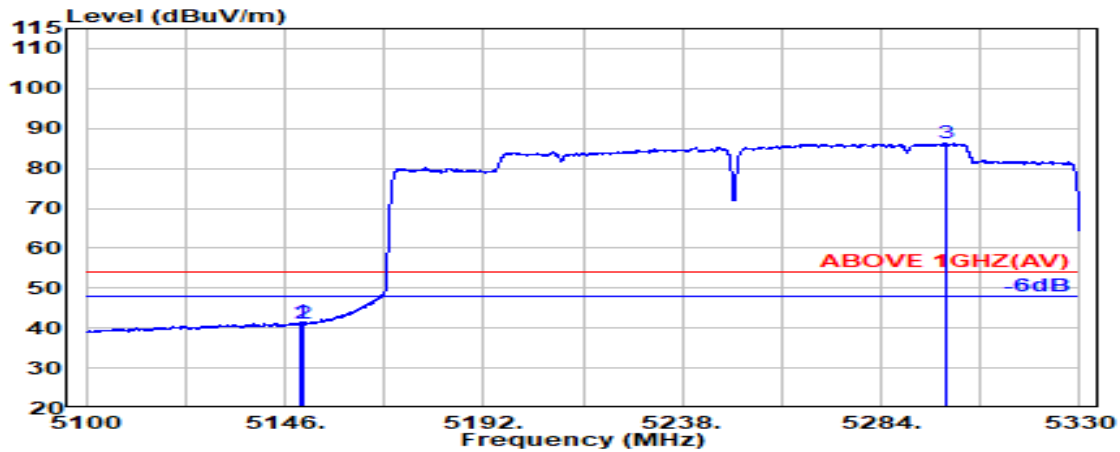

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	8.54	39.27	37.87	41.34	54.00	12.66	Average
5150.000	34.20	8.54	39.27	37.59	41.06	54.00	12.94	Average
@ 5298.800	34.60	8.63	39.26	82.33	86.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.000	34.51	8.62	39.26	93.73	97.60	---	---	Peak
5350.000	34.50	8.67	39.26	49.70	53.61	74.00	20.39	Peak
5406.400	34.61	8.70	39.26	54.24	58.29	74.00	15.71	Peak

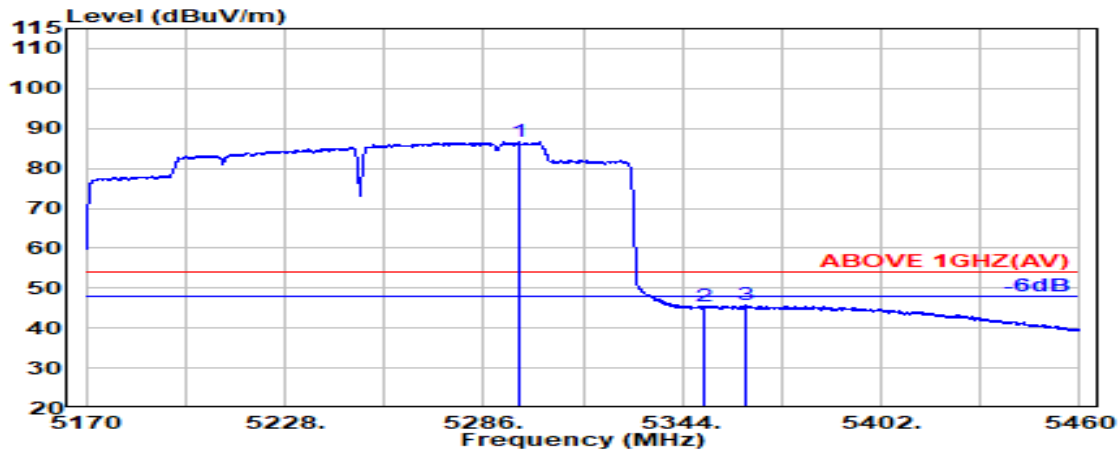


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.200	34.58	8.63	39.26	82.65	86.61	---	---	Average
5350.000	34.50	8.67	39.26	41.57	45.48	54.00	8.52	Average
5362.800	34.53	8.67	39.26	41.69	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

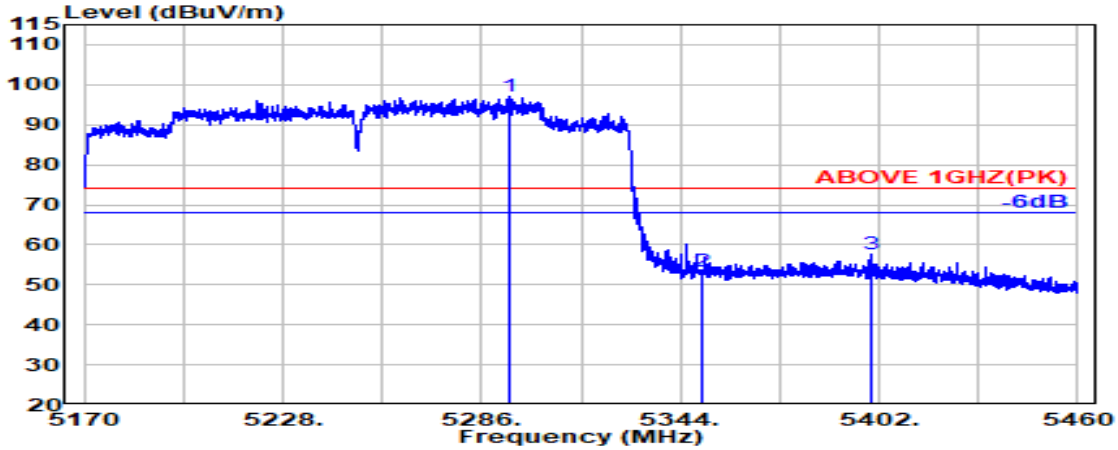

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.400	34.58	8.63	39.26	93.19	97.14	---	---	Peak
5350.000	34.50	8.67	39.26	49.31	53.22	74.00	20.78	Peak
5399.900	34.60	8.69	39.26	53.57	57.60	74.00	16.40	Peak

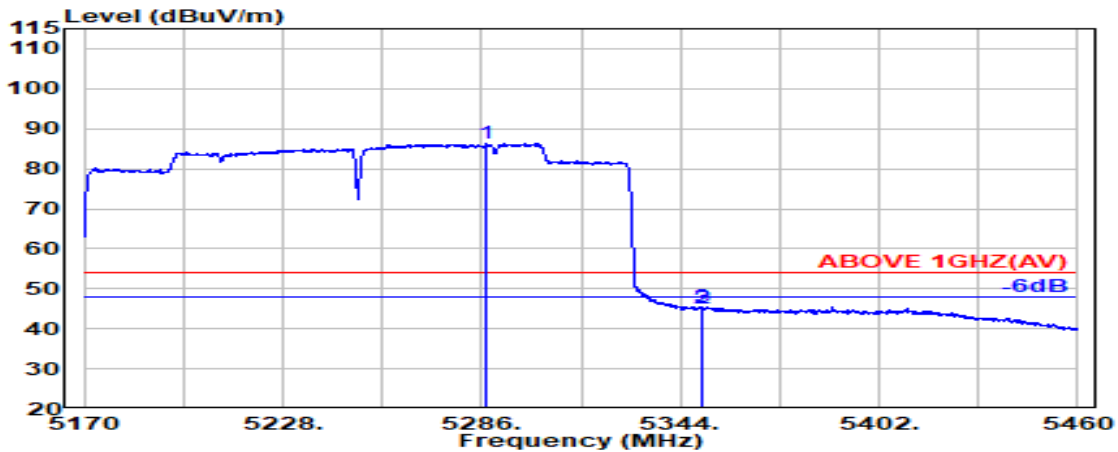


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.500	34.55	8.63	39.26	82.25	86.17	---	---	Average
5350.000	34.50	8.67	39.26	41.17	45.07	54.00	8.93	Average
5350.500	34.50	8.67	39.26	41.51	45.42	54.00	8.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

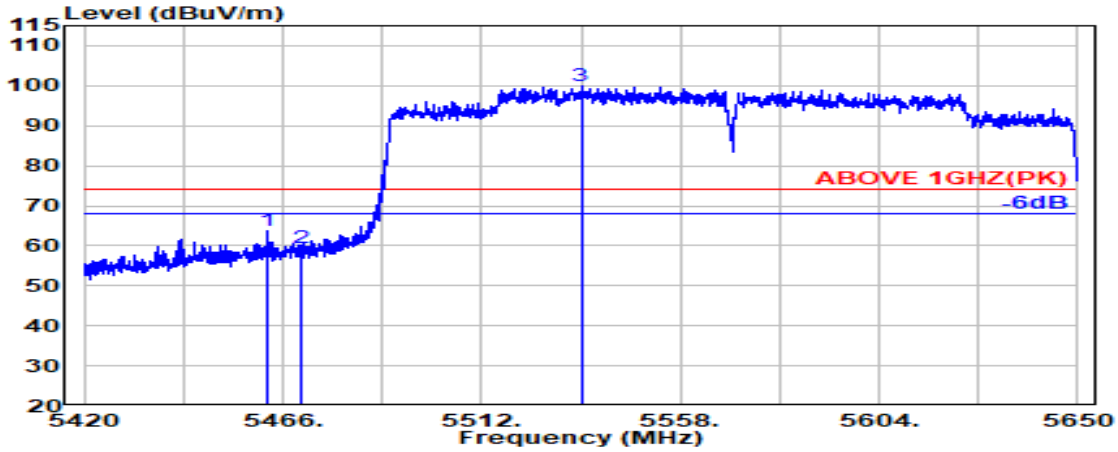

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.75	8.73	39.25	59.39	63.62	74.00	10.38	Peak
5470.000	34.78	8.74	39.25	55.03	59.30	74.00	14.70	Peak
@ 5535.000	34.83	8.77	39.26	95.67	100.02	---	---	Peak

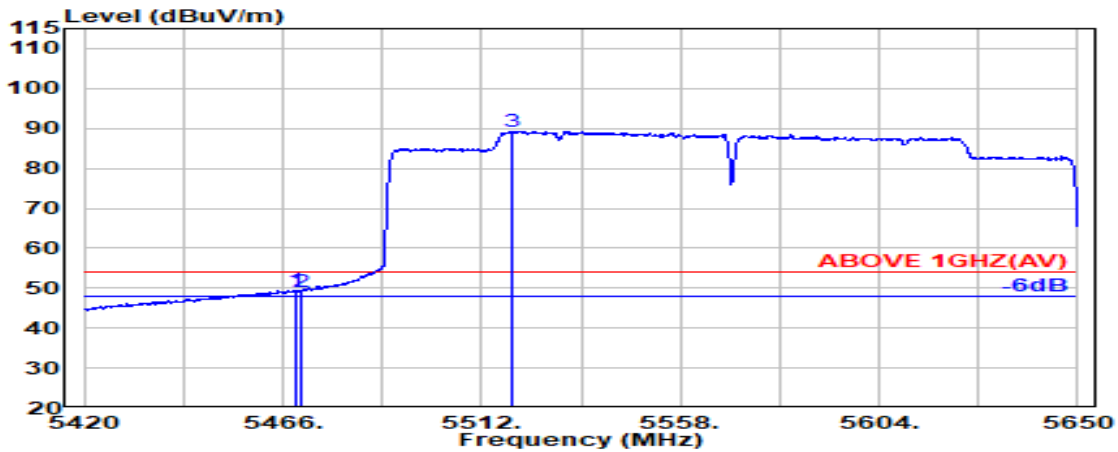


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.78	8.74	39.25	45.18	49.44	54.00	4.56	Average
5470.000	34.78	8.74	39.25	44.90	49.17	54.00	4.83	Average
@ 5519.000	34.86	8.76	39.25	84.89	89.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

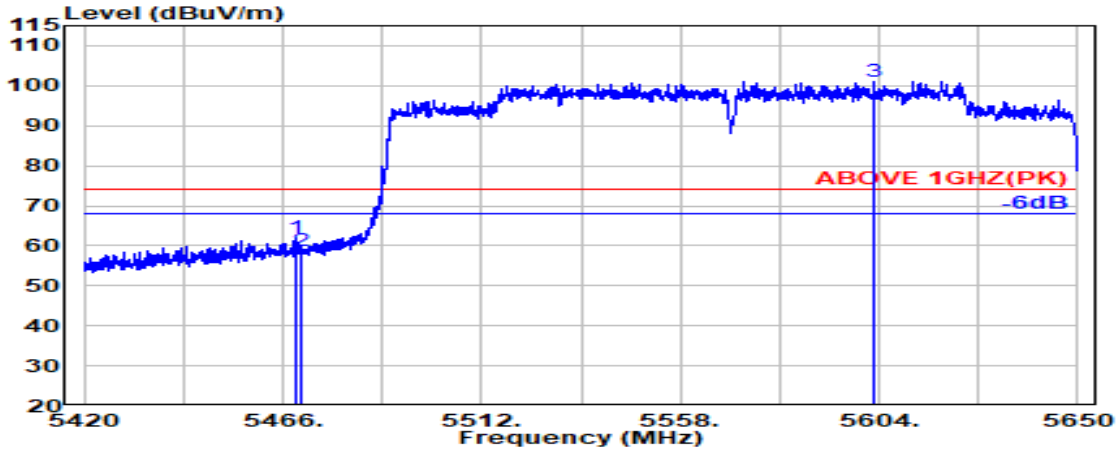

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.78	8.74	39.25	57.57	61.83	74.00	12.17	Peak
5470.000	34.78	8.74	39.25	54.34	58.60	74.00	15.40	Peak
@ 5602.900	34.69	8.81	39.27	96.96	101.19	---	---	Peak

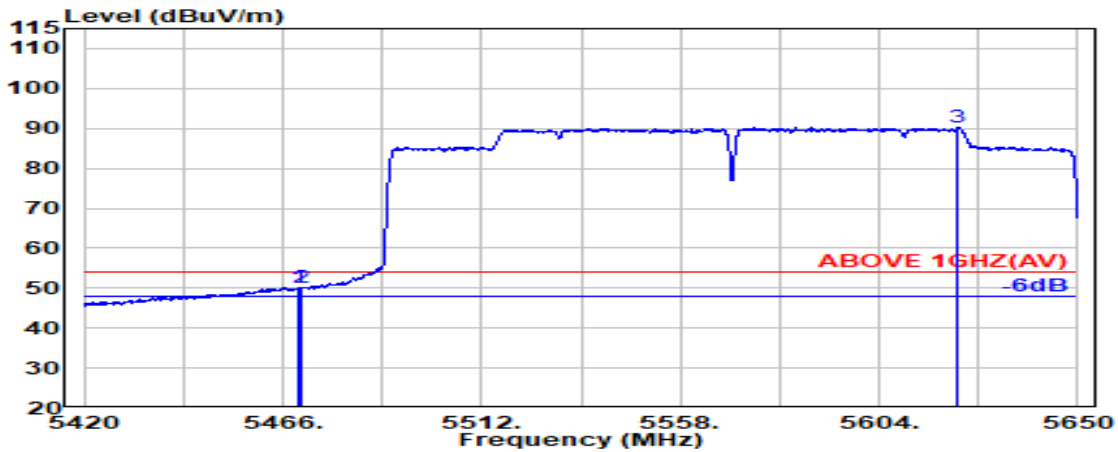


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.78	8.74	39.25	45.90	50.16	54.00	3.84	Average
5470.000	34.78	8.74	39.25	45.79	50.06	54.00	3.94	Average
@ 5622.300	34.66	8.82	39.27	85.98	90.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

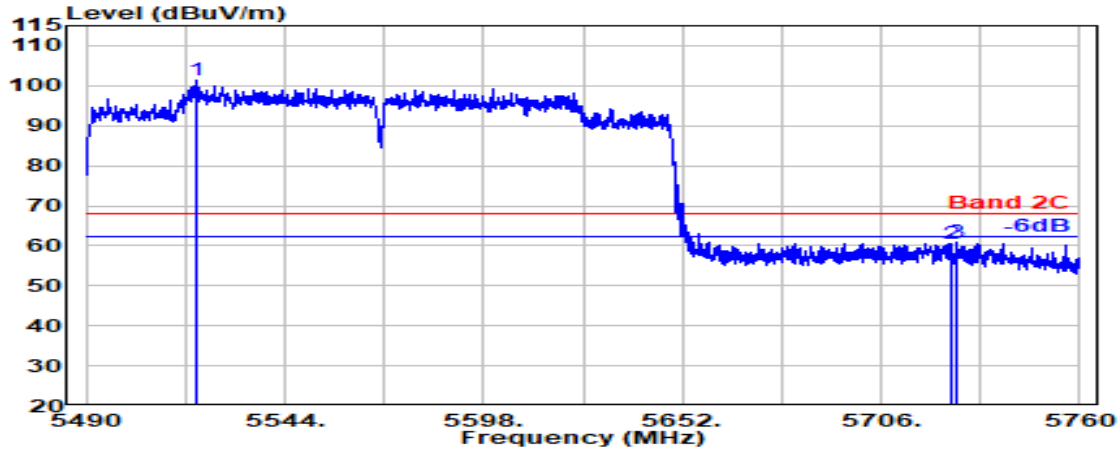

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.200	34.86	8.76	39.25	96.95	101.32	---	---	Peak
5725.000	34.45	8.88	39.29	56.55	60.59	68.20	7.61	Peak
5726.800	34.45	8.88	39.29	56.86	60.90	68.20	7.30	Peak

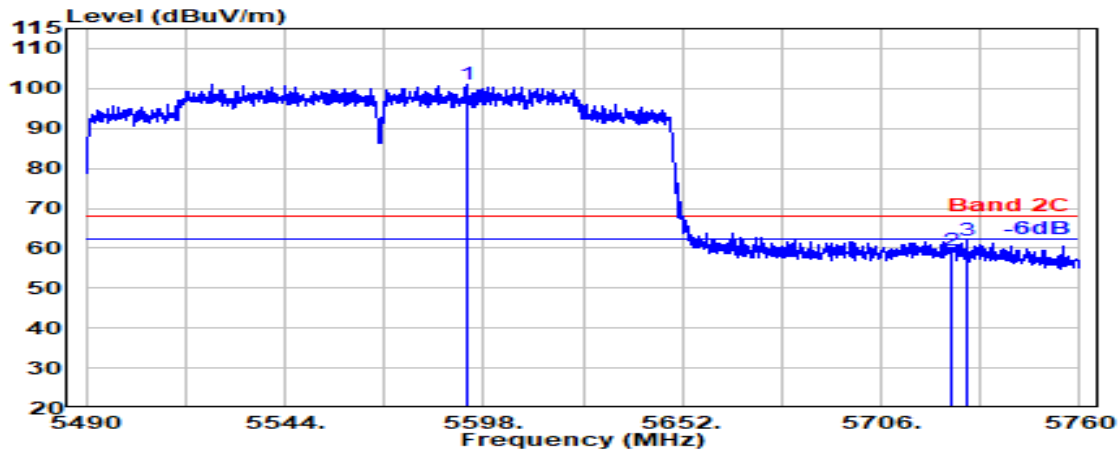


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.300	34.71	8.81	39.27	96.80	101.05	---	---	Peak
5725.000	34.45	8.88	39.29	55.29	59.33	68.20	8.87	Peak
5729.400	34.46	8.88	39.29	57.91	61.96	68.20	6.24	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

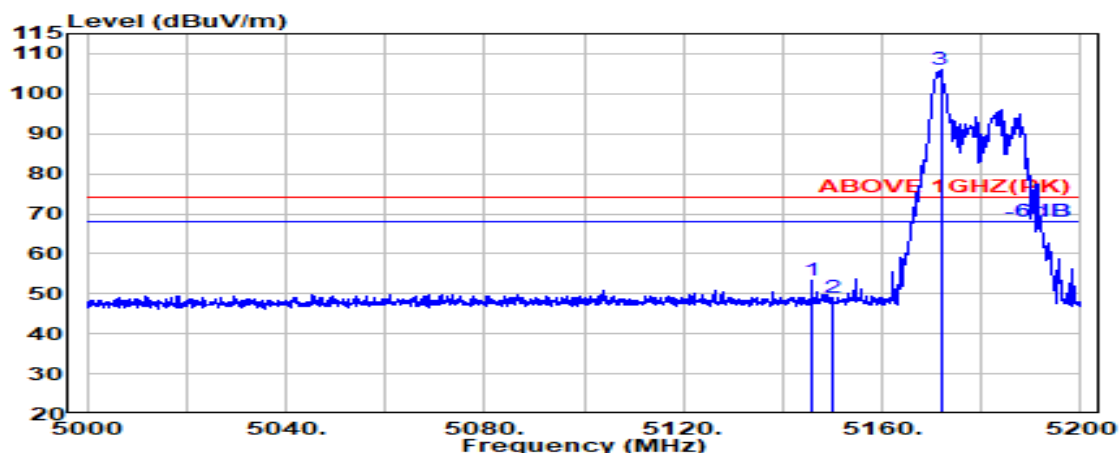

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.800	34.18	8.54	39.27	50.06	53.51	74.00	20.49	Peak
5150.000	34.20	8.54	39.27	45.54	49.01	74.00	24.99	Peak
@ 5171.800	34.24	8.56	39.27	102.40	105.93	---	---	Peak

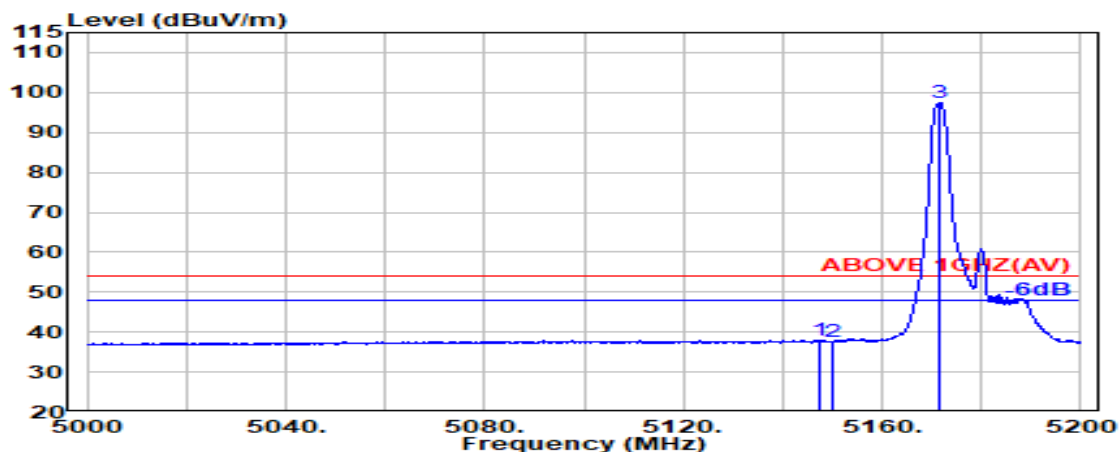


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.300	34.19	8.54	39.27	34.49	37.95	54.00	16.05	Average
5150.000	34.20	8.54	39.27	34.00	37.48	54.00	16.52	Average
@ 5171.600	34.24	8.56	39.27	94.00	97.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

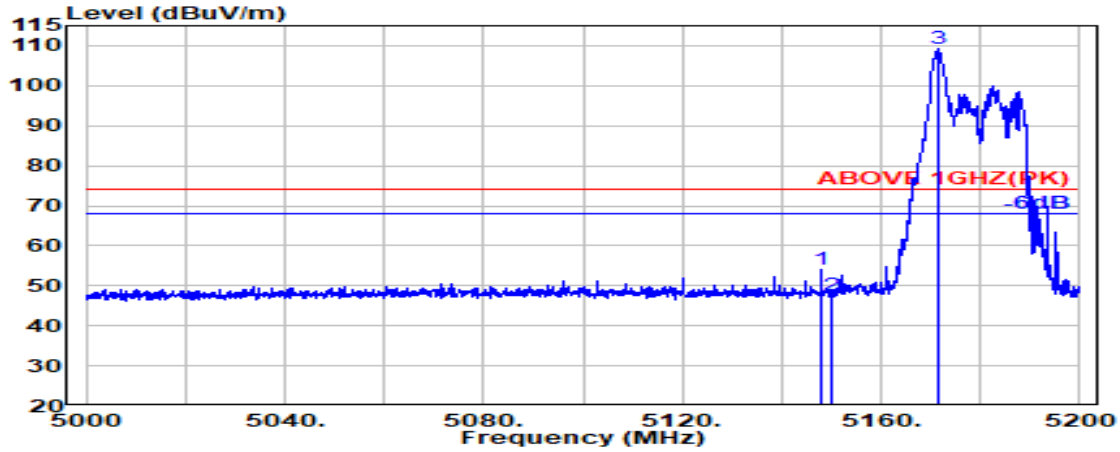

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.19	8.54	39.27	50.49	53.96	74.00	20.04	Peak
5150.000	34.20	8.54	39.27	44.25	47.72	74.00	26.28	Peak
@ 5171.700	34.24	8.56	39.27	105.66	109.19	---	---	Peak

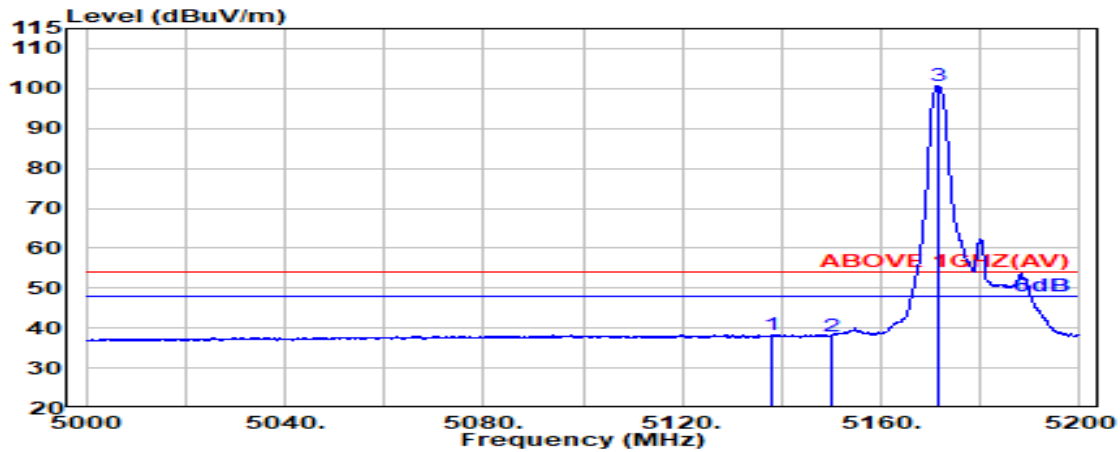


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.000	34.15	8.54	39.27	34.89	38.31	54.00	15.69	Average
5150.000	34.20	8.54	39.27	34.50	37.98	54.00	16.02	Average
@ 5171.400	34.24	8.56	39.27	97.18	100.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

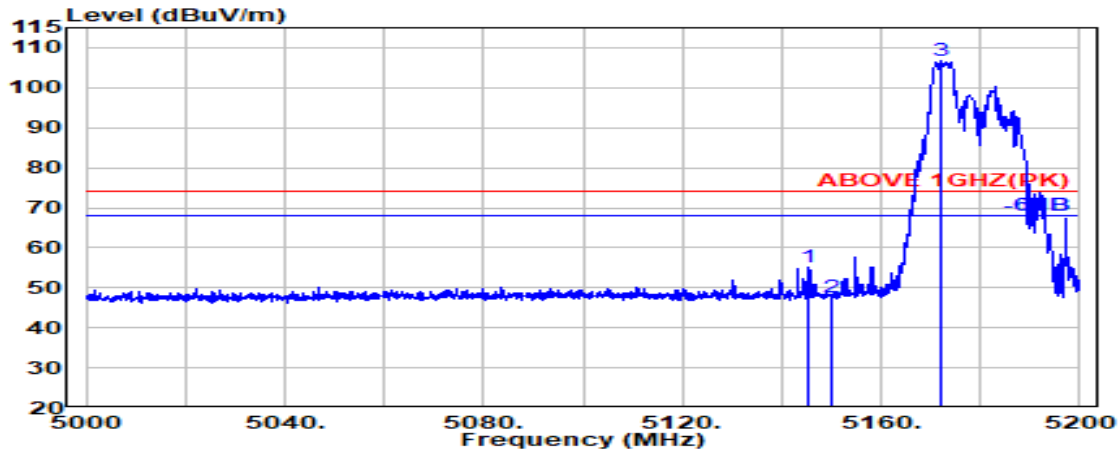

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.200	34.18	8.54	39.27	51.57	55.02	74.00	18.98	Peak
5150.000	34.20	8.54	39.27	44.29	47.76	74.00	26.24	Peak
@ 5172.200	34.24	8.56	39.27	103.13	106.66	---	---	Peak

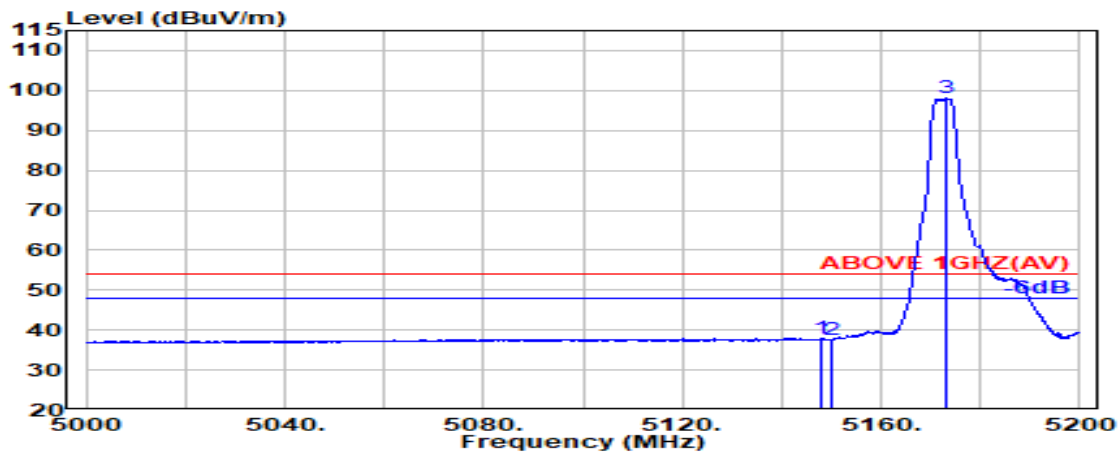


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.19	8.54	39.27	34.48	37.95	54.00	16.05	Average
5150.000	34.20	8.54	39.27	34.04	37.52	54.00	16.48	Average
@ 5173.200	34.25	8.56	39.27	94.58	98.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

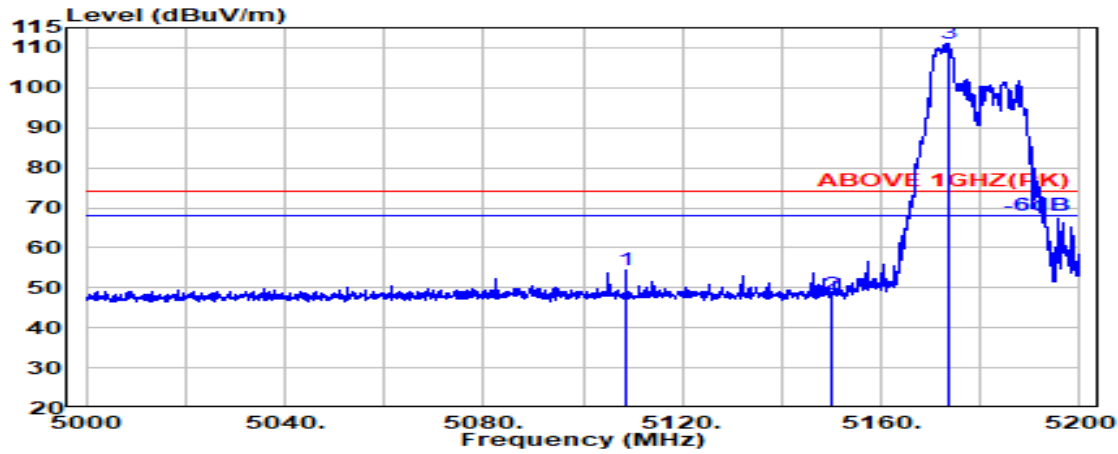

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.700	34.03	8.52	39.27	51.27	54.55	74.00	19.45	Peak
5150.000	34.20	8.54	39.27	44.74	48.21	74.00	25.79	Peak
@ 5173.600	34.25	8.56	39.27	107.46	111.00	---	---	Peak

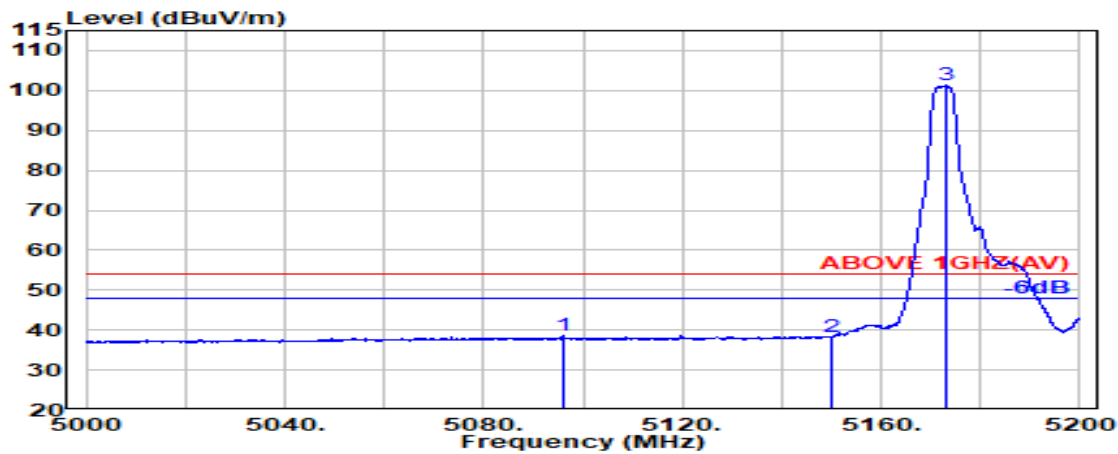


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5095.900	33.98	8.51	39.27	35.28	38.50	54.00	15.50	Average
5150.000	34.20	8.54	39.27	34.82	38.29	54.00	15.71	Average
@ 5173.200	34.25	8.56	39.27	97.81	101.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

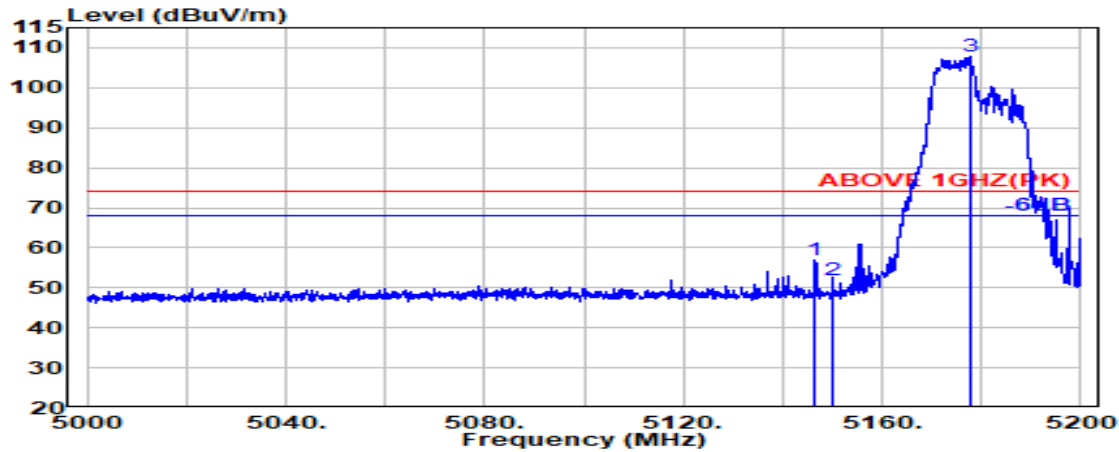

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.19	8.54	39.27	53.46	56.91	74.00	17.09	Peak
5150.000	34.20	8.54	39.27	48.35	51.82	74.00	22.18	Peak
@ 5177.600	34.26	8.56	39.27	104.36	107.91	---	---	Peak

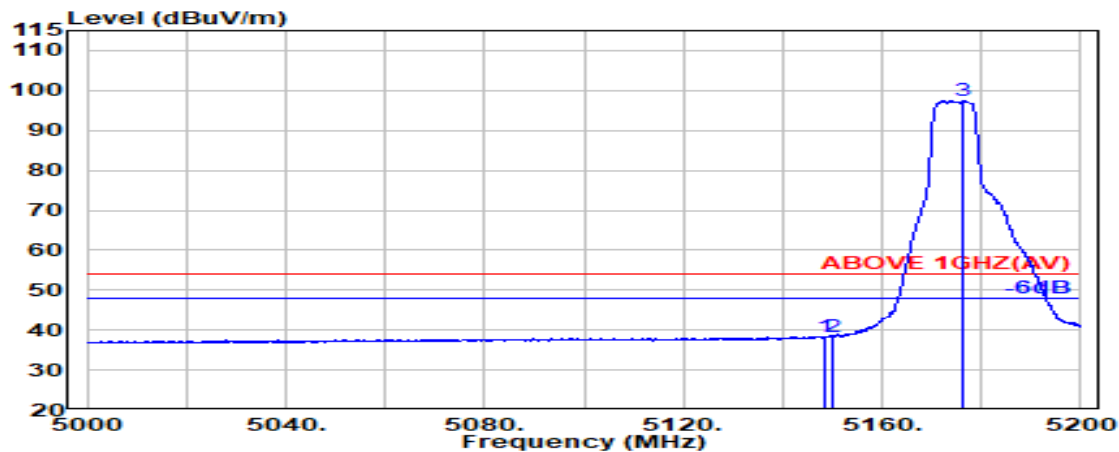


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.27	34.99	38.46	54.00	15.54	Average
5150.000	34.20	8.54	39.27	34.89	38.37	54.00	15.63	Average
@ 5176.400	34.25	8.56	39.27	93.90	97.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

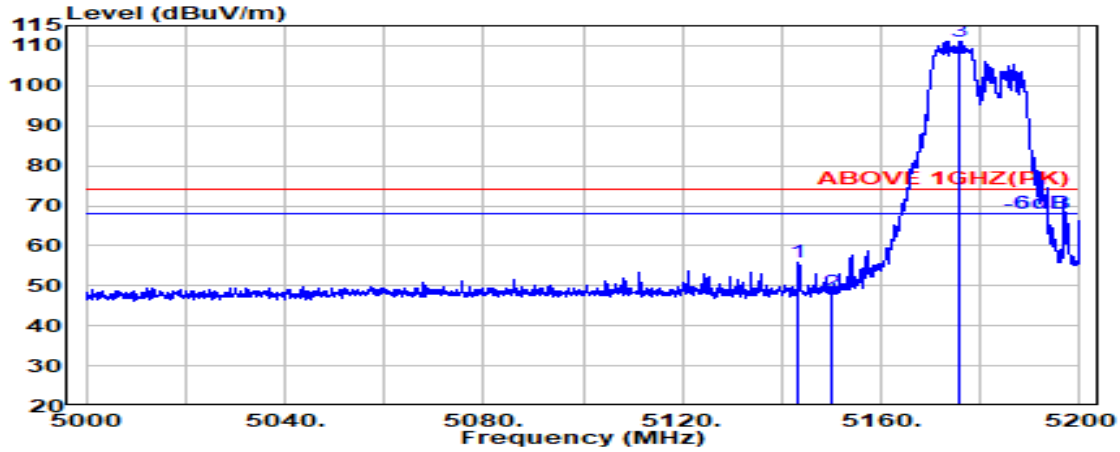

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.300	34.17	8.54	39.27	52.53	55.98	74.00	18.02	Peak
5150.000	34.20	8.54	39.27	44.86	48.33	74.00	25.67	Peak
@ 5175.900	34.25	8.56	39.27	107.60	111.14	---	---	Peak

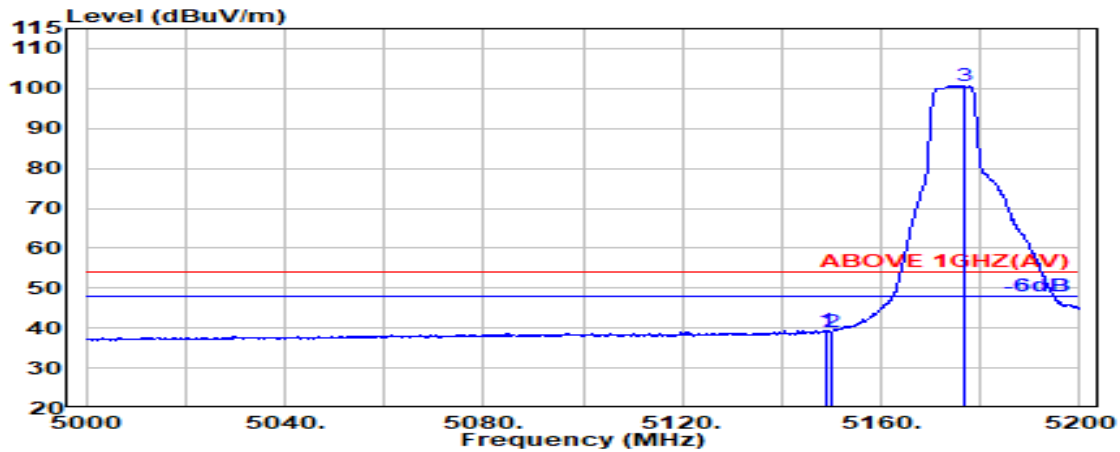


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.54	39.27	35.92	39.38	54.00	14.62	Average
5150.000	34.20	8.54	39.27	35.60	39.07	54.00	14.93	Average
@ 5176.700	34.25	8.56	39.27	97.19	100.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

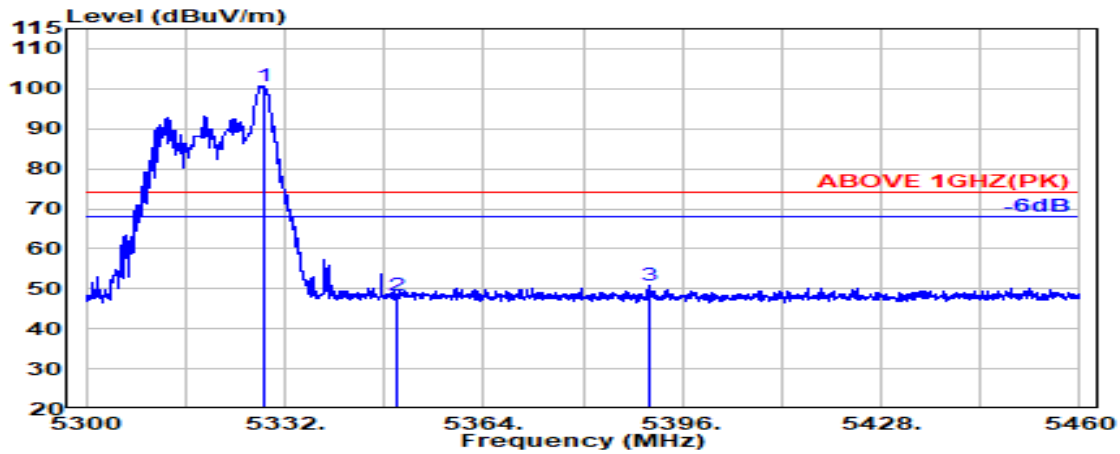

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	34.54	8.65	39.26	96.87	100.80	---	---	Peak
5350.000	34.50	8.67	39.26	44.30	48.21	74.00	25.79	Peak
5390.600	34.58	8.69	39.26	46.74	50.75	74.00	23.25	Peak

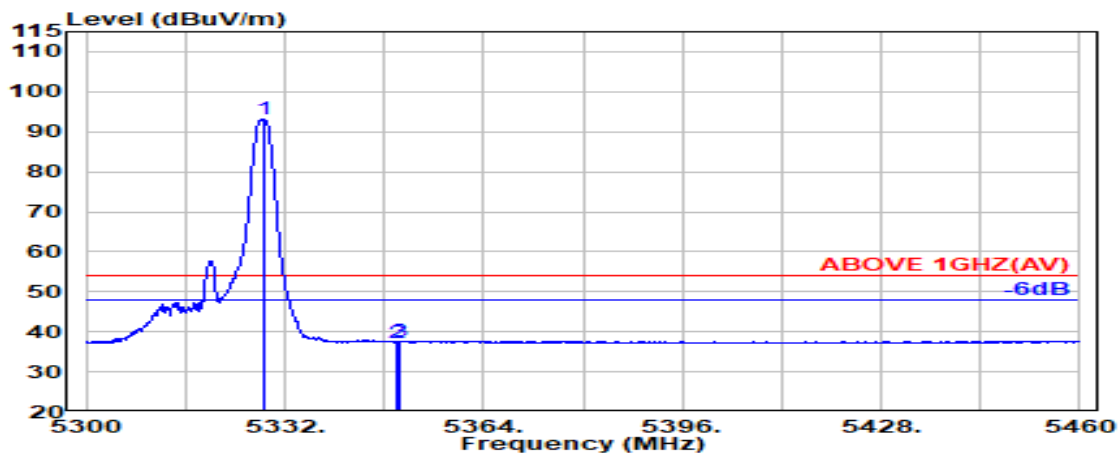


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	34.54	8.65	39.26	89.08	93.02	---	---	Average
5350.000	34.50	8.67	39.26	33.45	37.35	54.00	16.65	Average
5350.400	34.50	8.67	39.26	33.83	37.74	54.00	16.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

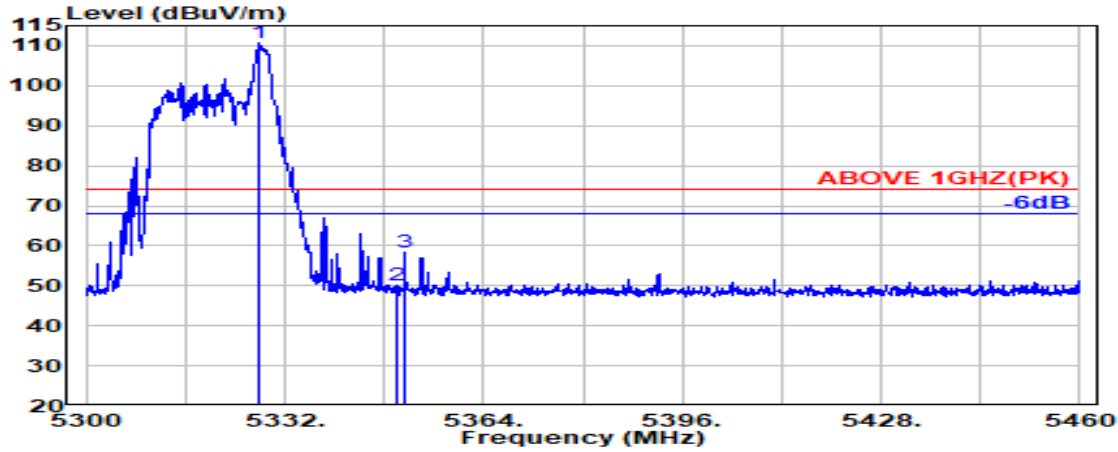

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	34.54	8.65	39.26	106.64	110.58	---	---	Peak
5350.000	34.50	8.67	39.26	46.08	49.99	74.00	24.01	Peak
5351.200	34.50	8.67	39.26	54.34	58.25	74.00	15.75	Peak

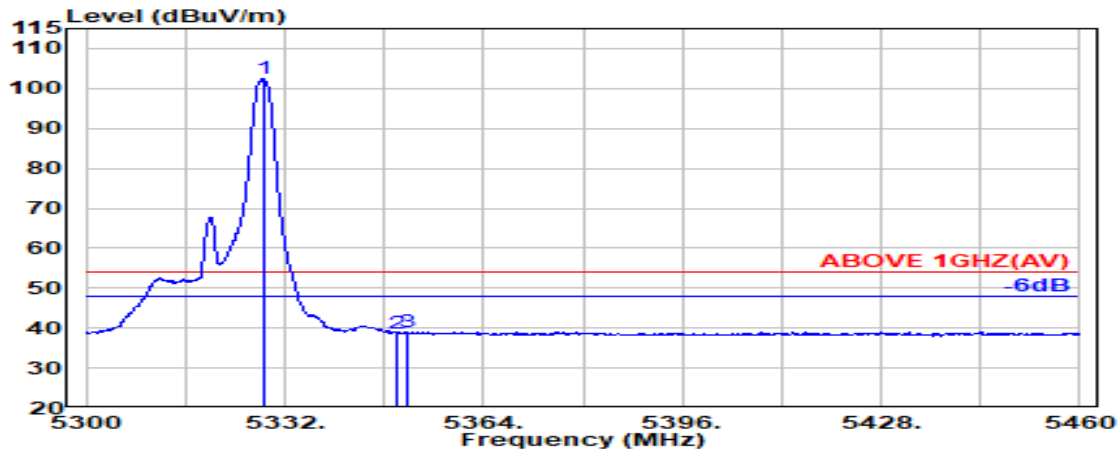


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	34.54	8.65	39.26	98.47	102.41	---	---	Average
5350.000	34.50	8.67	39.26	34.88	38.79	54.00	15.21	Average
5351.900	34.50	8.67	39.26	35.20	39.11	54.00	14.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

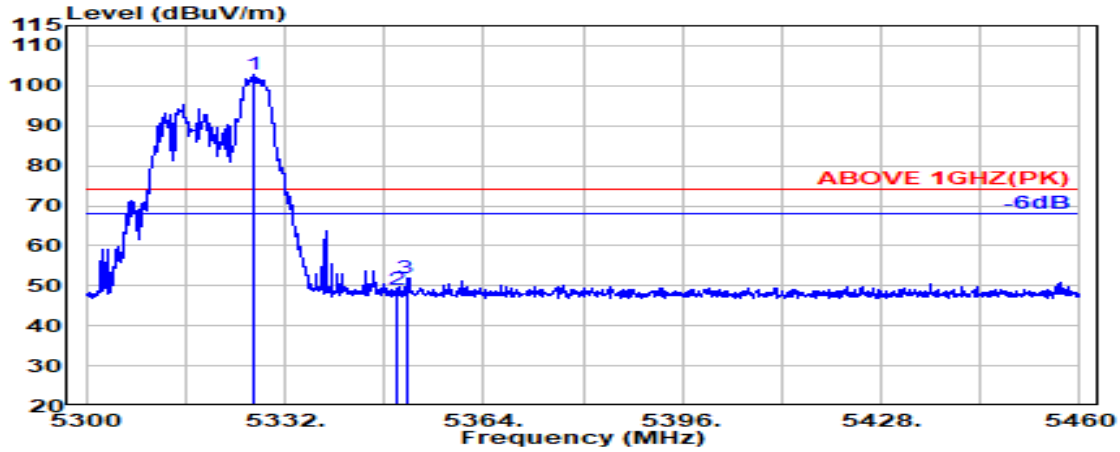

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.800	34.55	8.65	39.26	99.00	102.94	---	---	Peak
5350.000	34.50	8.67	39.26	45.18	49.09	74.00	24.91	Peak
5351.500	34.50	8.67	39.26	47.95	51.86	74.00	22.14	Peak

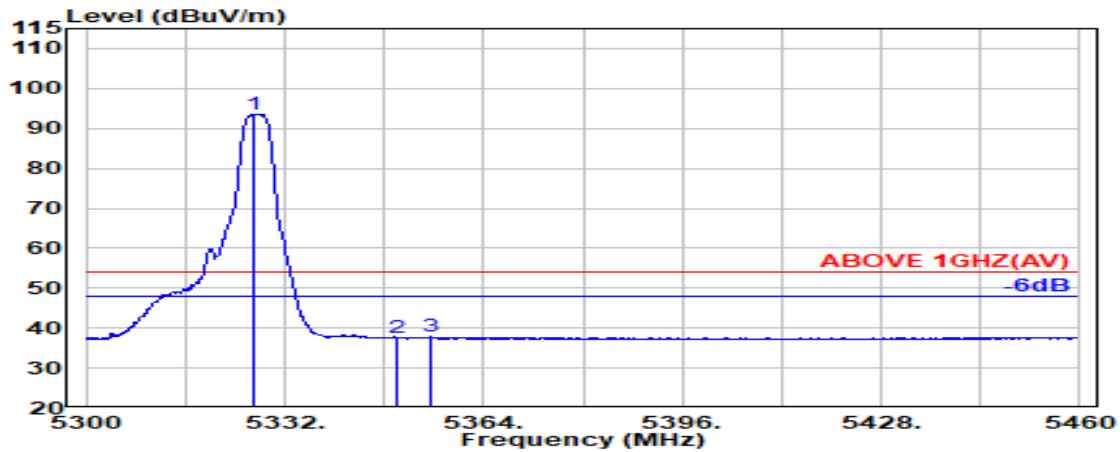


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	34.55	8.65	39.26	89.73	93.66	---	---	Average
5350.000	34.50	8.67	39.26	33.66	37.56	54.00	16.44	Average
5355.500	34.51	8.67	39.26	33.83	37.75	54.00	16.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

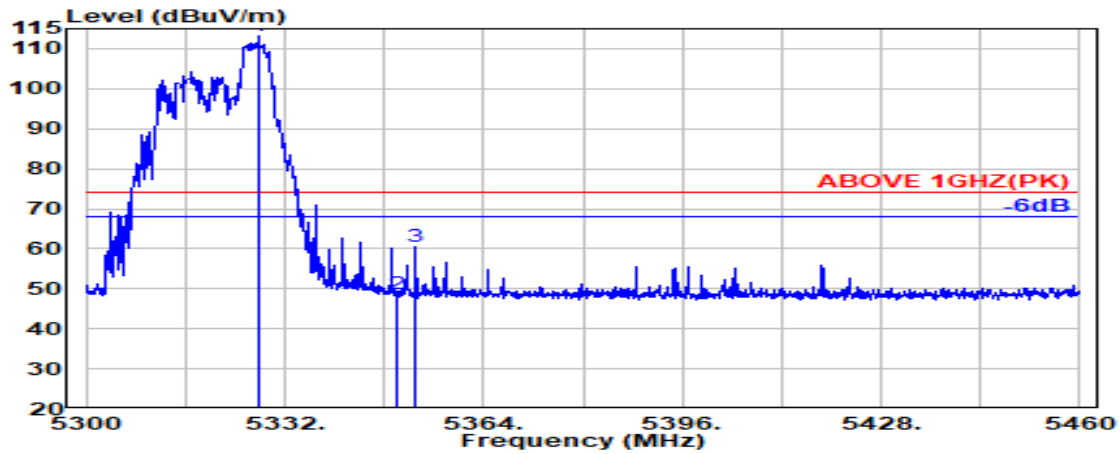

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	34.54	8.65	39.26	109.28	113.22	---	---	Peak
5350.000	34.50	8.67	39.26	44.63	48.53	74.00	25.47	Peak
5353.000	34.51	8.67	39.26	56.48	60.39	74.00	13.61	Peak

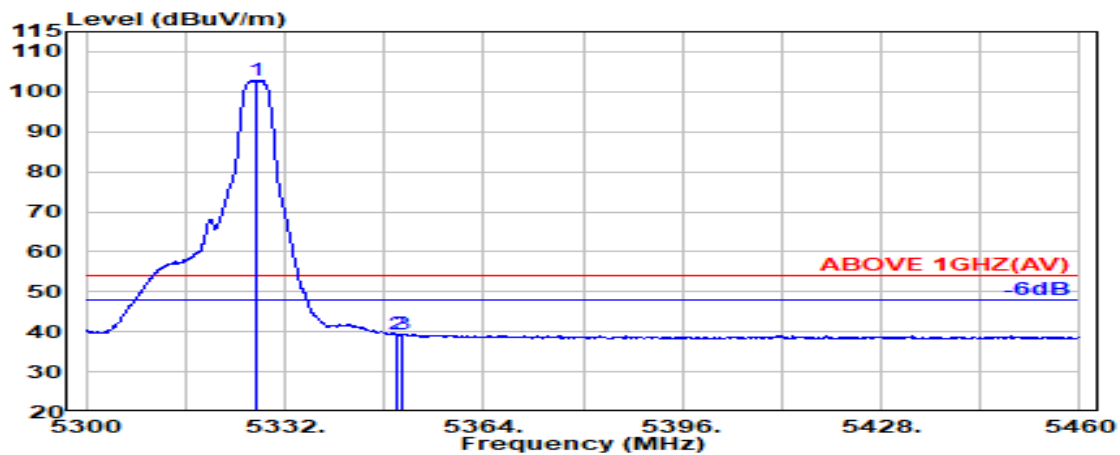


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	34.54	8.65	39.26	98.98	102.92	---	---	Average
5350.000	34.50	8.67	39.26	35.32	39.23	54.00	14.77	Average
5350.700	34.50	8.67	39.26	35.58	39.49	54.00	14.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

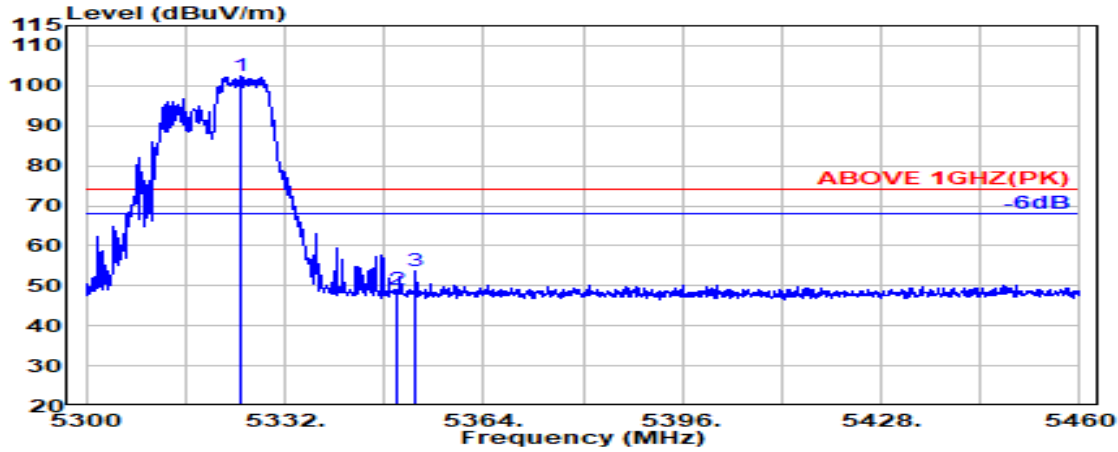

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.800	34.55	8.65	39.26	98.38	102.32	---	---	Peak
5350.000	34.50	8.67	39.26	45.11	49.01	74.00	24.99	Peak
5353.100	34.51	8.67	39.26	49.78	53.69	74.00	20.31	Peak

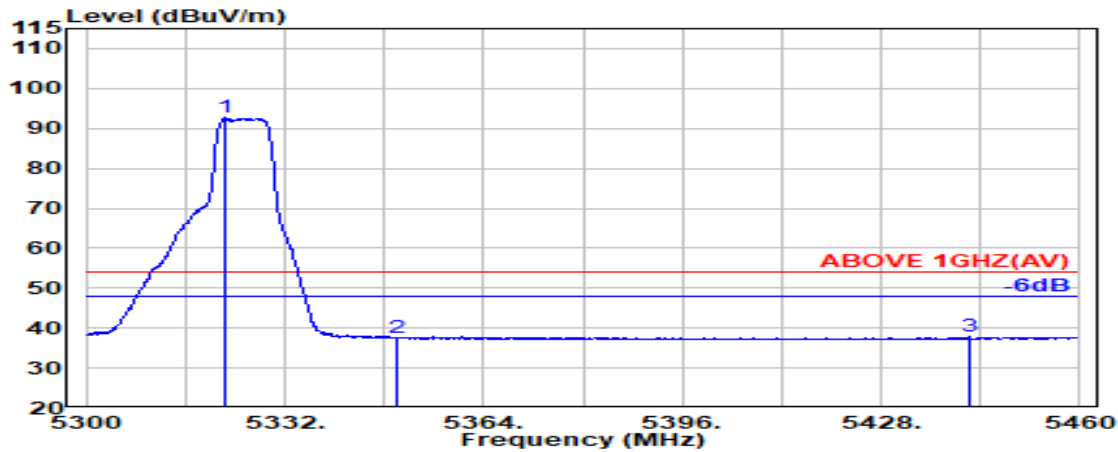


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	34.56	8.65	39.26	88.71	92.66	---	---	Average
5350.000	34.50	8.67	39.26	33.74	37.65	54.00	16.35	Average
5442.200	34.68	8.72	39.25	33.64	37.80	54.00	16.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

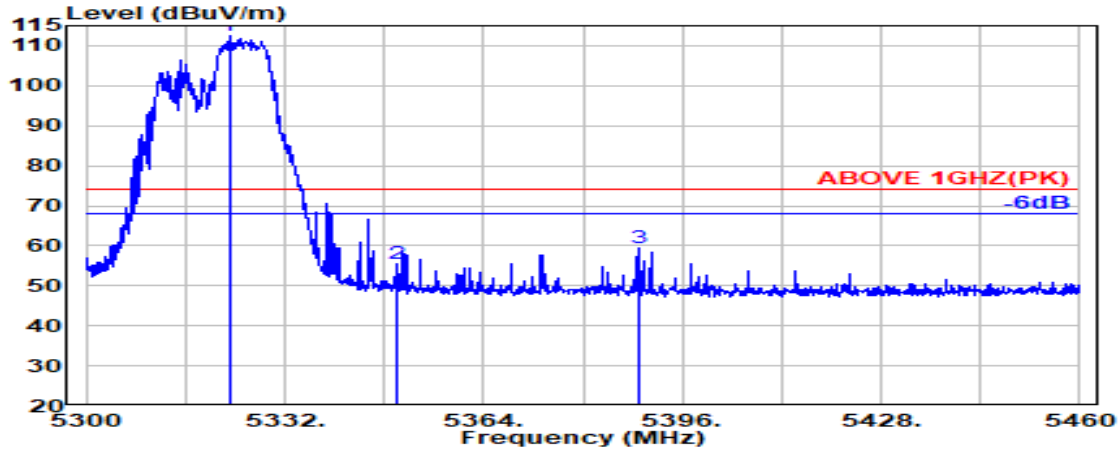

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	34.55	8.65	39.26	108.44	112.38	---	---	Peak
5350.000	34.50	8.67	39.26	51.48	55.39	74.00	18.61	Peak
5388.900	34.58	8.69	39.26	55.56	59.57	74.00	14.43	Peak

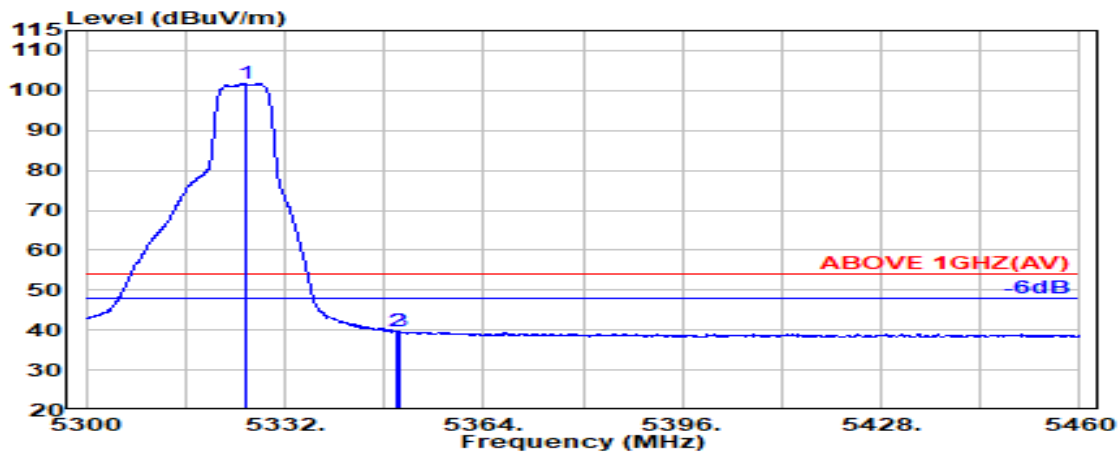


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.900	34.55	8.65	39.26	97.70	101.64	---	---	Average
5350.000	34.50	8.67	39.26	35.70	39.60	54.00	14.40	Average
5350.600	34.50	8.67	39.26	35.69	39.60	54.00	14.40	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

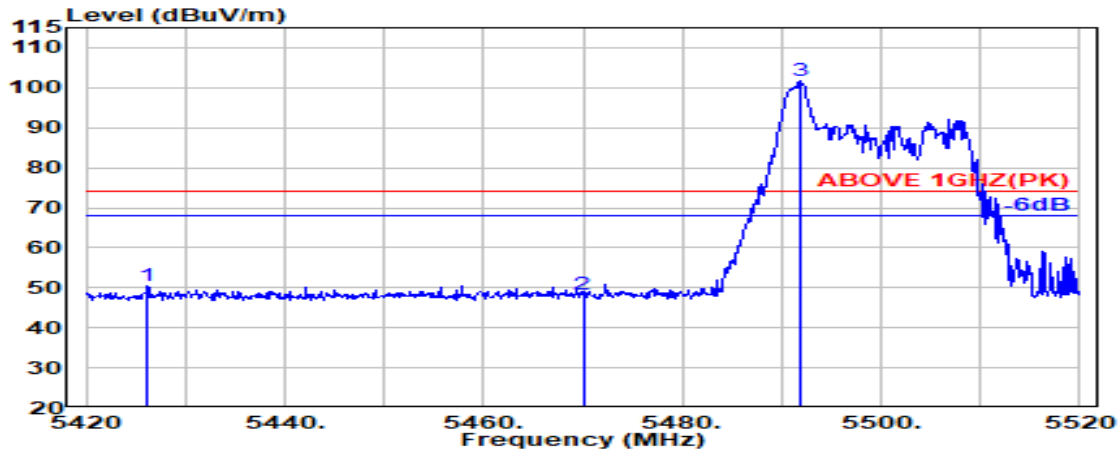

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.200	34.65	8.71	39.25	46.49	50.60	74.00	23.40	Peak
5470.000	34.78	8.74	39.25	44.13	48.39	74.00	25.61	Peak
@ 5491.800	34.87	8.75	39.25	97.45	101.81	---	---	Peak

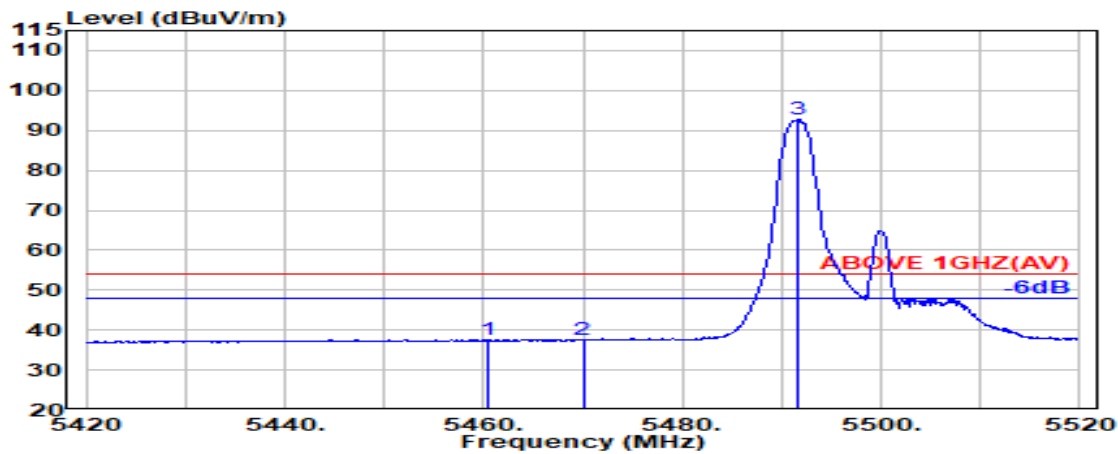


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.74	8.73	39.25	33.45	37.67	54.00	16.33	Average
5470.000	34.78	8.74	39.25	33.28	37.55	54.00	16.45	Average
@ 5491.700	34.87	8.75	39.25	88.46	92.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

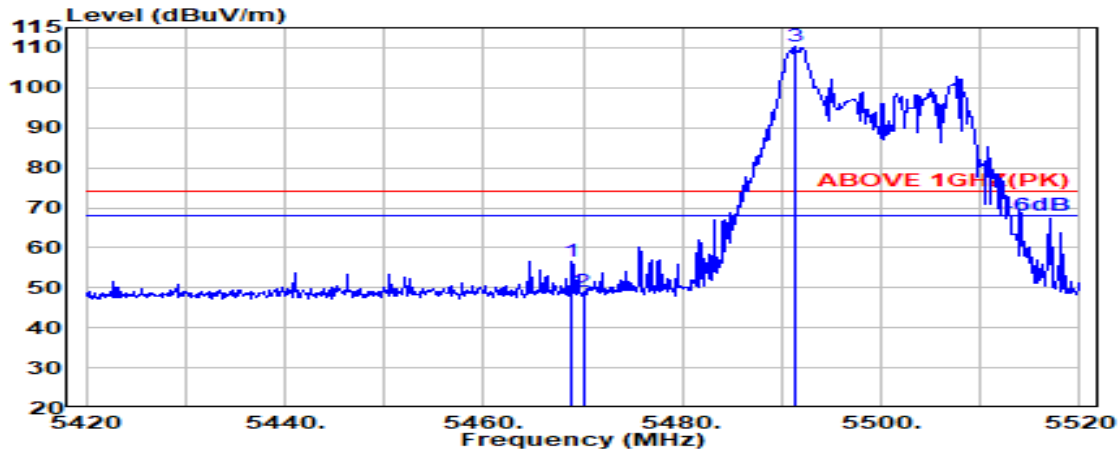

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	52.40	56.66	74.00	17.34	Peak
5470.000	34.78	8.74	39.25	44.74	49.01	74.00	24.99	Peak
@ 5491.300	34.87	8.75	39.25	105.81	110.17	---	---	Peak

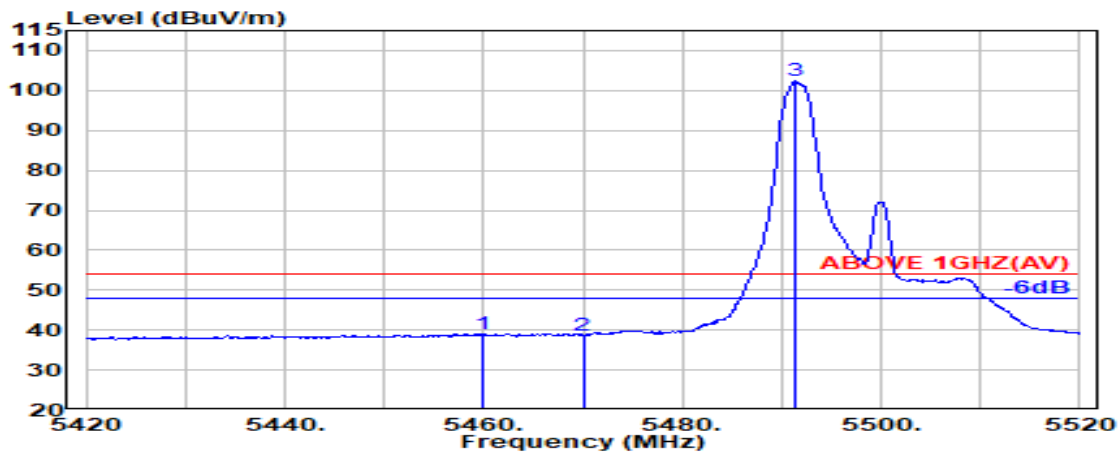


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.74	8.73	39.25	34.84	39.06	54.00	14.94	Average
5470.000	34.78	8.74	39.25	34.51	38.77	54.00	15.23	Average
@ 5491.400	34.87	8.75	39.25	98.03	102.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

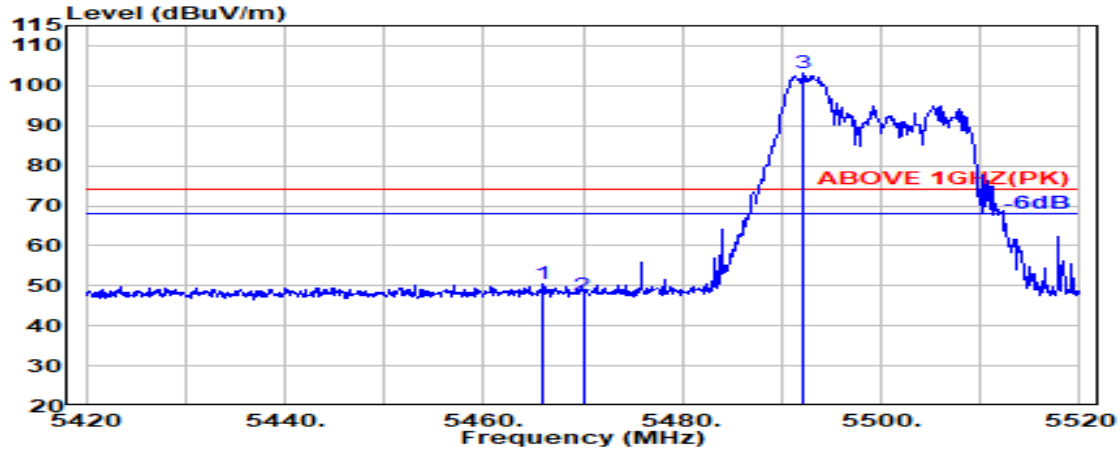

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.76	8.73	39.25	46.13	50.37	74.00	23.63	Peak
5470.000	34.78	8.74	39.25	43.42	47.69	74.00	26.31	Peak
@ 5492.200	34.87	8.75	39.25	98.94	103.31	---	---	Peak

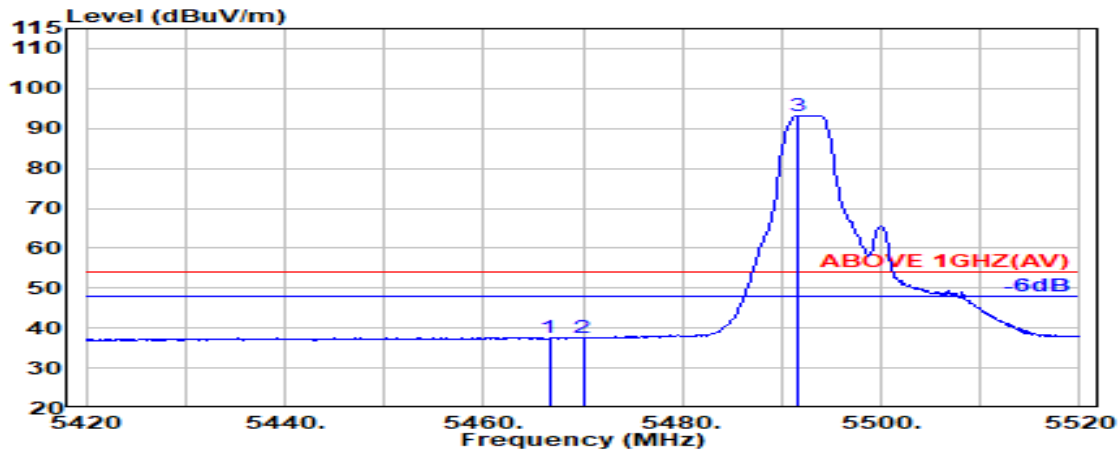


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.77	8.73	39.25	33.41	37.66	54.00	16.34	Average
5470.000	34.78	8.74	39.25	33.27	37.53	54.00	16.47	Average
@ 5491.600	34.87	8.75	39.25	88.93	93.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

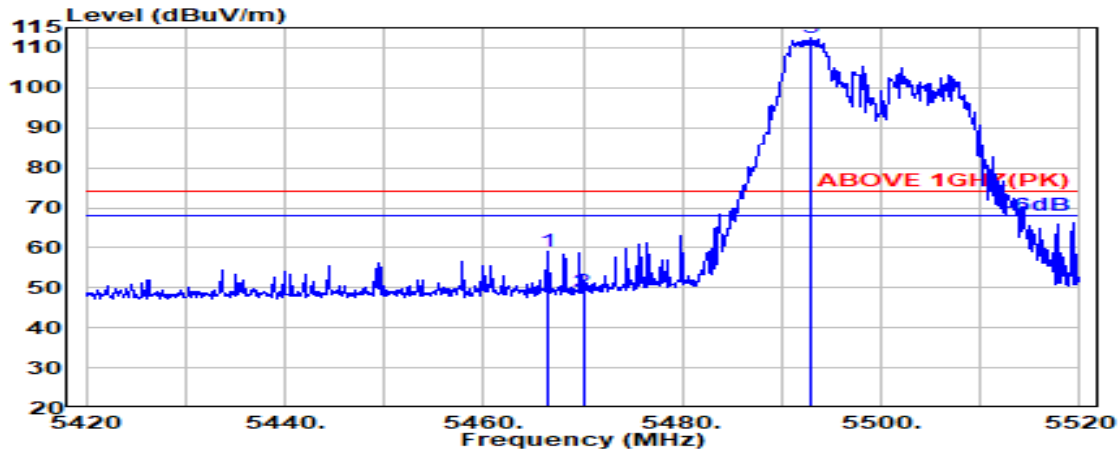

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.77	8.73	39.25	54.71	58.96	74.00	15.04	Peak
5470.000	34.78	8.74	39.25	44.64	48.91	74.00	25.09	Peak
@ 5493.000	34.87	8.75	39.25	108.09	112.46	---	---	Peak

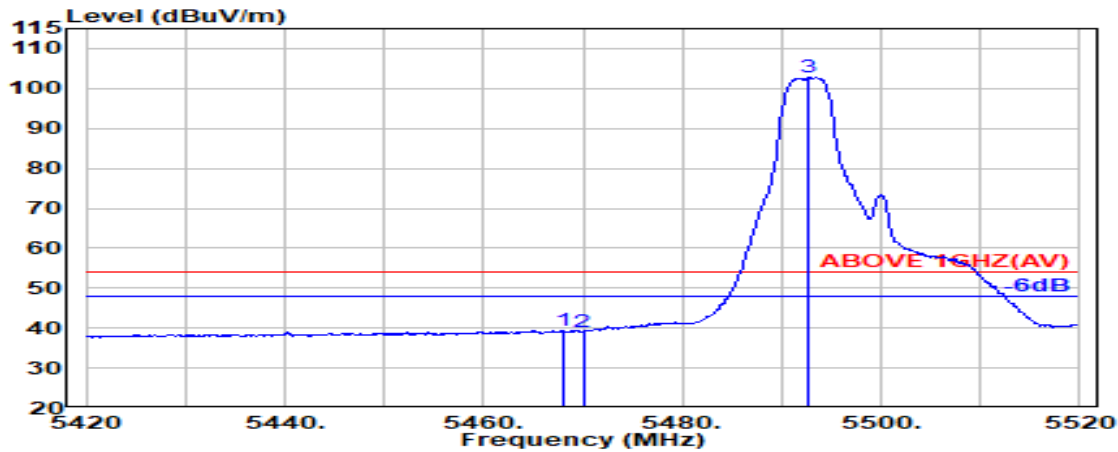


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.77	8.73	39.25	35.20	39.45	54.00	14.55	Average
5470.000	34.78	8.74	39.25	34.91	39.17	54.00	14.83	Average
@ 5492.700	34.87	8.75	39.25	98.34	102.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

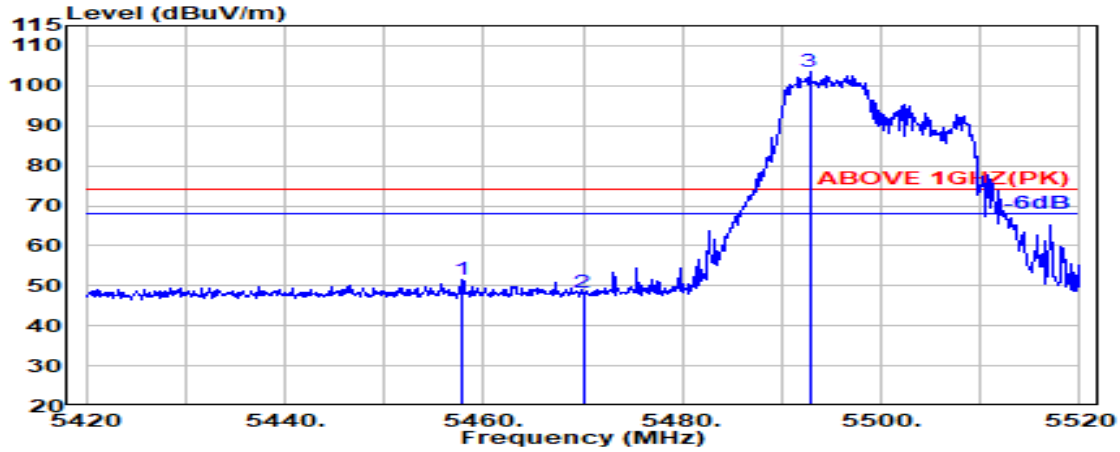

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.73	8.73	39.25	47.27	51.48	74.00	22.52	Peak
5470.000	34.78	8.74	39.25	44.15	48.41	74.00	25.59	Peak
@ 5492.800	34.87	8.75	39.25	98.99	103.36	---	---	Peak

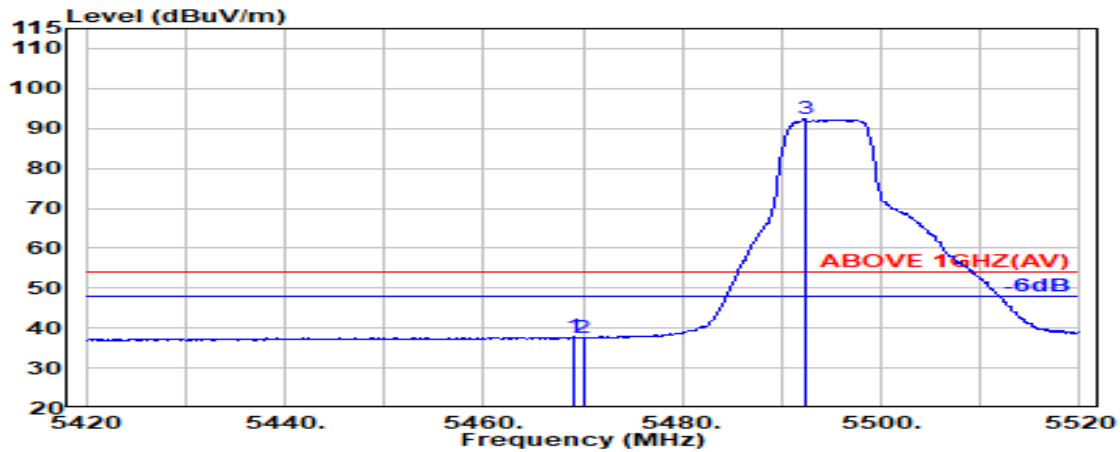


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	33.52	37.78	54.00	16.22	Average
5470.000	34.78	8.74	39.25	33.35	37.62	54.00	16.38	Average
@ 5492.300	34.87	8.75	39.25	87.92	92.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

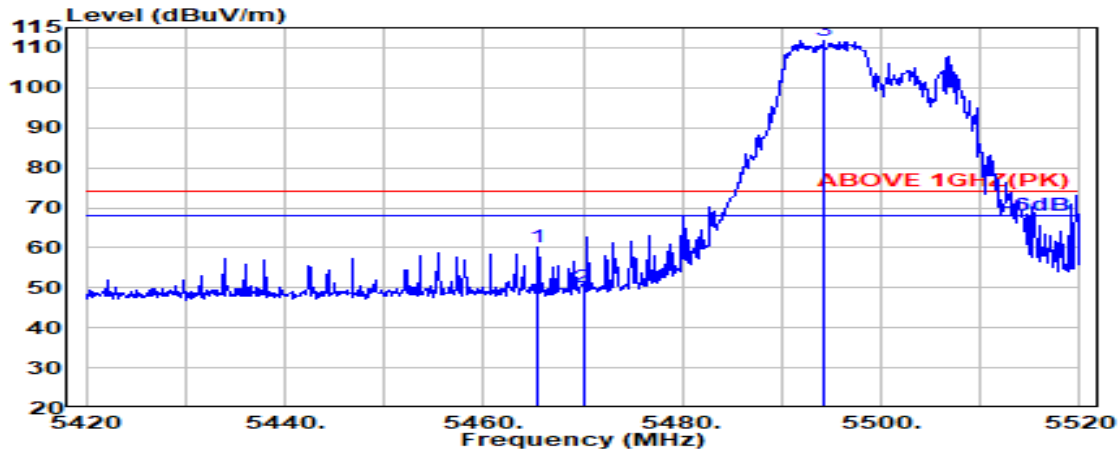

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.76	8.73	39.25	55.99	60.23	74.00	13.77	Peak
5470.000	34.78	8.74	39.25	45.95	50.21	74.00	23.79	Peak
@ 5494.200	34.88	8.75	39.25	107.55	111.93	---	---	Peak

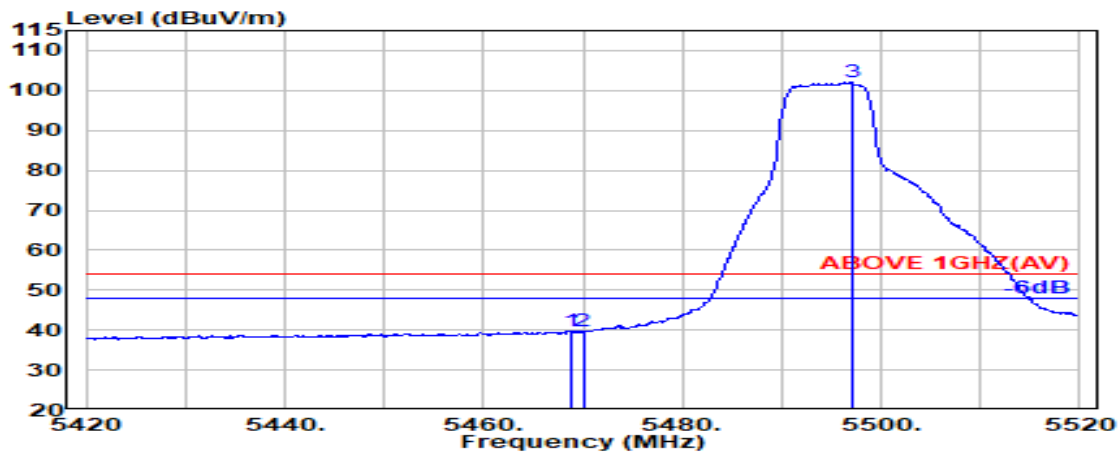


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	35.42	39.67	54.00	14.33	Average
5470.000	34.78	8.74	39.25	35.53	39.80	54.00	14.20	Average
@ 5497.000	34.89	8.75	39.25	97.68	102.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

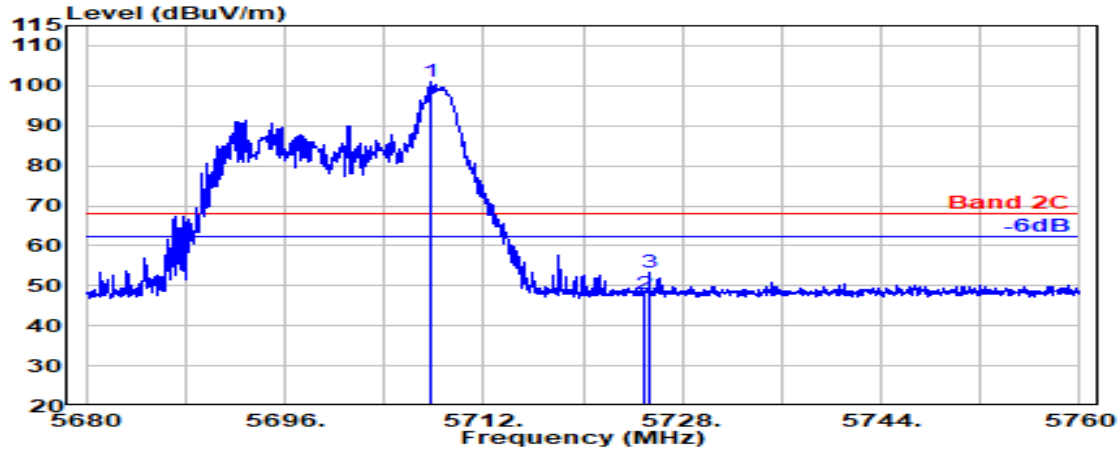

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.700	34.42	8.87	39.29	97.00	100.99	---	---	Peak
5725.000	34.45	8.88	39.29	43.96	48.00	68.20	20.20	Peak
5725.300	34.45	8.88	39.29	49.44	53.48	68.20	14.72	Peak

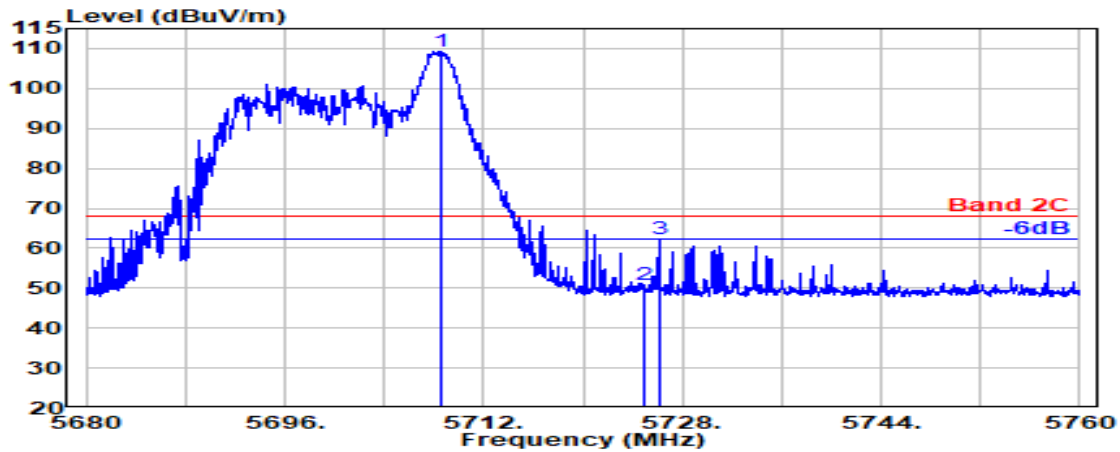


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.650	34.42	8.87	39.29	105.30	109.30	---	---	Peak
5725.000	34.45	8.88	39.29	46.86	50.90	68.20	17.30	Peak
5726.150	34.45	8.88	39.29	58.29	62.33	68.20	5.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

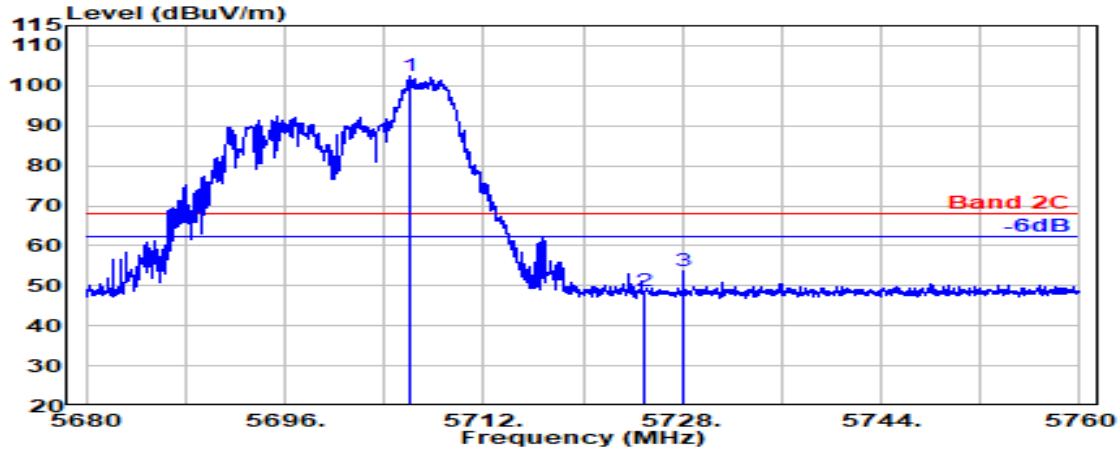

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	34.41	8.87	39.29	98.59	102.58	---	---	Peak
5725.000	34.45	8.88	39.29	44.47	48.51	68.20	19.69	Peak
5728.050	34.46	8.88	39.29	49.82	53.86	68.20	14.34	Peak

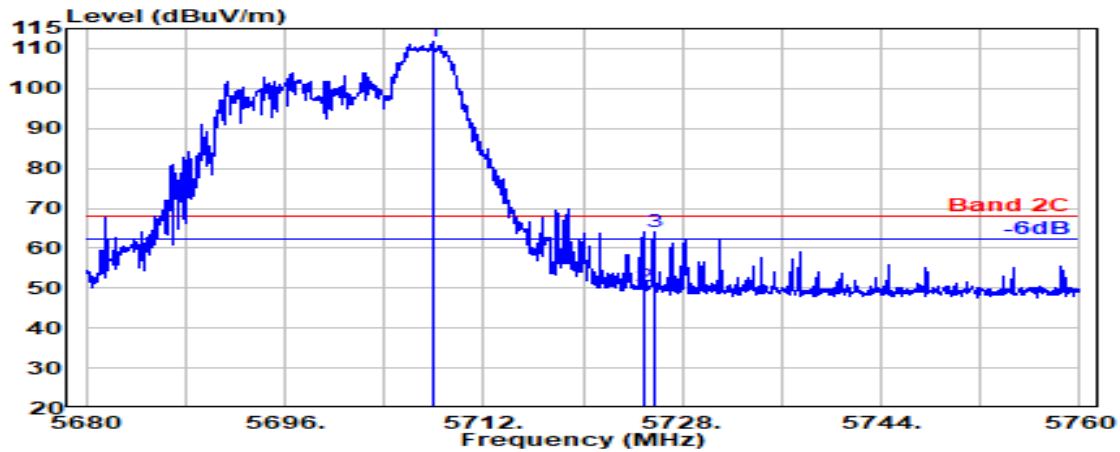


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.950	34.42	8.87	39.29	107.87	111.87	---	---	Peak
5725.000	34.45	8.88	39.29	46.51	50.55	68.20	17.65	Peak
5725.700	34.45	8.88	39.29	59.90	63.94	68.20	4.26	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

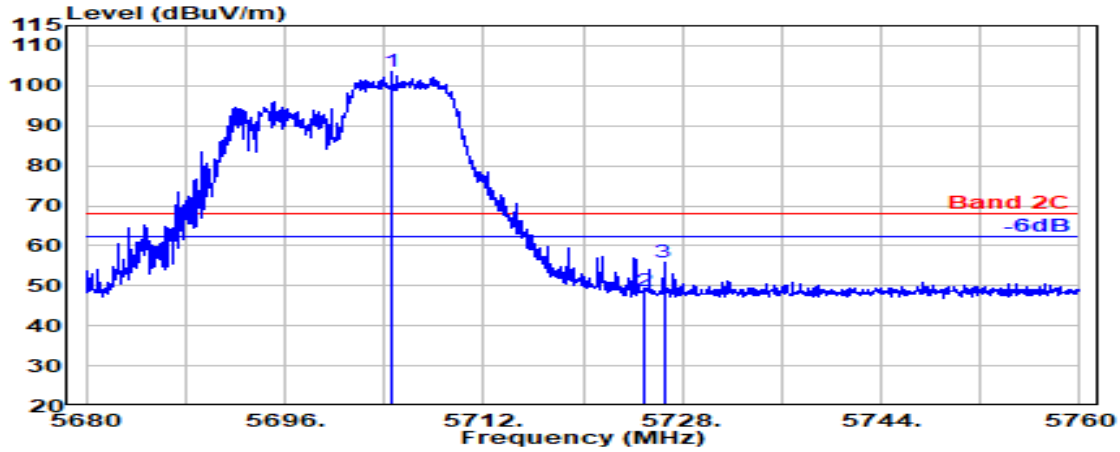

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.550	34.41	8.87	39.29	99.37	103.36	---	---	Peak
5725.000	34.45	8.88	39.29	44.59	48.63	68.20	19.57	Peak
5726.500	34.45	8.88	39.29	51.81	55.86	68.20	12.34	Peak

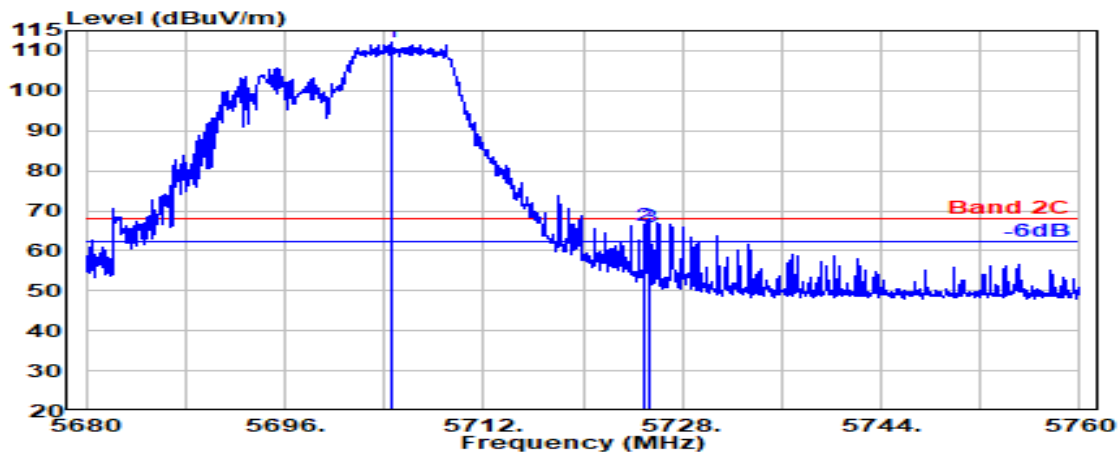


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.700	34.41	8.87	39.29	108.30	112.29	---	---	Peak
5725.000	34.45	8.88	39.29	62.19	66.23	68.20	1.97	Peak
5725.300	34.45	8.88	39.29	62.01	66.05	68.20	2.15	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

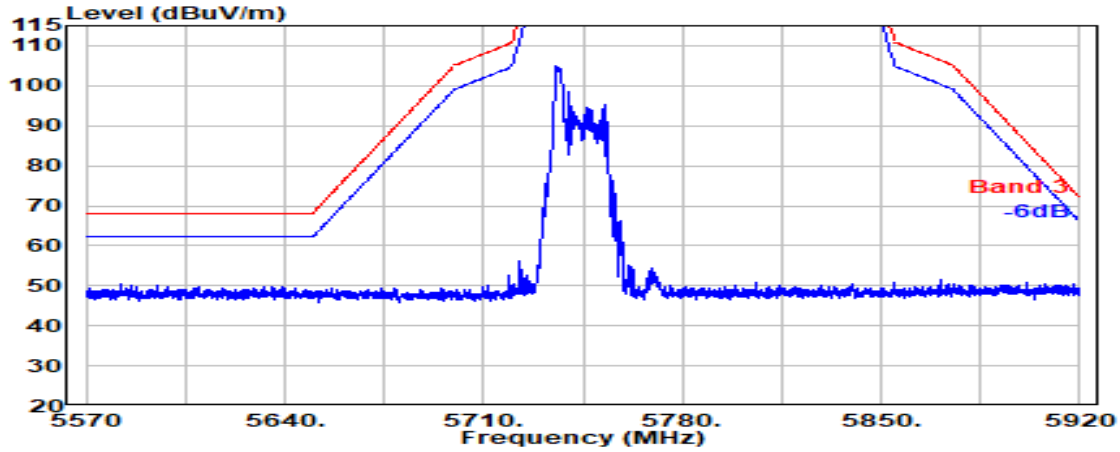


Antenna at Vertical Polarization

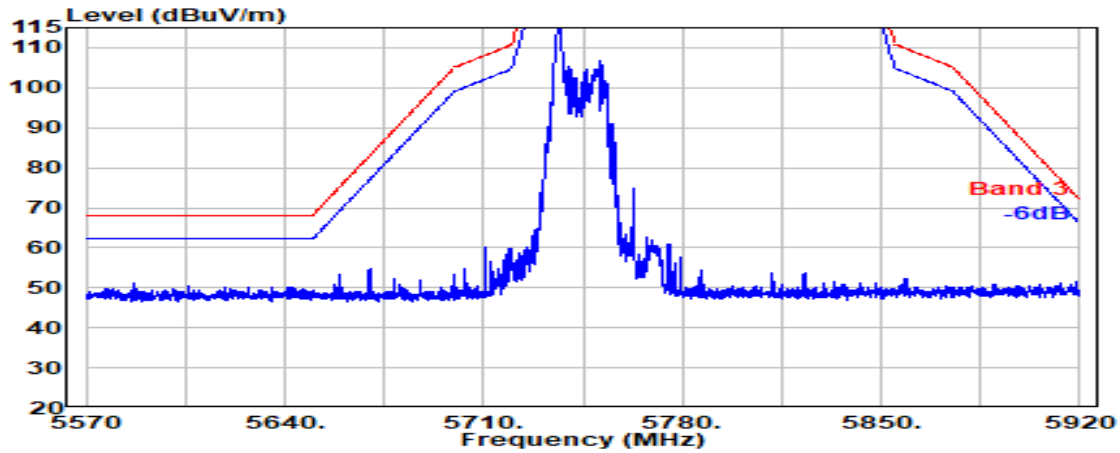


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

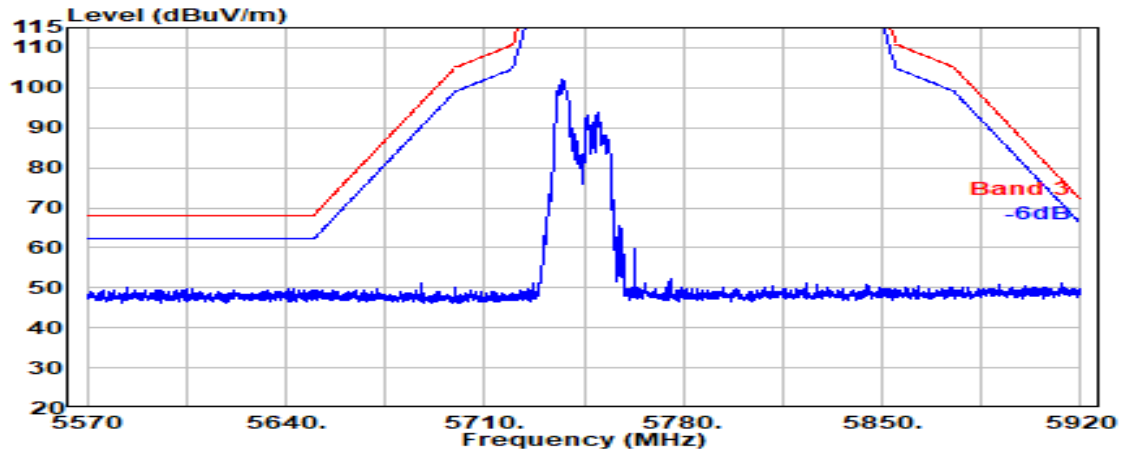


## Antenna at Vertical Polarization

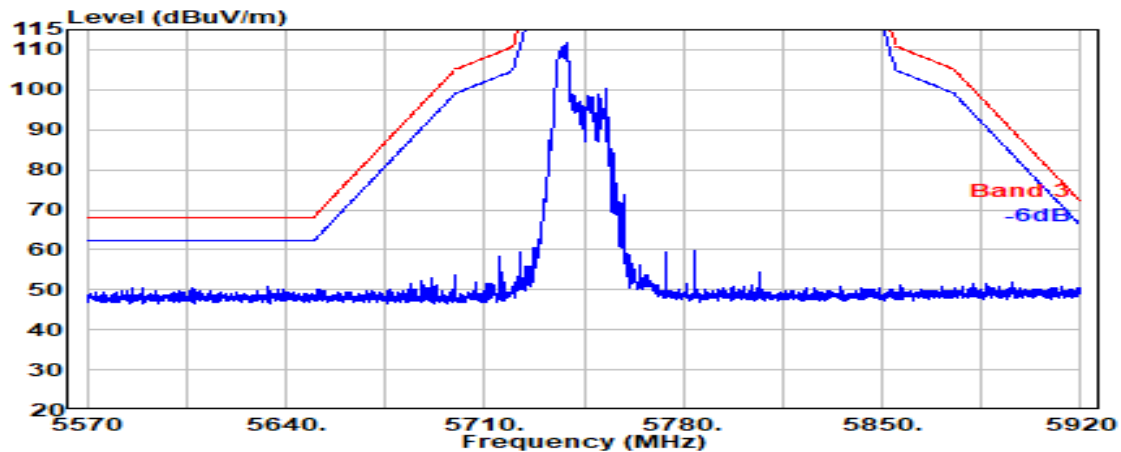




Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

#### Antenna at Horizontal Polarization

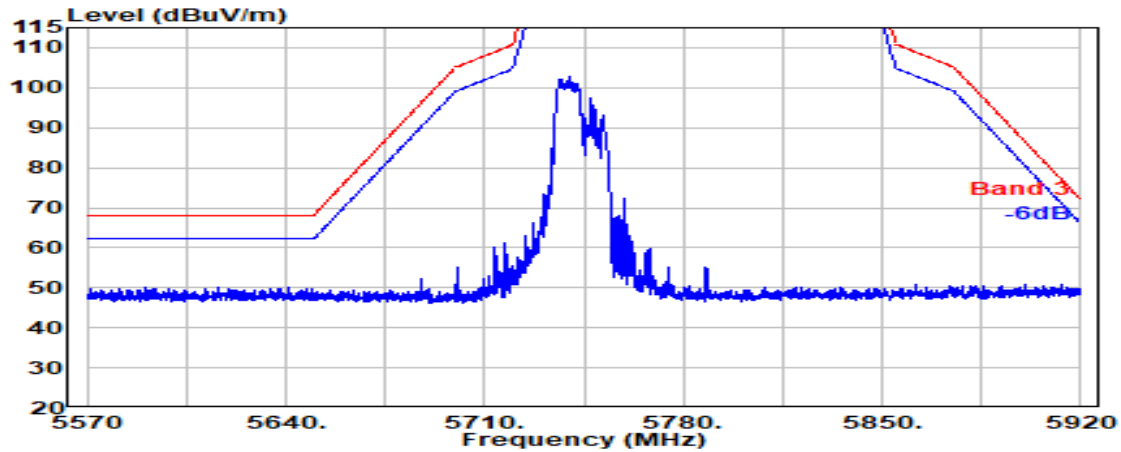


#### Antenna at Vertical Polarization

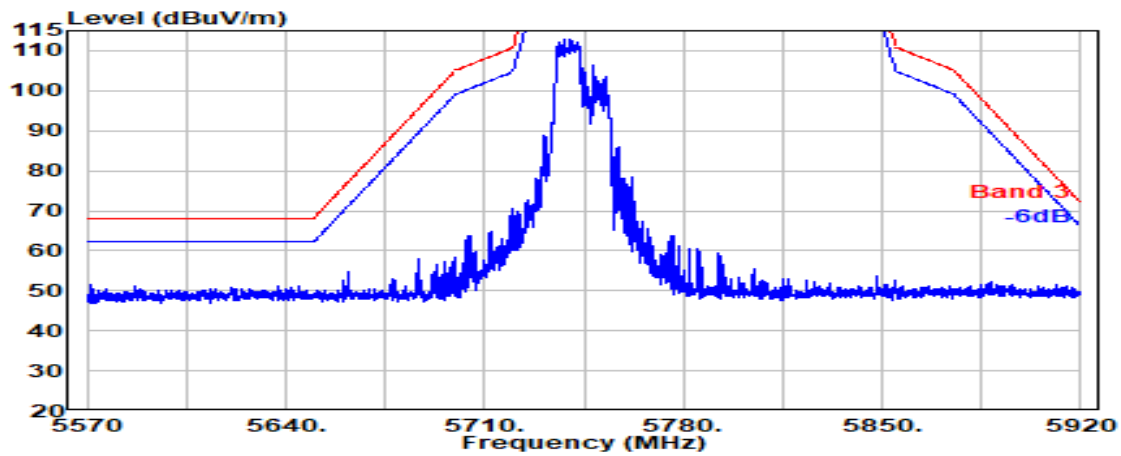


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

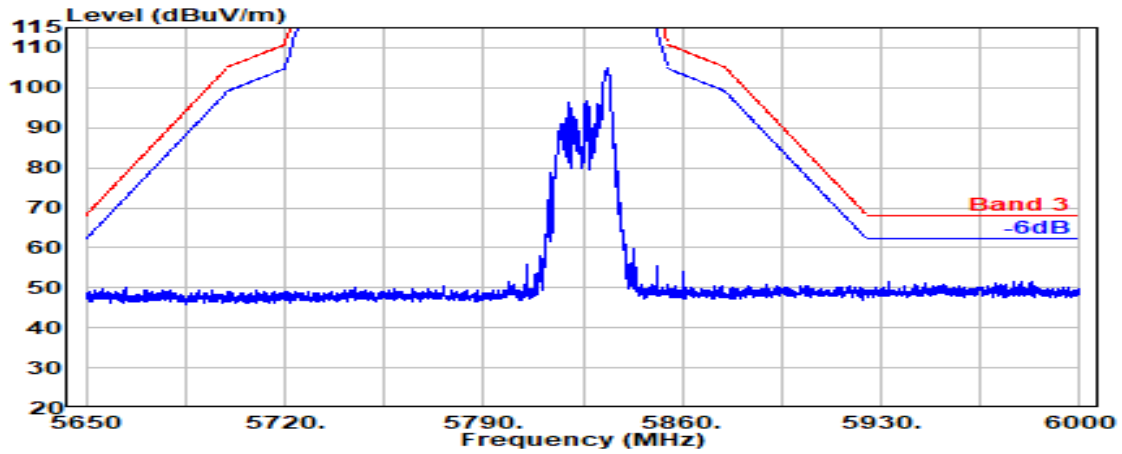


Antenna at Vertical Polarization

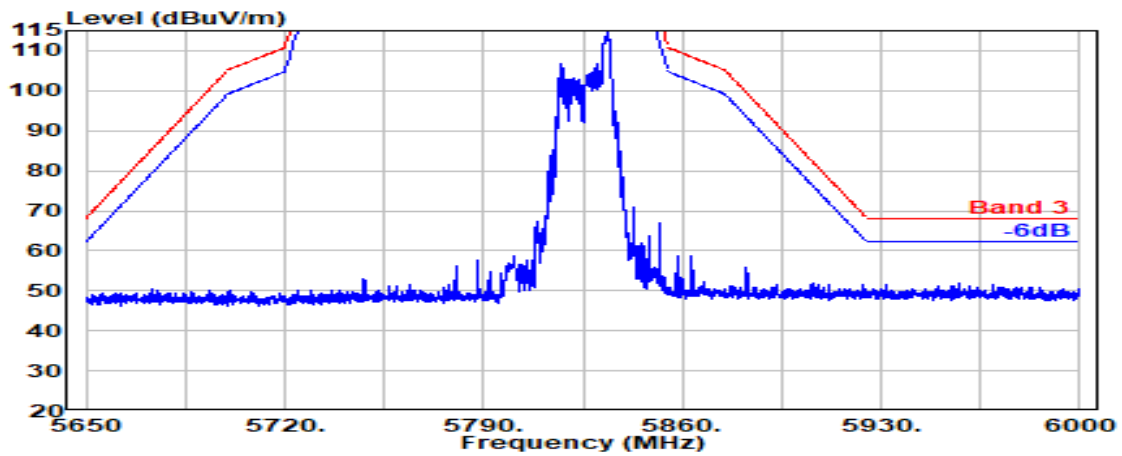


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

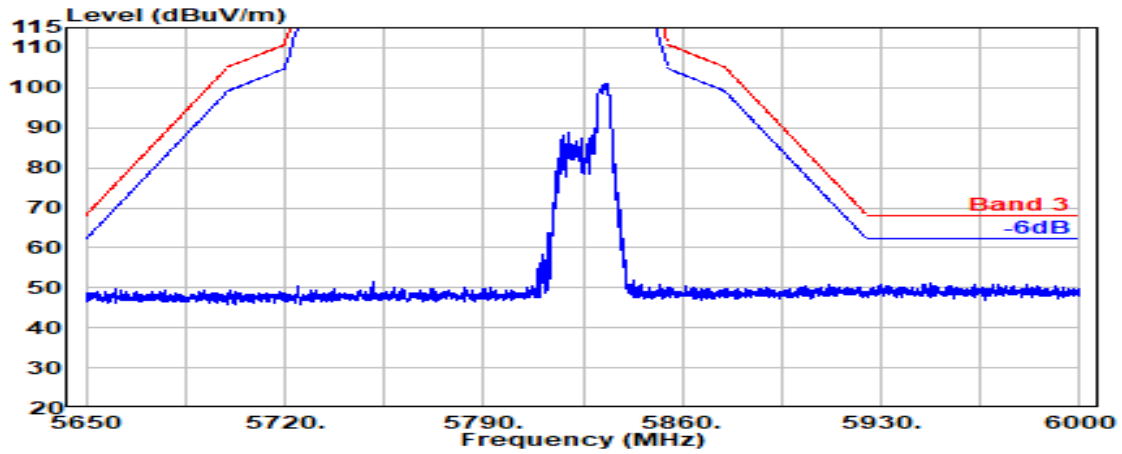


Antenna at Vertical Polarization

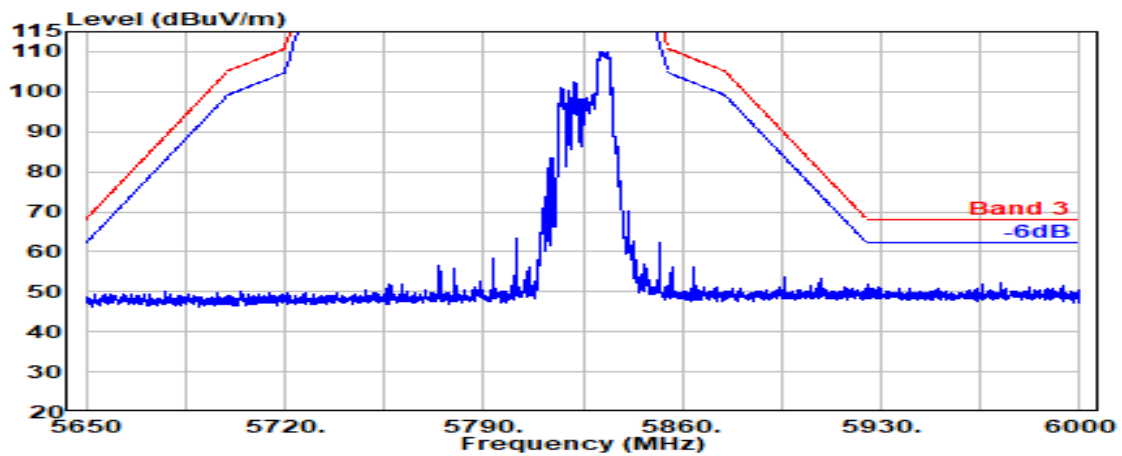


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


#### Antenna at Horizontal Polarization

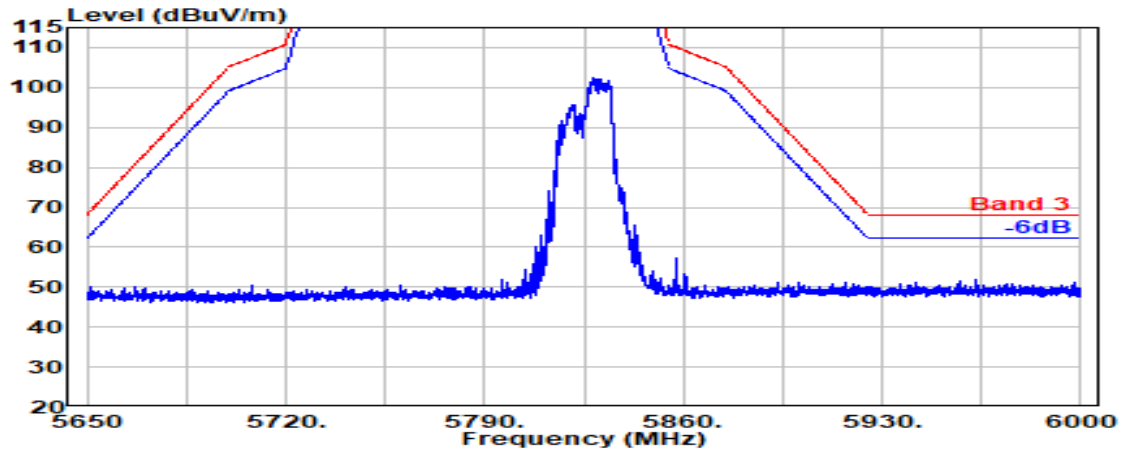

#### Antenna at Vertical Polarization

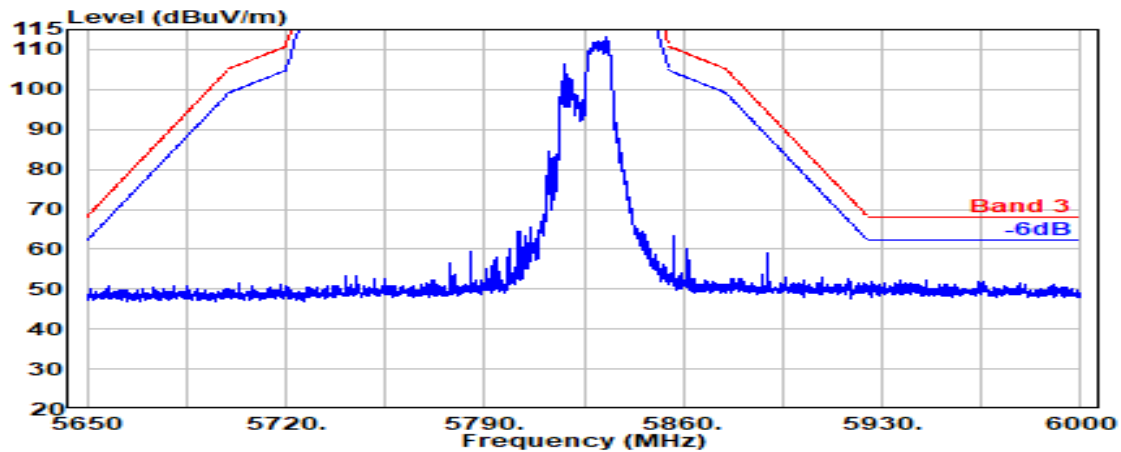


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

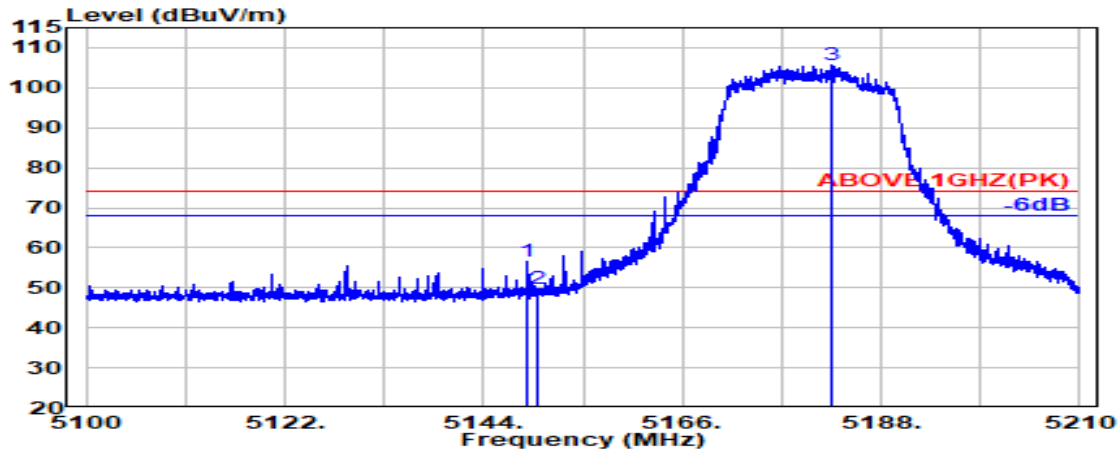

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.903	34.20	8.54	39.27	53.19	56.65	74.00	17.35	Peak
5150.000	34.20	8.54	39.27	46.27	49.74	74.00	24.26	Peak
@ 5182.469	34.27	8.56	39.27	101.98	105.54	---	---	Peak

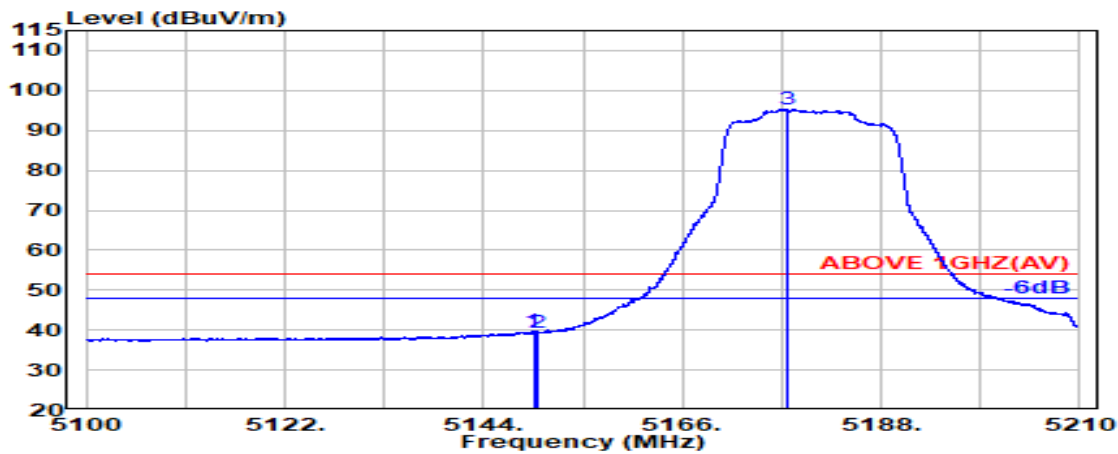


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.531	34.20	8.54	39.27	36.19	39.66	54.00	14.34	Average
5150.000	34.20	8.54	39.27	35.89	39.37	54.00	14.63	Average
@ 5177.534	34.26	8.56	39.27	91.65	95.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

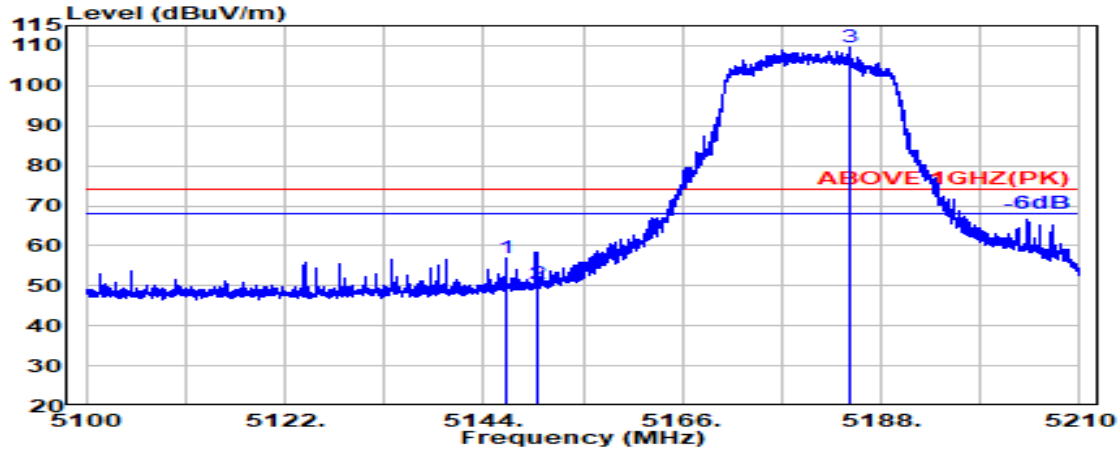

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.577	34.19	8.54	39.27	53.36	56.82	74.00	17.18	Peak
5150.000	34.20	8.54	39.27	47.09	50.57	74.00	23.43	Peak
@ 5184.637	34.27	8.57	39.27	106.03	109.60	---	---	Peak

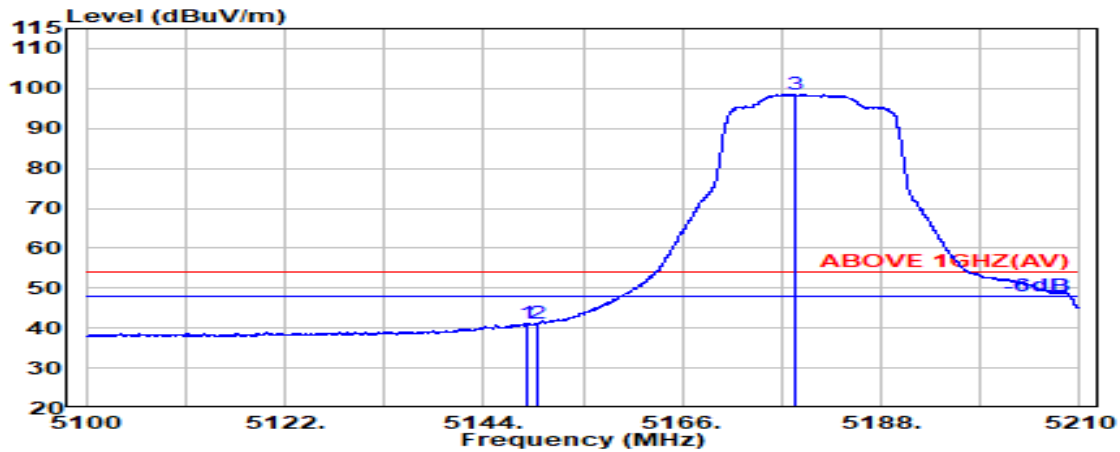


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	34.20	8.54	39.27	37.82	41.29	54.00	12.71	Average
5150.000	34.20	8.54	39.27	37.65	41.12	54.00	12.88	Average
@ 5178.446	34.26	8.56	39.27	95.01	98.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

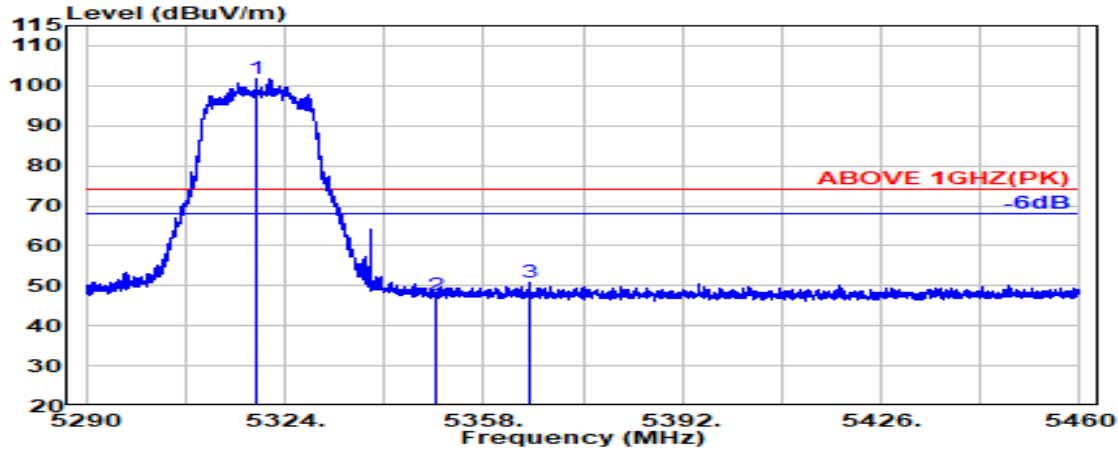

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.143	34.56	8.65	39.26	97.93	101.87	---	---	Peak
5350.000	34.50	8.67	39.26	43.71	47.62	74.00	26.38	Peak
5365.820	34.53	8.67	39.26	46.99	50.94	74.00	23.06	Peak

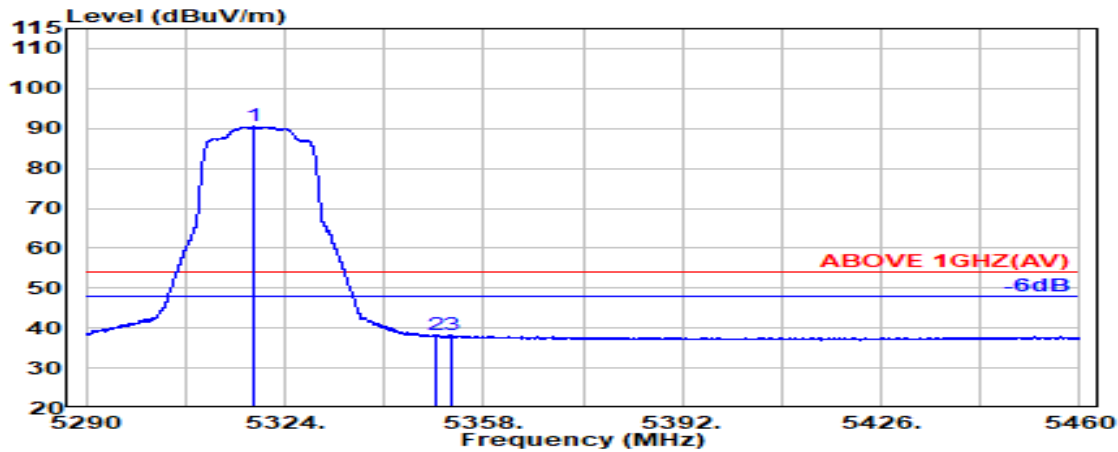


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.657	34.56	8.65	39.26	86.56	90.51	---	---	Average
5350.000	34.50	8.67	39.26	34.25	38.15	54.00	15.85	Average
5352.511	34.51	8.67	39.26	34.47	38.39	54.00	15.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

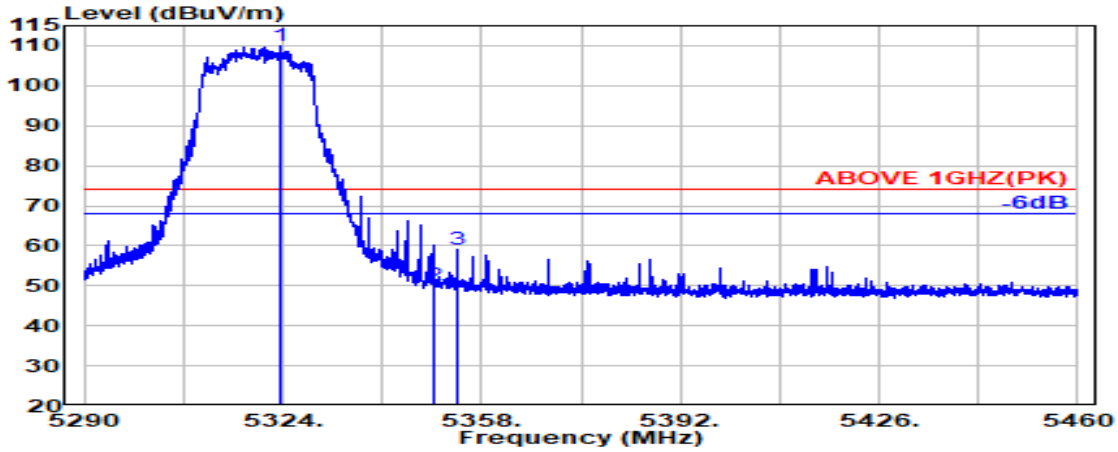

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.563	34.55	8.65	39.26	105.93	109.87	---	---	Peak
5350.000	34.50	8.67	39.26	46.29	50.19	74.00	23.81	Peak
5353.726	34.51	8.67	39.26	55.10	59.02	74.00	14.98	Peak

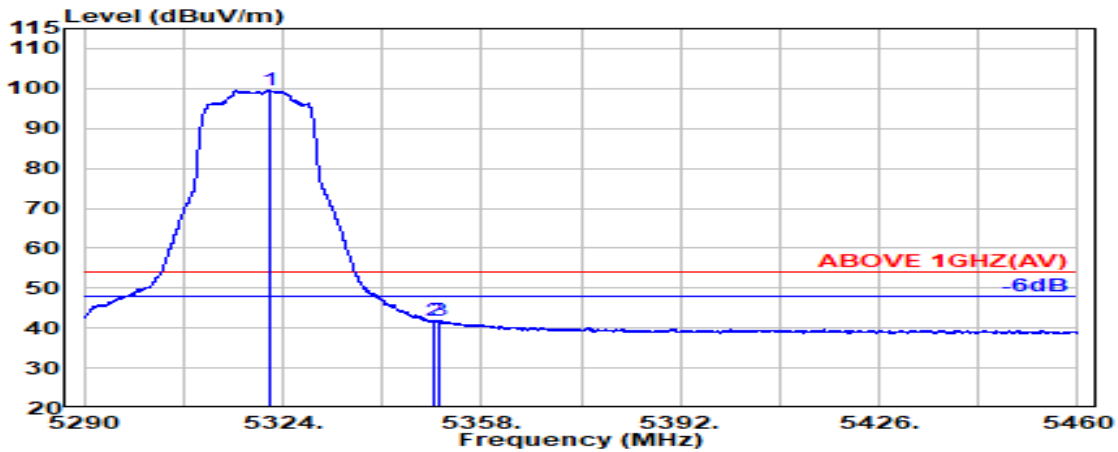


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.620	34.56	8.65	39.26	95.66	99.61	---	---	Average
5350.000	34.50	8.67	39.26	37.79	41.70	54.00	12.30	Average
5350.666	34.50	8.67	39.26	37.93	41.84	54.00	12.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

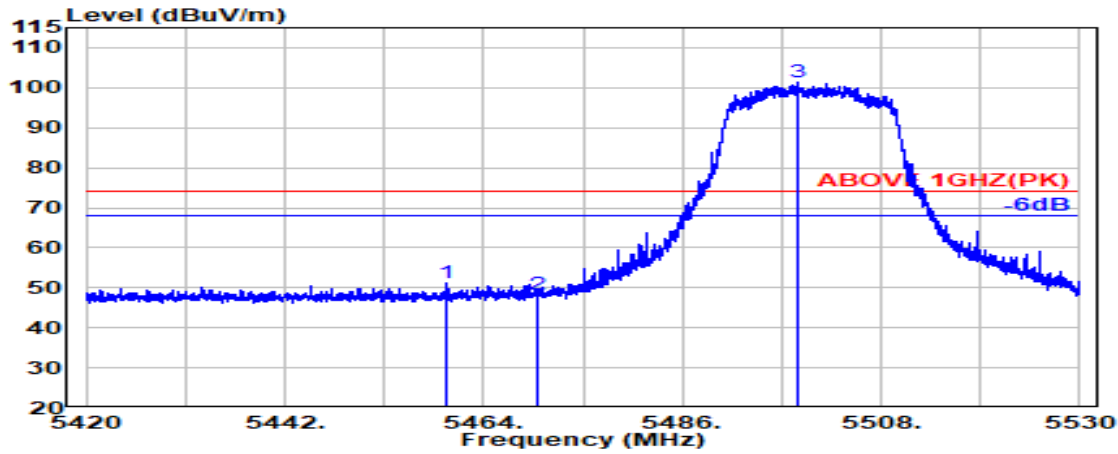

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.789	34.74	8.73	39.25	47.15	51.37	74.00	22.63	Peak
5470.000	34.78	8.74	39.25	44.06	48.32	74.00	25.68	Peak
@ 5498.666	34.89	8.75	39.25	96.91	101.31	---	---	Peak

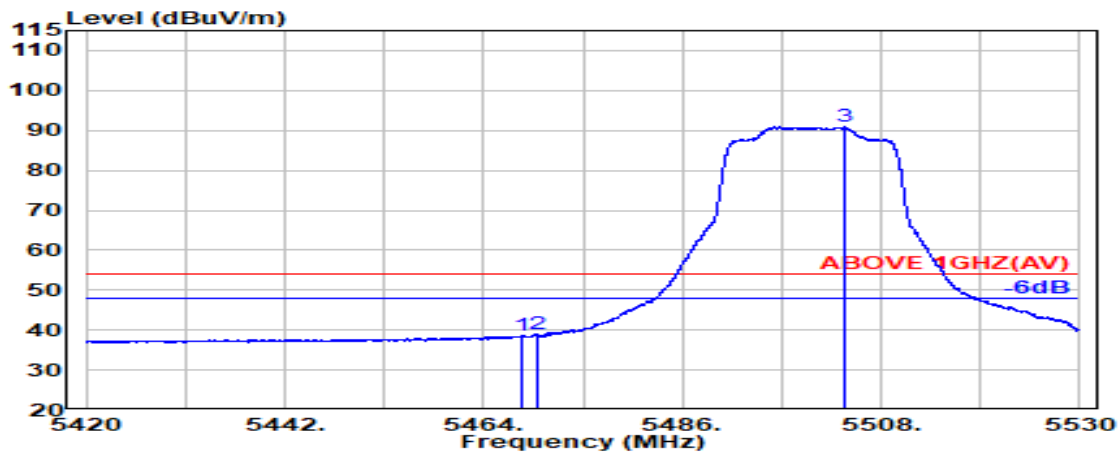


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.274	34.77	8.73	39.25	34.34	38.60	54.00	15.40	Average
5470.000	34.78	8.74	39.25	34.62	38.88	54.00	15.12	Average
@ 5504.009	34.89	8.76	39.25	86.56	90.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

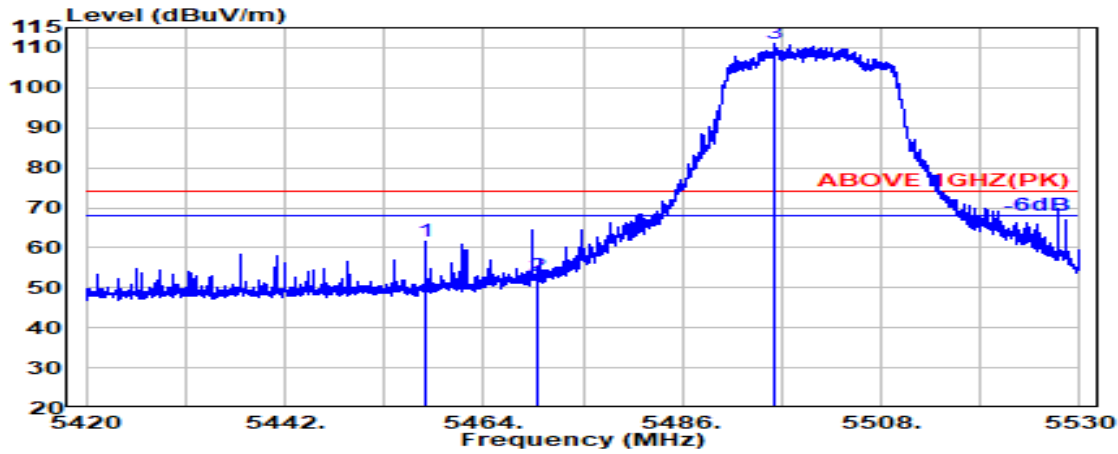

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.526	34.73	8.73	39.25	57.26	61.47	74.00	12.53	Peak
5470.000	34.78	8.74	39.25	48.60	52.86	74.00	21.14	Peak
@ 5496.214	34.88	8.75	39.25	106.77	111.15	---	---	Peak

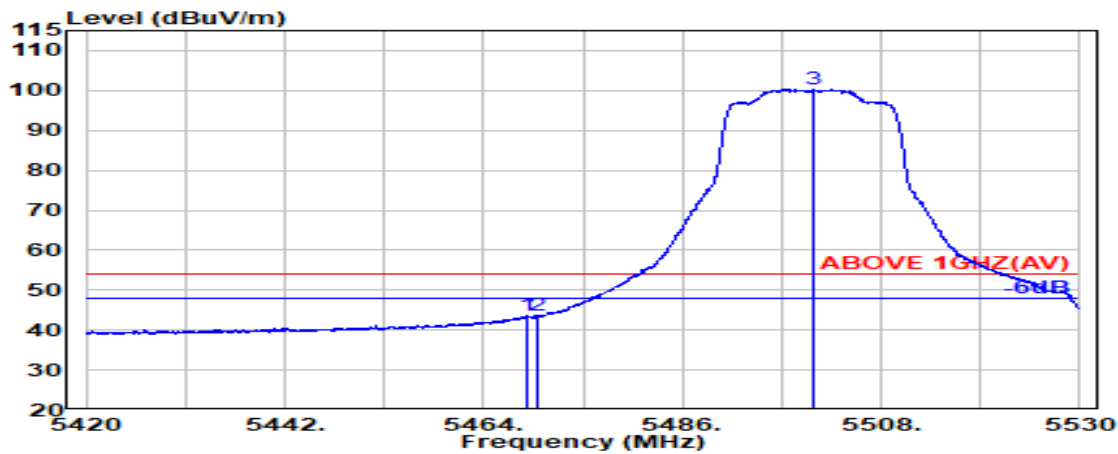


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.934	34.78	8.74	39.25	39.23	43.49	54.00	10.51	Average
5470.000	34.78	8.74	39.25	39.28	43.55	54.00	10.45	Average
@ 5500.583	34.90	8.75	39.25	95.85	100.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

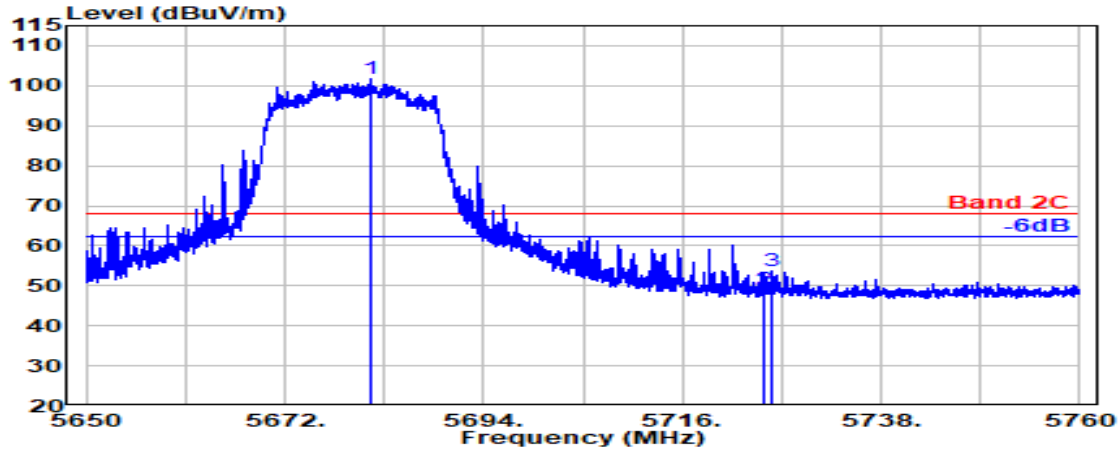

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5681.491	34.47	8.86	39.28	97.59	101.64	---	---	Peak
5725.000	34.45	8.88	39.29	45.04	49.08	68.20	19.12	Peak
5725.900	34.45	8.88	39.29	49.78	53.82	68.20	14.38	Peak

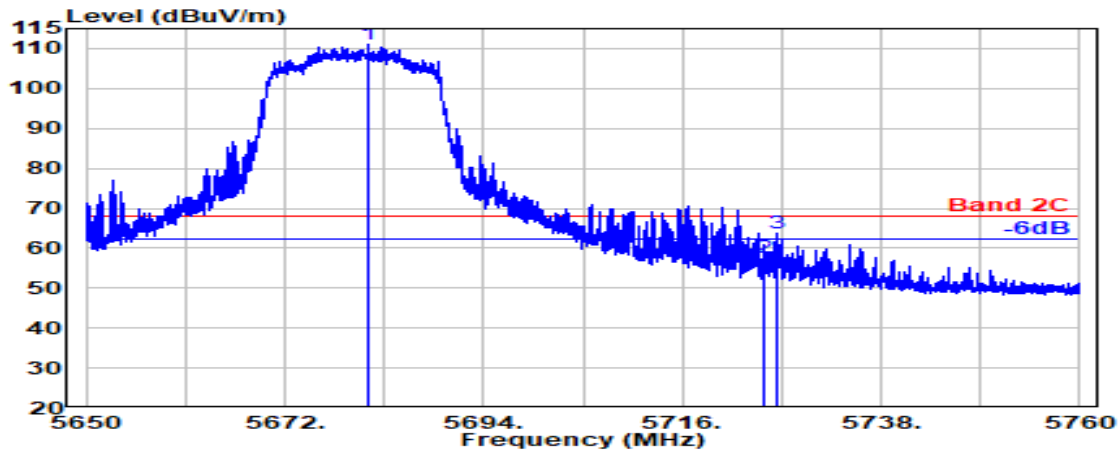


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5681.146	34.48	8.86	39.28	106.90	110.95	---	---	Peak
5725.000	34.45	8.88	39.29	53.47	57.51	68.20	10.69	Peak
5726.372	34.45	8.88	39.29	59.77	63.82	68.20	4.38	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

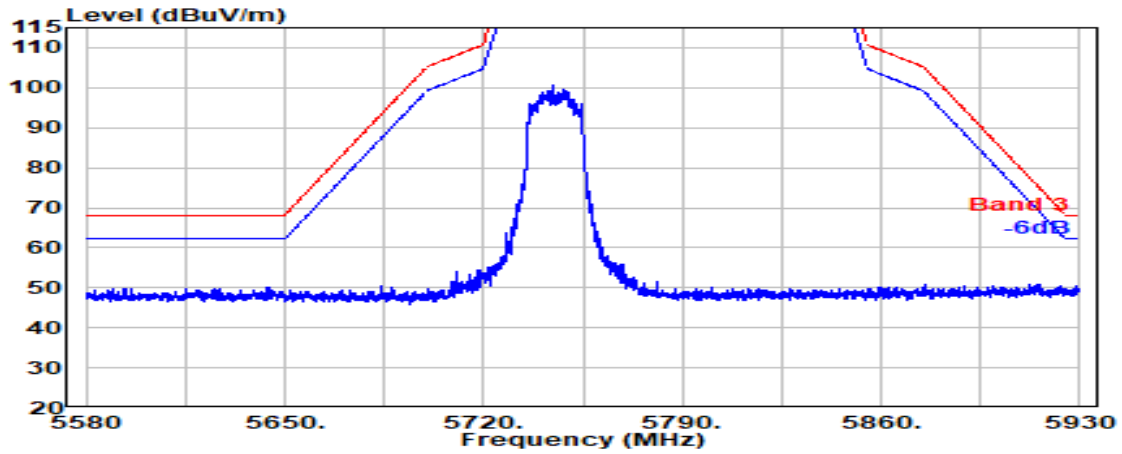


Antenna at Vertical Polarization

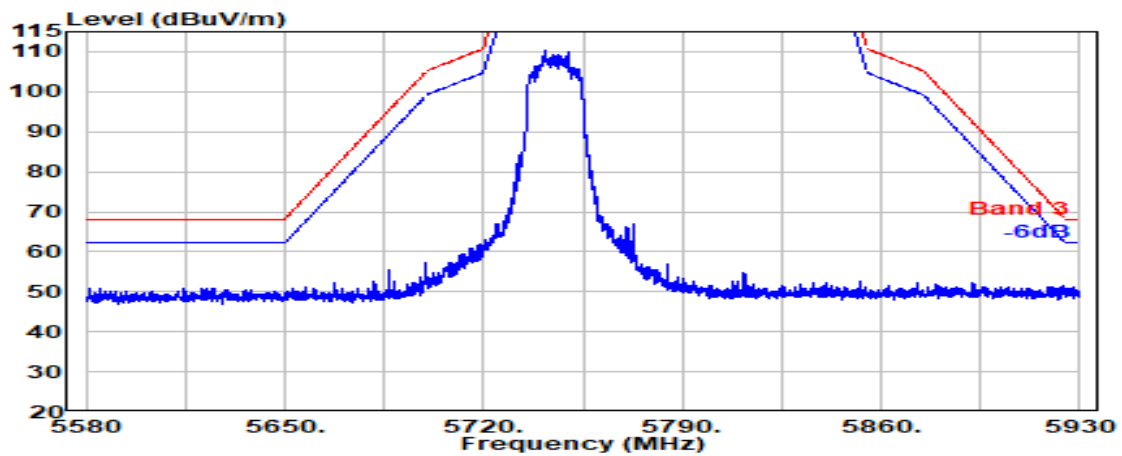


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

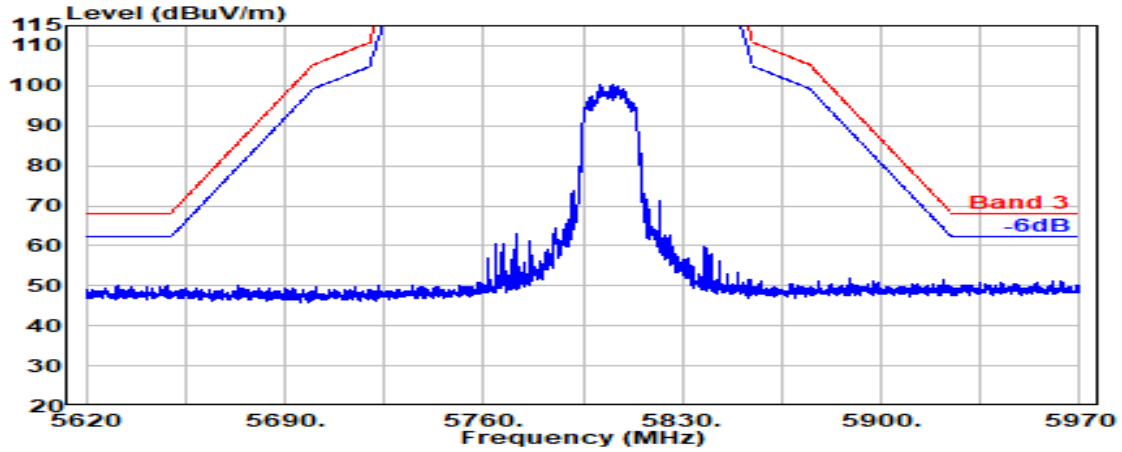

Antenna at Vertical Polarization

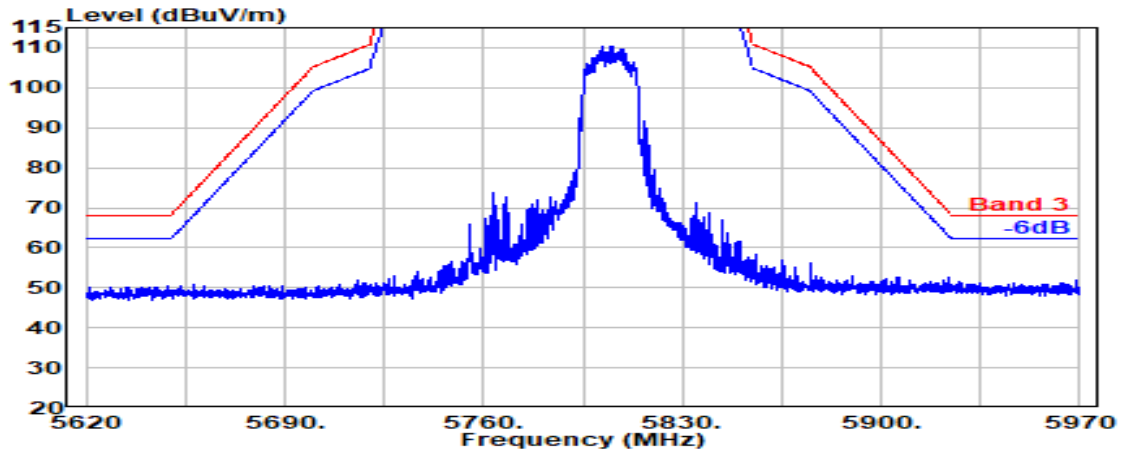


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

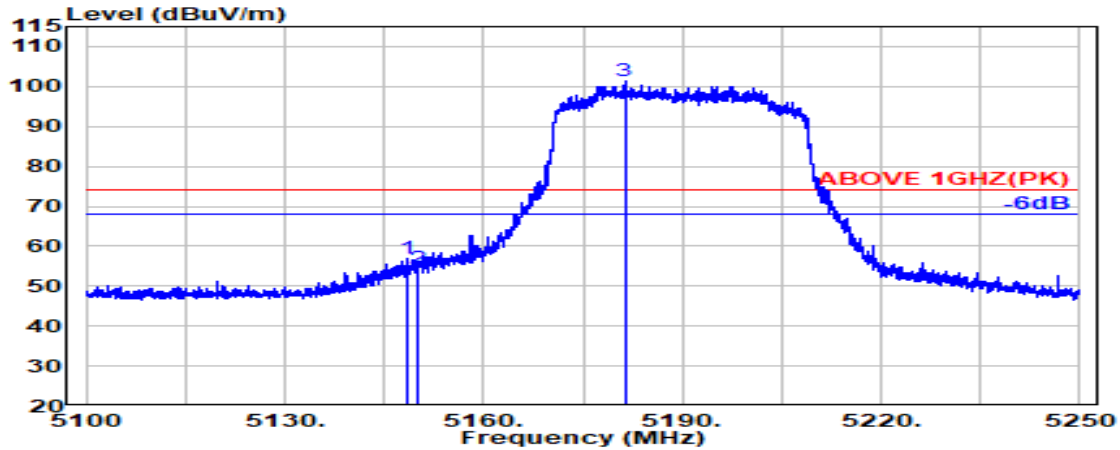

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.27	53.32	56.78	74.00	17.22	Peak
5150.000	34.20	8.54	39.27	50.84	54.32	74.00	19.68	Peak
@ 5181.300	34.26	8.56	39.27	97.76	101.31	---	---	Peak

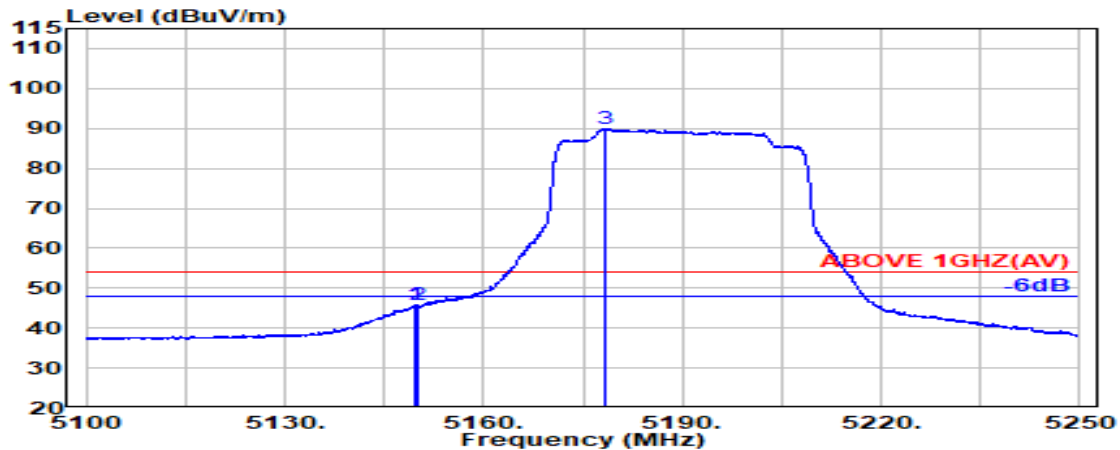


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.671	34.20	8.54	39.27	42.33	45.81	54.00	8.19	Average
5150.000	34.20	8.54	39.27	42.23	45.70	54.00	8.30	Average
@ 5178.343	34.26	8.56	39.27	86.48	90.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

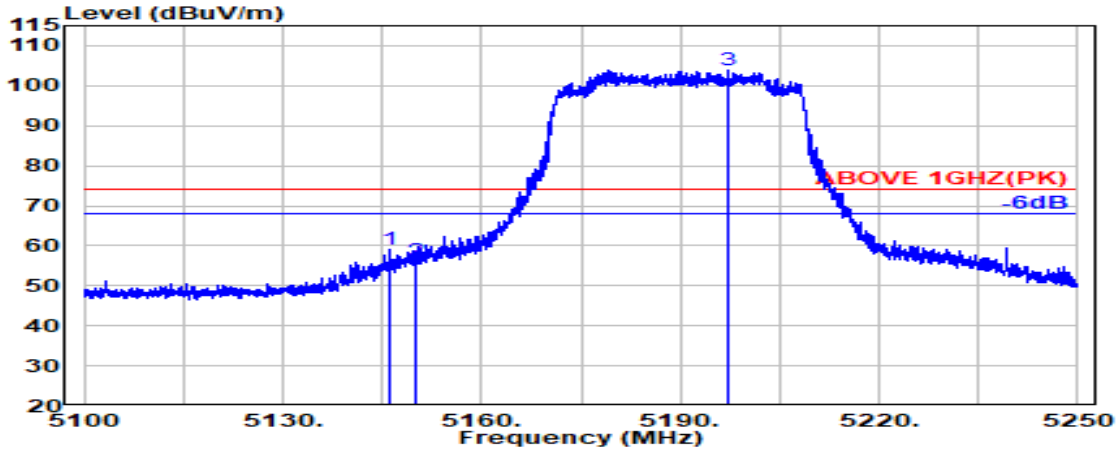

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.029	34.18	8.54	39.27	55.77	59.23	74.00	14.77	Peak
5150.000	34.20	8.54	39.27	52.89	56.36	74.00	17.64	Peak
@ 5197.157	34.29	8.57	39.27	100.43	104.03	---	---	Peak

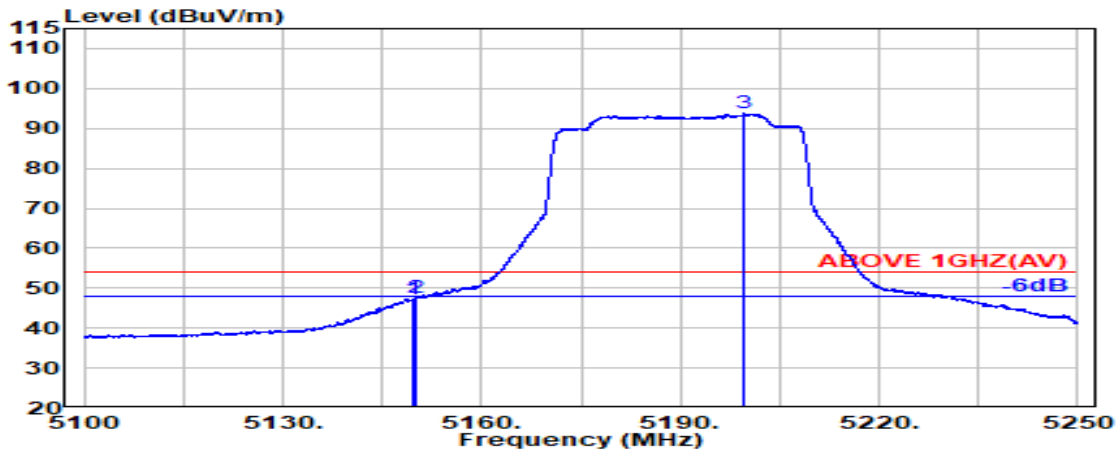


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.586	34.20	8.54	39.27	43.90	47.37	54.00	6.63	Average
5150.000	34.20	8.54	39.27	44.00	47.47	54.00	6.53	Average
@ 5199.557	34.30	8.57	39.27	90.08	93.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

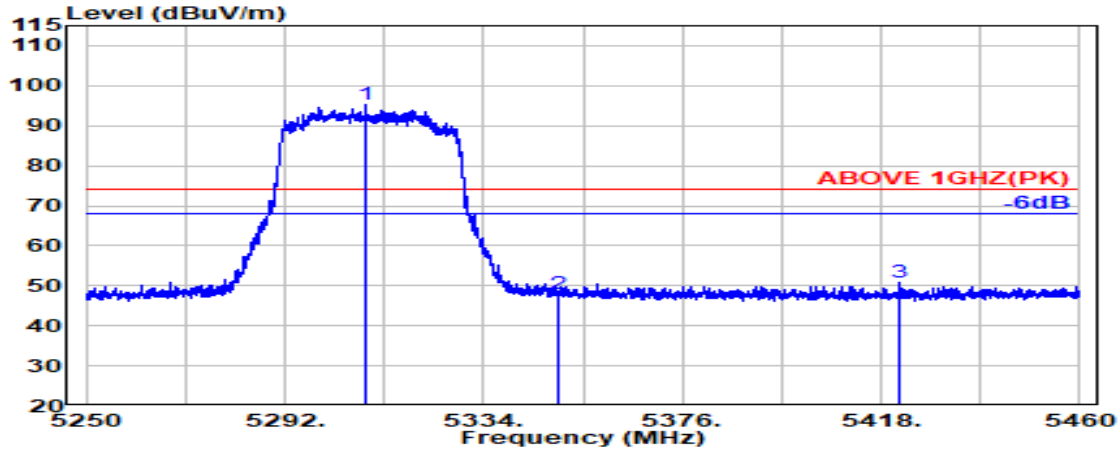

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.980	34.58	8.64	39.26	91.49	95.45	---	---	Peak
5350.000	34.50	8.67	39.26	43.96	47.87	74.00	26.13	Peak
5421.660	34.64	8.71	39.25	46.63	50.72	74.00	23.28	Peak

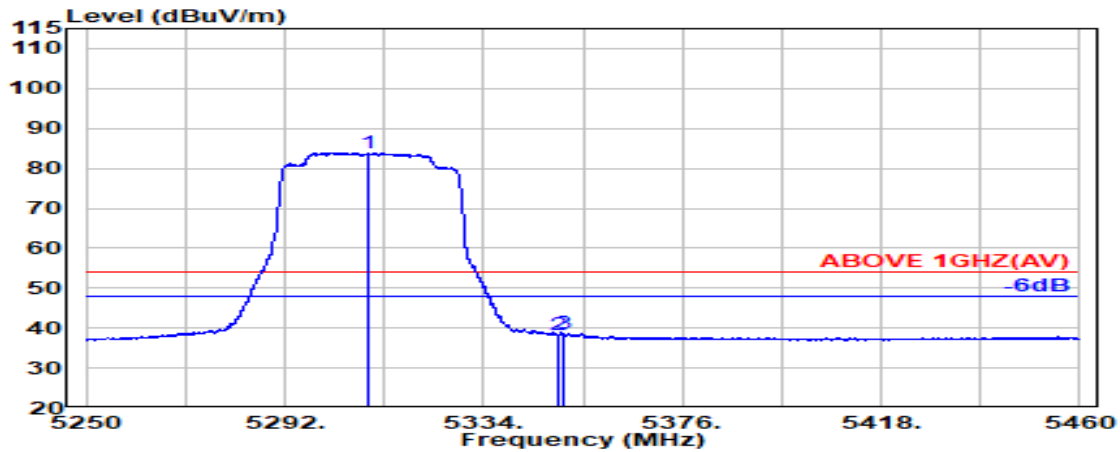


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.400	34.58	8.64	39.26	80.01	83.97	---	---	Average
5350.000	34.50	8.67	39.26	34.54	38.45	54.00	15.55	Average
5350.860	34.50	8.67	39.26	34.71	38.62	54.00	15.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

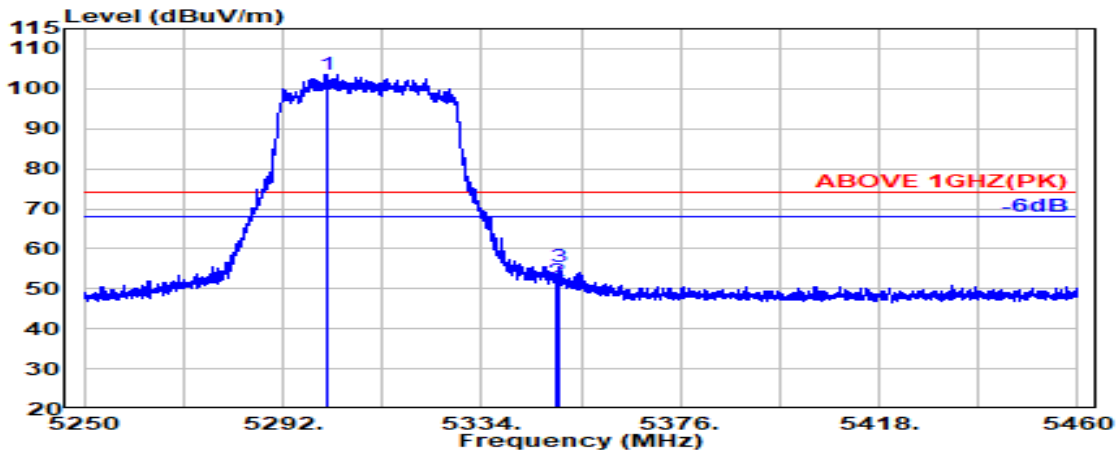

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.120	34.60	8.64	39.26	99.71	103.69	---	---	Peak
5350.000	34.50	8.67	39.26	48.17	52.07	74.00	21.93	Peak
5350.560	34.50	8.67	39.26	51.41	55.32	74.00	18.68	Peak

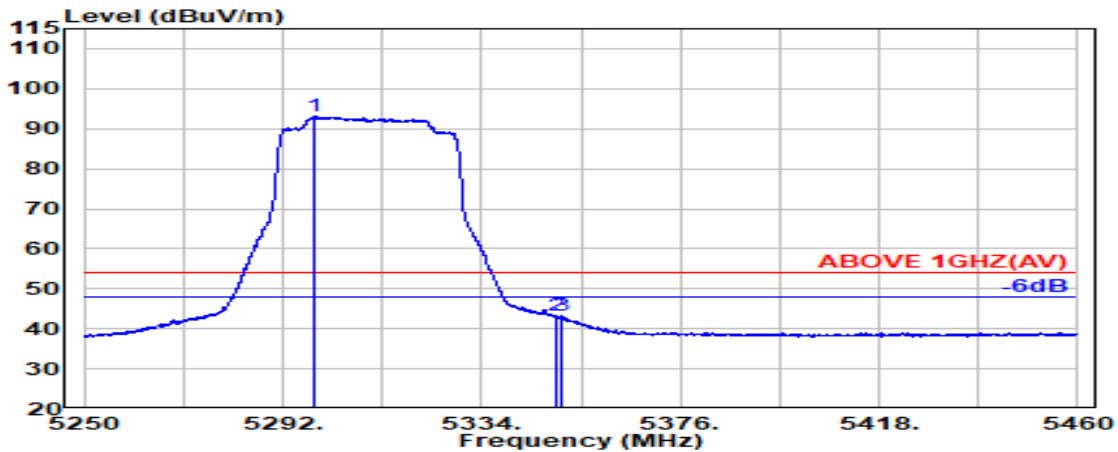


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.840	34.60	8.63	39.26	89.03	93.00	---	---	Average
5350.000	34.50	8.67	39.26	39.44	43.34	54.00	10.66	Average
5351.100	34.50	8.67	39.26	39.53	43.44	54.00	10.56	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

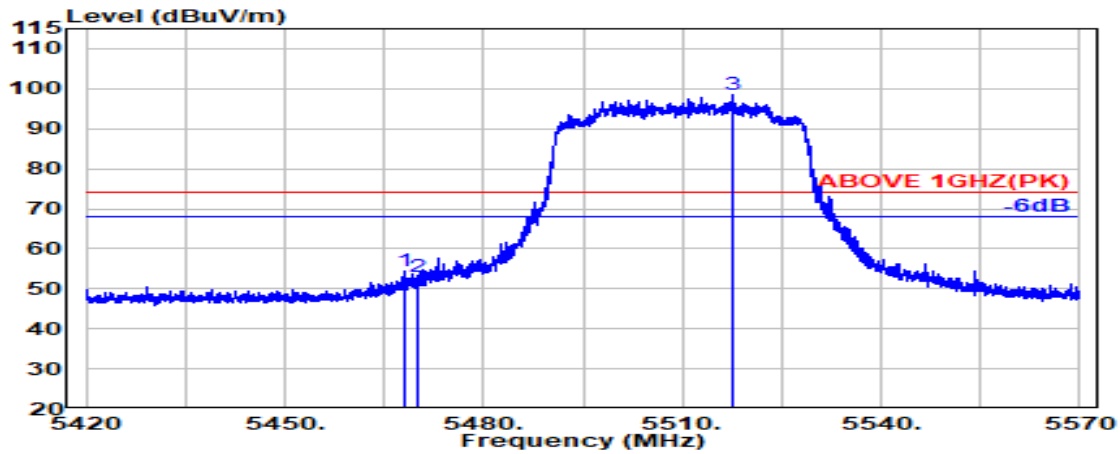

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.128	34.77	8.73	39.25	50.31	54.57	74.00	19.43	Peak
5470.000	34.78	8.74	39.25	48.69	52.95	74.00	21.05	Peak
@ 5517.457	34.86	8.76	39.25	94.04	98.42	---	---	Peak

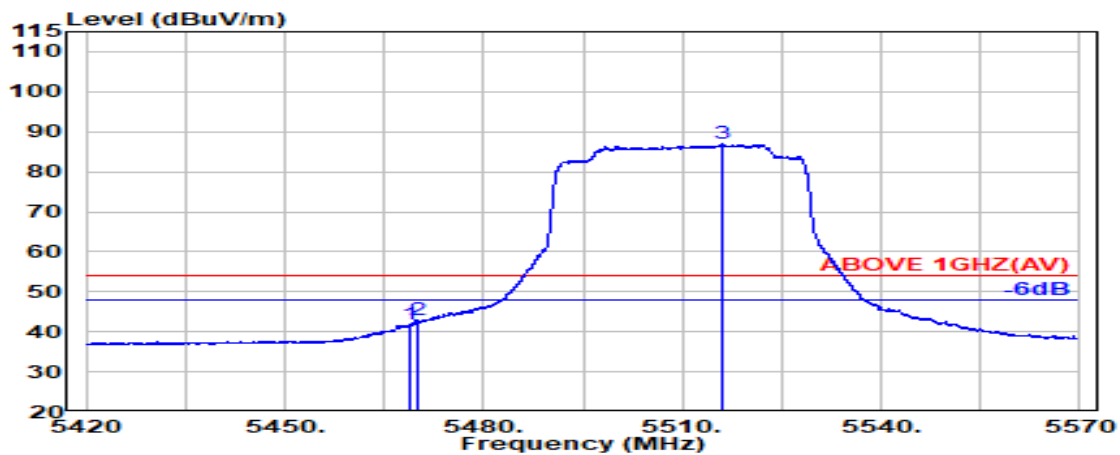


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	37.43	41.69	54.00	12.31	Average
5470.000	34.78	8.74	39.25	38.73	42.99	54.00	11.01	Average
@ 5515.872	34.87	8.76	39.25	82.55	86.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

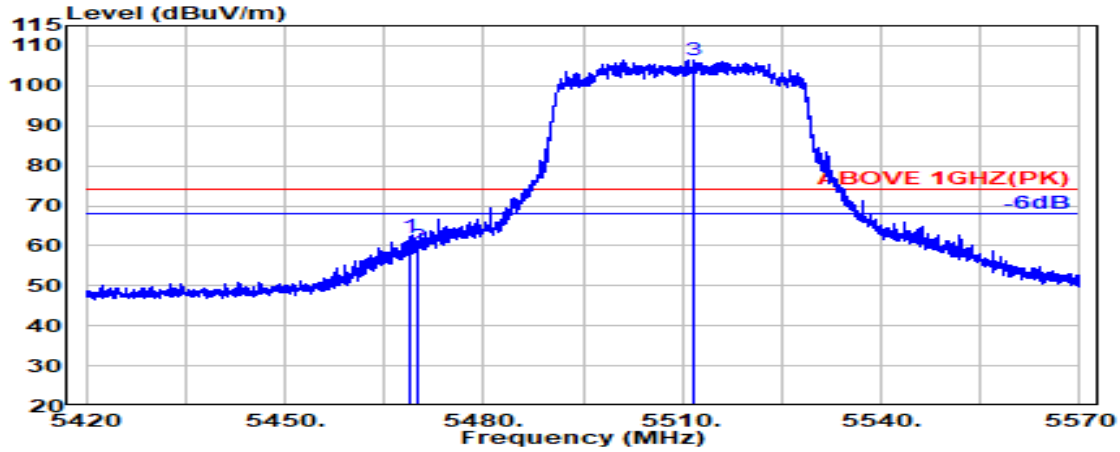

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.857	34.78	8.74	39.25	58.04	62.30	74.00	11.70	Peak
5470.000	34.78	8.74	39.25	55.54	59.81	74.00	14.19	Peak
@ 5511.886	34.88	8.76	39.25	102.09	106.47	---	---	Peak

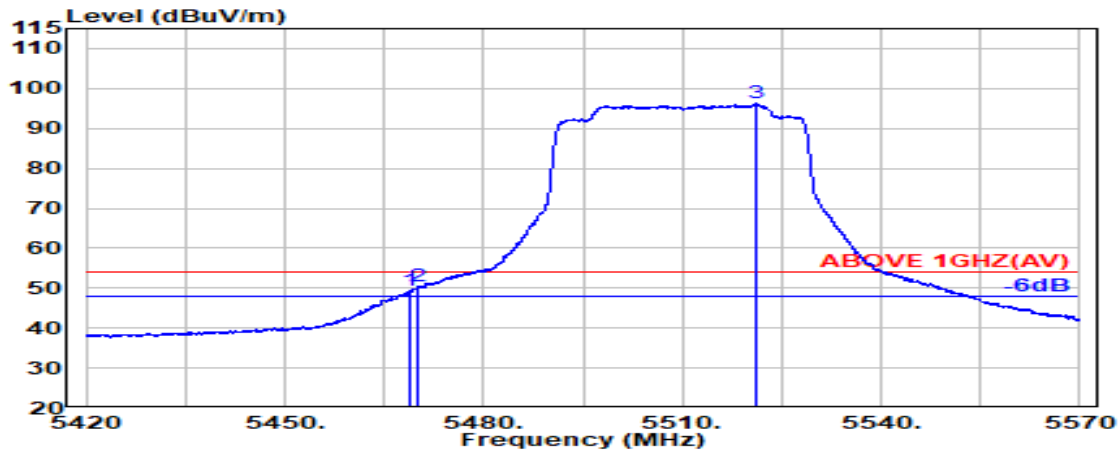


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.857	34.78	8.74	39.25	45.10	49.36	54.00	4.64	Average
5470.000	34.78	8.74	39.25	46.07	50.33	54.00	3.67	Average
@ 5520.971	34.86	8.77	39.25	91.82	96.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

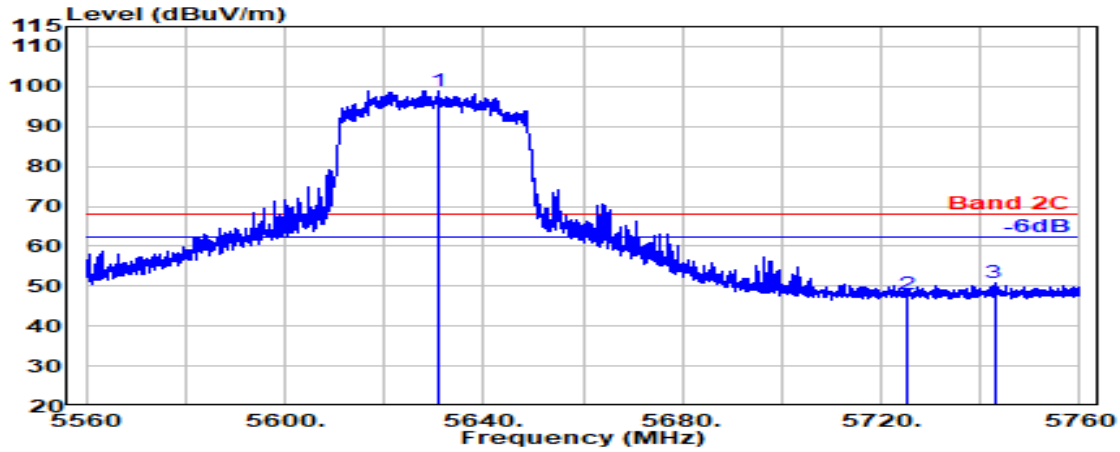

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.800	34.64	8.83	39.27	94.81	99.00	---	---	Peak
5725.000	34.45	8.88	39.29	43.80	47.84	68.20	20.36	Peak
5742.800	34.49	8.89	39.29	46.73	50.81	68.20	17.39	Peak

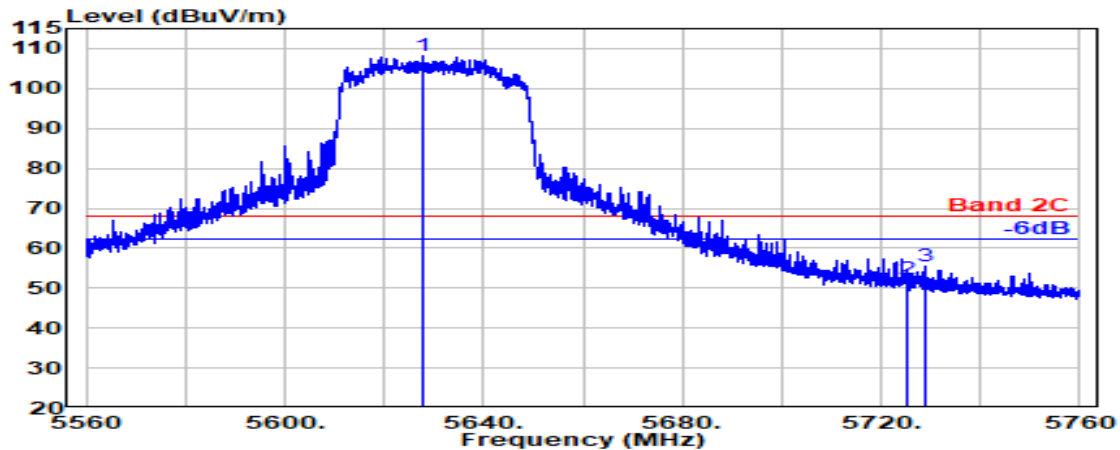


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5627.943	34.64	8.83	39.27	104.16	108.35	---	---	Peak
5725.000	34.45	8.88	39.29	48.16	52.20	68.20	16.00	Peak
5728.686	34.46	8.88	39.29	51.57	55.62	68.20	12.58	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

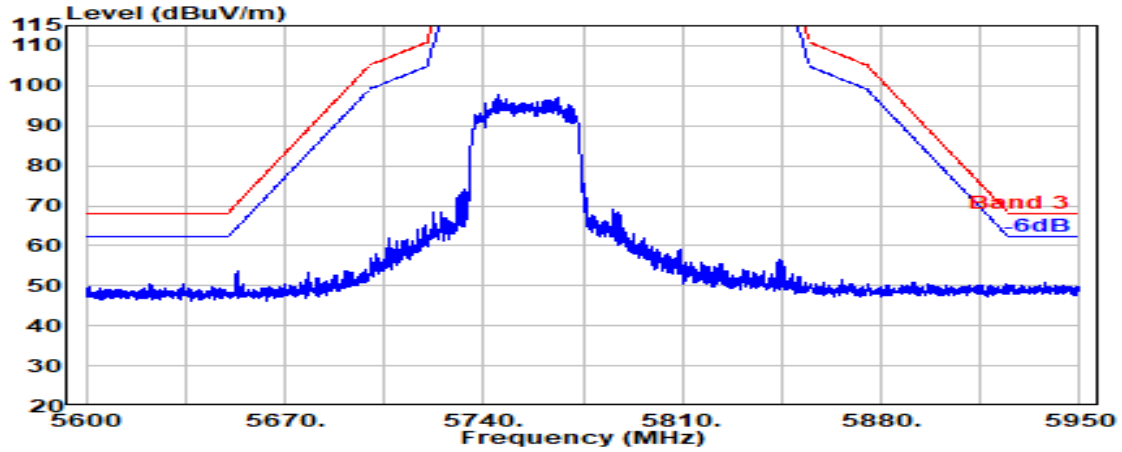


Antenna at Vertical Polarization

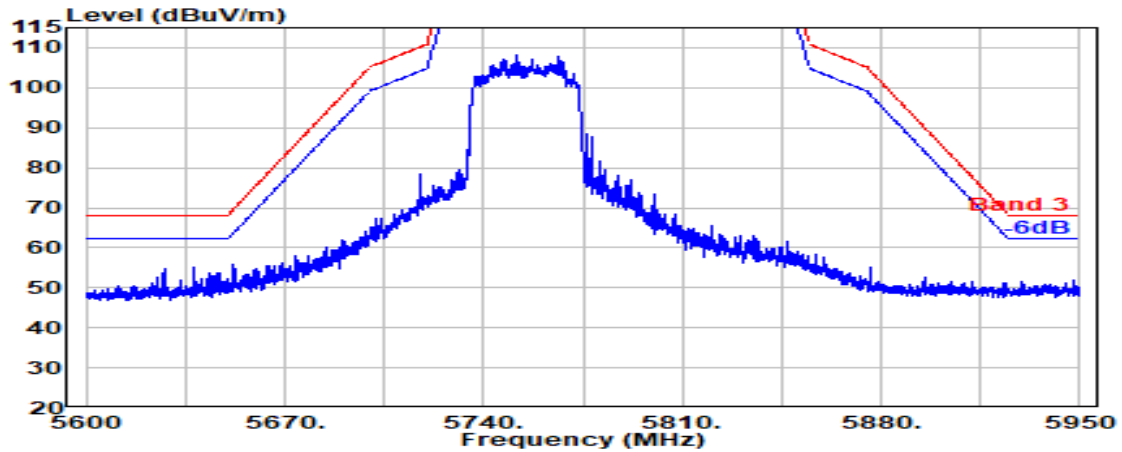


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

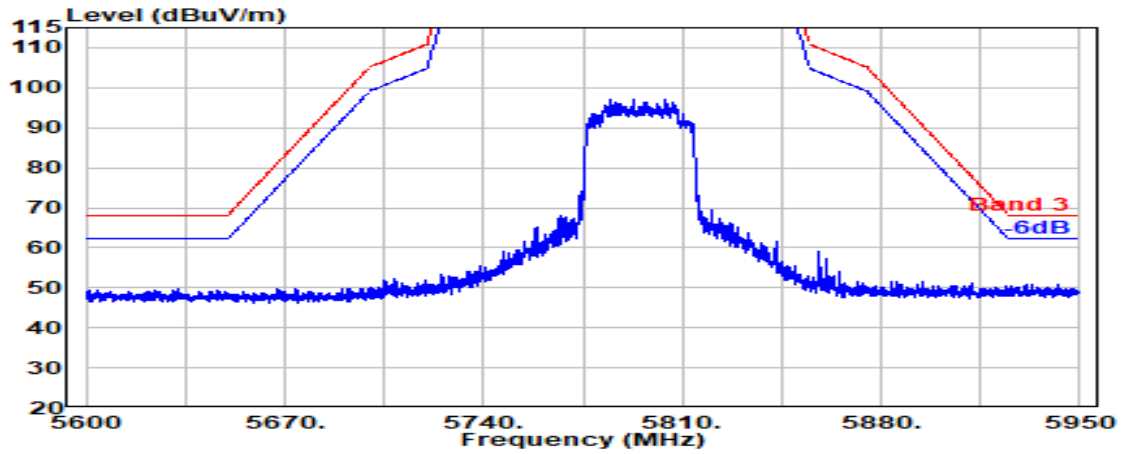

Antenna at Vertical Polarization

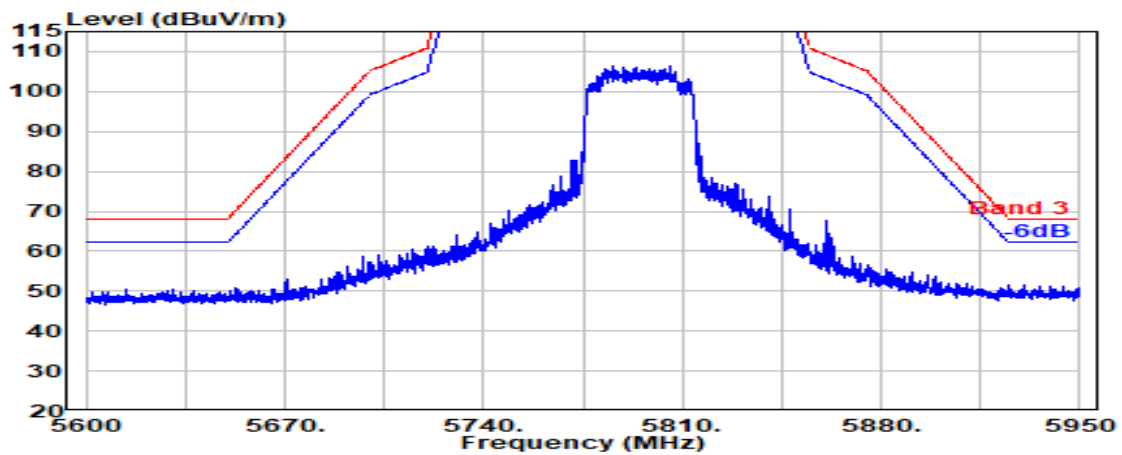


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

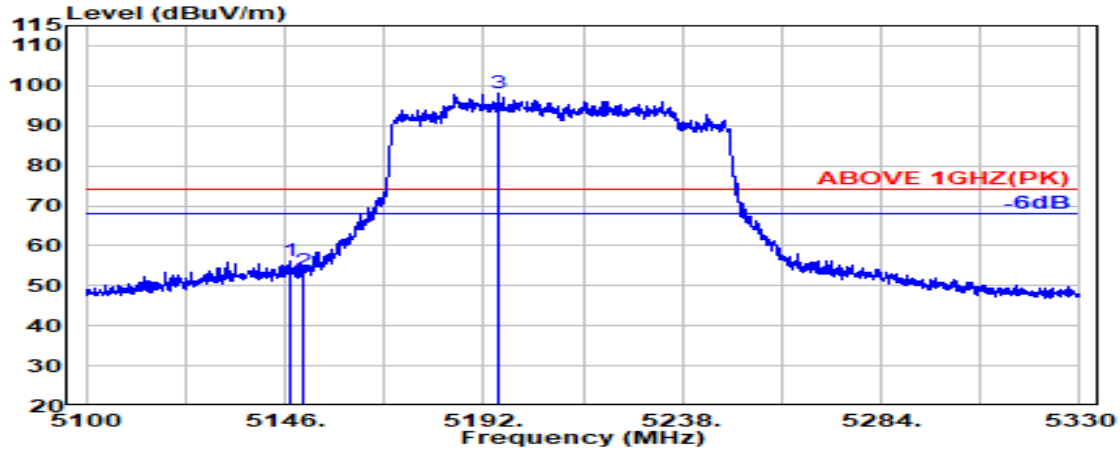

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	34.19	8.54	39.27	52.62	56.08	74.00	17.92	Peak
5150.000	34.20	8.54	39.27	50.37	53.85	74.00	20.15	Peak
@ 5195.600	34.29	8.57	39.27	94.50	98.09	---	---	Peak

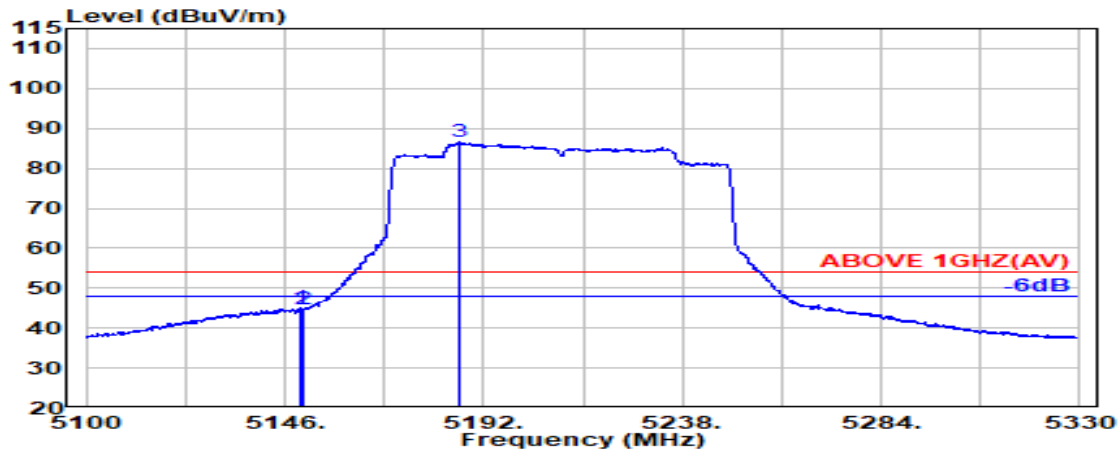


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	34.20	8.54	39.27	41.59	45.07	54.00	8.93	Average
5150.000	34.20	8.54	39.27	41.41	44.88	54.00	9.12	Average
@ 5186.200	34.27	8.57	39.27	83.00	86.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

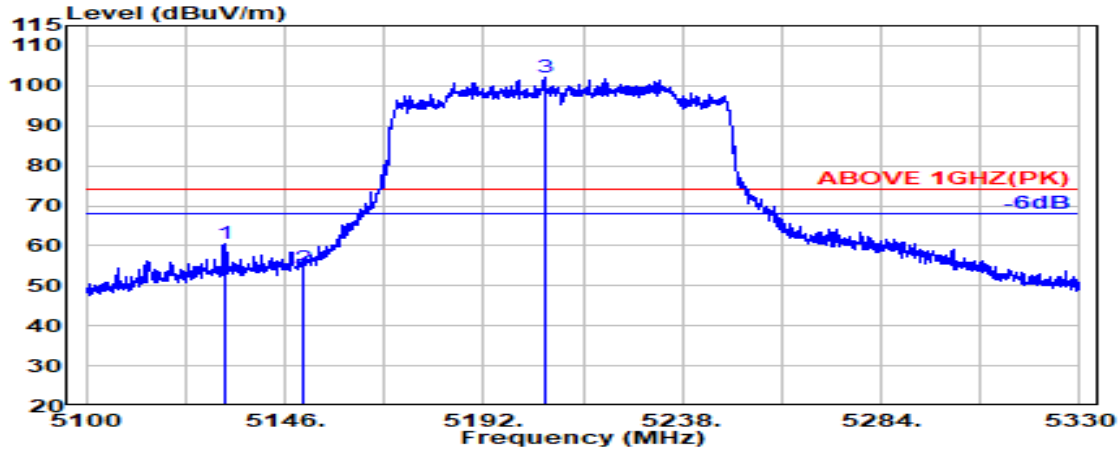

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.400	34.13	8.53	39.27	57.01	60.40	74.00	13.60	Peak
5150.000	34.20	8.54	39.27	50.86	54.33	74.00	19.67	Peak
@ 5206.200	34.31	8.58	39.27	98.48	102.10	---	---	Peak

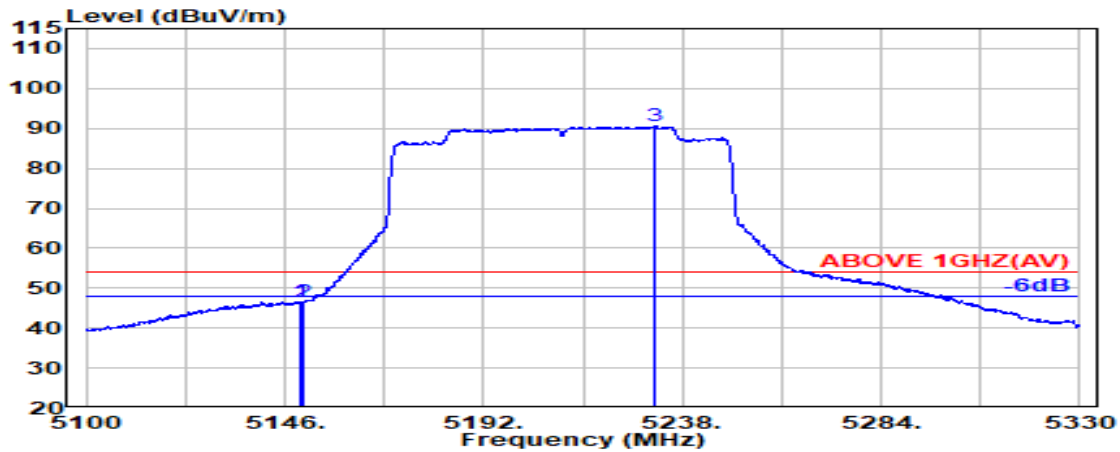


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	34.20	8.54	39.27	43.04	46.52	54.00	7.48	Average
5150.000	34.20	8.54	39.27	43.09	46.56	54.00	7.44	Average
@ 5231.500	34.36	8.59	39.27	86.86	90.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

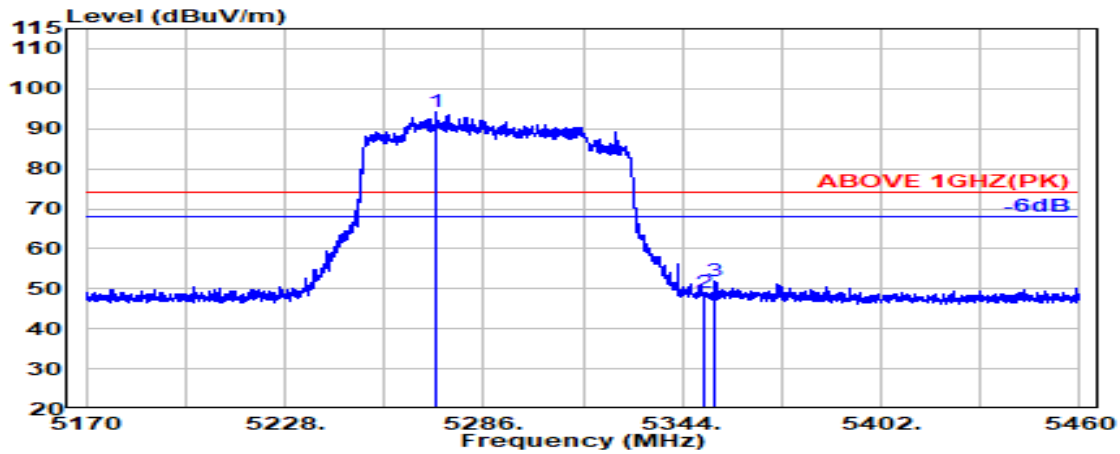

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.200	34.49	8.62	39.26	90.29	94.13	---	---	Peak
5350.000	34.50	8.67	39.26	45.03	48.94	74.00	25.06	Peak
5353.500	34.51	8.67	39.26	48.09	52.00	74.00	22.00	Peak

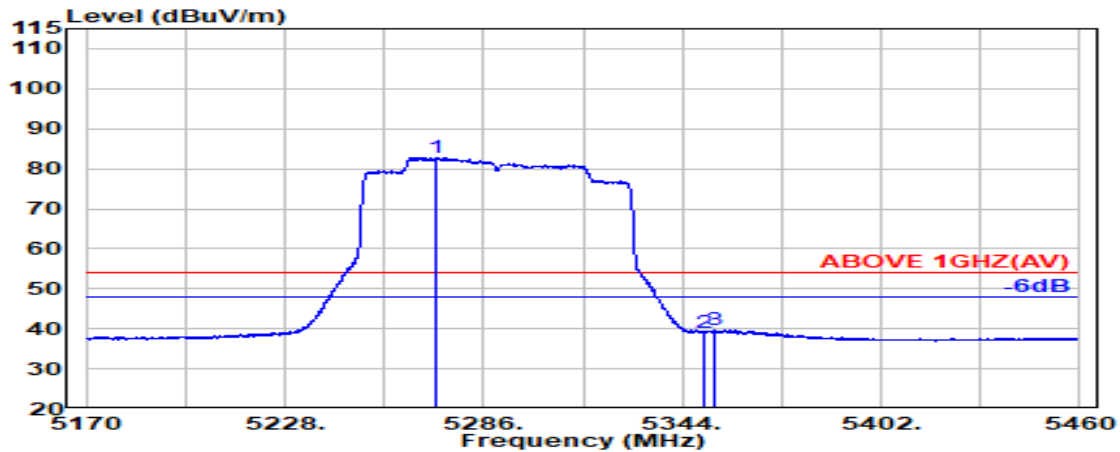


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.100	34.49	8.62	39.26	78.97	82.81	---	---	Average
5350.000	34.50	8.67	39.26	35.12	39.03	54.00	14.97	Average
5353.600	34.51	8.67	39.26	35.80	39.72	54.00	14.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

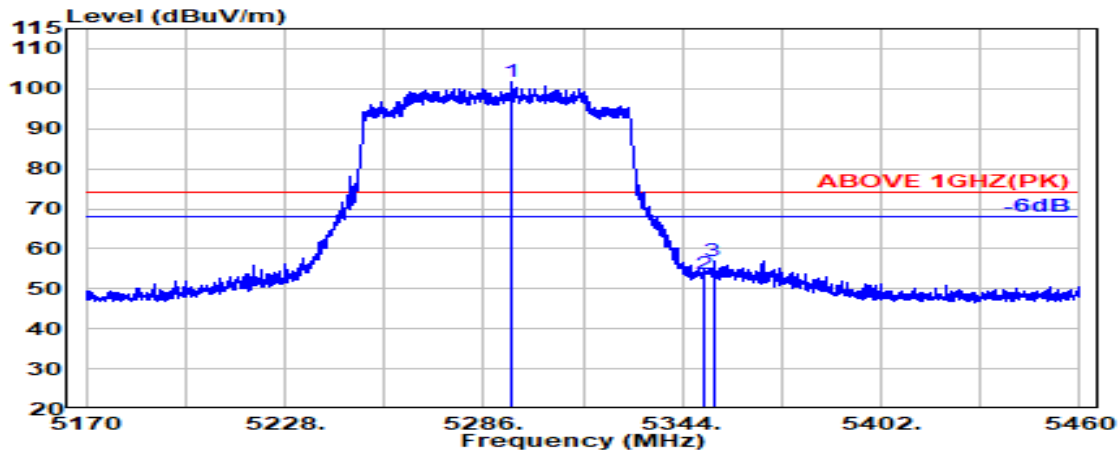

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.100	34.58	8.63	39.26	97.76	101.71	---	---	Peak
5350.000	34.50	8.67	39.26	49.62	53.53	74.00	20.47	Peak
5353.000	34.51	8.67	39.26	53.06	56.97	74.00	17.03	Peak

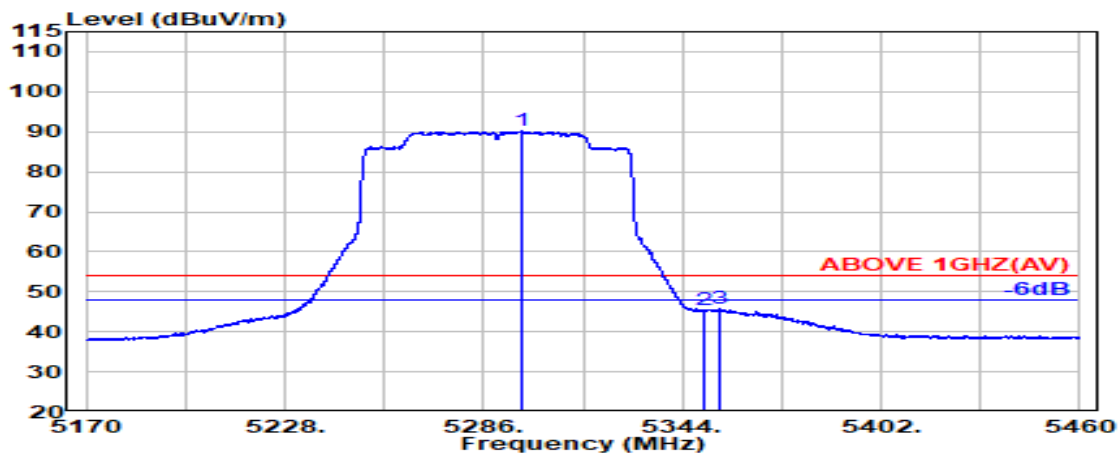


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.200	34.59	8.63	39.26	86.15	90.11	---	---	Average
5350.000	34.50	8.67	39.26	41.45	45.36	54.00	8.64	Average
5354.900	34.51	8.67	39.26	41.88	45.80	54.00	8.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

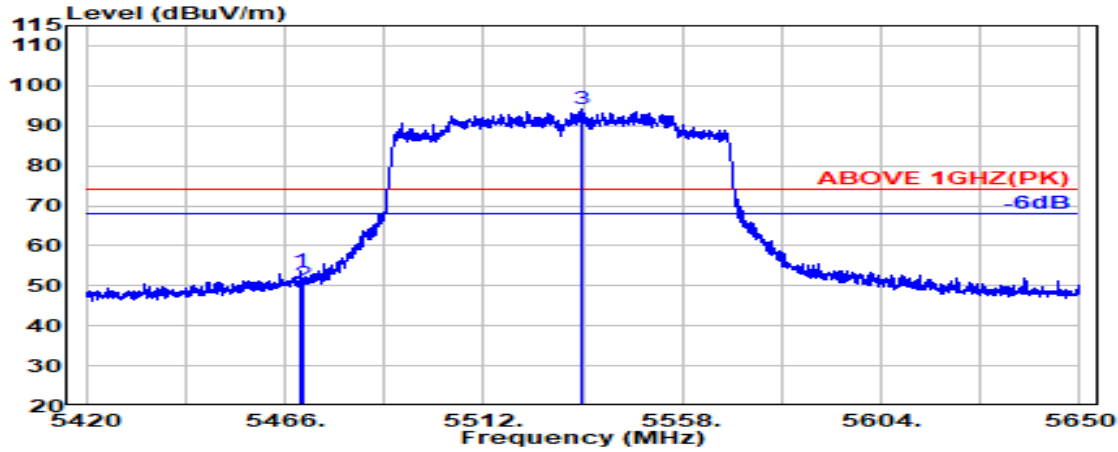

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.78	8.74	39.25	49.27	53.54	74.00	20.46	Peak
5470.000	34.78	8.74	39.25	46.37	50.64	74.00	23.36	Peak
@ 5534.900	34.83	8.77	39.26	89.73	94.07	---	---	Peak

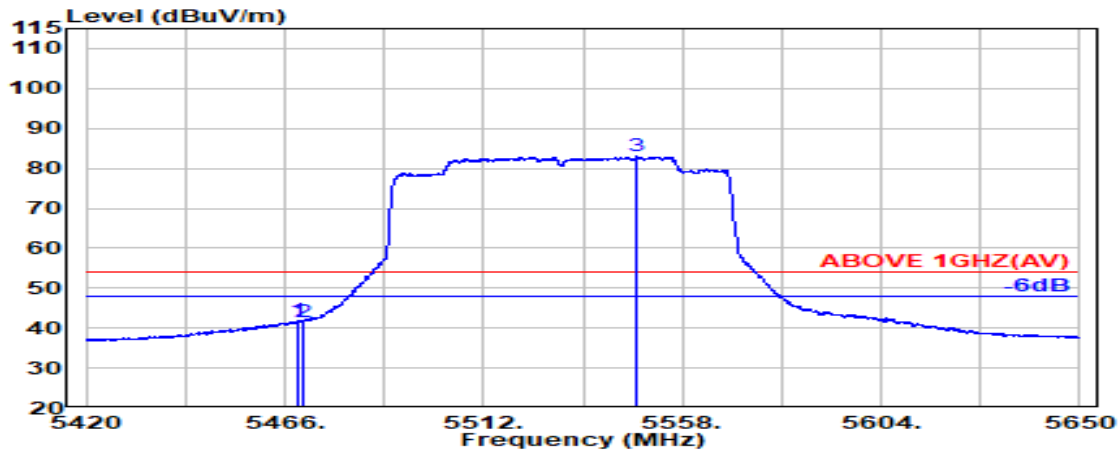


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.78	8.74	39.25	37.49	41.75	54.00	12.25	Average
5470.000	34.78	8.74	39.25	37.26	41.53	54.00	12.47	Average
@ 5547.500	34.80	8.78	39.26	78.60	82.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

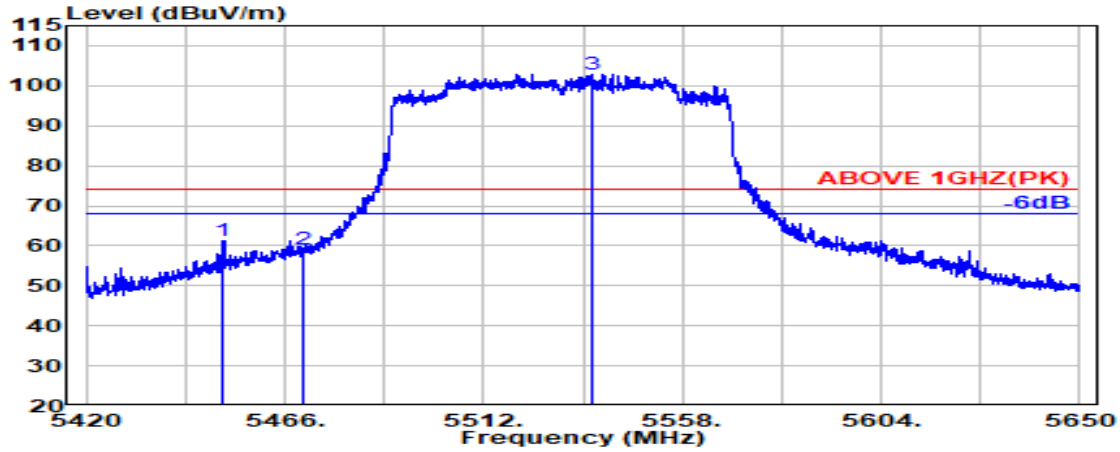

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.800	34.71	8.73	39.25	57.19	61.37	74.00	12.63	Peak
5470.000	34.78	8.74	39.25	54.68	58.94	74.00	15.06	Peak
@ 5537.300	34.83	8.77	39.26	98.50	102.84	---	---	Peak

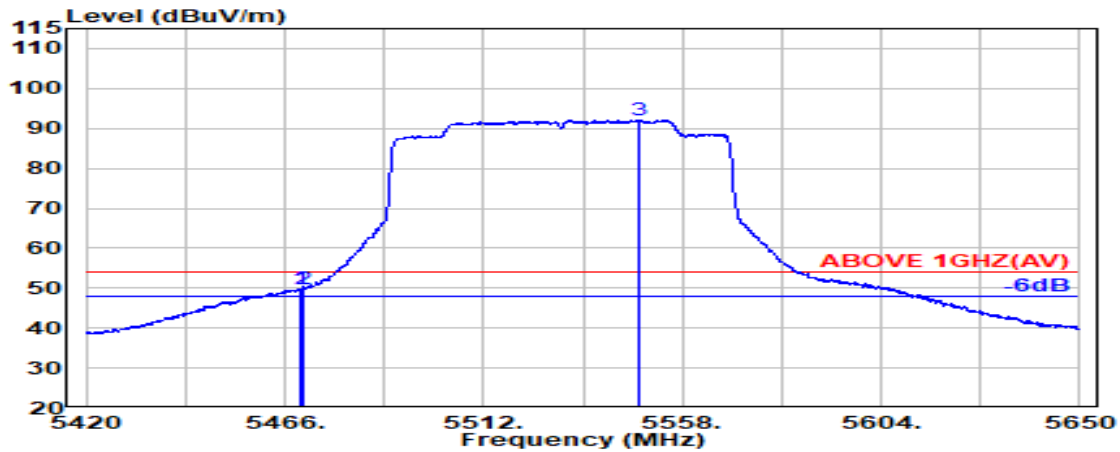


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.78	8.74	39.25	45.54	49.80	54.00	4.20	Average
5470.000	34.78	8.74	39.25	45.59	49.85	54.00	4.15	Average
@ 5548.000	34.80	8.78	39.26	87.75	92.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

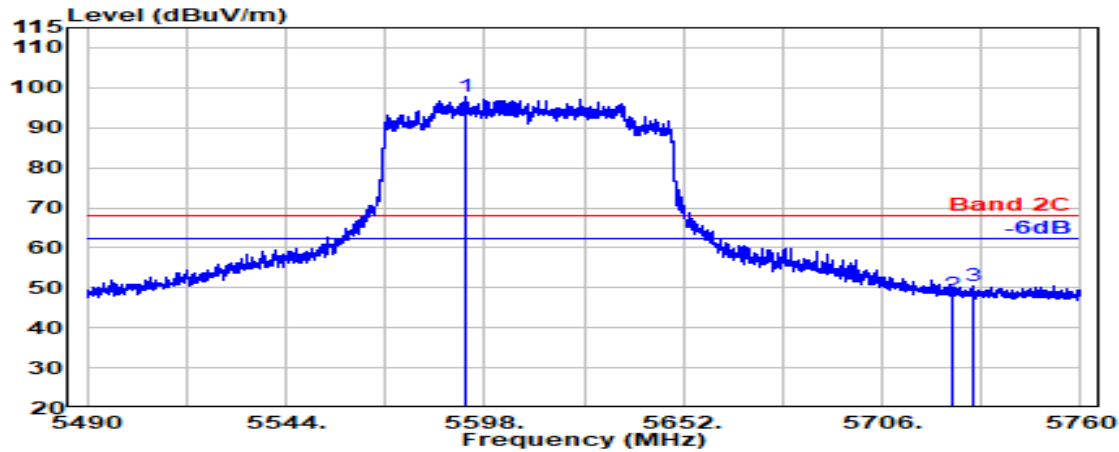

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.800	34.71	8.81	39.27	93.41	97.66	---	---	Peak
5725.000	34.45	8.88	39.29	44.20	48.24	68.20	19.96	Peak
5730.800	34.46	8.88	39.29	46.51	50.56	68.20	17.64	Peak

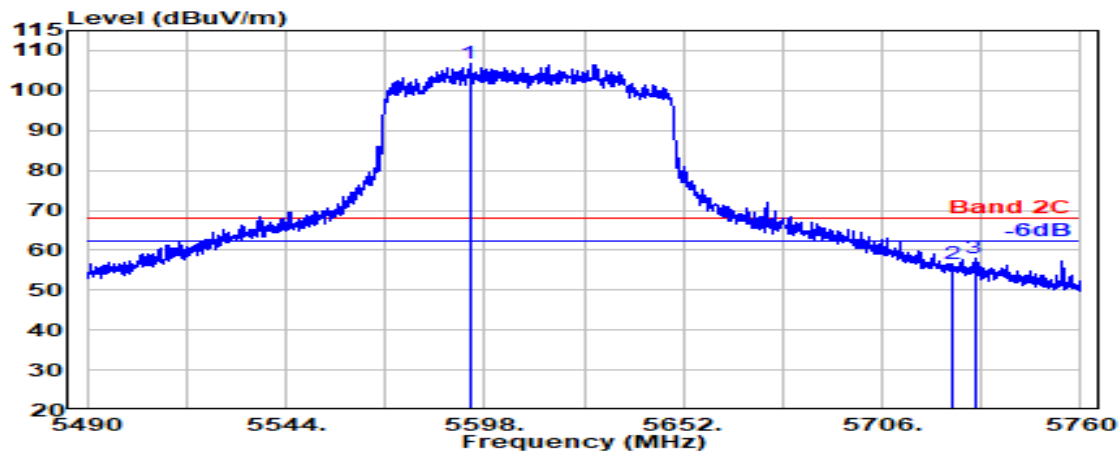


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.900	34.71	8.81	39.27	102.50	106.75	---	---	Peak
5725.000	34.45	8.88	39.29	52.51	56.55	68.20	11.65	Peak
5731.100	34.46	8.88	39.29	53.80	57.86	68.20	10.34	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

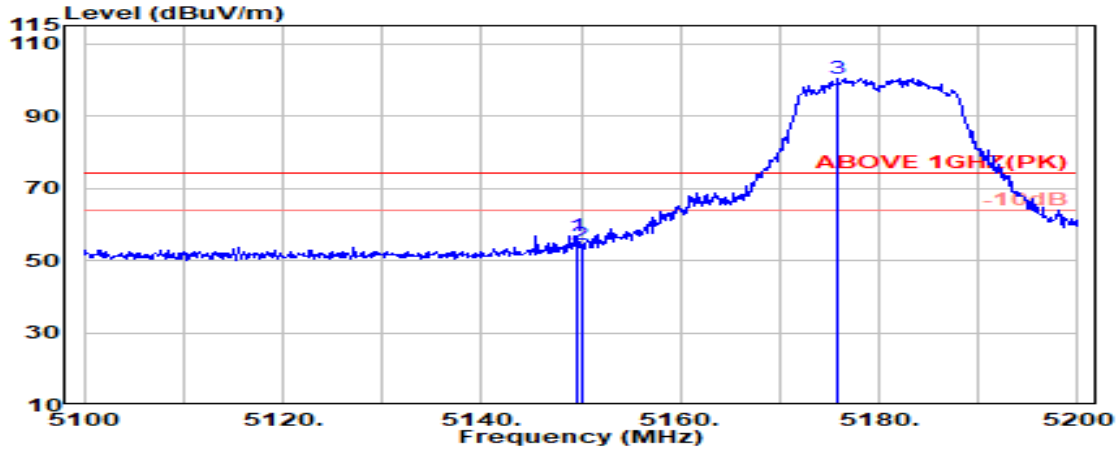

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.54	39.27	53.46	56.93	74.00	17.07	Peak
5150.000	34.20	8.54	39.27	50.88	54.35	74.00	19.65	Peak
@ 5175.900	34.25	8.56	39.27	96.87	100.41	---	---	Peak

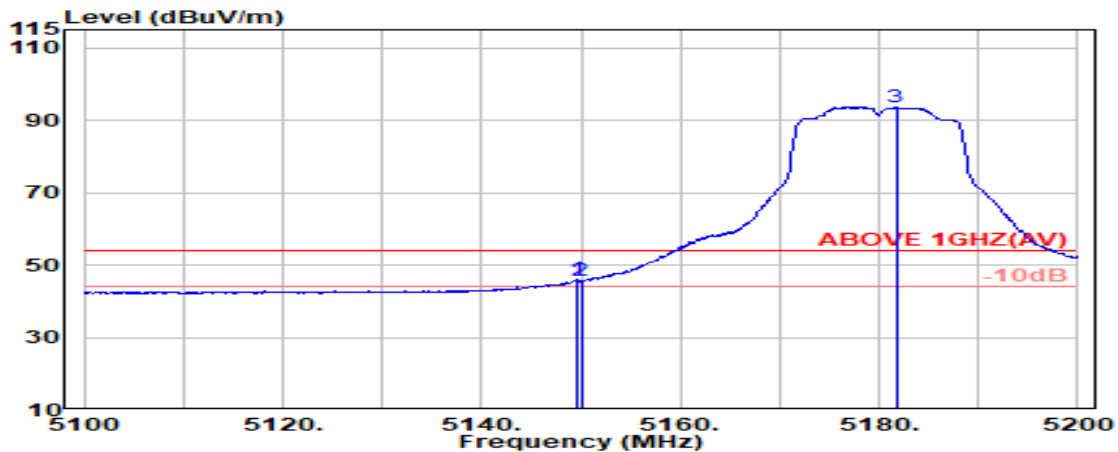


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	42.41	45.88	54.00	8.12	Average
5150.000	34.20	8.54	39.27	42.05	45.52	54.00	8.48	Average
@ 5181.700	34.26	8.56	39.27	90.04	93.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

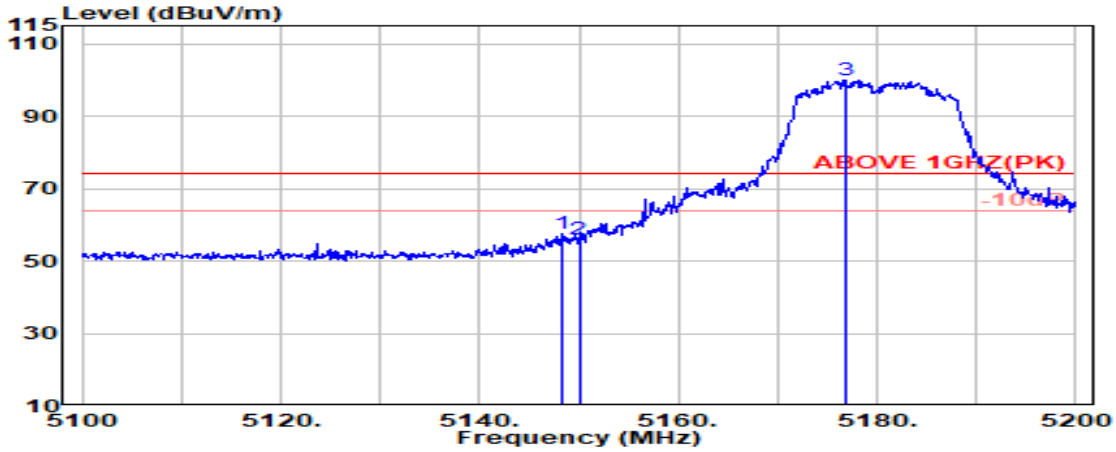

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.19	8.54	39.27	54.08	57.54	74.00	16.46	Peak
5150.000	34.20	8.54	39.27	52.45	55.92	74.00	18.08	Peak
@ 5176.800	34.25	8.56	39.27	96.29	99.84	---	---	Peak

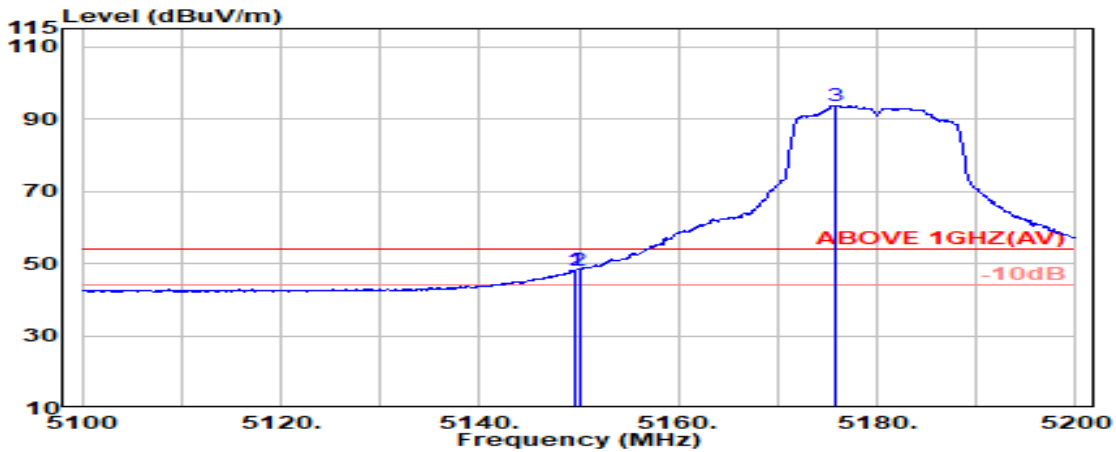


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	44.47	47.95	54.00	6.05	Average
5150.000	34.20	8.54	39.27	44.38	47.85	54.00	6.15	Average
@ 5175.900	34.25	8.56	39.27	90.16	93.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

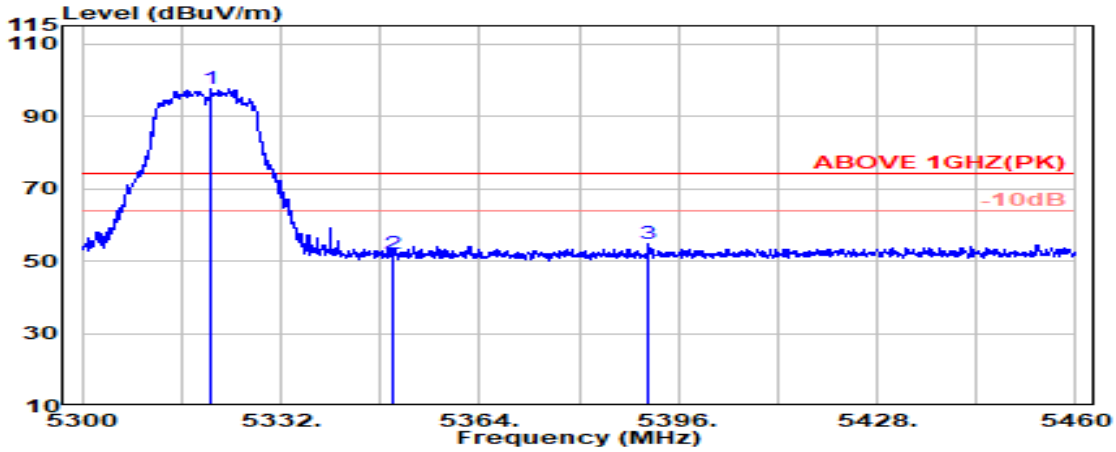

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.800	34.56	8.65	39.26	93.52	97.47	---	---	Peak
5350.000	34.50	8.67	39.26	48.15	52.06	74.00	21.94	Peak
5391.100	34.58	8.69	39.26	50.59	54.61	74.00	19.39	Peak

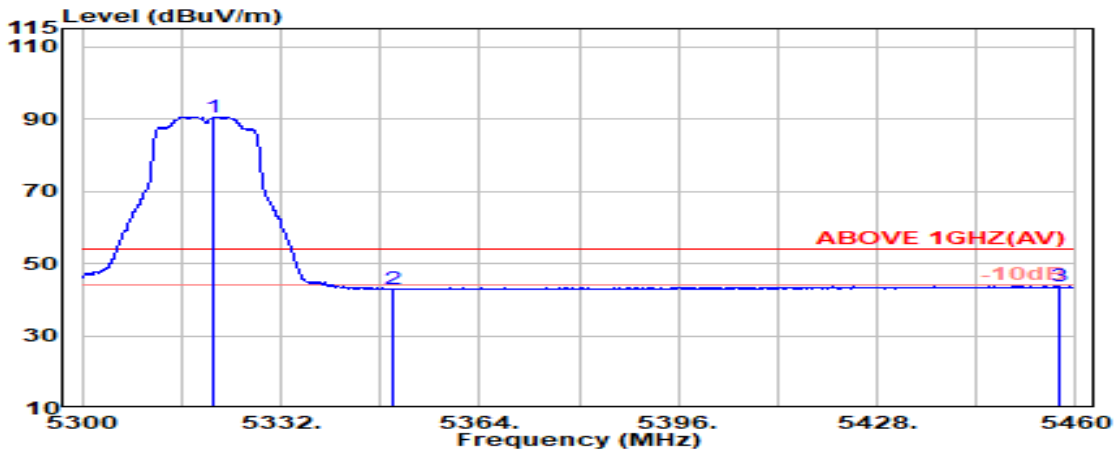


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	34.56	8.65	39.26	86.65	90.60	---	---	Average
5350.000	34.50	8.67	39.26	38.98	42.88	54.00	11.12	Average
5457.200	34.73	8.73	39.25	39.43	43.63	54.00	10.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

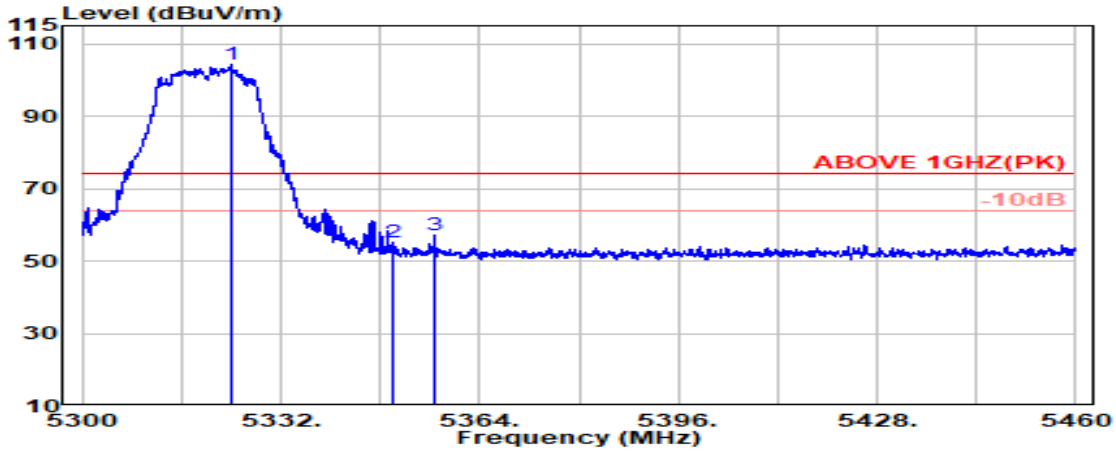

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.55	8.65	39.26	100.17	104.11	---	---	Peak
5350.000	34.50	8.67	39.26	51.32	55.23	74.00	18.77	Peak
5356.800	34.51	8.67	39.26	53.12	57.05	74.00	16.95	Peak

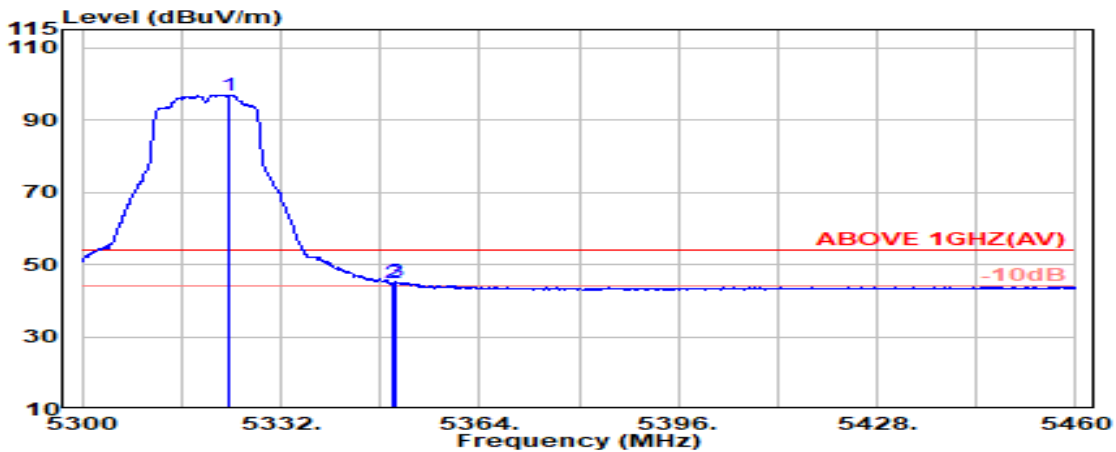


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.55	8.65	39.26	92.96	96.90	---	---	Average
5350.000	34.50	8.67	39.26	40.92	44.83	54.00	9.17	Average
5350.400	34.50	8.67	39.26	41.30	45.21	54.00	8.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

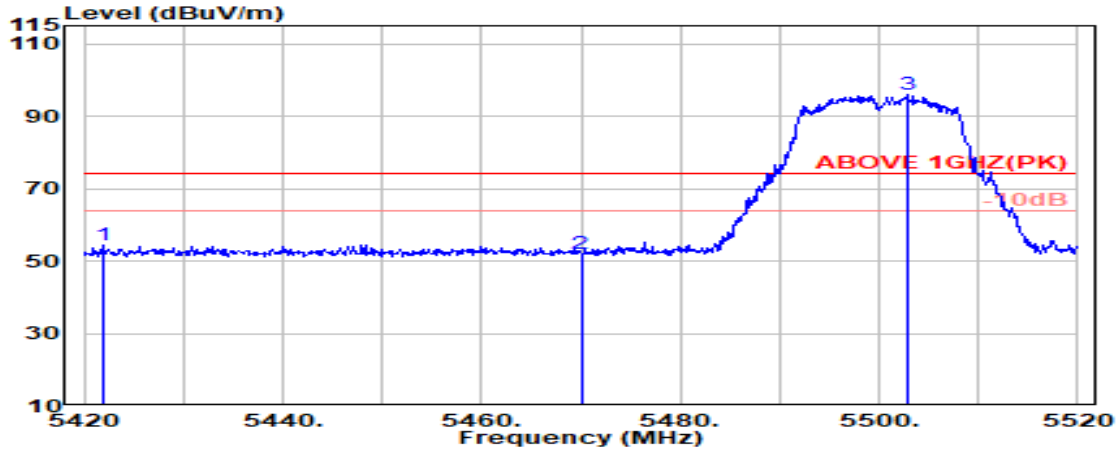

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.900	34.64	8.71	39.25	50.34	54.44	74.00	19.56	Peak
5470.000	34.78	8.74	39.25	47.91	52.18	74.00	21.82	Peak
@ 5502.800	34.89	8.75	39.25	91.52	95.92	---	---	Peak

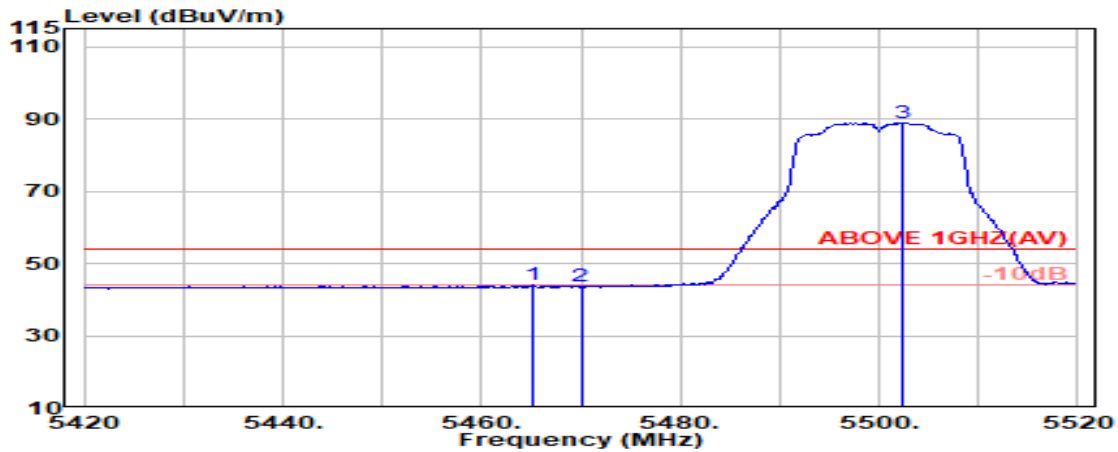


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.76	8.73	39.25	39.69	43.93	54.00	10.07	Average
5470.000	34.78	8.74	39.25	39.26	43.53	54.00	10.47	Average
@ 5502.300	34.90	8.75	39.25	84.40	88.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

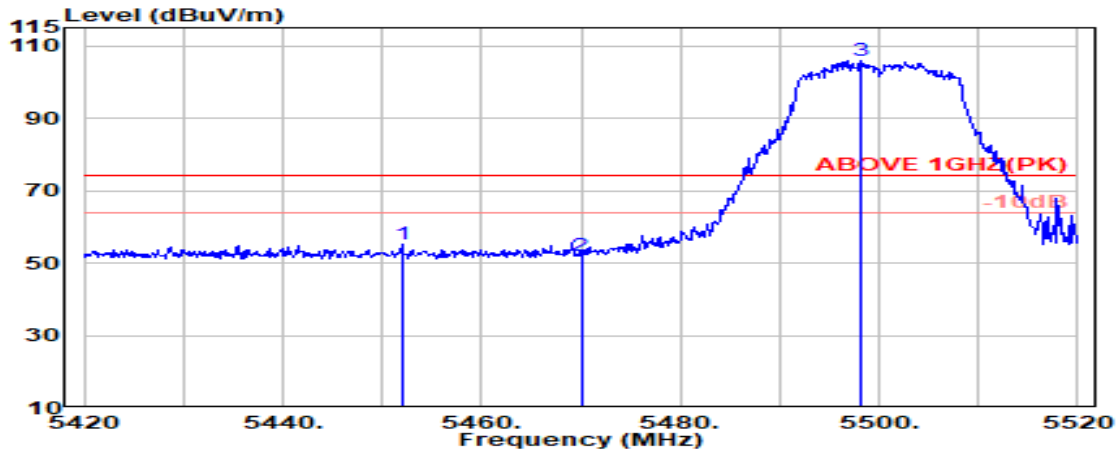

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.000	34.71	8.73	39.25	51.15	55.33	74.00	18.67	Peak
5470.000	34.78	8.74	39.25	47.90	52.16	74.00	21.84	Peak
@ 5498.200	34.89	8.75	39.25	101.36	105.75	---	---	Peak

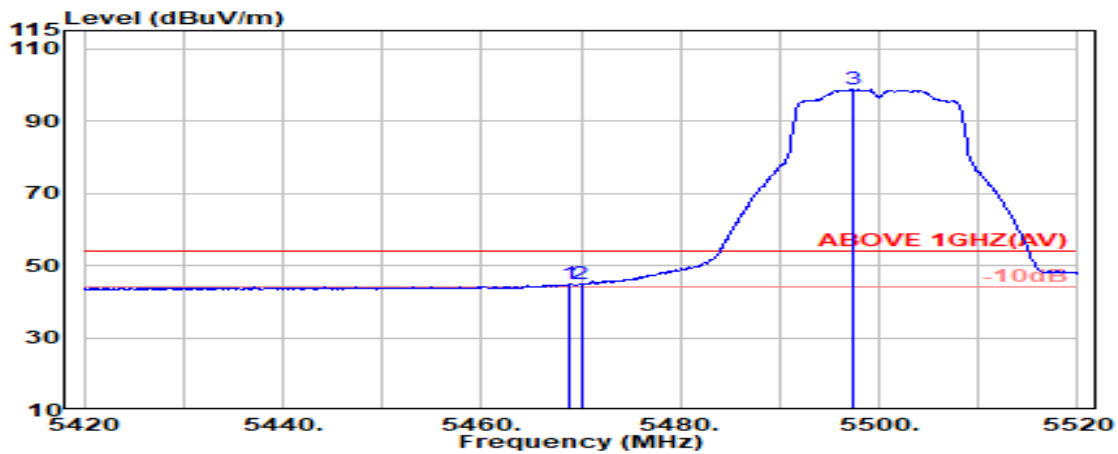


Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	40.53	44.78	54.00	9.22	Average
5470.000	34.78	8.74	39.25	40.65	44.92	54.00	9.08	Average
@ 5497.400	34.89	8.75	39.25	94.26	98.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

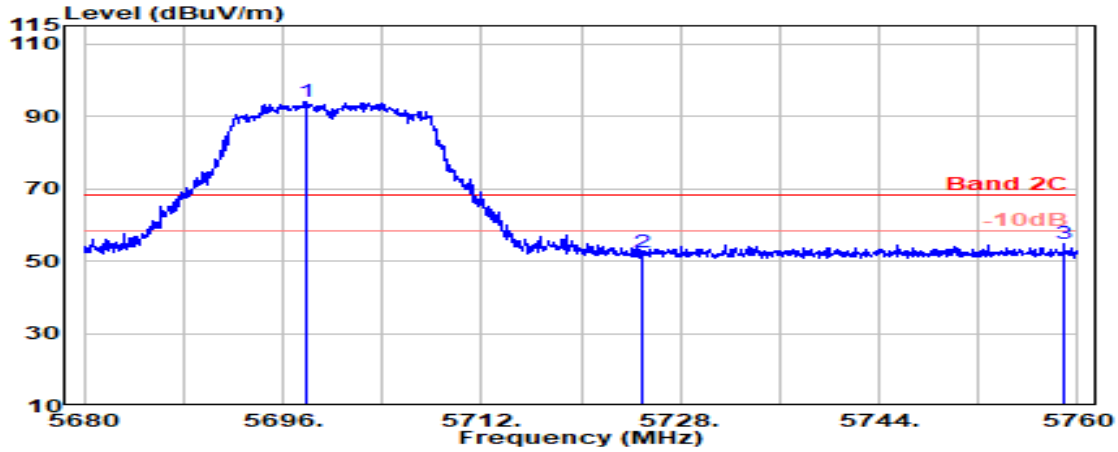
**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.800	34.41	8.87	39.29	89.94	93.93	---	---	Peak
5725.000	34.45	8.88	39.29	48.28	52.32	68.20	15.88	Peak
5758.850	34.52	8.90	39.30	50.52	54.64	68.20	13.56	Peak

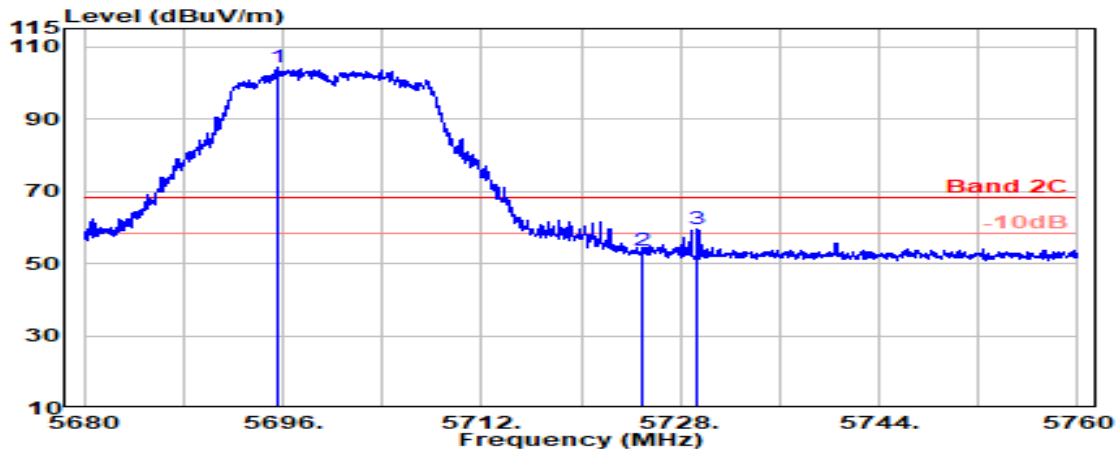
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.500	34.42	8.86	39.29	100.16	104.16	---	---	Peak
5725.000	34.45	8.88	39.29	49.40	53.44	68.20	14.76	Peak
5729.400	34.46	8.88	39.29	55.42	59.47	68.20	8.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

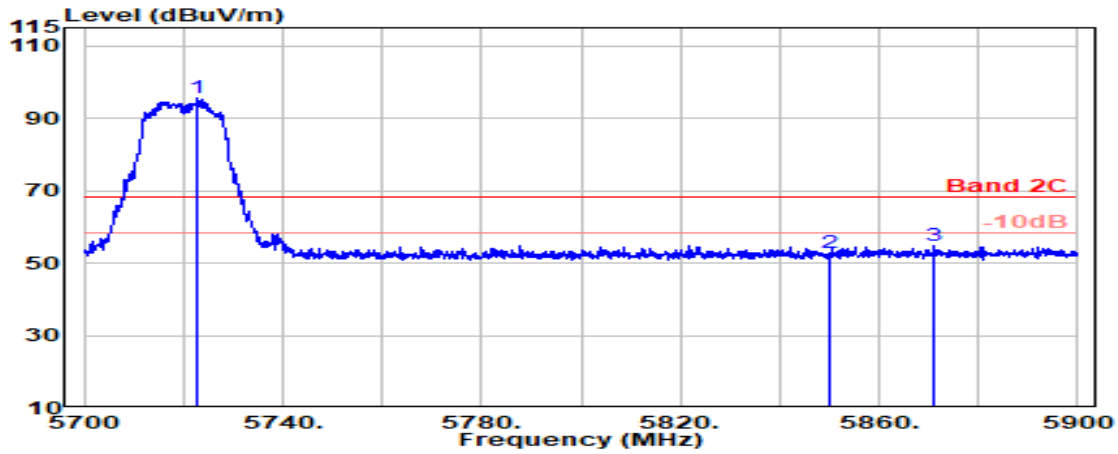

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.700	34.45	8.88	39.29	91.58	95.62	---	---	Peak
5850.000	34.70	8.95	39.31	48.58	52.92	68.20	15.28	Peak
5871.100	34.74	8.96	39.32	50.25	54.63	68.20	13.57	Peak

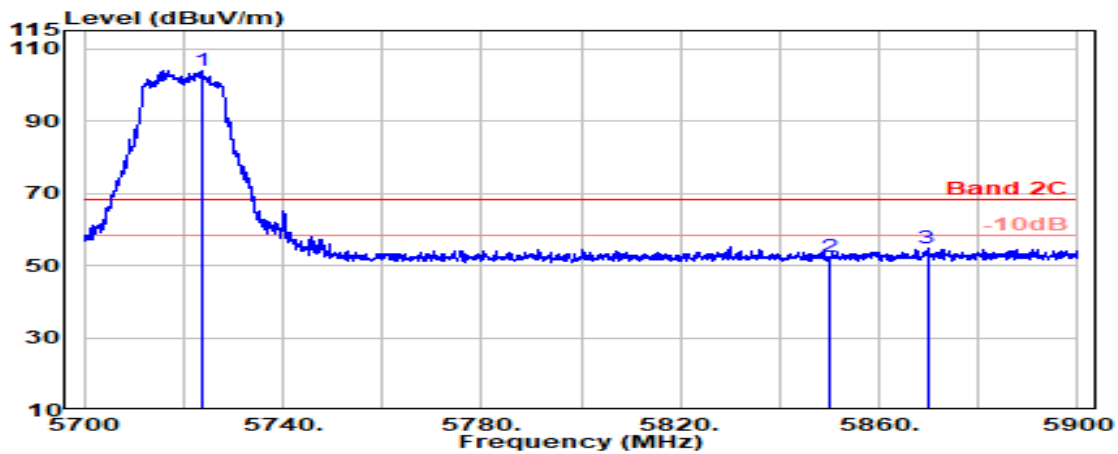


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.700	34.45	8.88	39.29	99.83	103.87	---	---	Peak
5850.000	34.70	8.95	39.31	48.08	52.41	68.20	15.79	Peak
5869.700	34.74	8.96	39.32	50.48	54.86	68.20	13.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

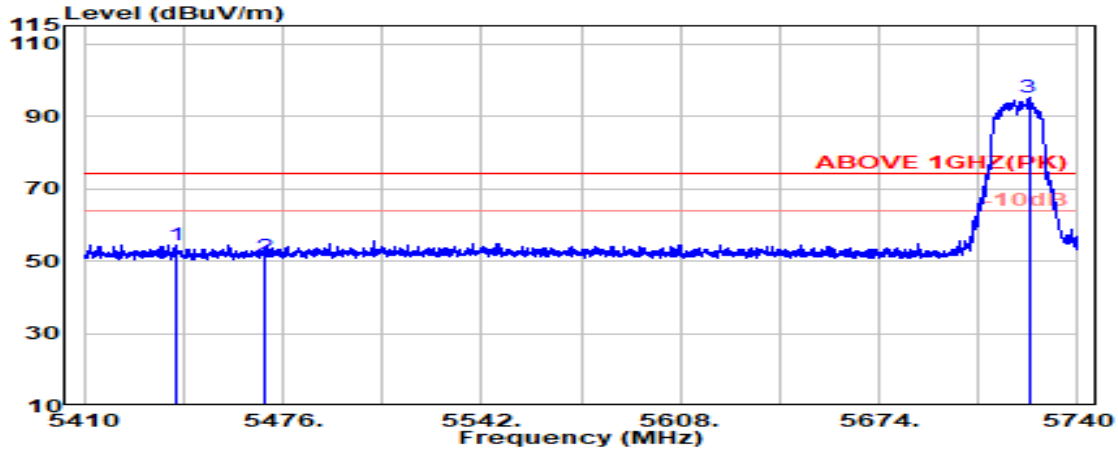

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.300	34.68	8.72	39.25	50.43	54.57	74.00	19.43	Peak
5470.000	34.78	8.74	39.25	47.06	51.32	74.00	22.68	Peak
@ 5723.700	34.45	8.88	39.29	91.07	95.10	---	---	Peak

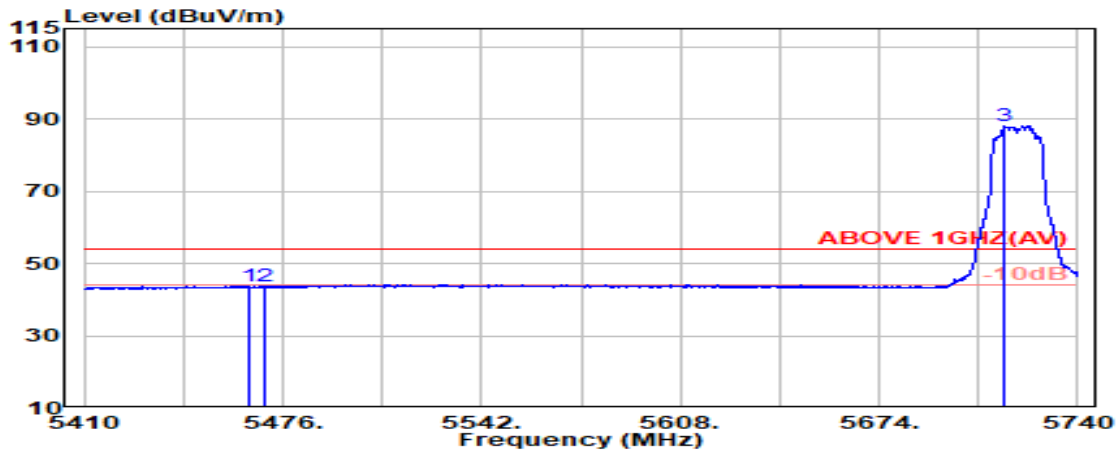


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.76	8.73	39.25	39.39	43.63	54.00	10.37	Average
5470.000	34.78	8.74	39.25	39.25	43.51	54.00	10.49	Average
@ 5715.900	34.43	8.88	39.29	84.05	88.07	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

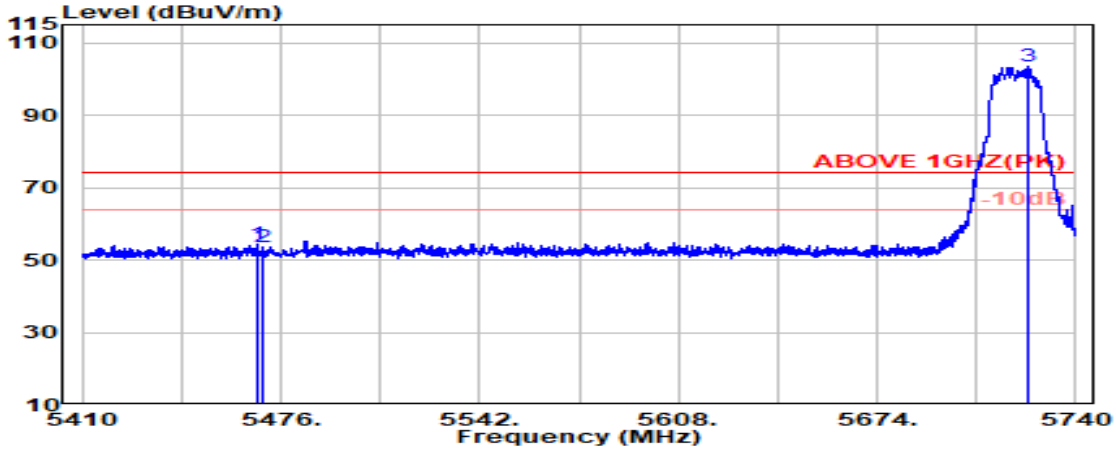

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.77	8.73	39.25	50.08	54.34	74.00	19.66	Peak
5470.000	34.78	8.74	39.25	49.32	53.58	74.00	20.42	Peak
@ 5724.400	34.45	8.88	39.29	99.56	103.60	---	---	Peak

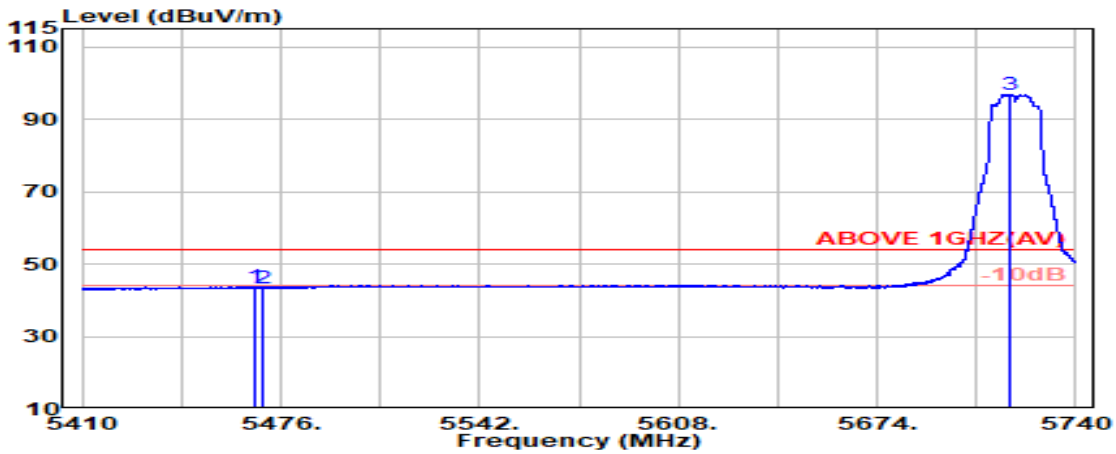


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.77	8.73	39.25	39.47	43.73	54.00	10.27	Average
5470.000	34.78	8.74	39.25	39.13	43.40	54.00	10.60	Average
@ 5718.200	34.44	8.88	39.29	92.85	96.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

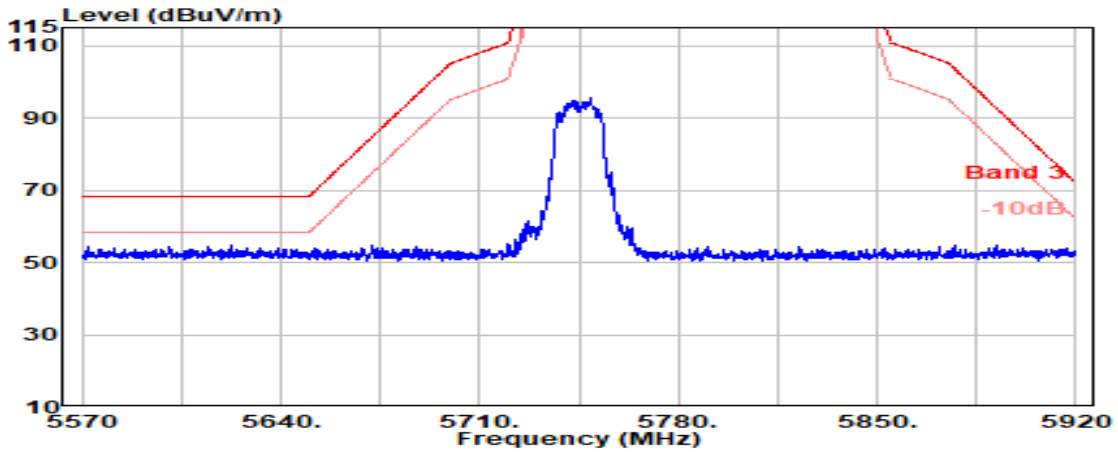


Antenna at Vertical Polarization

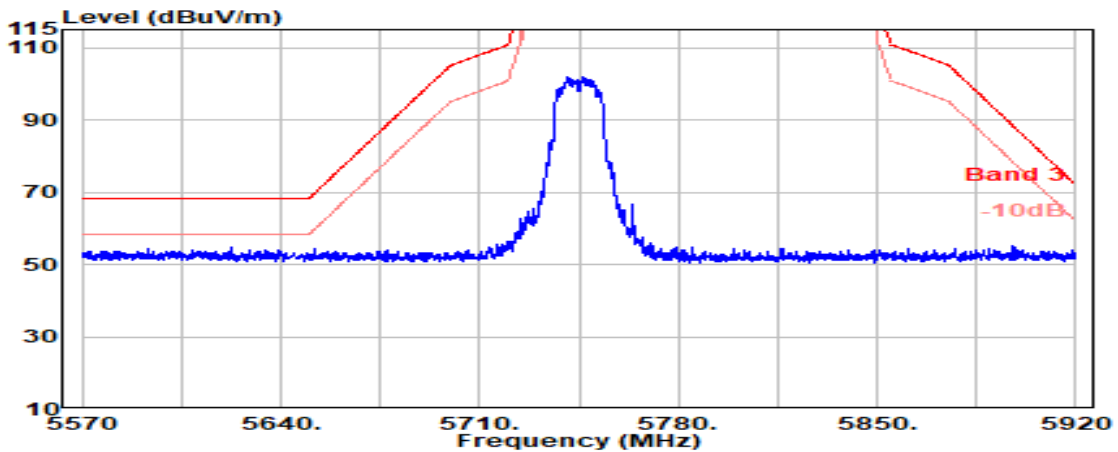




Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

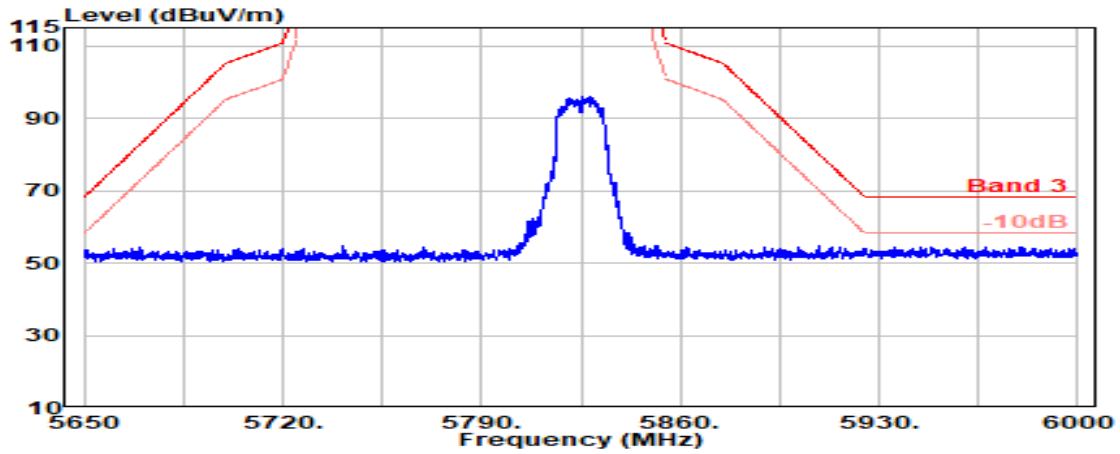

Antenna at Vertical Polarization

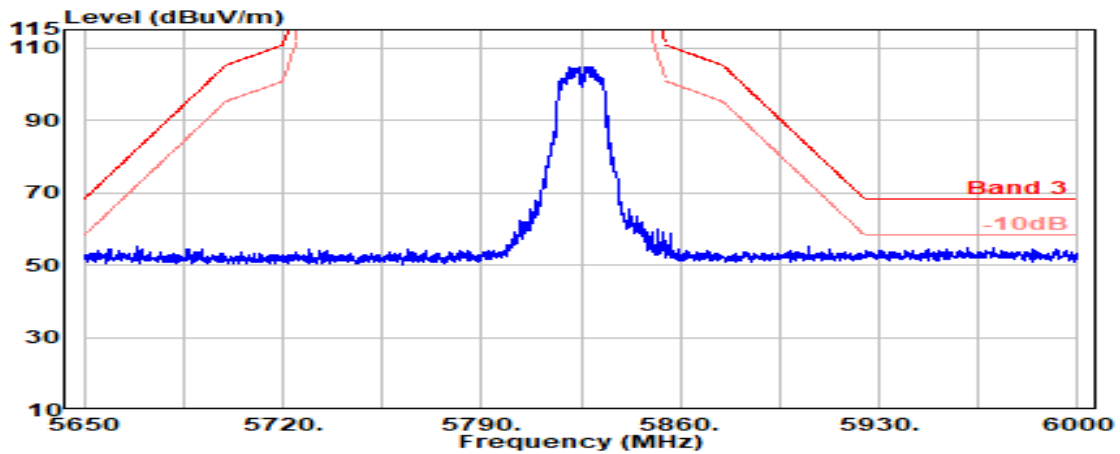


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

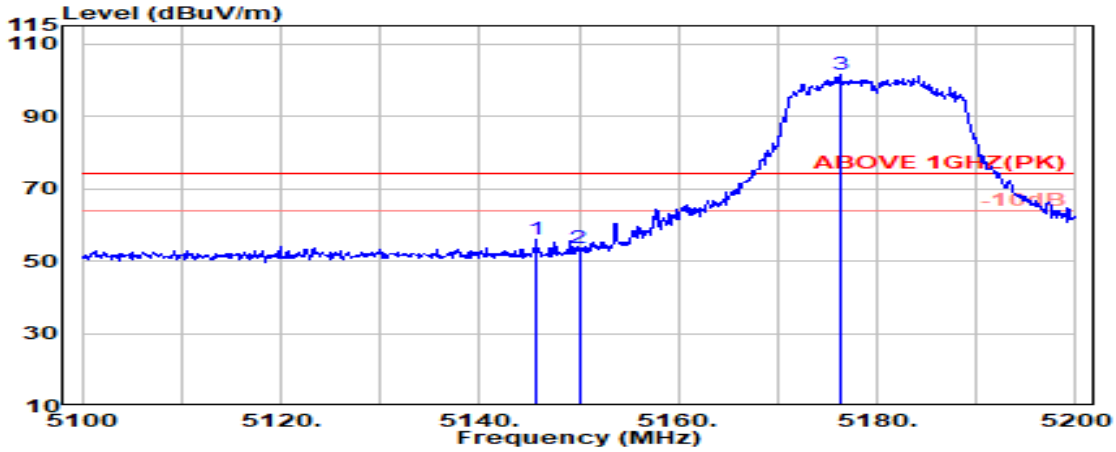

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	34.18	8.54	39.27	52.49	55.95	74.00	18.05	Peak
5150.000	34.20	8.54	39.27	49.96	53.43	74.00	20.57	Peak
@ 5176.300	34.25	8.56	39.27	97.80	101.34	---	---	Peak

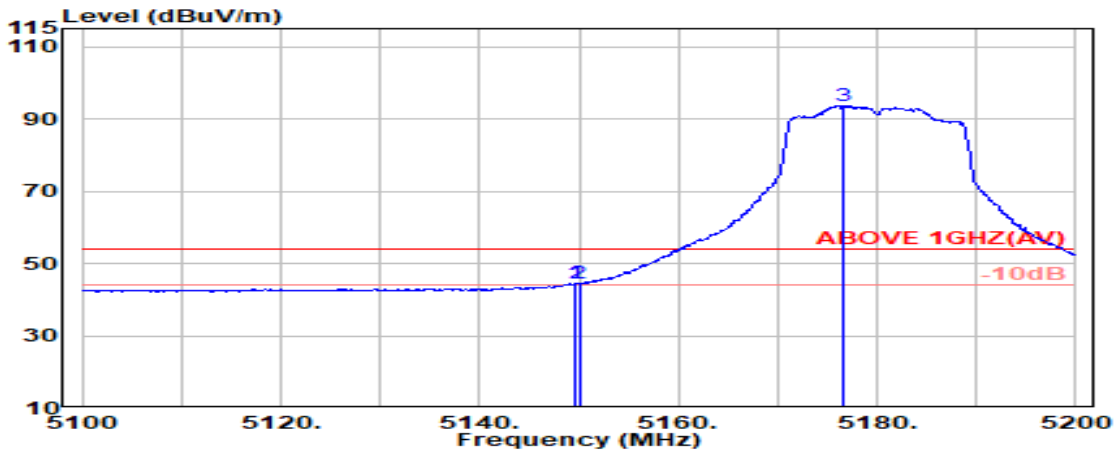


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	40.96	44.44	54.00	9.56	Average
5150.000	34.20	8.54	39.27	40.84	44.31	54.00	9.69	Average
@ 5176.600	34.25	8.56	39.27	90.16	93.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

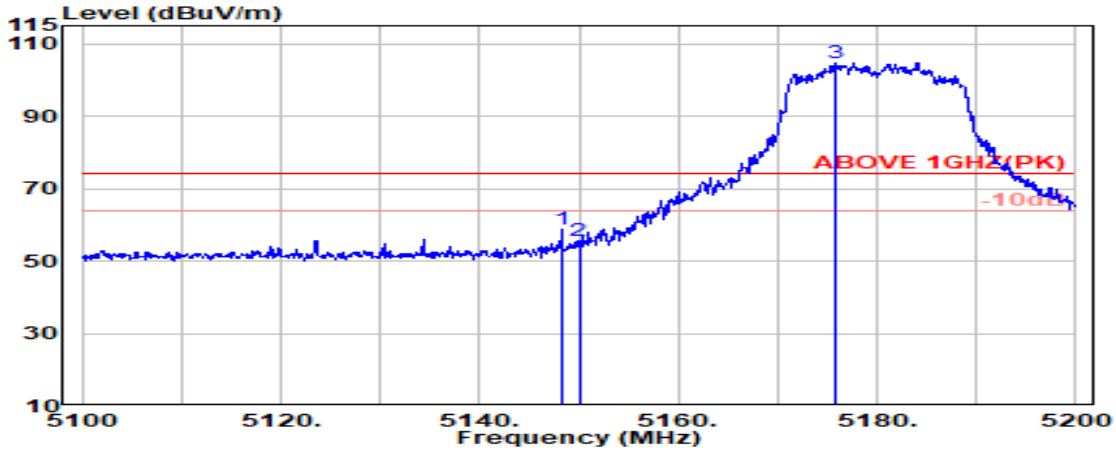

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.19	8.54	39.27	55.24	58.71	74.00	15.29	Peak
5150.000	34.20	8.54	39.27	51.93	55.40	74.00	18.60	Peak
@ 5175.700	34.25	8.56	39.27	101.34	104.88	---	---	Peak

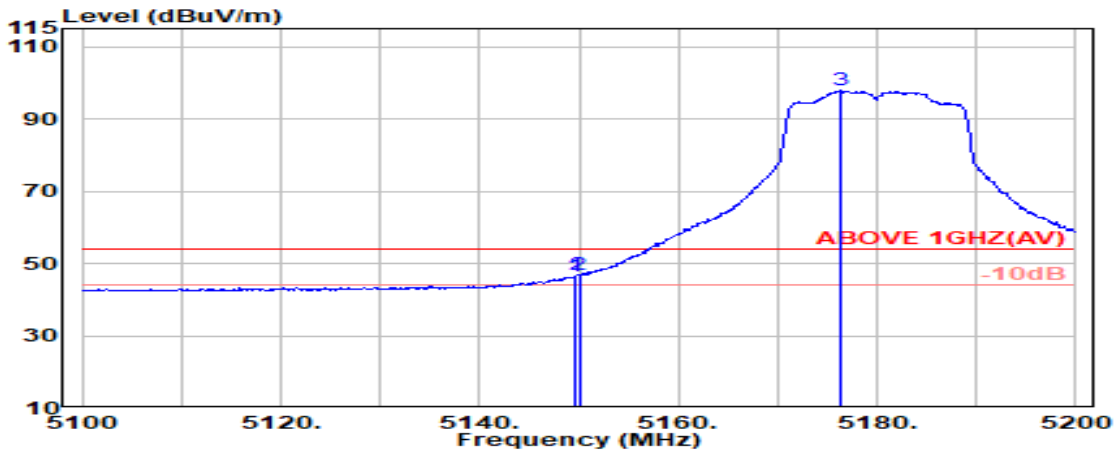


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	42.82	46.29	54.00	7.71	Average
5150.000	34.20	8.54	39.27	43.28	46.75	54.00	7.25	Average
@ 5176.300	34.25	8.56	39.27	94.26	97.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

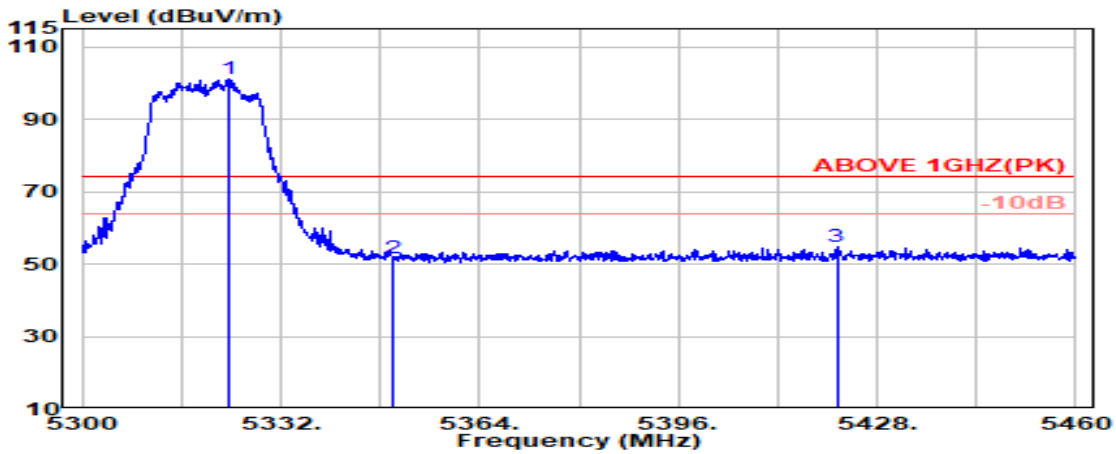

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	34.55	8.65	39.26	97.14	101.09	---	---	Peak
5350.000	34.50	8.67	39.26	47.61	51.52	74.00	22.48	Peak
5421.500	34.64	8.71	39.25	50.52	54.61	74.00	19.39	Peak

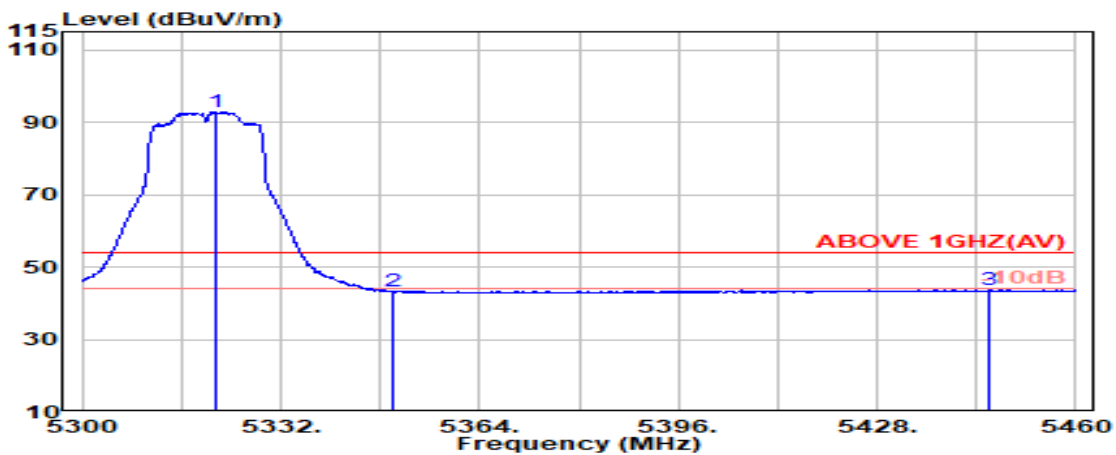


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.56	8.65	39.26	88.88	92.83	---	---	Average
5350.000	34.50	8.67	39.26	39.44	43.35	54.00	10.65	Average
5446.200	34.69	8.72	39.25	39.49	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

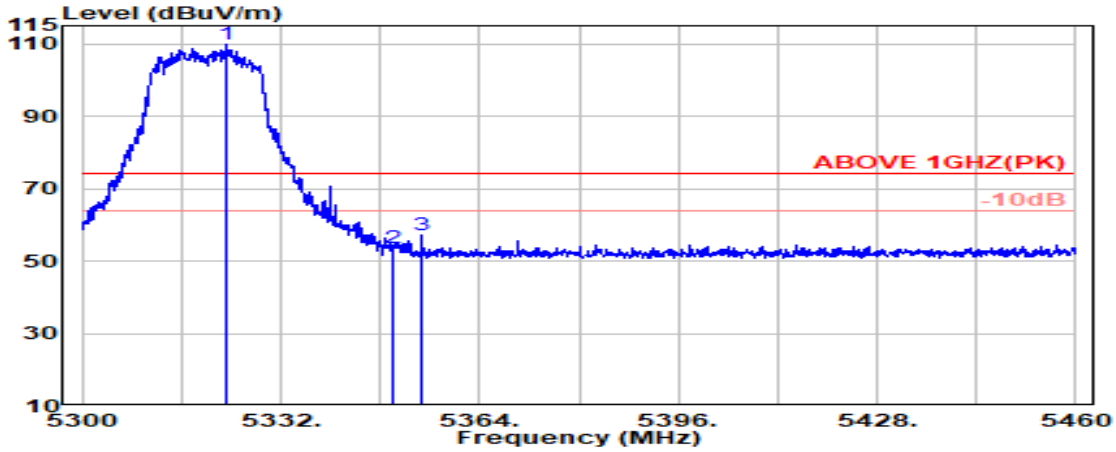

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	34.55	8.65	39.26	106.04	109.98	---	---	Peak
5350.000	34.50	8.67	39.26	49.82	53.72	74.00	20.28	Peak
5354.600	34.51	8.67	39.26	53.04	56.96	74.00	17.04	Peak

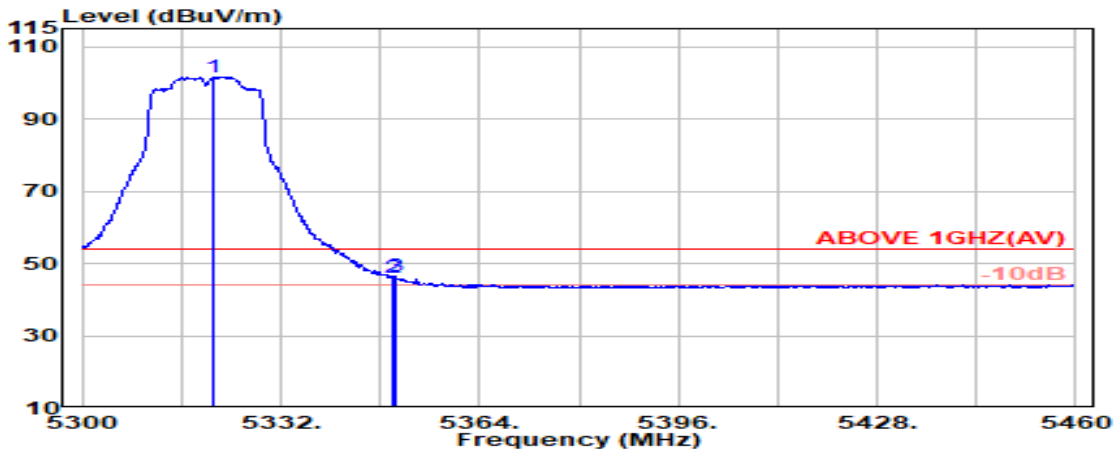


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.200	34.56	8.65	39.26	97.76	101.70	---	---	Average
5350.000	34.50	8.67	39.26	42.31	46.22	54.00	7.78	Average
5350.400	34.50	8.67	39.26	42.48	46.39	54.00	7.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

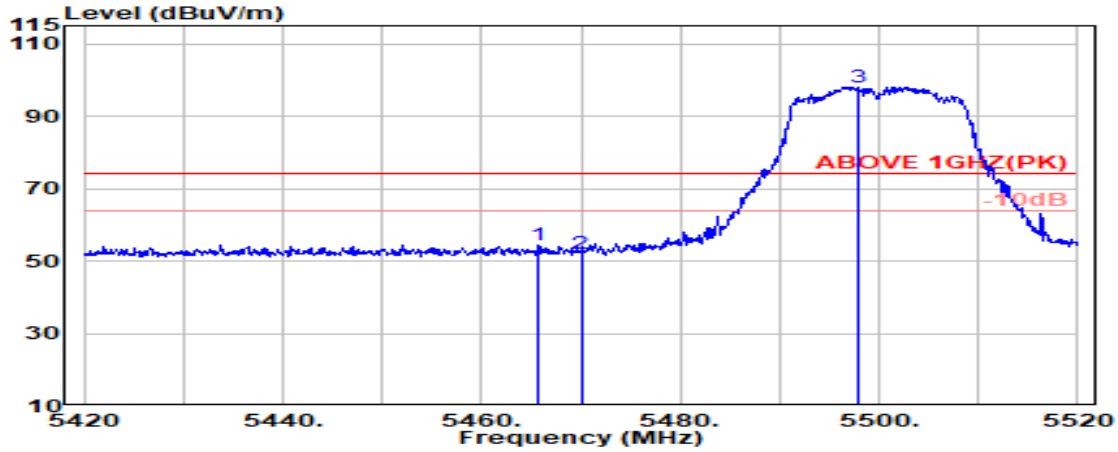

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.76	8.73	39.25	50.30	54.55	74.00	19.45	Peak
5470.000	34.78	8.74	39.25	47.62	51.89	74.00	22.11	Peak
@ 5497.900	34.89	8.75	39.25	93.73	98.12	---	---	Peak

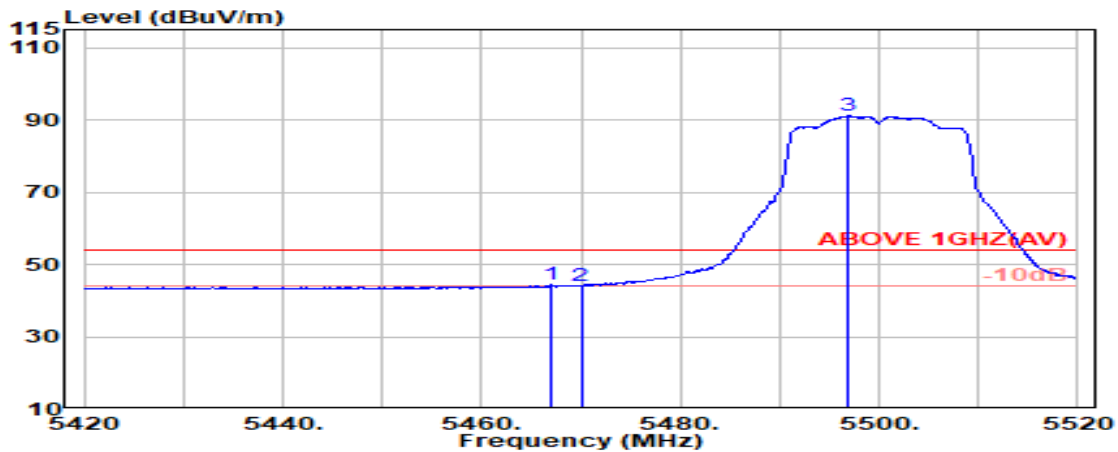


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.77	8.73	39.25	40.13	44.38	54.00	9.62	Average
5470.000	34.78	8.74	39.25	39.89	44.15	54.00	9.85	Average
@ 5496.800	34.89	8.75	39.25	86.73	91.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

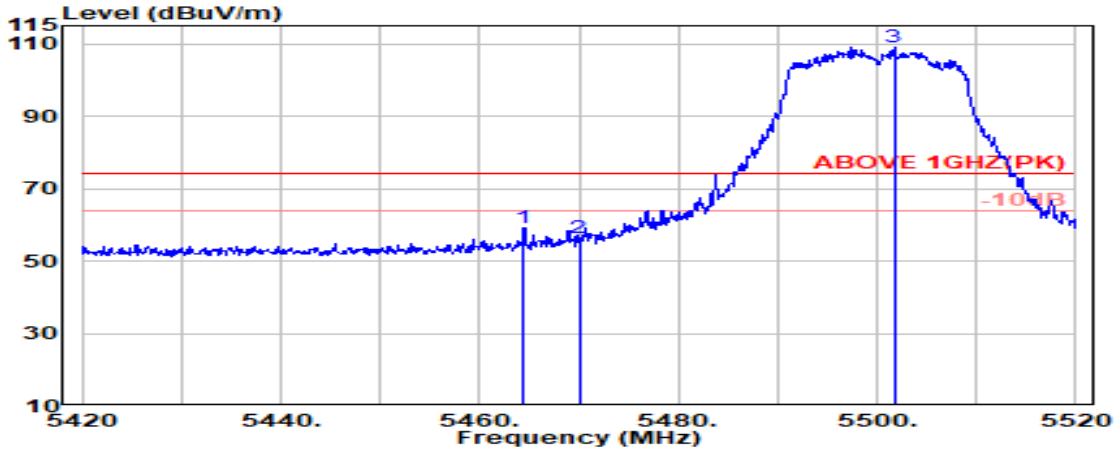

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.76	8.73	39.25	54.77	59.01	74.00	14.99	Peak
5470.000	34.78	8.74	39.25	51.91	56.17	74.00	17.83	Peak
@ 5501.700	34.90	8.75	39.25	104.58	108.98	---	---	Peak

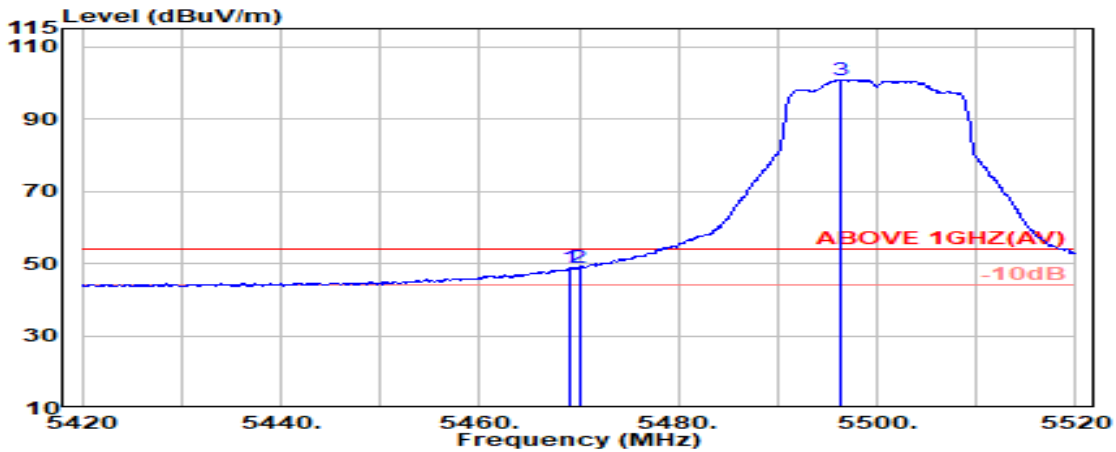


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	44.59	48.85	54.00	5.15	Average
5470.000	34.78	8.74	39.25	44.40	48.66	54.00	5.34	Average
@ 5496.300	34.89	8.75	39.25	96.52	100.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

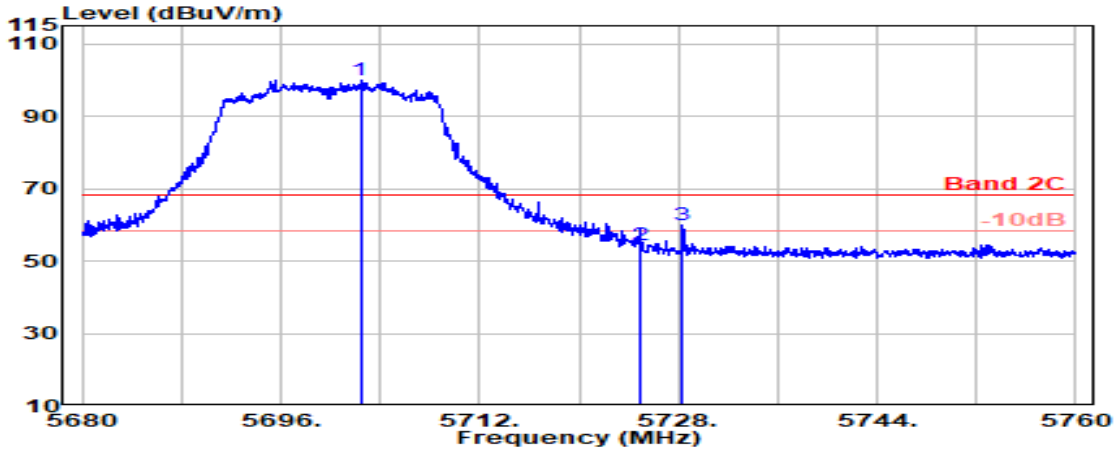

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	34.40	8.87	39.29	95.90	99.88	---	---	Peak
5725.000	34.45	8.88	39.29	50.30	54.34	68.20	13.86	Peak
5728.300	34.46	8.88	39.29	56.00	60.04	68.20	8.16	Peak

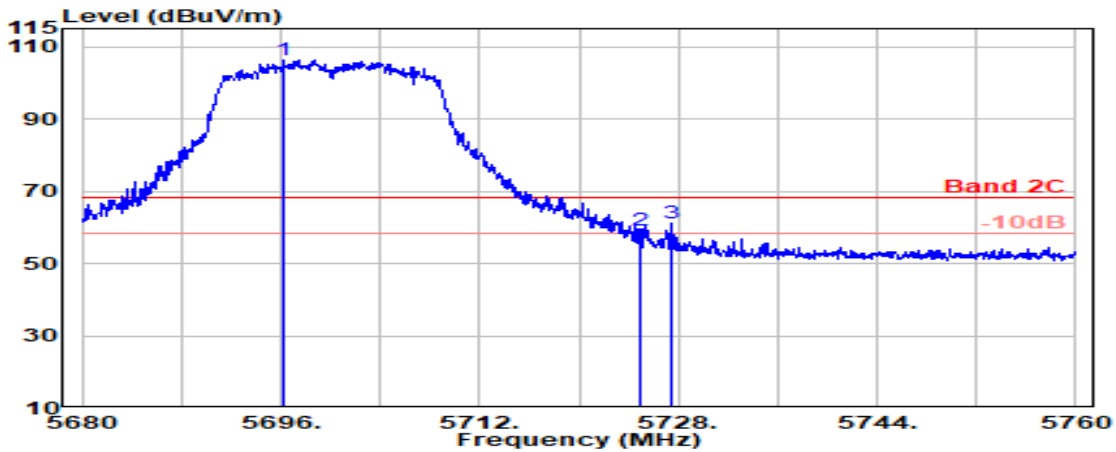


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.250	34.41	8.86	39.29	102.23	106.23	---	---	Peak
5725.000	34.45	8.88	39.29	55.20	59.24	68.20	8.96	Peak
5727.450	34.46	8.88	39.29	57.08	61.12	68.20	7.08	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

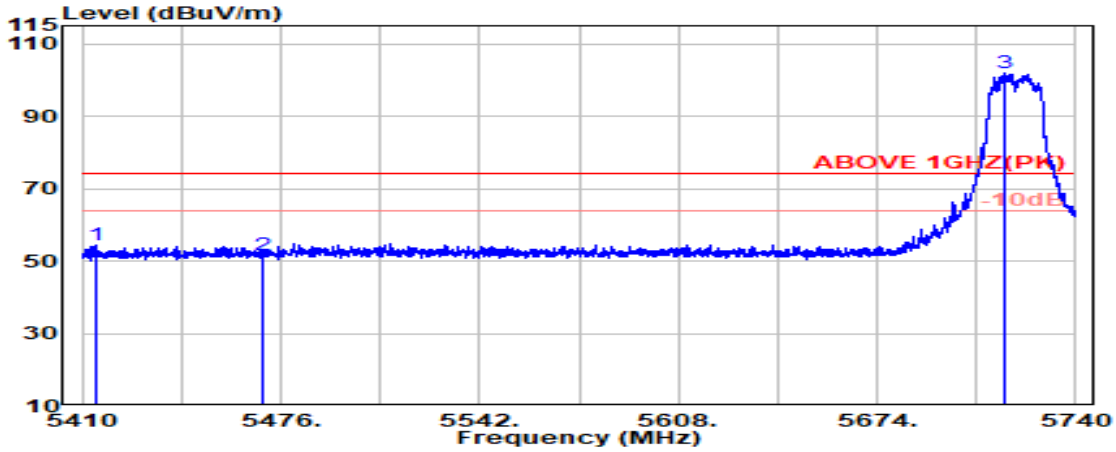

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.000	34.44	8.88	39.29	97.12	101.15	---	---	Peak
5850.000	34.70	8.95	39.31	48.31	52.64	68.20	15.56	Peak
5892.600	34.79	8.97	39.32	50.02	54.45	68.20	13.75	Peak

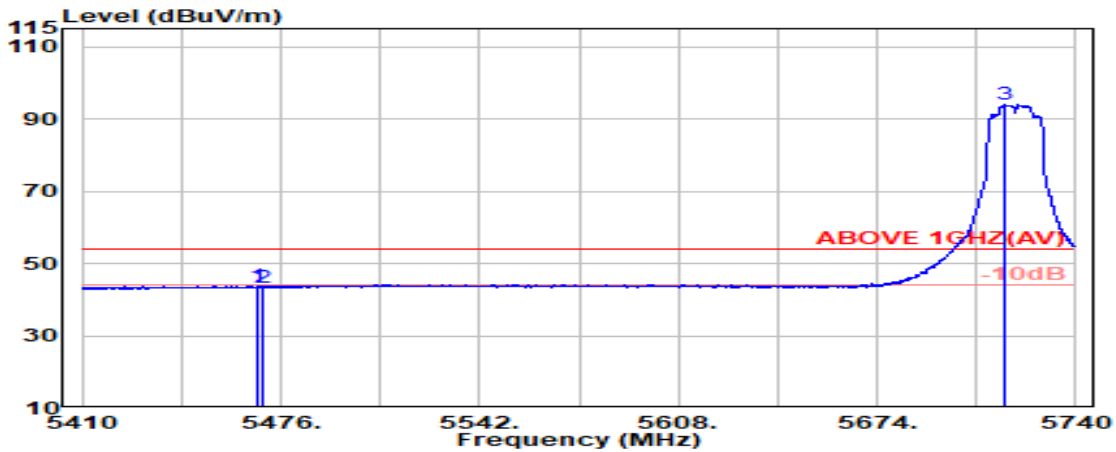


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.500	34.44	8.88	39.29	105.25	109.27	---	---	Peak
5850.000	34.70	8.95	39.31	48.29	52.62	68.20	15.58	Peak
5882.400	34.76	8.97	39.32	50.32	54.73	68.20	13.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

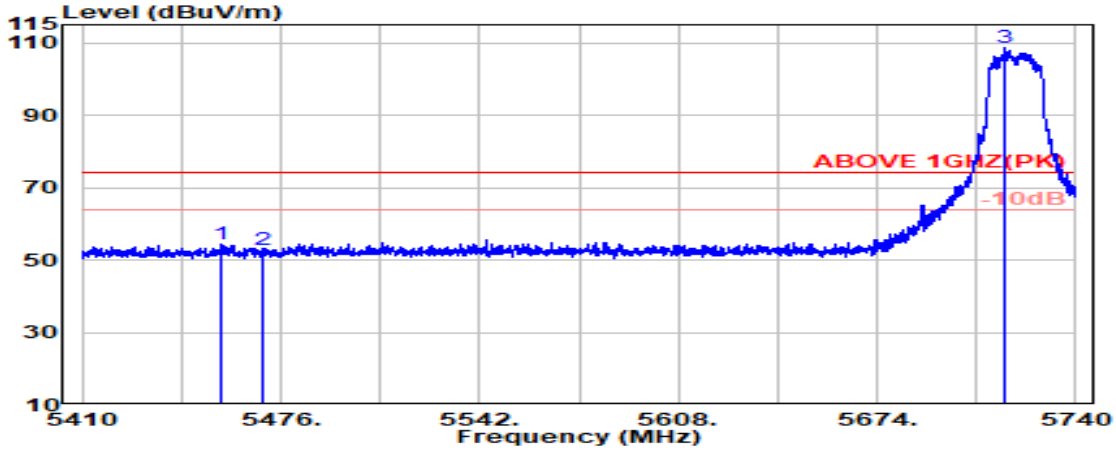

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.800	34.63	8.70	39.25	50.38	54.46	74.00	19.54	Peak
5470.000	34.78	8.74	39.25	47.23	51.49	74.00	22.51	Peak
@ 5716.400	34.43	8.88	39.29	97.86	101.88	---	---	Peak

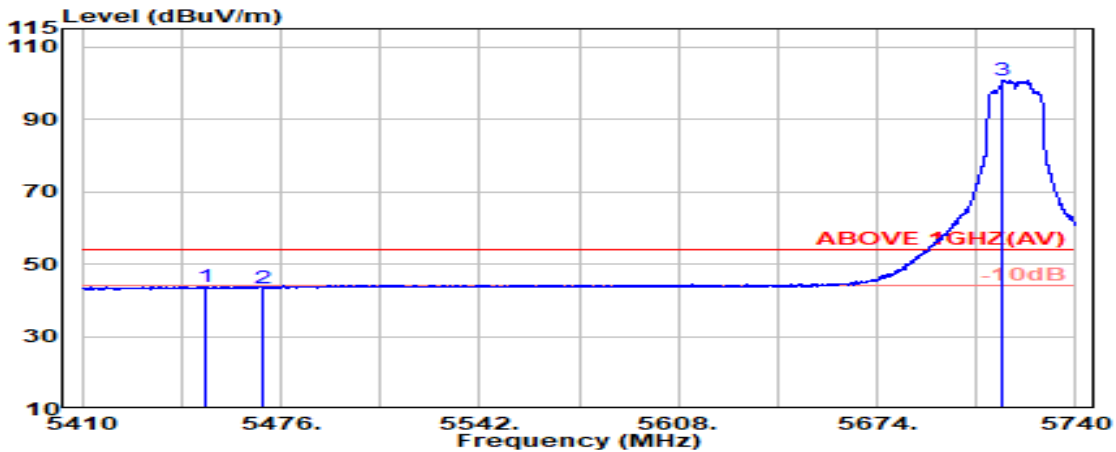


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.77	8.73	39.25	39.39	43.65	54.00	10.35	Average
5470.000	34.78	8.74	39.25	39.18	43.44	54.00	10.56	Average
@ 5716.100	34.43	8.88	39.29	89.89	93.91	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

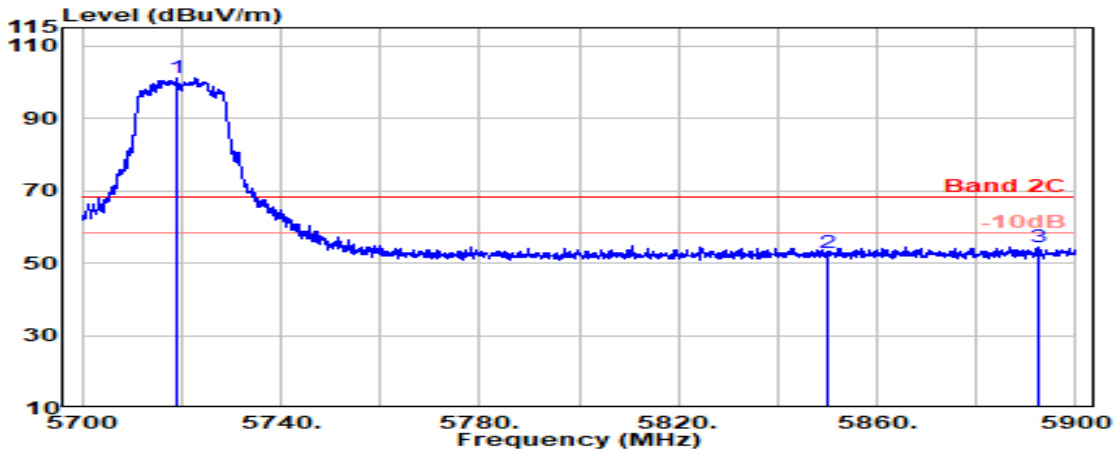

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.73	8.73	39.25	50.21	54.41	74.00	19.59	Peak
5470.000	34.78	8.74	39.25	48.36	52.62	74.00	21.38	Peak
@ 5716.300	34.43	8.88	39.29	104.47	108.49	---	---	Peak

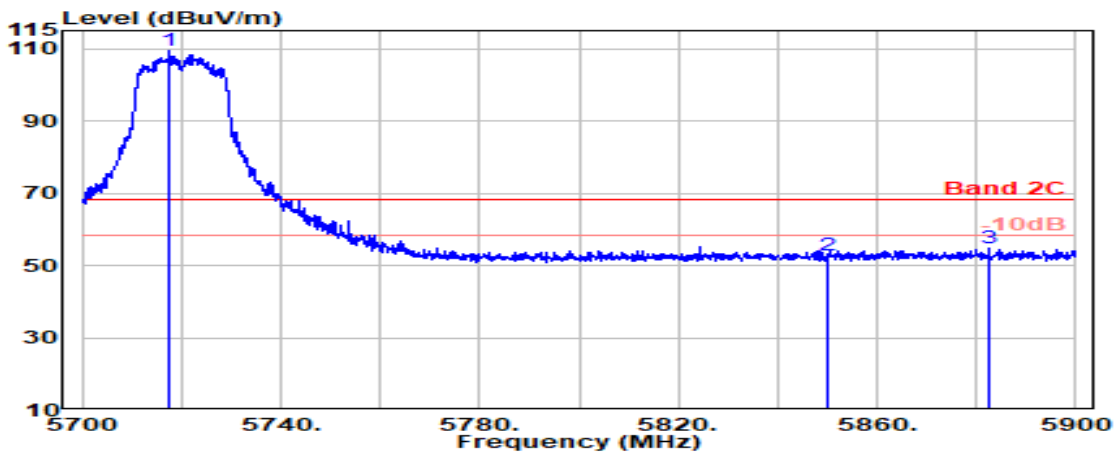


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.700	34.70	8.72	39.25	39.56	43.73	54.00	10.27	Average
5470.000	34.78	8.74	39.25	39.15	43.41	54.00	10.59	Average
@ 5715.700	34.43	8.88	39.29	96.69	100.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

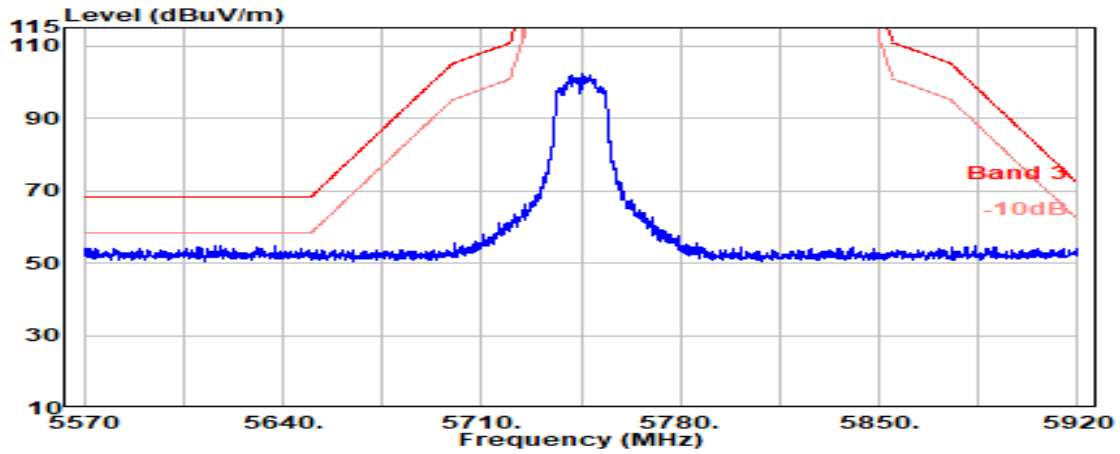


## Antenna at Vertical Polarization

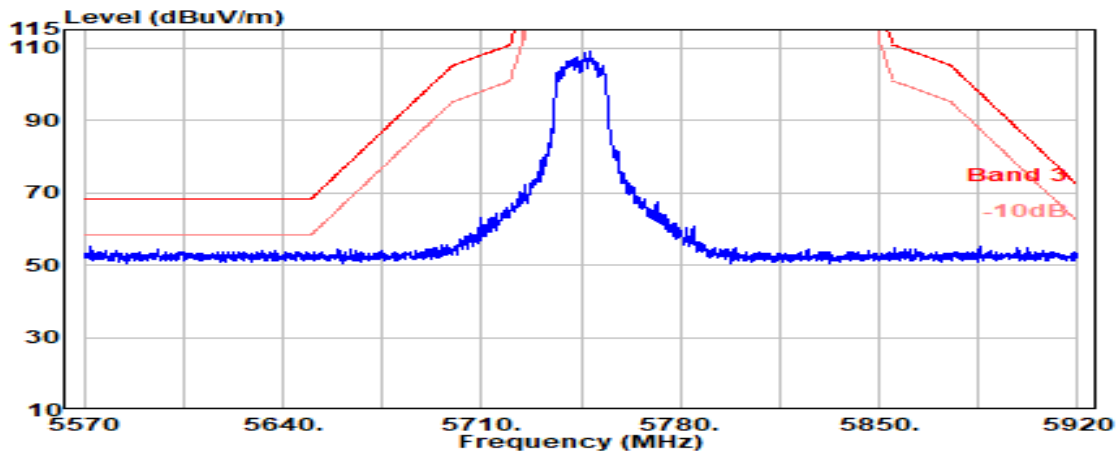


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

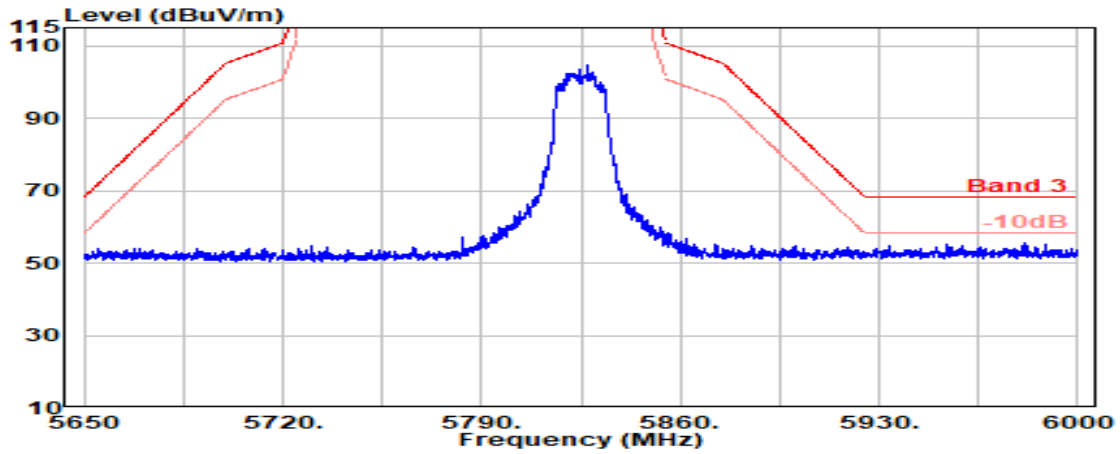

Antenna at Vertical Polarization

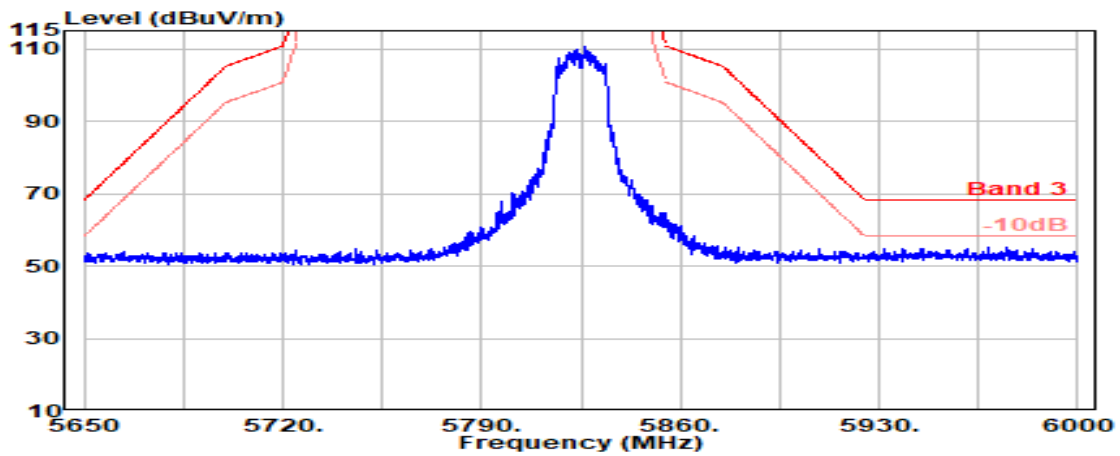


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

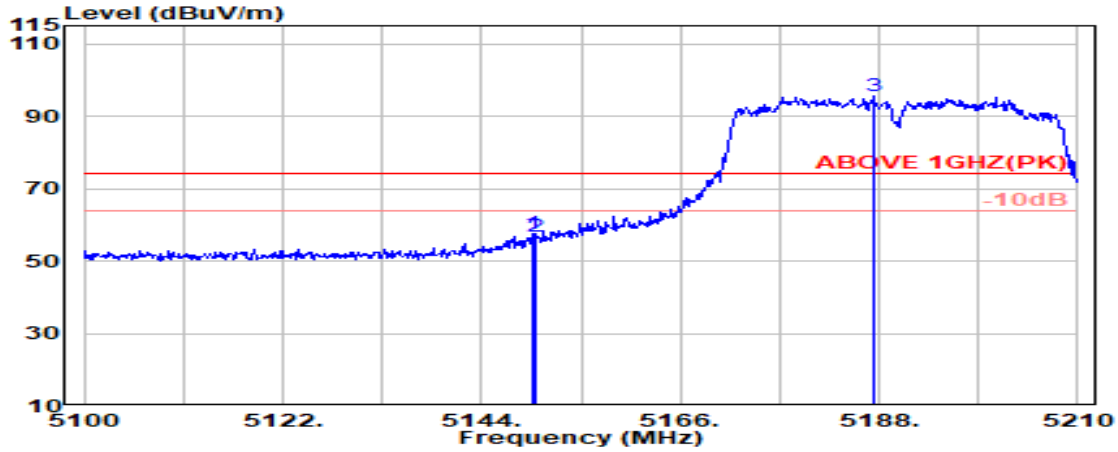

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.54	39.27	54.11	57.58	74.00	16.42	Peak
5150.000	34.20	8.54	39.27	53.11	56.59	74.00	17.41	Peak
@ 5187.340	34.27	8.57	39.27	91.93	95.50	---	---	Peak

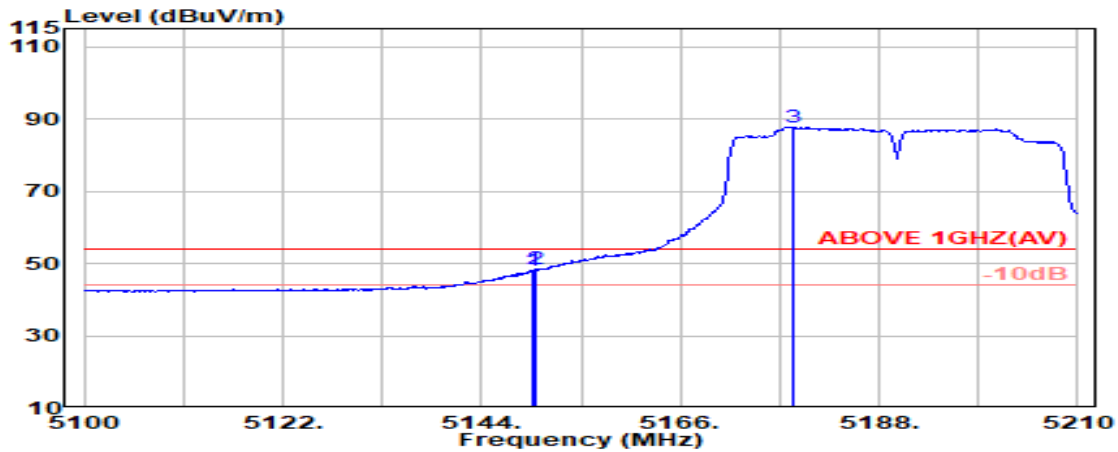


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.54	39.27	44.60	48.07	54.00	5.93	Average
5150.000	34.20	8.54	39.27	44.77	48.25	54.00	5.75	Average
@ 5178.430	34.26	8.56	39.27	84.28	87.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

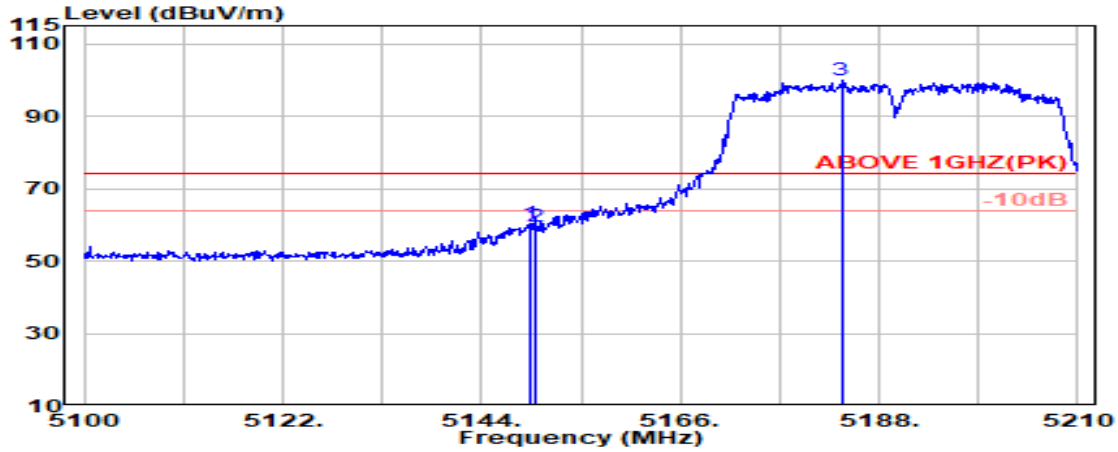

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	8.54	39.27	56.99	60.46	74.00	13.54	Peak
5150.000	34.20	8.54	39.27	55.88	59.35	74.00	14.65	Peak
@ 5183.820	34.27	8.56	39.27	96.31	99.88	---	---	Peak

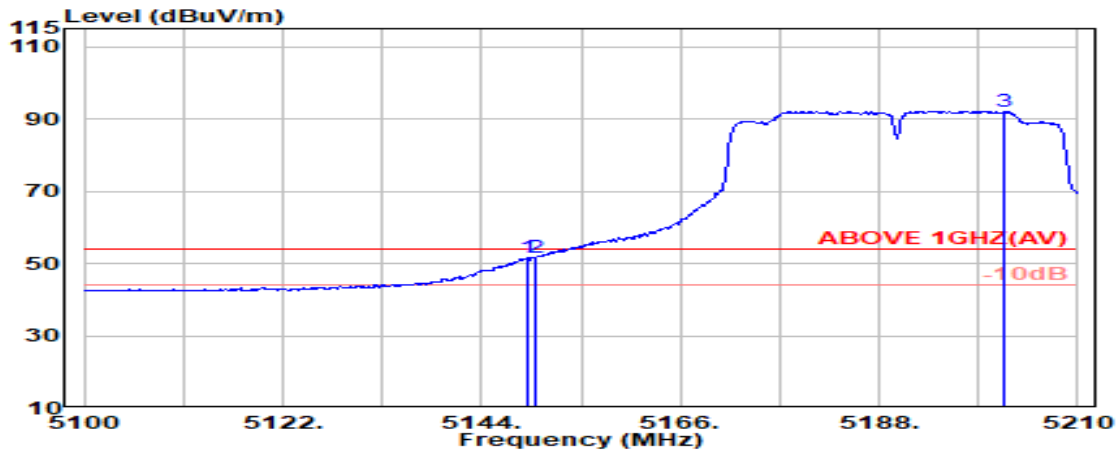


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.54	39.27	48.14	51.61	54.00	2.39	Average
5150.000	34.20	8.54	39.27	48.25	51.73	54.00	2.27	Average
@ 5201.970	34.30	8.58	39.27	88.60	92.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

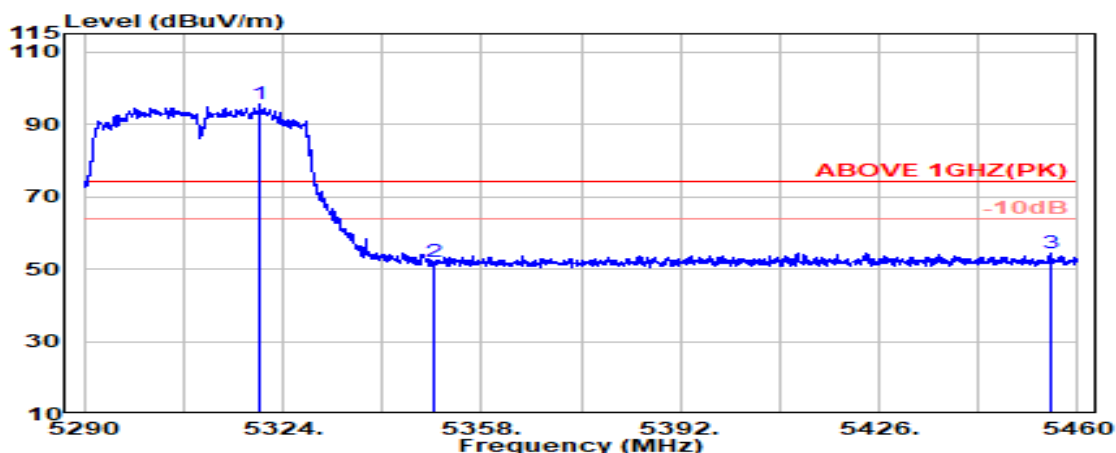

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.000	34.56	8.65	39.26	91.56	95.50	---	---	Peak
5350.000	34.50	8.67	39.26	47.93	51.84	74.00	22.16	Peak
5455.200	34.72	8.73	39.25	50.16	54.35	74.00	19.65	Peak

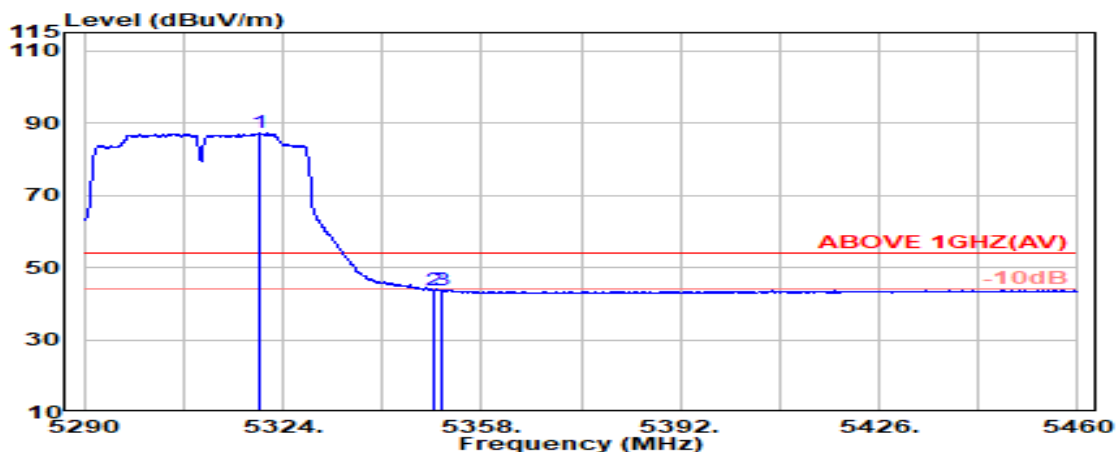


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.900	34.56	8.65	39.26	83.26	87.21	---	---	Average
5350.000	34.50	8.67	39.26	39.78	43.68	54.00	10.32	Average
5351.100	34.50	8.67	39.26	39.83	43.74	54.00	10.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

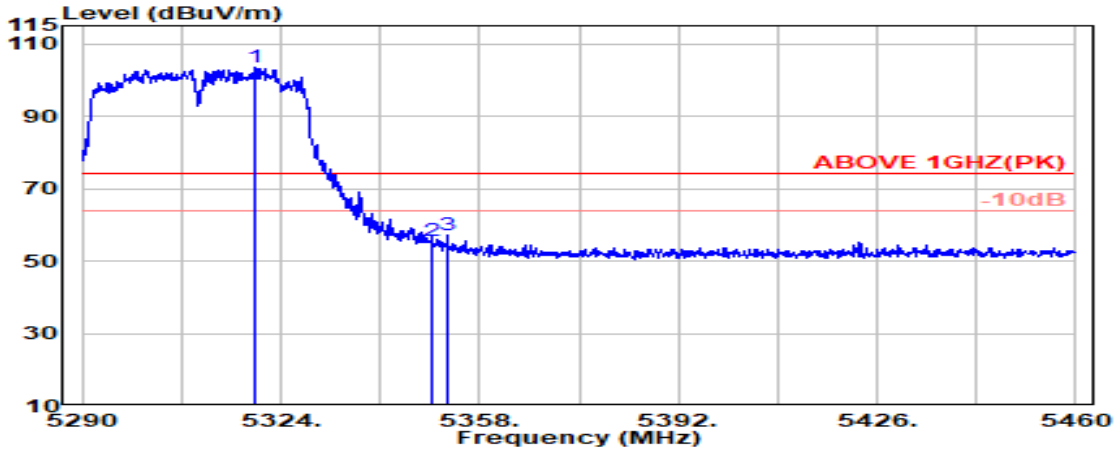

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.700	34.56	8.65	39.26	99.59	103.54	---	---	Peak
5350.000	34.50	8.67	39.26	51.62	55.53	74.00	18.47	Peak
5352.500	34.51	8.67	39.26	53.36	57.27	74.00	16.73	Peak

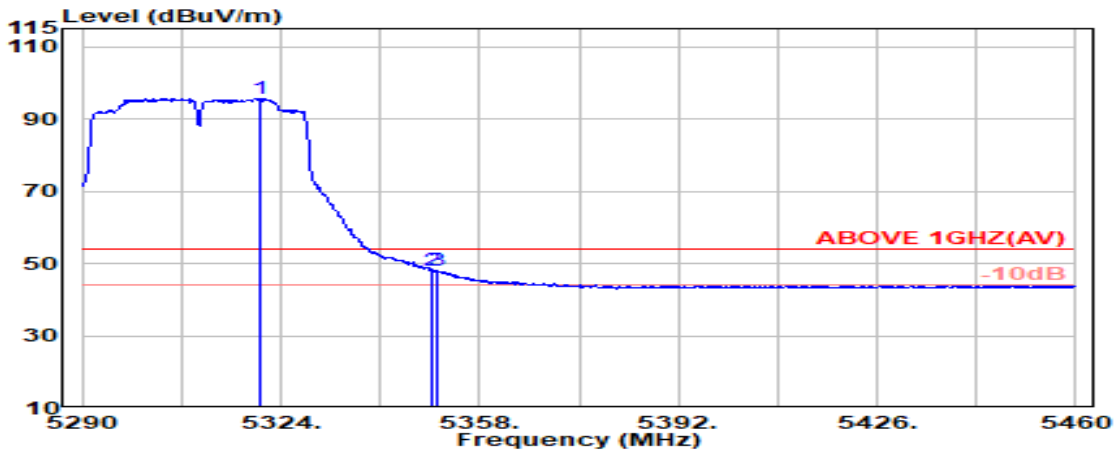


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.500	34.56	8.65	39.26	91.70	95.65	---	---	Average
5350.000	34.50	8.67	39.26	44.02	47.92	54.00	6.08	Average
5350.700	34.50	8.67	39.26	43.99	47.90	54.00	6.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

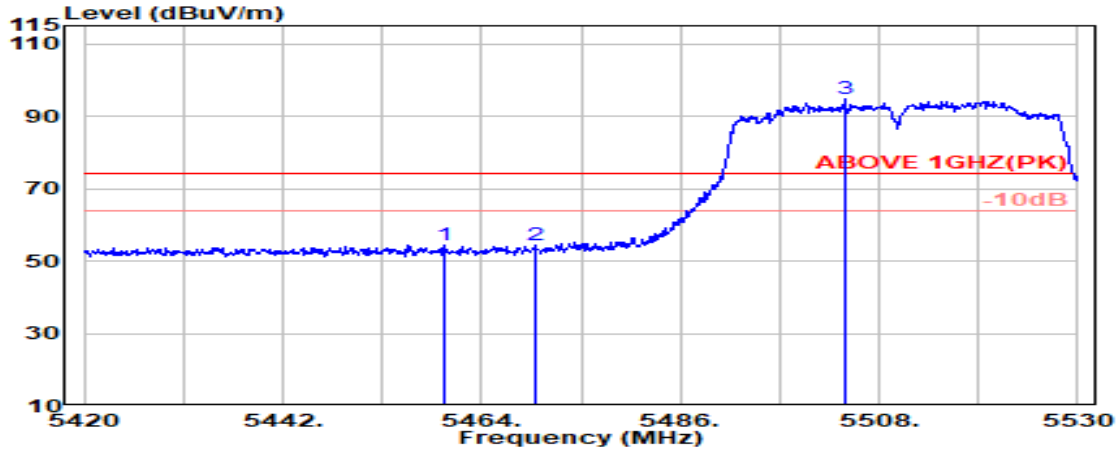

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.74	8.73	39.25	50.07	54.29	74.00	19.71	Peak
5470.000	34.78	8.74	39.25	50.07	54.33	74.00	19.67	Peak
@ 5504.200	34.89	8.76	39.25	90.29	94.69	---	---	Peak

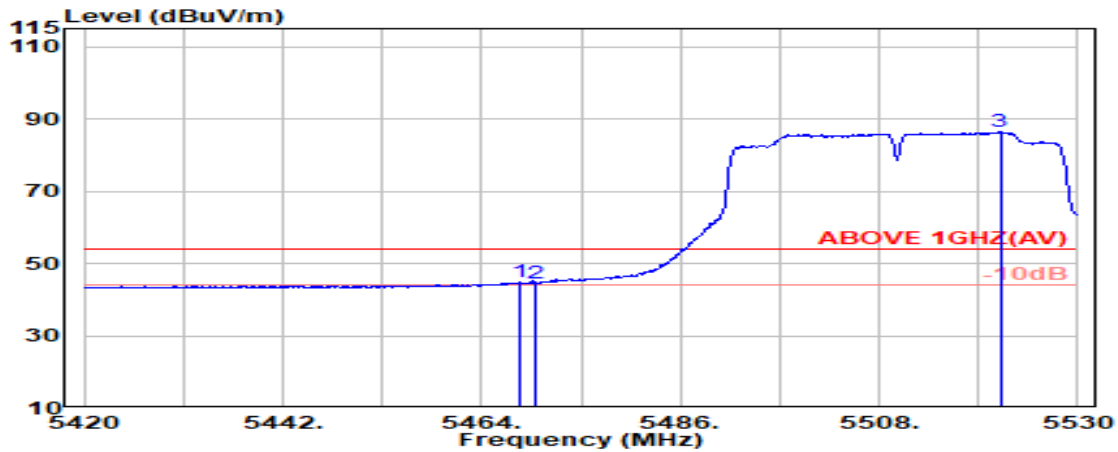


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.77	8.73	39.25	40.60	44.85	54.00	9.15	Average
5470.000	34.78	8.74	39.25	40.36	44.62	54.00	9.38	Average
@ 5521.400	34.86	8.77	39.25	82.01	86.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

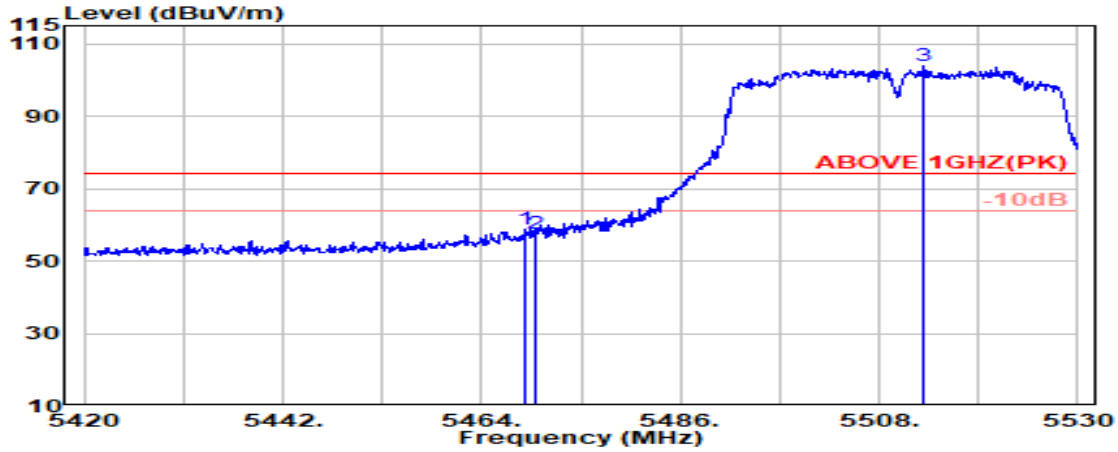

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	54.43	58.69	74.00	15.31	Peak
5470.000	34.78	8.74	39.25	53.33	57.59	74.00	16.41	Peak
@ 5513.000	34.87	8.76	39.25	99.34	103.73	---	---	Peak

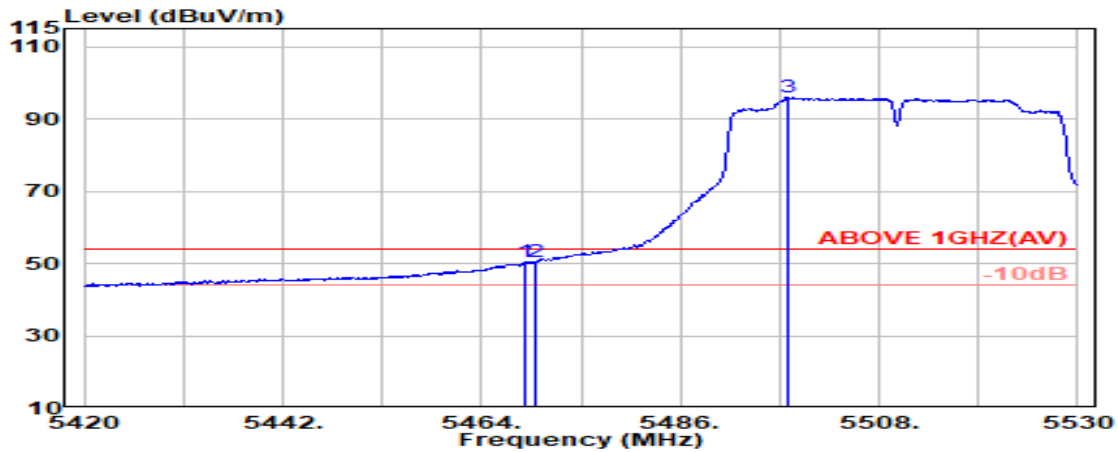


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	46.11	50.37	54.00	3.63	Average
5470.000	34.78	8.74	39.25	46.14	50.40	54.00	3.60	Average
@ 5497.800	34.89	8.75	39.25	91.48	95.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

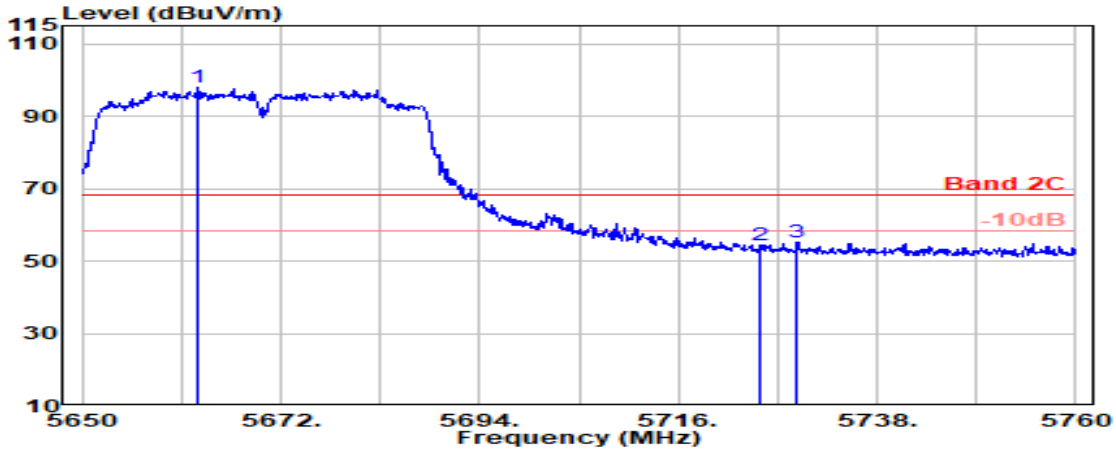

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.800	34.55	8.85	39.28	93.78	97.89	---	---	Peak
5725.000	34.45	8.88	39.29	50.28	54.32	68.20	13.88	Peak
5729.200	34.46	8.88	39.29	51.14	55.18	68.20	13.02	Peak

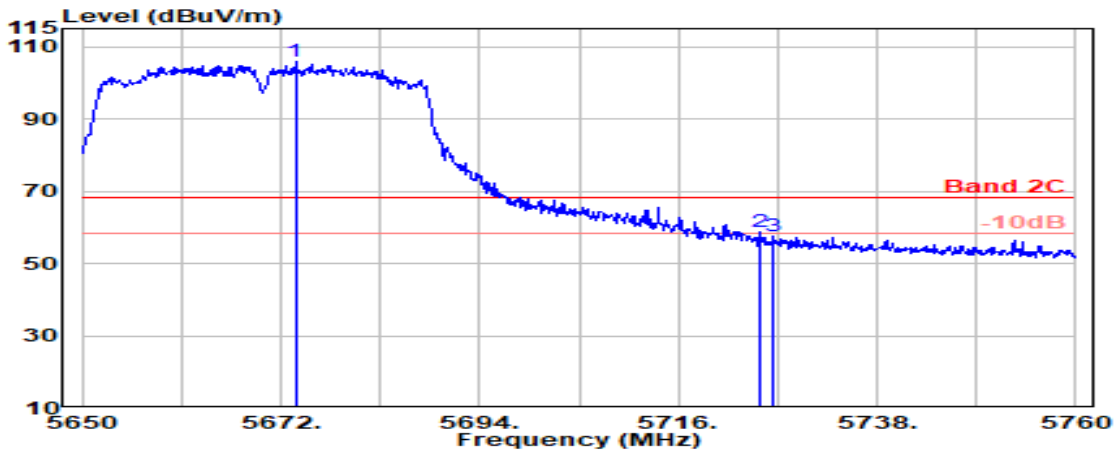


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.600	34.51	8.85	39.28	101.73	105.81	---	---	Peak
5725.000	34.45	8.88	39.29	54.76	58.80	68.20	9.40	Peak
5726.500	34.45	8.88	39.29	53.63	57.67	68.20	10.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

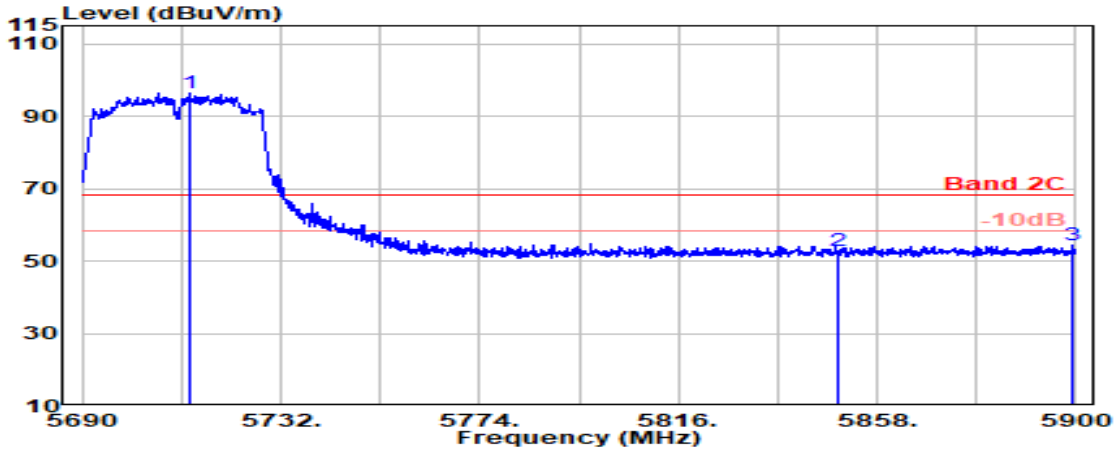

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.600	34.43	8.87	39.29	92.25	96.26	---	---	Peak
5850.000	34.70	8.95	39.31	48.59	52.93	68.20	15.27	Peak
5899.200	34.80	8.98	39.32	49.83	54.28	68.20	13.92	Peak

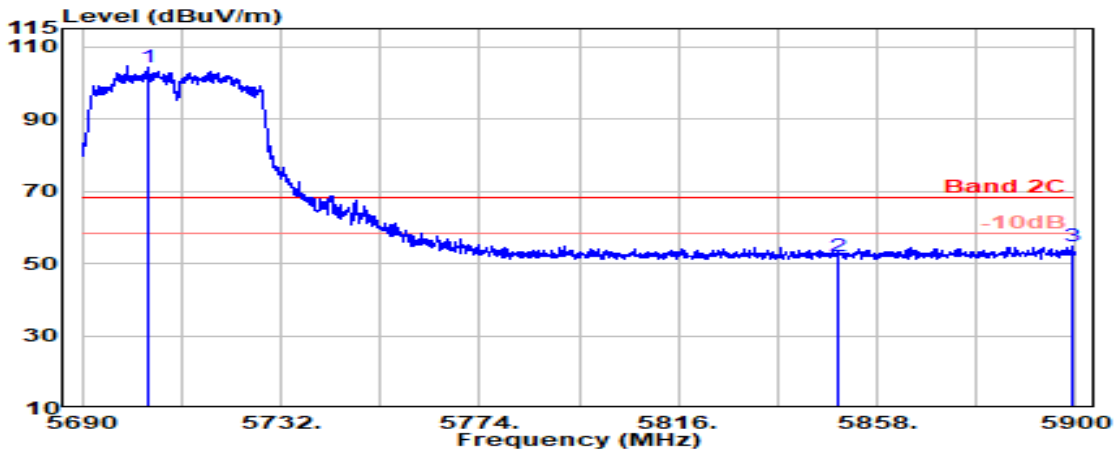


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.000	34.41	8.87	39.29	100.17	104.16	---	---	Peak
5850.000	34.70	8.95	39.31	47.73	52.07	68.20	16.13	Peak
5899.300	34.80	8.98	39.32	50.15	54.60	68.20	13.60	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

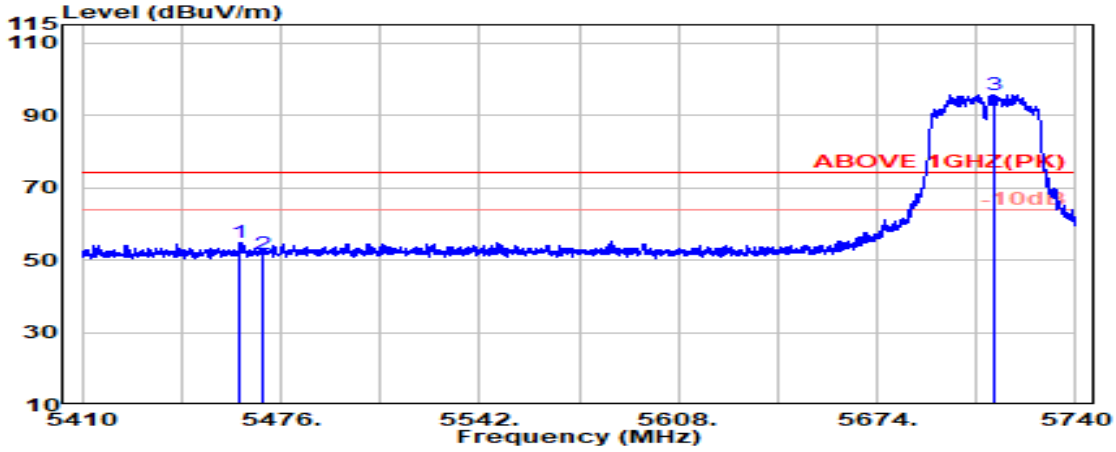

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.75	8.73	39.25	50.69	54.92	74.00	19.08	Peak
5470.000	34.78	8.74	39.25	47.26	51.52	74.00	22.48	Peak
@ 5712.800	34.43	8.87	39.29	91.75	95.76	---	---	Peak

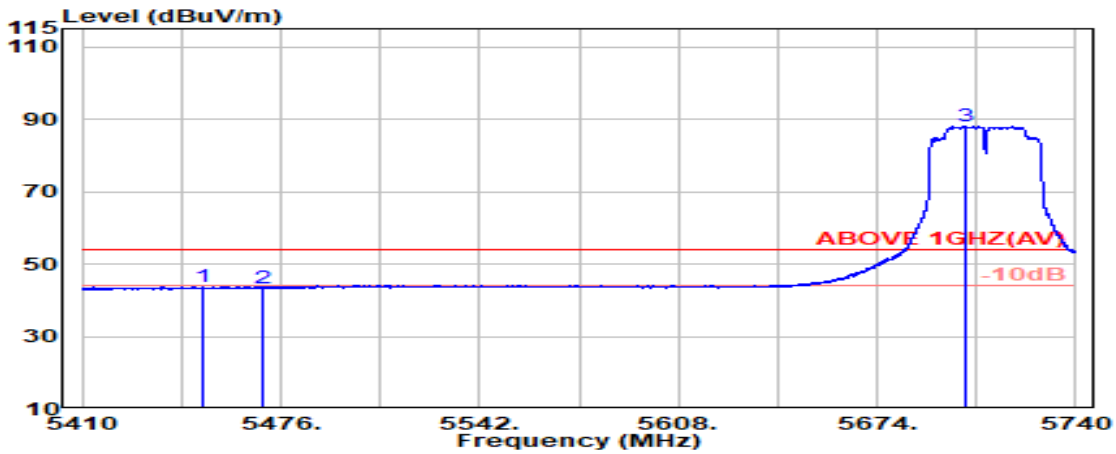


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.400	34.70	8.72	39.25	39.54	43.72	54.00	10.28	Average
5470.000	34.78	8.74	39.25	39.19	43.45	54.00	10.55	Average
@ 5703.400	34.41	8.87	39.29	83.96	87.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

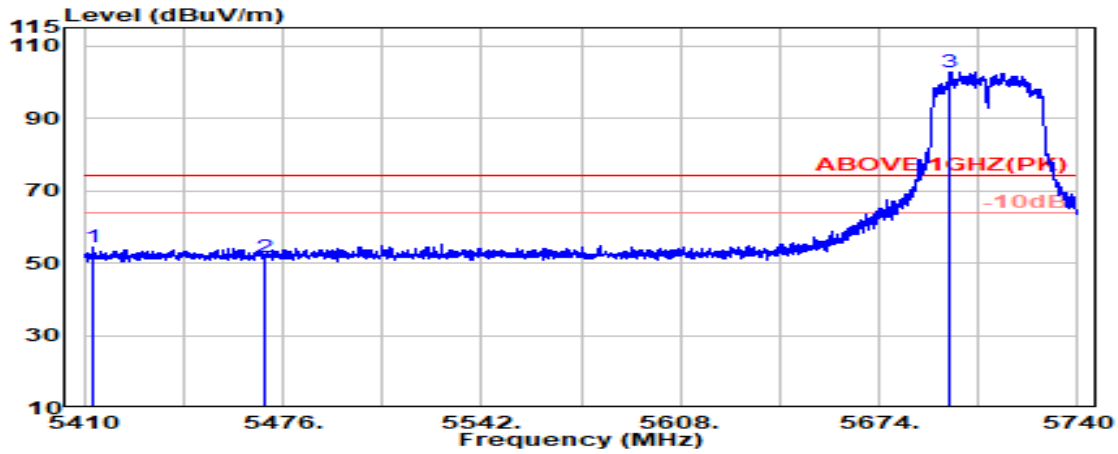

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.100	34.63	8.70	39.26	50.30	54.37	74.00	19.63	Peak
5470.000	34.78	8.74	39.25	47.32	51.59	74.00	22.41	Peak
@ 5697.700	34.41	8.87	39.29	98.83	102.82	---	---	Peak

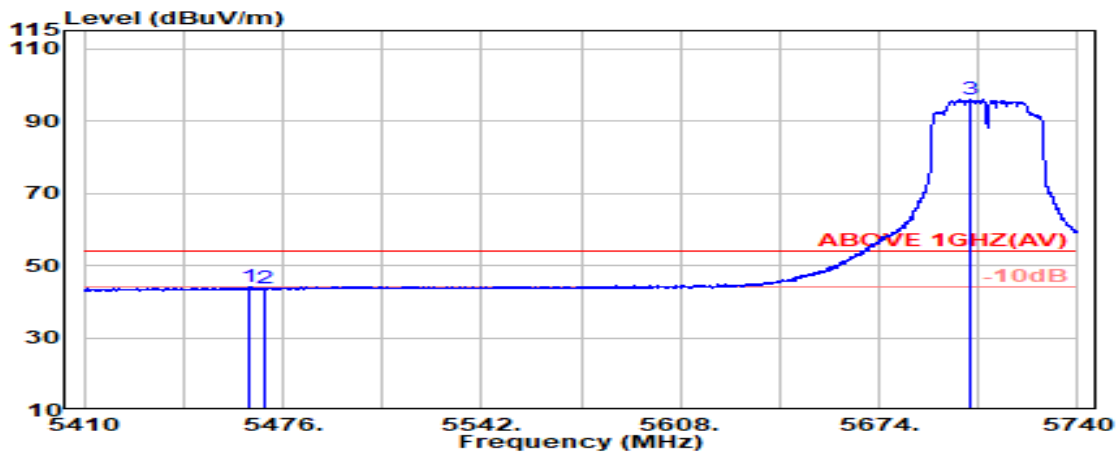


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.76	8.73	39.25	39.78	44.02	54.00	9.98	Average
5470.000	34.78	8.74	39.25	39.39	43.65	54.00	10.35	Average
@ 5704.500	34.41	8.87	39.29	91.91	95.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

## Antenna at Horizontal Polarization

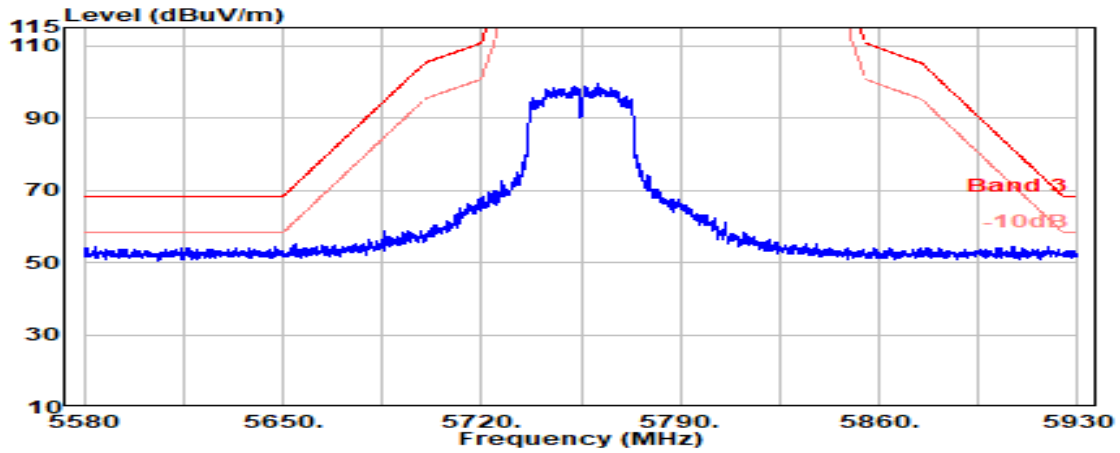


## Antenna at Vertical Polarization

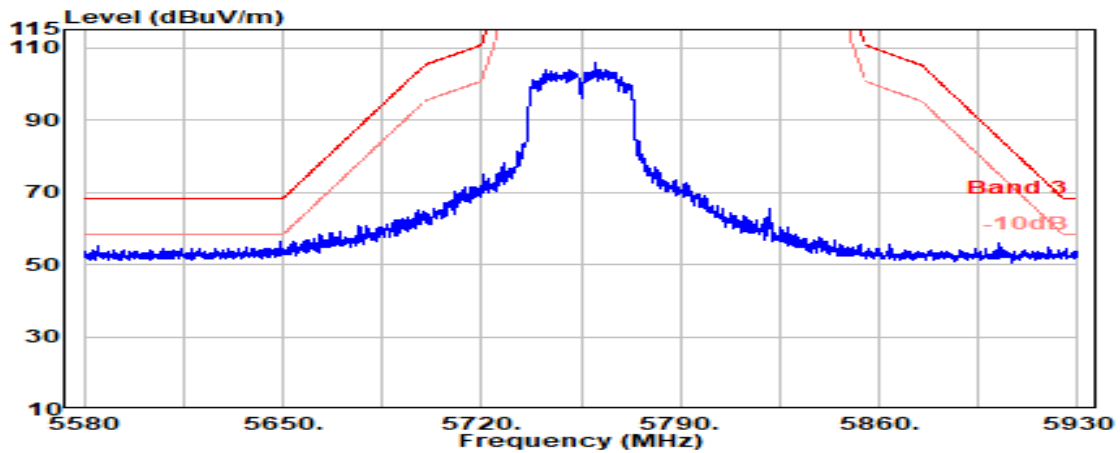




Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

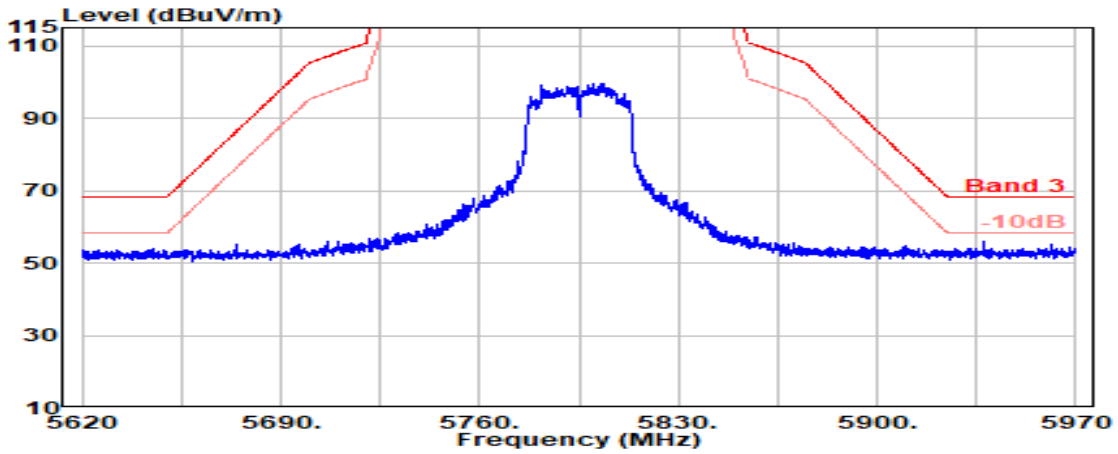

Antenna at Vertical Polarization

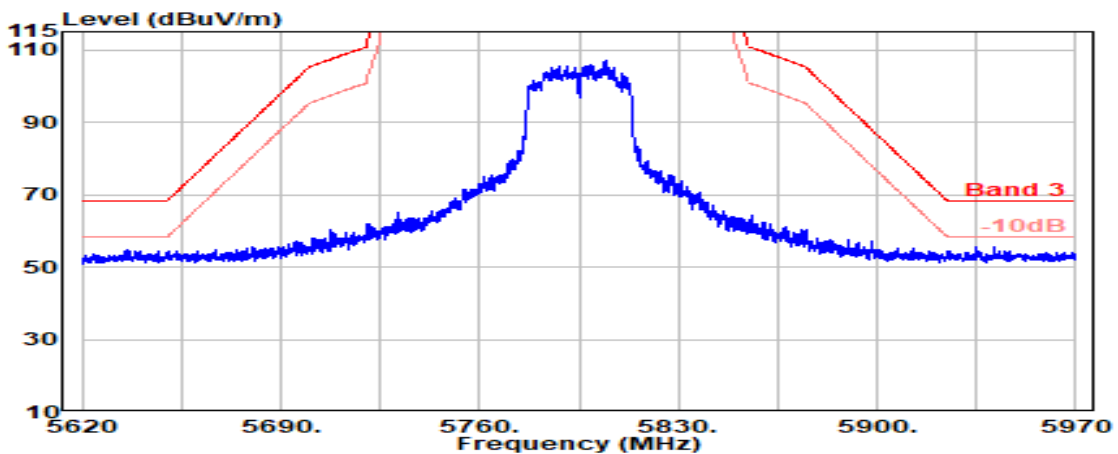


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

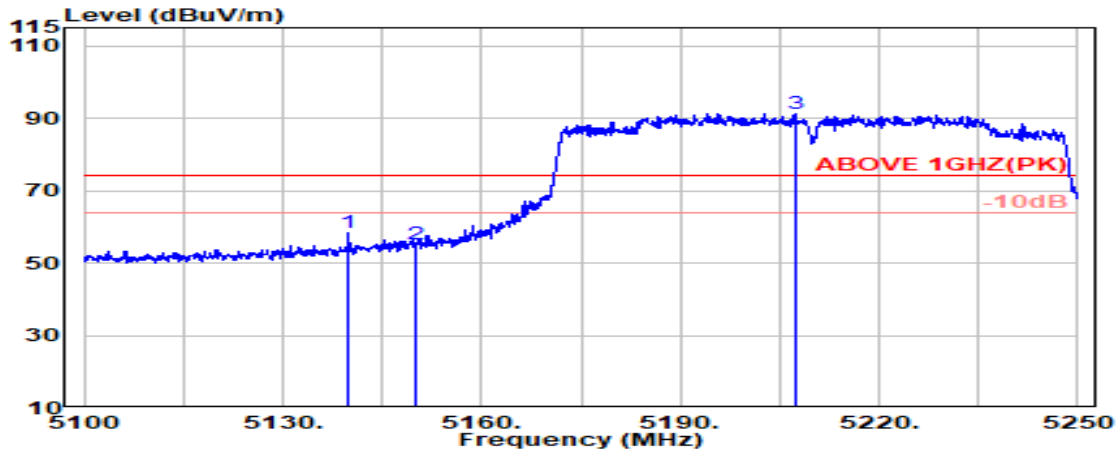

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.000	34.16	8.54	39.27	54.76	58.19	74.00	15.81	Peak
5150.000	34.20	8.54	39.27	51.60	55.07	74.00	18.93	Peak
@ 5207.500	34.32	8.58	39.27	87.78	91.41	---	---	Peak

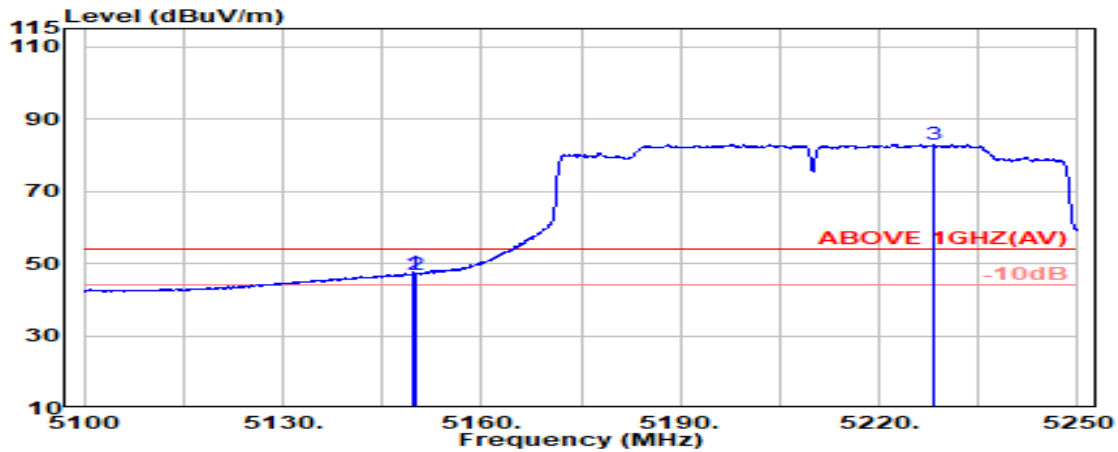


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.54	39.27	43.97	47.44	54.00	6.56	Average
5150.000	34.20	8.54	39.27	43.41	46.89	54.00	7.11	Average
@ 5228.200	34.36	8.59	39.27	79.29	82.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

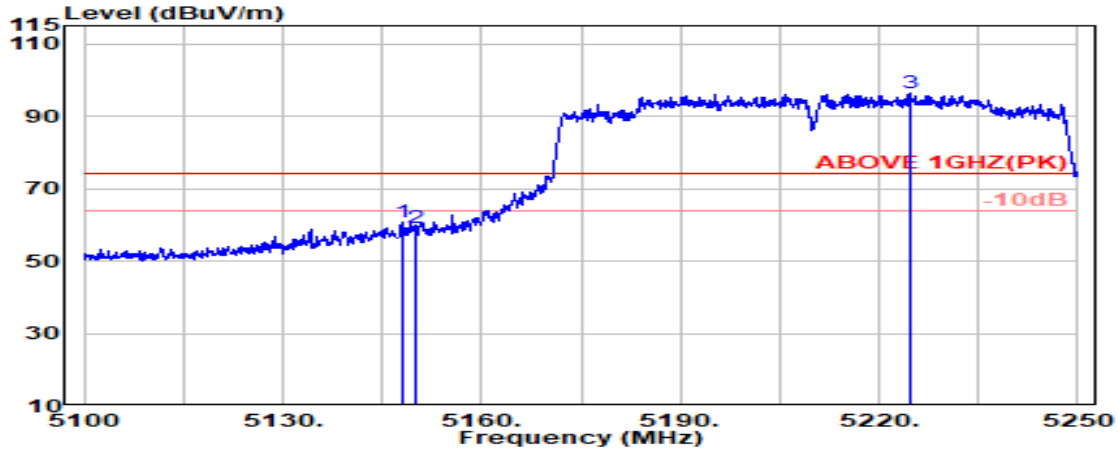

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.19	8.54	39.27	57.11	60.58	74.00	13.42	Peak
5150.000	34.20	8.54	39.27	55.48	58.95	74.00	15.05	Peak
@ 5224.700	34.35	8.59	39.27	92.62	96.30	---	---	Peak

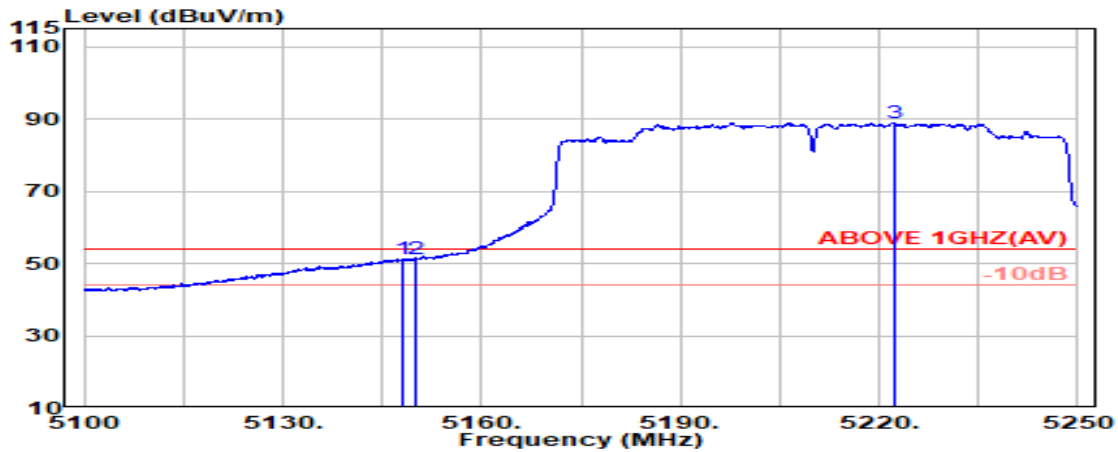


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.19	8.54	39.27	47.66	51.13	54.00	2.87	Average
5150.000	34.20	8.54	39.27	47.89	51.36	54.00	2.64	Average
@ 5222.200	34.34	8.59	39.27	85.38	89.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

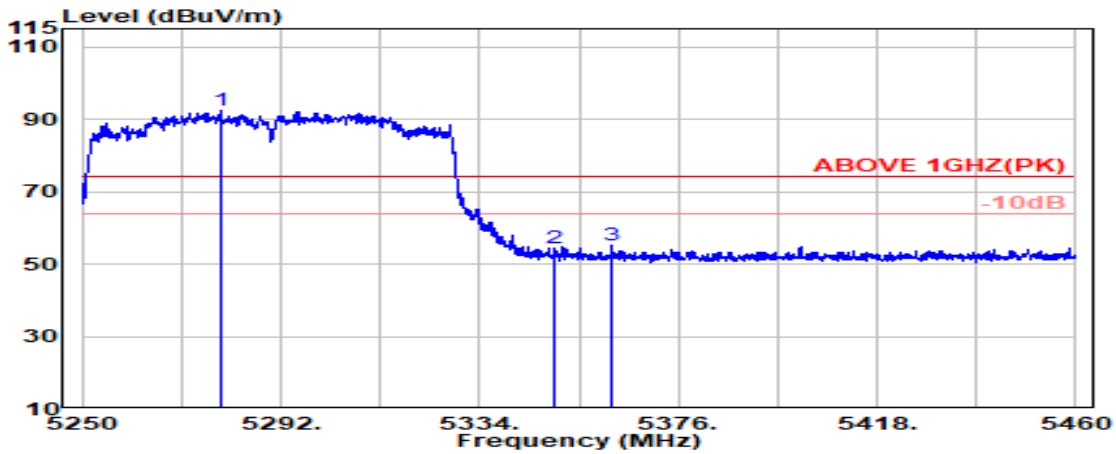

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.200	34.52	8.62	39.26	88.72	92.59	---	---	Peak
5350.000	34.50	8.67	39.26	50.27	54.18	74.00	19.82	Peak
5361.900	34.52	8.67	39.26	51.09	55.03	74.00	18.97	Peak

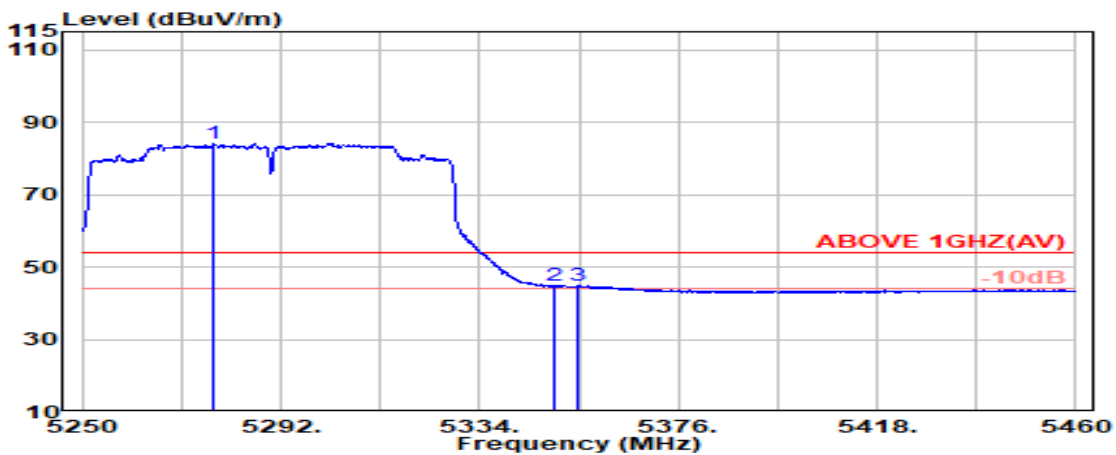


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.800	34.51	8.62	39.26	80.33	84.20	---	---	Average
5350.000	34.50	8.67	39.26	40.92	44.83	54.00	9.17	Average
5354.700	34.51	8.67	39.26	41.08	45.00	54.00	9.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

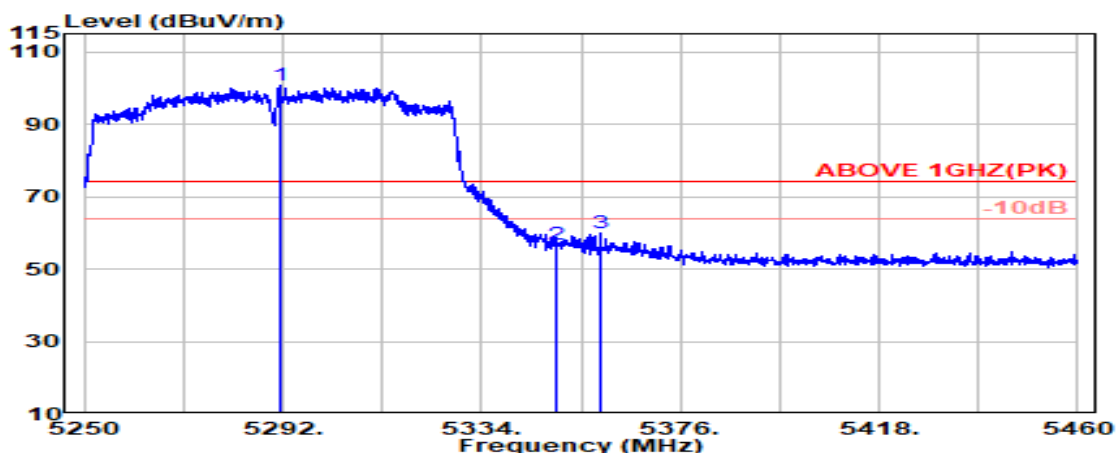

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.600	34.57	8.63	39.26	96.78	100.72	---	---	Peak
5350.000	34.50	8.67	39.26	52.76	56.67	74.00	17.33	Peak
5359.200	34.52	8.67	39.26	55.95	59.88	74.00	14.12	Peak

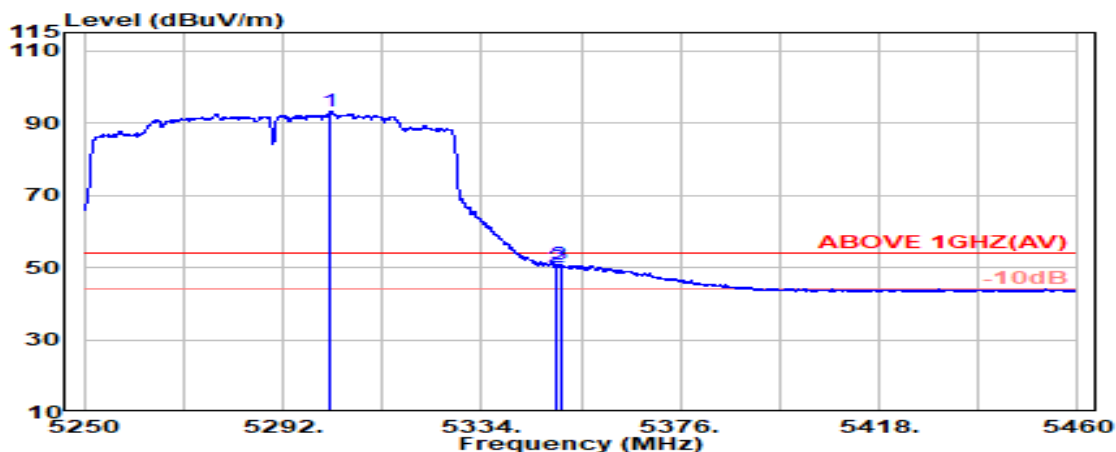


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	34.60	8.64	39.26	89.28	93.25	---	---	Average
5350.000	34.50	8.67	39.26	46.13	50.04	54.00	3.96	Average
5350.600	34.50	8.67	39.26	47.00	50.90	54.00	3.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

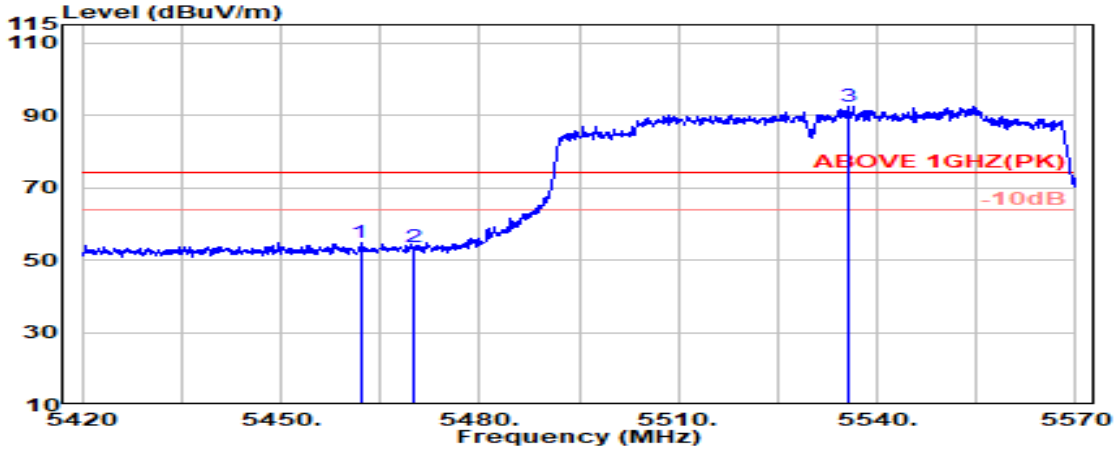

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.75	8.73	39.25	50.62	54.85	74.00	19.15	Peak
5470.000	34.78	8.74	39.25	49.29	53.56	74.00	20.44	Peak
@ 5535.500	34.83	8.77	39.26	88.20	92.55	---	---	Peak

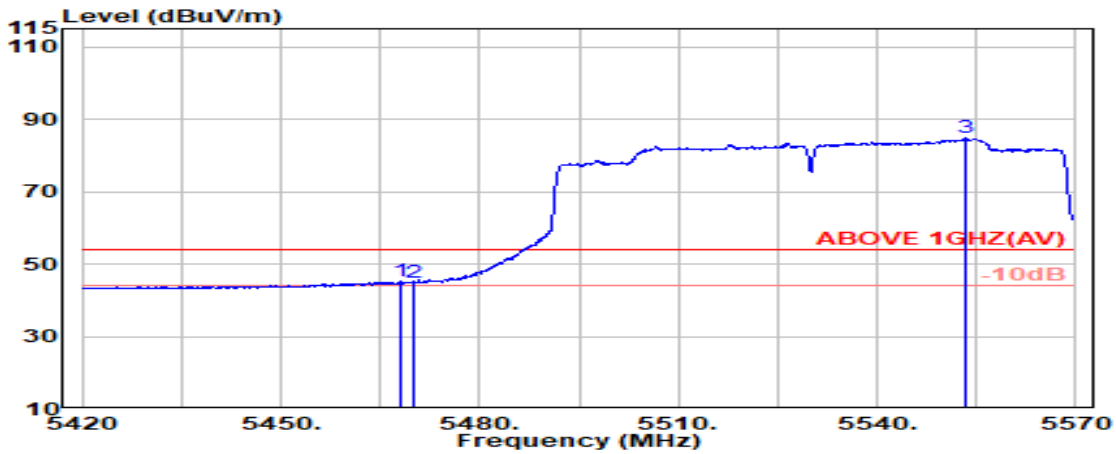


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.77	8.73	39.25	40.82	45.07	54.00	8.93	Average
5470.000	34.78	8.74	39.25	40.67	44.93	54.00	9.07	Average
@ 5553.200	34.79	8.78	39.26	80.38	84.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

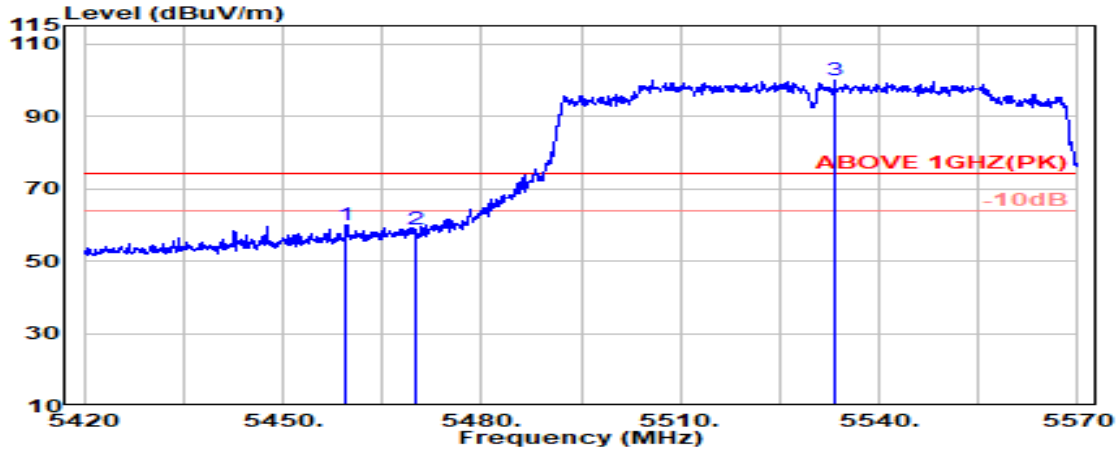

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.74	8.73	39.25	55.89	60.11	74.00	13.89	Peak
5470.000	34.78	8.74	39.25	54.58	58.84	74.00	15.16	Peak
@ 5533.400	34.83	8.77	39.26	95.77	100.12	---	---	Peak

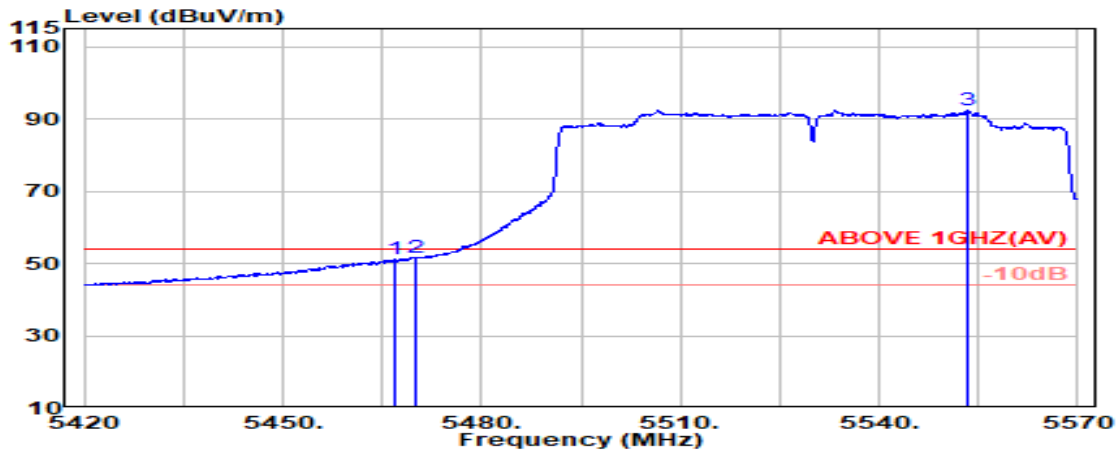


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.77	8.73	39.25	47.02	51.27	54.00	2.73	Average
5470.000	34.78	8.74	39.25	47.32	51.58	54.00	2.42	Average
@ 5553.300	34.79	8.78	39.26	88.19	92.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

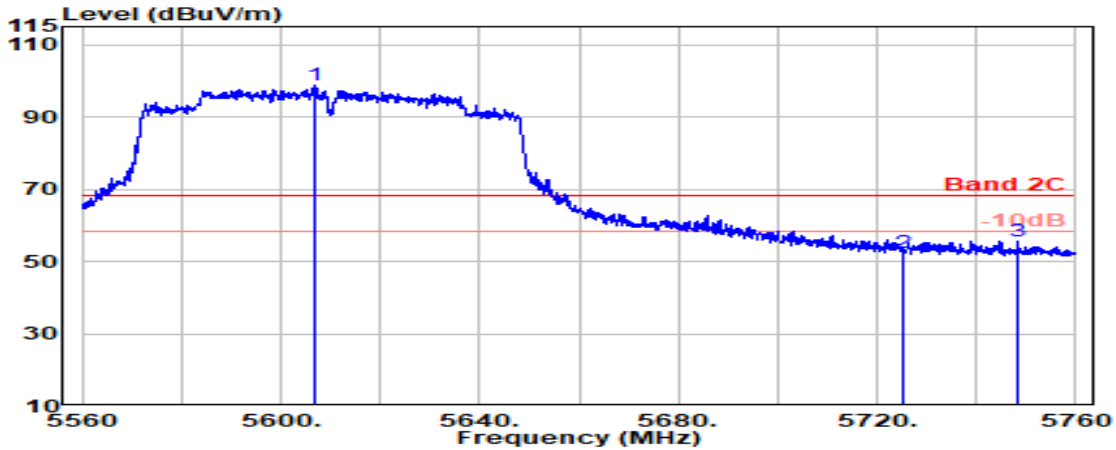

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.700	34.69	8.81	39.27	94.53	98.76	---	---	Peak
5725.000	34.45	8.88	39.29	48.48	52.52	68.20	15.68	Peak
5748.300	34.50	8.89	39.30	51.47	55.56	68.20	12.64	Peak

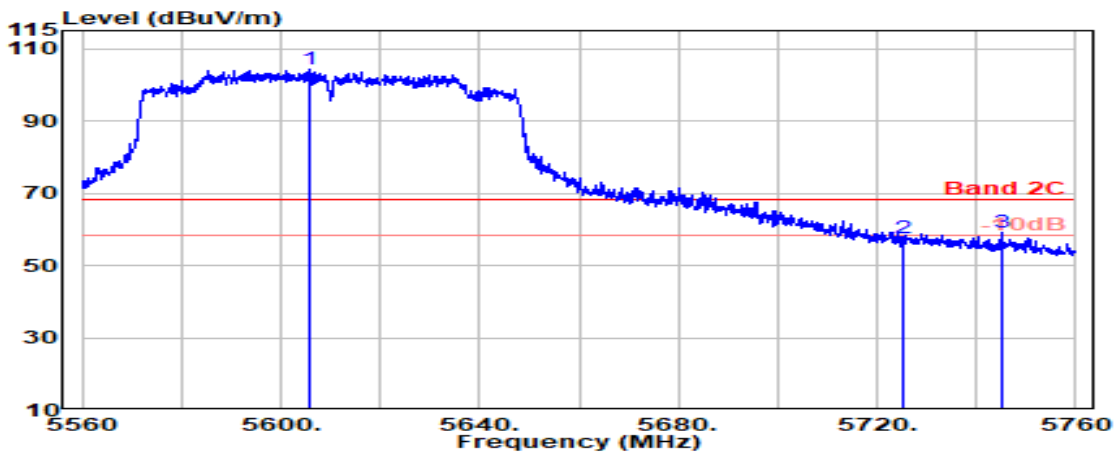


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.900	34.69	8.81	39.27	99.94	104.17	---	---	Peak
5725.000	34.45	8.88	39.29	53.60	57.64	68.20	10.56	Peak
5745.200	34.49	8.89	39.30	55.01	59.10	68.20	9.10	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

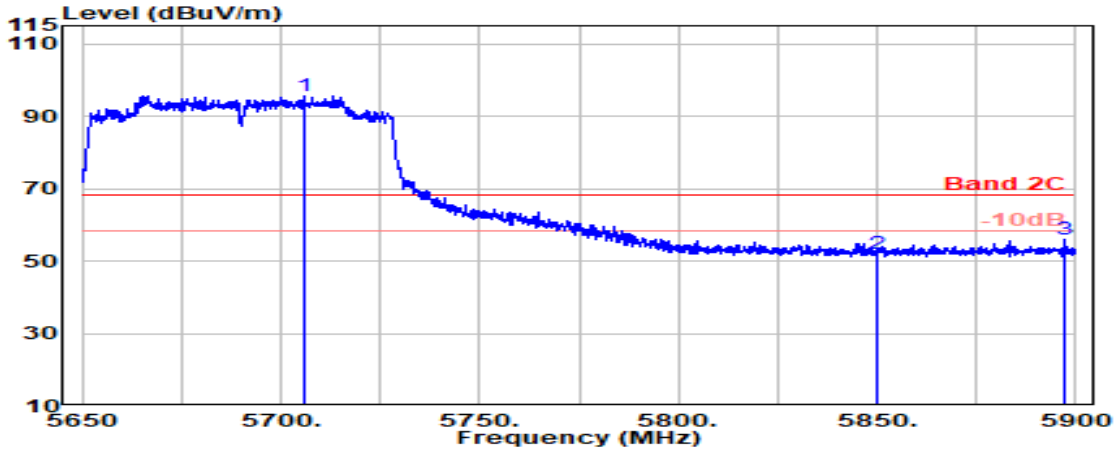

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.700	34.41	8.87	39.29	91.71	95.70	---	---	Peak
5850.000	34.70	8.95	39.31	47.74	52.07	68.20	16.13	Peak
5897.300	34.79	8.98	39.32	51.39	55.84	68.20	12.36	Peak

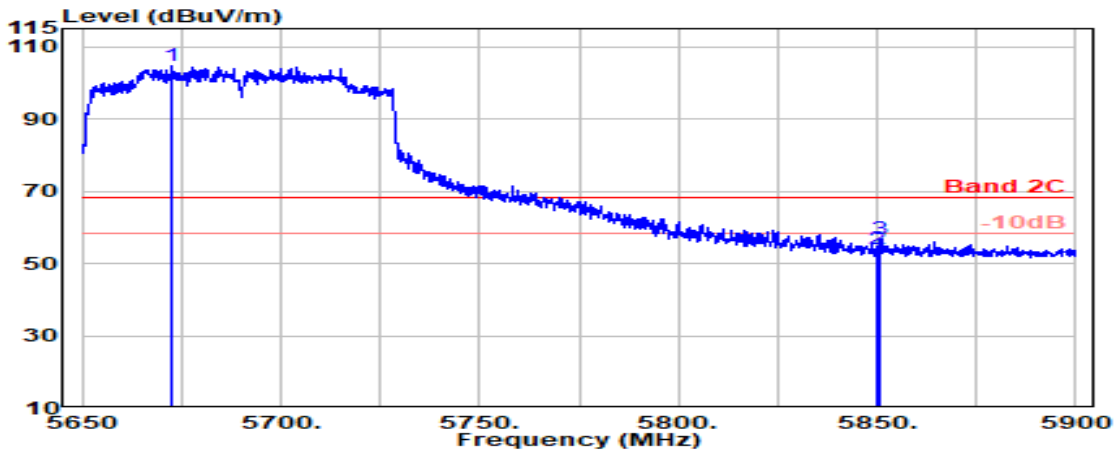


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.500	34.51	8.85	39.28	100.43	104.51	---	---	Peak
5850.000	34.70	8.95	39.31	49.84	54.17	68.20	14.03	Peak
5850.900	34.70	8.95	39.31	52.33	56.67	68.20	11.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

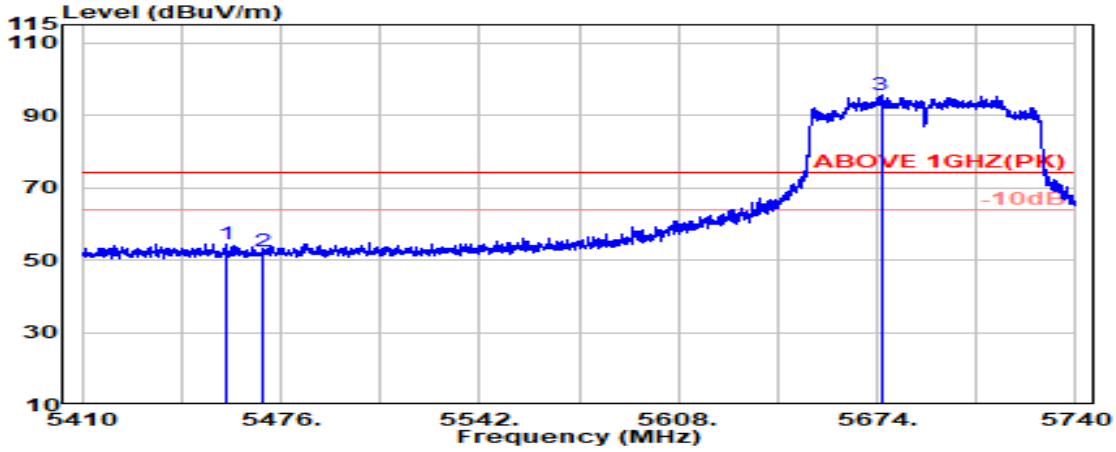

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.73	8.73	39.25	50.19	54.39	74.00	19.61	Peak
5470.000	34.78	8.74	39.25	48.22	52.49	74.00	21.51	Peak
@ 5675.300	34.50	8.85	39.28	91.43	95.50	---	---	Peak

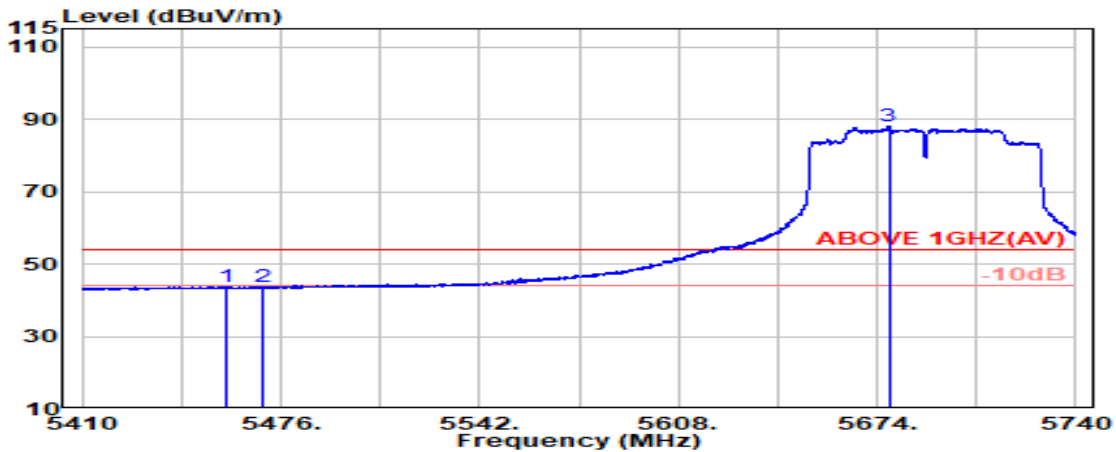


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.73	8.73	39.25	39.50	43.71	54.00	10.29	Average
5470.000	34.78	8.74	39.25	39.32	43.58	54.00	10.42	Average
@ 5677.900	34.49	8.85	39.28	83.98	88.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

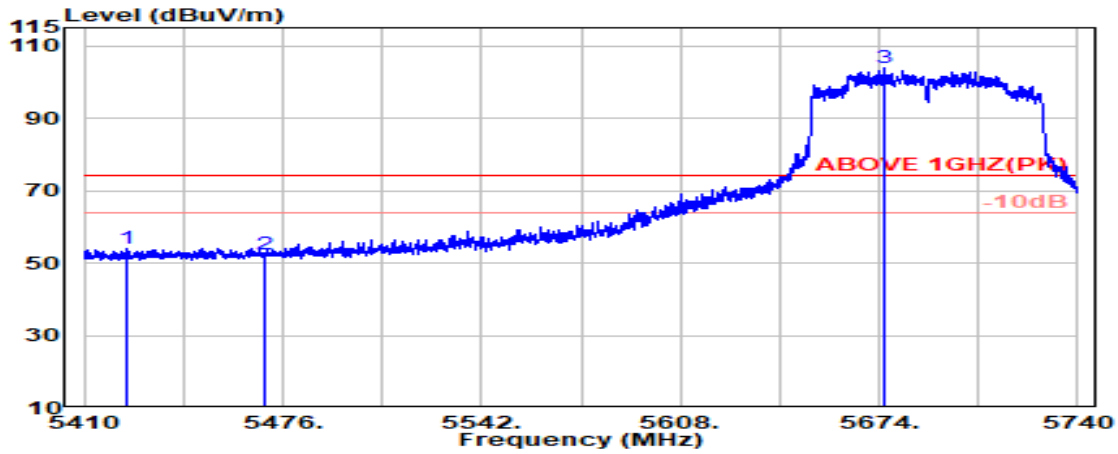

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.500	34.65	8.71	39.25	50.06	54.16	74.00	19.84	Peak
5470.000	34.78	8.74	39.25	47.97	52.24	74.00	21.76	Peak
@ 5676.000	34.50	8.85	39.28	99.70	103.77	---	---	Peak

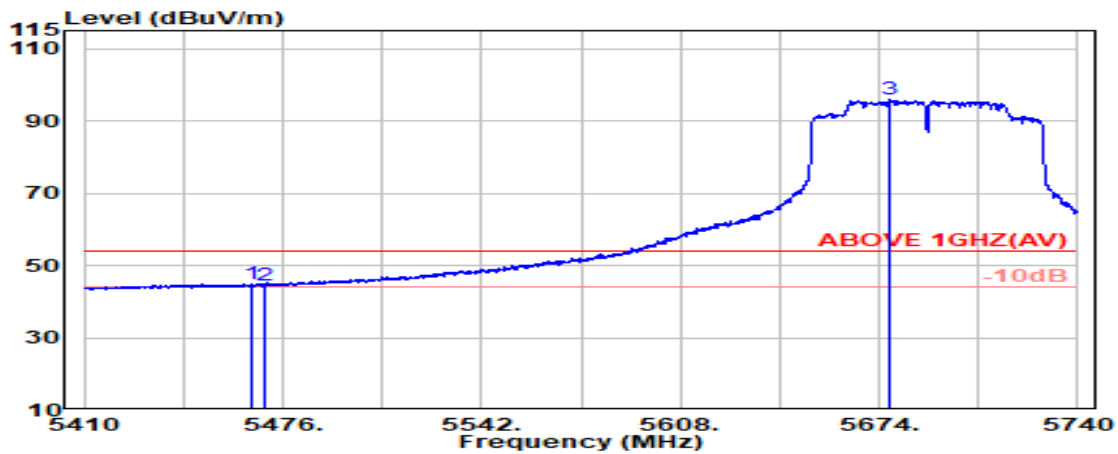


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.76	8.73	39.25	40.70	44.94	54.00	9.06	Average
5470.000	34.78	8.74	39.25	40.20	44.46	54.00	9.54	Average
@ 5677.700	34.49	8.85	39.28	91.96	96.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


## Antenna at Horizontal Polarization

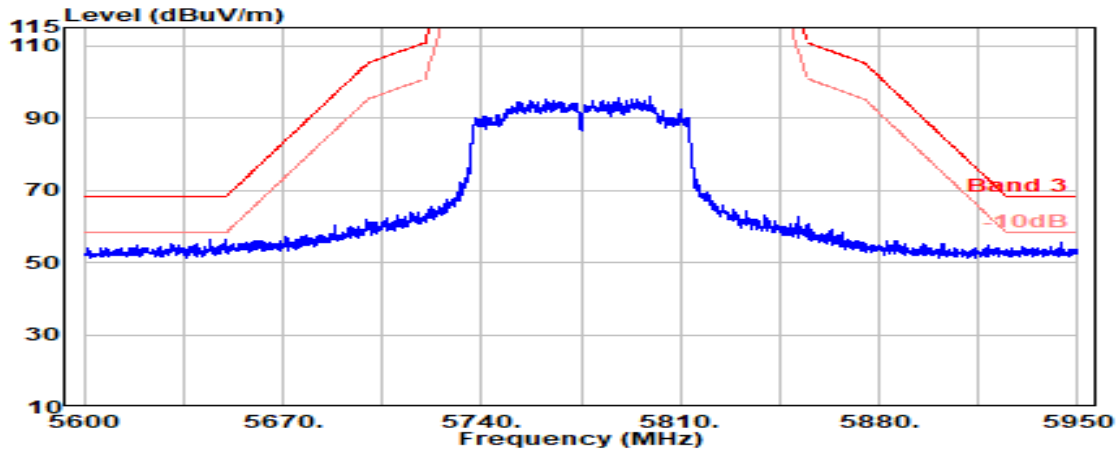

## Antenna at Vertical Polarization

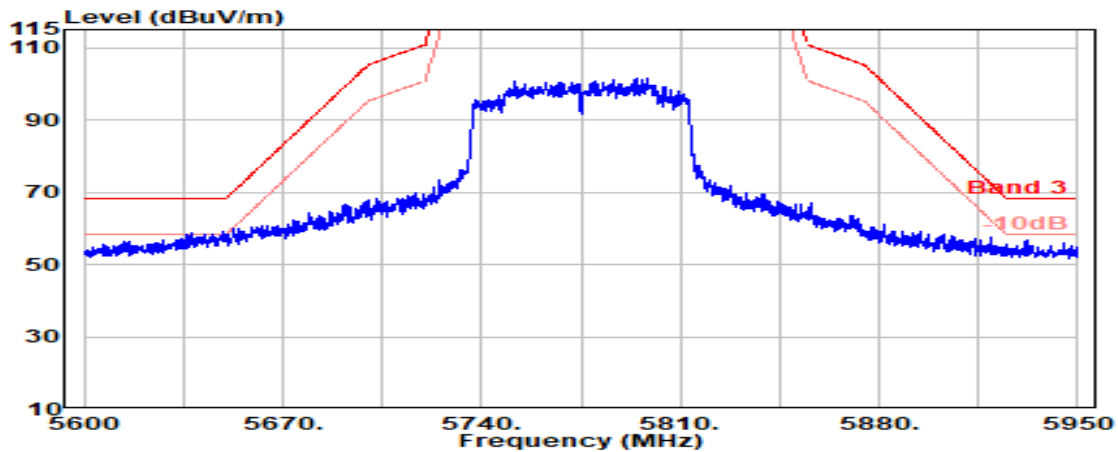


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

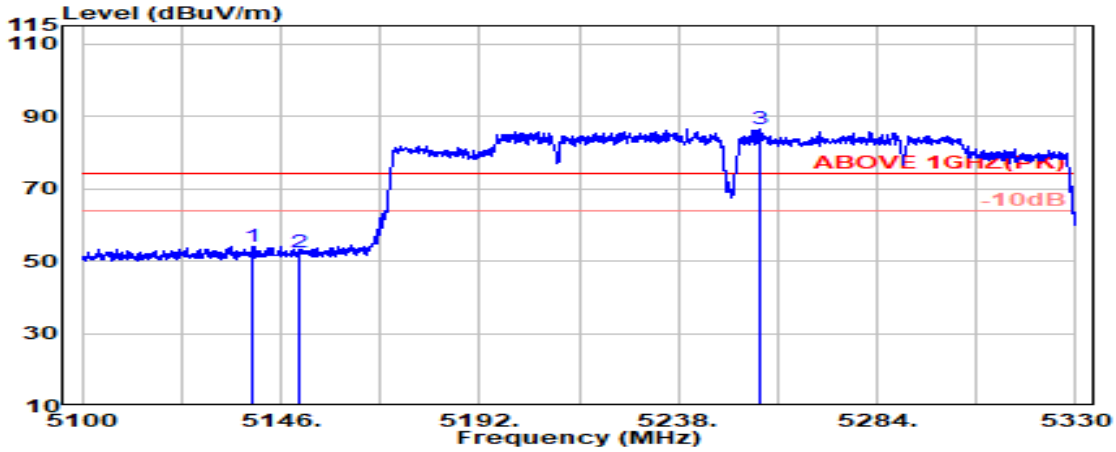

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.600	34.16	8.54	39.27	50.70	54.12	74.00	19.88	Peak
5150.000	34.20	8.54	39.27	49.04	52.52	74.00	21.48	Peak
@ 5256.600	34.43	8.61	39.26	82.86	86.63	---	---	Peak

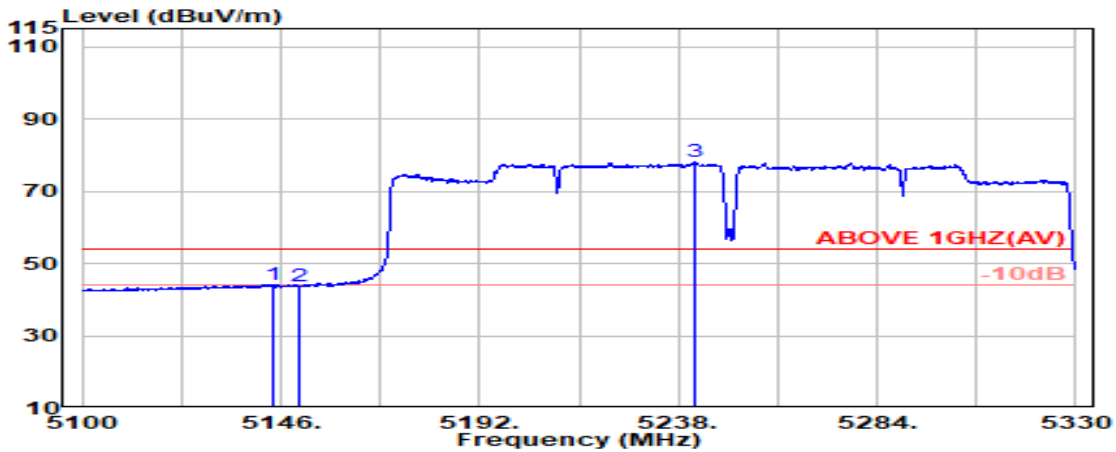


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	34.18	8.54	39.27	40.63	44.08	54.00	9.92	Average
5150.000	34.20	8.54	39.27	40.35	43.82	54.00	10.18	Average
@ 5242.100	34.38	8.60	39.27	74.34	78.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

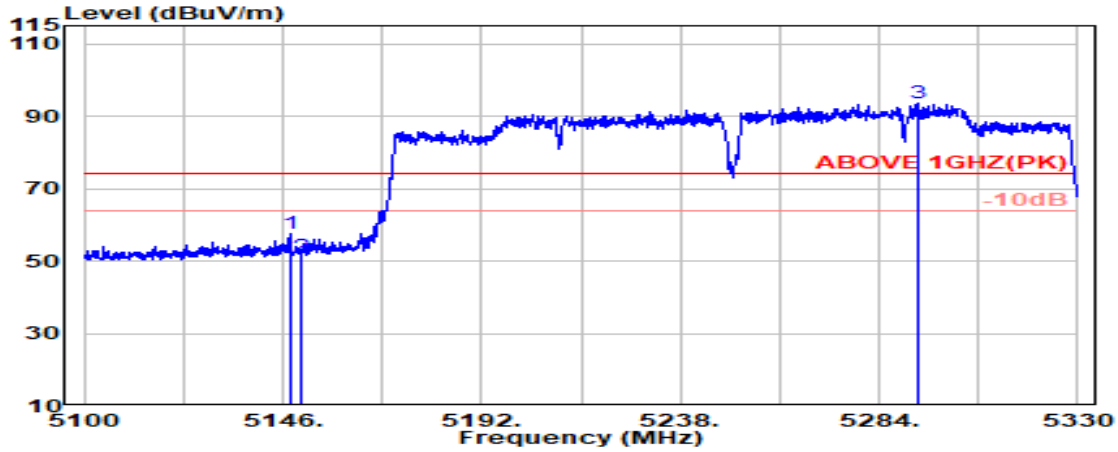

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.700	34.19	8.54	39.27	54.03	57.49	74.00	16.51	Peak
5150.000	34.20	8.54	39.27	47.86	51.33	74.00	22.67	Peak
@ 5292.900	34.57	8.63	39.26	89.62	93.57	---	---	Peak

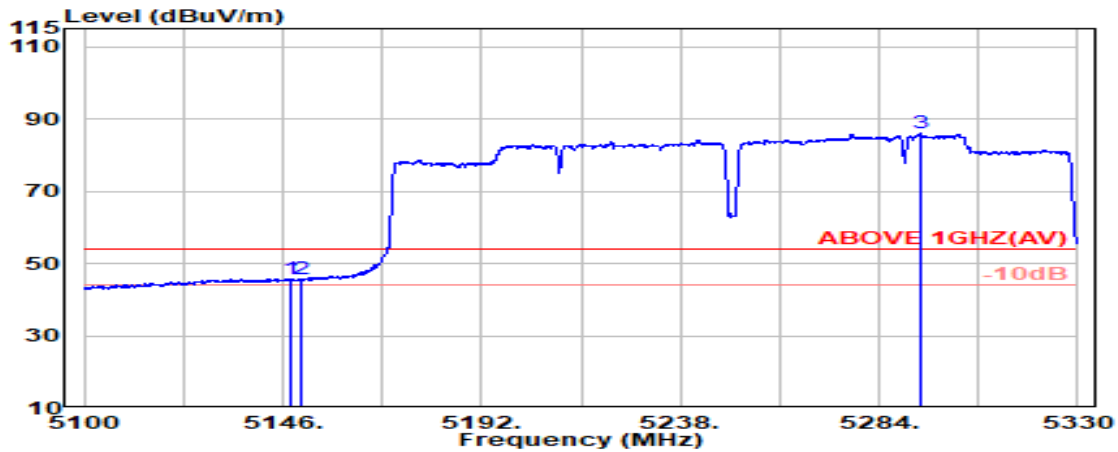


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.19	8.54	39.27	42.39	45.86	54.00	8.14	Average
5150.000	34.20	8.54	39.27	42.21	45.69	54.00	8.31	Average
@ 5293.500	34.57	8.63	39.26	82.22	86.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

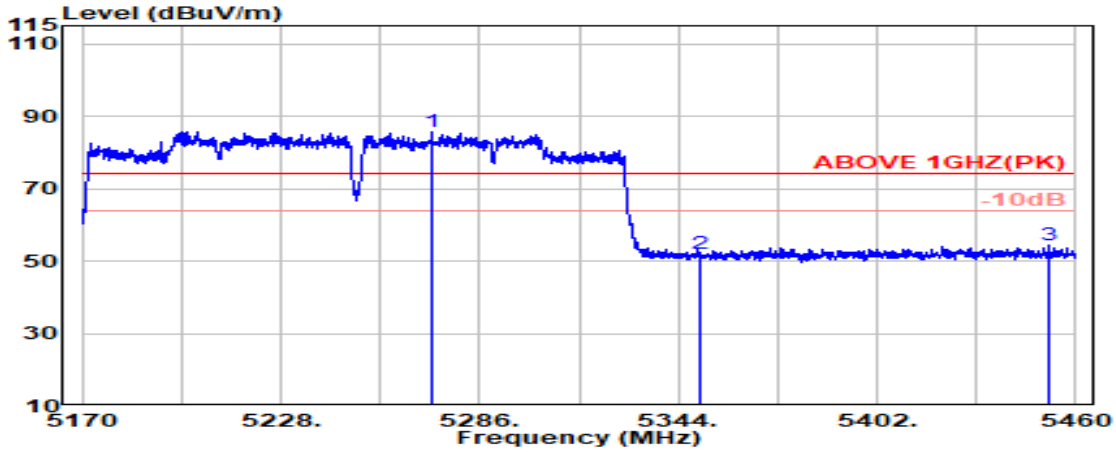

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.900	34.49	8.62	39.26	81.90	85.74	---	---	Peak
5350.000	34.50	8.67	39.26	48.20	52.11	74.00	21.89	Peak
5452.200	34.71	8.73	39.25	50.25	54.43	74.00	19.57	Peak

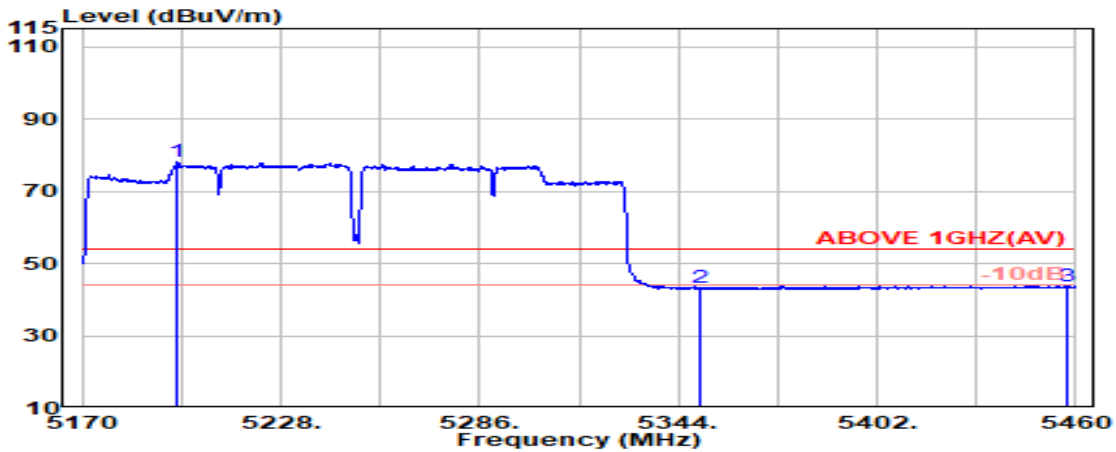


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.900	34.30	8.57	39.27	74.60	78.20	---	---	Average
5350.000	34.50	8.67	39.26	39.19	43.09	54.00	10.91	Average
5457.800	34.73	8.73	39.25	39.49	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

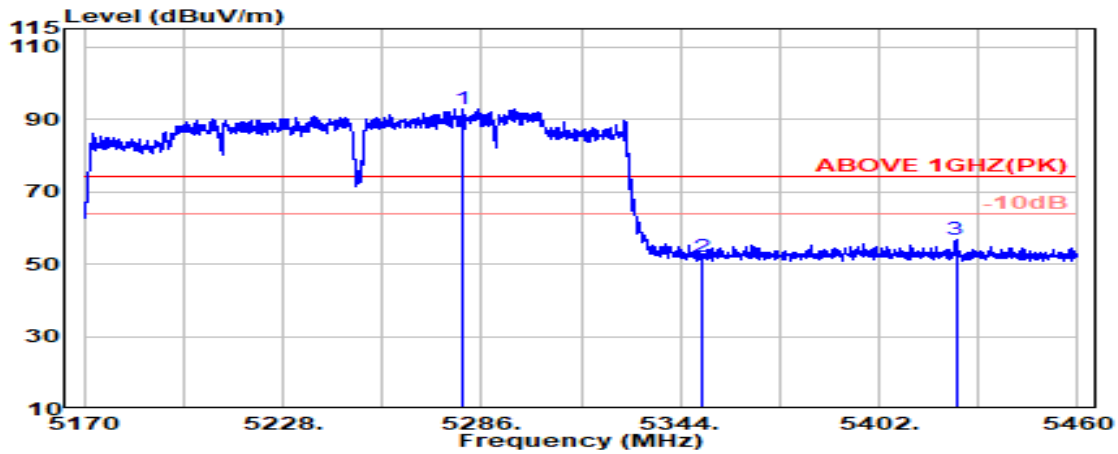

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5280.400	34.52	8.62	39.26	89.10	92.98	---	---	Peak
5350.000	34.50	8.67	39.26	48.07	51.98	74.00	22.02	Peak
5424.400	34.65	8.71	39.25	52.75	56.86	74.00	17.14	Peak

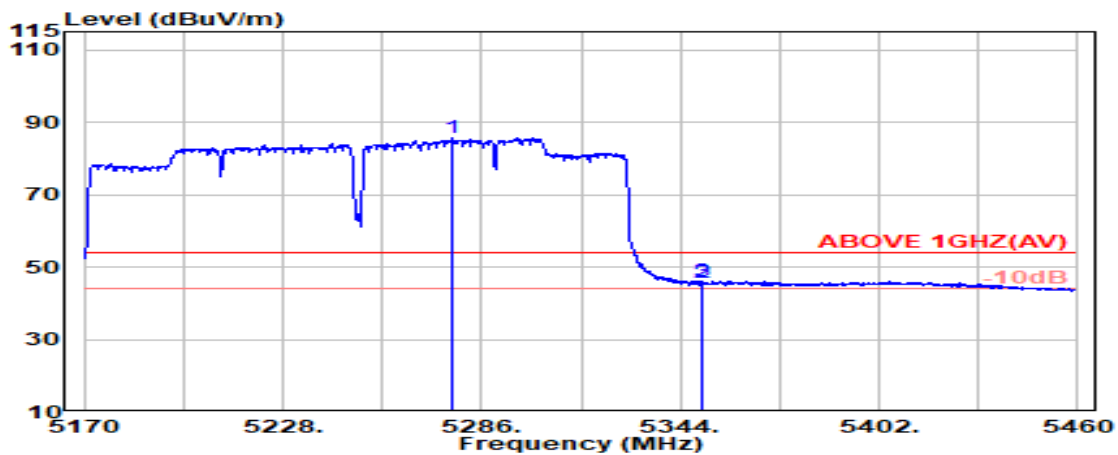


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.700	34.51	8.62	39.26	81.86	85.73	---	---	Average
5350.000	34.50	8.67	39.26	41.65	45.56	54.00	8.44	Average
5350.700	34.50	8.67	39.26	42.08	45.99	54.00	8.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

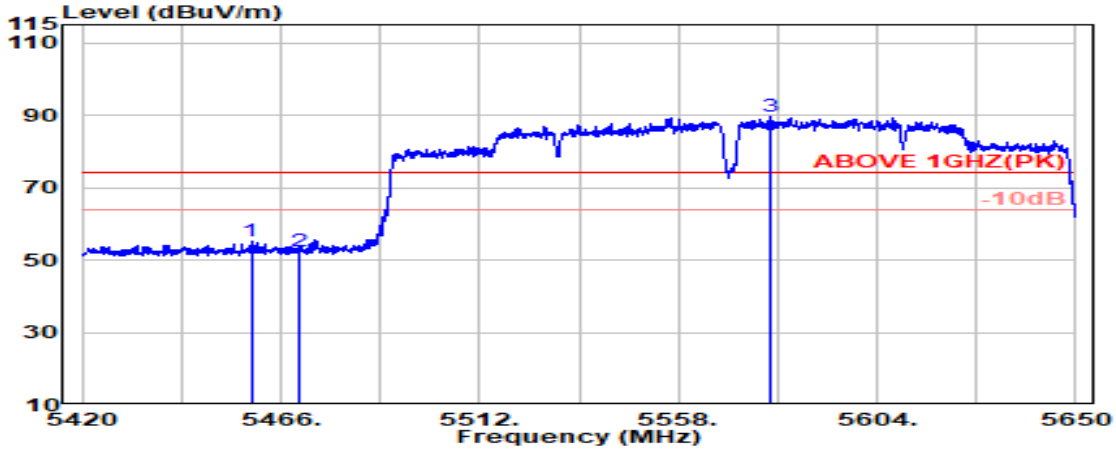

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.74	8.73	39.25	50.94	55.16	74.00	18.84	Peak
5470.000	34.78	8.74	39.25	48.12	52.38	74.00	21.62	Peak
@ 5579.500	34.74	8.80	39.26	85.26	89.54	---	---	Peak

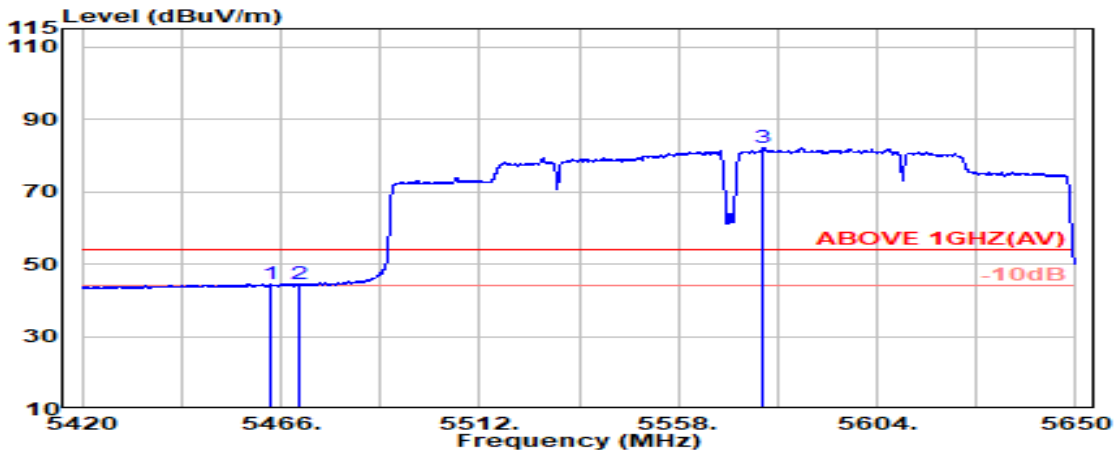


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.75	8.73	39.25	40.20	44.43	54.00	9.57	Average
5470.000	34.78	8.74	39.25	40.06	44.32	54.00	9.68	Average
@ 5577.700	34.74	8.80	39.26	77.86	82.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

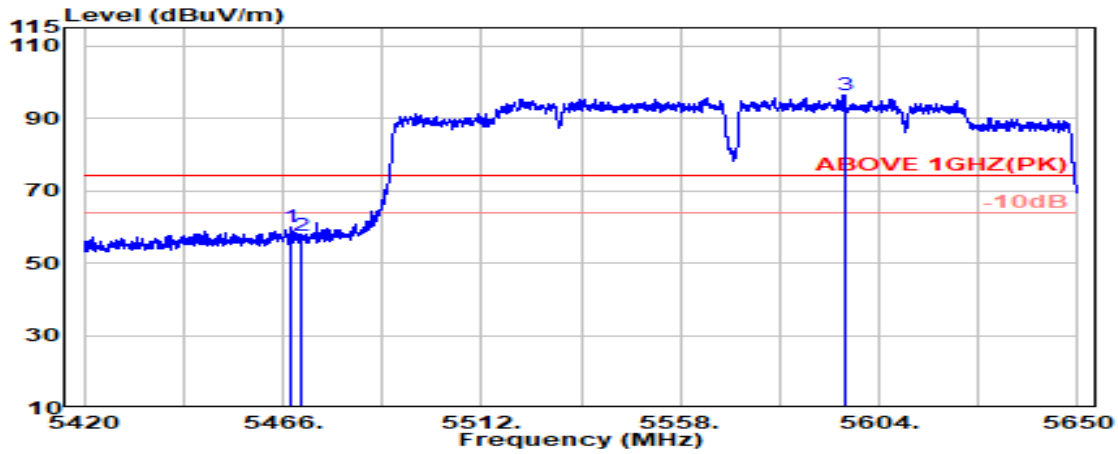

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.77	8.73	39.25	55.54	59.80	74.00	14.20	Peak
5470.000	34.78	8.74	39.25	53.37	57.64	74.00	16.36	Peak
@ 5595.900	34.71	8.81	39.27	92.24	96.49	---	---	Peak

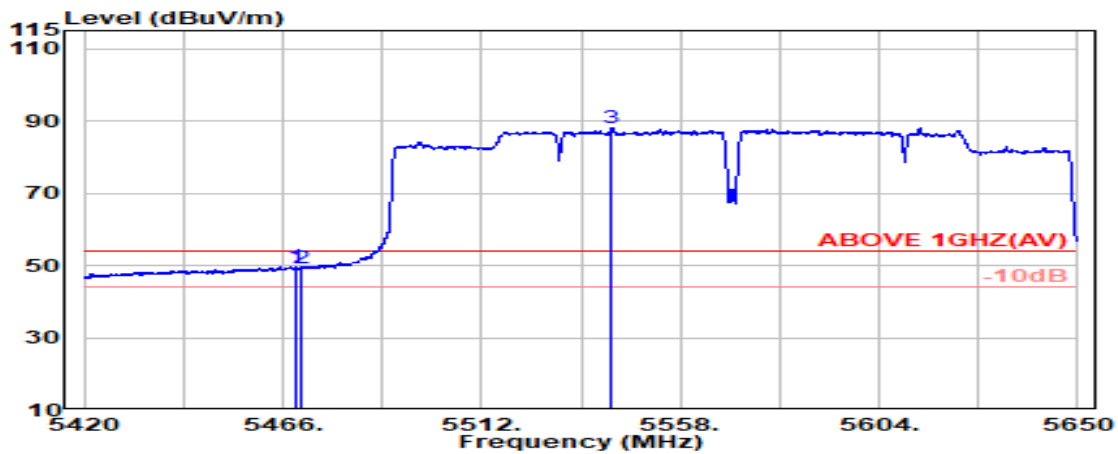


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.78	8.74	39.25	45.32	49.58	54.00	4.42	Average
5470.000	34.78	8.74	39.25	45.00	49.26	54.00	4.74	Average
@ 5542.200	34.82	8.78	39.26	83.61	87.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

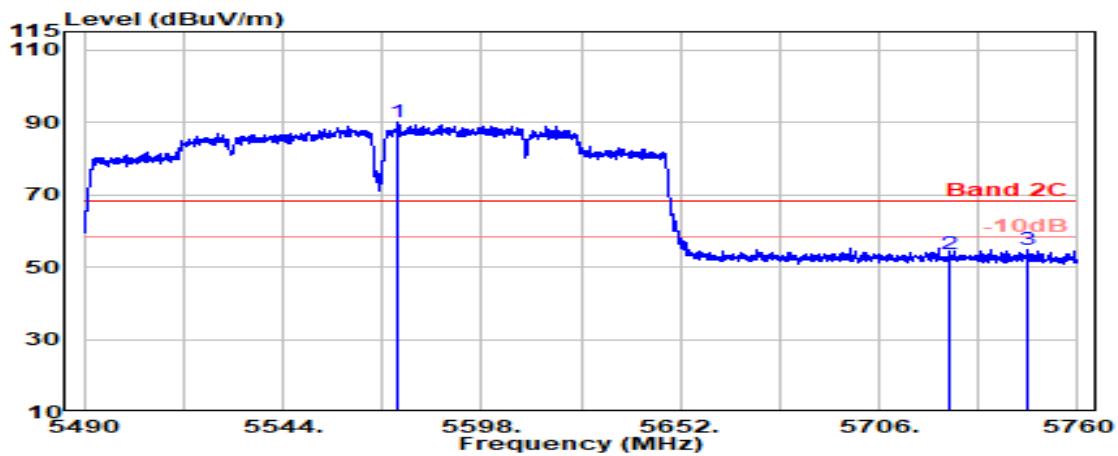

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5575.300	34.75	8.80	39.26	85.62	89.91	---	---	Peak
5725.000	34.45	8.88	39.29	49.74	53.78	68.20	14.42	Peak
5746.400	34.49	8.89	39.30	50.63	54.72	68.20	13.48	Peak

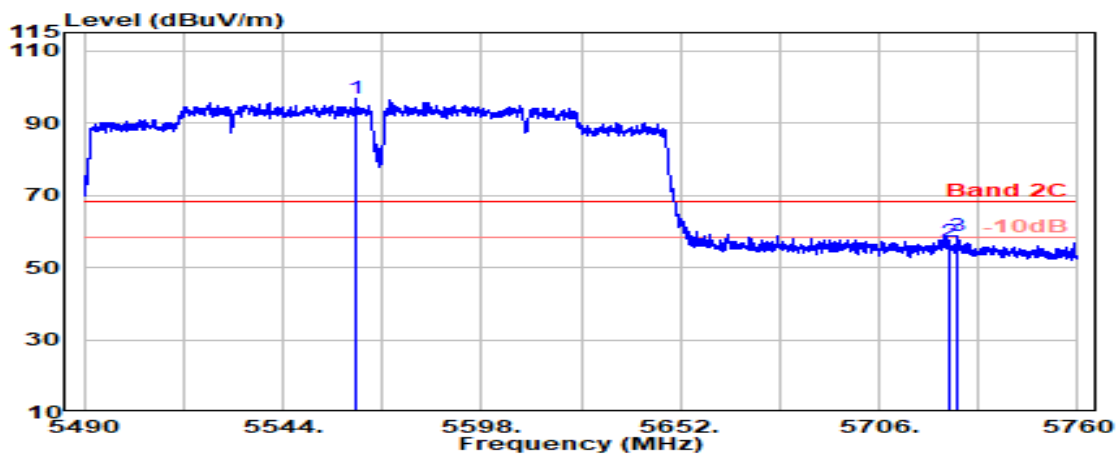


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5563.800	34.77	8.79	39.26	92.46	96.76	---	---	Peak
5725.000	34.45	8.88	39.29	52.97	57.01	68.20	11.19	Peak
5727.100	34.45	8.88	39.29	54.75	58.79	68.20	9.41	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

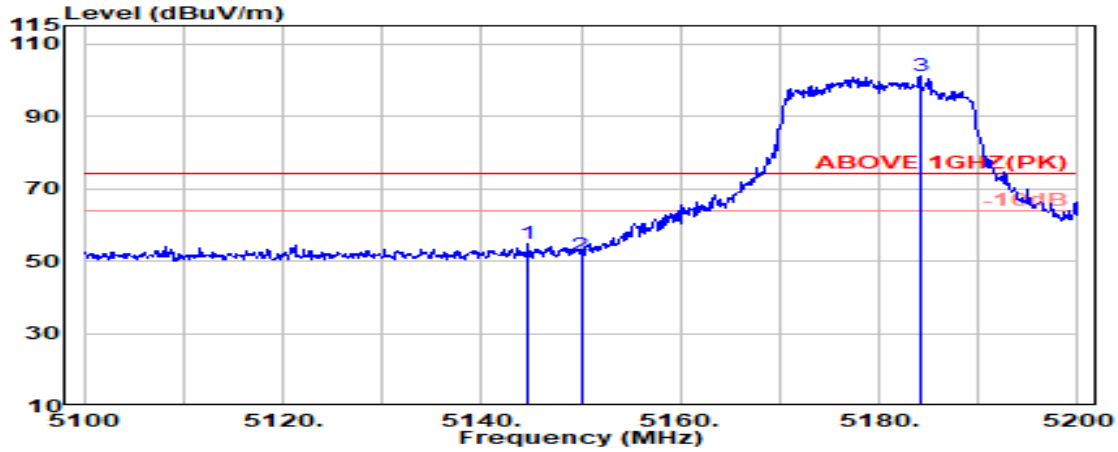

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.600	34.18	8.54	39.27	51.28	54.73	74.00	19.27	Peak
5150.000	34.20	8.54	39.27	48.22	51.69	74.00	22.31	Peak
@ 5184.100	34.27	8.57	39.27	97.38	100.95	---	---	Peak

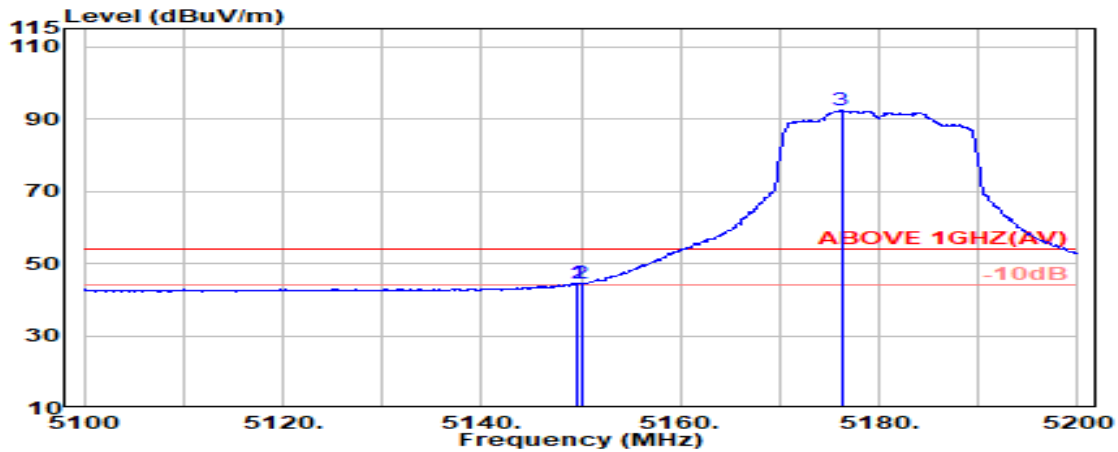


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.54	39.27	40.91	44.38	54.00	9.62	Average
5150.000	34.20	8.54	39.27	40.99	44.47	54.00	9.53	Average
@ 5176.200	34.25	8.56	39.27	88.77	92.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

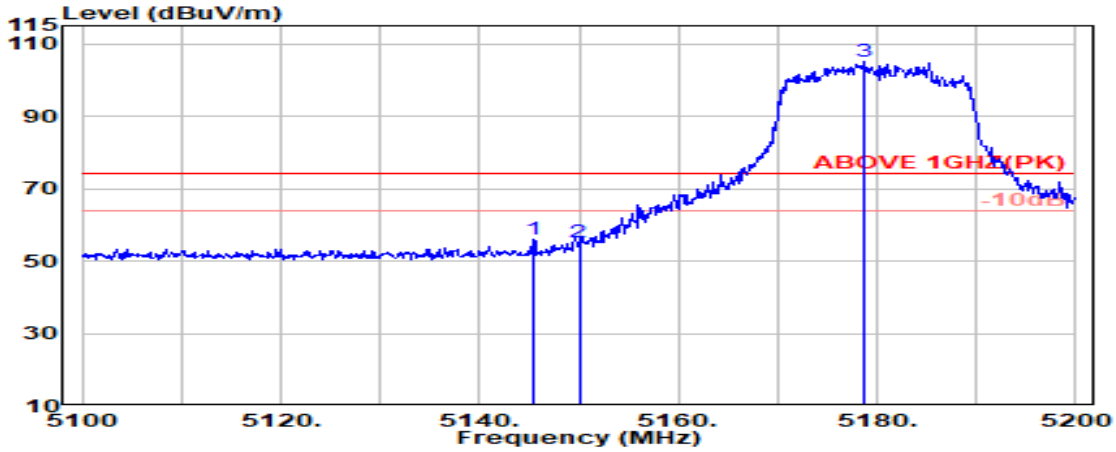

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.500	34.18	8.54	39.27	52.66	56.11	74.00	17.89	Peak
5150.000	34.20	8.54	39.27	51.82	55.30	74.00	18.70	Peak
@ 5178.800	34.26	8.56	39.27	101.57	105.12	---	---	Peak

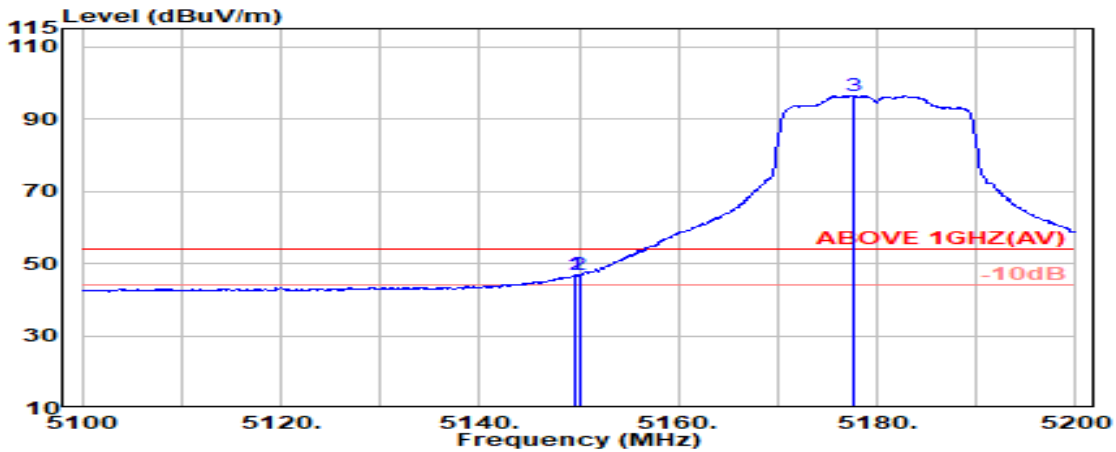


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.27	43.19	46.66	54.00	7.34	Average
5150.000	34.20	8.54	39.27	43.43	46.91	54.00	7.09	Average
@ 5177.600	34.26	8.56	39.27	92.88	96.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

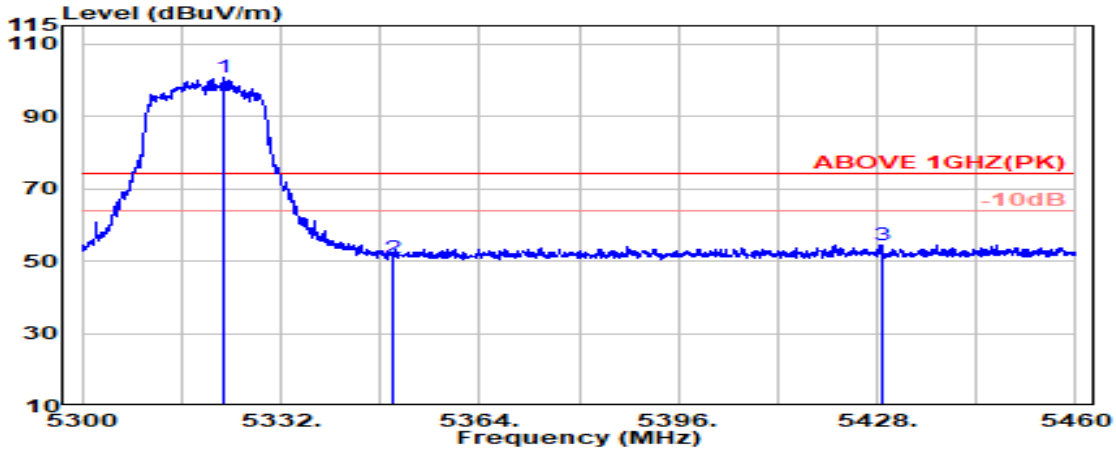

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	34.55	8.65	39.26	96.64	100.58	---	---	Peak
5350.000	34.50	8.67	39.26	46.99	50.90	74.00	23.10	Peak
5428.700	34.66	8.71	39.25	50.42	54.54	74.00	19.46	Peak

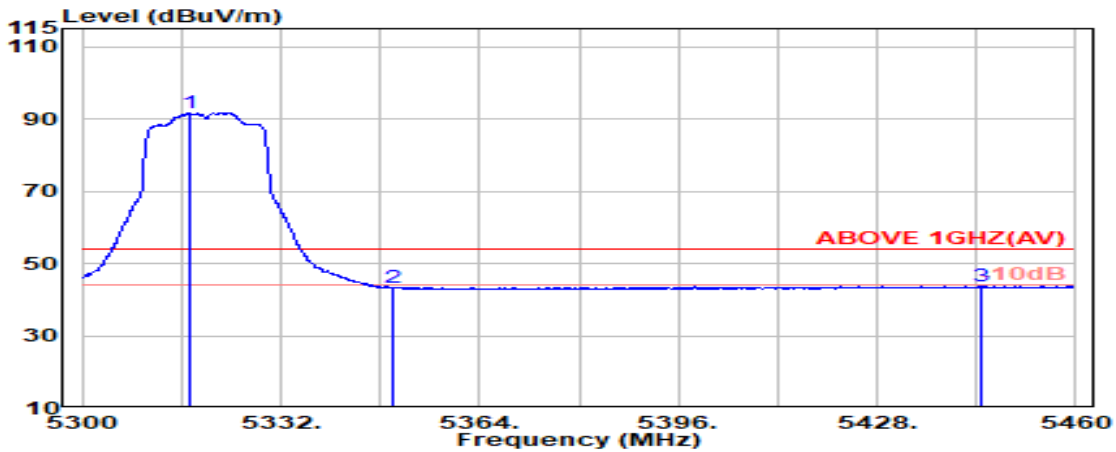


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.400	34.57	8.65	39.26	87.82	91.77	---	---	Average
5350.000	34.50	8.67	39.26	39.22	43.13	54.00	10.87	Average
5444.900	34.69	8.72	39.25	39.51	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

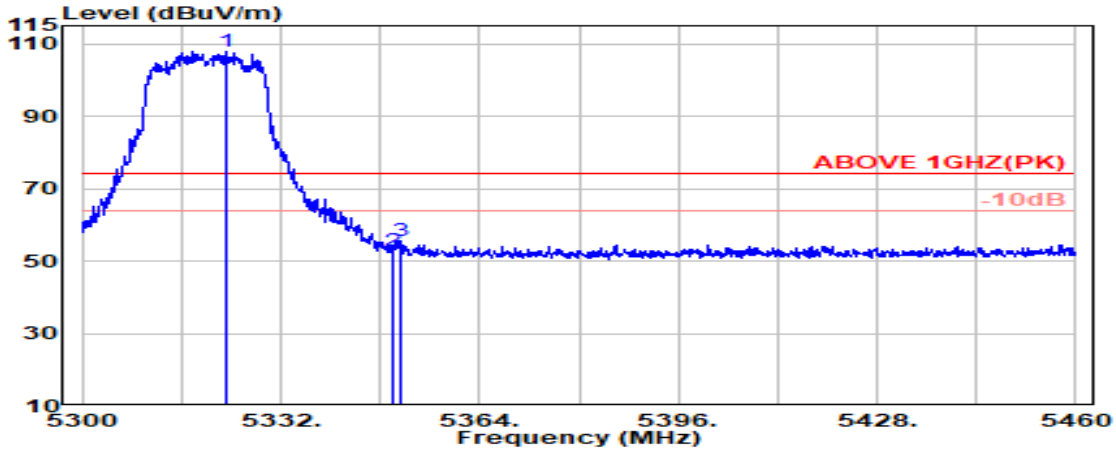

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	34.55	8.65	39.26	103.95	107.89	---	---	Peak
5350.000	34.50	8.67	39.26	48.72	52.63	74.00	21.37	Peak
5351.300	34.50	8.67	39.26	51.79	55.70	74.00	18.30	Peak

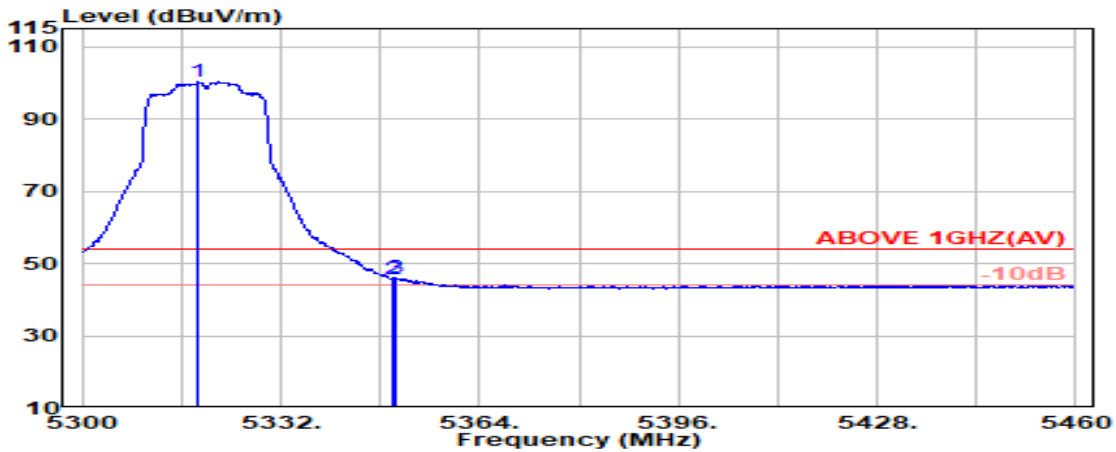


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	34.56	8.65	39.26	96.31	100.26	---	---	Average
5350.000	34.50	8.67	39.26	41.84	45.75	54.00	8.25	Average
5350.600	34.50	8.67	39.26	42.14	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

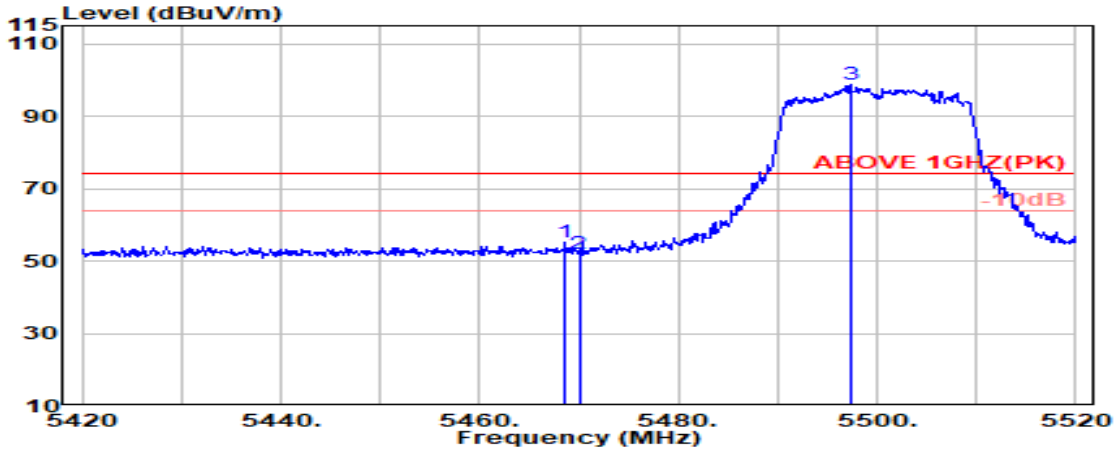

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.77	8.73	39.25	50.75	55.01	74.00	18.99	Peak
5470.000	34.78	8.74	39.25	47.89	52.16	74.00	21.84	Peak
@ 5497.300	34.89	8.75	39.25	94.17	98.56	---	---	Peak

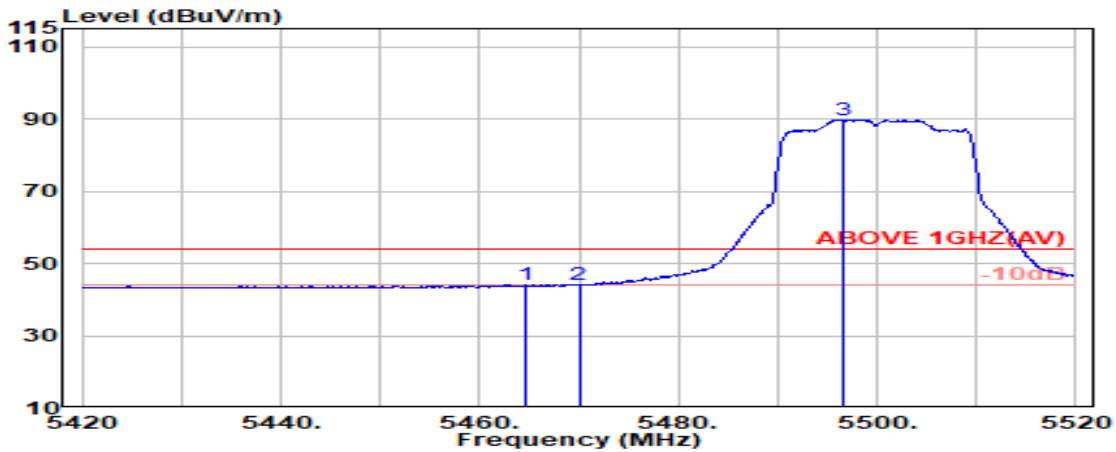


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.76	8.73	39.25	39.84	44.08	54.00	9.92	Average
5470.000	34.78	8.74	39.25	39.78	44.04	54.00	9.96	Average
@ 5496.500	34.89	8.75	39.25	85.32	89.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

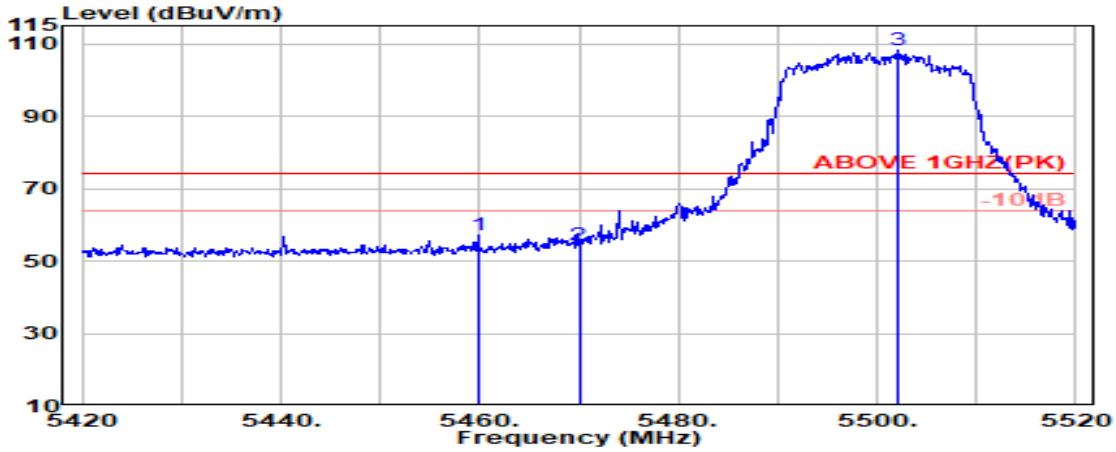

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.74	8.73	39.25	53.11	57.33	74.00	16.67	Peak
5470.000	34.78	8.74	39.25	50.27	54.53	74.00	19.47	Peak
@ 5502.200	34.90	8.75	39.25	103.76	108.16	---	---	Peak

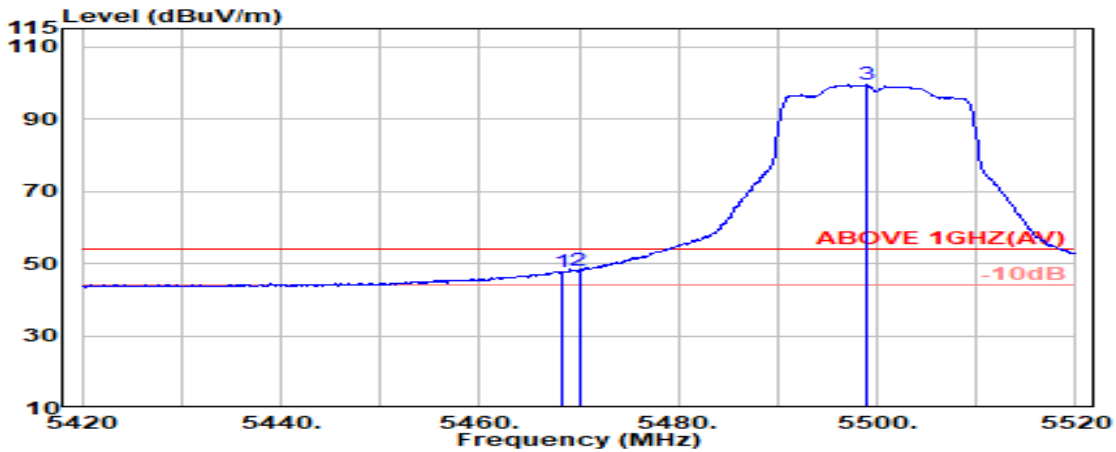


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.77	8.73	39.25	43.58	47.83	54.00	6.17	Average
5470.000	34.78	8.74	39.25	43.74	48.00	54.00	6.00	Average
@ 5498.900	34.90	8.75	39.25	94.98	99.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

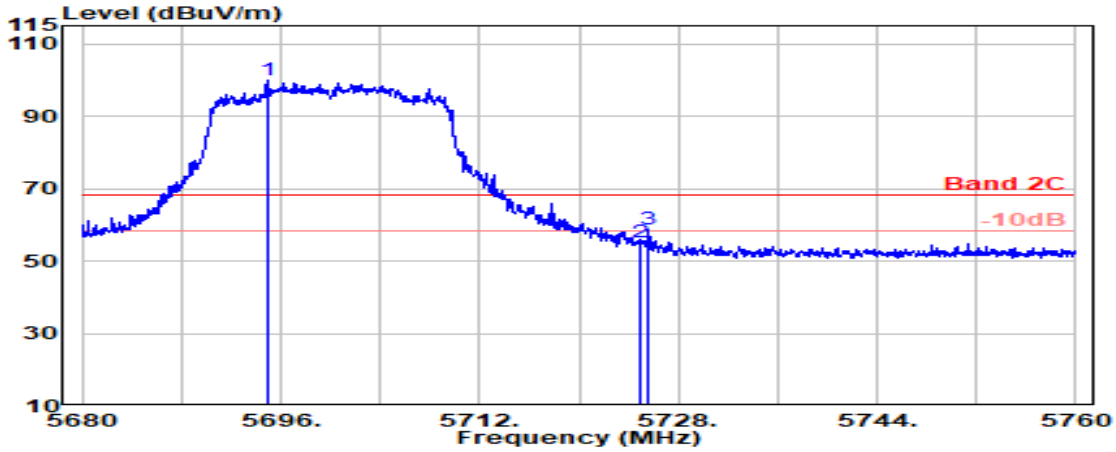

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.900	34.42	8.86	39.29	95.90	99.90	---	---	Peak
5725.000	34.45	8.88	39.29	51.19	55.23	68.20	12.97	Peak
5725.650	34.45	8.88	39.29	54.83	58.87	68.20	9.33	Peak

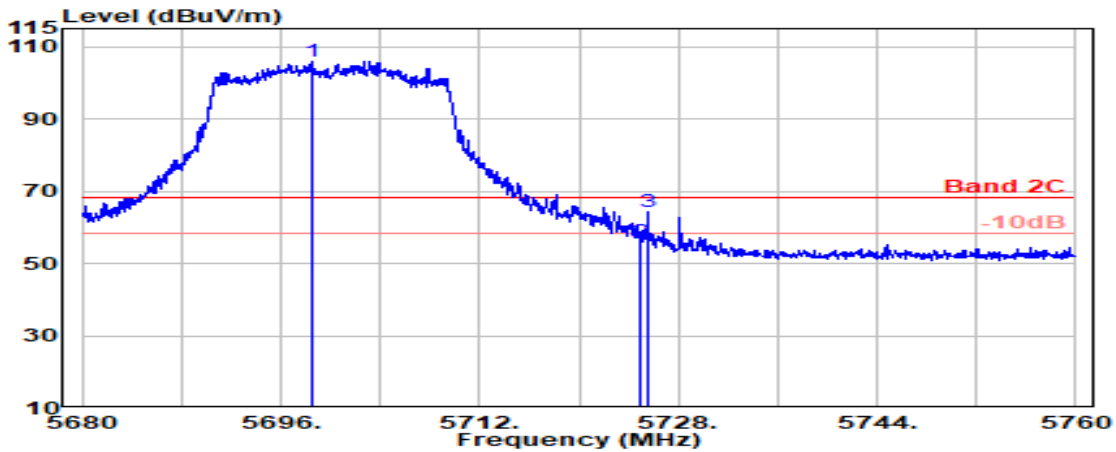


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.500	34.41	8.87	39.29	102.01	106.00	---	---	Peak
5725.000	34.45	8.88	39.29	52.06	56.10	68.20	12.10	Peak
5725.550	34.45	8.88	39.29	60.31	64.35	68.20	3.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

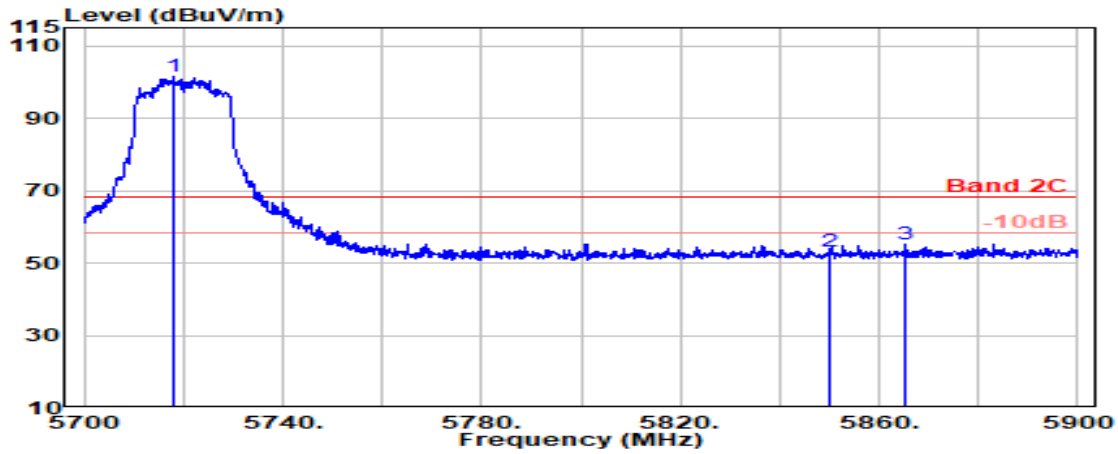

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.000	34.44	8.88	39.29	97.49	101.51	---	---	Peak
5850.000	34.70	8.95	39.31	48.76	53.10	68.20	15.10	Peak
5865.300	34.73	8.96	39.32	50.73	55.11	68.20	13.09	Peak

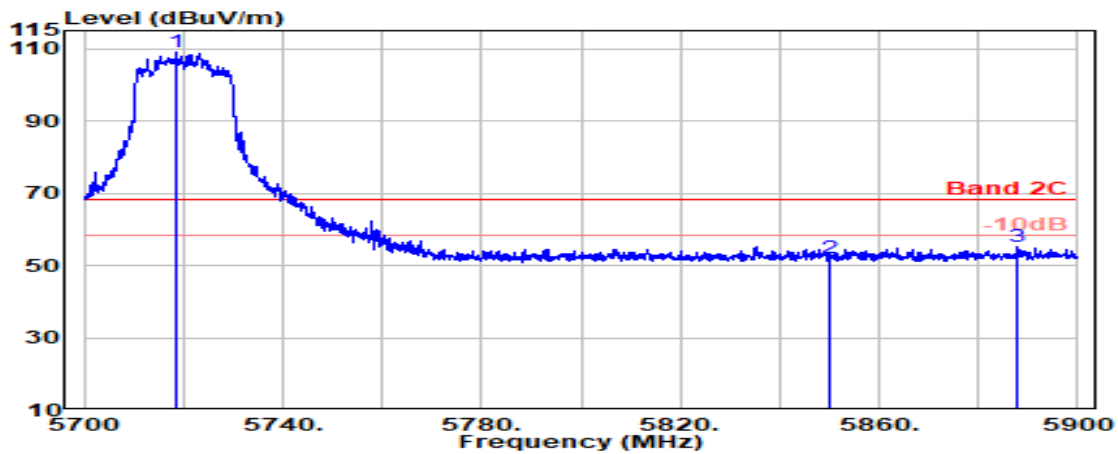


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.500	34.44	8.88	39.29	104.85	108.88	---	---	Peak
5850.000	34.70	8.95	39.31	47.49	51.82	68.20	16.38	Peak
5888.000	34.78	8.97	39.32	50.59	55.02	68.20	13.18	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

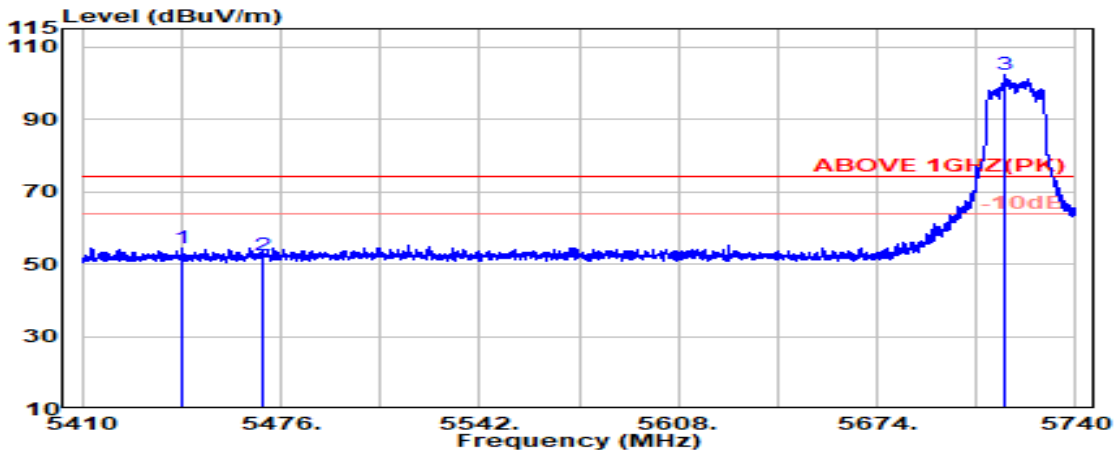

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.200	34.69	8.72	39.25	50.30	54.45	74.00	19.55	Peak
5470.000	34.78	8.74	39.25	48.10	52.37	74.00	21.63	Peak
@ 5716.400	34.43	8.88	39.29	98.32	102.34	---	---	Peak

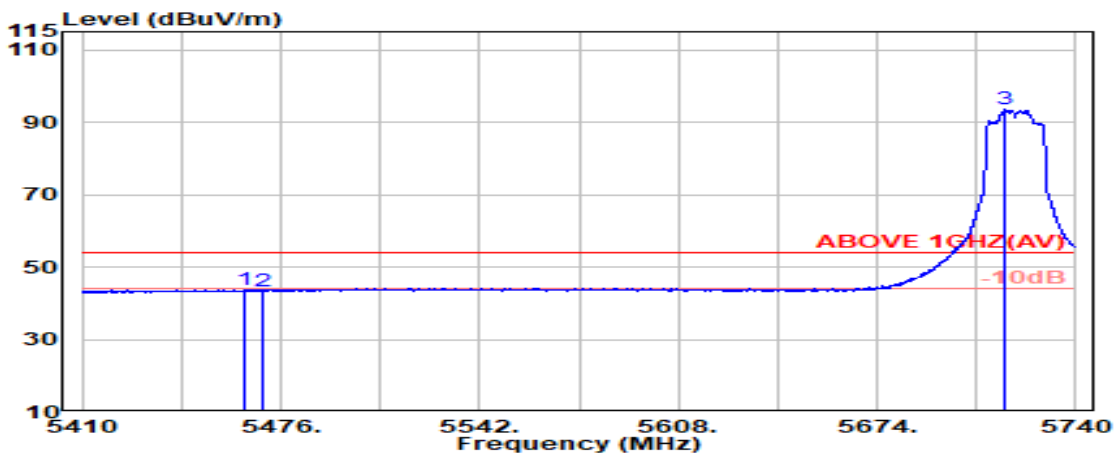


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.76	8.73	39.25	39.45	43.68	54.00	10.32	Average
5470.000	34.78	8.74	39.25	39.15	43.41	54.00	10.59	Average
@ 5716.600	34.43	8.88	39.29	89.40	93.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

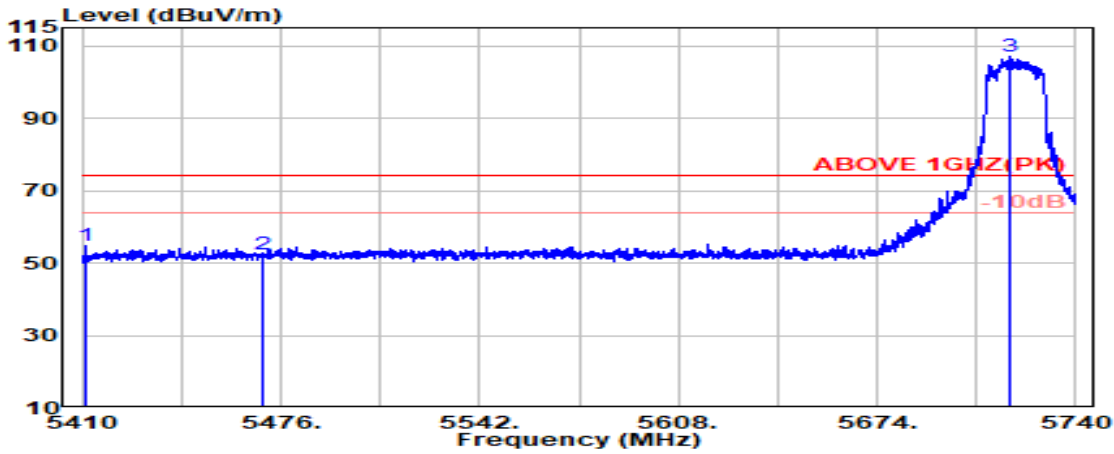

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.400	34.62	8.70	39.26	50.70	54.77	74.00	19.23	Peak
5470.000	34.78	8.74	39.25	48.15	52.41	74.00	21.59	Peak
@ 5717.900	34.44	8.88	39.29	103.04	107.06	---	---	Peak

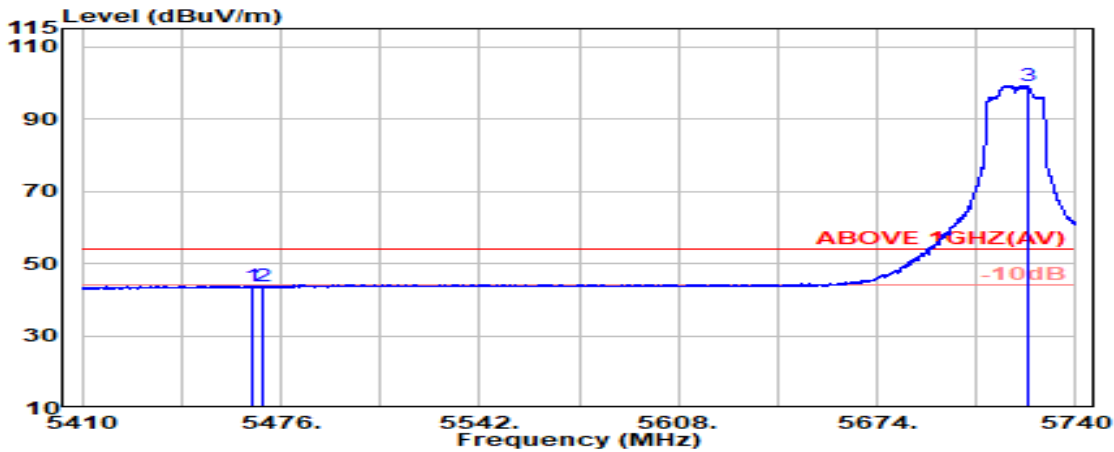


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.77	8.73	39.25	39.51	43.76	54.00	10.24	Average
5470.000	34.78	8.74	39.25	39.28	43.54	54.00	10.46	Average
@ 5724.000	34.45	8.88	39.29	95.19	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

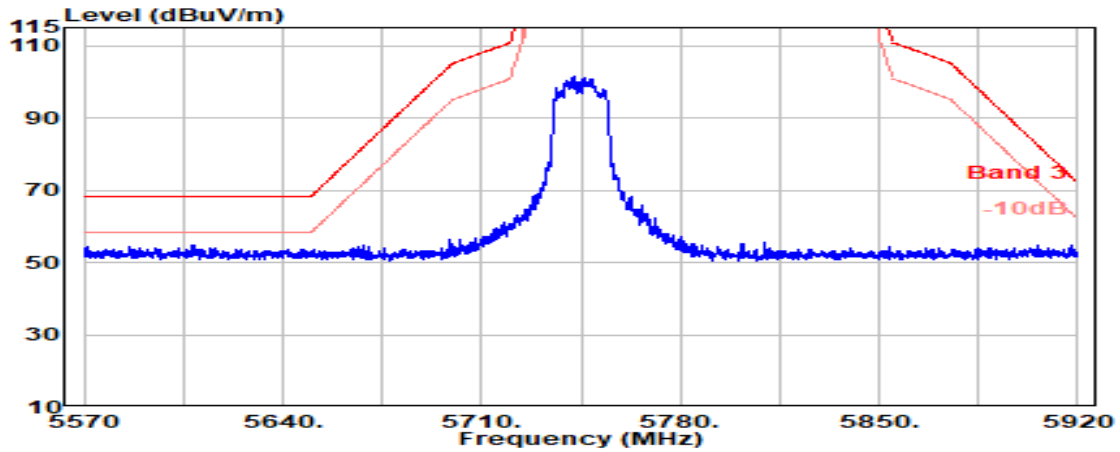


## Antenna at Vertical Polarization

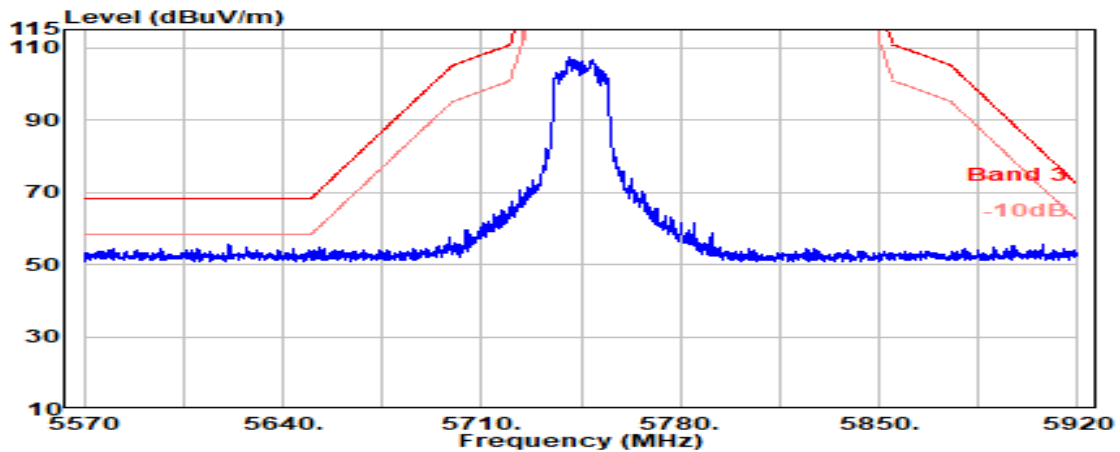

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz

## Antenna at Horizontal Polarization

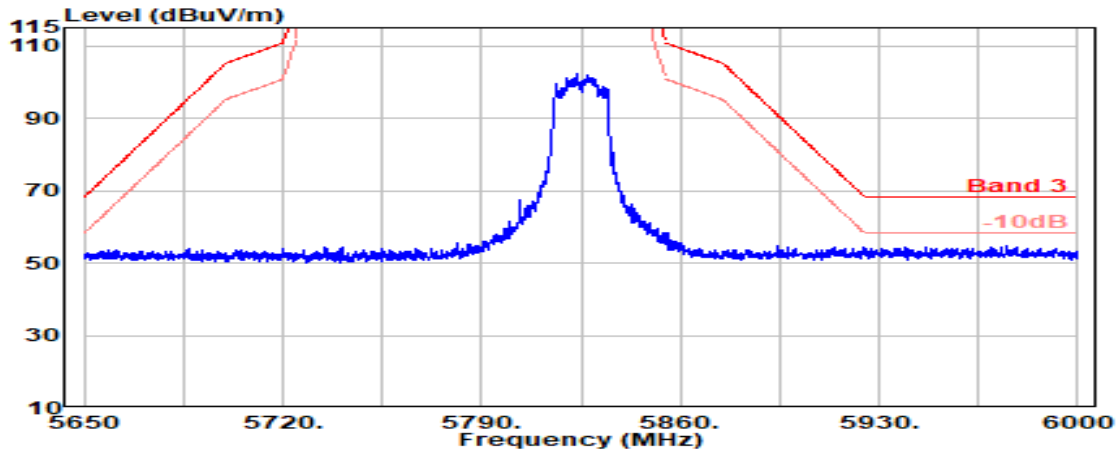

## Antenna at Vertical Polarization

