

## **FCC 15.247 & RSS-247 2.4GHz Test Report**

**for**

**LG Electronics Inc.**

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,  
17709 Republic of Korea**

**Product Name : Notebook Computer**  
**Model Name : (1)17Z90TP (2)17ZB90TP**  
**(3)17ZD90TP (4)17ZG90TP**  
**Brand : LG**  
**FCC ID : BEJNT-17Z90TP**  
**IC : 2703H-17Z90TP**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

## TABLE OF CONTENTS

Description	Page
TEST REPORT .....	4
<b>1. REVISION RECORD OF TEST REPORT .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
3.1. Description of Application .....	7
3.2. Description of EUT .....	8
3.3. Reference Test Guidance.....	9
3.4. Antenna Information .....	9
3.5. EUT Specifications Assessed in Current Report .....	10
3.6. Description of Key Components .....	11
3.7. Test Configuration.....	13
3.8. Output Power Setting .....	14
3.9. Tested Supporting System List.....	14
3.10. Setup Configuration.....	15
3.11. Operating Condition of EUT .....	15
3.12. Description of Test Facility .....	15
3.13. Measurement Uncertainty .....	16
<b>4. MEASUREMENT EQUIPMENTLIST.....</b>	<b>18</b>
4.1. Conducted Emission Measurement .....	18
4.2. Radiated Emission Measurement .....	18
4.3. RF Conducted Measurement .....	19
<b>5. CONDUCTED EMISSION.....</b>	<b>20</b>
5.1. Block Diagram of Test Setup .....	20
5.2. Conducted Emission Limit .....	20
5.3. Test Procedure .....	20
5.4. Test Results .....	20
<b>6. RADIATED EMISSION .....</b>	<b>21</b>
6.1. Block Diagram of Test Setup .....	21
6.2. Radiated Emission Limits.....	22
6.3. Test Procedure .....	23
6.4. Measurement Result Explanation .....	24
6.5. Test Results .....	24
<b>7. 20dB/OCCUPIED BANDWIDTH.....</b>	<b>25</b>
7.1. Block Diagram of Test Setup .....	25
7.2. Specification Limits.....	25
7.3. Test Procedure .....	25
7.4. Test Results .....	25
<b>8. CARRIER FREQUENCY SEPARATION .....</b>	<b>26</b>
8.1. Block Diagram of Test Setup .....	26
8.2. Specification Limits.....	26
8.3. Test Procedure .....	26
8.4. Test Results .....	26
<b>9. TIME OF OCCUPANCY.....</b>	<b>27</b>
9.1. Block Diagram of Test Setup .....	27
9.2. Specification Limits.....	27



**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

9.3. Test Procedure .....	27
9.4. Test Results .....	27
<b>10. NUMBER OF HOPPING CHANNELS .....</b>	<b>28</b>
10.1. Block Diagram of Test Setup .....	28
10.2. Specification Limits.....	28
10.3. Test Procedure .....	28
10.4. Test Results .....	28
<b>11. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>29</b>
11.1. Block Diagram of Test Setup .....	29
11.2. Specification Limits.....	29
11.3. Test Procedure .....	29
11.4. Test Results .....	29
<b>12. EMISSION LIMITATIONS .....</b>	<b>30</b>
12.1. Block Diagram of Test Setup .....	30
12.2. Specification Limits.....	30
12.3. Test Procedure .....	30
12.4. Test Results .....	30
<b>13. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>31</b>

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

## TEST REPORT

Applicant : LG Electronics Inc.  
Manufacturer : LG Electronics Inc.  
Factory : LG Electronics Nanjing New Technology Co., Ltd.  
EUT Description  
(1) Product : Notebook Computer  
(2) Model : (1)17Z90TP (2)17ZB90TP (3)17ZD90TP (4)17ZG90TP  
(3) Brand : LG  
(4) Power Supply : DC 20V, 3.25A

### Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C  
RSS-Gen (Issue 5), Amendment 2, February 2021  
RSS-247 (Issue 3), August 2023

**Audix Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2024. 10. 24

Reviewed by:



(Sunnie Huang/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)



**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

## 1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2024. 10. 24	Original Report	EM-F240470

## 2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	<b>PASS</b>
15.247(d)/15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	<b>PASS</b>
15.247(a)(1)	RSS-247 §5.1(a)	20dB/Occupied Bandwidth	<b>PASS</b>
15.247(a)(1)	RSS-247 §5.1(b)	Carrier Frequency Separation	<b>PASS</b>
15.247(a)(1)(iii)	RSS-247 §5.1(d)	Time of Occupancy	<b>PASS</b>
15.247(a)(1)(iii)	RSS-247 §5.1(d)	Number of Hopping Channels	<b>PASS</b>
15.247(b)(1)	RSS-247 §5.1(b)	Maximum Peak Output Power	<b>PASS</b>
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	<b>PASS</b>
15.203	---	Antenna Requirement	<b>Compliance</b>

Note: The uncertainties value is not used in determining the result.

### 3. GENERAL INFORMATION

#### 3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook Computer
Model	(1)17Z90TP (2)17ZB90TP (3)17ZD90TP (4)17ZG90TP The difference between all models is different in the sales customers and color difference.
Brand	LG

### 3.2. Description of EUT

Test Model	17Z90TP		
Serial Number	N/A		
Power Rating	DC 20V, 3.25A		
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)		
RF Features	WLAN:802.11 a/b/g/n/ac/ax/be Bluetooth: BT and BLE (BT5.4)		
Transmit Type	2.4 GHz Bands		
	802.11b		1T1R
	802.11g		1T1R
	802.11n-HT20/40		2T2R
	802.11ax-HE20/40		2T2R
	802.11be-EHT20/40		2T2R
	BT/BLE		1T1R
	U-NII Bands		
	802.11a		1T1R
	802.11n-HT20/40		2T2R
	802.11ac-VHT20/40/80/160		2T2R
	802.11ax-HE20/40/80/160		2T2R
	802.11be-EHT20/40/80/160		2T2R
	WLAN 6E Bands		
	802.11ax-HE20/40/80/160		2T2R
	802.11be-EHT20/40/80/160/320		2T2R
	The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).		
Sample Status	Trial sample		
Test Sample	Sample No.	Test Item	Firmware
	03	AC Conduction, RSE, RF Conducted	N/A
Date of Receipt	2024. 09. 19		
Date of Test	2024. 10. 05 ~ 09		
Interface Ports of EUT	<ul style="list-style-type: none"> <li>• One HDMI Port</li> <li>• Two USB Type C Ports</li> <li>• One Earphone Port</li> <li>• Two USB 3.0 Ports</li> </ul>		
Accessories Supplied	<ul style="list-style-type: none"> <li>• AC Adapter</li> <li>• USB C Cable</li> <li>• LAN Gender</li> </ul>		

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.



### 3.3. Reference Test Guidance

ANSI C63.10:2013

### 3.4. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
1	WA-P-LBLB-04-112	INPAQ	Mono-Pole	2400~2500	1.5	2.7
				5150~5350	1.6	3.0
				5470~5725	2.5	1.3
				5725~5900	2.5	2.3
				5925~6425	0.6	2.4
				6425~6525	3.1	2.4
				6525~6875	2.8	1.6
				6875~7125	2.7	1.4

According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then  
 Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi  
 Note 1. 2.4G: Directional gain =  
 2400~2500MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{2.7/10})/2] = 2.14$ dBi  
 Note 2. 5G: Directional gain =  
 5150 ~ 5350MHz: =  $10 \log[(10^{1.6/10} + 10^{3.0/10})/2] = 2.36$ dBi  
 5725 ~ 5900MHz: =  $10 \log[(10^{2.5/10} + 10^{2.3/10})/2] = 2.40$ dBi  
 Note 3. UNII Band (WLAN 6G):  
 5925~6425MHz: Directional gain =  $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi  
 6425~6525MHz: Directional gain =  $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi  
 6525~6875MHz: Directional gain =  $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi  
 6875~7125MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{-1.4/10})/2] = 2.10$ dBi

### 3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3

Channel List							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.6. Description of Key Components

#### 3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character	
System	Microsoft	Win10 Home / Pro	---	
		Win11 Home / Pro	---	
Main Board	LG	1XZ90TP MAIN B/D	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.	
SUB Board	LG	17Z90TP SUB B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 JiangSuHuaShen Electronic co.,ltd (HXF) #3 Elec&Eltek Company (MCO) Limited.	
CPU (Socket: BGA2049)	Intel	Ultra 7 255H	2.0 GHz	
	Intel	Ultra 5 225H	1.7 GHz	
17" LCD Panel	LG Display	LP170WQ2	Resolution: 2560 x 1600, 144Hz	
Storage (SSD)	SAMSUNG	---	256GB / 512GB / 1TB	
	SK hynix	---	256GB / 512GB / 1TB	
Memory (RAM)	SAMSUNG	---	16GB / 32GB LPDDR5x(On Board)	
	SK hynix	---	16GB / 32GB LPDDR5x(On Board)	
Battery Pack	LG	LB3122MM	77Wh, DC 15.52V, 4963mAh	
		LBY122NM	90Wh, DC 15.52V, 5800mAh	
WLAN Combo Card	Intel	BE201D2W	WLAN and BT, 2x2 PCIe M.2 1216-soldered down module FCC ID: PD9BE201D2 IC: 1000M-BE201D2	
WLAN Combo Antenna	LG (INPAQ)	WA-P-LBLB-04-112	PCB, Mono-pole Type Main/Aux	
Keyboard	LITE-ON	SG-B7000	---	
Touch Pad	LITE-ON	SP8B00B31(SG-A0660-00A)	---	
	ELAN	SD082A-34H0	---	
Web Camera	Luxvisions	ABG213N3x	x: A~Z; 0~9	
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet	
		80-5946-101	(Black) 10/100 Megabit Ethernet	
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet	
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet	
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100 Megabit Ethernet	
		370-50714	(Black) 10/100 Megabit Ethernet	
	Type C to LAN: Shielded, Undetached			
	ARIN TECH CO. LTD	GD-08MF-50-WH-LP12	(White) 10/100/1000 Megabit Ethernet	
GD-08MF-50-BK-LP13		(Black) 10/100/1000 Megabit Ethernet		
Type C to LAN: Shielded, Undetached, 0.12m				
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ	(B = Black),(W = White) I/P: AC 100-240V, 1.6A, 50-60Hz O/P: (PDO)DC 5.0V, 3.0A(15.0W) or DC 9.0V, 3.0A(27.0W)or DC 15.0V,3.0A (45.0W) or DC 20.0V,3.25A (65.0W) (PPS) DC 5.0-20.0V, 3.25A (Max. 65.0W) US Type, Wall-Mounted: (2C)	
			#1 Type C Cable (5A) #2 Type C Cable (3A)	

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU (Mode)		1	
Main Board	LG, 1XZ90TP MAIN B/D	V	
SUB Board	LG, 17Z90TP SUB B/D	V	
CPU	Intel, Ultra 7 255H	V	
17" LCD Panel	LG Display, LP170WQ2	V	
Storage (SSD)	SAMSUNG, 512GB+1TB	V	
Memory (RAM)	SK hynix, 32GB	V	
Battery Pack	LG, LB3122MM, 77 Wh	V	
Keyboard	LITE-ON, SG-B7000	V	
Touch Pad	LITE-ON, SP8B00B31(SG-A0660-00A)	V	
Web Camera	Luxvisions, ABG213N3A	V	
WLAN Combo Card	Intel, BE201D2W	V	
WLAN Combo Antenna	LG (INPAQ), WA-P-LBLB-04-112	V	
Type C #1	AC Adapter	LG (PI ELECTRONICS), LP65WFC20P-NJ	V
Type C #2	Link to LAN Gender	ARIN (10/100/1000Mbps)	V

### 3.7. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Correction Factor (dB)
BT	N/A	2.885	N/A

AC Conduction
Normal Operation Mode

Item	Modulation	Data Rate	Test Channel	
Radiated Test Case	Radiated Spurious Emission (30MHz~1GHz) <sup>Note 1,2</sup>	8-DPSK	3Mbps	78
	Radiated Band Edge <sup>Note 1</sup>	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
Radiated Spurious Emission <sup>Note 1,2</sup>	8-DPSK	3Mbps	00/39/78	

Item	Modulation	Data Rate	Test Channel	
Conducted Test Case	20dB/Occupied Bandwidth	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Time of Occupancy	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Number of Hopping Channels	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edges	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Spurious Emission	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

Note 1:  Mobile Device  Portable Device and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:  Lie  Side  Stand

Note 2: We performed testing of the highest and lowest data rate.

### 3.8. Output Power Setting

Centre Frequency (MHz)	Power Setting	
	GFSK	8-DPSK
2402	14.125	11.750
2441	14.125	11.750
2480	14.125	11.750

### 3.9. Tested Supporting System List

#### 3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	DELL	U2718Qb	CN-0M5R5F-QDC00-99P-04CL	N/A
2.	USB Mouse	Lenovo	SM-8823	8SSM50L24506AVLC99H049R	N/A
3.	Earphone	APPLE	N/A	N/A	N/A
<b>Partner System</b>					
4.	WiFi Router	ASUS	RT-BE96U	RBIG6G200822ZT7	FCC ID: MSQ-RTBE6G00

#### 3.9.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8 m
3.	Earphone Cable: Unshielded, Undetachable, 1.2m
4.	AC adapter: M/N: ADD011, DC Power Cable: Unshielded, Detachable, 1.8m, Bonded two ferrite cores AC Power Cord: Unshielded, Detachable, 1.1m LAN cable: Unshielded, Detachable, 3.0m
5.	LAN cable: Unshielded, Detachable, 1.8m

### 3.10. Setup Configuration

#### 3.10.1. EUT Configuration for Power Line & Radiated Emission

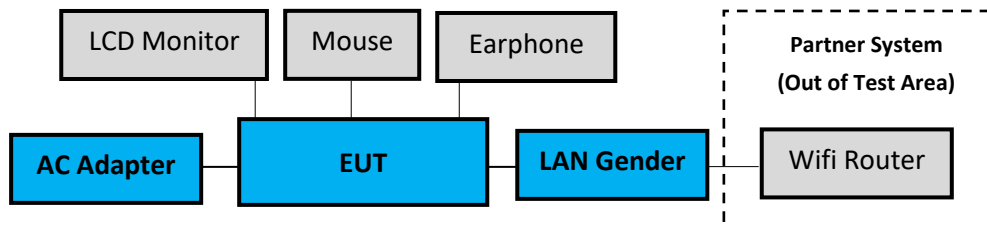

#### 3.10.2. EUT Configuration for RF Conducted Test Items



### 3.11. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT BT function under continuous transmitting and choosing data rate/ channel.

### 3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

### 3.13.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities		Frequency Range	Uncertainty	
Conduction Test	<input type="checkbox"/>	No. 7 Shielded Room	9kHz-150kHz	±3.6dB
			150kHz-30MHz	±3.3dB
	<input checked="" type="checkbox"/>	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.3dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.5dB
			6GHz-18GHz, 3m	±4.0dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.9dB
			1GHz-6GHz, 3m	±4.2dB
			6GHz-18GHz, 3m	±3.8dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.6dB
	Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.4dB

Remark : Uncertainty =  $ku_c(y)$





**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Item	Uncertainty
20dB Bandwidth	$\pm 0.2\text{kHz}$
99% Occupied Bandwidth	$\pm 0.38\%$
Carrier Frequency Separation	$\pm 0.2\text{kHz}$
Time of Occupancy	$\pm 0.03\text{sec}$
Maximum peak Output power	$\pm 0.52\text{dB}$
Conducted Emission Limitations	$\pm 0.13\text{dB}$

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2024.01.09	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2023.11.13	1 Year
3.	FOUR-LINE V-NETWORK	R&S	ENV432	101567	2024.06.07	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2023.12.09	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2024.04.11	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2024.09.04	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

### 4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2024.08.12	1 Year
2.	Spectrum Analyzer	Agilent	N9010A-526	MY48031076	2024.08.23	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2024.06.18	1 Year
4.	Amplifier	EMCI	EMC9145	980751	2024.07.09	1 Year
5.	Amplifier	HP	8447D	2944A06305	2023.12.20	1 Year
6.	Microwave Preamplifier	HP	8449B	3008A01284	2024.06.11	1 Year
7.	Microwave Amplifier	Keysight	83051A	MY56480113	2024.09.11	1 Year
8.	Loop antenna	Electro-Metrics	EMCI-LPA600	287	2024.07.31	1 Year
9.	Bilog Antenna	TESEQ	CBL6112D	33821	2024.02.17	1 Year
10.	Double-Ridged Waveguide Horn	EMCO	3115	9112-3775	2024.04.30	1 Year
11.	Horn Antenna	COM-POWER	AH-840	101092	2024.01.12	1 Year
12.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/ E130.5-O/O	2	2024.04.11	1 Year
13.	High-Pass Filter	Microwave	H3G018G1	484796	2024.04.11	1 Year
14.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2024.01.05	1 Year
15.	Coaxial Cable	HUBER+SUHNER	RG223/U	RE-33	2024.03.01	1 Year
16.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2024.01.05	1 Year
17.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2024.08.20	1 Year
18.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2024.04.11	1 Year
19.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

### 4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2024.03.29	1 Year
2.	Power Meter	Anritsu	ML2495A	2127005	2023.11.21	1 Year
3.	Power Sensor	Anritsu	MA2411B	1911360	2023.11.29	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2024.04.11	1 Year


## 5. CONDUCTED EMISSION

### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block Diagram of EUT

Indicated as section 3.10

#### 5.1.2. Shielded Room Setup Diagram

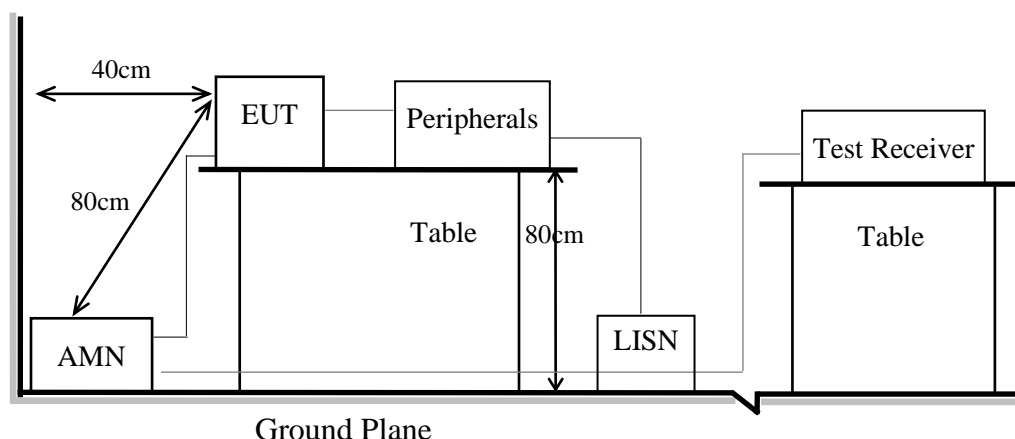

### 5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB $\mu$ V	56 ~ 46 dB $\mu$ V
500kHz ~ 5MHz	56 dB $\mu$ V	46 dB $\mu$ V
5MHz ~ 30MHz	60 dB $\mu$ V	50 dB $\mu$ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

### 5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

### 5.4. Test Results

Please refer to Appendix A.


## 6. RADIATED EMISSION

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of EUT

Indicated as section 3.10


#### 6.1.2. Setup Diagram for 9kHz-30MHz

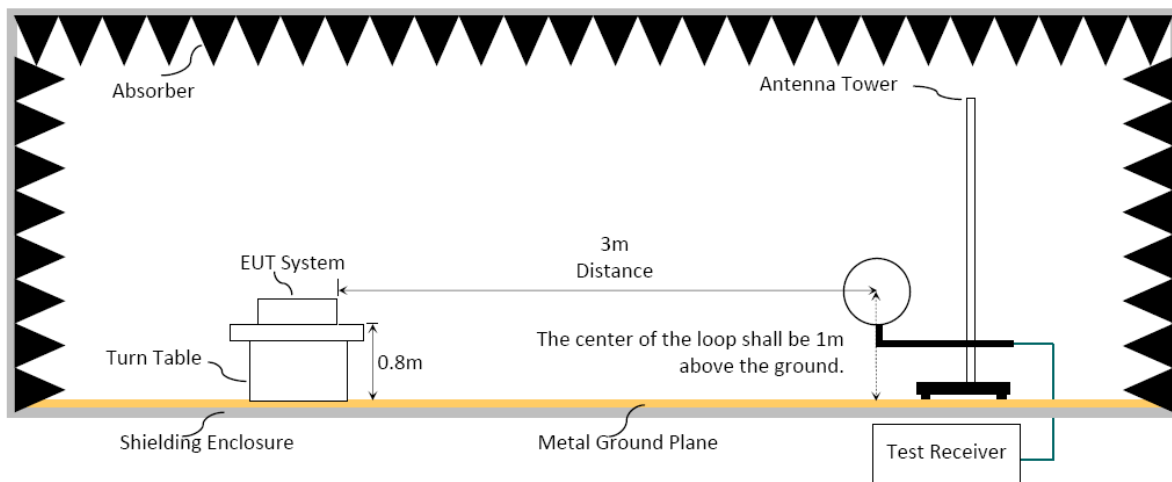

#### 6.1.3. Setup Diagram for 30-1000MHz

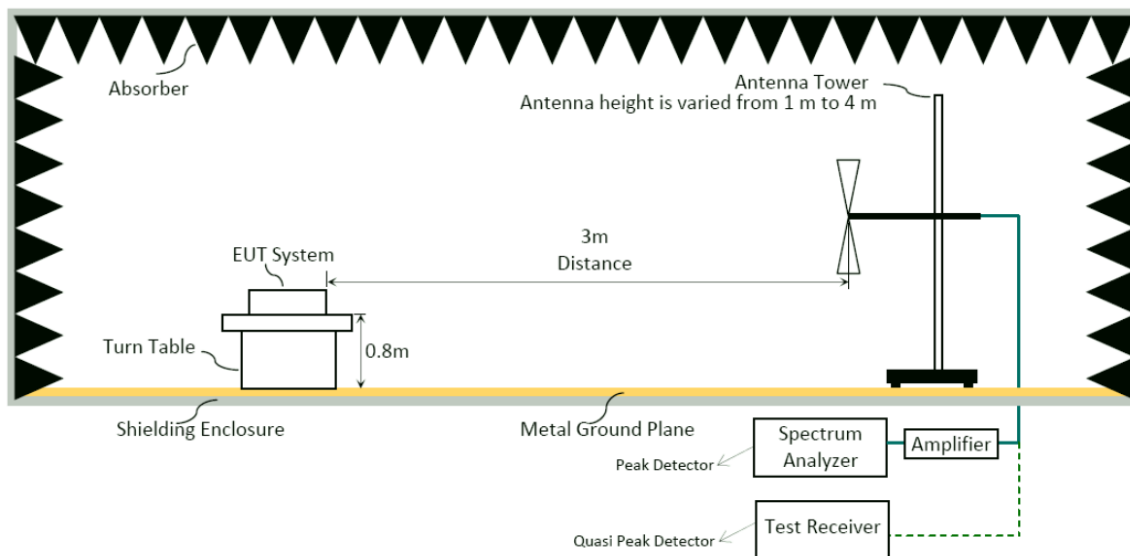

### 6.1.4. Setup Diagram for above 1GHz

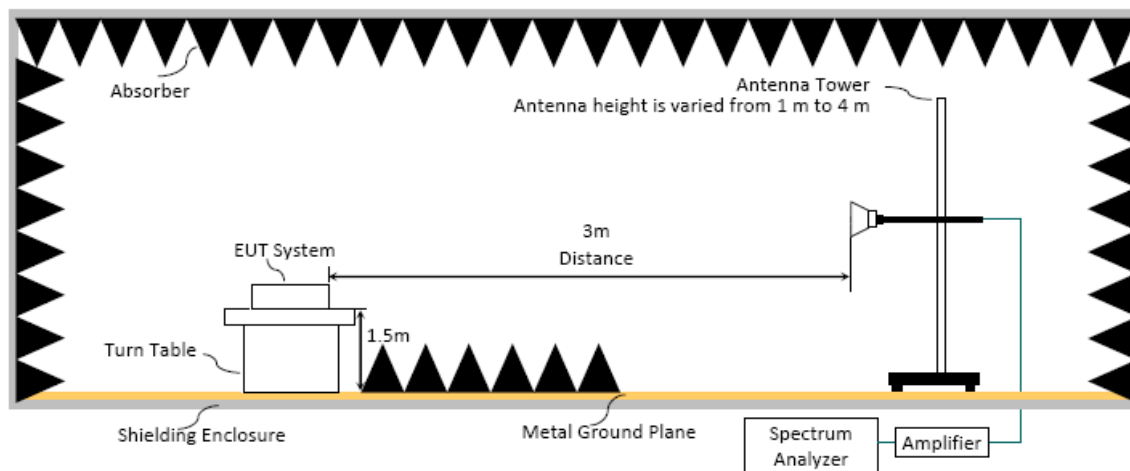

## 6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

### 6.3. Test Procedure

#### Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)  
Q.P. (490kHz-30MHz)

#### Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turntable which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

#### Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

#### Frequency above 1GHz to 10th harmonic(up to 25 GHz):

##### Peak Detector:

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

### Average Detector:

#### Option 1:

(1) RBW = 1MHz

(2) VBW  $\geq$  1/ T

Mode	TX <sub>on</sub> (ms)	1/ TX <sub>on</sub> (kHz)	VBW(>1/ TX <sub>on</sub> ) (kHz)
BT	2.880	0.347	3

(3) Detector = Peak.

(4) Sweep time = auto.

(5) Trace mode = max hold.

(6) Allow sweeps to continue until the trace stabilizes.

#### Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

## 6.4. Measurement Result Explanation

Peak Emission Level (dB $\mu$ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB $\mu$ V).

Average Emission Level (dB $\mu$ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB $\mu$ V).

Average Emission Level (dB $\mu$ V/m) = Peak Emission Level (dB $\mu$ V/m) + DCCF (dB) – Duty Cycle Correction Factor (DCCF) (dB) =  $20\log(\text{TX}_{\text{on}}/\text{TX}_{\text{on+off}})$  presented in section 3.7.

ERP (dBm) = Peak Emission Level (dB $\mu$ V/m) - 95.2dB - 2.14dB


## 6.5. Test Results

Please refer to Appendix A.



## 7. 20dB/OCCUPIED BANDWIDTH

### 7.1. Block Diagram of Test Setup

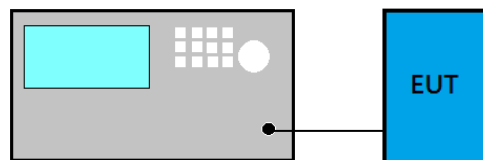

### 7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### For 20dB Bandwidth

- (1) Set Span range 2~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set VBW  $\geq 3 \times$  RBW.
- (4) Detector = Peak.
- (5) Trace mode = Max hold.
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.
- (8) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

#### For 99% Occupied Bandwidth


- (9) Set Span range 1.5~5 times the OBW
- (10) Set RBW close to 1% to 5% of OBW.
- (11) Set VBW  $\geq 3 \times$  RBW.
- (12) Detector = Peak.
- (13) Trace mode = Max hold
- (14) Sweep = Auto couple.
- (15) Allow the trace to stabilize.

### 7.4. Test Results

Please refer to Appendix A

## 8. CARRIER FREQUENCY SEPARATION

### 8.1. Block Diagram of Test Setup

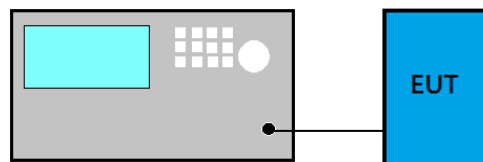

### 8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

### 8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = Wide enough to capture the peaks of two adjacent channels
- (2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- (3)  $VBW \geq RBW$
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold
- (7) Allow the trace to stabilize.

### 8.4. Test Results

Please refer to Appendix A

## 9. TIME OF OCCUPANCY

### 9.1. Block Diagram of Test Setup

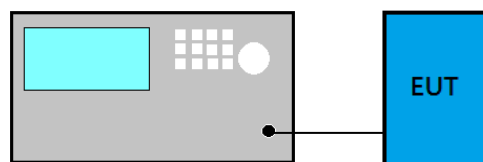

### 9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

### 9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: Zero span, centered on a hopping channel.
- (2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel.
- (3) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- (4) Detector function = Peak
- (5) Trace = Max hold

### 9.4. Test Results

Please refer to Appendix A

## 10. NUMBER OF HOPPING CHANNELS

### 10.1. Block Diagram of Test Setup

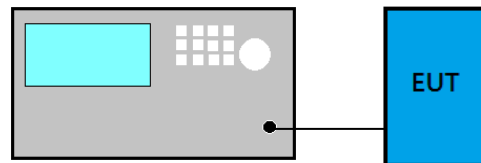

### 10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

### 10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- (2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- (3) VBW  $\geq$  RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = m=Max hold
- (7) Allow the trace to stabilize.

### 10.4. Test Results

Please refer to Appendix A

## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1. Block Diagram of Test Setup

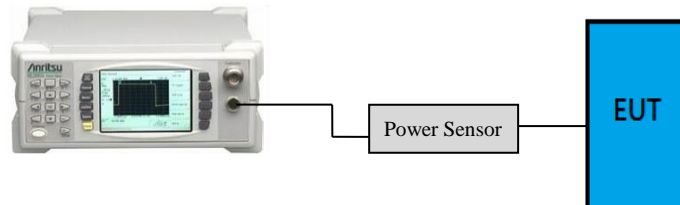

### 11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

### 11.3. Test Procedure


EUT is connected to power sensor and record the maximum output power.

### 11.4. Test Results

Please refer to Appendix A

## 12. EMISSION LIMITATIONS

### 12.1. Block Diagram of Test Setup

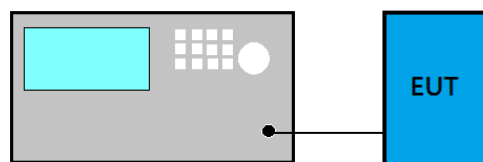

### 12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6., must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

### 12.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10<sup>th</sup> harmonic.
- (2) RBW = 100 kHz
- (3) VBW  $\geq$  RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

### 12.4. Test Results

Please refer to Appendix A



## **13. DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**



*Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan*

*Tel: +886 2 26099301  
Fax: +886 2 26099303*

---

# APPENDIX A

## TEST DATA AND PLOTS

(Model: 17Z90TP)




## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	9
A.2.3 Emissions in Non-restricted Frequency Bands:.....	10
<b>A.3 20dB BANDWIDTH</b> .....	<b>11</b>
A.3.1 20dB Bandwidth Result.....	11
A.3.2 Measurement Plots .....	12
<b>A.4 CARRIER FREQUENCY SEPARATION</b> .....	<b>13</b>
<b>A.5 TIME OF OCCUPANCY</b> .....	<b>15</b>
A.5.1 Time of Occupancy .....	15
<b>A.6 NUMBER OF HOPPING CHANNELS</b> .....	<b>25</b>
<b>A.7 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>26</b>
A.7.1 Maximum Peak Output Power.....	26
A.7.2 Average Output Power (Reporting only).....	26
<b>A.8 EMISSION LIMITATIONS MEASUREMENT</b> .....	<b>27</b>
A.8.1 Band Edge.....	27
A.8.2 Spurious Emission .....	29

## A.1 CONDUCTED EMISSION

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

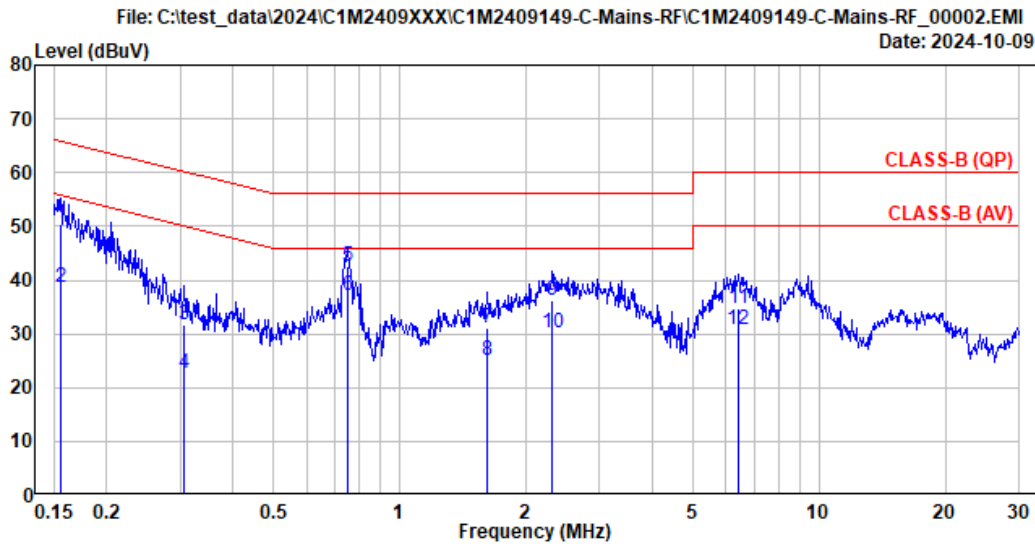


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	30.38	50.53	65.67	15.14	QP
2	0.156	10.27	0.03	9.85	18.58	38.73	55.67	16.94	Average
3	0.306	10.26	0.03	9.85	11.66	31.80	60.08	28.28	QP
4	0.306	10.26	0.03	9.85	2.58	22.72	50.08	27.36	Average
5	0.750	10.27	0.04	9.85	22.28	42.44	56.00	13.56	QP
6	0.750	10.27	0.04	9.85	16.93	37.09	46.00	8.91	Average
7	1.617	10.28	0.05	9.86	10.88	31.07	56.00	24.93	QP
8	1.617	10.28	0.05	9.86	4.95	25.14	46.00	20.86	Average
9	2.315	10.30	0.06	9.86	15.97	36.19	56.00	19.81	QP
10	2.315	10.30	0.06	9.86	9.96	30.18	46.00	15.82	Average
11	6.398	10.45	0.10	9.87	14.32	34.74	60.00	25.26	QP
12	6.398	10.45	0.10	9.87	10.24	30.66	50.00	19.34	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

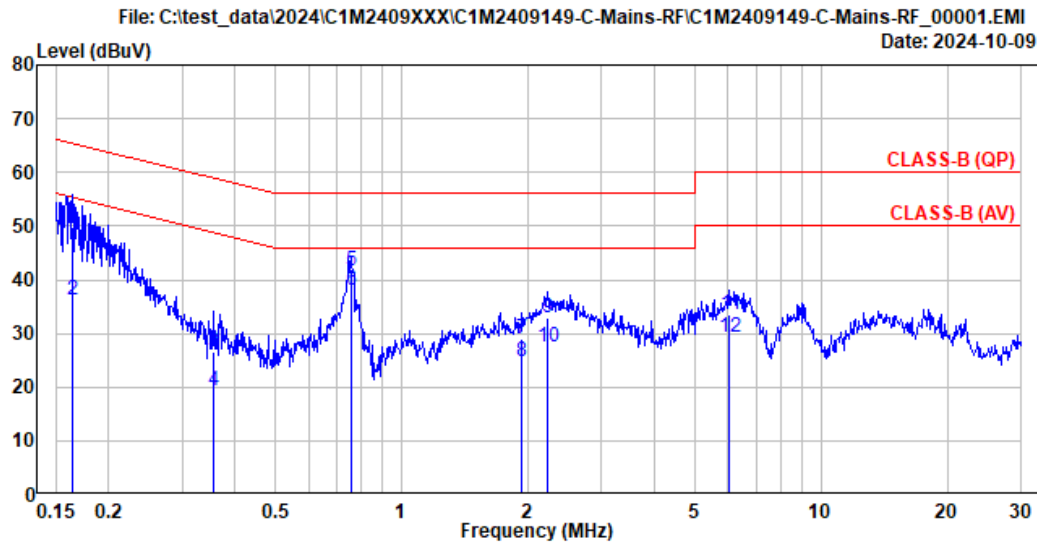

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.164	10.26	0.03	9.85	29.66	49.80	65.25	15.45	QP
2	0.164	10.26	0.03	9.85	16.08	36.22	55.25	19.03	Average
3	0.355	10.25	0.03	9.85	6.32	26.45	58.84	32.39	QP
4	0.355	10.25	0.03	9.85	-0.68	19.45	48.84	29.39	Average
5	0.758	10.26	0.04	9.85	21.58	41.73	56.00	14.27	QP
6	0.758	10.26	0.04	9.85	17.78	37.93	46.00	8.07	Average
7	1.934	10.27	0.06	9.86	8.79	28.98	56.00	27.02	QP
8	1.934	10.27	0.06	9.86	4.62	24.81	46.00	21.19	Average
9	2.235	10.28	0.06	9.86	12.71	32.91	56.00	23.09	QP
10	2.235	10.28	0.06	9.86	7.28	27.48	46.00	18.52	Average
11	6.057	10.37	0.10	9.87	13.05	33.39	60.00	26.61	QP
12	6.057	10.37	0.10	9.87	8.92	29.26	50.00	20.74	Average

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

## A.2 RADIATED EMISSION

Test Date	2024/10/15	Temp./Hum.	23°C/55%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Mode	BT (8DPSK)	Frequency	TX 2480MHz
------	------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.38	26.50	35.23	33.69	40.00	6.31	Peak
74.500	12.16	2.19	26.39	43.40	31.36	40.00	8.64	Peak
168.000	15.27	3.26	25.95	42.90	35.47	43.50	8.03	Peak
216.000	15.93	3.71	25.80	42.90	36.74	43.50	6.76	Peak
345.500	19.84	5.13	26.08	34.05	32.94	46.00	13.06	Peak
760.500	24.84	7.61	27.39	33.30	38.37	46.00	7.63	Peak


#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	23.14	1.39	0.00	13.99	38.52	40.00	1.48	QP
91.500	15.02	2.39	26.34	47.07	38.14	43.50	5.36	Peak
345.500	19.84	5.13	26.08	38.32	37.21	46.00	8.79	Peak
445.500	21.93	6.20	26.86	34.24	35.51	46.00	10.49	Peak
594.000	24.00	6.80	27.47	33.62	36.96	46.00	9.04	Peak
704.000	24.54	7.33	27.48	30.28	34.67	46.00	11.33	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

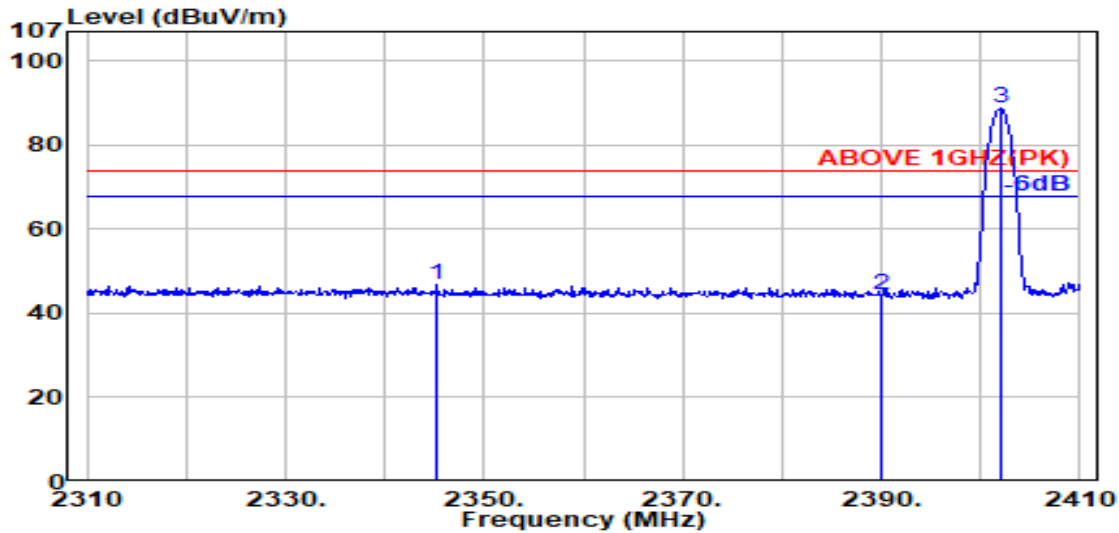

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2345.300	28.27	5.67	39.88	52.72	46.78	74.00	27.22	Peak
2390.000	28.14	5.72	39.88	50.34	44.33	74.00	29.67	Peak
@ 2402.000	28.11	5.74	39.88	94.71	88.67	---	---	Peak

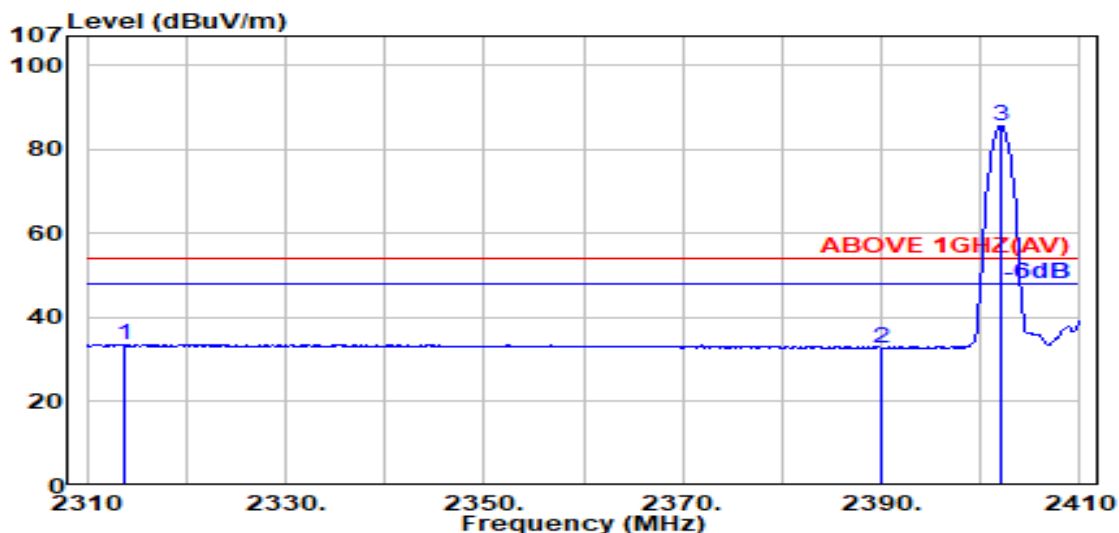


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2313.700	28.08	5.63	39.88	39.84	33.66	54.00	20.34	Average
2390.000	28.14	5.72	39.88	38.88	32.86	54.00	21.14	Average
@ 2402.100	28.11	5.74	39.88	91.54	85.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

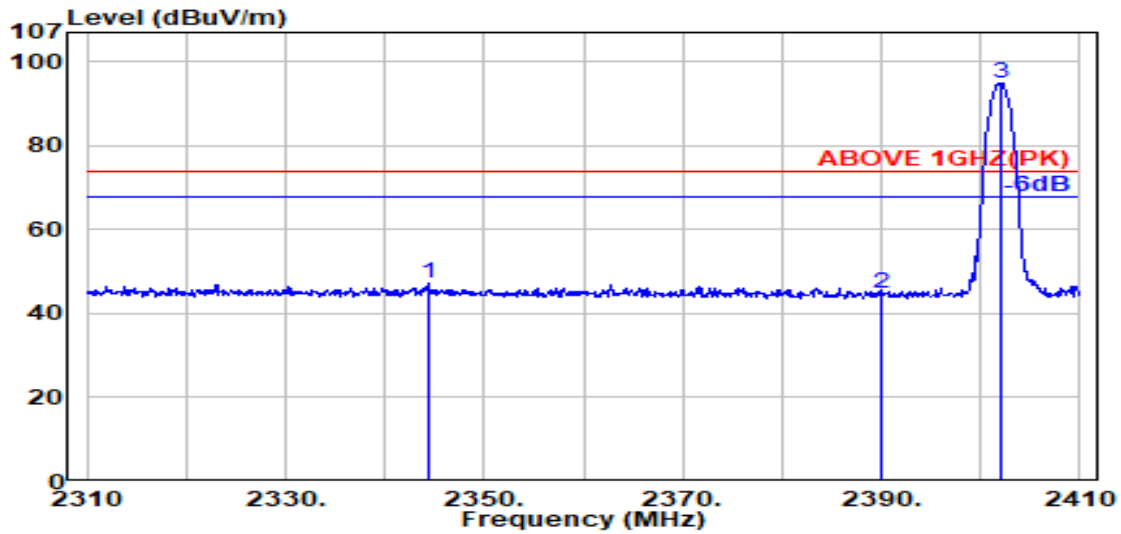

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.300	28.27	5.67	39.88	53.24	47.29	74.00	26.71	Peak
2390.000	28.14	5.72	39.88	50.79	44.77	74.00	29.23	Peak
@ 2402.000	28.11	5.74	39.88	101.08	95.04	---	---	Peak

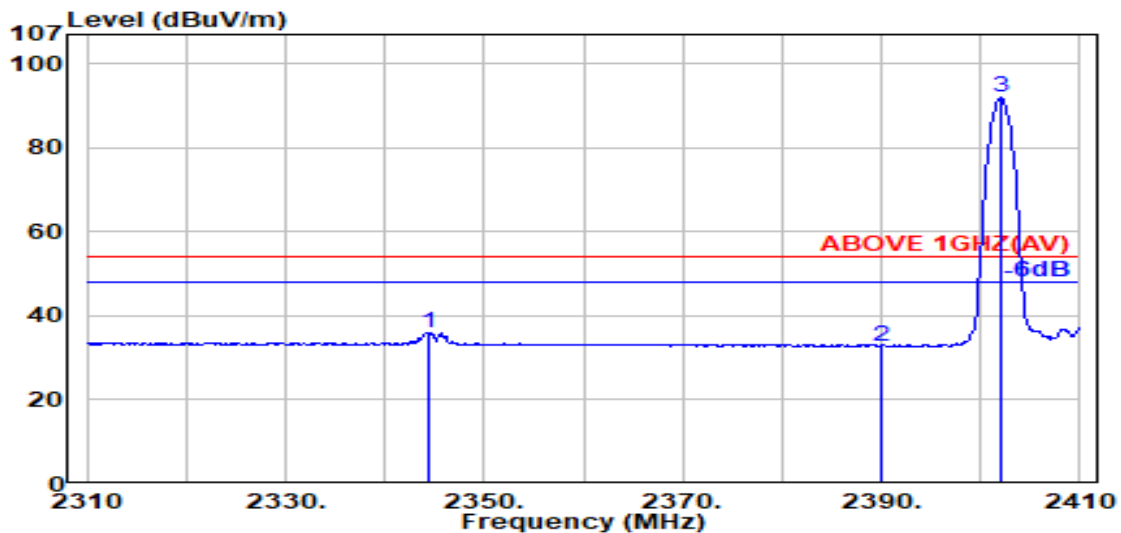


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.300	28.27	5.67	39.88	41.99	36.04	54.00	17.96	Average
2390.000	28.14	5.72	39.88	38.87	32.85	54.00	21.15	Average
@ 2402.100	28.11	5.74	39.88	97.99	91.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

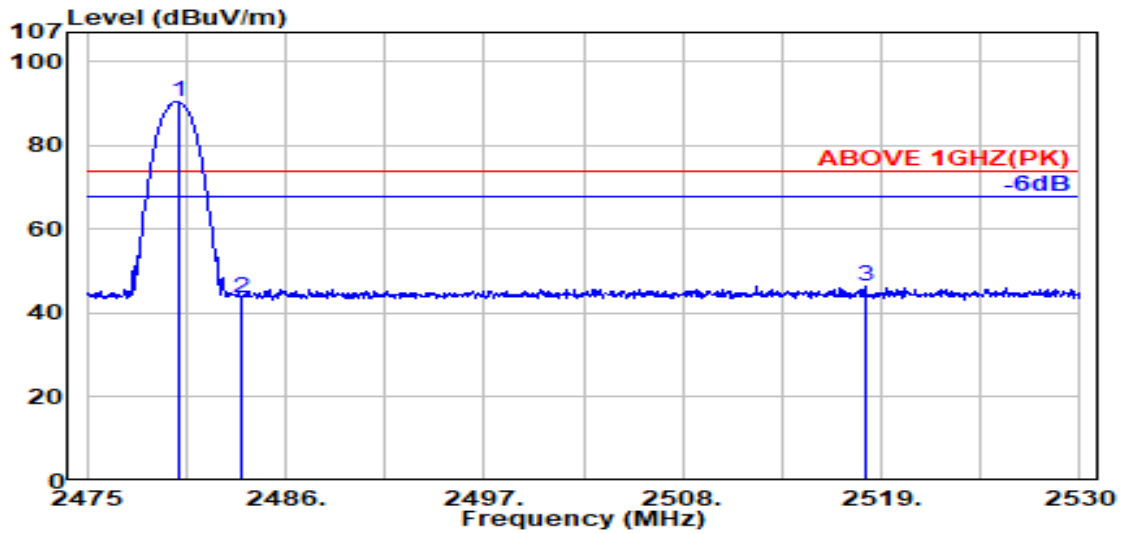

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	96.33	90.64	---	---	Peak
2483.500	28.37	5.83	39.87	49.22	43.54	74.00	30.46	Peak
2518.100	28.51	5.87	39.88	52.01	46.52	74.00	27.48	Peak

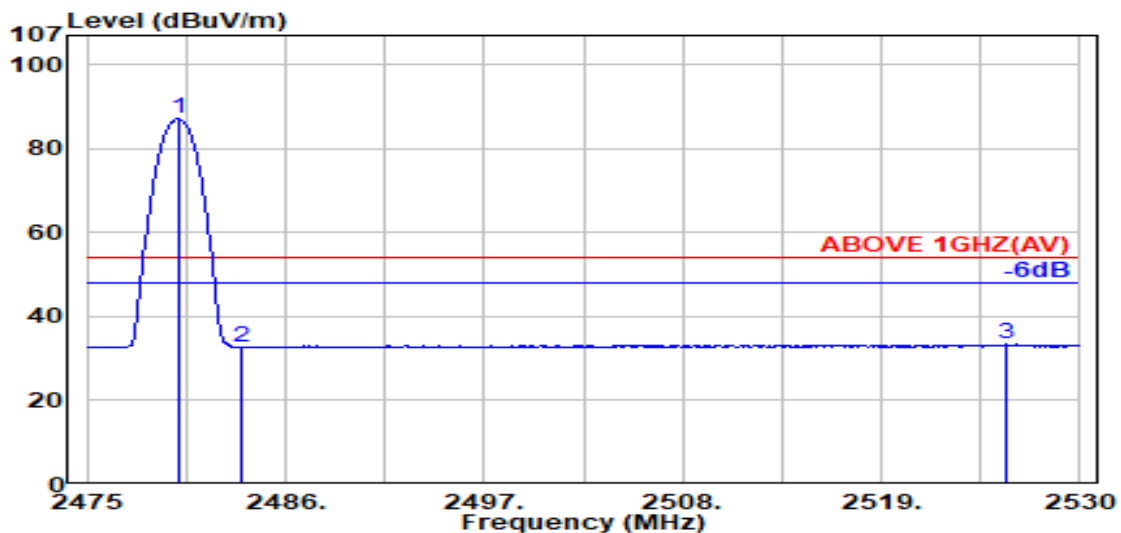


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	92.99	87.31	---	---	Average
2483.500	28.37	5.83	39.87	38.44	32.77	54.00	21.23	Average
2525.850	28.56	5.88	39.88	38.77	33.33	54.00	20.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

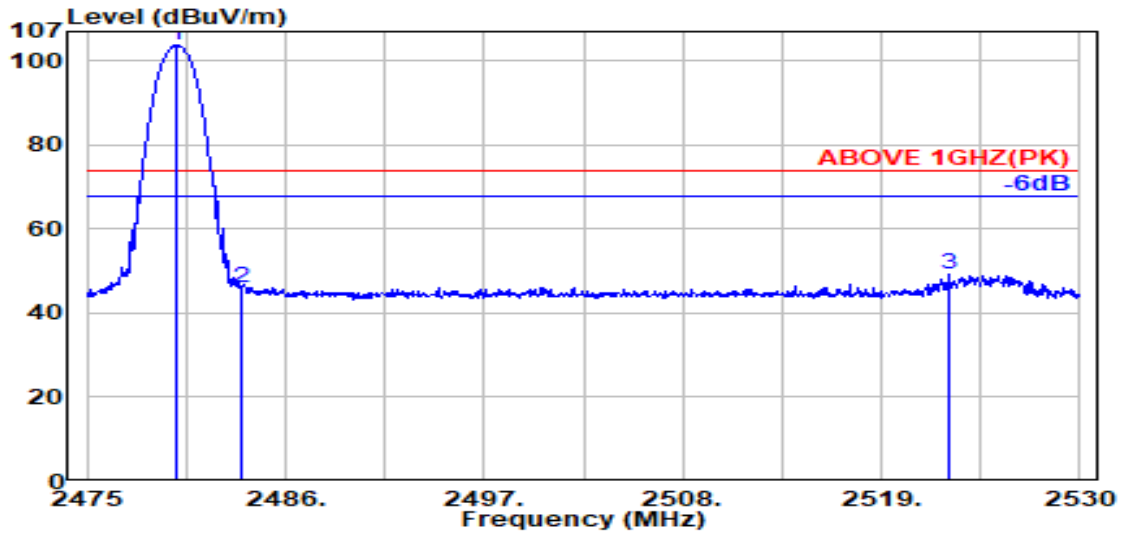

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	109.48	103.80	---	---	Peak
2483.500	28.37	5.83	39.87	51.84	46.17	74.00	27.83	Peak
2522.700	28.54	5.88	39.88	54.64	49.18	74.00	24.82	Peak

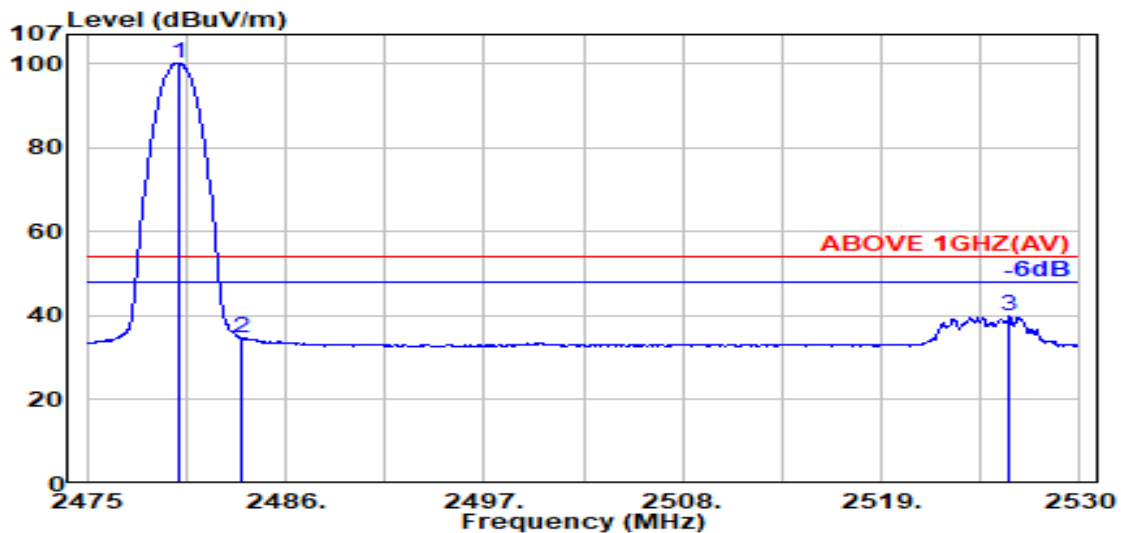

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	106.02	100.33	---	---	Average
2483.500	28.37	5.83	39.87	40.51	34.84	54.00	19.16	Average
2526.100	28.56	5.88	39.88	45.22	39.78	54.00	14.22	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.



### A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BT (8DPSK)	Frequency	TX 2402MHz
------	------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	40.64	42.38	54.00	11.62	Peak
7206.000	36.11	10.03	39.40	37.54	44.27	54.00	9.73	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.18	40.92	54.00	13.08	Peak
7206.000	36.11	10.03	39.40	37.82	44.56	54.00	9.44	Peak

Mode	BT (8DPSK)	Frequency	TX 2441MHz
------	------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.16	8.16	39.26	39.59	41.65	54.00	12.35	Peak
7323.000	36.40	10.09	39.44	37.25	44.31	54.00	9.69	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.16	8.16	39.26	40.13	42.19	54.00	11.81	Peak
7323.000	36.40	10.09	39.44	37.87	44.93	54.00	9.07	Peak

Mode	BT (8DPSK)	Frequency	TX 2480MHz
------	------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	40.50	42.71	54.00	11.29	Peak
7440.000	36.38	10.15	39.46	37.57	44.63	54.00	9.37	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	41.44	43.65	54.00	10.35	Peak
7440.000	36.38	10.15	39.46	36.59	43.65	54.00	10.35	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

## A.3 20dB BANDWIDTH


Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.3.1 20dB Bandwidth Result

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.8805	0.83558	0.587
	2441	0.9442	0.85513	0.629
	2480	0.8807	0.83993	0.587
8-DPSK	2402	1.344	1.2332	0.895
	2441	1.3432	1.2335	0.895
	2480	1.343	1.2302	0.873


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


### A.3.2 Measurement Plots

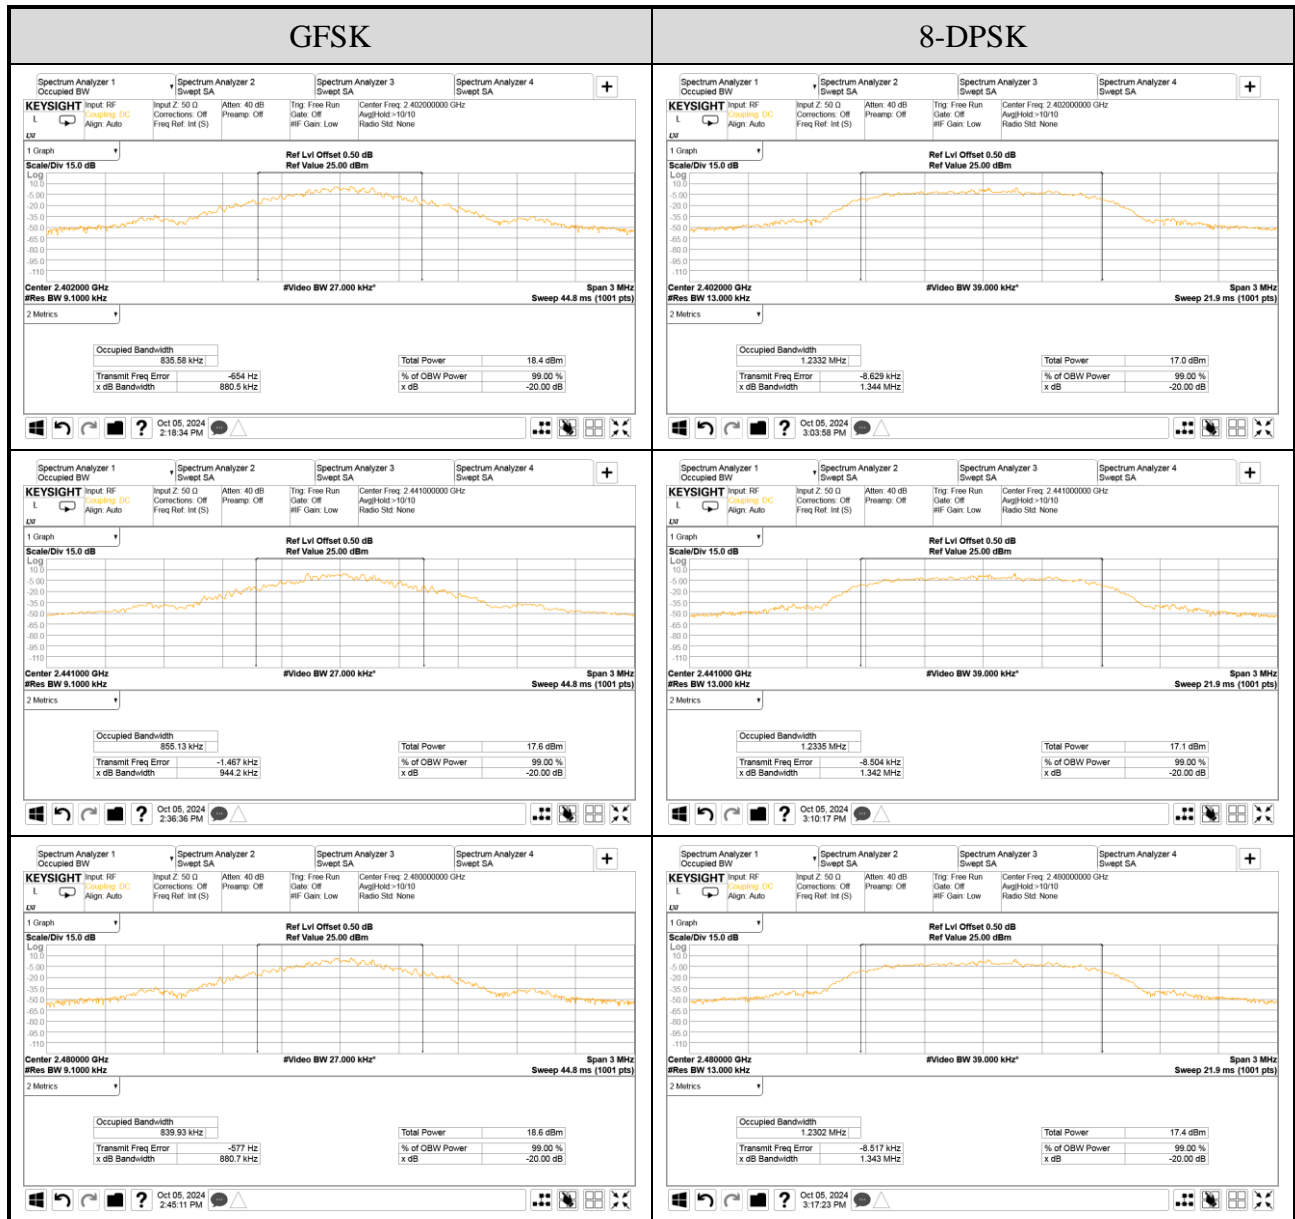

## A.4 CARRIER FREQUENCY SEPARATION

Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

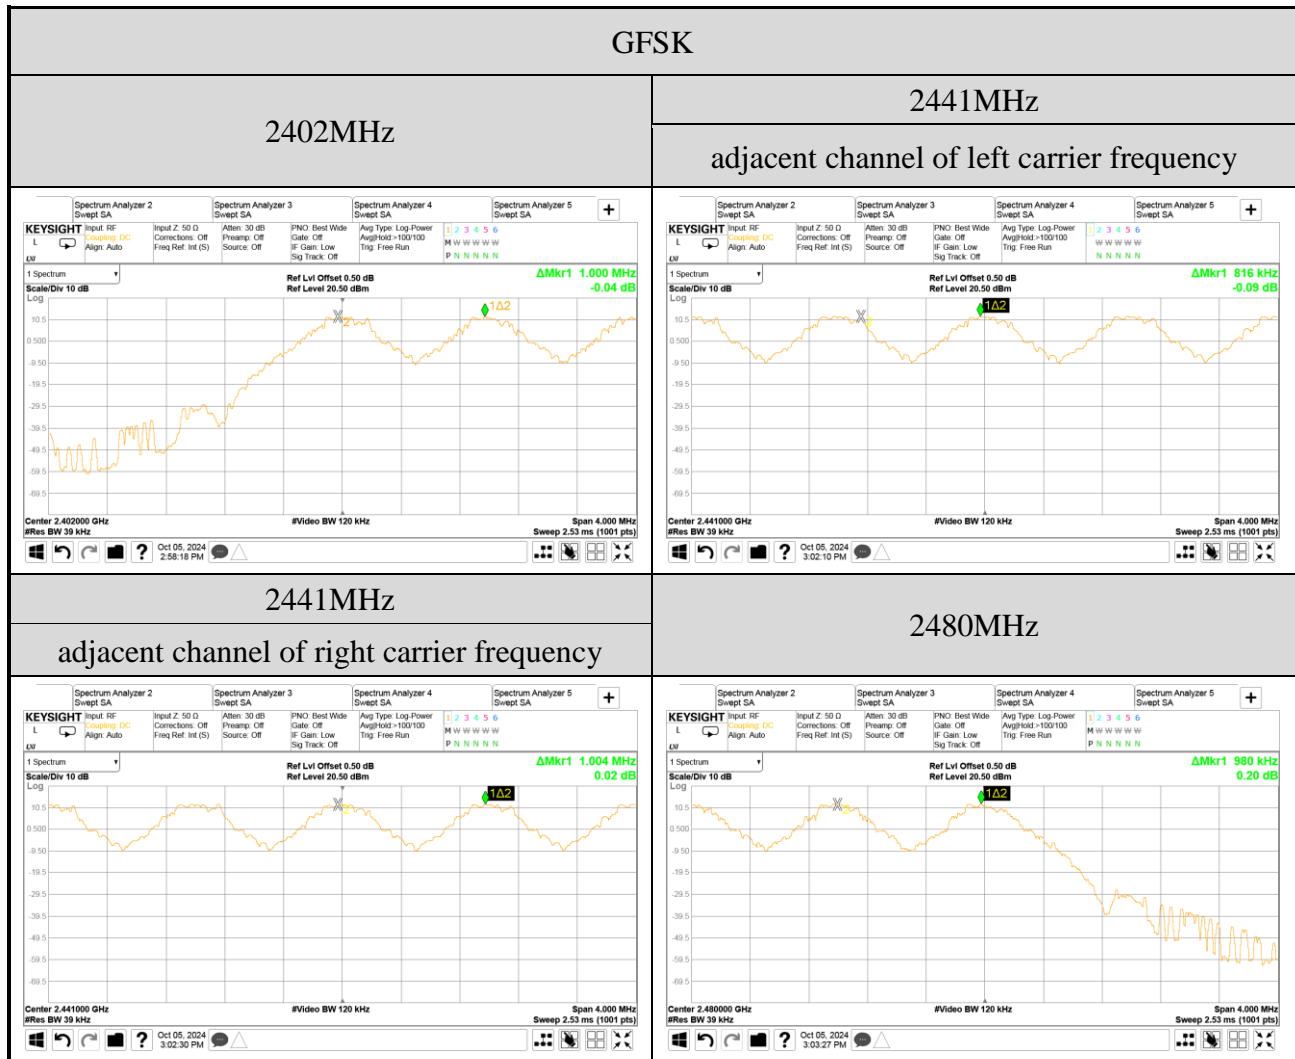

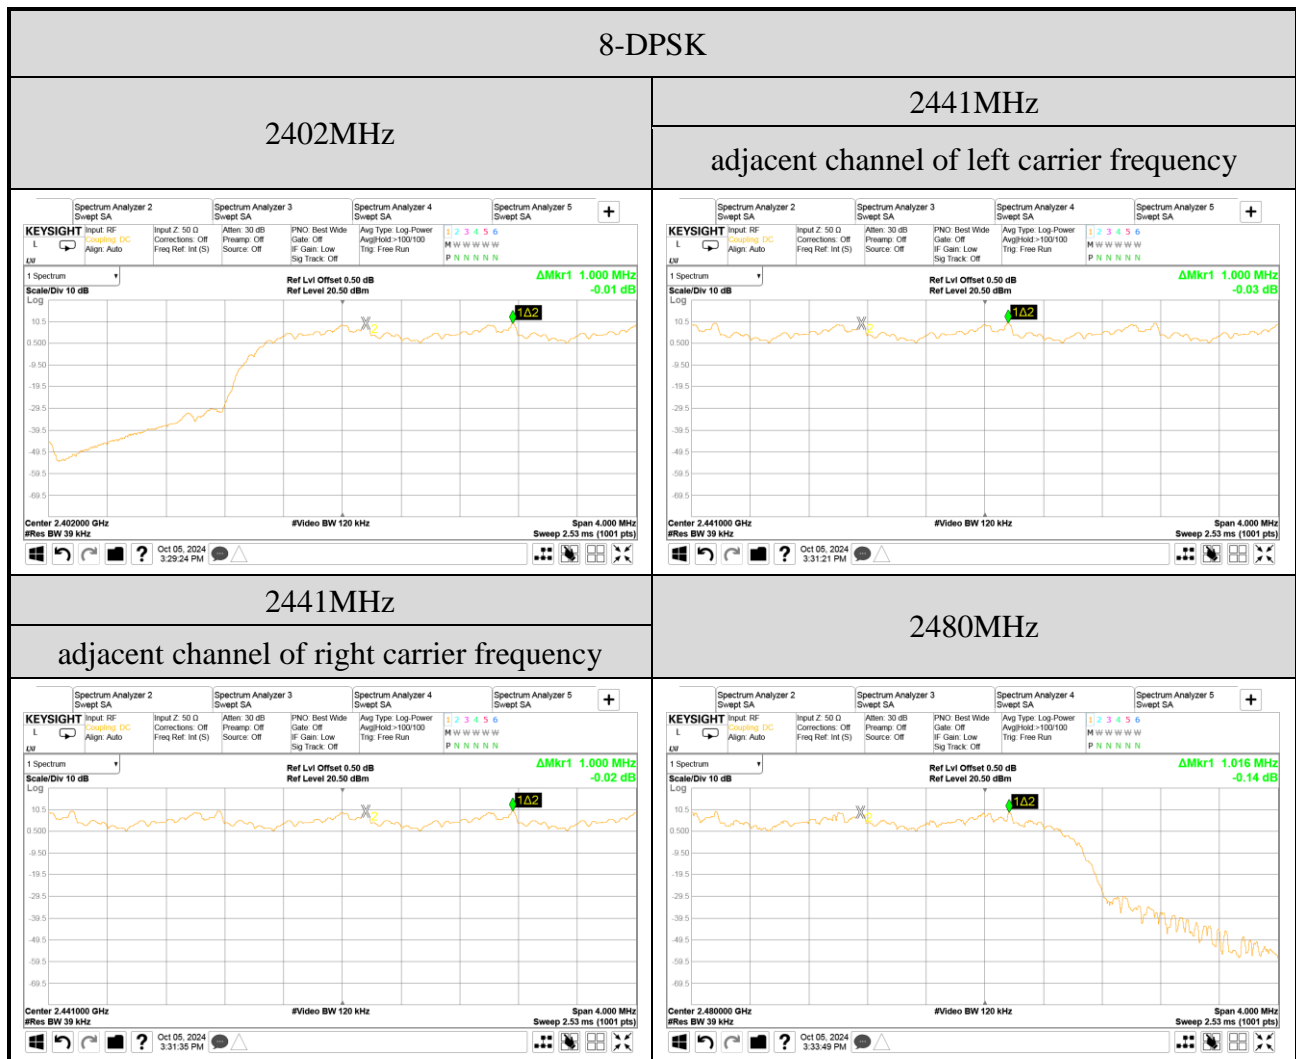

## A.5 TIME OF OCCUPANCY

Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.375	118.500	<400
		DH3	5	1.630	257.540	<400
		DH5	3	2.875	272.550	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

#### DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is  
 10 transmission \* 31.6 seconds \* 0.375 ms = 118.500 ms (<400ms)

#### DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is  
 5 transmission \* 31.6 seconds \* 1.630 ms = 257.540 ms (<400ms)

#### DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is  
 3 transmission \* 31.6 seconds \* 2.875 ms = 272.550 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2441	DH1	10	0.375	118.500	<400
		DH3	5	1.630	257.540	<400
		DH5	3	2.875	272.550	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

#### DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is  
 10 transmission \* 31.6 seconds \* 0.375 ms = 118.500 ms (<400ms)

#### DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is  
 5 transmission \* 31.6 seconds \* 1.630 ms = 257.540 ms (<400ms)

#### DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is  
 3 transmission \* 31.6 seconds \* 2.875 ms = 272.550 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.375	118.500	<400
		DH3	5	1.630	257.540	<400
		DH5	3	2.880	273.024	<400

Observation Period:

**79** channels \* **0.4** seconds = **31.6** seconds

**DH1 Mode**

For each second of **10** transmission appearance, the longest time of occupancy is  
**10** transmission \* **31.6** seconds \* **0.375** ms = **118.500** ms (<400ms)

**DH3 Mode**


For each second of **5** transmission appearance, the longest time of occupancy is  
**5** transmission \* **31.6** seconds \* **1.630** ms = **257.540** ms (<400ms)

**DH5 Mode**

For each second of **3** transmission appearance, the longest time of occupancy is  
**3** transmission \* **31.6** seconds \* **2.880** ms = **273.024** ms (<400ms)




● Measurement Plots

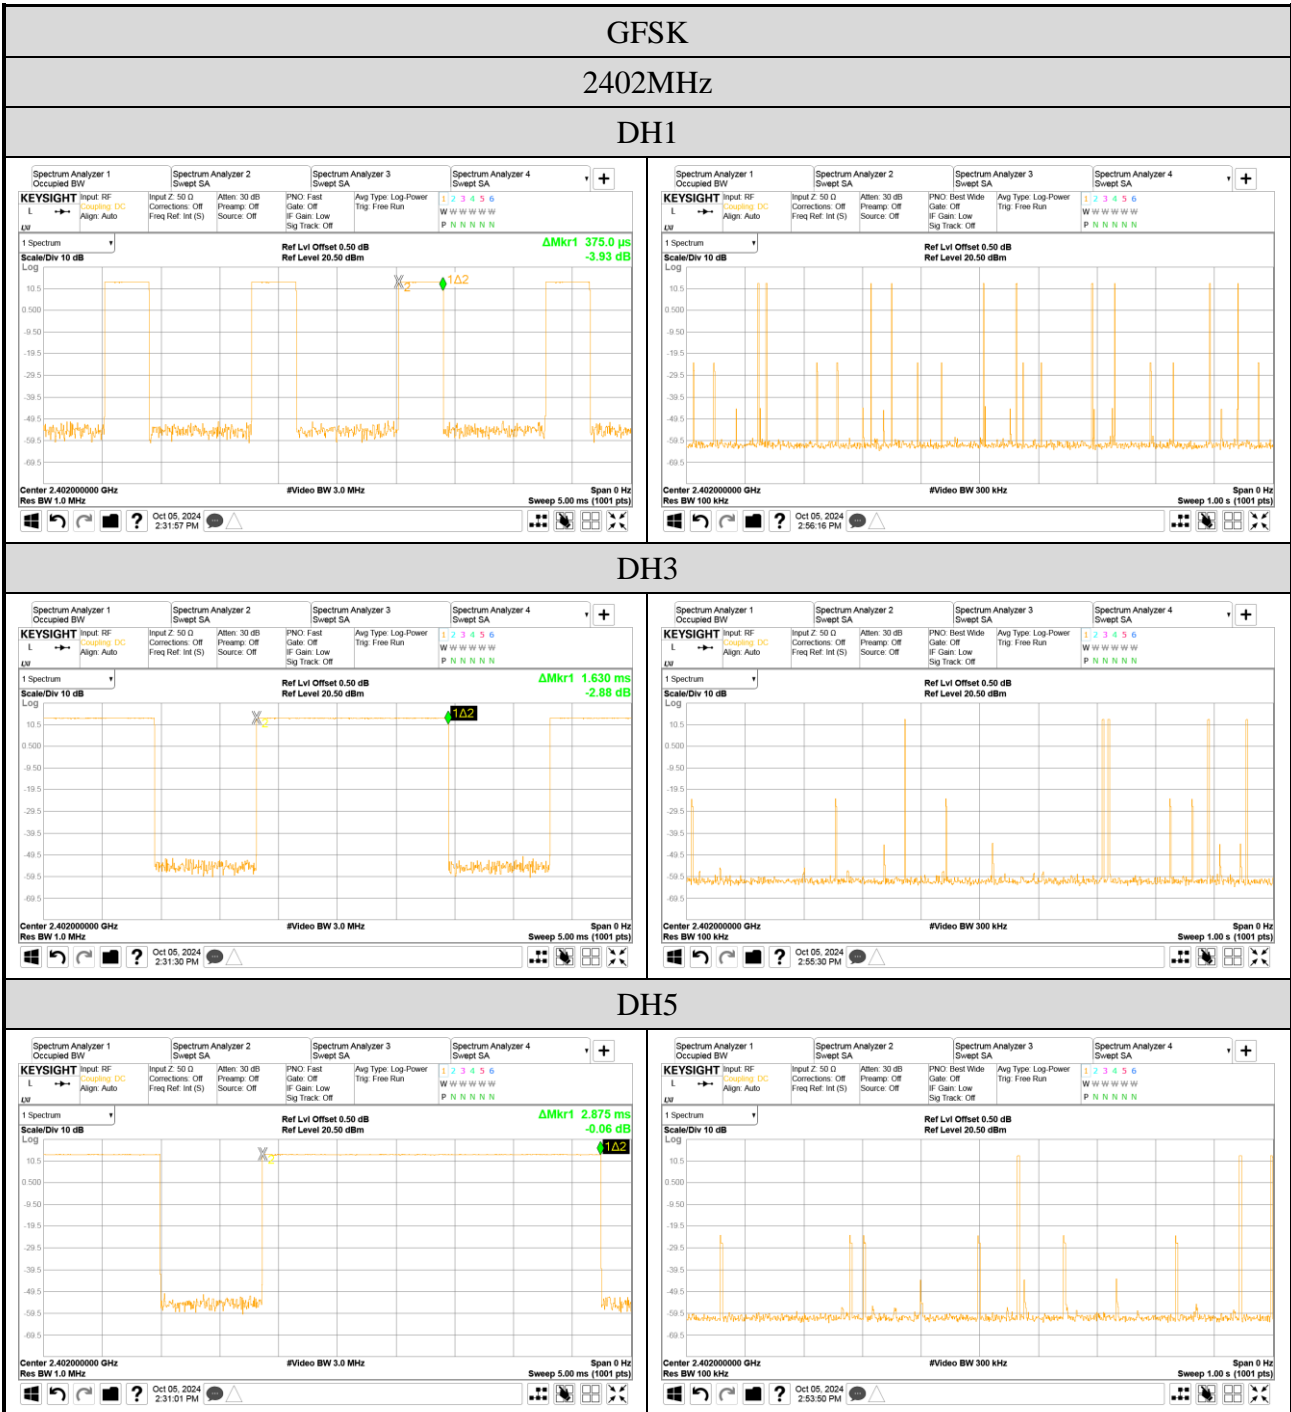


**GFSK**  
**2441MHz**


**DH1**

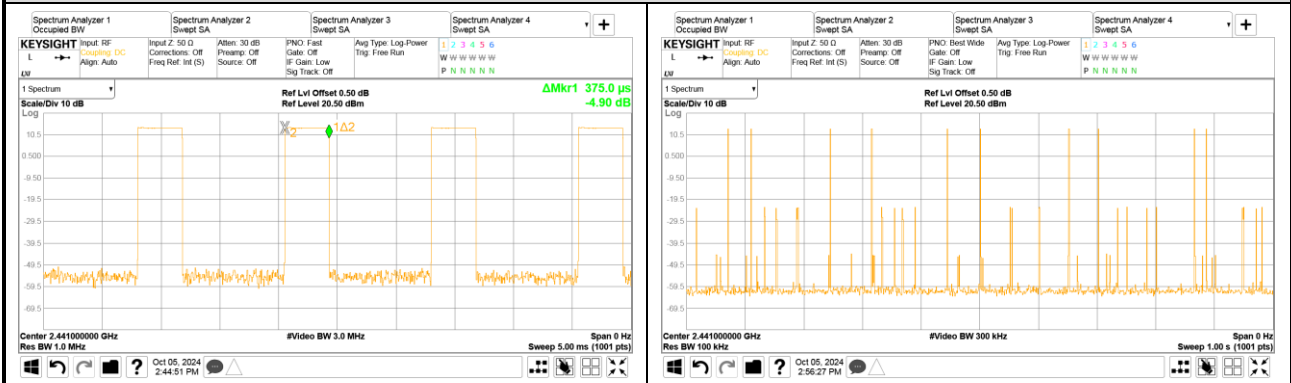

**DH3**

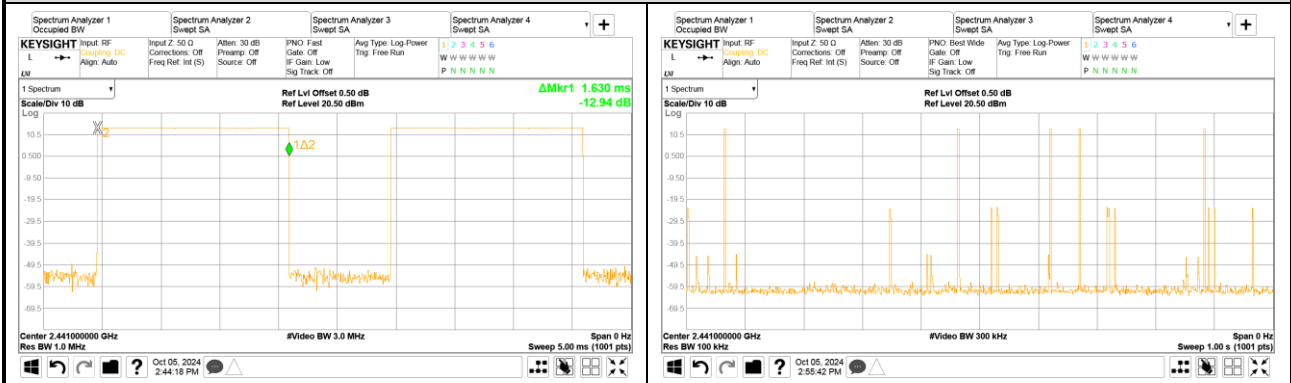


**DH5**

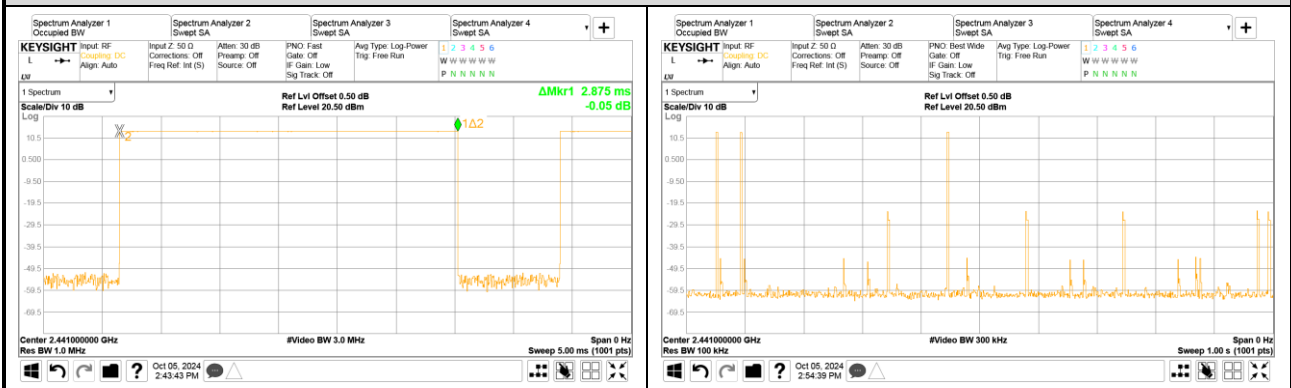


**GFSK**  
**2480MHz**


**DH1**

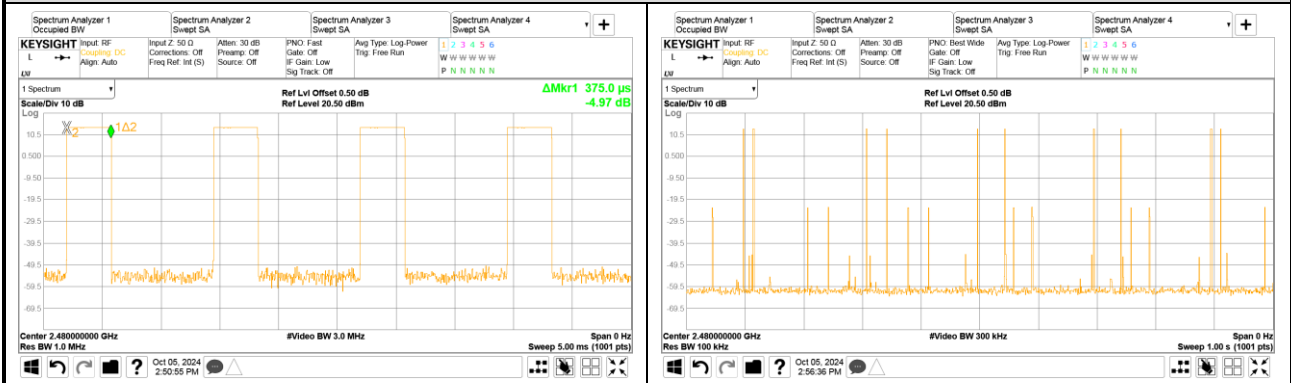

**DH3**

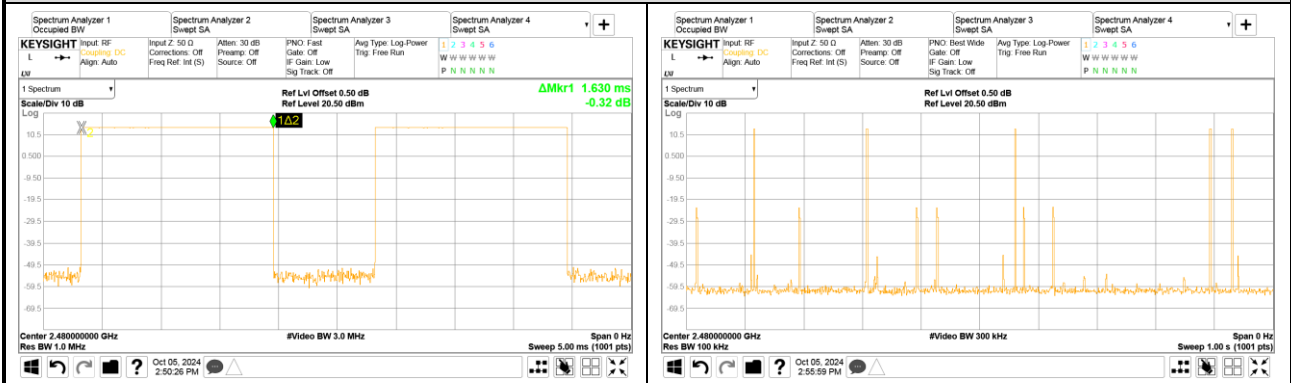

**DH5**

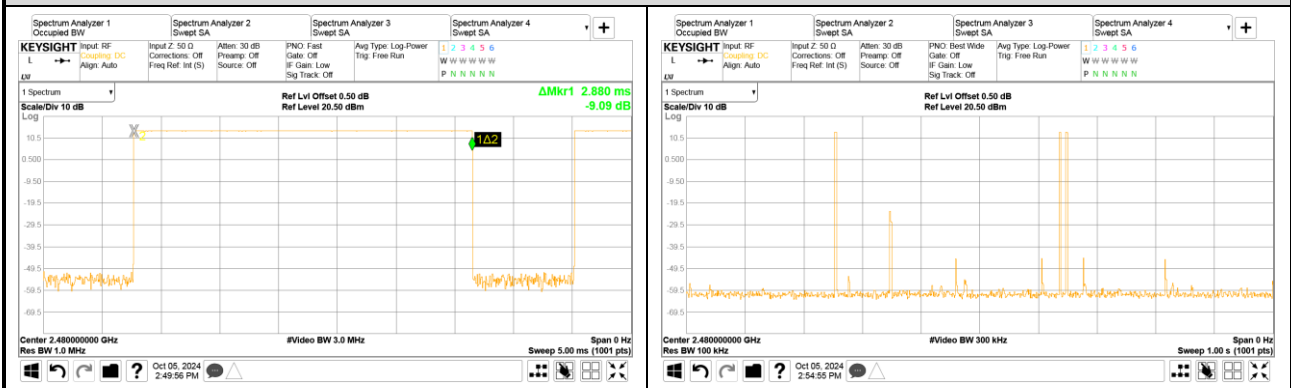

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.380	120.080	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.885	273.498	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

**3DH1 Mode**

For each second of **10** transmission appearance, the longest time of occupancy is **10** transmission \* **31.6** seconds \* **0.380** ms = **120.080** ms (<400ms)

**3DH3 Mode**

For each second of **5** transmission appearance, the longest time of occupancy is **5** transmission \* **31.6** seconds \* **1.635** ms = **258.330** ms (<400ms)

**3DH5 Mode**

For each second of **3** transmission appearance, the longest time of occupancy is **3** transmission \* **31.6** seconds \* **2.885** ms = **273.498** ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.385	121.660	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.885	273.498	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

**3DH1 Mode**

For each second of **10** transmission appearance, the longest time of occupancy is **10** transmission \* **31.6** seconds \* **0.385** ms = **121.660** ms (<400ms)

**3DH3 Mode**

For each second of **5** transmission appearance, the longest time of occupancy is **5** transmission \* **31.6** seconds \* **1.635** ms = **258.330** ms (<400ms)

**3DH5 Mode**

For each second of **3** transmission appearance, the longest time of occupancy is **3** transmission \* **31.6** seconds \* **2.885** ms = **273.498** ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.385	121.660	<400
		3DH3	5	1.630	257.540	<400
		3DH5	3	2.885	273.498	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

**3DH1 Mode**

For each second of **10** transmission appearance, the longest time of occupancy is  
**10** transmission \* **31.6** seconds \* **0.385** ms = **121.660** ms (<400ms)


**3DH3 Mode**

For each second of **5** transmission appearance, the longest time of occupancy is  
**5** transmission \* **31.6** seconds \* **1.630** ms = **257.540** ms (<400ms)

**3DH5 Mode**

For each second of **3** transmission appearance, the longest time of occupancy is  
**3** transmission \* **31.6** seconds \* **2.885** ms = **273.498** ms (<400ms)


● Measurement Plots

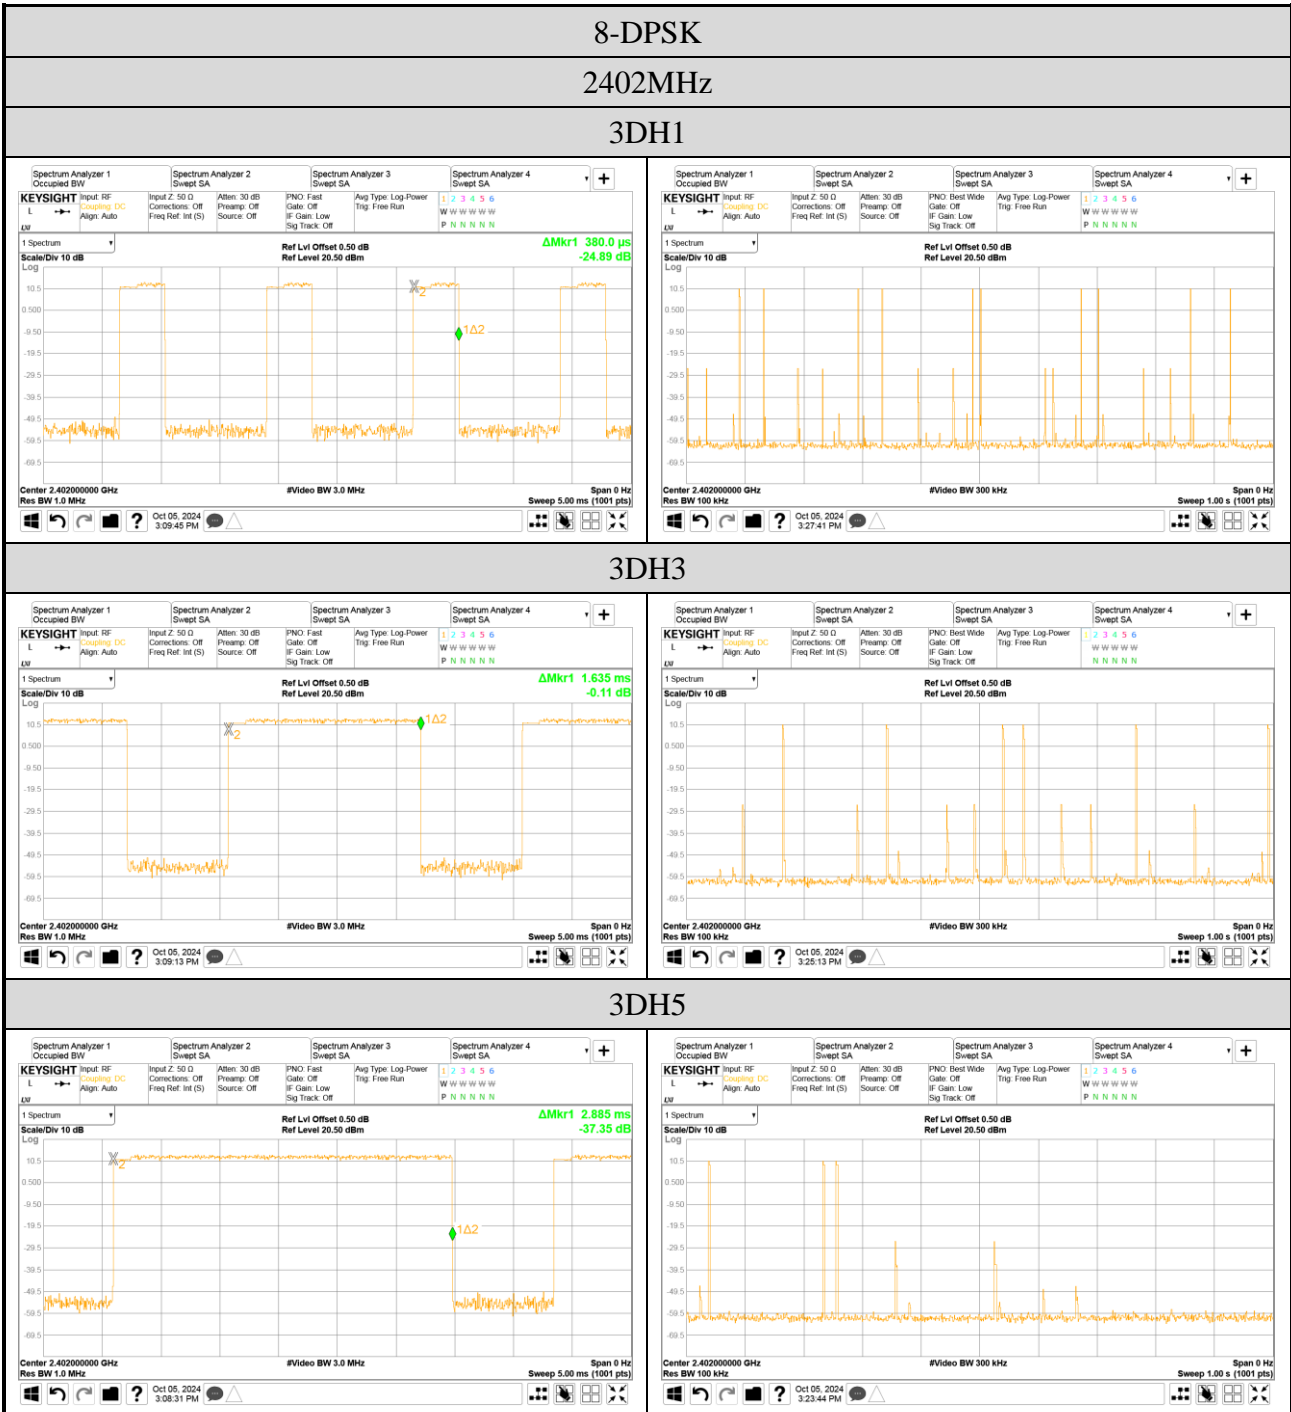


8-DPSK

2441MHz


3DH1

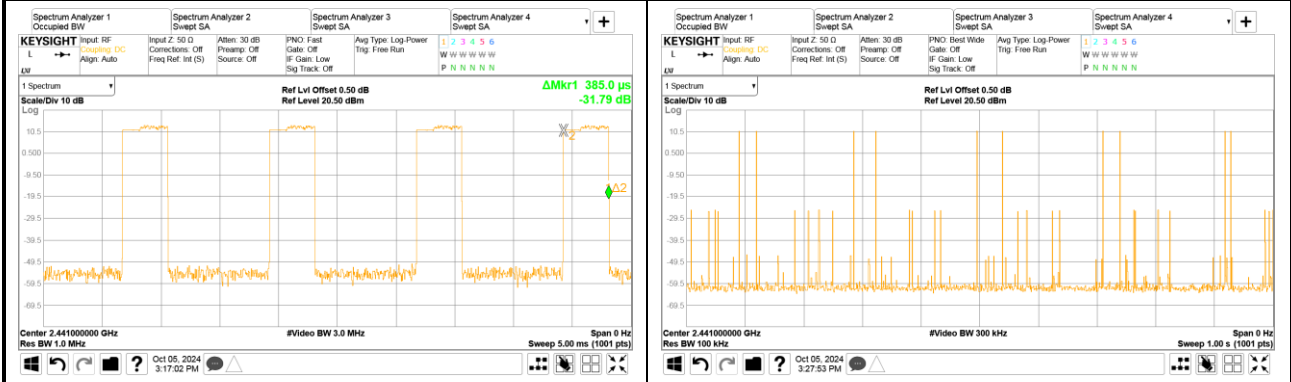


3DH3

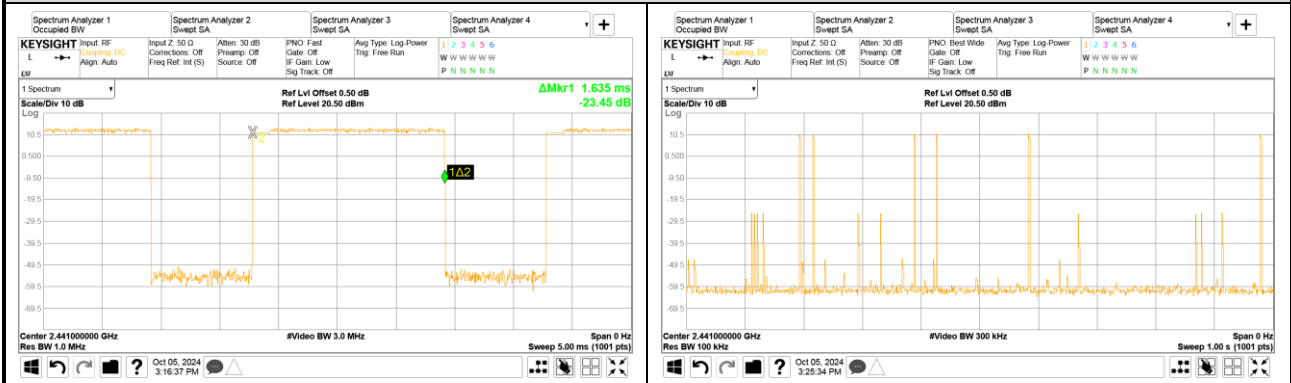

3DH5

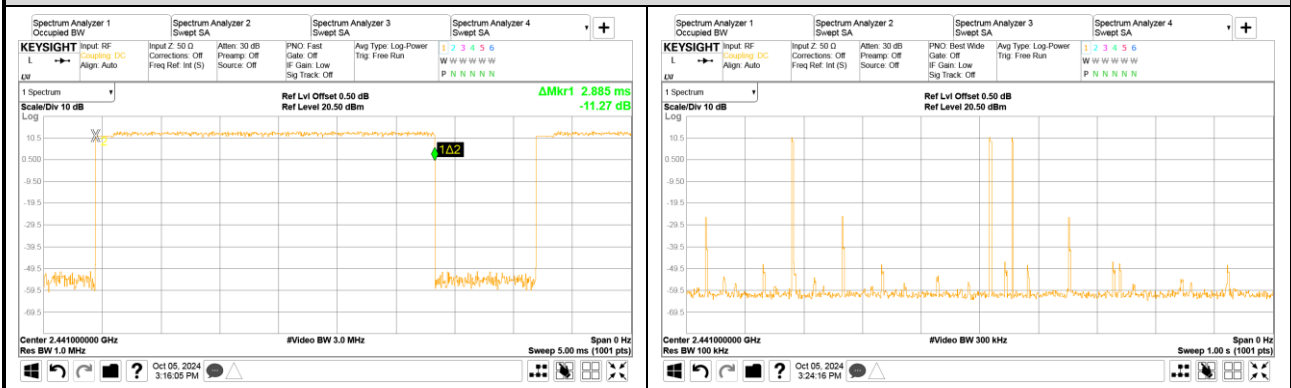


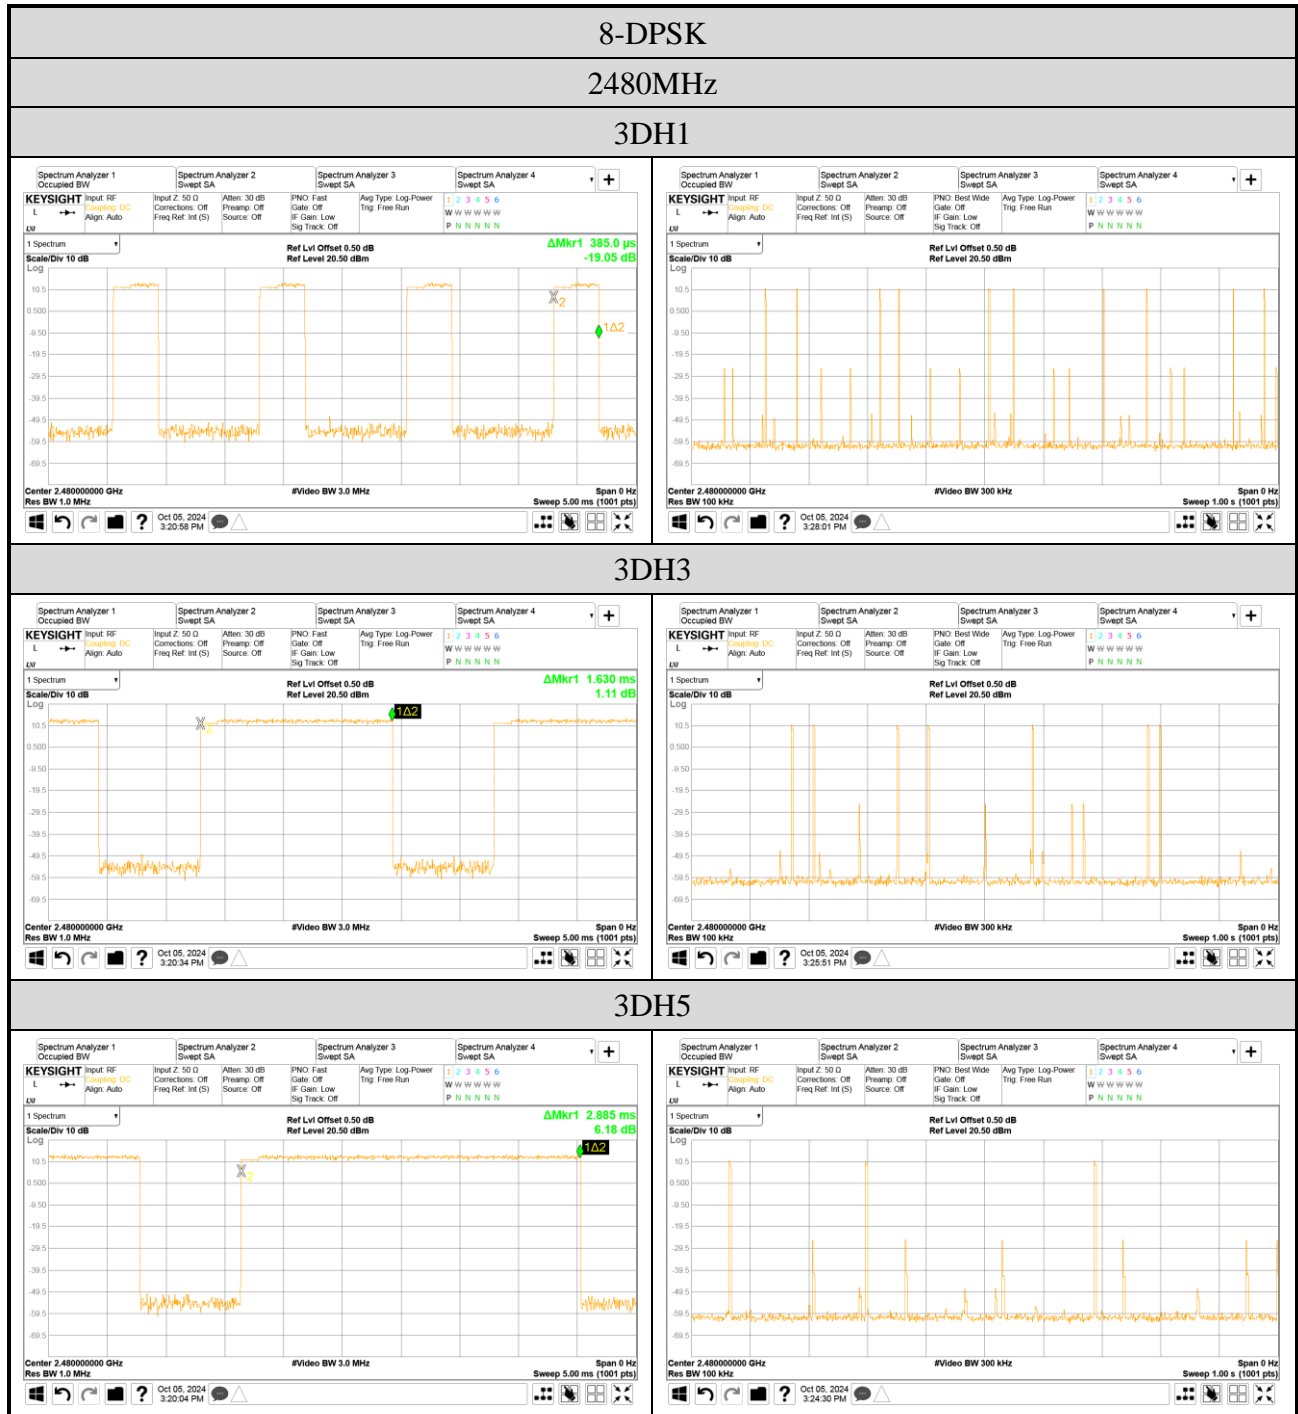



## A.6 NUMBER OF HOPPING CHANNELS

Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

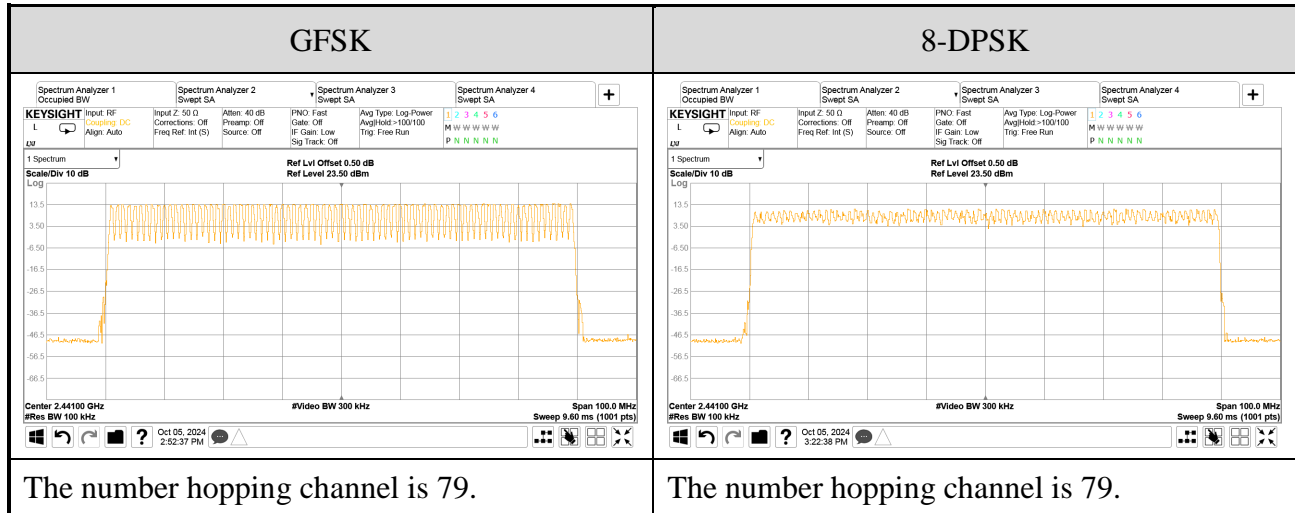

## A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.7.1 Maximum Peak Output Power

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	14.39	0.027	21dBm (0.125W)
	2441	14.36	0.027	
	2480	14.61	0.029	
8-DPSK	2402	14.43	0.028	
	2441	14.40	0.028	
	2480	14.63	0.029	


### A.7.2 Average Output Power (Reporting only)


Mode	Centre Frequency (MHz)	Average Output Power (dBm)	Duty cycle factor (dB) 10log (1/x)	Maximum Average Output Power		Limit
				(dBm)	(W)	
GFSK	2402	12.96	1.13	12.96	0.020	21dBm (0.125W)
	2441	13.12	1.13	13.12	0.021	
	2480	12.88	1.13	12.88	0.019	
8-DPSK	2402	10.83	1.129	11.96	0.016	
	2441	10.83	1.129	11.96	0.016	
	2480	10.55	1.129	11.68	0.015	

## A.8 EMISSION LIMITATIONS MEASUREMENT


Test Date	2024/10/05	Temp./Hum.	26°C/61%
Cable Loss	0.50 dB	Tested By	Ryan Chiang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.8.1 Band Edge

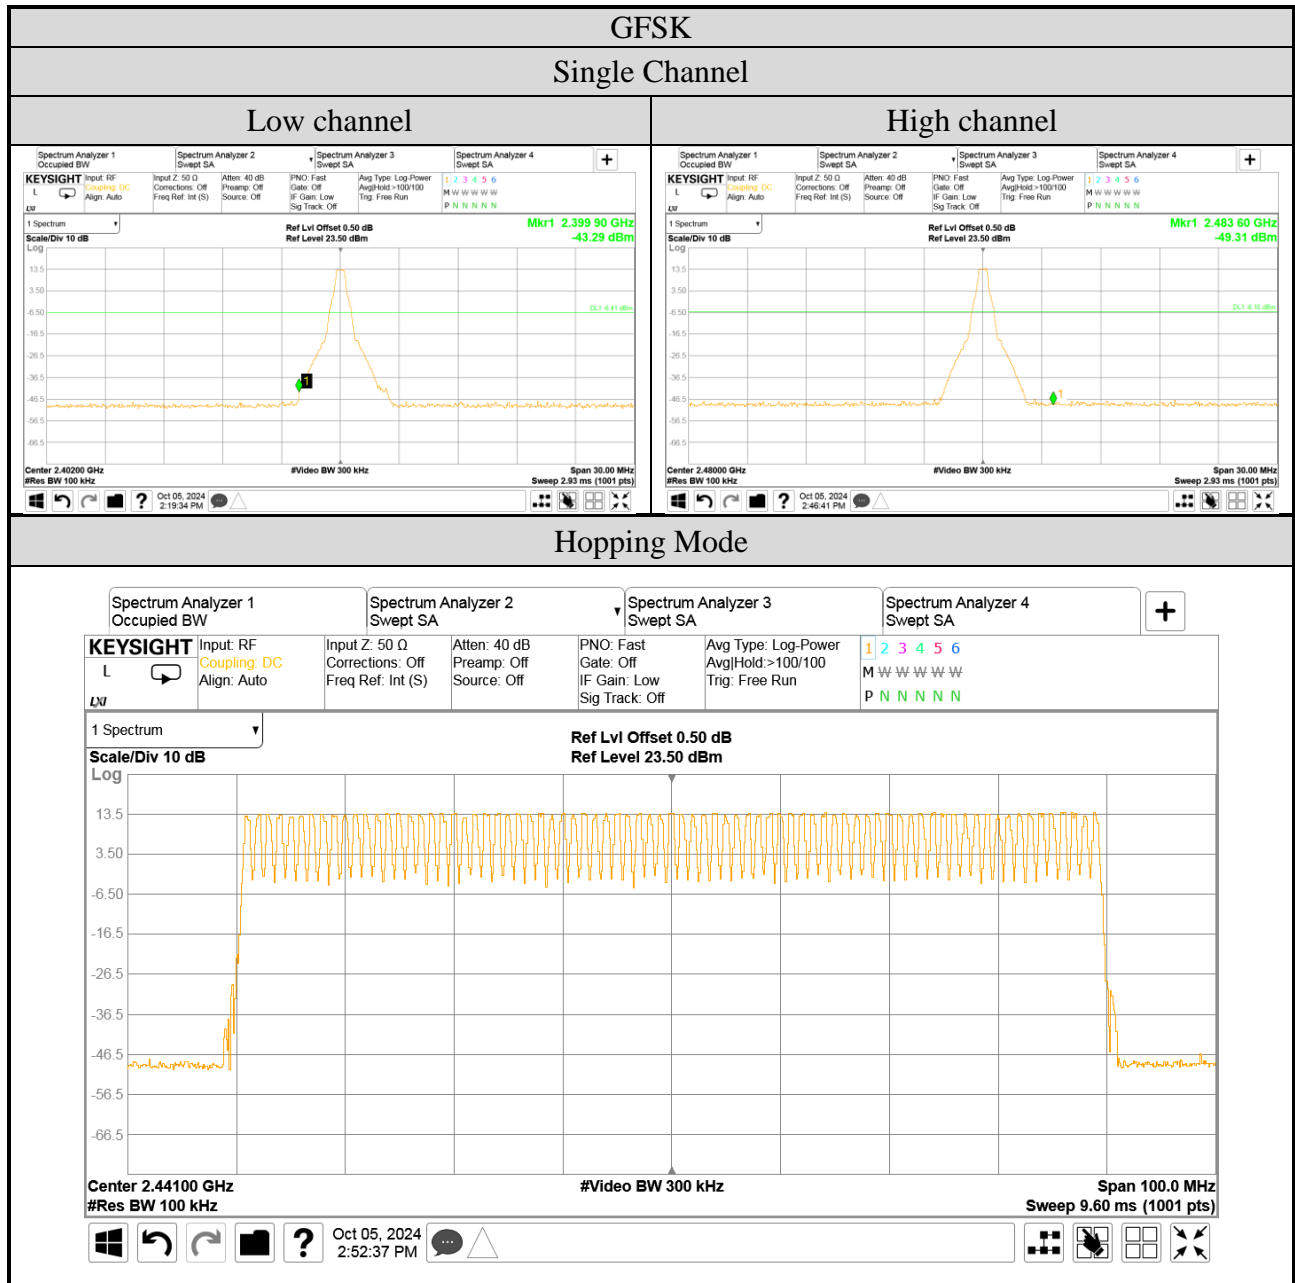


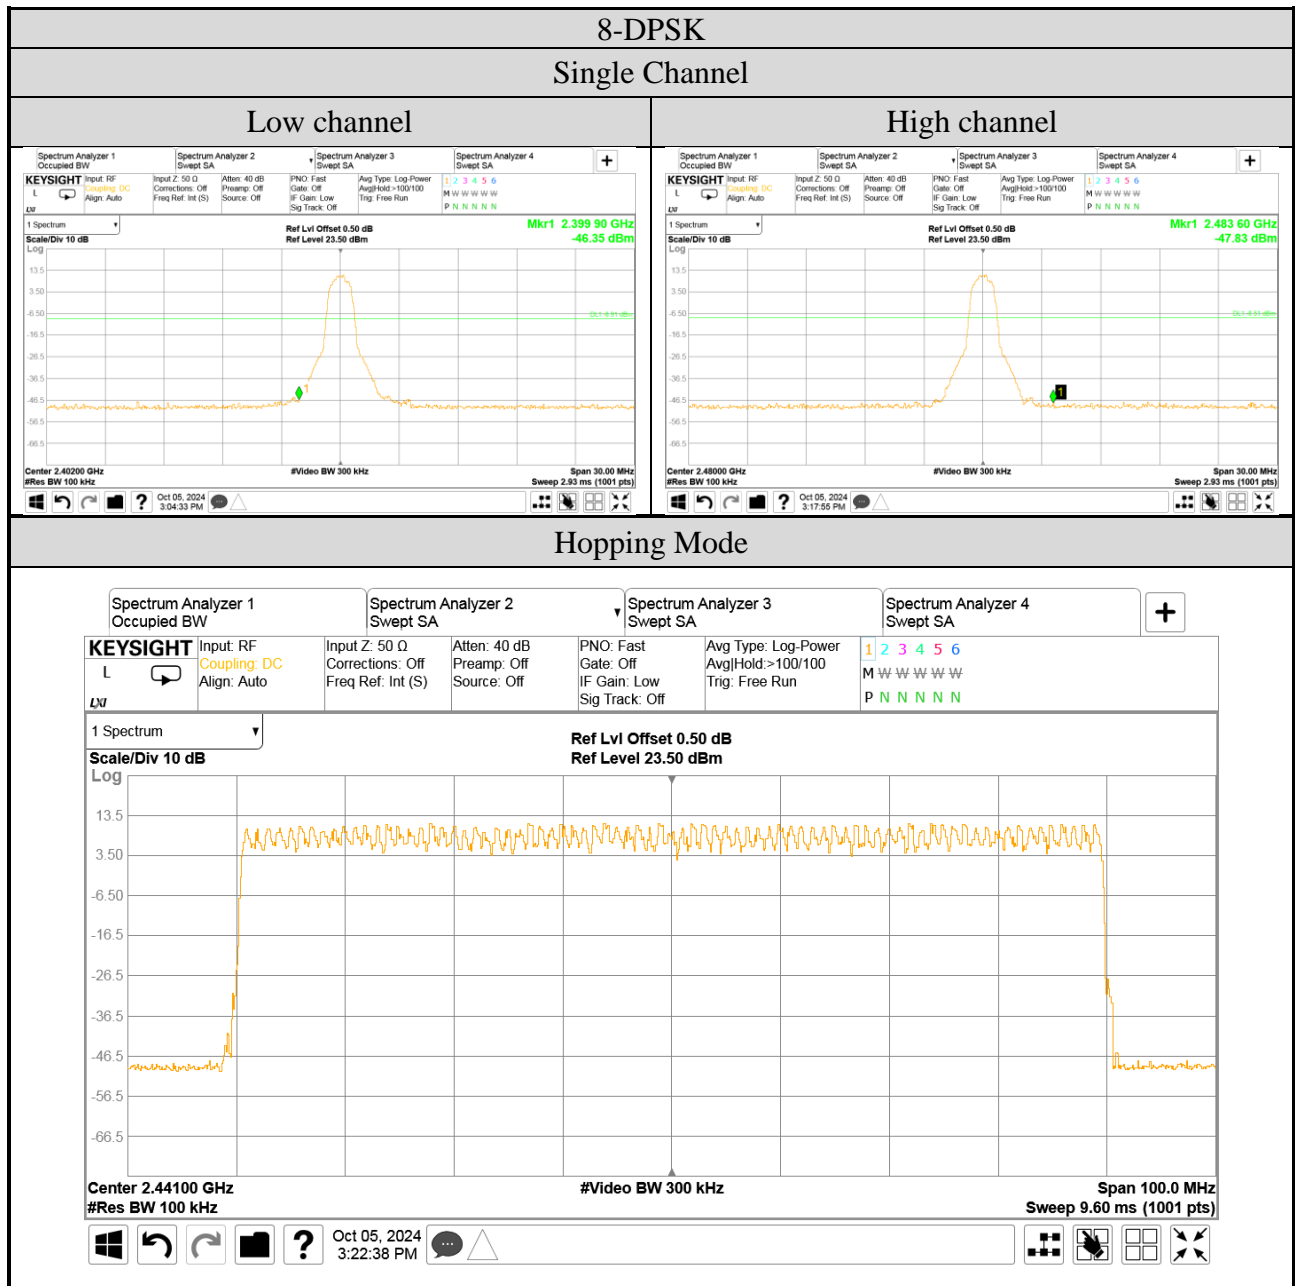

A.8.2 Spurious Emission

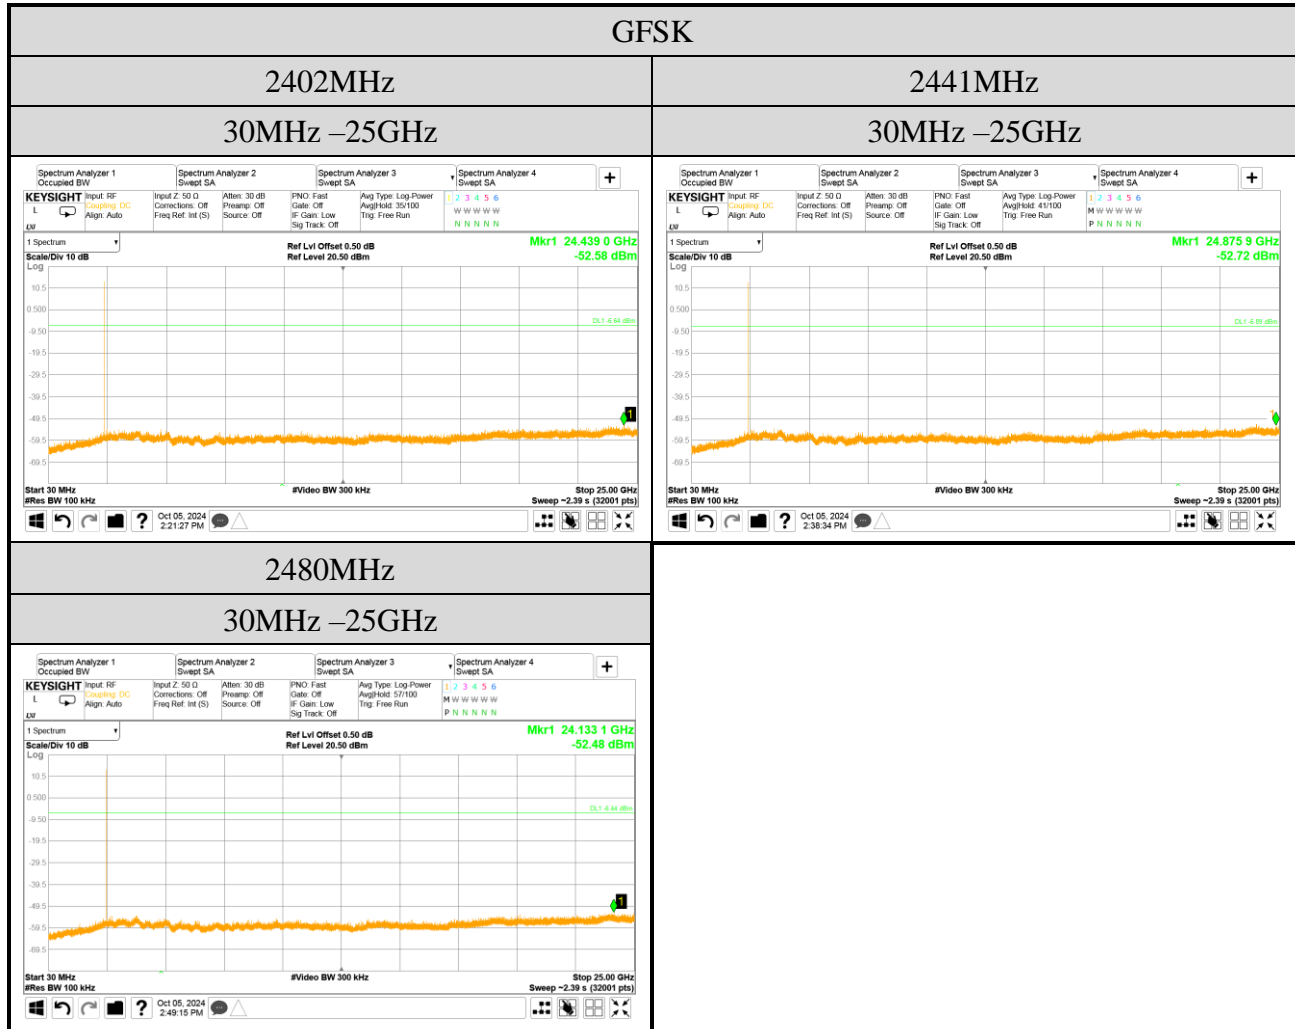

Note: All results have been included cable loss.

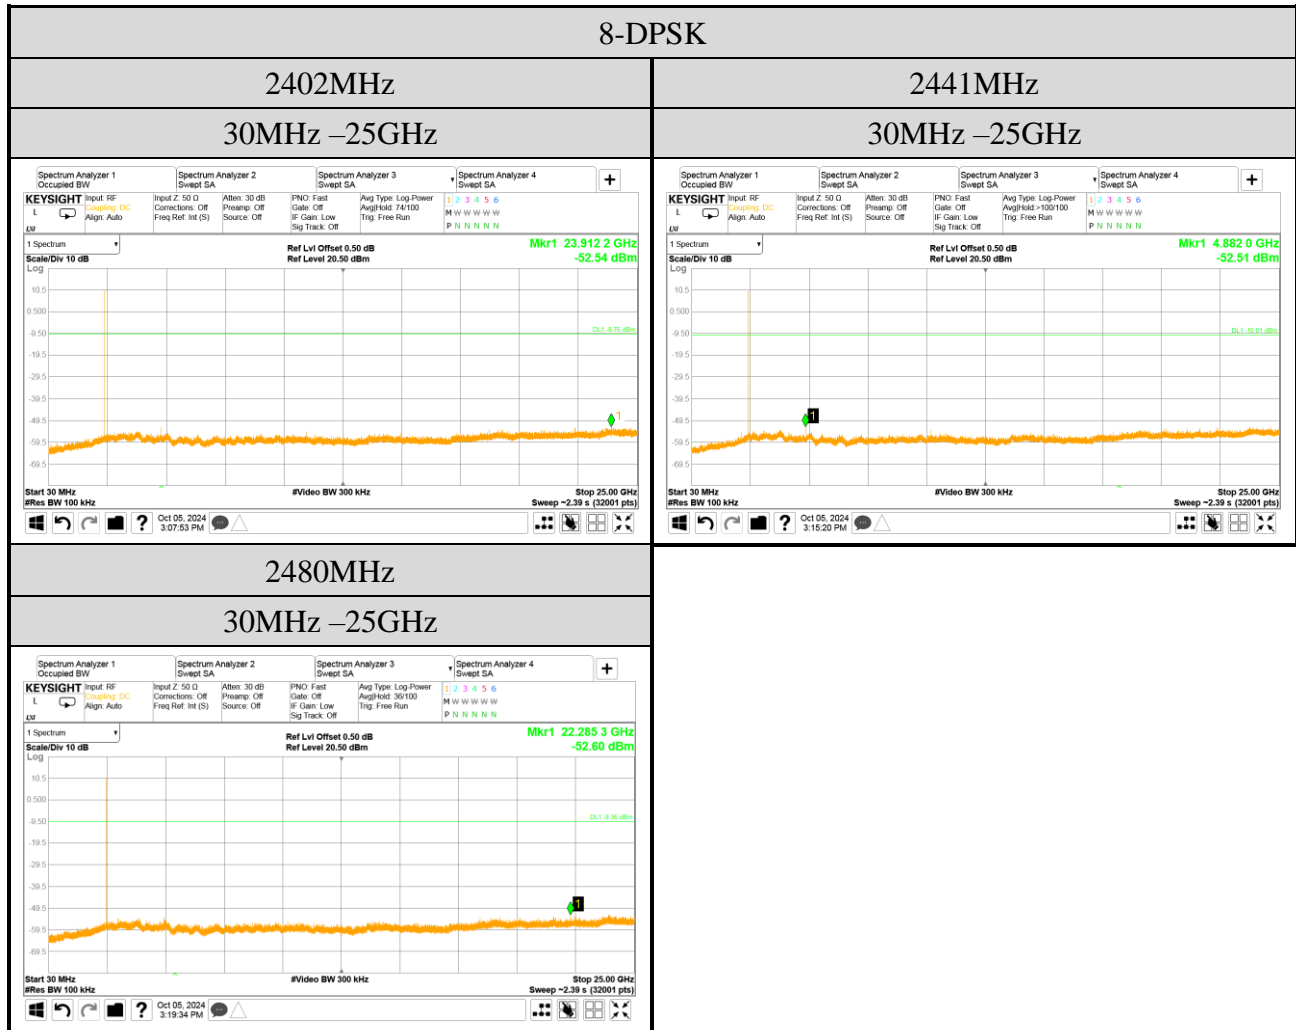

Note: All results have been included cable loss.



**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**APPENDIX B**

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

# APPENDIX B

## TEST PHOTOGRAPHS

(Model: 17Z90TP)