

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	104
A.2.3 Emissions in Non-restricted Frequency Bands:.....	109
A.3 DTS/OCCUPIED BANDWIDTH	110
A.3.1 DTS/Occupied Bandwidth Result.....	110
A.3.2 Measurement Plots	112
A.4 MAXIMUM PEAK OUTPUT POWER	120
A.4.1 Peak Output Power	120
A.4.2 Average Output Power (Reporting only).....	124
A.5 EMISSION LIMITATIONS	127
A.6 POWER SPECTRAL DENSITY	157
A.6.1 Power Spectral Density Result	157
A.6.2 Measurement Plots	160

A.1 CONDUCTED EMISSION

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

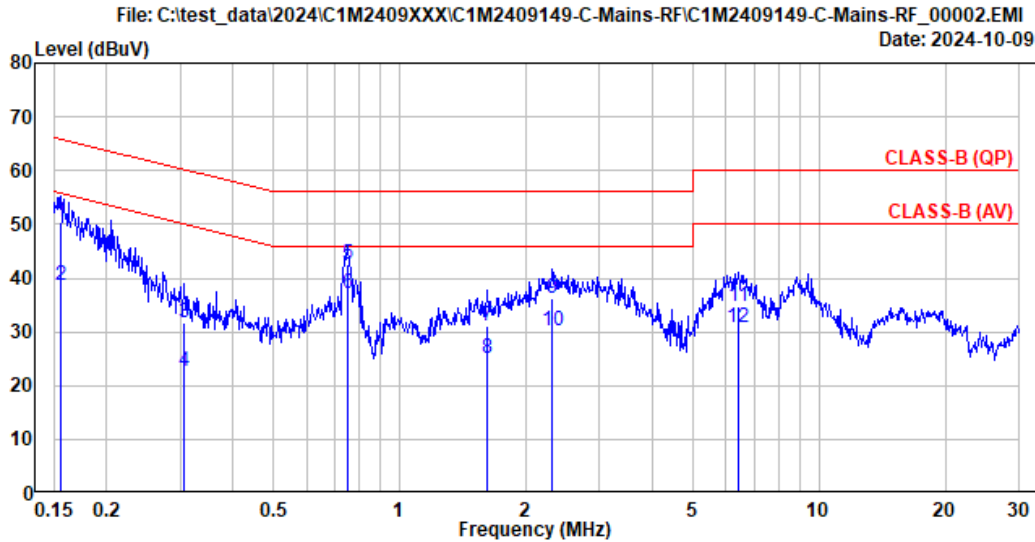


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	30.38	50.53	65.67	15.14	QP
2	0.156	10.27	0.03	9.85	18.58	38.73	55.67	16.94	Average
3	0.306	10.26	0.03	9.85	11.66	31.80	60.08	28.28	QP
4	0.306	10.26	0.03	9.85	2.58	22.72	50.08	27.36	Average
5	0.750	10.27	0.04	9.85	22.28	42.44	56.00	13.56	QP
6	0.750	10.27	0.04	9.85	16.93	37.09	46.00	8.91	Average
7	1.617	10.28	0.05	9.86	10.88	31.07	56.00	24.93	QP
8	1.617	10.28	0.05	9.86	4.95	25.14	46.00	20.86	Average
9	2.315	10.30	0.06	9.86	15.97	36.19	56.00	19.81	QP
10	2.315	10.30	0.06	9.86	9.96	30.18	46.00	15.82	Average
11	6.398	10.45	0.10	9.87	14.32	34.74	60.00	25.26	QP
12	6.398	10.45	0.10	9.87	10.24	30.66	50.00	19.34	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

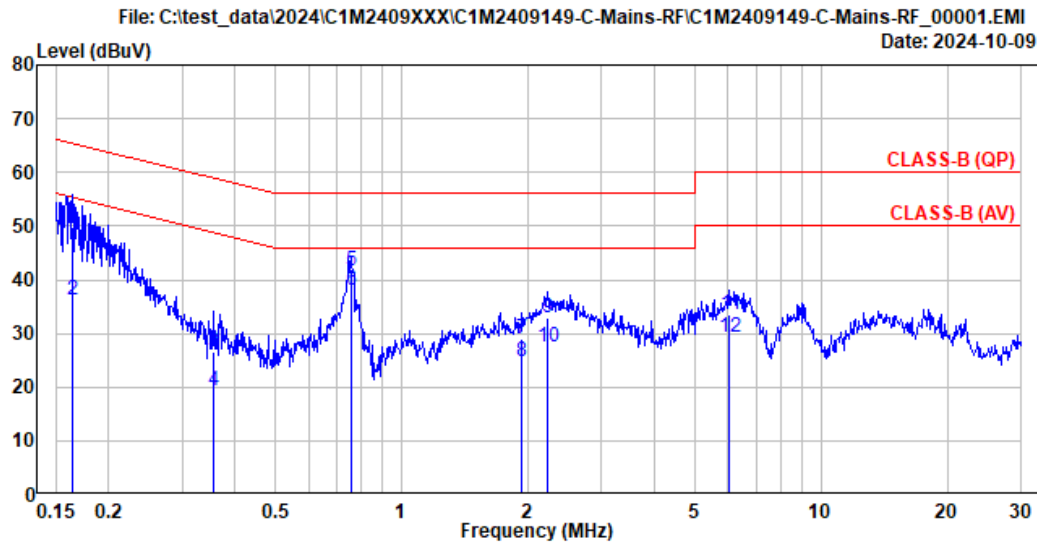

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.164	10.26	0.03	9.85	29.66	49.80	65.25	15.45	QP
2	0.164	10.26	0.03	9.85	16.08	36.22	55.25	19.03	Average
3	0.355	10.25	0.03	9.85	6.32	26.45	58.84	32.39	QP
4	0.355	10.25	0.03	9.85	-0.68	19.45	48.84	29.39	Average
5	0.758	10.26	0.04	9.85	21.58	41.73	56.00	14.27	QP
6	0.758	10.26	0.04	9.85	17.78	37.93	46.00	8.07	Average
7	1.934	10.27	0.06	9.86	8.79	28.98	56.00	27.02	QP
8	1.934	10.27	0.06	9.86	4.62	24.81	46.00	21.19	Average
9	2.235	10.28	0.06	9.86	12.71	32.91	56.00	23.09	QP
10	2.235	10.28	0.06	9.86	7.28	27.48	46.00	18.52	Average
11	6.057	10.37	0.10	9.87	13.05	33.39	60.00	26.61	QP
12	6.057	10.37	0.10	9.87	8.92	29.26	50.00	20.74	Average

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2024/09/24 ~ 10/15	Temp./Hum.	23 ~ 24°C/51 ~ 65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	23.14	1.39	26.50	34.15	32.18	40.00	7.82	Peak
74.500	12.16	2.19	26.39	42.96	30.91	40.00	9.09	Peak
227.000	16.58	3.82	25.77	37.65	32.28	46.00	13.72	Peak
250.500	17.87	4.04	25.73	35.62	31.79	46.00	14.21	Peak
345.500	19.84	5.13	26.08	33.91	32.81	46.00	13.19	Peak
767.000	24.87	7.65	27.38	32.87	38.01	46.00	7.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.500	22.91	1.40	26.50	39.76	37.57	40.00	2.43	Peak
57.500	12.36	1.90	26.46	45.96	33.76	40.00	6.24	Peak
91.000	14.91	2.38	26.34	47.24	38.19	43.50	5.31	Peak
345.500	19.84	5.13	26.08	38.09	36.98	46.00	9.02	Peak
416.000	21.40	5.94	26.65	32.75	33.44	46.00	12.56	Peak
445.500	21.93	6.20	26.86	33.70	34.97	46.00	11.03	Peak

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.39	26.50	33.88	32.12	40.00	7.88	Peak
91.500	15.02	2.39	26.34	40.29	31.36	43.50	12.14	Peak
224.000	16.41	3.79	25.78	39.14	33.55	46.00	12.45	Peak
345.500	19.84	5.13	26.08	36.28	35.17	46.00	10.83	Peak
540.000	23.34	6.71	27.33	30.64	33.36	46.00	12.64	Peak
775.500	24.90	7.69	27.37	33.95	39.17	46.00	6.83	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	23.14	1.39	26.50	39.59	37.62	40.00	2.38	Peak
91.500	15.02	2.39	26.34	46.74	37.81	43.50	5.69	Peak
225.000	16.47	3.80	25.78	40.80	35.29	46.00	10.71	Peak
345.500	19.84	5.13	26.08	38.07	36.96	46.00	9.04	Peak
448.000	21.97	6.22	26.88	28.96	30.27	46.00	15.73	Peak
594.000	24.00	6.80	27.47	32.65	35.99	46.00	10.01	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

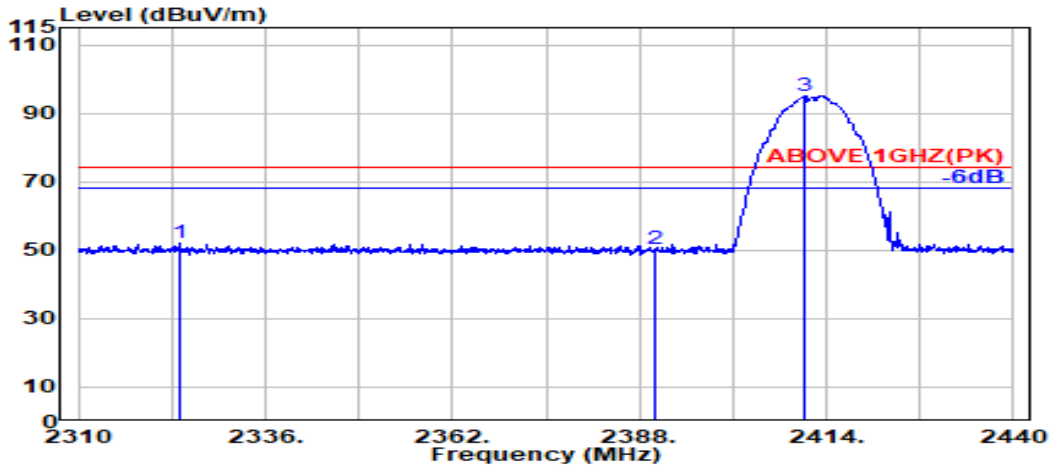

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.100	28.15	5.64	39.88	58.02	51.92	74.00	22.08	Peak
2390.000	28.14	5.72	39.88	56.35	50.34	74.00	23.66	Peak
@ 2411.000	28.14	5.75	39.88	101.17	95.19	---	---	Peak

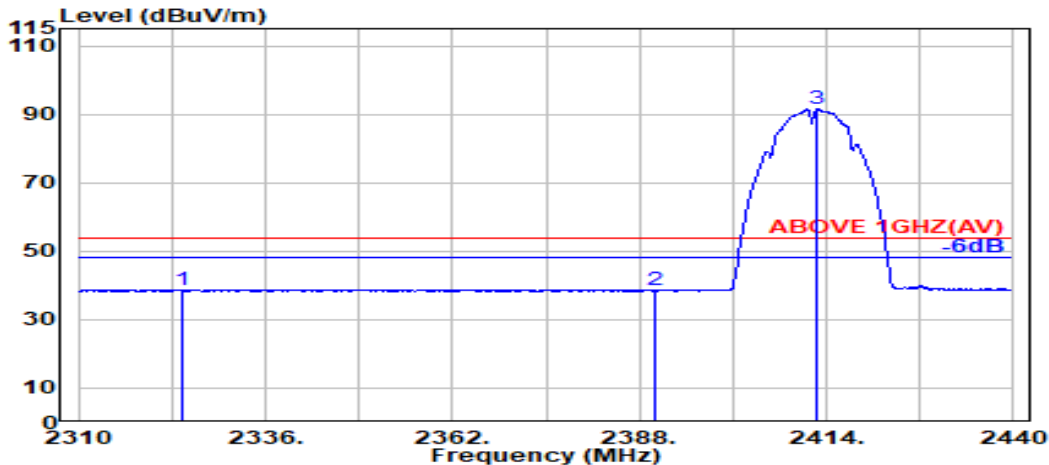


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.300	28.15	5.64	39.88	44.87	38.78	54.00	15.22	Average
2390.000	28.14	5.72	39.88	44.54	38.52	54.00	15.48	Average
@ 2412.800	28.15	5.75	39.88	97.43	91.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

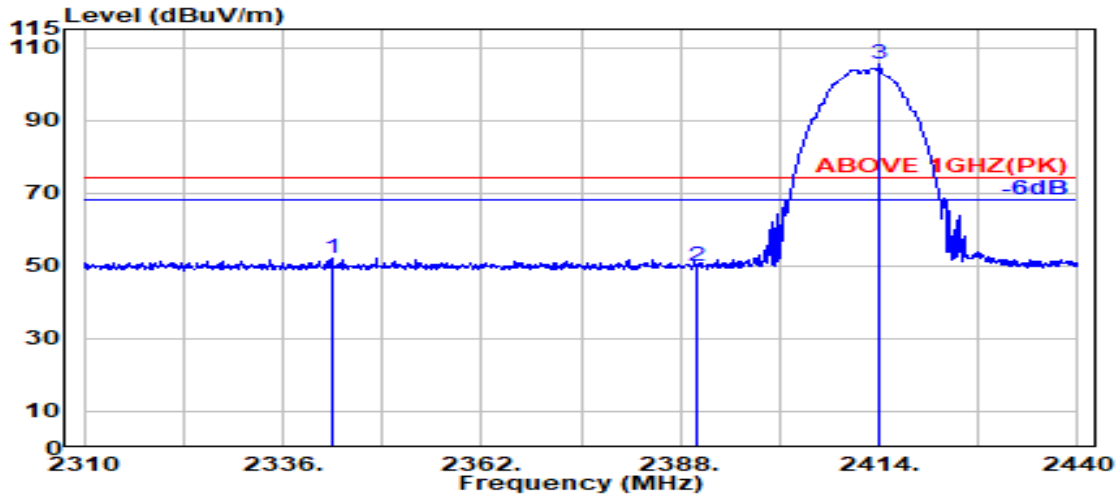

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.400	28.25	5.66	39.88	57.93	51.97	74.00	22.03	Peak
2390.000	28.14	5.72	39.88	55.77	49.75	74.00	24.25	Peak
@ 2414.100	28.16	5.75	39.88	111.24	105.28	---	---	Peak

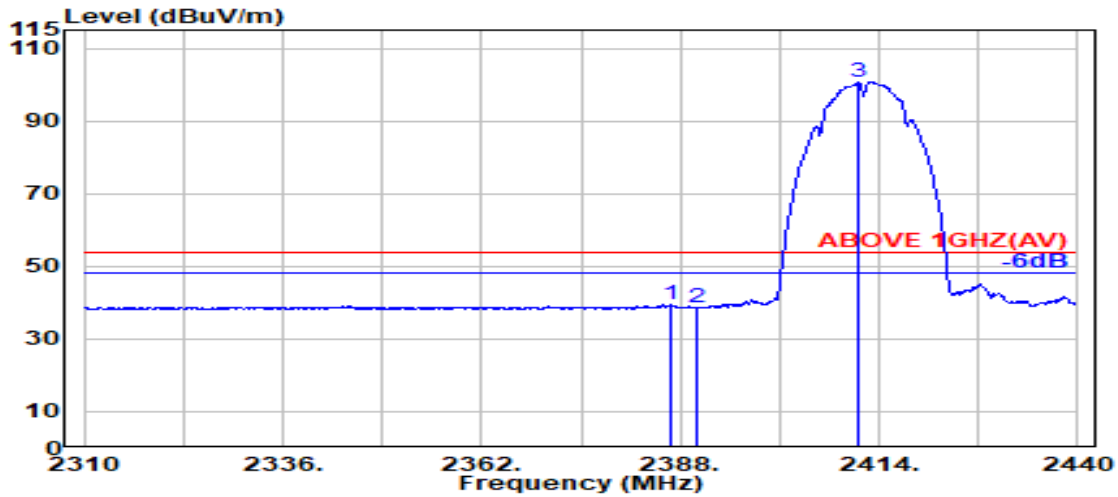


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.900	28.15	5.72	39.88	45.48	39.47	54.00	14.53	Average
2390.000	28.14	5.72	39.88	44.82	38.81	54.00	15.19	Average
@ 2411.300	28.15	5.75	39.88	106.74	100.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

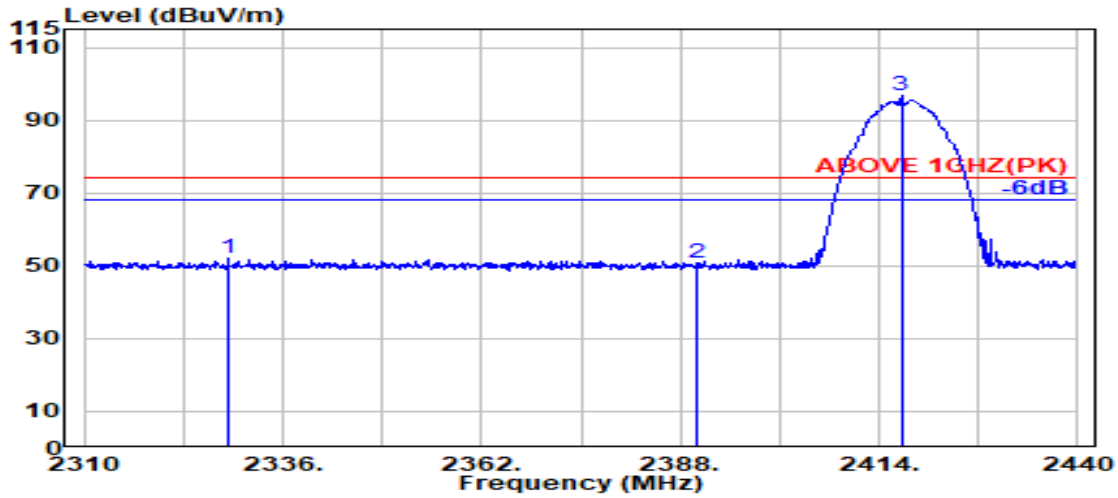

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.900	28.17	5.65	39.88	57.99	51.93	74.00	22.07	Peak
2390.000	28.14	5.72	39.88	56.97	50.96	74.00	23.04	Peak
@ 2416.900	28.17	5.75	39.88	102.68	96.73	---	---	Peak

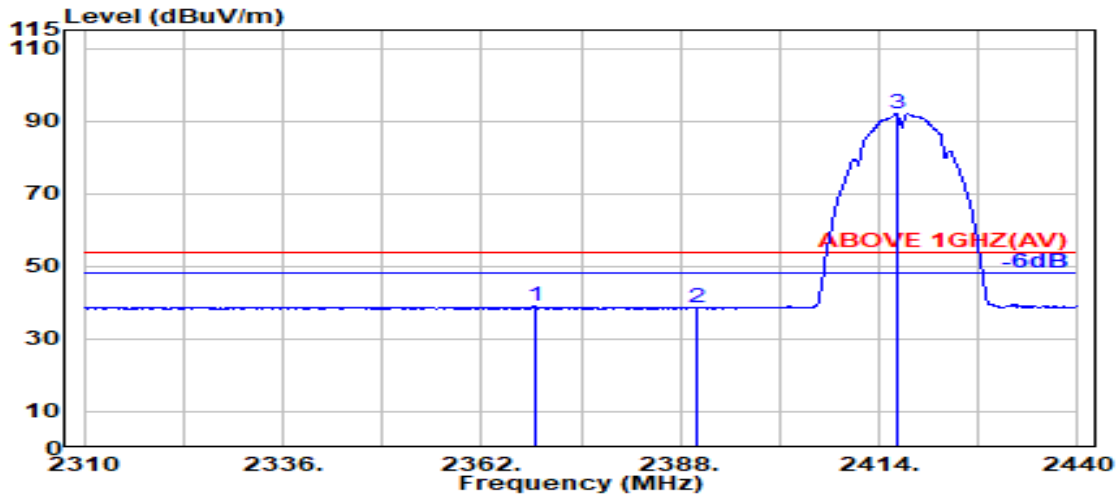


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2368.900	28.22	5.70	39.88	44.90	38.94	54.00	15.06	Average
2390.000	28.14	5.72	39.88	44.46	38.45	54.00	15.55	Average
@ 2416.300	28.17	5.75	39.88	97.90	91.94	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

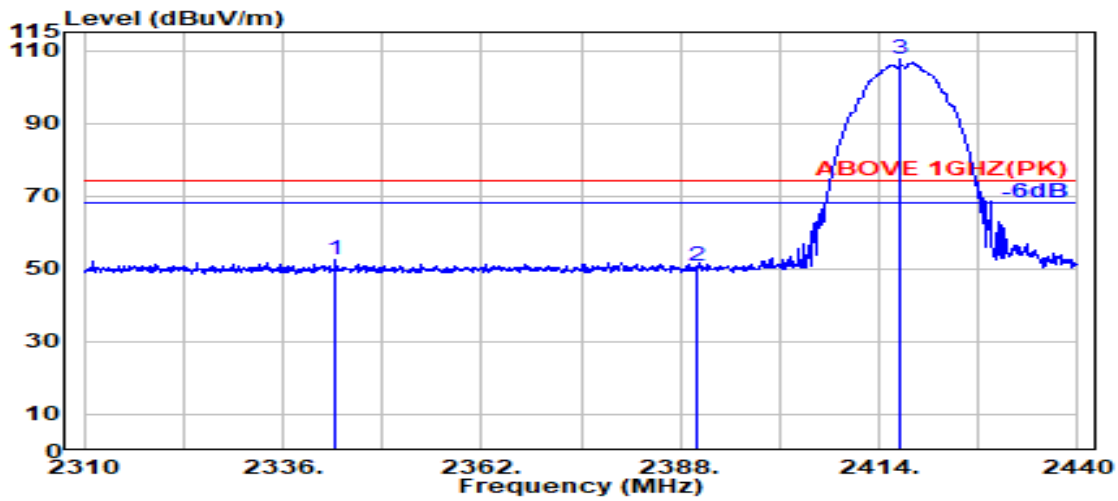

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.800	28.26	5.66	39.88	58.33	52.36	74.00	21.64	Peak
2390.000	28.14	5.72	39.88	56.67	50.65	74.00	23.35	Peak
@ 2416.700	28.17	5.75	39.88	113.62	107.66	---	---	Peak

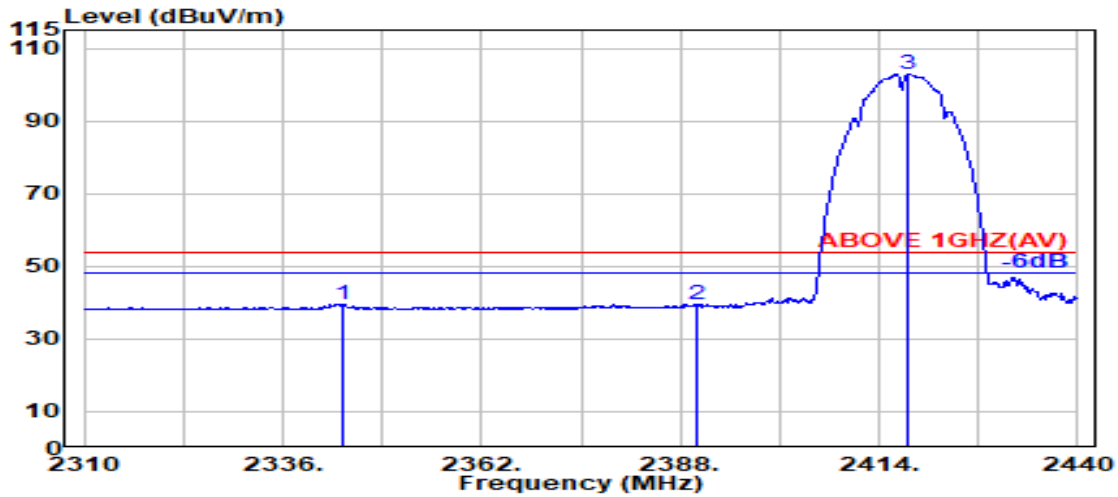


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2343.800	28.26	5.66	39.88	45.62	39.67	54.00	14.33	Average
2390.000	28.14	5.72	39.88	45.43	39.41	54.00	14.59	Average
@ 2417.800	28.17	5.75	39.88	108.91	102.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

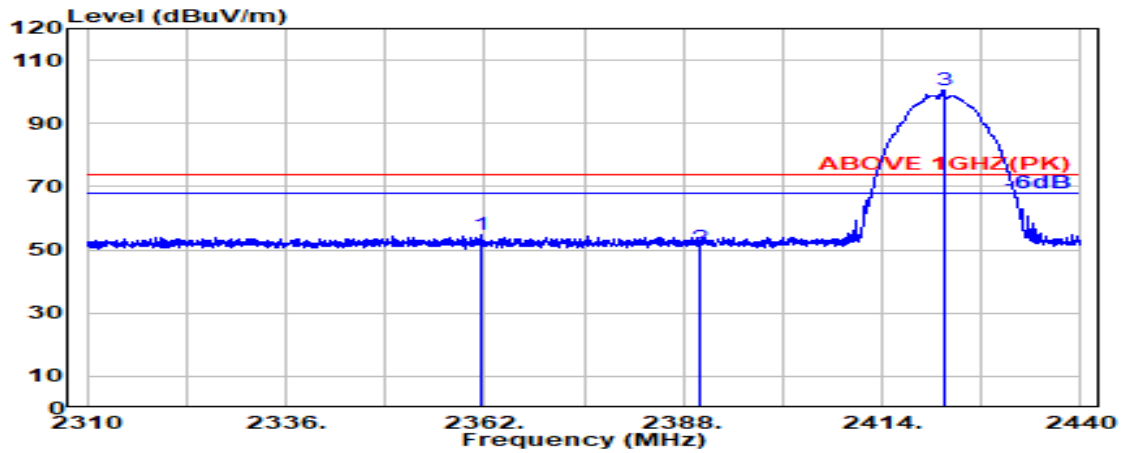

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.621	28.25	5.69	39.88	60.61	54.67	74.00	19.33	Peak
2390.000	28.14	5.72	39.88	56.89	50.88	74.00	23.12	Peak
@ 2422.017	28.19	5.76	39.88	106.28	100.35	---	---	Peak

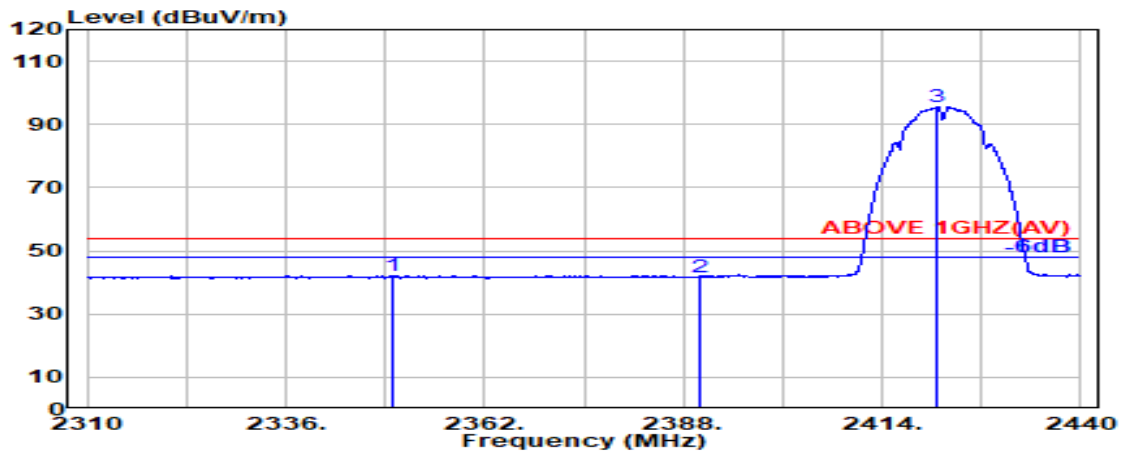


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.975	28.30	5.67	39.88	47.98	42.07	54.00	11.93	Average
2390.000	28.14	5.72	39.88	47.79	41.78	54.00	12.22	Average
@ 2421.258	28.19	5.76	39.88	101.68	95.74	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

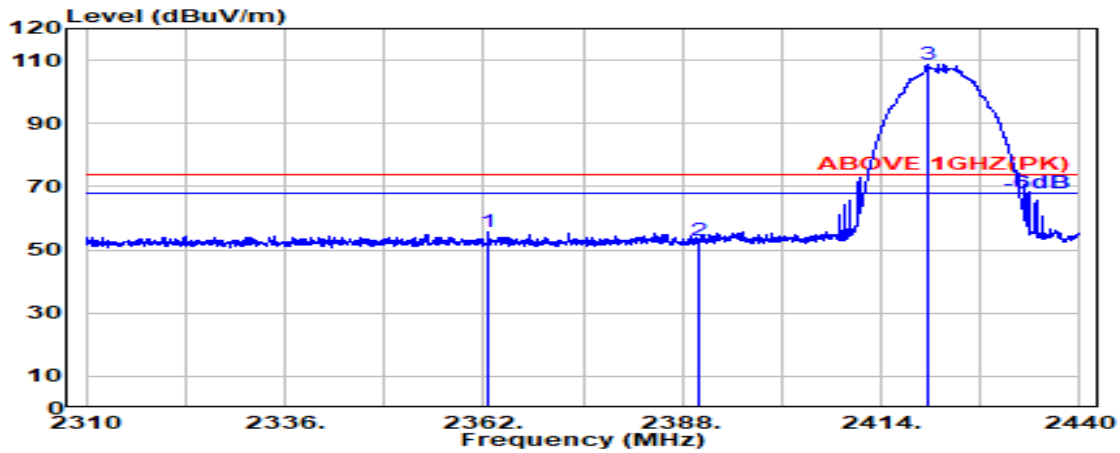

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2362.542	28.25	5.69	39.88	61.57	55.63	74.00	18.37	Peak
2390.000	28.14	5.72	39.88	58.85	52.83	74.00	21.17	Peak
@ 2420.012	28.18	5.76	39.88	114.83	108.89	---	---	Peak

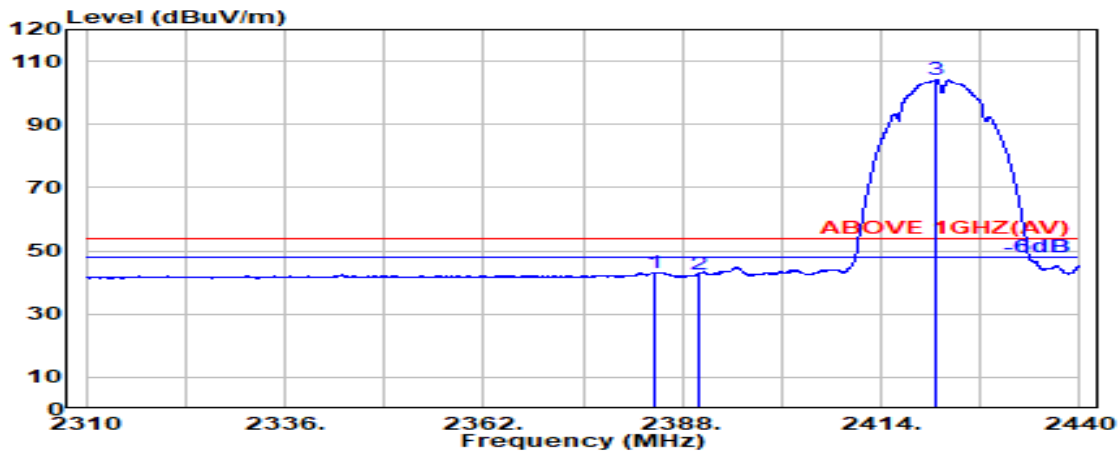


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.317	28.16	5.71	39.88	49.18	43.18	54.00	10.82	Average
2390.000	28.14	5.72	39.88	48.66	42.65	54.00	11.35	Average
@ 2421.204	28.19	5.76	39.88	110.22	104.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2427MHz
------	---------	-----------	------------

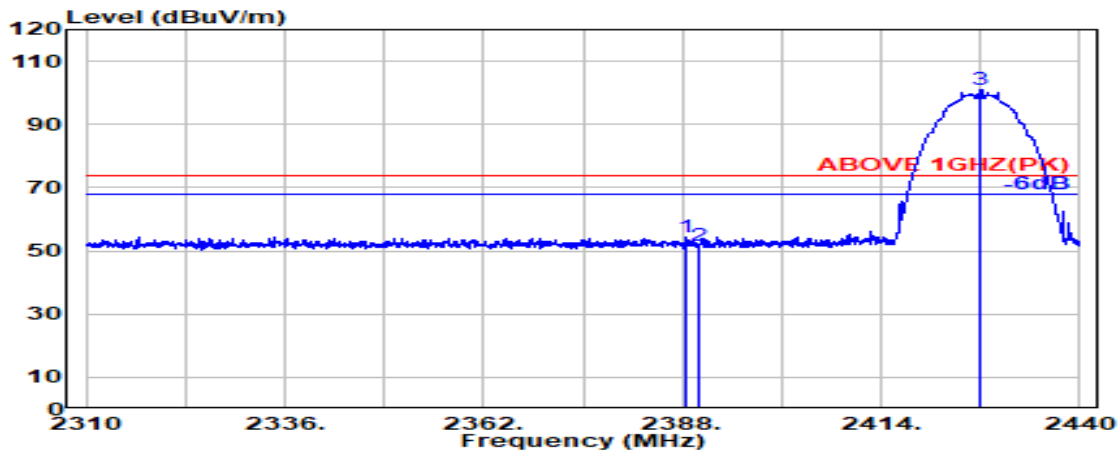

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.578	28.15	5.72	39.88	60.32	54.31	74.00	19.69	Peak
2390.000	28.14	5.72	39.88	57.60	51.58	74.00	22.42	Peak
@ 2426.783	28.21	5.76	39.88	106.82	100.91	---	---	Peak

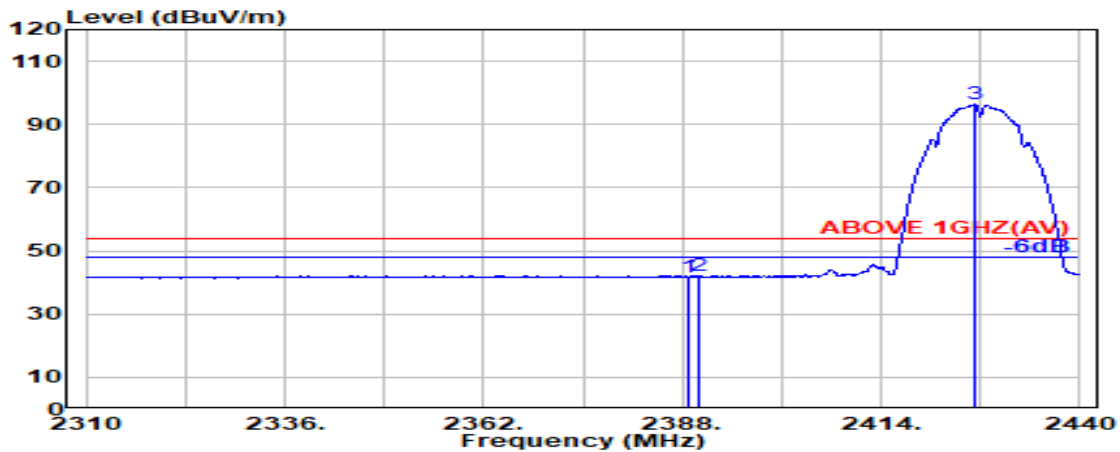


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.722	28.14	5.72	39.88	47.69	41.68	54.00	12.32	Average
2390.022	28.14	5.72	39.88	47.98	41.96	54.00	12.04	Average
@ 2426.206	28.21	5.76	39.88	102.30	96.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2427MHz
------	---------	-----------	------------

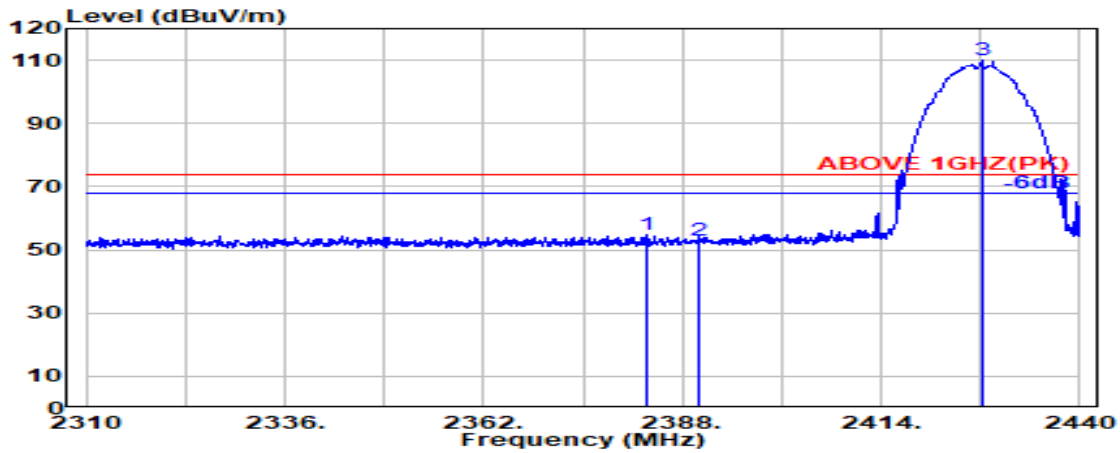

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.450	28.17	5.71	39.88	60.78	54.78	74.00	19.22	Peak
2390.000	28.14	5.72	39.88	58.99	52.97	74.00	21.03	Peak
@ 2427.145	28.21	5.77	39.88	115.74	109.84	---	---	Peak

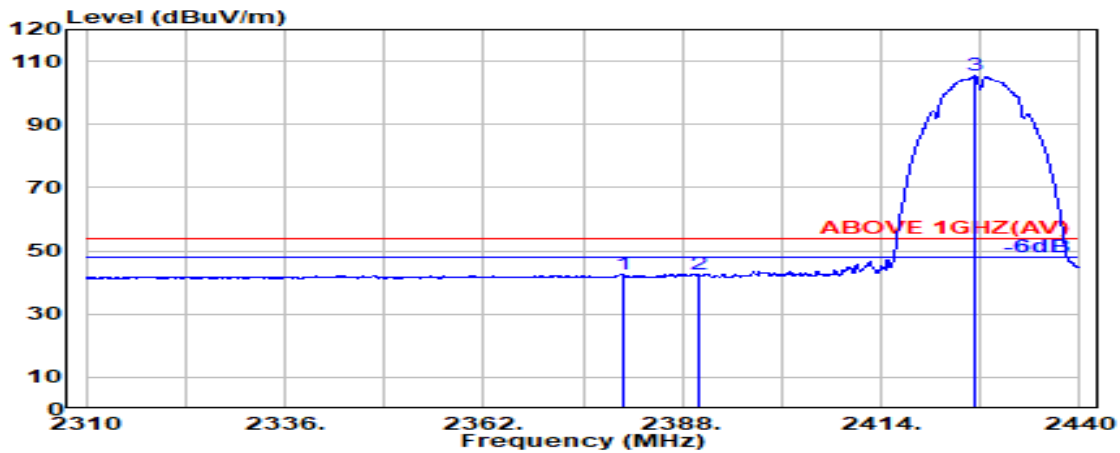


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.128	28.18	5.71	39.88	48.64	42.65	54.00	11.35	Average
2390.000	28.14	5.72	39.88	48.41	42.39	54.00	11.61	Average
@ 2426.206	28.21	5.76	39.88	111.21	105.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

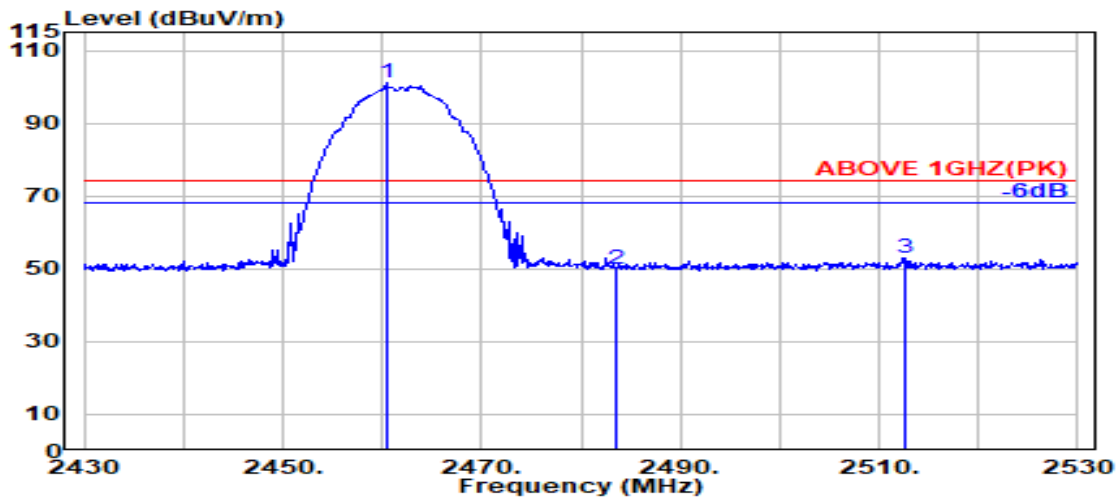

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.32	5.80	39.87	106.88	101.14	---	---	Peak
2483.500	28.37	5.83	39.87	55.74	50.07	74.00	23.93	Peak
2512.500	28.48	5.87	39.87	58.63	53.09	74.00	20.91	Peak

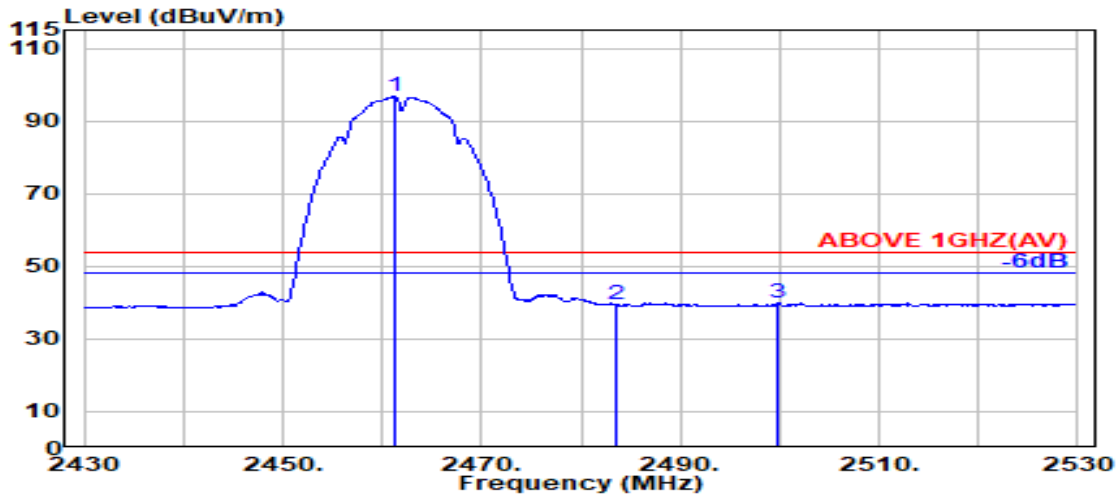


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.32	5.81	39.87	102.59	96.84	---	---	Average
2483.500	28.37	5.83	39.87	44.99	39.32	54.00	14.68	Average
2499.900	28.40	5.85	39.87	45.53	39.91	54.00	14.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

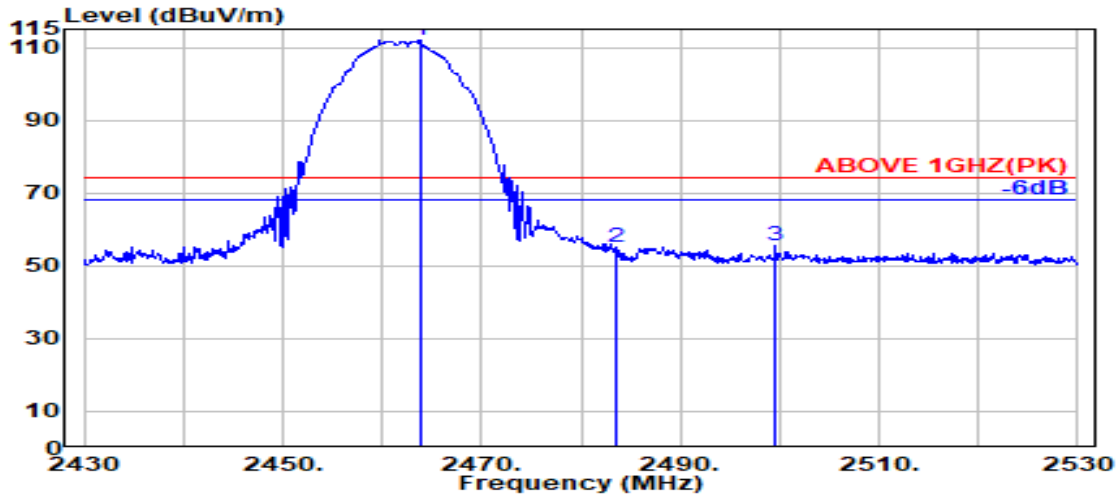

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.33	5.81	39.87	117.88	112.14	---	---	Peak
2483.500	28.37	5.83	39.87	60.71	55.03	74.00	18.97	Peak
2499.600	28.40	5.85	39.87	61.00	55.37	74.00	18.63	Peak

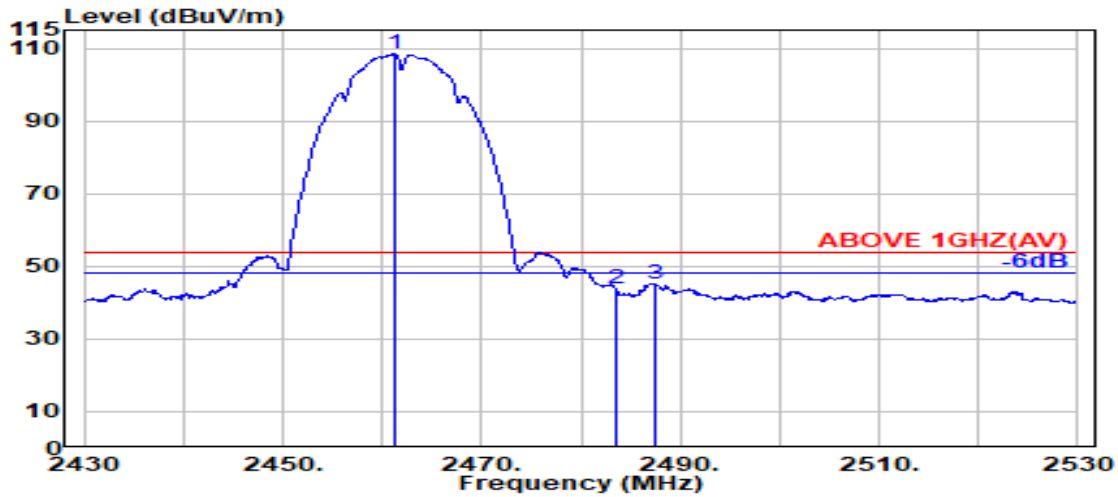


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.32	5.81	39.87	114.29	108.55	---	---	Average
2483.500	28.37	5.83	39.87	49.39	43.72	54.00	10.28	Average
2487.400	28.37	5.84	39.87	50.96	45.30	54.00	8.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

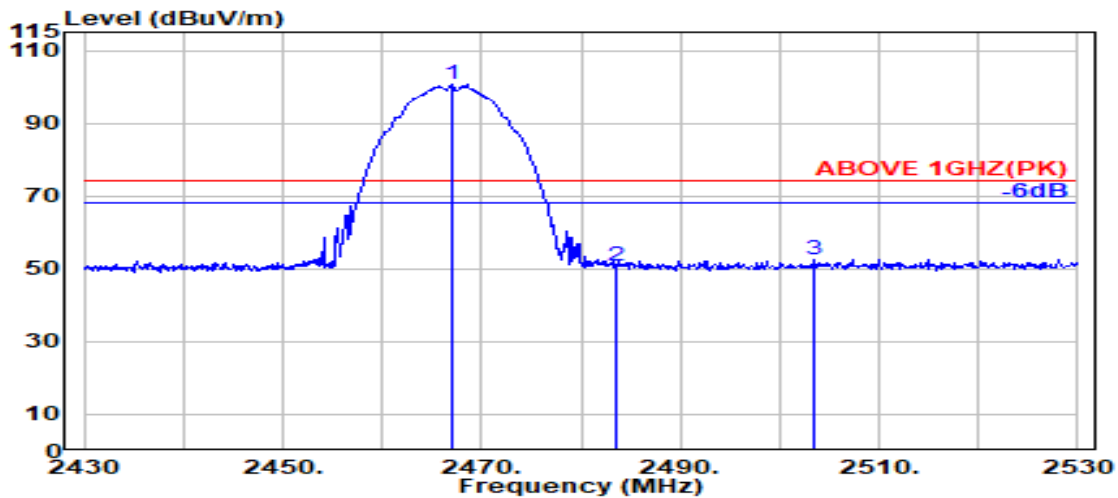

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.33	5.81	39.87	106.49	100.76	---	---	Peak
2483.500	28.37	5.83	39.87	56.36	50.68	74.00	23.32	Peak
2503.500	28.42	5.85	39.87	58.32	52.72	74.00	21.28	Peak

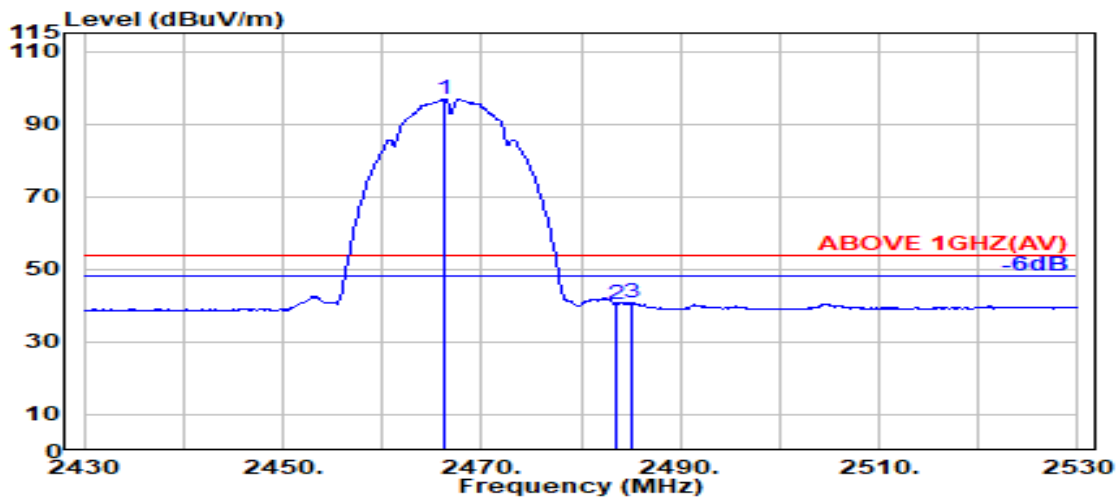


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.87	102.63	96.90	---	---	Average
2483.500	28.37	5.83	39.87	46.07	40.40	54.00	13.60	Average
2485.100	28.37	5.83	39.87	46.44	40.77	54.00	13.23	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

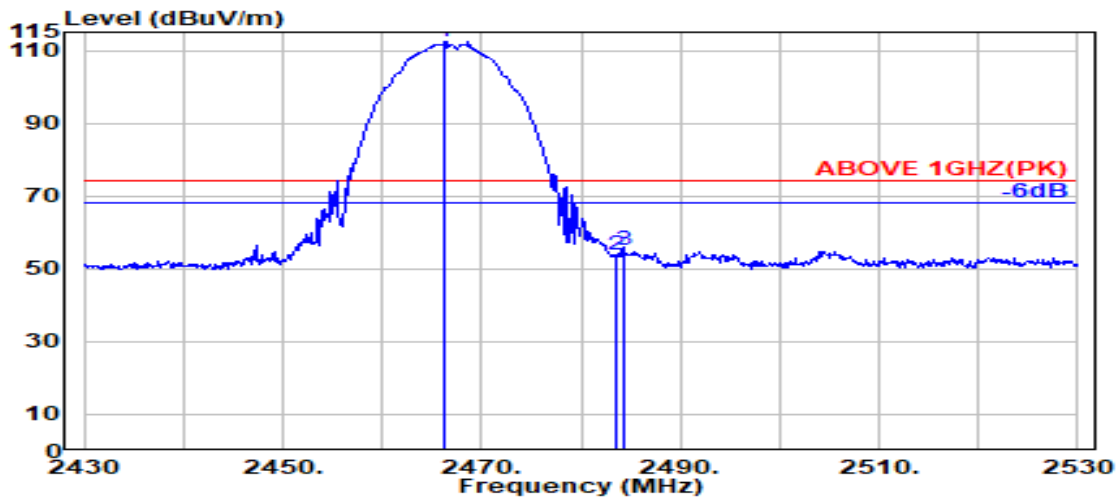

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.33	5.81	39.87	118.22	112.50	---	---	Peak
2483.500	28.37	5.83	39.87	59.36	53.69	74.00	20.31	Peak
2484.400	28.37	5.83	39.87	60.86	55.19	74.00	18.81	Peak

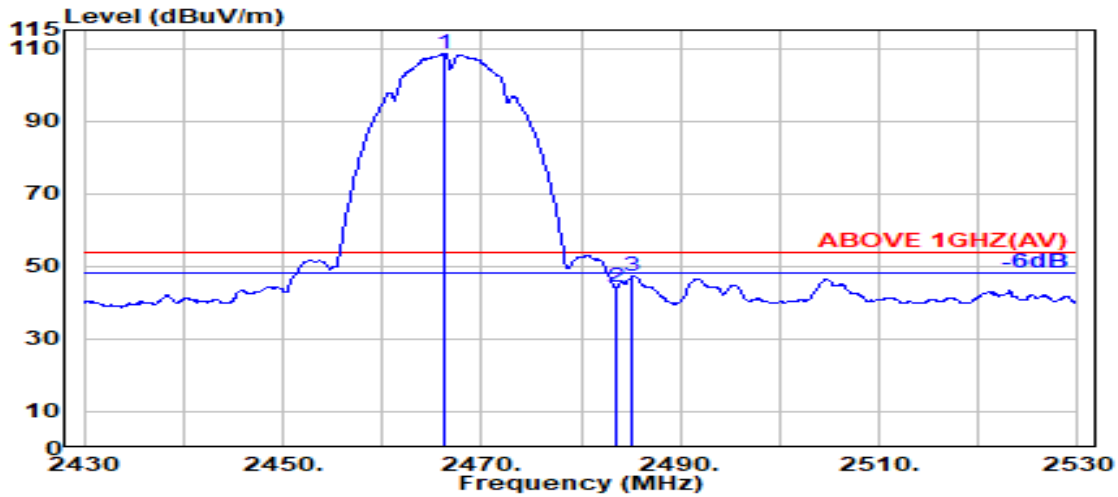


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.33	5.81	39.87	114.24	108.51	---	---	Average
2483.500	28.37	5.83	39.87	49.76	44.09	54.00	9.91	Average
2485.200	28.37	5.83	39.87	53.16	47.50	54.00	6.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

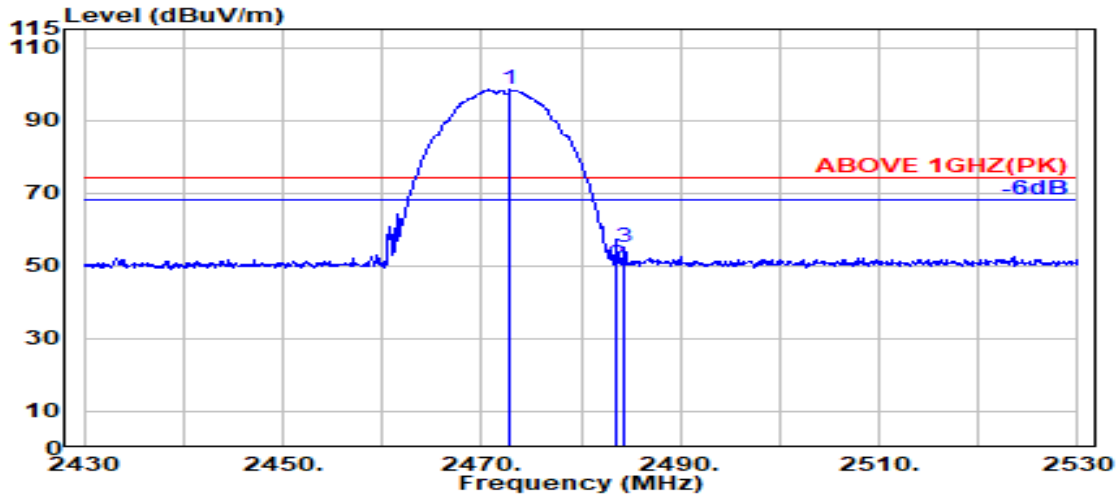

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	28.35	5.82	39.87	104.06	98.35	---	---	Peak
2483.500	28.37	5.83	39.87	55.91	50.23	74.00	23.77	Peak
2484.400	28.37	5.83	39.87	60.86	55.19	74.00	18.81	Peak

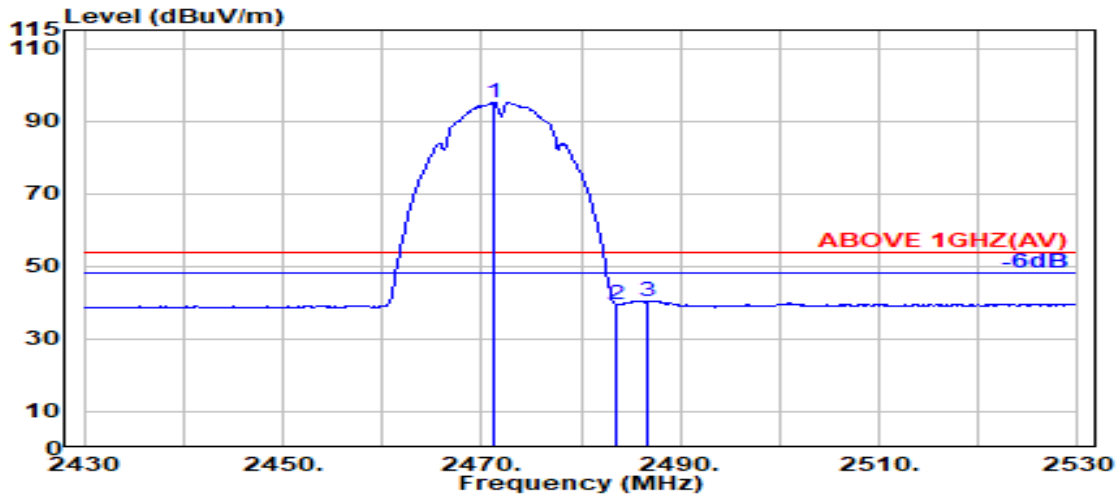


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.34	5.82	39.87	100.90	95.19	---	---	Average
2483.500	28.37	5.83	39.87	45.30	39.62	54.00	14.38	Average
2486.800	28.37	5.83	39.87	46.11	40.45	54.00	13.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

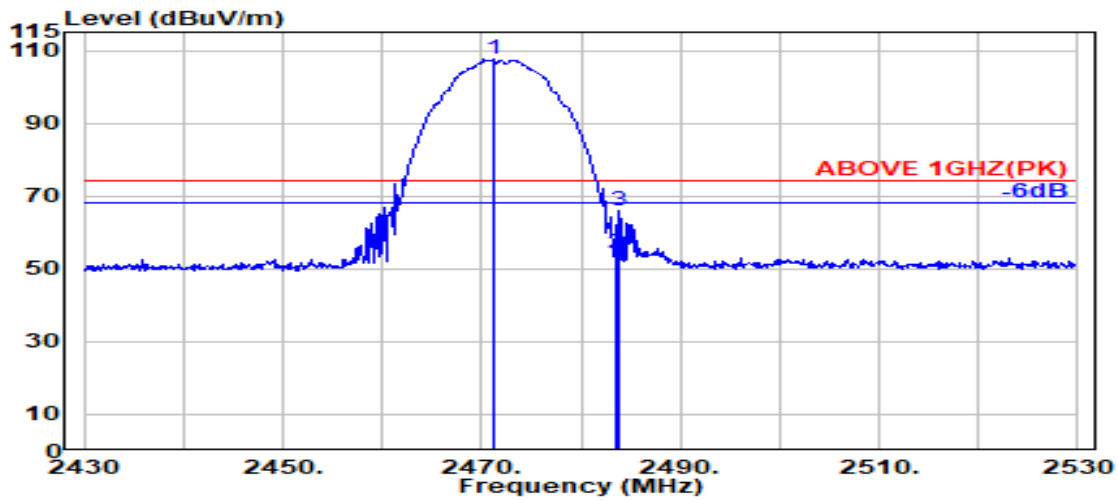

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.34	5.82	39.87	113.44	107.73	---	---	Peak
2483.500	28.37	5.83	39.87	60.10	54.43	74.00	19.57	Peak
2483.800	28.37	5.83	39.87	71.45	65.78	74.00	8.22	Peak

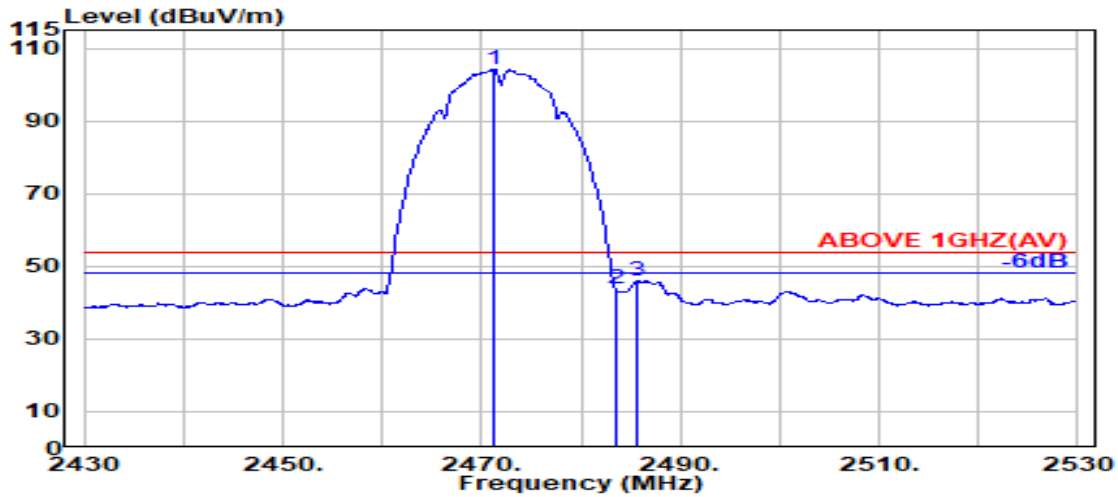


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.34	5.82	39.87	109.94	104.23	---	---	Average
2483.500	28.37	5.83	39.87	49.31	43.64	54.00	10.36	Average
2485.700	28.37	5.83	39.87	51.65	45.98	54.00	8.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

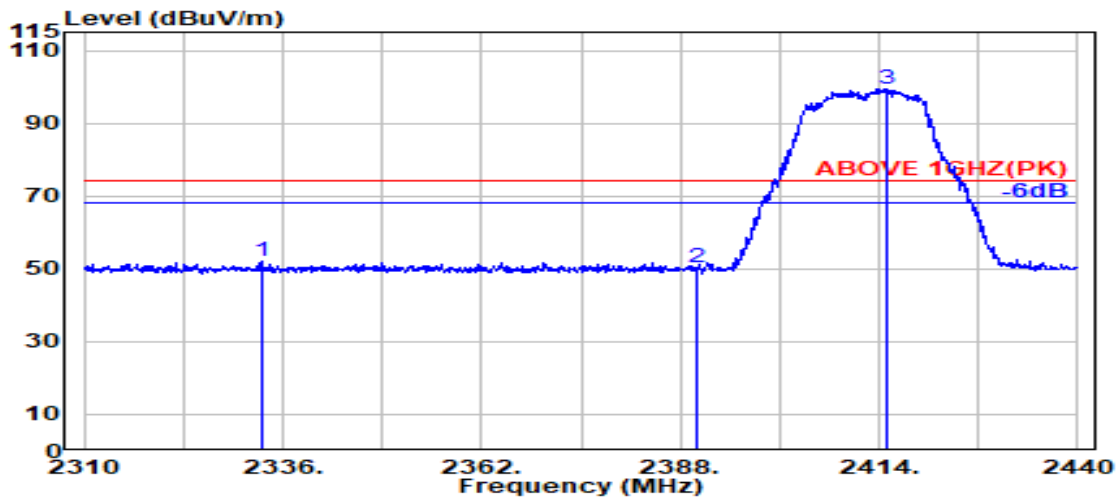

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.400	28.20	5.65	39.88	57.90	51.87	74.00	22.13	Peak
2390.000	28.14	5.72	39.88	56.21	50.19	74.00	23.81	Peak
@ 2414.900	28.16	5.75	39.88	105.38	99.42	---	---	Peak

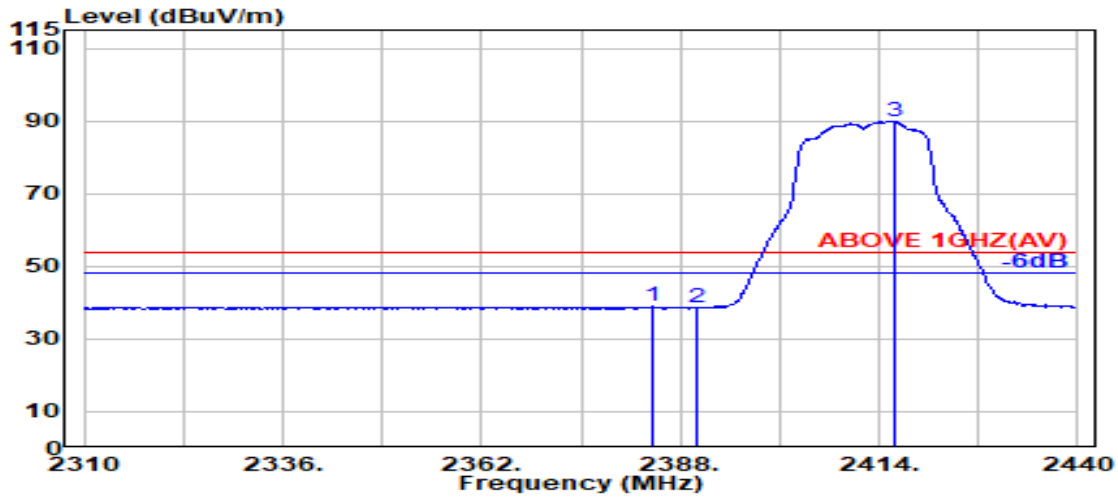


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.300	28.16	5.71	39.88	44.85	38.85	54.00	15.15	Average
2390.000	28.14	5.72	39.88	44.61	38.59	54.00	15.41	Average
@ 2416.000	28.16	5.75	39.88	95.83	89.87	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

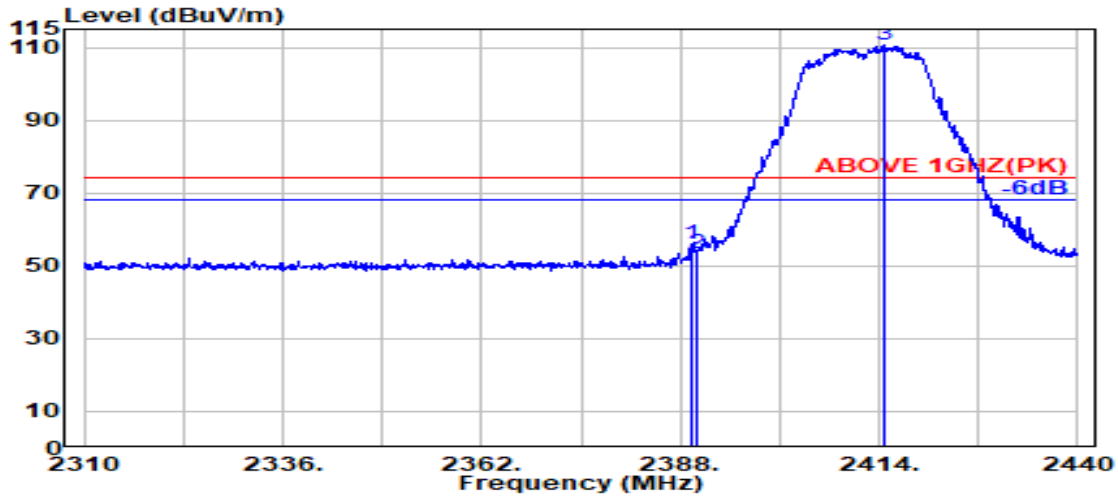

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	61.84	55.83	74.00	18.17	Peak
2390.000	28.14	5.72	39.88	59.38	53.36	74.00	20.64	Peak
@ 2414.600	28.16	5.75	39.88	116.66	110.69	---	---	Peak

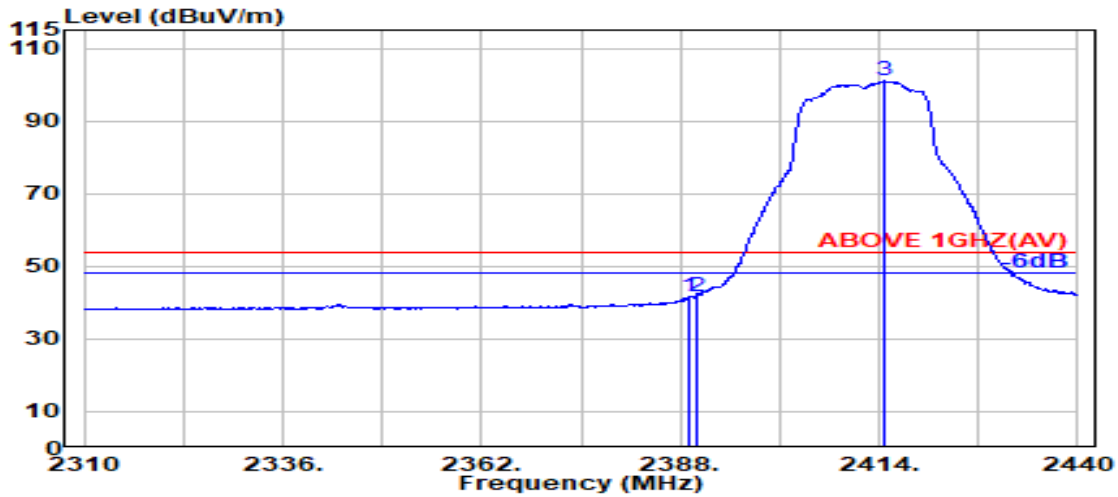


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	47.71	41.69	54.00	12.31	Average
2390.000	28.14	5.72	39.88	47.84	41.82	54.00	12.18	Average
@ 2414.700	28.16	5.75	39.88	106.89	100.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

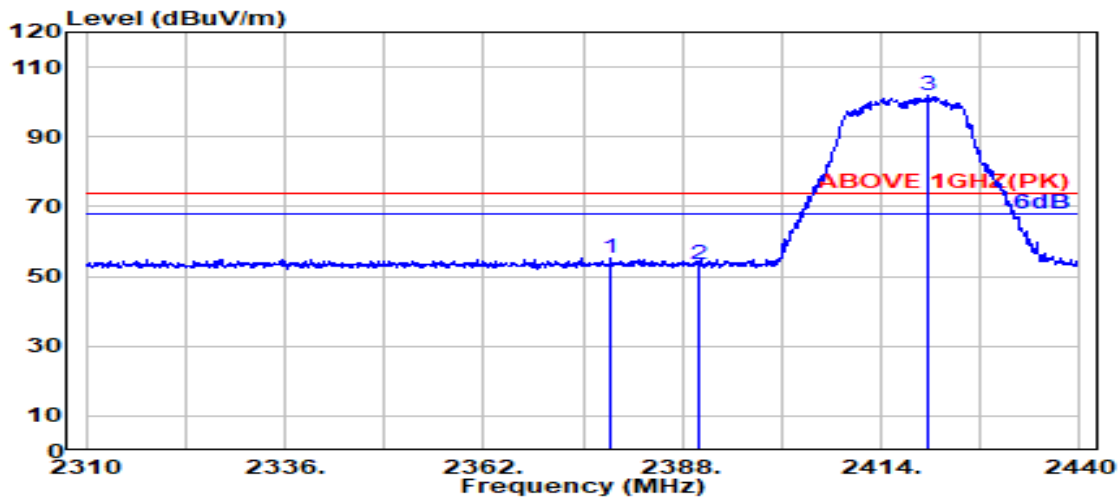

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.700	28.18	5.71	39.88	61.25	55.26	74.00	18.74	Peak
2390.000	28.14	5.72	39.88	59.43	53.41	74.00	20.59	Peak
@ 2420.200	28.18	5.76	39.88	107.63	101.69	---	---	Peak

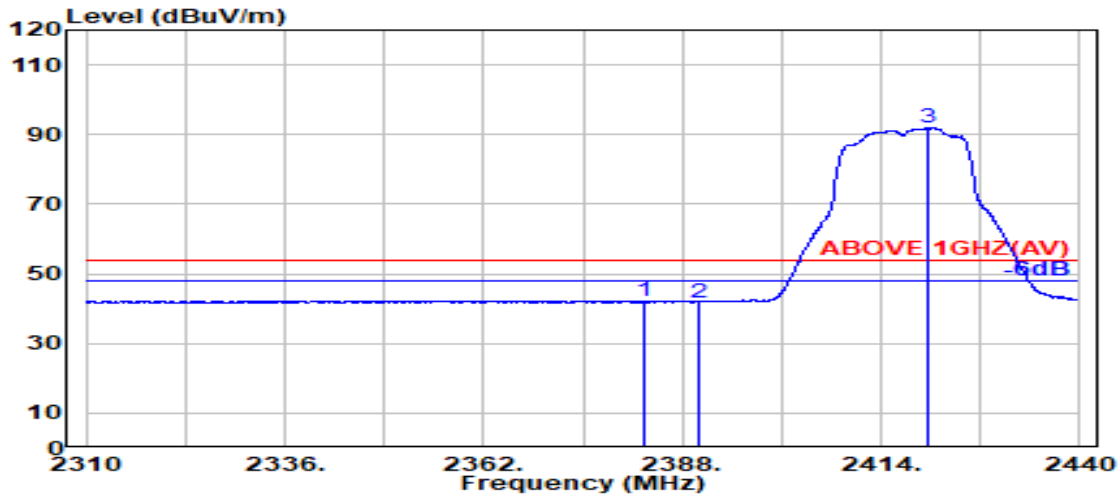


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.100	28.17	5.71	39.88	48.28	42.28	54.00	11.72	Average
2390.000	28.14	5.72	39.88	47.89	41.87	54.00	12.13	Average
@ 2420.100	28.18	5.76	39.88	97.94	92.00	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

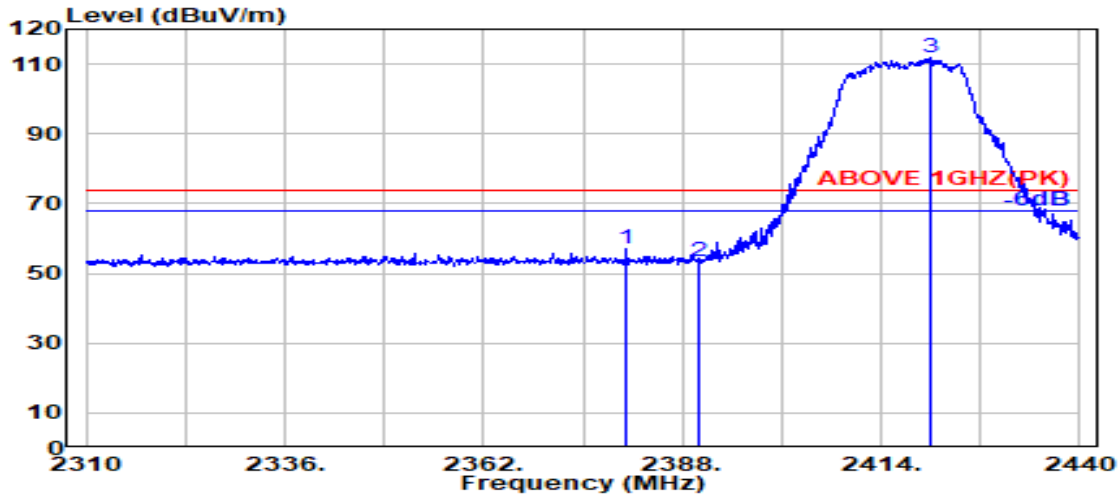

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.600	28.18	5.71	39.88	63.07	57.08	74.00	16.92	Peak
2390.000	28.14	5.72	39.88	59.57	53.56	74.00	20.44	Peak
@ 2420.400	28.18	5.76	39.88	117.66	111.73	---	---	Peak

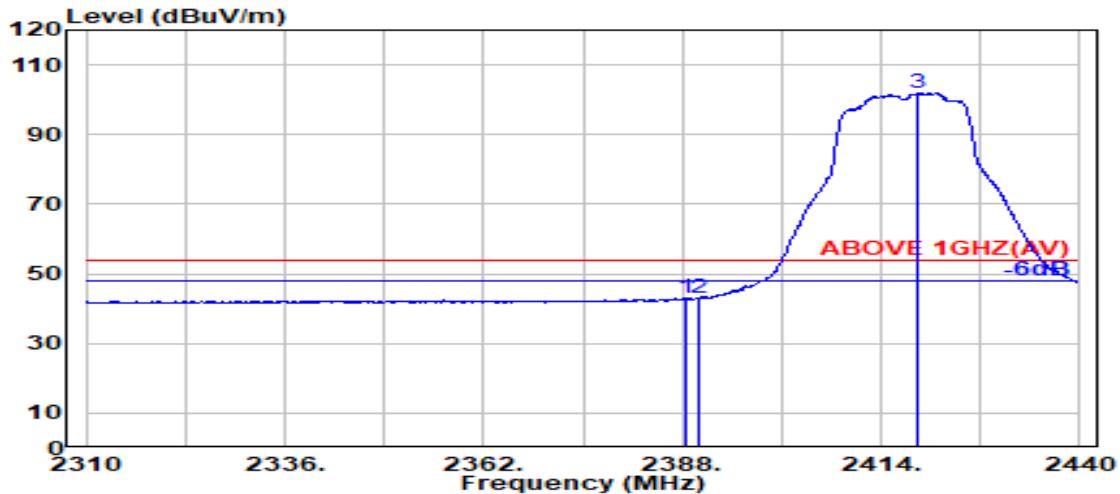


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	49.07	43.06	54.00	10.94	Average
2390.000	28.14	5.72	39.88	48.83	42.81	54.00	11.19	Average
@ 2418.800	28.18	5.76	39.88	107.85	101.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

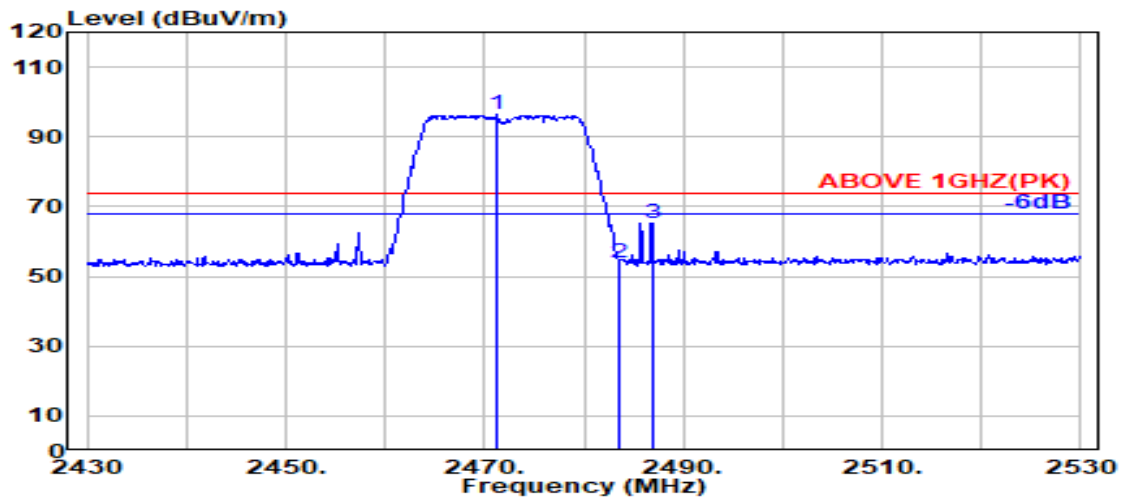

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.34	5.82	39.87	102.06	96.35	---	---	Peak
2483.500	28.37	5.83	39.87	59.77	54.10	74.00	19.90	Peak
2486.900	28.37	5.83	39.87	70.89	65.22	74.00	8.78	Peak

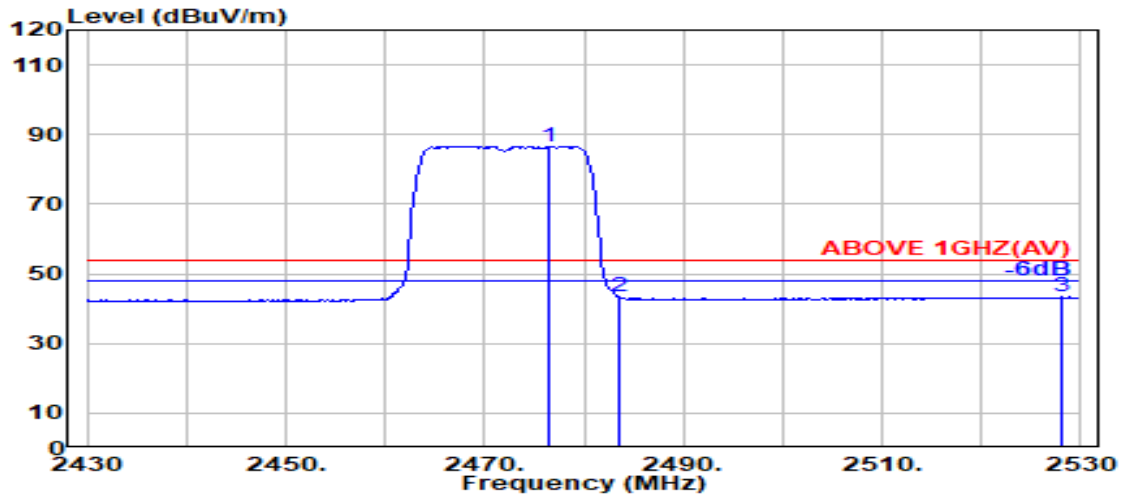


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.35	5.82	39.87	92.40	86.70	---	---	Average
2483.500	28.37	5.83	39.87	48.95	43.27	54.00	10.73	Average
2528.100	28.57	5.88	39.88	48.75	43.33	54.00	10.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

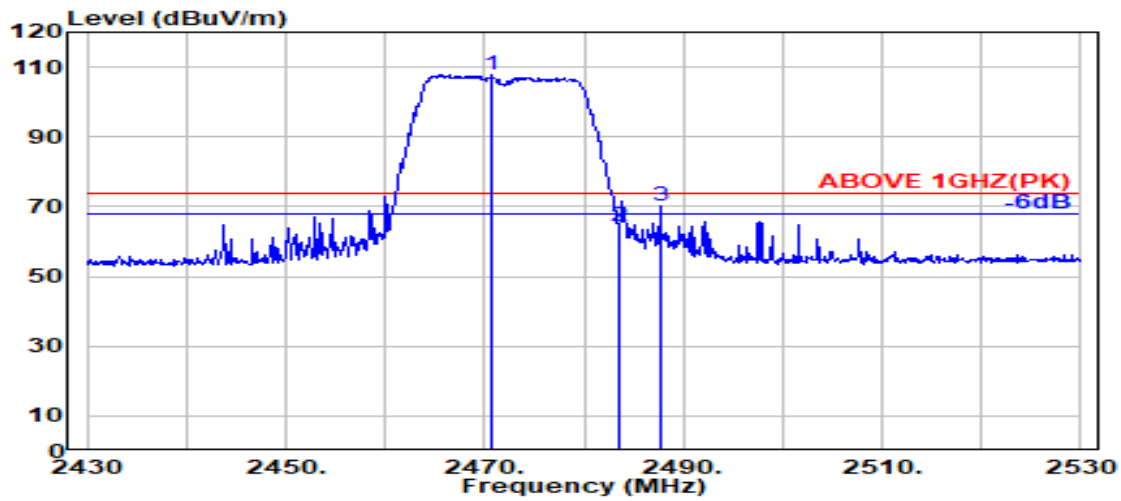

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.34	5.82	39.87	113.53	107.81	---	---	Peak
2483.500	28.37	5.83	39.87	69.88	64.21	74.00	9.79	Peak
2487.700	28.38	5.84	39.87	75.80	70.14	74.00	3.86	Peak

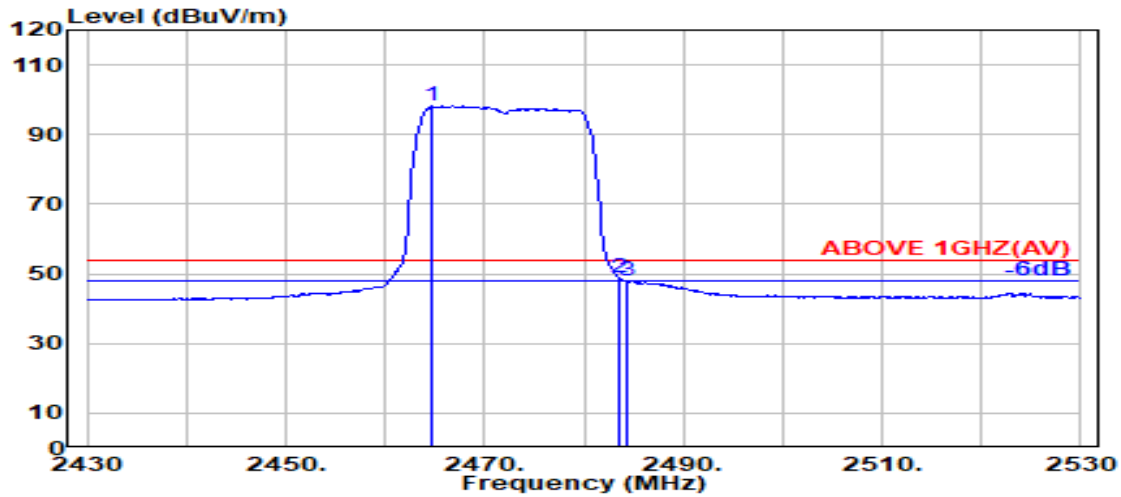


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.33	5.81	39.87	103.89	98.16	---	---	Average
2483.500	28.37	5.83	39.87	54.65	48.98	54.00	5.02	Average
2484.400	28.37	5.83	39.87	53.69	48.02	54.00	5.98	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

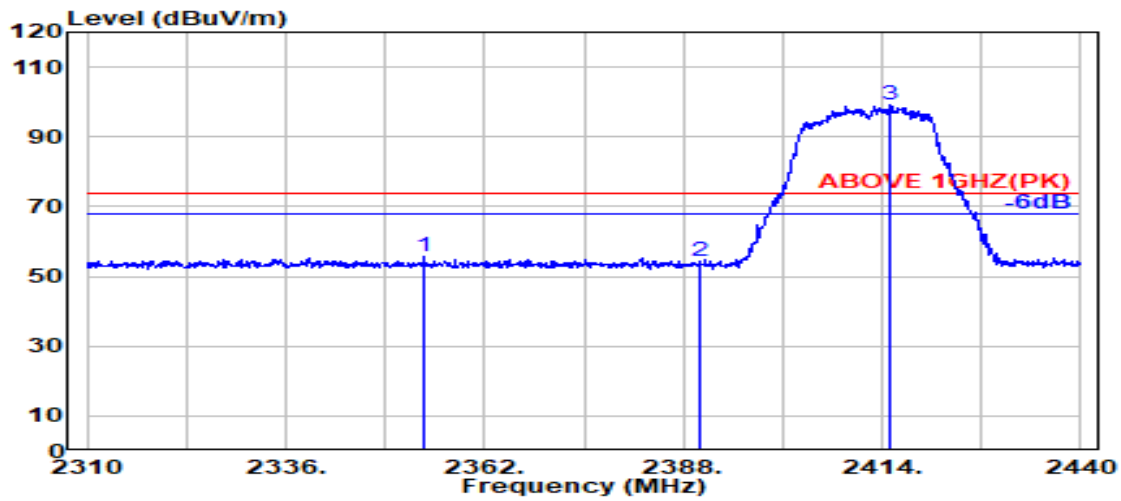

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.200	28.28	5.68	39.88	61.52	55.60	74.00	18.40	Peak
2390.000	28.14	5.72	39.88	60.47	54.45	74.00	19.55	Peak
@ 2415.100	28.16	5.75	39.88	104.94	98.98	---	---	Peak

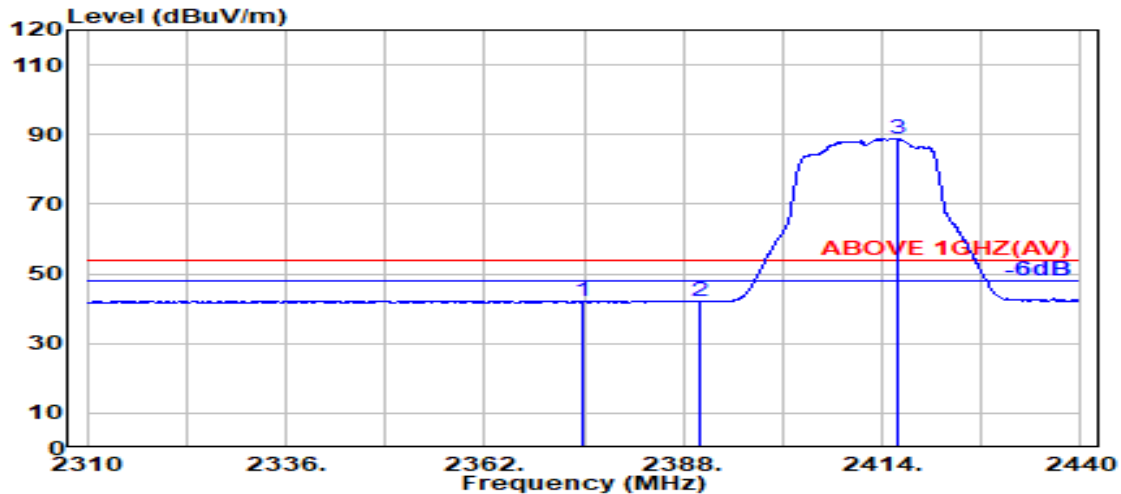


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.700	28.20	5.70	39.88	48.24	42.26	54.00	11.74	Average
2390.000	28.14	5.72	39.88	48.05	42.04	54.00	11.96	Average
@ 2415.900	28.16	5.75	39.88	94.89	88.93	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

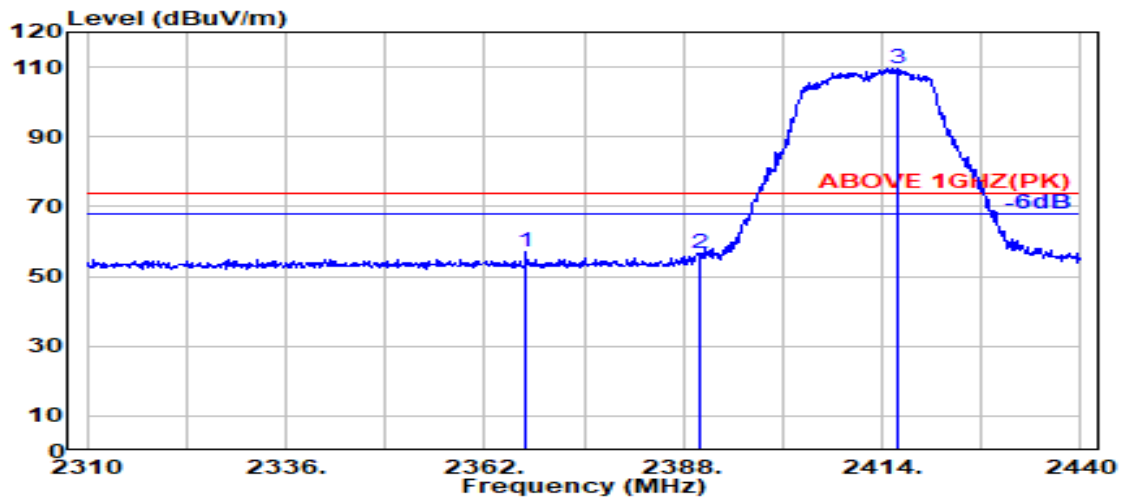

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.500	28.23	5.69	39.88	62.91	56.95	74.00	17.05	Peak
2390.000	28.14	5.72	39.88	62.70	56.68	74.00	17.32	Peak
@ 2416.200	28.17	5.75	39.88	115.66	109.70	---	---	Peak

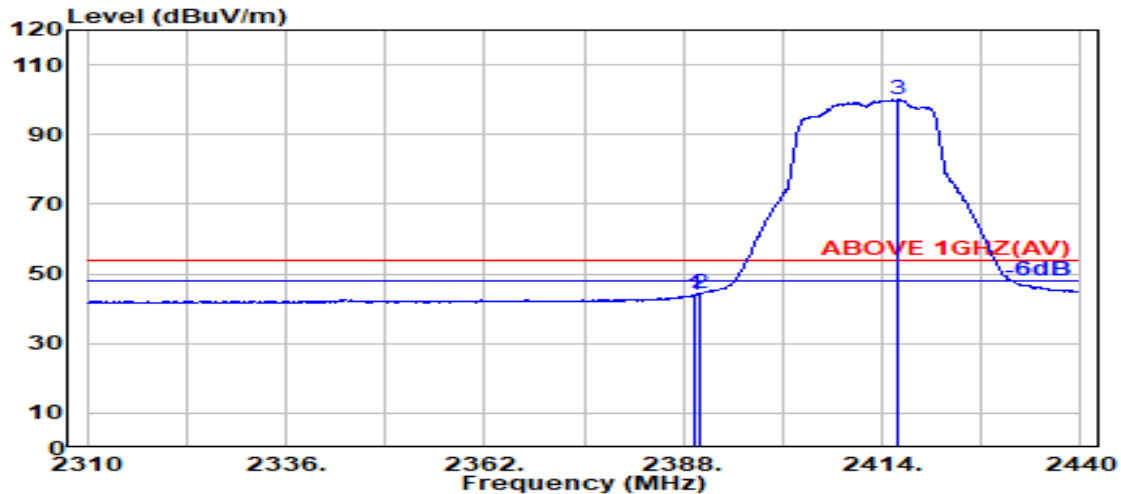


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.16	44.15	54.00	9.85	Average
2390.000	28.14	5.72	39.88	50.19	44.17	54.00	9.83	Average
@ 2416.100	28.16	5.75	39.88	106.02	100.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

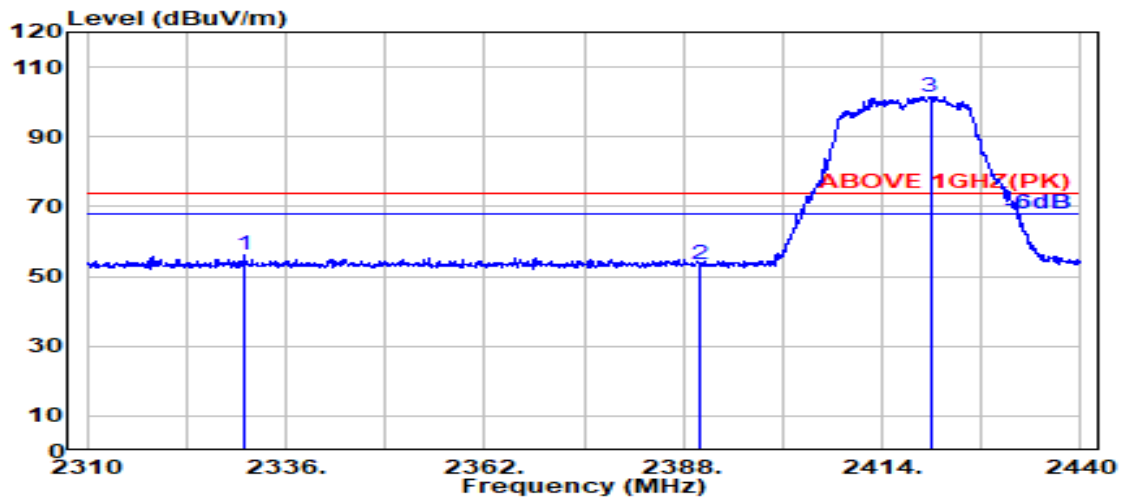

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2330.700	28.18	5.65	39.88	62.04	55.99	74.00	18.01	Peak
2390.000	28.14	5.72	39.88	59.25	53.23	74.00	20.77	Peak
@ 2420.300	28.18	5.76	39.88	107.59	101.65	---	---	Peak

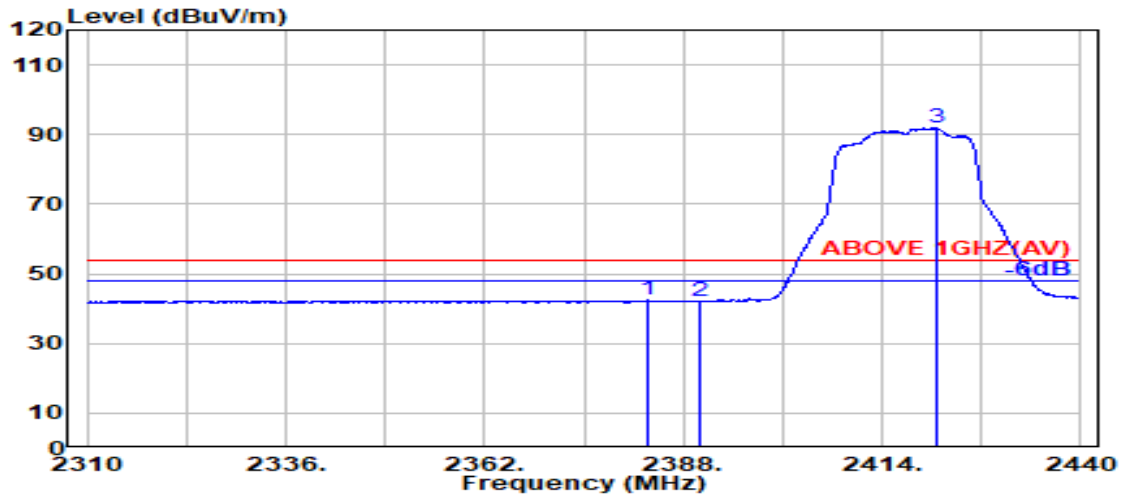


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.400	28.17	5.71	39.88	48.44	42.44	54.00	11.56	Average
2390.000	28.14	5.72	39.88	48.06	42.04	54.00	11.96	Average
@ 2421.000	28.18	5.76	39.88	97.90	91.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

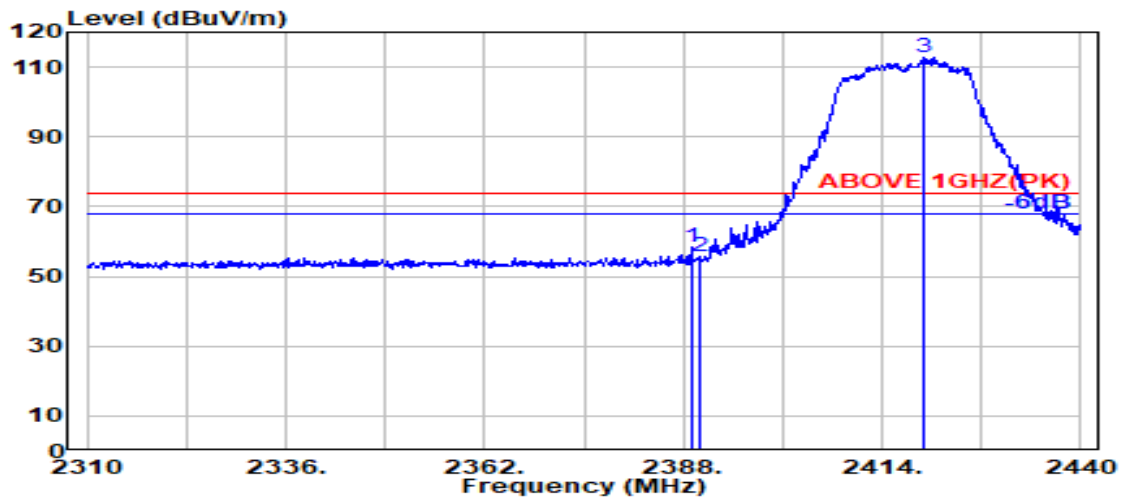

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	64.53	58.51	74.00	15.49	Peak
2390.000	28.14	5.72	39.88	61.66	55.64	74.00	18.36	Peak
@ 2419.400	28.18	5.76	39.88	118.68	112.74	---	---	Peak

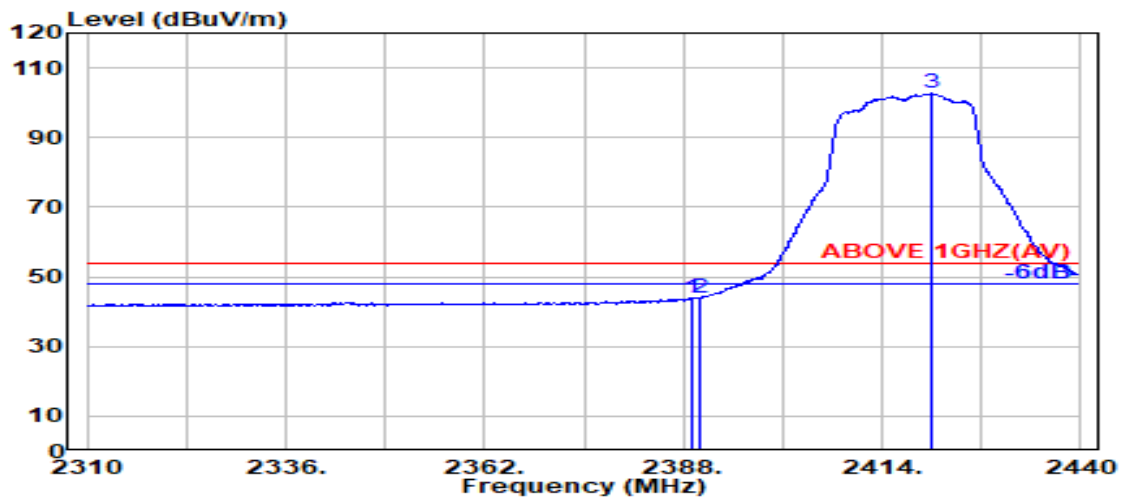


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	50.10	44.08	54.00	9.92	Average
2390.000	28.14	5.72	39.88	49.80	43.78	54.00	10.22	Average
@ 2420.400	28.18	5.76	39.88	108.58	102.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

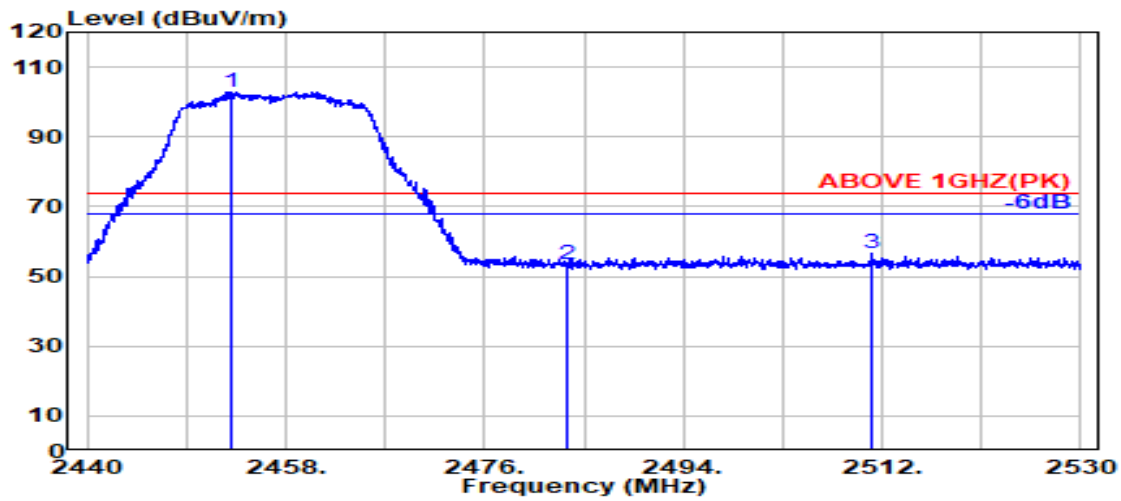

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	28.31	5.80	39.87	108.73	102.96	---	---	Peak
2483.500	28.37	5.83	39.87	59.12	53.45	74.00	20.55	Peak
2511.100	28.47	5.86	39.87	62.21	56.67	74.00	17.33	Peak

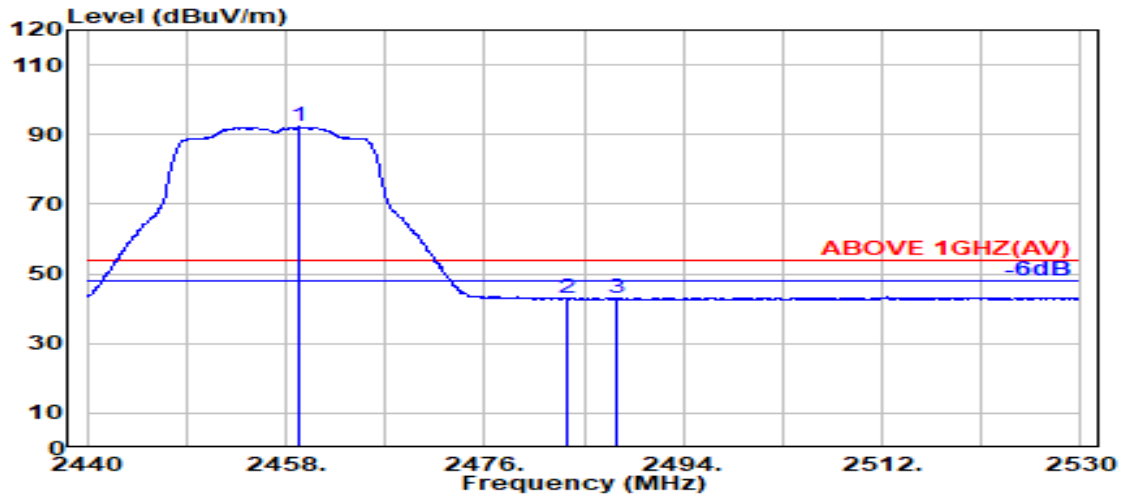


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	28.32	5.80	39.87	97.92	92.17	---	---	Average
2483.500	28.37	5.83	39.87	48.60	42.93	54.00	11.07	Average
2488.000	28.38	5.84	39.87	48.81	43.15	54.00	10.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

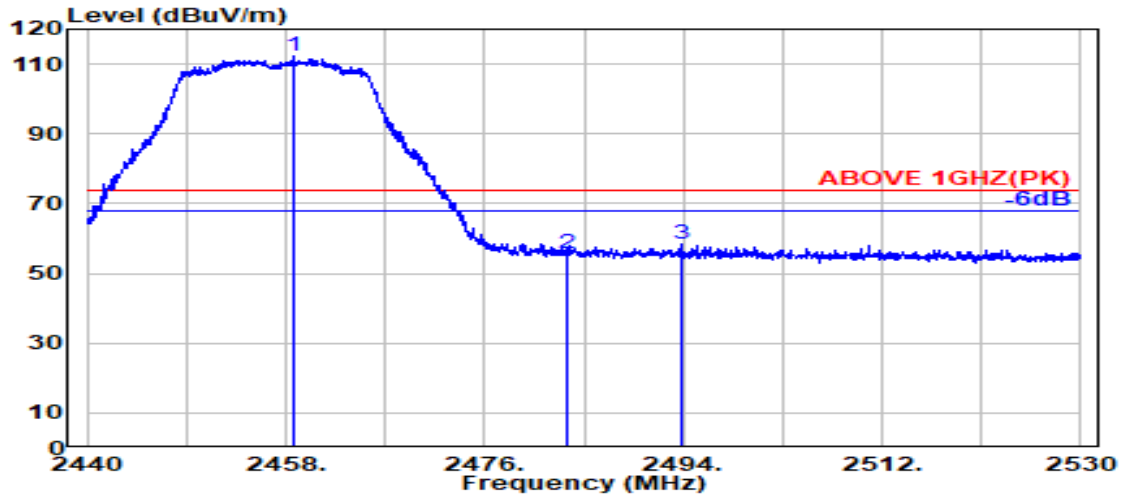

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.32	5.80	39.87	117.90	112.15	---	---	Peak
2483.500	28.37	5.83	39.87	61.16	55.49	74.00	18.51	Peak
2493.750	28.39	5.84	39.87	63.86	58.22	74.00	15.78	Peak

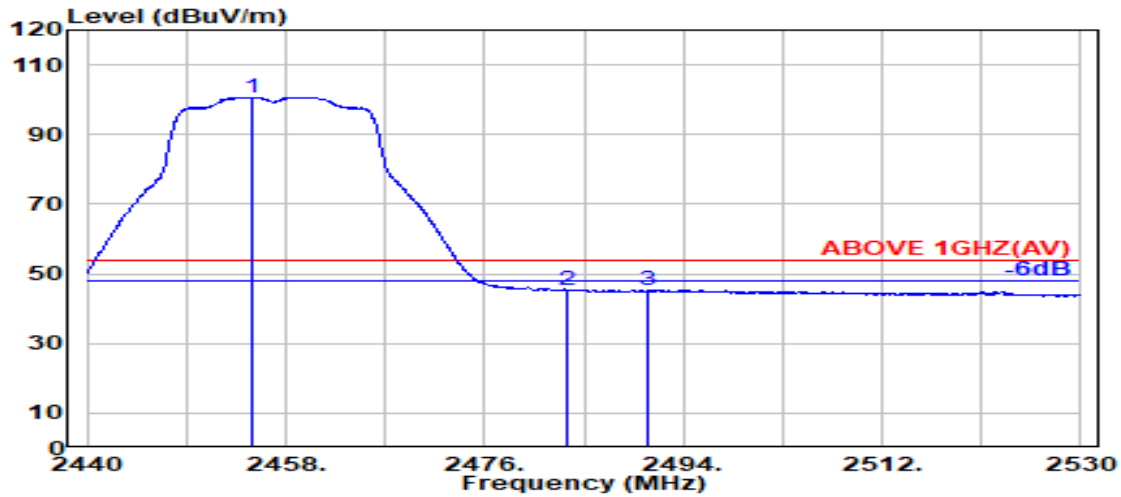


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.850	28.31	5.80	39.87	106.47	100.71	---	---	Average
2483.500	28.37	5.83	39.87	50.99	45.32	54.00	8.68	Average
2490.850	28.38	5.84	39.87	50.91	45.26	54.00	8.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

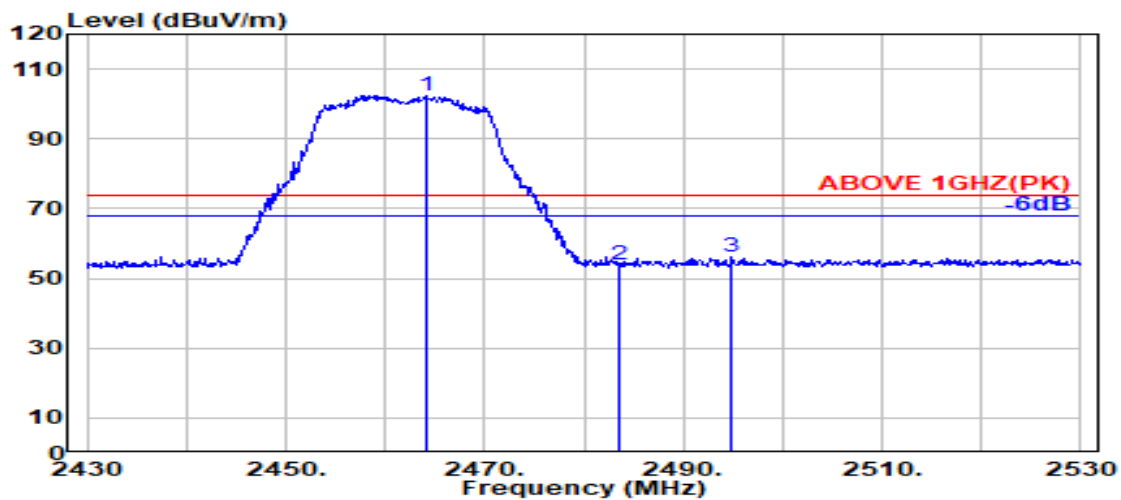

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.33	5.81	39.87	108.22	102.48	---	---	Peak
2483.500	28.37	5.83	39.87	59.60	53.93	74.00	20.07	Peak
2494.800	28.39	5.84	39.87	61.69	56.06	74.00	17.94	Peak

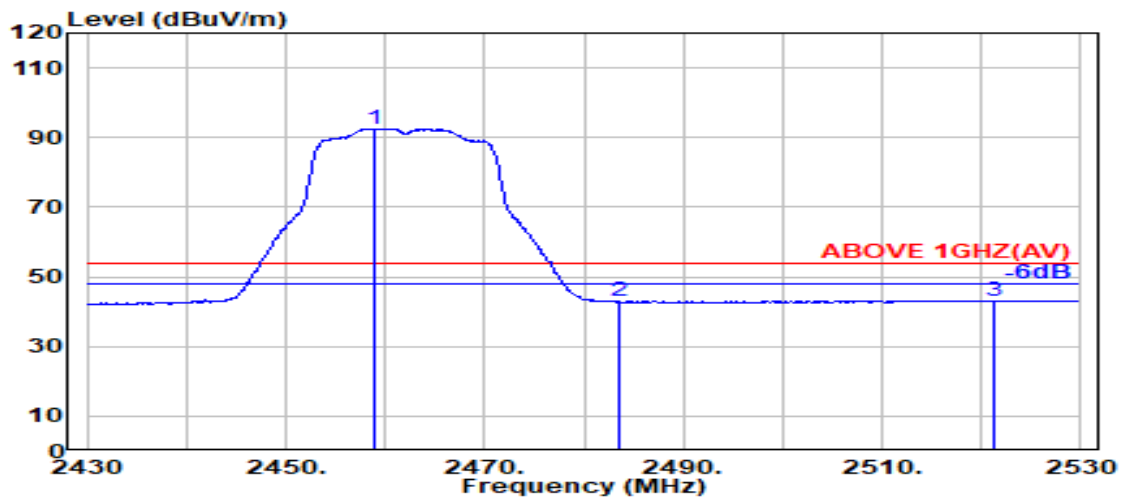


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.32	5.80	39.87	98.35	92.60	---	---	Average
2483.500	28.37	5.83	39.87	48.56	42.89	54.00	11.11	Average
2521.300	28.53	5.88	39.88	48.70	43.23	54.00	10.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

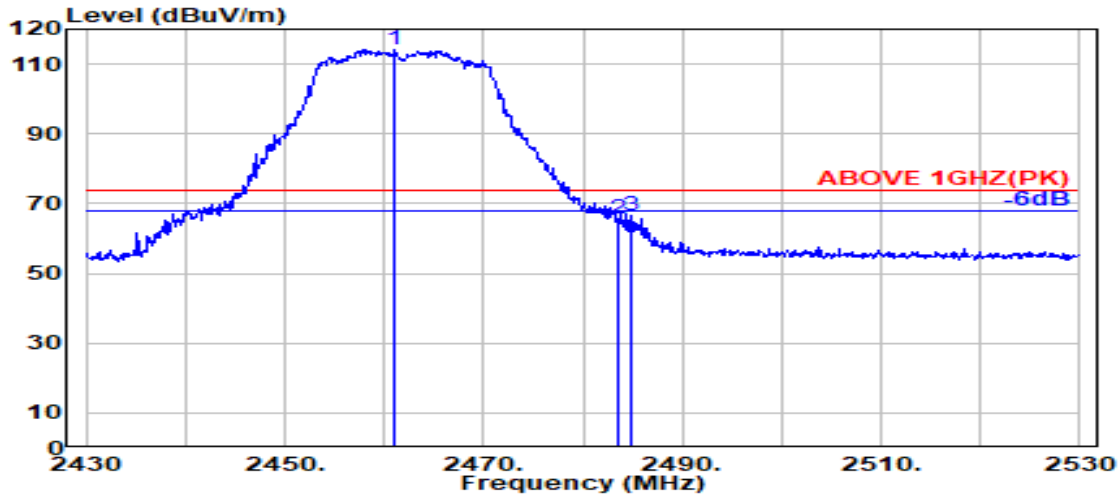

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.32	5.80	39.87	119.86	114.11	---	---	Peak
2483.500	28.37	5.83	39.87	71.38	65.70	74.00	8.30	Peak
2484.900	28.37	5.83	39.87	72.43	66.76	74.00	7.24	Peak

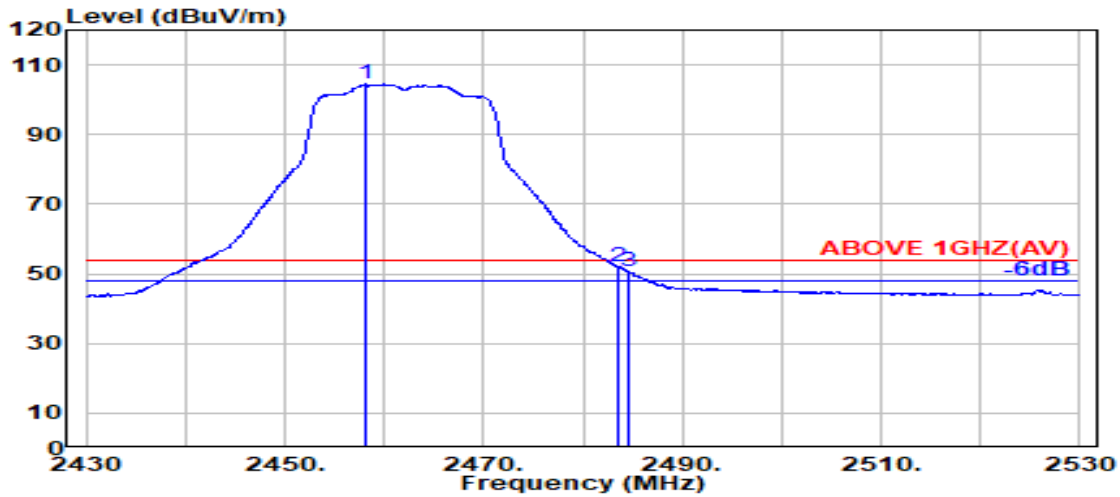


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.32	5.80	39.87	110.16	104.41	---	---	Average
2483.500	28.37	5.83	39.87	57.73	52.06	54.00	1.94	Average
2484.500	28.37	5.83	39.87	56.43	50.76	54.00	3.24	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

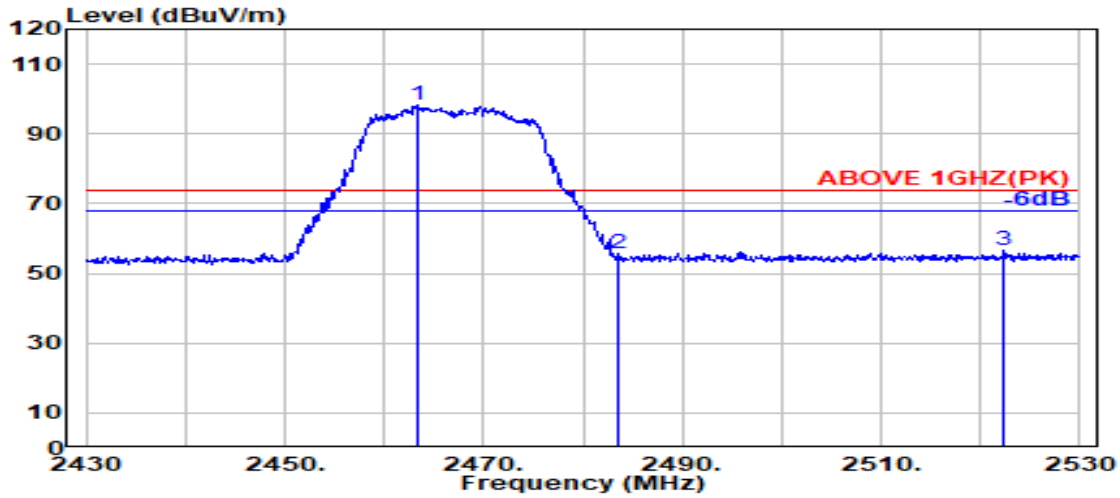

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	104.03	98.29	---	---	Peak
2483.500	28.37	5.83	39.87	61.23	55.56	74.00	18.44	Peak
2522.400	28.54	5.88	39.88	61.94	56.48	74.00	17.52	Peak

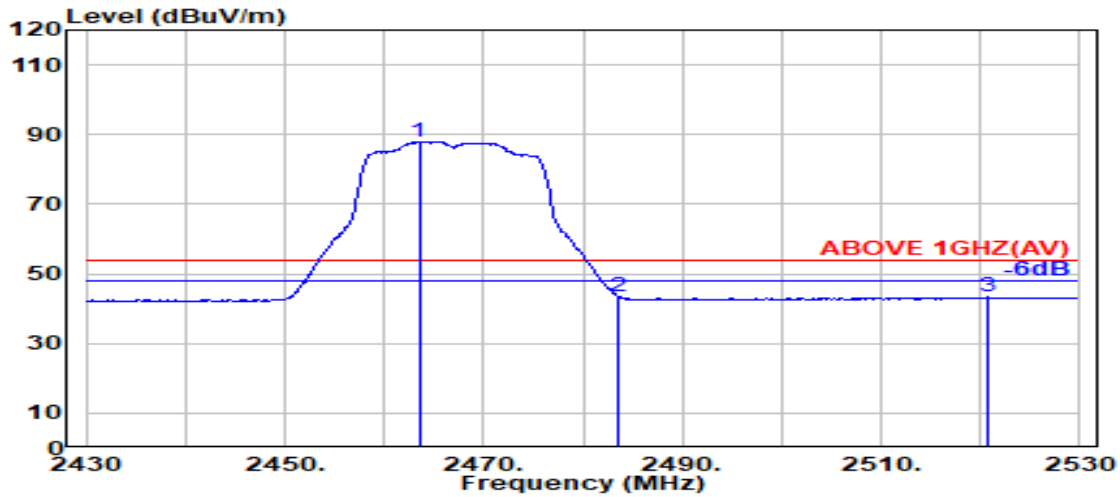


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.33	5.81	39.87	93.70	87.96	---	---	Average
2483.500	28.37	5.83	39.87	49.36	43.68	54.00	10.32	Average
2520.700	28.52	5.88	39.88	48.74	43.26	54.00	10.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

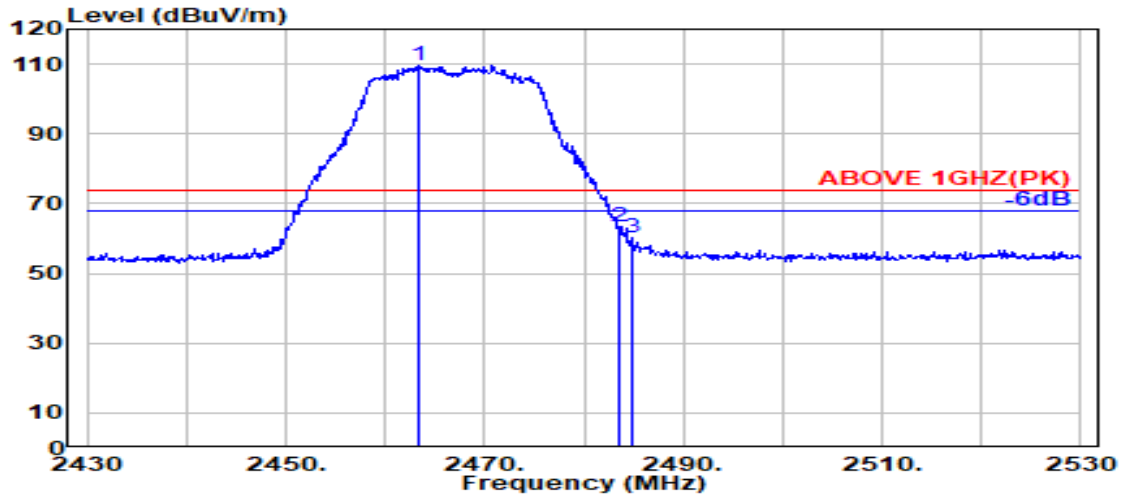

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	115.36	109.62	---	---	Peak
2483.500	28.37	5.83	39.87	68.92	63.25	74.00	10.75	Peak
2484.800	28.37	5.83	39.87	65.82	60.15	74.00	13.85	Peak

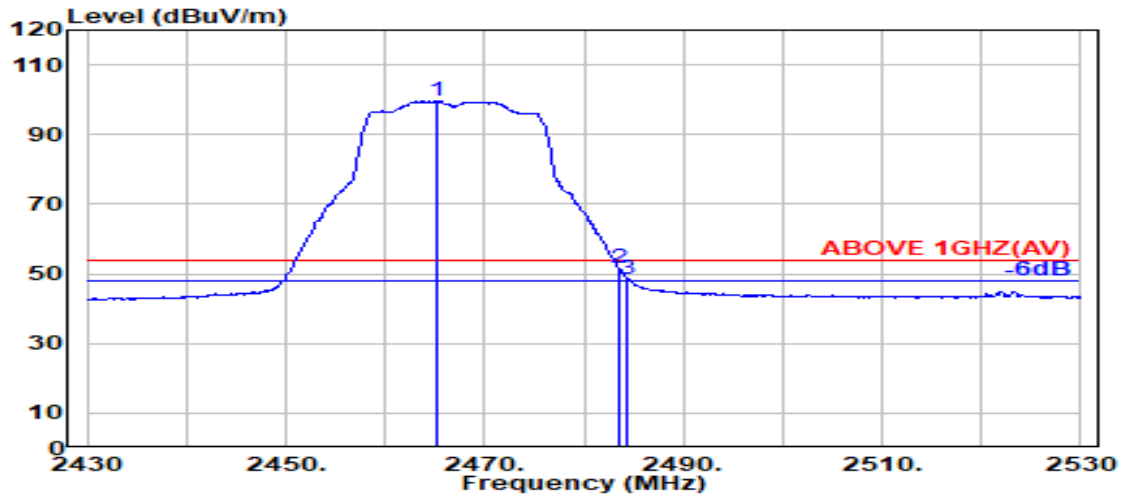


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.33	5.81	39.87	105.30	99.56	---	---	Average
2483.500	28.37	5.83	39.87	57.40	51.72	54.00	2.28	Average
2484.400	28.37	5.83	39.87	54.19	48.52	54.00	5.48	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

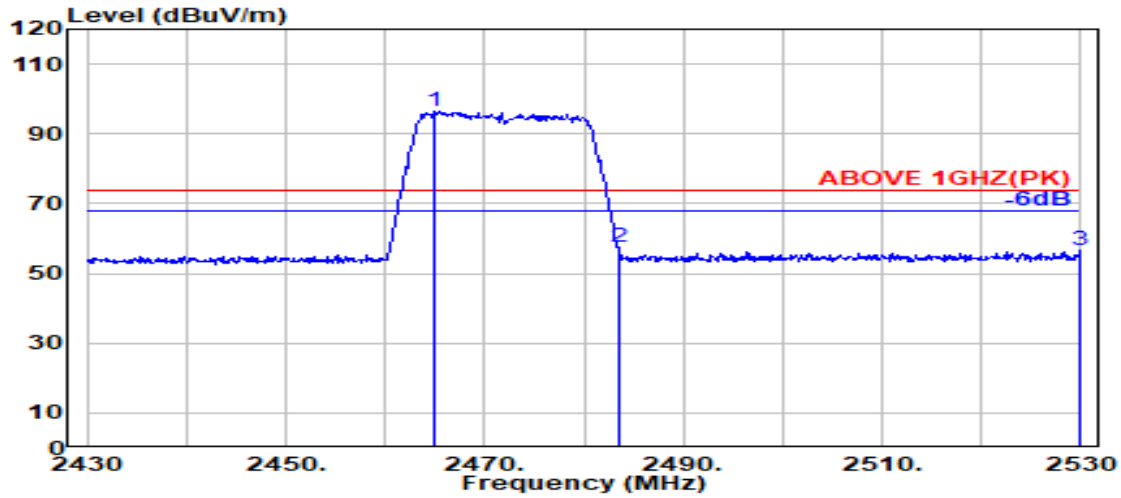

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.33	5.81	39.87	102.02	96.29	---	---	Peak
2483.500	28.37	5.83	39.87	63.22	57.55	74.00	16.45	Peak
2529.900	28.58	5.89	39.88	61.87	56.46	74.00	17.54	Peak

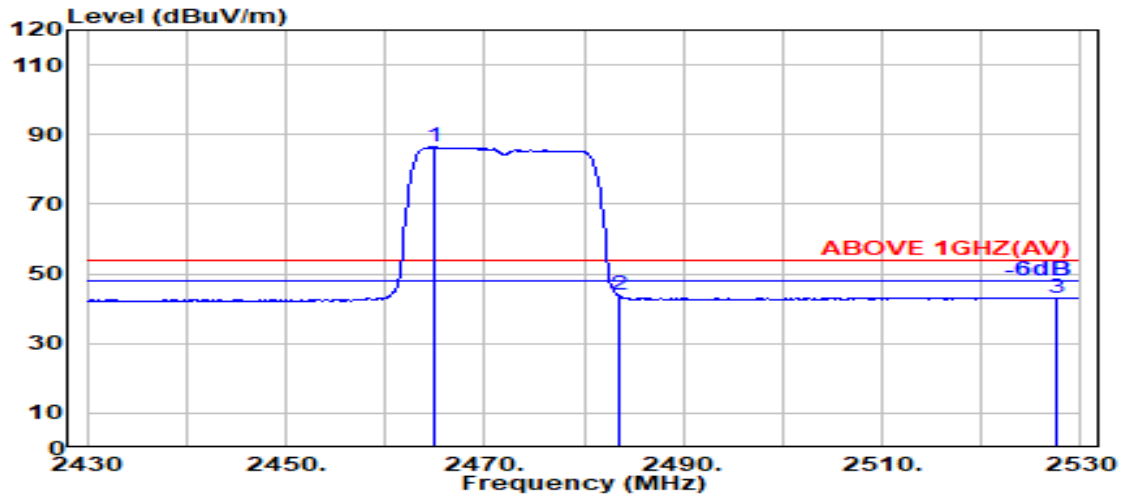


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.33	5.81	39.87	92.16	86.43	---	---	Average
2483.500	28.37	5.83	39.87	49.39	43.71	54.00	10.29	Average
2527.500	28.57	5.88	39.88	48.63	43.20	54.00	10.80	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

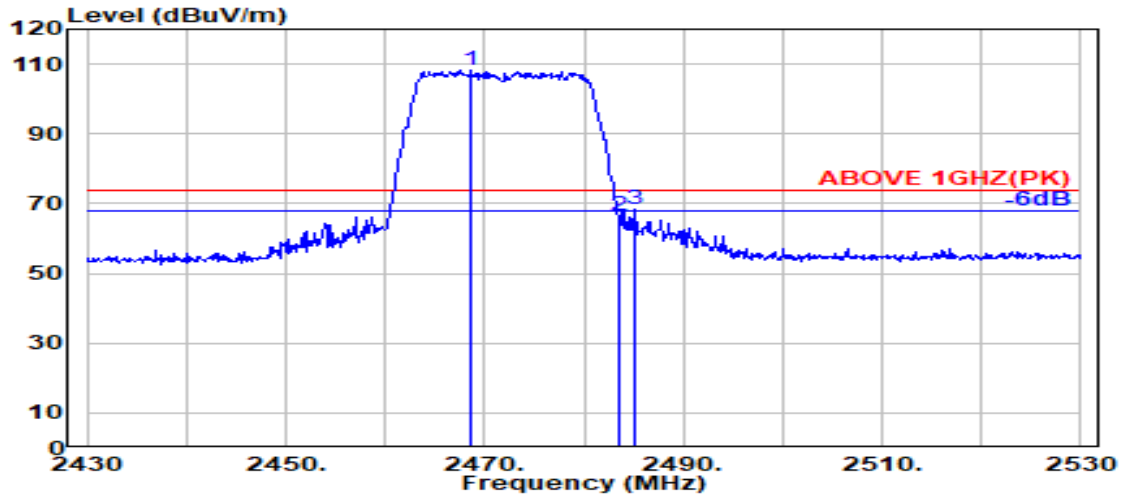

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.600	28.34	5.81	39.87	113.78	108.05	---	---	Peak
2483.500	28.37	5.83	39.87	72.37	66.70	74.00	7.30	Peak
2485.200	28.37	5.83	39.87	73.97	68.30	74.00	5.70	Peak

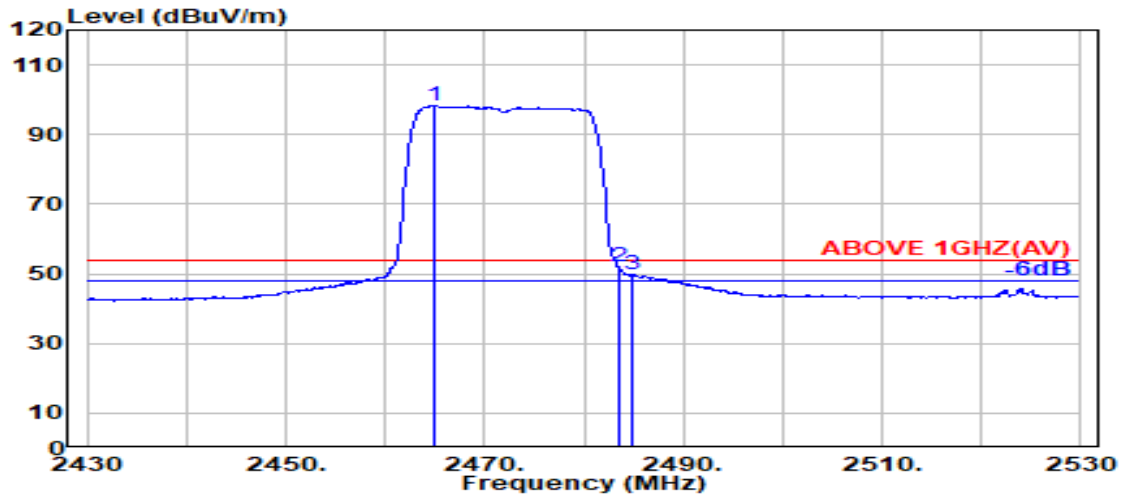


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.33	5.81	39.87	104.15	98.42	---	---	Average
2483.500	28.37	5.83	39.87	57.53	51.86	54.00	2.14	Average
2484.800	28.37	5.83	39.87	55.48	49.81	54.00	4.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

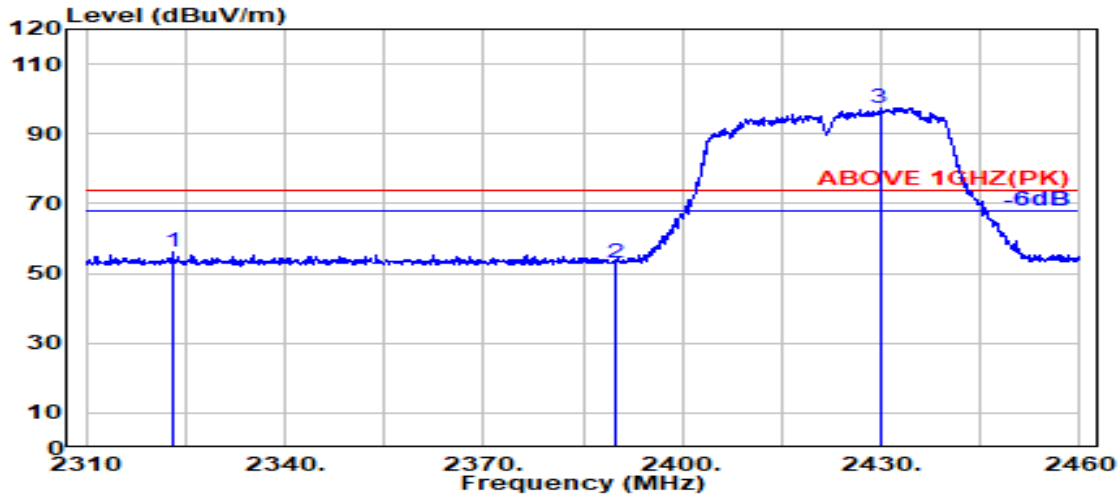

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2323.200	28.14	5.64	39.88	62.11	56.01	74.00	17.99	Peak
2390.000	28.14	5.72	39.88	59.15	53.13	74.00	20.87	Peak
@ 2429.800	28.22	5.77	39.88	103.39	97.51	---	---	Peak

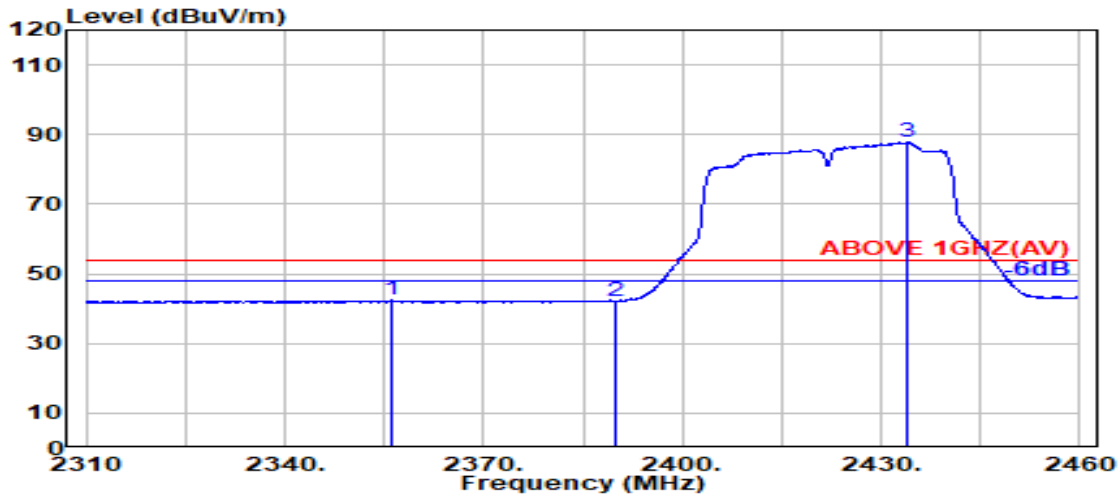


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2356.000	28.28	5.68	39.88	48.35	42.42	54.00	11.58	Average
2390.000	28.14	5.72	39.88	48.19	42.17	54.00	11.83	Average
@ 2434.100	28.24	5.77	39.87	93.65	87.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

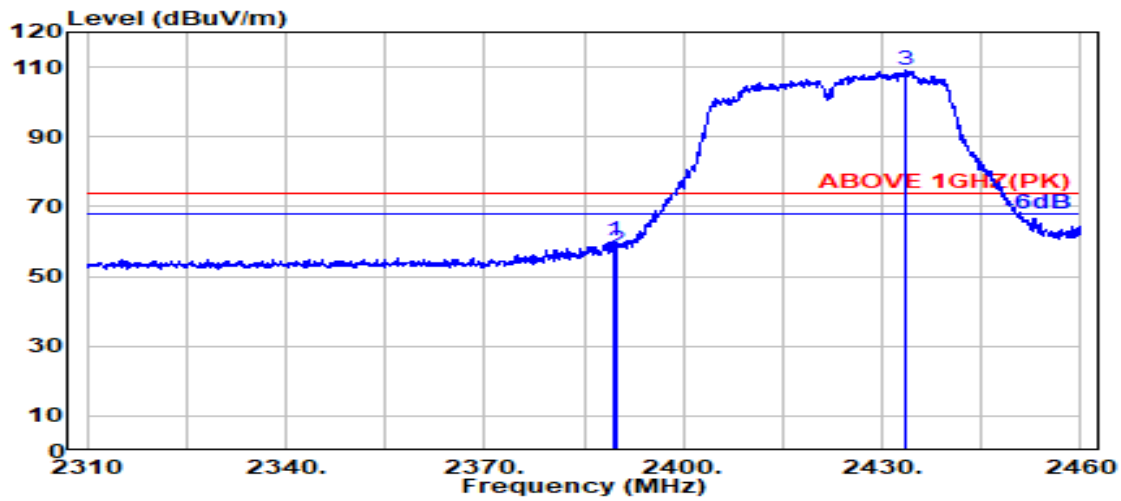

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	66.24	60.22	74.00	13.78	Peak
2390.000	28.14	5.72	39.88	63.75	57.73	74.00	16.27	Peak
@ 2433.500	28.23	5.77	39.87	114.83	108.97	---	---	Peak

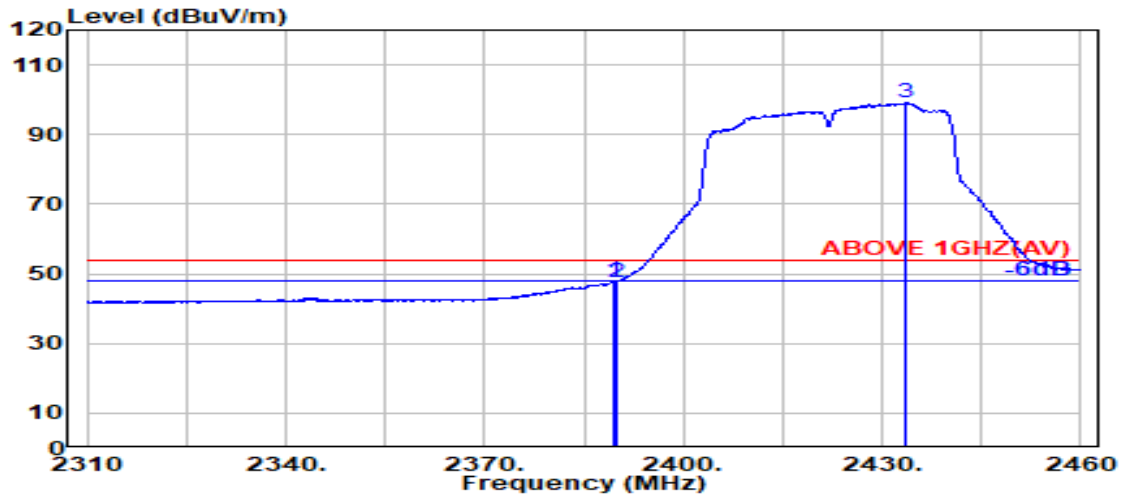


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	53.89	47.88	54.00	6.12	Average
2390.000	28.14	5.72	39.88	53.72	47.71	54.00	6.29	Average
@ 2433.700	28.24	5.77	39.87	104.98	99.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

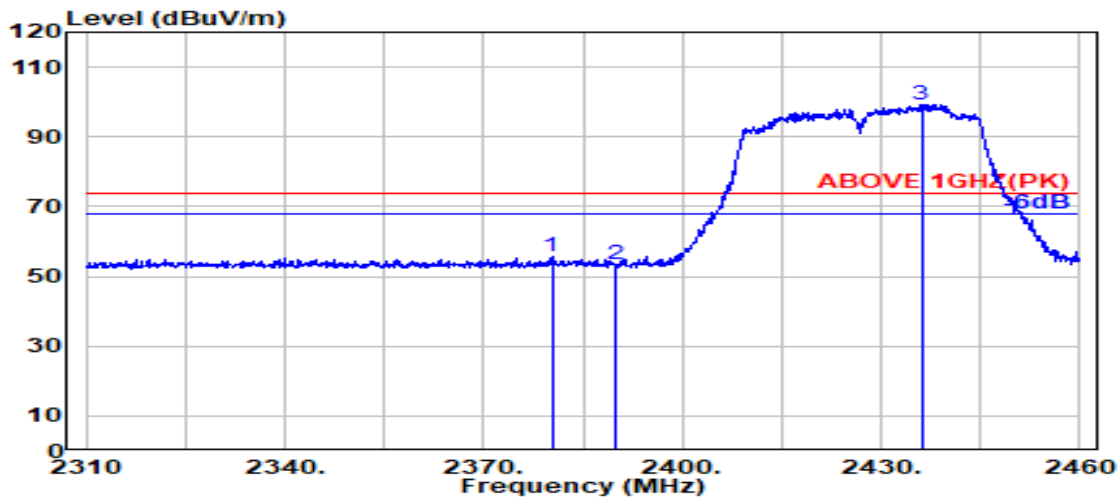

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.300	28.18	5.71	39.88	61.70	55.71	74.00	18.29	Peak
2390.000	28.14	5.72	39.88	59.54	53.52	74.00	20.48	Peak
@ 2436.100	28.24	5.78	39.87	105.17	99.31	---	---	Peak

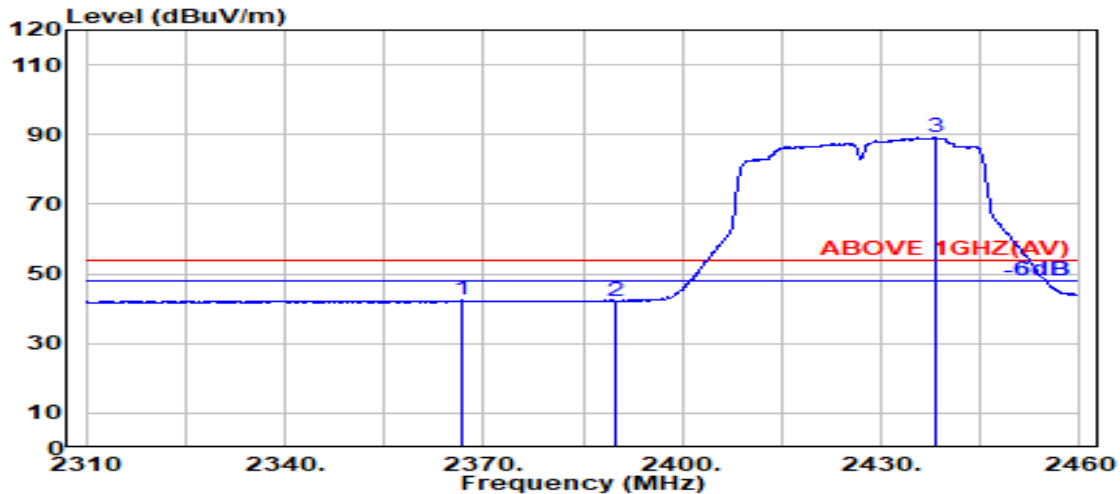


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2366.700	28.23	5.69	39.88	48.45	42.50	54.00	11.50	Average
2390.000	28.14	5.72	39.88	48.17	42.16	54.00	11.84	Average
@ 2438.200	28.25	5.78	39.87	94.99	89.14	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

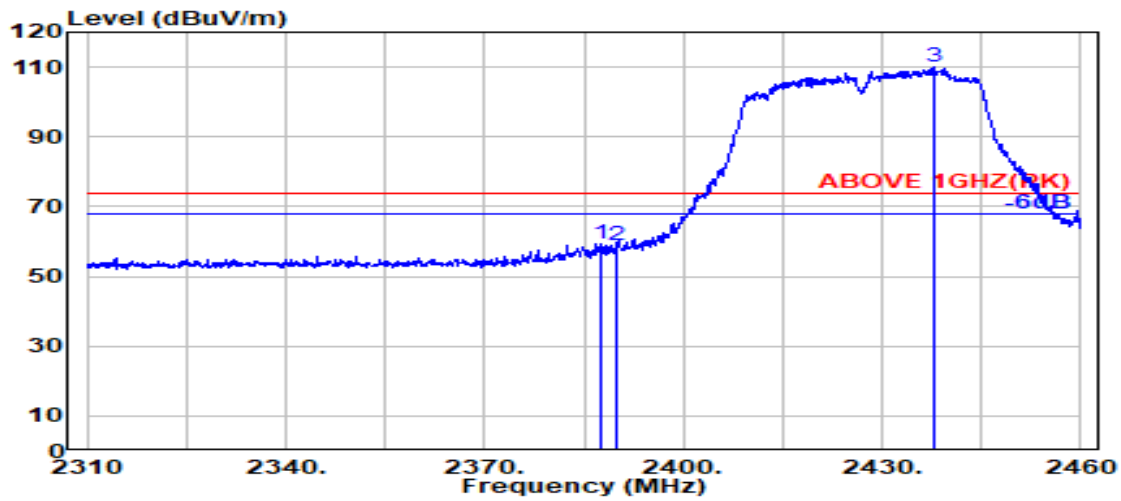

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	28.15	5.72	39.88	65.50	59.49	74.00	14.51	Peak
2390.000	28.14	5.72	39.88	64.97	58.95	74.00	15.05	Peak
@ 2437.800	28.25	5.78	39.87	115.80	109.95	---	---	Peak

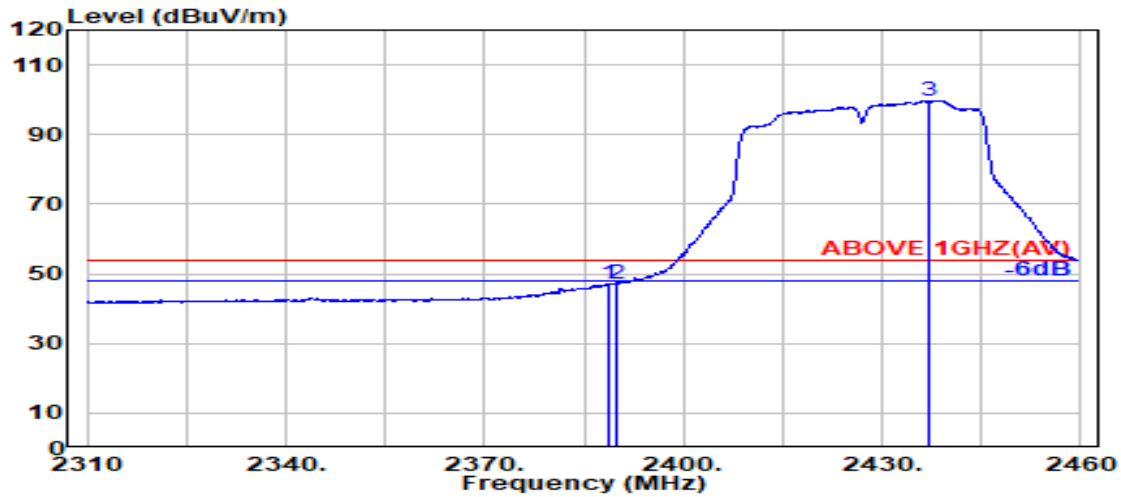


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	53.28	47.27	54.00	6.73	Average
2390.000	28.14	5.72	39.88	53.18	47.17	54.00	6.83	Average
@ 2437.000	28.25	5.78	39.87	105.56	99.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

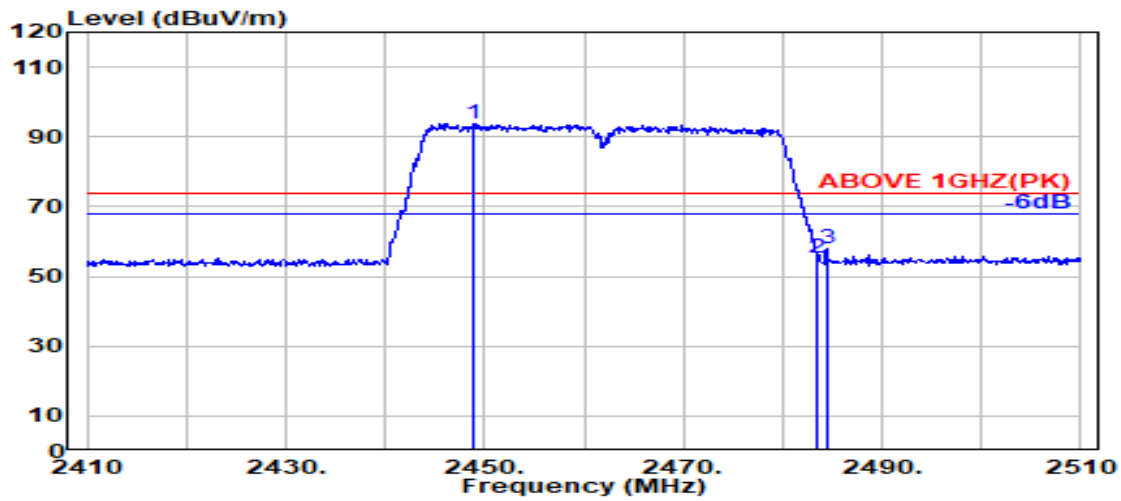

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.900	28.30	5.79	39.87	99.70	93.91	---	---	Peak
2483.500	28.37	5.83	39.87	60.90	55.23	74.00	18.77	Peak
2484.400	28.37	5.83	39.87	63.55	57.88	74.00	16.12	Peak

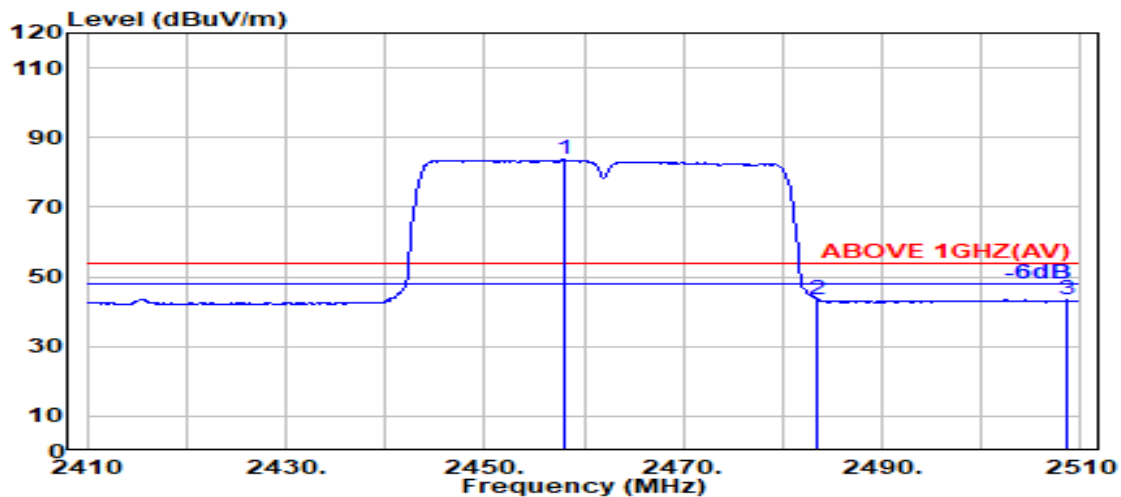


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.32	5.80	39.87	89.34	83.58	---	---	Average
2483.500	28.37	5.83	39.87	49.04	43.37	54.00	10.63	Average
2508.600	28.45	5.86	39.87	48.91	43.35	54.00	10.65	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

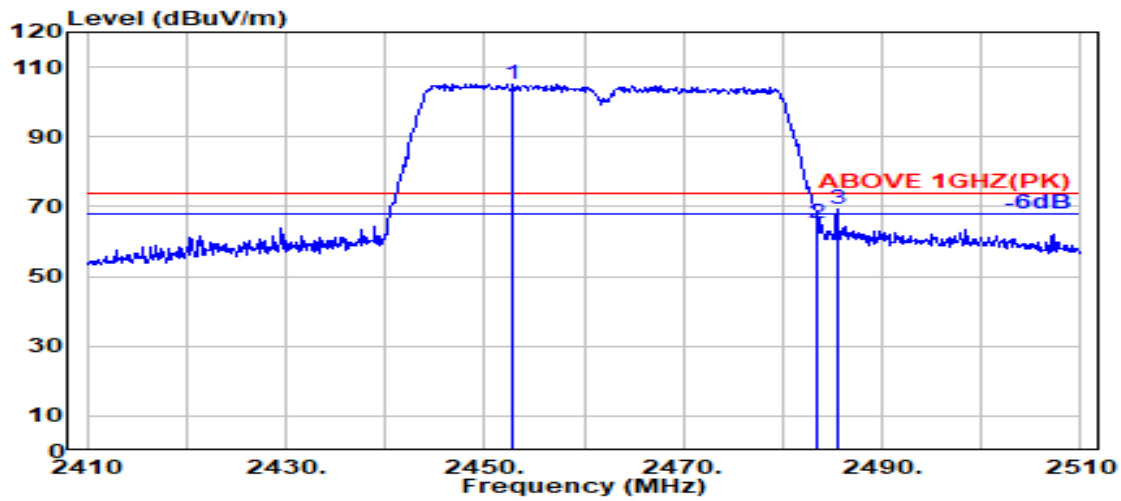

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.800	28.31	5.80	39.87	110.93	105.16	---	---	Peak
2483.500	28.37	5.83	39.87	70.80	65.13	74.00	8.87	Peak
2485.500	28.37	5.83	39.87	75.02	69.35	74.00	4.65	Peak

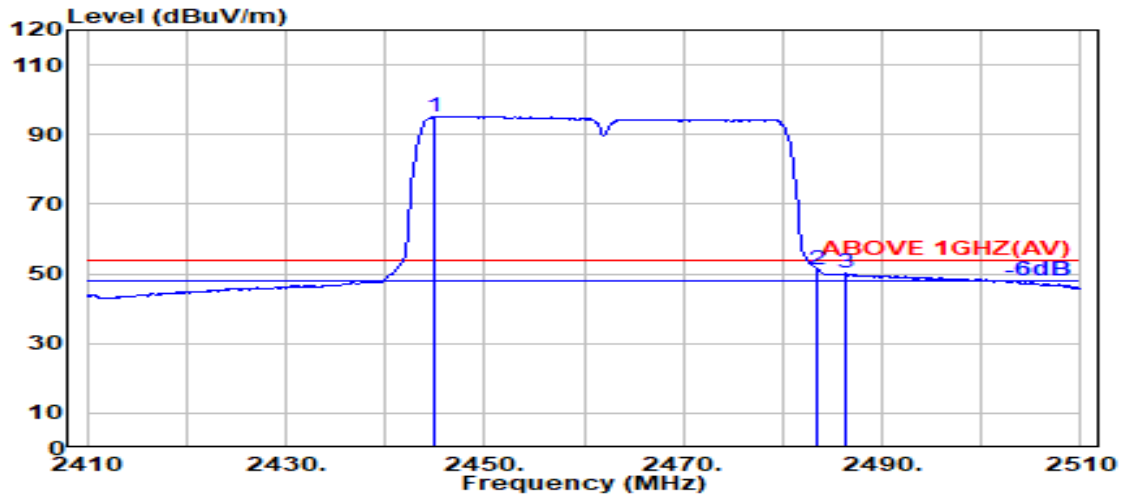


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.900	28.28	5.79	39.87	101.09	95.28	---	---	Average
2483.500	28.37	5.83	39.87	56.68	51.00	54.00	3.00	Average
2486.300	28.37	5.83	39.87	55.73	50.07	54.00	3.93	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

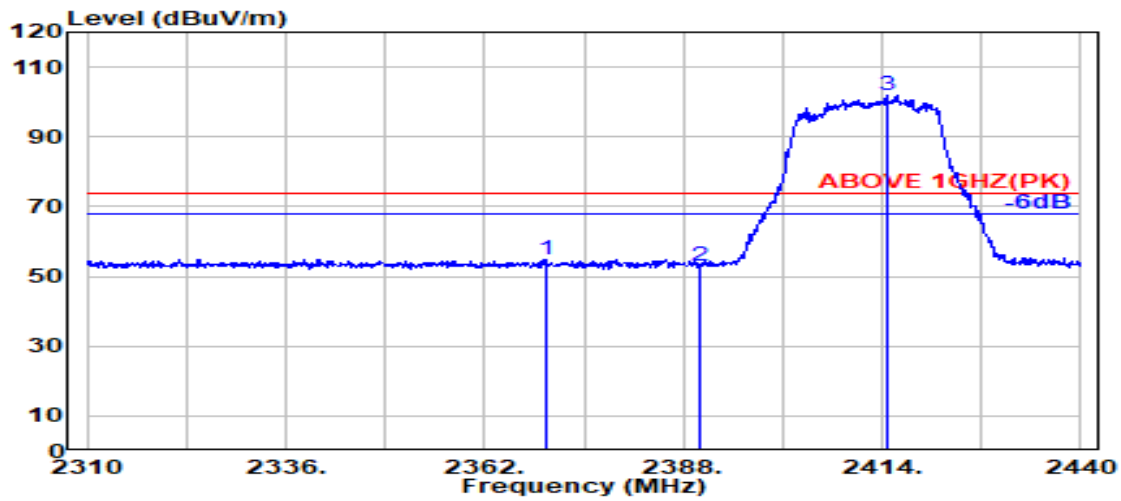

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.100	28.22	5.70	39.88	60.97	55.00	74.00	19.00	Peak
2390.000	28.14	5.72	39.88	58.81	52.79	74.00	21.21	Peak
@ 2414.600	28.16	5.75	39.88	107.96	101.99	---	---	Peak

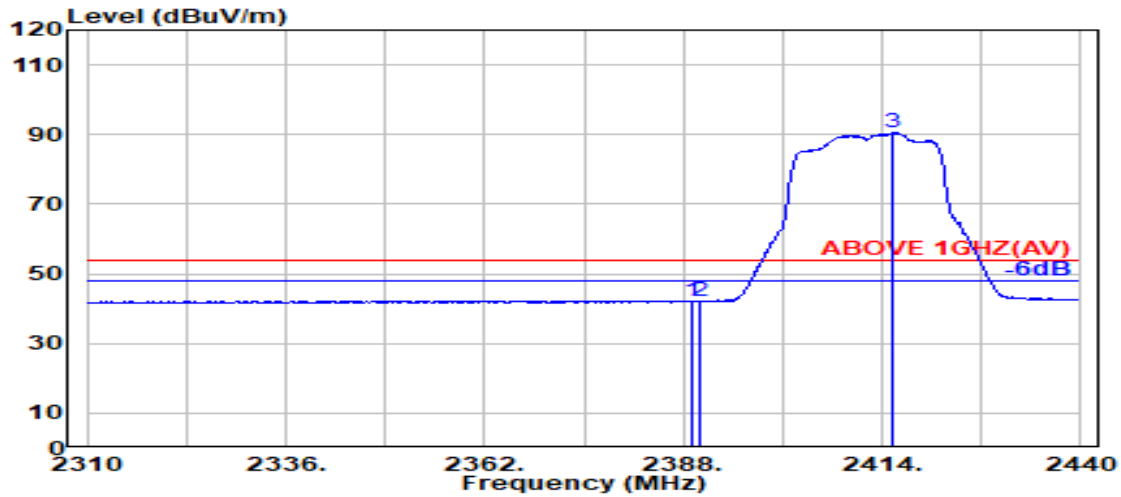


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	48.34	42.33	54.00	11.67	Average
2390.000	28.14	5.72	39.88	48.17	42.16	54.00	11.84	Average
@ 2415.400	28.16	5.75	39.88	96.42	90.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

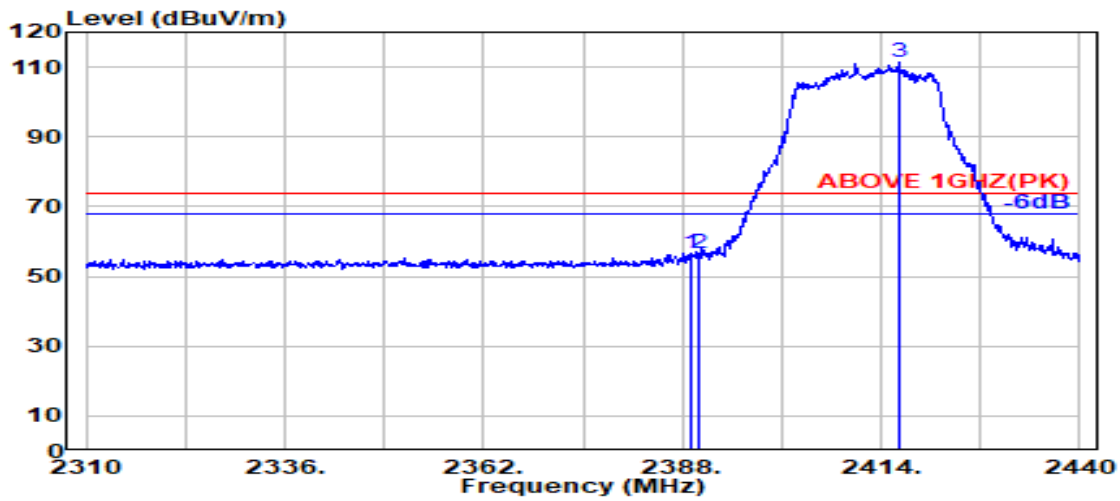

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	62.68	56.67	74.00	17.33	Peak
2390.000	28.14	5.72	39.88	62.75	56.74	74.00	17.26	Peak
@ 2416.300	28.17	5.75	39.88	117.39	111.43	---	---	Peak

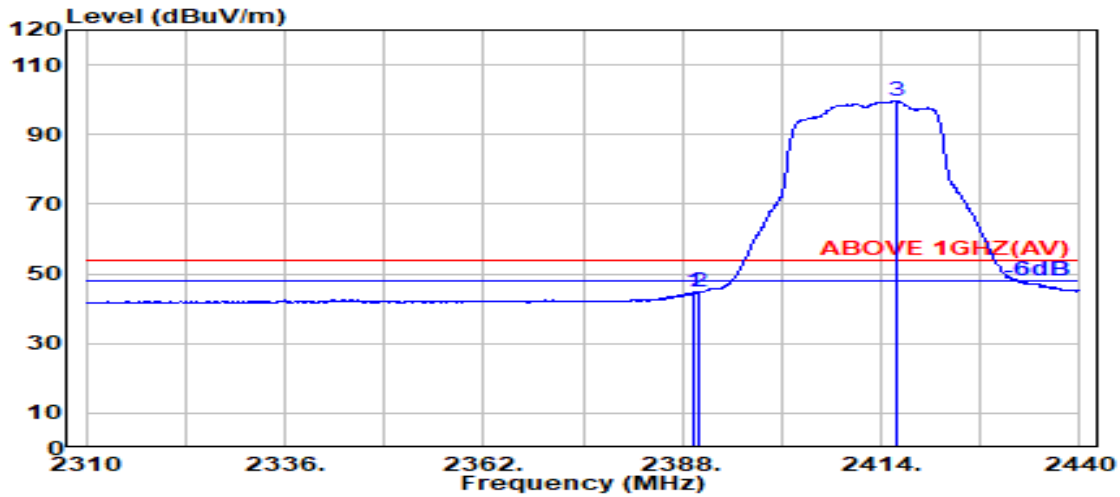


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.67	44.65	54.00	9.35	Average
2390.000	28.14	5.72	39.88	50.75	44.73	54.00	9.27	Average
@ 2416.000	28.16	5.75	39.88	105.66	99.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

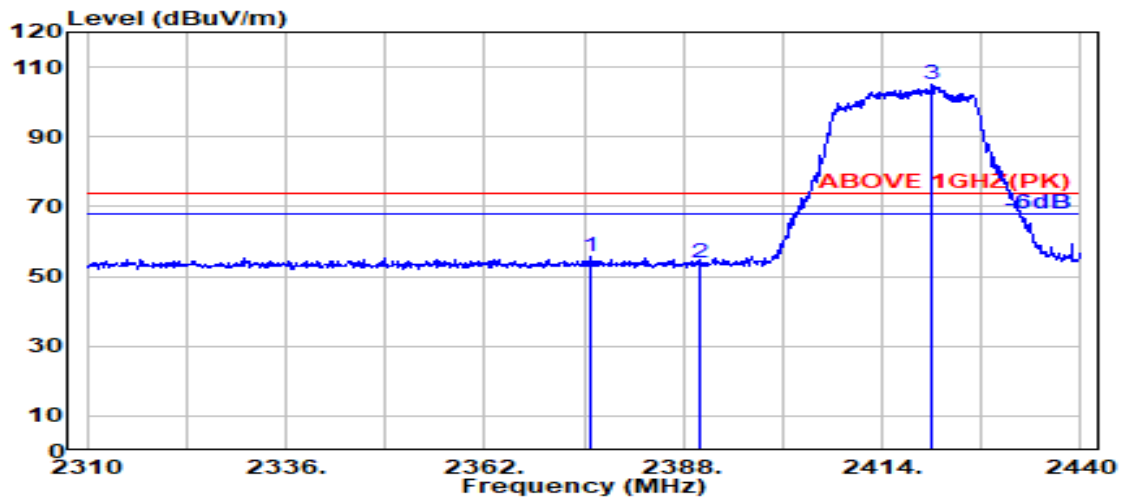

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	61.55	55.57	74.00	18.43	Peak
2390.000	28.14	5.72	39.88	59.99	53.98	74.00	20.02	Peak
@ 2420.600	28.18	5.76	39.88	110.92	104.99	---	---	Peak

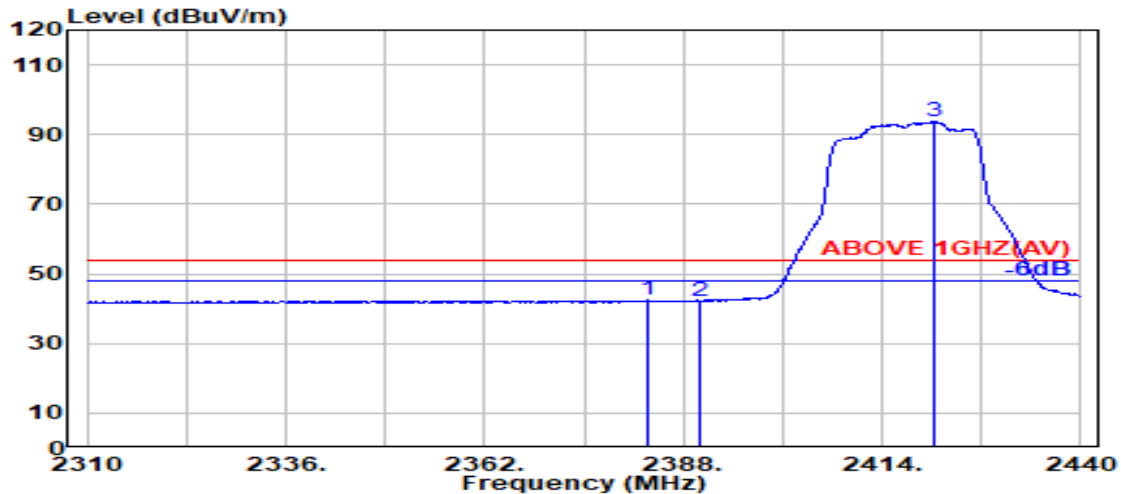


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.300	28.17	5.71	39.88	48.41	42.41	54.00	11.59	Average
2390.000	28.14	5.72	39.88	48.20	42.19	54.00	11.81	Average
@ 2420.800	28.18	5.76	39.88	99.83	93.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

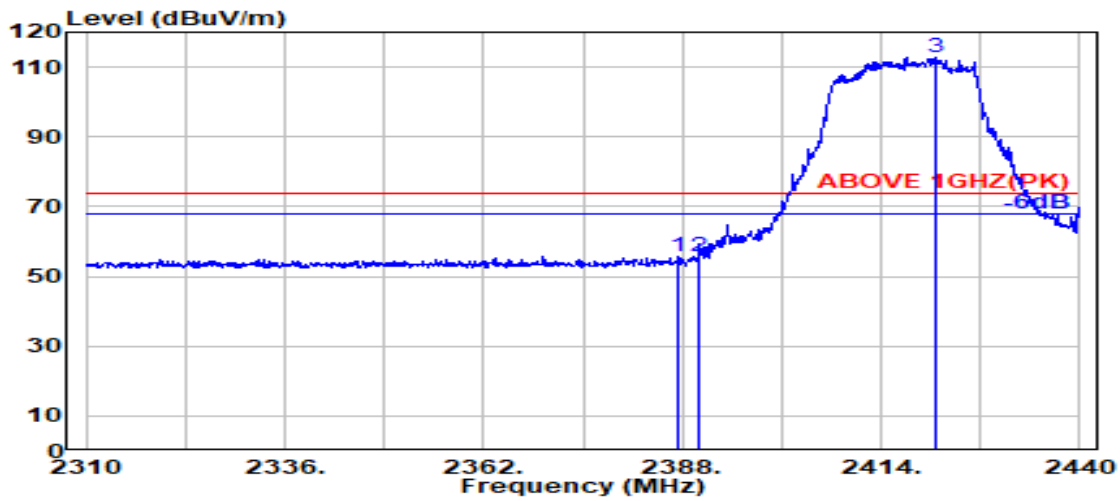

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.600	28.15	5.72	39.88	61.89	55.88	74.00	18.12	Peak
2390.000	28.14	5.72	39.88	61.51	55.50	74.00	18.50	Peak
@ 2421.000	28.18	5.76	39.88	118.75	112.82	---	---	Peak

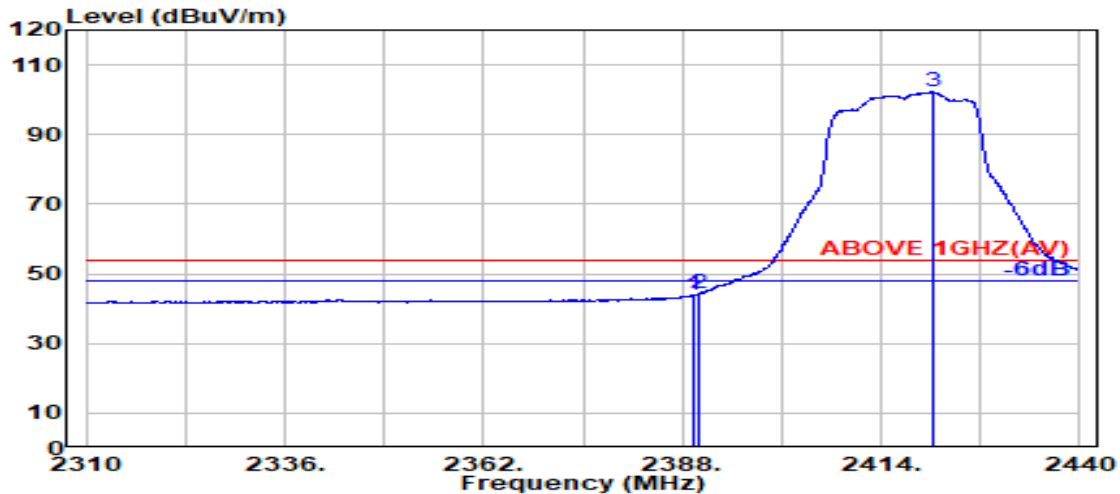


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.10	44.09	54.00	9.91	Average
2390.000	28.14	5.72	39.88	50.40	44.38	54.00	9.62	Average
@ 2420.700	28.18	5.76	39.88	108.20	102.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

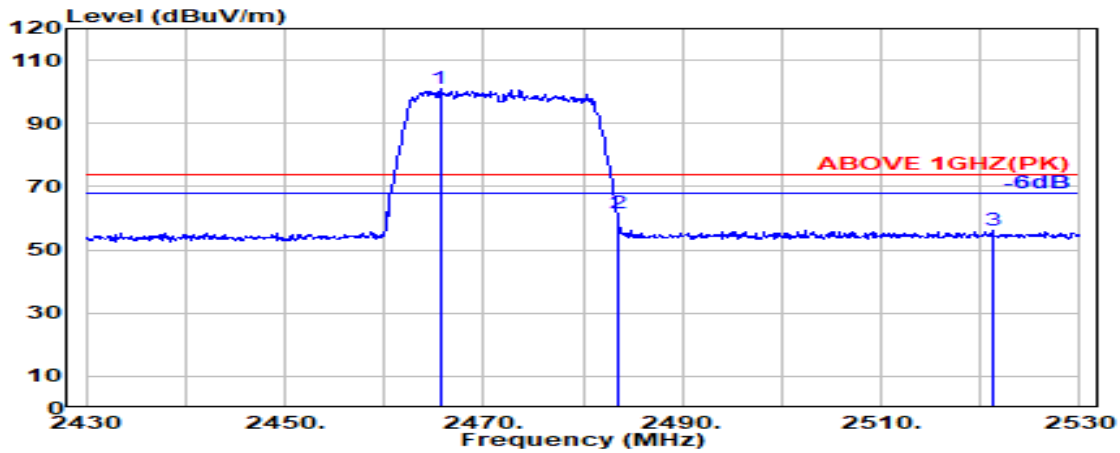

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2465.600	28.33	5.81	39.87	106.88	101.15	---	---	Peak
2483.500	28.37	5.83	39.87	67.24	61.57	74.00	12.43	Peak
@ 2521.200	28.53	5.88	39.88	61.50	56.03	74.00	17.97	Peak

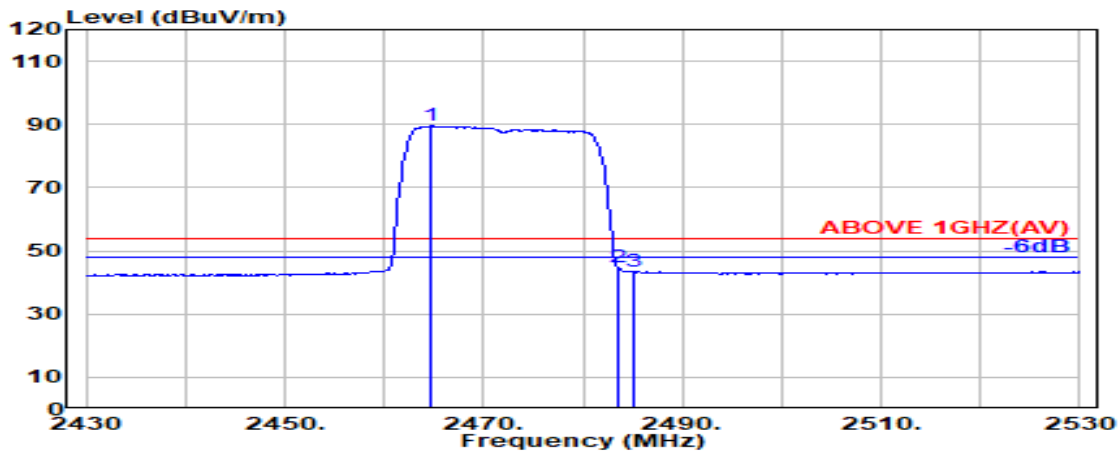


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2464.800	28.33	5.81	39.87	95.22	89.49	---	---	Average
2483.500	28.37	5.83	39.87	50.43	44.75	54.00	9.25	Average
@ 2485.200	28.37	5.83	39.87	49.15	43.48	54.00	10.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

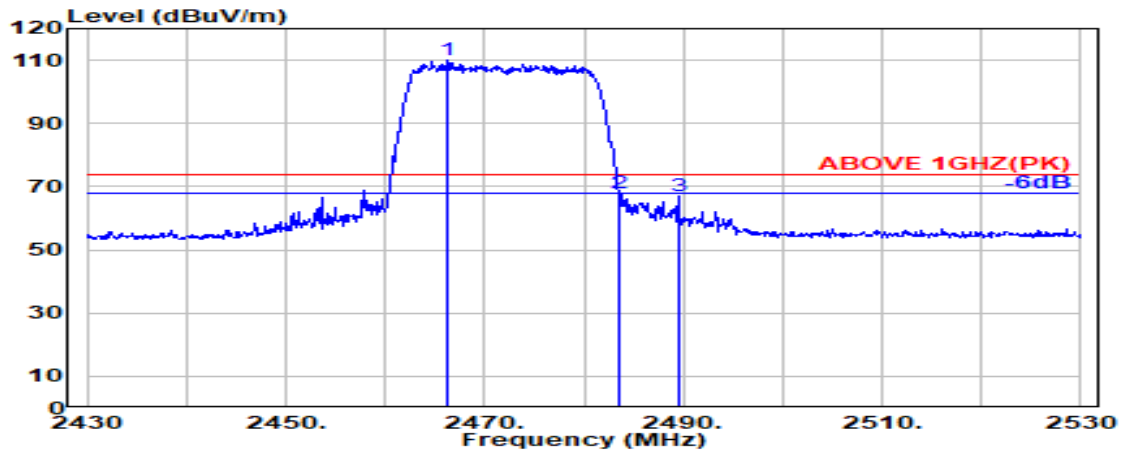

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2466.200	28.33	5.81	39.87	115.73	110.00	---	---	Peak
2483.500	28.37	5.83	39.87	73.54	67.87	74.00	6.13	Peak
@ 2489.500	28.38	5.84	39.87	72.64	66.99	74.00	7.01	Peak

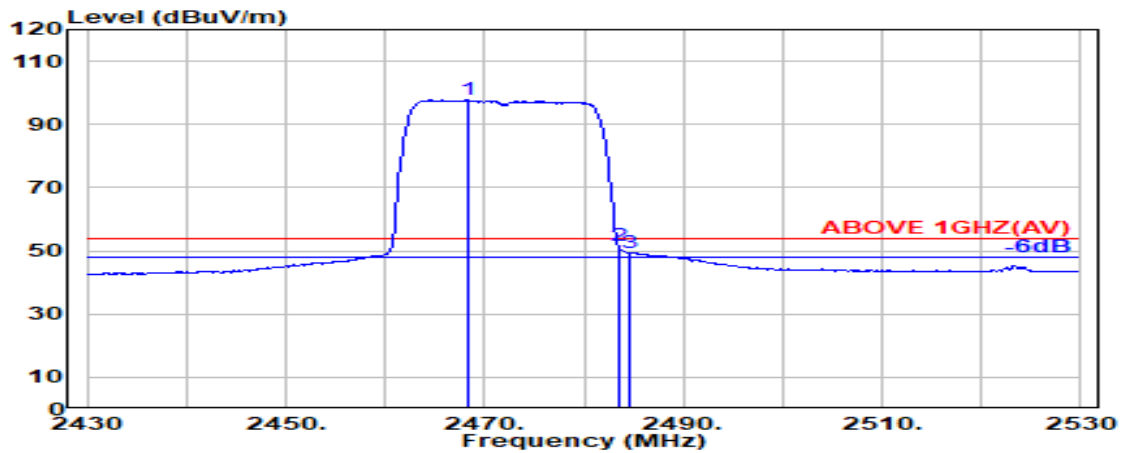


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2468.300	28.34	5.81	39.87	103.42	97.70	---	---	Average
2483.500	28.37	5.83	39.87	57.31	51.64	54.00	2.36	Average
@ 2484.700	28.37	5.83	39.87	55.24	49.57	54.00	4.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

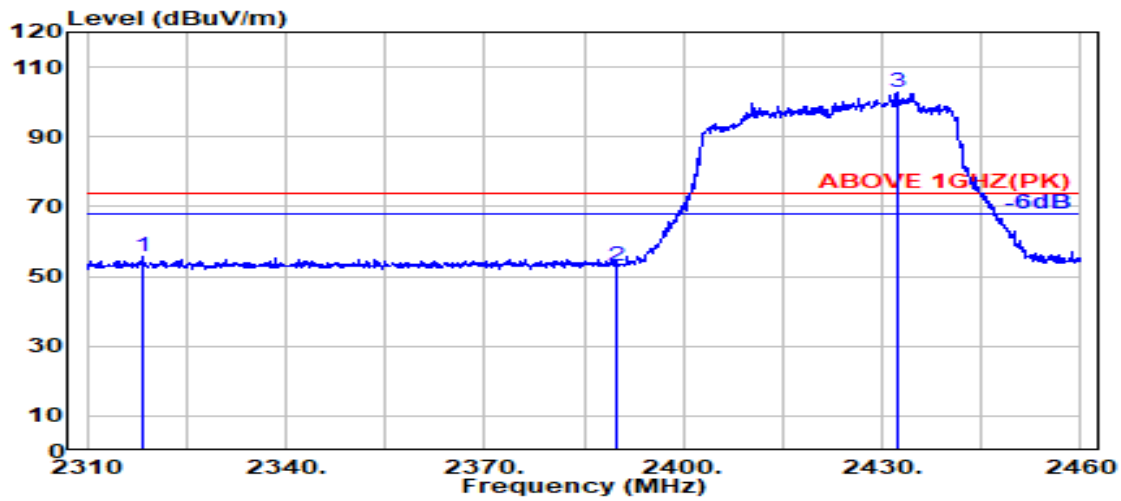

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2318.400	28.11	5.63	39.88	61.62	55.49	74.00	18.51	Peak
2390.000	28.14	5.72	39.88	58.93	52.91	74.00	21.09	Peak
@ 2432.200	28.23	5.77	39.87	108.81	102.94	---	---	Peak

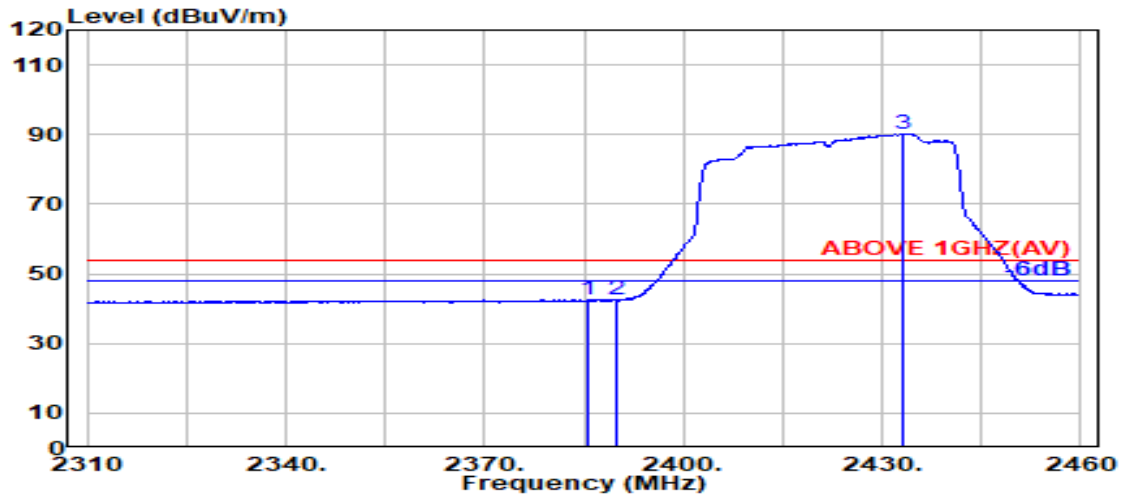


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	28.16	5.72	39.88	48.72	42.72	54.00	11.28	Average
2390.000	28.14	5.72	39.88	48.42	42.40	54.00	11.60	Average
@ 2433.000	28.23	5.77	39.87	96.20	90.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

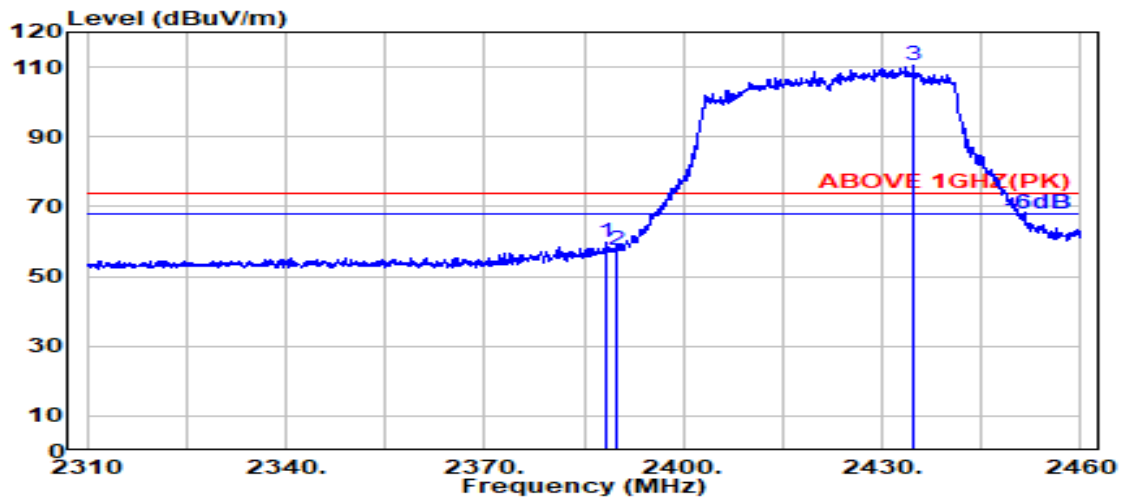

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	65.68	59.66	74.00	14.34	Peak
2390.000	28.14	5.72	39.88	63.56	57.55	74.00	16.45	Peak
@ 2434.800	28.24	5.77	39.87	116.33	110.47	---	---	Peak

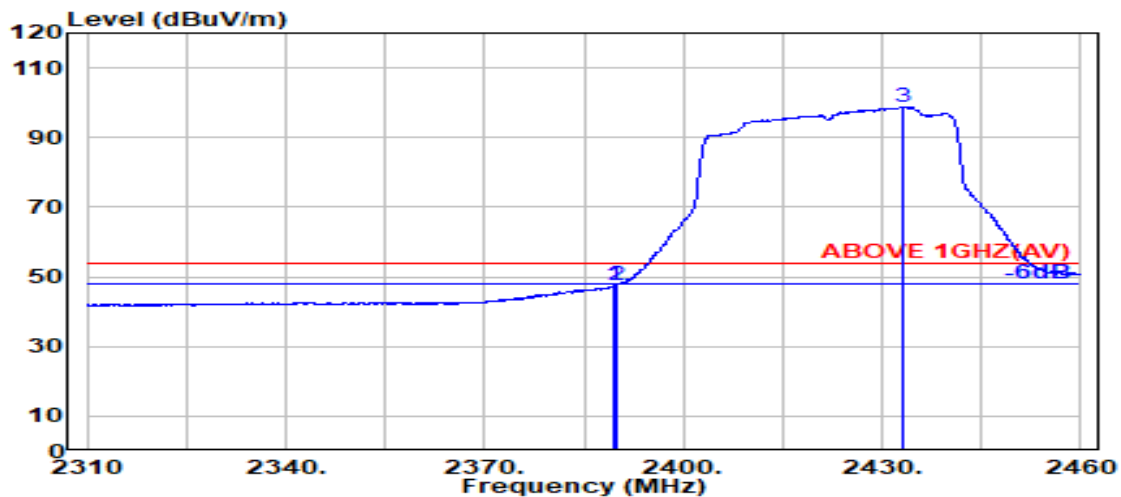


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	53.39	47.38	54.00	6.62	Average
2390.000	28.14	5.72	39.88	53.63	47.61	54.00	6.39	Average
@ 2433.100	28.23	5.77	39.87	104.72	98.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

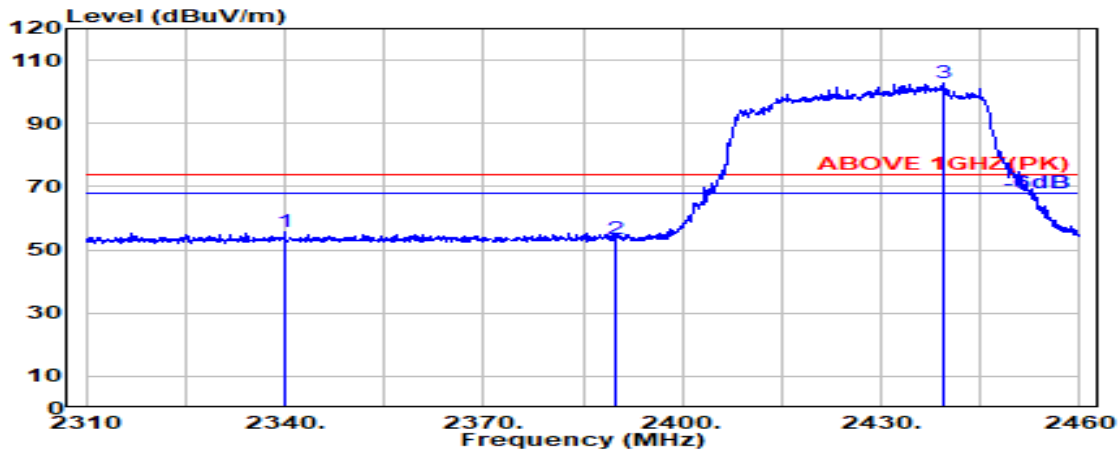

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2340.100	28.24	5.66	39.88	61.46	55.48	74.00	18.52	Peak
2390.000	28.14	5.72	39.88	59.40	53.38	74.00	20.62	Peak
2439.600	28.26	5.78	39.87	108.70	102.87	---	---	Peak

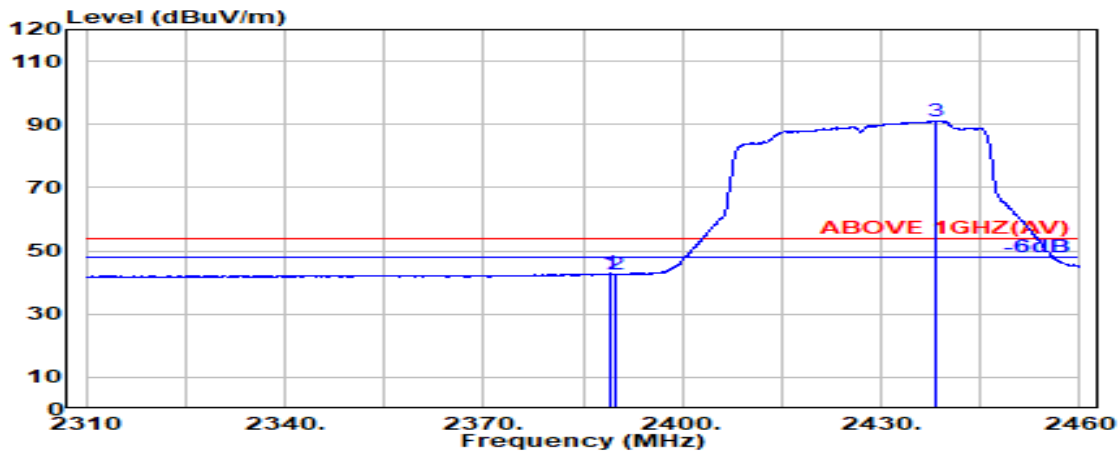


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2389.100	28.14	5.72	39.88	48.86	42.85	54.00	11.15	Average
2390.000	28.14	5.72	39.88	48.62	42.60	54.00	11.40	Average
2438.300	28.25	5.78	39.87	97.03	91.18	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

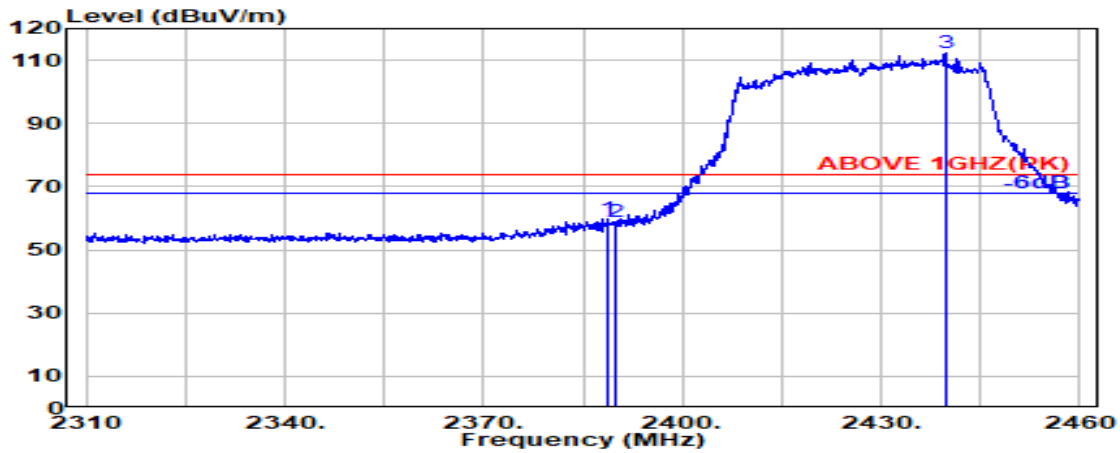

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2388.700	28.14	5.72	39.88	65.62	59.61	74.00	14.39	Peak
2390.000	28.14	5.72	39.88	64.86	58.84	74.00	15.16	Peak
2439.700	28.26	5.78	39.87	118.00	112.17	---	---	Peak

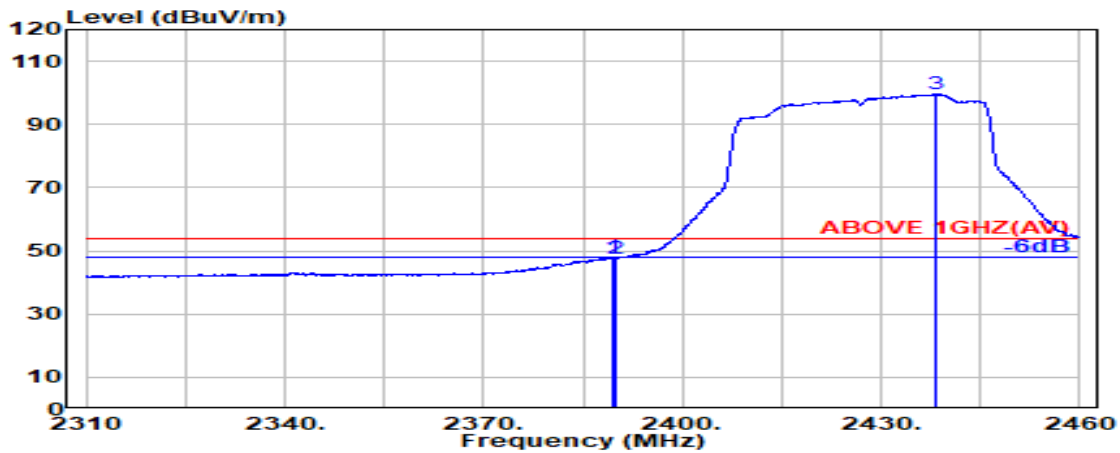


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2389.600	28.14	5.72	39.88	53.98	47.96	54.00	6.04	Average
2390.000	28.14	5.72	39.88	53.68	47.67	54.00	6.33	Average
2438.100	28.25	5.78	39.87	105.53	99.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

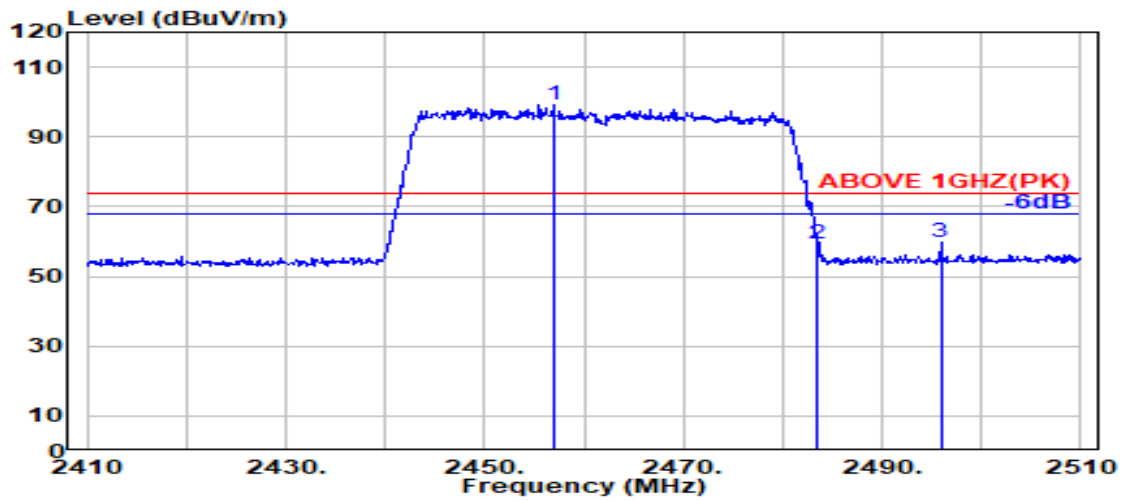

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	28.31	5.80	39.87	104.99	99.23	---	---	Peak
2483.500	28.37	5.83	39.87	65.08	59.40	74.00	14.60	Peak
2495.900	28.39	5.85	39.87	65.41	59.78	74.00	14.22	Peak

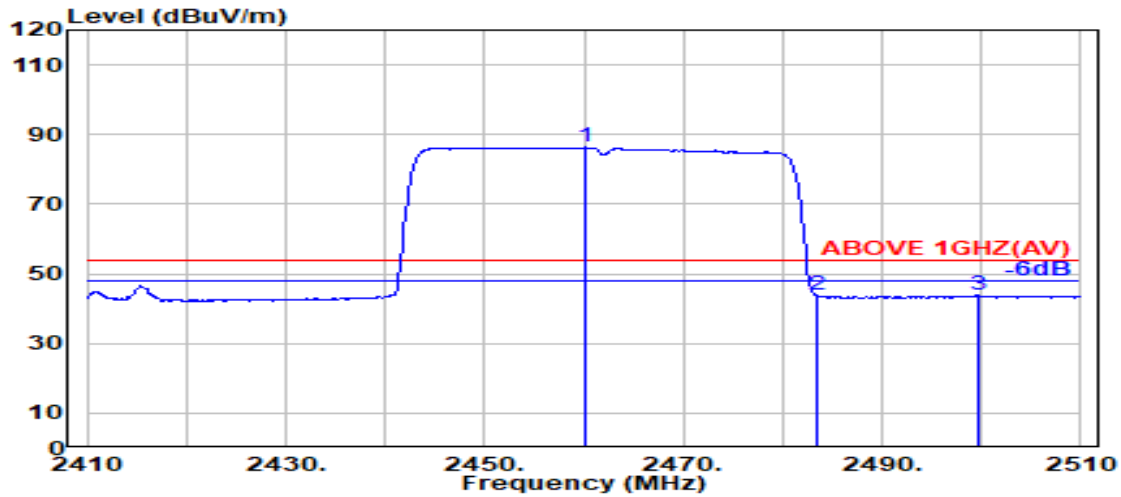


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.32	5.80	39.87	92.02	86.27	---	---	Average
2483.500	28.37	5.83	39.87	49.37	43.70	54.00	10.30	Average
2499.700	28.40	5.85	39.87	49.40	43.78	54.00	10.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

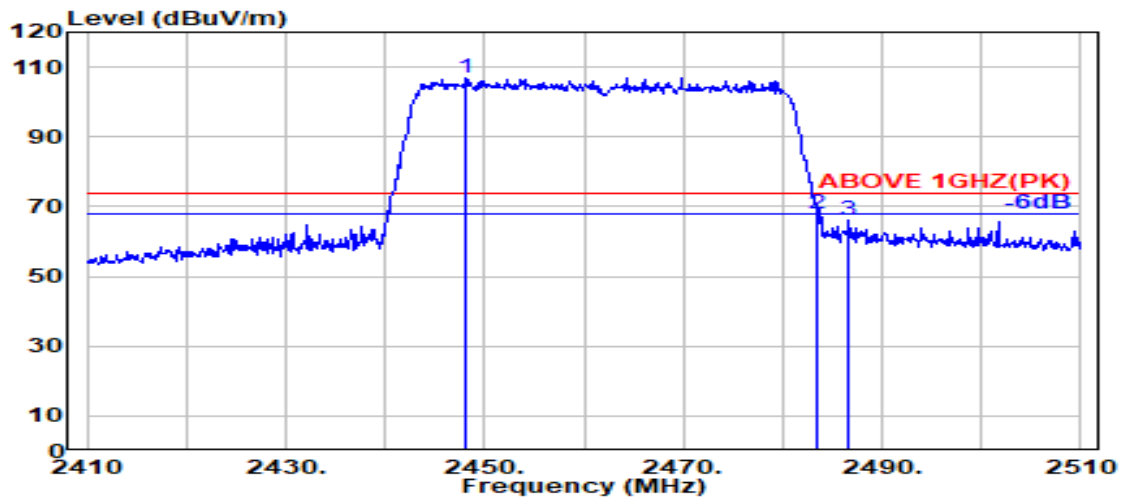

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.100	28.29	5.79	39.87	112.88	107.09	---	---	Peak
2483.500	28.37	5.83	39.87	73.42	67.74	74.00	6.26	Peak
2486.600	28.37	5.83	39.87	71.65	65.98	74.00	8.02	Peak

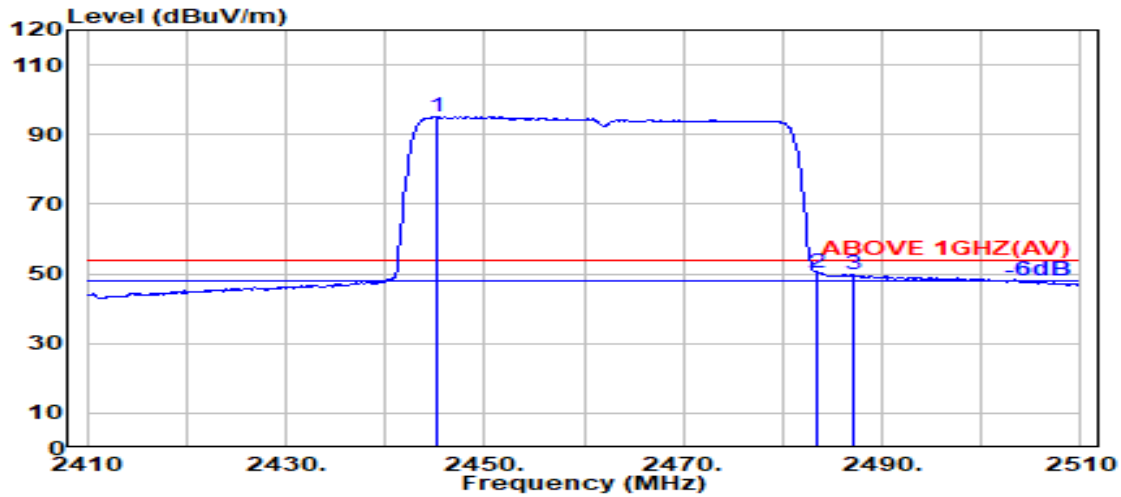


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.300	28.28	5.79	39.87	100.88	95.07	---	---	Average
2483.500	28.37	5.83	39.87	56.07	50.40	54.00	3.60	Average
2487.200	28.37	5.84	39.87	55.32	49.65	54.00	4.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
------	----------------	-----------	-------------

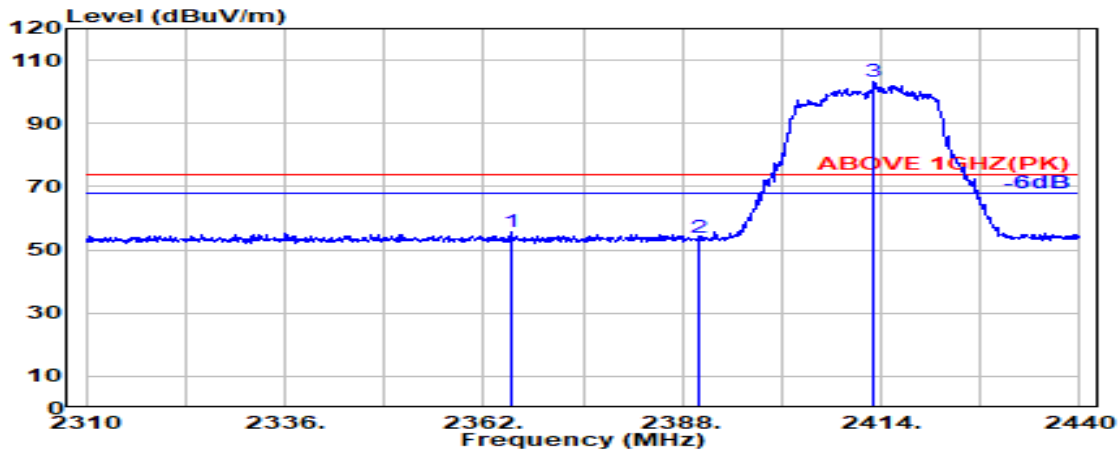

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.500	28.24	5.69	39.88	61.64	55.69	74.00	18.31	Peak
2390.000	28.14	5.72	39.88	60.10	54.08	74.00	19.92	Peak
@ 2413.100	28.15	5.75	39.88	109.22	103.25	---	---	Peak

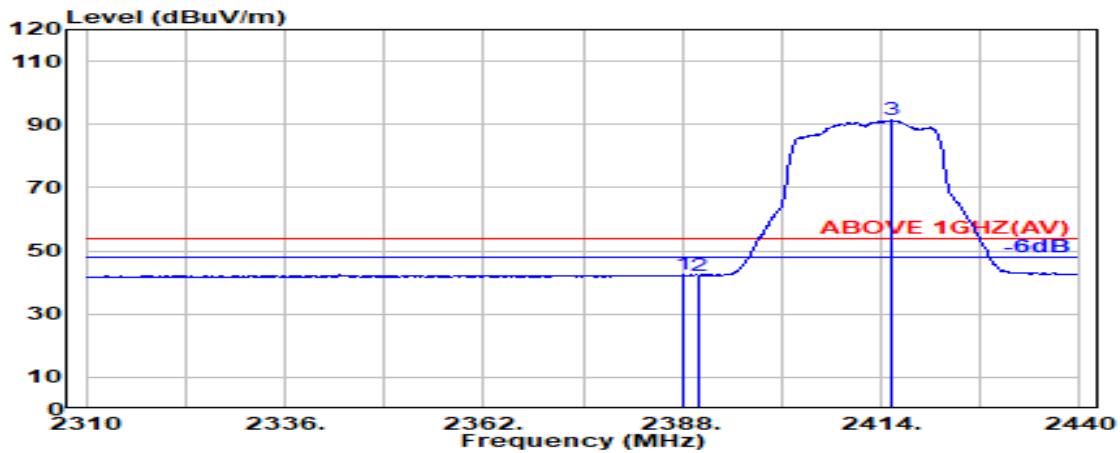


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.100	28.15	5.72	39.88	48.42	42.40	54.00	11.60	Average
2390.000	28.14	5.72	39.88	48.22	42.20	54.00	11.80	Average
@ 2415.500	28.16	5.75	39.88	97.35	91.38	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
------	----------------	-----------	-------------

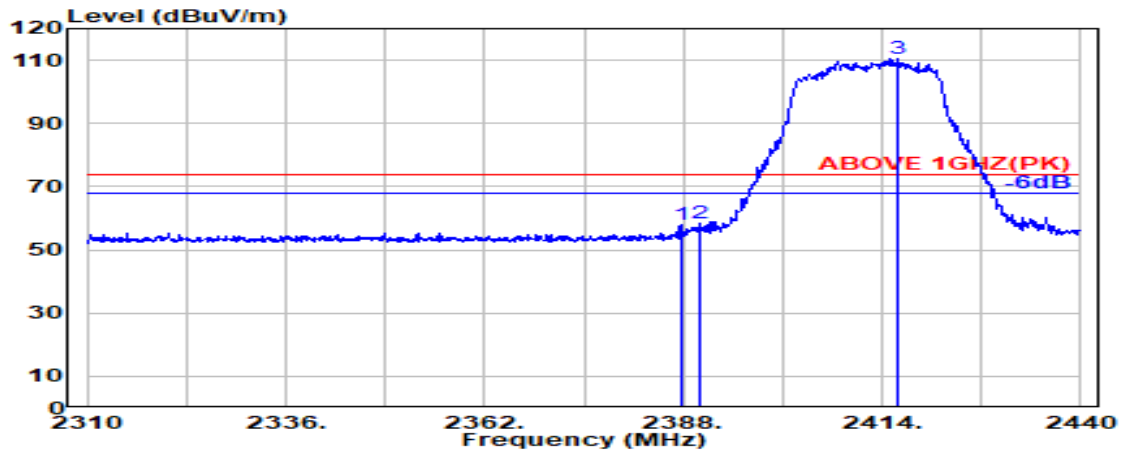

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.15	5.72	39.88	63.77	57.75	74.00	16.25	Peak
2390.000	28.14	5.72	39.88	64.40	58.38	74.00	15.62	Peak
@ 2416.000	28.16	5.75	39.88	116.60	110.64	---	---	Peak

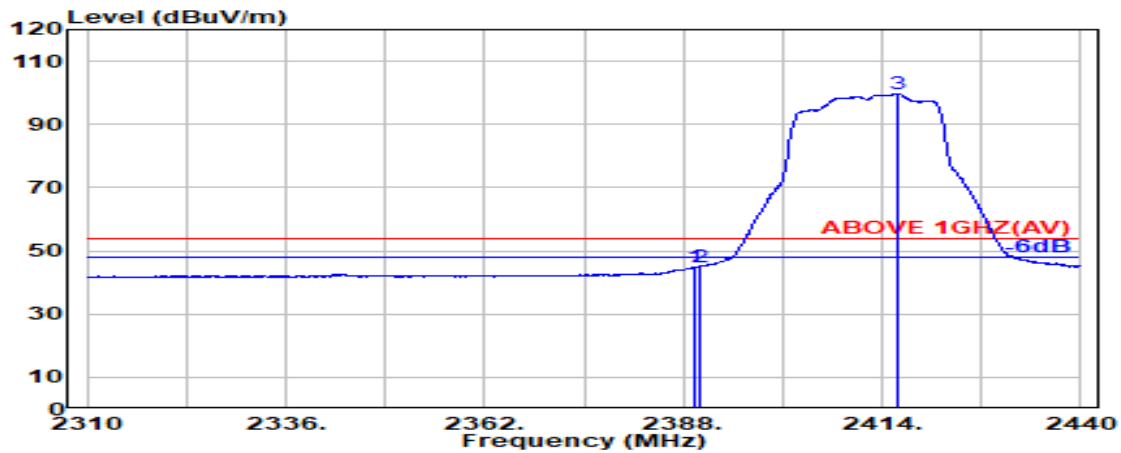


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	50.94	44.92	54.00	9.08	Average
2390.000	28.14	5.72	39.88	50.63	44.62	54.00	9.38	Average
@ 2415.900	28.16	5.75	39.88	105.51	99.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2417 MHz
------	----------------	-----------	-------------

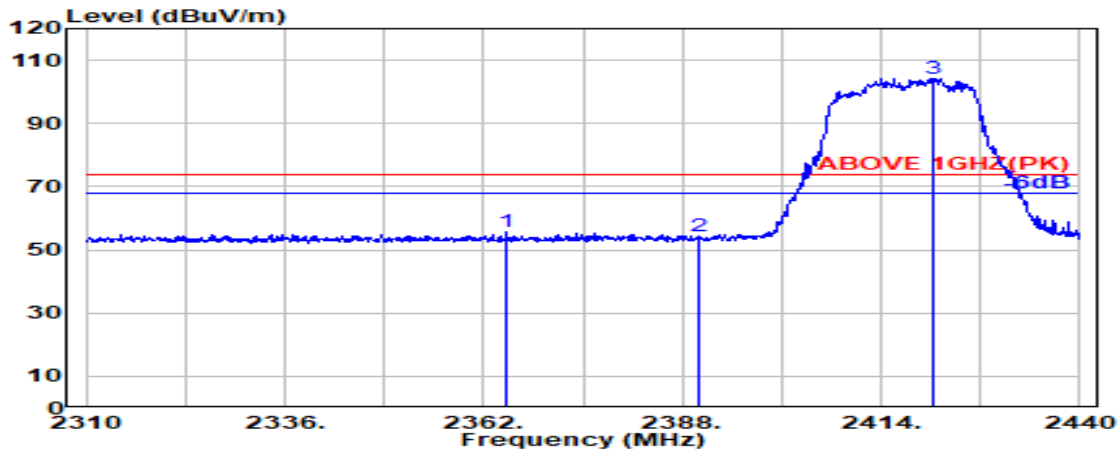

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.100	28.24	5.69	39.88	61.69	55.74	74.00	18.26	Peak
2390.000	28.14	5.72	39.88	60.14	54.12	74.00	19.88	Peak
@ 2420.800	28.18	5.76	39.88	110.22	104.28	---	---	Peak

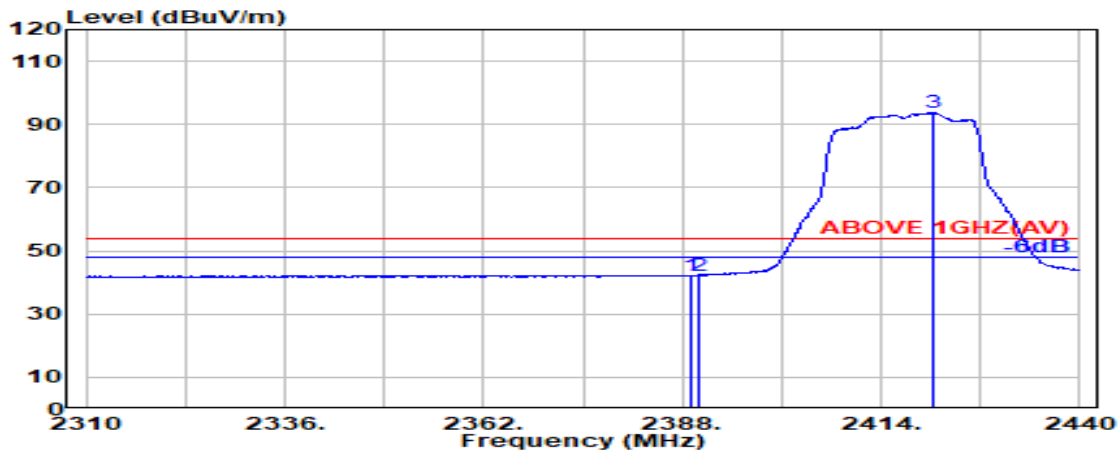


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	48.35	42.33	54.00	11.67	Average
2390.000	28.14	5.72	39.88	48.20	42.18	54.00	11.82	Average
@ 2420.700	28.18	5.76	39.88	99.58	93.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2417 MHz
------	----------------	-----------	-------------

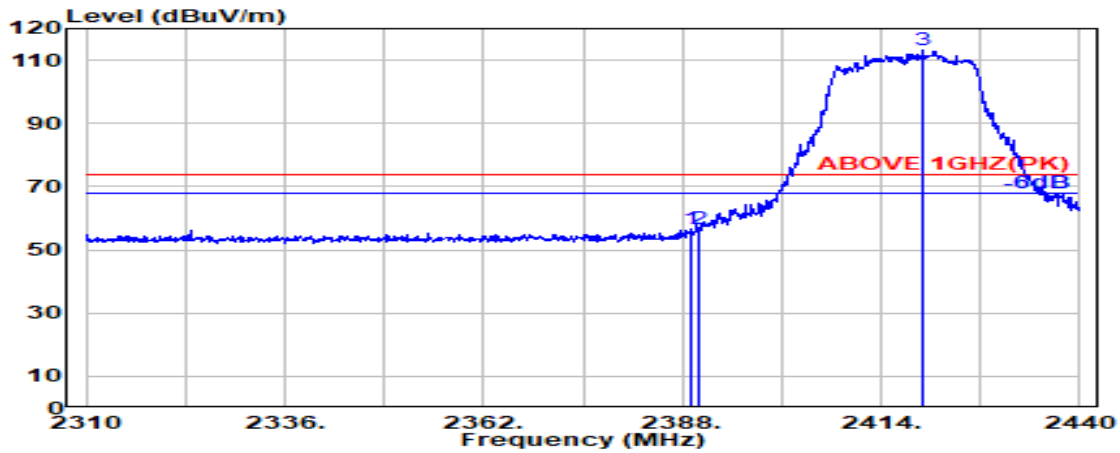

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	62.39	56.38	74.00	17.62	Peak
2390.000	28.14	5.72	39.88	62.77	56.75	74.00	17.25	Peak
@ 2419.600	28.18	5.76	39.88	119.00	113.06	---	---	Peak

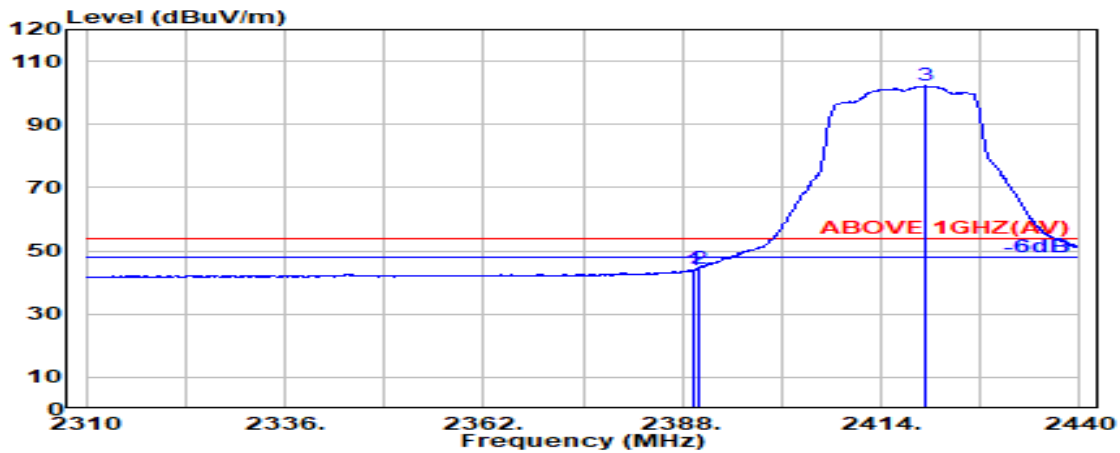


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	50.10	44.09	54.00	9.91	Average
2390.000	28.14	5.72	39.88	50.57	44.55	54.00	9.45	Average
@ 2419.700	28.18	5.76	39.88	108.07	102.13	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
------	----------------	-----------	-------------

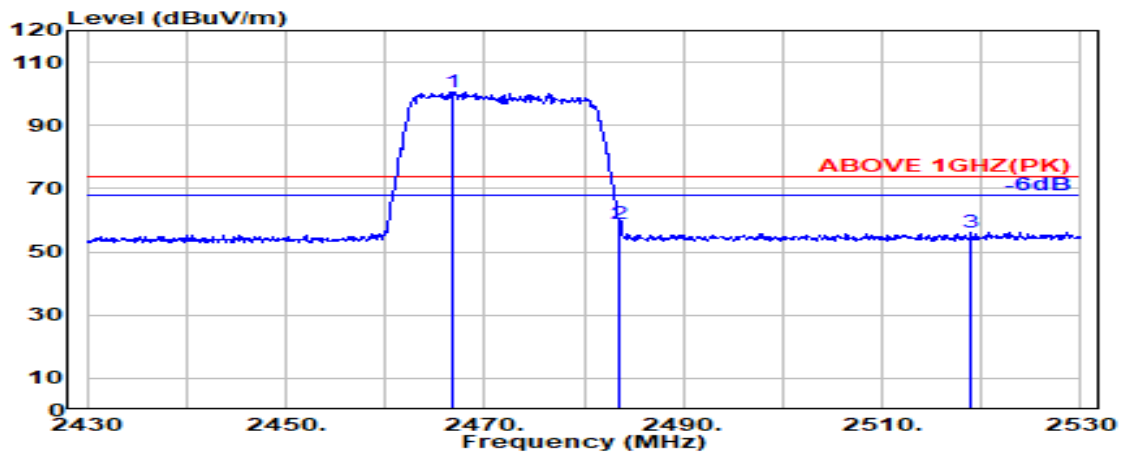

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2466.800	28.33	5.81	39.87	106.35	100.62	---	---	Peak
2483.500	28.37	5.83	39.87	64.76	59.09	74.00	14.91	Peak
@ 2519.000	28.51	5.87	39.88	61.80	56.31	74.00	17.69	Peak

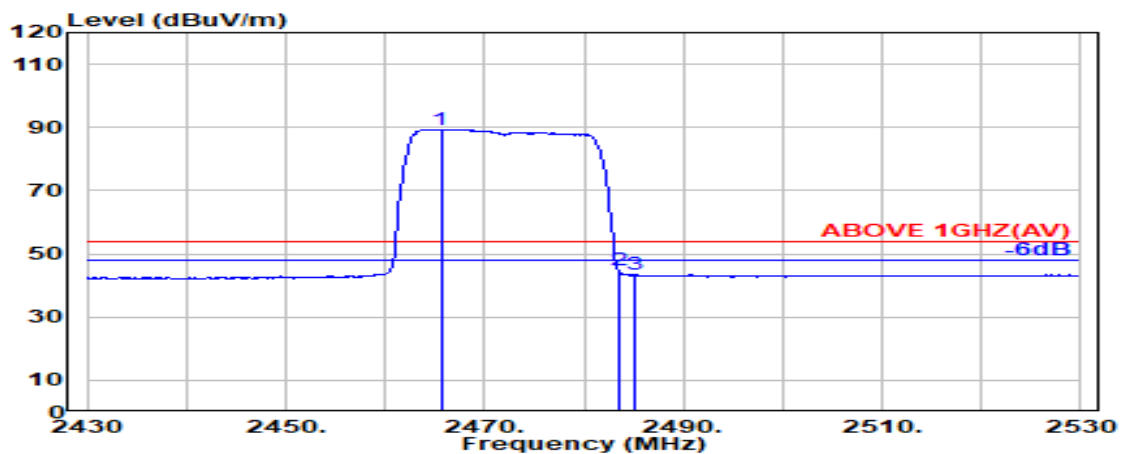


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2465.600	28.33	5.81	39.87	95.16	89.43	---	---	Average
2483.500	28.37	5.83	39.87	50.28	44.61	54.00	9.39	Average
@ 2485.000	28.37	5.83	39.87	49.18	43.51	54.00	10.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

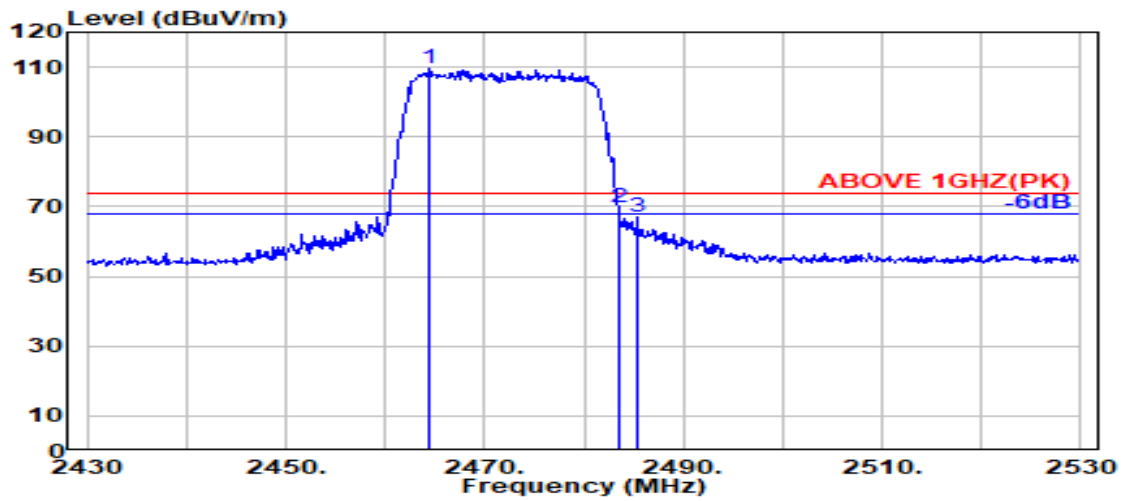

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.33	5.81	39.87	115.35	109.61	---	---	Peak
2483.500	28.37	5.83	39.87	75.28	69.61	74.00	4.39	Peak
2485.400	28.37	5.83	39.87	72.72	67.05	74.00	6.95	Peak

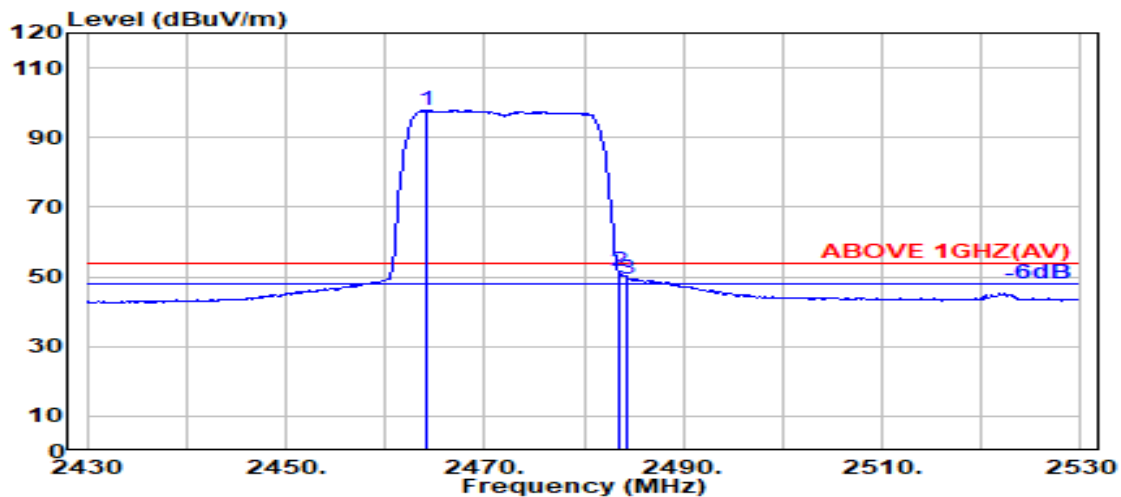


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.33	5.81	39.87	103.45	97.72	---	---	Average
2483.500	28.37	5.83	39.87	57.33	51.65	54.00	2.35	Average
2484.400	28.37	5.83	39.87	55.25	49.58	54.00	4.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

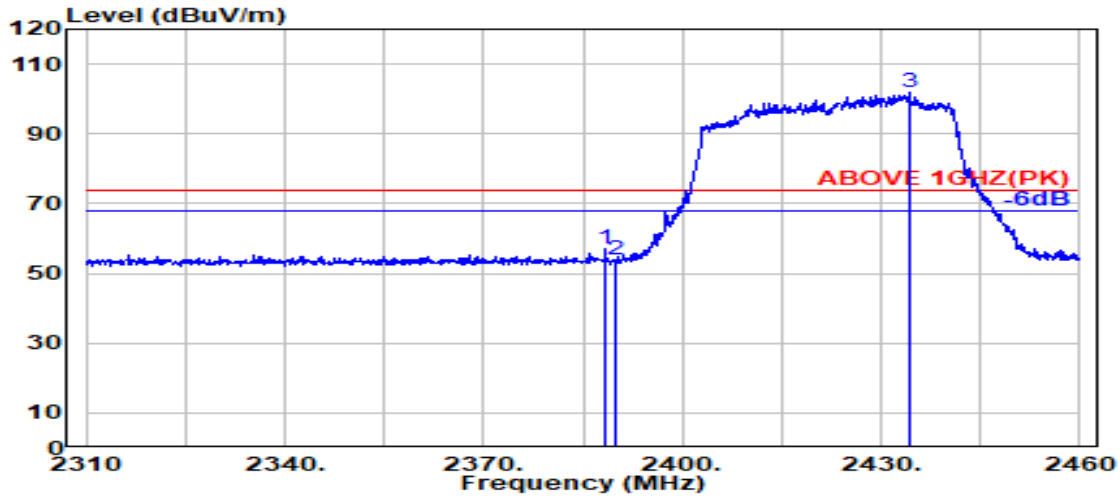

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	62.85	56.83	74.00	17.17	Peak
2390.000	28.14	5.72	39.88	59.99	53.98	74.00	20.02	Peak
@ 2434.200	28.24	5.77	39.87	107.59	101.73	---	---	Peak

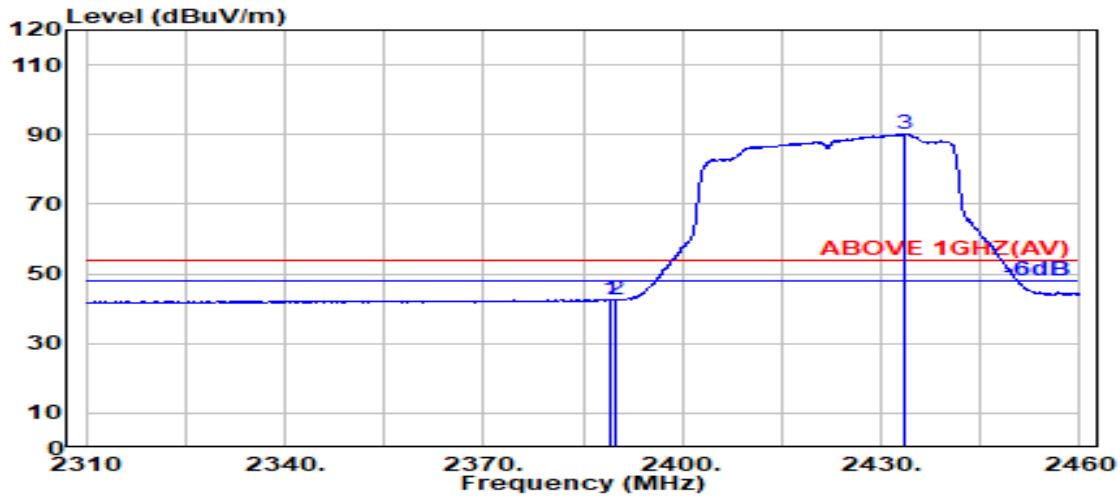


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	48.67	42.65	54.00	11.35	Average
2390.000	28.14	5.72	39.88	48.44	42.42	54.00	11.58	Average
@ 2433.600	28.23	5.77	39.87	96.01	90.15	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

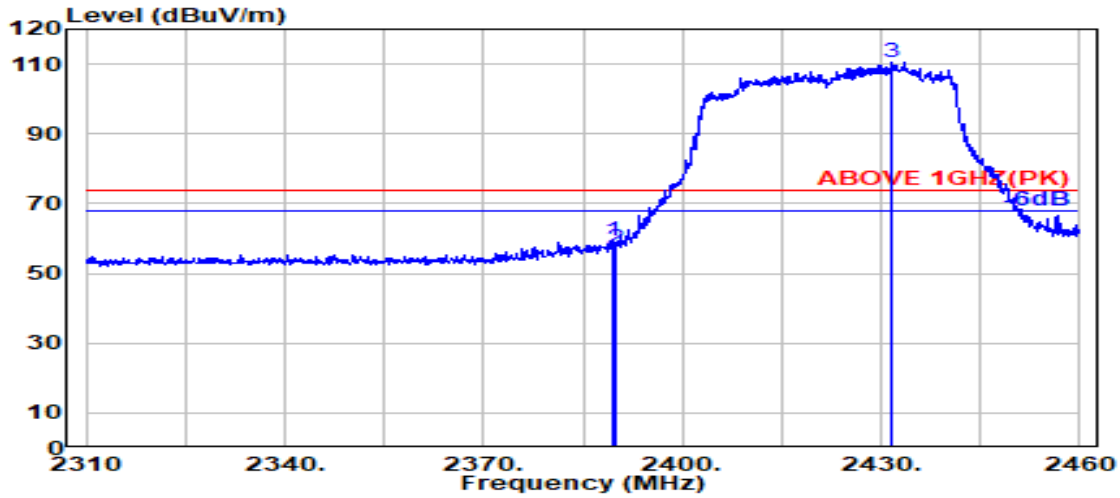

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	65.29	59.27	74.00	14.73	Peak
2390.000	28.14	5.72	39.88	63.29	57.27	74.00	16.73	Peak
@ 2431.700	28.23	5.77	39.87	116.22	110.34	---	---	Peak

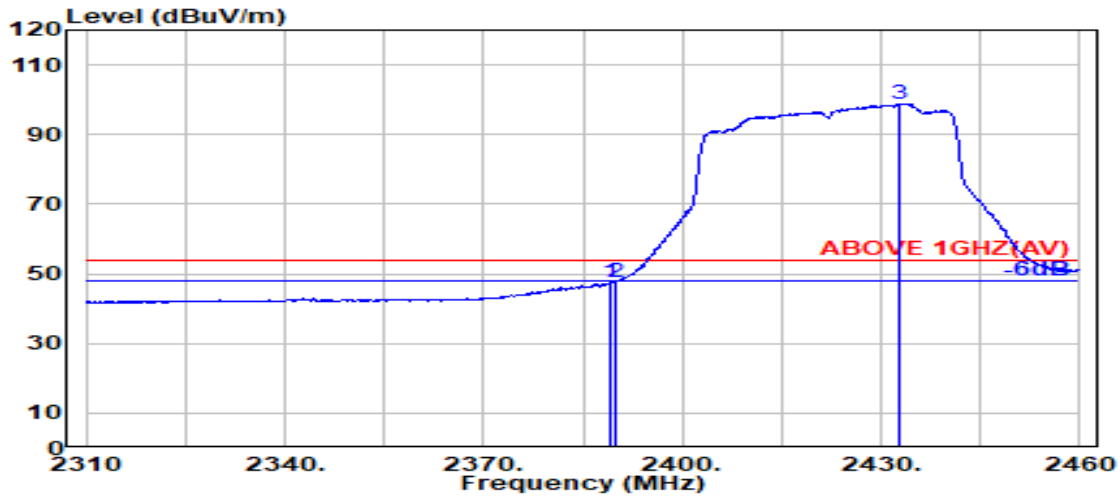


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	53.70	47.68	54.00	6.32	Average
2390.000	28.14	5.72	39.88	53.79	47.77	54.00	6.23	Average
@ 2432.700	28.23	5.77	39.87	104.80	98.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

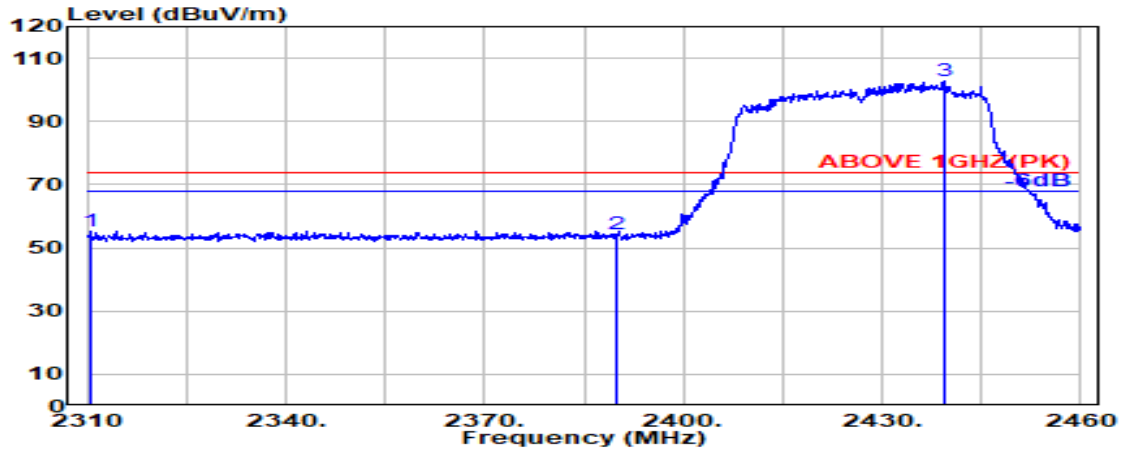

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2310.500	28.06	5.62	39.88	61.65	55.46	74.00	18.54	Peak
2390.000	28.14	5.72	39.88	60.37	54.35	74.00	19.65	Peak
2439.300	28.26	5.78	39.87	108.47	102.63	---	---	Peak

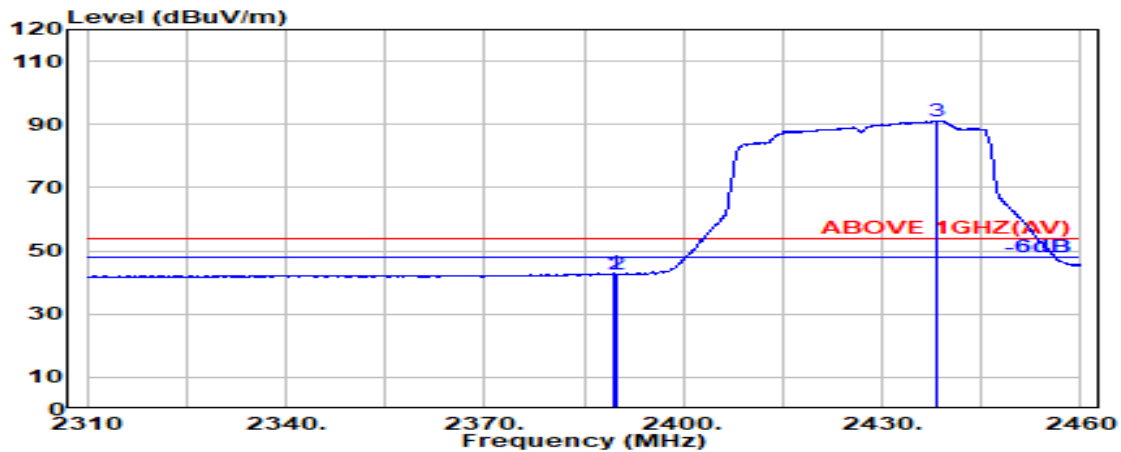


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2389.600	28.14	5.72	39.88	48.84	42.82	54.00	11.18	Average
2390.000	28.14	5.72	39.88	48.69	42.68	54.00	11.32	Average
2438.400	28.25	5.78	39.87	96.92	91.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

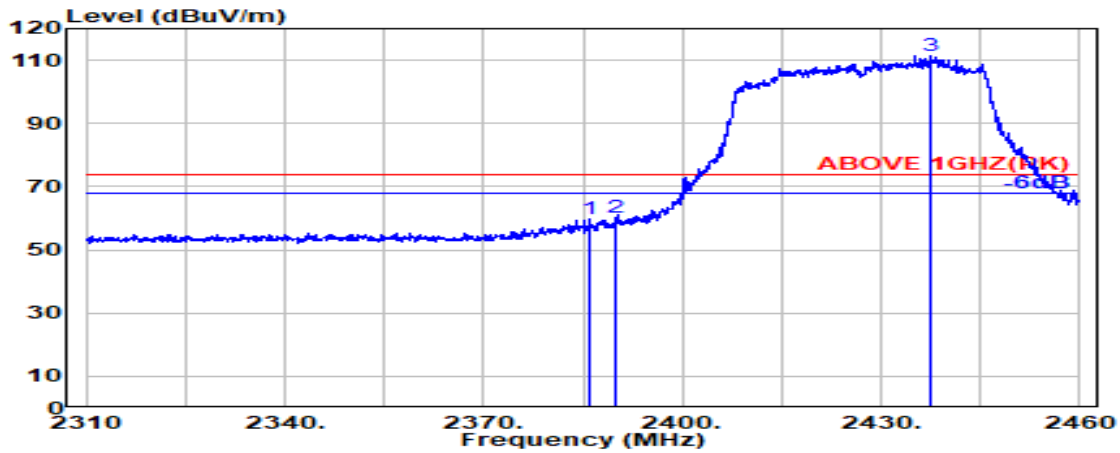

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2385.900	28.16	5.72	39.88	65.70	59.69	74.00	14.31	Peak
2390.000	28.14	5.72	39.88	66.06	60.04	74.00	13.96	Peak
2437.400	28.25	5.78	39.87	117.30	111.46	---	---	Peak

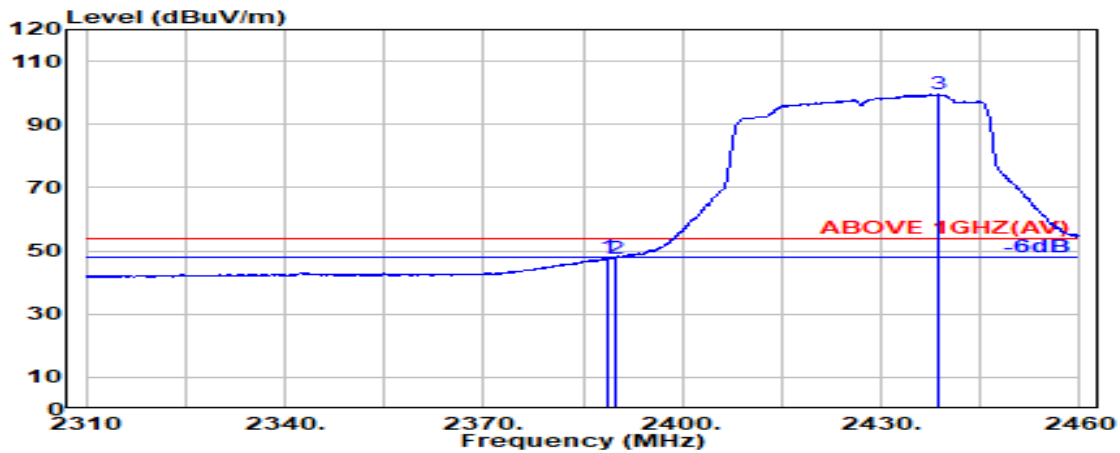


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2388.900	28.14	5.72	39.88	53.94	47.92	54.00	6.08	Average
2390.000	28.14	5.72	39.88	53.67	47.65	54.00	6.35	Average
2438.700	28.26	5.78	39.87	105.25	99.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

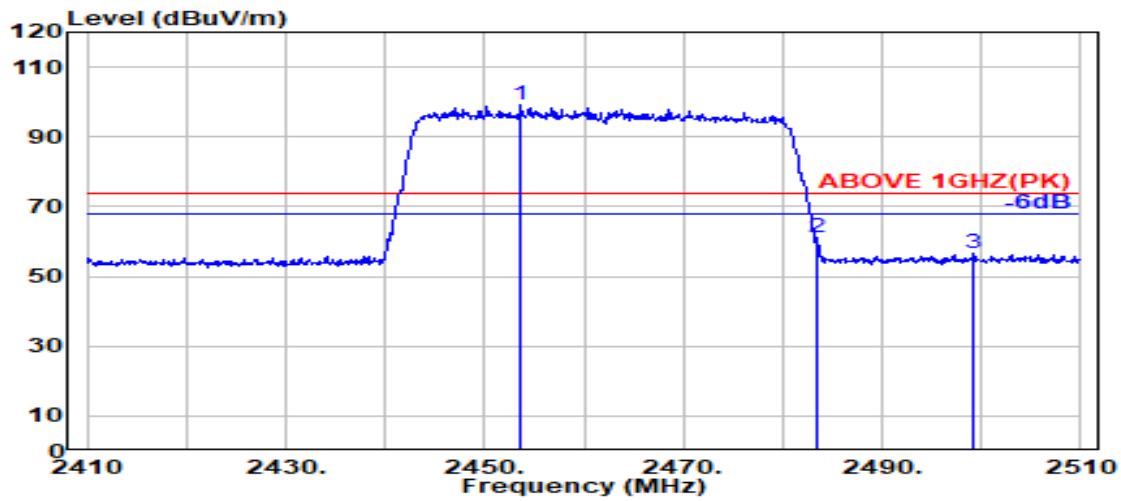

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.600	28.31	5.80	39.87	105.07	99.30	---	---	Peak
2483.500	28.37	5.83	39.87	66.76	61.08	74.00	12.92	Peak
2499.200	28.40	5.85	39.87	62.00	56.38	74.00	17.62	Peak

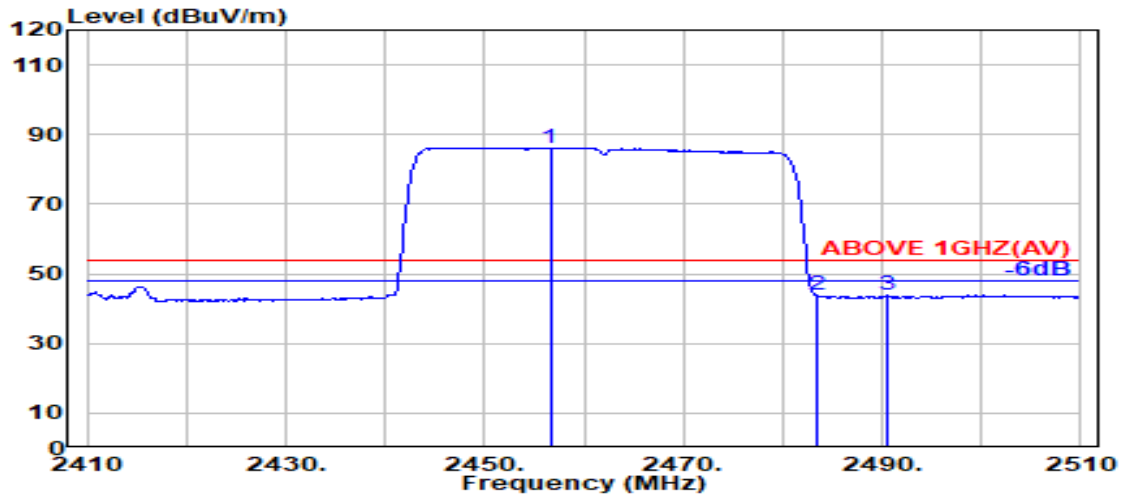


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.600	28.31	5.80	39.87	92.02	86.26	---	---	Average
2483.500	28.37	5.83	39.87	49.52	43.85	54.00	10.15	Average
2490.500	28.38	5.84	39.87	49.54	43.89	54.00	10.11	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

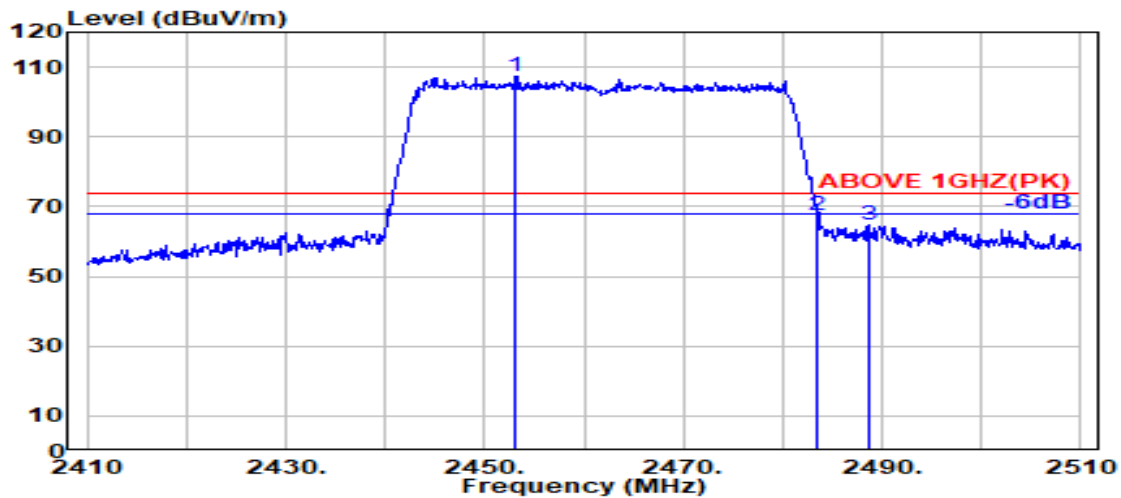

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.100	28.31	5.80	39.87	112.91	107.14	---	---	Peak
2483.500	28.37	5.83	39.87	73.03	67.35	74.00	6.65	Peak
2488.700	28.38	5.84	39.87	70.37	64.71	74.00	9.29	Peak

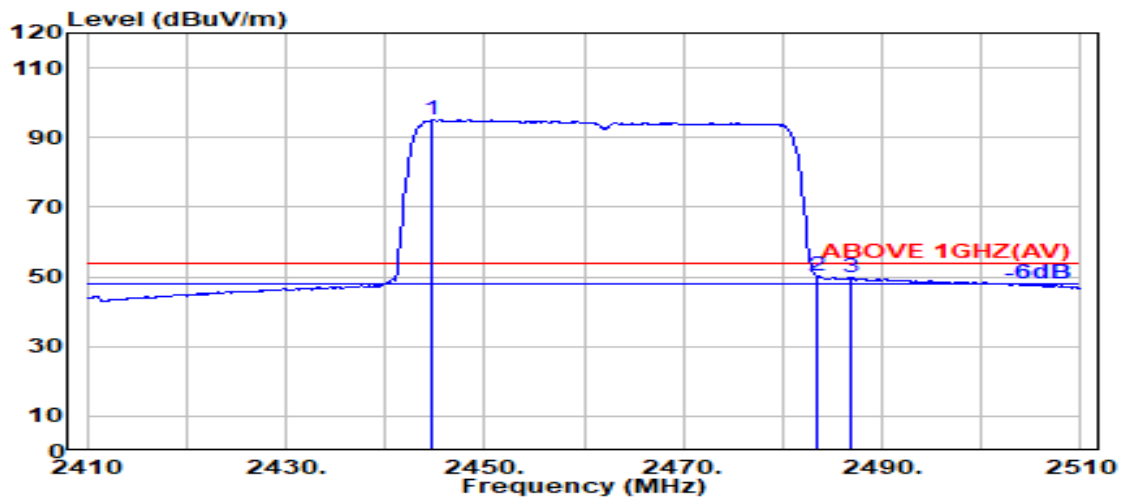

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.800	28.28	5.79	39.87	100.92	95.11	---	---	Average
2483.500	28.37	5.83	39.87	55.91	50.24	54.00	3.76	Average
2486.800	28.37	5.83	39.87	55.51	49.85	54.00	4.15	Average

Remark: The "@" means fundamental frequency, it is ignored in this section