


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	273
A.2.3 Emissions in Non-restricted Frequency Bands.....	296
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	297
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	297
A.3.2 Measurement Plots	322
A.4 POWER SPECTRAL DENSITY	363
A.4.1 Power Spectral Density Result	363
A.4.2 Measurement Plots	386
A.5 FREQUENCY STABILITY	413
A.5.1 Frequency stability Result	413

A.1 CONDUCTED EMISSION

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

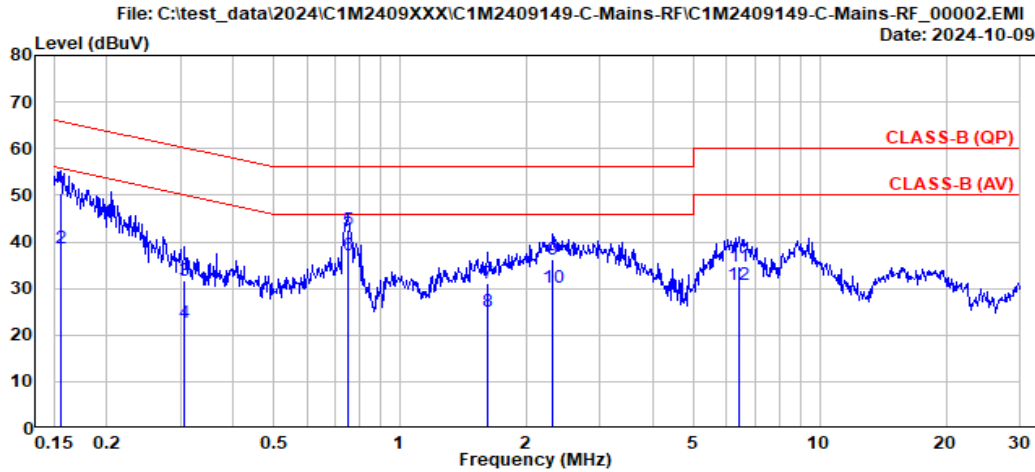

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	30.38	50.53	65.67	15.14	QP
2	0.156	10.27	0.03	9.85	18.58	38.73	55.67	16.94	Average
3	0.306	10.26	0.03	9.85	11.66	31.80	60.08	28.28	QP
4	0.306	10.26	0.03	9.85	2.58	22.72	50.08	27.36	Average
5	0.750	10.27	0.04	9.85	22.28	42.44	56.00	13.56	QP
6	0.750	10.27	0.04	9.85	16.93	37.09	46.00	8.91	Average
7	1.617	10.28	0.05	9.86	10.88	31.07	56.00	24.93	QP
8	1.617	10.28	0.05	9.86	4.95	25.14	46.00	20.86	Average
9	2.315	10.30	0.06	9.86	15.97	36.19	56.00	19.81	QP
10	2.315	10.30	0.06	9.86	9.96	30.18	46.00	15.82	Average
11	6.398	10.45	0.10	9.87	14.32	34.74	60.00	25.26	QP
12	6.398	10.45	0.10	9.87	10.24	30.66	50.00	19.34	Average

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

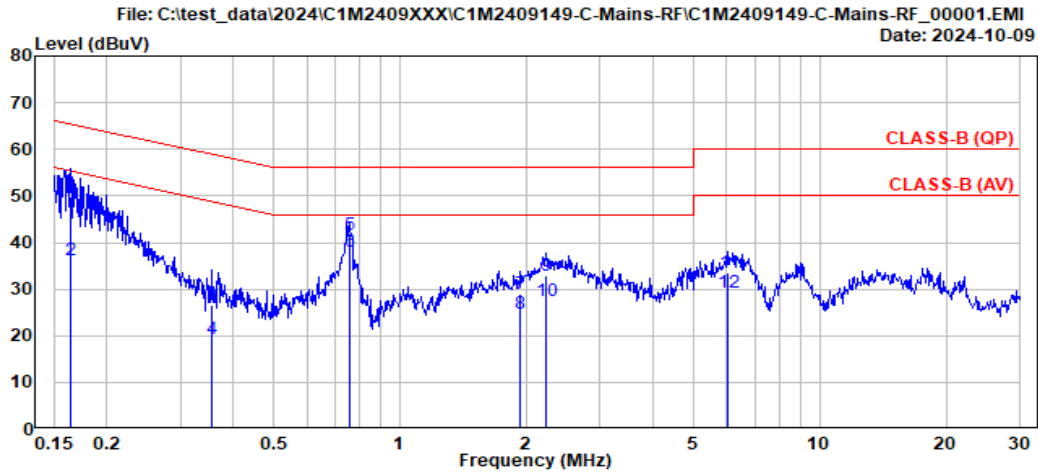

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/54%	Test Rating	: 110Vac/60Hz
EUT Model	: 17Z90TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.164	10.26	0.03	9.85	29.66	49.80	65.25	15.45	QP
2	0.164	10.26	0.03	9.85	16.08	36.22	55.25	19.03	Average
3	0.355	10.25	0.03	9.85	6.32	26.45	58.84	32.39	QP
4	0.355	10.25	0.03	9.85	-0.68	19.45	48.84	29.39	Average
5	0.758	10.26	0.04	9.85	21.58	41.73	56.00	14.27	QP
6	0.758	10.26	0.04	9.85	17.78	37.93	46.00	8.07	Average
7	1.934	10.27	0.06	9.86	8.79	28.98	56.00	27.02	QP
8	1.934	10.27	0.06	9.86	4.62	24.81	46.00	21.19	Average
9	2.235	10.28	0.06	9.86	12.71	32.91	56.00	23.09	QP
10	2.235	10.28	0.06	9.86	7.28	27.48	46.00	18.52	Average
11	6.057	10.37	0.10	9.87	13.05	33.39	60.00	26.61	QP
12	6.057	10.37	0.10	9.87	8.92	29.26	50.00	20.74	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/09/25~10/15	Temp./Hum.	23~24°C/51~59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.39	26.50	35.45	33.68	40.00	6.32	Peak
73.500	12.08	2.18	26.40	43.46	31.31	40.00	8.69	Peak
231.000	16.81	3.86	25.77	38.19	33.09	46.00	12.91	Peak
345.500	19.84	5.13	26.08	35.53	34.42	46.00	11.58	Peak
540.000	23.34	6.71	27.33	29.57	32.29	46.00	13.71	Peak
776.000	24.91	7.69	27.37	33.79	39.02	46.00	6.98	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
57.500	12.36	1.90	26.46	46.18	33.99	40.00	6.01	Peak
90.500	14.83	2.38	26.34	46.22	37.08	43.50	6.42	Peak
228.500	16.67	3.83	25.77	39.47	34.20	46.00	11.80	Peak
345.500	19.84	5.13	26.08	38.53	37.42	46.00	8.58	Peak
445.500	21.93	6.20	26.86	33.66	34.93	46.00	11.07	Peak
606.500	24.10	6.84	27.48	27.33	30.79	46.00	15.21	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

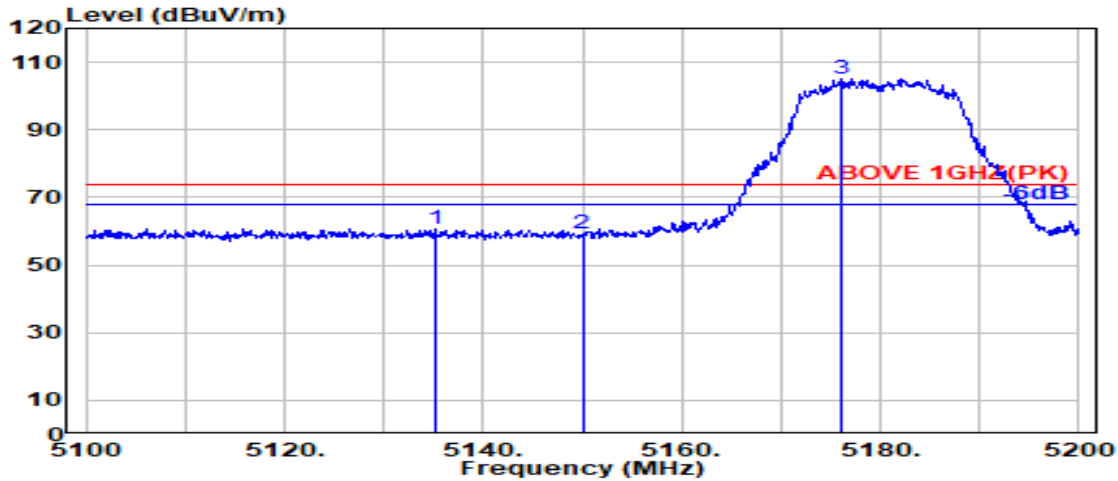

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.100	33.47	8.36	39.27	58.22	60.78	74.00	13.22	Peak
5150.000	33.50	8.37	39.27	56.93	59.54	74.00	14.46	Peak
@ 5176.100	33.66	8.40	39.27	102.46	105.25	---	---	Peak

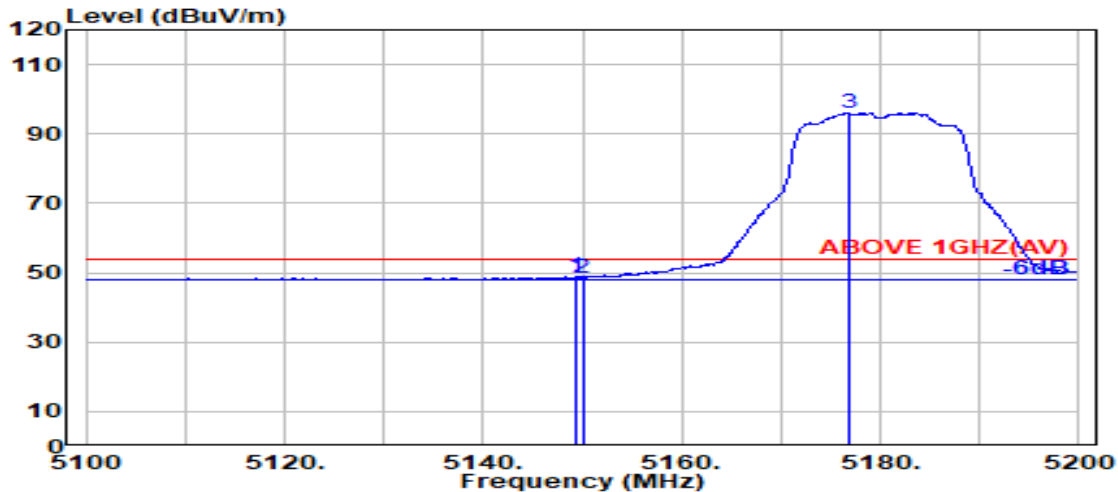


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.27	46.17	48.77	54.00	5.23	Average
5150.000	33.50	8.37	39.27	45.91	48.51	54.00	5.49	Average
@ 5176.900	33.66	8.40	39.27	93.18	95.98	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

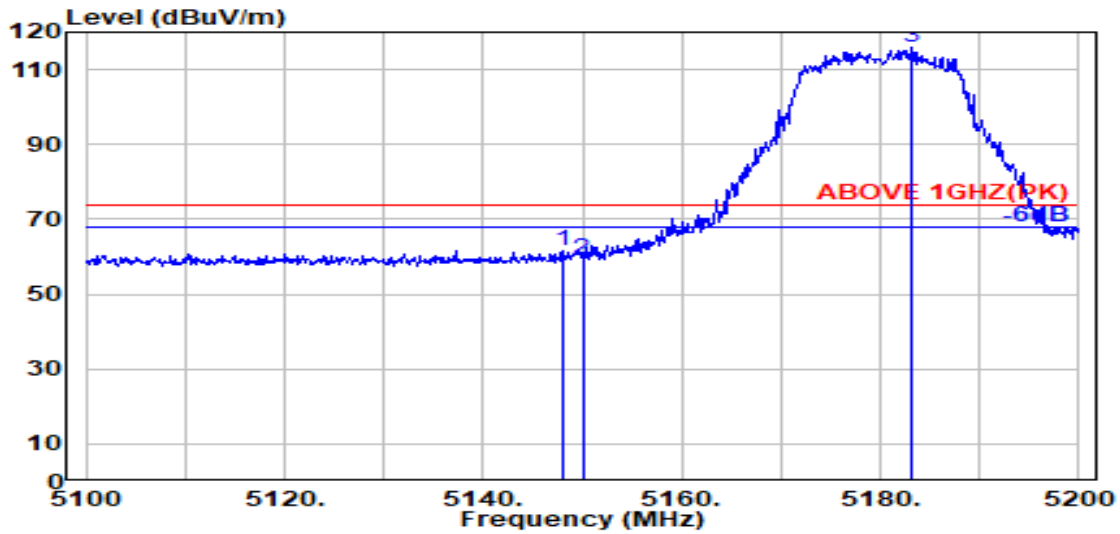

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.50	8.37	39.27	58.89	61.48	74.00	12.52	Peak
5150.000	33.50	8.37	39.27	56.88	59.48	74.00	14.52	Peak
@ 5183.200	33.70	8.41	39.27	112.94	115.78	---	---	Peak

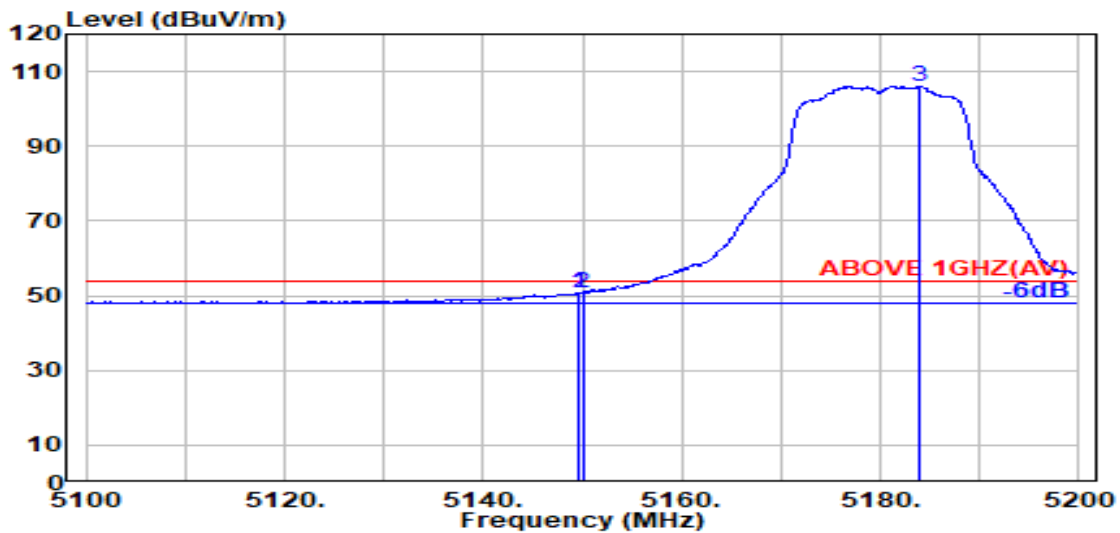


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.27	48.07	50.67	54.00	3.33	Average
5150.000	33.50	8.37	39.27	48.08	50.69	54.00	3.31	Average
@ 5183.900	33.70	8.41	39.27	103.25	106.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

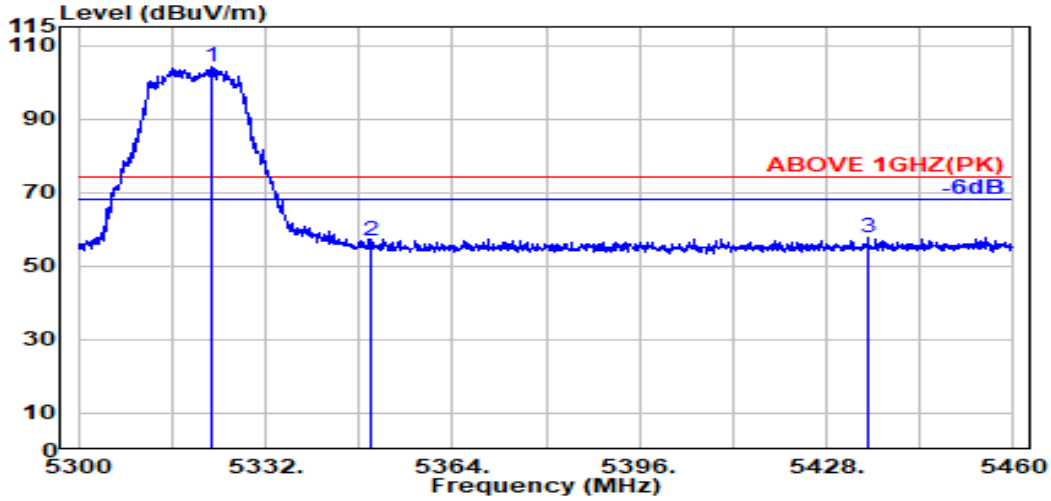

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	33.75	8.55	39.26	101.07	104.11	---	---	Peak
5350.000	33.70	8.57	39.26	53.68	56.69	74.00	17.31	Peak
5435.200	33.97	8.65	39.25	54.30	57.68	74.00	16.32	Peak

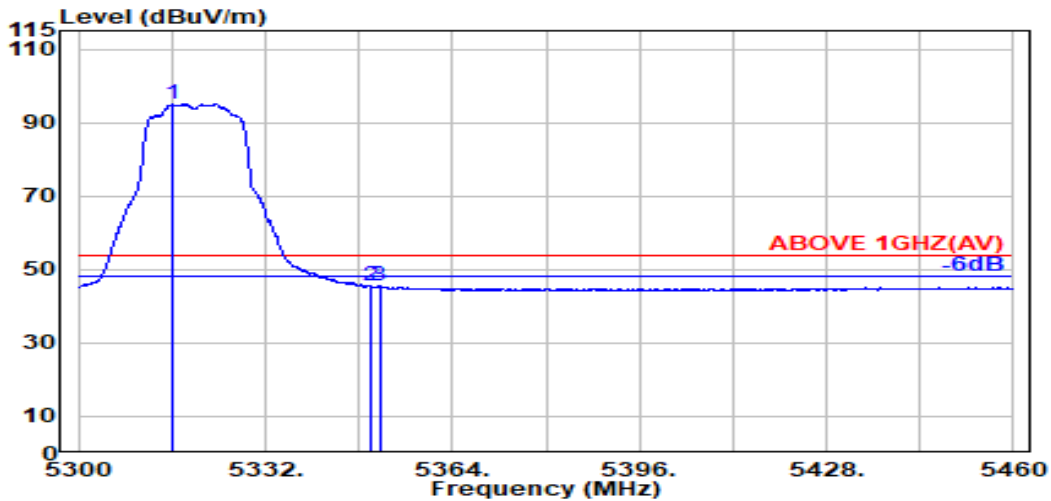


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.26	91.99	95.04	---	---	Average
5350.000	33.70	8.57	39.26	42.38	45.40	54.00	8.60	Average
5351.500	33.71	8.57	39.26	42.46	45.48	54.00	8.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

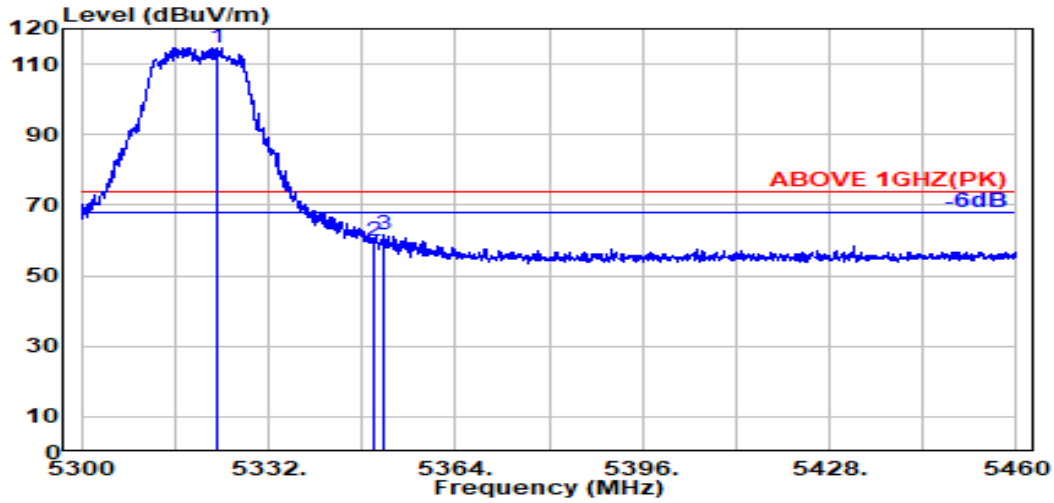

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	33.75	8.55	39.26	111.71	114.75	---	---	Peak
5350.000	33.70	8.57	39.26	56.57	59.58	74.00	14.42	Peak
5351.700	33.71	8.57	39.26	58.37	61.39	74.00	12.61	Peak

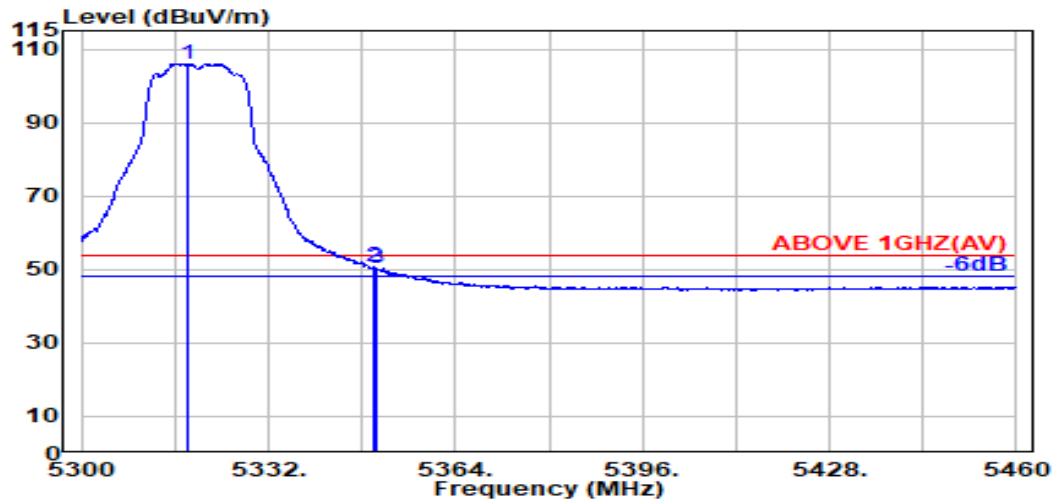


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	33.76	8.54	39.26	103.02	106.07	---	---	Average
5350.000	33.70	8.57	39.26	47.75	50.77	54.00	3.23	Average
5350.400	33.70	8.57	39.26	47.39	50.40	54.00	3.60	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

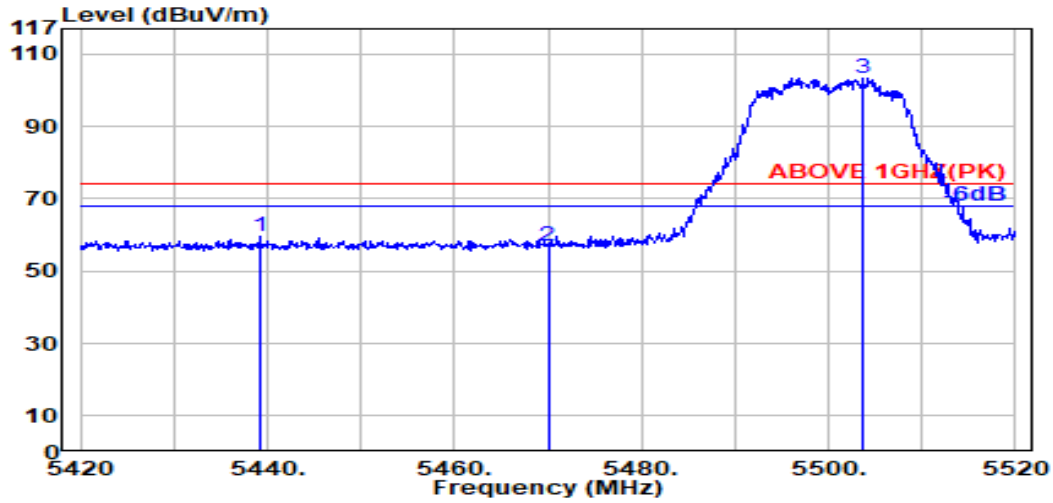

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.200	33.98	8.66	39.25	56.22	59.61	74.00	14.39	Peak
5470.000	34.04	8.69	39.25	53.45	56.93	74.00	17.07	Peak
@ 5503.700	34.09	8.72	39.25	99.96	103.52	---	---	Peak

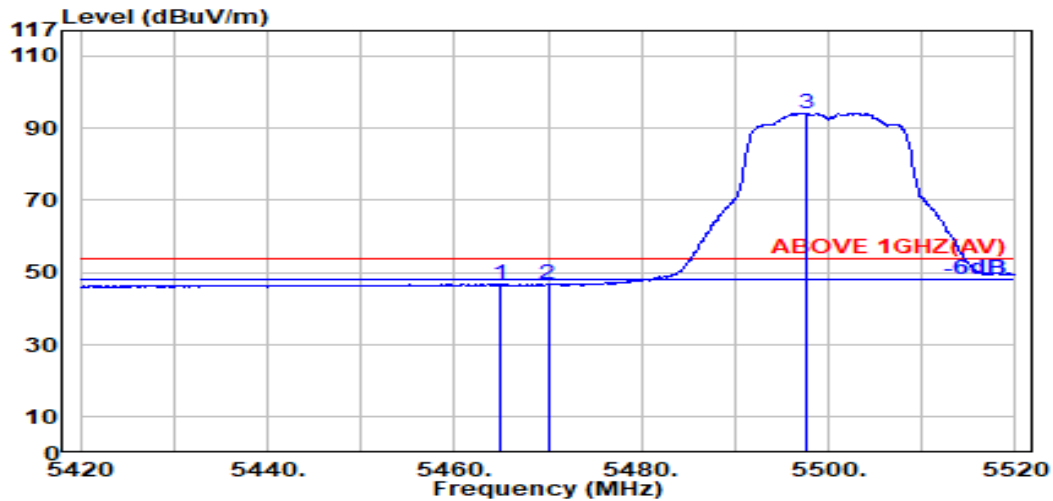


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.03	8.68	39.25	43.40	46.86	54.00	7.14	Average
5470.000	34.04	8.69	39.25	43.14	46.62	54.00	7.38	Average
@ 5497.600	34.10	8.71	39.25	90.69	94.25	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

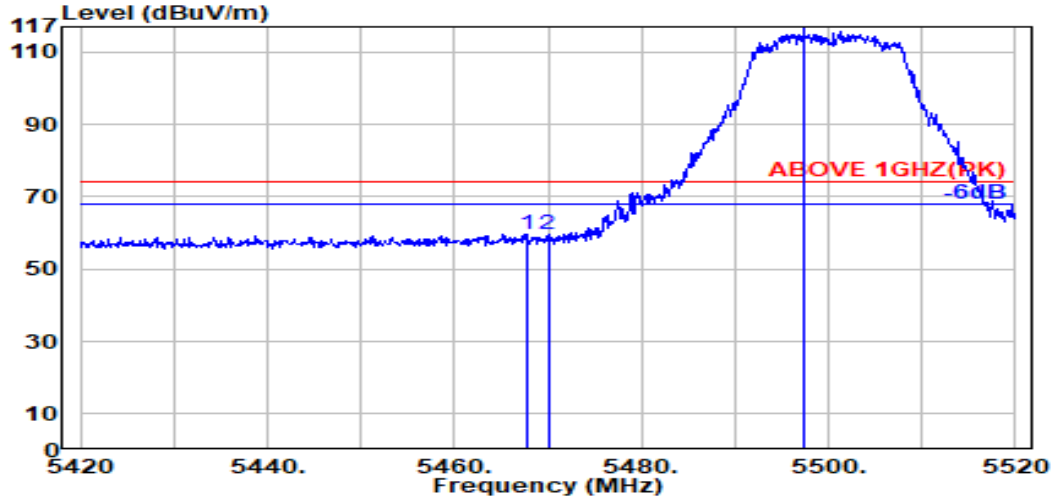

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.25	56.17	59.64	74.00	14.36	Peak
5470.000	34.04	8.69	39.25	55.96	59.44	74.00	14.56	Peak
@ 5497.400	34.09	8.71	39.25	112.97	116.52	---	---	Peak

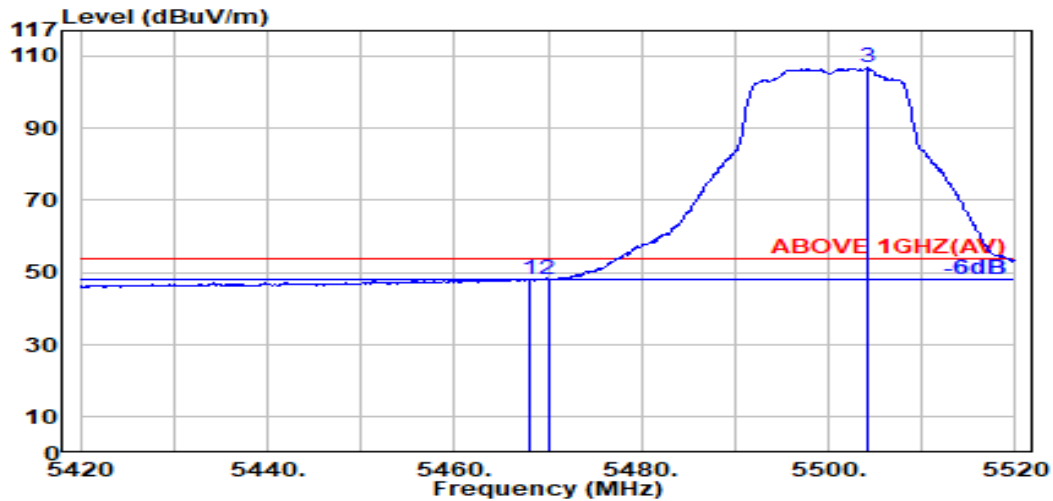


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.25	44.82	48.29	54.00	5.71	Average
5470.000	34.04	8.69	39.25	44.56	48.04	54.00	5.96	Average
@ 5504.300	34.09	8.72	39.25	103.07	106.63	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

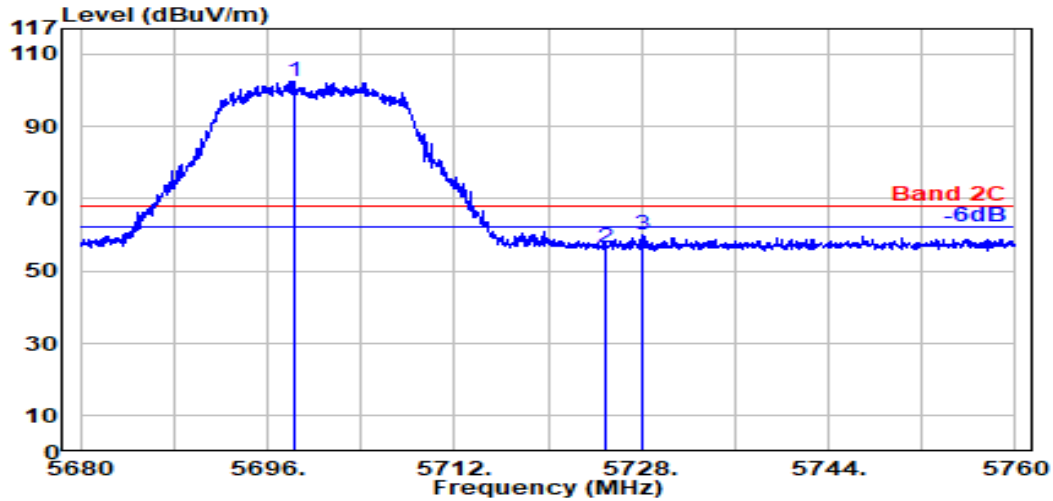

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.350	33.61	8.90	39.29	99.20	102.42	---	---	Peak
5725.000	33.60	8.93	39.29	53.48	56.71	68.20	11.49	Peak
5728.000	33.60	8.93	39.29	56.96	60.19	68.20	8.01	Peak

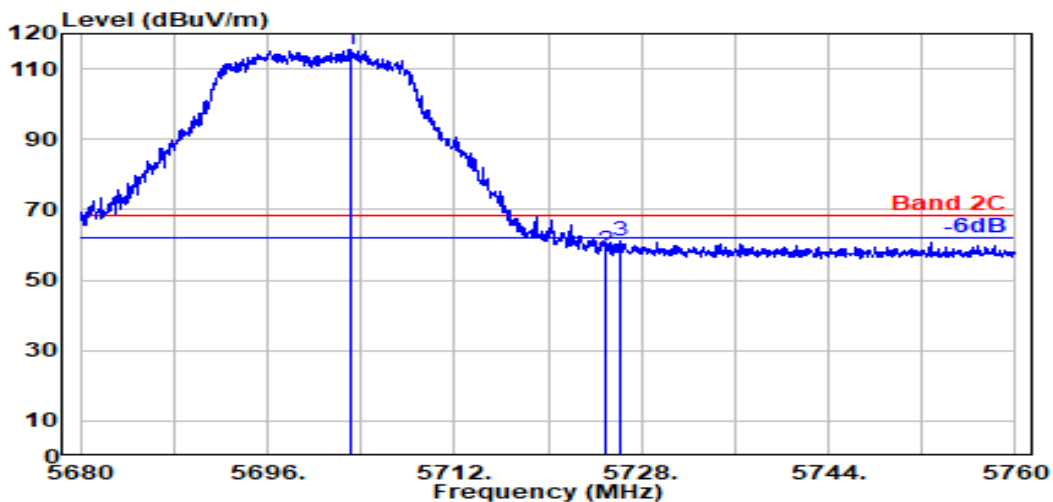


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.200	33.60	8.91	39.29	112.38	115.60	---	---	Peak
5725.000	33.60	8.93	39.29	55.28	58.51	68.20	9.69	Peak
5726.250	33.60	8.93	39.29	57.82	61.06	68.20	7.14	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

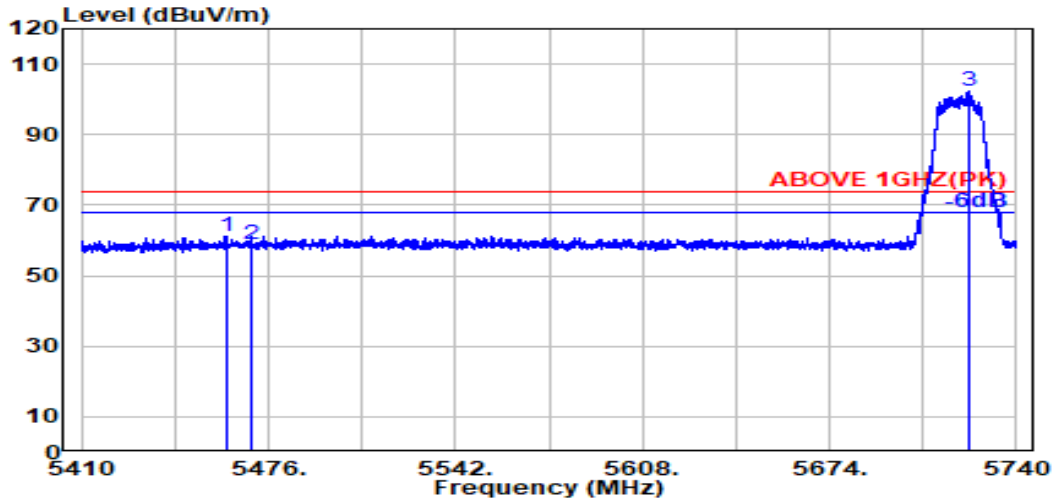

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.02	8.68	39.25	57.49	60.94	74.00	13.06	Peak
5470.000	34.04	8.69	39.25	55.28	58.76	74.00	15.24	Peak
@ 5722.900	33.60	8.92	39.29	99.01	102.25	---	---	Peak

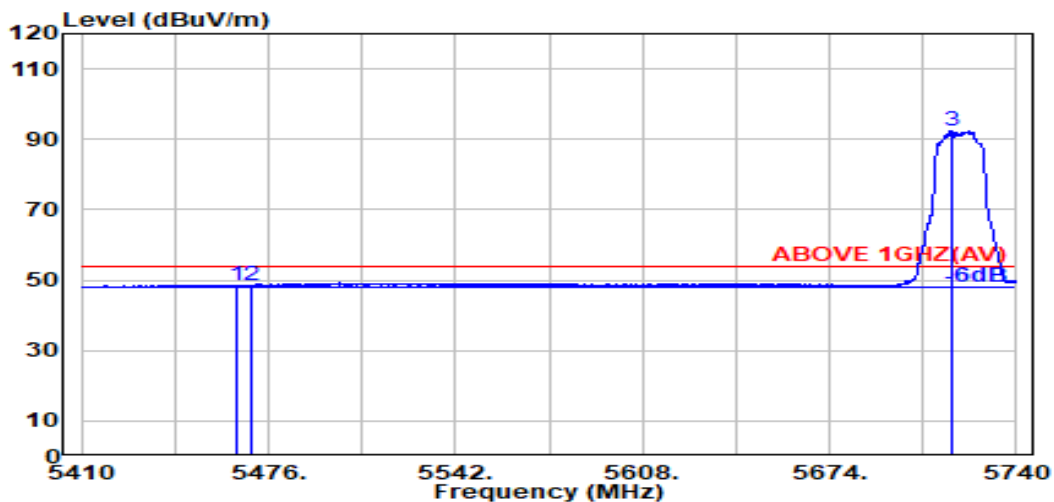


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.03	8.68	39.25	45.18	48.65	54.00	5.35	Average
5470.000	34.04	8.69	39.25	44.98	48.45	54.00	5.55	Average
@ 5717.400	33.60	8.92	39.29	89.09	92.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

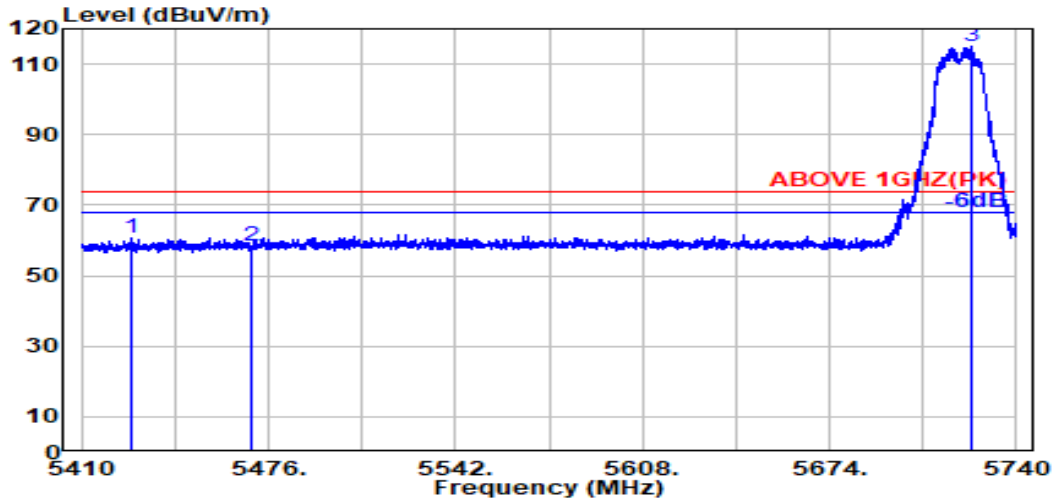

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.000	33.96	8.65	39.25	57.26	60.61	74.00	13.39	Peak
5470.000	34.04	8.69	39.25	55.08	58.56	74.00	15.44	Peak
@ 5724.200	33.60	8.92	39.29	111.80	115.04	---	---	Peak

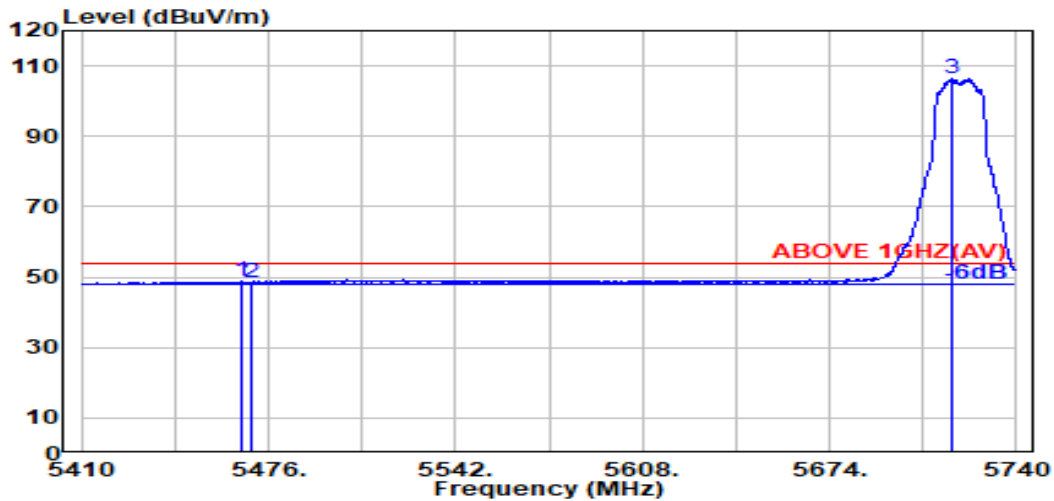


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.03	8.68	39.25	45.22	48.68	54.00	5.32	Average
5470.000	34.04	8.69	39.25	45.03	48.50	54.00	5.50	Average
@ 5717.300	33.60	8.92	39.29	103.06	106.29	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

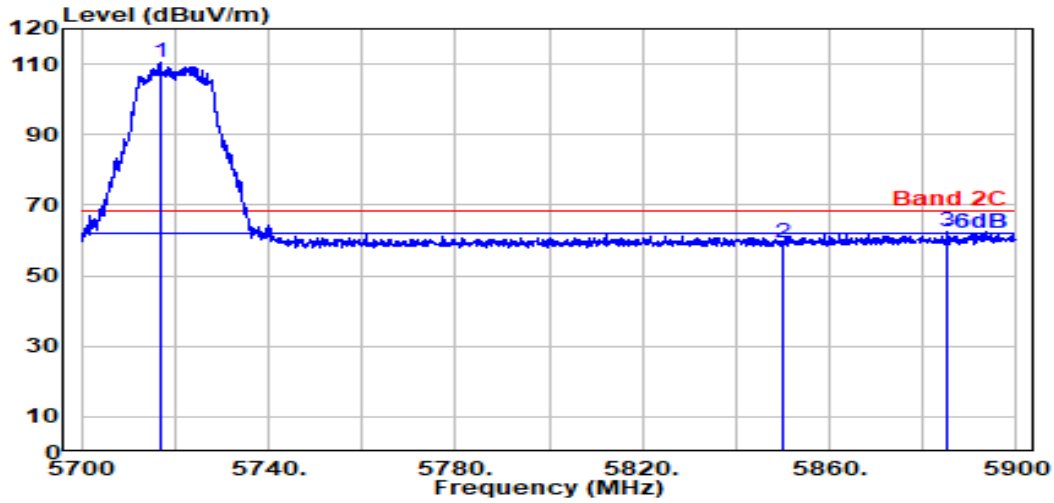

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.100	33.60	8.92	39.29	107.04	110.27	---	---	Peak
5850.000	33.90	9.04	39.31	55.92	59.54	68.20	8.66	Peak
5885.400	34.04	9.07	39.32	58.68	62.48	68.20	5.72	Peak

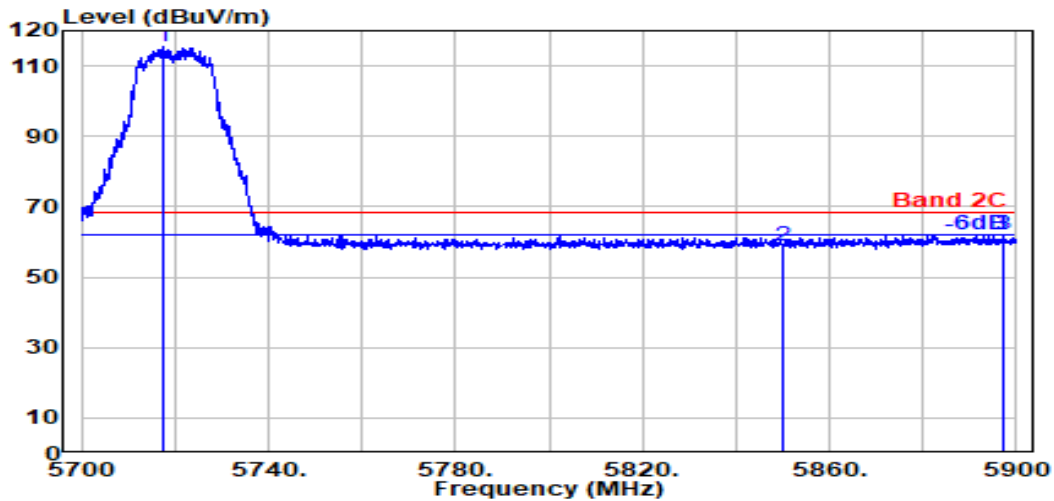


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.300	33.60	8.92	39.29	112.10	115.33	---	---	Peak
5850.000	33.90	9.04	39.31	55.46	59.08	68.20	9.12	Peak
5897.200	34.09	9.08	39.32	58.02	61.87	68.20	6.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

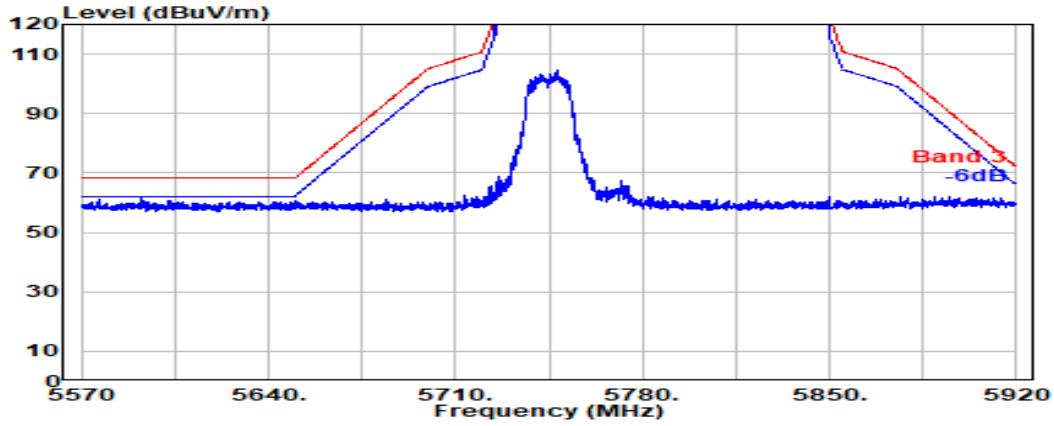


Antenna at Vertical Polarization

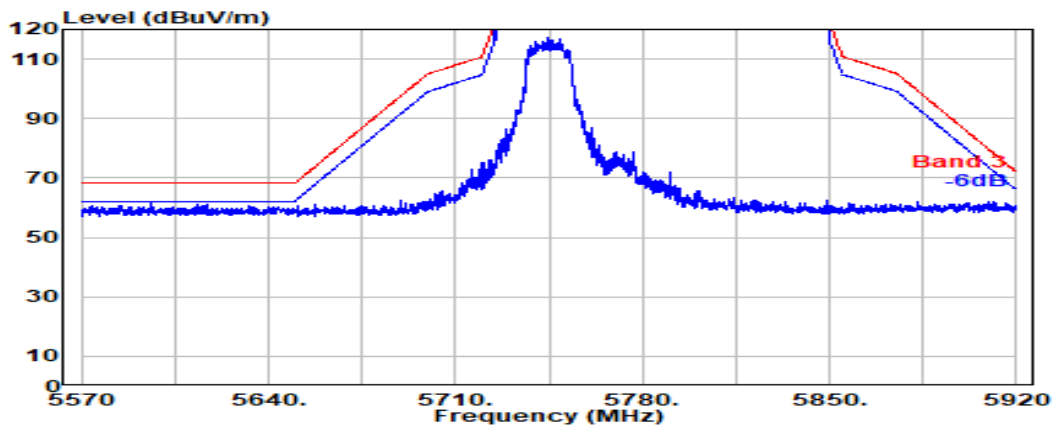


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

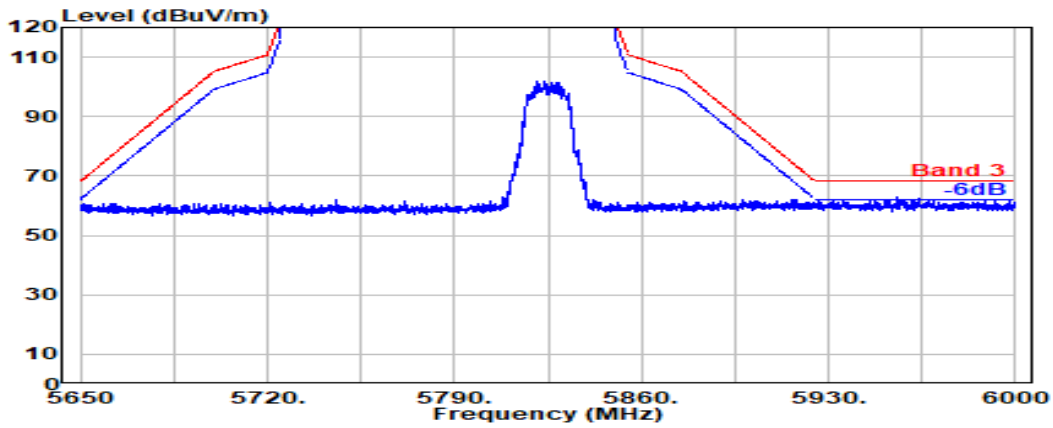

Antenna at Vertical Polarization

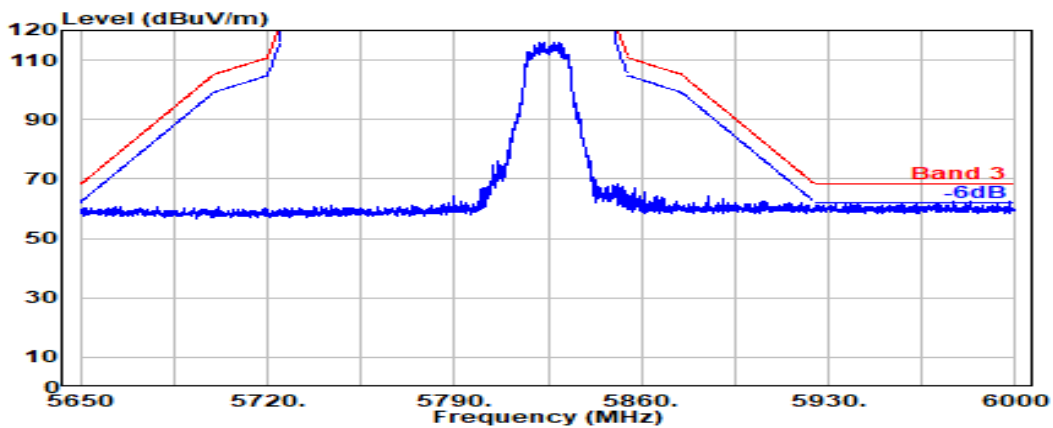


Mode	802.11a	U-NII Band	4
		Frequency	TX 5885MHz

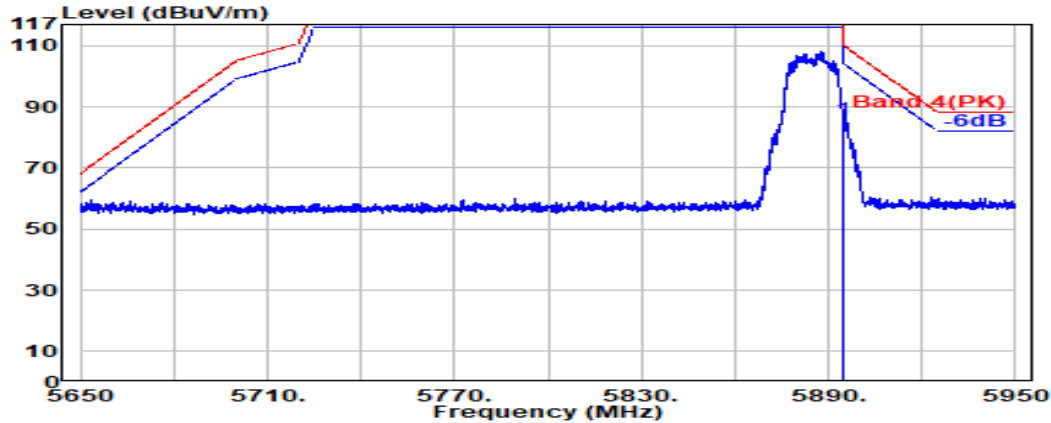

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	82.19	86.02	110.20	24.18	Peak

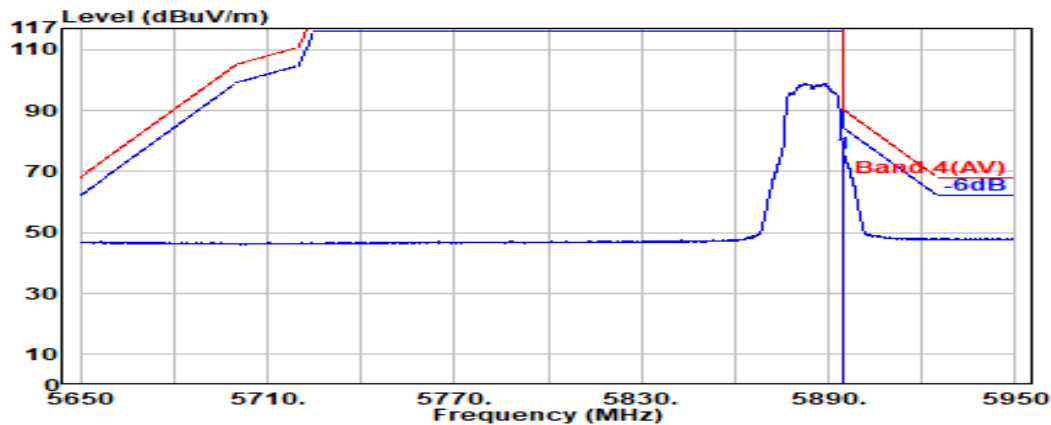


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	72.15	75.98	90.20	14.22	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11a	U-NII Band	4
		Frequency	TX 5885MHz

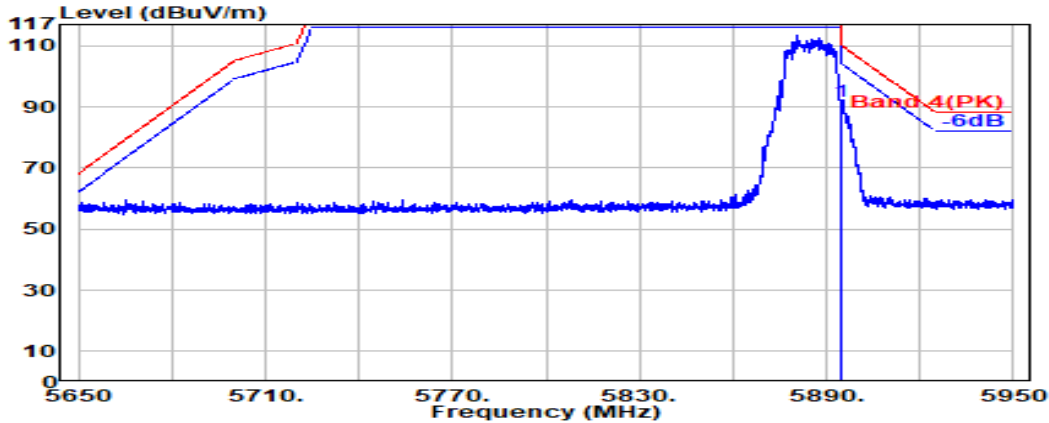

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	87.85	91.69	110.20	18.51	Peak

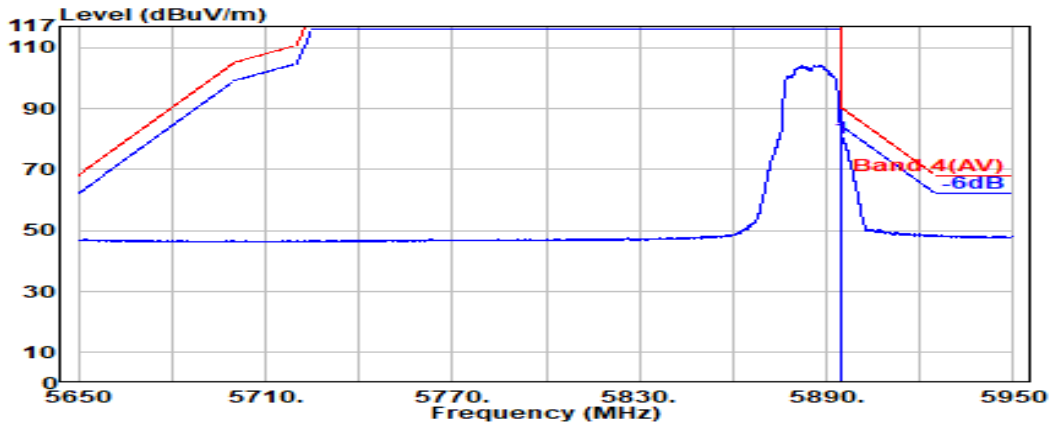


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	76.72	80.56	90.20	9.64	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

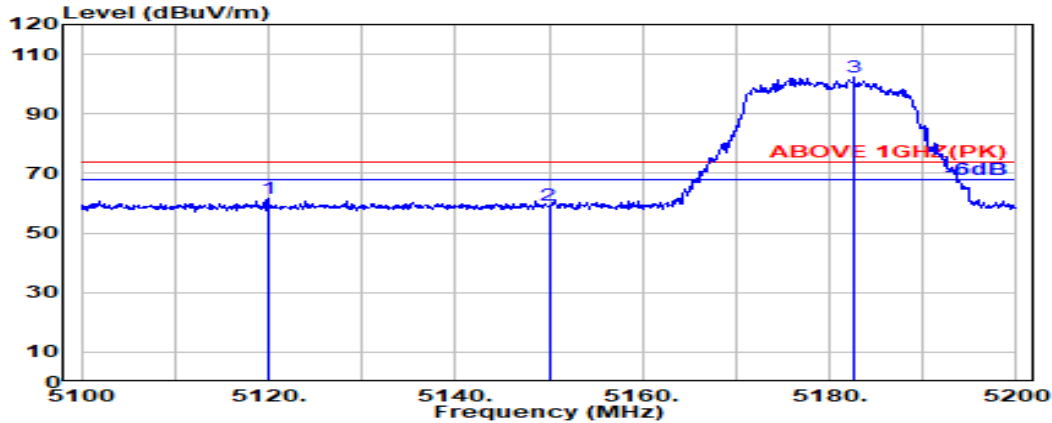

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.000	33.44	8.34	39.27	58.96	61.47	74.00	12.53	Peak
5150.000	33.50	8.37	39.27	56.56	59.16	74.00	14.84	Peak
@ 5182.600	33.70	8.41	39.27	99.30	102.14	---	---	Peak

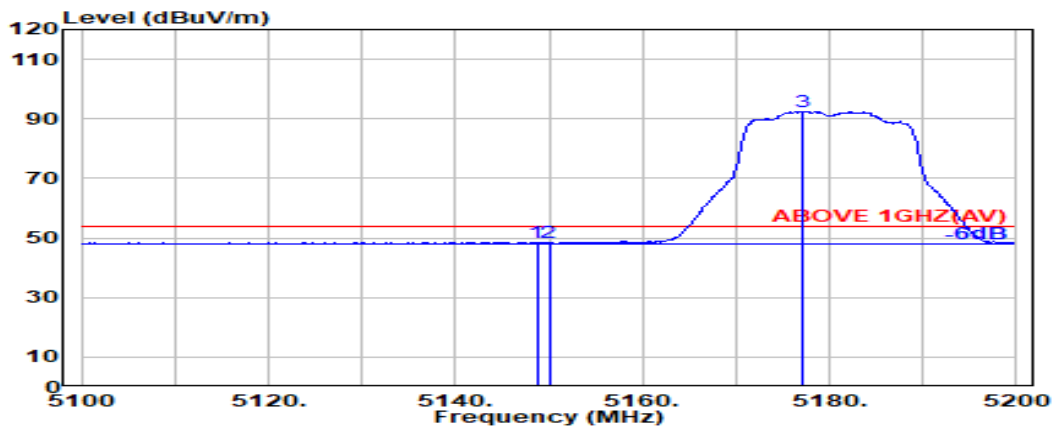


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.27	45.86	48.46	54.00	5.54	Average
5150.000	33.50	8.37	39.27	45.73	48.33	54.00	5.67	Average
@ 5177.200	33.66	8.40	39.27	89.80	92.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

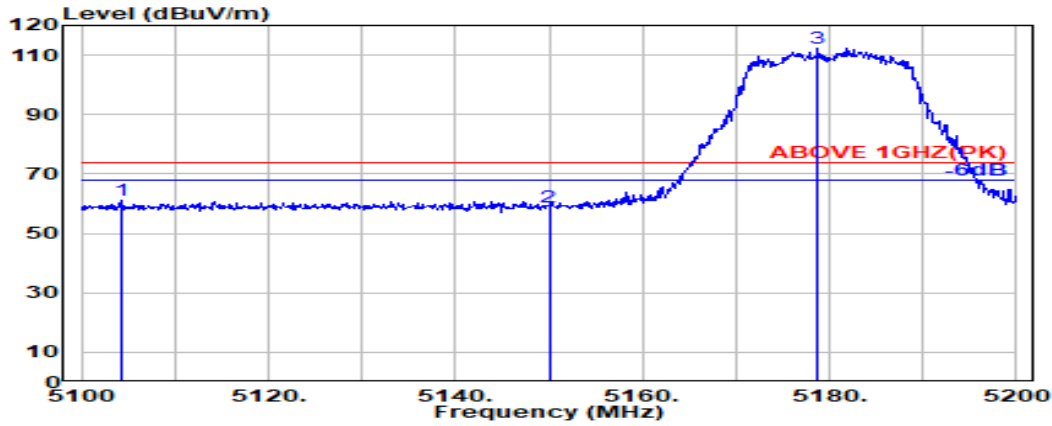

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.400	33.41	8.33	39.27	58.67	61.14	74.00	12.86	Peak
5150.000	33.50	8.37	39.27	56.41	59.01	74.00	14.99	Peak
@ 5178.800	33.67	8.40	39.27	109.37	112.17	---	---	Peak

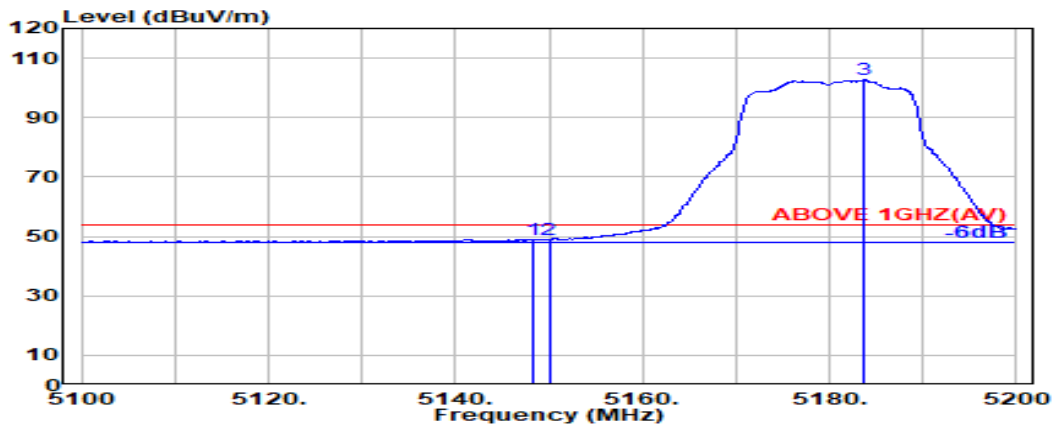


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.50	8.37	39.27	46.44	49.04	54.00	4.96	Average
5150.000	33.50	8.37	39.27	46.43	49.03	54.00	4.97	Average
@ 5183.700	33.70	8.41	39.27	99.79	102.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

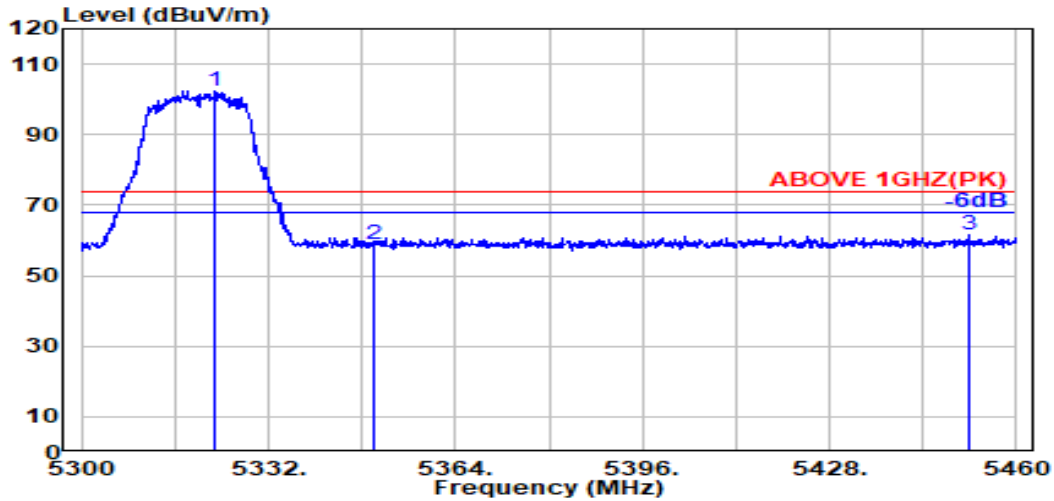

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.26	99.38	102.42	---	---	Peak
5350.000	33.70	8.57	39.26	55.84	58.85	74.00	15.15	Peak
5451.700	34.00	8.67	39.25	57.97	61.39	74.00	12.61	Peak

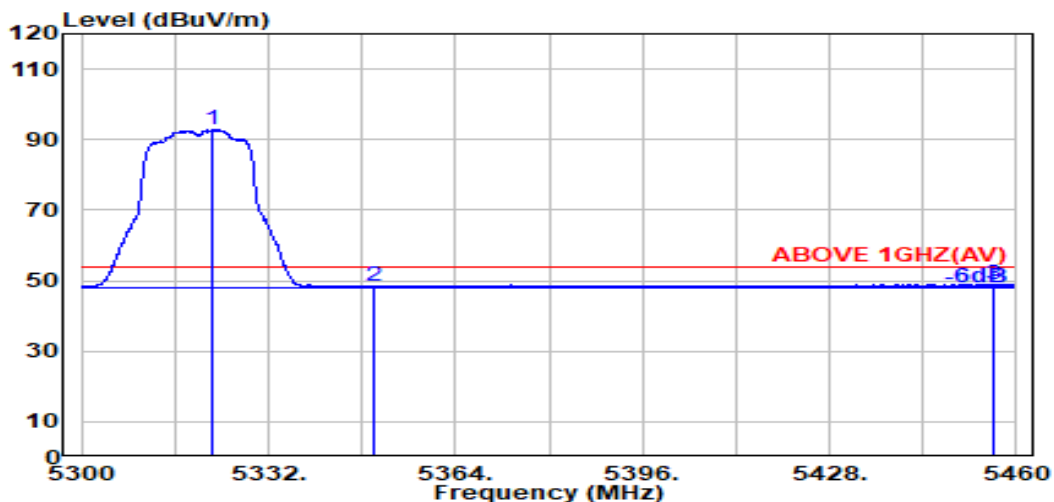


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	33.76	8.55	39.26	89.73	92.77	---	---	Average
5350.000	33.70	8.57	39.26	45.32	48.34	54.00	5.66	Average
5456.200	34.01	8.67	39.25	45.51	48.94	54.00	5.06	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

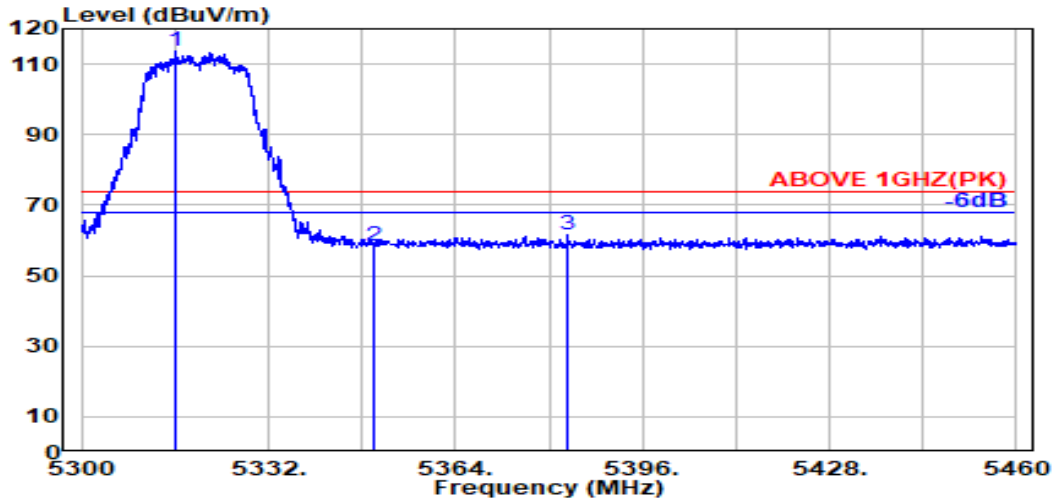

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.26	110.42	113.47	---	---	Peak
5350.000	33.70	8.57	39.26	55.58	58.60	74.00	15.40	Peak
5383.100	33.83	8.60	39.26	58.18	61.36	74.00	12.64	Peak

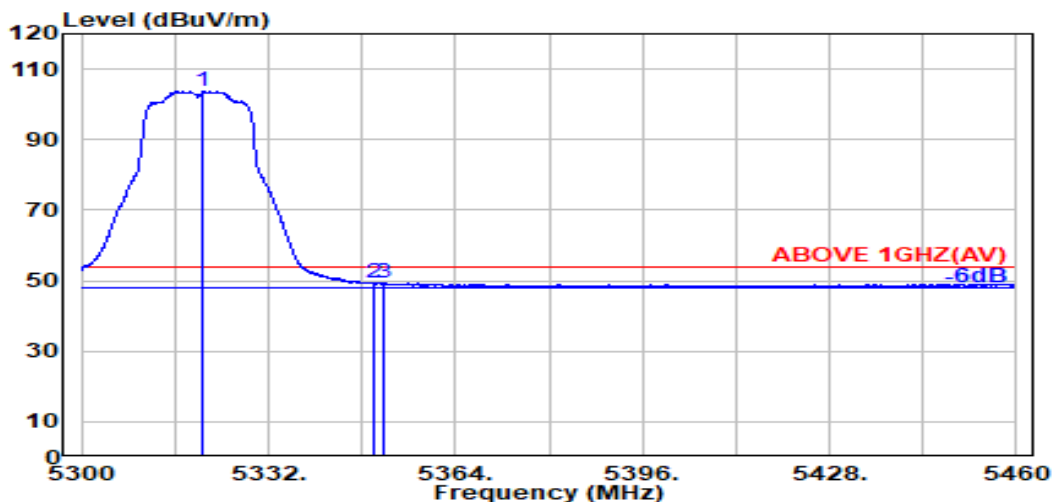


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.900	33.76	8.54	39.26	100.59	103.63	---	---	Average
5350.000	33.70	8.57	39.26	46.41	49.42	54.00	4.58	Average
5351.800	33.71	8.57	39.26	46.40	49.43	54.00	4.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

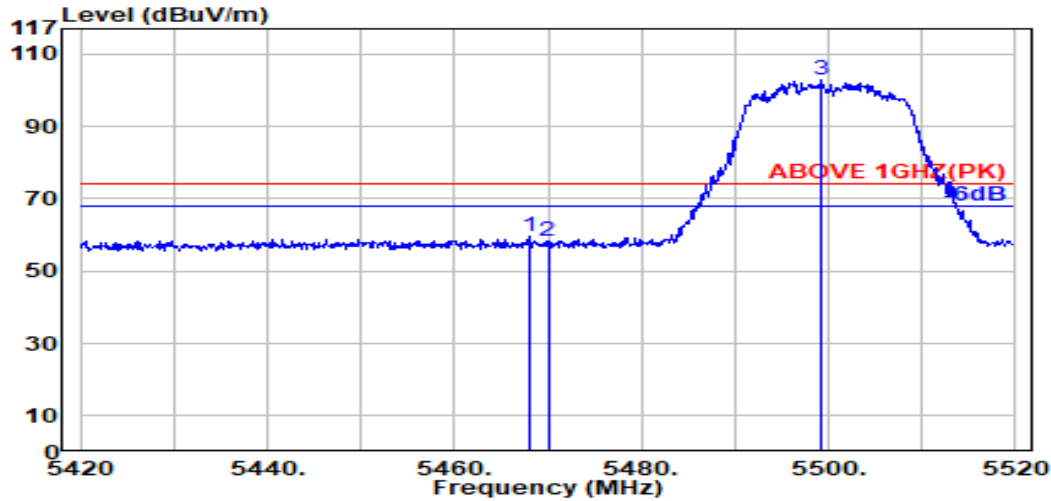

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.25	56.08	59.55	74.00	14.45	Peak
5470.000	34.04	8.69	39.25	54.91	58.39	74.00	15.61	Peak
@ 5499.300	34.10	8.72	39.25	99.18	102.74	---	---	Peak

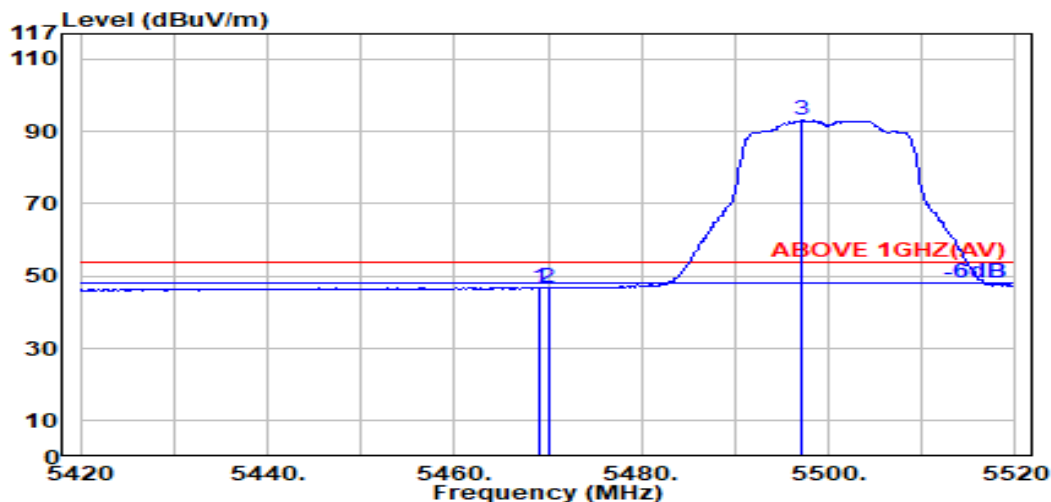


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.25	43.46	46.93	54.00	7.07	Average
5470.000	34.04	8.69	39.25	43.23	46.71	54.00	7.29	Average
@ 5497.200	34.09	8.71	39.25	89.43	92.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

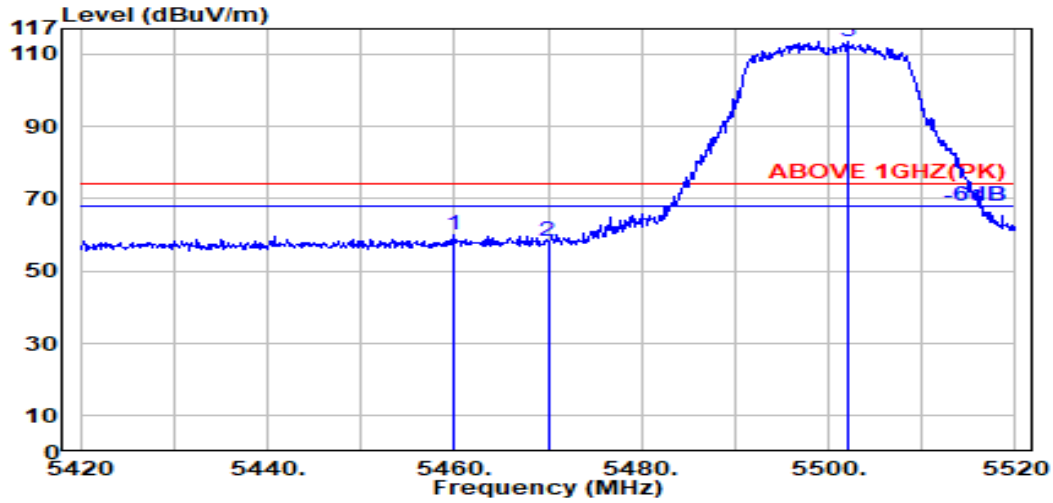

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.02	8.68	39.25	56.42	59.86	74.00	14.14	Peak
5470.000	34.04	8.69	39.25	54.71	58.18	74.00	15.82	Peak
@ 5502.000	34.10	8.72	39.25	110.09	113.65	---	---	Peak

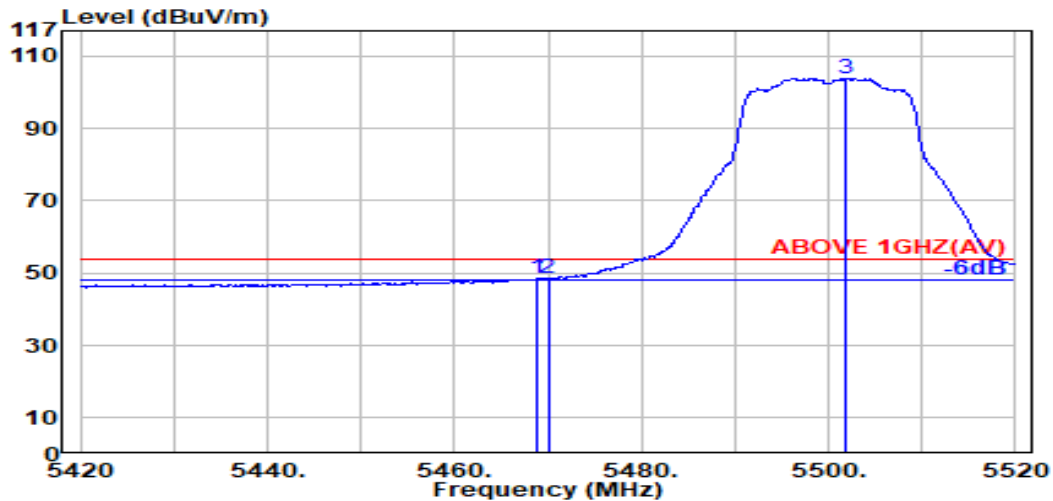


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.25	44.97	48.44	54.00	5.56	Average
5470.000	34.04	8.69	39.25	45.04	48.52	54.00	5.48	Average
@ 5501.800	34.10	8.72	39.25	100.23	103.79	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

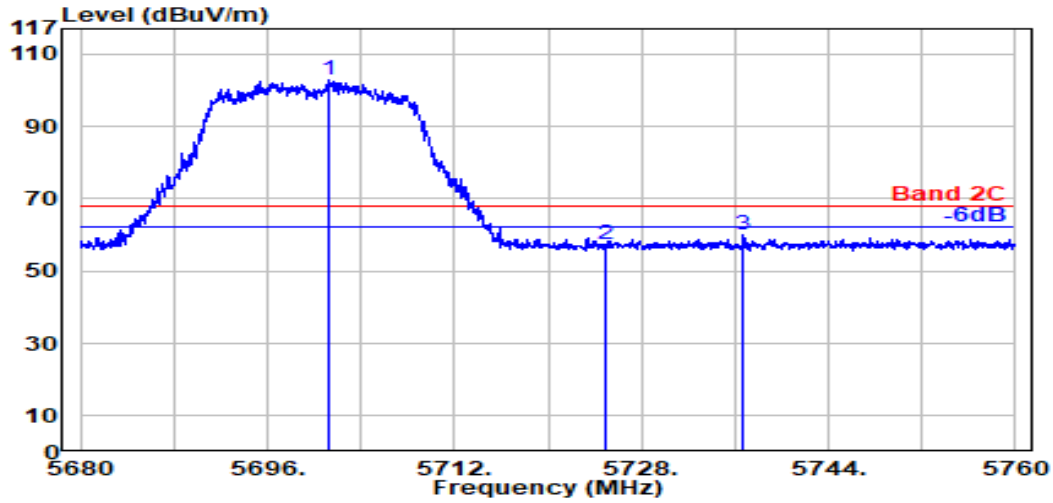

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.300	33.60	8.90	39.29	99.56	102.78	---	---	Peak
5725.000	33.60	8.93	39.29	54.34	57.57	68.20	10.63	Peak
5736.750	33.60	8.94	39.29	56.66	59.90	68.20	8.30	Peak

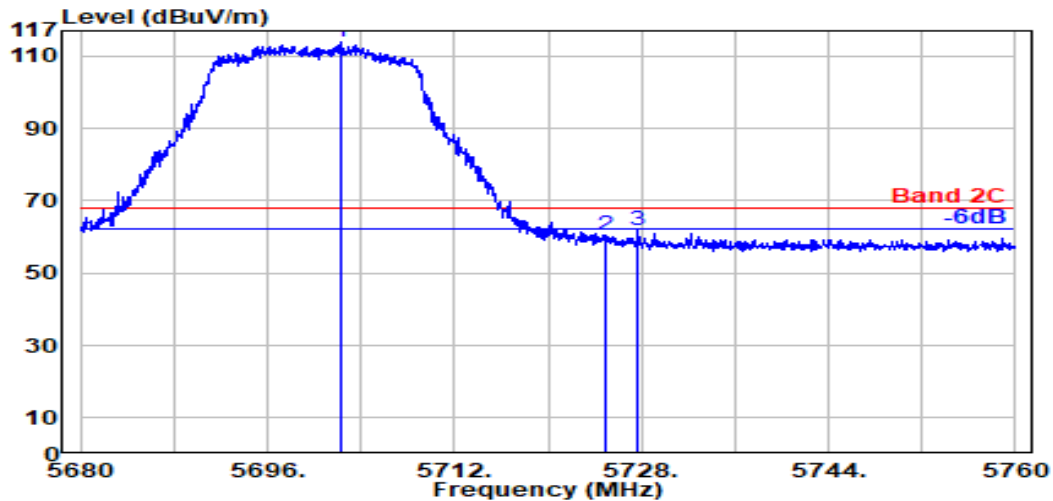


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.250	33.60	8.90	39.29	110.88	114.10	---	---	Peak
5725.000	33.60	8.93	39.29	57.17	60.40	68.20	7.80	Peak
5727.750	33.60	8.93	39.29	58.61	61.85	68.20	6.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

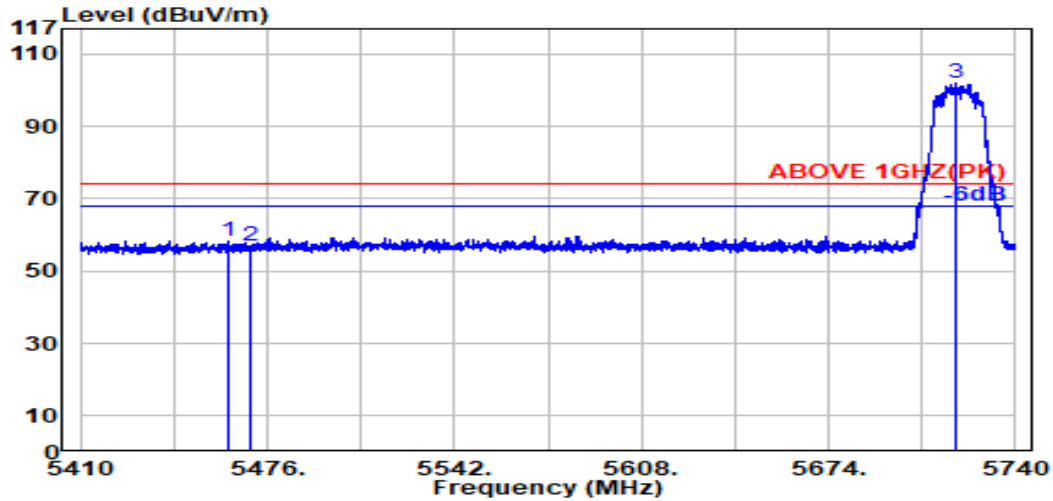

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.02	8.68	39.25	55.03	58.48	74.00	15.52	Peak
5470.000	34.04	8.69	39.25	53.48	56.95	74.00	17.05	Peak
@ 5719.000	33.60	8.92	39.29	98.93	102.16	---	---	Peak

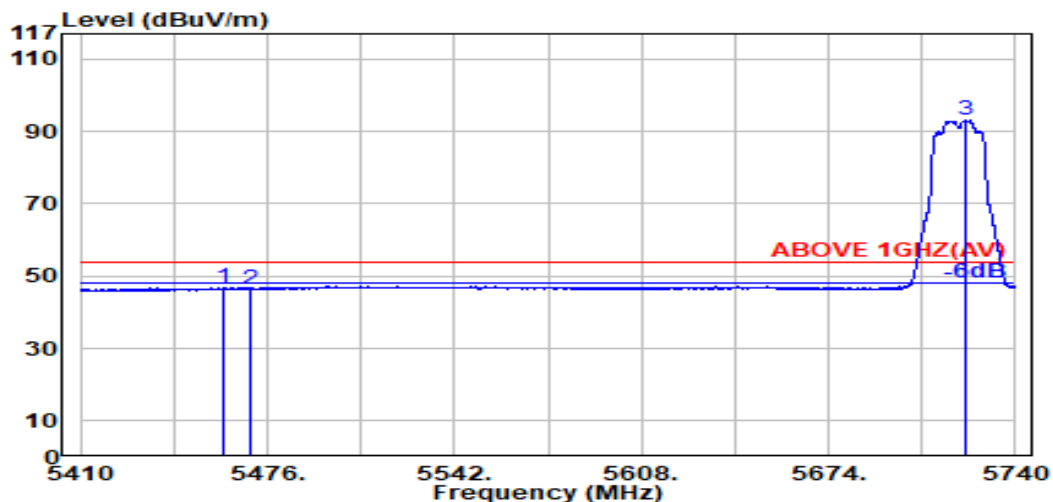


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.100	34.02	8.68	39.25	43.33	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.25	43.09	46.56	54.00	7.44	Average
@ 5722.700	33.60	8.92	39.29	89.76	92.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

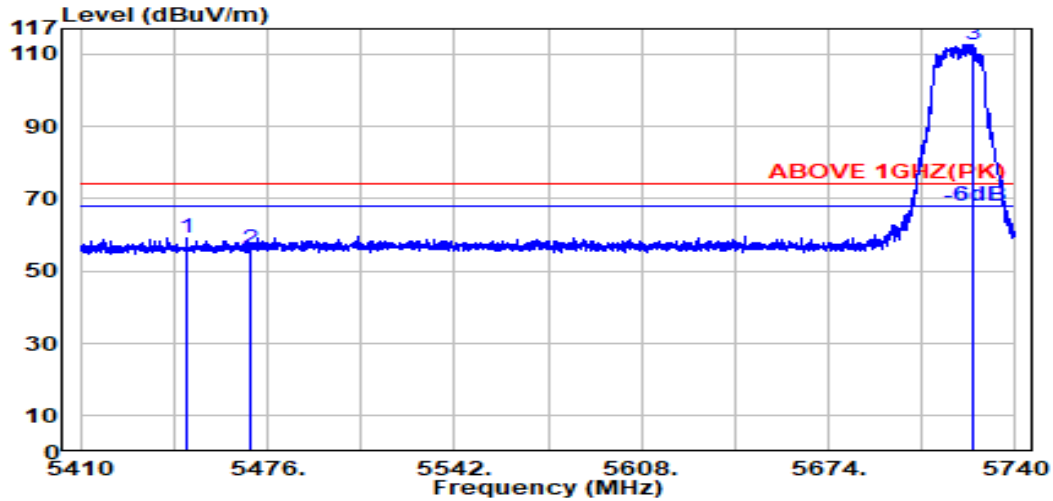

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.200	33.99	8.67	39.25	55.82	59.23	74.00	14.77	Peak
5470.000	34.04	8.69	39.25	52.63	56.10	74.00	17.90	Peak
@ 5725.000	33.60	8.93	39.29	109.49	112.73	---	---	Peak

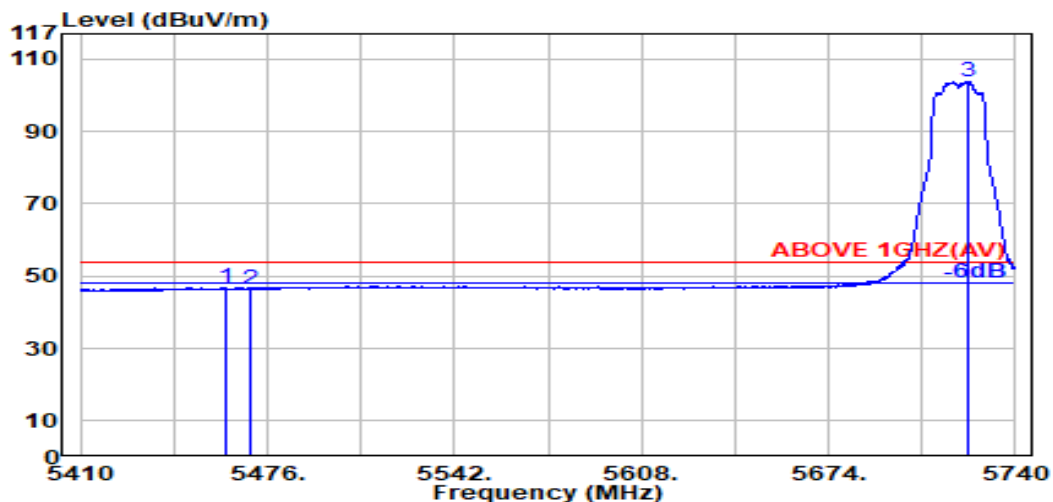


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.02	8.68	39.25	43.29	46.74	54.00	7.26	Average
5470.000	34.04	8.69	39.25	43.02	46.50	54.00	7.50	Average
@ 5723.300	33.60	8.92	39.29	100.67	103.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

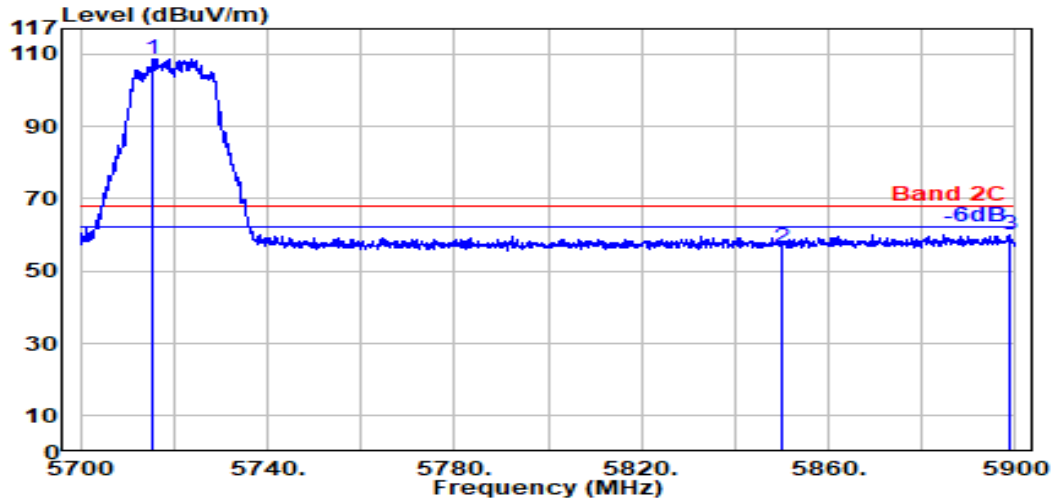

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.600	33.60	8.92	39.29	105.36	108.59	---	---	Peak
5850.000	33.90	9.04	39.31	53.01	56.63	68.20	11.57	Peak
5898.700	34.09	9.08	39.32	56.07	59.92	68.20	8.28	Peak

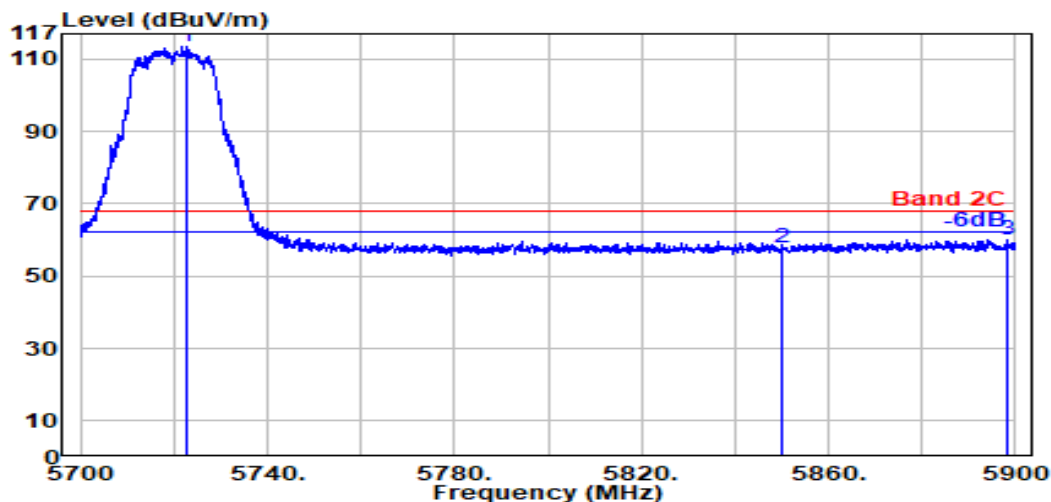

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.60	8.92	39.29	110.07	113.30	---	---	Peak
5850.000	33.90	9.04	39.31	54.00	57.62	68.20	10.58	Peak
5898.400	34.09	9.08	39.32	56.35	60.20	68.20	8.00	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

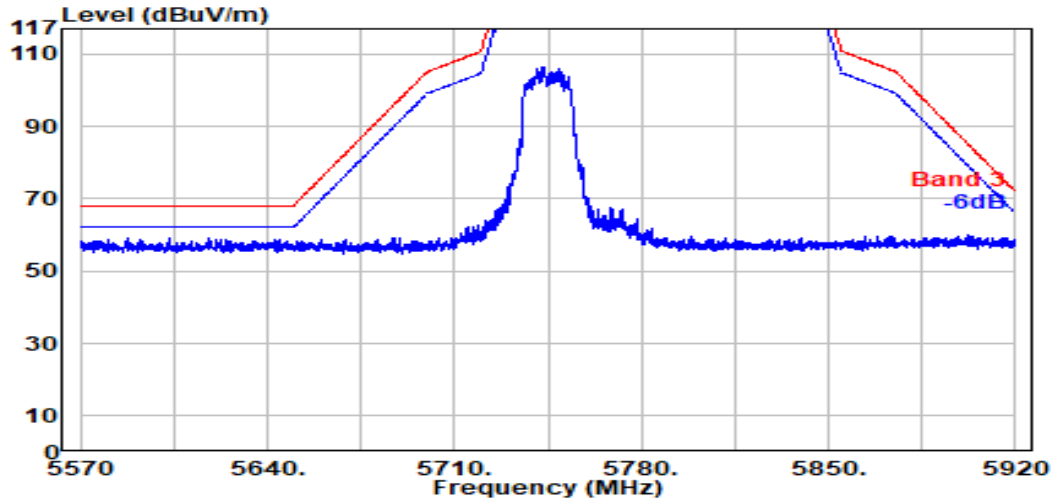


Antenna at Vertical Polarization

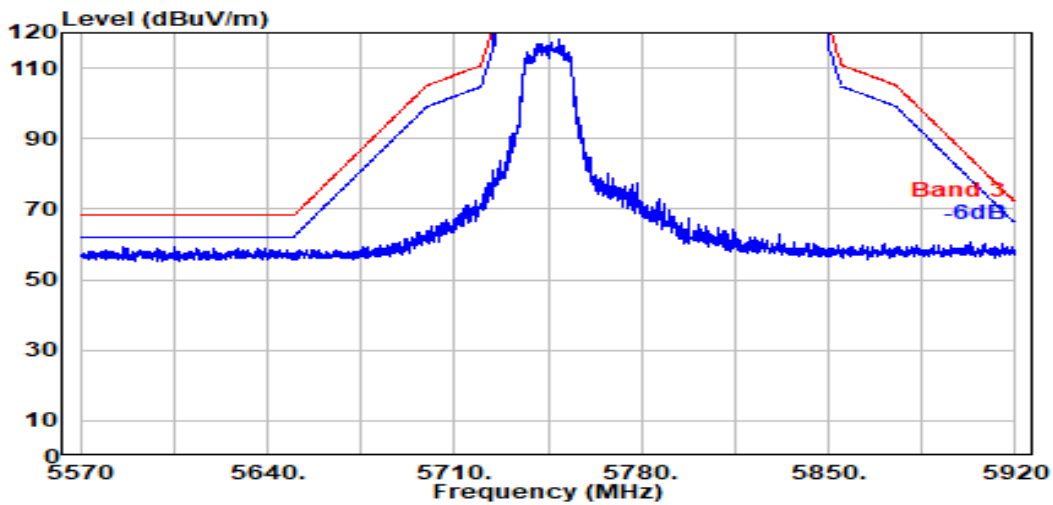


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

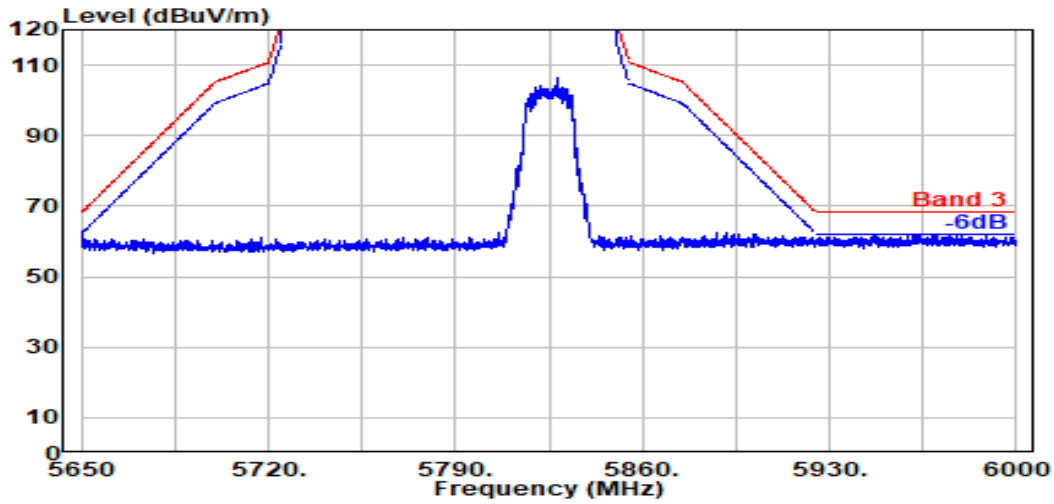

Antenna at Vertical Polarization

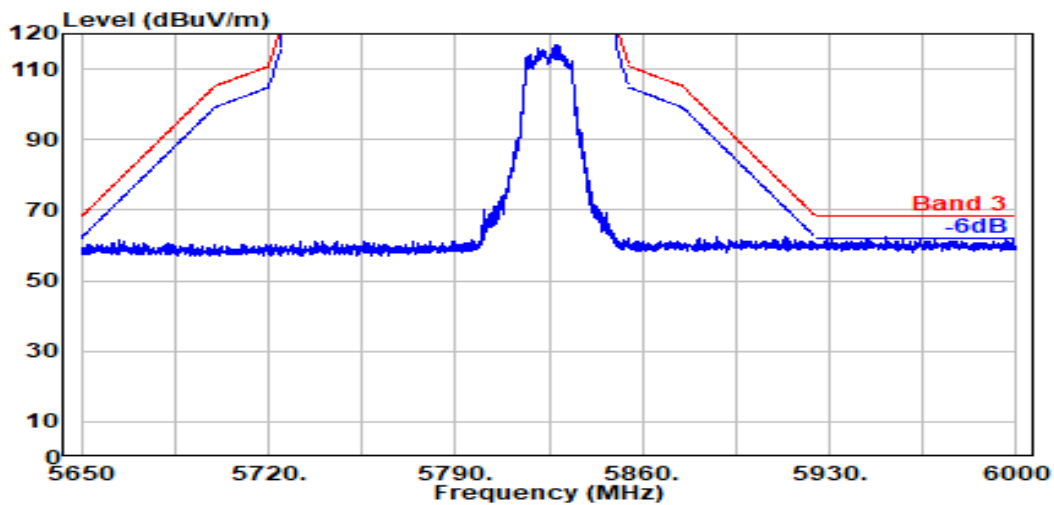


Mode	802.11n-HT20	U-NII Band	4
		Frequency	TX 5885MHz

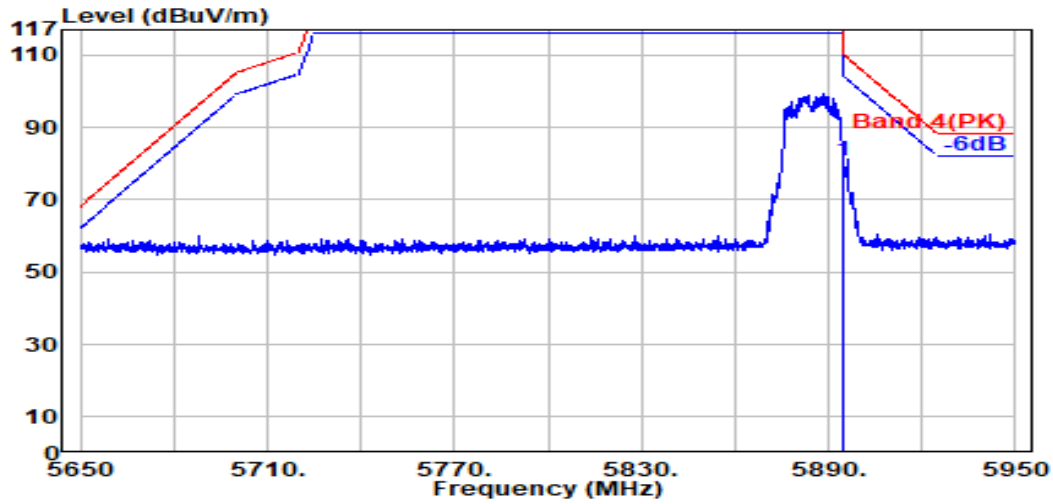

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	77.05	80.89	110.20	29.31	Peak

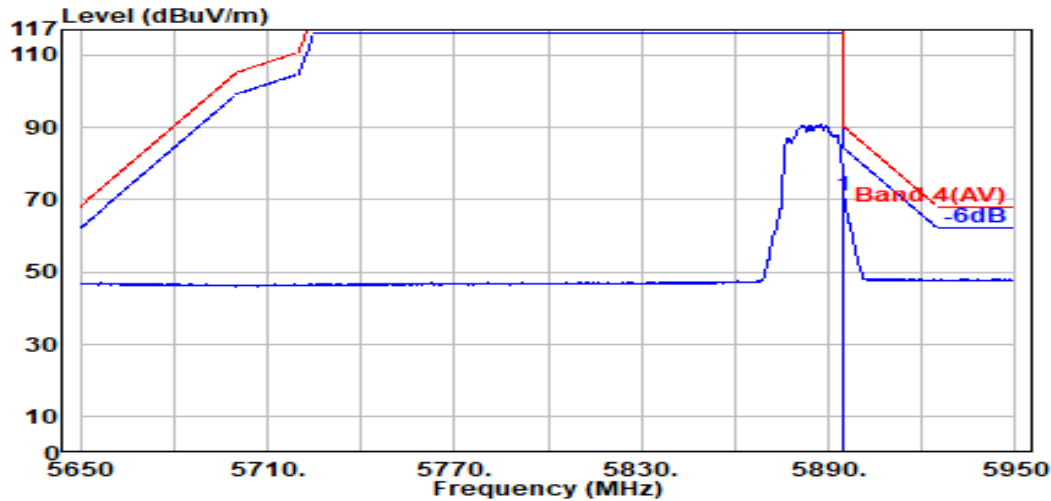


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	67.05	70.88	90.20	19.32	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT20	U-NII Band	4
		Frequency	TX 5885MHz

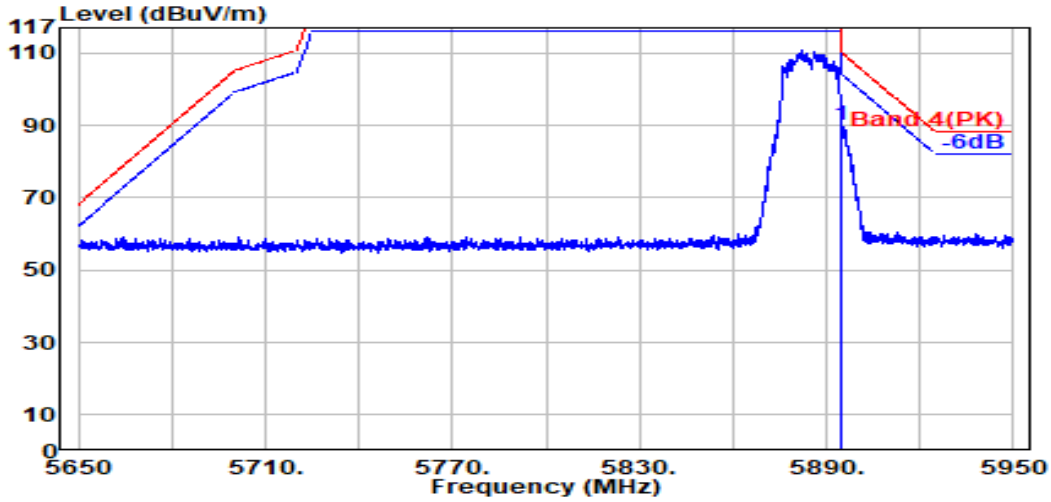

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	86.26	90.10	110.20	20.10	Peak

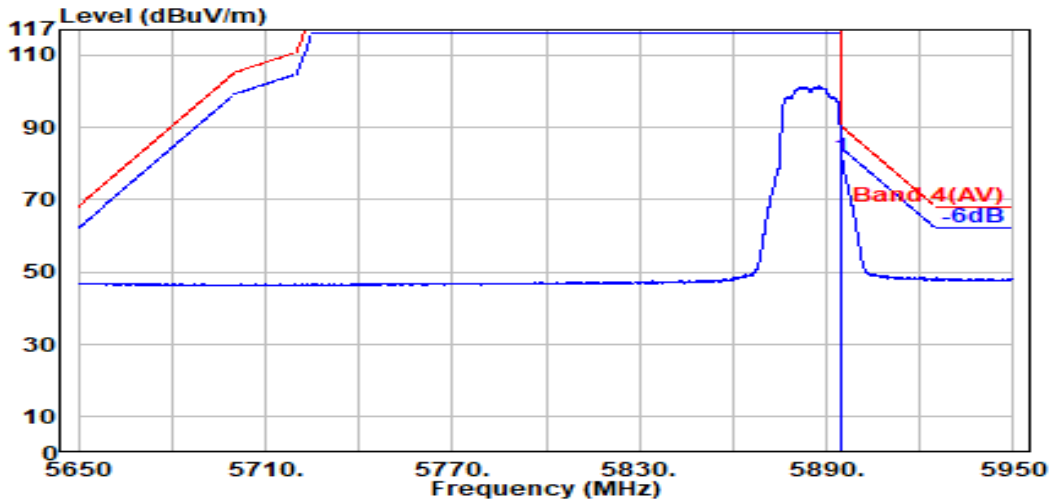


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	77.85	81.68	90.20	8.52	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

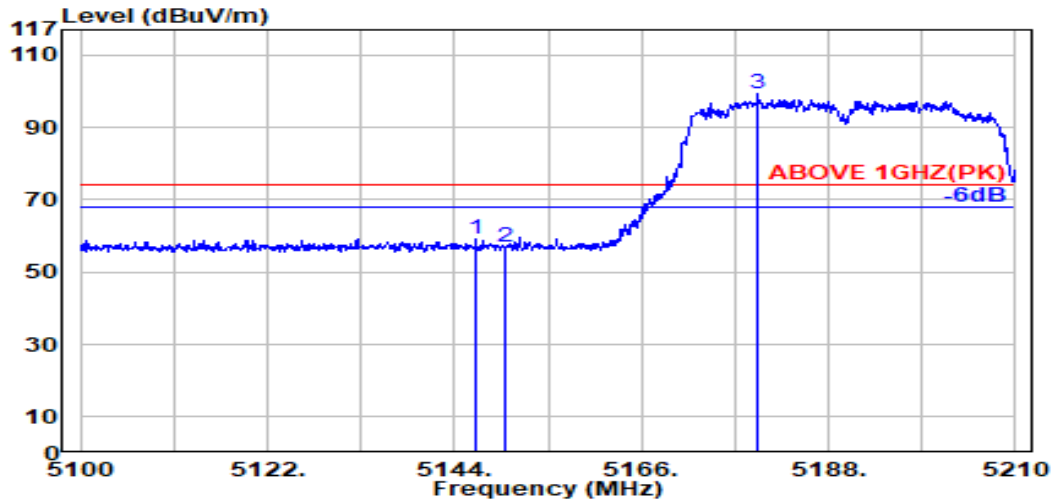

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.49	8.37	39.27	56.42	59.02	74.00	14.98	Peak
5150.000	33.50	8.37	39.27	54.52	57.13	74.00	16.87	Peak
@ 5179.700	33.68	8.40	39.27	96.40	99.21	---	---	Peak

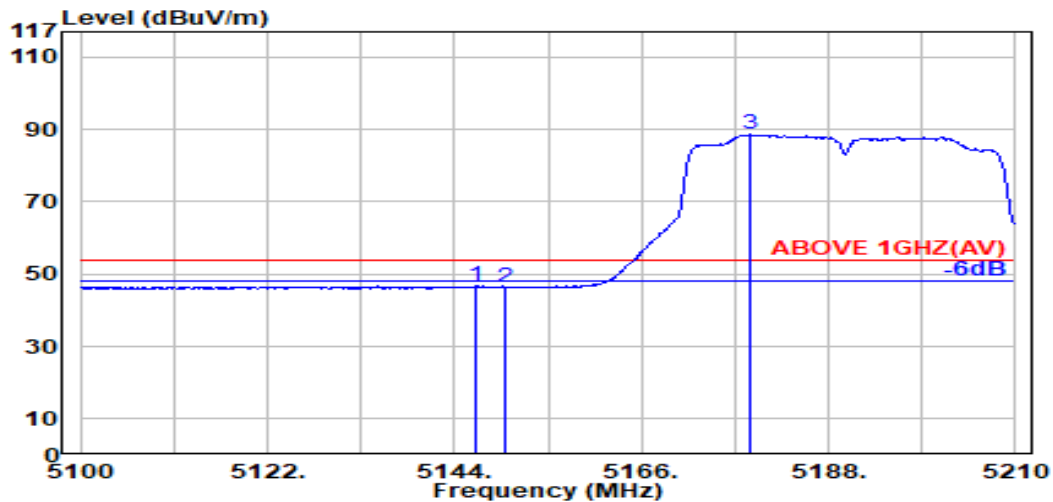


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.27	44.09	46.68	54.00	7.32	Average
5150.000	33.50	8.37	39.27	43.76	46.36	54.00	7.64	Average
@ 5178.800	33.67	8.40	39.27	85.84	88.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

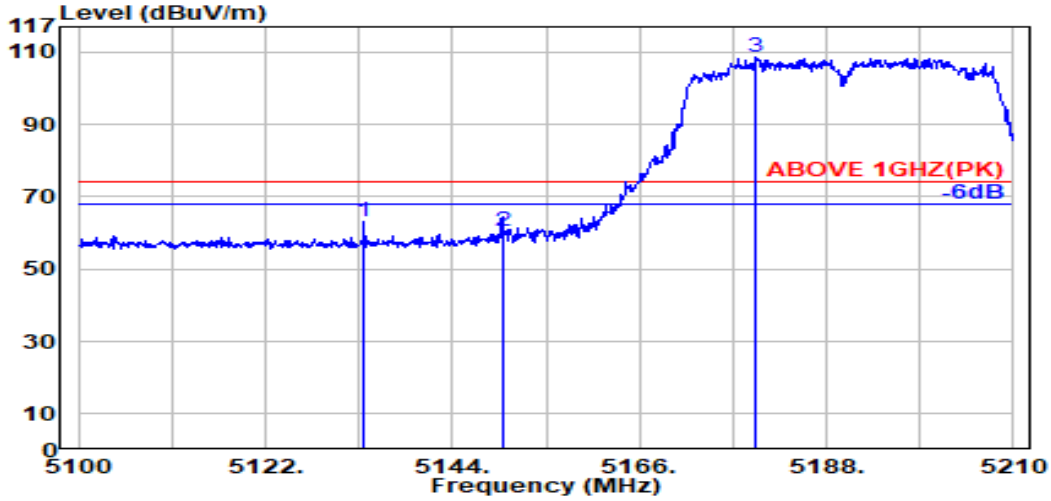

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.500	33.47	8.36	39.27	60.46	63.02	74.00	10.98	Peak
5150.000	33.50	8.37	39.27	57.69	60.30	74.00	13.70	Peak
@ 5179.700	33.68	8.40	39.27	105.95	108.77	---	---	Peak

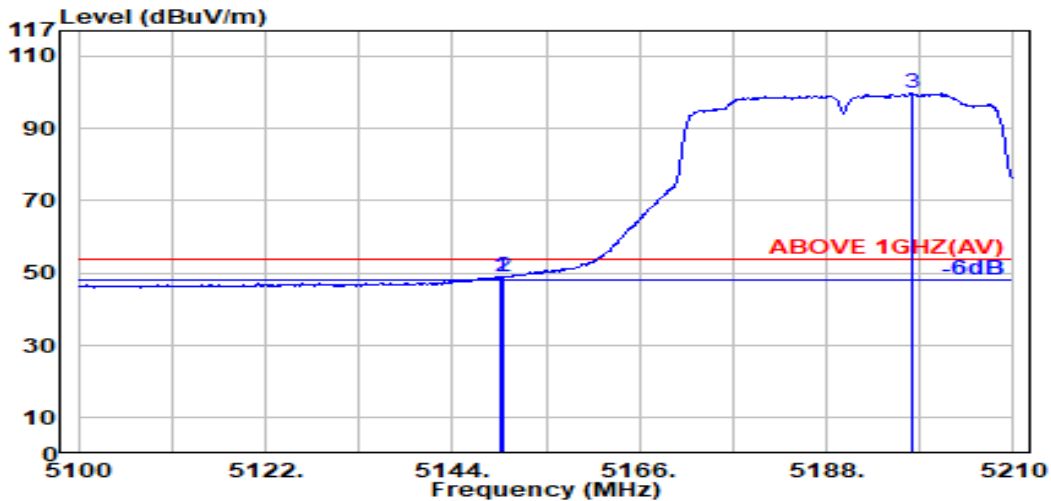


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	46.39	48.99	54.00	5.01	Average
5150.000	33.50	8.37	39.27	46.32	48.93	54.00	5.07	Average
@ 5198.000	33.79	8.42	39.27	96.72	99.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

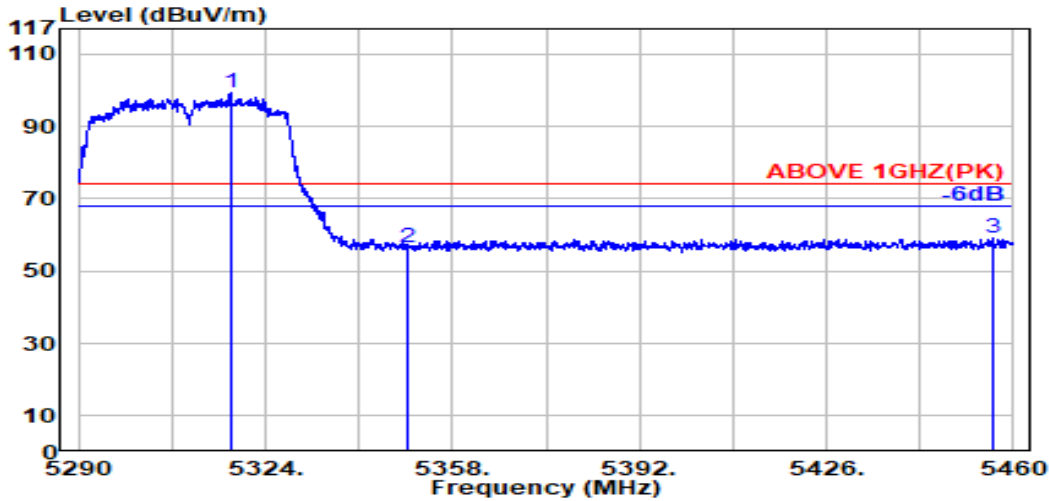

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	33.76	8.54	39.26	96.36	99.41	---	---	Peak
5350.000	33.70	8.57	39.26	53.65	56.67	74.00	17.33	Peak
5456.200	34.01	8.67	39.25	55.63	59.06	74.00	14.94	Peak

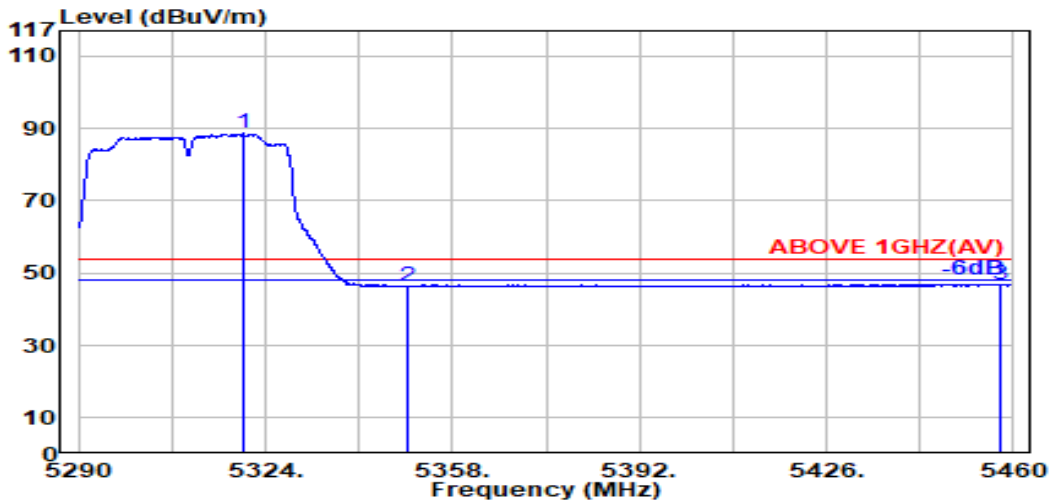


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.100	33.76	8.54	39.26	85.53	88.57	---	---	Average
5350.000	33.70	8.57	39.26	43.51	46.52	54.00	7.48	Average
5457.800	34.02	8.68	39.25	43.46	46.90	54.00	7.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

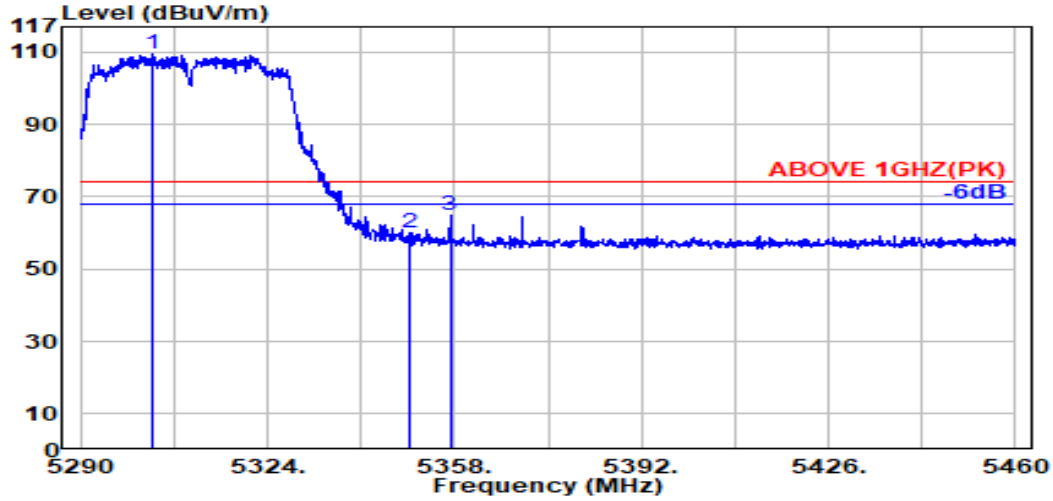

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.200	33.79	8.53	39.26	106.39	109.45	---	---	Peak
5350.000	33.70	8.57	39.26	57.07	60.09	74.00	13.91	Peak
5357.200	33.73	8.58	39.26	61.66	64.71	74.00	9.29	Peak

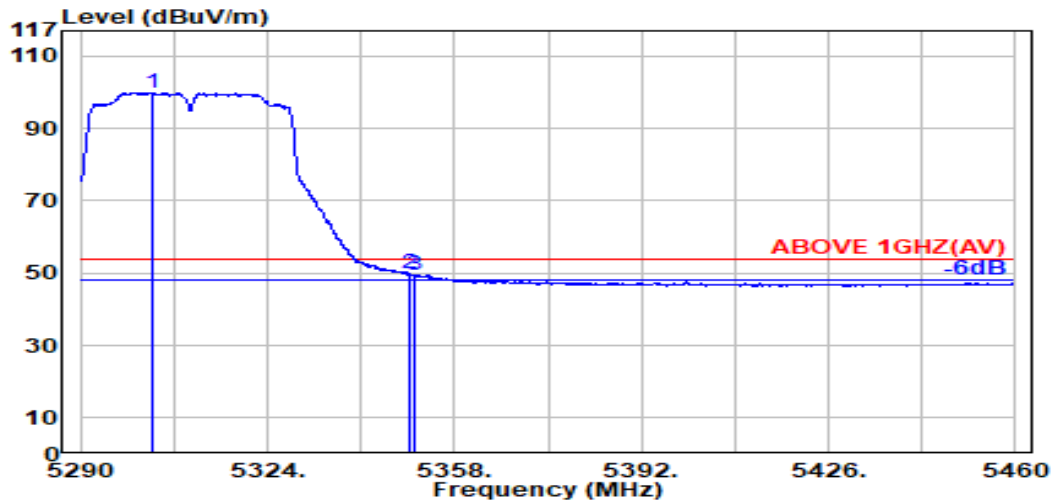


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.000	33.79	8.53	39.26	96.82	99.88	---	---	Average
5350.000	33.70	8.57	39.26	46.69	49.71	54.00	4.29	Average
5350.600	33.70	8.57	39.26	46.57	49.58	54.00	4.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

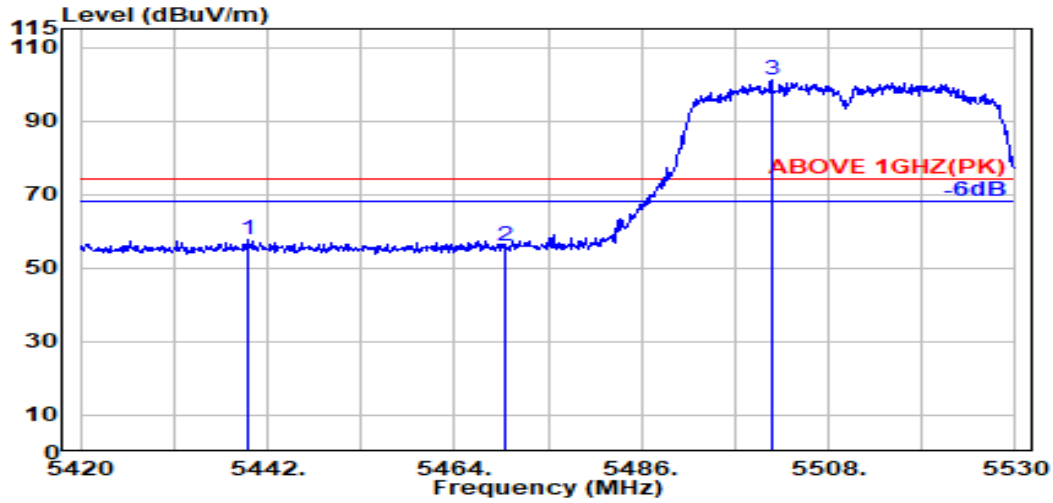

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.600	33.98	8.66	39.25	54.53	57.92	74.00	16.08	Peak
5470.000	34.04	8.69	39.25	52.59	56.07	74.00	17.93	Peak
@ 5501.300	34.10	8.72	39.25	97.42	100.99	---	---	Peak

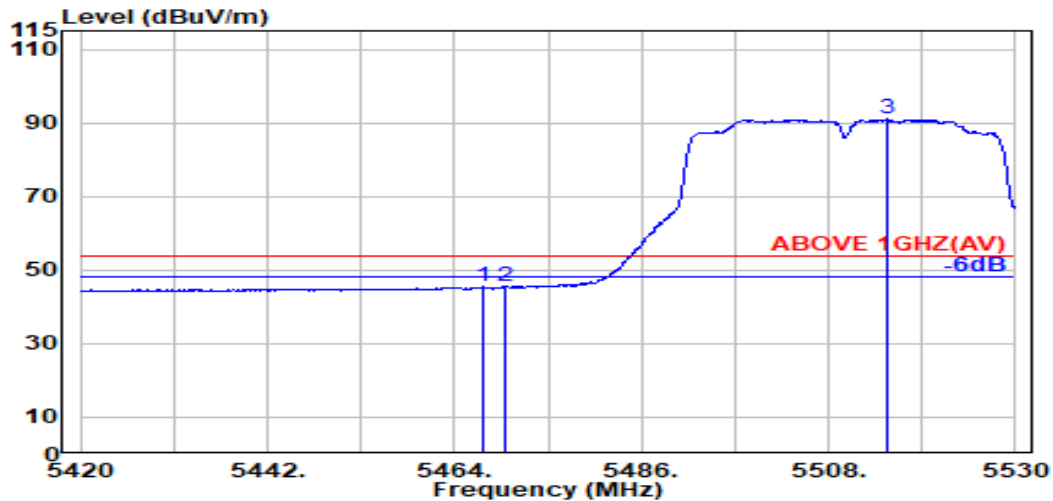


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.25	41.89	45.36	54.00	8.64	Average
5470.000	34.04	8.69	39.25	41.97	45.45	54.00	8.55	Average
@ 5514.800	34.07	8.73	39.25	87.43	90.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

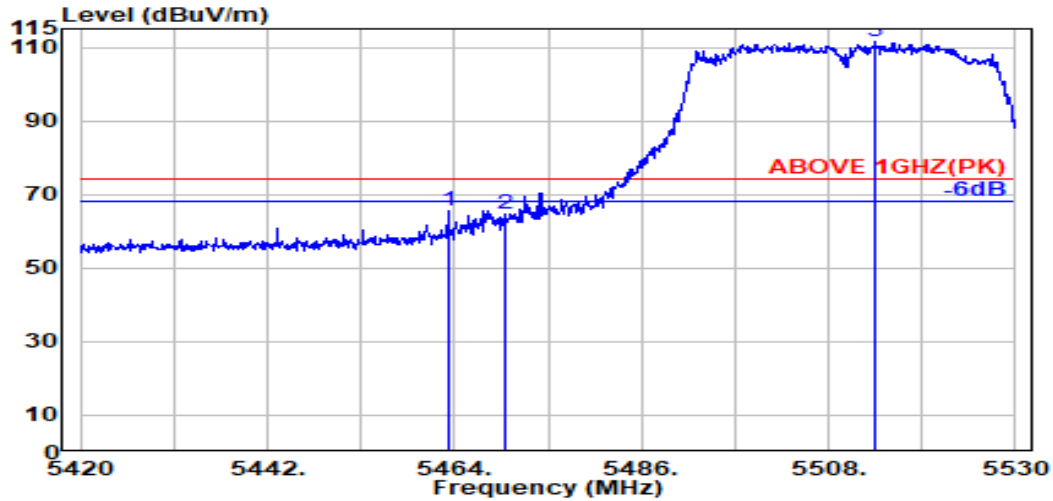

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.200	34.03	8.68	39.25	62.18	65.64	74.00	8.36	Peak
5470.000	34.04	8.69	39.25	61.19	64.66	74.00	9.34	Peak
@ 5513.500	34.07	8.73	39.25	107.89	111.44	---	---	Peak

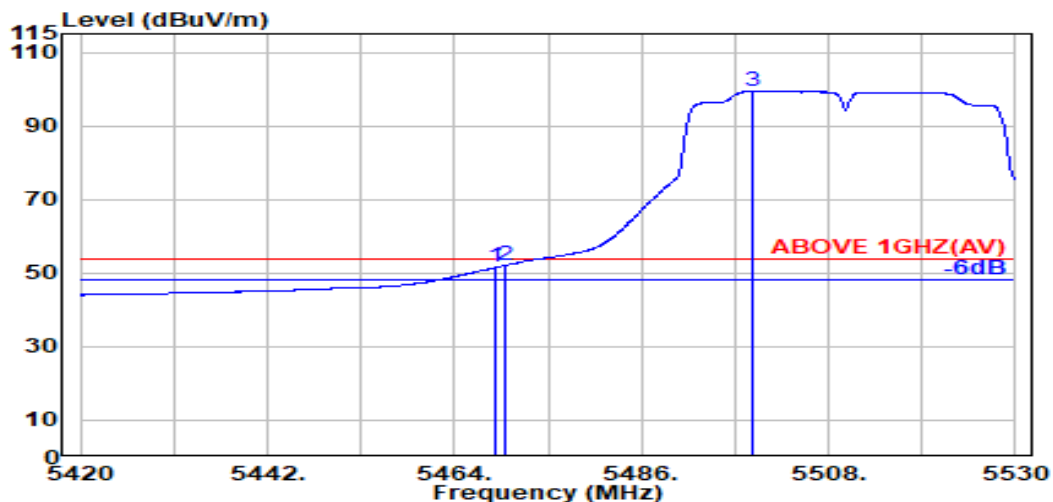


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	48.07	51.55	54.00	2.45	Average
5470.000	34.04	8.69	39.25	48.59	52.06	54.00	1.94	Average
@ 5499.200	34.10	8.72	39.25	95.74	99.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

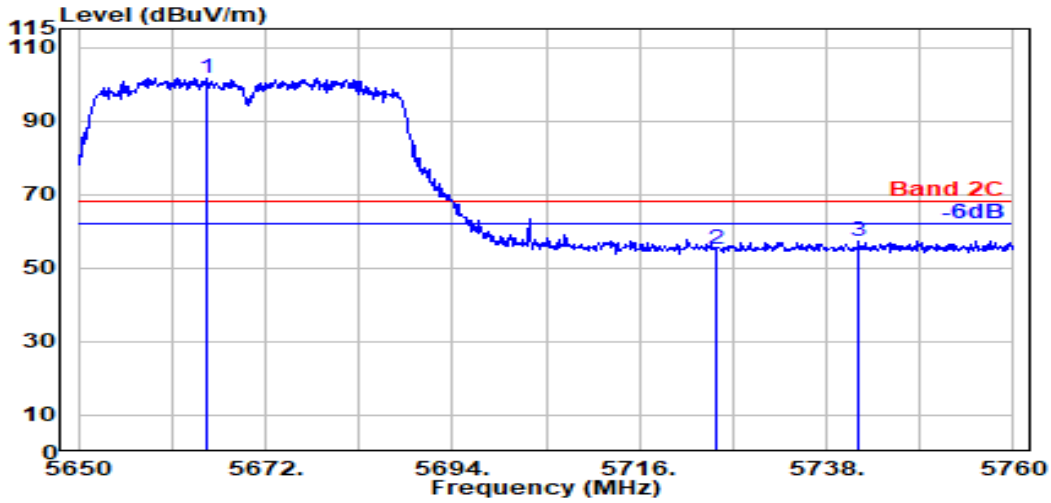

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.200	33.74	8.87	39.28	98.39	101.72	---	---	Peak
5725.000	33.60	8.93	39.29	52.06	55.30	68.20	12.90	Peak
5741.800	33.60	8.94	39.29	54.09	57.33	68.20	10.87	Peak

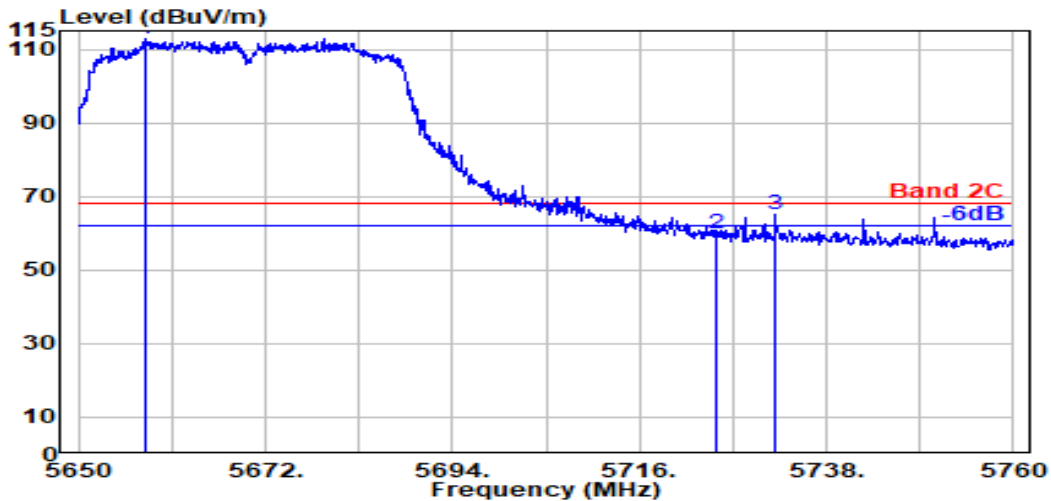


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.800	33.77	8.86	39.28	109.38	112.74	---	---	Peak
5725.000	33.60	8.93	39.29	56.67	59.90	68.20	8.30	Peak
5731.900	33.60	8.93	39.29	61.90	65.14	68.20	3.06	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

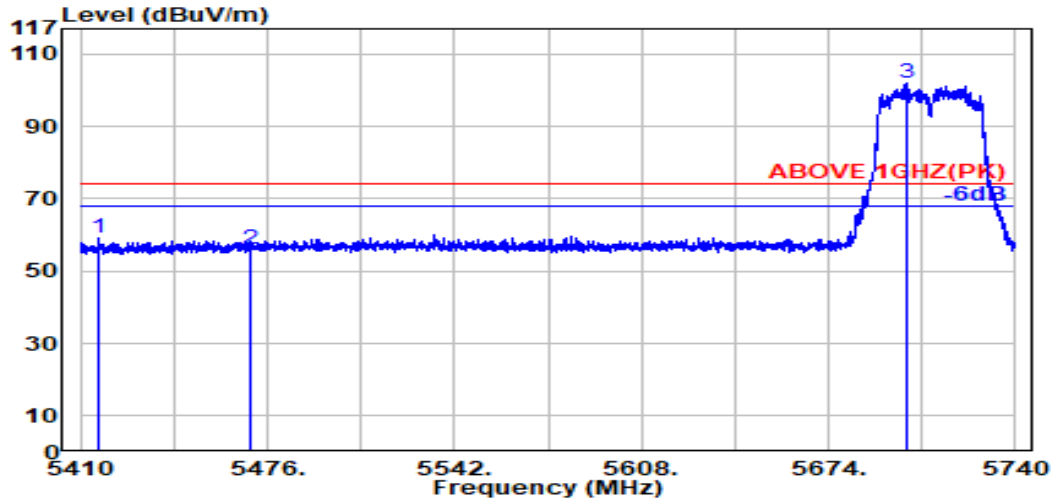

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.200	33.93	8.64	39.25	55.70	59.01	74.00	14.99	Peak
5470.000	34.04	8.69	39.25	52.51	55.98	74.00	18.02	Peak
@ 5701.700	33.60	8.90	39.29	98.87	102.09	---	---	Peak

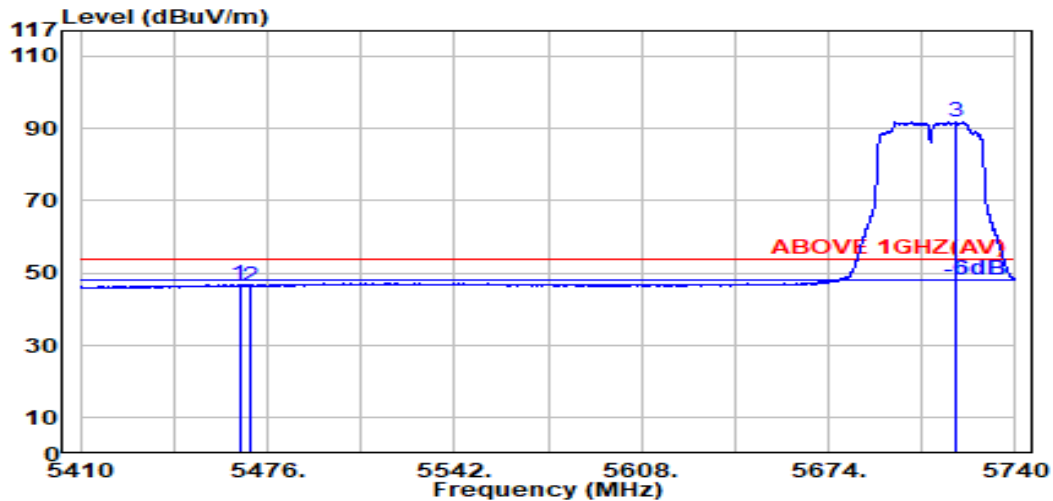


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.03	8.68	39.25	43.28	46.75	54.00	7.25	Average
5470.000	34.04	8.69	39.25	42.95	46.43	54.00	7.57	Average
@ 5718.800	33.60	8.92	39.29	88.62	91.85	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

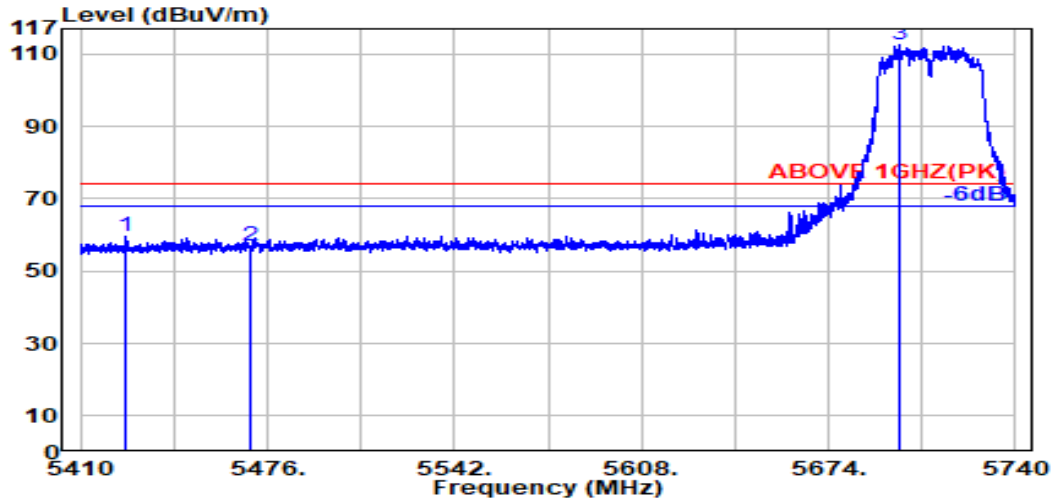

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.300	33.95	8.65	39.25	56.45	59.79	74.00	14.21	Peak
5470.000	34.04	8.69	39.25	53.58	57.05	74.00	16.95	Peak
@ 5698.900	33.60	8.90	39.29	109.16	112.38	---	---	Peak

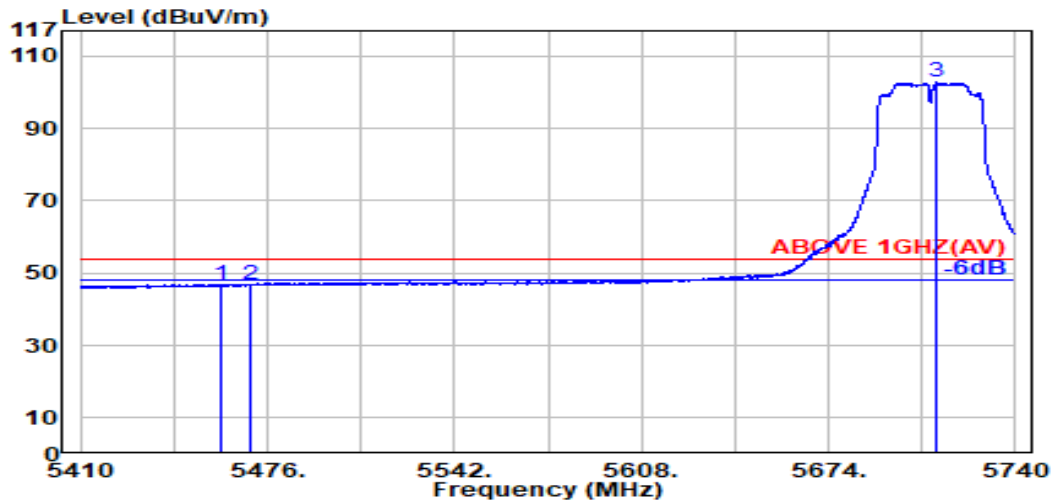


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.02	8.68	39.25	43.55	46.99	54.00	7.01	Average
5470.000	34.04	8.69	39.25	43.35	46.83	54.00	7.17	Average
@ 5712.300	33.60	8.91	39.29	99.48	102.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

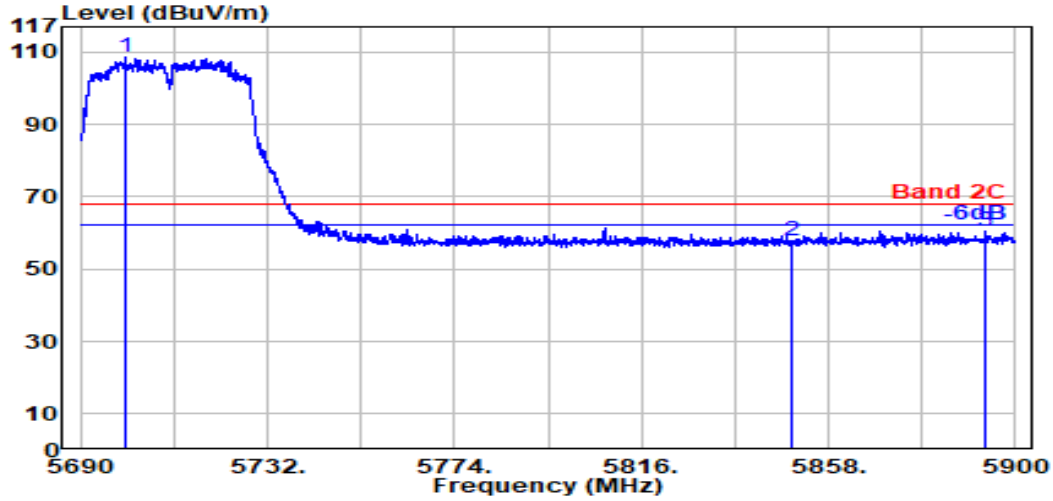

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.100	33.60	8.90	39.29	105.31	108.52	---	---	Peak
5850.000	33.90	9.04	39.31	54.19	57.81	68.20	10.39	Peak
5893.100	34.07	9.08	39.32	56.83	60.65	68.20	7.55	Peak

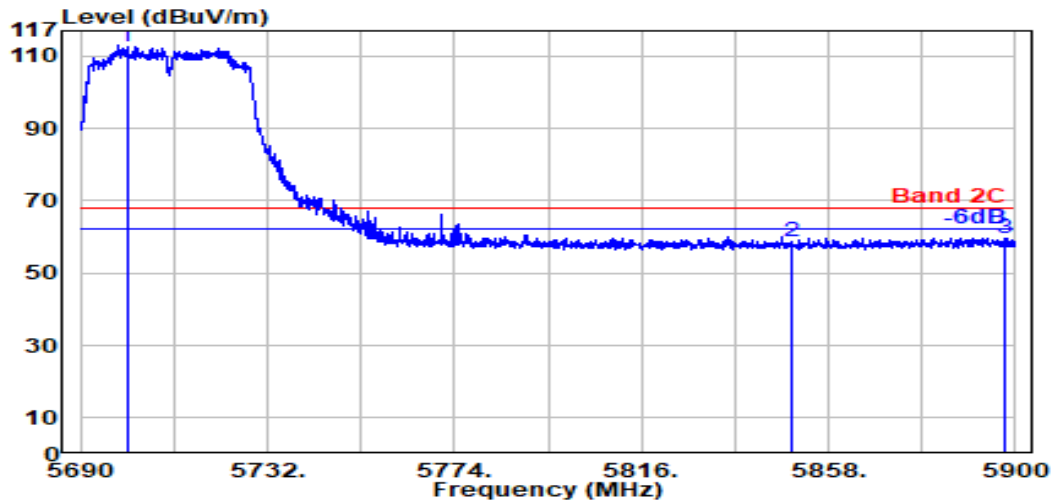


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.400	33.60	8.90	39.29	109.32	112.54	---	---	Peak
5850.000	33.90	9.04	39.31	55.01	58.64	68.20	9.56	Peak
5897.400	34.09	9.08	39.32	55.89	59.74	68.20	8.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

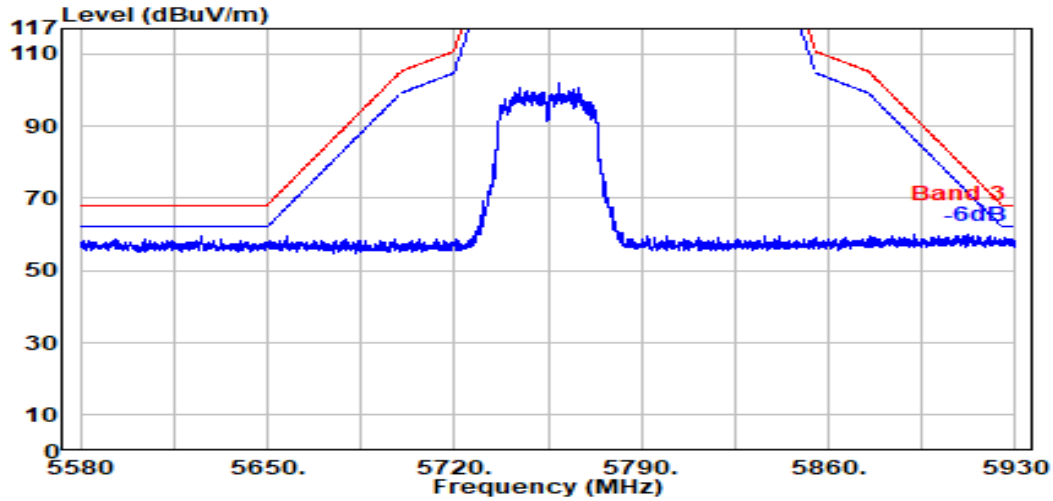


Antenna at Vertical Polarization

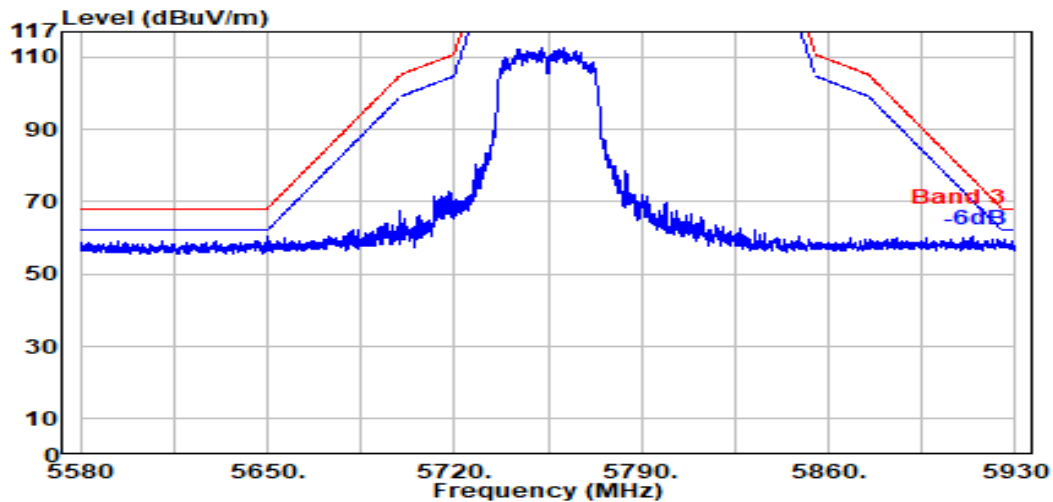


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

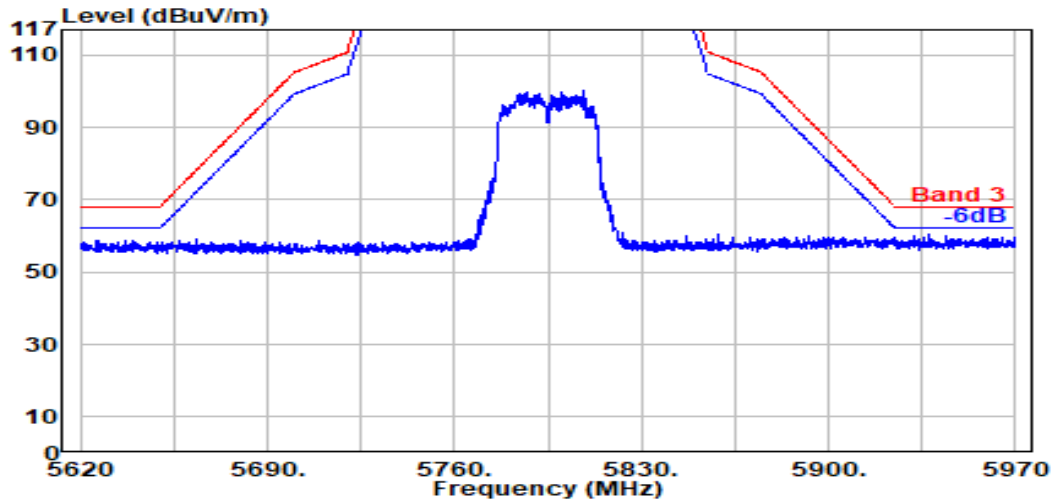

Antenna at Vertical Polarization

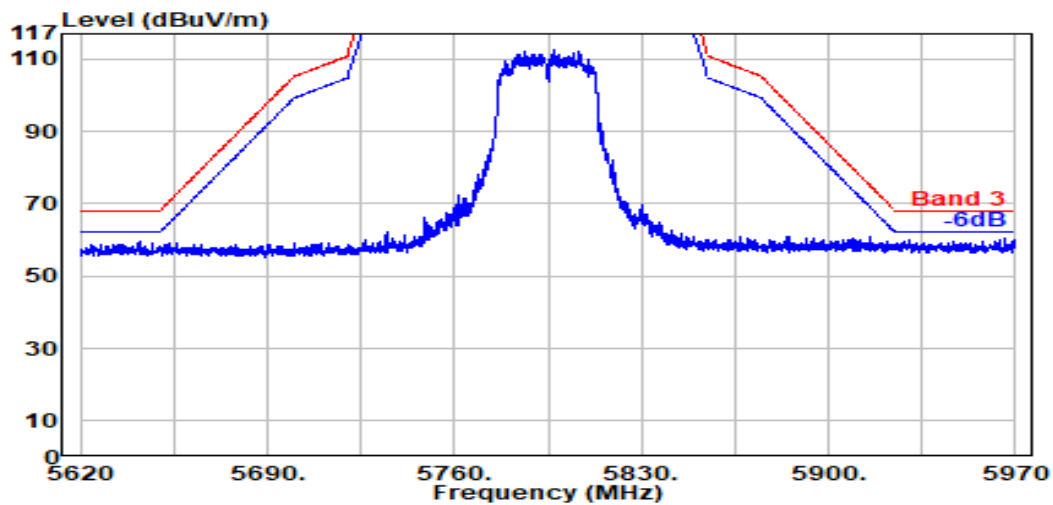


Mode	802.11n-HT40	U-NII Band	4
		Frequency	TX 5875MHz

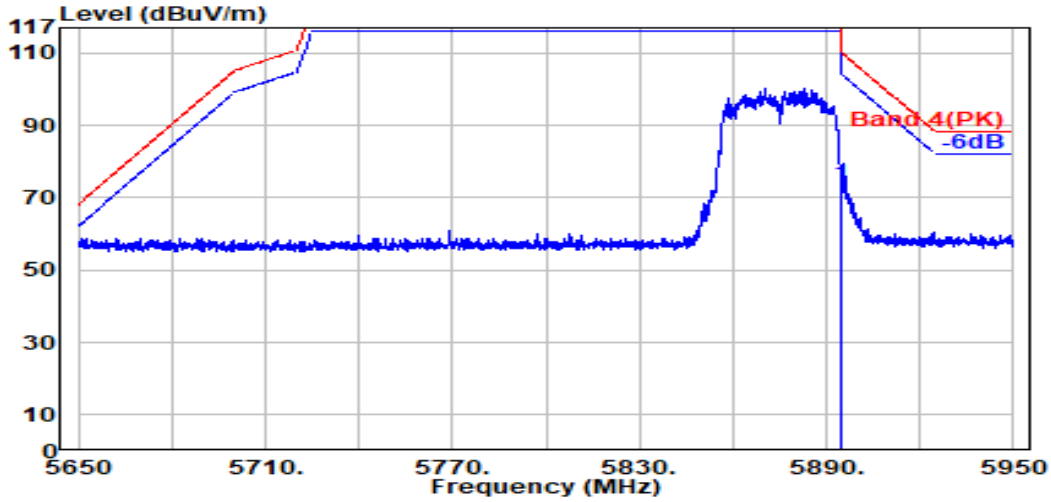

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	69.90	73.74	110.20	36.46	Peak

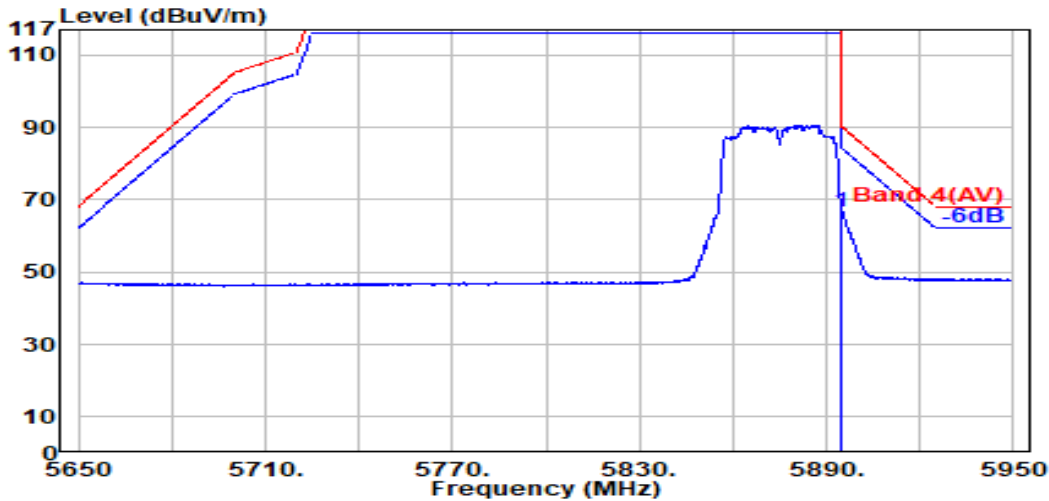


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	62.82	66.65	90.20	23.55	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT40	U-NII Band	4
		Frequency	TX 5875MHz

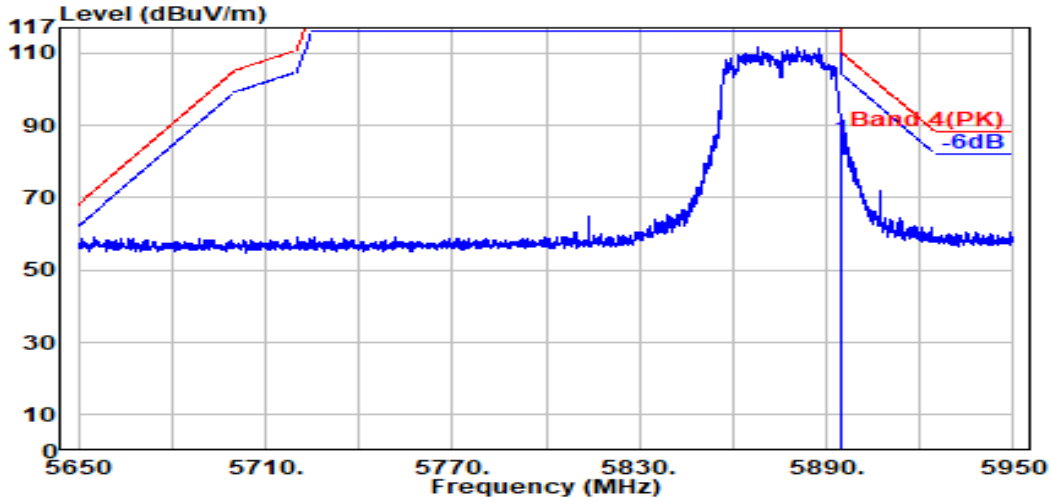

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	82.27	86.10	110.20	24.10	Peak

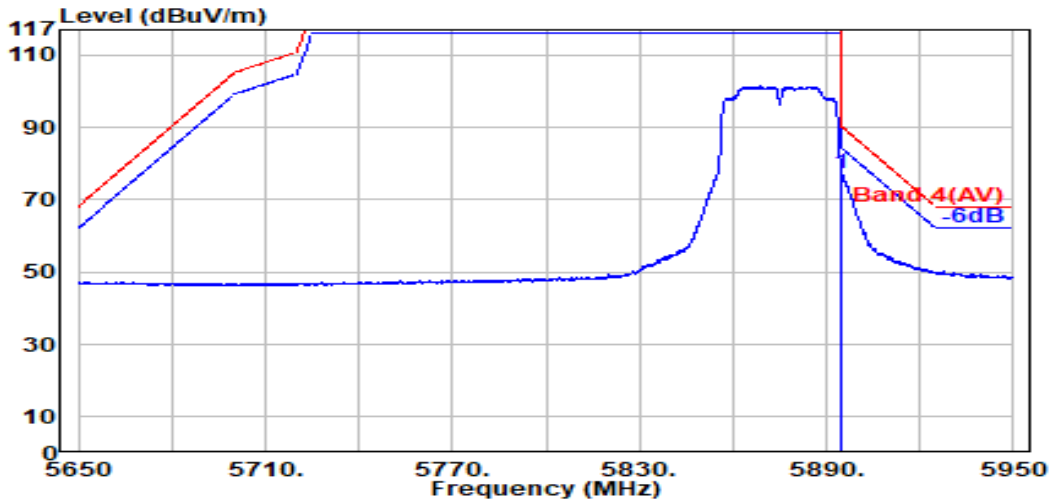


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	73.36	77.20	90.20	13.00	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

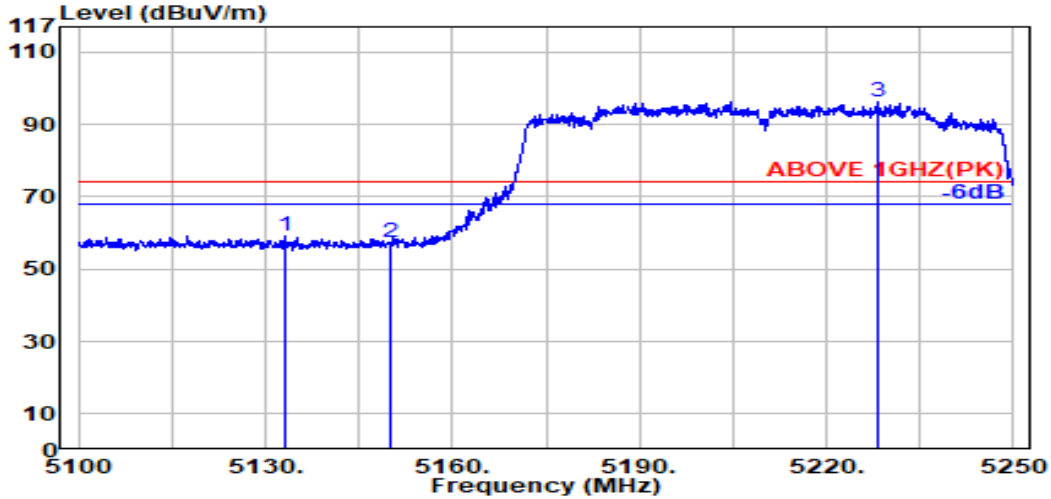

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.000	33.47	8.36	39.27	56.52	59.07	74.00	14.93	Peak
5150.000	33.50	8.37	39.27	54.66	57.26	74.00	16.74	Peak
@ 5228.100	33.74	8.45	39.27	93.23	96.16	---	---	Peak

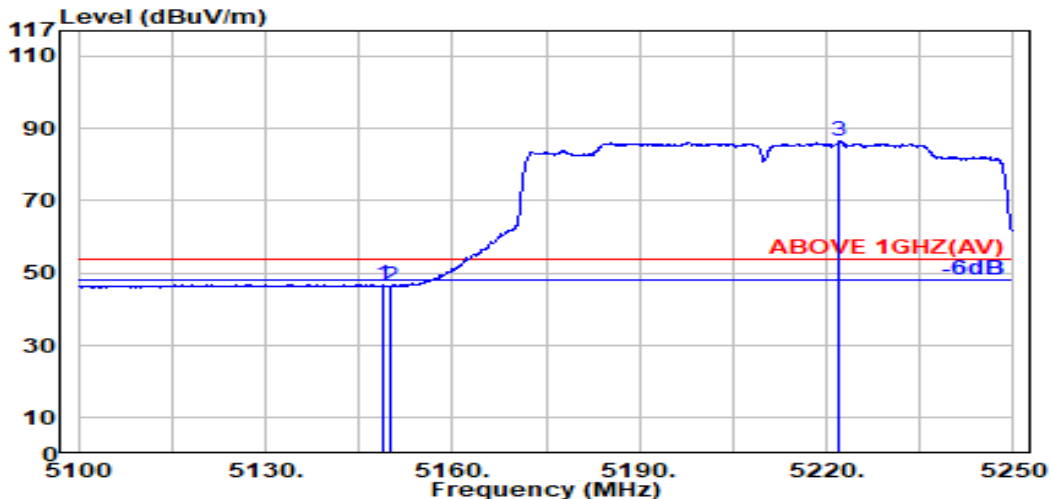


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.27	44.22	46.82	54.00	7.18	Average
5150.000	33.50	8.37	39.27	43.91	46.52	54.00	7.48	Average
@ 5221.900	33.76	8.45	39.27	83.39	86.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

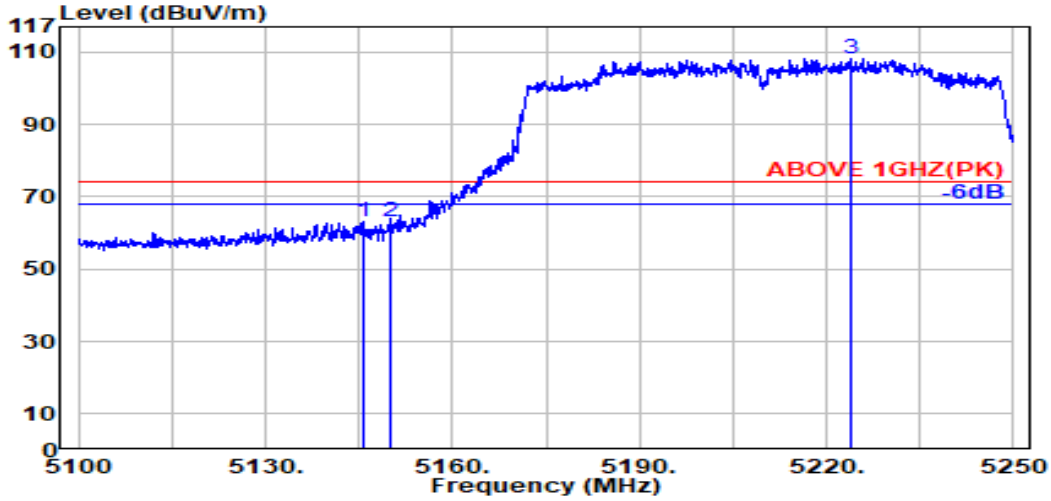

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.49	8.37	39.27	60.73	63.32	74.00	10.68	Peak
5150.000	33.50	8.37	39.27	60.68	63.29	74.00	10.71	Peak
@ 5224.000	33.75	8.45	39.27	105.20	108.13	---	---	Peak

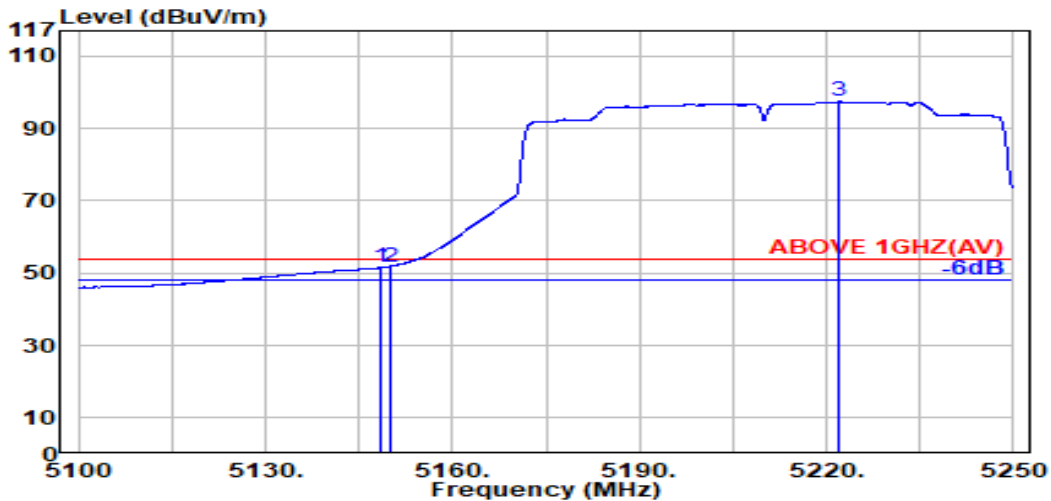


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.50	8.37	39.27	48.97	51.57	54.00	2.43	Average
5150.000	33.50	8.37	39.27	49.27	51.87	54.00	2.13	Average
@ 5221.900	33.76	8.45	39.27	94.60	97.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

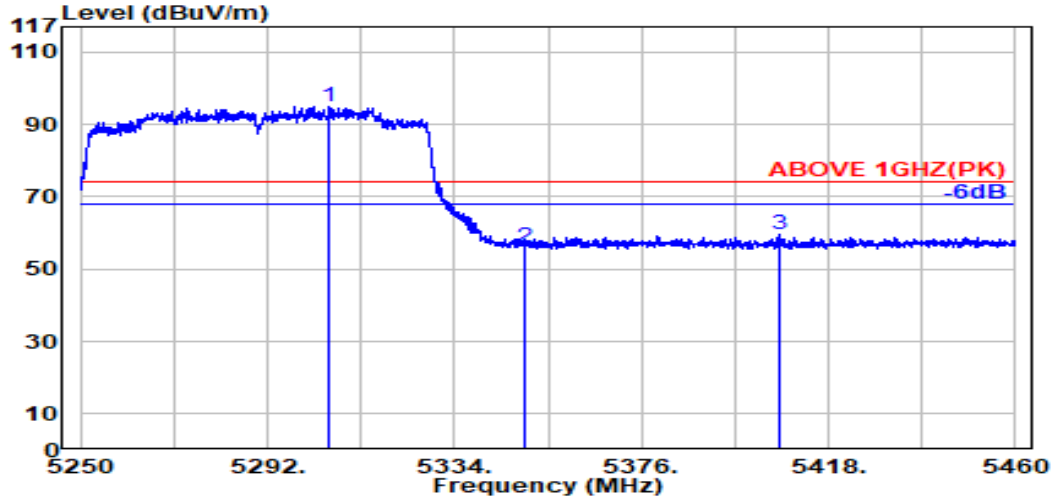

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.600	33.79	8.53	39.26	92.07	95.13	---	---	Peak
5350.000	33.70	8.57	39.26	53.22	56.23	74.00	17.77	Peak
5407.200	33.91	8.63	39.26	56.28	59.57	74.00	14.43	Peak

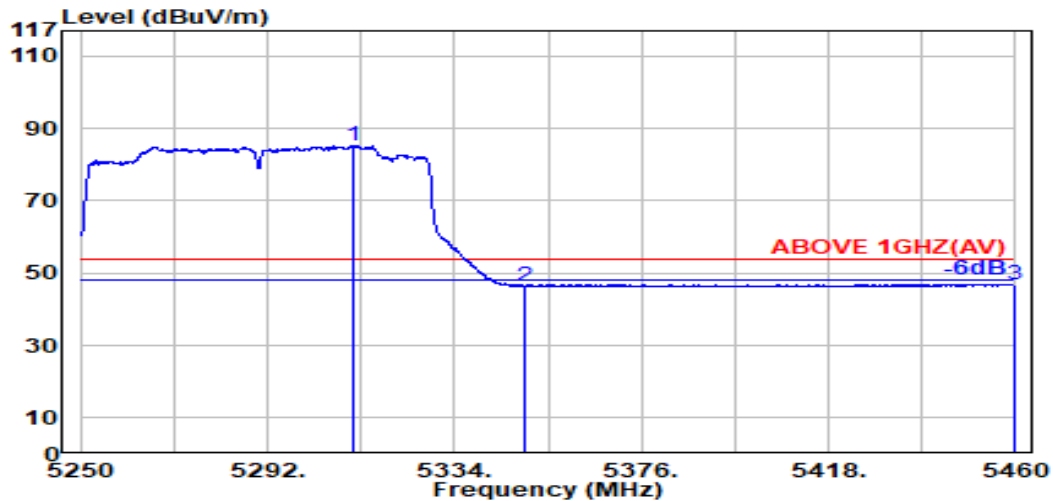


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.500	33.78	8.53	39.26	82.27	85.32	---	---	Average
5350.000	33.70	8.57	39.26	43.53	46.55	54.00	7.45	Average
5460.000	34.02	8.68	39.25	43.53	46.97	54.00	7.03	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

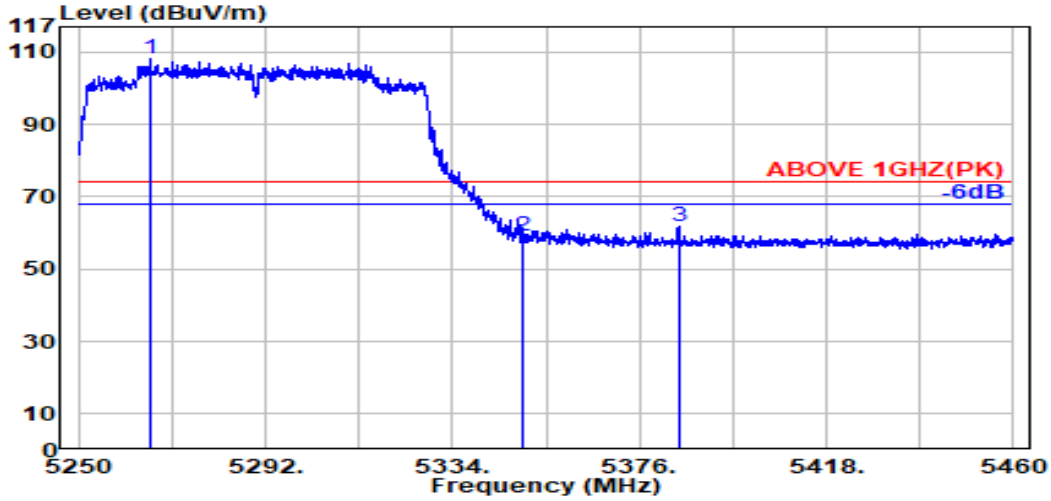

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.000	33.73	8.49	39.26	105.01	107.97	---	---	Peak
5350.000	33.70	8.57	39.26	56.15	59.16	74.00	14.84	Peak
5384.800	33.84	8.61	39.26	58.41	61.60	74.00	12.40	Peak

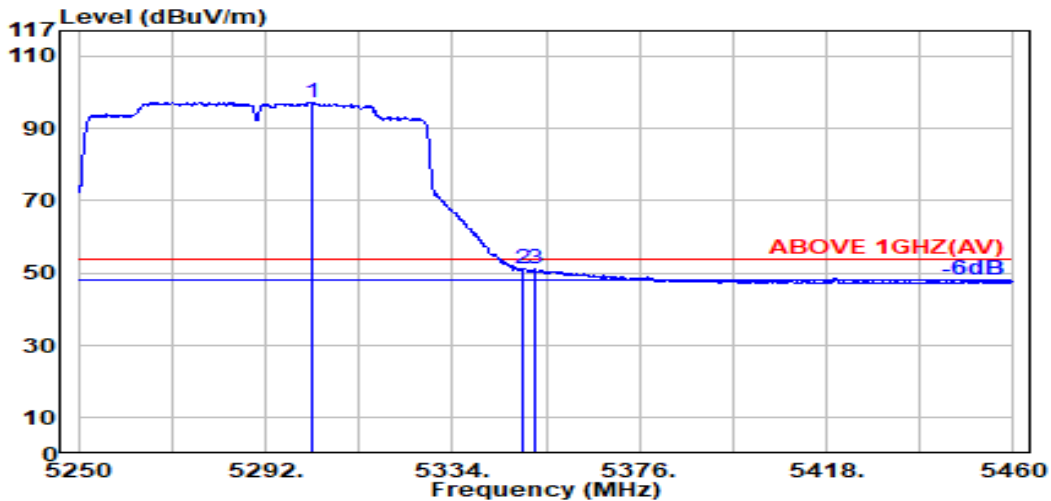


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.300	33.80	8.53	39.26	94.24	97.30	---	---	Average
5350.000	33.70	8.57	39.26	48.29	51.30	54.00	2.70	Average
5352.300	33.71	8.57	39.26	48.19	51.22	54.00	2.78	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

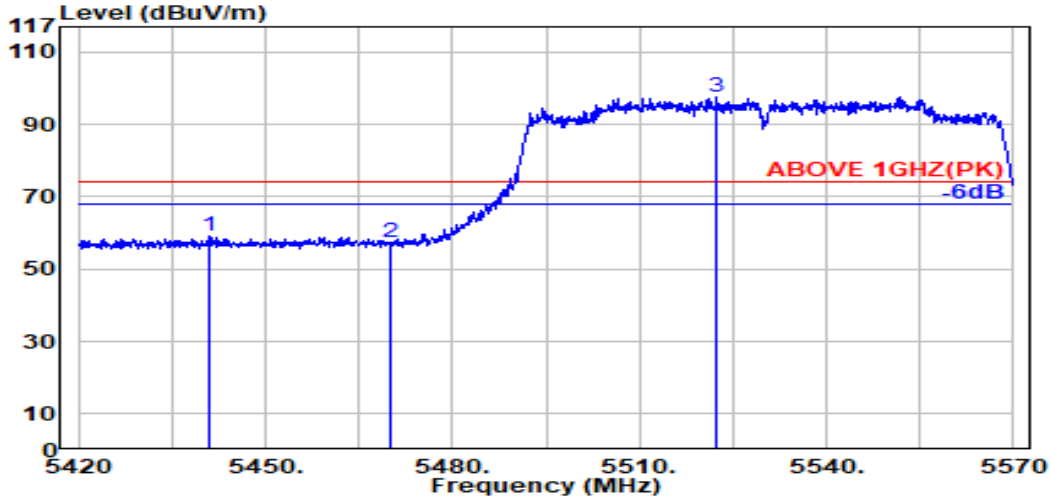

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.100	33.98	8.66	39.25	55.60	58.99	74.00	15.01	Peak
5470.000	34.04	8.69	39.25	53.95	57.43	74.00	16.57	Peak
@ 5522.400	34.06	8.74	39.25	94.03	97.57	---	---	Peak

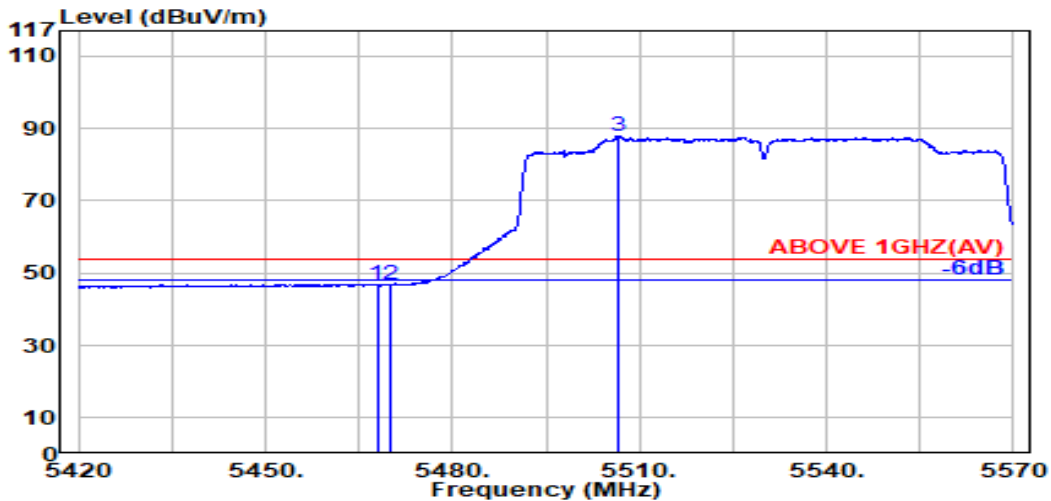


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.25	43.43	46.90	54.00	7.10	Average
5470.000	34.04	8.69	39.25	43.12	46.60	54.00	7.40	Average
@ 5506.500	34.09	8.72	39.25	84.46	88.02	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

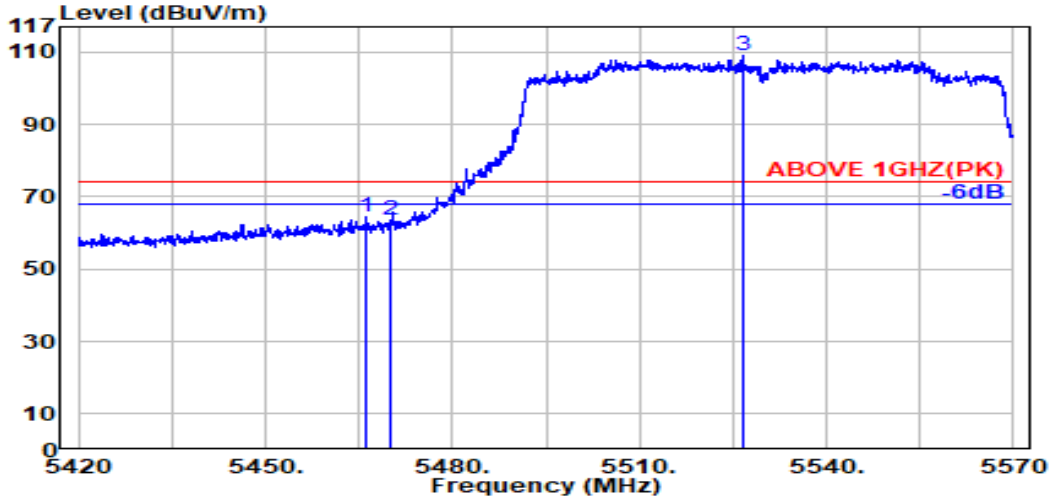

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.03	8.68	39.25	60.92	64.39	74.00	9.61	Peak
5470.000	34.04	8.69	39.25	60.28	63.76	74.00	10.24	Peak
@ 5526.500	34.05	8.74	39.25	105.50	109.03	---	---	Peak

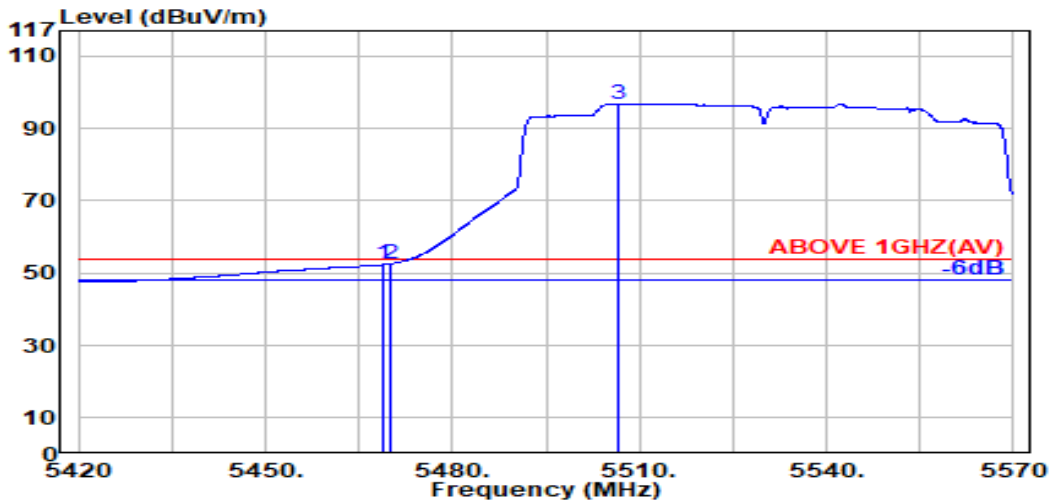


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.25	48.90	52.37	54.00	1.63	Average
5470.000	34.04	8.69	39.25	49.17	52.64	54.00	1.36	Average
@ 5506.700	34.09	8.72	39.25	93.29	96.85	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

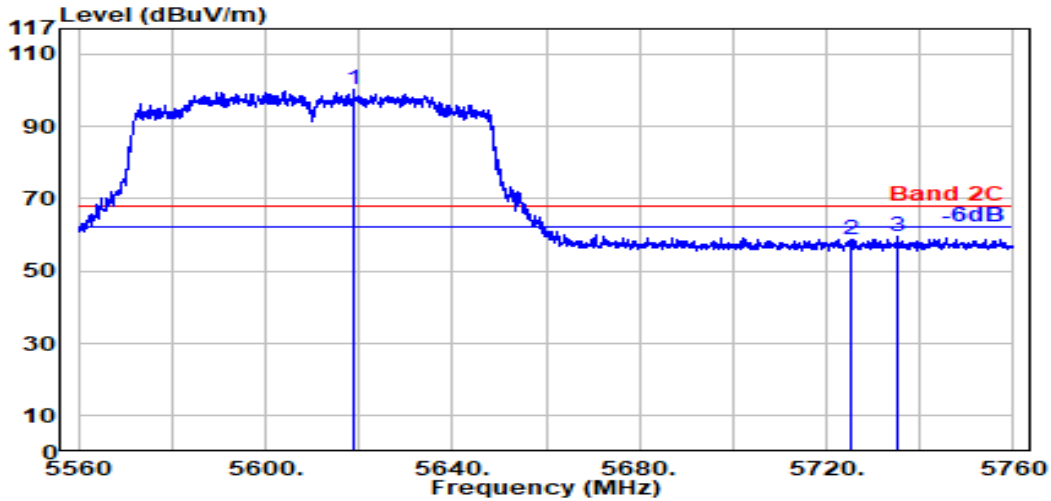

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.000	33.80	8.83	39.27	96.70	100.06	---	---	Peak
5725.000	33.60	8.93	39.29	55.30	58.53	68.20	9.67	Peak
5735.200	33.60	8.93	39.29	56.34	59.58	68.20	8.62	Peak

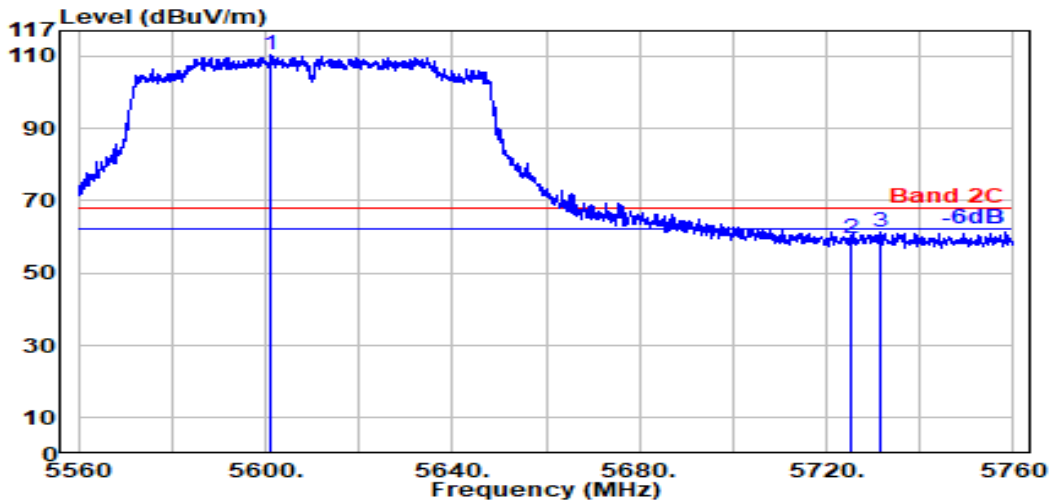


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5601.300	33.80	8.81	39.27	106.81	110.16	---	---	Peak
5725.000	33.60	8.93	39.29	56.40	59.64	68.20	8.56	Peak
5731.300	33.60	8.93	39.29	58.24	61.48	68.20	6.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

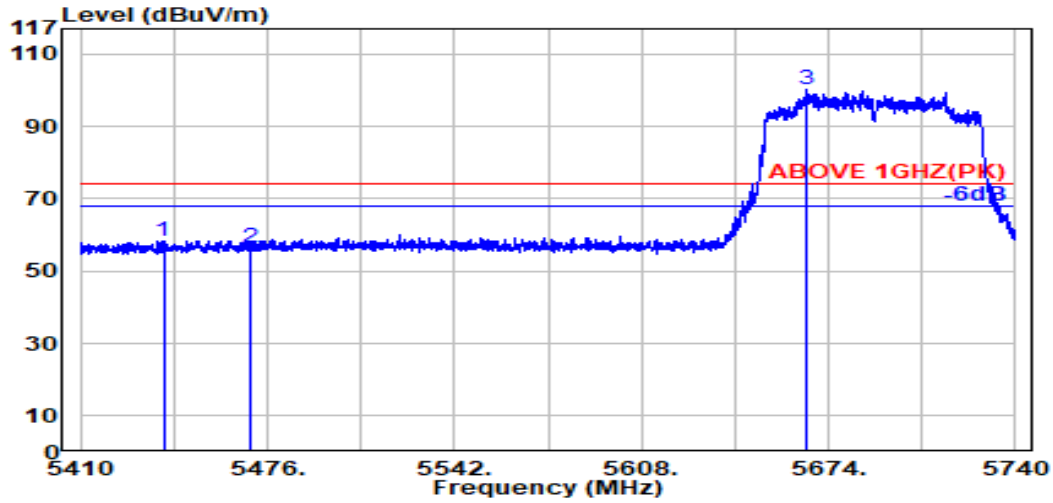

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.300	33.98	8.66	39.25	55.09	58.48	74.00	15.52	Peak
5470.000	34.04	8.69	39.25	53.08	56.55	74.00	17.45	Peak
@ 5666.300	33.73	8.87	39.28	96.71	100.04	---	---	Peak

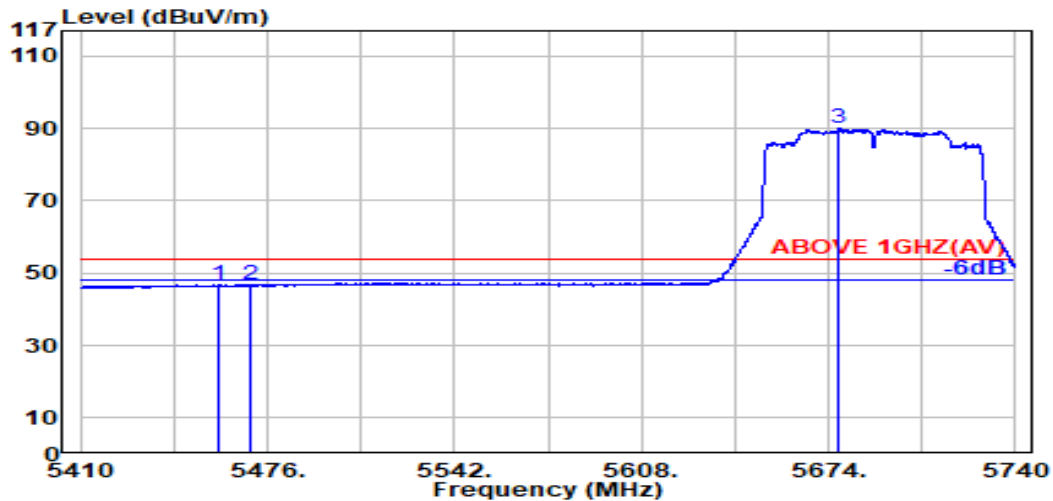


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.02	8.68	39.25	43.41	46.85	54.00	7.15	Average
5470.000	34.04	8.69	39.25	43.23	46.70	54.00	7.30	Average
@ 5677.800	33.69	8.88	39.28	86.76	90.04	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

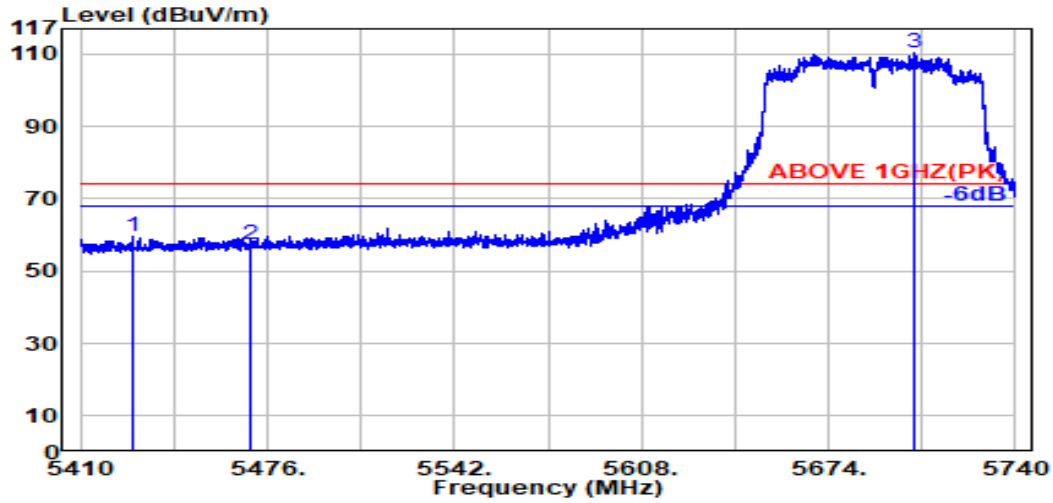

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.100	33.96	8.65	39.25	56.04	59.39	74.00	14.61	Peak
5470.000	34.04	8.69	39.25	53.72	57.19	74.00	16.81	Peak
@ 5704.100	33.60	8.91	39.29	107.31	110.53	---	---	Peak

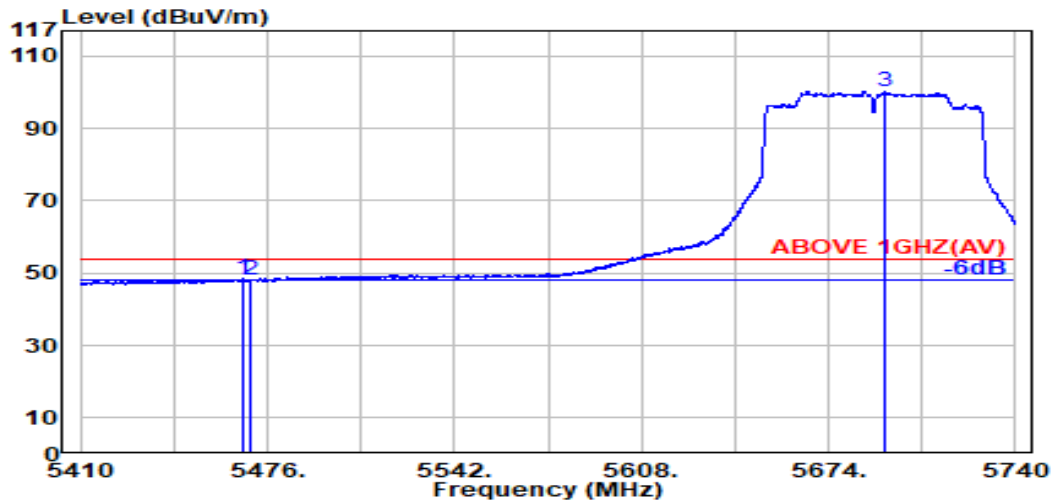


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.25	45.06	48.53	54.00	5.47	Average
5470.000	34.04	8.69	39.25	44.55	48.03	54.00	5.97	Average
@ 5693.600	33.63	8.90	39.29	97.00	100.24	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

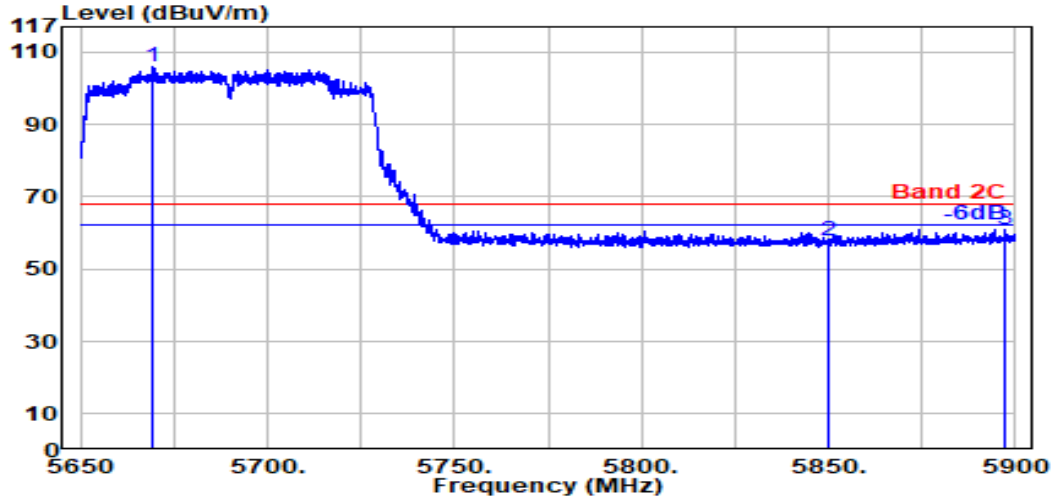

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5669.071	33.72	8.87	39.28	102.75	106.07	---	---	Peak
5850.000	33.90	9.04	39.31	53.99	57.62	68.20	10.58	Peak
5897.286	34.09	9.08	39.32	57.30	61.15	68.20	7.05	Peak

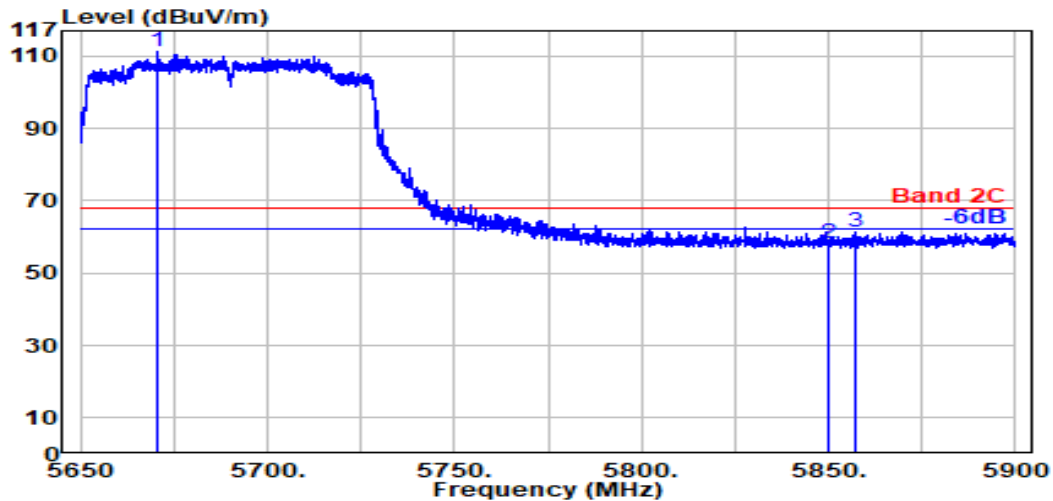


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5670.786	33.72	8.88	39.28	107.80	111.11	---	---	Peak
5850.000	33.90	9.04	39.31	54.79	58.42	68.20	9.78	Peak
5857.357	33.93	9.04	39.32	57.63	61.29	68.20	6.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

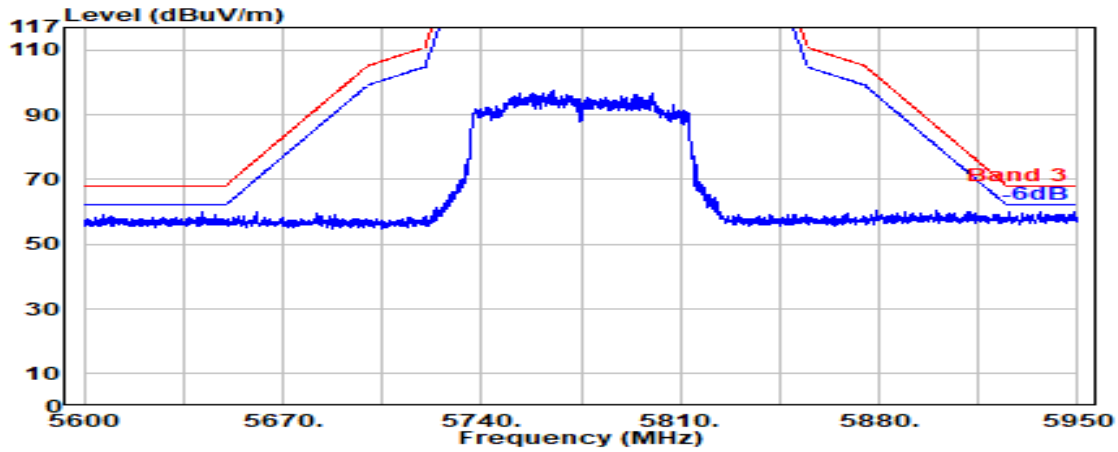

Antenna at Vertical Polarization

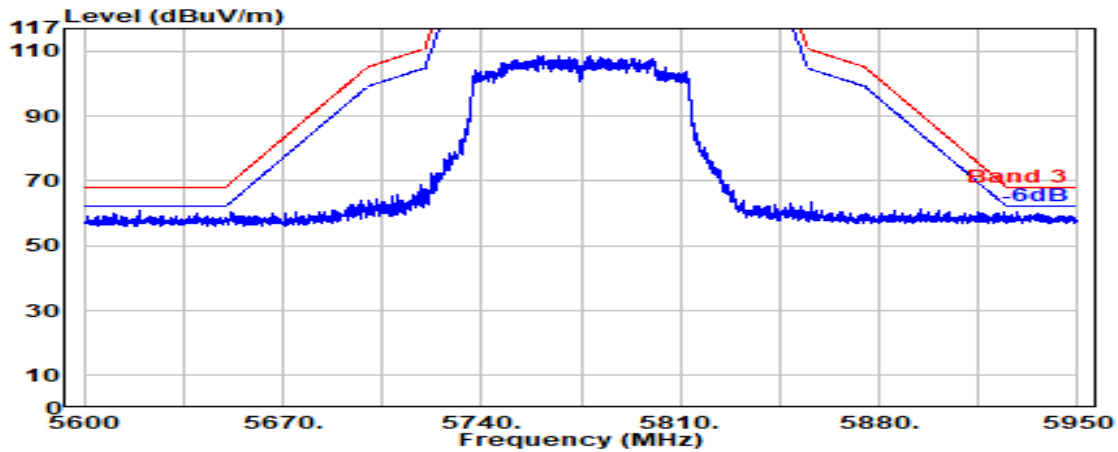


Mode	802.11ac-VHT80	U-NII Band	4
		Frequency	TX 5855MHz

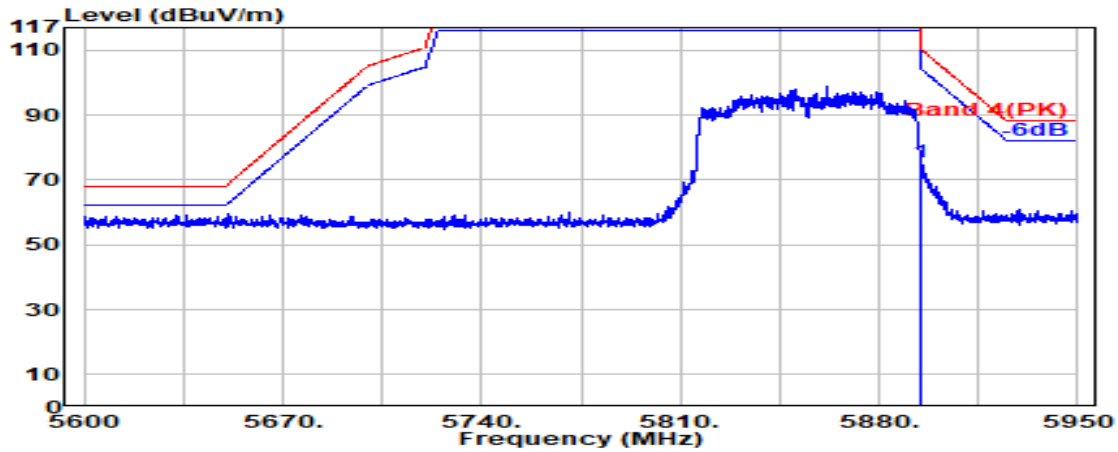

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	71.83	75.67	110.16	34.49	Peak

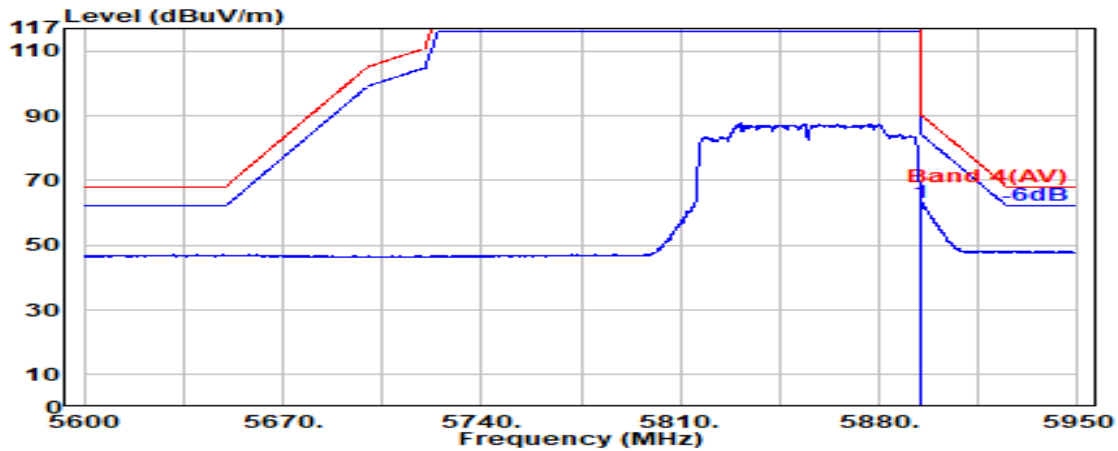


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	59.37	63.21	90.16	26.95	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT80	U-NII Band	4
		Frequency	TX 5855MHz

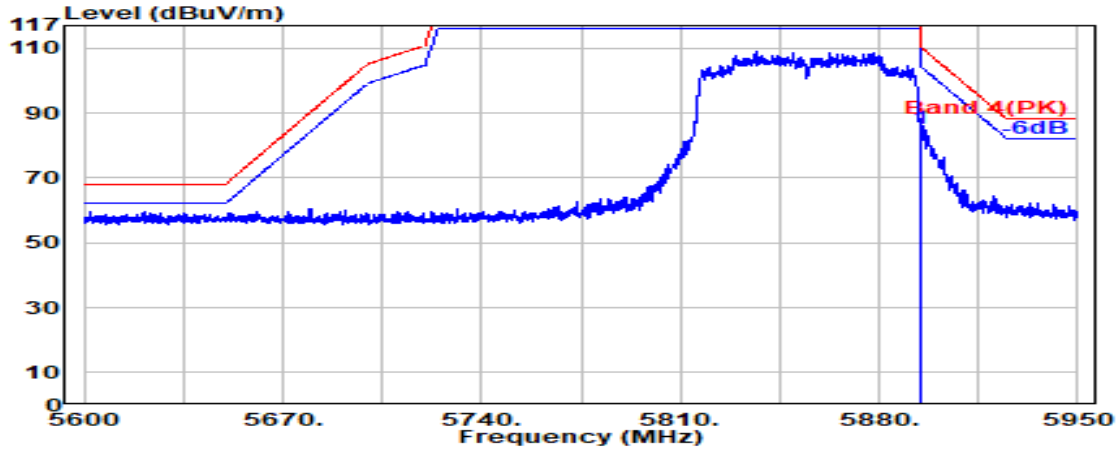

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	81.23	85.06	110.16	25.10	Peak

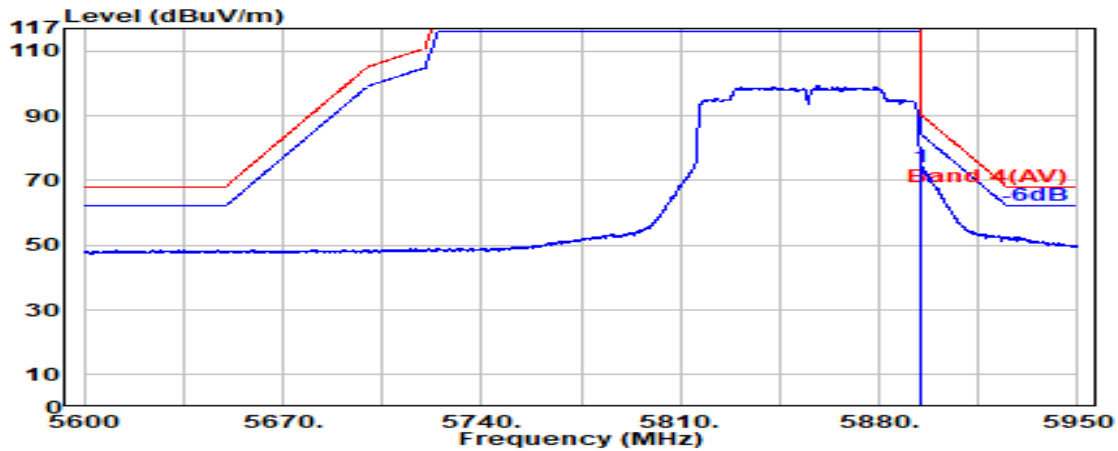


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	70.37	74.21	90.16	15.95	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

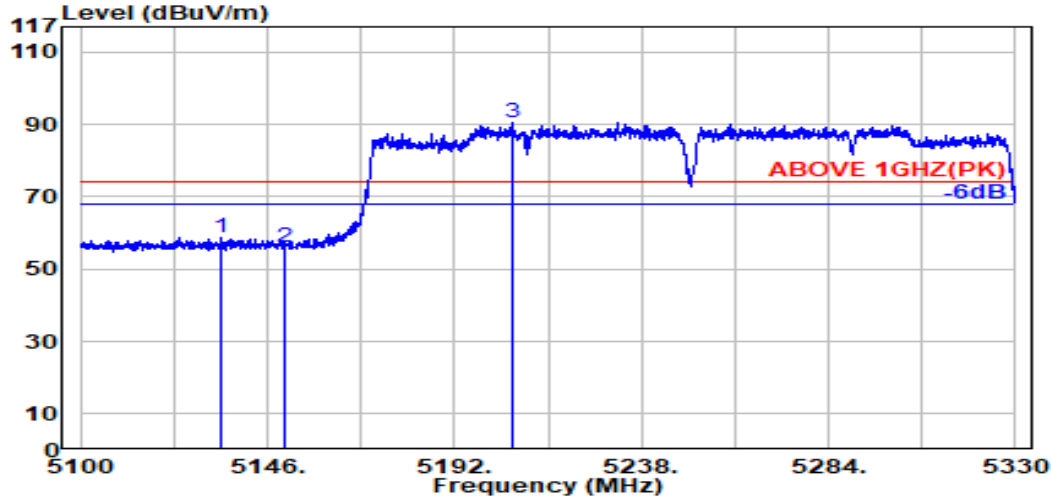

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.700	33.47	8.36	39.27	56.21	58.77	74.00	15.23	Peak
5150.000	33.50	8.37	39.27	53.57	56.18	74.00	17.82	Peak
@ 5206.000	33.79	8.43	39.27	87.40	90.35	---	---	Peak

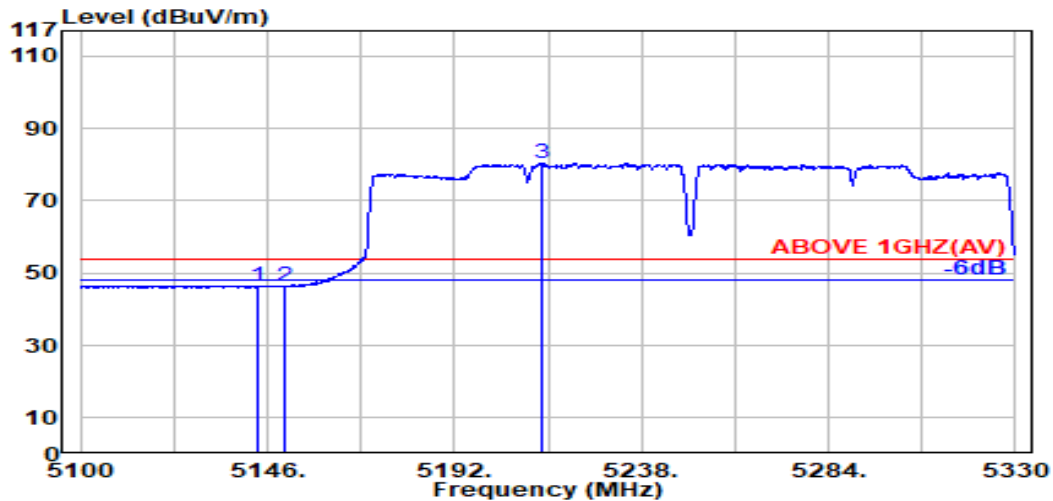


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.900	33.49	8.37	39.27	43.99	46.57	54.00	7.43	Average
5150.000	33.50	8.37	39.27	43.71	46.31	54.00	7.69	Average
@ 5213.600	33.77	8.44	39.27	77.40	80.34	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

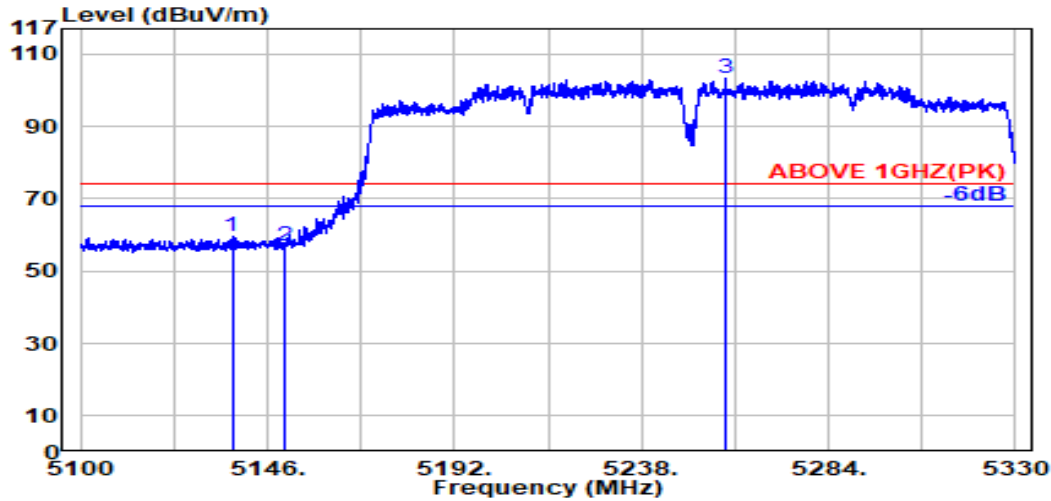

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.300	33.47	8.36	39.27	57.06	59.62	74.00	14.38	Peak
5150.000	33.50	8.37	39.27	54.21	56.81	74.00	17.19	Peak
@ 5258.500	33.72	8.48	39.26	100.23	103.17	---	---	Peak

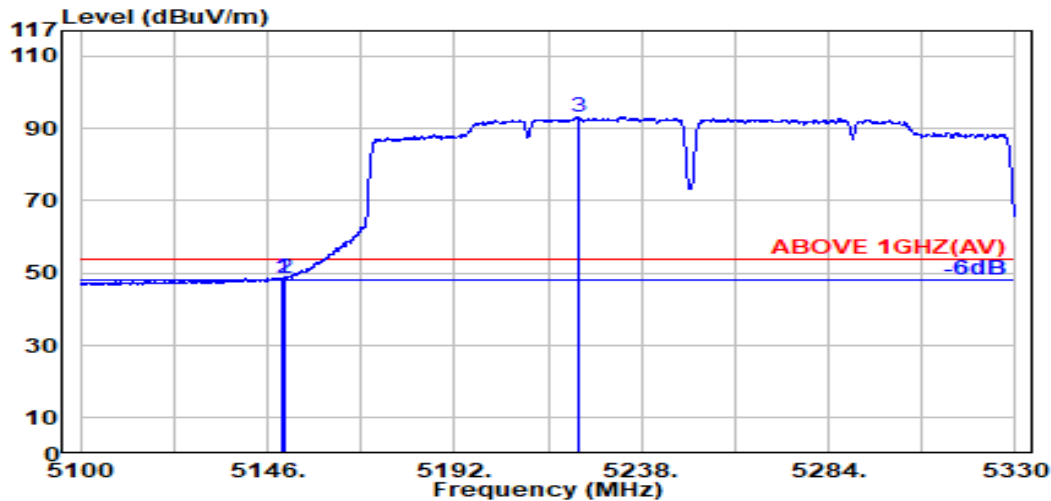


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.27	46.15	48.76	54.00	5.24	Average
5150.000	33.50	8.37	39.27	45.97	48.57	54.00	5.43	Average
@ 5222.300	33.76	8.45	39.27	90.44	93.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

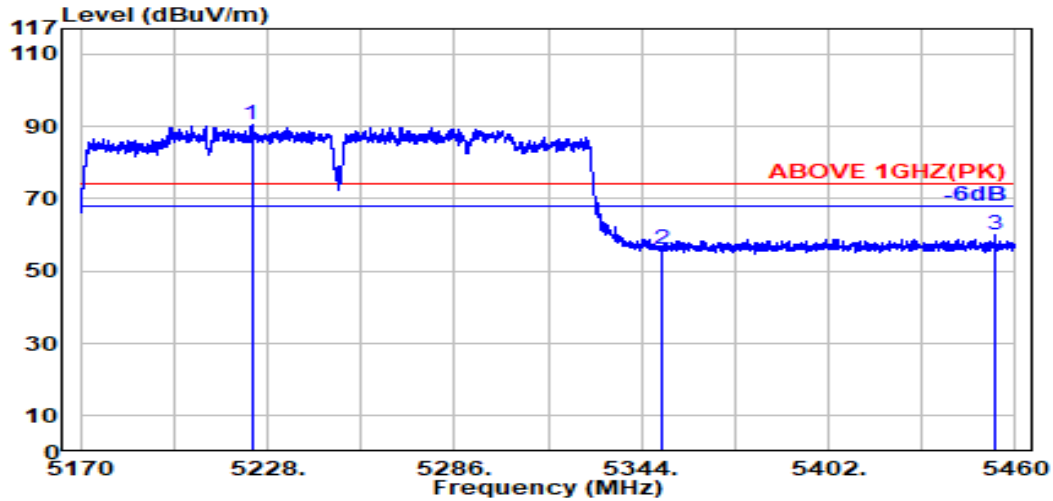

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5223.100	33.75	8.45	39.27	87.57	90.51	---	---	Peak
5350.000	33.70	8.57	39.26	53.16	56.17	74.00	17.83	Peak
5453.800	34.01	8.67	39.25	56.58	60.00	74.00	14.00	Peak

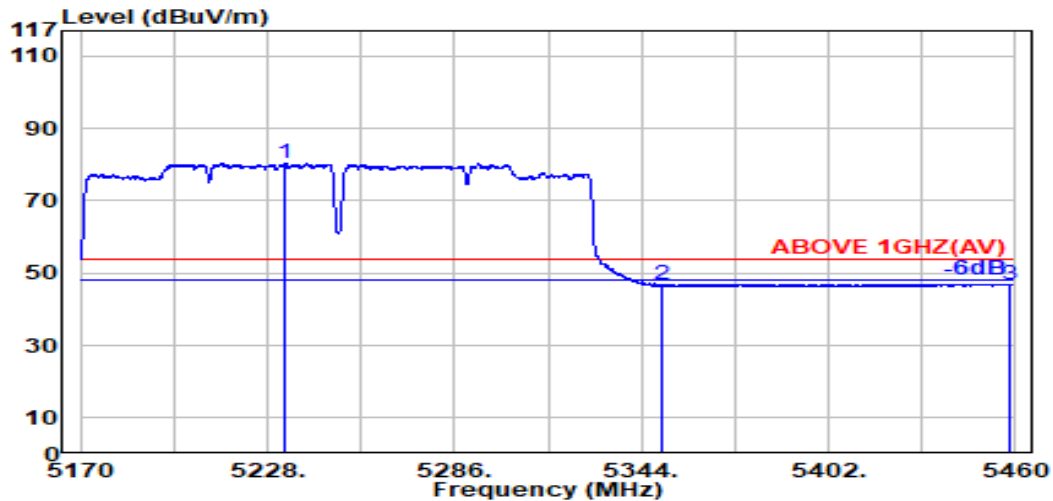


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.600	33.73	8.46	39.27	77.50	80.42	---	---	Average
5350.000	33.70	8.57	39.26	43.69	46.70	54.00	7.30	Average
5458.200	34.02	8.68	39.25	43.58	47.02	54.00	6.98	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

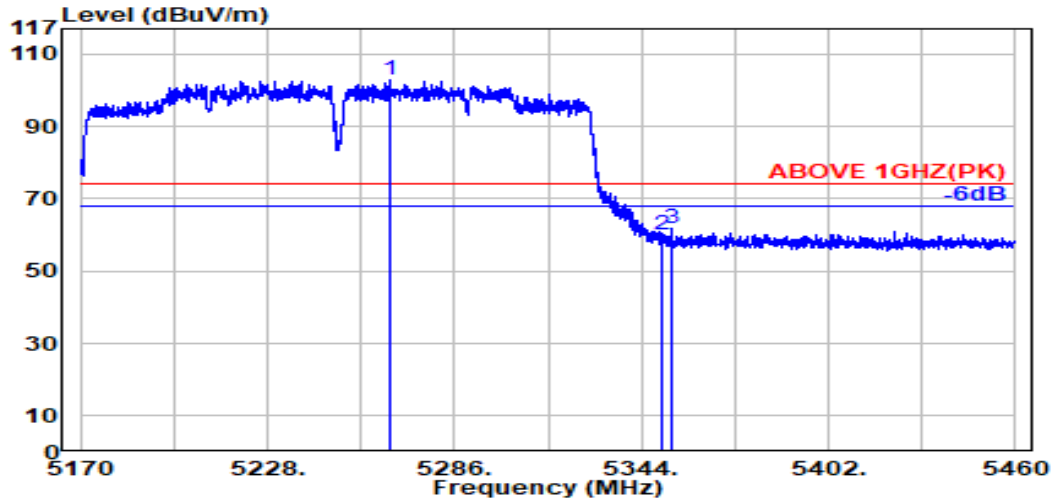

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.800	33.73	8.49	39.26	100.02	102.98	---	---	Peak
5350.000	33.70	8.57	39.26	56.84	59.85	74.00	14.15	Peak
5353.400	33.71	8.58	39.26	58.83	61.87	74.00	12.13	Peak

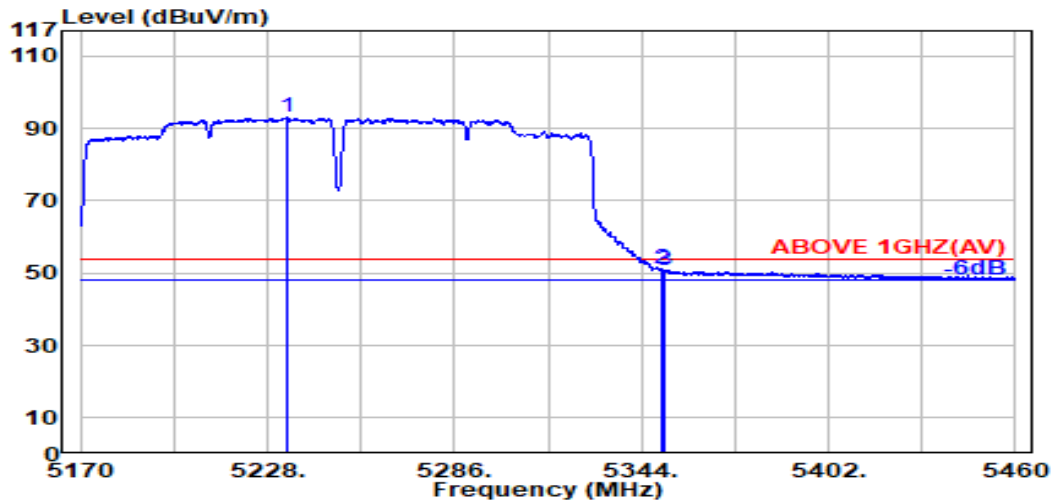


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.900	33.73	8.46	39.27	90.04	92.96	---	---	Average
5350.000	33.70	8.57	39.26	48.17	51.18	54.00	2.82	Average
5350.900	33.70	8.57	39.26	47.77	50.79	54.00	3.21	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

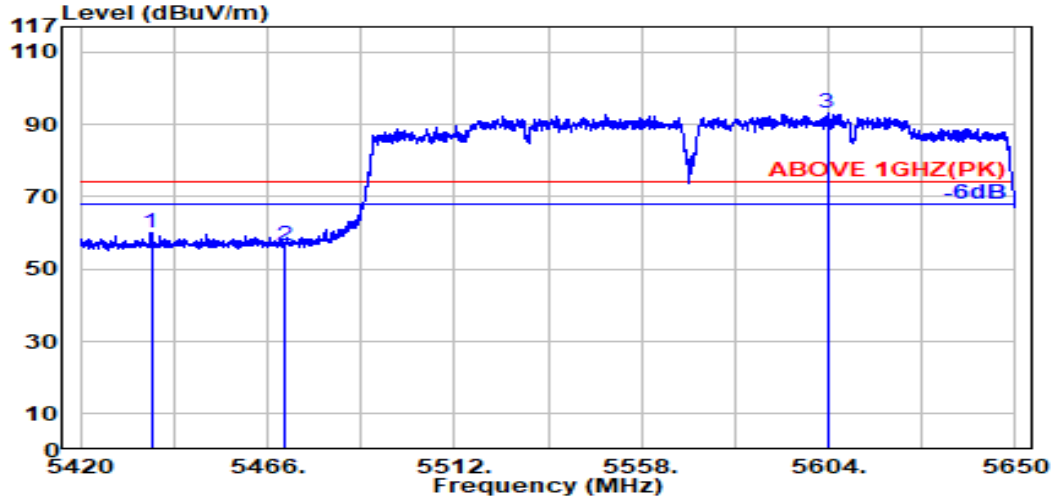

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.400	33.97	8.66	39.25	56.72	60.10	74.00	13.90	Peak
5470.000	34.04	8.69	39.25	53.00	56.48	74.00	17.52	Peak
@ 5603.700	33.80	8.81	39.27	89.82	93.16	---	---	Peak

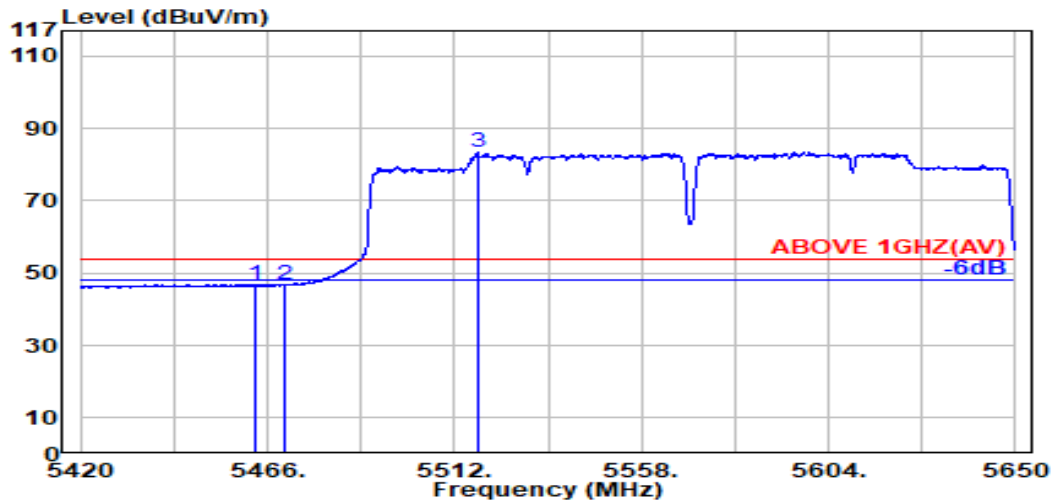


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.03	8.68	39.25	43.39	46.84	54.00	7.16	Average
5470.000	34.04	8.69	39.25	43.23	46.70	54.00	7.30	Average
@ 5517.800	34.06	8.73	39.25	79.79	83.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

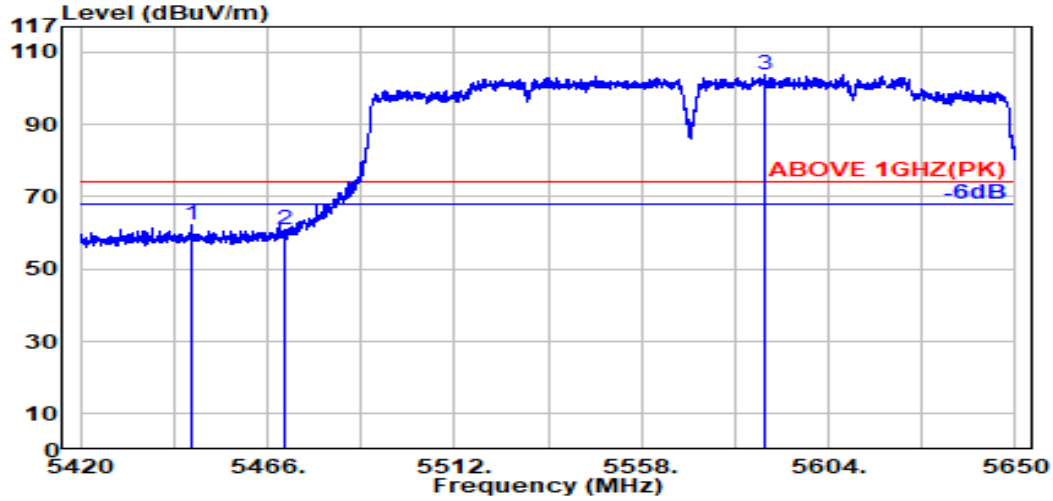

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.400	33.99	8.67	39.25	58.76	62.17	74.00	11.83	Peak
5470.000	34.04	8.69	39.25	57.51	60.98	74.00	13.02	Peak
@ 5588.400	33.85	8.80	39.27	100.45	103.83	---	---	Peak

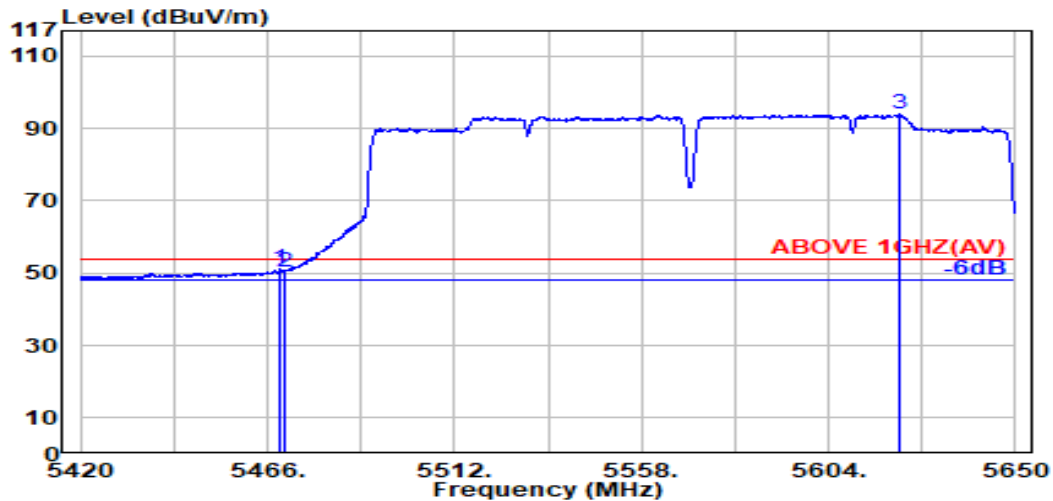


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.04	8.69	39.25	47.54	51.02	54.00	2.98	Average
5470.000	34.04	8.69	39.25	46.83	50.31	54.00	3.69	Average
@ 5621.700	33.80	8.83	39.27	90.48	93.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

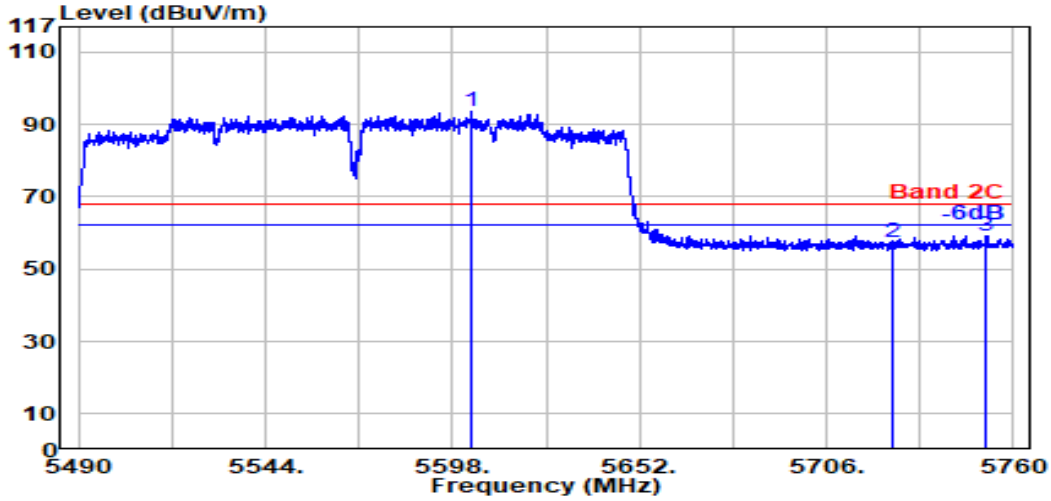

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5603.300	33.80	8.81	39.27	90.18	93.52	---	---	Peak
5725.000	33.60	8.93	39.29	53.98	57.21	68.20	10.99	Peak
5752.300	33.61	8.95	39.30	56.04	59.31	68.20	8.89	Peak

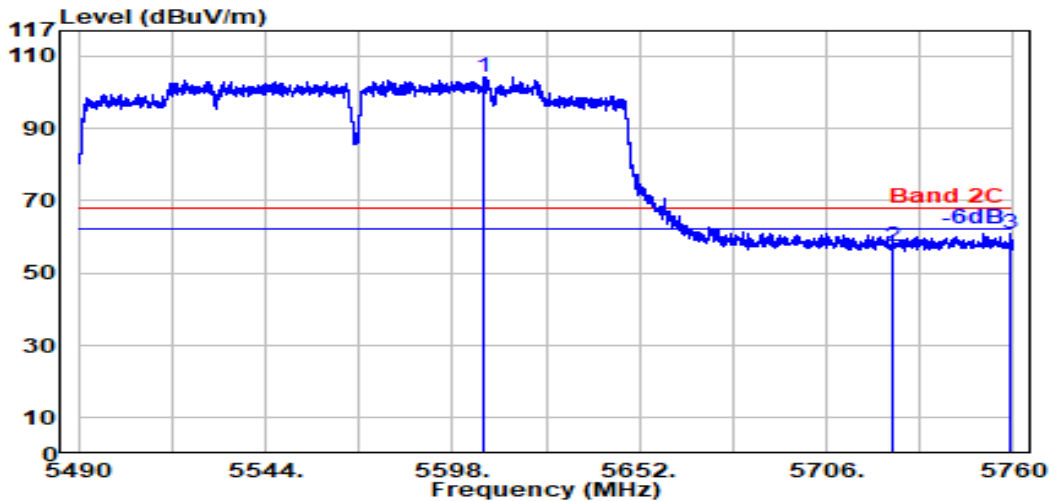


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.300	33.80	8.82	39.27	101.02	104.37	---	---	Peak
5725.000	33.60	8.93	39.29	53.95	57.19	68.20	11.01	Peak
5759.000	33.64	8.96	39.30	57.67	60.97	68.20	7.23	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ac-VHT60	U-NII Band	4
		Frequency	TX 5815MHz

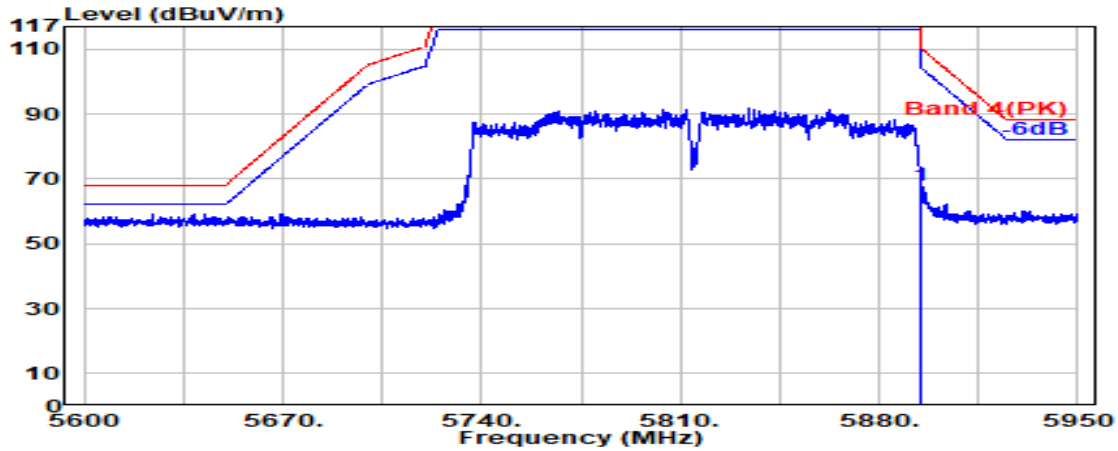

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	64.02	67.85	110.16	42.31	Peak

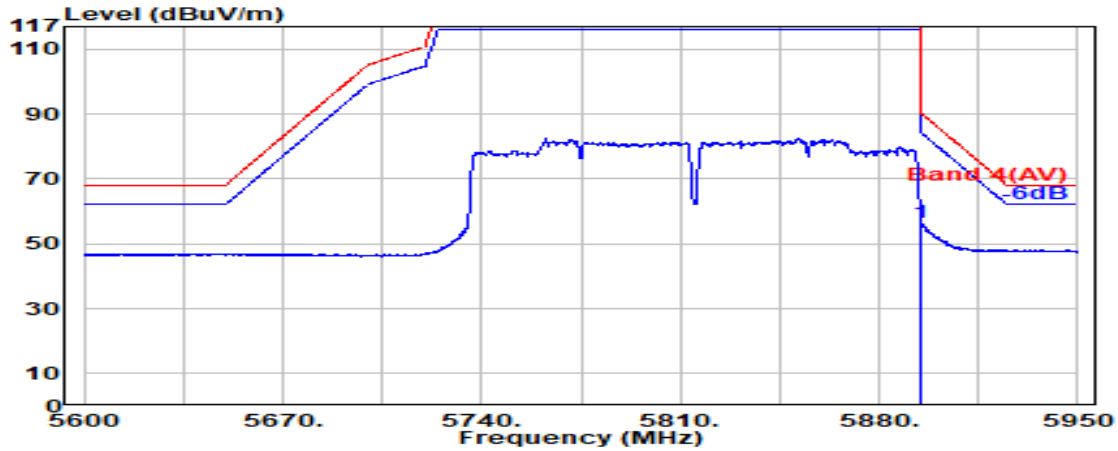


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	52.73	56.57	90.16	33.59	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT60	U-NII Band	4
		Frequency	TX 5815MHz

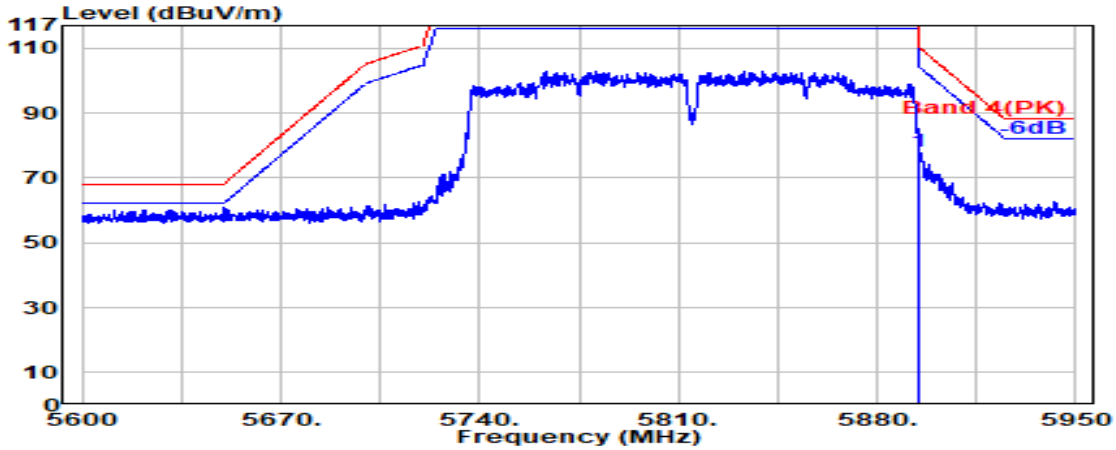

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	74.26	78.09	110.16	32.07	Peak

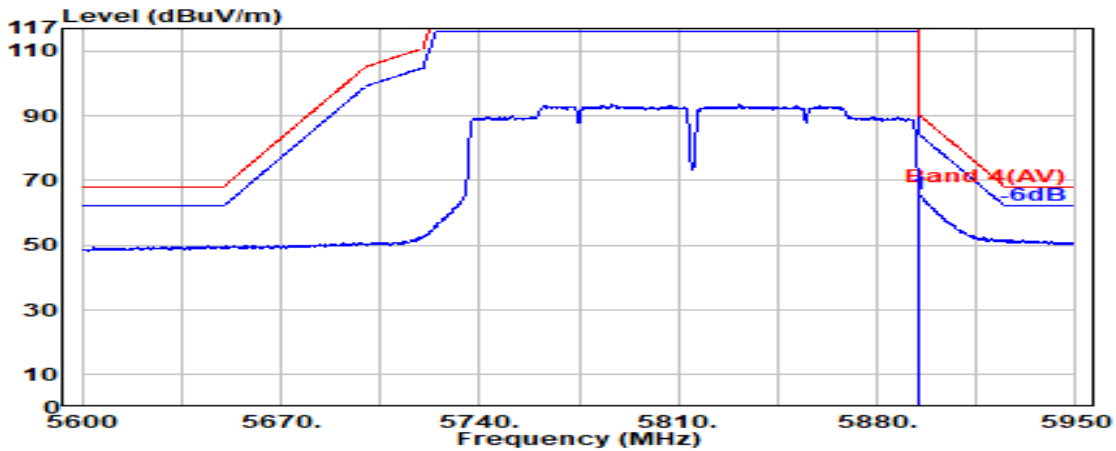

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	62.03	65.86	90.16	24.30	Average

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.