



Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

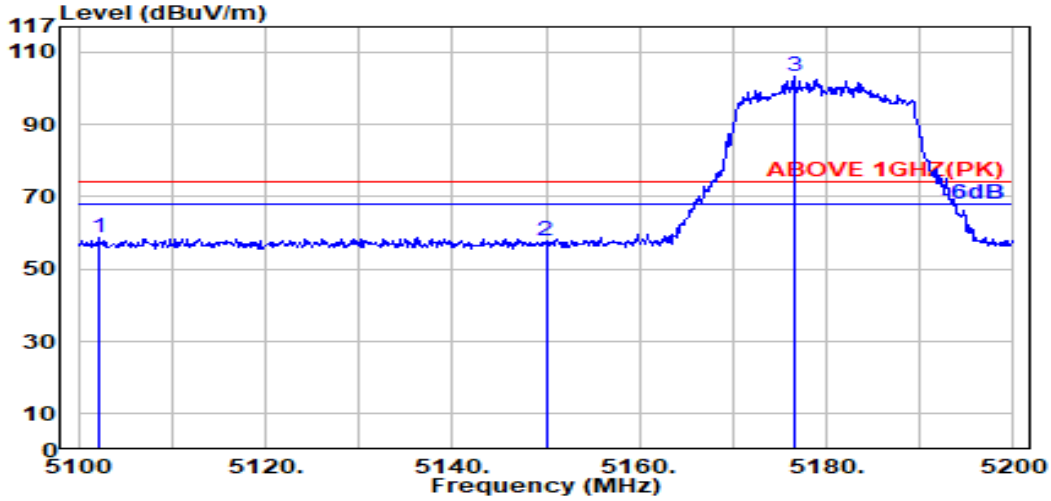

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.200	33.40	8.33	39.27	56.20	58.66	74.00	15.34	Peak
5150.000	33.50	8.37	39.27	55.16	57.76	74.00	16.24	Peak
@ 5176.600	33.66	8.40	39.27	100.55	103.35	---	---	Peak

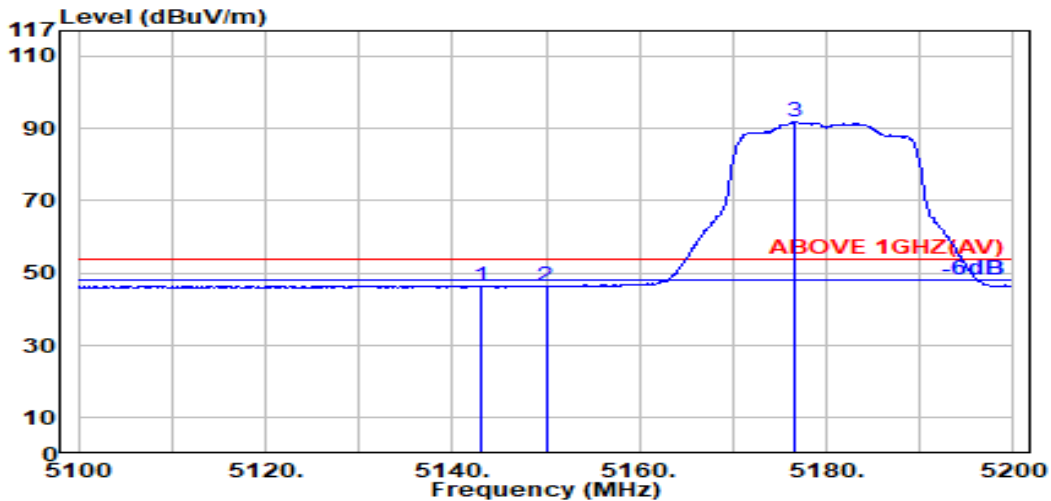


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.000	33.49	8.37	39.27	43.88	46.46	54.00	7.54	Average
5150.000	33.50	8.37	39.27	43.72	46.32	54.00	7.68	Average
@ 5176.600	33.66	8.40	39.27	89.04	91.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

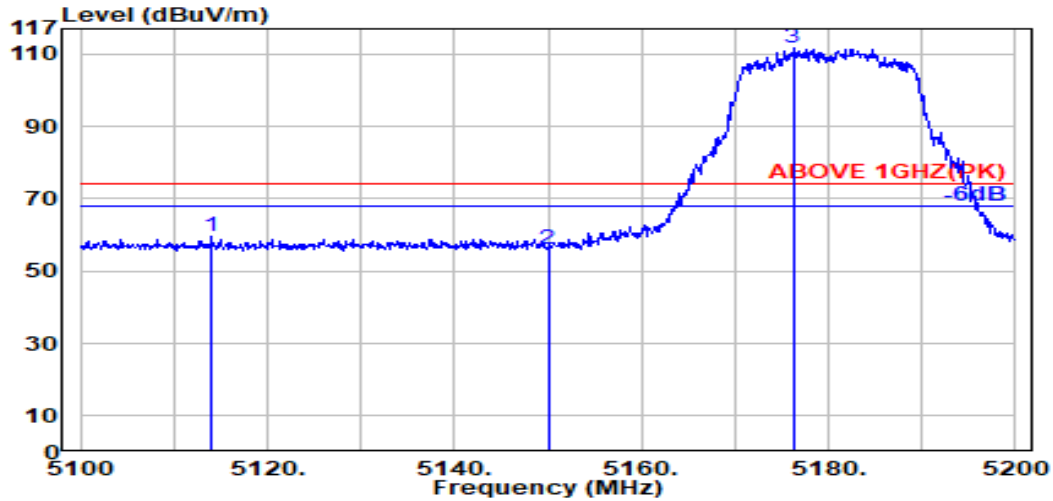

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.100	33.43	8.34	39.27	57.23	59.73	74.00	14.27	Peak
5150.000	33.50	8.37	39.27	53.37	55.97	74.00	18.03	Peak
@ 5176.200	33.66	8.40	39.27	108.85	111.64	---	---	Peak

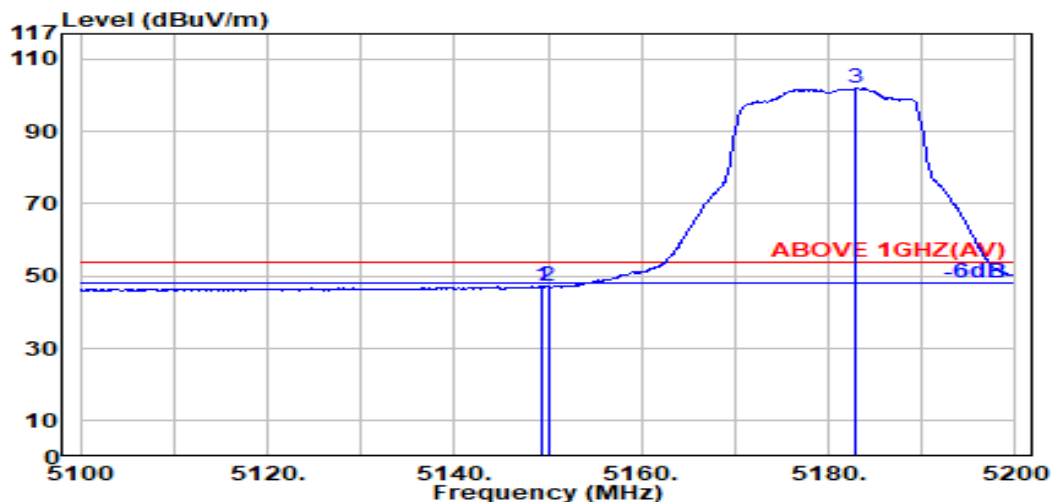

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.27	44.67	47.27	54.00	6.73	Average
5150.000	33.50	8.37	39.27	44.54	47.14	54.00	6.86	Average
@ 5182.900	33.70	8.41	39.27	99.18	102.02	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

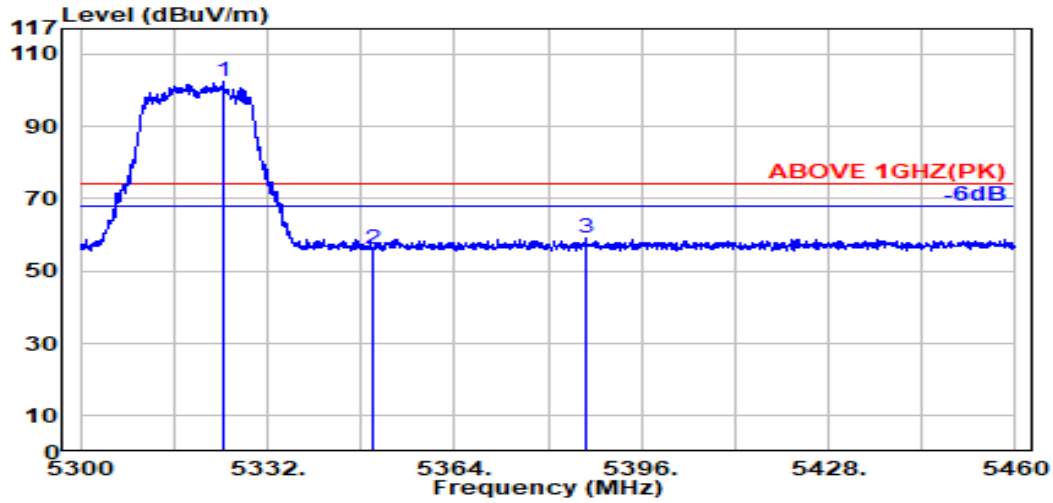

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.400	33.75	8.55	39.26	99.54	102.58	---	---	Peak
5350.000	33.70	8.57	39.26	53.15	56.17	74.00	17.83	Peak
5386.600	33.85	8.61	39.26	55.77	58.97	74.00	15.03	Peak

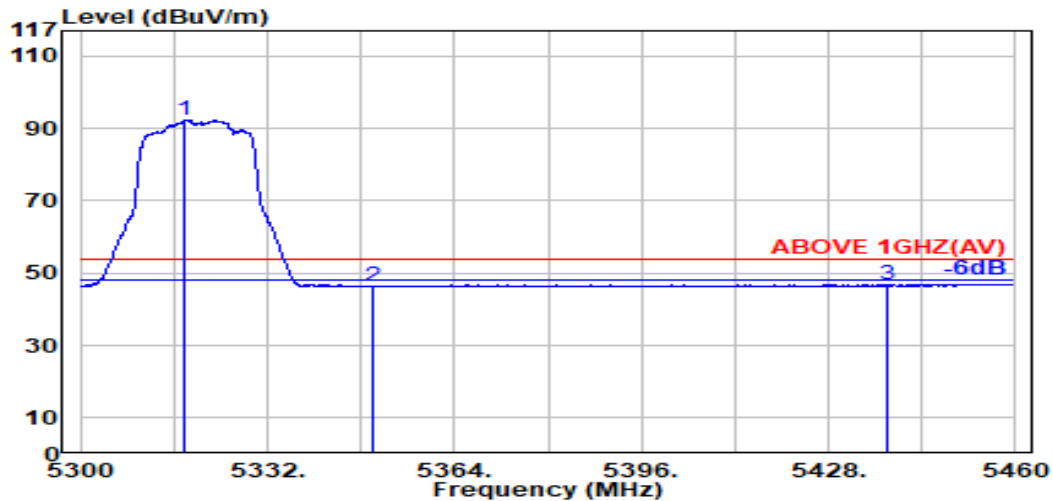


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	33.76	8.54	39.26	89.41	92.46	---	---	Average
5350.000	33.70	8.57	39.26	43.38	46.39	54.00	7.61	Average
5438.100	33.98	8.66	39.25	43.60	46.98	54.00	7.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

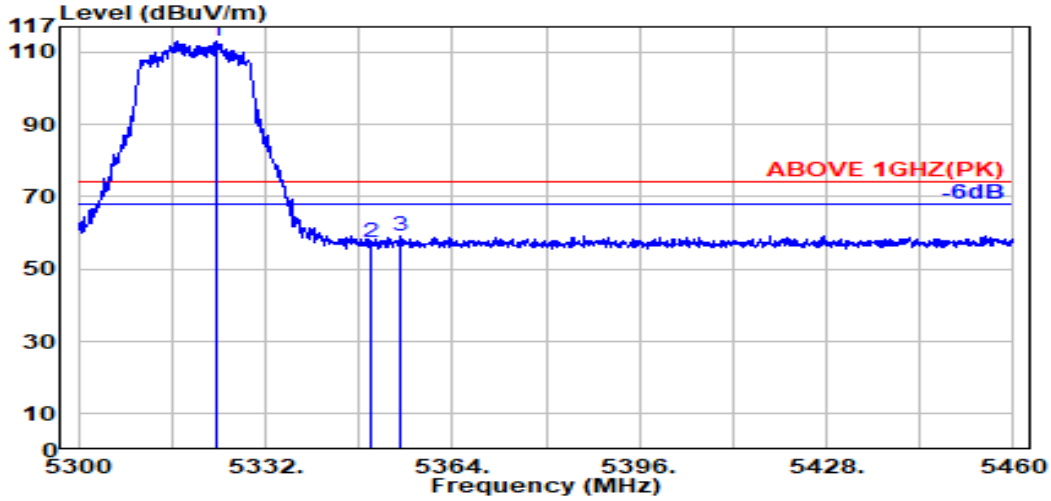

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.75	8.55	39.26	110.20	113.24	---	---	Peak
5350.000	33.70	8.57	39.26	54.54	57.55	74.00	16.45	Peak
5354.900	33.72	8.58	39.26	56.17	59.21	74.00	14.79	Peak

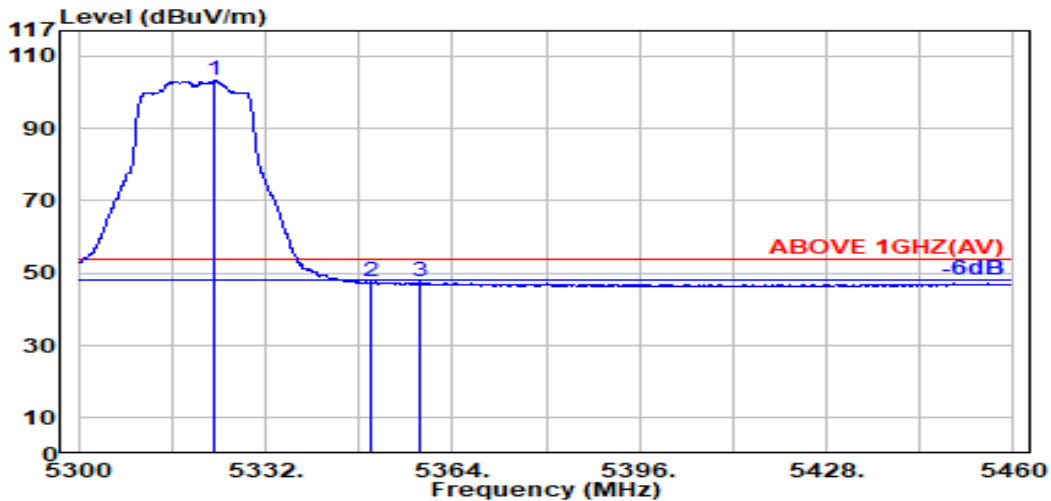


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	33.75	8.55	39.26	100.22	103.26	---	---	Average
5350.000	33.70	8.57	39.26	44.58	47.59	54.00	6.41	Average
5358.500	33.73	8.58	39.26	44.53	47.58	54.00	6.42	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

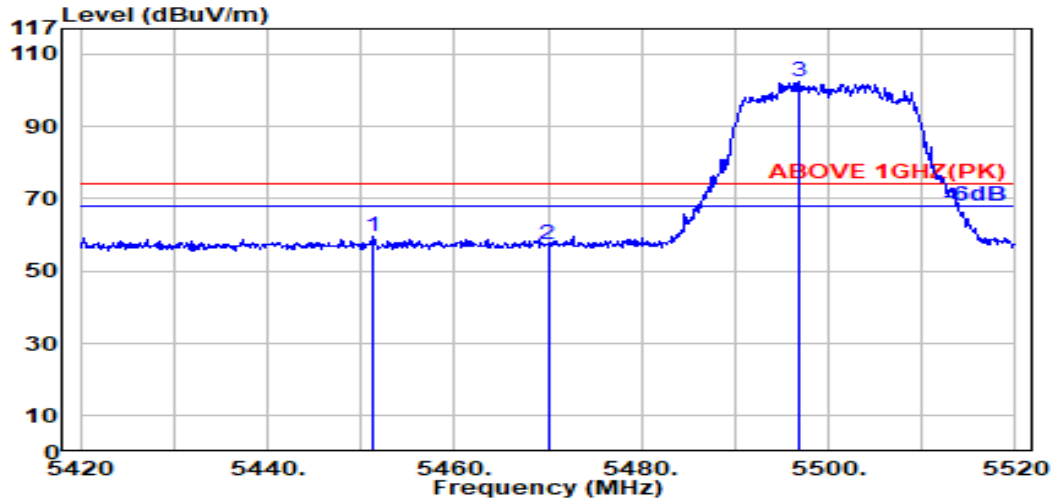

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.300	34.00	8.67	39.25	56.34	59.76	74.00	14.24	Peak
5470.000	34.04	8.69	39.25	53.72	57.20	74.00	16.80	Peak
@ 5496.900	34.09	8.71	39.25	98.76	102.32	---	---	Peak

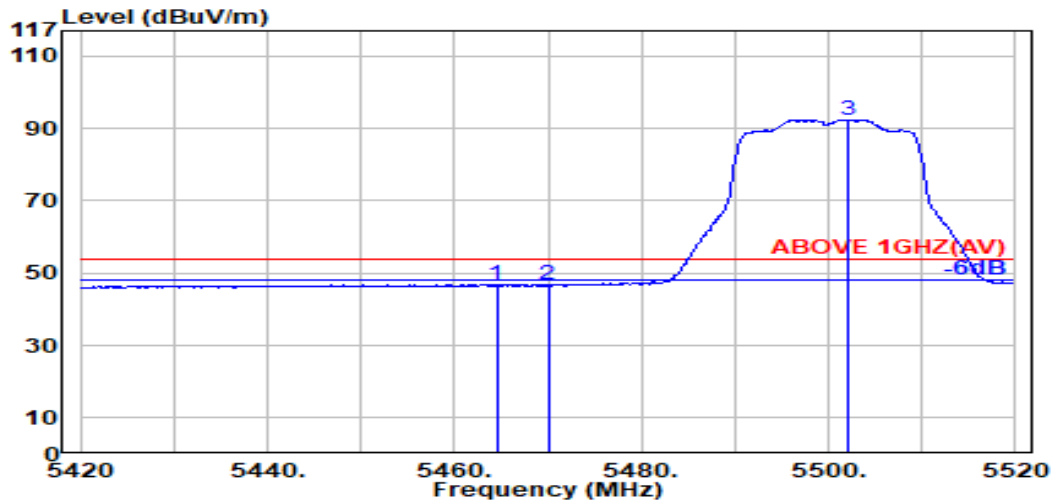


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.03	8.68	39.25	43.33	46.79	54.00	7.21	Average
5470.000	34.04	8.69	39.25	43.15	46.63	54.00	7.37	Average
@ 5502.000	34.10	8.72	39.25	88.93	92.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

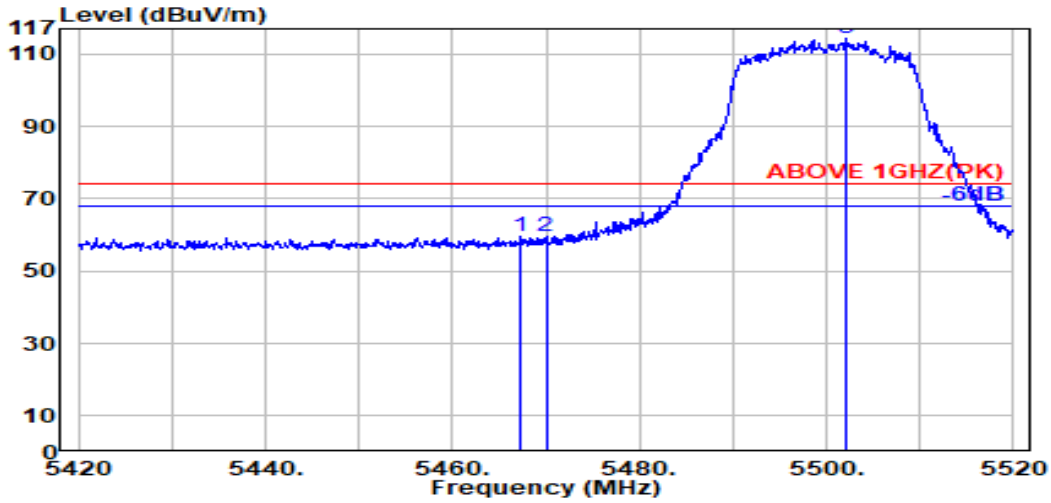

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.25	56.26	59.73	74.00	14.27	Peak
5470.000	34.04	8.69	39.25	56.05	59.52	74.00	14.48	Peak
@ 5502.200	34.10	8.72	39.25	110.60	114.16	---	---	Peak

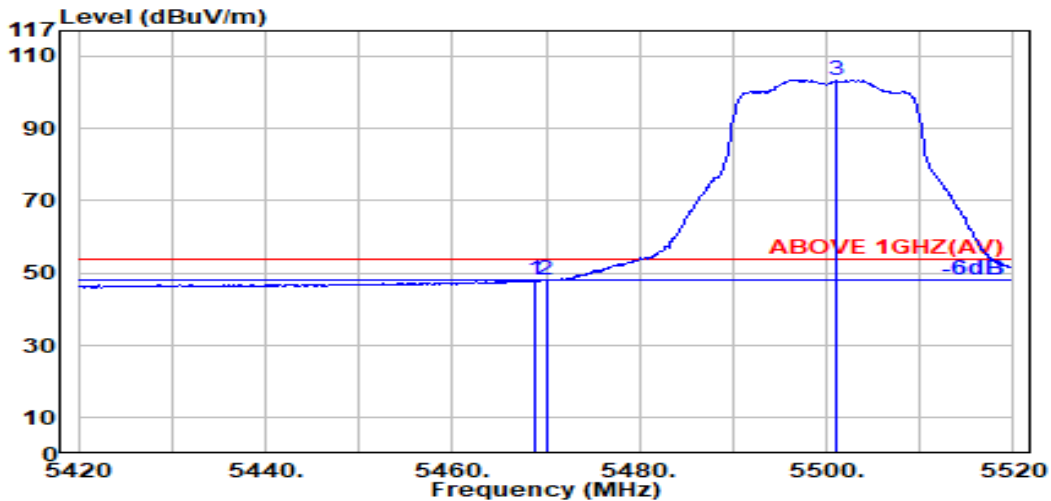


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.25	44.54	48.01	54.00	5.99	Average
5470.000	34.04	8.69	39.25	44.59	48.07	54.00	5.93	Average
@ 5501.100	34.10	8.72	39.25	99.83	103.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

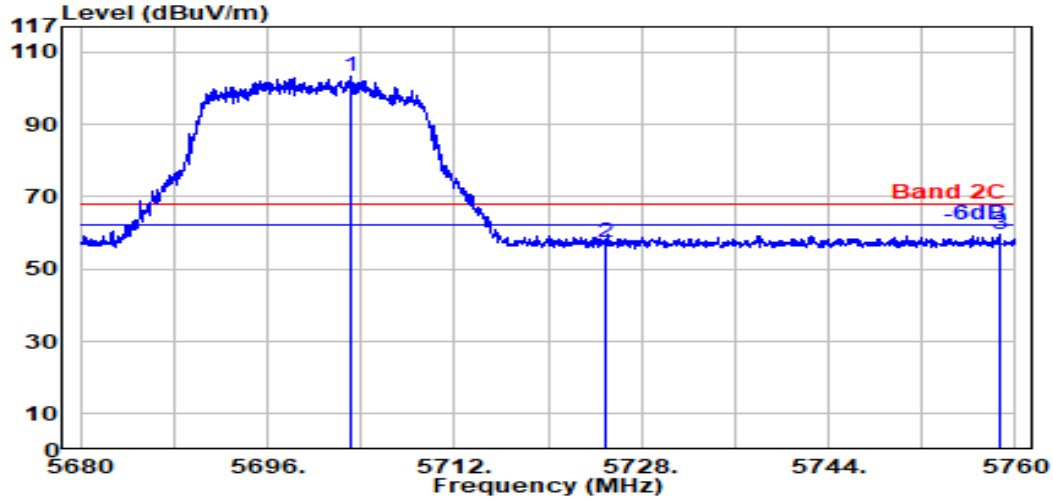

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.050	33.60	8.91	39.29	100.07	103.29	---	---	Peak
5725.000	33.60	8.93	39.29	53.98	57.21	68.20	10.99	Peak
5758.600	33.63	8.96	39.30	56.24	59.53	68.20	8.67	Peak

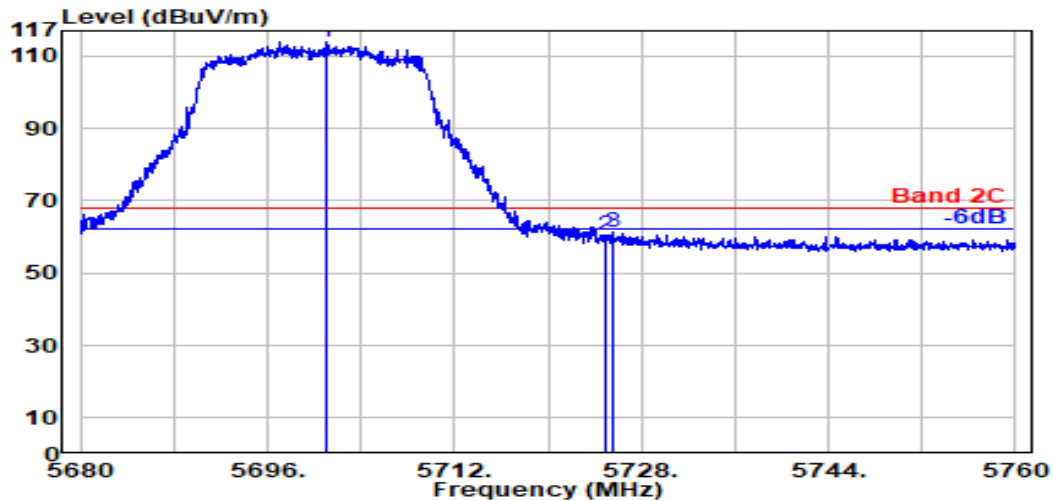


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.000	33.60	8.90	39.29	110.58	113.79	---	---	Peak
5725.000	33.60	8.93	39.29	57.15	60.38	68.20	7.82	Peak
5725.500	33.60	8.93	39.29	58.14	61.37	68.20	6.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

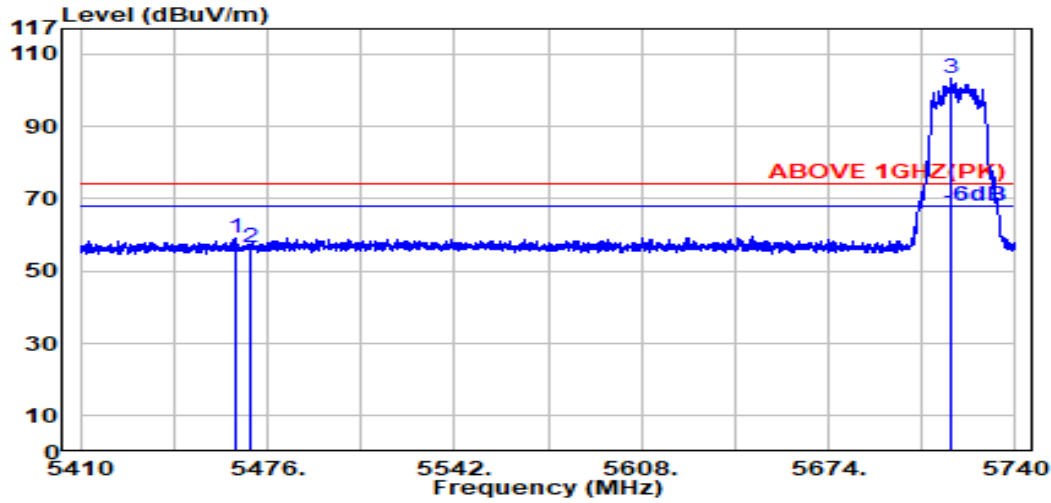

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.03	8.68	39.25	55.67	59.13	74.00	14.87	Peak
5470.000	34.04	8.69	39.25	53.01	56.48	74.00	17.52	Peak
@ 5717.100	33.60	8.92	39.29	100.15	103.38	---	---	Peak

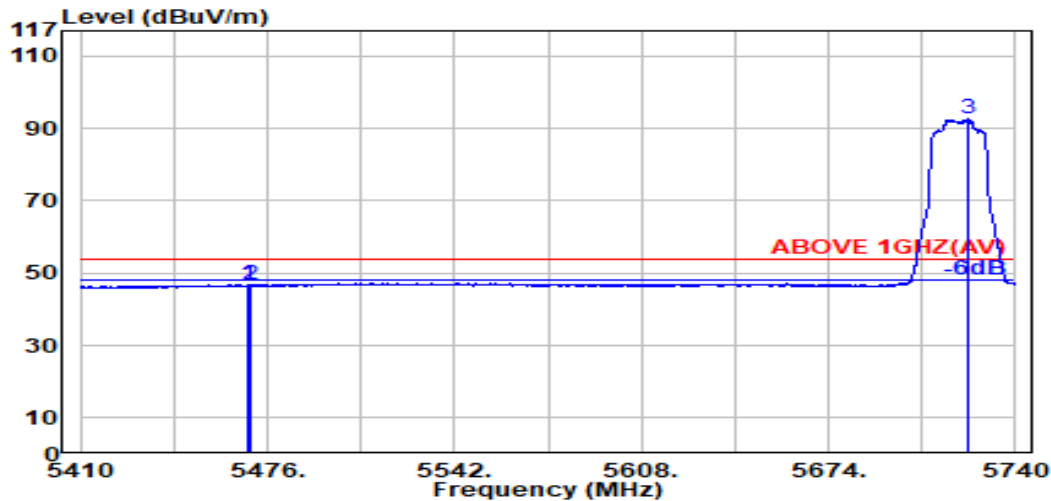


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	43.32	46.79	54.00	7.21	Average
5470.000	34.04	8.69	39.25	43.15	46.63	54.00	7.37	Average
@ 5723.000	33.60	8.92	39.29	89.29	92.52	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

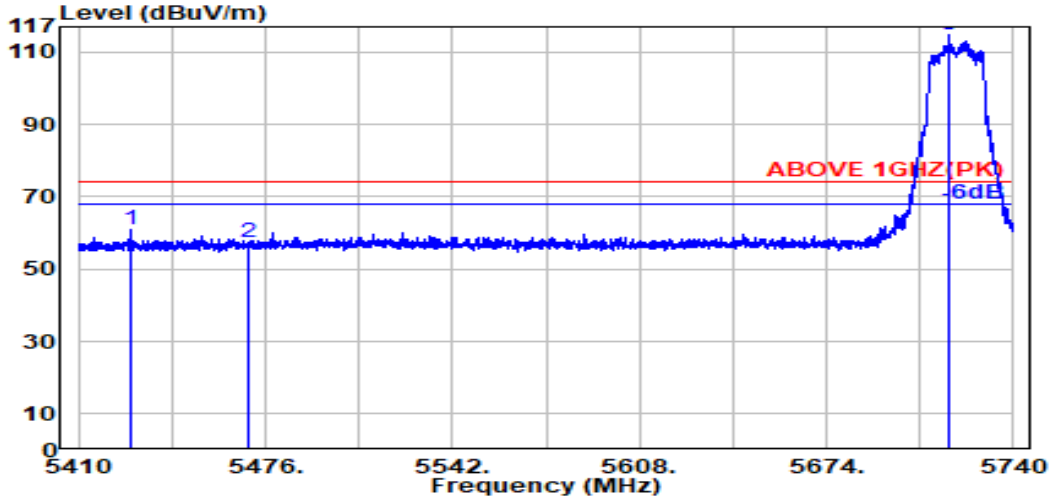

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.100	33.96	8.65	39.25	57.45	60.80	74.00	13.20	Peak
5470.000	34.04	8.69	39.25	54.09	57.57	74.00	16.43	Peak
@ 5717.600	33.60	8.92	39.29	111.59	114.82	---	---	Peak

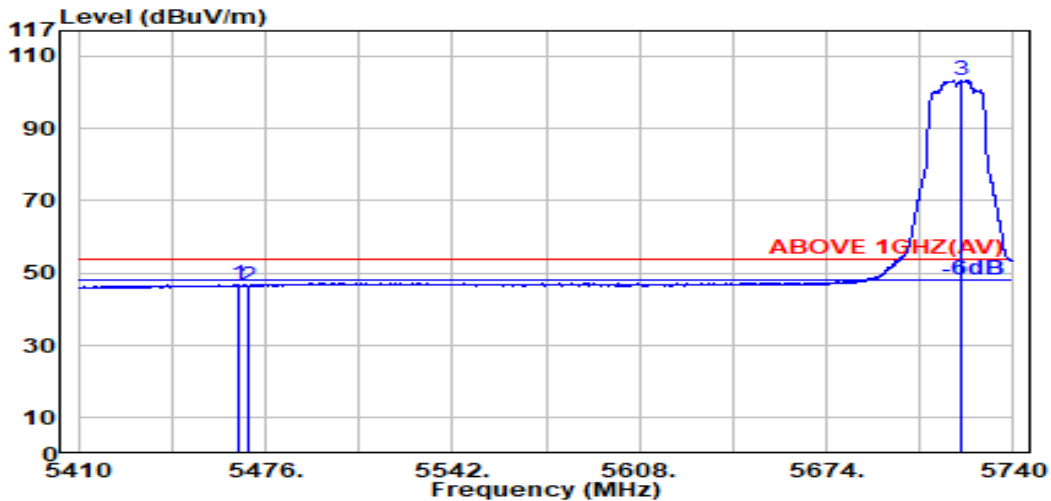


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.03	8.69	39.25	43.25	46.71	54.00	7.29	Average
5470.000	34.04	8.69	39.25	43.01	46.49	54.00	7.51	Average
@ 5721.200	33.60	8.92	39.29	100.04	103.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

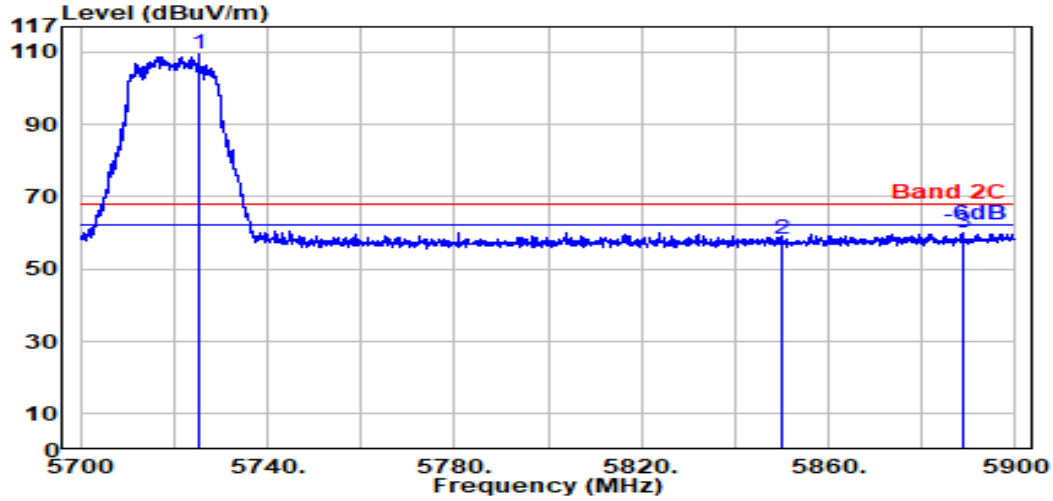

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5725.300	33.60	8.93	39.29	106.31	109.54	---	---	Peak
5850.000	33.90	9.04	39.31	54.86	58.49	68.20	9.71	Peak
5888.600	34.05	9.07	39.32	56.13	59.94	68.20	8.26	Peak

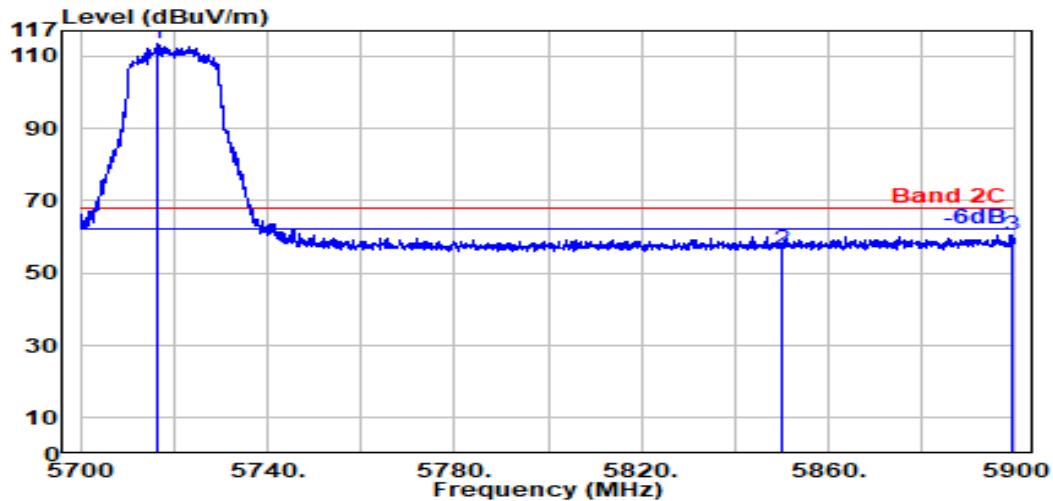


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.200	33.60	8.92	39.29	110.39	113.62	---	---	Peak
5850.000	33.90	9.04	39.31	52.89	56.52	68.20	11.68	Peak
5899.100	34.10	9.08	39.32	56.85	60.71	68.20	7.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

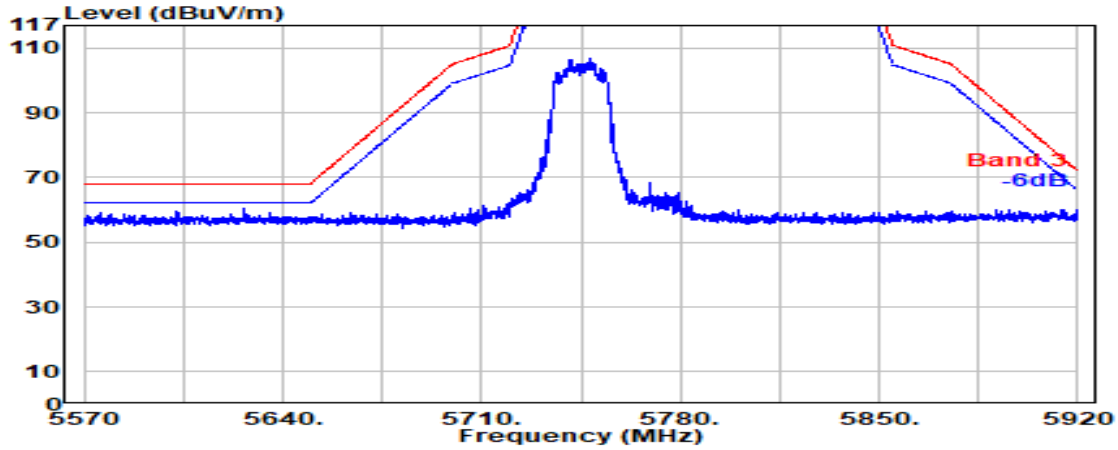


Antenna at Vertical Polarization

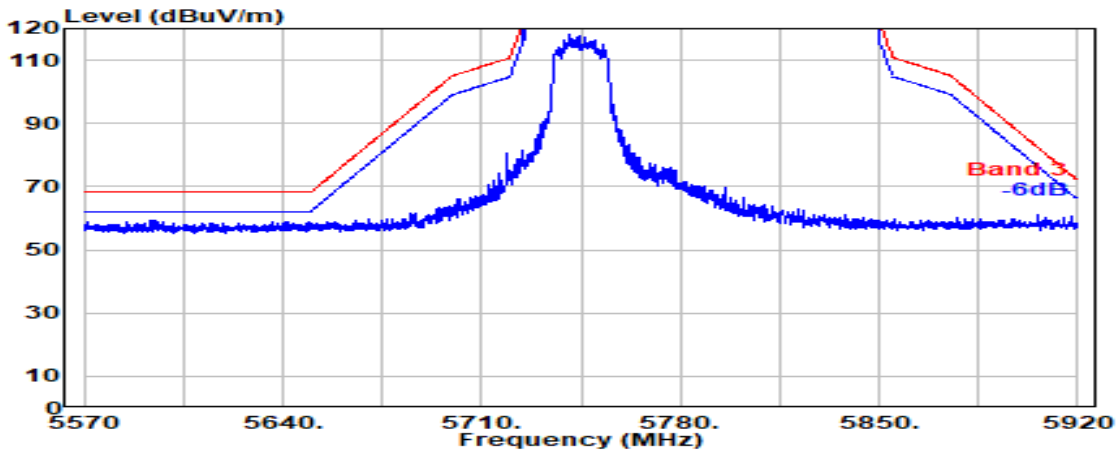


Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

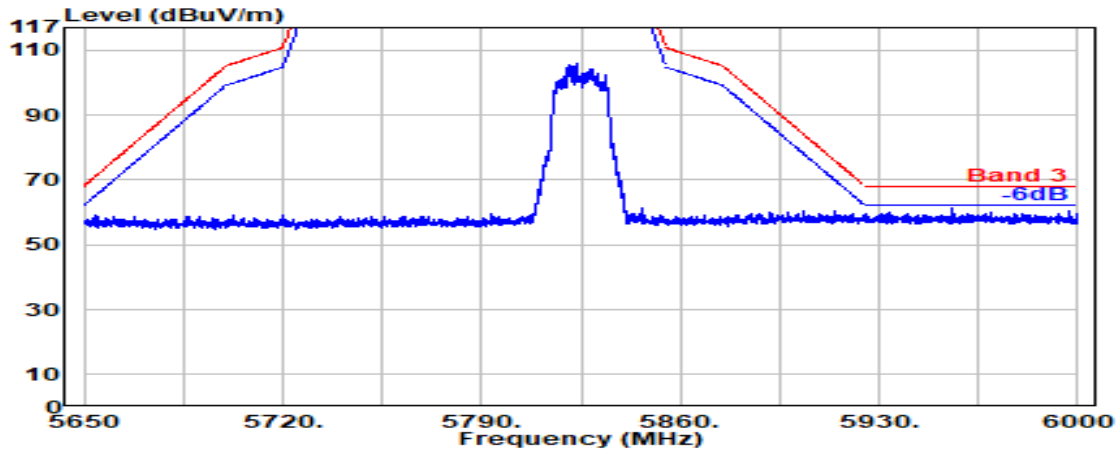

Antenna at Vertical Polarization

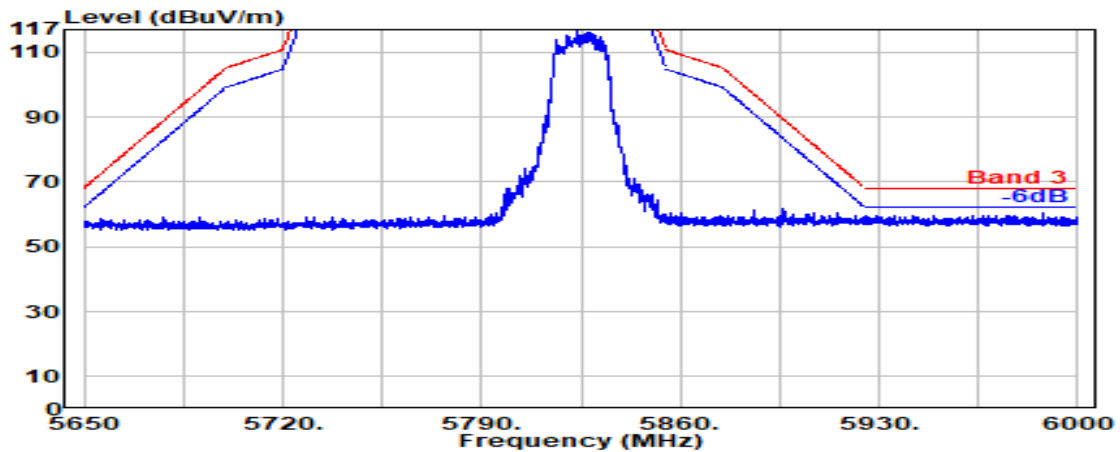


Mode	802.11ax-HE20	U-NII Band	4
		Frequency	TX 5885MHz

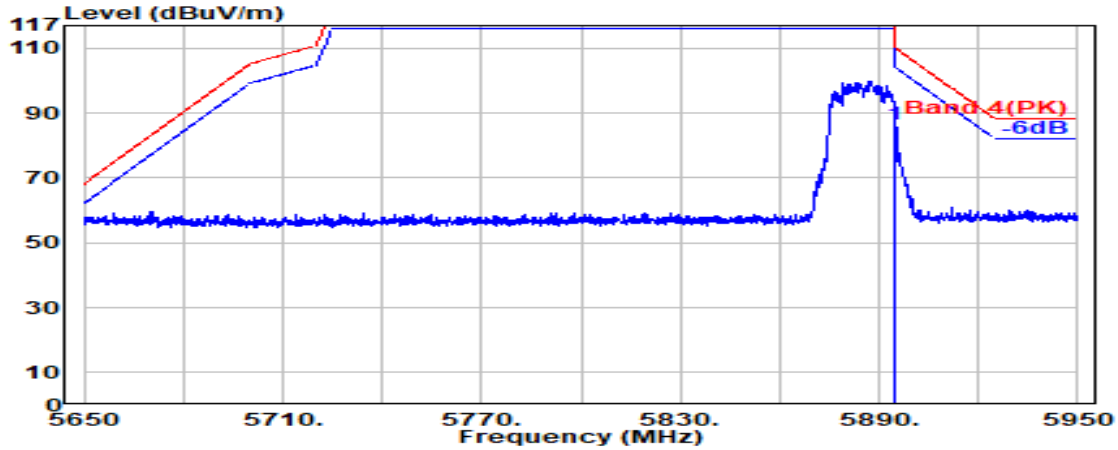

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	82.53	86.37	110.20	23.83	Peak

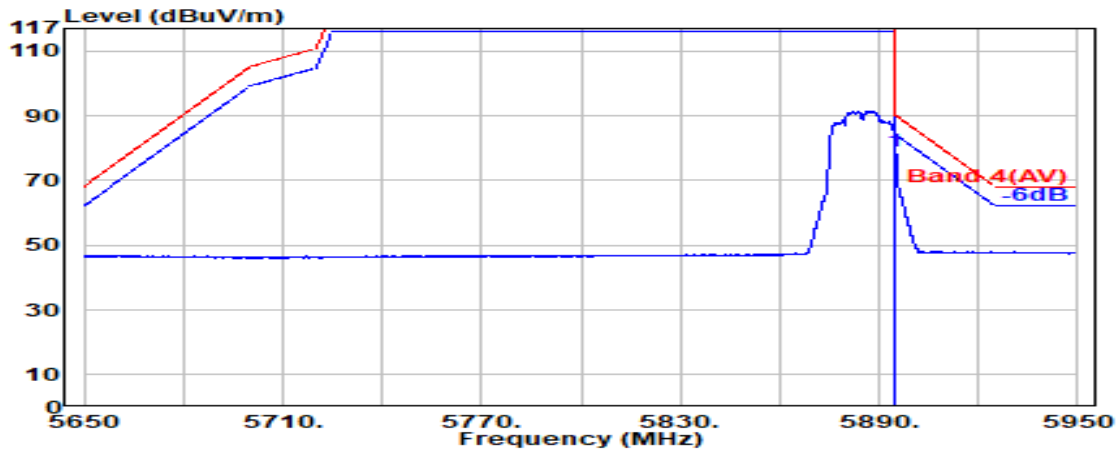


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	75.15	78.99	90.20	11.21	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE20	U-NII Band	4
		Frequency	TX 5885MHz

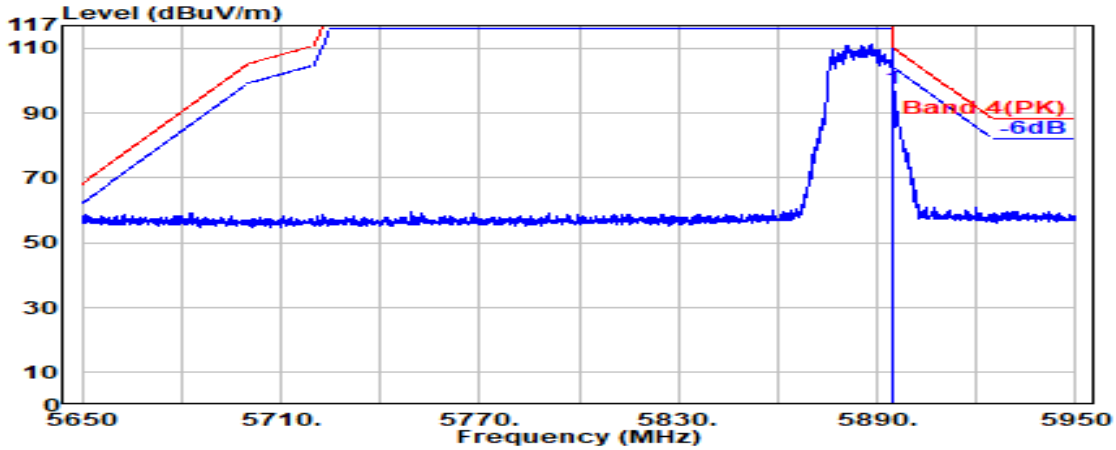

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	93.78	97.62	110.20	12.58	Peak

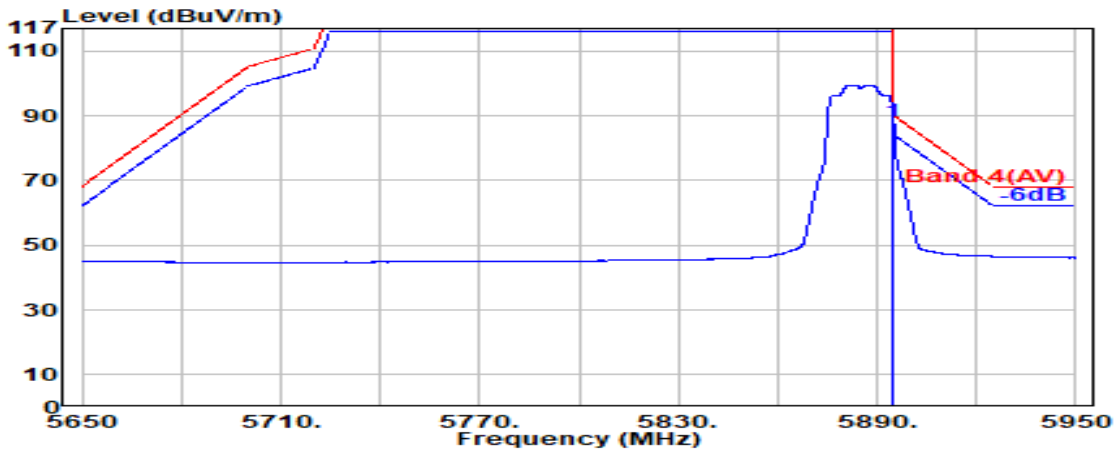


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	84.68	88.52	90.20	1.68	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

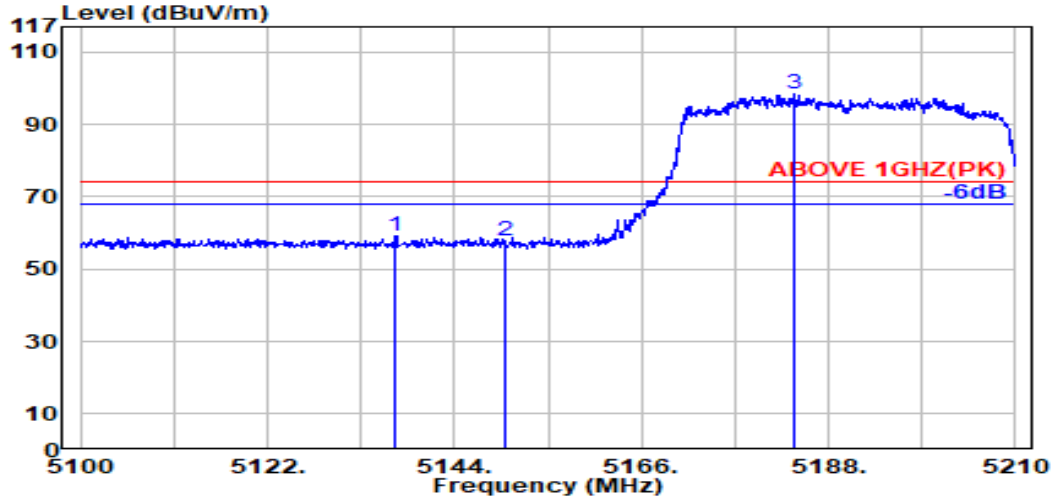

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.100	33.47	8.36	39.27	56.45	59.01	74.00	14.99	Peak
5150.000	33.50	8.37	39.27	55.32	57.92	74.00	16.08	Peak
@ 5184.100	33.70	8.41	39.27	95.52	98.36	---	---	Peak

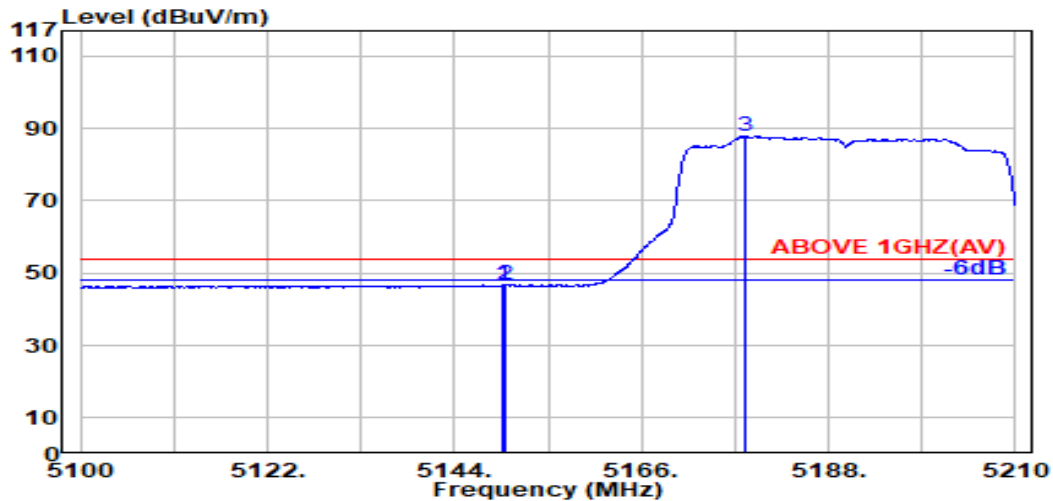


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	44.00	46.60	54.00	7.40	Average
5150.000	33.50	8.37	39.27	43.99	46.59	54.00	7.41	Average
@ 5178.200	33.67	8.40	39.27	85.00	87.80	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

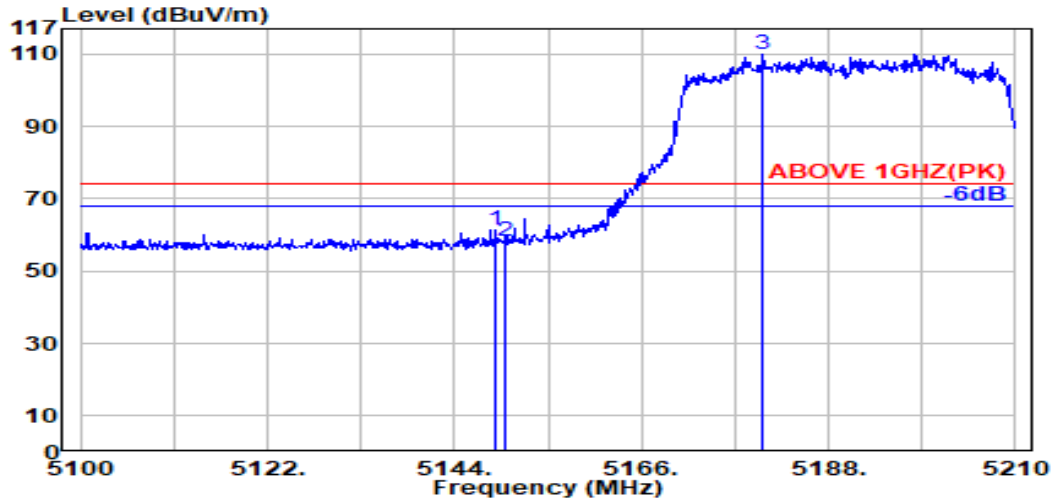

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.27	58.65	61.25	74.00	12.75	Peak
5150.000	33.50	8.37	39.27	55.59	58.20	74.00	15.80	Peak
@ 5180.200	33.68	8.40	39.27	107.14	109.96	---	---	Peak

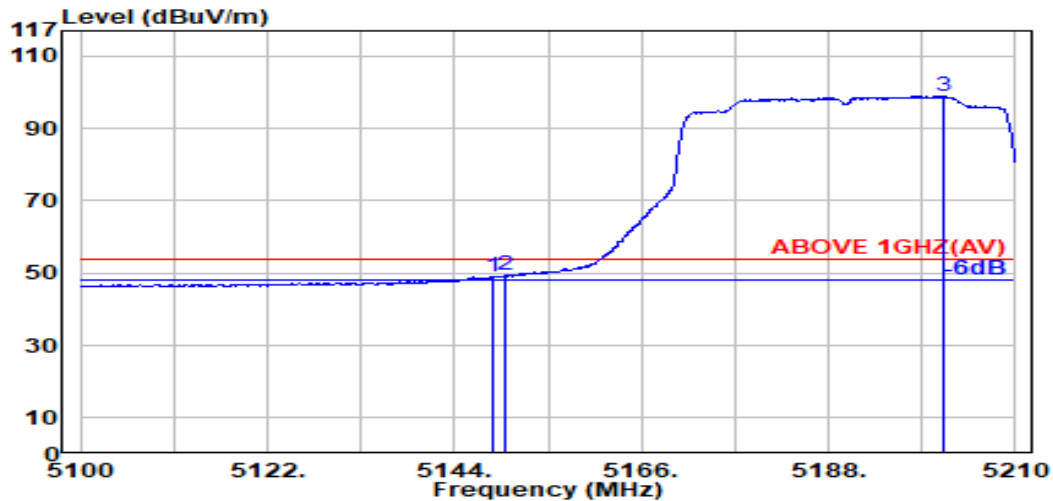


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.50	8.37	39.27	46.37	48.97	54.00	5.03	Average
5150.000	33.50	8.37	39.27	46.73	49.33	54.00	4.67	Average
@ 5201.500	33.80	8.43	39.27	95.90	98.86	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

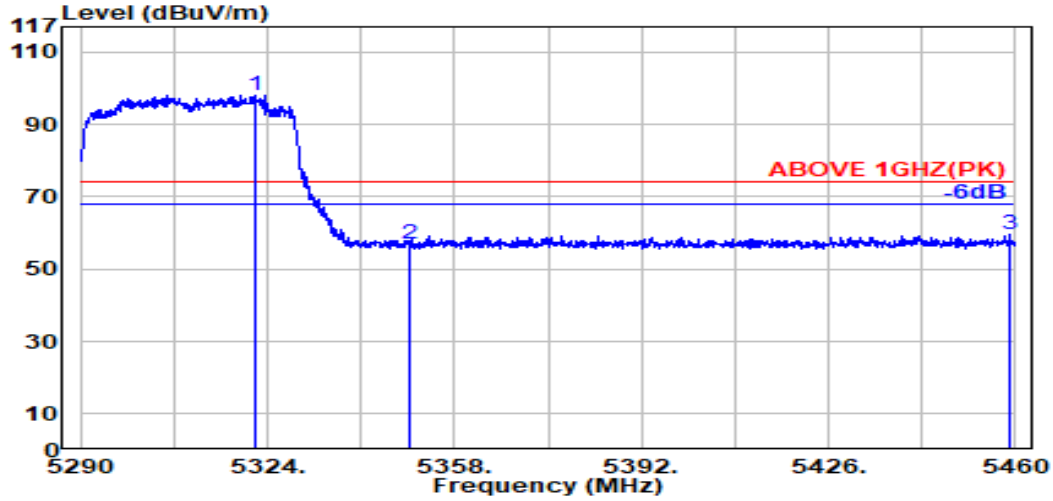

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.76	8.55	39.26	95.00	98.04	---	---	Peak
5350.000	33.70	8.57	39.26	54.09	57.11	74.00	16.89	Peak
5458.900	34.02	8.68	39.25	56.00	59.44	74.00	14.56	Peak

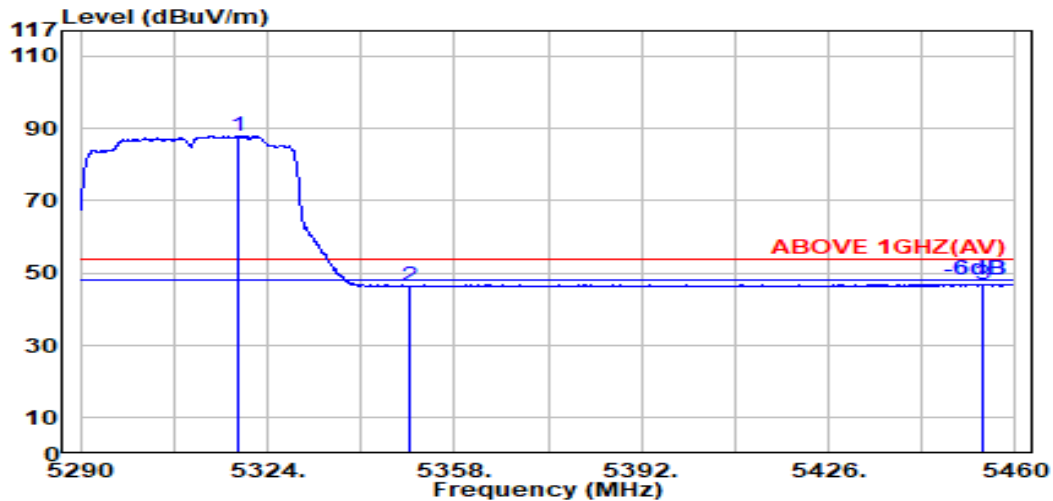


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	33.76	8.54	39.26	84.91	87.96	---	---	Average
5350.000	33.70	8.57	39.26	43.34	46.35	54.00	7.65	Average
5454.100	34.01	8.67	39.25	43.53	46.96	54.00	7.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

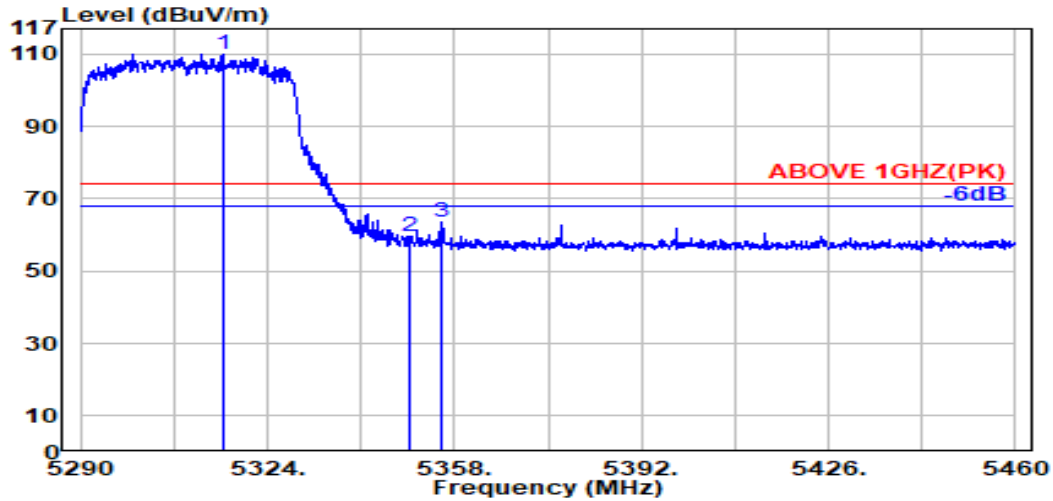

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	33.77	8.54	39.26	107.07	110.12	---	---	Peak
5350.000	33.70	8.57	39.26	56.73	59.74	74.00	14.26	Peak
5355.800	33.72	8.58	39.26	60.57	63.62	74.00	10.38	Peak

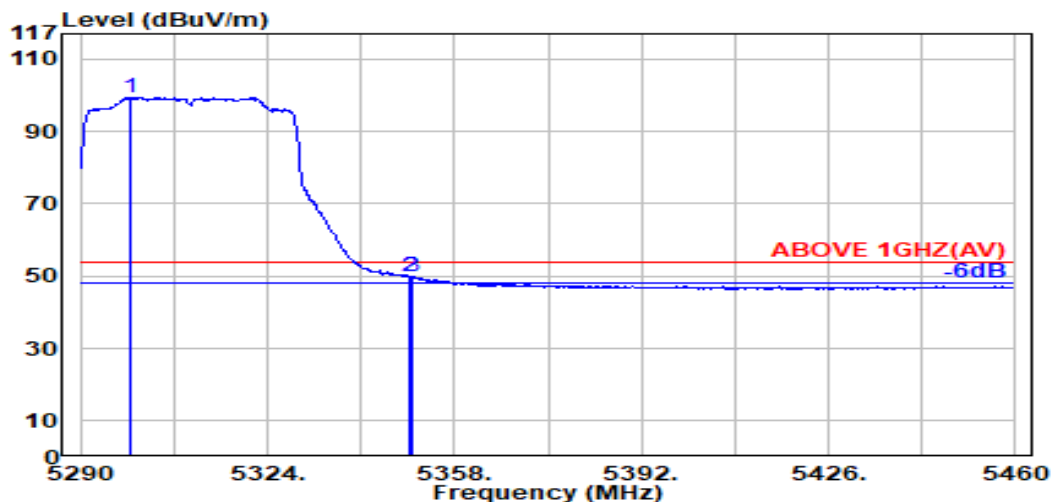


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.900	33.80	8.52	39.26	96.39	99.45	---	---	Average
5350.000	33.70	8.57	39.26	46.76	49.78	54.00	4.22	Average
5350.500	33.70	8.57	39.26	46.71	49.72	54.00	4.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

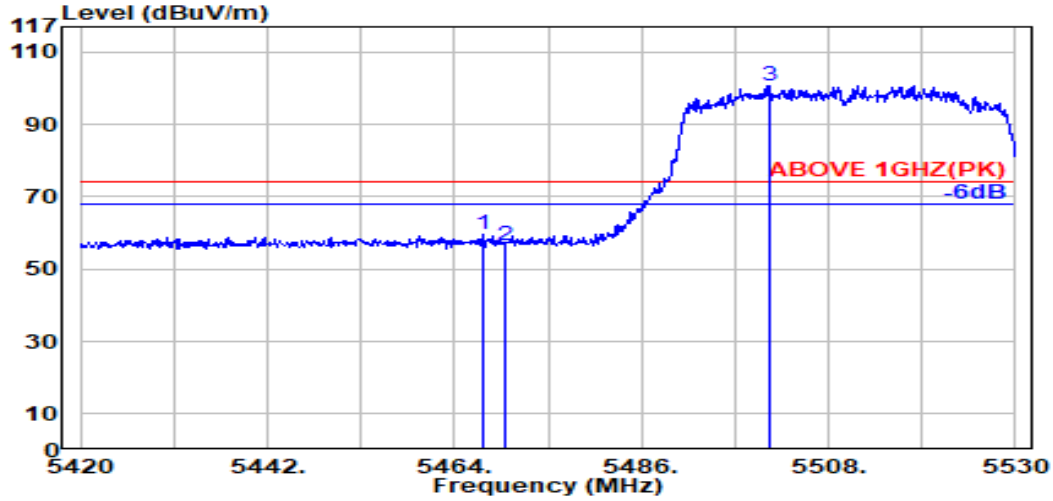

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.25	56.15	59.62	74.00	14.38	Peak
5470.000	34.04	8.69	39.25	53.12	56.59	74.00	17.41	Peak
@ 5501.000	34.10	8.72	39.25	97.24	100.81	---	---	Peak

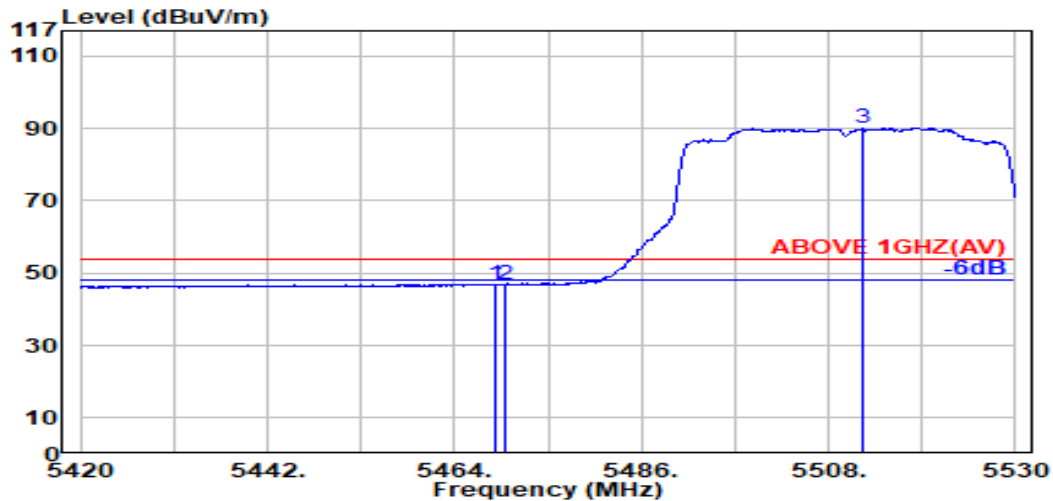


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	43.25	46.72	54.00	7.28	Average
5470.000	34.04	8.69	39.25	43.50	46.98	54.00	7.02	Average
@ 5512.000	34.08	8.73	39.25	86.62	90.17	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

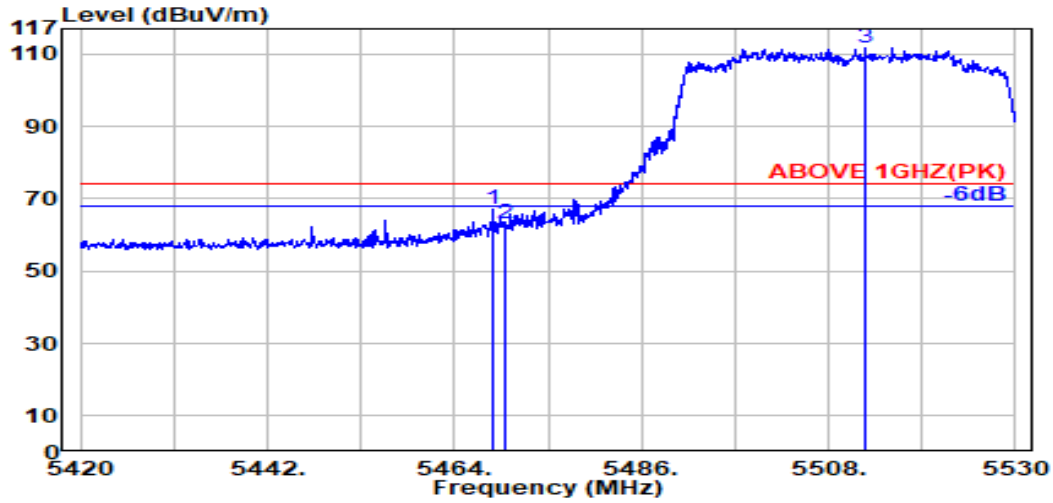

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.25	63.63	67.10	74.00	6.90	Peak
5470.000	34.04	8.69	39.25	59.69	63.17	74.00	10.83	Peak
@ 5512.300	34.08	8.73	39.25	108.07	111.62	---	---	Peak

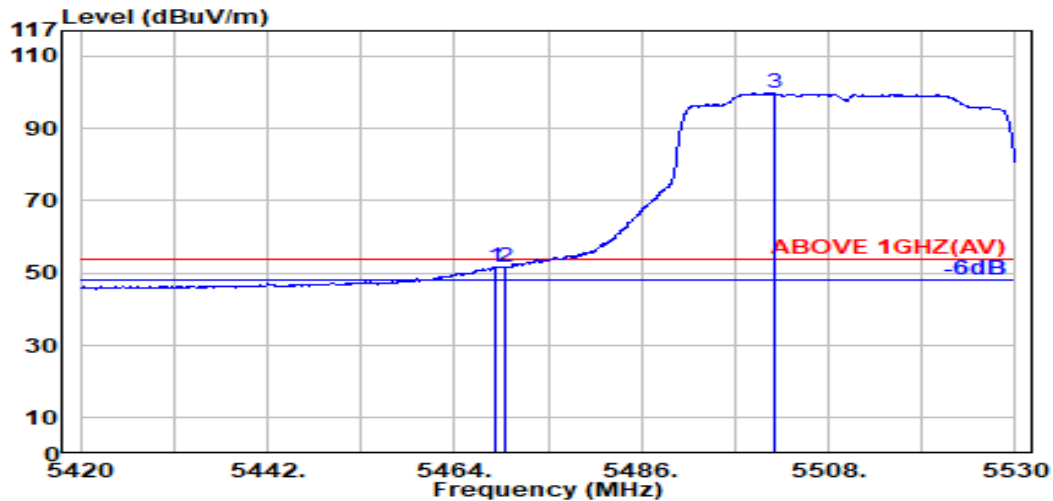


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	48.21	51.69	54.00	2.31	Average
5470.000	34.04	8.69	39.25	48.18	51.66	54.00	2.34	Average
@ 5501.700	34.10	8.72	39.25	96.16	99.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

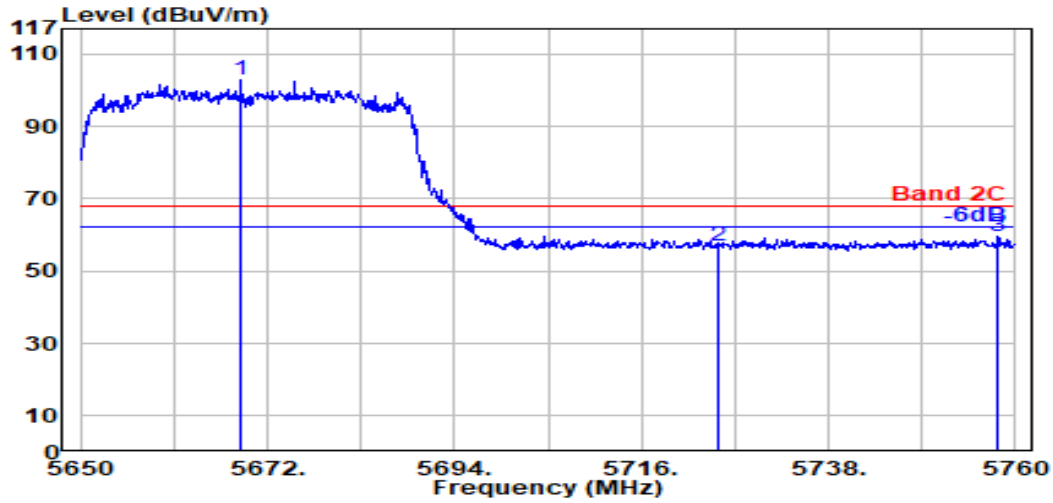

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.800	33.72	8.87	39.28	99.37	102.69	---	---	Peak
5725.000	33.60	8.93	39.29	53.92	57.15	68.20	11.05	Peak
5757.900	33.63	8.96	39.30	56.27	59.56	68.20	8.64	Peak

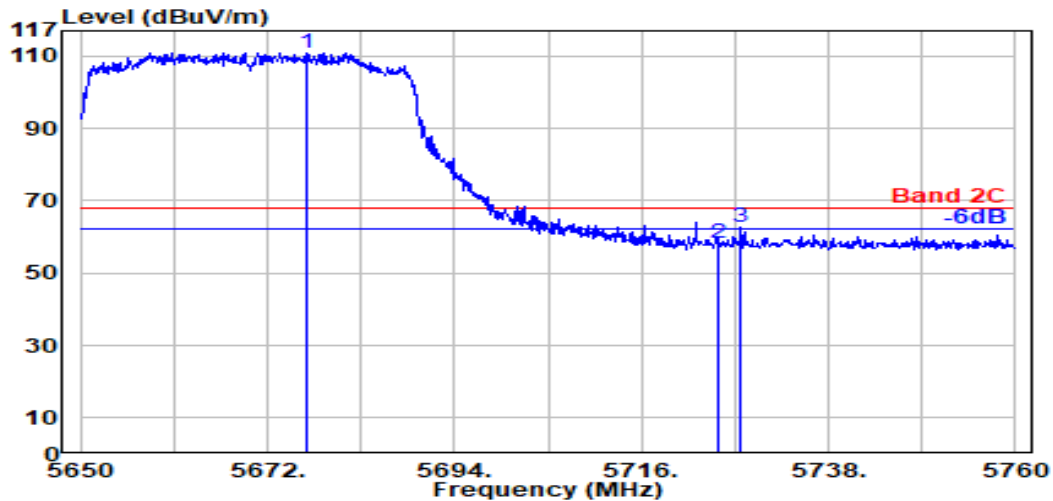


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.500	33.69	8.88	39.28	107.50	110.79	---	---	Peak
5725.000	33.60	8.93	39.29	54.89	58.12	68.20	10.08	Peak
5727.700	33.60	8.93	39.29	59.63	62.86	68.20	5.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

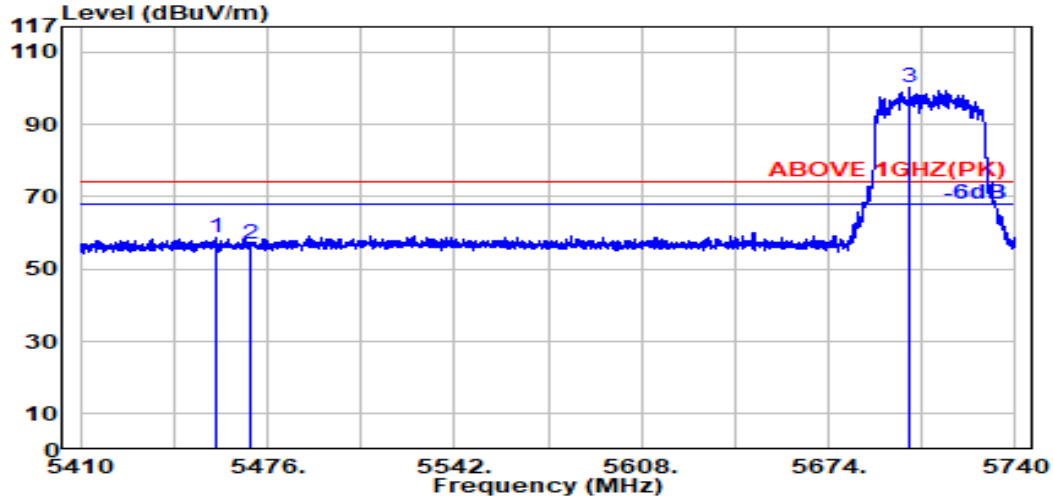

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.02	8.68	39.25	55.07	58.51	74.00	15.49	Peak
5470.000	34.04	8.69	39.25	53.49	56.97	74.00	17.03	Peak
@ 5702.300	33.60	8.90	39.29	96.92	100.14	---	---	Peak

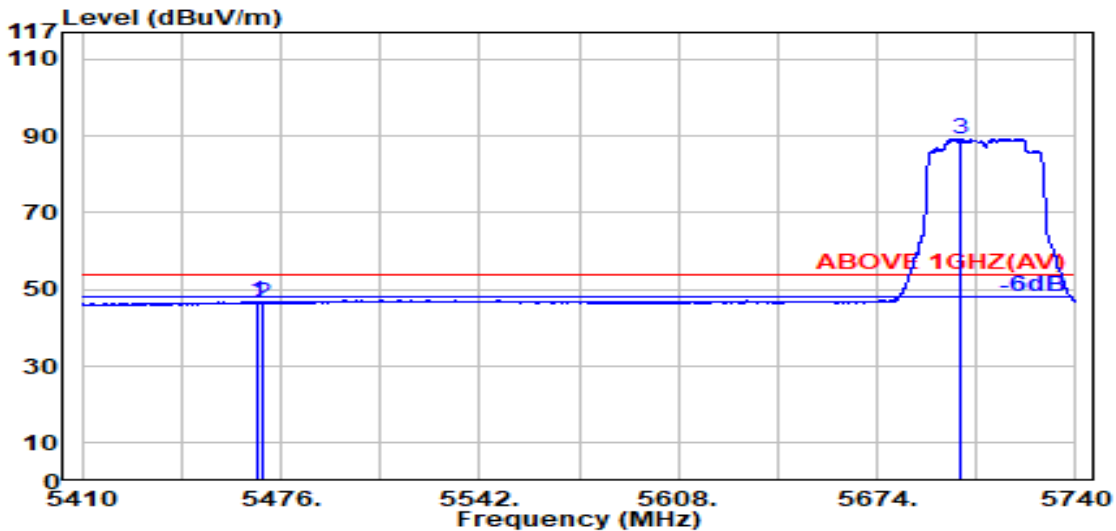


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.25	43.45	46.92	54.00	7.08	Average
5470.000	34.04	8.69	39.25	42.95	46.43	54.00	7.57	Average
@ 5701.900	33.60	8.90	39.29	86.14	89.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

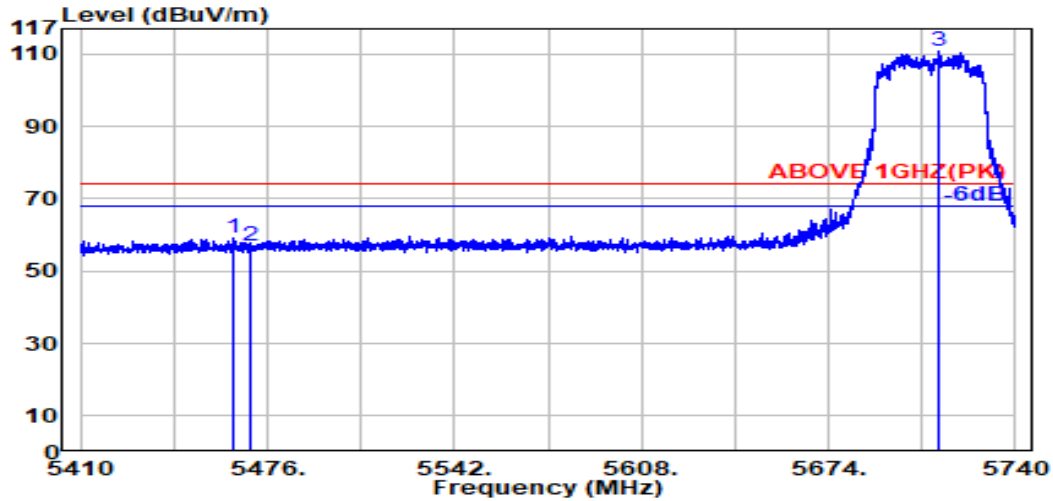

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.03	8.68	39.25	55.50	58.96	74.00	15.04	Peak
5470.000	34.04	8.69	39.25	53.69	57.17	74.00	16.83	Peak
@ 5713.300	33.60	8.91	39.29	107.56	110.78	---	---	Peak

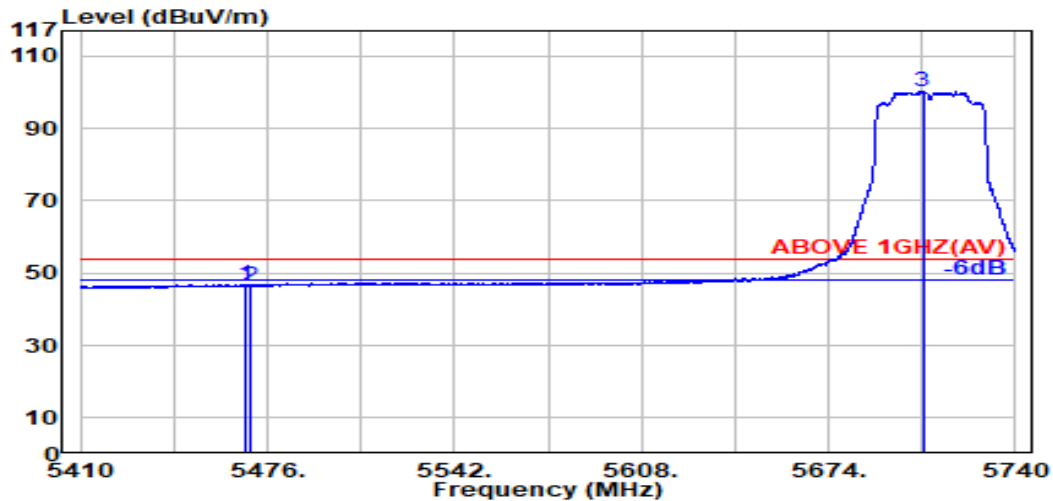


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.25	43.46	46.93	54.00	7.07	Average
5470.000	34.04	8.69	39.25	43.08	46.56	54.00	7.44	Average
@ 5707.300	33.60	8.91	39.29	96.93	100.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

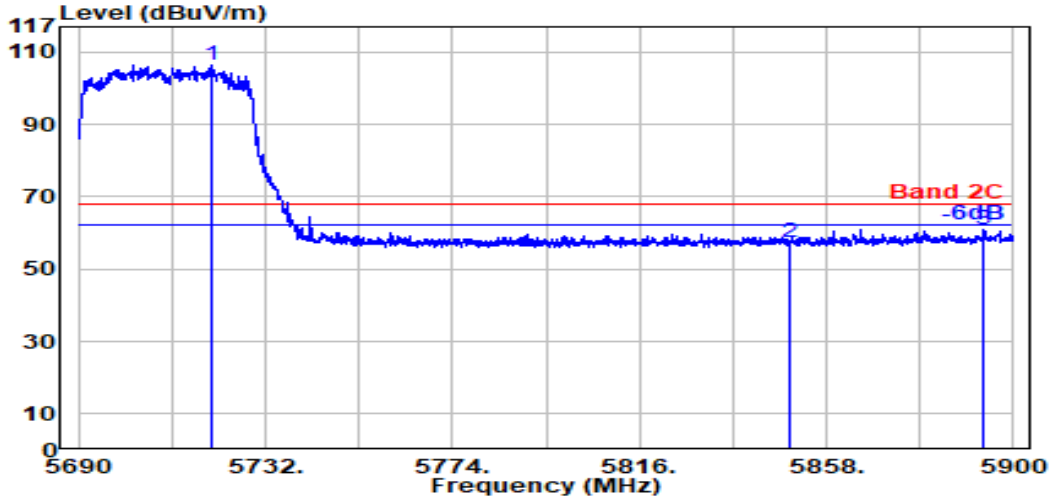

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.000	33.60	8.92	39.29	103.39	106.62	---	---	Peak
5850.000	33.90	9.04	39.31	53.61	57.23	68.20	10.97	Peak
5893.300	34.07	9.08	39.32	57.14	60.97	68.20	7.23	Peak

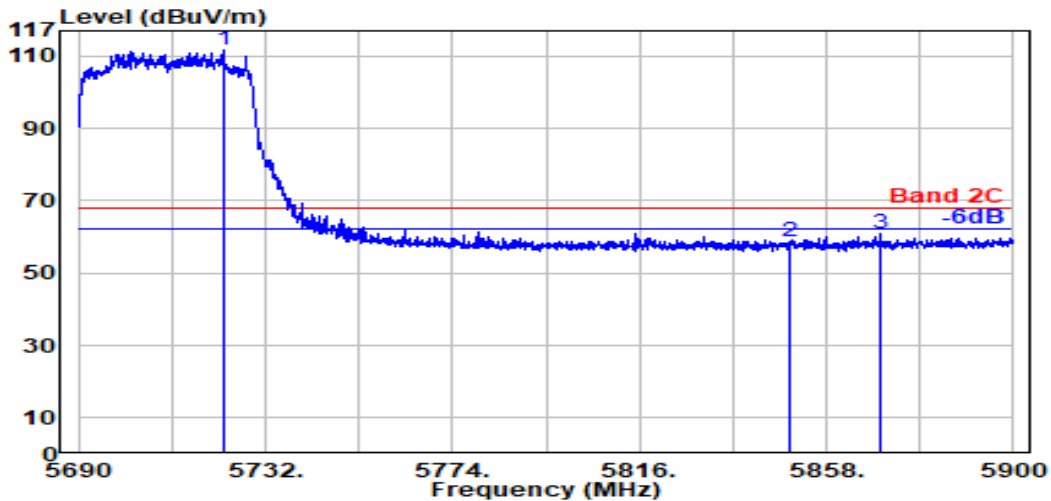

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	33.60	8.92	39.29	108.26	111.49	---	---	Peak
5850.000	33.90	9.04	39.31	54.97	58.59	68.20	9.61	Peak
5870.000	33.98	9.06	39.32	57.07	60.79	68.20	7.41	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

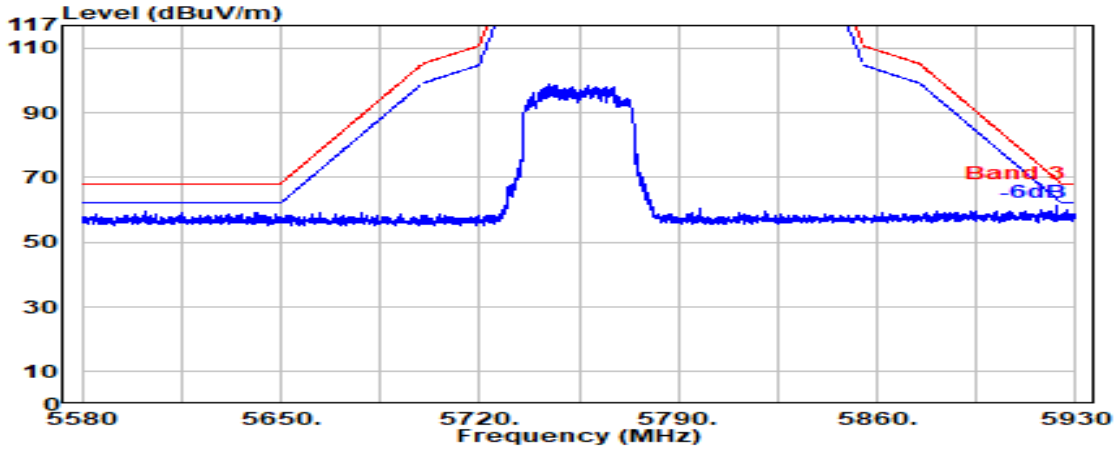


Antenna at Vertical Polarization

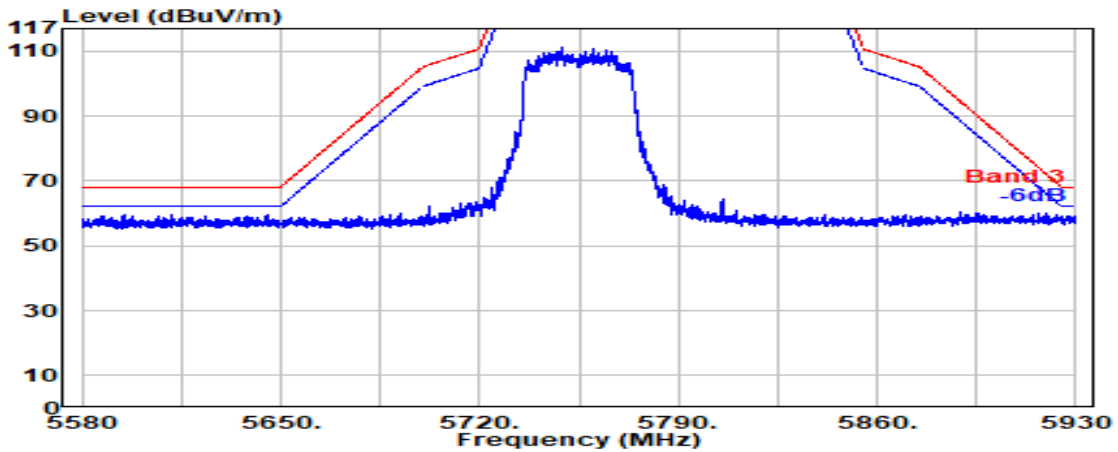


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

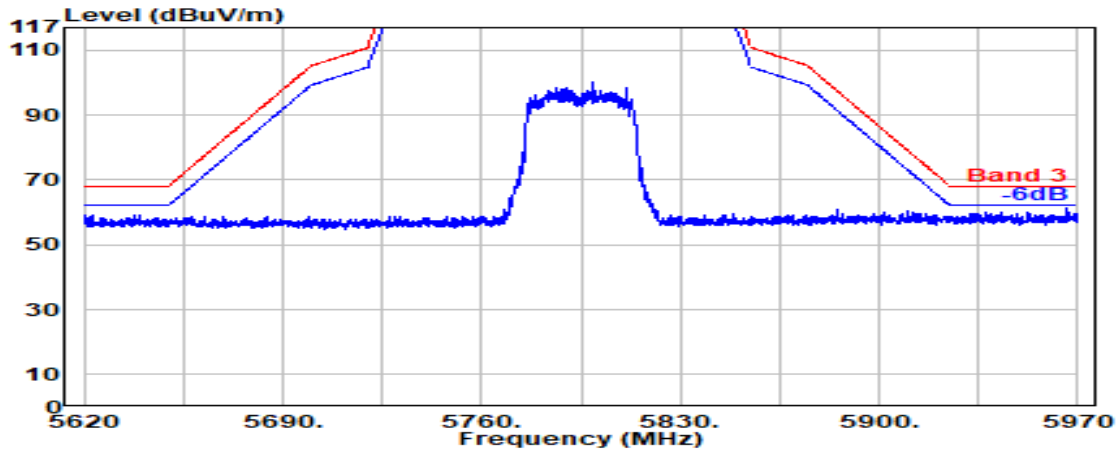

Antenna at Vertical Polarization

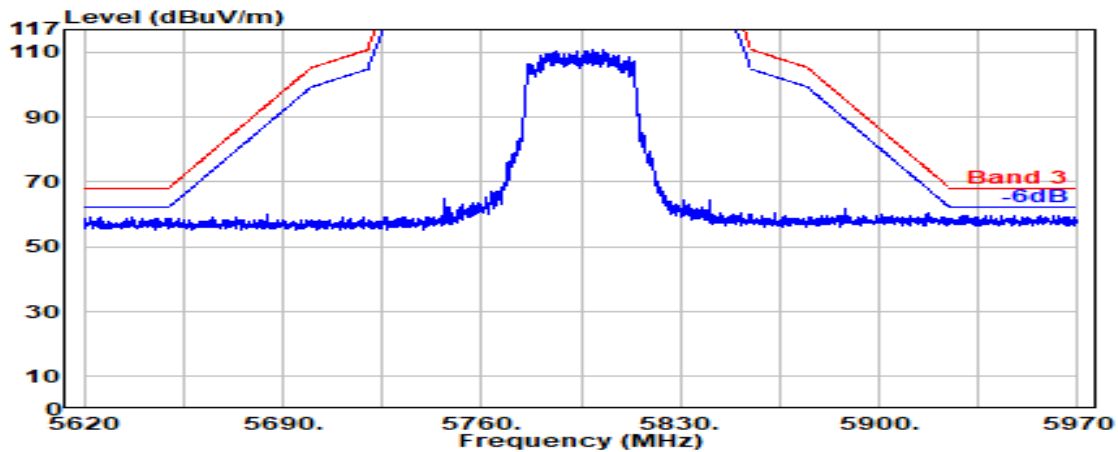


Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5875MHz

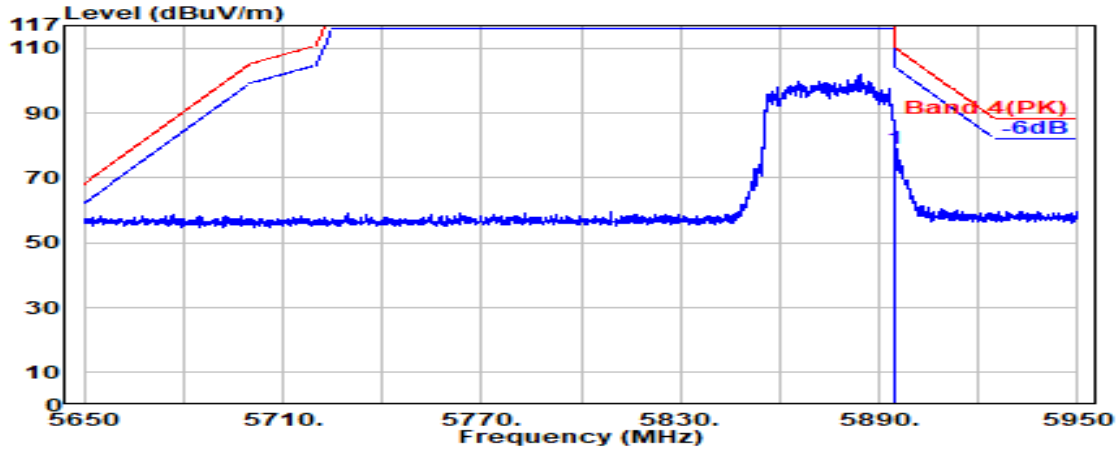

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	75.38	79.21	110.20	30.99	Peak

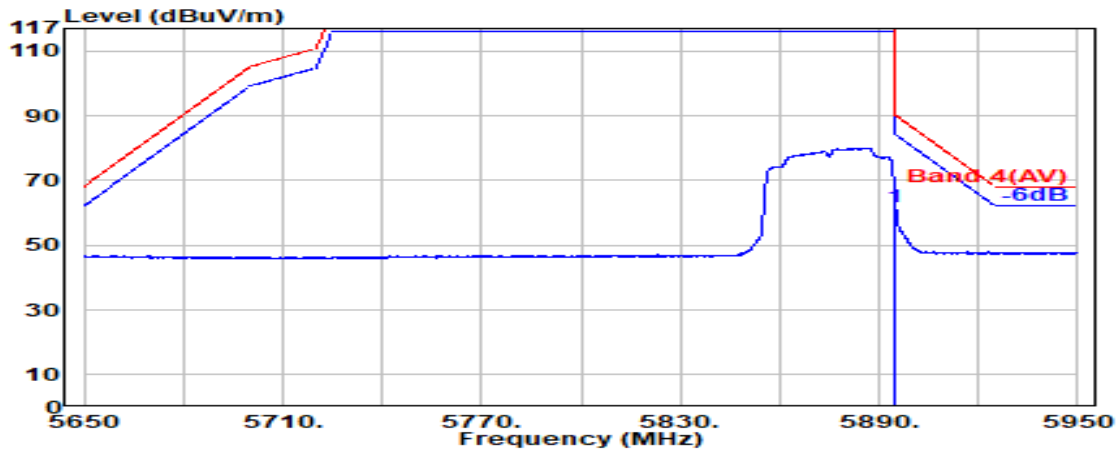


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	58.16	62.00	90.20	28.20	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5875MHz

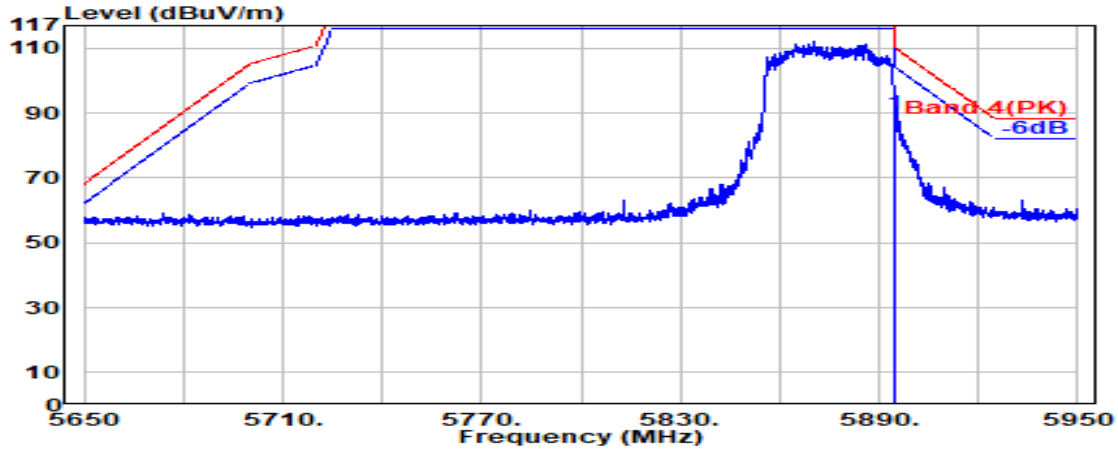

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	86.23	90.07	110.20	20.13	Peak

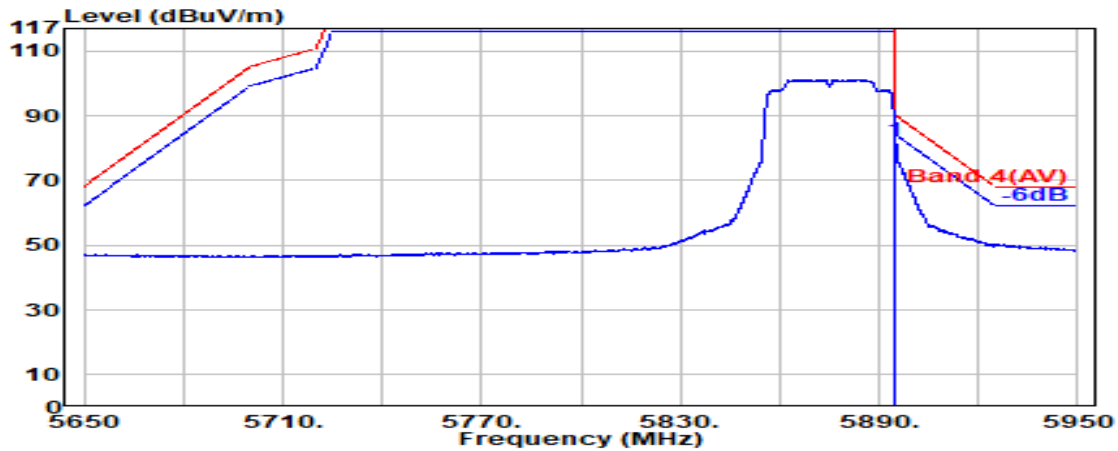


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	78.54	82.37	90.20	7.83	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

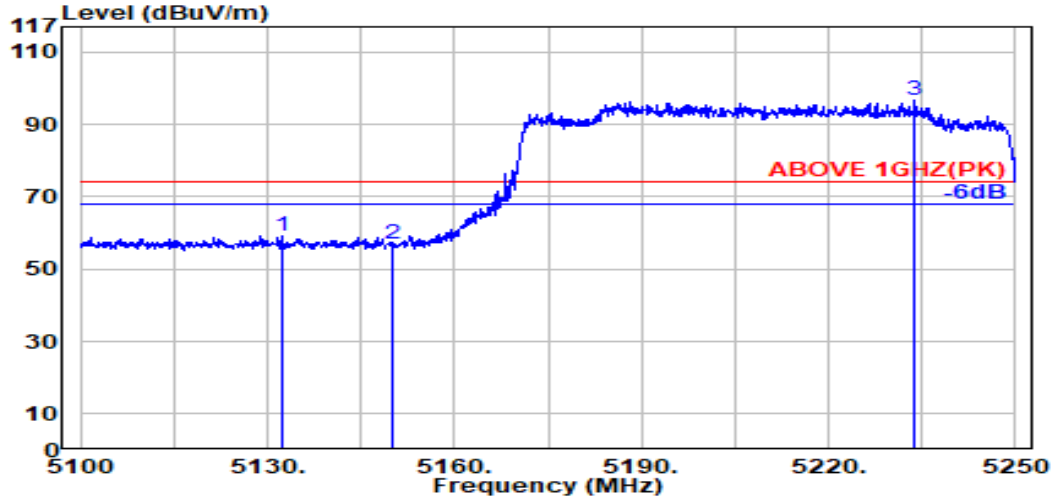

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.400	33.46	8.36	39.27	56.75	59.30	74.00	14.70	Peak
5150.000	33.50	8.37	39.27	54.15	56.75	74.00	17.25	Peak
@ 5233.900	33.73	8.46	39.27	93.64	96.57	---	---	Peak

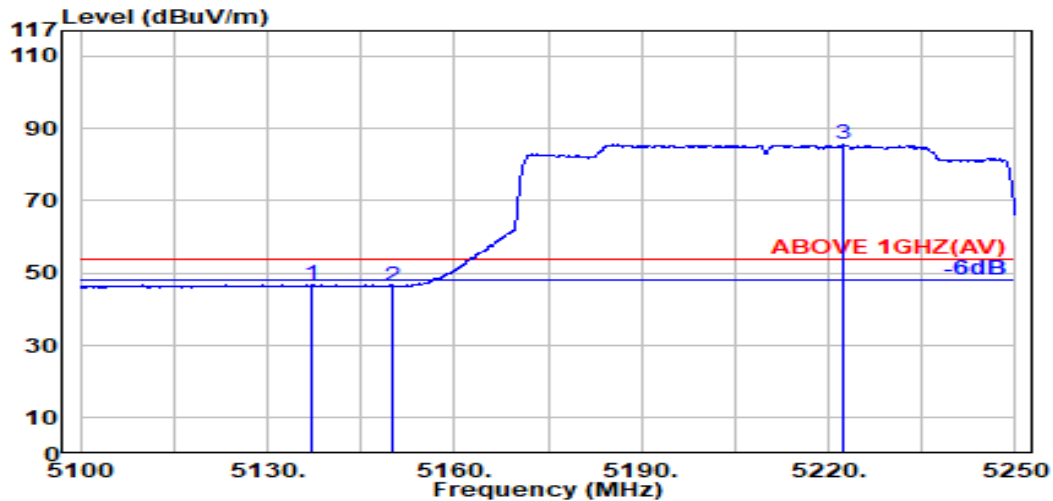


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	33.47	8.36	39.27	44.27	46.84	54.00	7.16	Average
5150.000	33.50	8.37	39.27	43.87	46.47	54.00	7.53	Average
@ 5222.300	33.76	8.45	39.27	82.66	85.59	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

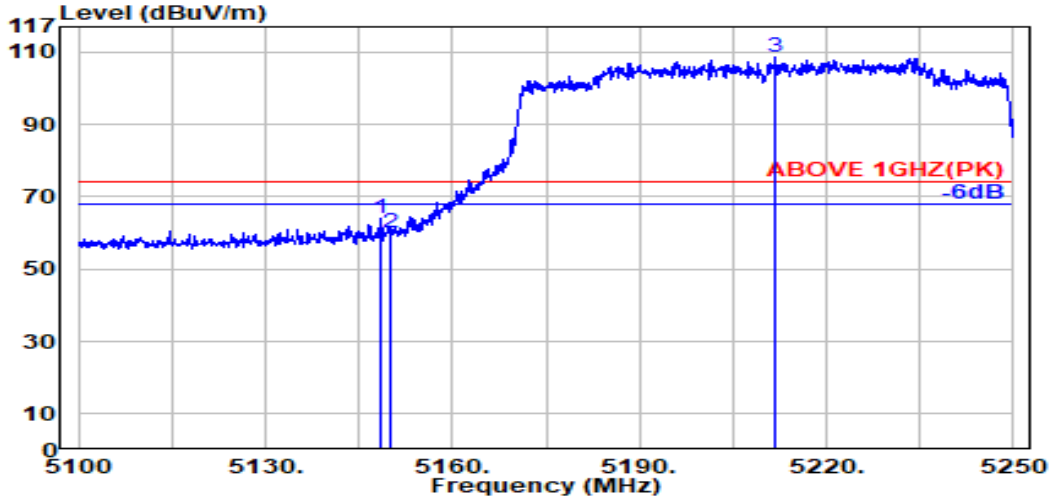

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.50	8.37	39.27	61.51	64.11	74.00	9.89	Peak
5150.000	33.50	8.37	39.27	57.63	60.23	74.00	13.77	Peak
@ 5211.700	33.78	8.44	39.27	105.80	108.75	---	---	Peak

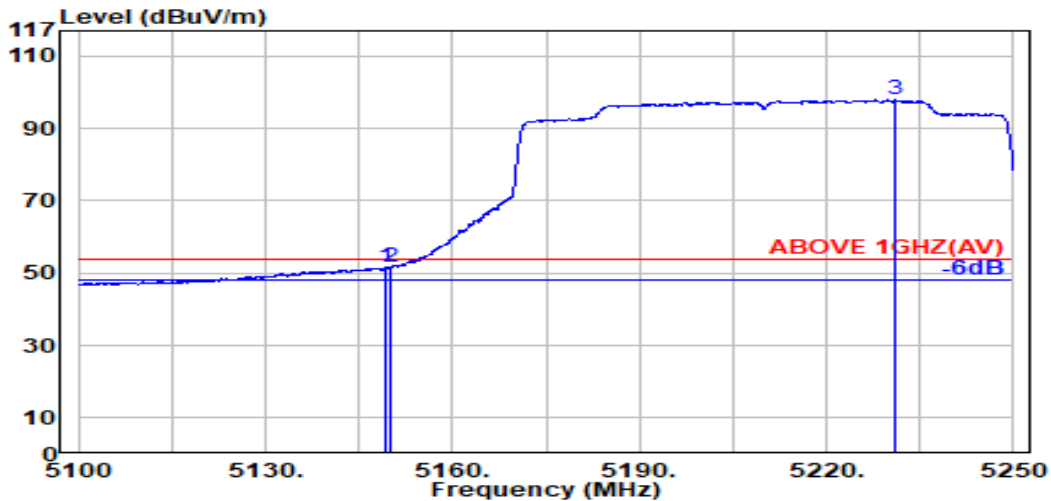


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.27	49.17	51.78	54.00	2.22	Average
5150.000	33.50	8.37	39.27	48.92	51.53	54.00	2.47	Average
@ 5231.100	33.74	8.46	39.27	95.06	97.98	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

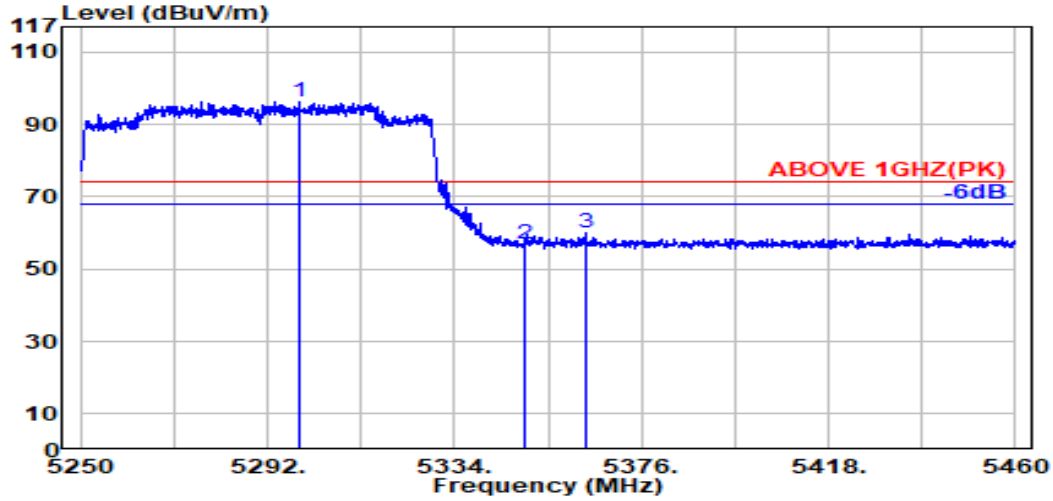

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.200	33.80	8.52	39.26	93.33	96.39	---	---	Peak
5350.000	33.70	8.57	39.26	54.01	57.02	74.00	16.98	Peak
5363.300	33.75	8.59	39.26	56.93	60.01	74.00	13.99	Peak

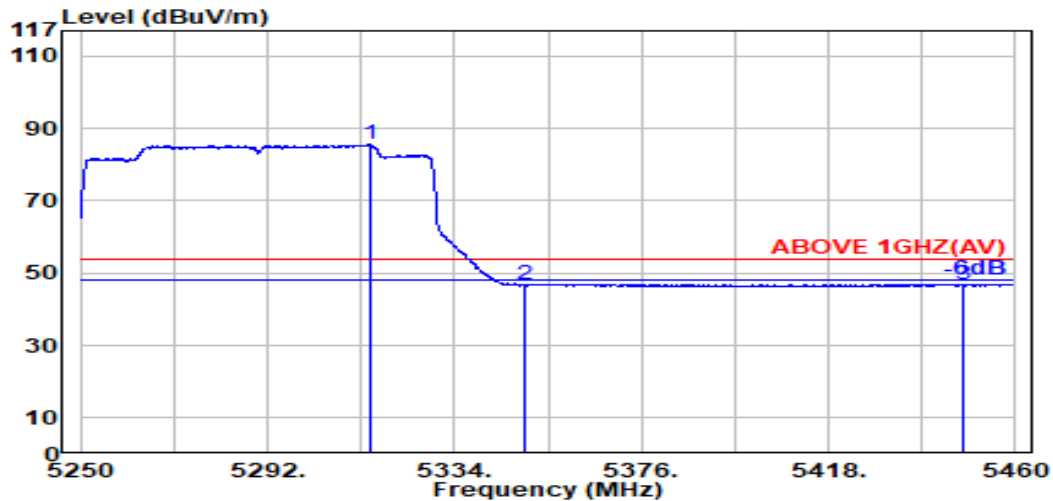


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.200	33.77	8.54	39.26	82.56	85.61	---	---	Average
5350.000	33.70	8.57	39.26	43.74	46.75	54.00	7.25	Average
5448.200	34.00	8.67	39.25	43.61	47.02	54.00	6.98	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

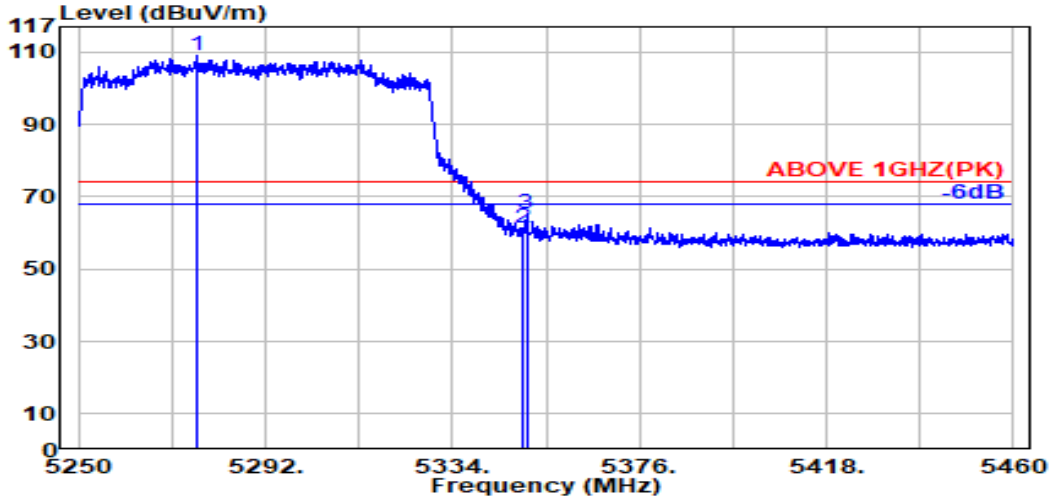

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.500	33.75	8.50	39.26	106.02	109.01	---	---	Peak
5350.000	33.70	8.57	39.26	58.21	61.22	74.00	12.78	Peak
5350.600	33.70	8.57	39.26	62.22	65.24	74.00	8.76	Peak

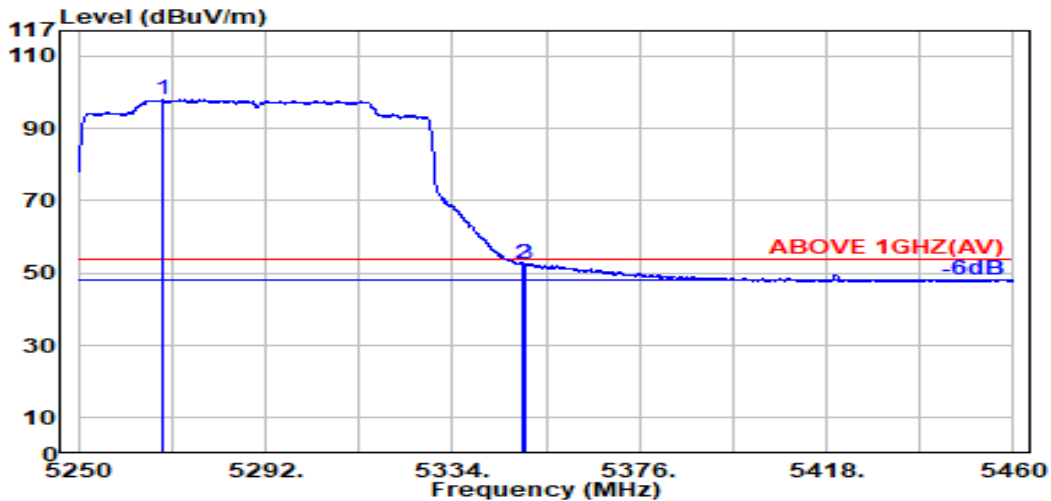


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.100	33.74	8.49	39.26	94.93	97.89	---	---	Average
5350.000	33.70	8.57	39.26	49.46	52.48	54.00	1.52	Average
5350.500	33.70	8.57	39.26	49.62	52.64	54.00	1.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

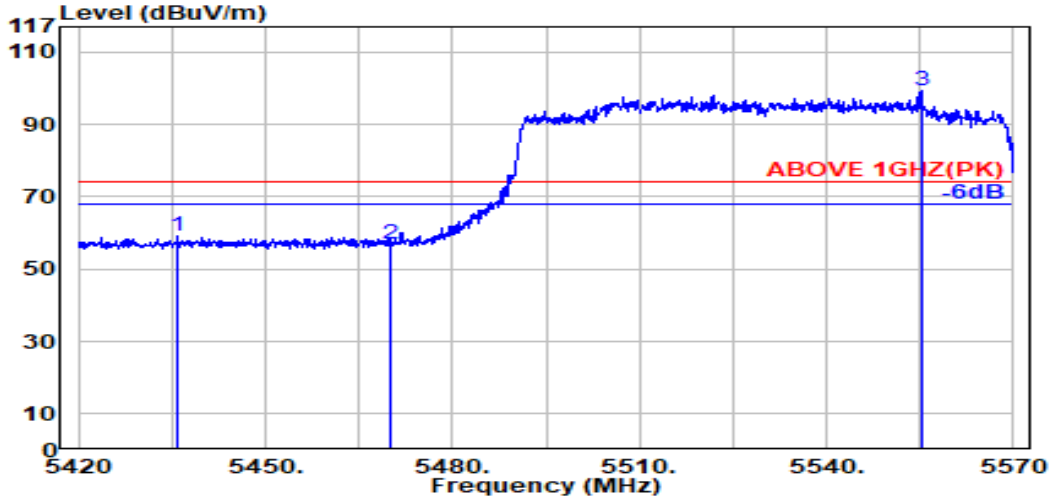

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.900	33.97	8.66	39.25	55.62	58.99	74.00	15.01	Peak
5470.000	34.04	8.69	39.25	53.65	57.12	74.00	16.88	Peak
@ 5555.200	33.98	8.77	39.26	95.68	99.16	---	---	Peak

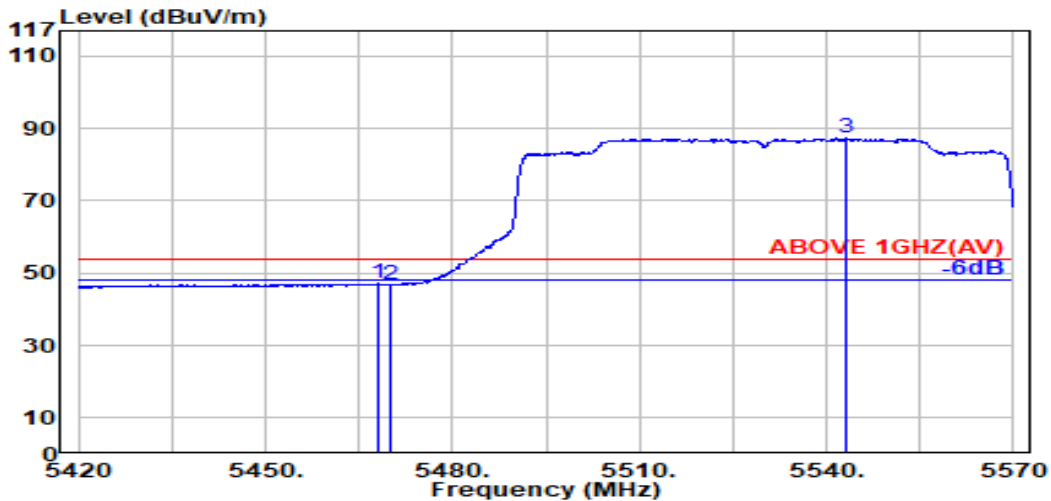


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.25	43.59	47.06	54.00	6.94	Average
5470.000	34.04	8.69	39.25	43.44	46.92	54.00	7.08	Average
@ 5543.200	34.01	8.76	39.26	83.89	87.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

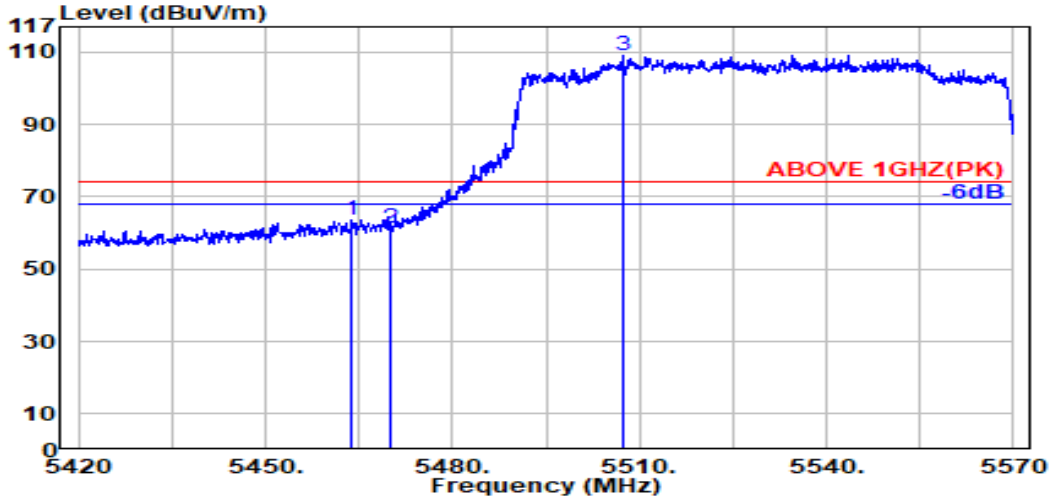

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.03	8.68	39.25	60.31	63.77	74.00	10.23	Peak
5470.000	34.04	8.69	39.25	57.80	61.27	74.00	12.73	Peak
@ 5507.200	34.09	8.72	39.25	105.60	109.15	---	---	Peak

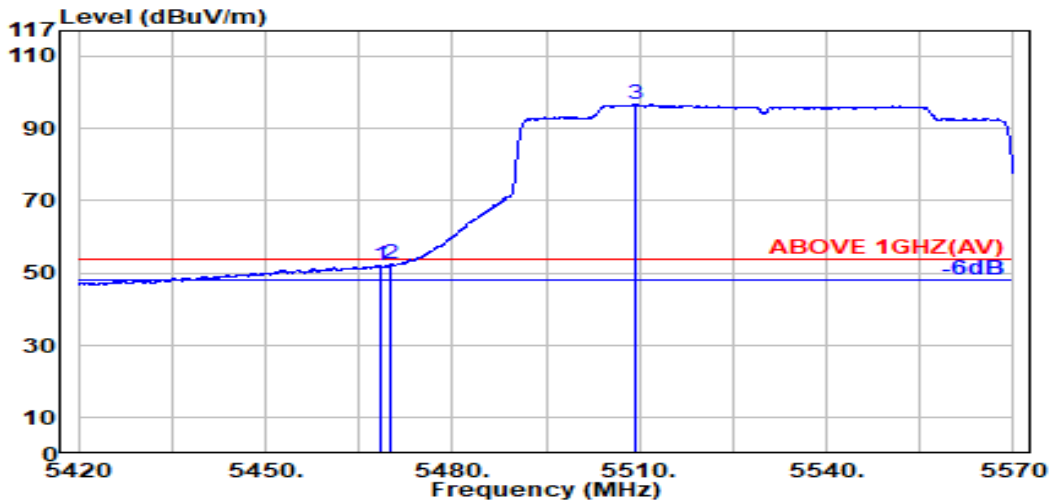


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.25	48.46	51.93	54.00	2.07	Average
5470.000	34.04	8.69	39.25	48.95	52.43	54.00	1.57	Average
@ 5509.500	34.08	8.73	39.25	93.18	96.73	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

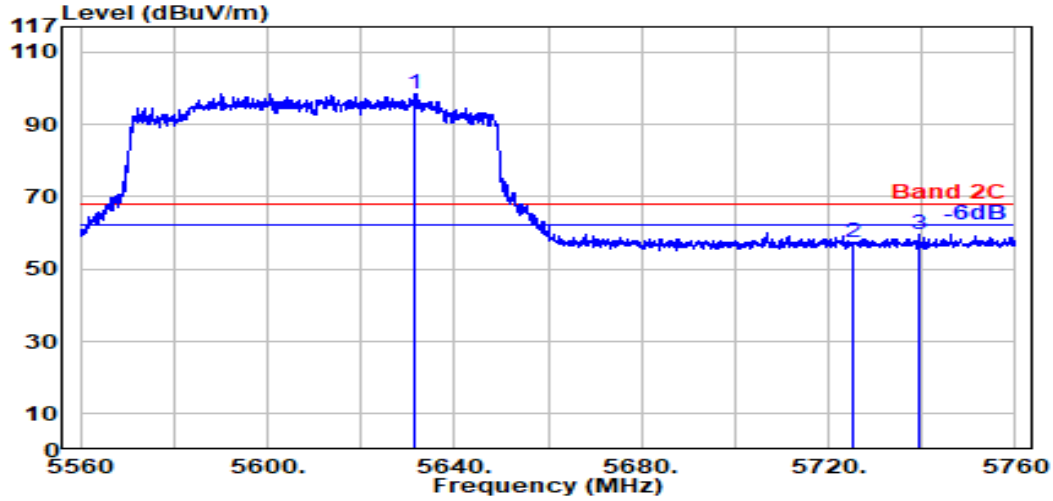

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.700	33.80	8.84	39.27	95.09	98.45	---	---	Peak
5725.000	33.60	8.93	39.29	54.37	57.60	68.20	10.60	Peak
5739.300	33.60	8.94	39.29	56.31	59.55	68.20	8.65	Peak

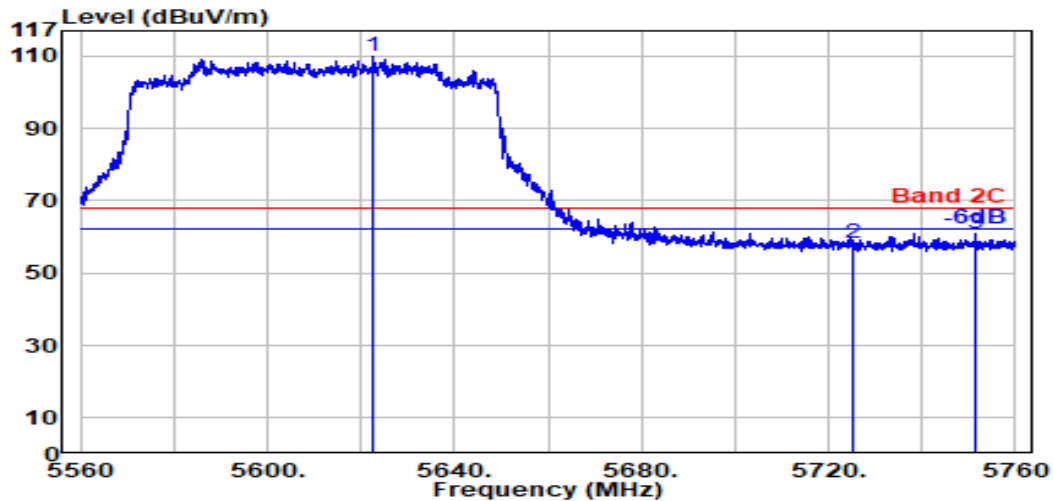


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.400	33.80	8.83	39.27	106.53	109.89	---	---	Peak
5725.000	33.60	8.93	39.29	54.84	58.07	68.20	10.13	Peak
5751.300	33.61	8.95	39.30	57.83	61.09	68.20	7.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

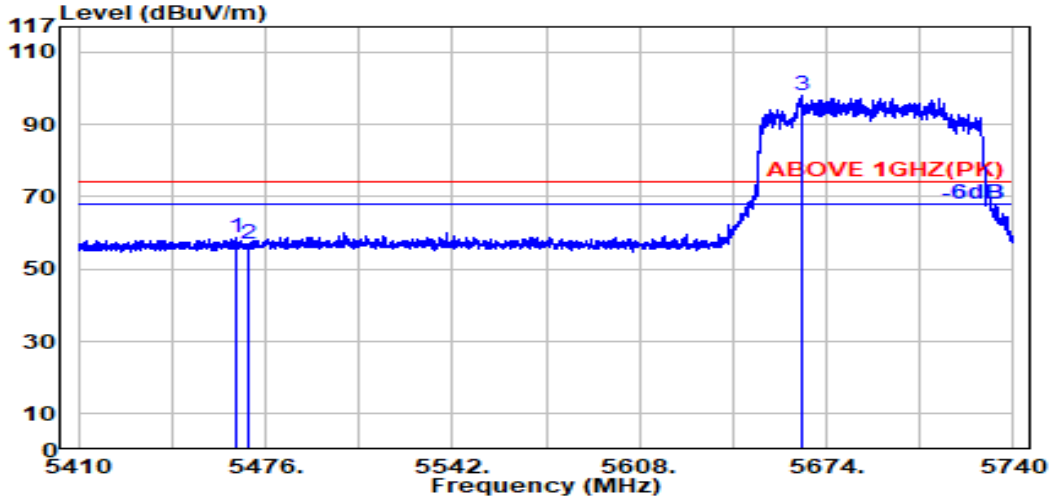

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.25	55.25	58.71	74.00	15.29	Peak
5470.000	34.04	8.69	39.25	53.35	56.83	74.00	17.17	Peak
@ 5665.400	33.74	8.87	39.28	94.76	98.09	---	---	Peak

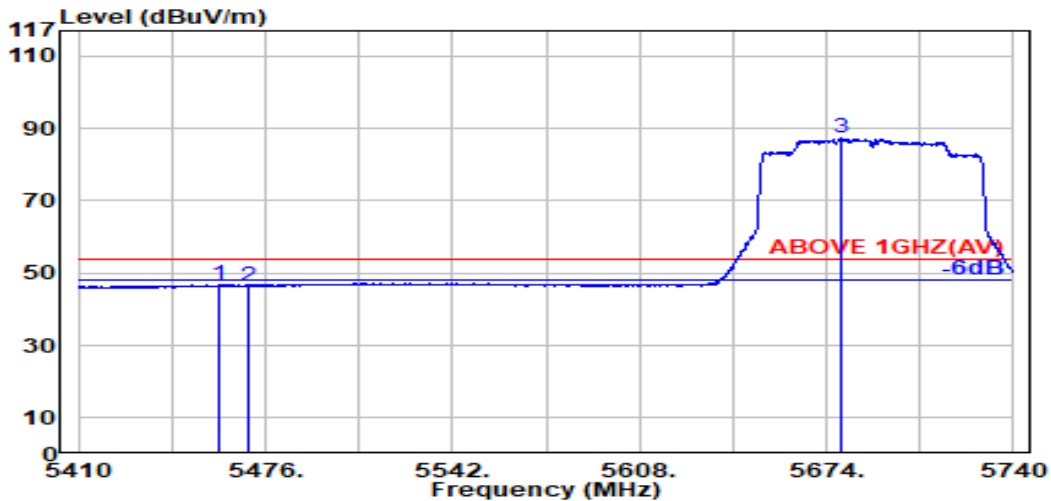


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.02	8.68	39.25	43.25	46.70	54.00	7.30	Average
5470.000	34.04	8.69	39.25	43.02	46.50	54.00	7.50	Average
@ 5679.300	33.68	8.88	39.28	83.94	87.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

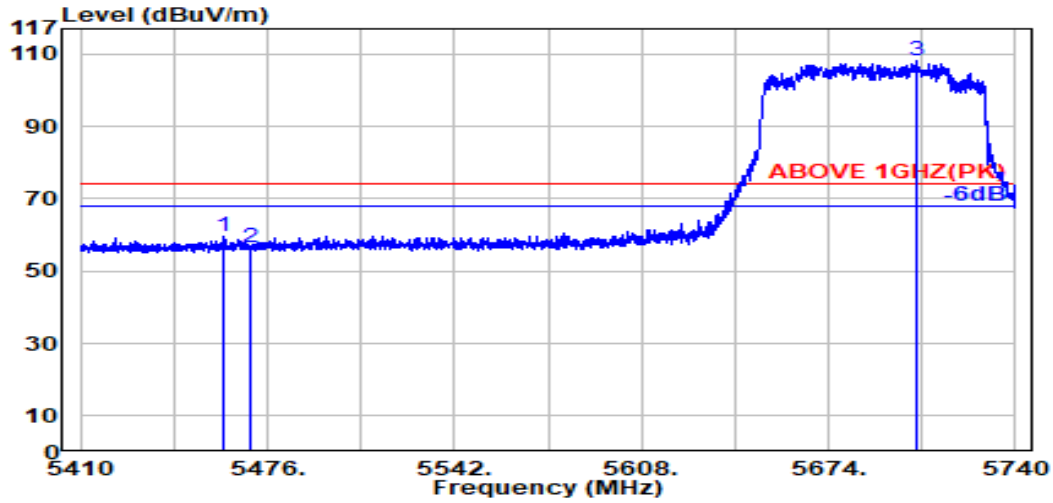

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.02	8.68	39.25	56.01	59.46	74.00	14.54	Peak
5470.000	34.04	8.69	39.25	53.04	56.52	74.00	17.48	Peak
@ 5704.800	33.60	8.91	39.29	104.89	108.11	---	---	Peak

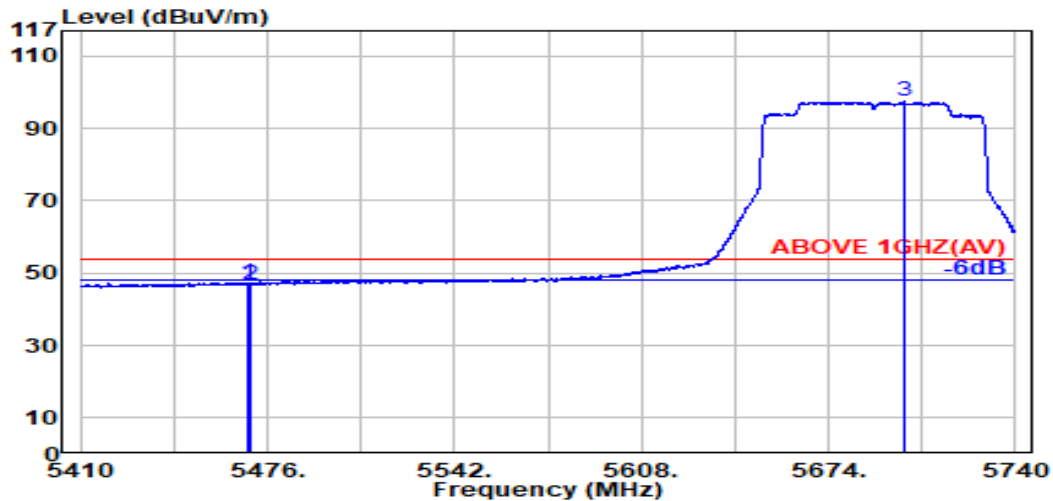


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.25	43.91	47.39	54.00	6.61	Average
5470.000	34.04	8.69	39.25	43.31	46.79	54.00	7.21	Average
@ 5700.800	33.60	8.90	39.29	94.14	97.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

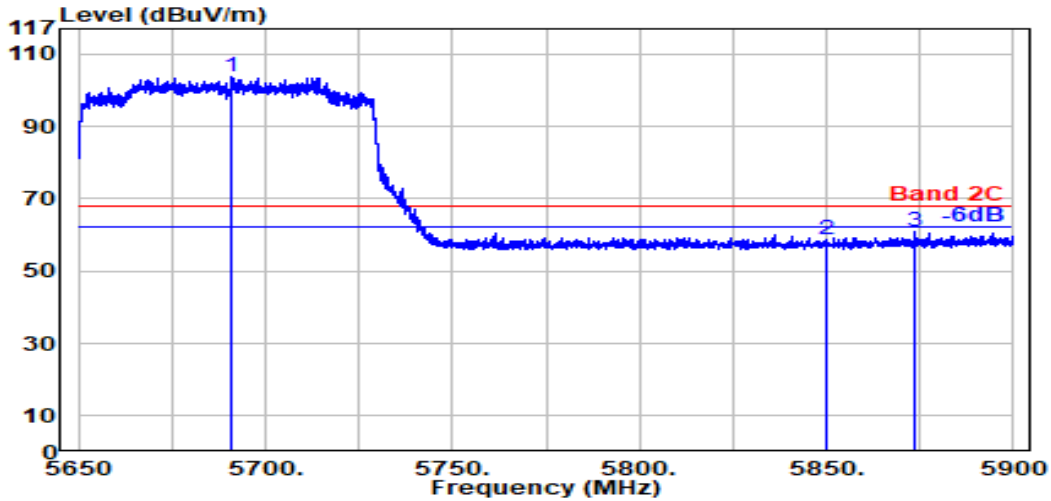

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5690.929	33.64	8.89	39.29	100.54	103.79	---	---	Peak
5850.000	33.90	9.04	39.31	54.88	58.51	68.20	9.69	Peak
5873.643	33.99	9.06	39.32	56.98	60.72	68.20	7.48	Peak

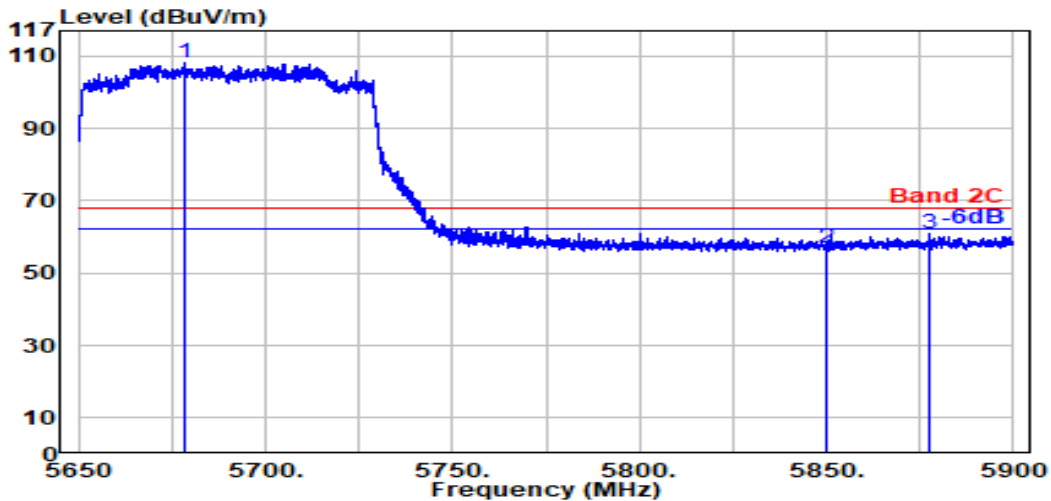

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.286	33.69	8.88	39.28	104.98	108.27	---	---	Peak
5850.000	33.90	9.04	39.31	53.47	57.09	68.20	11.11	Peak
5877.643	34.01	9.06	39.32	57.10	60.85	68.20	7.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

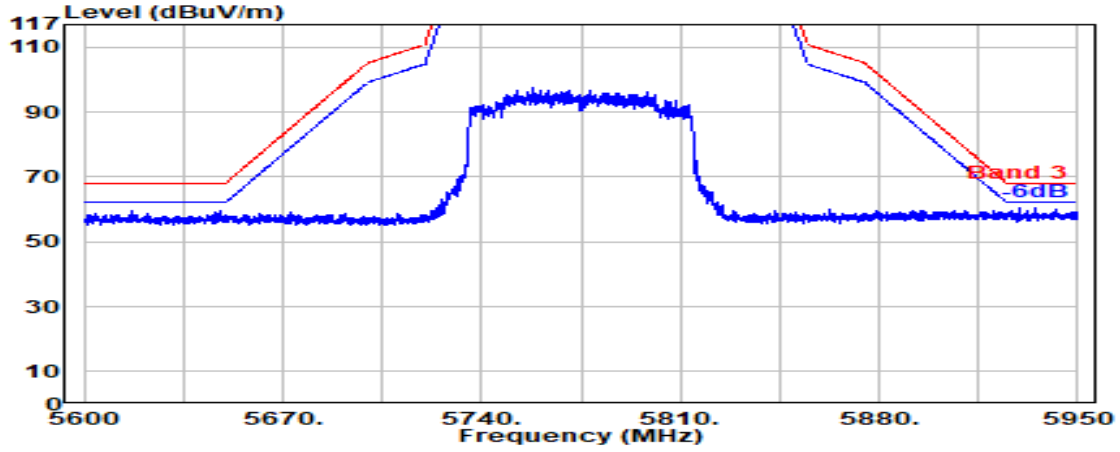

Antenna at Vertical Polarization

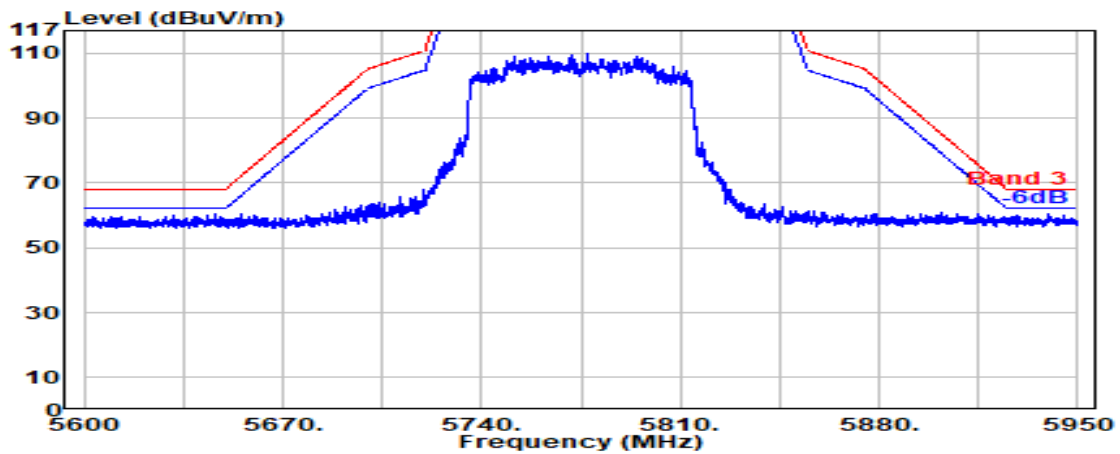


Mode	802.11ax-HE80	U-NII Band	4
		Frequency	TX 5855MHz

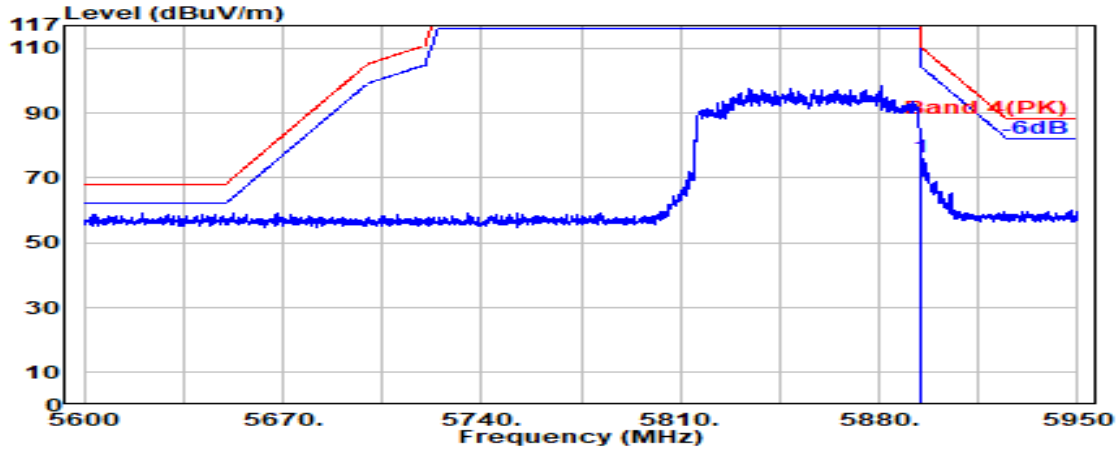

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	72.43	76.26	110.16	33.90	Peak

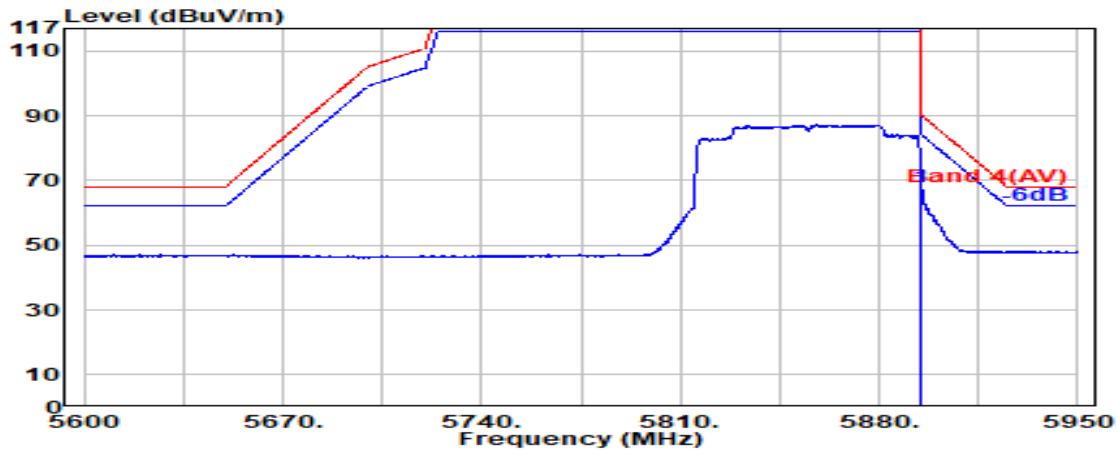


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	64.17	68.01	90.16	22.15	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE80	U-NII Band	4
		Frequency	TX 5855MHz

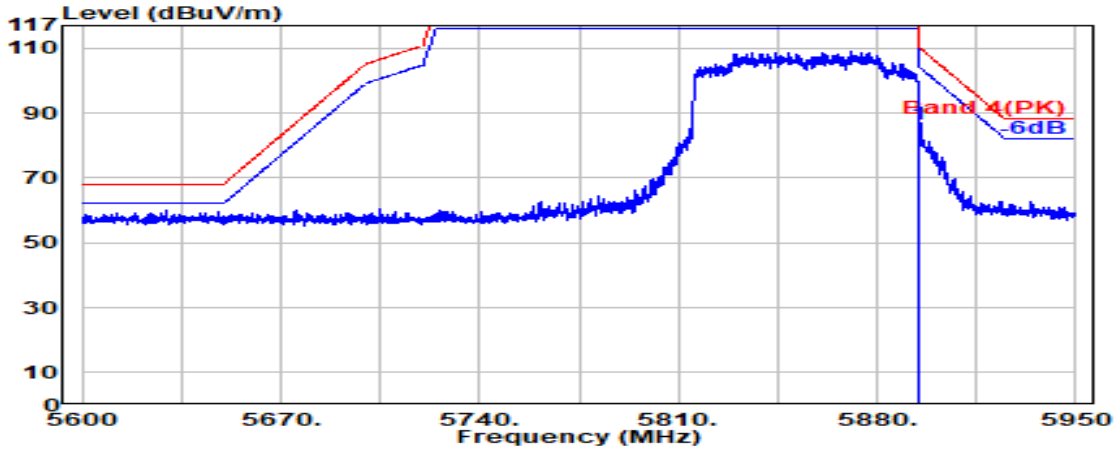

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	82.54	86.37	110.16	23.79	Peak

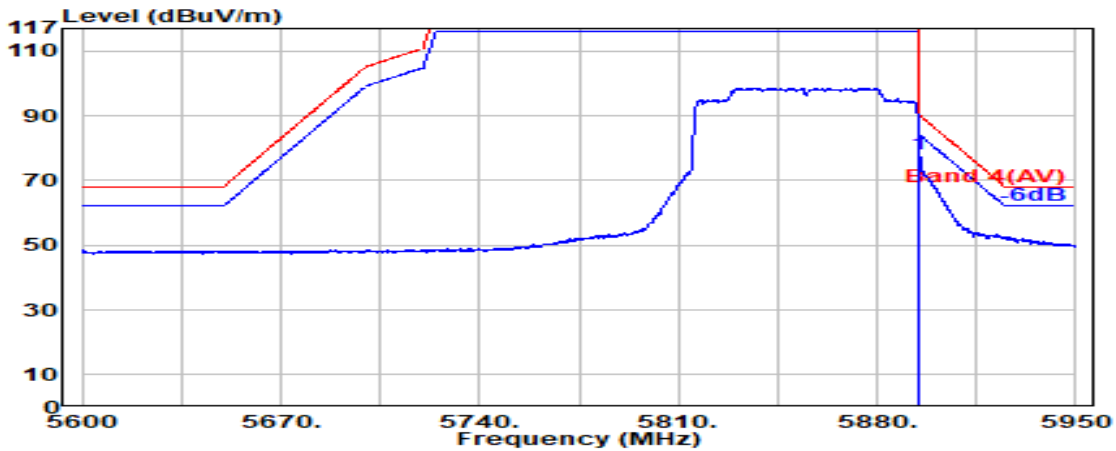


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	74.49	78.32	90.16	11.84	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

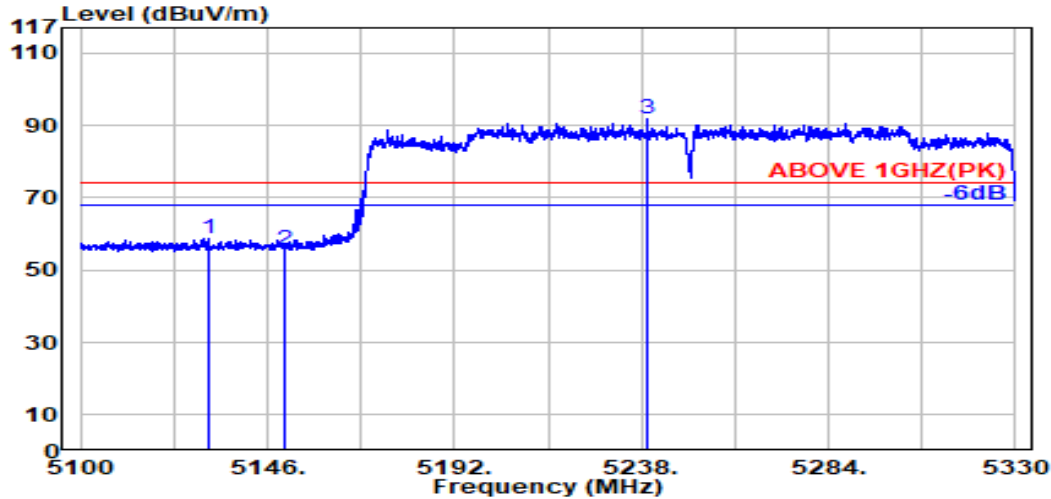

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.300	33.46	8.36	39.27	55.98	58.53	74.00	15.47	Peak
5150.000	33.50	8.37	39.27	53.12	55.72	74.00	18.28	Peak
@ 5239.400	33.72	8.46	39.27	89.05	91.97	---	---	Peak

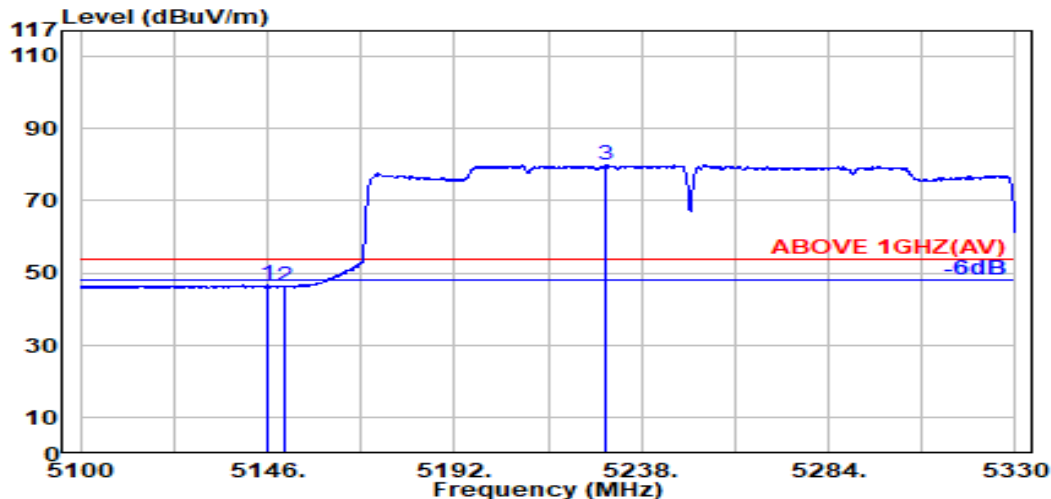


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.49	8.37	39.27	44.07	46.66	54.00	7.34	Average
5150.000	33.50	8.37	39.27	43.65	46.26	54.00	7.74	Average
@ 5229.400	33.74	8.45	39.27	76.96	79.89	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

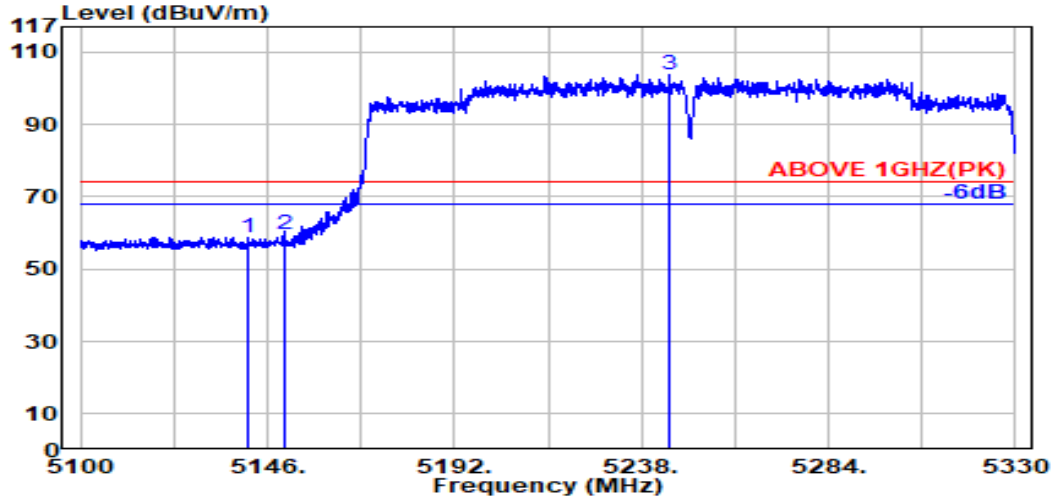

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.200	33.48	8.37	39.27	56.25	58.82	74.00	15.18	Peak
5150.000	33.50	8.37	39.27	56.81	59.41	74.00	14.59	Peak
@ 5245.100	33.71	8.47	39.26	100.83	103.74	---	---	Peak

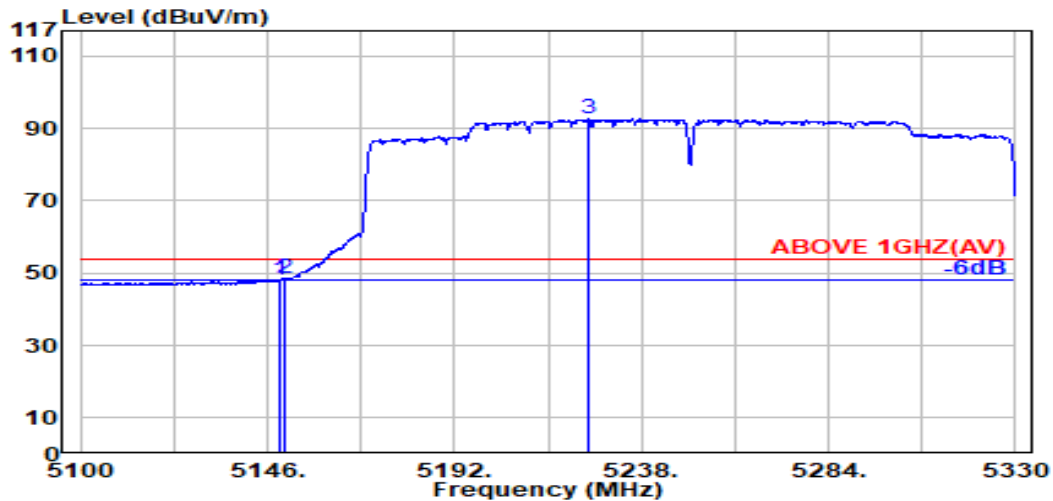


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.27	45.65	48.26	54.00	5.74	Average
5150.000	33.50	8.37	39.27	45.91	48.51	54.00	5.49	Average
@ 5225.000	33.75	8.45	39.27	89.63	92.56	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

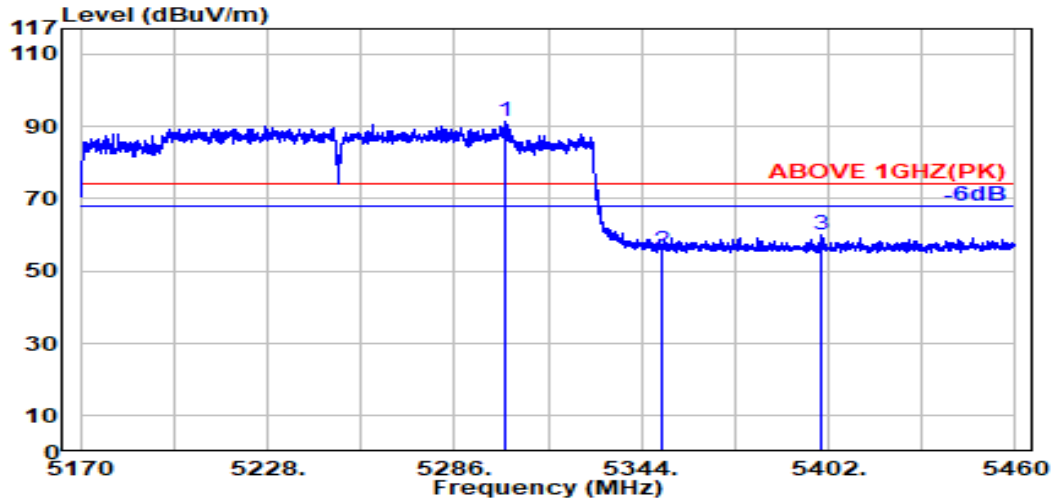

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	33.80	8.53	39.26	88.44	91.50	---	---	Peak
5350.000	33.70	8.57	39.26	52.70	55.71	74.00	18.29	Peak
5400.000	33.90	8.62	39.26	56.65	59.91	74.00	14.09	Peak

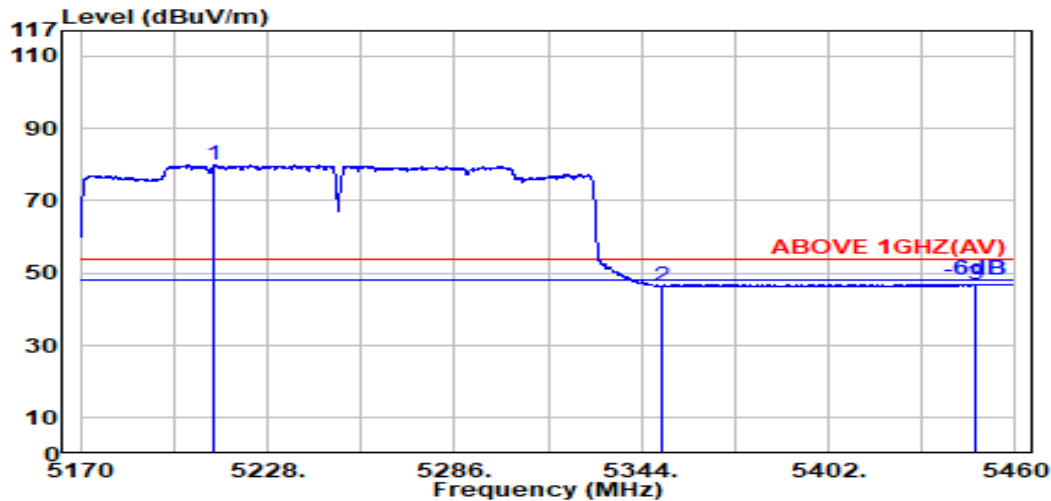


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5211.400	33.78	8.44	39.27	76.94	79.89	---	---	Average
5350.000	33.70	8.57	39.26	43.39	46.41	54.00	7.59	Average
5447.800	34.00	8.67	39.25	43.55	46.96	54.00	7.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

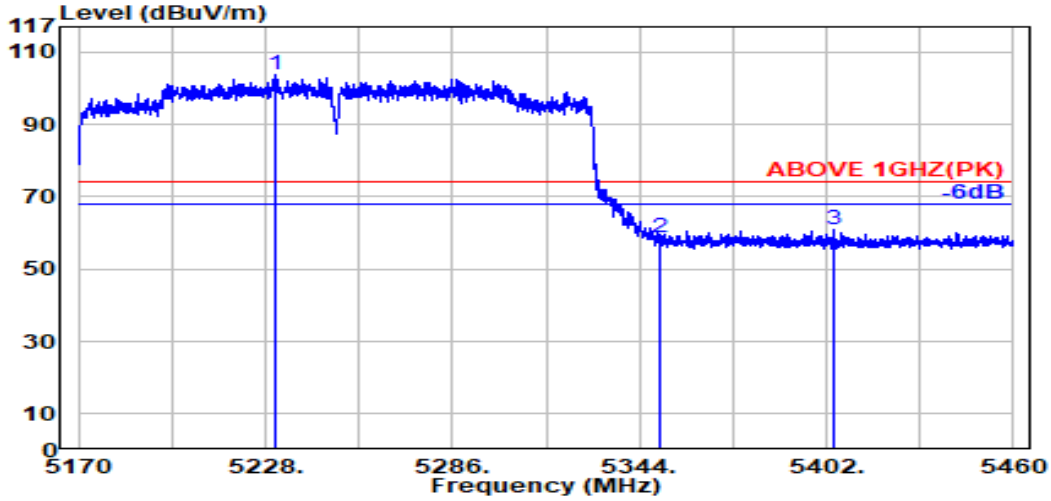

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.400	33.74	8.46	39.27	100.93	103.86	---	---	Peak
5350.000	33.70	8.57	39.26	55.54	58.56	74.00	15.44	Peak
5404.200	33.91	8.63	39.26	57.44	60.72	74.00	13.28	Peak

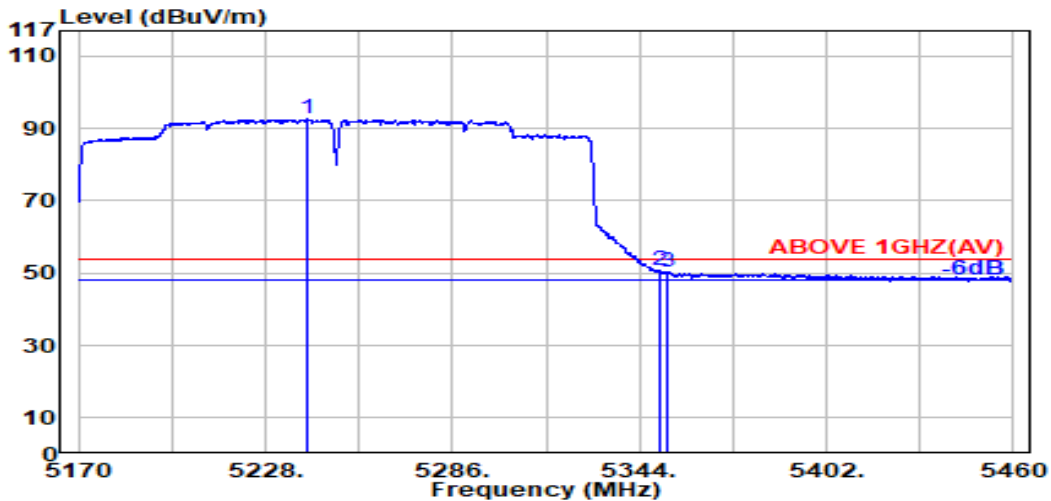


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5241.000	33.72	8.47	39.27	89.59	92.50	---	---	Average
5350.000	33.70	8.57	39.26	47.56	50.58	54.00	3.42	Average
5352.800	33.71	8.58	39.26	47.43	50.46	54.00	3.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

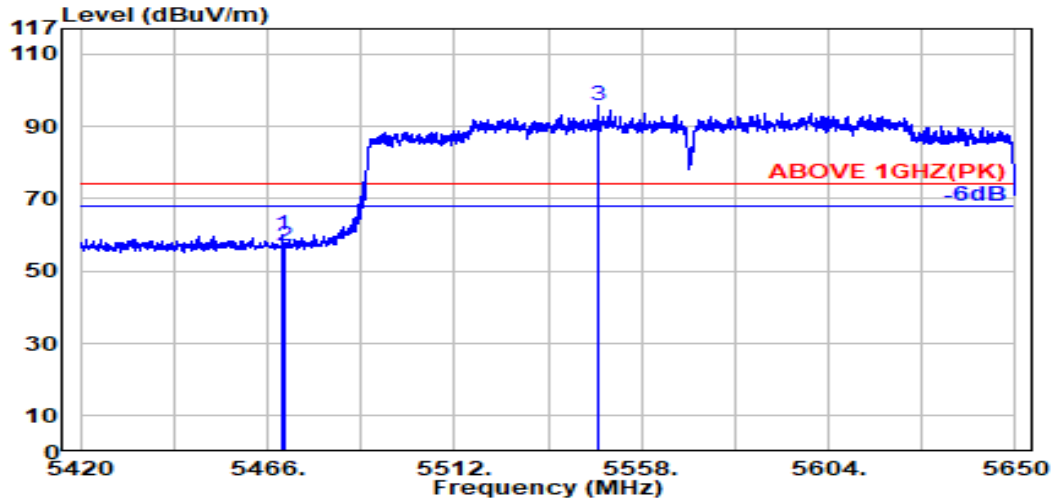

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.25	56.41	59.89	74.00	14.11	Peak
5470.000	34.04	8.69	39.25	53.37	56.85	74.00	17.15	Peak
@ 5547.400	34.01	8.76	39.26	92.24	95.75	---	---	Peak

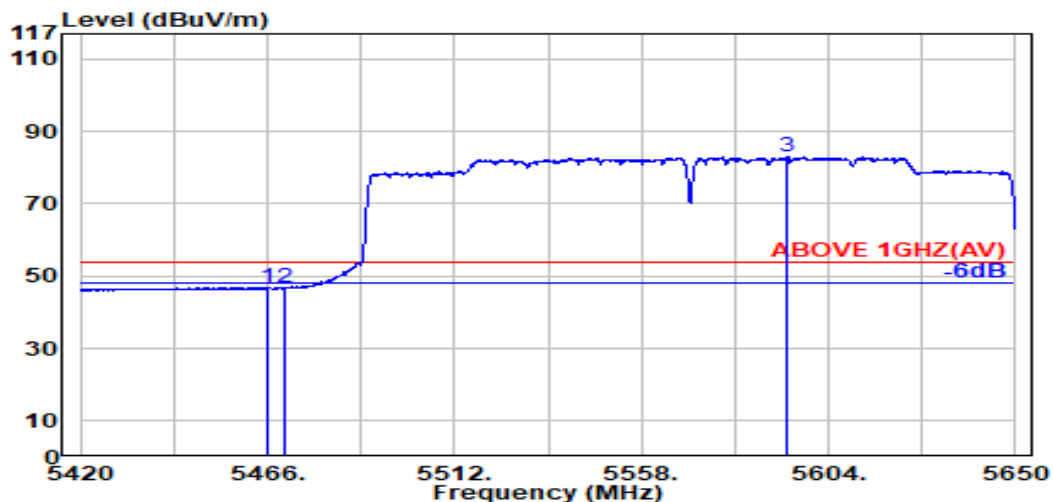


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.03	8.68	39.25	43.43	46.89	54.00	7.11	Average
5470.000	34.04	8.69	39.25	43.18	46.66	54.00	7.34	Average
@ 5593.600	33.83	8.80	39.27	79.60	82.96	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

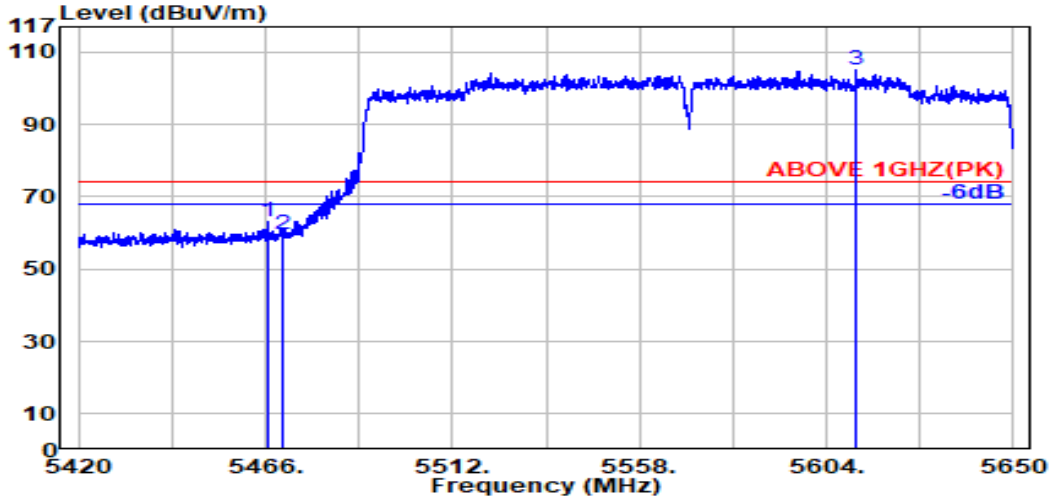

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.25	59.54	63.01	74.00	10.99	Peak
5470.000	34.04	8.69	39.25	56.13	59.60	74.00	14.40	Peak
@ 5611.200	33.80	8.82	39.27	101.92	105.27	---	---	Peak

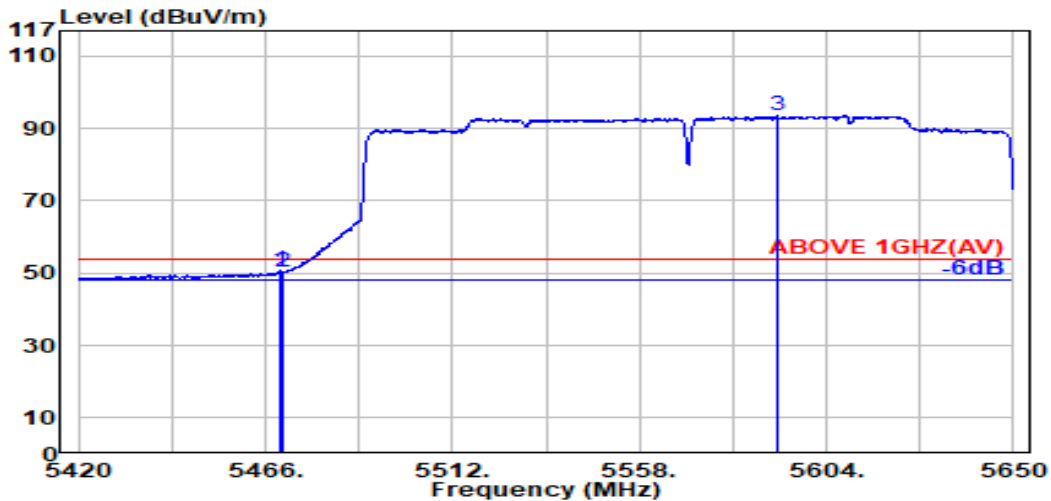


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.04	8.69	39.25	47.09	50.57	54.00	3.43	Average
5470.000	34.04	8.69	39.25	46.71	50.19	54.00	3.81	Average
@ 5591.900	33.83	8.80	39.27	90.07	93.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

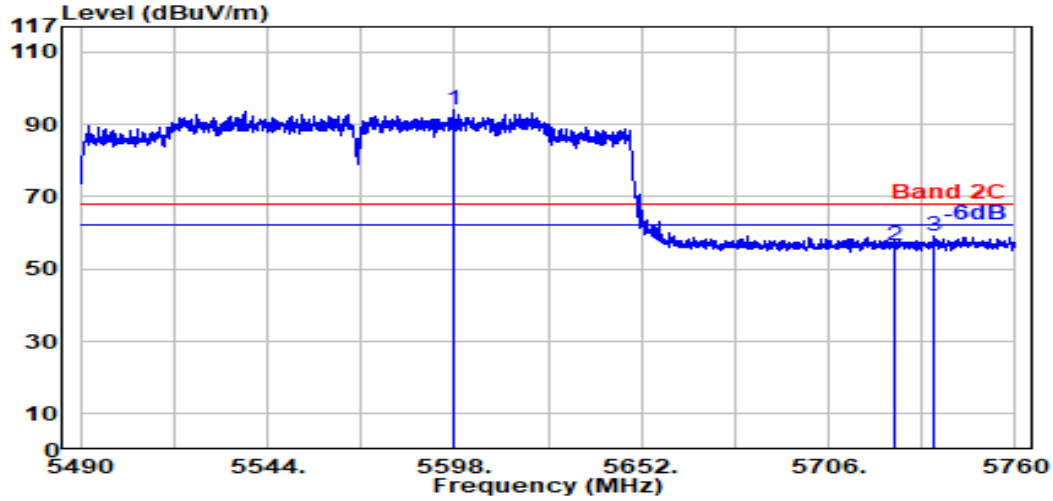

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5597.600	33.81	8.81	39.27	90.49	93.84	---	---	Peak
5725.000	33.60	8.93	39.29	53.14	56.38	68.20	11.82	Peak
5736.300	33.60	8.94	39.29	55.80	59.04	68.20	9.16	Peak

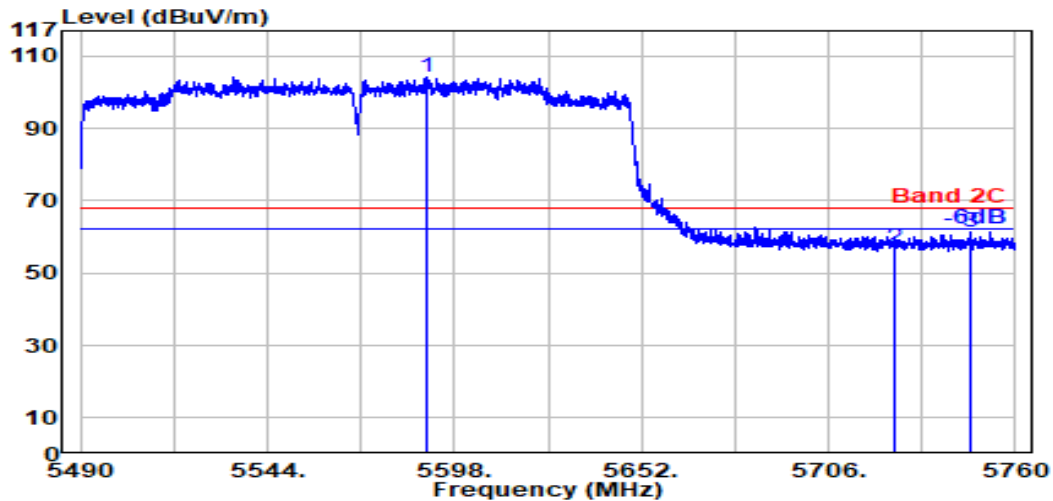


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.700	33.84	8.80	39.27	100.68	104.06	---	---	Peak
5725.000	33.60	8.93	39.29	53.65	56.88	68.20	11.32	Peak
5747.100	33.60	8.95	39.30	58.22	61.47	68.20	6.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE160	U-NII Band	4
		Frequency	TX 5815MHz

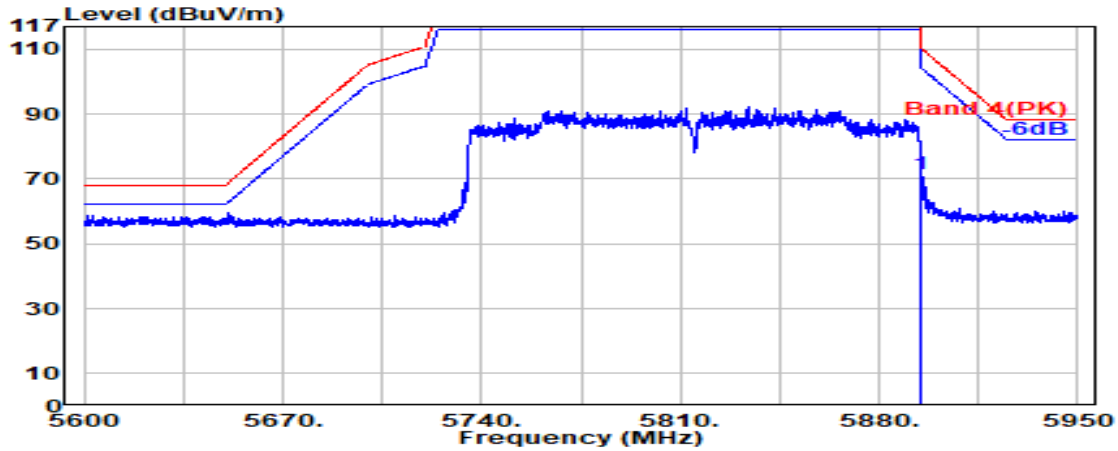

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	67.75	71.59	110.16	38.57	Peak

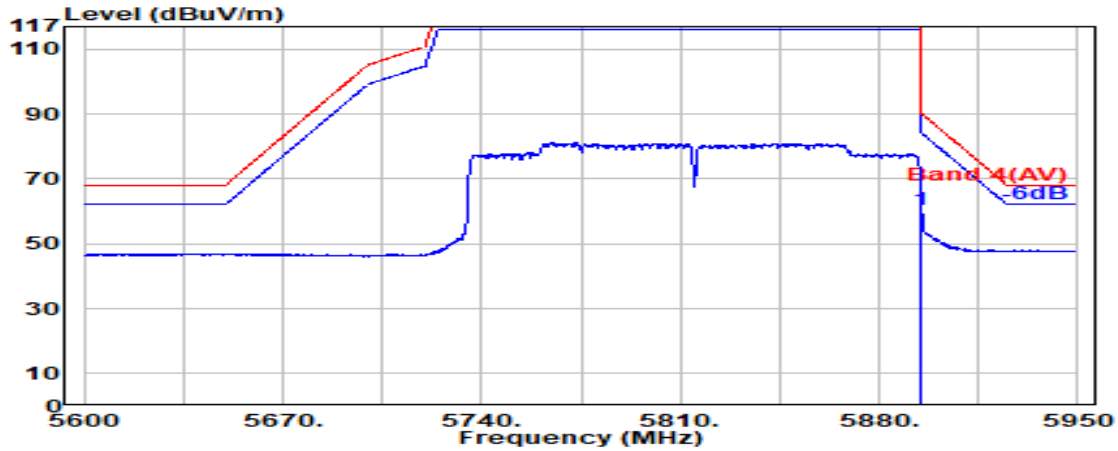


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	56.80	60.63	90.16	29.53	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE160	U-NII Band	4
		Frequency	TX 5815MHz

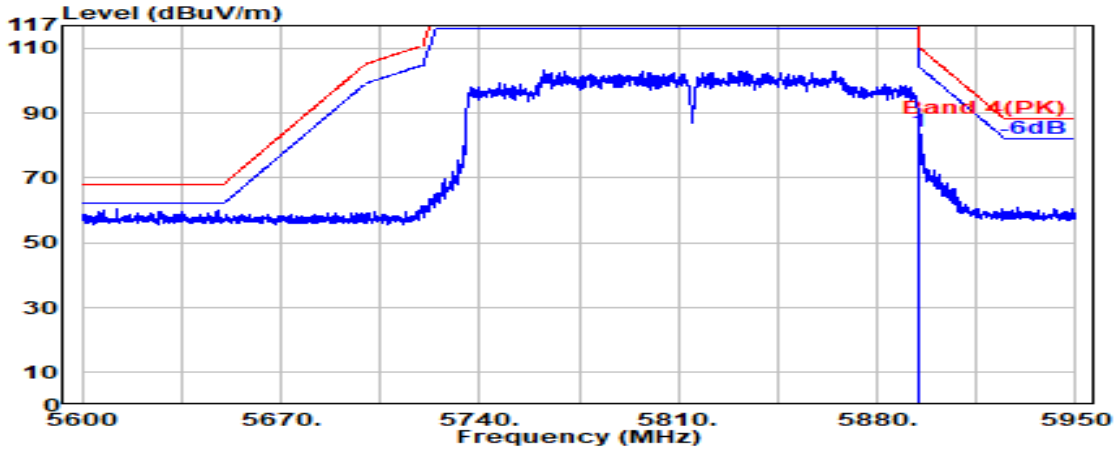

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	80.29	84.13	110.16	26.03	Peak

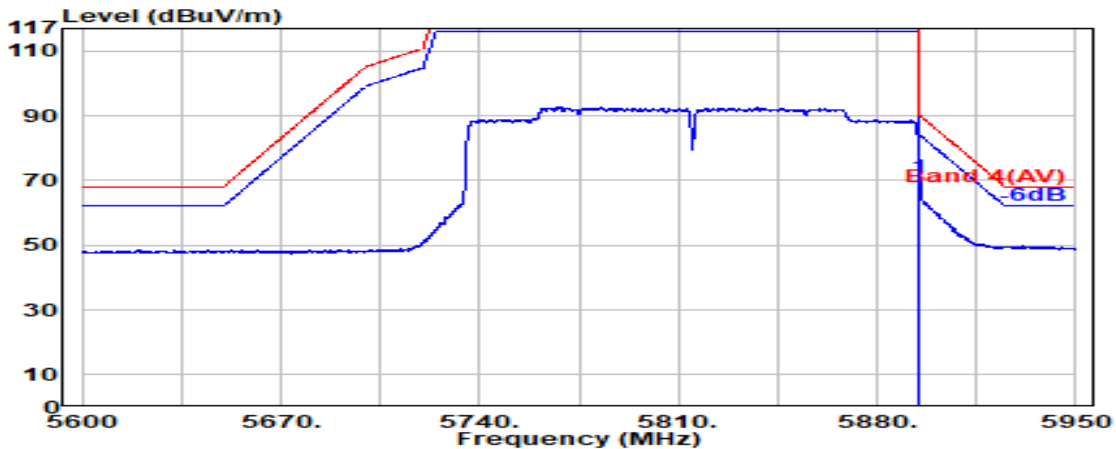


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	67.27	71.11	90.16	19.05	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

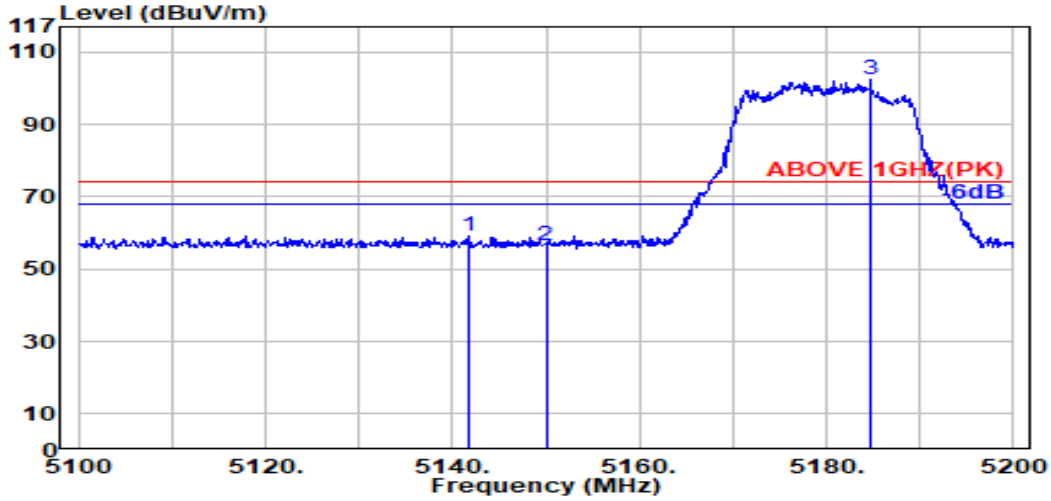

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	33.48	8.37	39.27	56.62	59.20	74.00	14.80	Peak
5150.000	33.50	8.37	39.27	53.84	56.45	74.00	17.55	Peak
@ 5184.700	33.71	8.41	39.27	99.40	102.25	---	---	Peak

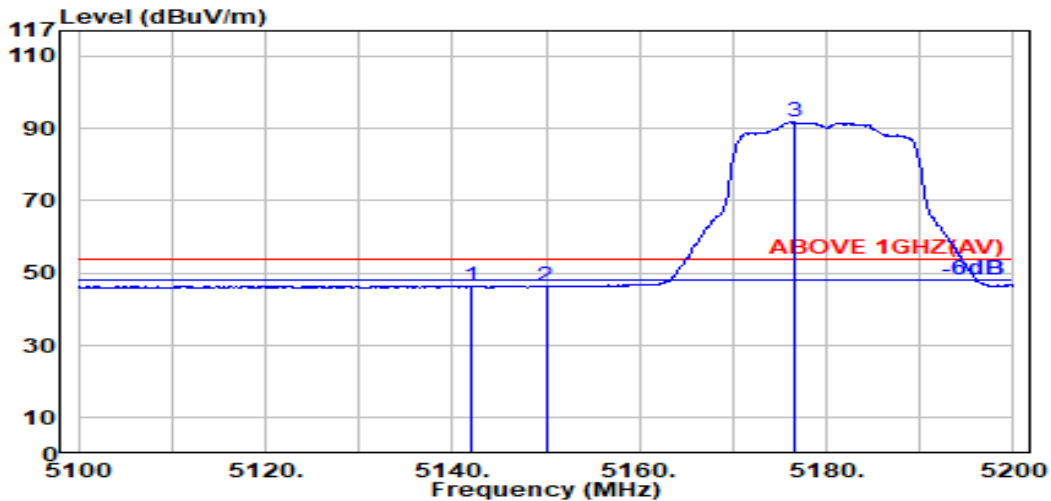


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	33.48	8.37	39.27	43.89	46.47	54.00	7.53	Average
5150.000	33.50	8.37	39.27	43.75	46.35	54.00	7.65	Average
@ 5176.500	33.66	8.40	39.27	89.22	92.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

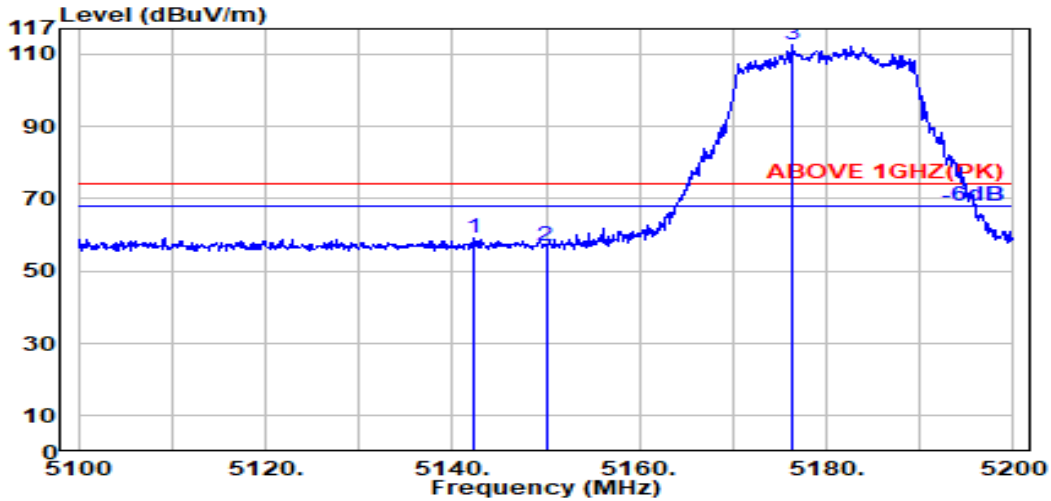

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	33.48	8.37	39.27	56.71	59.29	74.00	14.71	Peak
5150.000	33.50	8.37	39.27	54.31	56.91	74.00	17.09	Peak
@ 5176.300	33.66	8.40	39.27	109.75	112.54	---	---	Peak

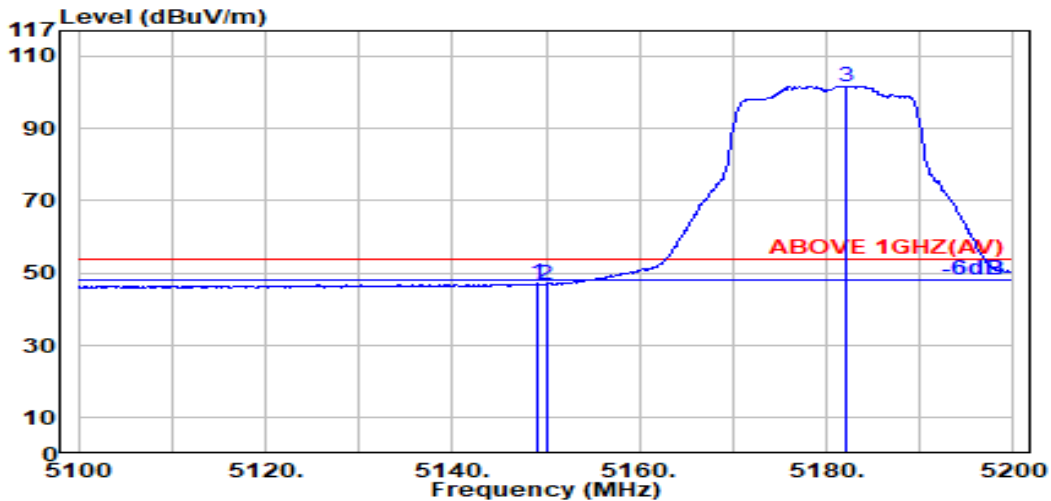


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.27	44.48	47.08	54.00	6.92	Average
5150.000	33.50	8.37	39.27	44.28	46.89	54.00	7.11	Average
@ 5182.000	33.69	8.41	39.27	98.93	101.76	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

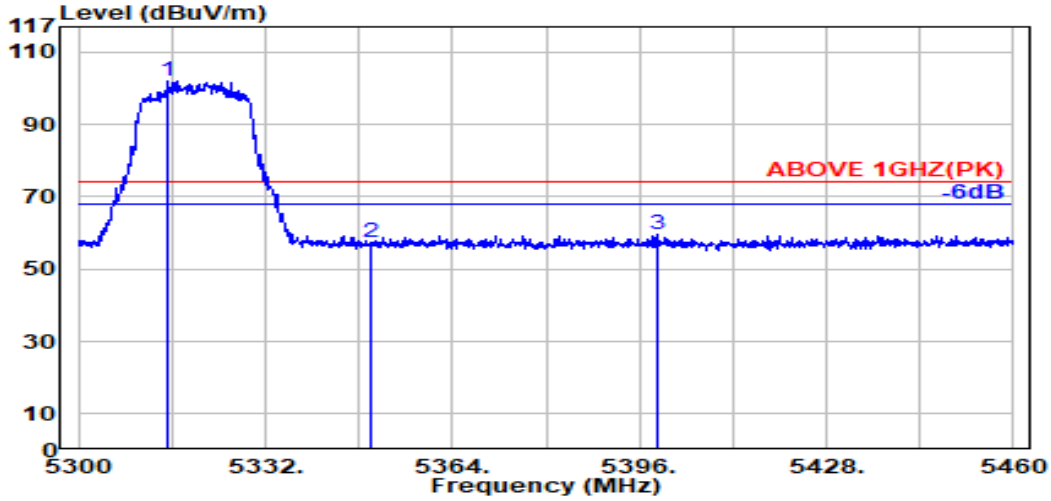

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.200	33.77	8.54	39.26	99.03	102.07	---	---	Peak
5350.000	33.70	8.57	39.26	54.20	57.21	74.00	16.79	Peak
5399.100	33.90	8.62	39.26	56.25	59.51	74.00	14.49	Peak

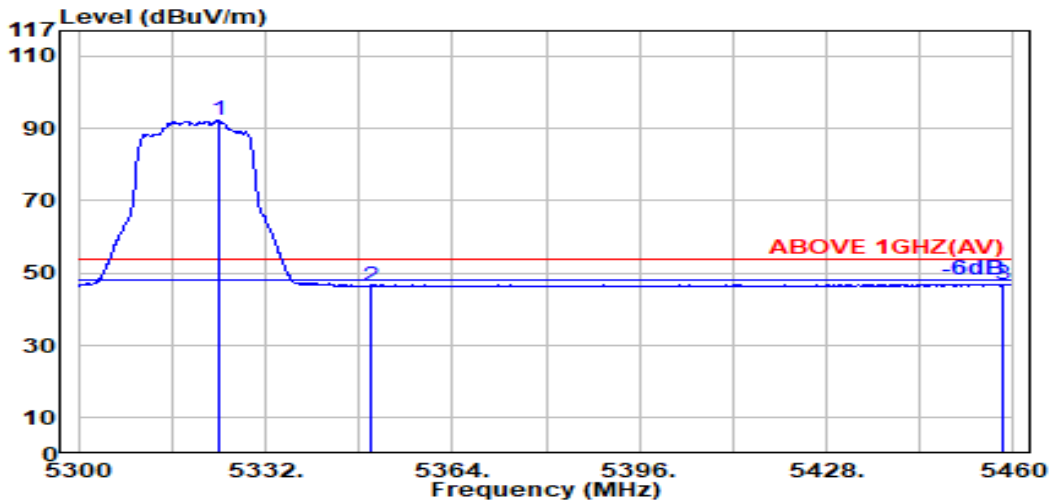


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.75	8.55	39.26	89.16	92.19	---	---	Average
5350.000	33.70	8.57	39.26	43.31	46.33	54.00	7.67	Average
5458.200	34.02	8.68	39.25	43.56	47.00	54.00	7.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

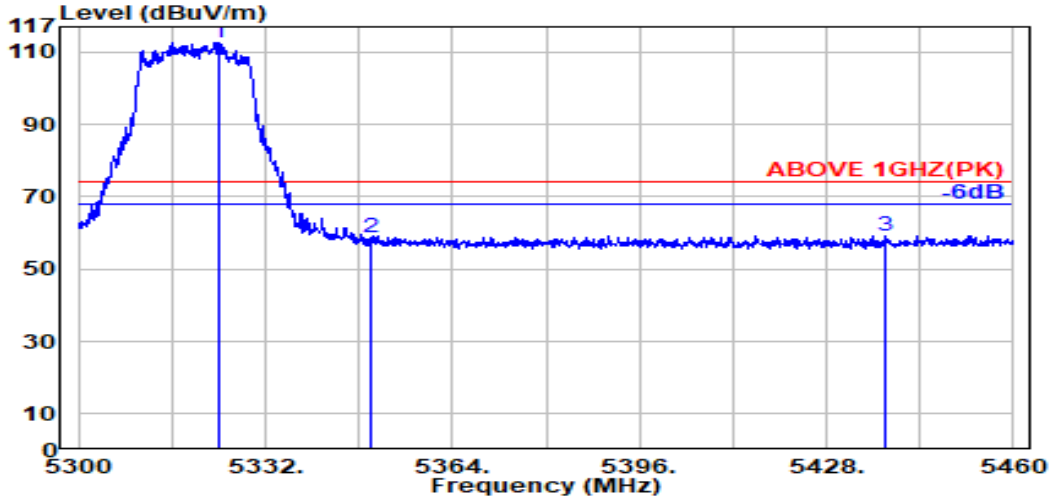

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	33.75	8.55	39.26	109.48	112.52	---	---	Peak
5350.000	33.70	8.57	39.26	55.65	58.67	74.00	15.33	Peak
5437.900	33.98	8.66	39.25	55.94	59.32	74.00	14.68	Peak

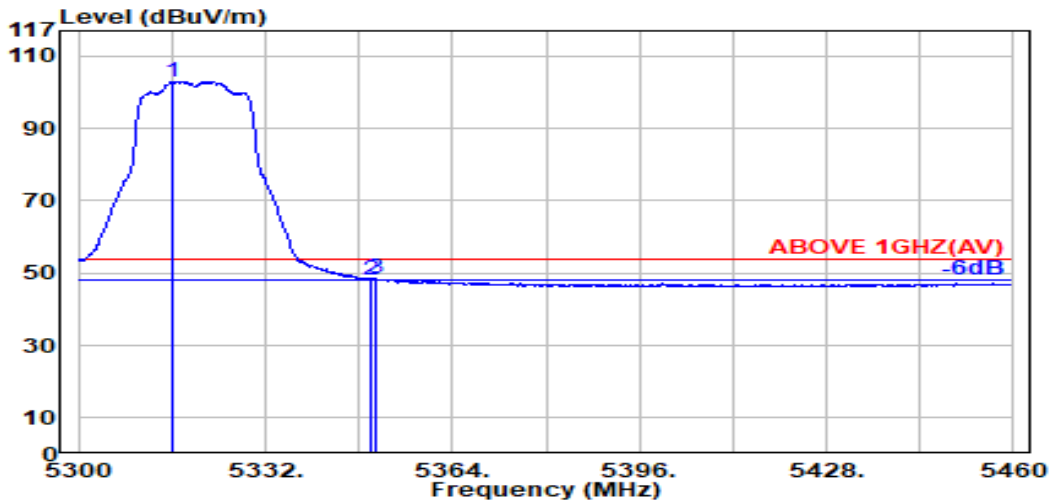


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.26	99.99	103.04	---	---	Average
5350.000	33.70	8.57	39.26	45.29	48.30	54.00	5.70	Average
5350.900	33.70	8.57	39.26	45.51	48.53	54.00	5.47	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

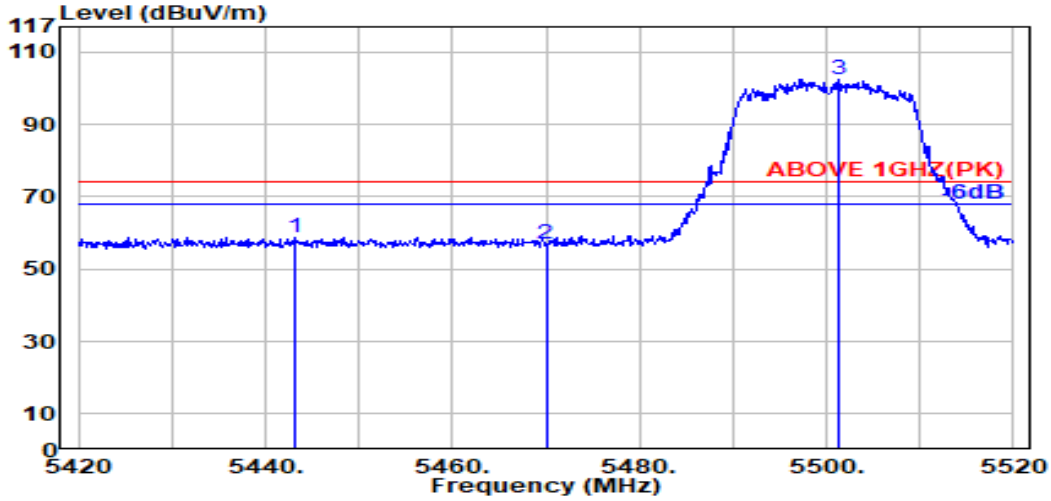

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.200	33.99	8.66	39.25	55.54	58.93	74.00	15.07	Peak
5470.000	34.04	8.69	39.25	53.39	56.87	74.00	17.13	Peak
@ 5501.400	34.10	8.72	39.25	98.94	102.50	---	---	Peak

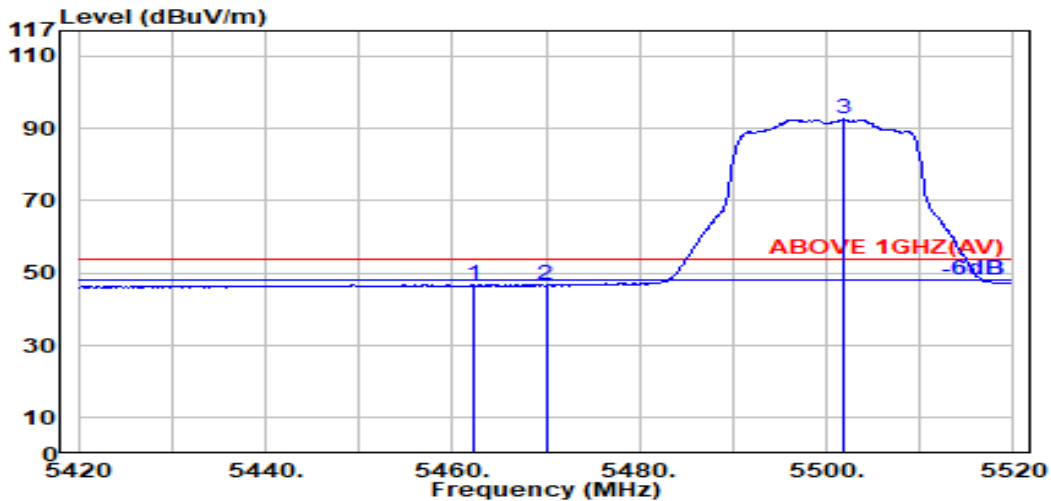


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.02	8.68	39.25	43.33	46.79	54.00	7.21	Average
5470.000	34.04	8.69	39.25	43.16	46.63	54.00	7.37	Average
@ 5501.900	34.10	8.72	39.25	88.96	92.53	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

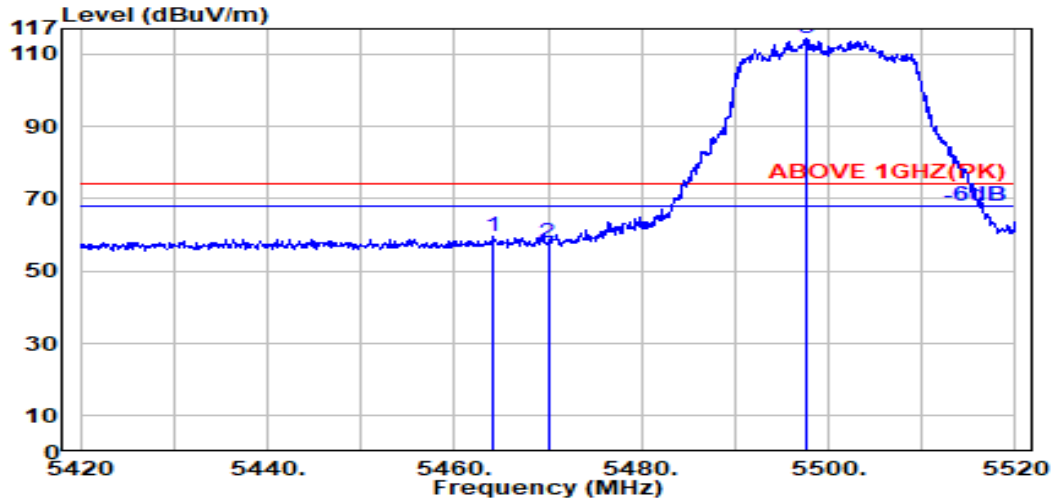

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.03	8.68	39.25	56.18	59.64	74.00	14.36	Peak
5470.000	34.04	8.69	39.25	54.16	57.64	74.00	16.36	Peak
@ 5497.700	34.10	8.71	39.25	110.66	114.22	---	---	Peak

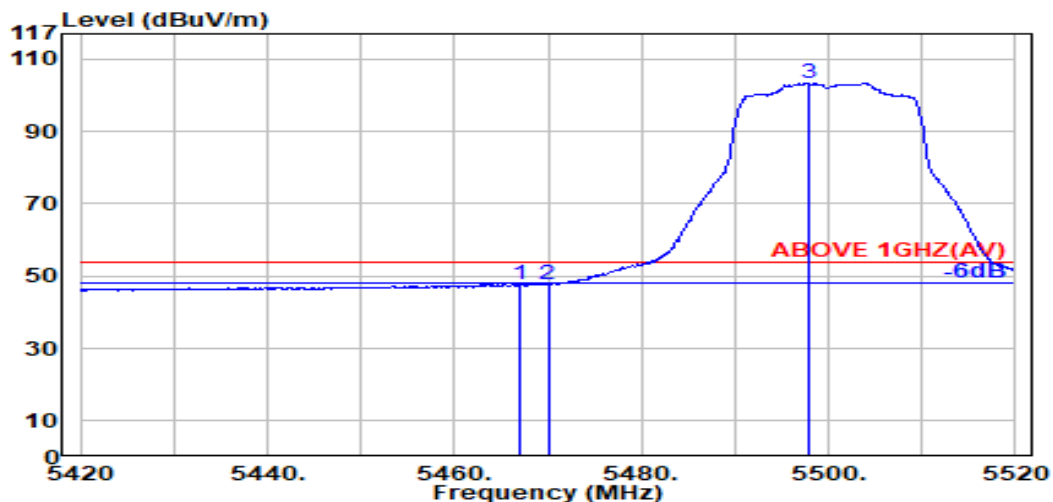


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.25	44.33	47.80	54.00	6.20	Average
5470.000	34.04	8.69	39.25	44.34	47.81	54.00	6.19	Average
@ 5497.800	34.10	8.71	39.25	99.89	103.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

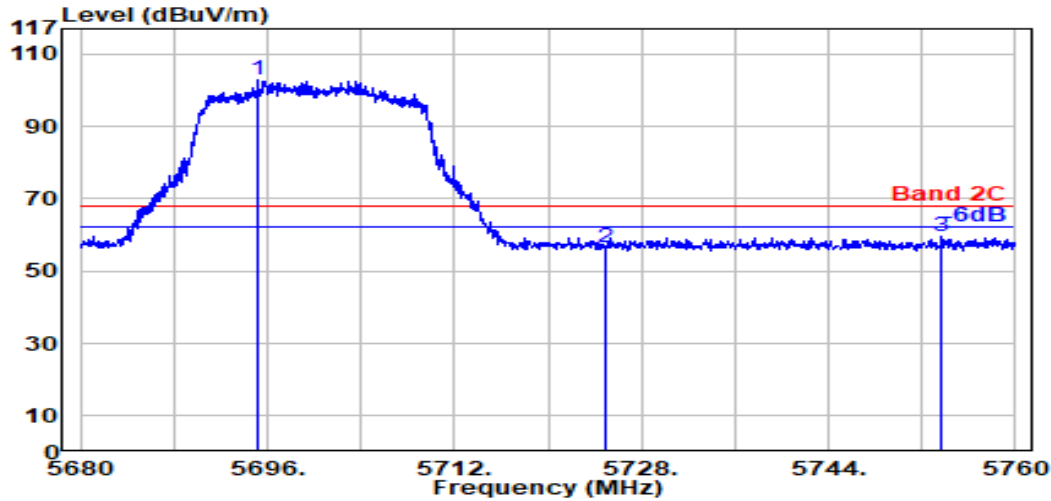

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.200	33.62	8.90	39.29	99.56	102.79	---	---	Peak
5725.000	33.60	8.93	39.29	53.18	56.42	68.20	11.78	Peak
5753.650	33.61	8.95	39.30	56.26	59.53	68.20	8.67	Peak

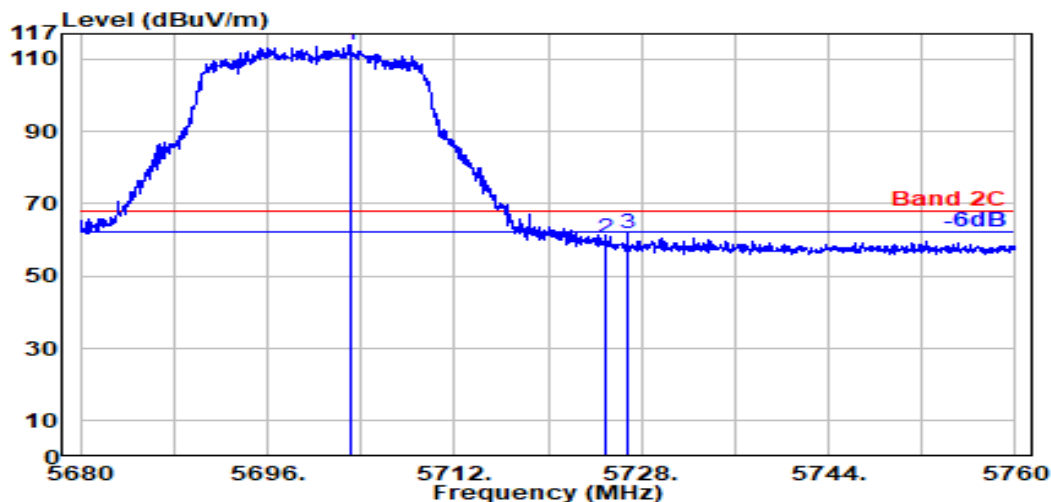


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.050	33.60	8.91	39.29	110.75	113.97	---	---	Peak
5725.000	33.60	8.93	39.29	57.29	60.52	68.20	7.68	Peak
5726.800	33.60	8.93	39.29	58.60	61.83	68.20	6.37	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

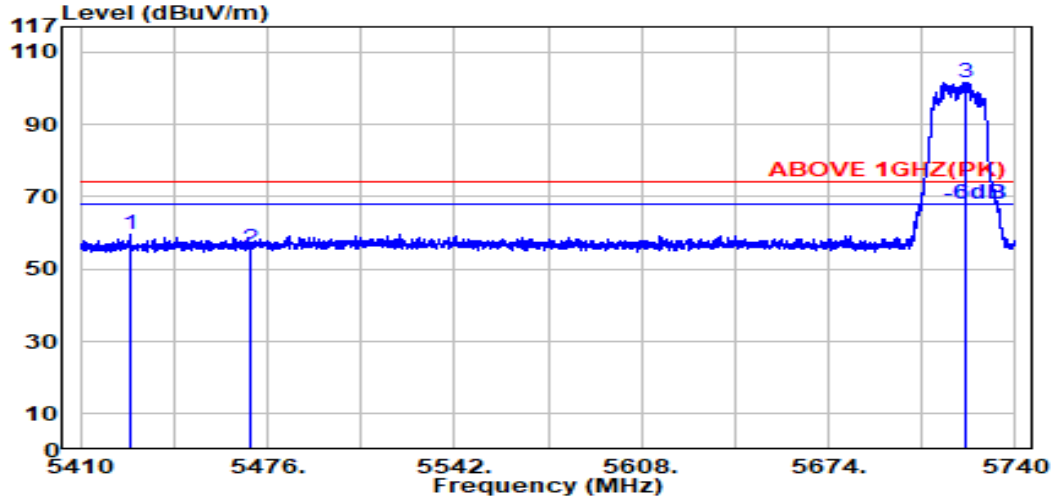

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.700	33.96	8.65	39.25	56.07	59.42	74.00	14.58	Peak
5470.000	34.04	8.69	39.25	51.94	55.42	74.00	18.58	Peak
@ 5722.800	33.60	8.92	39.29	98.28	101.51	---	---	Peak

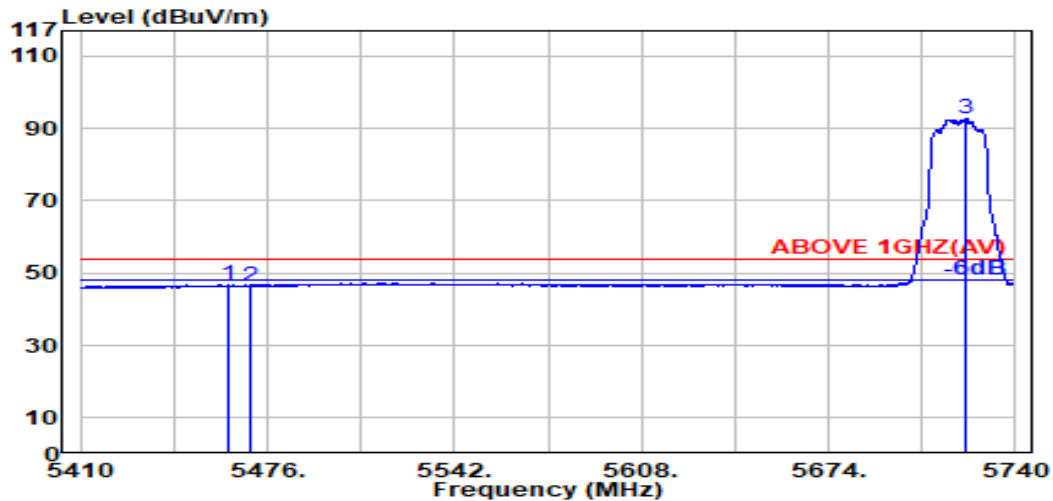


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.02	8.68	39.25	43.28	46.73	54.00	7.27	Average
5470.000	34.04	8.69	39.25	43.05	46.52	54.00	7.48	Average
@ 5722.800	33.60	8.92	39.29	89.42	92.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

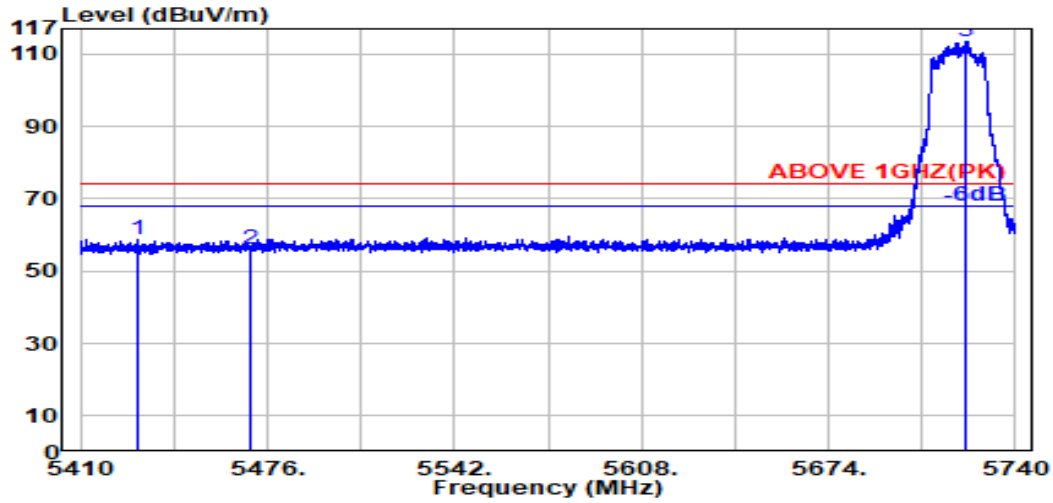

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.900	33.96	8.65	39.25	55.34	58.69	74.00	15.31	Peak
5470.000	34.04	8.69	39.25	52.63	56.11	74.00	17.89	Peak
@ 5722.200	33.60	8.92	39.29	110.20	113.43	---	---	Peak

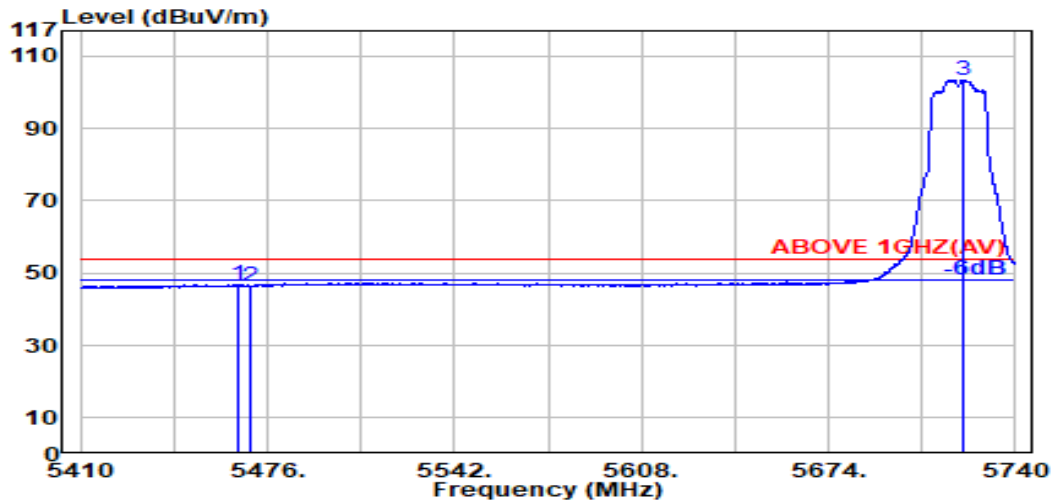


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.25	43.39	46.85	54.00	7.15	Average
5470.000	34.04	8.69	39.25	43.04	46.52	54.00	7.48	Average
@ 5721.900	33.60	8.92	39.29	100.21	103.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

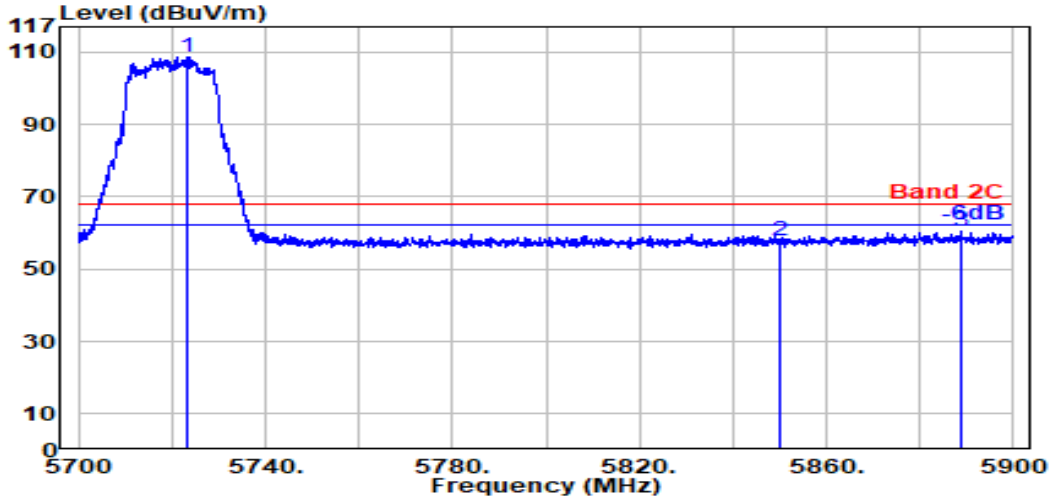

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.300	33.60	8.92	39.29	105.53	108.76	---	---	Peak
5850.000	33.90	9.04	39.31	54.19	57.82	68.20	10.38	Peak
5888.800	34.06	9.07	39.32	56.54	60.34	68.20	7.86	Peak

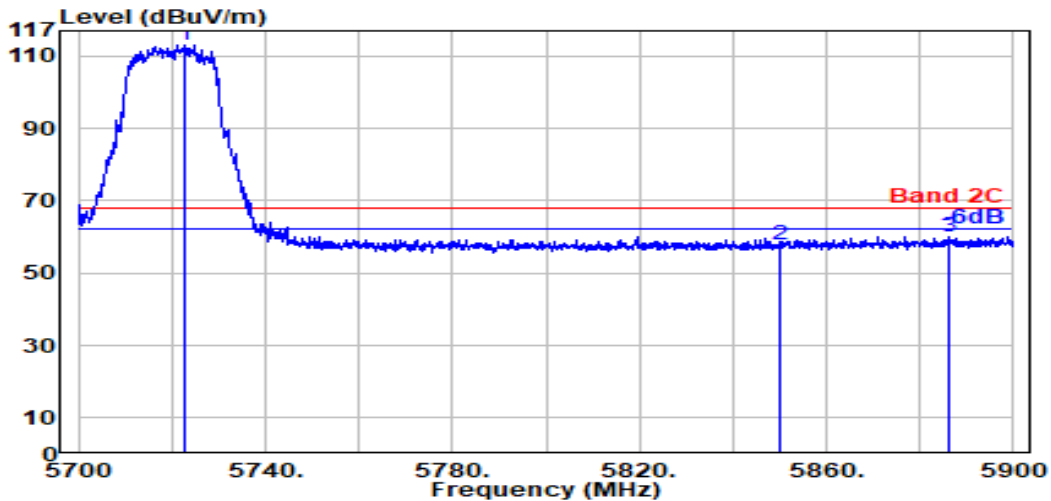

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.60	8.92	39.29	109.82	113.06	---	---	Peak
5850.000	33.90	9.04	39.31	54.03	57.65	68.20	10.55	Peak
5886.400	34.05	9.07	39.32	56.33	60.13	68.20	8.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

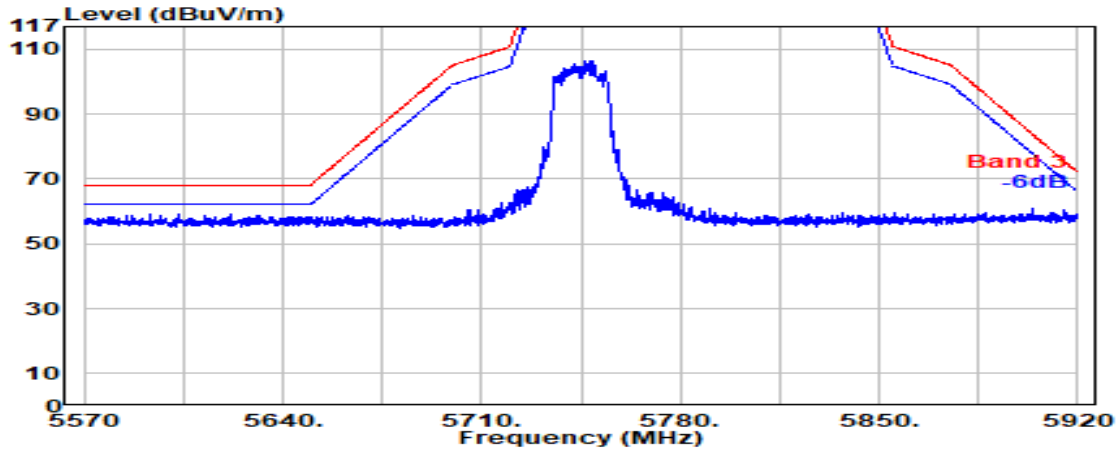


Antenna at Vertical Polarization

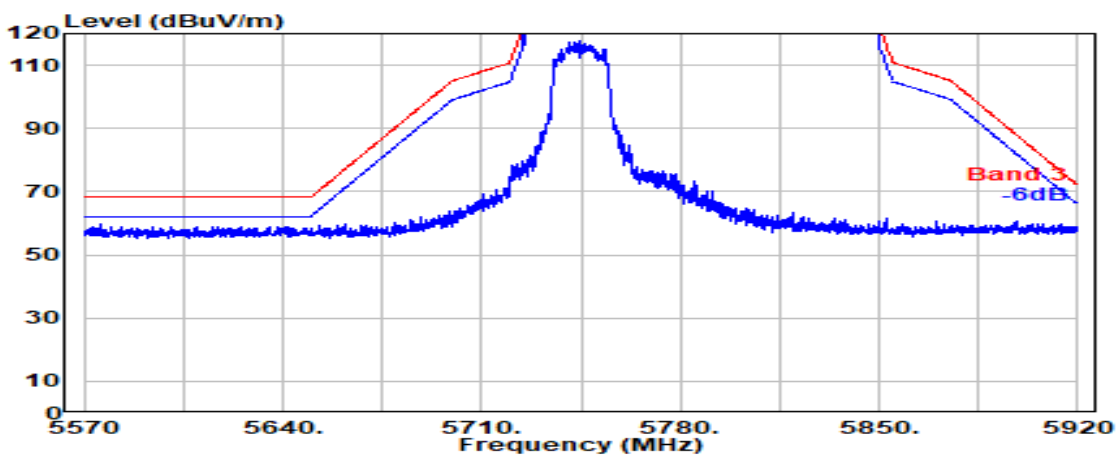


Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

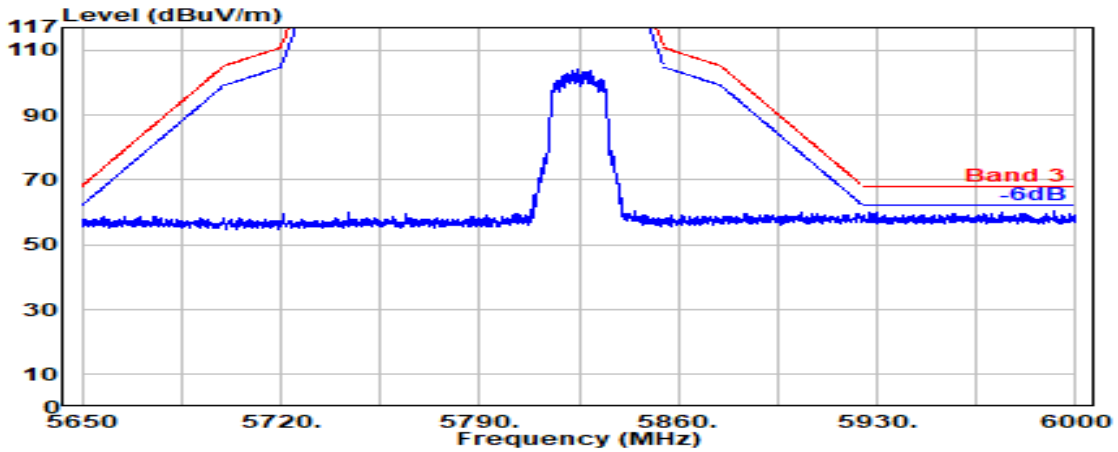

Antenna at Vertical Polarization

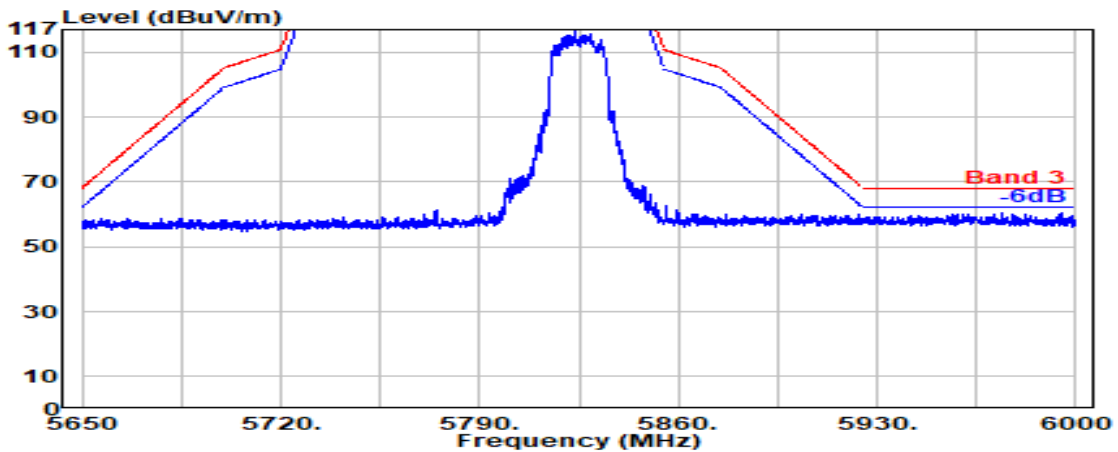


Mode	802.11be-EHT20	U-NII Band	4
		Frequency	TX 5885MHz

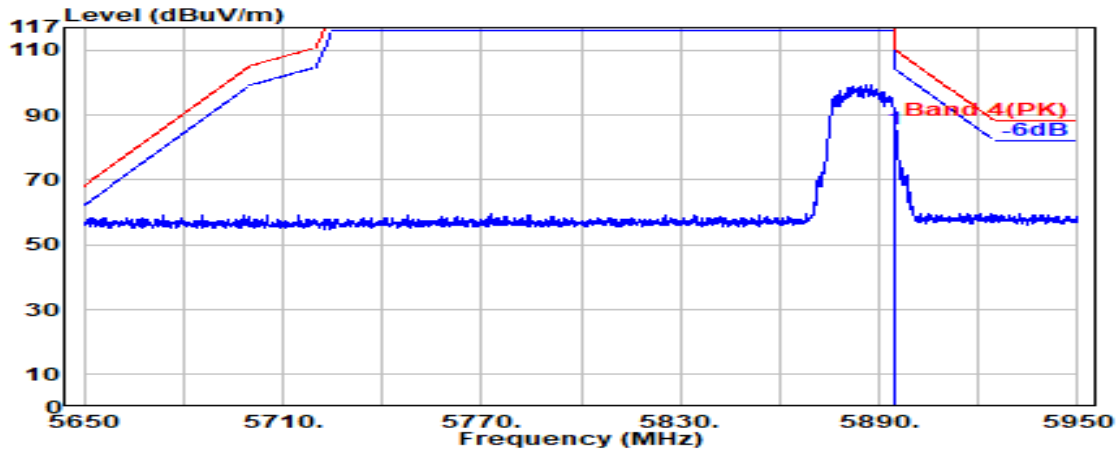

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	81.78	85.62	110.20	24.58	Peak

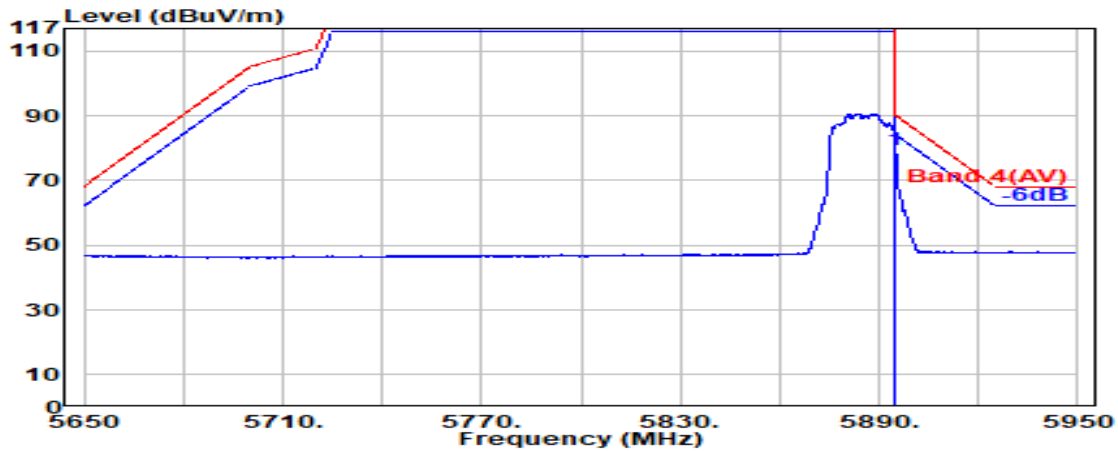


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	75.42	79.25	90.20	10.95	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT20	U-NII Band	4
		Frequency	TX 5885MHz

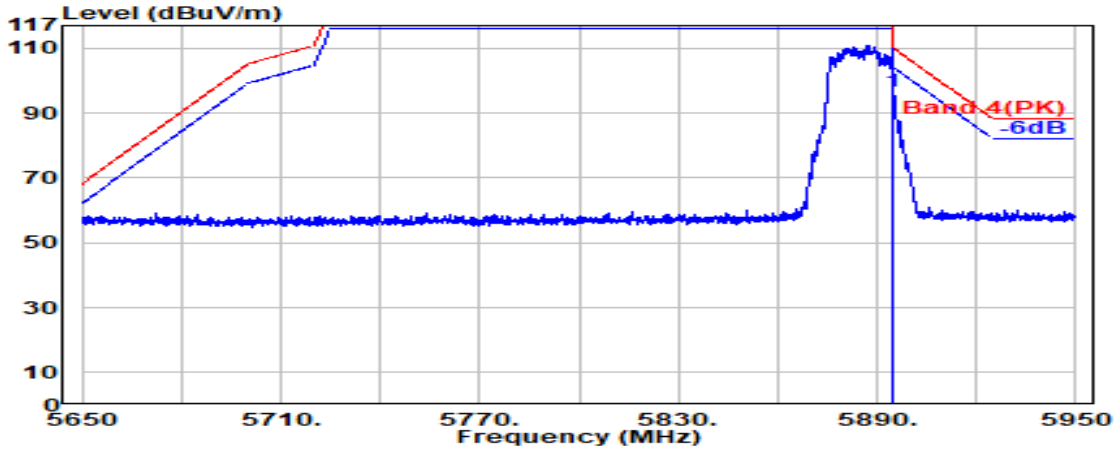

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	92.99	96.83	110.20	13.37	Peak

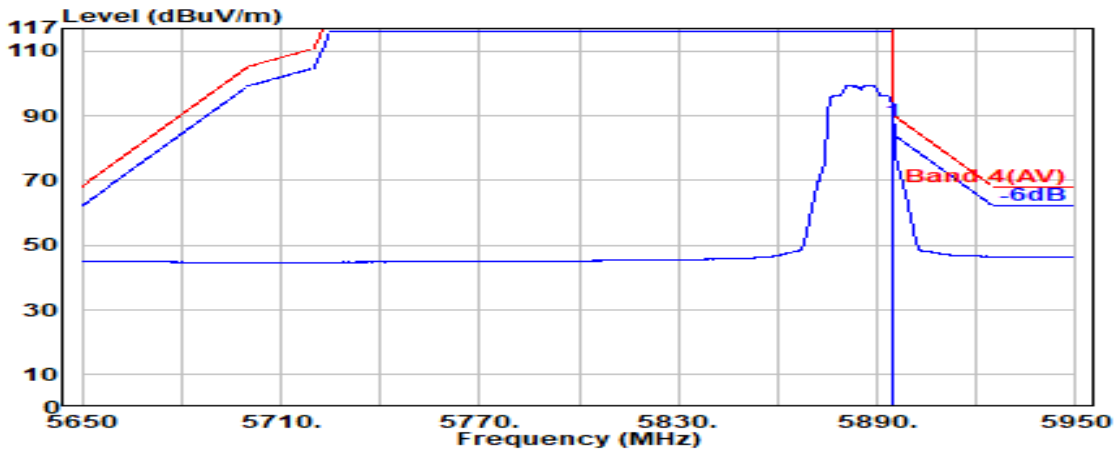


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	84.57	88.40	90.20	1.80	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

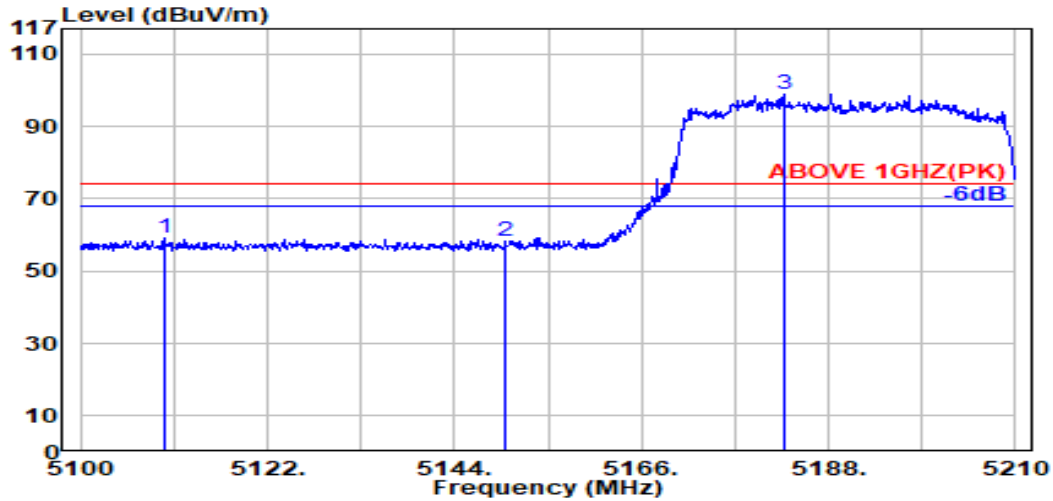

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.800	33.42	8.33	39.27	56.55	59.03	74.00	14.97	Peak
5150.000	33.50	8.37	39.27	55.74	58.34	74.00	15.66	Peak
@ 5182.700	33.70	8.41	39.27	96.04	98.88	---	---	Peak

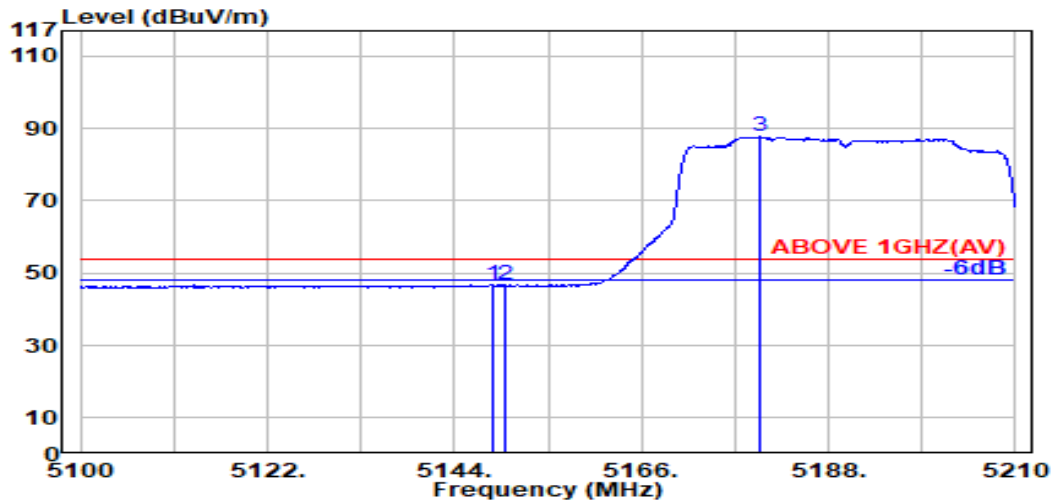


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.50	8.37	39.27	44.19	46.78	54.00	7.22	Average
5150.000	33.50	8.37	39.27	43.99	46.59	54.00	7.41	Average
@ 5180.000	33.68	8.40	39.27	84.83	87.64	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

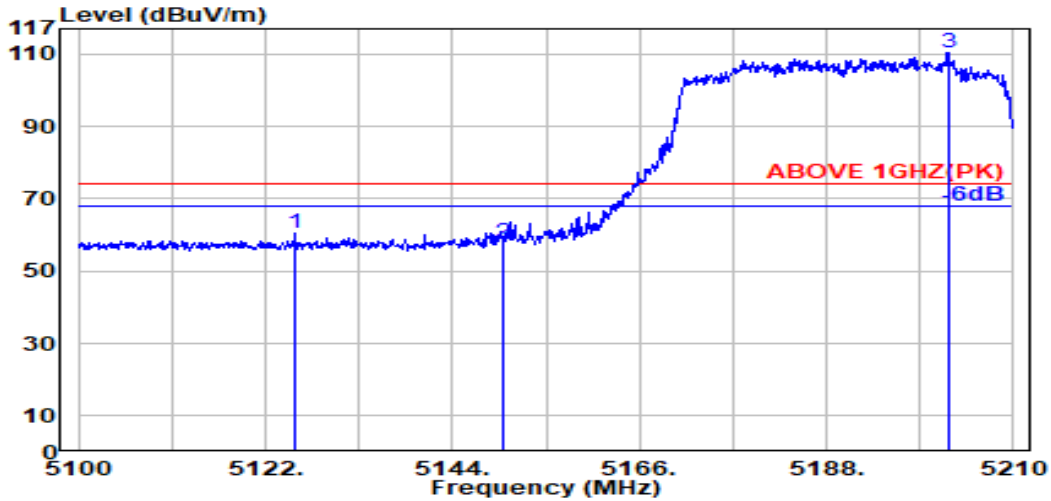

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.500	33.45	8.35	39.27	58.07	60.60	74.00	13.40	Peak
5150.000	33.50	8.37	39.27	55.12	57.73	74.00	16.27	Peak
@ 5202.300	33.80	8.43	39.27	107.50	110.45	---	---	Peak

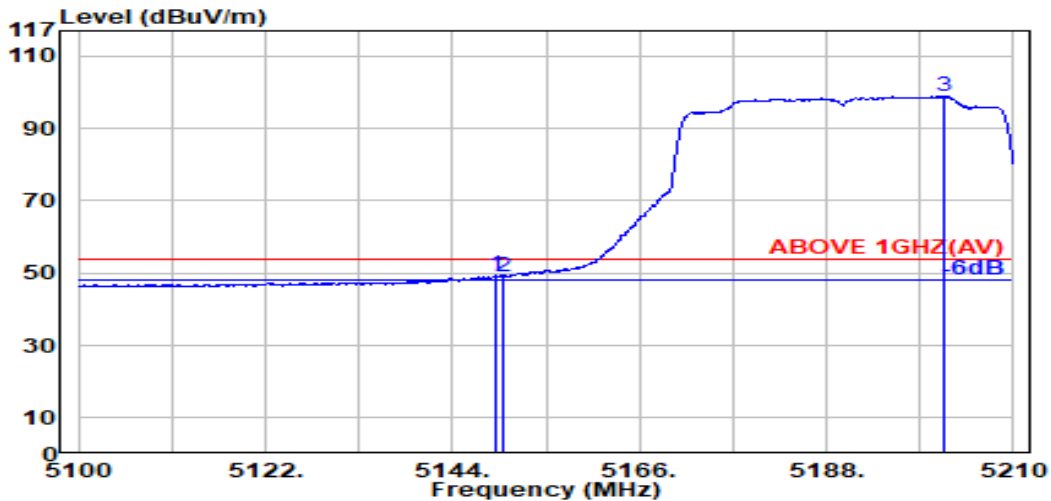


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.27	46.67	49.27	54.00	4.73	Average
5150.000	33.50	8.37	39.27	46.52	49.12	54.00	4.88	Average
@ 5201.700	33.80	8.43	39.27	95.92	98.87	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

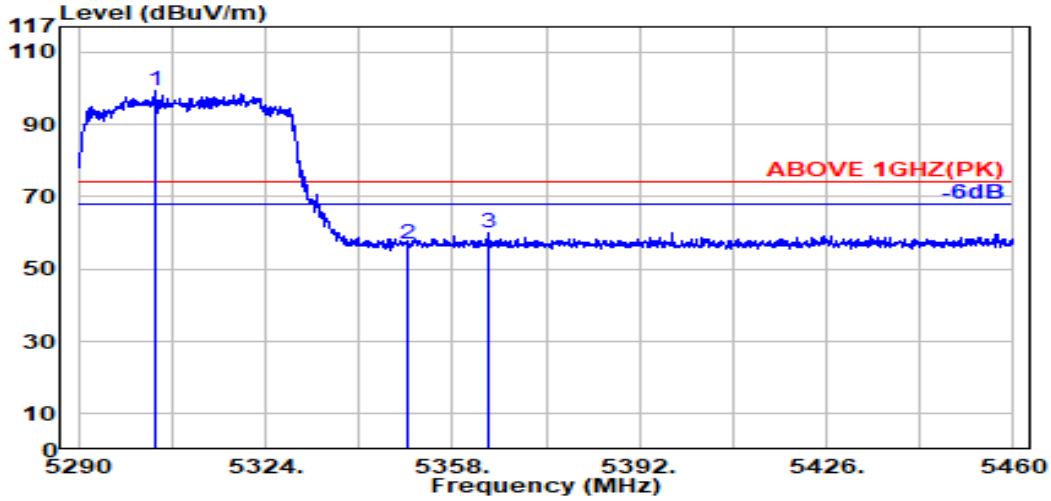

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.800	33.79	8.53	39.26	96.47	99.53	---	---	Peak
5350.000	33.70	8.57	39.26	54.04	57.05	74.00	16.95	Peak
5364.500	33.76	8.59	39.26	56.80	59.89	74.00	14.11	Peak

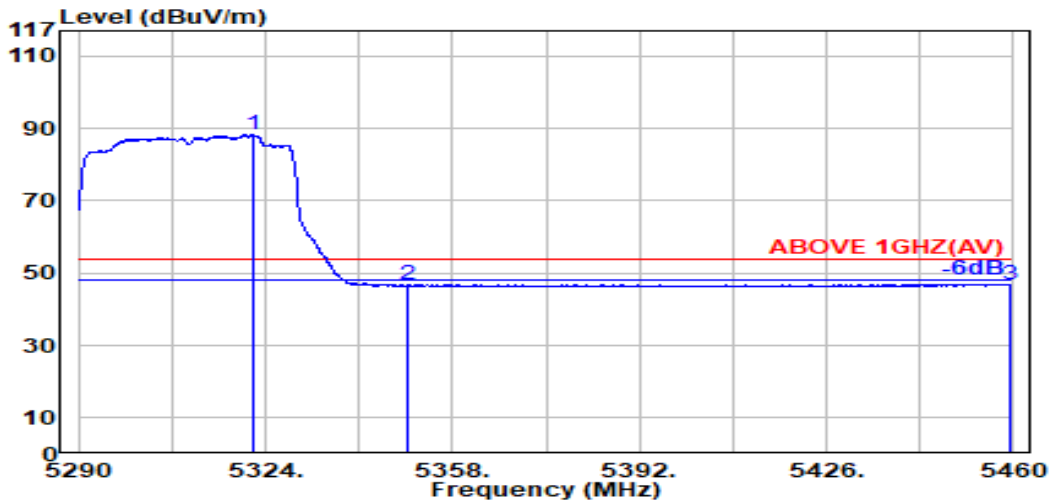


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.26	85.18	88.22	---	---	Average
5350.000	33.70	8.57	39.26	43.60	46.61	54.00	7.39	Average
5459.200	34.02	8.68	39.25	43.54	46.98	54.00	7.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

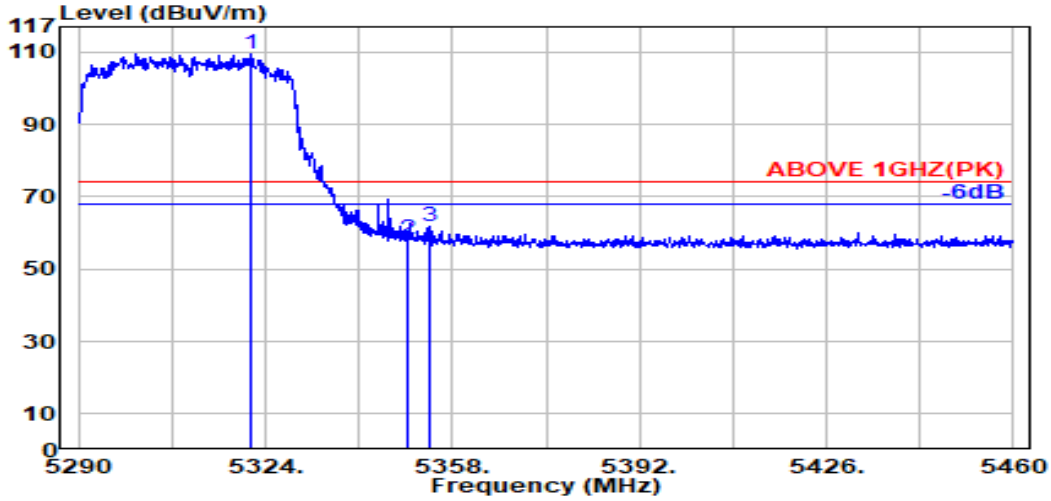

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.300	33.76	8.54	39.26	106.62	109.66	---	---	Peak
5350.000	33.70	8.57	39.26	55.20	58.22	74.00	15.78	Peak
5353.900	33.72	8.58	39.26	58.75	61.78	74.00	12.22	Peak

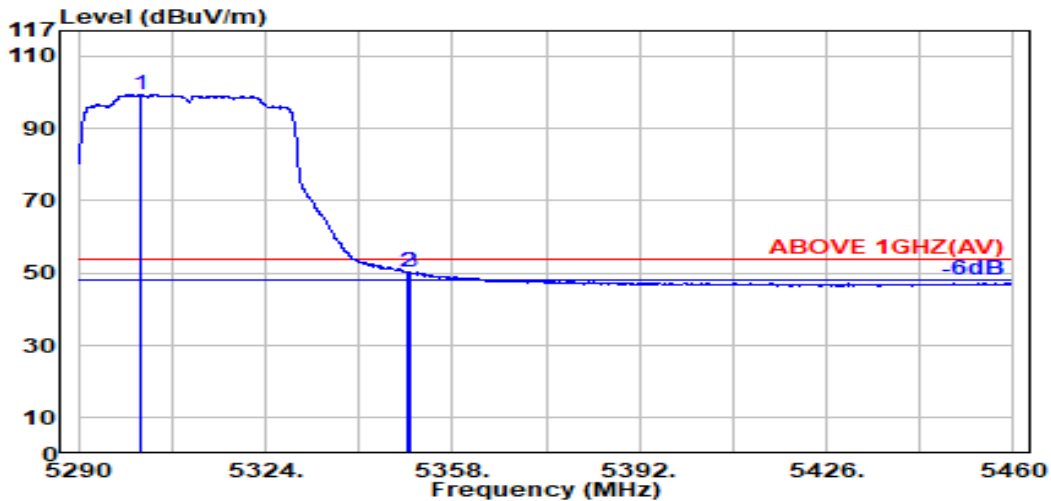


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.100	33.80	8.52	39.26	96.37	99.43	---	---	Average
5350.000	33.70	8.57	39.26	47.43	50.45	54.00	3.55	Average
5350.400	33.70	8.57	39.26	47.27	50.29	54.00	3.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

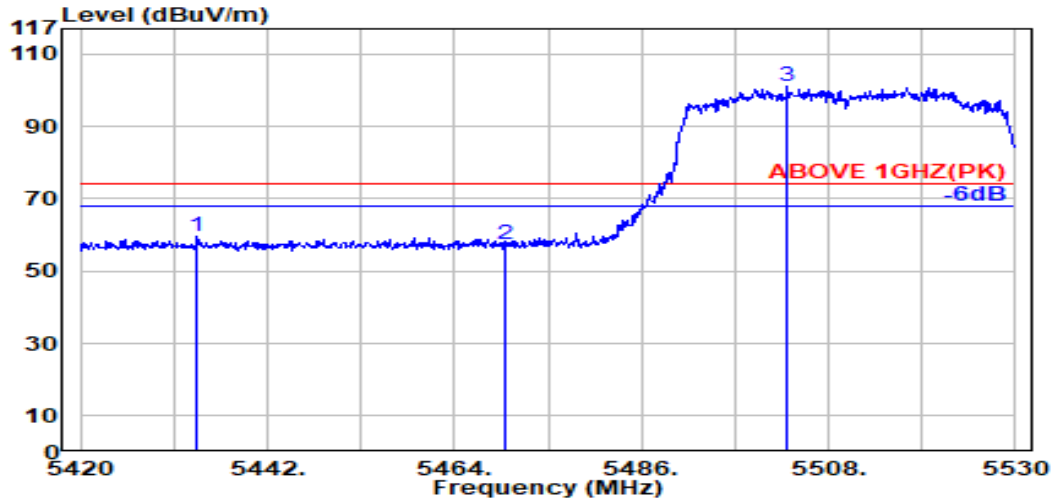

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.700	33.97	8.65	39.25	56.12	59.49	74.00	14.51	Peak
5470.000	34.04	8.69	39.25	54.06	57.53	74.00	16.47	Peak
@ 5503.100	34.09	8.72	39.25	97.60	101.16	---	---	Peak

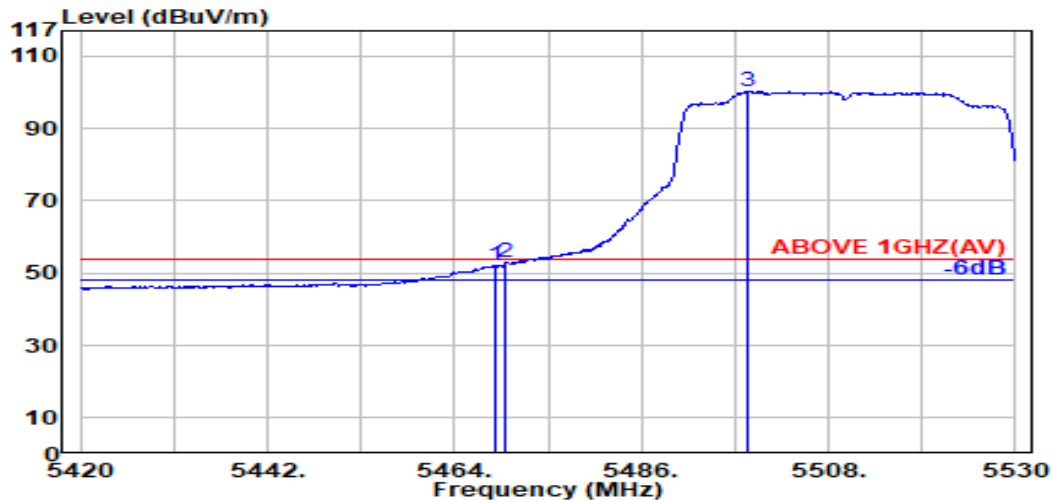


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	48.42	51.90	54.00	2.10	Average
5470.000	34.04	8.69	39.25	49.29	52.76	54.00	1.24	Average
@ 5498.600	34.10	8.72	39.25	96.76	100.32	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

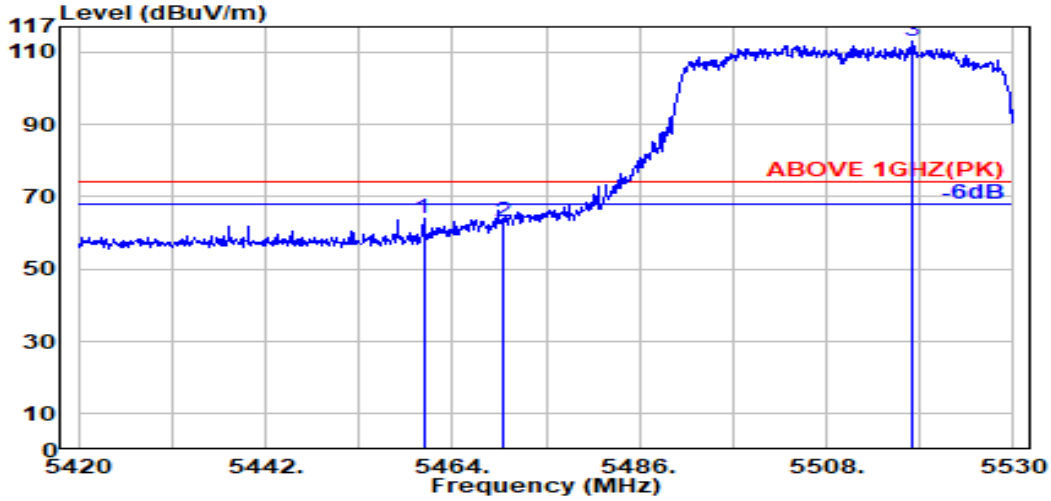

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.600	34.02	8.68	39.25	60.41	63.86	74.00	10.14	Peak
5470.000	34.04	8.69	39.25	59.54	63.01	74.00	10.99	Peak
@ 5518.200	34.06	8.73	39.25	109.41	112.96	---	---	Peak

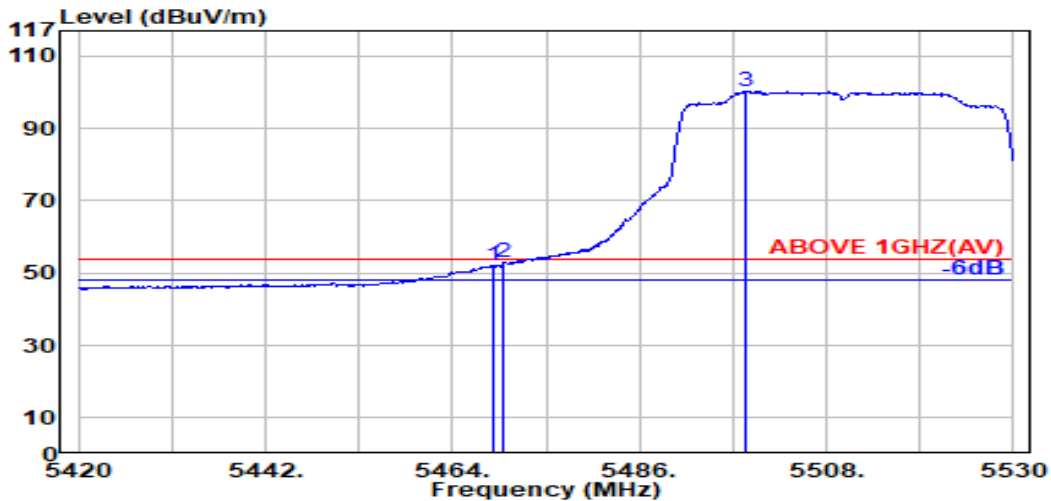


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	48.42	51.90	54.00	2.10	Average
5470.000	34.04	8.69	39.25	49.29	52.76	54.00	1.24	Average
@ 5498.600	34.10	8.72	39.25	96.76	100.32	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

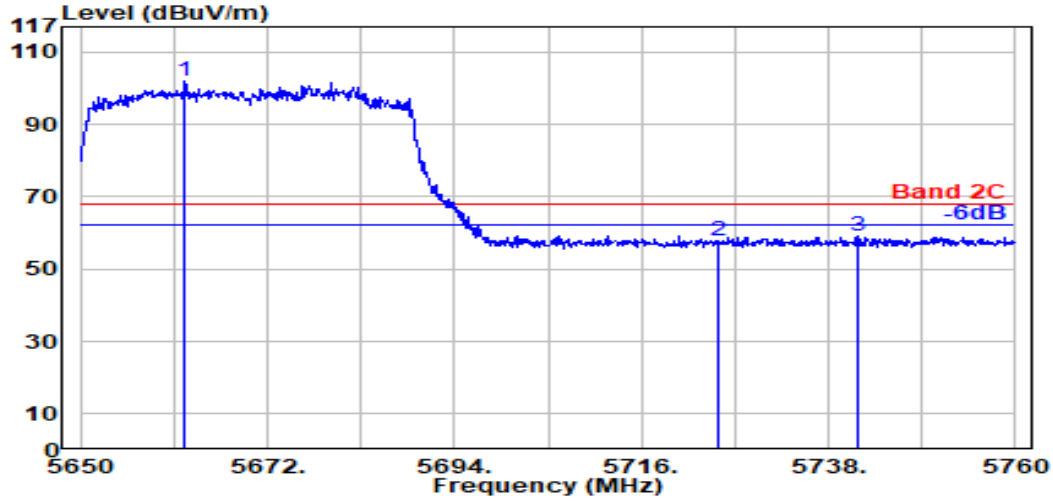

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.300	33.75	8.87	39.28	98.58	101.92	---	---	Peak
5725.000	33.60	8.93	39.29	54.58	57.82	68.20	10.38	Peak
5741.400	33.60	8.94	39.29	55.72	58.97	68.20	9.23	Peak

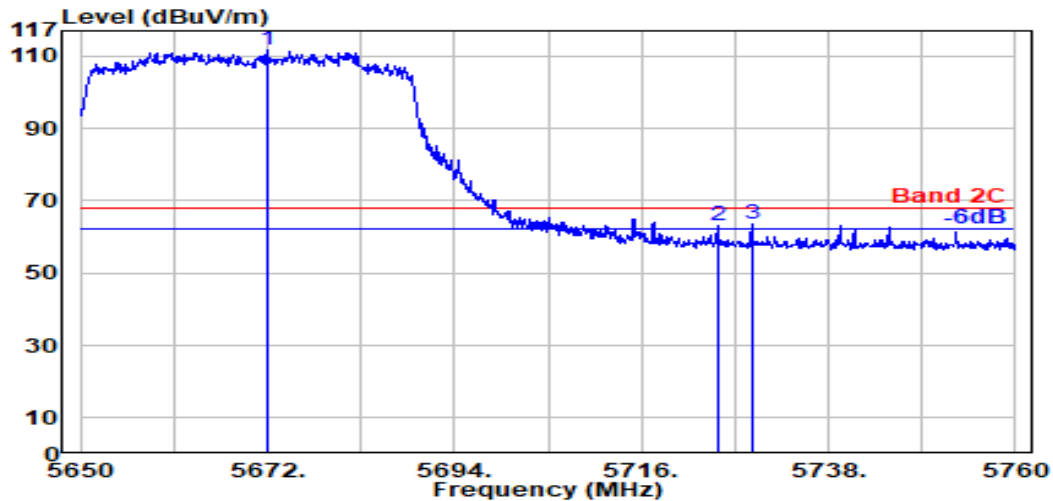


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.900	33.71	8.88	39.28	108.22	111.53	---	---	Peak
5725.000	33.60	8.93	39.29	60.05	63.29	68.20	4.91	Peak
5729.000	33.60	8.93	39.29	60.45	63.68	68.20	4.52	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

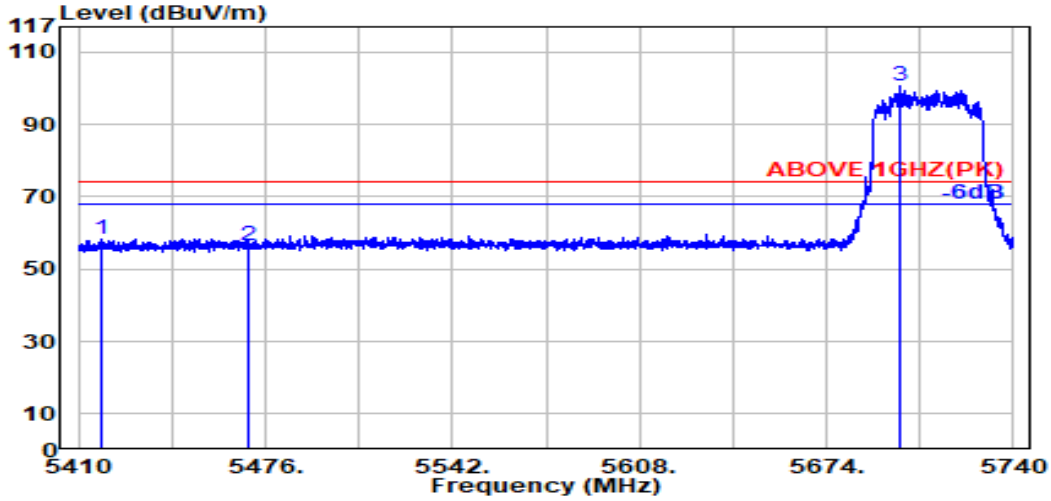

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.200	33.94	8.64	39.25	55.05	58.37	74.00	15.63	Peak
5470.000	34.04	8.69	39.25	53.24	56.72	74.00	17.28	Peak
@ 5700.000	33.60	8.90	39.29	97.34	100.56	---	---	Peak

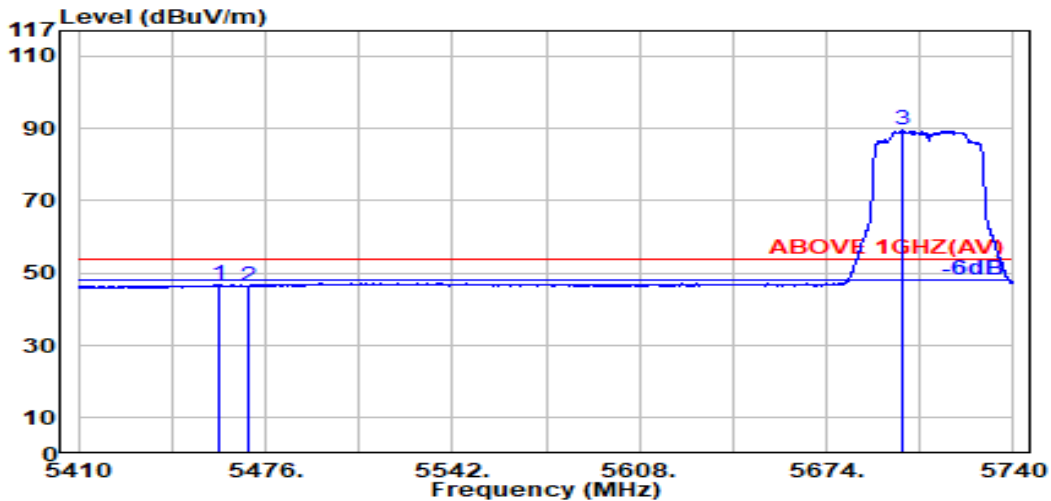


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.02	8.68	39.25	43.24	46.69	54.00	7.31	Average
5470.000	34.04	8.69	39.25	42.92	46.39	54.00	7.61	Average
@ 5700.600	33.60	8.90	39.29	86.25	89.47	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

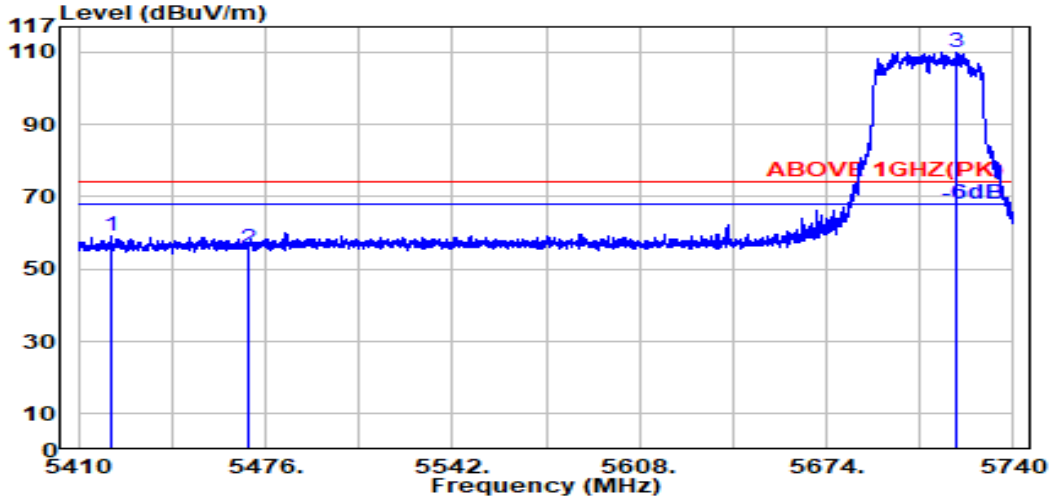

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.500	33.94	8.64	39.25	55.87	59.20	74.00	14.80	Peak
5470.000	34.04	8.69	39.25	52.21	55.69	74.00	18.31	Peak
@ 5720.200	33.60	8.92	39.29	106.88	110.11	---	---	Peak

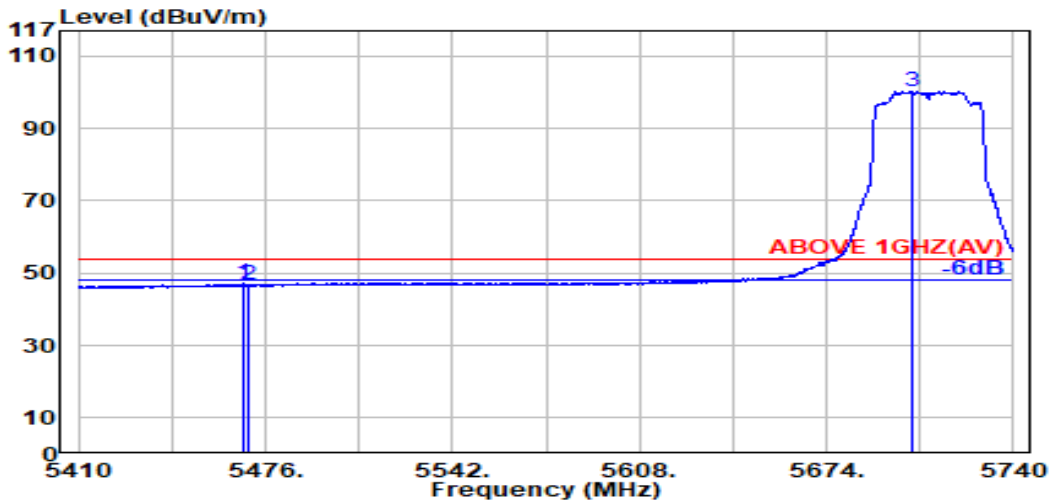


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.25	43.56	47.03	54.00	6.97	Average
5470.000	34.04	8.69	39.25	43.16	46.63	54.00	7.37	Average
@ 5703.900	33.60	8.91	39.29	96.97	100.19	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

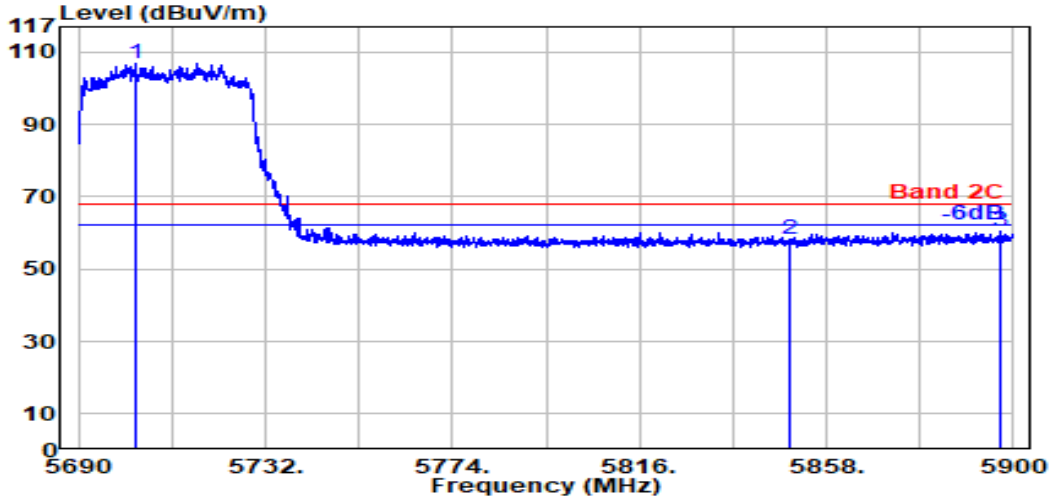

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.700	33.60	8.91	39.29	103.81	107.03	---	---	Peak
5850.000	33.90	9.04	39.31	54.64	58.26	68.20	9.94	Peak
5897.300	34.09	9.08	39.32	56.50	60.34	68.20	7.86	Peak

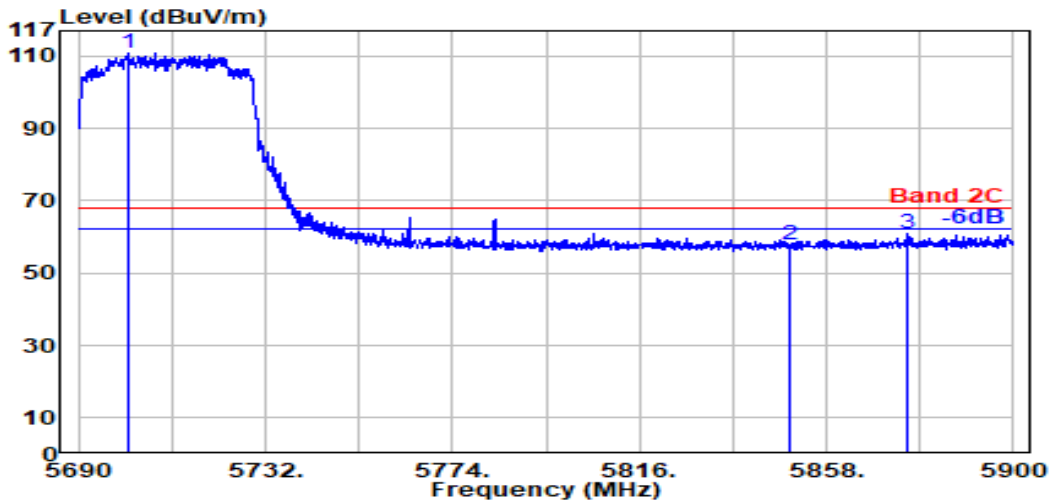


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.100	33.60	8.90	39.29	107.81	111.02	---	---	Peak
5850.000	33.90	9.04	39.31	54.02	57.64	68.20	10.56	Peak
5876.400	34.01	9.06	39.32	57.01	60.76	68.20	7.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

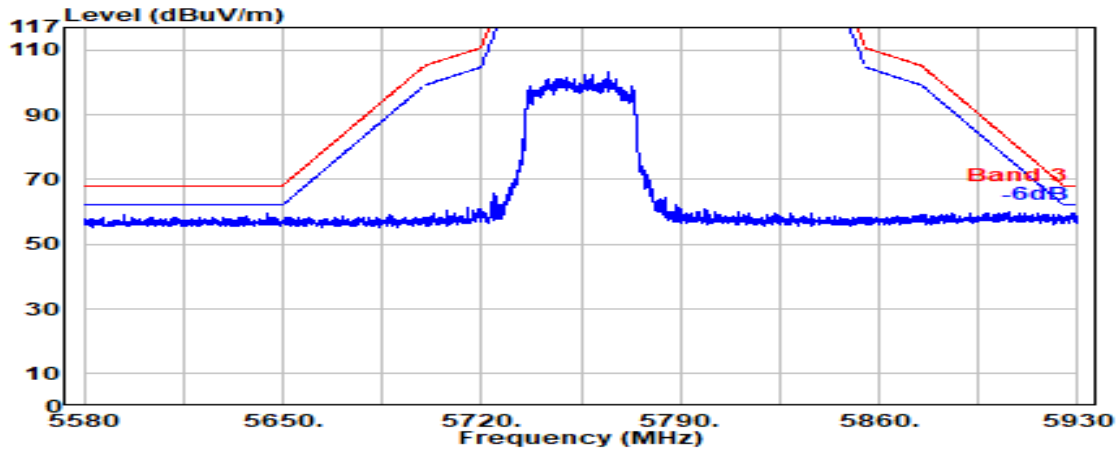


Antenna at Vertical Polarization

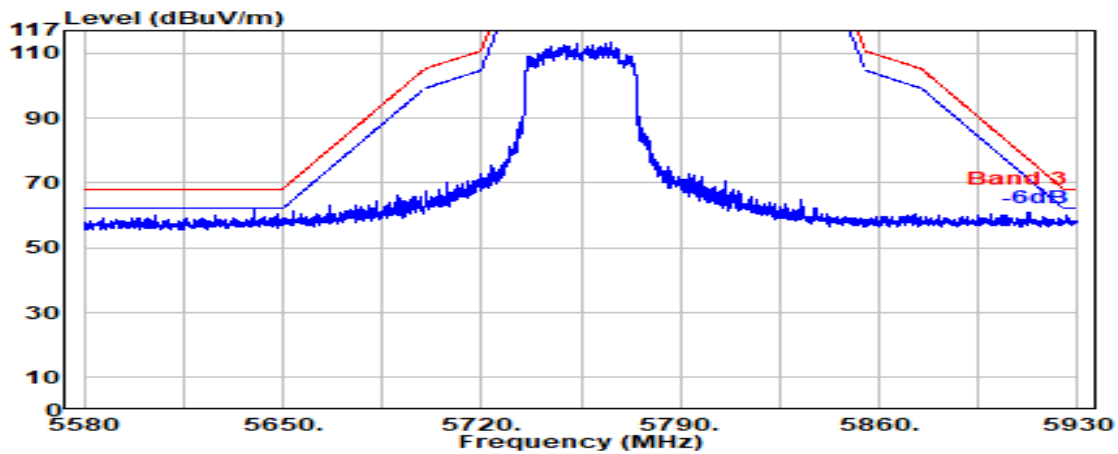


Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

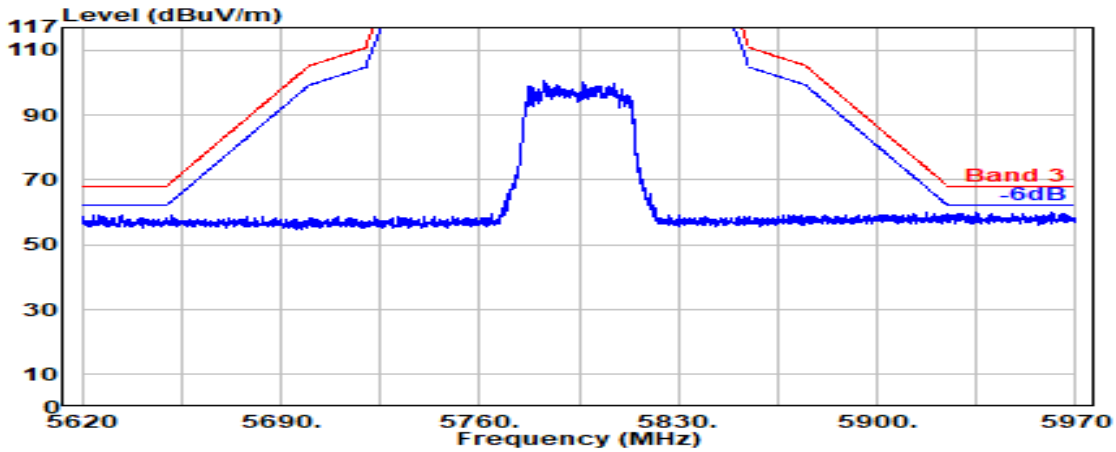

Antenna at Vertical Polarization

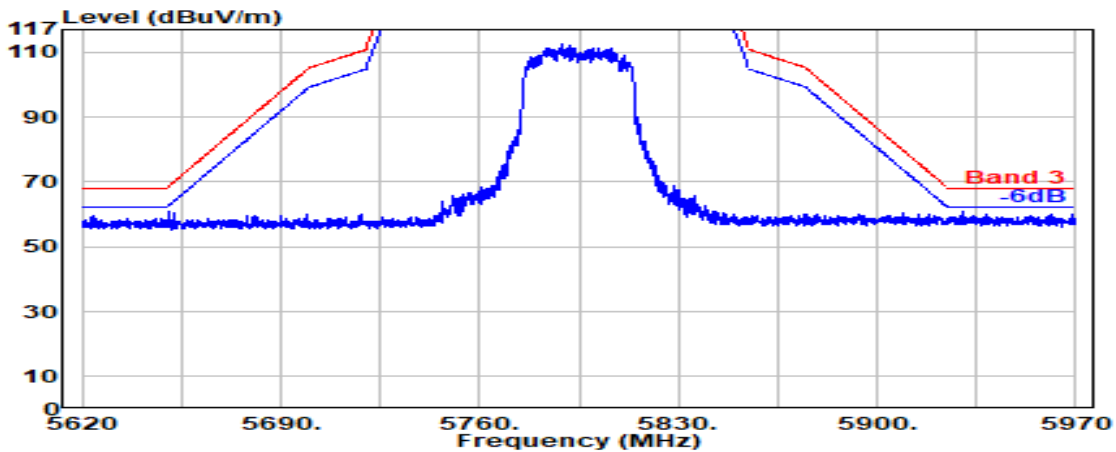


Mode	802.11be-EHT40	U-NII Band	4
		Frequency	TX 5875MHz

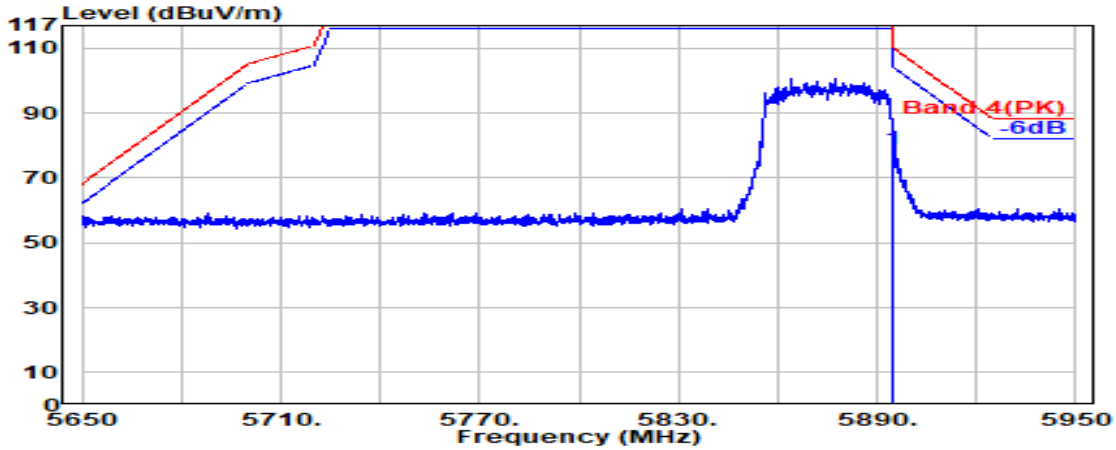

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	75.19	79.03	110.20	31.17	Peak

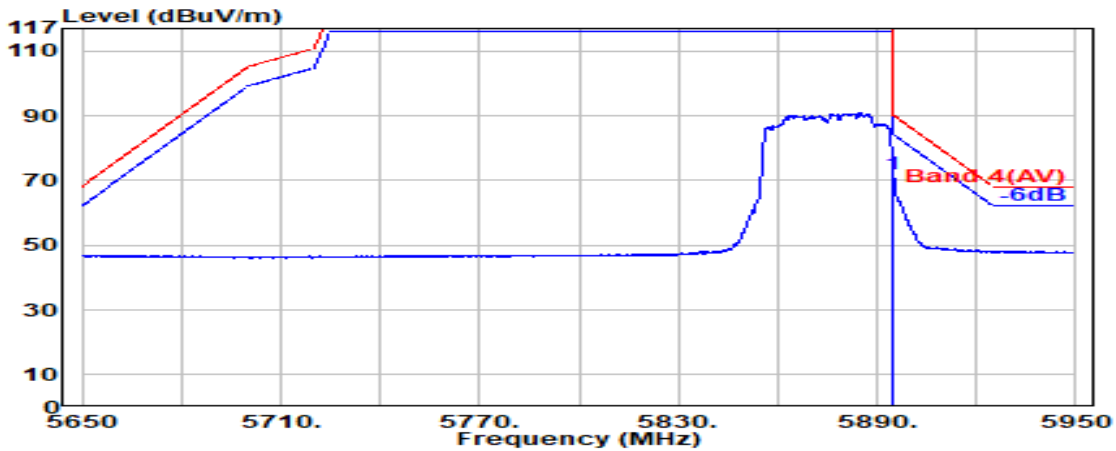


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	68.18	72.01	90.20	18.19	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT40	U-NII Band	4
		Frequency	TX 5875MHz

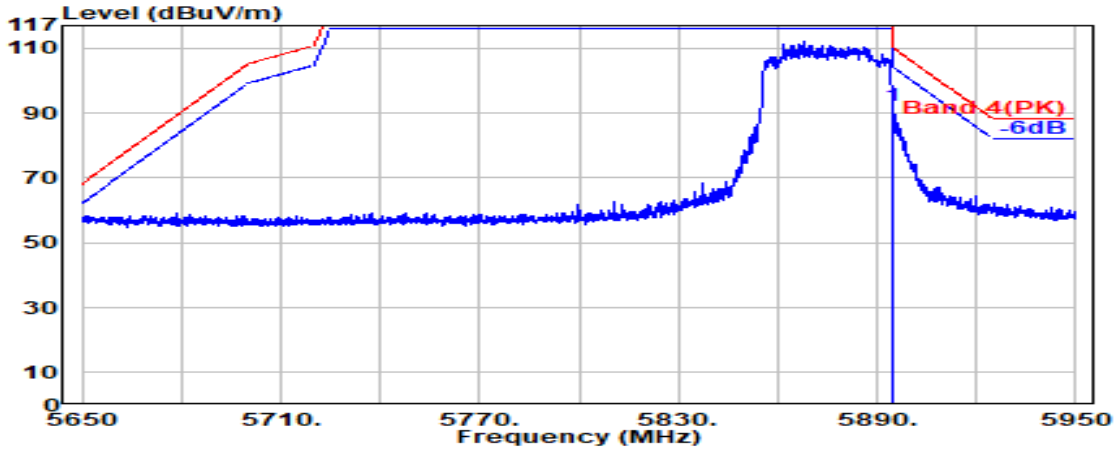

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	88.27	92.11	110.20	18.09	Peak

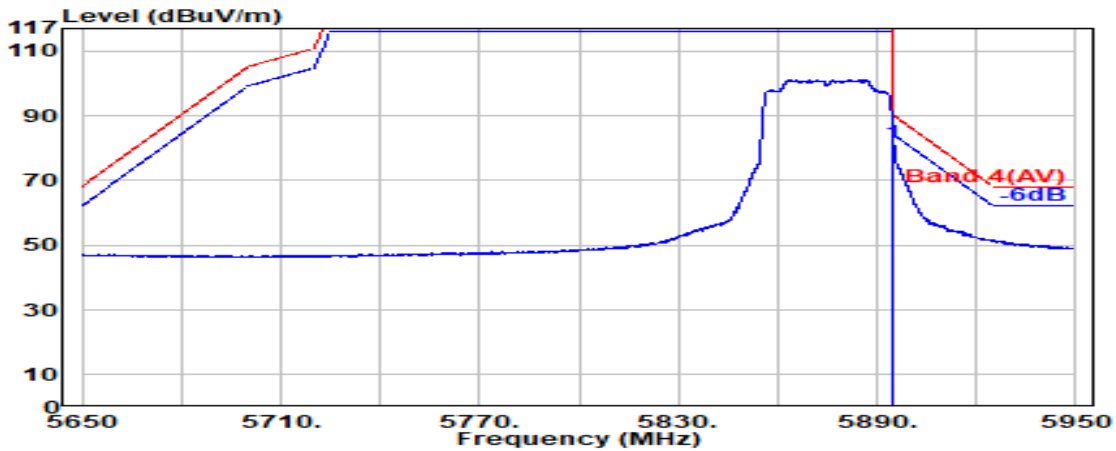


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.32	77.87	81.71	90.20	8.49	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

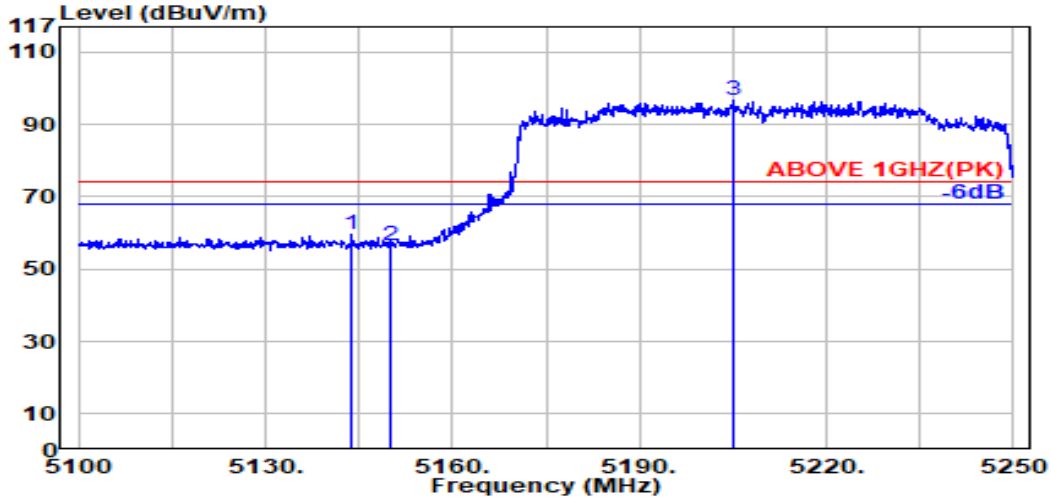

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	33.49	8.37	39.27	57.14	59.73	74.00	14.27	Peak
5150.000	33.50	8.37	39.27	53.78	56.39	74.00	17.61	Peak
@ 5205.200	33.79	8.43	39.27	93.62	96.58	---	---	Peak

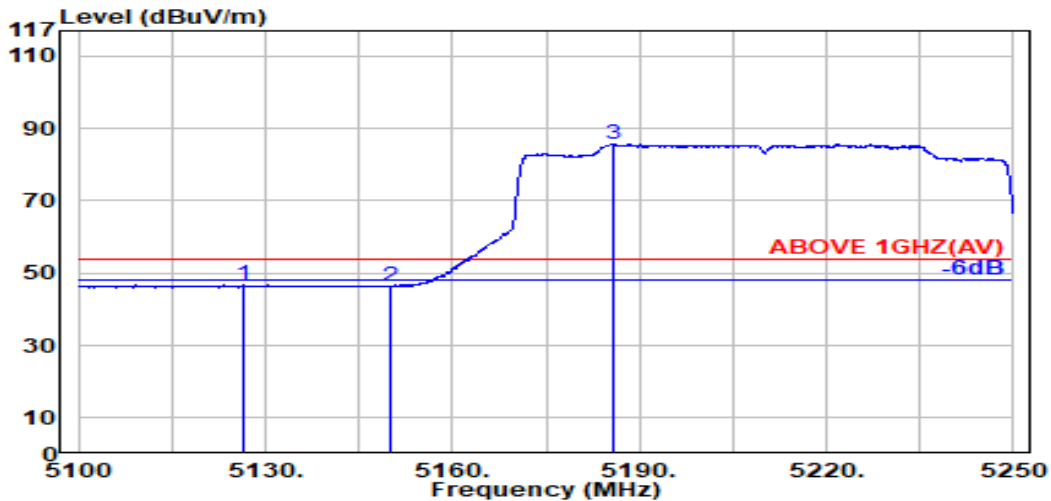


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.600	33.45	8.35	39.27	44.10	46.64	54.00	7.36	Average
5150.000	33.50	8.37	39.27	43.73	46.33	54.00	7.67	Average
@ 5185.700	33.71	8.41	39.27	82.86	85.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

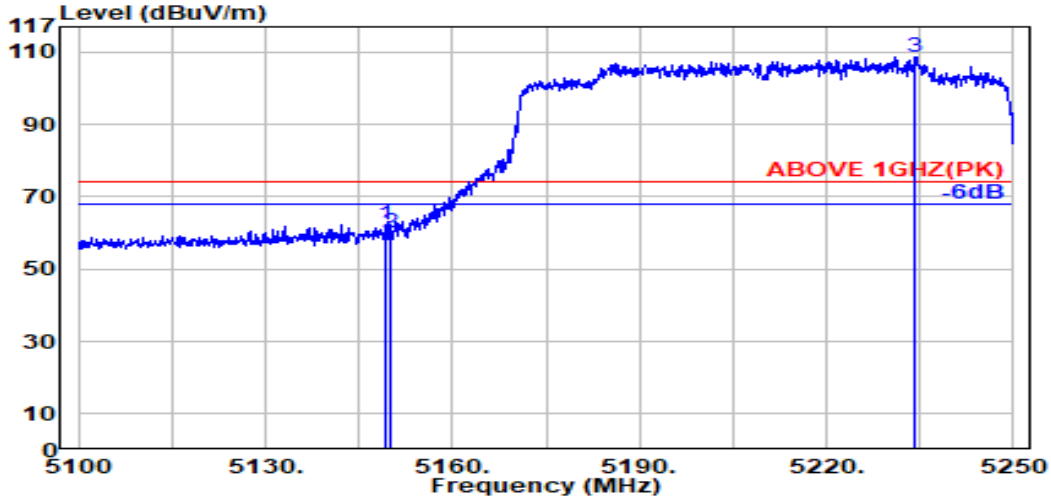

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.27	59.64	62.24	74.00	11.76	Peak
5150.000	33.50	8.37	39.27	57.53	60.13	74.00	13.87	Peak
@ 5234.200	33.73	8.46	39.27	105.73	108.65	---	---	Peak

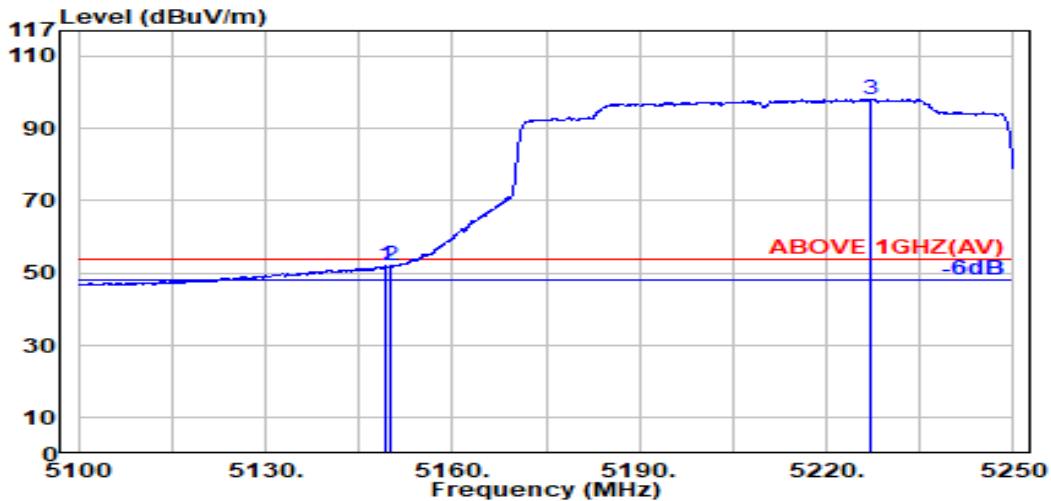


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.27	49.63	52.23	54.00	1.77	Average
5150.000	33.50	8.37	39.27	49.30	51.90	54.00	2.10	Average
@ 5227.200	33.75	8.45	39.27	95.08	98.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

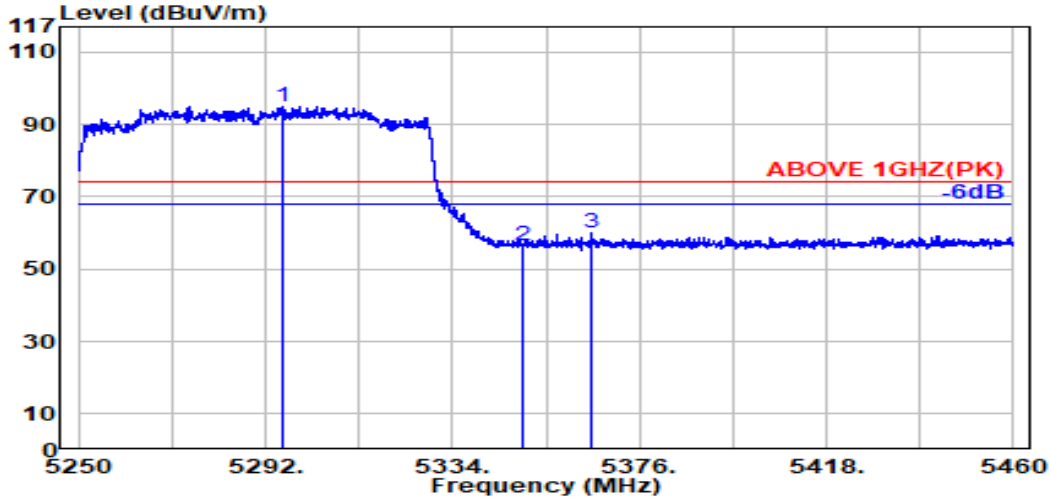

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.900	33.79	8.52	39.26	91.97	95.02	---	---	Peak
5350.000	33.70	8.57	39.26	53.44	56.45	74.00	17.55	Peak
5365.300	33.76	8.59	39.26	57.11	60.20	74.00	13.80	Peak

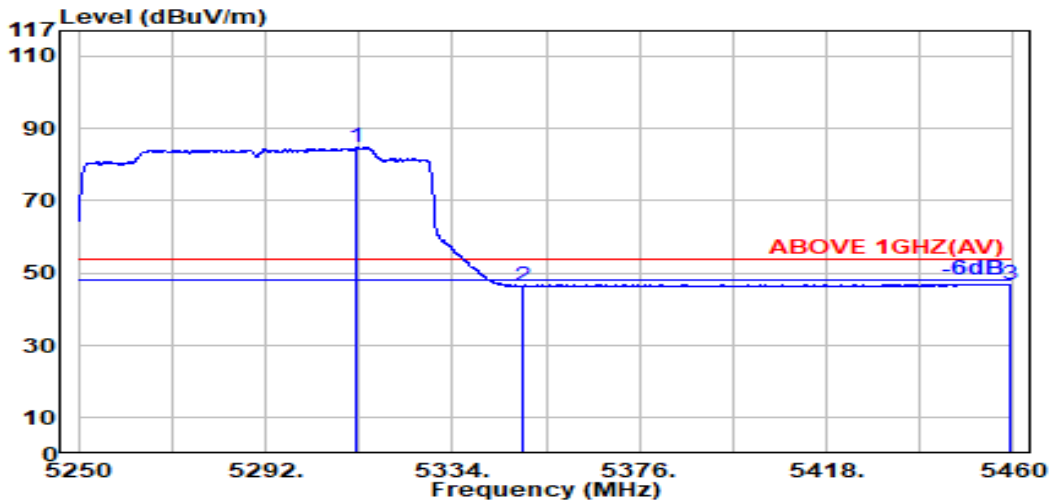


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.600	33.77	8.54	39.26	81.58	84.63	---	---	Average
5350.000	33.70	8.57	39.26	43.43	46.44	54.00	7.56	Average
5459.300	34.02	8.68	39.25	43.51	46.96	54.00	7.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

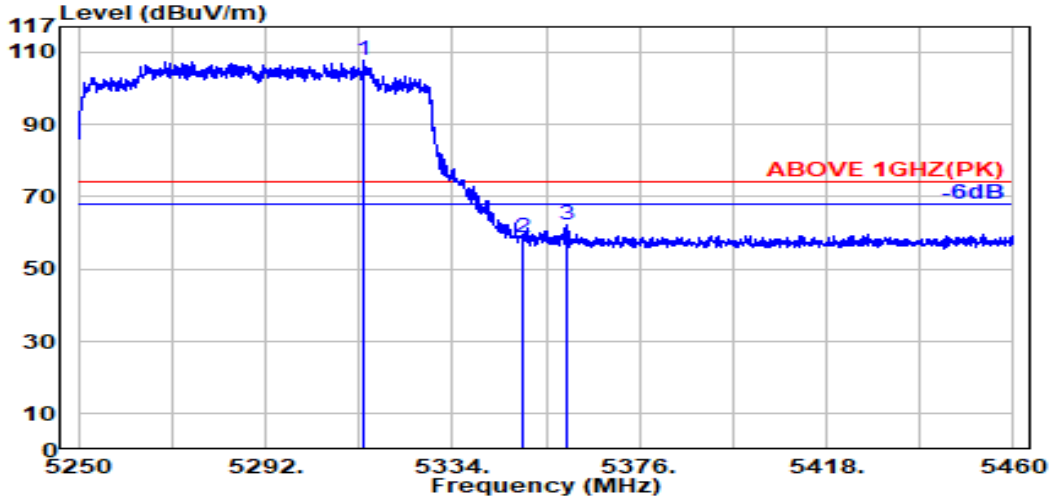

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.000	33.77	8.54	39.26	104.64	107.69	---	---	Peak
5350.000	33.70	8.57	39.26	55.89	58.91	74.00	15.09	Peak
5359.900	33.74	8.58	39.26	59.02	62.08	74.00	11.92	Peak

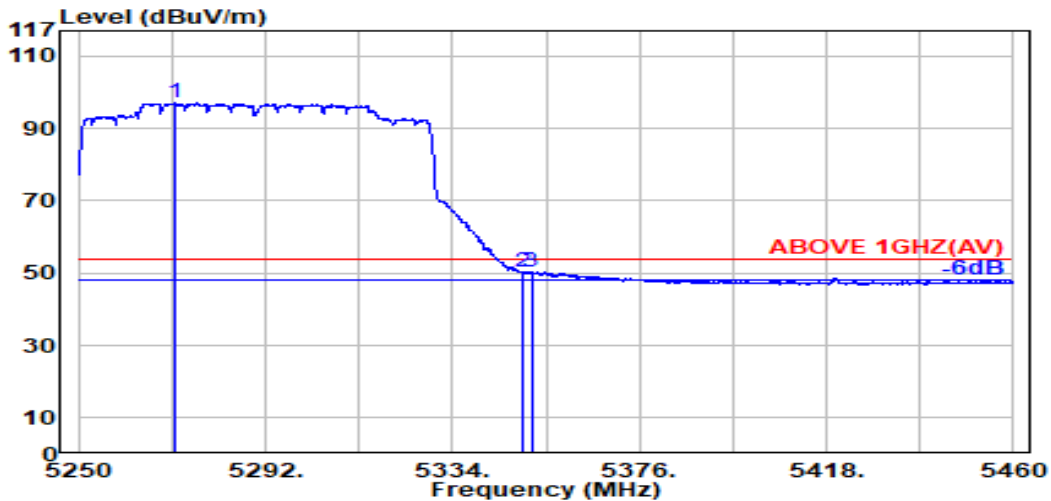


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.700	33.74	8.50	39.26	93.97	96.94	---	---	Average
5350.000	33.70	8.57	39.26	47.31	50.32	54.00	3.68	Average
5351.700	33.71	8.57	39.26	47.47	50.50	54.00	3.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

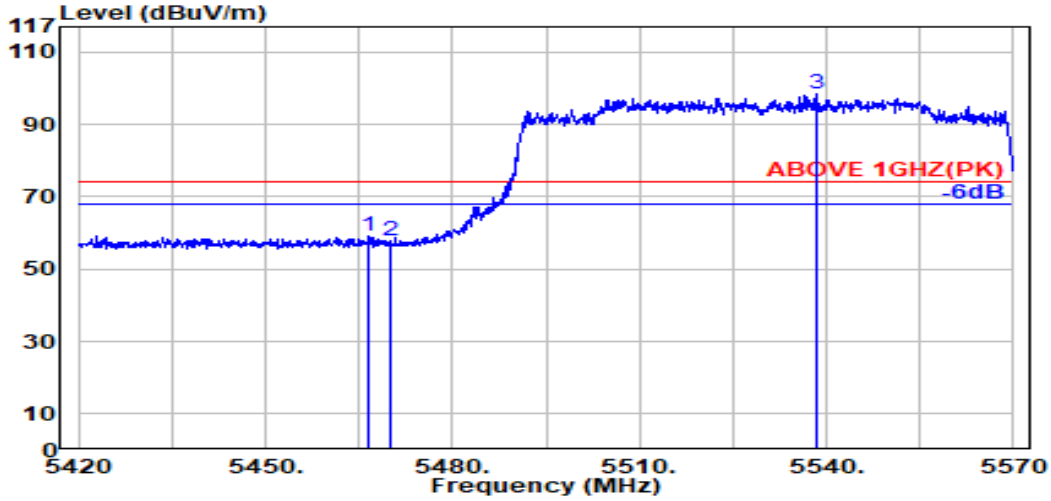

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.25	55.80	59.27	74.00	14.73	Peak
5470.000	34.04	8.69	39.25	54.42	57.89	74.00	16.11	Peak
@ 5538.600	34.02	8.75	39.26	94.74	98.26	---	---	Peak

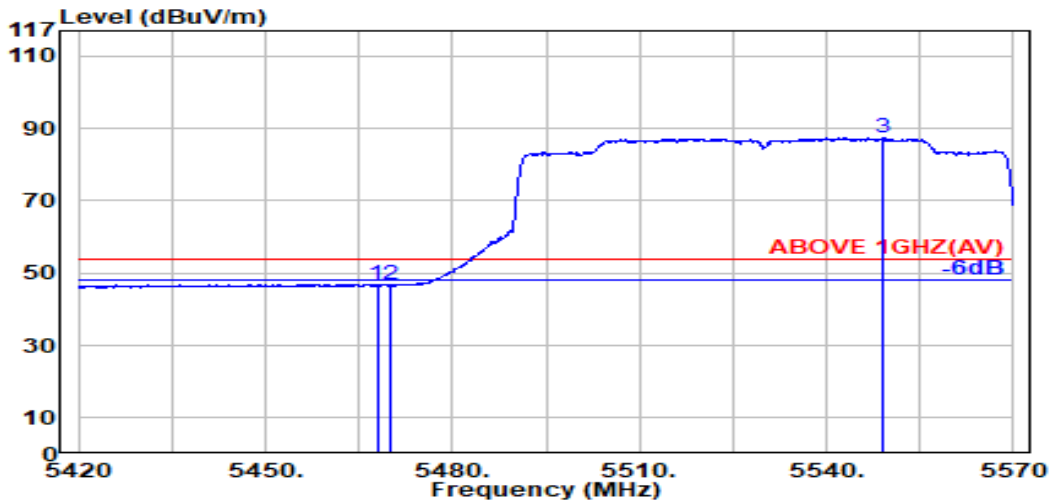


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.25	43.35	46.82	54.00	7.18	Average
5470.000	34.04	8.69	39.25	43.24	46.71	54.00	7.29	Average
@ 5549.200	34.00	8.76	39.26	83.82	87.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

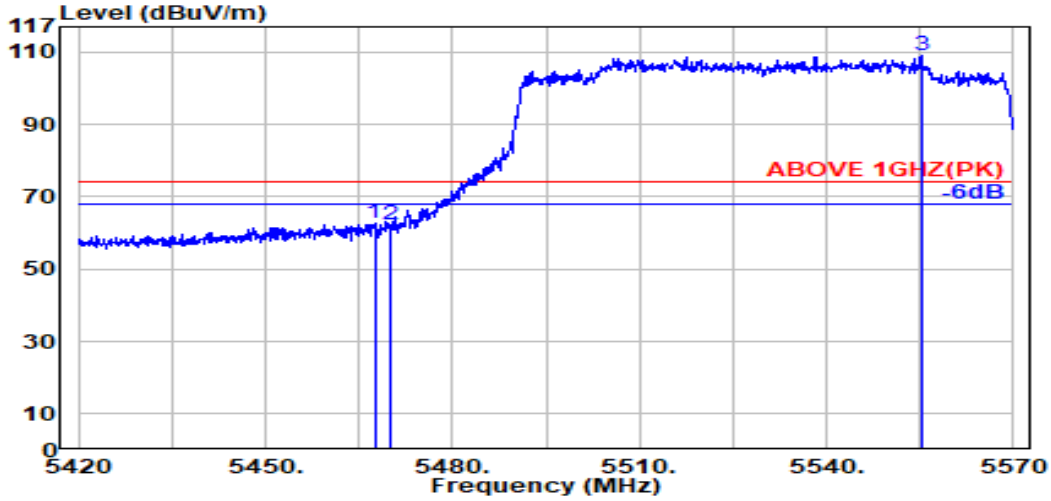

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.25	59.10	62.57	74.00	11.43	Peak
5470.000	34.04	8.69	39.25	58.93	62.40	74.00	11.60	Peak
@ 5555.200	33.98	8.77	39.26	105.68	109.17	---	---	Peak

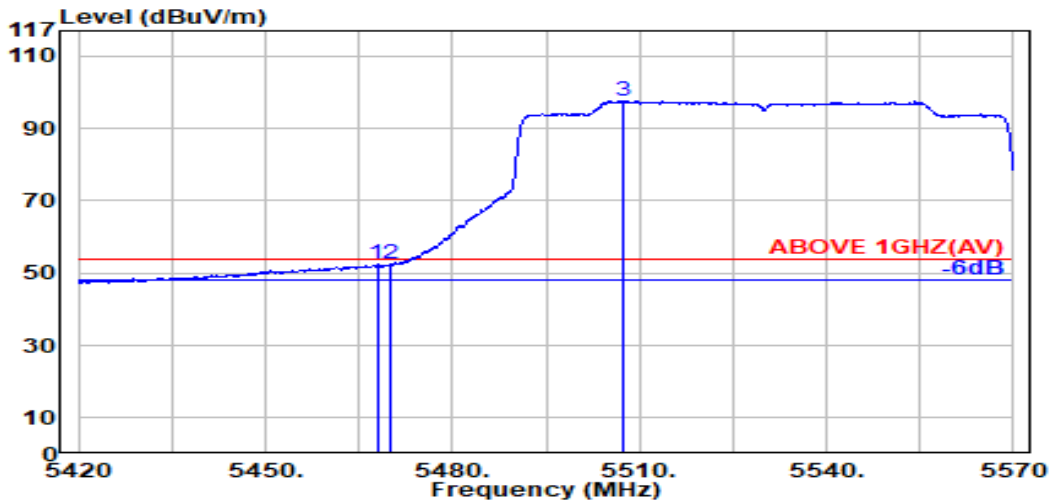


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.25	48.92	52.40	54.00	1.60	Average
5470.000	34.04	8.69	39.25	48.94	52.42	54.00	1.58	Average
@ 5507.300	34.09	8.72	39.25	93.97	97.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

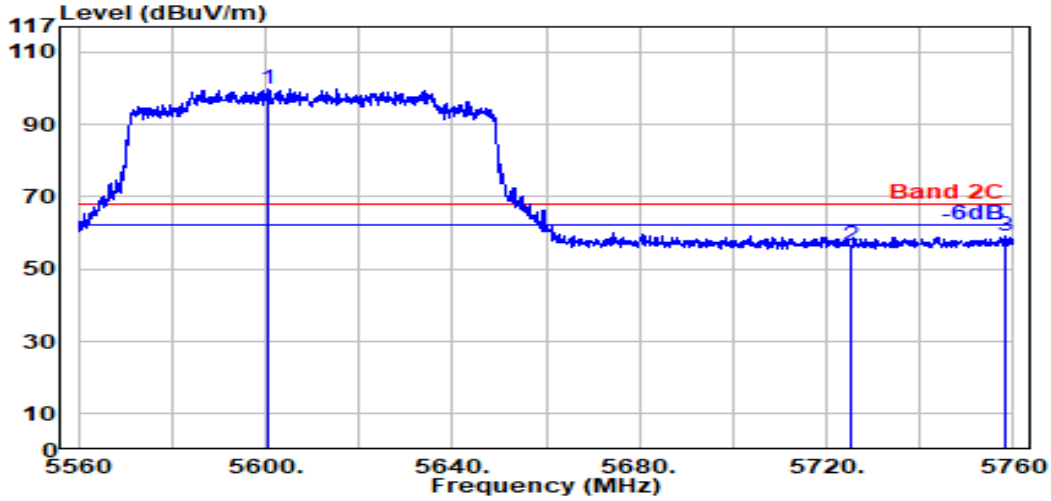

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5600.700	33.80	8.81	39.27	96.64	99.99	---	---	Peak
5725.000	33.60	8.93	39.29	53.43	56.66	68.20	11.54	Peak
5758.100	33.63	8.96	39.30	55.84	59.13	68.20	9.07	Peak

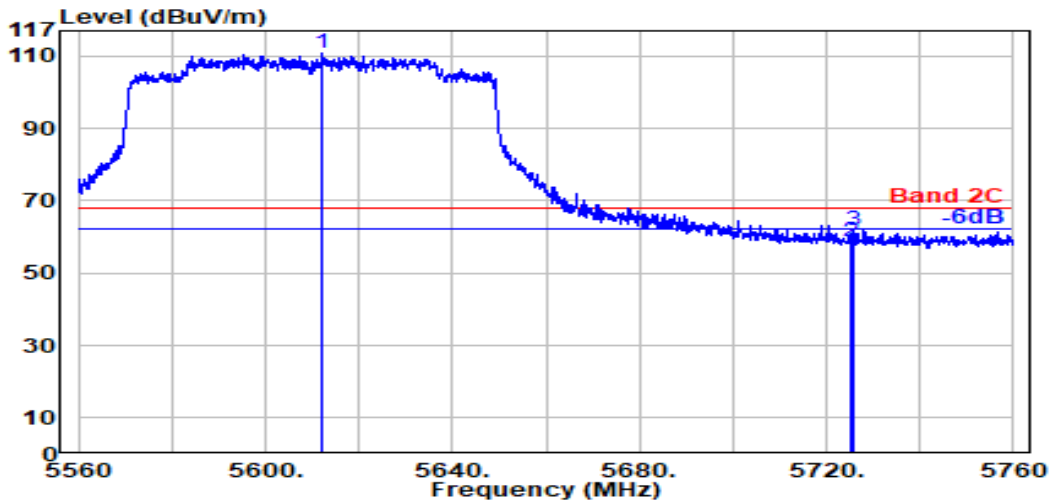


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.000	33.80	8.82	39.27	107.56	110.91	---	---	Peak
5725.000	33.60	8.93	39.29	55.67	58.91	68.20	9.29	Peak
5725.900	33.60	8.93	39.29	58.44	61.68	68.20	6.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

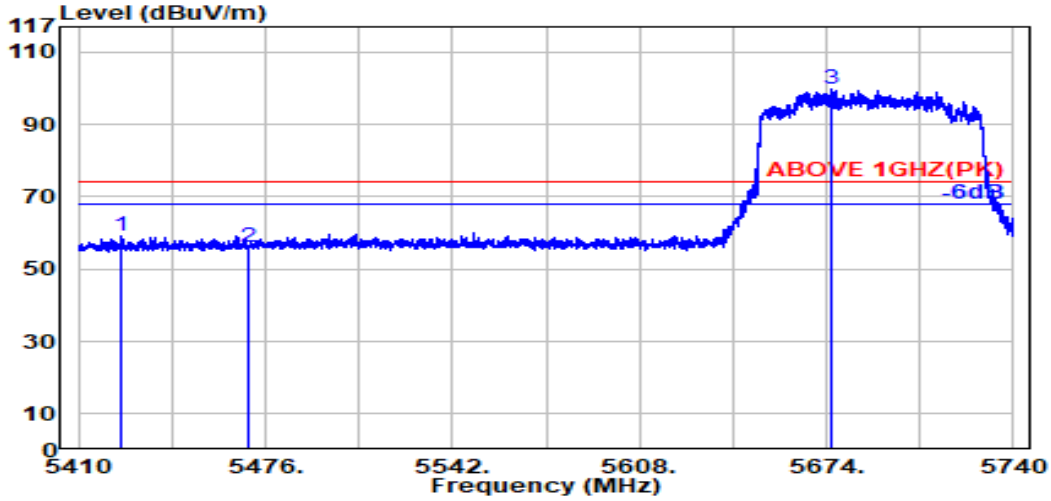

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.000	33.95	8.65	39.25	55.74	59.08	74.00	14.92	Peak
5470.000	34.04	8.69	39.25	52.46	55.94	74.00	18.06	Peak
@ 5675.900	33.70	8.88	39.28	96.32	99.62	---	---	Peak

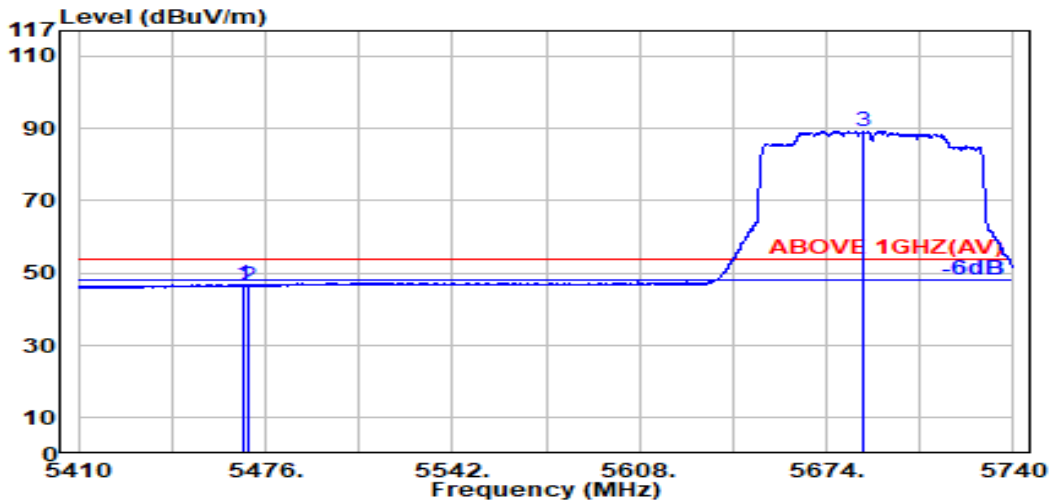


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.25	43.31	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.25	43.09	46.57	54.00	7.43	Average
@ 5686.900	33.65	8.89	39.28	86.01	89.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

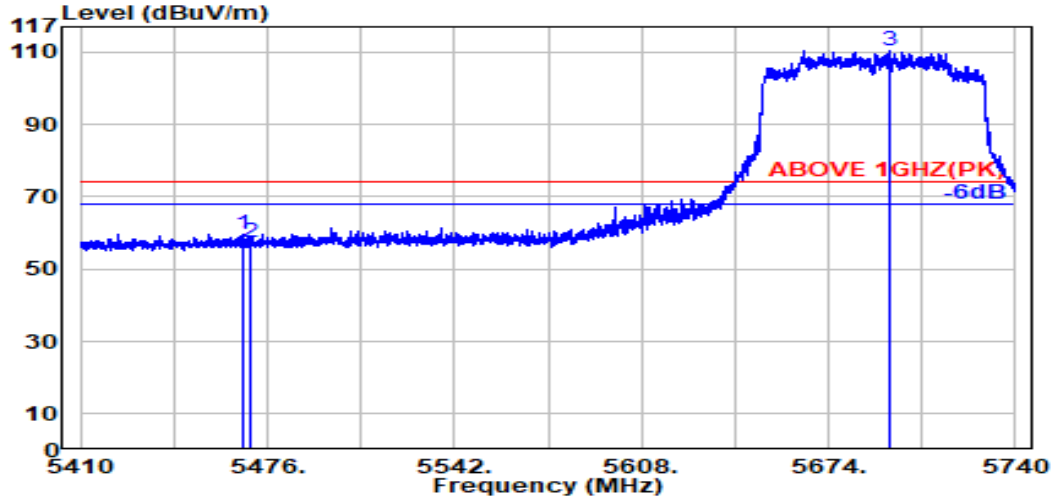

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.25	56.02	59.49	74.00	14.51	Peak
5470.000	34.04	8.69	39.25	54.07	57.55	74.00	16.45	Peak
@ 5695.800	33.62	8.90	39.29	107.28	110.50	---	---	Peak

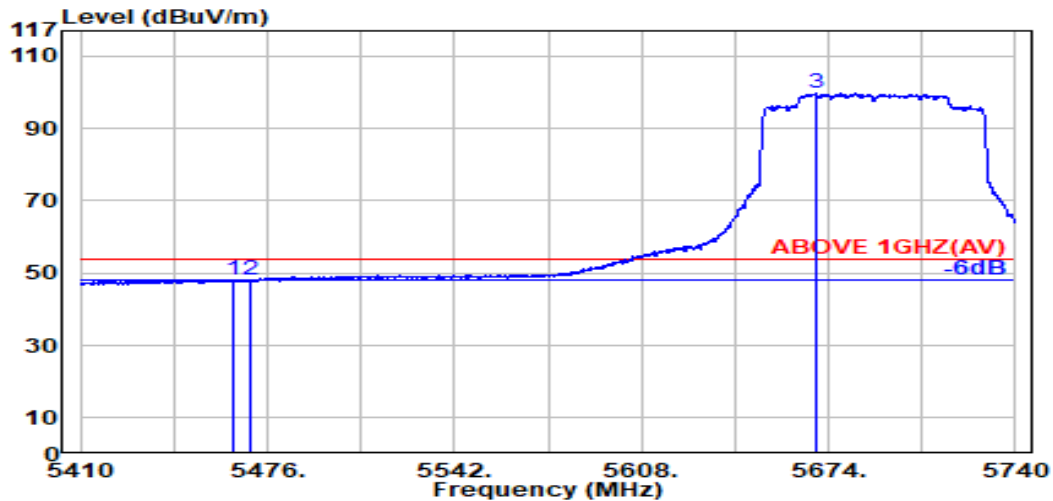


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.03	8.68	39.25	44.82	48.28	54.00	5.72	Average
5470.000	34.04	8.69	39.25	44.46	47.94	54.00	6.06	Average
@ 5669.400	33.72	8.87	39.28	96.34	99.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

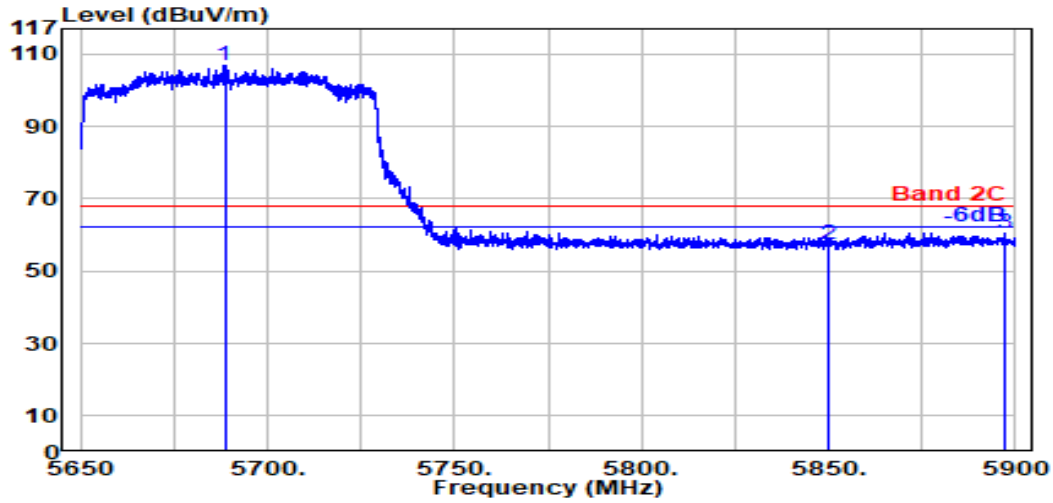

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.571	33.65	8.89	39.28	103.71	106.96	---	---	Peak
5850.000	33.90	9.04	39.31	53.76	57.38	68.20	10.82	Peak
5897.143	34.09	9.08	39.32	56.76	60.61	68.20	7.59	Peak

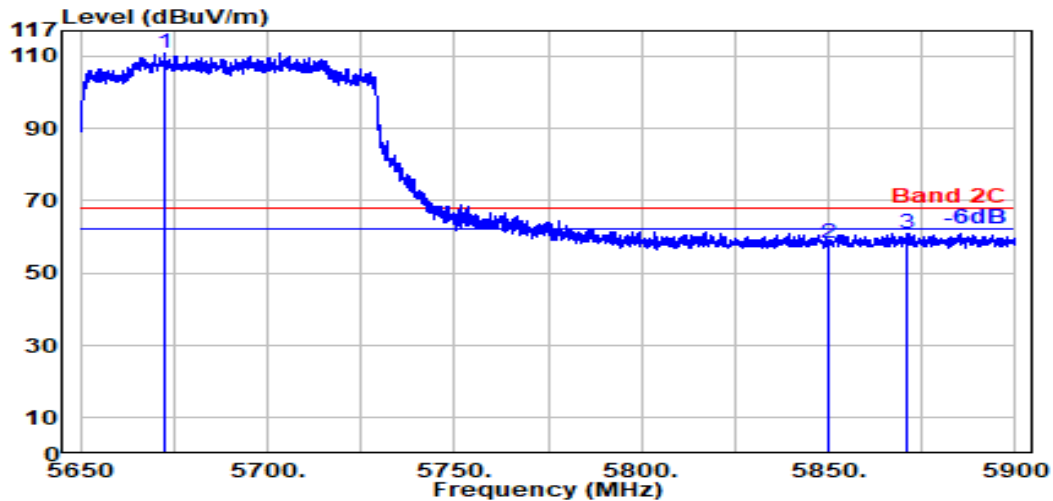

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.571	33.71	8.88	39.28	107.67	110.97	---	---	Peak
5850.000	33.90	9.04	39.31	54.78	58.41	68.20	9.79	Peak
5871.214	33.99	9.06	39.32	57.30	61.03	68.20	7.17	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

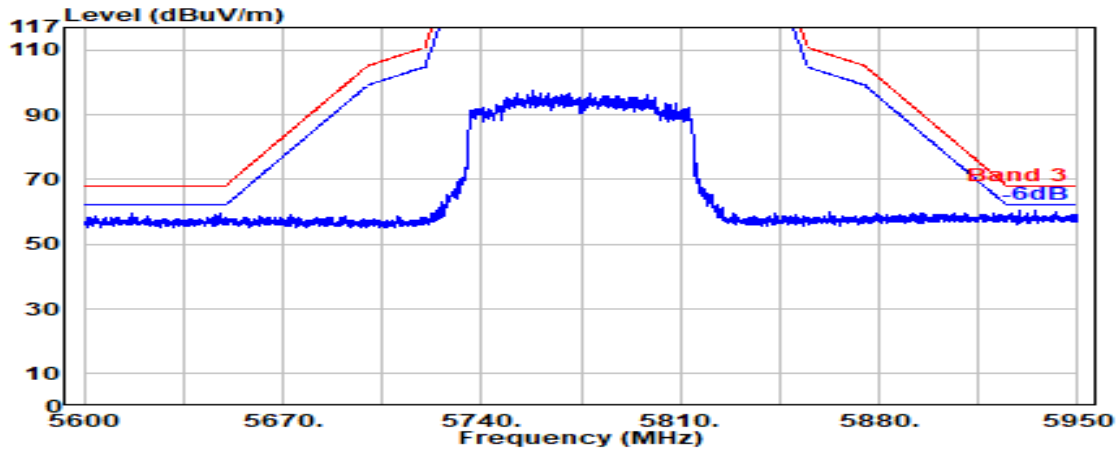

Antenna at Vertical Polarization

