

FCC 15.247 & RSS-247 2.4GHz Test Report

for

LG Electronics Inc.

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea**

Product Name : Notebook Computer
Model Name : (1)17Z95P (2)17ZB95P
(3)17ZD95P (4)17ZG95P
(5)17ZC95P
Brand : LG
FCC ID : BEJNT-17Z95P
IC : 2703H-17Z95P

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	4
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Antenna Information	8
3.4. EUT Specifications Assessed in Current Report	10
3.5. Description of Key Components	11
3.6. Test Configuration	13
3.7. Output Power Setting	13
3.8. Tested Supporting System List.....	14
3.9. Setup Configuration.....	14
3.10. Operating Condition of EUT	14
3.11. Description of Test Facility	15
3.12. Measurement Uncertainty	16
4. MEASUREMENT EQUIPMENTLIST.....	17
4.1. Conducted Emission Measurement	17
4.2. Radiated Emission Measurement	17
4.3. RF Conducted Measurement	17
5. CONDUCTED EMISSION.....	18
5.1. Block Diagram of Test Setup	19
5.2. Conducted Emission Limit	19
5.3. Test Procedure	19
5.4. Test Results	19
6. RADIATED EMISSION	20
6.1. Block Diagram of Test Setup	20
6.2. Radiated Emission Limits.....	22
6.3. Test Procedure	23
6.4. Measurement Result Explanation.....	24
6.5. Test Results	24
7. 20dB/OCCUPIED BANDWIDTH.....	25
7.1. Block Diagram of Test Setup	25
7.2. Specification Limits.....	25
7.3. Test Procedure	25
7.4. Test Results	25
8. CARRIER FREQUENCY SEPARATION	26
8.1. Block Diagram of Test Setup	26
8.2. Specification Limits.....	26
8.3. Test Procedure	26
8.4. Test Results	26
9. TIME OF OCCUPANCY	27
9.1. Block Diagram of Test Setup	27
9.2. Specification Limits.....	27
9.3. Test Procedure	27
9.4. Test Results	27
10. NUMBER OF HOPPING CHANNELS	28



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

10.1. Block Diagram of Test Setup	28
10.2. Specification Limits.....	28
10.3. Test Procedure	28
10.4. Test Results	28
11. MAXIMUM PEAK OUTPUT POWER.....	29
11.1. Block Diagram of Test Setup	29
11.2. Specification Limits.....	29
11.3. Test Procedure	29
11.4. Test Results	29
12. EMISSION LIMITATIONS	30
12.1. Block Diagram of Test Setup	30
12.2. Specification Limits.....	30
12.3. Test Procedure	30
12.4. Test Results	30
13. DEVIATION TO TEST SPECIFICATIONS	31

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TESTPHOTOGRAPHS

TEST REPORT

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory #1 : LG Electronics Nanjing New Technology Co., Ltd.
Factory #2 : LG Electronics Do Brasil Ltda. (048130)
EUT Description
(1) Product : Notebook Computer
(2) Model : (1)17Z95P (2)17ZB95P (3)17ZD95P (4)17ZG95P (5)17ZC95P
(3) Brand : LG
(4) Power Supply: DC 20V, 3.25A

Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), Amendment 2, February 2021
RSS-247 (Issue 2), February 2017
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2021. 08. 27

Reviewed by: Sabrina Wang (Sabrina Wang/Administrator)

Approved by: Johnny Hsueh (Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2021. 08. 27	Original Report	EM-F210602

2. SUMMARY OF TEST RESULTS

Rule		Description	Data Reused	Results
FCC	IC			
15.207	RSS-Gen §8.8	Conducted Emission	No	PASS
15.247(d)/15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	No	PASS
15.247(a)(1)	RSS-247 §5.1(2)	20dB/Occupied Bandwidth	Yes	PASS
15.247(a)(1)	RSS-247 §5.1(2)	Carrier Frequency Separation	Yes	PASS
15.247(a)(1)(iii)	RSS-247 §5.1(4)	Time of Occupancy	Yes	PASS
15.247(a)(1)(iii)	RSS-247 §5.1(4)	Number of Hopping Channels	Yes	PASS
15.247(b)(1)	RSS-247 §5.1(2)	Maximum Peak Output Power	SPOT CHECK Note 2	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	Yes	PASS
15.203	---	Antenna Requirement	---	Compliance

Note: 1. The uncertainties value is not used in determining the result.
 2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, grant on 11/28 2019 and IC: 2703H-15Z90N (Report No.: EM-F190340) approved on 12/04/2019. According to KDB 484596 D01, we did spot check for output power and all output power values keep identical thus we reuse all results.

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory #1	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Factory #2	LG Electronics Do Brasil Ltda. (048130) Avenida Dom Pedro 1, W7777 12091-000 D.I.Piracangagua II, Taubate-SP BRAZIL
Product	Notebook Computer
Model	(1)17Z95P (2)17ZB95P (3)17ZD95P (4)17ZG95P (5)17ZC95P The difference between all models is different in the sales customers. Note: The 5 models [(1)17Z95P (2)17ZB95P (3)17ZD95P (4)17ZG95P (5)17ZC95P] are for FCC ID application, and only 1 model (17Z95P) is for ISED application.
Brand	LG

3.2. Description of EUT

Test Model	17Z95P			
Serial Number	N/A			
Power Rating	DC 20V, 3.25A			
RF Features	WLAN: 802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.0)			
Transmit Type	2.4 GHz			
	802.11b	1T1R		
	802.11g	1T1R		
	802.11n-HT20	2T2R		
	802.11n-HT40	2T2R		
	802.11ax-HE20	2T2R		
	802.11ax-HE40	2T2R		
	BT/BLE	1T1R		
	U-NII Bands			
	802.11a	1T1R		
	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R		
	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R		
	802.11ac-VHT80/802.11ax-HE80	2T2R		
	802.11ac-VHT160/802.11ax-HE160	2T2R		
	The MIMO is uncorrelated and supported SDM mode only.			
	Test Sample	Sample No.	Test Item	Firmware
		02	AC Conduction, RSE, Output Power	N/A
01		AC Conduction, Output Power	N/A	
Sample Status	Mass production			
Date of Receipt	2021. 07. 27			
Date of Test	2021. 08. 12 ~ 20			
Interface Ports of EUT	<ul style="list-style-type: none"> • One Micro SD Card Slot • One Earphone Port • Two USB 3.0 Ports • Two USB Type C Ports • One HDMI Port 			
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • LAN Gender 			

3.3. Reference Test Guidance

None

3.4. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
1.	WA-P-LELE-04-003 (Main)	INPAQ	Mono-Pole	2400~2500	5.2
				5100-5250	3.8
				5250-5350	3.8
				5350-5725	2.4
				5725~5825	2.7
	WA-P-LELE-04-003 (AUX)	INPAQ	Mono-Pole	2400~2500	6.8
				5100-5250	3.8
				5250-5350	3.8
				5350-5725	2.4
				5725~5825	2.7
2.	L1LRF006-CS-H (Main)	LUXSHARE- ICT	Mono-Pole	2400~2500	1.7
				5150-5250	2.8
				5250-5350	2.8
				5350-5725	2.0
				5725~5850	3.1
	L1LRF006-CS-H (AUX)	LUXSHARE- ICT	Mono-Pole	2400~2500	1.8
				5150-5250	1.6
				5250-5350	2.9
				5350-5725	2.9
				5725~5850	2.7

3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3

Channel List							
Channel Number	Frequency (MHz)						
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.6. Description of Key Components

3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win10 Home	---
		Win 10 Pro	
		Win11 Home	---
Main Board	LG	Blanc MAIN B/D PCB	Manufacturer: #1 Hannstar Board Tech(Jiang Yin) Corp.,Ltd. #2 Elec & Eltek Company (MCO) Limited.
		1xZ90P MAIN B/D PCB	
WLAN SUB Board	LG	17Z90P SUB B/D	Manufacturer: #1 Hannstar Board Tech(Jiang Yin) Corp.,Ltd. #2 Elec & Eltek Company (MCO) Limited. #3 JiangSu HuaShen Electronic co.,ltd (HXF)
CPU (Socket: FCBGA1449)	Intel	i7-1195G7	2.9GHz
	Intel	i5-1155G7	2.5GHz
	Intel	i3-1125G4	2.0GHz
17" LCD Panel	LG Display	LP170WQ1(SP)(E1)	Resolution: 2560 x 1600, 60Hz WQXGA IPS
Storage (SSD)	SK hynix	HFM256GD3JX013N	256GB (M.2)
		HFM512GD3JX013N	512GB (M.2)
		HFM001TD3JX013N	1TB (M.2)
Memory (RAM)	Samsung	---	16GB LPDDR4x(On Board)
	Samsung	---	8GB LPDDR4x(On Board)
	SK Hynix	---	16GB LPDDR4x(On Board)
	SK Hynix	---	8GB LPDDR4x(On Board)
	SK Hynix	---	32GB LPDDR4x(On Board)
Battery Pack	LG	LBV7227E	80Wh, DC 7.74V, 80Wh Typ 10336mAh
WLAN Combo Card	Intel	AX201D2W	WLAN and BT, 2x2 CNVi 1216 FCC ID: PD9AX201NG IC: 1000M-AX201NG NCC ID: CCAH18LP3410T5
WLAN Combo Antenna	LG (LUXSHARE-ICT)	L1LRF006-CS-H	PCB, Mono-pole Typ Main: Black, Aux: Gray
	LG (INPAQ)	WA-P-LELE-04-003	PCB, Mono-pole Type Main: Black, Aux: Gray
Keyboard	TIC	KT0120B9	---
	LITE ON	SN8002	---
Web Camera	Chicony	CKFKH33-0	---
	Luxvisions	0BF108N3	---
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
	SUZHOU MEC ELECTRONICS	80-5946-200	(White) 10/100/1000 Megabit Ethernet
		80-5946-210	(Black) 10/100/1000 Megabit Ethernet
Type C to LAN: Shielded, Undetached, 0.13m			
AC Adapter (65W)	LG (HONOR)	ADT-65DSU-D03-2	I/P: AC 100-240V, 1.6A, 50-60Hz O/P: DC 20V, 3.25A
	DC Power Cord: Non-Shielded, Undetached, 1.5m AC Power Cord: Non-Shielded, Detached, 1.0m (2C) (For Other Countries) AC Power Cord: Non-Shielded, Detached, 1.55m (2C) (For US, Canada, Mexico)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU		#1	#2
Main Board	LG, Blanc MAIN B/D PCB	V	V
SUB Board	LG, 17Z95N WLAN SUB B/D	V	V
CPU	Intel, i7-1195G7	V	
	Intel, i5-1155G7		V
17" LCD Panel	LG Display, LP170WQ1(SP)(E1)	V	V
Storage (SSD)	SK hynix, 1TB *2	V	V
Memory (RAM)	SK Hynix, 32GB	V	V
Battery Pack	LG, LBV7227E	V	V
WLAN Combo Card	Intel, AX201D2W	V	V
WLAN Combo Antenna	LG (INPAQ), WA-P-LELE-04-003		V
	LG (LUXSHARE-ICT), L1LRF006-CS-H	V	
Keyboard	TIC, KT0120B9	V	V
Web Camera	Chicony, CKFKH33-0	V	V
Type C *2	LAN Gender	ARIN TECH CO. LTD, GD-08MF-36-WH-LP10	V
	AC Adapter	LG (HONOR), ADT-65DSU-D03-2	V

3.7. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Correction Factor (dB)
BT	N/A	2.890	N/A

AC Conduction	
SKU #2	Normal operation [SKU #2 (with INPAQ Antenna)]
SKU #1	Normal operation [SKU #1 (with LUXSHARE-ICT Antenna)]

Item		Modulation	Data Rate	Test Channel
Radiated Test Case	SKU #2	Radiated Band Edge ^{Note 1 & 2}		00/78
		GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
		Radiated Spurious Emission ^{Note 1}		00/39/78
Conducted Test Case	20dB/Occupied Bandwidth (Data Reused)	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation (Data Reused)	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Time of Occupancy (Data Reused)	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Number of Hopping Channels (Data Reused)	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Maximum Peak Output Power (SPOT Check)	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edges (Data Reused)	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Spurious Emission (Data Reused)	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

Note 1: Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

Note 2: We performed testing of the highest and lowest data rate.

3.8. Output Power Setting

SPOT CHECK

Centre Frequency (MHz)	Power Setting	
	GFSK	8-DPSK
2402	12	12
2441	12	12
2480	12	12

3.9. Tested Supporting System List

3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	TV	LG	22LK330-DB	N/A	N/A
2.	USB Mouse	Beauty	A11	N/A	FCC By DoC
3.	Earphone	APPLE	N/A	N/A	N/A
4.	SD Card	ADATA	MicroSDHC Card	N/A	N/A
Partner System					
5.	AP Server	ASUS	RT-AX88U	N/A	FCC ID: MSQ-RTAXHP00 IC: 3568A-RTAXHP00

3.9.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8m
3.	Earphone Cable: Unshielded, Undetachable, 0.9m
4.	N/A
5.	AC adapter: M/N:WA-30B12, Cable: Unshielded, Detachable, 1.2m LAN cable: Unshielded, Detachable, 3.0m
6.	LAN cable: Unshielded, Detachable, 1.8m

3.10. Setup Configuration

3.10.1. EUT Configuration for Power Line & Radiated Emission

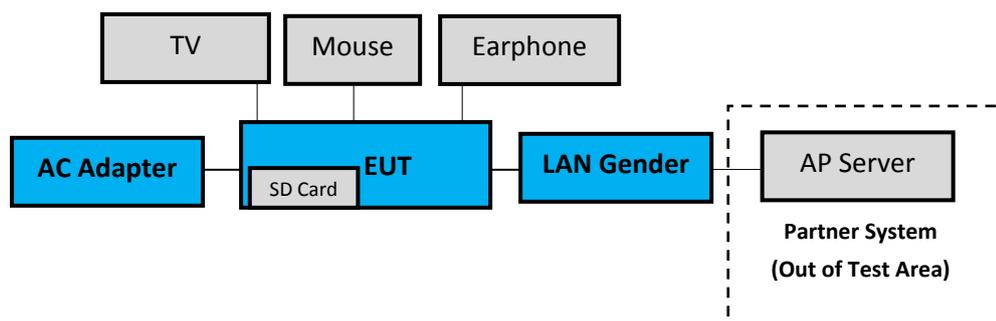

3.10.2. EUT Configuration for RF Conducted Test Items



3.11. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber (3) Fully Anechoic Chamber

3.13.Measurement Uncertainty

Test Items/Facilities		Frequency Range	Uncertainty	
Conduction Test		9kHz-150kHz	±3.7dB	
		150kHz-30MHz	±3.4dB	
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.5dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.7dB
			6GHz-18GHz, 3m	±4.1dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
			200MHz-1000MHz, 3m, Horizontal	±4.5dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±5.0dB
			6GHz-18GHz, 3m	±4.7dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.2dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
1GHz-6GHz, 3m			±4.8dB	
6GHz-18GHz, 3m			±4.5dB	
<input checked="" type="checkbox"/>	Fully Anechoic Chamber	30MHz~1000MHz	±4.6dB	
		1GHz~18GHz	±5.4dB	
		18GHz~40GHz	±3.52dB	
		40GHz~260GHz	±3.56dB	

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	±0.2kHz
99% Occupied Bandwidth	±0.38%
Carrier Frequency Separation	±0.2kHz
Time of Occupancy	±0.03sec
Maximum peak Output power	± 0.52dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2021.02.02	1 Year
2.	A.M.N.	R&S	ENV432	101567	2021.04.21	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2020.12.10	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2021.01.04	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2021.04.15	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2020.09.19	1 Year
7.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2021.01.14	1 Year
2.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2020.09.16	1 Year
3.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2021.04.14	1 Year
4.	Test Receiver	R&S	ESCS30	100039	2021.06.02	1 Year
5.	Amplifier	HP	8447D	2944A07178	2021.04.14	1 Year
6.	Microwave Preamplifier	Agilent	8449B	3008A02678	2021.02.19	1 Year
7.	Microwave Amplifier	Keysight	83051A	MY53010042	2021.07.30	1 Year
8.	Loop Antenna	R&S	HFH2-Z2	891847/27	2019.12.26	2 Years
9.	Bilog Antenna	TESEQ	CBL6112D	33821	2021.07.16	1 Year
10.	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00135902	2021.03.19	1 Year
11.	Horn Antenna	COM-POWER	AH-840	101092	2021.01.05	1 Year
12.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/ E130.5-O/O	2	2021.07.24	1 Year
13.	3GHz Notch Filter	Microwave	H3G018G1	484796	2021.07.24	1 Year
14.	Coaxial Cable	MIYAZAKI	5D2W	CLAMP-01	2020.09.19	1 Year
15.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2021.01.29	1 Year
16.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 104	RE-29	2020.09.19	1 Year
17.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2020.09.19	1 Year
18.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2021.04.15	1 Year
19.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2021.04.15	1 Year
20.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.
21.	Test Software	Audix	e3	V6.110601	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2021.01.06	1 Year
2.	Power Meter	Anritsu	ML2487A	6K00005406	2021.04.28	1 Year
3.	Power Sensor	Anritsu	MA2491A	030873	2021.04.28	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2021.04.15	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.9

5.1.2. Shielded Room Setup Diagram

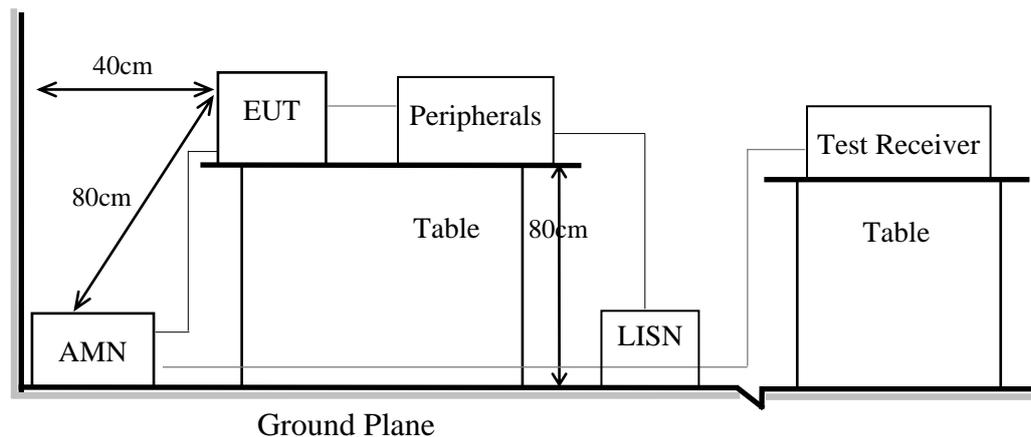

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.9

6.1.2. Setup Diagram for 9kHz-30MHz

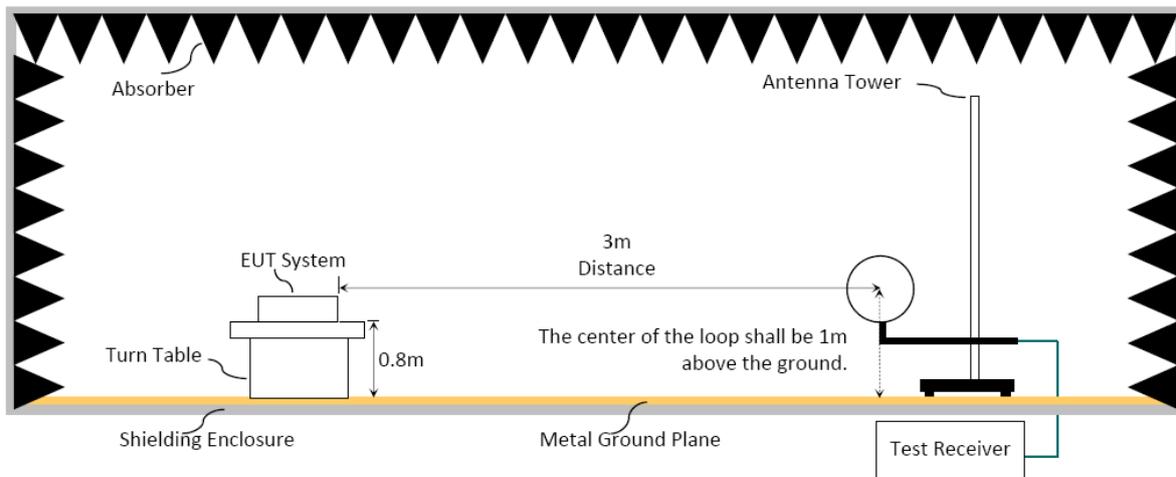


6.1.3. Setup Diagram for 30-1000MHz

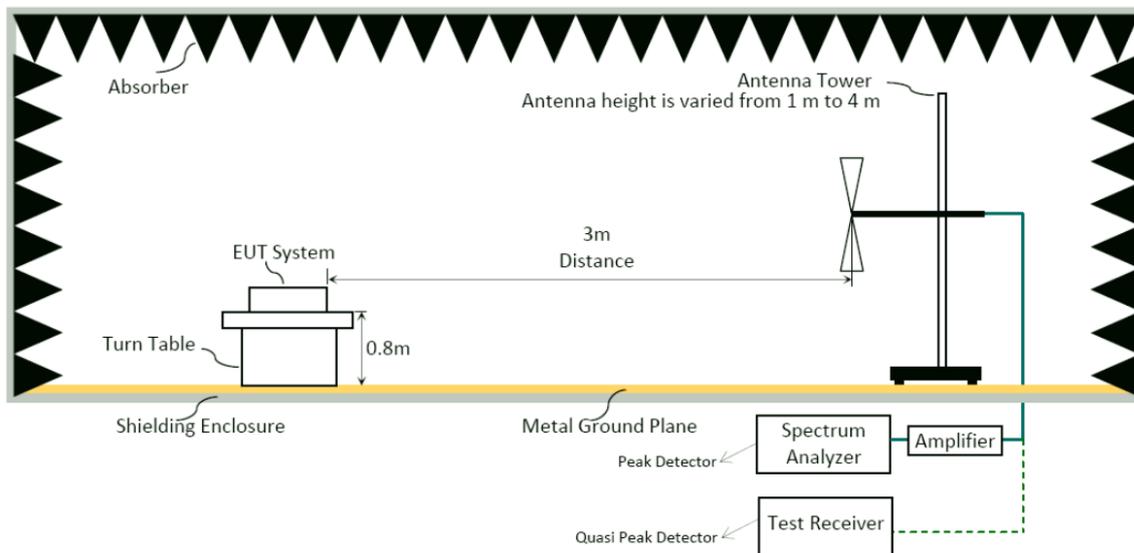


6.1.4. Setup Diagram for above 1GHz

Fully Anechoic Chamber

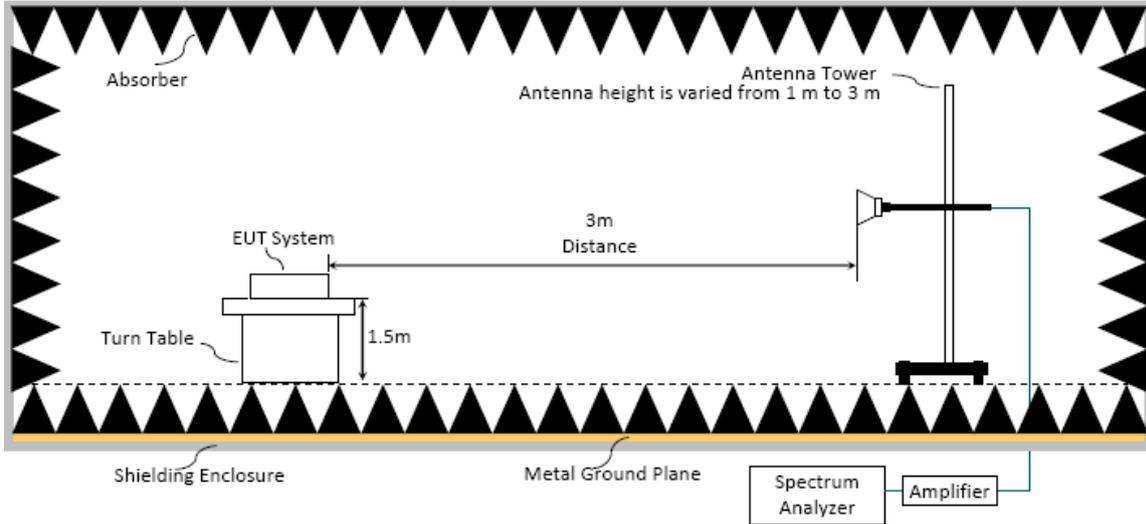

Semi Anechoic Chamber

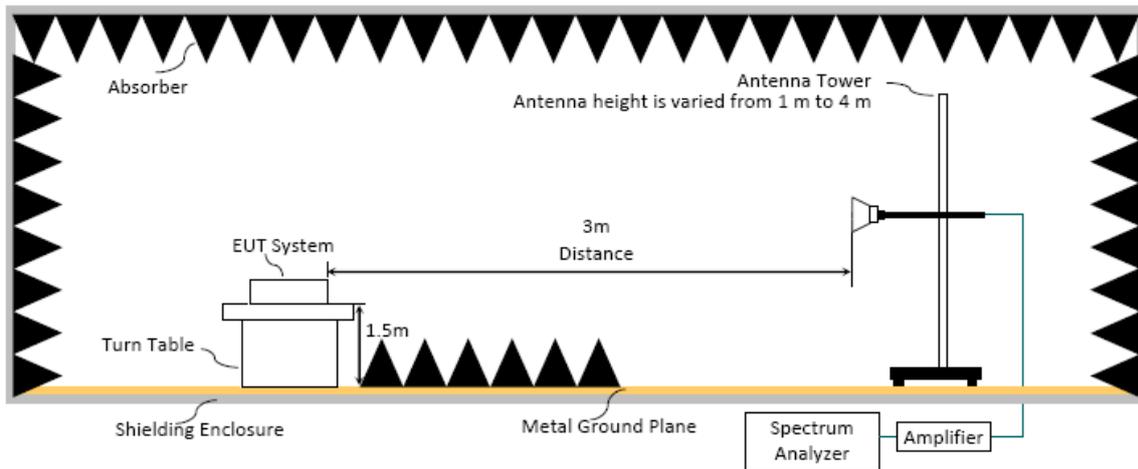

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m (for 30-1000MHz) and from 1m to 3m (for above 1GHz at fully Anechoic Chamber) or from 1 m to 4 m (for above 1GHz at Semi Anechoic Chamber) to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector: **Option 1:**

- (1) RBW = 1MHz
- (2) VBW \geq 1/ T.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

 Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.6


ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 20DB/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

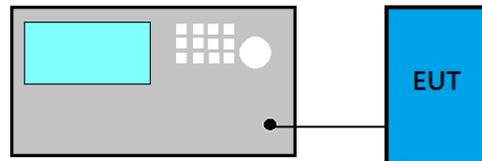

7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

For 20dB Bandwidth

- (1) Set Span range 2~5 times the OBW
- (2) Set $VBW \geq 3 \times RBW$.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

For 99% Occupied Bandwidth


- (8) Set Span range 1.5~5 times the OBW
- (9) Set RBW close to 1% to 5% of OBW.
- (10) Set $VBW \geq 3 \times RBW$.
- (11) Detector = Peak.
- (12) Trace mode = Max hold
- (13) Sweep = Auto couple.
- (14) Allow the trace to stabilize.

7.4. Test Results

Please refer to Appendix A

8. CARRIER FREQUENCY SEPARATION

8.1. Block Diagram of Test Setup

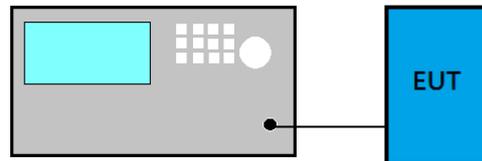

8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = Wide enough to capture the peaks of two adjacent channels
- (2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold
- (7) Allow the trace to stabilize.

8.4. Test Results

Please refer to Appendix A

9. TIME OF OCCUPANCY

9.1. Block Diagram of Test Setup

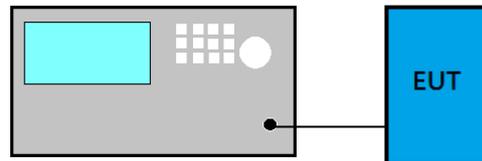

9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: Zero span, centered on a hopping channel.
- (2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- (3) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- (4) Detector function = Peak
- (5) Trace = Max hold

9.4. Test Results

Please refer to Appendix A

10. NUMBER OF HOPPING CHANNELS

10.1. Block Diagram of Test Setup

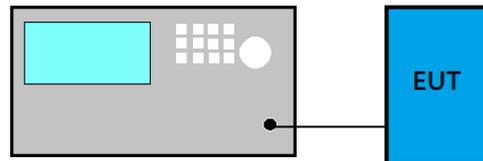

10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- (2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = m=Max hold
- (7) Allow the trace to stabilize.

10.4. Test Results

Please refer to Appendix A

11. MAXIMUM PEAK OUTPUT POWER

11.1. Block Diagram of Test Setup

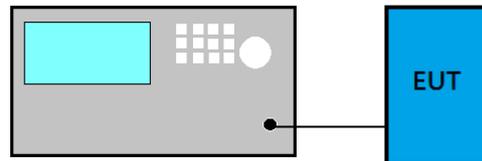

11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

11.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (a) Use the following spectrum analyzer settings
 - (1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - (2) RBW > 20 dB bandwidth of the emission being measured.
 - (3) VBW \geq RBW
 - (4) Sweep: Auto
 - (5) Detector function: Peak
 - (6) Trace: Max hold
- (b) Allow trace to stabilize.
- (c) Use the marker-to-peak function to set the marker to the peak of the emission.

11.4. Test Results

Please refer to Appendix A

12. EMISSION LIMITATIONS

12.1. Block Diagram of Test Setup

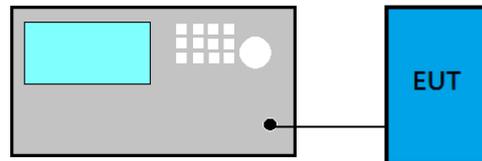

12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

12.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10th harmonic.
- (2) RBW = 100 kHz
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

12.4. Test Results

Please refer to Appendix A



13. DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST DATA AND PLOTS

(Model: 17Z95P)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS


(Model: 17Z95P)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	15
A.2.3 Emissions in Non-restricted Frequency Bands:.....	15
A.3 20dB BANDWIDTH	16
A.3.1 20dB Bandwidth Result.....	16
A.3.2 Measurement Plots	17
A.4 CARRIER FREQUENCY SEPARATION	18
A.5 TIME OF OCCUPANCY	20
A.5.1 Time of Occupancy	20
A.6 NUMBER OF HOPPING CHANNELS	30
A.7 MAXIMUM PEAK OUTPUT POWER	31
A.7.1 Maximum Peak Output Power	31
A.7.2 Measurement Plots	32
A.8 EMISSION LIMITATIONS MEASUREMENT	33
A.8.1 Band Edge.....	33
A.8.2 Spurious Emission	35

A.1 CONDUCTED EMISSION

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

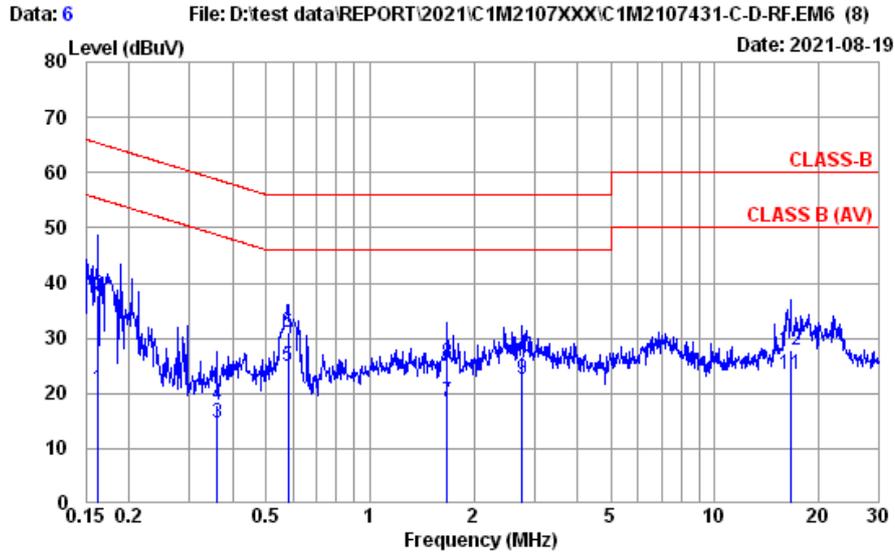


Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 52%	Engineer	: Roy Hung
EUT Model	: 17Z95P	Test Rating	: 120Vac/60
Test Mode	: Operating IHPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	0.41	20.69	55.34	34.65	Average
2	0.162	10.40	0.03	9.85	17.39	37.67	65.34	27.67	QP
3	0.360	10.37	0.03	9.85	-5.72	14.53	48.74	34.21	Average
4	0.360	10.37	0.03	9.85	-2.37	17.88	58.74	40.86	QP
5	0.579	10.37	0.03	9.85	4.63	24.88	46.00	21.12	Average
6	0.579	10.37	0.03	9.85	10.82	31.07	56.00	24.93	QP
7	1.671	10.40	0.05	9.86	-1.79	18.52	46.00	27.48	Average
8	1.671	10.40	0.05	9.86	5.22	25.53	56.00	30.47	QP
9	2.765	10.43	0.07	9.86	2.26	22.62	46.00	23.38	Average
10	2.765	10.43	0.07	9.86	6.20	26.56	56.00	29.44	QP
11	16.573	10.99	0.18	9.92	2.27	23.36	50.00	26.64	Average
12	16.573	10.99	0.18	9.92	6.66	27.75	60.00	32.25	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

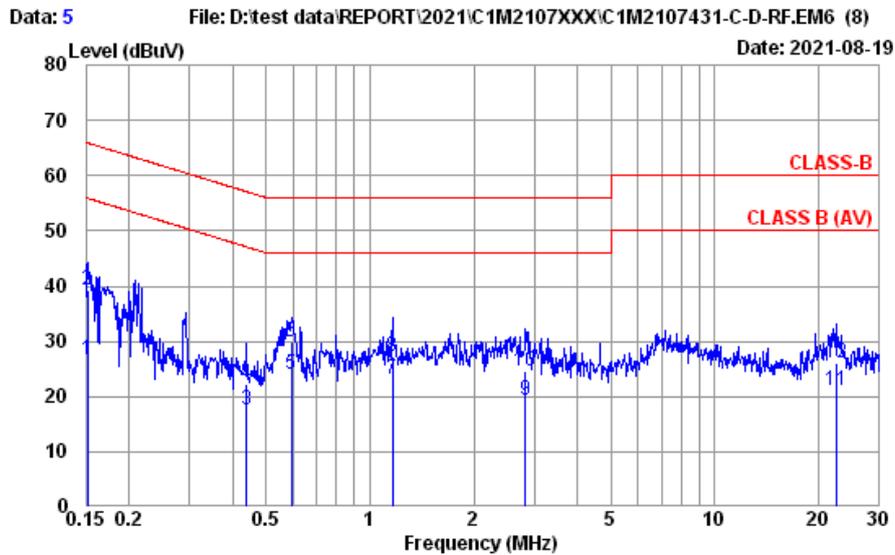


Site No. : No.8 Shielded Room Data No. : 5
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-22 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 26°C / 52% Engineer : Roy Hung
 EUT Model : 17Z95P Test Rating : 120Vac/60
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	6.50	26.78	55.91	29.13	Average
2	0.152	10.40	0.03	9.85	18.89	39.17	65.91	26.74	QP
3	0.437	10.37	0.03	9.85	-2.59	17.66	47.11	29.45	Average
4	0.437	10.37	0.03	9.85	2.10	22.35	57.11	34.76	QP
5	0.592	10.37	0.03	9.85	3.67	23.92	46.00	22.08	Average
6	0.592	10.37	0.03	9.85	9.58	29.83	56.00	26.17	QP
7	1.160	10.38	0.04	9.85	2.92	23.19	46.00	22.81	Average
8	1.160	10.38	0.04	9.85	7.01	27.28	56.00	28.72	QP
9	2.824	10.41	0.08	9.86	-0.98	19.37	46.00	26.63	Average
10	2.824	10.41	0.08	9.86	4.39	24.74	56.00	31.26	QP
11	22.655	10.80	0.21	9.96	0.02	20.99	50.00	29.01	Average
12	22.655	10.80	0.21	9.96	5.04	26.01	60.00	33.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

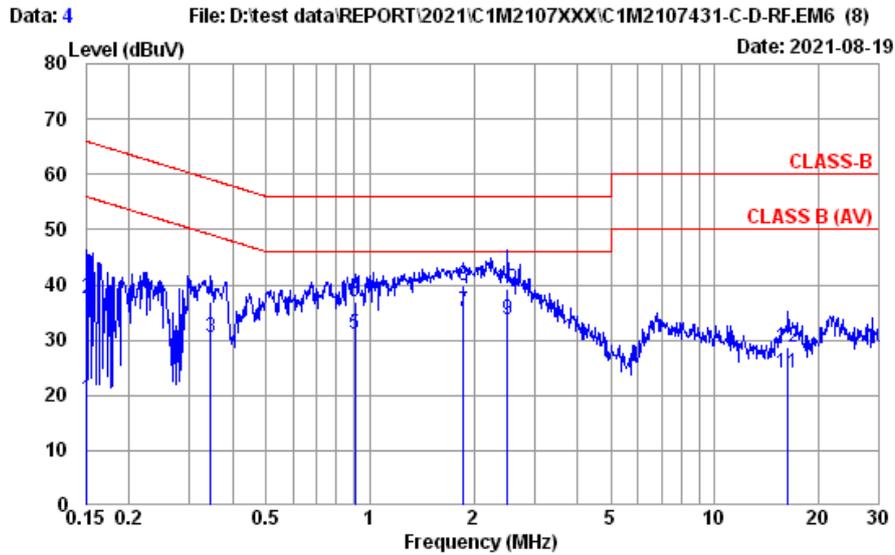


Site No. : No.8 Shielded Room Data No. : 4
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LIIE
 Environment : 26°C / 52% Engineer : Roy Hung
 EUT Model : 17Z95P Test Rating : 120Vac/60
 Test Mode : Operating
 LUXSHARE

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	-1.08	19.20	55.96	36.76	Average
2	0.151	10.40	0.03	9.85	17.25	37.53	65.96	28.43	QP
3	0.345	10.37	0.03	9.85	10.36	30.61	49.09	18.48	Average
4	0.345	10.37	0.03	9.85	16.59	36.84	59.09	22.25	QP
5	0.904	10.38	0.04	9.85	10.84	31.11	46.00	14.89	Average
6	0.904	10.38	0.04	9.85	16.64	36.91	56.00	19.09	QP
7	1.868	10.40	0.06	9.86	14.74	35.06	46.00	10.94	Average
8	1.868	10.40	0.06	9.86	19.64	39.96	56.00	16.04	QP
9	2.500	10.41	0.07	9.86	13.42	33.76	46.00	12.24	Average
10	2.500	10.41	0.07	9.86	18.86	39.20	56.00	16.80	QP
11	16.312	10.71	0.18	9.92	3.23	24.04	50.00	25.96	Average
12	16.312	10.71	0.18	9.92	7.96	28.77	60.00	31.23	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

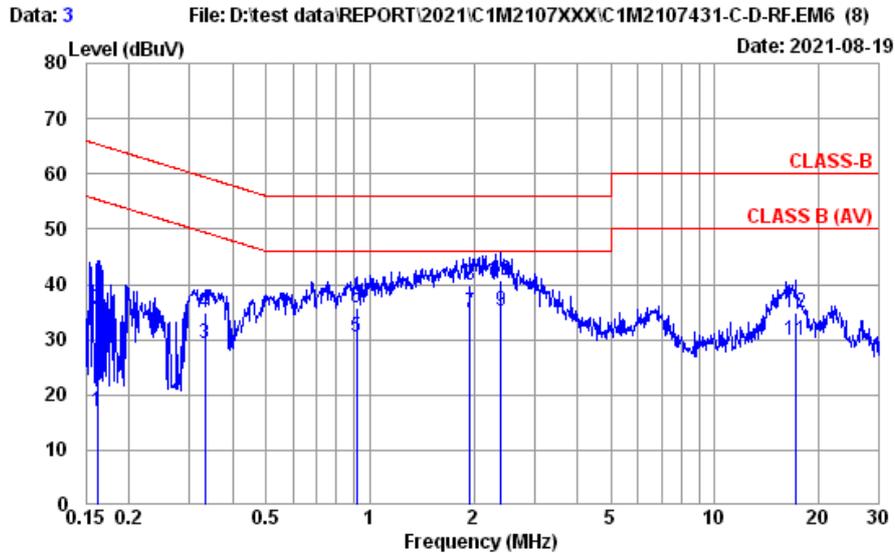

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 52%	Engineer	: Roy Hung
EUT Model	: 17Z95P	Test Rating	: 120Vac/60
Test Mode	: Operating		
	LUXSHARE		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	-3.30	16.98	55.38	38.40	Average
2	0.162	10.40	0.03	9.85	15.13	35.41	65.38	29.97	QP
3	0.332	10.38	0.03	9.85	9.05	29.31	49.40	20.09	Average
4	0.332	10.38	0.03	9.85	14.74	35.00	59.40	24.40	QP
5	0.914	10.38	0.04	9.85	10.16	30.43	46.00	15.57	Average
6	0.914	10.38	0.04	9.85	15.55	35.82	56.00	20.18	QP
7	1.949	10.41	0.06	9.86	14.56	34.89	46.00	11.11	Average
8	1.949	10.41	0.06	9.86	19.56	39.89	56.00	16.11	QP
9	2.396	10.42	0.07	9.86	14.81	35.16	46.00	10.84	Average
10	2.396	10.42	0.07	9.86	20.32	40.67	56.00	15.33	QP
11	17.199	11.01	0.18	9.92	8.86	29.97	50.00	20.03	Average
12	17.199	11.01	0.18	9.92	13.79	34.90	60.00	25.10	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2021/08/13~20	Temp./Hum.	23~26°C/55~59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #2 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
169.680	15.34	3.07	25.92	43.55	36.04	43.50	7.46	Peak
236.610	17.43	3.73	25.76	49.35	44.75	46.00	1.25	Peak
423.820	21.83	5.77	26.69	38.02	38.93	46.00	7.07	Peak
593.570	24.23	6.75	27.42	35.95	39.51	46.00	6.49	Peak
883.600	26.25	8.35	27.09	35.62	43.13	46.00	2.87	Peak
996.120	27.10	8.95	26.69	28.35	37.71	54.00	16.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
53.280	13.34	1.62	26.46	46.29	34.79	40.00	5.21	Peak
119.240	17.95	2.52	26.17	46.54	40.84	43.50	2.66	Peak
238.550	17.53	3.74	25.76	43.60	39.11	46.00	6.89	Peak
451.950	22.35	6.03	26.86	36.82	38.34	46.00	7.66	Peak
762.350	25.54	7.63	27.37	34.83	40.63	46.00	5.37	Peak
963.140	26.83	8.78	26.82	30.96	39.75	54.00	14.25	Peak


A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:

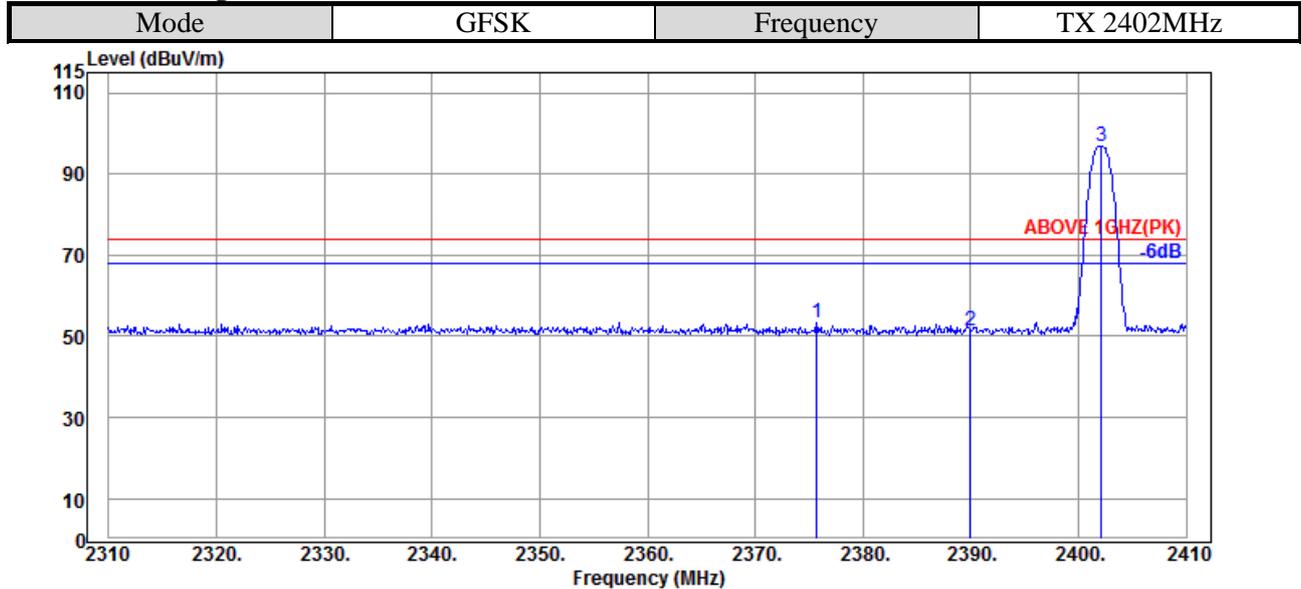

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.700	31.97	7.94	34.53	48.03	53.41	74.00	20.59	Peak
2390.000	31.89	7.95	34.54	45.98	51.28	74.00	22.72	Peak
@ 2402.100	31.80	7.95	34.54	91.57	96.78	---	---	Peak

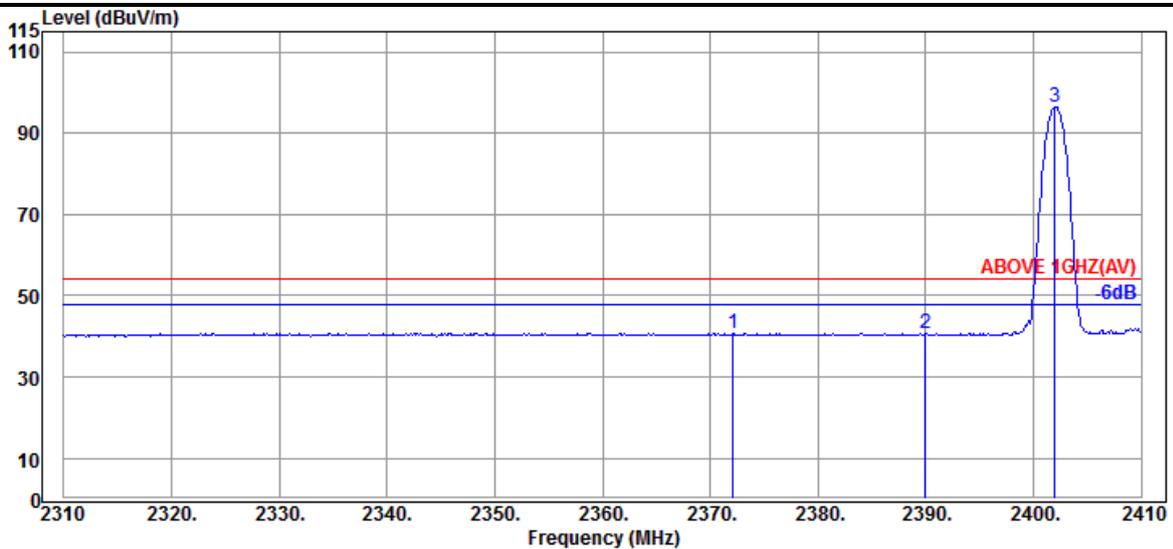


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.100	31.97	7.94	34.53	35.46	40.84	54.00	13.16	Average
2390.000	31.89	7.95	34.54	35.22	40.52	54.00	13.48	Average
@ 2402.000	31.80	7.95	34.54	91.33	96.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

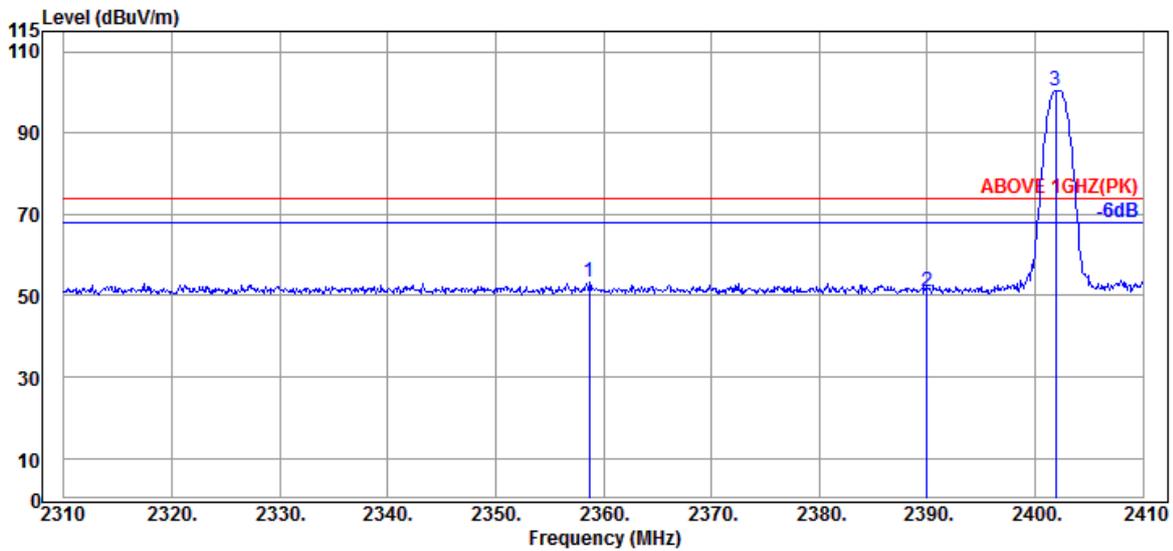

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.700	32.06	7.93	34.53	47.75	53.21	74.00	20.79	Peak
2390.000	31.89	7.95	34.54	45.68	50.98	74.00	23.02	Peak
@ 2401.900	31.80	7.95	34.54	95.27	100.48	---	---	Peak

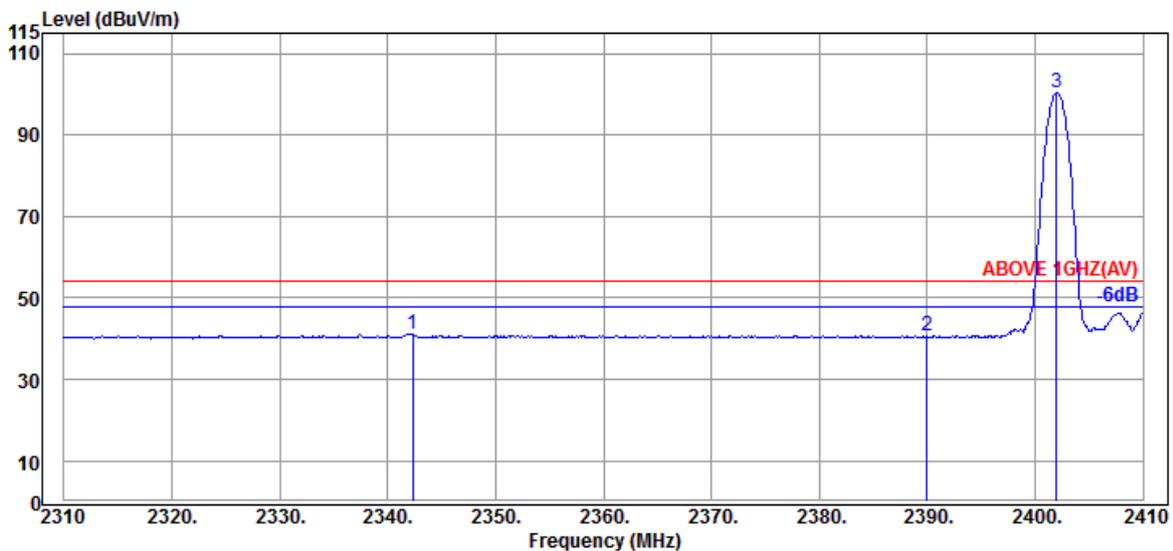


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.300	32.05	7.92	34.53	35.73	41.17	54.00	12.83	Average
2390.000	31.89	7.95	34.54	35.27	40.57	54.00	13.43	Average
@ 2402.000	31.80	7.95	34.54	95.09	100.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

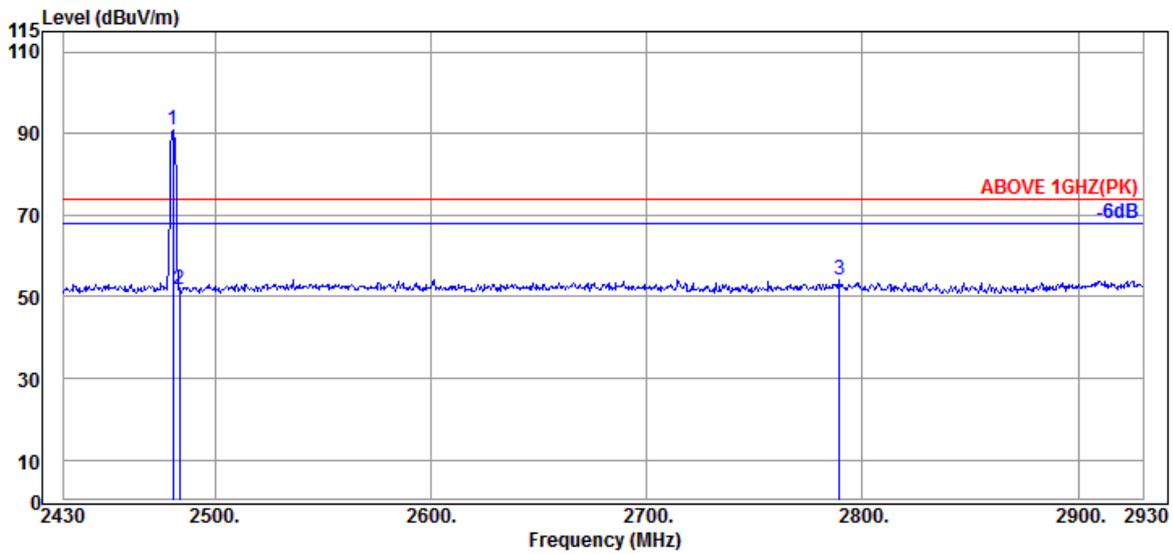

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	85.11	90.85	---	---	Peak
2483.500	32.30	7.99	34.55	45.98	51.72	74.00	22.28	Peak
2789.500	32.37	8.14	34.62	48.43	54.32	74.00	19.68	Peak

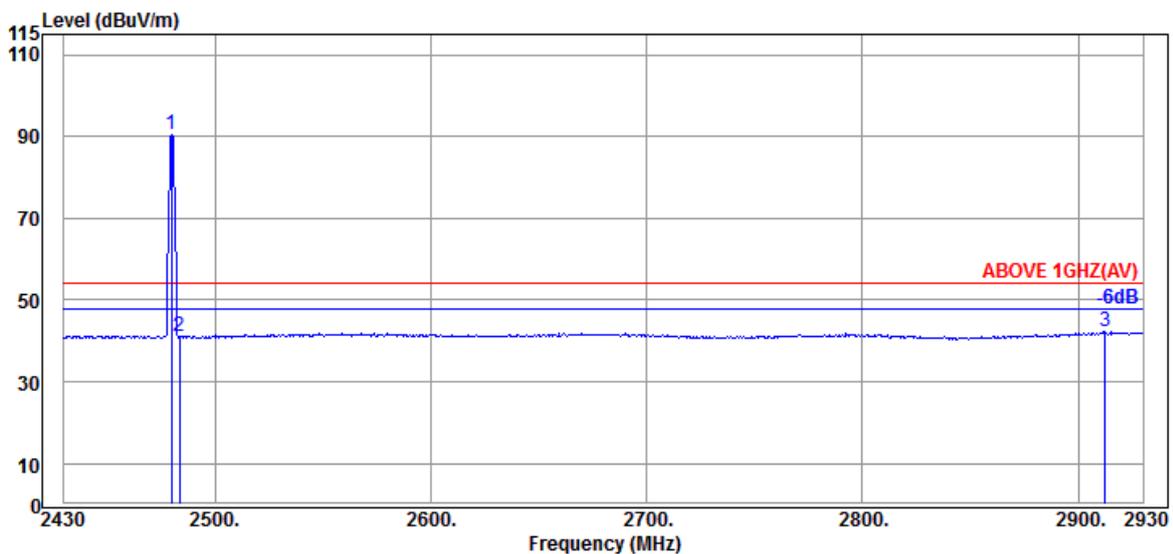


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	84.91	90.65	---	---	Average
2483.500	32.30	7.99	34.55	35.25	40.99	54.00	13.01	Average
2912.500	32.83	8.18	34.64	35.80	42.17	54.00	11.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

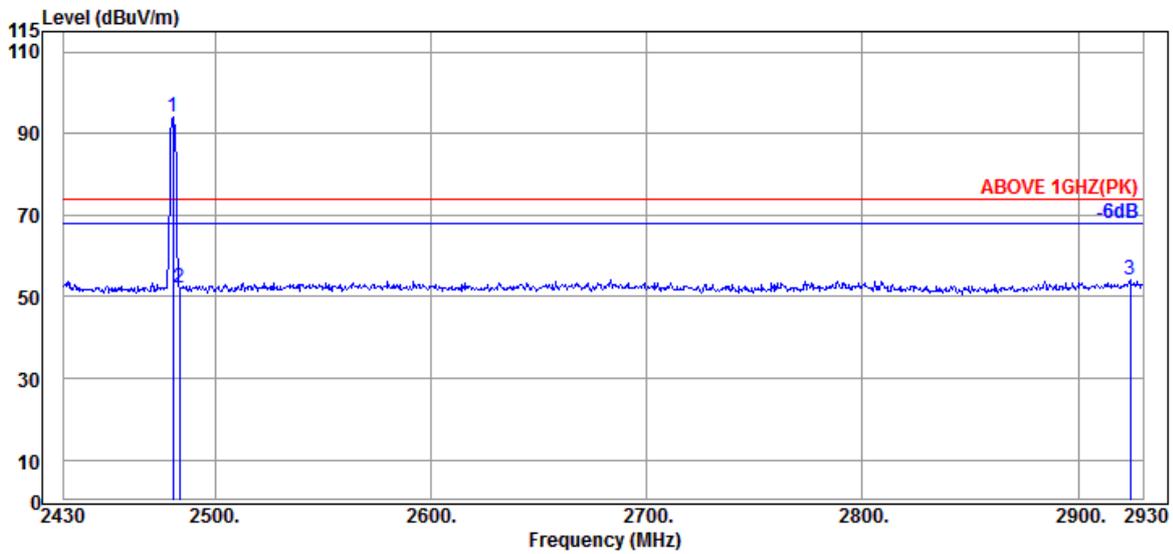

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	88.24	93.98	---	---	Peak
2483.500	32.30	7.99	34.55	46.26	52.00	74.00	22.00	Peak
2924.000	32.90	8.19	34.64	47.52	53.97	74.00	20.03	Peak

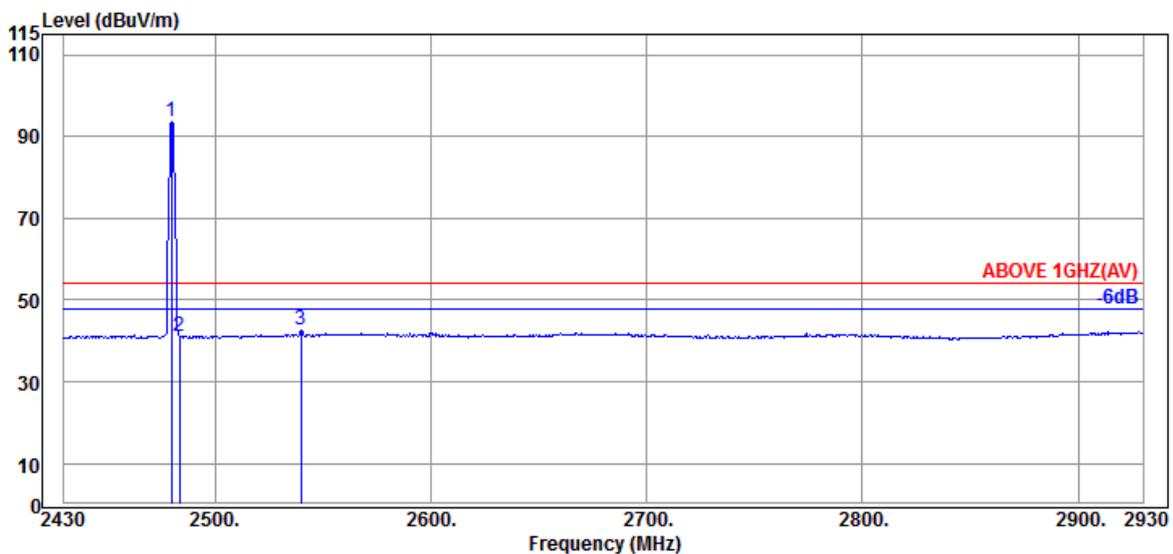


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	88.00	93.74	---	---	Average
2483.500	32.30	7.99	34.55	35.18	40.92	54.00	13.08	Average
2540.000	32.47	8.02	34.57	36.59	42.51	54.00	11.49	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

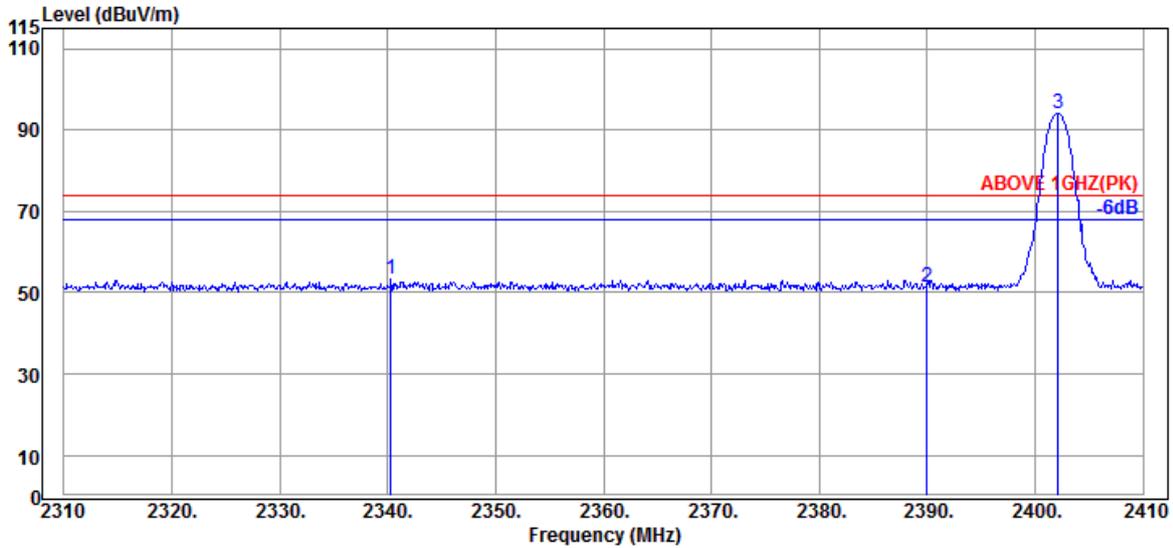

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.300	32.05	7.92	34.53	47.73	53.17	74.00	20.83	Peak
2390.000	31.89	7.95	34.54	45.93	51.23	74.00	22.77	Peak
@ 2402.100	31.80	7.95	34.54	88.82	94.03	---	---	Peak

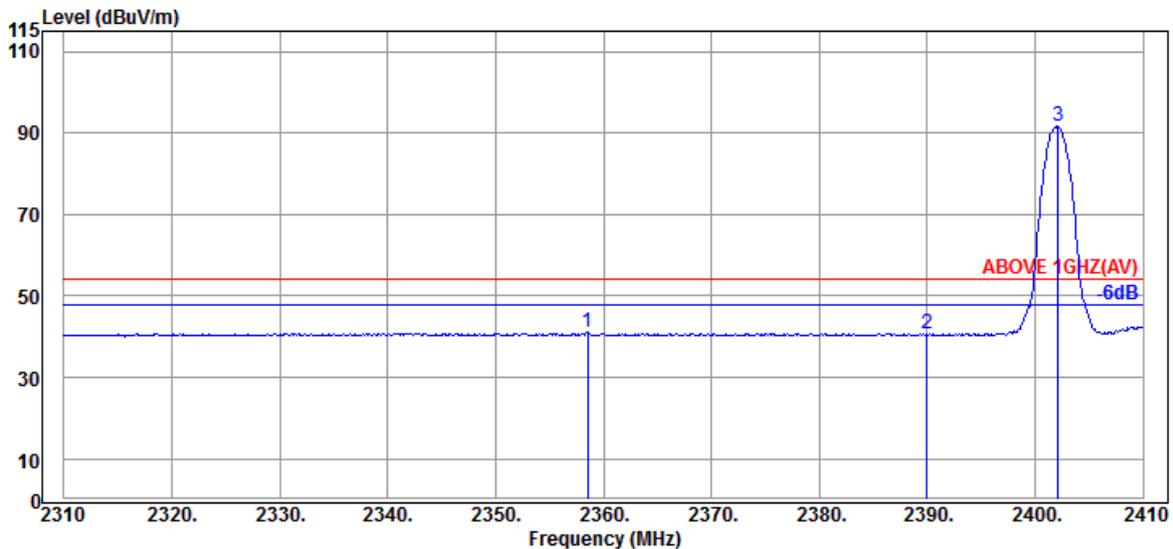


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.500	32.06	7.93	34.53	35.57	41.03	54.00	12.97	Average
2390.000	31.89	7.95	34.54	35.41	40.71	54.00	13.29	Average
@ 2402.100	31.80	7.95	34.54	86.40	91.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

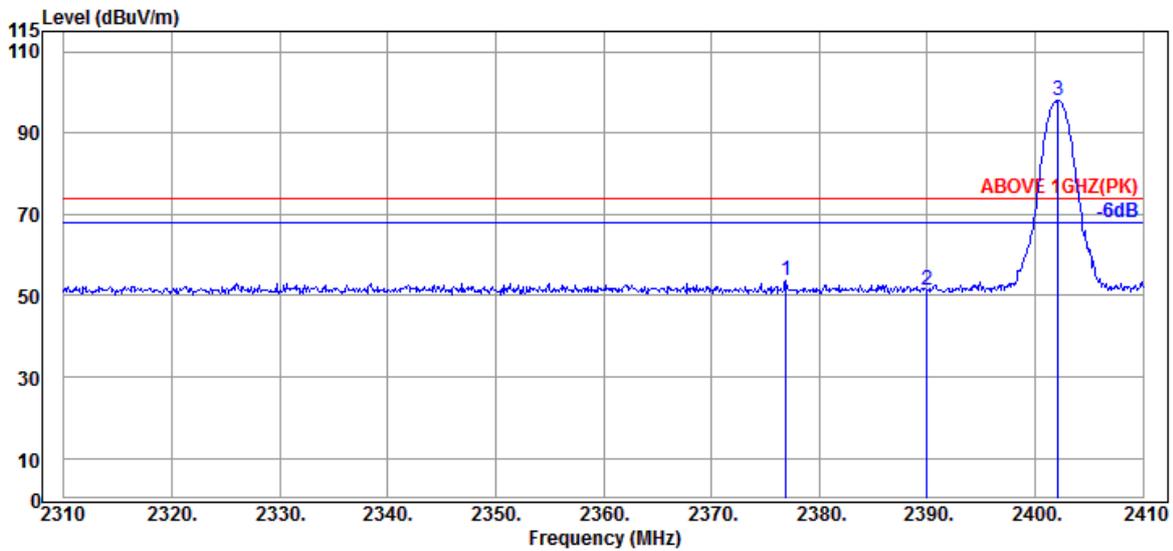

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.900	31.93	7.95	34.53	48.20	53.55	74.00	20.45	Peak
2390.000	31.89	7.95	34.54	46.11	51.41	74.00	22.59	Peak
@ 2402.100	31.80	7.95	34.54	92.76	97.97	---	---	Peak

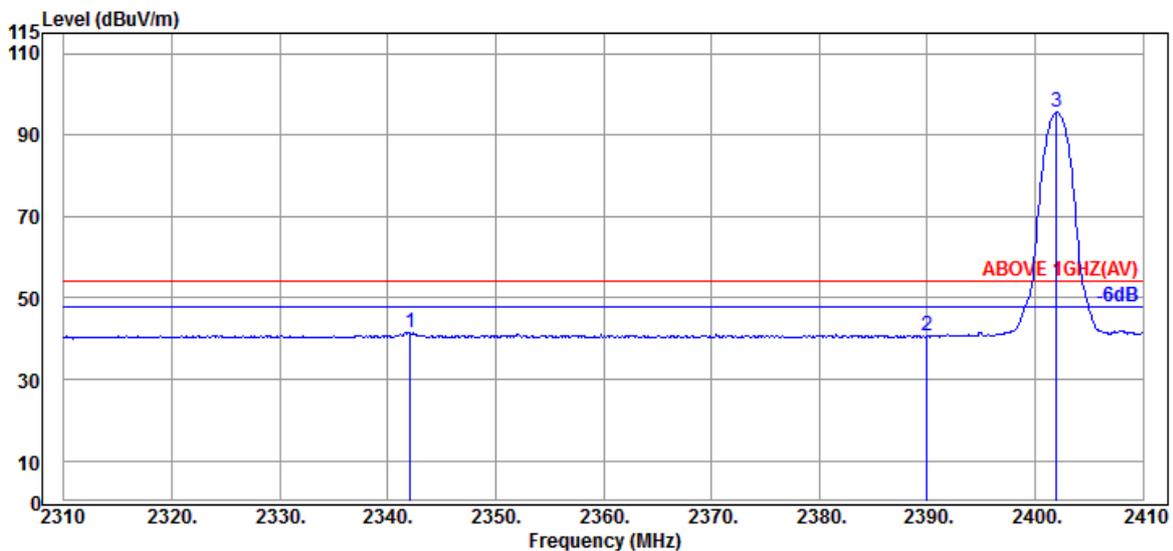


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.05	7.92	34.53	36.05	41.49	54.00	12.51	Average
2390.000	31.89	7.95	34.54	35.26	40.56	54.00	13.44	Average
@ 2402.000	31.80	7.95	34.54	90.25	95.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

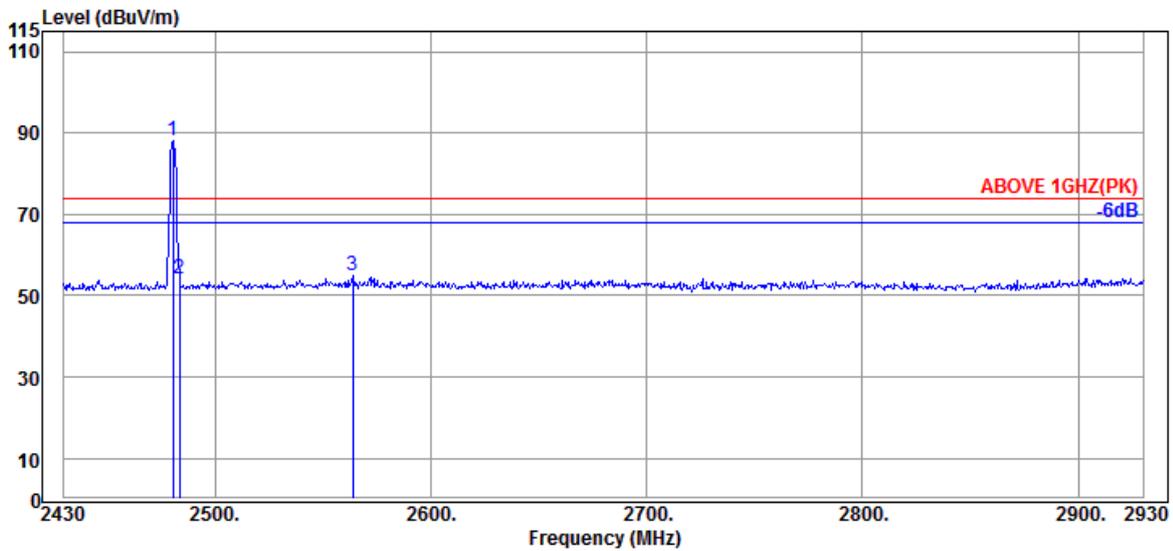

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	82.37	88.11	---	---	Peak
2483.500	32.30	7.99	34.55	48.34	54.08	74.00	19.92	Peak
2564.000	32.50	8.03	34.57	49.02	54.98	74.00	19.02	Peak

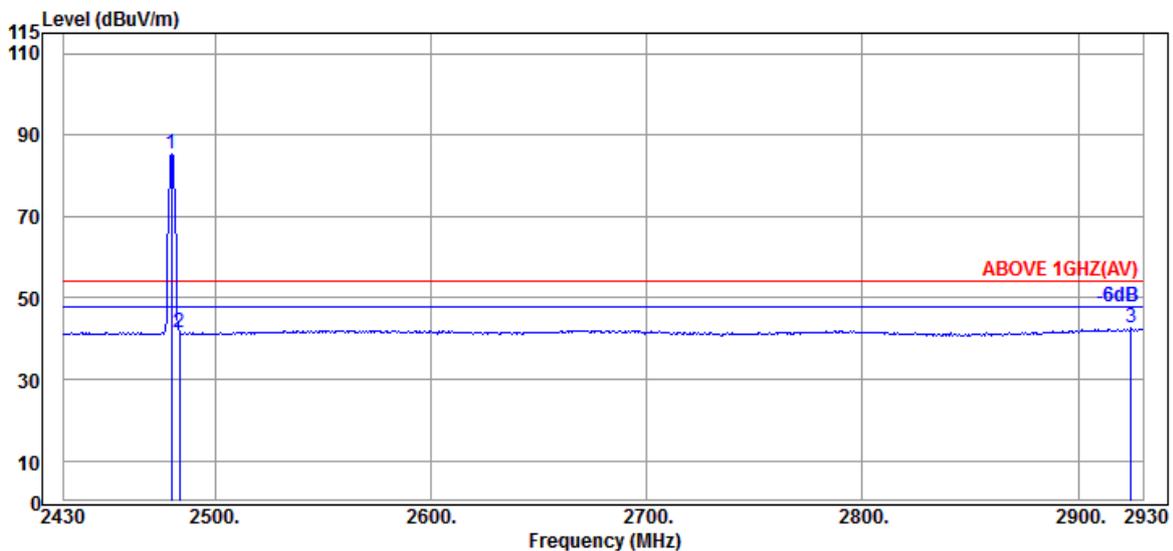


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	79.74	85.48	---	---	Average
2483.500	32.30	7.99	34.55	35.68	41.42	54.00	12.58	Average
2924.500	32.90	8.19	34.64	36.11	42.56	54.00	11.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

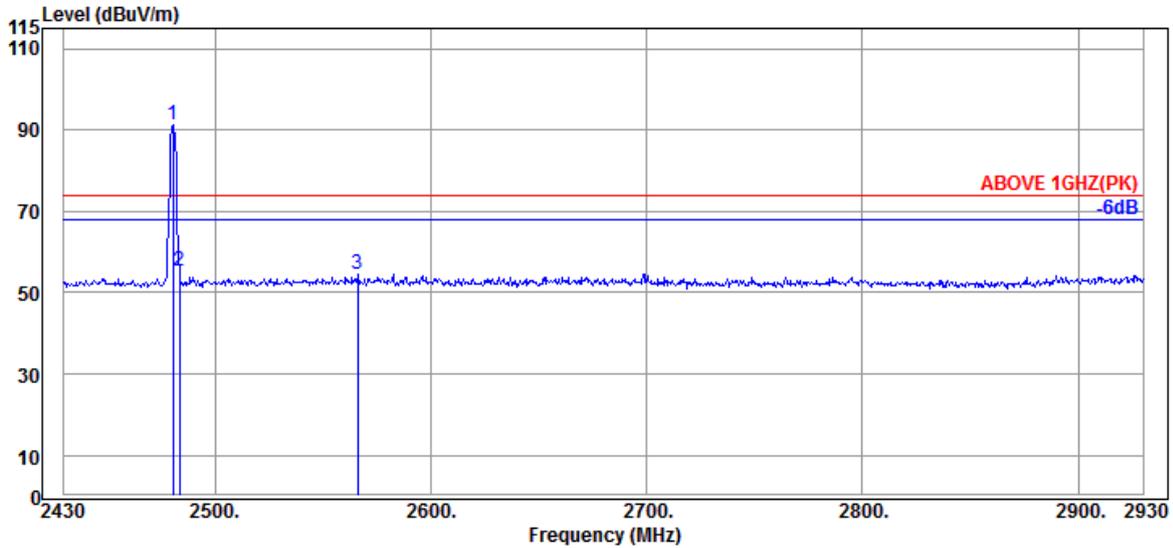

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	85.61	91.35	---	---	Peak
2483.500	32.30	7.99	34.55	49.69	55.43	74.00	18.57	Peak
2566.000	32.50	8.03	34.57	48.63	54.59	74.00	19.41	Peak

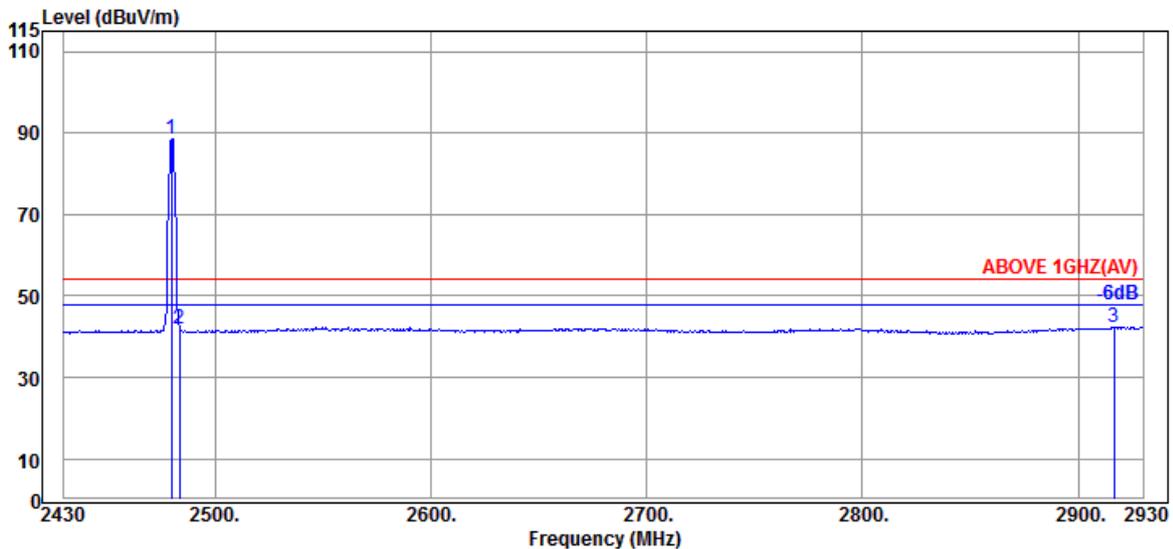

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	82.97	88.71	---	---	Average
2483.500	32.30	7.99	34.55	36.30	42.04	54.00	11.96	Average
2916.500	32.83	8.18	34.64	36.11	42.48	54.00	11.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.90	42.55	54.00	11.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	33.79	43.44	54.00	10.56	Peak

Mode	GFSK	Frequency	TX 2441MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.88	10.54	34.43	32.11	42.10	54.00	11.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.88	10.54	34.43	31.84	41.83	54.00	12.17	Peak

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	32.36	42.38	54.00	11.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	31.69	41.71	54.00	12.29	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH


Test Date	2019/09/18	Temp./Hum.	25°C/51%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 20dB Bandwidth Result

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.9217	0.86410	0.614
	2441	0.9232	0.86892	0.615
	2480	0.9220	0.86466	0.615
8-DPSK	2402	1.386	1.3581	0.924
	2441	1.386	1.3566	0.924
	2480	1.389	1.3547	0.926


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


A.3.2 Measurement Plots

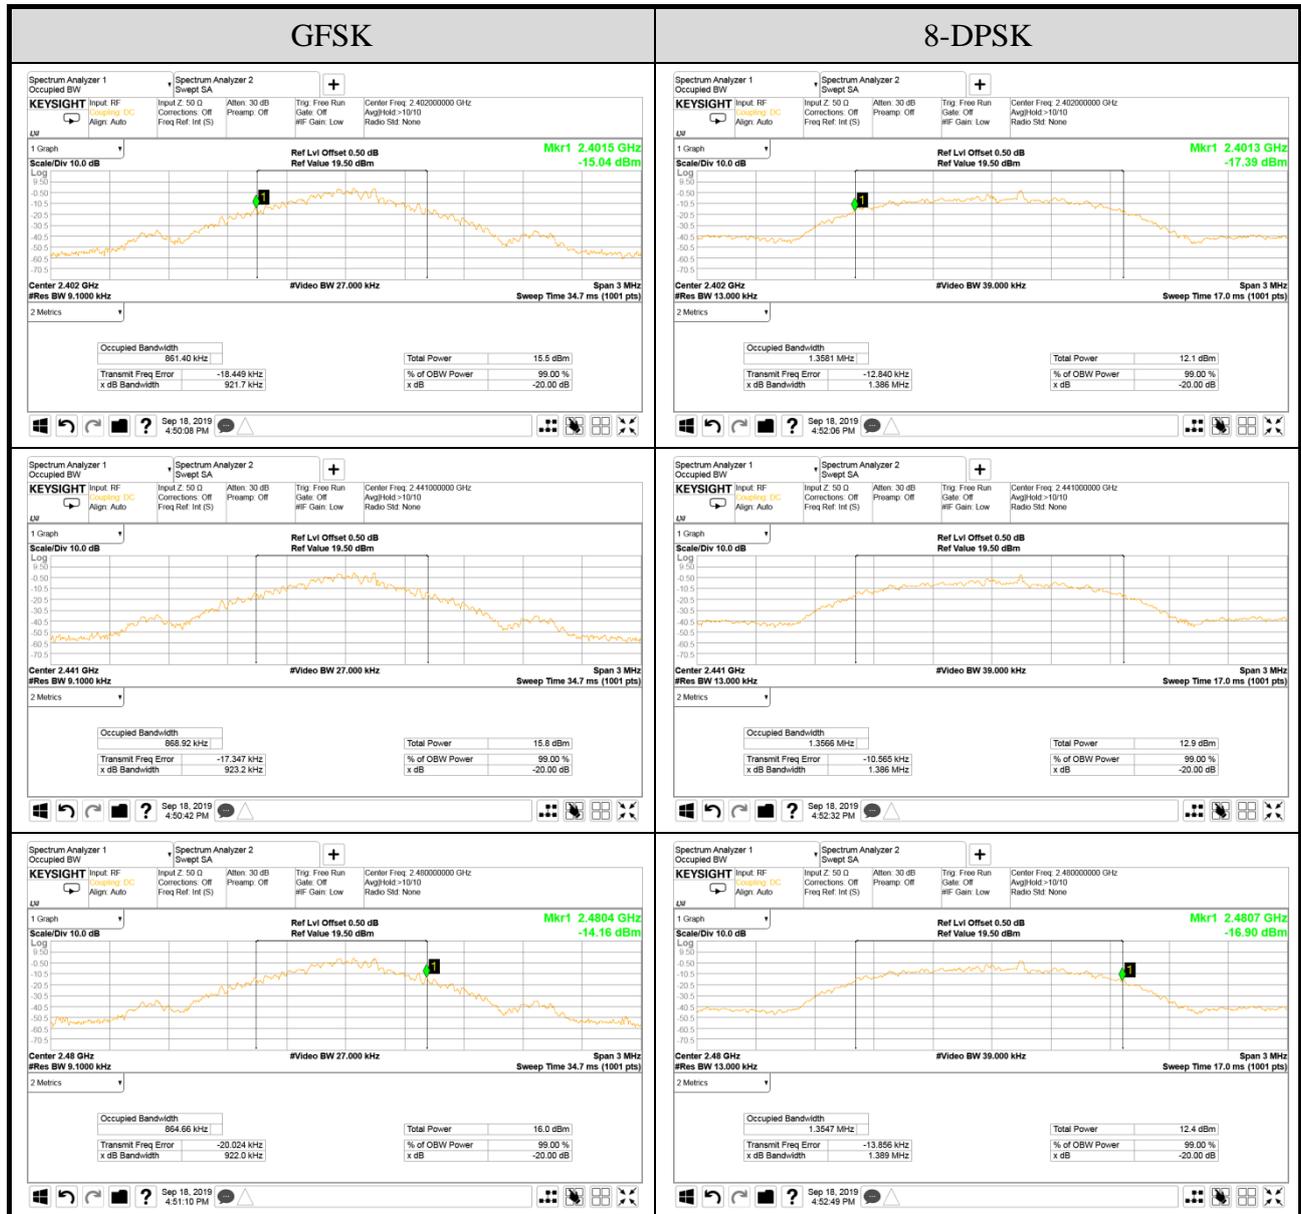

A.4 CARRIER FREQUENCY SEPARATION

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

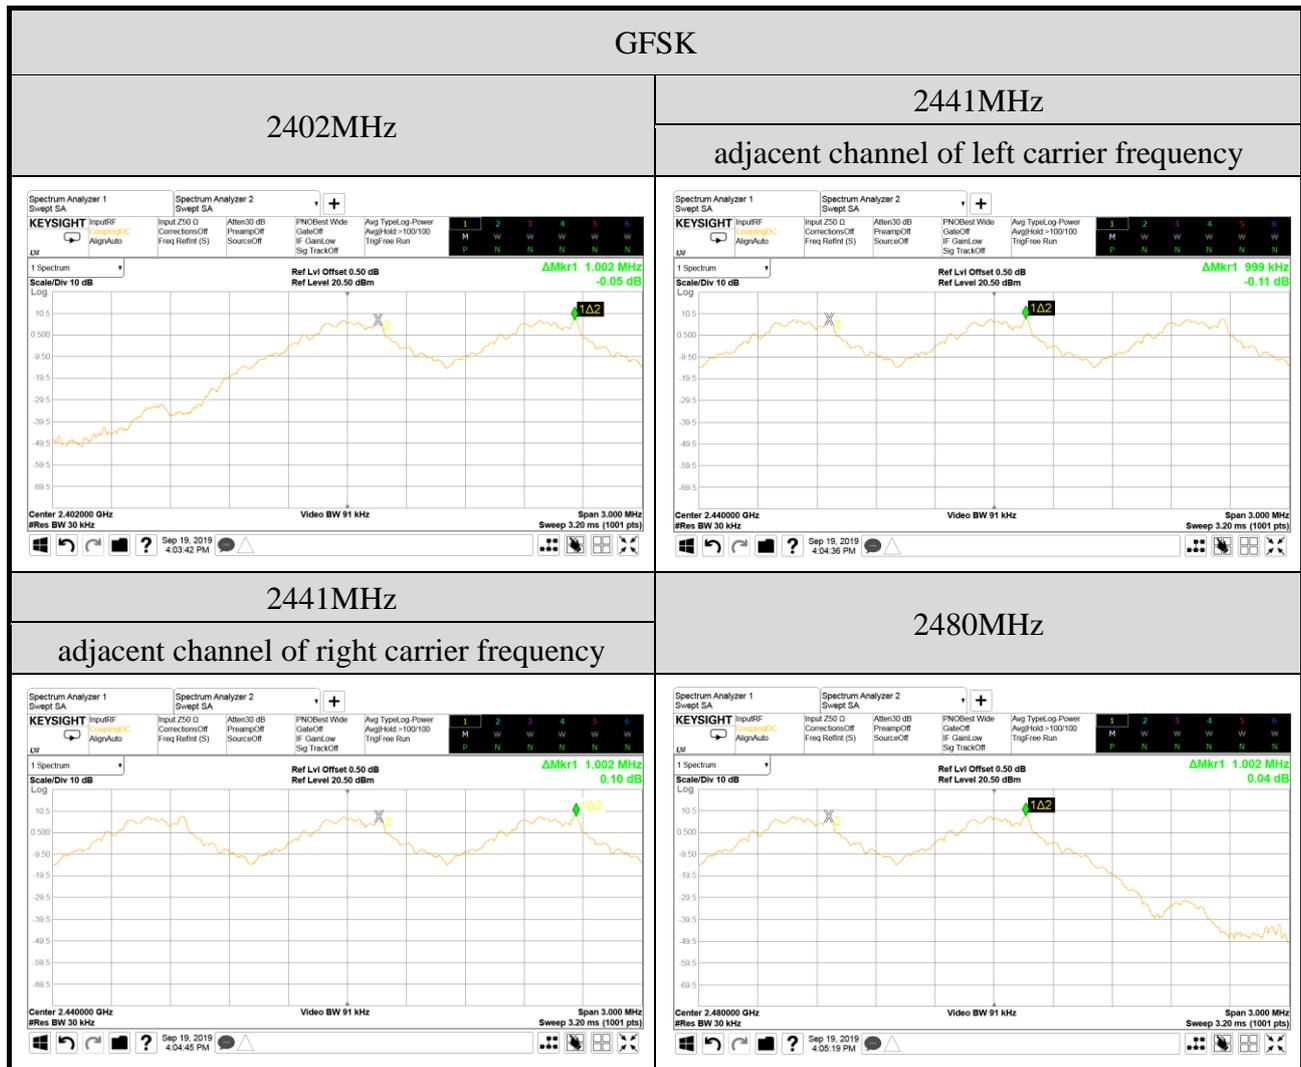

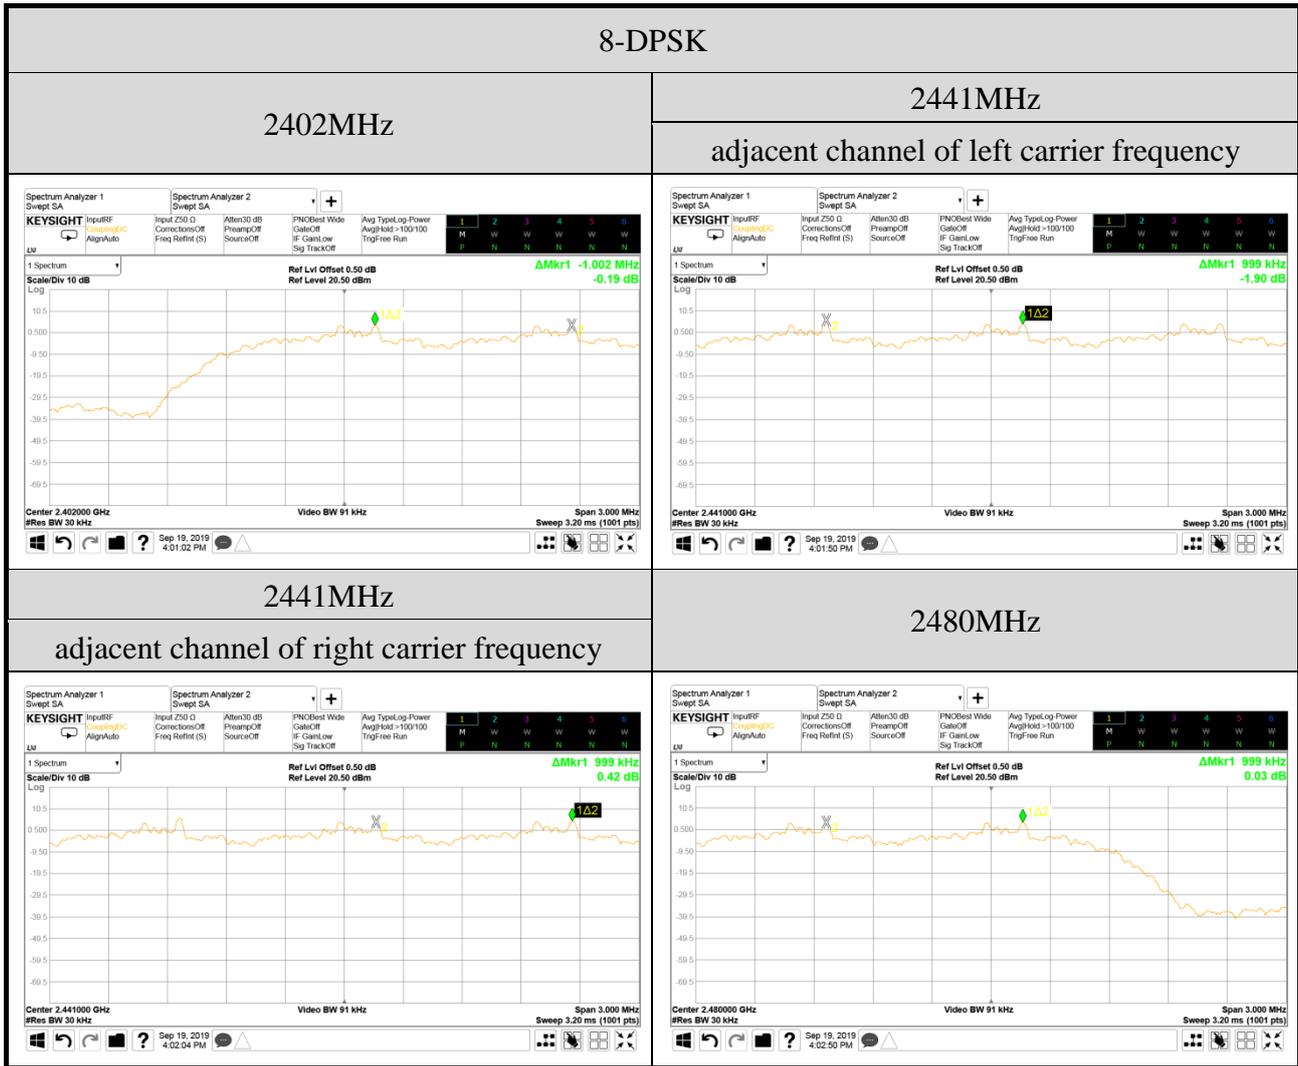

A.5 TIME OF OCCUPANCY

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.380	120.080	<400
		DH3	5	1.635	258.330	<400
		DH5	3	2.880	273.024	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 2.880 ms = 273.024 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2440	DH1	10	0.380	120.080	<400
		DH3	5	1.635	258.330	<400
		DH5	3	2.880	273.024	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 2.880 ms = 273.024 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.380	120.080	<400
		DH3	5	1.635	258.330	<400
		DH5	3	2.880	273.024	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.380** ms = **120.080** ms (<400ms)


DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
5 transmission * **31.6** seconds * **1.635** ms = **258.330** ms (<400ms)

DH5 Mode


For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * **31.6** seconds * **2.880** ms = **273.024** ms (<400ms)

● Measurement Plots

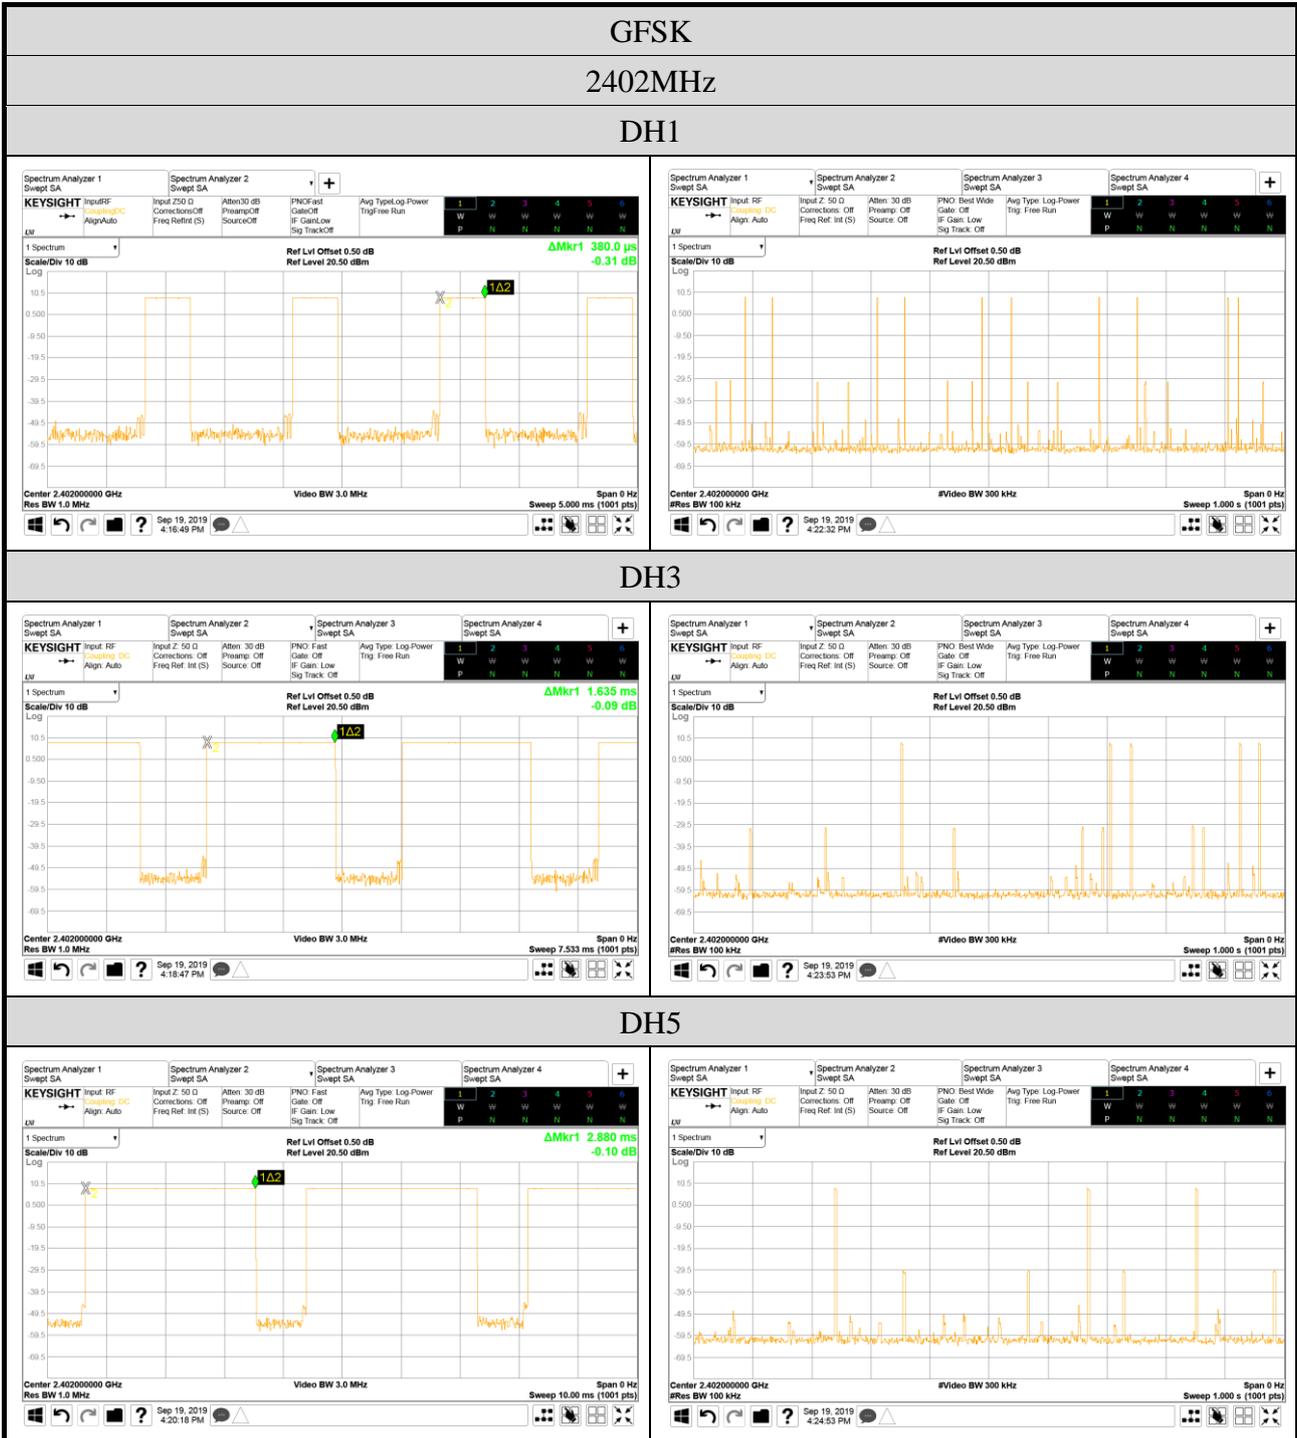


GFSK
2441MHz


DH1

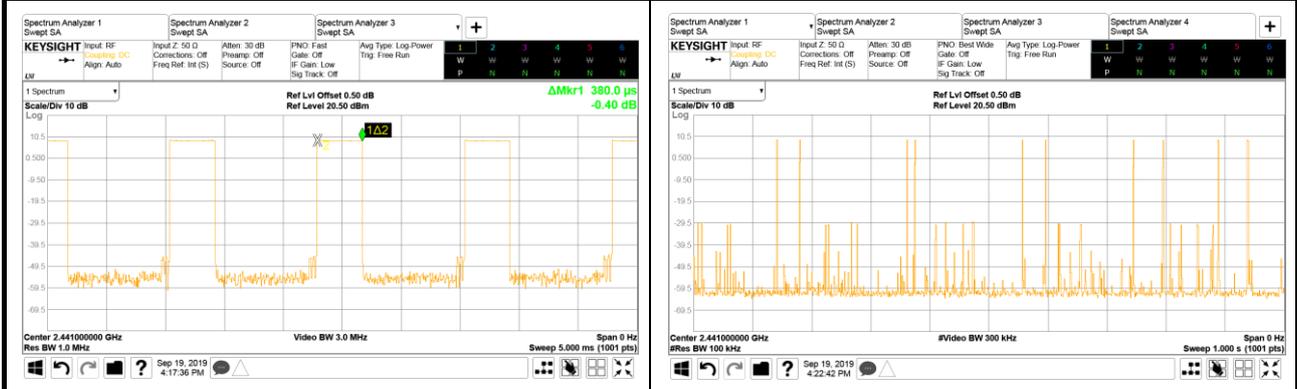

DH3

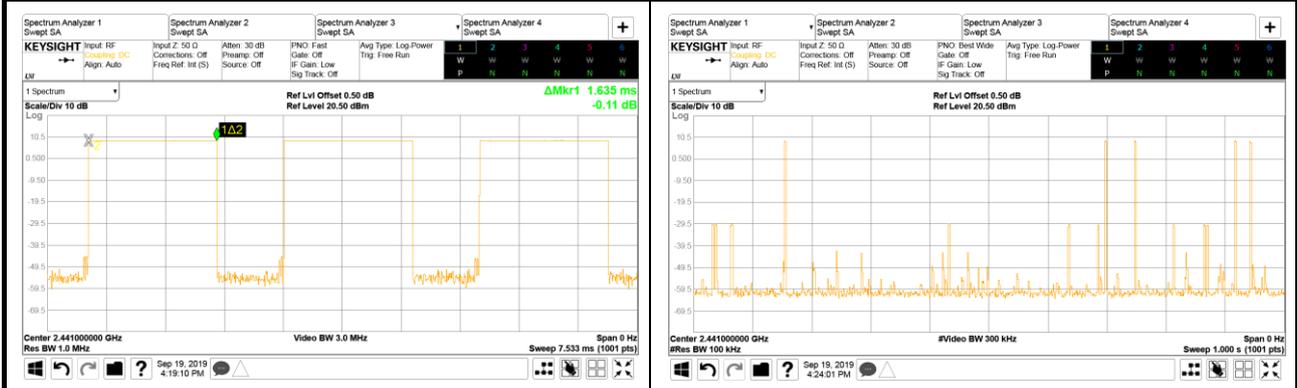


DH5

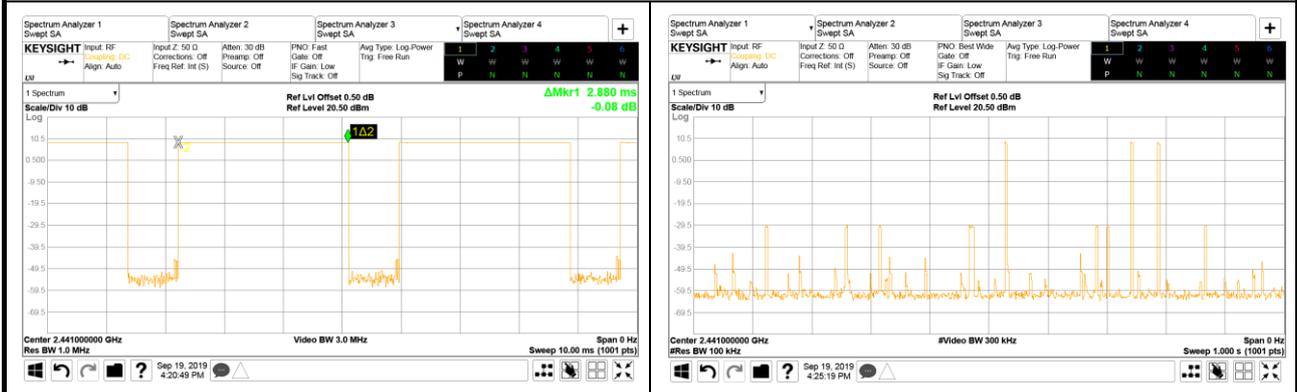


GFSK
 2480MHz

DH1

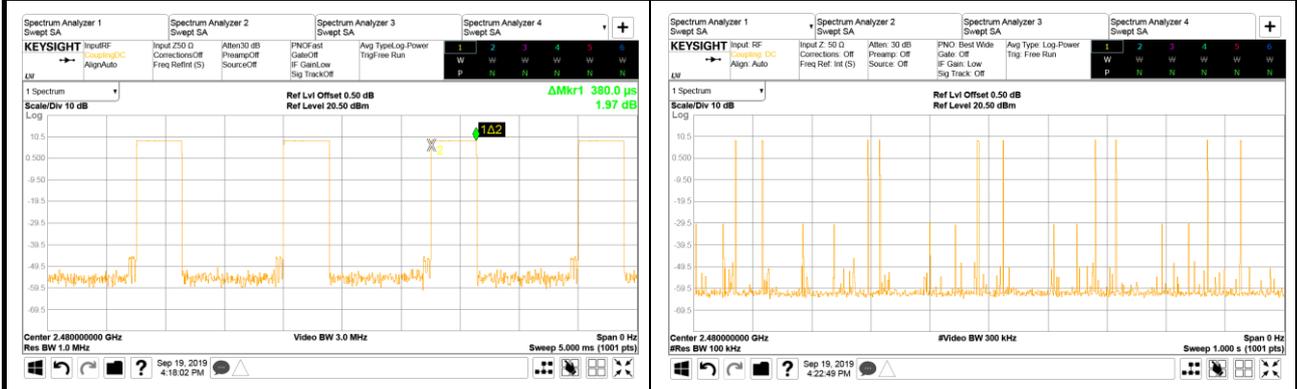

DH3

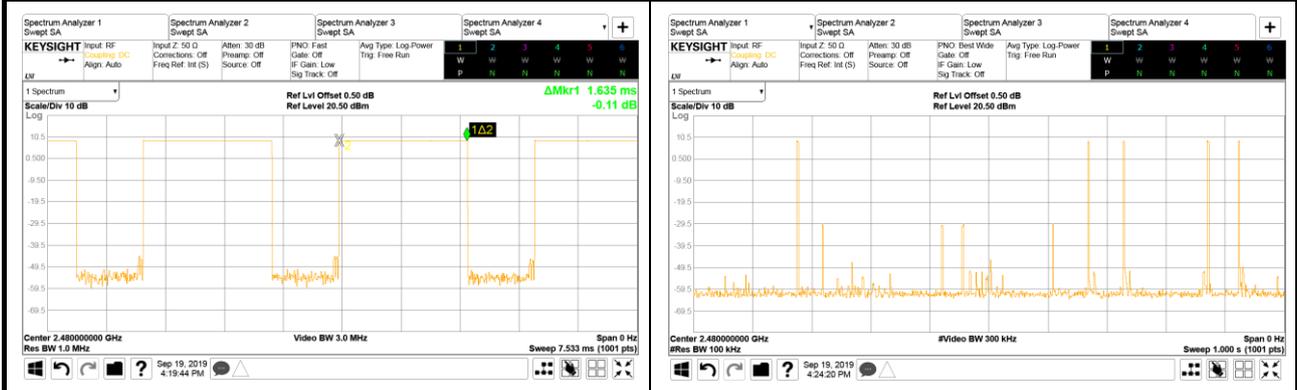

DH5



Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.390	123.240	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.890	273.972	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
 $10 \text{ transmission} * 31.6 \text{ seconds} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
 $5 \text{ transmission} * 31.6 \text{ seconds} * 1.635 \text{ ms} = 258.330 \text{ ms} (<400\text{ms})$

3DH5 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
 $3 \text{ transmission} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.390	123.240	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.890	273.972	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
 $10 \text{ transmission} * 31.6 \text{ seconds} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
 $5 \text{ transmission} * 31.6 \text{ seconds} * 1.635 \text{ ms} = 258.330 \text{ ms} (<400\text{ms})$

3DH5 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
 $3 \text{ transmission} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.390	123.240	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.890	273.972	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.390** ms = **123.240** ms (<400ms)


3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
5 transmission * **31.6** seconds * **1.635** ms = **258.330** ms (<400ms)

3DH5 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * **31.6** seconds * **2.890** ms = **273.972** ms (<400ms)


● Measurement Plots

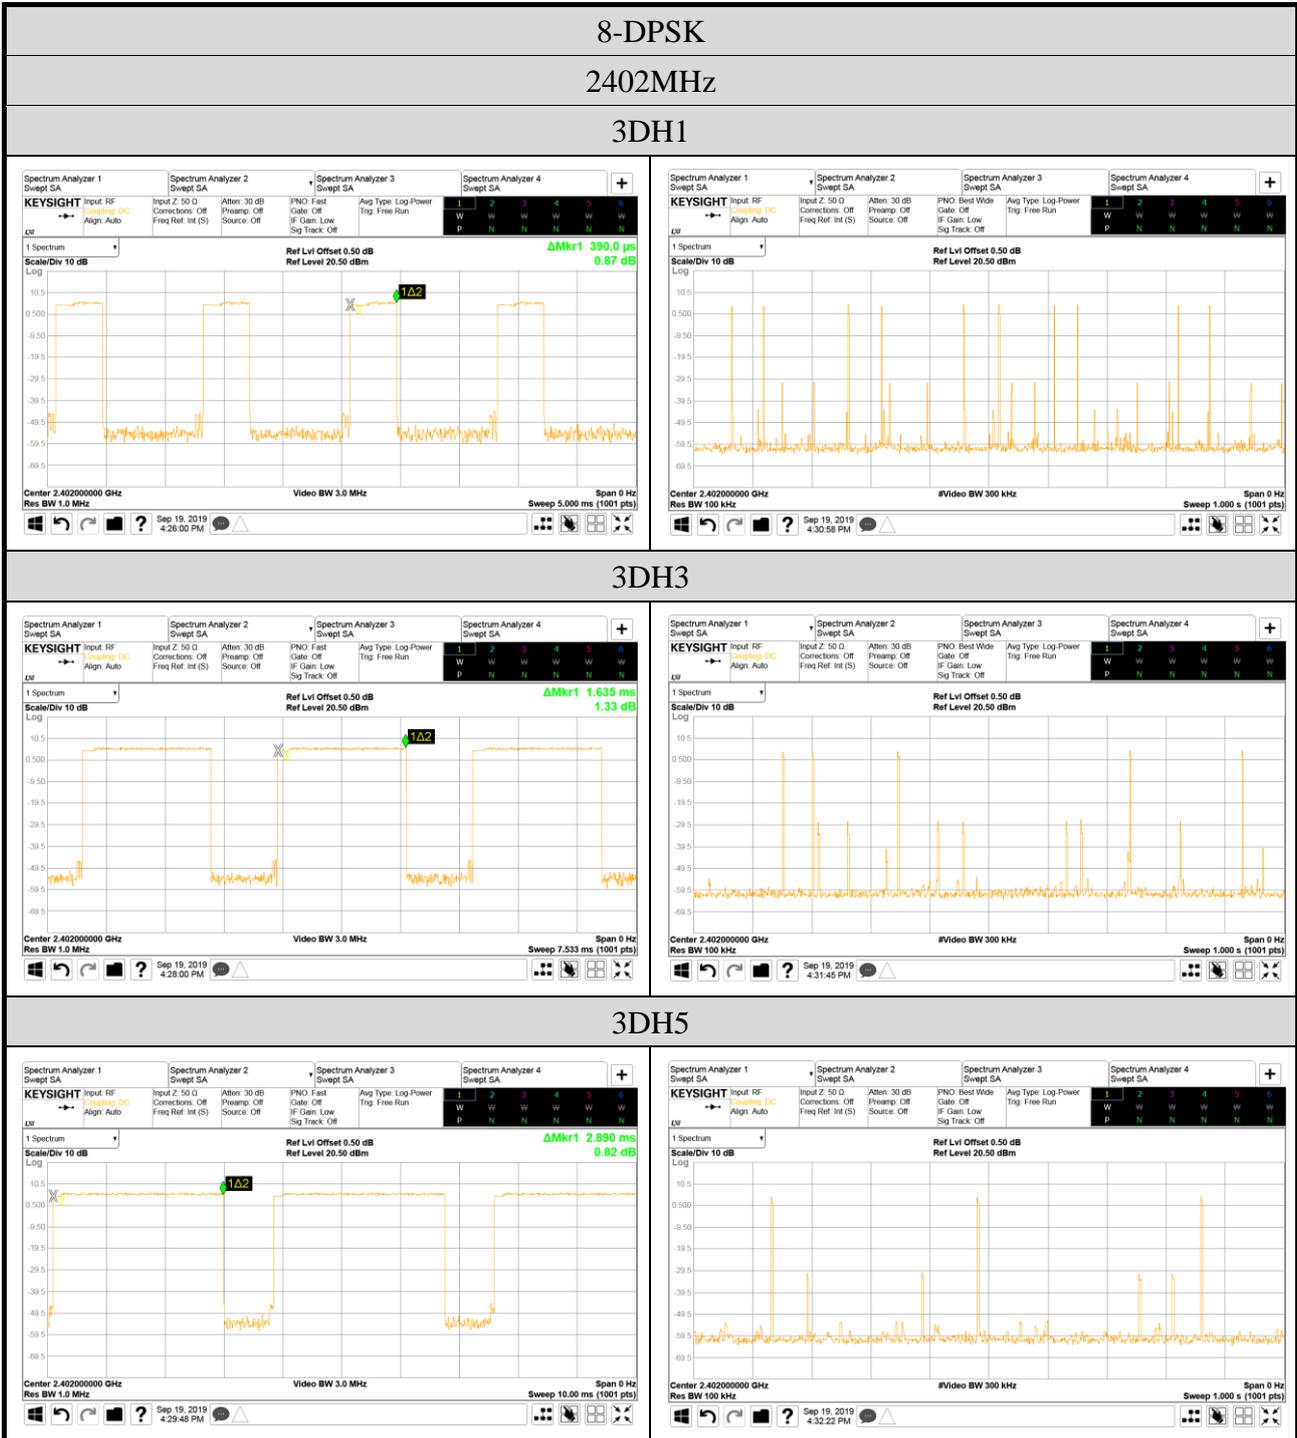


8-DPSK

2441MHz


3DH1

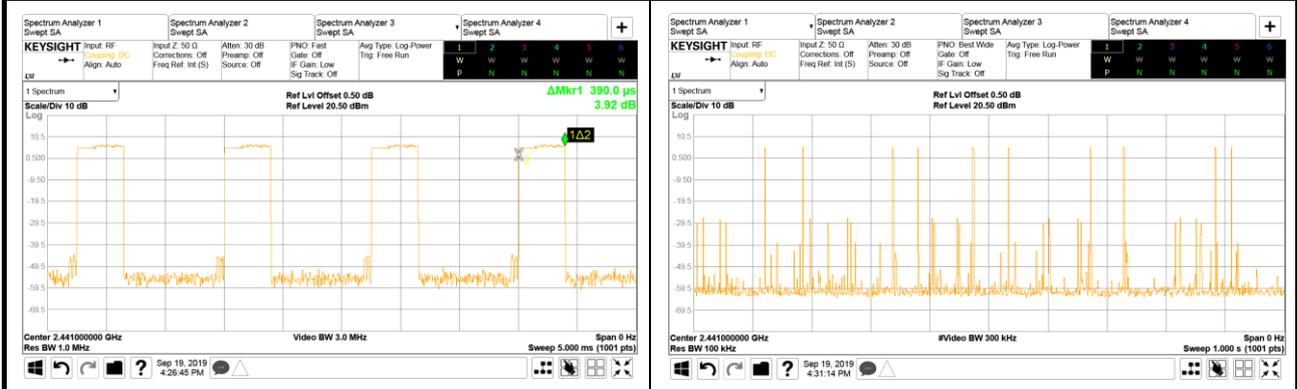

3DH3

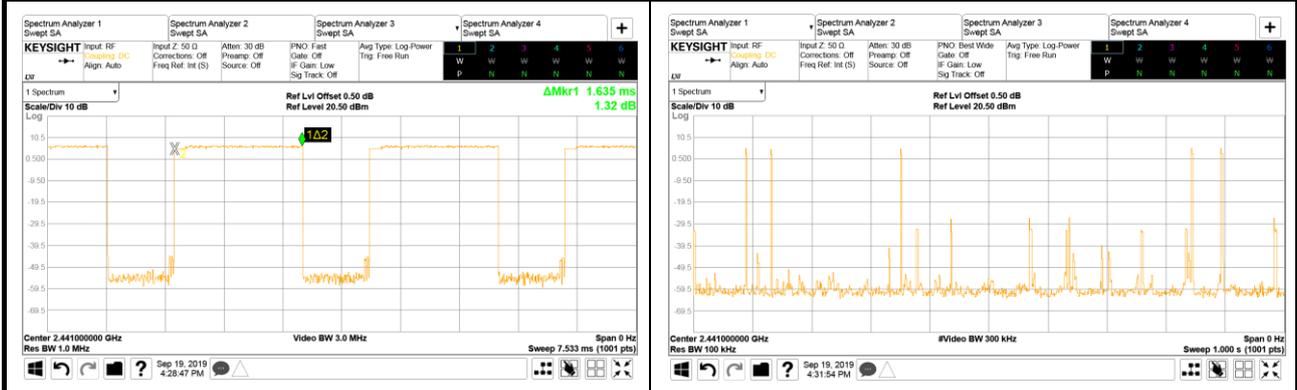

3DH5

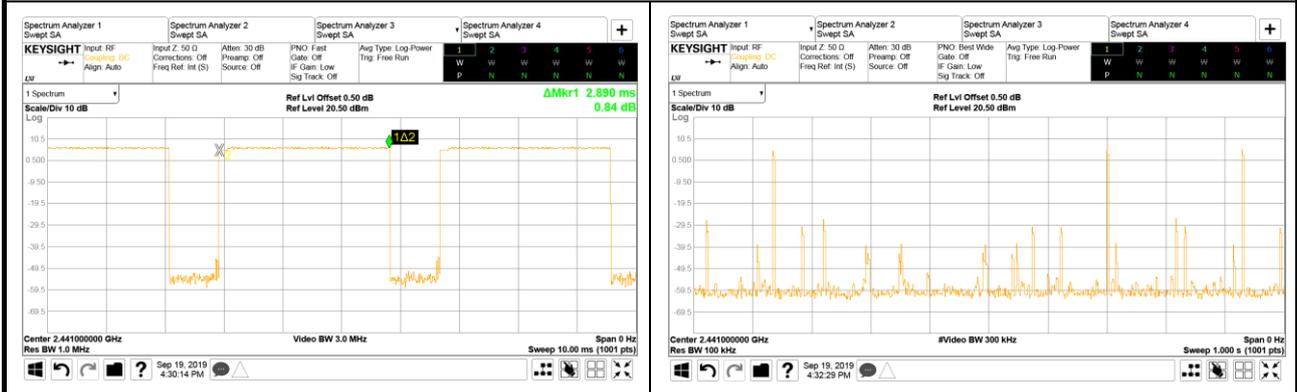

8-DPSK

2480MHz

3DH1



3DH3



3DH5



A.6 NUMBER OF HOPPING CHANNELS

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

Mode: GFSK	Mode: 8-DPSK																																																
<p>Mode: GFSK</p> <p>Spectrum Analyzer 1 Sweep SA</p> <p>KEYSIGHT Input RF Input Z: 50 Ω Attenu: 30 dB PNO: Fast Corrections: Off Avg Type: Log-Power</p> <p>Scale/Div 10 dB Ref Lvl Offset 0.50 dB Mkr2 2.483 6 GHz -53.95 dBm</p> <p>Center 2.44100 GHz #Video BW 300 kHz Span 100.0 MHz #Res BW 100 kHz Sweep 9.60 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.399 9 GHz</td> <td>-46.95 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>2.483 6 GHz</td> <td>-53.95 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	f	2.399 9 GHz	-46.95 dBm				2	N	f	2.483 6 GHz	-53.95 dBm				<p>Mode: 8-DPSK</p> <p>Spectrum Analyzer 1 Sweep SA</p> <p>KEYSIGHT Input RF Input Z: 50 Ω Attenu: 30 dB PNO: Fast Corrections: Off Avg Type: Log-Power</p> <p>Scale/Div 10 dB Ref Lvl Offset 0.50 dB Mkr2 2.483 6 GHz -52.81 dBm</p> <p>Center 2.44100 GHz #Video BW 300 kHz Span 100.0 MHz #Res BW 100 kHz Sweep 9.60 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.399 9 GHz</td> <td>-44.01 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>2.483 6 GHz</td> <td>-52.81 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	f	2.399 9 GHz	-44.01 dBm				2	N	f	2.483 6 GHz	-52.81 dBm			
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																										
1	N	f	2.399 9 GHz	-46.95 dBm																																													
2	N	f	2.483 6 GHz	-53.95 dBm																																													
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																										
1	N	f	2.399 9 GHz	-44.01 dBm																																													
2	N	f	2.483 6 GHz	-52.81 dBm																																													
The number hopping channel is 79.	The number hopping channel is 79.																																																

A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	(1)2019/09/18	Temp./Hum.	(1)25°C/51%
	(2)2021/08/12		(2)24°C/54%
Cable Loss	0.5dB		Tested By
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.7.1 Maximum Peak Output Power

SPOT CHECK

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	8.70	0.007	21dBm (0.125W)
	2441	9.33	0.009	
	2480	9.69	0.009	
8-DPSK	2402	6.60	0.005	
	2441	7.13	0.005	
	2480	7.52	0.006	


Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N.

We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	9.14	0.008	21dBm (0.125W)
	2441	9.59	0.009	
	2480	9.48	0.009	
8-DPSK	2402	6.89	0.005	
	2441	7.55	0.006	
	2480	7.00	0.005	


A.7.2 Measurement Plots

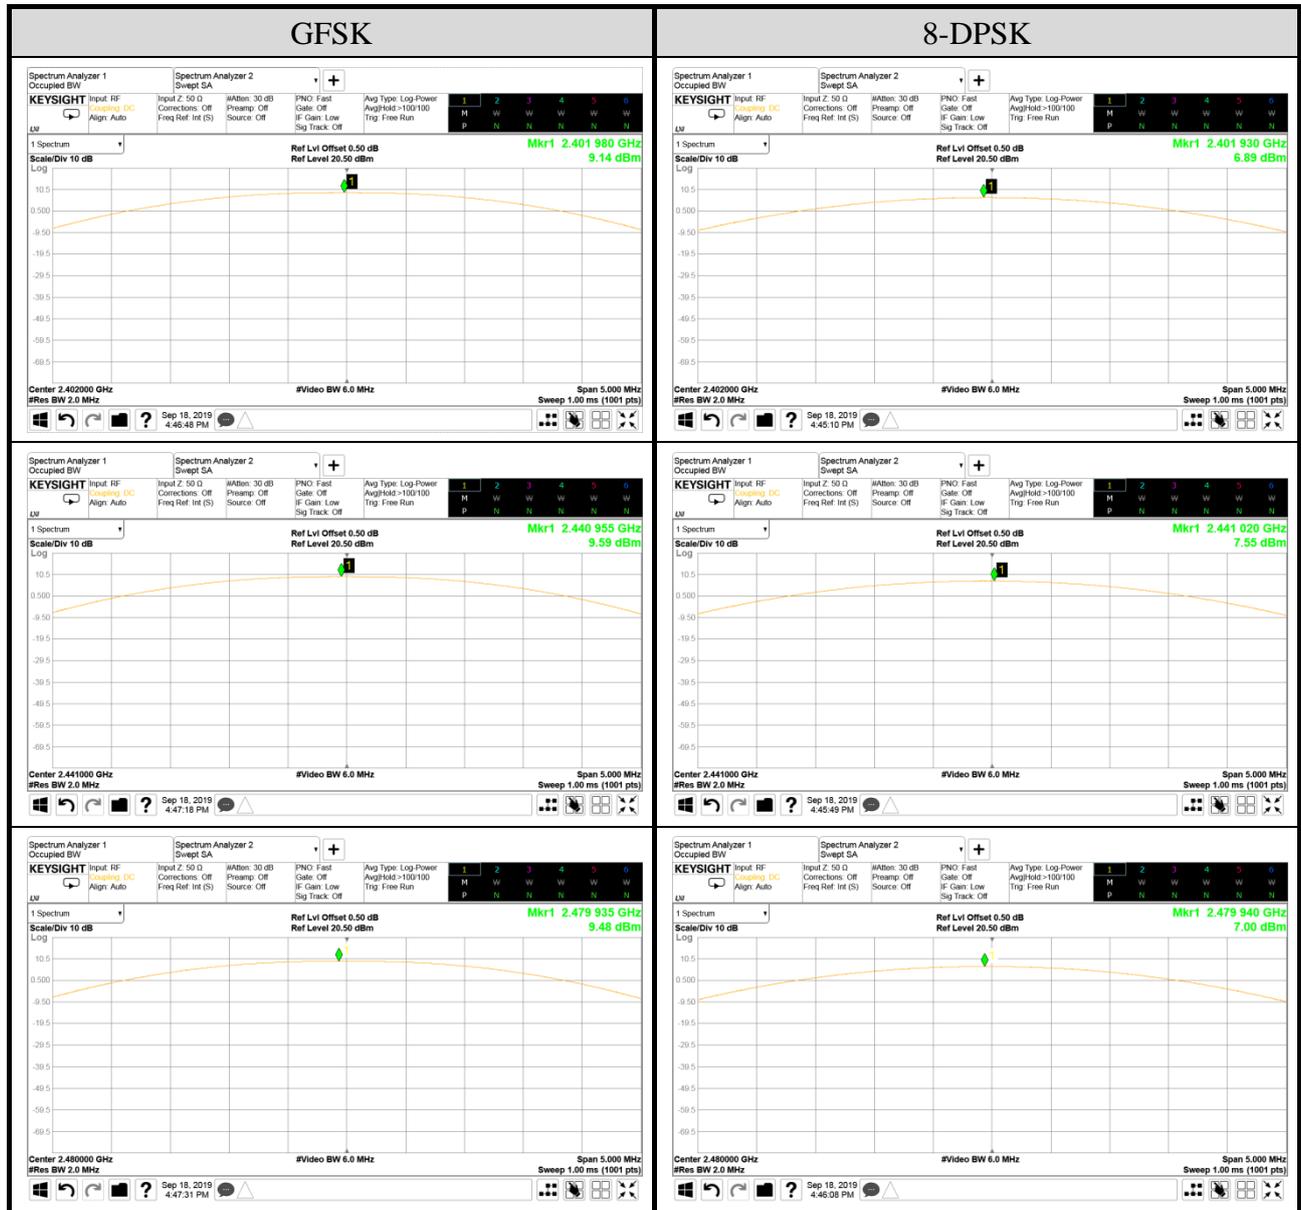

A.8 EMISSION LIMITATIONS MEASUREMENT


Test Date	2019/09/18 ~ 19	Temp./Hum.	25°C/51 ~ 54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.8.1 Band Edge

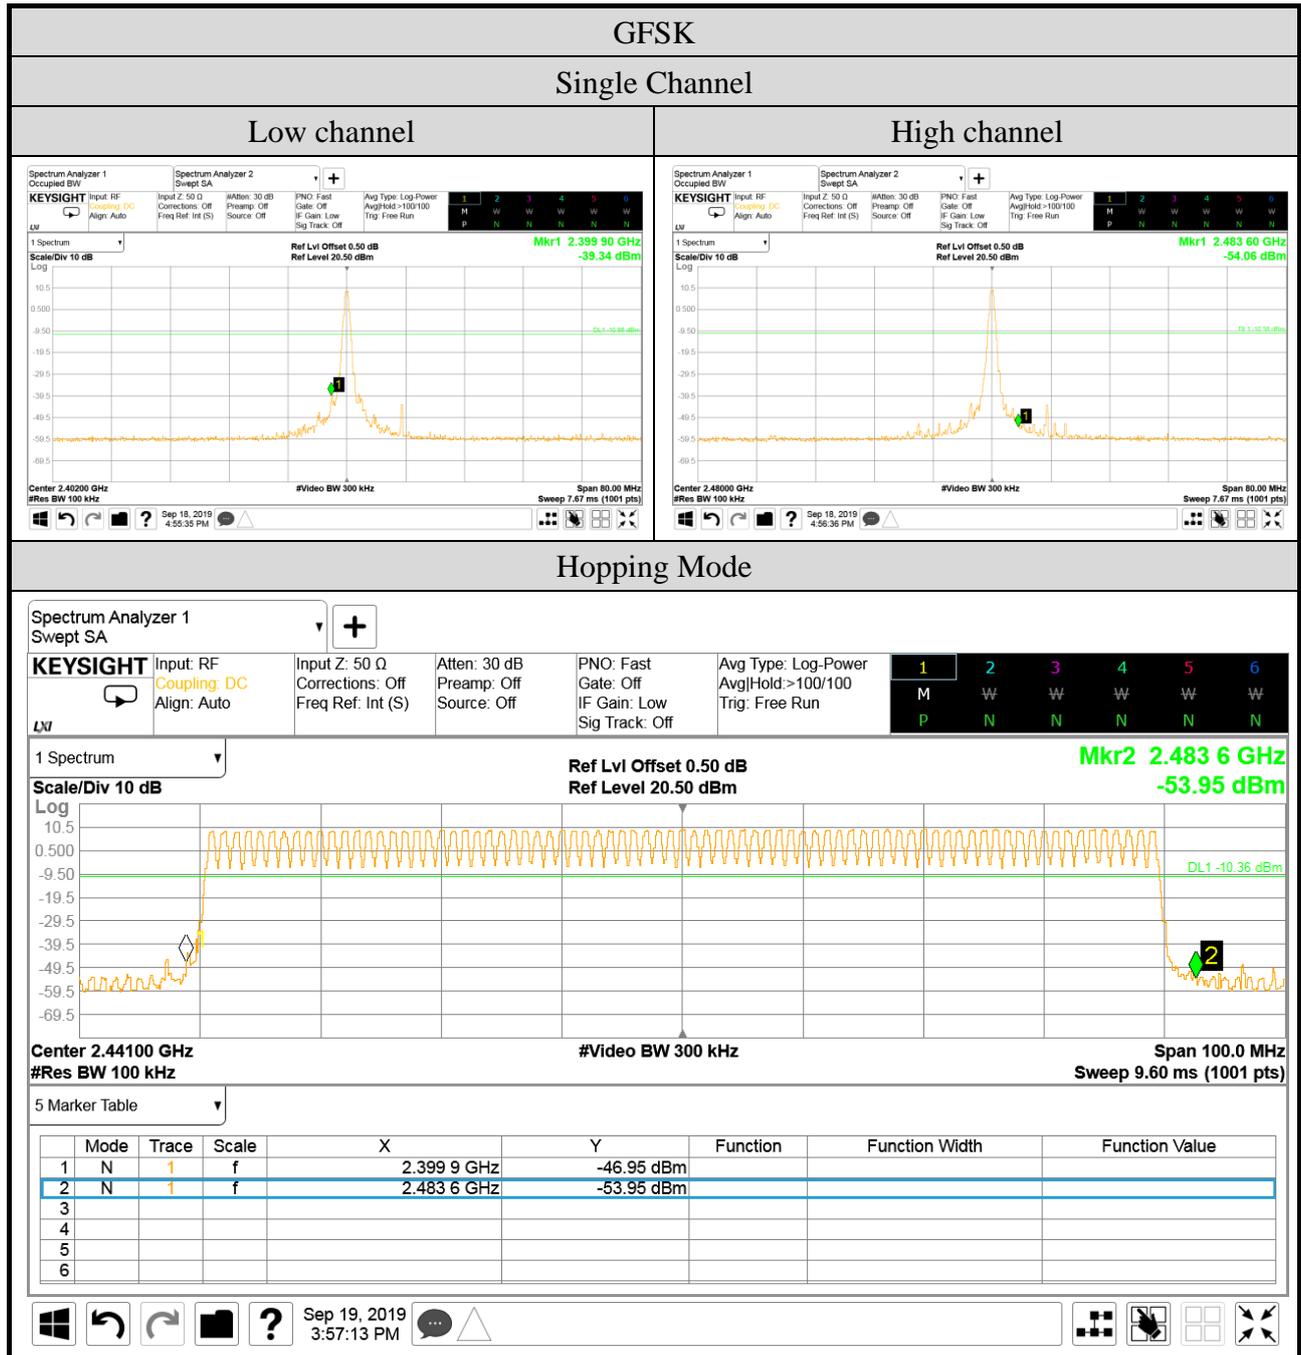

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

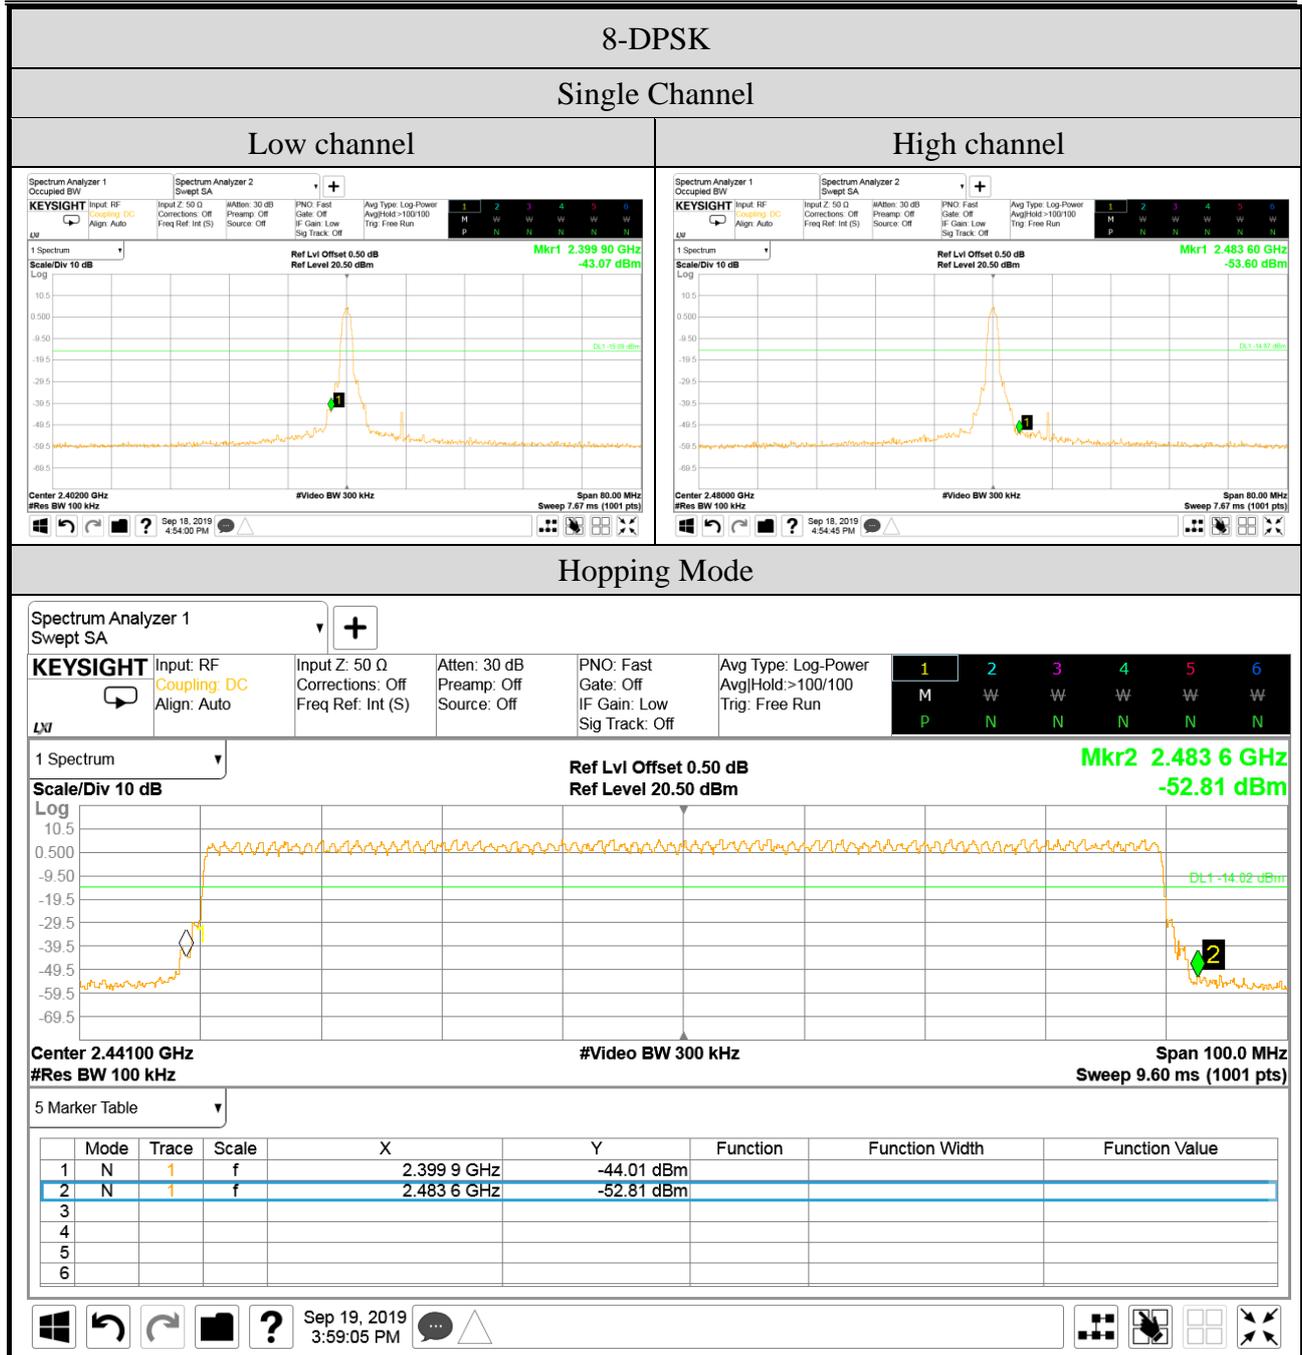

A.8.2 Spurious Emission



Note: All results have been included cable loss.

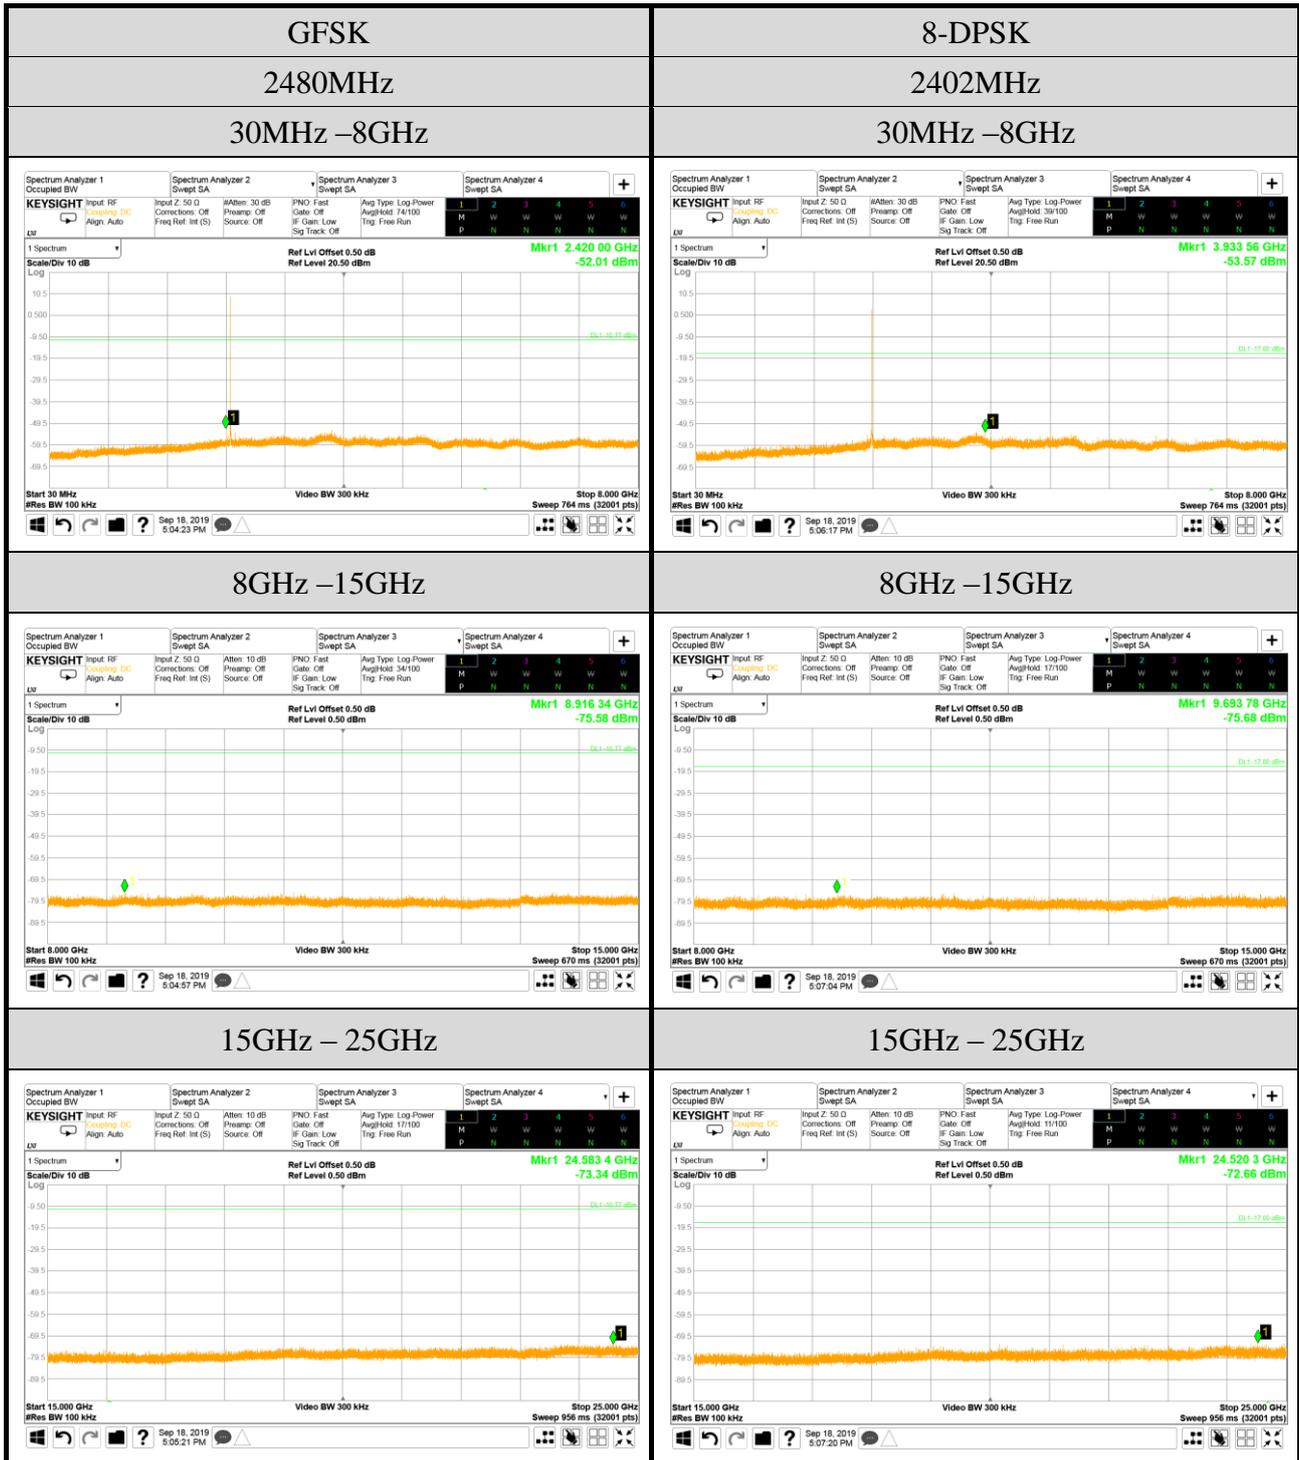

Note: All results have been included cable loss.