

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	100
A.2.3 Emissions in Non-restricted Frequency Bands:.....	102
A.3 6dB OCCUPIED BANDWIDTH	103
A.3.1 Emission Bandwidth Result.....	103
A.3.2 Measurement Plots	105
A.4 MAXIMUM PEAK OUTPUT POWER	111
A.4.1 Peak Output Power	111
A.4.2 Average Output Power (Reporting only).....	120
A.4.3 Measurement Plots	128
A.5 EMISSION LIMITATIONS	130
A.6 POWER SPECTRAL DENSITY	157
A.6.1 Power Spectral Density Result	157
A.6.2 Measurement Plots	159

A.1 CONDUCTED EMISSION

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

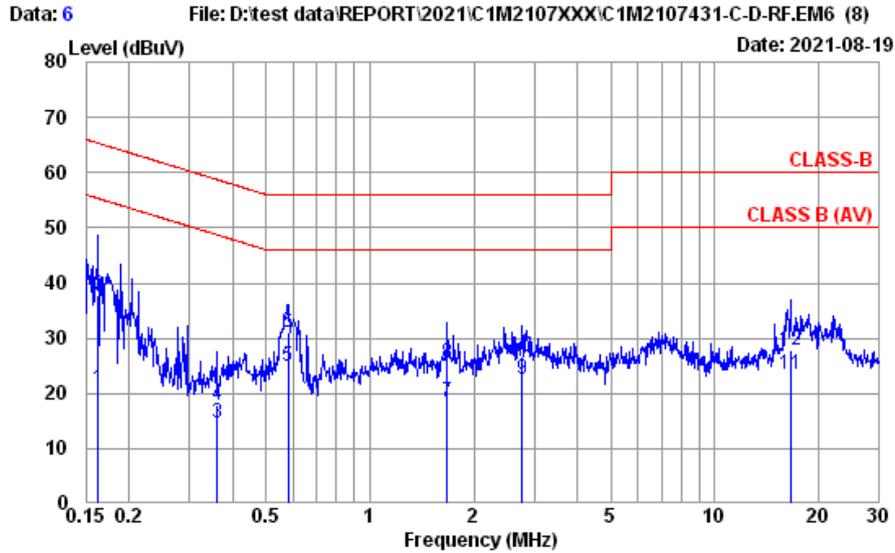


Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 52%	Engineer	: Roy Hung
EUT Model	: 17Z95P	Test Rating	: 120Vac/60
Test Mode	: Operating IHPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	0.41	20.69	55.34	34.65	Average
2	0.162	10.40	0.03	9.85	17.39	37.67	65.34	27.67	QP
3	0.360	10.37	0.03	9.85	-5.72	14.53	48.74	34.21	Average
4	0.360	10.37	0.03	9.85	-2.37	17.88	58.74	40.86	QP
5	0.579	10.37	0.03	9.85	4.63	24.88	46.00	21.12	Average
6	0.579	10.37	0.03	9.85	10.82	31.07	56.00	24.93	QP
7	1.671	10.40	0.05	9.86	-1.79	18.52	46.00	27.48	Average
8	1.671	10.40	0.05	9.86	5.22	25.53	56.00	30.47	QP
9	2.765	10.43	0.07	9.86	2.26	22.62	46.00	23.38	Average
10	2.765	10.43	0.07	9.86	6.20	26.56	56.00	29.44	QP
11	16.573	10.99	0.18	9.92	2.27	23.36	50.00	26.64	Average
12	16.573	10.99	0.18	9.92	6.66	27.75	60.00	32.25	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

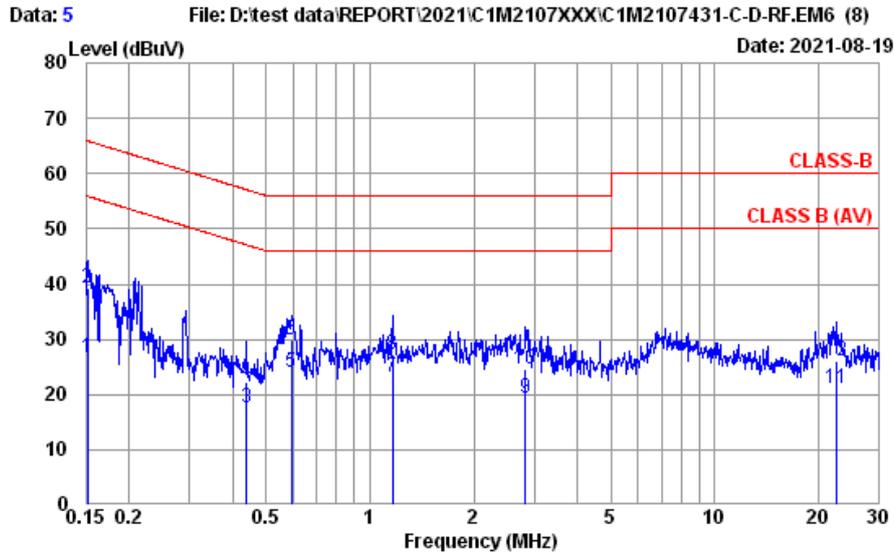


Site No. : No.8 Shielded Room Data No. : 5
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-22 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 26°C / 52% Engineer : Roy Hung
 EUT Model : 17Z95P Test Rating : 120Vac/60
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	6.50	26.78	55.91	29.13	Average
2	0.152	10.40	0.03	9.85	18.89	39.17	65.91	26.74	QP
3	0.437	10.37	0.03	9.85	-2.59	17.66	47.11	29.45	Average
4	0.437	10.37	0.03	9.85	2.10	22.35	57.11	34.76	QP
5	0.592	10.37	0.03	9.85	3.67	23.92	46.00	22.08	Average
6	0.592	10.37	0.03	9.85	9.58	29.83	56.00	26.17	QP
7	1.160	10.38	0.04	9.85	2.92	23.19	46.00	22.81	Average
8	1.160	10.38	0.04	9.85	7.01	27.28	56.00	28.72	QP
9	2.824	10.41	0.08	9.86	-0.98	19.37	46.00	26.63	Average
10	2.824	10.41	0.08	9.86	4.39	24.74	56.00	31.26	QP
11	22.655	10.80	0.21	9.96	0.02	20.99	50.00	29.01	Average
12	22.655	10.80	0.21	9.96	5.04	26.01	60.00	33.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

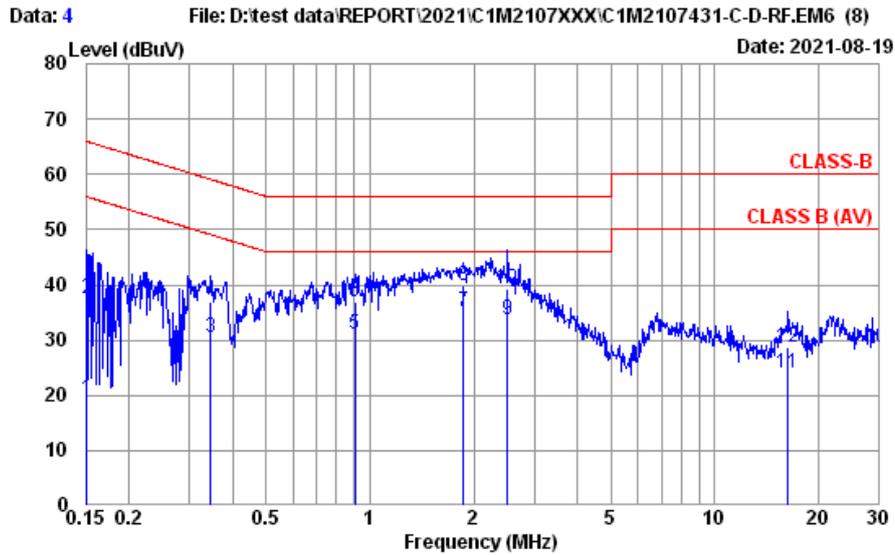


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LIIE
Environment	: 26°C / 52%	Engineer	: Roy Hung
EUT Model	: 17Z95P	Test Rating	: 120Vac/60
Test Mode	: Operating		
	LUXSHARE		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	-1.08	19.20	55.96	36.76	Average
2	0.151	10.40	0.03	9.85	17.25	37.53	65.96	28.43	QP
3	0.345	10.37	0.03	9.85	10.36	30.61	49.09	18.48	Average
4	0.345	10.37	0.03	9.85	16.59	36.84	59.09	22.25	QP
5	0.904	10.38	0.04	9.85	10.84	31.11	46.00	14.89	Average
6	0.904	10.38	0.04	9.85	16.64	36.91	56.00	19.09	QP
7	1.868	10.40	0.06	9.86	14.74	35.06	46.00	10.94	Average
8	1.868	10.40	0.06	9.86	19.64	39.96	56.00	16.04	QP
9	2.500	10.41	0.07	9.86	13.42	33.76	46.00	12.24	Average
10	2.500	10.41	0.07	9.86	18.86	39.20	56.00	16.80	QP
11	16.312	10.71	0.18	9.92	3.23	24.04	50.00	25.96	Average
12	16.312	10.71	0.18	9.92	7.96	28.77	60.00	31.23	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

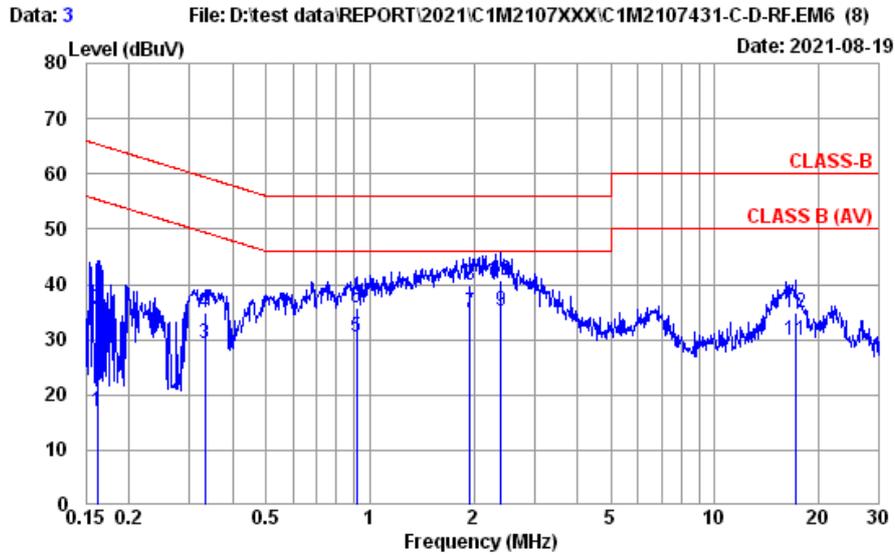

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 52%	Engineer	: Roy Hung
EUT Model	: 17Z95P	Test Rating	: 120Vac/60
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	-3.30	16.98	55.38	38.40	Average
2	0.162	10.40	0.03	9.85	15.13	35.41	65.38	29.97	QP
3	0.332	10.38	0.03	9.85	9.05	29.31	49.40	20.09	Average
4	0.332	10.38	0.03	9.85	14.74	35.00	59.40	24.40	QP
5	0.914	10.38	0.04	9.85	10.16	30.43	46.00	15.57	Average
6	0.914	10.38	0.04	9.85	15.55	35.82	56.00	20.18	QP
7	1.949	10.41	0.06	9.86	14.56	34.89	46.00	11.11	Average
8	1.949	10.41	0.06	9.86	19.56	39.89	56.00	16.11	QP
9	2.396	10.42	0.07	9.86	14.81	35.16	46.00	10.84	Average
10	2.396	10.42	0.07	9.86	20.32	40.67	56.00	15.33	QP
11	17.199	11.01	0.18	9.92	8.86	29.97	50.00	20.03	Average
12	17.199	11.01	0.18	9.92	13.79	34.90	60.00	25.10	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2021/08/13~20	Temp./Hum.	23~26°C/55~59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #2 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
184.230	15.01	3.22	25.86	41.47	33.84	43.50	9.66	Peak
251.160	18.23	3.86	25.74	48.40	44.75	46.00	1.25	Peak
423.820	21.83	5.77	26.69	39.56	40.47	46.00	5.53	Peak
593.570	24.23	6.75	27.42	36.27	39.83	46.00	6.17	Peak
847.710	26.12	8.12	27.18	37.67	44.73	46.00	1.27	Peak
973.810	26.91	8.83	26.75	29.29	38.28	54.00	15.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	20.71	1.32	26.50	40.20	35.73	40.00	4.27	Peak
153.190	16.10	2.89	26.00	48.81	41.80	43.50	1.70	Peak
320.030	19.58	4.58	25.88	39.84	38.12	46.00	7.88	Peak
536.340	23.57	6.56	27.28	39.22	42.07	46.00	3.93	Peak
847.710	26.12	8.12	27.18	34.24	41.30	46.00	4.70	Peak
966.050	26.85	8.79	26.79	29.06	37.91	54.00	16.09	Peak

Mode	BLE(2M)	Frequency	TX 2440MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	26.51	29.48	26.73	40.00	13.27	Peak
98.870	16.33	2.26	26.30	42.03	34.32	43.50	9.18	Peak
248.250	18.11	3.84	25.75	48.69	44.89	46.00	1.11	Peak
593.570	24.23	6.75	27.42	36.45	40.01	46.00	5.99	Peak
878.750	26.23	8.31	27.09	35.14	42.59	46.00	3.41	Peak
962.170	26.83	8.78	26.82	28.90	37.69	54.00	16.31	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
54.250	13.17	1.64	26.46	47.49	35.84	40.00	4.16	Peak
152.220	16.17	2.88	26.00	48.51	41.56	43.50	1.94	Peak
239.520	17.58	3.75	25.76	43.77	39.34	46.00	6.66	Peak
565.440	23.91	6.66	27.35	36.25	39.47	46.00	6.53	Peak
847.710	26.12	8.12	27.18	35.10	42.16	46.00	3.84	Peak
976.720	26.94	8.85	26.75	28.48	37.52	54.00	16.48	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

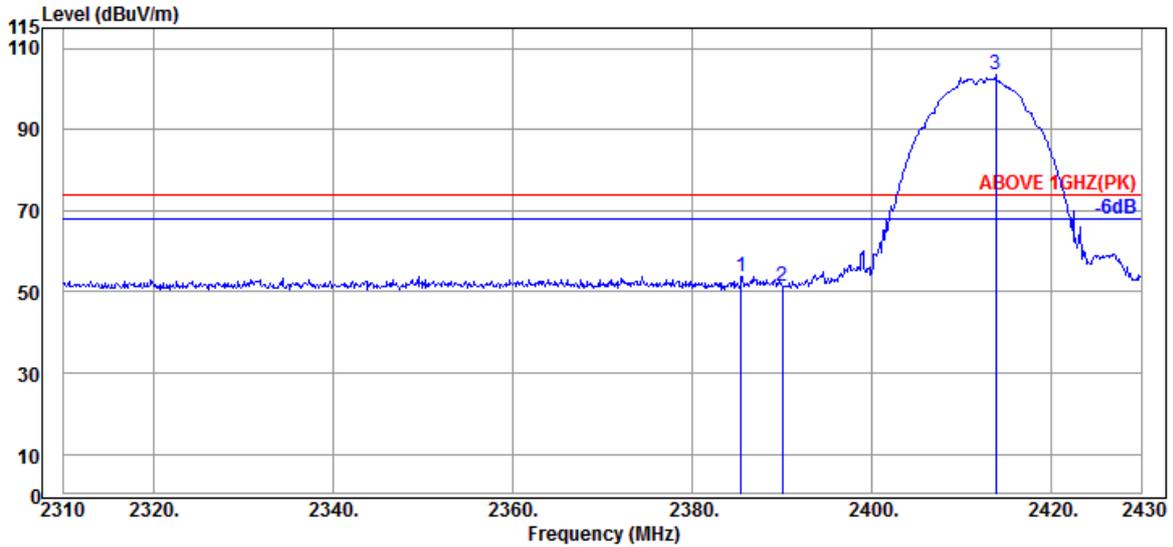

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.480	31.89	7.95	34.53	48.60	53.91	74.00	20.09	Peak
2390.040	31.89	7.95	34.54	46.27	51.57	74.00	22.43	Peak
@ 2413.800	31.94	7.96	34.54	98.32	103.68	---	---	Peak

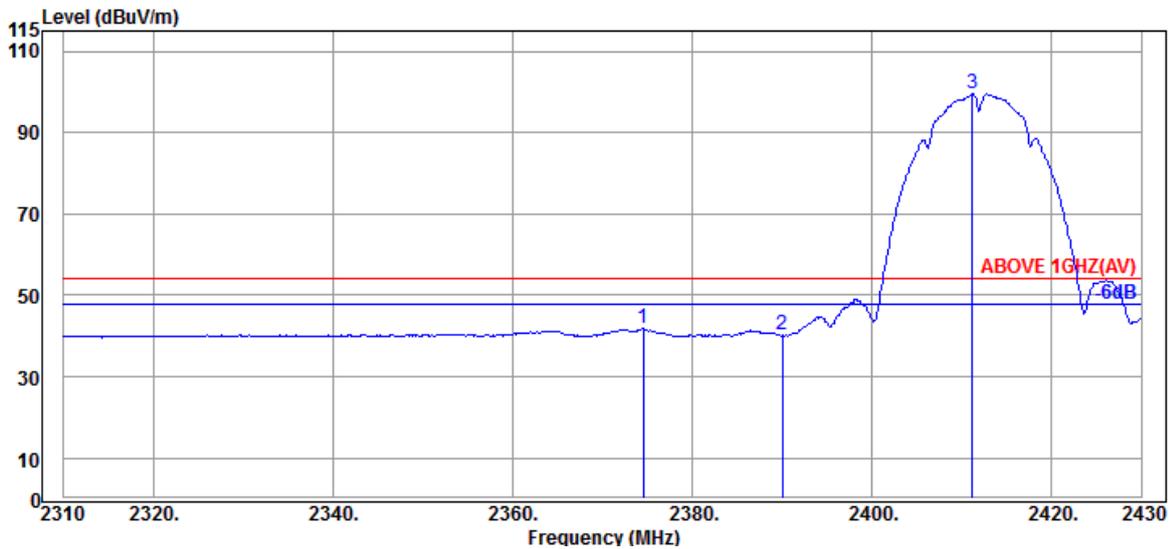


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.560	31.97	7.94	34.53	36.45	41.83	54.00	12.17	Average
2390.040	31.89	7.95	34.54	34.92	40.22	54.00	13.78	Average
@ 2411.160	31.87	7.96	34.54	94.16	99.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

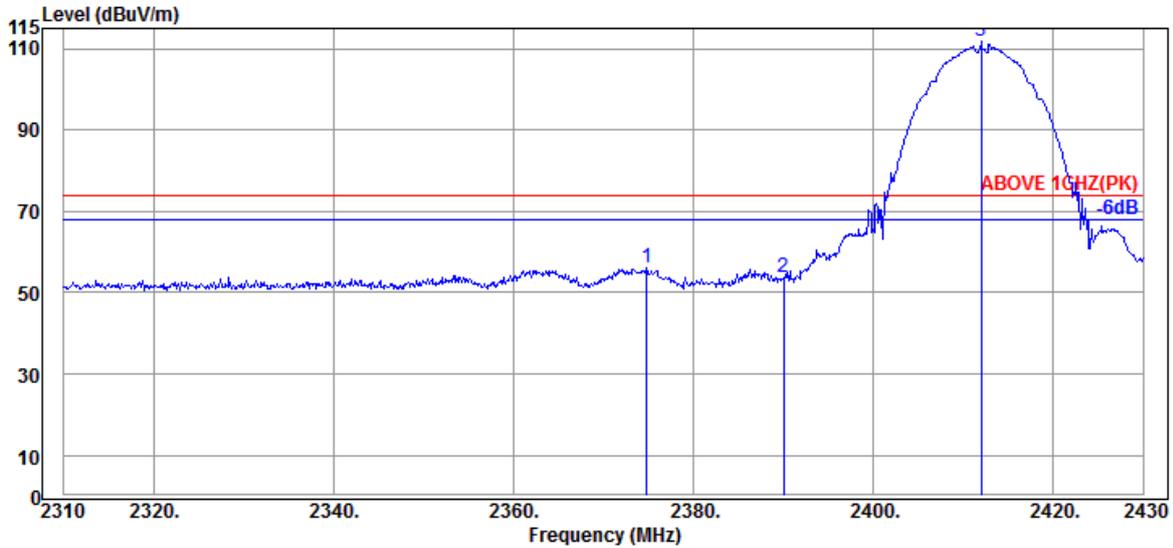

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.800	31.97	7.94	34.53	50.72	56.10	74.00	17.90	Peak
2390.040	31.89	7.95	34.54	48.30	53.60	74.00	20.40	Peak
@ 2412.000	31.94	7.96	34.54	106.33	111.69	---	---	Peak

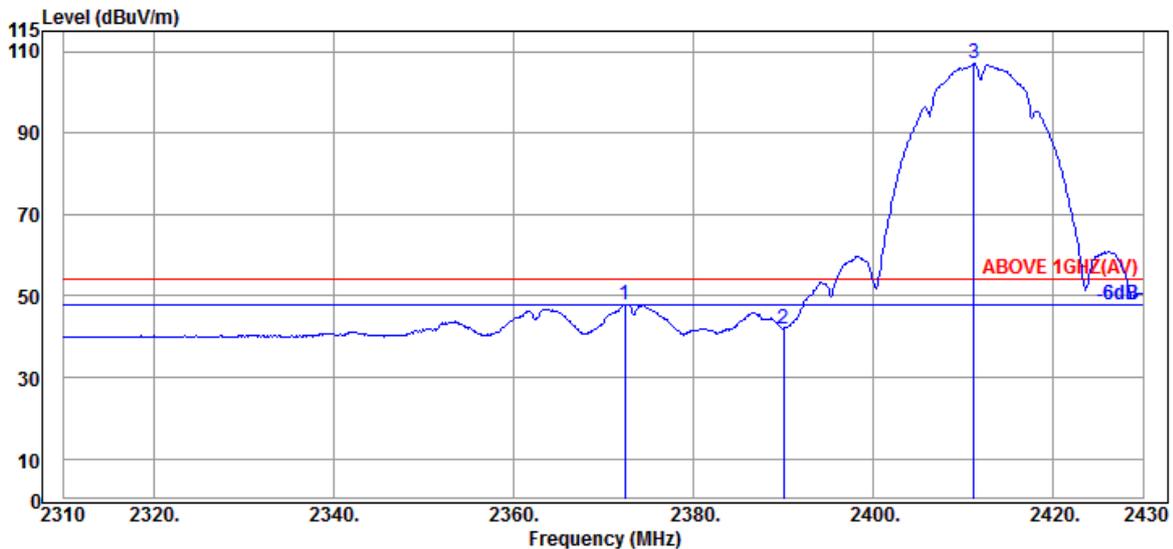


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.400	31.97	7.94	34.53	42.52	47.90	54.00	6.10	Average
2390.040	31.89	7.95	34.54	36.53	41.83	54.00	12.17	Average
@ 2411.60	31.87	7.96	34.54	101.68	106.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

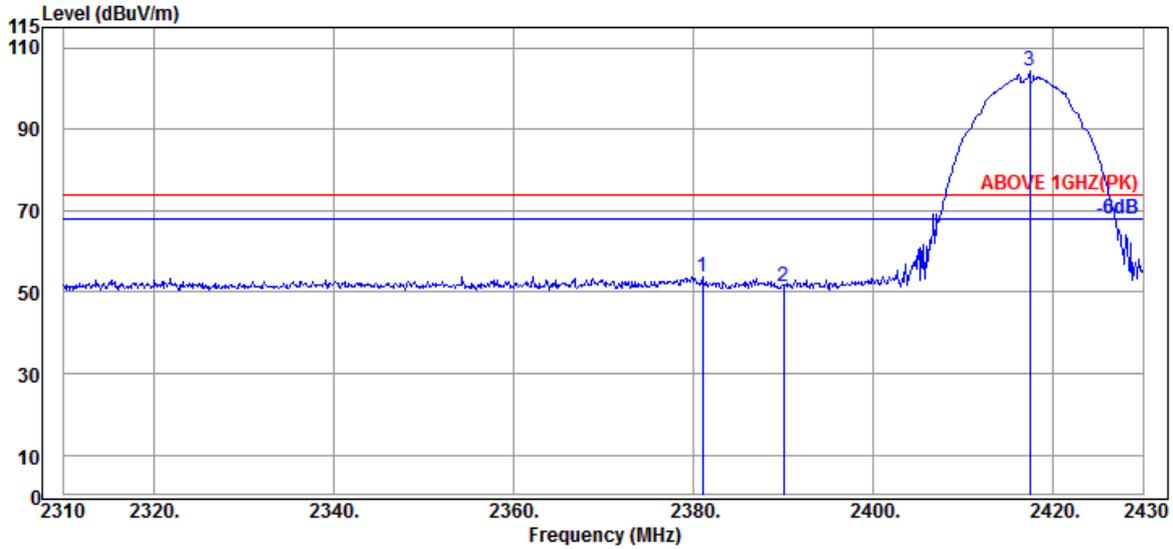

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.040	31.93	7.95	34.53	48.45	53.80	74.00	20.20	Peak
2390.040	31.89	7.95	34.54	45.94	51.24	74.00	22.76	Peak
@ 2417.400	31.94	7.96	34.54	99.01	104.37	---	---	Peak

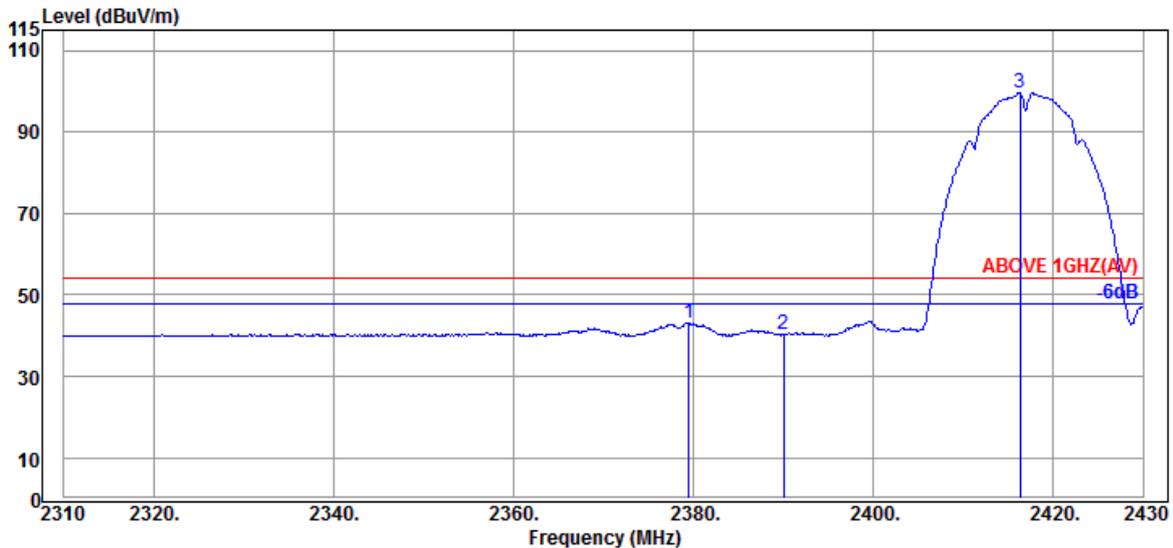


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.480	31.93	7.95	34.53	37.84	43.19	54.00	10.81	Average
2390.040	31.89	7.95	34.54	34.95	40.25	54.00	13.75	Average
@ 2416.320	31.94	7.96	34.54	94.15	99.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

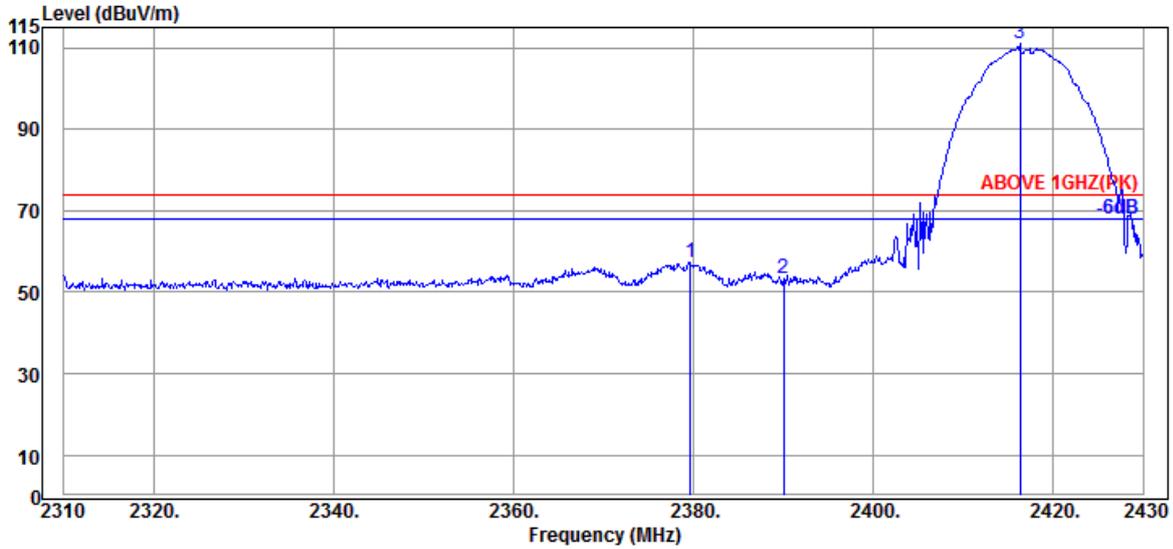

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.720	31.93	7.95	34.53	51.82	57.17	74.00	16.83	Peak
2390.040	31.89	7.95	34.54	48.06	53.36	74.00	20.64	Peak
@ 2416.320	31.94	7.96	34.54	105.61	110.97	---	---	Peak

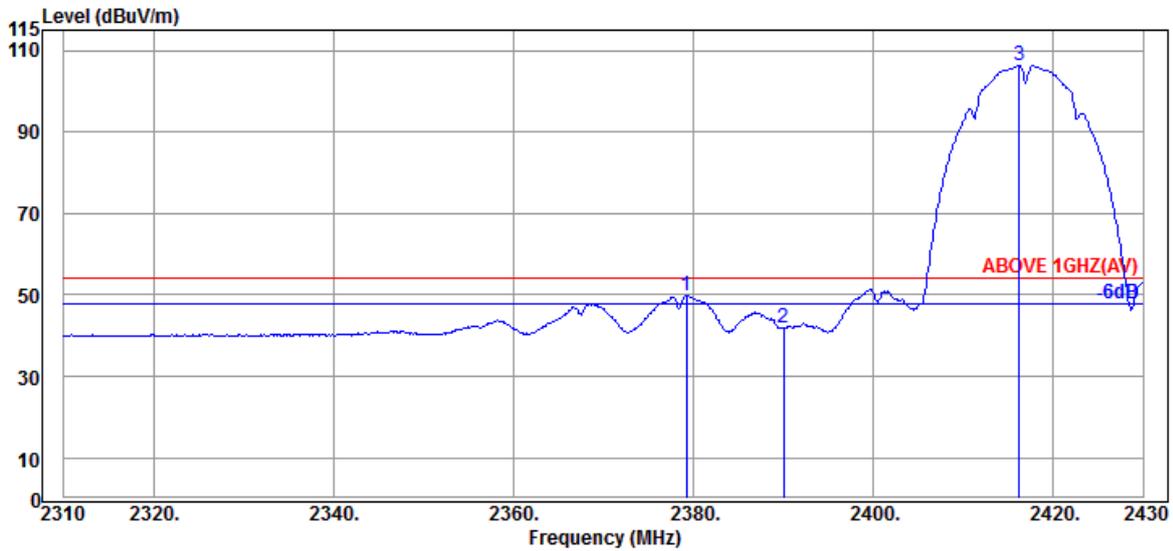


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.240	31.93	7.95	34.53	44.55	49.90	54.00	4.10	Average
2390.040	31.89	7.95	34.54	36.48	41.78	54.00	12.22	Average
@ 2416.200	31.94	7.96	34.54	101.13	106.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

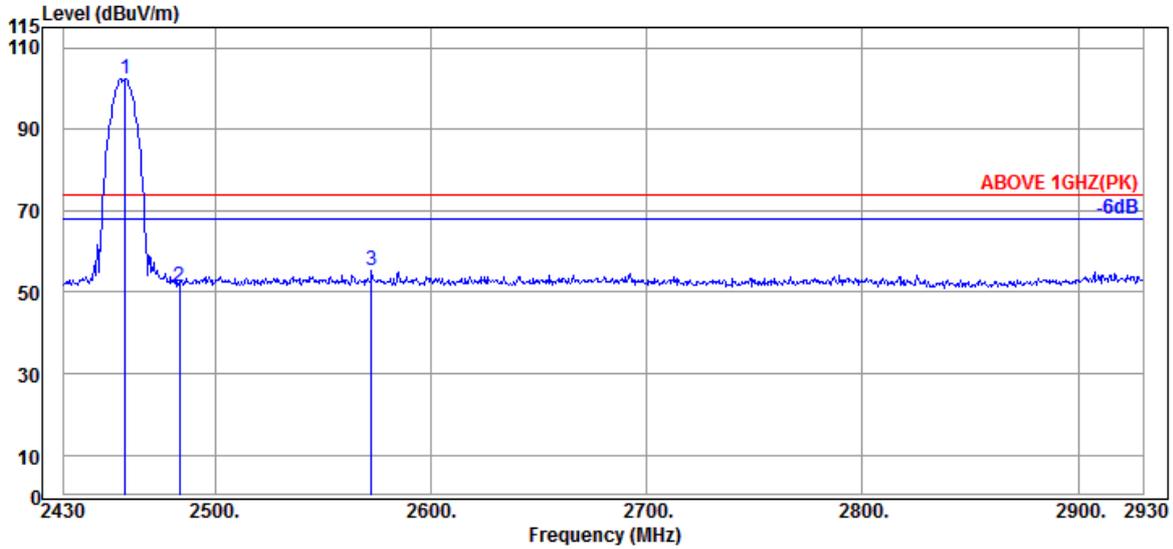

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	96.60	102.33	---	---	Peak
2483.500	32.30	7.99	34.55	45.75	51.49	74.00	22.51	Peak
2572.500	32.50	8.04	34.58	49.31	55.27	74.00	18.73	Peak

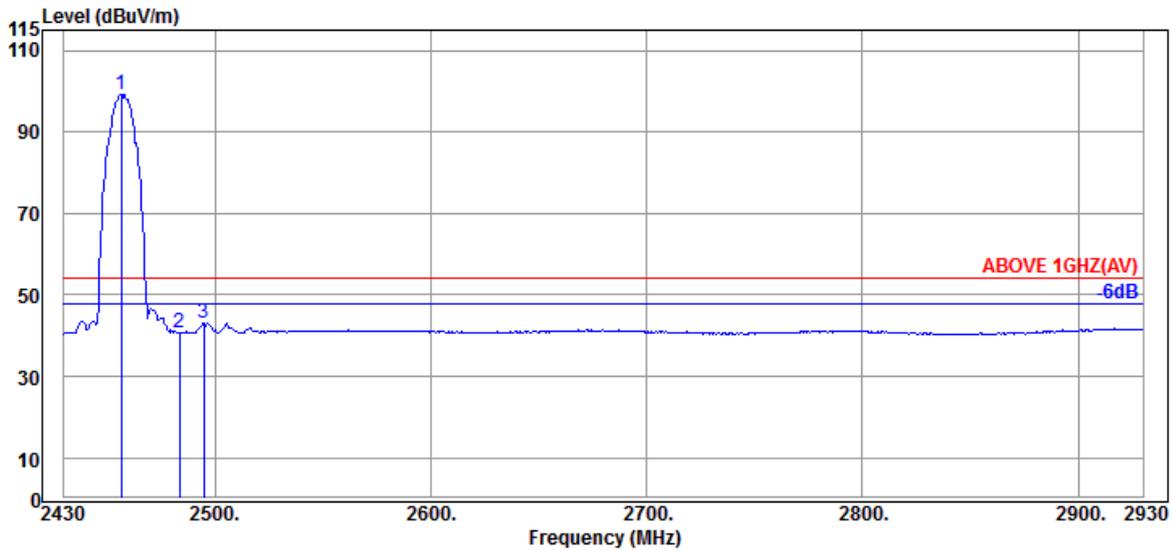


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	32.30	7.98	34.55	93.45	99.18	---	---	Average
2483.500	32.30	7.99	34.55	34.93	40.67	54.00	13.33	Average
2495.000	32.30	8.00	34.56	37.40	43.14	54.00	10.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

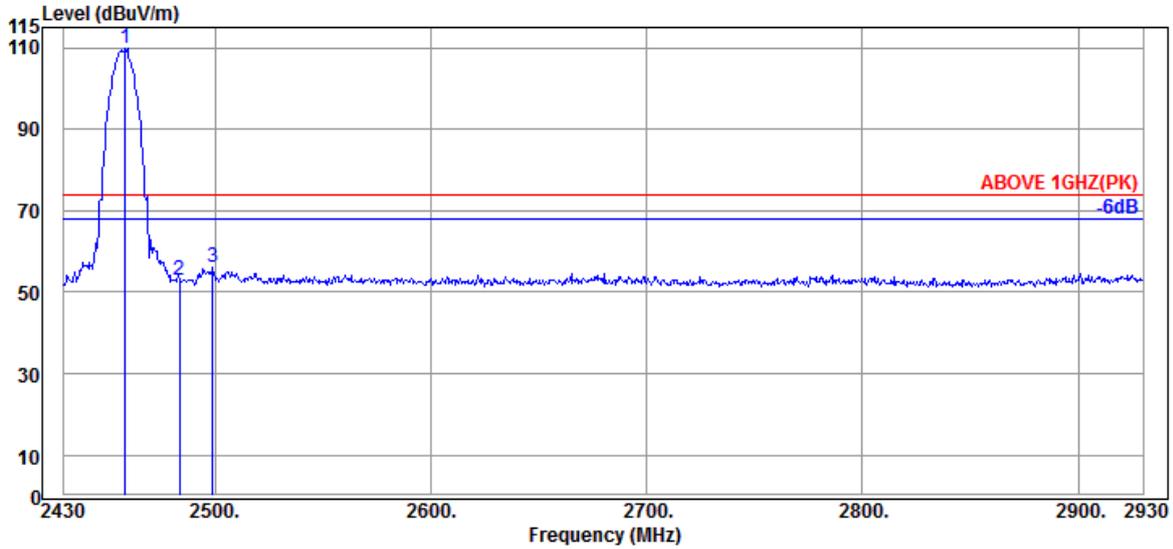

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	104.09	109.82	---	---	Peak
2483.500	32.30	7.99	34.55	47.25	52.99	74.00	21.01	Peak
2499.000	32.30	8.00	34.56	50.38	56.12	74.00	17.88	Peak

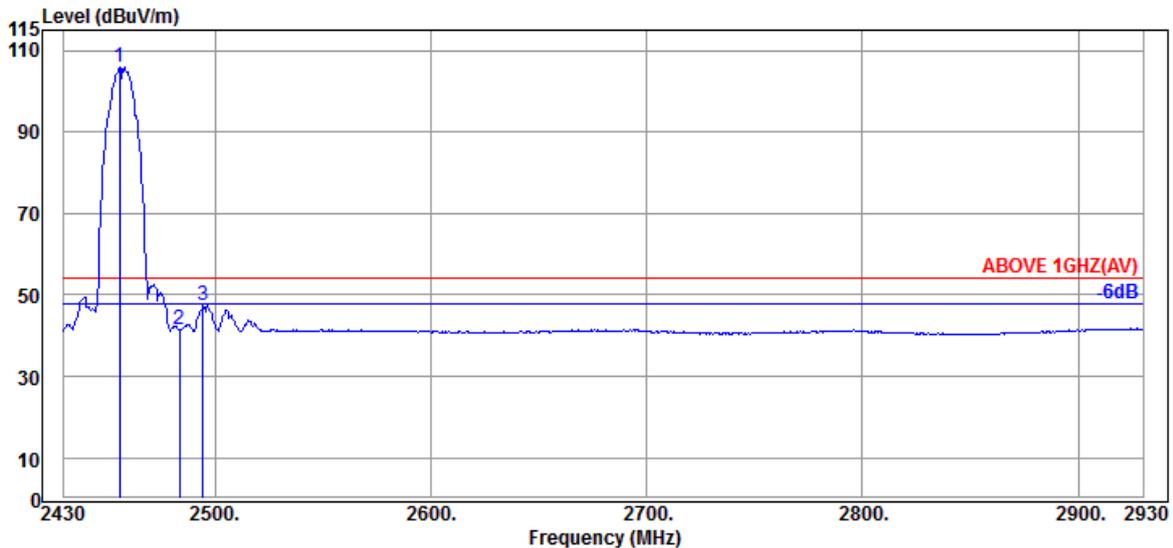


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	100.02	105.75	---	---	Average
2483.500	32.30	7.99	34.55	35.67	41.41	54.00	12.59	Average
2494.500	32.30	8.00	34.56	41.50	47.24	54.00	6.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

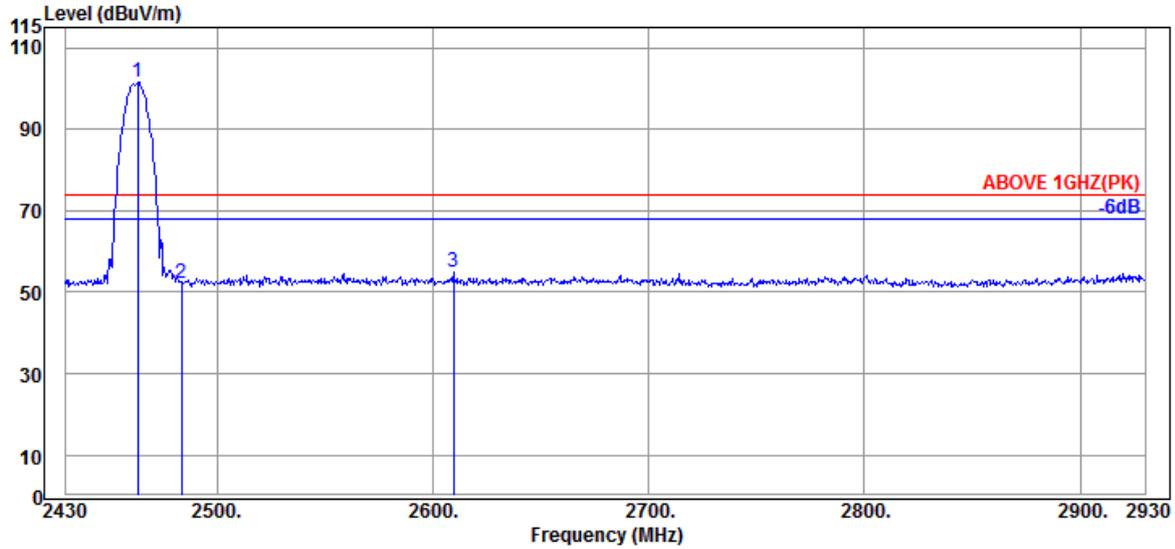

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	96.01	101.74	---	---	Peak
2483.500	32.30	7.99	34.55	46.34	52.08	74.00	21.92	Peak
2609.500	32.45	8.05	34.58	48.89	54.81	74.00	19.19	Peak

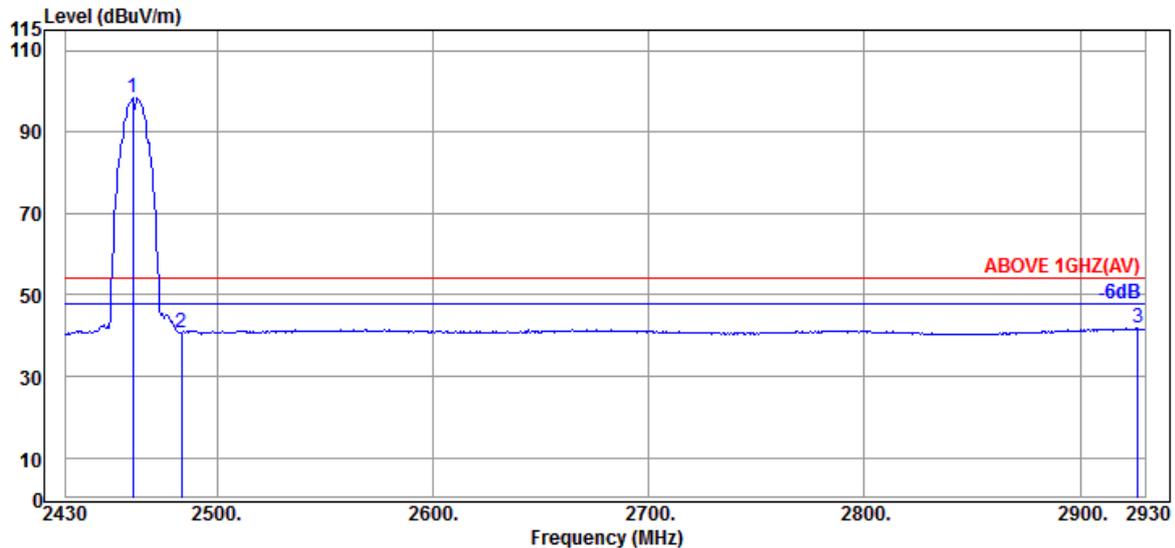


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	92.59	98.32	---	---	Average
2483.500	32.30	7.99	34.55	35.11	40.85	54.00	13.15	Average
2926.500	32.97	8.19	34.65	35.23	41.74	54.00	12.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

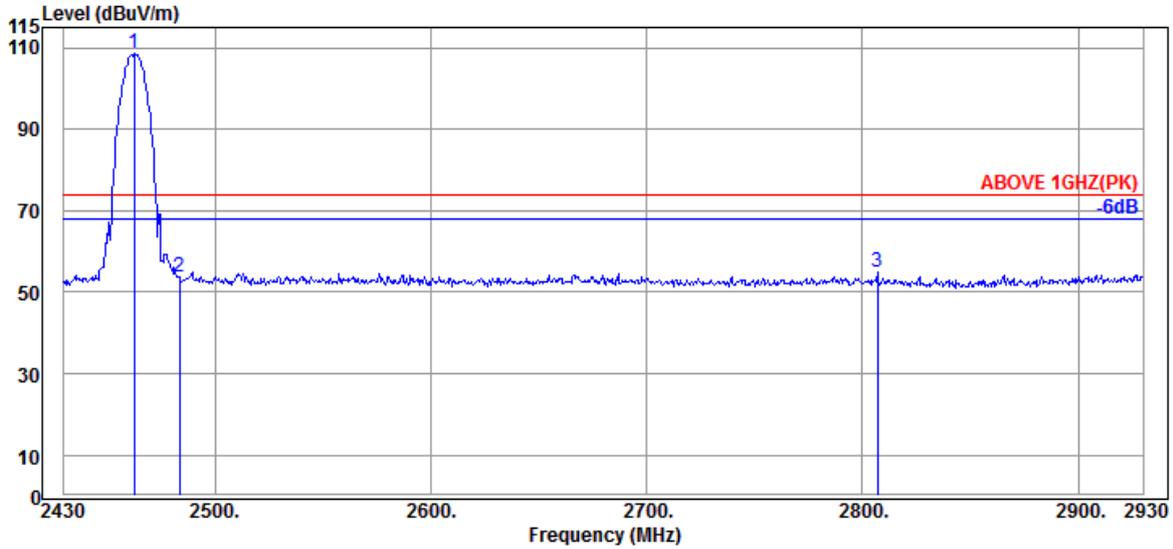

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	32.30	7.98	34.55	102.78	108.51	---	---	Peak
2483.500	32.30	7.99	34.55	47.83	53.57	74.00	20.43	Peak
2807.000	32.37	8.14	34.62	48.85	54.74	74.00	19.26	Peak

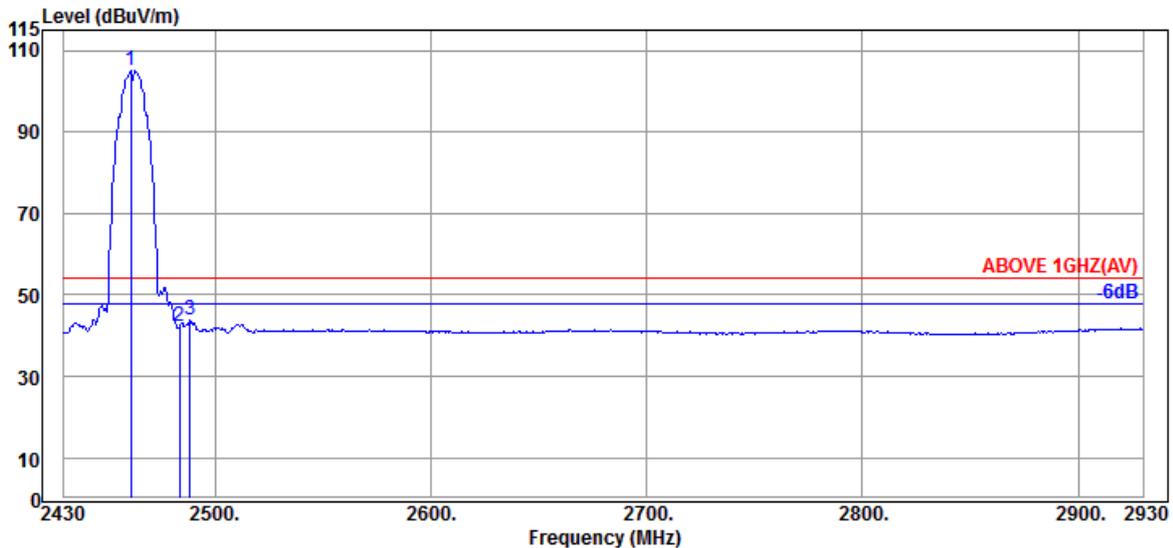


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	99.26	104.99	---	---	Average
2483.500	32.30	7.99	34.55	36.47	42.21	54.00	11.79	Average
2488.500	32.30	8.00	34.55	37.97	43.72	54.00	10.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

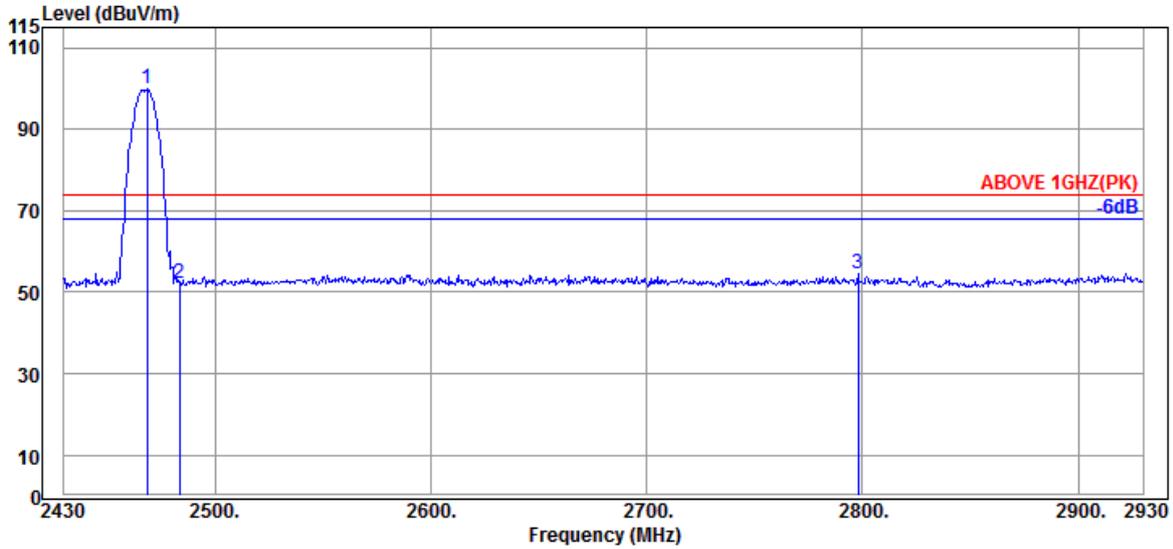

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	94.24	99.97	---	---	Peak
2483.500	32.30	7.99	34.55	46.45	52.19	74.00	21.81	Peak
2798.000	32.40	8.14	34.62	48.67	54.59	74.00	19.41	Peak

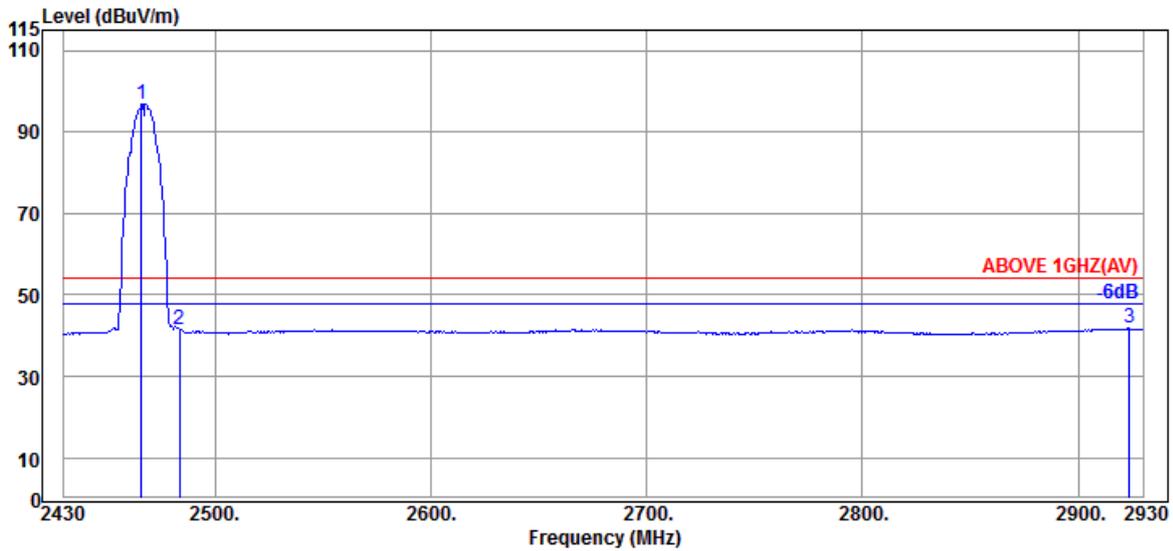


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	91.03	96.76	---	---	Average
2483.500	32.30	7.99	34.55	35.78	41.52	54.00	12.48	Average
2923.500	32.90	8.19	34.64	35.29	41.74	54.00	12.26	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

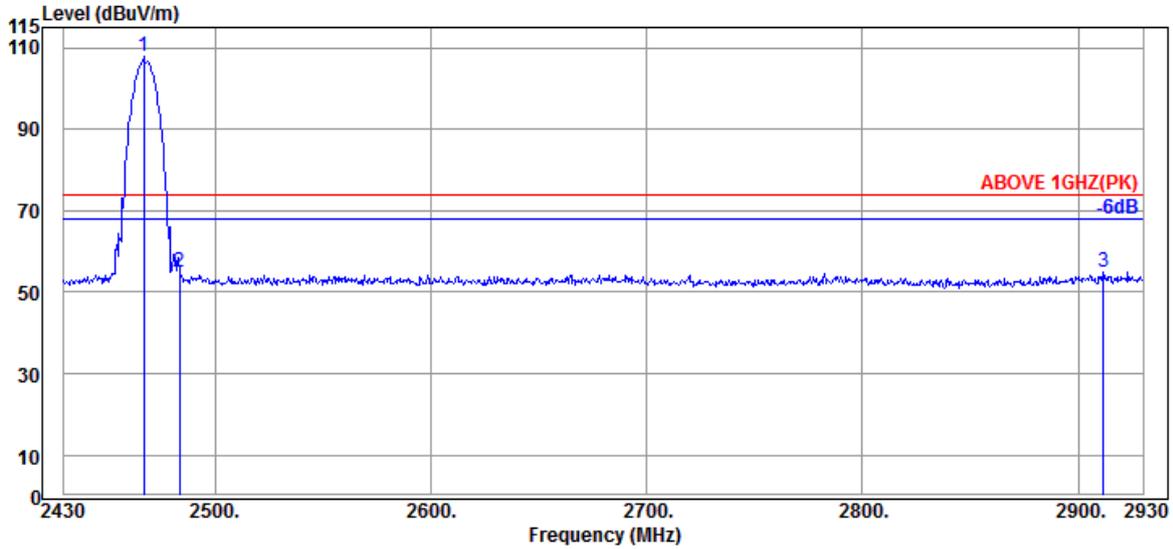

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	32.30	7.98	34.55	102.26	107.99	---	---	Peak
2483.500	32.30	7.99	34.55	49.37	55.11	74.00	18.89	Peak
2911.500	32.83	8.18	34.64	48.55	54.92	74.00	19.08	Peak

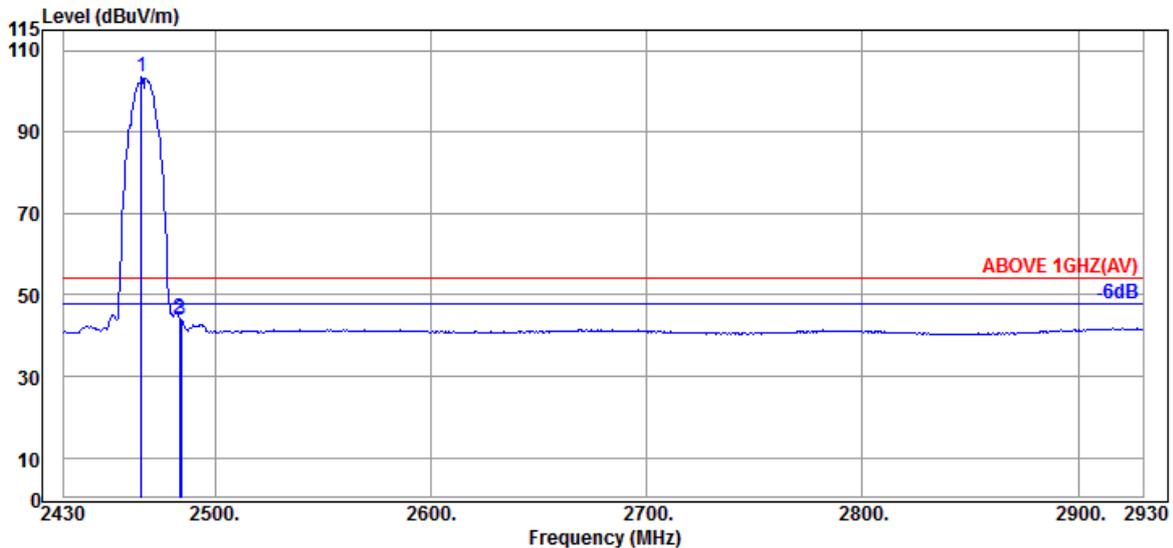


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	97.61	103.34	---	---	Average
2483.500	32.30	7.99	34.55	38.37	44.11	54.00	9.89	Average
2484.500	32.30	7.99	34.55	38.14	43.88	54.00	10.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

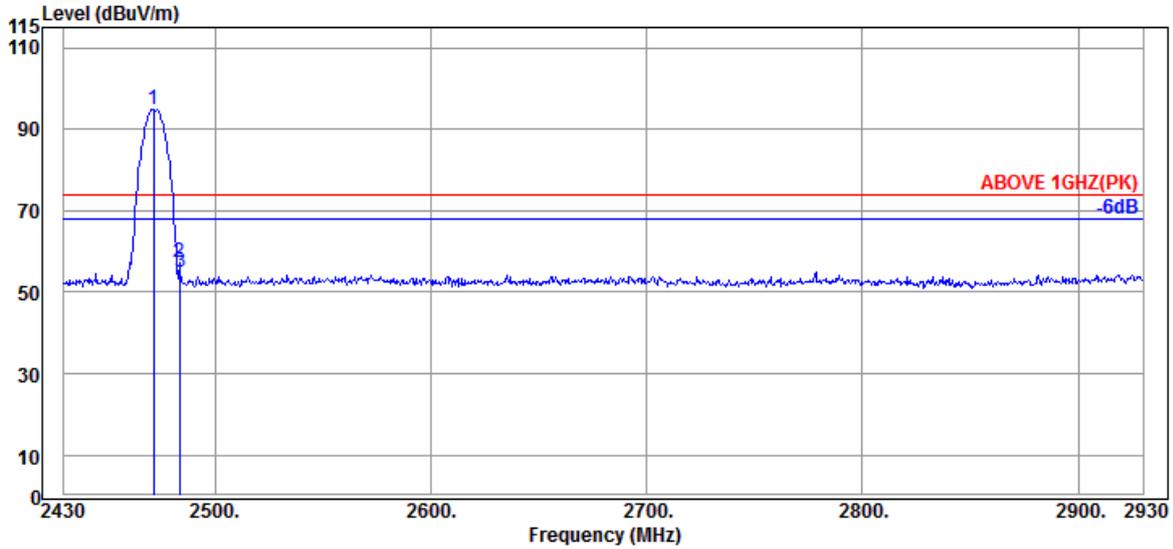

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	89.24	94.98	---	---	Peak
2483.500	32.30	7.99	34.55	51.49	57.23	74.00	16.77	Peak
2484.000	32.30	7.99	34.55	49.11	54.85	74.00	19.15	Peak

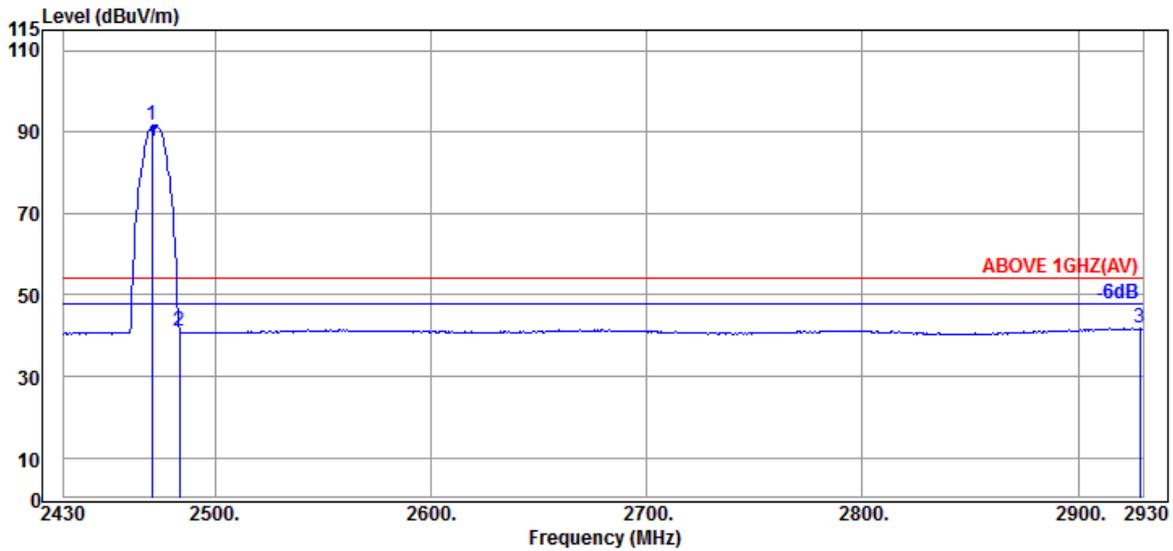


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	85.98	91.72	---	---	Average
2483.500	32.30	7.99	34.55	35.18	40.92	54.00	13.08	Average
2928.500	32.97	8.19	34.65	35.26	41.77	54.00	12.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

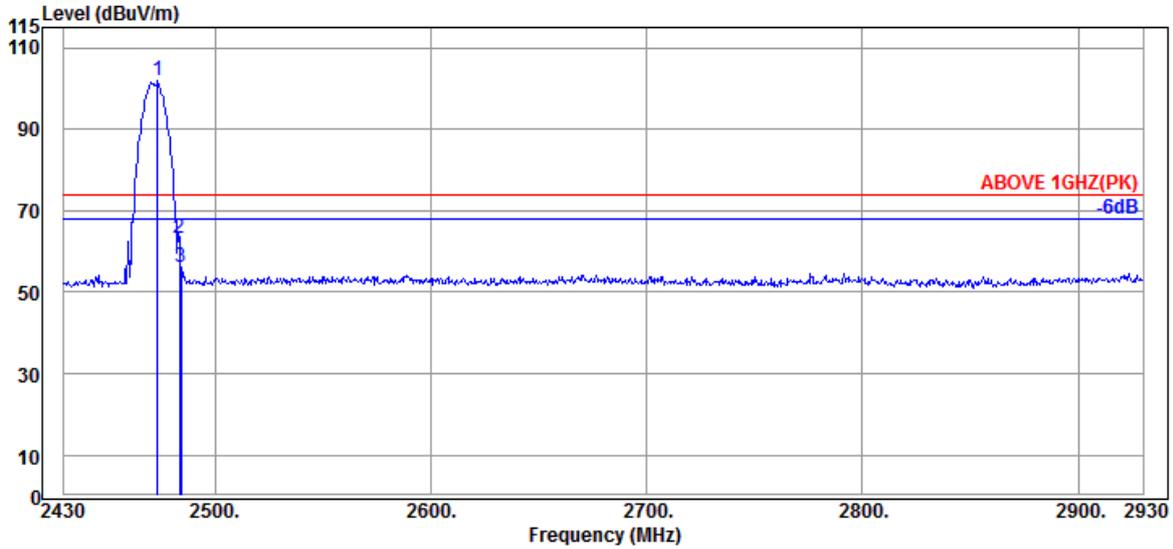

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	32.30	7.99	34.55	96.34	102.08	---	---	Peak
2483.500	32.30	7.99	34.55	57.49	63.23	74.00	10.77	Peak
2484.500	32.30	7.99	34.55	50.55	56.29	74.00	17.71	Peak

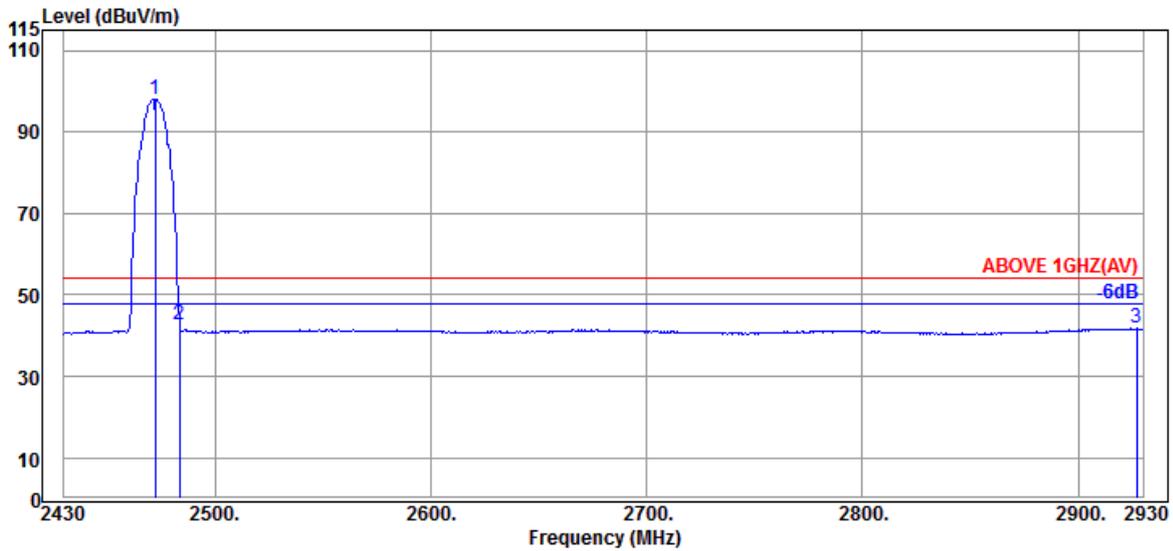


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	32.30	7.99	34.55	92.36	98.10	---	---	Average
2483.500	32.30	7.99	34.55	36.89	42.63	54.00	11.37	Average
2927.000	32.97	8.19	34.65	35.24	41.75	54.00	12.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

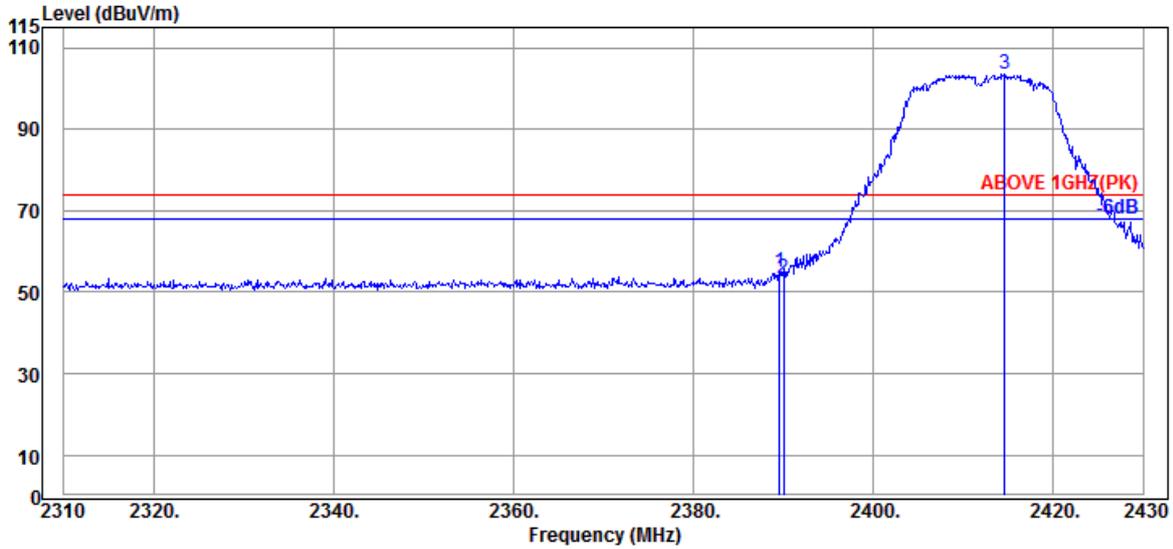

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	49.44	54.75	74.00	19.25	Peak
2390.040	31.89	7.95	34.54	47.96	53.26	74.00	20.74	Peak
@ 2414.640	31.94	7.96	34.54	98.34	103.70	---	---	Peak

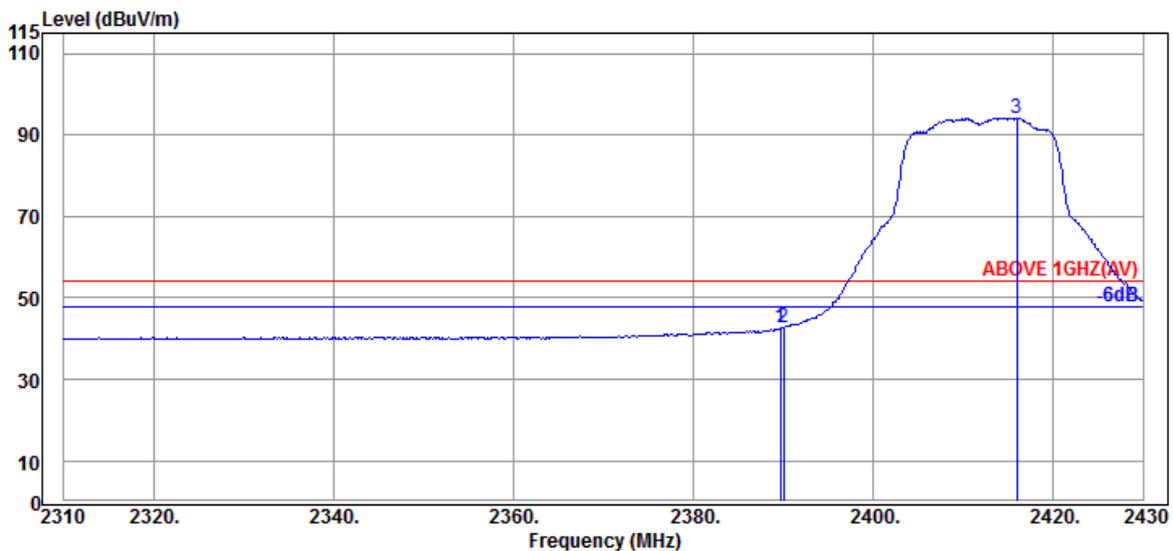


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.18	42.49	54.00	11.51	Average
2390.040	31.89	7.95	34.54	37.32	42.62	54.00	11.38	Average
@ 2415.960	31.94	7.96	34.54	88.83	94.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

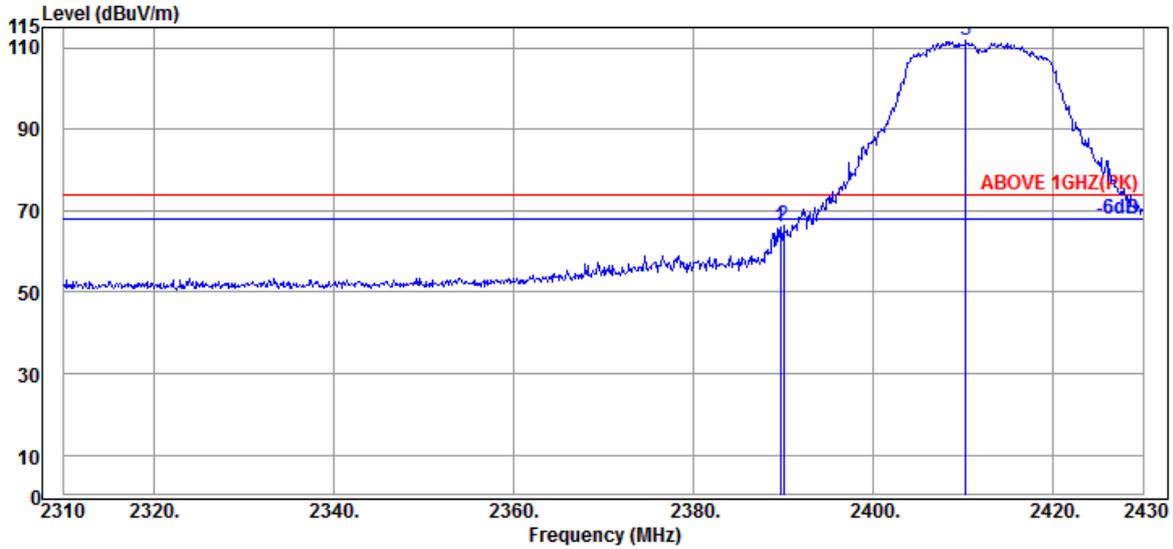

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	60.81	66.12	74.00	7.88	Peak
2390.040	31.89	7.95	34.54	61.08	66.38	74.00	7.62	Peak
@ 2410.320	31.87	7.96	34.54	106.56	111.85	---	---	Peak

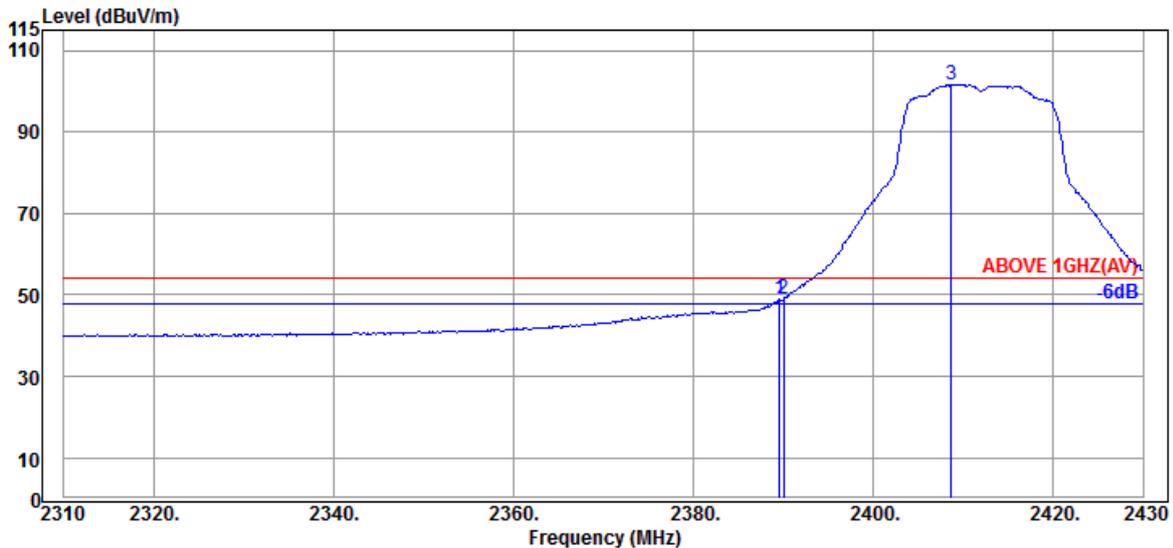


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	43.52	48.83	54.00	5.17	Average
2390.040	31.89	7.95	34.54	43.90	49.20	54.00	4.80	Average
@ 2408.640	31.87	7.96	34.54	96.36	101.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

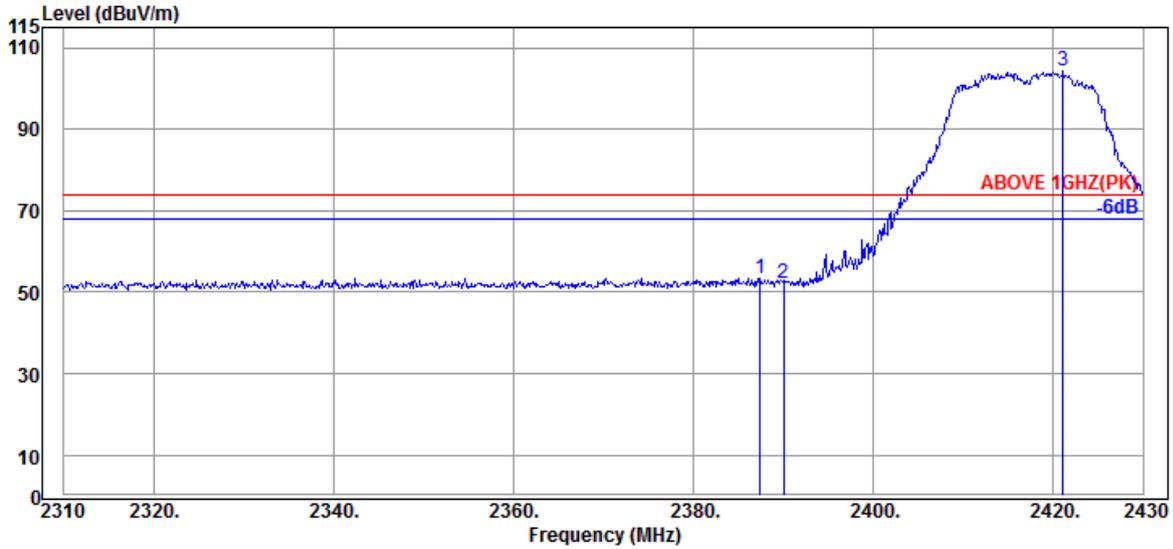

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	31.89	7.95	34.53	48.08	53.39	74.00	20.61	Peak
2390.040	31.89	7.95	34.54	46.91	52.21	74.00	21.79	Peak
@ 2421.120	32.01	7.96	34.54	98.80	104.23	---	---	Peak

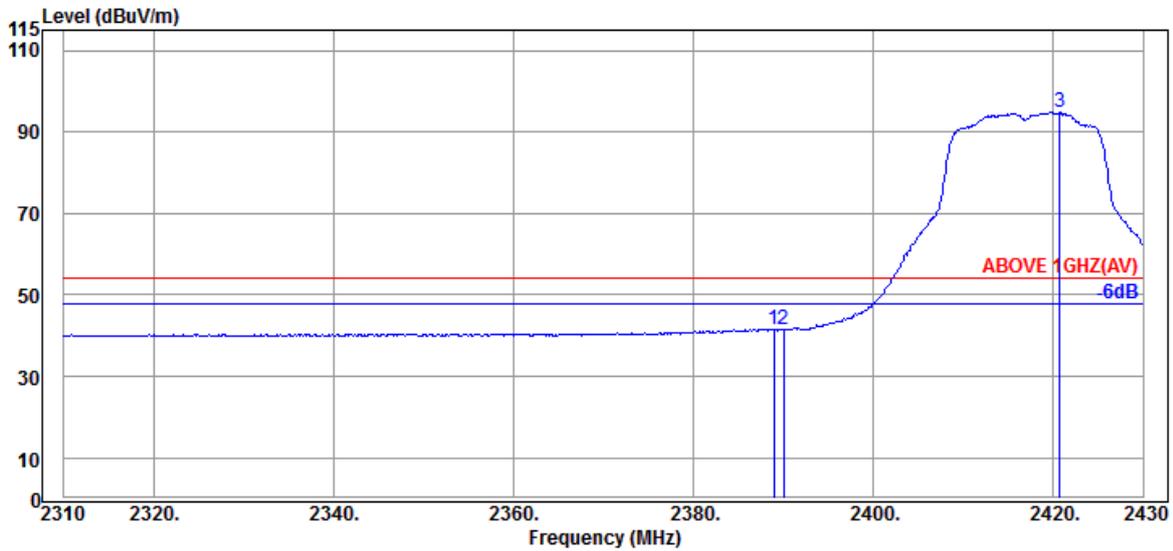


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	36.29	41.60	54.00	12.40	Average
2390.040	31.89	7.95	34.54	36.06	41.36	54.00	12.64	Average
@ 2420.760	32.01	7.96	34.54	89.46	94.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

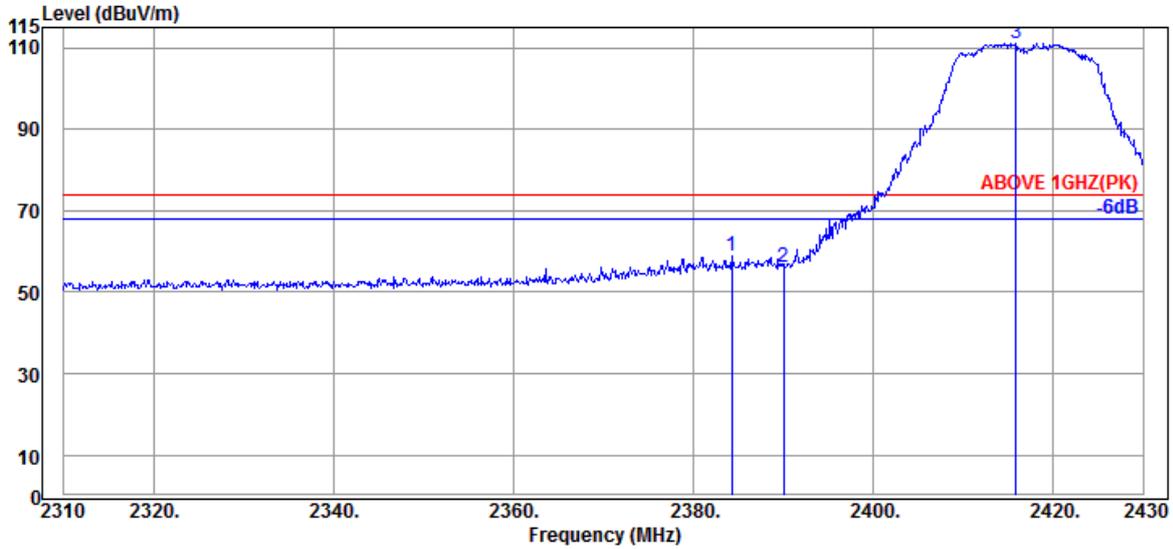

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.280	31.89	7.95	34.53	53.39	58.70	74.00	15.30	Peak
2390.040	31.89	7.95	34.54	50.92	56.22	74.00	17.78	Peak
@ 2415.840	31.94	7.96	34.54	105.68	111.04	---	---	Peak

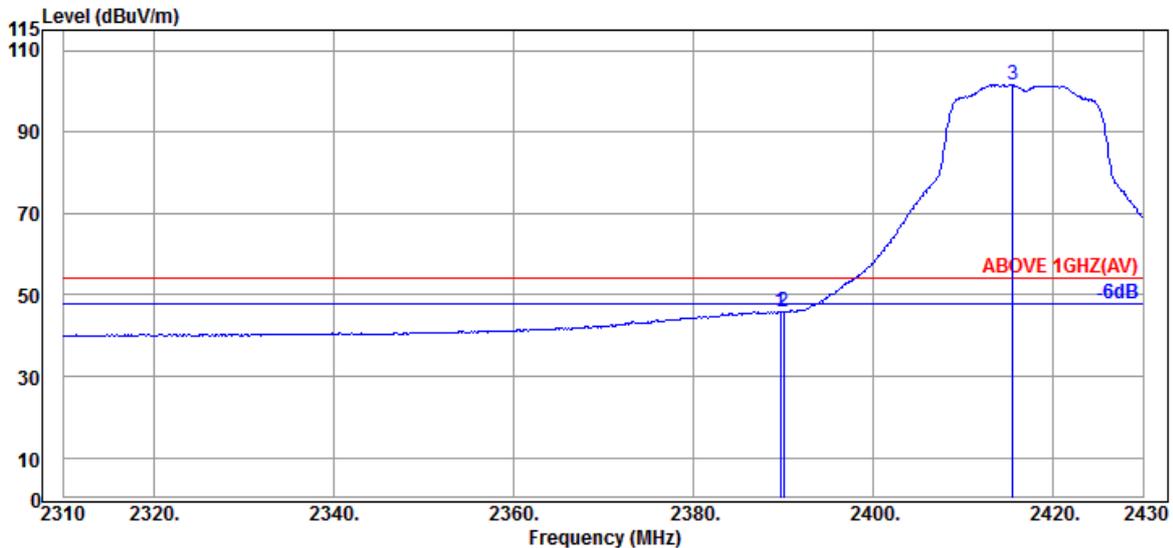


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	40.62	45.93	54.00	8.07	Average
2390.040	31.89	7.95	34.54	40.46	45.76	54.00	8.24	Average
@ 2415.480	31.94	7.96	34.54	96.28	101.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

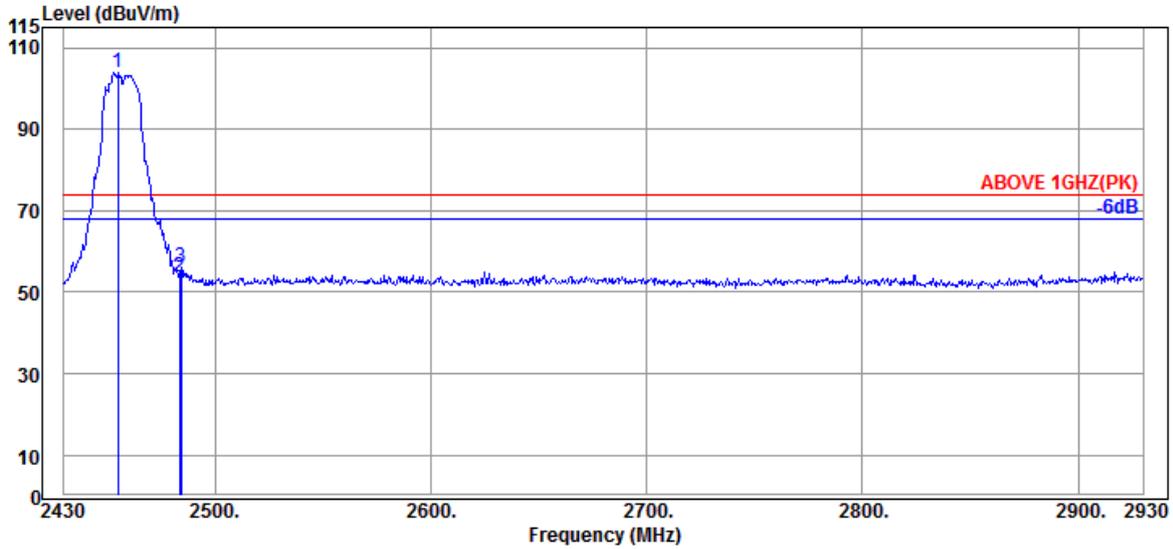

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	98.08	103.81	---	---	Peak
2483.500	32.30	7.99	34.55	48.19	53.93	74.00	20.07	Peak
2484.500	32.30	7.99	34.55	50.30	56.04	74.00	17.96	Peak

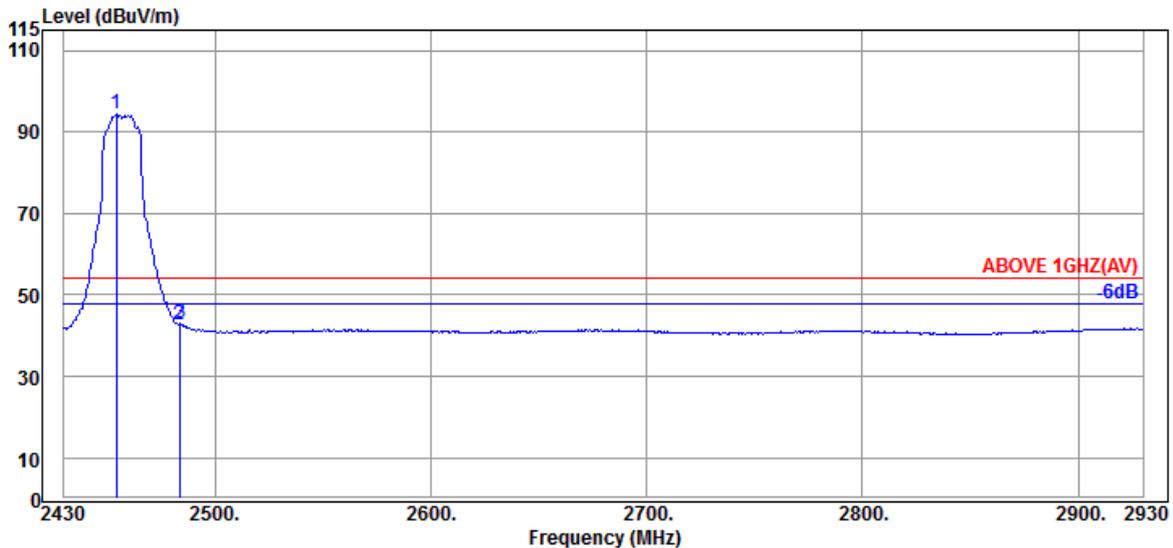


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	88.64	94.37	---	---	Average
2483.500	32.30	7.99	34.55	37.01	42.75	54.00	11.25	Average
2484.000	32.30	7.99	34.55	37.26	43.00	54.00	11.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

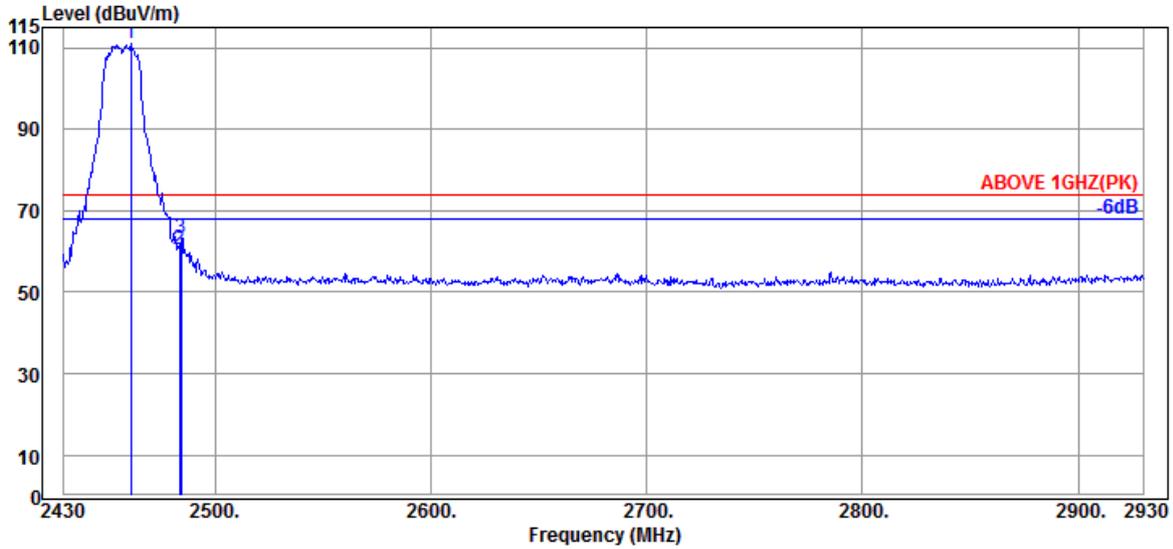

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	105.14	110.87	---	---	Peak
2483.500	32.30	7.99	34.55	54.62	60.36	74.00	13.64	Peak
2484.500	32.30	7.99	34.55	57.36	63.10	74.00	10.90	Peak

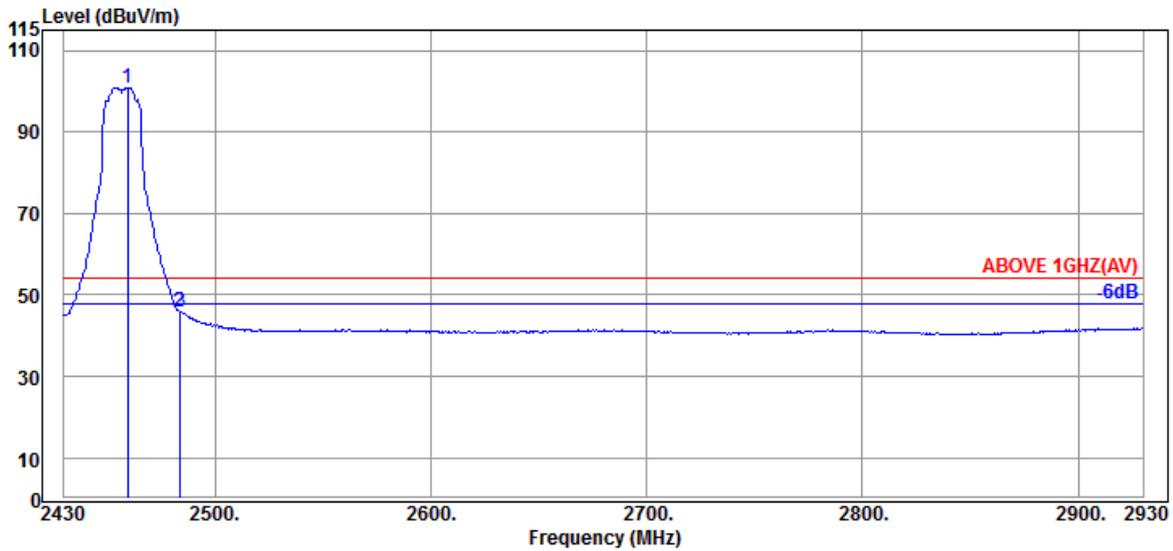


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	95.15	100.88	---	---	Average
2483.500	32.30	7.99	34.55	40.05	45.79	54.00	8.21	Average
2484.000	32.30	7.99	34.55	40.18	45.92	54.00	8.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

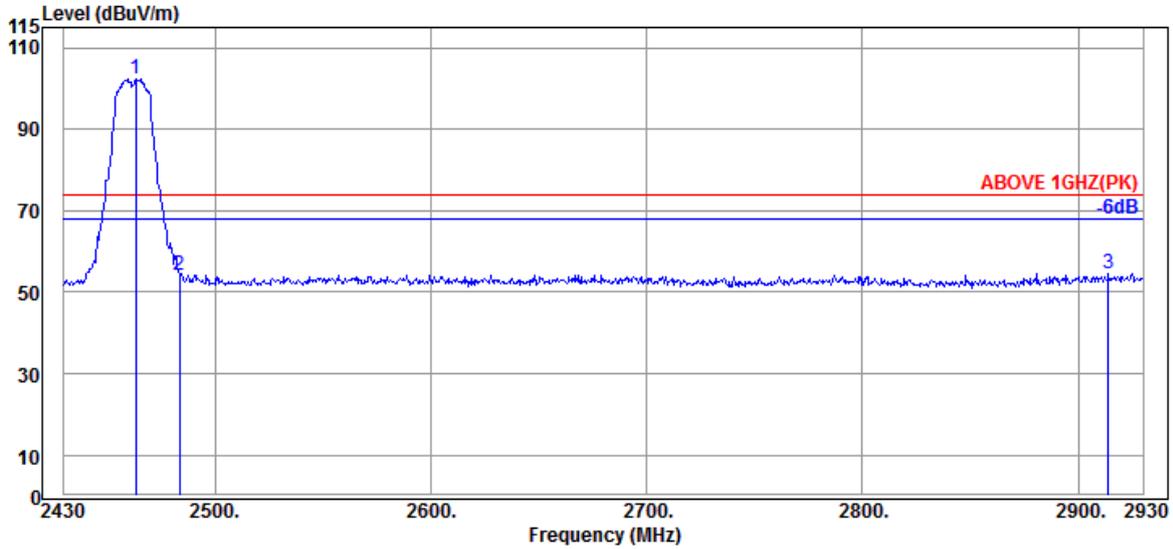

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	96.71	102.44	---	---	Peak
2483.500	32.30	7.99	34.55	48.54	54.28	74.00	19.72	Peak
2914.000	32.83	8.18	34.64	48.27	54.64	74.00	19.36	Peak

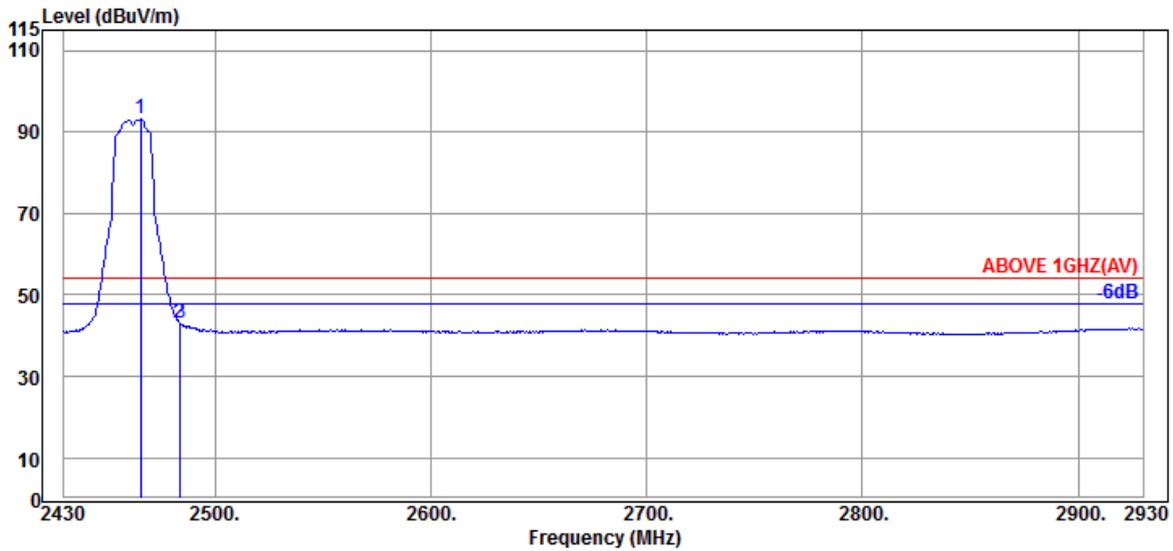


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	87.41	93.14	---	---	Average
2483.500	32.30	7.99	34.55	37.32	43.06	54.00	10.94	Average
2484.000	32.30	7.99	34.55	37.29	43.03	54.00	10.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

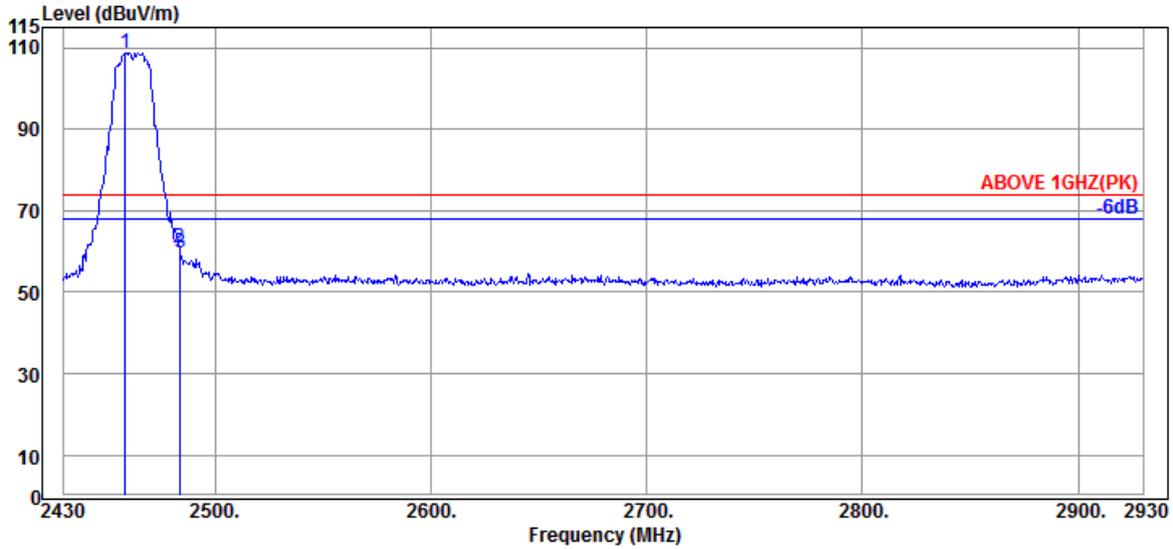

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	103.14	108.87	---	---	Peak
2483.500	32.30	7.99	34.55	54.98	60.72	74.00	13.28	Peak
2484.000	32.30	7.99	34.55	53.76	59.50	74.00	14.50	Peak

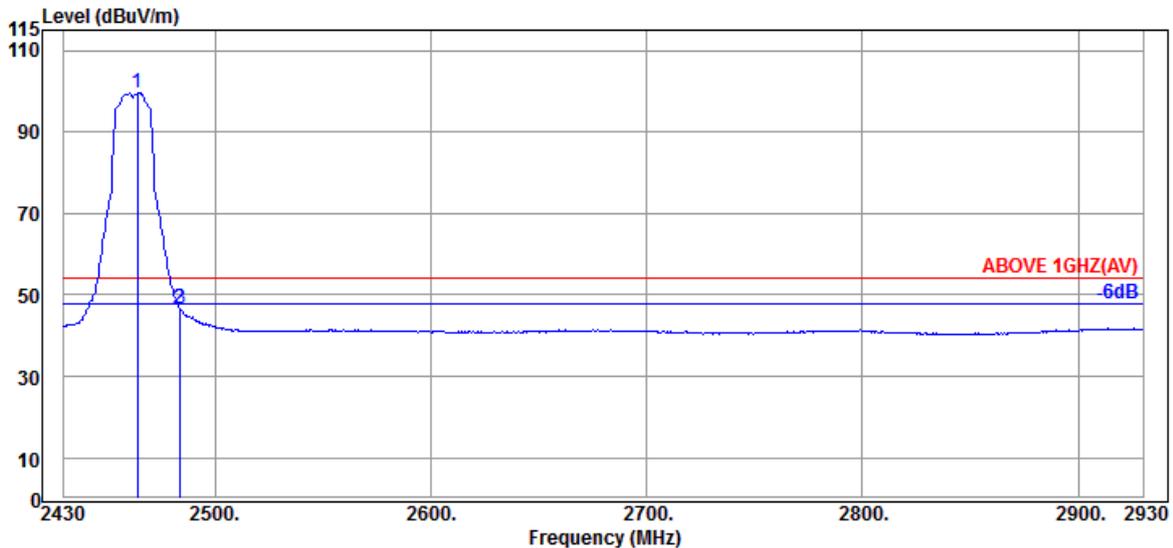


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	93.96	99.69	---	---	Average
2483.500	32.30	7.99	34.55	41.02	46.76	54.00	7.24	Average
2484.000	32.30	7.99	34.55	40.72	46.46	54.00	7.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

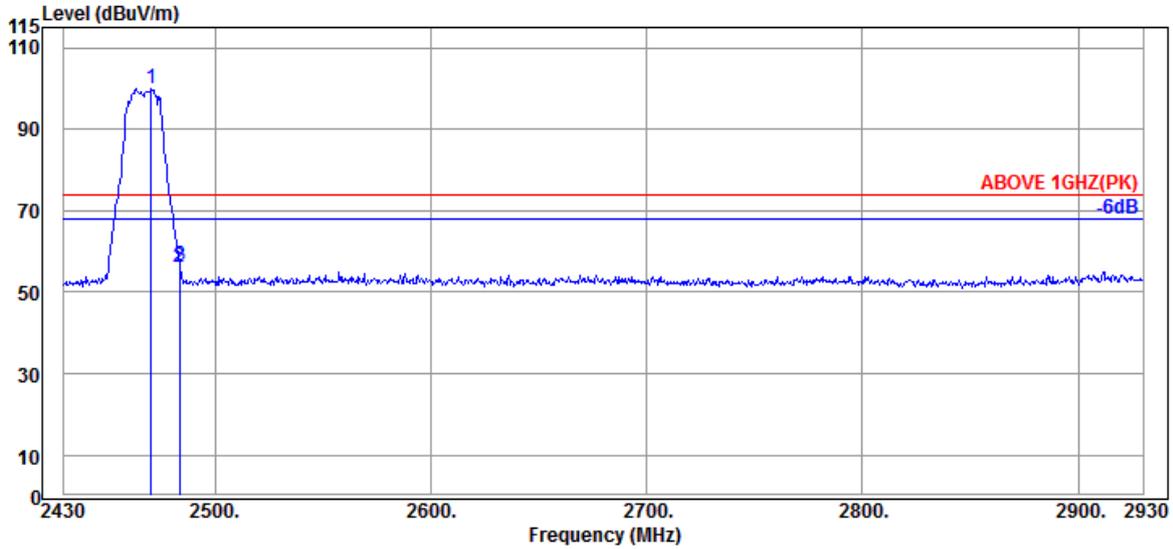

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	94.42	100.16	---	---	Peak
2483.500	32.30	7.99	34.55	50.47	56.21	74.00	17.79	Peak
2484.000	32.30	7.99	34.55	50.59	56.33	74.00	17.67	Peak

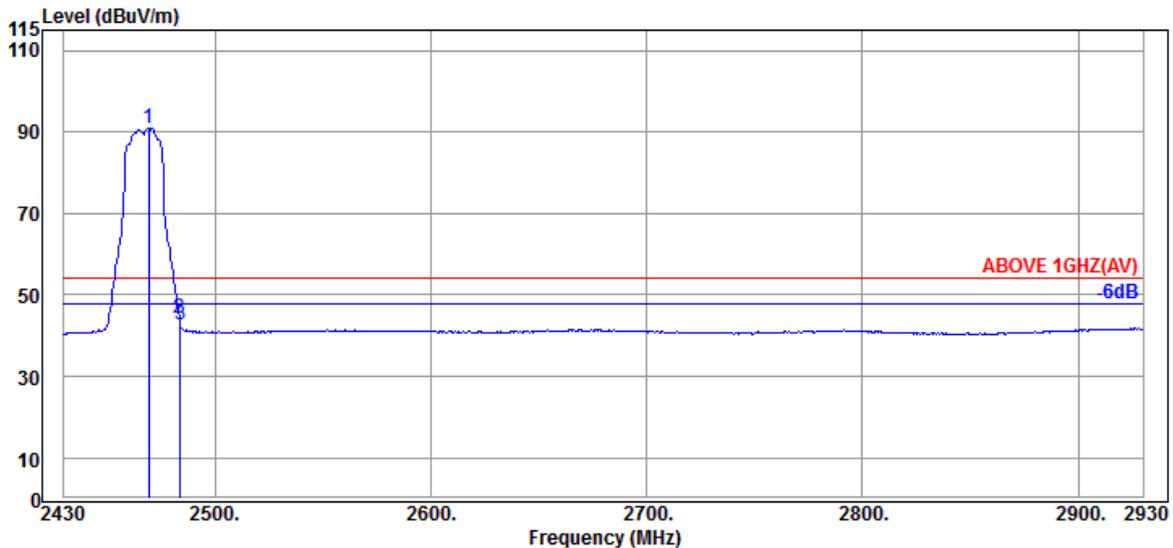


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	85.22	90.95	---	---	Average
2483.500	32.30	7.99	34.55	38.41	44.15	54.00	9.85	Average
2484.000	32.30	7.99	34.55	36.88	42.62	54.00	11.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

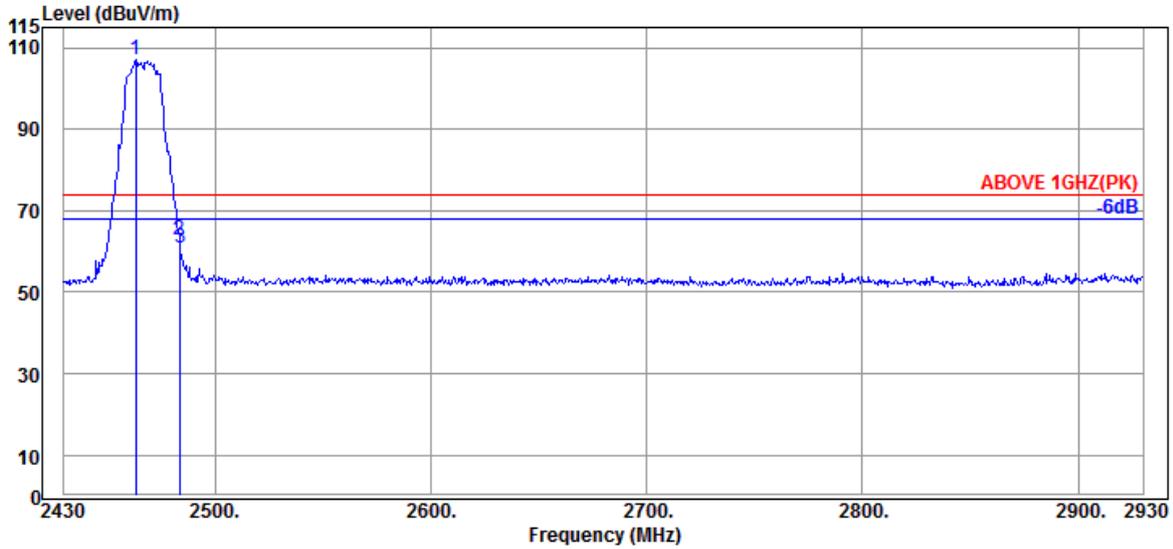

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.500	32.30	7.98	34.55	101.25	106.98	---	---	Peak
	2483.500	32.30	7.99	34.55	57.09	62.83	74.00	11.17	Peak
	2484.000	32.30	7.99	34.55	54.96	60.70	74.00	13.30	Peak

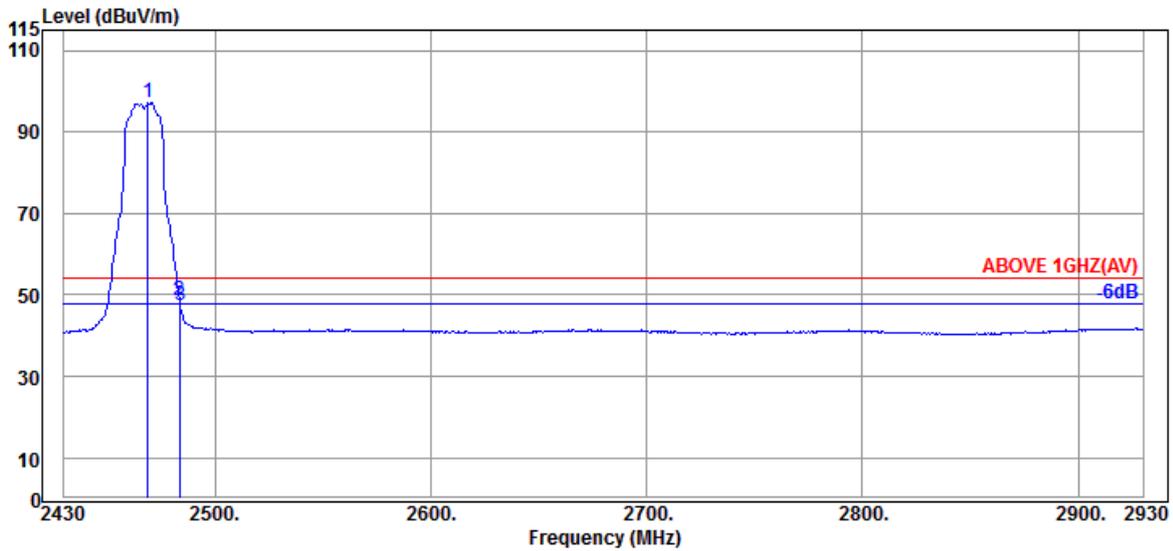


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.000	32.30	7.98	34.55	91.45	97.18	---	---	Average
	2483.500	32.30	7.99	34.55	42.83	48.57	54.00	5.43	Average
	2484.000	32.30	7.99	34.55	41.49	47.23	54.00	6.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

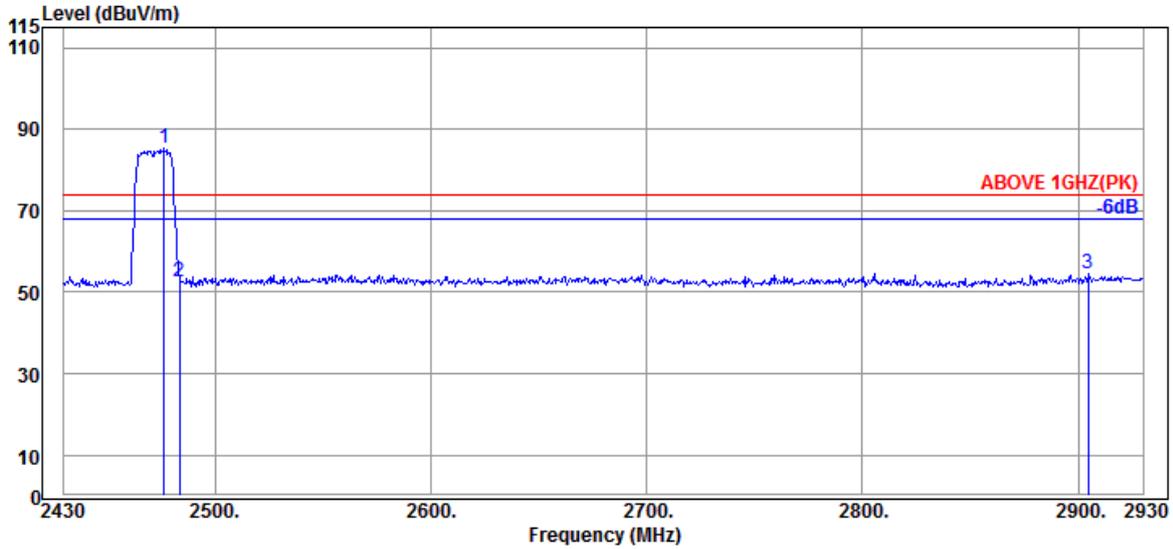

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	32.30	7.99	34.55	79.51	85.25	---	---	Peak
2483.500	32.30	7.99	34.55	46.67	52.41	74.00	21.59	Peak
2904.500	32.77	8.18	34.64	48.15	54.46	74.00	19.54	Peak

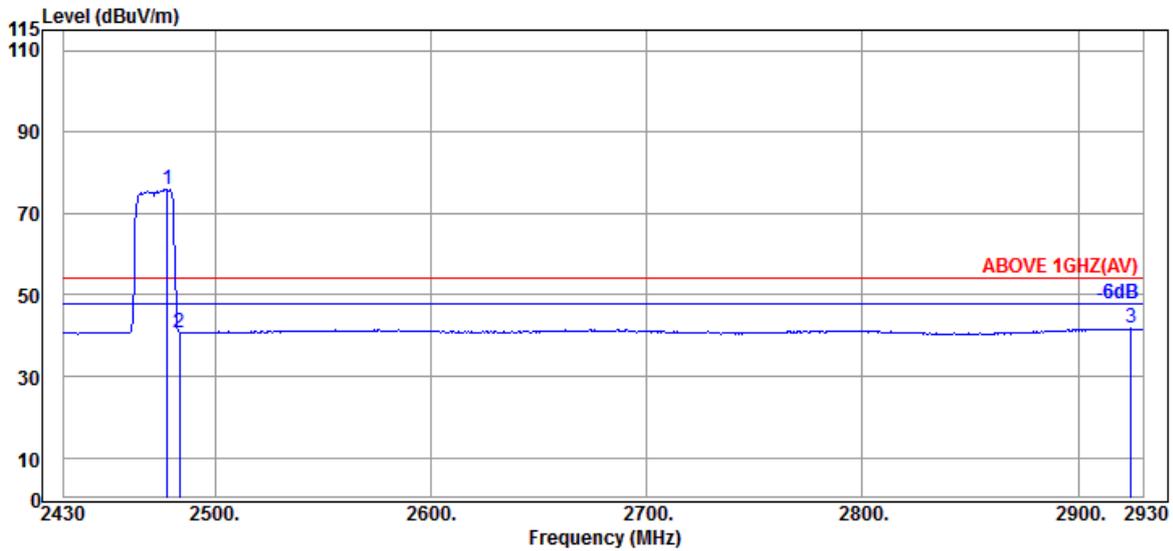


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	32.30	7.99	34.55	70.19	75.93	---	---	Average
2483.500	32.30	7.99	34.55	34.97	40.71	54.00	13.29	Average
2924.500	32.90	8.19	34.64	35.26	41.71	54.00	12.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

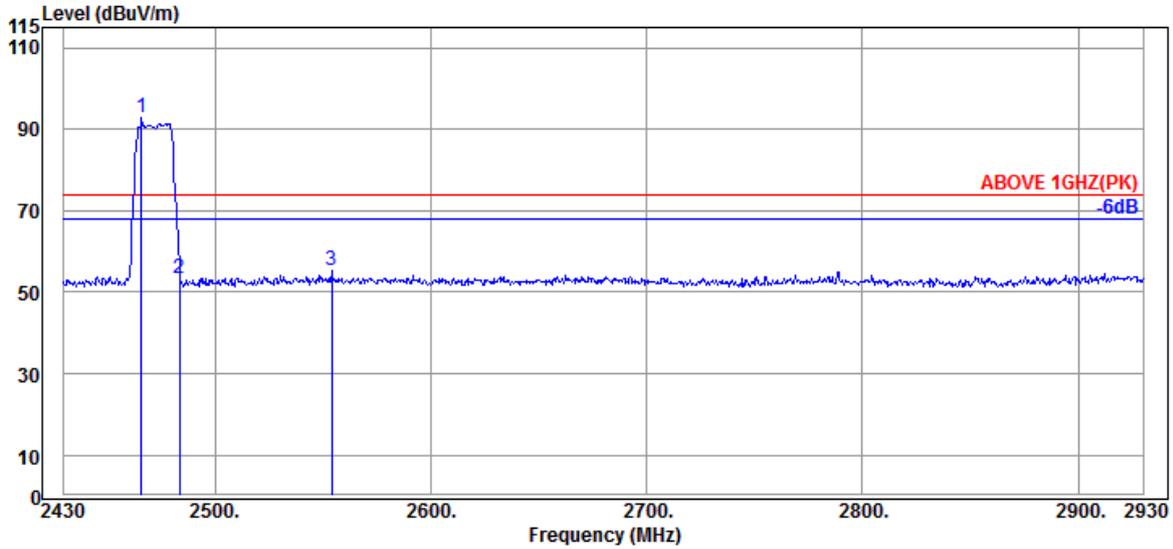

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	87.05	92.78	---	---	Peak
2483.500	32.30	7.99	34.55	47.78	53.52	74.00	20.48	Peak
2554.000	32.50	8.03	34.57	49.18	55.14	74.00	18.86	Peak

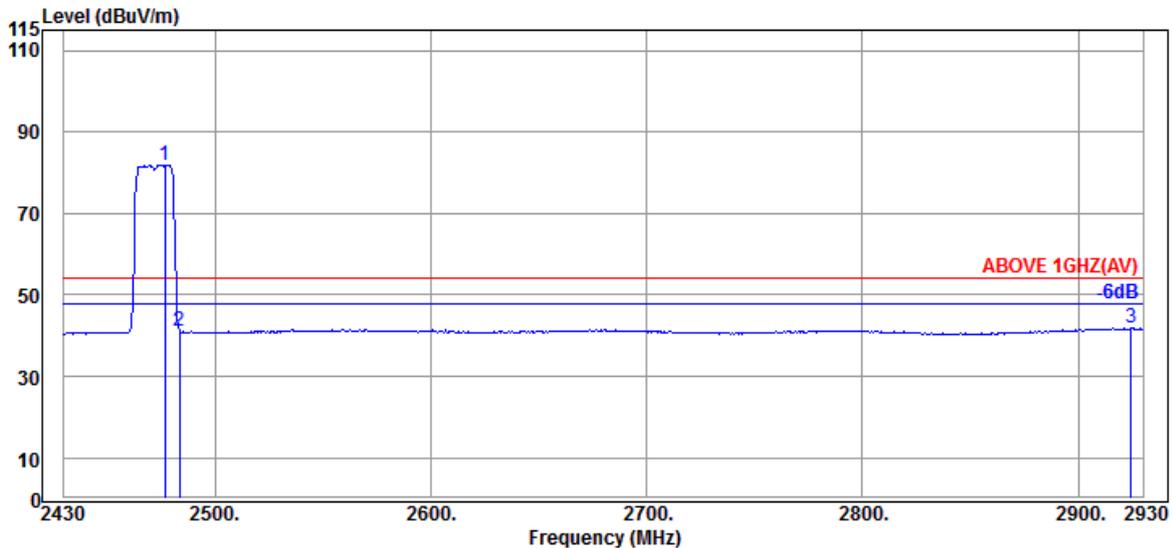


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	32.30	7.99	34.55	76.19	81.93	---	---	Average
2483.500	32.30	7.99	34.55	35.43	41.17	54.00	12.83	Average
2924.500	32.90	8.19	34.64	35.35	41.80	54.00	12.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

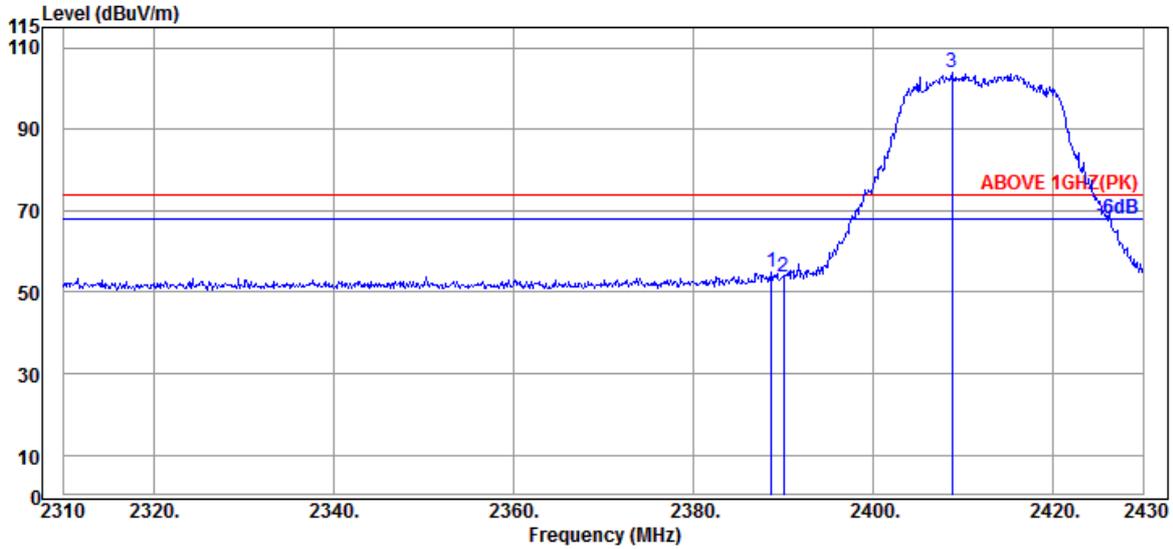

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	31.89	7.95	34.53	49.52	54.83	74.00	19.17	Peak
2390.040	31.89	7.95	34.54	48.25	53.55	74.00	20.45	Peak
@ 2408.760	31.87	7.96	34.54	98.53	103.82	---	---	Peak

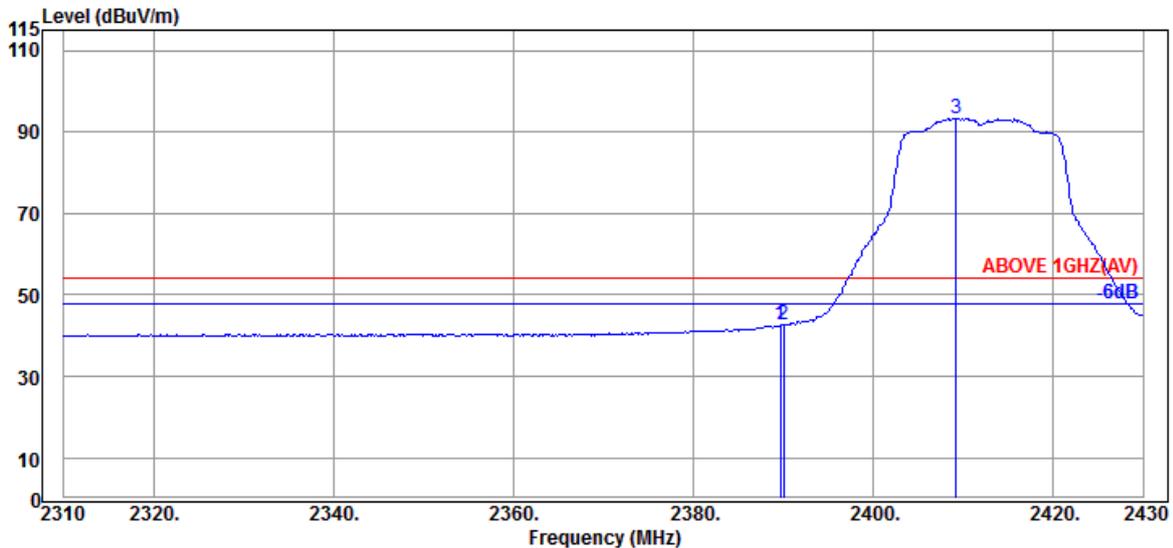


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.26	42.57	54.00	11.43	Average
2390.040	31.89	7.95	34.54	37.40	42.70	54.00	11.30	Average
@ 2409.240	31.87	7.96	34.54	88.09	93.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

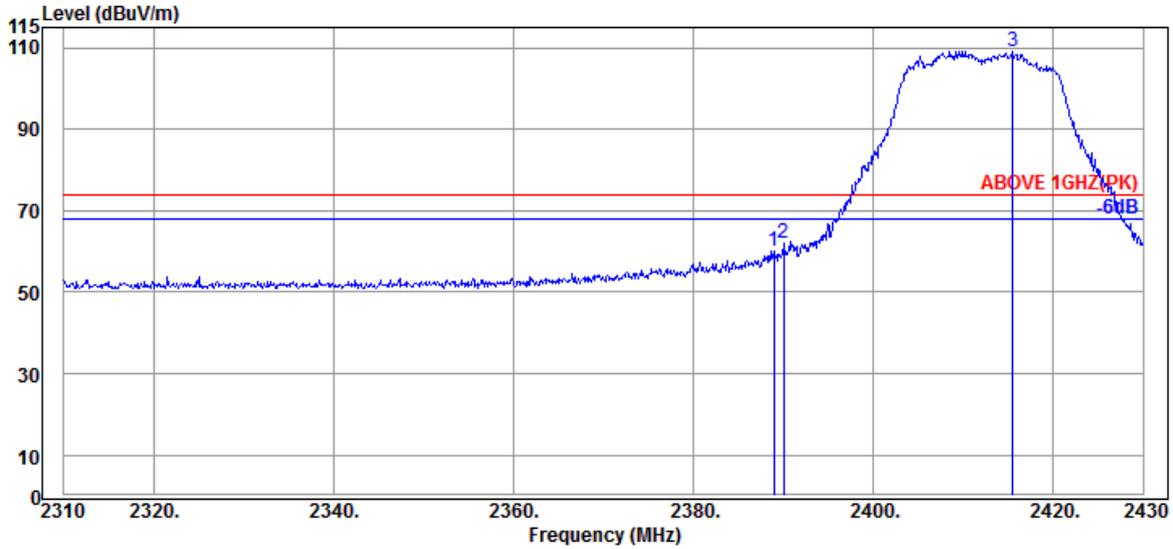

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	54.65	59.96	74.00	14.04	Peak
2390.040	31.89	7.95	34.54	56.59	61.89	74.00	12.11	Peak
@ 2415.480	31.94	7.96	34.54	103.75	109.11	---	---	Peak

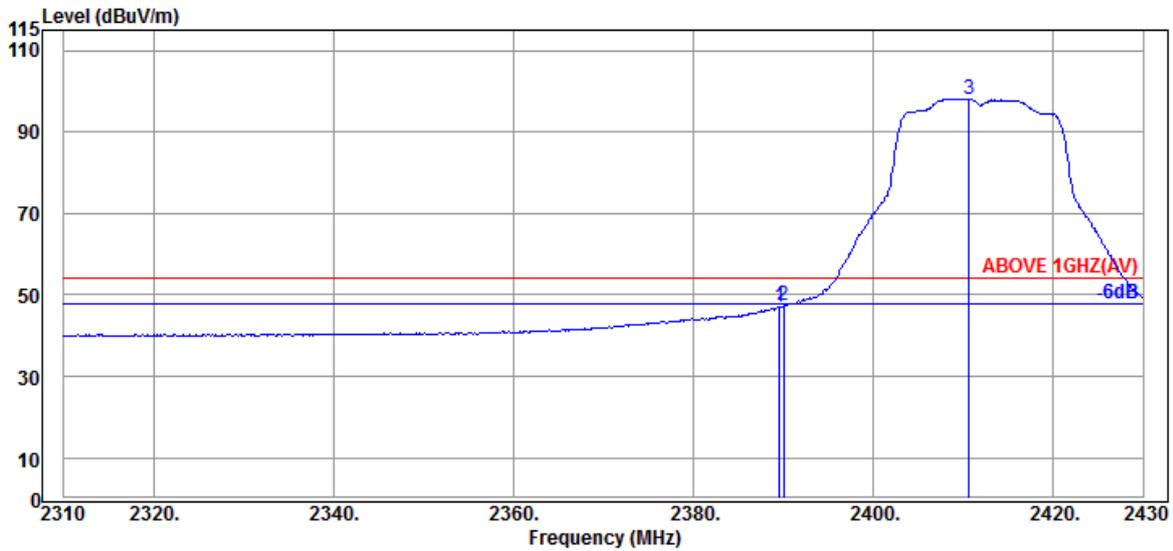


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	41.71	47.02	54.00	6.98	Average
2390.040	31.89	7.95	34.54	42.22	47.52	54.00	6.48	Average
@ 2410.680	31.87	7.96	34.54	92.86	98.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

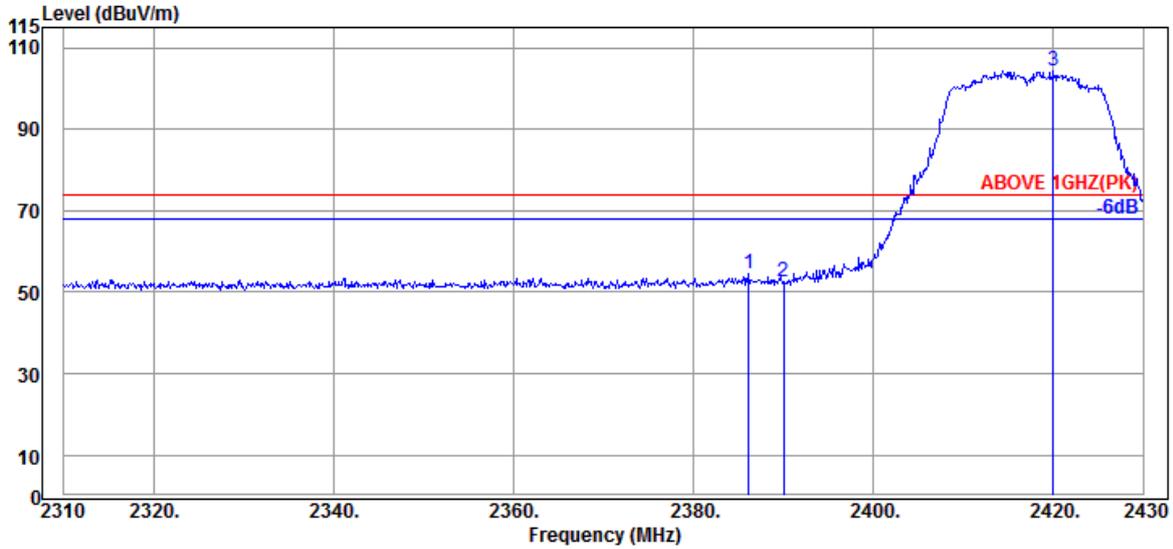

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	49.14	54.45	74.00	19.55	Peak
2390.040	31.89	7.95	34.54	47.19	52.49	74.00	21.51	Peak
@ 2420.040	32.01	7.96	34.54	98.82	104.25	---	---	Peak

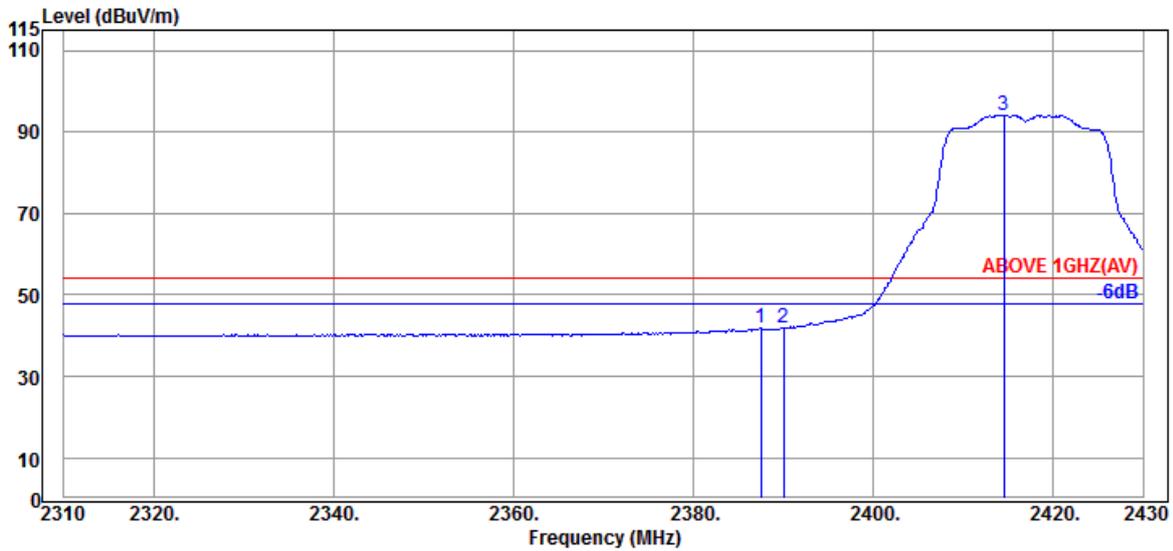


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.520	31.89	7.95	34.53	36.48	41.79	54.00	12.21	Average
2390.040	31.89	7.95	34.54	36.41	41.71	54.00	12.29	Average
@ 2414.520	31.94	7.96	34.54	88.86	94.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

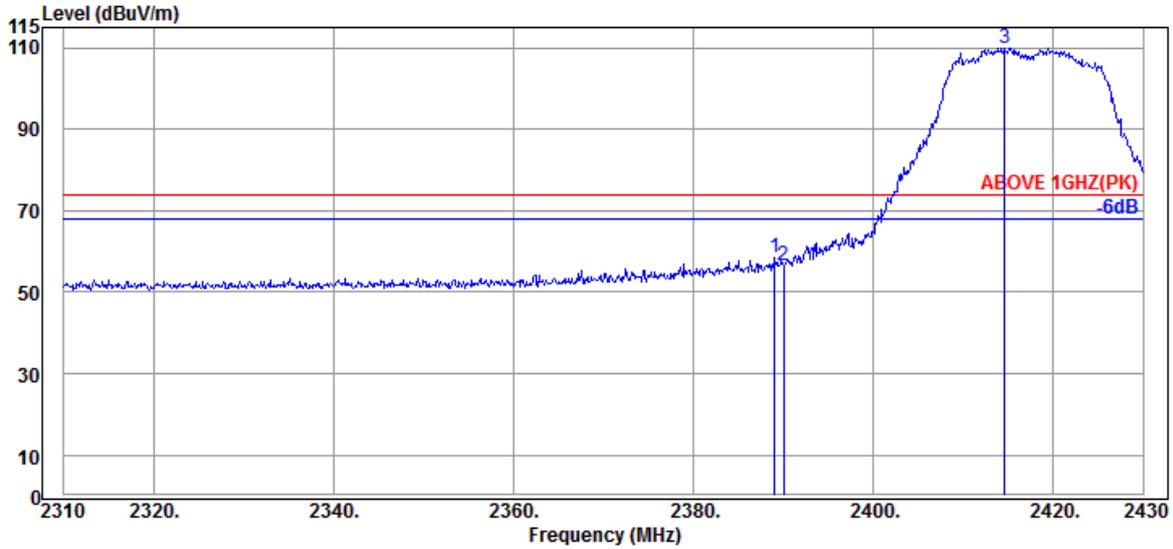

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	31.89	7.95	34.53	53.29	58.60	74.00	15.40	Peak
2390.040	31.89	7.95	34.54	51.40	56.70	74.00	17.30	Peak
@ 2414.640	31.94	7.96	34.54	104.63	109.99	---	---	Peak

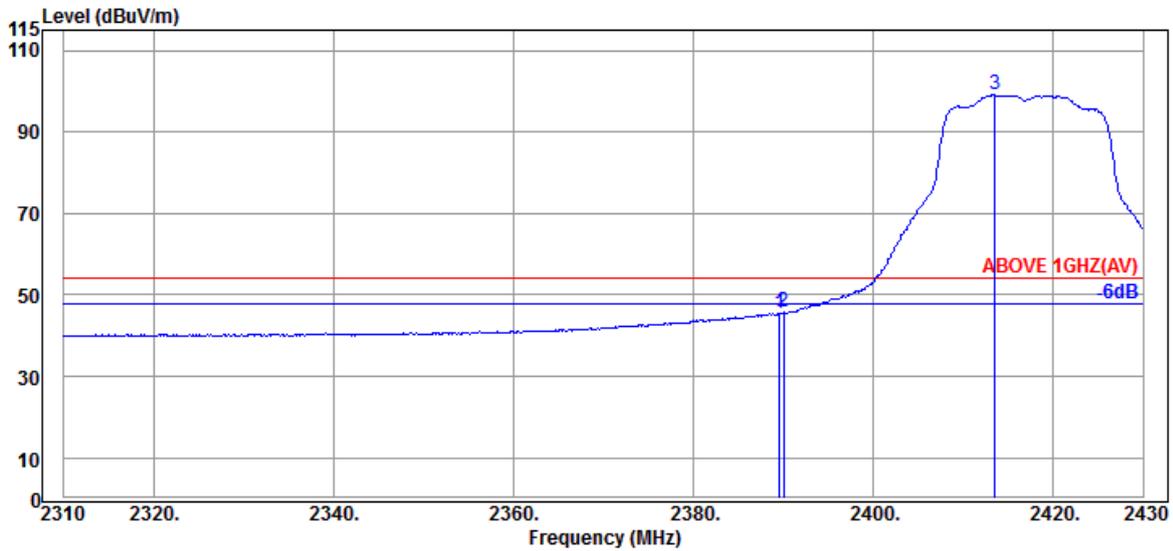


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	40.31	45.62	54.00	8.38	Average
2390.040	31.89	7.95	34.54	40.57	45.87	54.00	8.13	Average
@ 2413.560	31.94	7.96	34.54	93.74	99.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

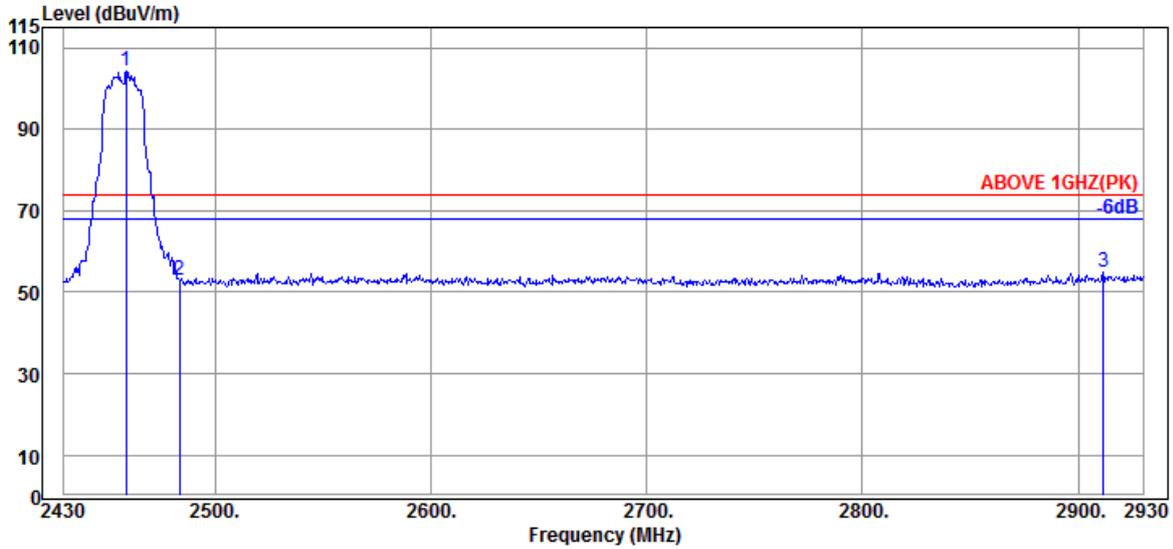

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.000	32.30	7.98	34.55	98.43	104.16	---	---	Peak
	2483.500	32.30	7.99	34.55	47.04	52.78	74.00	21.22	Peak
	2911.500	32.83	8.18	34.64	48.42	54.79	74.00	19.21	Peak

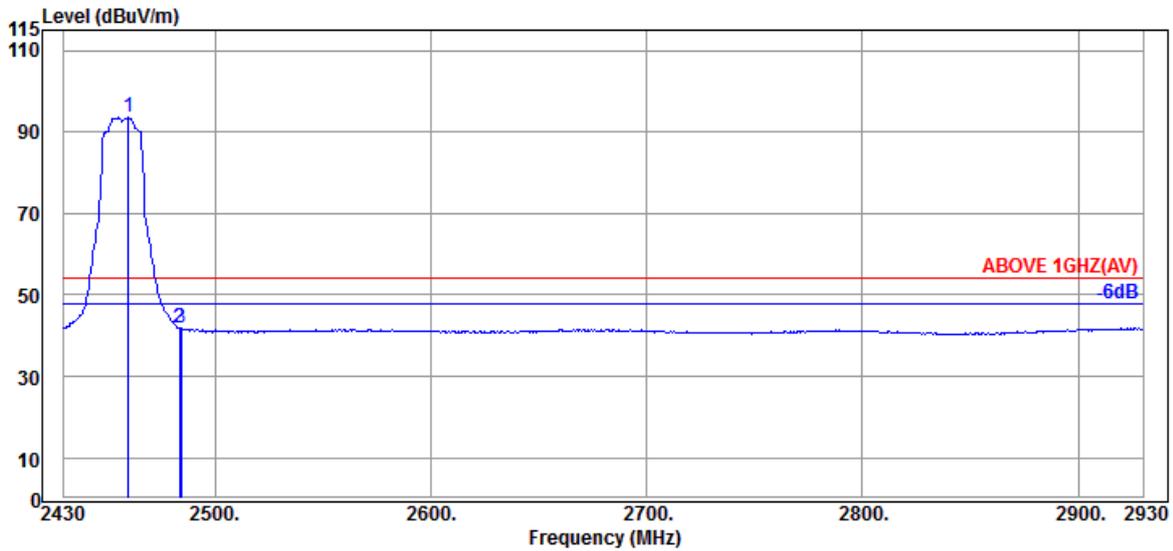


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.000	32.30	7.98	34.55	88.02	93.75	---	---	Average
	2483.500	32.30	7.99	34.55	35.98	41.72	54.00	12.28	Average
	2484.500	32.30	7.99	34.55	36.07	41.81	54.00	12.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

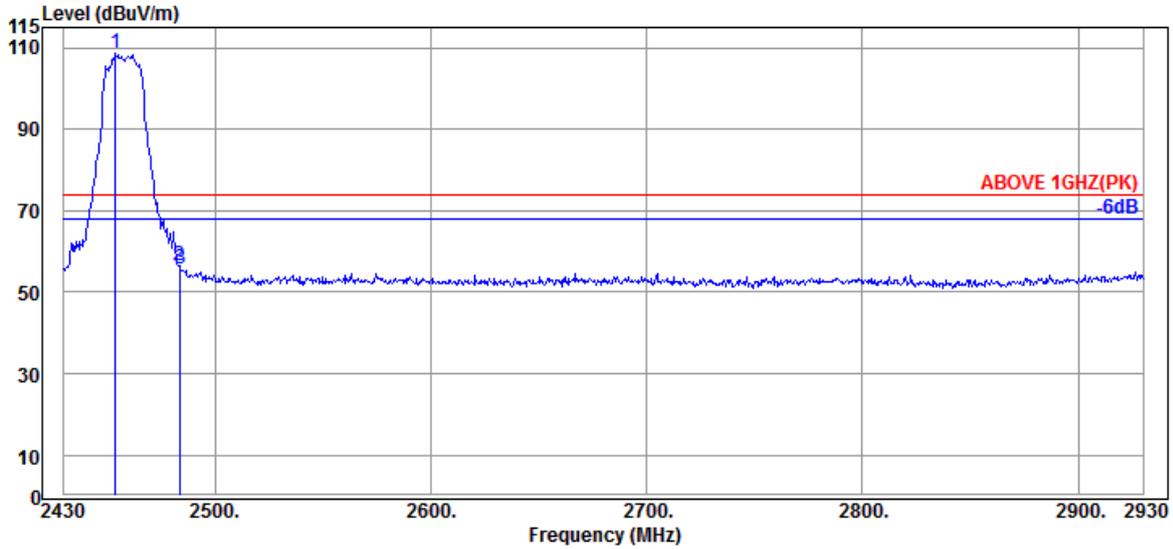

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.000	32.30	7.98	34.55	102.86	108.59	---	---	Peak
	2483.500	32.30	7.99	34.55	50.83	56.57	74.00	17.43	Peak
	2484.000	32.30	7.99	34.55	49.89	55.63	74.00	18.37	Peak

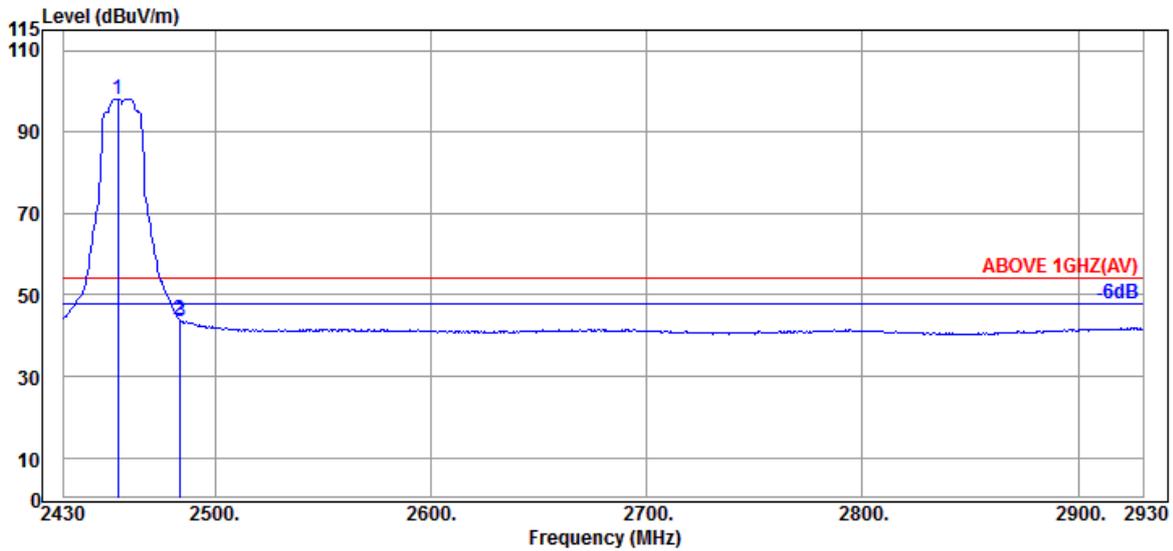


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.000	32.30	7.98	34.55	92.44	98.17	---	---	Average
	2483.500	32.30	7.99	34.55	38.04	43.78	54.00	10.22	Average
	2484.000	32.30	7.99	34.55	37.90	43.64	54.00	10.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

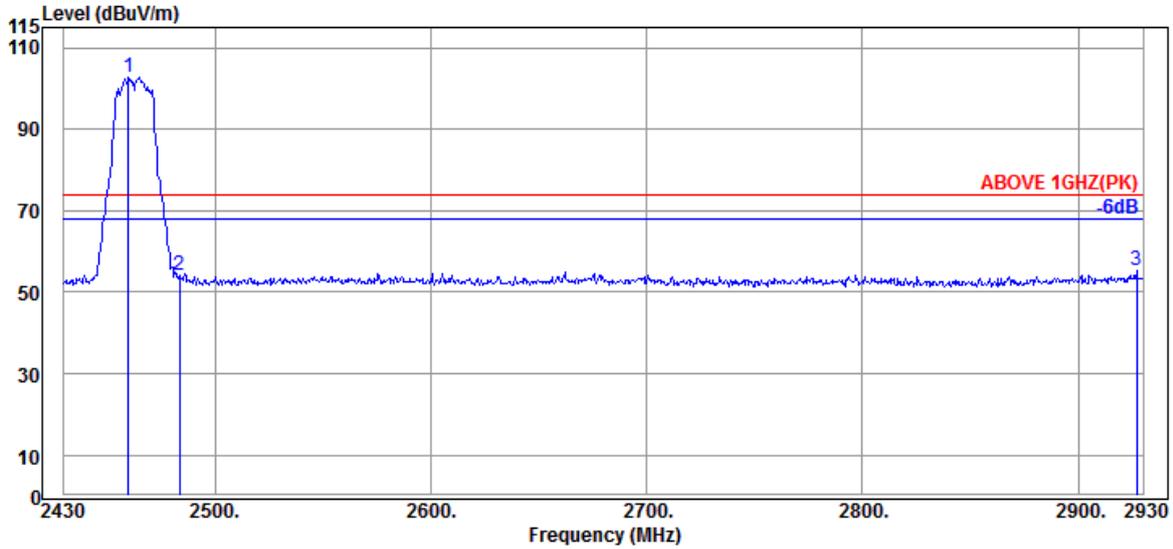

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	32.30	7.98	34.55	96.94	102.67	---	---	Peak
2483.500	32.30	7.99	34.55	48.42	54.16	74.00	19.84	Peak
2927.000	32.97	8.19	34.65	48.72	55.23	74.00	18.77	Peak

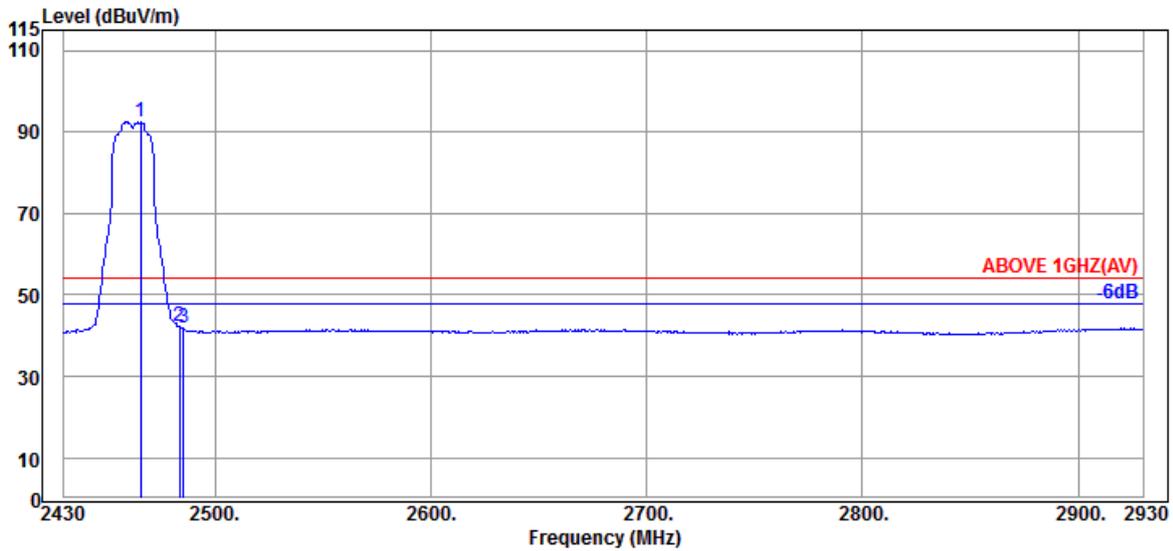


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	86.76	92.49	---	---	Average
2483.500	32.30	7.99	34.55	36.44	42.18	54.00	11.82	Average
2485.500	32.30	7.99	34.55	36.28	42.02	54.00	11.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

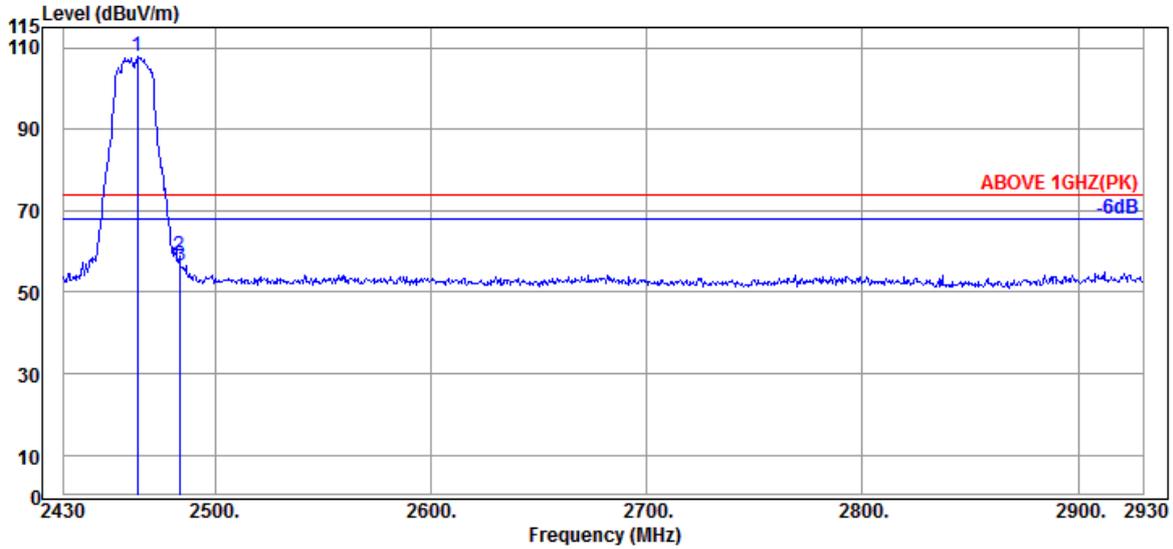

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	101.99	107.72	---	---	Peak
2483.500	32.30	7.99	34.55	53.29	59.03	74.00	14.97	Peak
2484.000	32.30	7.99	34.55	50.95	56.69	74.00	17.31	Peak

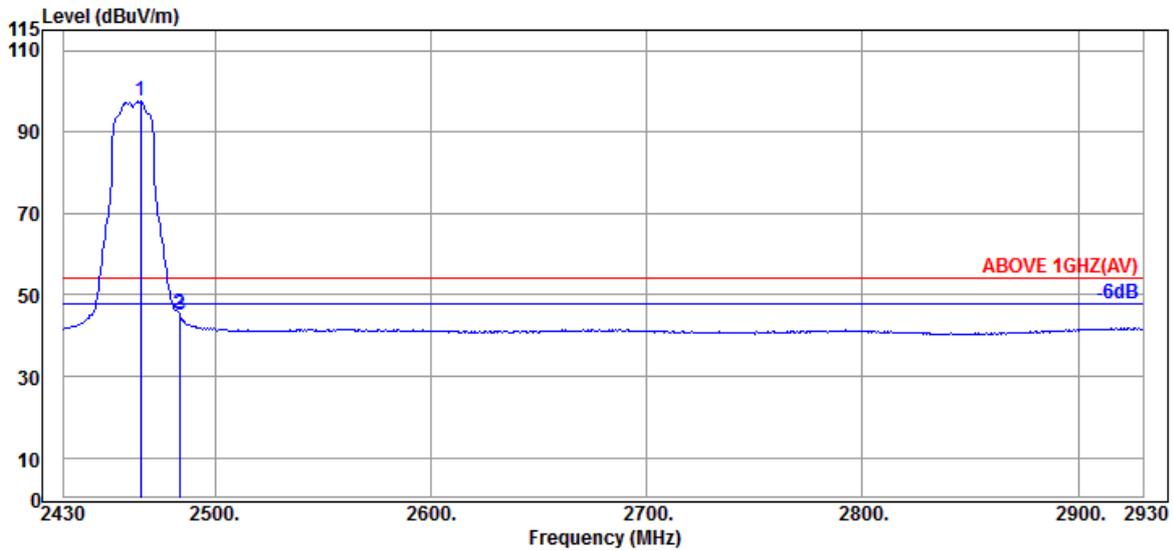


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	91.78	97.51	---	---	Average
2483.500	32.30	7.99	34.55	39.72	45.46	54.00	8.54	Average
2484.000	32.30	7.99	34.55	39.21	44.95	54.00	9.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

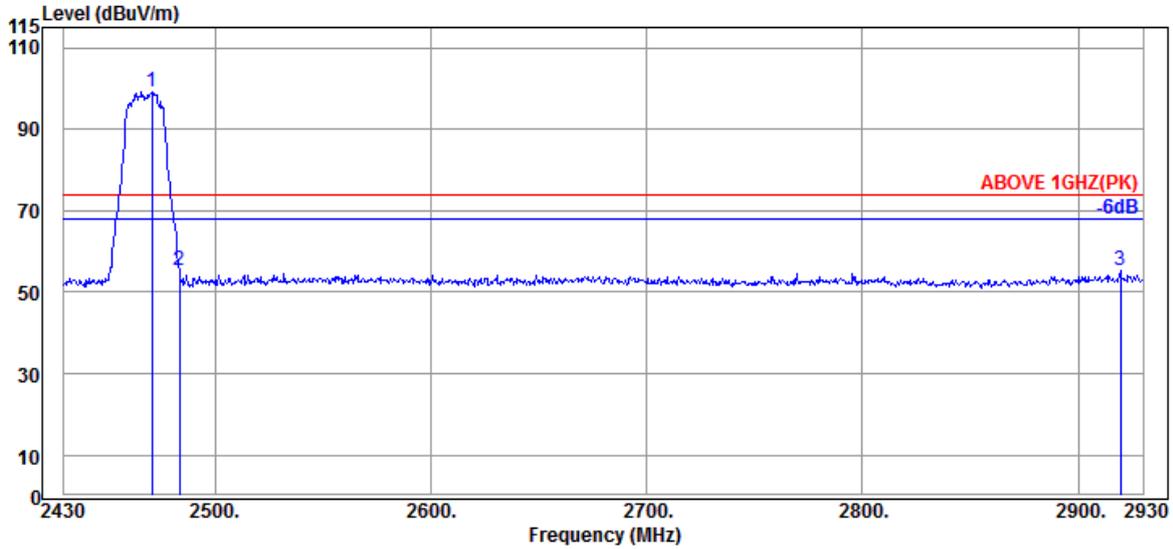

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	93.37	99.11	---	---	Peak
2483.500	32.30	7.99	34.55	49.53	55.27	74.00	18.73	Peak
2919.500	32.90	8.19	34.64	48.88	55.33	74.00	18.67	Peak

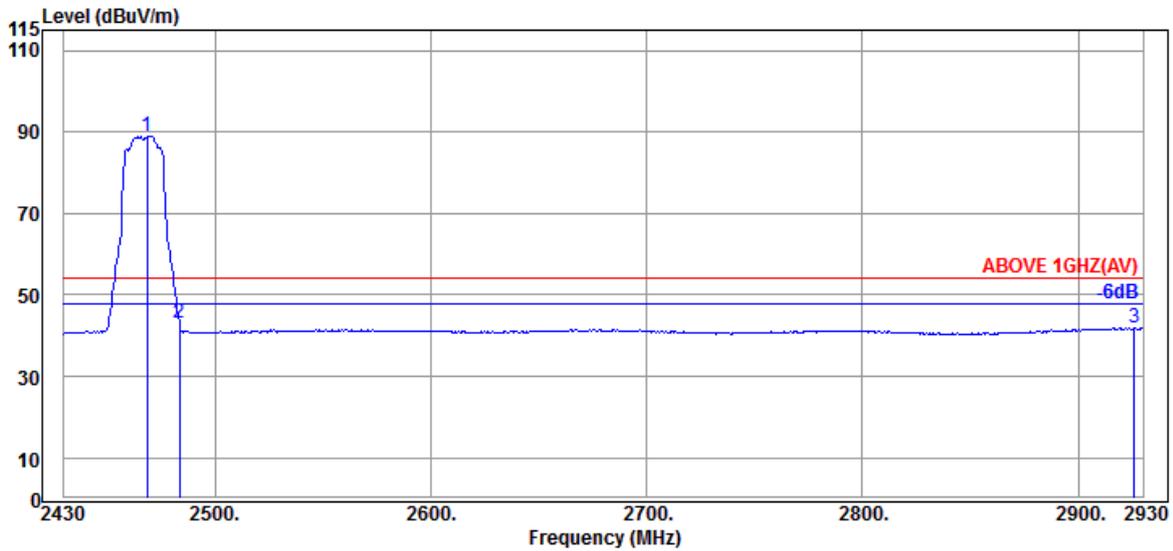


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	83.37	89.10	---	---	Average
2483.500	32.30	7.99	34.55	37.34	43.08	54.00	10.92	Average
2926.000	32.90	8.19	34.65	35.43	41.87	54.00	12.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

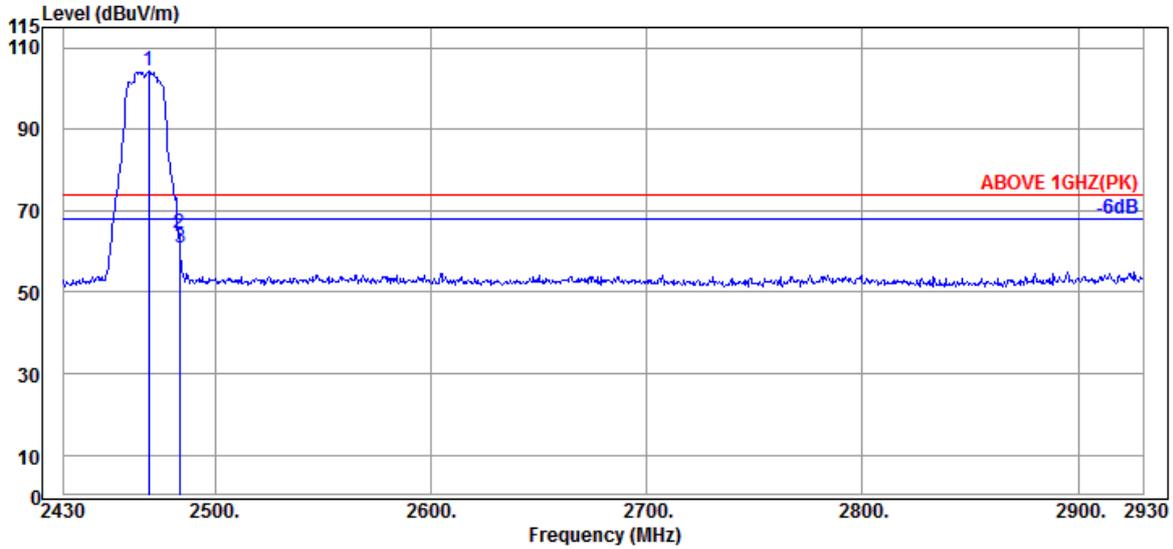

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.500	32.30	7.98	34.55	98.43	104.16	---	---	Peak
	2483.500	32.30	7.99	34.55	58.57	64.31	74.00	9.69	Peak
	2484.000	32.30	7.99	34.55	54.97	60.71	74.00	13.29	Peak

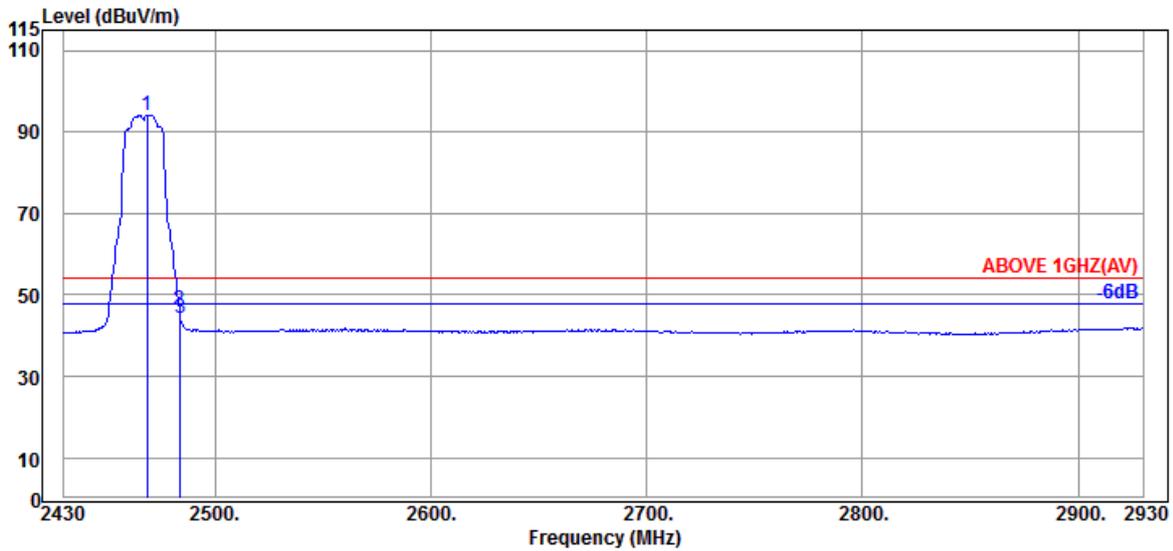


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.500	32.30	7.98	34.55	88.42	94.15	---	---	Average
	2483.500	32.30	7.99	34.55	40.60	46.34	54.00	7.66	Average
	2484.000	32.30	7.99	34.55	38.72	44.46	54.00	9.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

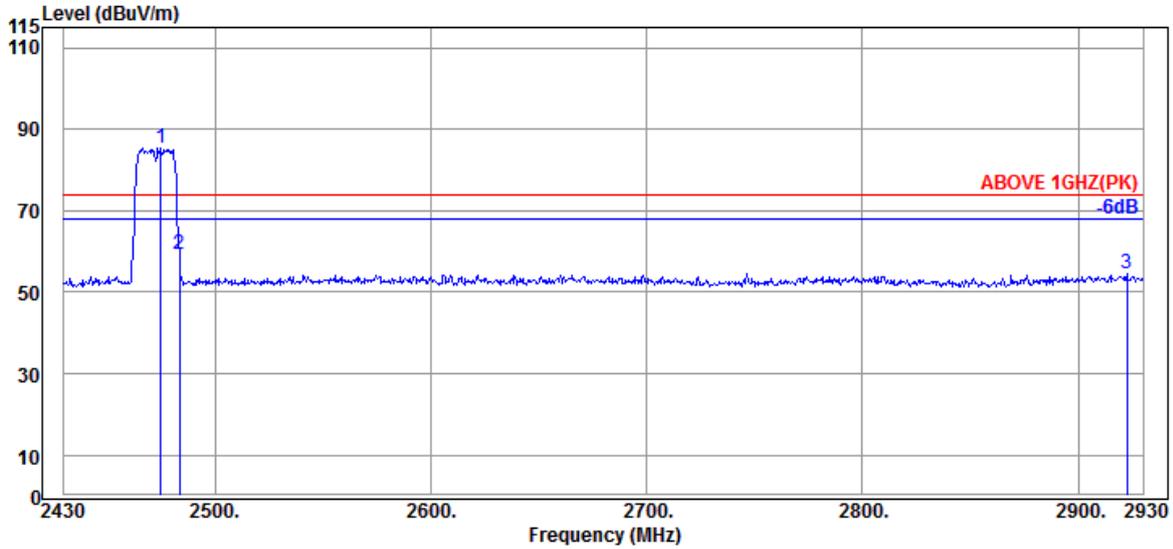

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	32.30	7.99	34.55	79.72	85.46	---	---	Peak
2483.500	32.30	7.99	34.55	53.34	59.08	74.00	14.92	Peak
2922.500	32.90	8.19	34.64	48.16	54.61	74.00	19.39	Peak

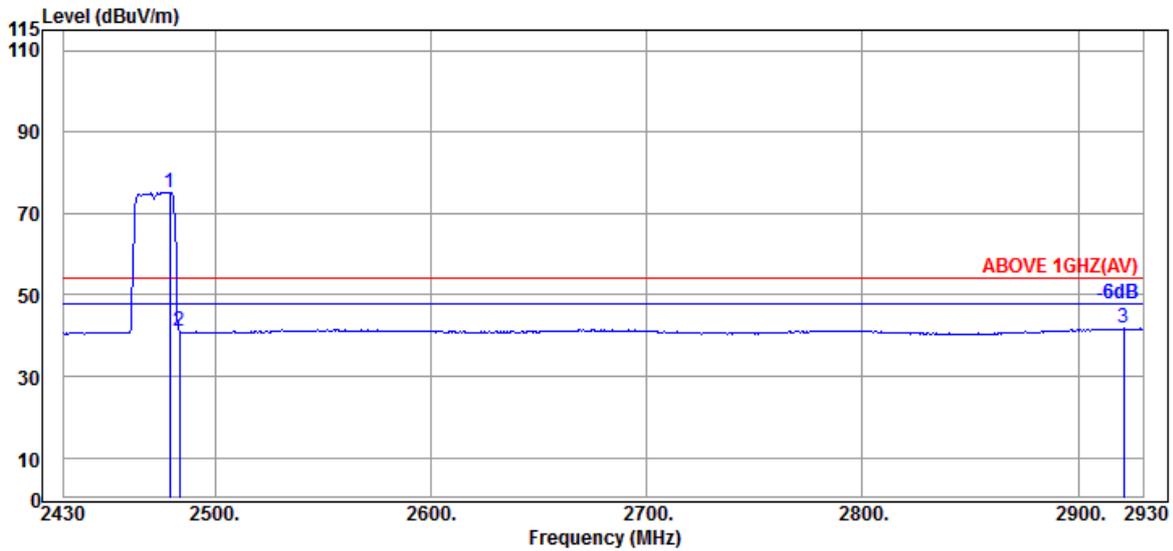


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	69.52	75.26	---	---	Average
2483.500	32.30	7.99	34.55	35.43	41.17	54.00	12.83	Average
2921.000	32.90	8.19	34.64	35.42	41.87	54.00	12.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

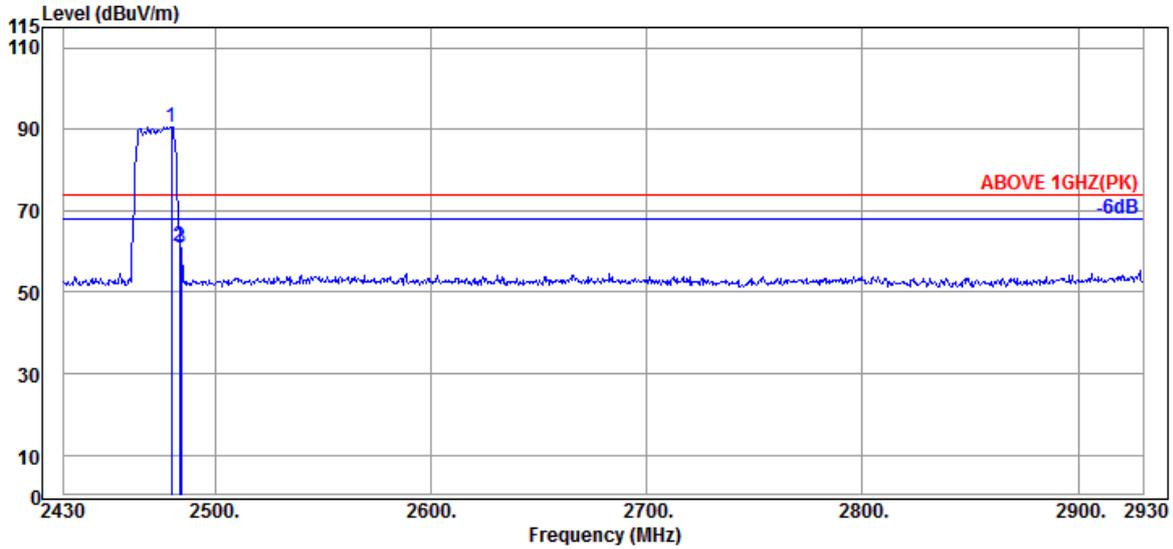

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	84.89	90.63	---	---	Peak
2483.500	32.30	7.99	34.55	55.58	61.32	74.00	12.68	Peak
2484.500	32.30	7.99	34.55	55.04	60.78	74.00	13.22	Peak

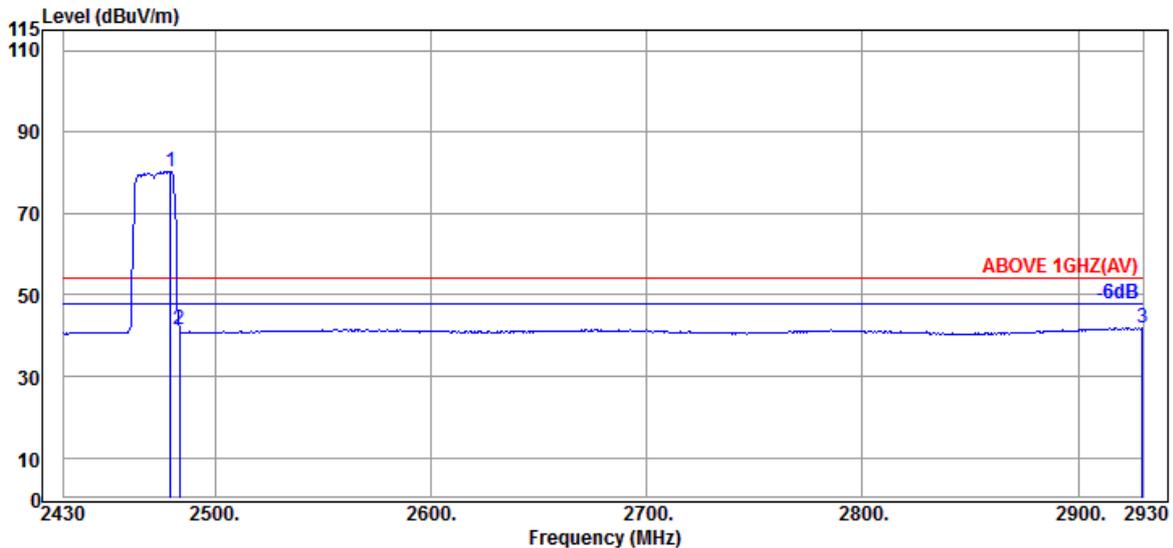


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	74.55	80.29	---	---	Average
2483.500	32.30	7.99	34.55	35.80	41.54	54.00	12.46	Average
2929.500	32.97	8.19	34.65	35.33	41.84	54.00	12.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

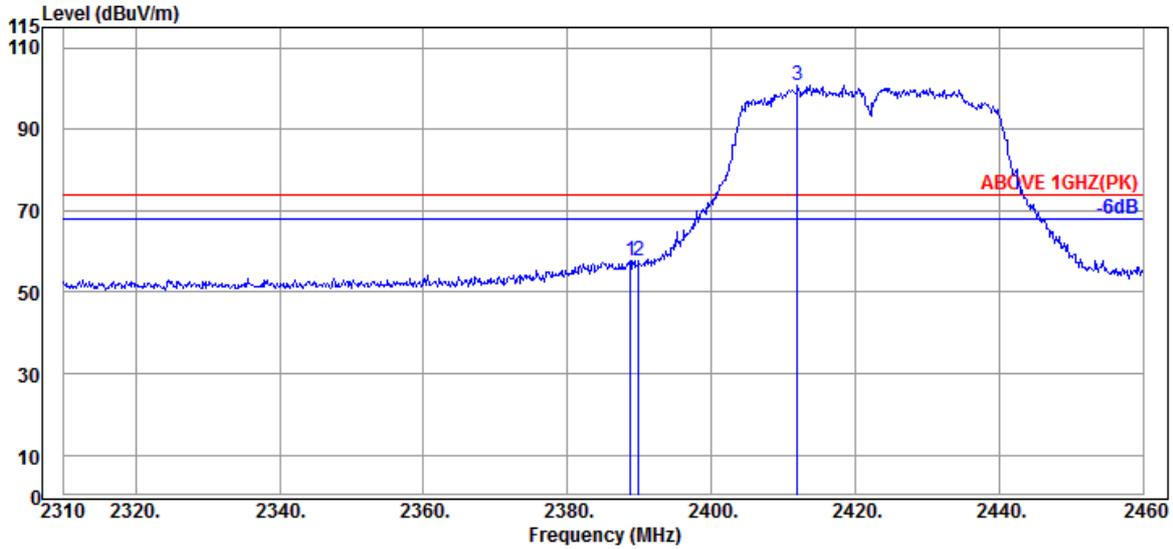

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	7.95	34.53	52.37	57.68	74.00	16.32	Peak
2389.950	31.89	7.95	34.54	52.31	57.61	74.00	16.39	Peak
@ 2412.000	31.94	7.96	34.54	95.31	100.67	---	---	Peak

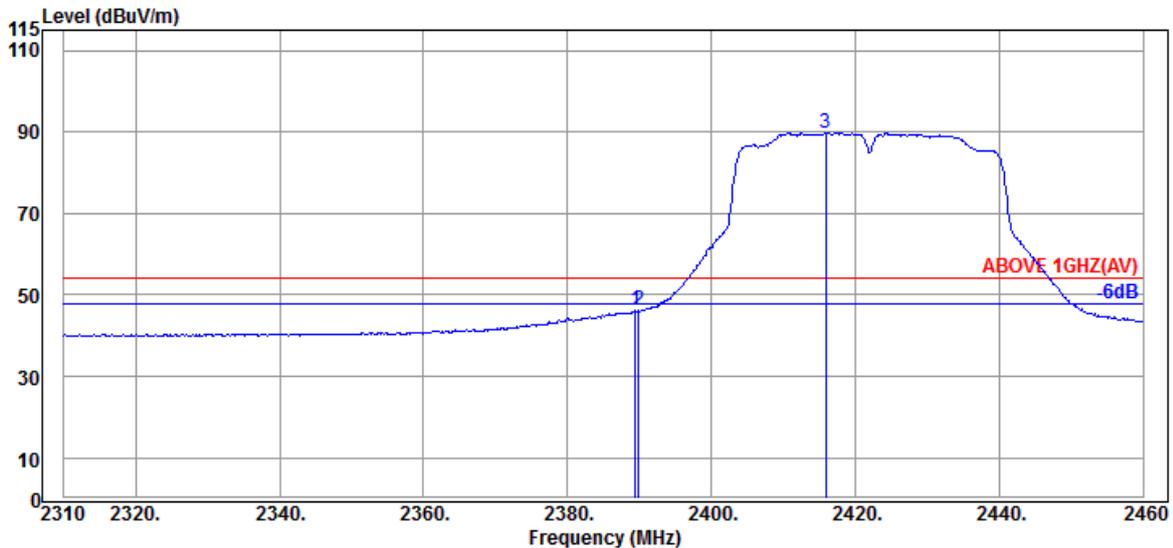


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	40.84	46.15	54.00	7.85	Average
2389.950	31.89	7.95	34.54	40.84	46.14	54.00	7.86	Average
@ 2415.900	31.94	7.96	34.54	84.49	89.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

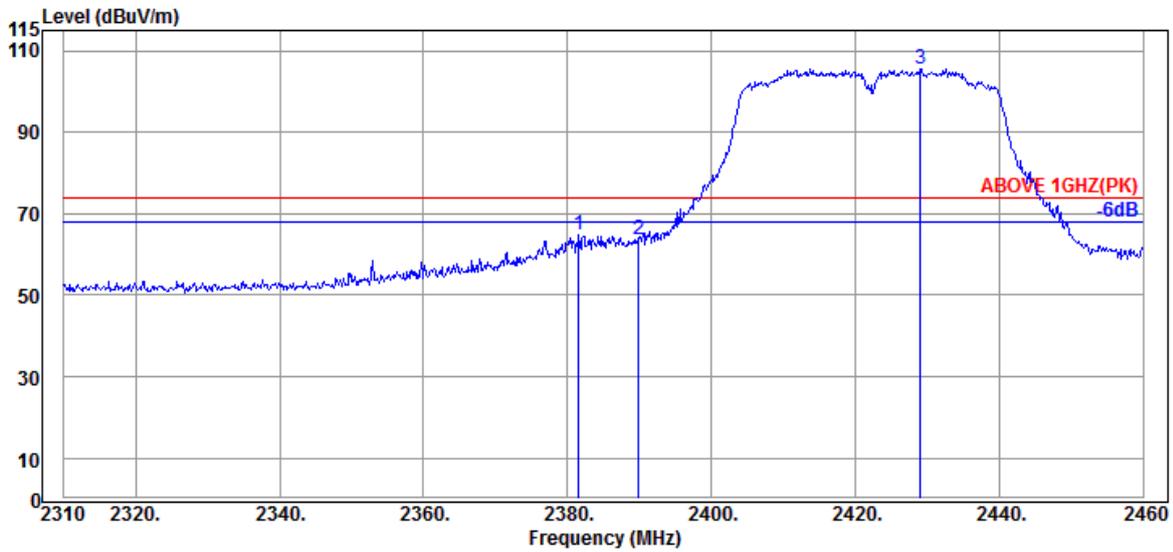

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.550	31.93	7.95	34.53	59.40	64.75	74.00	9.25	Peak
2389.950	31.89	7.95	34.54	58.40	63.70	74.00	10.30	Peak
@ 2429.100	32.09	7.97	34.54	100.08	105.60	---	---	Peak

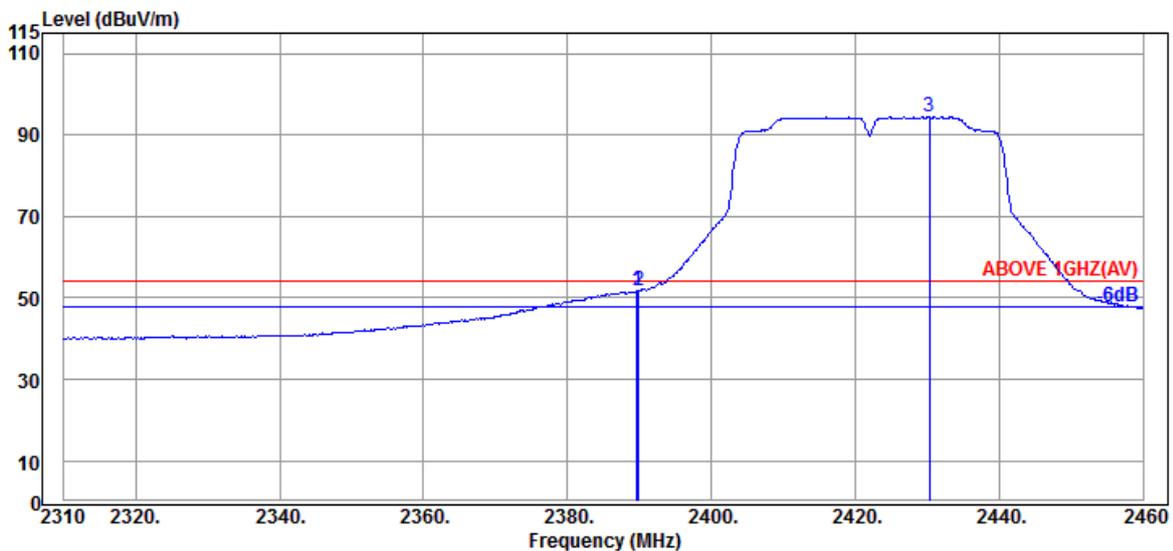


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	46.32	51.63	54.00	2.37	Average
2389.950	31.89	7.95	34.54	46.37	51.67	54.00	2.33	Average
@ 2430.300	32.09	7.97	34.54	89.03	94.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

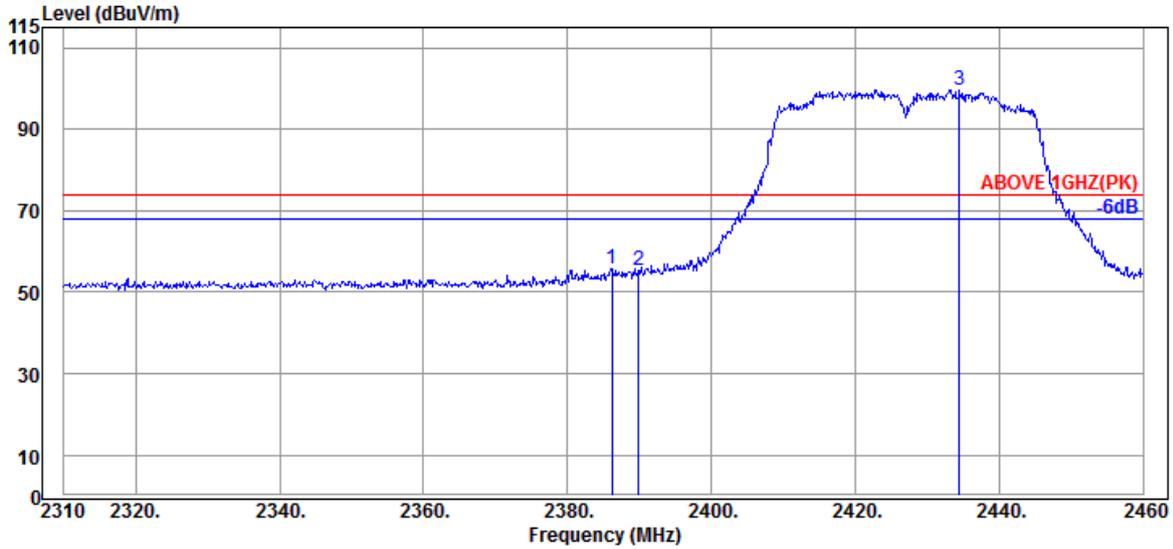

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	50.48	55.79	74.00	18.21	Peak
2389.950	31.89	7.95	34.54	50.03	55.33	74.00	18.67	Peak
@ 2434.500	32.16	7.97	34.54	94.18	99.77	---	---	Peak

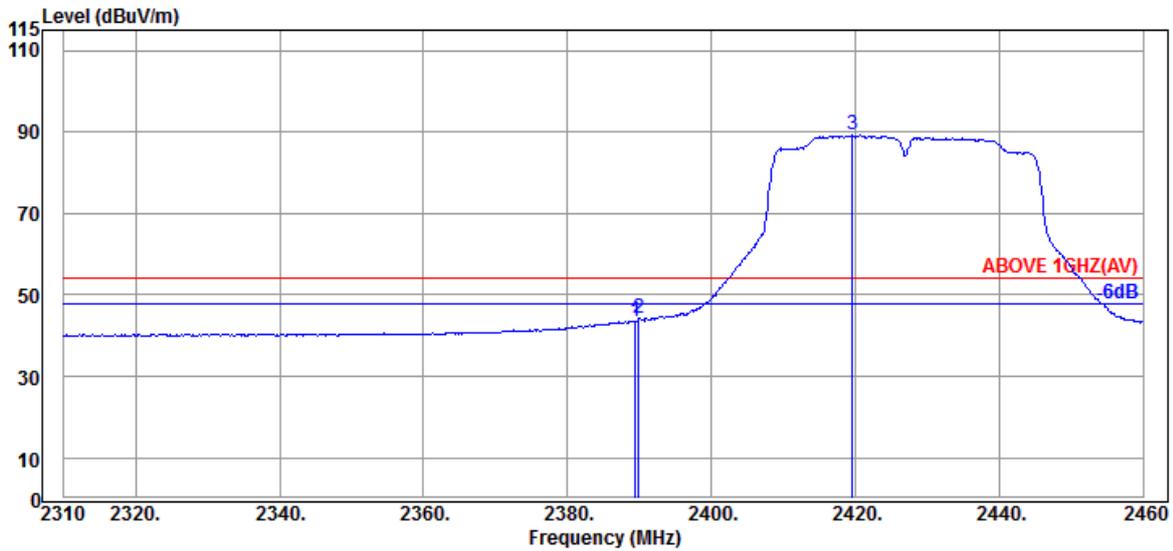


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	38.24	43.55	54.00	10.45	Average
2389.950	31.89	7.95	34.54	38.91	44.21	54.00	9.79	Average
@ 2419.650	32.01	7.96	34.54	83.80	89.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

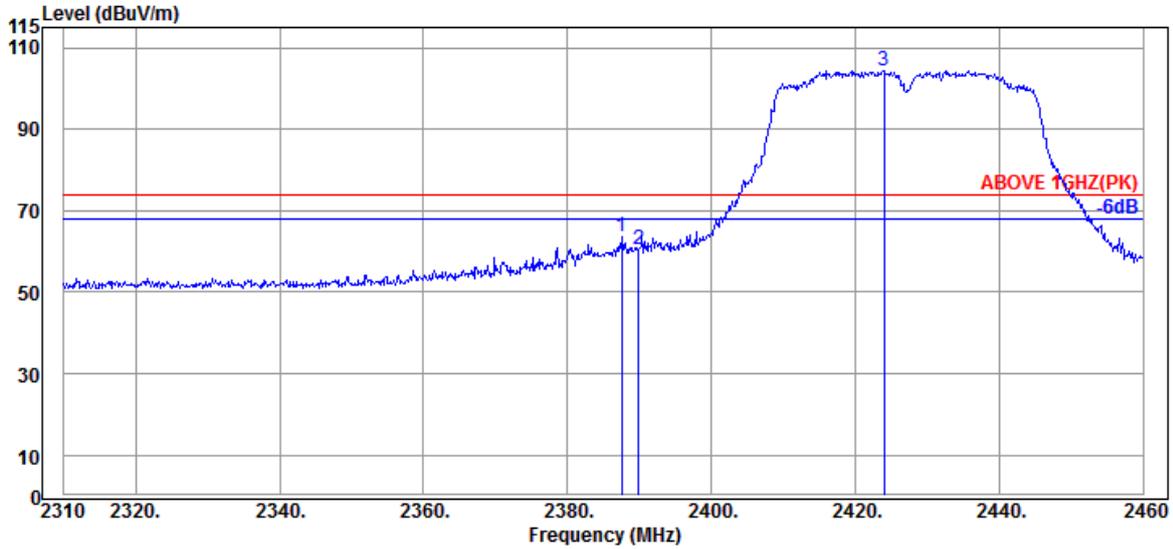

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	31.89	7.95	34.53	58.17	63.48	74.00	10.52	Peak
2389.950	31.89	7.95	34.54	54.99	60.29	74.00	13.71	Peak
@ 2424.000	32.01	7.97	34.54	98.99	104.43	---	---	Peak

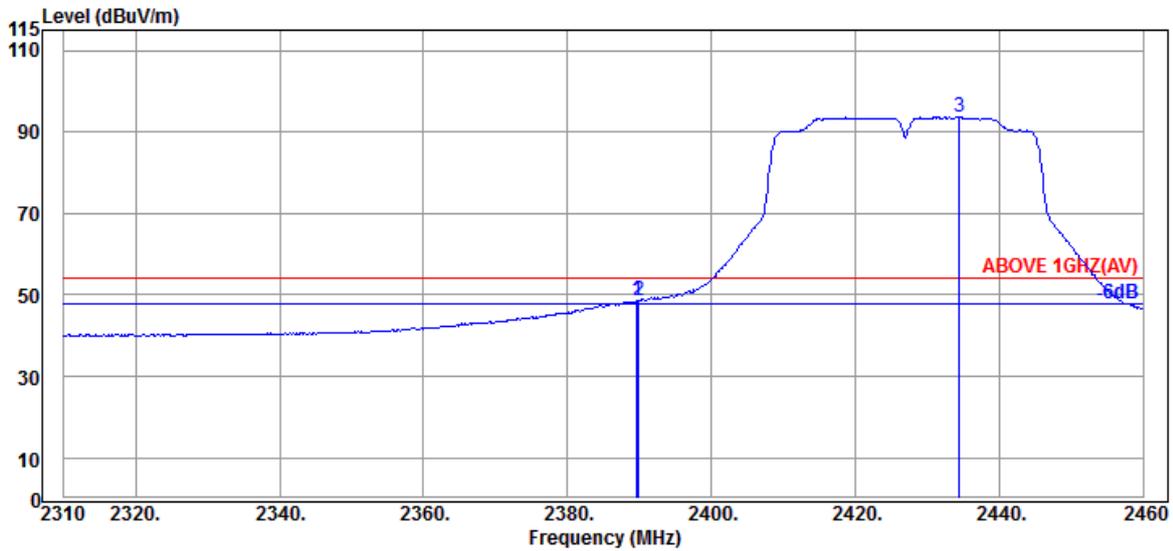


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	43.35	48.66	54.00	5.34	Average
2389.950	31.89	7.95	34.54	43.24	48.54	54.00	5.46	Average
@ 2434.500	32.16	7.97	34.54	88.26	93.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

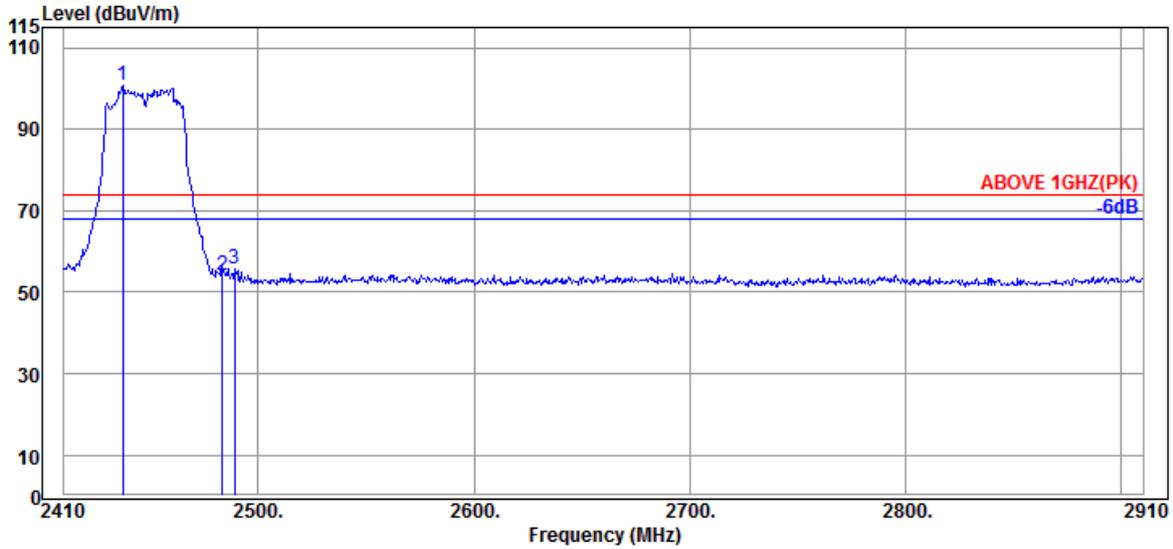

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2437.500	32.16	7.97	34.54	95.02	100.61	---	---	Peak
2483.500	32.30	7.99	34.55	48.33	54.07	74.00	19.93	Peak
2489.000	32.30	8.00	34.55	49.91	55.66	74.00	18.34	Peak

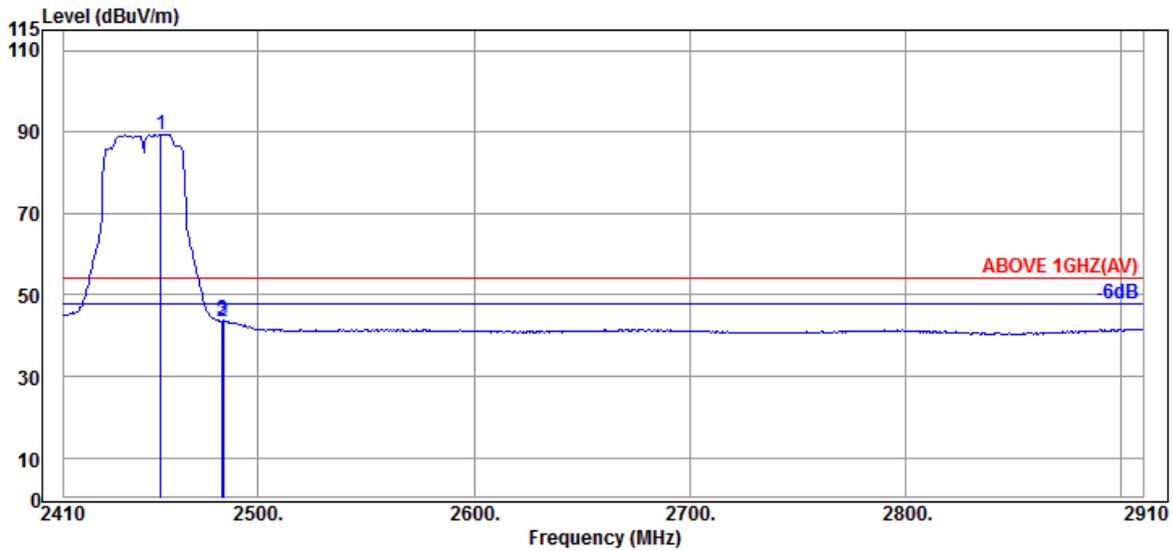


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	83.75	89.48	---	---	Average
2483.500	32.30	7.99	34.55	37.88	43.62	54.00	10.38	Average
2484.000	32.30	7.99	34.55	37.95	43.69	54.00	10.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

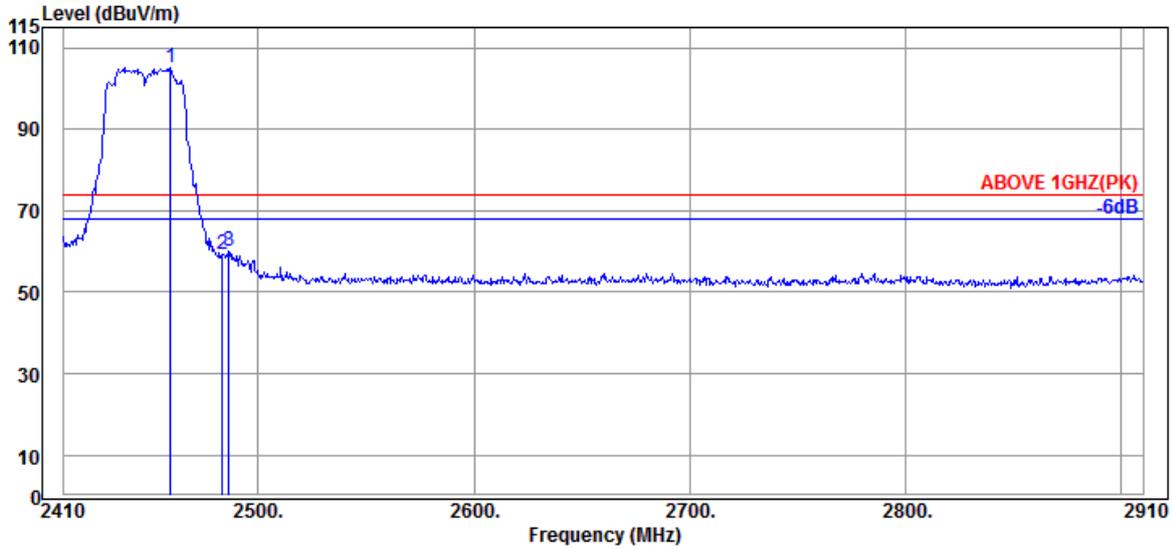

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.500	32.30	7.98	34.55	99.43	105.16	---	---	Peak
	2483.500	32.30	7.99	34.55	53.65	59.39	74.00	14.61	Peak
	2486.500	32.30	8.00	34.55	54.13	59.88	74.00	14.12	Peak

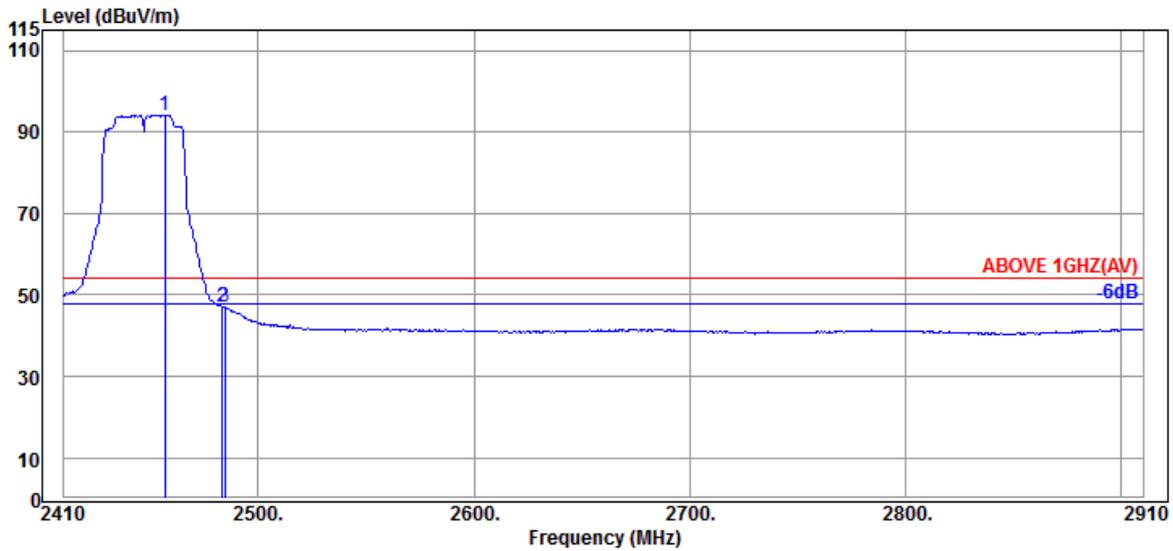


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.000	32.30	7.98	34.55	88.51	94.24	---	---	Average
	2483.500	32.30	7.99	34.55	41.18	46.92	54.00	7.08	Average
	2484.500	32.30	7.99	34.55	41.18	46.92	54.00	7.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

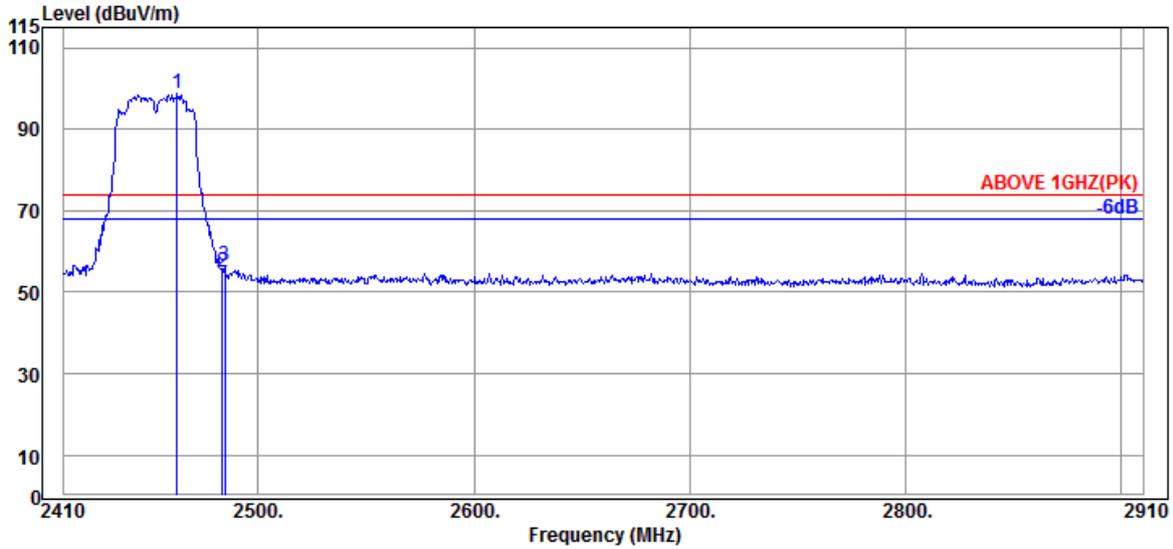

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	32.30	7.98	34.55	92.93	98.66	---	---	Peak
2483.500	32.30	7.99	34.55	49.19	54.93	74.00	19.07	Peak
2484.500	32.30	7.99	34.55	50.58	56.32	74.00	17.68	Peak

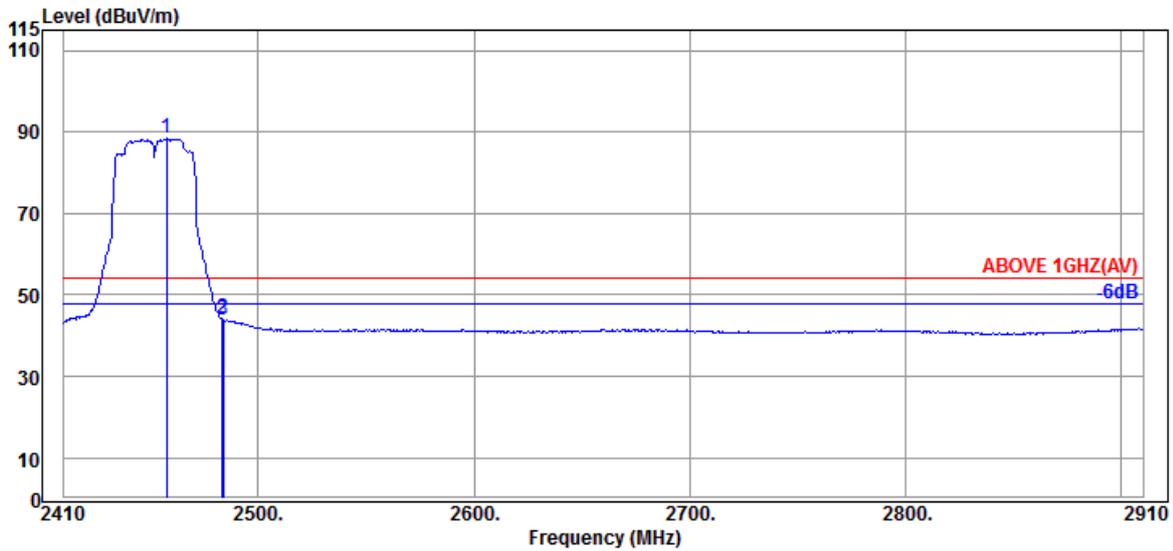


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	32.30	7.98	34.55	82.60	88.33	---	---	Average
2483.500	32.30	7.99	34.55	38.37	44.11	54.00	9.89	Average
2484.000	32.30	7.99	34.55	38.25	43.99	54.00	10.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

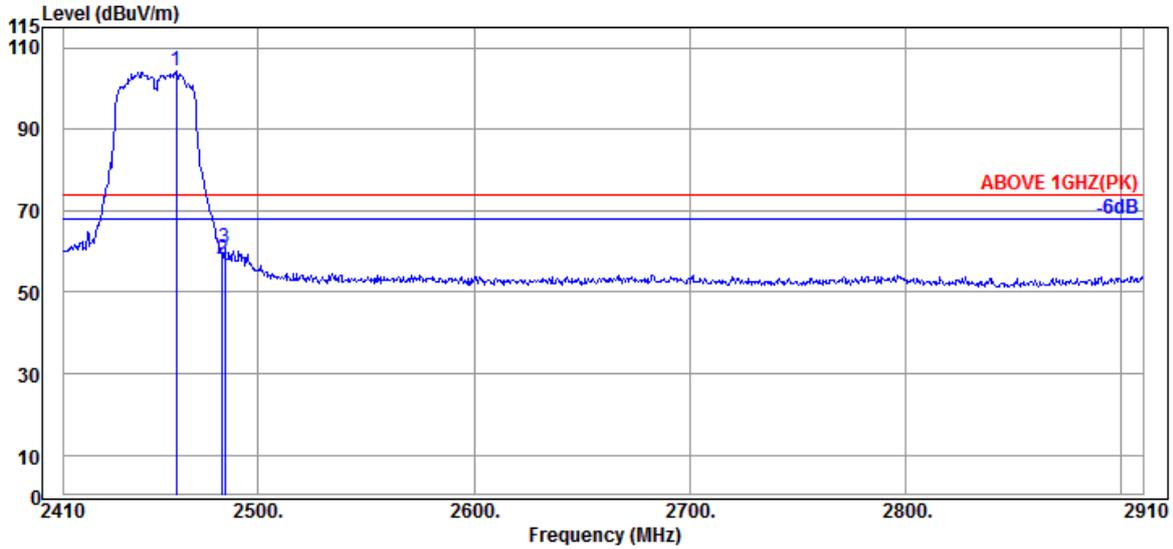

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.000	32.30	7.98	34.55	98.76	104.49	---	---	Peak
	2483.500	32.30	7.99	34.55	52.42	58.16	74.00	15.84	Peak
	2484.500	32.30	7.99	34.55	55.02	60.76	74.00	13.24	Peak

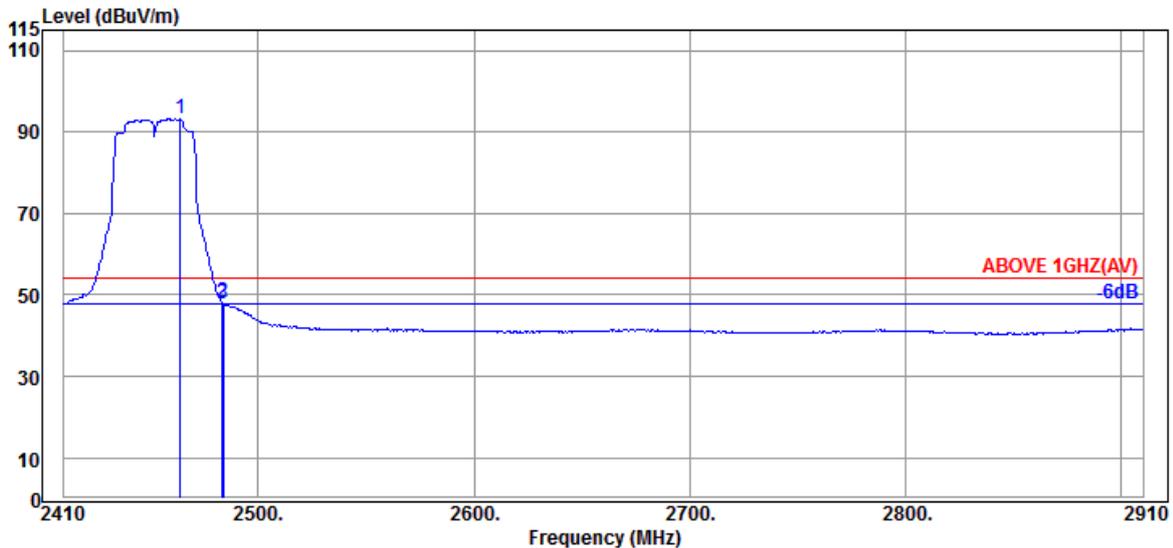


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.000	32.30	7.98	34.55	87.57	93.30	---	---	Average
	2483.500	32.30	7.99	34.55	42.58	48.32	54.00	5.68	Average
	2484.000	32.30	7.99	34.55	42.21	47.95	54.00	6.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

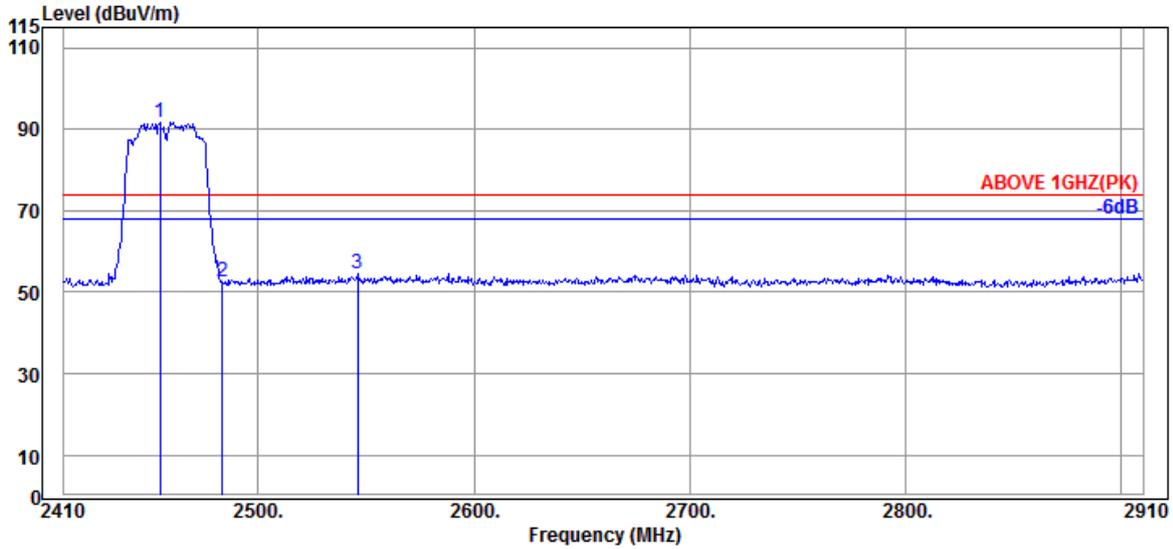

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.500	32.30	7.98	34.55	86.09	91.82	---	---	Peak
	2483.500	32.30	7.99	34.55	47.01	52.75	74.00	21.25	Peak
	2546.000	32.47	8.02	34.57	48.59	54.51	74.00	19.49	Peak

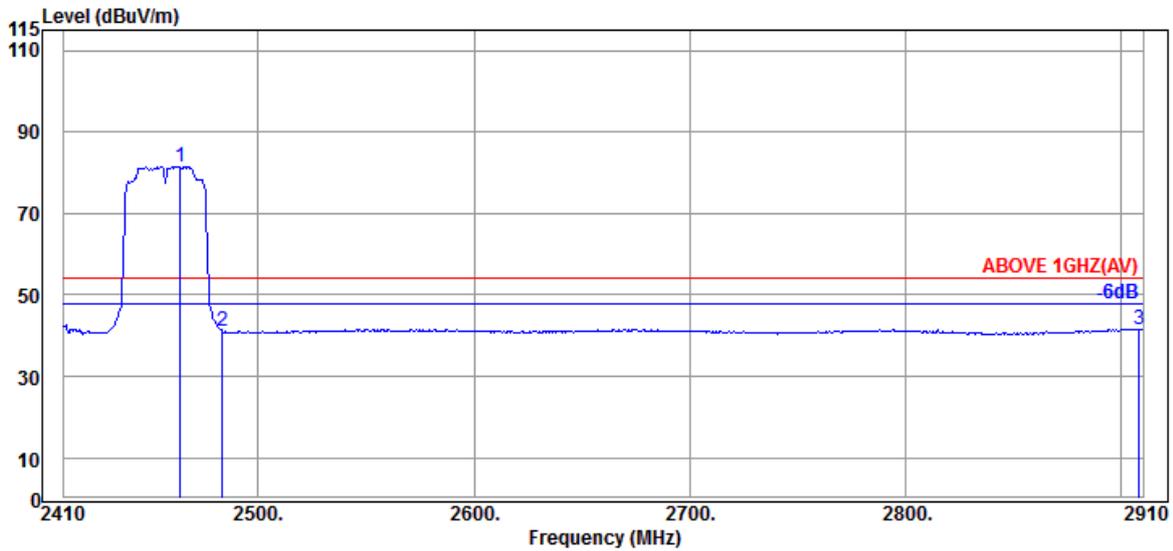


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.000	32.30	7.98	34.55	75.80	81.53	---	---	Average
	2483.500	32.30	7.99	34.55	35.41	41.15	54.00	12.85	Average
	2908.000	32.77	8.18	34.64	35.34	41.65	54.00	12.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

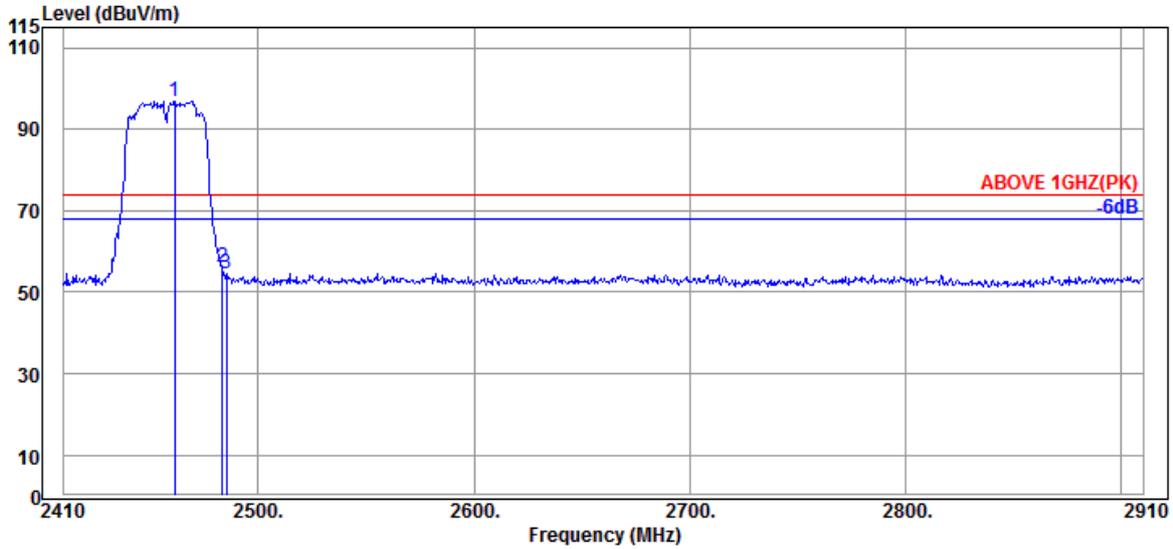

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	91.17	96.90	---	---	Peak
2483.500	32.30	7.99	34.55	50.36	56.10	74.00	17.90	Peak
2485.500	32.30	7.99	34.55	48.93	54.67	74.00	19.33	Peak

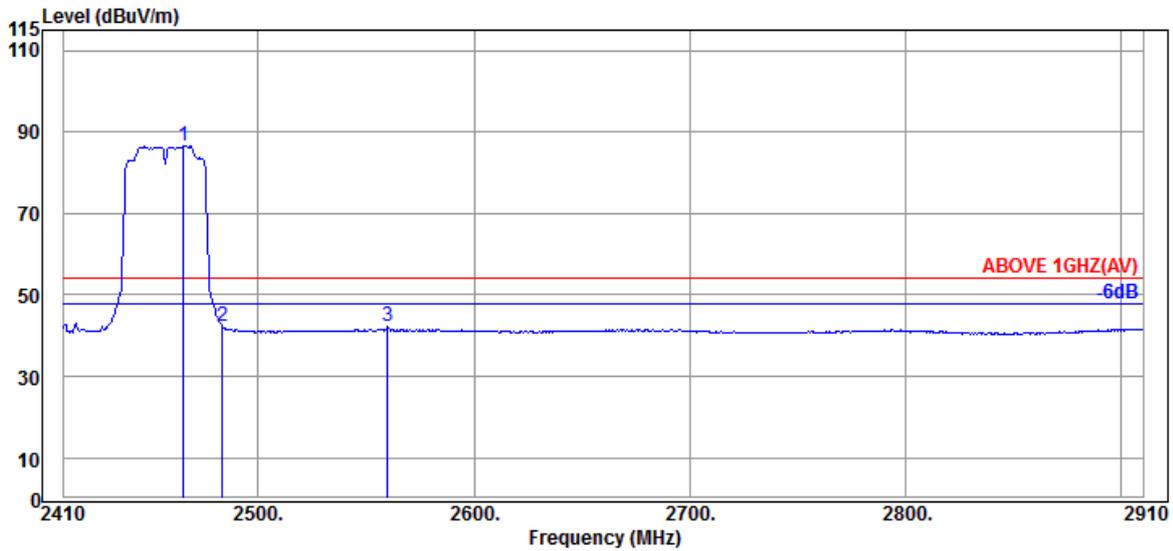


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	80.84	86.57	---	---	Average
2483.500	32.30	7.99	34.55	36.36	42.10	54.00	11.90	Average
2560.000	32.50	8.03	34.57	36.24	42.20	54.00	11.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

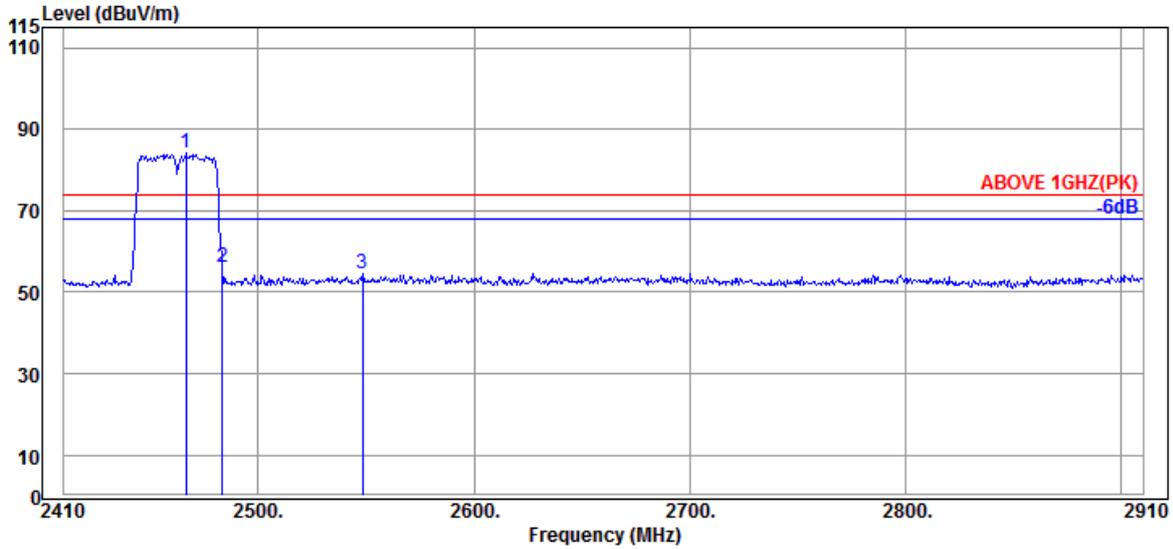

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	78.50	84.23	---	---	Peak
2483.500	32.30	7.99	34.55	50.55	56.29	74.00	17.71	Peak
2548.500	32.50	8.02	34.57	48.77	54.72	74.00	19.28	Peak

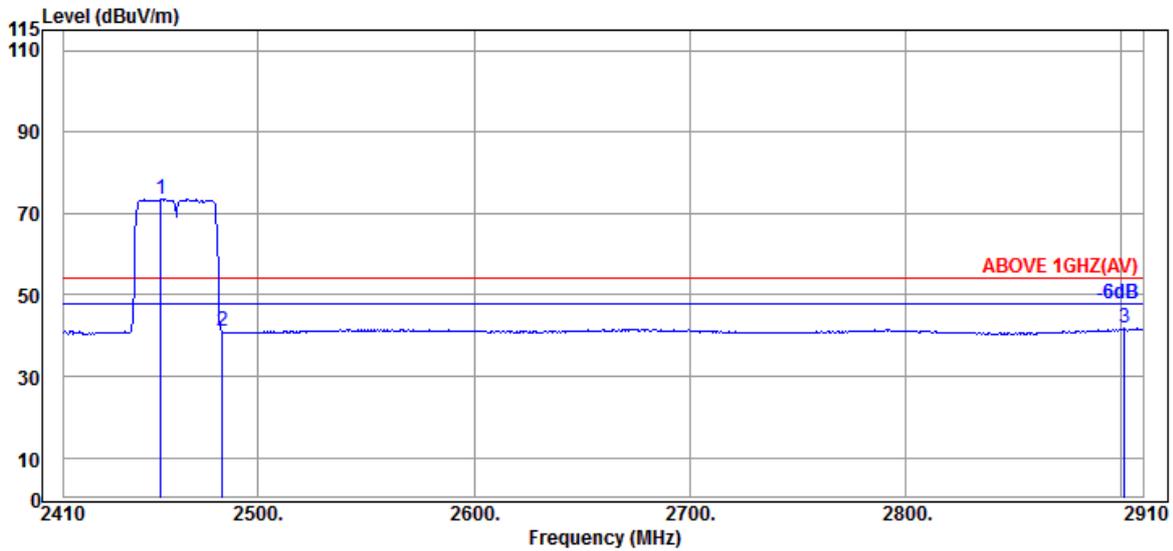


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	67.85	73.58	---	---	Average
2483.500	32.30	7.99	34.55	35.16	40.90	54.00	13.10	Average
2901.500	32.77	8.18	34.64	35.43	41.74	54.00	12.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

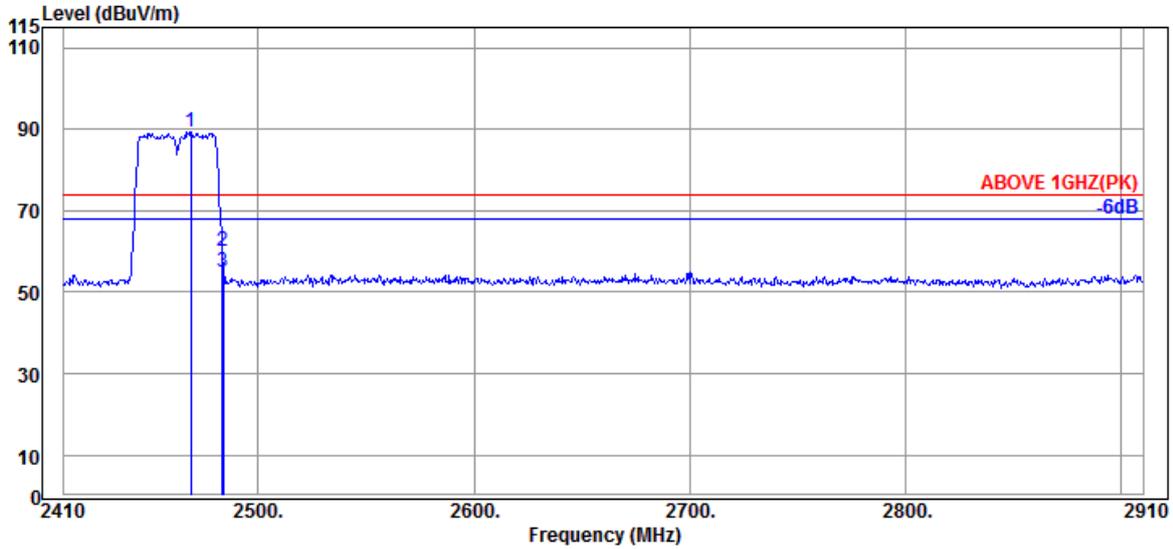

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	32.30	7.98	34.55	83.57	89.30	---	---	Peak
2483.500	32.30	7.99	34.55	54.14	59.88	74.00	14.12	Peak
2484.000	32.30	7.99	34.55	49.13	54.87	74.00	19.13	Peak

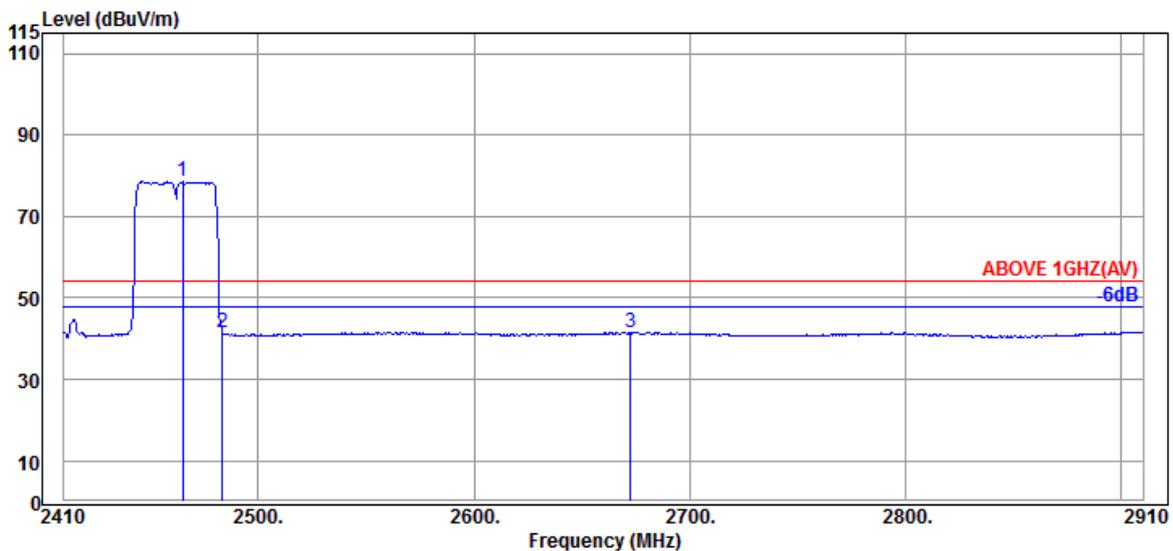


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	72.89	78.62	---	---	Average
2483.500	32.30	7.99	34.55	35.87	41.61	54.00	12.39	Average
2672.500	32.20	8.08	34.60	35.96	41.64	54.00	12.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

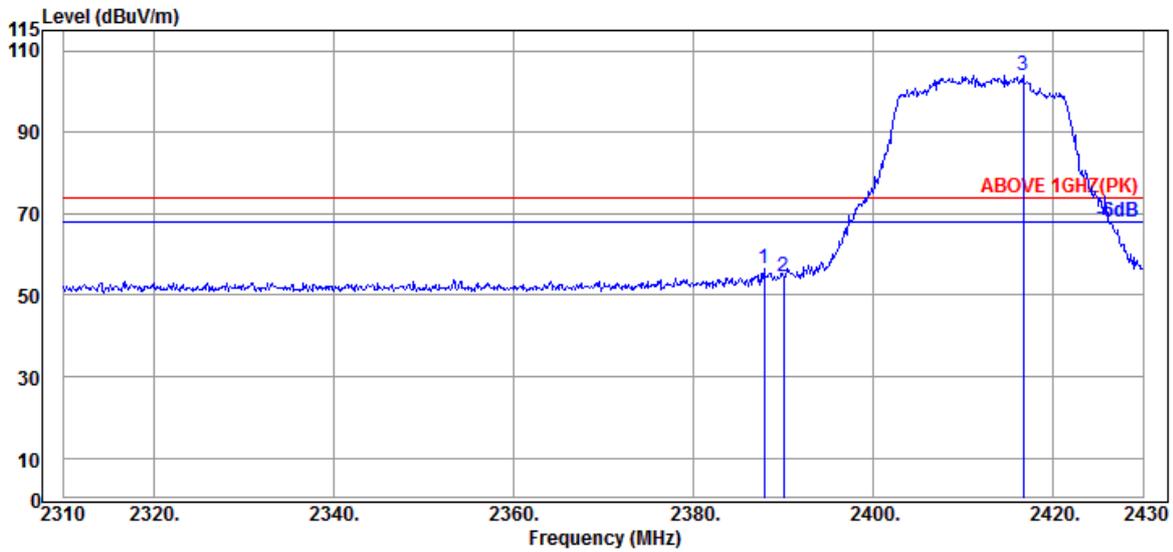

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	31.89	7.95	34.53	51.27	56.58	74.00	17.42	Peak
2390.040	31.89	7.95	34.54	49.11	54.41	74.00	19.59	Peak
@ 2416.680	31.94	7.96	34.54	98.76	104.12	---	---	Peak

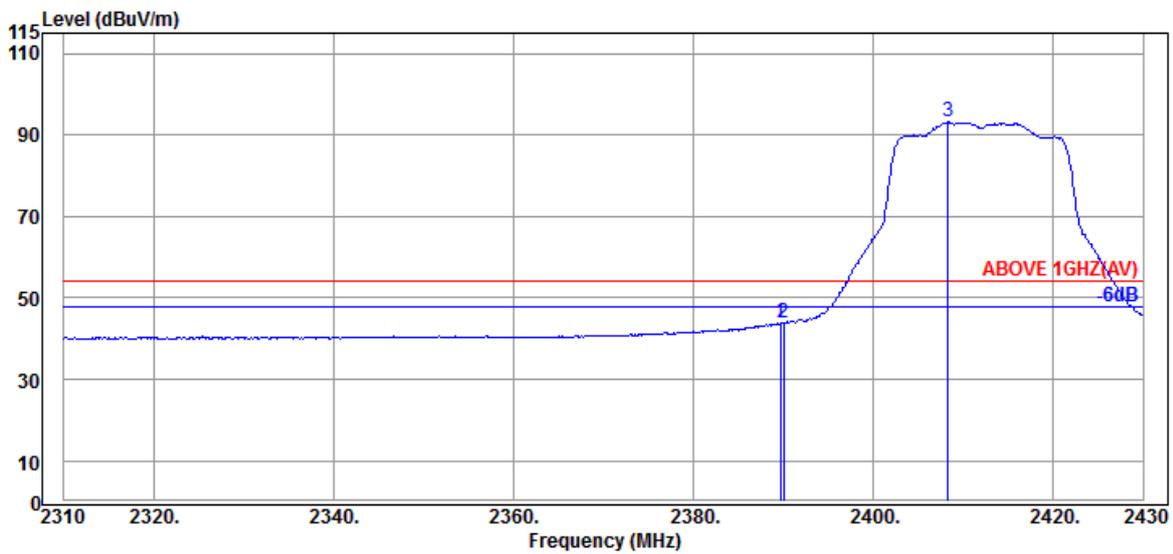


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	38.42	43.73	54.00	10.27	Average
2390.040	31.89	7.95	34.54	38.53	43.83	54.00	10.17	Average
@ 2408.280	31.87	7.96	34.54	87.94	93.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

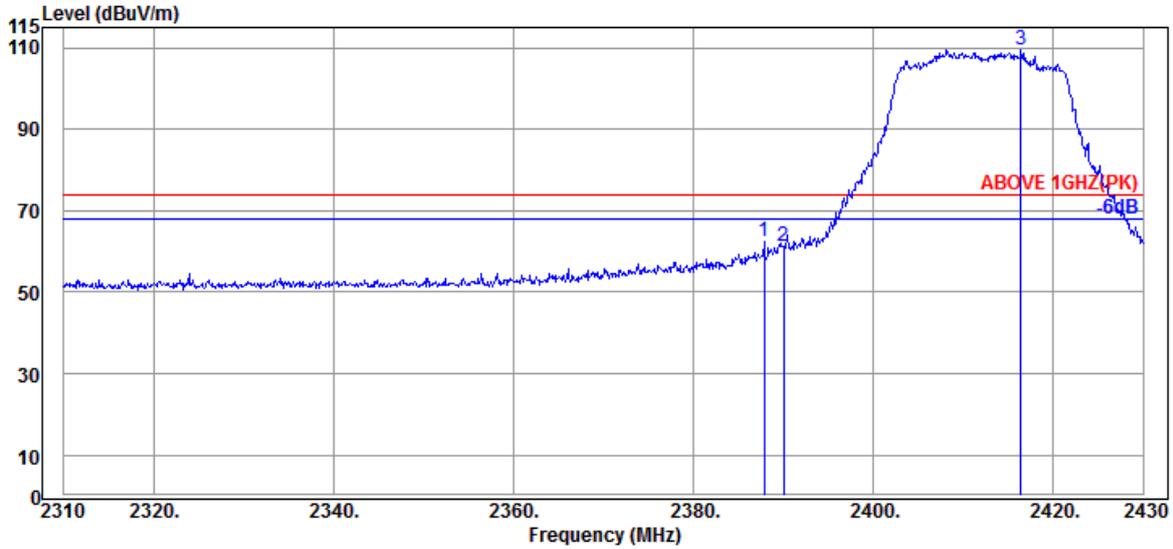

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	31.89	7.95	34.53	57.19	62.50	74.00	11.50	Peak
2390.040	31.89	7.95	34.54	56.12	61.42	74.00	12.58	Peak
@ 2416.440	31.94	7.96	34.54	104.09	109.45	---	---	Peak

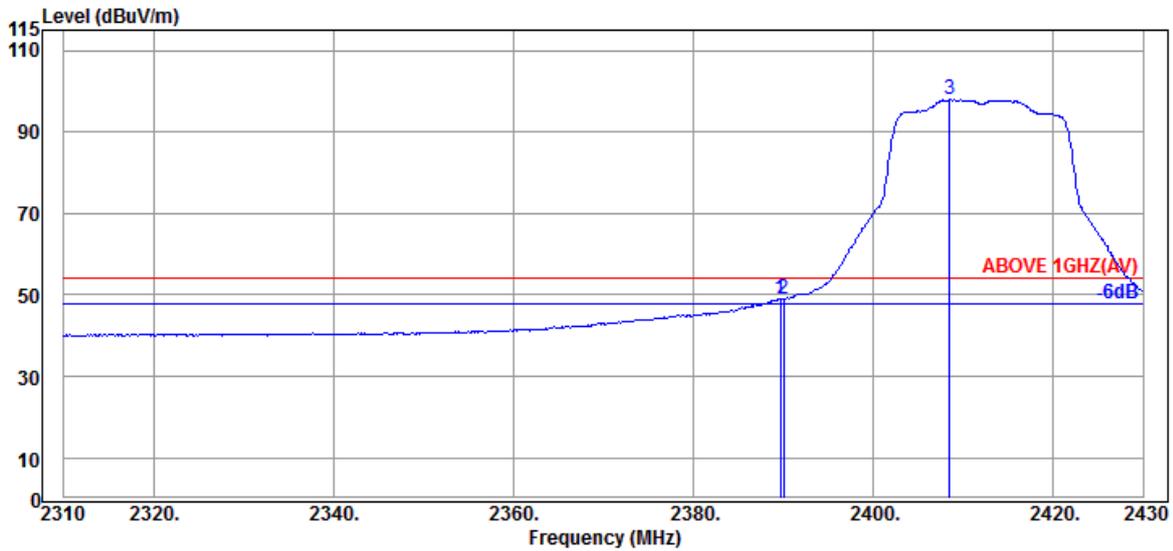


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	43.64	48.95	54.00	5.05	Average
2390.040	31.89	7.95	34.54	43.71	49.01	54.00	4.99	Average
@ 2408.520	31.87	7.96	34.54	92.87	98.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

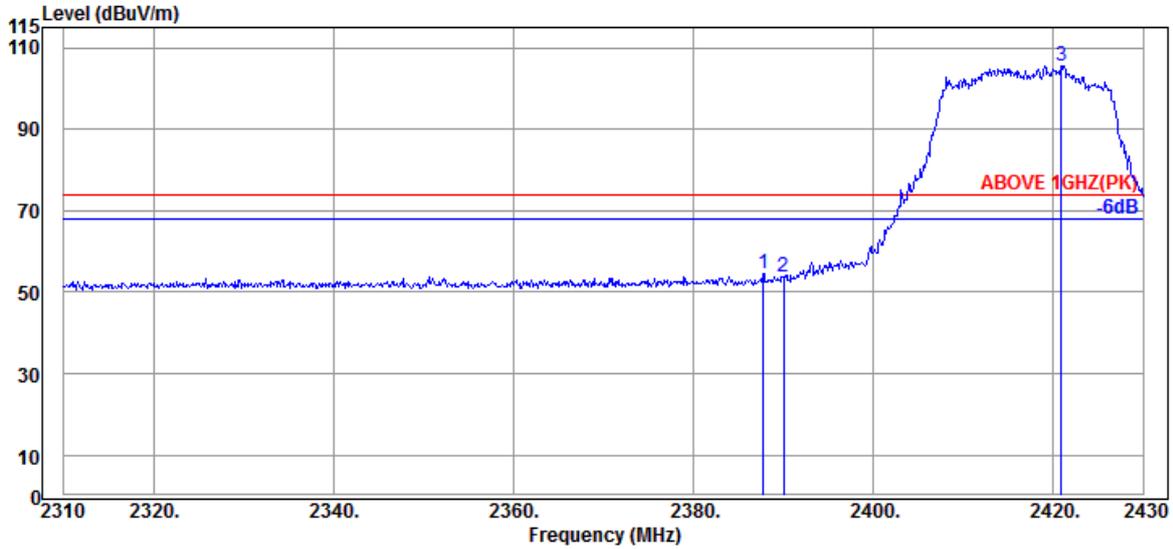

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.760	31.89	7.95	34.53	49.29	54.60	74.00	19.40	Peak
2390.040	31.89	7.95	34.54	48.58	53.88	74.00	20.12	Peak
@ 2420.880	32.01	7.96	34.54	100.07	105.50	---	---	Peak

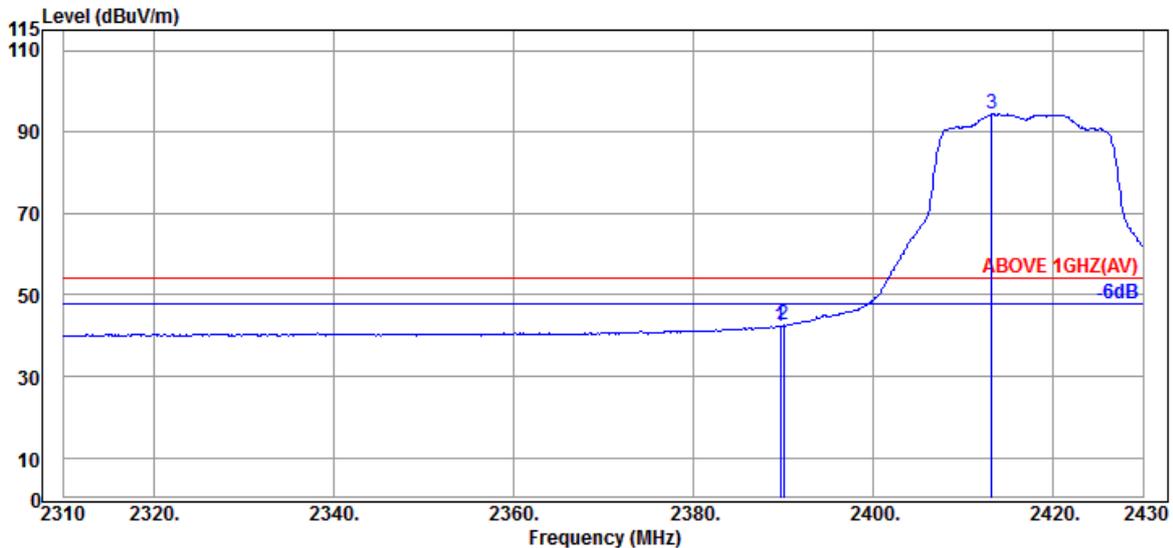


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.05	42.36	54.00	11.64	Average
2390.040	31.89	7.95	34.54	37.36	42.66	54.00	11.34	Average
@ 2413.200	31.94	7.96	34.54	89.23	94.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

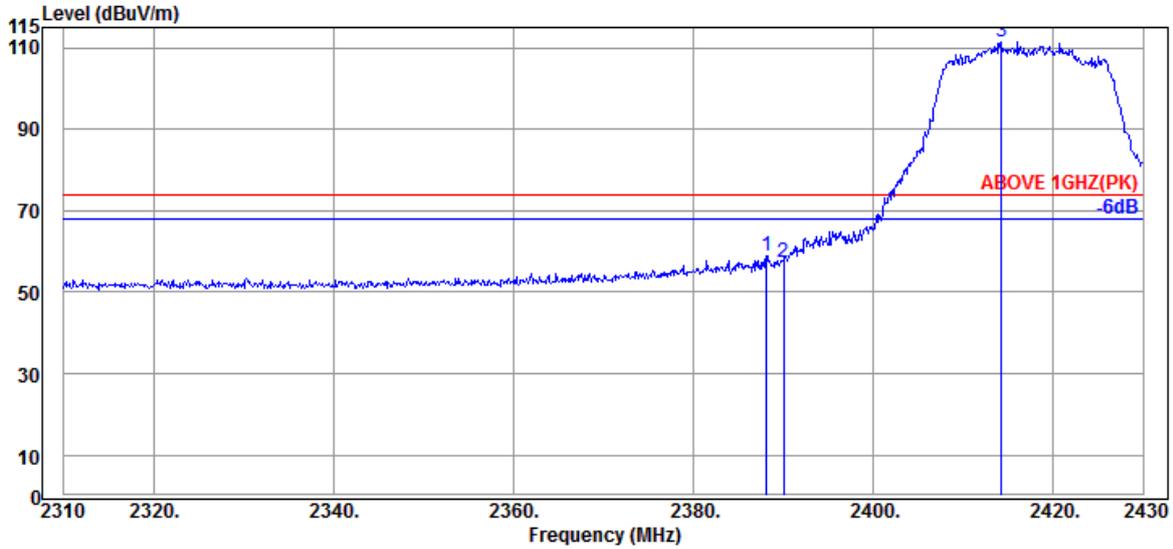

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	31.89	7.95	34.53	53.77	59.08	74.00	14.92	Peak
2390.040	31.89	7.95	34.54	52.11	57.41	74.00	16.59	Peak
@ 2414.280	31.94	7.96	34.54	106.18	111.54	---	---	Peak

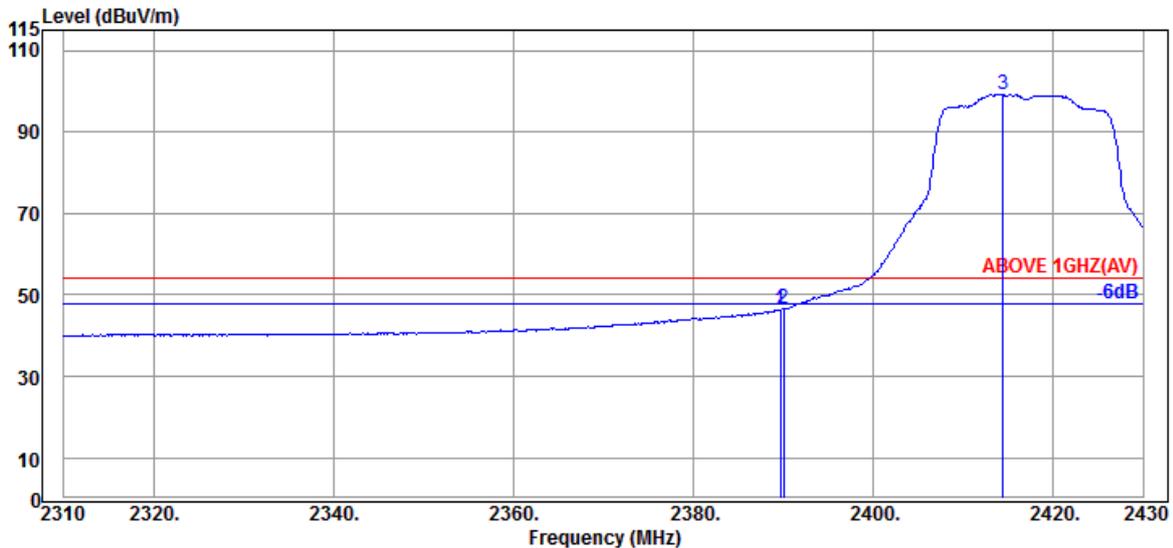


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	40.99	46.30	54.00	7.70	Average
2390.040	31.89	7.95	34.54	41.41	46.71	54.00	7.29	Average
@ 2414.400	31.94	7.96	34.54	93.78	99.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

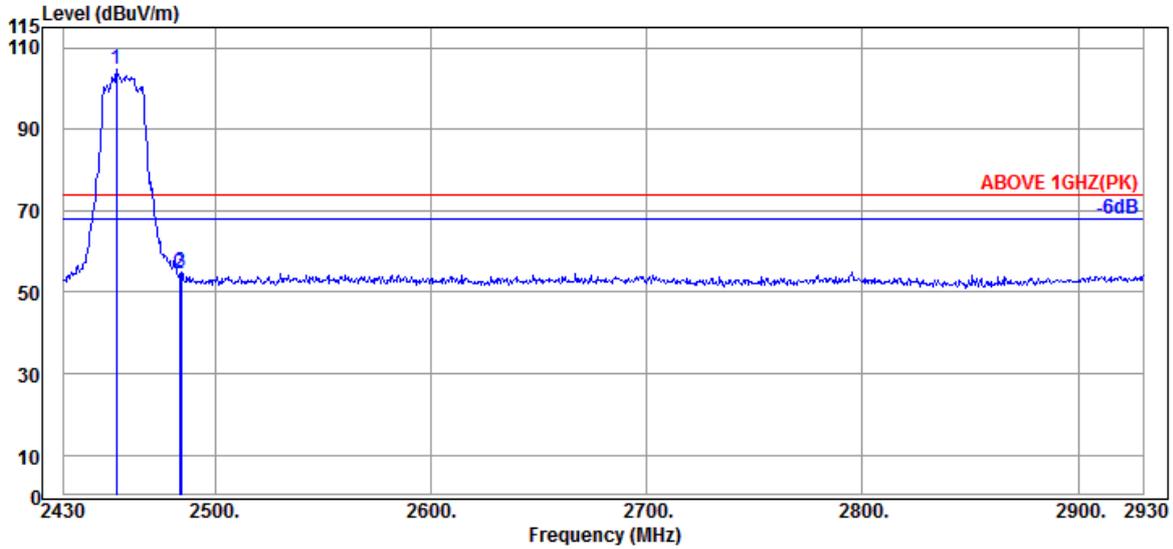

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	98.93	104.66	---	---	Peak
2483.500	32.30	7.99	34.55	48.74	54.48	74.00	19.52	Peak
2484.500	32.30	7.99	34.55	49.31	55.05	74.00	18.95	Peak

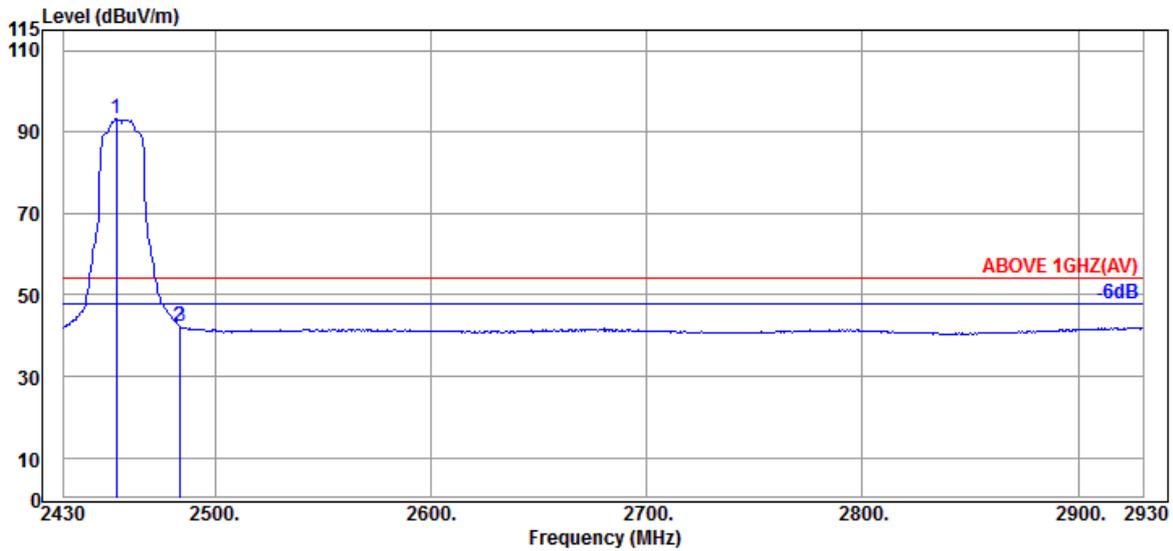


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	87.46	93.19	---	---	Average
2483.500	32.30	7.99	34.55	36.73	42.47	54.00	11.53	Average
2484.000	32.30	7.99	34.55	36.42	42.16	54.00	11.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

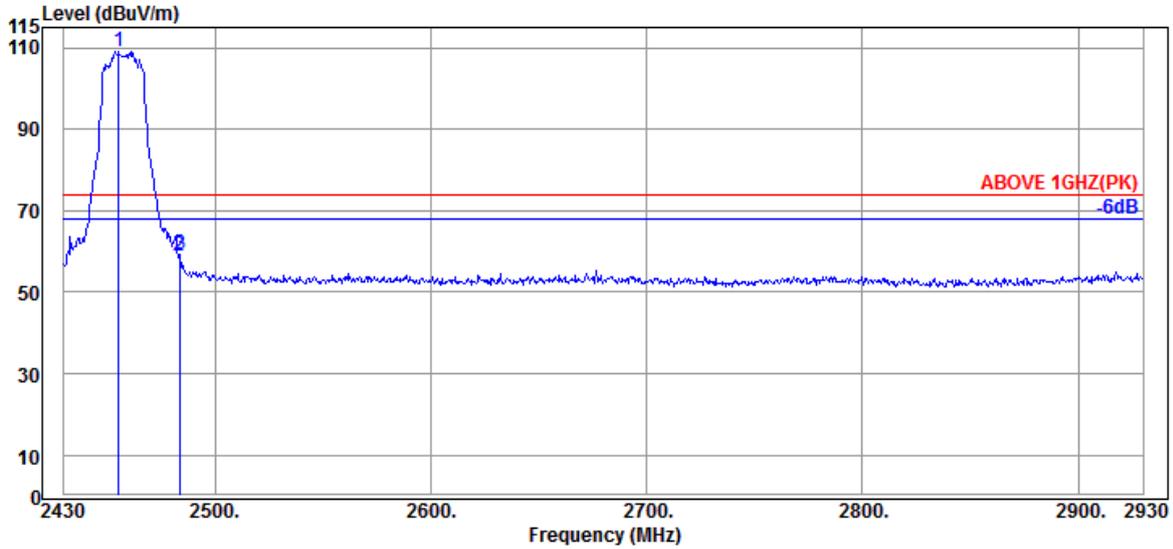

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	103.42	109.15	---	---	Peak
2483.500	32.30	7.99	34.55	53.21	58.95	74.00	15.05	Peak
2484.000	32.30	7.99	34.55	53.55	59.29	74.00	14.71	Peak

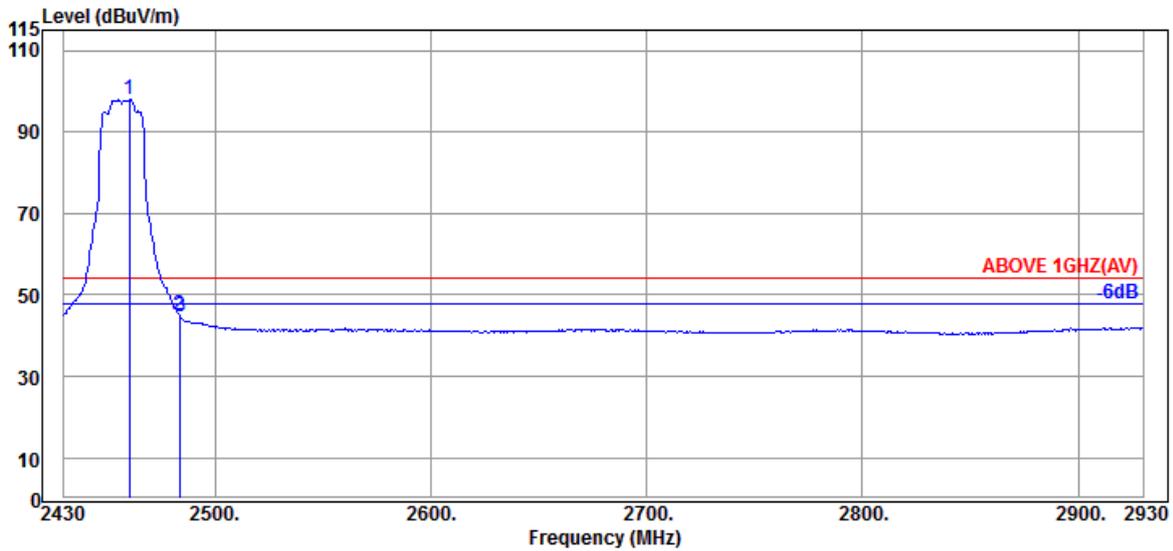


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	7.98	34.55	92.19	97.92	---	---	Average
2483.500	32.30	7.99	34.55	39.18	44.92	54.00	9.08	Average
2484.000	32.30	7.99	34.55	39.07	44.81	54.00	9.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

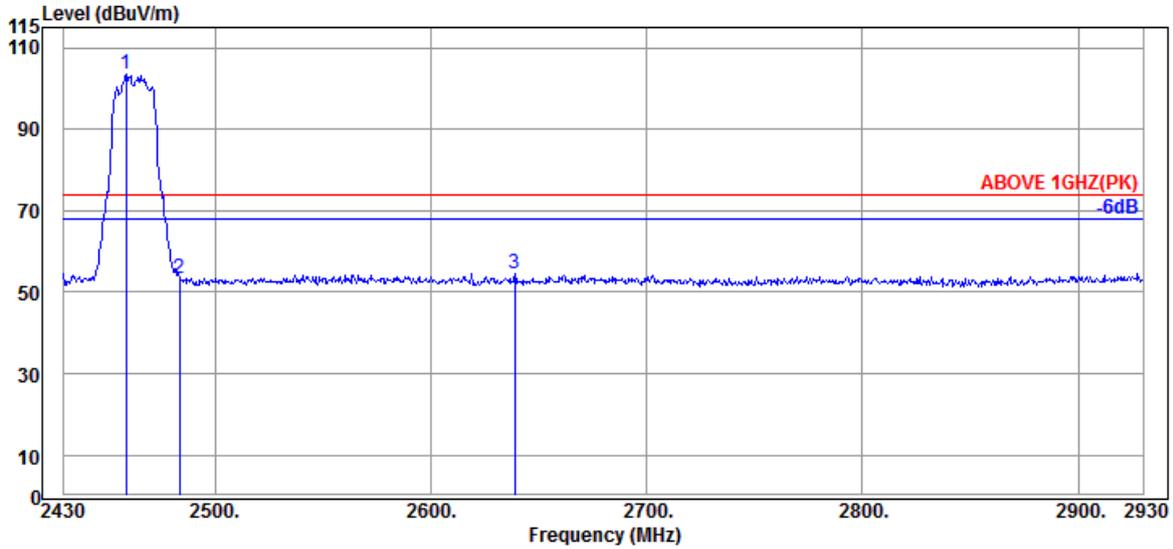

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	97.92	103.65	---	---	Peak
2483.500	32.30	7.99	34.55	47.59	53.33	74.00	20.67	Peak
2639.000	32.25	8.07	34.59	48.92	54.65	74.00	19.35	Peak

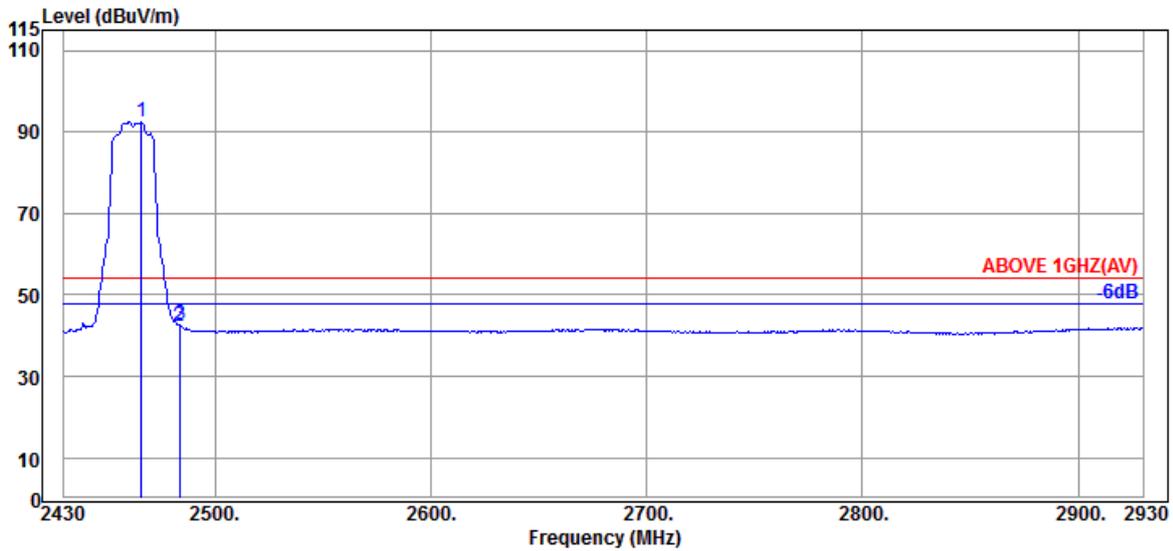


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	86.72	92.45	---	---	Average
2483.500	32.30	7.99	34.55	36.50	42.24	54.00	11.76	Average
2484.000	32.30	7.99	34.55	36.80	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

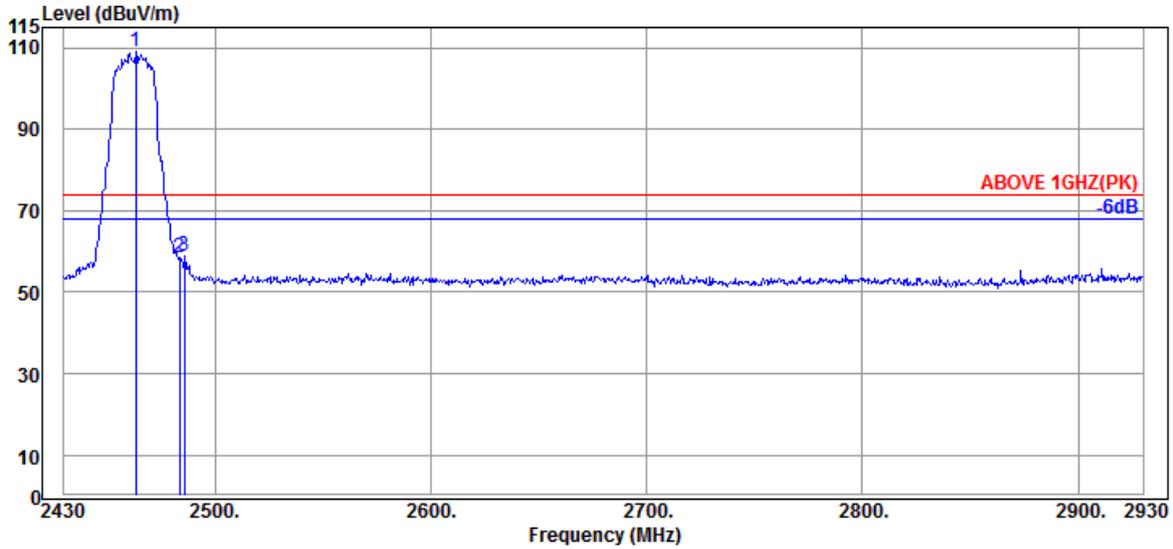

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	103.38	109.11	---	---	Peak
2483.500	32.30	7.99	34.55	52.63	58.37	74.00	15.63	Peak
2486.000	32.30	8.00	34.55	52.94	58.69	74.00	15.31	Peak

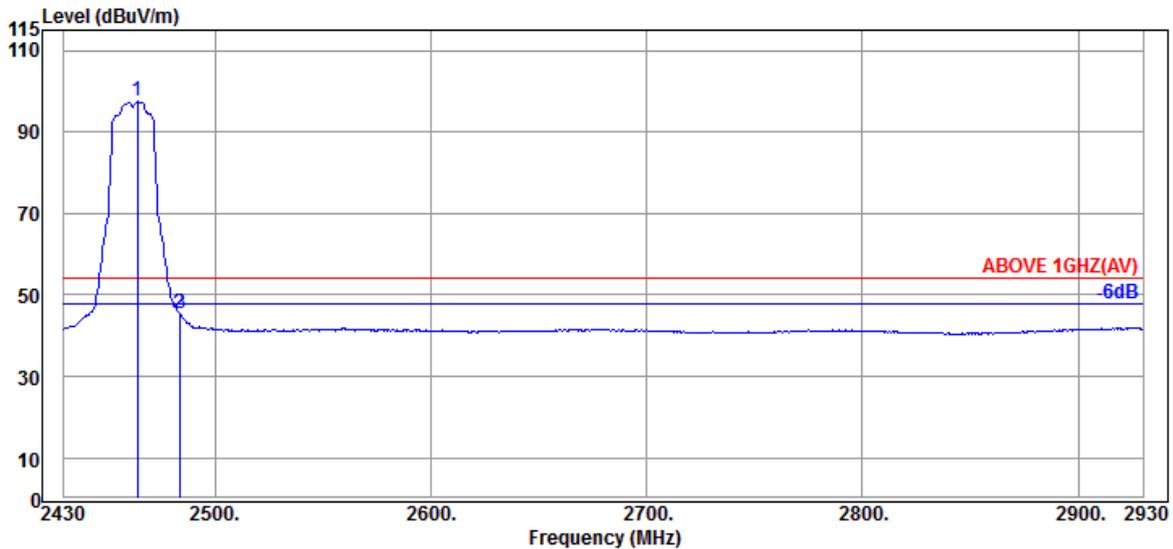


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	91.71	97.44	---	---	Average
2483.500	32.30	7.99	34.55	39.81	45.55	54.00	8.45	Average
2484.000	32.30	7.99	34.55	39.61	45.35	54.00	8.65	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

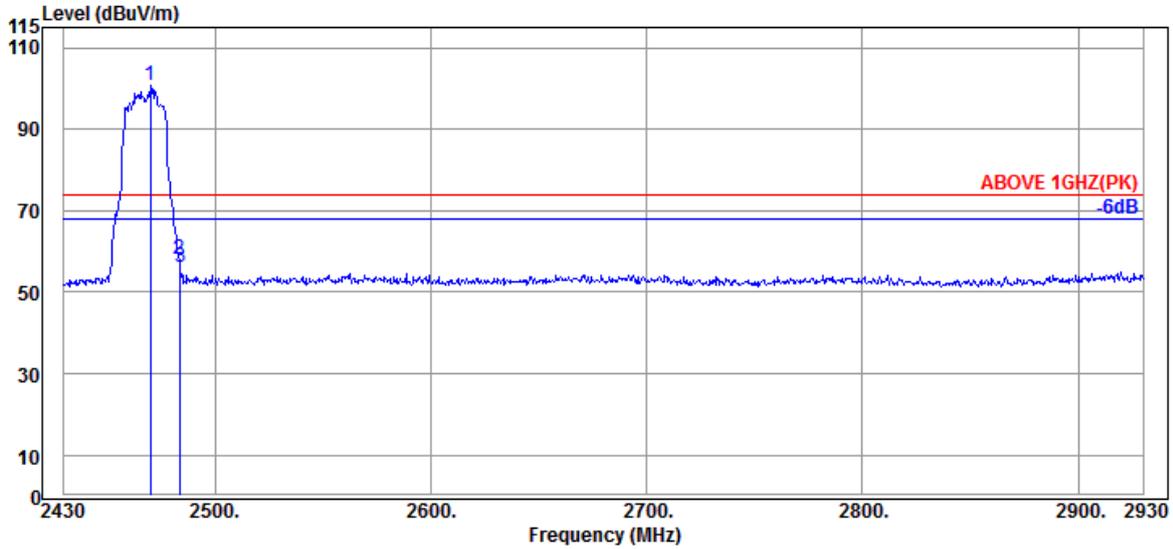

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	32.30	7.99	34.55	94.95	100.69	---	---	Peak
2483.500	32.30	7.99	34.55	52.23	57.97	74.00	16.03	Peak
2484.000	32.30	7.99	34.55	50.34	56.08	74.00	17.92	Peak

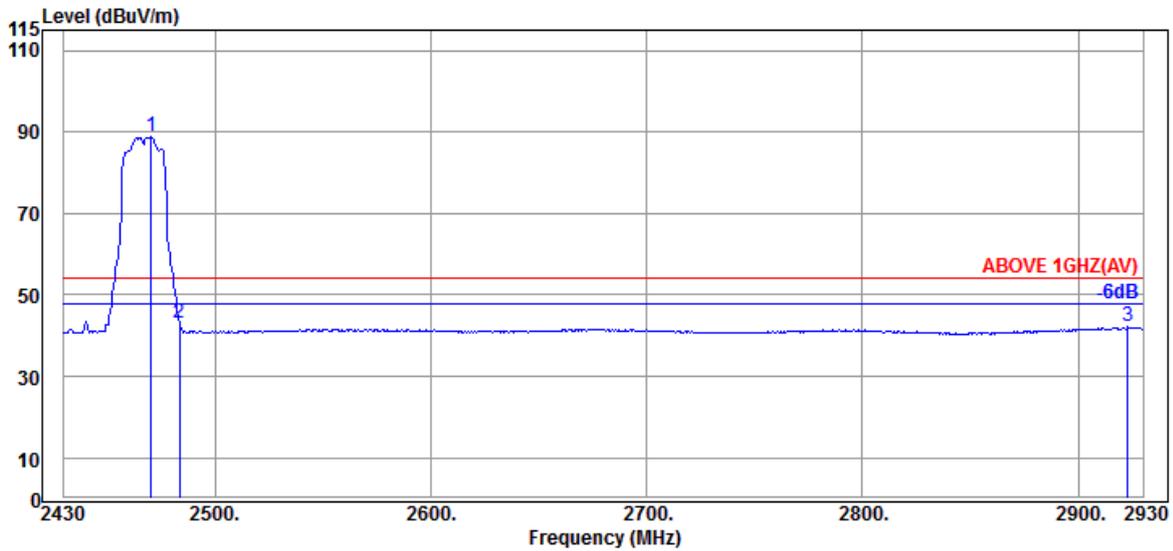


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	83.06	88.80	---	---	Average
2483.500	32.30	7.99	34.55	37.40	43.14	54.00	10.86	Average
2923.000	32.90	8.19	34.64	35.64	42.09	54.00	11.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

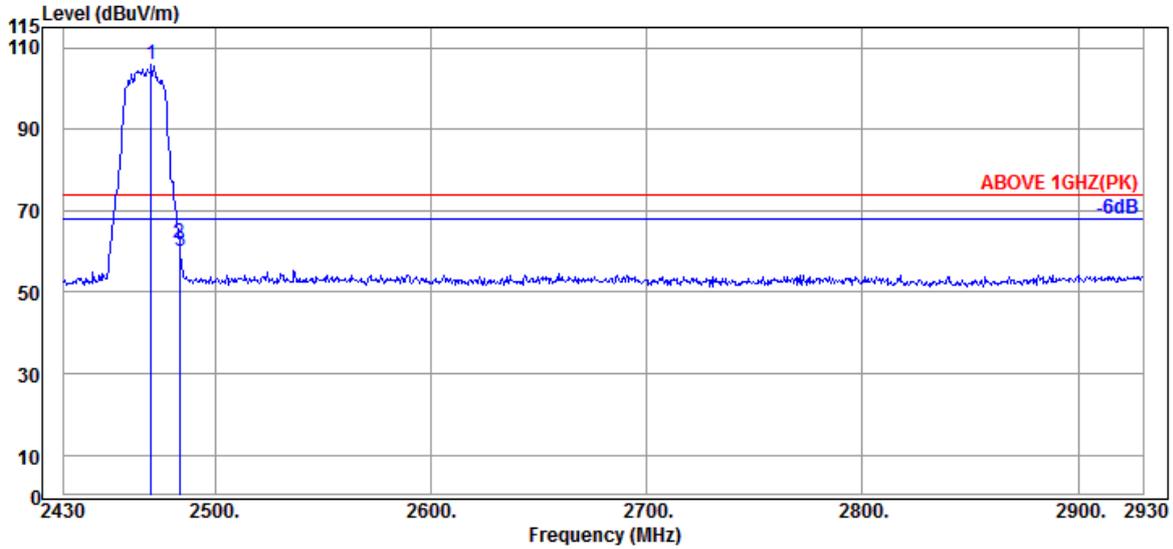

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	100.03	105.77	---	---	Peak
2483.500	32.30	7.99	34.55	56.50	62.24	74.00	11.76	Peak
2484.000	32.30	7.99	34.55	54.16	59.90	74.00	14.10	Peak

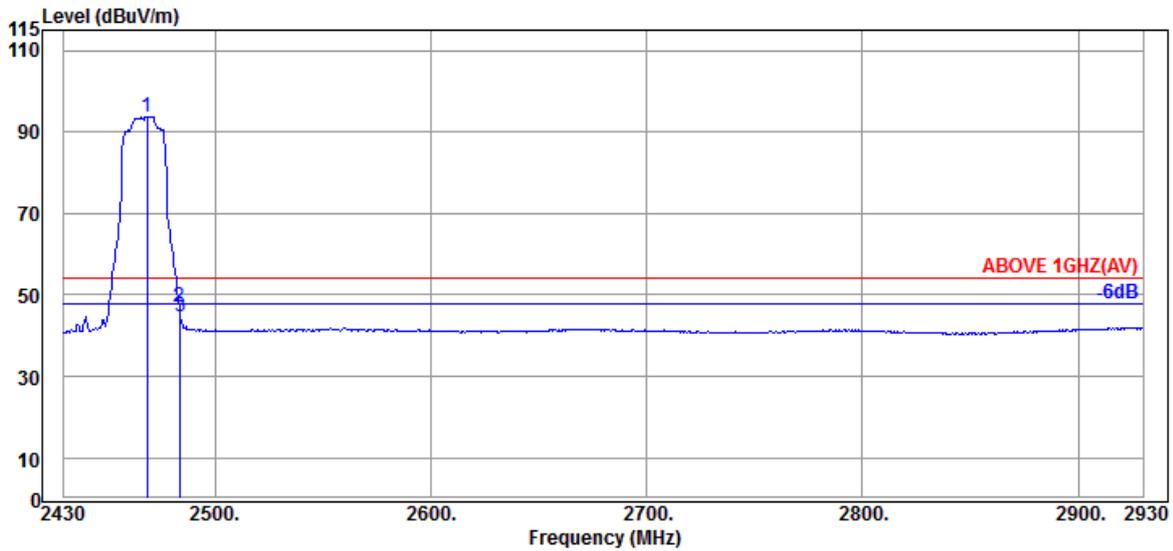


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	88.09	93.82	---	---	Average
2483.500	32.30	7.99	34.55	41.30	47.04	54.00	6.96	Average
2484.000	32.30	7.99	34.55	39.05	44.79	54.00	9.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

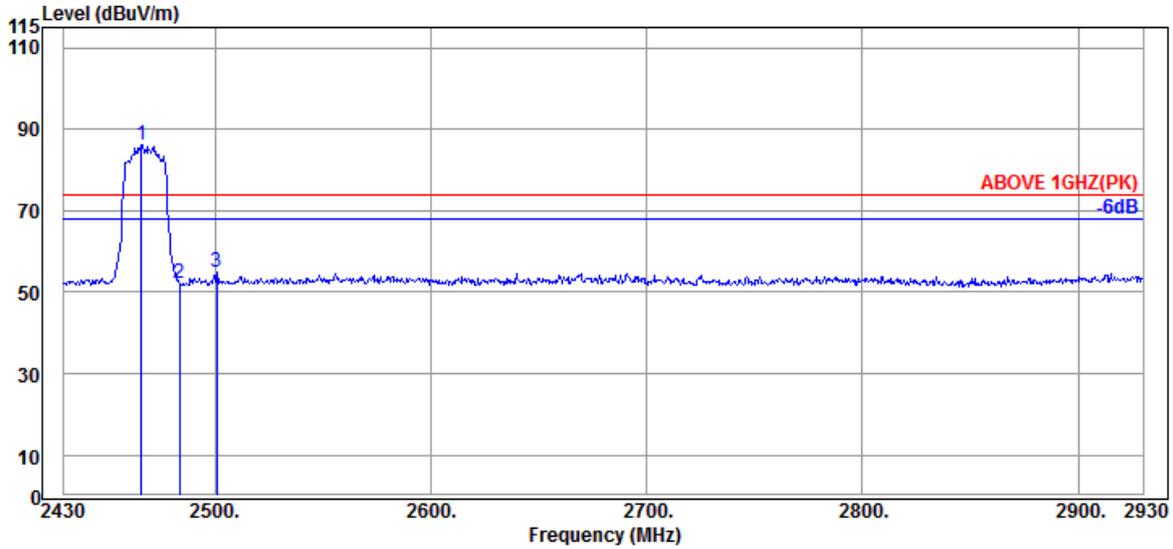

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	80.33	86.06	---	---	Peak
2483.500	32.30	7.99	34.55	46.54	52.28	74.00	21.72	Peak
2501.000	32.30	8.00	34.56	49.07	54.81	74.00	19.19	Peak

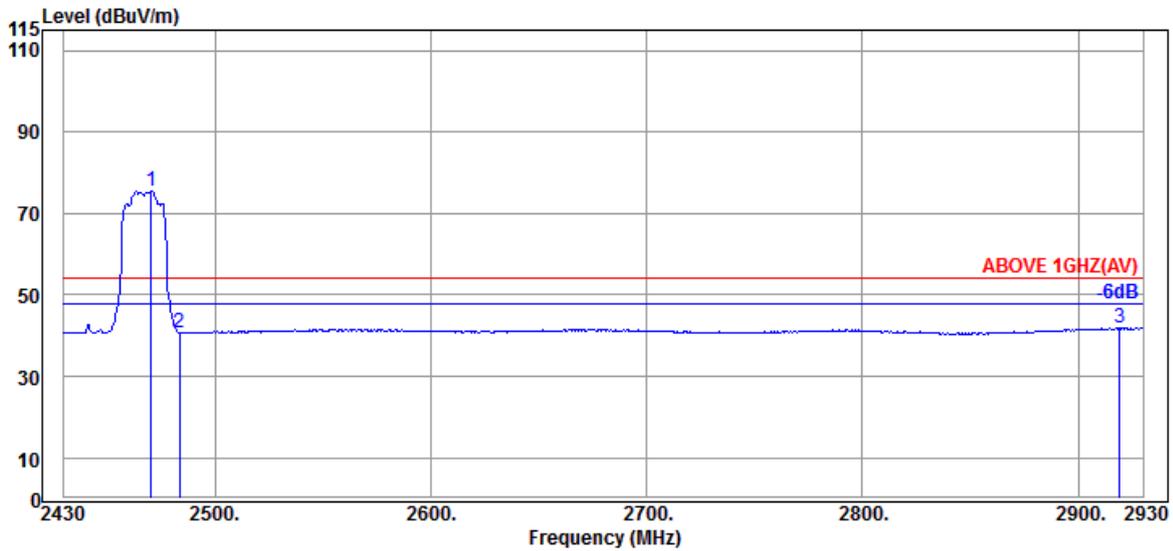


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	32.30	7.99	34.55	69.85	75.59	---	---	Average
2483.500	32.30	7.99	34.55	35.02	40.76	54.00	13.24	Average
2919.000	32.90	8.19	34.64	35.38	41.83	54.00	12.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

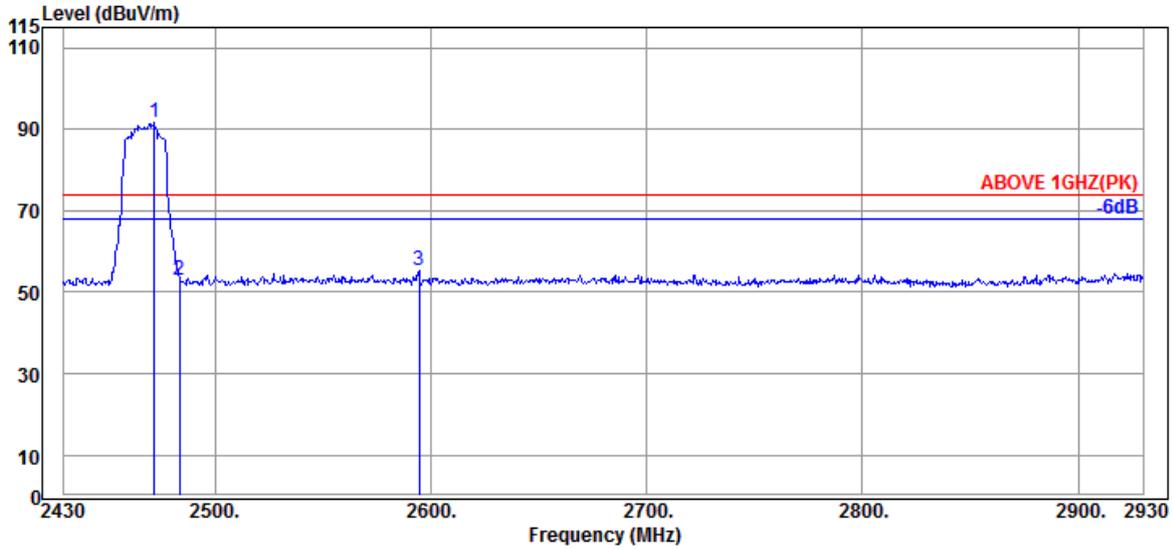

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	32.30	7.99	34.55	85.99	91.73	---	---	Peak
2483.500	32.30	7.99	34.55	47.25	52.99	74.00	21.01	Peak
2594.500	32.50	8.05	34.58	49.54	55.51	74.00	18.49	Peak

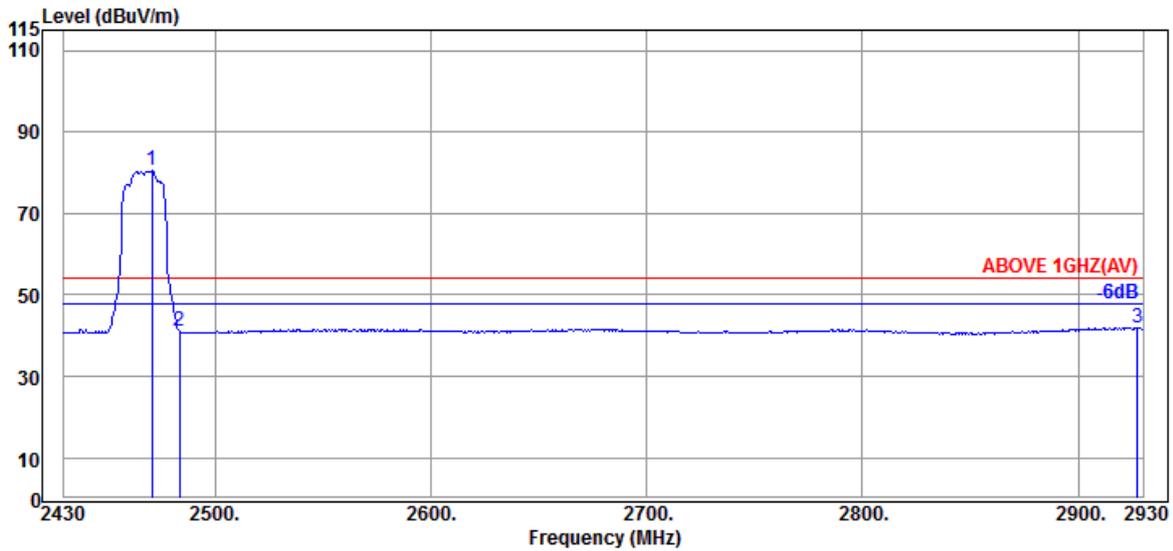


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	74.69	80.43	---	---	Average
2483.500	32.30	7.99	34.55	35.31	41.05	54.00	12.95	Average
2927.500	32.97	8.19	34.65	35.37	41.88	54.00	12.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

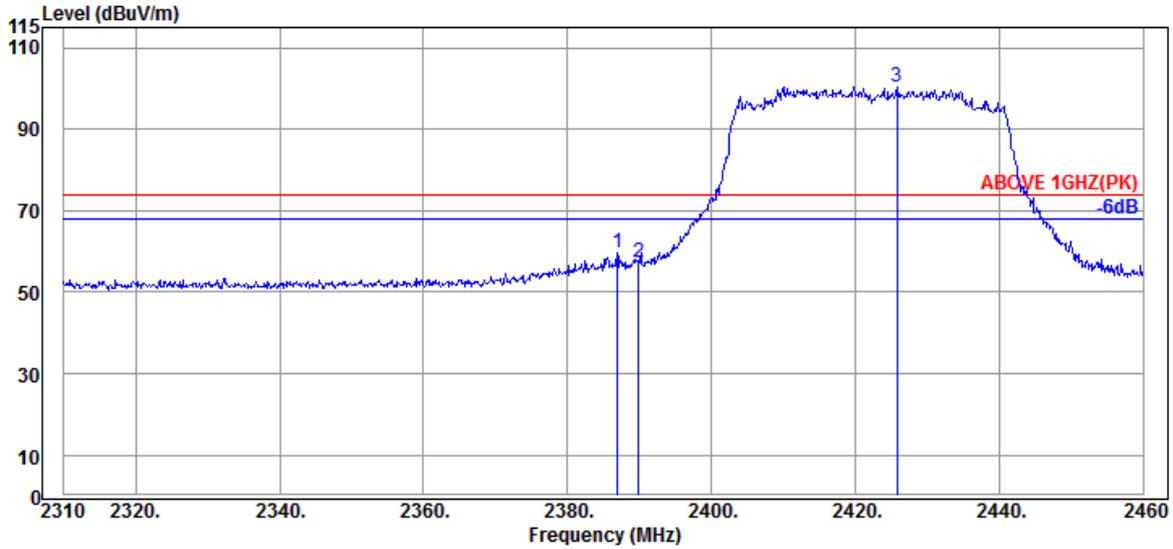

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.950	31.89	7.95	34.53	54.24	59.55	74.00	14.45	Peak
2389.950	31.89	7.95	34.54	52.06	57.36	74.00	16.64	Peak
@ 2425.800	32.09	7.97	34.54	94.93	100.45	---	---	Peak

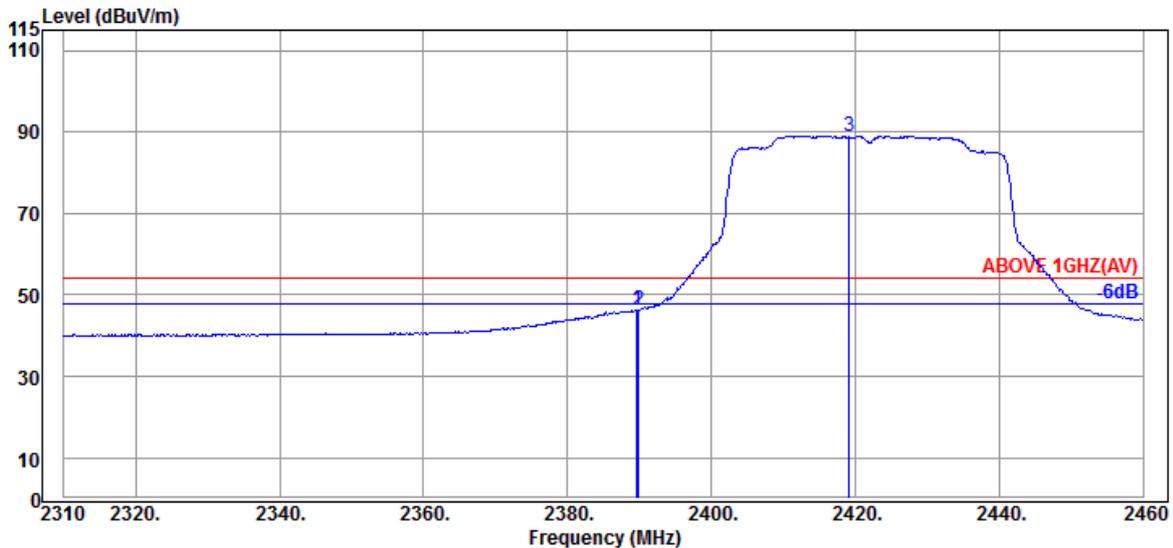


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	40.96	46.27	54.00	7.73	Average
2389.950	31.89	7.95	34.54	40.87	46.17	54.00	7.83	Average
@ 2419.200	32.01	7.96	34.54	83.64	89.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

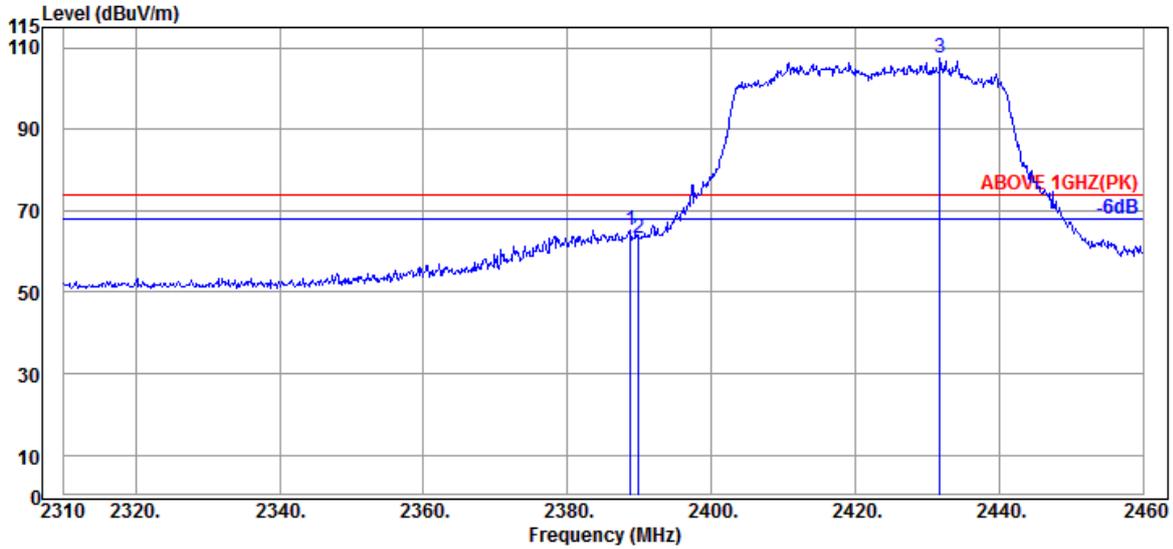

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	7.95	34.53	59.83	65.14	74.00	8.86	Peak
2389.950	31.89	7.95	34.54	58.02	63.32	74.00	10.68	Peak
@ 2431.800	32.09	7.97	34.54	101.85	107.37	---	---	Peak

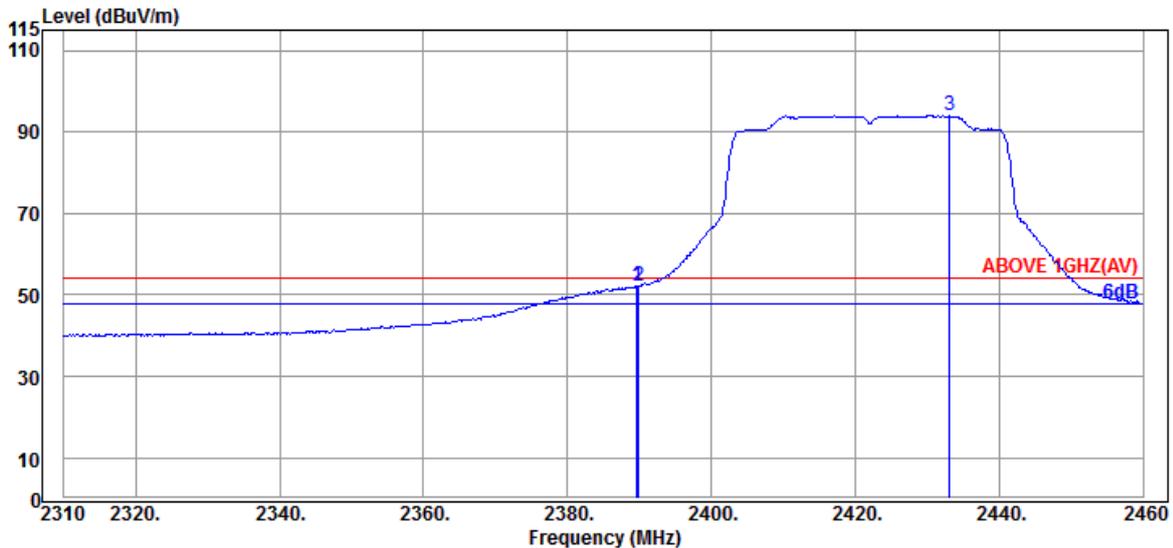


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	46.72	52.03	54.00	1.97	Average
2389.950	31.89	7.95	34.54	46.90	52.20	54.00	1.80	Average
@ 2433.150	32.16	7.97	34.54	88.45	94.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

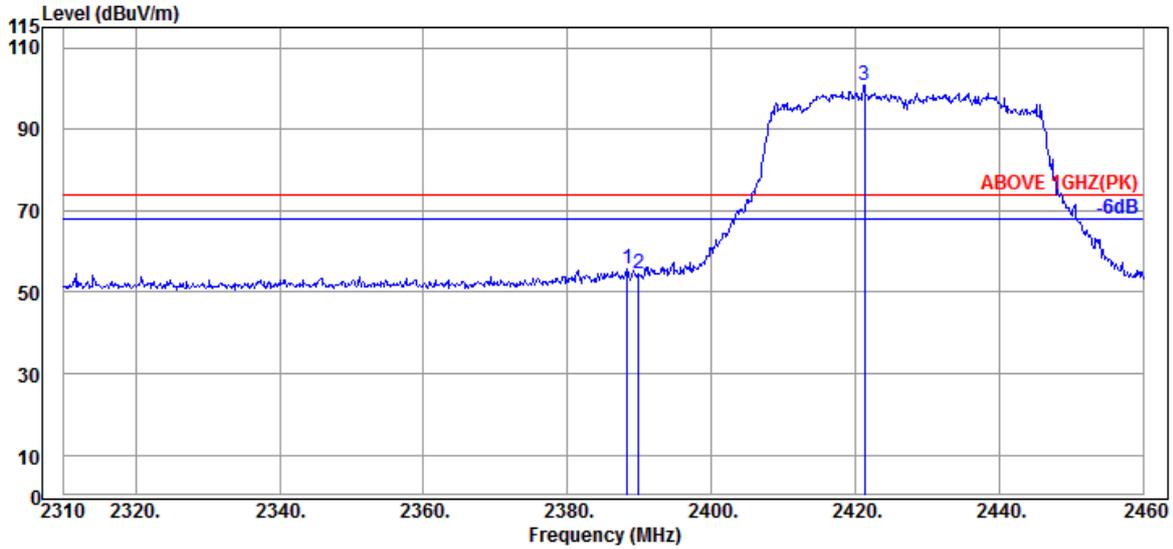

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	31.89	7.95	34.53	50.51	55.82	74.00	18.18	Peak
2389.950	31.89	7.95	34.54	49.33	54.63	74.00	19.37	Peak
@ 2421.300	32.01	7.96	34.54	95.33	100.76	---	---	Peak

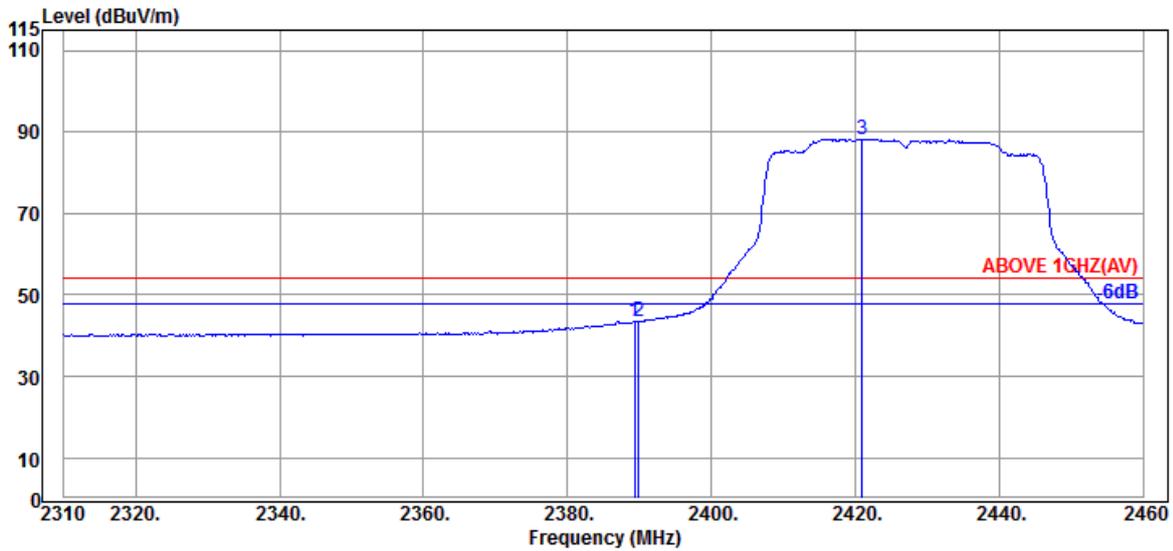


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	31.89	7.95	34.53	38.11	43.42	54.00	10.58	Average
2389.950	31.89	7.95	34.54	38.16	43.46	54.00	10.54	Average
@ 2421.000	32.01	7.96	34.54	82.88	88.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

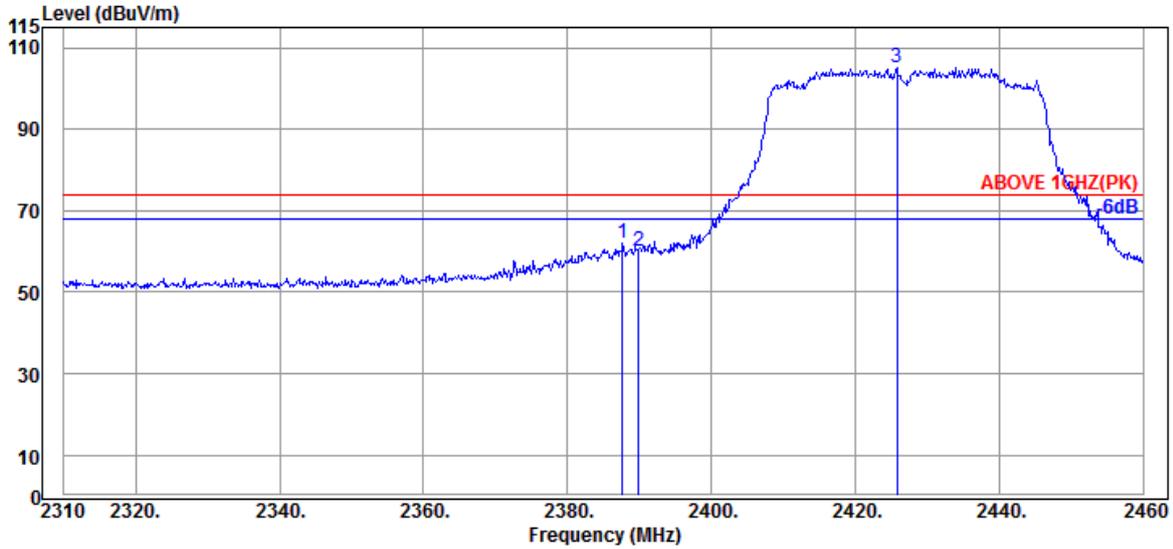

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	31.89	7.95	34.53	56.60	61.91	74.00	12.09	Peak
2389.950	31.89	7.95	34.54	54.59	59.89	74.00	14.11	Peak
@ 2425.800	32.09	7.97	34.54	99.45	104.97	---	---	Peak

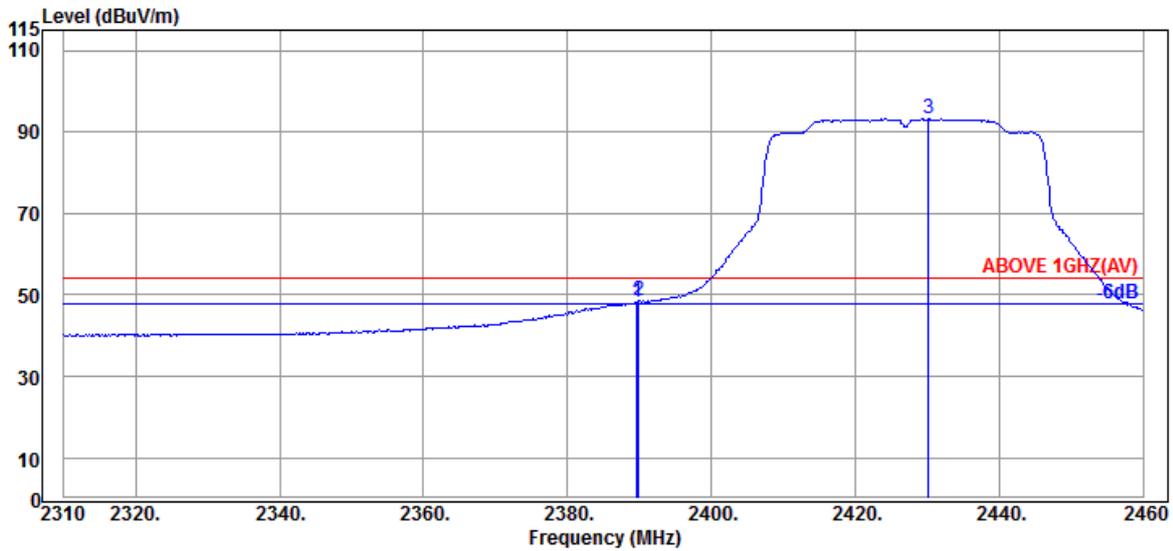


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	42.84	48.15	54.00	5.85	Average
2389.950	31.89	7.95	34.54	43.12	48.42	54.00	5.58	Average
@ 2430.150	32.09	7.97	34.54	87.66	93.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

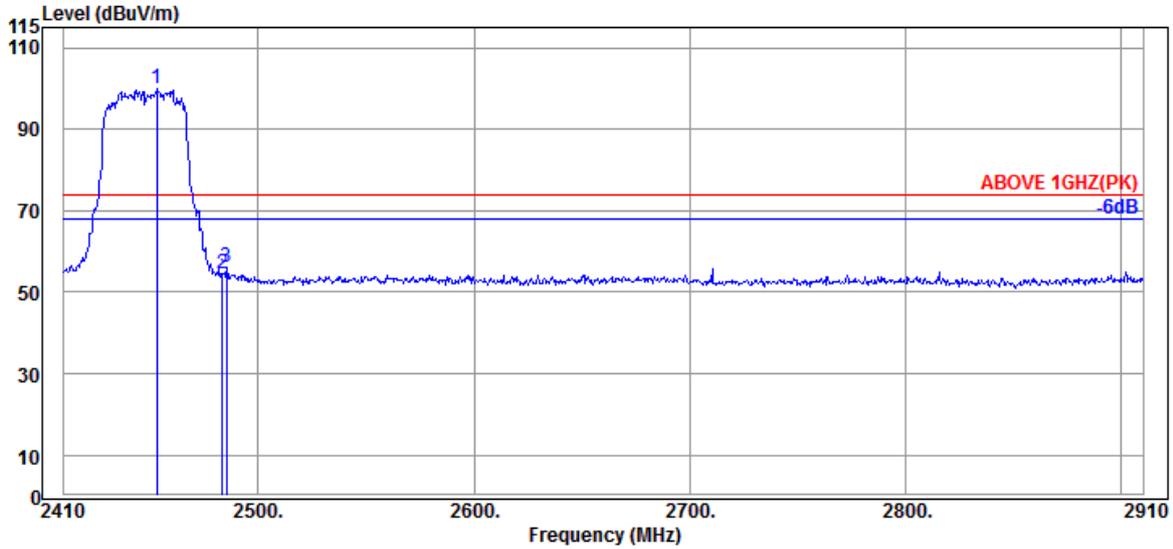

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	94.32	100.05	---	---	Peak
2483.500	32.30	7.99	34.55	48.67	54.41	74.00	19.59	Peak
2485.500	32.30	7.99	34.55	50.44	56.18	74.00	17.82	Peak

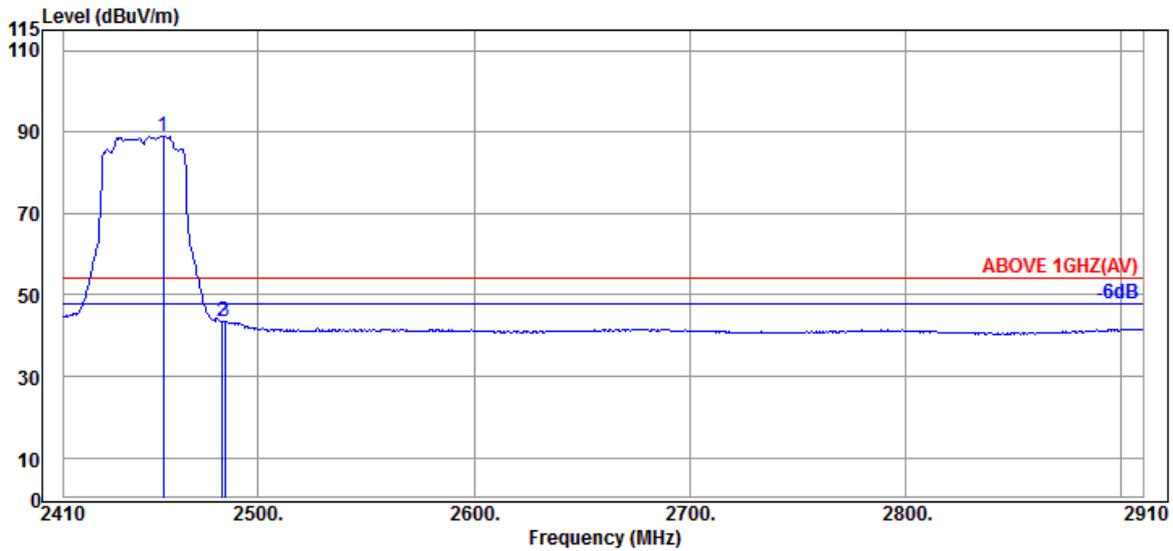


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	83.26	88.99	---	---	Average
2483.500	32.30	7.99	34.55	37.66	43.40	54.00	10.60	Average
2484.500	32.30	7.99	34.55	37.74	43.48	54.00	10.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

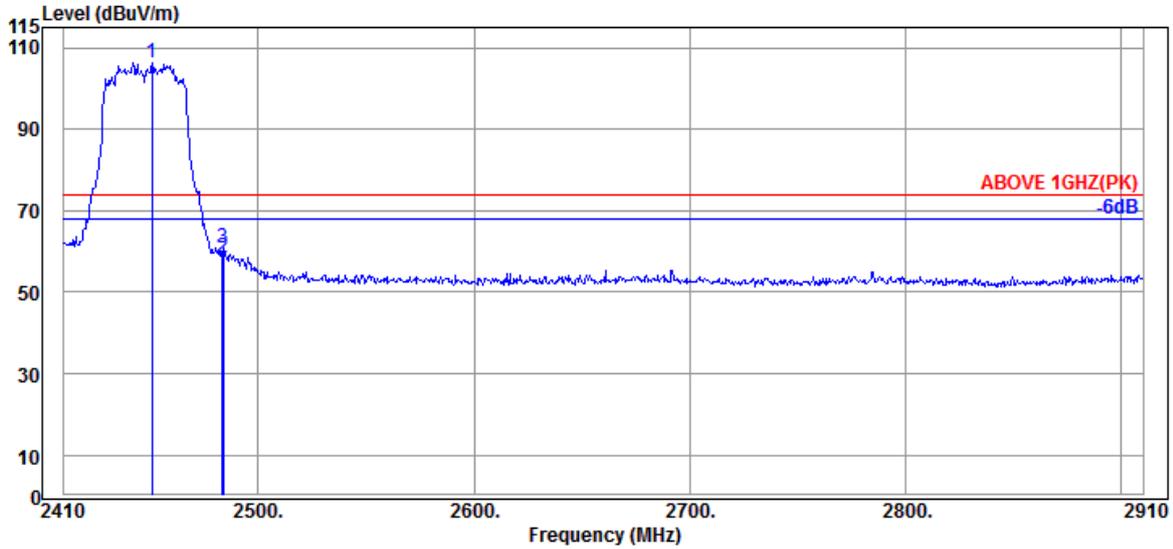

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.000	32.30	7.98	34.55	100.61	106.34	---	---	Peak
	2483.500	32.30	7.99	34.55	52.69	58.43	74.00	15.57	Peak
	2484.000	32.30	7.99	34.55	55.10	60.84	74.00	13.16	Peak

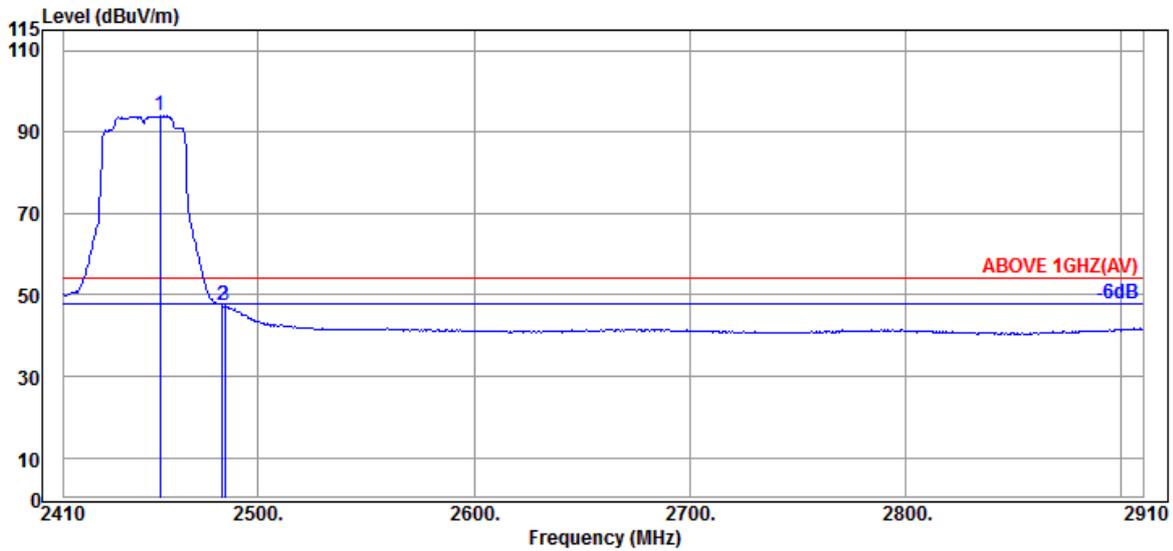


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.500	32.30	7.98	34.55	88.18	93.91	---	---	Average
	2483.500	32.30	7.99	34.55	41.79	47.53	54.00	6.47	Average
	2484.500	32.30	7.99	34.55	41.59	47.33	54.00	6.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

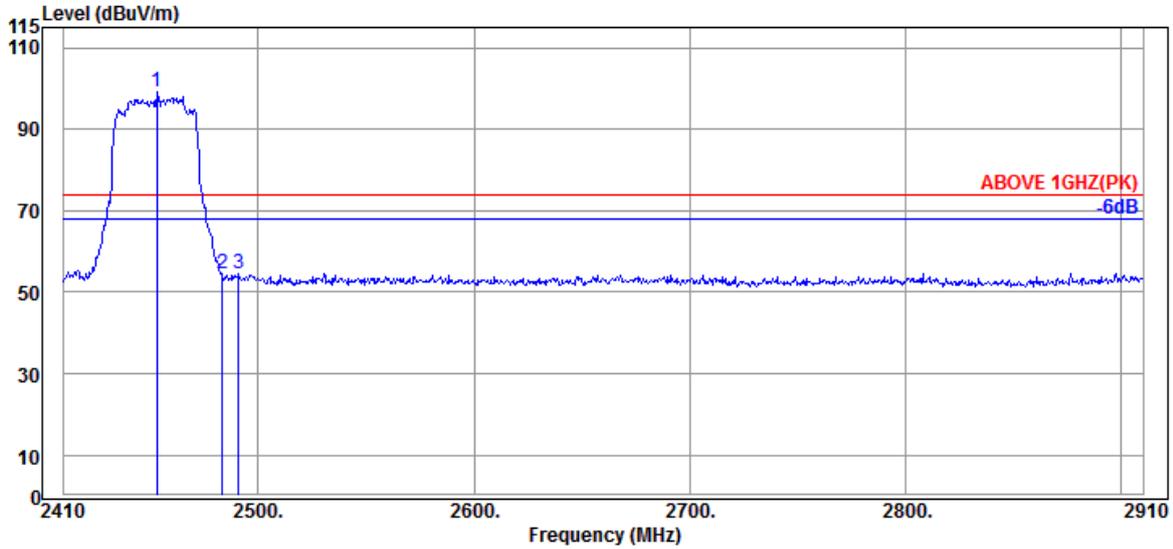

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	93.38	99.11	---	---	Peak
2483.500	32.30	7.99	34.55	48.66	54.40	74.00	19.60	Peak
2491.000	32.30	8.00	34.55	48.98	54.73	74.00	19.27	Peak

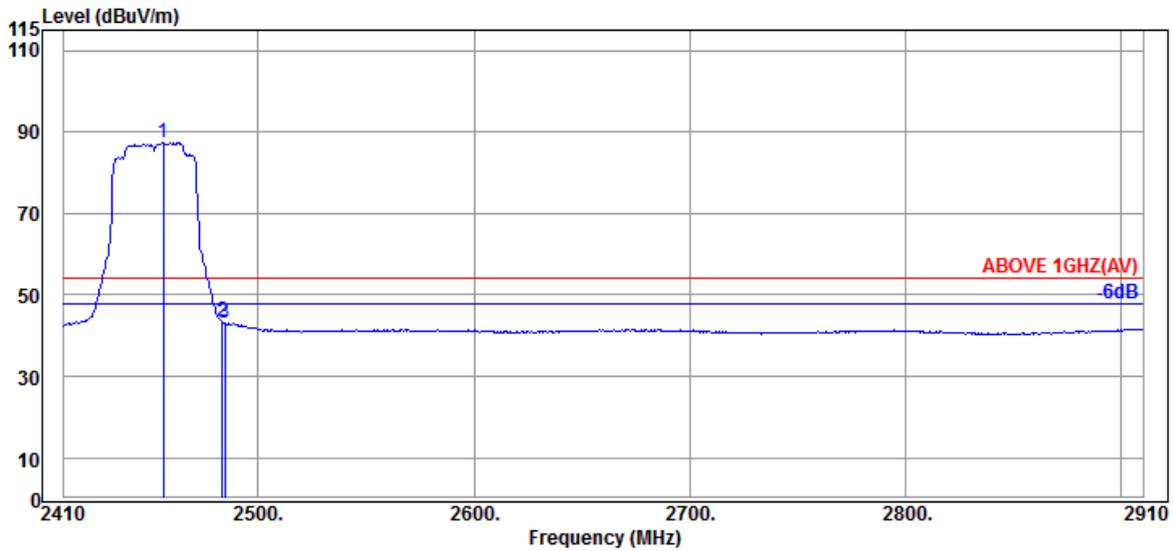


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	81.56	87.29	---	---	Average
2483.500	32.30	7.99	34.55	37.58	43.32	54.00	10.68	Average
2484.500	32.30	7.99	34.55	37.41	43.15	54.00	10.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

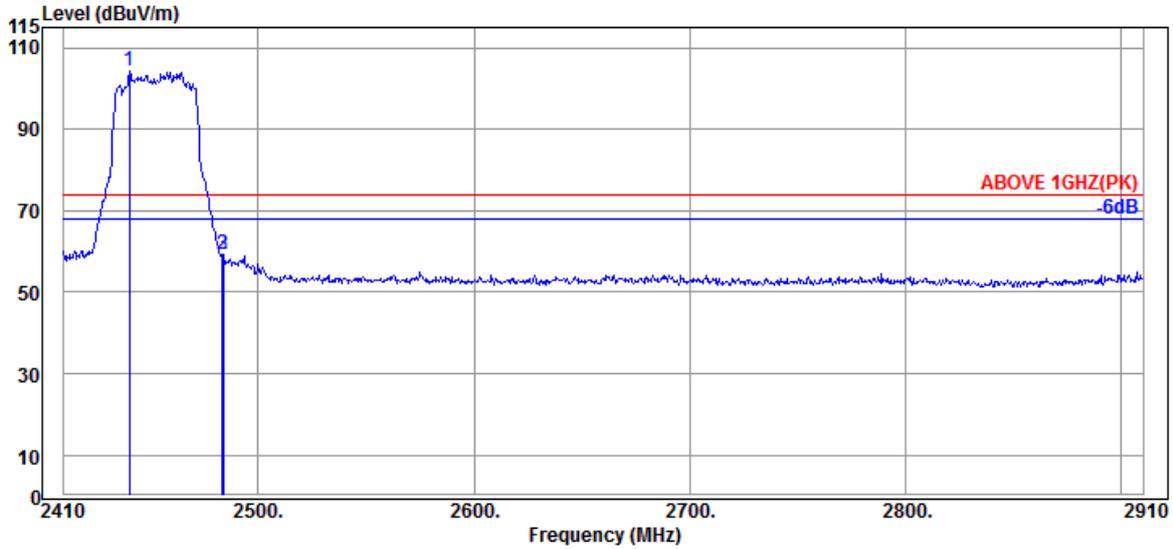

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.500	32.23	7.98	34.54	98.60	104.27	---	---	Peak
	2483.500	32.30	7.99	34.55	53.55	59.29	74.00	14.71	Peak
	2484.000	32.30	7.99	34.55	53.49	59.23	74.00	14.77	Peak

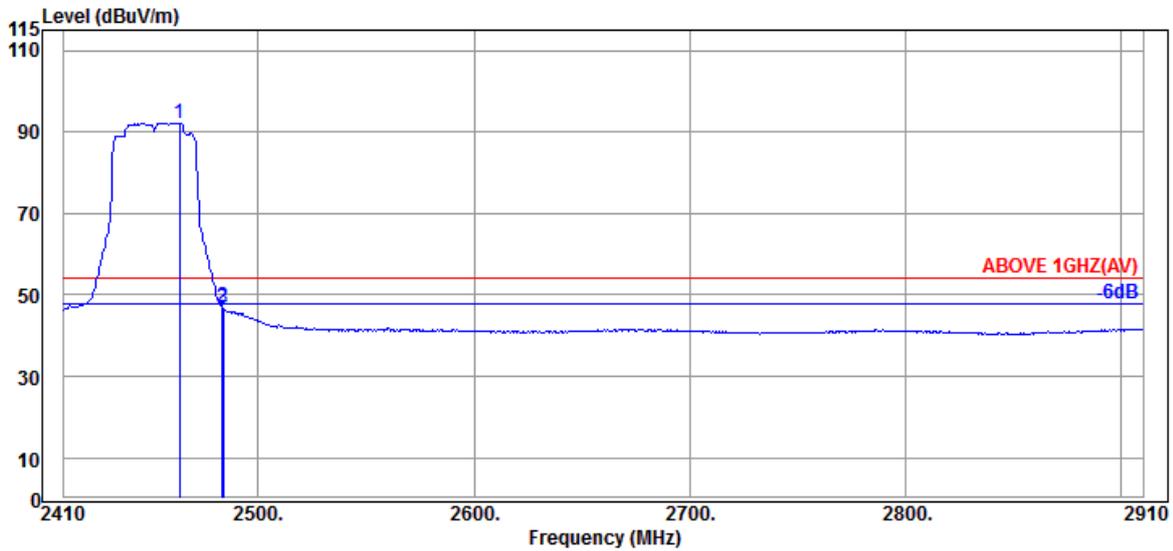


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.500	32.30	7.98	34.55	86.48	92.21	---	---	Average
	2483.500	32.30	7.99	34.55	41.15	46.89	54.00	7.11	Average
	2484.000	32.30	7.99	34.55	40.90	46.64	54.00	7.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

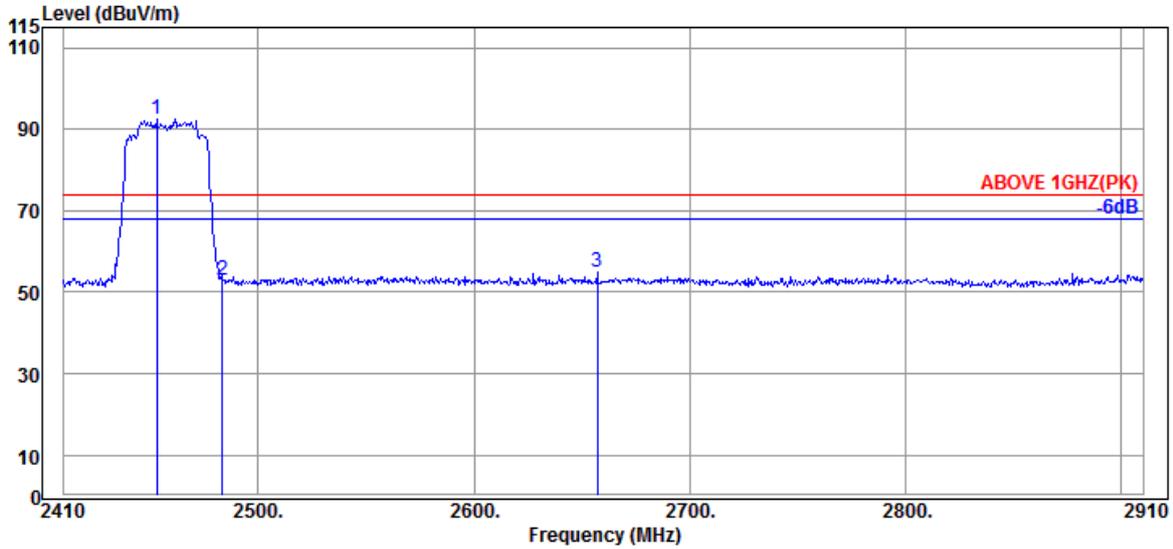

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	86.88	92.61	---	---	Peak
2483.500	32.30	7.99	34.55	47.34	53.08	74.00	20.92	Peak
2657.000	32.20	8.08	34.59	49.15	54.84	74.00	19.16	Peak

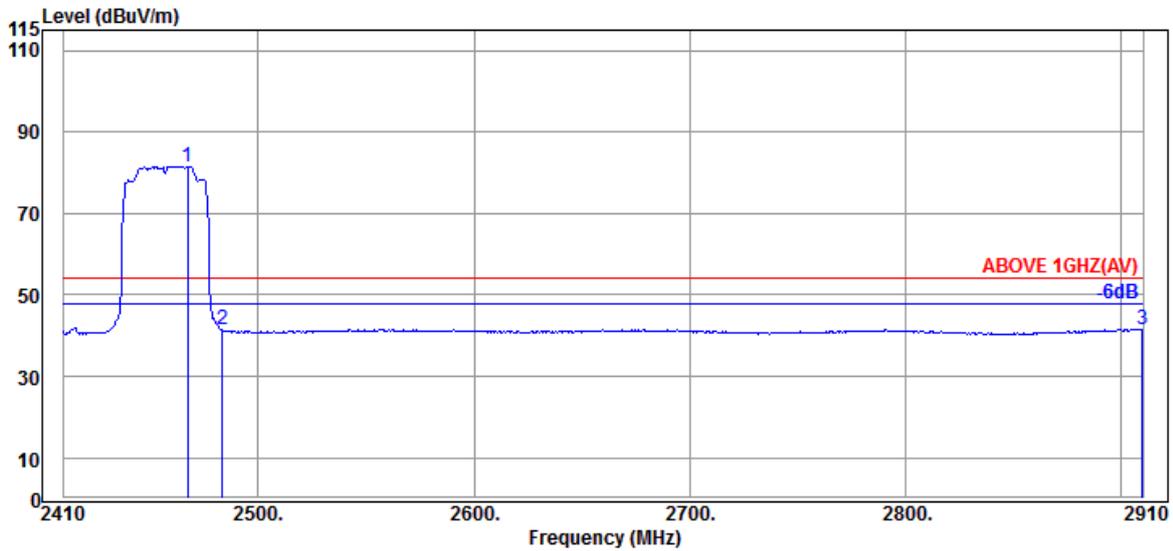


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	75.78	81.51	---	---	Average
2483.500	32.30	7.99	34.55	35.58	41.32	54.00	12.68	Average
2909.500	32.77	8.18	34.64	35.33	41.64	54.00	12.36	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

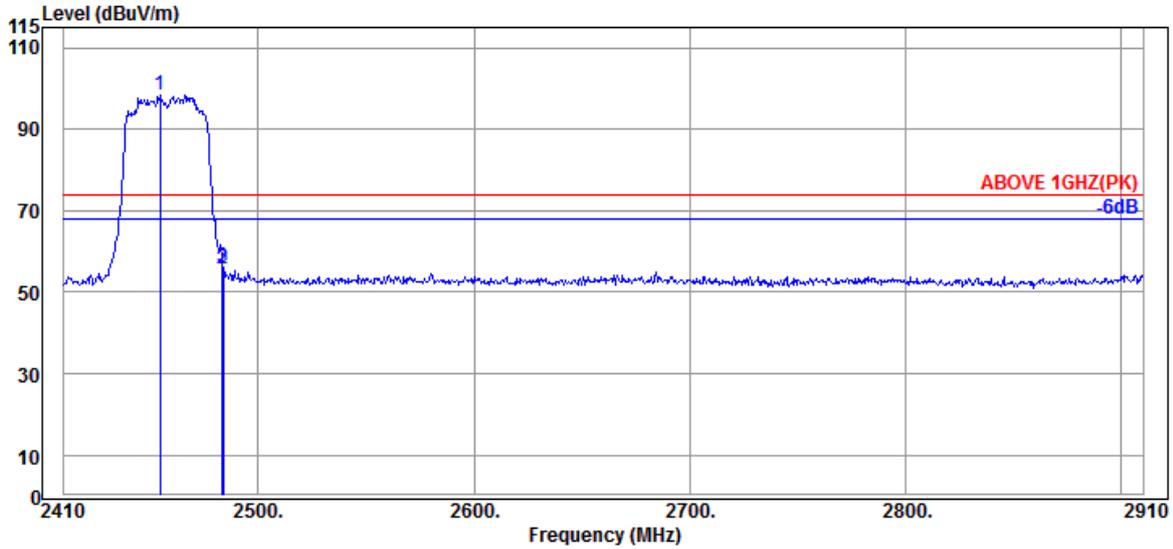

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	92.79	98.52	---	---	Peak
2483.500	32.30	7.99	34.55	50.04	55.78	74.00	18.22	Peak
2484.000	32.30	7.99	34.55	50.27	56.01	74.00	17.99	Peak

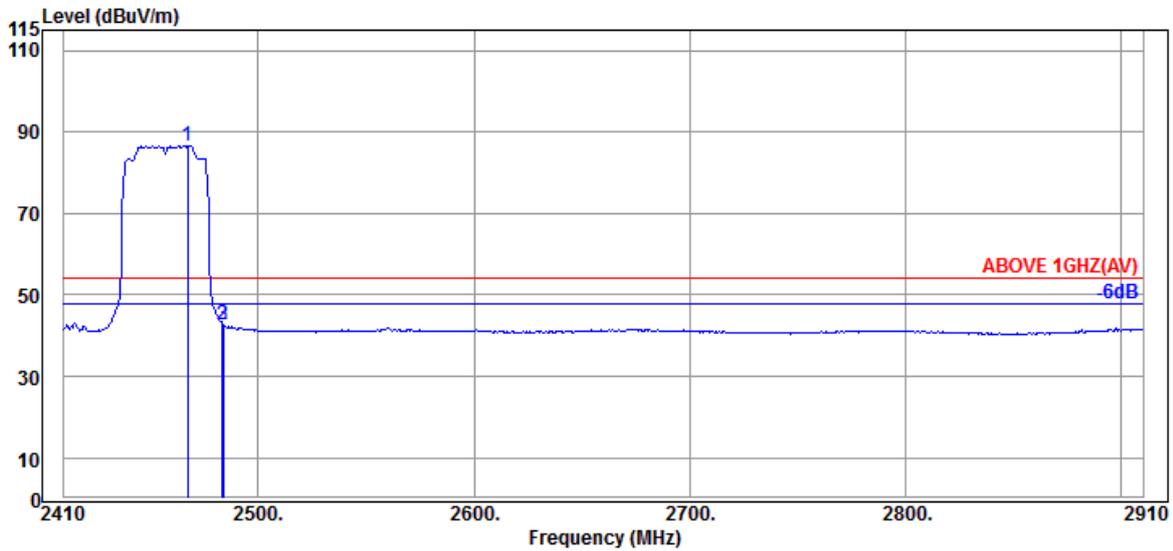


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	80.90	86.63	---	---	Average
2483.500	32.30	7.99	34.55	37.04	42.78	54.00	11.22	Average
2484.000	32.30	7.99	34.55	36.86	42.60	54.00	11.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

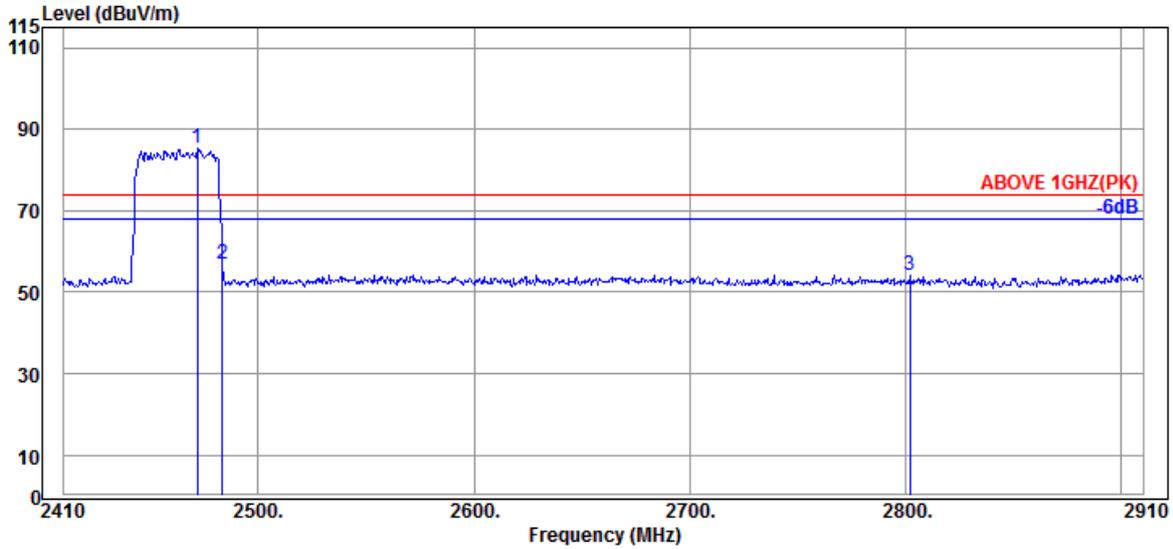

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	32.30	7.99	34.55	79.44	85.18	---	---	Peak
2483.500	32.30	7.99	34.55	51.19	56.93	74.00	17.07	Peak
2802.000	32.40	8.14	34.62	48.41	54.33	74.00	19.67	Peak

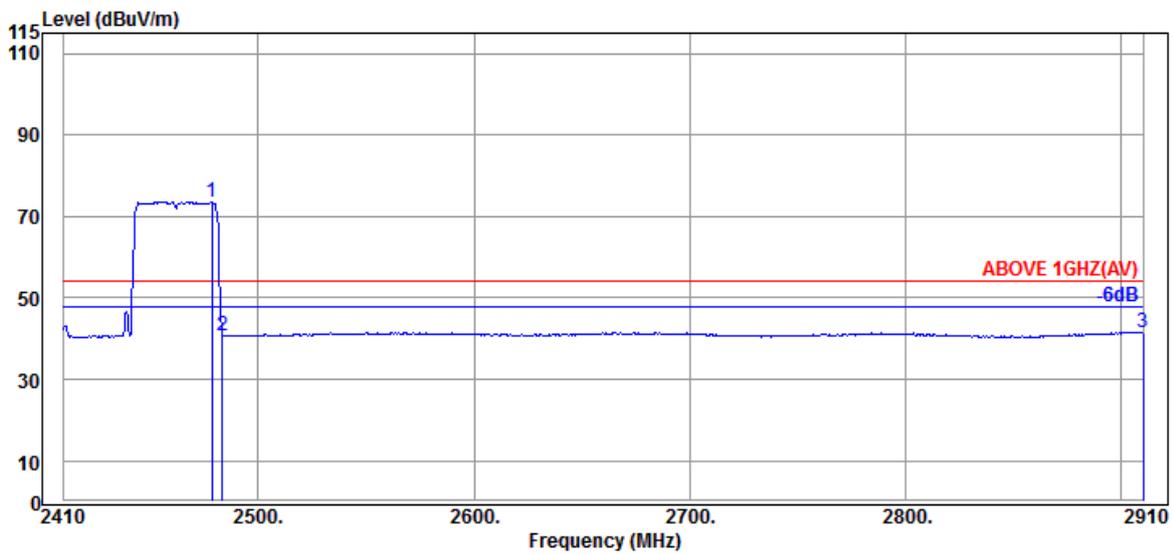


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	67.87	73.61	---	---	Average
2483.500	32.30	7.99	34.55	35.10	40.84	54.00	13.16	Average
2910.000	32.83	8.18	34.64	35.17	41.54	54.00	12.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

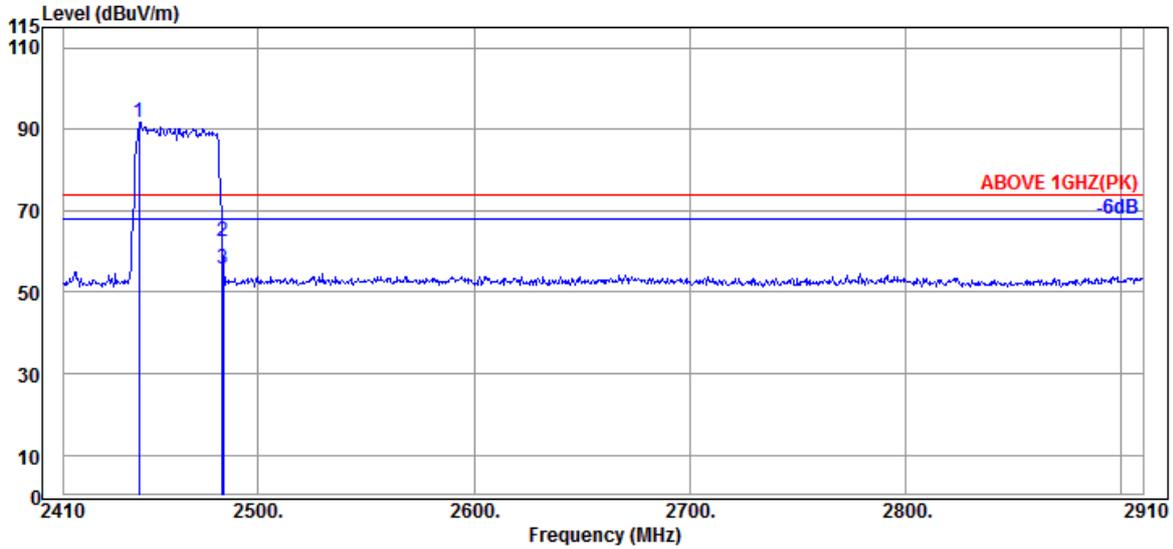

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	85.89	91.55	---	---	Peak
2483.500	32.30	7.99	34.55	56.53	62.27	74.00	11.73	Peak
2484.000	32.30	7.99	34.55	50.17	55.91	74.00	18.09	Peak

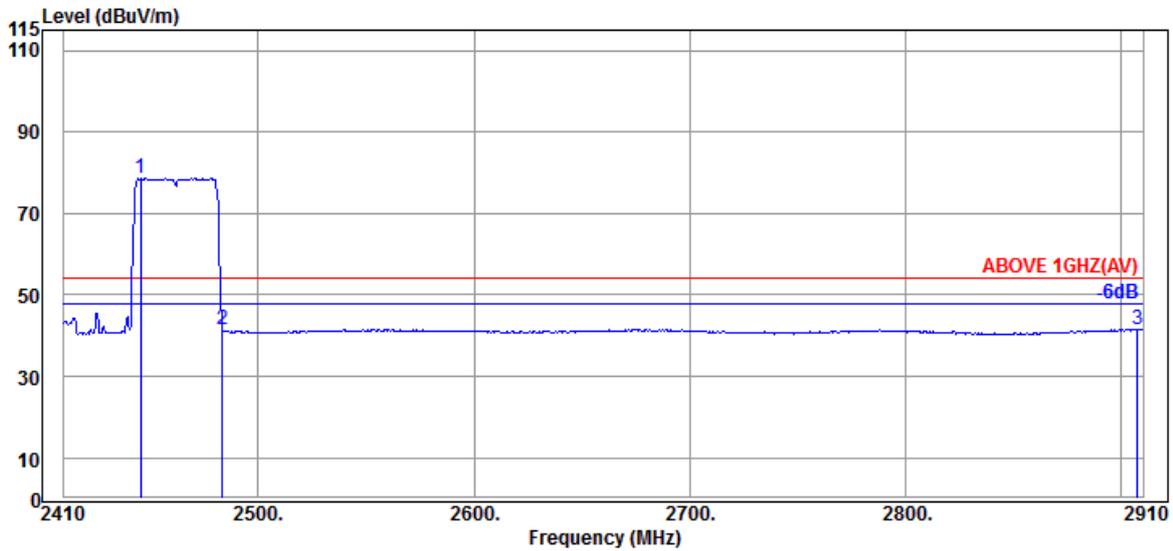


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.500	32.23	7.98	34.55	72.92	78.58	---	---	Average
2483.500	32.30	7.99	34.55	35.63	41.37	54.00	12.63	Average
2907.500	32.77	8.18	34.64	35.28	41.59	54.00	12.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

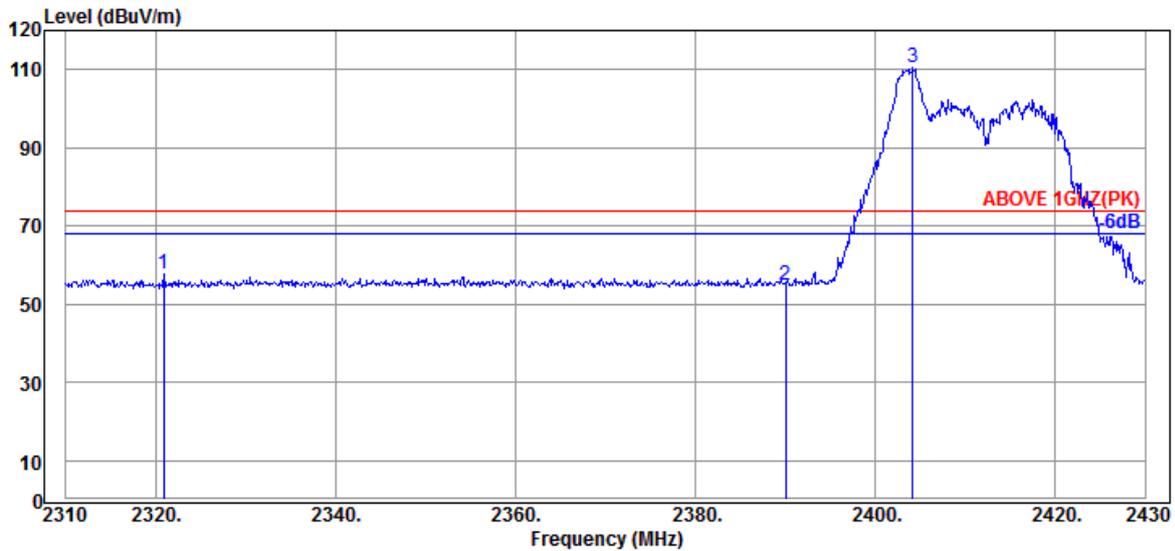

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2320.920	31.97	7.92	34.52	52.16	57.53	74.00	16.47	Peak
2390.040	31.89	7.95	34.54	49.55	54.85	74.00	19.15	Peak
@ 2404.200	31.80	7.95	34.54	105.41	110.62	---	---	Peak

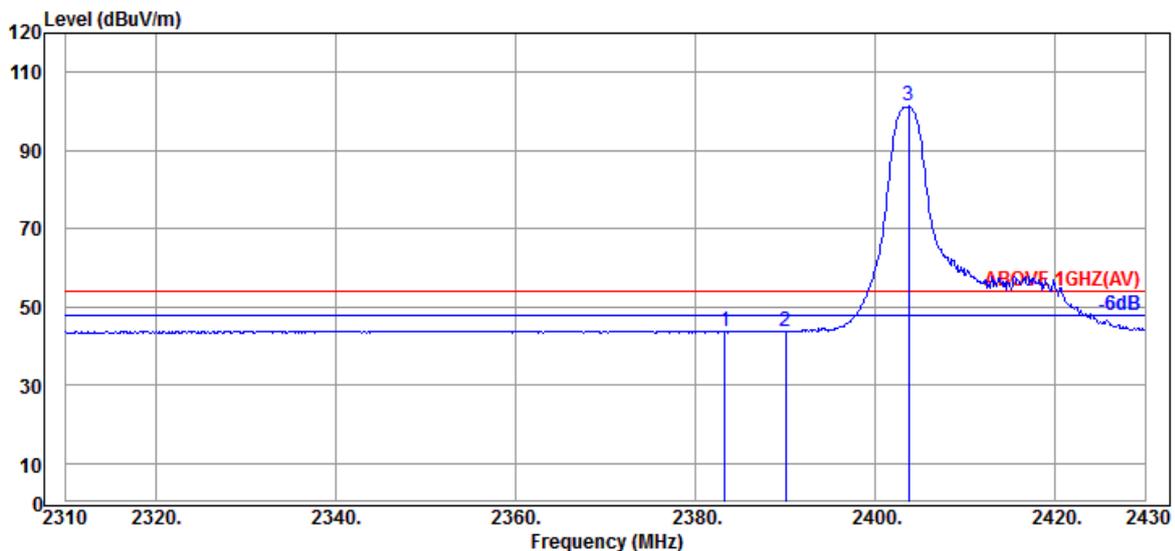


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.320	31.93	7.95	34.53	38.55	43.90	54.00	10.10	Average
2390.040	31.89	7.95	34.54	38.42	43.72	54.00	10.28	Average
@ 2403.720	31.80	7.95	34.54	96.04	101.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

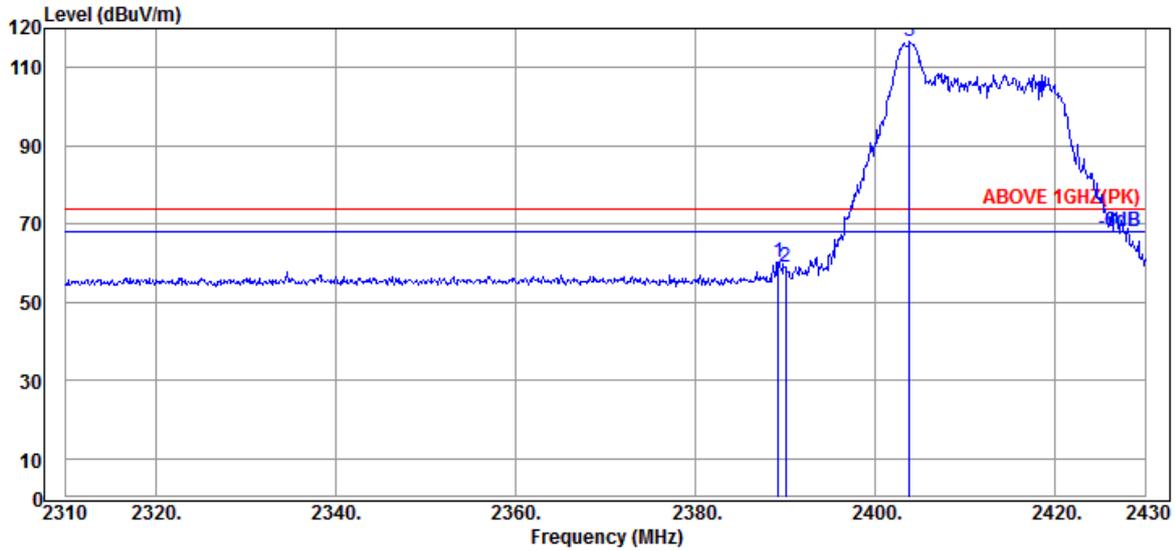

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	54.86	60.17	74.00	13.83	Peak
2390.040	31.89	7.95	34.54	53.86	59.16	74.00	14.84	Peak
@ 2403.840	31.80	7.95	34.54	111.57	116.78	---	---	Peak

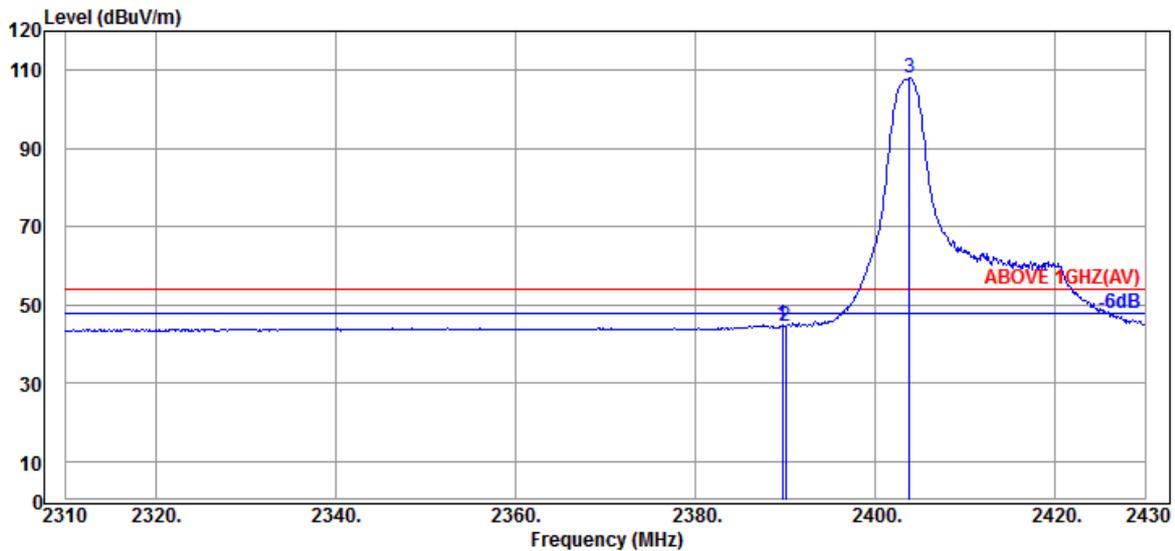


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	39.45	44.76	54.00	9.24	Average
2390.040	31.89	7.95	34.54	39.35	44.65	54.00	9.35	Average
@ 2403.840	31.80	7.95	34.54	102.77	107.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

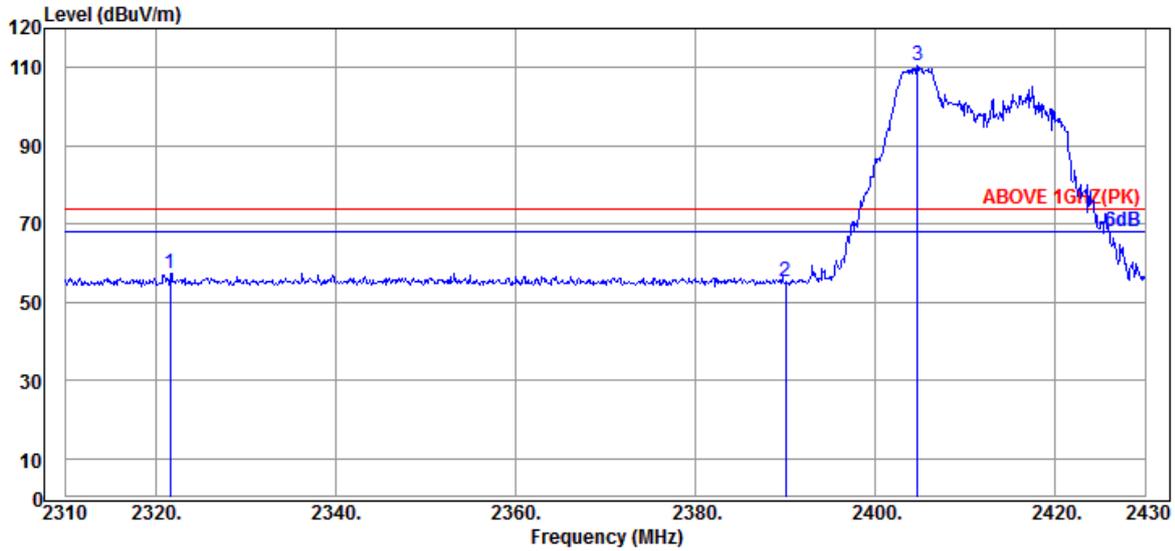

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2321.640	31.97	7.92	34.52	51.85	57.22	74.00	16.78	Peak
2390.040	31.89	7.95	34.54	49.79	55.09	74.00	18.91	Peak
@ 2404.680	31.87	7.95	34.54	105.05	110.33	---	---	Peak

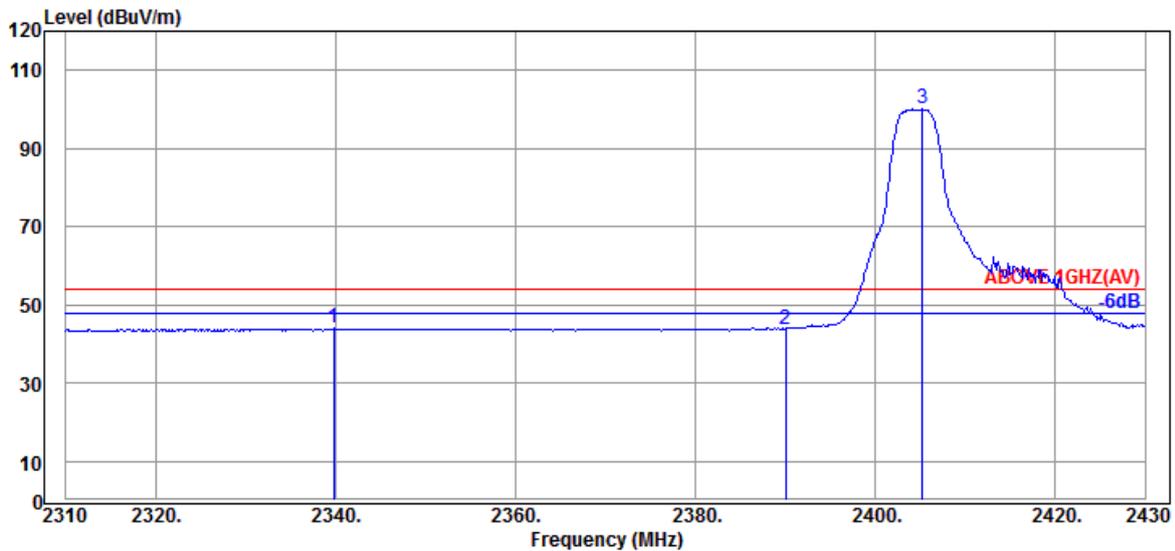


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2339.760	32.05	7.92	34.53	38.56	44.00	54.00	10.00	Average
2390.040	31.89	7.95	34.54	38.55	43.85	54.00	10.15	Average
@ 2405.280	31.87	7.95	34.54	94.78	100.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

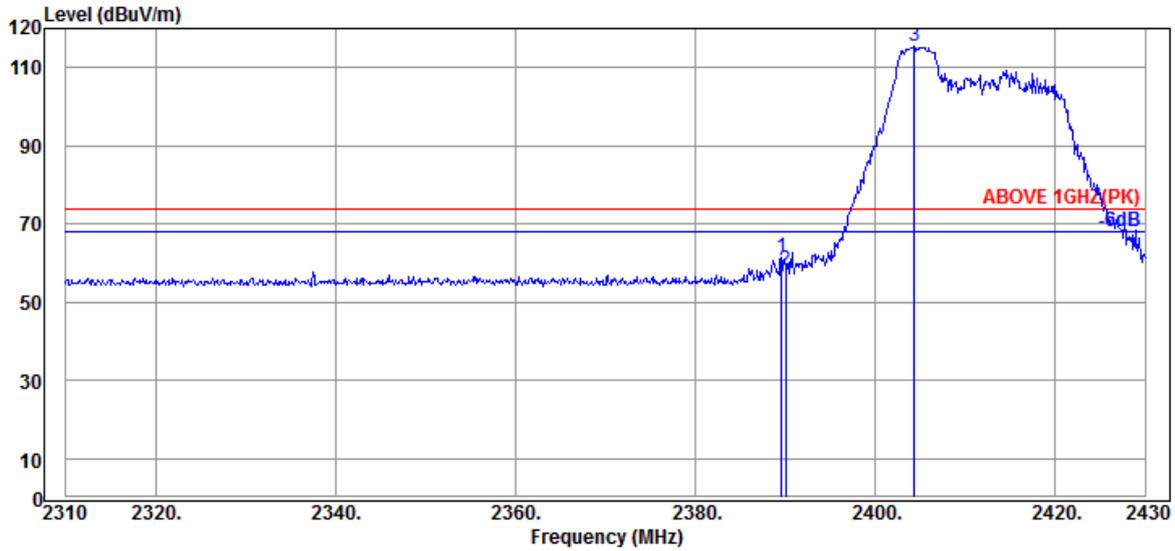

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	56.15	61.46	74.00	12.54	Peak
2390.040	31.89	7.95	34.54	52.90	58.20	74.00	15.80	Peak
@ 2404.320	31.87	7.95	34.54	110.10	115.38	---	---	Peak

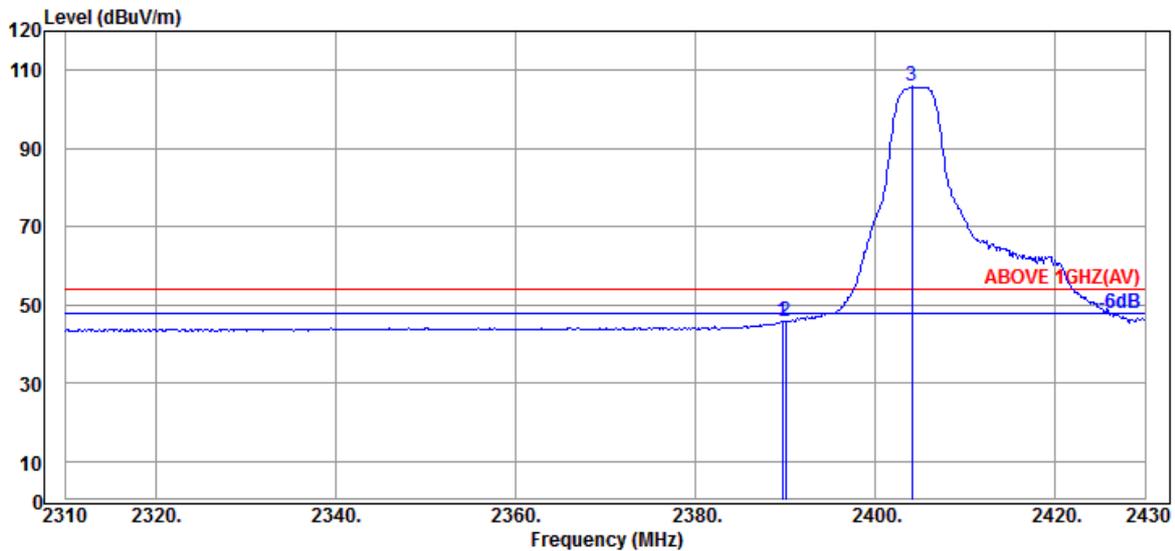


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	40.51	45.82	54.00	8.18	Average
2390.040	31.89	7.95	34.54	40.50	45.80	54.00	8.20	Average
@ 2404.080	31.80	7.95	34.54	100.57	105.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

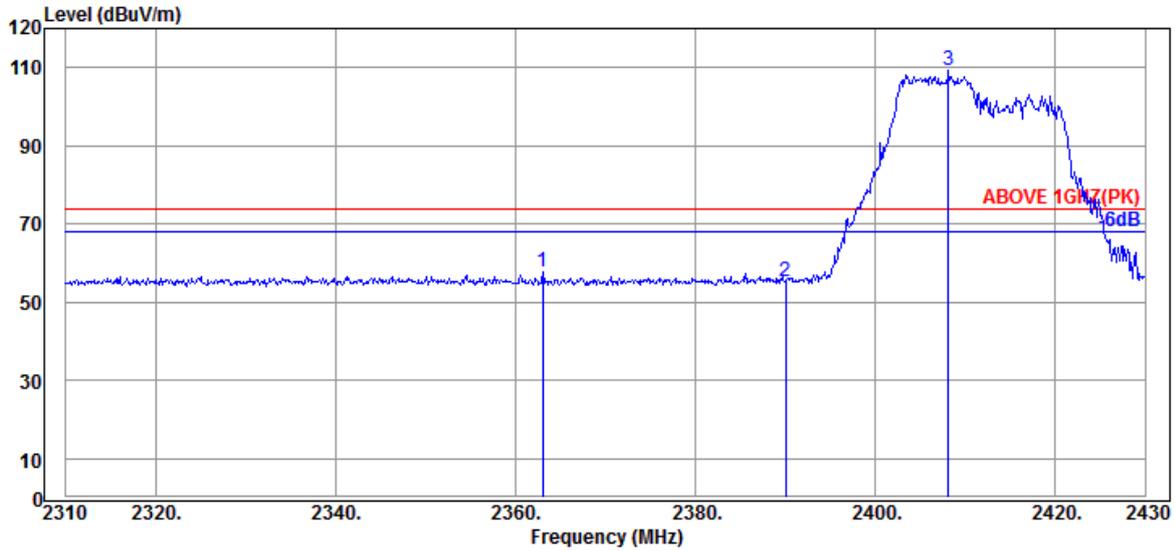

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.040	32.01	7.94	34.53	52.15	57.57	74.00	16.43	Peak
2390.040	31.89	7.95	34.54	49.90	55.20	74.00	18.80	Peak
@ 2408.160	31.87	7.96	34.54	103.90	109.19	---	---	Peak

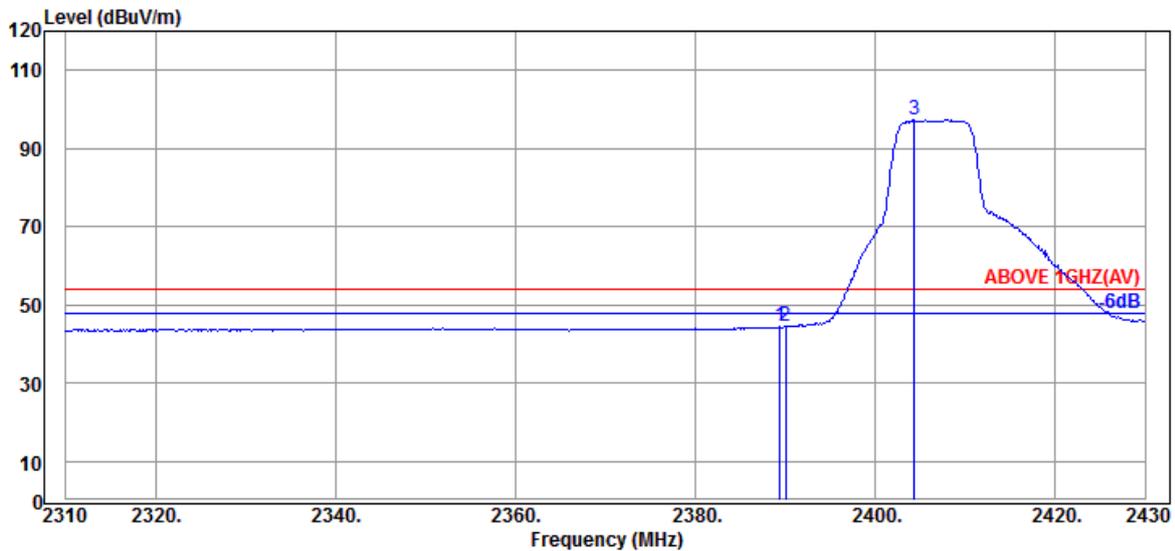


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	39.07	44.38	54.00	9.62	Average
2390.040	31.89	7.95	34.54	39.06	44.36	54.00	9.64	Average
@ 2404.320	31.87	7.95	34.54	91.97	97.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

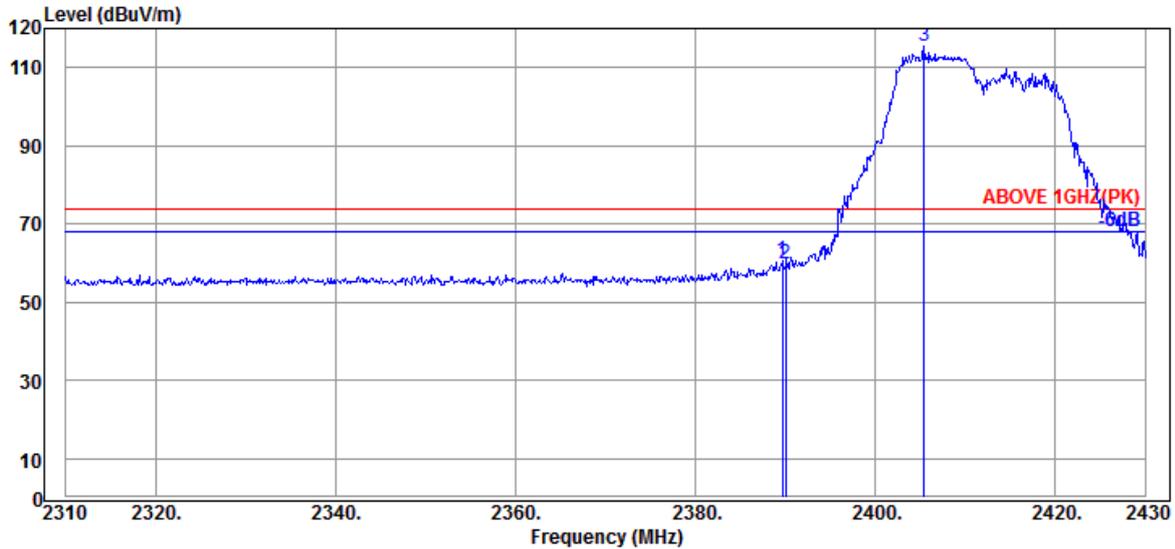

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	55.10	60.41	74.00	13.59	Peak
2390.040	31.89	7.95	34.54	54.49	59.79	74.00	14.21	Peak
@ 2405.400	31.87	7.95	34.54	110.19	115.47	---	---	Peak

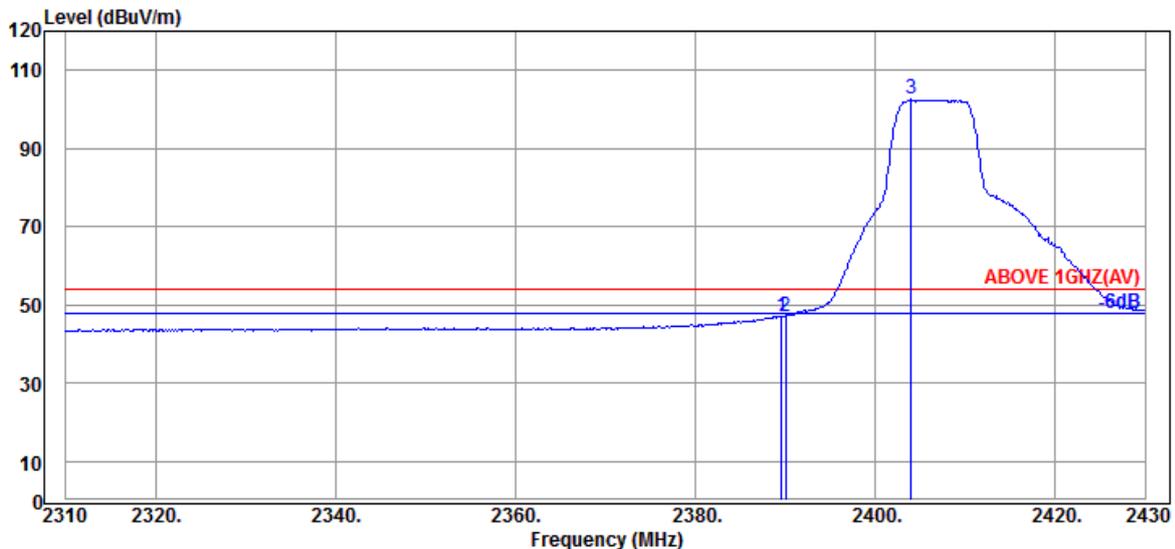


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	41.87	47.18	54.00	6.82	Average
2390.040	31.89	7.95	34.54	41.79	47.09	54.00	6.91	Average
@ 2403.960	31.80	7.95	34.54	97.27	102.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

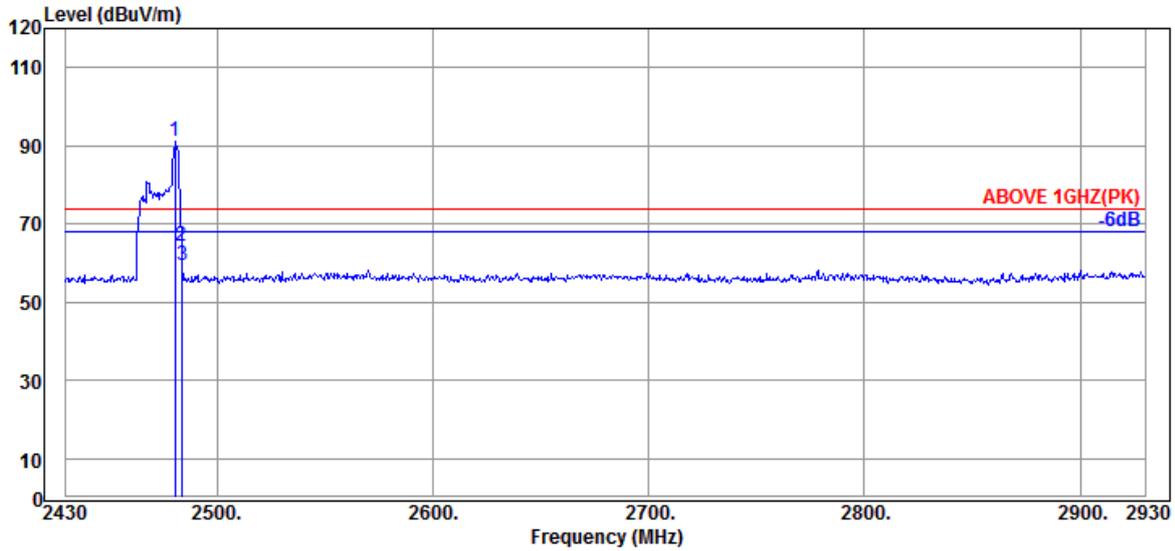

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	32.30	7.99	34.55	85.60	91.34	---	---	Peak
	2483.500	32.30	7.99	34.55	58.55	64.29	74.00	9.71	Peak
	2484.000	32.30	7.99	34.55	53.62	59.36	74.00	14.64	Peak

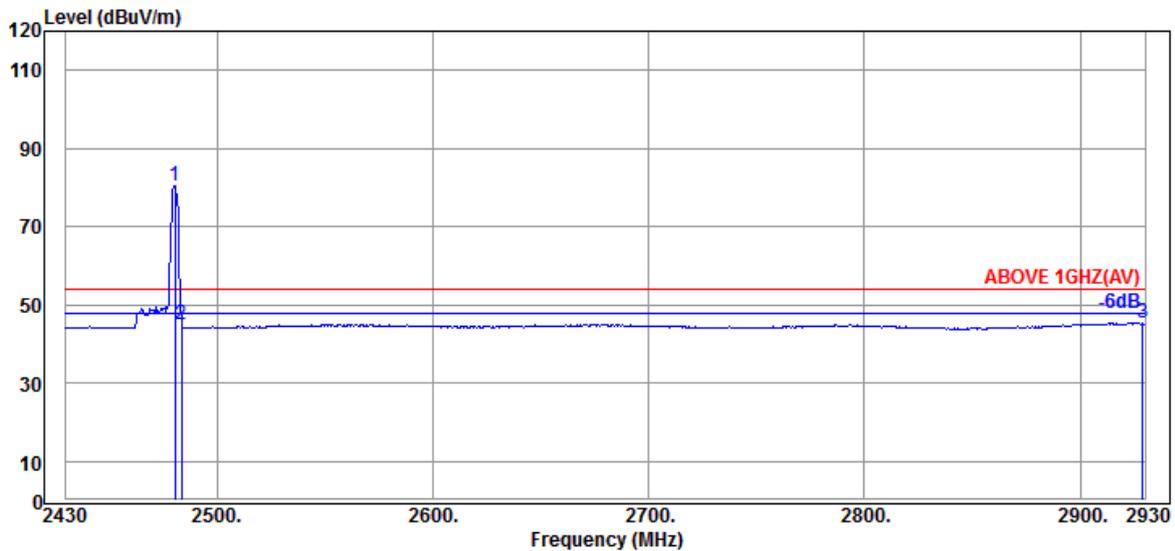


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	32.30	7.99	34.55	74.73	80.47	---	---	Average
	2483.500	32.30	7.99	34.55	39.02	44.76	54.00	9.24	Average
	2929.000	32.97	8.19	34.65	38.83	45.34	54.00	8.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

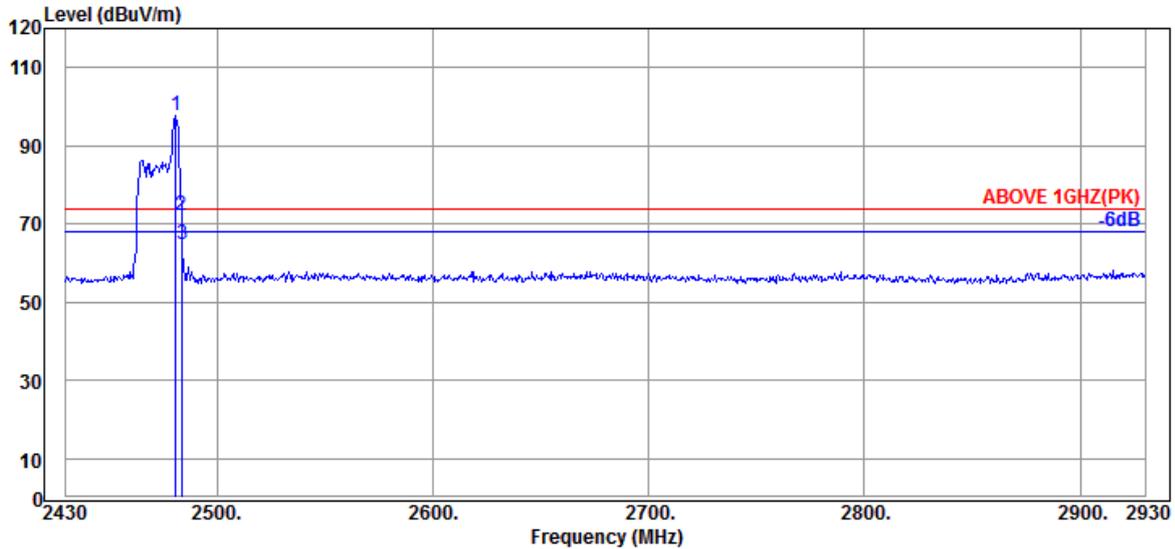

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	91.89	97.63	---	---	Peak
2483.500	32.30	7.99	34.55	66.43	72.17	74.00	1.83	Peak
2484.000	32.30	7.99	34.55	59.09	64.83	74.00	9.17	Peak

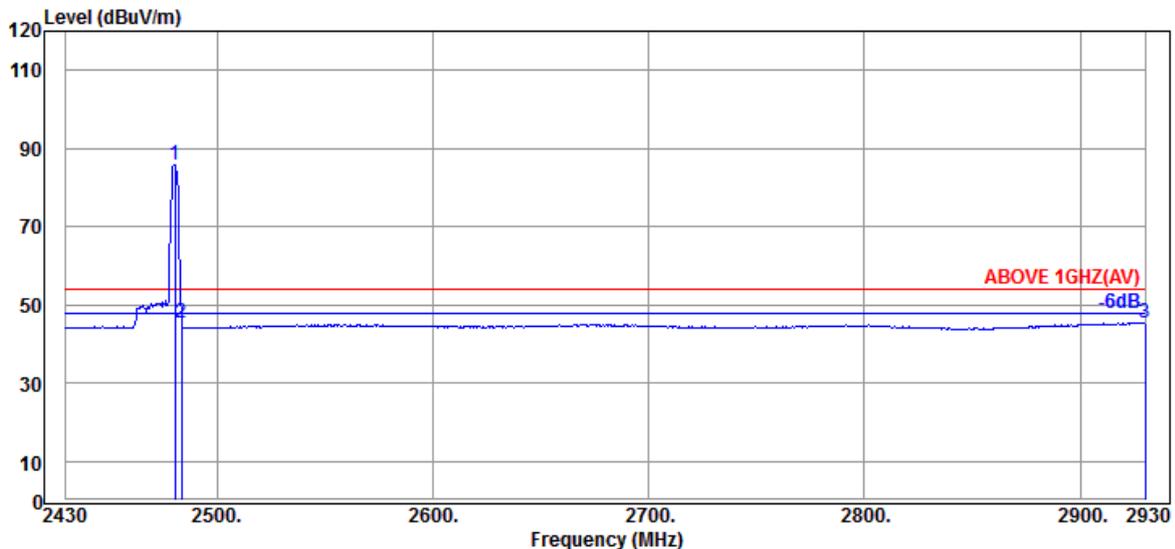


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	79.99	85.73	---	---	Average
2483.500	32.30	7.99	34.55	39.65	45.39	54.00	8.61	Average
2930.000	32.97	8.19	34.65	39.01	45.52	54.00	8.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

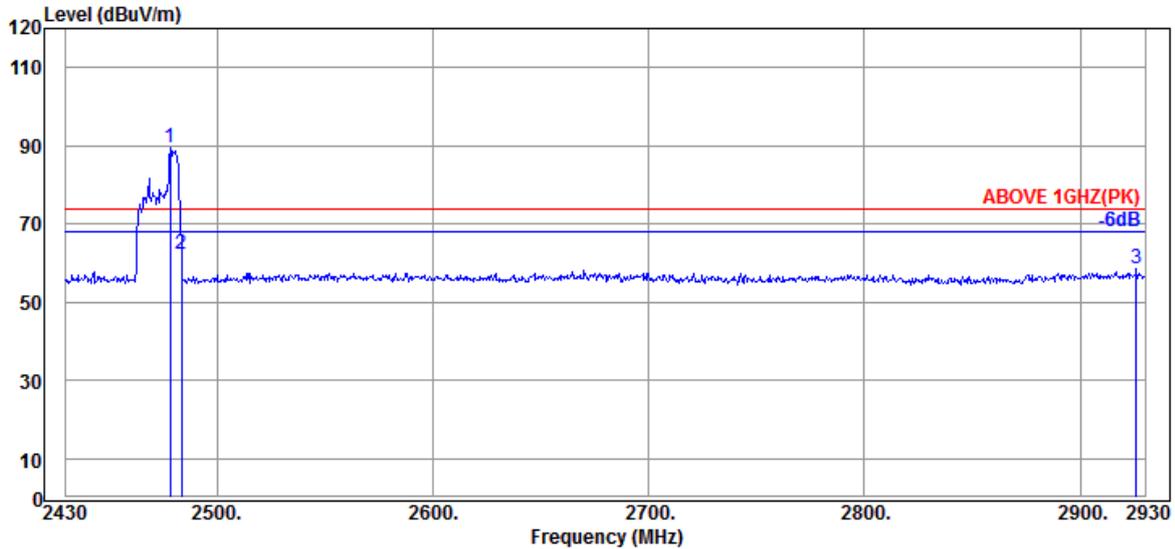

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	83.61	89.35	---	---	Peak
2483.500	32.30	7.99	34.55	56.54	62.28	74.00	11.72	Peak
2926.000	32.90	8.19	34.65	51.91	58.35	74.00	15.65	Peak

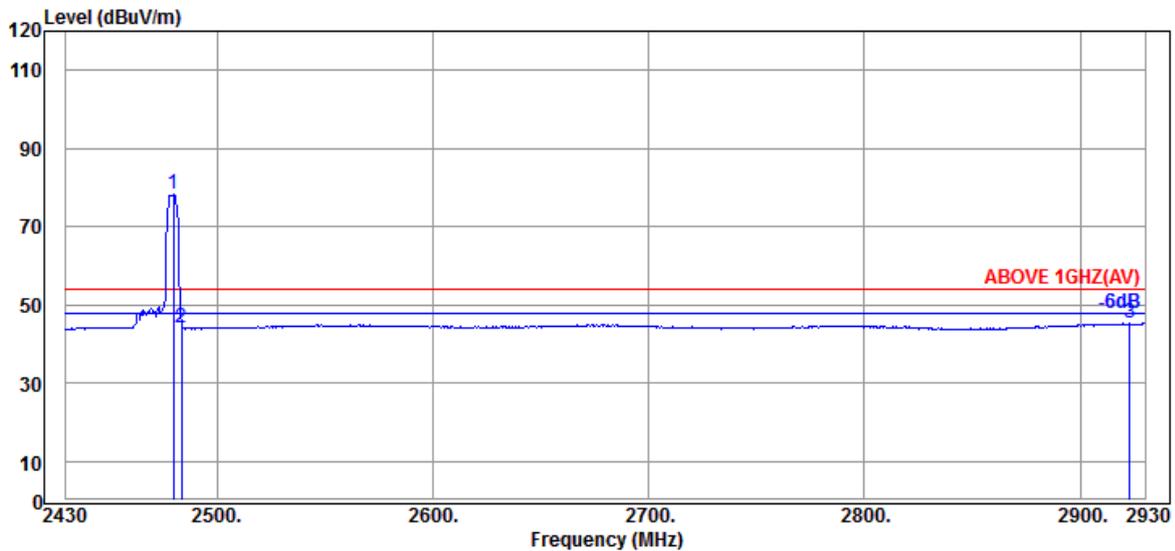


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	72.46	78.20	---	---	Average
2483.500	32.30	7.99	34.55	38.50	44.24	54.00	9.76	Average
2923.000	32.90	8.19	34.64	38.81	45.26	54.00	8.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

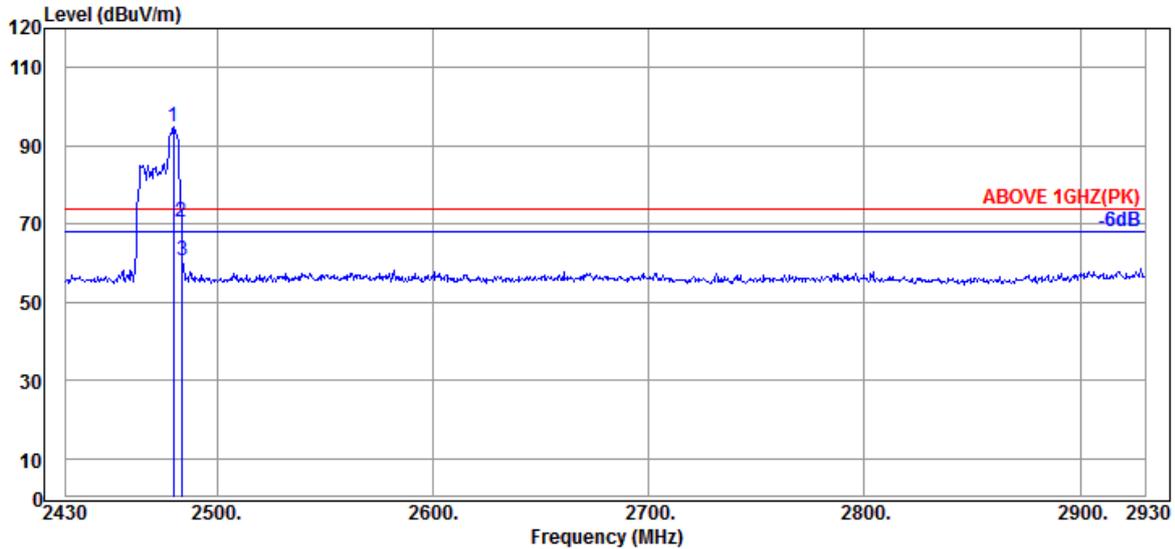

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	89.23	94.97	---	---	Peak
2483.500	32.30	7.99	34.55	64.72	70.46	74.00	3.54	Peak
2484.000	32.30	7.99	34.55	54.68	60.42	74.00	13.58	Peak

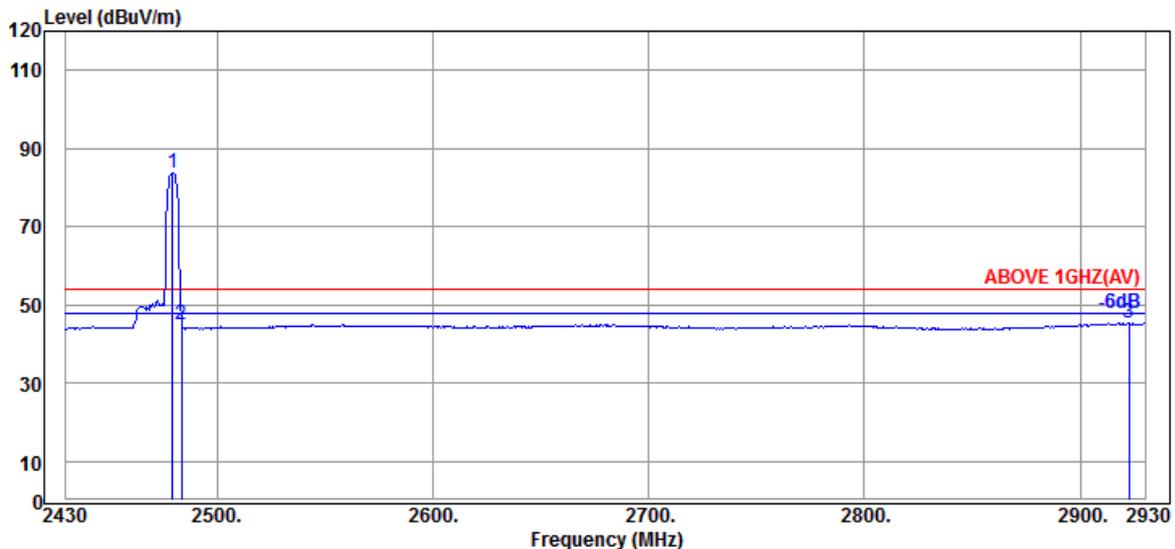


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	78.06	83.80	---	---	Average
2483.500	32.30	7.99	34.55	39.40	45.14	54.00	8.86	Average
2922.500	32.90	8.19	34.64	38.85	45.30	54.00	8.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

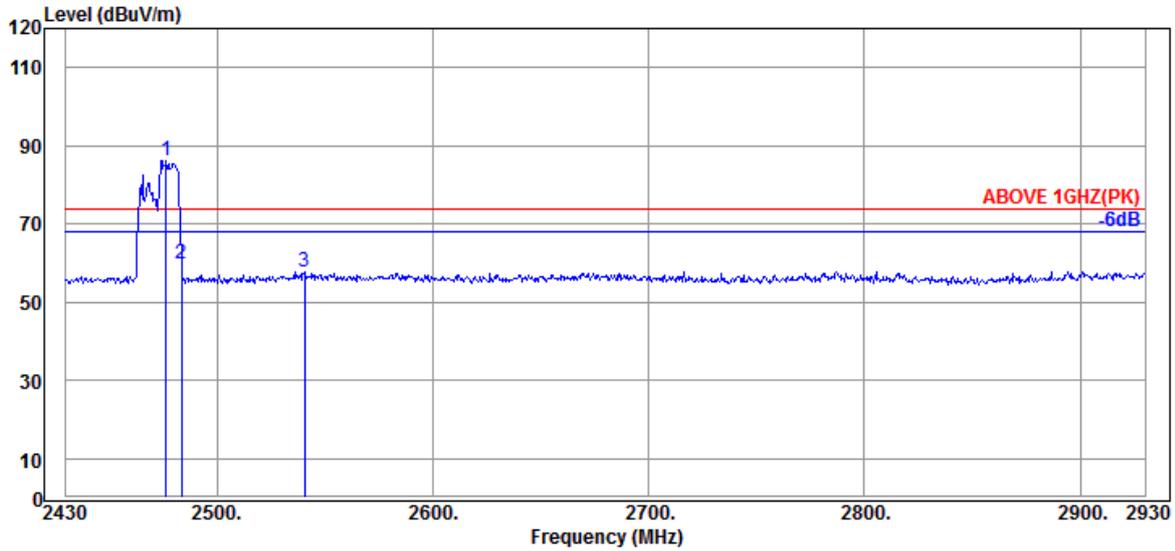

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	32.30	7.99	34.55	80.55	86.29	---	---	Peak
2483.500	32.30	7.99	34.55	53.96	59.70	74.00	14.30	Peak
2540.500	32.47	8.02	34.57	51.86	57.78	74.00	16.22	Peak

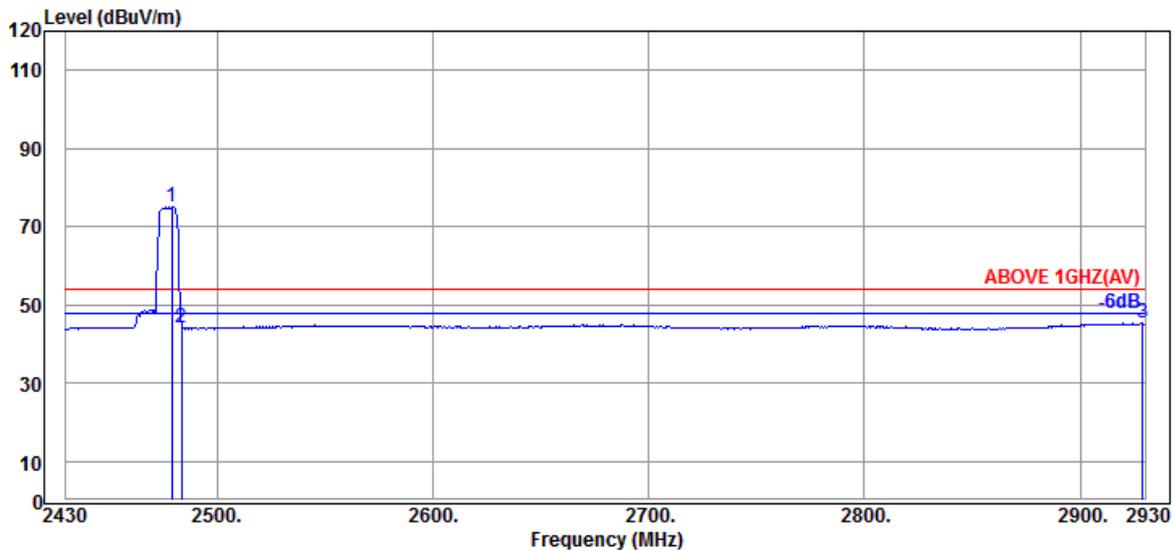


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	69.28	75.02	---	---	Average
2483.500	32.30	7.99	34.55	38.47	44.21	54.00	9.79	Average
2929.000	32.97	8.19	34.65	38.74	45.25	54.00	8.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

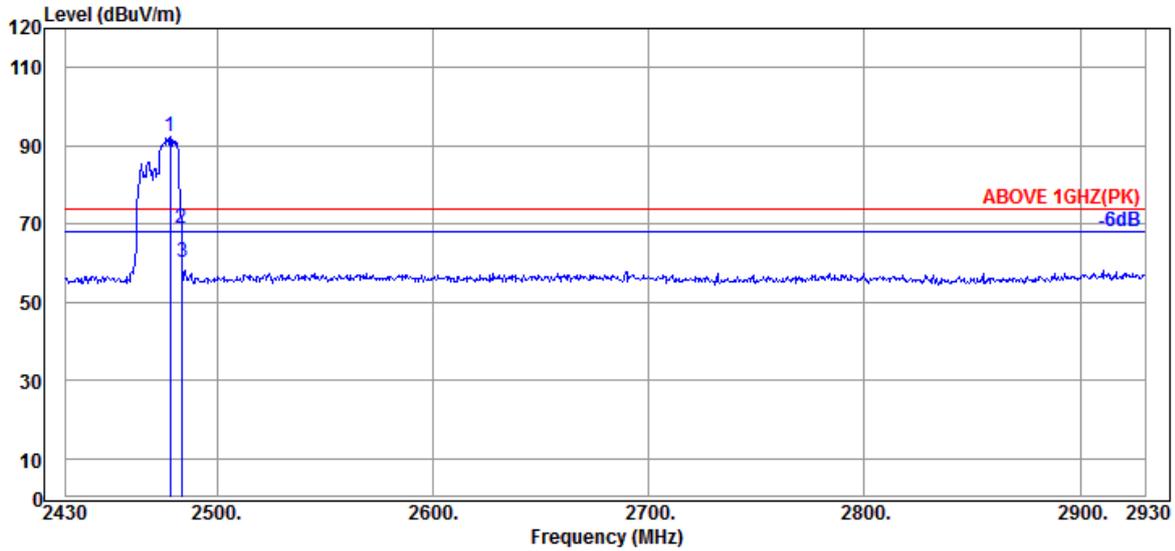

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	86.75	92.49	---	---	Peak
2483.500	32.30	7.99	34.55	63.28	69.02	74.00	4.98	Peak
2484.000	32.30	7.99	34.55	54.51	60.25	74.00	13.75	Peak

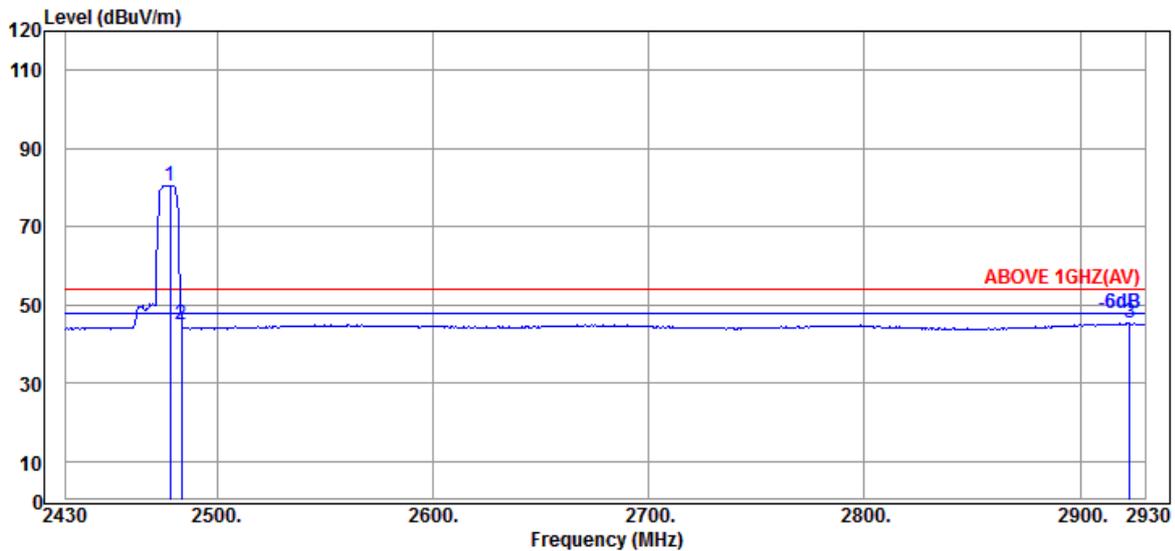


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	74.66	80.40	---	---	Average
2483.500	32.30	7.99	34.55	39.11	44.85	54.00	9.15	Average
2923.000	32.90	8.19	34.64	38.93	45.38	54.00	8.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

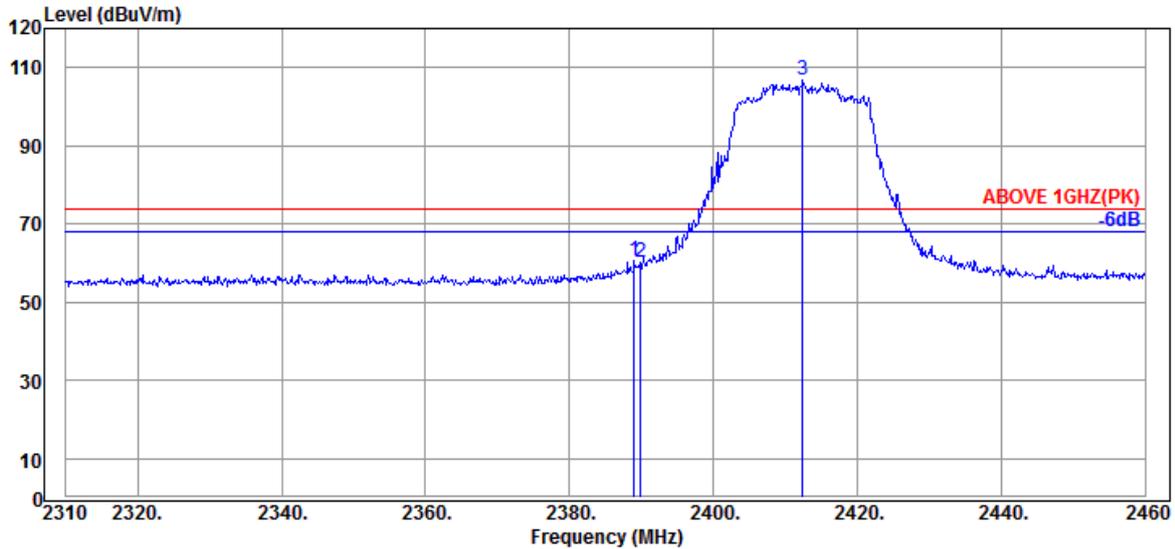

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	31.89	7.95	34.53	55.19	60.50	74.00	13.50	Peak
2389.950	31.89	7.95	34.54	54.95	60.25	74.00	13.75	Peak
@ 2412.450	31.94	7.96	34.54	101.62	106.98	---	---	Peak

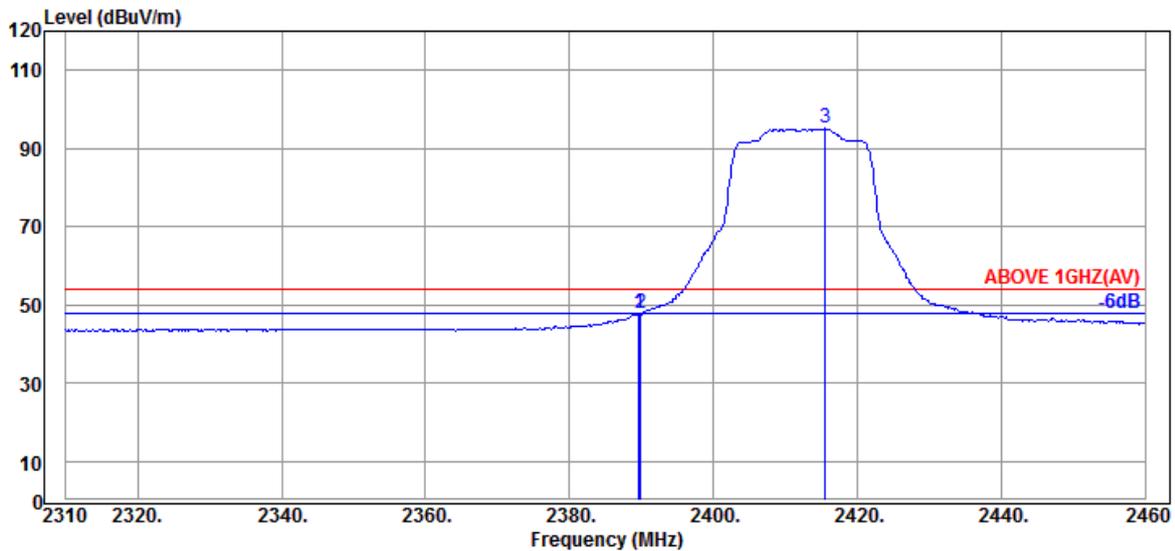


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	42.51	47.82	54.00	6.18	Average
2389.950	31.89	7.95	34.54	42.51	47.81	54.00	6.19	Average
@ 2415.600	31.94	7.96	34.54	89.84	95.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

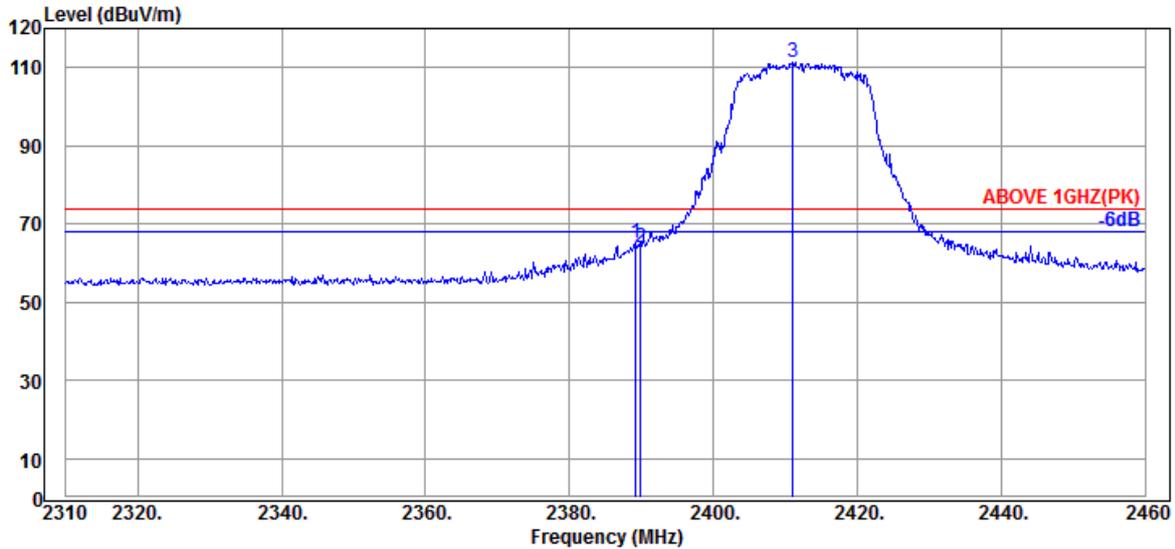

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	60.04	65.35	74.00	8.65	Peak
2389.950	31.89	7.95	34.54	58.79	64.09	74.00	9.91	Peak
@ 2411.100	31.87	7.96	34.54	105.93	111.22	---	---	Peak

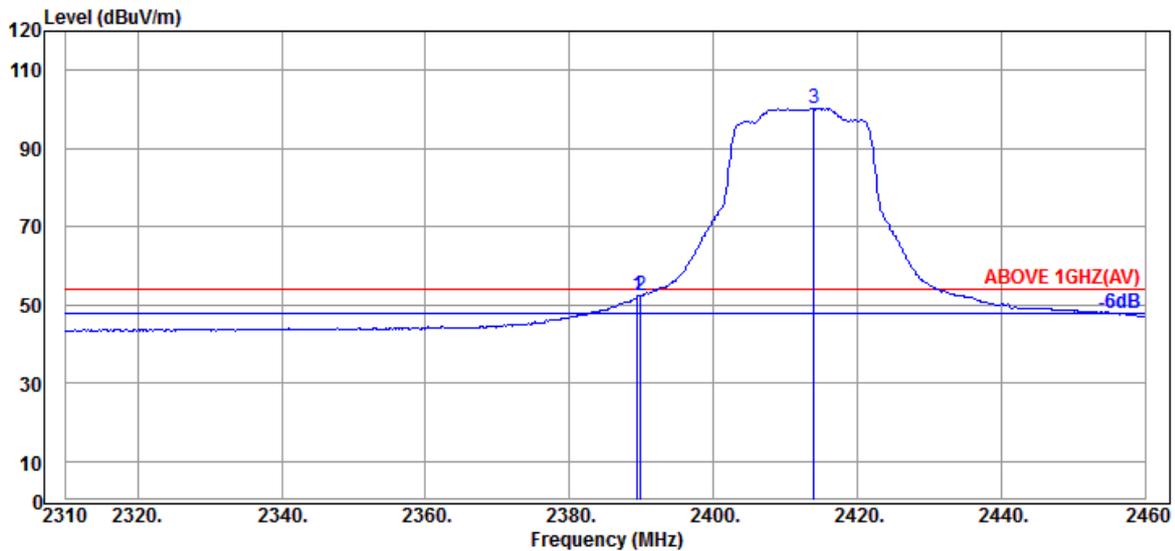


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	47.02	52.33	54.00	1.67	Average
2389.950	31.89	7.95	34.54	46.88	52.18	54.00	1.82	Average
@ 2413.950	31.94	7.96	34.54	94.89	100.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

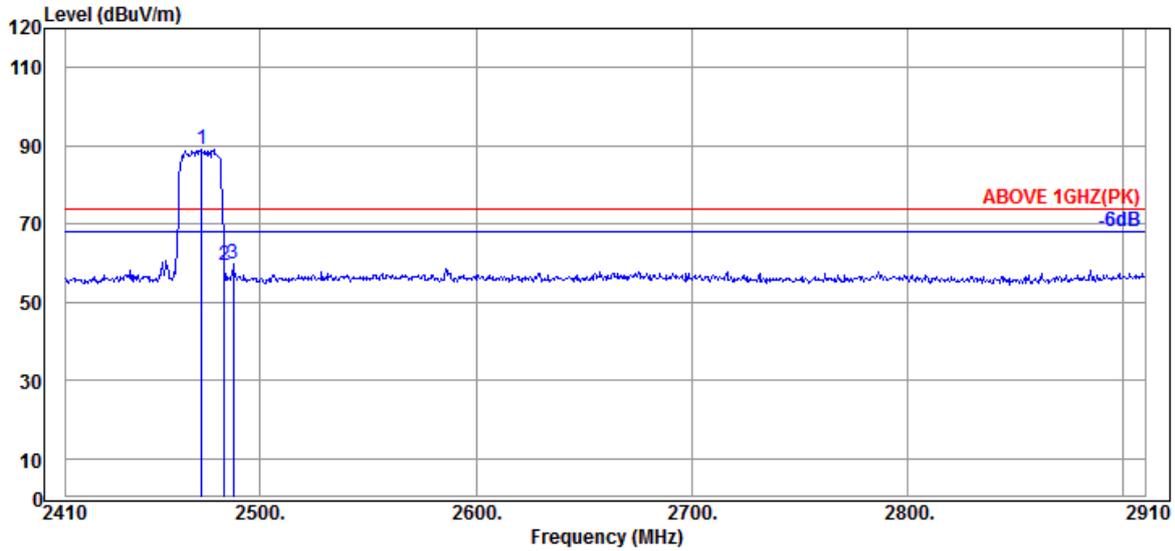

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.000	32.30	7.99	34.55	83.52	89.26	---	---	Peak
2483.500	32.30	7.99	34.55	53.75	59.49	74.00	14.51	Peak
2487.500	32.30	8.00	34.55	53.87	59.62	74.00	14.38	Peak

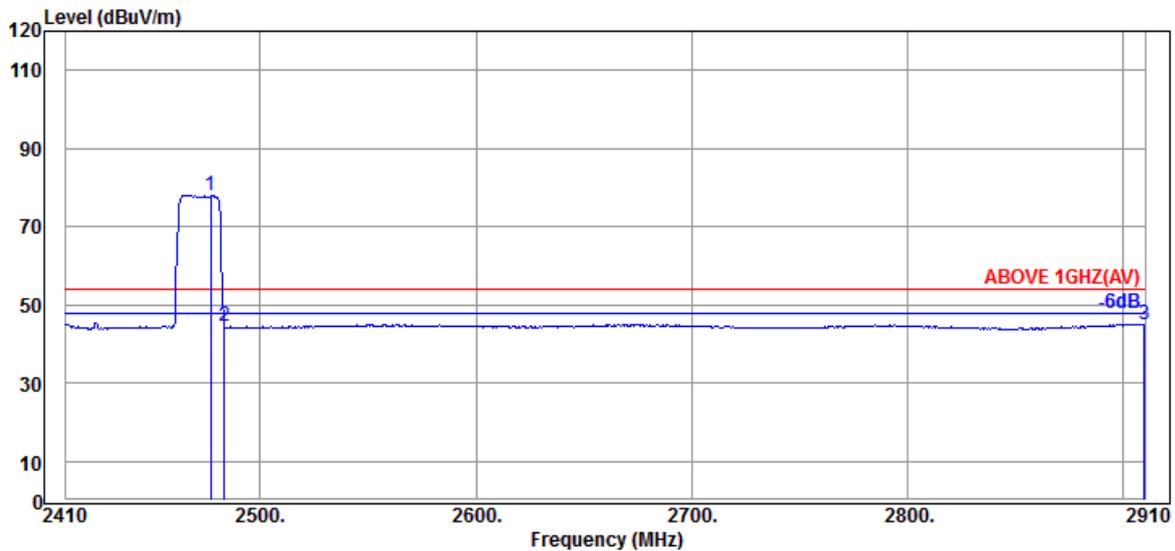


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	32.30	7.99	34.55	72.33	78.07	---	---	Average
2483.500	32.30	7.99	34.55	38.65	44.39	54.00	9.61	Average
2909.500	32.77	8.18	34.64	38.84	45.15	54.00	8.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

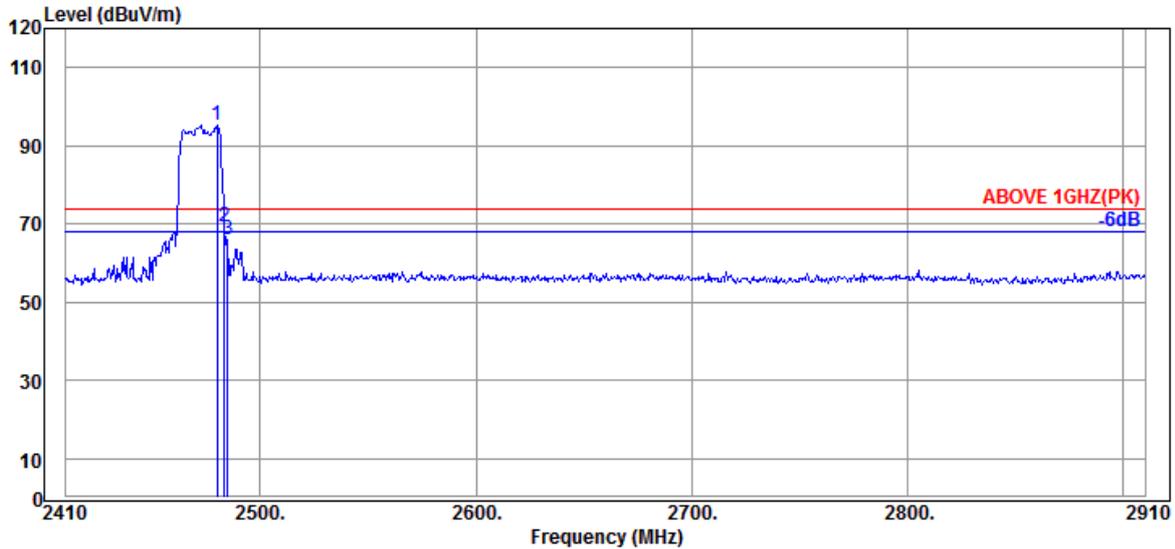

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	89.63	95.37	---	---	Peak
2483.500	32.30	7.99	34.55	63.66	69.40	74.00	4.60	Peak
2485.000	32.30	7.99	34.55	60.37	66.11	74.00	7.89	Peak

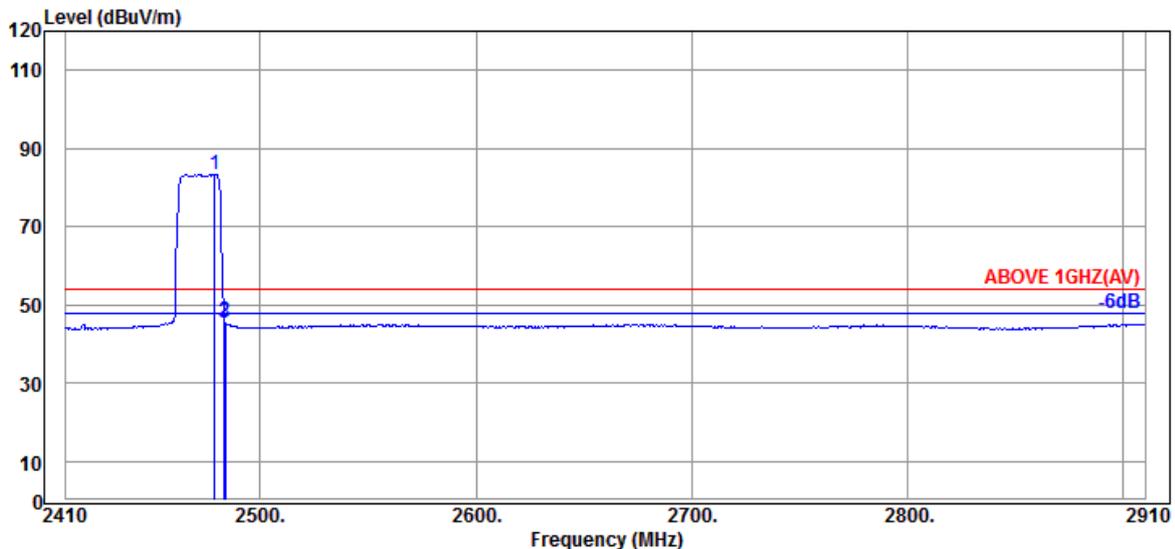


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	77.66	83.40	---	---	Average
2483.500	32.30	7.99	34.55	40.04	45.78	54.00	8.22	Average
2484.000	32.30	7.99	34.55	39.52	45.26	54.00	8.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

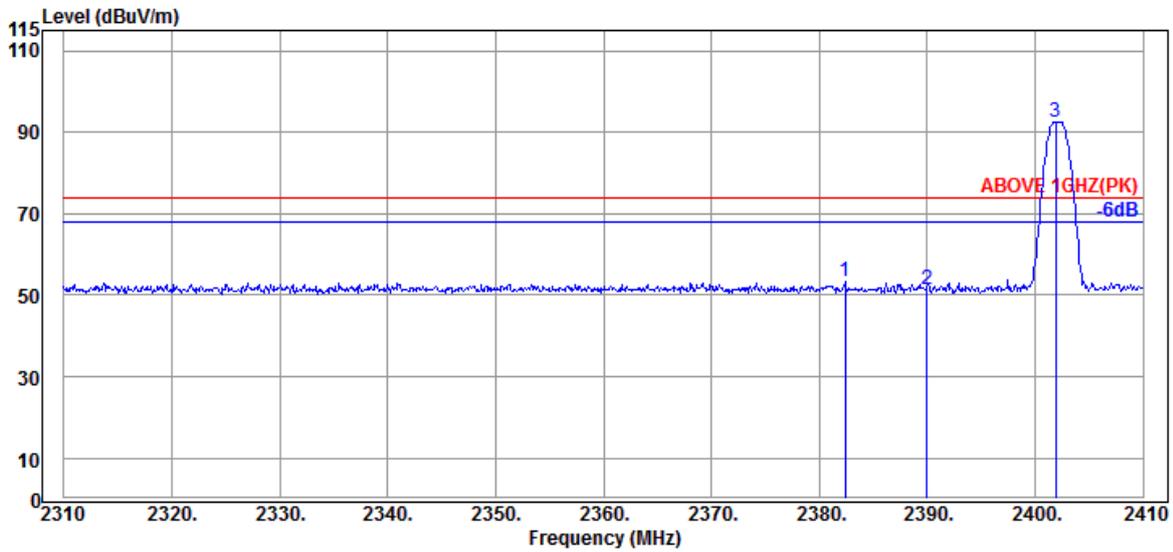

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.400	31.93	7.95	34.53	47.84	53.19	74.00	20.81	Peak
2390.000	31.89	7.95	34.54	46.05	51.35	74.00	22.65	Peak
@ 2401.900	31.80	7.95	34.54	87.26	92.47	---	---	Peak

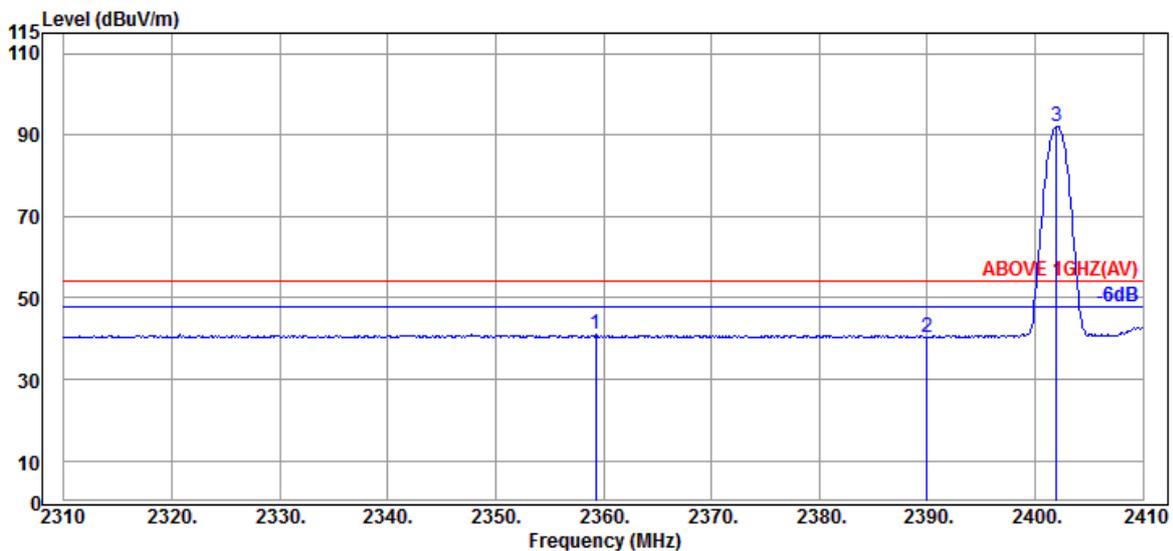


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2359.300	32.06	7.93	34.53	35.50	40.96	54.00	13.04	Average
2390.000	31.89	7.95	34.54	35.16	40.46	54.00	13.54	Average
@ 2402.000	31.80	7.95	34.54	86.84	92.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

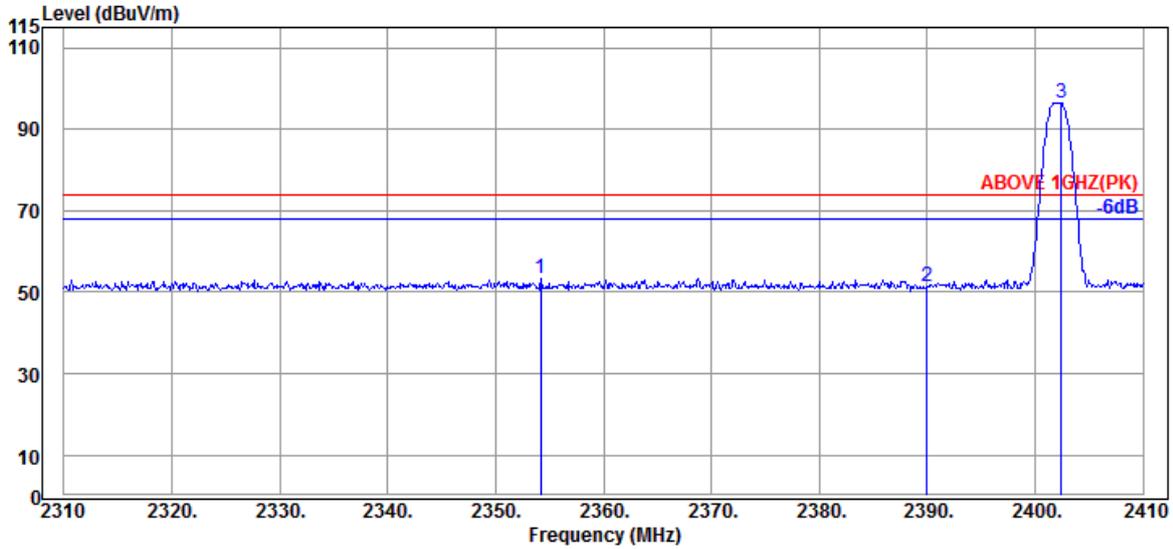

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.200	32.10	7.93	34.53	47.82	53.32	74.00	20.68	Peak
2390.000	31.89	7.95	34.54	45.94	51.24	74.00	22.76	Peak
@ 2402.400	31.80	7.95	34.54	91.25	96.46	---	---	Peak

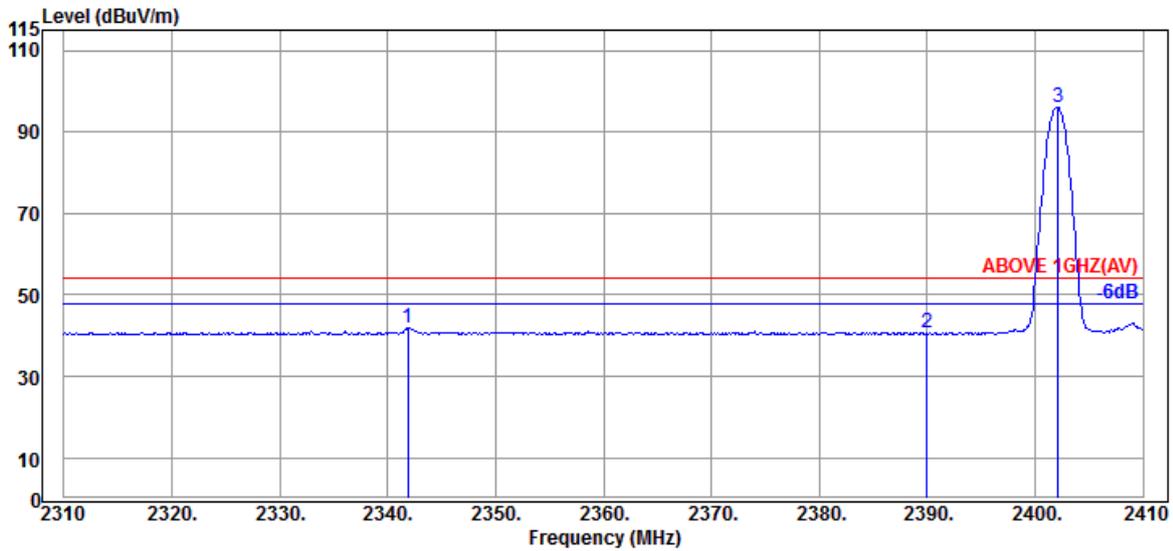


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	32.05	7.92	34.53	36.54	41.98	54.00	12.02	Average
2390.000	31.89	7.95	34.54	35.36	40.66	54.00	13.34	Average
@ 2402.100	31.80	7.95	34.54	90.80	96.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

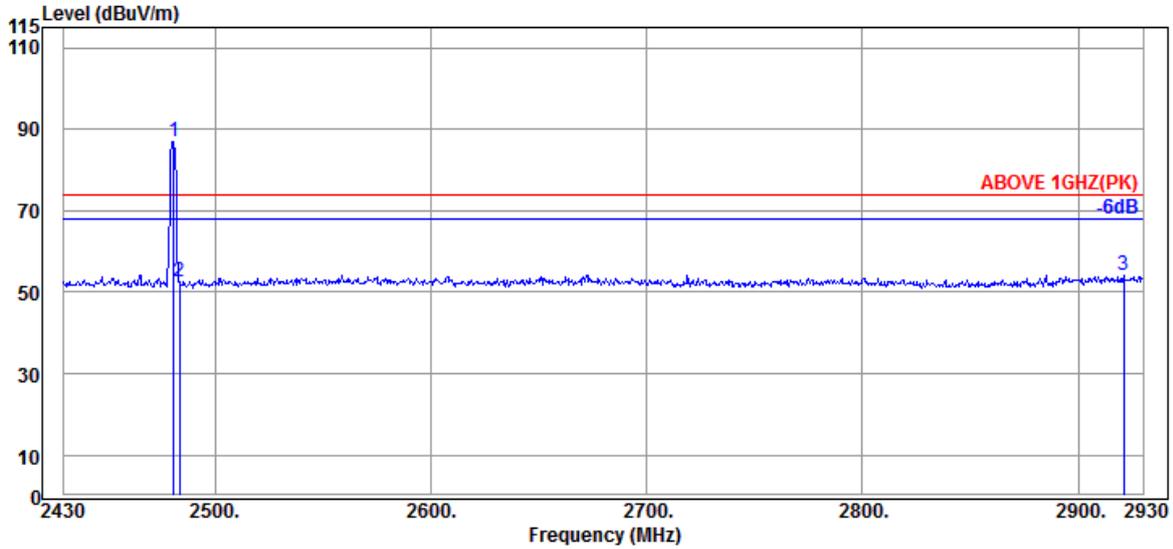

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	81.39	87.13	---	---	Peak
2483.500	32.30	7.99	34.55	46.81	52.55	74.00	21.45	Peak
2921.000	32.90	8.19	34.64	47.84	54.29	74.00	19.71	Peak

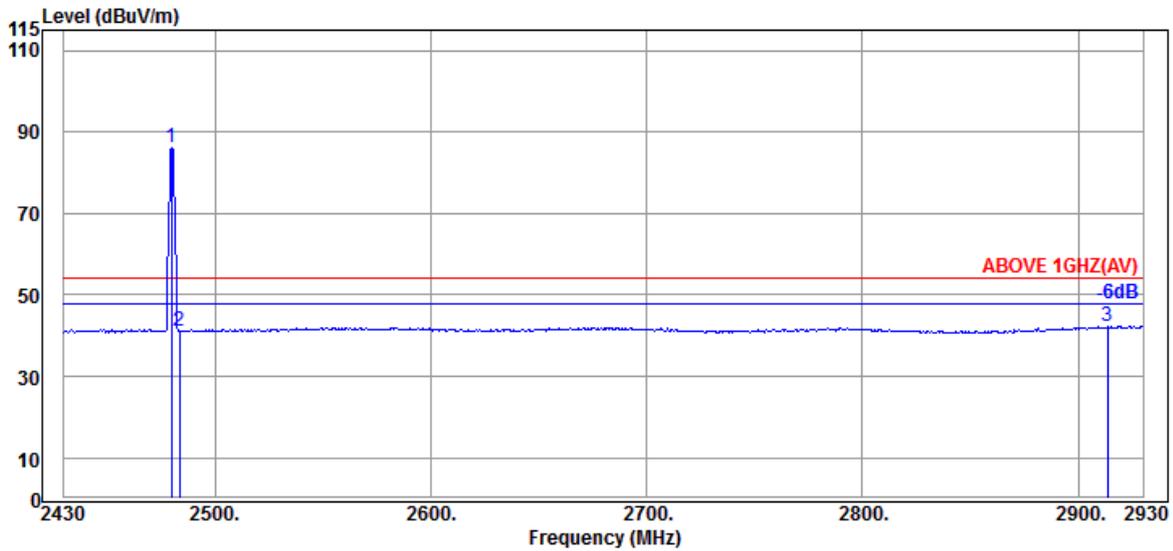


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	80.59	86.33	---	---	Average
2483.500	32.30	7.99	34.55	35.19	40.93	54.00	13.07	Average
2913.500	32.83	8.18	34.64	36.01	42.38	54.00	11.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

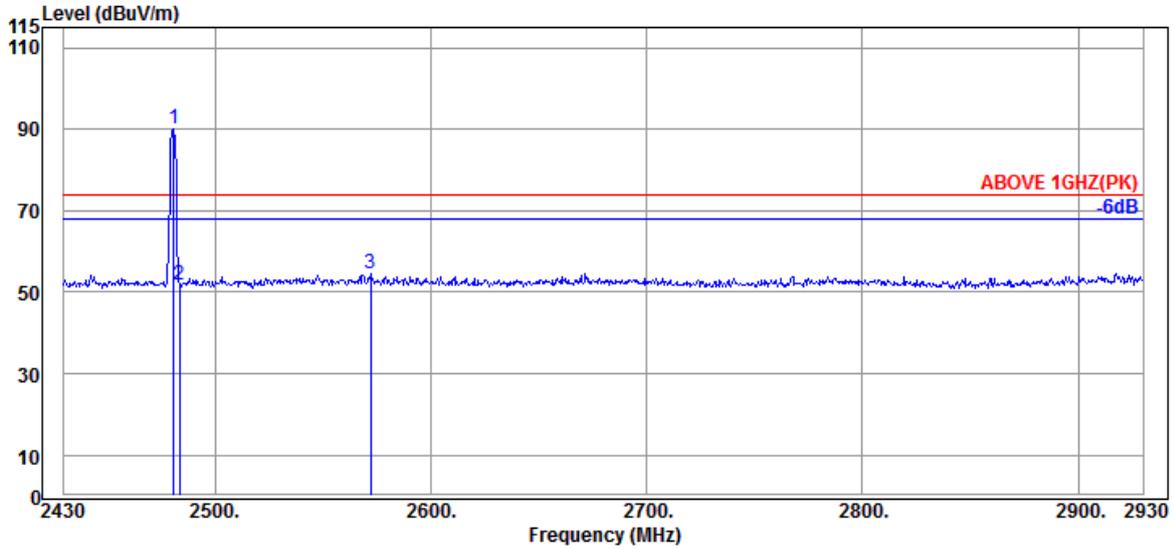

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	84.18	89.92	---	---	Peak
2483.500	32.30	7.99	34.55	46.13	51.87	74.00	22.13	Peak
2572.000	32.50	8.04	34.58	48.48	54.44	74.00	19.56	Peak

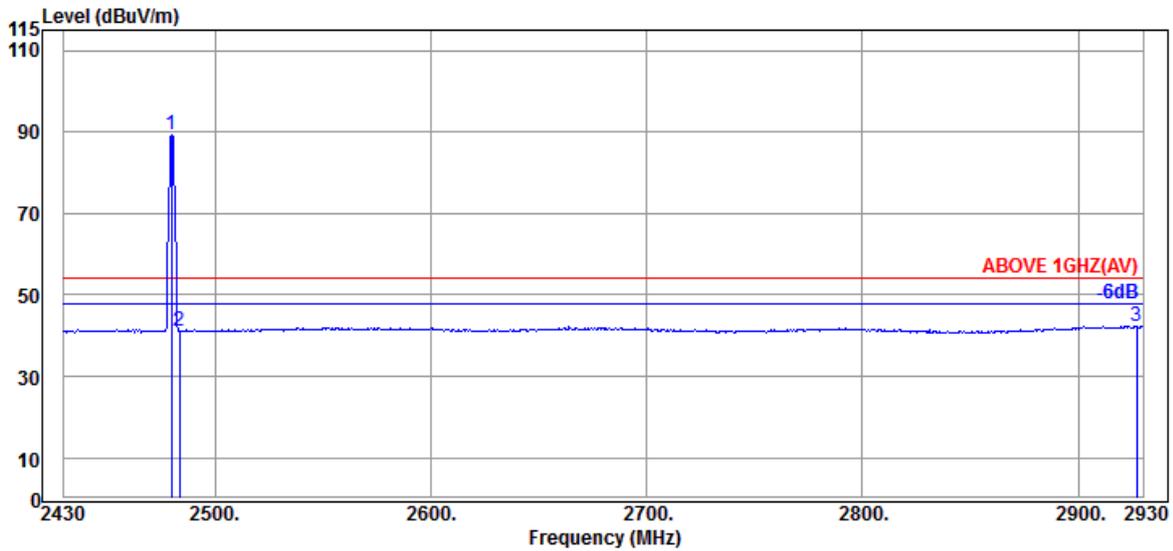

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	83.70	89.44	---	---	Average
2483.500	32.30	7.99	34.55	35.31	41.05	54.00	12.95	Average
2927.000	32.97	8.19	34.65	35.91	42.42	54.00	11.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.45	41.44	54.00	12.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.65	41.64	54.00	12.36	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.16	42.15	54.00	11.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.94	41.93	54.00	12.07	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.72	41.71	54.00	12.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.34	41.33	54.00	12.67	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.21	42.20	54.00	11.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.76	41.75	54.00	12.25	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.61	41.60	54.00	12.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.43	41.42	54.00	12.58	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	33.37	43.36	54.00	10.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.10	41.09	54.00	12.91	Peak

Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	33.19	42.84	54.00	11.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.85	42.50	54.00	11.50	Peak

Mode	BLE(2M)	Frequency	TX 2440MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	32.38	42.34	54.00	11.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	33.80	43.76	54.00	10.24	Peak

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	32.37	42.39	54.00	11.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	31.76	41.78	54.00	12.22	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.