


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	154
A.2.3 Emissions in Non-restricted Frequency Bands.....	169
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	170
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	170
A.3.2 Measurement Plots	180
A.4 POWER SPECTRAL DENSITY	239
A.4.1 Power Spectral Density Result	239
A.4.2 Measurement Plots	248
A.5 FREQUENCY STABILITY	290
A.5.1 Frequency stability Result	290

A.1 CONDUCTED EMISSION

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

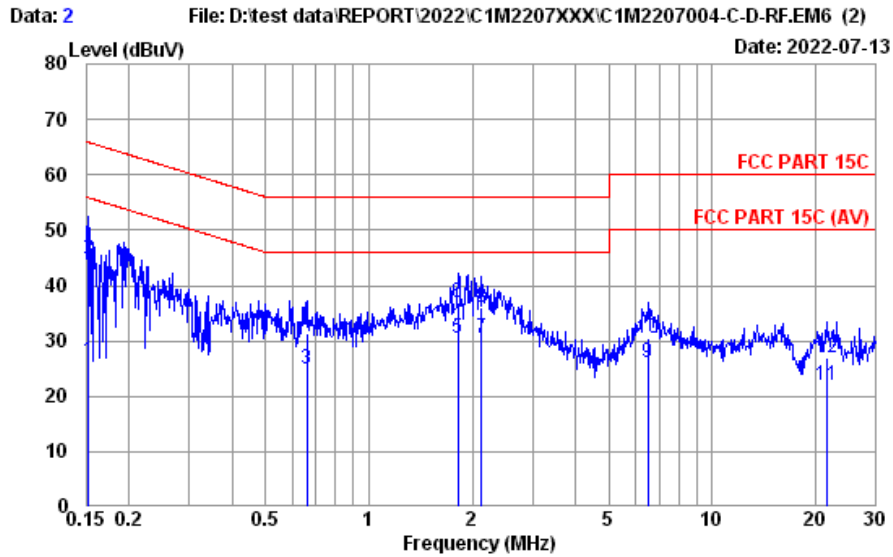


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 17ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.34	0.03	9.85	6.07	26.29	55.87	29.58	Average
2	0.152	10.34	0.03	9.85	24.57	44.79	65.87	21.08	QP
3	0.661	10.33	0.04	9.85	4.81	25.03	46.00	20.97	Average
4	0.661	10.33	0.04	9.85	11.08	31.30	56.00	24.70	QP
5	1.819	10.36	0.06	9.86	10.24	30.52	46.00	15.48	Average
6	1.819	10.36	0.06	9.86	16.55	36.83	56.00	19.17	QP
7	2.133	10.36	0.06	9.86	10.10	30.38	46.00	15.62	Average
8	2.133	10.36	0.06	9.86	15.76	36.04	56.00	19.96	QP
9	6.488	10.52	0.11	9.87	5.60	26.10	50.00	23.90	Average
10	6.488	10.52	0.11	9.87	10.01	30.51	60.00	29.49	QP
11	21.486	11.11	0.20	9.95	0.81	22.07	50.00	27.93	Average
12	21.486	11.11	0.20	9.95	5.62	26.88	60.00	33.12	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

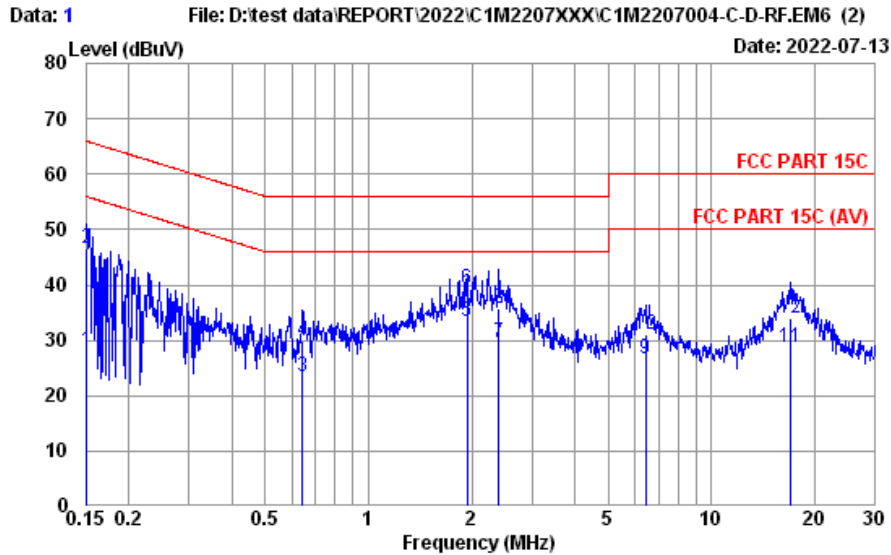

Site No. : No.8 Shielded Room Data No. : 1
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : FCC PART 15C Phase : LIIE
 Environment : 26°C / 47% Engineer : Roy Hung
 EUT Model : 17ZB90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.22	0.03	9.85	7.89	27.99	55.96	27.97	Average
2	0.151	10.22	0.03	9.85	26.57	46.67	65.96	19.29	QP
3	0.641	10.23	0.04	9.85	3.46	23.58	46.00	22.42	Average
4	0.641	10.23	0.04	9.85	9.74	29.86	56.00	26.14	QP
5	1.939	10.25	0.06	9.86	13.11	33.28	46.00	12.72	Average
6	1.939	10.25	0.06	9.86	19.22	39.39	56.00	16.61	QP
7	2.396	10.26	0.07	9.86	9.29	29.48	46.00	16.52	Average
8	2.396	10.26	0.07	9.86	15.66	35.85	56.00	20.15	QP
9	6.420	10.35	0.11	9.87	6.21	26.54	50.00	23.46	Average
10	6.420	10.35	0.11	9.87	10.61	30.94	60.00	29.06	QP
11	16.928	10.59	0.18	9.92	8.09	28.78	50.00	21.22	Average
12	16.928	10.59	0.18	9.92	13.24	33.93	60.00	26.07	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/07/12 ~ 13	Temp./Hum.	23 ~ 24°C/59 ~ 60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.77	1.53	26.48	29.38	26.20	40.00	13.80	Peak
218.180	16.31	3.92	25.75	42.06	36.54	46.00	9.46	Peak
434.490	22.02	6.23	26.68	39.93	41.50	46.00	4.50	Peak
540.220	23.61	6.90	27.24	31.89	35.16	46.00	10.84	Peak
789.510	25.85	8.15	27.29	31.97	38.68	46.00	7.32	Peak
874.870	26.22	8.63	27.06	31.10	38.89	46.00	7.11	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	39.94	37.46	40.00	2.54	Peak
193.930	15.06	3.64	25.81	42.78	35.67	43.50	7.83	Peak
394.720	21.29	5.87	26.39	33.68	34.45	46.00	11.55	Peak
760.410	25.51	7.99	27.34	28.96	35.12	46.00	10.88	Peak
838.980	26.09	8.43	27.15	28.38	35.75	46.00	10.25	Peak
981.570	26.99	9.20	26.72	29.03	38.50	54.00	15.50	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

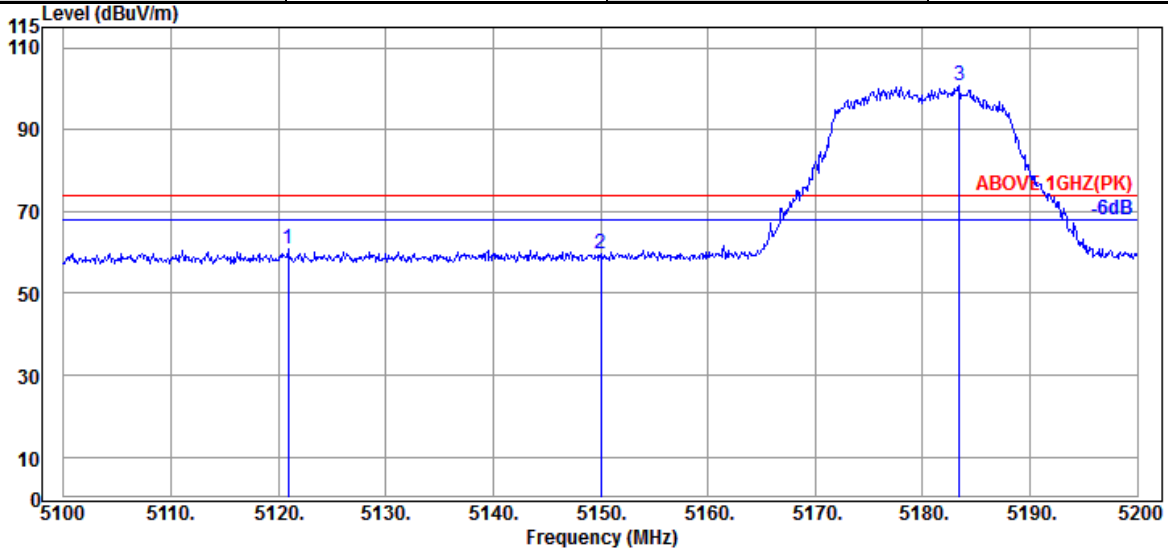

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.900	33.70	8.87	39.29	57.40	60.68	74.00	13.32	Peak
5150.000	33.70	8.88	39.29	56.20	59.49	74.00	14.51	Peak
@ 5183.400	33.70	8.90	39.28	97.39	100.71	---	---	Peak

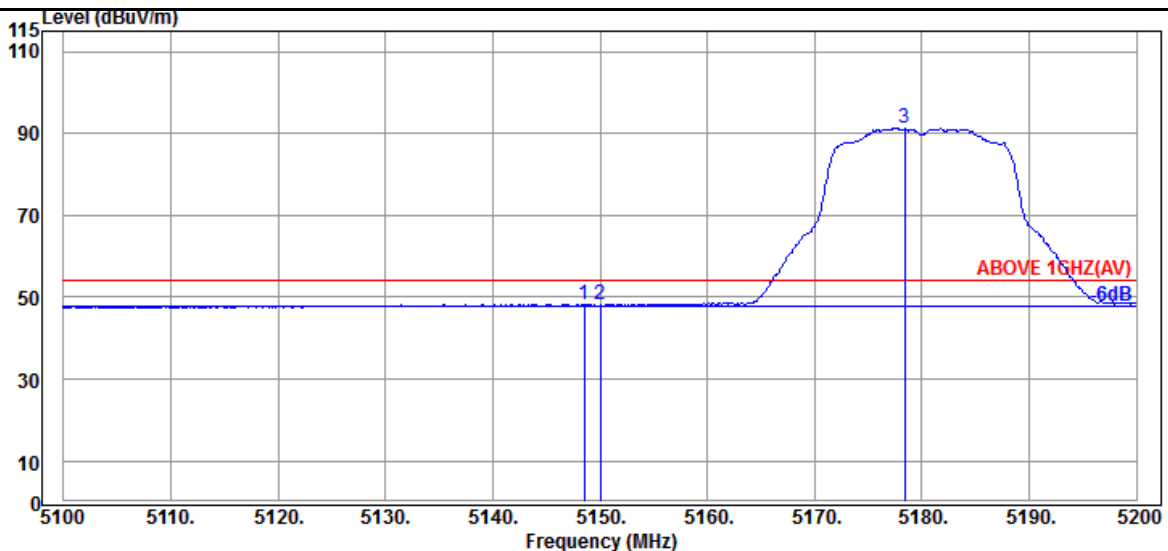


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.88	39.29	45.11	48.40	54.00	5.60	Average
5150.000	33.70	8.88	39.29	44.75	48.04	54.00	5.96	Average
@ 5178.400	33.70	8.90	39.28	87.90	91.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

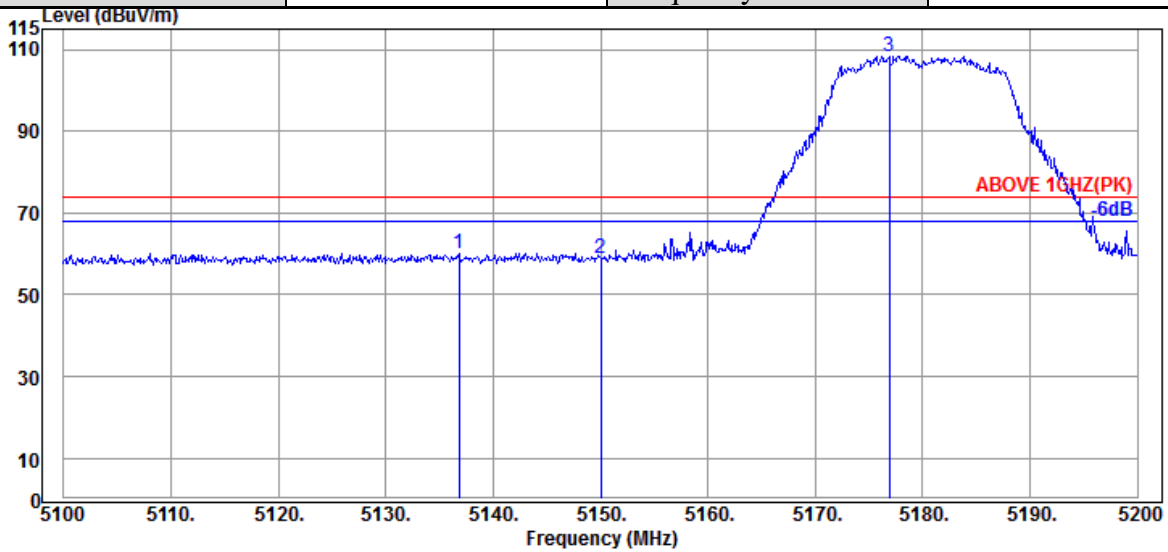

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.800	33.70	8.88	39.29	56.75	60.04	74.00	13.96	Peak
5150.000	33.70	8.88	39.29	55.62	58.91	74.00	15.09	Peak
@ 5176.900	33.70	8.90	39.28	104.96	108.28	---	---	Peak

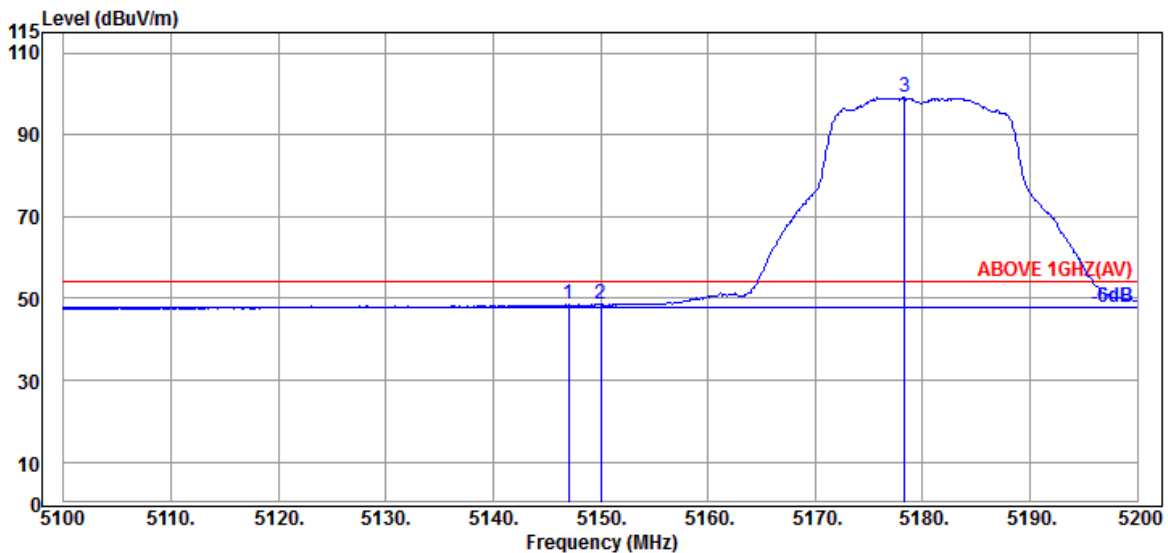


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.70	8.88	39.29	45.18	48.47	54.00	5.53	Average
5150.000	33.70	8.88	39.29	45.17	48.46	54.00	5.54	Average
@ 5178.300	33.70	8.90	39.28	95.90	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

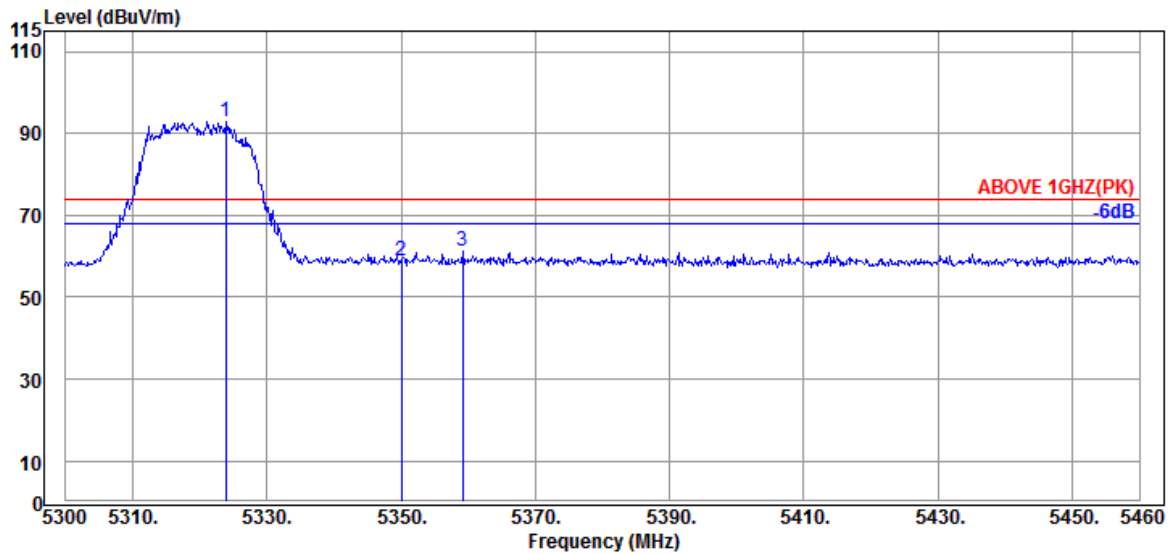

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	33.97	8.99	39.27	89.08	92.77	---	---	Peak
5350.080	33.90	8.99	39.27	55.39	59.01	74.00	14.99	Peak
5359.200	33.97	9.00	39.27	57.38	61.08	74.00	12.92	Peak

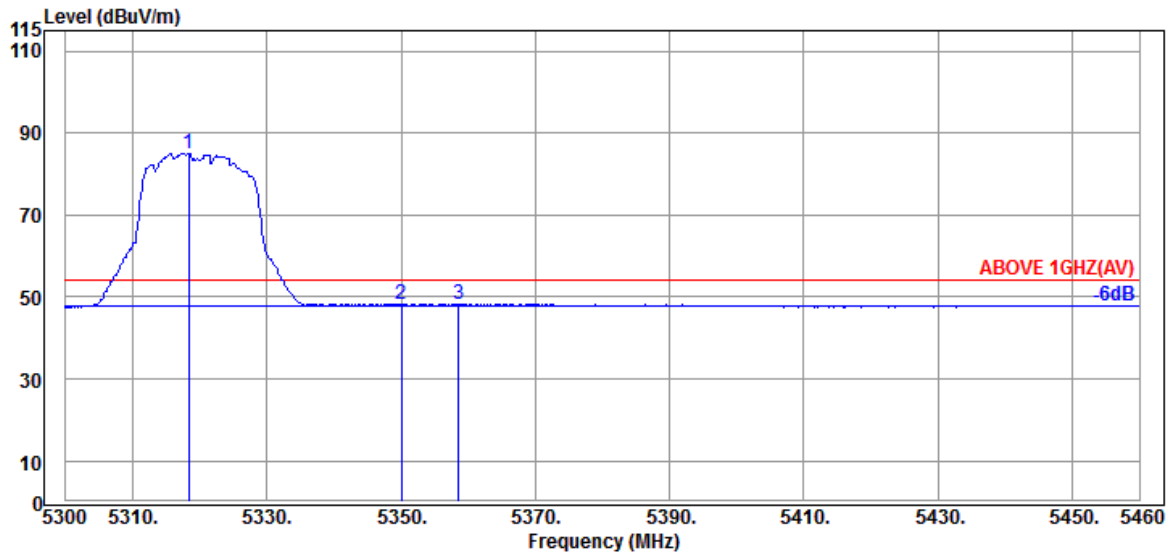


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.03	8.98	39.27	81.42	85.16	---	---	Average
5350.080	33.90	8.99	39.27	44.59	48.21	54.00	5.79	Average
5358.560	33.97	9.00	39.27	44.67	48.37	54.00	5.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

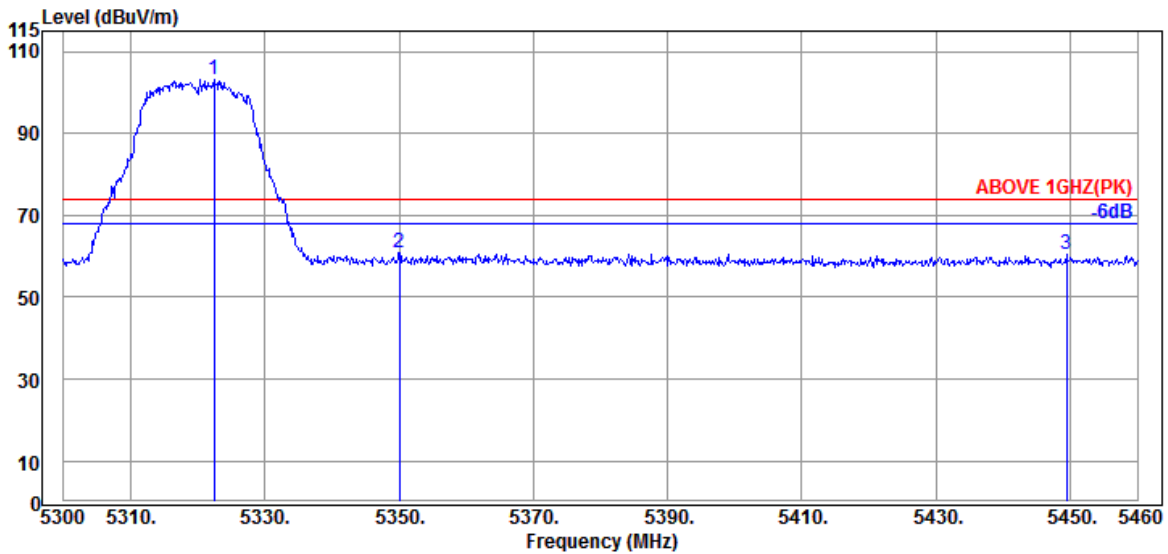

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.03	8.98	39.27	99.28	103.02	---	---	Peak
5350.080	33.90	8.99	39.27	57.12	60.74	74.00	13.26	Peak
5449.440	34.20	9.05	39.26	56.64	60.63	74.00	13.37	Peak

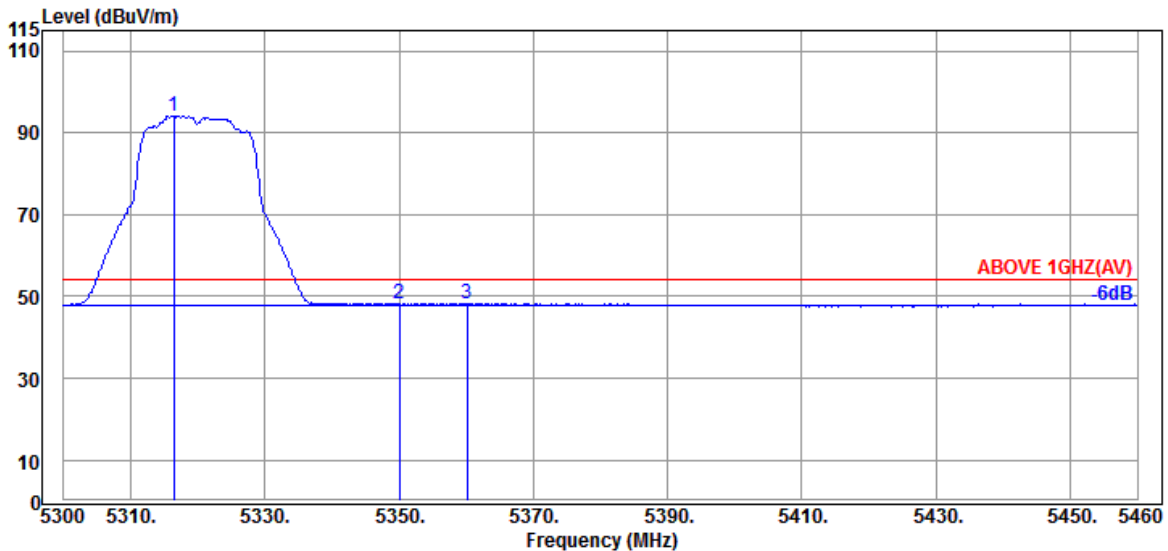


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.03	8.98	39.27	90.42	94.16	---	---	Average
5350.080	33.90	8.99	39.27	44.52	48.14	54.00	5.86	Average
5360.160	33.97	9.00	39.27	44.66	48.36	54.00	5.64	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

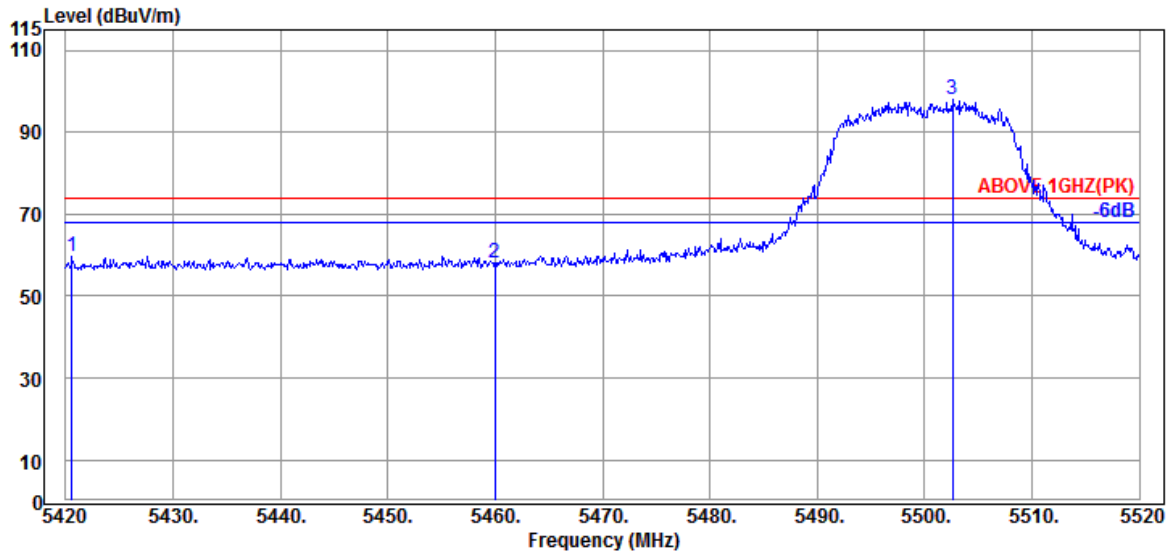

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.600	34.15	9.04	39.27	55.88	59.80	74.00	14.20	Peak
5460.000	34.20	9.05	39.26	53.98	57.97	74.00	16.03	Peak
@ 5502.600	34.10	9.08	39.26	94.14	98.06	---	---	Peak

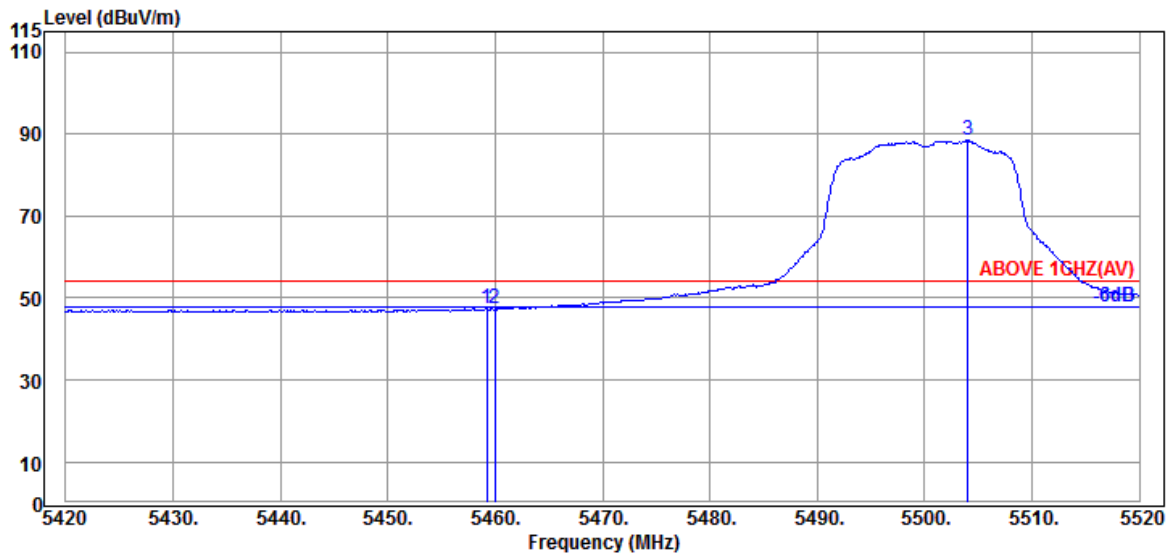


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.200	34.20	9.05	39.26	43.39	47.38	54.00	6.62	Average
5460.000	34.20	9.05	39.26	43.30	47.29	54.00	6.71	Average
@ 5504.000	34.10	9.08	39.26	84.58	88.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

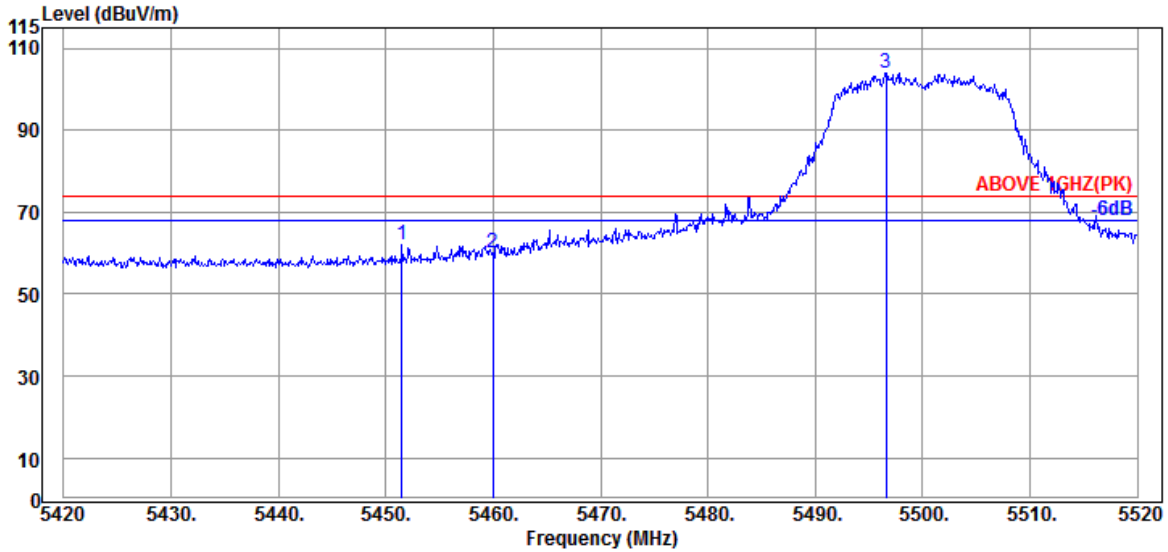

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.20	9.05	39.26	57.87	61.86	74.00	12.14	Peak
5460.000	34.20	9.05	39.26	56.07	60.06	74.00	13.94	Peak
@ 5496.600	34.10	9.08	39.26	100.01	103.93	---	---	Peak

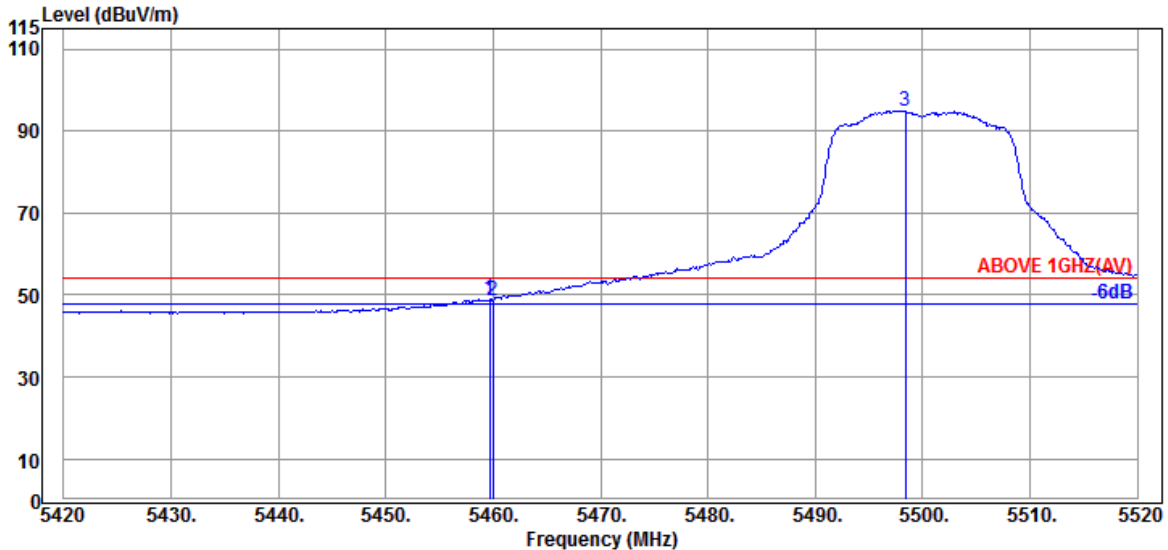


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.20	9.05	39.26	44.87	48.86	54.00	5.14	Average
5460.000	34.20	9.05	39.26	44.77	48.76	54.00	5.24	Average
@ 5498.400	34.10	9.08	39.26	90.93	94.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

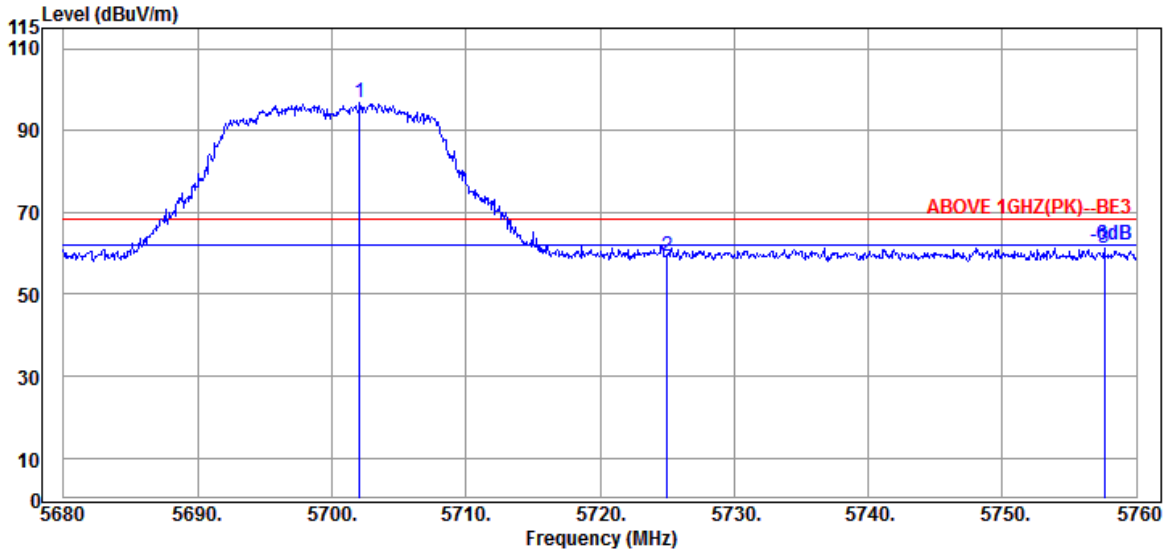

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.080	33.80	9.18	39.30	93.17	96.85	---	---	Peak
5725.040	33.80	9.20	39.30	55.57	59.27	68.20	8.93	Peak
5757.600	33.87	9.21	39.31	57.66	61.43	68.20	6.77	Peak

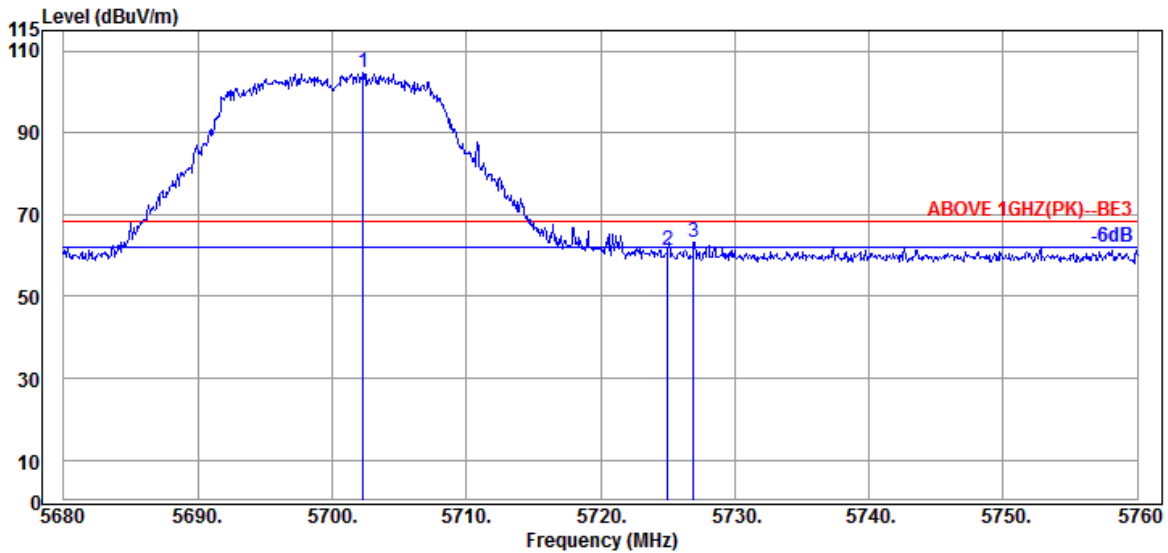


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.320	33.80	9.18	39.30	100.87	104.55	---	---	Peak
5725.040	33.80	9.20	39.30	57.74	61.44	68.20	6.76	Peak
5726.960	33.80	9.20	39.31	59.43	63.12	68.20	5.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

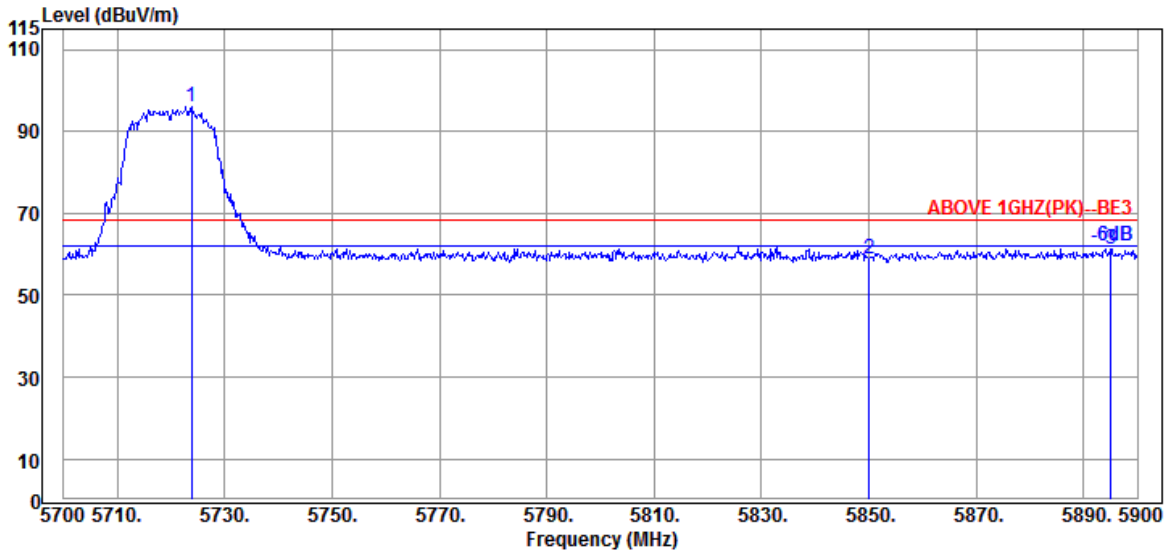

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	33.80	9.20	39.30	92.43	96.13	---	---	Peak
5850.000	34.10	9.25	39.33	54.90	58.92	68.20	9.28	Peak
5895.000	34.10	9.28	39.34	57.37	61.41	68.20	6.79	Peak

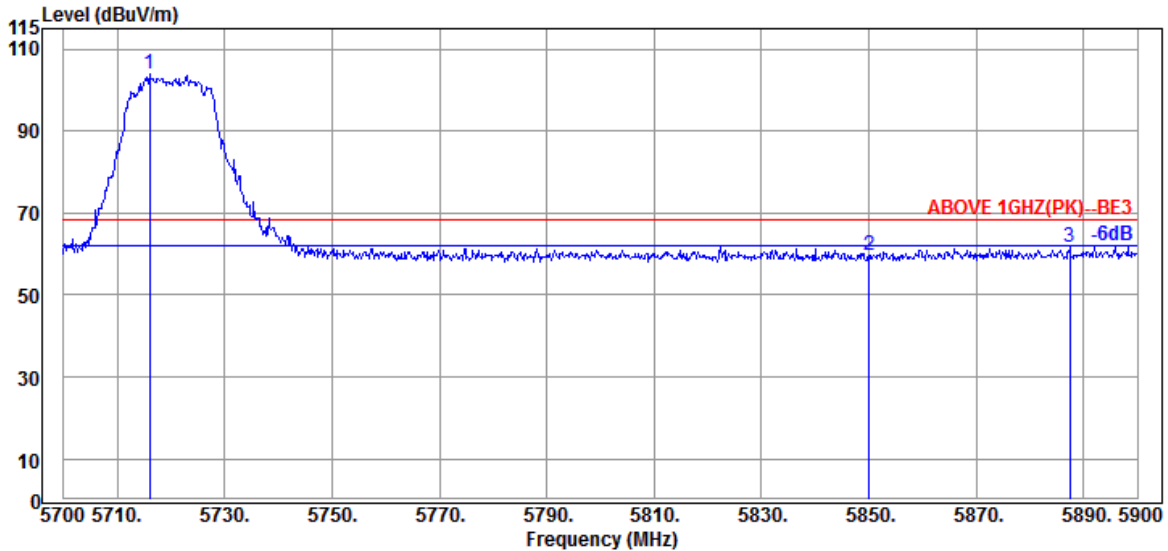


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.000	33.80	9.19	39.30	100.39	104.08	---	---	Peak
5850.000	34.10	9.25	39.33	55.62	59.64	68.20	8.56	Peak
5887.400	34.10	9.27	39.34	57.57	61.60	68.20	6.60	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

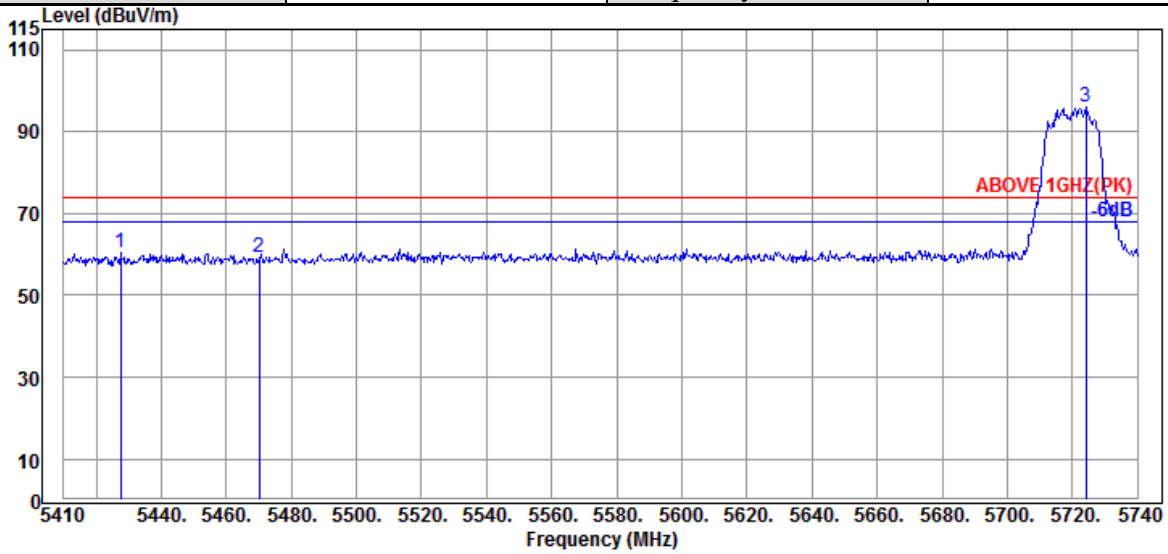

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.490	34.15	9.04	39.27	56.47	60.39	74.00	13.61	Peak
5470.060	34.17	9.06	39.26	55.31	59.28	74.00	14.72	Peak
@ 5724.160	33.80	9.20	39.30	92.26	95.96	---	---	Peak

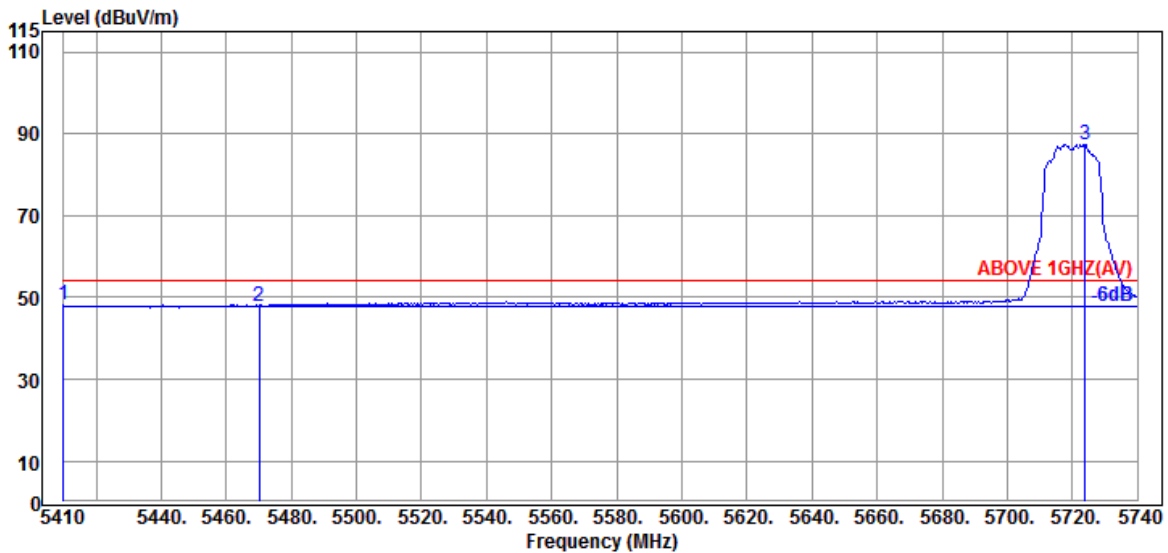


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.000	34.12	9.03	39.27	44.39	48.27	54.00	5.73	Average
5470.060	34.17	9.06	39.26	43.88	47.85	54.00	6.15	Average
@ 5723.830	33.80	9.20	39.30	83.64	87.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

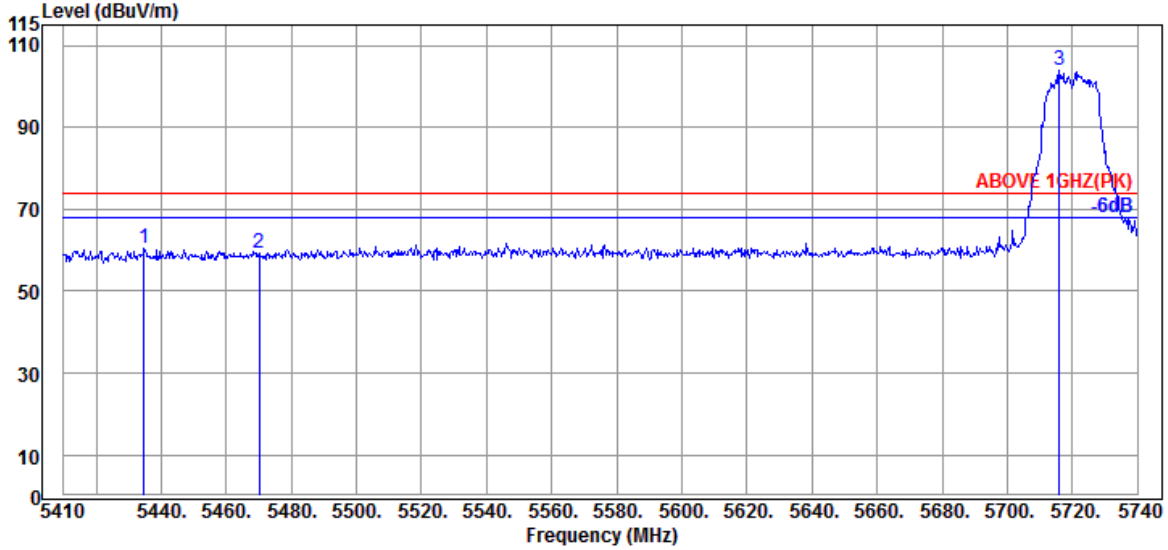

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5434.750	34.17	9.04	39.26	56.69	60.64	74.00	13.36	Peak
5470.060	34.17	9.06	39.26	55.39	59.36	74.00	14.64	Peak
@ 5715.910	33.80	9.19	39.30	100.12	103.81	---	---	Peak

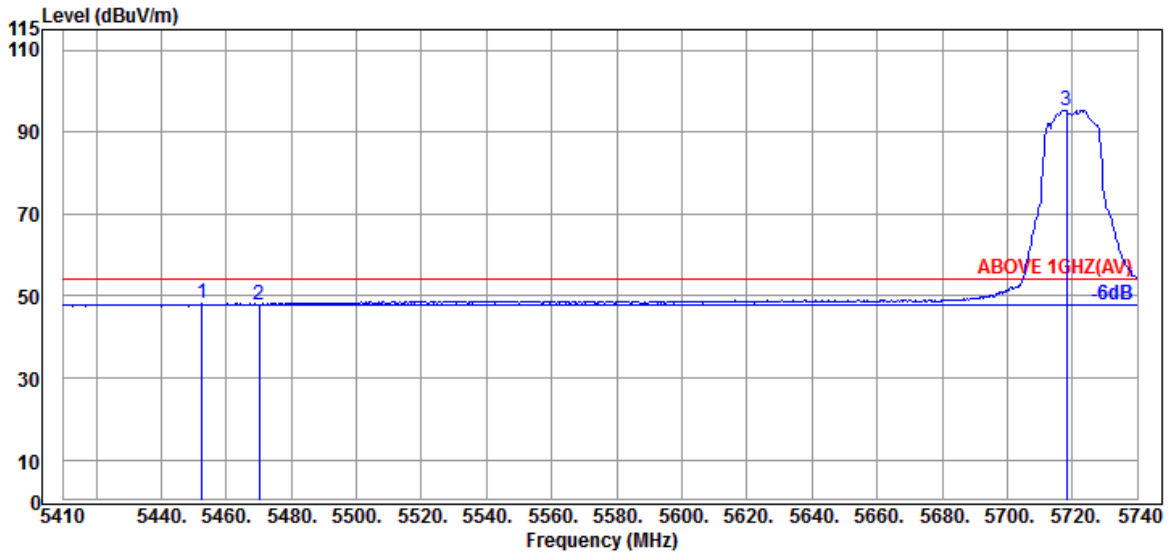


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5452.570	34.20	9.05	39.26	44.16	48.15	54.00	5.85	Average
5470.060	34.17	9.06	39.26	43.95	47.92	54.00	6.08	Average
@ 5718.220	33.80	9.19	39.30	91.64	95.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

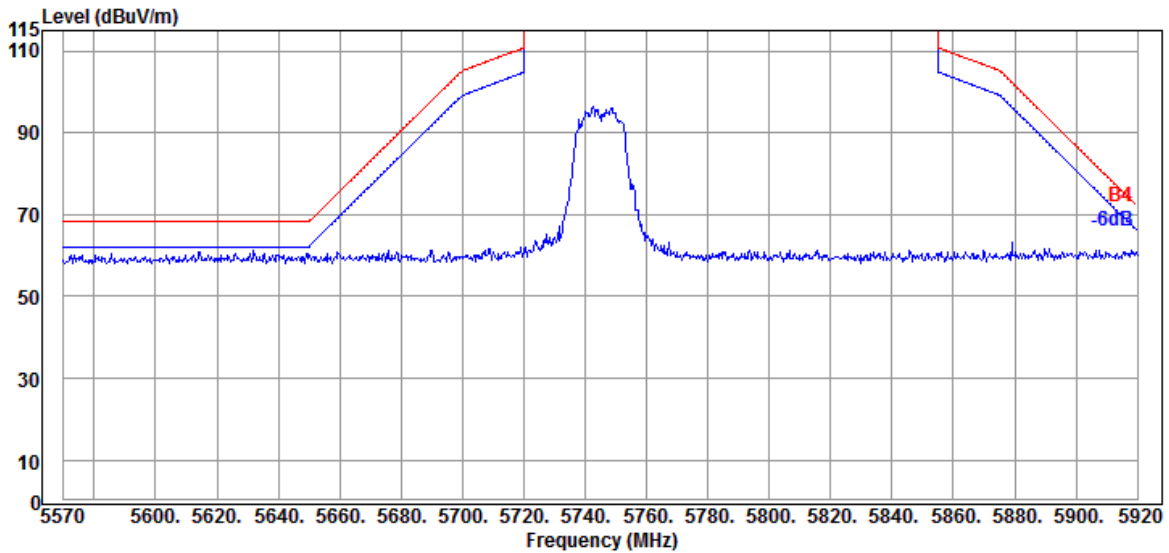


Antenna at Vertical Polarization

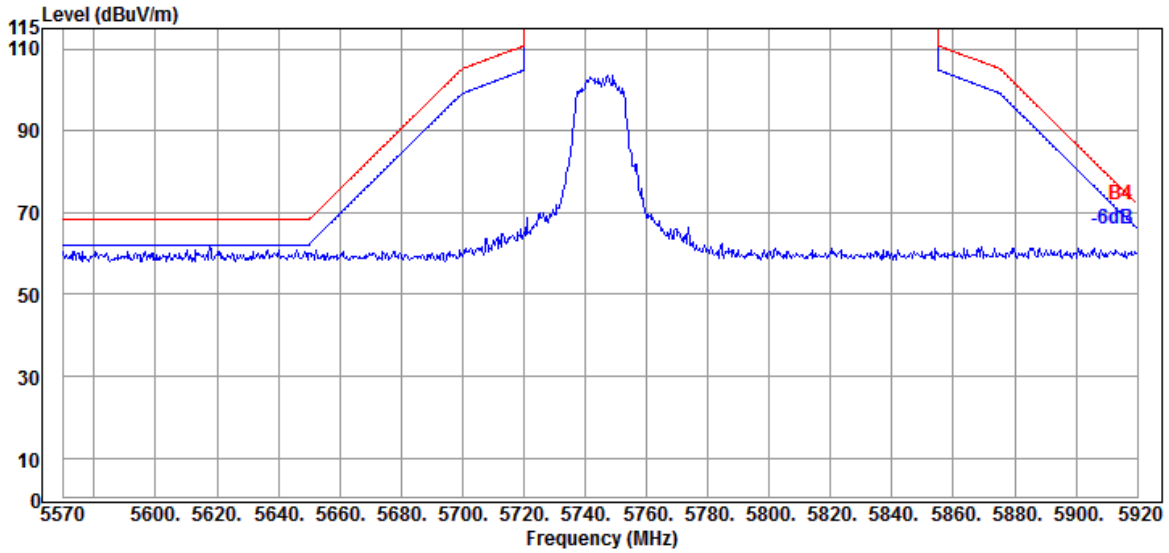


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

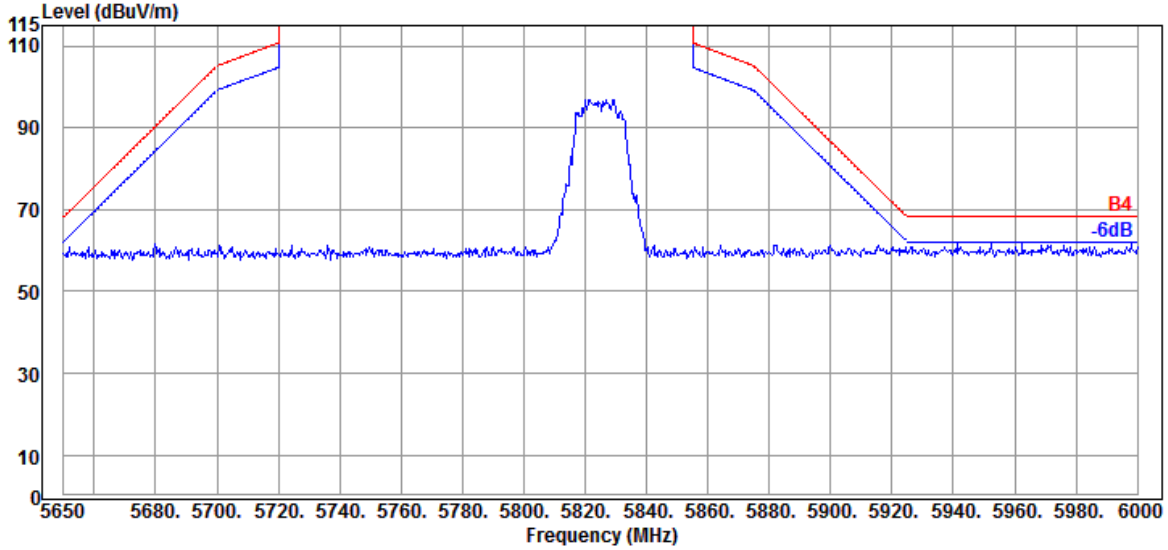

Antenna at Vertical Polarization

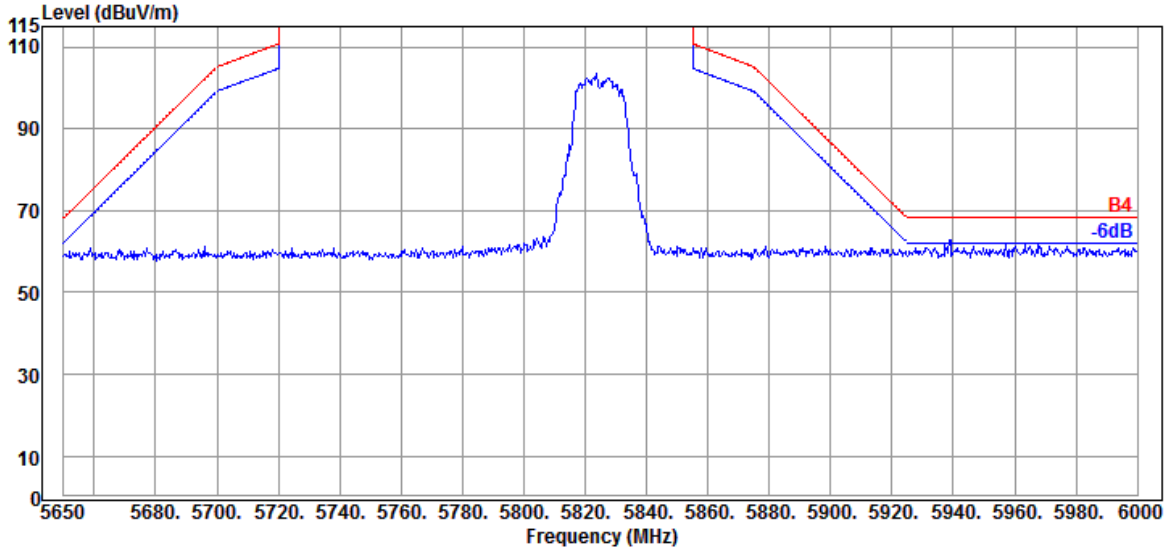


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

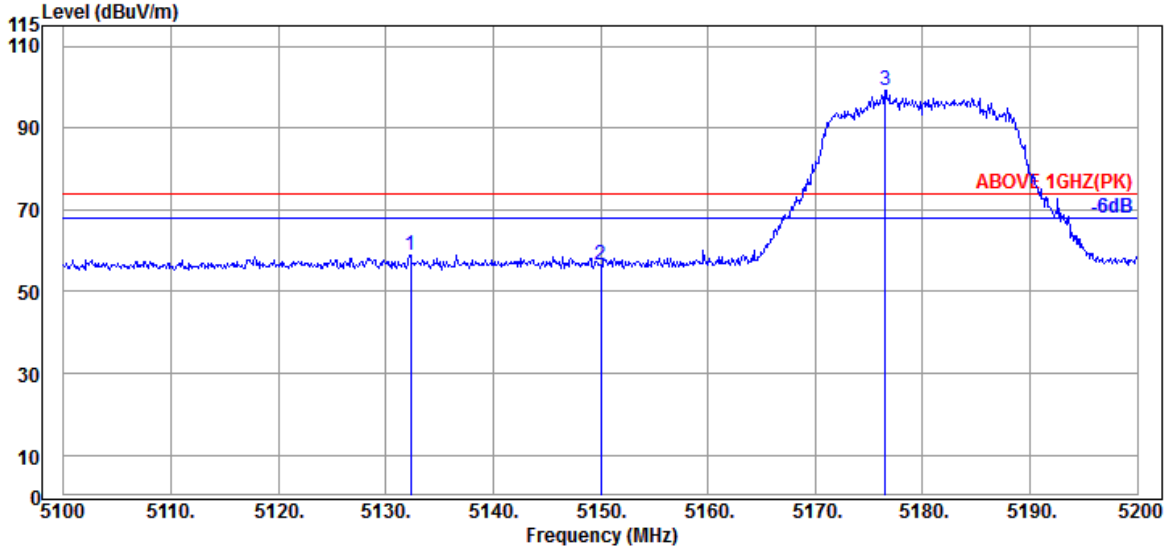

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.300	33.70	8.88	39.29	55.71	59.00	74.00	15.00	Peak
5150.000	33.70	8.88	39.29	53.41	56.70	74.00	17.30	Peak
@ 5176.500	33.70	8.90	39.28	95.98	99.30	---	---	Peak

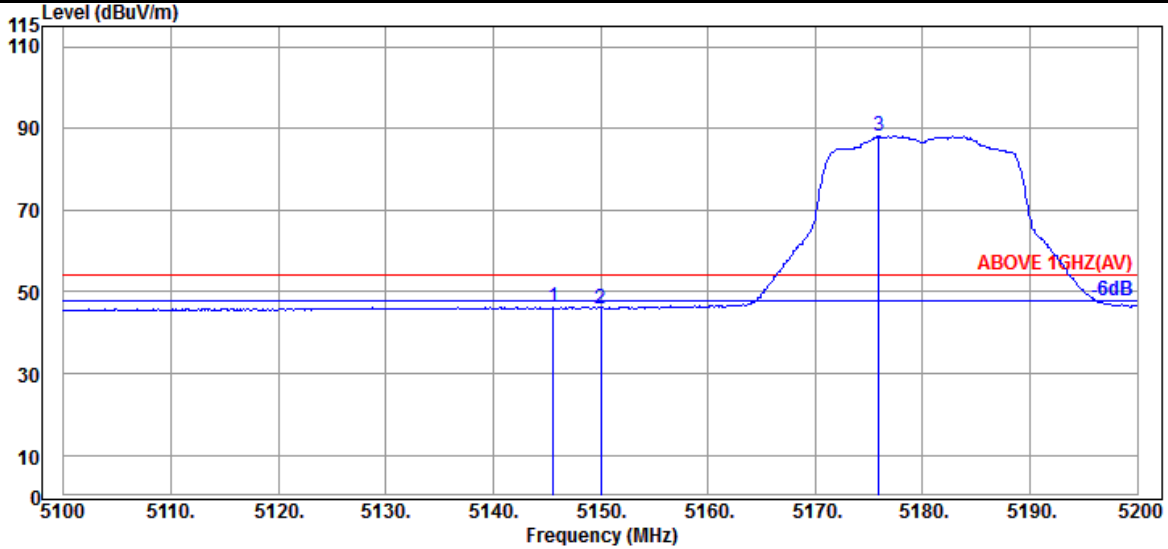


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.70	8.88	39.29	42.93	46.22	54.00	7.78	Average
5150.000	33.70	8.88	39.29	42.70	45.99	54.00	8.01	Average
@ 5175.900	33.70	8.90	39.28	84.82	88.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

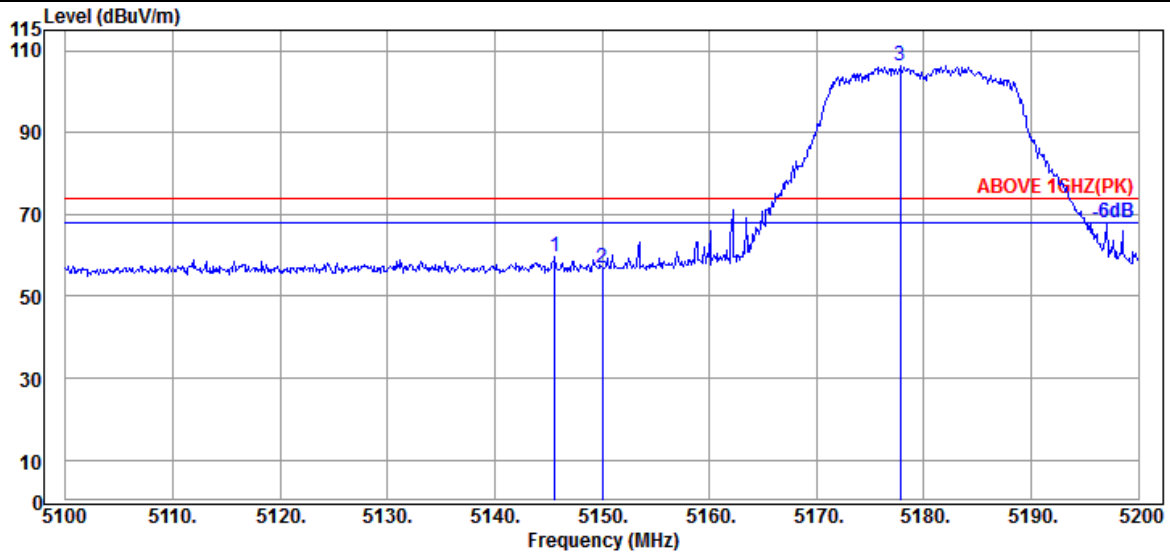

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.70	8.88	39.29	56.27	59.56	74.00	14.44	Peak
5150.000	33.70	8.88	39.29	53.42	56.71	74.00	17.29	Peak
@ 5177.800	33.70	8.90	39.28	102.85	106.17	---	---	Peak

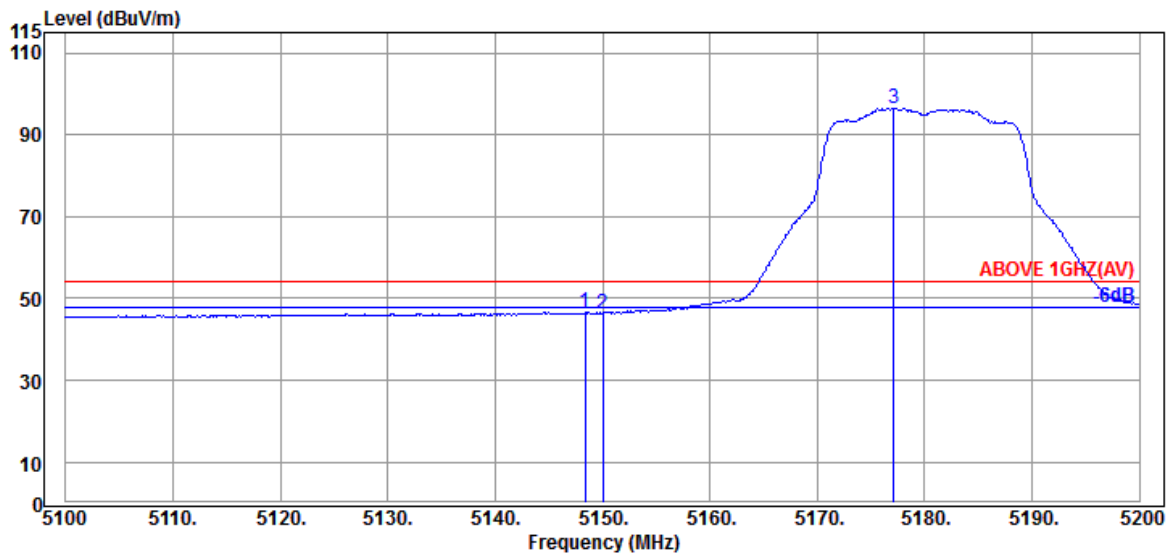


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.70	8.88	39.29	43.27	46.56	54.00	7.44	Average
5150.000	33.70	8.88	39.29	43.06	46.35	54.00	7.65	Average
@ 5177.100	33.70	8.90	39.28	93.22	96.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

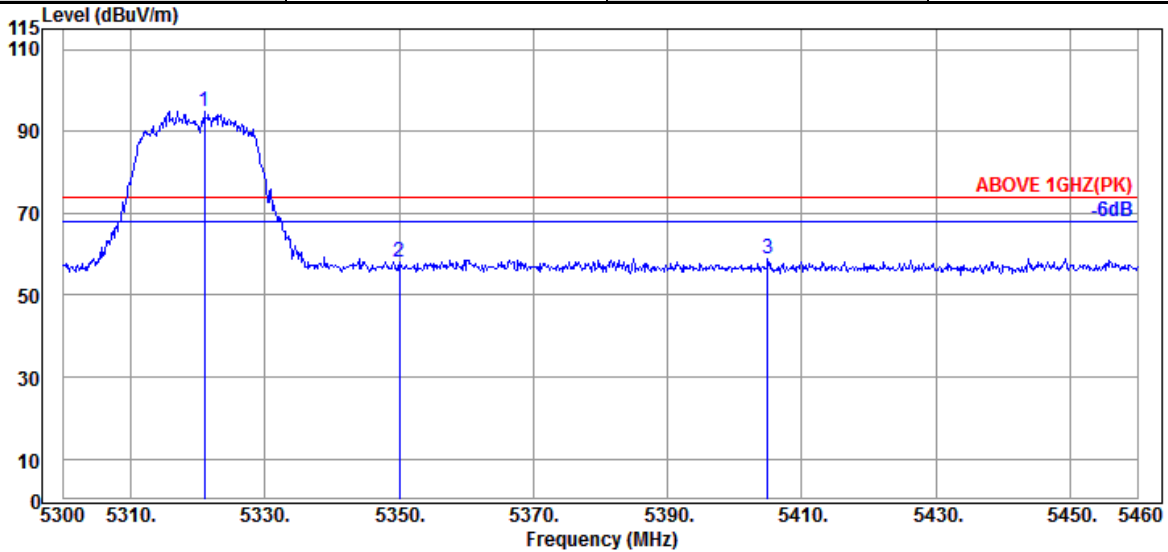

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.960	34.03	8.98	39.27	91.07	94.81	---	---	Peak
5350.080	33.90	8.99	39.27	54.34	57.96	74.00	16.04	Peak
5404.960	34.12	9.03	39.27	54.94	58.82	74.00	15.18	Peak

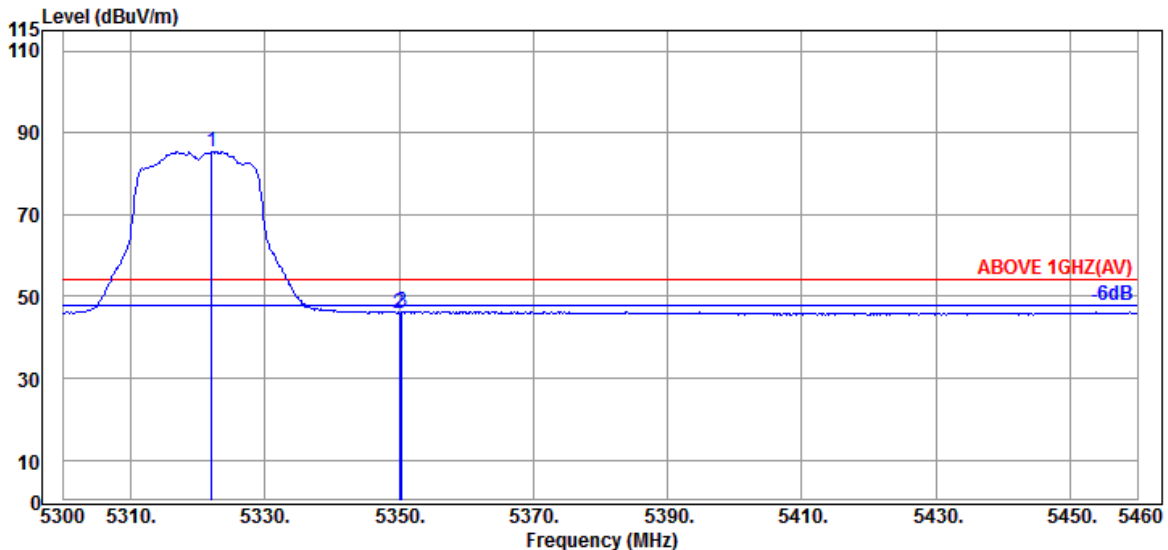


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	34.03	8.98	39.27	81.76	85.50	---	---	Average
5350.080	33.90	8.99	39.27	42.38	46.00	54.00	8.00	Average
5350.400	33.90	8.99	39.27	42.69	46.31	54.00	7.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

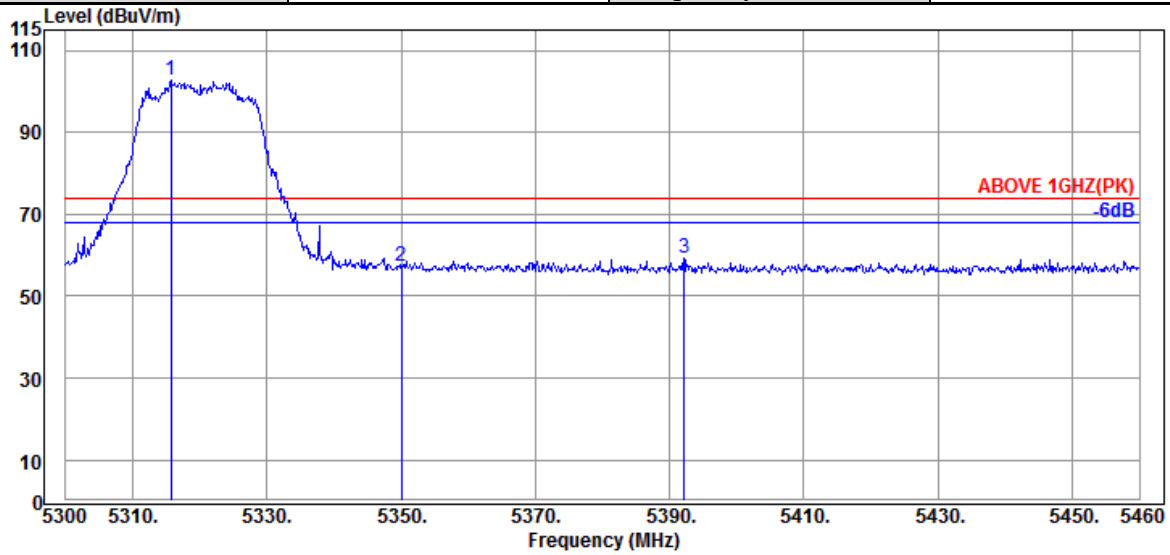

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.680	34.03	8.98	39.27	98.96	102.70	---	---	Peak
5350.080	33.90	8.99	39.27	53.87	57.49	74.00	16.51	Peak
5392.160	34.10	9.02	39.27	55.37	59.22	74.00	14.78	Peak

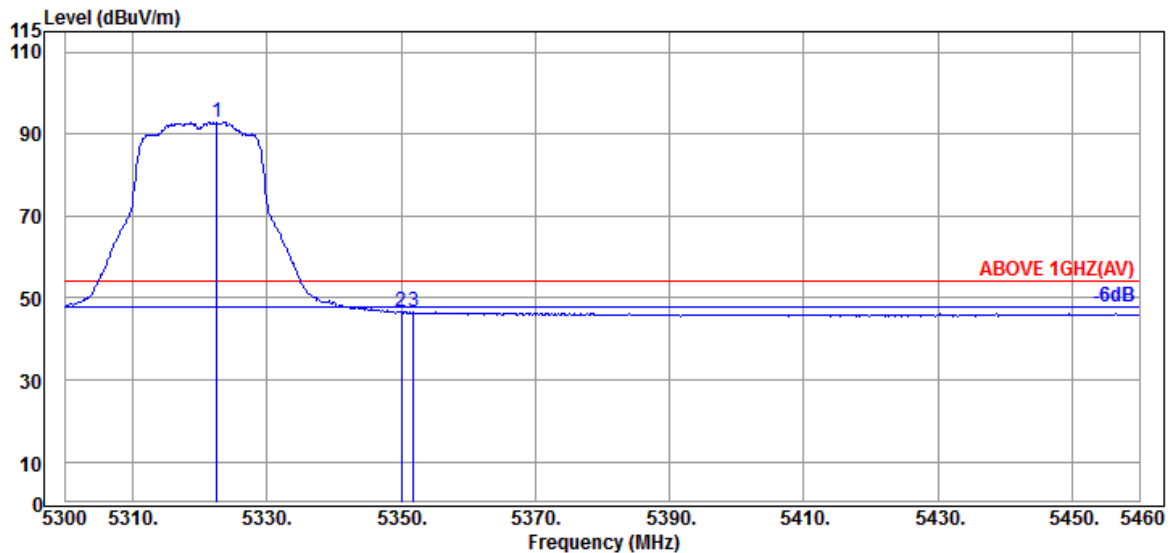


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.560	34.03	8.98	39.27	89.15	92.89	---	---	Average
5350.080	33.90	8.99	39.27	42.97	46.59	54.00	7.41	Average
5351.840	33.90	8.99	39.27	42.93	46.55	54.00	7.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

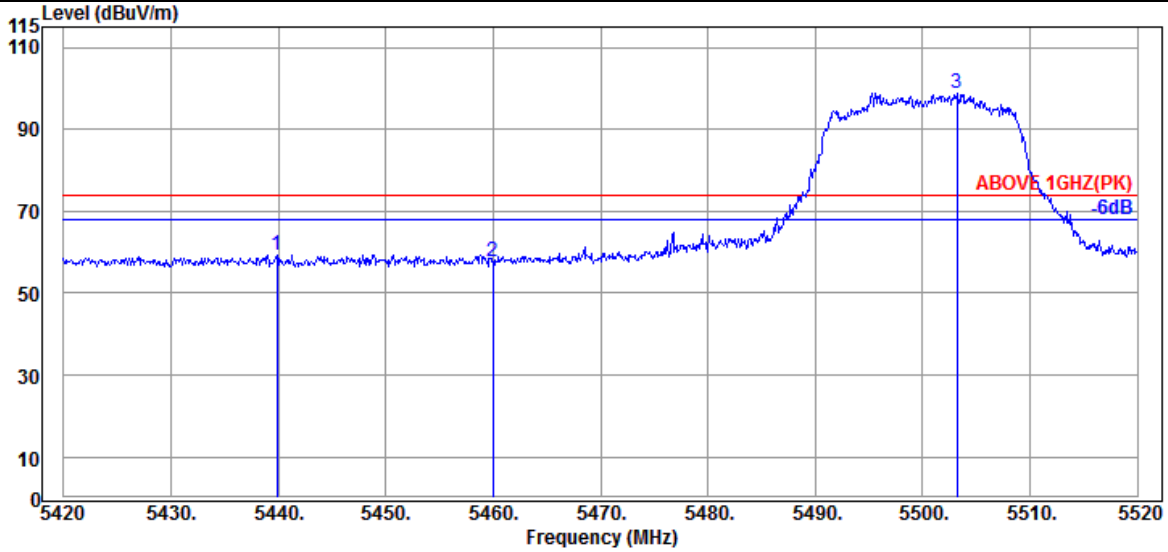

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.900	34.17	9.04	39.26	55.47	59.42	74.00	14.58	Peak
5460.000	34.20	9.05	39.26	53.53	57.52	74.00	16.48	Peak
@ 5503.200	34.10	9.08	39.26	94.95	98.87	---	---	Peak

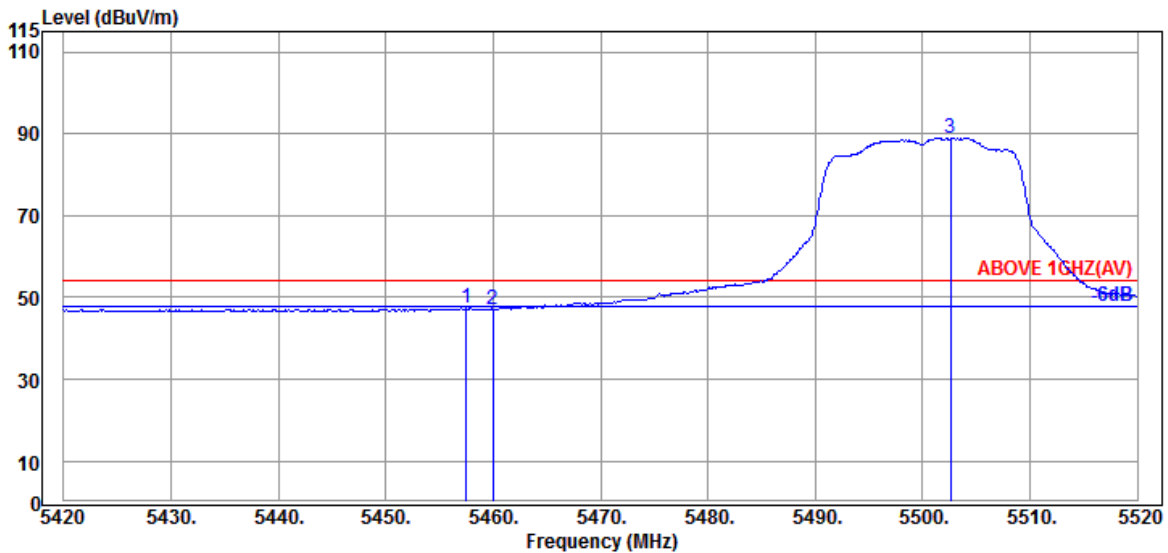


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.20	9.05	39.26	43.37	47.36	54.00	6.64	Average
5460.000	34.20	9.05	39.26	43.03	47.02	54.00	6.98	Average
@ 5502.600	34.10	9.08	39.26	85.03	88.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

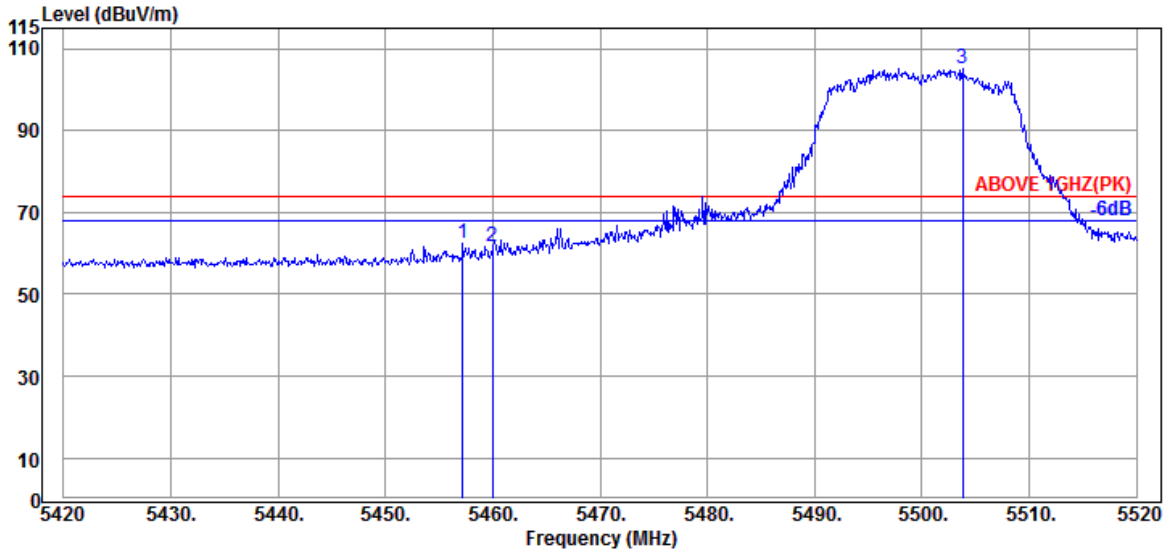

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.200	34.20	9.05	39.26	58.28	62.27	74.00	11.73	Peak
5460.000	34.20	9.05	39.26	57.85	61.84	74.00	12.16	Peak
@ 5503.800	34.10	9.08	39.26	101.22	105.14	---	---	Peak

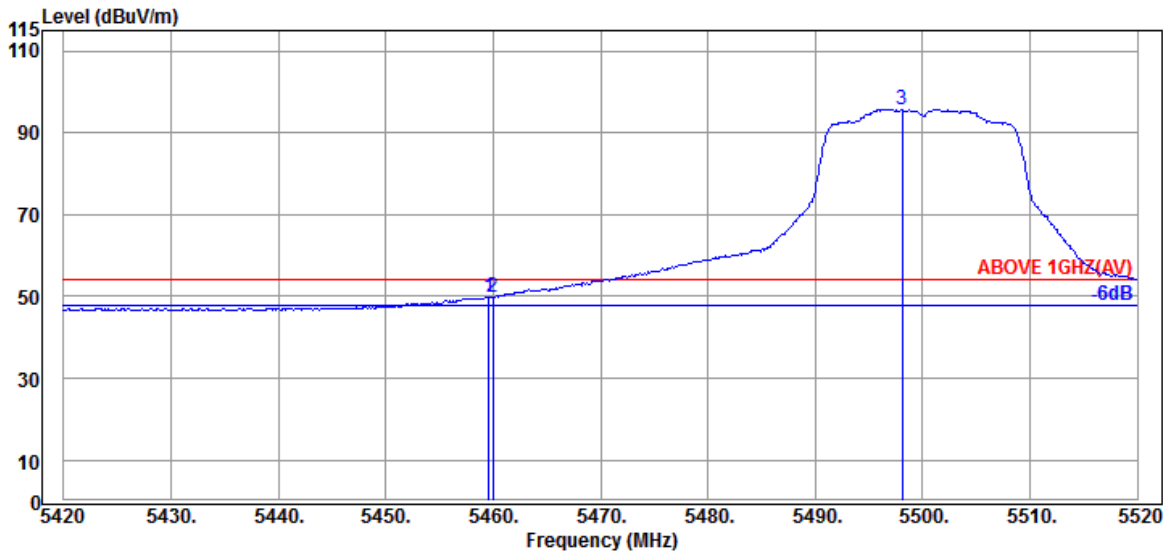


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	46.00	49.99	54.00	4.01	Average
5460.000	34.20	9.05	39.26	45.75	49.74	54.00	4.26	Average
@ 5498.100	34.10	9.08	39.26	91.78	95.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

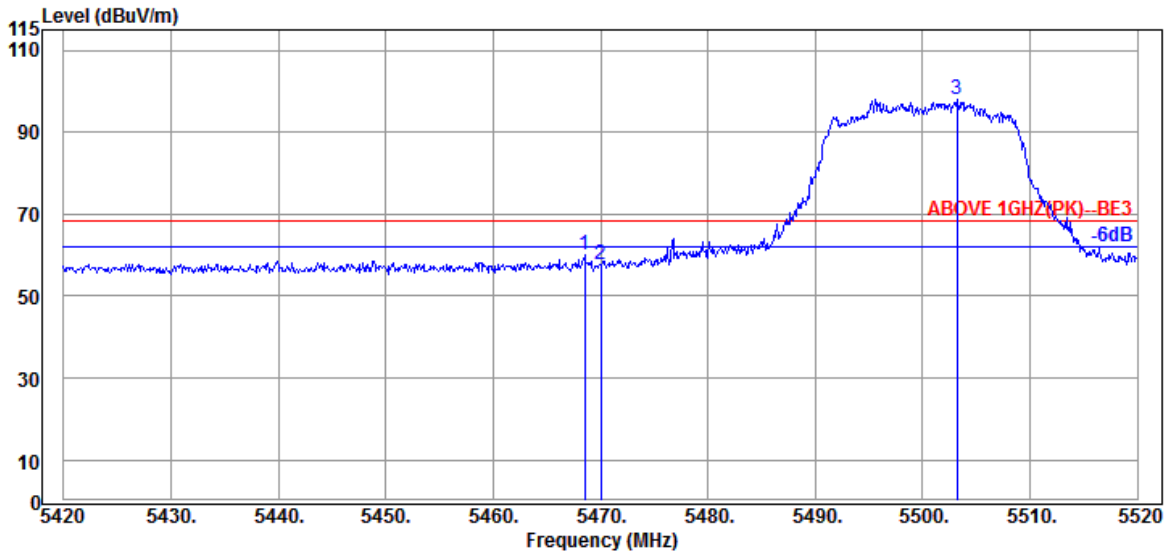

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.17	9.06	39.26	56.09	60.06	68.20	8.14	Peak
5470.000	34.17	9.06	39.26	53.84	57.81	68.20	10.39	Peak
@ 5503.200	34.10	9.08	39.26	93.95	97.87	---	---	Peak

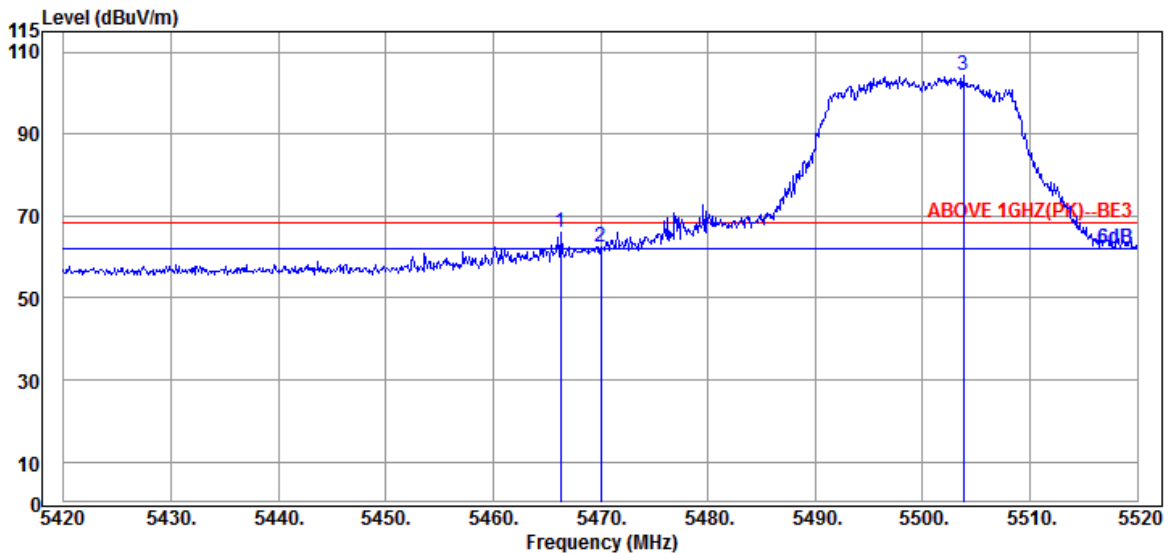


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.17	9.06	39.26	62.06	66.03	68.20	2.17	Peak
5470.000	34.17	9.06	39.26	58.35	62.32	68.20	5.88	Peak
@ 5503.800	34.10	9.08	39.26	100.22	104.14	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

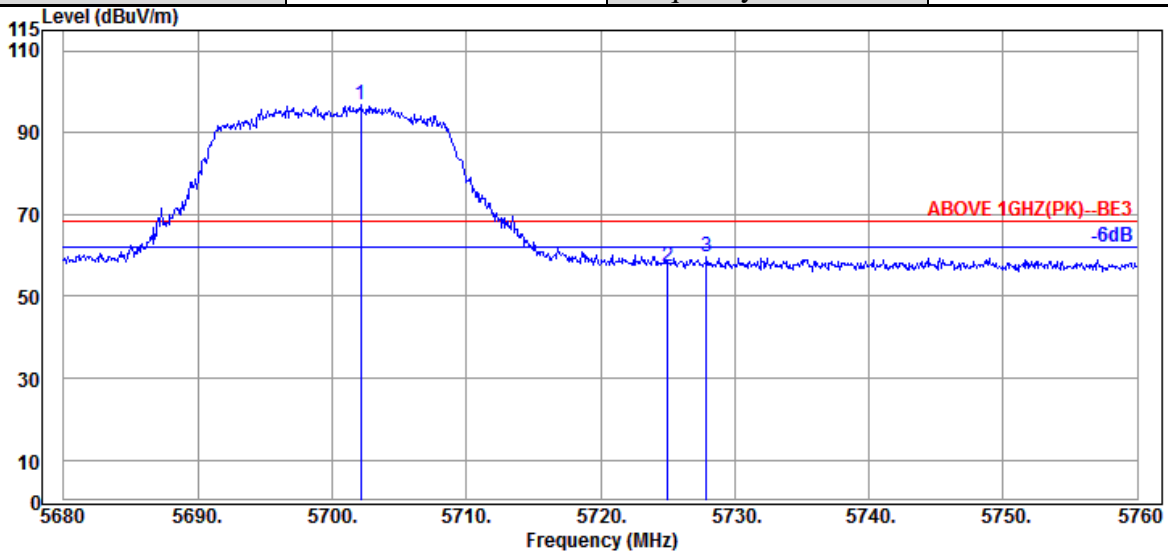

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.160	33.80	9.18	39.30	93.02	96.70	---	---	Peak
5725.040	33.80	9.20	39.30	53.69	57.39	68.20	10.81	Peak
5727.920	33.80	9.20	39.31	55.79	59.48	68.20	8.72	Peak

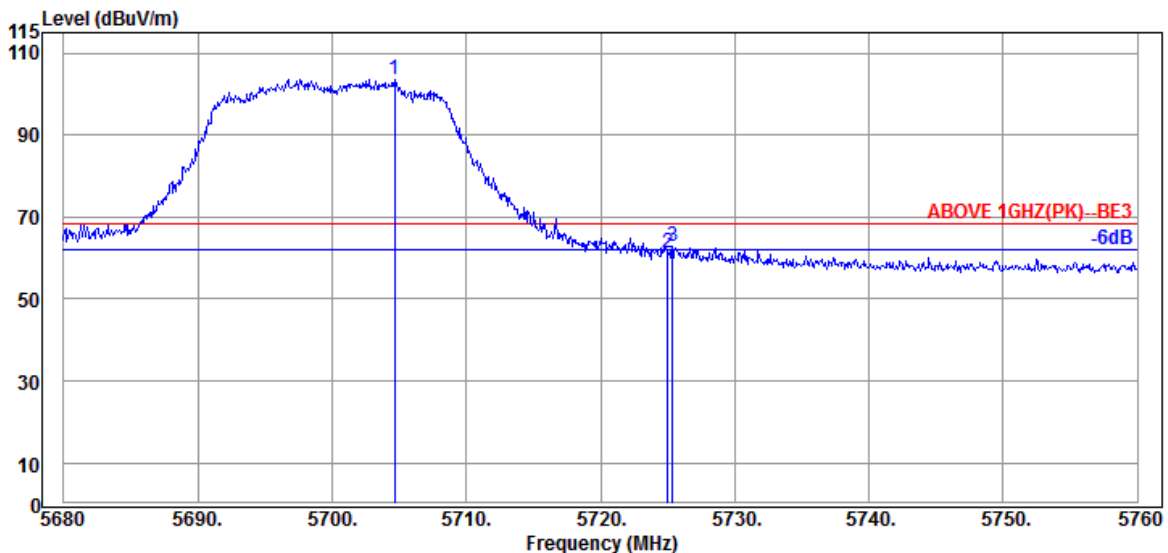


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.640	33.80	9.18	39.30	99.99	103.67	---	---	Peak
5725.040	33.80	9.20	39.30	57.48	61.18	68.20	7.02	Peak
5725.360	33.80	9.20	39.30	59.10	62.80	68.20	5.40	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

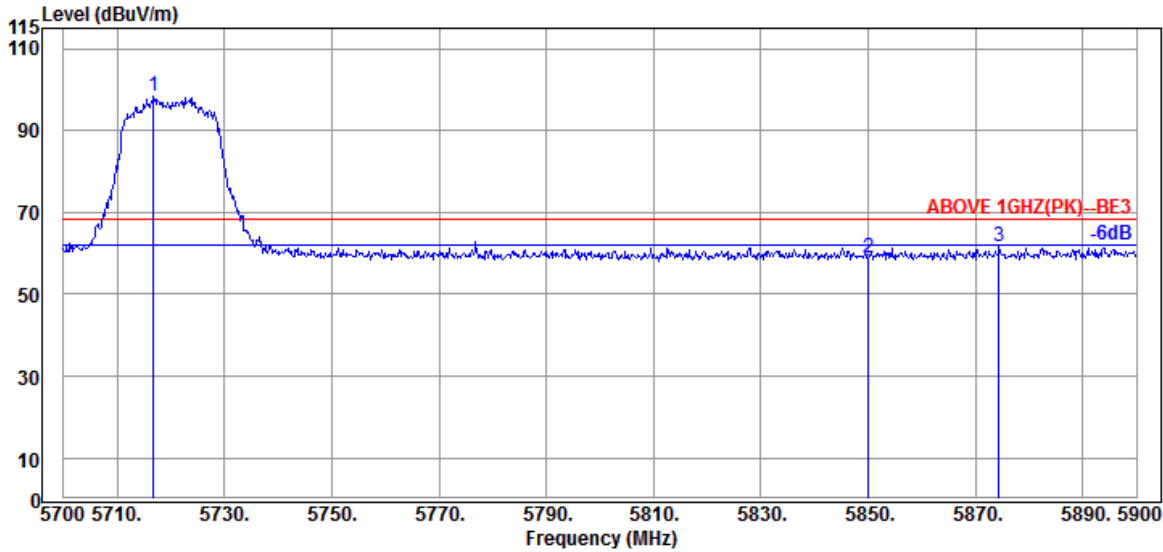

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5716.800	33.80	9.19	39.30	94.85	98.54	---	---	Peak
5850.000	34.10	9.25	39.33	54.81	58.83	68.20	9.37	Peak
5874.400	34.10	9.27	39.33	57.44	61.48	68.20	6.72	Peak

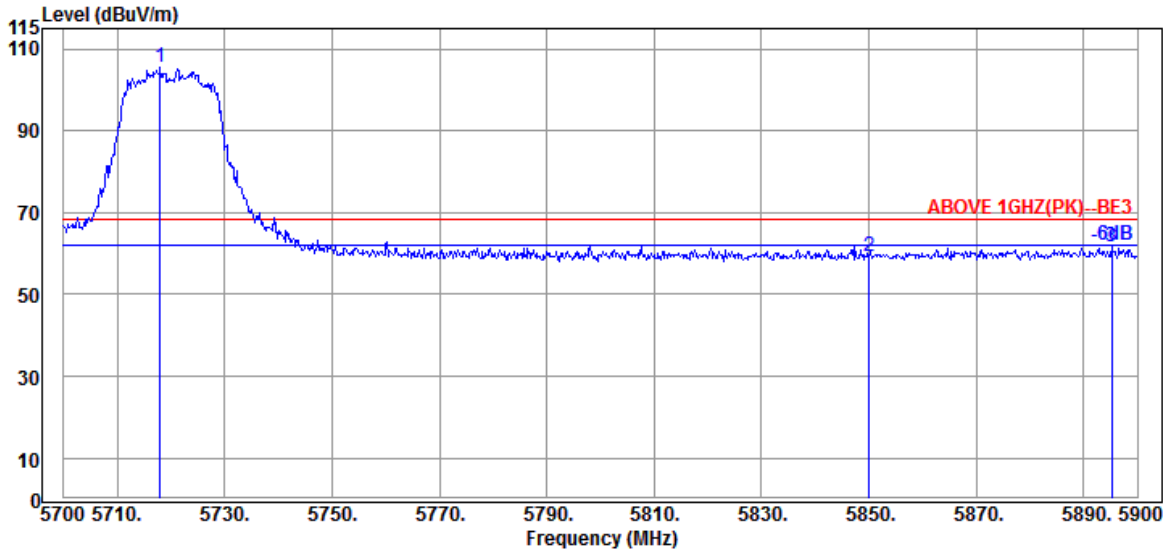


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5718.000	33.80	9.19	39.30	101.64	105.33	---	---	Peak
5850.000	34.10	9.25	39.33	55.39	59.41	68.20	8.79	Peak
5895.200	34.10	9.28	39.34	57.53	61.57	68.20	6.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

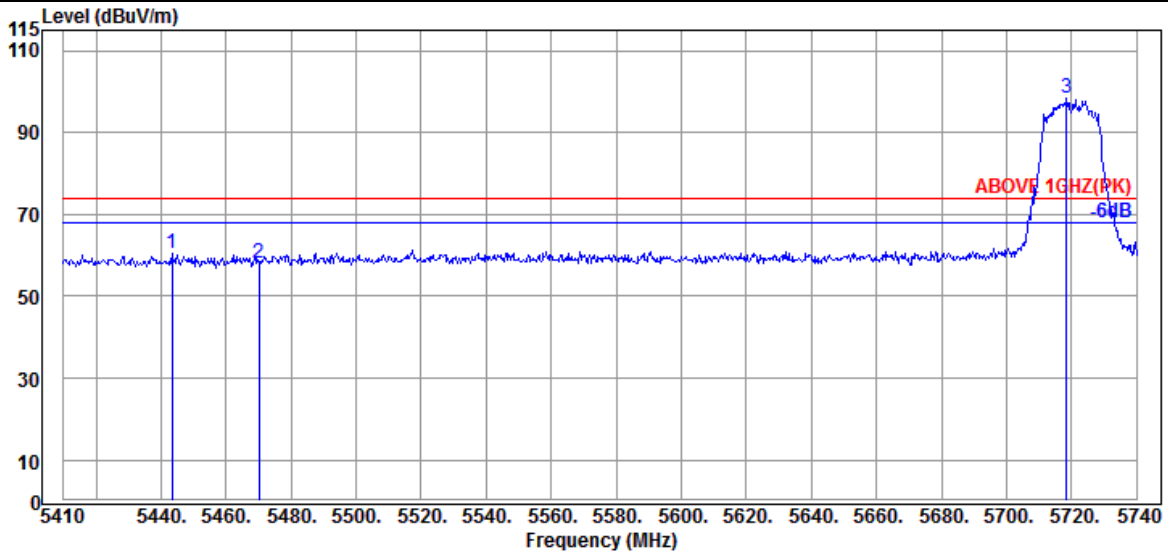

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.330	34.17	9.04	39.26	56.37	60.32	74.00	13.68	Peak
5470.060	34.17	9.06	39.26	53.97	57.94	74.00	16.06	Peak
@ 5718.550	33.80	9.19	39.30	94.67	98.36	---	---	Peak

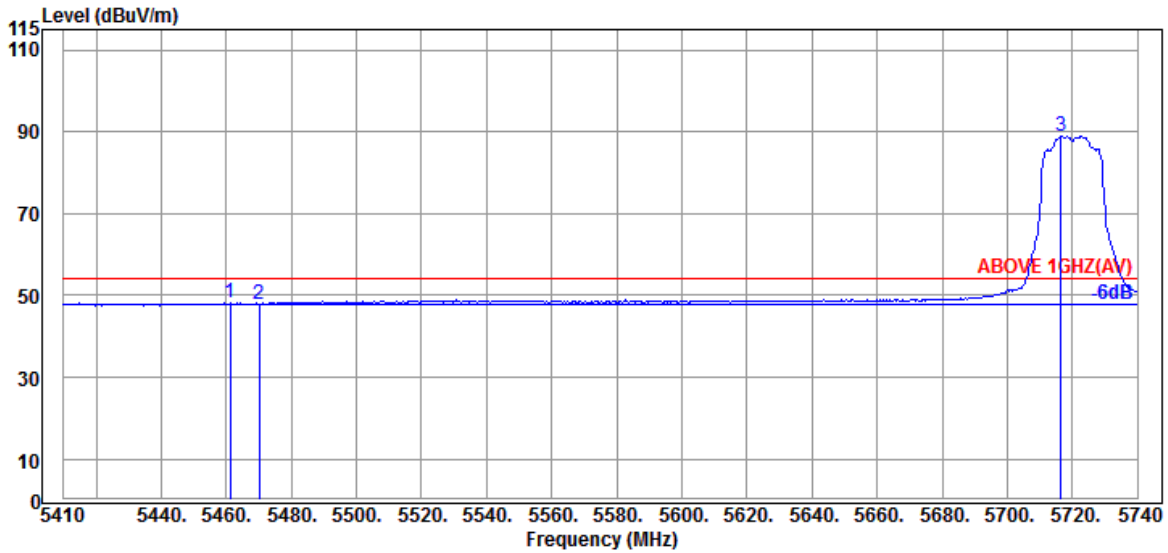


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.20	9.05	39.26	44.13	48.12	54.00	5.88	Average
5470.060	34.17	9.06	39.26	43.96	47.93	54.00	6.07	Average
@ 5716.570	33.80	9.19	39.30	85.41	89.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

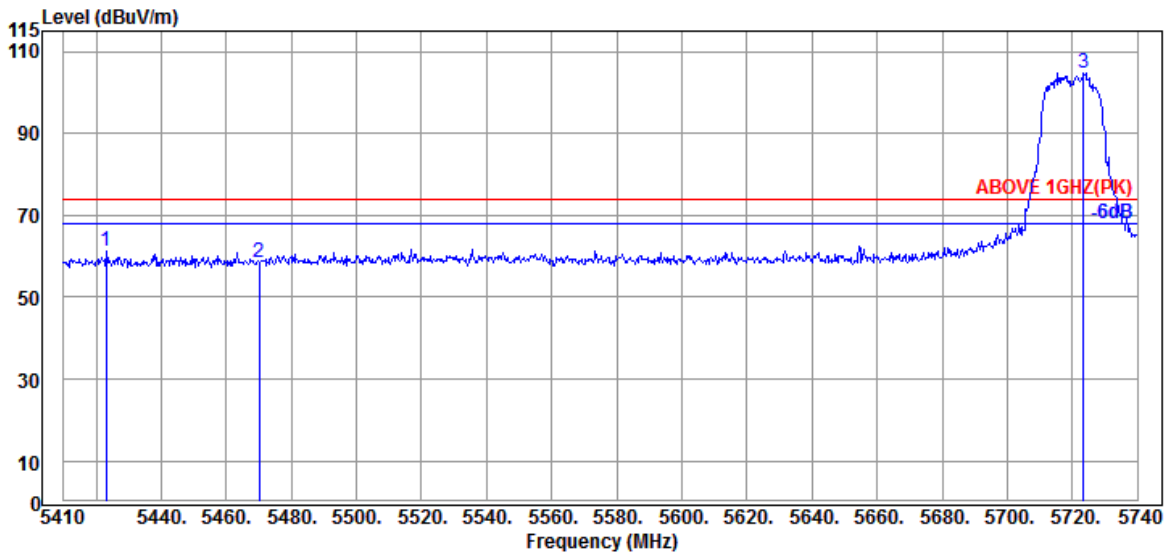

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.200	34.15	9.04	39.27	57.18	61.10	74.00	12.90	Peak
5470.060	34.17	9.06	39.26	54.54	58.51	74.00	15.49	Peak
@ 5723.500	33.80	9.20	39.30	101.14	104.84	---	---	Peak

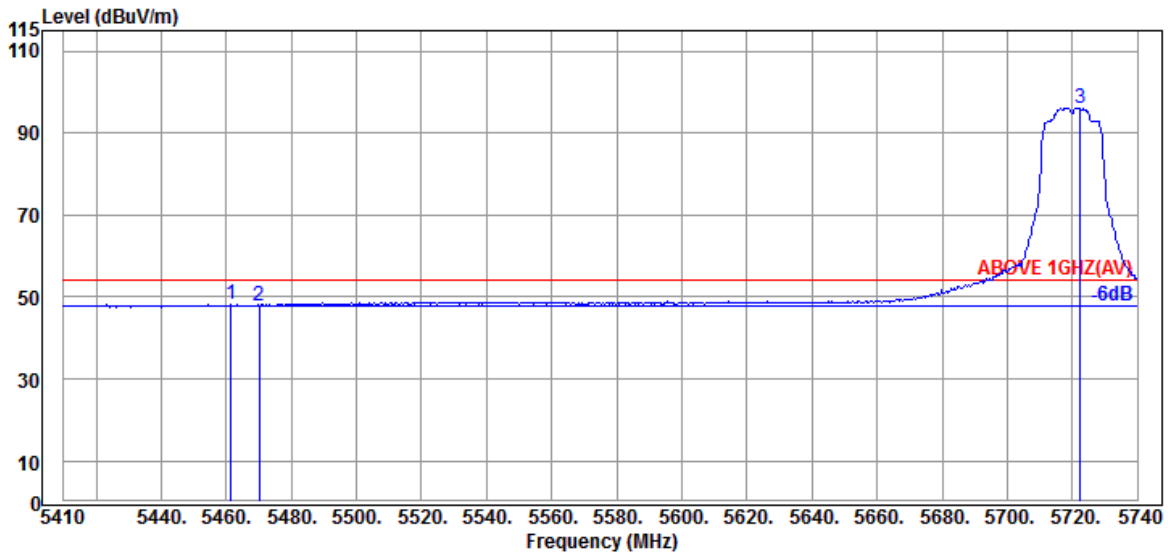


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.480	34.20	9.05	39.26	44.17	48.16	54.00	5.84	Average
5470.060	34.17	9.06	39.26	44.03	48.00	54.00	6.00	Average
@ 5722.510	33.80	9.20	39.30	92.43	96.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

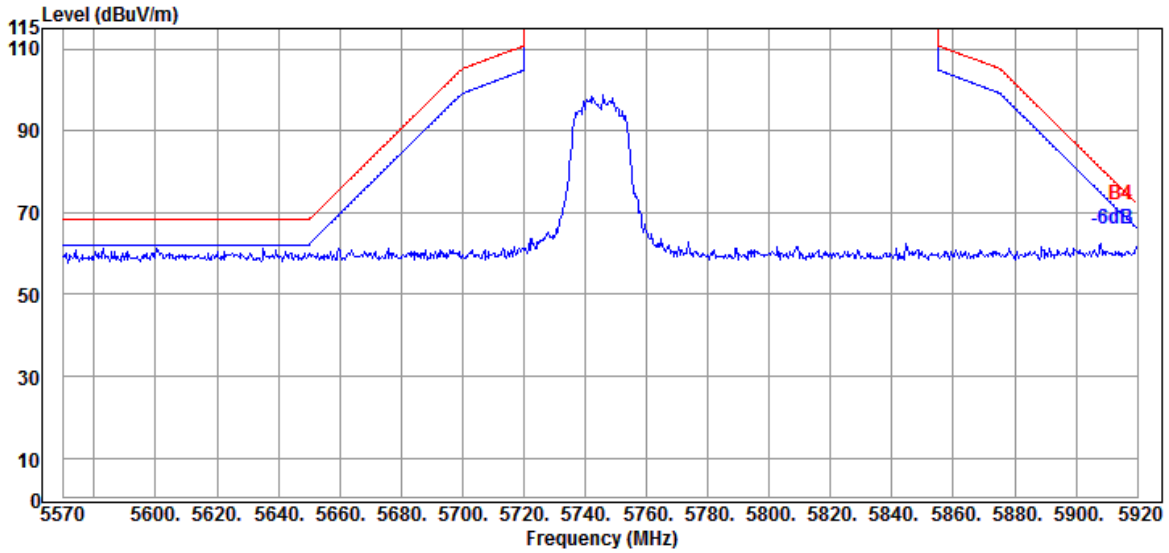


Antenna at Vertical Polarization

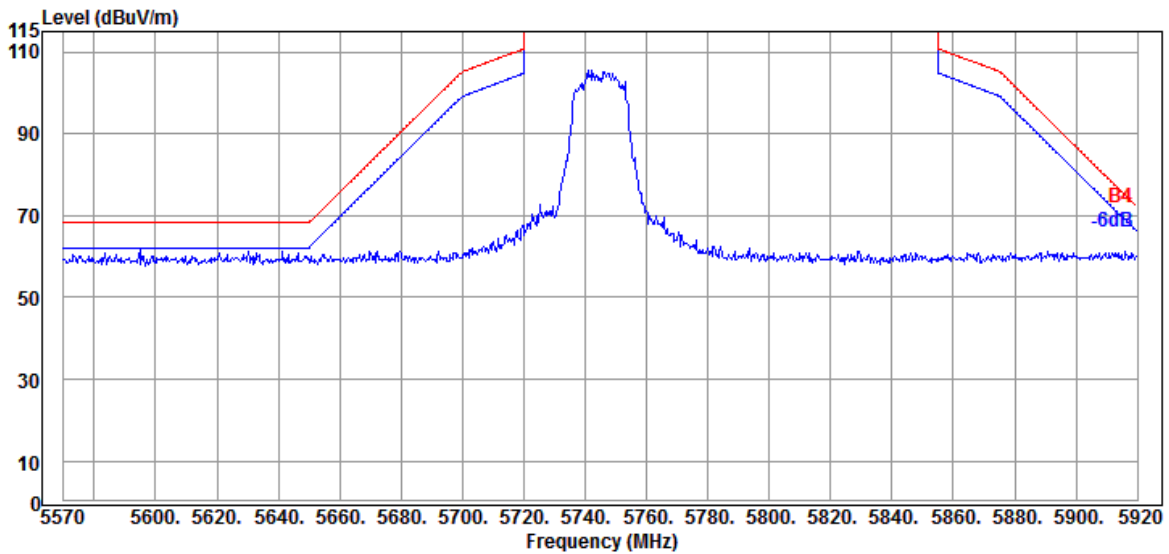


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

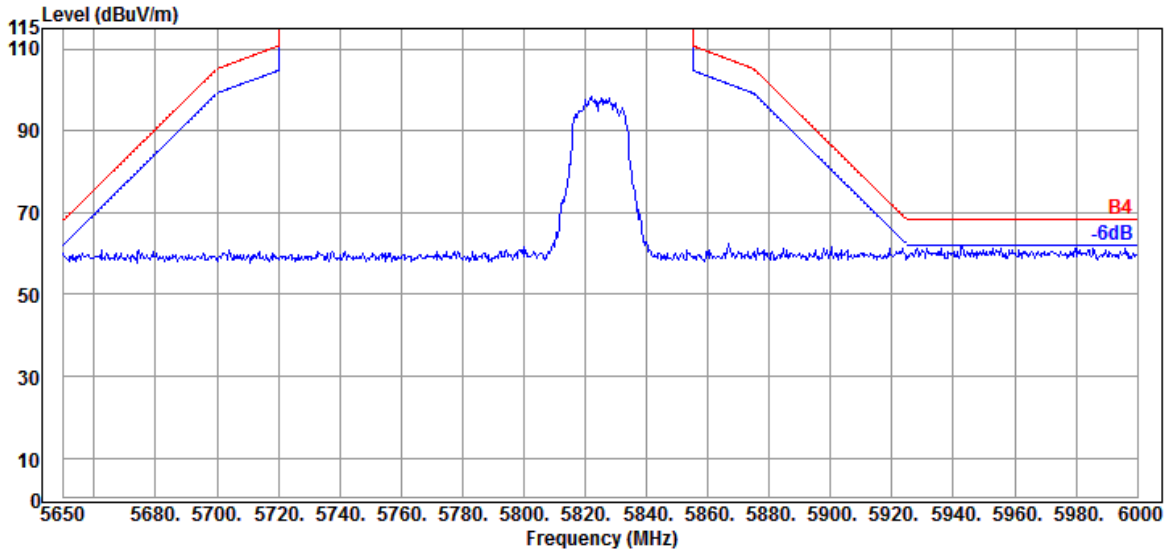

Antenna at Vertical Polarization

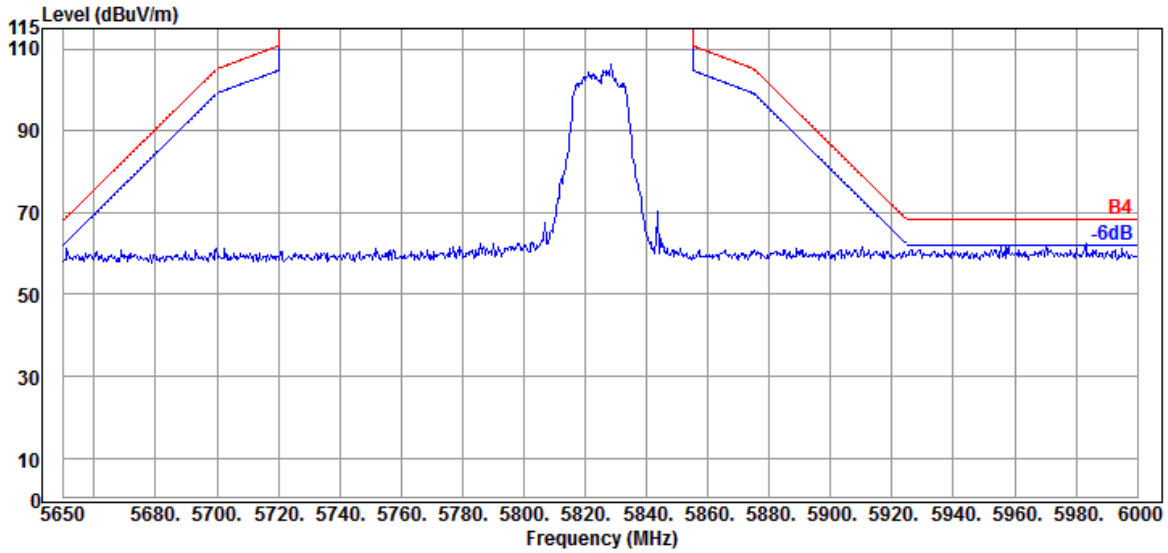


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

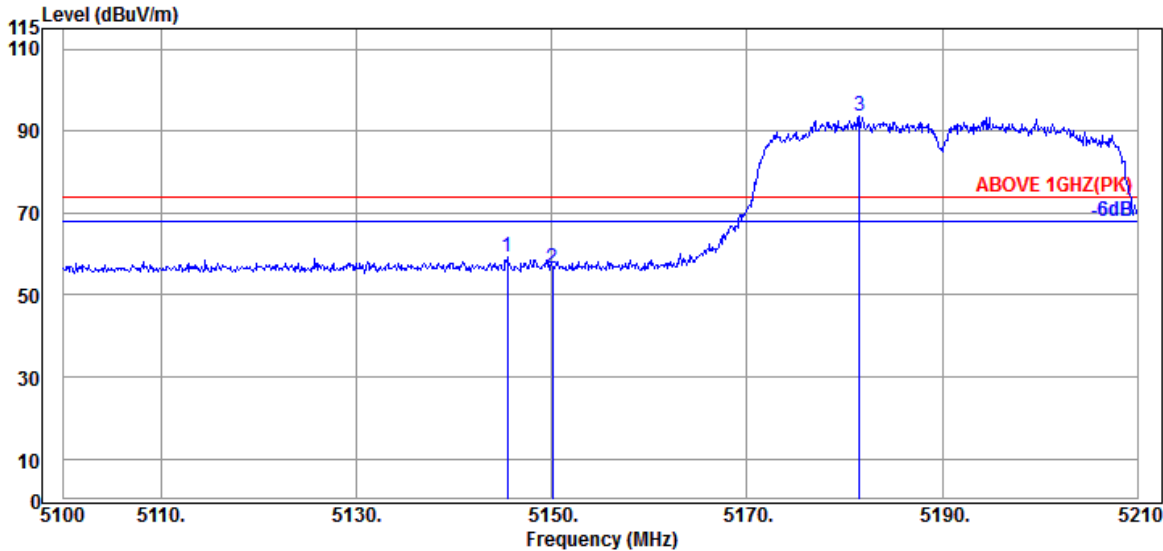

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.430	33.70	8.88	39.29	55.93	59.22	74.00	14.78	Peak
5150.050	33.70	8.88	39.29	53.27	56.56	74.00	17.44	Peak
@ 5181.510	33.70	8.90	39.28	90.32	93.64	---	---	Peak

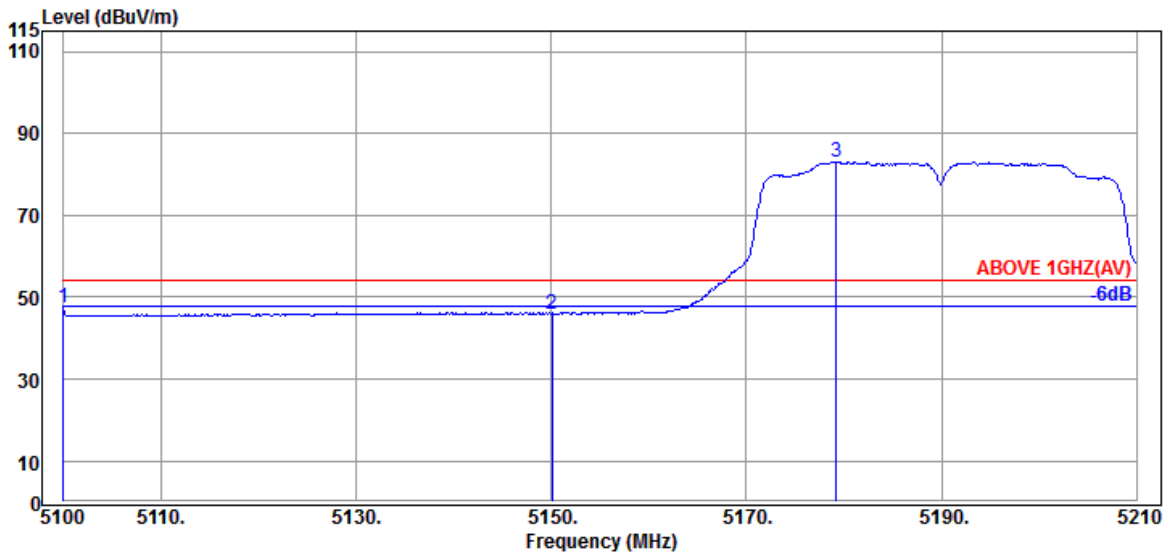


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	33.70	8.86	39.29	44.06	47.33	54.00	6.67	Average
5150.050	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5179.200	33.70	8.90	39.28	79.77	83.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

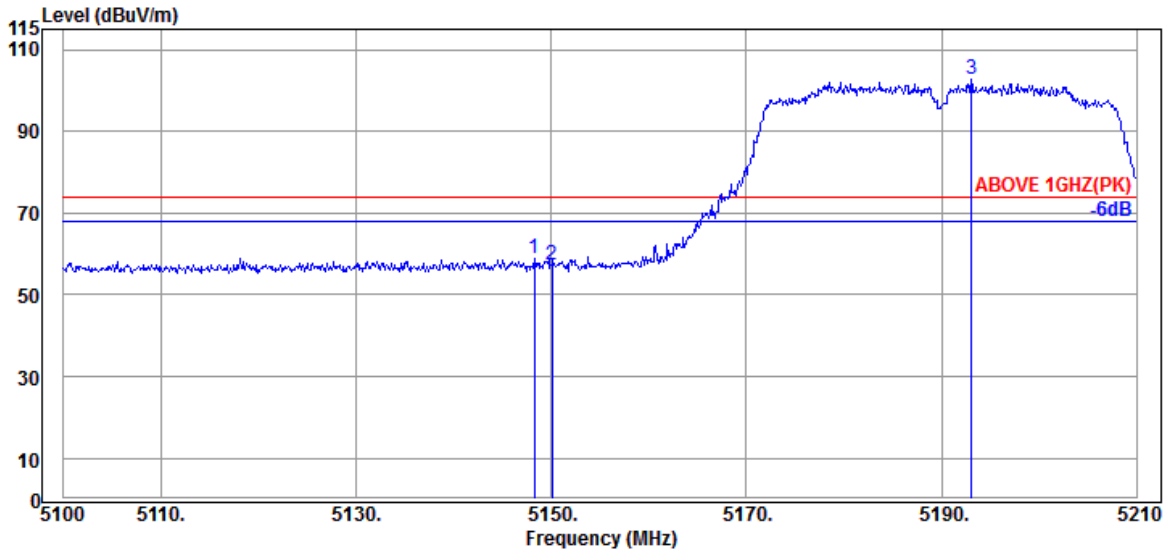

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.290	33.70	8.88	39.29	55.45	58.74	74.00	15.26	Peak
5150.050	33.70	8.88	39.29	53.82	57.11	74.00	16.89	Peak
@ 5193.060	33.70	8.91	39.28	99.29	102.62	---	---	Peak

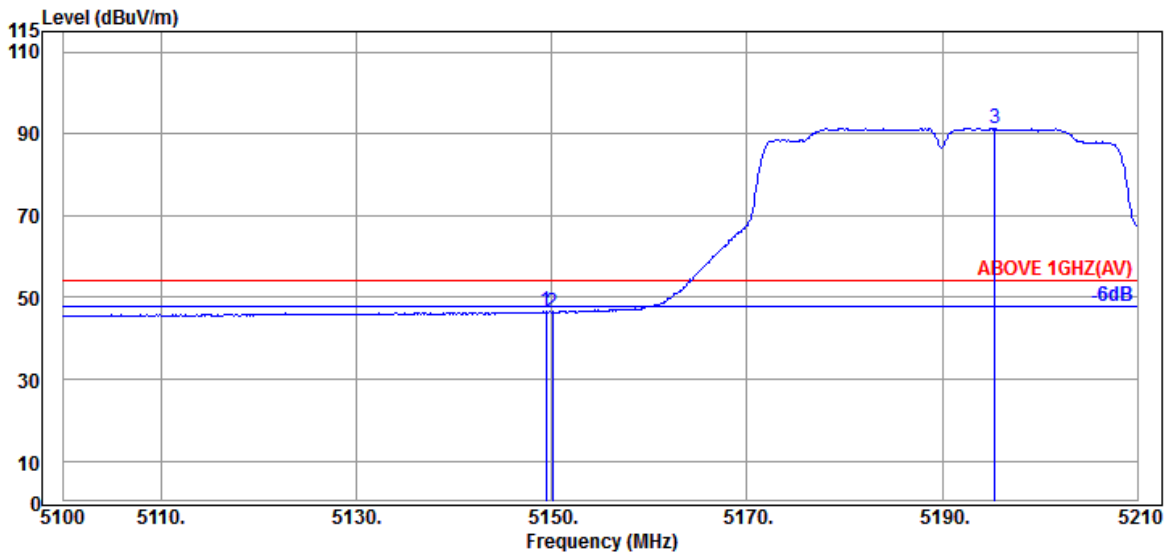


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.70	8.88	39.29	43.28	46.57	54.00	7.43	Average
5150.050	33.70	8.88	39.29	43.08	46.37	54.00	7.63	Average
@ 5195.370	33.70	8.91	39.28	88.15	91.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

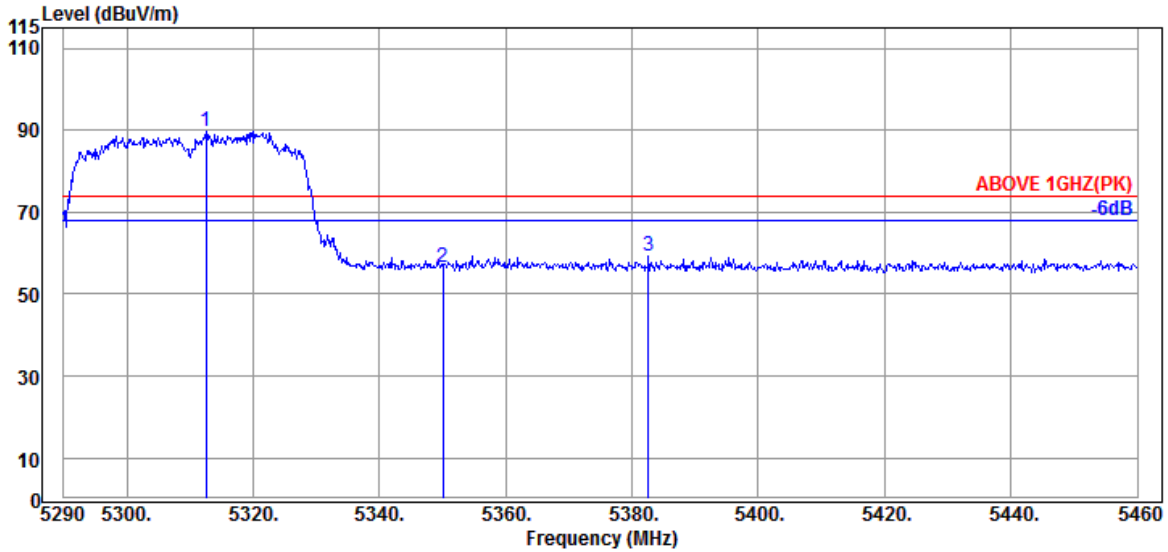

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.610	34.03	8.98	39.27	85.91	89.65	---	---	Peak
5350.010	33.90	8.99	39.27	52.82	56.44	74.00	17.56	Peak
5382.650	34.03	9.01	39.27	55.67	59.44	74.00	14.56	Peak

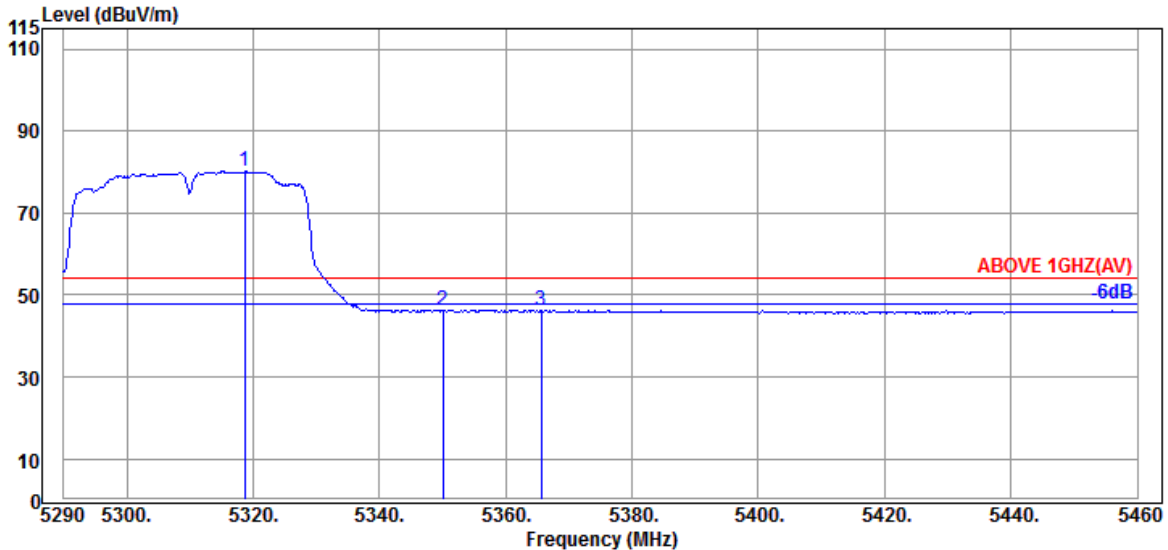


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.730	34.03	8.98	39.27	76.42	80.16	---	---	Average
5350.010	33.90	8.99	39.27	42.74	46.36	54.00	7.64	Average
5365.650	33.97	9.00	39.27	42.63	46.33	54.00	7.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

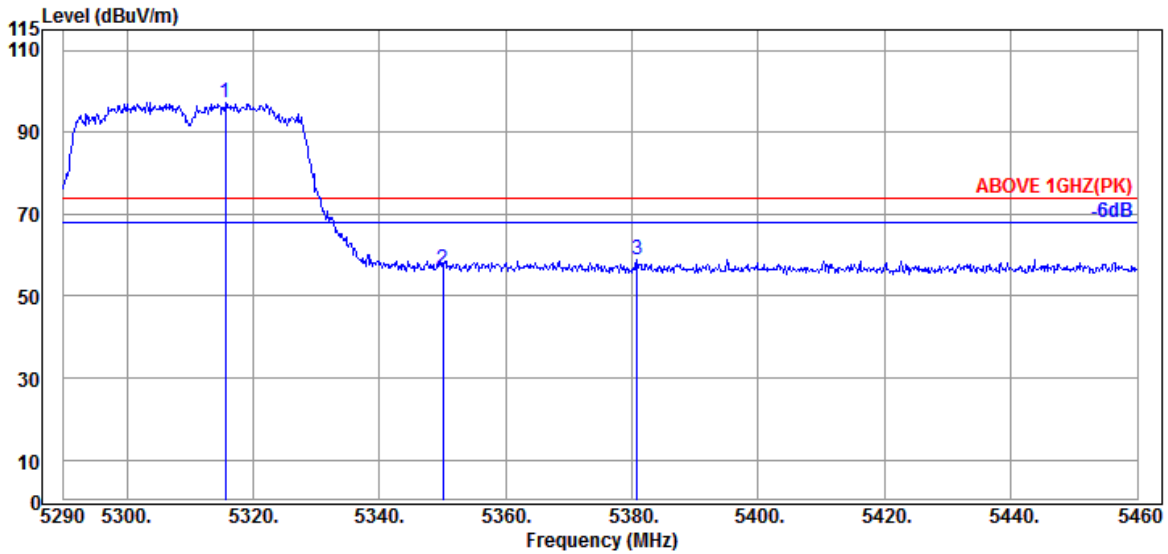

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.670	34.03	8.98	39.27	93.53	97.27	---	---	Peak
5350.010	33.90	8.99	39.27	53.00	56.62	74.00	17.38	Peak
5380.780	34.03	9.01	39.27	55.16	58.93	74.00	15.07	Peak

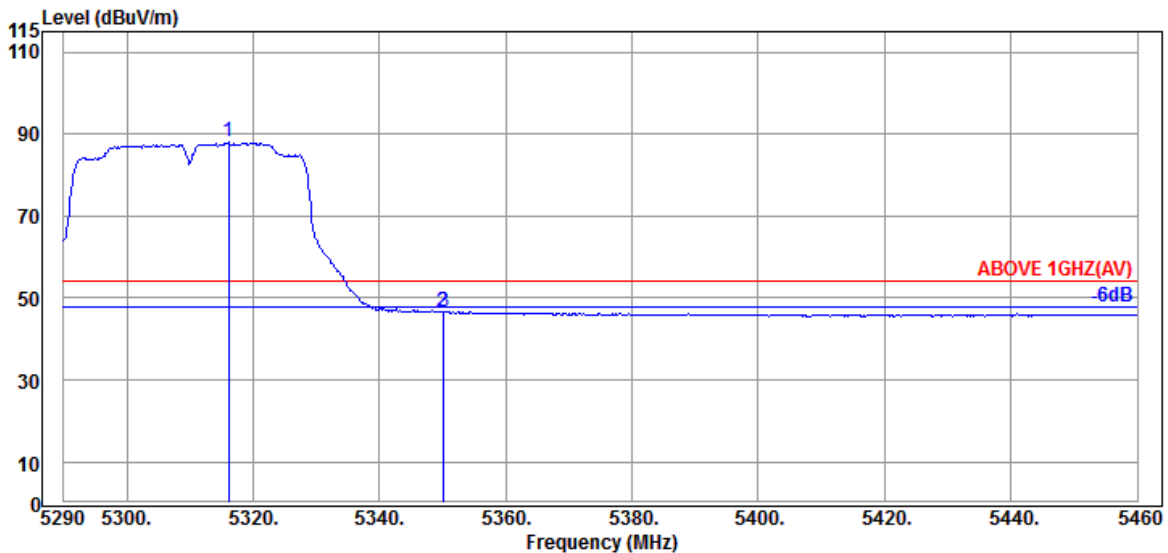


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	34.03	8.98	39.27	84.25	87.99	---	---	Average
5350.010	33.90	8.99	39.27	43.07	46.69	54.00	7.31	Average
5350.180	33.90	8.99	39.27	43.05	46.67	54.00	7.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

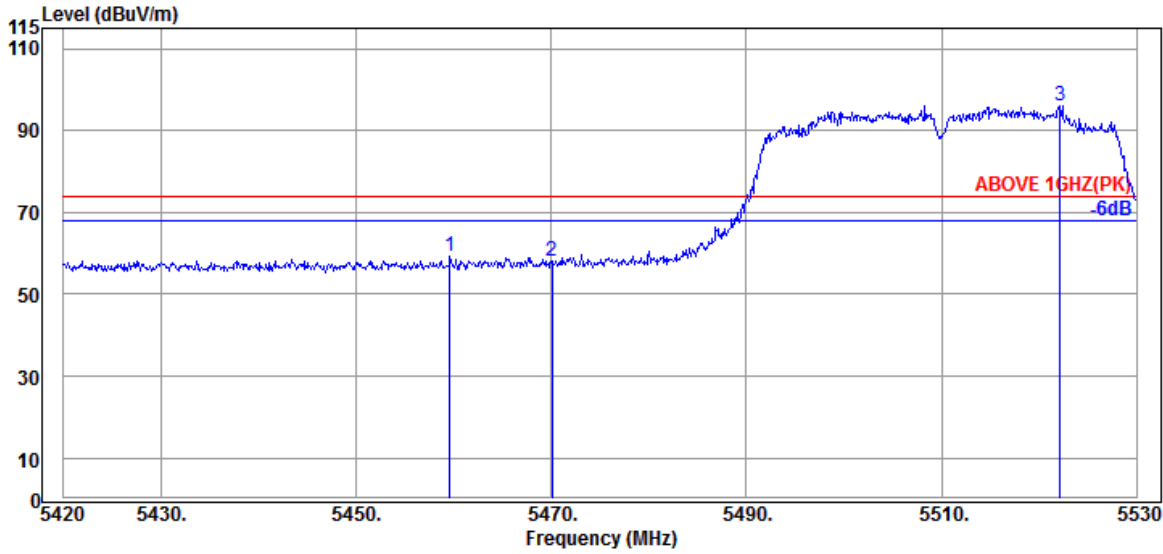

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.20	9.05	39.26	55.10	59.09	74.00	14.91	Peak
5470.050	34.17	9.06	39.26	54.31	58.28	74.00	15.72	Peak
@ 5522.190	34.10	9.09	39.26	92.11	96.04	---	---	Peak

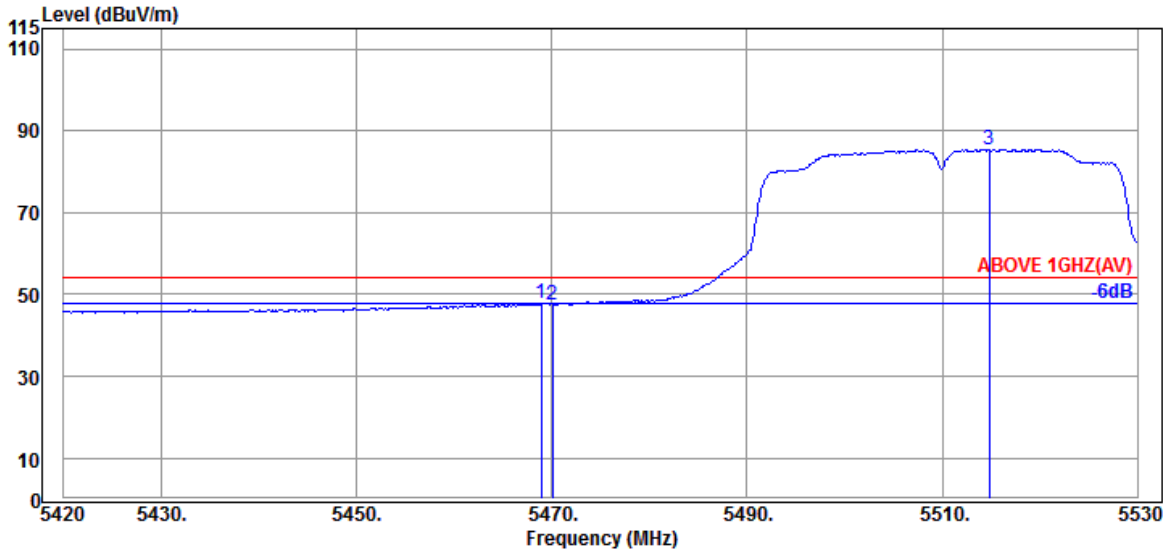


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	43.84	47.81	54.00	6.19	Average
5470.050	34.17	9.06	39.26	43.65	47.62	54.00	6.38	Average
@ 5514.820	34.10	9.09	39.26	81.58	85.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

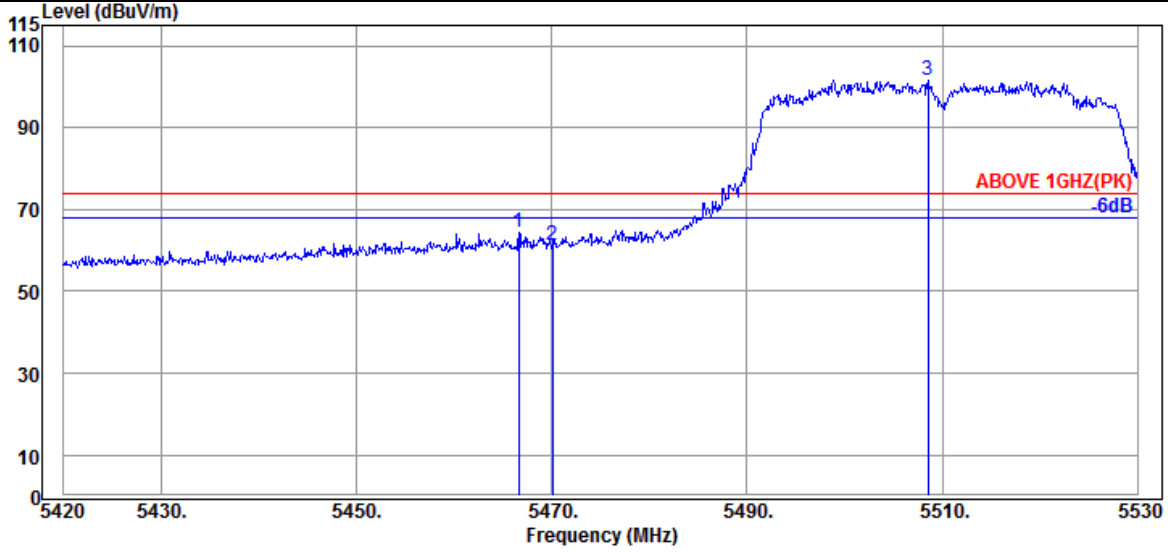

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.640	34.17	9.06	39.26	60.58	64.55	74.00	9.45	Peak
5470.050	34.17	9.06	39.26	57.25	61.22	74.00	12.78	Peak
@ 5508.550	34.10	9.08	39.26	97.53	101.45	---	---	Peak

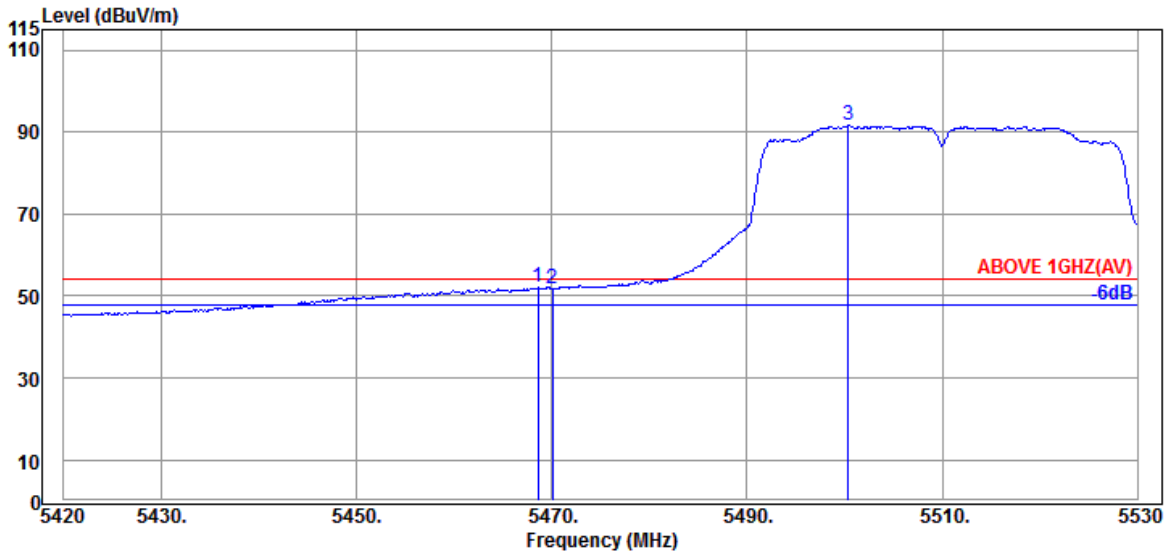


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.17	9.06	39.26	48.08	52.05	54.00	1.95	Average
5470.050	34.17	9.06	39.26	47.72	51.69	54.00	2.31	Average
@ 5500.410	34.10	9.08	39.26	87.84	91.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

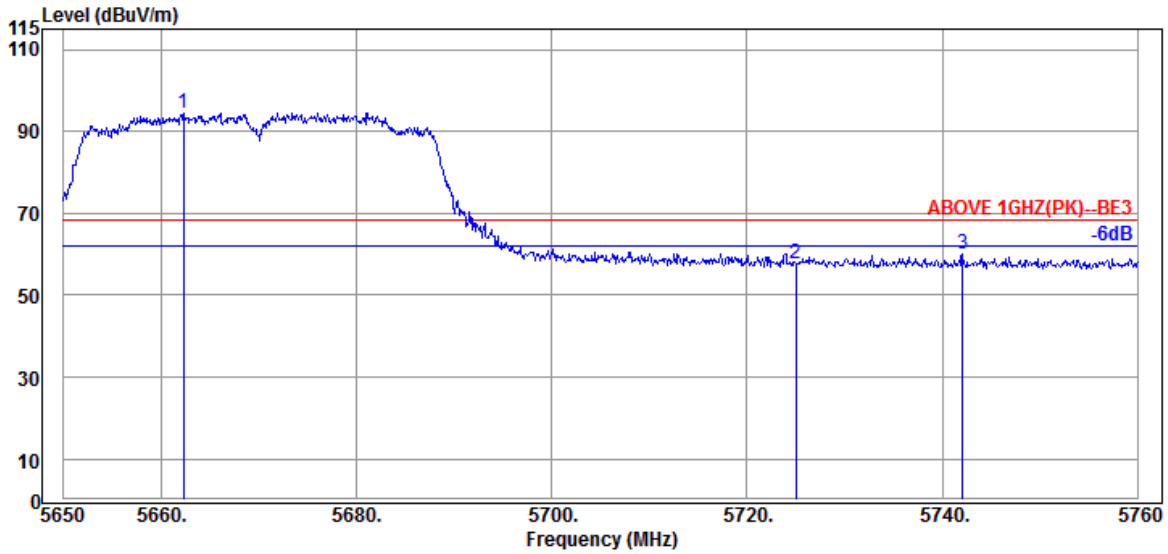

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.320	33.93	9.16	39.29	90.83	94.63	---	---	Peak
5725.020	33.80	9.20	39.30	54.04	57.74	68.20	10.46	Peak
5742.070	33.80	9.20	39.31	56.31	60.00	68.20	8.20	Peak

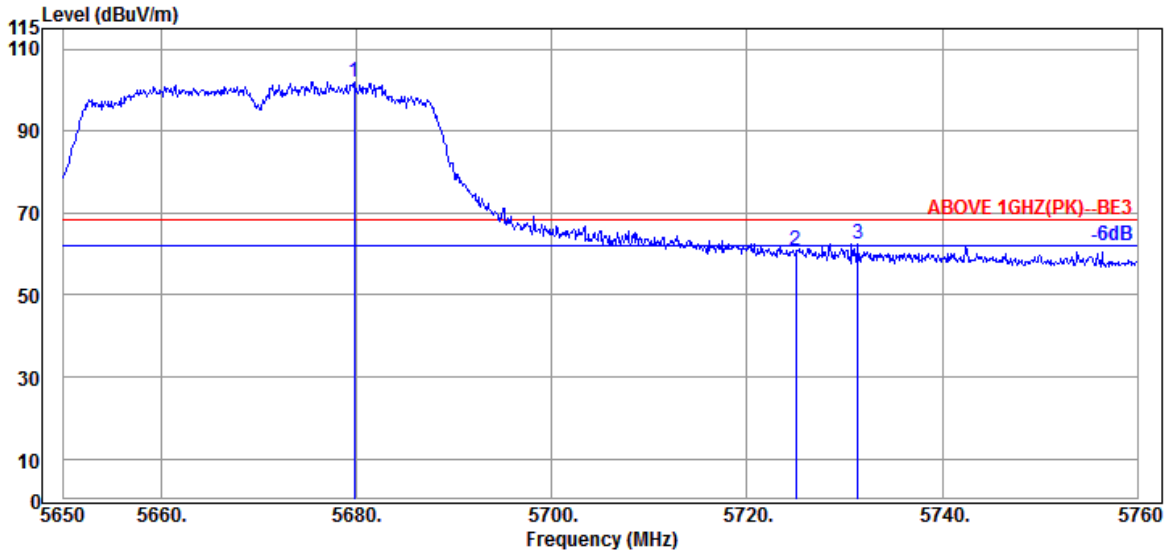


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.810	33.87	9.17	39.30	98.14	101.88	---	---	Peak
5725.020	33.80	9.20	39.30	57.19	60.89	68.20	7.31	Peak
5731.400	33.80	9.20	39.31	58.77	62.46	68.20	5.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

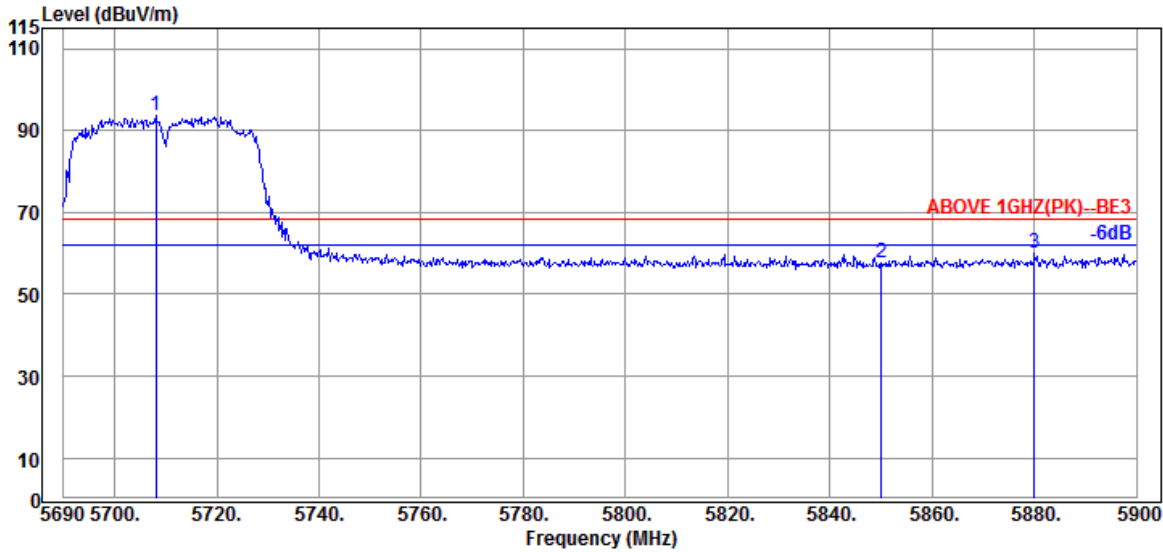

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.060	33.80	9.19	39.30	90.13	93.82	---	---	Peak
5850.020	34.10	9.25	39.33	53.57	57.59	68.20	10.61	Peak
5880.050	34.10	9.27	39.34	55.85	59.88	68.20	8.32	Peak

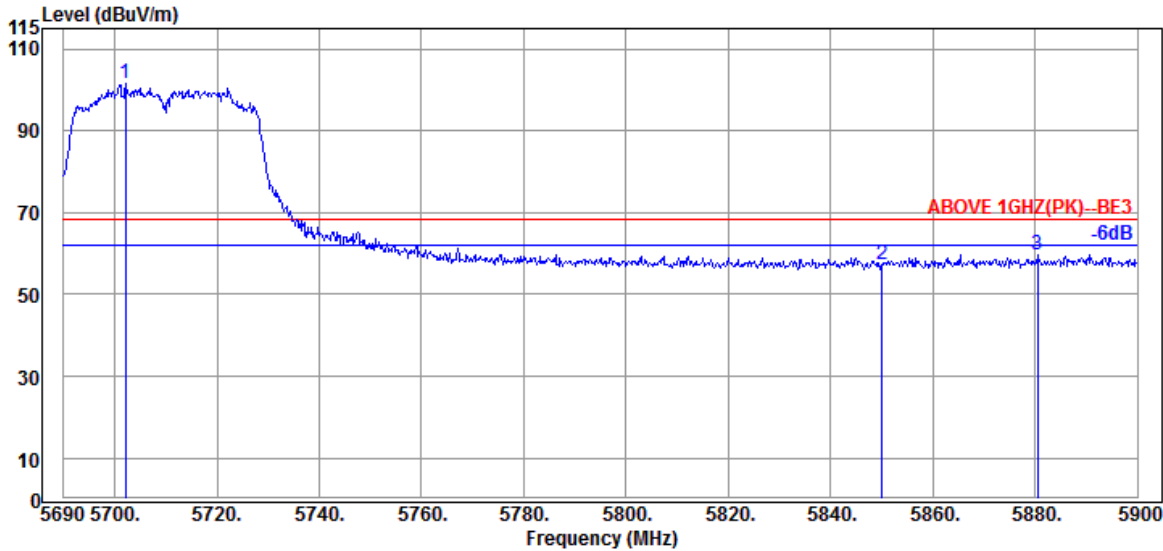


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.180	33.80	9.18	39.30	97.84	101.52	---	---	Peak
5850.020	34.10	9.25	39.33	53.32	57.34	68.20	10.86	Peak
5880.470	34.10	9.27	39.34	55.84	59.87	68.20	8.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

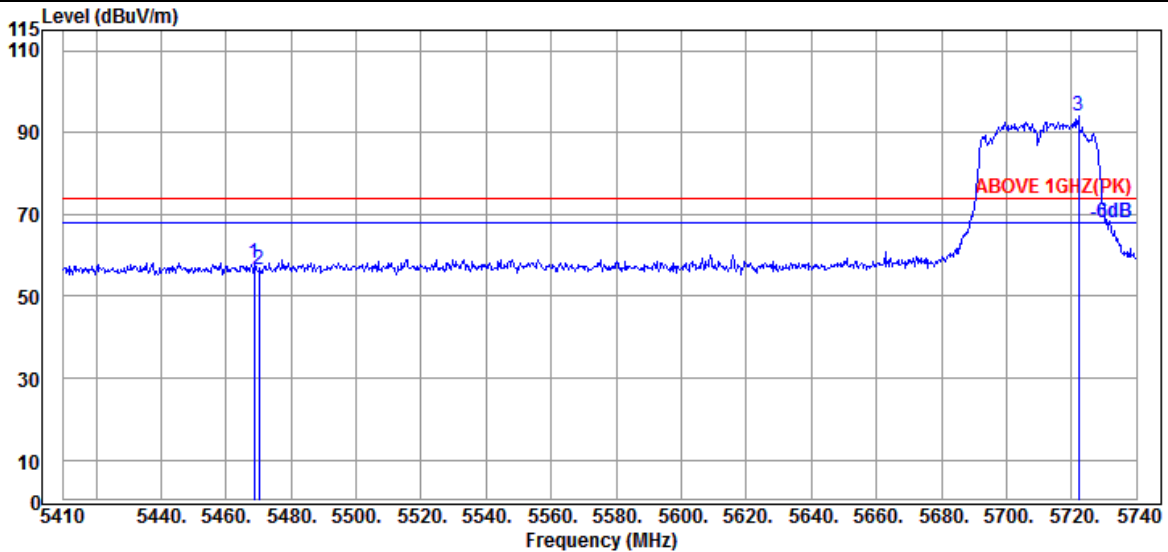

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.740	34.17	9.06	39.26	54.18	58.15	74.00	15.85	Peak
5470.060	34.17	9.06	39.26	52.47	56.44	74.00	17.56	Peak
@ 5722.180	33.80	9.20	39.30	90.18	93.88	---	---	Peak

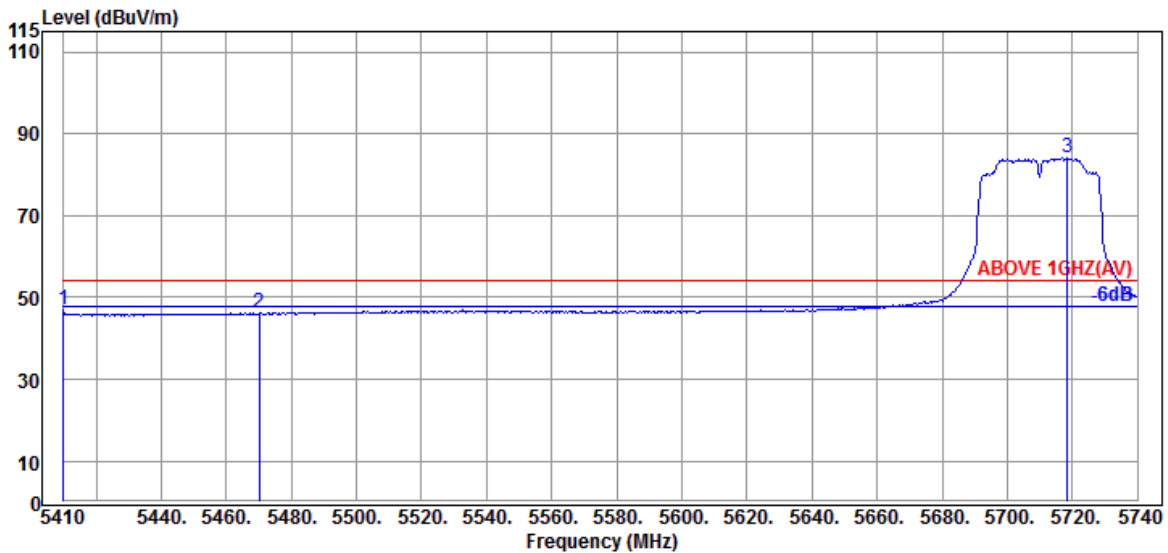


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5410.000	34.12	9.03	39.27	43.17	47.05	54.00	6.95	Average
5470.060	34.17	9.06	39.26	42.12	46.09	54.00	7.91	Average
@ 5718.550	33.80	9.19	39.30	80.33	84.02	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

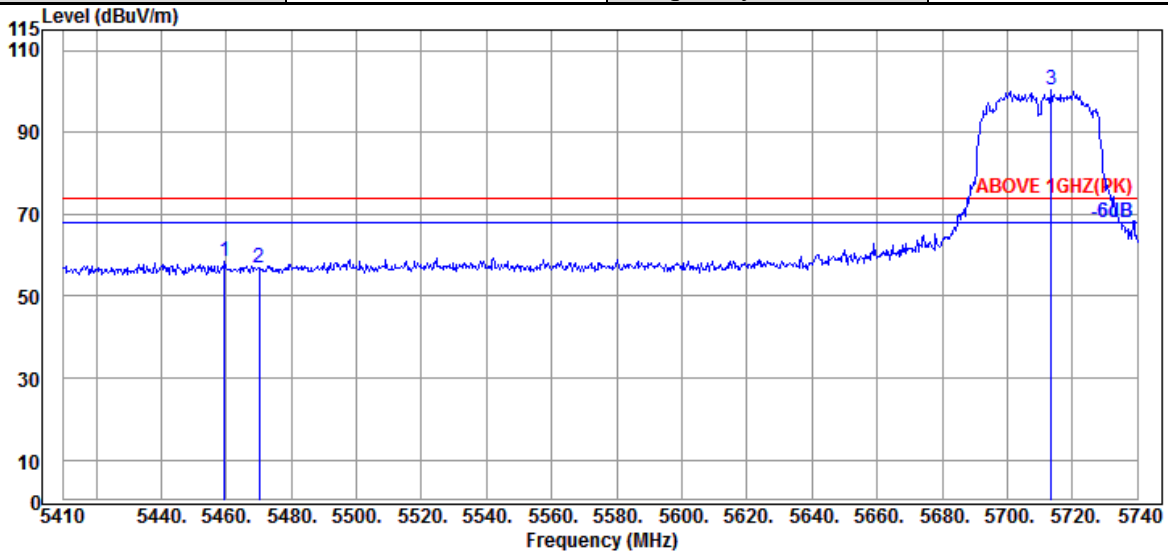

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.500	34.20	9.05	39.26	54.52	58.51	74.00	15.49	Peak
5470.060	34.17	9.06	39.26	52.94	56.91	74.00	17.09	Peak
@ 5713.600	33.80	9.19	39.30	96.65	100.34	---	---	Peak

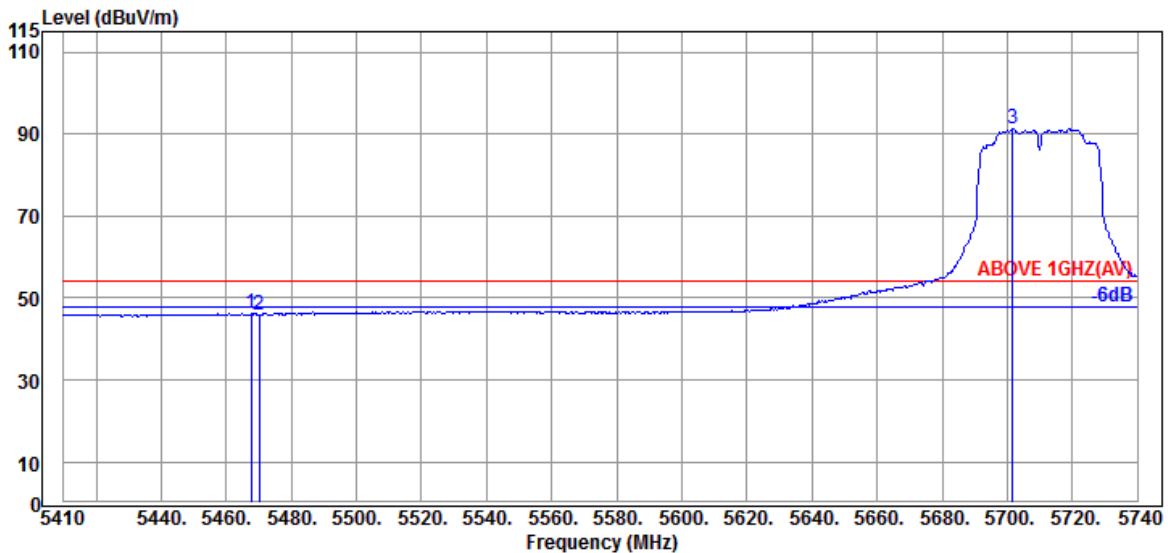


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.750	34.17	9.06	39.26	42.13	46.10	54.00	7.90	Average
5470.060	34.17	9.06	39.26	42.07	46.04	54.00	7.96	Average
@ 5701.720	33.80	9.18	39.30	87.72	91.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

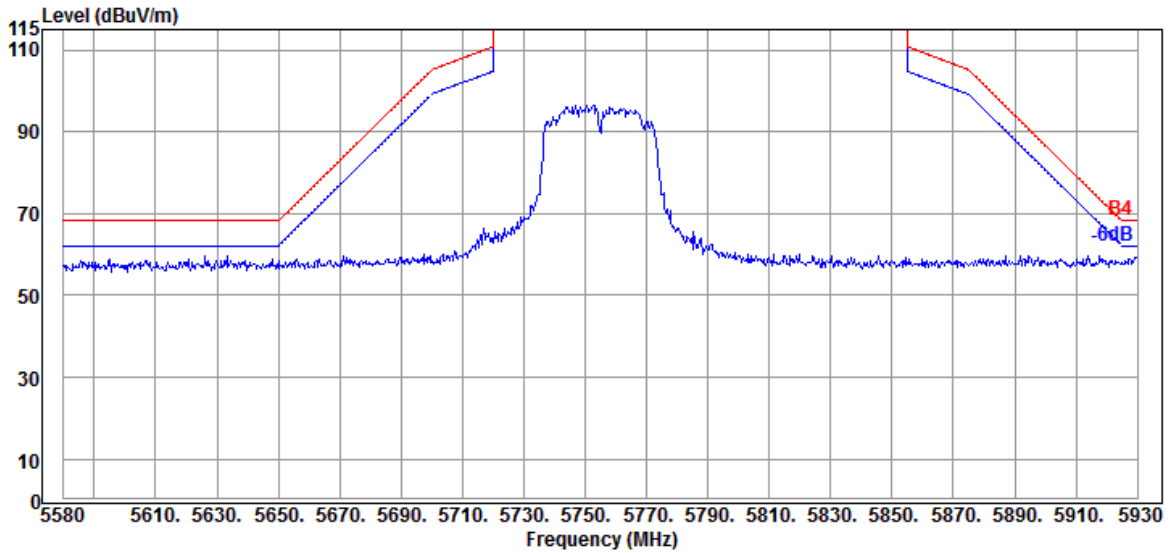


Antenna at Vertical Polarization

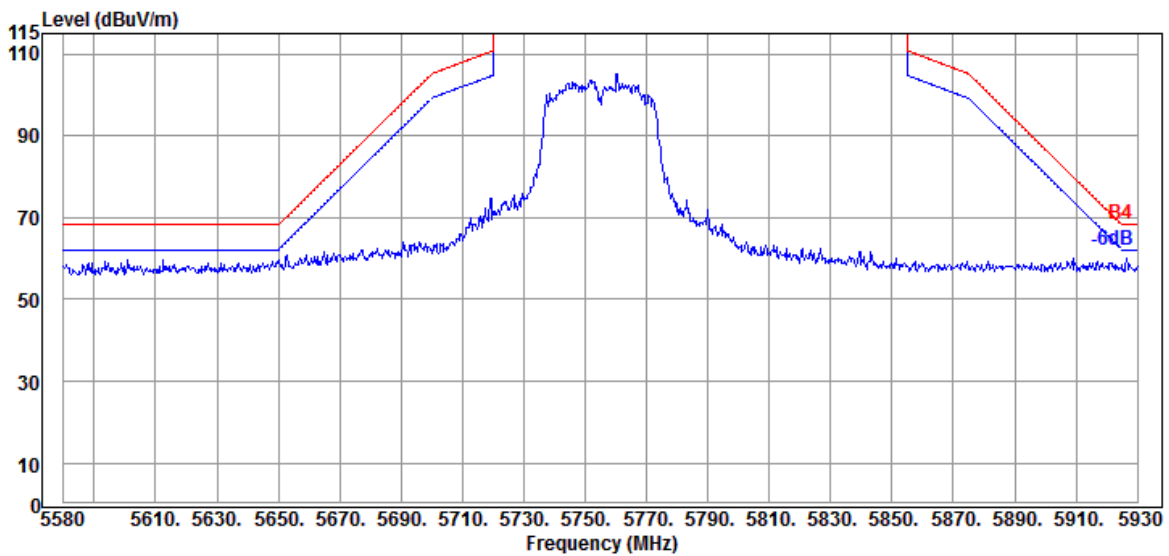


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

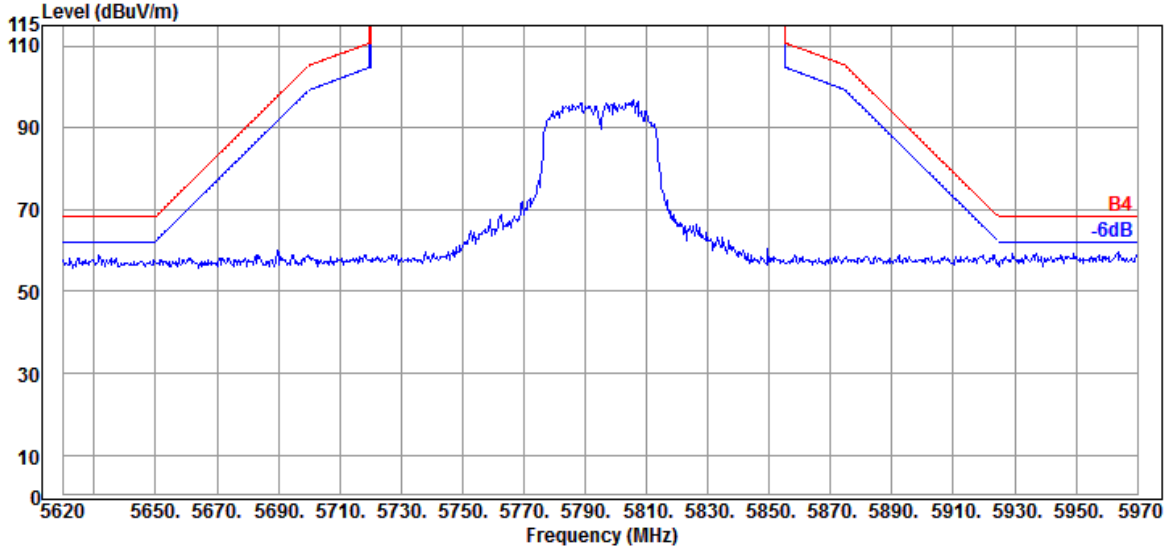

Antenna at Vertical Polarization

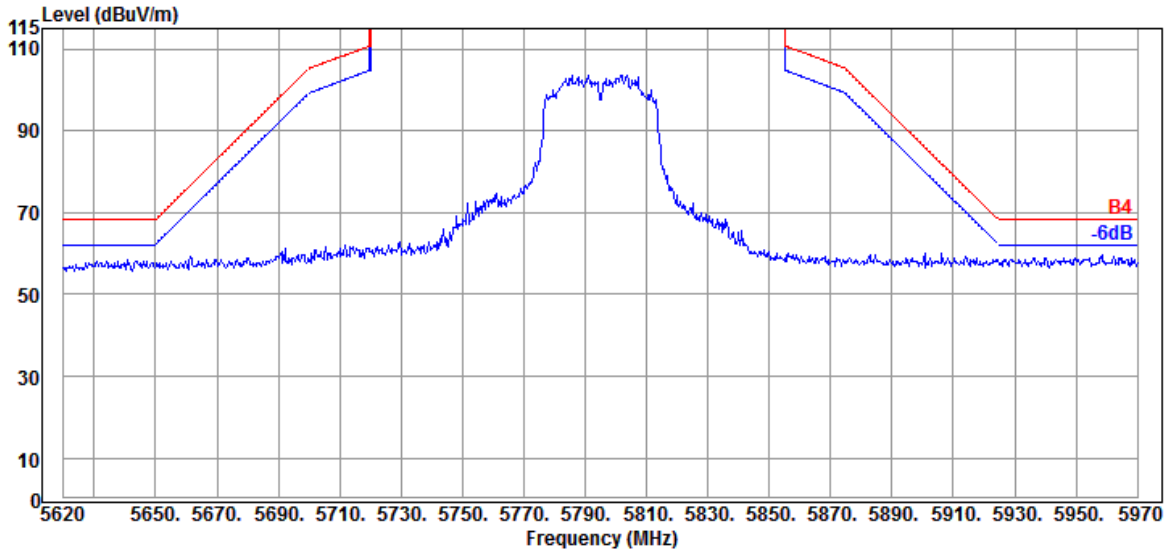


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

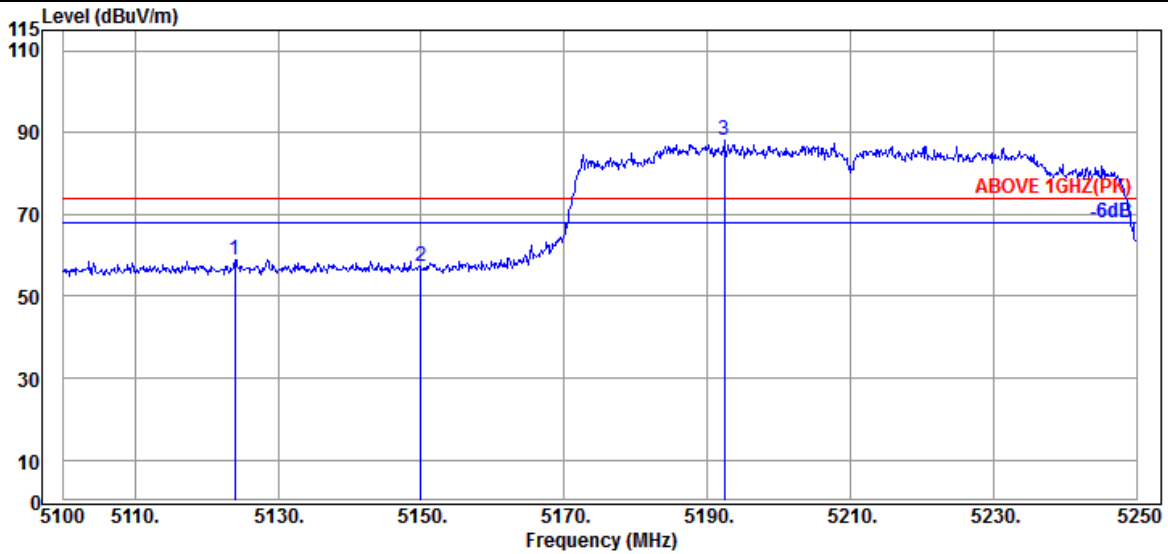

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.000	33.70	8.87	39.29	55.68	58.96	74.00	15.04	Peak
5149.950	33.70	8.88	39.29	53.89	57.18	74.00	16.82	Peak
@ 5192.400	33.70	8.91	39.28	84.85	88.18	---	---	Peak

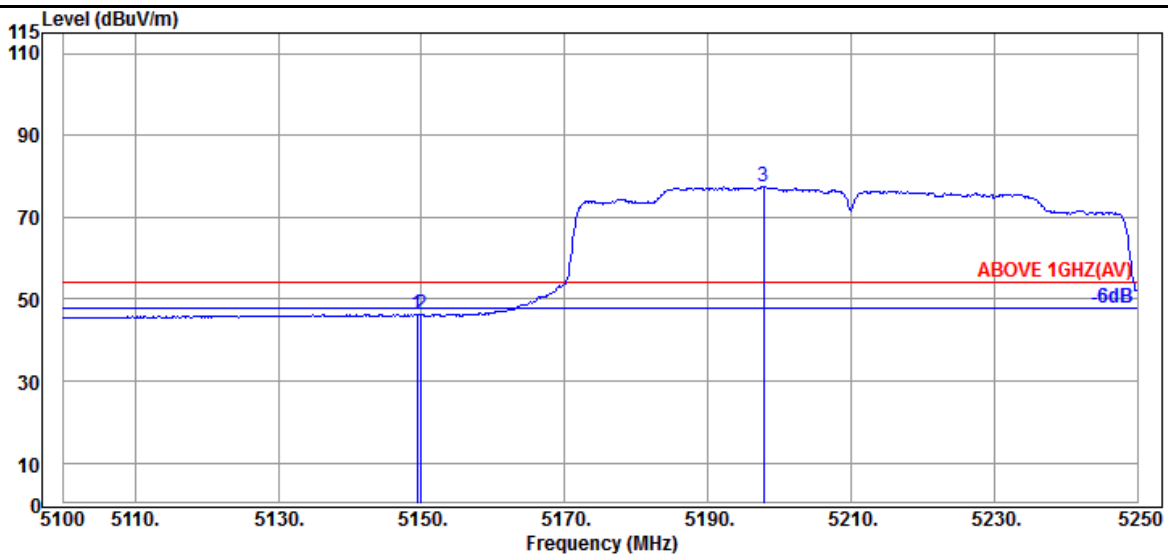


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	33.70	8.88	39.29	43.01	46.30	54.00	7.70	Average
5149.950	33.70	8.88	39.29	42.83	46.12	54.00	7.88	Average
@ 5197.800	33.70	8.91	39.28	74.25	77.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

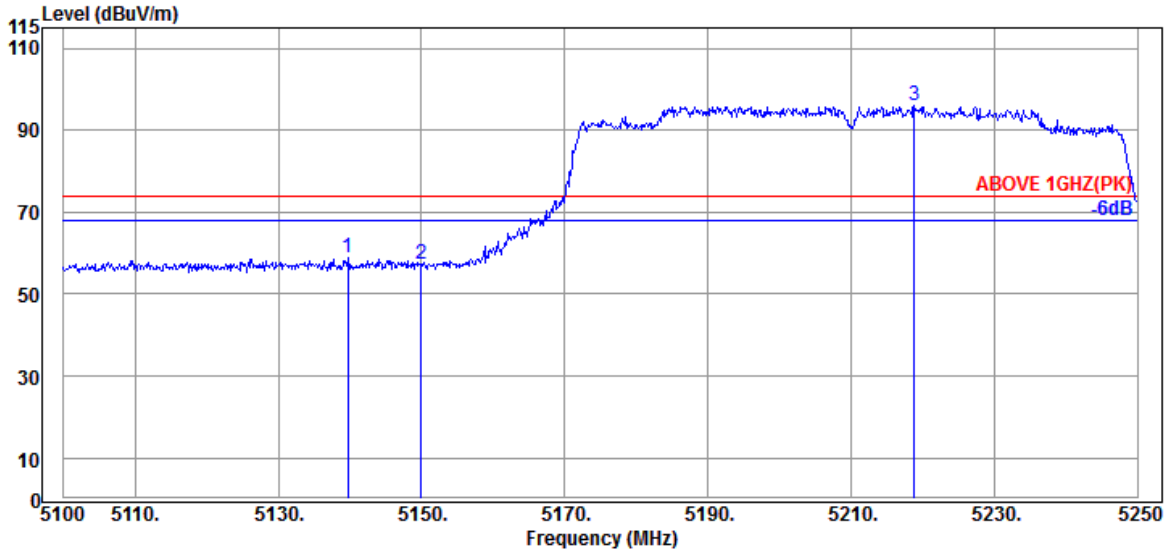

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.750	33.70	8.88	39.29	55.47	58.76	74.00	15.24	Peak
5149.950	33.70	8.88	39.29	53.99	57.28	74.00	16.72	Peak
@ 5218.800	33.75	8.93	39.28	92.58	95.98	---	---	Peak

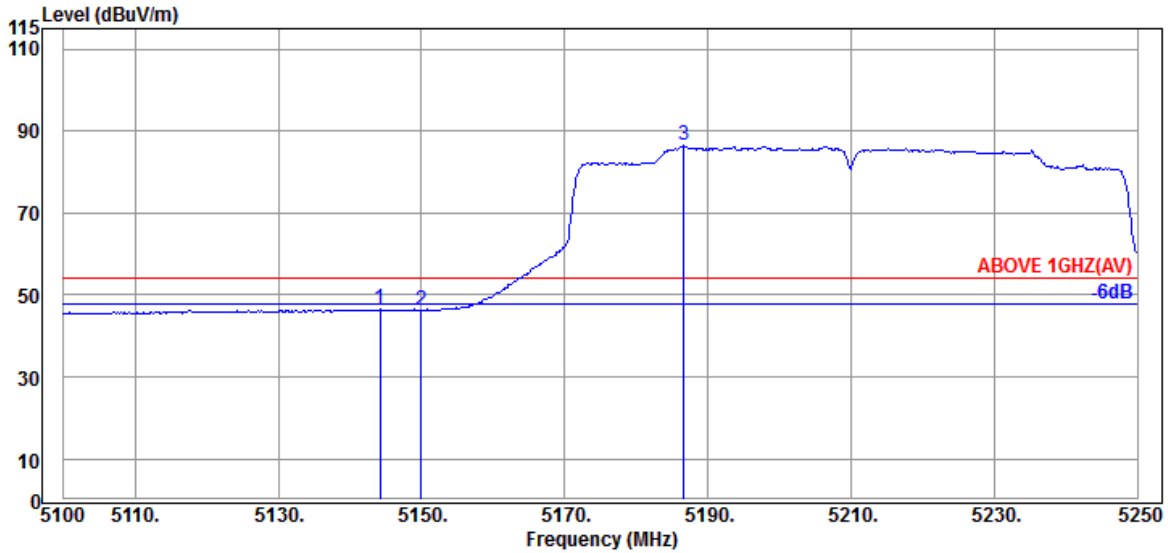


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.250	33.70	8.88	39.29	43.19	46.48	54.00	7.52	Average
5149.950	33.70	8.88	39.29	42.93	46.22	54.00	7.78	Average
@ 5186.700	33.70	8.91	39.28	83.05	86.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

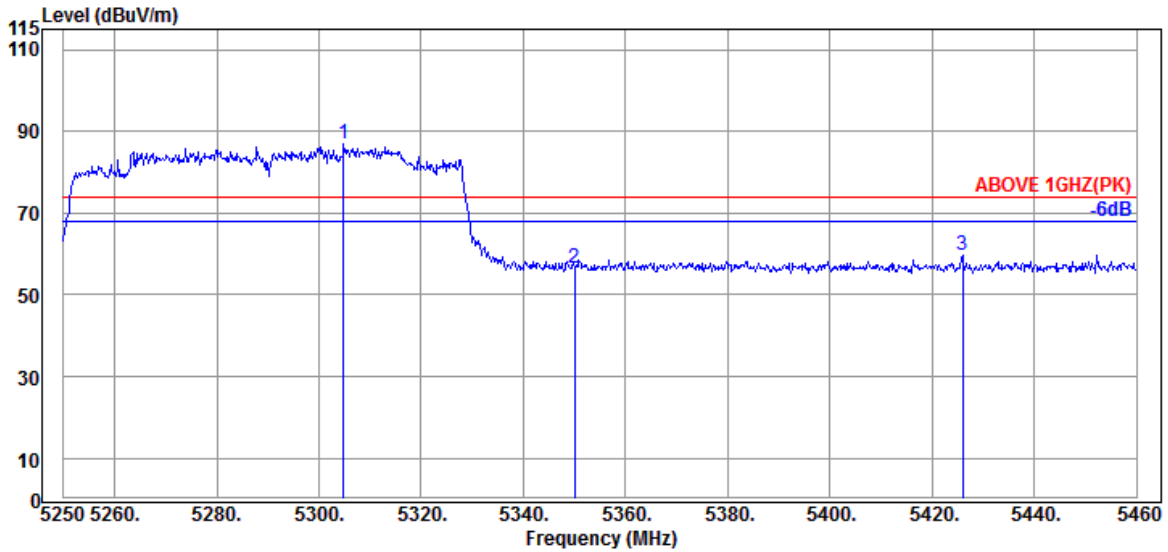

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.810	34.10	8.97	39.28	82.99	86.78	---	---	Peak
5349.960	33.90	8.99	39.27	52.85	56.47	74.00	17.53	Peak
5425.980	34.15	9.04	39.27	55.70	59.62	74.00	14.38	Peak

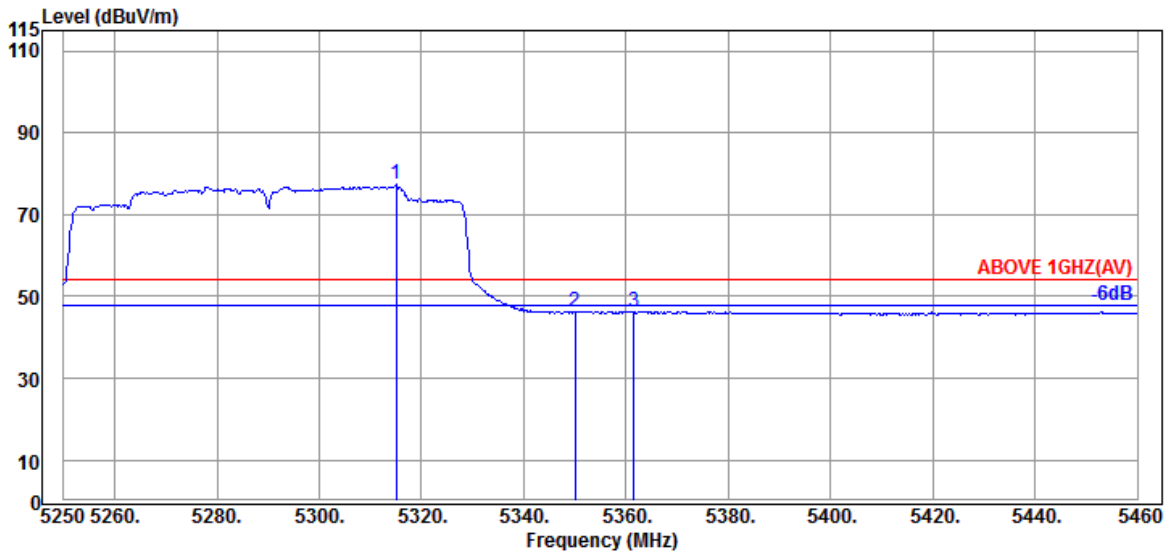


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.100	34.03	8.98	39.27	73.56	77.30	---	---	Average
5349.960	33.90	8.99	39.27	42.52	46.14	54.00	7.86	Average
5361.510	33.97	9.00	39.27	42.65	46.35	54.00	7.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

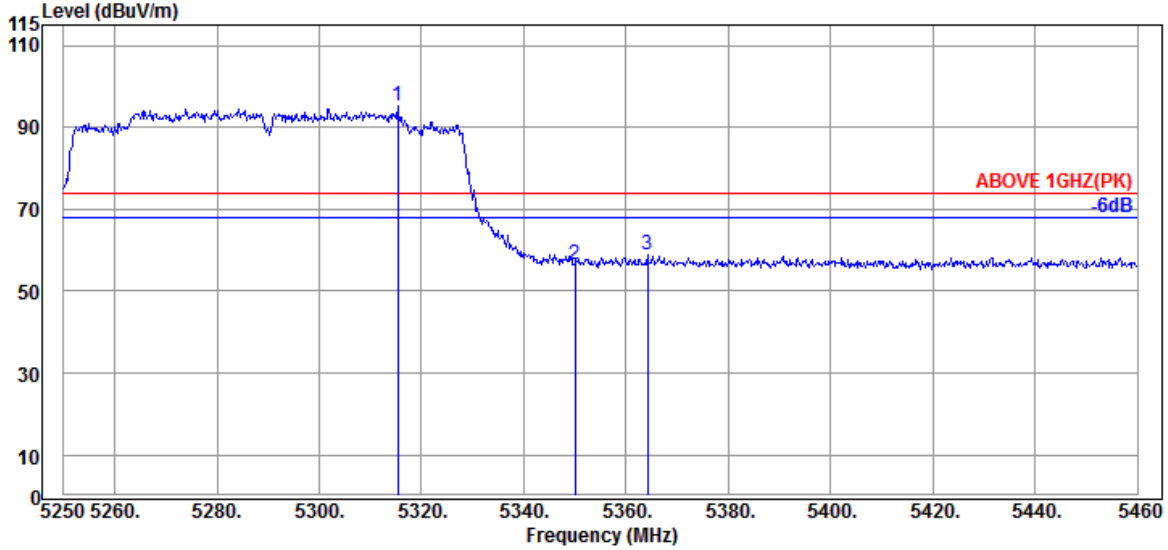

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.310	34.03	8.98	39.27	91.65	95.39	---	---	Peak
5349.960	33.90	8.99	39.27	53.04	56.66	74.00	17.34	Peak
5364.240	33.97	9.00	39.27	55.08	58.78	74.00	15.22	Peak

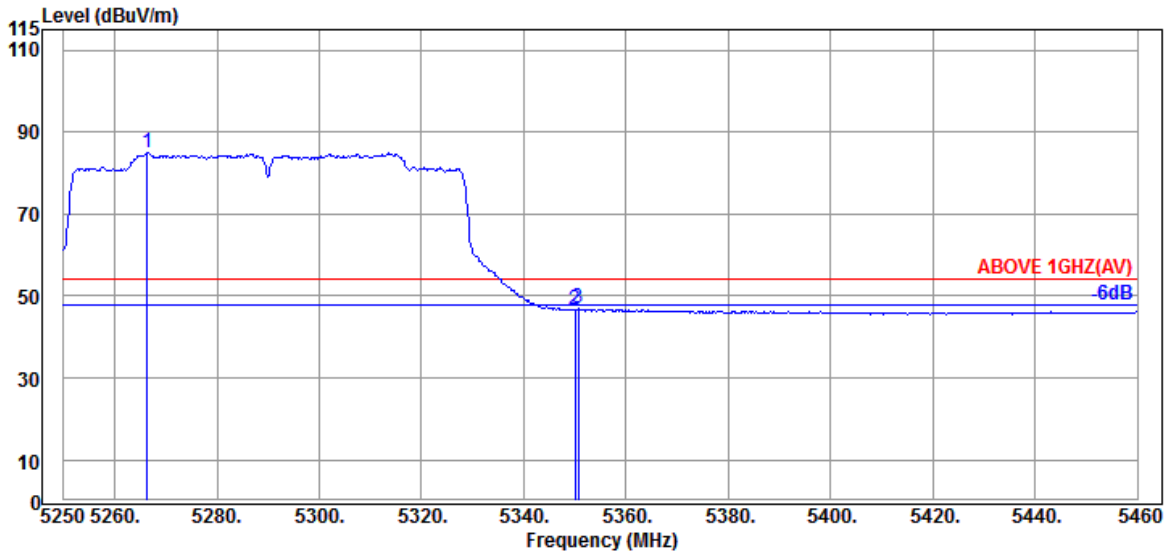


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.380	33.90	8.95	39.28	81.37	84.94	---	---	Average
5349.960	33.90	8.99	39.27	42.92	46.54	54.00	7.46	Average
5350.590	33.90	8.99	39.27	43.31	46.93	54.00	7.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

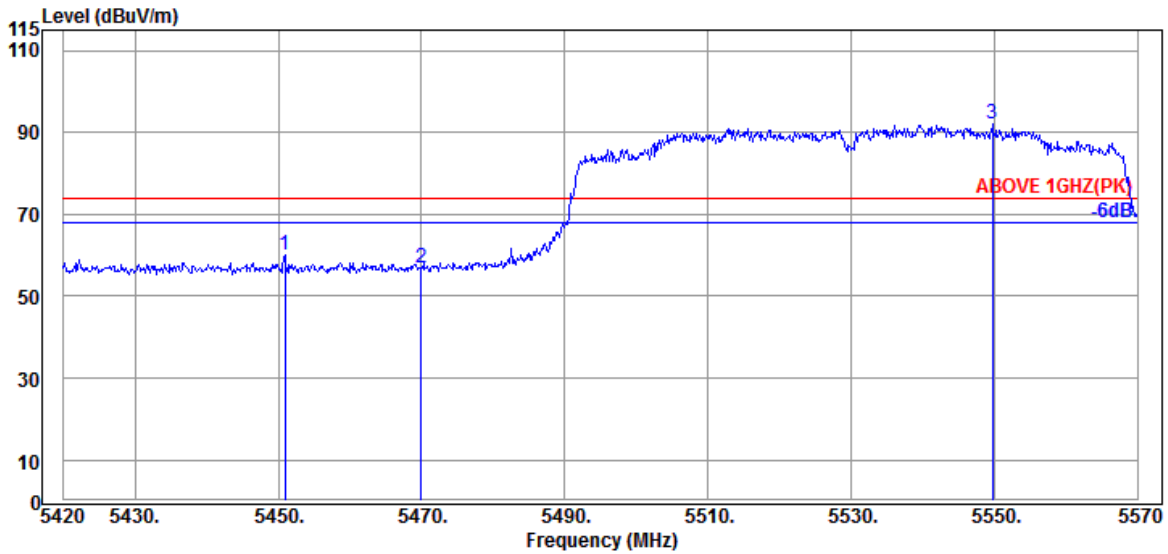

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.900	34.20	9.05	39.26	55.94	59.93	74.00	14.07	Peak
5469.950	34.17	9.06	39.26	53.09	57.06	74.00	16.94	Peak
@ 5549.750	34.10	9.10	39.27	88.01	91.94	---	---	Peak

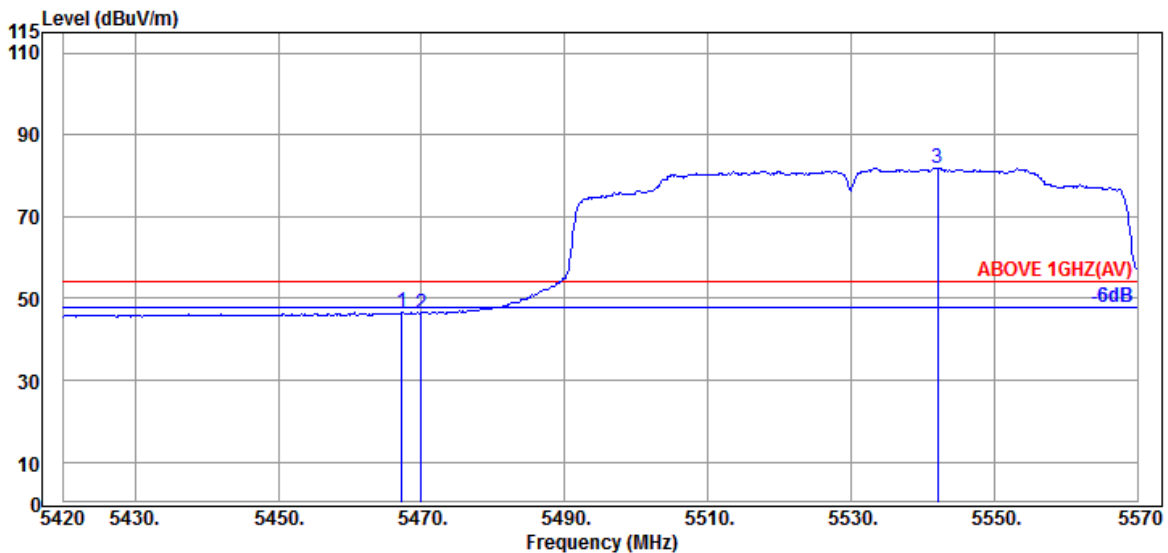


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.17	9.06	39.26	42.66	46.63	54.00	7.37	Average
5469.950	34.17	9.06	39.26	42.33	46.30	54.00	7.70	Average
@ 5542.100	34.10	9.09	39.27	78.02	81.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

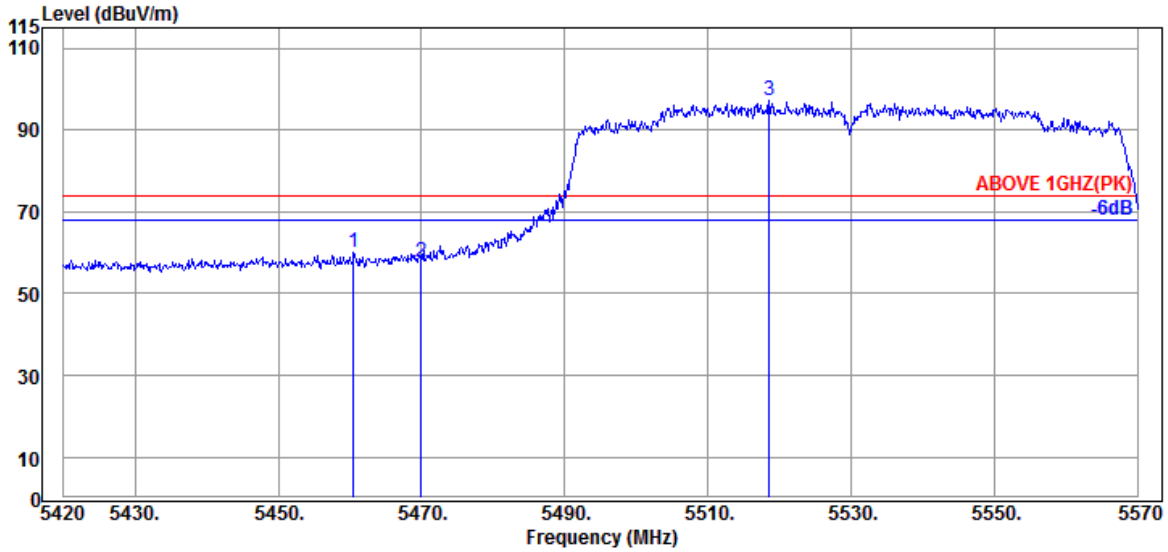

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.20	9.05	39.26	56.25	60.24	74.00	13.76	Peak
5469.950	34.17	9.06	39.26	53.69	57.66	74.00	16.34	Peak
@ 5518.550	34.10	9.09	39.26	93.12	97.05	---	---	Peak

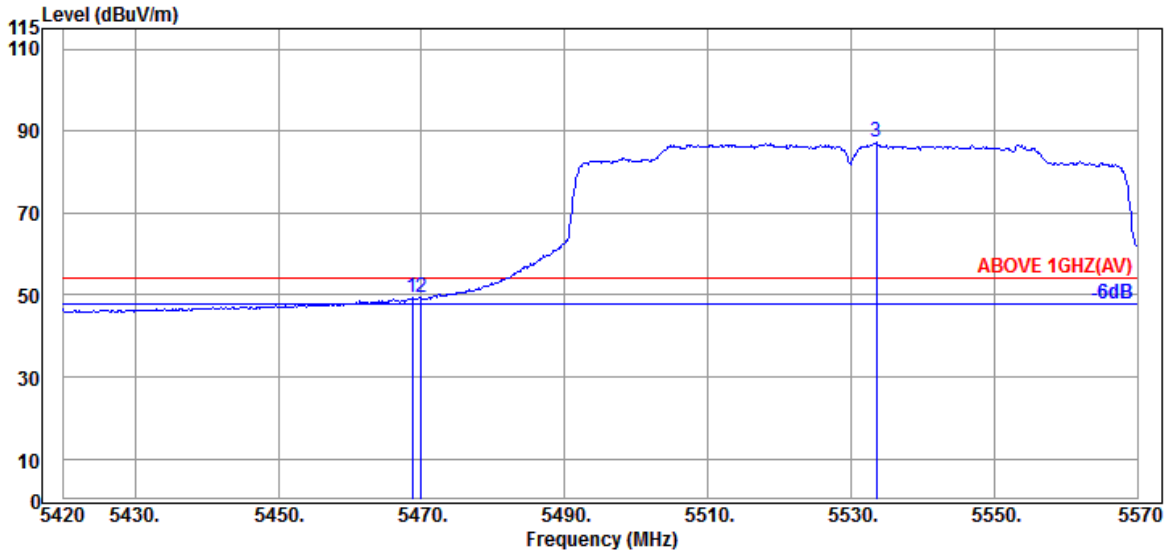


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.17	9.06	39.26	45.24	49.21	54.00	4.79	Average
5469.950	34.17	9.06	39.26	45.26	49.23	54.00	4.77	Average
@ 5533.550	34.10	9.09	39.27	83.39	87.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

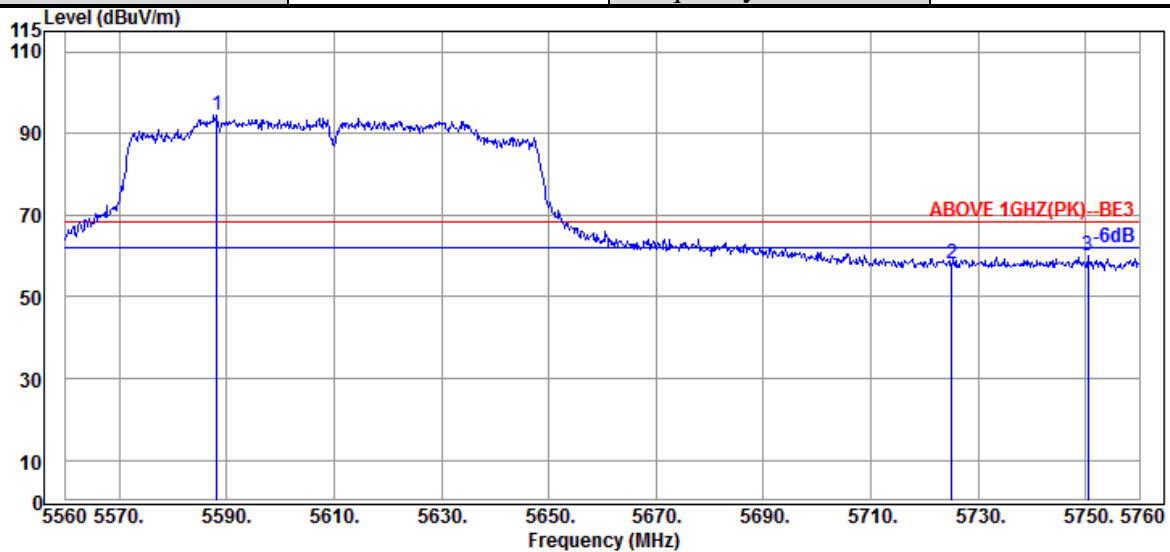

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.200	34.03	9.12	39.28	90.50	94.37	---	---	Peak
5725.000	33.80	9.20	39.30	54.36	58.06	68.20	10.14	Peak
5750.400	33.80	9.20	39.31	56.27	59.96	68.20	8.24	Peak

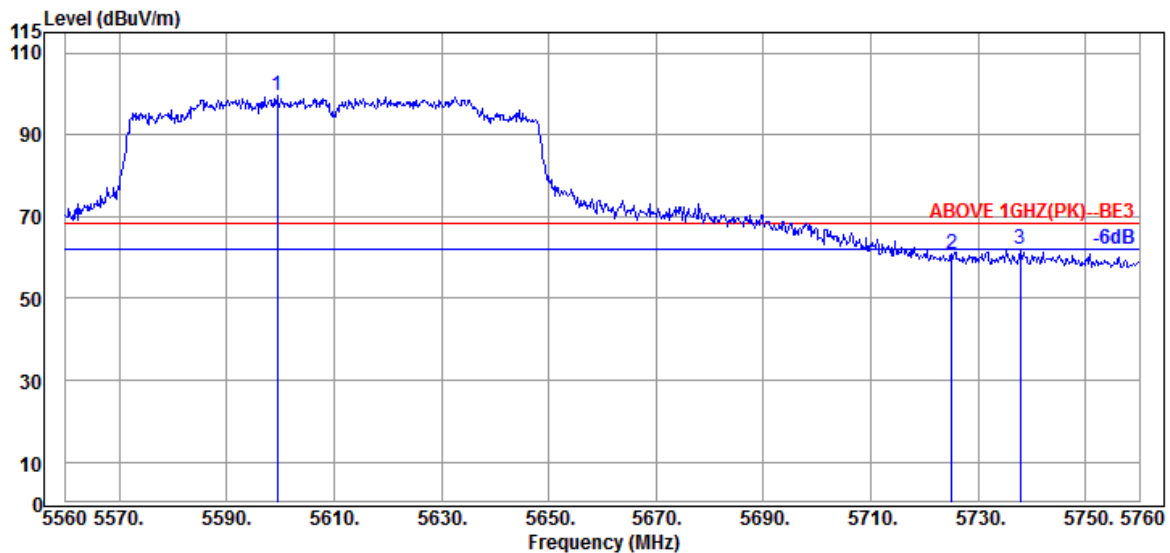


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.400	34.00	9.13	39.28	95.75	99.60	---	---	Peak
5725.000	33.80	9.20	39.30	57.04	60.74	68.20	7.46	Peak
5737.800	33.80	9.20	39.31	58.21	61.90	68.20	6.30	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

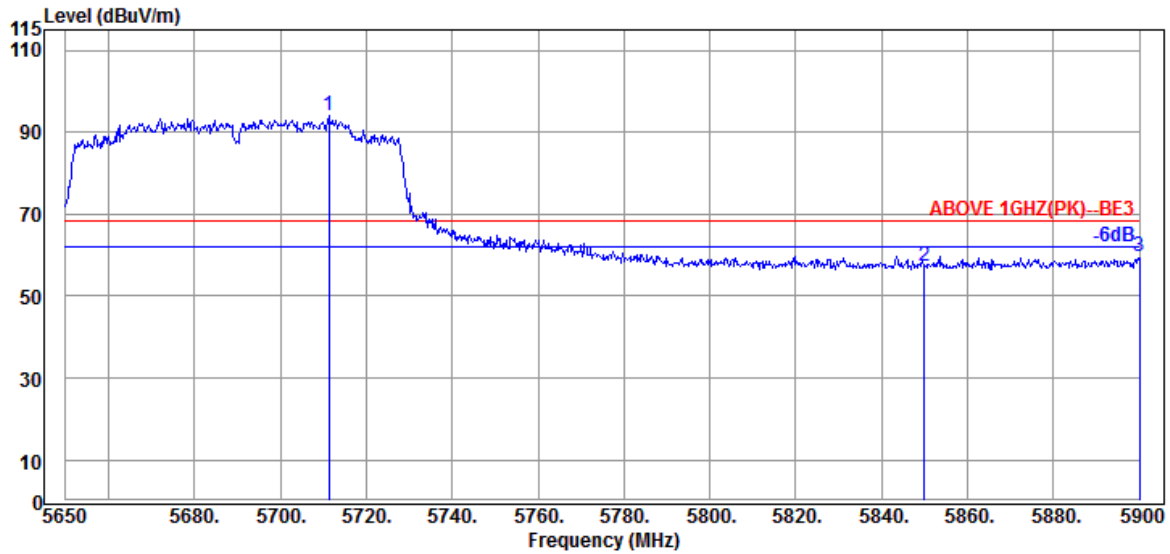

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5711.250	33.80	9.19	39.30	90.23	93.92	---	---	Peak
5850.000	34.10	9.25	39.33	53.09	57.11	68.20	11.09	Peak
5900.000	34.10	9.28	39.34	55.65	59.69	68.20	8.51	Peak

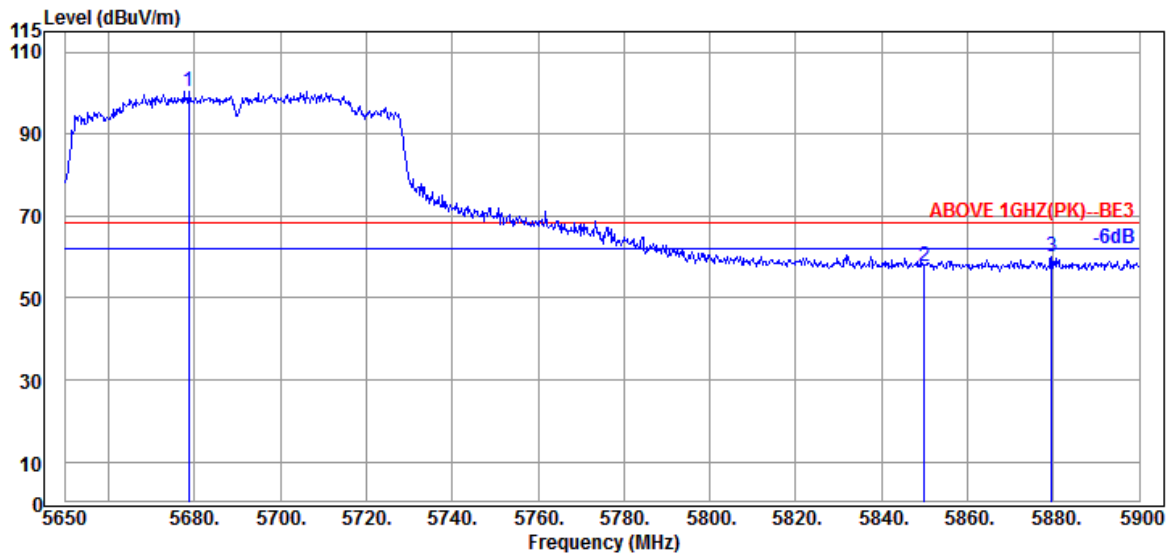


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5678.750	33.87	9.17	39.30	96.65	100.39	---	---	Peak
5850.000	34.10	9.25	39.33	53.84	57.86	68.20	10.34	Peak
5879.500	34.10	9.27	39.34	56.07	60.10	68.20	8.10	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

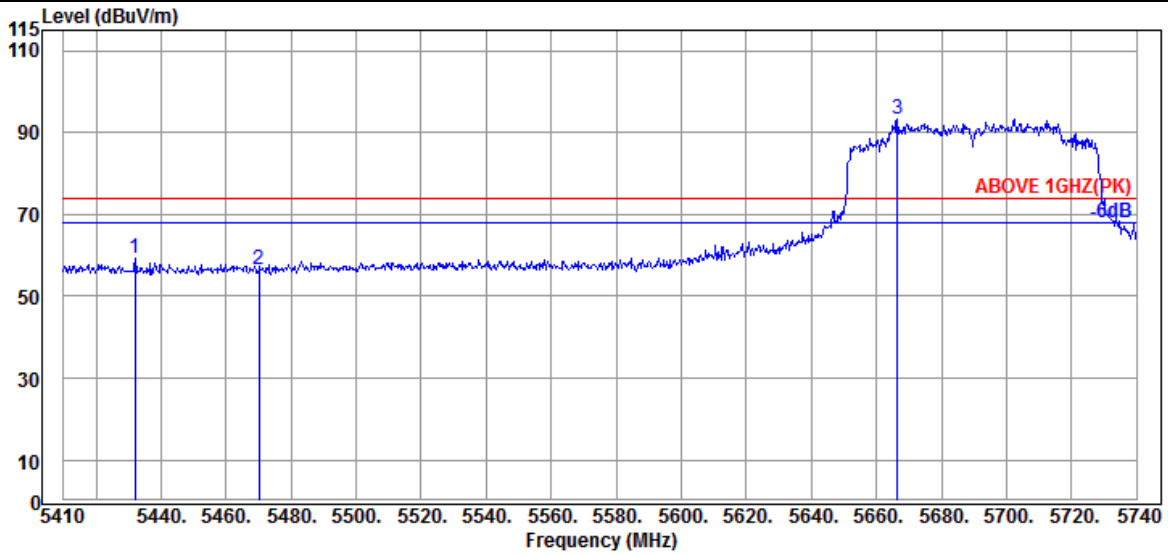

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.110	34.17	9.04	39.27	55.17	59.11	74.00	14.89	Peak
5470.060	34.17	9.06	39.26	52.49	56.46	74.00	17.54	Peak
@ 5666.410	33.93	9.16	39.29	89.42	93.22	---	---	Peak

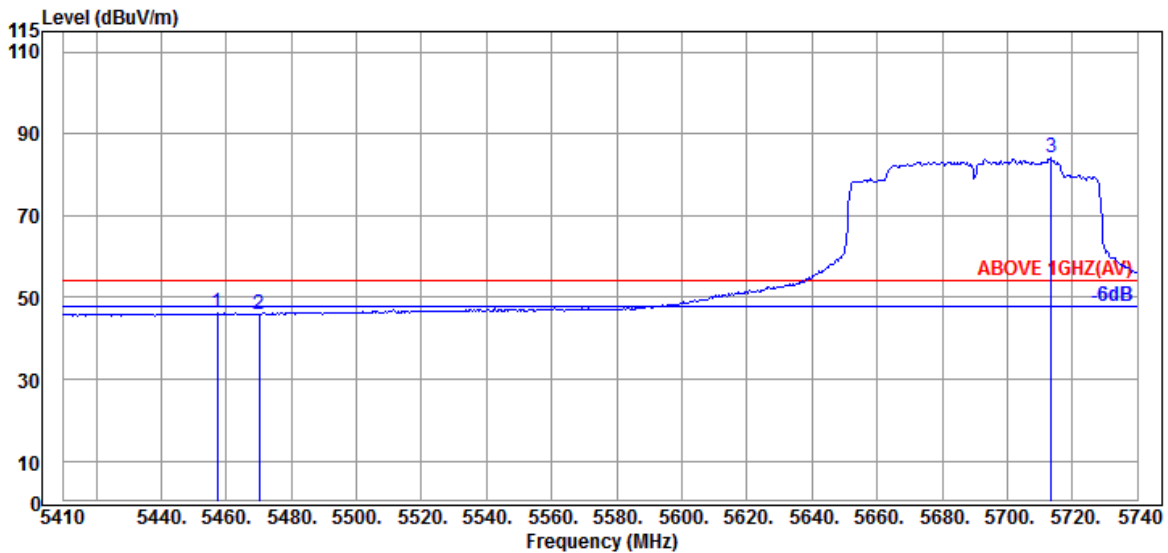


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.20	9.05	39.26	42.16	46.15	54.00	7.85	Average
5470.060	34.17	9.06	39.26	42.03	46.00	54.00	8.00	Average
@ 5713.600	33.80	9.19	39.30	80.35	84.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

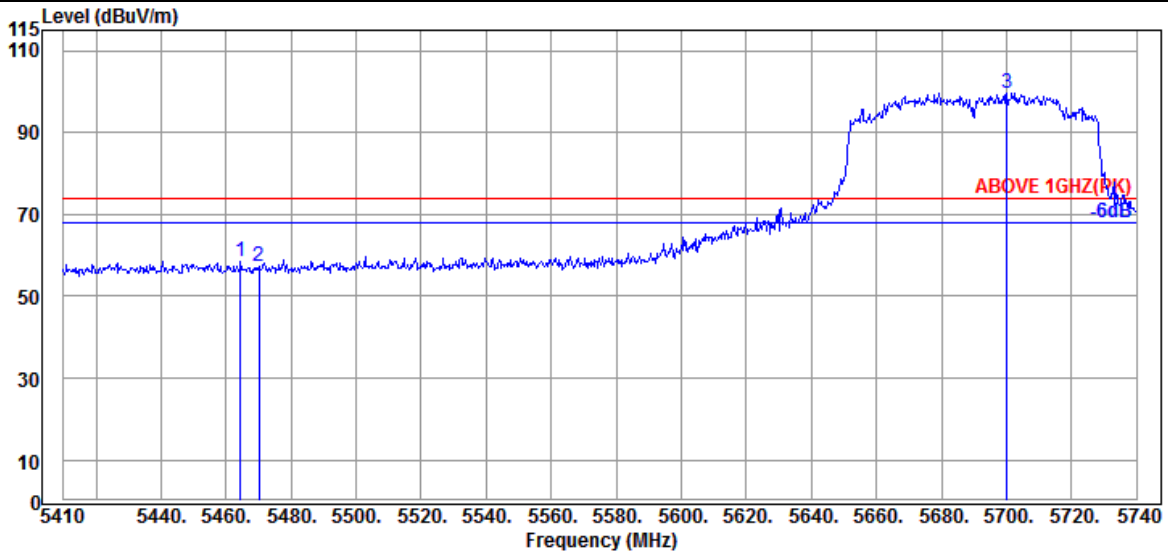

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.17	9.06	39.26	54.70	58.67	74.00	15.33	Peak
5470.060	34.17	9.06	39.26	53.40	57.37	74.00	16.63	Peak
@ 5700.070	33.80	9.18	39.30	96.03	99.71	---	---	Peak

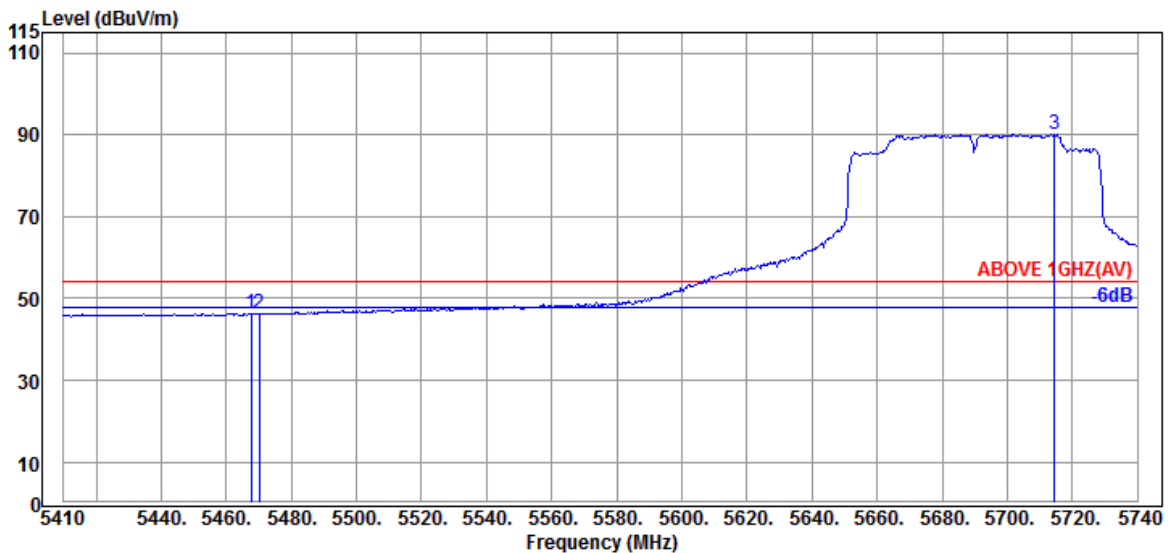


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.17	9.06	39.26	42.33	46.30	54.00	7.70	Average
5470.060	34.17	9.06	39.26	42.11	46.08	54.00	7.92	Average
@ 5714.590	33.80	9.19	39.30	86.42	90.11	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

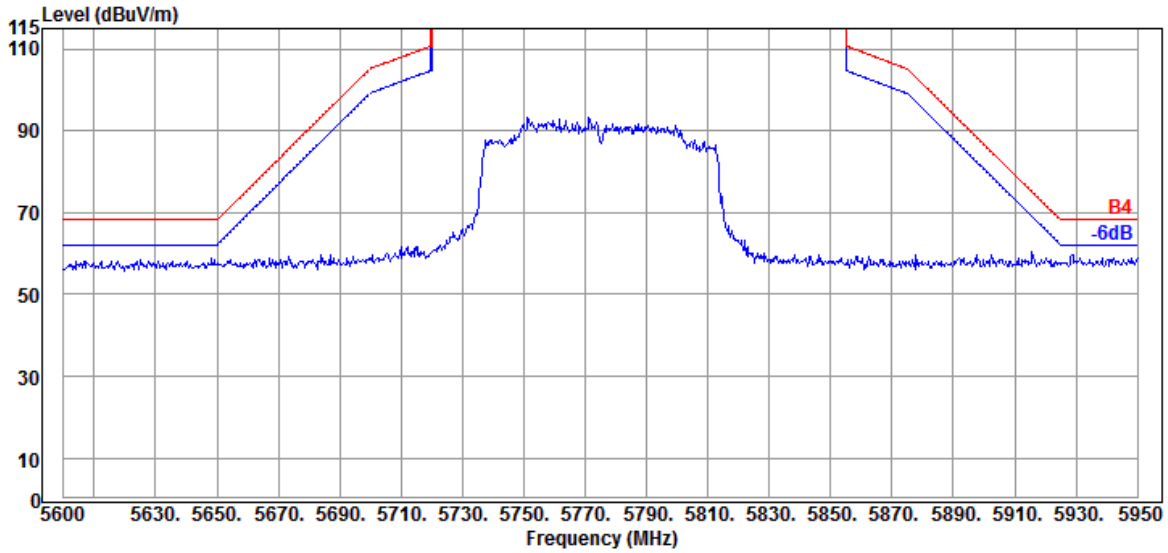

Antenna at Vertical Polarization

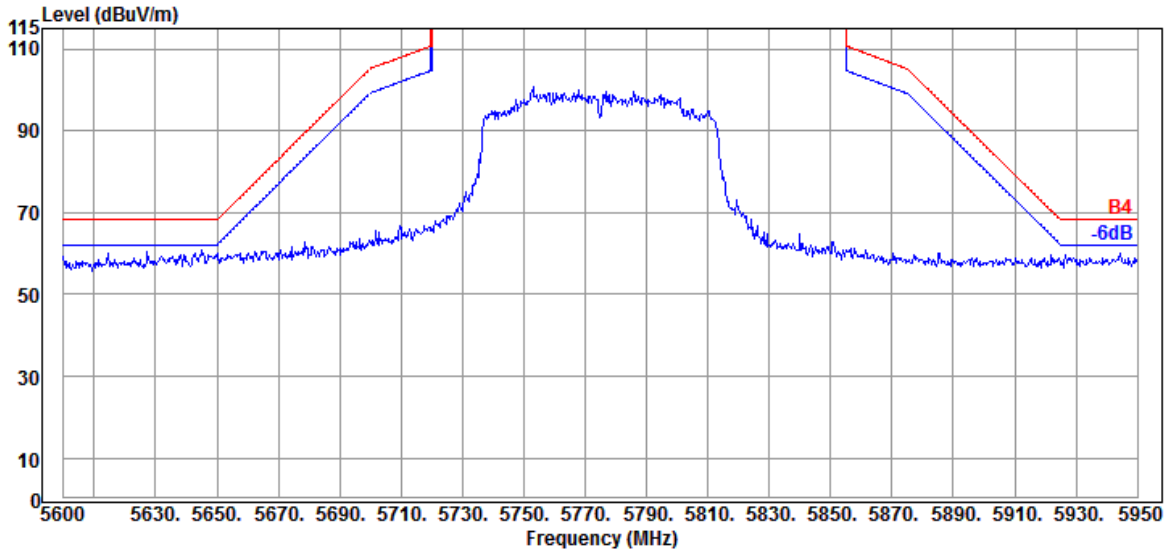


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

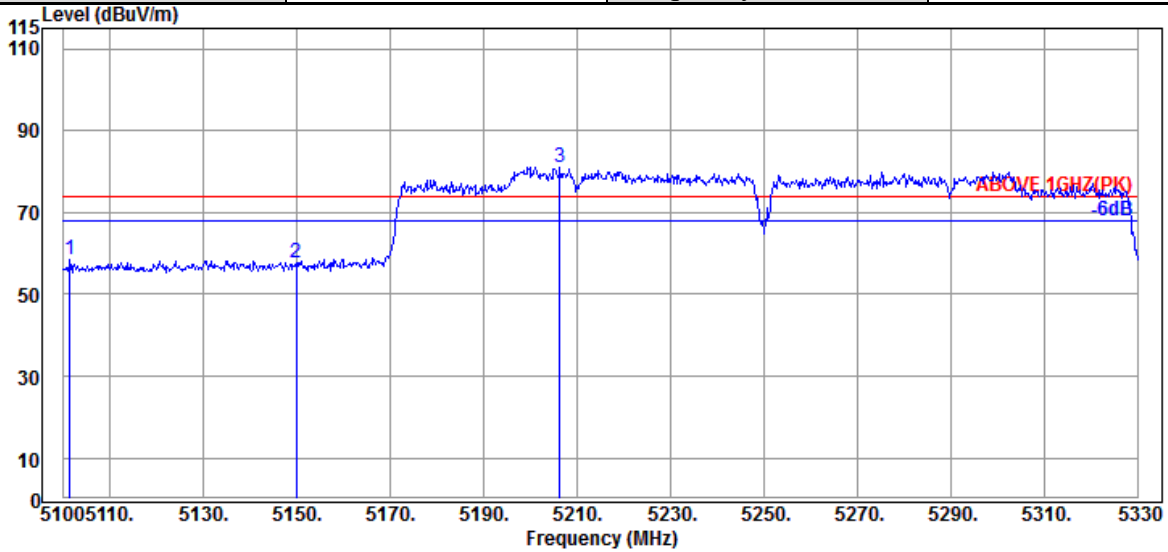

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.380	33.70	8.86	39.29	55.27	58.54	74.00	15.46	Peak
5149.910	33.70	8.88	39.29	54.33	57.62	74.00	16.38	Peak
@ 5206.260	33.72	8.92	39.28	77.85	81.21	---	---	Peak

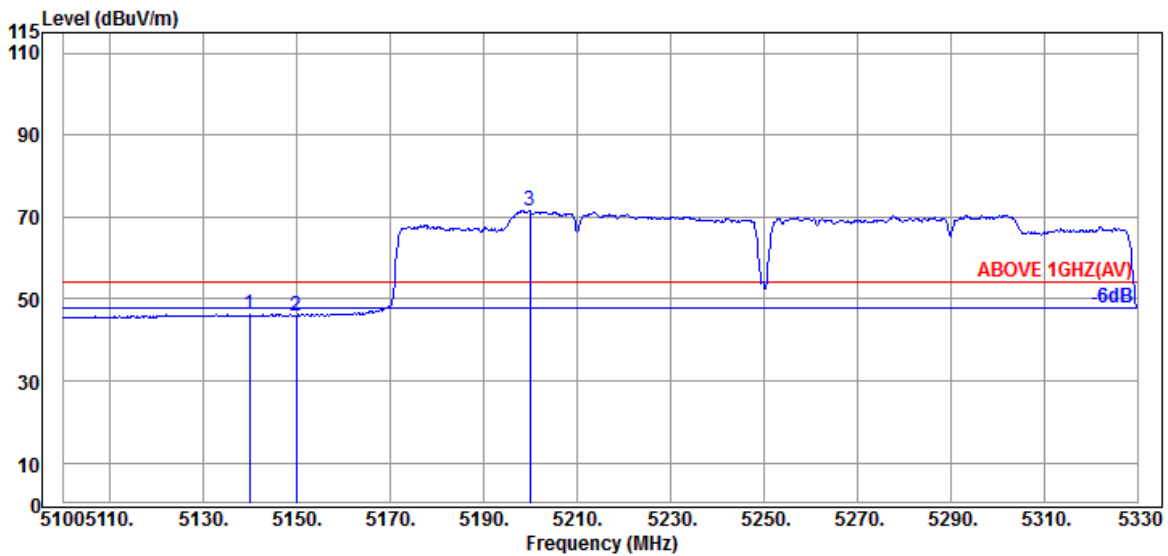


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.790	33.70	8.88	39.29	42.89	46.18	54.00	7.82	Average
5149.910	33.70	8.88	39.29	42.73	46.02	54.00	7.98	Average
@ 5199.820	33.70	8.91	39.28	68.20	71.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

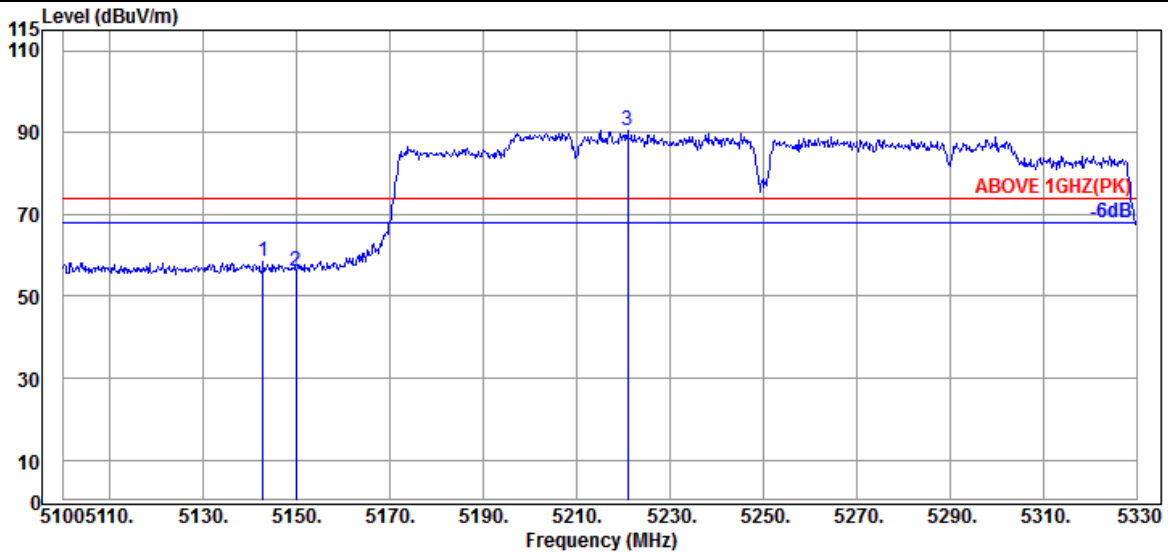

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.780	33.70	8.88	39.29	55.15	58.44	74.00	15.56	Peak
5149.910	33.70	8.88	39.29	52.85	56.14	74.00	17.86	Peak
@ 5220.980	33.75	8.93	39.28	87.13	90.53	---	---	Peak

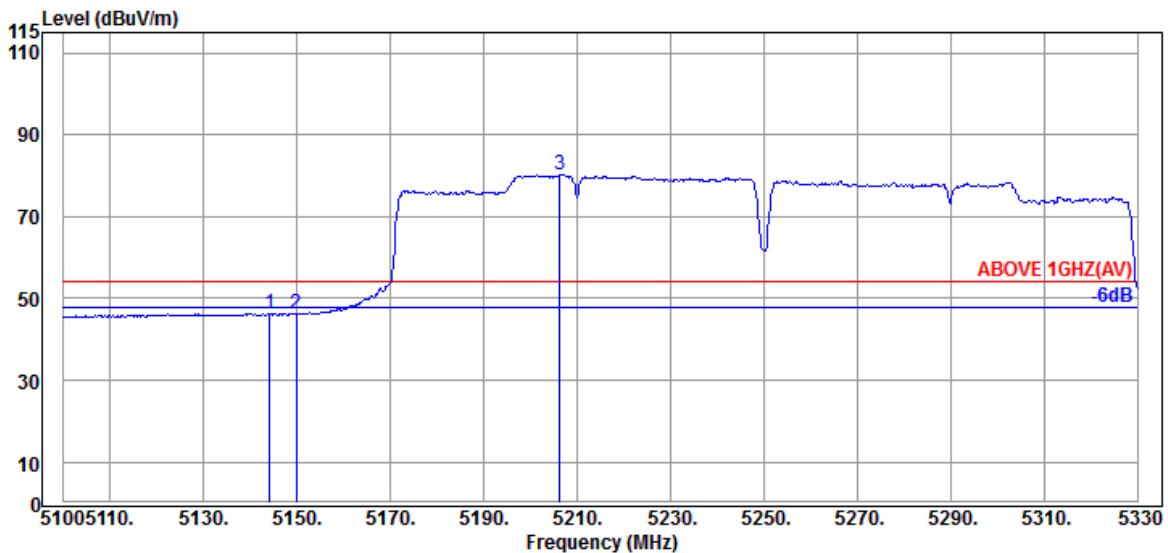


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.160	33.70	8.88	39.29	42.94	46.23	54.00	7.77	Average
5149.910	33.70	8.88	39.29	42.91	46.20	54.00	7.80	Average
@ 5206.260	33.72	8.92	39.28	77.05	80.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

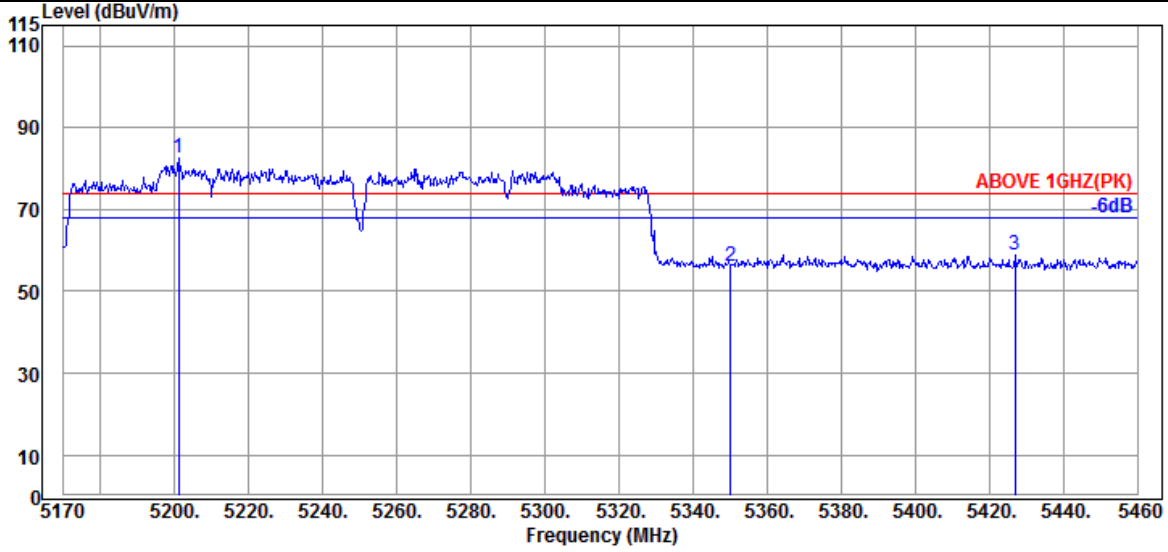

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.030	33.70	8.91	39.28	79.07	82.40	---	---	Peak
5350.090	33.90	8.99	39.27	52.61	56.23	74.00	17.77	Peak
5426.940	34.15	9.04	39.27	54.88	58.80	74.00	15.20	Peak

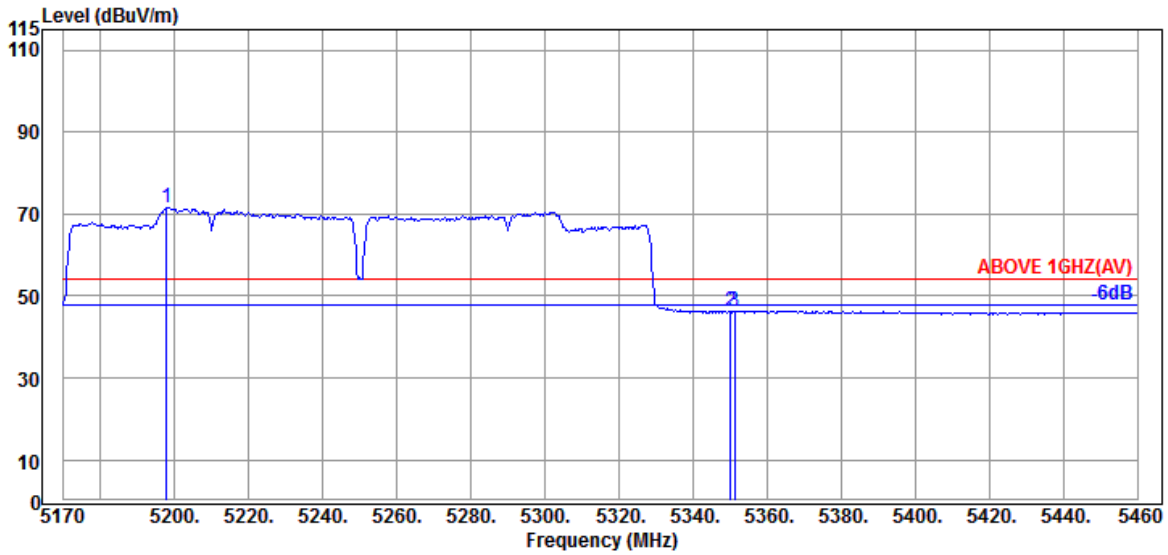


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	33.70	8.91	39.28	68.29	71.62	---	---	Average
5350.090	33.90	8.99	39.27	42.48	46.10	54.00	7.90	Average
5351.250	33.90	8.99	39.27	42.77	46.39	54.00	7.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

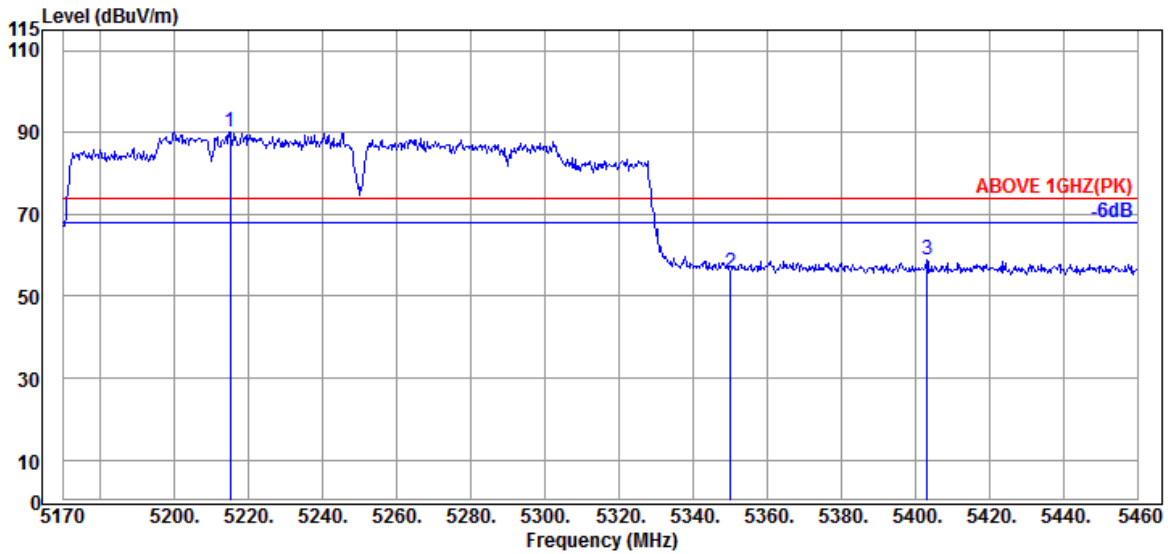

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5214.950	33.72	8.92	39.28	86.84	90.20	---	---	Peak
5350.090	33.90	8.99	39.27	52.28	55.90	74.00	18.10	Peak
5403.160	34.12	9.03	39.27	54.91	58.79	74.00	15.21	Peak

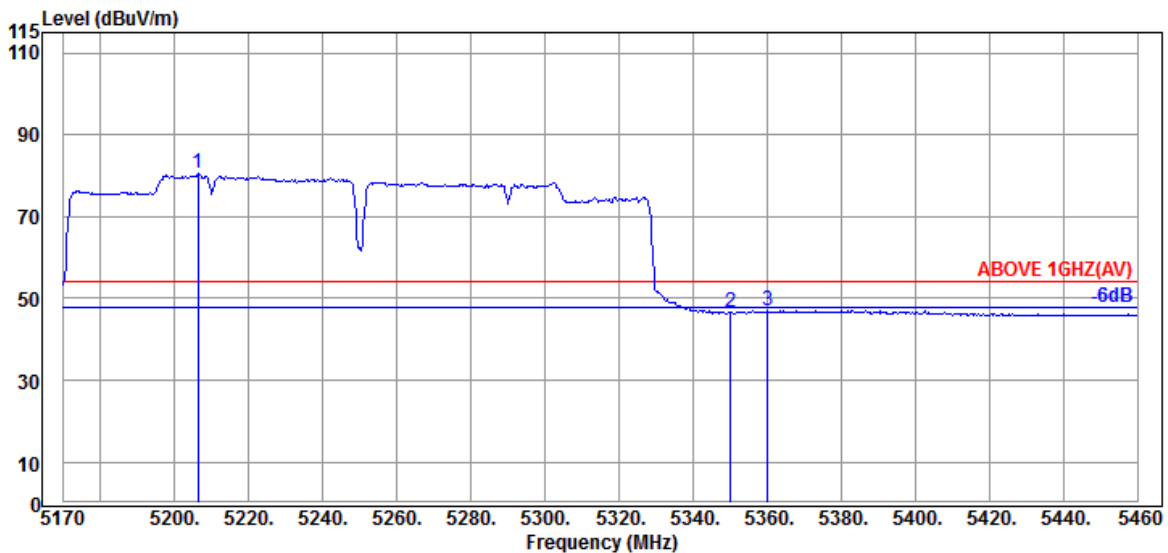


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.250	33.72	8.92	39.28	77.25	80.61	---	---	Average
5350.090	33.90	8.99	39.27	42.95	46.57	54.00	7.43	Average
5360.240	33.97	9.00	39.27	43.24	46.94	54.00	7.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

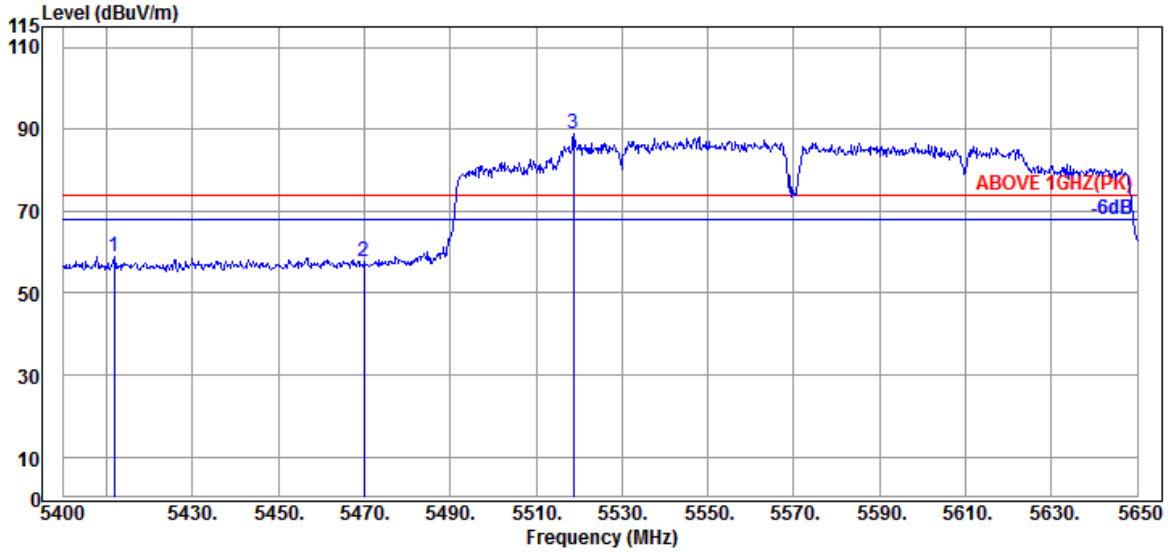

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.750	34.12	9.03	39.27	55.13	59.01	74.00	14.99	Peak
5470.000	34.17	9.06	39.26	53.66	57.63	74.00	16.37	Peak
@ 5518.750	34.10	9.09	39.26	85.13	89.06	---	---	Peak

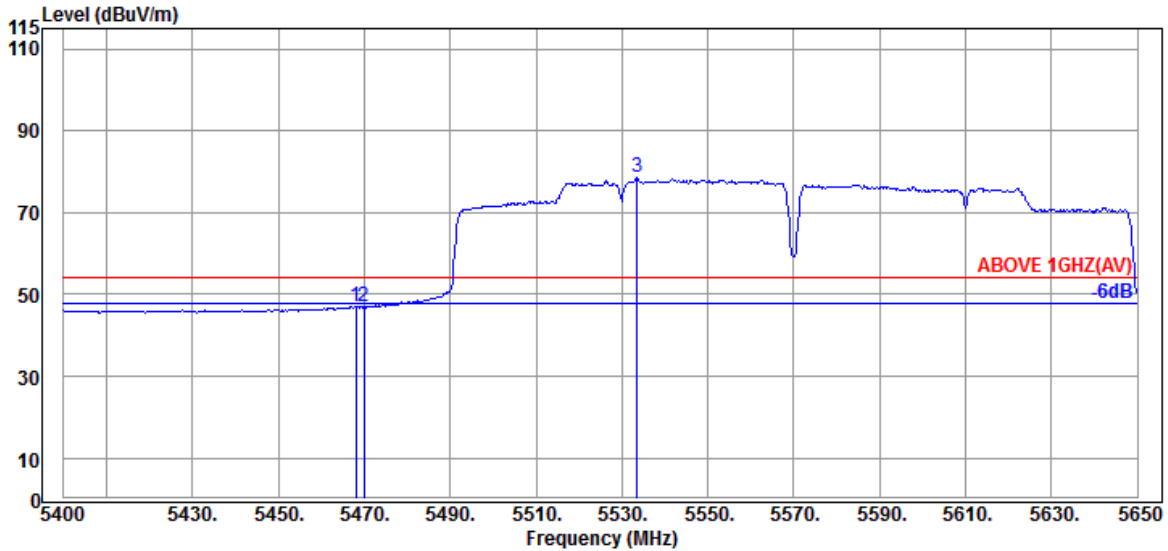


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	43.08	47.05	54.00	6.95	Average
5470.000	34.17	9.06	39.26	42.91	46.88	54.00	7.12	Average
@ 5533.500	34.10	9.09	39.27	74.53	78.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

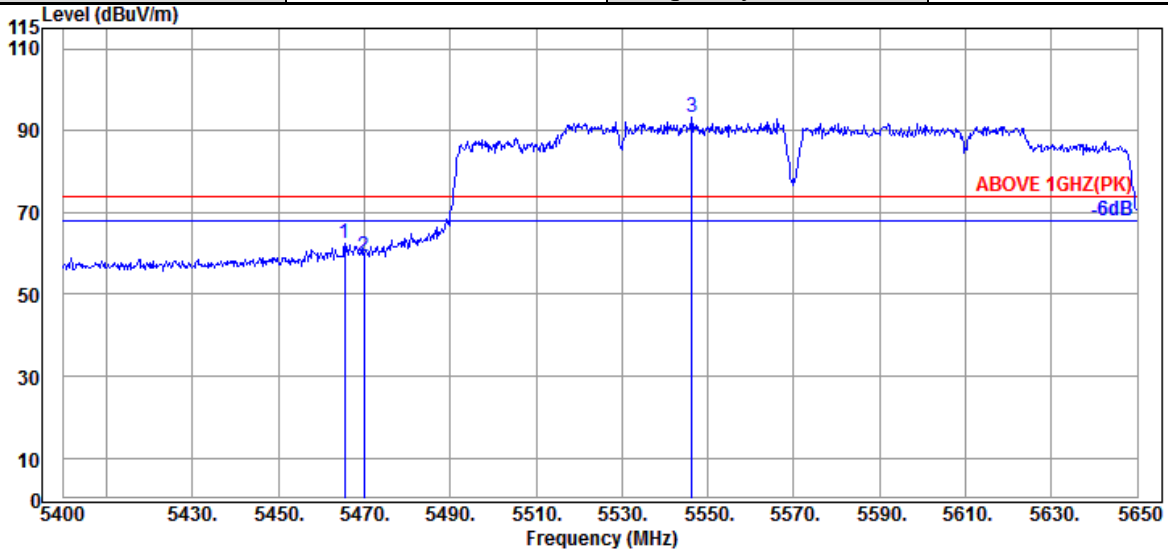

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	9.06	39.26	58.30	62.27	74.00	11.73	Peak
5470.000	34.17	9.06	39.26	55.33	59.30	74.00	14.70	Peak
@ 5546.250	34.10	9.10	39.27	89.42	93.35	---	---	Peak

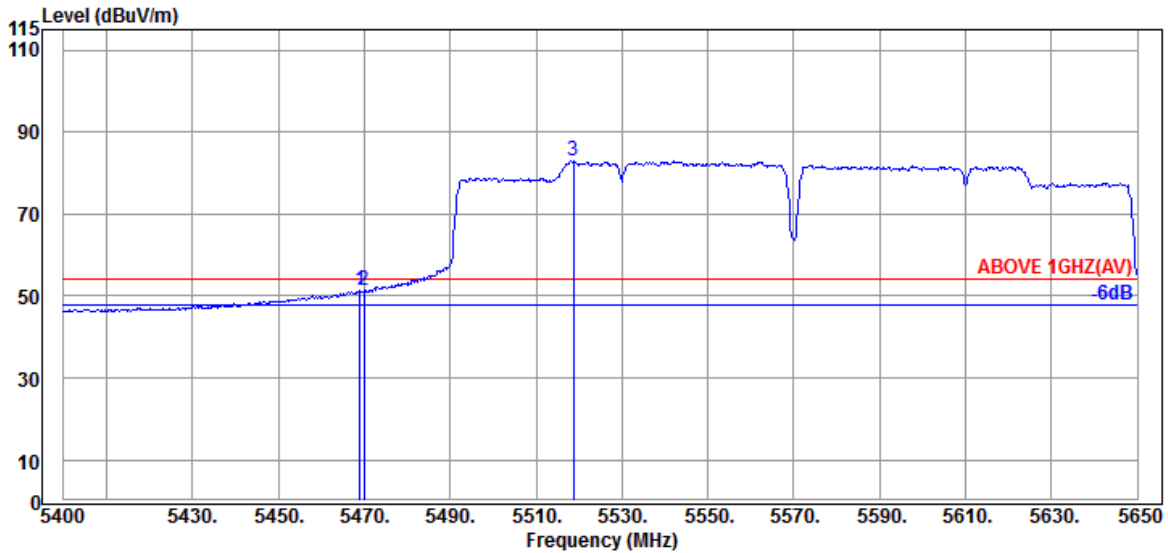


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	47.22	51.19	54.00	2.81	Average
5470.000	34.17	9.06	39.26	47.29	51.26	54.00	2.74	Average
@ 5518.750	34.10	9.09	39.26	78.88	82.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

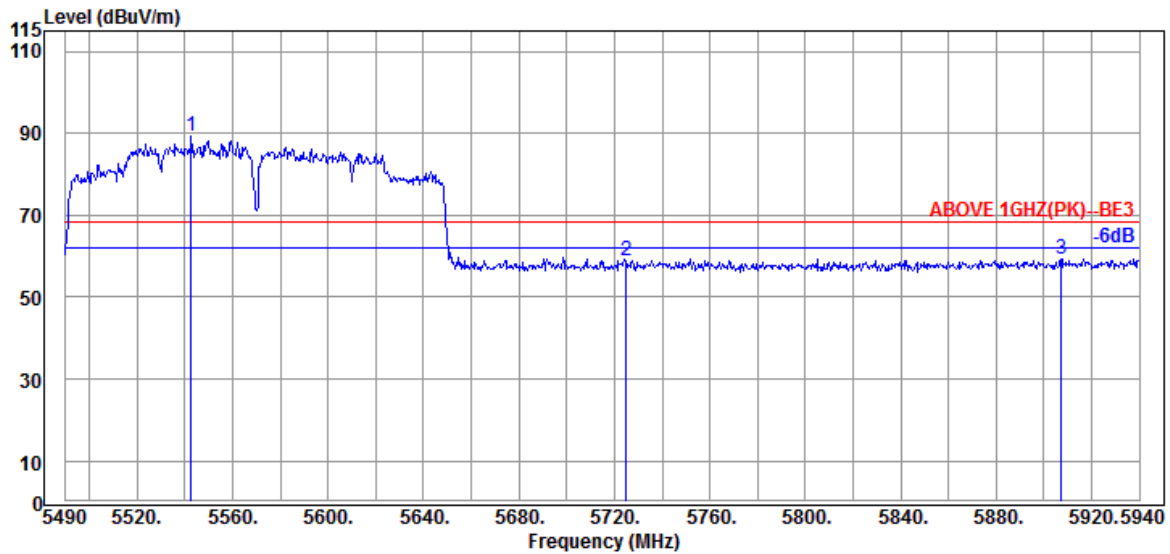

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5542.650	34.10	9.09	39.27	85.58	89.50	---	---	Peak
5724.900	33.80	9.20	39.30	55.17	58.87	68.20	9.33	Peak
5907.150	34.17	9.29	39.34	55.31	59.43	68.20	8.77	Peak

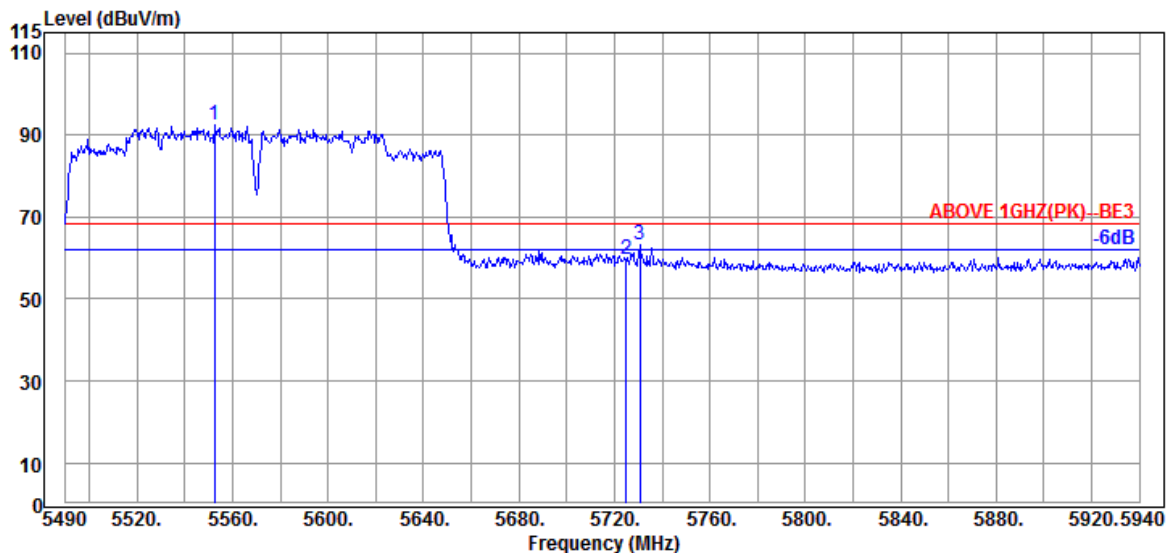


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5552.550	34.10	9.10	39.27	88.55	92.48	---	---	Peak
5724.900	33.80	9.20	39.30	55.87	59.57	68.20	8.63	Peak
5730.750	33.80	9.20	39.31	59.44	63.13	68.20	5.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

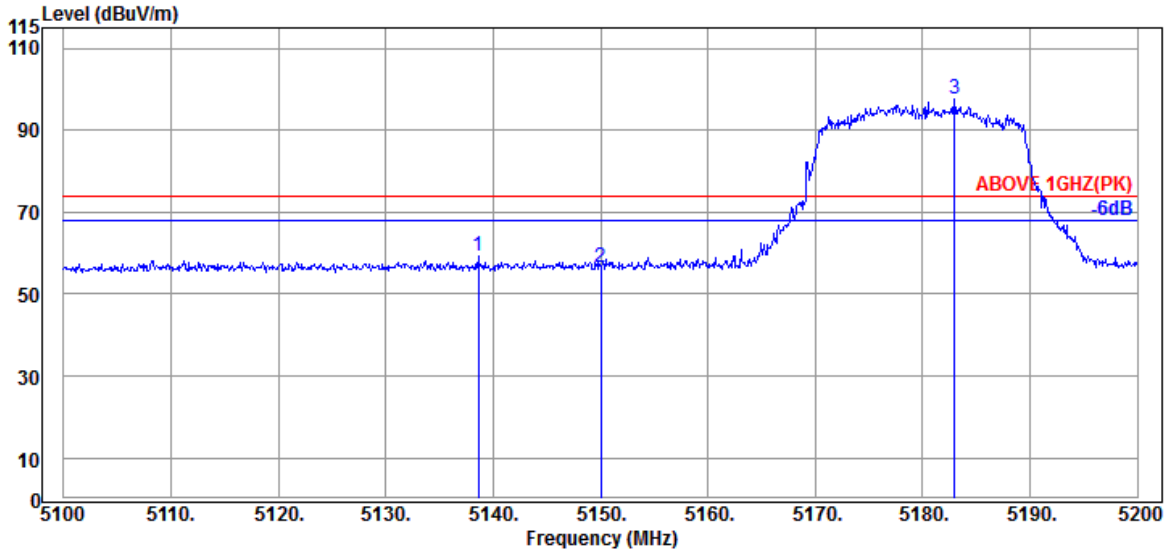

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.600	33.70	8.88	39.29	56.17	59.46	74.00	14.54	Peak
5150.000	33.70	8.88	39.29	53.26	56.55	74.00	17.45	Peak
@ 5183.000	33.70	8.90	39.28	94.35	97.67	---	---	Peak

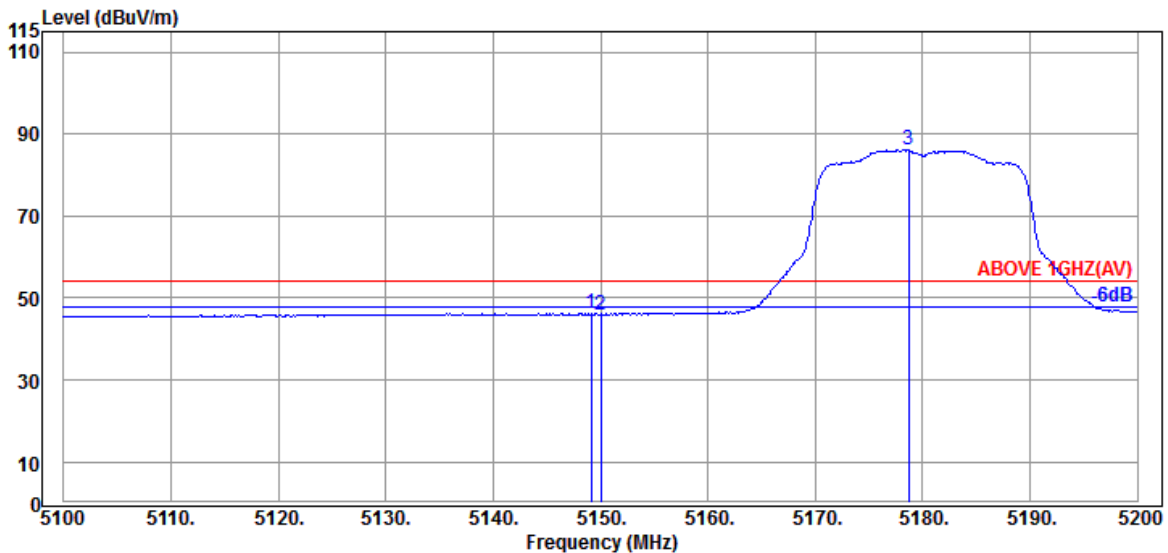


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.70	8.88	39.29	42.89	46.18	54.00	7.82	Average
5150.000	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5178.700	33.70	8.90	39.28	82.76	86.08	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

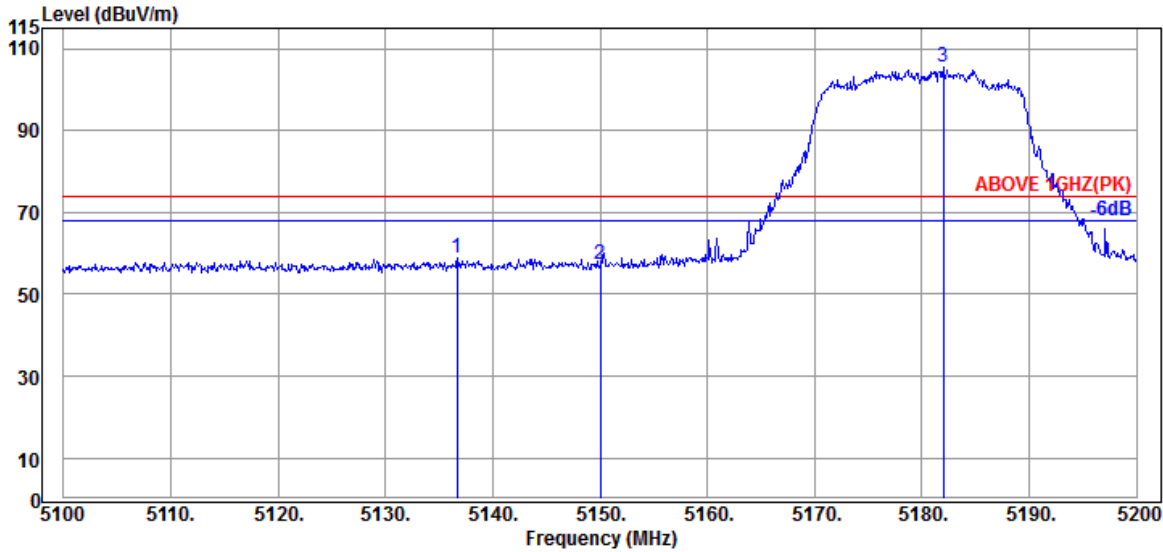

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.700	33.70	8.88	39.29	55.59	58.88	74.00	15.12	Peak
5150.000	33.70	8.88	39.29	54.01	57.30	74.00	16.70	Peak
@ 5182.000	33.70	8.90	39.28	102.12	105.44	---	---	Peak

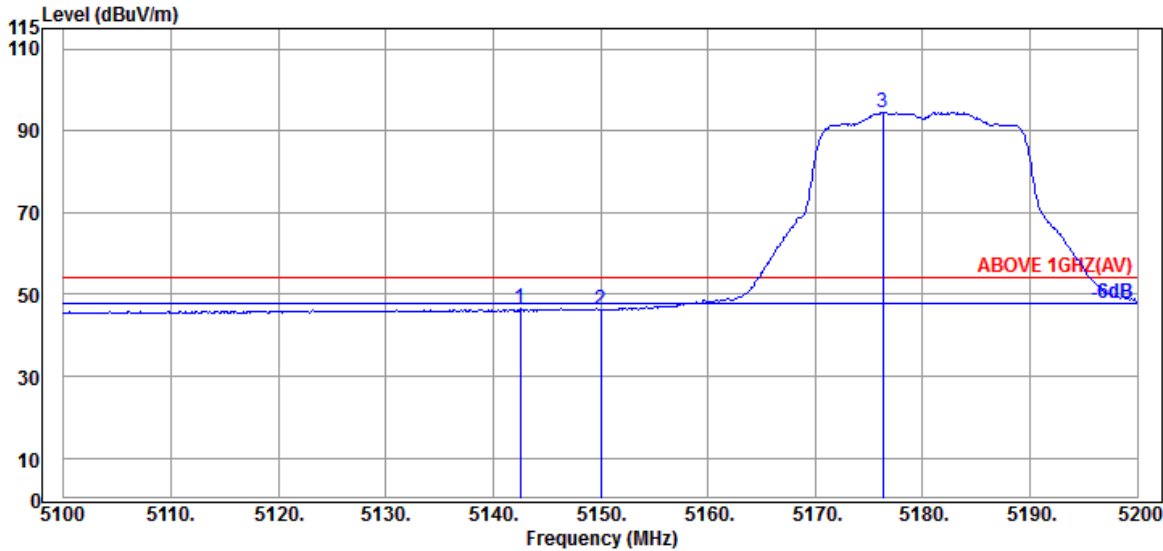


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.70	8.88	39.29	43.17	46.46	54.00	7.54	Average
5150.000	33.70	8.88	39.29	43.02	46.31	54.00	7.69	Average
@ 5176.300	33.70	8.90	39.28	91.17	94.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

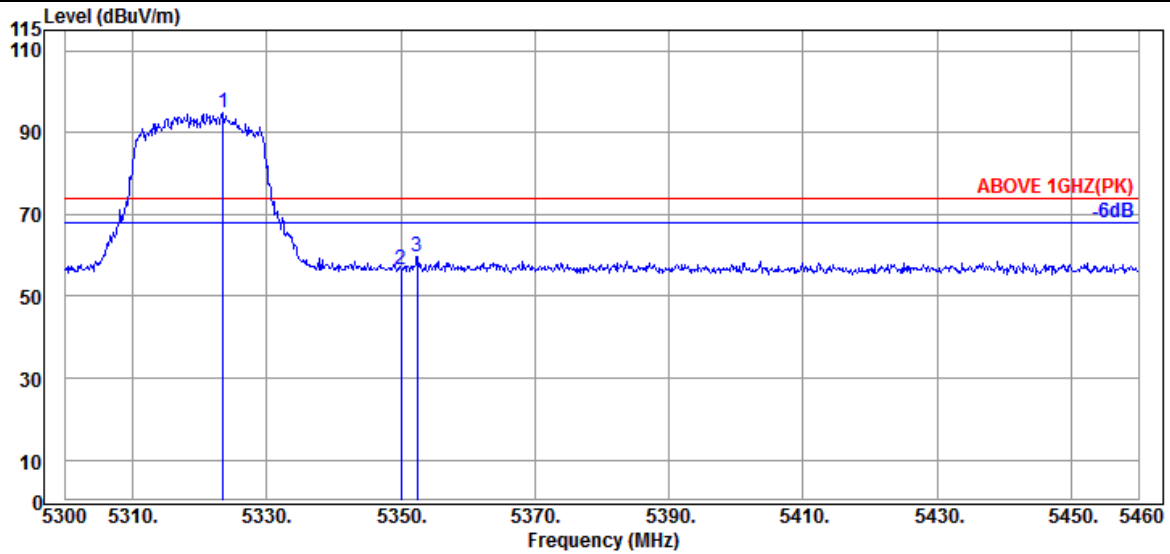

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5323.520	33.97	8.99	39.27	91.02	94.71	---	---	Peak
5350.080	33.90	8.99	39.27	52.96	56.58	74.00	17.42	Peak
5352.480	33.90	8.99	39.27	55.99	59.61	74.00	14.39	Peak

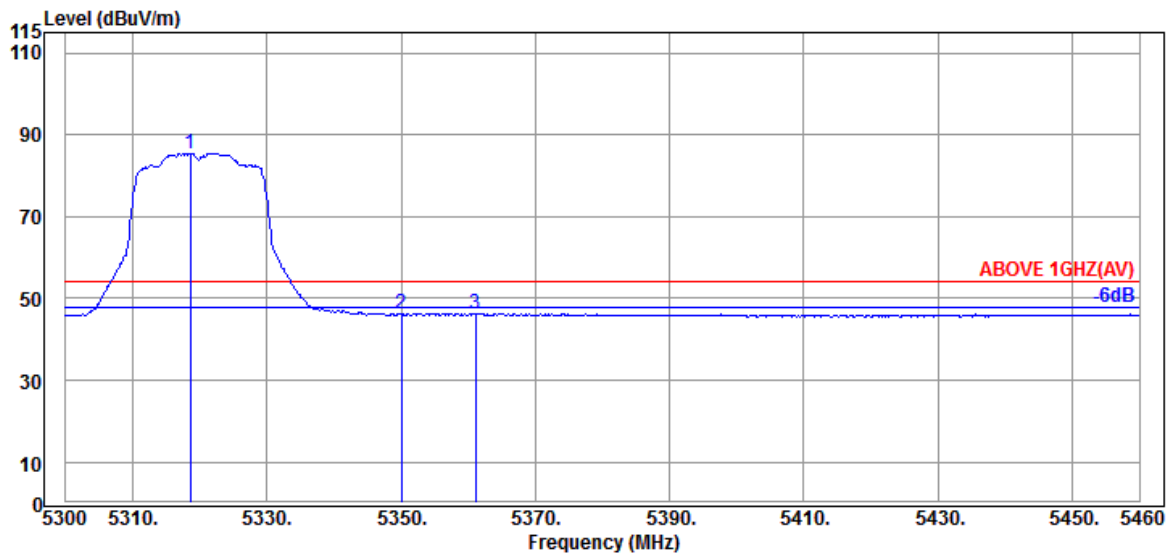


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.560	34.03	8.98	39.27	81.81	85.55	---	---	Average
5350.080	33.90	8.99	39.27	42.46	46.08	54.00	7.92	Average
5361.120	33.97	9.00	39.27	42.59	46.29	54.00	7.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

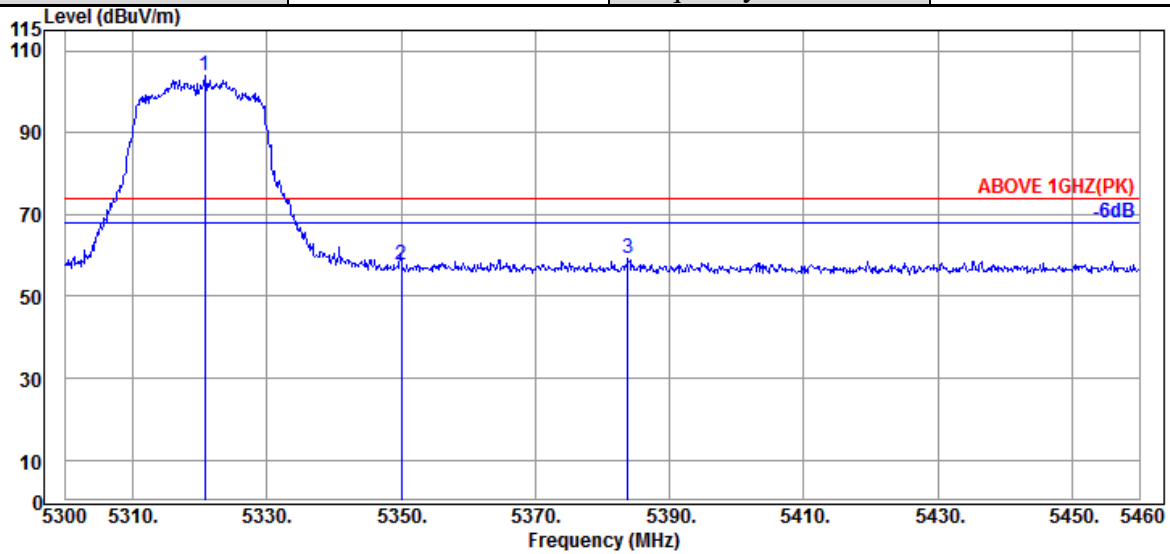

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.800	34.03	8.98	39.27	100.35	104.09	---	---	Peak
5350.080	33.90	8.99	39.27	54.11	57.73	74.00	16.27	Peak
5383.840	34.03	9.01	39.27	55.43	59.20	74.00	14.80	Peak

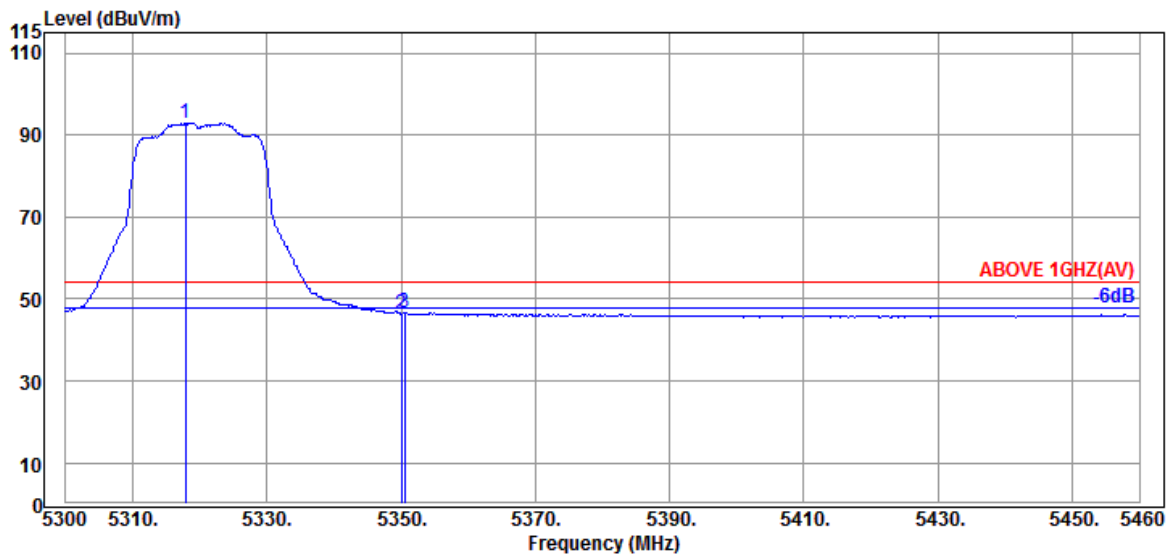


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	34.03	8.98	39.27	89.10	92.84	---	---	Average
5350.080	33.90	8.99	39.27	42.81	46.43	54.00	7.57	Average
5350.560	33.90	8.99	39.27	43.02	46.64	54.00	7.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

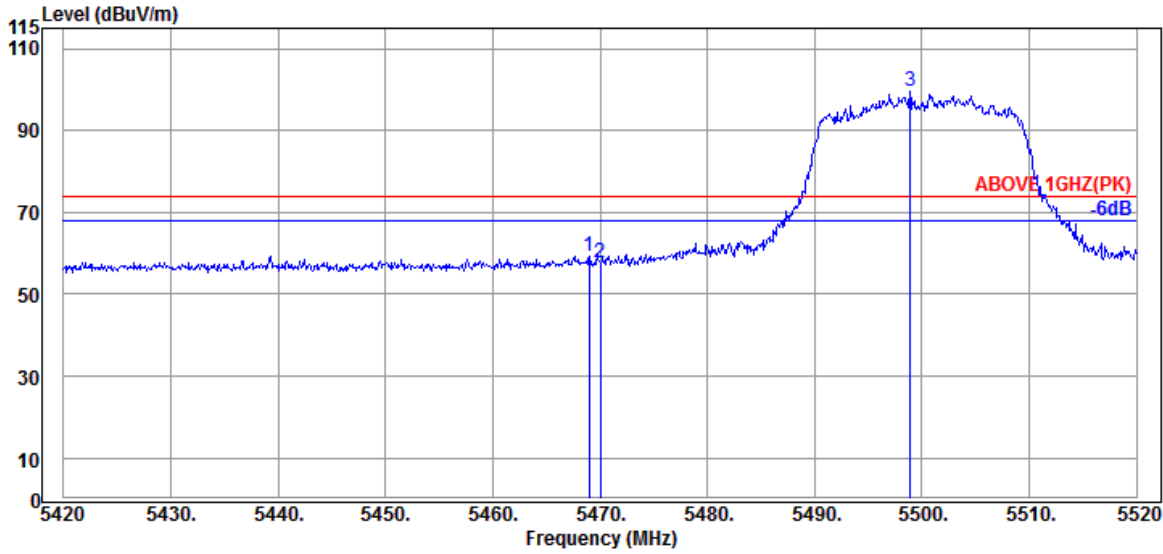

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	55.45	59.42	74.00	14.58	Peak
5470.000	34.17	9.06	39.26	53.63	57.60	74.00	16.40	Peak
@ 5498.900	34.10	9.08	39.26	95.73	99.65	---	---	Peak

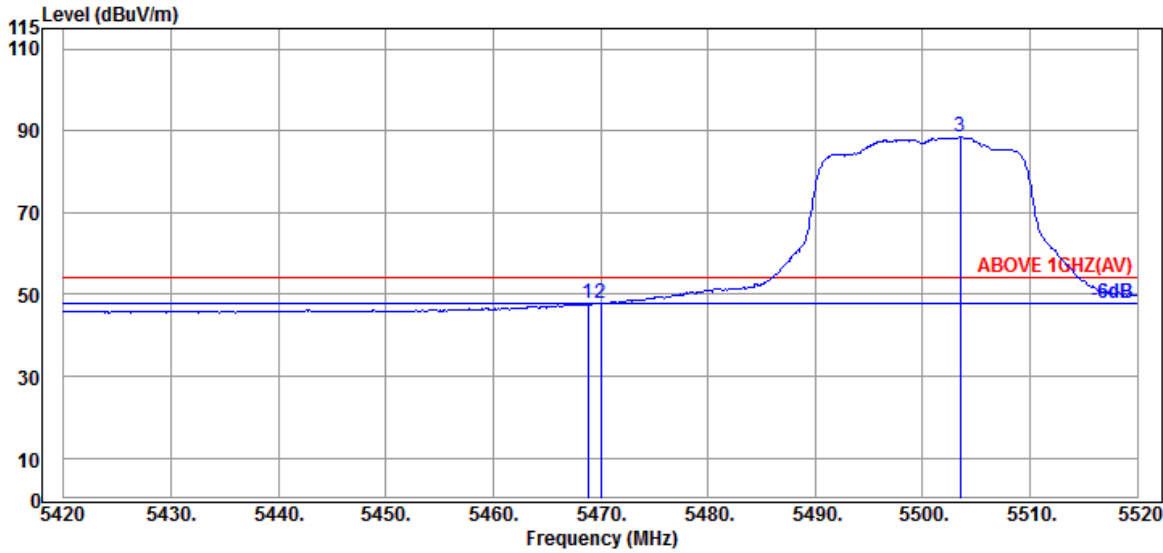


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.17	9.06	39.26	43.75	47.72	54.00	6.28	Average
5470.000	34.17	9.06	39.26	43.71	47.68	54.00	6.32	Average
@ 5503.500	34.10	9.08	39.26	84.69	88.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

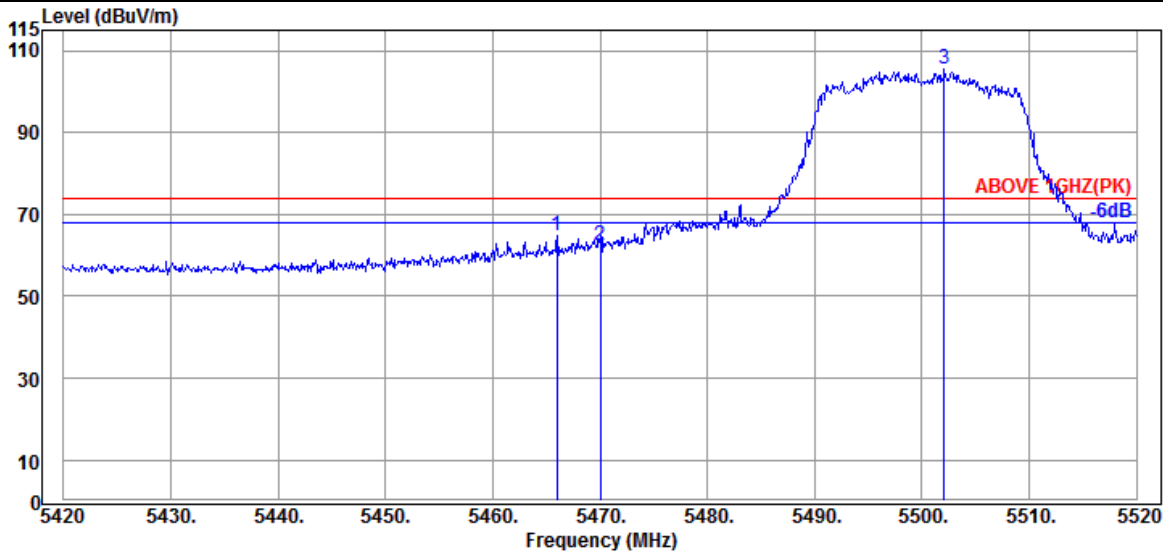

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.17	9.06	39.26	61.03	65.00	74.00	9.00	Peak
5470.000	34.17	9.06	39.26	58.45	62.42	74.00	11.58	Peak
@ 5502.100	34.10	9.08	39.26	101.46	105.38	---	---	Peak

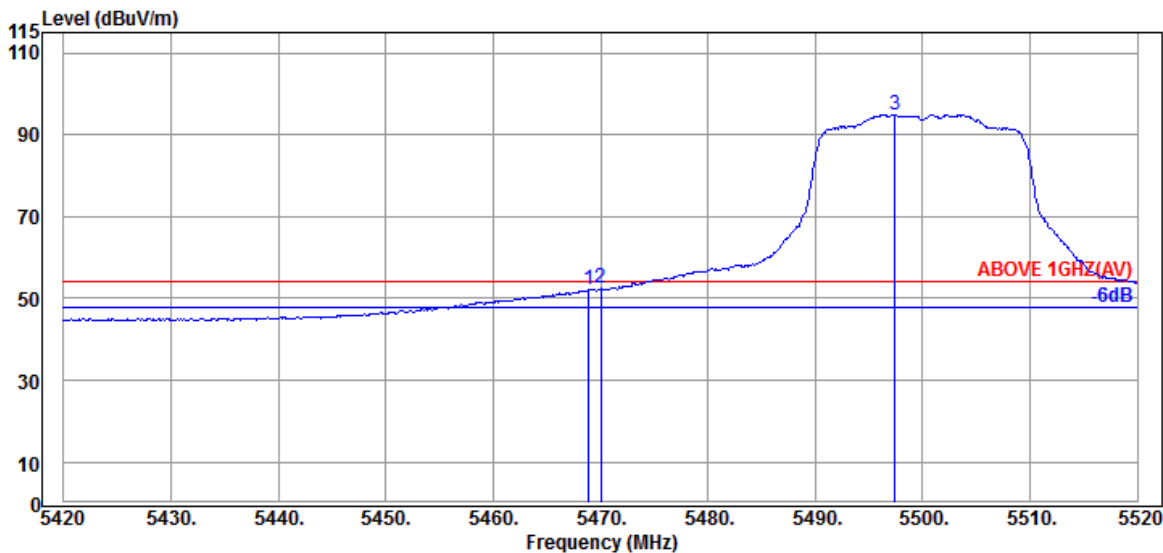


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	48.06	52.03	54.00	1.97	Average
5470.000	34.17	9.06	39.26	48.53	52.50	54.00	1.50	Average
@ 5497.400	34.10	9.08	39.26	91.01	94.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

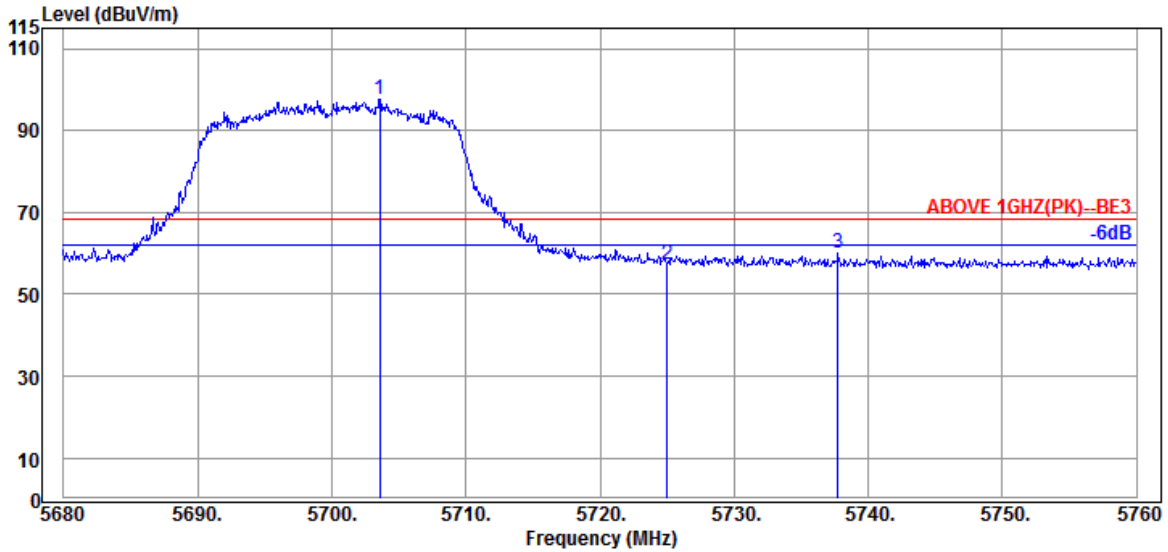

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5703.600	33.80	9.18	39.30	94.00	97.68	---	---	Peak
5725.040	33.80	9.20	39.30	53.70	57.40	68.20	10.80	Peak
5737.760	33.80	9.20	39.31	56.25	59.94	68.20	8.26	Peak

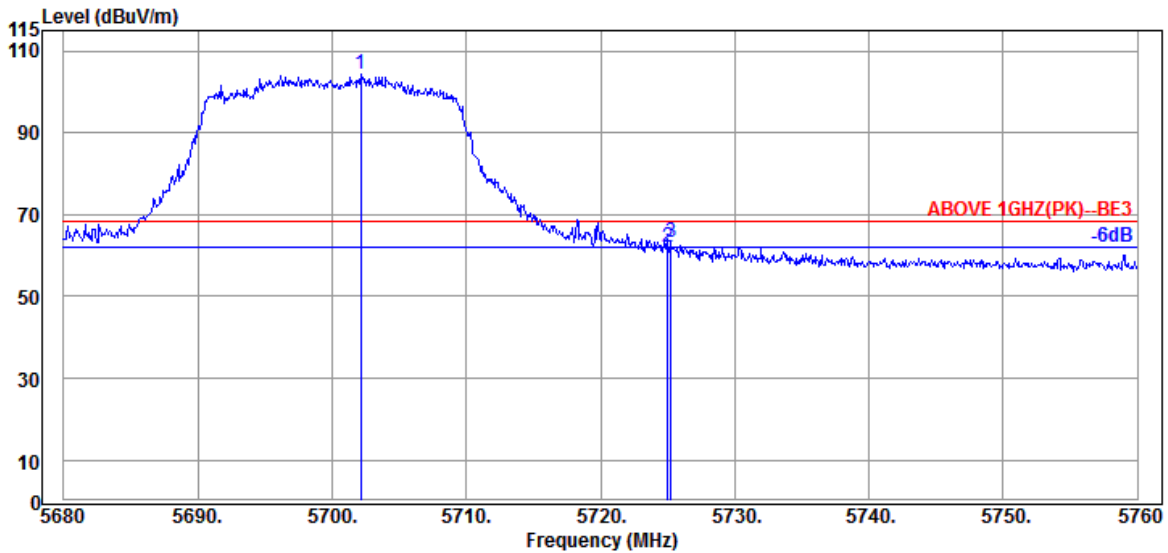


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5702.160	33.80	9.18	39.30	100.47	104.15	---	---	Peak
5725.040	33.80	9.20	39.30	58.35	62.05	68.20	6.15	Peak
5725.280	33.80	9.20	39.30	59.41	63.11	68.20	5.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

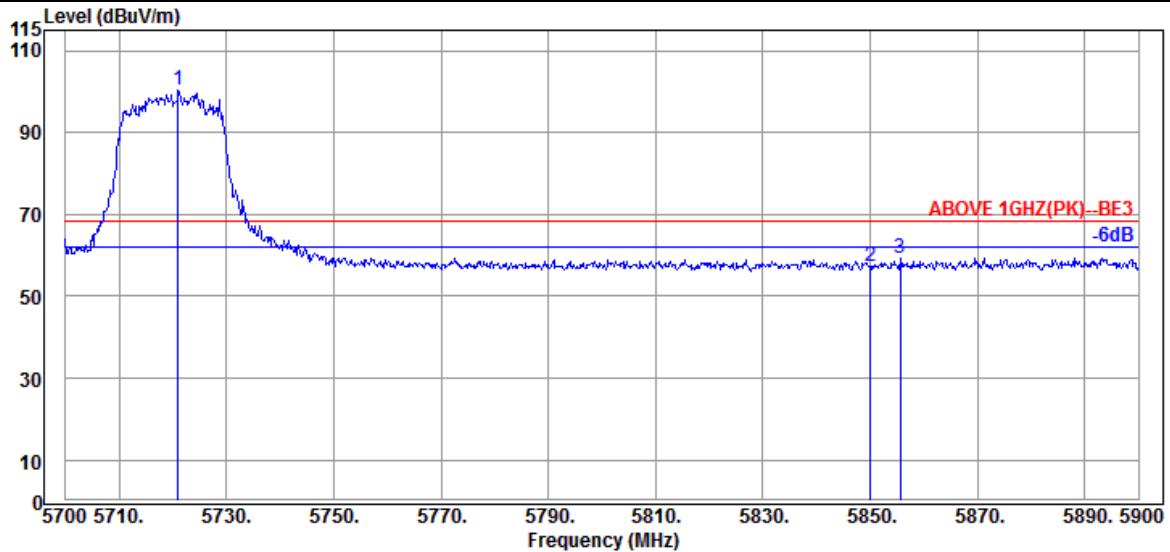

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.000	33.80	9.19	39.30	96.65	100.34	---	---	Peak
5850.000	34.10	9.25	39.33	53.11	57.13	68.20	11.07	Peak
5855.600	34.10	9.25	39.33	55.39	59.41	68.20	8.79	Peak

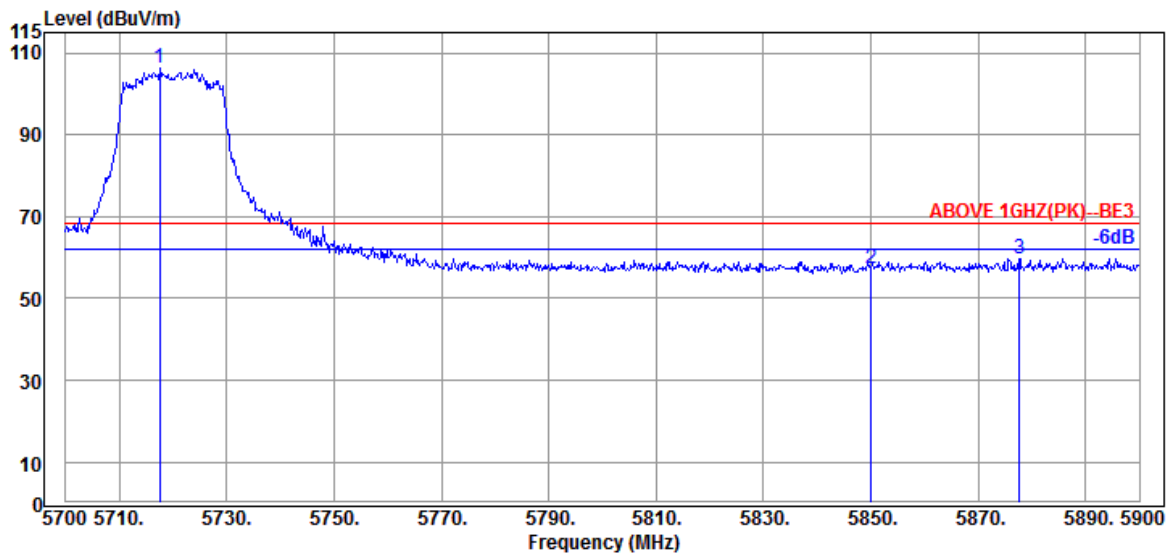


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.600	33.80	9.19	39.30	102.62	106.31	---	---	Peak
5850.000	34.10	9.25	39.33	53.41	57.43	68.20	10.77	Peak
5877.600	34.10	9.27	39.33	55.73	59.77	68.20	8.43	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

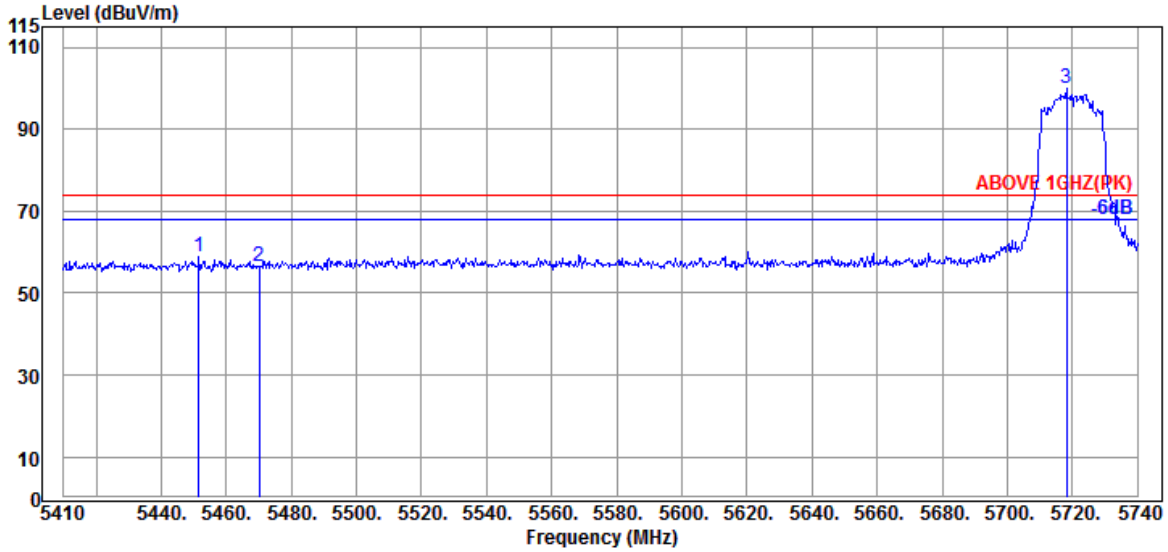

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.580	34.20	9.05	39.26	54.81	58.80	74.00	15.20	Peak
5470.060	34.17	9.06	39.26	52.54	56.51	74.00	17.49	Peak
@ 5718.220	33.80	9.19	39.30	96.27	99.96	---	---	Peak

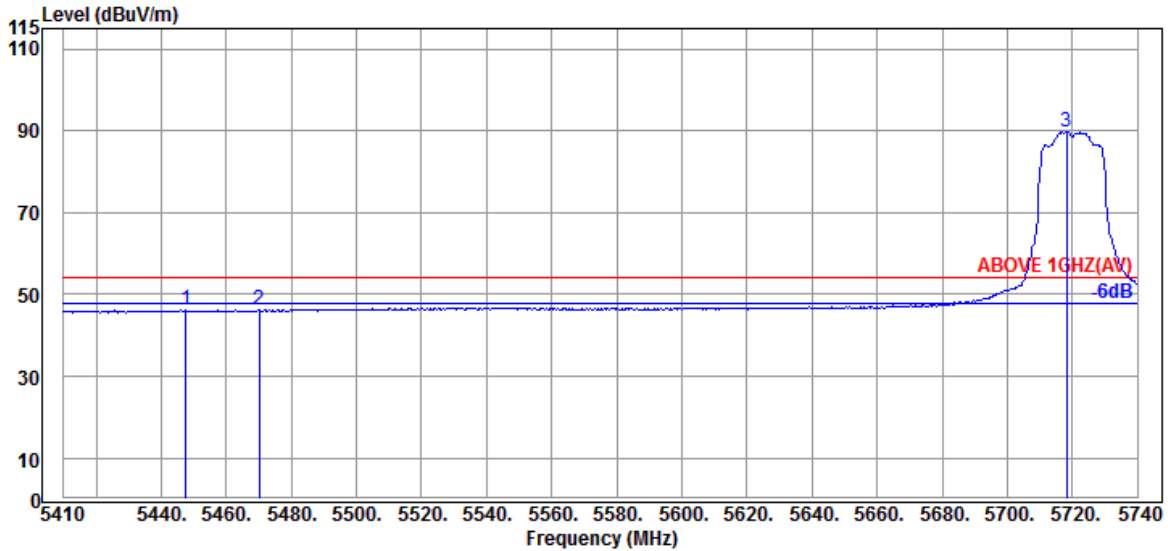


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.620	34.17	9.04	39.26	42.14	46.09	54.00	7.91	Average
5470.060	34.17	9.06	39.26	42.08	46.05	54.00	7.95	Average
@ 5718.220	33.80	9.19	39.30	86.00	89.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

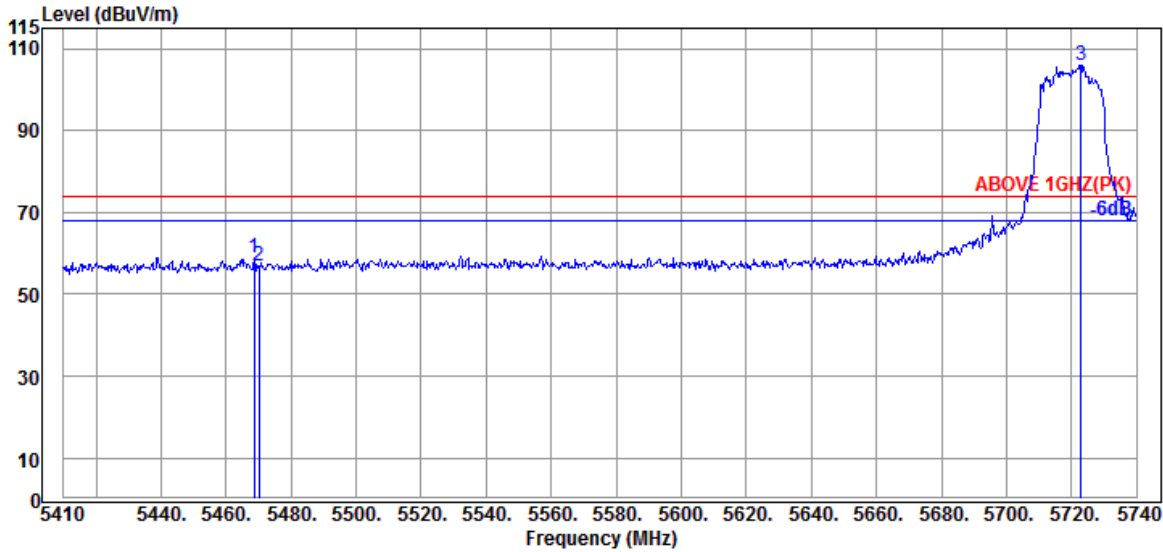

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.740	34.17	9.06	39.26	55.04	59.01	74.00	14.99	Peak
5470.060	34.17	9.06	39.26	53.13	57.10	74.00	16.90	Peak
@ 5722.840	33.80	9.20	39.30	102.25	105.95	---	---	Peak

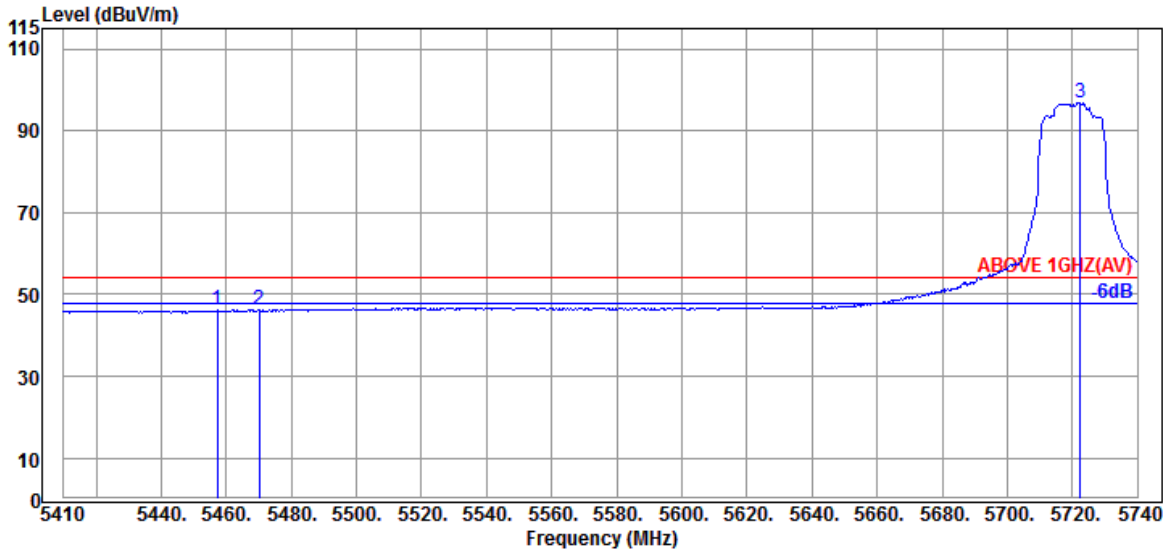


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.190	34.20	9.05	39.26	42.24	46.23	54.00	7.77	Average
5470.060	34.17	9.06	39.26	42.14	46.11	54.00	7.89	Average
@ 5722.510	33.80	9.20	39.30	93.09	96.79	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

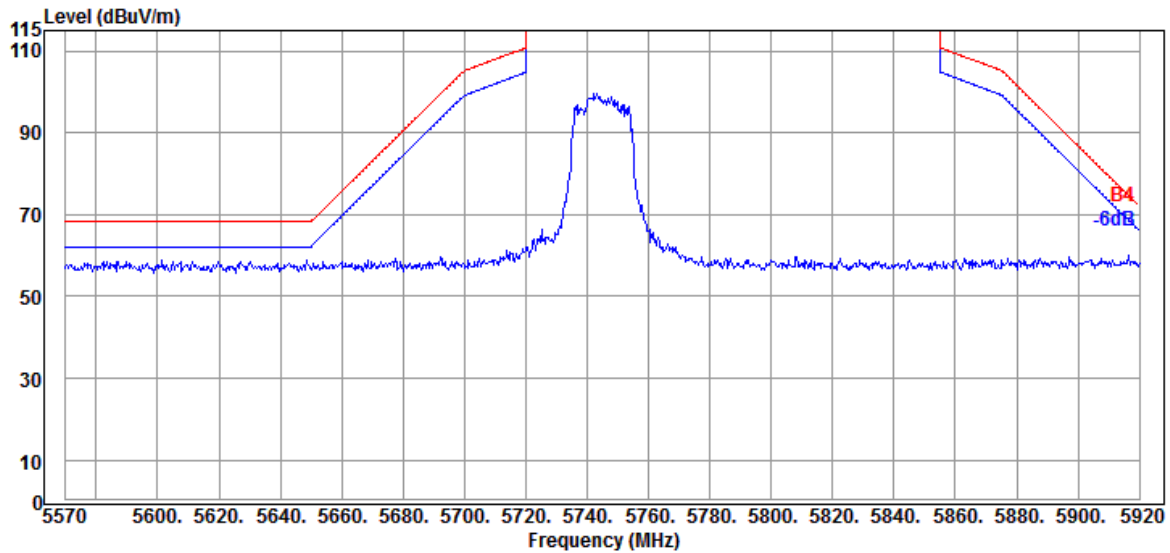


Antenna at Vertical Polarization

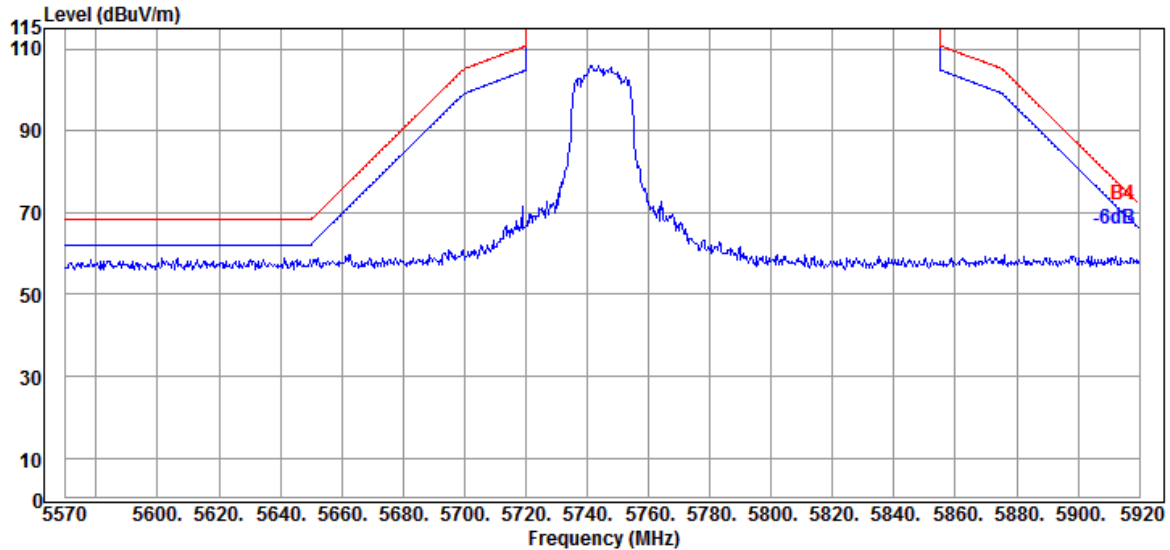


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

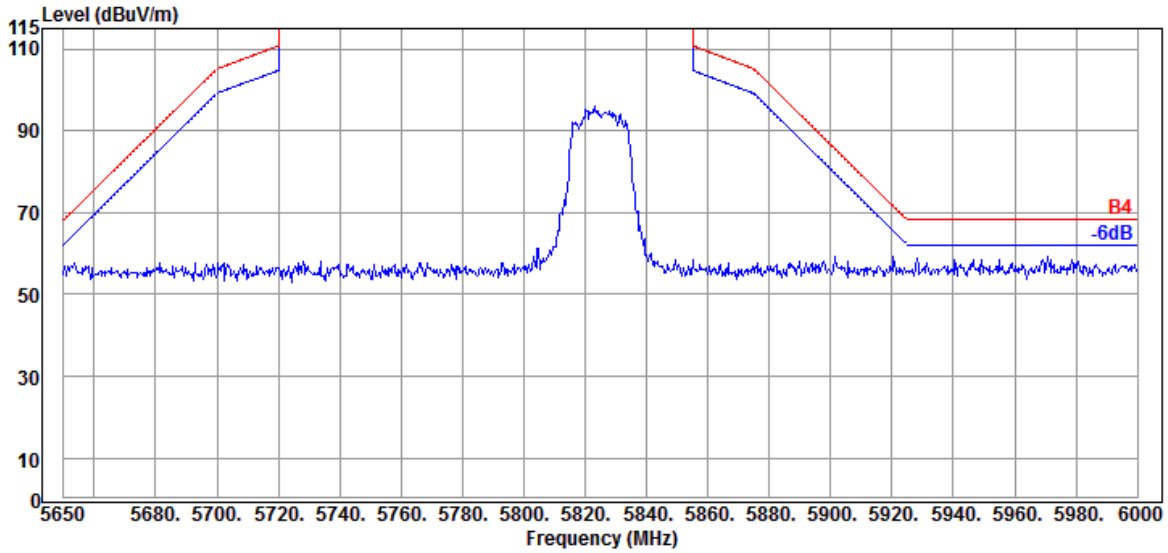

Antenna at Vertical Polarization

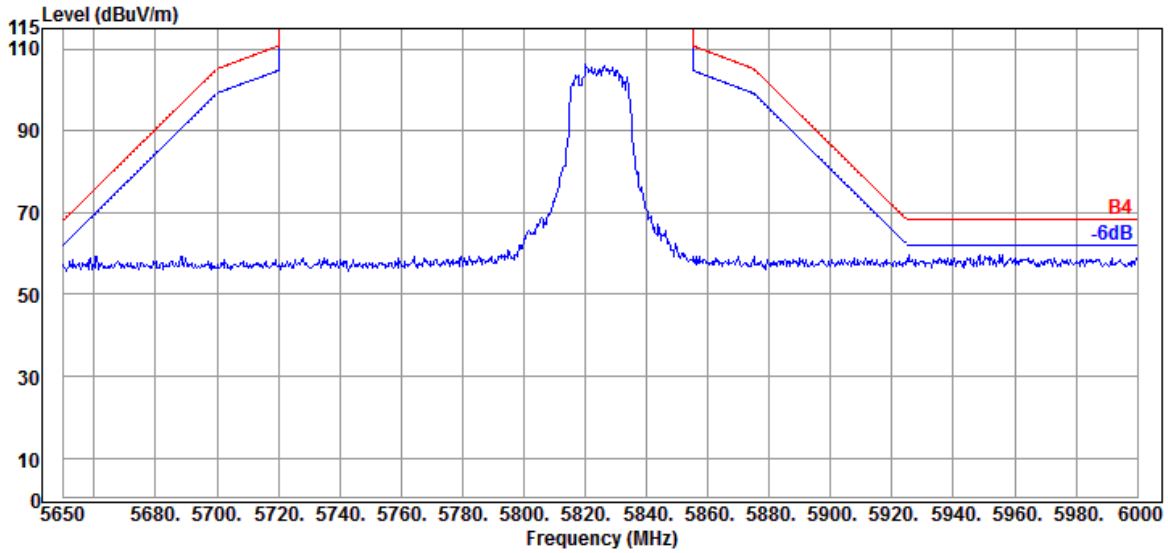


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

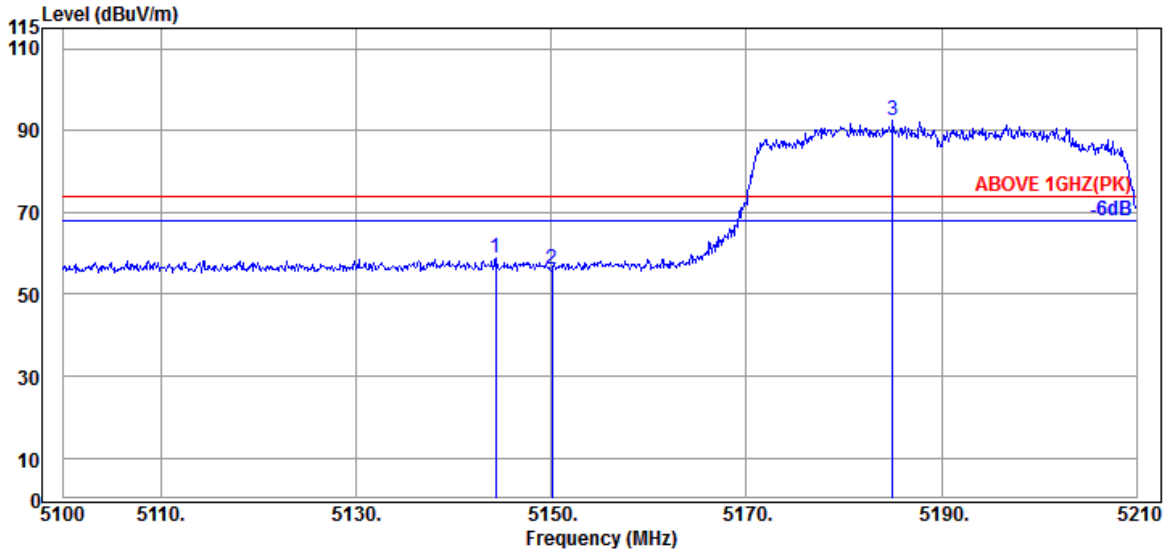

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.330	33.70	8.88	39.29	55.45	58.74	74.00	15.26	Peak
5150.050	33.70	8.88	39.29	53.00	56.29	74.00	17.71	Peak
@ 5185.030	33.70	8.90	39.28	89.17	92.49	---	---	Peak

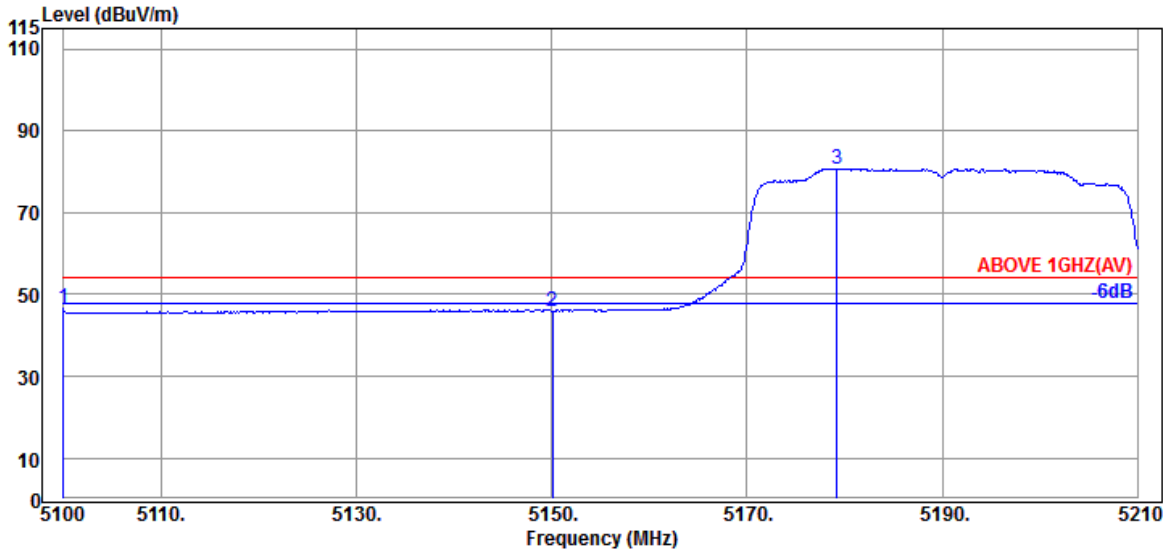


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5100.000	33.70	8.86	39.29	43.48	46.75	54.00	7.25	Average
5150.050	33.70	8.88	39.29	42.65	45.94	54.00	8.06	Average
@ 5179.200	33.70	8.90	39.28	77.45	80.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

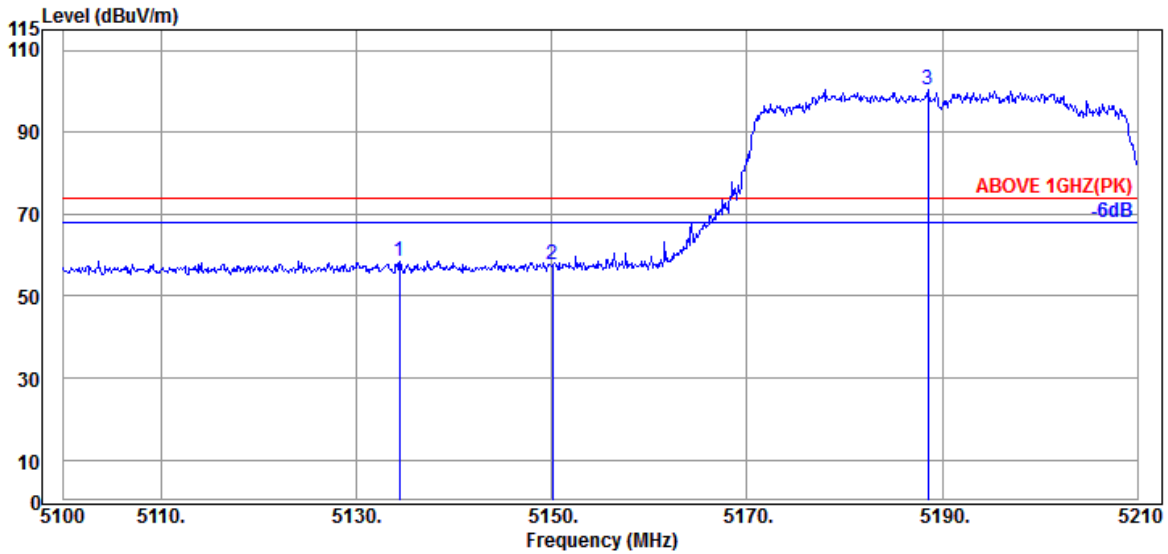

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.430	33.70	8.88	39.29	55.16	58.45	74.00	15.55	Peak
5150.050	33.70	8.88	39.29	54.53	57.82	74.00	16.18	Peak
@ 5188.550	33.70	8.91	39.28	97.20	100.53	---	---	Peak

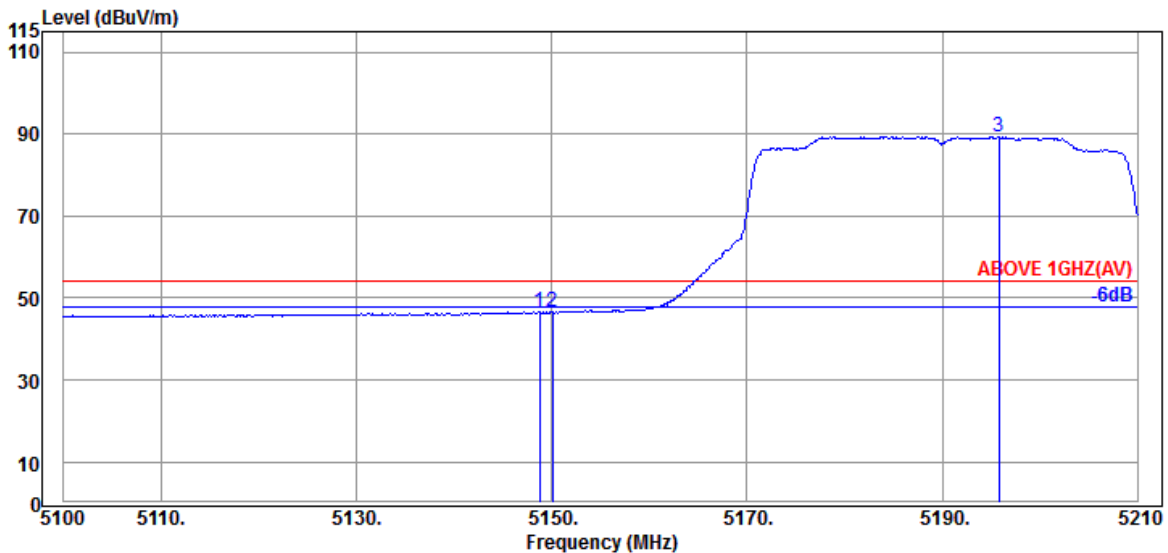


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	33.70	8.88	39.29	43.28	46.57	54.00	7.43	Average
5150.050	33.70	8.88	39.29	43.16	46.45	54.00	7.55	Average
@ 5195.810	33.70	8.91	39.28	85.96	89.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

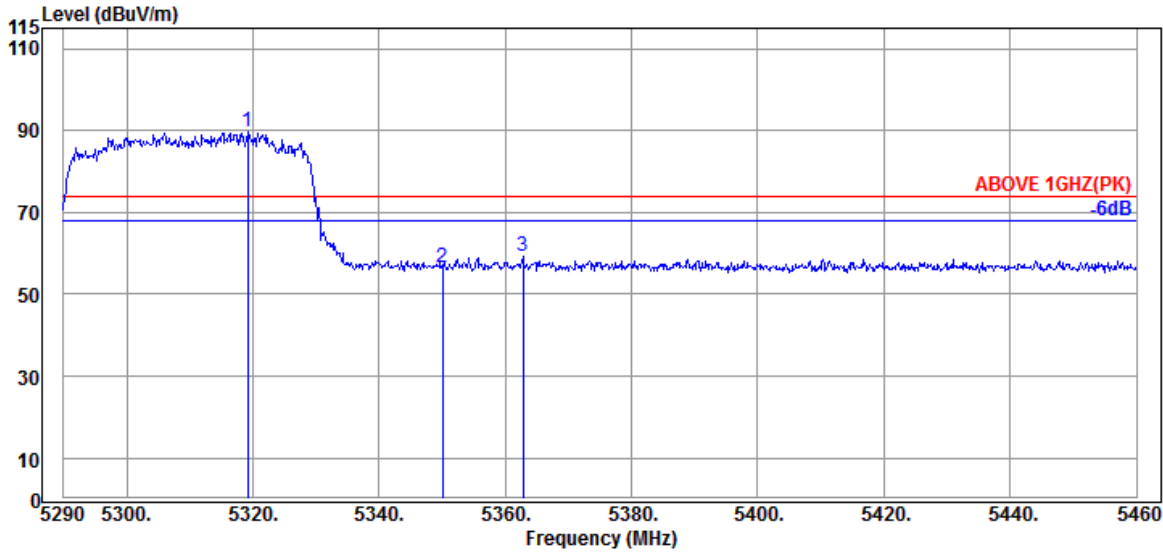

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5319.240	34.03	8.98	39.27	85.92	89.66	---	---	Peak
5350.010	33.90	8.99	39.27	52.71	56.33	74.00	17.67	Peak
5362.760	33.97	9.00	39.27	55.56	59.26	74.00	14.74	Peak

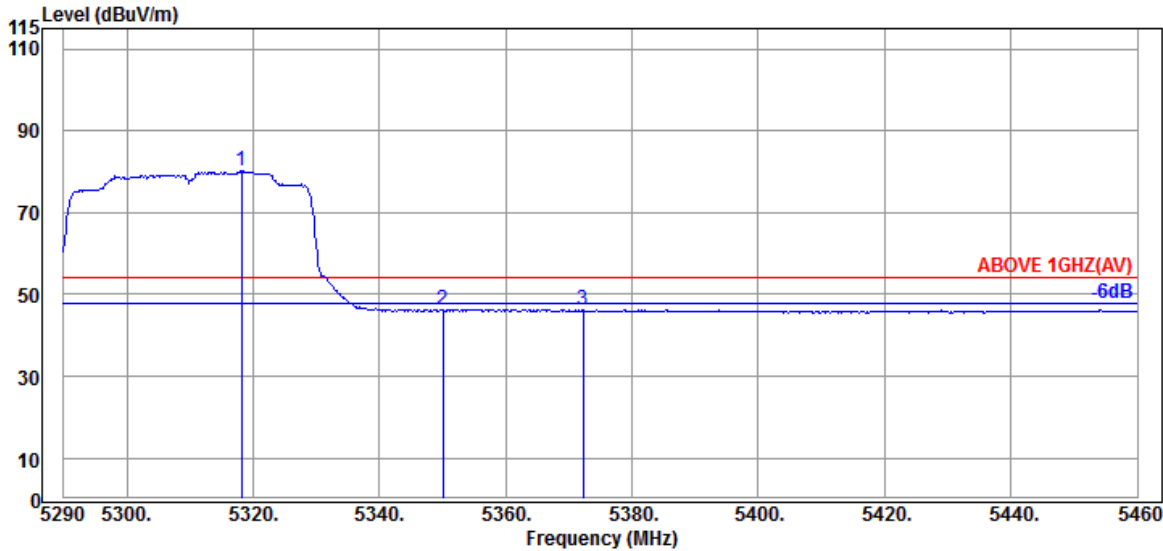


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.220	34.03	8.98	39.27	76.39	80.13	---	---	Average
5350.010	33.90	8.99	39.27	42.64	46.26	54.00	7.74	Average
5372.280	34.03	9.01	39.27	42.53	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

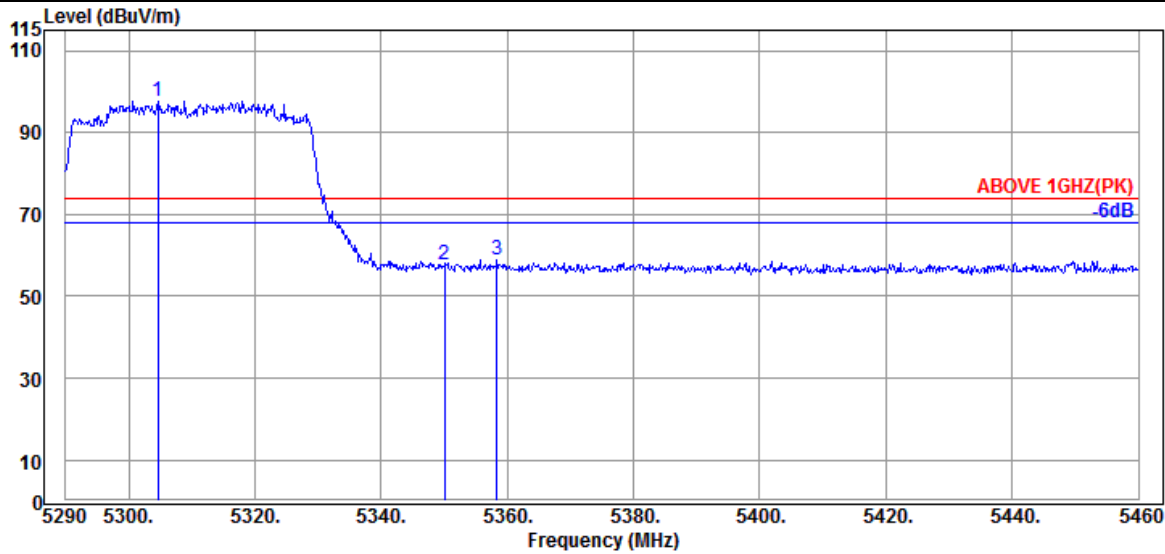

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.620	34.10	8.97	39.28	93.96	97.75	---	---	Peak
5350.010	33.90	8.99	39.27	53.97	57.59	74.00	16.41	Peak
5358.340	33.97	9.00	39.27	55.14	58.84	74.00	15.16	Peak

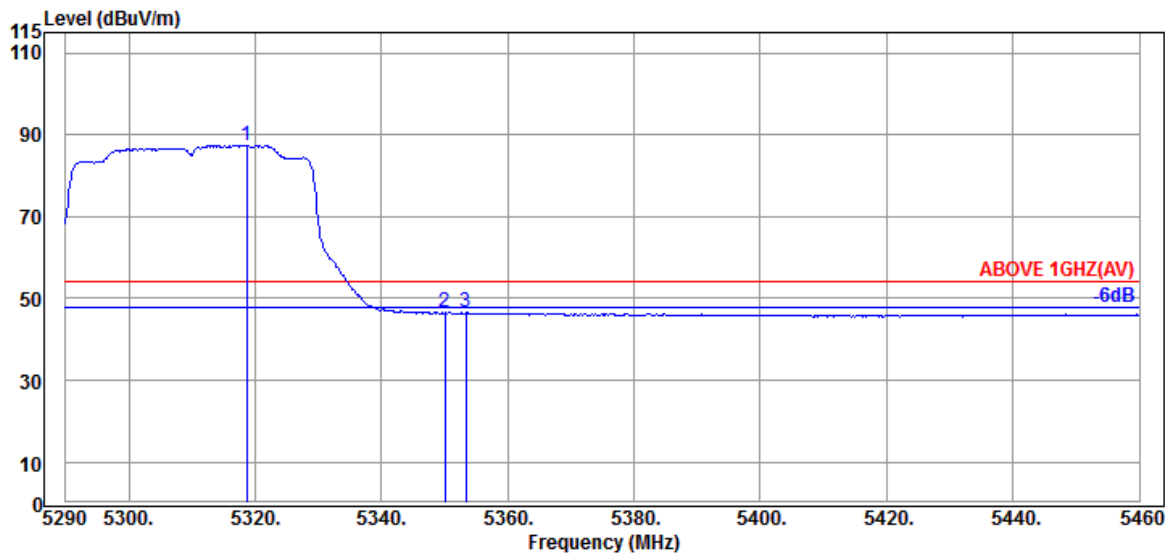


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.730	34.03	8.98	39.27	83.79	87.53	---	---	Average
5350.010	33.90	8.99	39.27	43.01	46.63	54.00	7.37	Average
5353.410	33.90	8.99	39.27	42.93	46.55	54.00	7.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

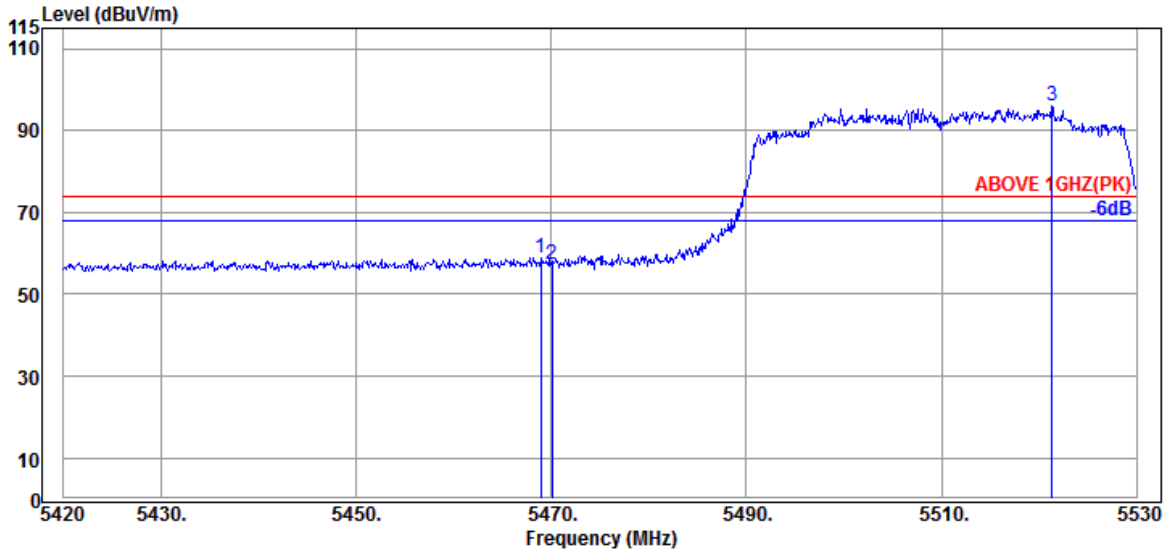

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	55.03	59.00	74.00	15.00	Peak
5470.050	34.17	9.06	39.26	53.19	57.16	74.00	16.84	Peak
@ 5521.310	34.10	9.09	39.26	92.02	95.95	---	---	Peak

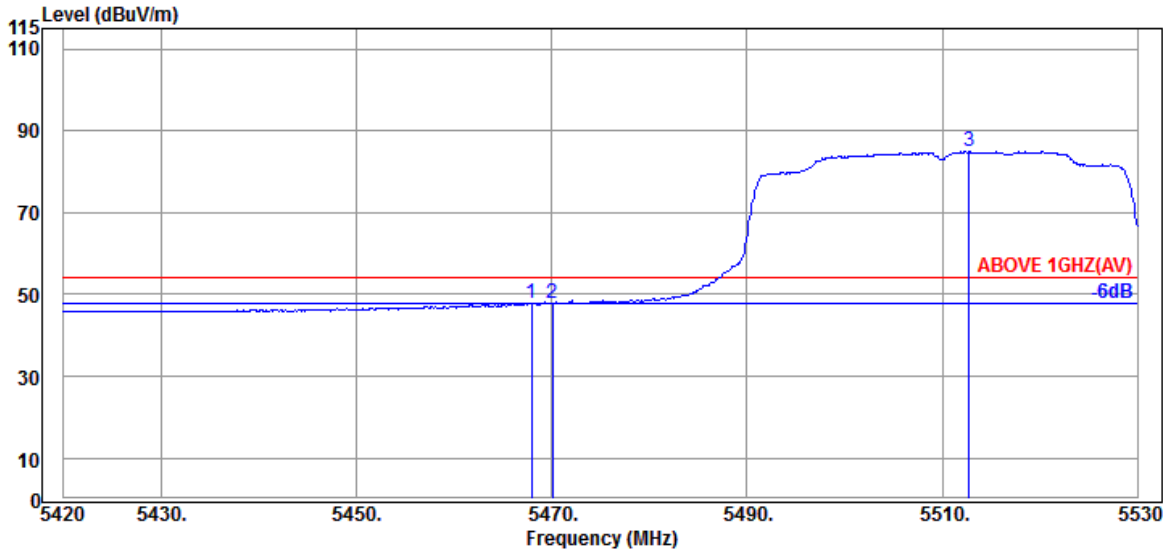


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.17	9.06	39.26	44.01	47.98	54.00	6.02	Average
5470.050	34.17	9.06	39.26	43.88	47.85	54.00	6.15	Average
@ 5512.730	34.10	9.09	39.26	80.99	84.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

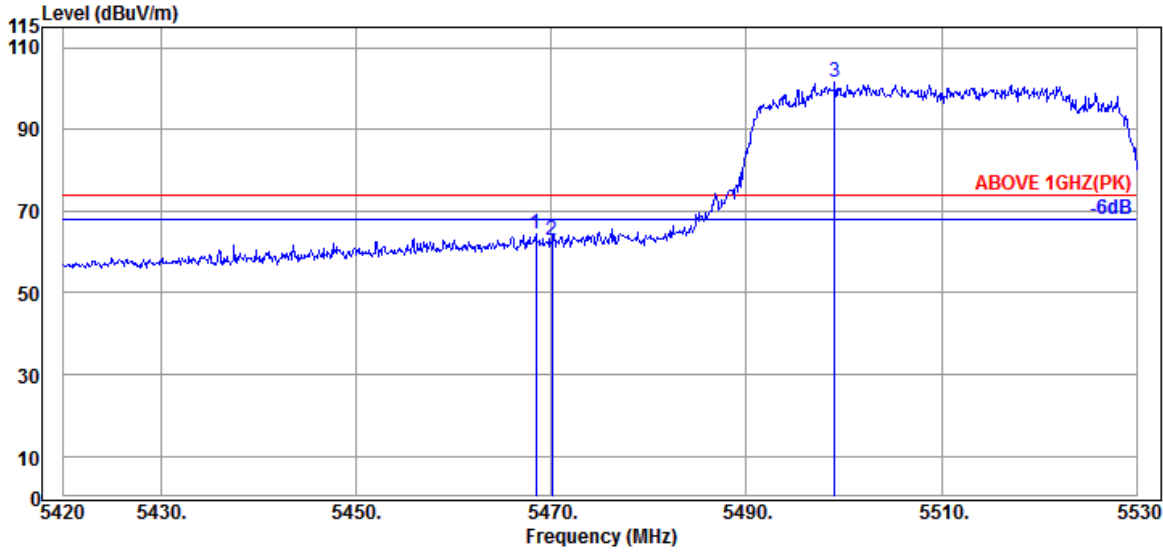

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.17	9.06	39.26	60.34	64.31	74.00	9.69	Peak
5470.050	34.17	9.06	39.26	58.72	62.69	74.00	11.31	Peak
@ 5499.090	34.10	9.08	39.26	97.73	101.65	---	---	Peak

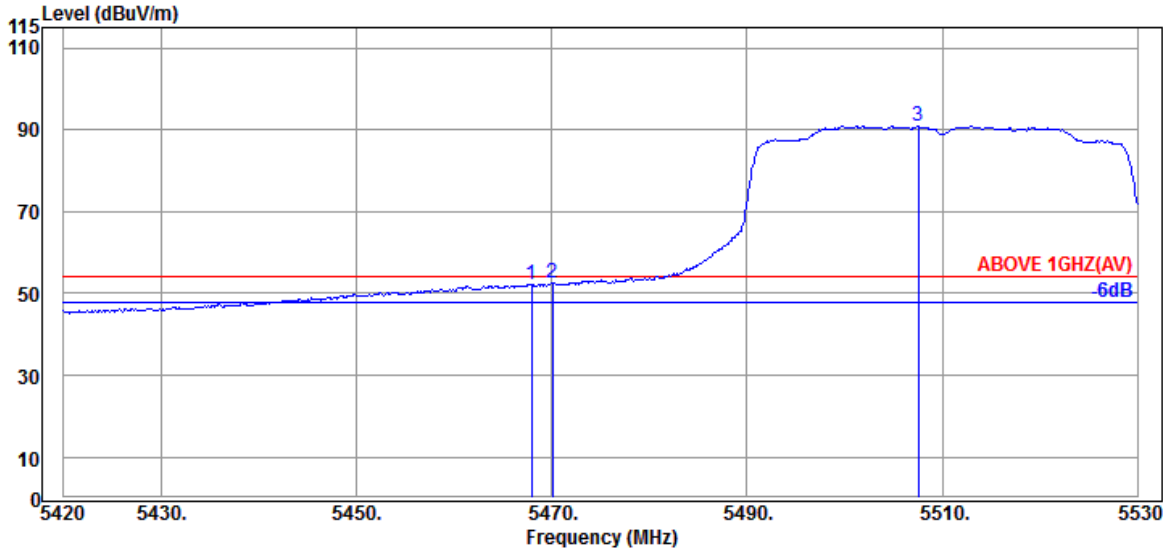


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.17	9.06	39.26	48.18	52.15	54.00	1.85	Average
5470.050	34.17	9.06	39.26	48.48	52.45	54.00	1.55	Average
@ 5507.560	34.10	9.08	39.26	86.93	90.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

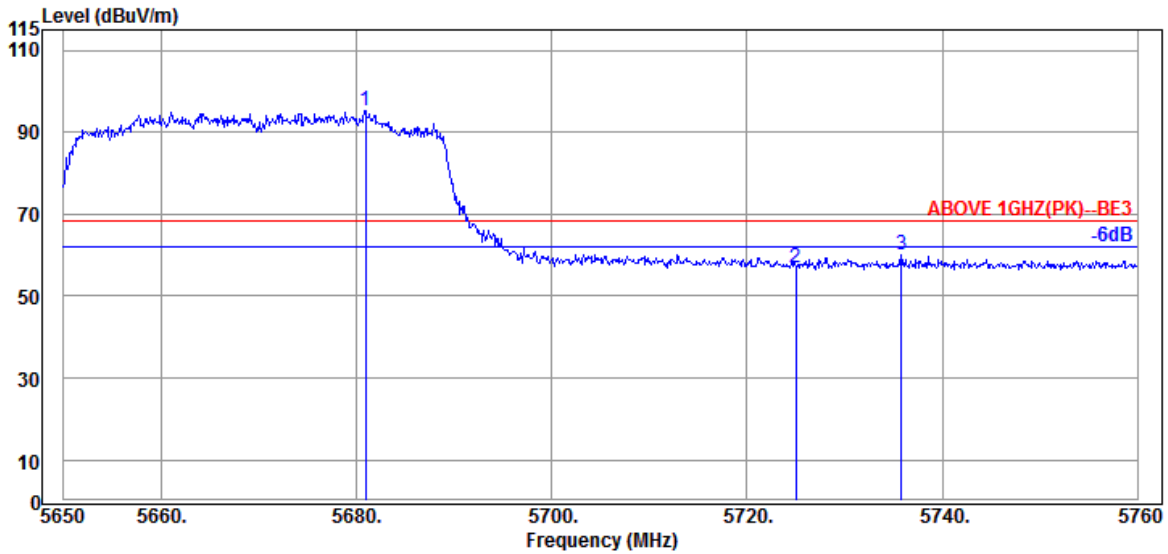

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.910	33.87	9.17	39.30	91.68	95.42	---	---	Peak
5725.020	33.80	9.20	39.30	53.06	56.76	68.20	11.44	Peak
5735.800	33.80	9.20	39.31	56.23	59.92	68.20	8.28	Peak

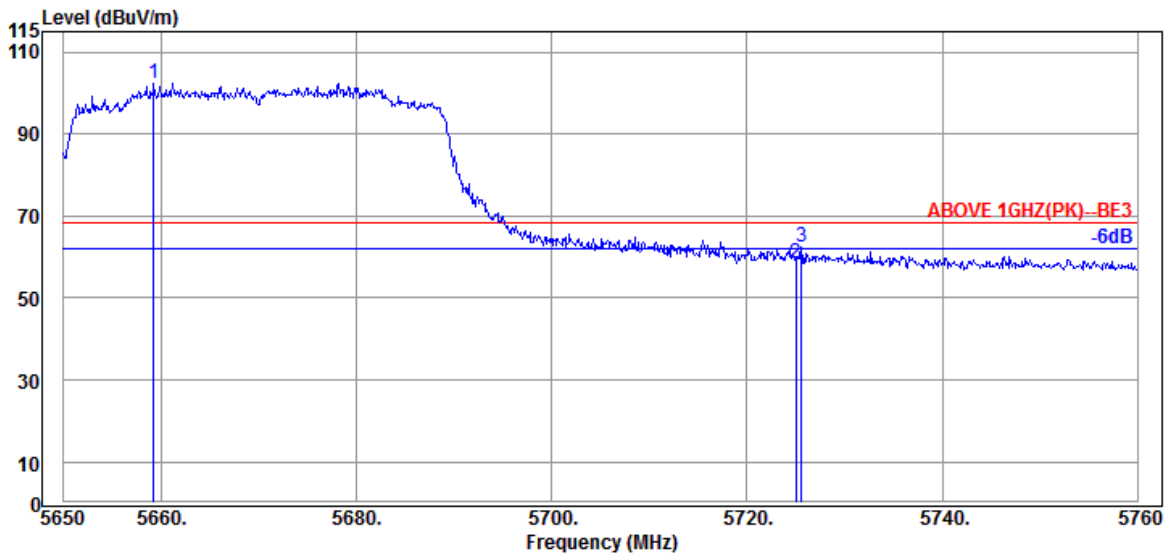


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.240	33.93	9.16	39.29	98.66	102.46	---	---	Peak
5725.020	33.80	9.20	39.30	54.91	58.61	68.20	9.59	Peak
5725.570	33.80	9.20	39.30	58.62	62.32	68.20	5.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

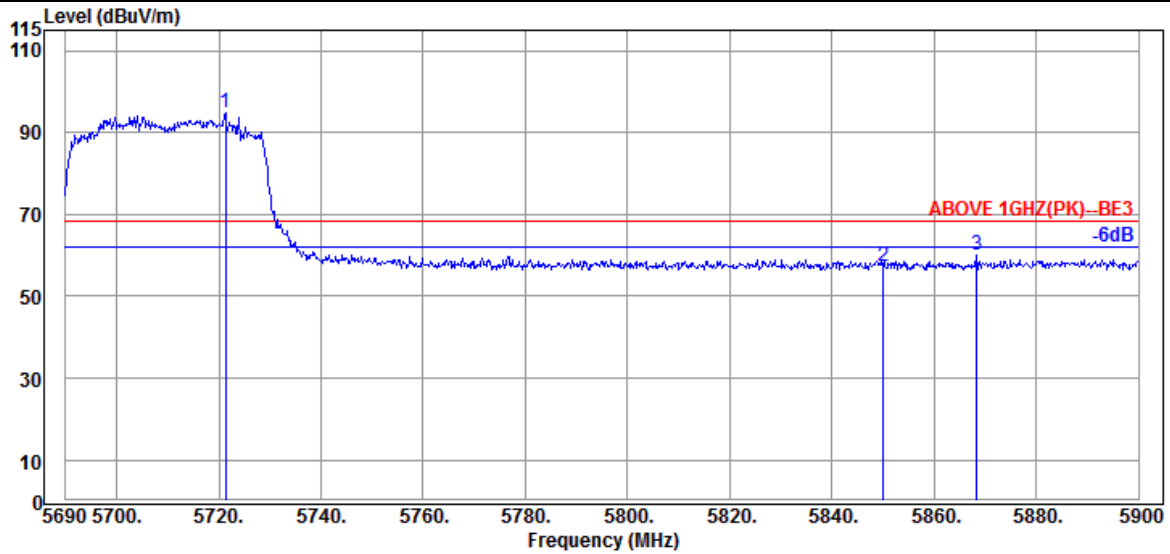

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.290	33.80	9.19	39.30	91.31	95.00	---	---	Peak
5850.020	34.10	9.25	39.33	53.24	57.26	68.20	10.94	Peak
5868.290	34.10	9.26	39.33	56.13	60.16	68.20	8.04	Peak

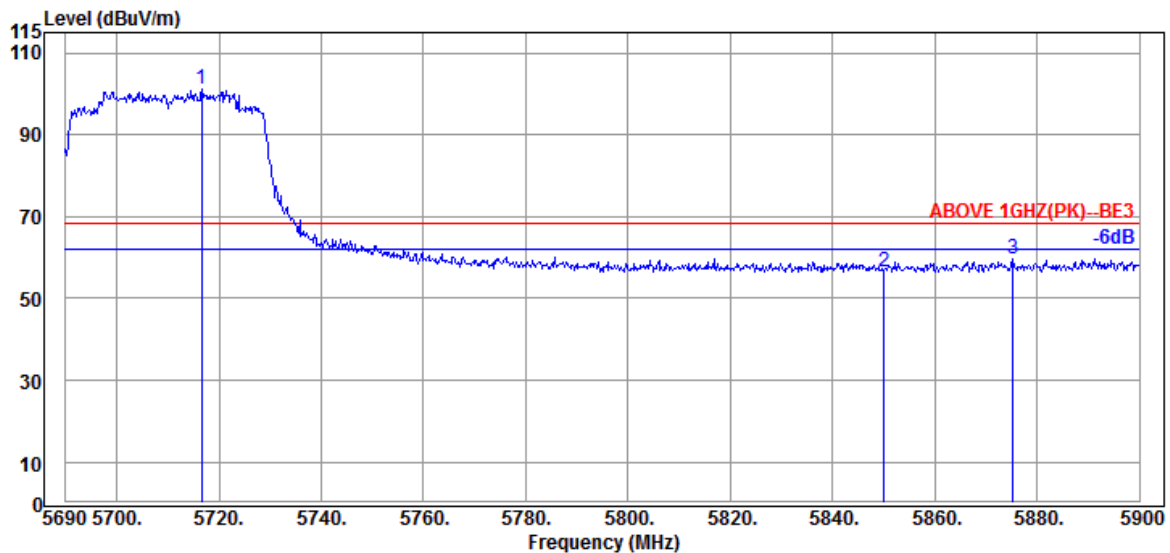


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.670	33.80	9.19	39.30	97.30	100.99	---	---	Peak
5850.020	34.10	9.25	39.33	52.37	56.39	68.20	11.81	Peak
5875.220	34.10	9.27	39.33	55.47	59.51	68.20	8.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

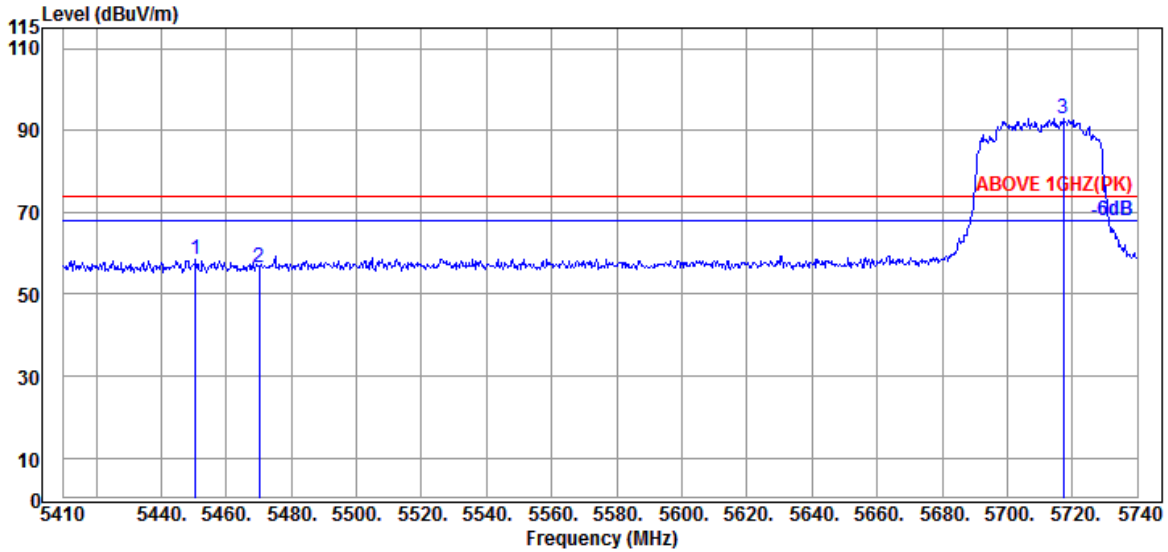

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.590	34.20	9.05	39.26	54.35	58.34	74.00	15.66	Peak
5470.060	34.17	9.06	39.26	52.71	56.68	74.00	17.32	Peak
@ 5717.230	33.80	9.19	39.30	89.34	93.03	---	---	Peak

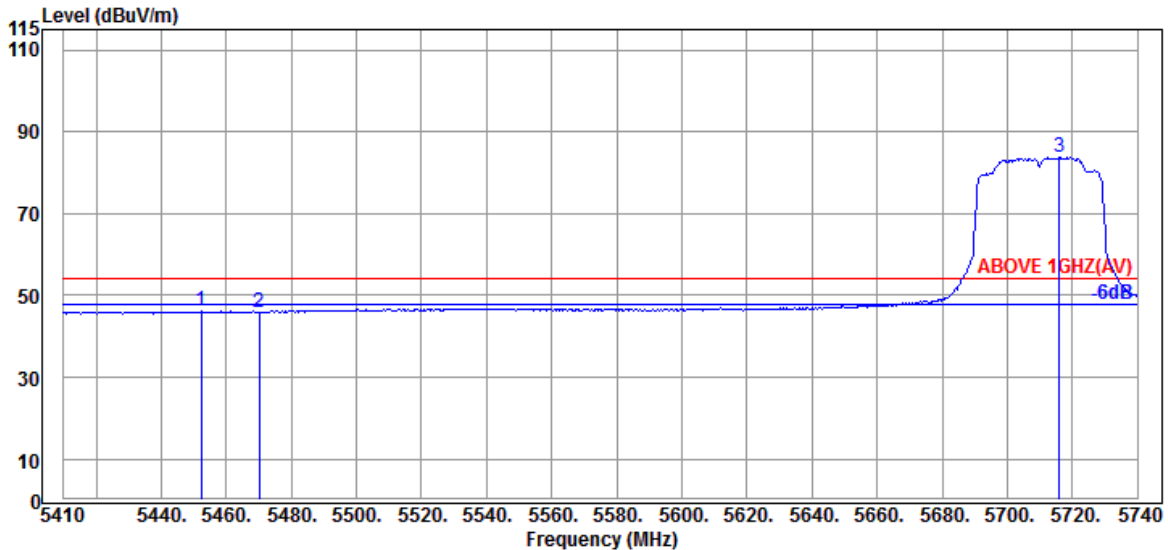


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5452.240	34.20	9.05	39.26	42.31	46.30	54.00	7.70	Average
5470.060	34.17	9.06	39.26	41.94	45.91	54.00	8.09	Average
@ 5715.910	33.80	9.19	39.30	80.03	83.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

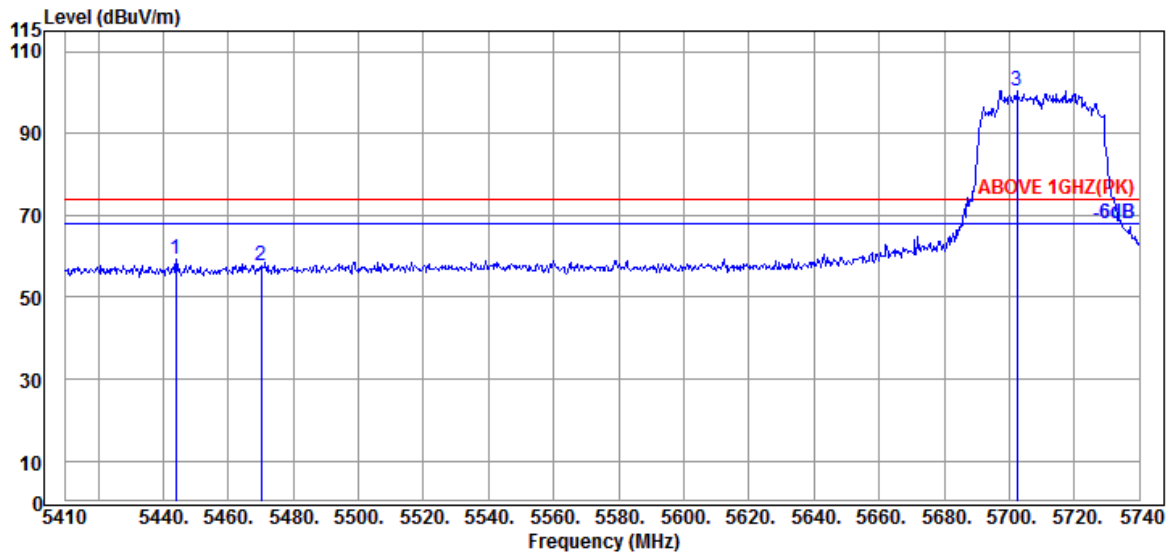

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.17	9.04	39.26	55.46	59.41	74.00	14.59	Peak
5470.060	34.17	9.06	39.26	53.65	57.62	74.00	16.38	Peak
@ 5702.380	33.80	9.18	39.30	96.73	100.41	---	---	Peak

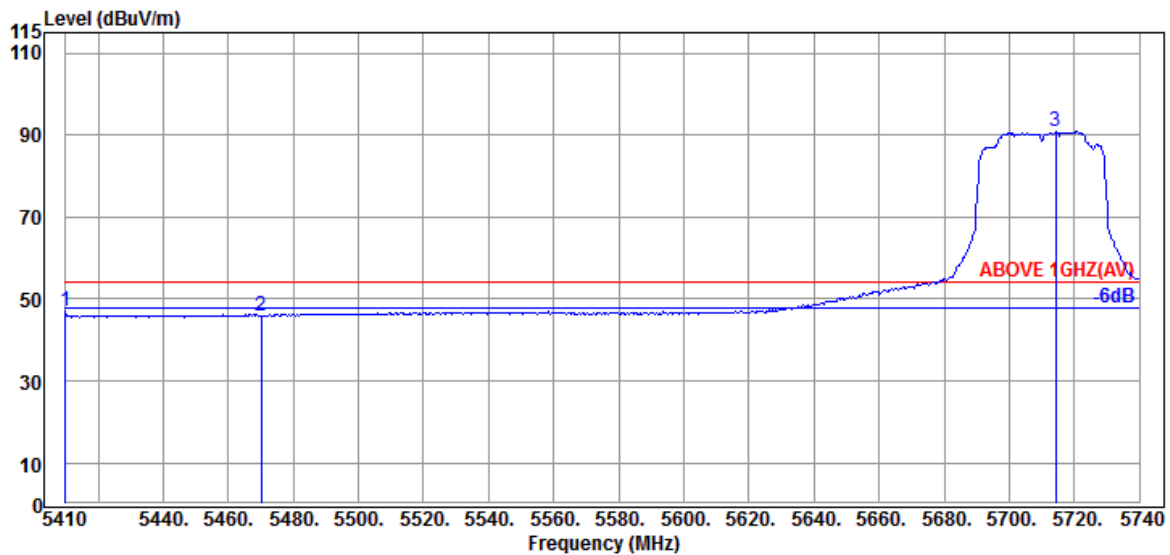


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.000	34.12	9.03	39.27	43.20	47.08	54.00	6.92	Average
5470.060	34.17	9.06	39.26	41.98	45.95	54.00	8.05	Average
@ 5714.260	33.80	9.19	39.30	87.05	90.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

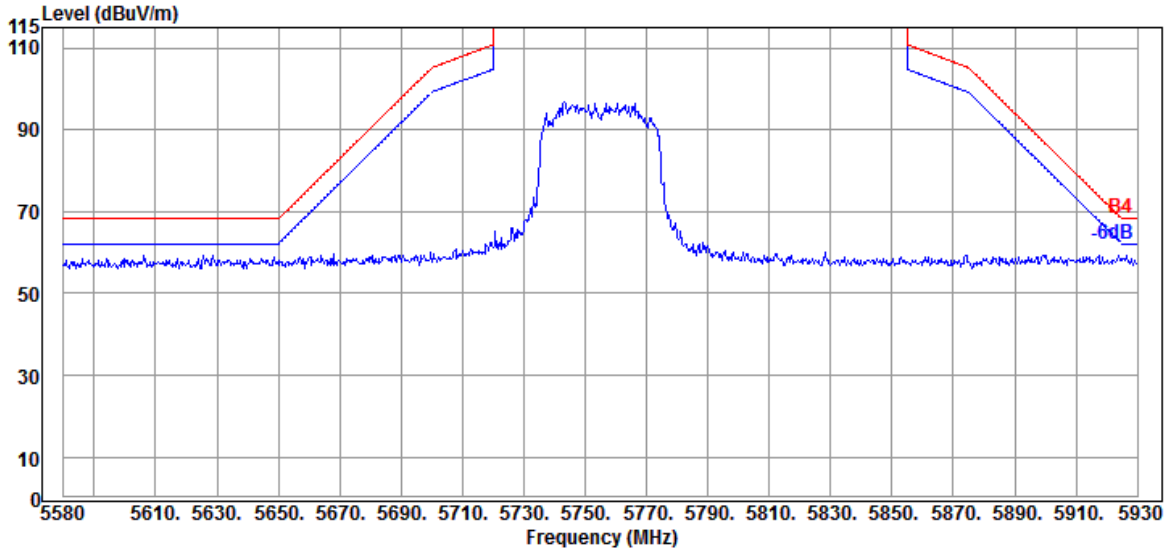


Antenna at Vertical Polarization

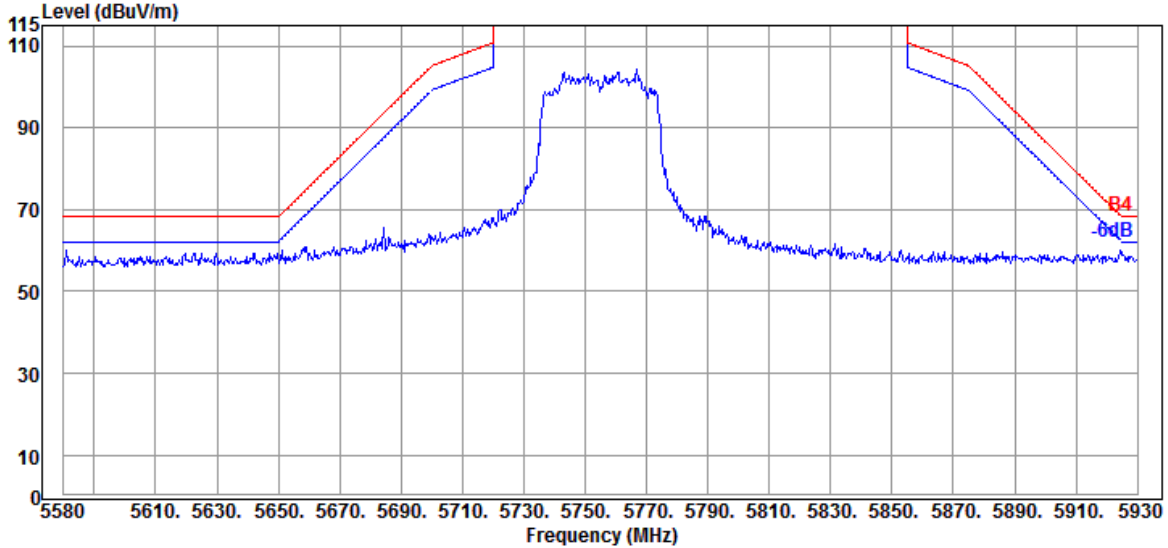


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

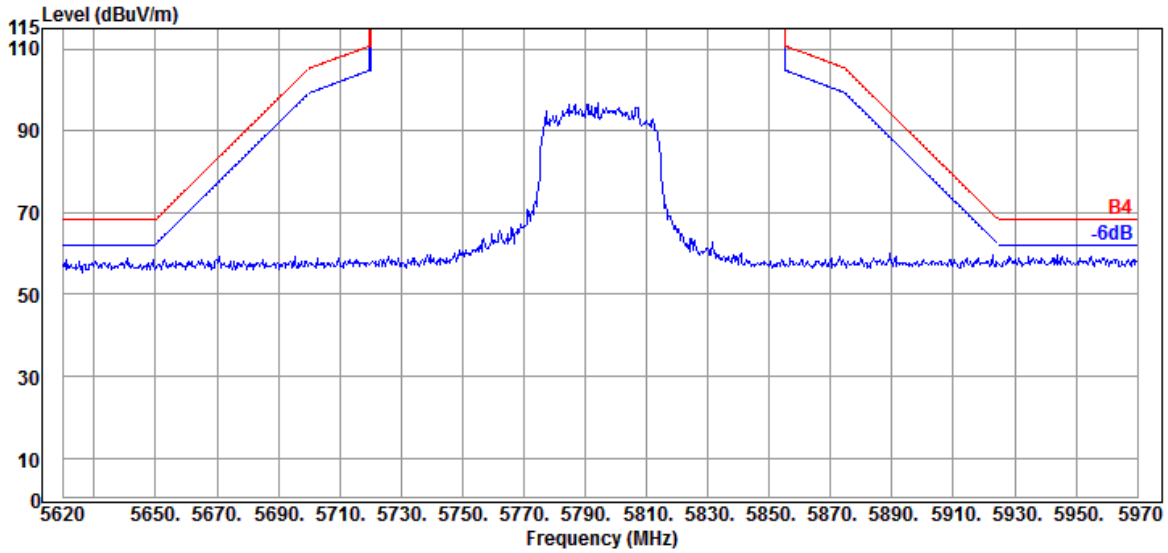

Antenna at Vertical Polarization

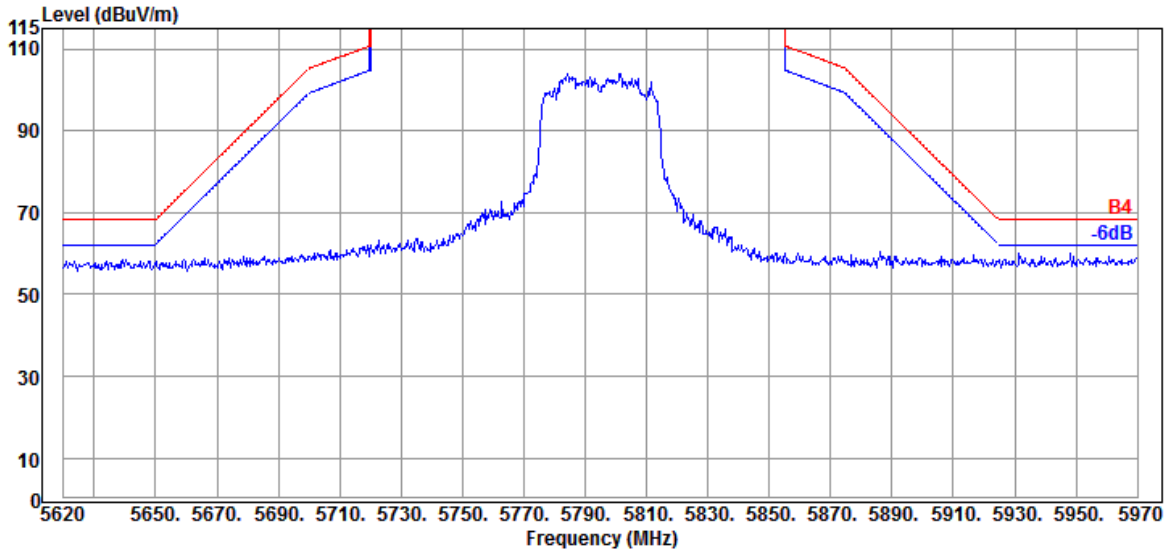


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

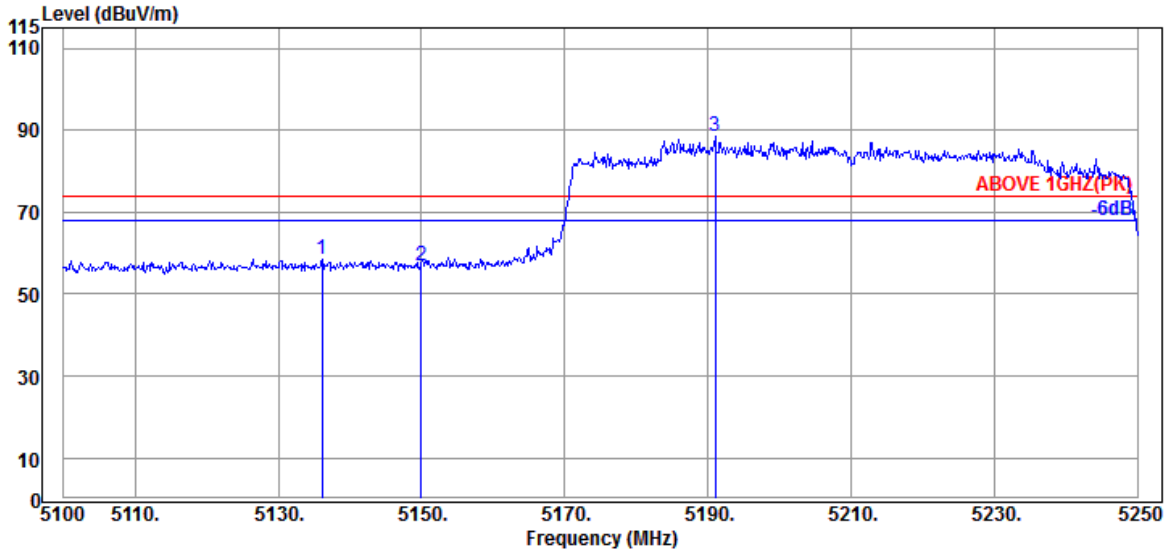

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.150	33.70	8.88	39.29	55.35	58.64	74.00	15.36	Peak
5149.950	33.70	8.88	39.29	53.50	56.79	74.00	17.21	Peak
@ 5191.050	33.70	8.91	39.28	85.17	88.50	---	---	Peak

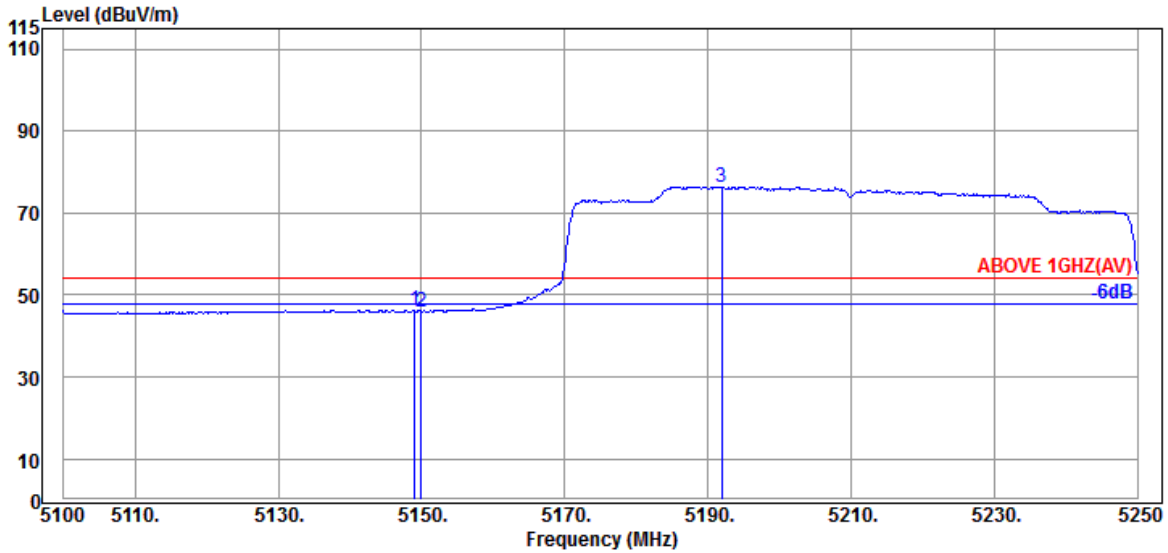


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	33.70	8.88	39.29	42.90	46.19	54.00	7.81	Average
5149.950	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5191.950	33.70	8.91	39.28	73.09	76.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

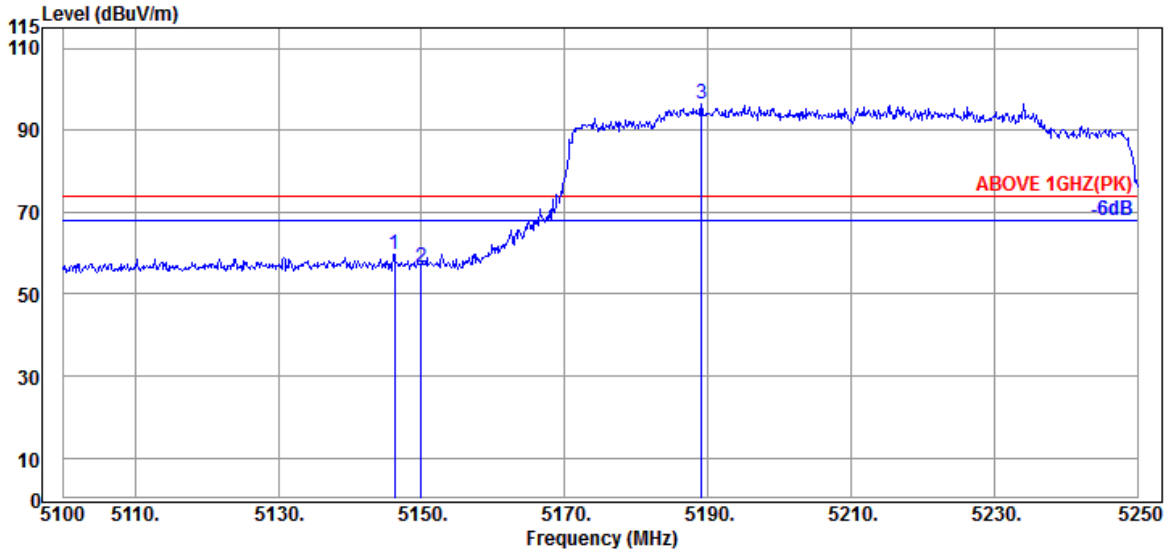

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.70	8.88	39.29	56.50	59.79	74.00	14.21	Peak
5149.950	33.70	8.88	39.29	53.25	56.54	74.00	17.46	Peak
@ 5189.100	33.70	8.91	39.28	93.26	96.59	---	---	Peak

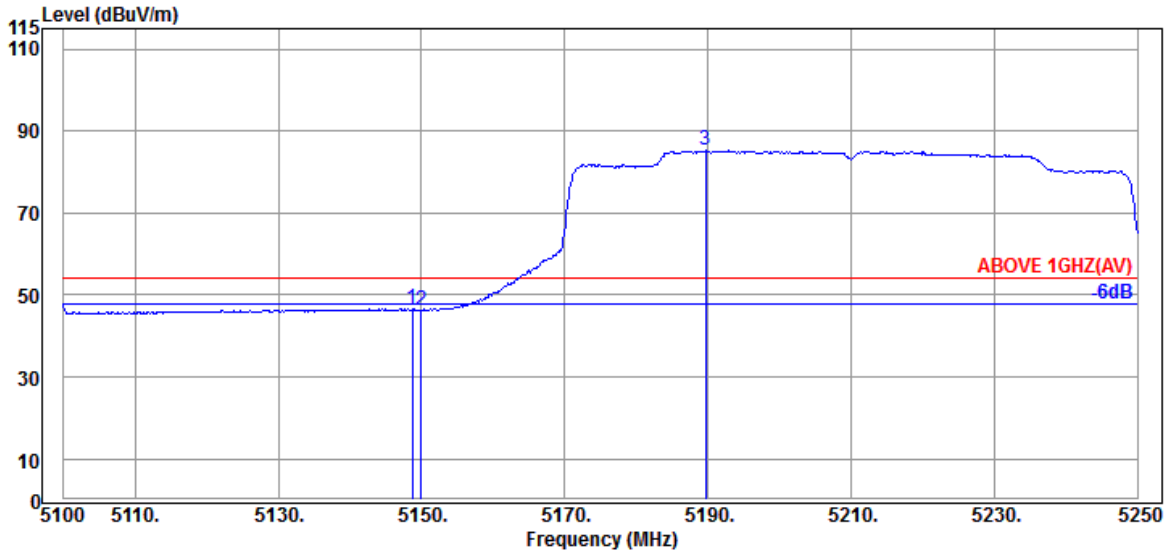


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	33.70	8.88	39.29	43.29	46.58	54.00	7.42	Average
5149.950	33.70	8.88	39.29	42.99	46.28	54.00	7.72	Average
@ 5189.700	33.70	8.91	39.28	81.95	85.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

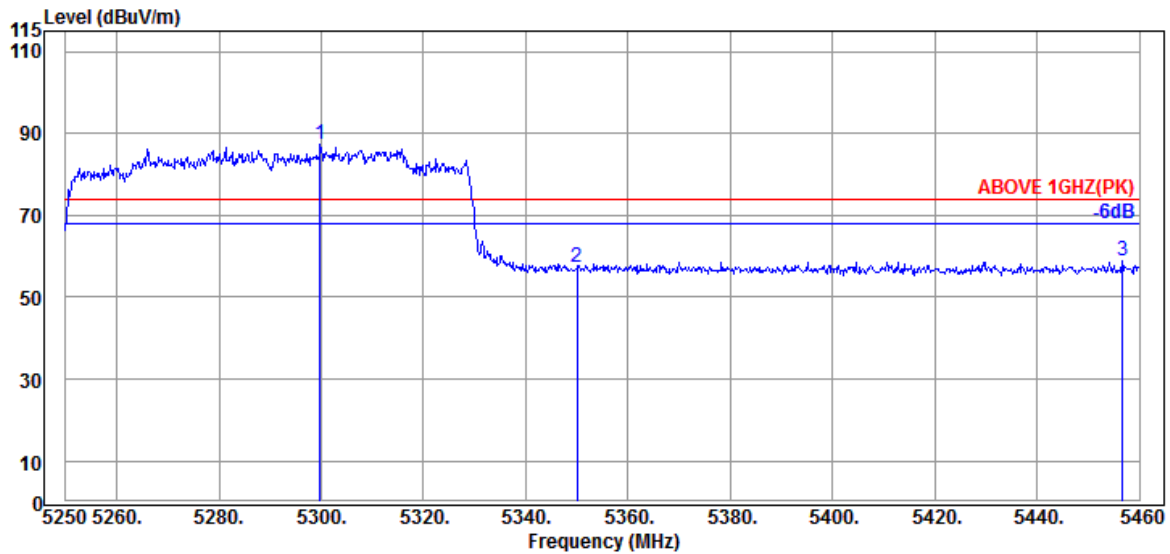

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.770	34.10	8.97	39.28	83.60	87.39	---	---	Peak
5349.960	33.90	8.99	39.27	53.84	57.46	74.00	16.54	Peak
5456.640	34.20	9.05	39.26	55.01	59.00	74.00	15.00	Peak

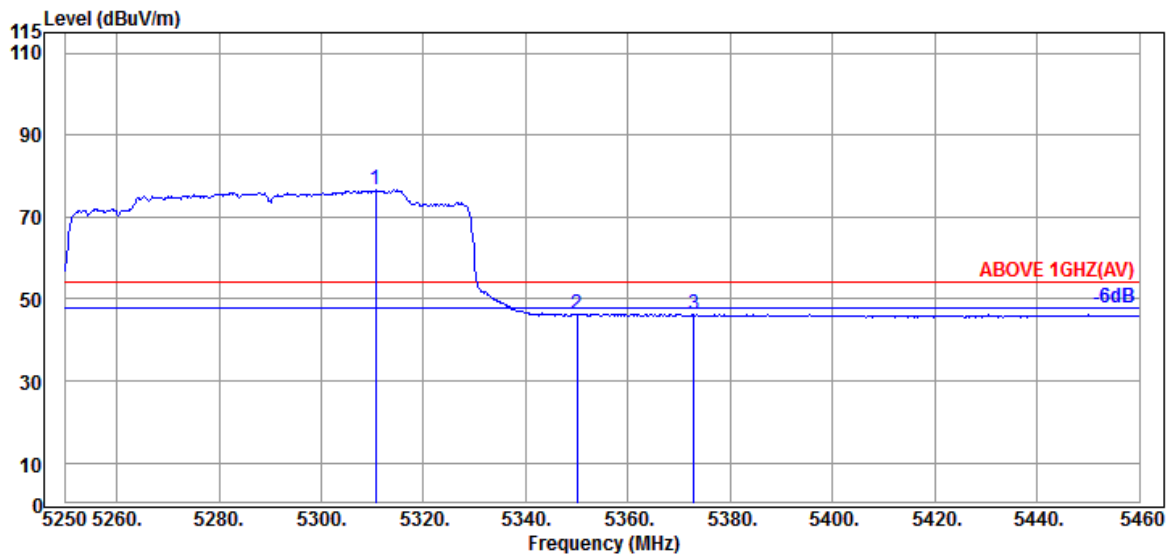


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.690	34.03	8.98	39.27	72.84	76.58	---	---	Average
5349.960	33.90	8.99	39.27	42.60	46.22	54.00	7.78	Average
5372.850	34.03	9.01	39.27	42.61	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

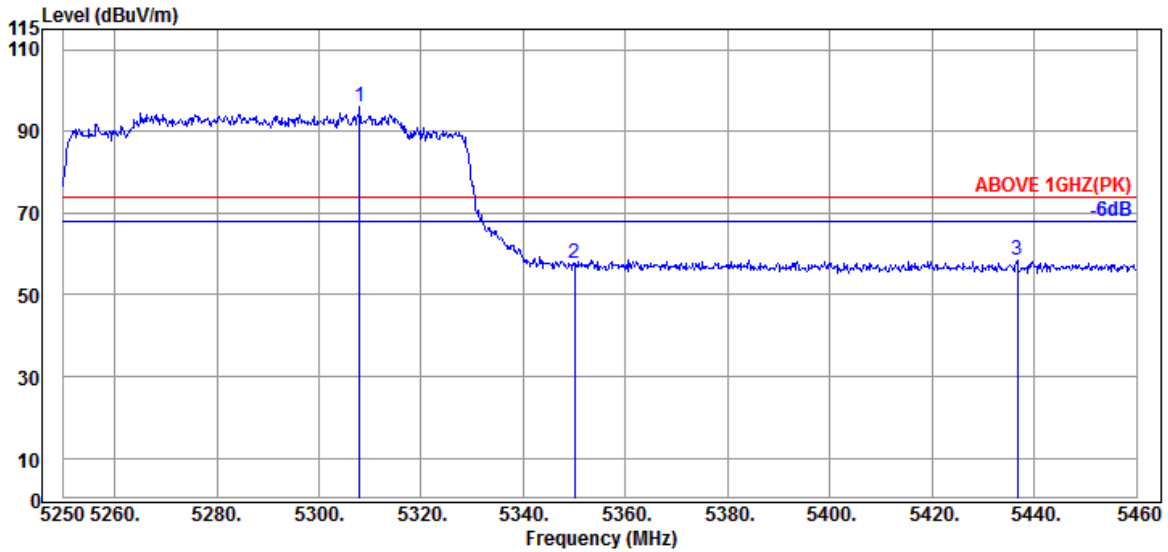

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.960	34.03	8.98	39.28	92.43	96.16	---	---	Peak
5349.960	33.90	8.99	39.27	54.17	57.79	74.00	16.21	Peak
5436.690	34.17	9.04	39.26	54.61	58.56	74.00	15.44	Peak

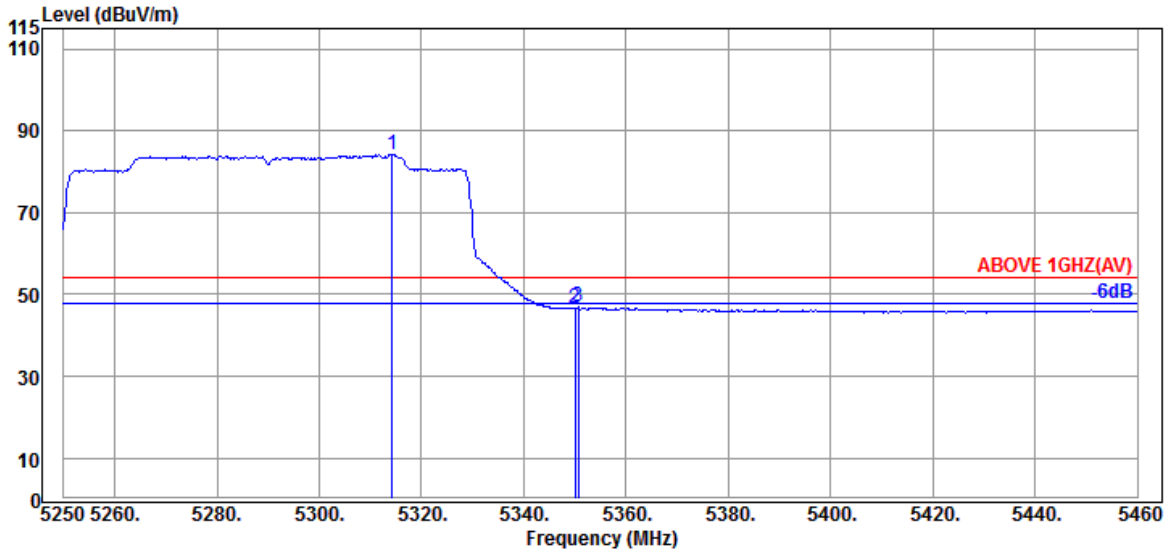


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.260	34.03	8.98	39.27	80.56	84.30	---	---	Average
5349.960	33.90	8.99	39.27	42.91	46.53	54.00	7.47	Average
5350.590	33.90	8.99	39.27	43.23	46.85	54.00	7.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

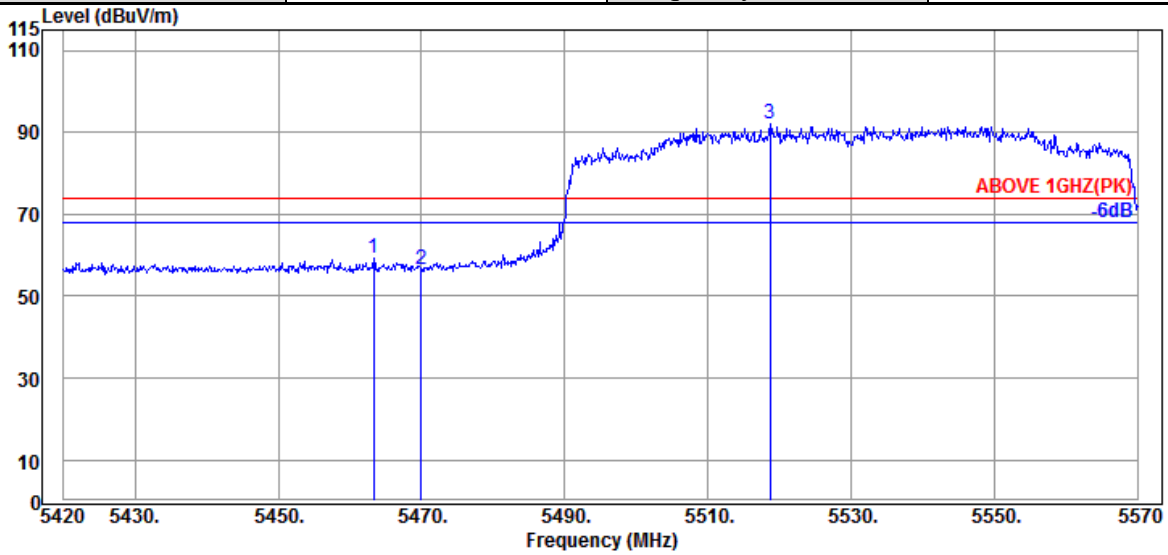

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.350	34.20	9.05	39.26	55.23	59.22	74.00	14.78	Peak
5469.950	34.17	9.06	39.26	52.45	56.42	74.00	17.58	Peak
@ 5518.700	34.10	9.09	39.26	88.02	91.95	---	---	Peak

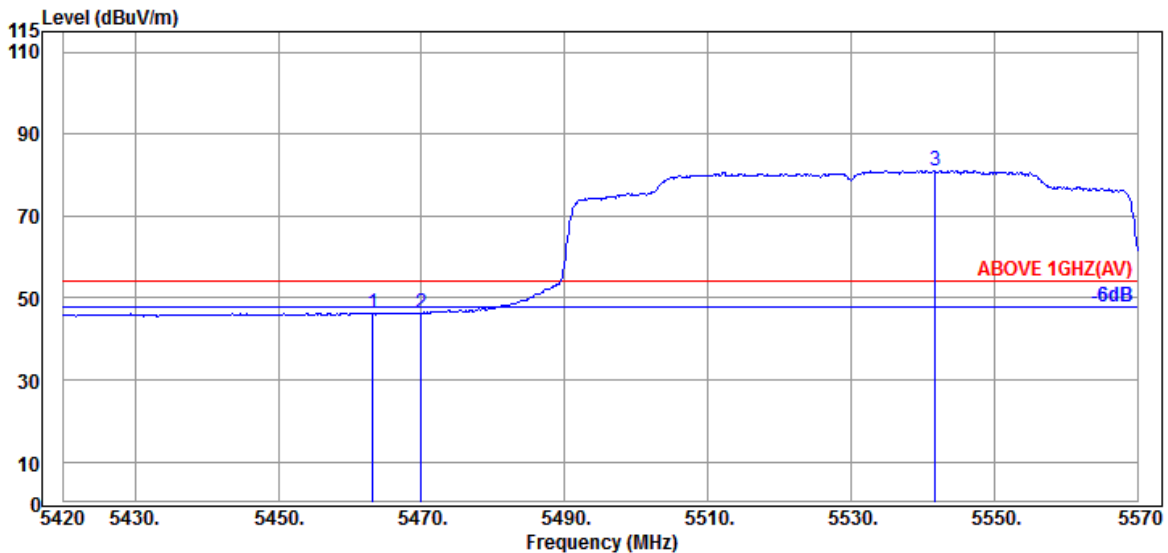


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.200	34.20	9.05	39.26	42.44	46.43	54.00	7.57	Average
5469.950	34.17	9.06	39.26	42.33	46.30	54.00	7.70	Average
@ 5541.800	34.10	9.09	39.27	77.18	81.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

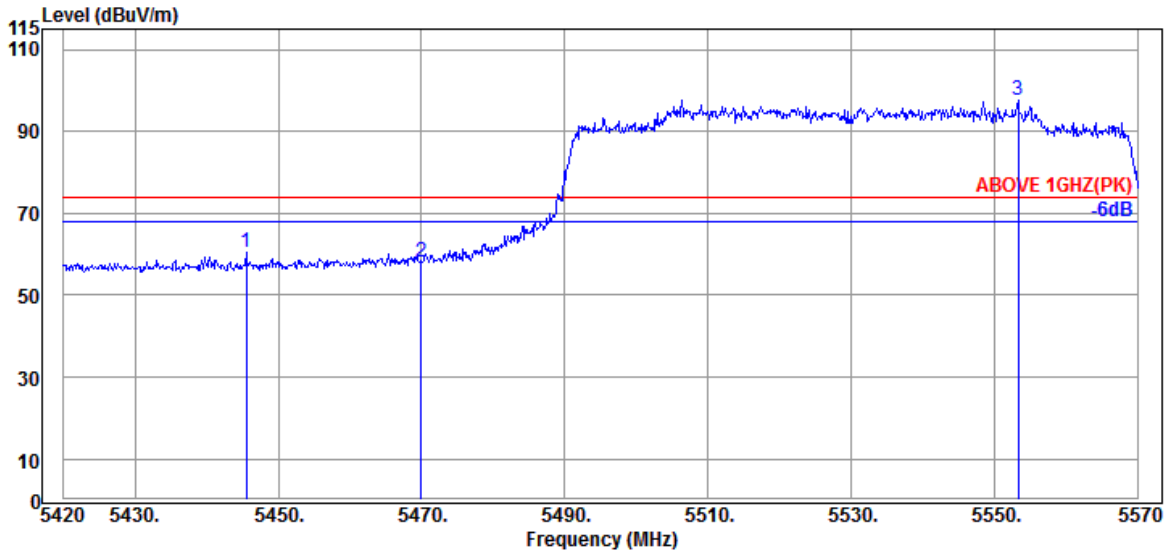

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.17	9.04	39.26	56.39	60.34	74.00	13.66	Peak
5469.950	34.17	9.06	39.26	54.27	58.24	74.00	15.76	Peak
@ 5553.350	34.10	9.10	39.27	93.65	97.58	---	---	Peak

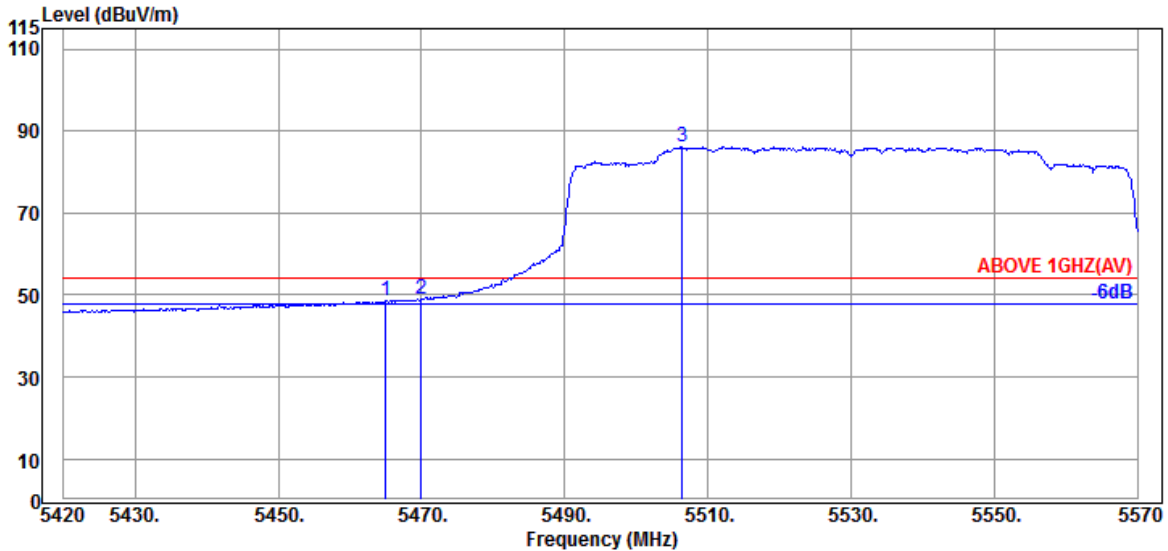


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	9.06	39.26	44.82	48.79	54.00	5.21	Average
5469.950	34.17	9.06	39.26	44.99	48.96	54.00	5.04	Average
@ 5506.400	34.10	9.08	39.26	82.16	86.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

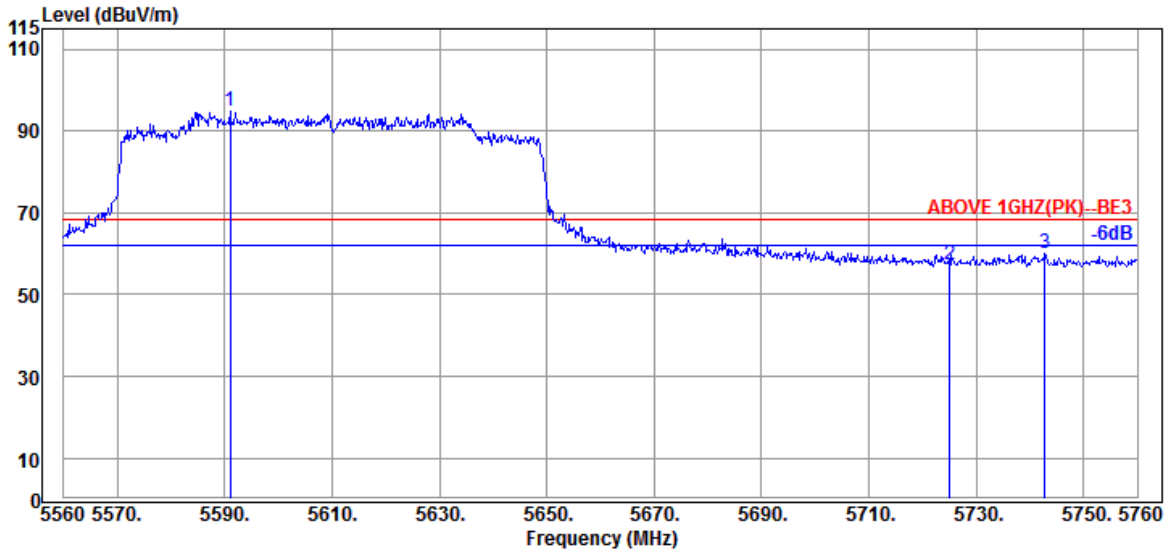

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.000	34.03	9.12	39.28	91.11	94.98	---	---	Peak
5725.000	33.80	9.20	39.30	53.74	57.44	68.20	10.76	Peak
5742.800	33.80	9.20	39.31	56.53	60.22	68.20	7.98	Peak

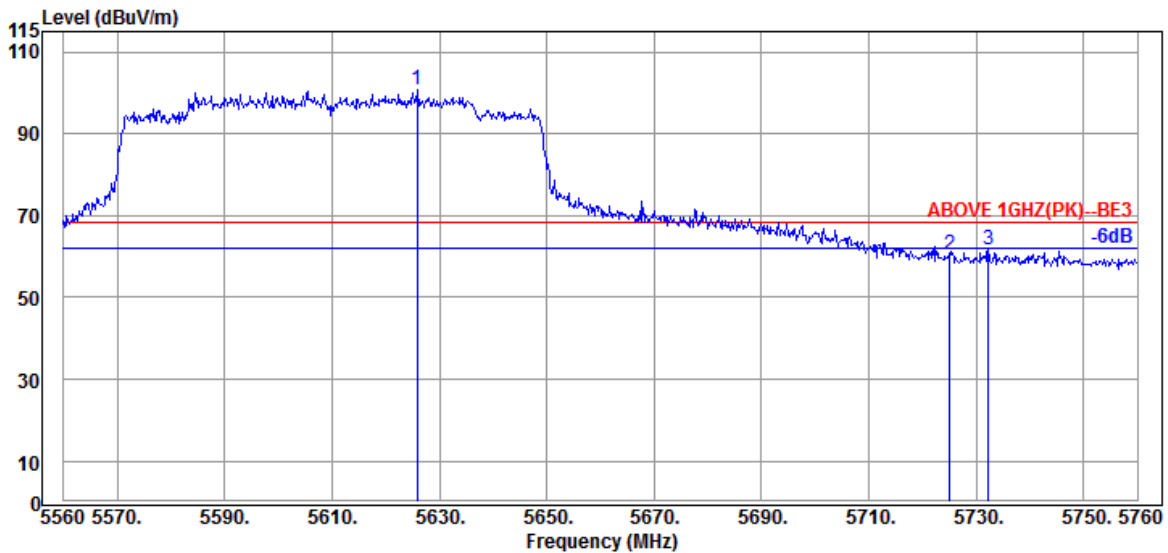


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.800	34.00	9.14	39.29	97.02	100.87	---	---	Peak
5725.000	33.80	9.20	39.30	56.68	60.38	68.20	7.82	Peak
5732.200	33.80	9.20	39.31	58.01	61.70	68.20	6.50	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

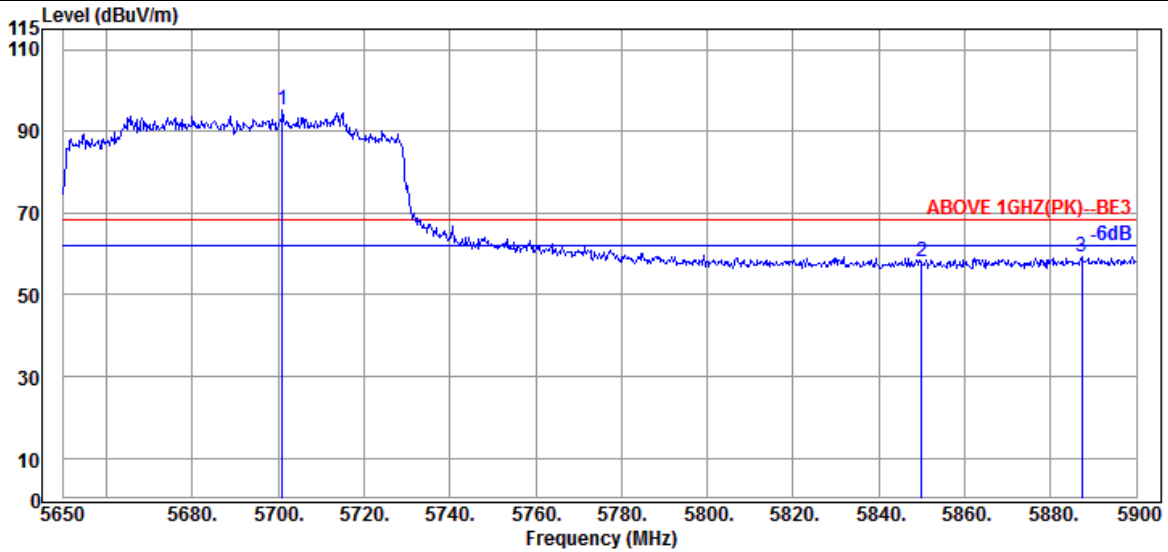

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.000	33.80	9.18	39.30	91.57	95.25	---	---	Peak
5850.000	34.10	9.25	39.33	54.01	58.03	68.20	10.17	Peak
5887.250	34.10	9.27	39.34	55.18	59.21	68.20	8.99	Peak

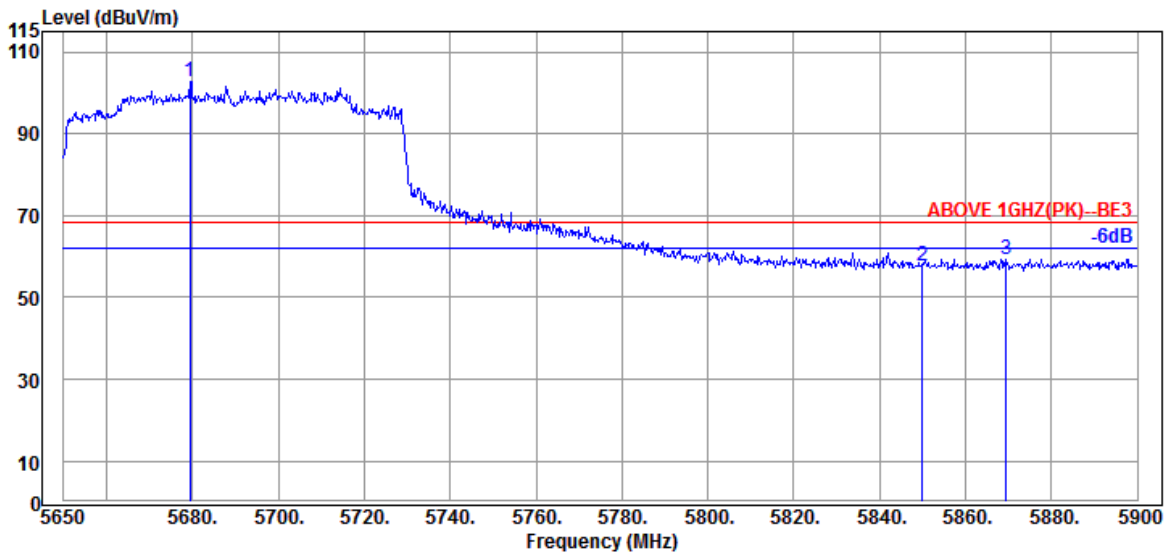


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.500	33.87	9.17	39.30	99.08	102.82	---	---	Peak
5850.000	34.10	9.25	39.33	53.81	57.83	68.20	10.37	Peak
5869.500	34.10	9.26	39.33	55.38	59.41	68.20	8.79	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

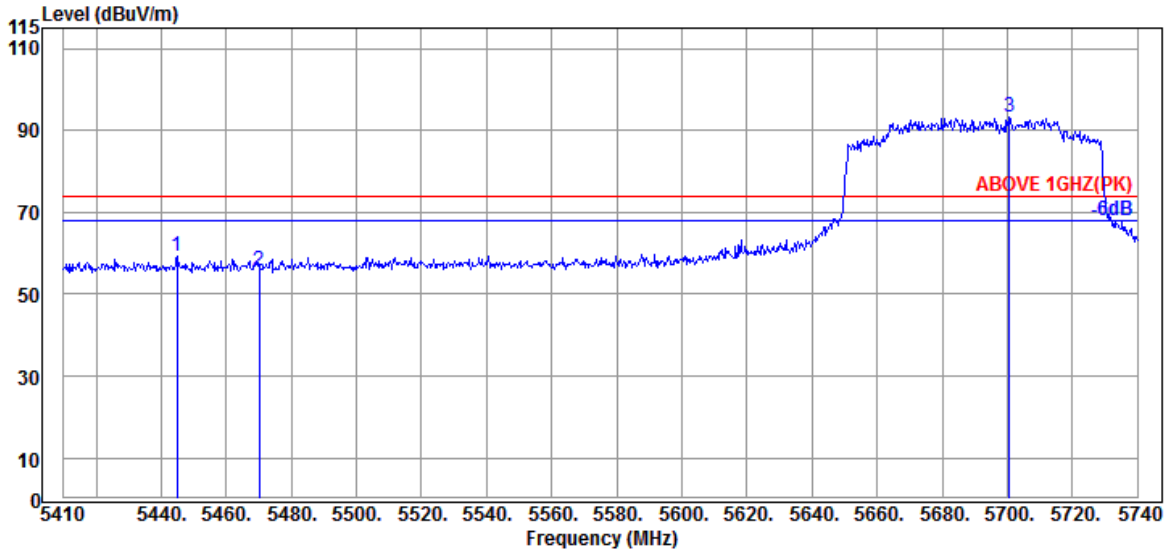

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.980	34.17	9.04	39.26	55.21	59.16	74.00	14.84	Peak
5470.060	34.17	9.06	39.26	51.81	55.78	74.00	18.22	Peak
@ 5700.730	33.80	9.18	39.30	89.46	93.14	---	---	Peak

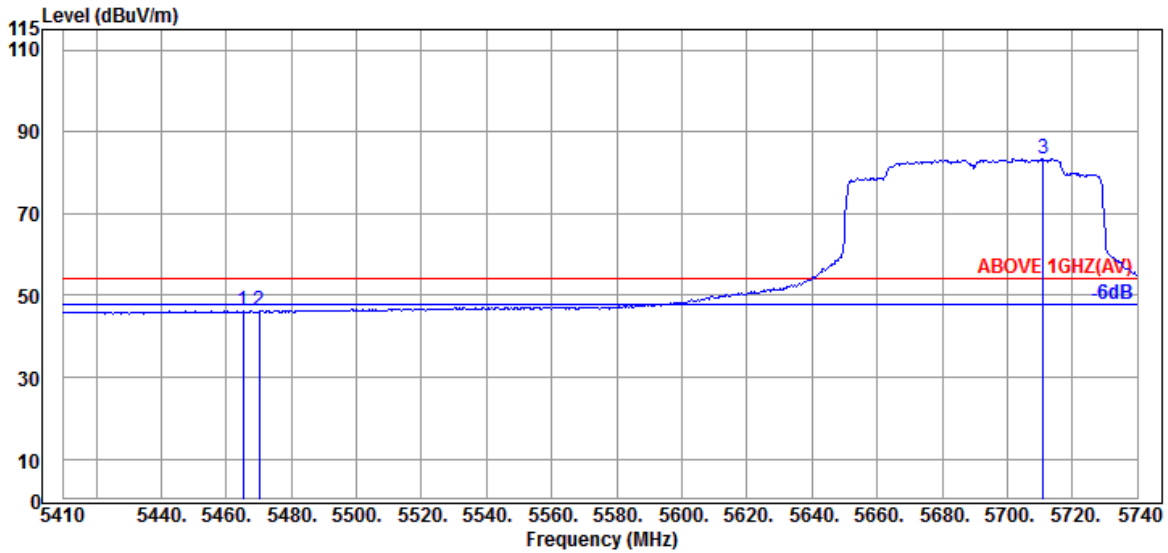


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.17	9.06	39.26	42.19	46.16	54.00	7.84	Average
5470.060	34.17	9.06	39.26	42.28	46.25	54.00	7.75	Average
@ 5710.960	33.80	9.19	39.30	79.77	83.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

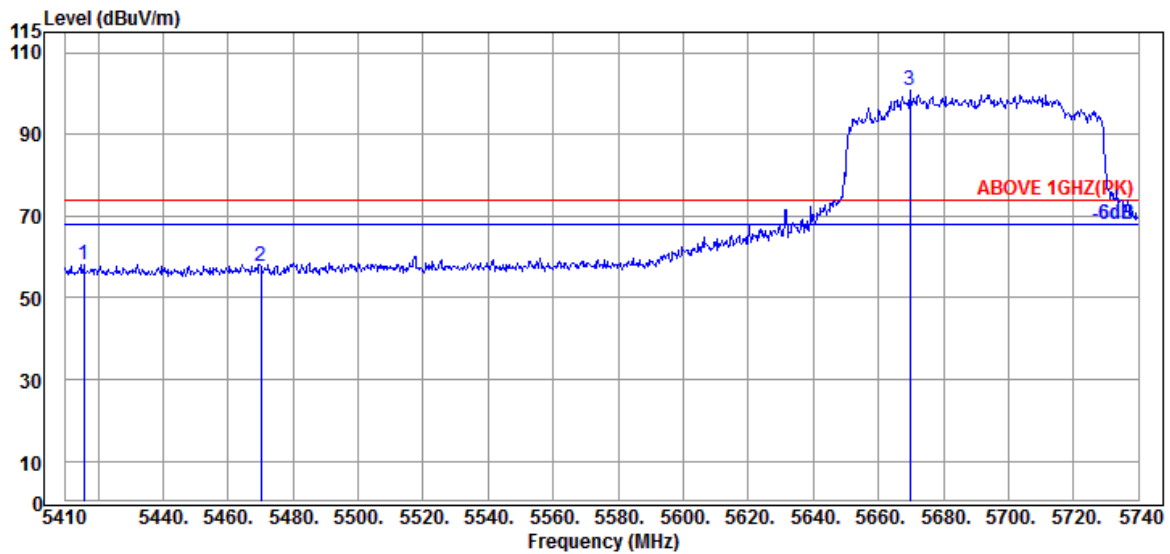

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.610	34.12	9.03	39.27	54.41	58.29	74.00	15.71	Peak
5470.060	34.17	9.06	39.26	53.58	57.55	74.00	16.45	Peak
@ 5669.710	33.93	9.16	39.29	96.79	100.59	---	---	Peak

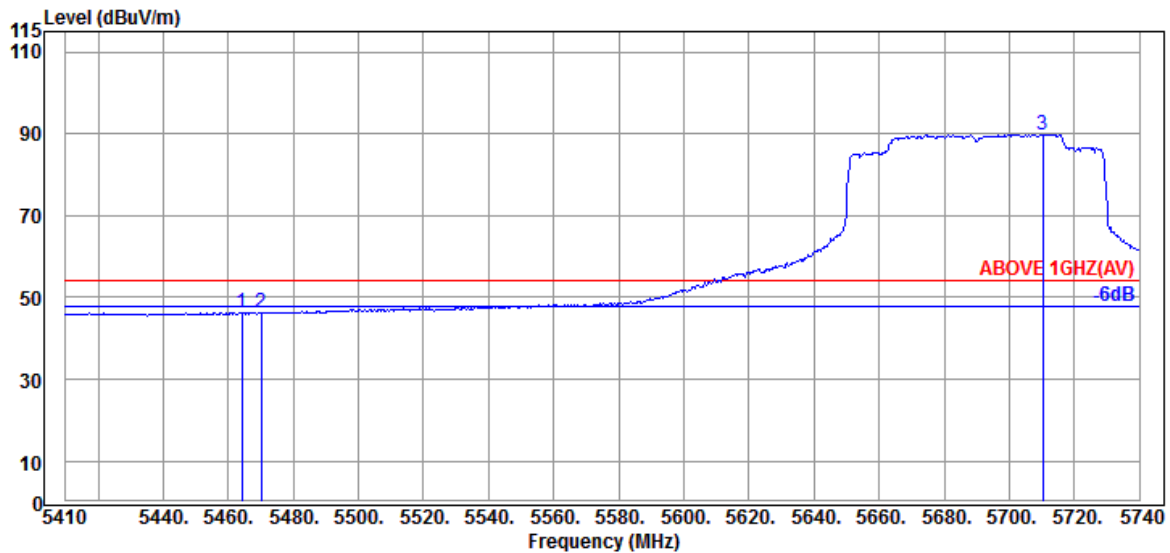


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.17	9.06	39.26	42.29	46.26	54.00	7.74	Average
5470.060	34.17	9.06	39.26	42.12	46.09	54.00	7.91	Average
@ 5710.300	33.80	9.19	39.30	86.13	89.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

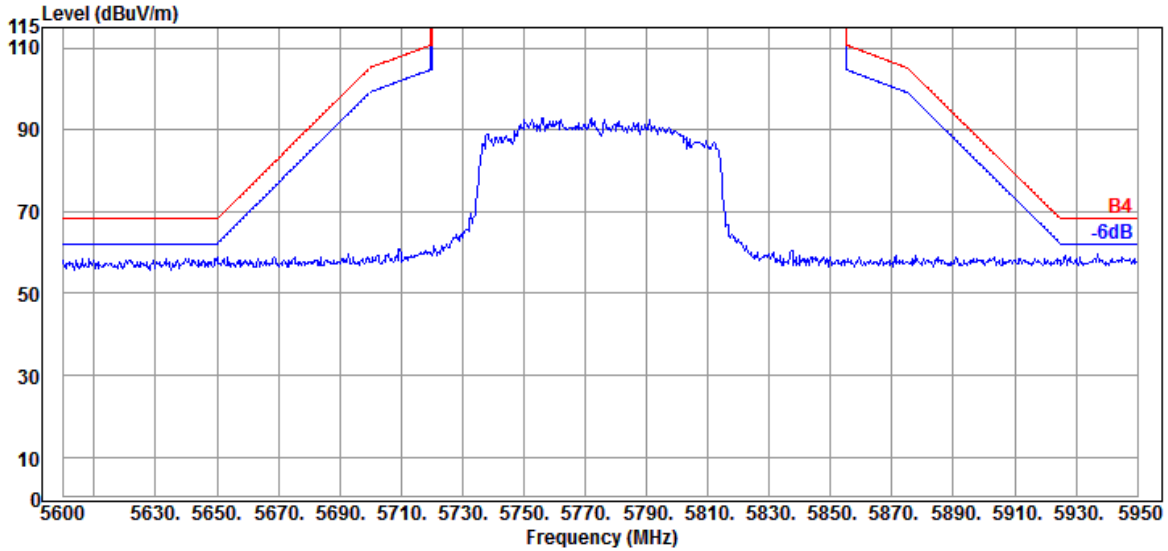

Antenna at Vertical Polarization

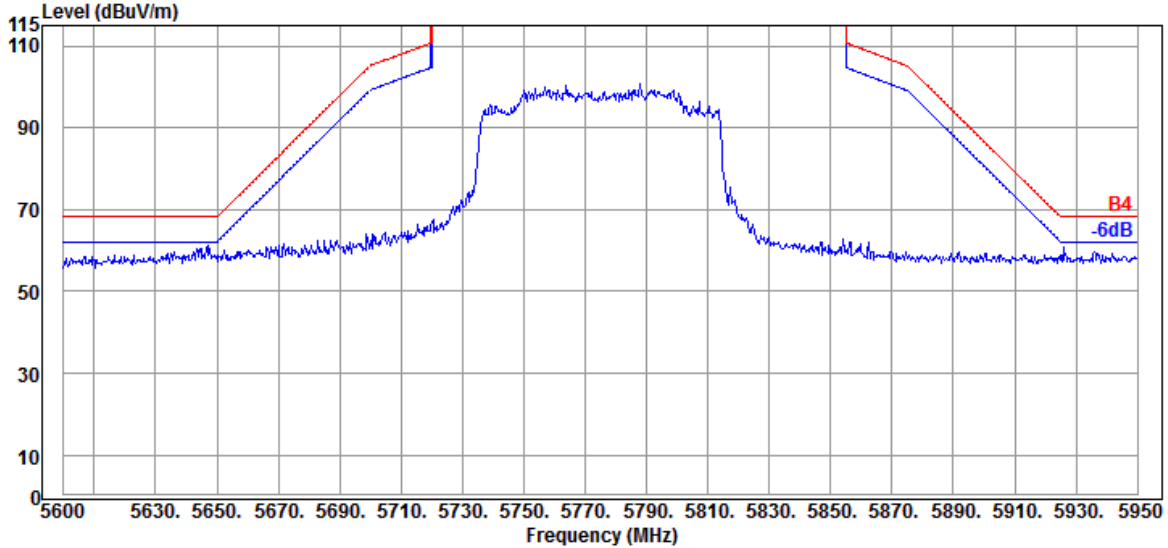


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

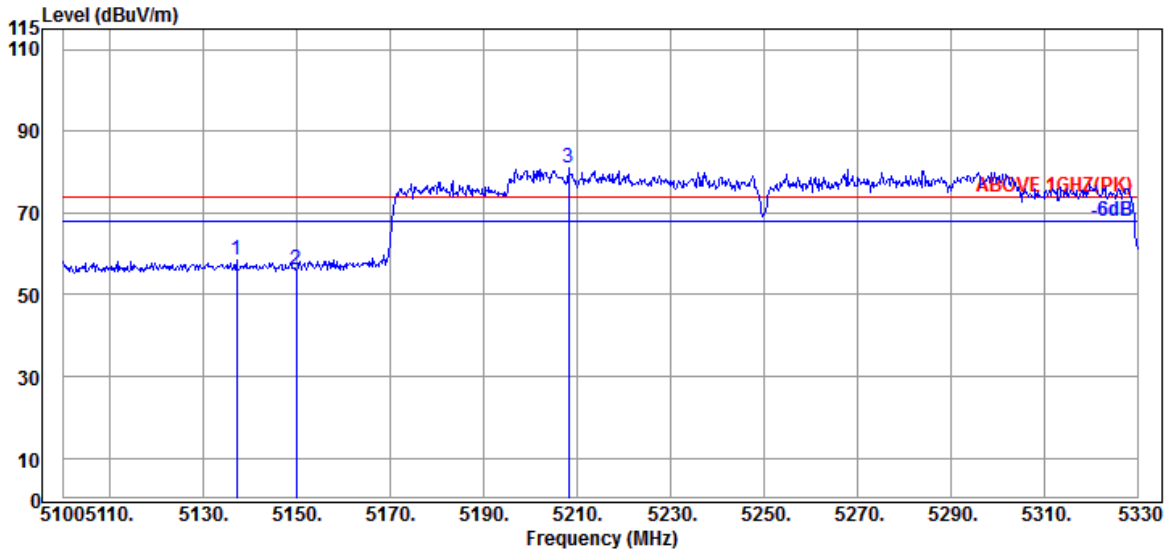

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.030	33.70	8.88	39.29	55.23	58.52	74.00	15.48	Peak
5149.910	33.70	8.88	39.29	53.00	56.29	74.00	17.71	Peak
@ 5208.100	33.72	8.92	39.28	77.68	81.04	---	---	Peak

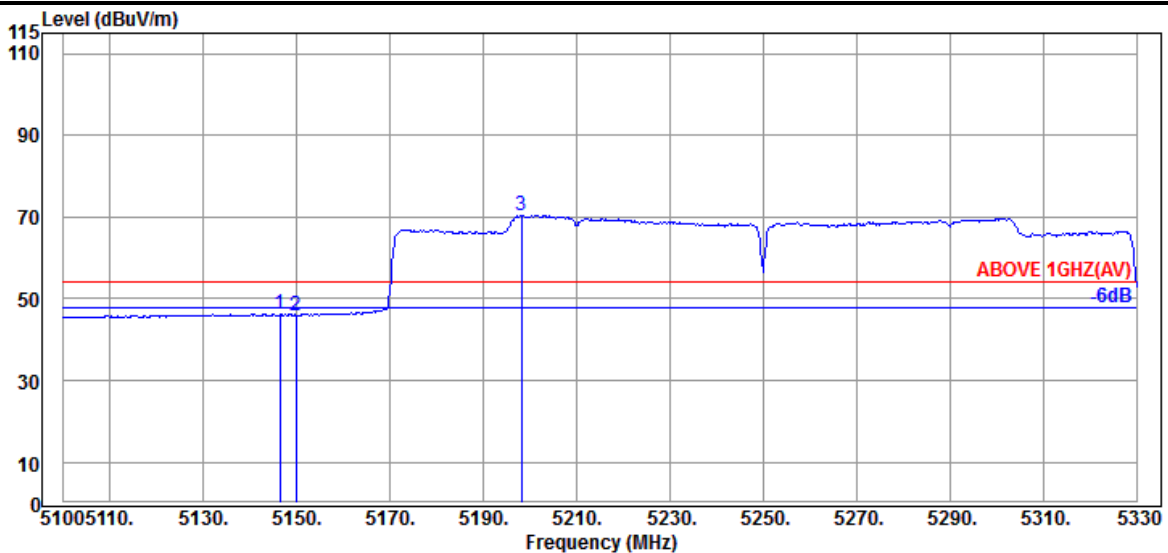


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.460	33.70	8.88	39.29	42.96	46.25	54.00	7.75	Average
5149.910	33.70	8.88	39.29	42.64	45.93	54.00	8.07	Average
@ 5198.210	33.70	8.91	39.28	67.06	70.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

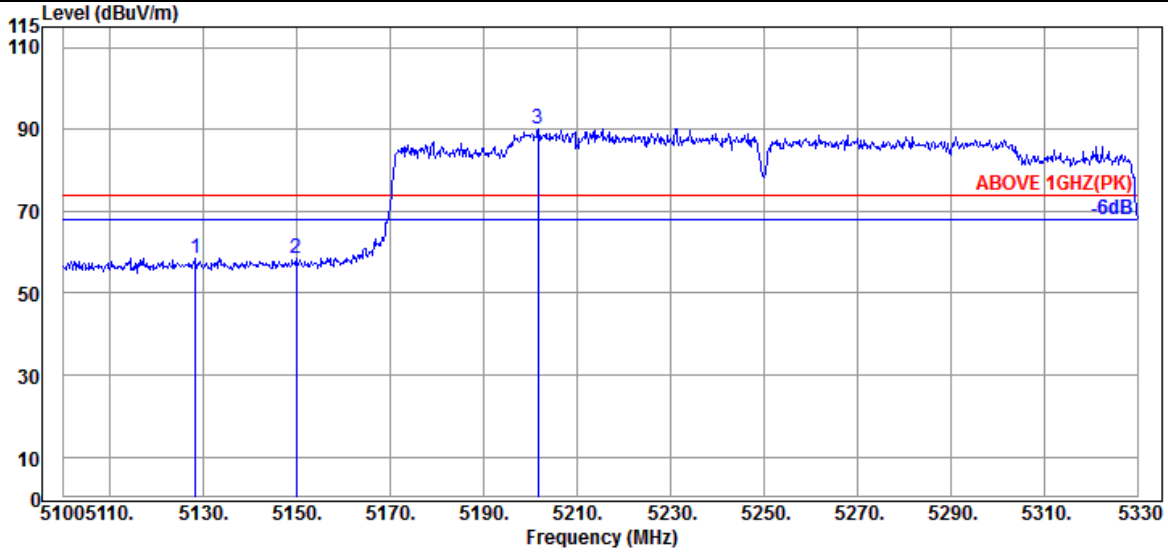

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.290	33.70	8.88	39.29	55.38	58.67	74.00	15.33	Peak
5149.910	33.70	8.88	39.29	55.03	58.32	74.00	15.68	Peak
@ 5201.660	33.72	8.92	39.28	86.63	89.99	---	---	Peak

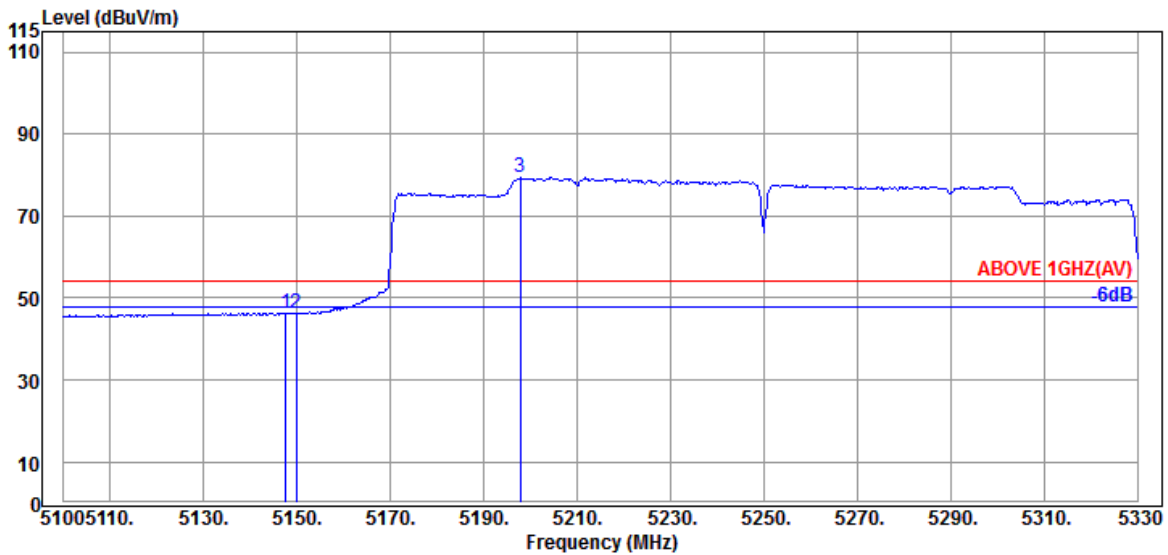


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.610	33.70	8.88	39.29	43.02	46.31	54.00	7.69	Average
5149.910	33.70	8.88	39.29	42.94	46.23	54.00	7.77	Average
@ 5197.750	33.70	8.91	39.28	75.95	79.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

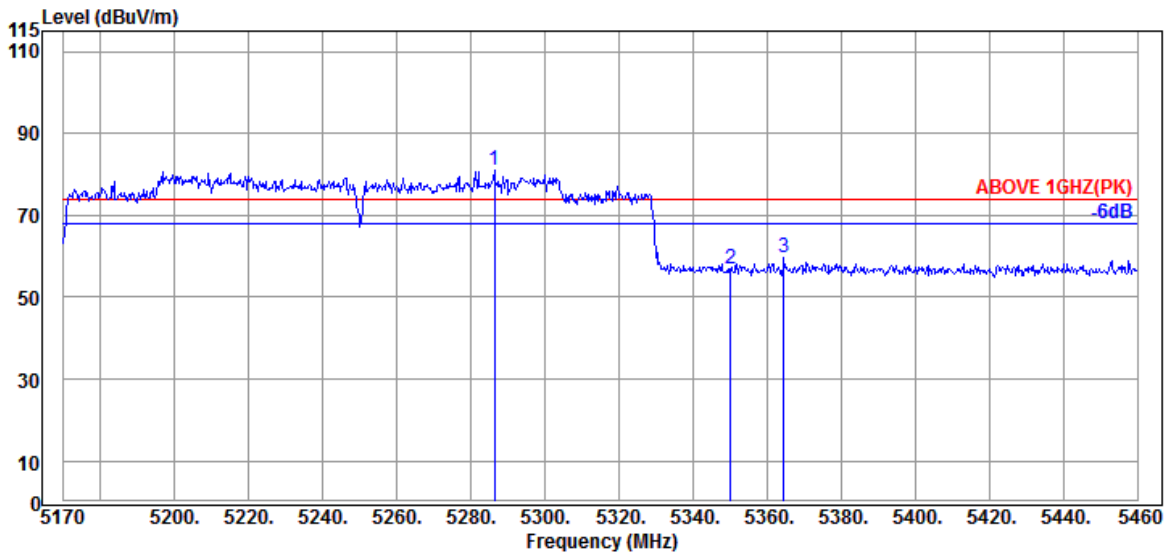

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.290	34.00	8.96	39.28	77.34	81.02	---	---	Peak
5350.090	33.90	8.99	39.27	53.23	56.85	74.00	17.15	Peak
5364.590	33.97	9.00	39.27	56.14	59.84	74.00	14.16	Peak

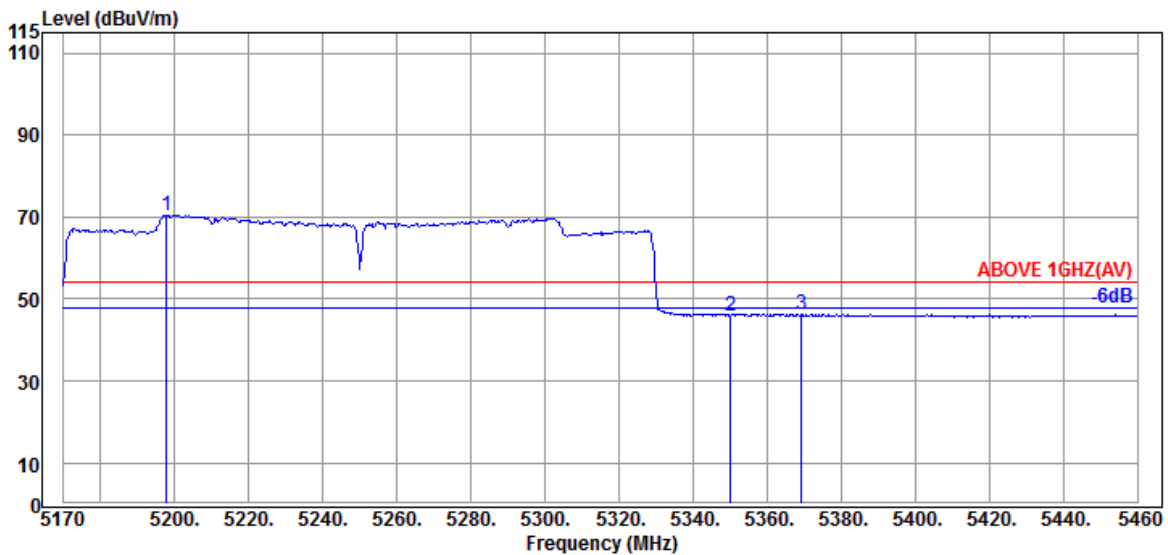


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	33.70	8.91	39.28	67.17	70.50	---	---	Average
5350.090	33.90	8.99	39.27	42.39	46.01	54.00	7.99	Average
5369.230	33.97	9.00	39.27	42.62	46.32	54.00	7.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

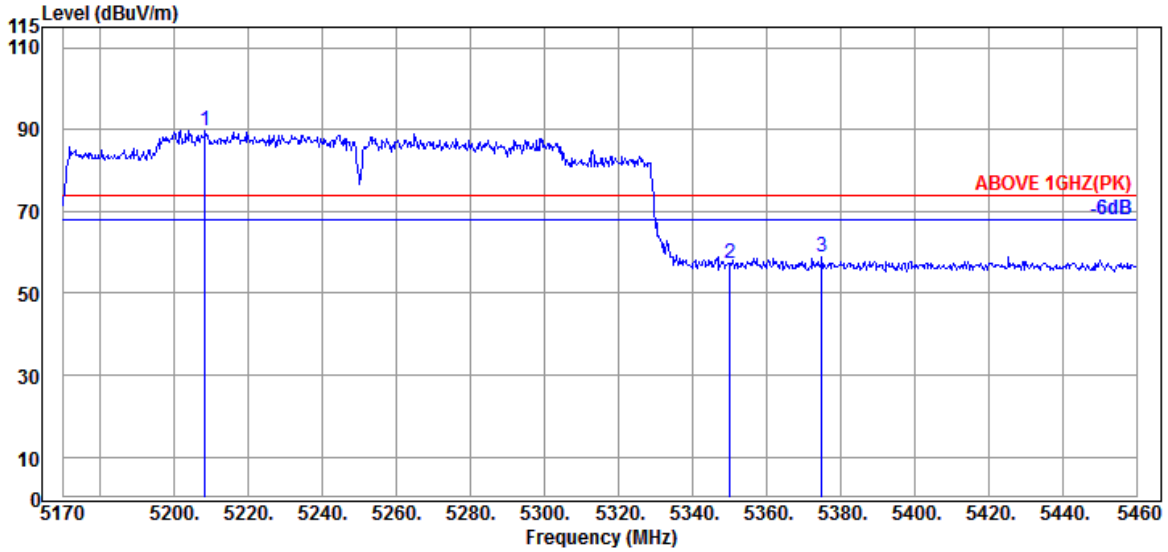

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5208.280	33.72	8.92	39.28	86.29	89.65	---	---	Peak
5350.090	33.90	8.99	39.27	53.58	57.20	74.00	16.80	Peak
5375.030	34.03	9.01	39.27	55.26	59.03	74.00	14.97	Peak

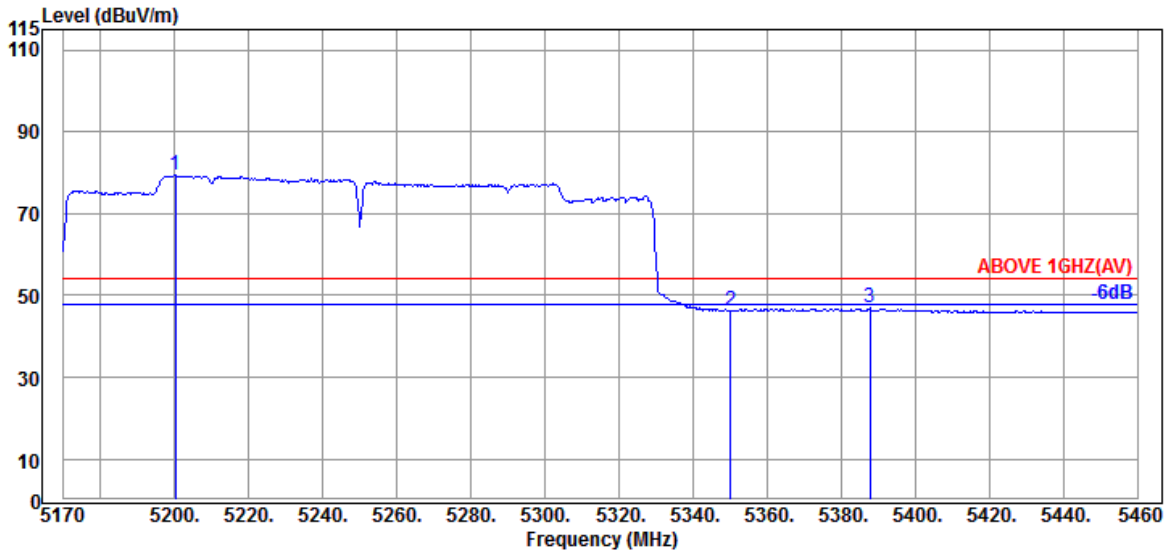


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5200.160	33.70	8.91	39.28	76.05	79.38	---	---	Average
5350.090	33.90	8.99	39.27	42.75	46.37	54.00	7.63	Average
5387.790	34.10	9.02	39.27	43.05	46.90	54.00	7.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

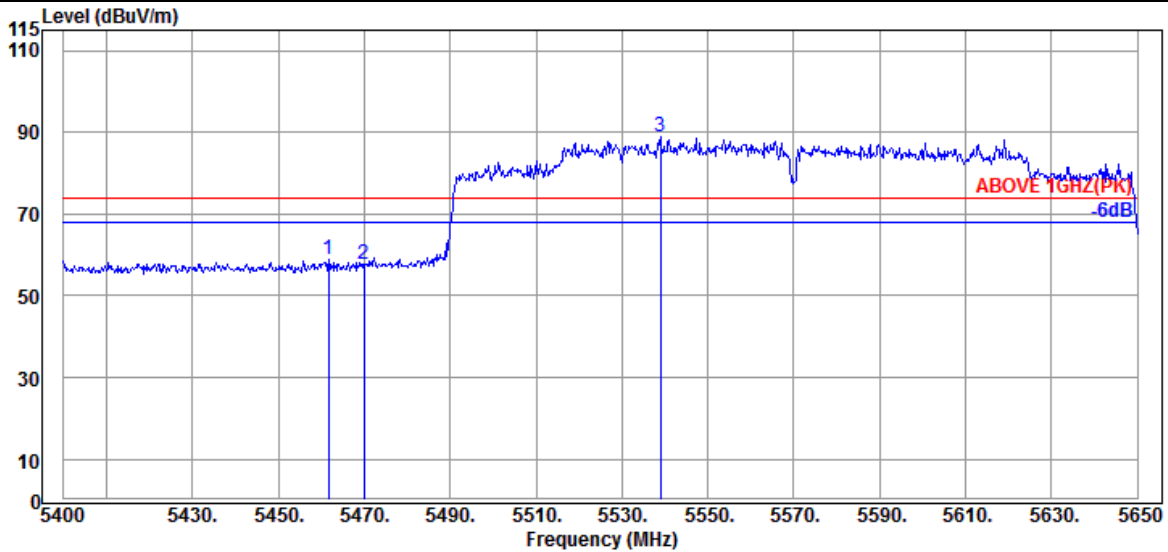

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.750	34.20	9.05	39.26	54.85	58.84	74.00	15.16	Peak
5470.000	34.17	9.06	39.26	53.59	57.56	74.00	16.44	Peak
@ 5539.000	34.10	9.09	39.27	85.11	89.03	---	---	Peak

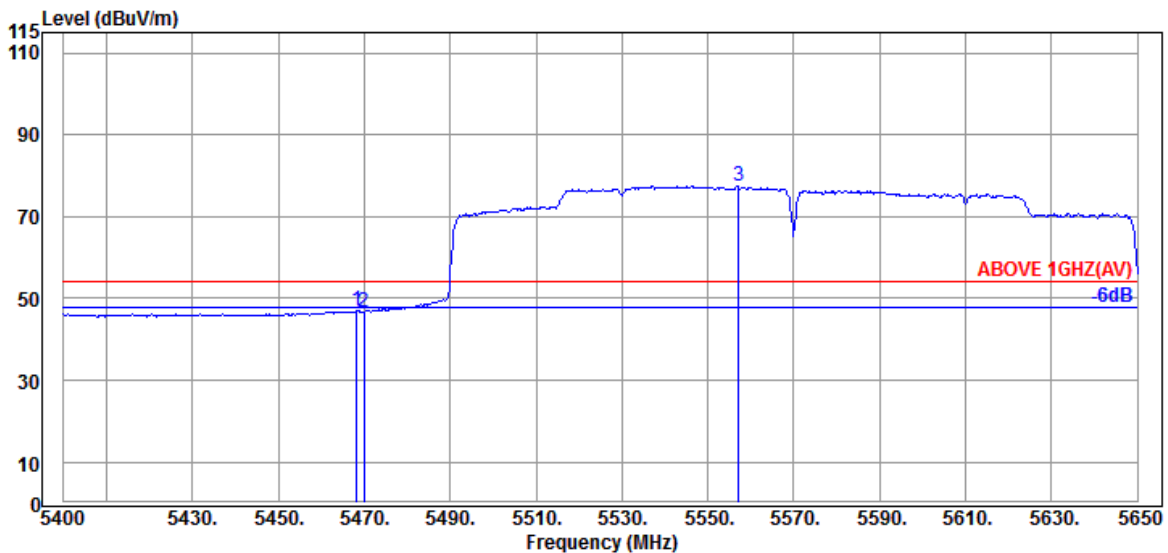


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.17	9.06	39.26	43.08	47.05	54.00	6.95	Average
5470.000	34.17	9.06	39.26	42.77	46.74	54.00	7.26	Average
@ 5557.250	34.10	9.10	39.27	73.53	77.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

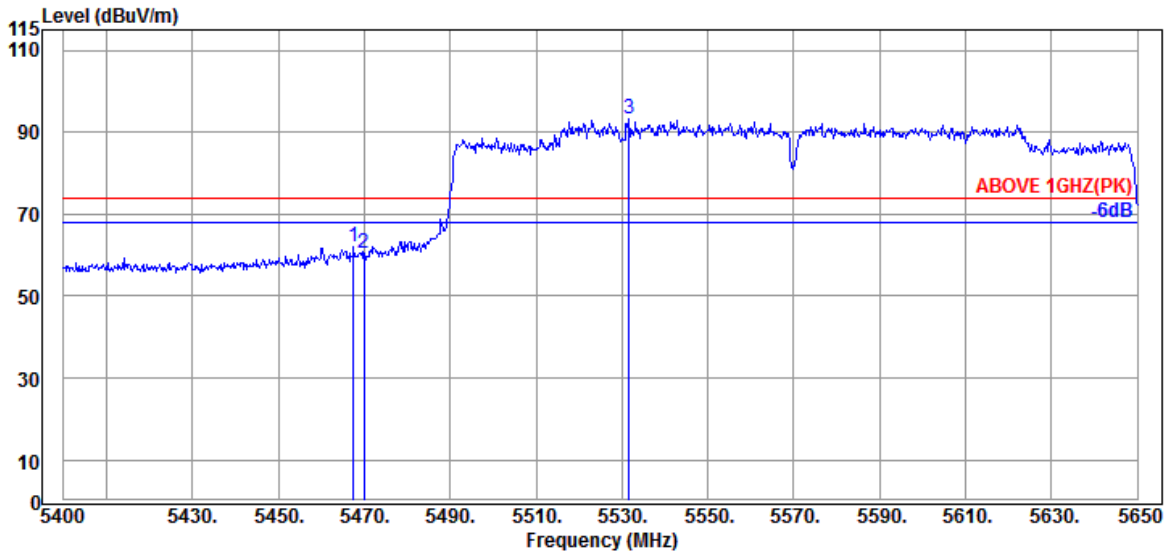

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.17	9.06	39.26	57.95	61.92	74.00	12.08	Peak
5470.000	34.17	9.06	39.26	56.33	60.30	74.00	13.70	Peak
@ 5531.750	34.10	9.09	39.27	89.17	93.09	---	---	Peak

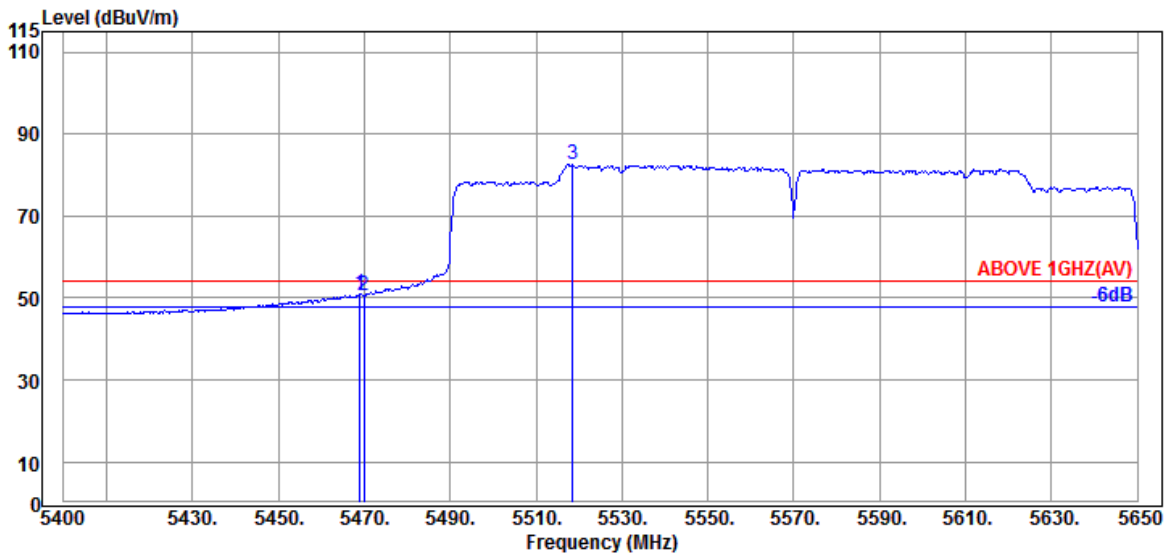


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	46.88	50.85	54.00	3.15	Average
5470.000	34.17	9.06	39.26	46.48	50.45	54.00	3.55	Average
@ 5518.500	34.10	9.09	39.26	78.56	82.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

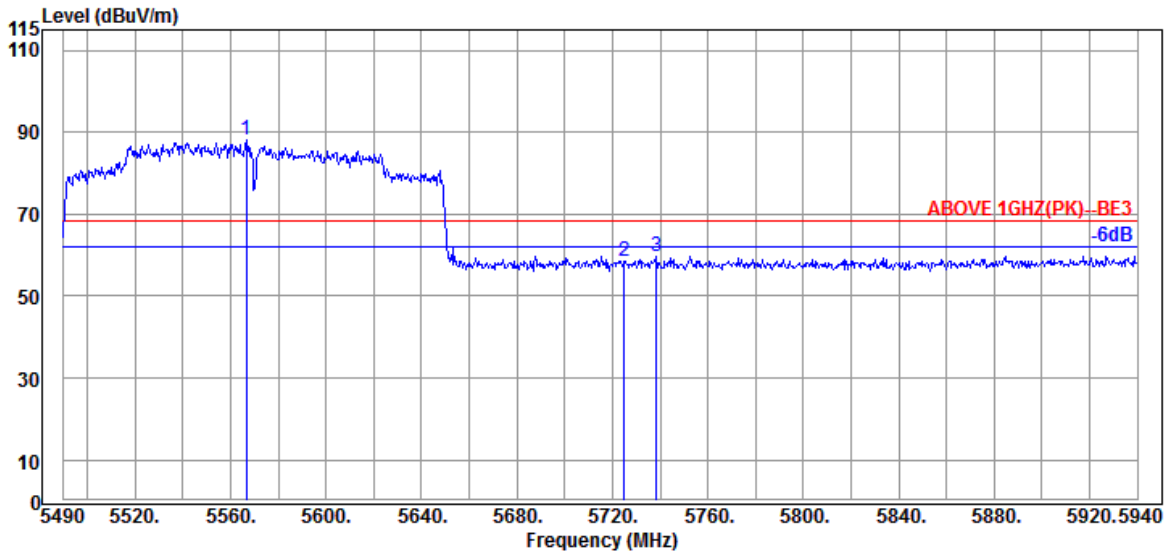

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5566.500	34.07	9.11	39.27	84.05	87.96	---	---	Peak
5724.900	33.80	9.20	39.30	54.93	58.63	68.20	9.57	Peak
5738.400	33.80	9.20	39.31	56.05	59.74	68.20	8.46	Peak

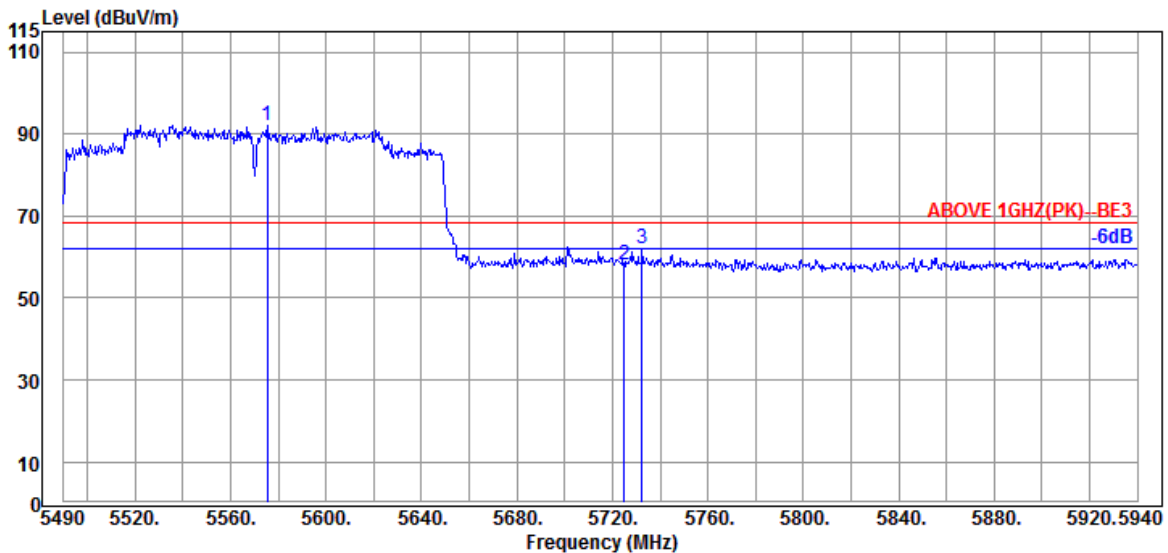


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5575.500	34.03	9.12	39.27	88.36	92.24	---	---	Peak
5724.900	33.80	9.20	39.30	54.51	58.21	68.20	9.99	Peak
5732.550	33.80	9.20	39.31	58.23	61.92	68.20	6.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

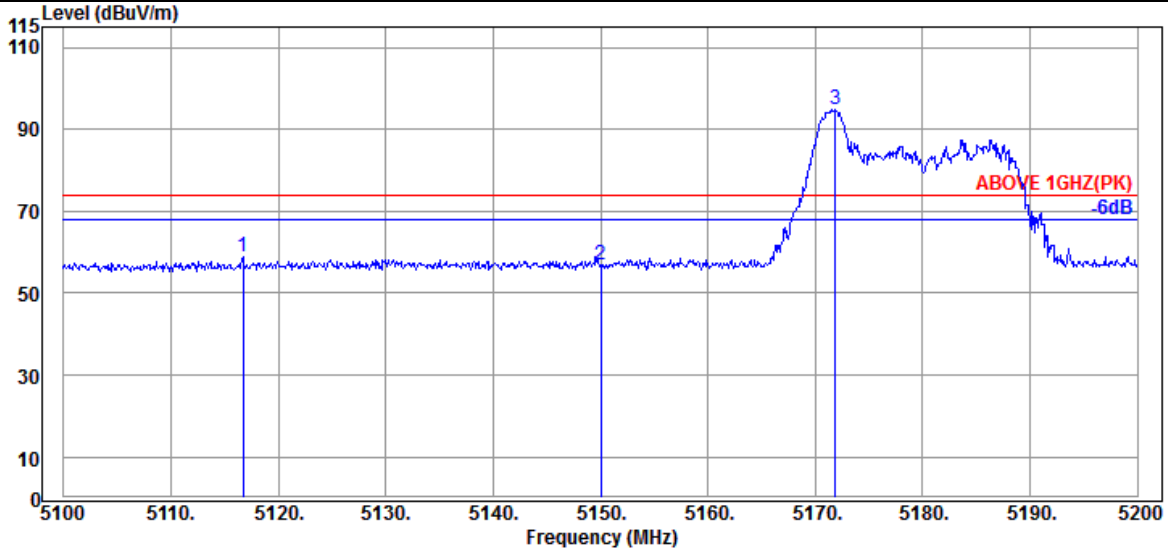

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.700	33.70	8.87	39.29	55.58	58.86	74.00	15.14	Peak
5150.000	33.70	8.88	39.29	53.43	56.72	74.00	17.28	Peak
@ 5171.900	33.70	8.90	39.29	91.64	94.95	---	---	Peak

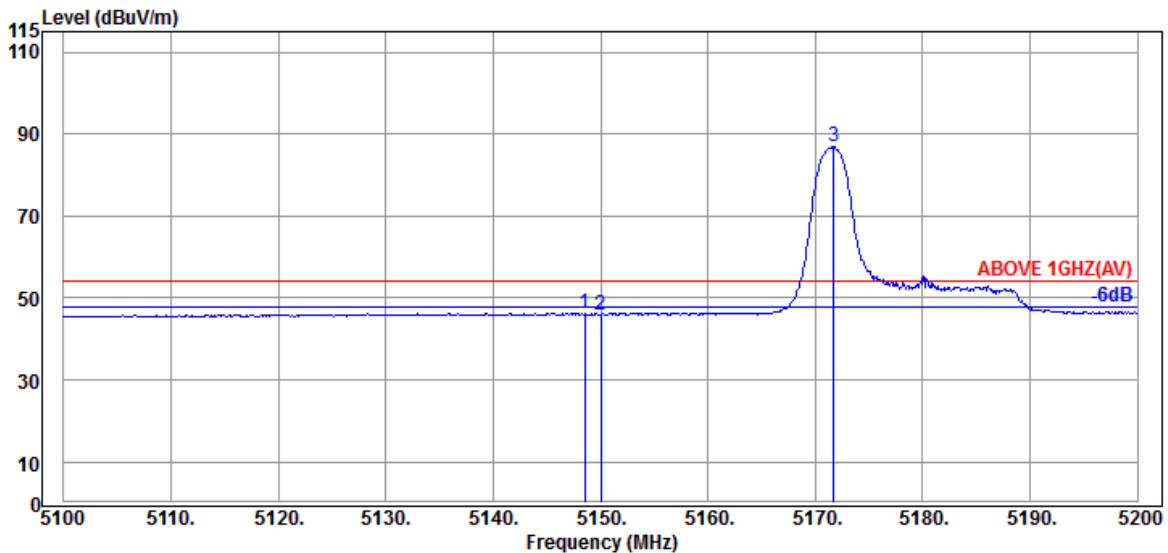


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.88	39.29	42.90	46.19	54.00	7.81	Average
5150.000	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5171.700	33.70	8.90	39.29	83.57	86.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

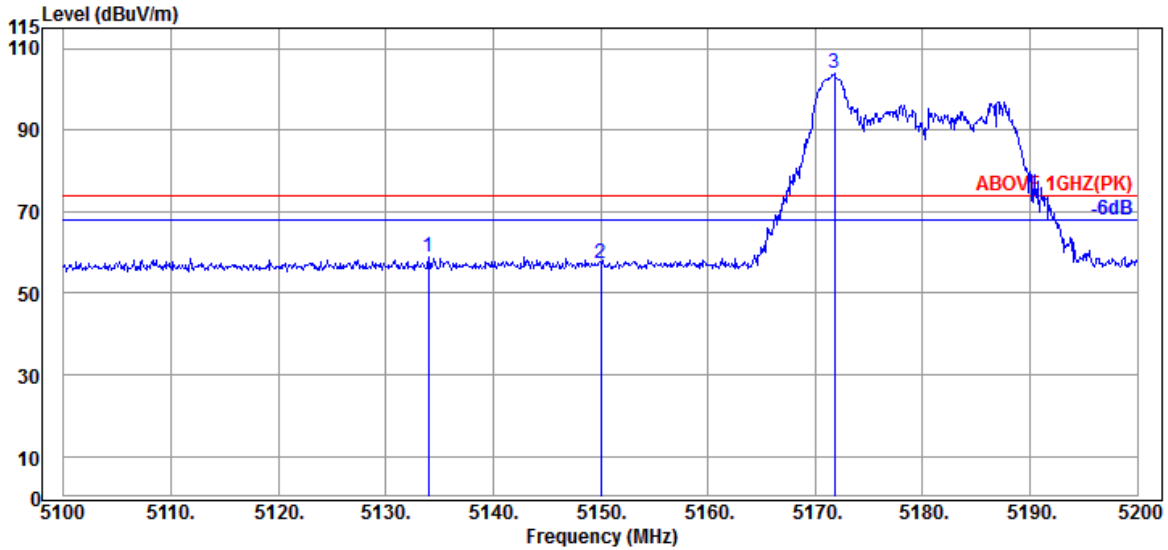

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.000	33.70	8.88	39.29	55.57	58.86	74.00	15.14	Peak
5150.000	33.70	8.88	39.29	53.96	57.25	74.00	16.75	Peak
@ 5171.800	33.70	8.90	39.29	100.44	103.75	---	---	Peak

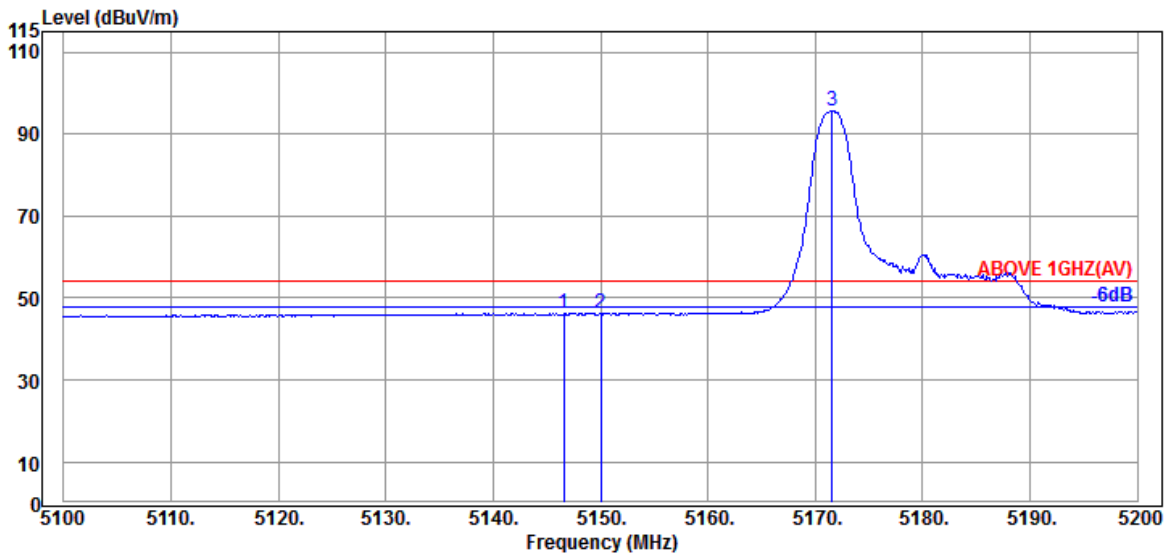


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.70	8.88	39.29	42.99	46.28	54.00	7.72	Average
5150.000	33.70	8.88	39.29	42.91	46.20	54.00	7.80	Average
@ 5171.600	33.70	8.90	39.29	92.43	95.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

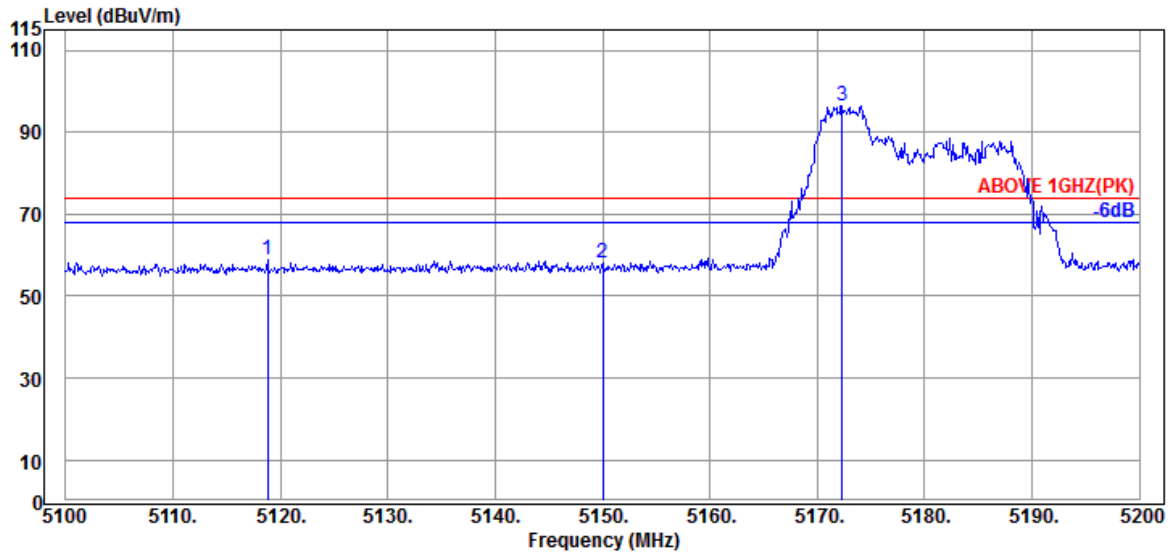

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.800	33.70	8.87	39.29	55.68	58.96	74.00	15.04	Peak
5150.000	33.70	8.88	39.29	54.65	57.94	74.00	16.06	Peak
@ 5172.300	33.70	8.90	39.29	93.26	96.57	---	---	Peak

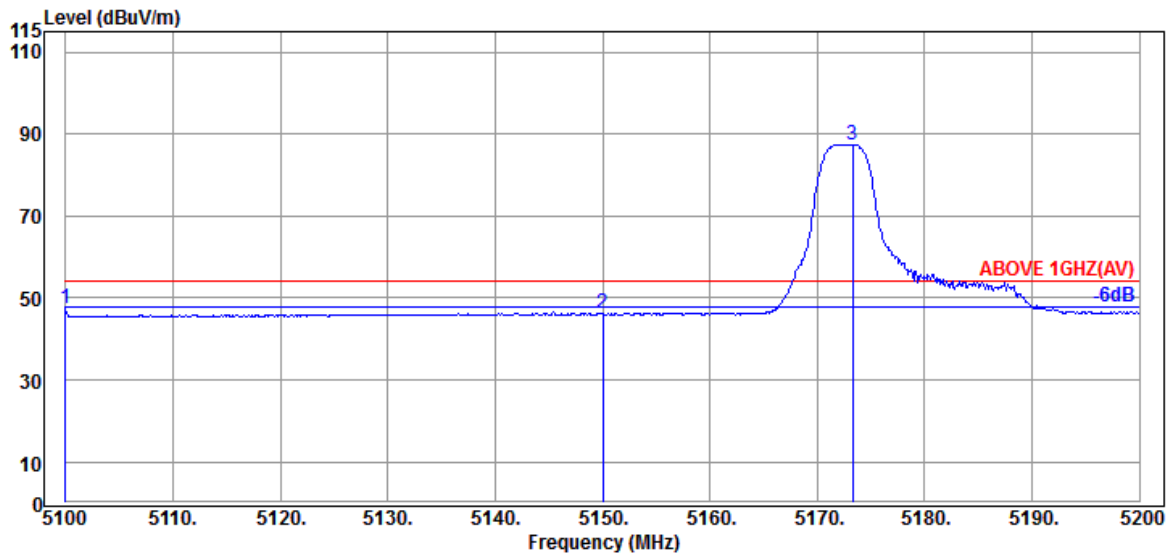


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	33.70	8.86	39.29	44.29	47.64	54.00	6.36	Average
5150.000	33.70	8.88	39.29	42.88	47.31	54.00	6.69	Average
@ 5173.300	33.70	8.90	39.28	84.18	97.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

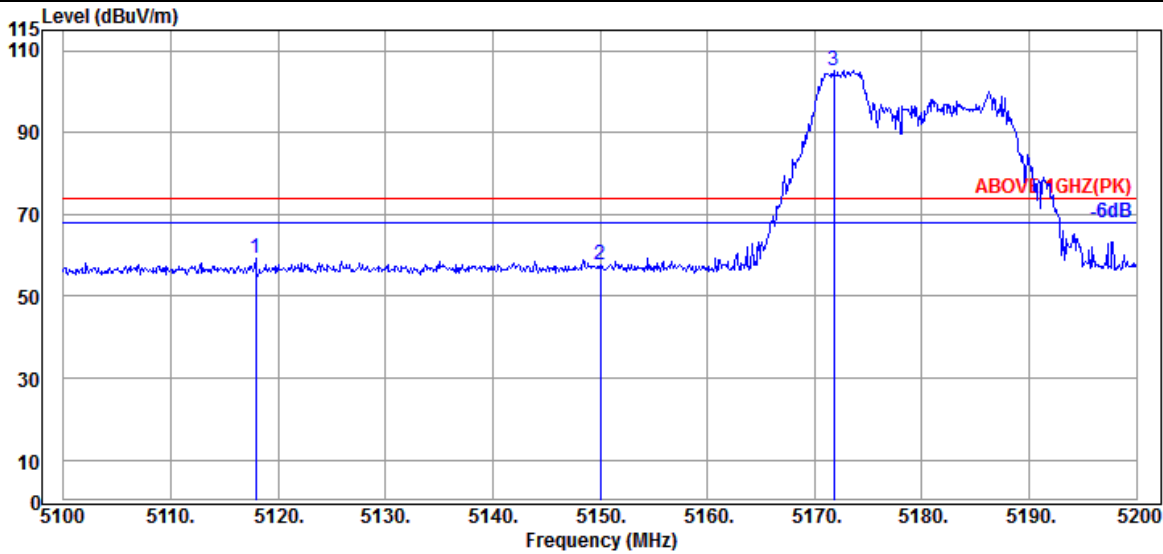

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.900	33.70	8.87	39.29	55.93	59.21	74.00	14.79	Peak
5150.000	33.70	8.88	39.29	54.39	57.68	74.00	16.32	Peak
@ 5171.800	33.70	8.90	39.29	101.96	105.27	---	---	Peak

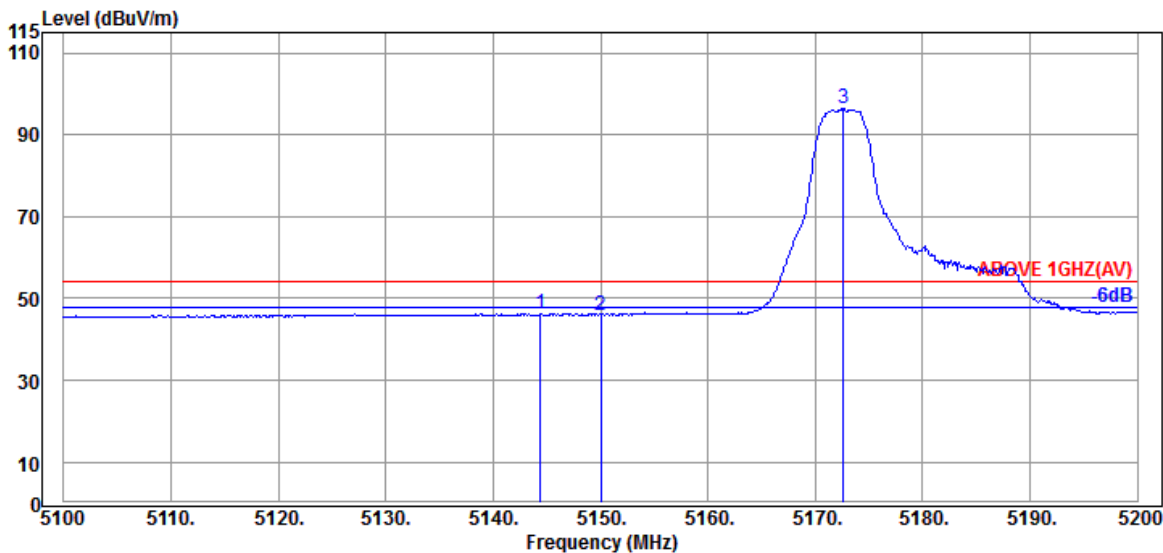


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	33.70	8.88	39.29	42.93	46.22	54.00	7.78	Average
5150.000	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5172.600	33.70	8.90	39.29	93.03	96.34	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

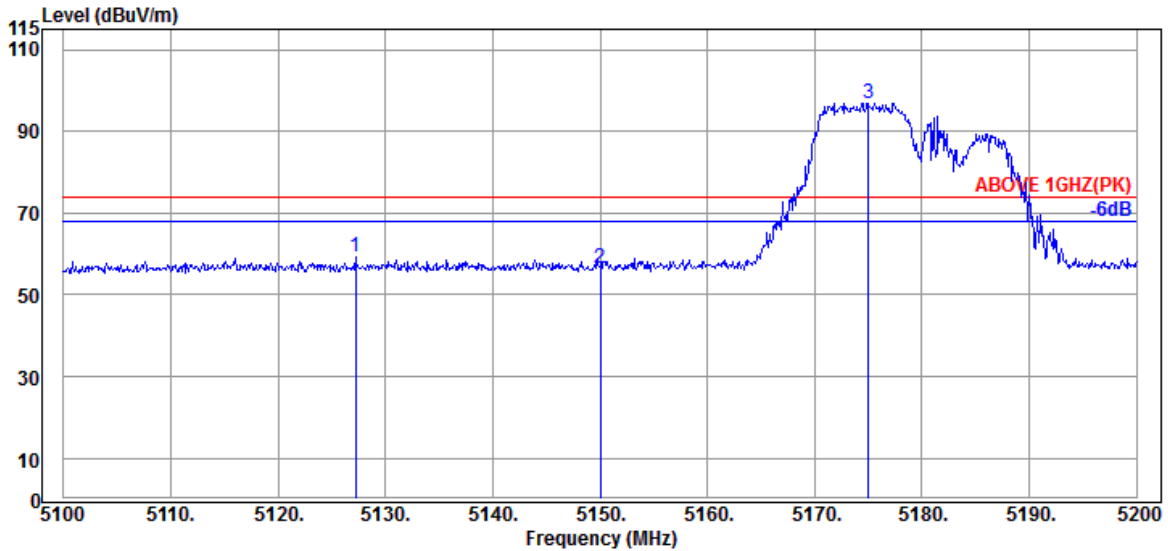

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.200	33.70	8.88	39.29	55.85	59.14	74.00	14.86	Peak
5150.000	33.70	8.88	39.29	53.20	56.49	74.00	17.51	Peak
@ 5175.000	33.70	8.90	39.28	93.58	96.90	---	---	Peak

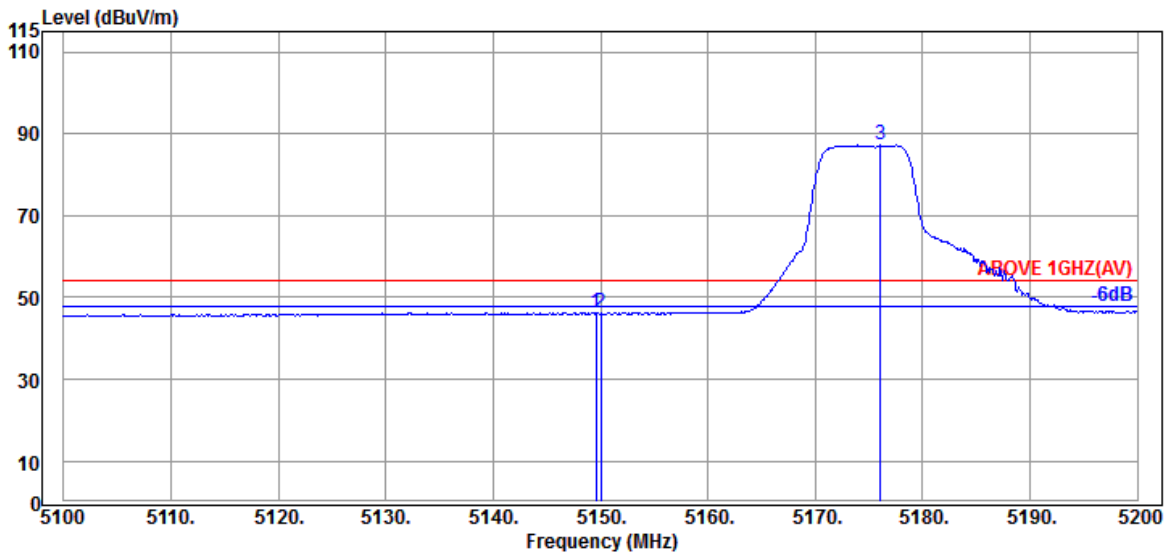


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.88	39.29	42.96	46.25	54.00	7.75	Average
5150.000	33.70	8.88	39.29	42.81	46.10	54.00	7.90	Average
@ 5176.100	33.70	8.90	39.28	83.90	87.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

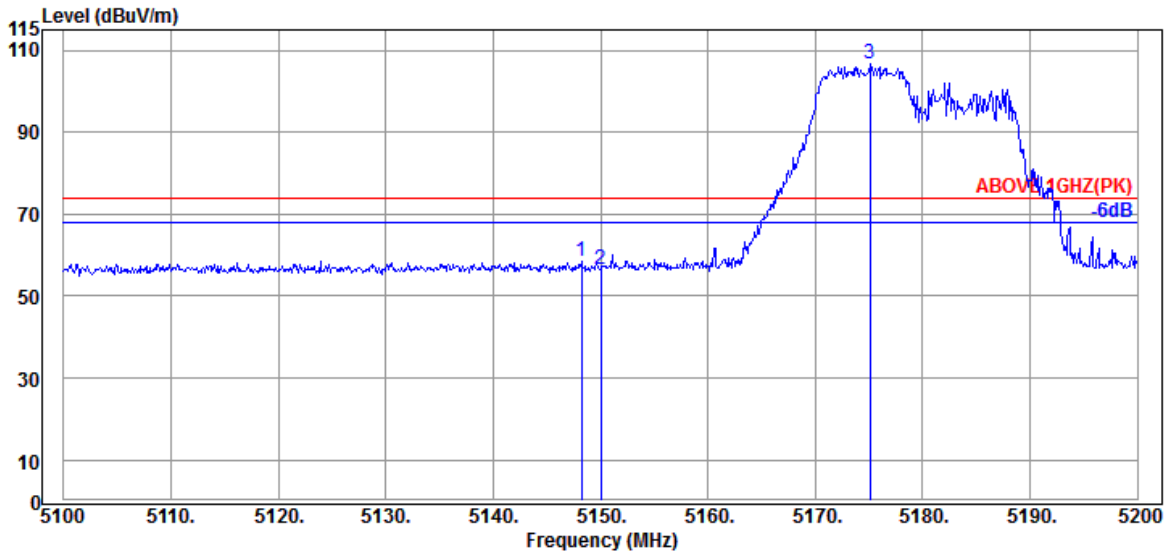

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.70	8.88	39.29	55.18	58.47	74.00	15.53	Peak
5150.000	33.70	8.88	39.29	53.19	56.48	74.00	17.52	Peak
@ 5175.100	33.70	8.90	39.28	103.35	106.67	---	---	Peak

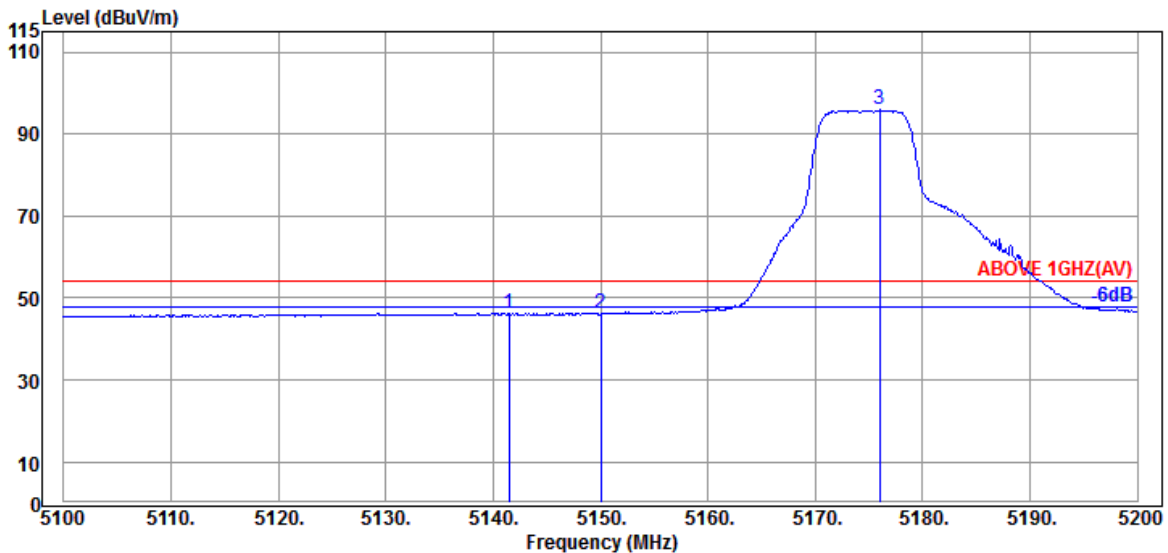


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.500	33.70	8.88	39.29	43.07	46.36	54.00	7.64	Average
5150.000	33.70	8.88	39.29	42.81	46.10	54.00	7.90	Average
@ 5176.000	33.70	8.90	39.28	92.51	95.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

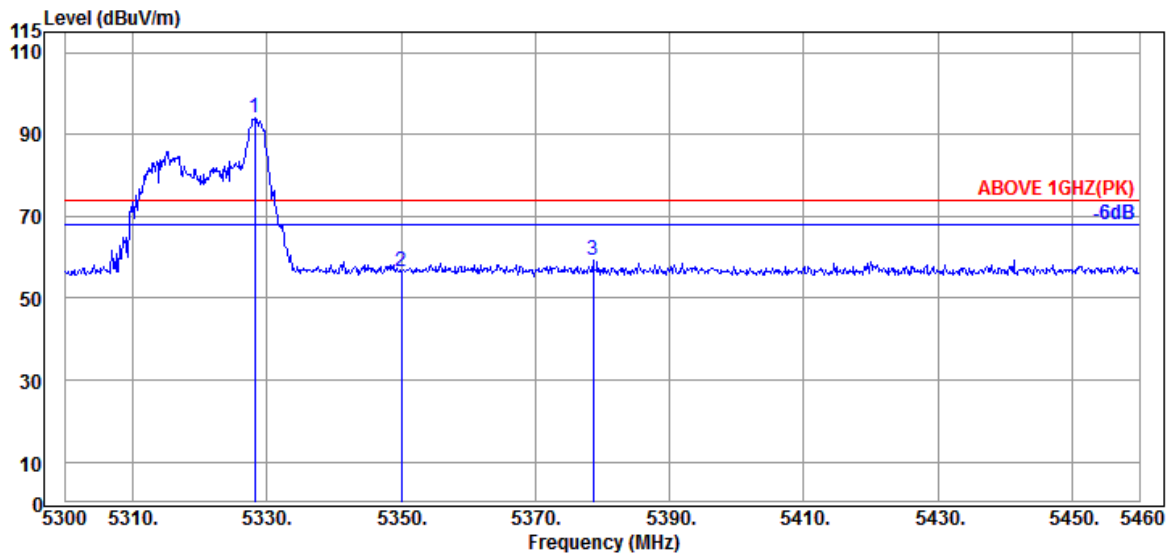

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	33.97	8.99	39.27	90.30	93.99	---	---	Peak
5350.080	33.90	8.99	39.27	52.98	56.60	74.00	17.40	Peak
5378.560	34.03	9.01	39.27	55.67	59.44	74.00	14.56	Peak

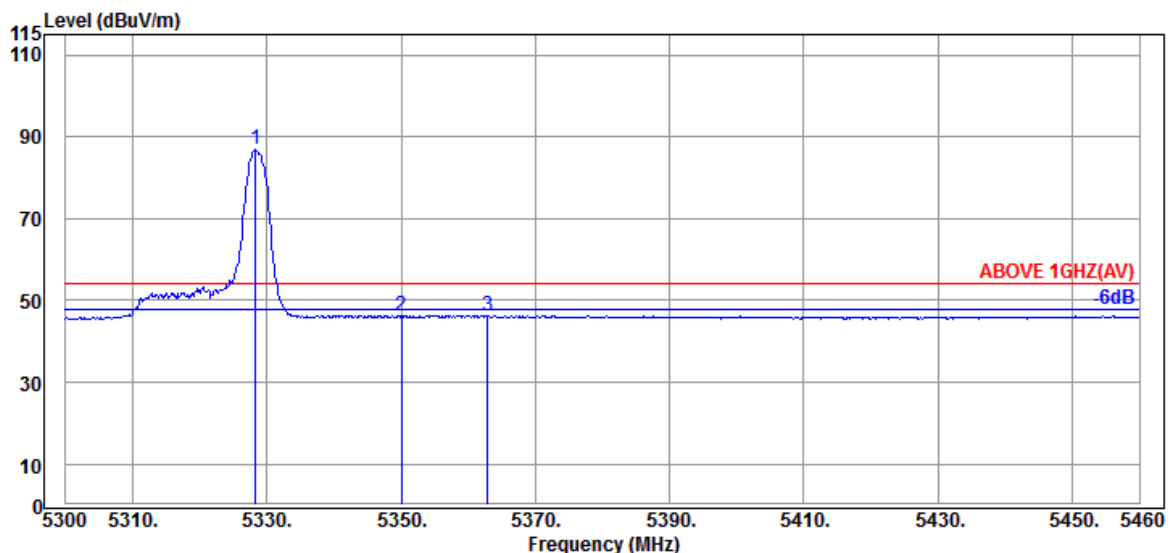


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	83.24	86.93	---	---	Average
5350.080	33.90	8.99	39.27	42.48	46.10	54.00	7.90	Average
5362.880	33.97	9.00	39.27	42.65	46.35	54.00	7.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

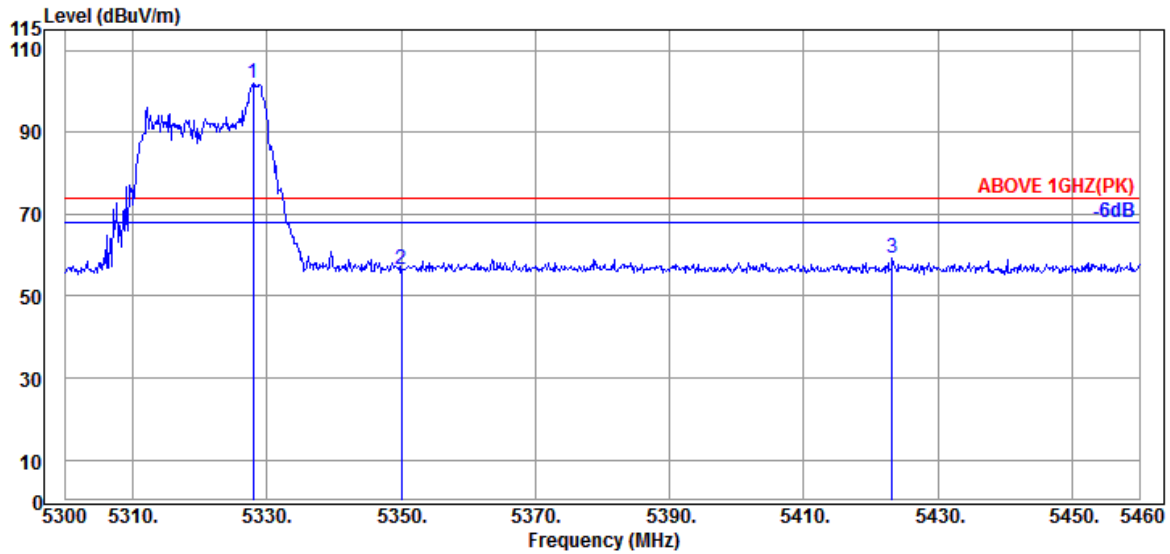

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.97	8.99	39.27	98.29	101.98	---	---	Peak
5350.080	33.90	8.99	39.27	53.06	56.68	74.00	17.32	Peak
5423.200	34.15	9.04	39.27	55.32	59.24	74.00	14.76	Peak

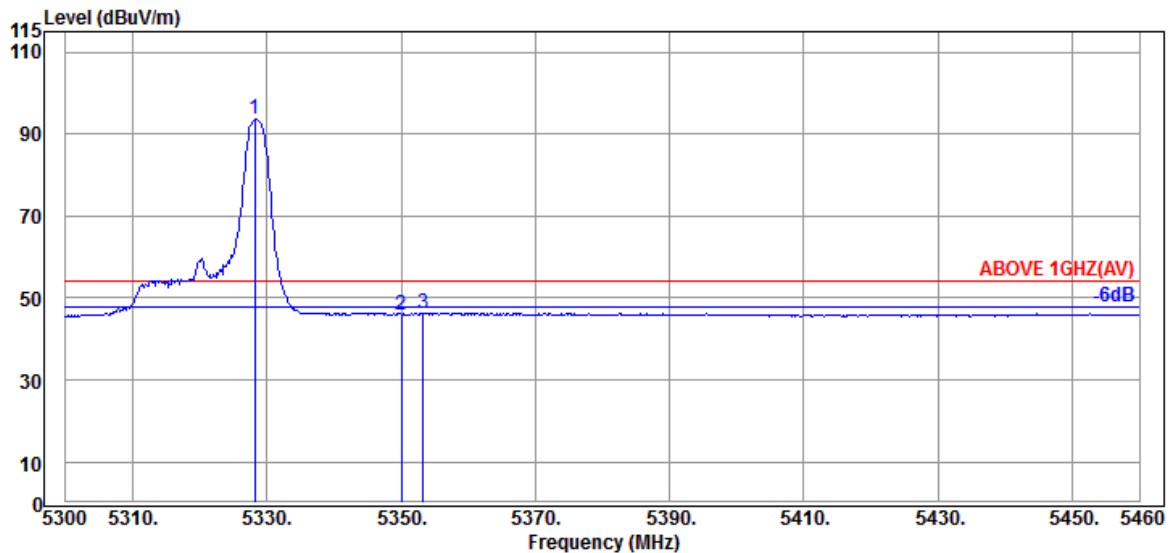


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	33.97	8.99	39.27	89.93	93.62	---	---	Average
5350.080	33.90	8.99	39.27	42.31	45.93	54.00	8.07	Average
5353.280	33.90	8.99	39.27	42.67	46.29	54.00	7.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

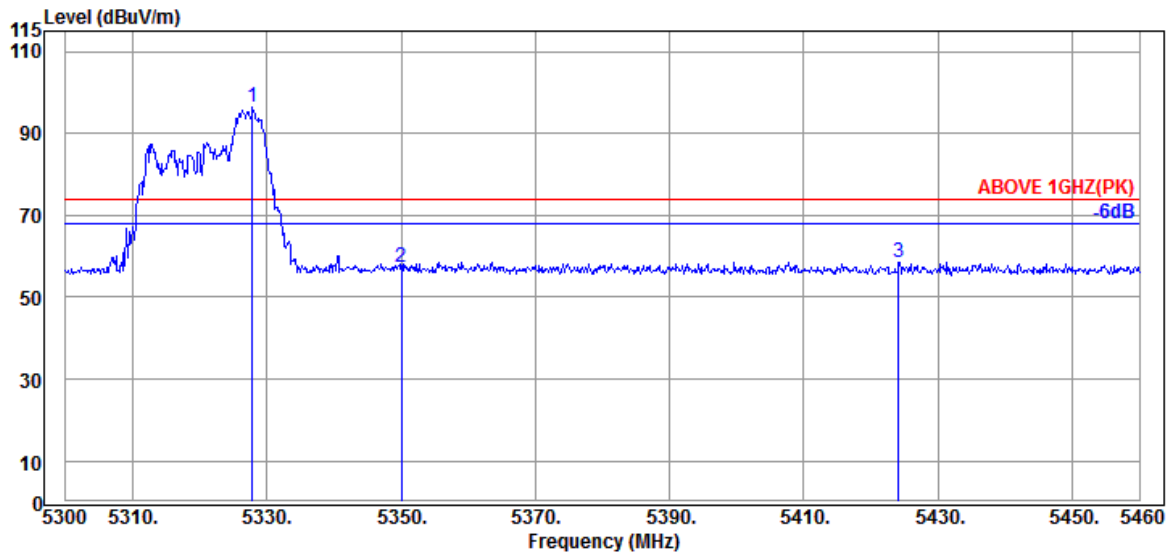

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.97	8.99	39.27	92.86	96.55	---	---	Peak
5350.080	33.90	8.99	39.27	53.83	57.45	74.00	16.55	Peak
5424.160	34.15	9.04	39.27	54.75	58.67	74.00	15.33	Peak

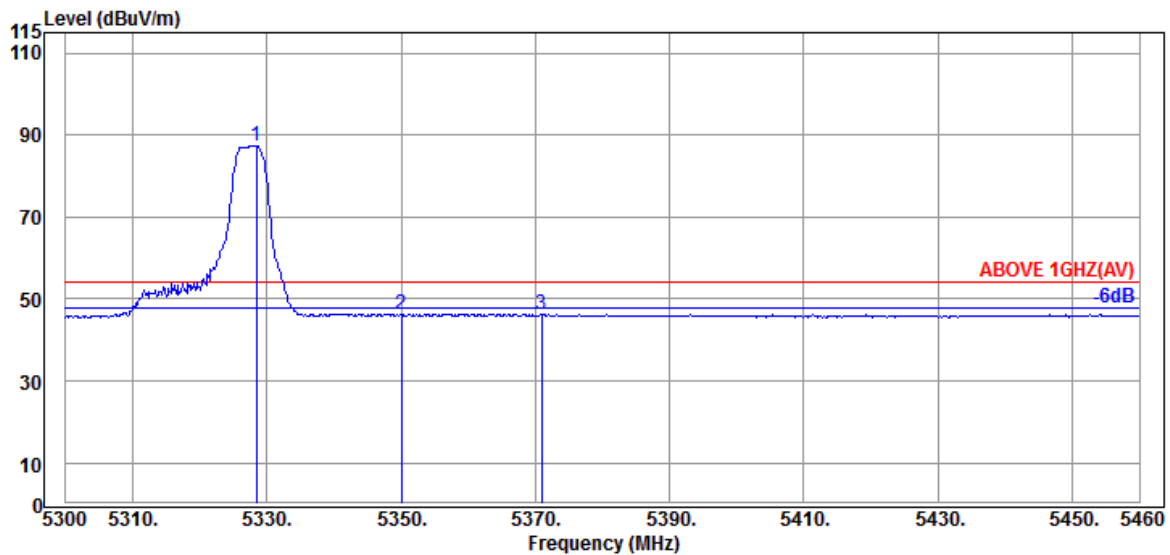


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.97	8.99	39.27	83.75	87.44	---	---	Average
5350.080	33.90	8.99	39.27	42.45	46.07	54.00	7.93	Average
5370.880	34.03	9.01	39.27	42.65	46.42	54.00	7.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

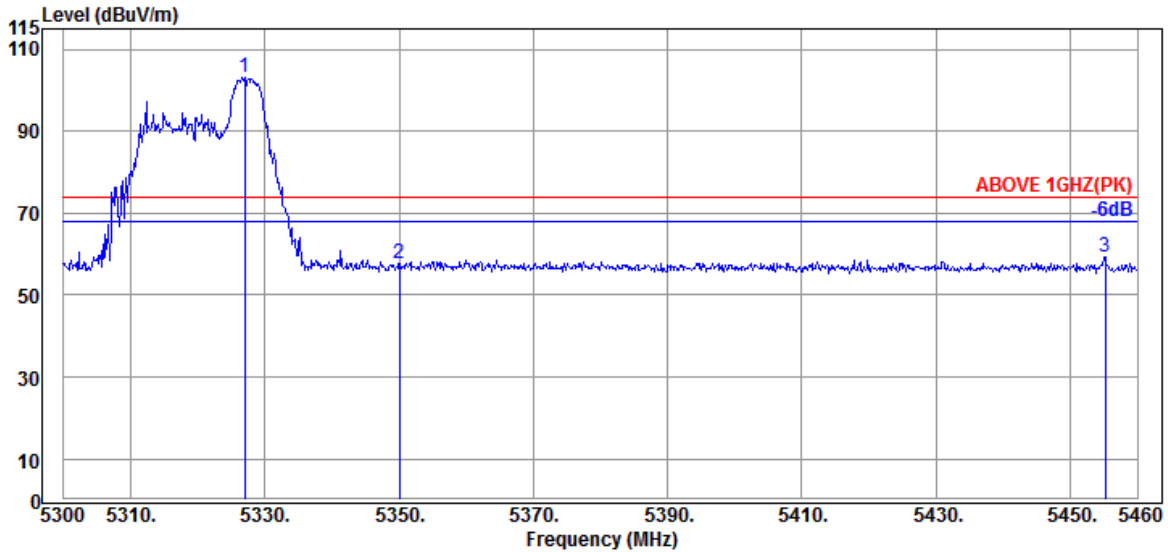

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.040	33.97	8.99	39.27	99.65	103.34	---	---	Peak
5350.080	33.90	8.99	39.27	53.90	57.52	74.00	16.48	Peak
5455.200	34.20	9.05	39.26	55.25	59.24	74.00	14.76	Peak

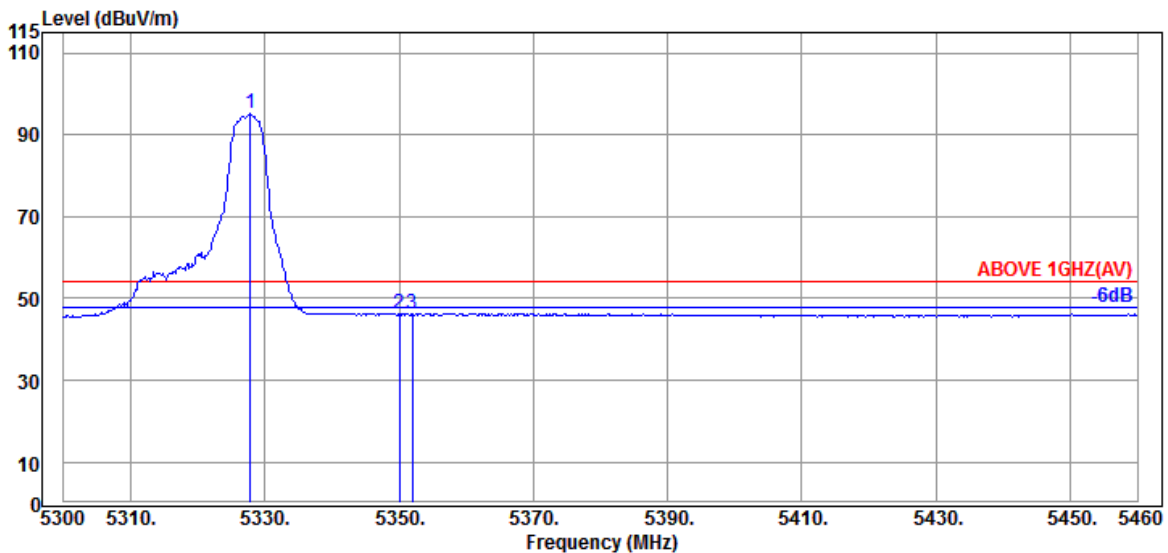


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.840	33.97	8.99	39.27	91.43	95.12	---	---	Average
5350.080	33.90	8.99	39.27	42.47	46.09	54.00	7.91	Average
5352.000	33.90	8.99	39.27	42.63	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

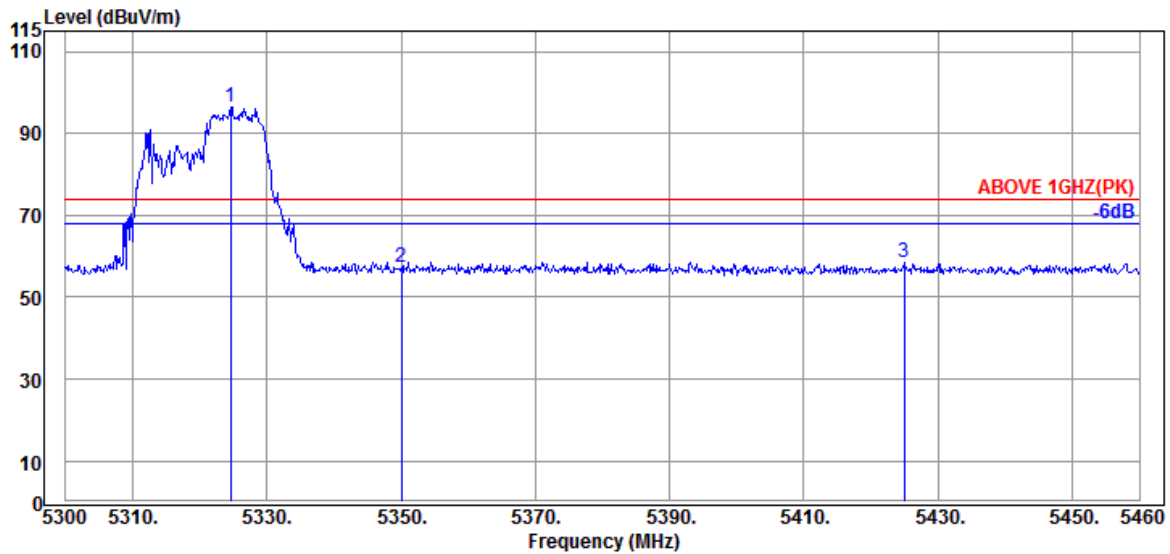

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.640	33.97	8.99	39.27	92.74	96.43	---	---	Peak
5350.080	33.90	8.99	39.27	53.83	57.45	74.00	16.55	Peak
5424.960	34.15	9.04	39.27	54.73	58.65	74.00	15.35	Peak

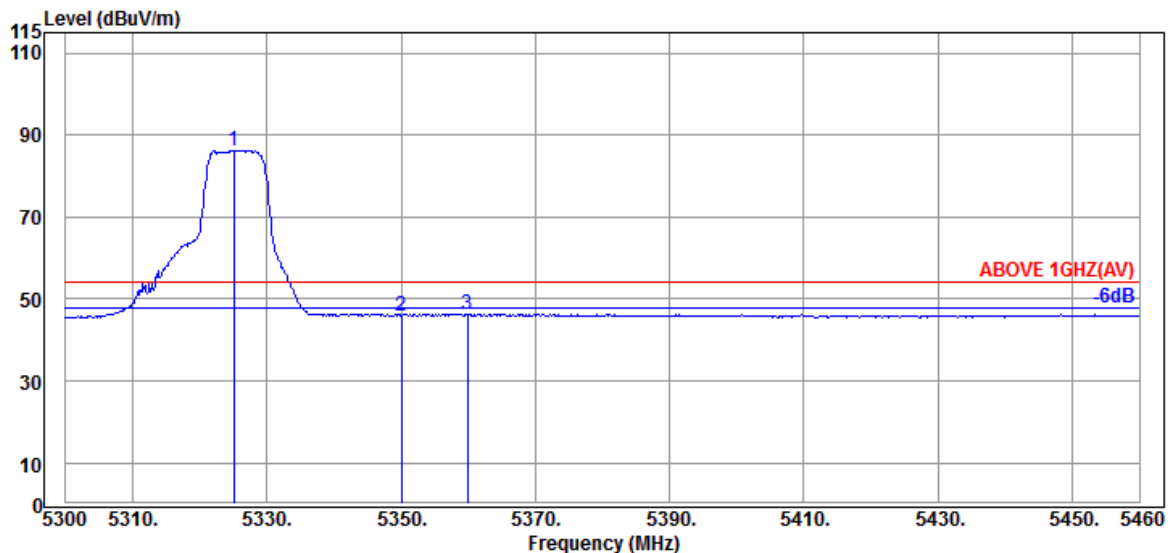


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.120	33.97	8.99	39.27	82.52	86.21	---	---	Average
5350.080	33.90	8.99	39.27	42.39	46.01	54.00	7.99	Average
5359.840	33.97	9.00	39.27	42.61	46.31	54.00	7.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

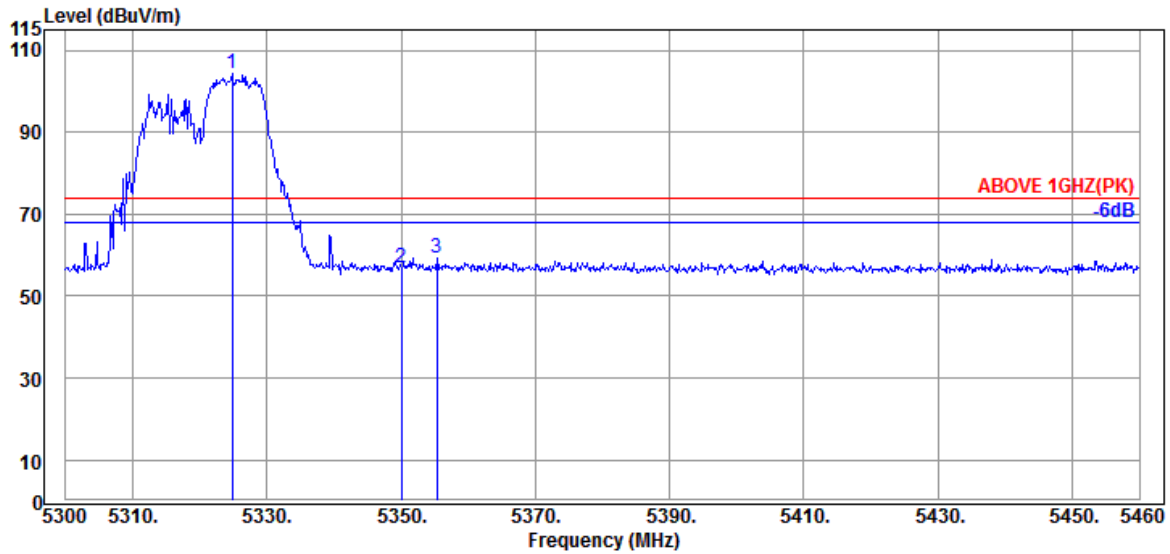

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.800	33.97	8.99	39.27	100.75	104.44	---	---	Peak
5350.080	33.90	8.99	39.27	53.36	56.98	74.00	17.02	Peak
5355.360	33.97	9.00	39.27	55.42	59.12	74.00	14.88	Peak

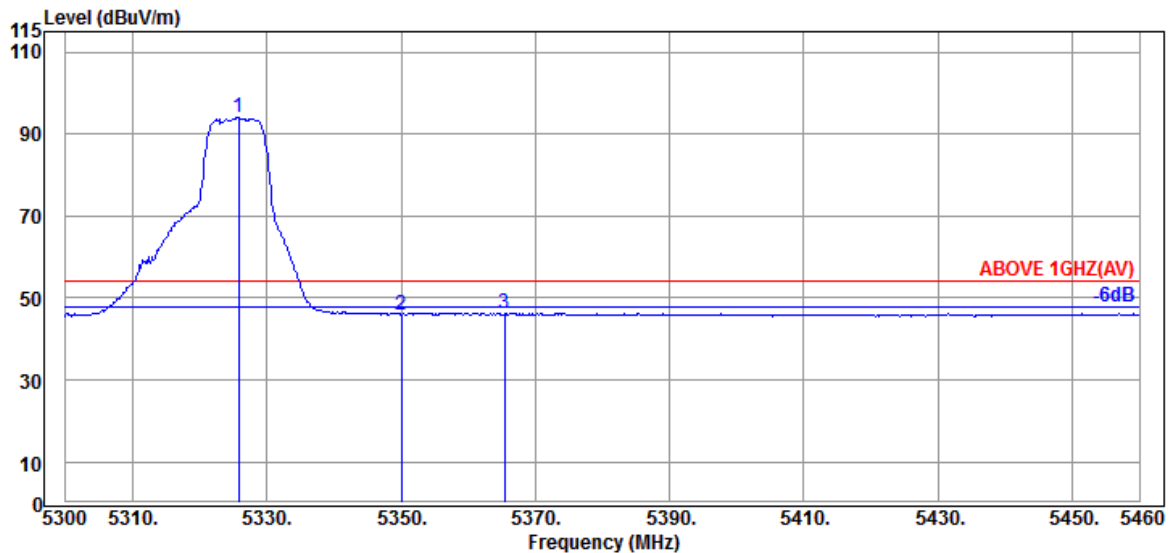


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.760	33.97	8.99	39.27	90.32	94.01	---	---	Average
5350.080	33.90	8.99	39.27	42.39	46.01	54.00	7.99	Average
5365.440	33.97	9.00	39.27	42.57	46.27	54.00	7.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

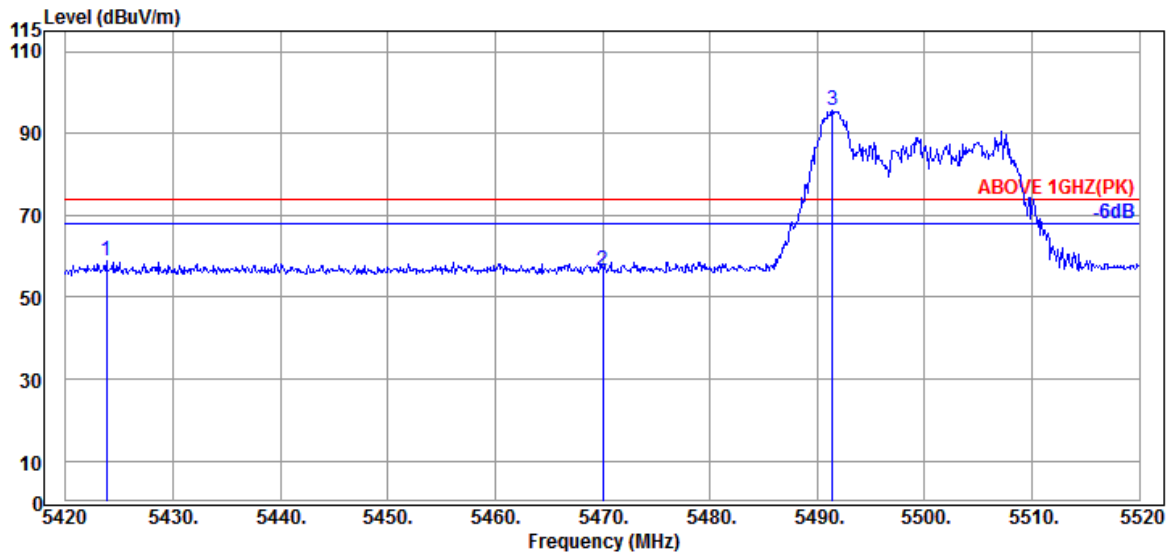

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.800	34.15	9.04	39.27	55.03	58.95	74.00	15.05	Peak
5470.000	34.17	9.06	39.26	52.60	56.57	74.00	17.43	Peak
@ 5491.400	34.13	9.07	39.26	91.74	95.68	---	---	Peak

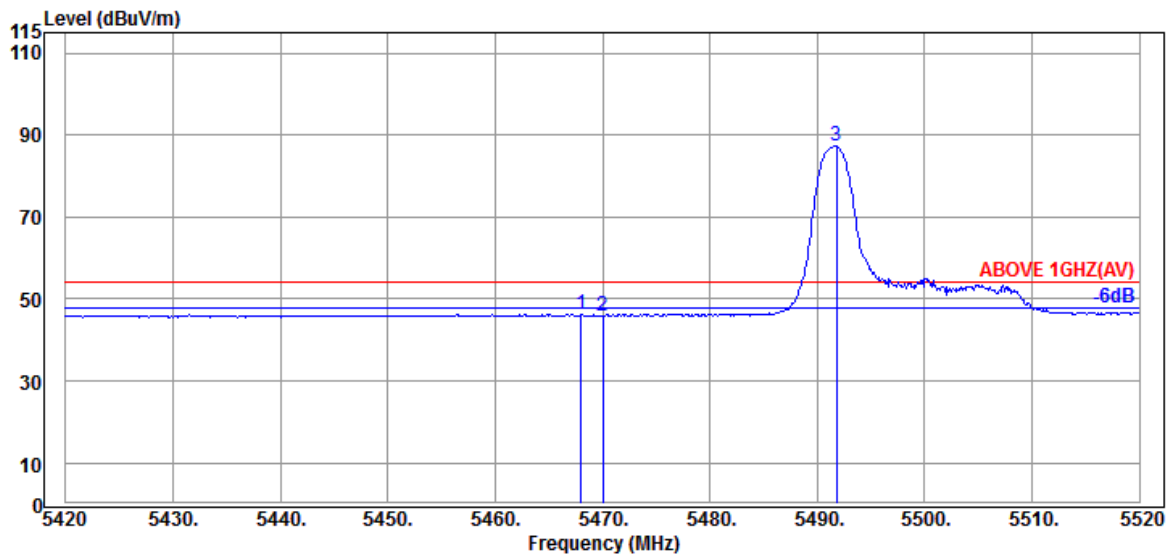


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	42.16	46.13	54.00	7.87	Average
5470.000	34.17	9.06	39.26	41.91	45.88	54.00	8.12	Average
@ 5491.800	34.13	9.07	39.26	83.39	87.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

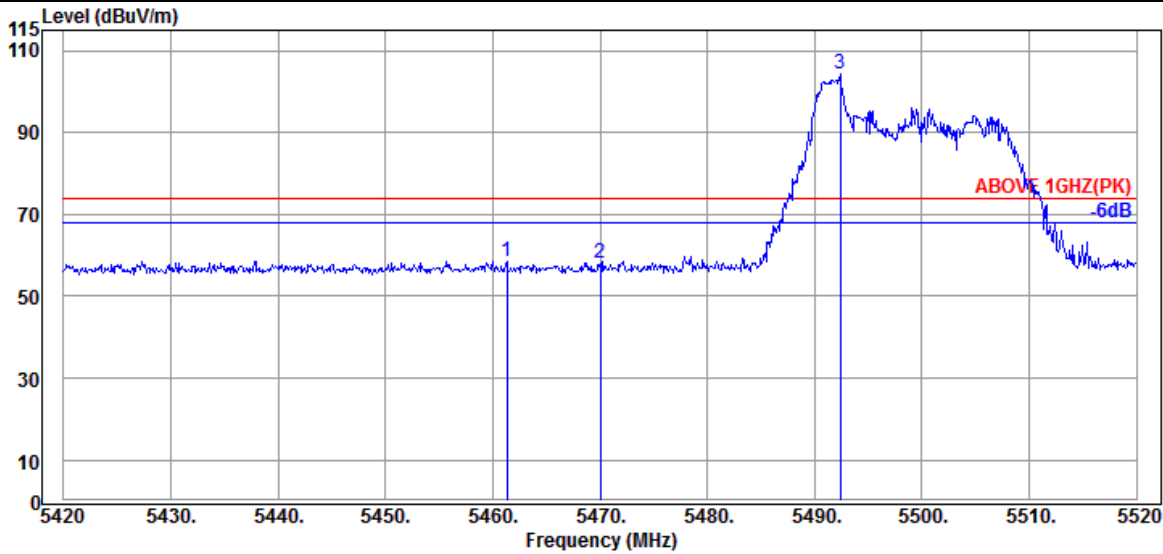

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.20	9.05	39.26	54.65	58.64	74.00	15.36	Peak
5470.000	34.17	9.06	39.26	54.06	58.03	74.00	15.97	Peak
@ 5492.400	34.13	9.07	39.26	100.22	104.16	---	---	Peak

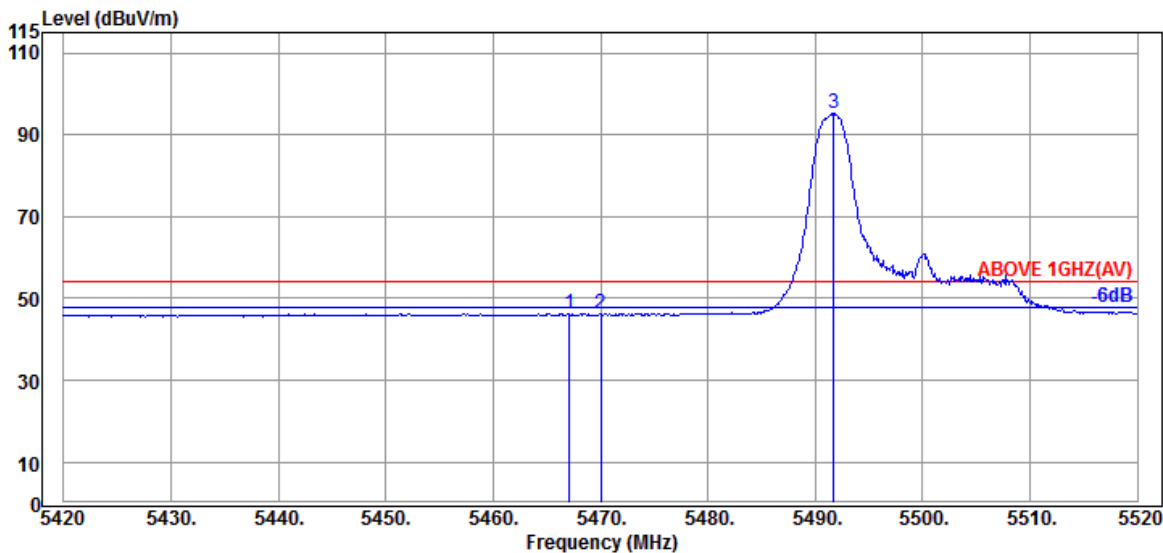


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.17	9.06	39.26	42.23	46.20	54.00	7.80	Average
5470.000	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
@ 5491.700	34.13	9.07	39.26	91.43	95.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

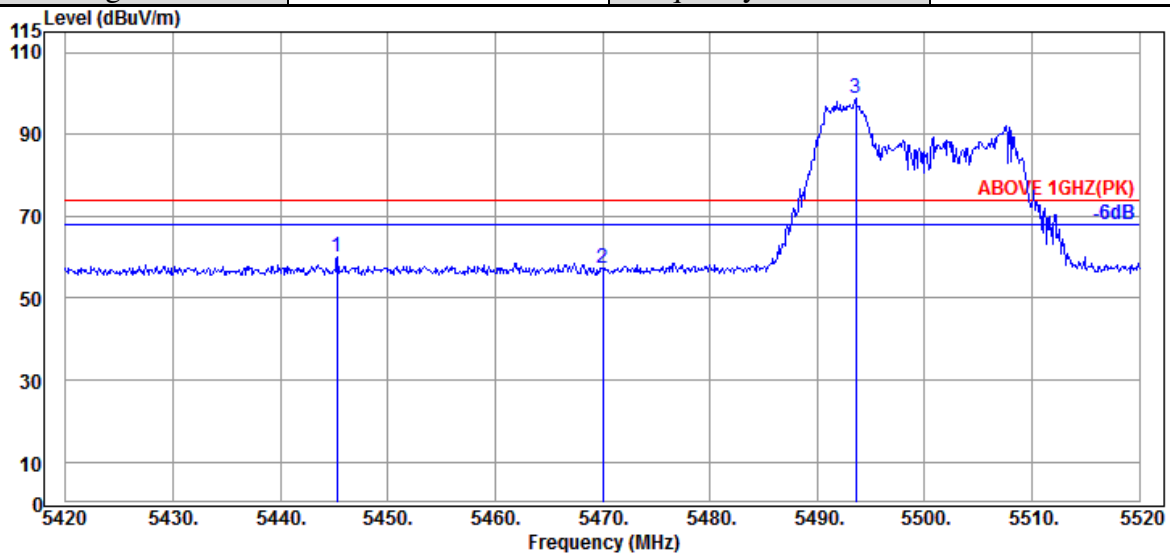

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.17	9.04	39.26	56.08	60.03	74.00	13.97	Peak
5470.000	34.17	9.06	39.26	53.18	57.15	74.00	16.85	Peak
@ 5493.600	34.13	9.07	39.26	94.96	98.90	---	---	Peak

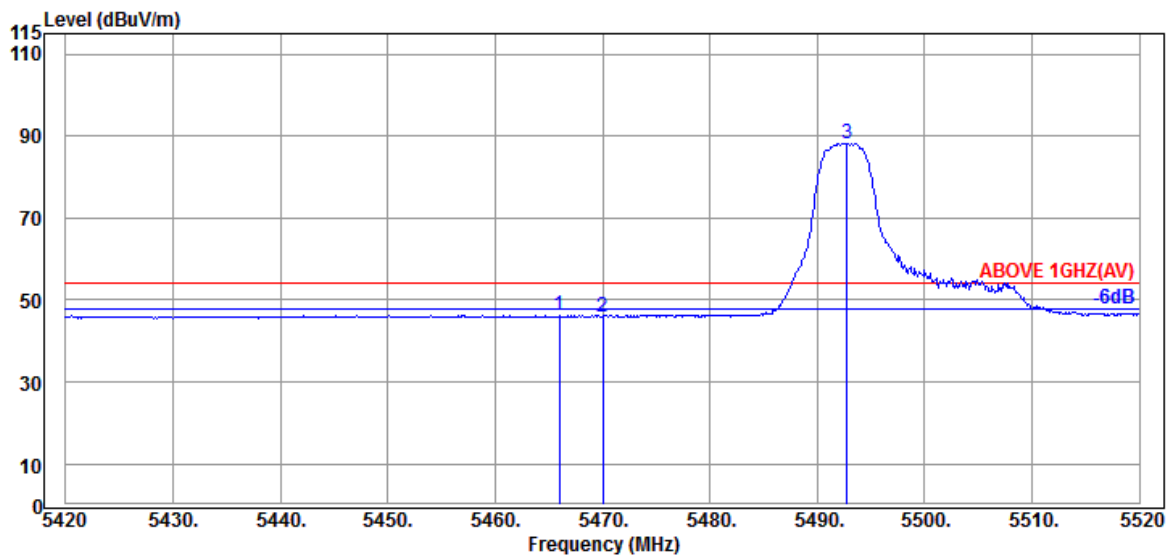


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.17	9.06	39.26	42.24	46.21	54.00	7.79	Average
5470.000	34.17	9.06	39.26	41.98	45.95	54.00	8.05	Average
@ 5492.800	34.13	9.07	39.26	84.24	88.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

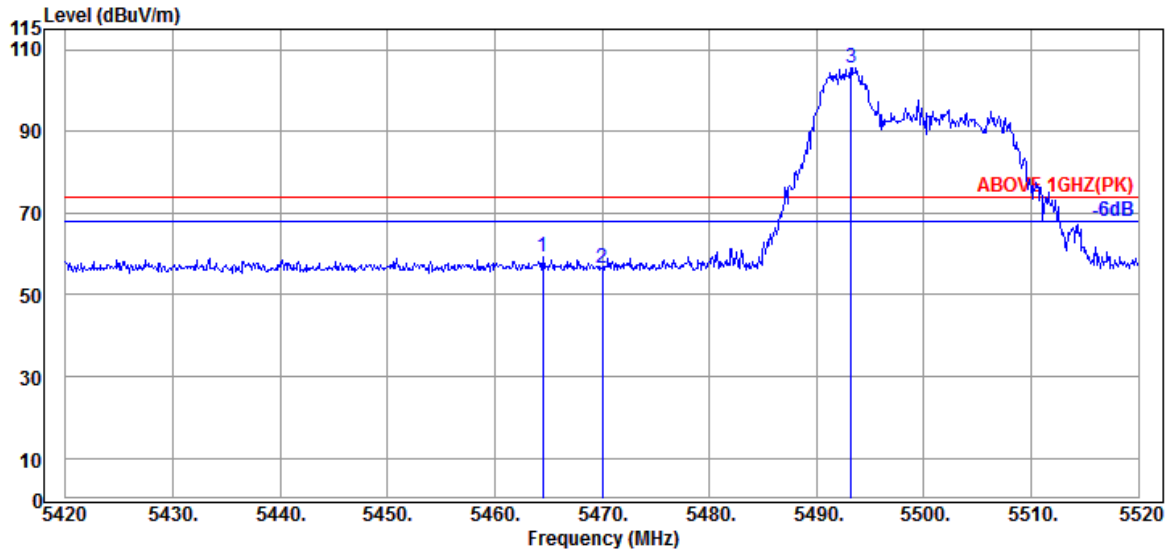

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.17	9.06	39.26	55.13	59.10	74.00	14.90	Peak
5470.000	34.17	9.06	39.26	52.44	56.41	74.00	17.59	Peak
@ 5493.200	34.13	9.07	39.26	101.60	105.54	---	---	Peak

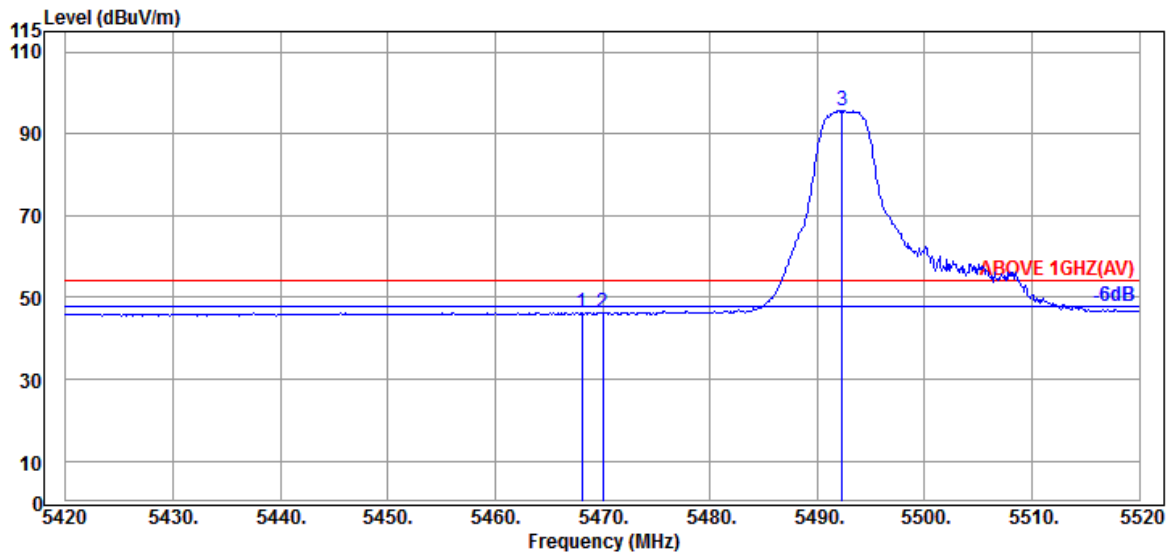


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.17	9.06	39.26	42.24	46.21	54.00	7.79	Average
5470.000	34.17	9.06	39.26	42.20	46.17	54.00	7.83	Average
@ 5492.300	34.13	9.07	39.26	91.59	95.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

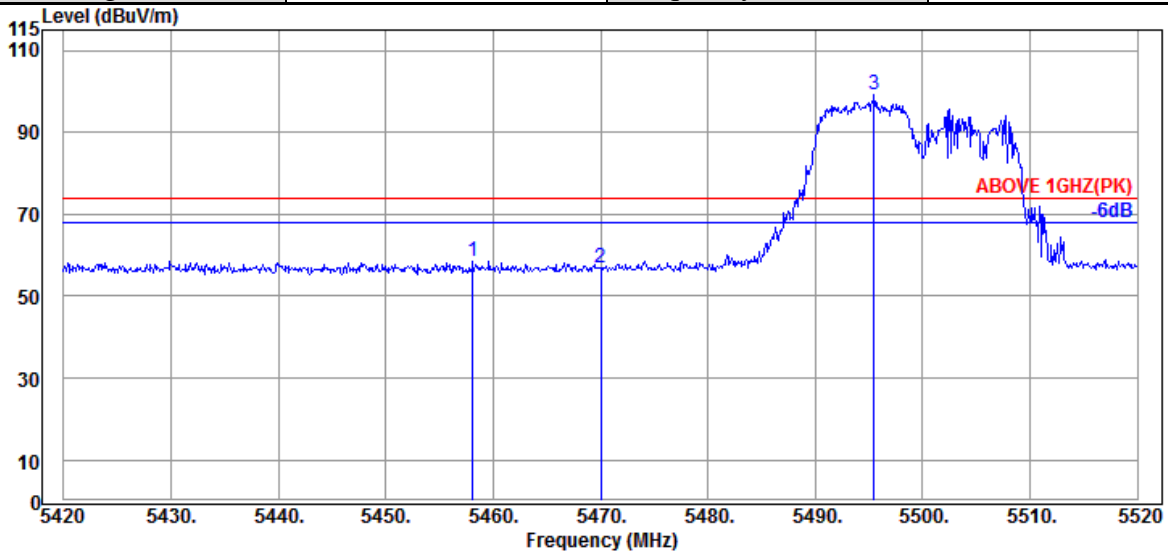

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.100	34.20	9.05	39.26	54.54	58.53	74.00	15.47	Peak
5470.000	34.17	9.06	39.26	52.85	56.82	74.00	17.18	Peak
@ 5495.500	34.10	9.08	39.26	95.37	99.29	---	---	Peak

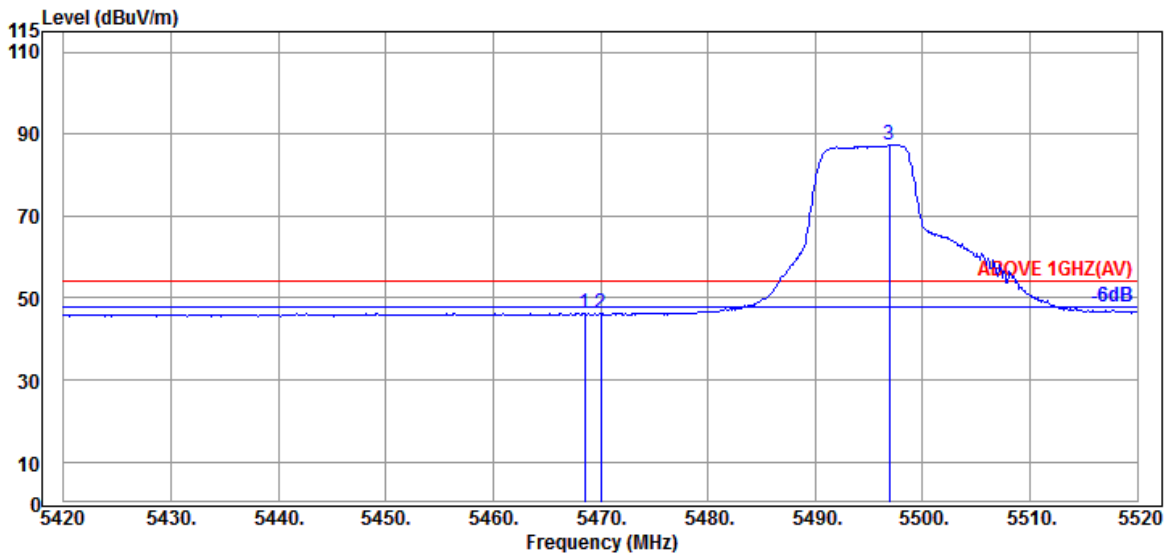


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.17	9.06	39.26	42.22	46.19	54.00	7.81	Average
5470.000	34.17	9.06	39.26	42.15	46.12	54.00	7.88	Average
@ 5496.900	34.10	9.08	39.26	83.58	87.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

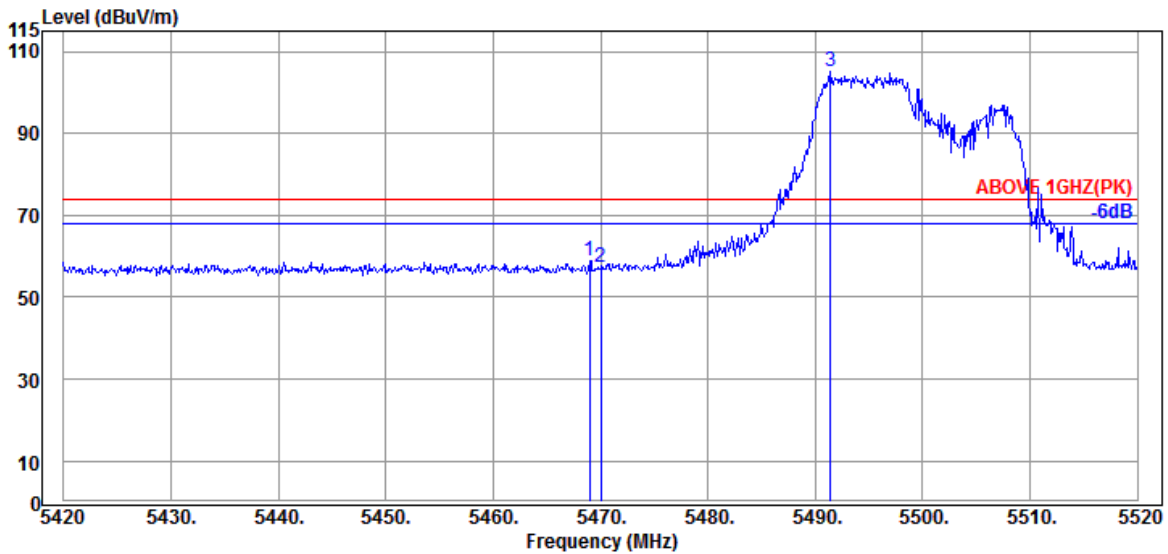

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	54.79	58.76	74.00	15.24	Peak
5470.000	34.17	9.06	39.26	53.38	57.35	74.00	16.65	Peak
@ 5491.400	34.13	9.07	39.26	101.01	104.95	---	---	Peak

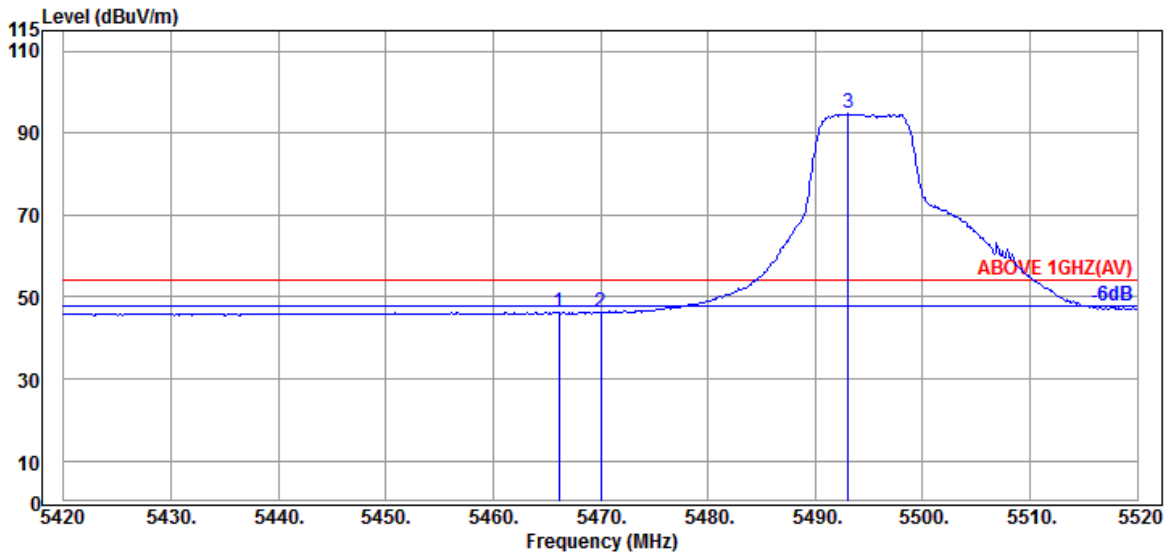


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	9.06	39.26	42.34	46.31	54.00	7.69	Average
5470.000	34.17	9.06	39.26	42.31	46.28	54.00	7.72	Average
@ 5493.100	34.13	9.07	39.26	90.72	94.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

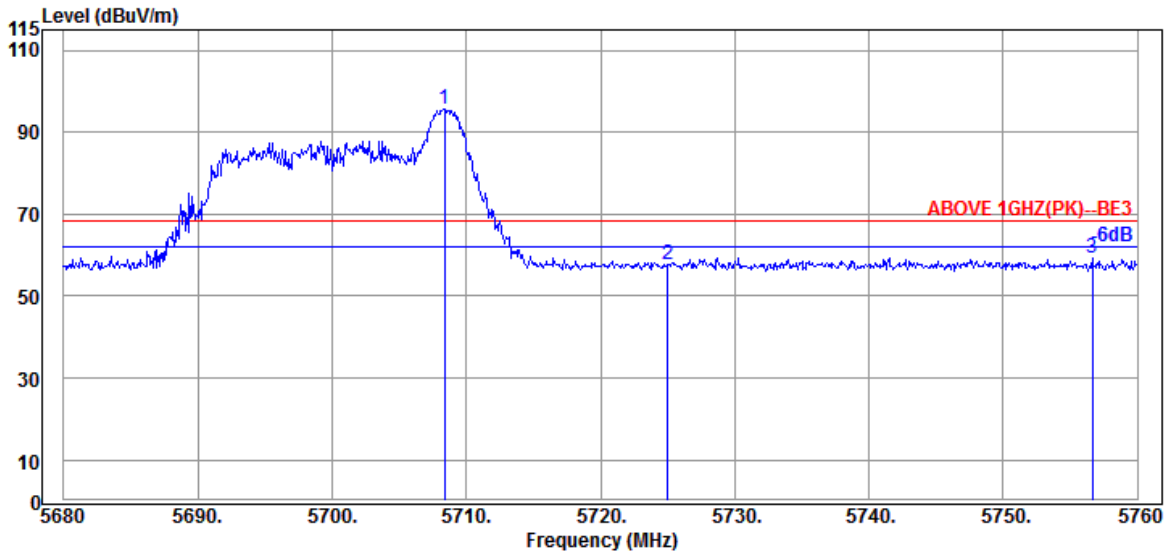

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	33.80	9.19	39.30	92.13	95.82	---	---	Peak
5725.040	33.80	9.20	39.30	54.02	57.72	68.20	10.48	Peak
5756.640	33.87	9.21	39.31	55.46	59.23	68.20	8.97	Peak

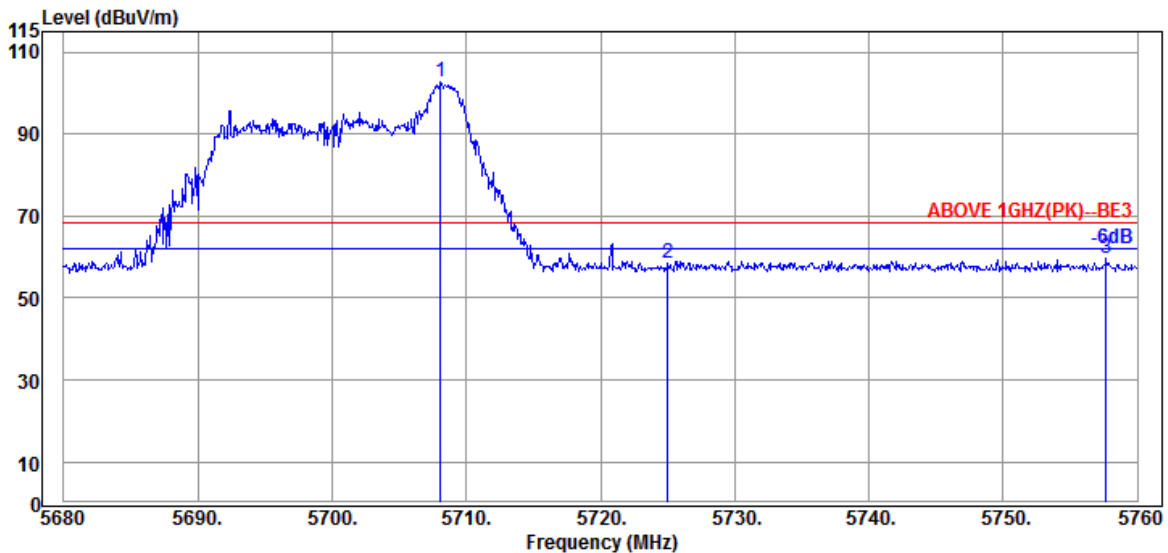


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.080	33.80	9.19	39.30	99.18	102.87	---	---	Peak
5725.040	33.80	9.20	39.30	54.76	58.46	68.20	9.74	Peak
5757.680	33.87	9.21	39.31	56.06	59.83	68.20	8.37	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

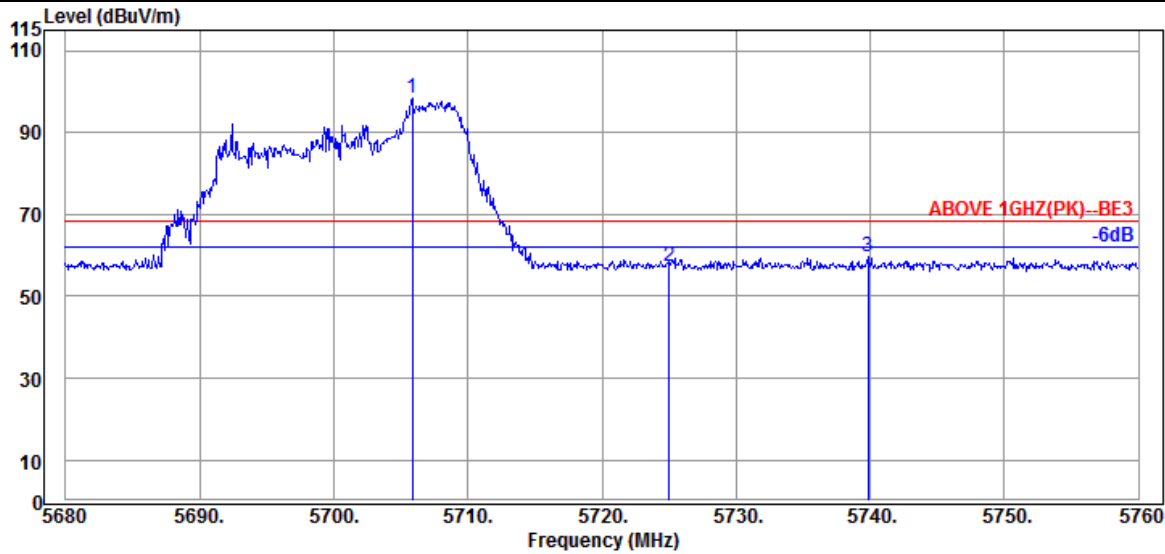

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5705.840	33.80	9.19	39.30	94.70	98.39	---	---	Peak
5725.040	33.80	9.20	39.30	53.41	57.11	68.20	11.09	Peak
5739.840	33.80	9.20	39.31	55.90	59.59	68.20	8.61	Peak

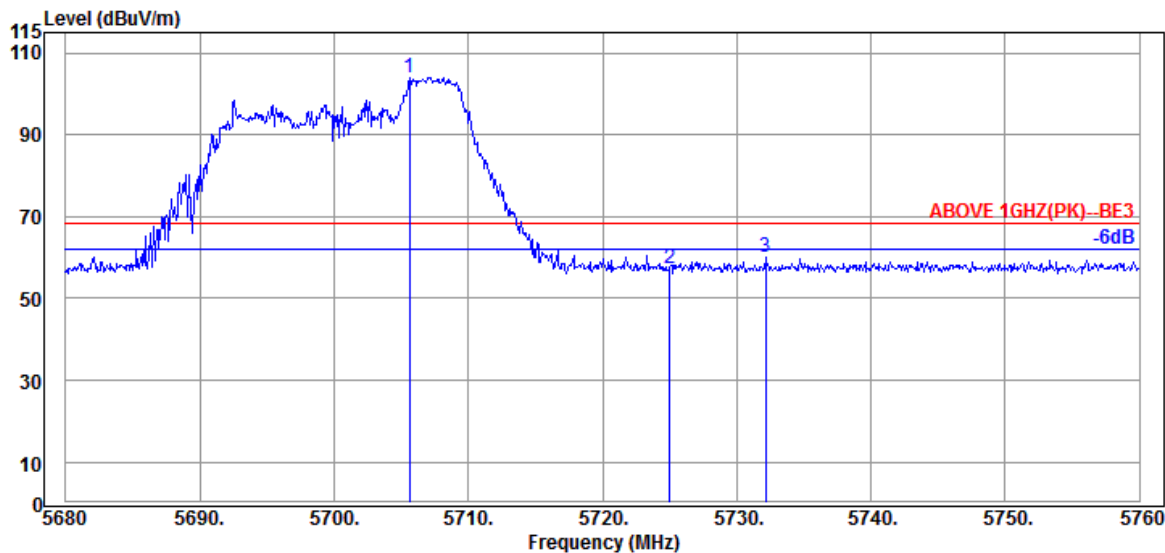


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5705.600	33.80	9.18	39.30	100.44	104.12	---	---	Peak
5725.040	33.80	9.20	39.30	53.73	57.43	68.20	10.77	Peak
5732.160	33.80	9.20	39.31	56.49	60.18	68.20	8.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

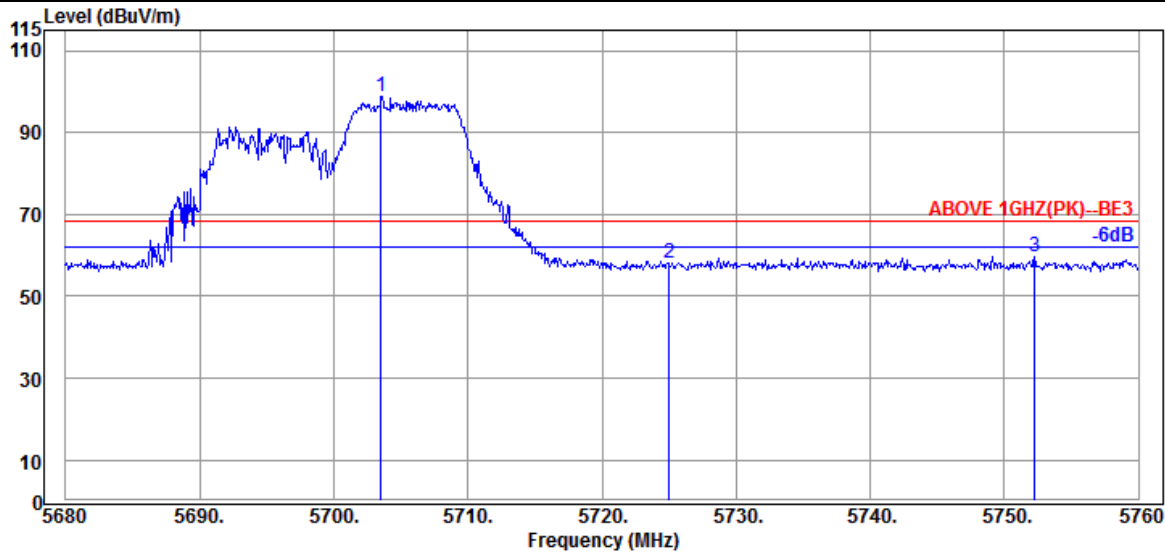

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.520	33.80	9.18	39.30	95.04	98.72	---	---	Peak
5725.040	33.80	9.20	39.30	54.49	58.19	68.20	10.01	Peak
5752.240	33.80	9.20	39.31	56.01	59.70	68.20	8.50	Peak

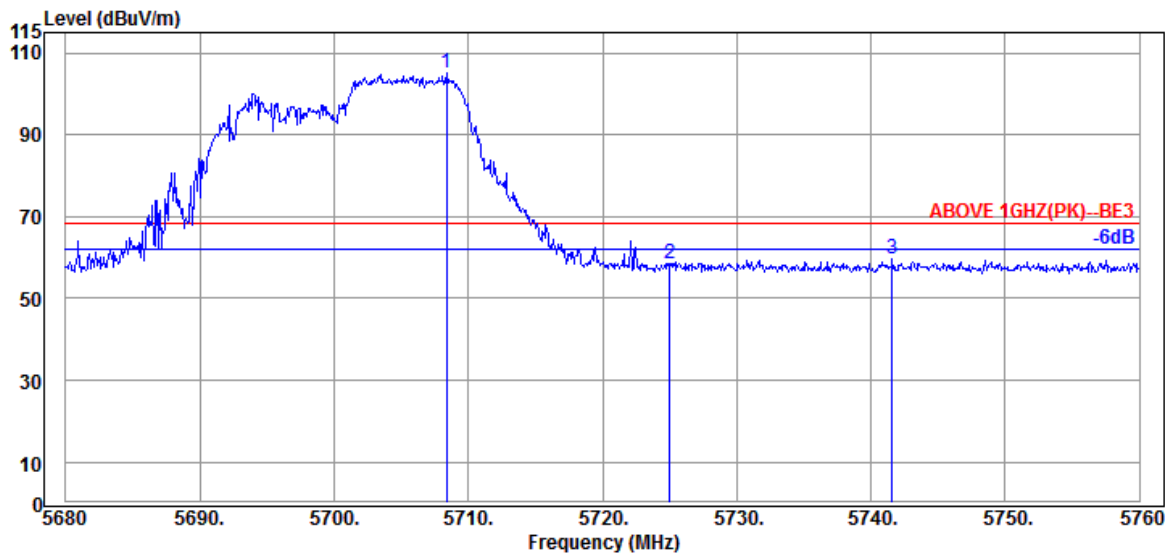


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	33.80	9.19	39.30	101.28	104.97	---	---	Peak
5725.040	33.80	9.20	39.30	54.63	58.33	68.20	9.87	Peak
5741.600	33.80	9.20	39.31	55.89	59.58	68.20	8.62	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

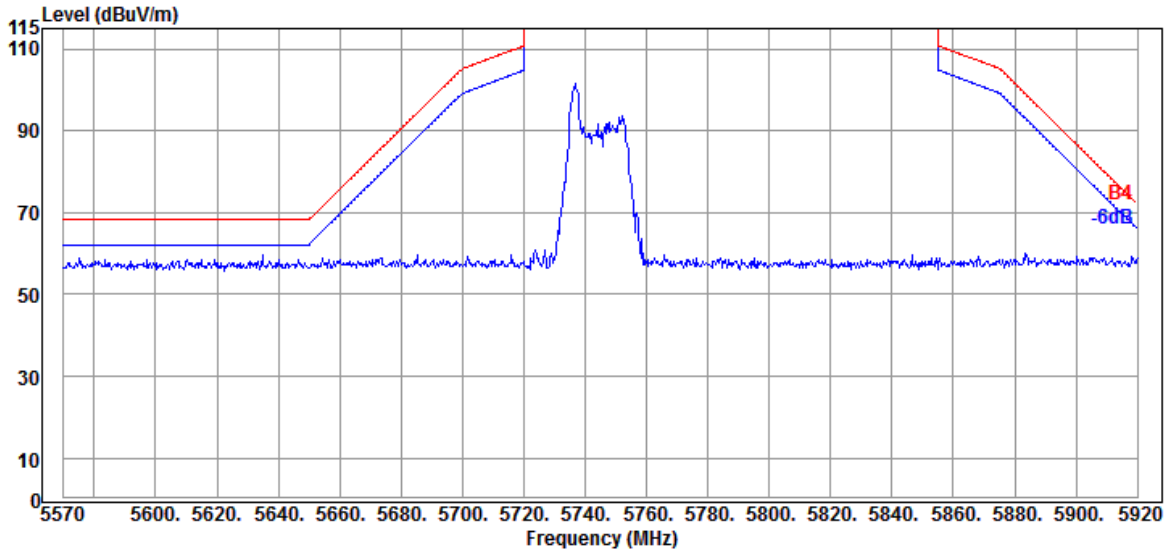


Antenna at Vertical Polarization

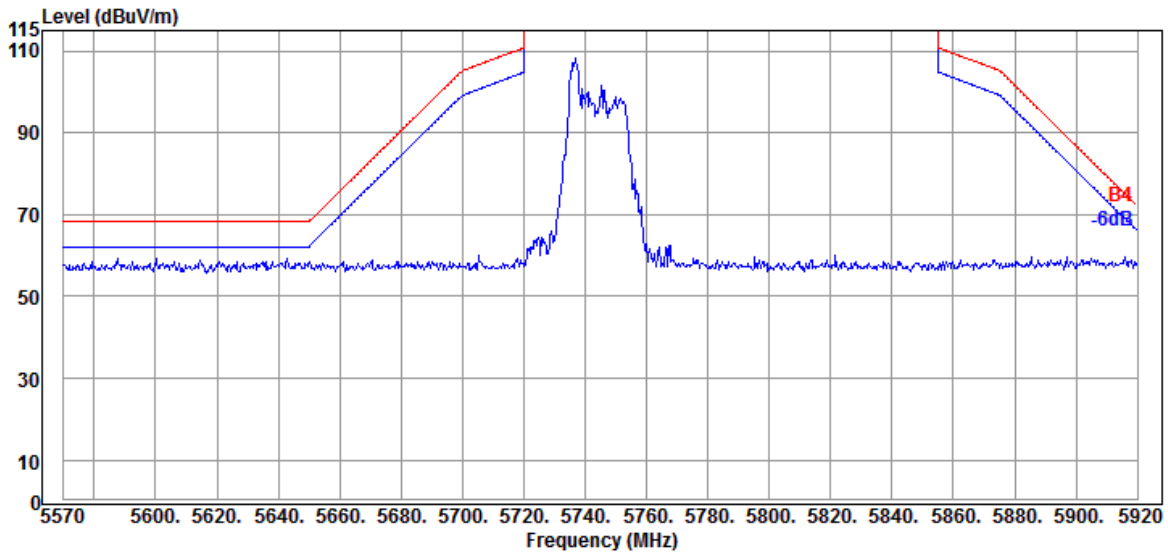


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

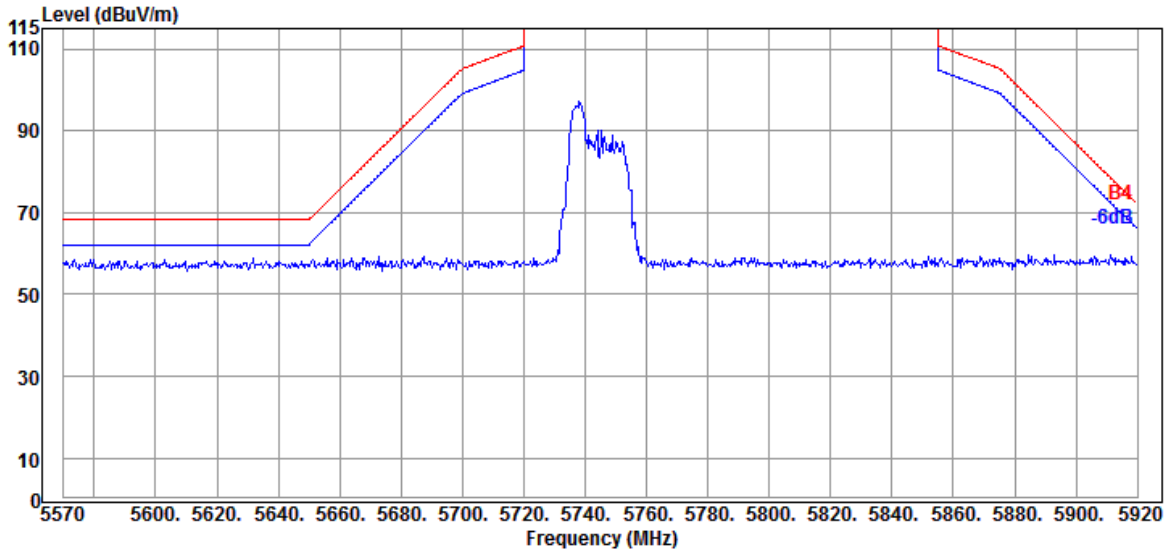


Antenna at Vertical Polarization

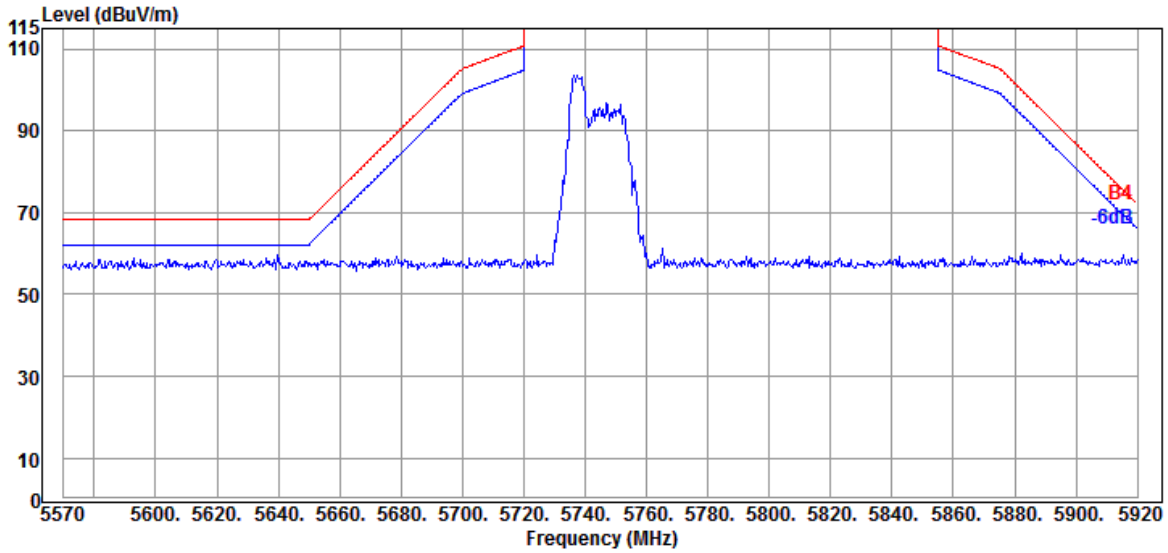


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

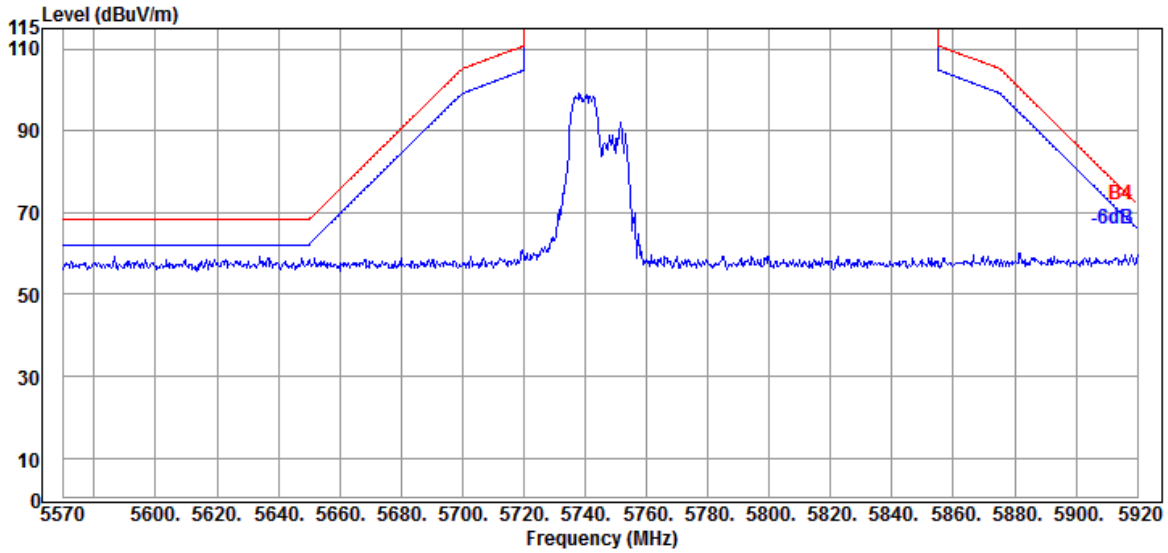


Antenna at Vertical Polarization

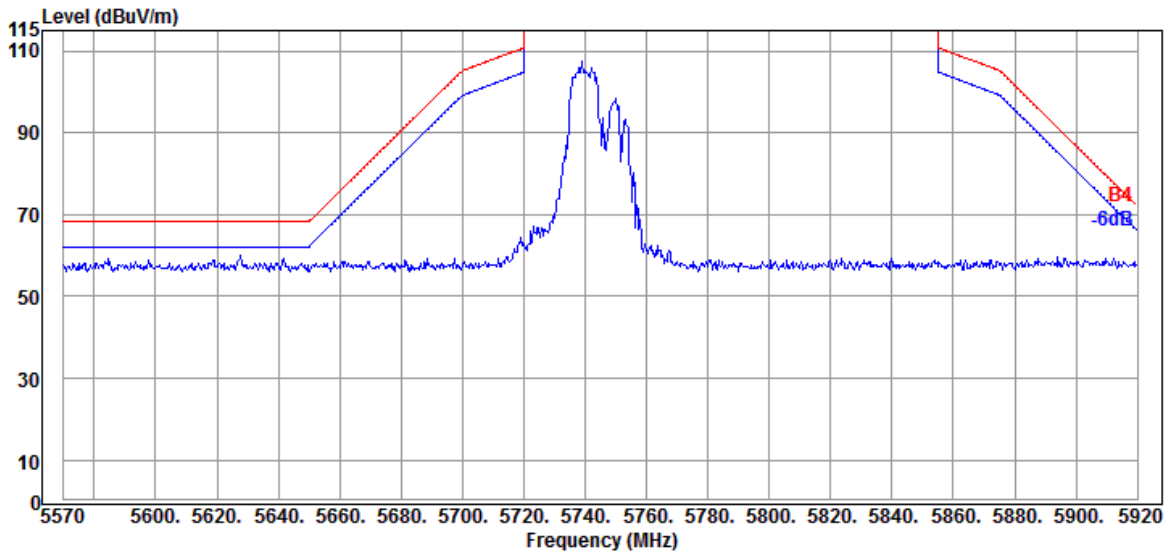


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

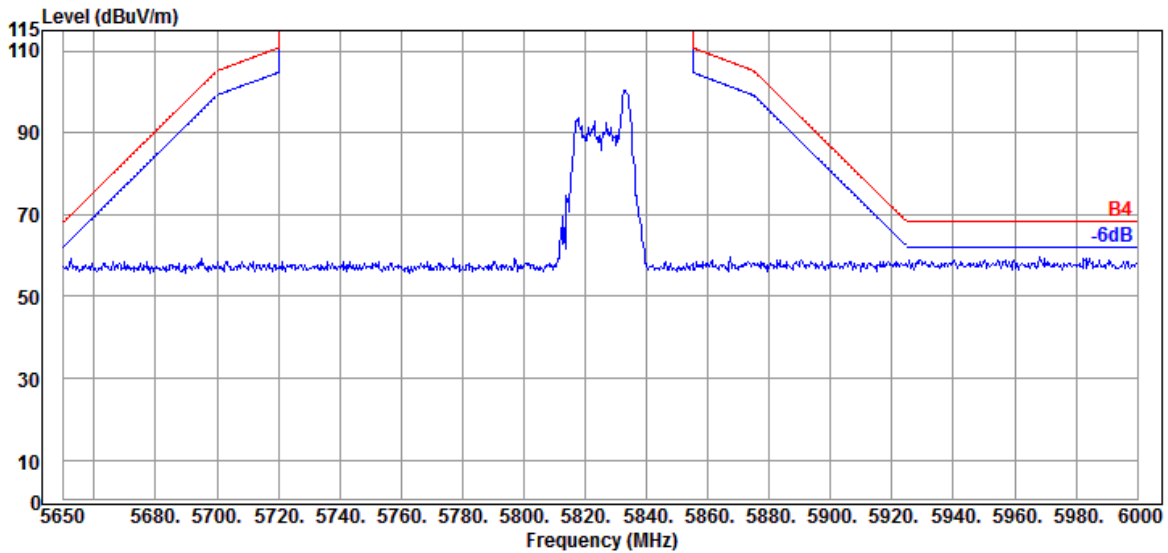


Antenna at Vertical Polarization

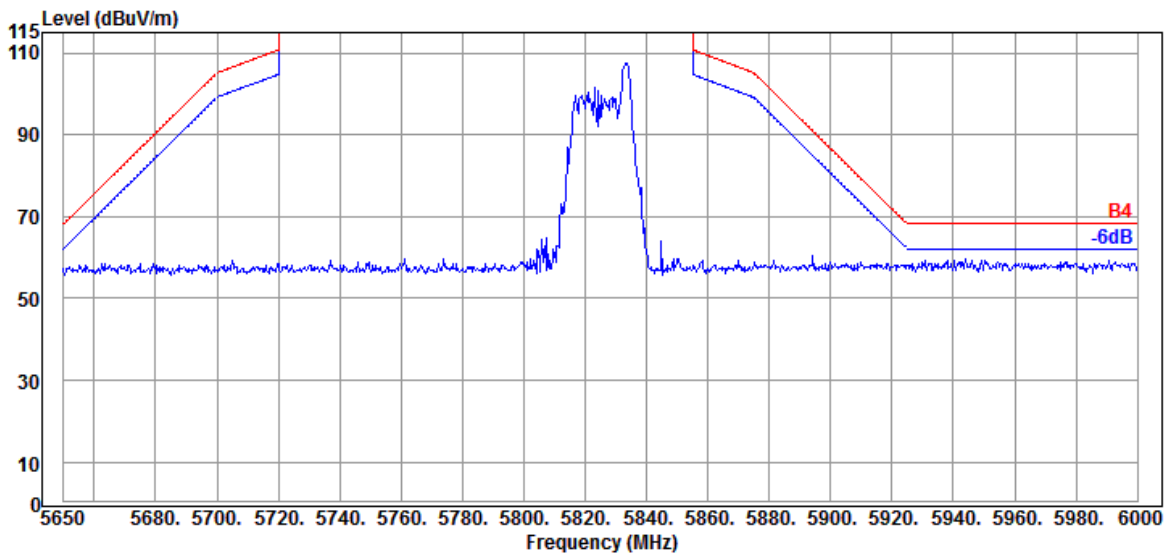


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

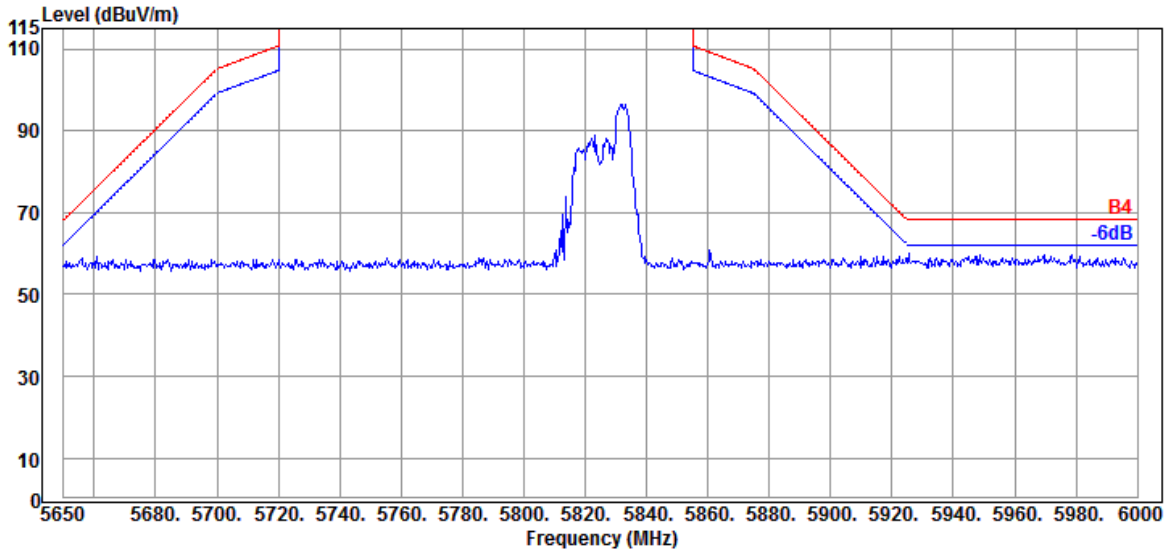


Antenna at Vertical Polarization

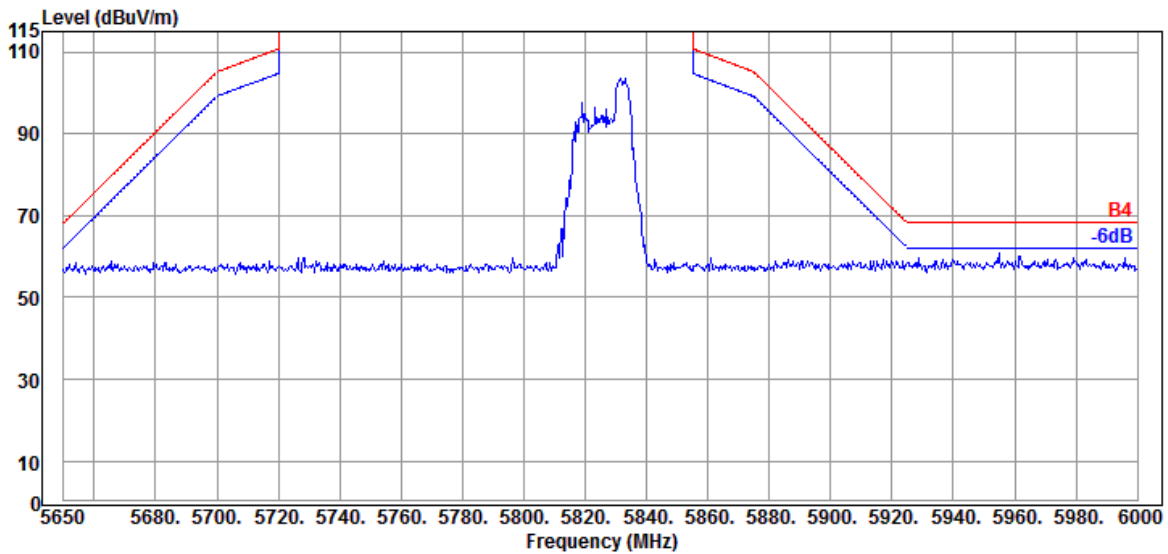


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

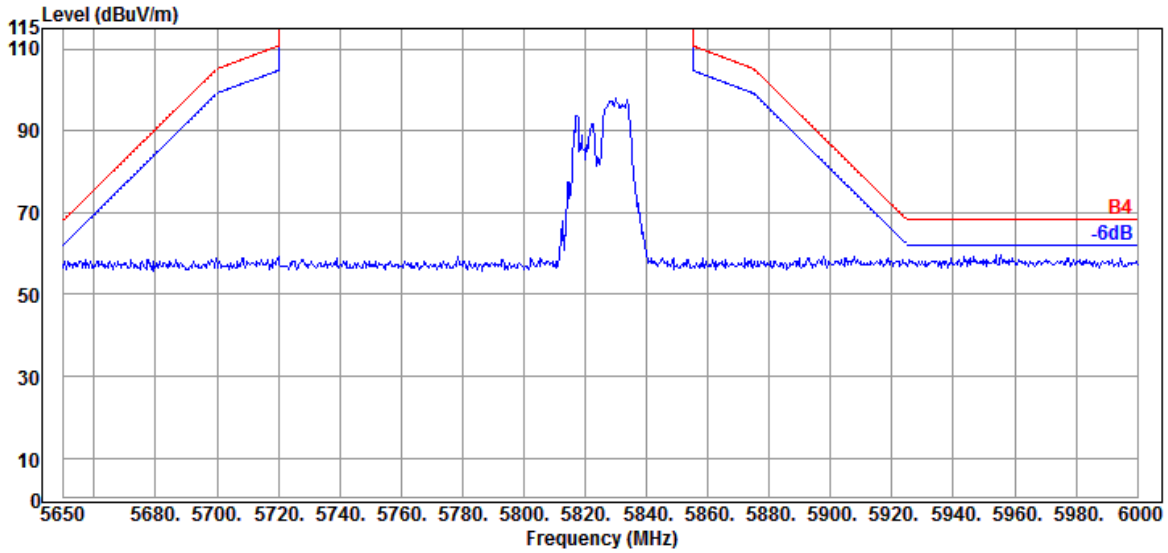

Antenna at Vertical Polarization

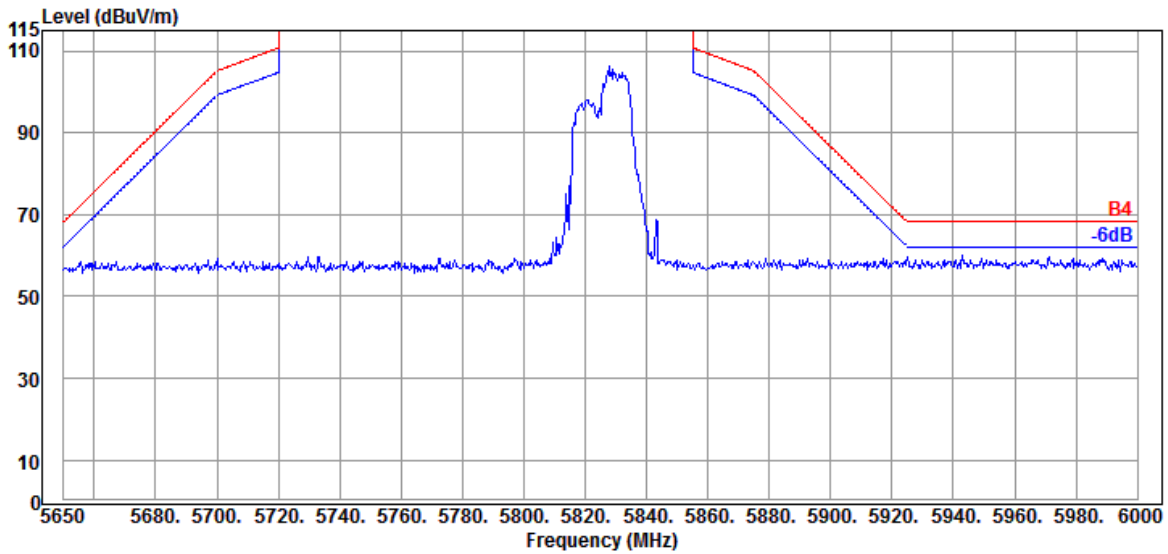


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

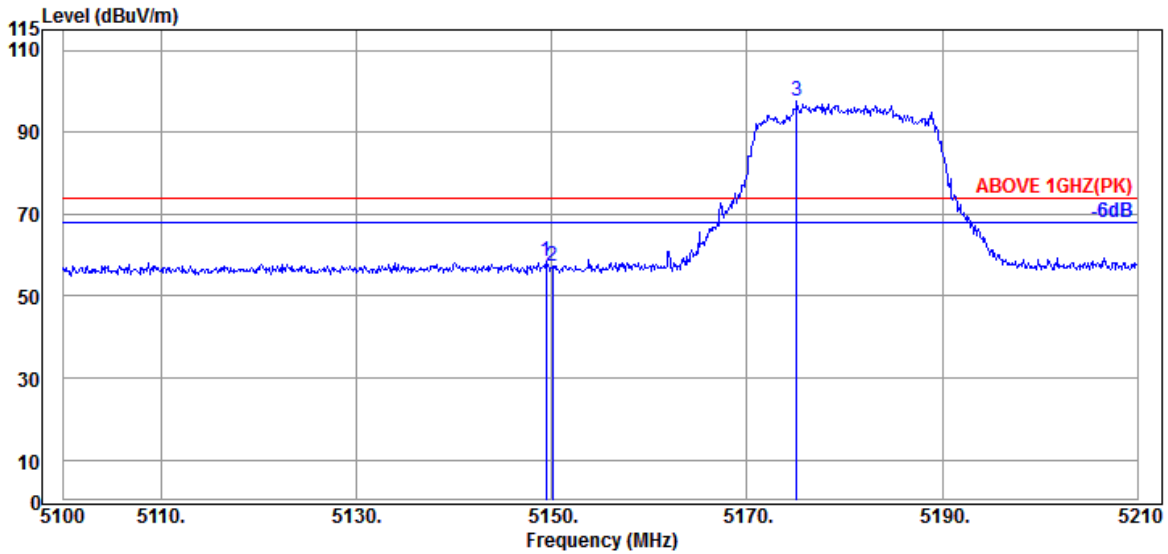

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.70	8.88	39.29	55.26	58.55	74.00	15.45	Peak
5150.050	33.70	8.88	39.29	53.92	57.21	74.00	16.79	Peak
@ 5175.130	33.70	8.90	39.28	94.11	97.43	---	---	Peak

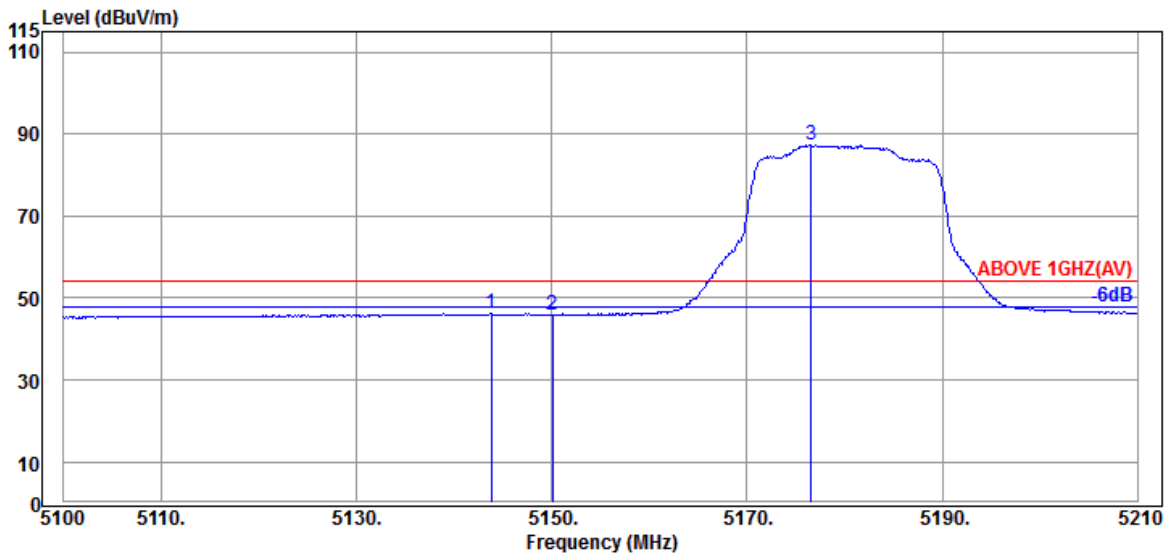


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.780	33.70	8.88	39.29	42.85	46.14	54.00	7.86	Average
5150.050	33.70	8.88	39.29	42.67	45.96	54.00	8.04	Average
@ 5176.560	33.70	8.90	39.28	83.93	87.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

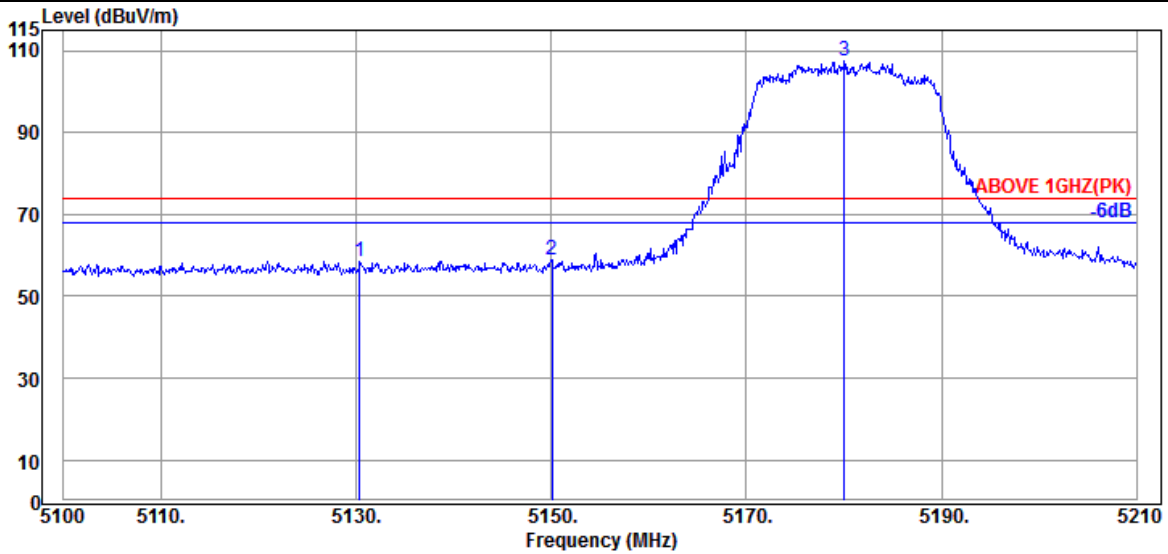

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.360	33.70	8.88	39.29	55.26	58.55	74.00	15.45	Peak
5150.050	33.70	8.88	39.29	55.43	58.72	74.00	15.28	Peak
@ 5180.080	33.70	8.90	39.28	103.99	107.31	---	---	Peak

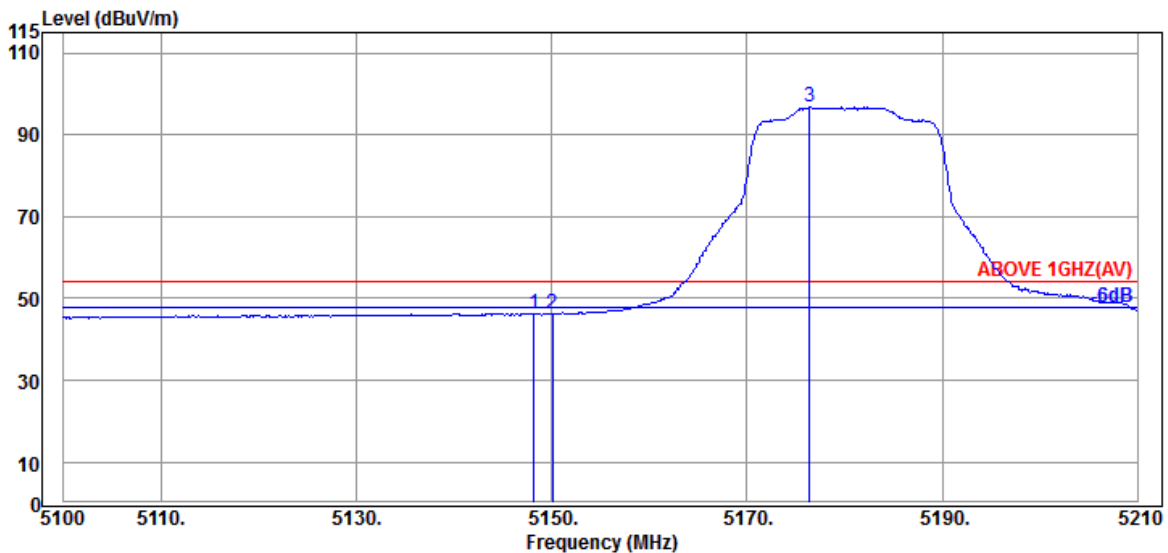


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.180	33.70	8.88	39.29	43.11	46.40	54.00	7.60	Average
5150.050	33.70	8.88	39.29	42.99	46.28	54.00	7.72	Average
@ 5176.450	33.70	8.90	39.28	93.49	96.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

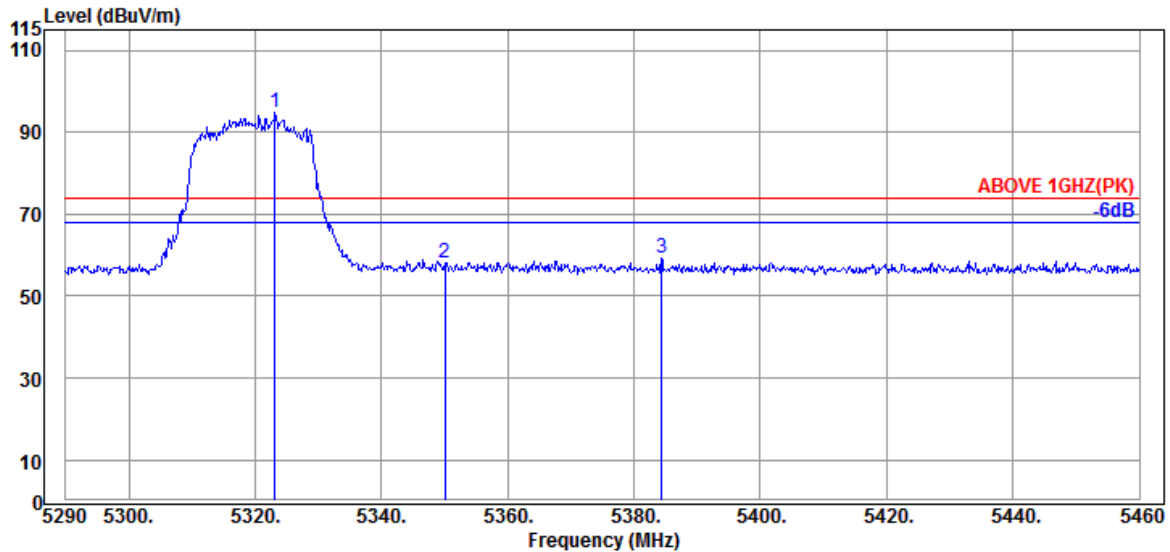

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.150	34.03	8.98	39.27	91.13	94.87	---	---	Peak
5350.010	33.90	8.99	39.27	54.46	58.08	74.00	15.92	Peak
5384.350	34.03	9.01	39.27	55.53	59.30	74.00	14.70	Peak

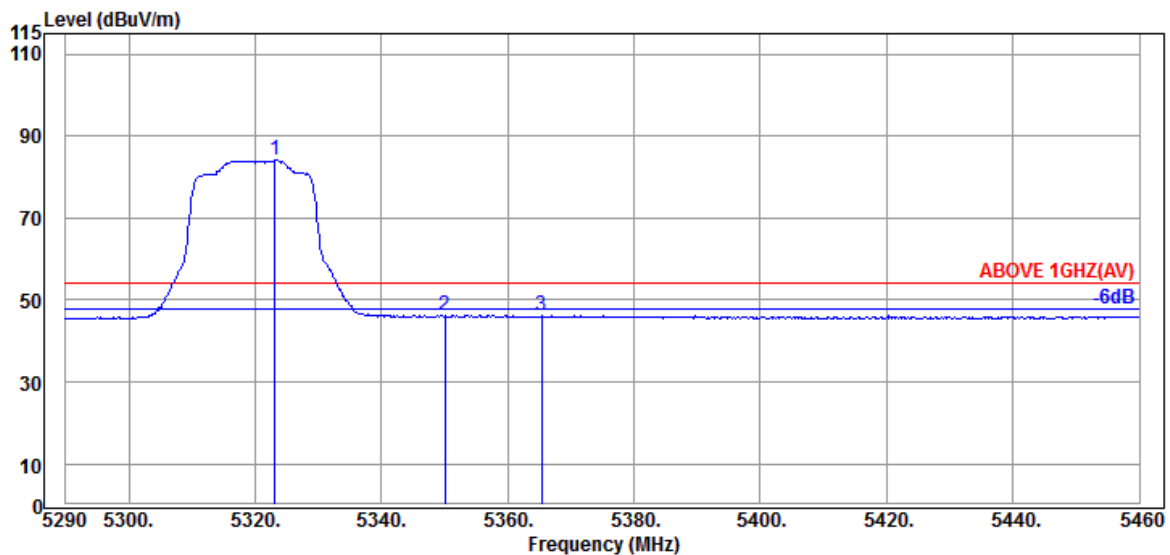


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.150	34.03	8.98	39.27	80.50	84.24	---	---	Average
5350.010	33.90	8.99	39.27	42.55	46.17	54.00	7.83	Average
5365.310	33.97	9.00	39.27	42.50	46.20	54.00	7.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

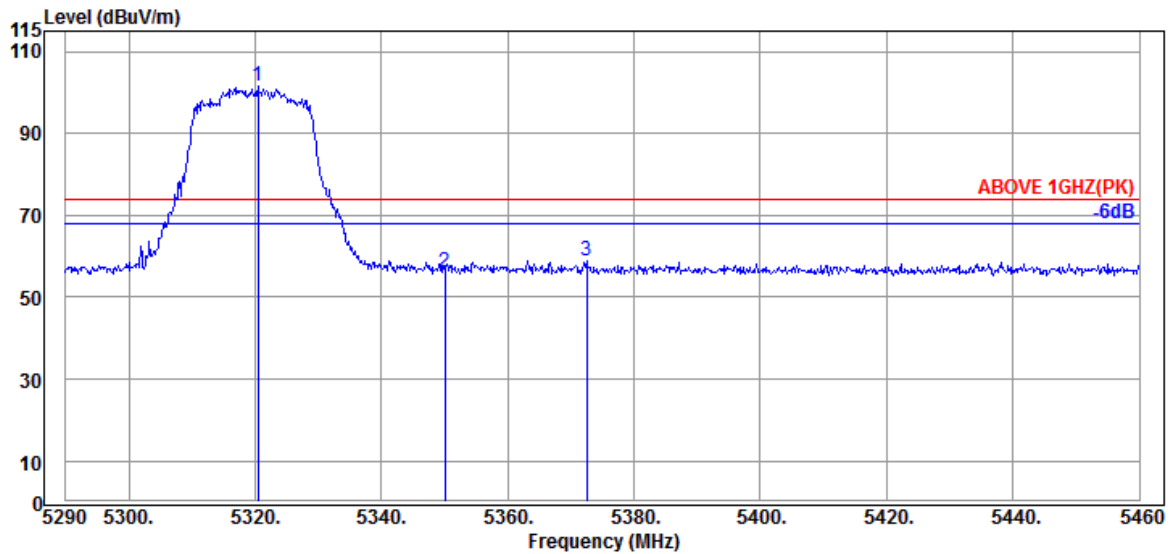

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.430	34.03	8.98	39.27	97.85	101.59	---	---	Peak
5350.010	33.90	8.99	39.27	52.58	56.20	74.00	17.80	Peak
5372.450	34.03	9.01	39.27	55.30	59.07	74.00	14.93	Peak

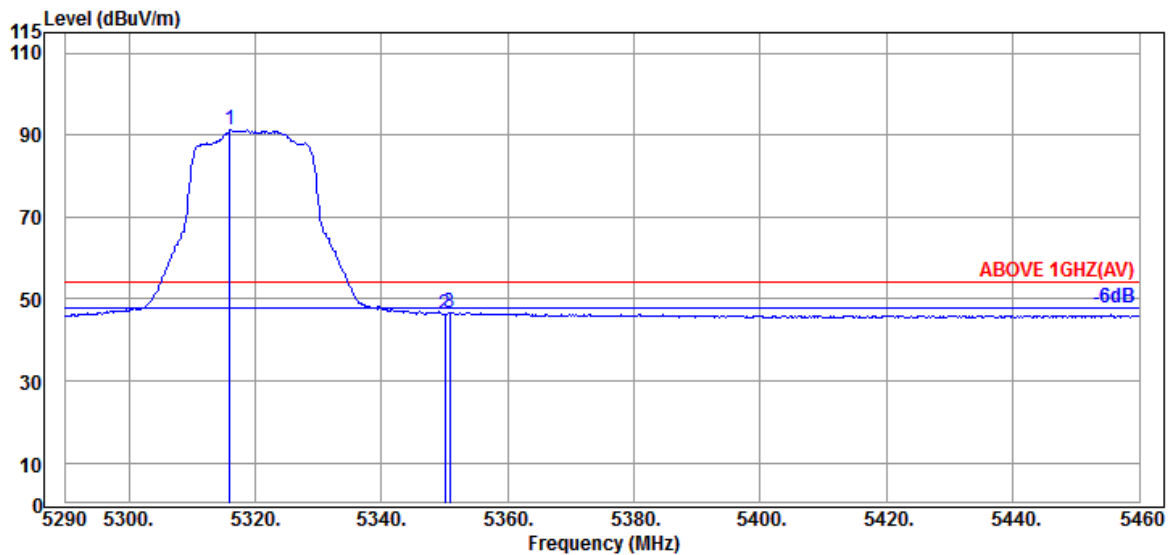


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.010	34.03	8.98	39.27	87.48	91.22	---	---	Average
5350.010	33.90	8.99	39.27	42.79	46.41	54.00	7.59	Average
5350.860	33.90	8.99	39.27	43.17	46.79	54.00	7.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

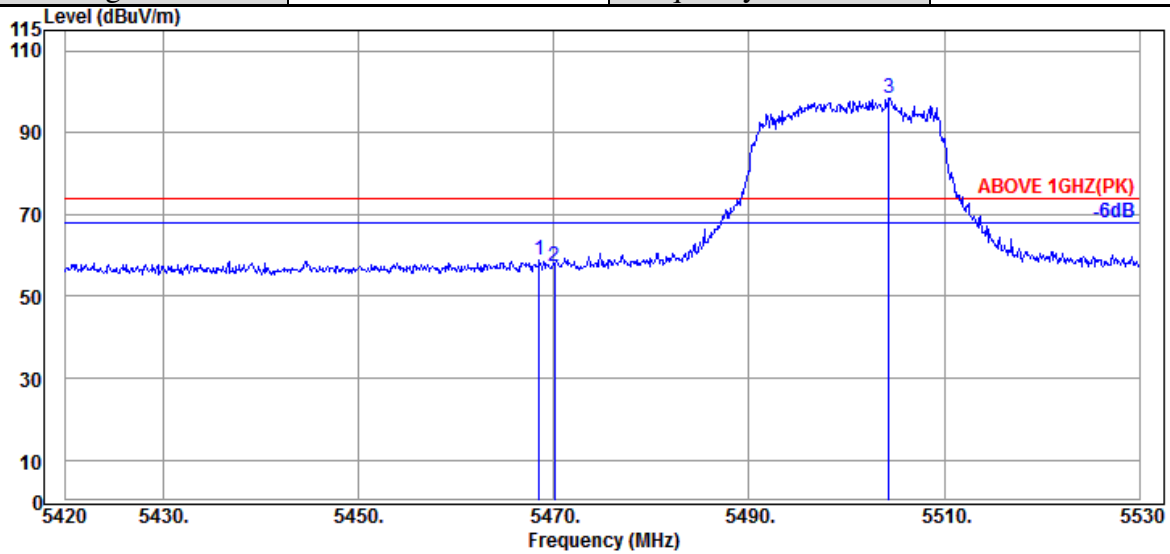

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.510	34.17	9.06	39.26	54.76	58.73	74.00	15.27	Peak
5470.050	34.17	9.06	39.26	53.49	57.46	74.00	16.54	Peak
@ 5504.370	34.10	9.08	39.26	94.47	98.39	---	---	Peak

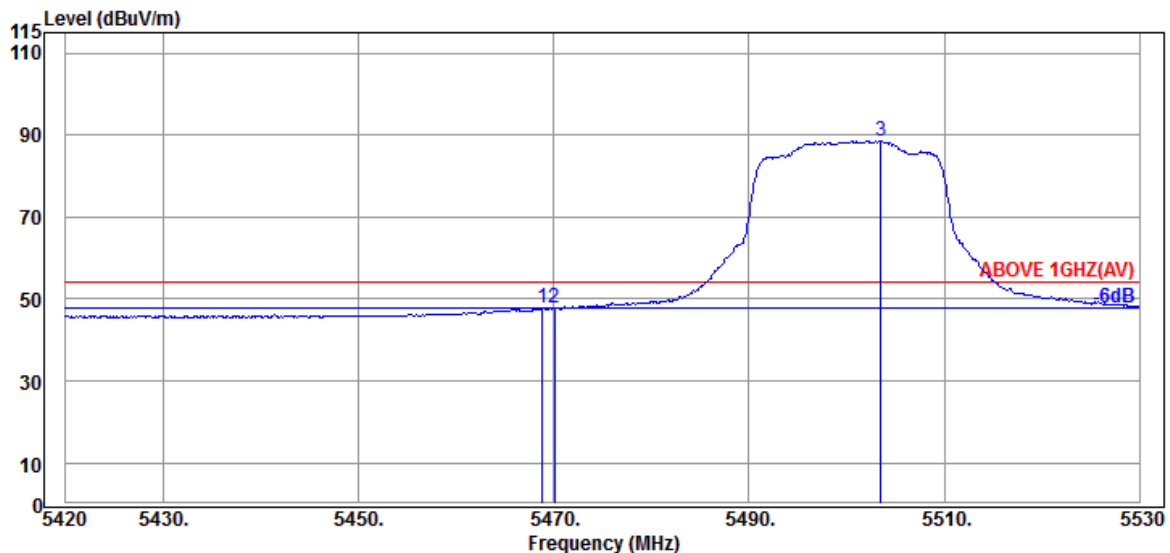


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.17	9.06	39.26	43.78	47.75	54.00	6.25	Average
5470.050	34.17	9.06	39.26	43.68	47.65	54.00	6.35	Average
@ 5503.490	34.10	9.08	39.26	84.67	88.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

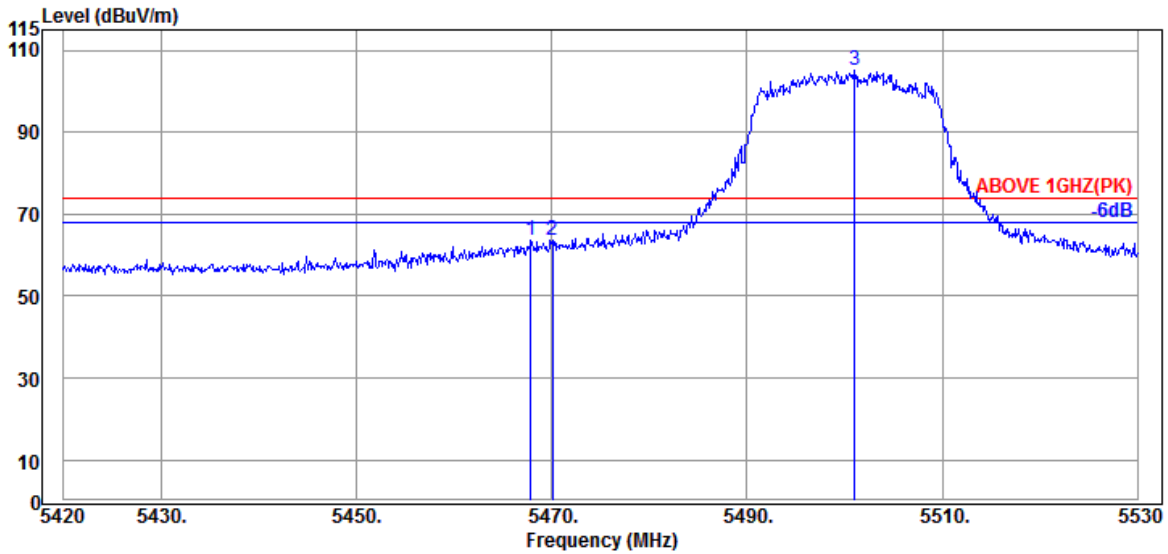

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.17	9.06	39.26	59.75	63.72	74.00	10.28	Peak
5470.050	34.17	9.06	39.26	59.57	63.54	74.00	10.46	Peak
@ 5501.070	34.10	9.08	39.26	101.14	105.06	---	---	Peak

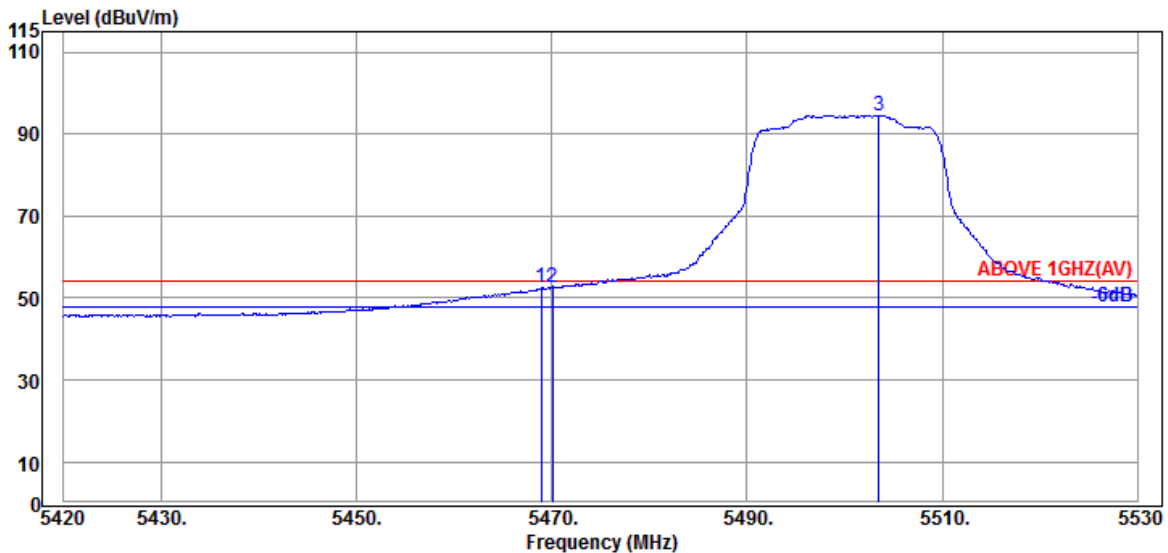


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	48.43	52.40	54.00	1.60	Average
5470.050	34.17	9.06	39.26	48.52	52.49	54.00	1.51	Average
@ 5503.490	34.10	9.08	39.26	90.71	94.63	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

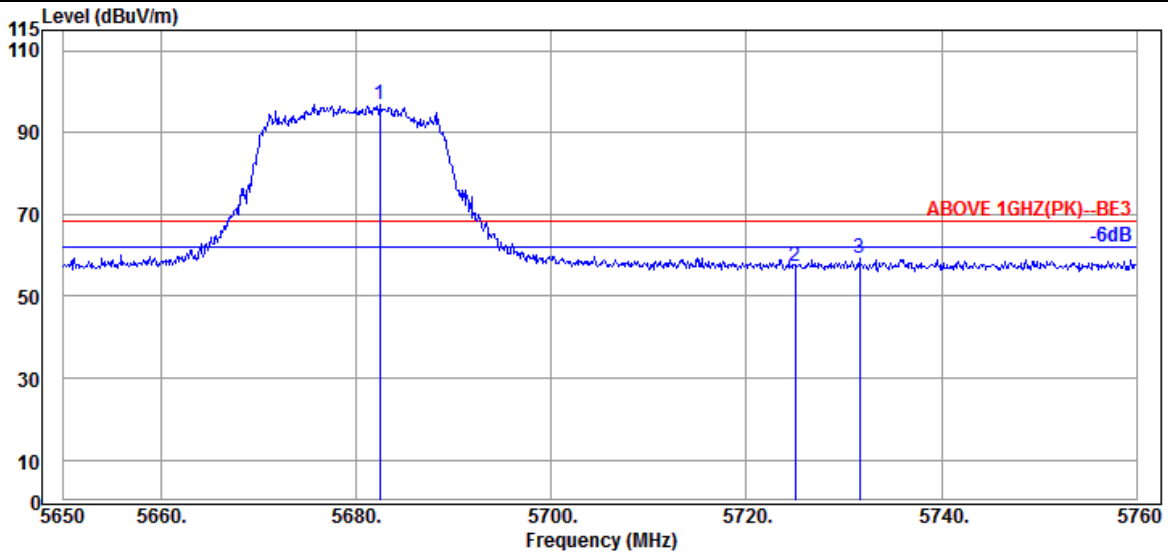

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.450	33.87	9.17	39.30	93.04	96.78	---	---	Peak
5725.020	33.80	9.20	39.30	53.68	57.38	68.20	10.82	Peak
5731.620	33.80	9.20	39.31	55.40	59.09	68.20	9.11	Peak

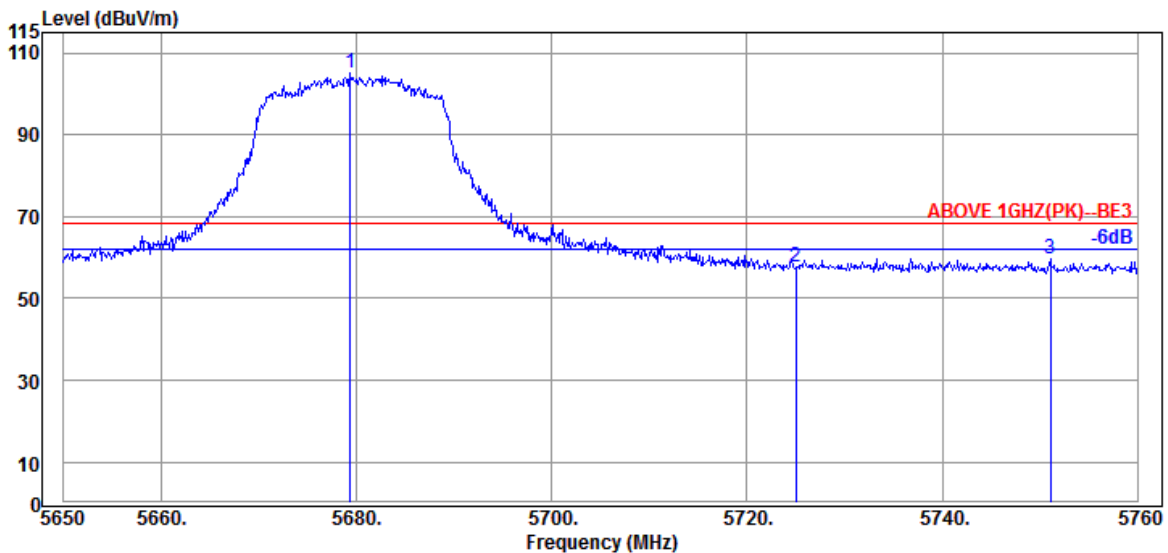


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.370	33.87	9.17	39.30	101.35	105.09	---	---	Peak
5725.020	33.80	9.20	39.30	53.84	57.54	68.20	10.66	Peak
5751.090	33.80	9.20	39.31	55.91	59.60	68.20	8.60	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

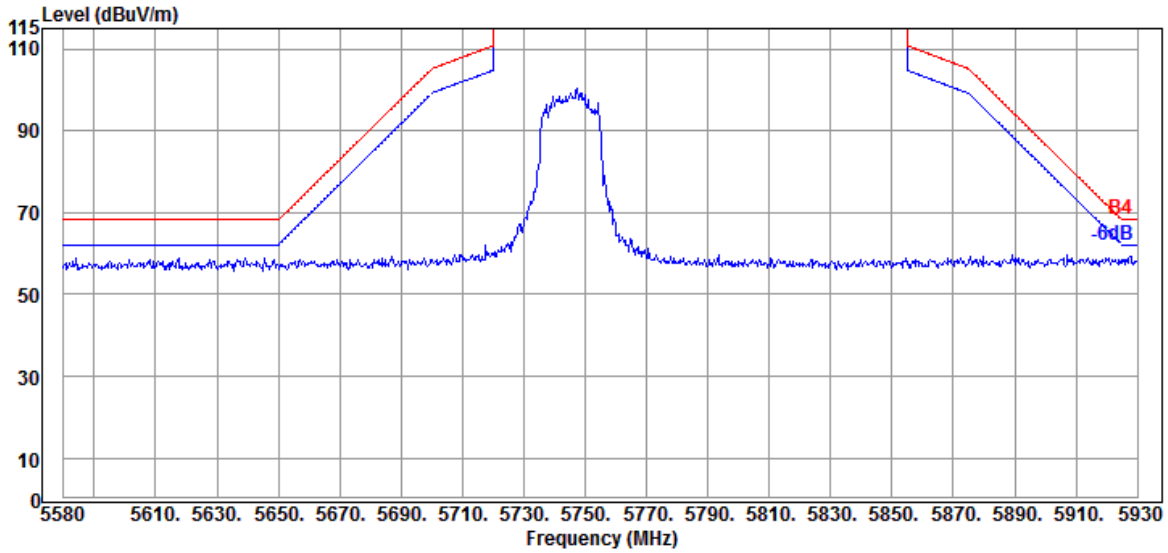


Antenna at Vertical Polarization

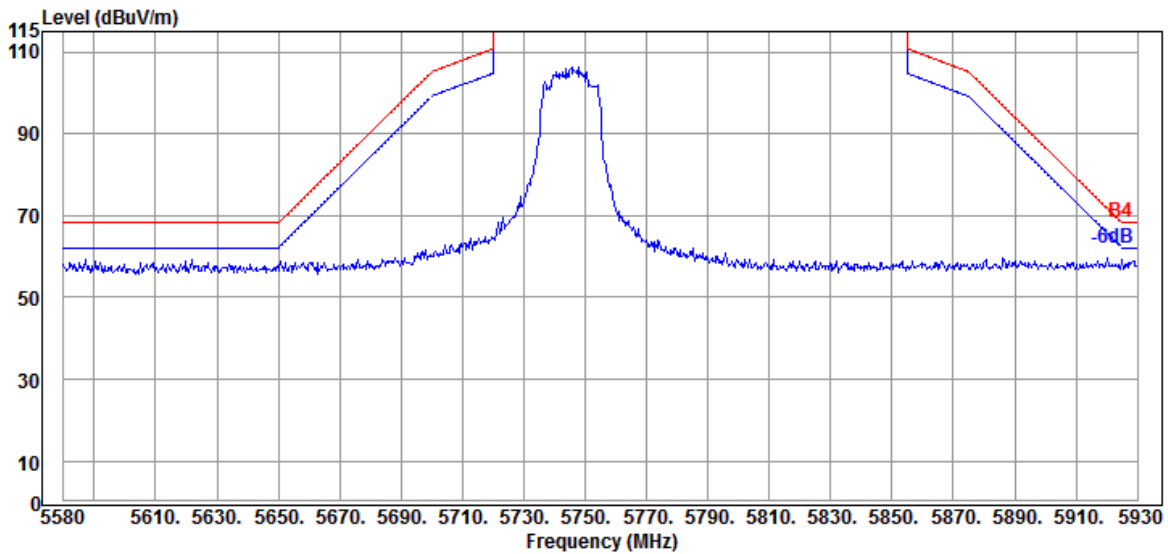


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

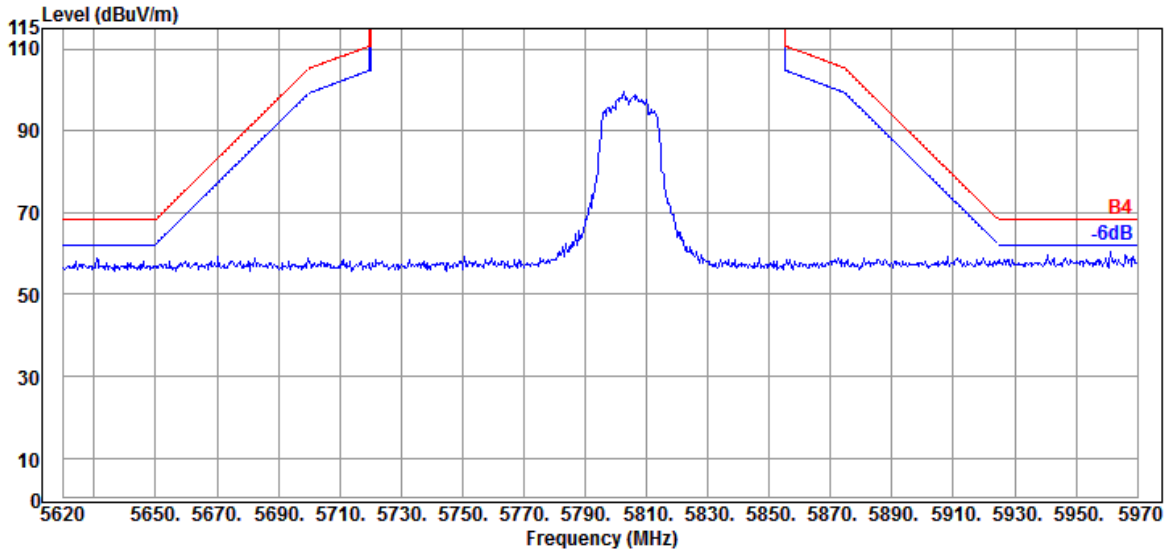

Antenna at Vertical Polarization

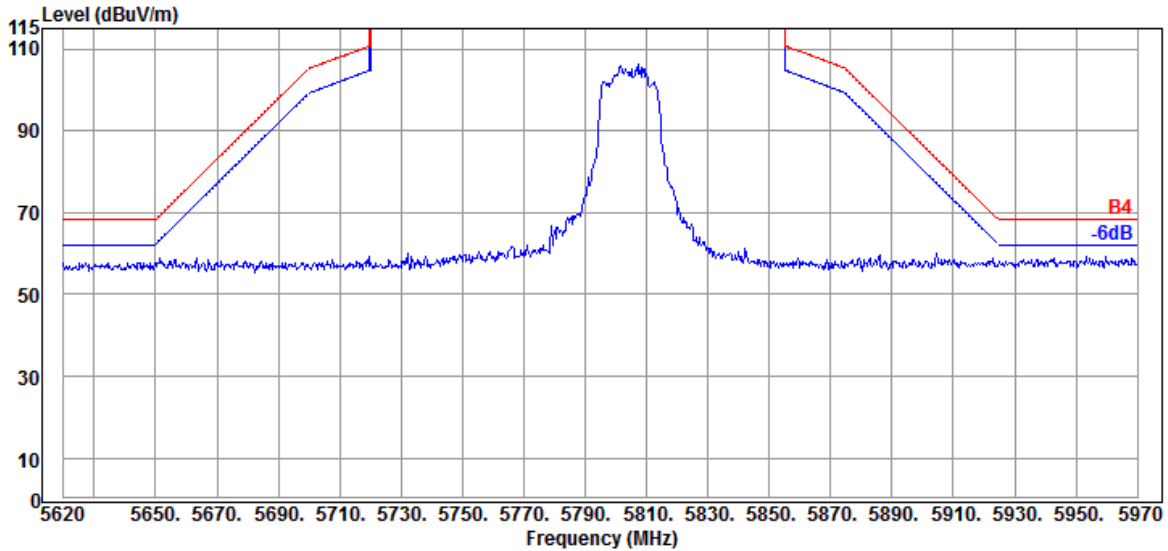


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

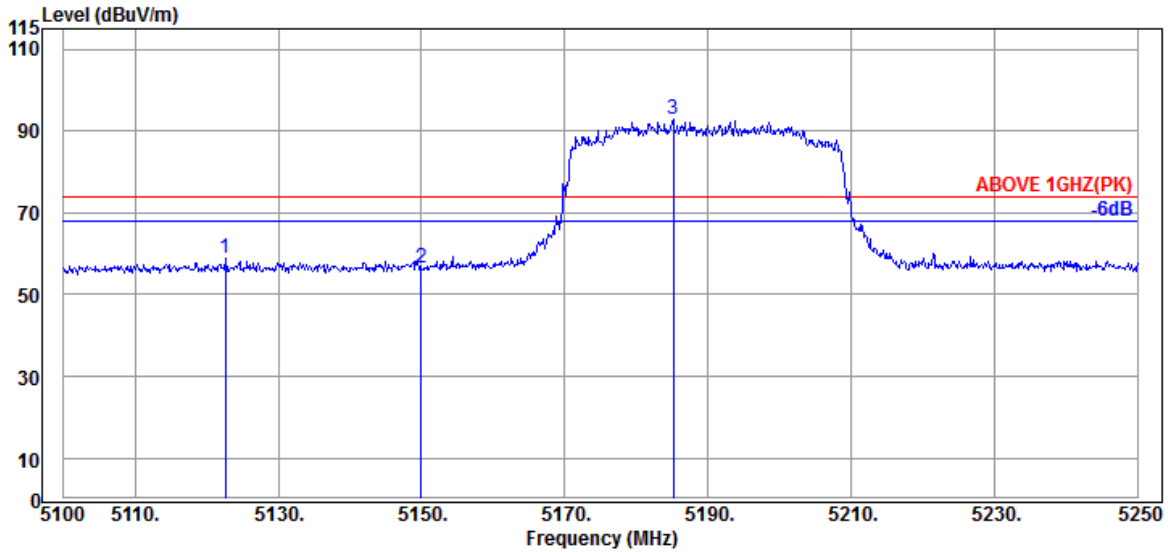

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.650	33.70	8.87	39.29	55.61	58.89	74.00	15.11	Peak
5149.950	33.70	8.88	39.29	53.27	56.56	74.00	17.44	Peak
@ 5185.200	33.70	8.90	39.28	89.54	92.86	---	---	Peak

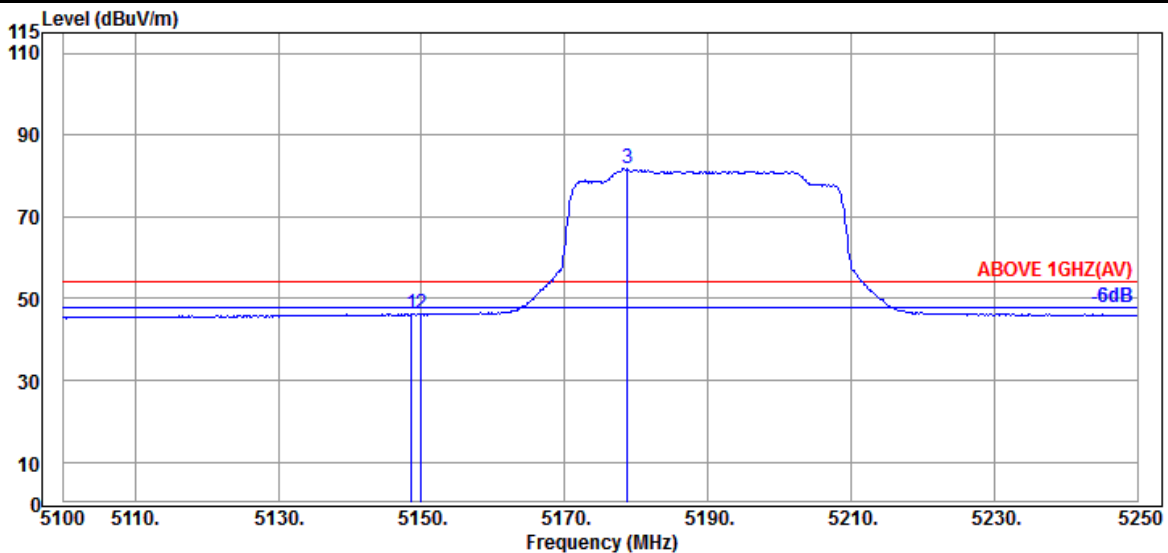


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.70	8.88	39.29	43.03	46.32	54.00	7.68	Average
5149.950	33.70	8.88	39.29	42.83	46.12	54.00	7.88	Average
@ 5178.750	33.70	8.90	39.28	78.37	81.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

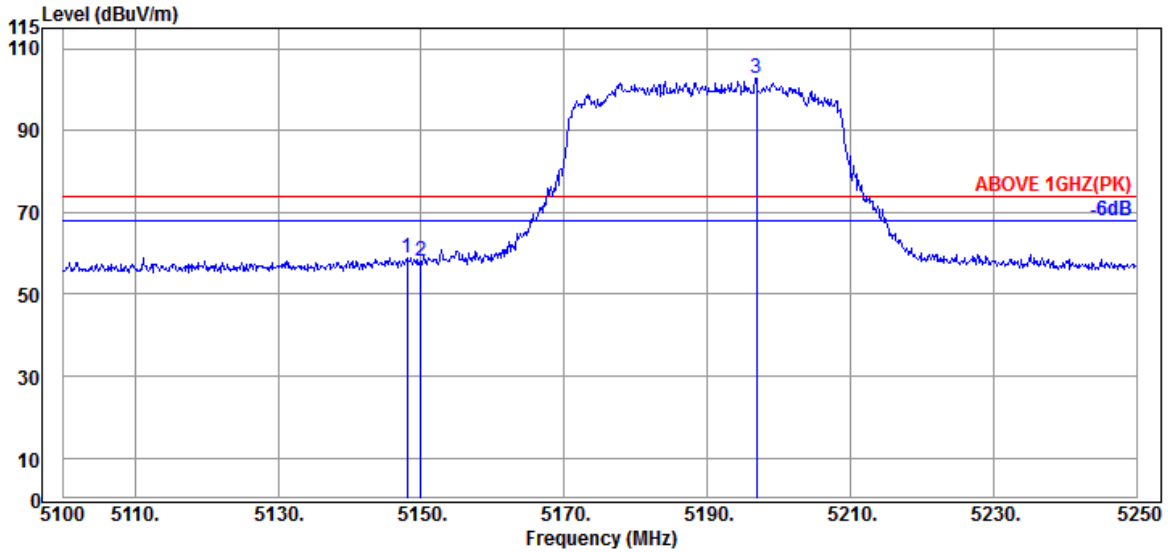

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	33.70	8.88	39.29	55.61	58.90	74.00	15.10	Peak
5149.950	33.70	8.88	39.29	54.88	58.17	74.00	15.83	Peak
@ 5196.900	33.70	8.91	39.28	99.38	102.71	---	---	Peak

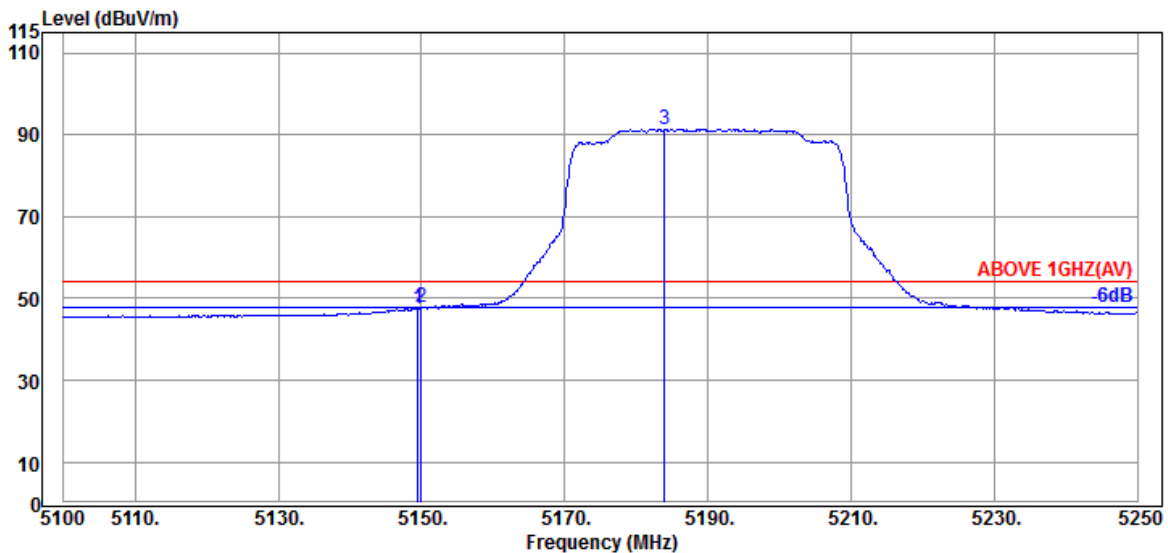


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	44.24	47.53	54.00	6.47	Average
5149.950	33.70	8.88	39.29	44.54	47.83	54.00	6.17	Average
@ 5184.000	33.70	8.90	39.28	88.02	91.34	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

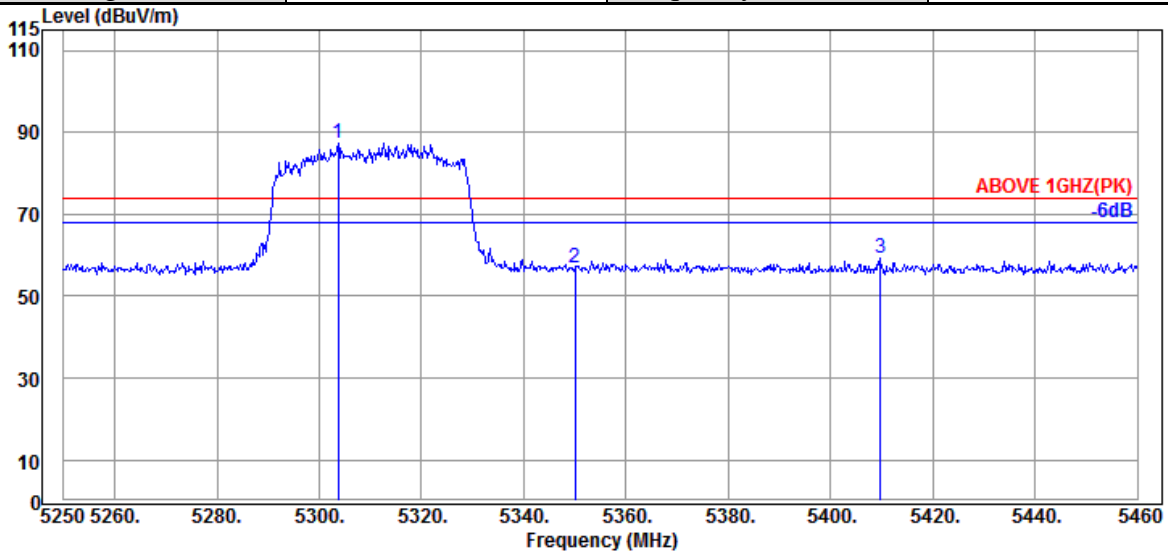

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.760	34.10	8.97	39.28	83.46	87.25	---	---	Peak
5349.960	33.90	8.99	39.27	53.17	56.79	74.00	17.21	Peak
5409.810	34.12	9.03	39.27	55.37	59.25	74.00	14.75	Peak

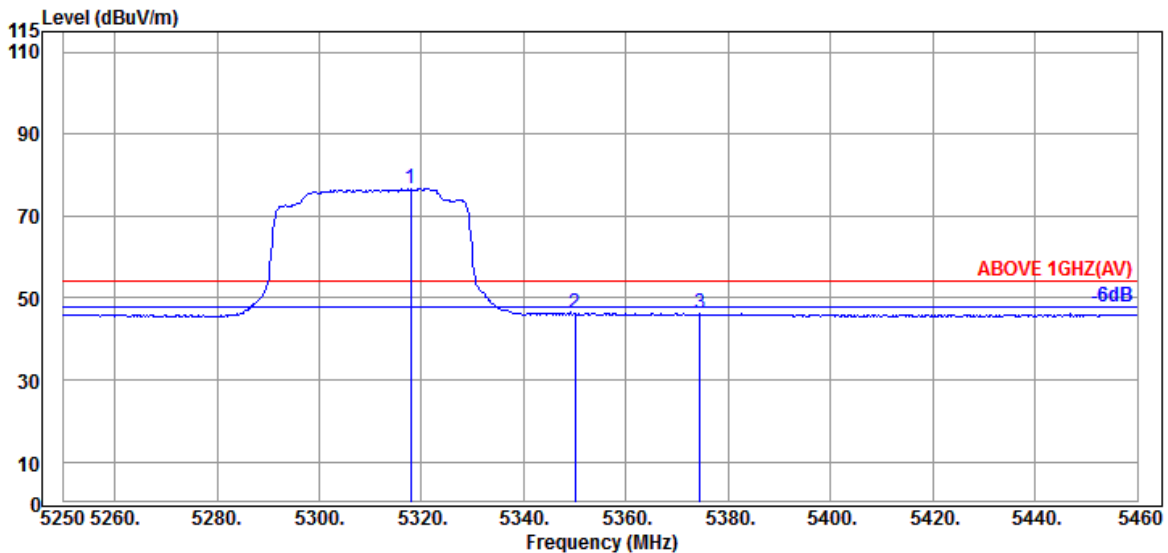


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.830	34.03	8.98	39.27	73.03	76.77	---	---	Average
5349.960	33.90	8.99	39.27	42.49	46.11	54.00	7.89	Average
5374.530	34.03	9.01	39.27	42.53	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

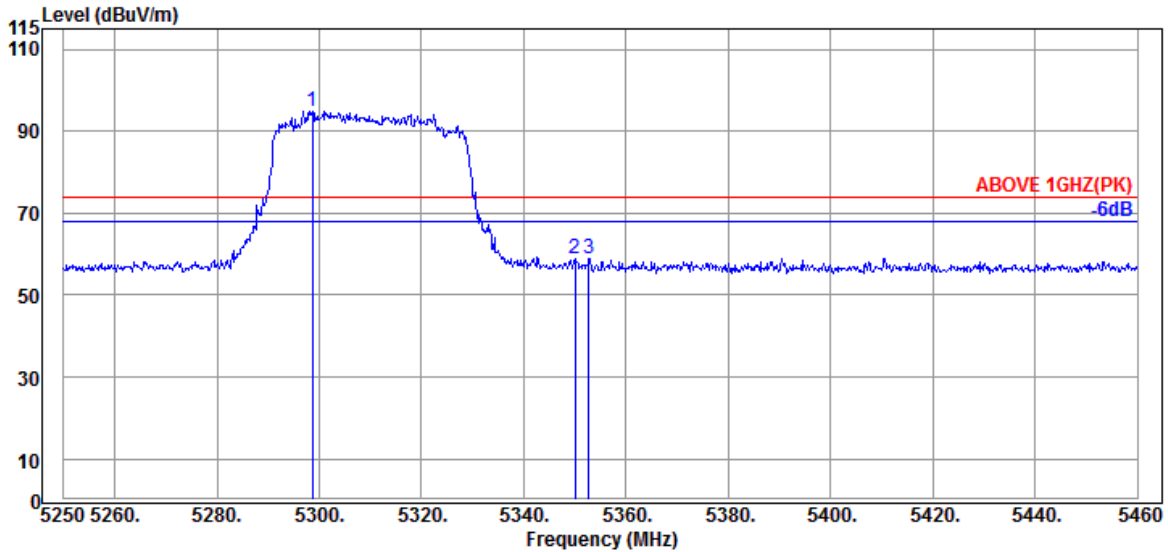

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.720	34.10	8.97	39.28	91.25	95.04	---	---	Peak
5349.960	33.90	8.99	39.27	55.26	58.88	74.00	15.12	Peak
5352.690	33.90	8.99	39.27	55.43	59.05	74.00	14.95	Peak

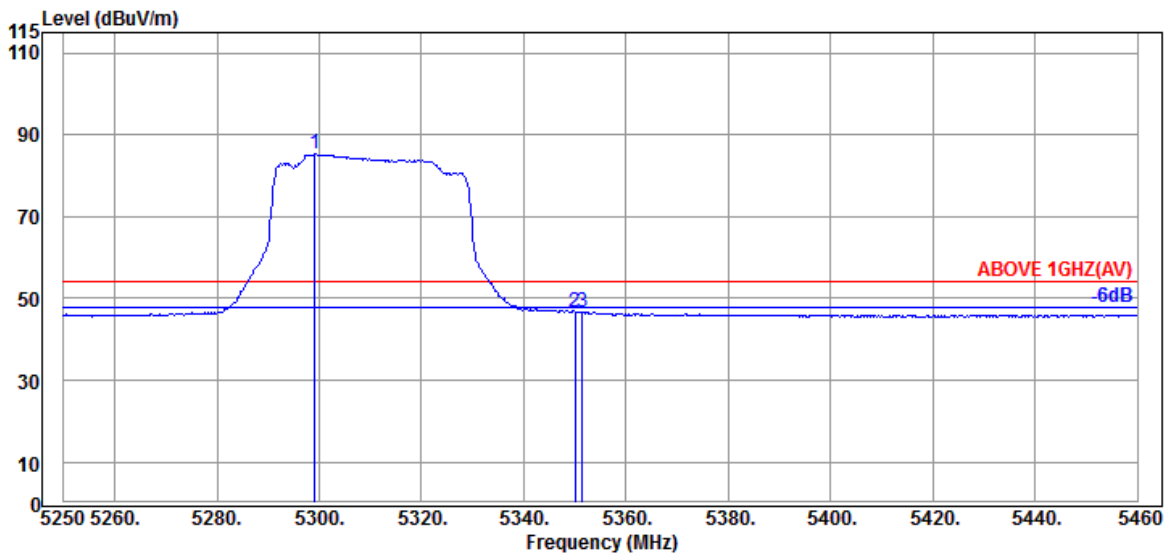


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.140	34.10	8.97	39.28	81.53	85.32	---	---	Average
5349.960	33.90	8.99	39.27	42.90	46.52	54.00	7.48	Average
5351.430	33.90	8.99	39.27	43.11	46.73	54.00	7.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

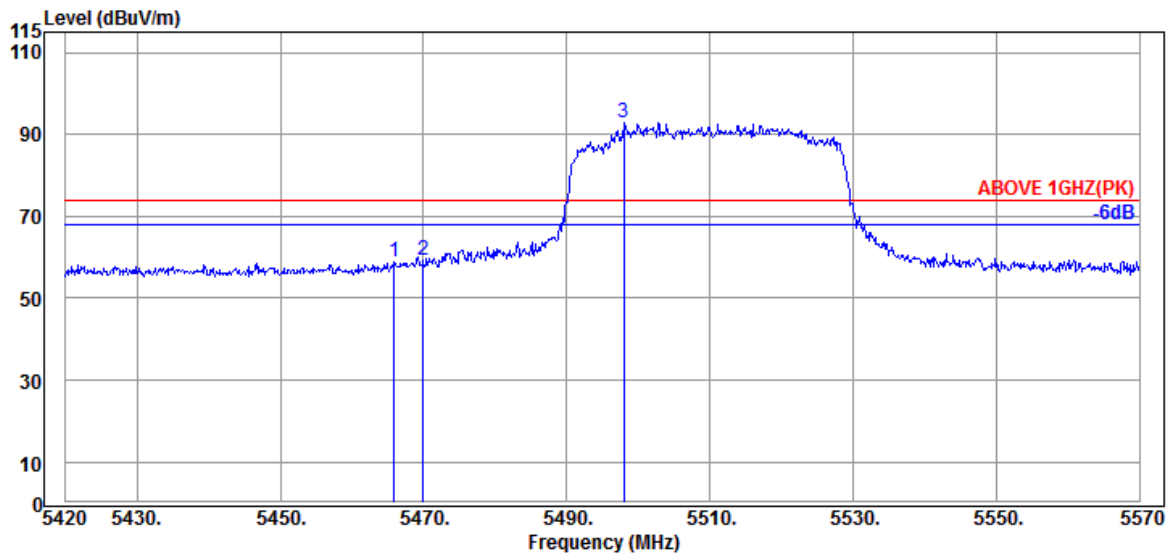

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	9.06	39.26	54.91	58.88	74.00	15.12	Peak
5469.950	34.17	9.06	39.26	55.33	59.30	74.00	14.70	Peak
@ 5498.000	34.10	9.08	39.26	88.89	92.81	---	---	Peak

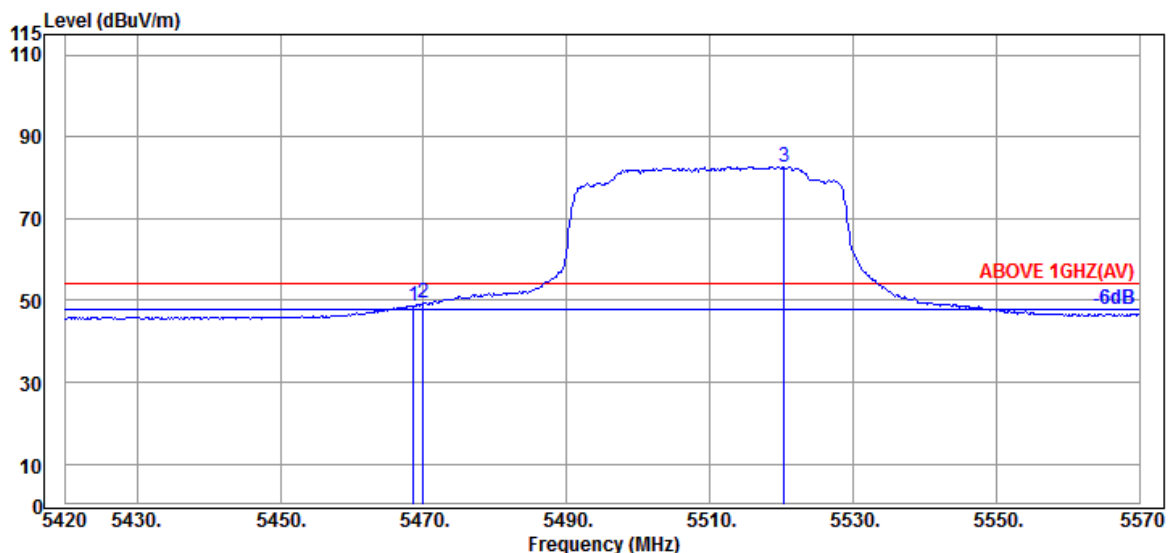


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.17	9.06	39.26	44.82	48.79	54.00	5.21	Average
5469.950	34.17	9.06	39.26	45.24	49.21	54.00	4.79	Average
@ 5520.350	34.10	9.09	39.26	78.81	82.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

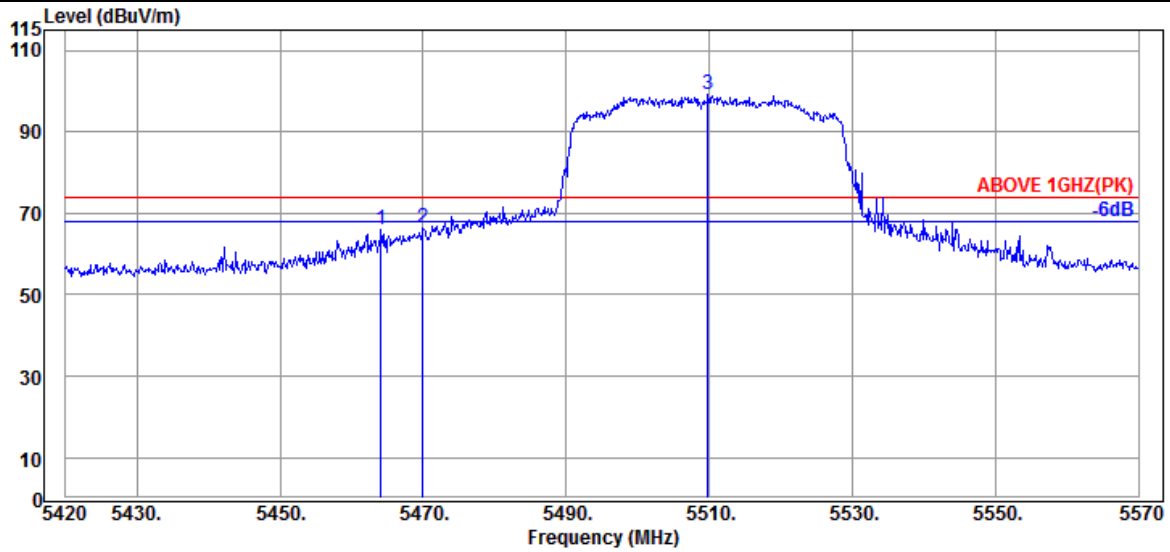

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	9.06	39.26	62.12	66.09	74.00	7.91	Peak
5469.950	34.17	9.06	39.26	62.55	66.52	74.00	7.48	Peak
@ 5509.850	34.10	9.08	39.26	95.21	99.13	---	---	Peak

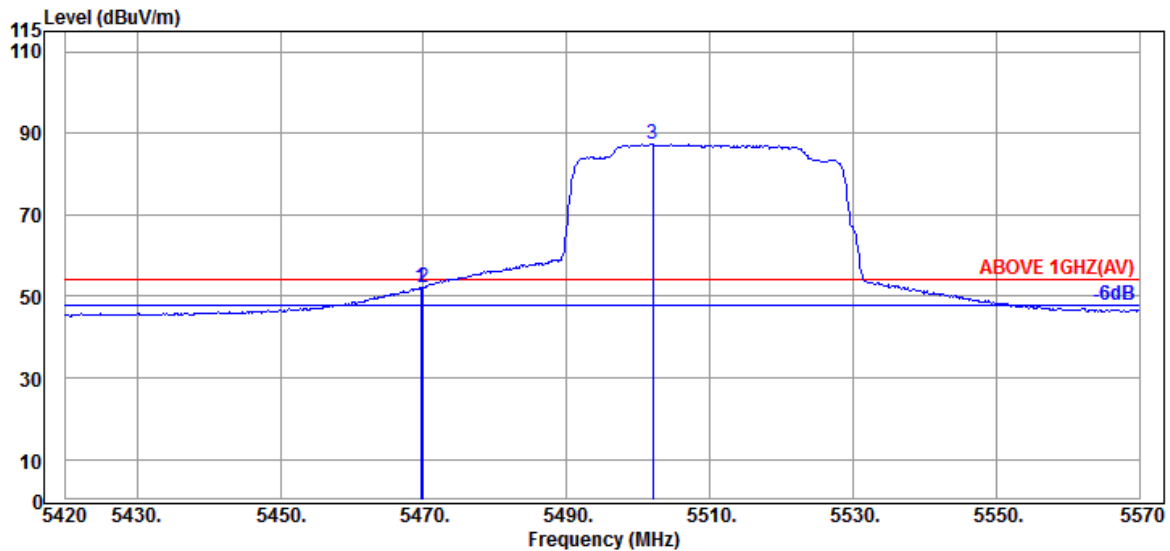


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.17	9.06	39.26	48.30	52.27	54.00	1.73	Average
5469.950	34.17	9.06	39.26	48.27	52.24	54.00	1.76	Average
@ 5502.050	34.10	9.08	39.26	83.34	87.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

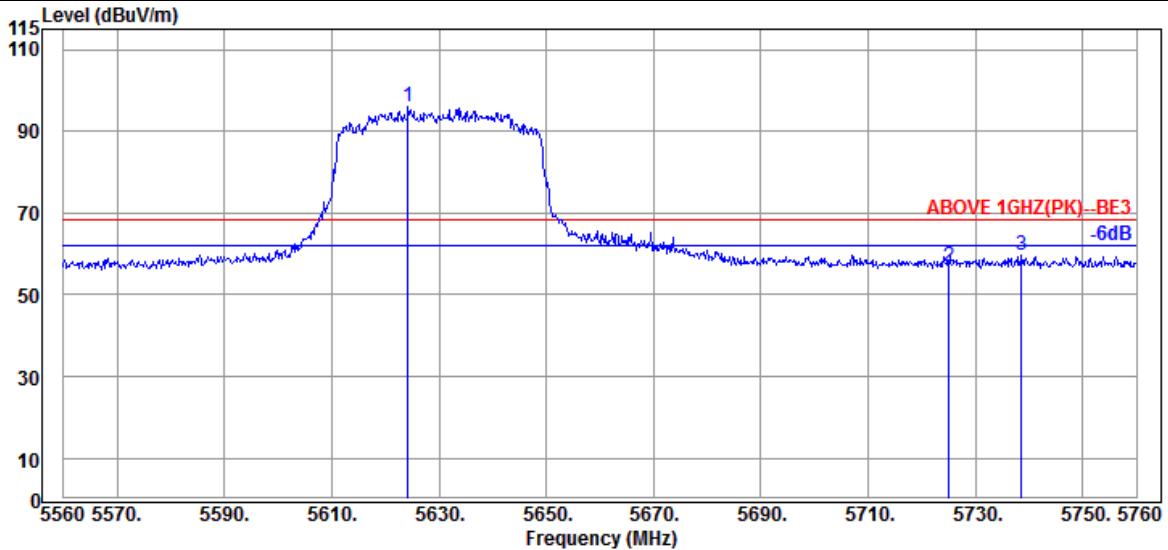

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.200	34.00	9.14	39.29	92.09	95.94	---	---	Peak
5725.000	33.80	9.20	39.30	53.18	56.88	68.20	11.32	Peak
5738.600	33.80	9.20	39.31	56.03	59.72	68.20	8.48	Peak

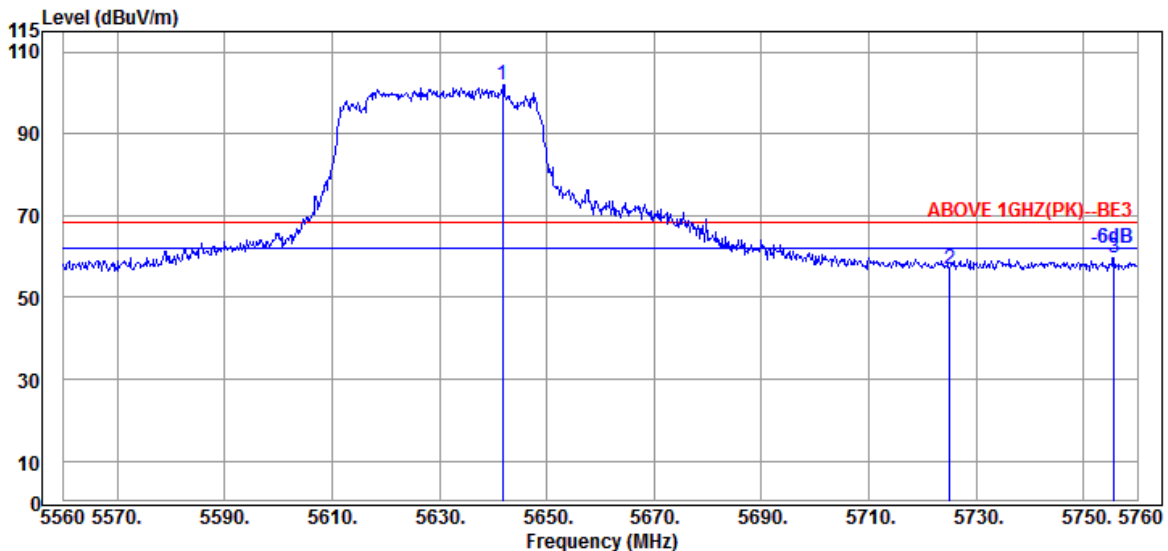


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5641.800	34.00	9.15	39.29	98.22	102.08	---	---	Peak
5725.000	33.80	9.20	39.30	53.33	57.03	68.20	11.17	Peak
5755.600	33.87	9.21	39.31	55.91	59.68	68.20	8.52	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

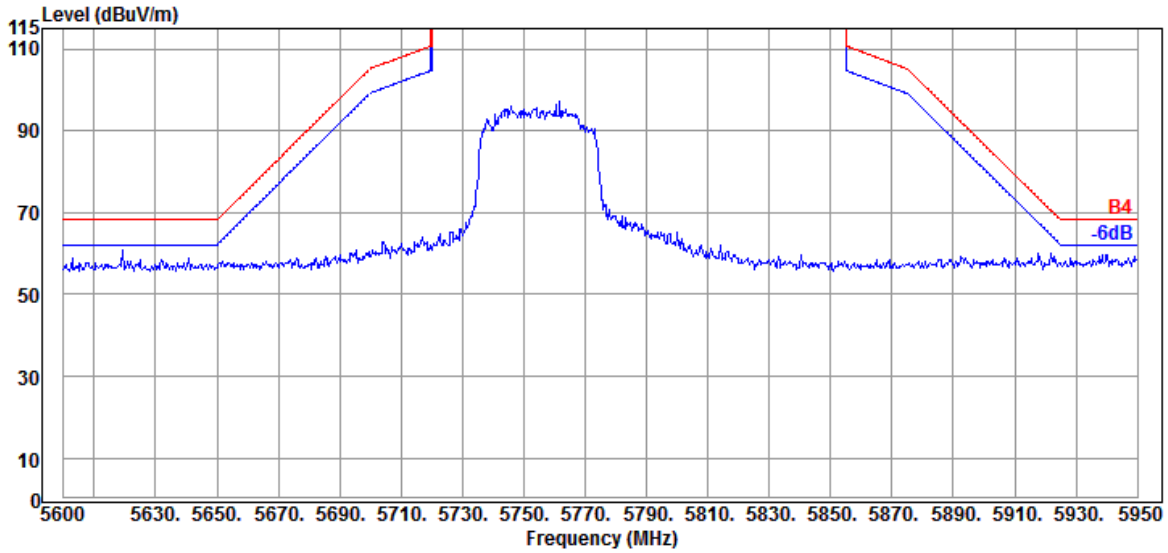


Antenna at Vertical Polarization

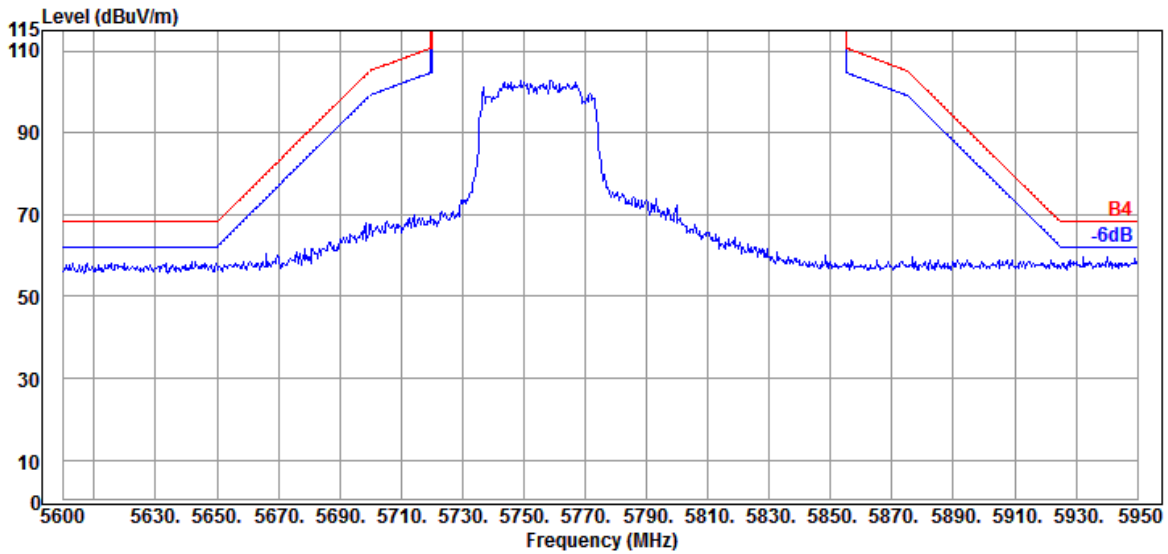


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

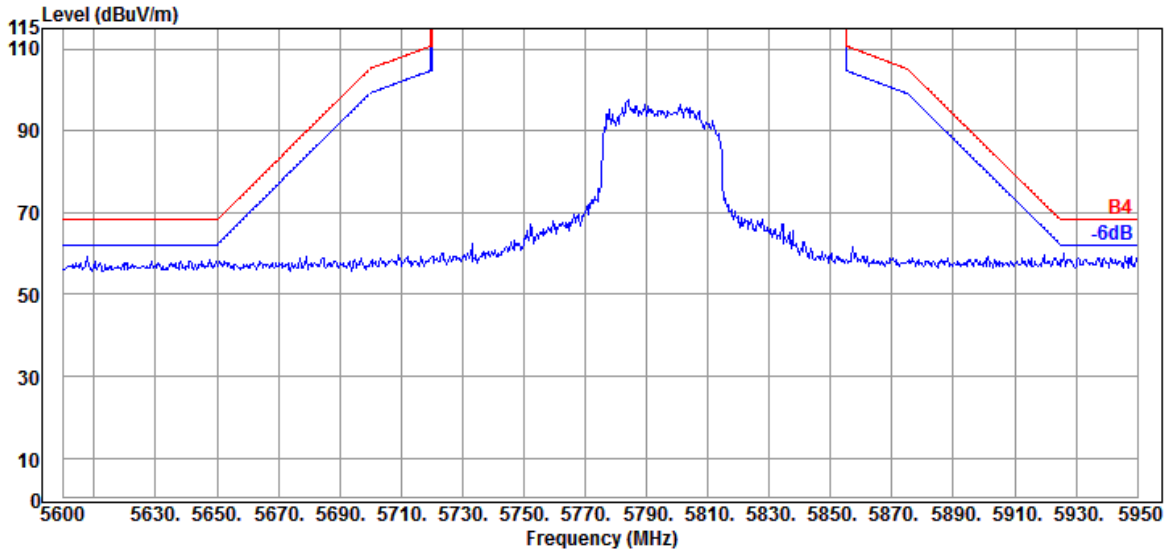

Antenna at Vertical Polarization

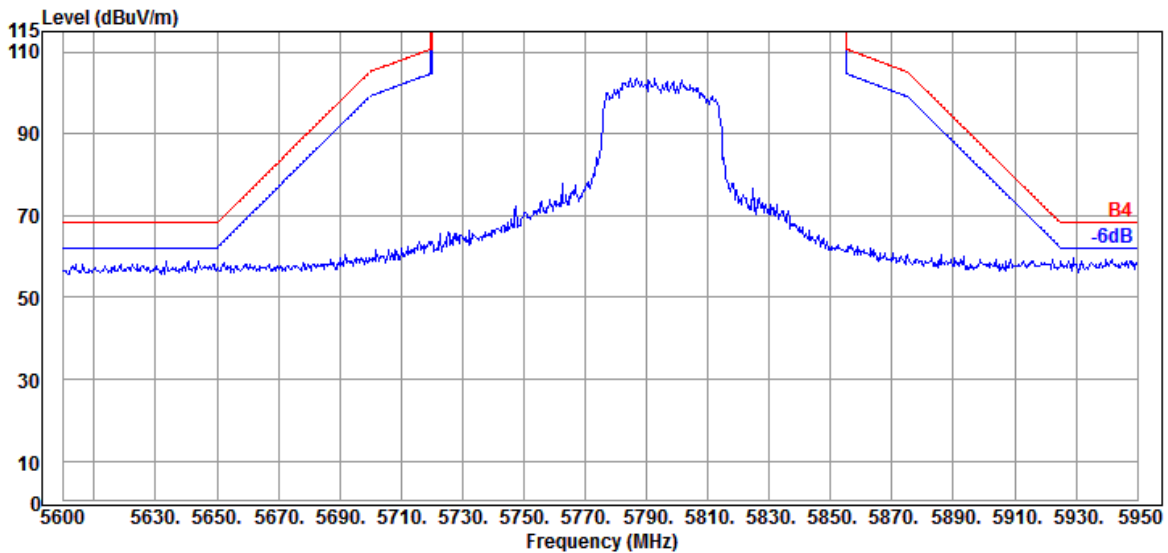


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

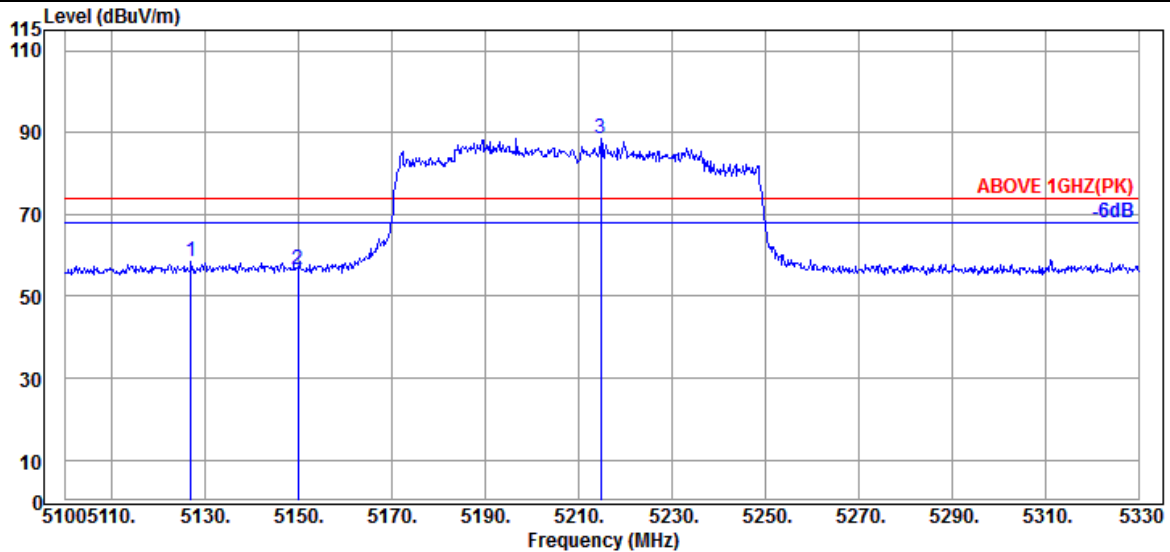

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.910	33.70	8.87	39.29	55.32	58.60	74.00	15.40	Peak
5149.910	33.70	8.88	39.29	53.41	56.70	74.00	17.30	Peak
@ 5214.770	33.72	8.92	39.28	85.33	88.69	---	---	Peak

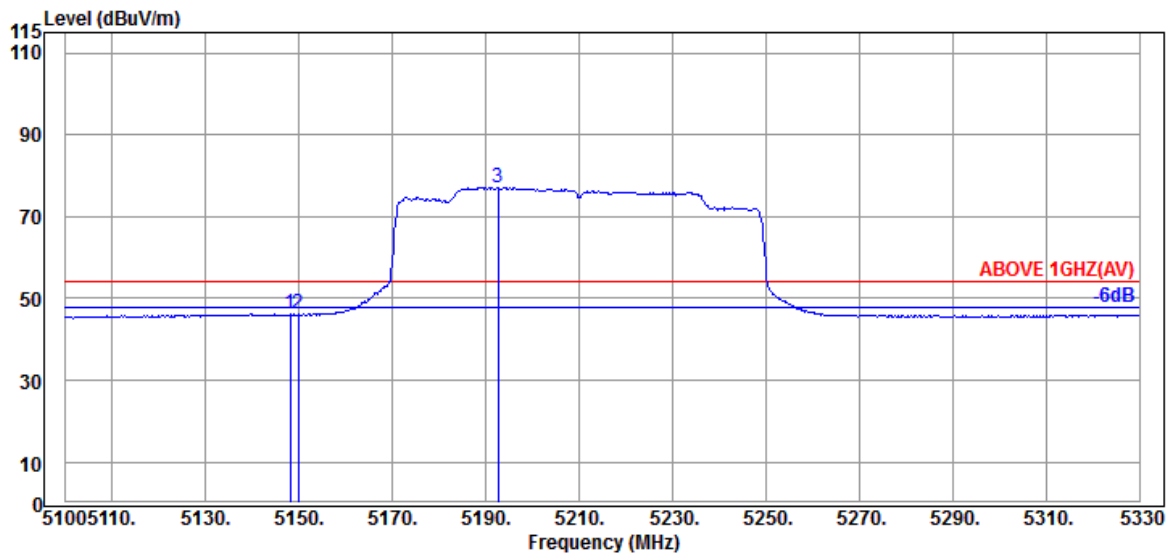


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	33.70	8.88	39.29	42.89	46.18	54.00	7.82	Average
5149.910	33.70	8.88	39.29	42.88	46.17	54.00	7.83	Average
@ 5192.690	33.70	8.91	39.28	73.88	77.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

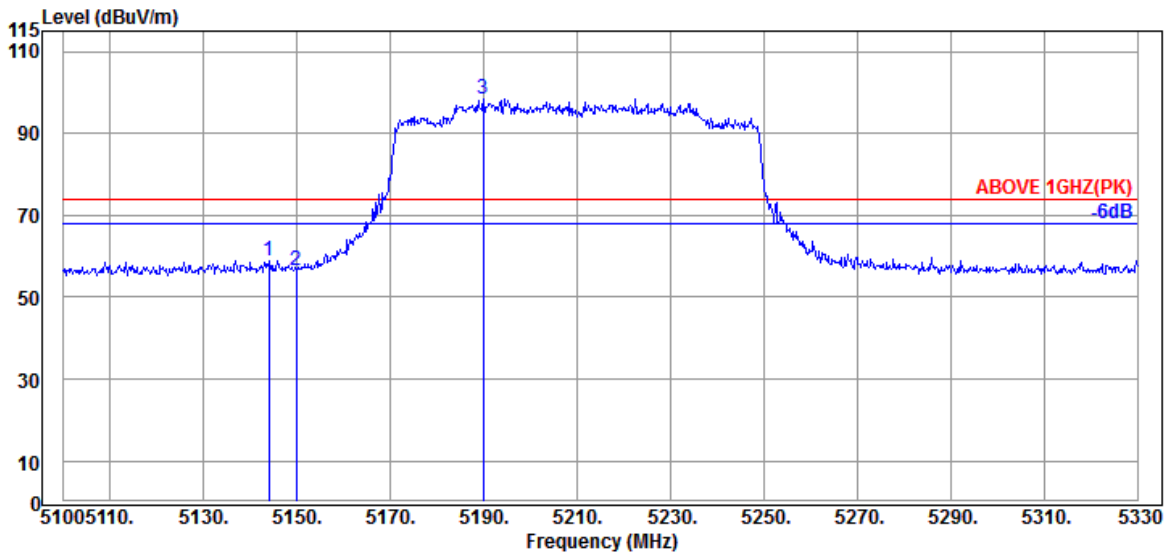

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.930	33.70	8.88	39.29	55.71	59.00	74.00	15.00	Peak
5149.910	33.70	8.88	39.29	53.28	56.57	74.00	17.43	Peak
@ 5189.930	33.70	8.91	39.28	95.22	98.55	---	---	Peak

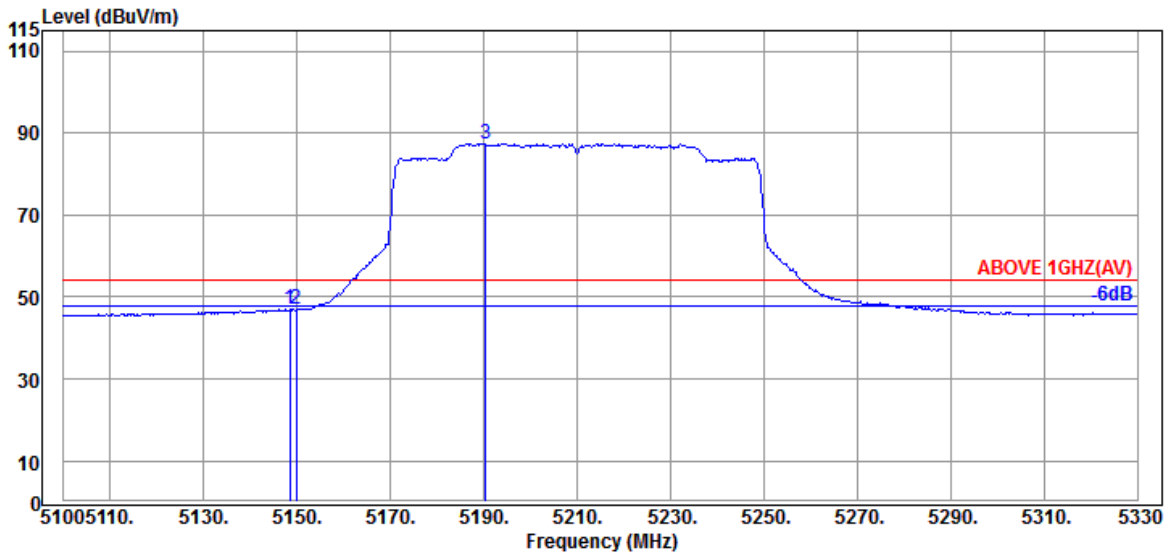


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.530	33.70	8.88	39.29	43.77	47.06	54.00	6.94	Average
5149.910	33.70	8.88	39.29	43.54	46.83	54.00	7.17	Average
@ 5190.390	33.70	8.91	39.28	84.11	87.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

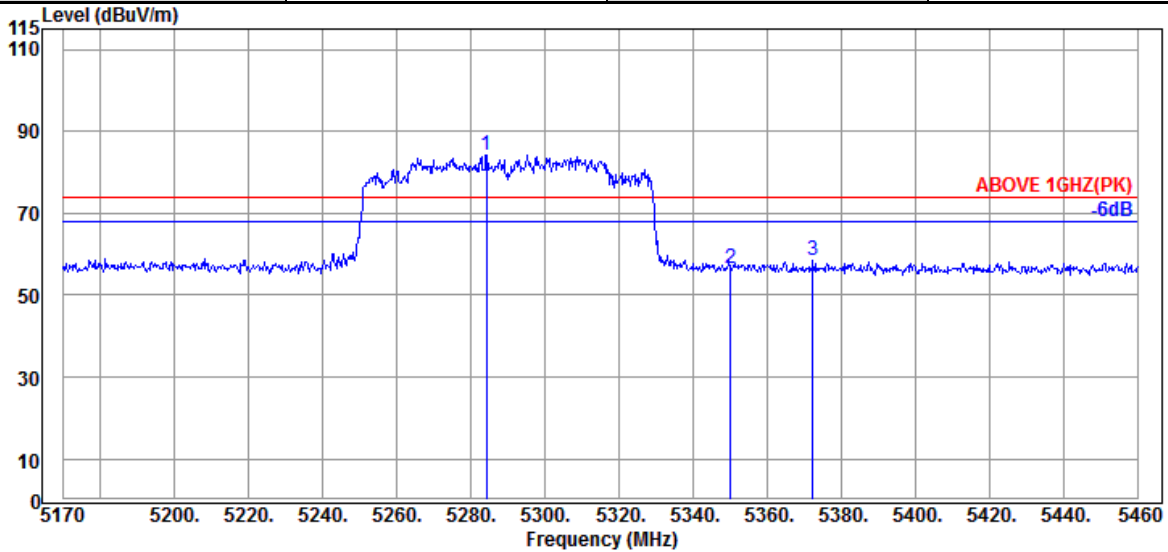

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.260	34.00	8.96	39.28	80.57	84.25	---	---	Peak
5350.090	33.90	8.99	39.27	52.92	56.54	74.00	17.46	Peak
5372.420	34.03	9.01	39.27	54.56	58.33	74.00	15.67	Peak

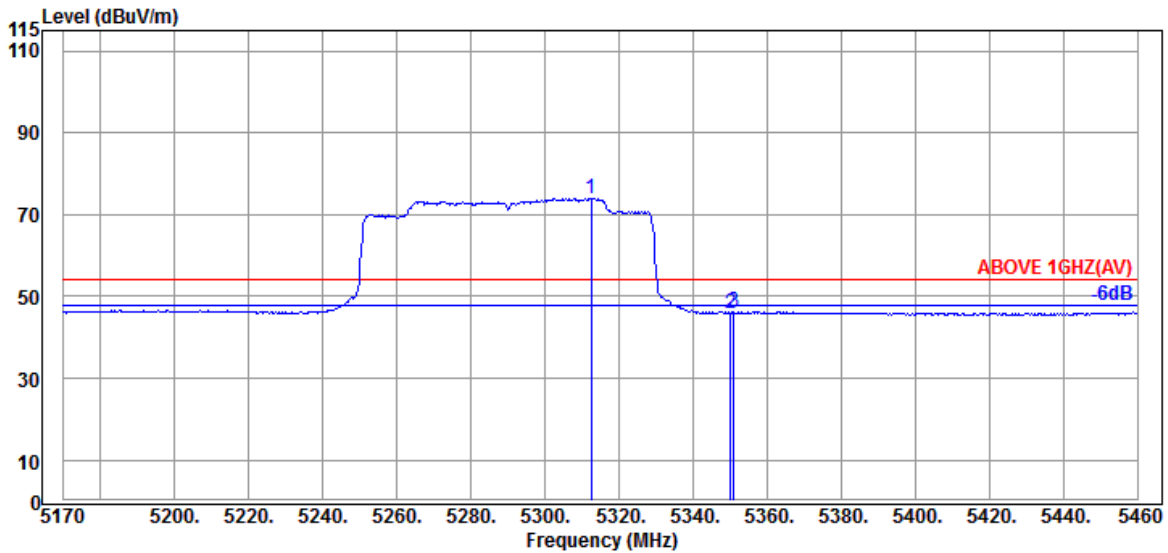


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.390	34.03	8.98	39.27	70.34	74.08	---	---	Average
5350.090	33.90	8.99	39.27	42.35	45.97	54.00	8.03	Average
5350.960	33.90	8.99	39.27	42.56	46.18	54.00	7.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

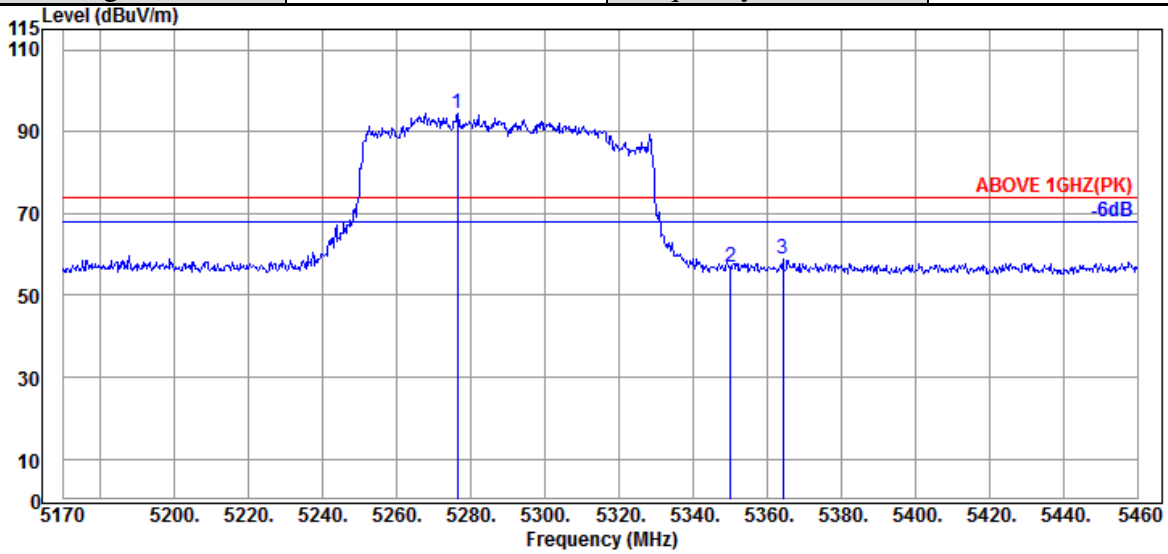

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.430	33.90	8.95	39.28	90.95	94.52	---	---	Peak
5350.090	33.90	8.99	39.27	53.39	57.01	74.00	16.99	Peak
5364.300	33.97	9.00	39.27	55.23	58.93	74.00	15.07	Peak

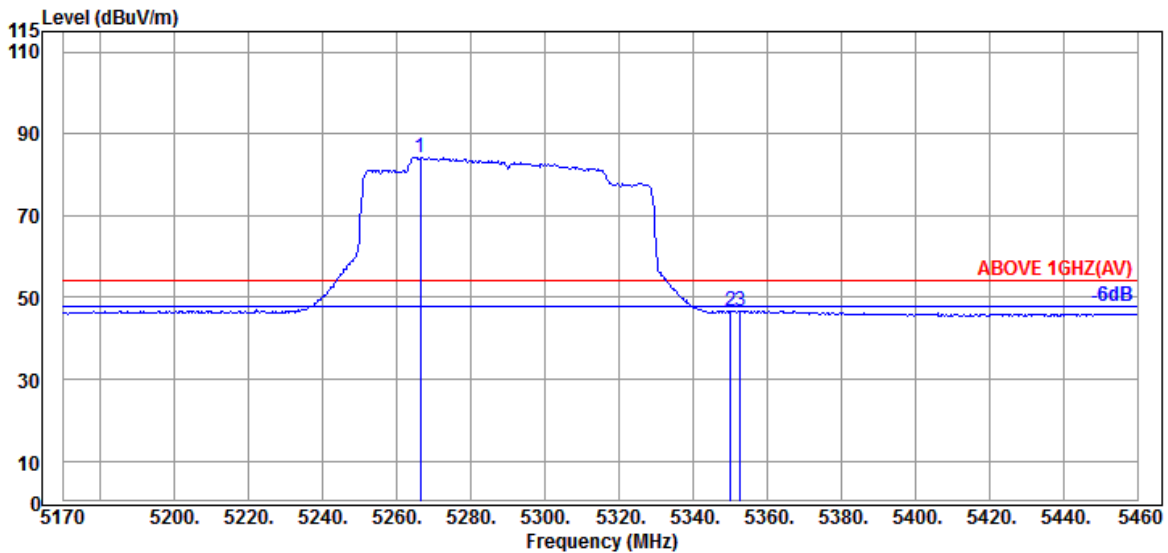


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.280	33.90	8.95	39.28	80.61	84.18	---	---	Average
5350.090	33.90	8.99	39.27	42.99	46.61	54.00	7.39	Average
5352.700	33.90	8.99	39.27	43.04	46.66	54.00	7.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

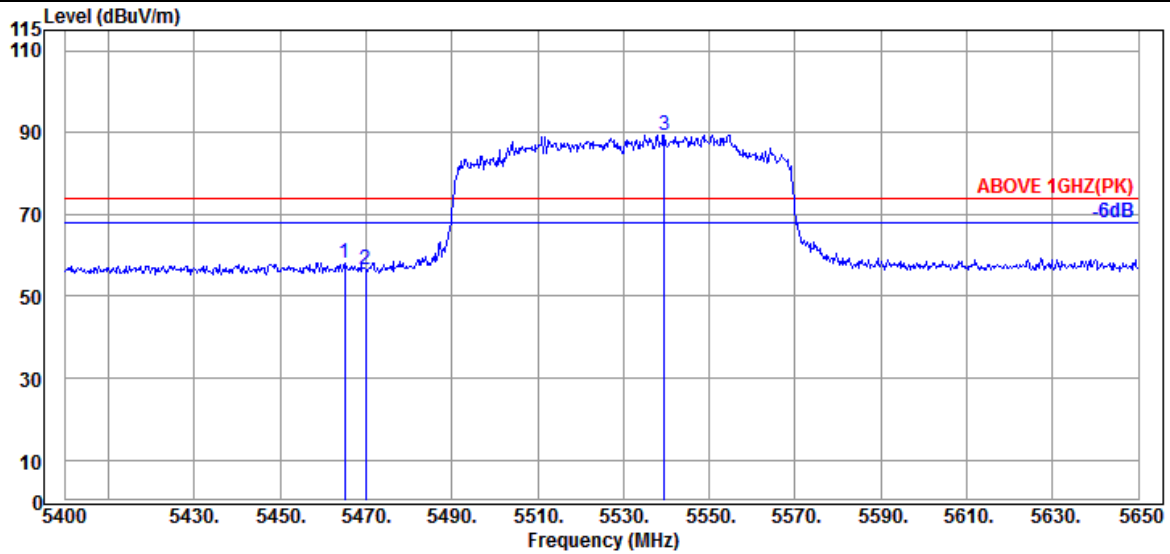

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	9.06	39.26	54.29	58.26	74.00	15.74	Peak
5470.000	34.17	9.06	39.26	52.37	56.34	74.00	17.66	Peak
@ 5539.500	34.10	9.09	39.27	85.41	89.33	---	---	Peak

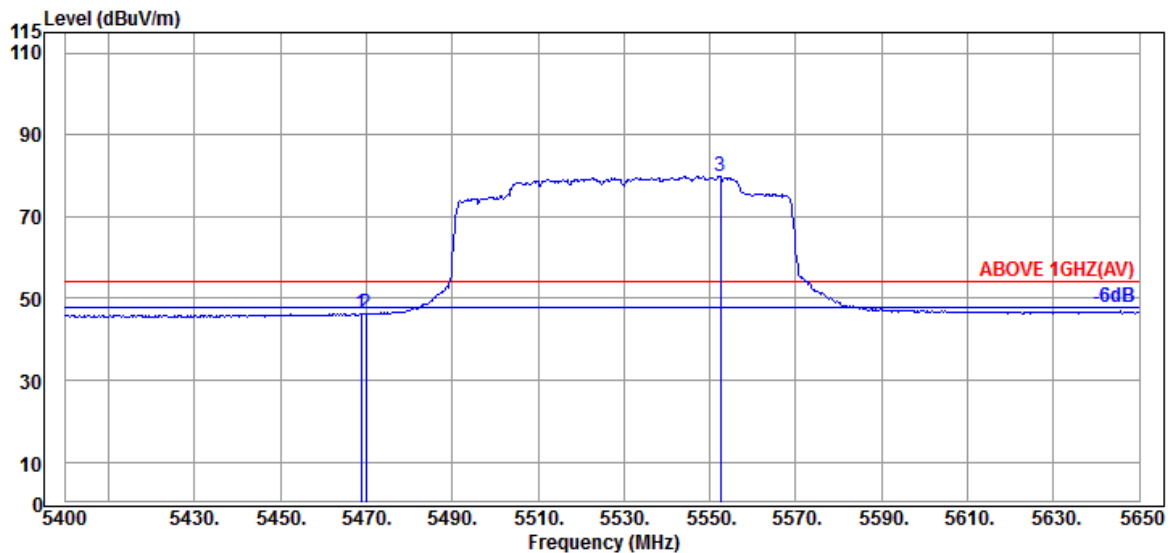


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.17	9.06	39.26	42.36	46.33	54.00	7.67	Average
5470.000	34.17	9.06	39.26	42.32	46.29	54.00	7.71	Average
@ 5552.500	34.10	9.10	39.27	75.93	79.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

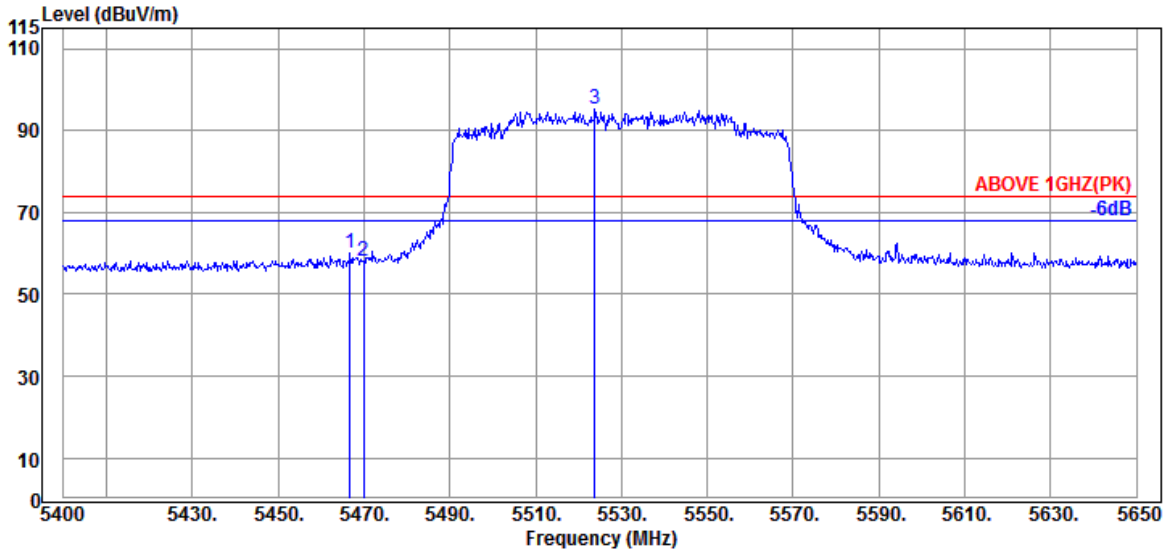

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	34.17	9.06	39.26	55.92	59.89	74.00	14.11	Peak
5470.000	34.17	9.06	39.26	54.10	58.07	74.00	15.93	Peak
@ 5523.750	34.10	9.09	39.27	91.20	95.12	---	---	Peak

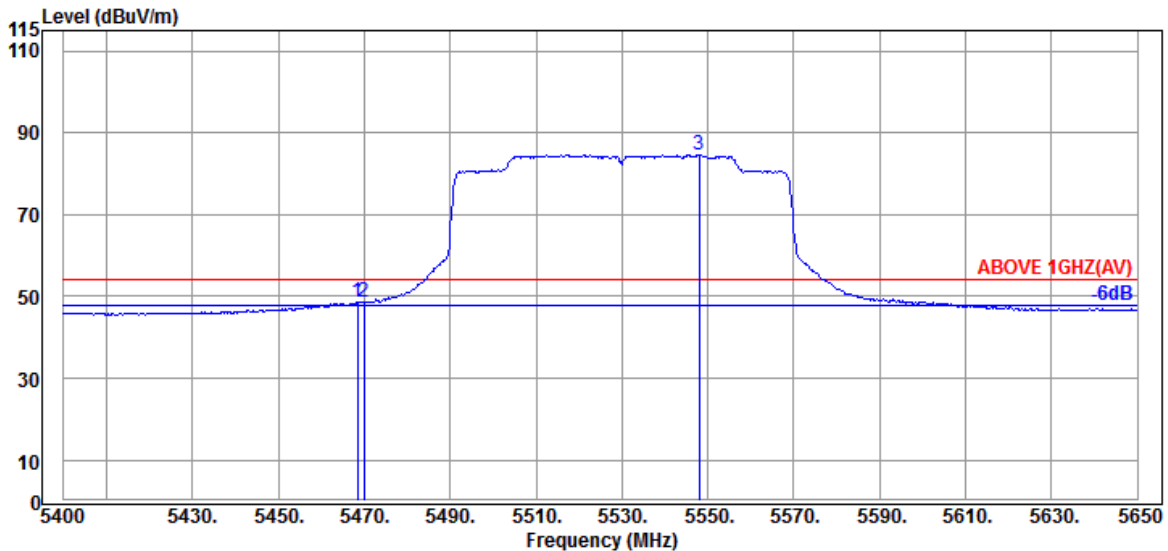


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.17	9.06	39.26	44.83	48.80	54.00	5.20	Average
5470.000	34.17	9.06	39.26	44.66	48.63	54.00	5.37	Average
@ 5548.000	34.10	9.10	39.27	80.74	84.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

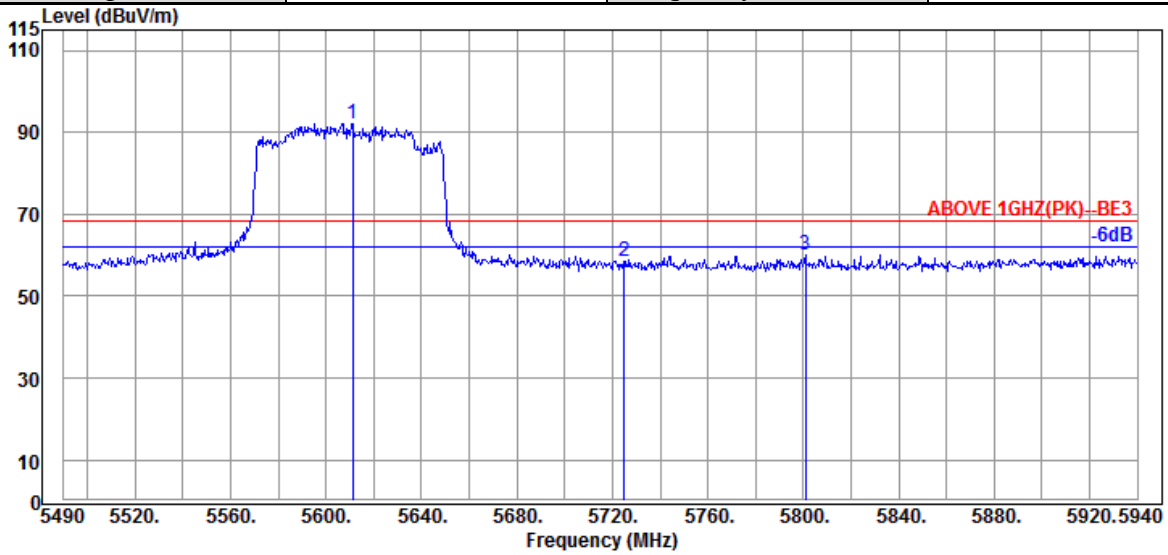

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5611.050	34.00	9.14	39.28	88.38	92.24	---	---	Peak
5724.900	33.80	9.20	39.30	54.59	58.29	68.20	9.91	Peak
5800.950	34.00	9.23	39.32	56.09	60.00	68.20	8.20	Peak

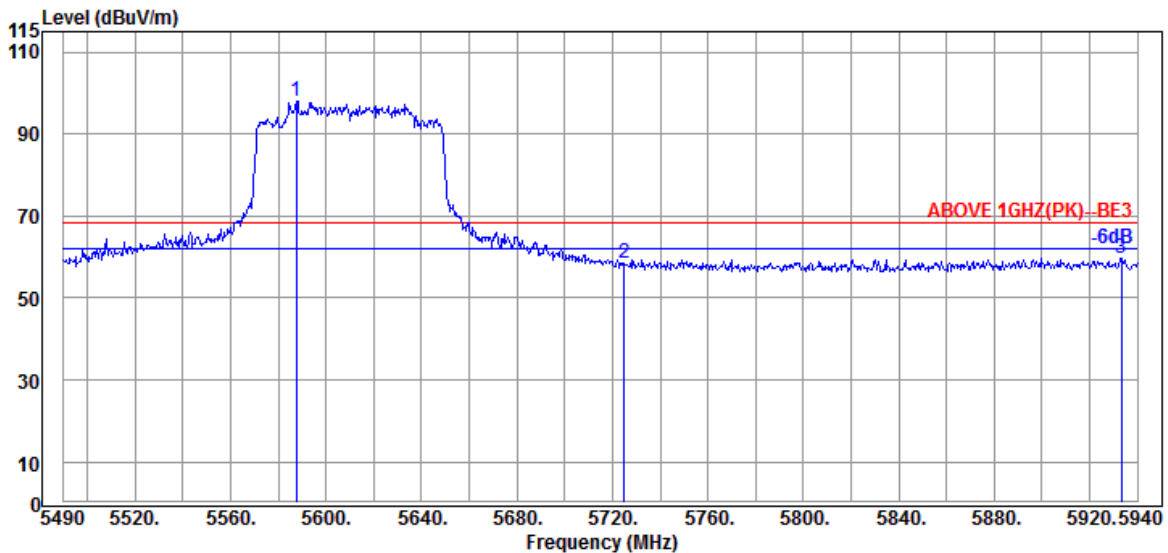

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.650	34.03	9.12	39.28	94.11	97.98	---	---	Peak
5724.900	33.80	9.20	39.30	54.59	58.29	68.20	9.91	Peak
5933.250	34.23	9.30	39.35	55.58	59.76	68.20	8.44	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	36.56	48.15	54.00	5.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	35.38	46.97	54.00	7.03	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	35.17	47.08	54.00	6.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	35.79	47.70	54.00	6.30	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	35.47	48.45	54.00	5.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	34.55	47.53	54.00	6.47	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	35.16	48.55	54.00	5.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	34.89	48.28	54.00	5.72	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.17	13.69	39.18	35.22	48.90	54.00	5.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.17	13.69	39.18	35.10	48.78	54.00	5.22	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	35.77	47.36	54.00	6.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	35.68	47.27	54.00	6.73	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	36.00	47.91	54.00	6.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	35.18	47.09	54.00	6.91	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	34.41	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	34.34	47.32	54.00	6.68	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	34.34	47.73	54.00	6.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	34.97	48.36	54.00	5.64	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.27	13.76	39.21	34.77	48.59	54.00	5.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.27	13.76	39.21	34.85	48.67	54.00	5.33	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.91	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.95	47.43	54.00	6.57	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.33	12.75	39.30	35.67	47.45	54.00	6.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.33	12.75	39.30	36.05	47.83	54.00	6.17	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.19	39.05	35.09	47.93	54.00	6.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.19	39.05	34.62	47.46	54.00	6.54	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.97	13.55	39.12	34.35	47.75	54.00	6.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.97	13.55	39.12	34.59	47.99	54.00	6.01	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.20	13.72	39.20	35.71	49.43	54.00	4.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.20	13.72	39.20	34.51	48.23	54.00	5.77	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.15	12.66	39.44	36.47	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.15	12.66	39.44	35.44	46.81	54.00	7.19	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.37	12.77	39.28	35.22	47.08	54.00	6.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.37	12.77	39.28	35.17	47.03	54.00	6.97	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.30	39.08	34.44	47.46	54.00	6.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.30	39.08	34.70	47.72	54.00	6.28	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.83	13.48	39.11	34.17	47.37	54.00	6.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.83	13.48	39.11	34.97	48.17	54.00	5.83	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.13	13.65	39.18	35.42	49.02	54.00	4.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.13	13.65	39.18	35.32	48.92	54.00	5.08	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.73	39.32	35.46	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.73	39.32	35.75	47.46	54.00	6.54	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.73	13.23	39.06	34.63	47.53	54.00	6.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.73	13.23	39.06	34.04	46.94	54.00	7.06	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	35.66	47.25	54.00	6.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.25	12.70	39.36	36.57	48.16	54.00	5.84	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	34.53	46.44	54.00	7.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.79	39.28	36.88	48.79	54.00	5.21	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	34.96	47.94	54.00	6.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.77	13.27	39.06	34.46	47.44	54.00	6.56	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	34.29	47.68	54.00	6.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.97	13.55	39.13	34.09	47.48	54.00	6.52	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.27	13.76	39.21	34.44	48.26	54.00	5.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.27	13.76	39.21	35.26	49.08	54.00	4.92	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.75	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.20	12.68	39.40	35.94	47.42	54.00	6.58	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.33	12.75	39.30	35.30	47.08	54.00	6.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.33	12.75	39.30	35.16	46.94	54.00	7.06	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.19	39.05	35.10	47.94	54.00	6.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.19	39.05	34.57	47.41	54.00	6.59	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.97	13.55	39.12	34.18	47.58	54.00	6.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.97	13.55	39.12	34.30	47.70	54.00	6.30	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.20	13.72	39.20	34.59	48.31	54.00	5.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.20	13.72	39.20	34.96	48.68	54.00	5.32	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.15	12.66	39.44	36.05	47.42	54.00	6.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.15	12.66	39.44	36.31	47.68	54.00	6.32	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.37	12.77	39.28	35.30	47.16	54.00	6.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.37	12.77	39.28	34.84	46.70	54.00	7.30	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.30	39.08	34.60	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.30	39.08	34.74	47.76	54.00	6.24	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.83	13.48	39.11	33.93	47.13	54.00	6.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.83	13.48	39.11	34.51	47.71	54.00	6.29	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.13	13.65	39.18	35.61	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.13	13.65	39.18	36.59	50.19	54.00	3.81	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.73	39.32	36.09	47.80	54.00	6.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.73	39.32	35.83	47.54	54.00	6.46	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.73	13.23	39.06	34.24	47.14	54.00	6.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.73	13.23	39.06	33.87	46.77	54.00	7.23	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.