



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

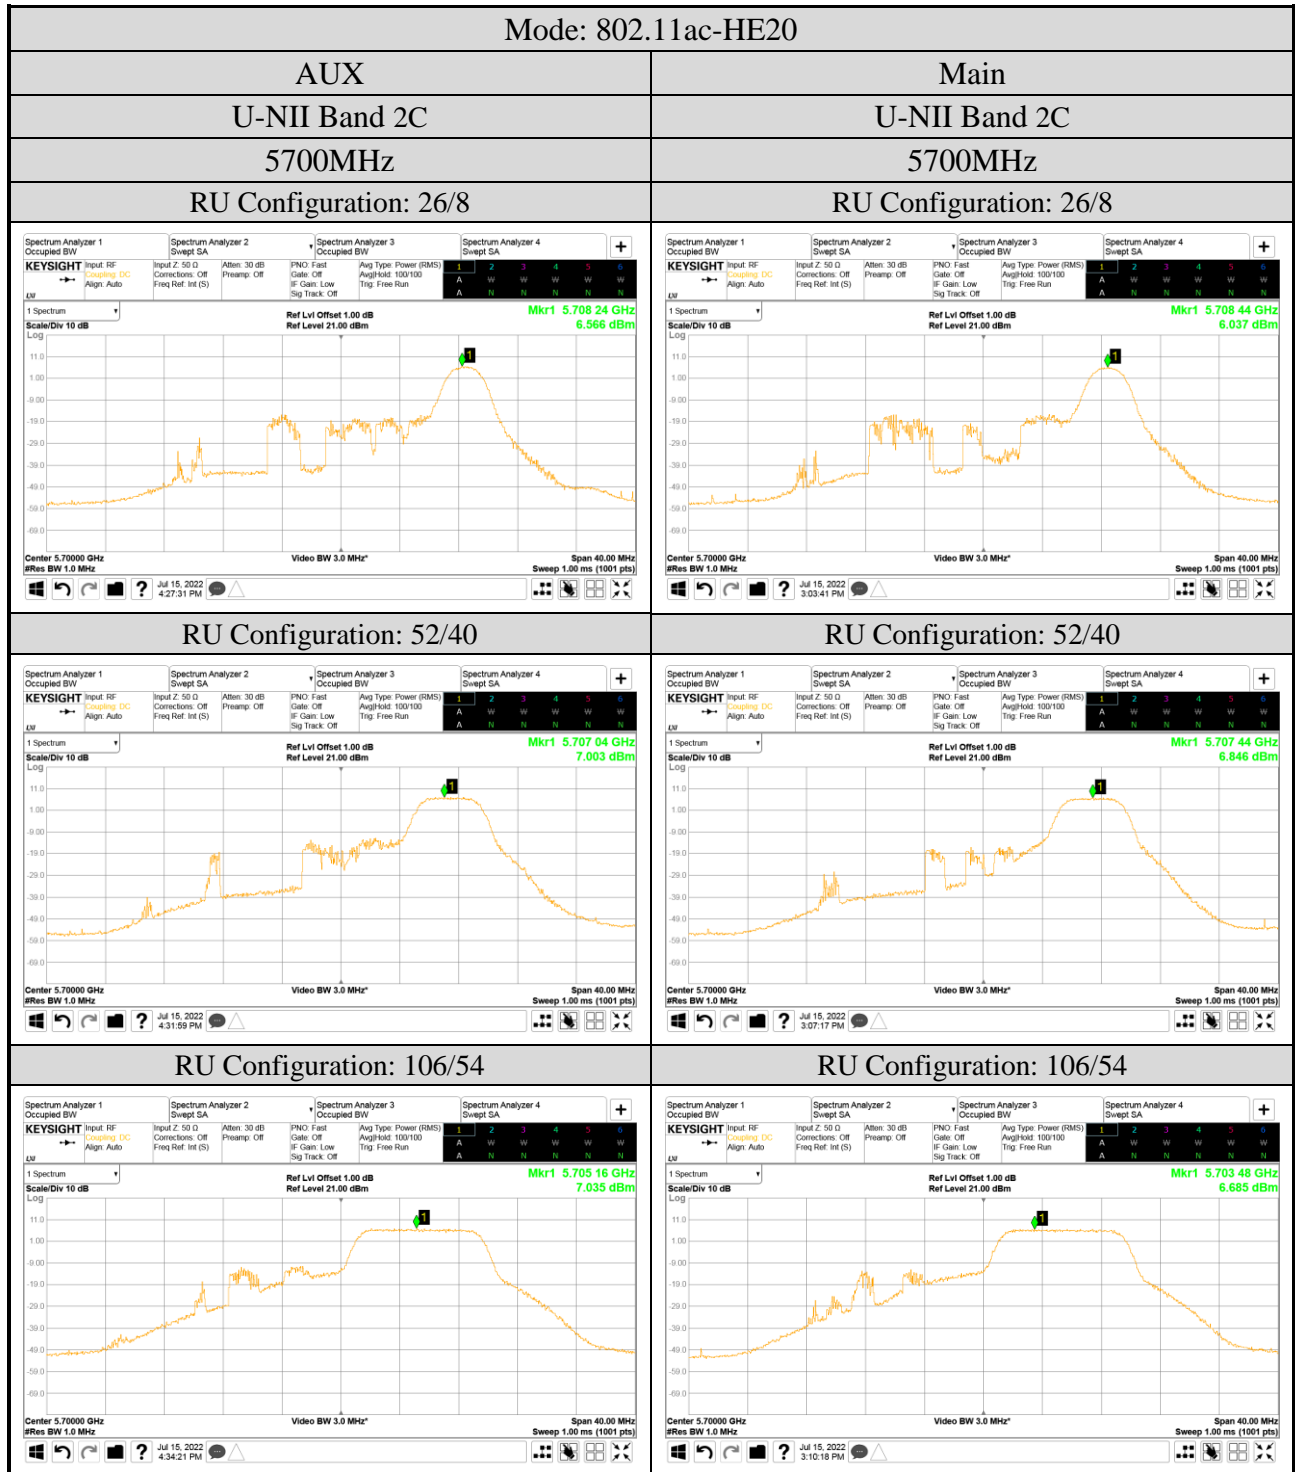


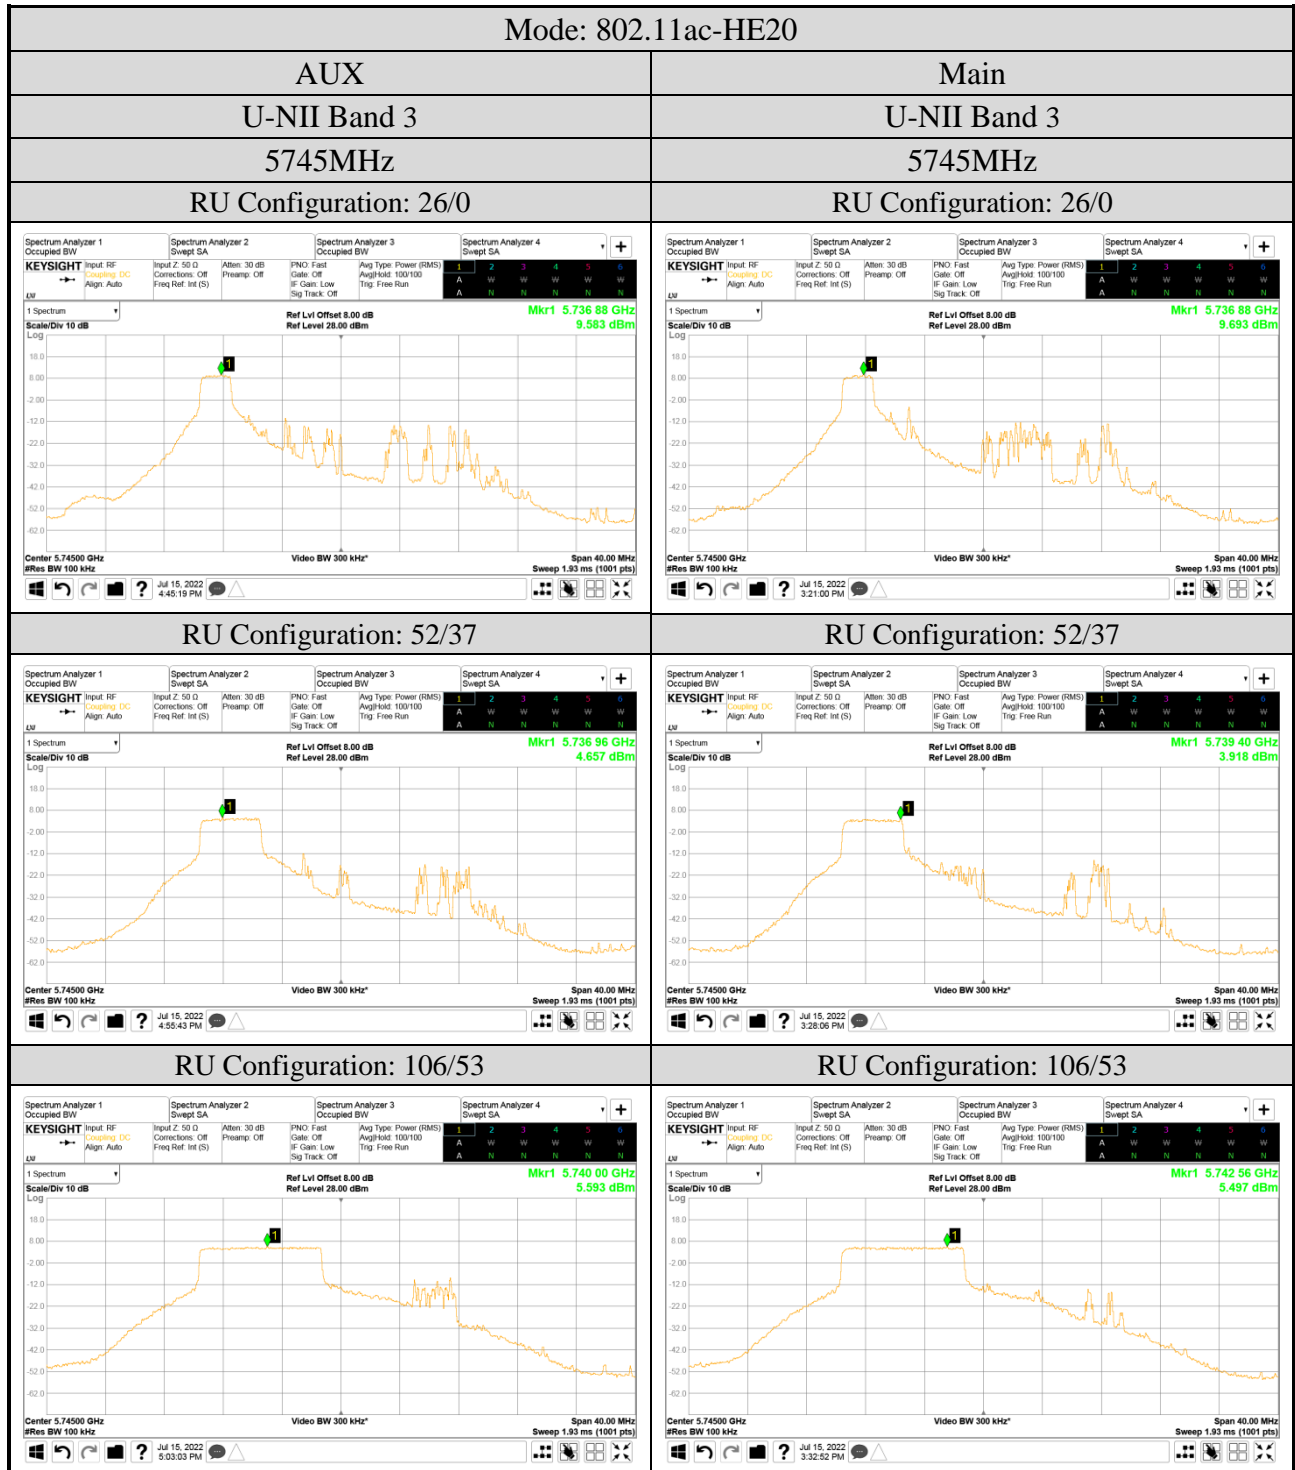



**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

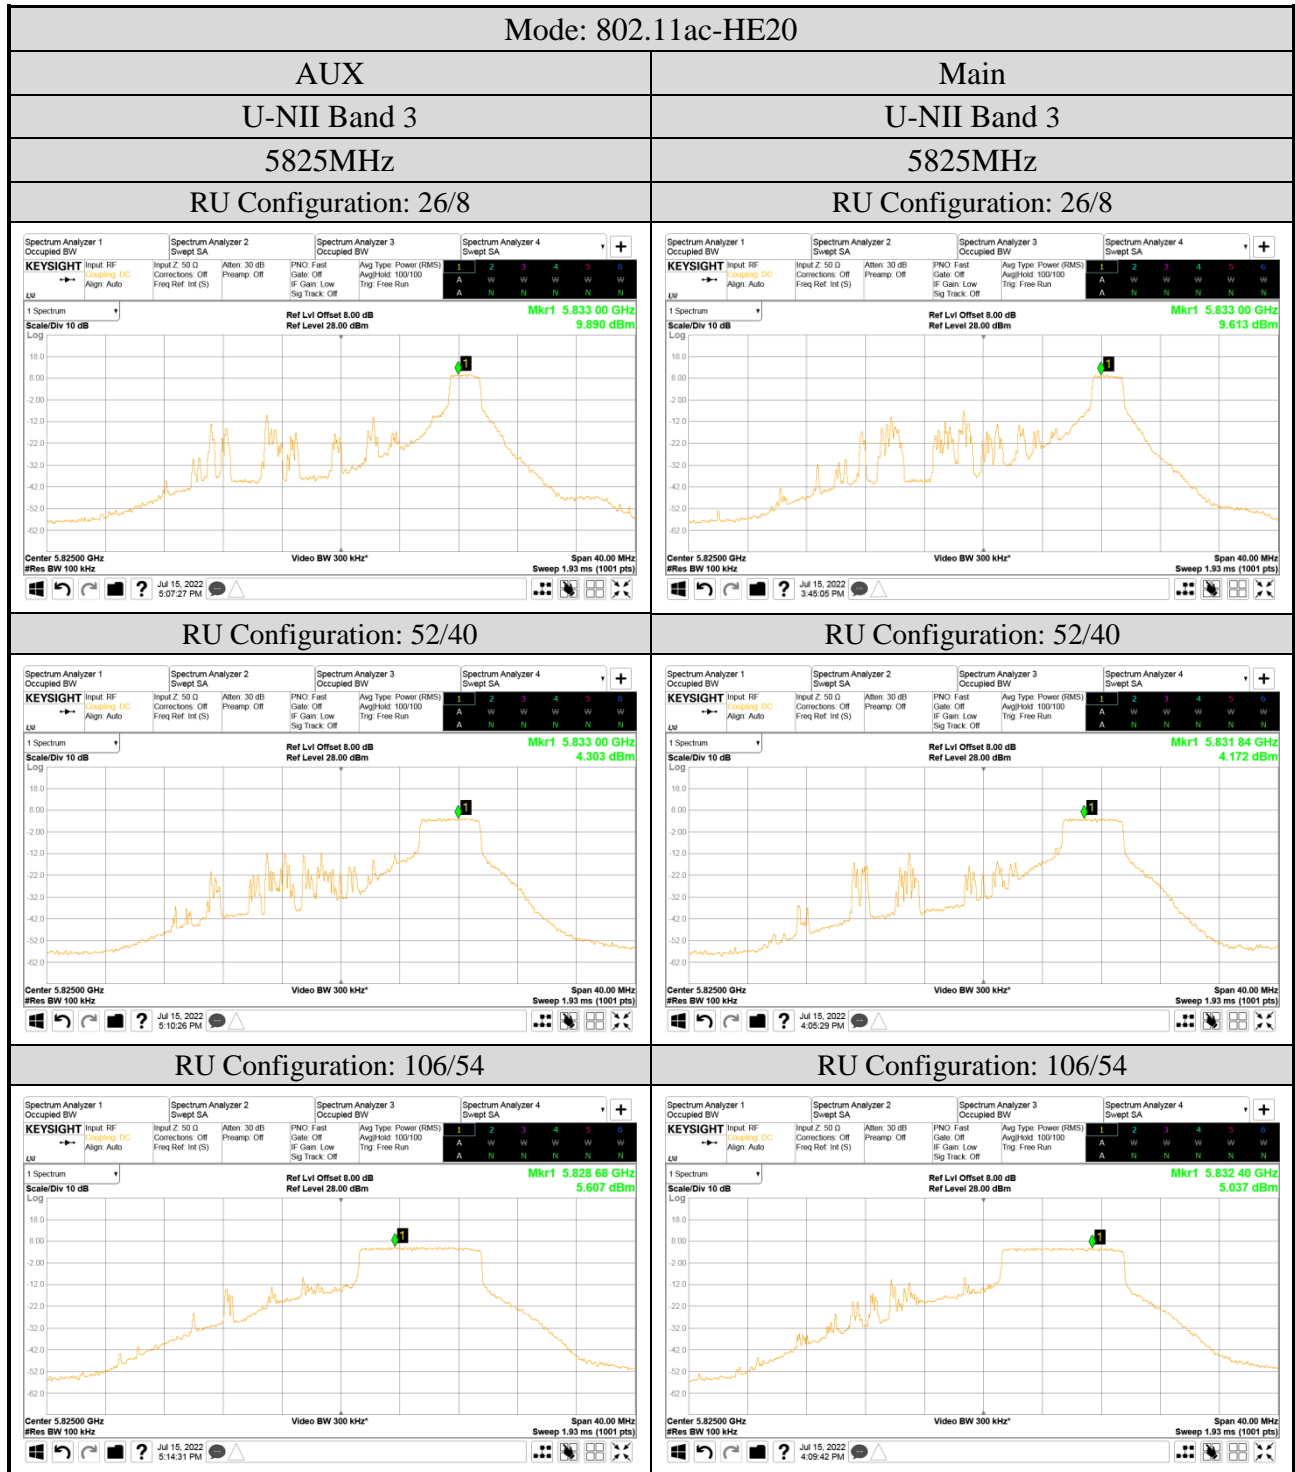


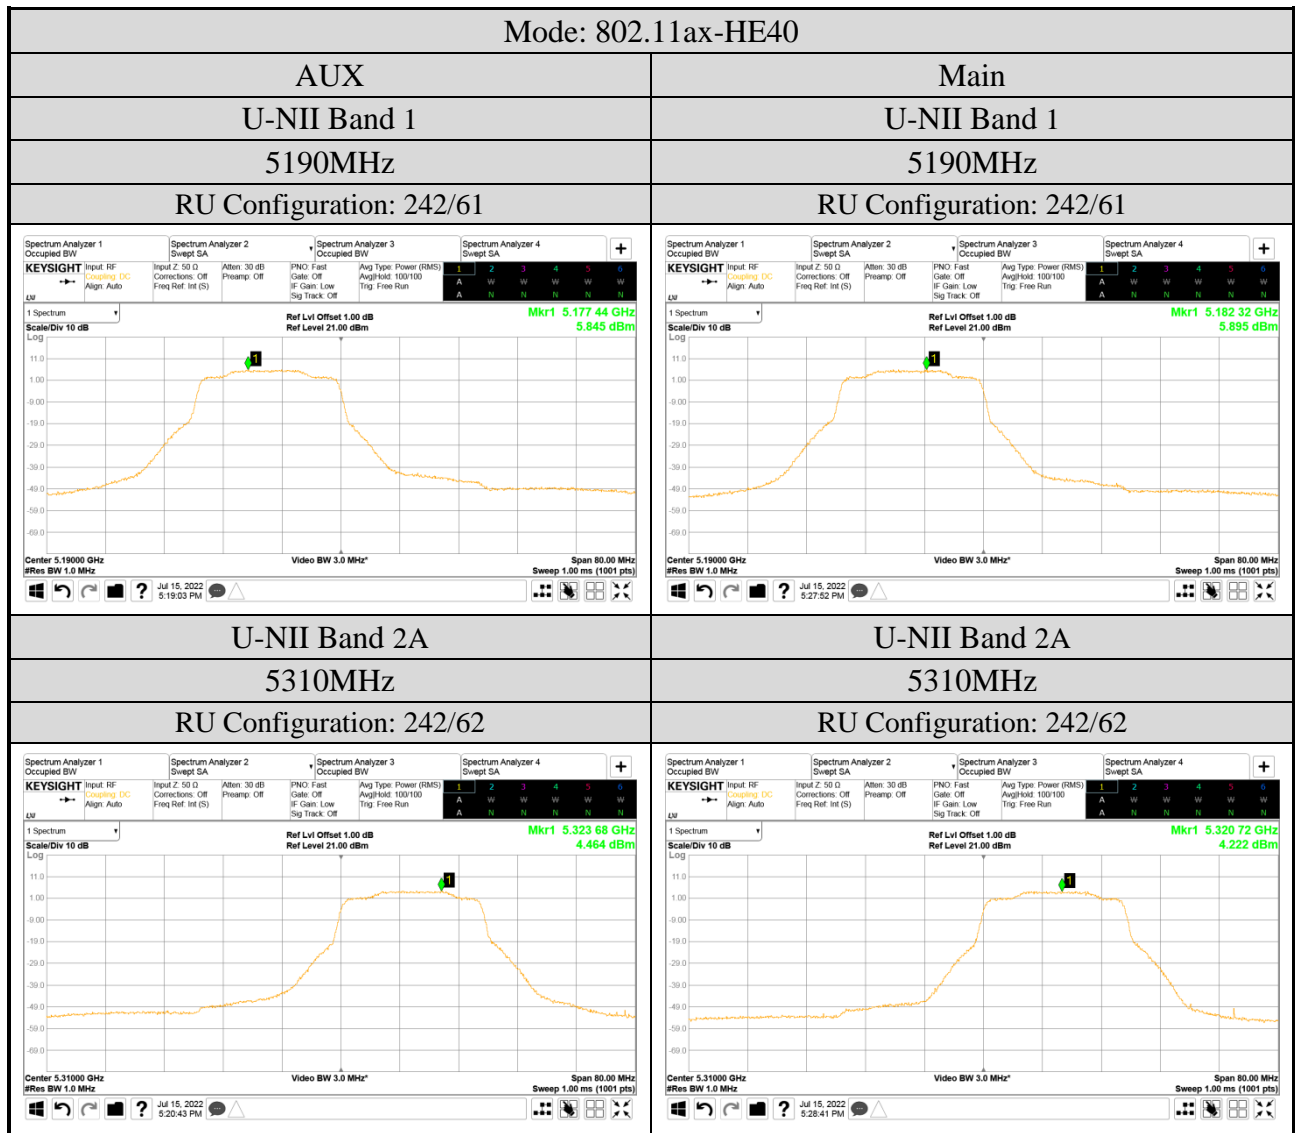

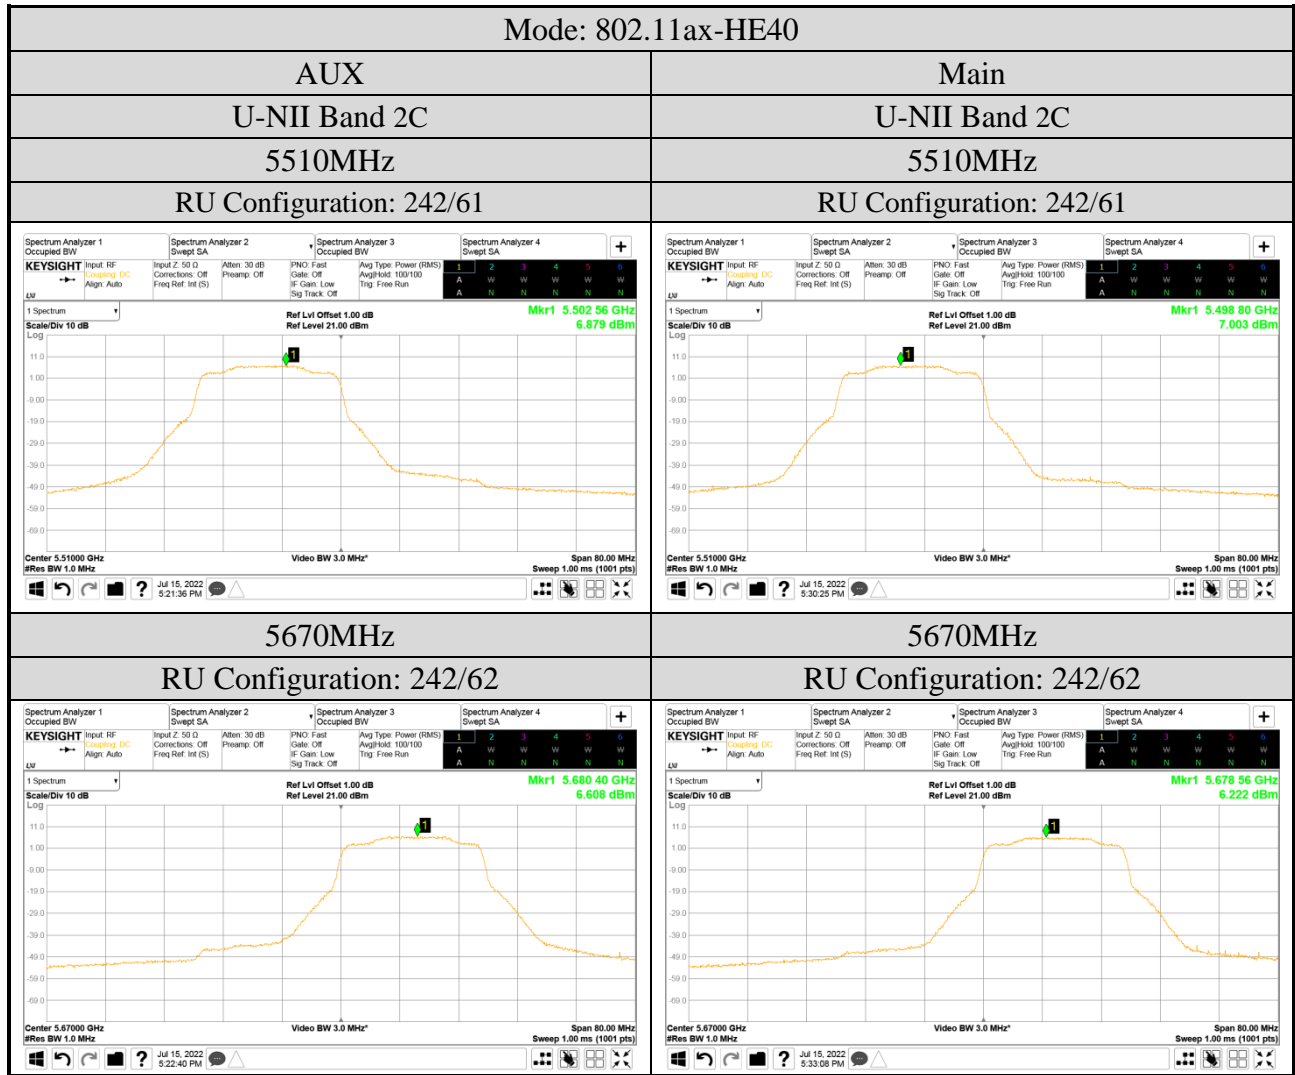


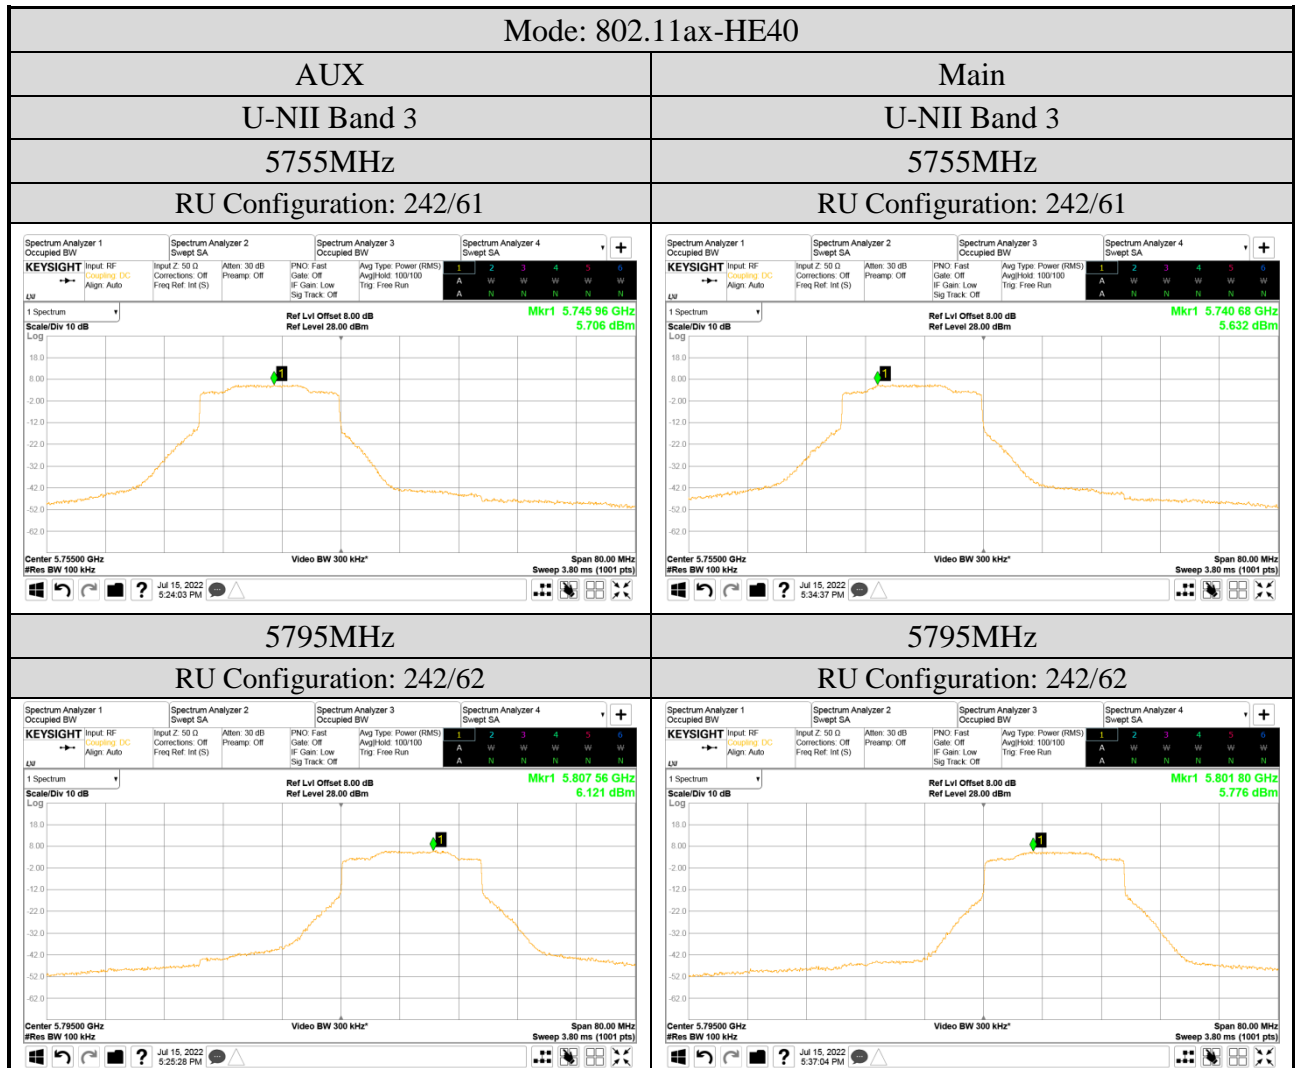


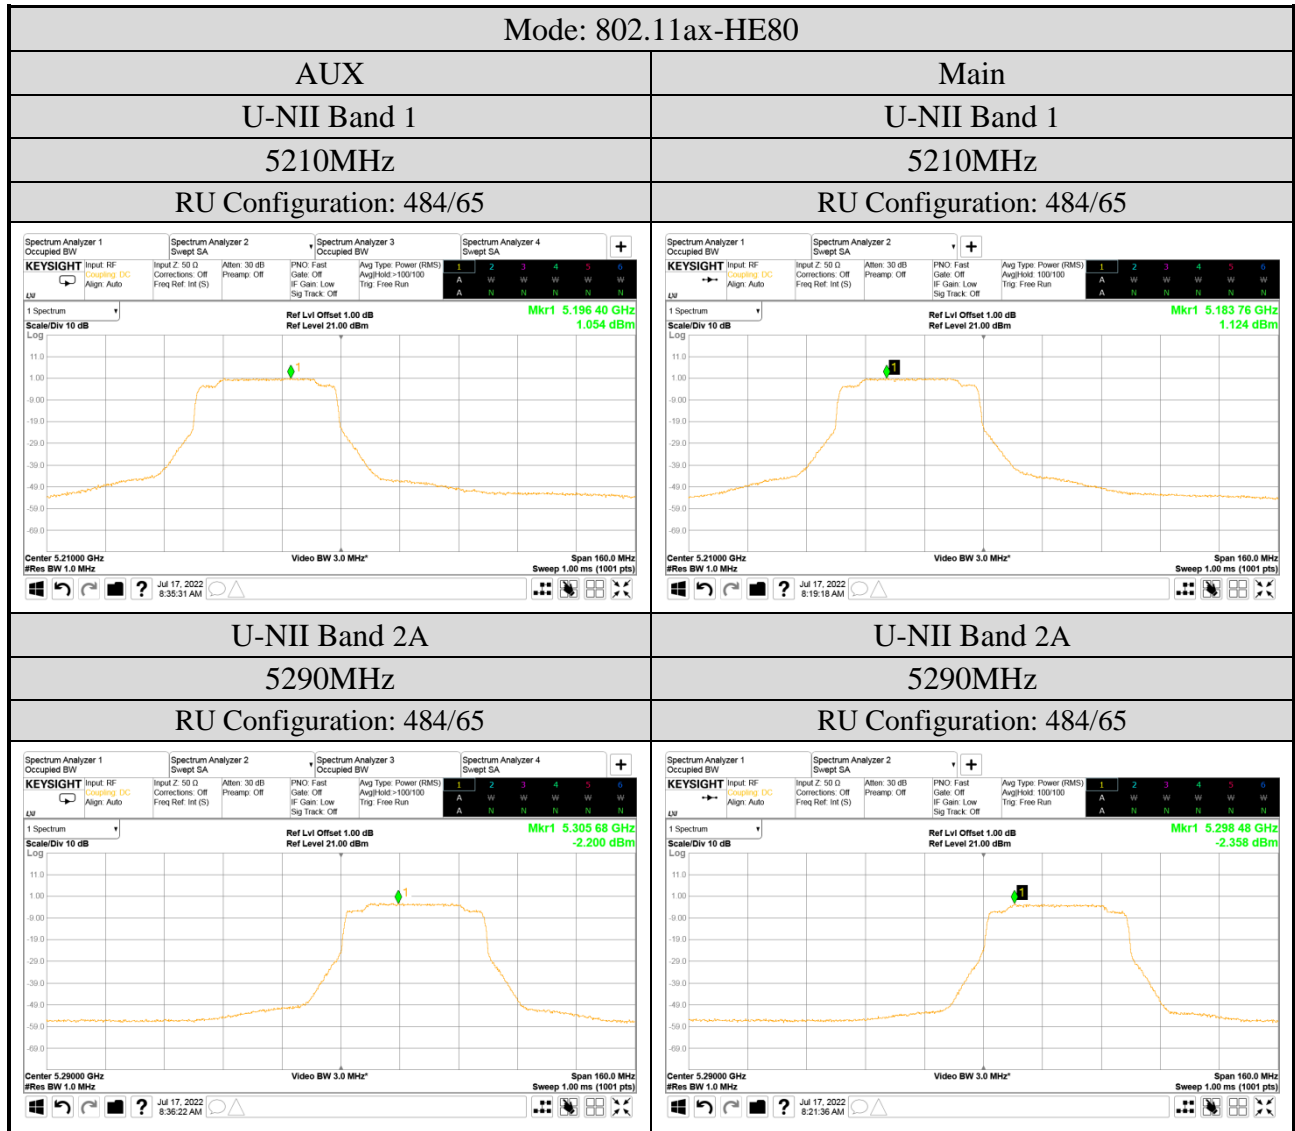


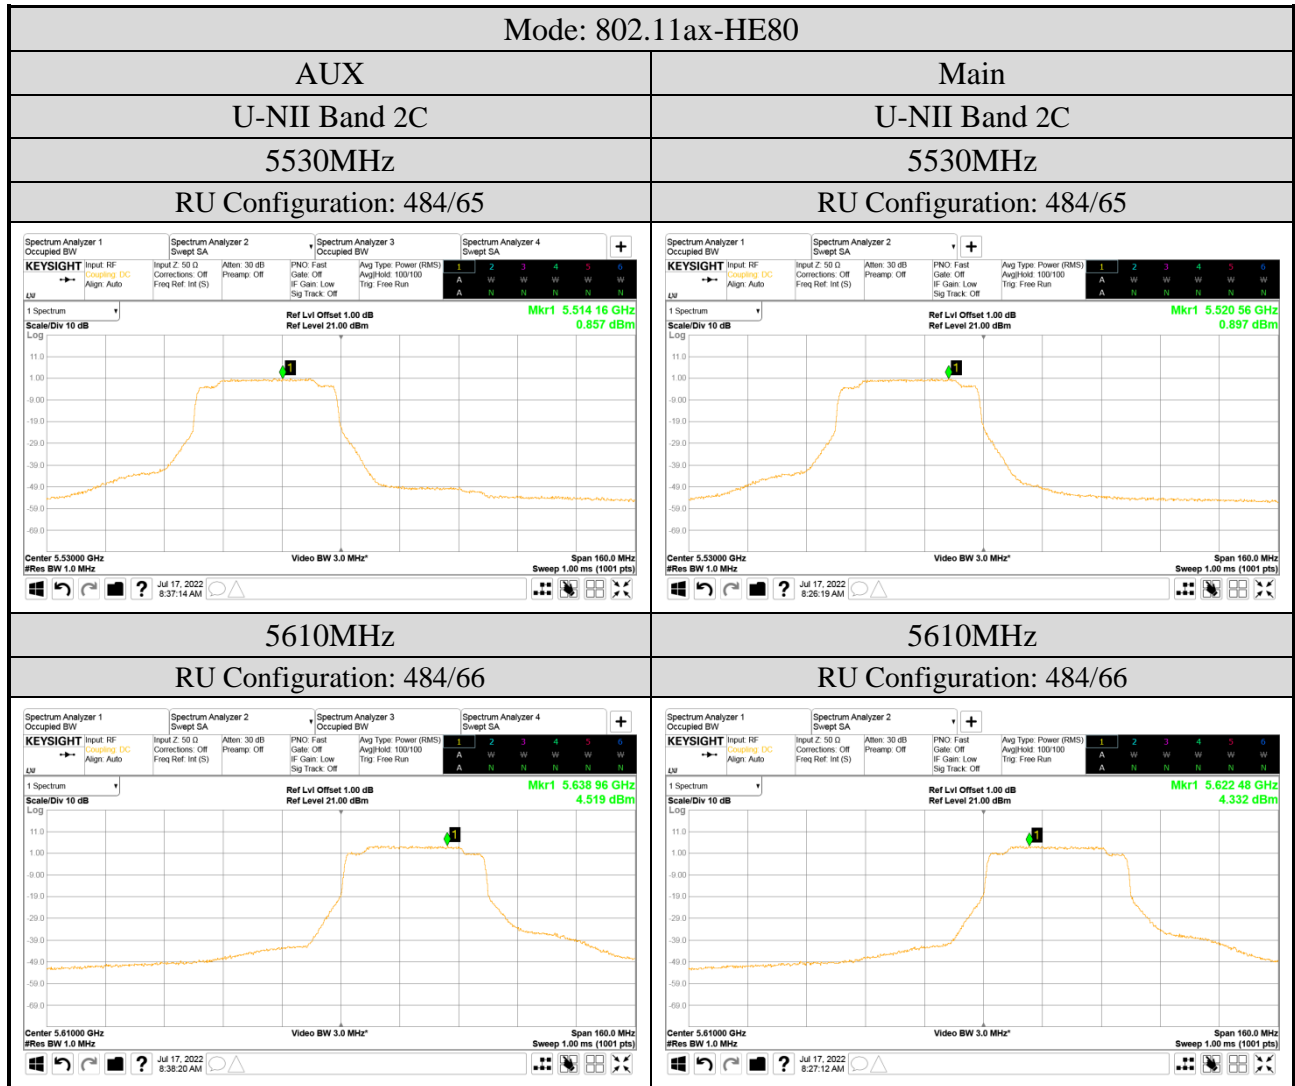



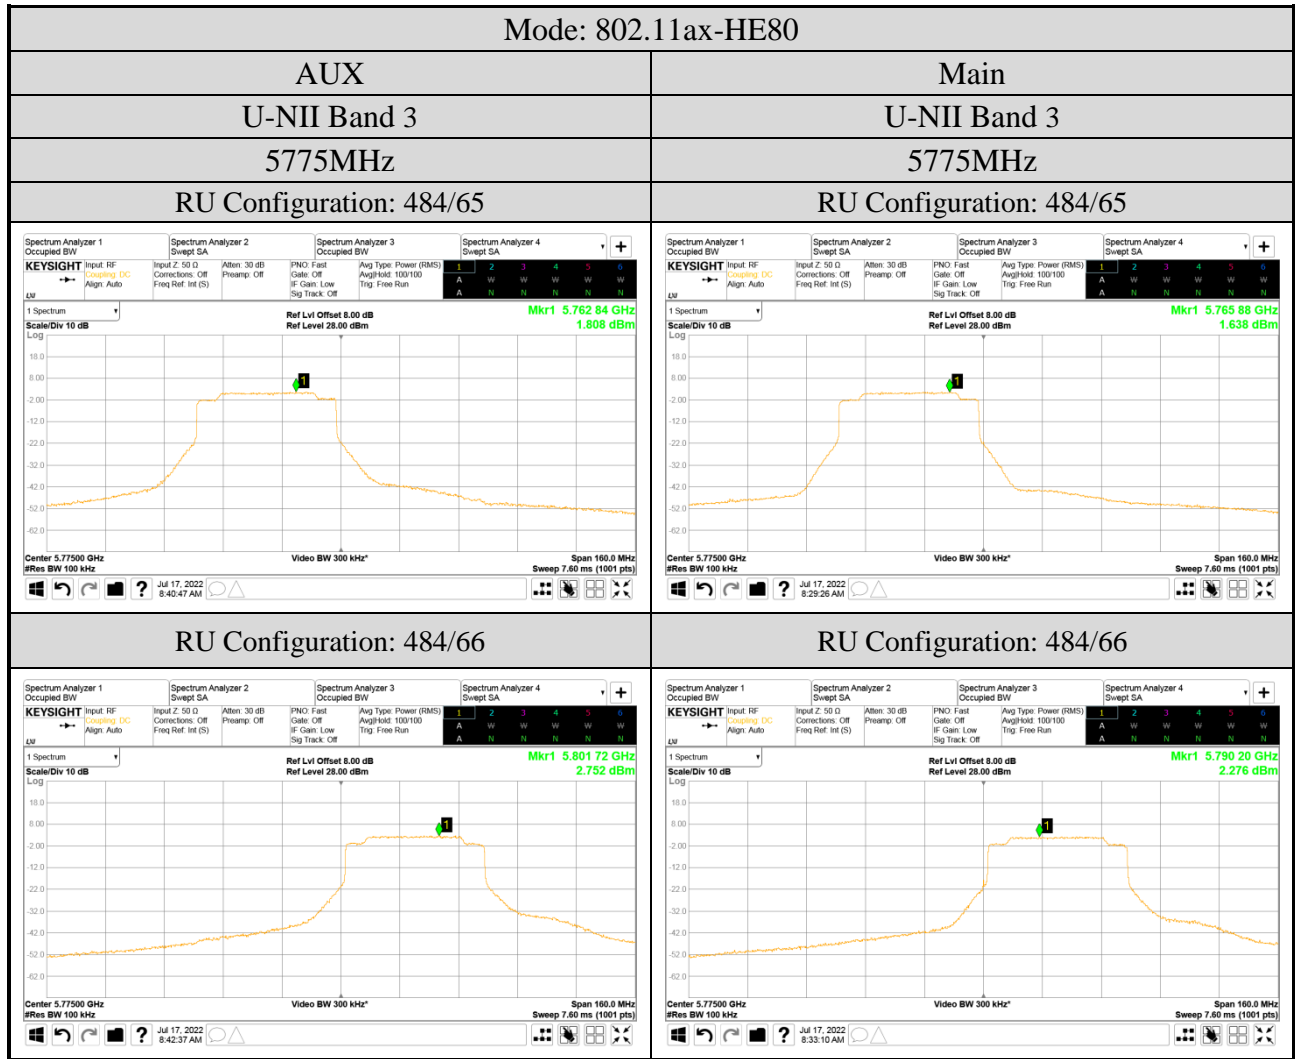

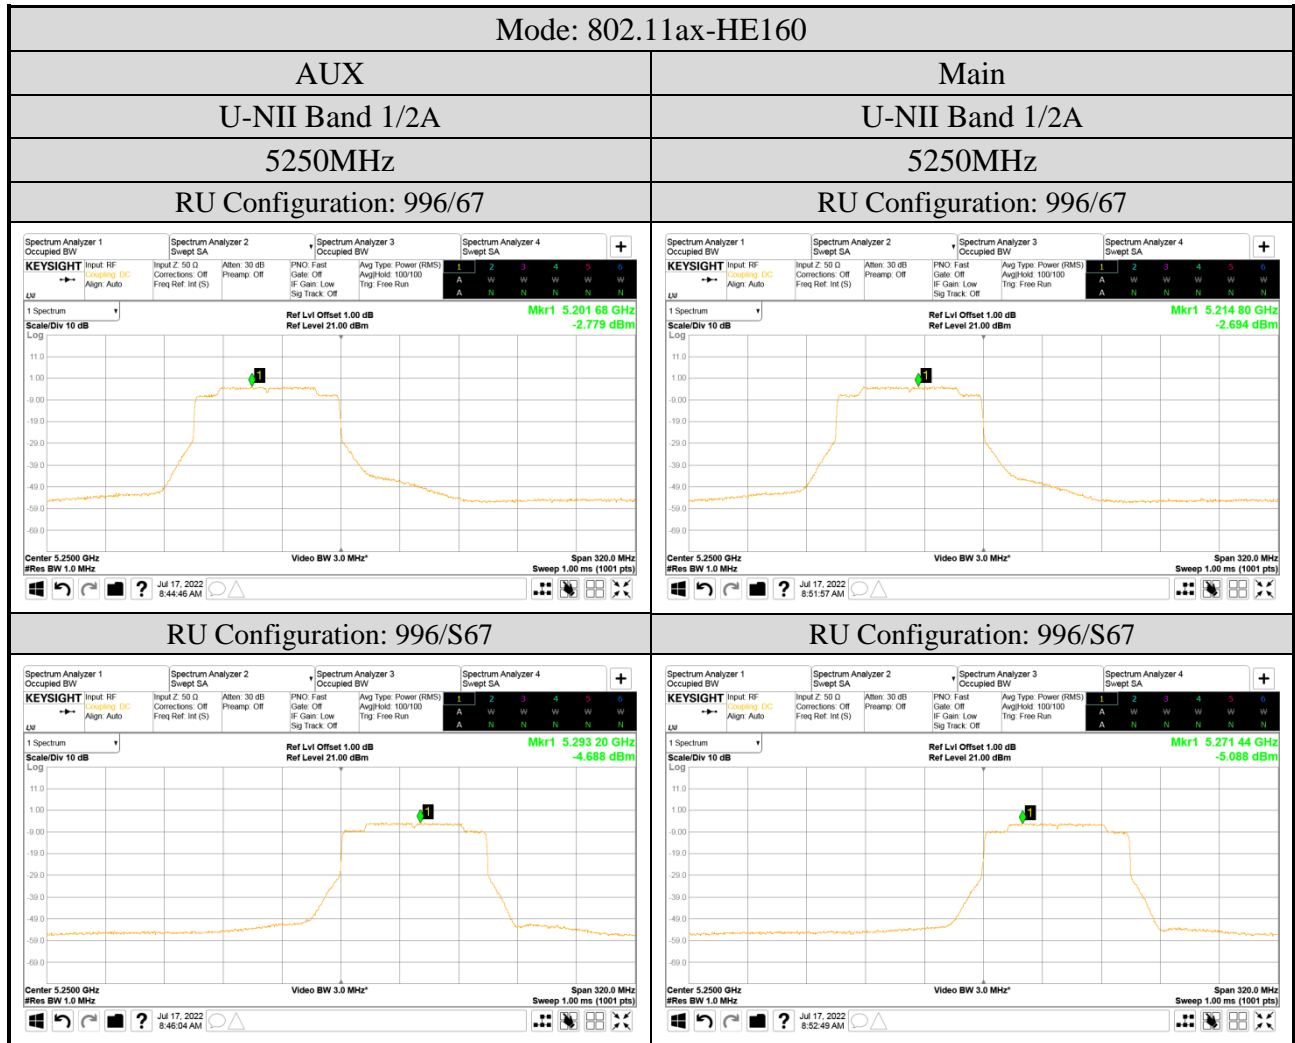

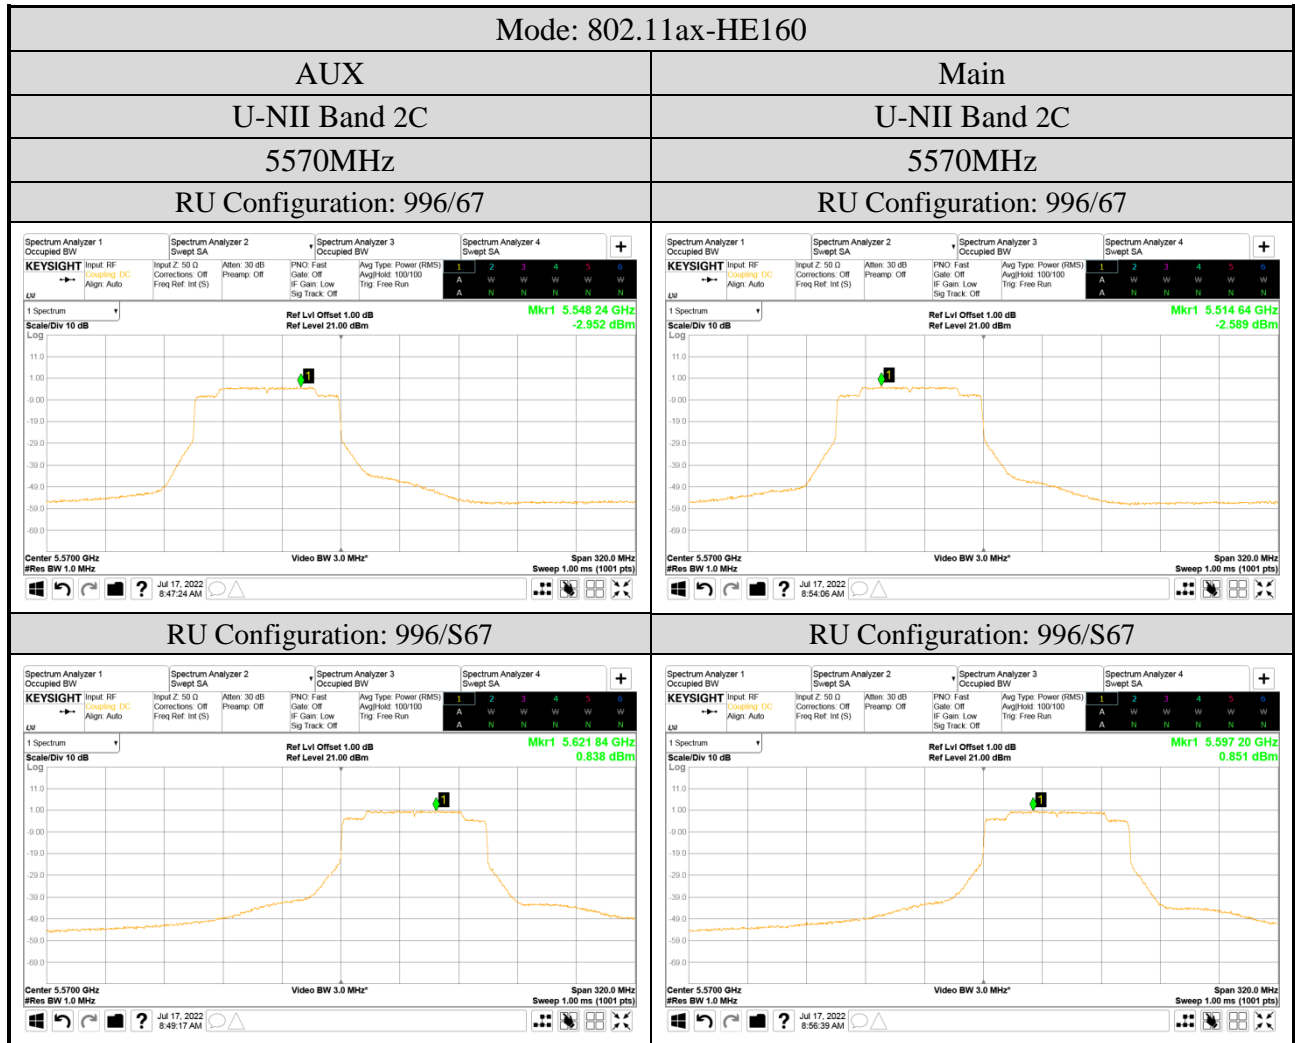

## A.5 FREQUENCY STABILITY

Test Date	2022/07/20	Temp./Hum.	25°C/50%
Cable Loss	---	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.5.1 Frequency stability Result

Temperature (°C)	Voltage (Vac)	Centre Frequency (MHz)	Measurement Value (MHz)	Frequency Stability (ppm)
25	120	5180	5179.988	-2.317
-30	102		5179.984	-3.089
	138		5179.991	-1.737
-20	102		5180.005	0.965
	138		5180.023	4.440
-10	102		5179.974	-5.019
	138		5179.999	-0.193
0	102		5180.022	4.247
	138		5179.975	-4.826
10	102		5179.987	-2.510
	138		5180.024	4.633
20	102		5180.009	1.737
	138		5180.026	5.019
30	102		5180.011	2.124
	138		5180.002	0.386
40	102		5179.986	-2.703
	138		5180.013	2.510
50	102		5180.016	3.089
	138		5179.976	-4.633