

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	90
A.2.3 Emissions in Non-restricted Frequency Bands:.....	93
A.3 DTS/OCCUPIED BANDWIDTH	94
A.3.1 DTS/Occupied Bandwidth Result.....	94
A.3.2 Measurement Plots	96
A.4 MAXIMUM PEAK OUTPUT POWER	118
A.4.1 Peak Output Power	118
A.4.2 Average Output Power (Reporting only).....	122
A.4.3 Measurement Plots	125
A.5 EMISSION LIMITATIONS	127
A.6 POWER SPECTRAL DENSITY	153
A.6.1 Power Spectral Density Result	153
A.6.2 Measurement Plots	156

A.1 CONDUCTED EMISSION

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

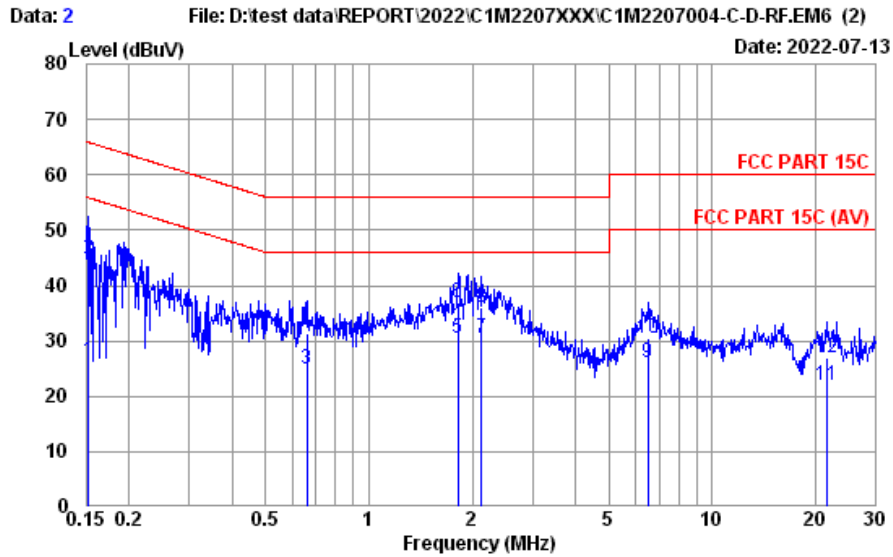


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 17ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.34	0.03	9.85	6.07	26.29	55.87	29.58	Average
2	0.152	10.34	0.03	9.85	24.57	44.79	65.87	21.08	QP
3	0.661	10.33	0.04	9.85	4.81	25.03	46.00	20.97	Average
4	0.661	10.33	0.04	9.85	11.08	31.30	56.00	24.70	QP
5	1.819	10.36	0.06	9.86	10.24	30.52	46.00	15.48	Average
6	1.819	10.36	0.06	9.86	16.55	36.83	56.00	19.17	QP
7	2.133	10.36	0.06	9.86	10.10	30.38	46.00	15.62	Average
8	2.133	10.36	0.06	9.86	15.76	36.04	56.00	19.96	QP
9	6.488	10.52	0.11	9.87	5.60	26.10	50.00	23.90	Average
10	6.488	10.52	0.11	9.87	10.01	30.51	60.00	29.49	QP
11	21.486	11.11	0.20	9.95	0.81	22.07	50.00	27.93	Average
12	21.486	11.11	0.20	9.95	5.62	26.88	60.00	33.12	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

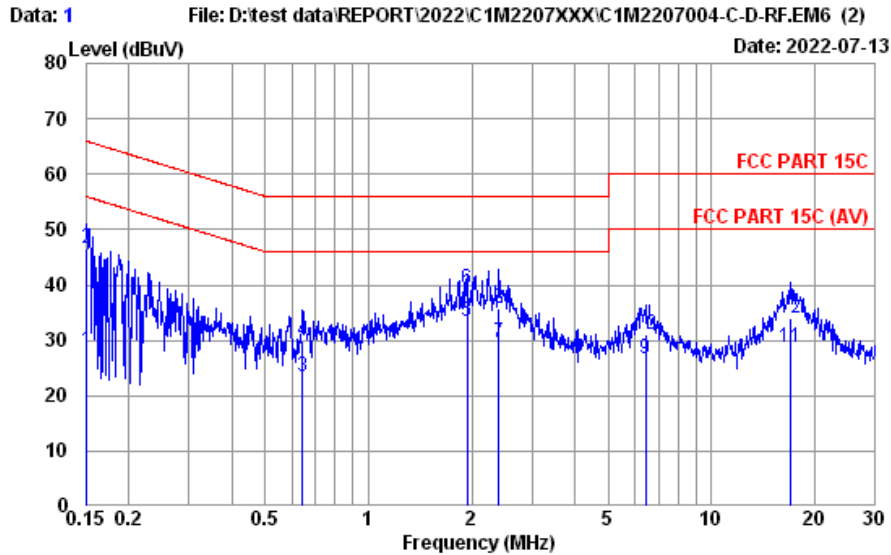

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: LIIE
Environment	: 26°C / 47%	Engineer	: Roy Hung
EUT Model	: 17ZB90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.22	0.03	9.85	7.89	27.99	55.96	27.97	Average
2	0.151	10.22	0.03	9.85	26.57	46.67	65.96	19.29	QP
3	0.641	10.23	0.04	9.85	3.46	23.58	46.00	22.42	Average
4	0.641	10.23	0.04	9.85	9.74	29.86	56.00	26.14	QP
5	1.939	10.25	0.06	9.86	13.11	33.28	46.00	12.72	Average
6	1.939	10.25	0.06	9.86	19.22	39.39	56.00	16.61	QP
7	2.396	10.26	0.07	9.86	9.29	29.48	46.00	16.52	Average
8	2.396	10.26	0.07	9.86	15.66	35.85	56.00	20.15	QP
9	6.420	10.35	0.11	9.87	6.21	26.54	50.00	23.46	Average
10	6.420	10.35	0.11	9.87	10.61	30.94	60.00	29.06	QP
11	16.928	10.59	0.18	9.92	8.09	28.78	50.00	21.22	Average
12	16.928	10.59	0.18	9.92	13.24	33.93	60.00	26.07	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/07/11 ~ 13	Temp./Hum.	23 ~ 24°C/58 ~ 66%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.65	1.41	26.49	28.30	26.87	40.00	13.13	Peak
111.480	17.39	2.75	26.21	33.48	27.41	43.50	16.09	Peak
215.270	16.12	3.88	25.76	41.88	36.12	43.50	7.38	Peak
540.220	23.61	6.90	27.24	30.82	34.09	46.00	11.91	Peak
870.020	26.19	8.60	27.06	28.85	36.58	46.00	9.42	Peak
997.090	27.10	9.27	26.66	29.46	39.17	54.00	14.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	40.27	37.79	40.00	2.21	Peak
123.120	17.80	2.89	26.14	36.20	30.75	43.50	12.75	Peak
194.900	15.07	3.66	25.80	43.04	35.97	43.50	7.53	Peak
425.760	21.86	6.15	26.62	32.54	33.93	46.00	12.07	Peak
540.220	23.61	6.90	27.24	31.58	34.85	46.00	11.15	Peak
983.510	26.99	9.20	26.69	28.36	37.86	54.00	16.14	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.65	1.41	26.49	28.09	26.66	40.00	13.34	Peak
110.510	17.33	2.74	26.21	33.13	26.99	43.50	16.51	Peak
220.120	16.41	3.94	25.74	41.40	36.01	46.00	9.99	Peak
717.730	24.99	7.74	27.41	28.80	34.12	46.00	11.88	Peak
830.250	26.06	8.38	27.18	29.16	36.42	46.00	9.58	Peak
976.720	26.94	9.17	26.72	28.72	38.11	54.00	15.89	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	40.75	38.27	40.00	1.73	Peak
192.960	15.06	3.64	25.81	42.00	34.89	43.50	8.61	Peak
323.910	19.70	5.02	25.82	32.51	31.41	46.00	14.59	Peak
540.220	23.61	6.90	27.24	31.07	34.34	46.00	11.66	Peak
836.070	26.08	8.41	27.18	28.58	35.89	46.00	10.11	Peak
967.020	26.85	9.11	26.75	29.21	38.42	54.00	15.58	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

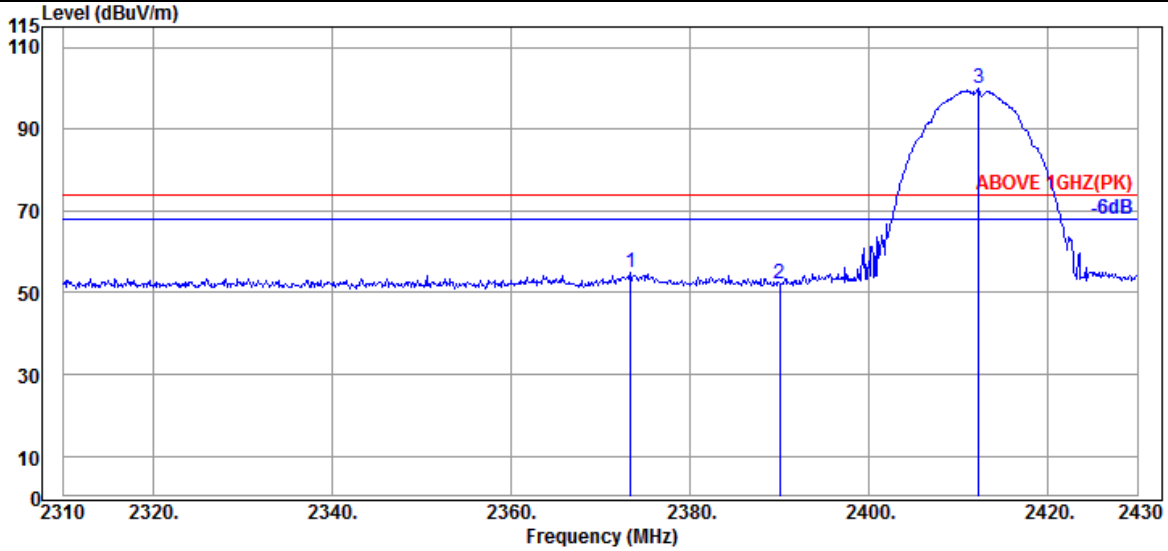

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.360	28.33	5.70	39.93	60.70	54.80	74.00	19.20	Peak
2390.040	28.21	5.72	39.93	58.16	52.16	74.00	21.84	Peak
@ 2412.240	28.19	5.76	39.93	106.10	100.12	---	---	Peak

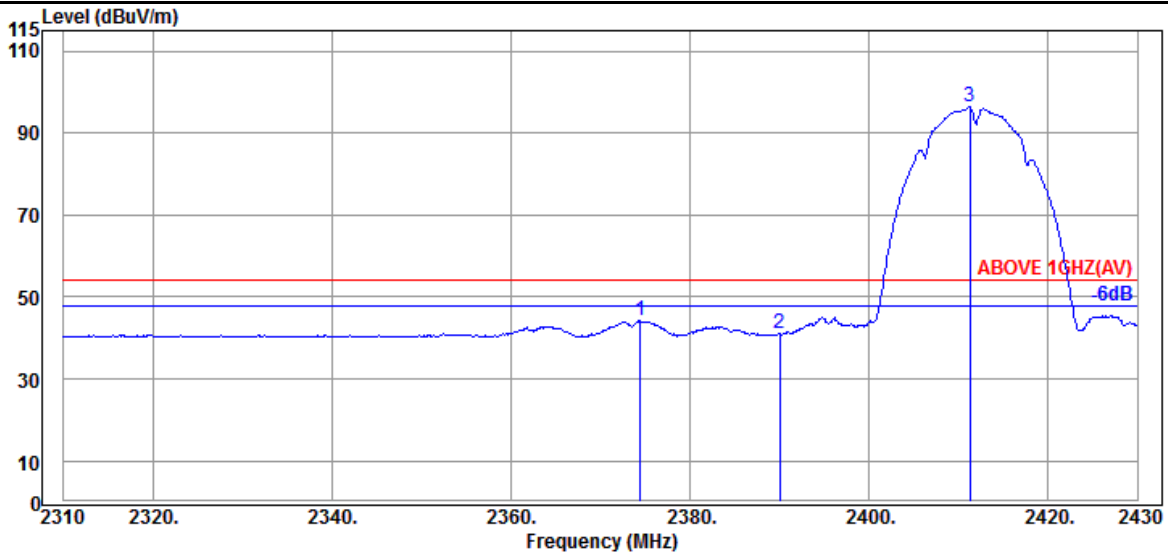


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	28.33	5.70	39.93	50.05	44.15	54.00	9.85	Average
2390.040	28.21	5.72	39.93	46.98	40.98	54.00	13.02	Average
@ 2411.280	28.19	5.76	39.93	102.31	96.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

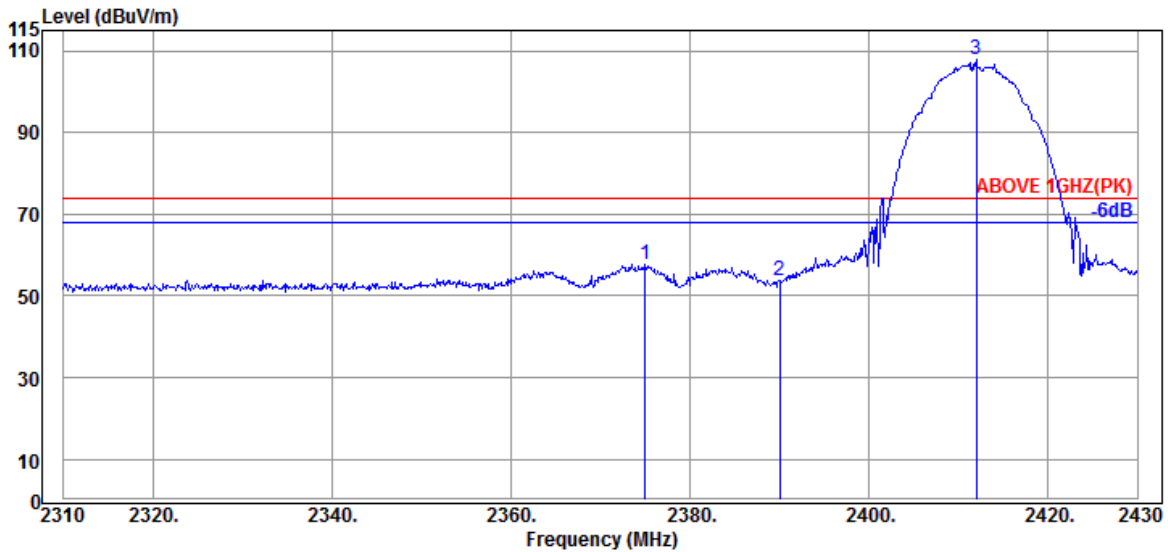

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.040	28.33	5.70	39.93	63.66	57.76	74.00	16.24	Peak
2390.040	28.21	5.72	39.93	59.86	53.86	74.00	20.14	Peak
@ 2412.000	28.19	5.76	39.93	113.88	107.90	---	---	Peak

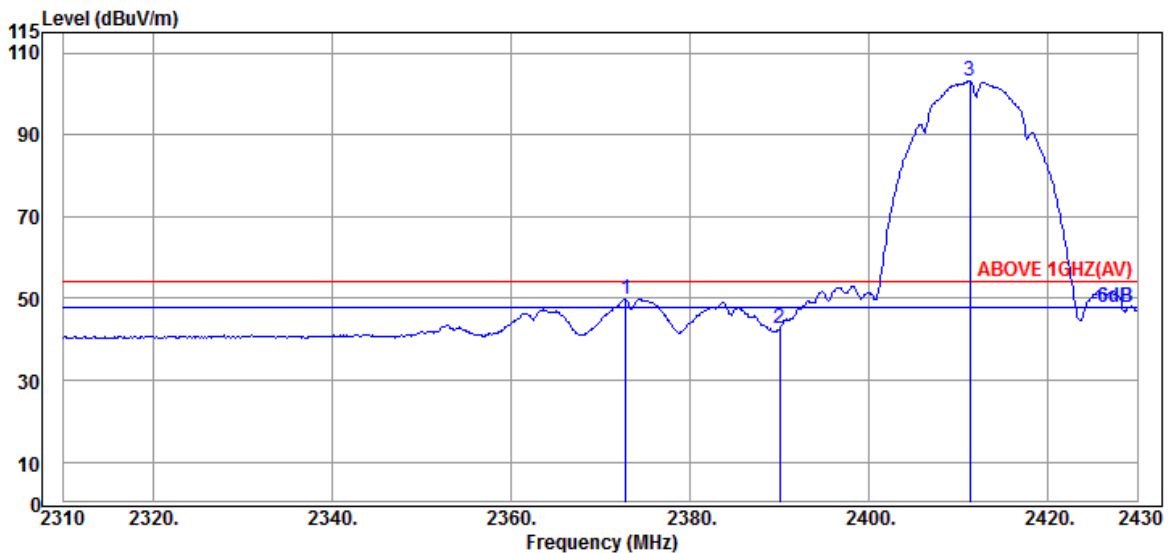


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.880	28.33	5.70	39.93	55.74	49.84	54.00	4.16	Average
2390.040	28.21	5.72	39.93	48.72	42.72	54.00	11.28	Average
@ 2411.280	28.19	5.76	39.93	109.22	103.24	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

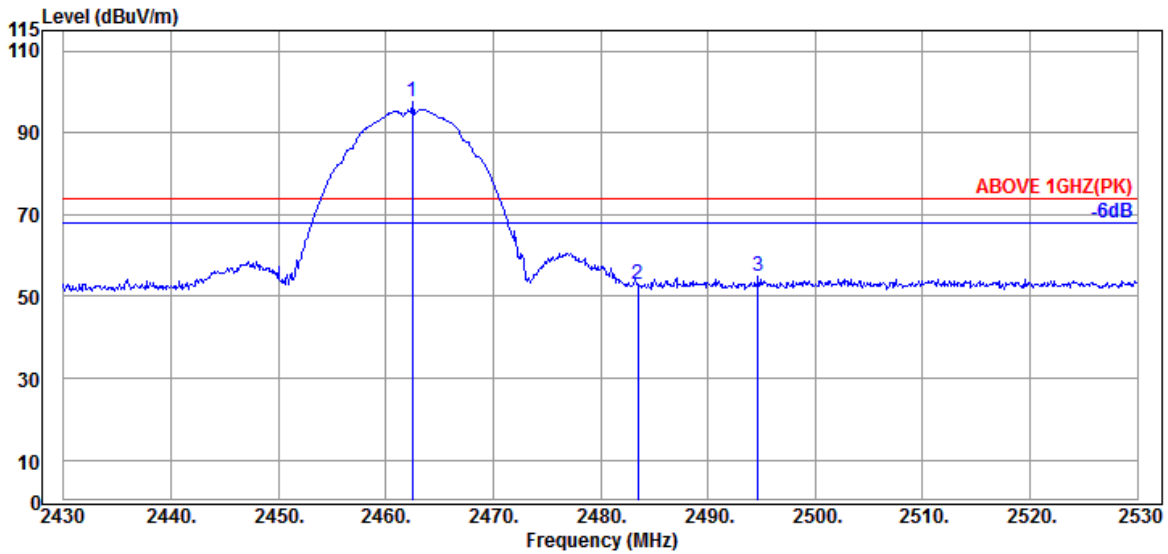

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.43	5.84	39.92	103.13	97.48	---	---	Peak
2483.500	28.47	5.87	39.92	58.49	52.91	74.00	21.09	Peak
2494.700	28.49	5.88	39.92	60.54	54.99	74.00	19.01	Peak

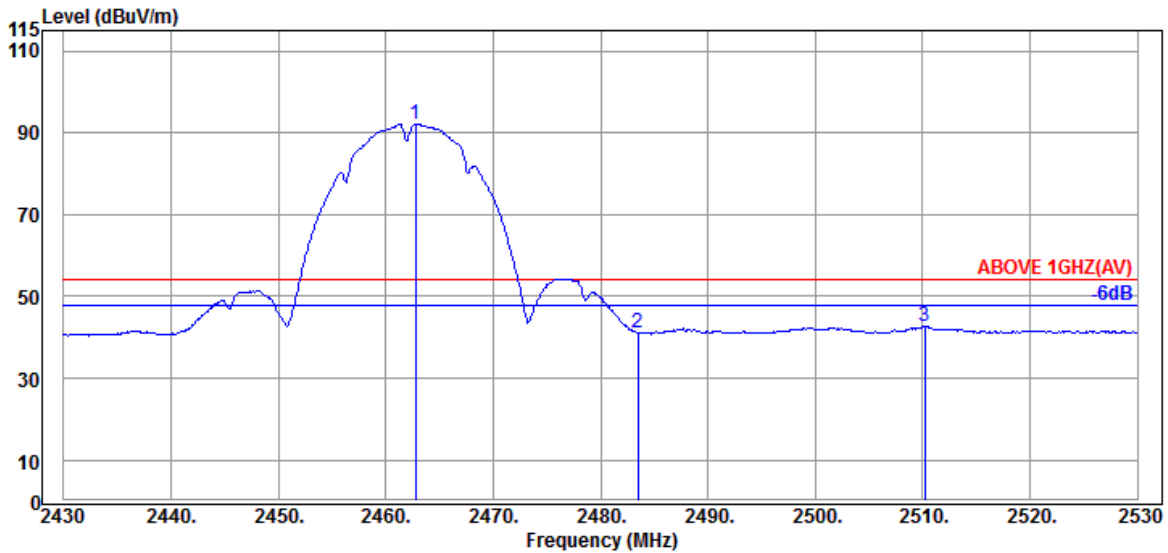


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.43	5.84	39.92	97.85	92.20	---	---	Average
2483.500	28.47	5.87	39.92	46.61	41.03	54.00	12.97	Average
2510.200	28.54	5.91	39.92	48.11	42.64	54.00	11.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

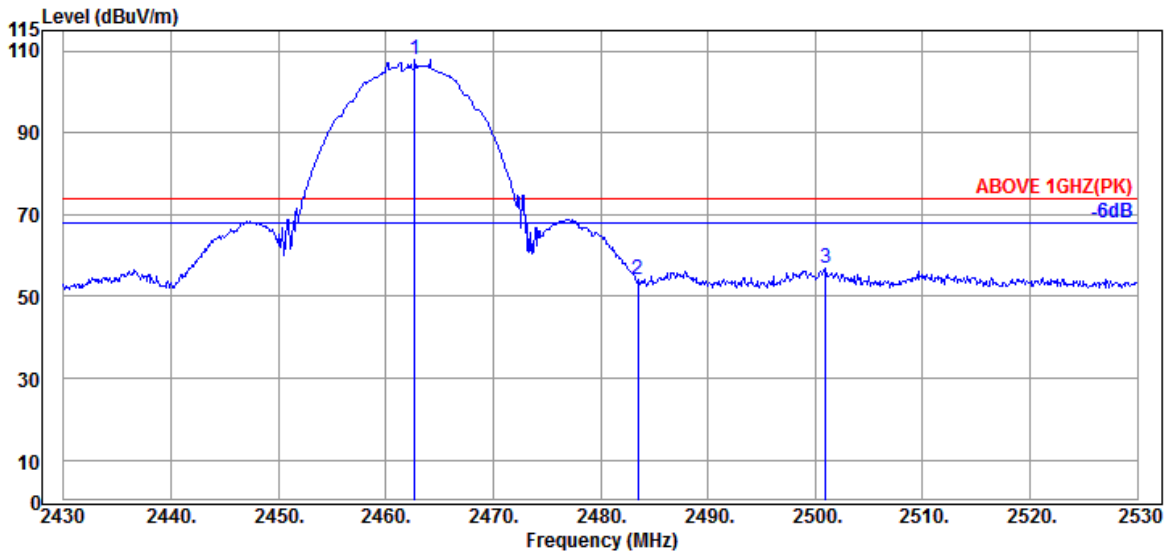

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	28.43	5.84	39.92	113.73	108.08	---	---	Peak
2483.500	28.47	5.87	39.92	59.74	54.16	74.00	19.84	Peak
2501.000	28.50	5.89	39.92	62.48	56.95	74.00	17.05	Peak

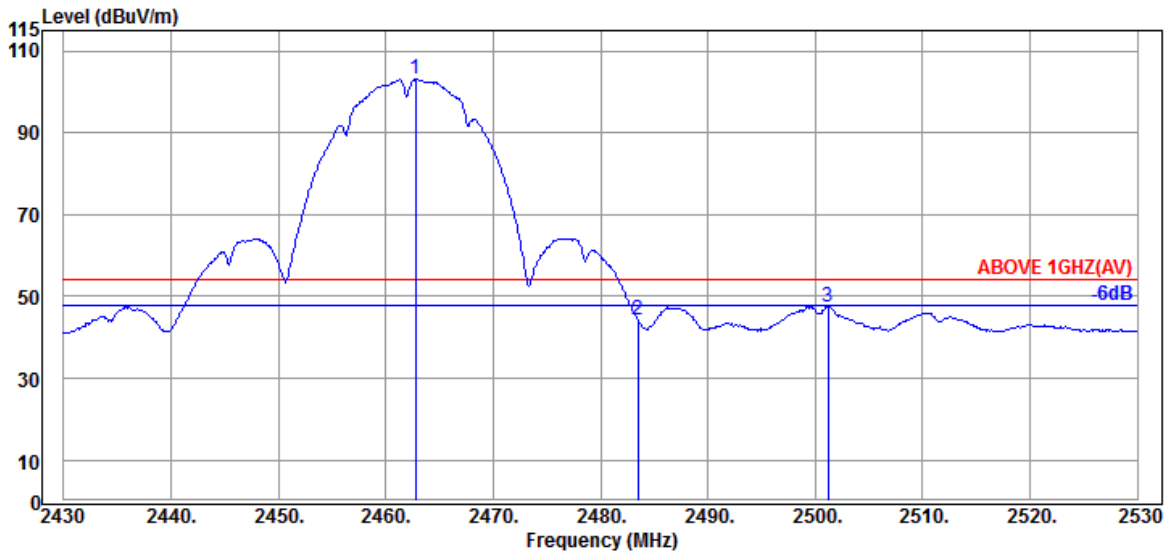


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.43	5.84	39.92	108.78	103.13	---	---	Average
2483.500	28.47	5.87	39.92	49.77	44.19	54.00	9.81	Average
2501.200	28.50	5.89	39.92	53.07	47.54	54.00	6.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

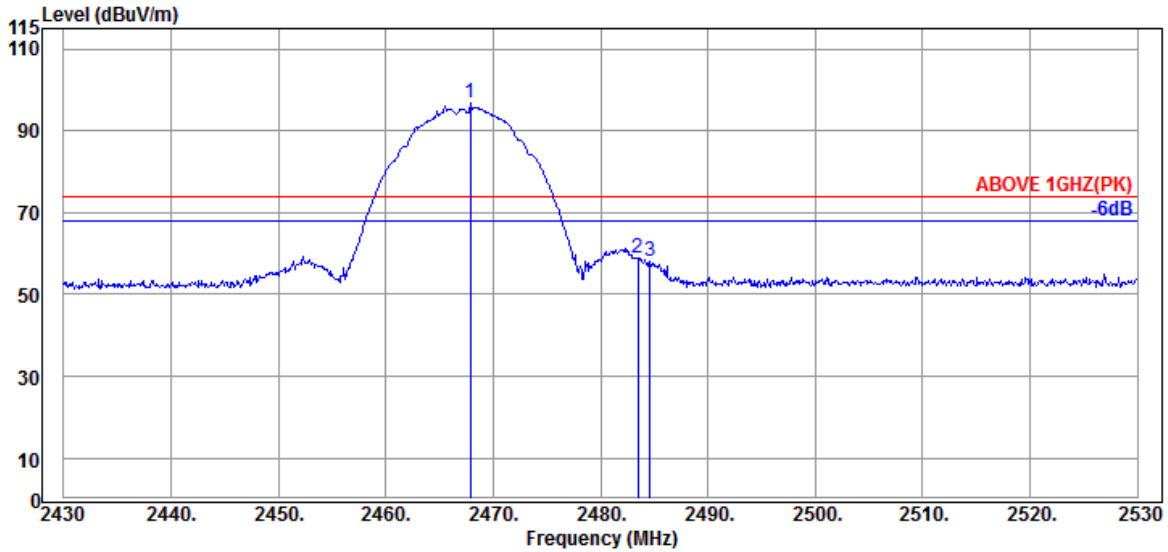

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.44	5.85	39.92	102.55	96.92	---	---	Peak
2483.500	28.47	5.87	39.92	64.44	58.86	74.00	15.14	Peak
2484.600	28.47	5.87	39.92	63.67	58.09	74.00	15.91	Peak

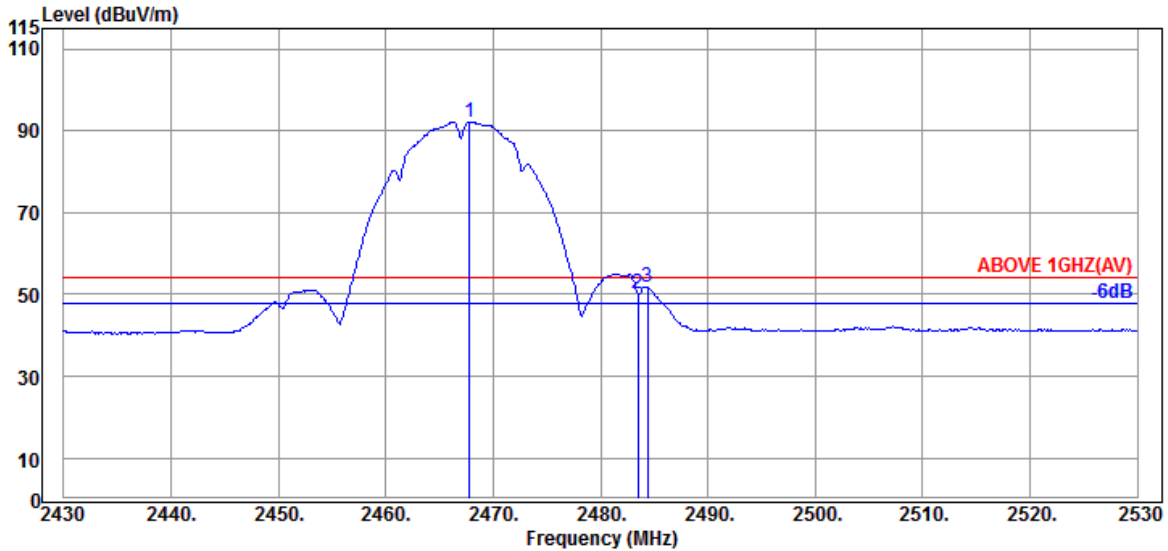


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.800	28.44	5.85	39.92	97.90	92.27	---	---	Average
2483.500	28.47	5.87	39.92	55.89	50.31	54.00	3.69	Average
2484.400	28.47	5.87	39.92	57.35	51.77	54.00	2.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

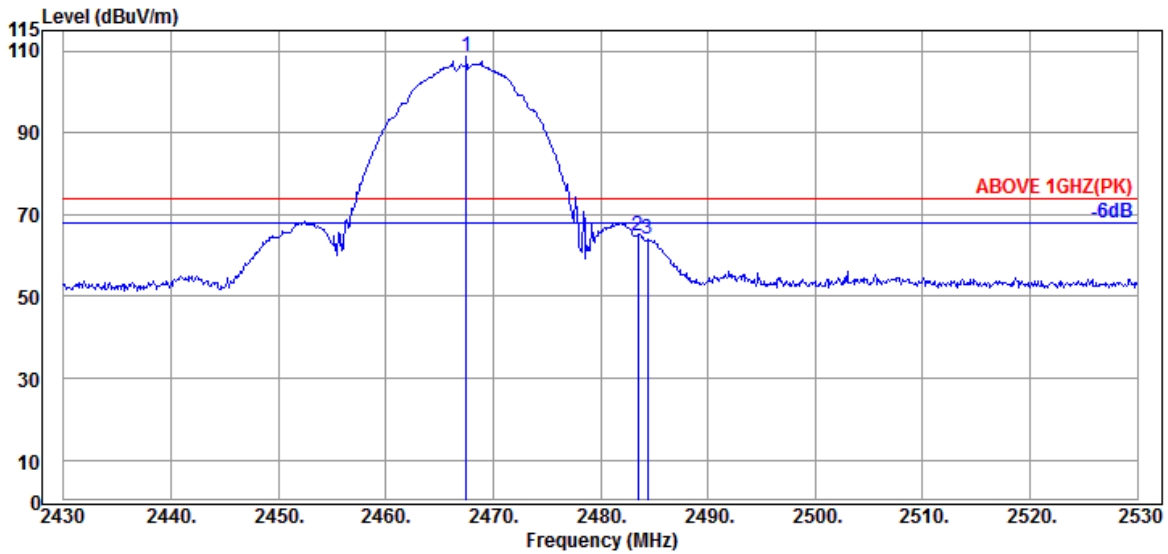

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.43	5.84	39.92	114.18	108.53	---	---	Peak
2483.500	28.47	5.87	39.92	70.45	64.87	74.00	9.13	Peak
2484.400	28.47	5.87	39.92	69.56	63.98	74.00	10.02	Peak

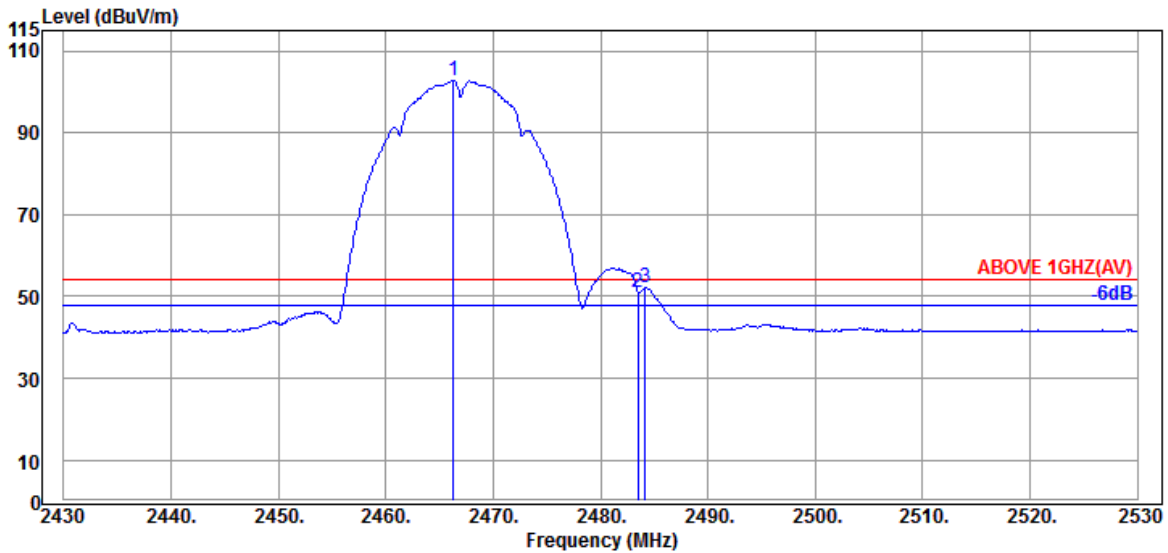


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	5.84	39.92	108.42	102.77	---	---	Average
2483.500	28.47	5.87	39.92	56.64	51.06	54.00	2.94	Average
2484.200	28.47	5.87	39.92	57.73	52.15	54.00	1.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

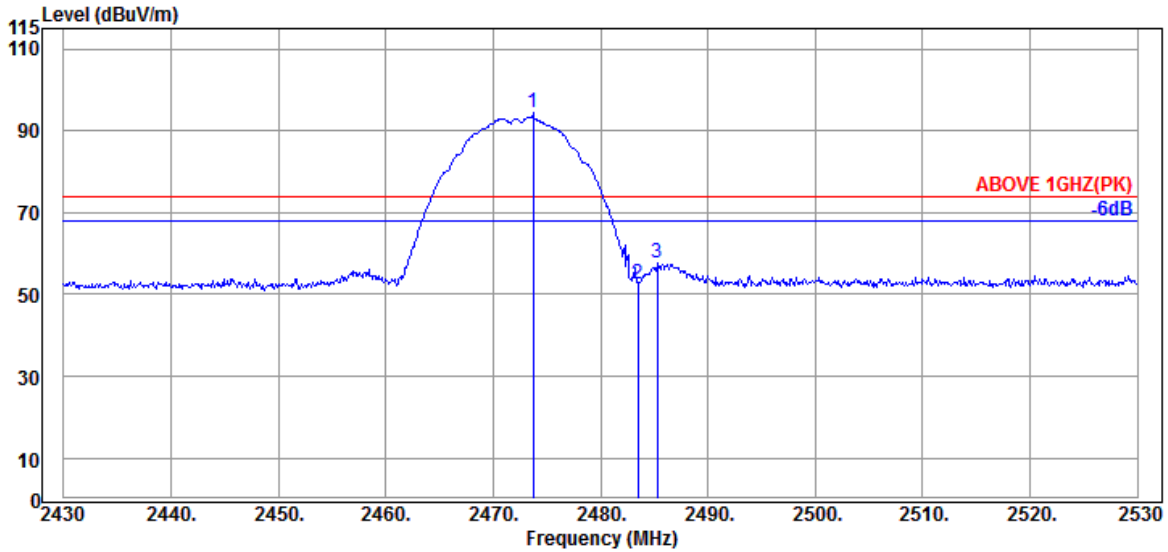

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.700	28.44	5.85	39.92	99.97	94.34	---	---	Peak
2483.500	28.47	5.87	39.92	57.96	52.38	74.00	21.62	Peak
2485.300	28.47	5.87	39.92	63.43	57.85	74.00	16.15	Peak

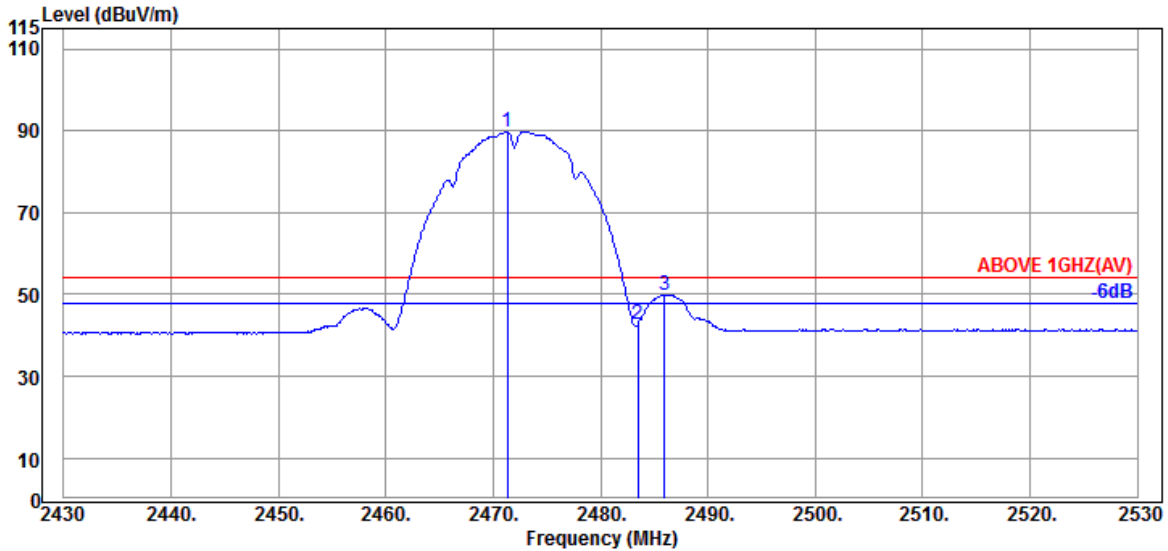


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	5.85	39.92	95.49	89.86	---	---	Average
2483.500	28.47	5.87	39.92	48.18	42.60	54.00	11.40	Average
2486.000	28.47	5.87	39.92	55.41	49.83	54.00	4.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

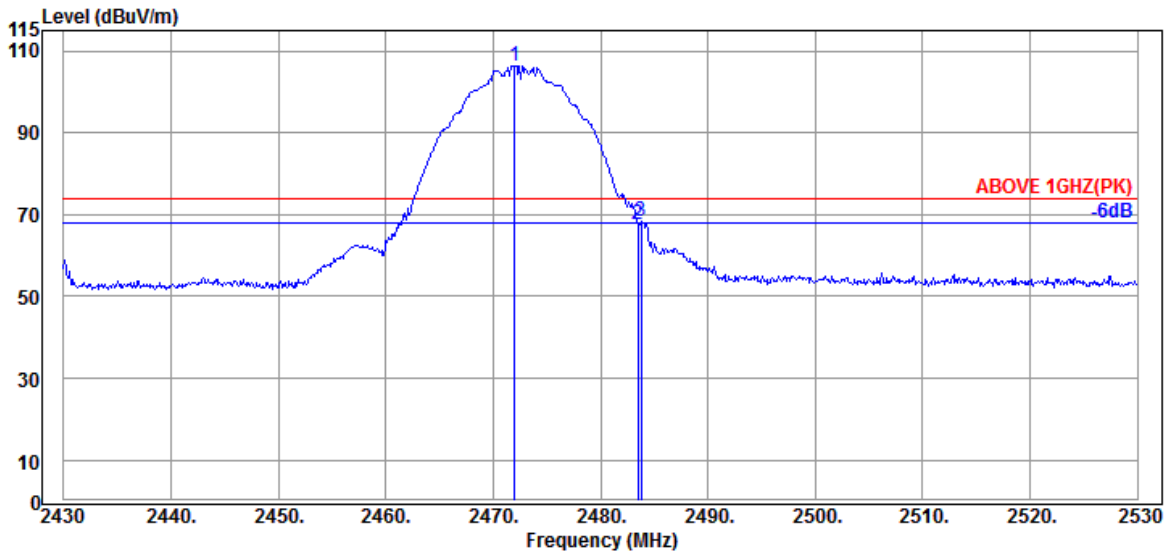

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.92	112.05	106.42	---	---	Peak
2483.500	28.47	5.87	39.92	73.08	67.50	74.00	6.50	Peak
2483.800	28.47	5.87	39.92	74.04	68.46	74.00	5.54	Peak

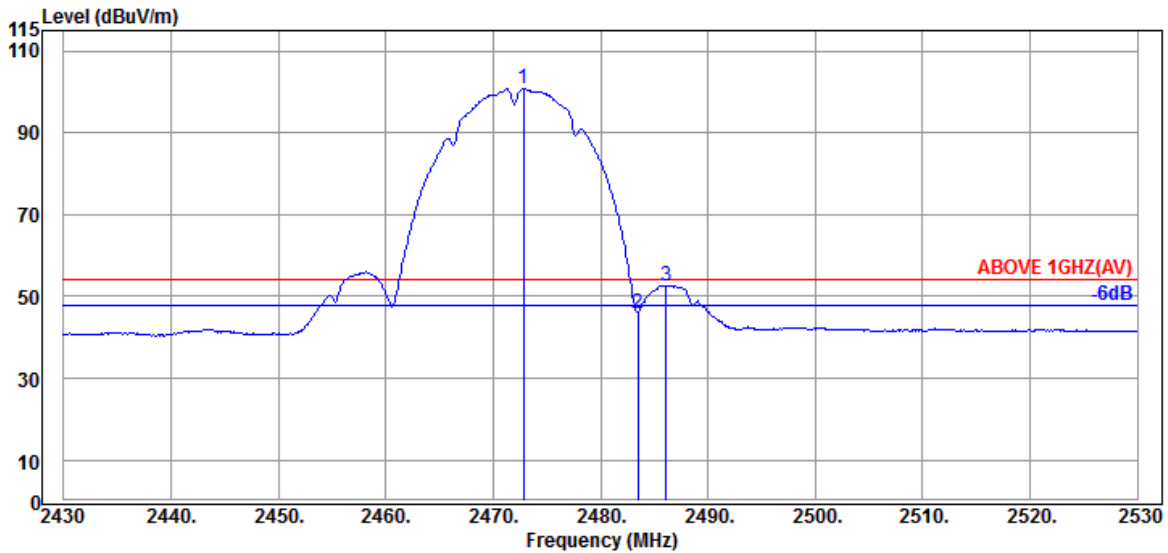


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.44	5.85	39.92	106.39	100.76	---	---	Average
2483.500	28.47	5.87	39.92	51.37	45.79	54.00	8.21	Average
2486.100	28.47	5.87	39.92	58.02	52.44	54.00	1.56	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

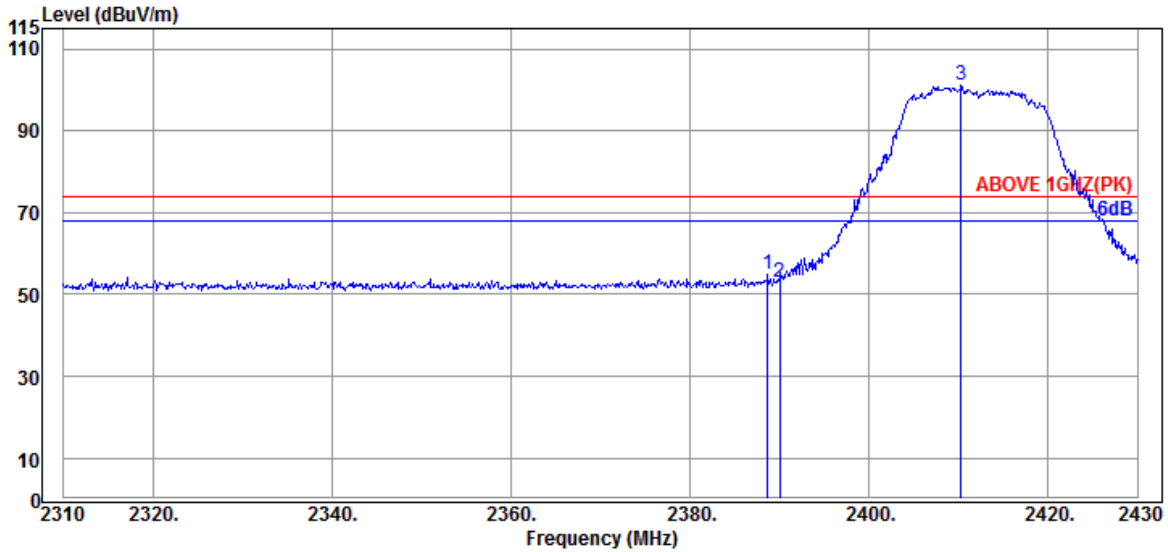

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.21	5.72	39.93	60.78	54.78	74.00	19.22	Peak
2390.040	28.21	5.72	39.93	59.15	53.15	74.00	20.85	Peak
@ 2410.320	28.14	5.75	39.93	107.26	101.22	---	---	Peak

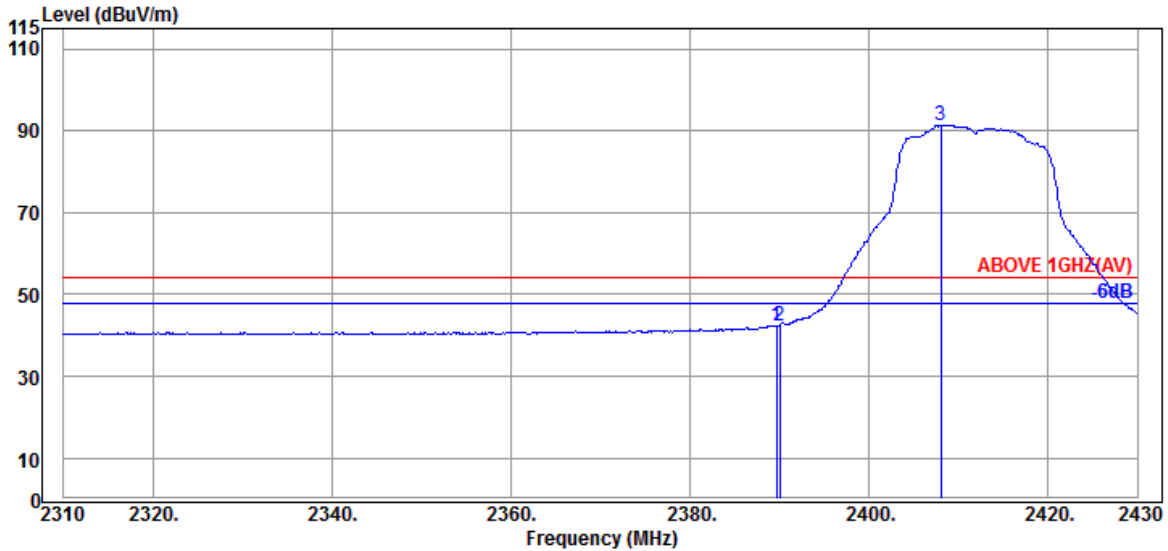


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	48.44	42.44	54.00	11.56	Average
2390.040	28.21	5.72	39.93	48.41	42.41	54.00	11.59	Average
@ 2408.040	28.14	5.75	39.93	97.52	91.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

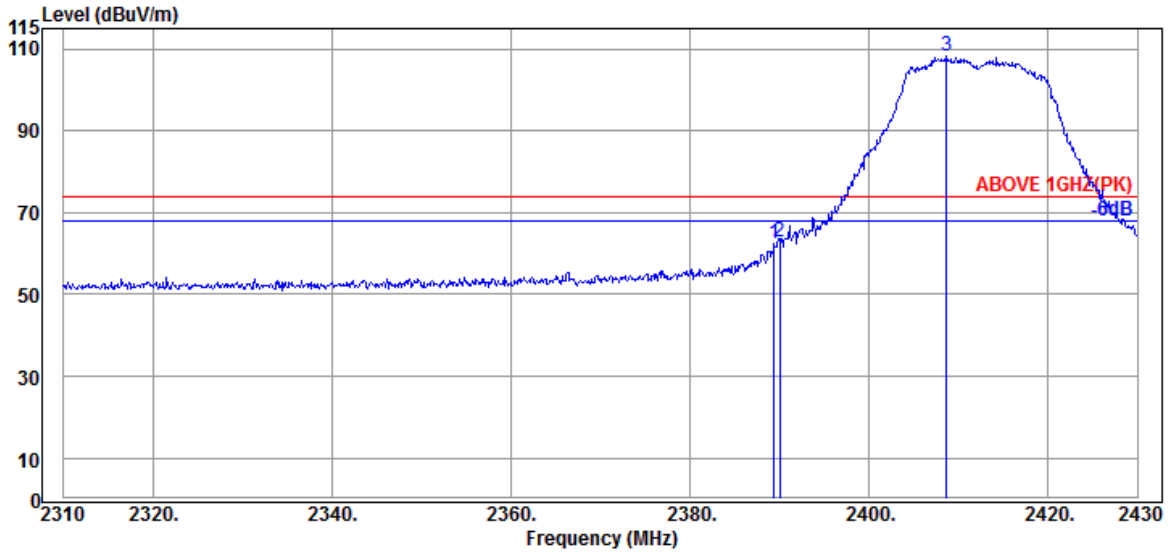

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	68.59	62.59	74.00	11.41	Peak
2390.040	28.21	5.72	39.93	68.70	62.70	74.00	11.30	Peak
@ 2408.640	28.14	5.75	39.93	114.17	108.13	---	---	Peak

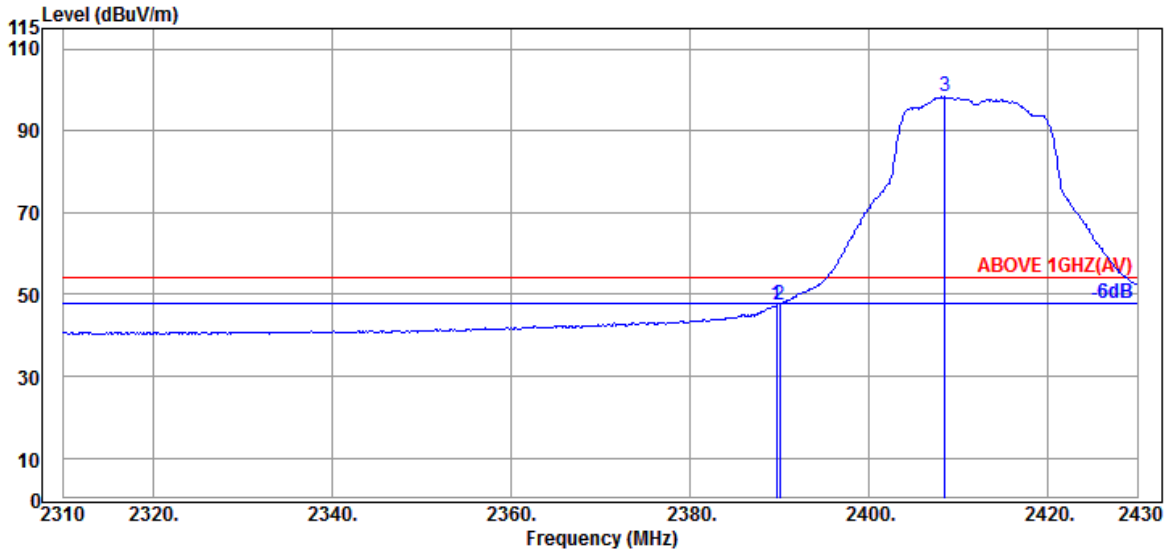


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	53.23	47.23	54.00	6.77	Average
2390.040	28.21	5.72	39.93	53.43	47.43	54.00	6.57	Average
@ 2408.520	28.14	5.75	39.93	104.28	98.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

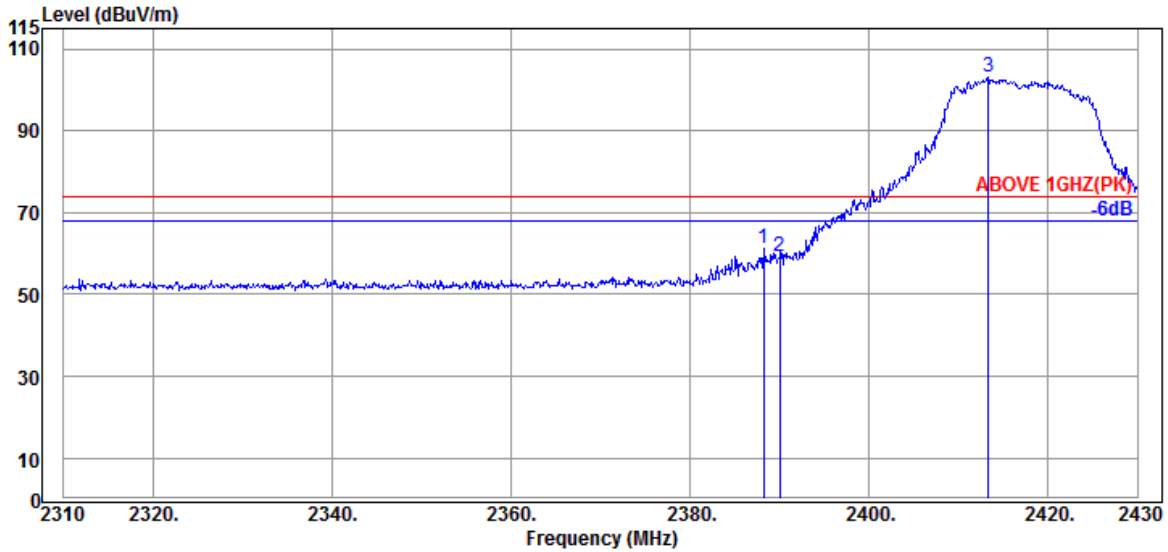

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.240	28.21	5.72	39.93	67.38	61.38	74.00	12.62	Peak
2390.040	28.21	5.72	39.93	65.43	59.43	74.00	14.57	Peak
@ 2413.320	28.19	5.76	39.93	108.98	103.00	---	---	Peak

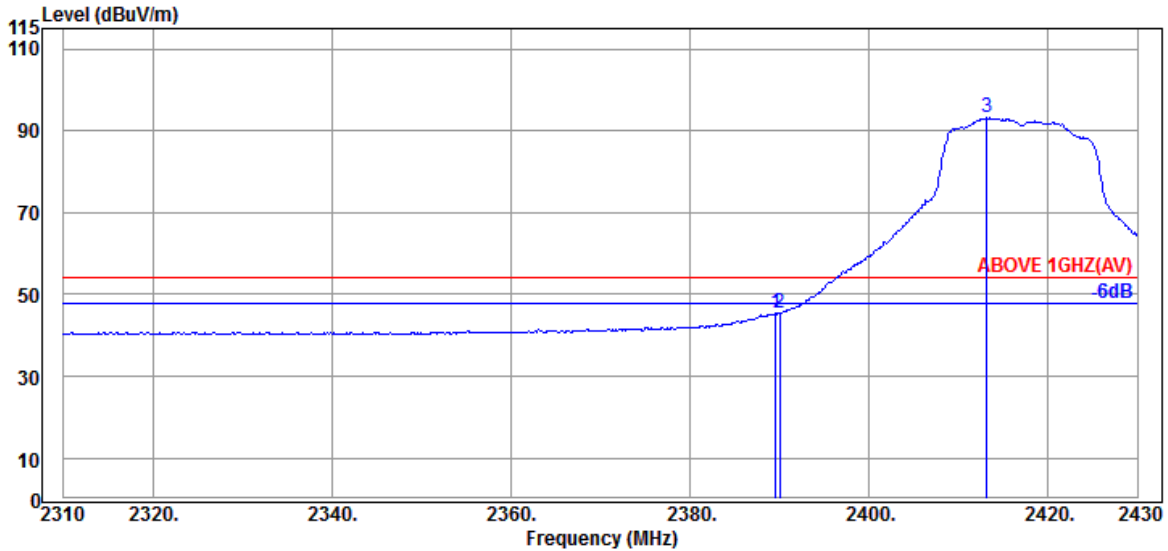


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	51.31	45.31	54.00	8.69	Average
2390.040	28.21	5.72	39.93	51.43	45.43	54.00	8.57	Average
@ 2413.200	28.19	5.76	39.93	99.12	93.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

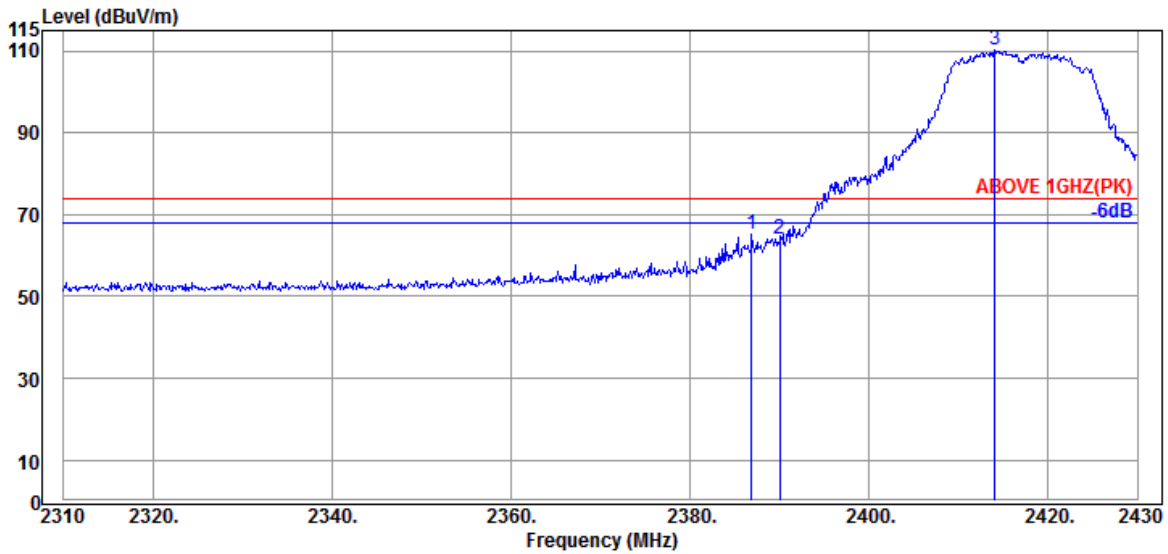

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.920	28.21	5.72	39.93	71.13	65.13	74.00	8.87	Peak
2390.040	28.21	5.72	39.93	70.17	64.17	74.00	9.83	Peak
@ 2414.040	28.19	5.76	39.93	116.07	110.09	---	---	Peak


Antenna at Vertical Polarization

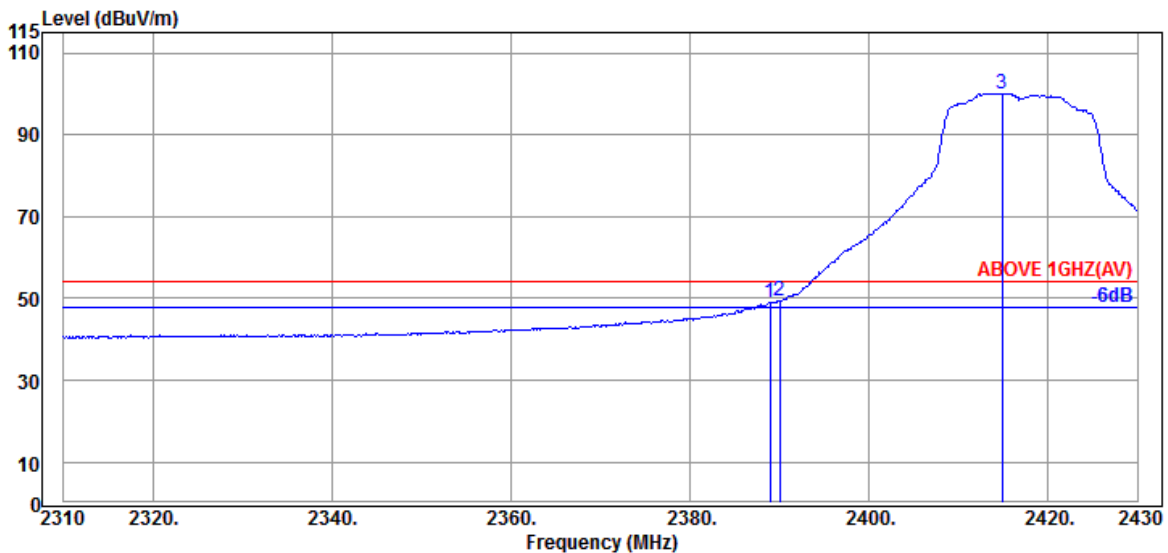

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	55.10	49.10	54.00	4.90	Average
2390.040	28.21	5.72	39.93	55.33	49.33	54.00	4.67	Average
@ 2414.880	28.19	5.76	39.93	106.14	100.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

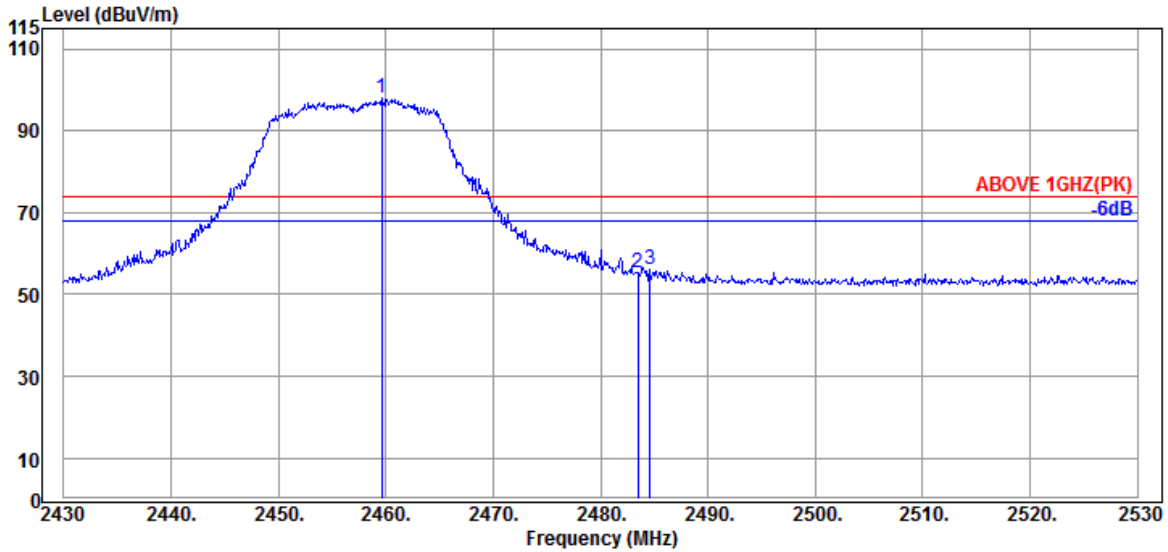

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.41	5.83	39.92	103.56	97.88	---	---	Peak
2483.500	28.47	5.87	39.92	60.72	55.14	74.00	18.86	Peak
2484.600	28.47	5.87	39.92	61.79	56.21	74.00	17.79	Peak

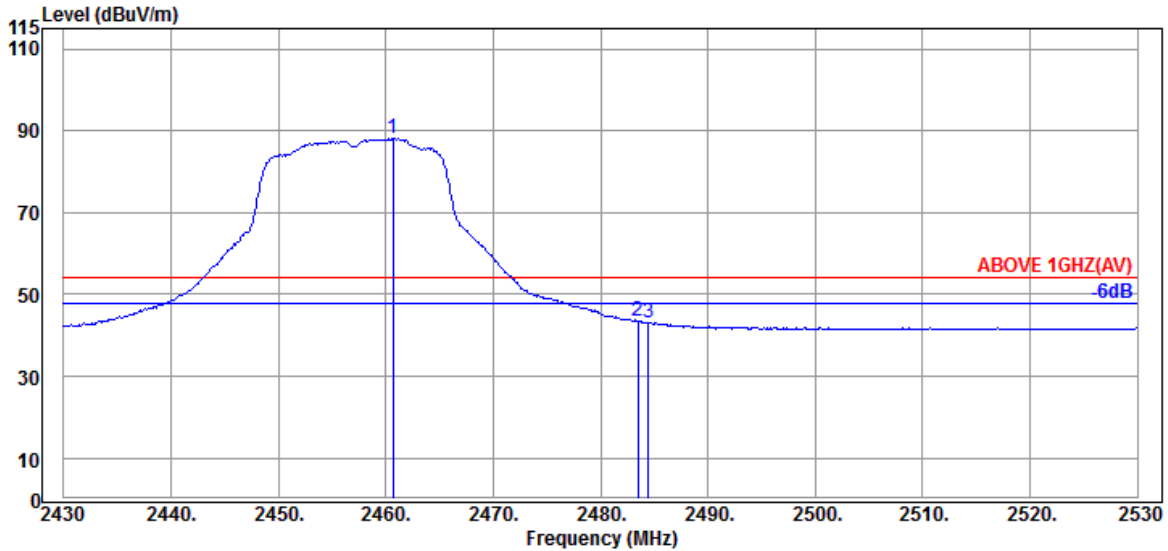


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.43	5.84	39.92	93.73	88.08	---	---	Average
2483.500	28.47	5.87	39.92	48.86	43.28	54.00	10.72	Average
2484.500	28.47	5.87	39.92	48.75	43.17	54.00	10.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

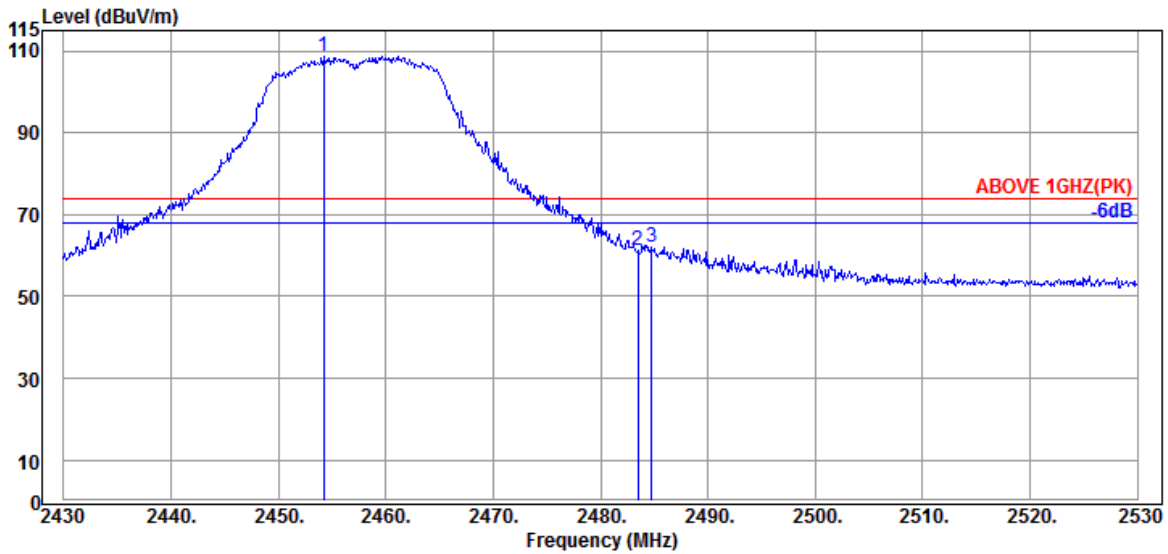

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.200	28.41	5.83	39.92	114.41	108.73	---	---	Peak
2483.500	28.47	5.87	39.92	66.73	61.15	74.00	12.85	Peak
2484.800	28.47	5.87	39.92	67.72	62.14	74.00	11.86	Peak

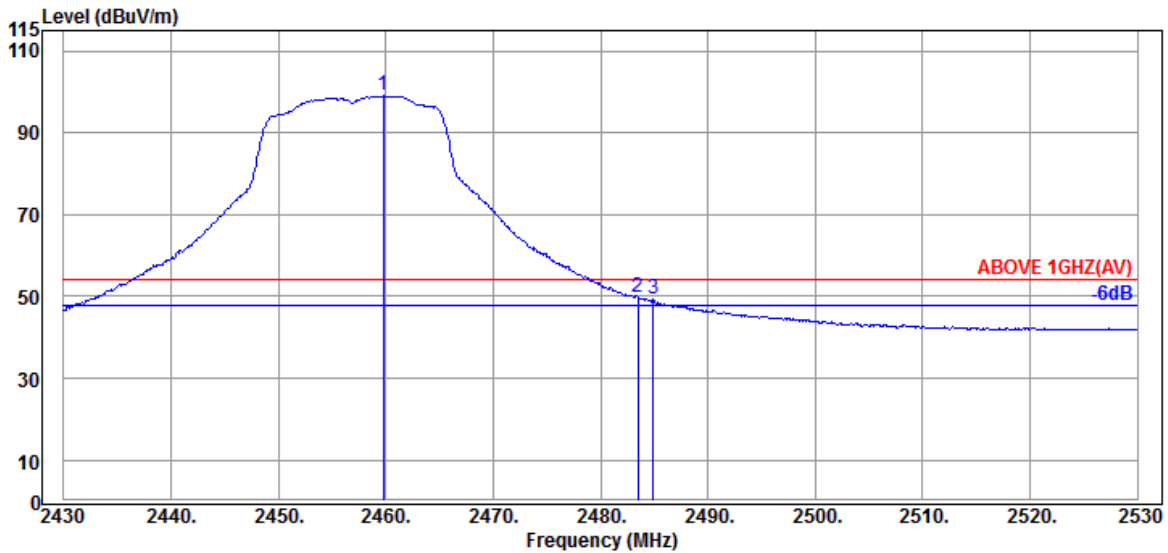


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.41	5.83	39.92	104.69	99.01	---	---	Average
2483.500	28.47	5.87	39.92	55.38	49.80	54.00	4.20	Average
2484.900	28.47	5.87	39.92	54.94	49.36	54.00	4.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

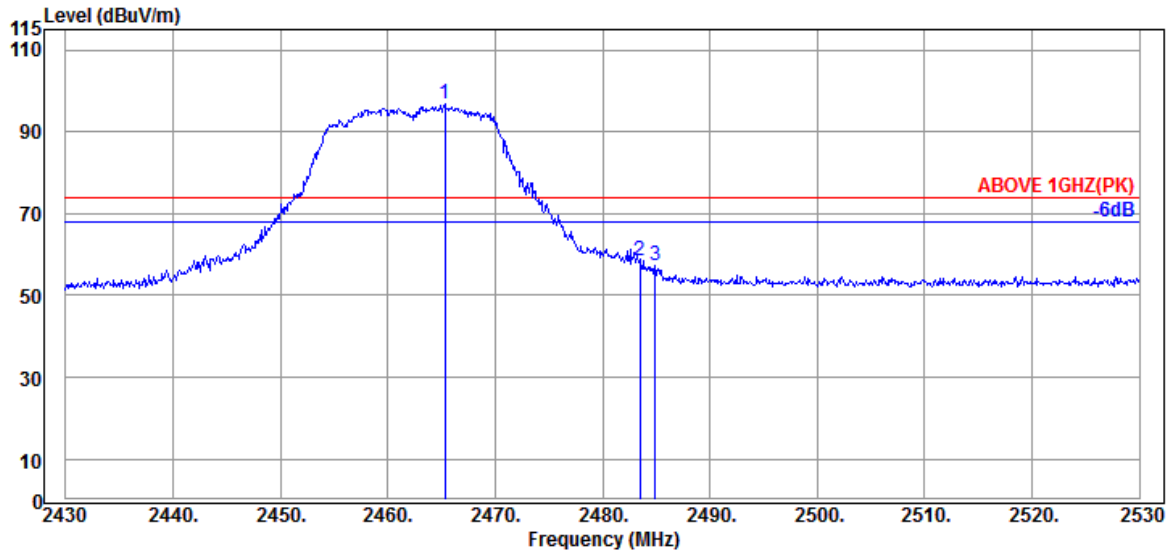

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	5.84	39.92	102.29	96.64	---	---	Peak
2483.500	28.47	5.87	39.92	63.91	58.33	74.00	15.67	Peak
2484.900	28.47	5.87	39.92	62.95	57.37	74.00	16.63	Peak

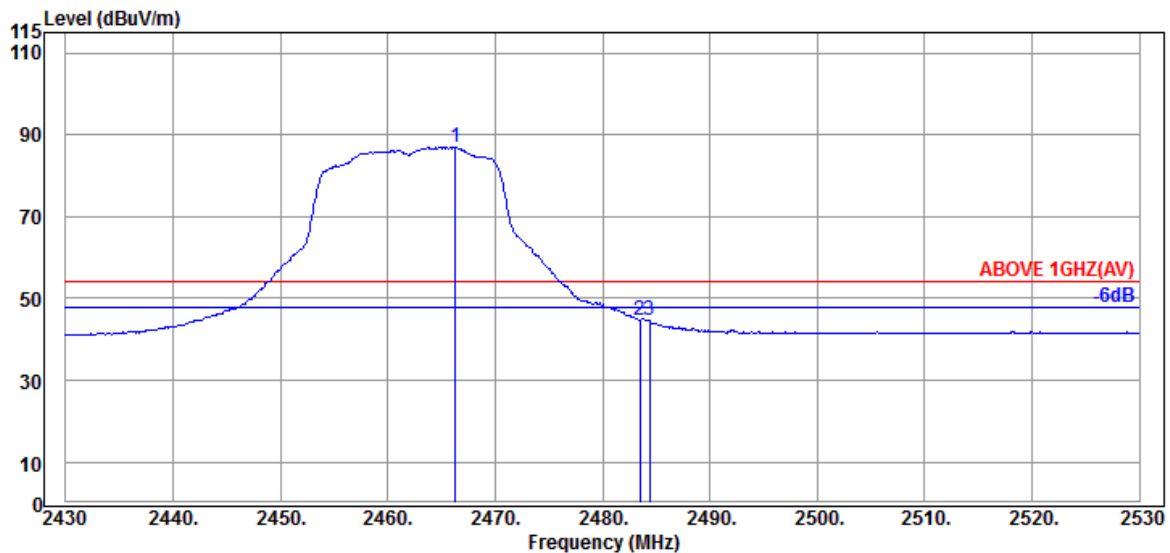


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	5.84	39.92	92.55	86.90	---	---	Average
2483.500	28.47	5.87	39.92	50.36	44.78	54.00	9.22	Average
2484.400	28.47	5.87	39.92	50.05	44.47	54.00	9.53	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

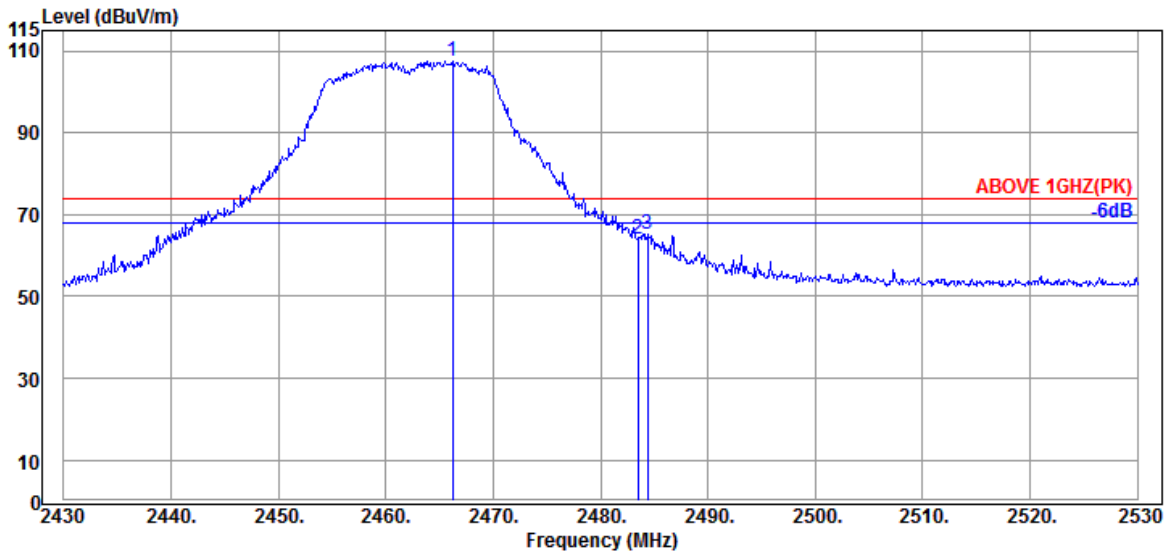

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	5.84	39.92	113.12	107.47	---	---	Peak
2483.500	28.47	5.87	39.92	69.71	64.13	74.00	9.87	Peak
2484.400	28.47	5.87	39.92	70.74	65.16	74.00	8.84	Peak

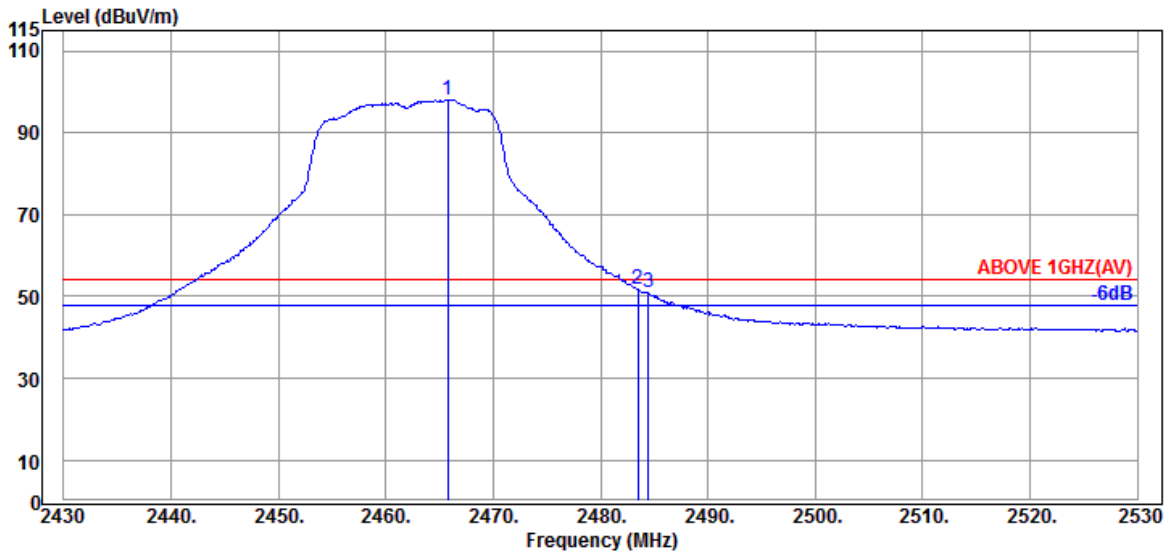


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.43	5.84	39.92	103.76	98.11	---	---	Average
2483.500	28.47	5.87	39.92	57.43	51.85	54.00	2.15	Average
2484.500	28.47	5.87	39.92	56.38	50.80	54.00	3.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

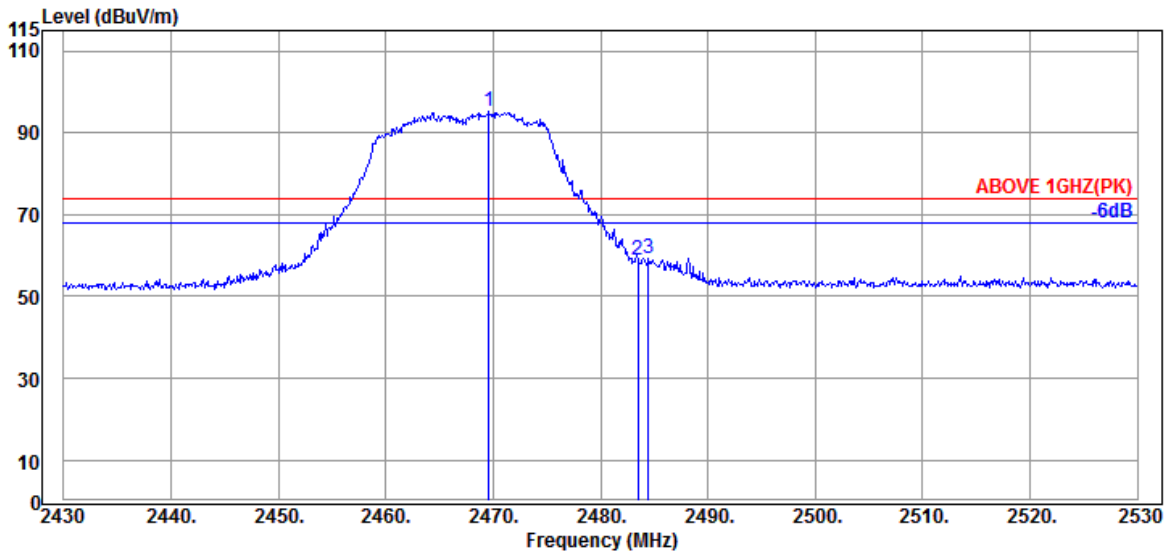

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.600	28.44	5.85	39.92	100.82	95.19	---	---	Peak
2483.500	28.47	5.87	39.92	64.39	58.81	74.00	15.19	Peak
2484.500	28.47	5.87	39.92	64.83	59.25	74.00	14.75	Peak

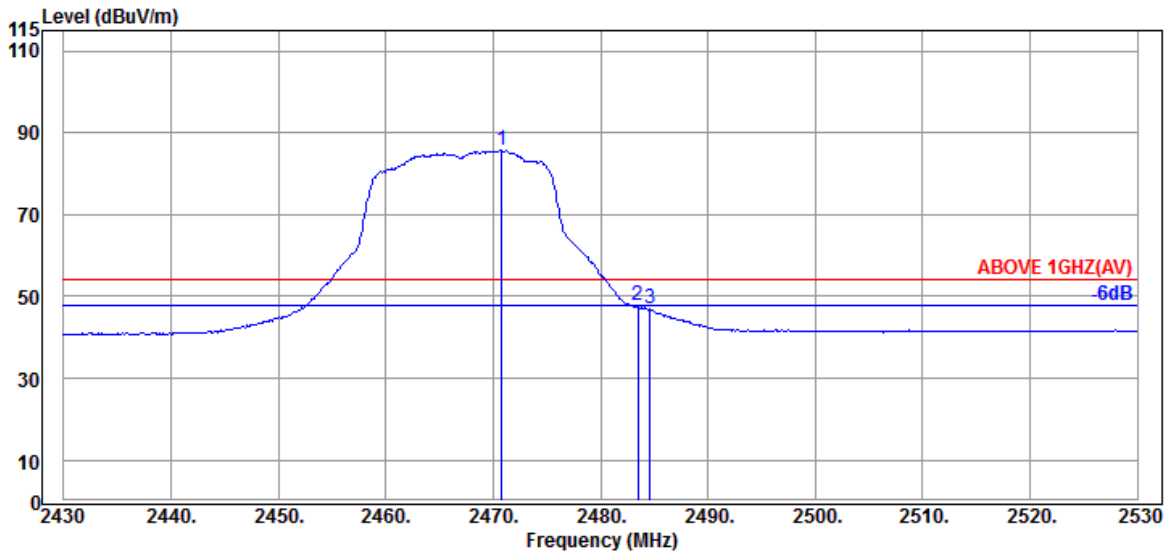


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	5.85	39.92	91.47	85.84	---	---	Average
2483.500	28.47	5.87	39.92	53.27	47.69	54.00	6.31	Average
2484.600	28.47	5.87	39.92	52.53	46.95	54.00	7.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

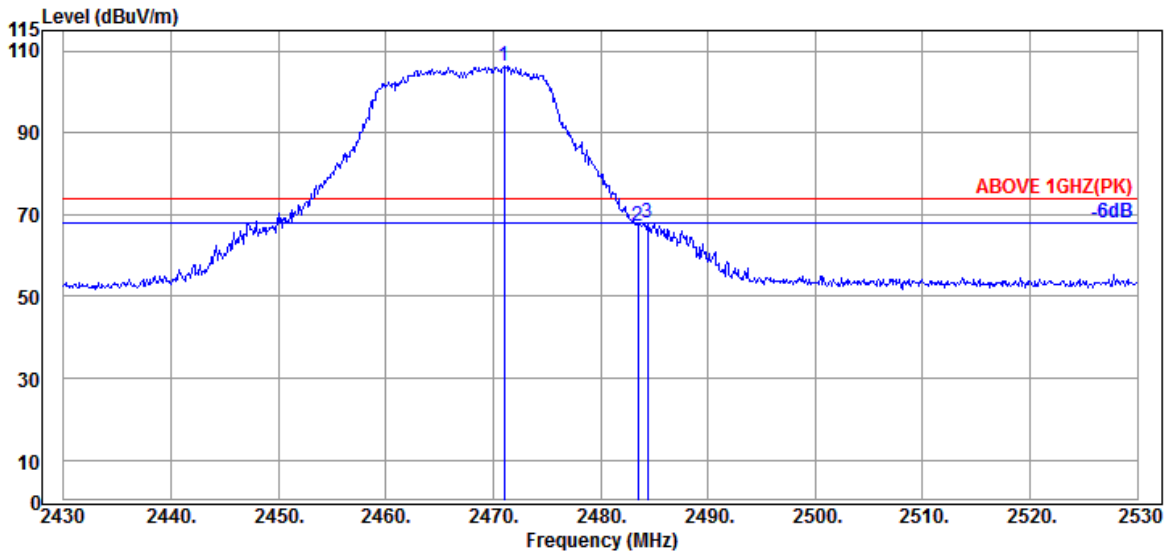

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.44	5.85	39.92	112.02	106.39	---	---	Peak
2483.500	28.47	5.87	39.92	72.85	67.27	74.00	6.73	Peak
2484.400	28.47	5.87	39.92	73.45	67.87	74.00	6.13	Peak

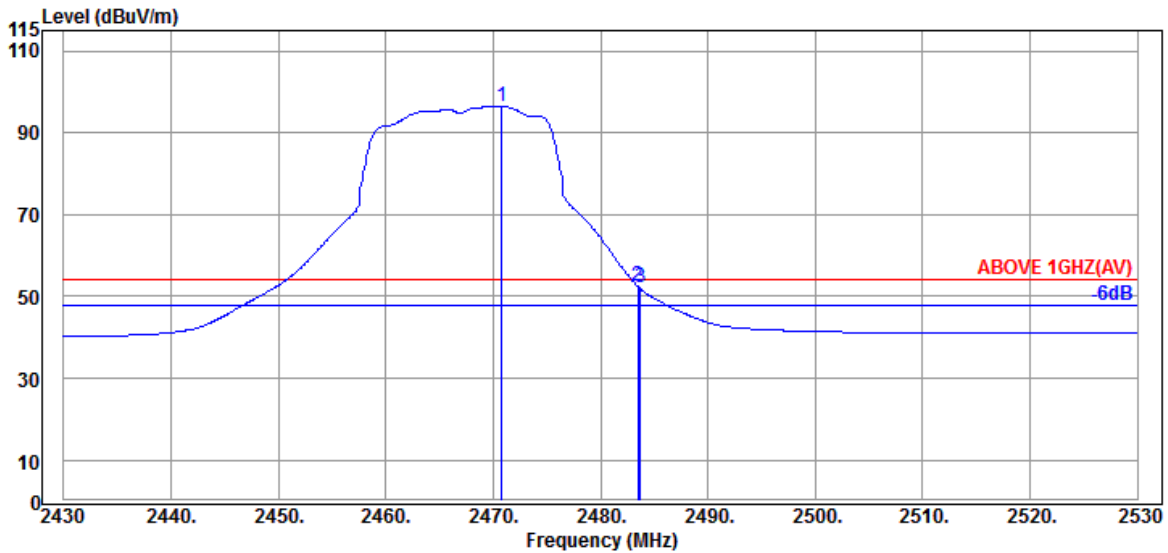


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	5.85	39.92	102.07	96.44	---	---	Average
2483.500	28.47	5.87	39.92	58.01	52.43	54.00	1.57	Average
2483.700	28.47	5.87	39.92	57.60	52.02	54.00	1.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

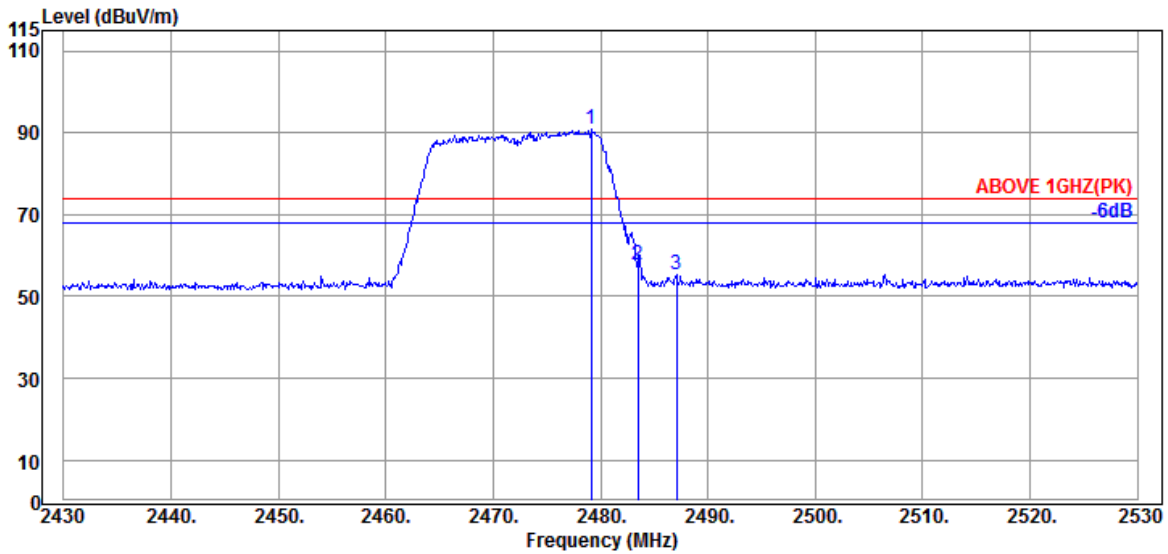

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	5.86	39.92	96.31	90.71	---	---	Peak
2483.500	28.47	5.87	39.92	63.45	57.87	74.00	16.13	Peak
2487.100	28.47	5.87	39.92	60.87	55.29	74.00	18.71	Peak

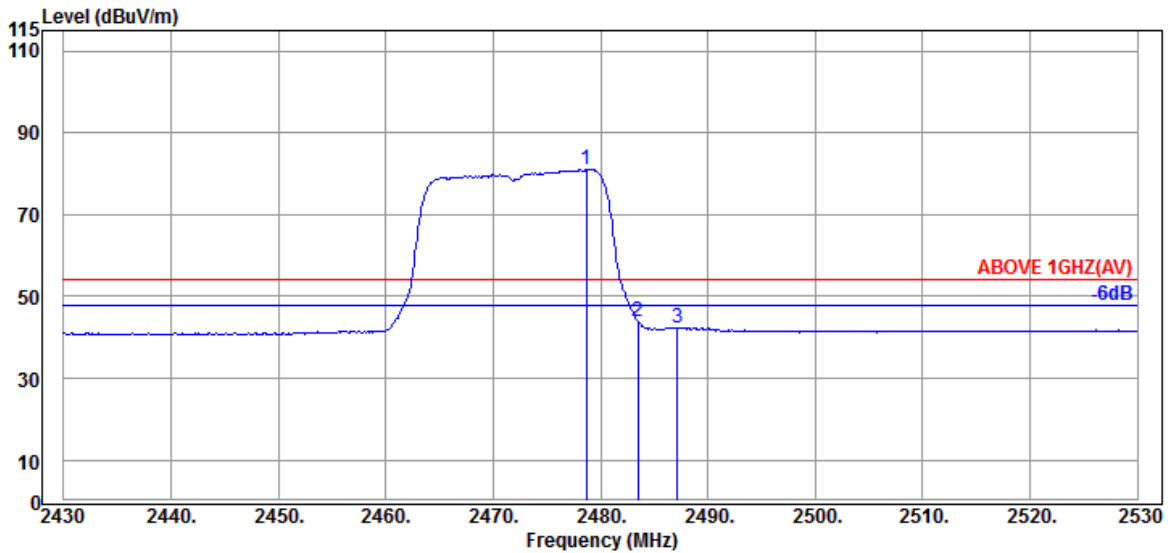


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.46	5.86	39.92	86.70	81.10	---	---	Average
2483.500	28.47	5.87	39.92	49.52	43.94	54.00	10.06	Average
2487.200	28.47	5.87	39.92	48.01	42.43	54.00	11.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

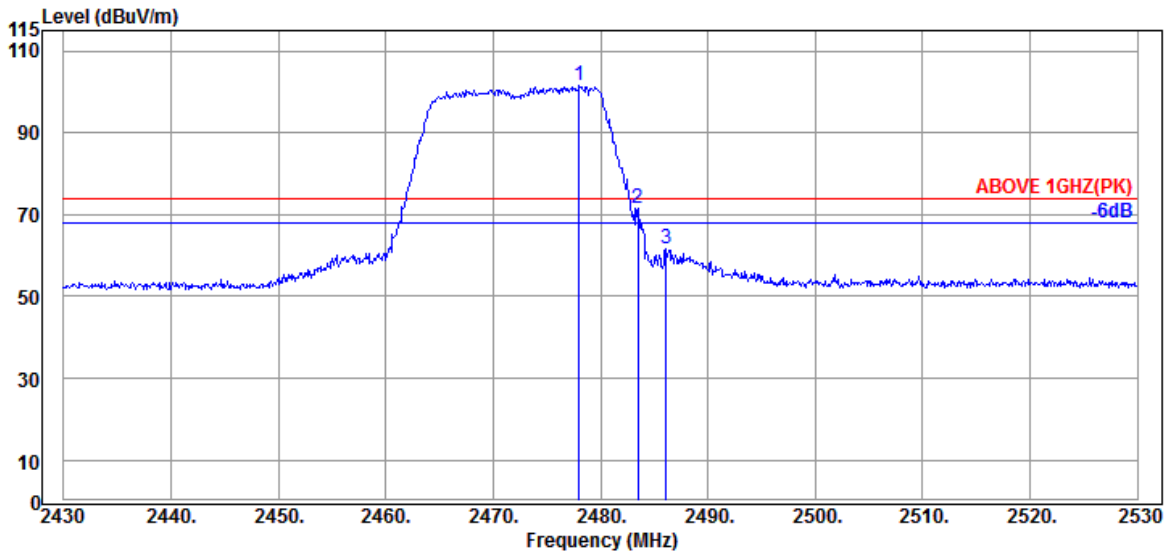

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.46	5.86	39.92	107.01	101.41	---	---	Peak
2483.500	28.47	5.87	39.92	77.26	71.68	74.00	2.32	Peak
2486.100	28.47	5.87	39.92	67.40	61.82	74.00	12.18	Peak

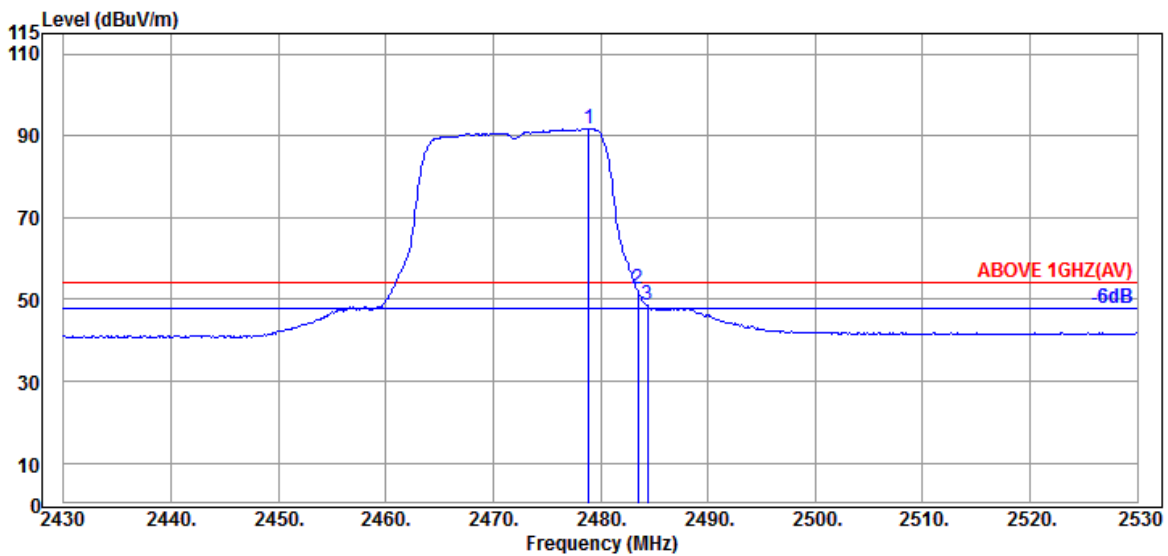


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.46	5.86	39.92	97.39	91.79	---	---	Average
2483.500	28.47	5.87	39.92	57.95	52.37	54.00	1.63	Average
2484.400	28.47	5.87	39.92	53.99	48.41	54.00	5.59	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

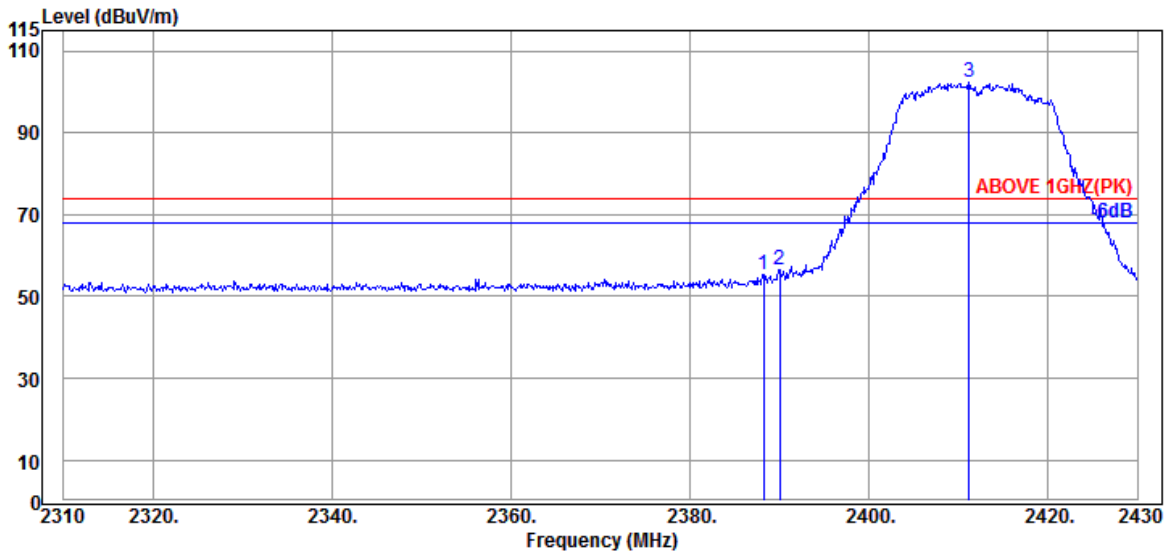

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.240	28.21	5.72	39.93	61.39	55.39	74.00	18.61	Peak
2390.040	28.21	5.72	39.93	62.56	56.56	74.00	17.44	Peak
@ 2411.160	28.14	5.75	39.93	108.40	102.36	---	---	Peak

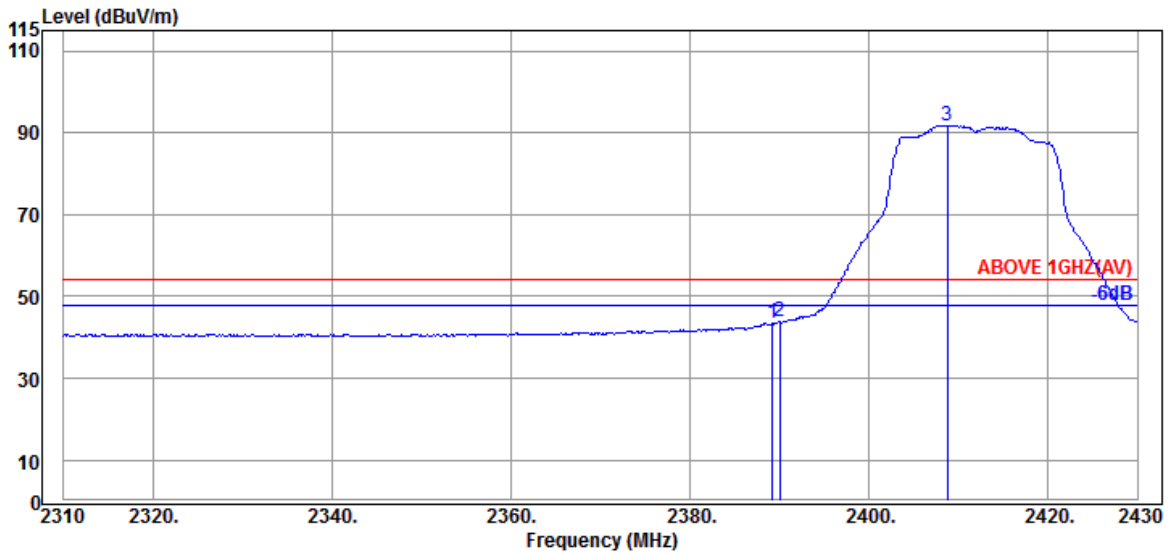


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.21	5.72	39.93	49.42	43.42	54.00	10.58	Average
2390.040	28.21	5.72	39.93	49.69	43.69	54.00	10.31	Average
@ 2408.760	28.14	5.75	39.93	97.85	91.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

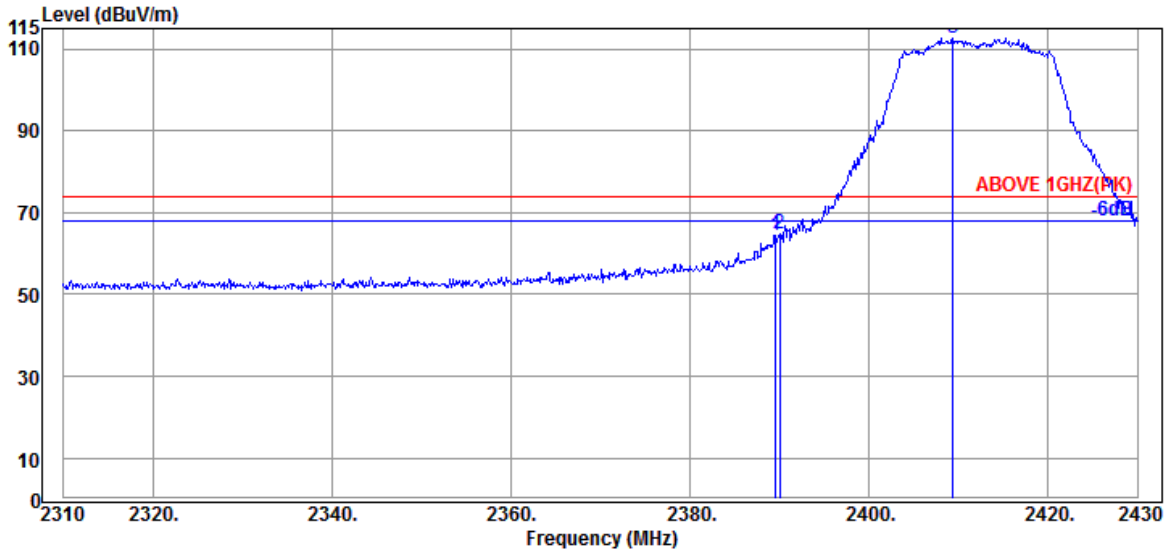

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	70.35	64.35	74.00	9.65	Peak
2390.040	28.21	5.72	39.93	70.95	64.95	74.00	9.05	Peak
@ 2409.360	28.14	5.75	39.93	118.70	112.66	---	---	Peak

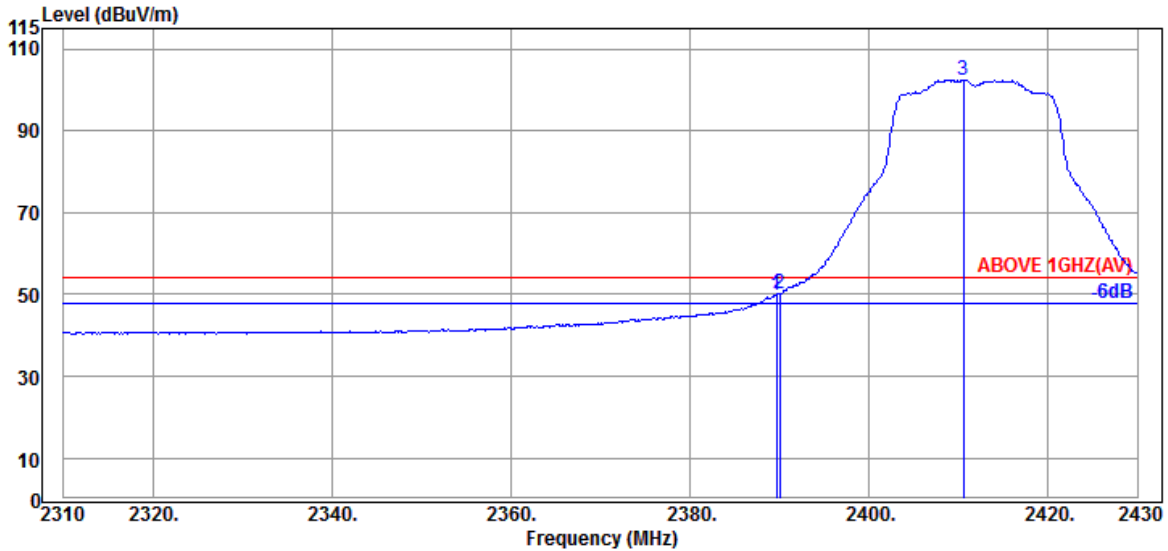


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	55.89	49.89	54.00	4.11	Average
2390.040	28.21	5.72	39.93	56.26	50.26	54.00	3.74	Average
@ 2410.560	28.14	5.75	39.93	108.47	102.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

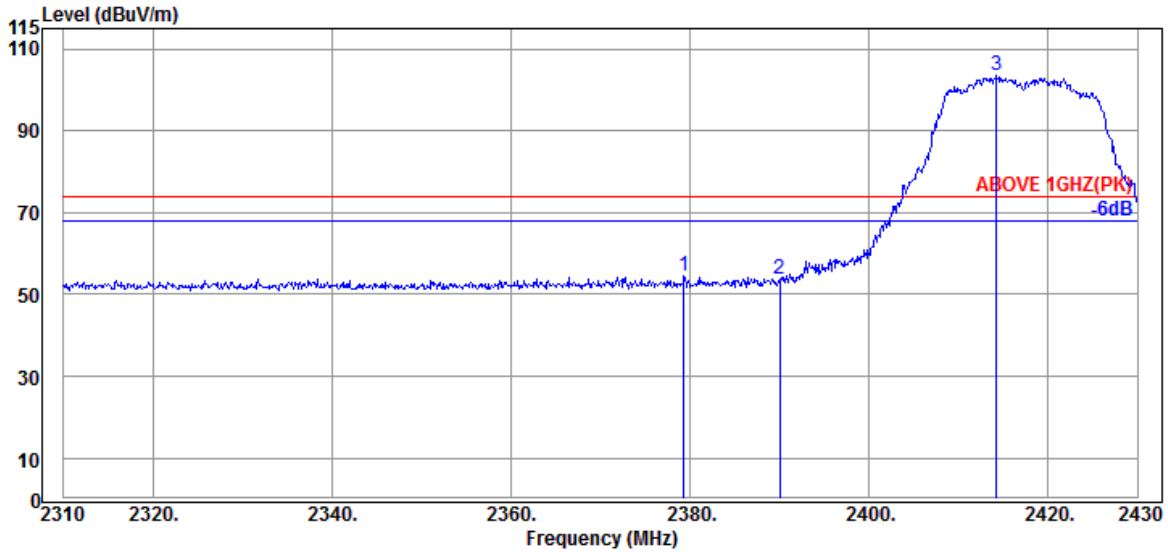

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.360	28.27	5.71	39.93	60.48	54.53	74.00	19.47	Peak
2390.040	28.21	5.72	39.93	59.68	53.68	74.00	20.32	Peak
@ 2414.280	28.19	5.76	39.93	109.60	103.62	---	---	Peak

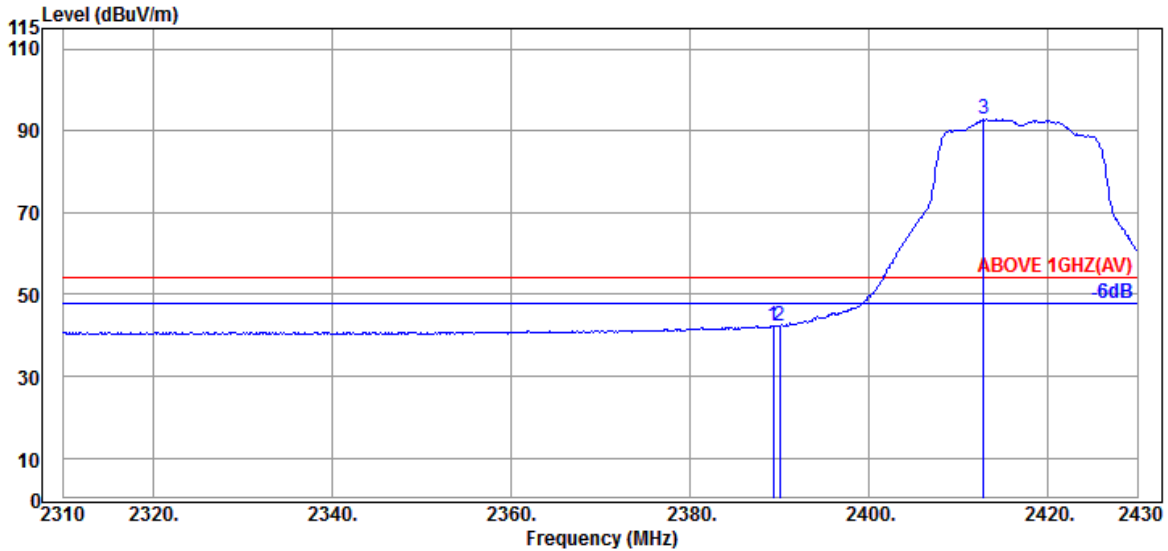


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	48.32	42.32	54.00	11.68	Average
2390.040	28.21	5.72	39.93	48.19	42.19	54.00	11.81	Average
@ 2412.840	28.19	5.76	39.93	98.84	92.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

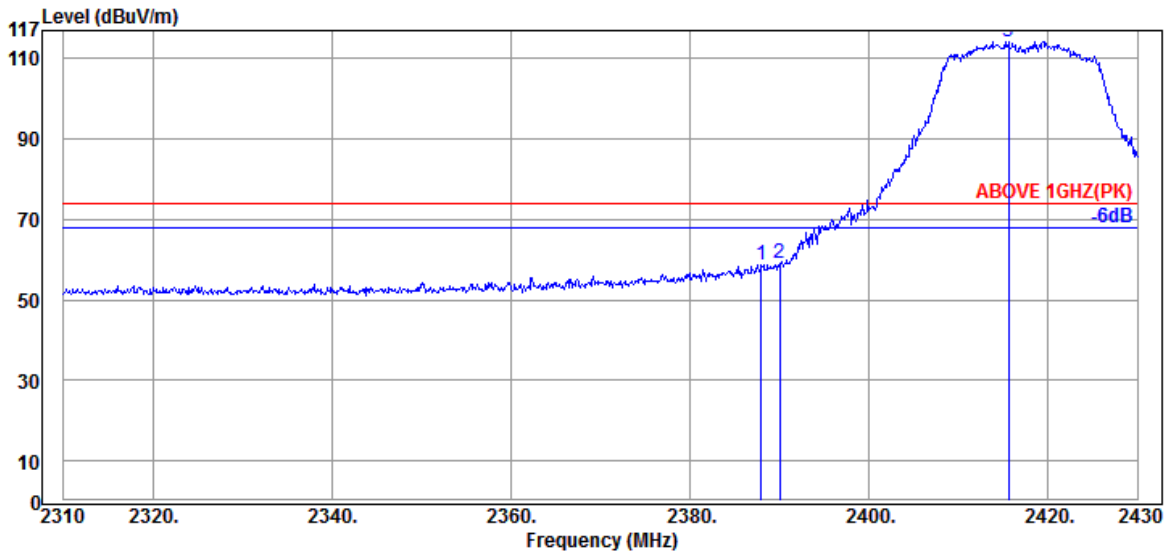

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.21	5.72	39.93	64.83	58.83	74.00	15.17	Peak
2390.040	28.21	5.72	39.93	64.93	58.93	74.00	15.07	Peak
@ 2415.600	28.19	5.76	39.93	120.19	114.21	---	---	Peak

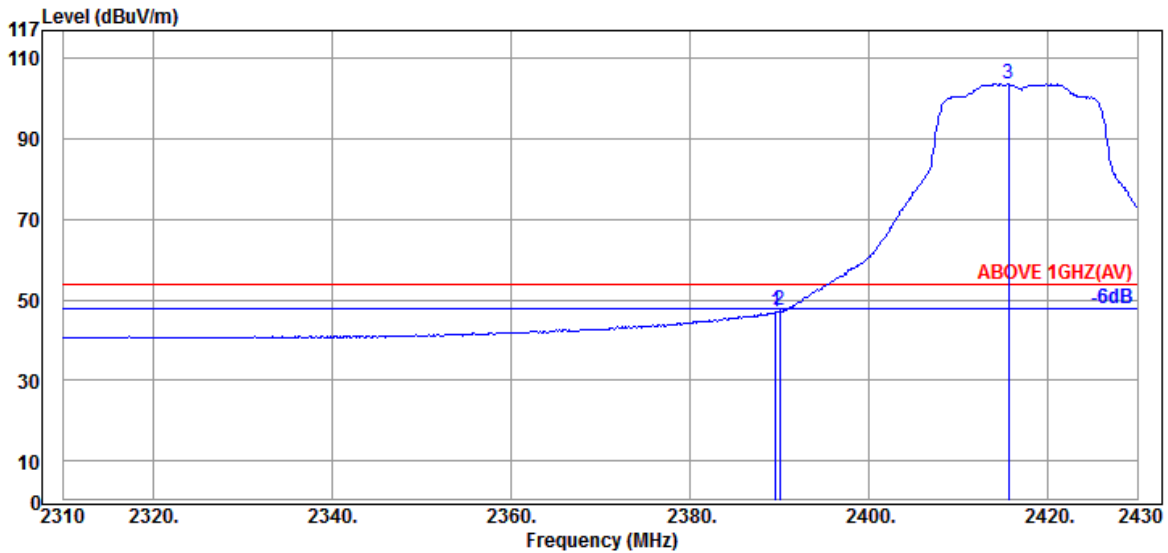


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	53.03	47.03	54.00	6.97	Average
2390.040	28.21	5.72	39.93	53.28	47.28	54.00	6.72	Average
@ 2415.600	28.19	5.76	39.93	109.85	103.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

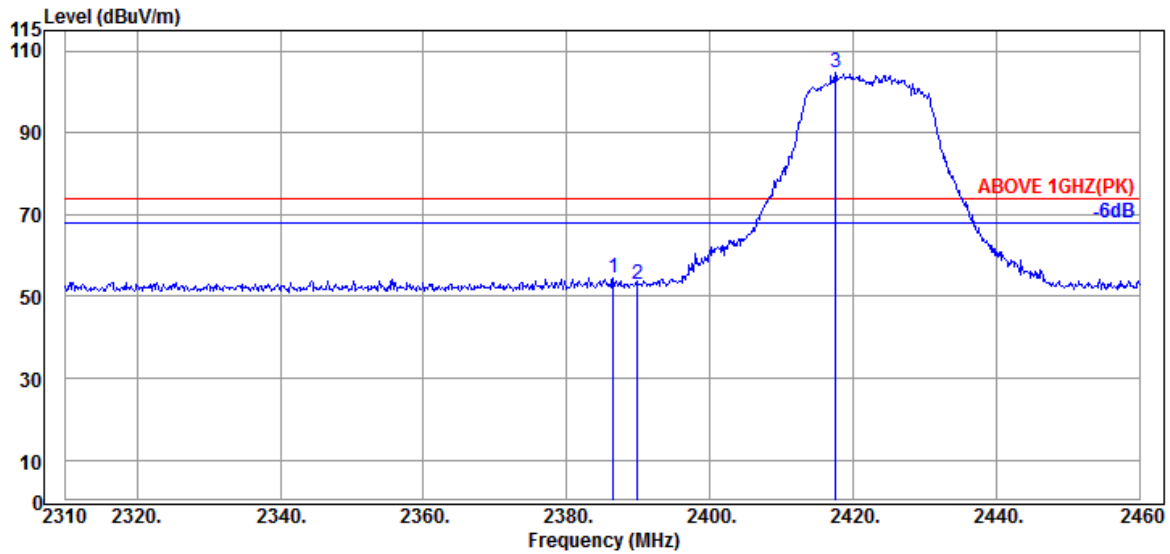

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.21	5.72	39.93	60.47	54.47	74.00	19.53	Peak
2389.950	28.21	5.72	39.93	58.99	52.99	74.00	21.01	Peak
@ 2417.550	28.19	5.76	39.93	110.62	104.64	---	---	Peak

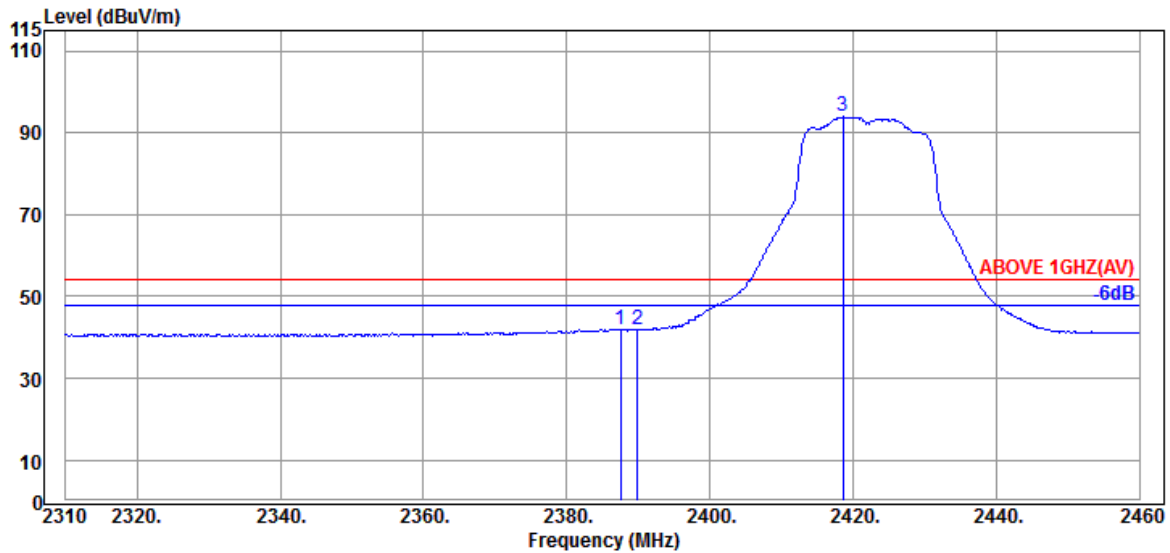


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	28.21	5.72	39.93	47.99	41.99	54.00	12.01	Average
2389.950	28.21	5.72	39.93	47.75	41.75	54.00	12.25	Average
@ 2418.600	28.23	5.77	39.93	99.90	93.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

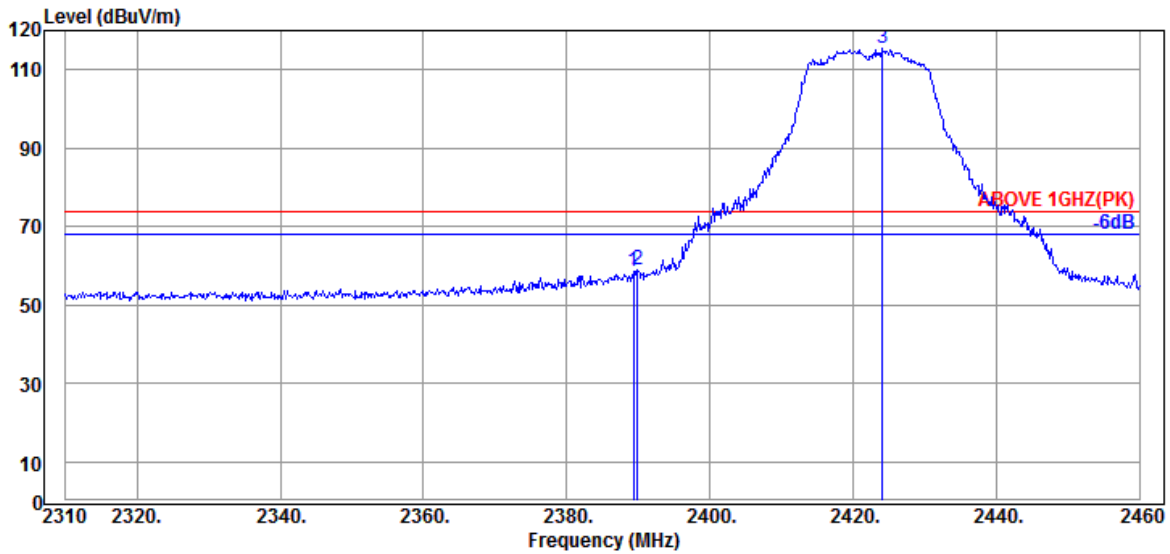

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.21	5.72	39.93	64.48	58.48	74.00	15.52	Peak
2389.950	28.21	5.72	39.93	64.93	58.93	74.00	15.07	Peak
@ 2424.150	28.23	5.77	39.93	121.44	115.51	---	---	Peak

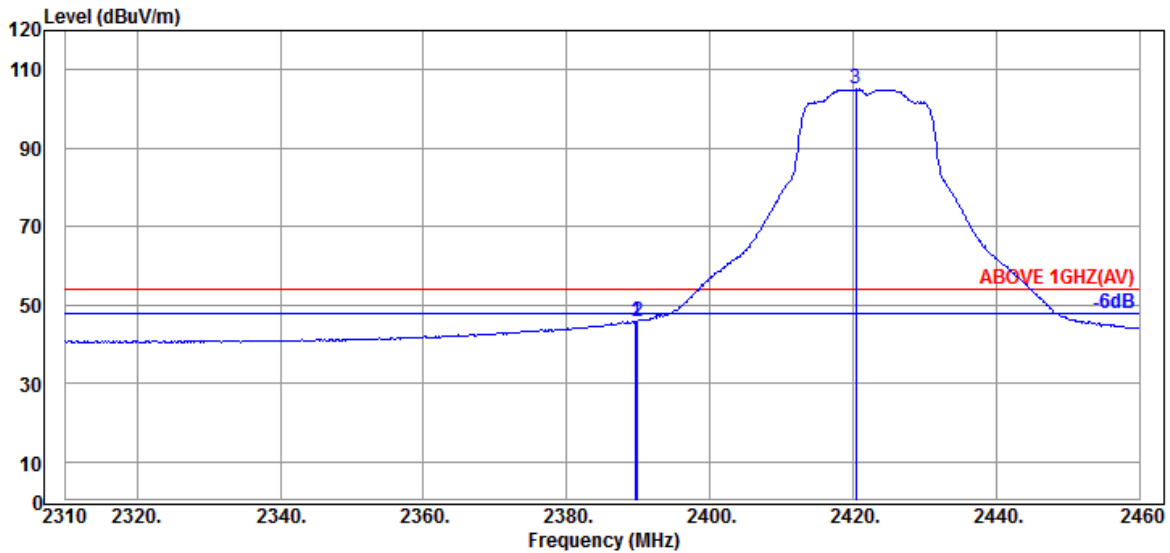


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	51.84	45.84	54.00	8.16	Average
2389.950	28.21	5.72	39.93	51.82	45.82	54.00	8.18	Average
@ 2420.400	28.23	5.77	39.93	110.88	104.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

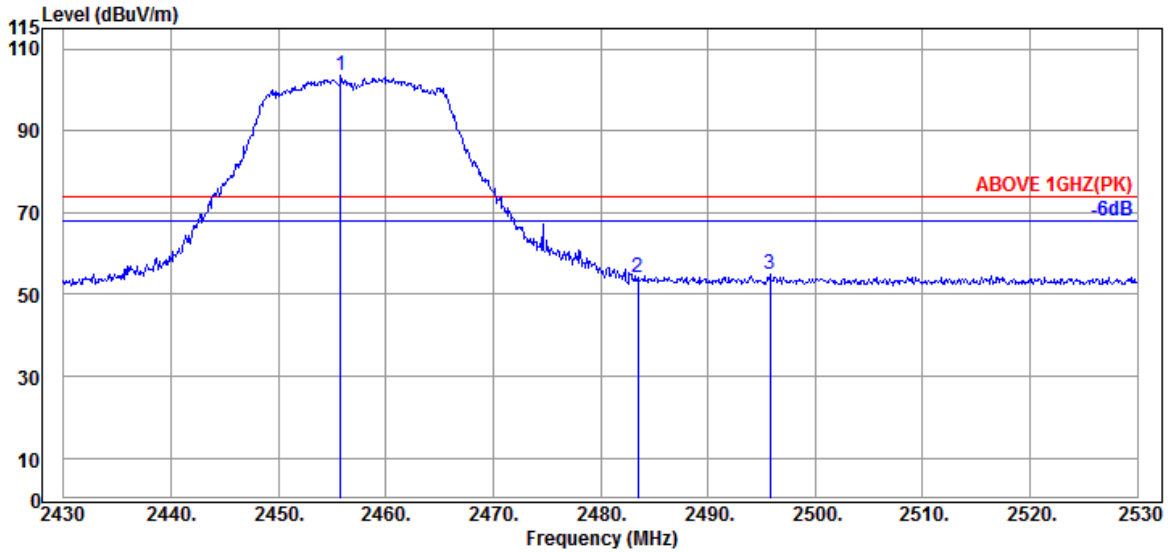

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.800	28.41	5.83	39.92	109.28	103.60	---	---	Peak
2483.500	28.47	5.87	39.92	59.85	54.27	74.00	19.73	Peak
2495.800	28.49	5.88	39.92	60.30	54.75	74.00	19.25	Peak

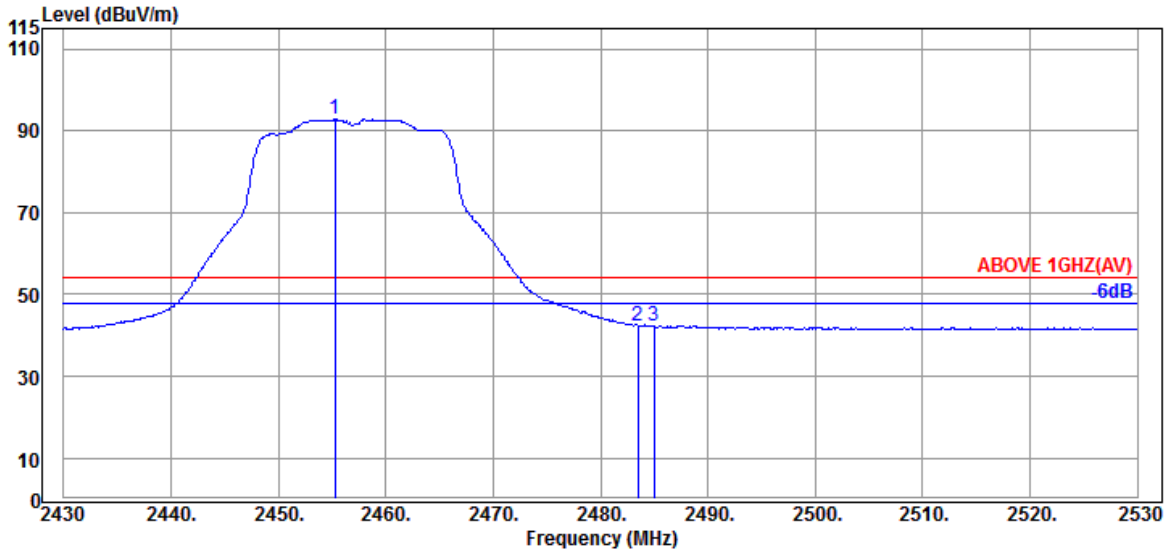


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.300	28.41	5.83	39.92	98.47	92.79	---	---	Average
2483.500	28.47	5.87	39.92	47.95	42.37	54.00	11.63	Average
2485.000	28.47	5.87	39.92	47.92	42.34	54.00	11.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

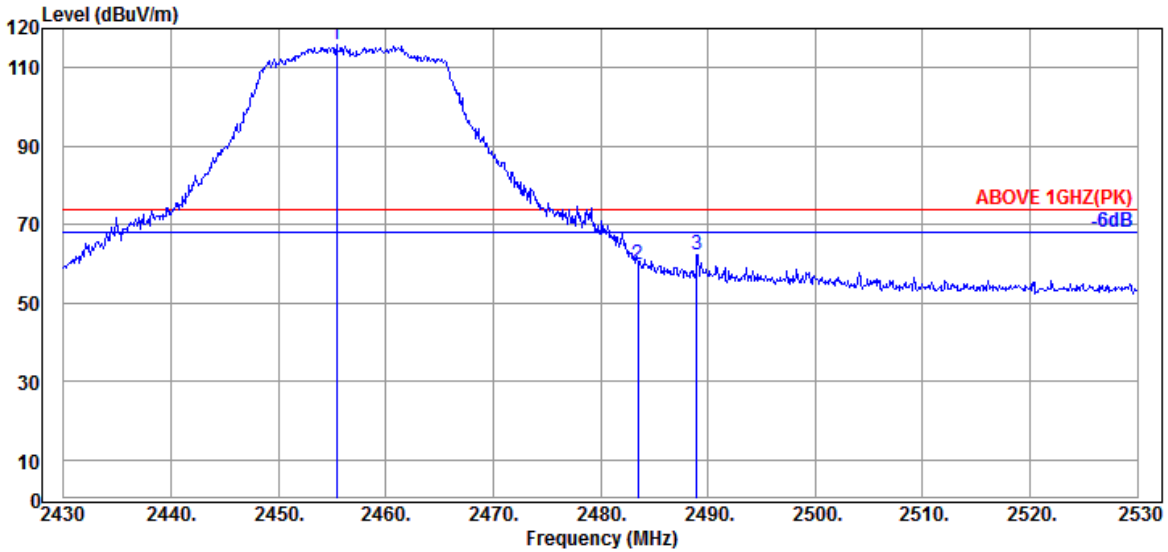

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.400	28.41	5.83	39.92	121.37	115.69	---	---	Peak
2483.500	28.47	5.87	39.92	65.47	59.89	74.00	14.11	Peak
2489.000	28.47	5.87	39.92	67.85	62.27	74.00	11.73	Peak

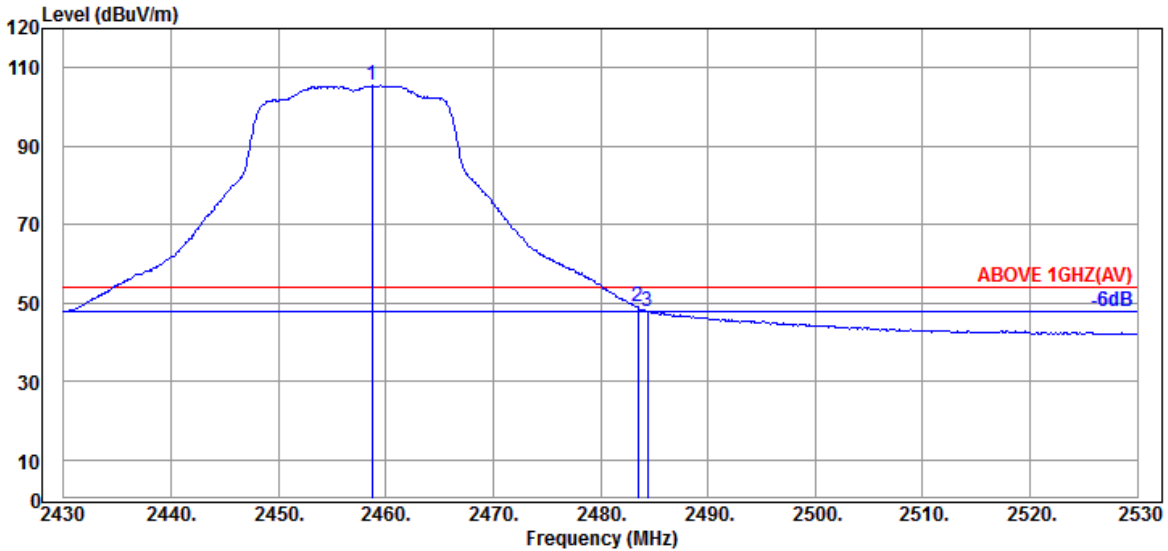


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.41	5.83	39.92	111.05	105.37	---	---	Average
2483.500	28.47	5.87	39.92	54.52	48.94	54.00	5.06	Average
2484.400	28.47	5.87	39.92	53.39	47.81	54.00	6.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

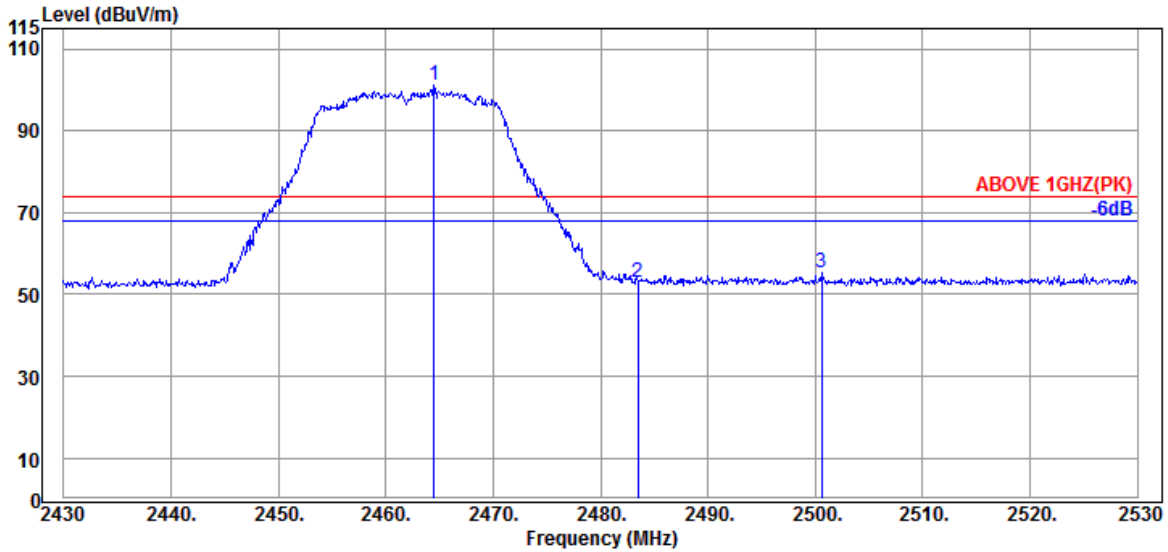

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	5.84	39.92	106.78	101.13	---	---	Peak
2483.500	28.47	5.87	39.92	58.48	52.90	74.00	21.10	Peak
2500.600	28.50	5.89	39.92	60.69	55.16	74.00	18.84	Peak

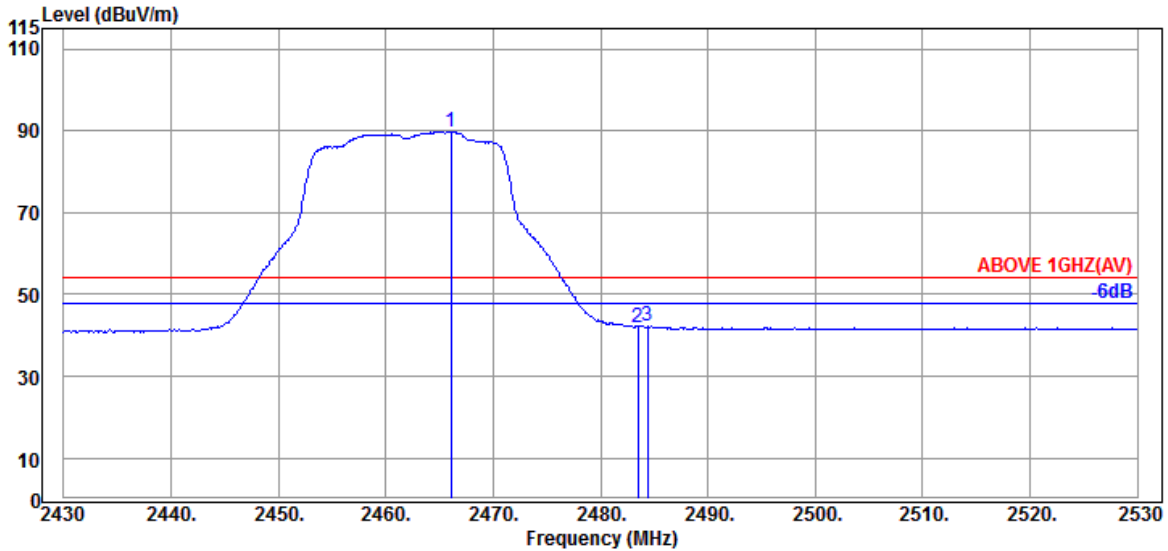


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.43	5.84	39.92	95.42	89.77	---	---	Average
2483.500	28.47	5.87	39.92	47.66	42.08	54.00	11.92	Average
2484.400	28.47	5.87	39.92	47.79	42.21	54.00	11.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

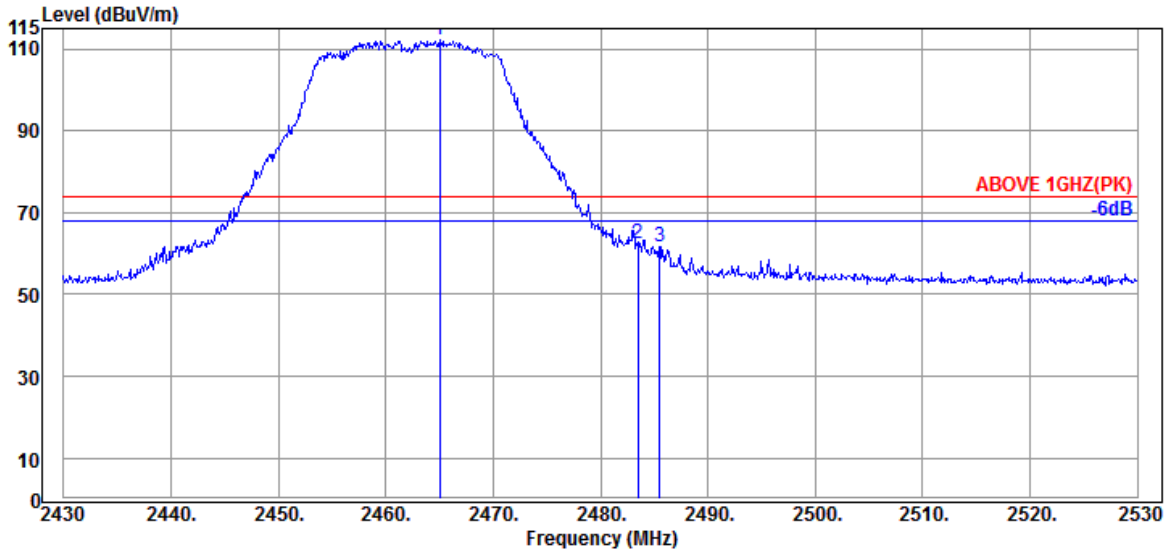

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	5.84	39.92	117.77	112.12	---	---	Peak
2483.500	28.47	5.87	39.92	67.98	62.40	74.00	11.60	Peak
2485.500	28.47	5.87	39.92	67.38	61.80	74.00	12.20	Peak

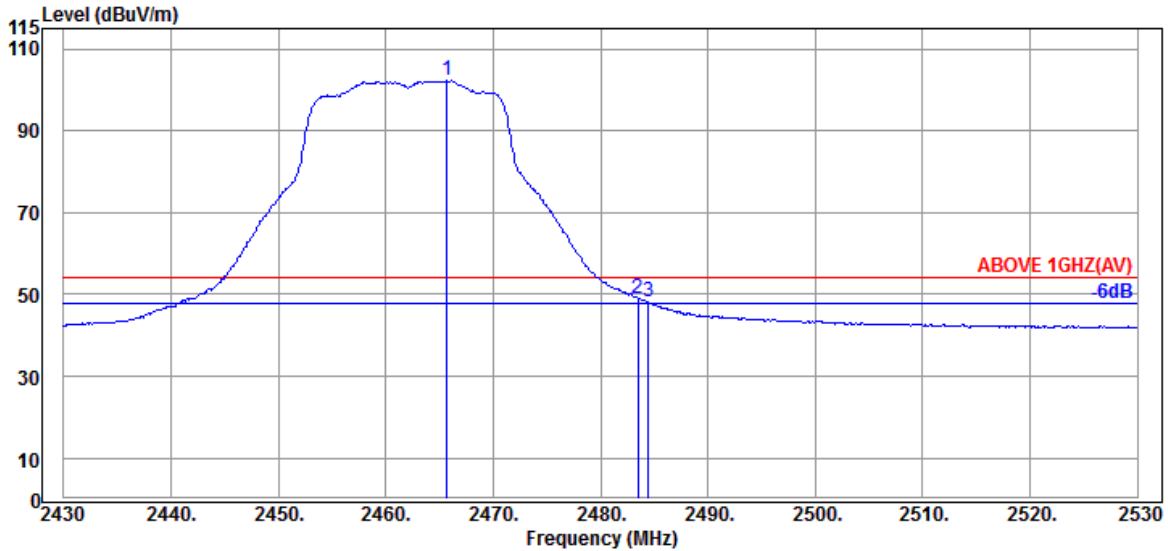


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.43	5.84	39.92	107.86	102.21	---	---	Average
2483.500	28.47	5.87	39.92	54.56	48.98	54.00	5.02	Average
2484.500	28.47	5.87	39.92	53.71	48.13	54.00	5.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

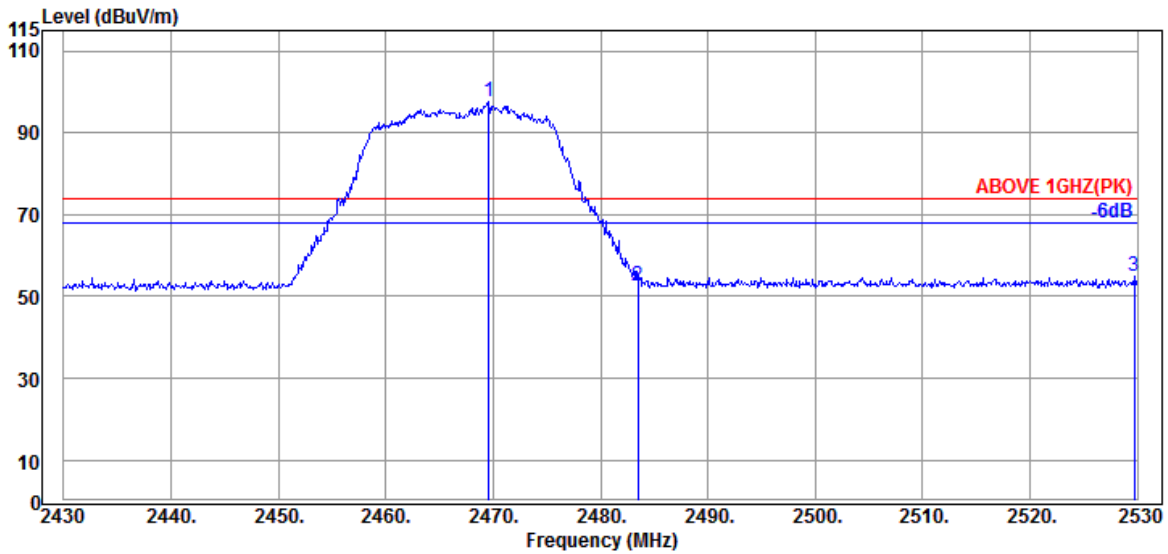

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.600	28.44	5.85	39.92	103.31	97.68	---	---	Peak
2483.500	28.47	5.87	39.92	58.33	52.75	74.00	21.25	Peak
2529.700	28.67	5.96	39.93	60.14	54.84	74.00	19.16	Peak

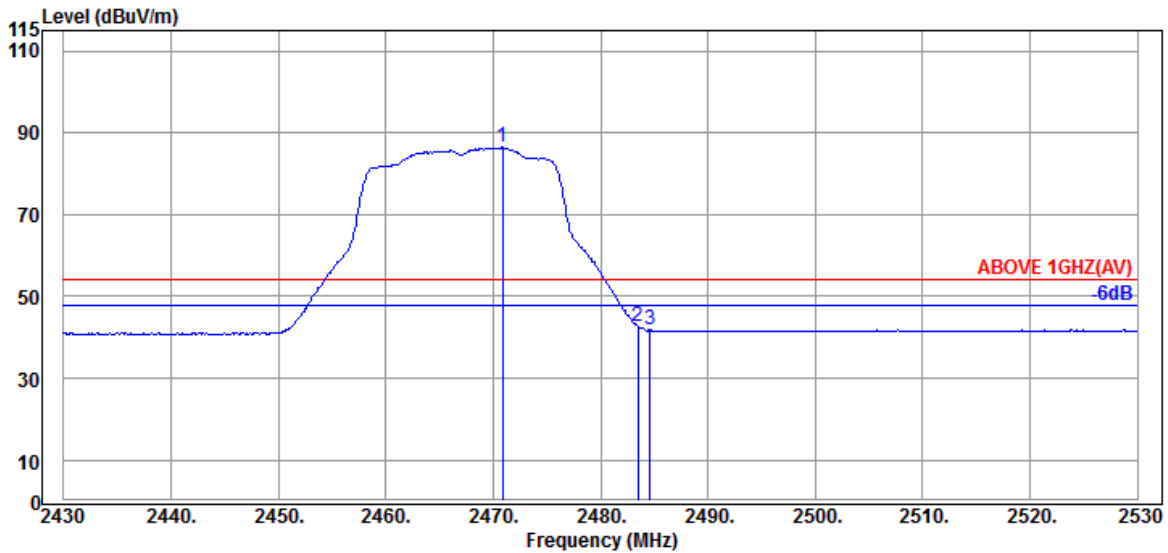


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.900	28.44	5.85	39.92	92.06	86.43	---	---	Average
2483.500	28.47	5.87	39.92	48.30	42.72	54.00	11.28	Average
2484.600	28.47	5.87	39.92	47.45	41.87	54.00	12.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

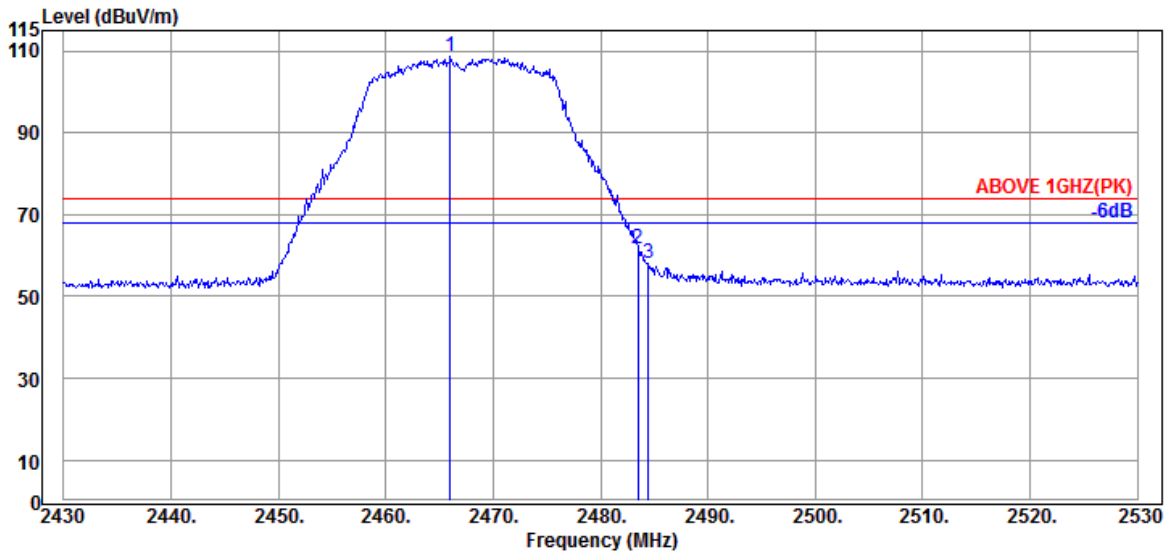

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.43	5.84	39.92	114.36	108.71	---	---	Peak
2483.500	28.47	5.87	39.92	67.31	61.73	74.00	12.27	Peak
2484.500	28.47	5.87	39.92	63.85	58.27	74.00	15.73	Peak

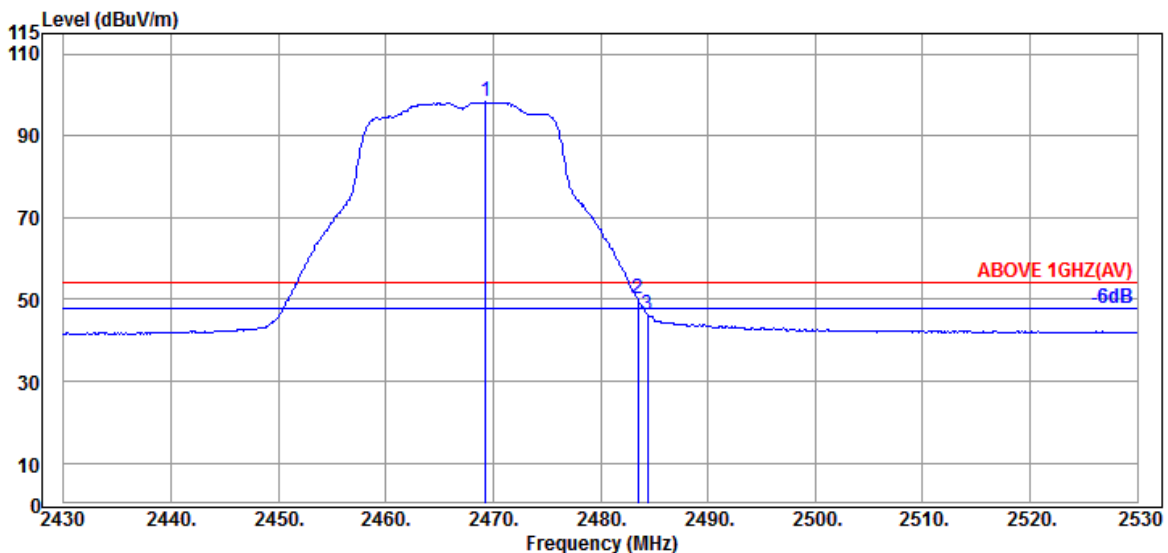


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	5.85	39.92	103.95	98.32	---	---	Average
2483.500	28.47	5.87	39.92	55.81	50.23	54.00	3.77	Average
2484.400	28.47	5.87	39.92	51.81	46.23	54.00	7.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

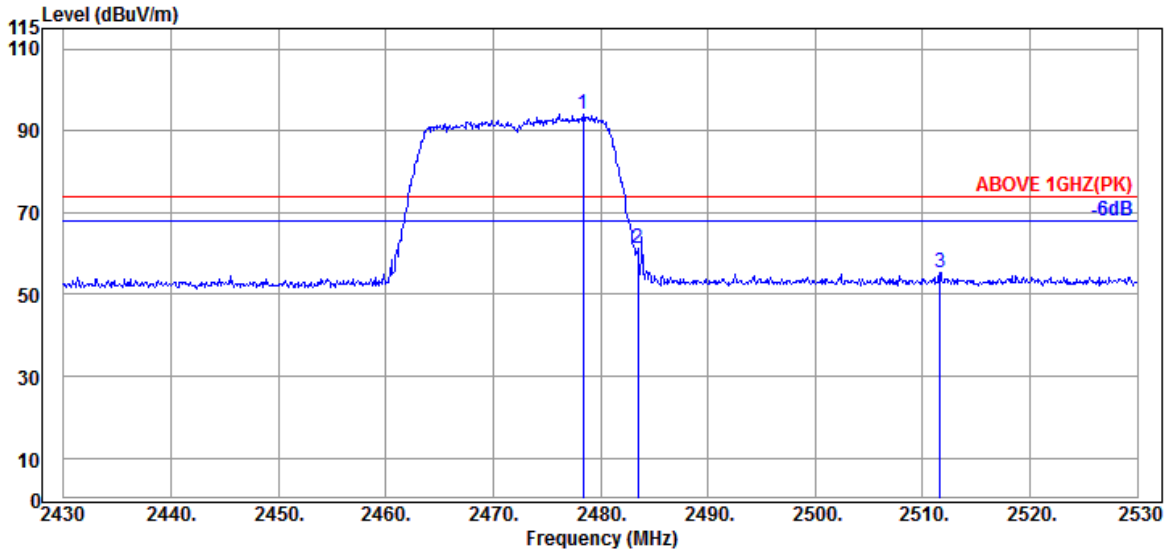

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	5.86	39.92	99.62	94.02	---	---	Peak
2483.500	28.47	5.87	39.92	66.88	61.30	74.00	12.70	Peak
2511.600	28.59	5.93	39.92	60.76	55.36	74.00	18.64	Peak

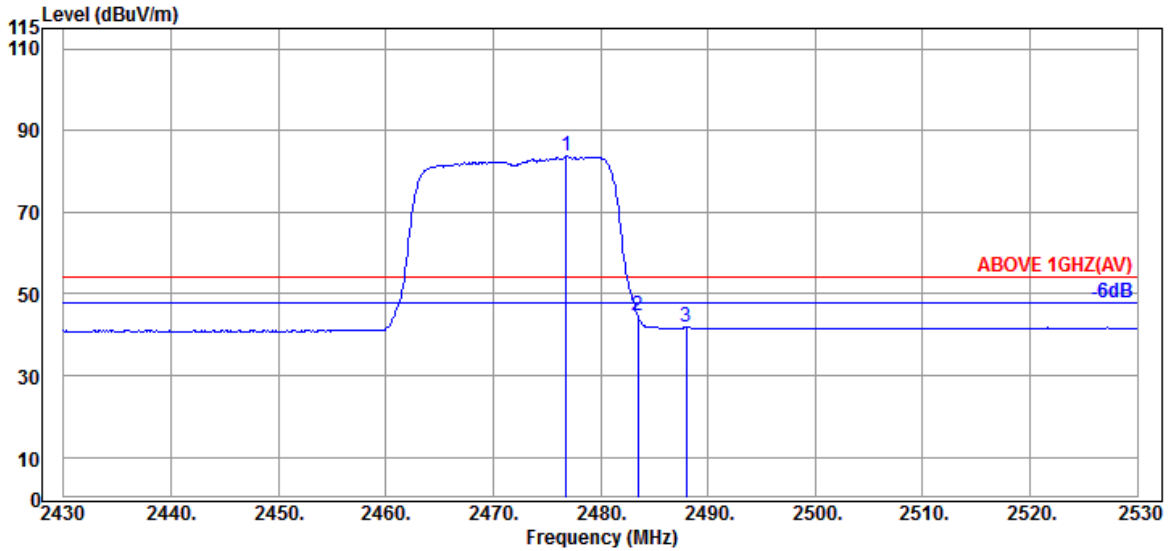


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.800	28.46	5.86	39.92	89.20	83.60	---	---	Average
2483.500	28.47	5.87	39.92	50.39	44.81	54.00	9.19	Average
2488.000	28.47	5.87	39.92	47.57	41.99	54.00	12.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

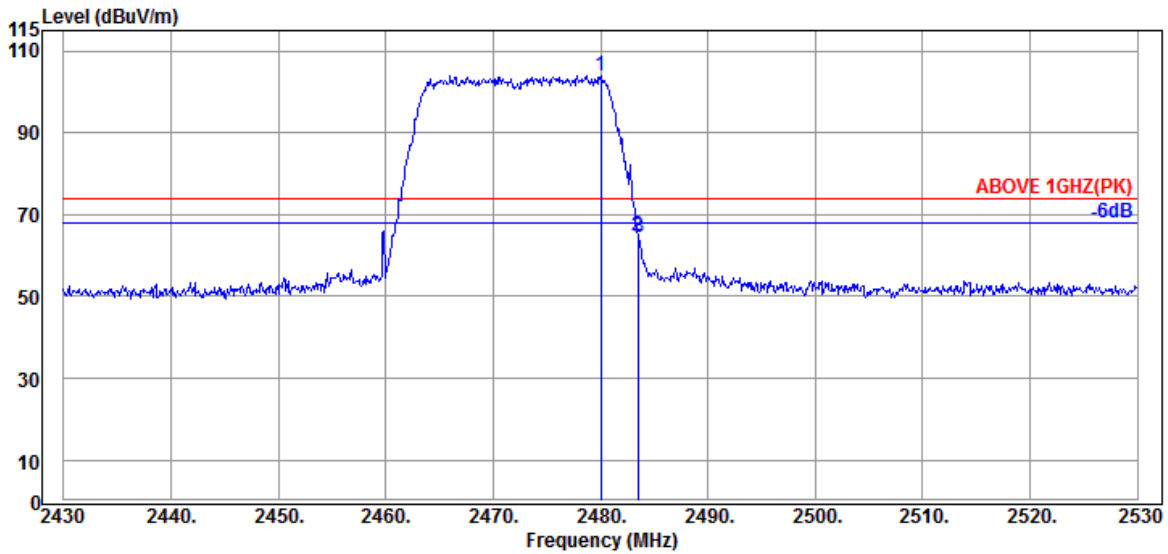

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	109.62	104.02	---	---	Peak
2483.500	28.47	5.87	39.92	70.46	64.88	74.00	9.12	Peak
2483.600	28.47	5.87	39.92	69.83	64.25	74.00	9.75	Peak

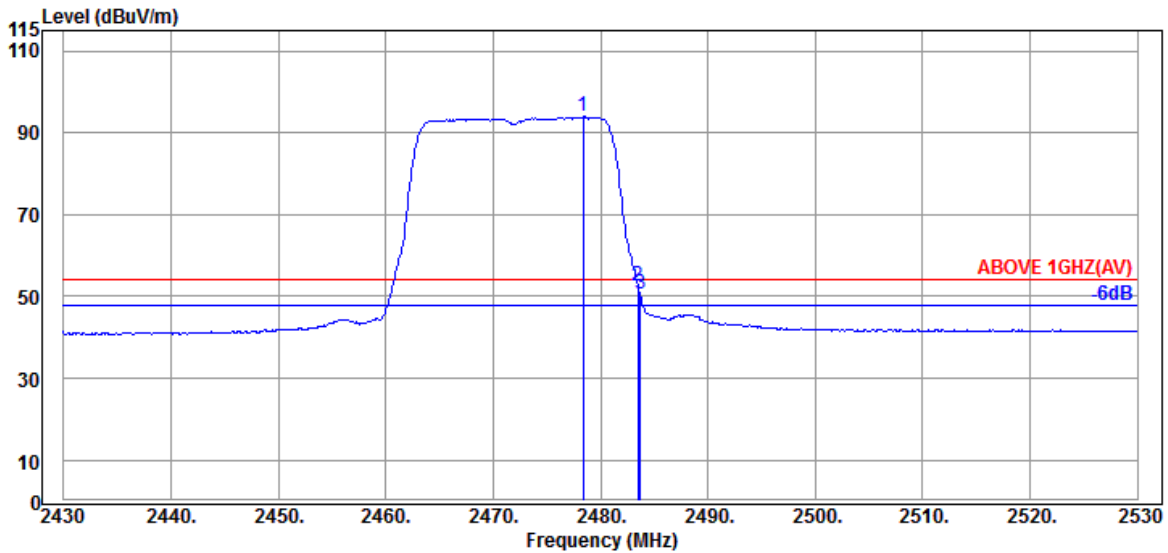


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	5.86	39.92	99.48	93.88	---	---	Average
2483.500	28.47	5.87	39.92	58.08	52.50	54.00	1.50	Average
2483.700	28.47	5.87	39.92	56.27	50.69	54.00	3.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

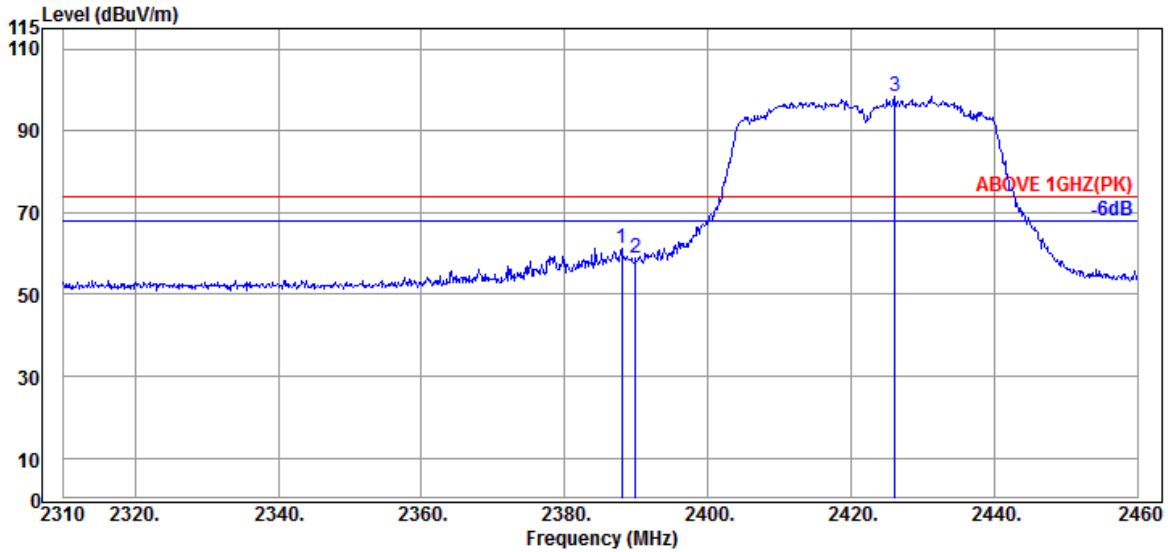

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2388.000	28.21	5.72	39.93	67.28	61.28	74.00	12.72	Peak
2389.950	28.21	5.72	39.93	64.76	58.76	74.00	15.24	Peak
@ 2426.100	28.27	5.78	39.93	104.14	98.26	---	---	Peak

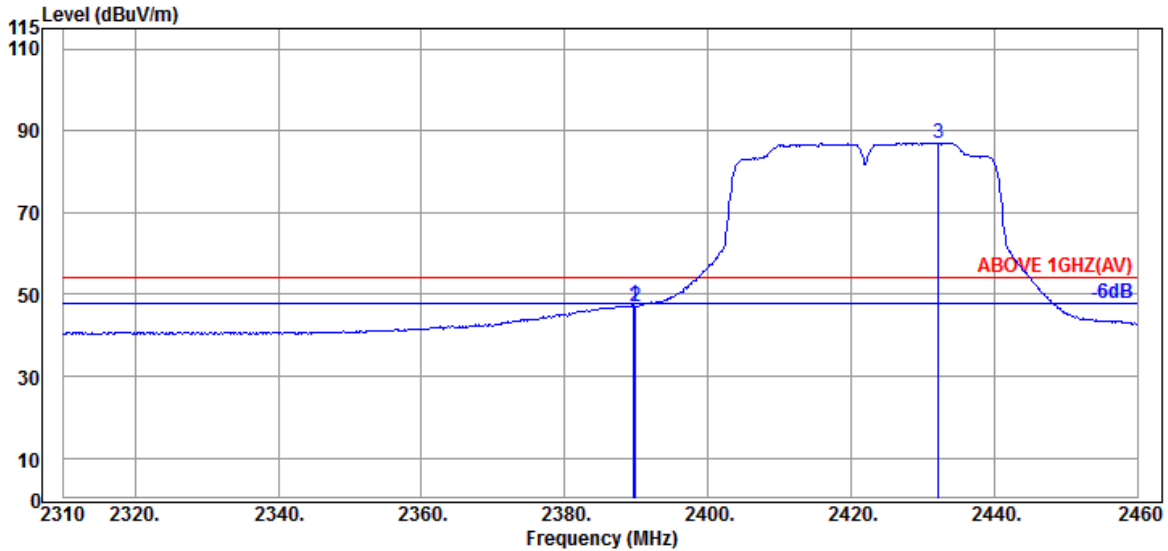


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	53.41	47.41	54.00	6.59	Average
2389.950	28.21	5.72	39.93	53.04	47.04	54.00	6.96	Average
@ 2432.250	28.31	5.79	39.93	92.90	87.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

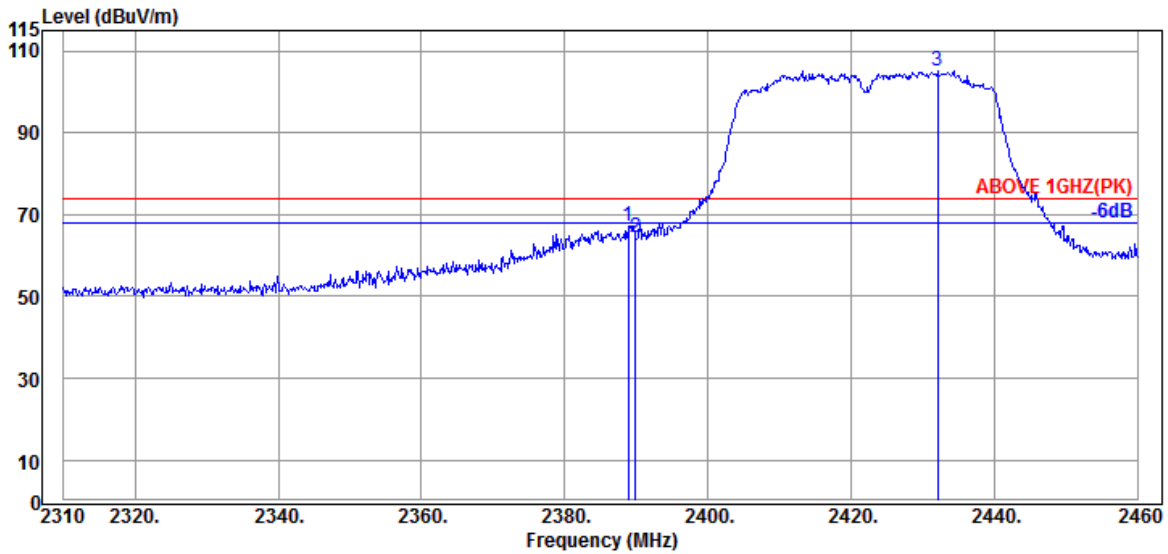

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.21	5.72	39.93	73.27	67.27	74.00	6.73	Peak
2389.950	28.21	5.72	39.93	70.45	64.45	74.00	9.55	Peak
@ 2432.100	28.27	5.78	39.93	111.13	105.25	---	---	Peak

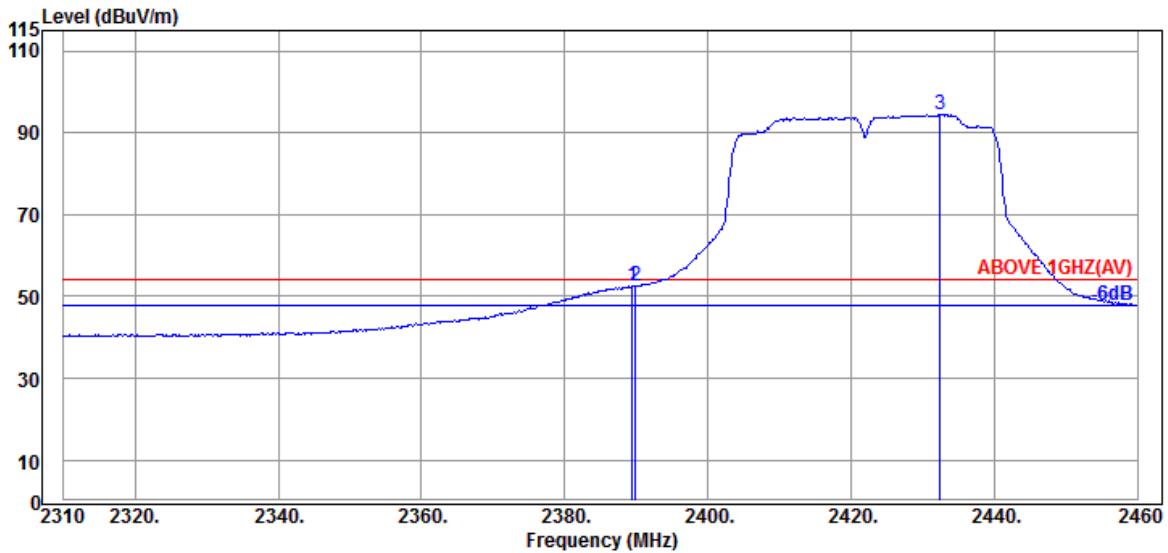


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.21	5.72	39.93	58.49	52.49	54.00	1.51	Average
2389.950	28.21	5.72	39.93	58.44	52.44	54.00	1.56	Average
@ 2432.400	28.31	5.79	39.93	100.21	94.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

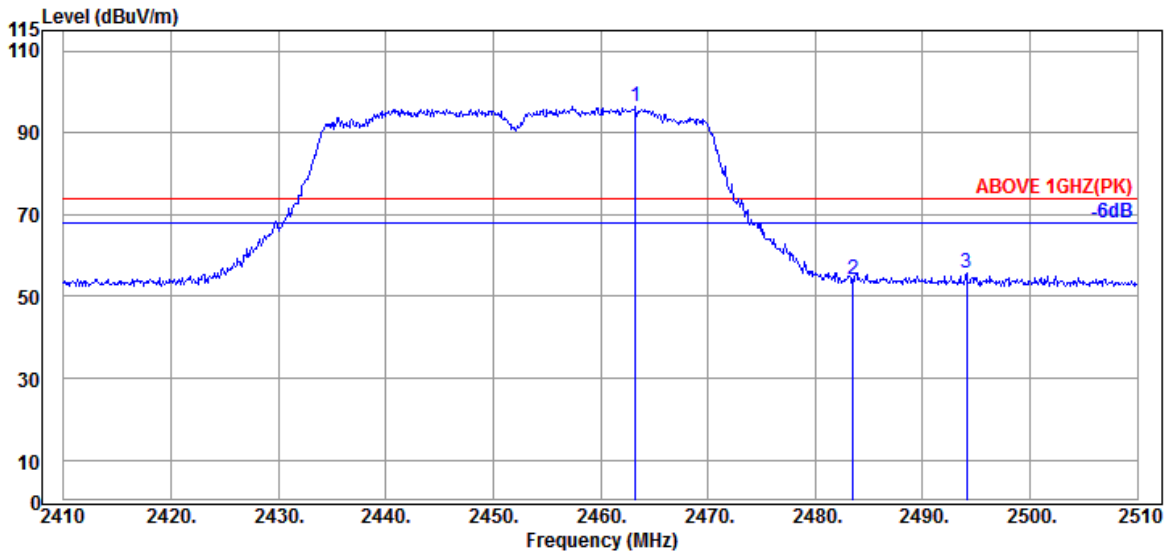

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.43	5.84	39.92	102.18	96.53	---	---	Peak
2483.500	28.47	5.87	39.92	59.68	54.10	74.00	19.90	Peak
2494.100	28.49	5.88	39.92	61.23	55.68	74.00	18.32	Peak

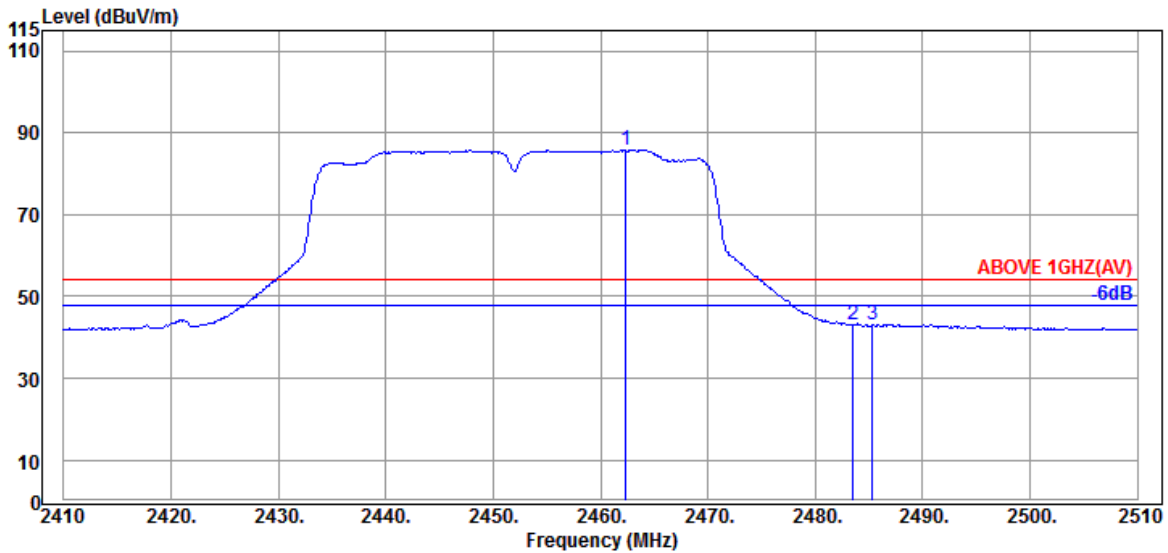


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	28.43	5.84	39.92	91.46	85.81	---	---	Average
2483.500	28.47	5.87	39.92	48.67	43.09	54.00	10.91	Average
2485.300	28.47	5.87	39.92	48.65	43.07	54.00	10.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

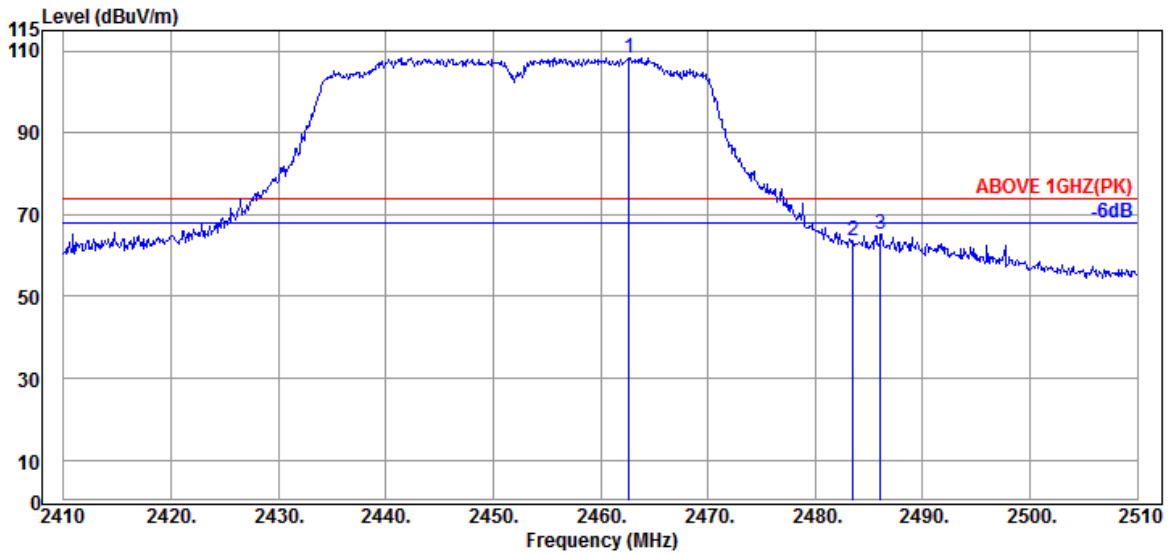

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	28.43	5.84	39.92	113.96	108.31	---	---	Peak
2483.500	28.47	5.87	39.92	69.06	63.48	74.00	10.52	Peak
2486.100	28.47	5.87	39.92	70.98	65.40	74.00	8.60	Peak

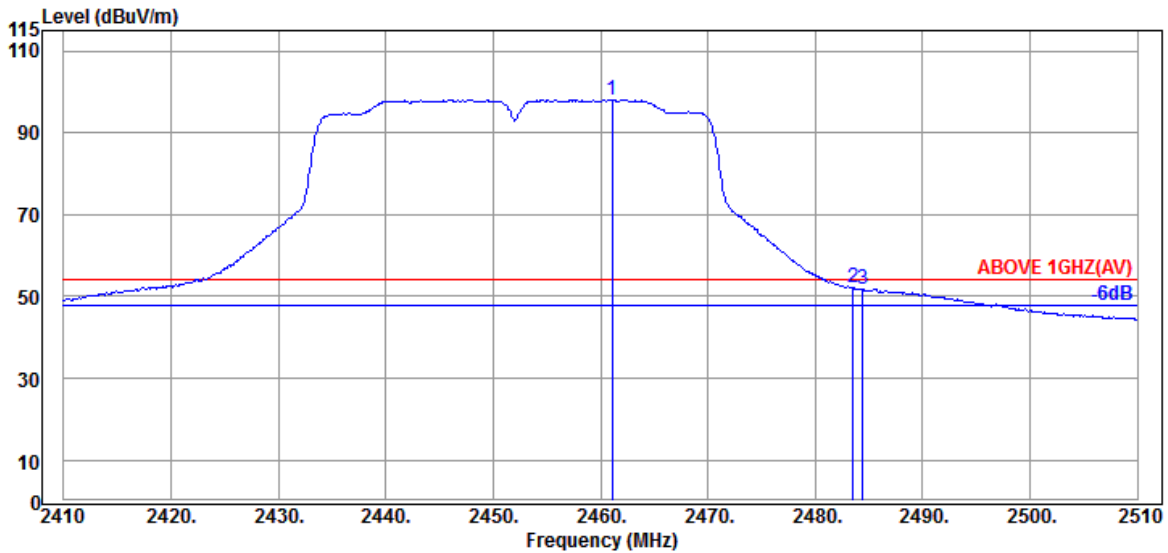


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.100	28.43	5.84	39.92	103.80	98.15	---	---	Average
2483.500	28.47	5.87	39.92	57.87	52.29	54.00	1.71	Average
2484.400	28.47	5.87	39.92	57.37	51.79	54.00	2.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

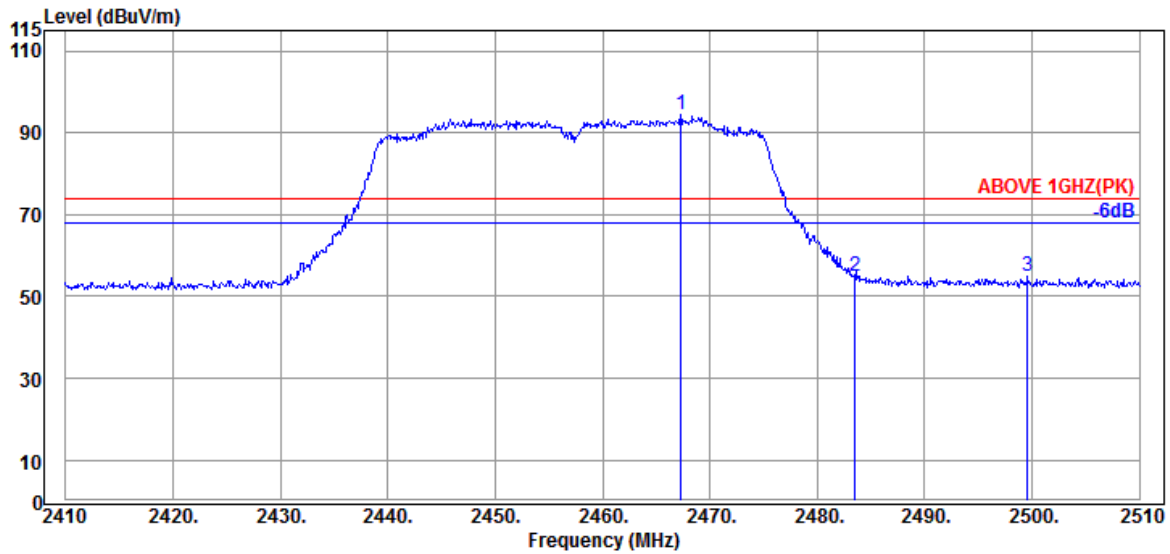

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	28.43	5.84	39.92	99.94	94.29	---	---	Peak
2483.500	28.47	5.87	39.92	60.40	54.82	74.00	19.18	Peak
2499.600	28.50	5.89	39.92	60.34	54.81	74.00	19.19	Peak

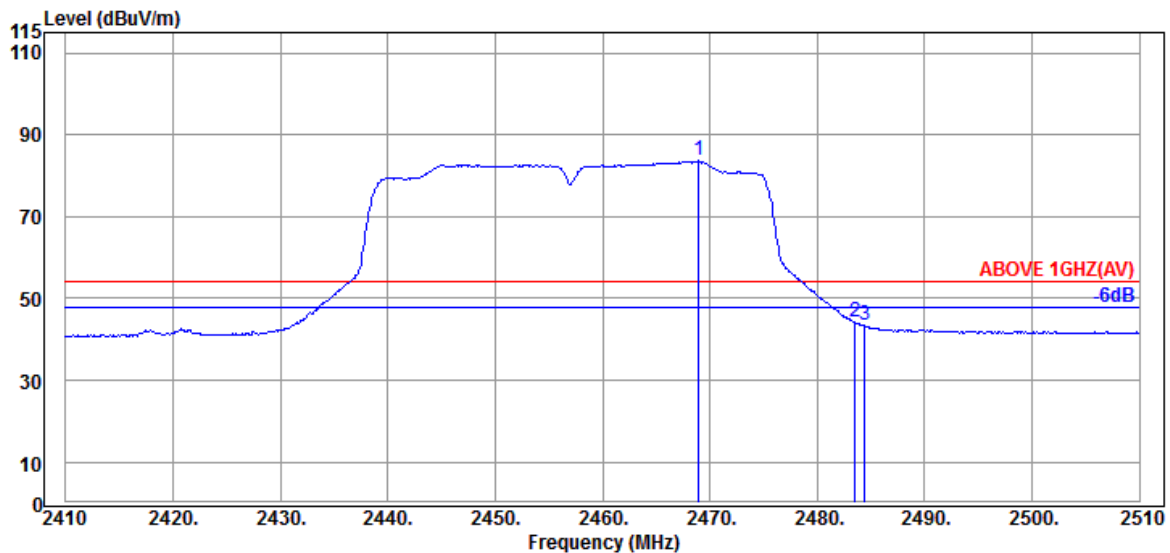


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.44	5.85	39.92	89.31	83.68	---	---	Average
2483.500	28.47	5.87	39.92	49.80	44.22	54.00	9.78	Average
2484.400	28.47	5.87	39.92	48.95	43.37	54.00	10.63	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

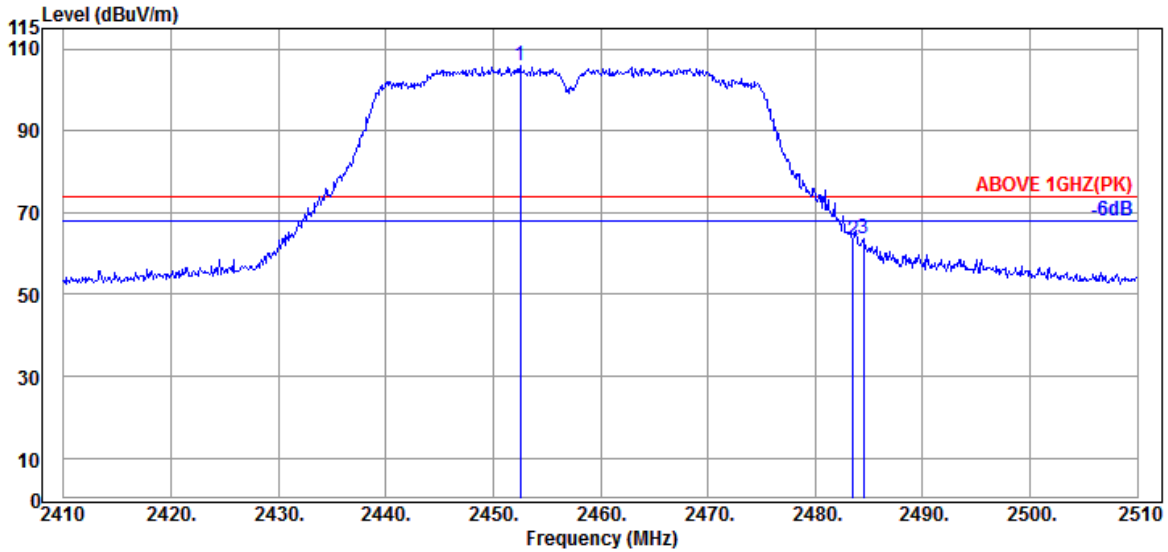

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.500	28.40	5.81	39.92	111.58	105.87	---	---	Peak
2483.500	28.47	5.87	39.92	68.63	63.05	74.00	10.95	Peak
2484.500	28.47	5.87	39.92	69.32	63.74	74.00	10.26	Peak

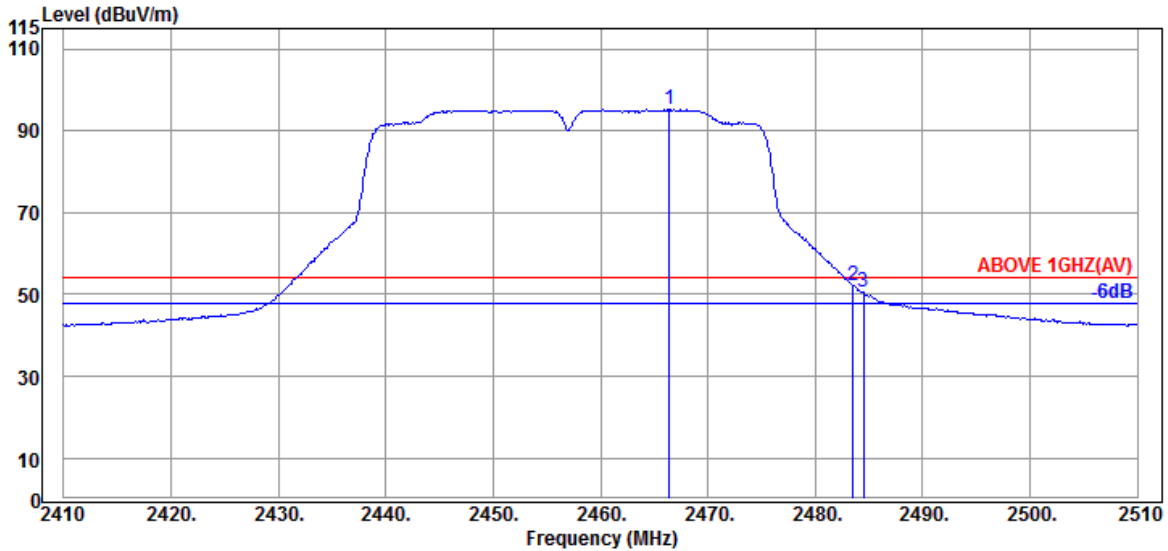


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	5.84	39.92	100.80	95.15	---	---	Average
2483.500	28.47	5.87	39.92	57.84	52.26	54.00	1.74	Average
2484.500	28.47	5.87	39.92	56.06	50.48	54.00	3.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

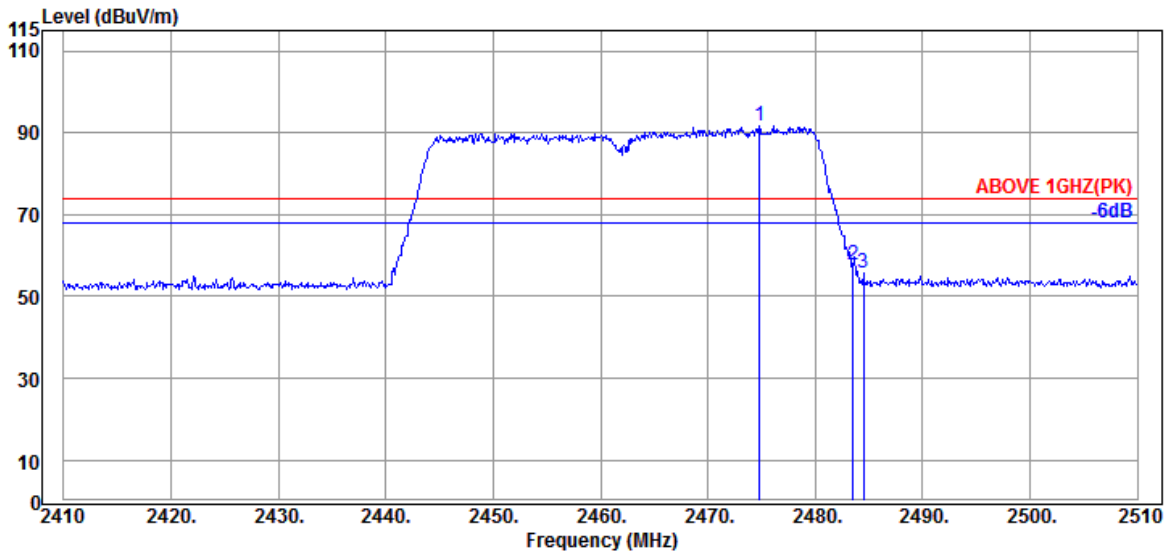

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.800	28.46	5.86	39.92	97.44	91.84	---	---	Peak
2483.500	28.47	5.87	39.92	63.44	57.86	74.00	16.14	Peak
2484.500	28.47	5.87	39.92	61.27	55.69	74.00	18.31	Peak

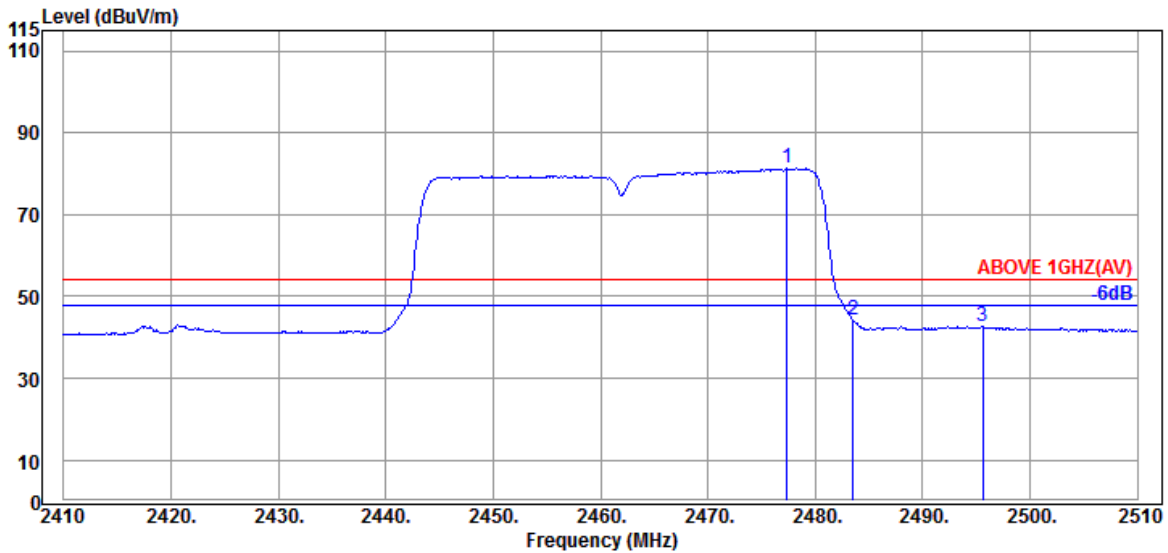


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.400	28.46	5.86	39.92	86.83	81.23	---	---	Average
2483.500	28.47	5.87	39.92	49.96	44.38	54.00	9.62	Average
2495.600	28.49	5.88	39.92	48.18	42.63	54.00	11.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

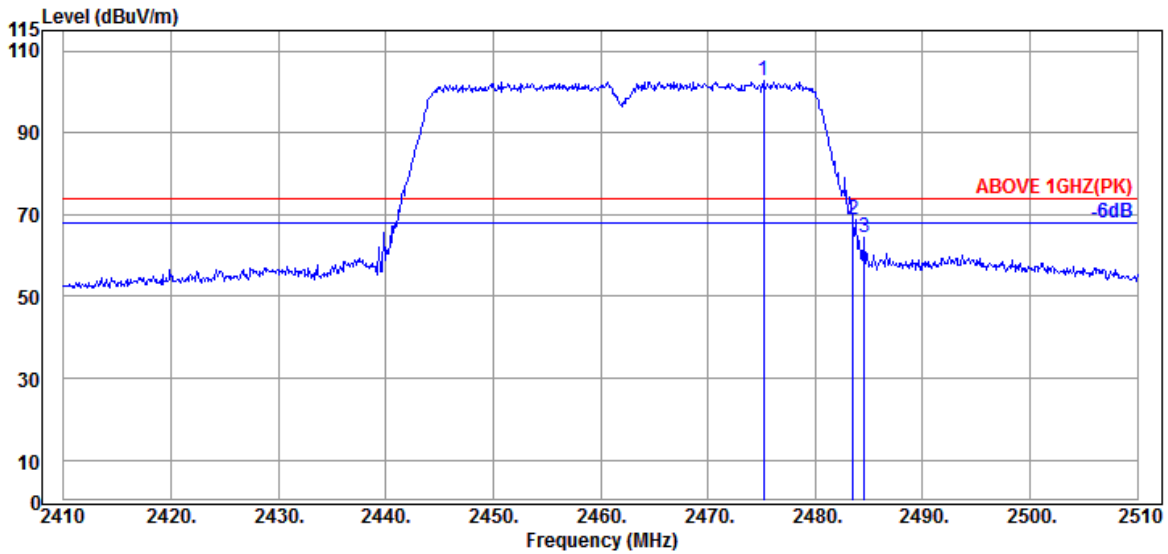

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	28.46	5.86	39.92	108.48	102.88	---	---	Peak
2483.500	28.47	5.87	39.92	74.49	68.91	74.00	5.09	Peak
2484.600	28.47	5.87	39.92	69.89	64.31	74.00	9.69	Peak

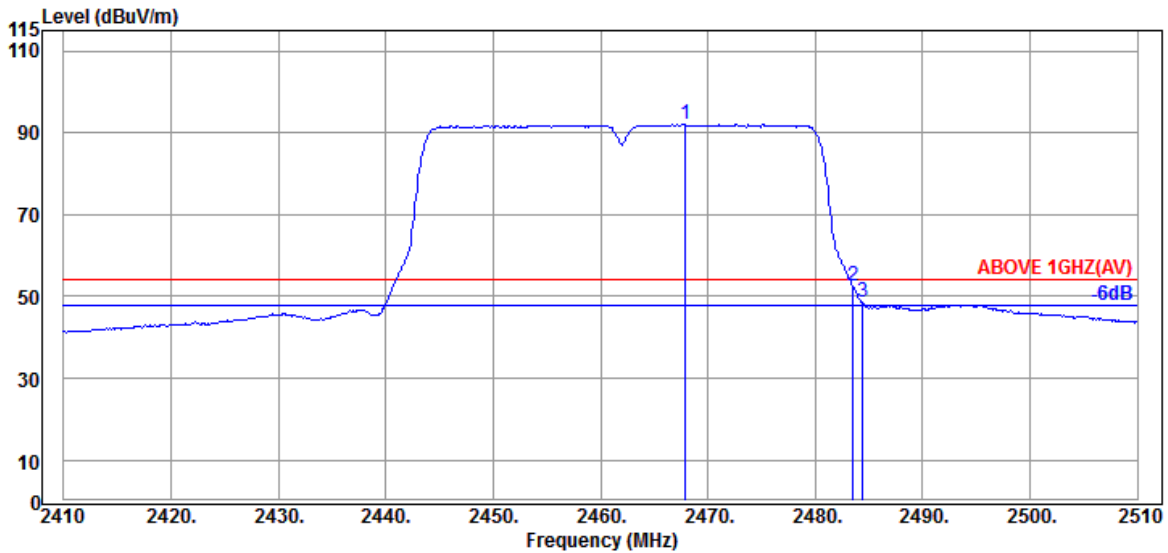


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.44	5.85	39.92	97.66	92.03	---	---	Average
2483.500	28.47	5.87	39.92	58.08	52.50	54.00	1.50	Average
2484.400	28.47	5.87	39.92	54.04	48.46	54.00	5.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

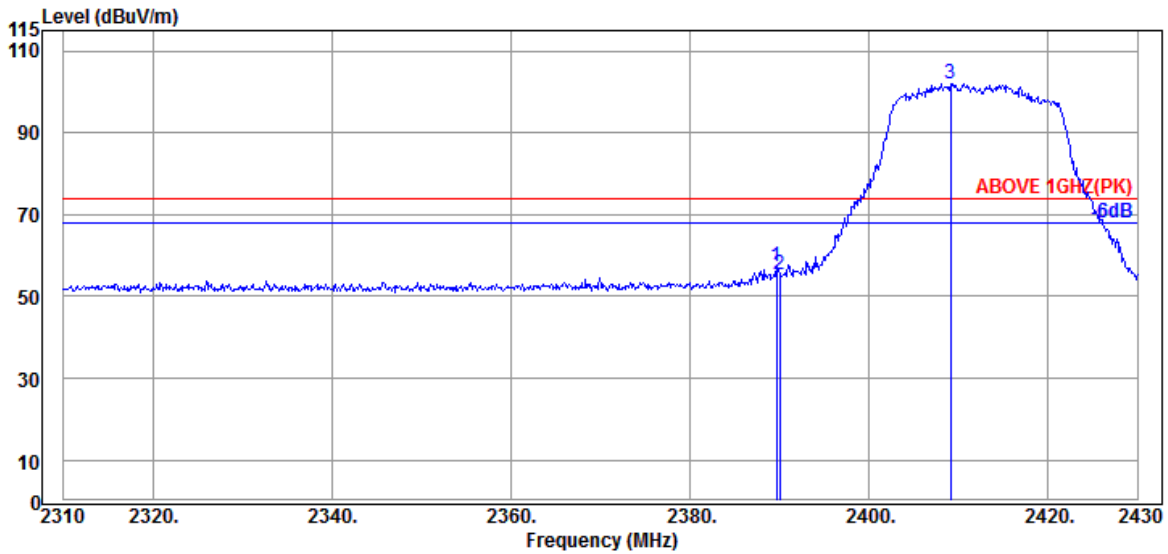

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	63.40	57.40	74.00	16.60	Peak
2390.040	28.21	5.72	39.93	61.50	55.50	74.00	18.50	Peak
@ 2409.120	28.14	5.75	39.93	108.12	102.08	---	---	Peak

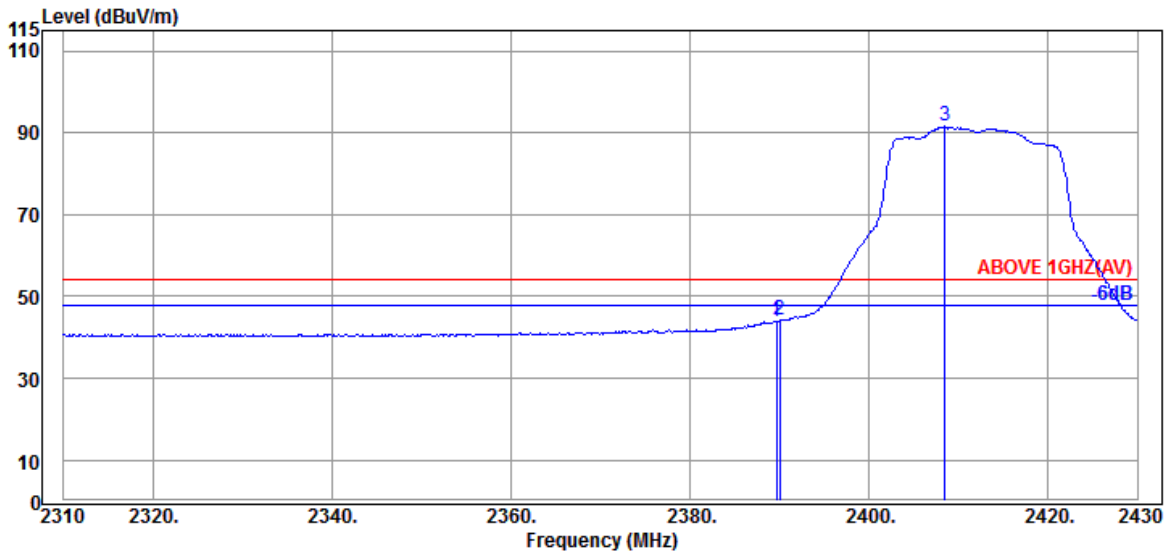


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	49.85	43.85	54.00	10.15	Average
2390.040	28.21	5.72	39.93	50.11	44.11	54.00	9.89	Average
@ 2408.520	28.14	5.75	39.93	97.54	91.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

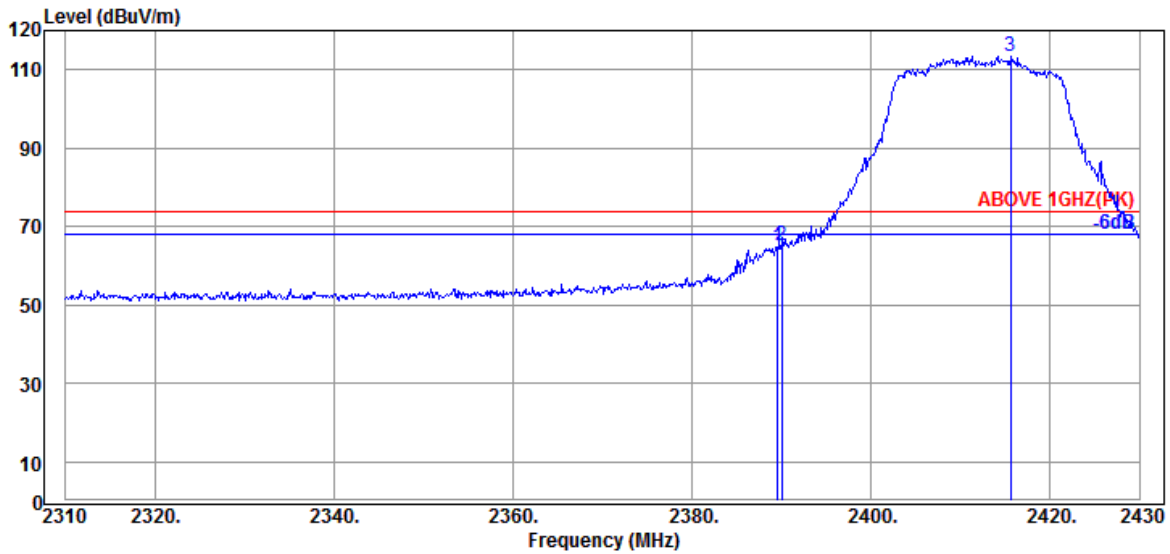

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	70.75	64.75	74.00	9.25	Peak
2390.040	28.21	5.72	39.93	71.00	65.00	74.00	9.00	Peak
@ 2415.600	28.19	5.76	39.93	119.47	113.49	---	---	Peak

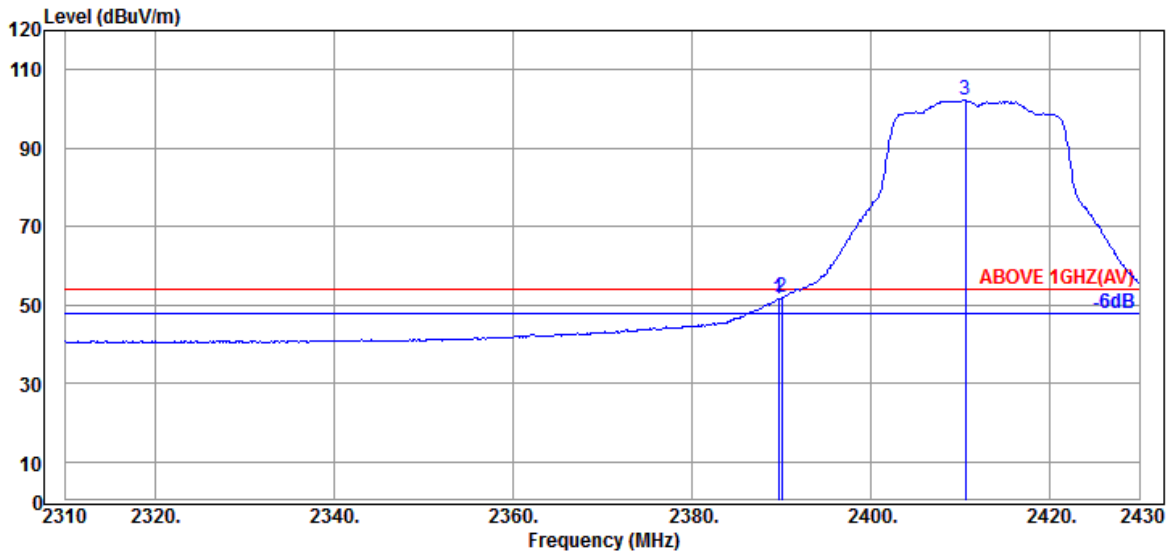


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	57.57	51.57	54.00	2.43	Average
2390.040	28.21	5.72	39.93	57.99	51.99	54.00	2.01	Average
@ 2410.560	28.14	5.75	39.93	108.15	102.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

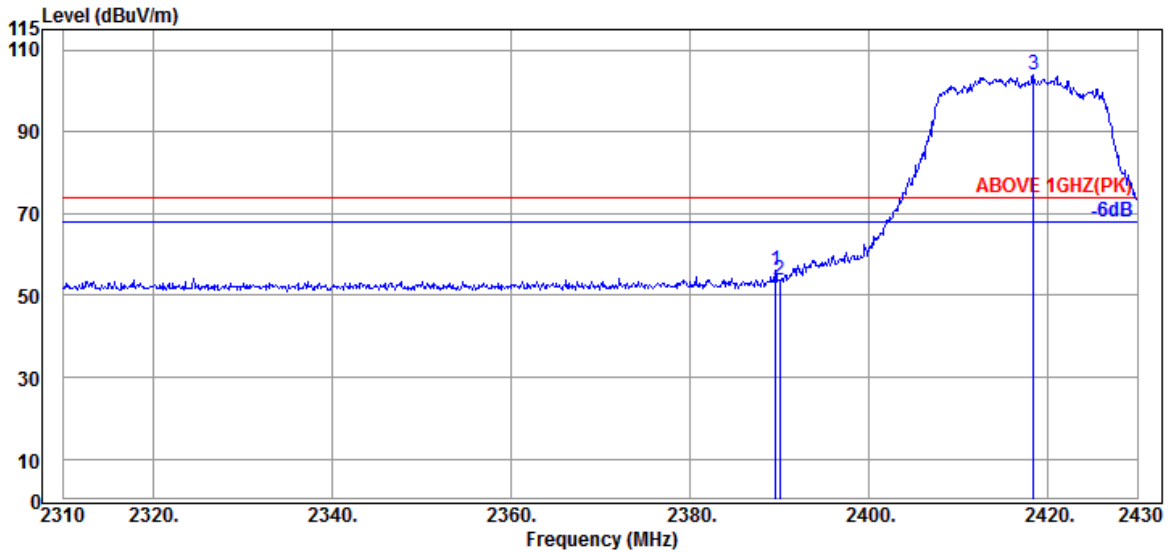

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	62.20	56.20	74.00	17.80	Peak
2390.040	28.21	5.72	39.93	59.71	53.71	74.00	20.29	Peak
@ 2418.360	28.23	5.77	39.93	109.88	103.95	---	---	Peak

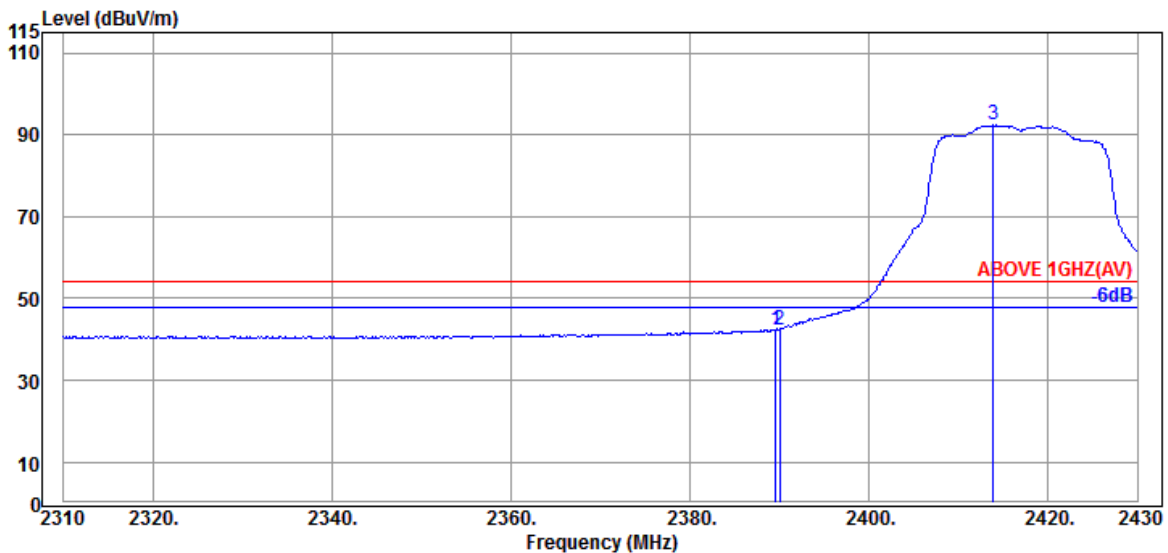


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	48.42	42.42	54.00	11.58	Average
2390.040	28.21	5.72	39.93	48.45	42.45	54.00	11.55	Average
@ 2413.920	28.19	5.76	39.93	98.36	92.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

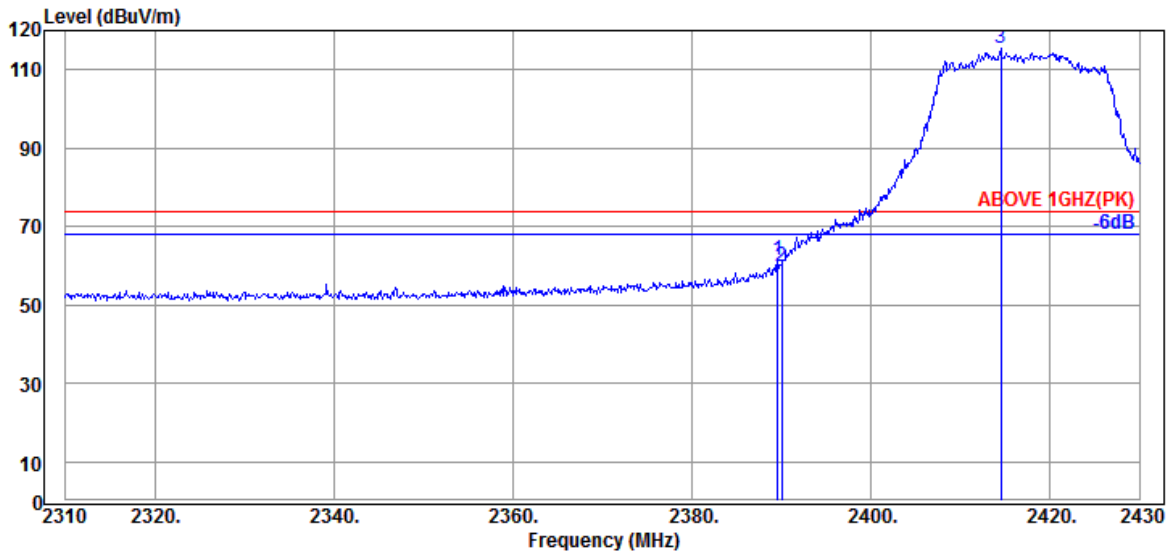

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	67.40	61.40	74.00	12.60	Peak
2390.040	28.21	5.72	39.93	65.84	59.84	74.00	14.16	Peak
@ 2414.520	28.19	5.76	39.93	121.53	115.55	---	---	Peak

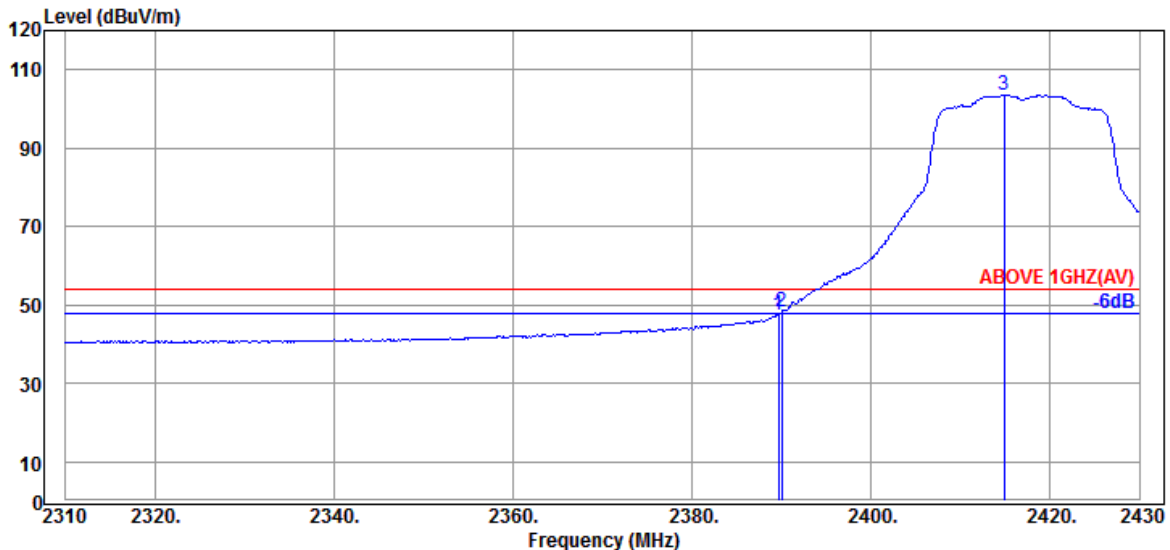


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	53.61	47.61	54.00	6.39	Average
2390.040	28.21	5.72	39.93	54.13	48.13	54.00	5.87	Average
@ 2414.880	28.19	5.76	39.93	109.47	103.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

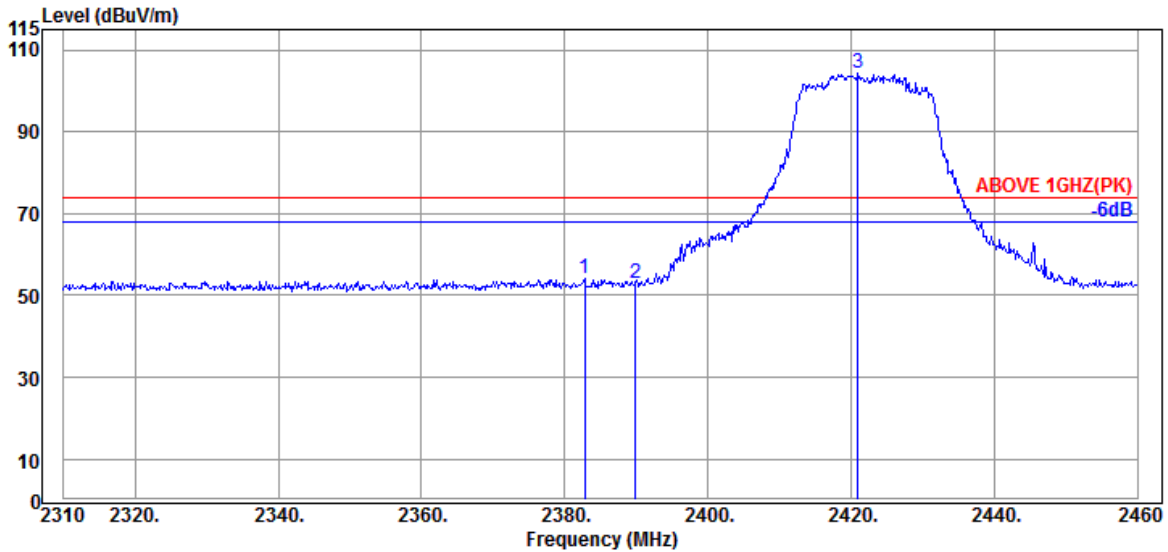

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.750	28.27	5.71	39.93	59.92	53.97	74.00	20.03	Peak
2389.950	28.21	5.72	39.93	58.78	52.78	74.00	21.22	Peak
@ 2421.000	28.23	5.77	39.93	110.22	104.29	---	---	Peak

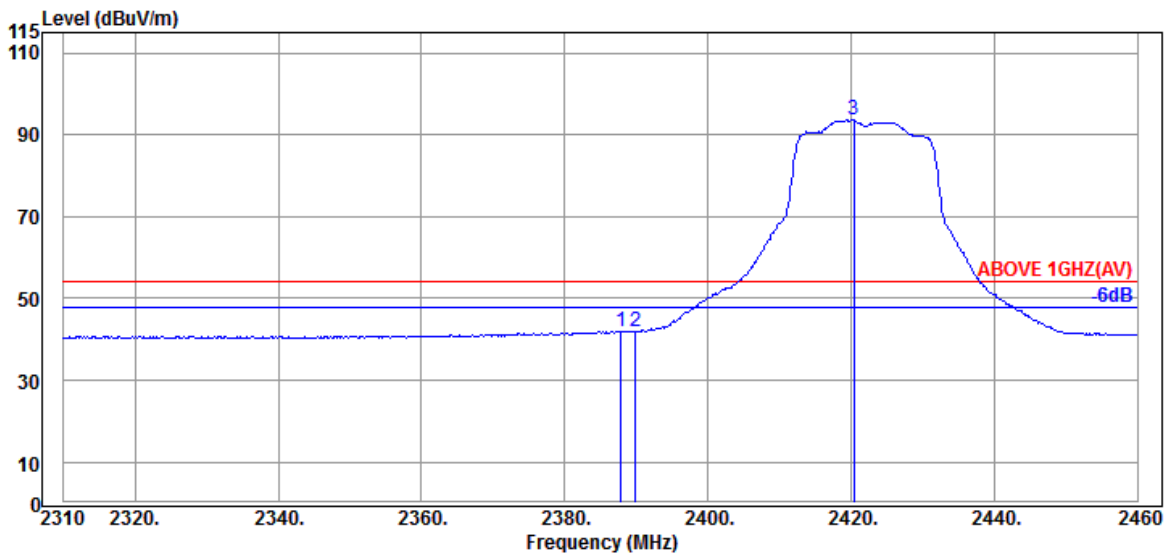


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.850	28.21	5.72	39.93	48.04	42.04	54.00	11.96	Average
2389.950	28.21	5.72	39.93	47.85	41.85	54.00	12.15	Average
@ 2420.400	28.23	5.77	39.93	99.57	93.64	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

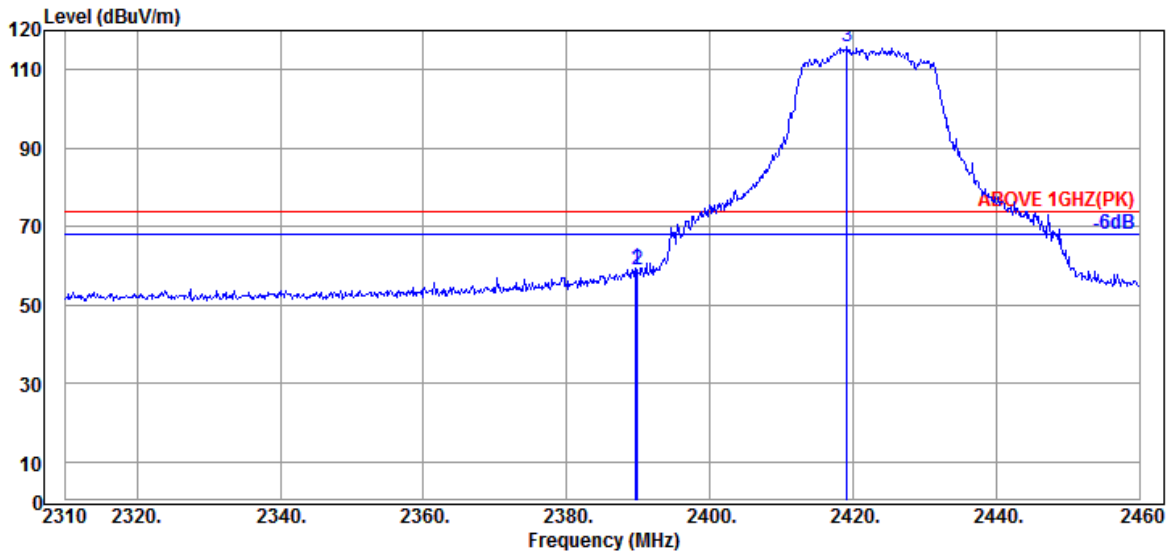

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	67.40	61.40	74.00	12.60	Peak
2390.040	28.21	5.72	39.93	65.84	59.84	74.00	14.16	Peak
@ 2414.520	28.19	5.76	39.93	121.53	115.55	---	---	Peak

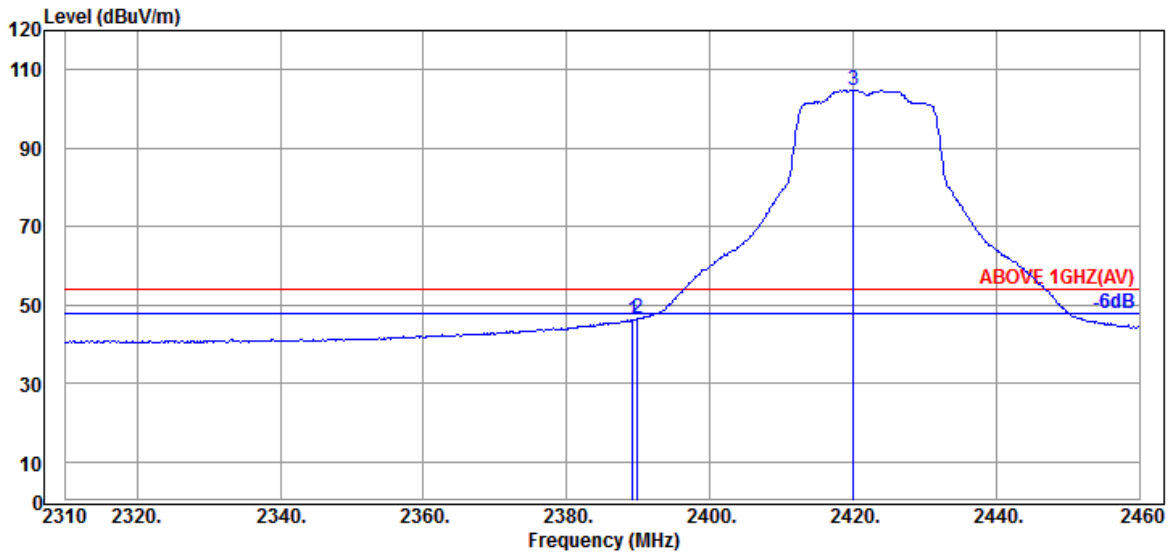


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.21	5.72	39.93	52.20	46.20	54.00	7.80	Average
2389.950	28.21	5.72	39.93	52.42	46.42	54.00	7.58	Average
@ 2420.100	28.23	5.77	39.93	110.67	104.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

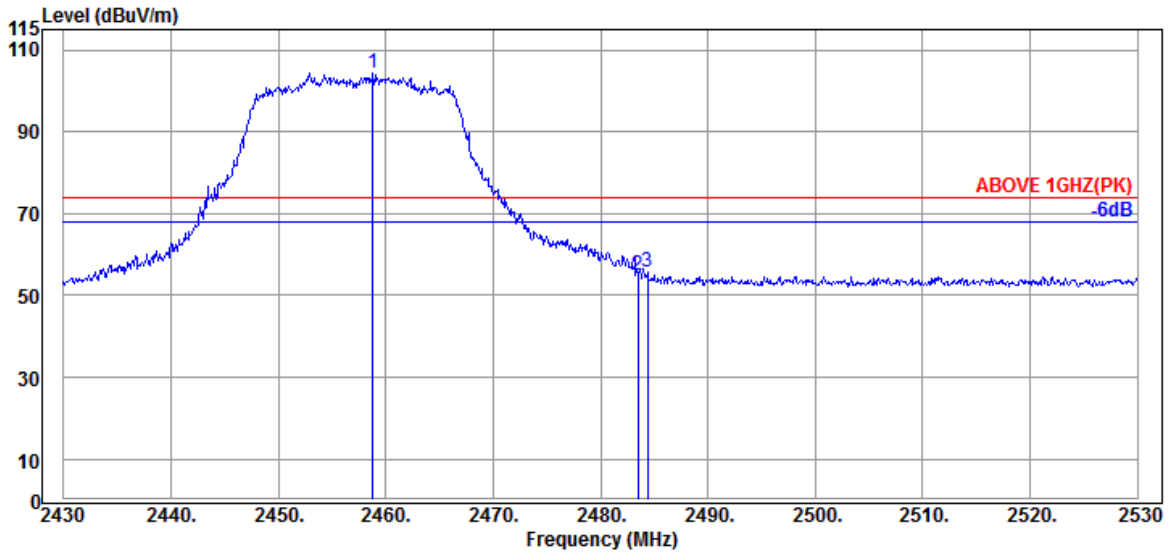

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.800	28.41	5.83	39.92	110.01	104.33	---	---	Peak
2483.500	28.47	5.87	39.92	60.58	55.00	74.00	19.00	Peak
2484.400	28.47	5.87	39.92	61.36	55.78	74.00	18.22	Peak

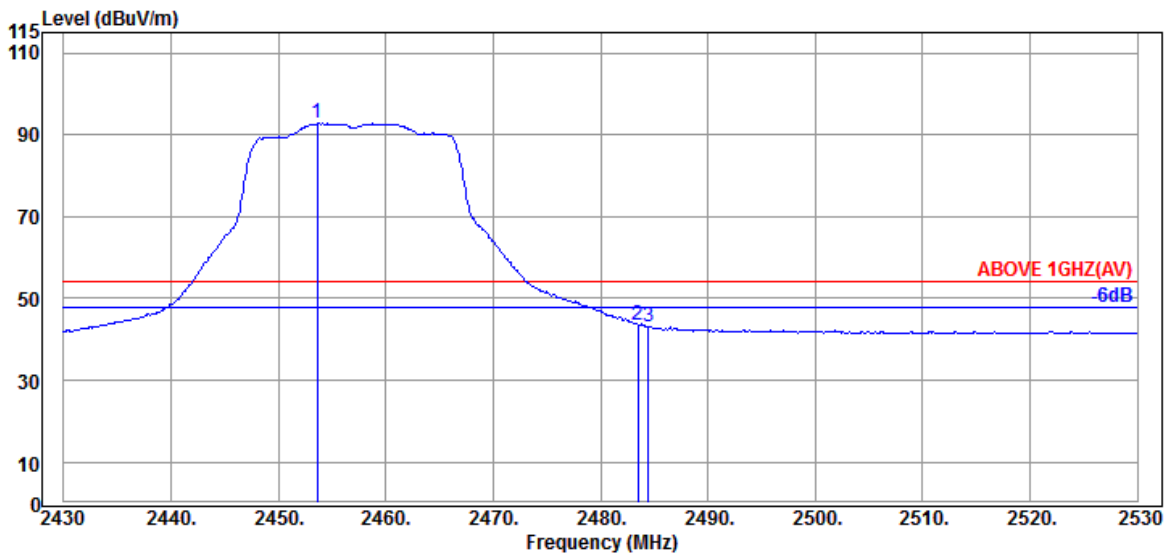


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.600	28.41	5.83	39.92	98.53	92.85	---	---	Average
2483.500	28.47	5.87	39.92	49.16	43.58	54.00	10.42	Average
2484.500	28.47	5.87	39.92	48.77	43.19	54.00	10.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

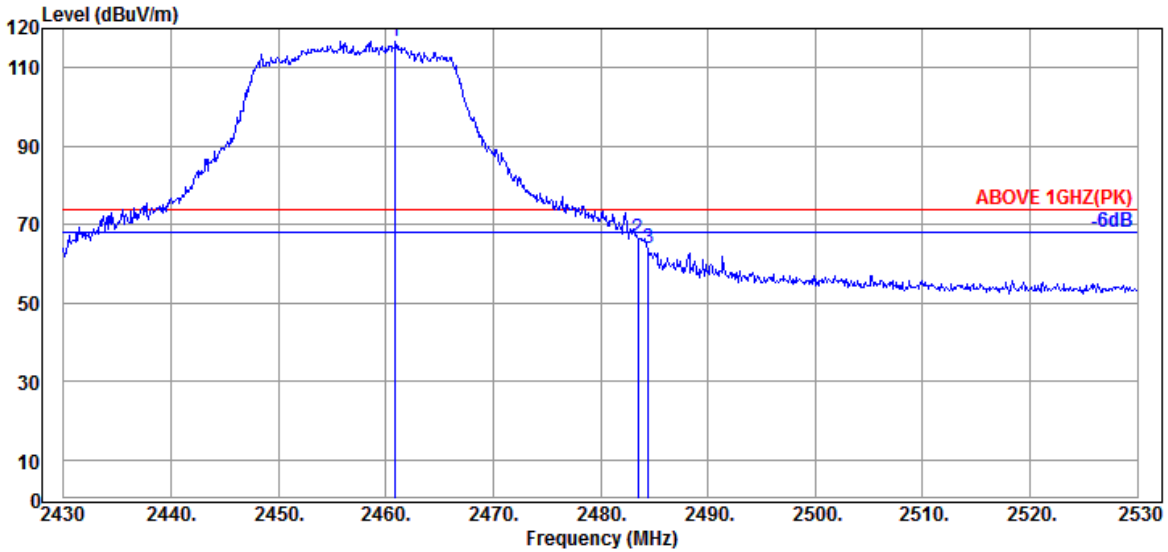

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.900	28.43	5.84	39.92	122.31	116.66	---	---	Peak
2483.500	28.47	5.87	39.92	71.88	66.30	74.00	7.70	Peak
2484.500	28.47	5.87	39.92	69.63	64.05	74.00	9.95	Peak

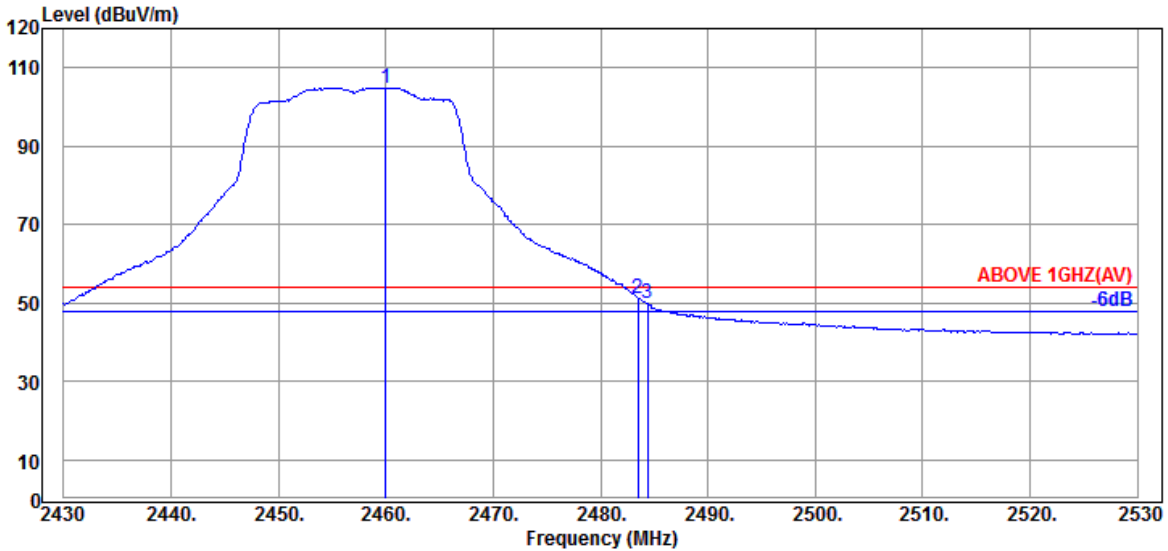


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.41	5.83	39.92	110.59	104.91	---	---	Average
2483.500	28.47	5.87	39.92	56.85	51.27	54.00	2.73	Average
2484.400	28.47	5.87	39.92	55.28	49.70	54.00	4.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

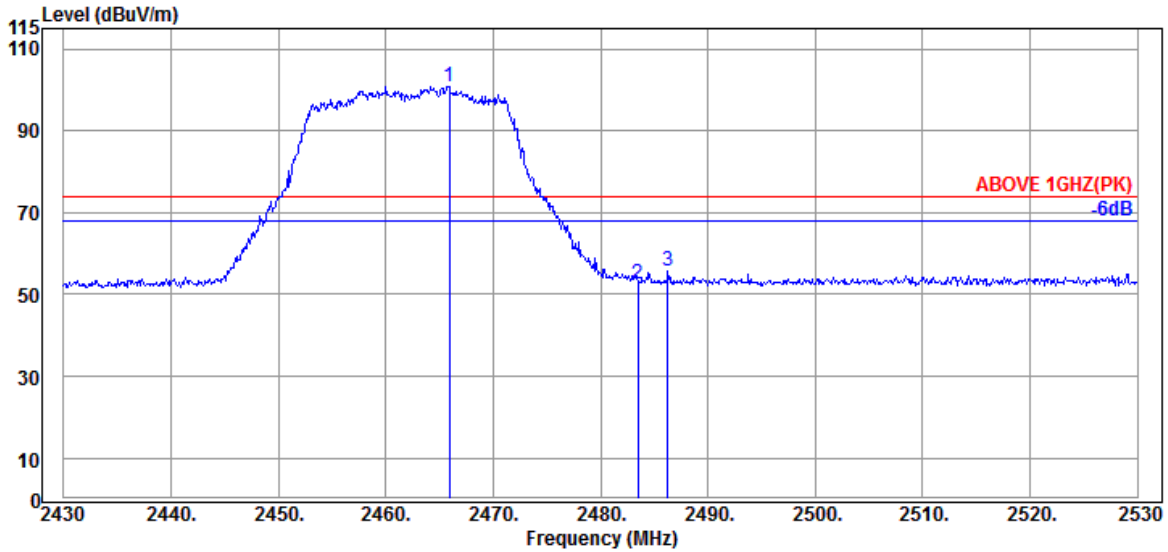

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.43	5.84	39.92	106.58	100.93	---	---	Peak
2483.500	28.47	5.87	39.92	58.26	52.68	74.00	21.32	Peak
2486.300	28.47	5.87	39.92	61.24	55.66	74.00	18.34	Peak

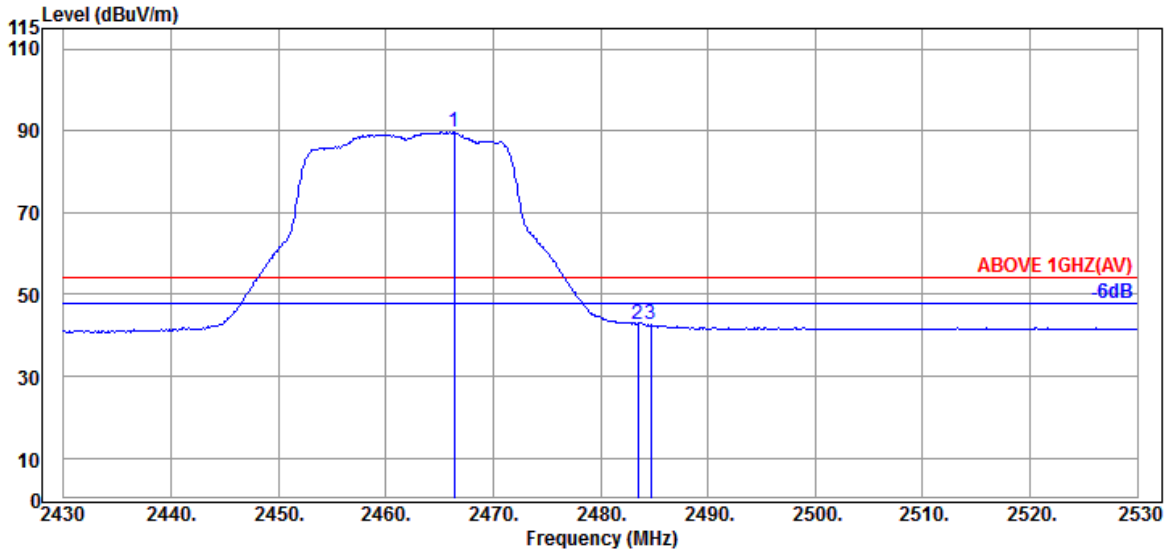


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	5.84	39.92	95.28	89.63	---	---	Average
2483.500	28.47	5.87	39.92	48.34	42.76	54.00	11.24	Average
2484.700	28.47	5.87	39.92	48.12	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

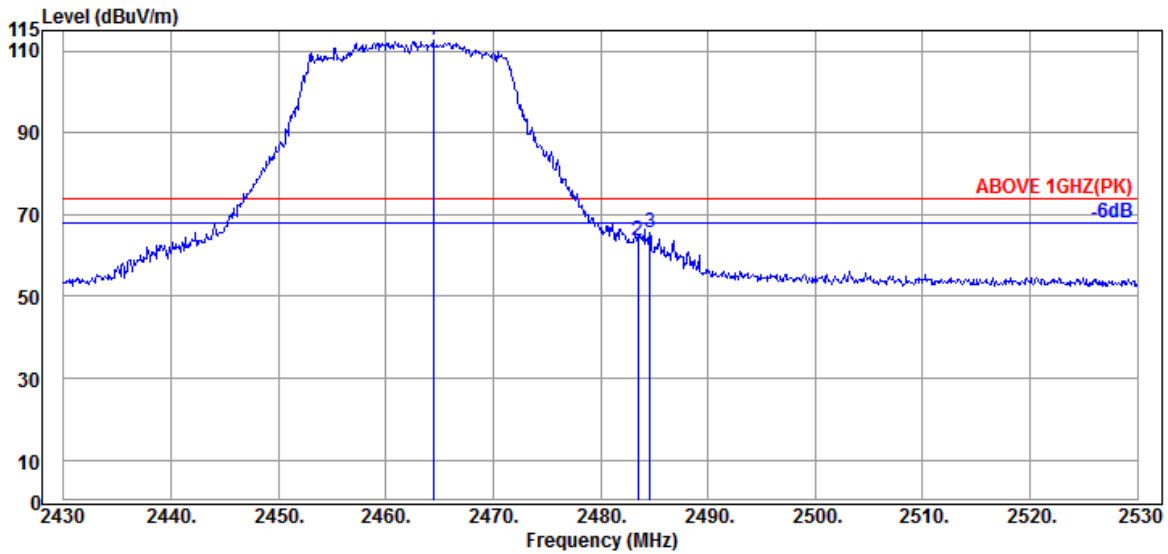

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.43	5.84	39.92	118.29	112.64	---	---	Peak
2483.500	28.47	5.87	39.92	69.35	63.77	74.00	10.23	Peak
2484.600	28.47	5.87	39.92	71.15	65.57	74.00	8.43	Peak

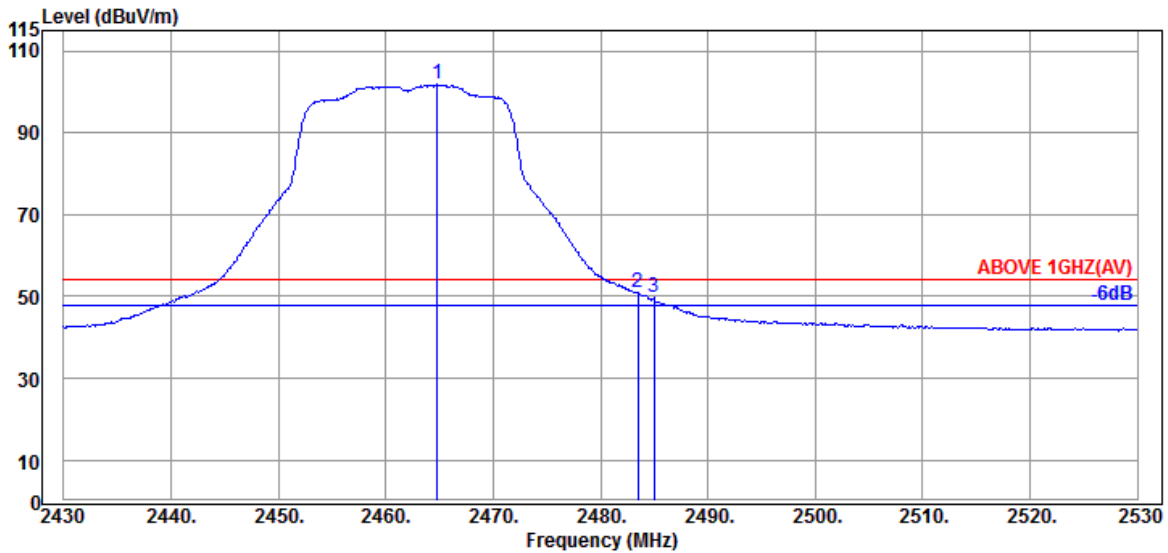


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	5.84	39.92	107.43	101.78	---	---	Average
2483.500	28.47	5.87	39.92	56.66	51.08	54.00	2.92	Average
2485.000	28.47	5.87	39.92	55.33	49.75	54.00	4.25	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

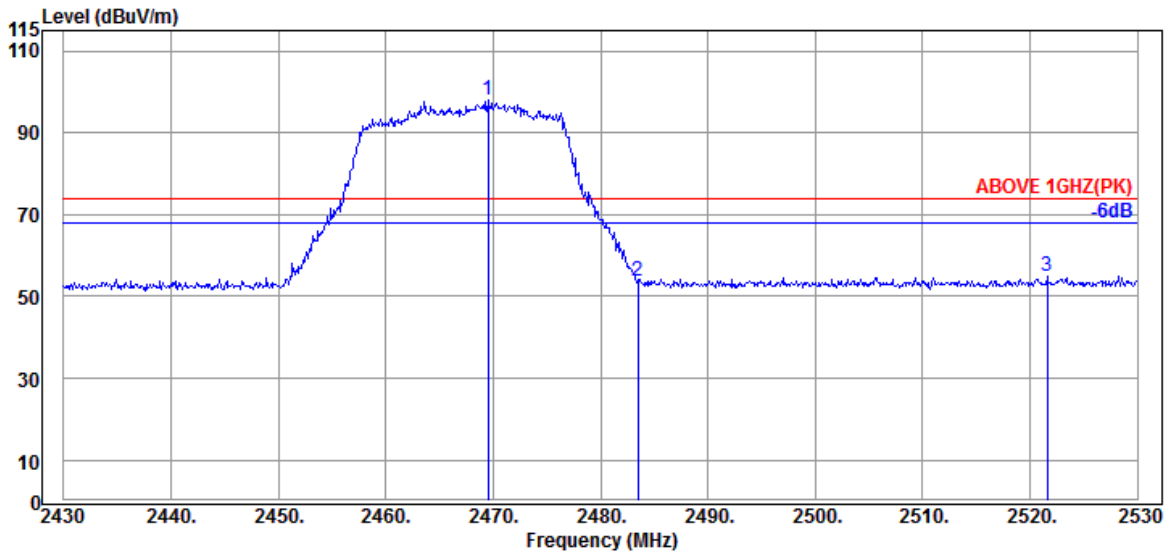

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.44	5.85	39.92	103.78	98.15	---	---	Peak
2483.500	28.47	5.87	39.92	59.21	53.63	74.00	20.37	Peak
2521.600	28.63	5.94	39.93	60.31	54.95	74.00	19.05	Peak

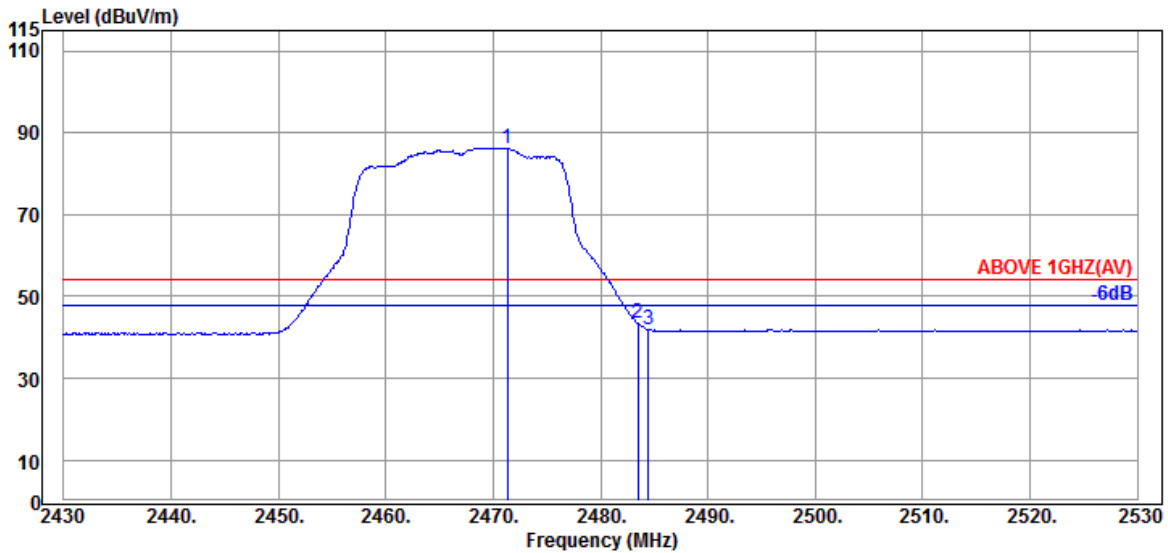


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	5.85	39.92	91.96	86.33	---	---	Average
2483.500	28.47	5.87	39.92	48.94	43.36	54.00	10.64	Average
2484.500	28.47	5.87	39.92	47.67	42.09	54.00	11.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

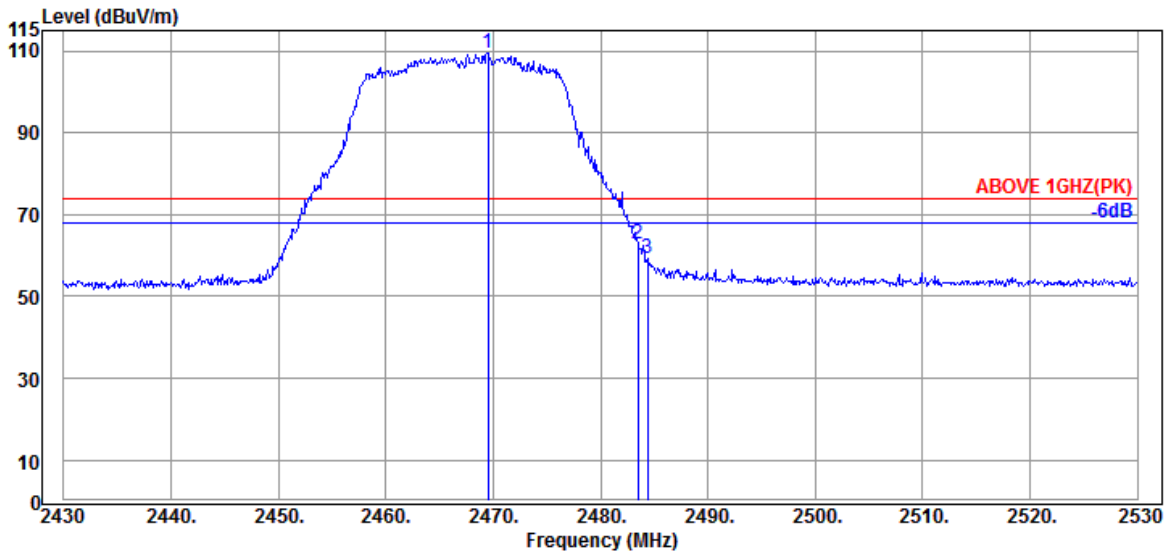

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.44	5.85	39.92	115.09	109.46	---	---	Peak
2483.500	28.47	5.87	39.92	68.26	62.68	74.00	11.32	Peak
2484.400	28.47	5.87	39.92	64.91	59.33	74.00	14.67	Peak

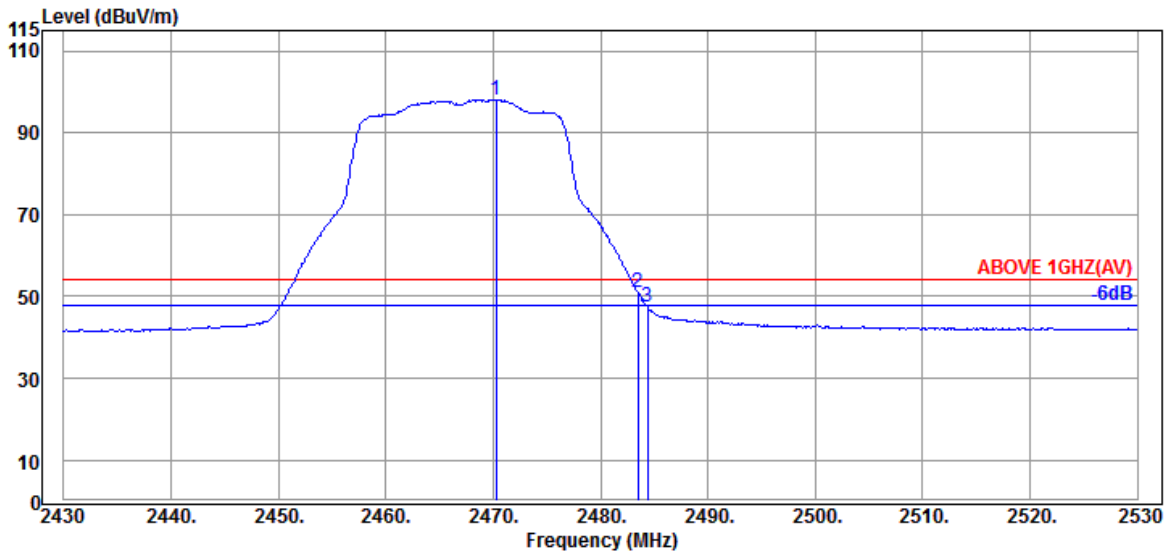


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	28.44	5.85	39.92	103.66	98.03	---	---	Average
2483.500	28.47	5.87	39.92	56.56	50.98	54.00	3.02	Average
2484.400	28.47	5.87	39.92	52.88	47.30	54.00	6.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

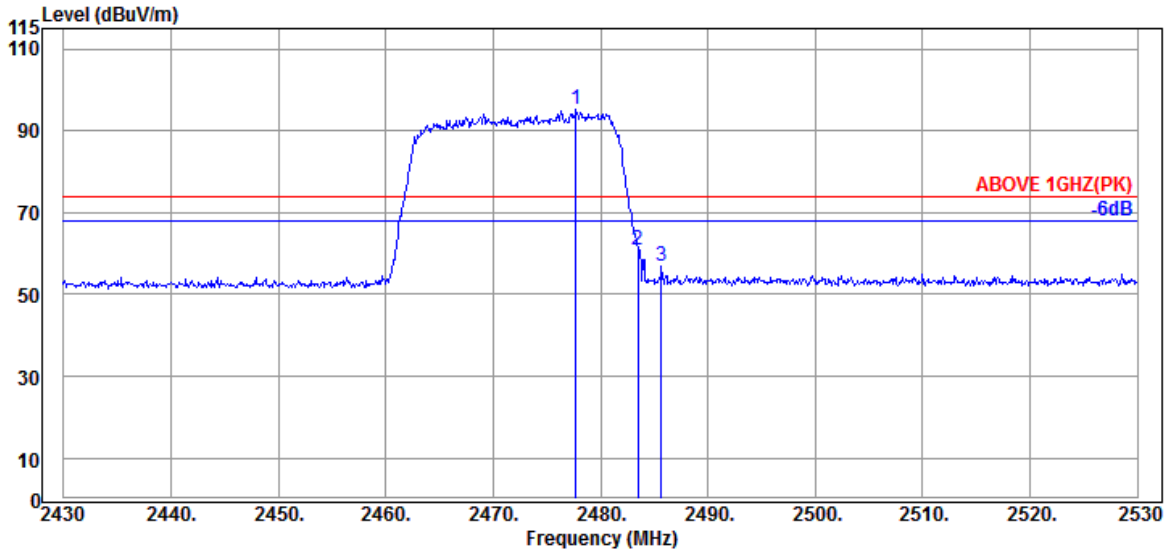

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	28.46	5.86	39.92	100.75	95.15	---	---	Peak
2483.500	28.47	5.87	39.92	66.29	60.71	74.00	13.29	Peak
2485.700	28.47	5.87	39.92	62.49	56.91	74.00	17.09	Peak

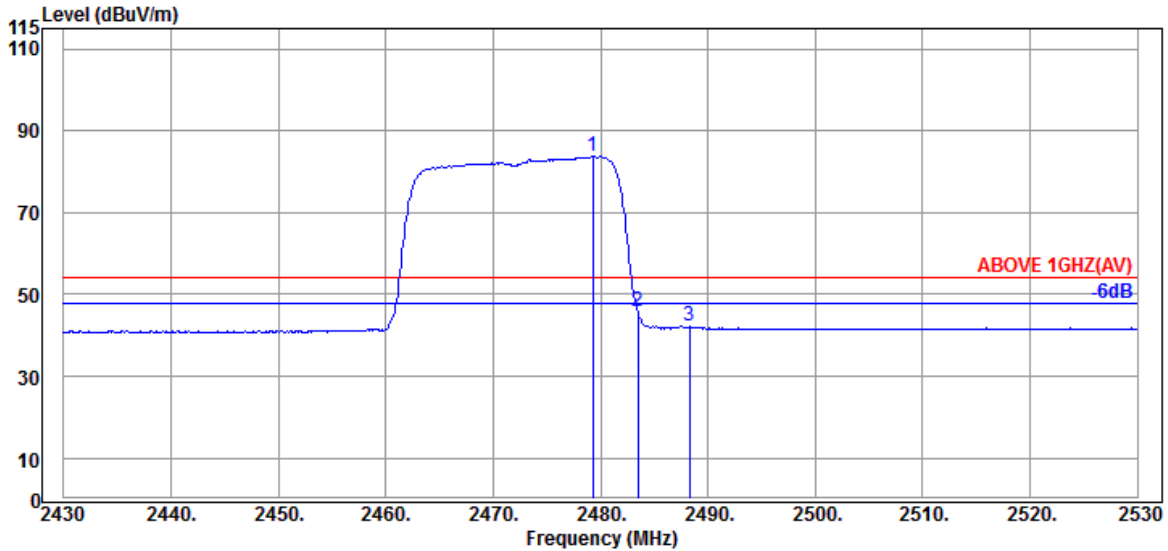


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.46	5.86	39.92	89.43	83.83	---	---	Average
2483.500	28.47	5.87	39.92	51.25	45.67	54.00	8.33	Average
2488.300	28.47	5.87	39.92	47.84	42.26	54.00	11.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

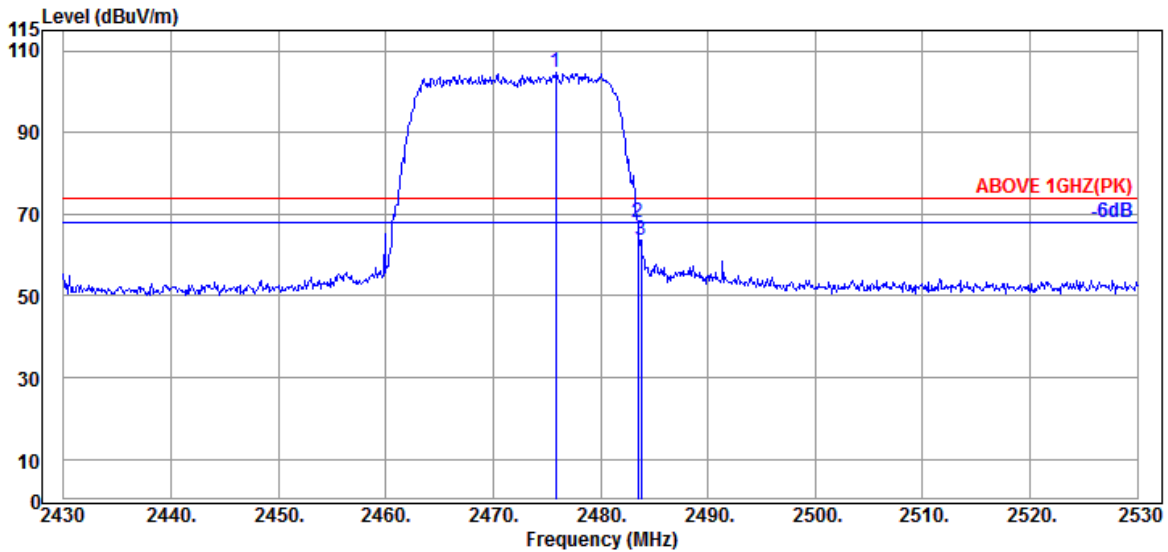

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.46	5.86	39.92	110.27	104.67	---	---	Peak
2483.500	28.47	5.87	39.92	73.72	68.14	74.00	5.86	Peak
2483.800	28.47	5.87	39.92	69.26	63.68	74.00	10.32	Peak

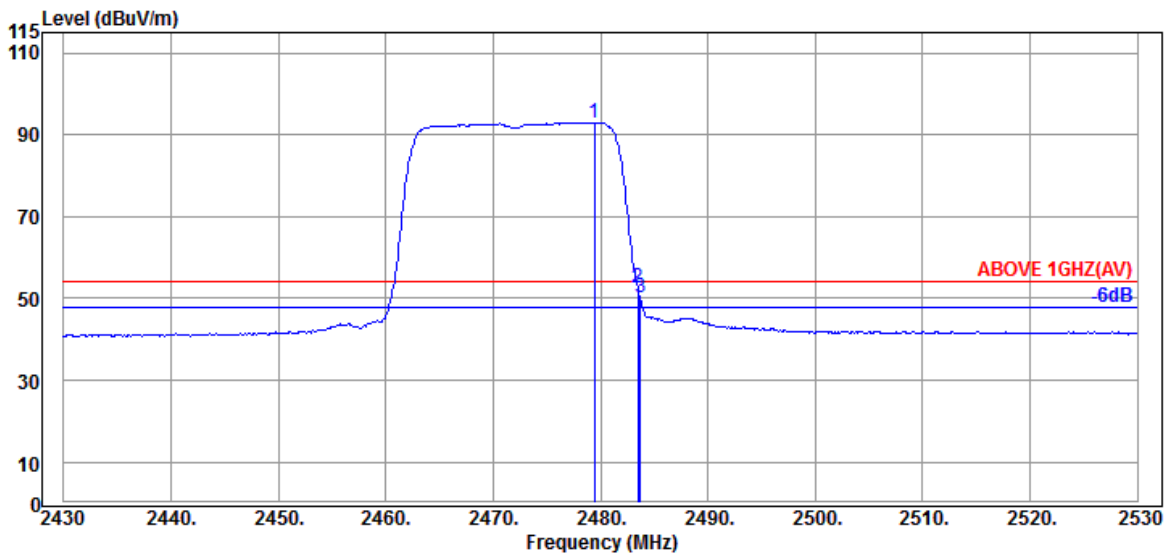


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.46	5.86	39.92	98.67	93.07	---	---	Average
2483.500	28.47	5.87	39.92	58.05	52.47	54.00	1.53	Average
2483.700	28.47	5.87	39.92	55.82	50.24	54.00	3.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

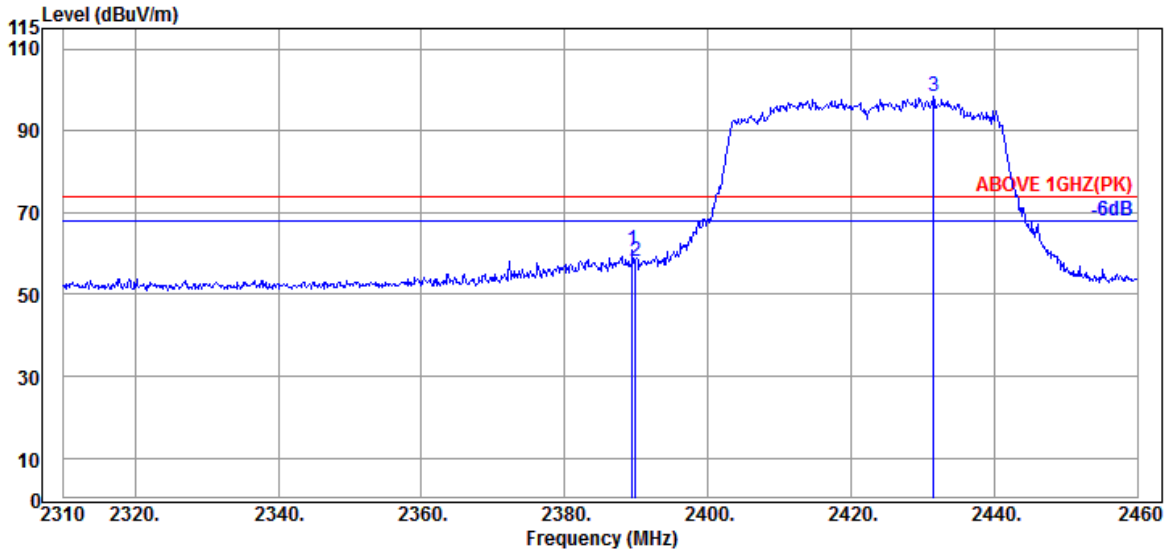

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.21	5.72	39.93	66.82	60.82	74.00	13.18	Peak
2389.950	28.21	5.72	39.93	64.15	58.15	74.00	15.85	Peak
@ 2431.500	28.27	5.78	39.93	104.33	98.45	---	---	Peak

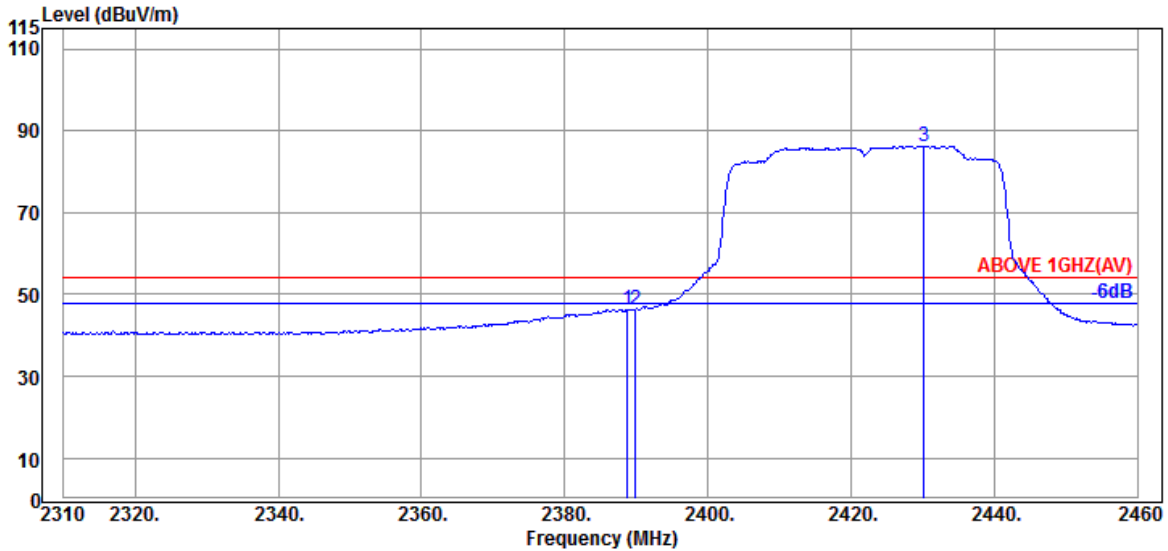


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.750	28.21	5.72	39.93	52.36	46.36	54.00	7.64	Average
2389.950	28.21	5.72	39.93	52.27	46.27	54.00	7.73	Average
@ 2430.150	28.27	5.78	39.93	92.07	86.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

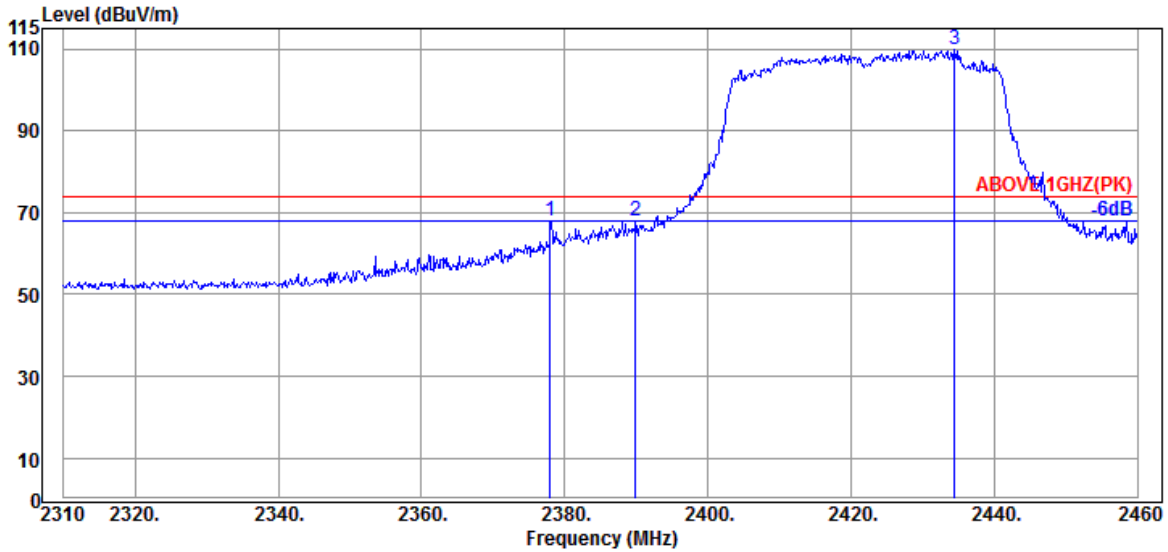

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.950	28.27	5.71	39.93	74.06	68.11	74.00	5.89	Peak
2389.950	28.21	5.72	39.93	73.78	67.78	74.00	6.22	Peak
@ 2434.500	28.31	5.79	39.93	115.69	109.86	---	---	Peak

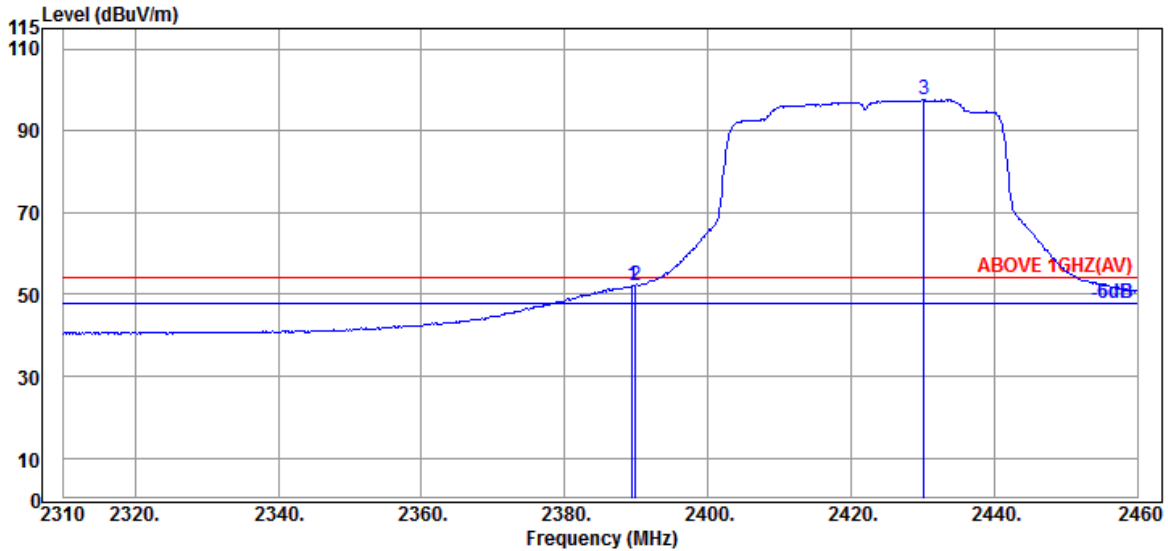


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.21	5.72	39.93	58.04	52.04	54.00	1.96	Average
2389.950	28.21	5.72	39.93	58.36	52.36	54.00	1.64	Average
@ 2430.150	28.27	5.78	39.93	103.46	97.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

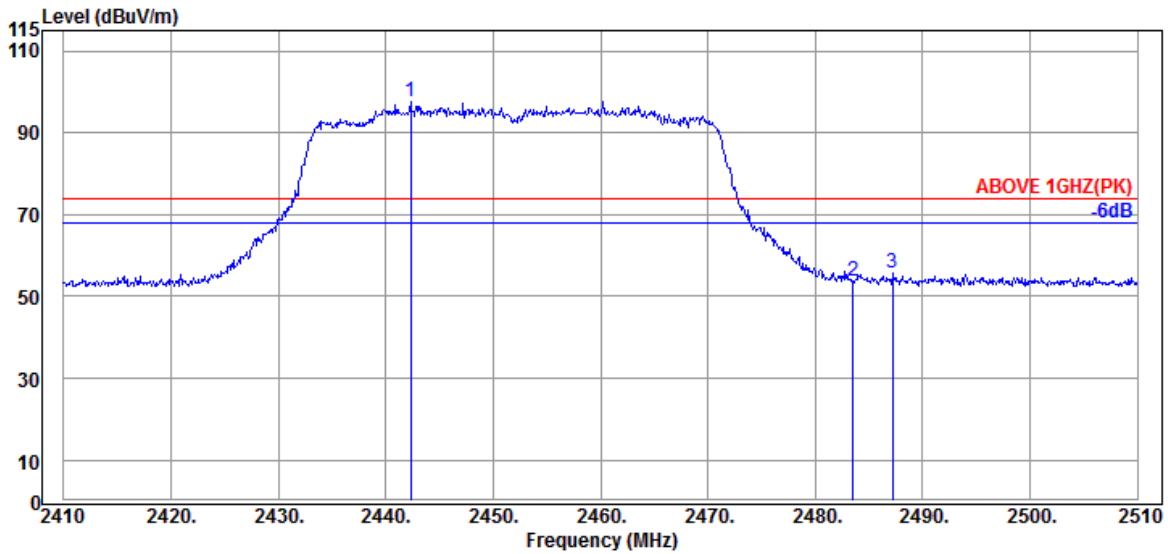

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.300	28.36	5.80	39.93	103.38	97.61	---	---	Peak
2483.500	28.47	5.87	39.92	59.43	53.85	74.00	20.15	Peak
2487.200	28.47	5.87	39.92	61.19	55.61	74.00	18.39	Peak

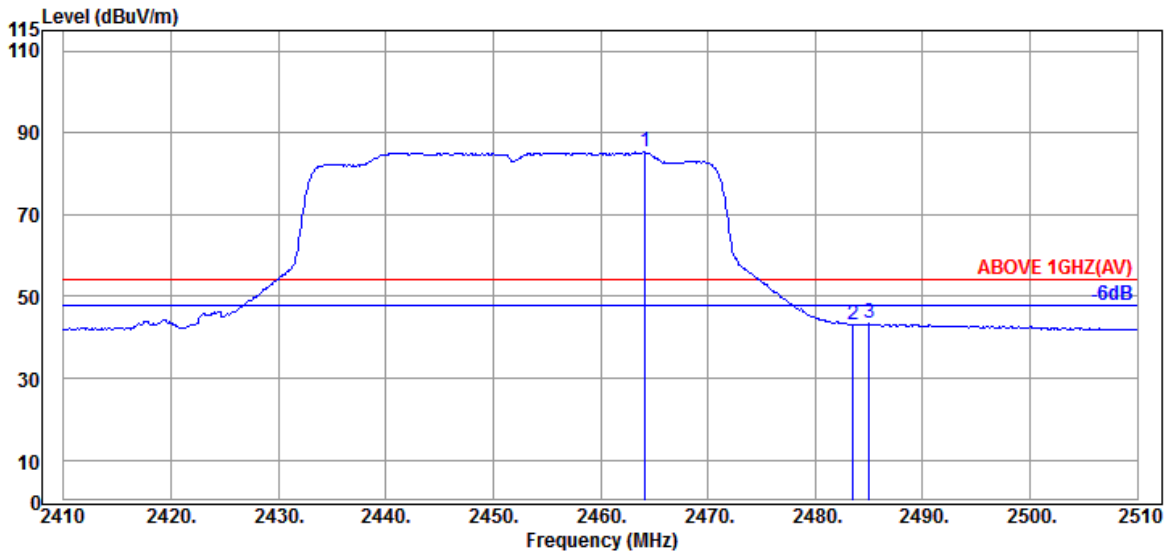


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	5.84	39.92	90.99	85.34	---	---	Average
2483.500	28.47	5.87	39.92	48.65	43.07	54.00	10.93	Average
2485.000	28.47	5.87	39.92	48.95	43.37	54.00	10.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

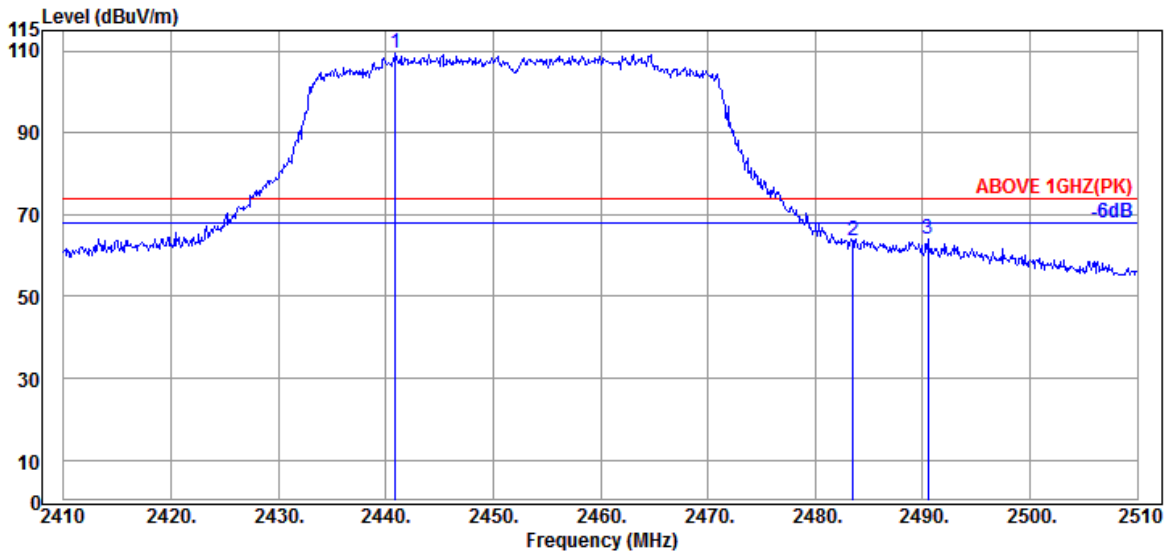

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.900	28.36	5.80	39.93	115.33	109.56	---	---	Peak
2483.500	28.47	5.87	39.92	69.27	63.69	74.00	10.31	Peak
2490.500	28.49	5.88	39.92	69.68	64.13	74.00	9.87	Peak

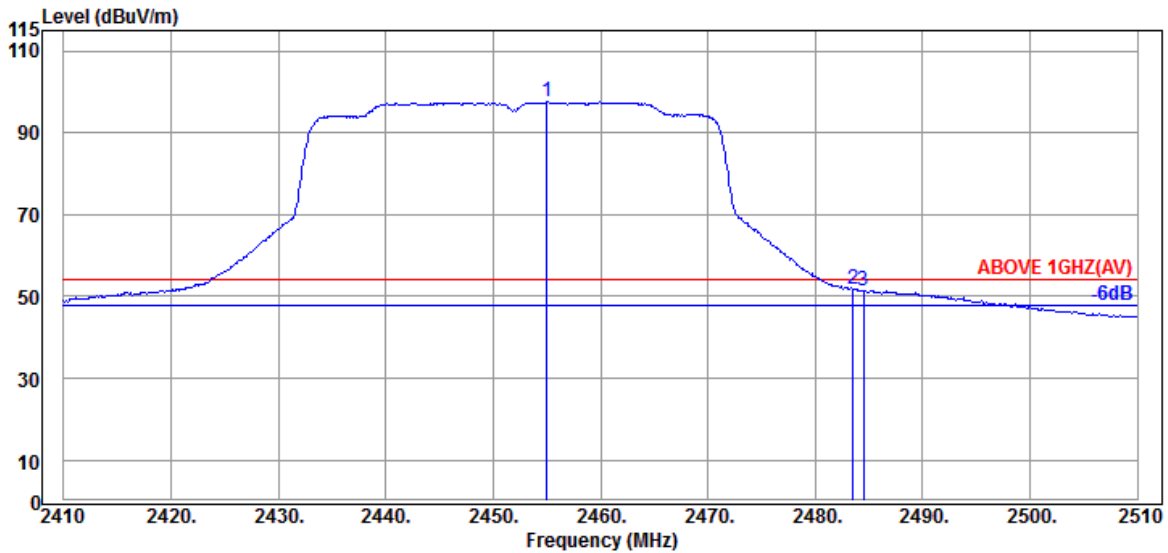


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	28.41	5.83	39.92	103.17	97.49	---	---	Average
2483.500	28.47	5.87	39.92	57.46	51.88	54.00	2.12	Average
2484.500	28.47	5.87	39.92	57.14	51.56	54.00	2.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

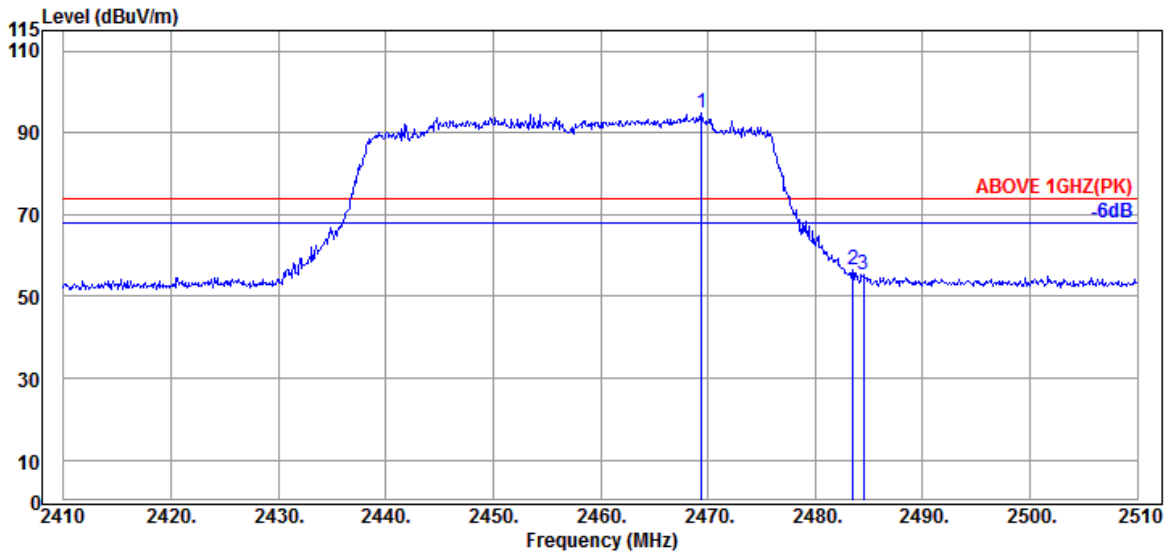

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	5.85	39.92	100.44	94.81	---	---	Peak
2483.500	28.47	5.87	39.92	62.16	56.58	74.00	17.42	Peak
2484.500	28.47	5.87	39.92	60.74	55.16	74.00	18.84	Peak

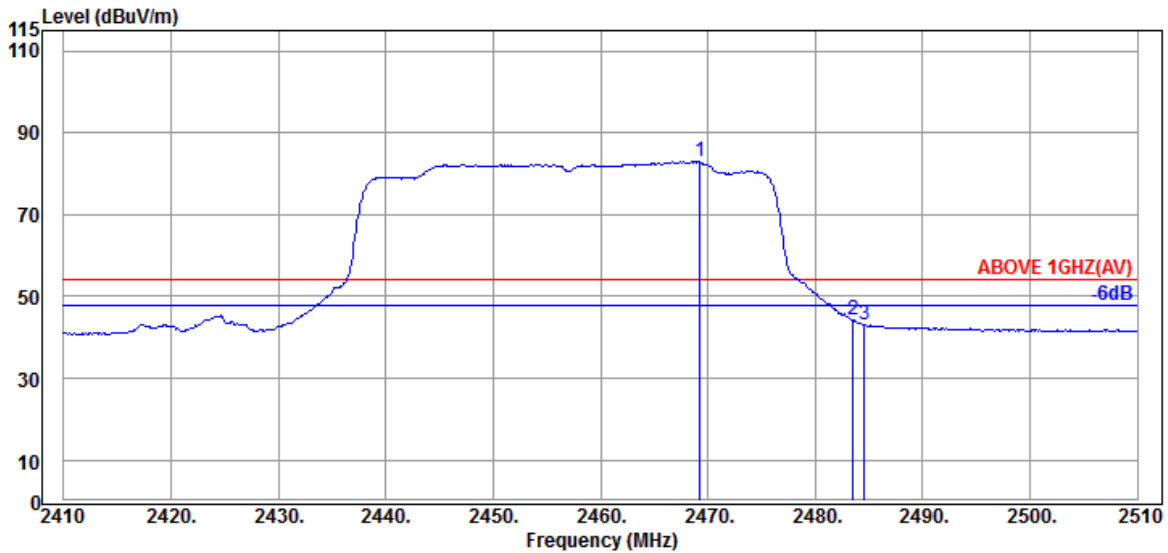


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	5.85	39.92	88.61	82.98	---	---	Average
2483.500	28.47	5.87	39.92	49.89	44.31	54.00	9.69	Average
2484.600	28.47	5.87	39.92	48.75	43.17	54.00	10.83	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

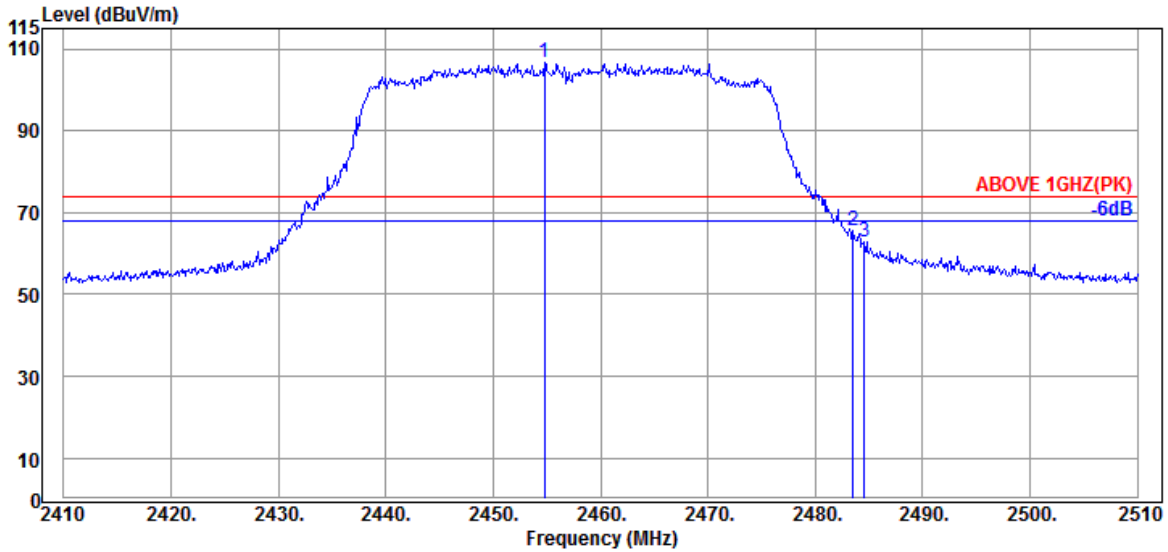

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	28.41	5.83	39.92	112.50	106.82	---	---	Peak
2483.500	28.47	5.87	39.92	71.15	65.57	74.00	8.43	Peak
2484.600	28.47	5.87	39.92	68.35	62.77	74.00	11.23	Peak

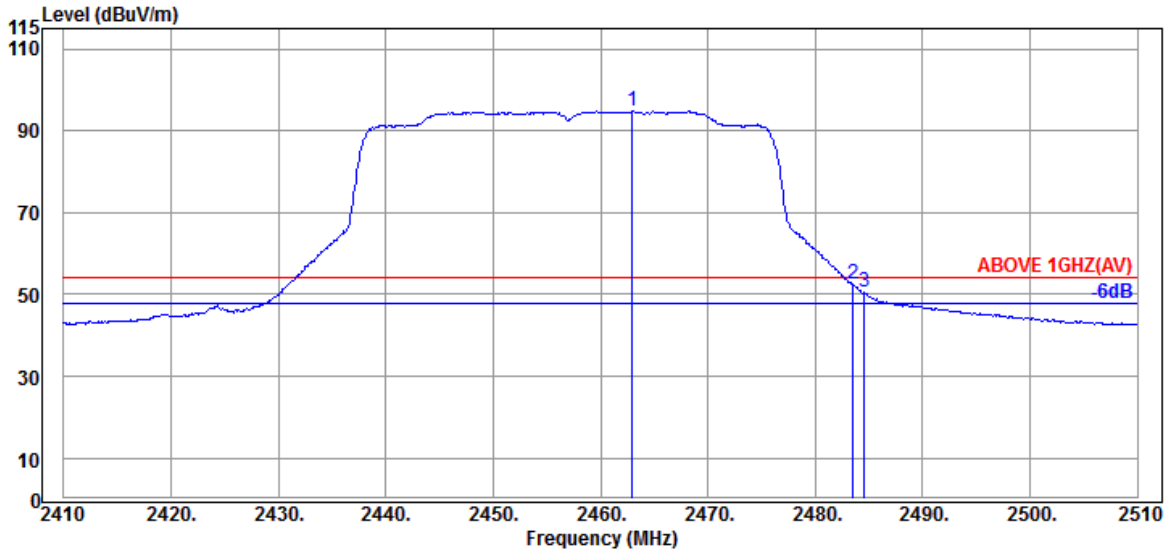


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	28.43	5.84	39.92	100.36	94.71	---	---	Average
2483.500	28.47	5.87	39.92	57.96	52.38	54.00	1.62	Average
2484.600	28.47	5.87	39.92	55.98	50.40	54.00	3.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

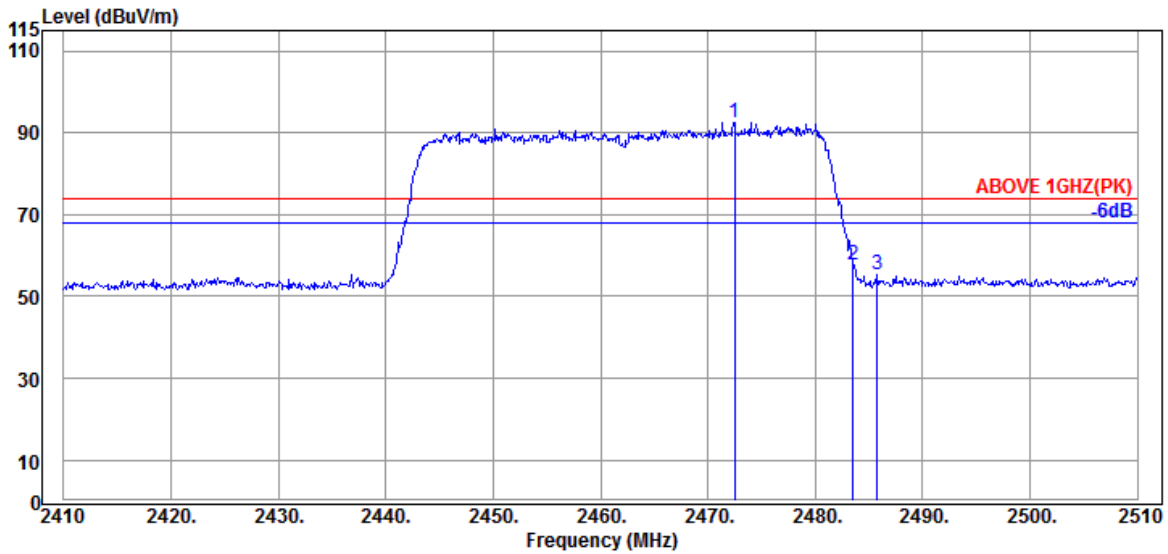

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	28.44	5.85	39.92	98.25	92.62	---	---	Peak
2483.500	28.47	5.87	39.92	63.18	57.60	74.00	16.40	Peak
2485.800	28.47	5.87	39.92	60.85	55.27	74.00	18.73	Peak

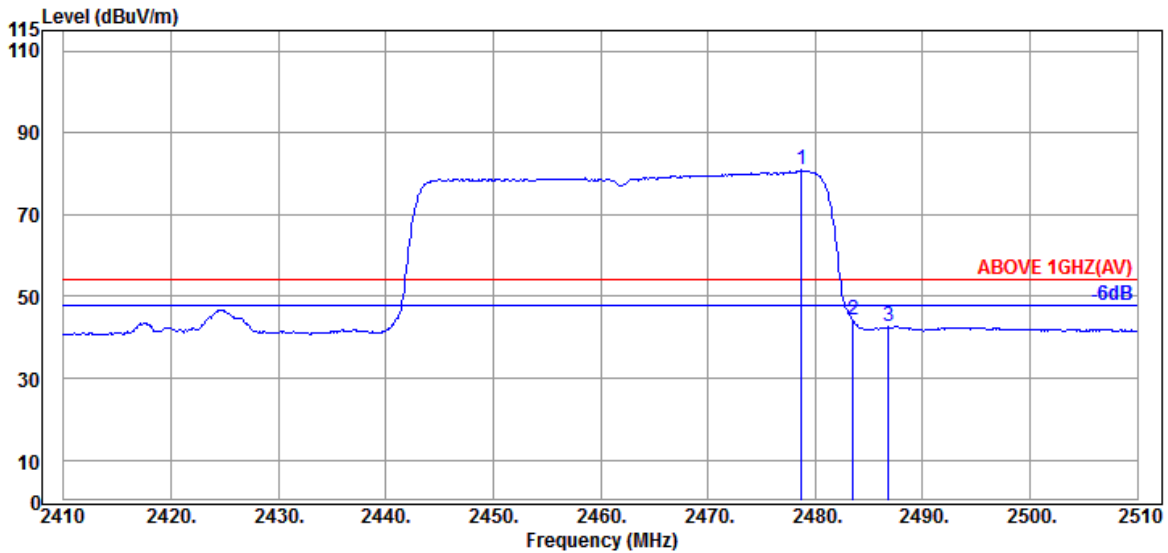


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.46	5.86	39.92	86.44	80.84	---	---	Average
2483.500	28.47	5.87	39.92	49.78	44.20	54.00	9.80	Average
2486.800	28.47	5.87	39.92	48.18	42.60	54.00	11.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

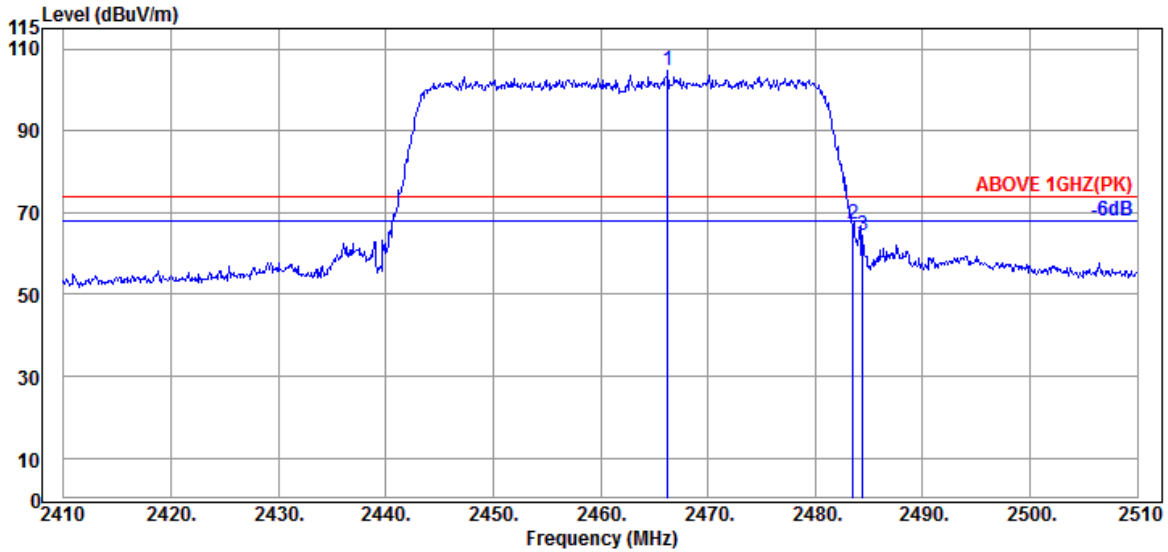

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	5.84	39.92	110.37	104.72	---	---	Peak
2483.500	28.47	5.87	39.92	72.88	67.30	74.00	6.70	Peak
2484.400	28.47	5.87	39.92	70.16	64.58	74.00	9.42	Peak

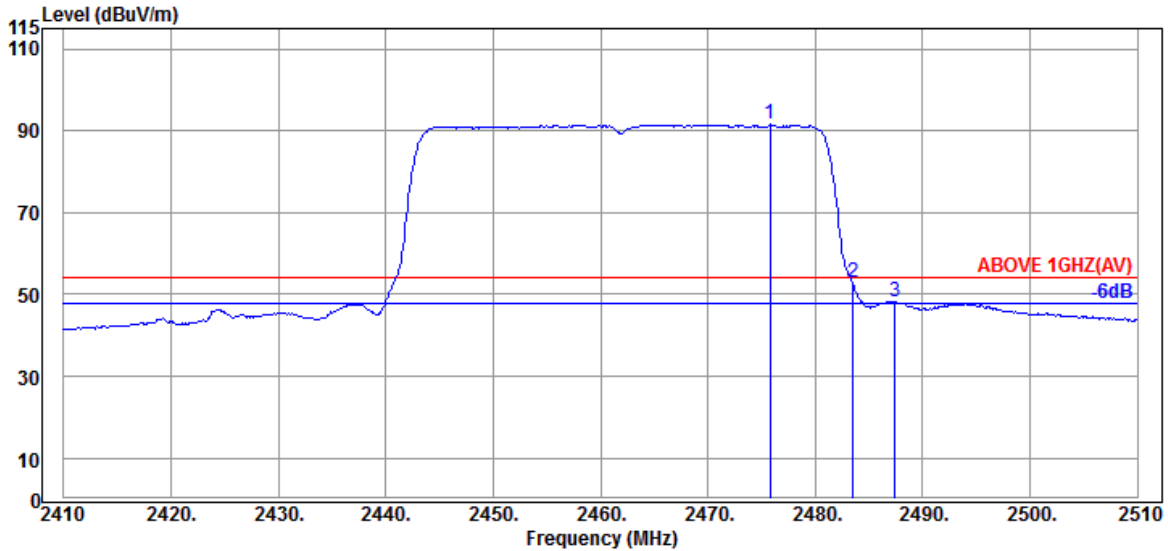


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.46	5.86	39.92	97.14	91.54	---	---	Average
2483.500	28.47	5.87	39.92	58.36	52.78	54.00	1.22	Average
2487.400	28.47	5.87	39.92	53.90	48.32	54.00	5.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

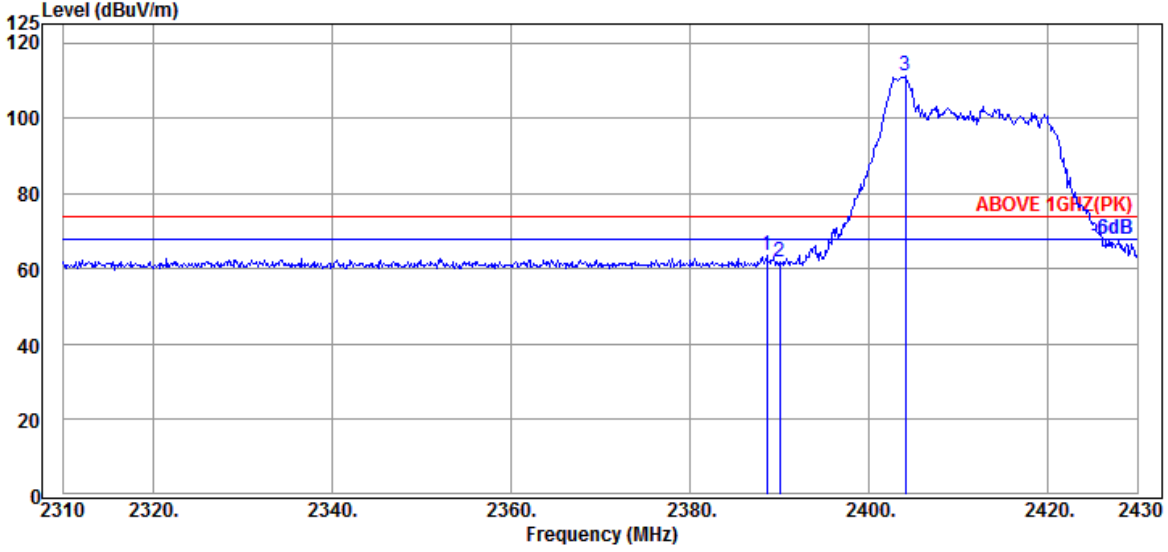

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.21	5.72	39.93	69.39	63.39	74.00	10.61	Peak
2390.040	28.21	5.72	39.93	67.92	61.92	74.00	12.08	Peak
@ 2404.080	28.10	5.74	39.93	117.23	111.14	---	---	Peak

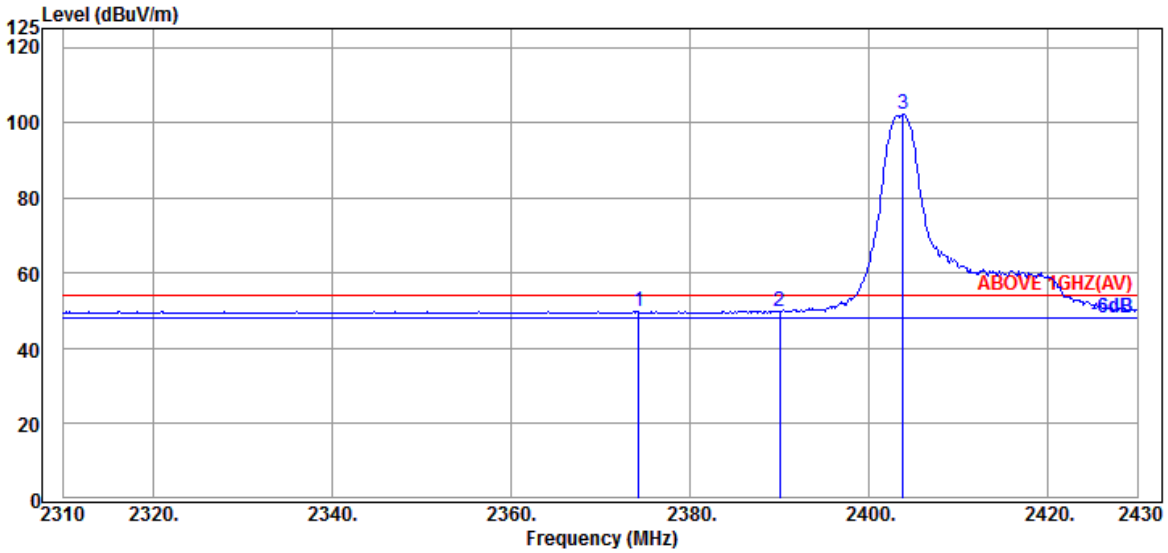


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.320	28.33	5.70	39.93	55.84	49.94	54.00	4.06	Average
2390.040	28.21	5.72	39.93	55.97	49.97	54.00	4.03	Average
@ 2403.840	28.10	5.74	39.93	108.36	102.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

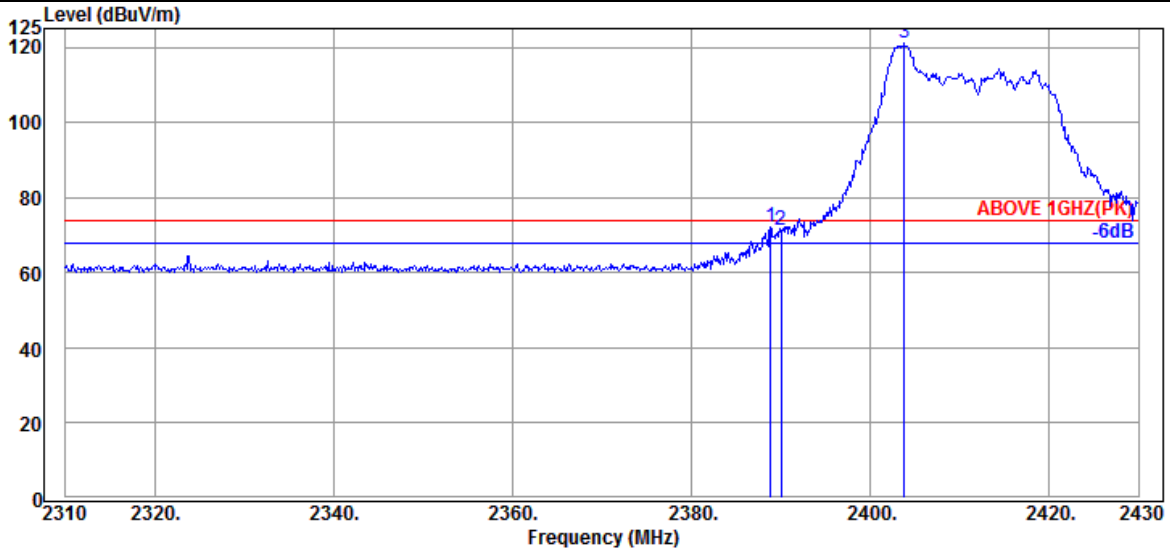

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.21	5.72	39.93	78.30	72.30	74.00	1.70	Peak
2390.040	28.21	5.72	39.93	77.22	71.22	74.00	2.78	Peak
@ 2403.840	28.10	5.74	39.93	127.01	120.92	---	---	Peak

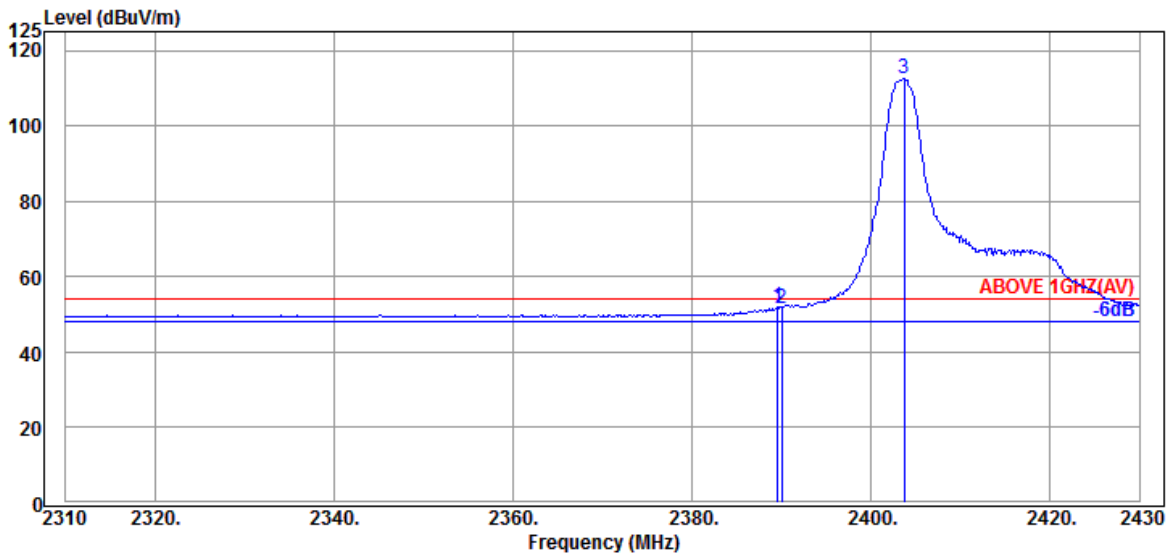


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	57.87	51.87	54.00	2.13	Average
2390.040	28.21	5.72	39.93	57.70	51.70	54.00	2.30	Average
@ 2403.720	28.10	5.74	39.93	118.50	112.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

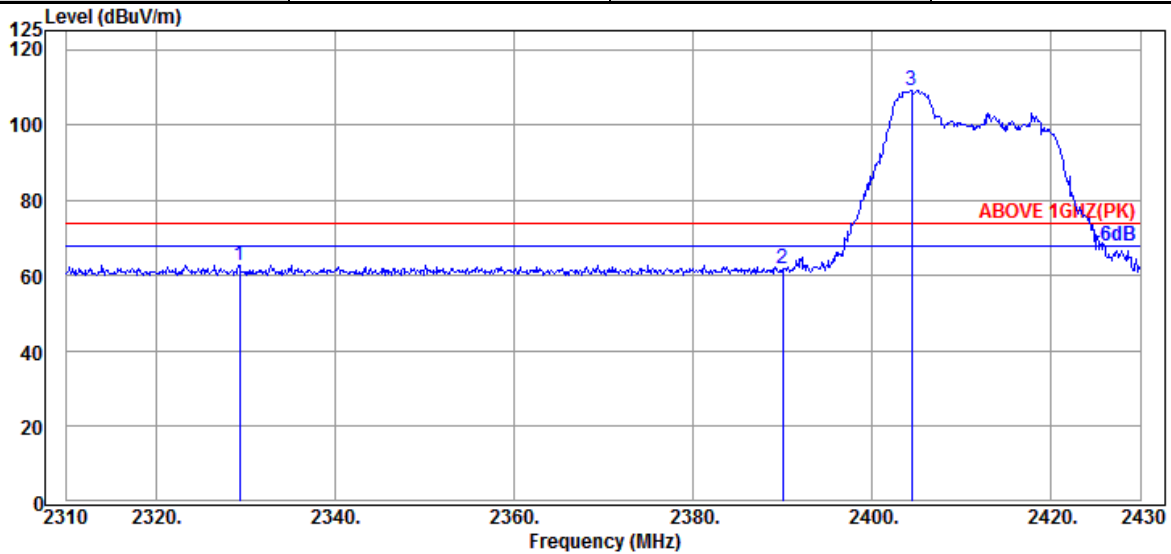

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.320	28.35	5.63	39.94	68.83	62.87	74.00	11.13	Peak
2390.040	28.21	5.72	39.93	67.88	61.88	74.00	12.12	Peak
@ 2404.440	28.14	5.75	39.93	115.14	109.10	---	---	Peak

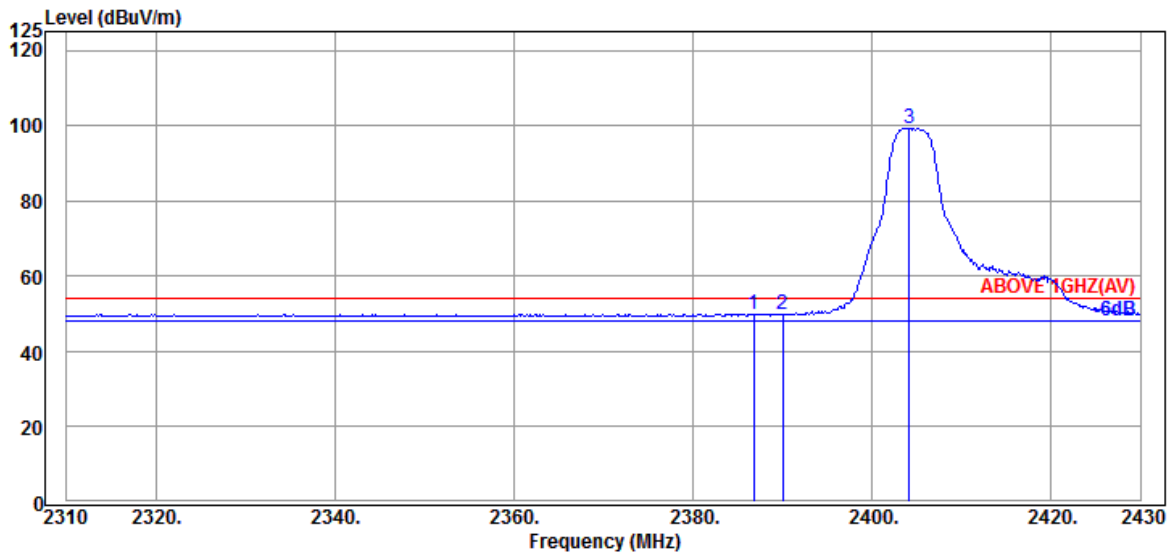


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.21	5.72	39.93	55.89	49.89	54.00	4.11	Average
2390.040	28.21	5.72	39.93	55.75	49.75	54.00	4.25	Average
@ 2404.200	28.10	5.74	39.93	105.39	99.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

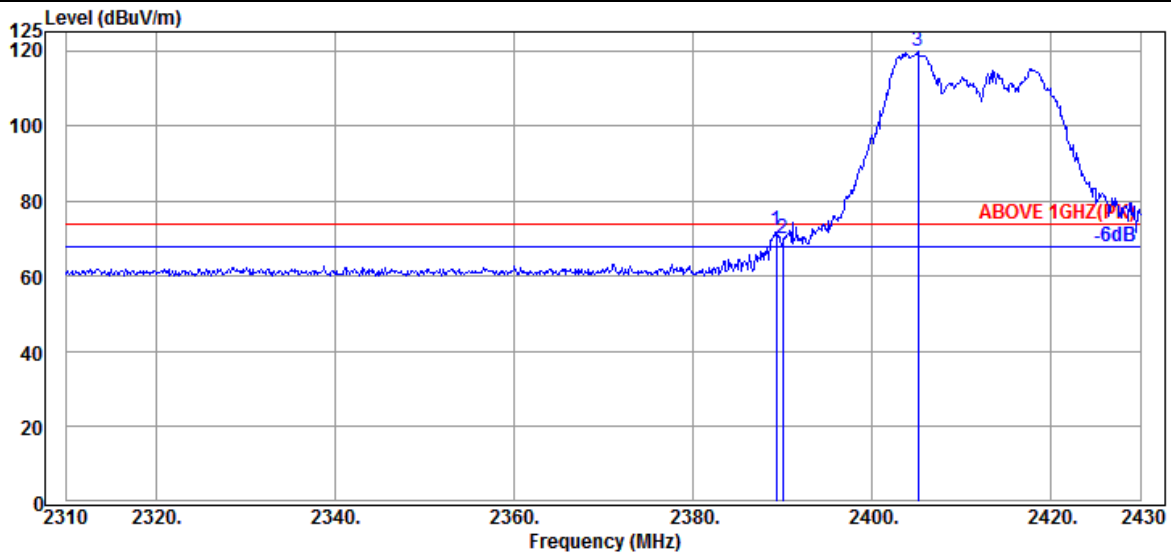

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	78.11	72.11	74.00	1.89	Peak
2390.040	28.21	5.72	39.93	75.86	69.86	74.00	4.14	Peak
@ 2405.160	28.14	5.75	39.93	125.81	119.77	---	---	Peak

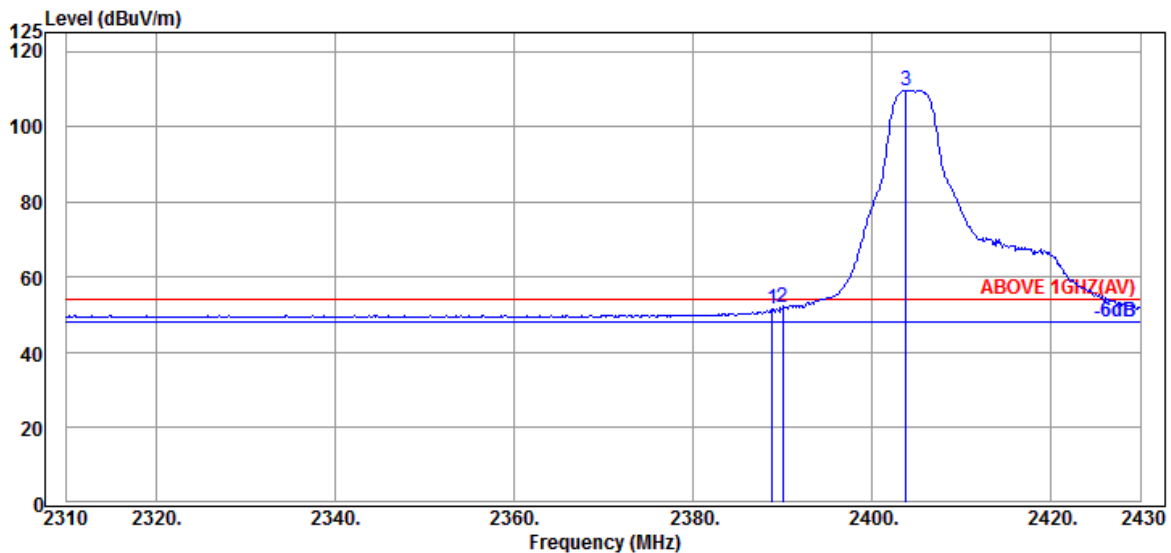


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.21	5.72	39.93	57.74	51.74	54.00	2.26	Average
2390.040	28.21	5.72	39.93	57.87	51.87	54.00	2.13	Average
@ 2403.840	28.10	5.74	39.93	115.83	109.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

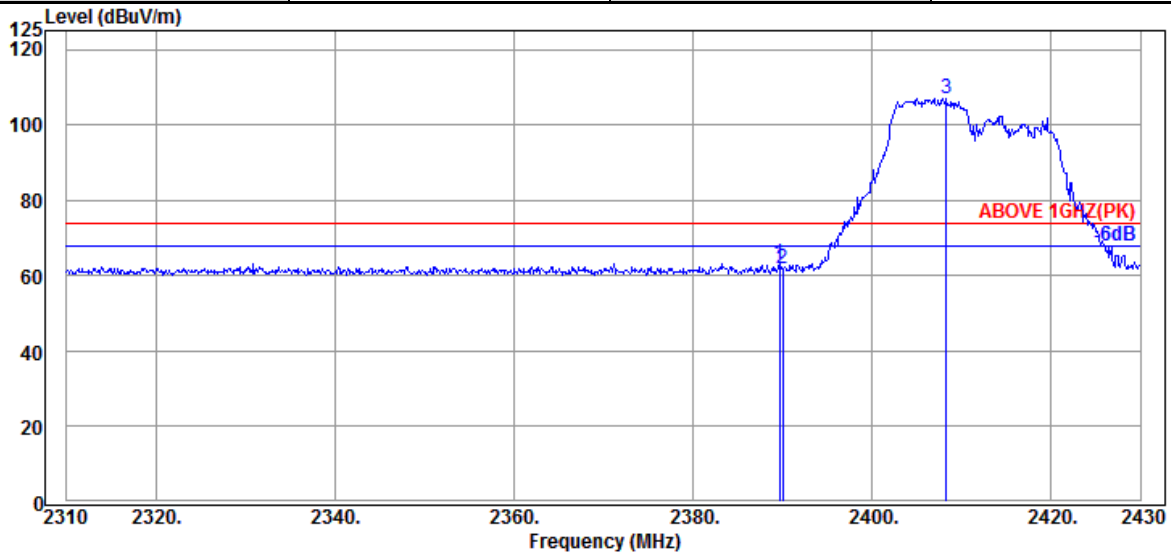

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	69.29	63.29	74.00	10.71	Peak
2390.040	28.21	5.72	39.93	67.89	61.89	74.00	12.11	Peak
@ 2408.280	28.14	5.75	39.93	112.98	106.94	---	---	Peak

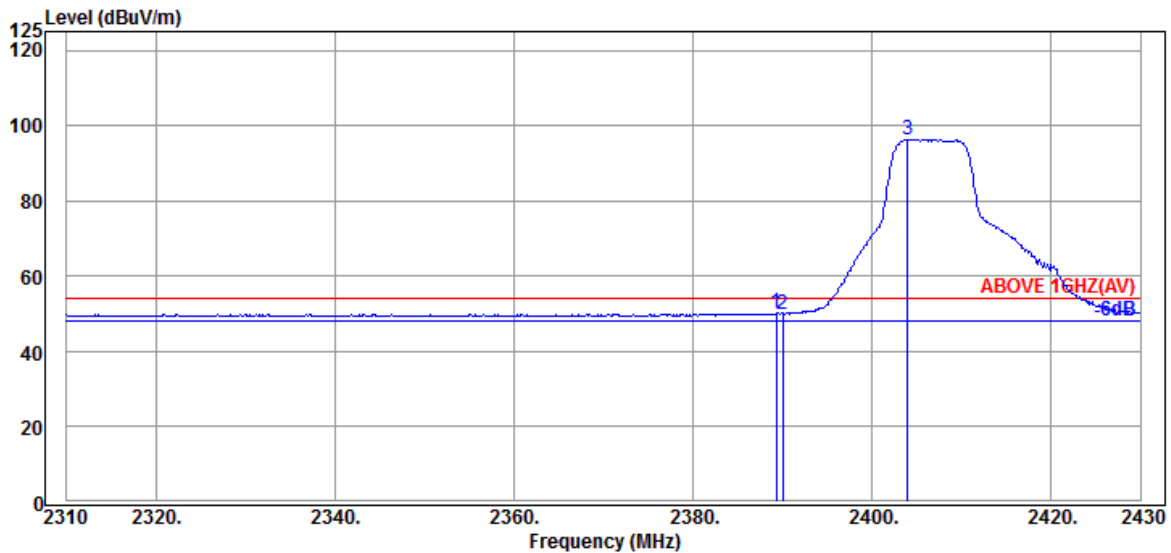


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	56.24	50.24	54.00	3.76	Average
2390.040	28.21	5.72	39.93	56.01	50.01	54.00	3.99	Average
@ 2403.960	28.10	5.74	39.93	102.45	96.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

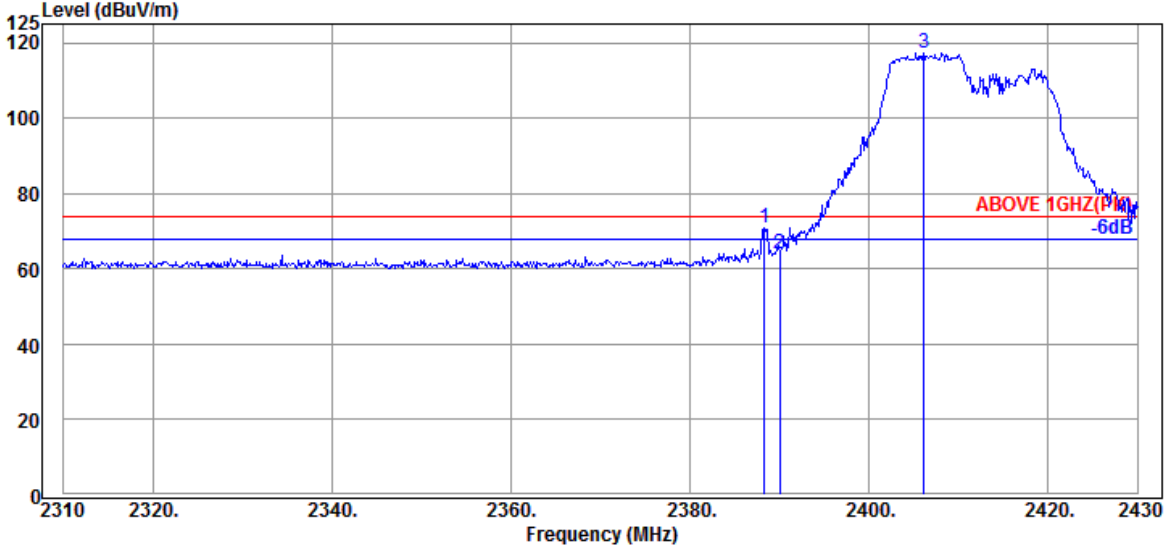

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	28.21	5.72	39.93	76.76	70.76	74.00	3.24	Peak
2390.040	28.21	5.72	39.93	70.03	64.03	74.00	9.97	Peak
@ 2406.120	28.14	5.75	39.93	123.19	117.15	---	---	Peak

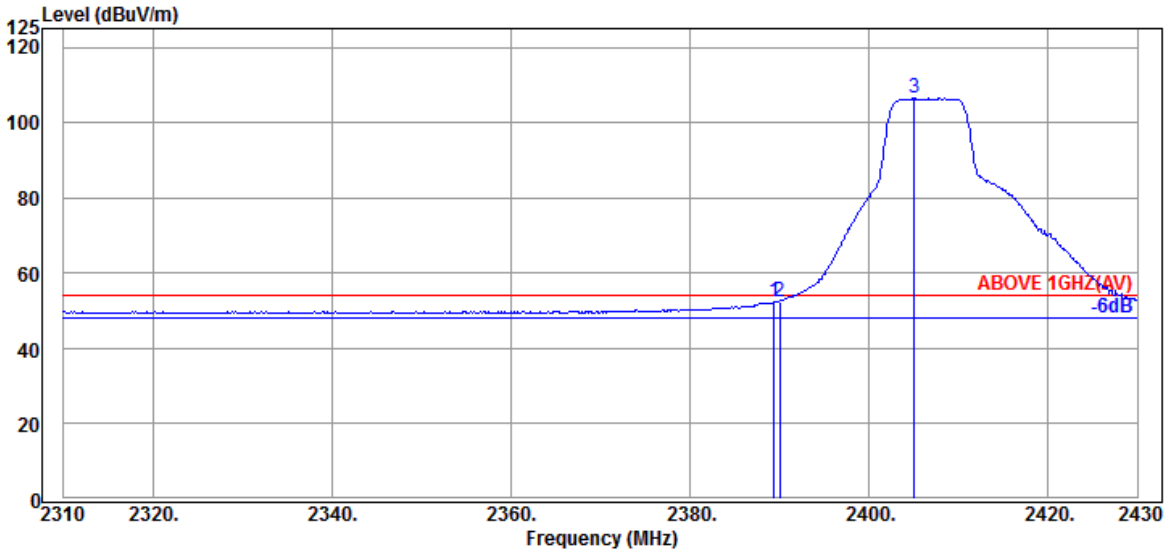


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	58.45	52.45	54.00	1.55	Average
2390.040	28.21	5.72	39.93	58.49	52.49	54.00	1.51	Average
@ 2405.040	28.14	5.75	39.93	112.55	106.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

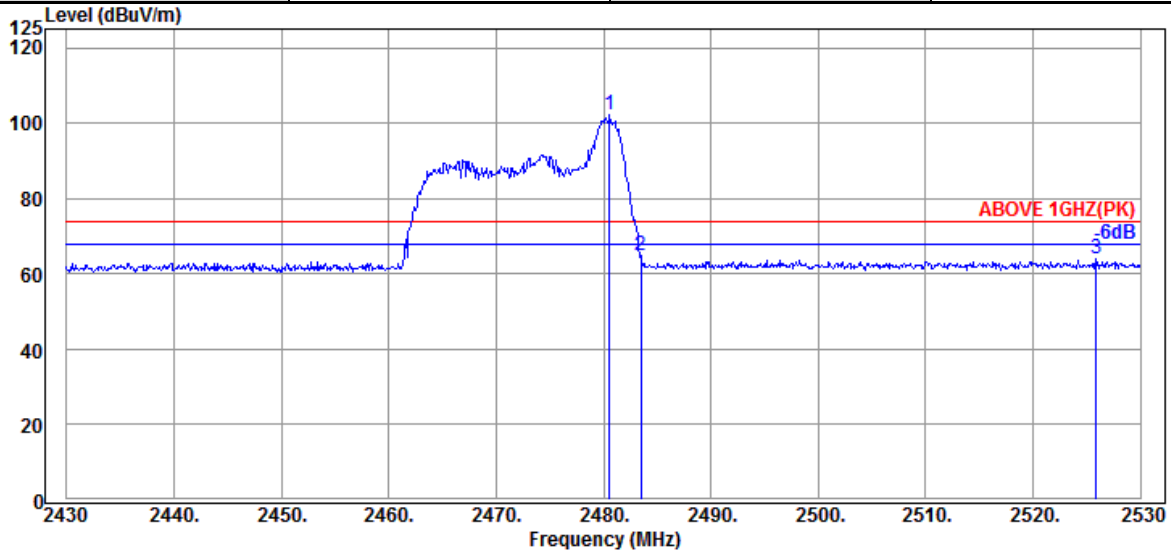

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.600	28.46	5.86	39.92	107.67	102.07	---	---	Peak
	2483.500	28.47	5.87	39.92	70.49	64.91	74.00	9.09	Peak
	2525.900	28.67	5.96	39.93	69.34	64.04	74.00	9.96	Peak

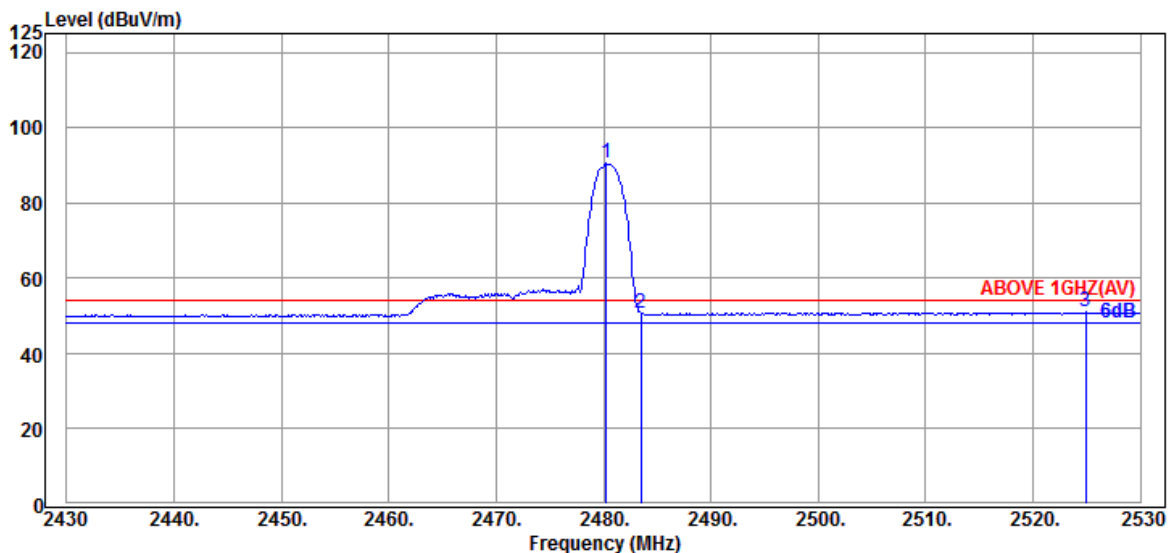


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.46	5.86	39.92	96.05	90.45	---	---	Average
	2483.500	28.47	5.87	39.92	56.46	50.88	54.00	3.12	Average
	2524.900	28.63	5.94	39.93	56.28	50.92	54.00	3.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

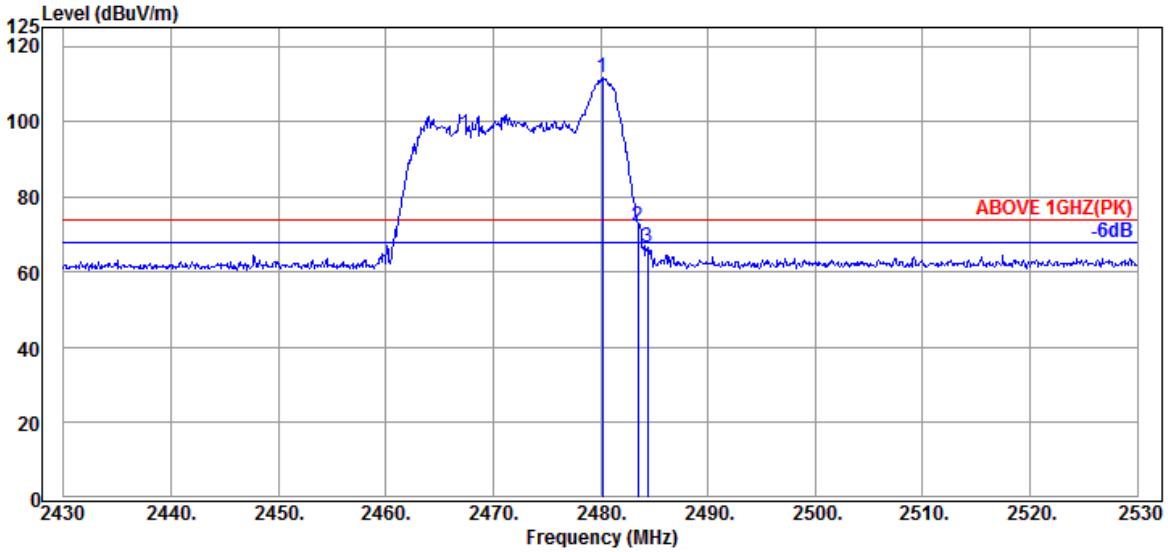

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	5.86	39.92	117.39	111.79	---	---	Peak
2483.500	28.47	5.87	39.92	77.56	71.98	74.00	2.02	Peak
2484.400	28.47	5.87	39.92	72.07	66.49	74.00	7.51	Peak

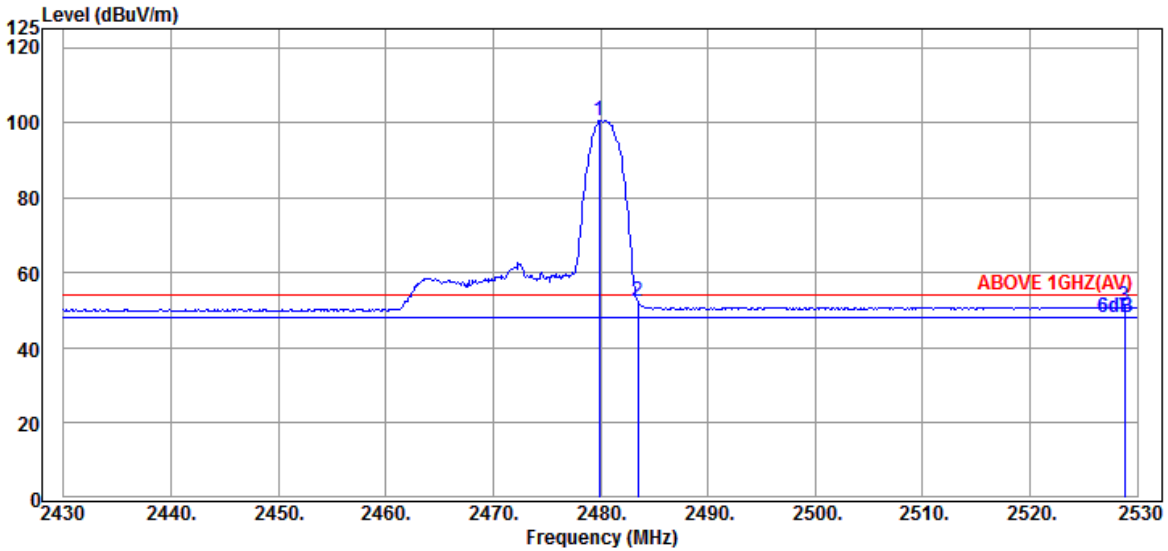


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	5.86	39.92	106.20	100.60	---	---	Average
2483.500	28.47	5.87	39.92	57.79	52.21	54.00	1.79	Average
2528.800	28.67	5.96	39.93	56.23	50.93	54.00	3.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

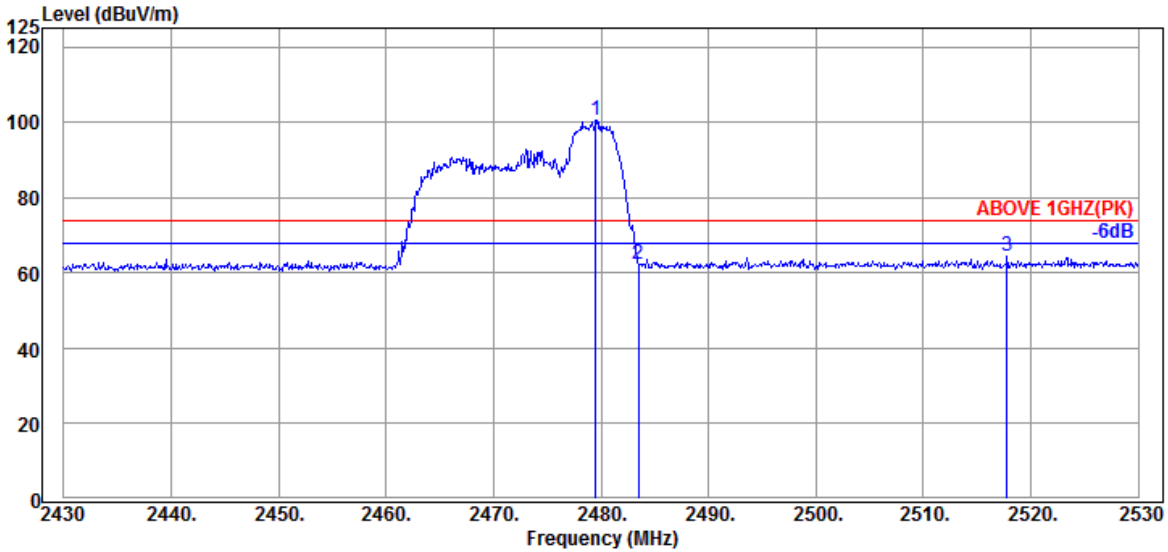

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	106.00	100.40	---	---	Peak
2483.500	28.47	5.87	39.92	68.02	62.44	74.00	11.56	Peak
2517.800	28.59	5.93	39.93	69.91	64.50	74.00	9.50	Peak

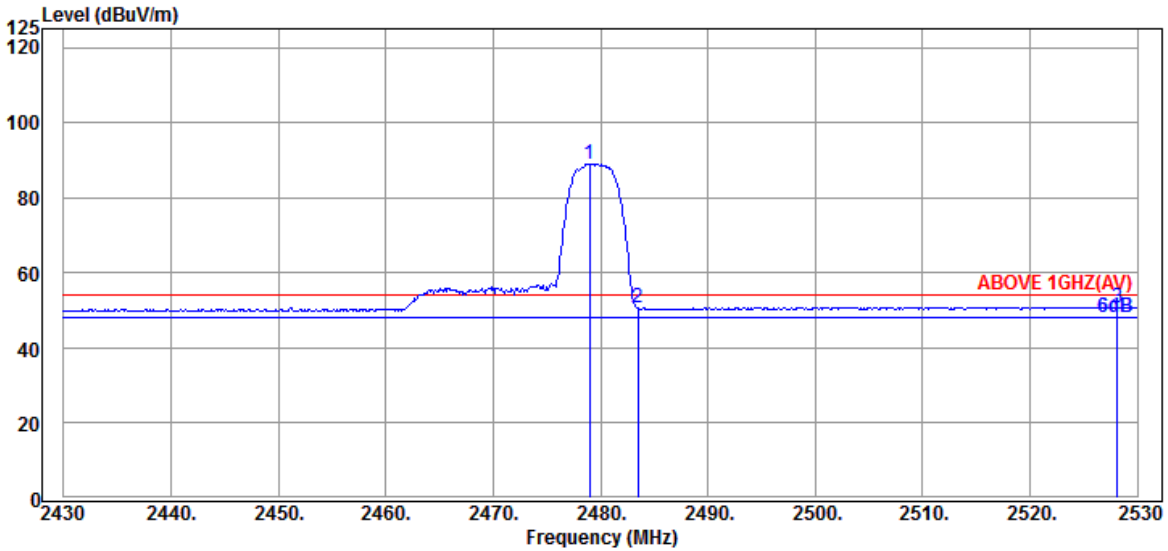


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	5.86	39.92	94.65	89.05	---	---	Average
2483.500	28.47	5.87	39.92	56.26	50.68	54.00	3.32	Average
2528.100	28.67	5.96	39.93	56.19	50.89	54.00	3.11	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

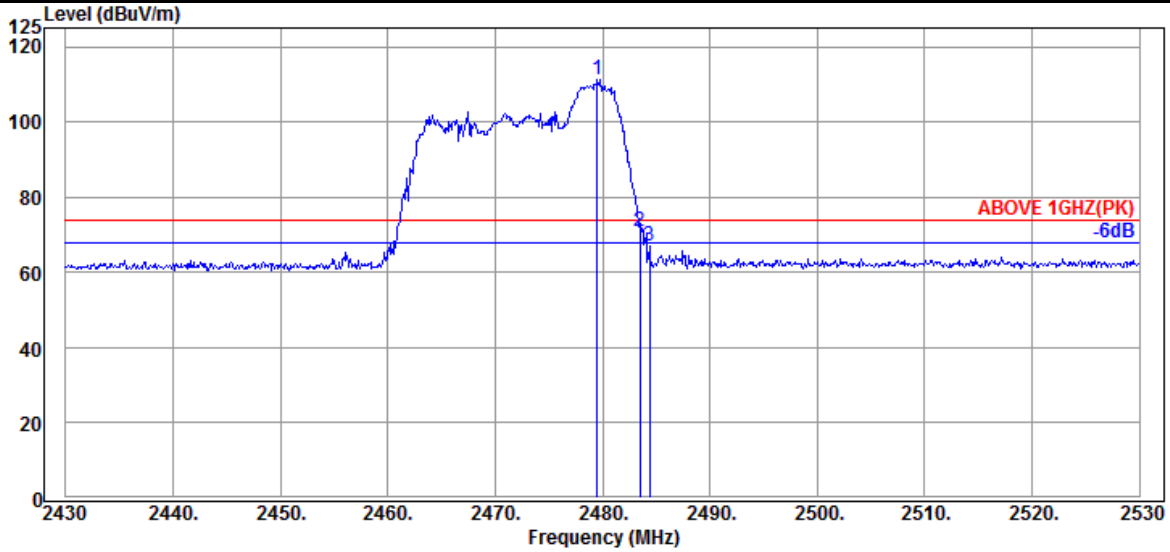

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	116.92	111.32	---	---	Peak
2483.500	28.47	5.87	39.92	76.49	70.91	74.00	3.09	Peak
2484.400	28.47	5.87	39.92	72.41	66.83	74.00	7.17	Peak

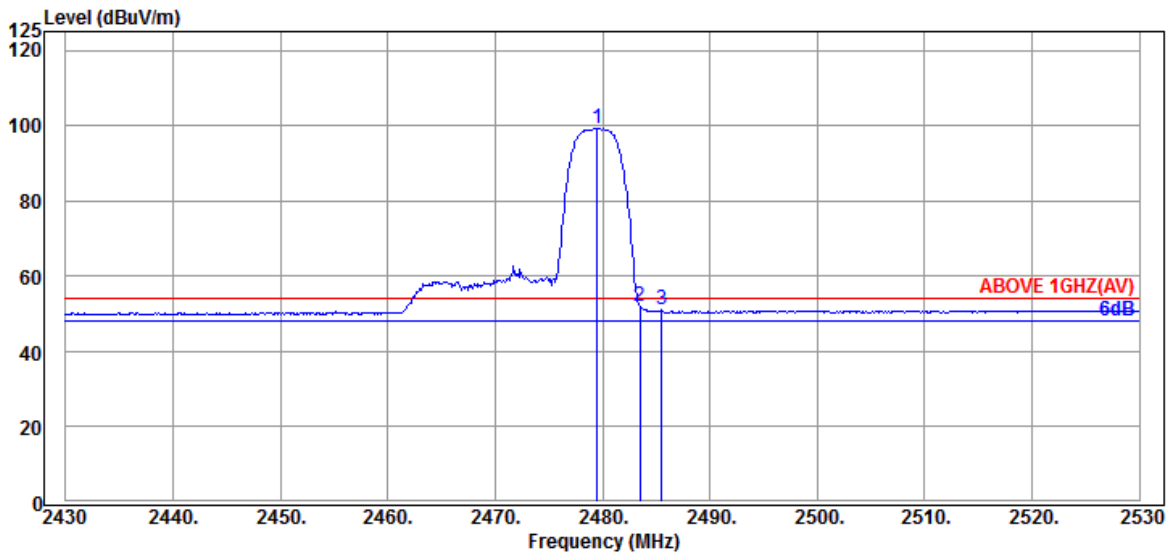


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	104.79	99.19	---	---	Average
2483.500	28.47	5.87	39.92	57.71	52.13	54.00	1.87	Average
2485.500	28.47	5.87	39.92	56.50	50.92	54.00	3.08	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

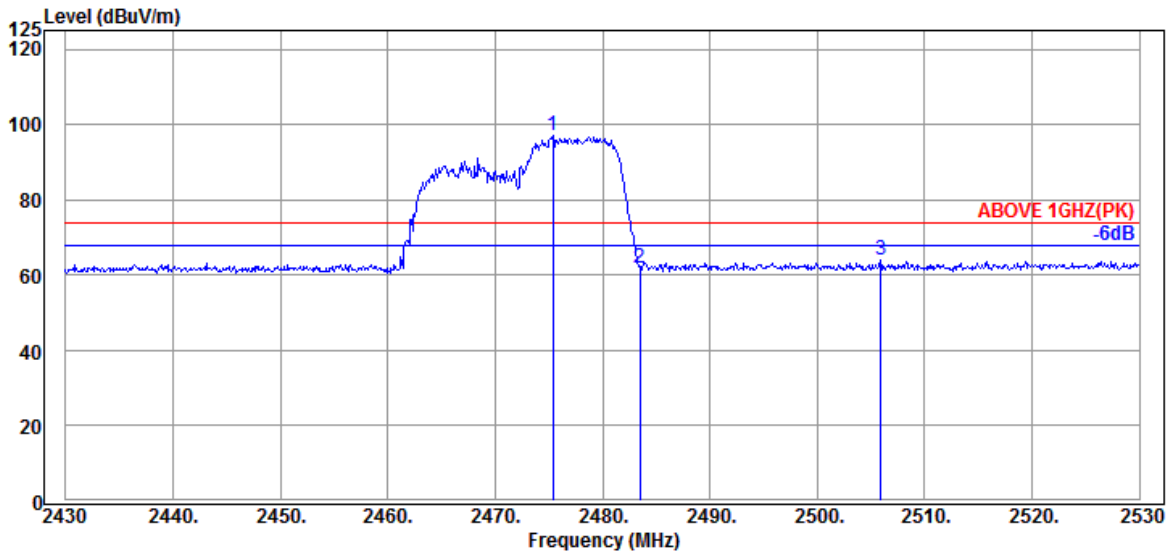

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.400	28.46	5.86	39.92	102.47	96.87	---	---	Peak
2483.500	28.47	5.87	39.92	67.51	61.93	74.00	12.07	Peak
2505.900	28.54	5.91	39.92	69.36	63.89	74.00	10.11	Peak

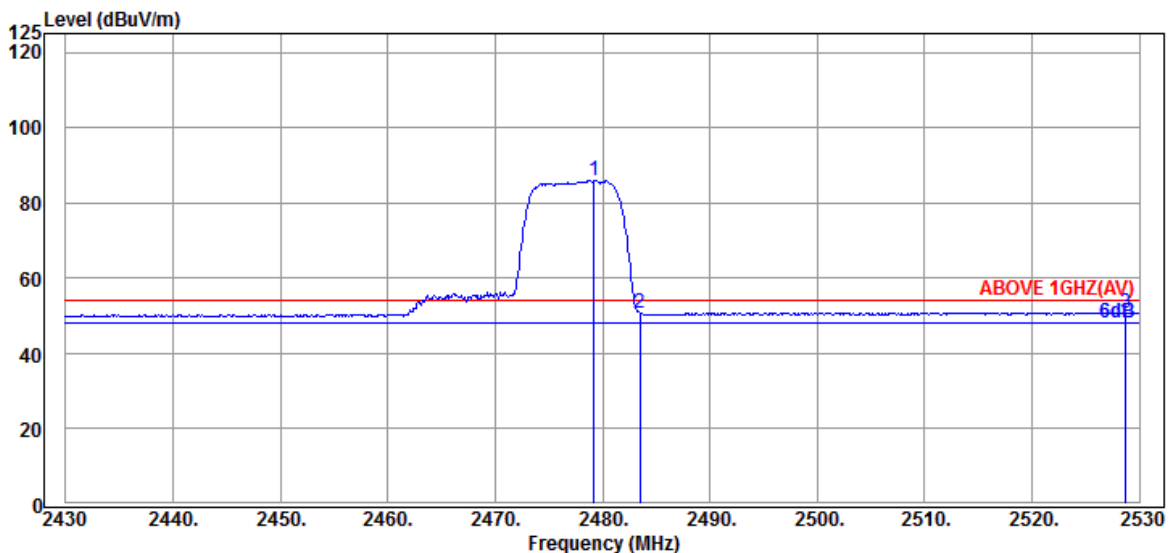


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	5.86	39.92	91.58	85.98	---	---	Average
2483.500	28.47	5.87	39.92	56.18	50.60	54.00	3.40	Average
2528.700	28.67	5.96	39.93	56.16	50.86	54.00	3.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

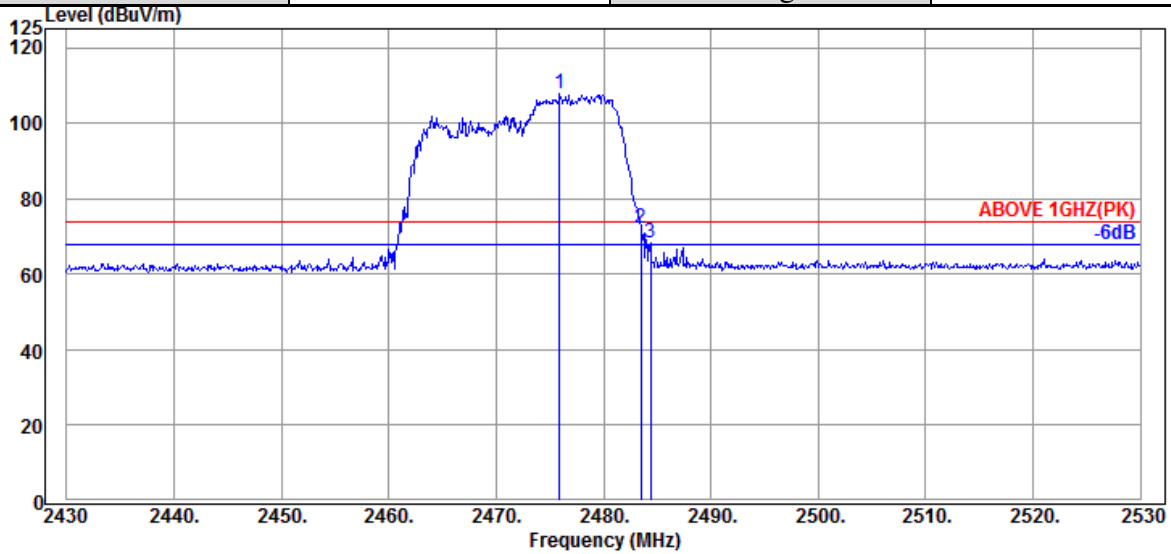

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	28.46	5.86	39.92	113.56	107.96	---	---	Peak
2483.500	28.47	5.87	39.92	77.86	72.28	74.00	1.72	Peak
2484.400	28.47	5.87	39.92	74.03	68.45	74.00	5.55	Peak

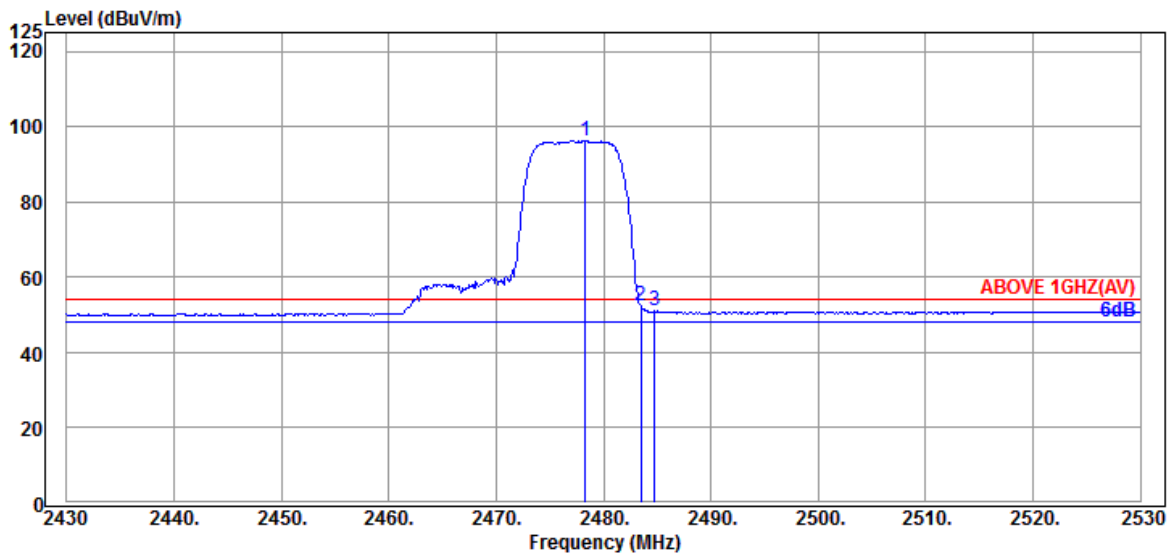


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	28.46	5.86	39.92	101.83	96.23	---	---	Average
2483.500	28.47	5.87	39.92	57.83	52.25	54.00	1.75	Average
2484.800	28.47	5.87	39.92	56.52	50.94	54.00	3.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

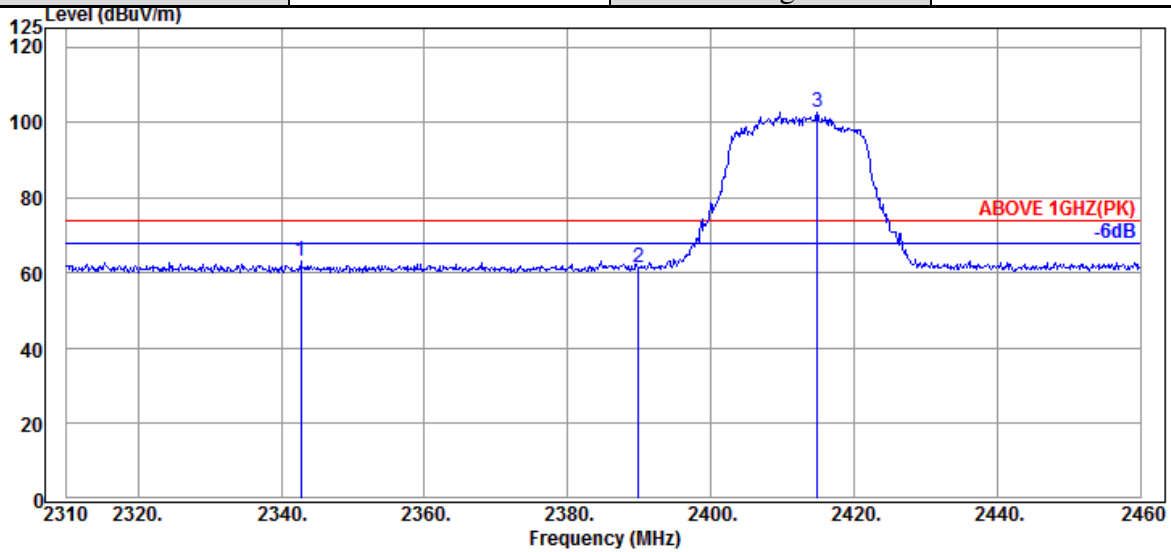

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.700	28.45	5.65	39.93	68.84	63.01	74.00	10.99	Peak
2389.950	28.21	5.72	39.93	67.46	61.46	74.00	12.54	Peak
@ 2414.850	28.19	5.76	39.93	108.77	102.79	---	---	Peak

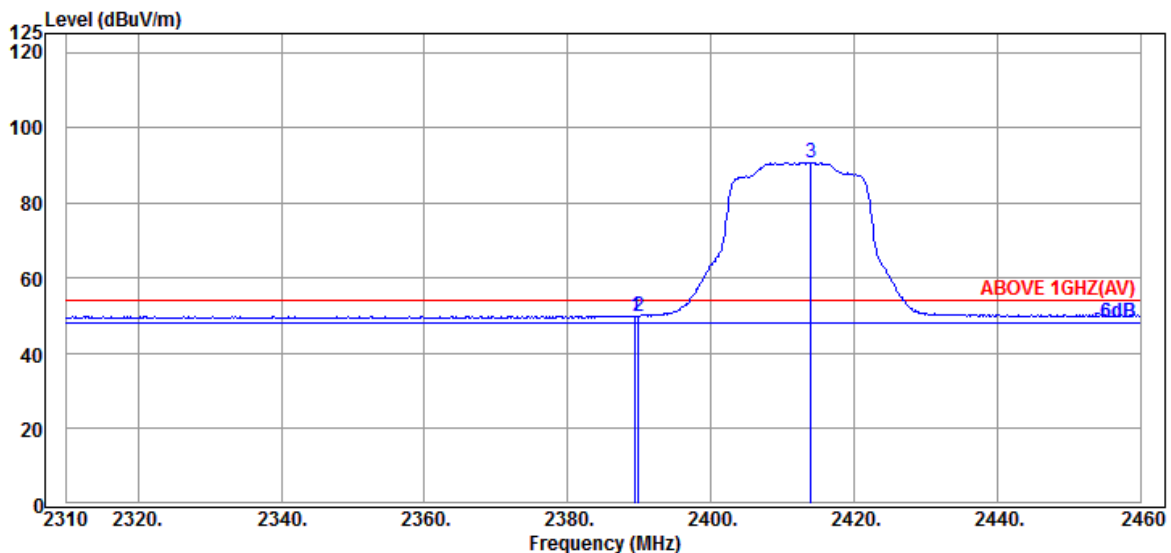


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.21	5.72	39.93	56.02	50.02	54.00	3.98	Average
2389.950	28.21	5.72	39.93	55.88	49.88	54.00	4.12	Average
@ 2413.950	28.19	5.76	39.93	96.65	90.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

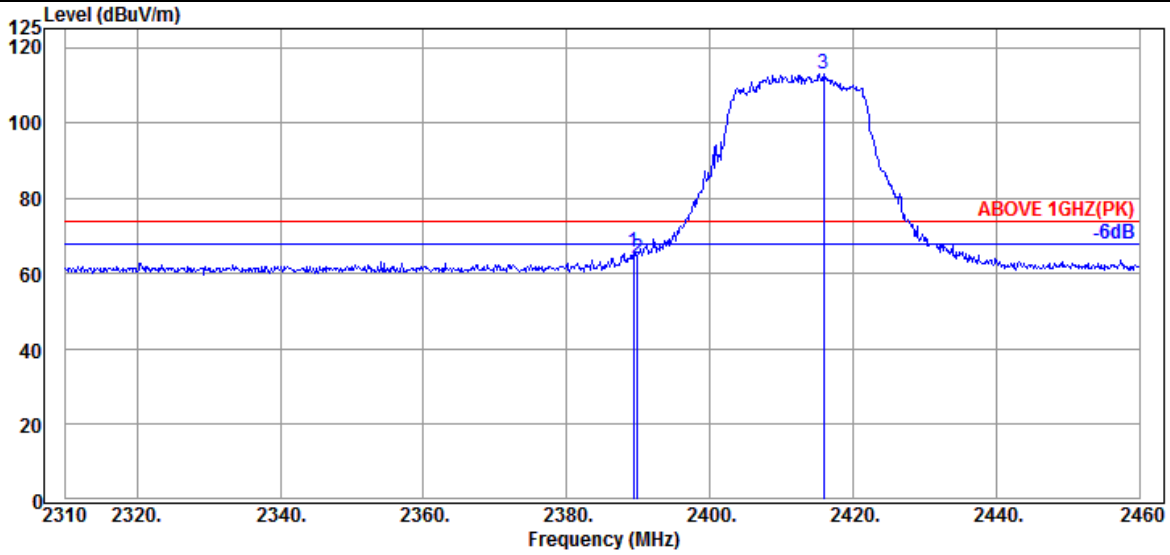

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.21	5.72	39.93	71.83	65.83	74.00	8.17	Peak
2389.950	28.21	5.72	39.93	70.08	64.08	74.00	9.92	Peak
@ 2415.900	28.19	5.76	39.93	119.01	113.03	---	---	Peak

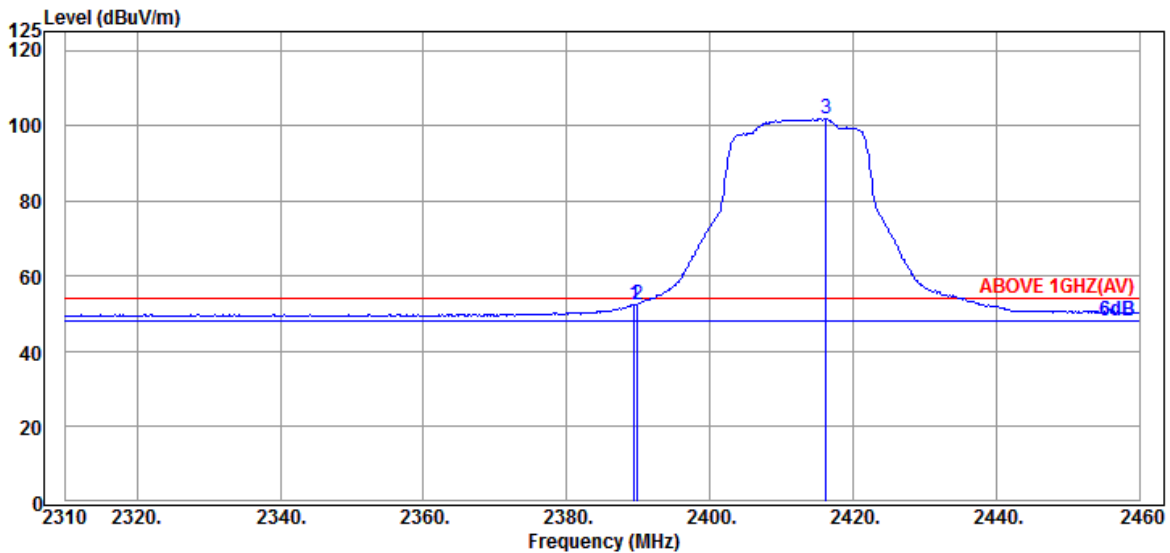


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.21	5.72	39.93	58.44	52.44	54.00	1.56	Average
2389.950	28.21	5.72	39.93	58.49	52.49	54.00	1.51	Average
@ 2416.200	28.19	5.76	39.93	107.90	101.92	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

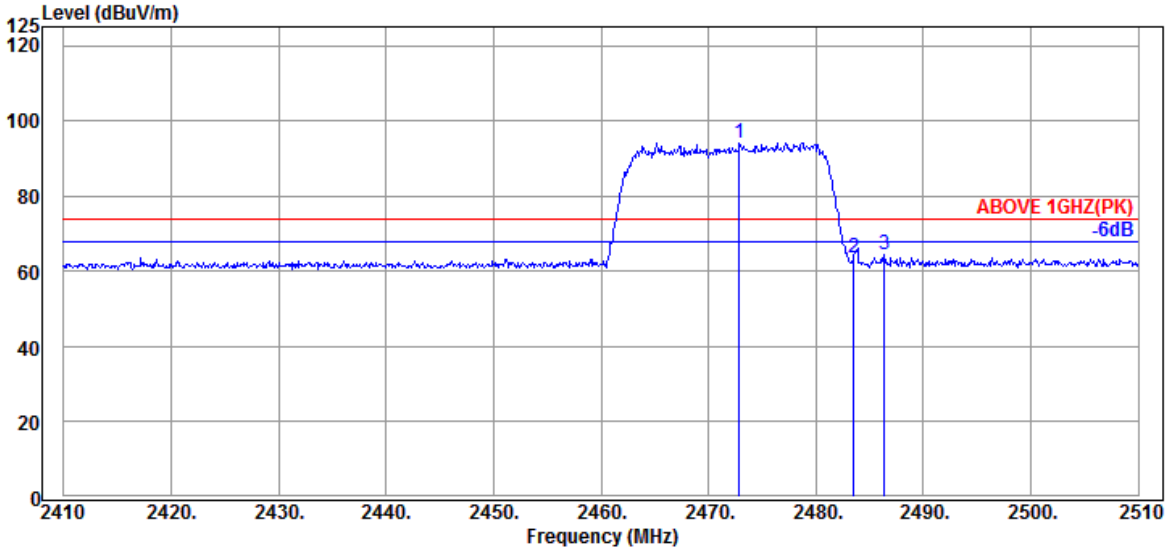

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	28.44	5.85	39.92	99.66	94.03	---	---	Peak
2483.500	28.47	5.87	39.92	69.17	63.59	74.00	10.41	Peak
2486.400	28.47	5.87	39.92	69.86	64.28	74.00	9.72	Peak

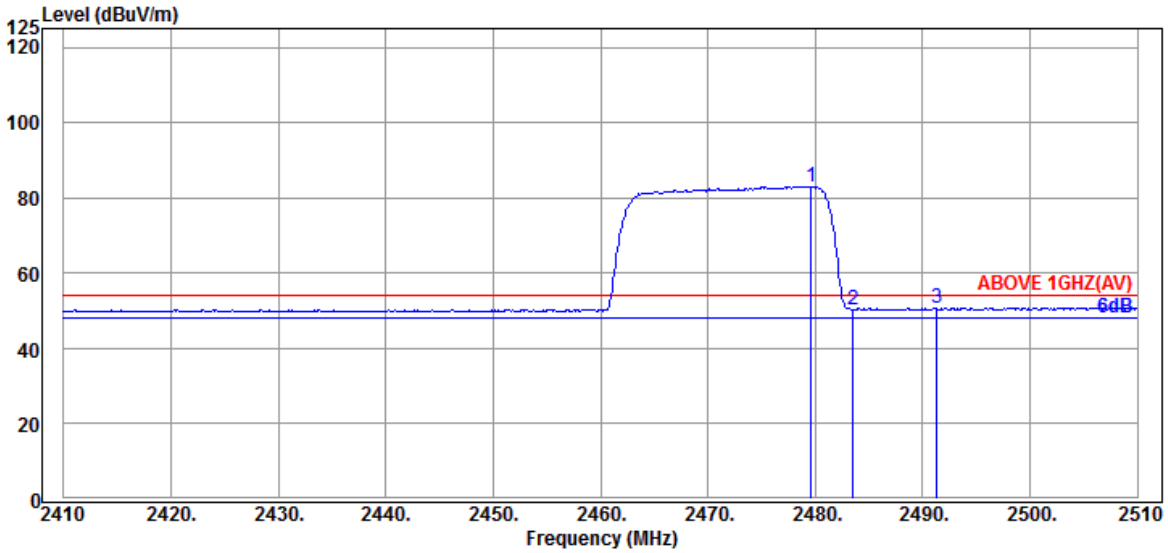


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.46	5.86	39.92	88.69	83.09	---	---	Average
2483.500	28.47	5.87	39.92	55.90	50.32	54.00	3.68	Average
2491.300	28.49	5.88	39.92	56.24	50.69	54.00	3.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

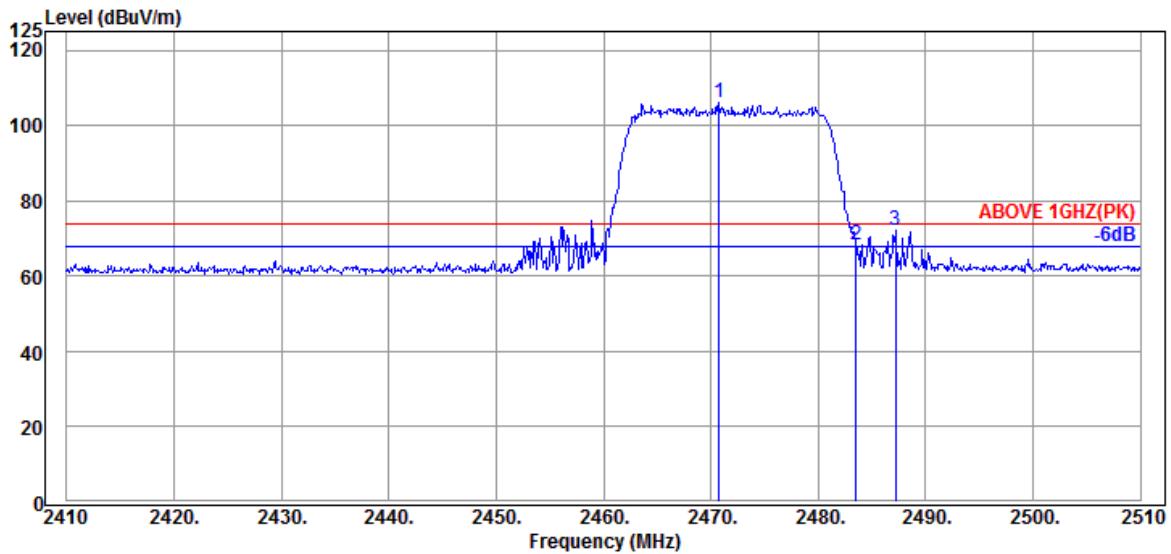

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	5.85	39.92	111.59	105.96	---	---	Peak
2483.500	28.47	5.87	39.92	73.70	68.12	74.00	5.88	Peak
2487.200	28.47	5.87	39.92	77.59	72.01	74.00	1.99	Peak

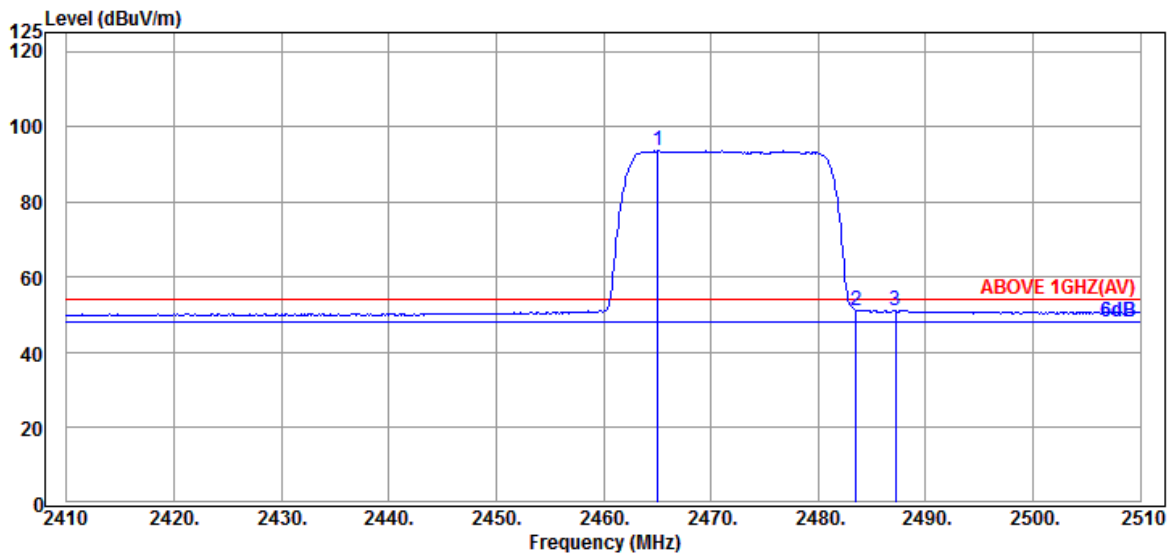


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.43	5.84	39.92	99.23	93.58	---	---	Average
2483.500	28.47	5.87	39.92	56.82	51.24	54.00	2.76	Average
2487.200	28.47	5.87	39.92	56.78	51.20	54.00	2.80	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

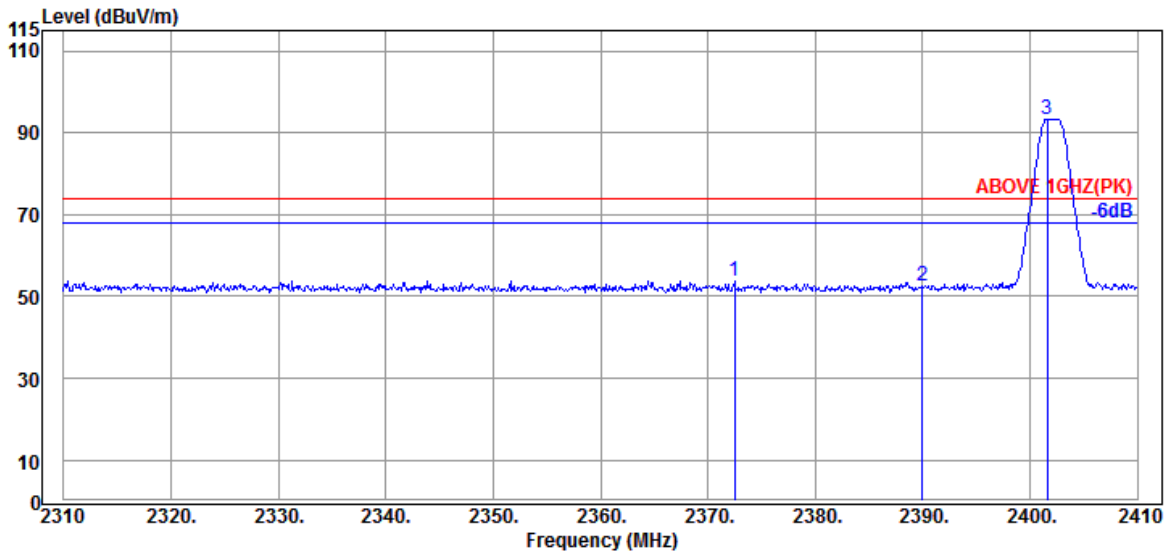

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.500	28.33	5.70	39.93	59.62	53.72	74.00	20.28	Peak
2390.000	28.21	5.72	39.93	58.64	52.64	74.00	21.36	Peak
@ 2401.600	28.10	5.74	39.93	99.53	93.44	---	---	Peak

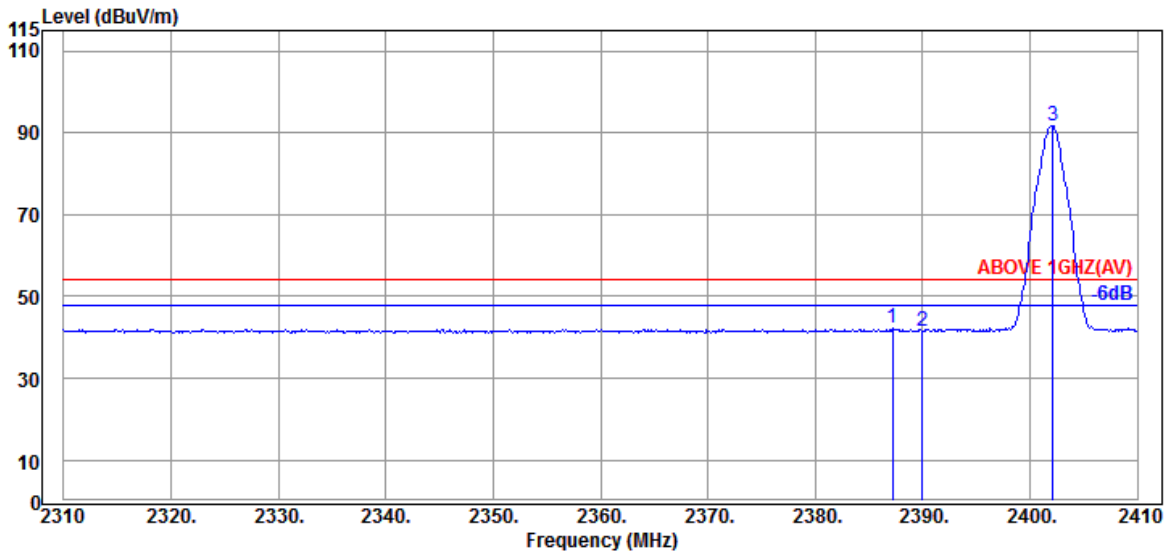


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.21	5.72	39.93	48.11	42.11	54.00	11.89	Average
2390.000	28.21	5.72	39.93	47.62	41.62	54.00	12.38	Average
@ 2402.100	28.10	5.74	39.93	97.67	91.58	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

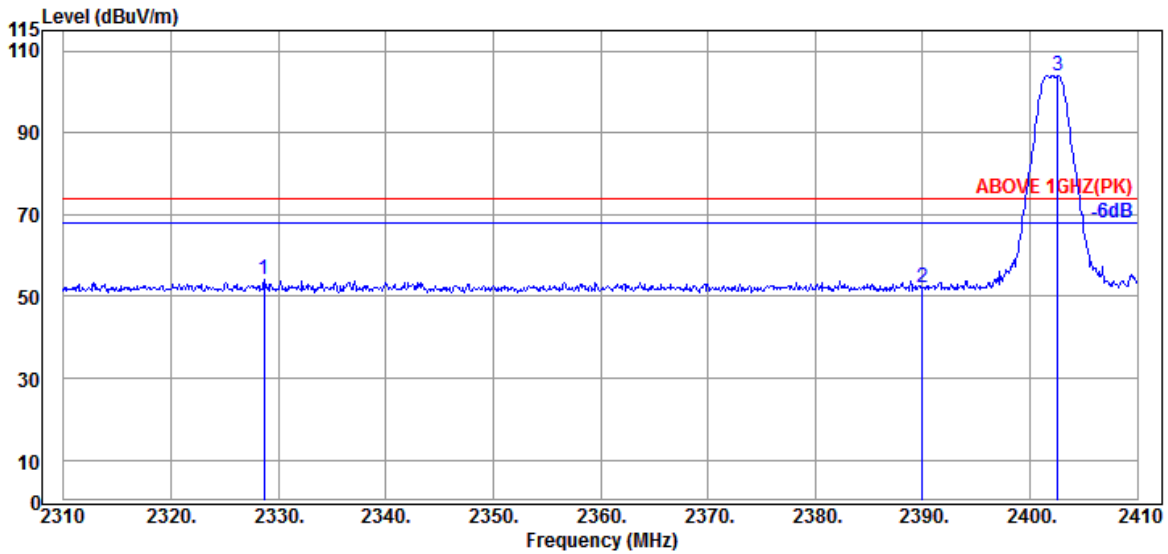

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.700	28.30	5.62	39.94	60.19	54.17	74.00	19.83	Peak
2390.000	28.21	5.72	39.93	57.99	51.99	74.00	22.01	Peak
@ 2402.600	28.10	5.74	39.93	109.93	103.84	---	---	Peak

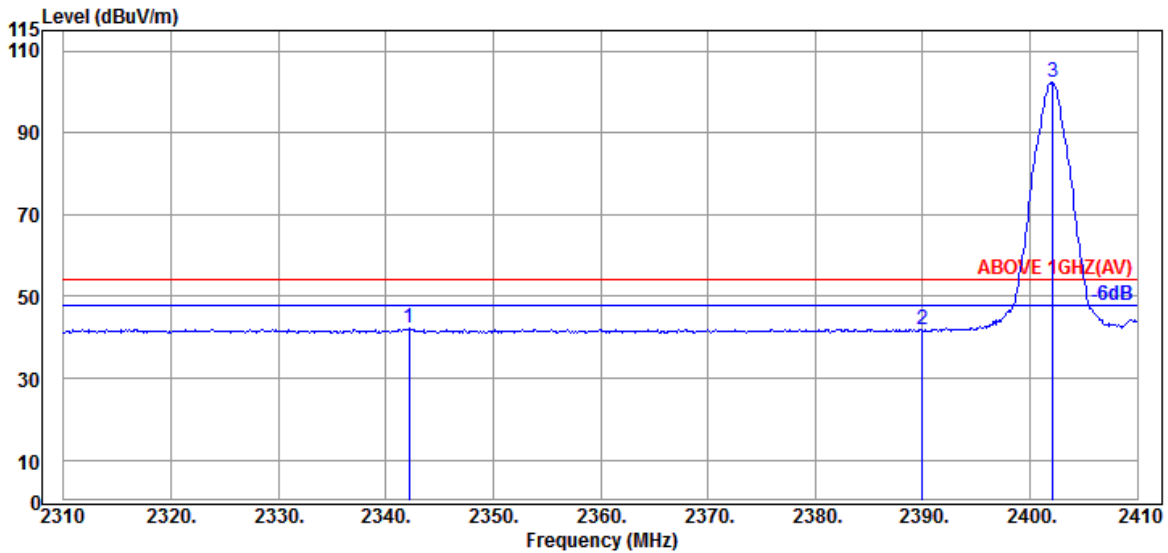


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.200	28.40	5.64	39.93	48.00	42.11	54.00	11.89	Average
2390.000	28.21	5.72	39.93	47.86	41.86	54.00	12.14	Average
@ 2402.100	28.10	5.74	39.93	108.37	102.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

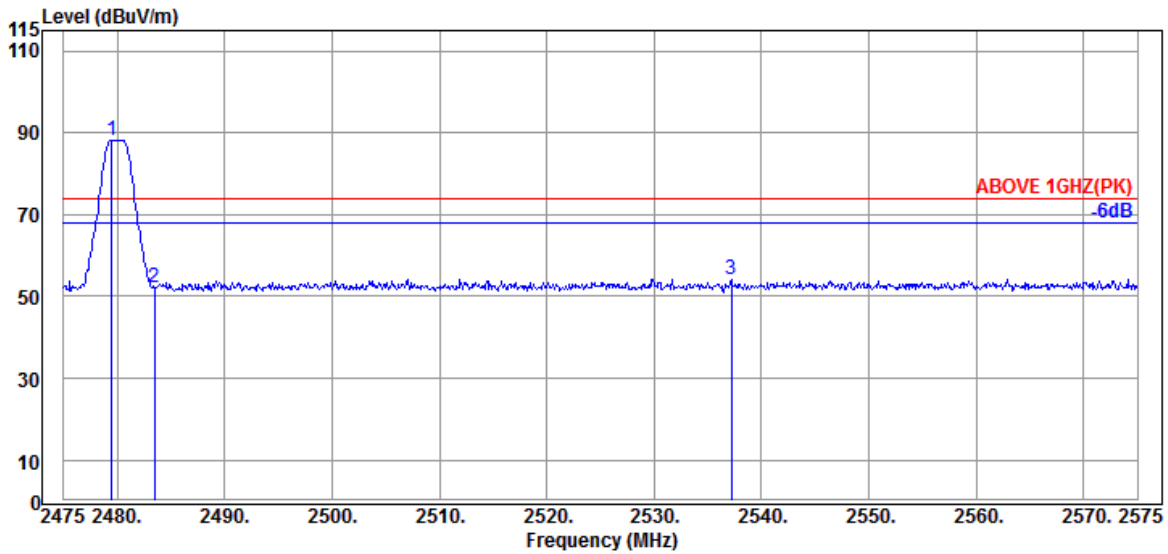

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.46	5.86	39.92	93.90	88.30	---	---	Peak
2483.500	28.47	5.87	39.92	57.84	52.26	74.00	21.74	Peak
2537.200	28.71	5.98	39.93	59.47	54.23	74.00	19.77	Peak

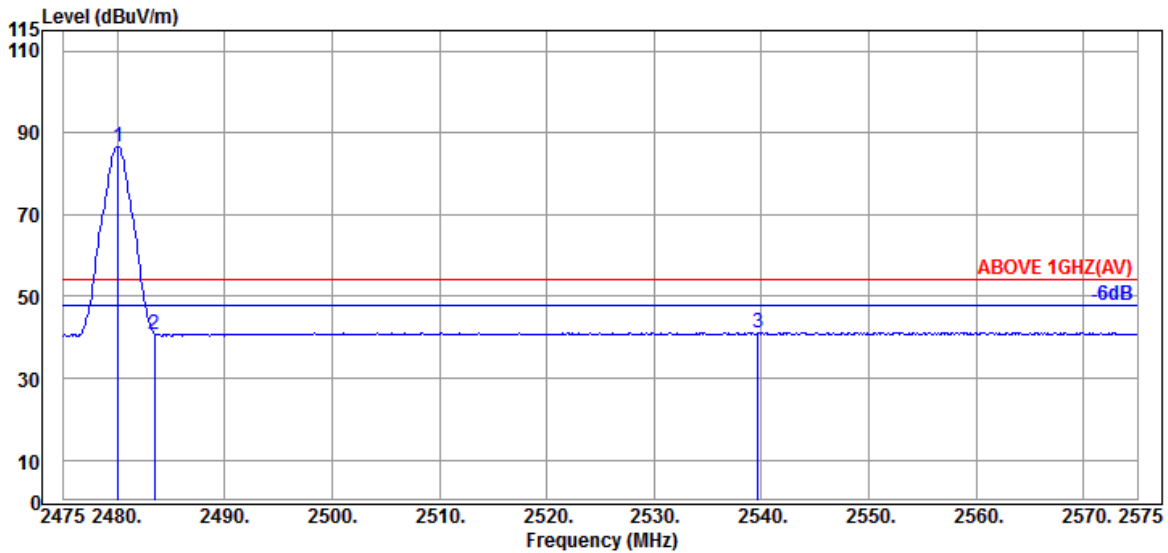


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	28.46	5.86	39.92	92.27	86.67	---	---	Average
2483.500	28.47	5.87	39.92	46.30	40.72	54.00	13.28	Average
2539.700	28.71	5.98	39.93	46.50	41.26	54.00	12.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

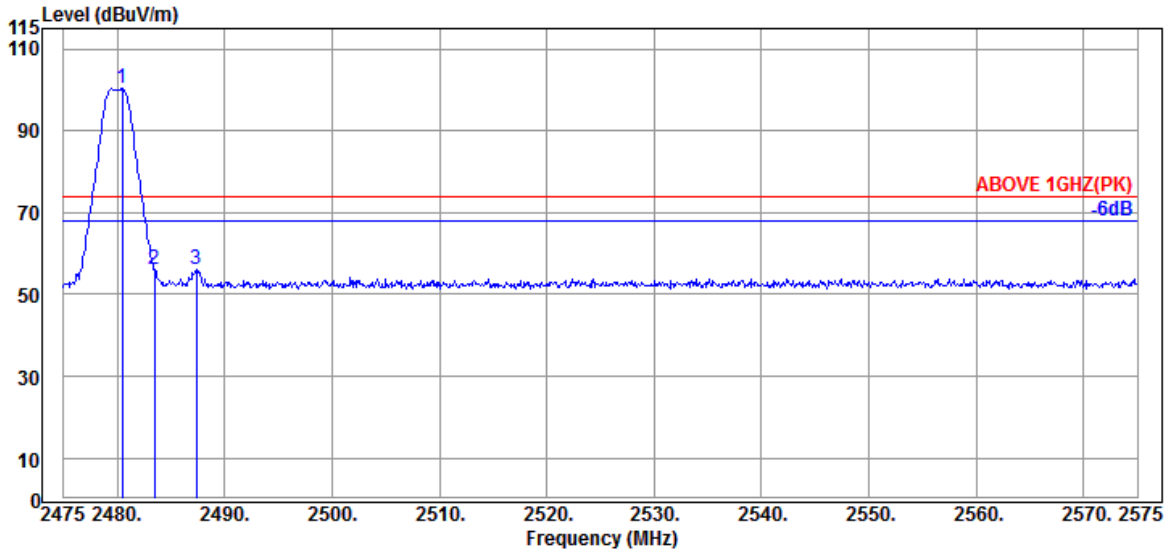

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	5.86	39.92	105.89	100.29	---	---	Peak
2483.500	28.47	5.87	39.92	61.52	55.94	74.00	18.06	Peak
2487.400	28.47	5.87	39.92	61.82	56.24	74.00	17.76	Peak

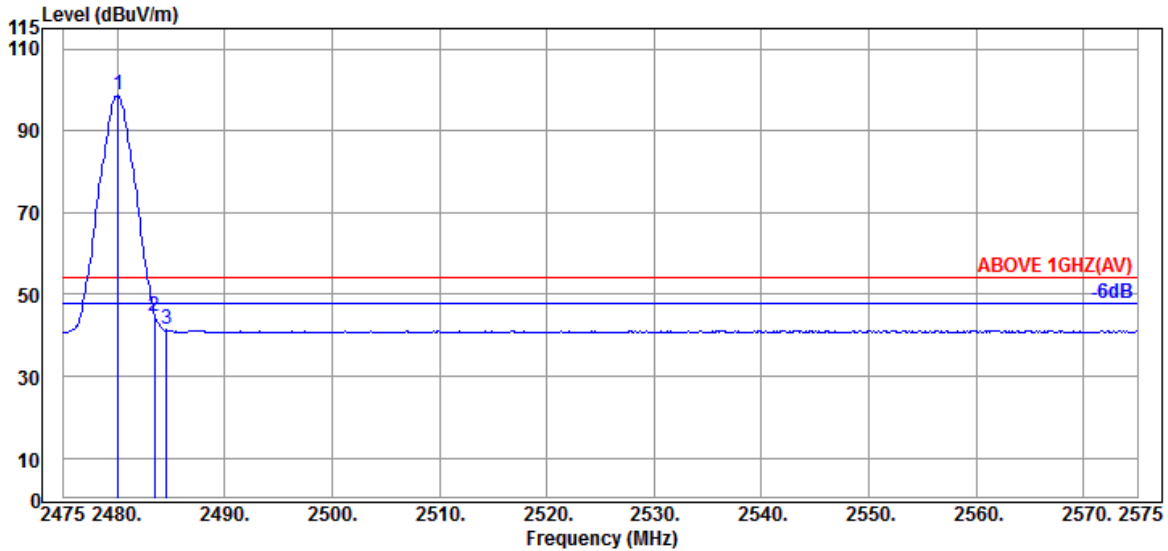

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	5.86	39.92	104.23	98.63	---	---	Average
2483.500	28.47	5.87	39.92	50.40	44.82	54.00	9.18	Average
2484.600	28.47	5.87	39.92	46.91	41.33	54.00	12.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	39.08	41.62	54.00	12.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.70	44.24	54.00	9.76	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	38.44	40.98	54.00	13.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	40.86	43.40	54.00	10.60	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	39.48	42.02	54.00	11.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	40.59	43.13	54.00	10.87	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	38.00	40.54	54.00	13.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.58	44.12	54.00	9.88	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	38.94	41.48	54.00	12.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	40.70	43.24	54.00	10.76	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	38.90	41.44	54.00	12.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.41	43.95	54.00	10.05	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	38.25	40.39	54.00	13.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	39.01	41.15	54.00	12.85	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	39.34	41.81	54.00	12.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	38.60	41.07	54.00	12.93	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	38.75	41.58	54.00	12.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	38.38	41.21	54.00	12.79	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.