

# RF Test Report

## 13.56 MHz RFID

**Report No.** : FCCBVC1-WAY-P22090077-1R1  
**Customer** : LG Electronics Inc.  
**Customer Address** : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 451-713 Korea.  
**Manufacturer** : LG Electronics Nanjing New Technology Co., Ltd  
**Manufacturer Address:** 346, Yaoxin Road, Economic & Technical Development Zone, 210038 Nanjing, China  
**Use of Report** : Certification  
**Model Name (FCC)** : 24CR670N  
**Model Name (IC)** : 24CR670IK  
**FCC ID** : BEJNT-24CR670  
**IC** : 2703H-24CR670  
**Date of Test** : 2022.09.30 to 2022.10.26  
**Test Method Used** : FCC CFR 47 Part 15, Subpart C (§15.225)  
FCC CFR 47 Part 15, Subpart C (§15.215)  
RSS-210 Issue 10, December 2019, RSS-GEN Issue 5, April 2018  
**Testing Environment** : Refer to the Test Condition

**Test Result** :  Pass  Fail

**ISSUED BY:** BV CPS ADT Korea Ltd., EMC/RF Laboratory

**ADDRESS:** Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea 16675

**TEST LOCATION:** HeungAn-daero 49, DongAn-gu, Anyang-si, Gyeonggi-do, Korea, 14119

Tested by

Name : Donghwa Shin

Technical Manager

Name : Jungwoo Kim

2022. 12. 12

**BV CPS ADT Korea Ltd.**

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



**BUREAU**  
**VERITAS**

## RELEASE CONTROL RECORD

REPORT NO.	REASON FOR CHANGE	DATE ISSUED
FCCBVCI-WAY-P22090077-1	Original release	2022.10.31
FCCBVCI-WAY-P22090077-1R1	Family Series add note (page 8)	2022.12.12

# Table of Contents

<b>RELEASE CONTROL RECORD .....</b>	<b>2</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 DECISION RULES FOR STATEMENT OF CONFORMITY .....	6
1.2 MEASUREMENT UNCERTAINTY .....	6
<b>2 GENERAL INFORMATION .....</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT.....	7
2.2 DESCRIPTION OF TEST MODE.....	8
2.2.1 <i>Test Mode Applicability and Tested Channel Details</i> .....	9
2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	10
2.4 TEST EQUIPMENT.....	11
<b>3 TEST RESULTS .....</b>	<b>12</b>
3.1 ANTENNA REQUIREMENT.....	12
3.2 RADIATED EMISSION MEASUREMENT.....	13
3.2.1 <i>Regulation</i> .....	13
3.2.2 <i>Test Procedure</i> .....	14
3.3.3 <i>Deviation from Test Standard</i> .....	14
3.3.4 <i>Test Setup</i> .....	15
3.2.5 <i>Test Result of Radiated Spurious Emission</i> .....	16
3.3 FREQUENCY STABILITY .....	20
3.3.1 <i>Regulation</i> .....	20
3.3.2 <i>Test Procedure</i> .....	20
3.3.3 <i>Deviation from Test Standard</i> .....	20
3.3.4 <i>Test Setup</i> .....	20
3.3.5 <i>Test Result</i> .....	21
3.4 20dB BANDWIDTH & 99% OBW .....	22
3.4.1 <i>Regulation</i> .....	22
3.4.2 <i>Test Procedure</i> .....	22
3.4.3 <i>Deviation from Test Standard</i> .....	22
3.4.4 <i>Test Setup</i> .....	22
3.3.5 <i>Test Result</i> .....	23
3.5 AC CONDUCTED EMISSIONS (150 KHZ TO 30 MHZ) .....	24
3.5.1 <i>Regulation</i> .....	24
3.4.2 <i>Test Procedure</i> .....	24
3.4.3 <i>Deviation from Test Standard</i> .....	24



3.4.4 *Test Setup* ..... 25

3.4.5 *Test Result*..... 26

**APPENDIX – INFORMATION OF THE TESTING LABORATORIES** ..... 27

## 1 Summary of Test Results


The EUT has been tested according to the following specifications

Applied Standard : FCC Part 15, Subpart C 15.225/15.215), RSS-Gen Issue 5, RSS-210 Issue 9					
FCC Part Section(s)	RSS Section(s)	Test Description	Limit	Test Result	Reference
15.207	RSS- Gen [8.8]	AC Conducted Emissions (150 kHz – 30 MHz)	Meet the requirement of limit	PASS	Section 3.5
15.225(a)	RSS-210 B.6.a.i	The field strength of any emissions within the band 13.553-13.567 MHz	Meet the requirement of limit	PASS	Section 3.2
15.225(b)	RSS-210 B.6.a.ii	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Meet the requirement of limit	PASS	Section 3.2
15.225(c)	RSS-210 B.6.a.iii	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Meet the requirement of limit	PASS	Section 3.2
15.225(d)	RSS-Gen	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Meet the requirement of limit	PASS	Section 3.2
15.225(e)	RSS-210 B.6.b	The frequency tolerance	Meet the requirement of limit	PASS	Section 3.3
15.225(c)	RSS-Gen 6.7	20 dB Bandwidth & 99 % Bandwidth	Meet the requirement of limit	PASS	Section 3.4

### NOTES

- 1) The general test methods used to test on this devices are ANSI C63.10.
- 2) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- 3) According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz.  
Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

## 1.1 Decision Rules for Statement of Conformity

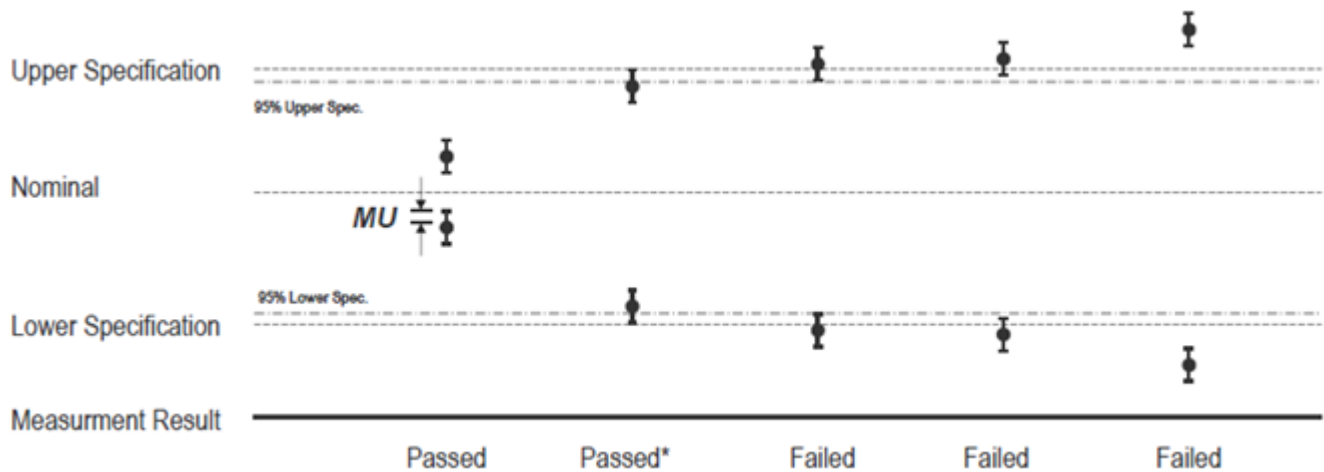

**QUA-52 Decision Rule(QA Document) was applied.**

**Step 1) :** Reference Check, Daily Check, Peripheral device Check

**Step 2) :** Re-test Procedure (Repeat the test maximum 3 times, Different Test Engineer)

- 1) If the original test results are subject to retesting and the judgement is unclear, the retest is carried out.
- 2) If the result of the first retest is the same as the initial test, the judgement is made based on the value.
- 3) If the result of the first retest differ from the results of the initial test, the second re-test is carried out.
- 4) After completion of the second retest, the average of the three test results is determined as the final result. However, if the deviation of the three test values is more than 5 % of the reference value, the technical manager should review the reproducibility of the test from the beginning.

## 1.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty $U = kU_c (k = 2)$
Conducted Emissions at main ports	150 kHz – 30 MHz	2.99
Radiated Spurious Emissions	9 kHz – 30 MHz	1.92
	30 MHz – 1 GHz	4.00
	1 GHz – 18 GHz	5.68
	18 GHz – 26.5 GHz	5.24

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of  $k = 2$ .

## 2 General Information

### 2.1 General Description of EUT

<b>Product</b>	All-in-One Thin Client
<b>Brand</b>	LG Electronics Inc.
<b>Factory</b>	<b>LG Electronics Inc.</b> 168, Suchul-daero, Gumi-si, Gyeongsangbuk-do, 39368 Republic of Korea
	<b>LG Electronics Nanjing New Technology Co.,Ltd.</b> No. 346, Yaoxin Road, Economic & Technical Development Zone Nanjing 210038, P.R. China
	<b>LG Electronics Inc.</b> 77, Sanho-daero Gumi-si, Gyeongsangbuk-do, 39381, Republic of Korea
<b>FCC Model</b>	24CR670N
<b>IC Model</b>	24CR670IK
<b>Identification No. of EUT</b>	207NTHME4201
<b>FCC Series Model</b> <sup>Note 2</sup>	24CR670N, 24CR670NK, 24CR670W, 24CR671N, 24CR671NK, 24CR671W, 24CR671WK, 24CR670I, 24CR670IK, 24CR671I, 24CR671IK, 24CR670WK
<b>Model Difference</b>	Model difference based on CPU, OS, keyboard and mouse
<b>HVIN</b>	24CR670IK
<b>FVIN</b>	-
<b>Power Supply</b>	DC 19 V, Adaptor (Input: AC 100-240 V, 50/60 Hz, Output: DC 19 V)
<b>Modulation Type</b>	ASK
<b>Transfer Rate</b>	-
<b>Operating Frequency</b>	13.56 MHz
<b>Number of Channel</b>	1
<b>Output Power</b>	29.11 dB $\mu$ V
<b>Antenna Type</b>	Loop Coil Antenna
<b>Antenna Connector</b>	Internal
<b>H/W Version</b>	V1.3
<b>S/W Version</b>	V2.0

**NOTES**

- 1) The above equipment has been tested by **Bureau Veritas Consumer Products Services ADT Korea**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample’s RF characteristics under the conditions specified in this report.
- 2) These differences do not degrade the radio.
- 3) The following antennas were provided to the EUT.

Antenna	Type	Connector	Peak Gain (dBi)
			13.56 MHz
RFID	Loop Coil Antenna	Internal	-

4) **List of Accessories**

Accessories	Brand	Model	Manufacturer	Specification
-	-	-	-	-

5) **Auxiliary test equipment**

Accessories	Brand	Model	Manufacturer	Specification
-	-	-	-	-

**2.2 Description of Test Mode**

**[Test Channel of EUT]**

Channel	Frequency [MHz]
1	13.56



## 2.2.1 Test Mode Applicability and Tested Channel Details

Following channel(s) was(were) selected for the final test as listed below :

EUT Configure mode	Applicable to					Description
	RE < 1G	RE ≥ 1G	PLC	FS	EB	
A	√	√	√	-	√	Powered by Adaptor
B	-	-	-	-	-	Powered by DC Power Supply

Where RE ≥ 1 G : Radiated Emission above 1 GHz  
 RE < 1 G : Radiated Emission below 1 GHz  
 PLC : Power Line Conducted Emission  
 FS : Antenna Port Conducted Measurement  
 EB : 20 dB Bandwidth

### Radiated Emission Test (Below 1 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1	1	ASK

### Power line Conducted Emission Test

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1	1	ASK

### Test Condition

Applicable to	Environmental Conditions	Test Voltage	Tested by
RE < 1G	(21.9 ± 2) °C, (46.5 ± 3) % R.H.	AC 230 V, 60 Hz	Donghwa Shin
RE ≥ 1G	(21.9 ± 2) °C, (46.5 ± 3) % R.H.	AC 230 V, 60 Hz	Donghwa Shin
PLC	(21.9 ± 2) °C, (46.5 ± 3) % R.H.	AC 230 V, 60 Hz	Donghwa Shin
FS	N/A	N/A	N/A
EB	N/A	N/A	N/A

## 2.3 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards.

**FCC CFR 47 Part 15, Subpart C (§15.225)**

**FCC CFR 47 Part 15, Subpart C (§15.215)**

**RSS-210 Issue 9, August 2016**

**ANSI C63.10-2013**

**RSS-GEN Issue 5, March 2019**

All test items in this test report have been performed and recorded as per the above standards.

## 2.4 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

	Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
■	Temperature & Humidity Chamber	Espec	PL-2J	15015910	2023-06-03
■	True-RMS Digital Multimeter	Fluke	177	43240434	2023-06-03
■	Termination	Warison	WTER-18S2	1	2022-11-24
■	VUBA 9117 Biconical VHF-UHF Broadband Antenna	Schwarzbeck	VUBA 9117	403	2023-12-22
■	Signal Conditioning Unit	R&S	SCU08F2	08400015	2022-11-23
■	Active Loop Antenna	R&S	HFH2-Z2E	349806	2023-02-18
■	Trilog Antenna (with 6 dB ATT.)	Schwarzbeck	VULB 9163	01199	2023-02-22
■	EMI Test Receiver	R&S	ESW8	101170	2022-11-24
■	EMI Test Receiver	R&S	ESW44	101812	2022-11-25
■	Spectrum Analyzer	R&S	FSV30	103017	2022-11-22

### 3 Test Results

#### 3.1 Antenna Requirement

**Except from §15.203 of the FCC Rules/Regulations:**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Permanently attached.
- There are no provisions for connection to an external antenna.

**Result**

The EUT complies with the requirement of §15.203

## 3.2 Radiated Emission Measurement

### 3.2.1 Regulation

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$   
Limit Line (dBuV/m) =  $20 \log \text{Emission level (uV/m)} + \text{Distance extrapolation factor}$
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 3.2.2 Test Procedure

#### Spurious Radiated Emissions

1. The preliminary radiated measurement were performed to determine the frequency producing the maximum emissions in an semi-anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1000 MHz using the Bi-Log antenna, and from 1000 MHz to 26500 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 x 4 meter in an semi-anechoic chamber. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector fuction with specified bandwidth.
6. The 0.8 m height is for below 1 GHz testing, and 1.5 m is for above 1GHz testing.

#### - Procedure for unwanted emissions measurements below 1 000 MHz


The procedure for unwanted emissions measurements below 1 000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.


### 3.2.3 Deviation from Test Standard

No deviation.

### 3.2.4 Test Setup

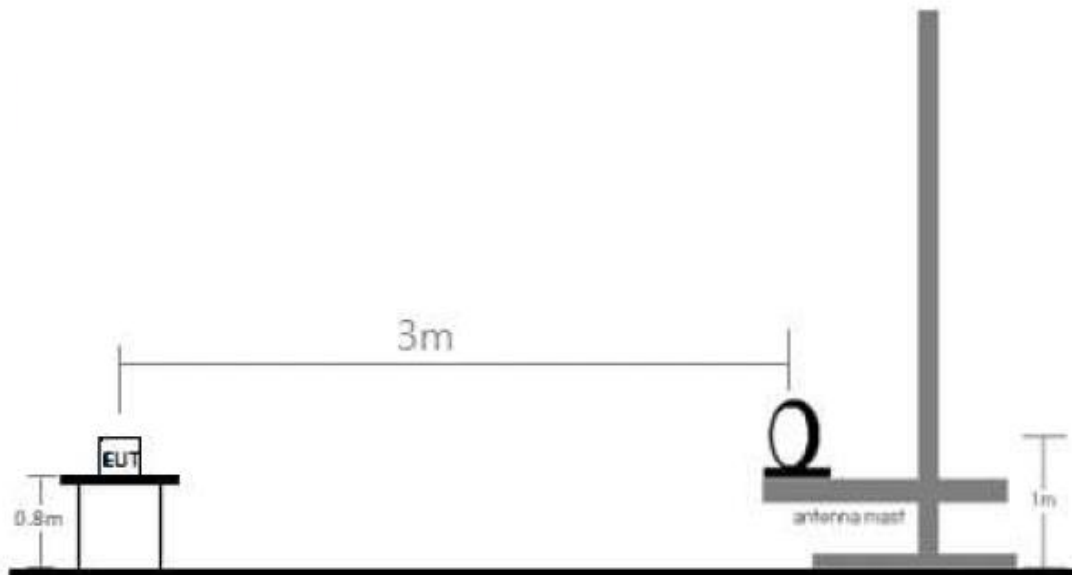

**[Radiated Emission Test Setup Below 30 MHz]**

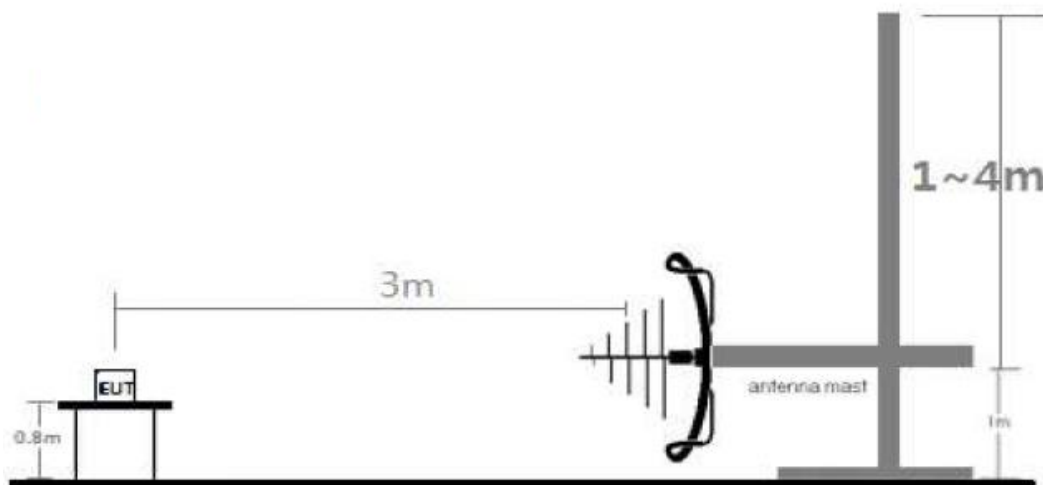


**[Radiated Emission Test Setup Below 1 GHz]**



### 3.2.5 Test Result of Radiated Spurious Emission

#### Field strength of Fundamental Emissions

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	In band frequency
Input Power	AC 230 V	Detector Function	Quasi-Peak
Environmental Conditions	21.9 deg. C, 49.5% RH	Tested By	Donghwa Shin

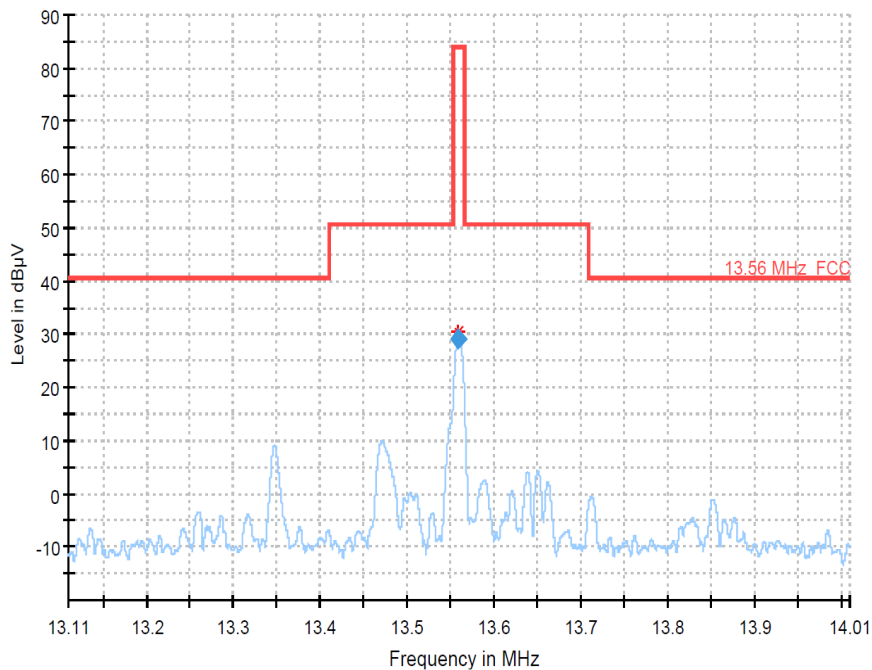

Antenna polarity & Test Distance : Loop Antenna 0 degree At 30m										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP dB(uV/m)	Limit QP dB(uV/m)	Margin QP[dB]	Hight (cm)	Angle (Deg)	Pass/Fail
1	13.56	0	11.51	-17.6	29.11	84	54.89	130	153	P

#### Remarks


1. Measurement Distance: 3 m
2. Factor(dB) = Antenna Factor(dB/m)+Amp.(dB)+Cable Loss(dB)+Distance Factor(dB)
3. Margin QP(dB) = Level QP((dBµV/m) – Limit QP(dBµV/m)
4. We tested three kind of Antenna Pol (Parallel, Perpendicular, Ground parallel) and reported worst case antenna Pol.





### Radiated Emissions (Below 30 MHz)

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	AC 230 V	Detector Function	Quasi-Peak
Environmental Conditions	21.9 deg. C, 49.5% RH	Tested By	Donghwa Shin

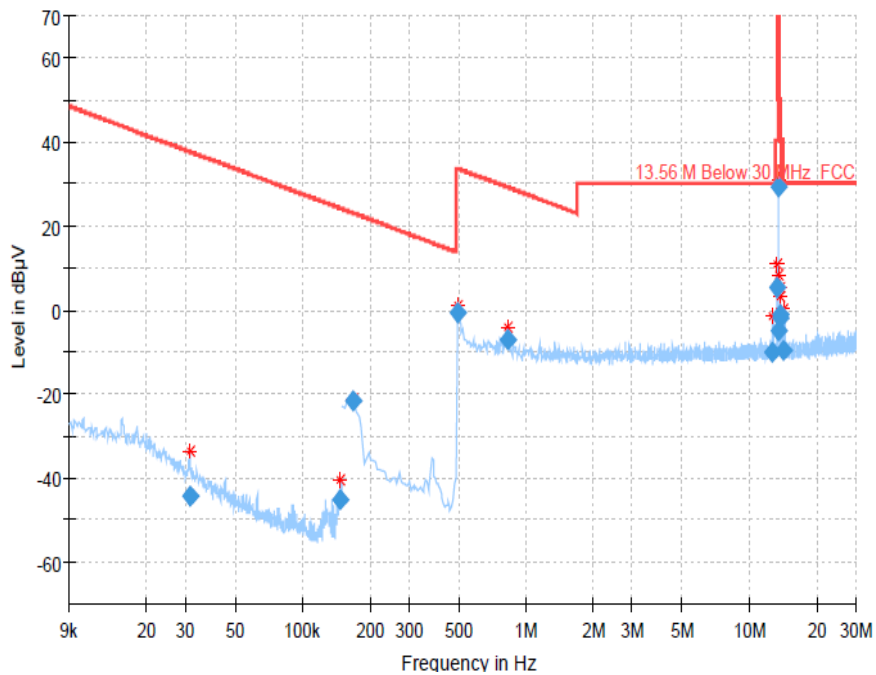

### FCC

Antenna polarity & Test Distance : Loop Antenna 0 degree At 3m										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP dB(uV/m)	Limit QP dB(uV/m)	Margin QP[dB]	Hight (cm)	Angle (Deg)	Pass/Fail
1	0.031	0	-103.67	-59.4	-44.27	37.71	81.97	130	358	P
2	0.147	0	-104.72	-59.4	-45.32	24.26	69.58	131	287	P
3	0.169	0	-81.01	-59.4	-21.61	23.06	44.67	132	279	P
4	0.490	0	-19.86	-19.3	-0.56	33.79	34.35	133	289	P
5	0.826	0	-26.46	-19.2	-7.26	29.26	36.52	134	284	P
6	12.710	0	-27.65	-17.7	-9.95	30	39.95	135	251	P
7	13.349	0	-12.15	-17.7	5.55	40.5	34.95	136	3	P
8	13.452	0	-22.39	-17.6	-4.79	50.5	55.29	137	251	P
9	13.694	0	-18.75	-17.6	-1.15	50.5	51.65	138	196	P
10	13.769	0	-19.53	-17.6	-1.93	40.5	42.43	139	227	P
11	14.110	0	-27.17	-17.6	-9.57	30	39.57	140	3	P



ISED

Antenna polarity & Test Distance : Loop Antenna 0 degree										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP dB(uA/m)	Limit QP dB(uA/m)	Margin QP[dB]	Hight (cm)	Angle (Deg)	Pass/Fail
1	0.031	0	-103.67	-59.4	-95.77	-13.79	81.97	130	358	P
2	0.147	0	-104.72	-59.4	-96.82	-27.24	69.58	131	287	P
3	0.169	0	-81.01	-59.4	-73.11	-28.44	44.67	132	279	P
4	0.490	0	-19.86	-19.3	-52.06	-17.71	34.35	133	289	P
5	0.826	0	-26.46	-19.2	-58.76	-22.24	36.52	134	284	P
6	12.710	0	-27.65	-17.7	-61.45	-21.5	39.95	135	251	P
7	13.349	0	-12.15	-17.7	-45.95	-11	34.95	136	3	P
8	13.452	0	-22.39	-17.6	-56.29	-1	55.29	137	251	P
9	13.694	0	-18.75	-17.6	-52.65	-1	51.65	138	196	P
10	13.769	0	-19.53	-17.6	-53.43	-11	42.43	139	227	P
11	14.110	0	-27.17	-17.6	-61.07	-21.5	39.57	140	3	P


Remarks

1. Peak(dBuV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB) + Distance Factor(dB)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Limit (dBμV/m) – (Quasi Peak) Result (dBμV/m)
4. dBuA/m = dBuV/m – 51.5 dB
5. We tested three kind of Antenna Pol (Parallel, Perpendicular, Ground parallel) and reported worst case antenna Pol.



## Radiated Emissions (Below 1 GHz)

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	AC 230 V	Detector Function	Quasi-Peak
Environmental Conditions	21.9 deg. C, 49.5% RH	Tested By	Donghwa Shin

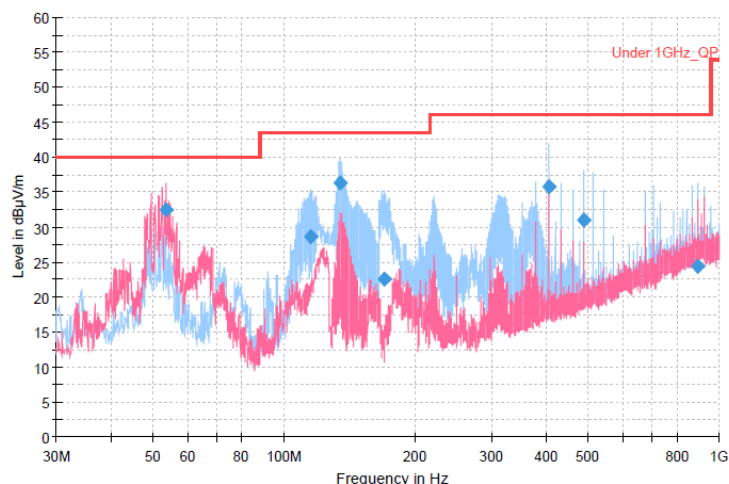

Antenna polarity & Test Distance : Loop Antenna 90 degree										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP dB(uV/m)	Limit QP dB(uV/m)	Margin QP[dB]	Hight (cm)	Angle (Deg)	Pass/Fail
1	53.571	V	13.59	-18.9	32.49	40	7.51	130	198	P
2	115.360	H	6.54	-22.1	28.64	43.52	14.89	131	154	P
3	134.760	H	11.86	-24.4	36.26	43.52	7.26	132	104	P
4	170.456	H	-1.09	-23.7	22.61	43.52	20.91	133	70	P
5	406.748	H	20.15	-15.6	35.75	46.02	10.27	134	-20	P
6	488.131	H	17.03	-14	31.03	46.02	14.99	135	320	P
7	895.046	H	16.32	-8.1	24.42	46.02	21.6	136	-20	P

### Remarks

- Quasi Peak(dBµV/m) = Quasi Peak Reading Value(dBµV/m) + Correction Factor(dB)
- Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin(dB) = (Quasi Peak) Limit (dBµV/m) – (Quasi Peak) Result (dBµV/m)

### 3.3 Frequency Stability

#### 3.3.1 Regulation

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 3.3.2 Test Procedure


Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeat step d with every 10 degrees reduction until the lowest temperature achieved.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 3.3.3 Deviation from Test Standard

No Deviation

#### 3.3.4 Test Setup

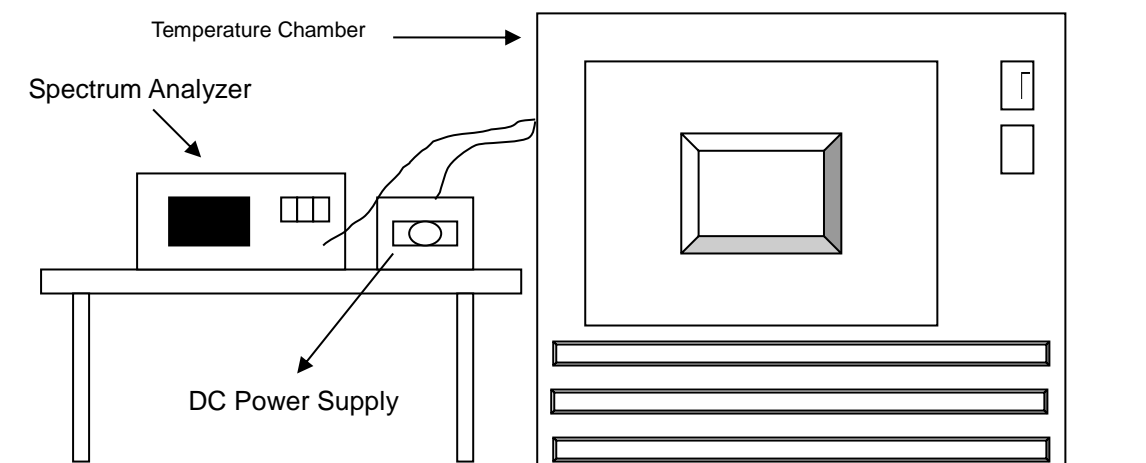

### 3.3.5 Test Result

Frequency Stability Versus Temp.				
Temp (°C)	(Vdc)	(MHz)	(Hz)	Devation (%)
50		13.55998	20	0.00015
40		13.55998	20	0.00015
30		13.56000	0	0.00000
20		13.55998	20	0.00015
10		13.56004	-40	-0.00029
0		13.56005	-50	-0.00037
-10		13.56005	-50	-0.00037
-20		13.56005	-50	-0.00037
20	HV	13.55998	20	0.00015
	LV	13.55998	20	0.00015

### 3.4 20dB Bandwidth & 99% OBW

#### 3.4.1 Regulation

The 20dB bandwidth shall be specified in operating frequency band.


#### 3.4.2 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### 3.4.3 Deviation from Test Standard

No deviation.



#### 3.4.4 Test Setup

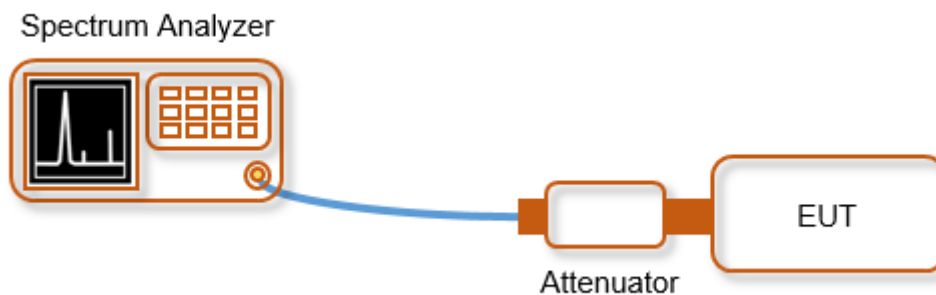



### 3.4.5 Test Result

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
13.56	4.916	15.617

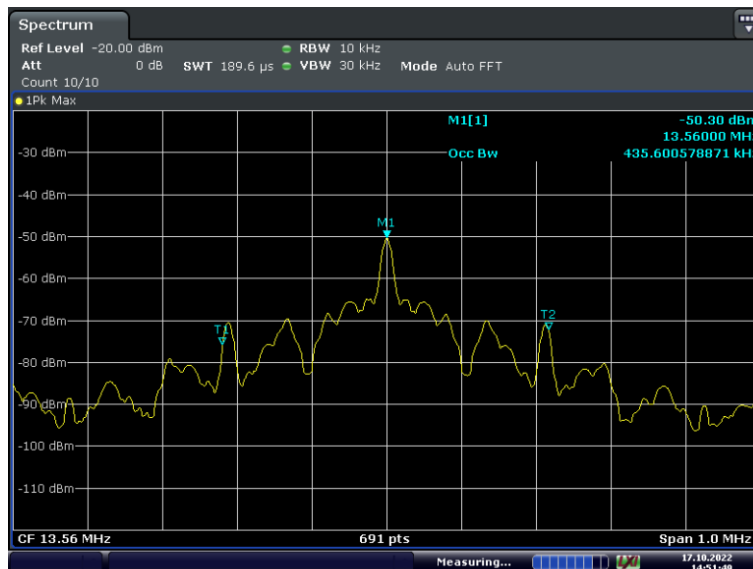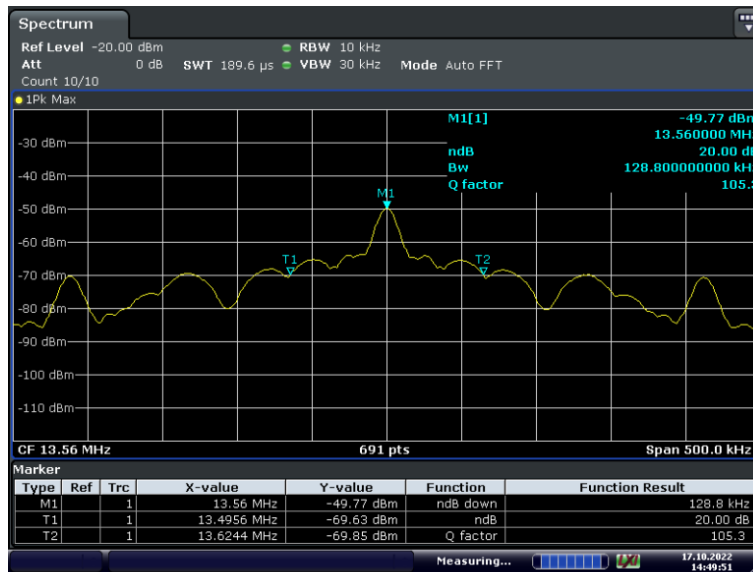

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

## 3.5 AC Conducted Emissions (150 kHz to 30 MHz)

### 3.5.1 Regulation

§15.207(a) : Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 3.5.2 Test Procedure

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50  $\mu$ H of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


**Remark :** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

### 3.5.3 Deviation from Test Standard


No deviation.



### 3.5.4 Test Setup

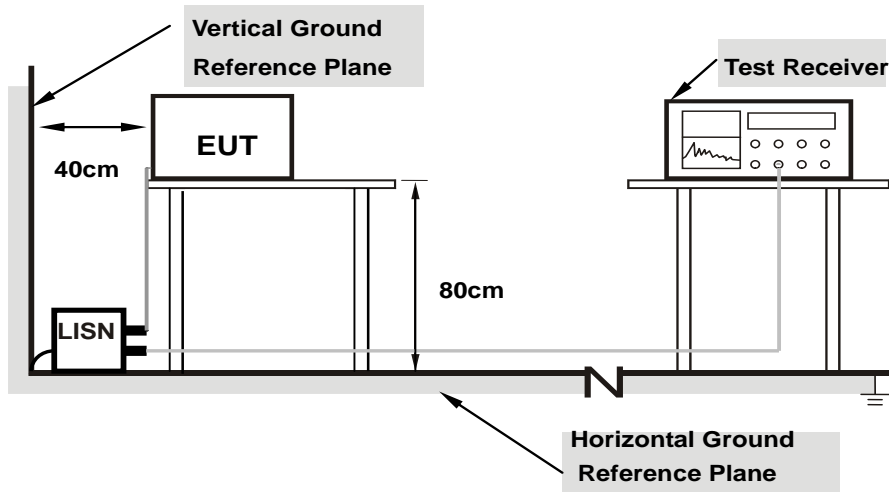

### 3.5.5 Test Result

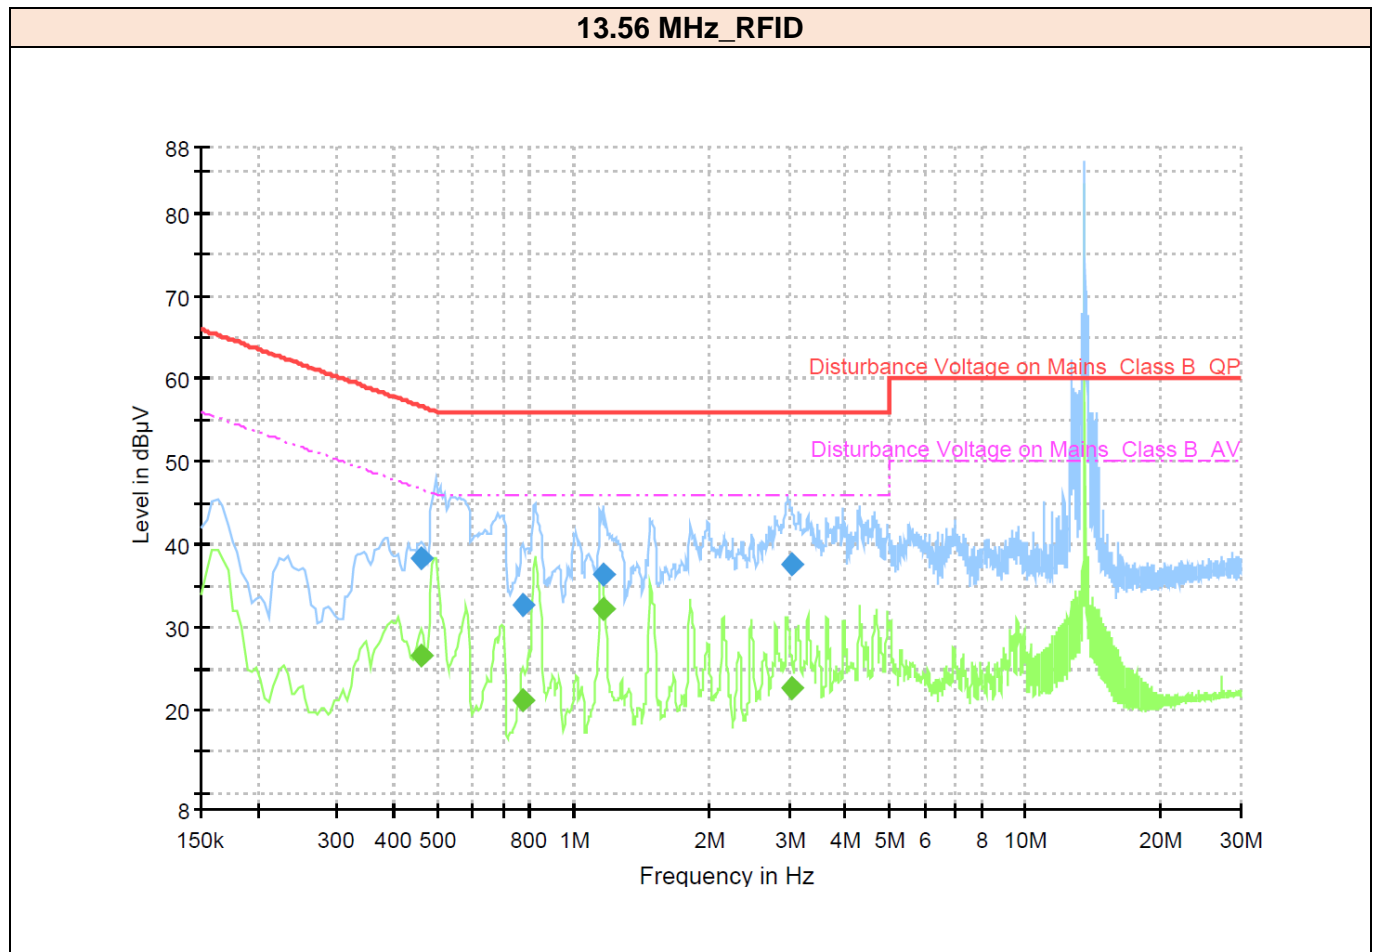

Frequency [MHz]	Quasi Peak Reading Value [dBuV]	Quasi Peak Result [dBuV]	CAV Reading Value [dBuV]	CAV Result [dBuV]	Line	Correction Factor [dB/m]	Quasi Peak Margin [dBuV]	Quasi Peak Limit [dBuV]	CAV Margin [dBuV]	CAV Limit [dBuV]
0.46	28.33	38.33	---	---	L1	10.00	18.37	56.70	---	---
0.46	---	---	16.66	26.66	L1	10.00	---	---	20.04	46.70
0.78	22.89	32.69	---	---	N	9.80	23.31	56.00	---	---
0.78	---	---	11.38	21.18	N	9.80	---	---	24.82	46.00
1.17	26.57	36.37	---	---	N	9.80	19.63	56.00	---	---
1.17	---	---	22.52	32.32	N	9.80	---	---	13.68	46.00
3.03	27.87	37.57	---	---	L1	9.70	18.43	56.00	---	---
3.03	---	---	12.90	22.60	L1	9.70	---	---	23.40	46.00

**Remarks**

- Final Value (QP and/or CAV) = Reading Value (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)  
Margin (QP and/or CAV) = Limit – Final Value (QP and/or CAV)  
QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor
- Two graphs measured for both Live (L1) and Neutral (N) of the LISN are combined into one graph.

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services Korea. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

**Test Firm Name : BV CPS ADT Korea Ltd.**

**Main Address : Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675 KOREA**

**Satellite Address : Bureau Veritas Bldg, HeungAn-daero 49, DongAn-gu, Anyang-si, Gyeonggi-do, 14119, KOREA**

### FCC

**Designation Number : KR0158**

**Test Firm Registration Number : 666061**

### ISED

**Designation Number : KR0158**

**Test Firm Registration Number : 25944 (Main)**

**Test Firm Registration Number : 26316 (Satellite)**

If you have any comments, please feel free to contact us at the following:

**Email:** [Meyer.Shin@bureauveritas.com](mailto:Meyer.Shin@bureauveritas.com)

**Web Site:** [www.bureauveritas.co.kr/cps/eaw](http://www.bureauveritas.co.kr/cps/eaw)

The address and road map of all our labs can be found in our web site also.

**- End of report -**