

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	153
A.2.3 Emissions in Non-restricted Frequency Bands.....	168
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	169
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	169
A.3.2 Measurement Plots	179
A.4 POWER SPECTRAL DENSITY	236
A.4.1 Power Spectral Density Result	236
A.4.2 Measurement Plots	245
A.5 FREQUENCY STABILITY	287
A.5.1 Frequency stability Result	287

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/04/28	Temp./Hum.	27°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

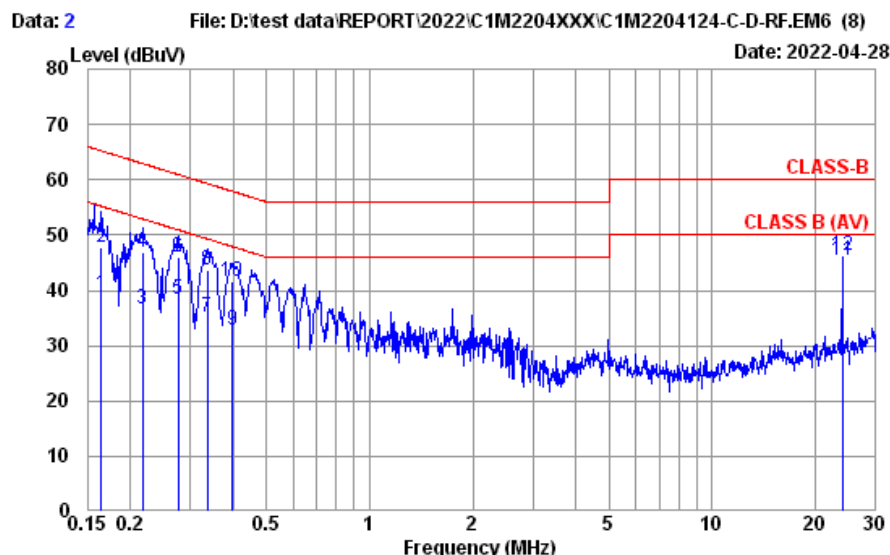

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EMI4200 (169)(A) | CE-08 | ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 27°C / 47% Engineer : Chucky Chiu
EUT Model : 14U70Q Test Rating : 120Vac/60Hz
Test Mode : Normal
#1


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.165	10.62	0.03	9.85	18.63	39.13	55.21	16.08	Average
2	0.165	10.62	0.03	9.85	27.13	47.63	65.21	17.58	QP
3	0.217	10.55	0.03	9.85	16.13	36.56	52.92	16.36	Average
4	0.217	10.55	0.03	9.85	26.49	46.92	62.92	16.00	QP
5	0.276	10.51	0.03	9.85	18.09	38.48	50.94	12.46	Average
6	0.276	10.51	0.03	9.85	25.68	46.07	60.94	14.87	QP
7	0.336	10.47	0.03	9.85	14.79	35.14	49.31	14.17	Average
8	0.336	10.47	0.03	9.85	23.42	43.77	59.31	15.54	QP
9	0.398	10.44	0.03	9.85	12.36	32.68	47.90	15.22	Average
10	0.398	10.44	0.03	9.85	21.35	41.67	57.90	16.23	QP
11	24.034	14.85	0.21	9.96	20.28	45.30	50.00	4.70	Average
12	24.034	14.85	0.21	9.96	21.27	46.29	60.00	13.71	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/04/28	Temp./Hum.	27°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

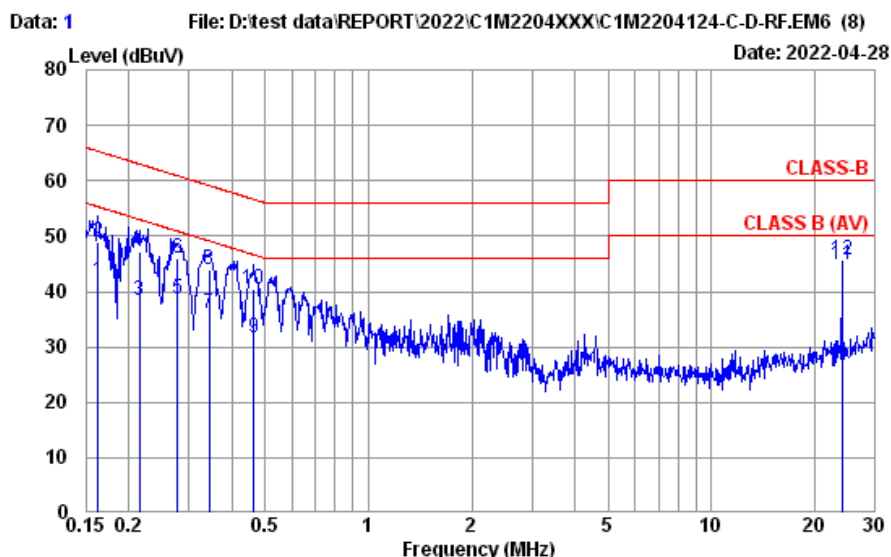

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV4200 (169)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 27°C / 47% Engineer : Chucky Chiu
EUT Model : 14U70Q Test Rating : 120Vac/60Hz
Test Mode : Normal
#1

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.58	0.03	9.85	21.34	41.80	55.34	13.54	Average
2	0.162	10.58	0.03	9.85	28.50	48.96	65.34	16.38	QP
3	0.215	10.53	0.03	9.85	18.02	38.43	53.01	14.58	Average
4	0.215	10.53	0.03	9.85	26.78	47.19	63.01	15.82	QP
5	0.277	10.48	0.03	9.85	18.39	38.75	50.90	12.15	Average
6	0.277	10.48	0.03	9.85	25.65	46.01	60.90	14.89	QP
7	0.343	10.45	0.03	9.85	15.65	35.98	49.13	13.15	Average
8	0.343	10.45	0.03	9.85	23.61	43.94	59.13	15.19	QP
9	0.464	10.42	0.03	9.85	11.43	31.73	46.63	14.90	Average
10	0.464	10.42	0.03	9.85	20.14	40.44	56.63	16.19	QP
11	24.034	14.11	0.21	9.96	20.53	44.81	50.00	5.19	Average
12	24.034	14.11	0.21	9.96	21.50	45.78	60.00	14.22	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/04/26 ~ 06/17	Temp./Hum.	22 ~ 23°C/58 ~ 66%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sam Chang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.43	26.49	28.32	26.52	40.00	13.48	Peak
148.340	16.41	3.18	26.00	41.80	35.39	43.50	8.11	Peak
445.160	22.21	6.33	26.77	35.09	36.86	46.00	9.14	Peak
593.570	24.23	7.08	27.39	35.88	39.80	46.00	6.20	Peak
741.980	25.30	7.89	27.36	34.84	40.67	46.00	5.33	Peak
975.750	26.94	9.17	26.72	28.97	38.36	54.00	15.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	21.22	1.55	26.48	41.28	37.57	40.00	2.43	Peak
148.340	16.41	3.18	26.00	40.95	34.54	43.50	8.96	Peak
445.160	22.21	6.33	26.77	35.47	37.24	46.00	8.76	Peak
593.570	24.23	7.08	27.39	36.91	40.83	46.00	5.17	Peak
741.980	25.30	7.89	27.36	35.08	40.91	46.00	5.09	Peak
965.080	26.85	9.11	26.75	29.53	38.74	54.00	15.26	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

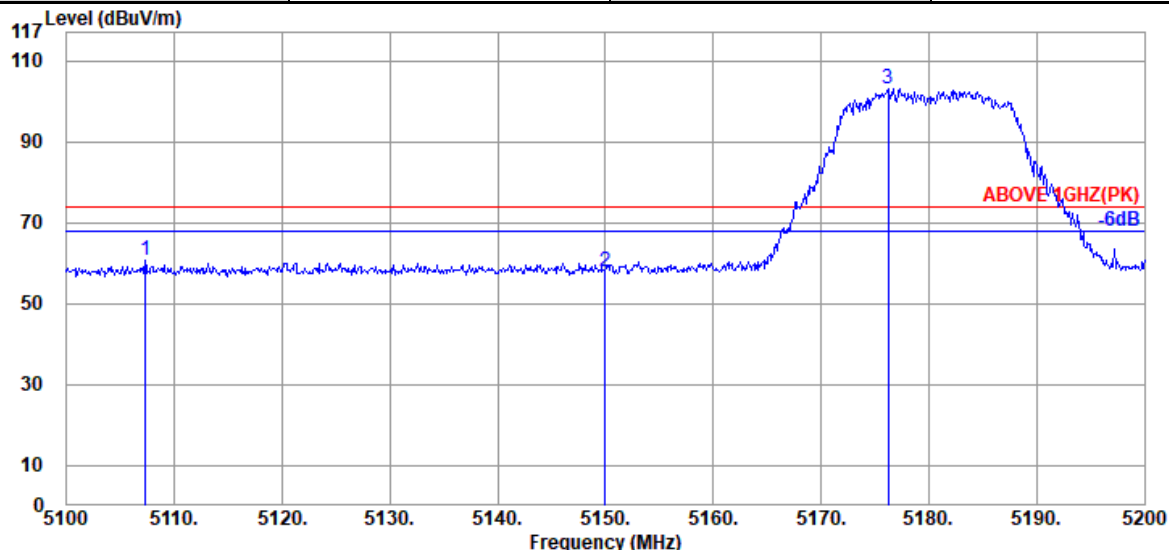

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.300	34.00	8.89	39.29	56.98	60.58	74.00	13.42	Peak
5150.000	34.20	8.92	39.29	54.24	58.07	74.00	15.93	Peak
@ 5176.200	34.33	8.95	39.28	99.16	103.16	---	---	Peak

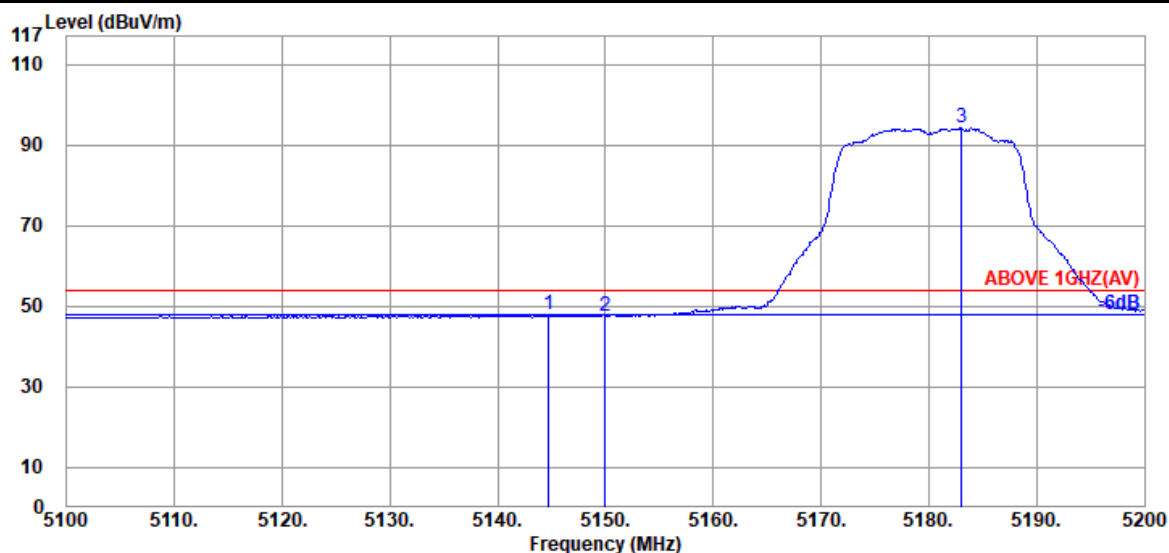


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	34.20	8.92	39.29	44.00	47.83	54.00	6.17	Average
5150.000	34.20	8.92	39.29	43.69	47.52	54.00	6.48	Average
@ 5183.000	34.33	8.95	39.28	90.10	94.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

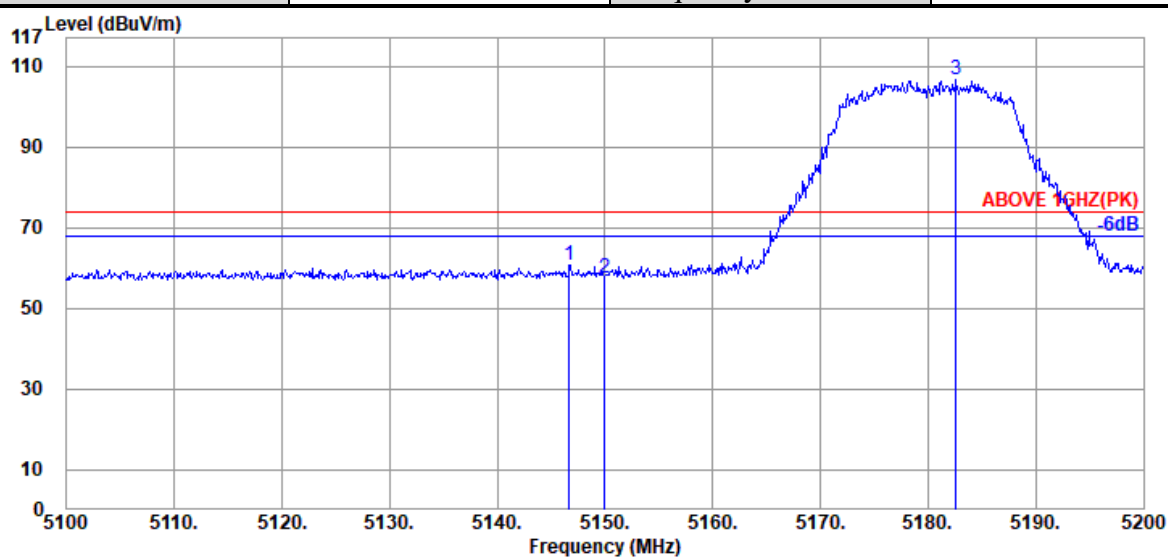

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.700	34.20	8.92	39.29	56.80	60.63	74.00	13.37	Peak
5150.000	34.20	8.92	39.29	53.72	57.55	74.00	16.45	Peak
@ 5182.600	34.33	8.95	39.28	102.75	106.75	---	---	Peak

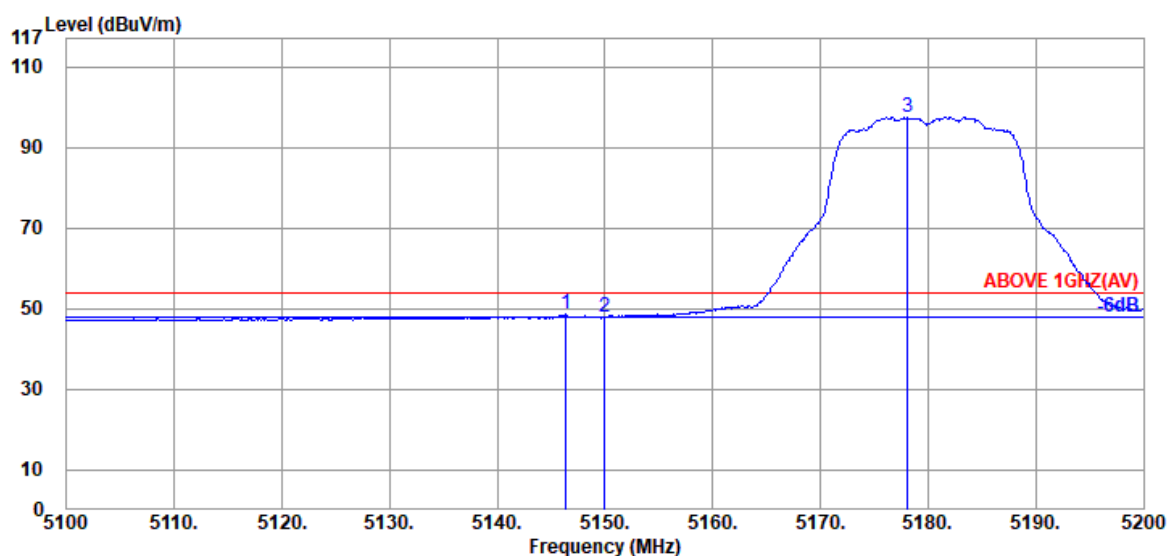


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.400	34.20	8.92	39.29	44.71	48.54	54.00	5.46	Average
5150.000	34.20	8.92	39.29	44.06	47.89	54.00	6.11	Average
@ 5178.100	34.33	8.95	39.28	93.48	97.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

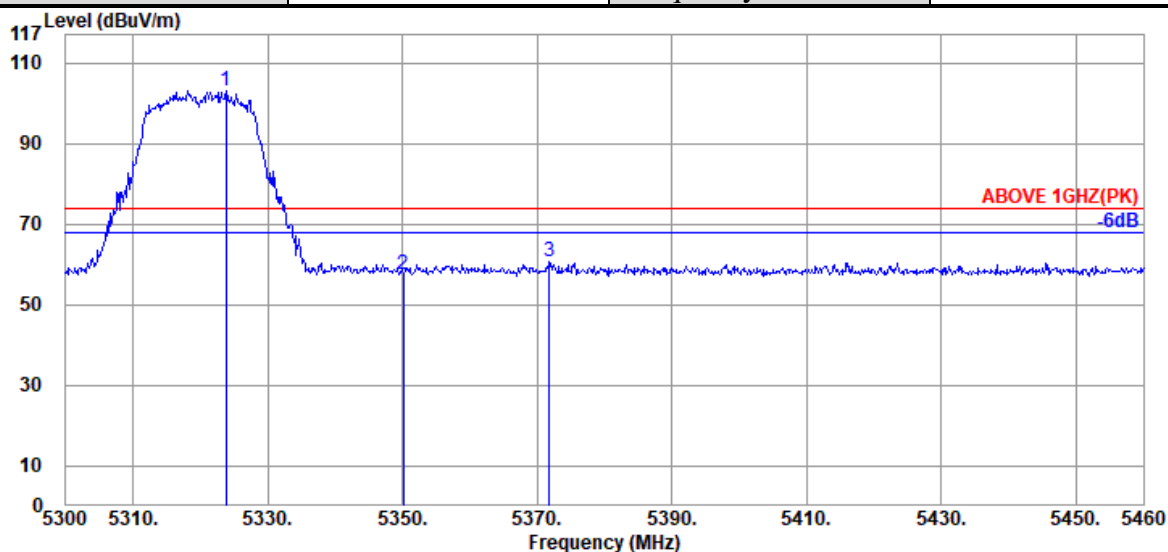

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.70	9.07	39.27	98.37	102.87	---	---	Peak
5350.080	34.80	9.10	39.27	52.97	57.60	74.00	16.40	Peak
5371.840	34.93	9.11	39.27	55.75	60.52	74.00	13.48	Peak

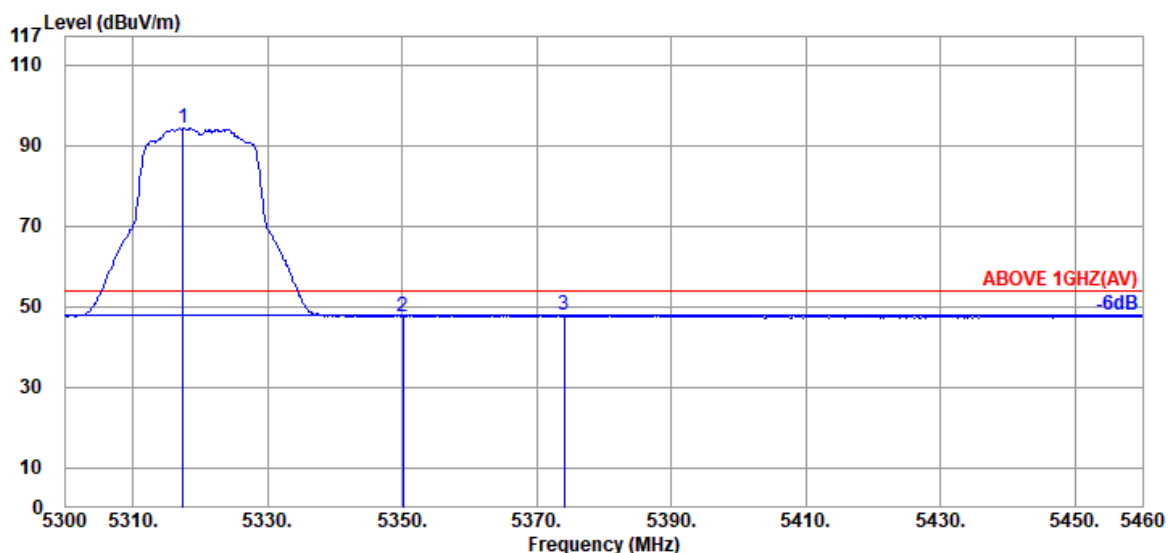

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.60	9.07	39.27	89.89	94.29	---	---	Average
5350.080	34.80	9.10	39.27	42.91	47.54	54.00	6.46	Average
5374.080	34.93	9.11	39.27	43.08	47.85	54.00	6.15	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

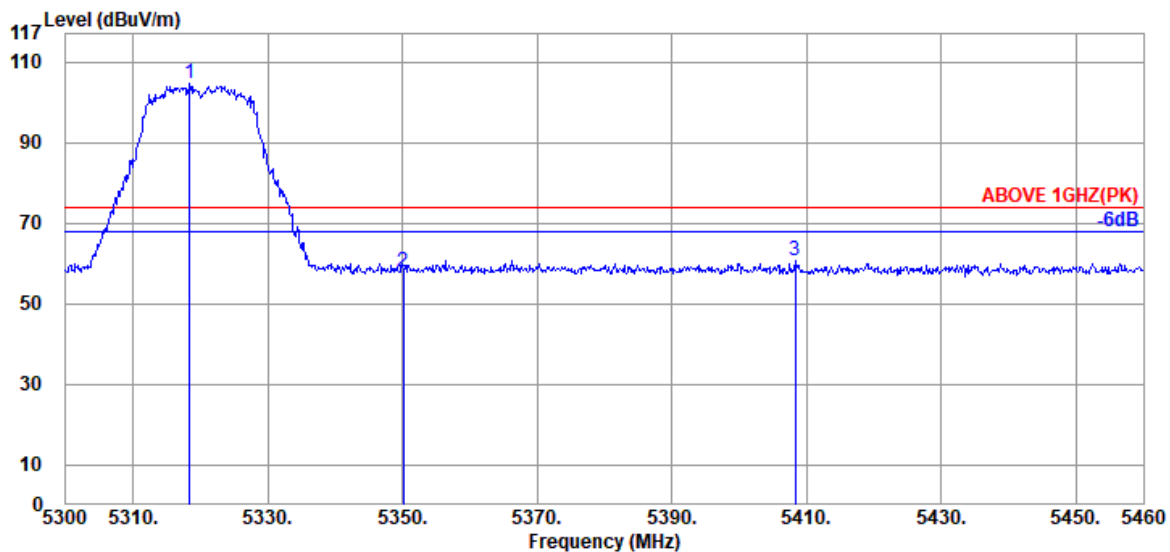

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.60	9.07	39.27	100.08	104.48	---	---	Peak
5350.080	34.80	9.10	39.27	53.39	58.02	74.00	15.98	Peak
5408.320	35.00	9.14	39.27	55.91	60.78	74.00	13.22	Peak

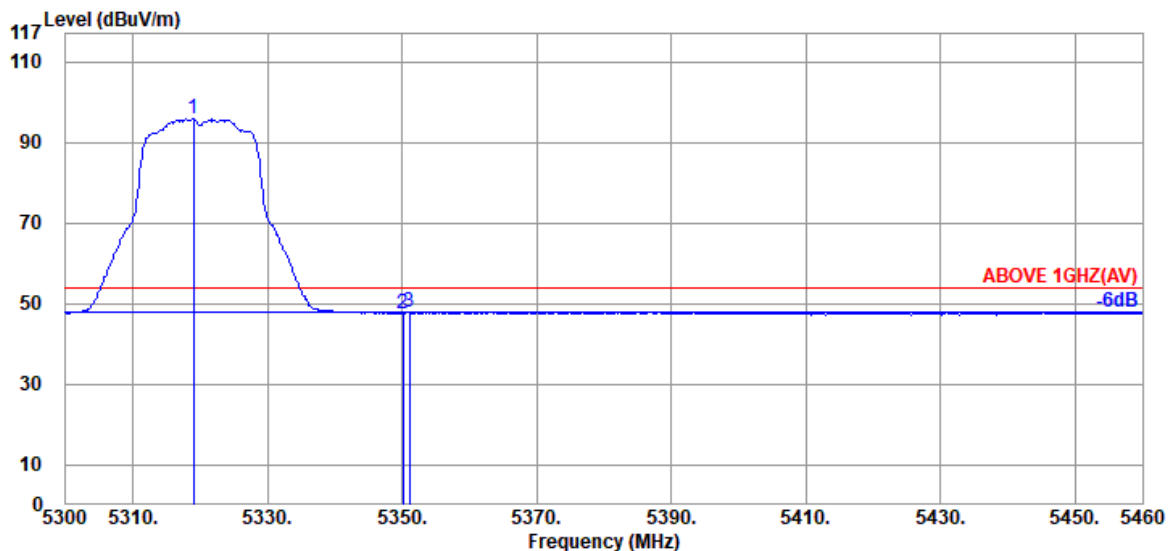

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.040	34.60	9.07	39.27	91.52	95.92	---	---	Average
5350.080	34.80	9.10	39.27	42.99	47.62	54.00	6.38	Average
5351.040	34.80	9.10	39.27	43.34	47.97	54.00	6.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

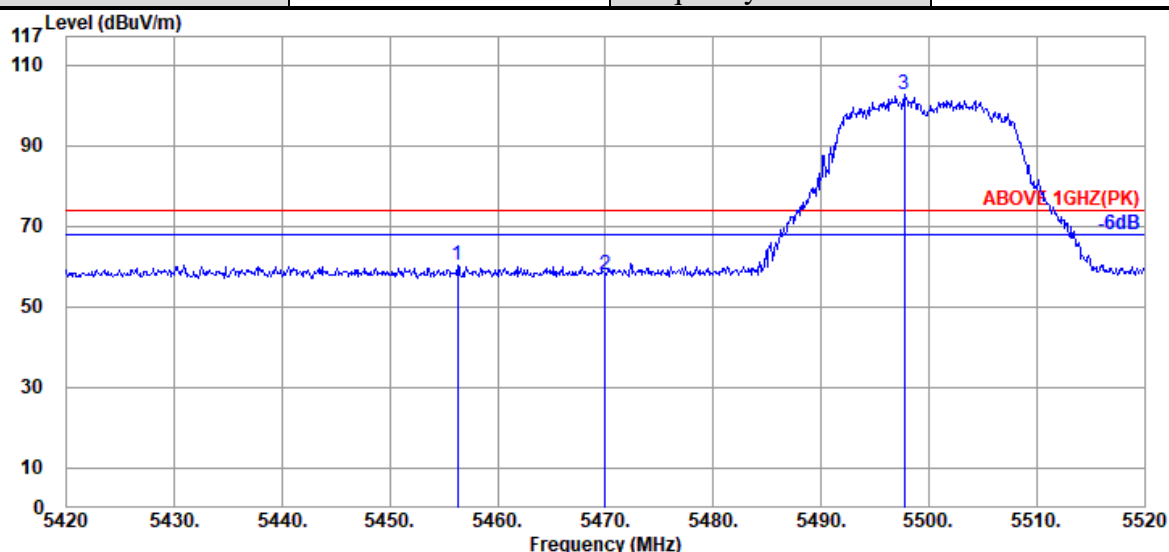

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.300	35.00	9.18	39.26	55.30	60.22	74.00	13.78	Peak
5470.000	34.97	9.20	39.26	52.81	57.72	74.00	16.28	Peak
@ 5497.700	34.90	9.23	39.26	97.62	102.49	---	---	Peak

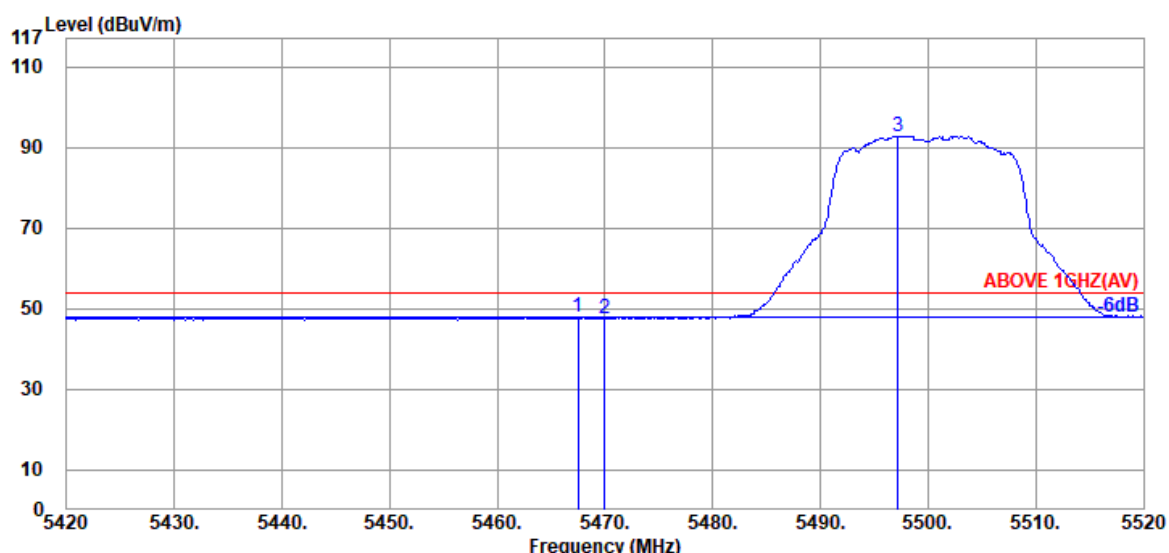


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.97	9.20	39.26	42.97	47.88	54.00	6.12	Average
5470.000	34.97	9.20	39.26	42.64	47.55	54.00	6.45	Average
@ 5497.200	34.90	9.23	39.26	87.95	92.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

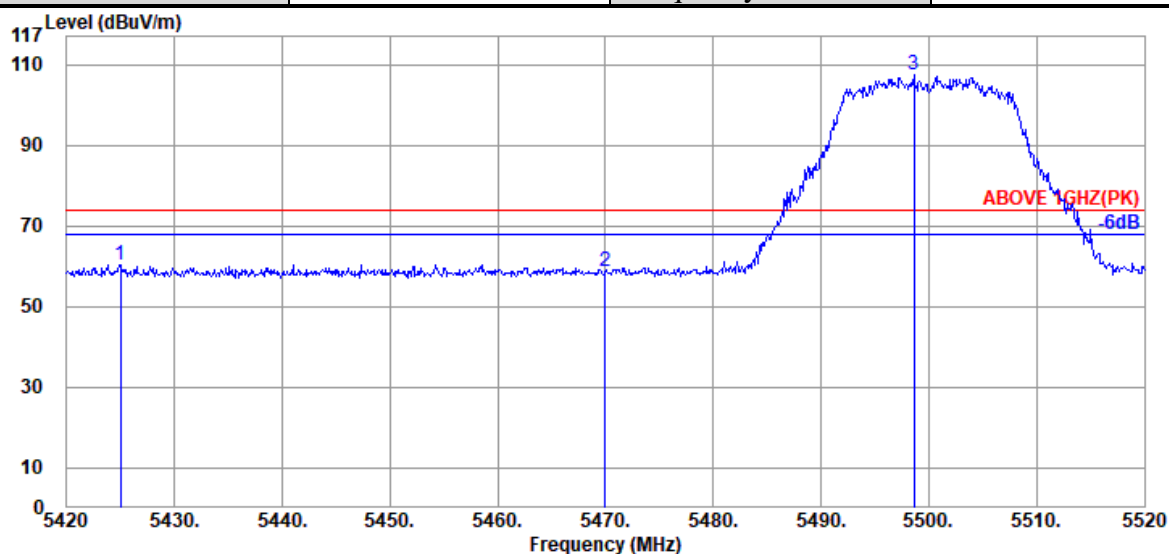

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5425.000	35.00	9.15	39.27	55.39	60.27	74.00	13.73	Peak
5470.000	34.97	9.20	39.26	53.62	58.53	74.00	15.47	Peak
@ 5498.600	34.90	9.23	39.26	102.53	107.40	---	---	Peak

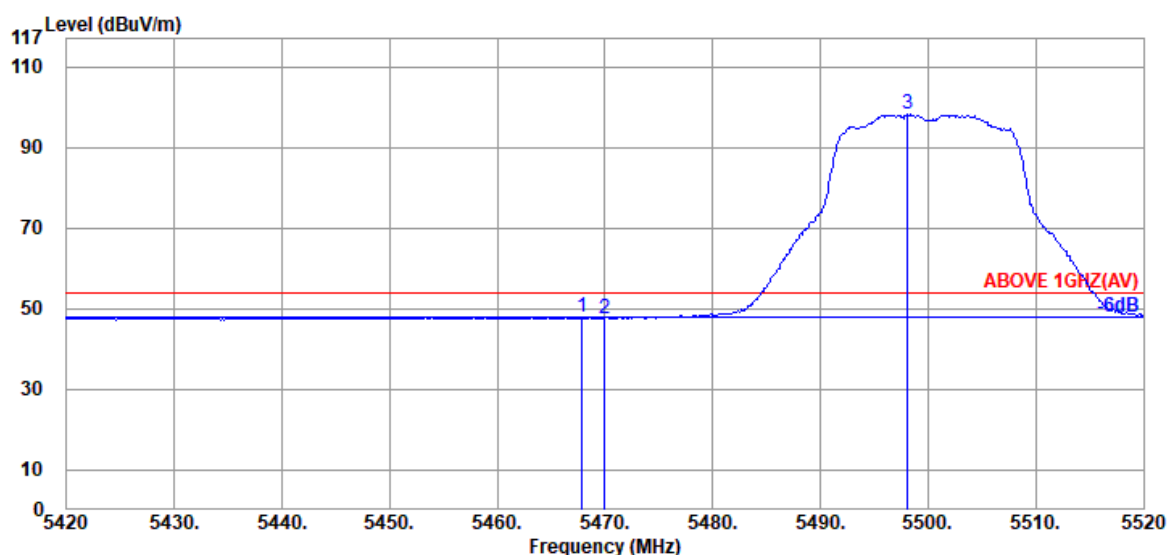


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.900	34.97	9.20	39.26	42.96	47.87	54.00	6.13	Average
5470.000	34.97	9.20	39.26	42.73	47.64	54.00	6.36	Average
@ 5498.100	34.90	9.23	39.26	93.18	98.05	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

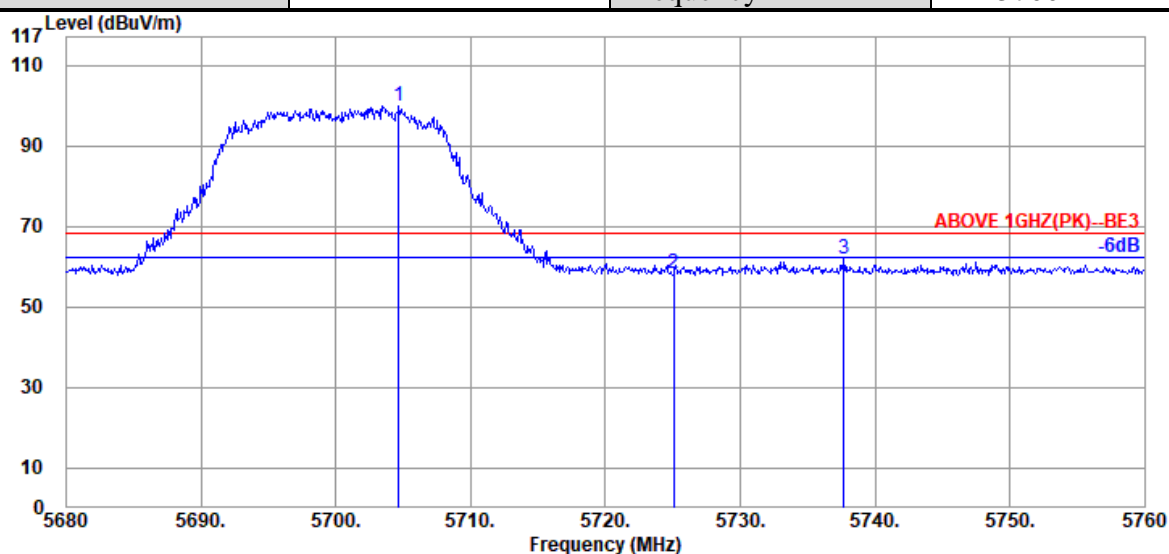

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5704.640	34.50	9.40	39.30	95.32	99.92	---	---	Peak
5725.040	34.57	9.42	39.30	53.77	58.46	68.20	9.74	Peak
5737.680	34.57	9.43	39.30	57.38	62.08	68.20	6.12	Peak

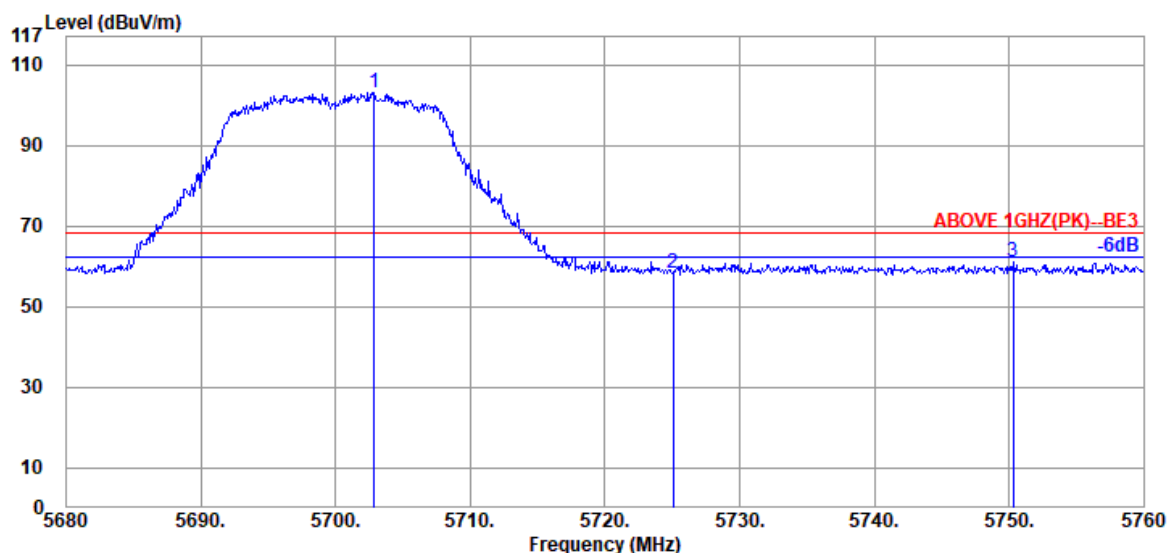

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5702.880	34.50	9.40	39.30	98.34	102.94	---	---	Peak
5725.040	34.57	9.42	39.30	53.46	58.15	68.20	10.05	Peak
5750.320	34.60	9.43	39.31	56.48	61.20	68.20	7.00	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

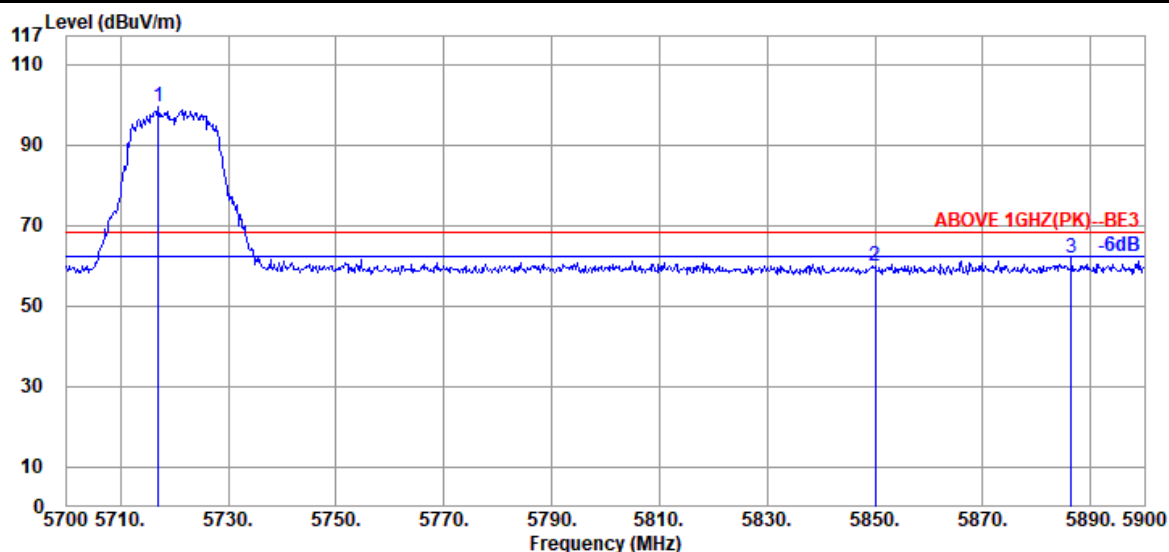

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.000	34.53	9.40	39.30	94.69	99.32	---	---	Peak
5850.000	34.60	9.52	39.32	54.95	59.75	68.20	8.45	Peak
5886.400	34.60	9.55	39.33	57.11	61.93	68.20	6.27	Peak

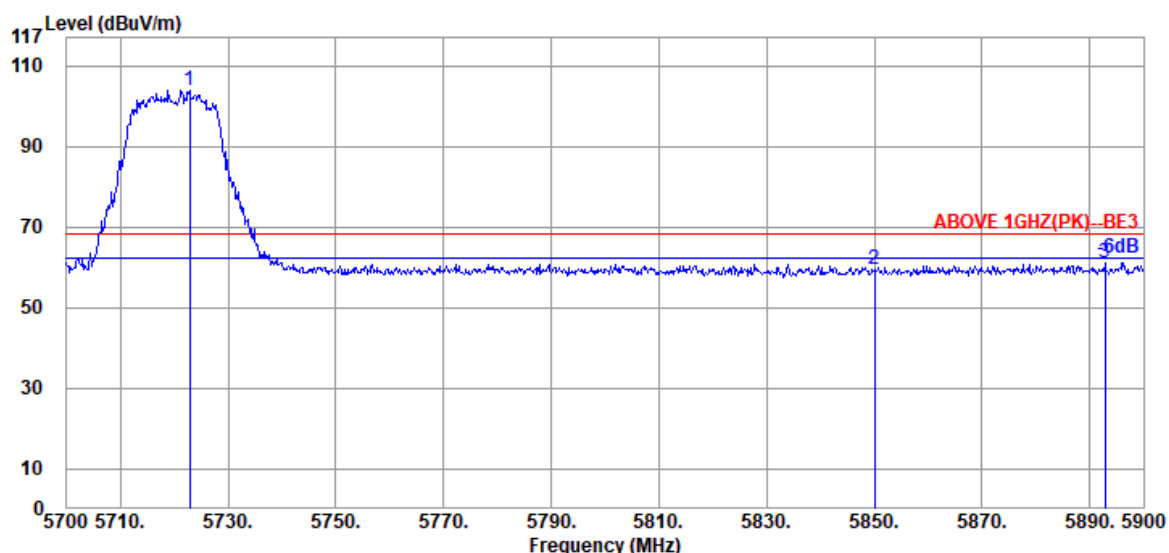

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	34.57	9.42	39.30	99.23	103.92	---	---	Peak
5850.000	34.60	9.52	39.32	54.54	59.34	68.20	8.86	Peak
5892.800	34.60	9.56	39.33	56.29	61.12	68.20	7.08	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

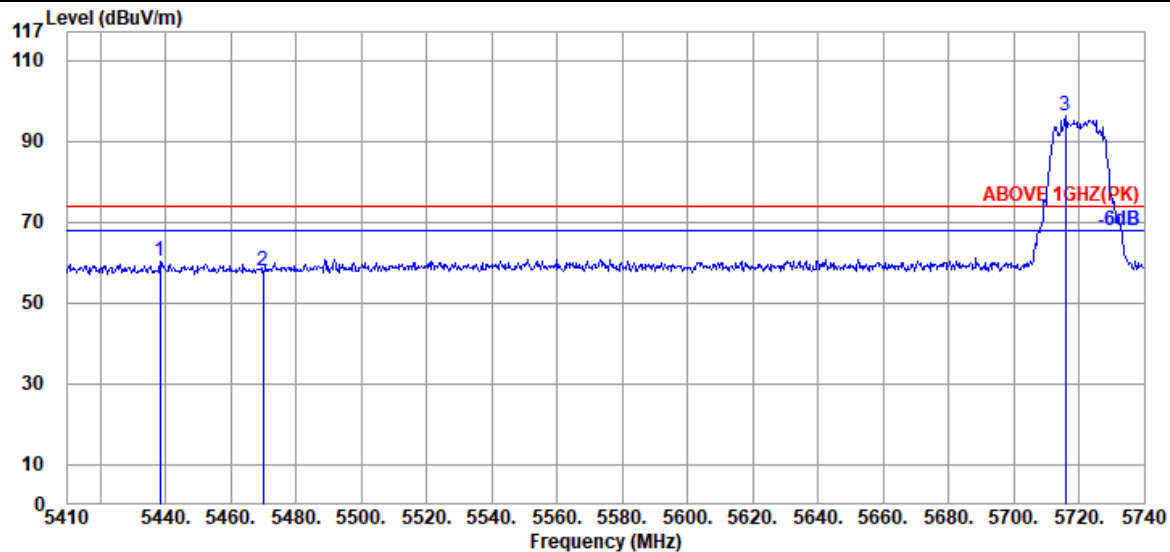

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.380	35.00	9.04	34.22	50.36	60.18	74.00	13.82	Peak
5470.060	34.97	9.06	34.21	48.15	57.97	74.00	16.03	Peak
@ 5715.910	34.53	9.19	34.30	86.91	96.33	---	---	Peak

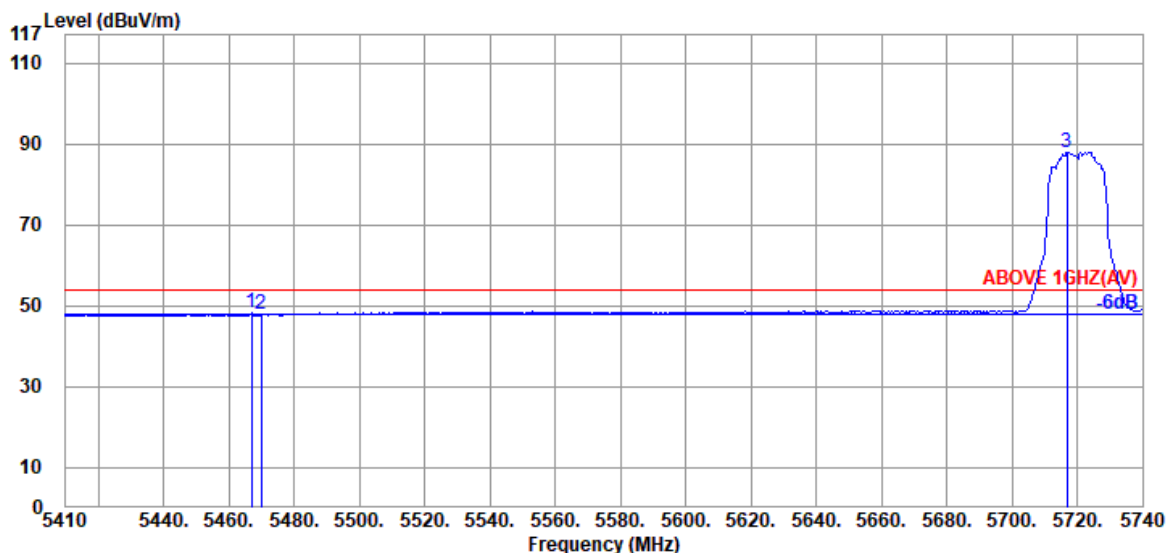


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.090	34.97	9.06	34.21	38.30	48.12	54.00	5.88	Average
5470.060	34.97	9.06	34.21	38.00	47.82	54.00	6.18	Average
@ 5716.900	34.53	9.19	34.30	78.52	87.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

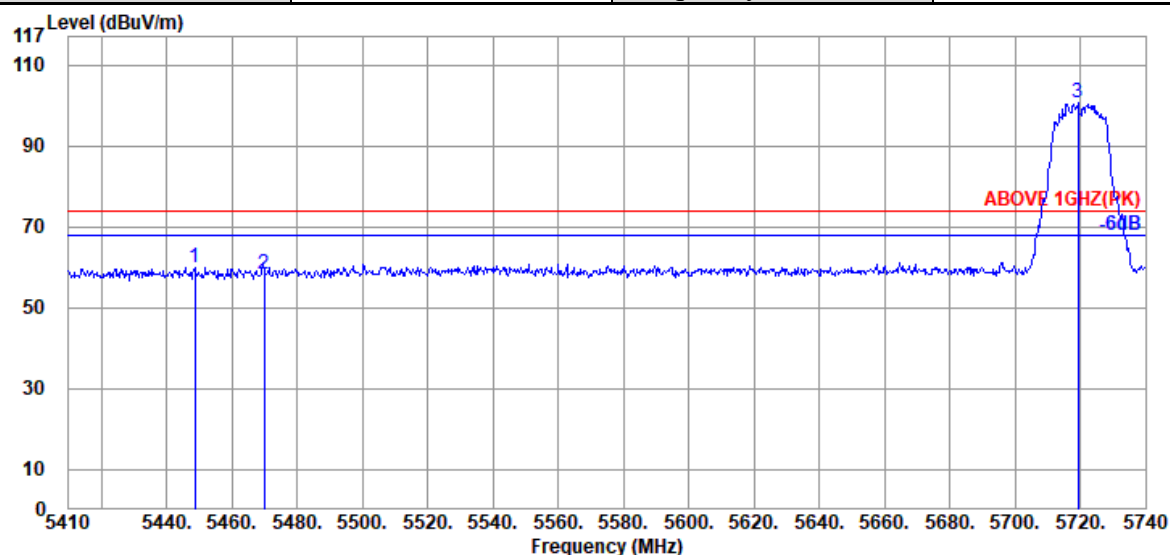

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.610	35.00	9.05	34.22	50.07	59.90	74.00	14.10	Peak
5470.060	34.97	9.06	34.21	48.29	58.11	74.00	15.89	Peak
@ 5719.210	34.53	9.19	34.30	91.19	100.61	---	---	Peak

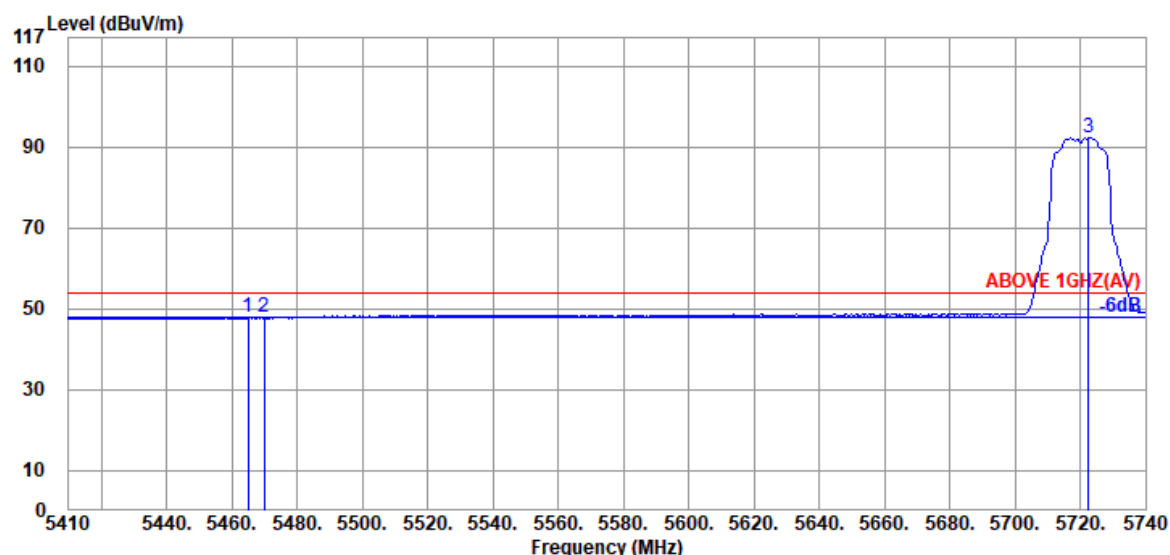

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.97	9.06	34.21	38.15	47.97	54.00	6.03	Average
5470.060	34.97	9.06	34.21	37.92	47.74	54.00	6.26	Average
@ 5722.510	34.57	9.20	34.30	82.79	92.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

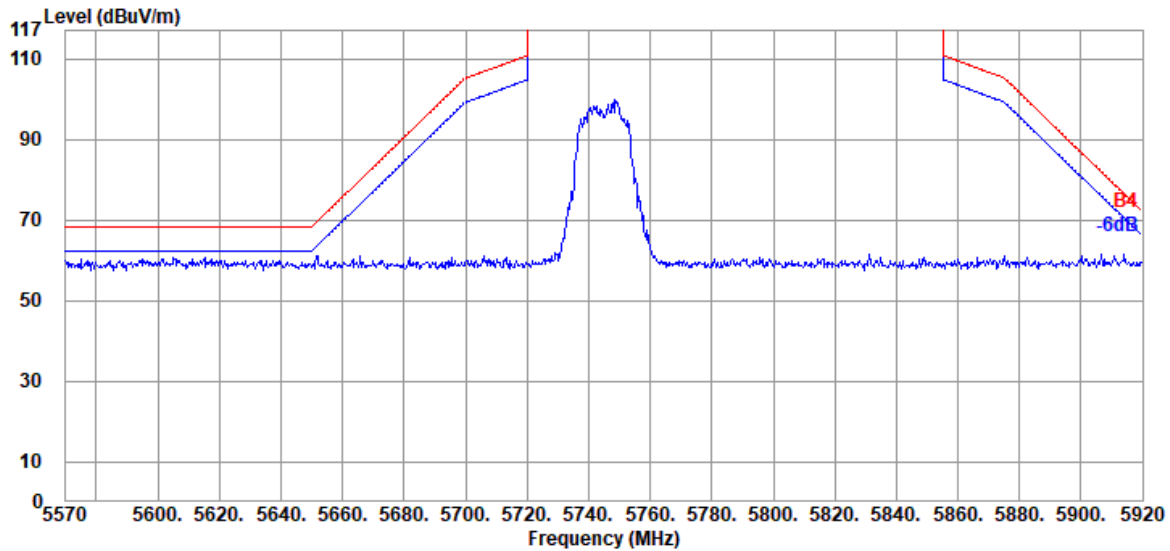

Antenna at Vertical Polarization

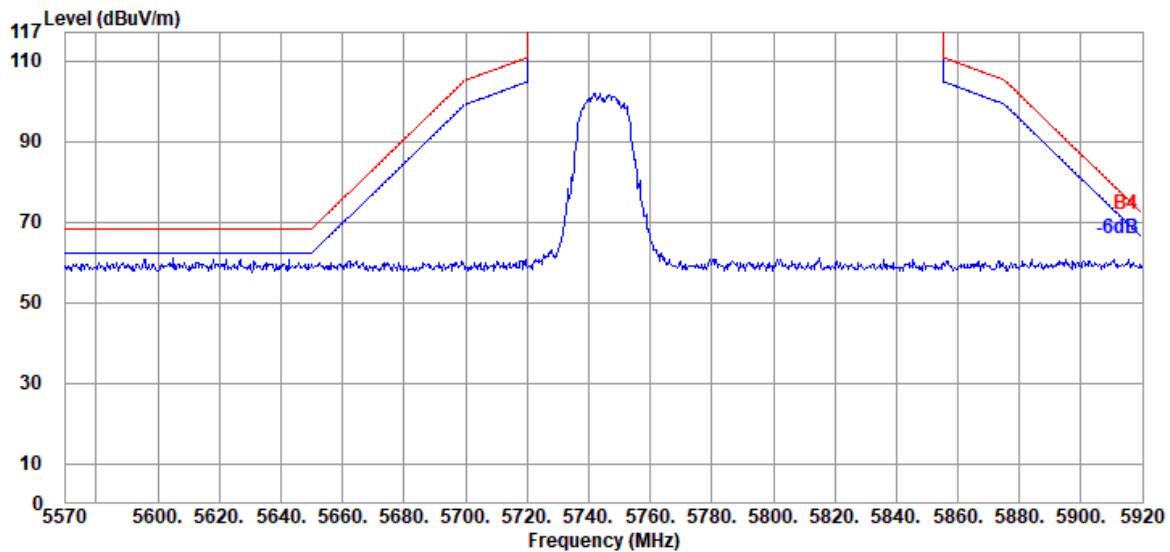


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

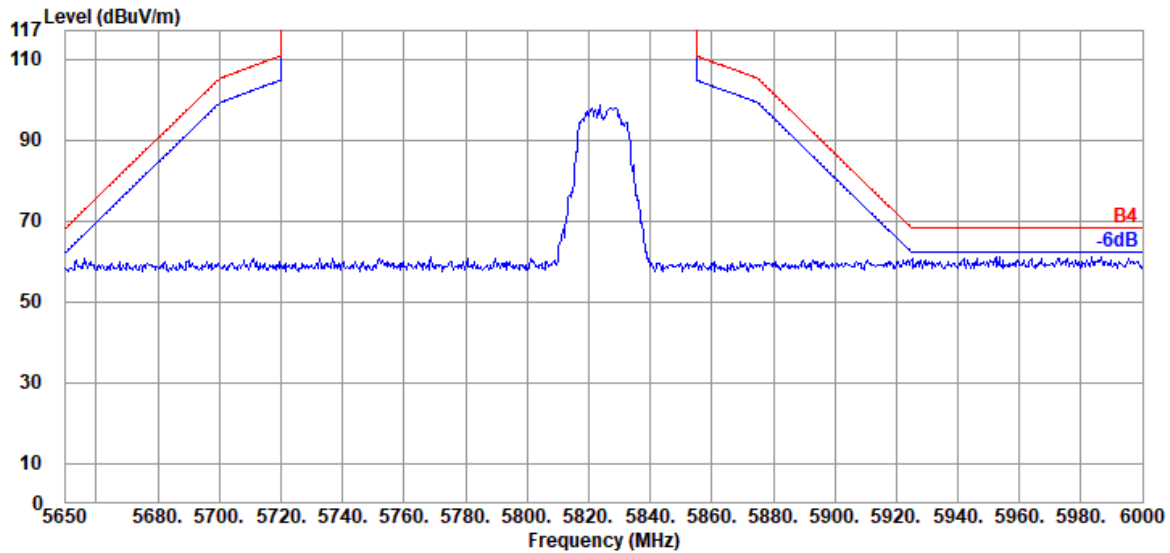

Antenna at Vertical Polarization

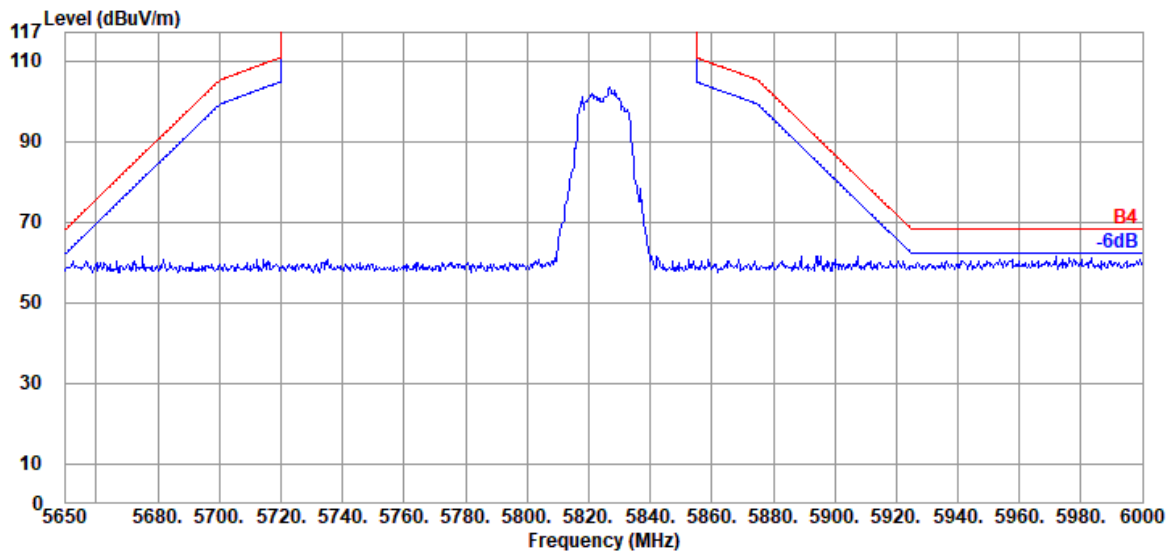


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

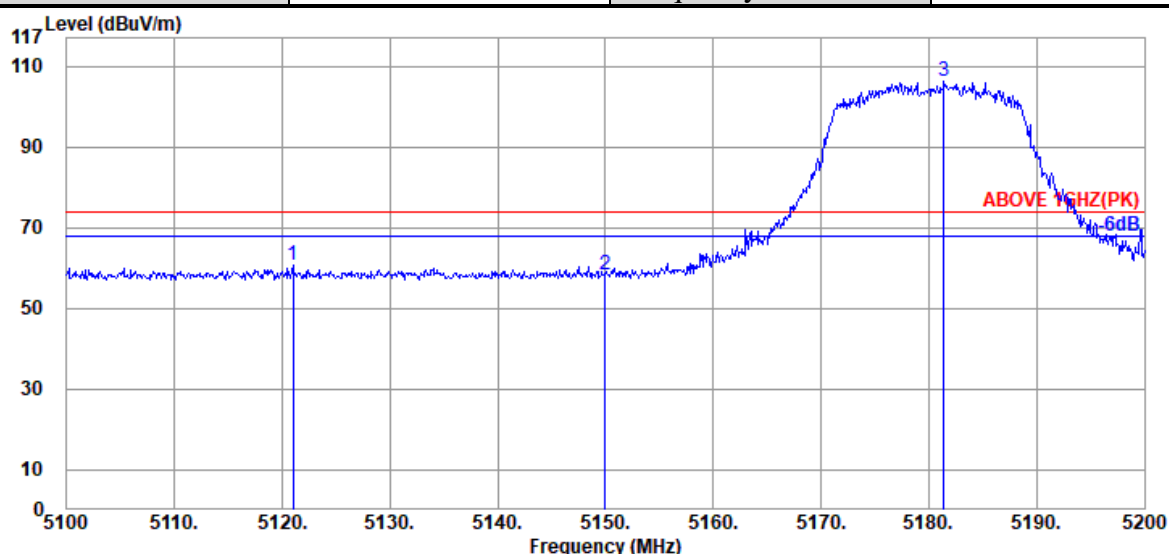

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5121.000	34.07	8.89	39.29	57.05	60.72	74.00	13.28	Peak
5150.000	34.20	8.92	39.29	54.56	58.39	74.00	15.61	Peak
@ 5181.400	34.33	8.95	39.28	102.07	106.07	---	---	Peak

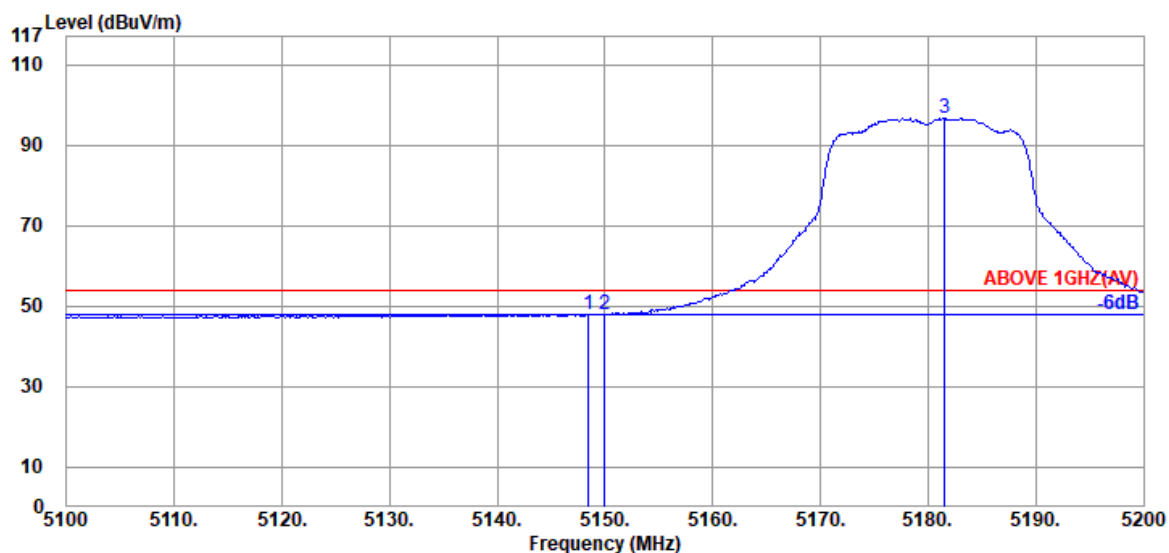

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.500	34.20	8.92	39.29	44.27	48.10	54.00	5.90	Average
5150.000	34.20	8.92	39.29	44.15	47.98	54.00	6.02	Average
@ 5181.500	34.33	8.95	39.28	92.58	96.58	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

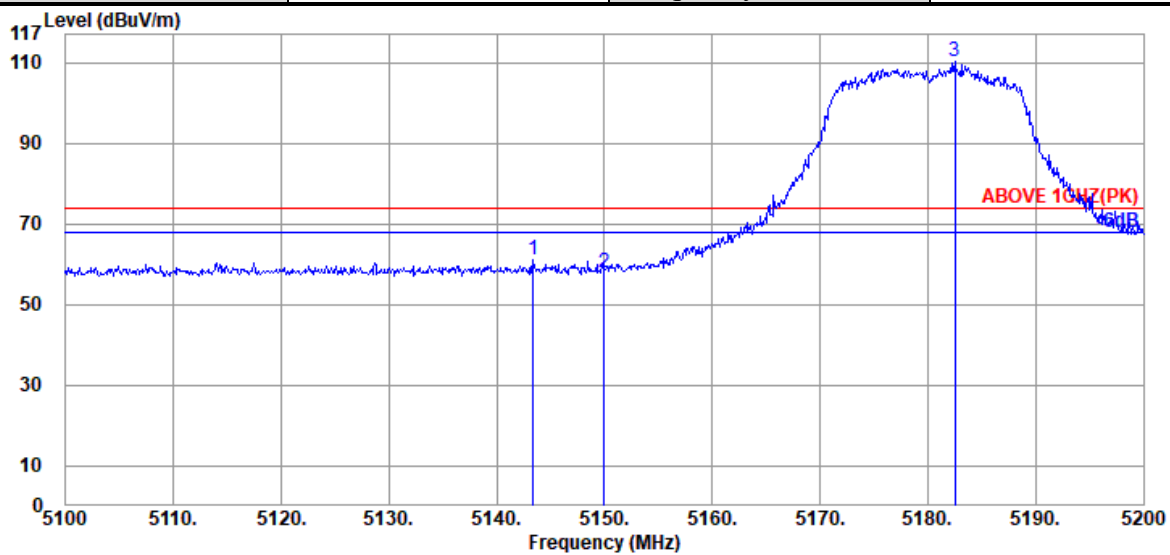

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5143.400	34.20	8.92	39.29	57.41	61.24	74.00	12.76	Peak
5150.000	34.20	8.92	39.29	53.96	57.79	74.00	16.21	Peak
@ 5182.500	34.33	8.95	39.28	106.09	110.09	---	---	Peak

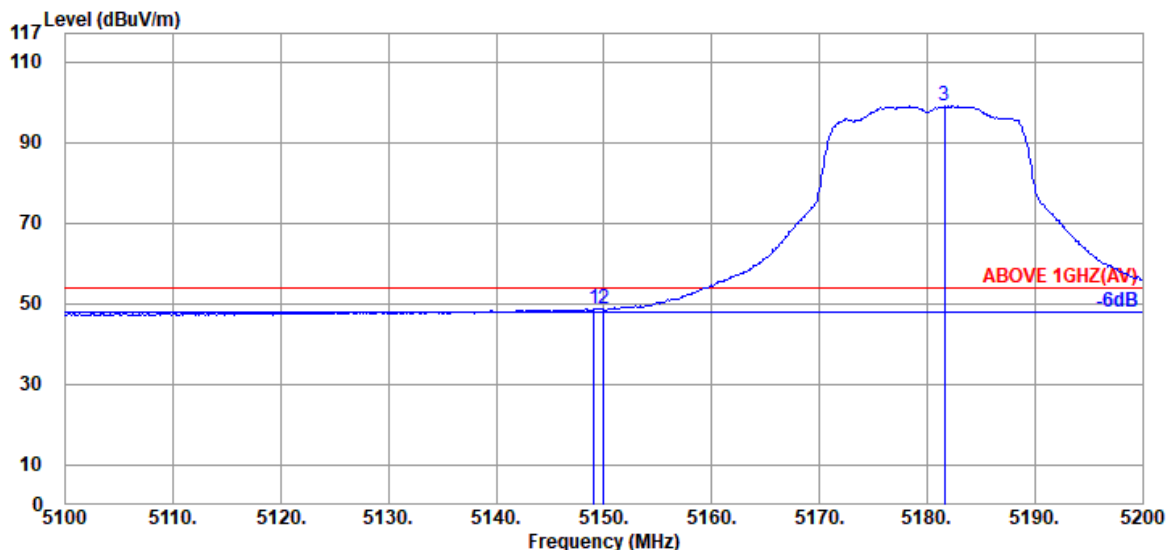


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.100	34.20	8.92	39.29	44.96	48.79	54.00	5.21	Average
5150.000	34.20	8.92	39.29	44.75	48.58	54.00	5.42	Average
@ 5181.600	34.33	8.95	39.28	94.98	98.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

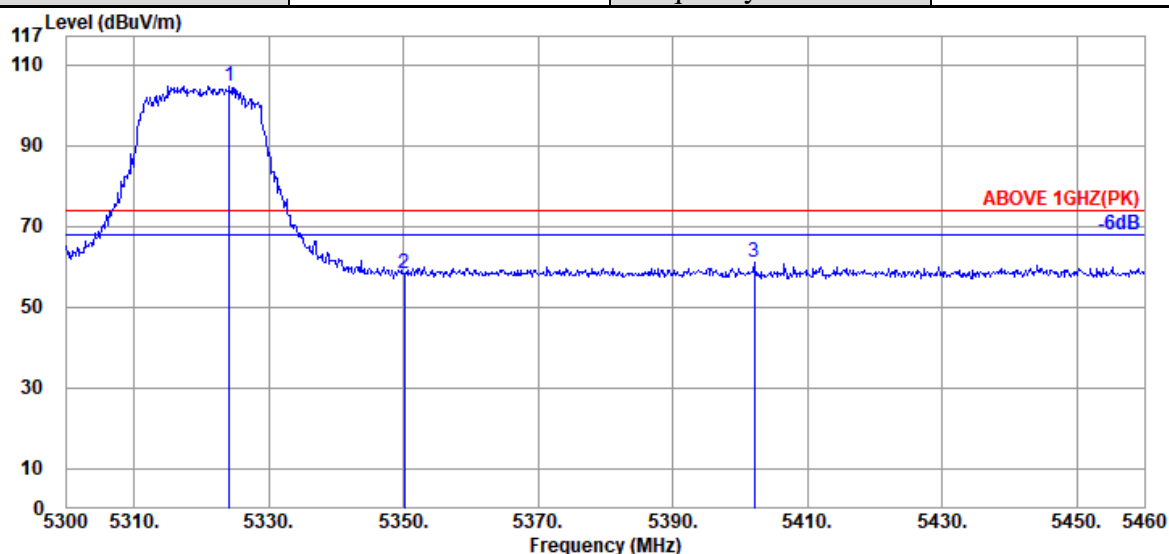

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.160	34.70	9.07	39.27	100.32	104.82	---	---	Peak
5350.080	34.80	9.10	39.27	53.59	58.22	74.00	15.78	Peak
5402.080	35.00	9.14	39.27	56.09	60.96	74.00	13.04	Peak

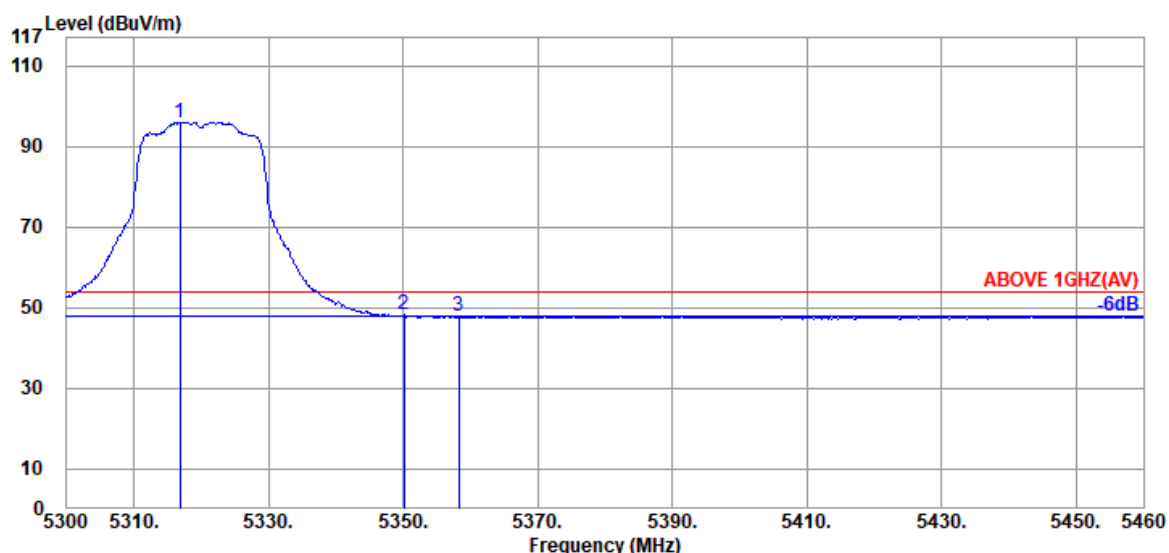

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.60	9.07	39.27	91.62	96.02	---	---	Average
5350.080	34.80	9.10	39.27	43.49	48.12	54.00	5.88	Average
5358.240	34.87	9.10	39.27	43.29	47.99	54.00	6.01	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

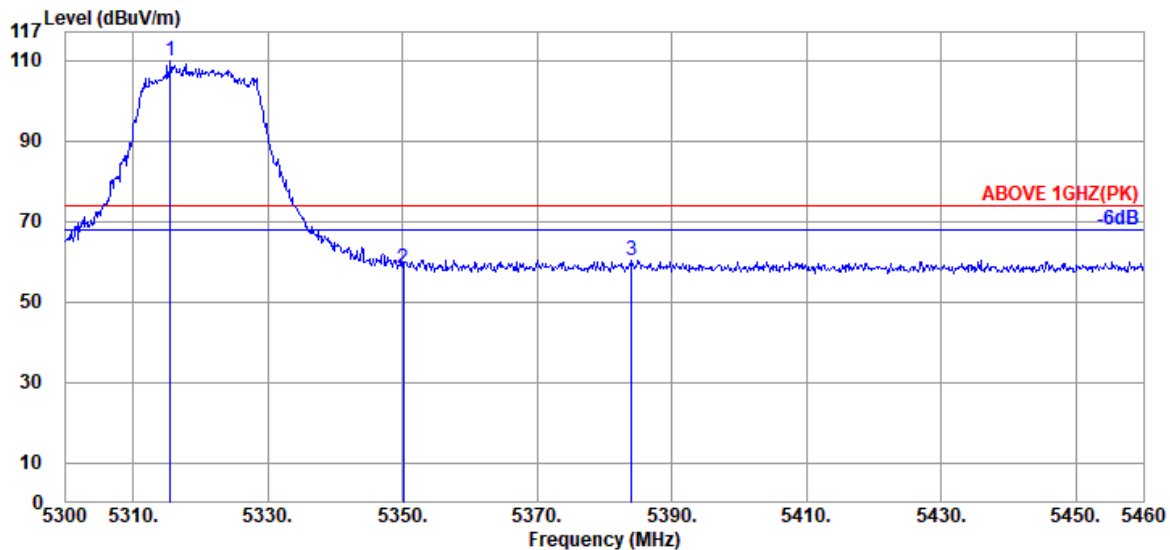

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.520	34.60	9.07	39.27	105.46	109.86	---	---	Peak
5350.080	34.80	9.10	39.27	53.82	58.45	74.00	15.55	Peak
5384.000	34.93	9.13	39.27	55.52	60.31	74.00	13.69	Peak

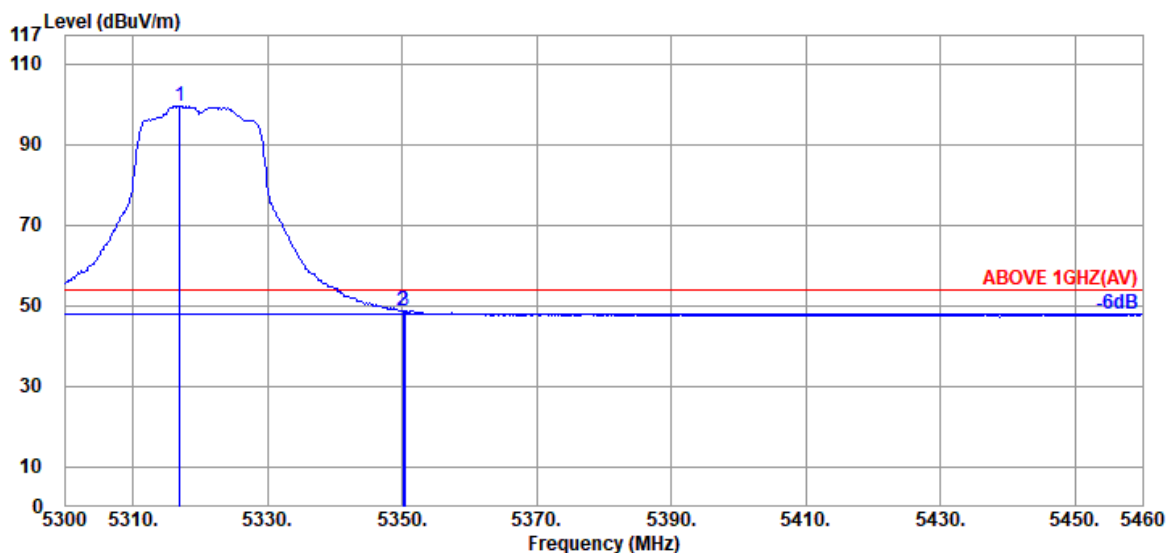

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.60	9.07	39.27	95.11	99.51	---	---	Average
5350.080	34.80	9.10	39.27	44.22	48.85	54.00	5.15	Average
5350.400	34.80	9.10	39.27	44.23	48.86	54.00	5.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

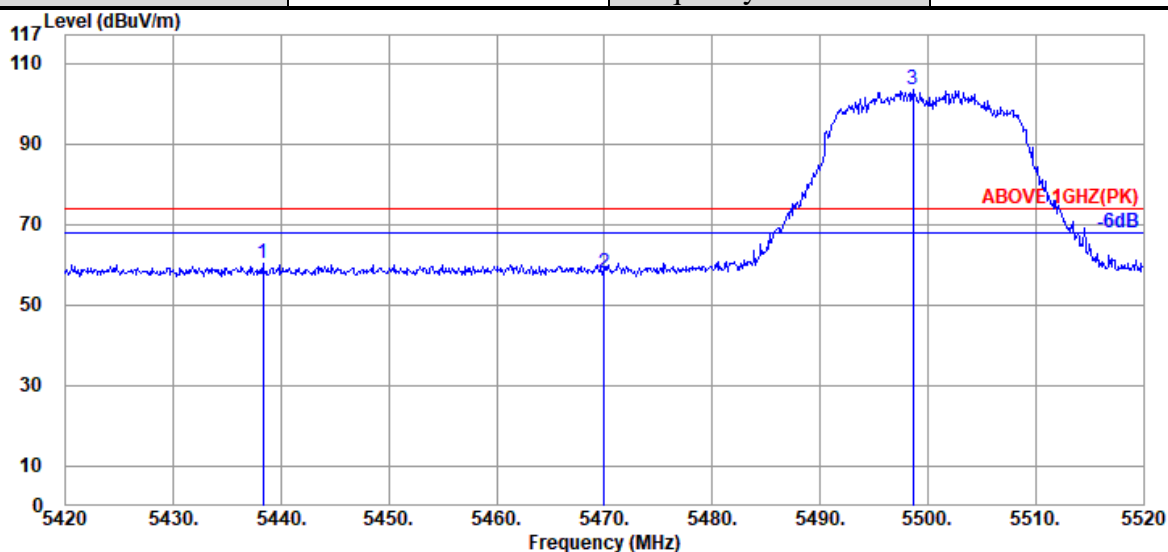

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5438.300	35.00	9.17	39.26	55.41	60.32	74.00	13.68	Peak
5470.000	34.97	9.20	39.26	53.18	58.09	74.00	15.91	Peak
@ 5498.600	34.90	9.23	39.26	98.64	103.51	---	---	Peak

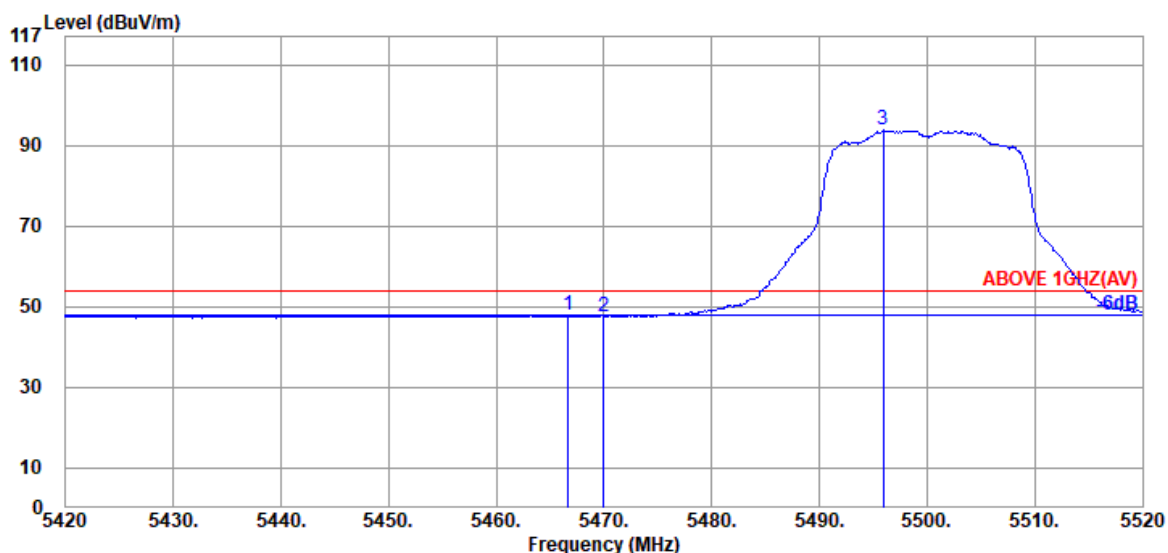

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.700	34.97	9.20	39.26	42.89	47.80	54.00	6.20	Average
5470.000	34.97	9.20	39.26	42.78	47.69	54.00	6.31	Average
@ 5495.900	34.90	9.21	39.26	88.91	93.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

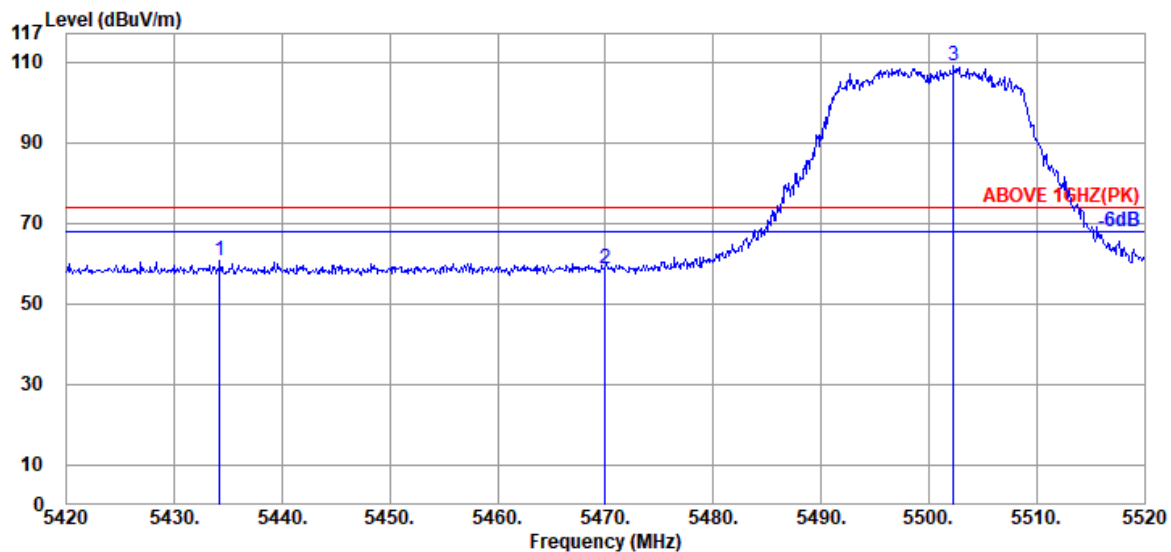

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.200	35.00	9.17	39.26	55.74	60.65	74.00	13.35	Peak
5470.000	34.97	9.20	39.26	53.61	58.52	74.00	15.48	Peak
@ 5502.300	34.90	9.23	39.26	104.08	108.95	---	---	Peak

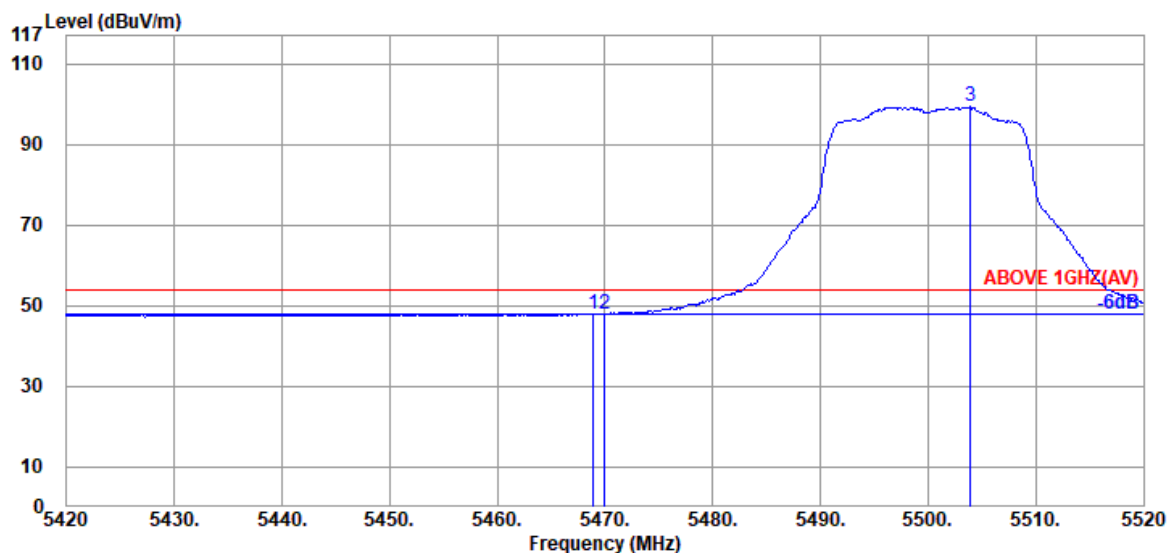


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	43.12	48.03	54.00	5.97	Average
5470.000	34.97	9.20	39.26	42.86	47.77	54.00	6.23	Average
@ 5503.900	34.90	9.23	39.26	94.42	99.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

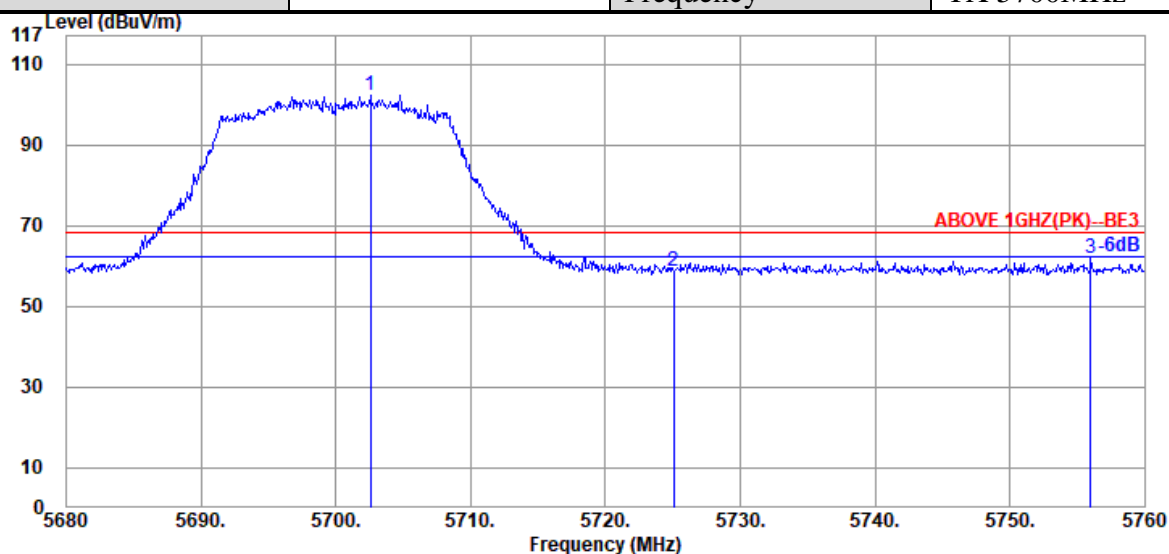

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.560	34.50	9.40	39.30	97.64	102.24	---	---	Peak
	5725.040	34.57	9.42	39.30	54.03	58.72	68.20	9.48	Peak
	5756.000	34.60	9.45	39.31	57.24	61.98	68.20	6.22	Peak

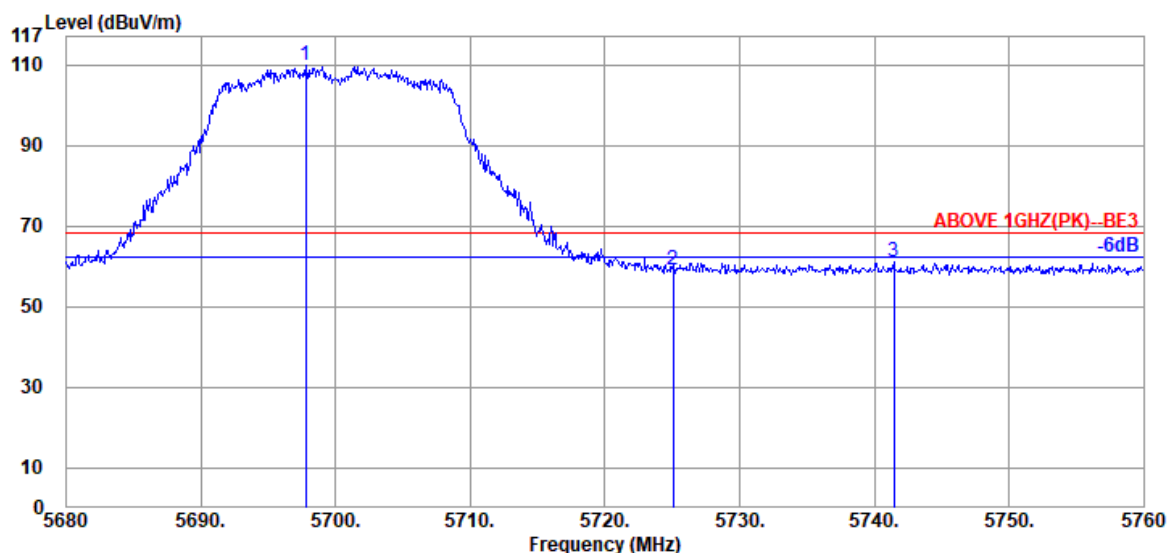

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.760	34.50	9.39	39.30	105.19	109.78	---	---	Peak
	5725.040	34.57	9.42	39.30	54.27	58.96	68.20	9.24	Peak
	5741.440	34.60	9.43	39.30	56.36	61.09	68.20	7.11	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

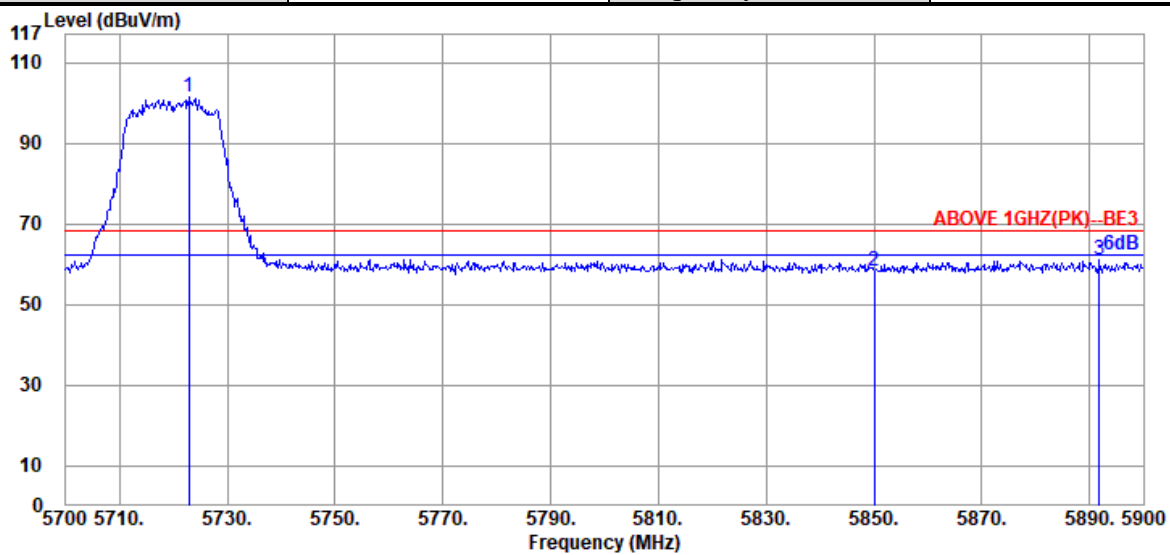

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	34.57	9.42	39.30	96.84	101.53	---	---	Peak
5850.000	34.60	9.52	39.32	53.51	58.31	68.20	9.89	Peak
5891.800	34.60	9.56	39.33	56.11	60.94	68.20	7.26	Peak

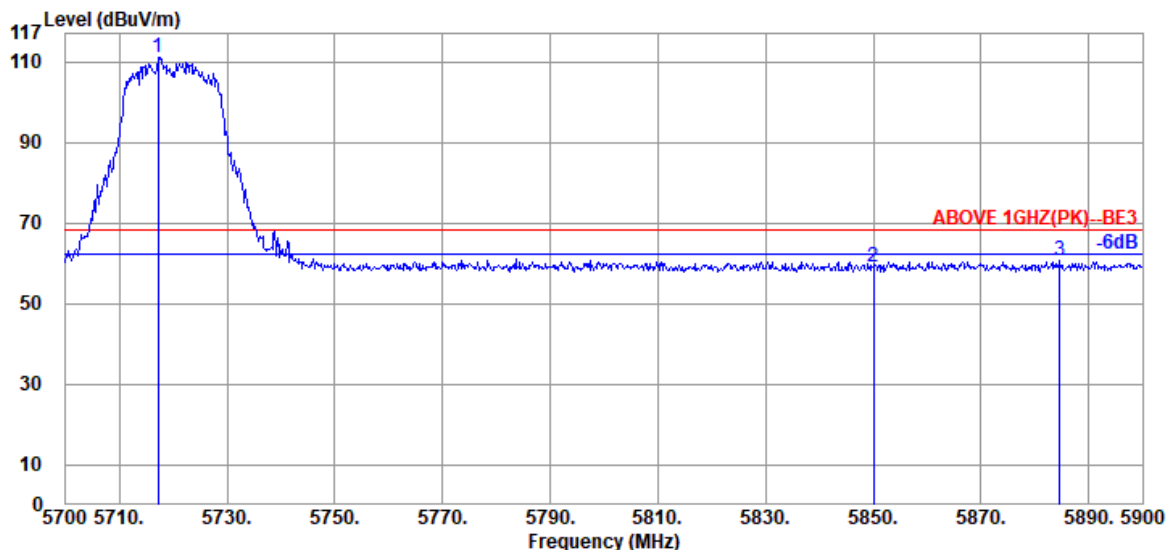

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.200	34.53	9.40	39.30	106.36	110.99	---	---	Peak
5850.000	34.60	9.52	39.32	54.19	58.99	68.20	9.21	Peak
5884.600	34.60	9.55	39.33	55.93	60.75	68.20	7.45	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

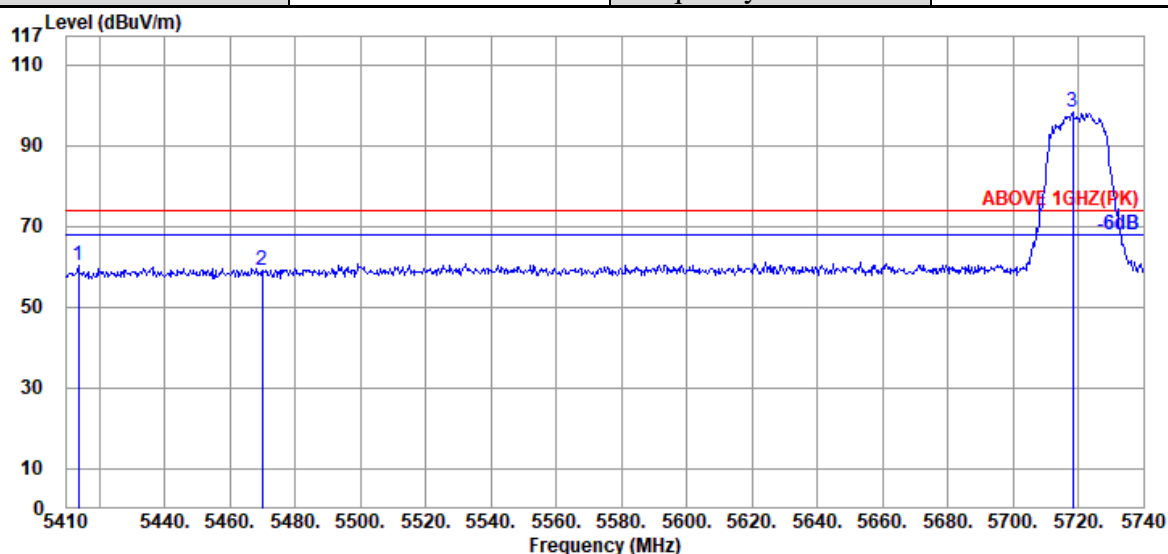

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.630	35.00	9.03	34.23	50.37	60.17	74.00	13.83	Peak
5470.060	34.97	9.06	34.21	49.13	58.95	74.00	15.05	Peak
@ 5718.220	34.53	9.19	34.30	88.94	98.36	---	---	Peak

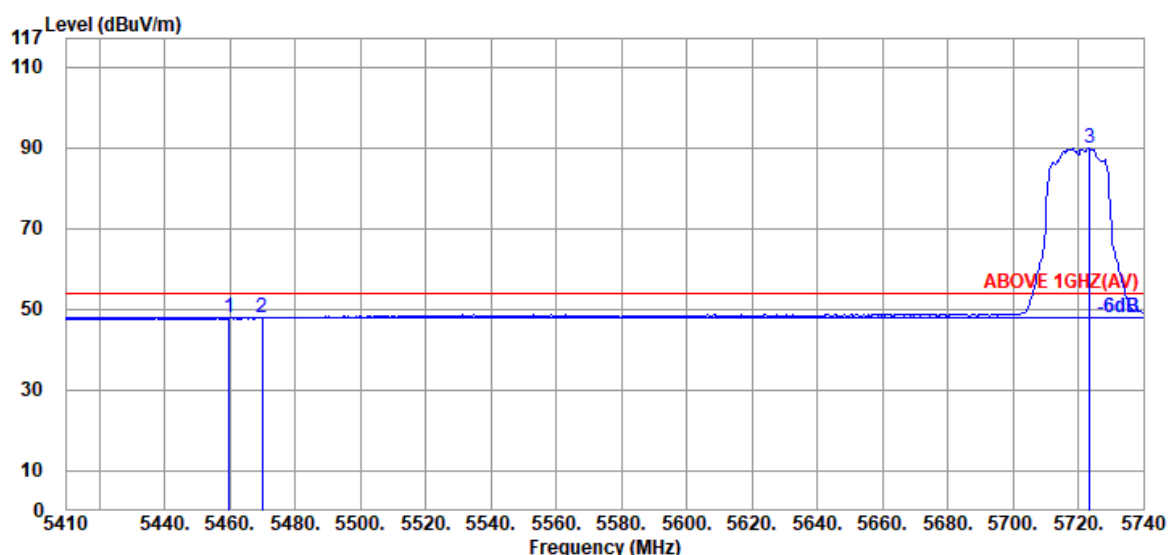

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.830	35.00	9.05	34.21	38.04	47.88	54.00	6.12	Average
5470.060	34.97	9.06	34.21	37.96	47.78	54.00	6.22	Average
@ 5723.500	34.57	9.20	34.30	80.35	89.82	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

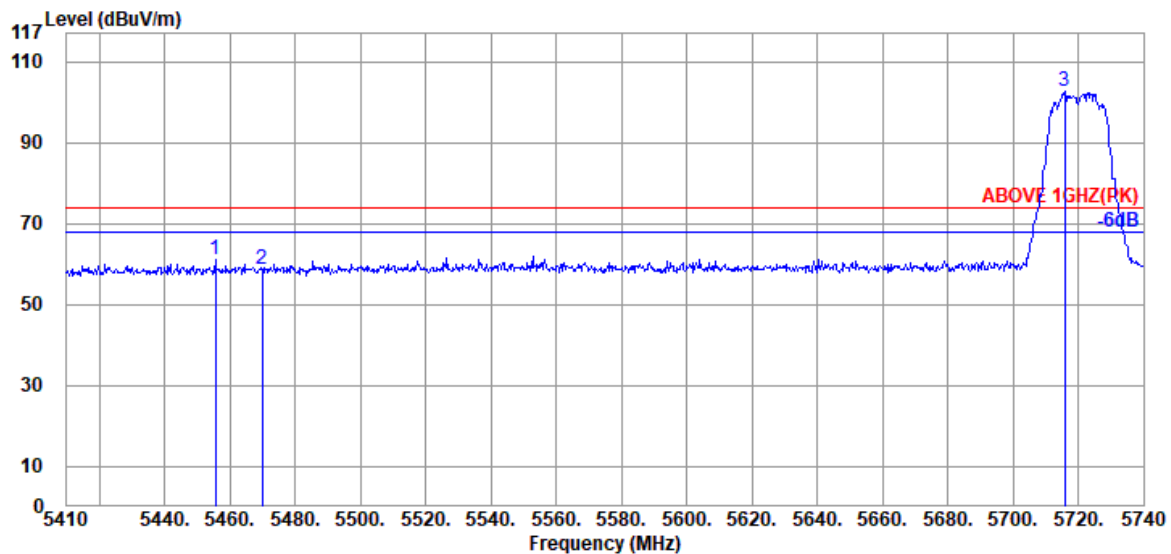

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.540	35.00	9.05	34.21	51.08	60.92	74.00	13.08	Peak
5470.060	34.97	9.06	34.21	48.88	58.70	74.00	15.30	Peak
@ 5715.910	34.53	9.19	34.30	93.18	102.60	---	---	Peak

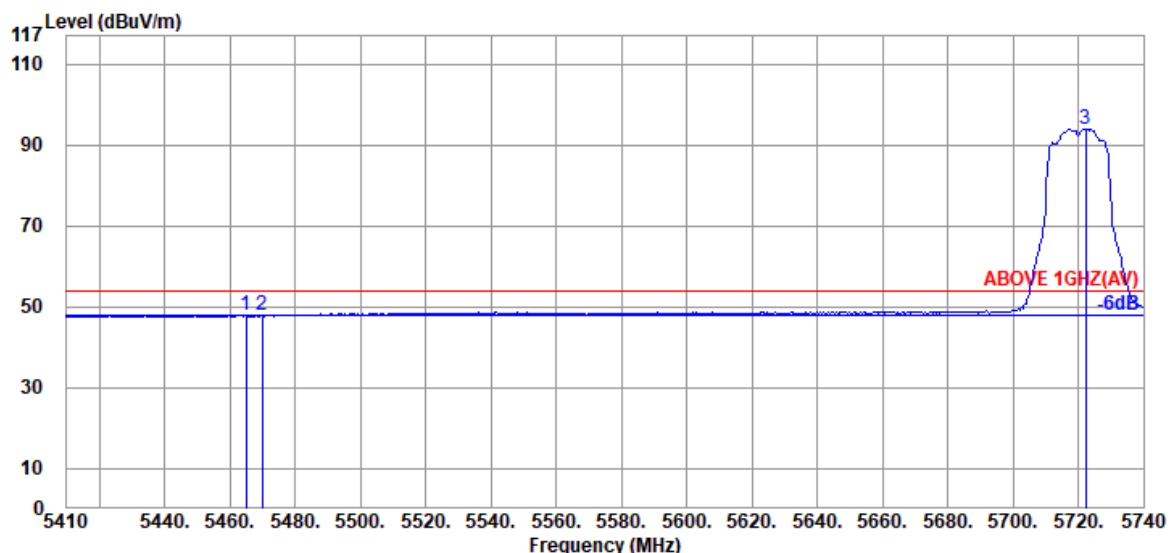

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.97	9.06	34.21	38.10	47.92	54.00	6.08	Average
5470.060	34.97	9.06	34.21	38.09	47.91	54.00	6.09	Average
@ 5722.180	34.57	9.20	34.30	84.50	93.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

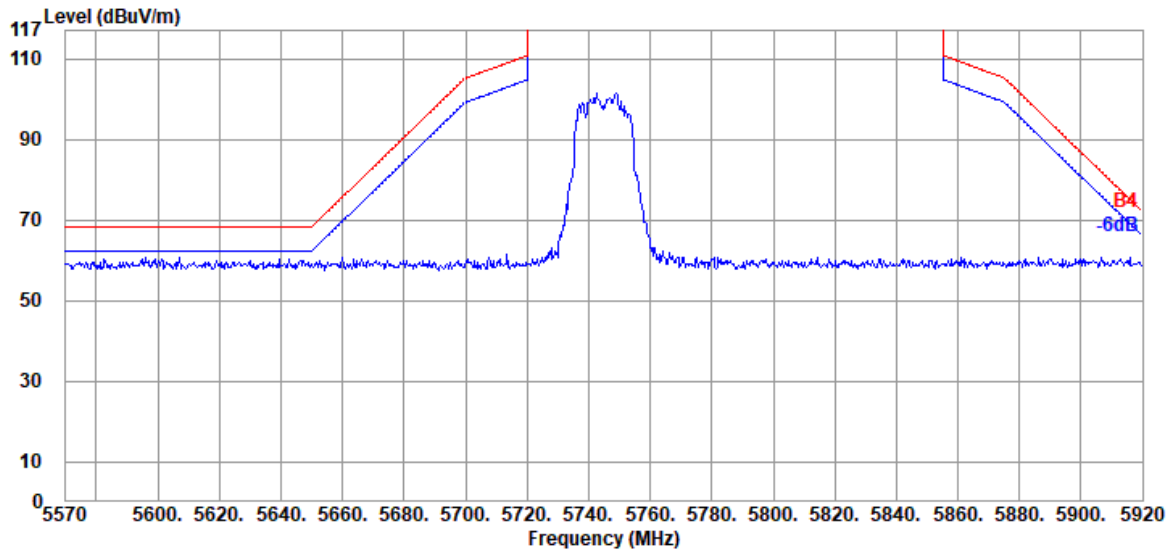

Antenna at Vertical Polarization

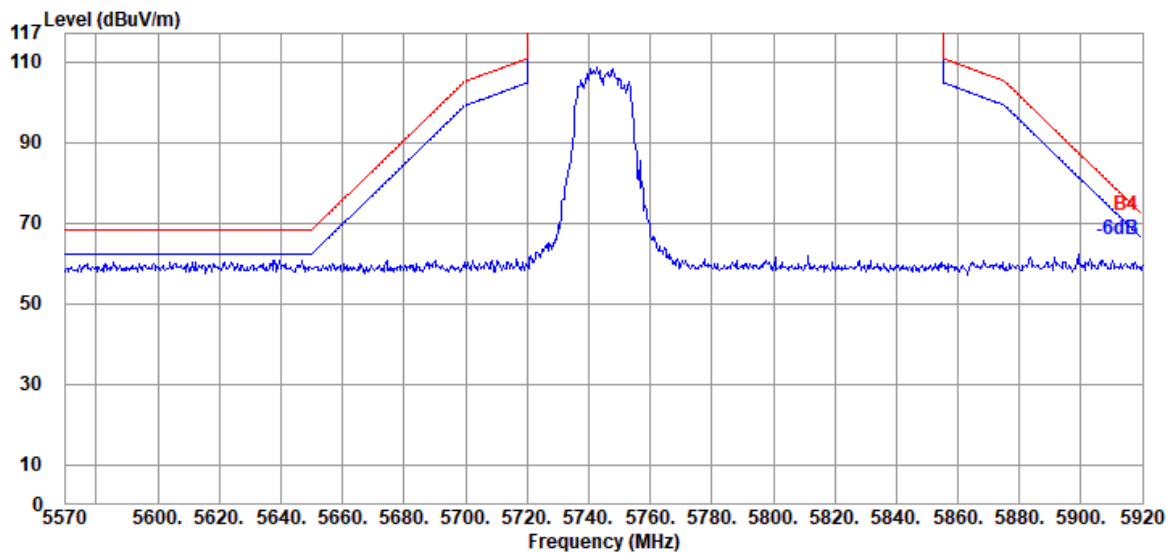


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

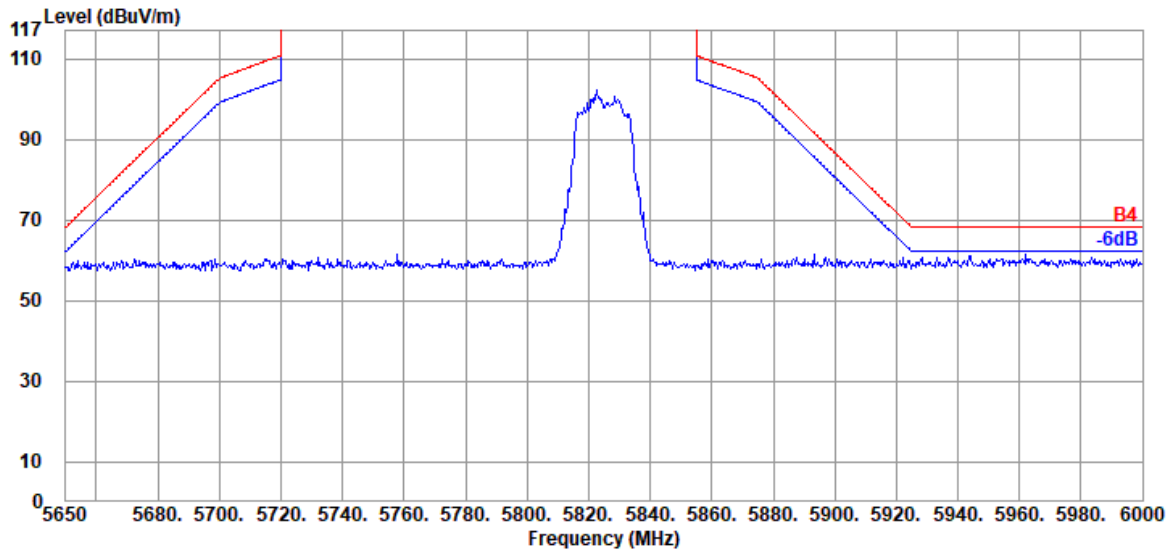

Antenna at Vertical Polarization

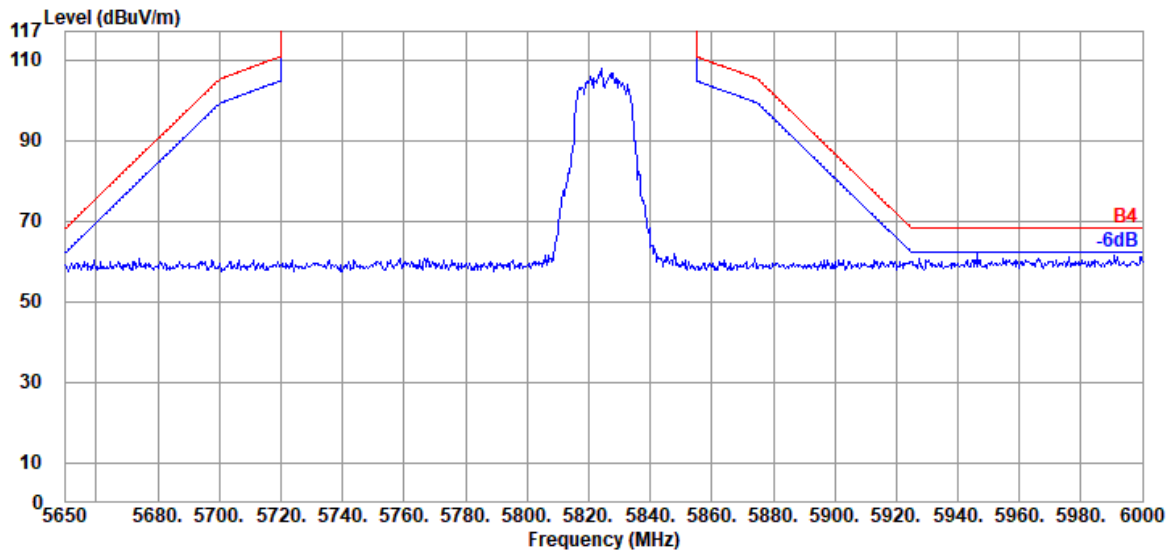


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

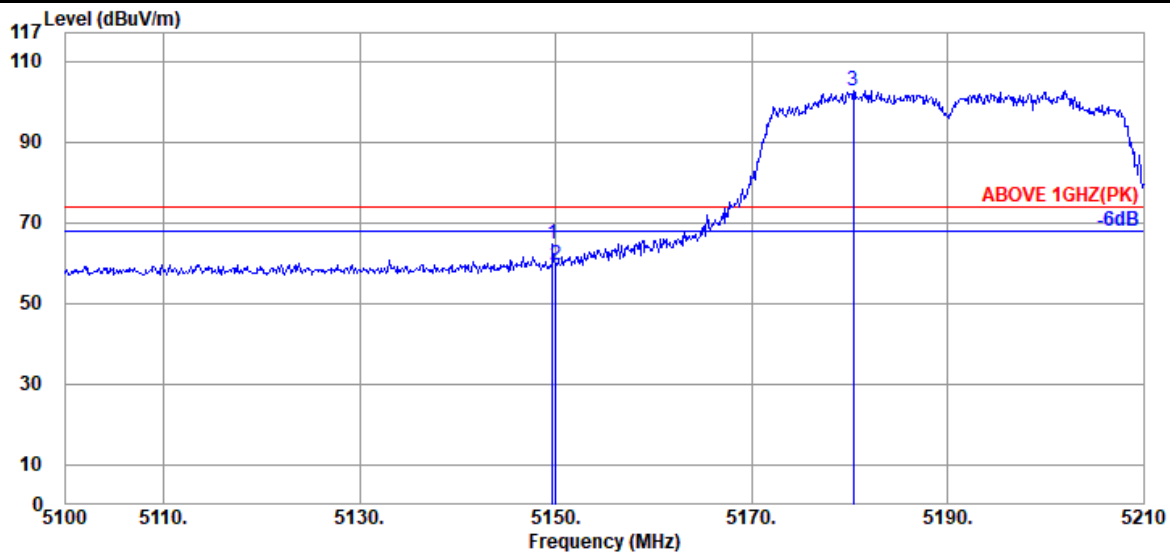

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.720	34.20	8.92	39.29	61.00	64.83	74.00	9.17	Peak
5150.050	34.20	8.92	39.29	55.49	59.32	74.00	14.68	Peak
@ 5180.410	34.33	8.95	39.28	98.67	102.67	---	---	Peak

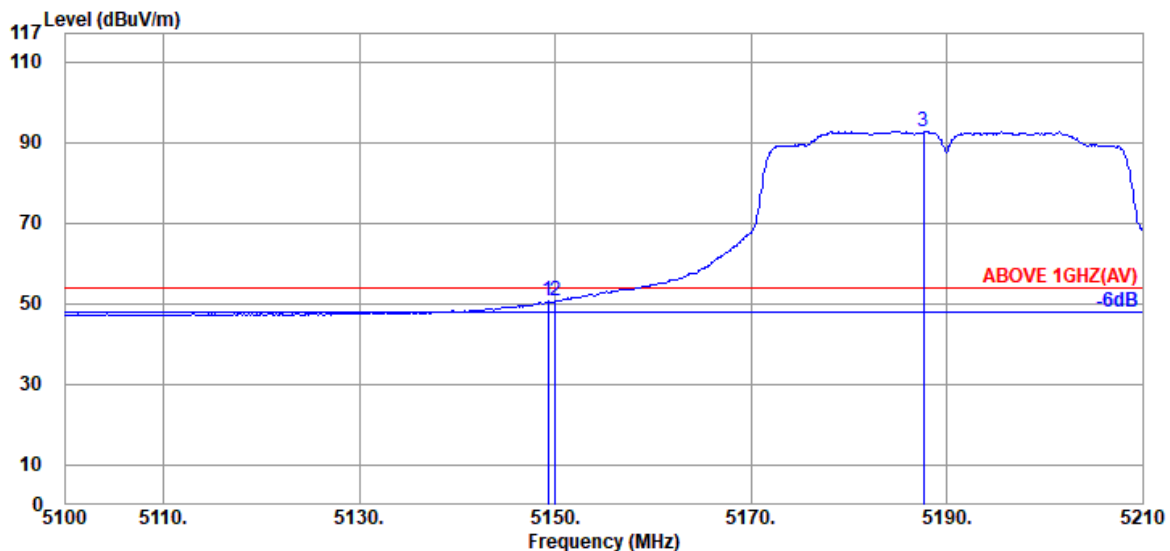

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.280	34.20	8.92	39.29	46.78	50.61	54.00	3.39	Average
5150.050	34.20	8.92	39.29	46.84	50.67	54.00	3.33	Average
@ 5187.670	34.40	8.95	39.28	88.75	92.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

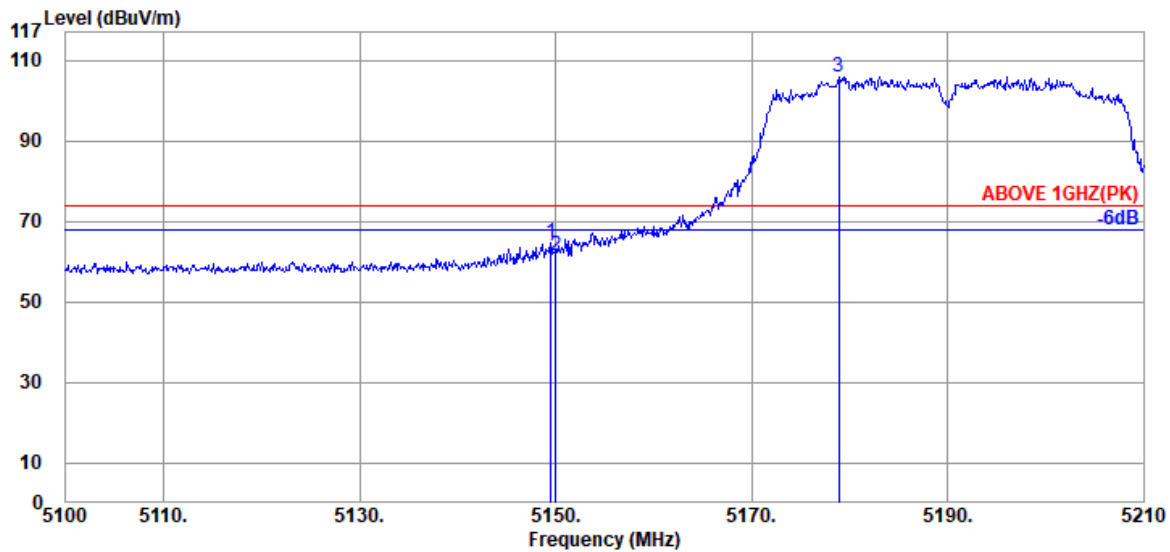

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	39.29	60.75	64.58	74.00	9.42	Peak
5150.050	34.20	8.92	39.29	57.86	61.69	74.00	12.31	Peak
@ 5178.870	34.33	8.95	39.28	101.88	105.88	---	---	Peak

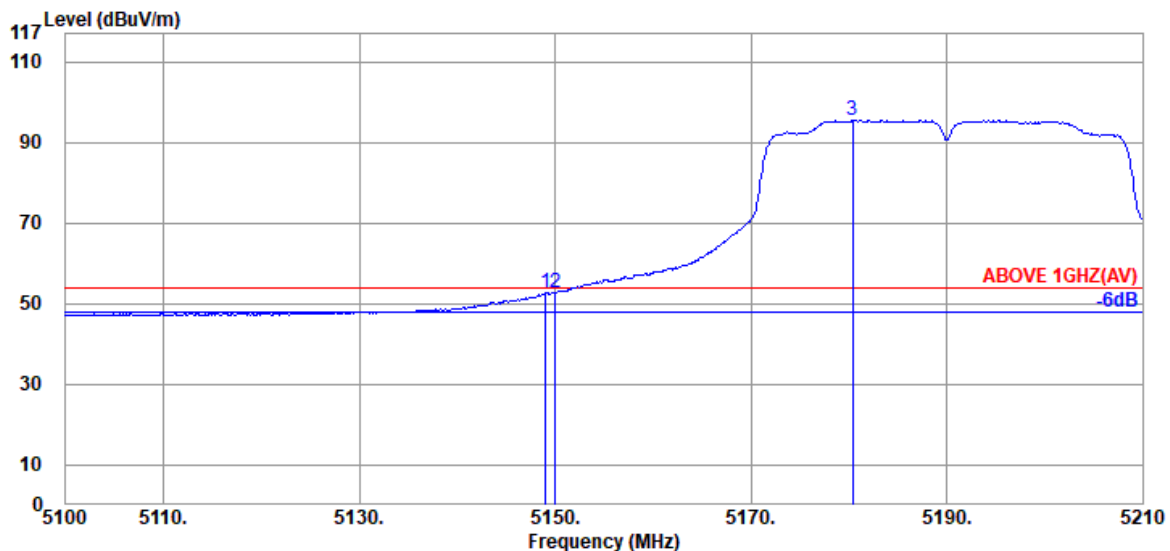

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	39.29	48.86	52.69	54.00	1.31	Average
5150.050	34.20	8.92	39.29	48.86	52.69	54.00	1.31	Average
@ 5180.410	34.33	8.95	39.28	91.49	95.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

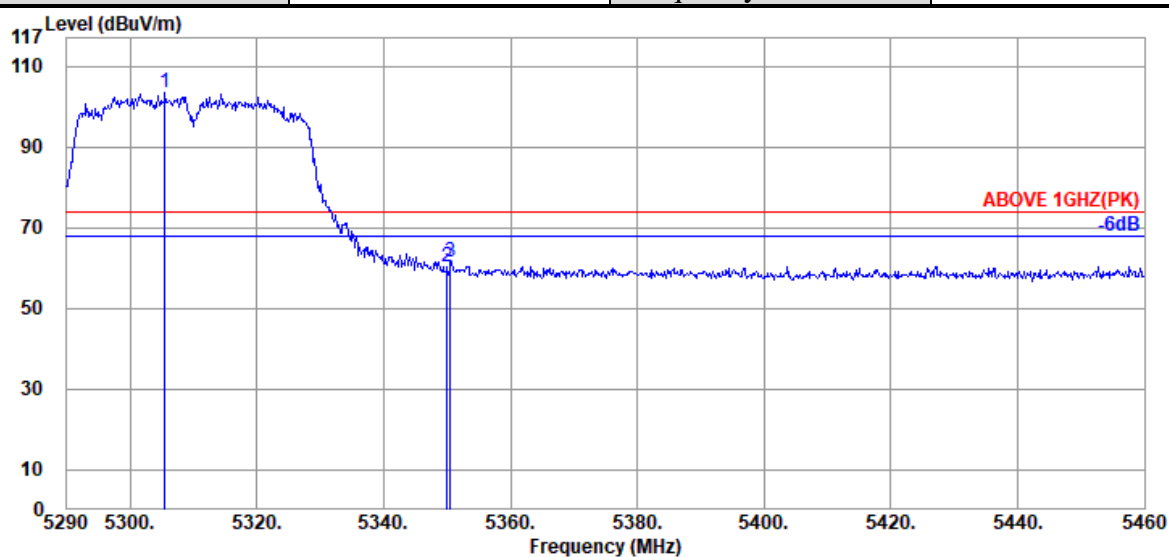

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5305.470	34.50	9.05	39.28	99.19	103.46	---	---	Peak
	5350.010	34.80	9.10	39.27	55.71	60.34	74.00	13.66	Peak
	5350.520	34.80	9.10	39.27	56.99	61.62	74.00	12.38	Peak

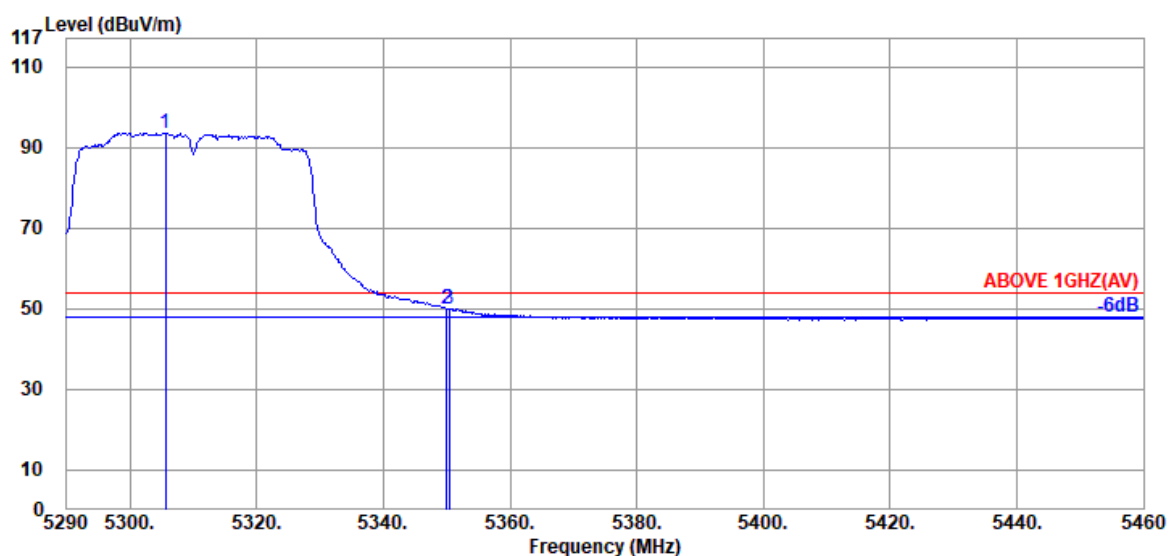

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5305.640	34.50	9.05	39.28	89.31	93.58	---	---	Average
	5350.010	34.80	9.10	39.27	45.28	49.91	54.00	4.09	Average
	5350.350	34.80	9.10	39.27	45.31	49.94	54.00	4.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

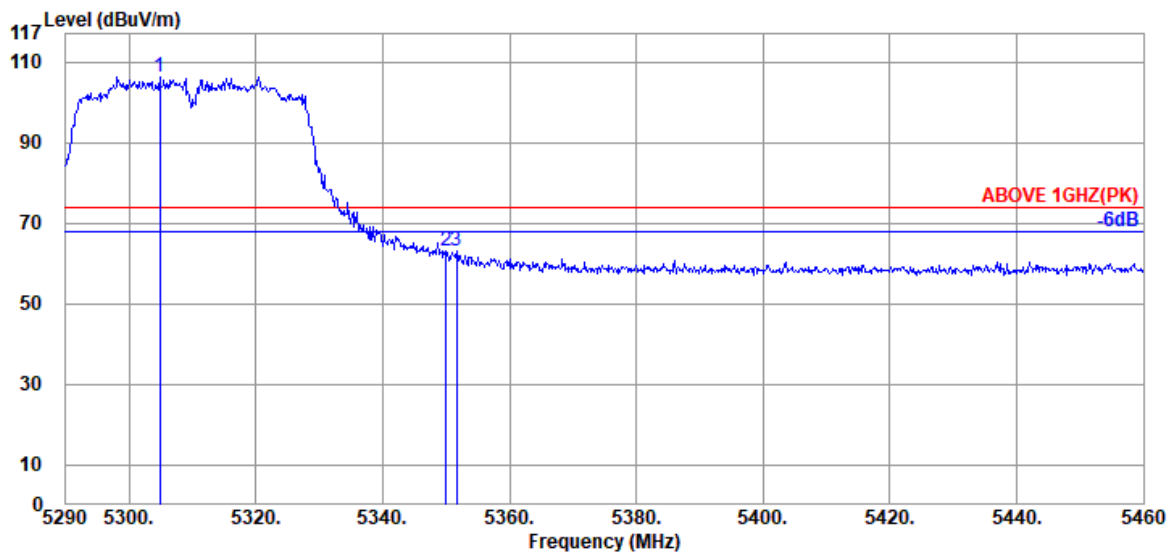

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.790	34.50	9.05	39.28	102.13	106.40	---	---	Peak
5350.010	34.80	9.10	39.27	58.38	63.01	74.00	10.99	Peak
5351.710	34.80	9.10	39.27	58.42	63.05	74.00	10.95	Peak

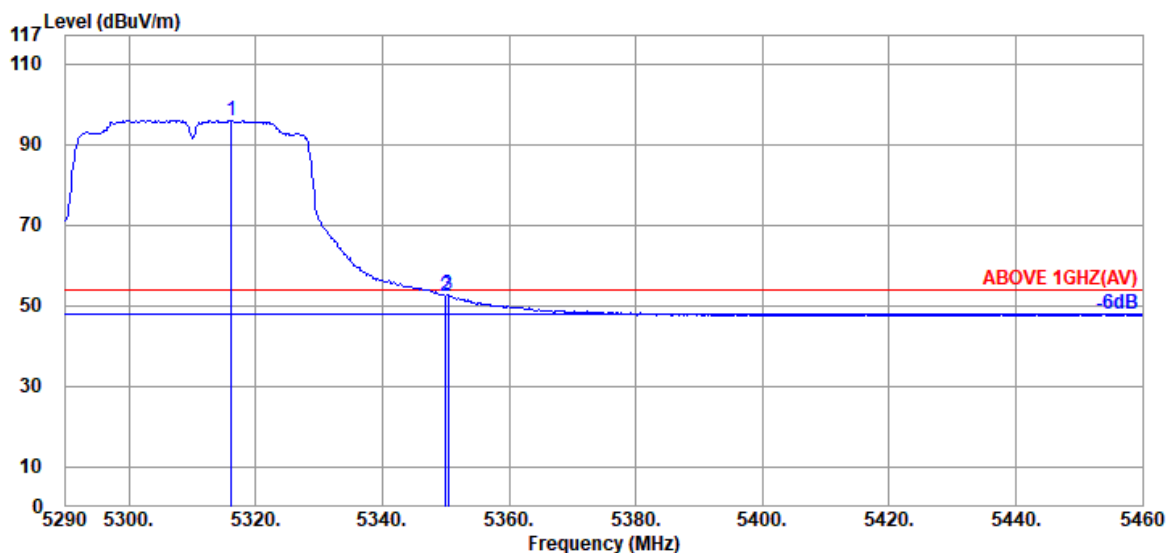

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	34.60	9.07	39.27	91.63	96.03	---	---	Average
5350.010	34.80	9.10	39.27	47.86	52.49	54.00	1.51	Average
5350.350	34.80	9.10	39.27	47.93	52.56	54.00	1.44	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

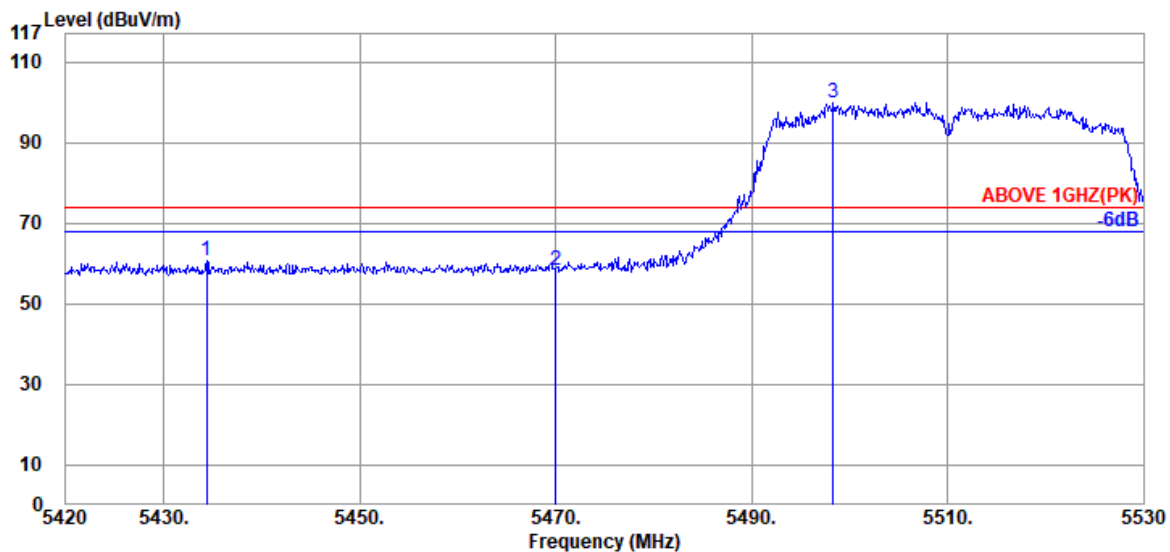

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.410	35.00	9.17	39.26	55.60	60.51	74.00	13.49	Peak
5470.050	34.97	9.20	39.26	53.55	58.46	74.00	15.54	Peak
@ 5498.320	34.90	9.23	39.26	95.14	100.01	---	---	Peak

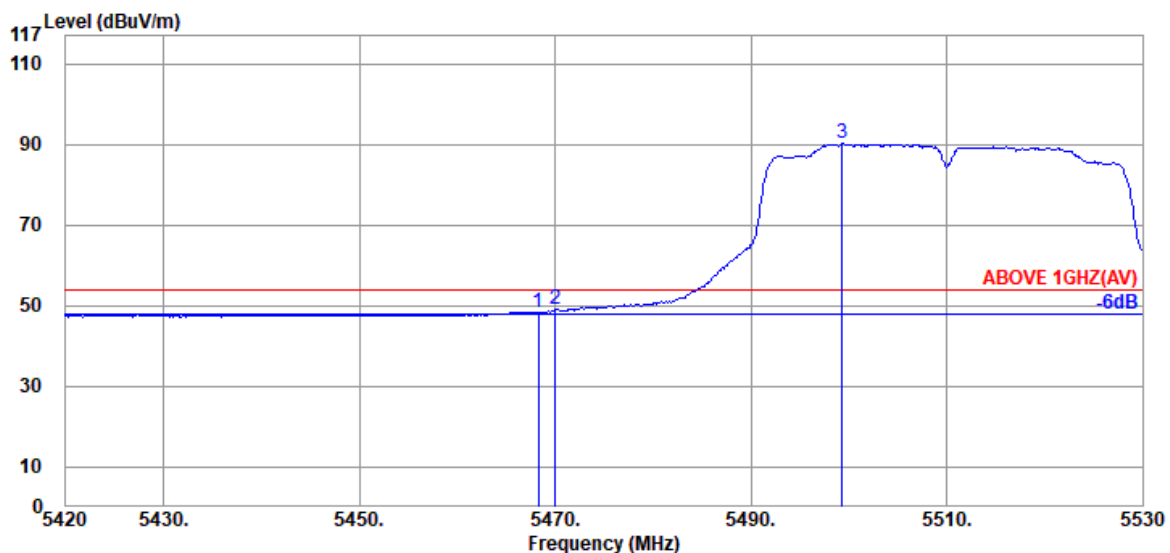

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.97	9.20	39.26	43.58	48.49	54.00	5.51	Average
5470.050	34.97	9.20	39.26	44.04	48.95	54.00	5.05	Average
@ 5499.310	34.90	9.23	39.26	85.20	90.07	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

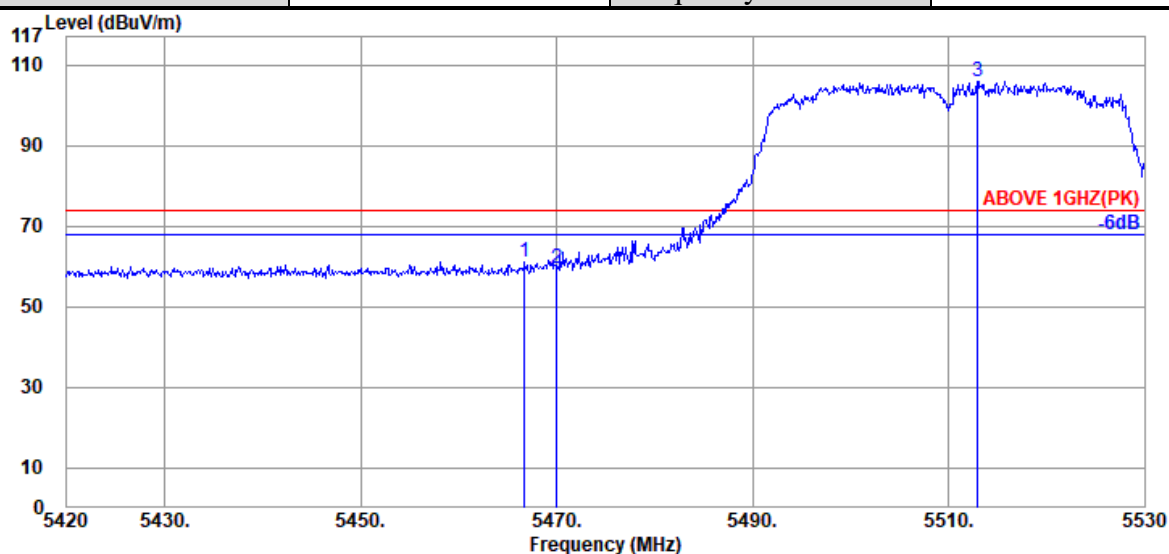

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	34.97	9.20	39.26	56.35	61.26	74.00	12.74	Peak
5470.050	34.97	9.20	39.26	54.42	59.33	74.00	14.67	Peak
@ 5512.950	34.87	9.23	39.26	101.09	105.93	---	---	Peak

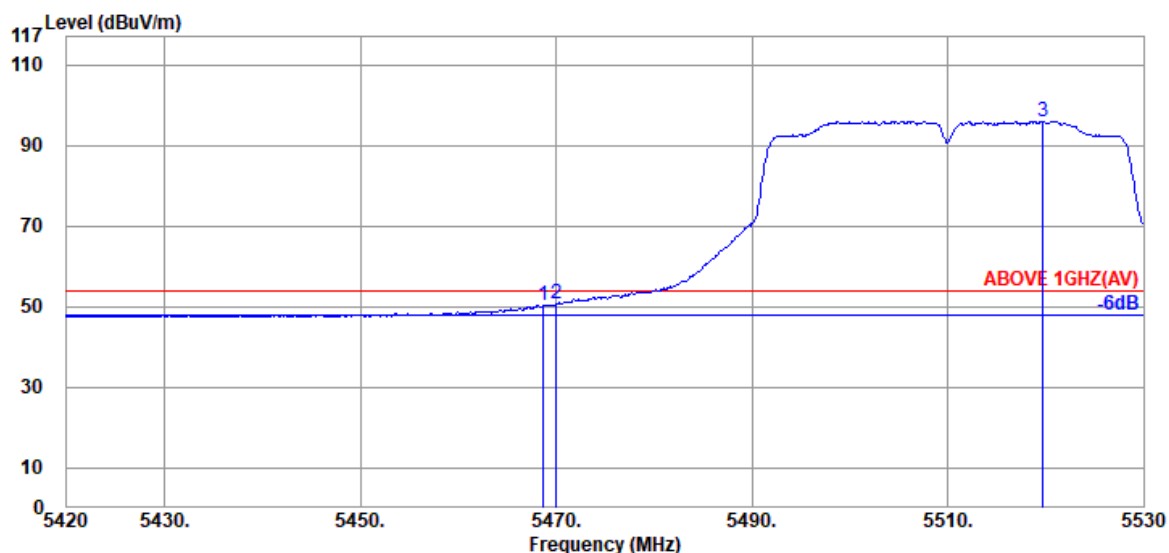


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	34.97	9.20	39.26	45.43	50.34	54.00	3.66	Average
5470.050	34.97	9.20	39.26	45.84	50.75	54.00	3.25	Average
@ 5519.770	34.87	9.24	39.26	91.05	95.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

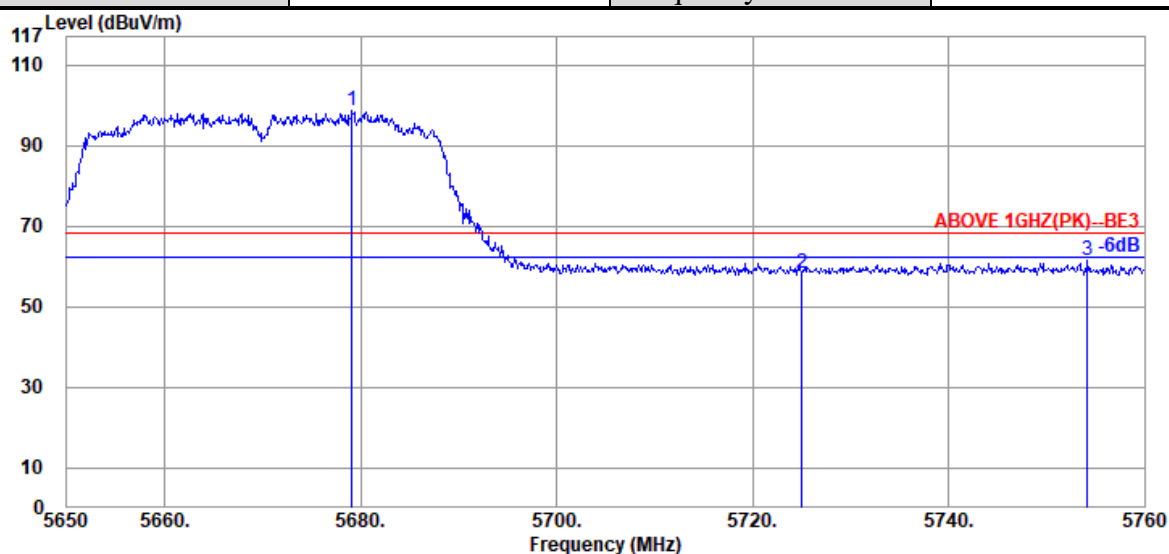

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5679.150	34.57	9.37	39.29	94.03	98.68	---	---	Peak
5725.020	34.57	9.42	39.30	53.75	58.44	68.20	9.76	Peak
5754.170	34.60	9.45	39.31	56.75	61.49	68.20	6.71	Peak

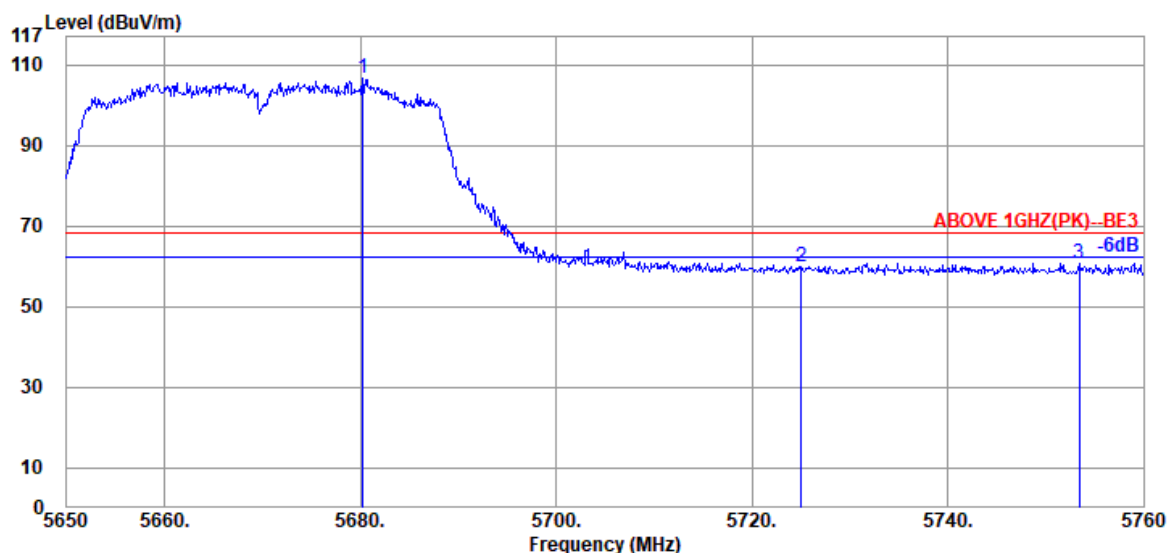

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5680.250	34.57	9.37	39.29	101.91	106.56	---	---	Peak
5725.020	34.57	9.42	39.30	55.23	59.92	68.20	8.28	Peak
5753.400	34.60	9.45	39.31	56.10	60.84	68.20	7.36	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

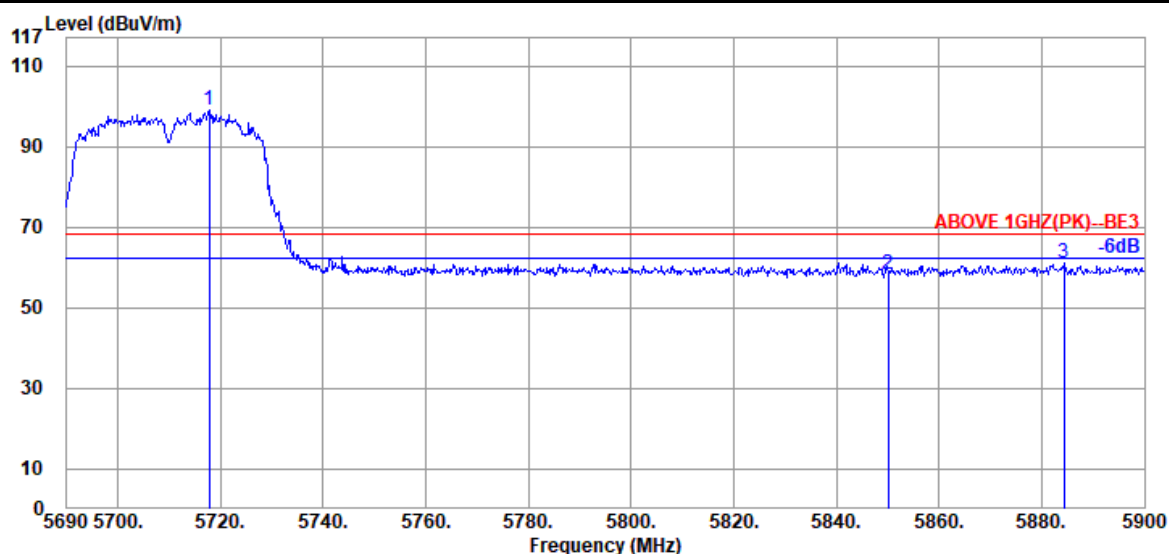

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.720	34.53	9.42	39.30	94.25	98.90	---	---	Peak
	5850.020	34.60	9.52	39.32	53.31	58.11	68.20	10.09	Peak
	5884.250	34.60	9.55	39.33	56.46	61.28	68.20	6.92	Peak

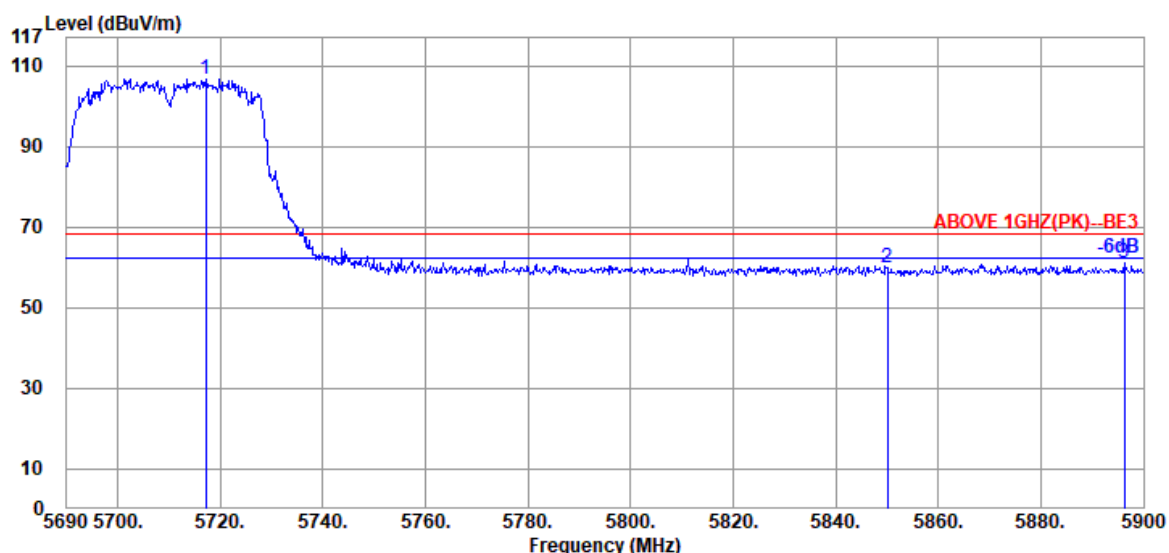

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.090	34.53	9.40	39.30	102.09	106.72	---	---	Peak
	5850.020	34.60	9.52	39.32	54.98	59.78	68.20	8.42	Peak
	5896.220	34.60	9.56	39.33	56.15	60.98	68.20	7.22	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

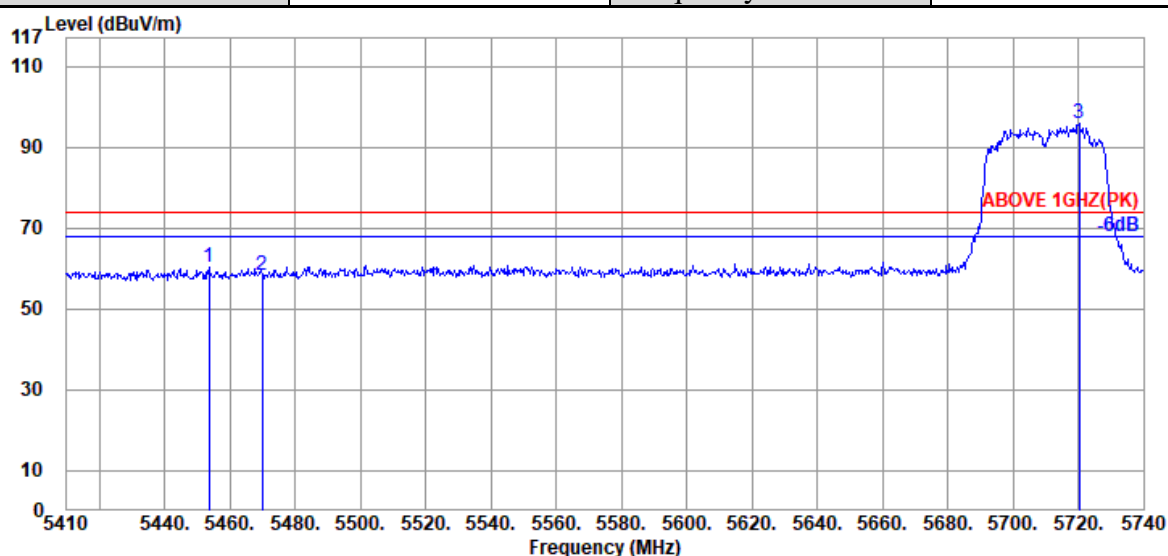

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.560	35.00	9.05	34.21	50.41	60.25	74.00	13.75	Peak
5470.060	34.97	9.06	34.21	48.56	58.38	74.00	15.62	Peak
@ 5720.200	34.53	9.19	34.30	86.27	95.69	---	---	Peak

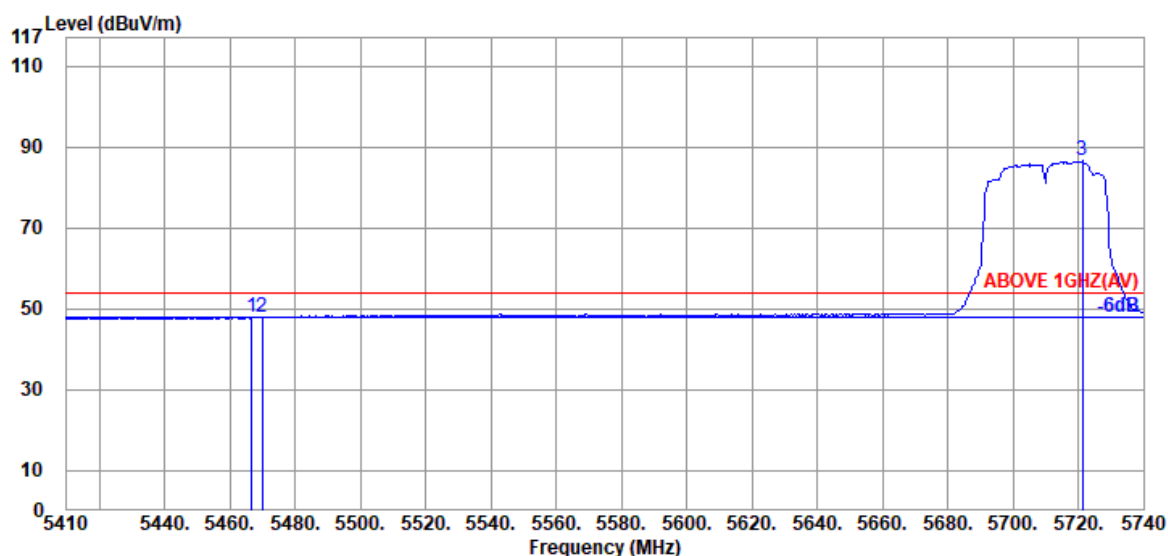


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.760	34.97	9.06	34.21	38.17	47.99	54.00	6.01	Average
5470.060	34.97	9.06	34.21	37.90	47.72	54.00	6.28	Average
@ 5721.190	34.53	9.19	34.30	77.07	86.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

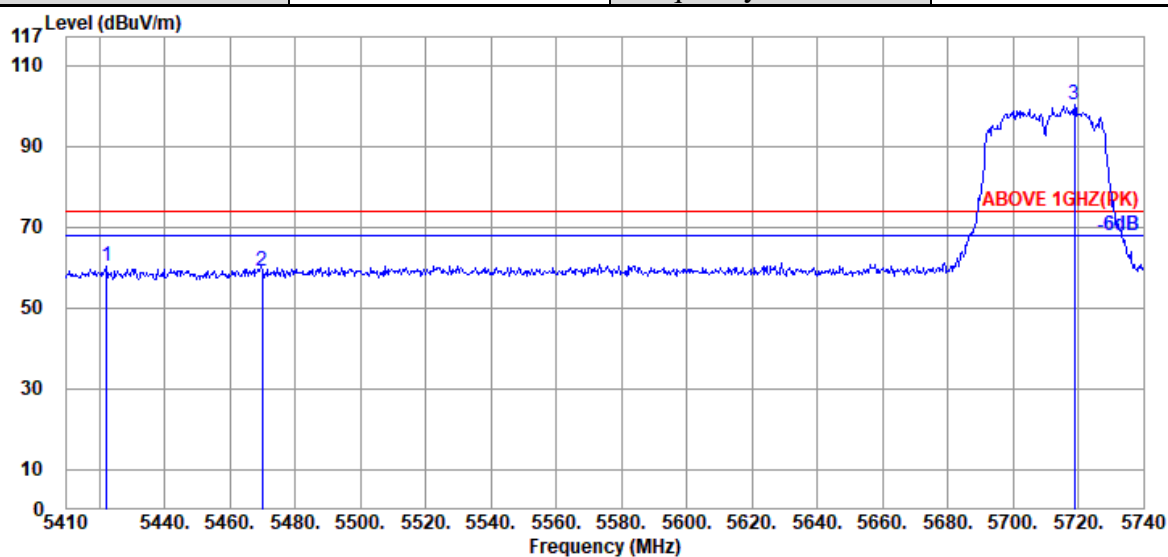

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.210	35.00	9.04	34.23	50.51	60.32	74.00	13.68	Peak
5470.060	34.97	9.06	34.21	49.36	59.18	74.00	14.82	Peak
@ 5718.880	34.53	9.19	34.30	90.63	100.05	---	---	Peak

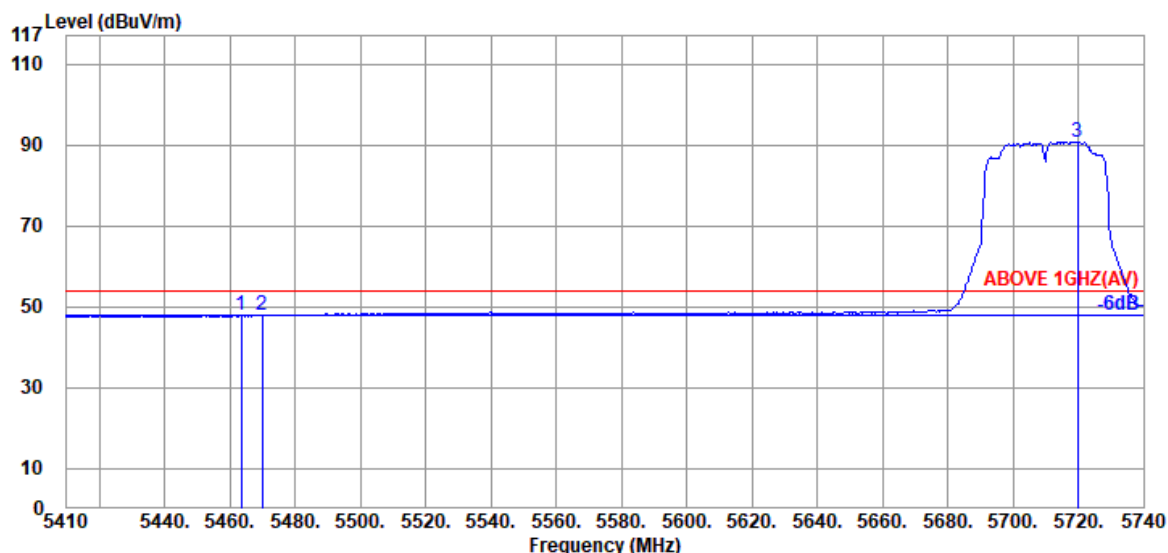

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.460	35.00	9.05	34.21	38.18	48.02	54.00	5.98	Average
5470.060	34.97	9.06	34.21	38.11	47.93	54.00	6.07	Average
@ 5719.870	34.53	9.19	34.30	81.36	90.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

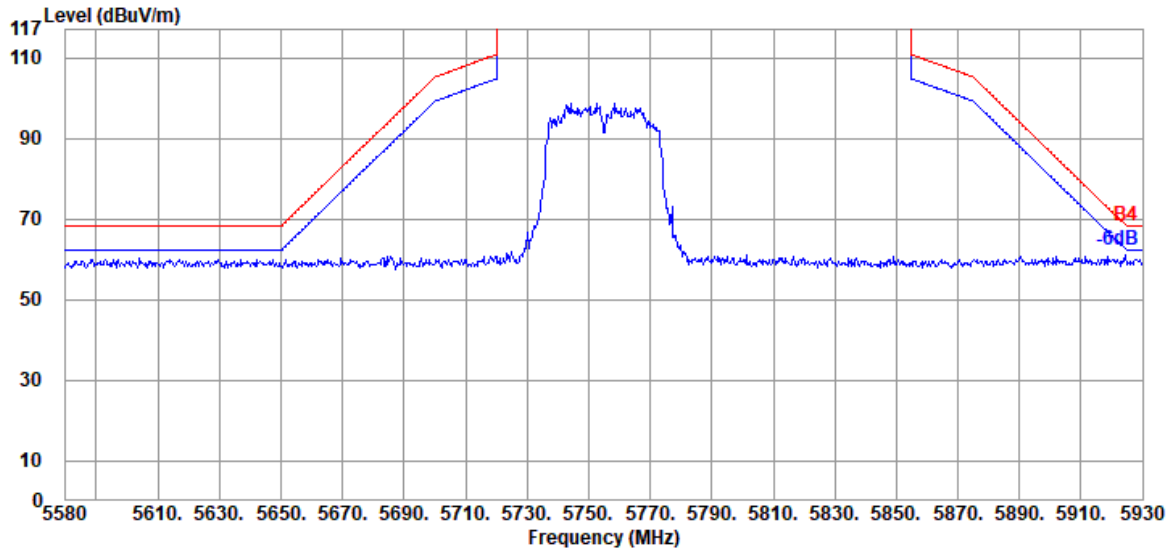

Antenna at Vertical Polarization

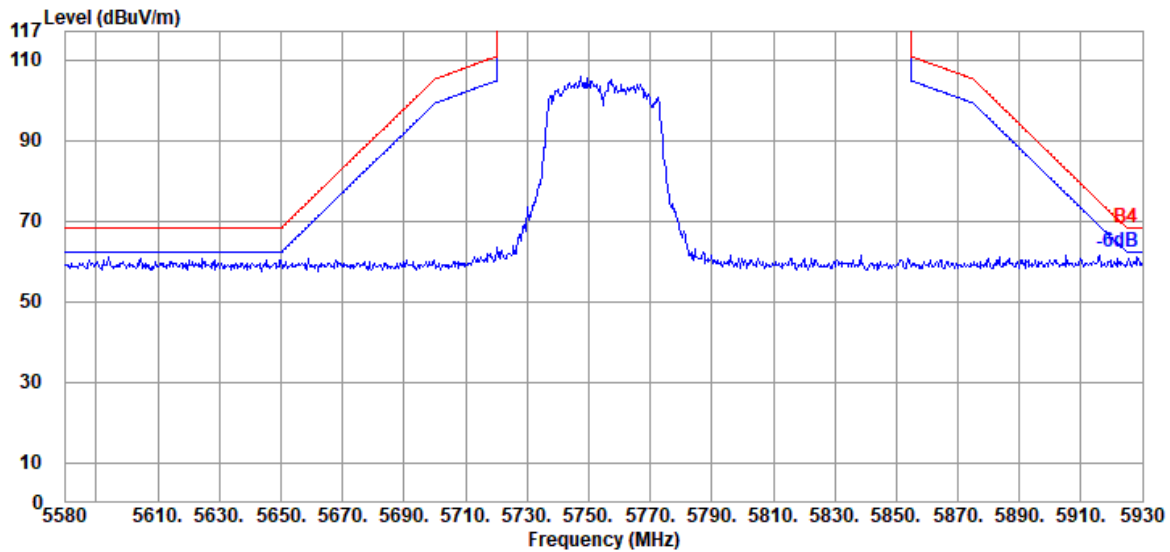


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

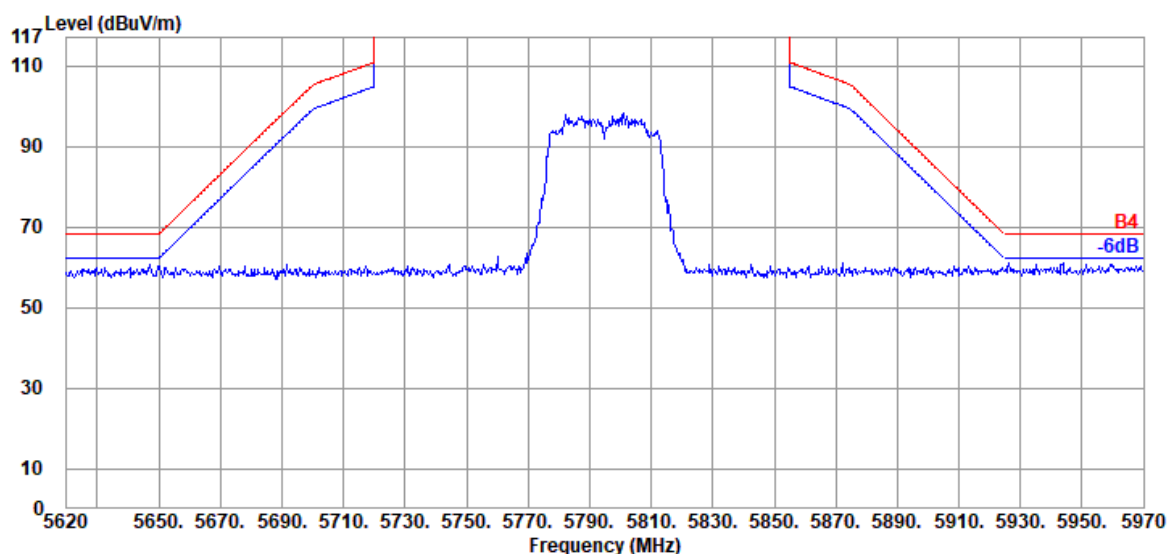


Antenna at Vertical Polarization

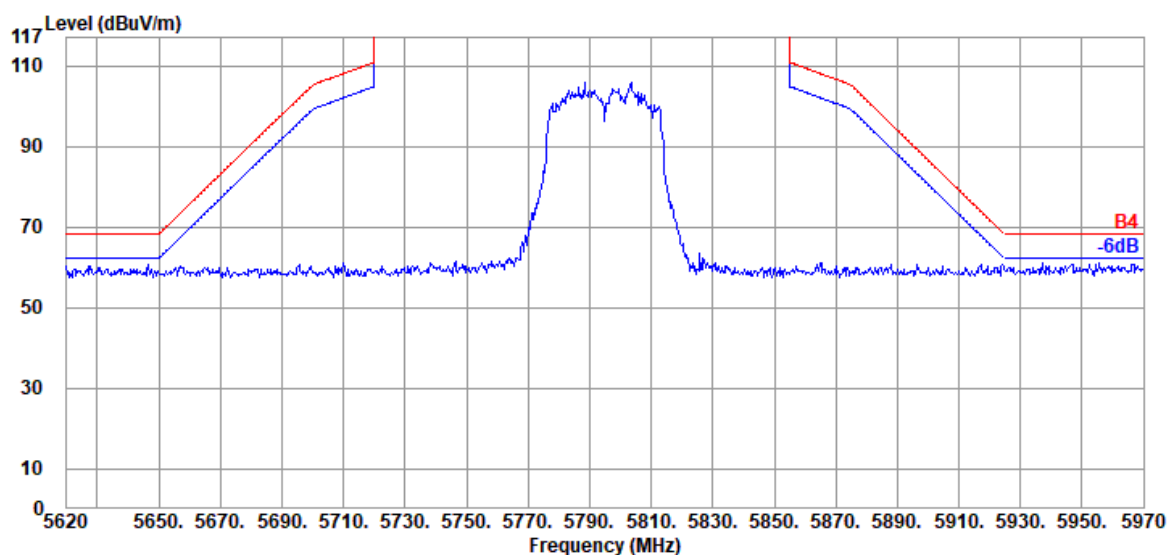

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

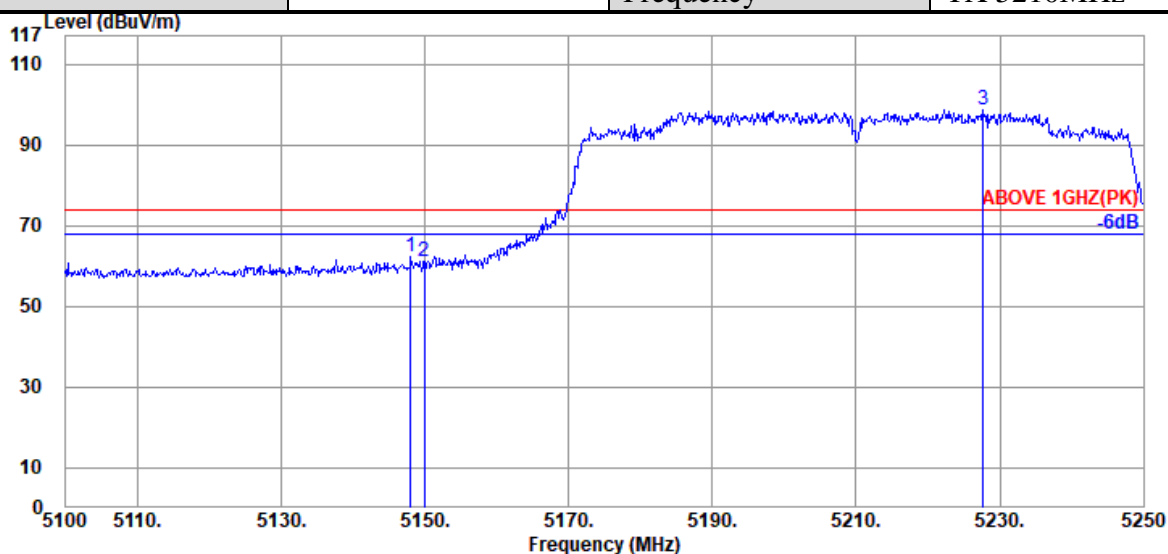

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.20	8.92	39.29	58.41	62.24	74.00	11.76	Peak
5149.950	34.20	8.92	39.29	57.21	61.04	74.00	12.96	Peak
@ 5227.650	34.40	8.99	39.28	94.45	98.56	---	---	Peak

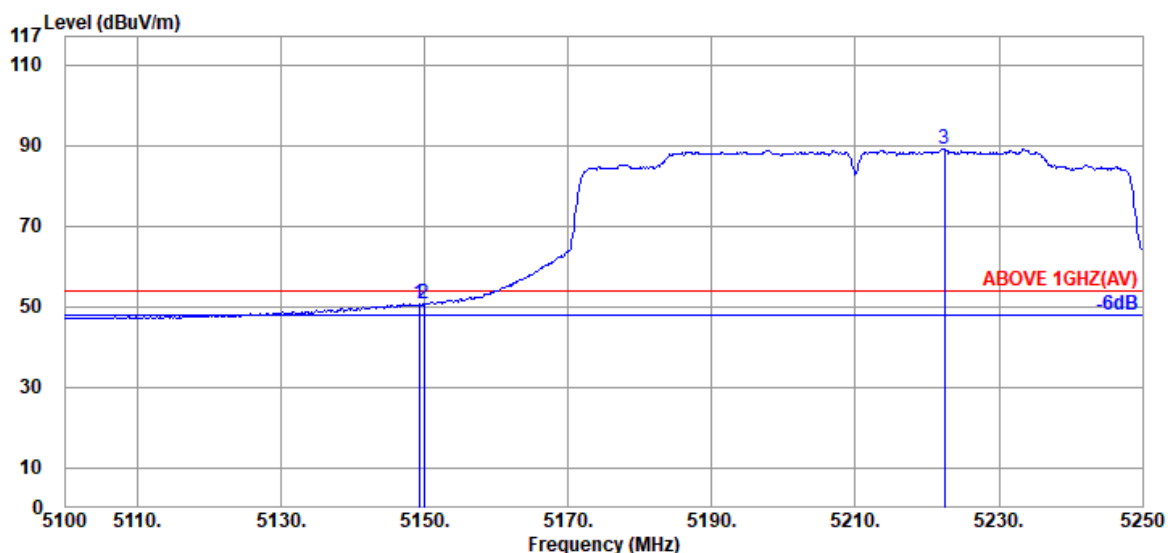


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	8.92	39.29	47.04	50.87	54.00	3.13	Average
5149.950	34.20	8.92	39.29	47.06	50.89	54.00	3.11	Average
@ 5222.400	34.40	8.98	39.28	85.08	89.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

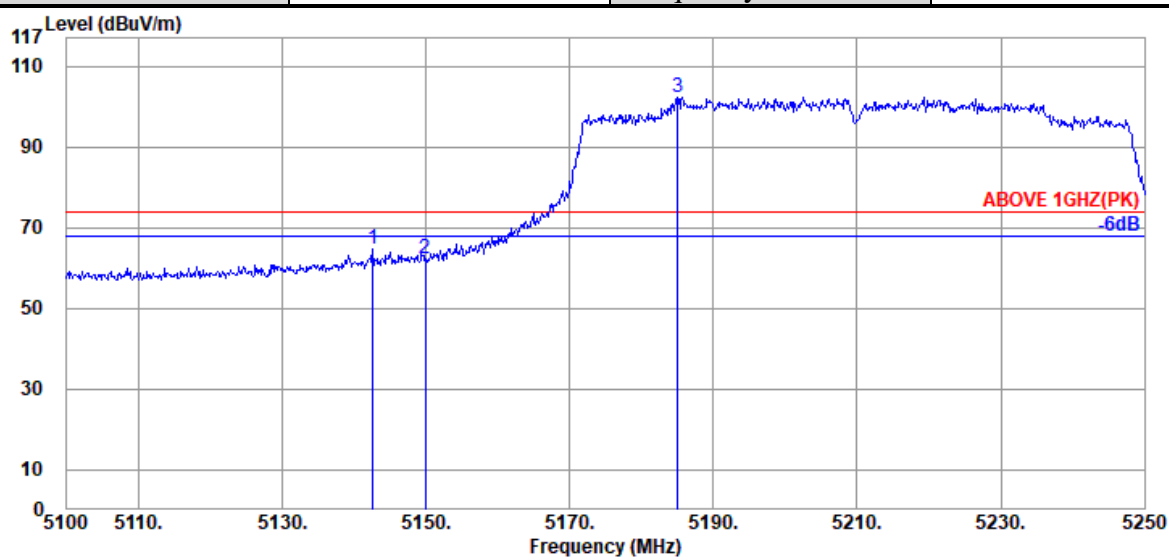

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.600	34.20	8.92	39.29	60.73	64.56	74.00	9.44	Peak
5149.950	34.20	8.92	39.29	58.43	62.26	74.00	11.74	Peak
@ 5185.050	34.33	8.95	39.28	98.39	102.39	---	---	Peak

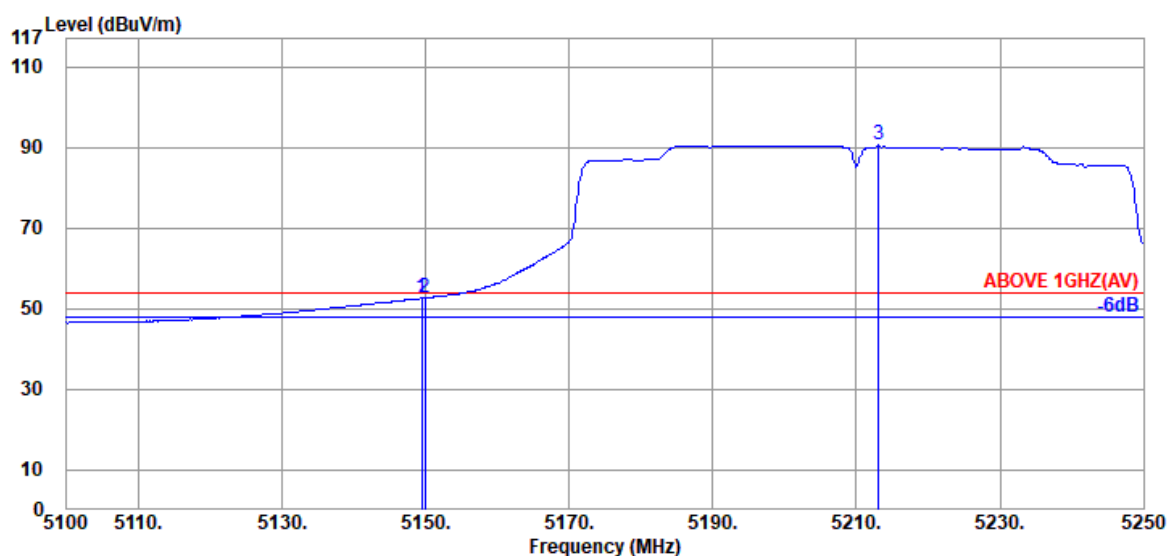

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	39.29	48.76	52.59	54.00	1.41	Average
5149.950	34.20	8.92	39.29	48.78	52.61	54.00	1.39	Average
@ 5213.100	34.40	8.98	39.28	86.38	90.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

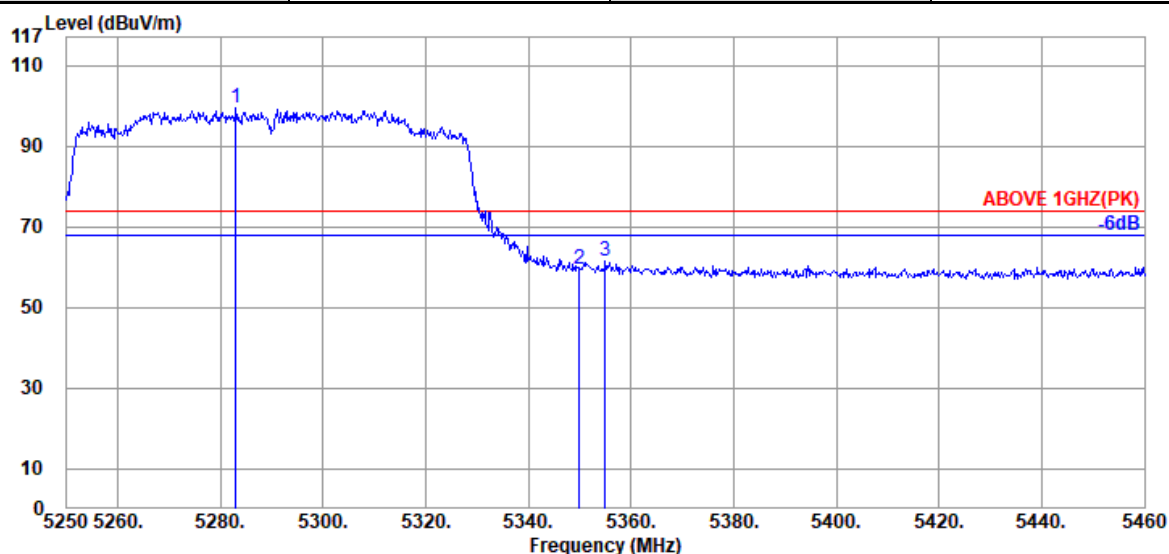

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.970	34.47	9.04	39.28	95.26	99.49	---	---	Peak
5349.960	34.80	9.10	39.27	54.78	59.41	74.00	14.59	Peak
5355.000	34.87	9.10	39.27	56.94	61.64	74.00	12.36	Peak

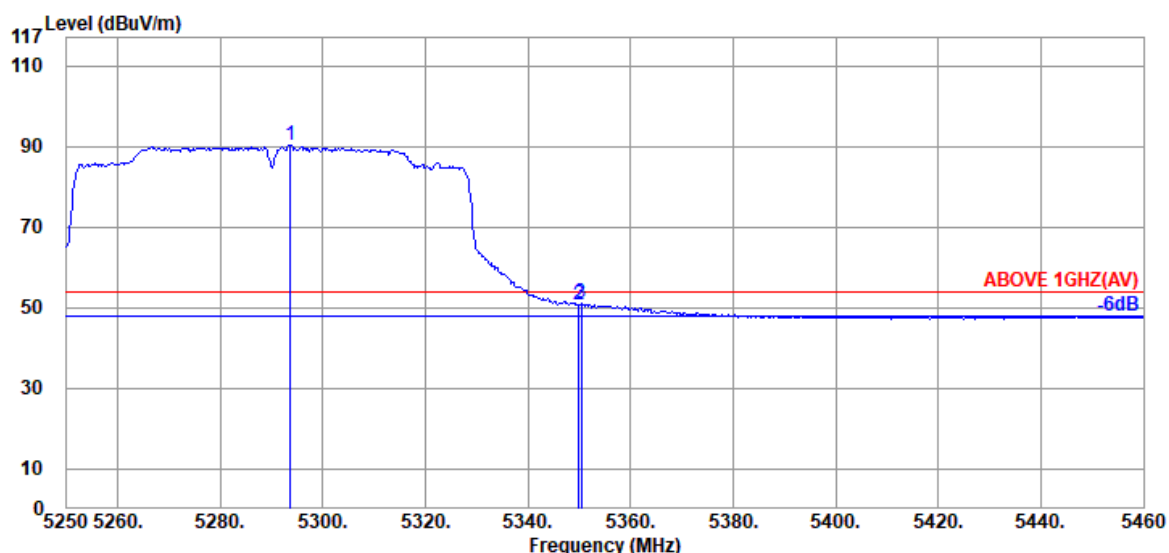

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.680	34.50	9.05	39.28	86.01	90.28	---	---	Average
5349.960	34.80	9.10	39.27	45.93	50.56	54.00	3.44	Average
5350.380	34.80	9.10	39.27	46.30	50.93	54.00	3.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

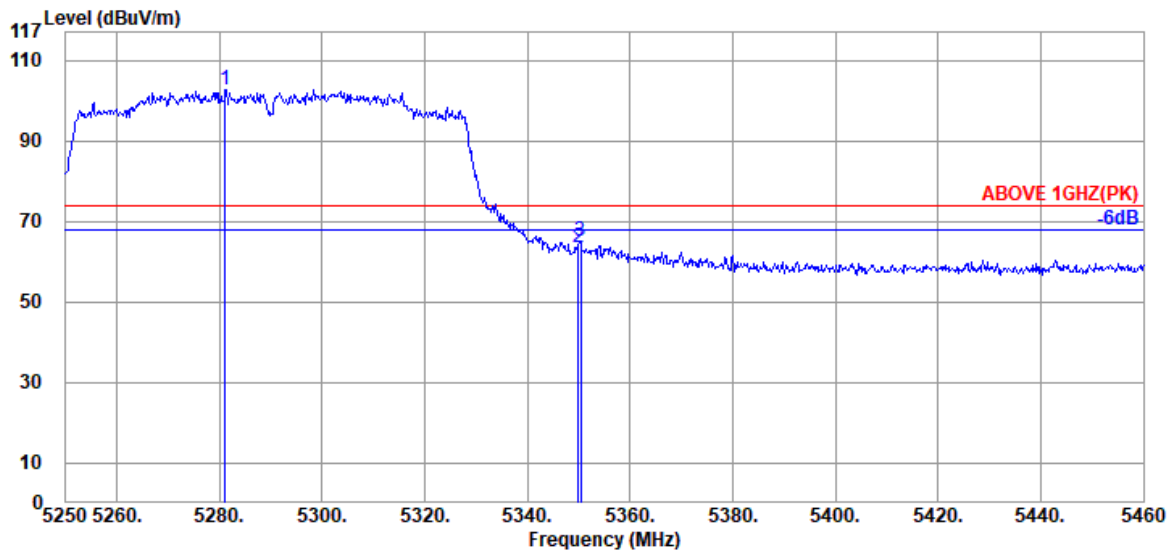

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.080	34.47	9.04	39.28	98.47	102.70	---	---	Peak
5349.960	34.80	9.10	39.27	58.95	63.58	74.00	10.42	Peak
5350.380	34.80	9.10	39.27	60.34	64.97	74.00	9.03	Peak

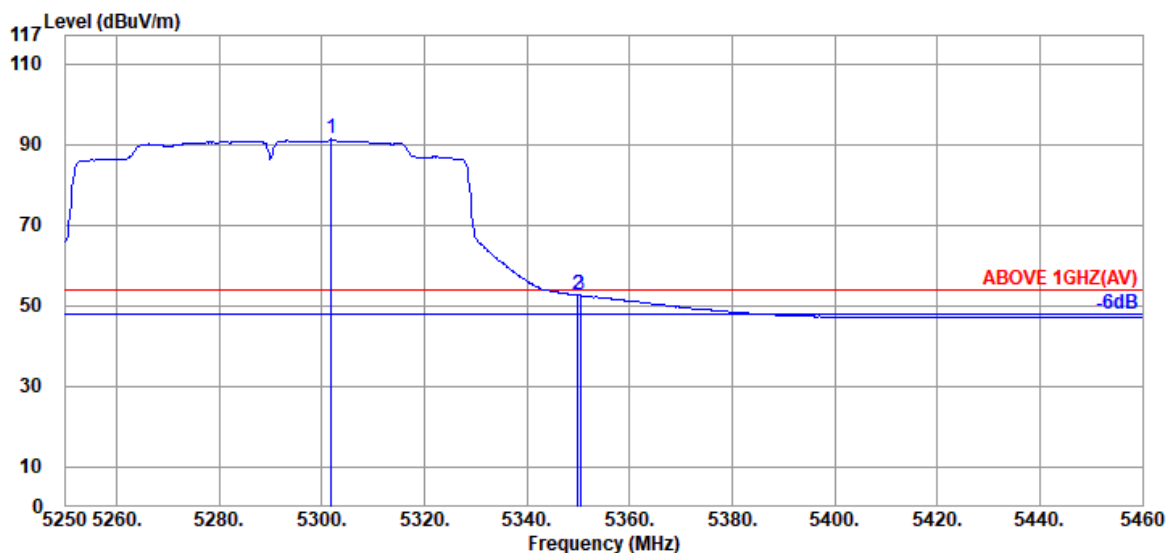

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.870	34.50	9.05	39.28	87.03	91.30	---	---	Average
5349.960	34.80	9.10	39.27	48.06	52.69	54.00	1.31	Average
5350.380	34.80	9.10	39.27	47.92	52.55	54.00	1.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

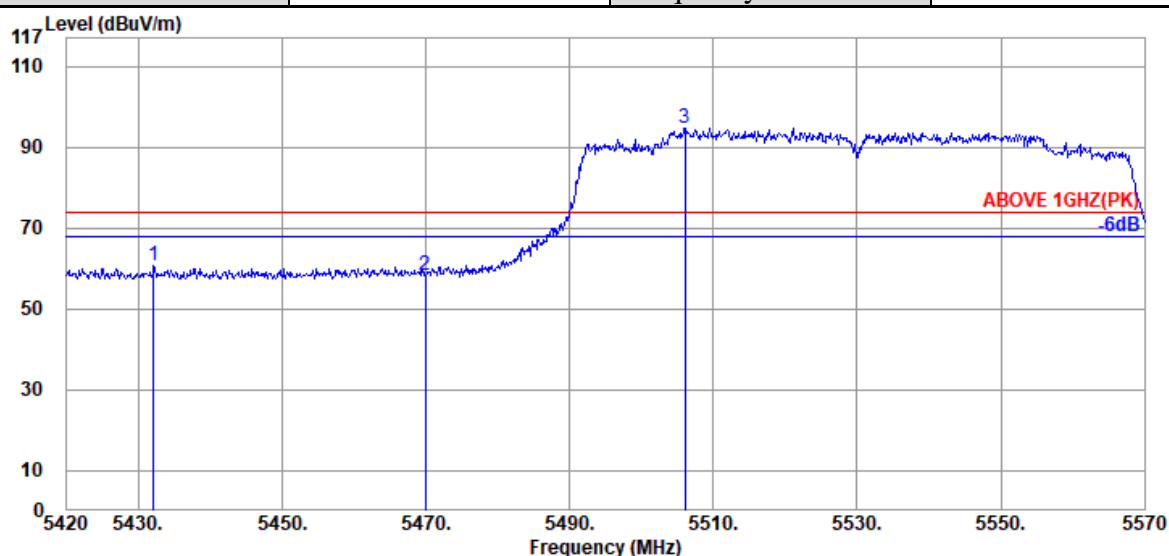

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.150	35.00	9.17	39.27	55.84	60.74	74.00	13.26	Peak
5469.950	34.97	9.20	39.26	53.40	58.31	74.00	15.69	Peak
@ 5506.100	34.90	9.23	39.26	89.92	94.79	---	---	Peak

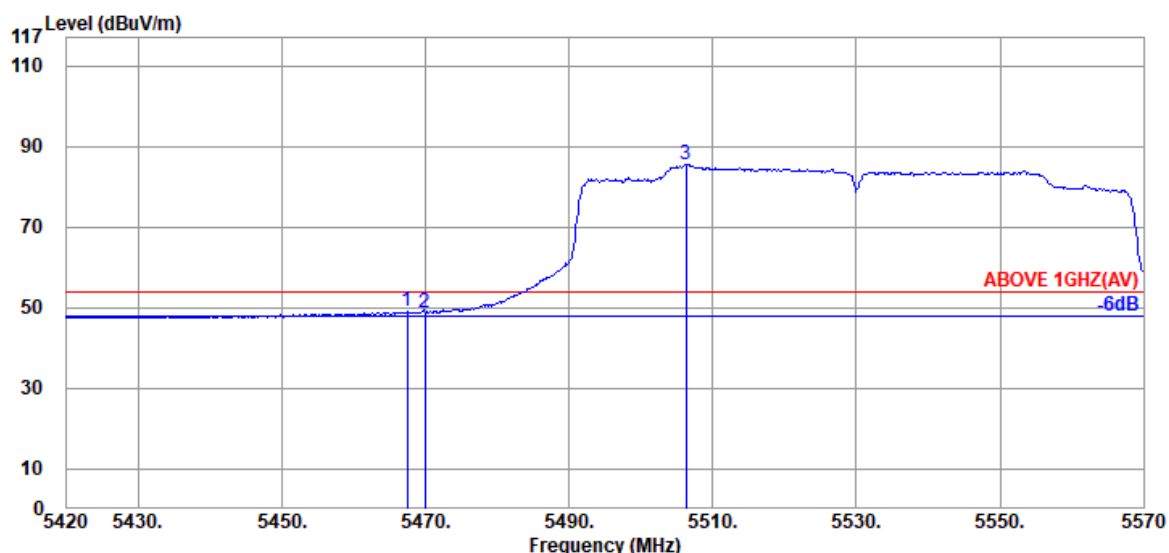


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.97	9.20	39.26	44.16	49.07	54.00	4.93	Average
5469.950	34.97	9.20	39.26	43.99	48.90	54.00	5.10	Average
@ 5506.250	34.90	9.23	39.26	80.77	85.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

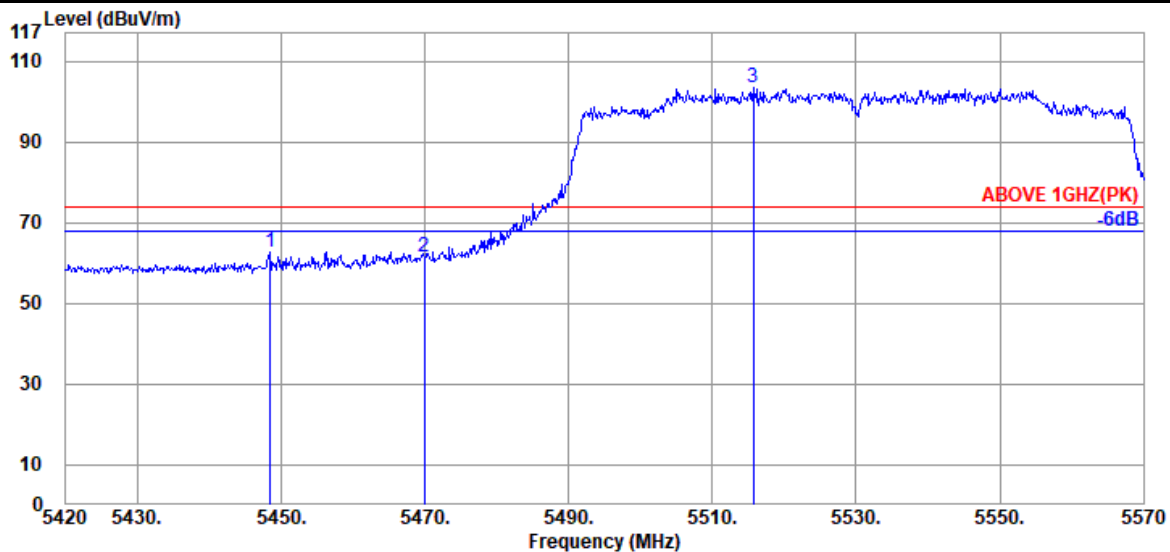

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.500	35.00	9.18	39.26	57.96	62.88	74.00	11.12	Peak
5469.950	34.97	9.20	39.26	56.76	61.67	74.00	12.33	Peak
@ 5515.700	34.87	9.24	39.26	98.41	103.26	---	---	Peak

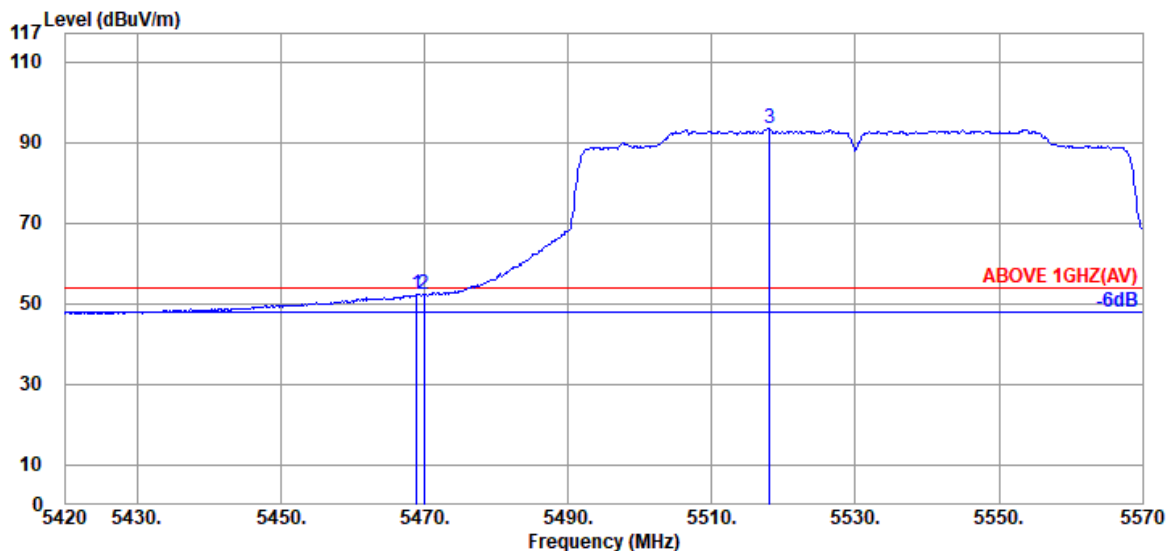

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	47.23	52.14	54.00	1.86	Average
5469.950	34.97	9.20	39.26	47.35	52.26	54.00	1.74	Average
@ 5518.100	34.87	9.24	39.26	88.48	93.33	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

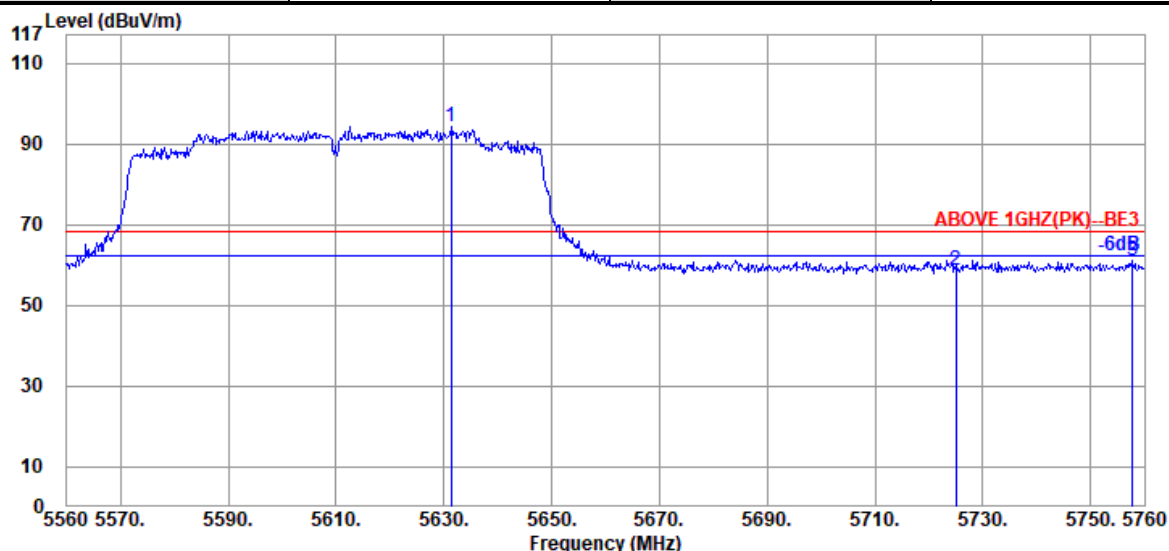

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.400	34.70	9.33	39.28	89.37	94.12	---	---	Peak
5725.000	34.57	9.42	39.30	54.18	58.87	68.20	9.33	Peak
5757.800	34.60	9.45	39.31	56.23	60.97	68.20	7.23	Peak

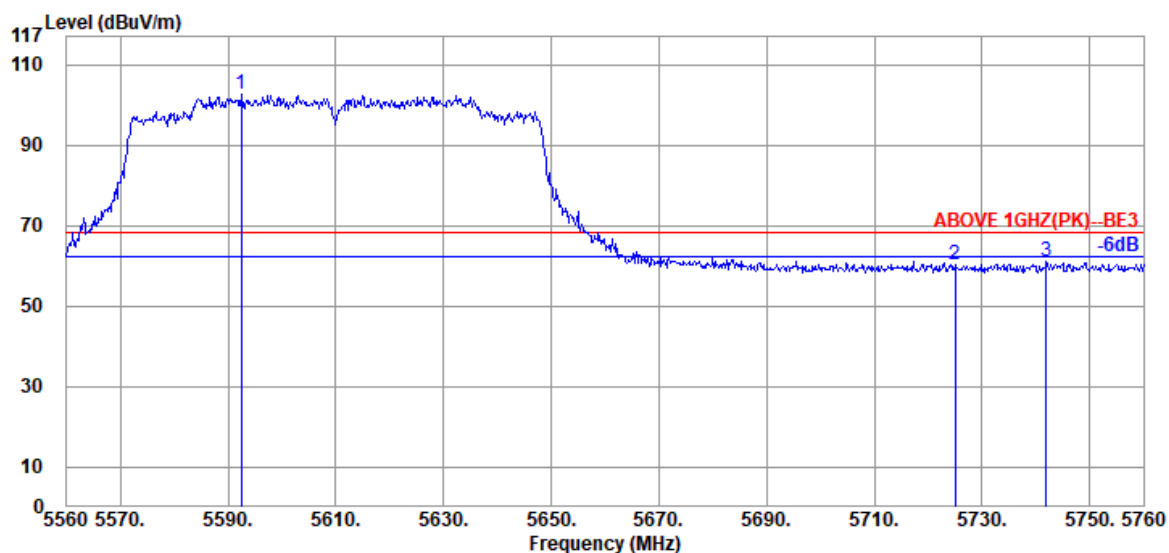

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.400	34.70	9.30	39.28	97.79	102.51	---	---	Peak
5725.000	34.57	9.42	39.30	55.44	60.13	68.20	8.07	Peak
5742.000	34.60	9.43	39.30	56.46	61.19	68.20	7.01	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

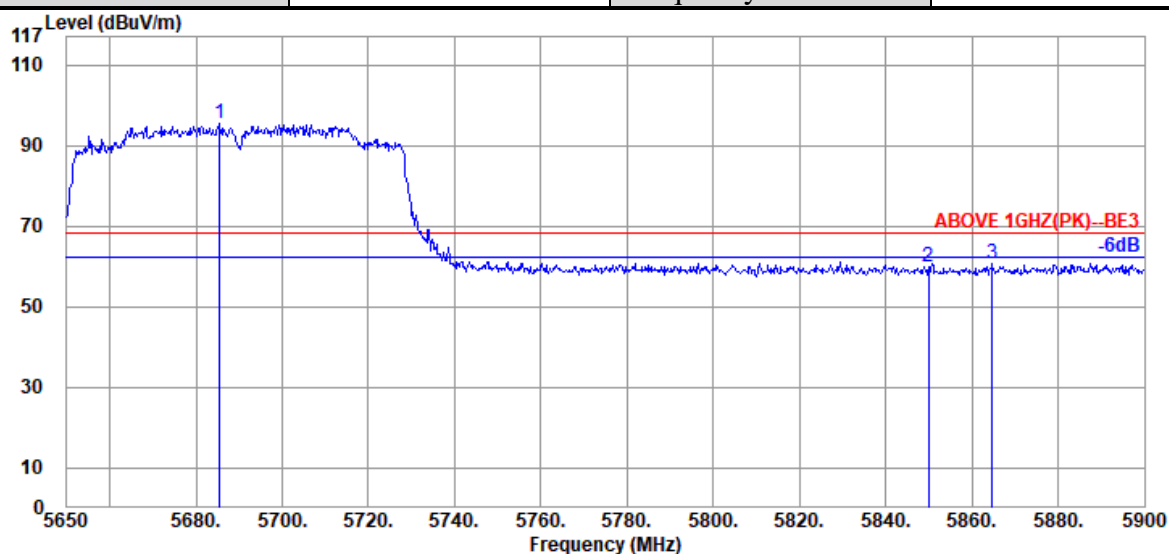

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5685.500	34.57	9.39	39.29	90.84	95.51	---	---	Peak
5850.000	34.60	9.52	39.32	55.15	59.95	68.20	8.25	Peak
5864.750	34.60	9.53	39.33	55.98	60.78	68.20	7.42	Peak

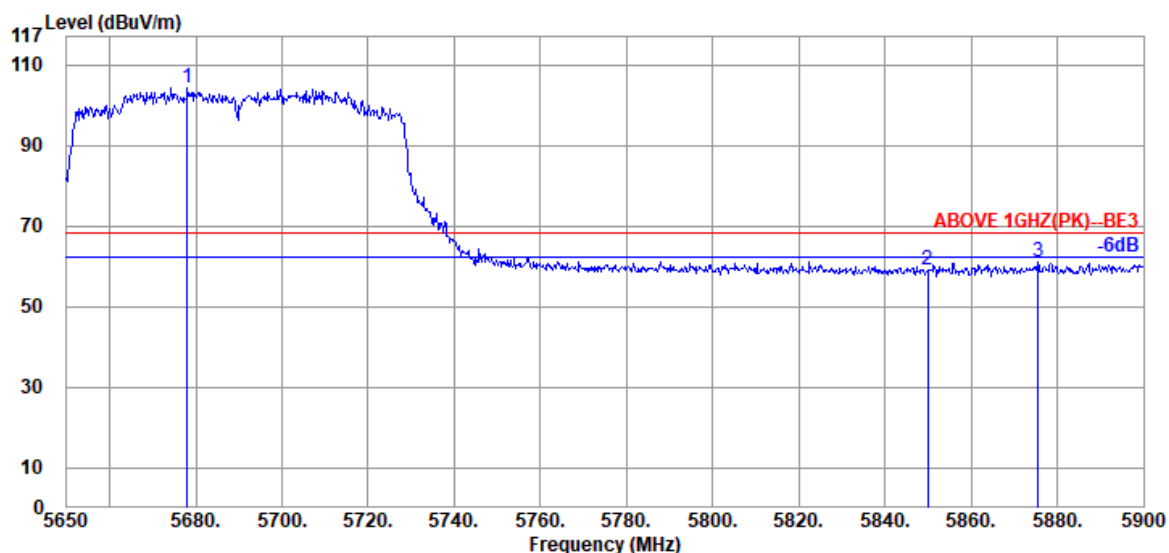

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.000	34.57	9.37	39.29	99.70	104.35	---	---	Peak
5850.000	34.60	9.52	39.32	54.13	58.93	68.20	9.27	Peak
5875.500	34.60	9.55	39.33	56.15	60.97	68.20	7.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

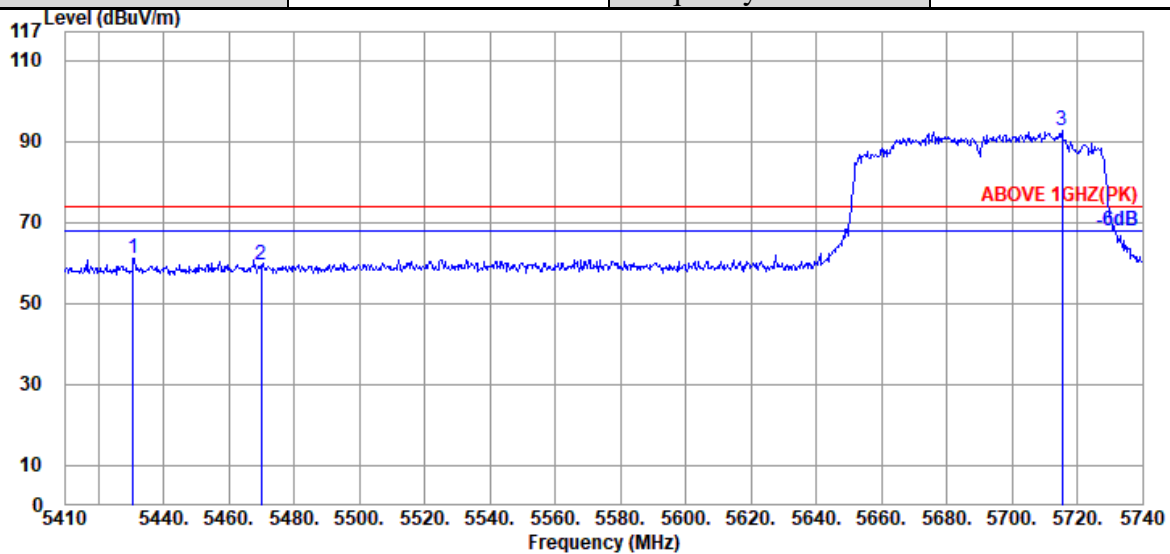

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.790	35.00	9.04	34.23	51.39	61.20	74.00	12.80	Peak
5470.060	34.97	9.06	34.21	49.51	59.33	74.00	14.67	Peak
@ 5715.250	34.53	9.19	34.30	83.03	92.45	---	---	Peak

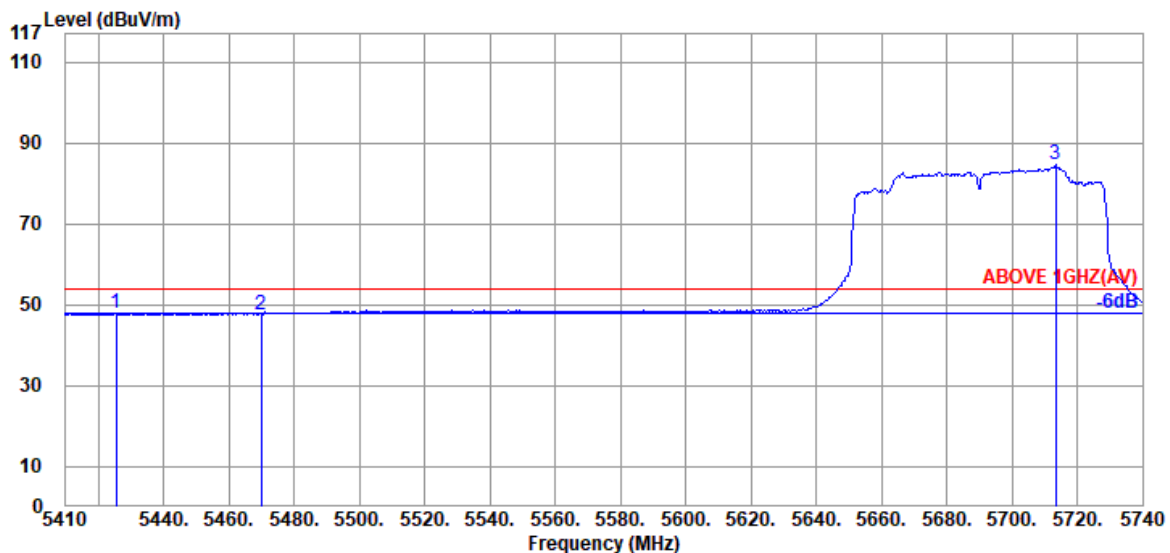


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.510	35.00	9.04	34.23	38.23	48.04	54.00	5.96	Average
5470.060	34.97	9.06	34.21	37.88	47.70	54.00	6.30	Average
@ 5713.270	34.53	9.19	34.30	75.14	84.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

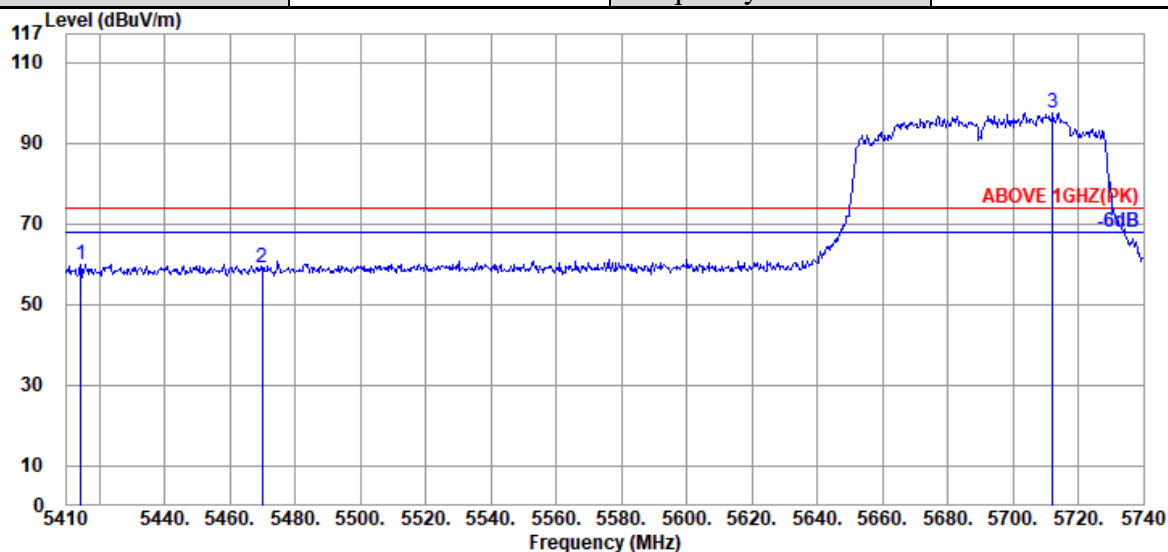

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.290	35.00	9.03	34.23	50.08	59.88	74.00	14.12	Peak
5470.060	34.97	9.06	34.21	49.15	58.97	74.00	15.03	Peak
@ 5712.280	34.53	9.19	34.30	88.20	97.62	---	---	Peak

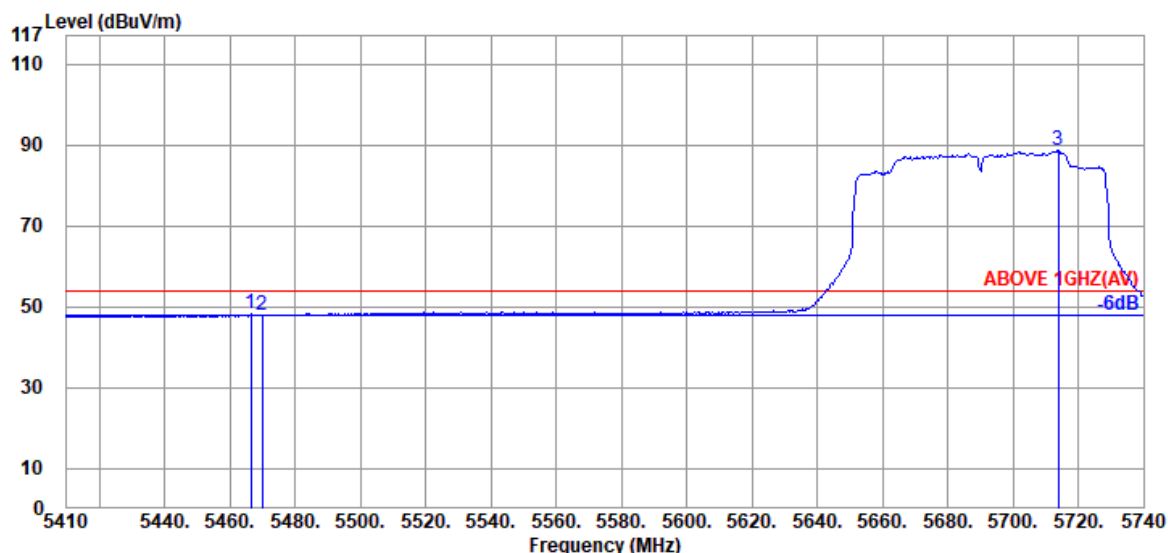

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.97	9.06	34.21	38.31	48.13	54.00	5.87	Average
5470.060	34.97	9.06	34.21	37.91	47.73	54.00	6.27	Average
@ 5713.930	34.53	9.19	34.30	79.09	88.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

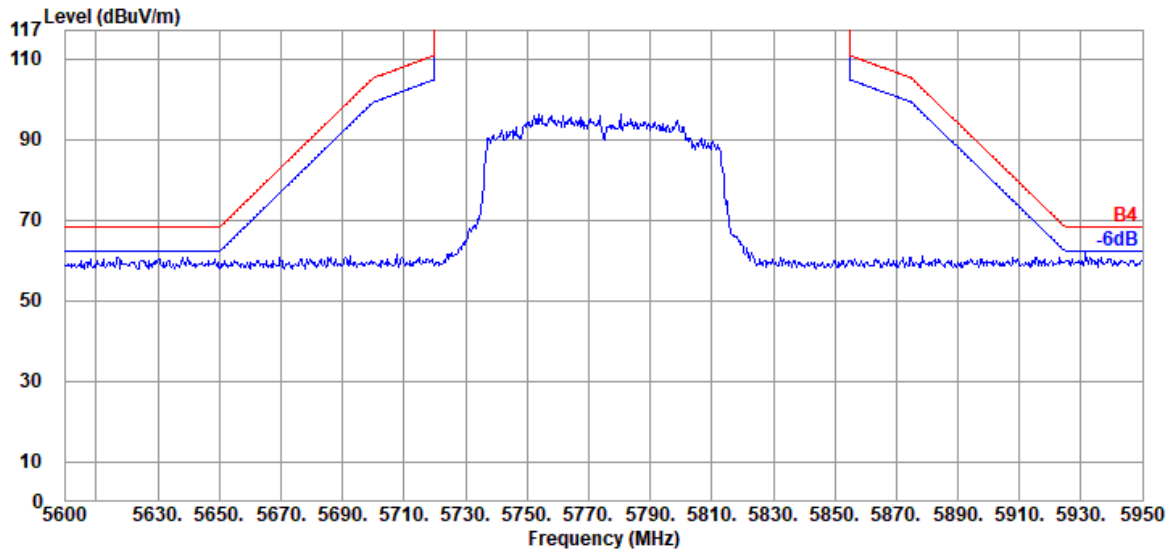

Antenna at Vertical Polarization

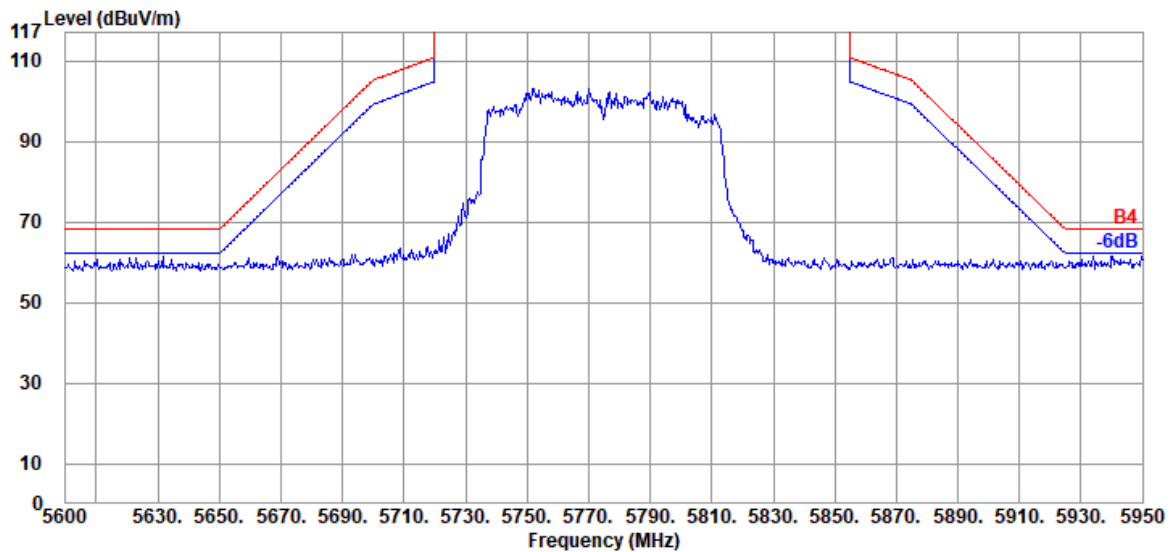


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

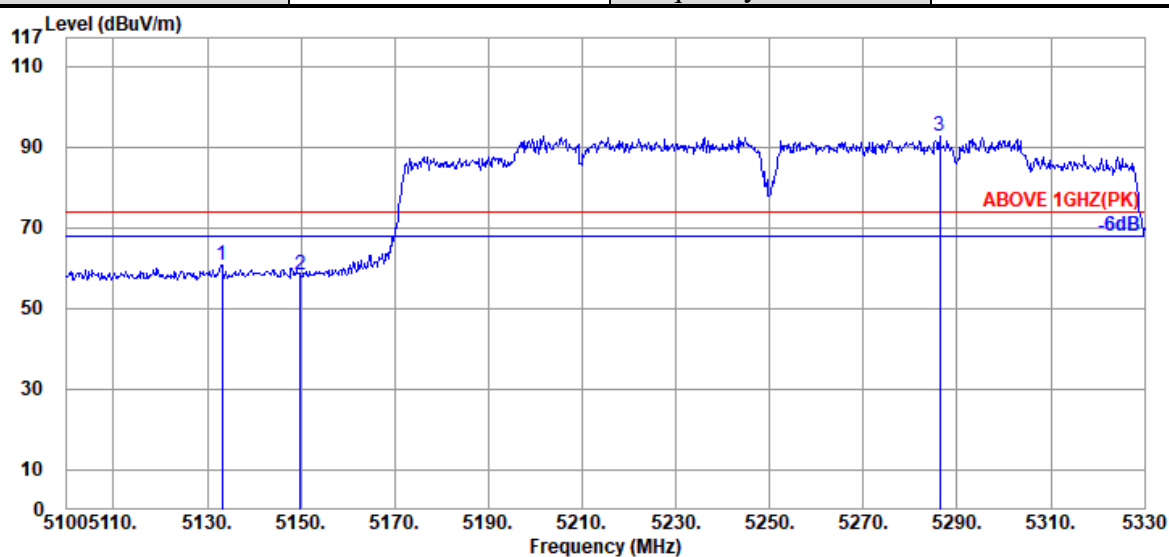

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.120	34.13	8.91	39.29	56.80	60.55	74.00	13.45	Peak
5149.910	34.20	8.92	39.29	54.45	58.28	74.00	15.72	Peak
@ 5286.300	34.47	9.04	39.28	88.41	92.64	---	---	Peak

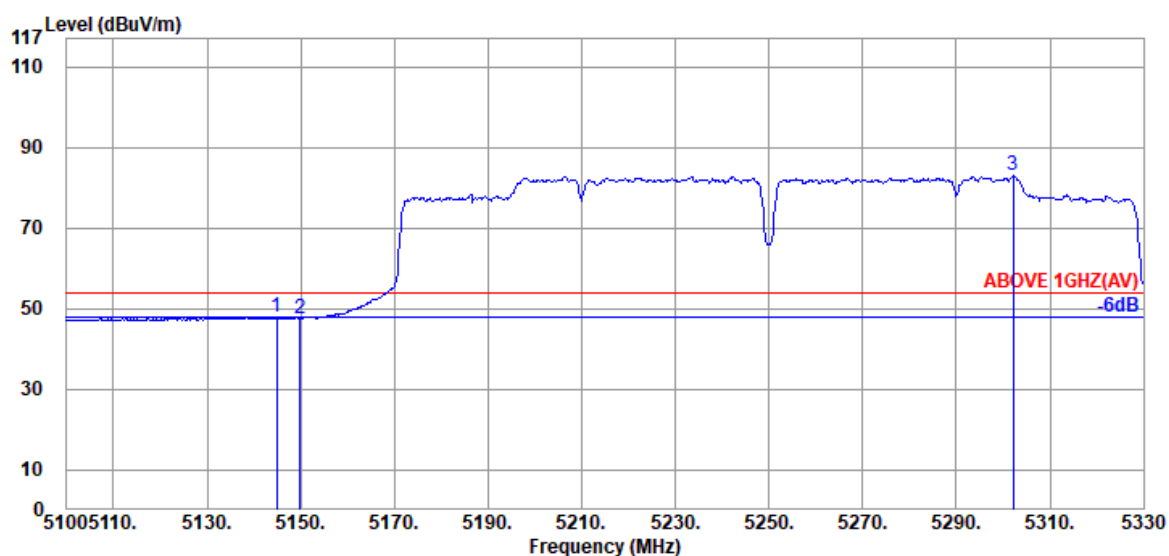


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.850	34.20	8.92	39.29	43.97	47.80	54.00	6.20	Average
5149.910	34.20	8.92	39.29	43.76	47.59	54.00	6.41	Average
@ 5302.170	34.50	9.05	39.28	78.59	82.86	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

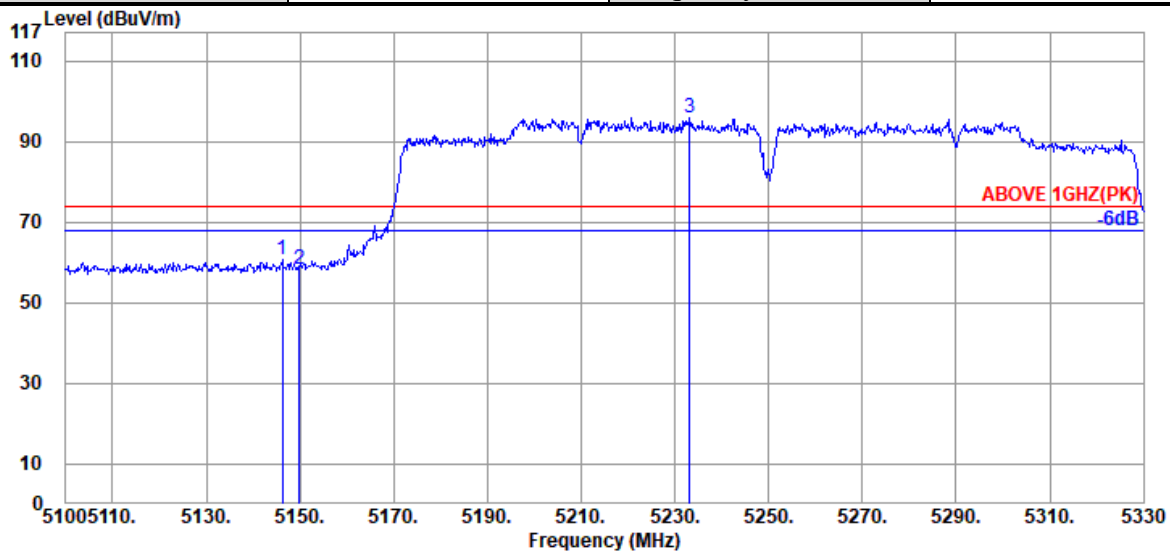

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.230	34.20	8.92	39.29	56.76	60.59	74.00	13.41	Peak
5149.910	34.20	8.92	39.29	54.55	58.38	74.00	15.62	Peak
@ 5233.170	34.40	8.99	39.28	91.79	95.90	---	---	Peak

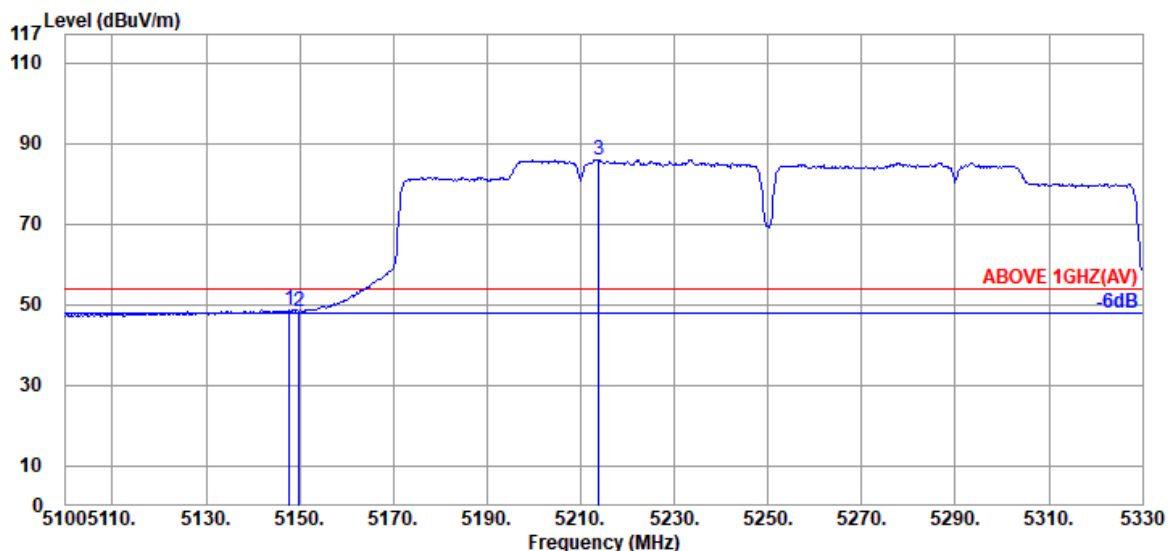

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	34.20	8.92	39.29	44.90	48.73	54.00	5.27	Average
5149.910	34.20	8.92	39.29	44.65	48.48	54.00	5.52	Average
@ 5213.850	34.40	8.98	39.28	81.87	85.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

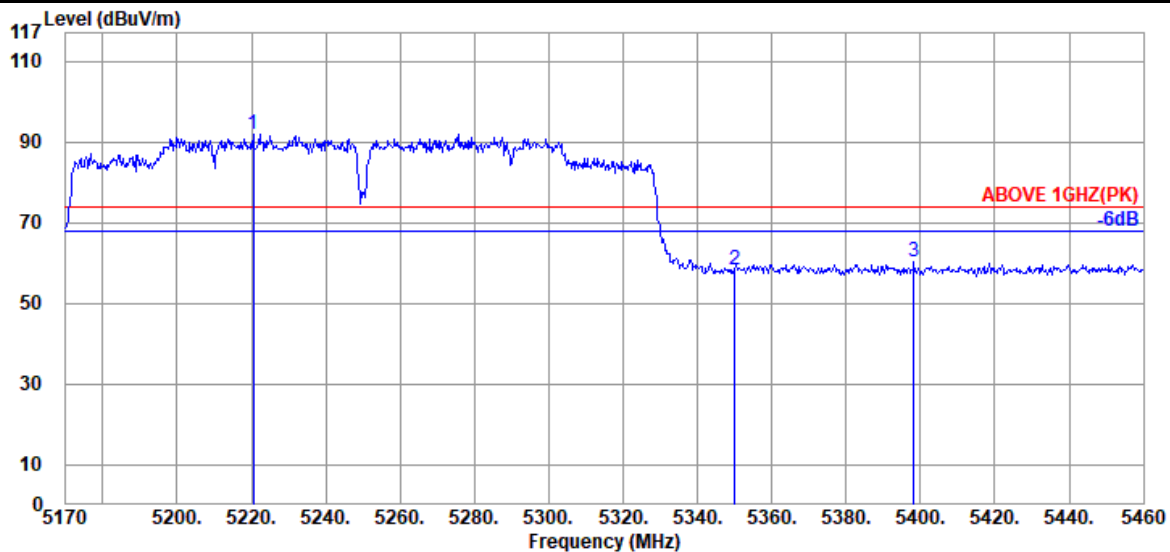

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5220.460	34.40	8.98	39.28	87.79	91.89	---	---	Peak
	5350.090	34.80	9.10	39.27	53.82	58.45	74.00	15.55	Peak
	5398.230	35.00	9.14	39.27	55.48	60.35	74.00	13.65	Peak

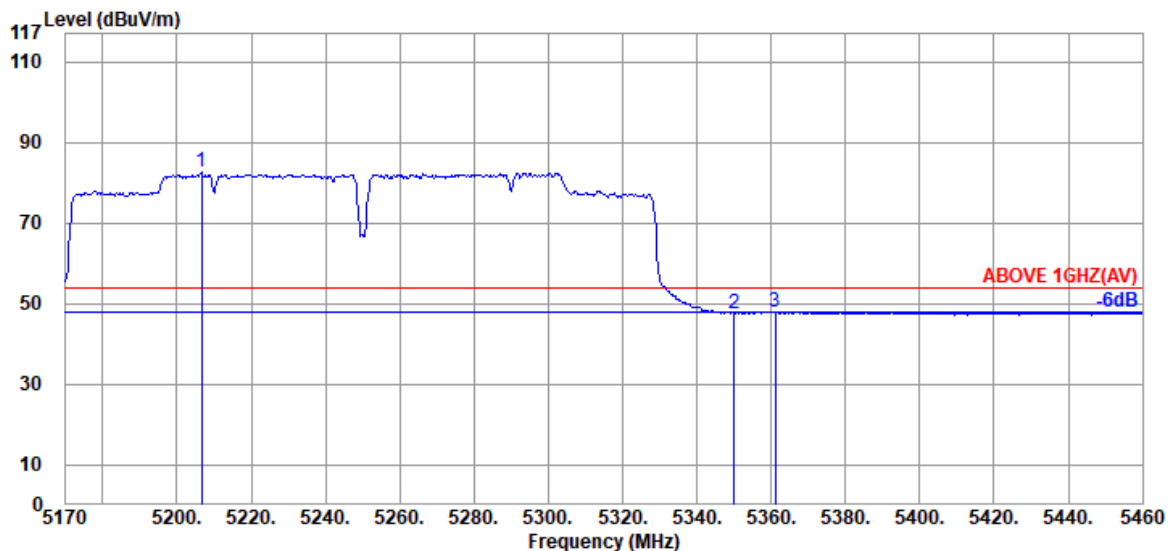


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5206.540	34.40	8.96	39.28	78.46	82.54	---	---	Average
	5350.090	34.80	9.10	39.27	43.08	47.71	54.00	6.29	Average
	5361.110	34.87	9.11	39.27	43.35	48.06	54.00	5.94	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

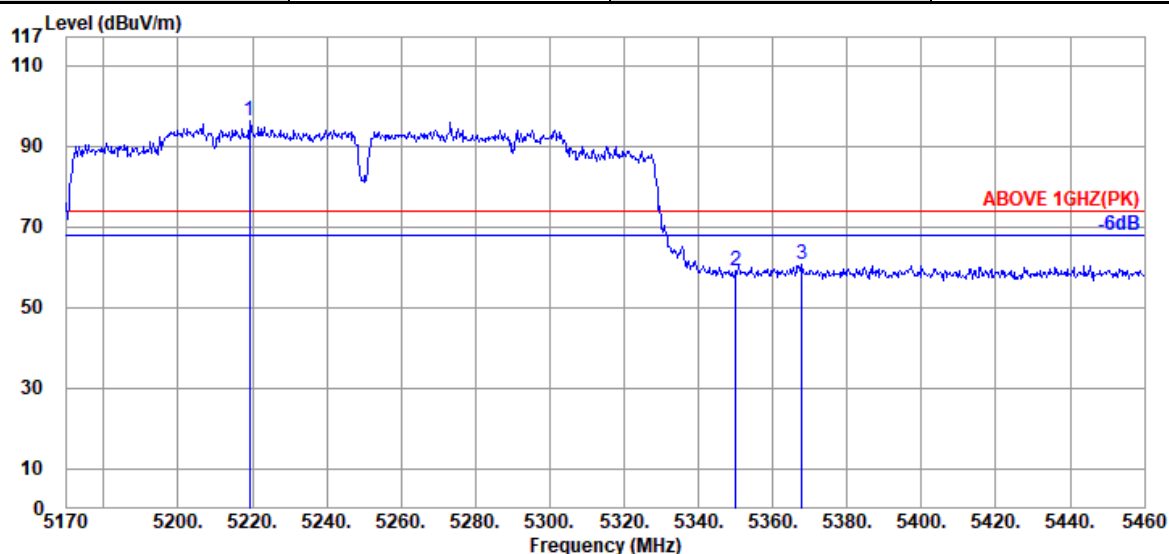

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5219.300	34.40	8.98	39.28	92.27	96.37	---	---	Peak
5350.090	34.80	9.10	39.27	54.51	59.14	74.00	14.86	Peak
5367.780	34.87	9.11	39.27	55.96	60.67	74.00	13.33	Peak

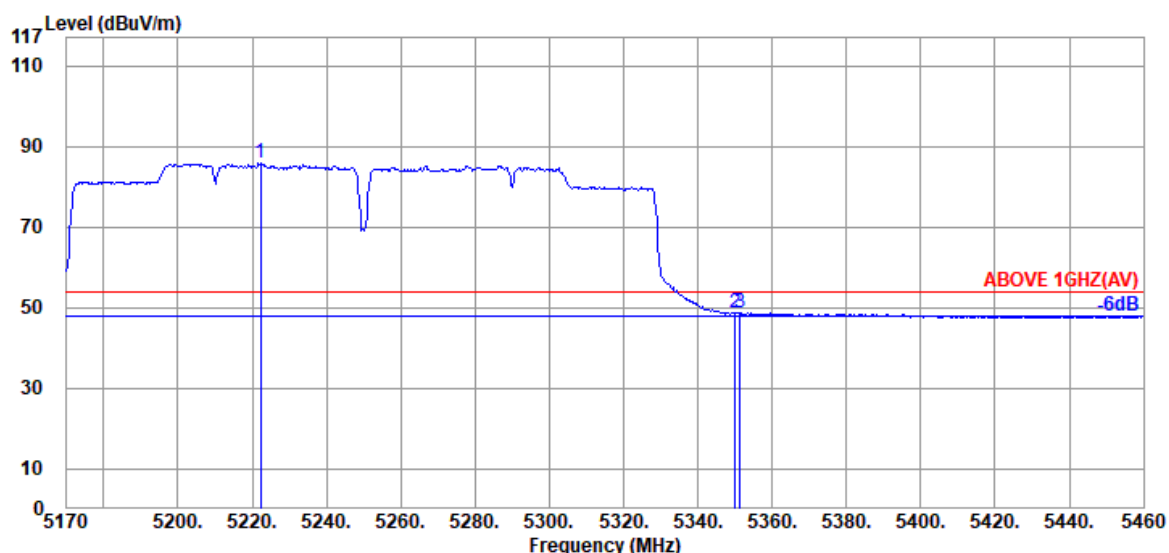

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	34.40	8.98	39.28	81.66	85.76	---	---	Average
5350.090	34.80	9.10	39.27	43.92	48.55	54.00	5.45	Average
5351.250	34.80	9.10	39.27	44.14	48.77	54.00	5.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

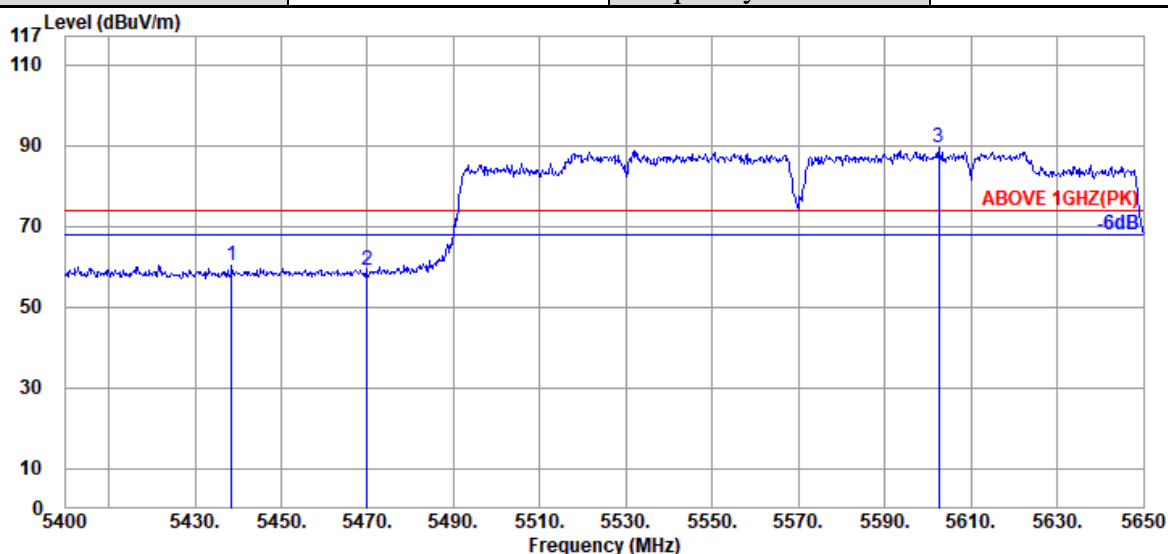

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.500	35.00	9.17	39.26	55.29	60.20	74.00	13.80	Peak
5470.000	34.97	9.20	39.26	54.38	59.29	74.00	14.71	Peak
@ 5602.500	34.70	9.31	39.28	84.71	89.44	---	---	Peak

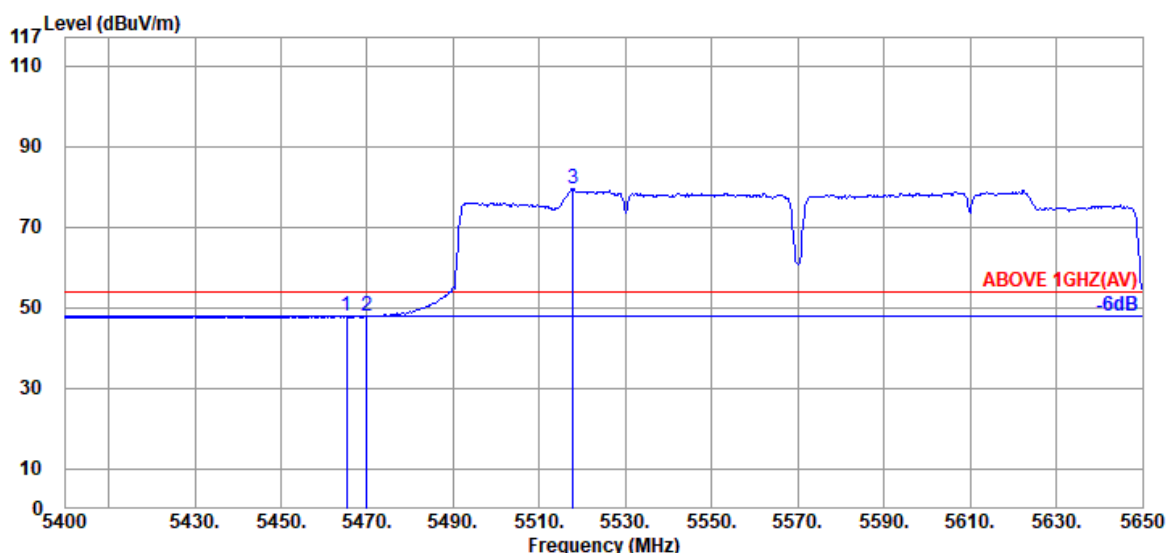


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.250	34.97	9.20	39.26	42.99	47.90	54.00	6.10	Average
5470.000	34.97	9.20	39.26	42.92	47.83	54.00	6.17	Average
@ 5517.750	34.87	9.24	39.26	74.67	79.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

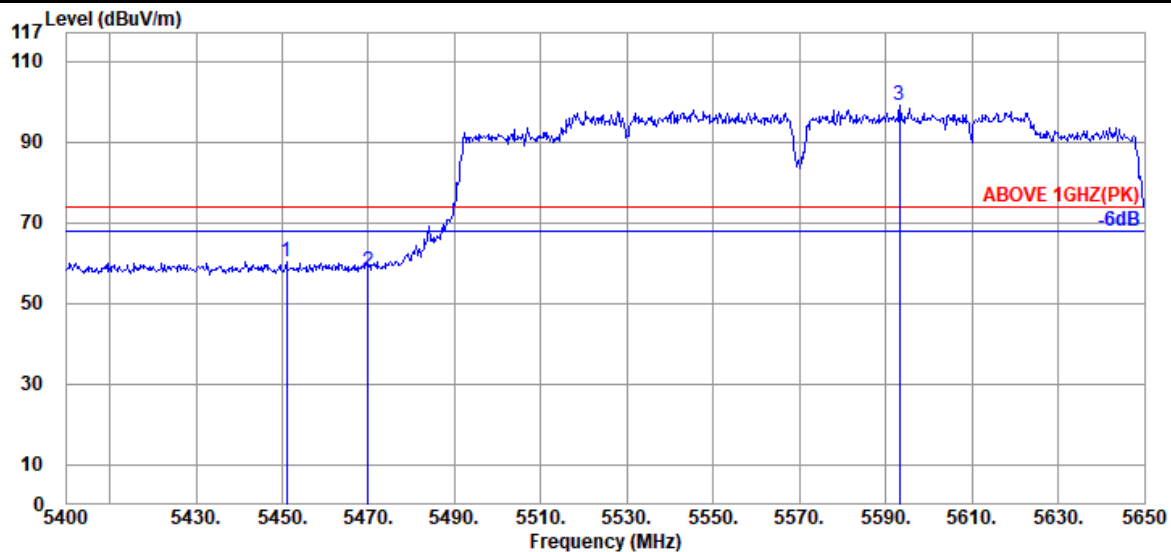

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	35.00	9.18	39.26	55.38	60.30	74.00	13.70	Peak
5470.000	34.97	9.20	39.26	52.87	57.78	74.00	16.22	Peak
@ 5593.250	34.70	9.30	39.28	94.18	98.90	---	---	Peak

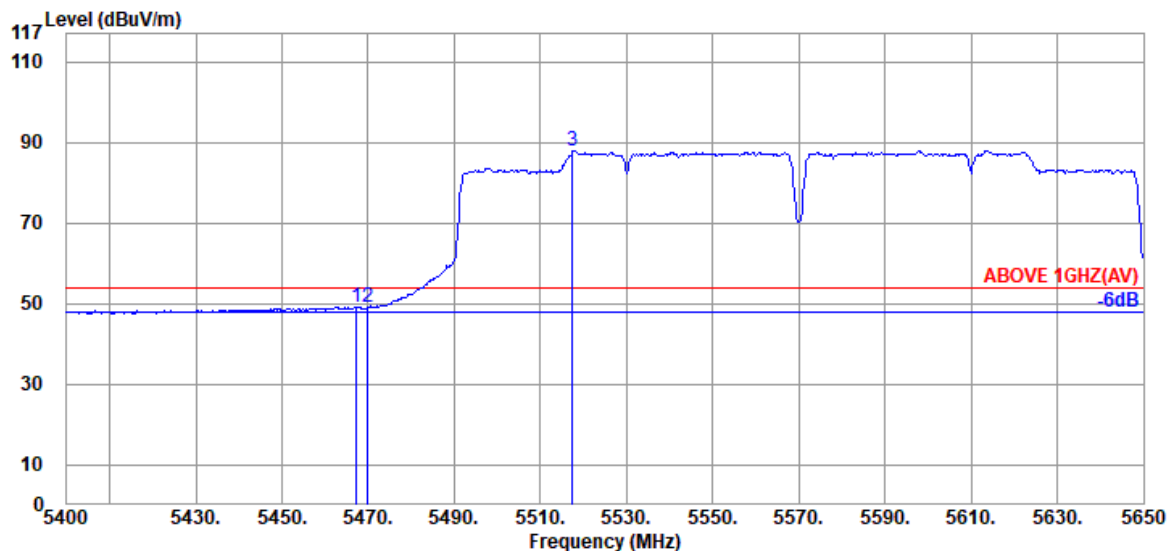

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.97	9.20	39.26	44.38	49.29	54.00	4.71	Average
5470.000	34.97	9.20	39.26	44.05	48.96	54.00	5.04	Average
@ 5517.500	34.87	9.24	39.26	83.15	88.00	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

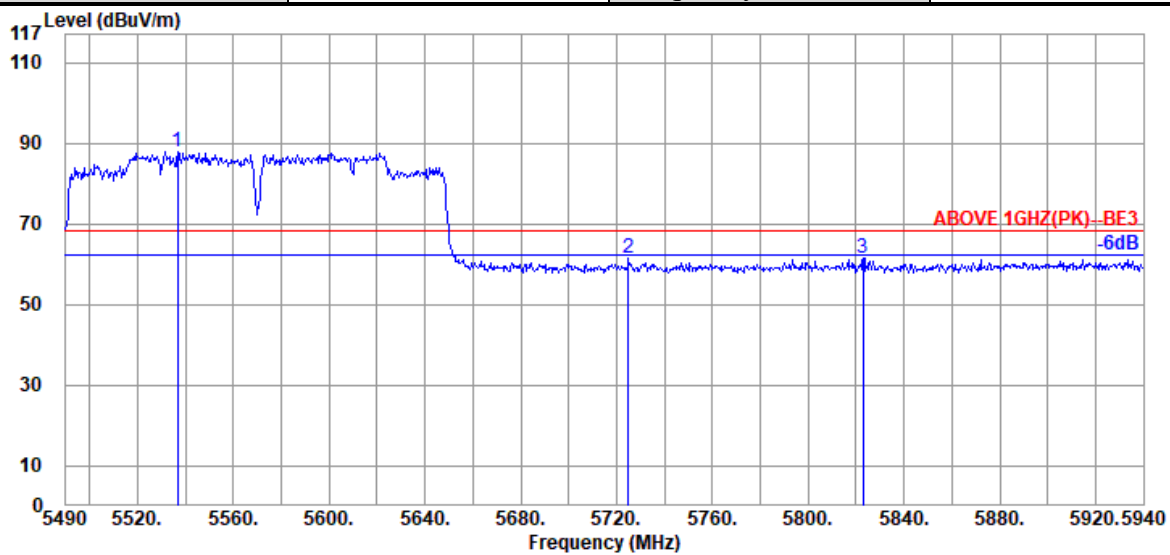

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5536.800	34.83	9.26	39.27	83.11	87.93	---	---	Peak
	5724.900	34.57	9.42	39.30	56.83	61.52	68.20	6.68	Peak
	5823.000	34.60	9.50	39.32	56.63	61.41	68.20	6.79	Peak

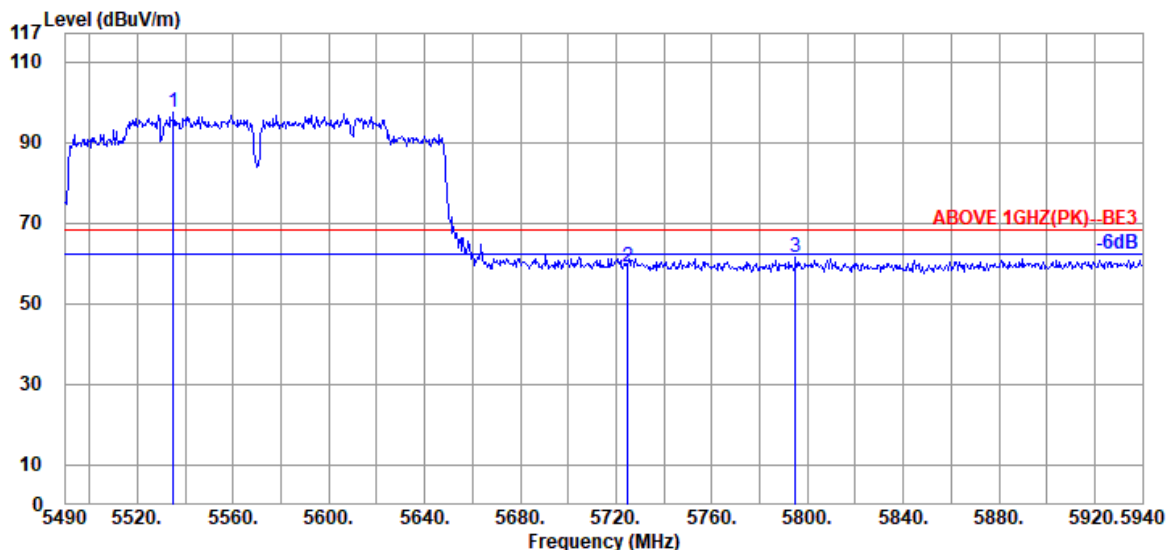

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5535.000	34.83	9.26	39.27	92.53	97.35	---	---	Peak
	5724.900	34.57	9.42	39.30	54.49	59.18	68.20	9.02	Peak
	5795.100	34.60	9.48	39.31	56.89	61.66	68.20	6.54	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

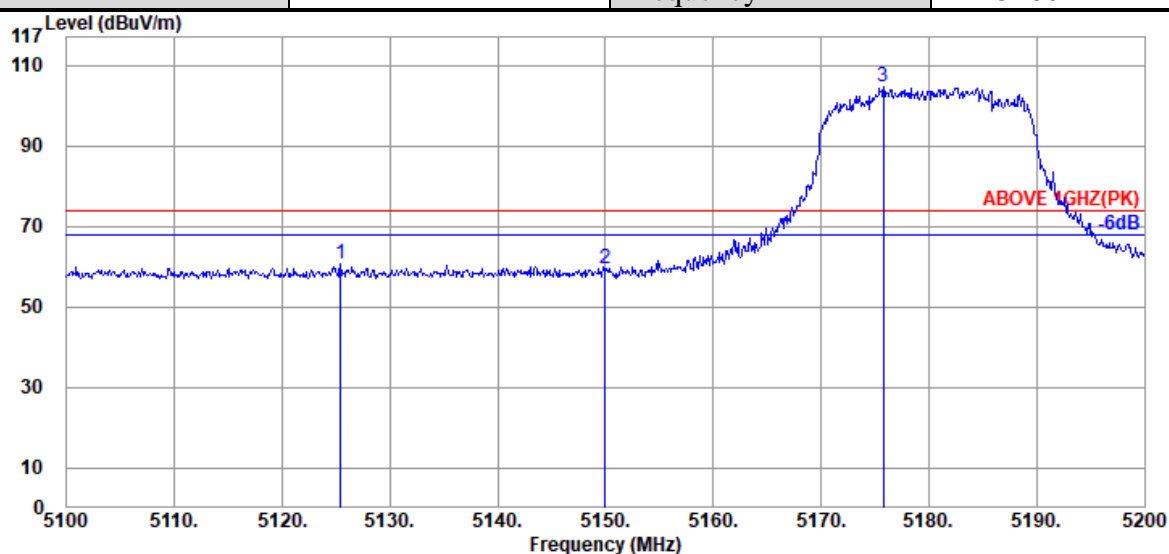

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.400	34.07	8.91	39.29	56.83	60.52	74.00	13.48	Peak
5150.000	34.20	8.92	39.29	55.55	59.38	74.00	14.62	Peak
@ 5175.800	34.33	8.95	39.28	100.65	104.65	---	---	Peak

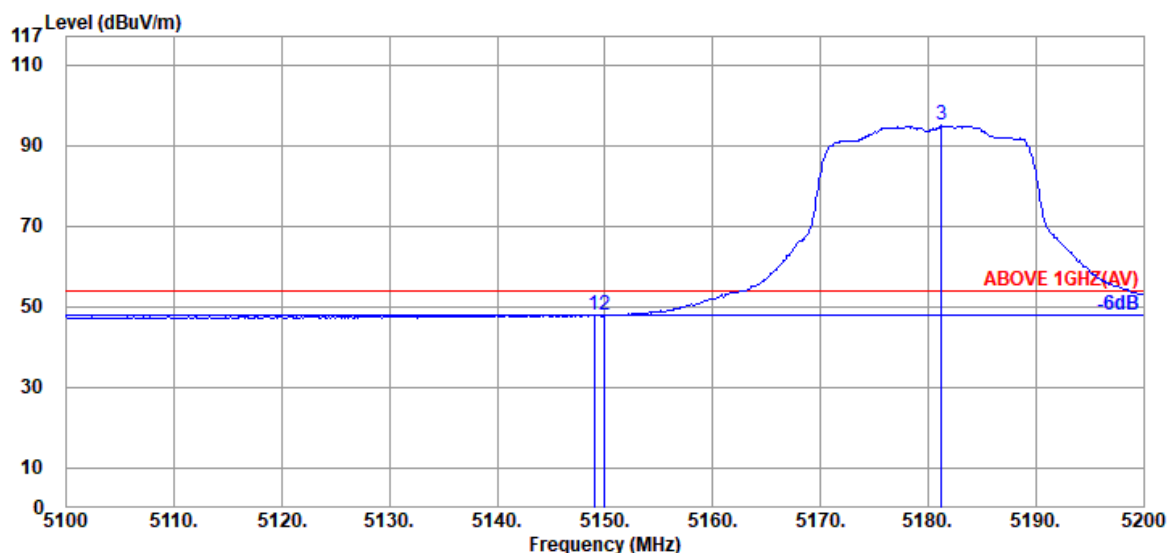


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	39.29	44.12	47.95	54.00	6.05	Average
5150.000	34.20	8.92	39.29	44.13	47.96	54.00	6.04	Average
@ 5181.200	34.33	8.95	39.28	90.88	94.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

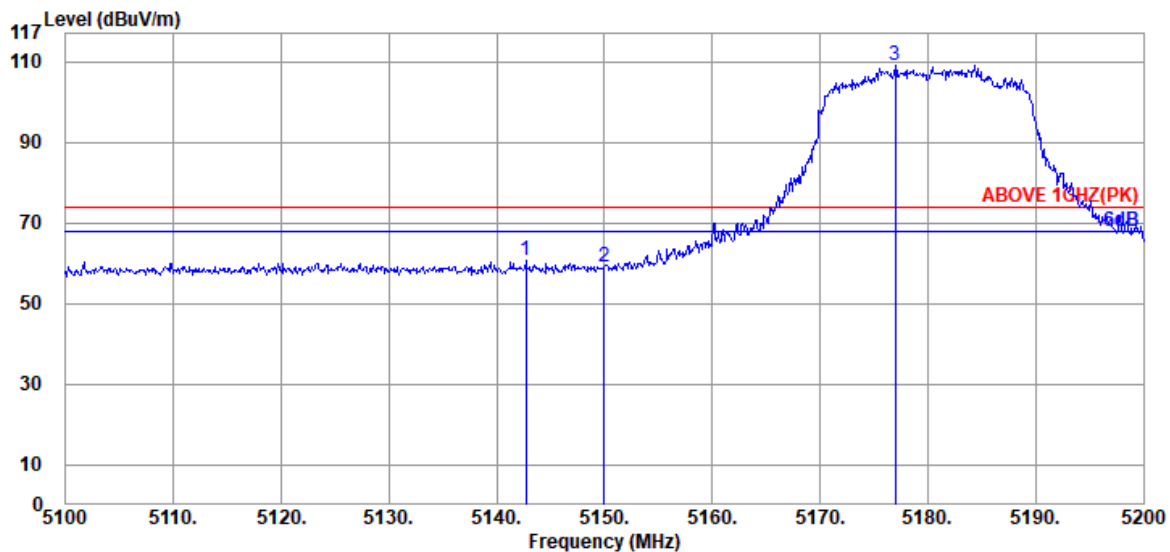

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	34.20	8.92	39.29	57.04	60.87	74.00	13.13	Peak
5150.000	34.20	8.92	39.29	55.32	59.15	74.00	14.85	Peak
@ 5177.000	34.33	8.95	39.28	104.89	108.89	---	---	Peak

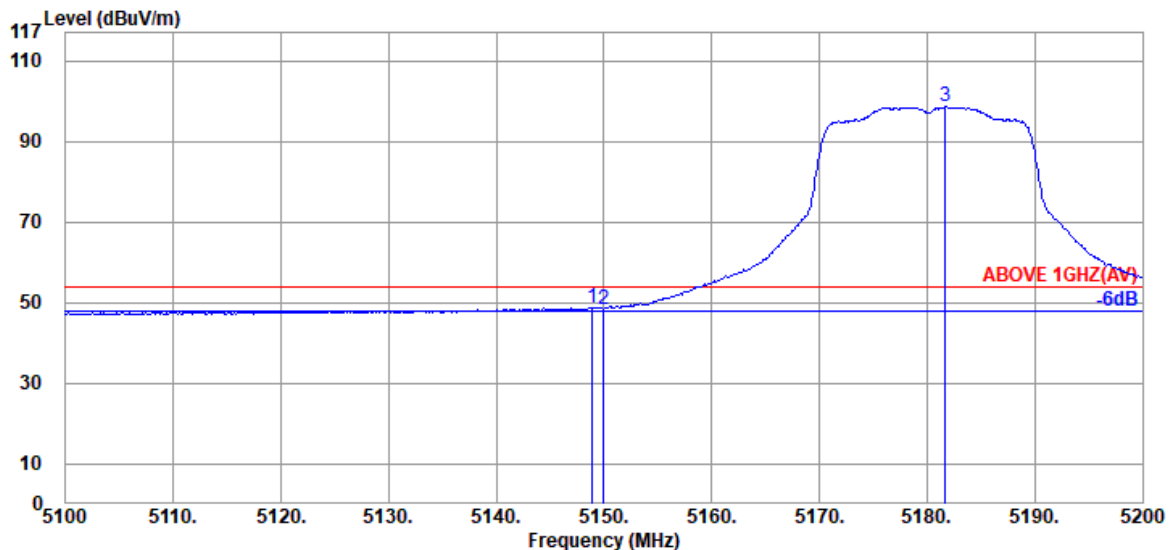

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.20	8.92	39.29	44.83	48.66	54.00	5.34	Average
5150.000	34.20	8.92	39.29	44.54	48.37	54.00	5.63	Average
@ 5181.700	34.33	8.95	39.28	94.60	98.60	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

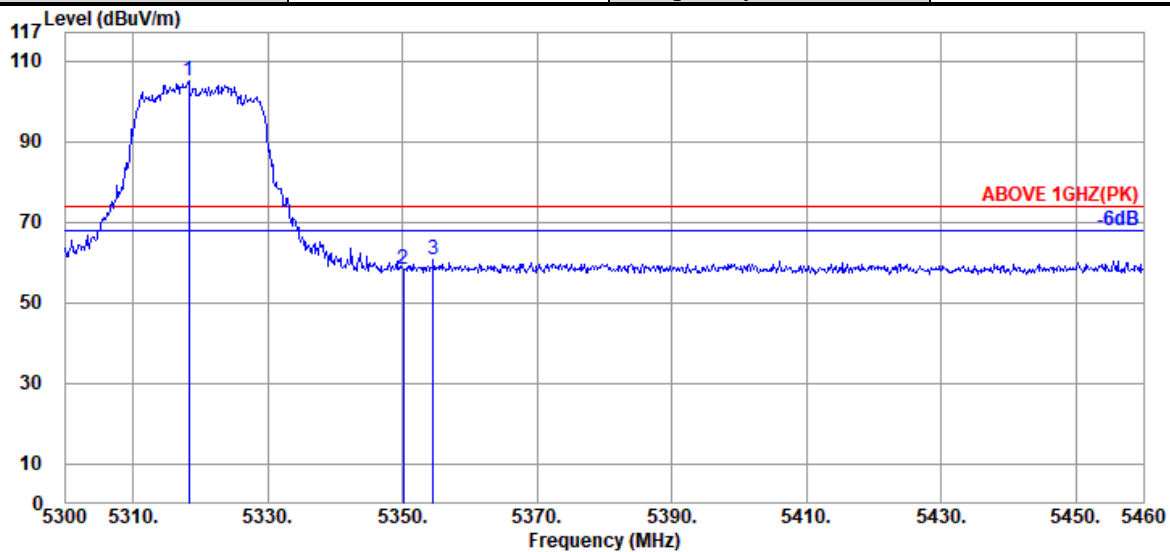

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.60	9.07	39.27	100.79	105.19	---	---	Peak
5350.080	34.80	9.10	39.27	53.54	58.17	74.00	15.83	Peak
5354.560	34.87	9.10	39.27	55.96	60.66	74.00	13.34	Peak

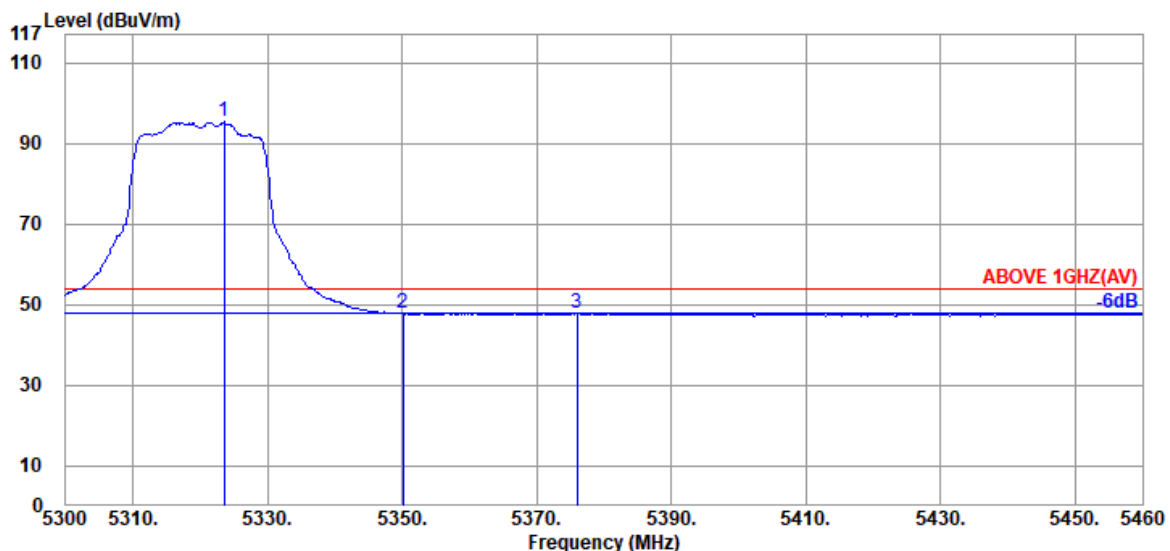


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	34.70	9.07	39.27	90.74	95.24	---	---	Average
5350.080	34.80	9.10	39.27	43.24	47.87	54.00	6.13	Average
5376.000	34.93	9.11	39.27	43.18	47.95	54.00	6.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

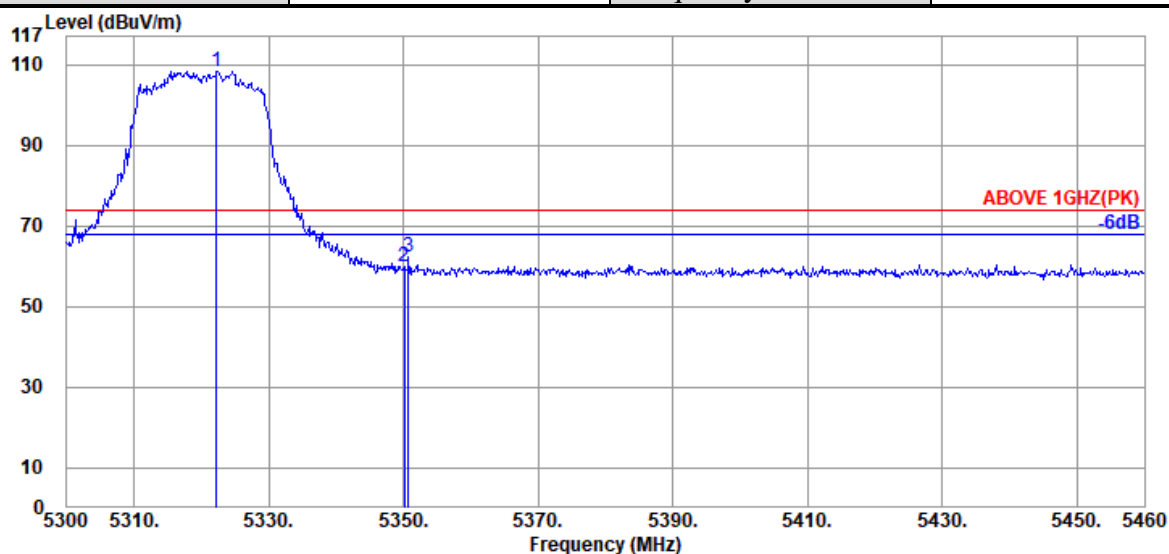

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5322.240	34.60	9.07	39.27	103.96	108.36	---	---	Peak
5350.080	34.80	9.10	39.27	55.13	59.76	74.00	14.24	Peak
5350.720	34.80	9.10	39.27	57.60	62.23	74.00	11.77	Peak

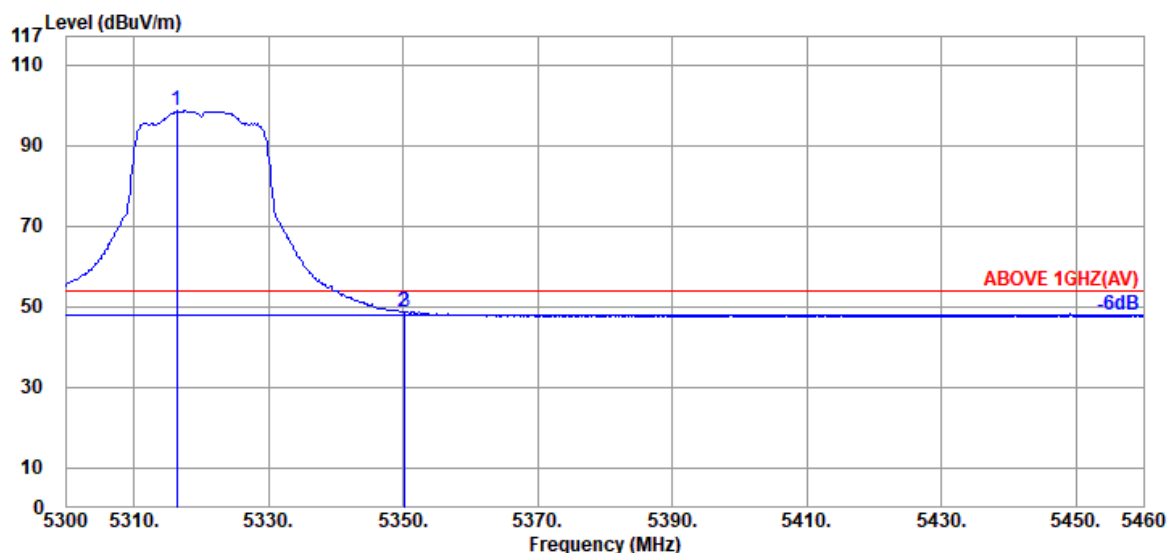

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.320	34.60	9.07	39.27	94.04	98.44	---	---	Average
5350.080	34.80	9.10	39.27	44.26	48.89	54.00	5.11	Average
5350.240	34.80	9.10	39.27	44.22	48.85	54.00	5.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

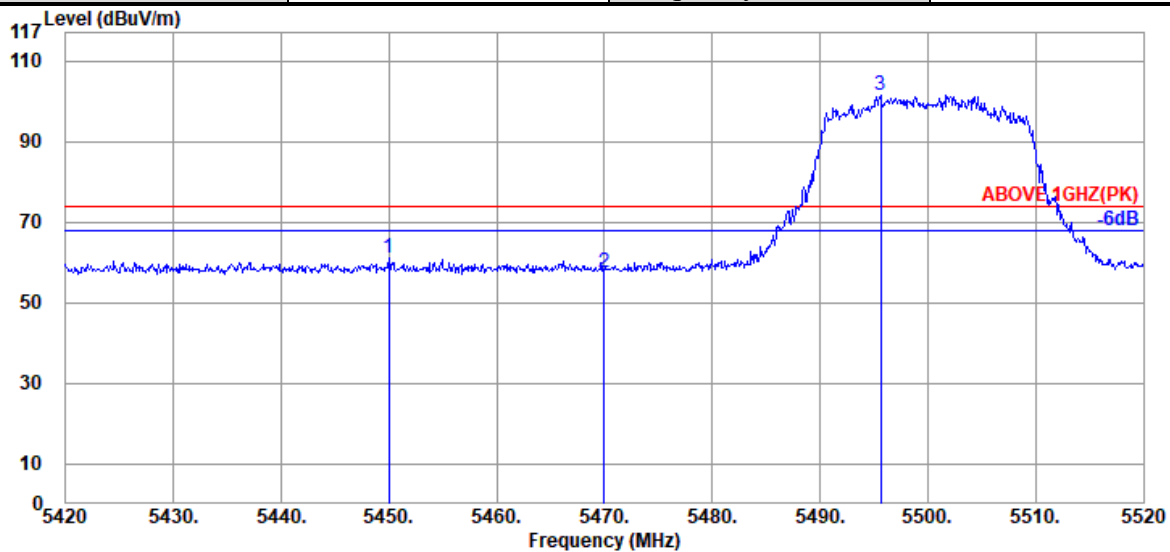

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.000	35.00	9.18	39.26	56.06	60.98	74.00	13.02	Peak
5470.000	34.97	9.20	39.26	52.73	57.64	74.00	16.36	Peak
@ 5495.600	34.90	9.21	39.26	96.75	101.60	---	---	Peak

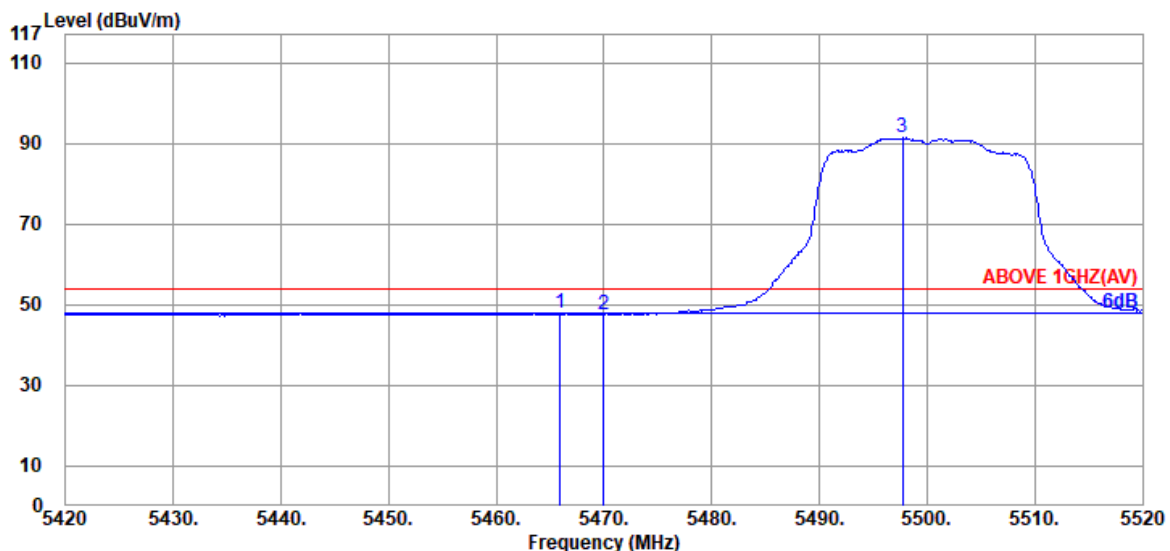


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.900	34.97	9.20	39.26	42.90	47.81	54.00	6.19	Average
5470.000	34.97	9.20	39.26	42.68	47.59	54.00	6.41	Average
@ 5497.700	34.90	9.23	39.26	86.46	91.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

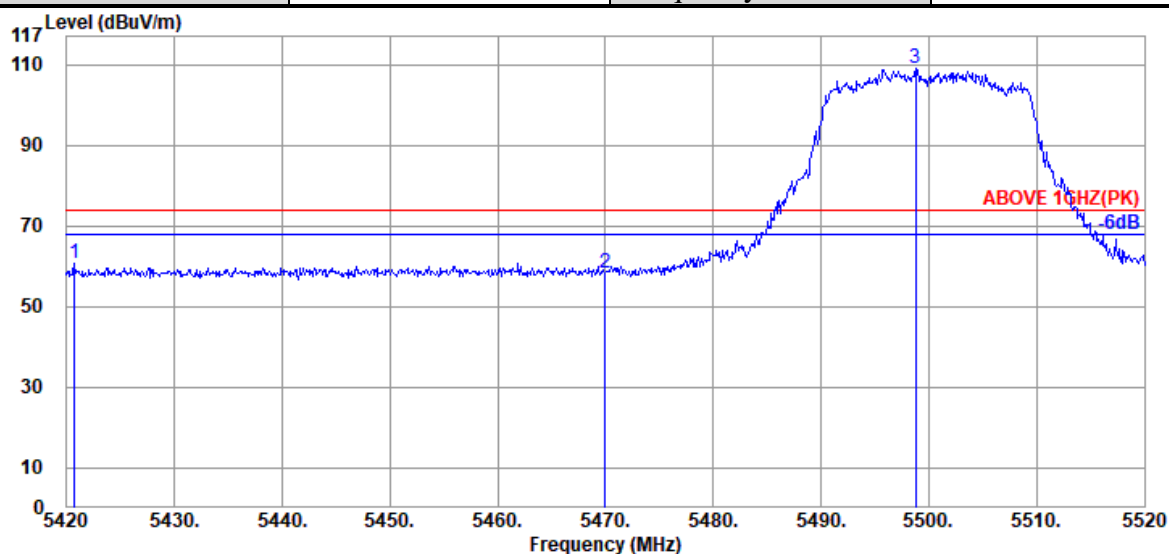

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5420.700	35.00	9.15	39.27	55.84	60.72	74.00	13.28	Peak
5470.000	34.97	9.20	39.26	53.40	58.31	74.00	15.69	Peak
@ 5498.800	34.90	9.23	39.26	104.31	109.18	---	---	Peak

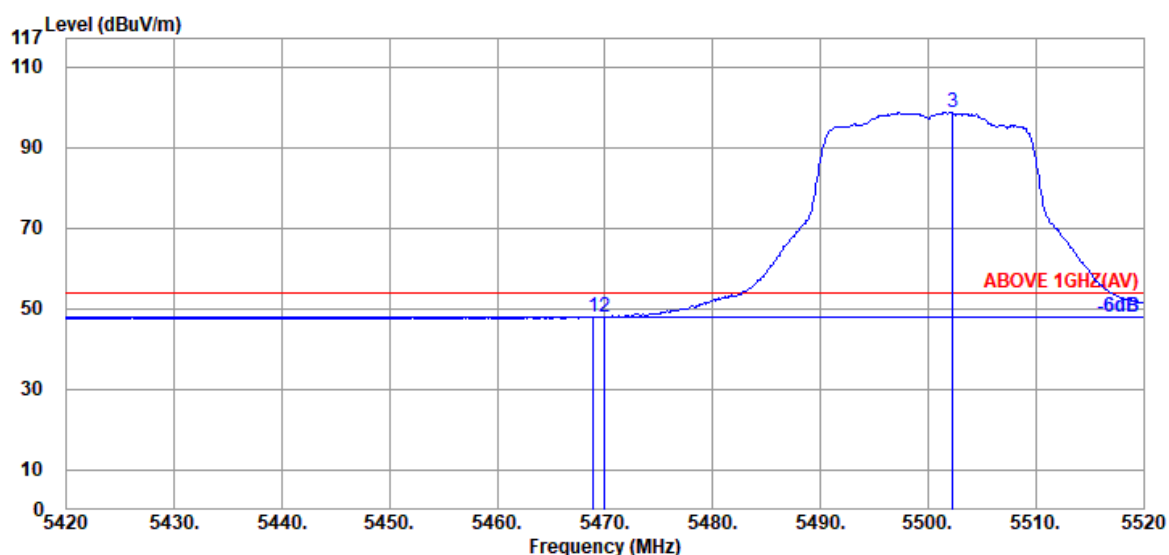

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	43.12	48.03	54.00	5.97	Average
5470.000	34.97	9.20	39.26	43.04	47.95	54.00	6.05	Average
@ 5502.300	34.90	9.23	39.26	93.82	98.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

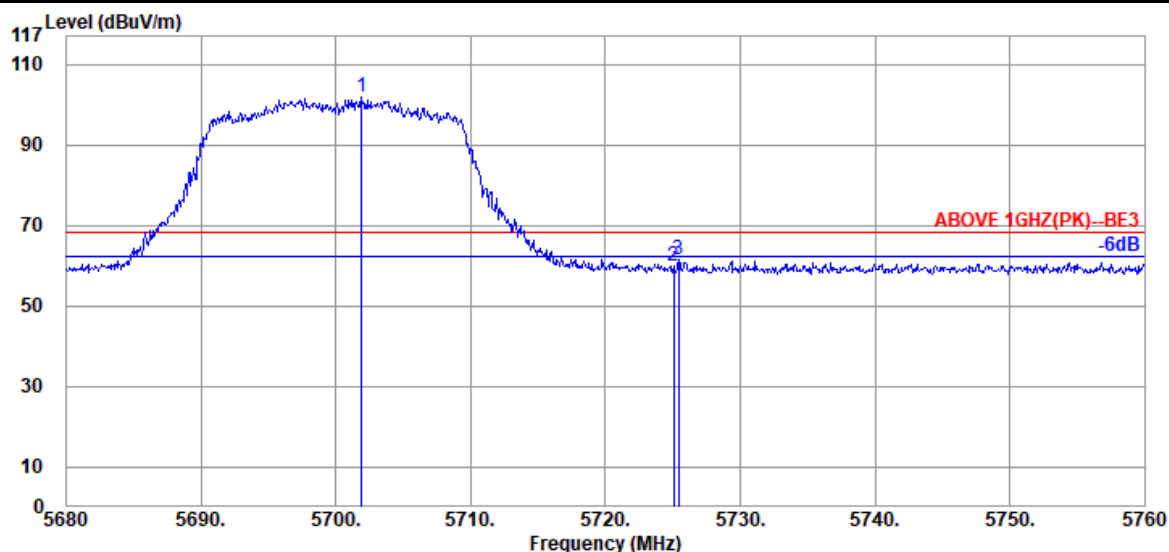

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.920	34.50	9.40	39.30	97.29	101.89	---	---	Peak
5725.040	34.57	9.42	39.30	55.34	60.03	68.20	8.17	Peak
5725.440	34.57	9.42	39.30	56.64	61.33	68.20	6.87	Peak

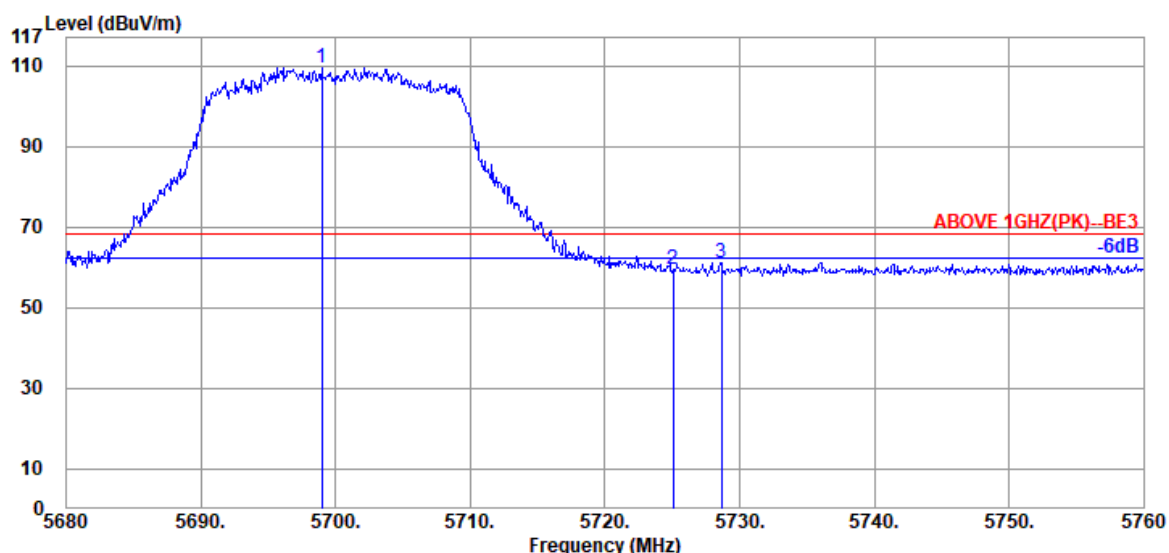

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.960	34.50	9.39	39.30	104.92	109.51	---	---	Peak
5725.040	34.57	9.42	39.30	54.82	59.51	68.20	8.69	Peak
5728.640	34.57	9.42	39.30	56.41	61.10	68.20	7.10	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

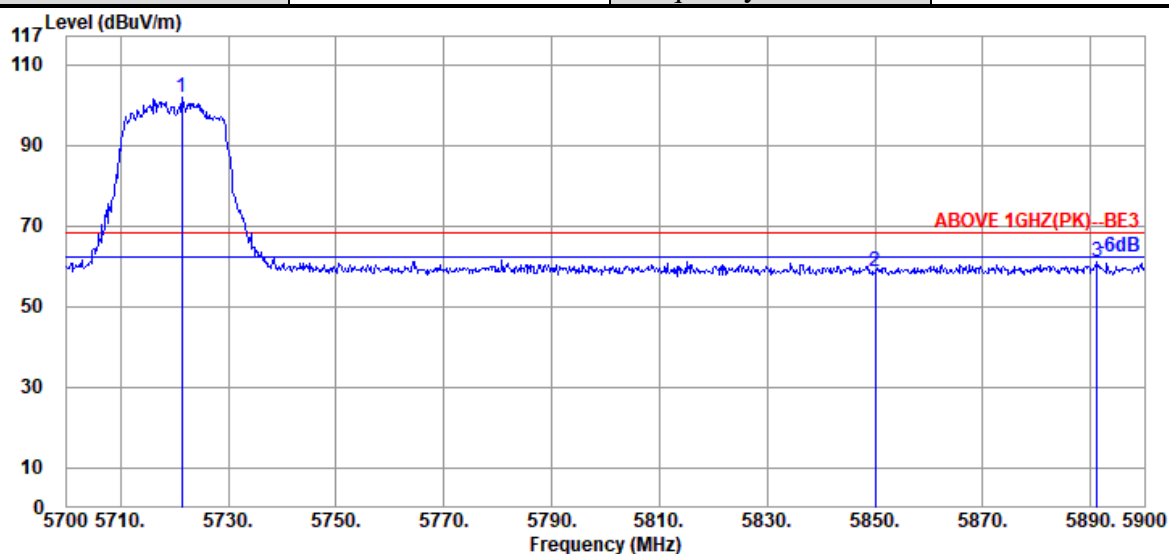

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.400	34.53	9.42	39.30	97.06	101.71	---	---	Peak
	5850.000	34.60	9.52	39.32	53.87	58.67	68.20	9.53	Peak
	5891.200	34.60	9.56	39.33	56.40	61.23	68.20	6.97	Peak

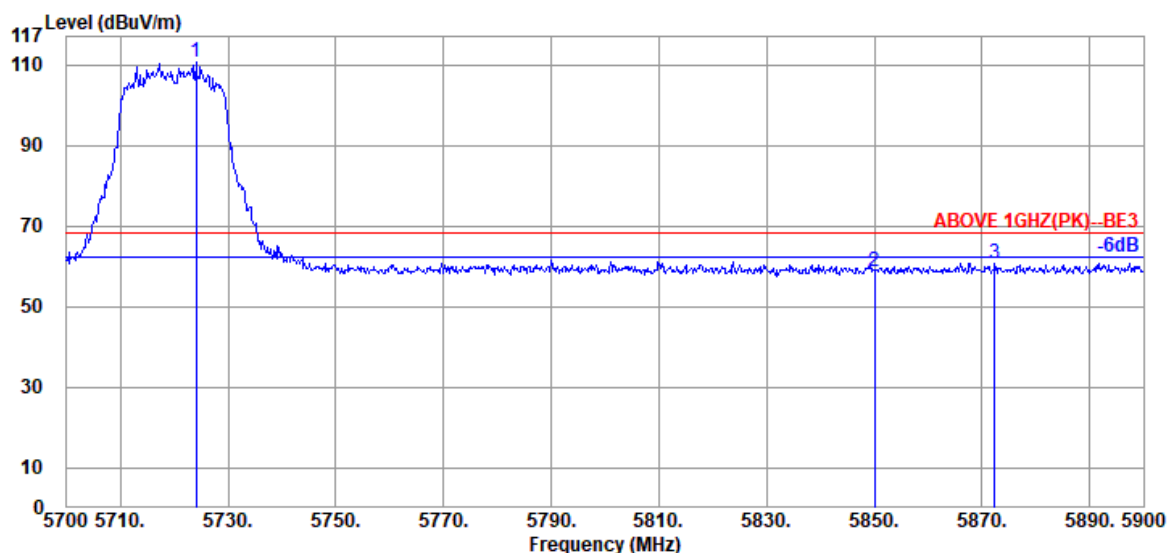

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5724.000	34.57	9.42	39.30	106.07	110.76	---	---	Peak
	5850.000	34.60	9.52	39.32	54.02	58.82	68.20	9.38	Peak
	5872.400	34.60	9.55	39.33	55.96	60.78	68.20	7.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

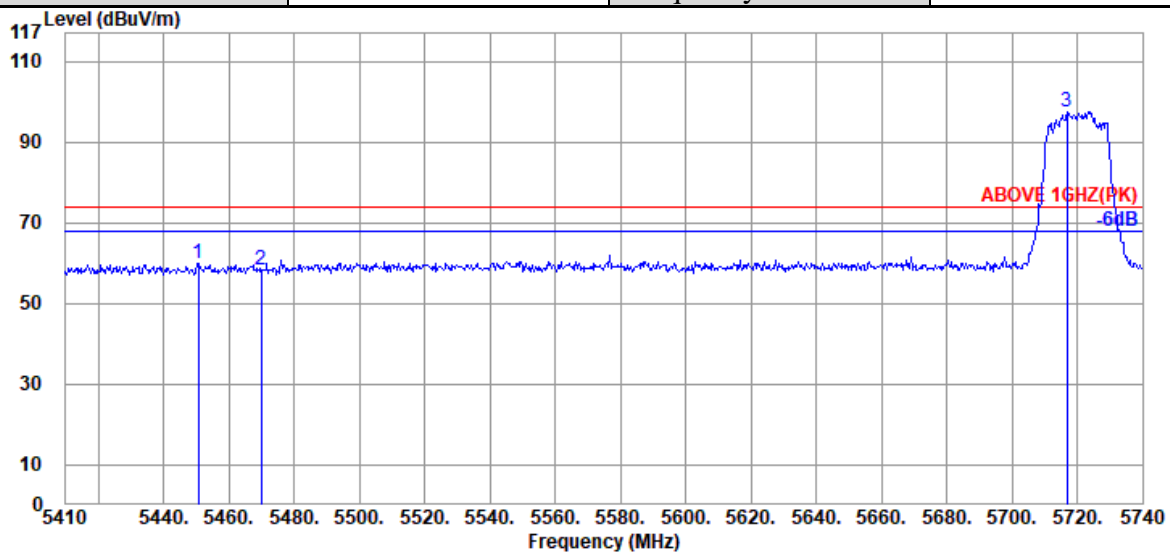

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	35.00	9.05	34.22	50.12	59.95	74.00	14.05	Peak
5470.060	34.97	9.06	34.21	48.33	58.15	74.00	15.85	Peak
@ 5716.900	34.53	9.19	34.30	88.19	97.61	---	---	Peak

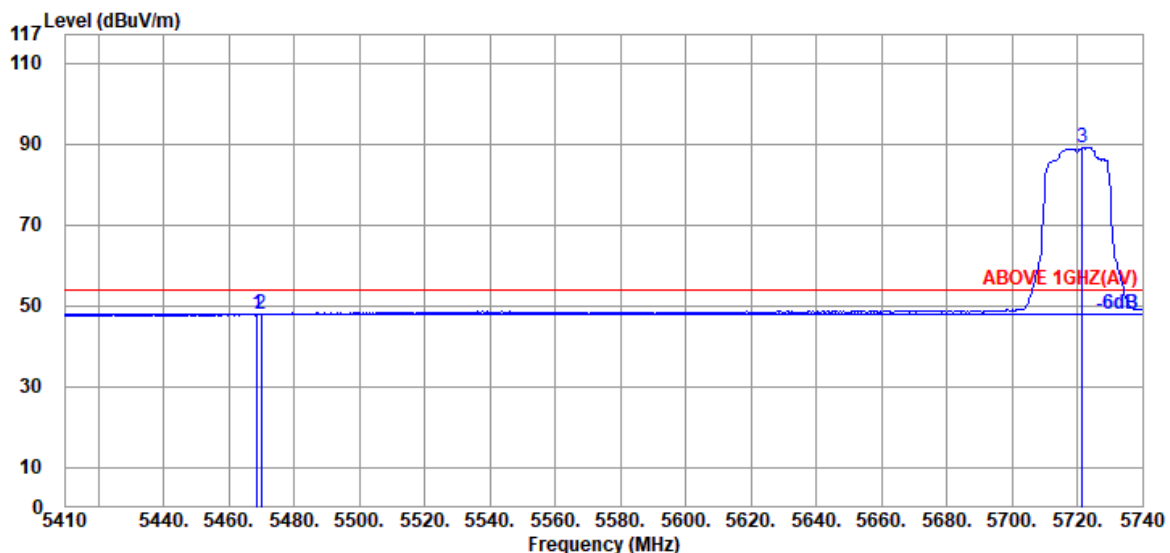

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.97	9.06	34.21	38.23	48.05	54.00	5.95	Average
5470.060	34.97	9.06	34.21	37.99	47.81	54.00	6.19	Average
@ 5721.520	34.53	9.19	34.30	79.74	89.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

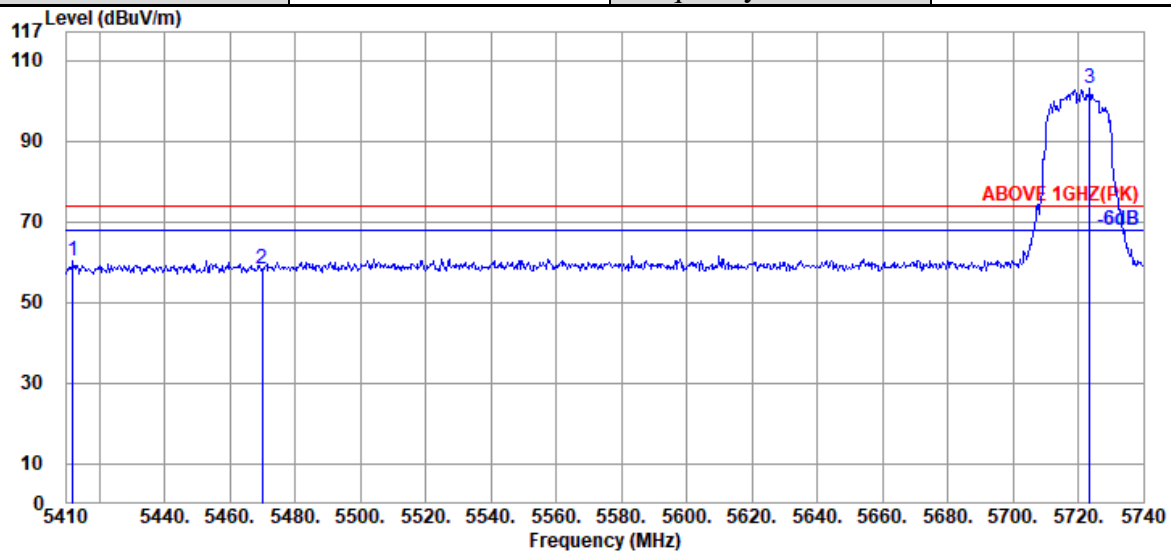

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5411.980	35.00	9.03	34.23	50.57	60.37	74.00	13.63	Peak
5470.060	34.97	9.06	34.21	48.65	58.47	74.00	15.53	Peak
@ 5723.500	34.57	9.20	34.30	93.41	102.88	---	---	Peak

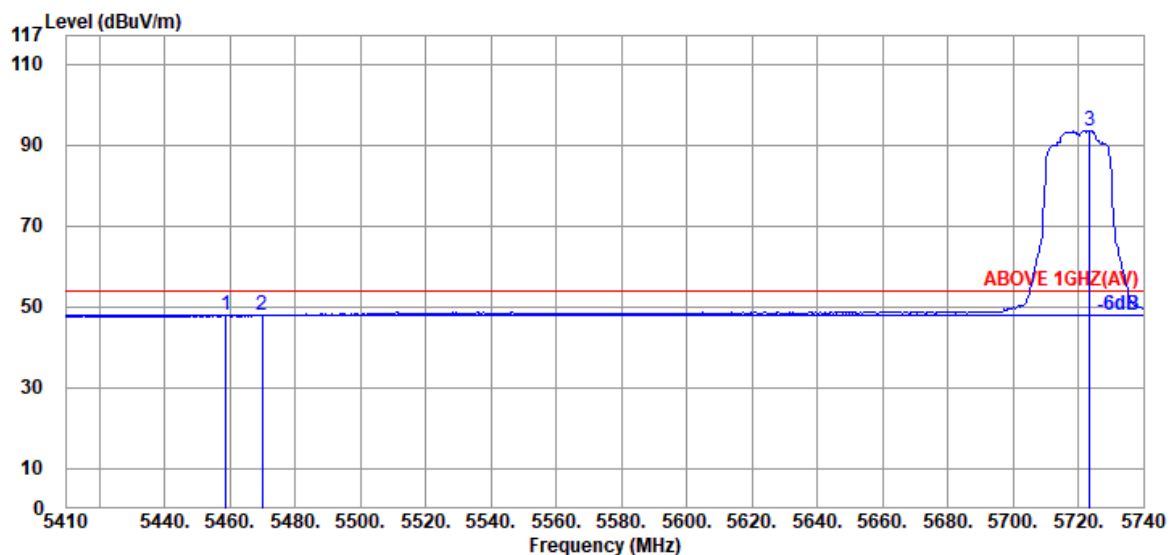

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.840	35.00	9.05	34.21	38.16	48.00	54.00	6.00	Average
5470.060	34.97	9.06	34.21	38.01	47.83	54.00	6.17	Average
@ 5723.500	34.57	9.20	34.30	83.99	93.46	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

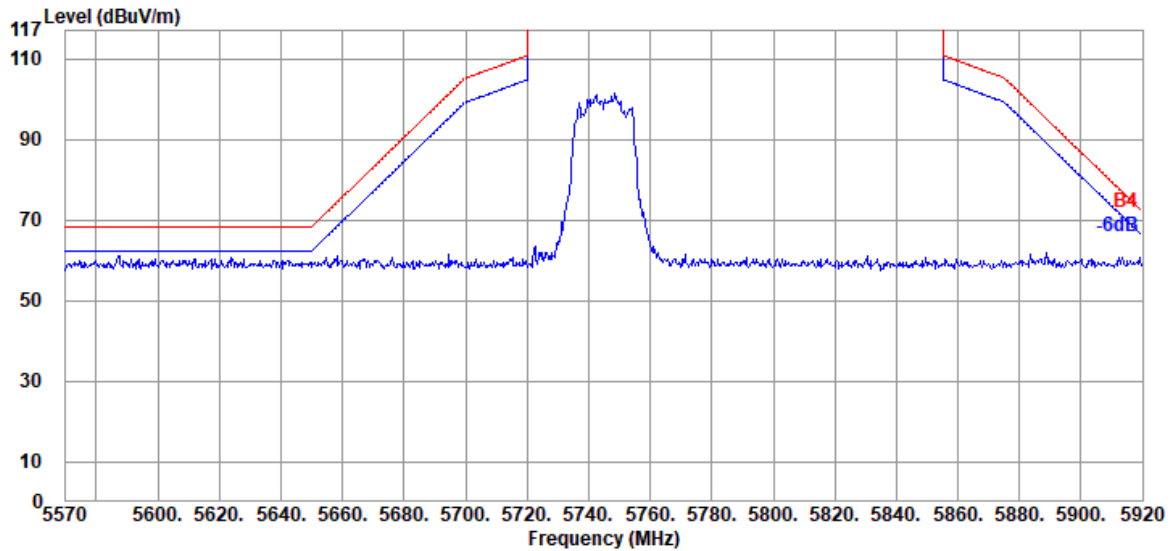

Antenna at Vertical Polarization

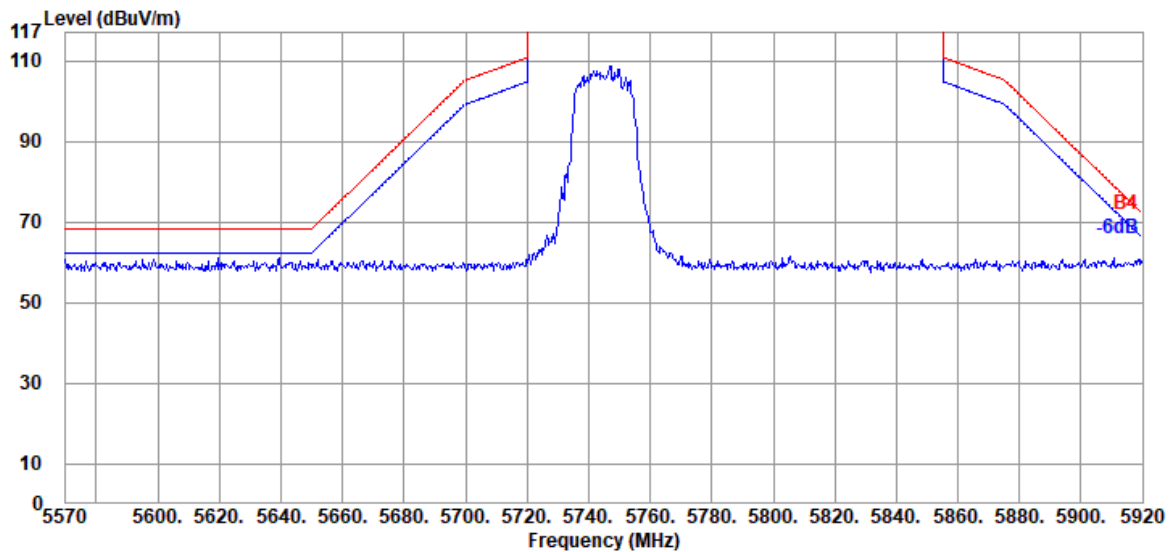


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

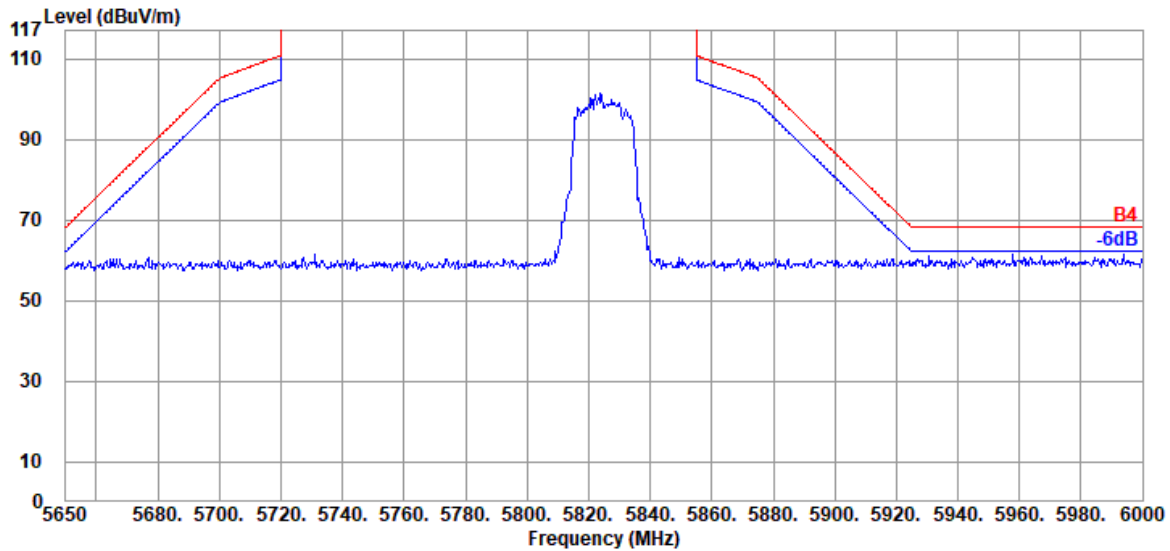


Antenna at Vertical Polarization

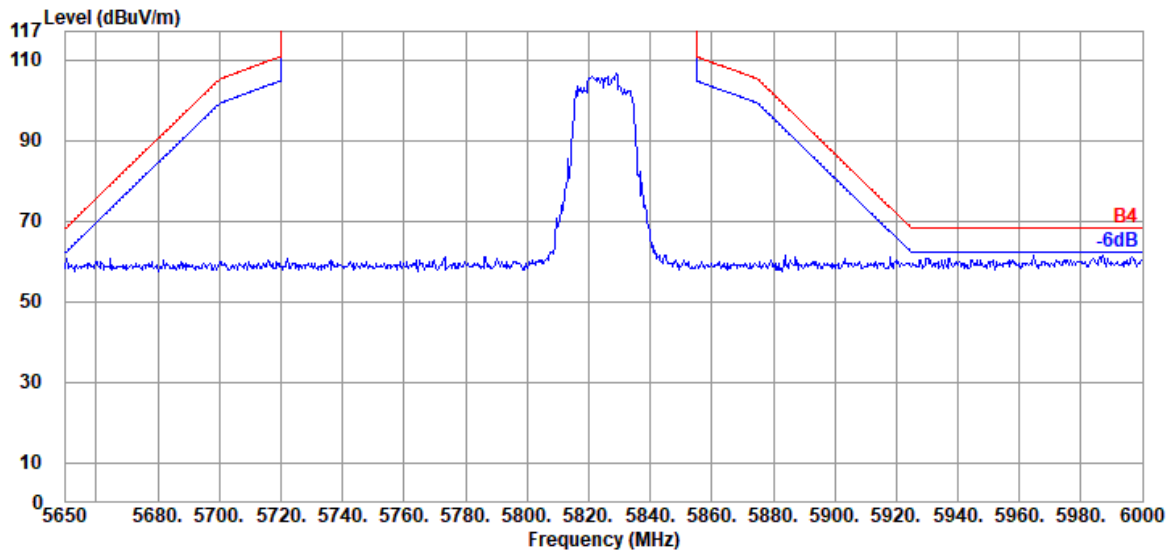

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

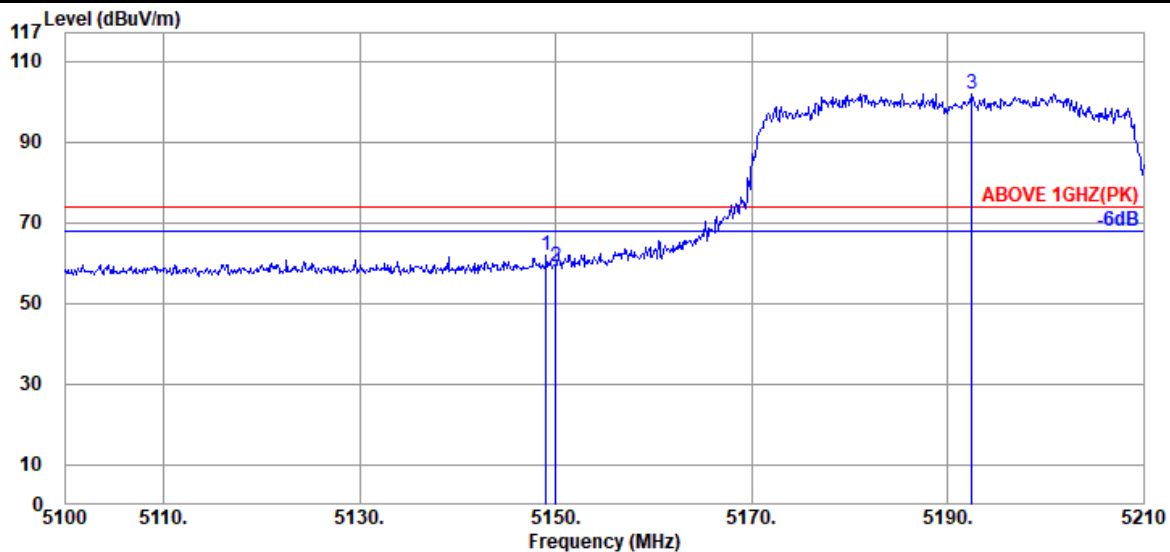

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	39.29	58.03	61.86	74.00	12.14	Peak
5150.050	34.20	8.92	39.29	55.10	58.93	74.00	15.07	Peak
@ 5192.510	34.40	8.96	39.28	97.94	102.02	---	---	Peak

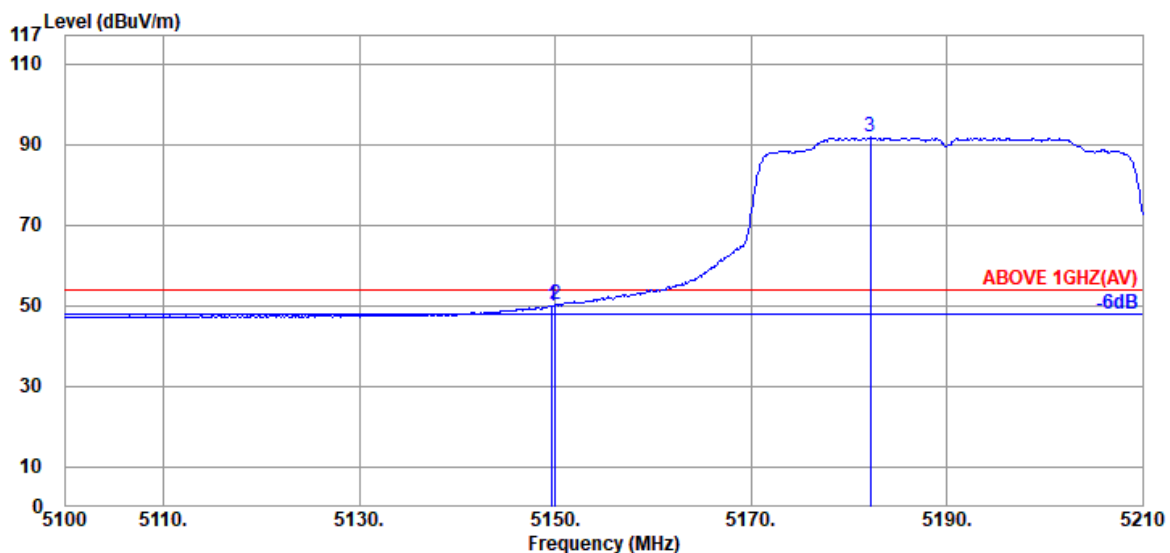


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.92	39.29	46.24	50.07	54.00	3.93	Average
5150.050	34.20	8.92	39.29	46.33	50.16	54.00	3.84	Average
@ 5182.170	34.33	8.95	39.28	87.67	91.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

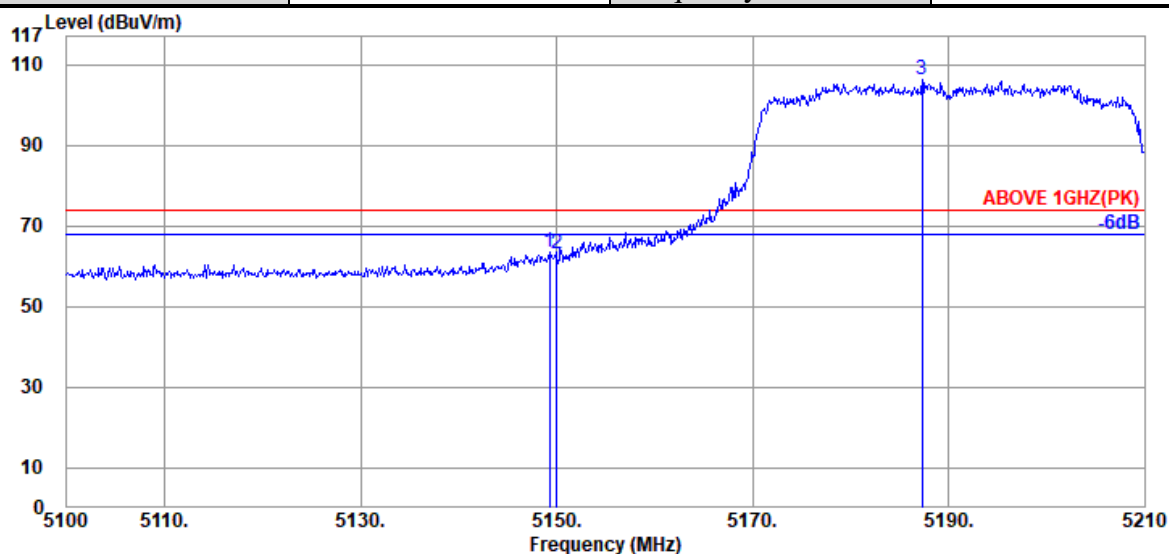

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	8.92	39.29	59.76	63.59	74.00	10.41	Peak
5150.050	34.20	8.92	39.29	59.14	62.97	74.00	11.03	Peak
@ 5187.340	34.40	8.95	39.28	101.96	106.03	---	---	Peak

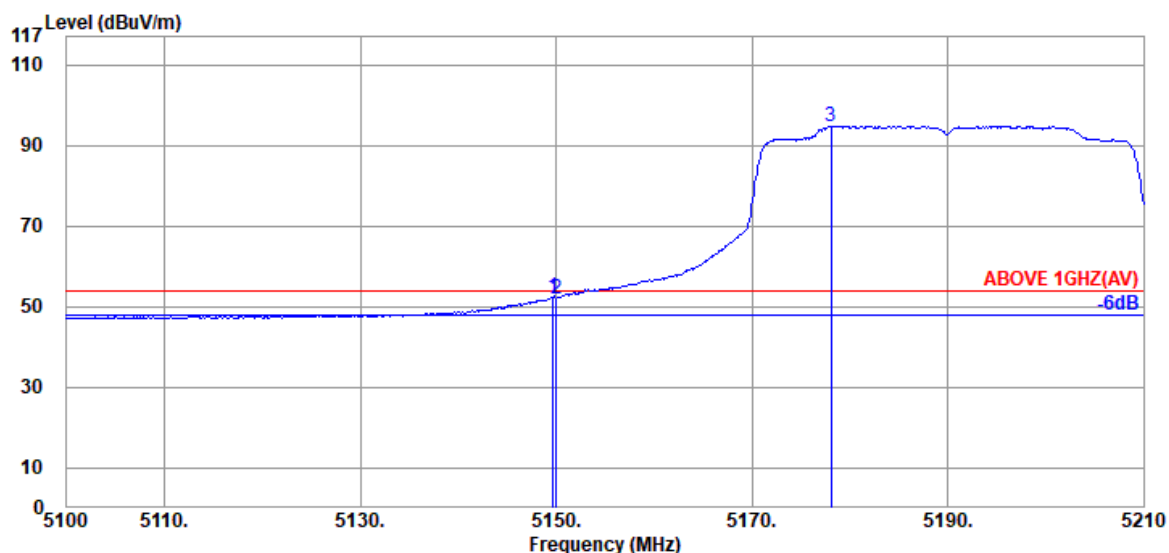


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.92	39.29	48.65	52.48	54.00	1.52	Average
5150.050	34.20	8.92	39.29	48.21	52.04	54.00	1.96	Average
@ 5178.100	34.33	8.95	39.28	90.81	94.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

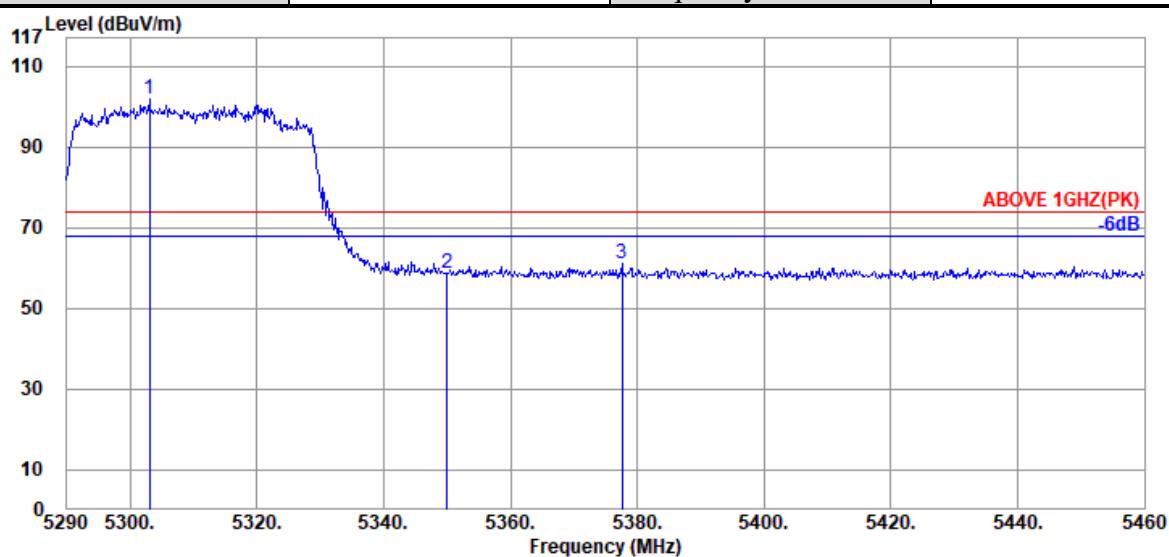

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5303.090	34.50	9.05	39.28	97.48	101.75	---	---	Peak
	5350.010	34.80	9.10	39.27	54.01	58.64	74.00	15.36	Peak
	5377.550	34.93	9.13	39.27	56.20	60.99	74.00	13.01	Peak

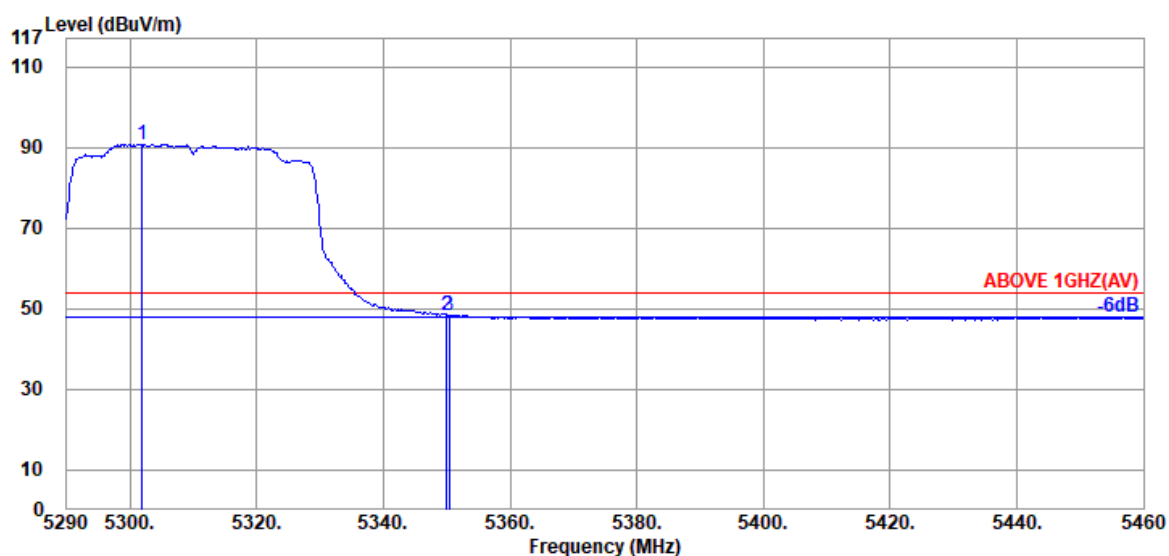

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5301.900	34.50	9.05	39.28	86.39	90.66	---	---	Average
	5350.010	34.80	9.10	39.27	43.72	48.35	54.00	5.65	Average
	5350.350	34.80	9.10	39.27	43.83	48.46	54.00	5.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

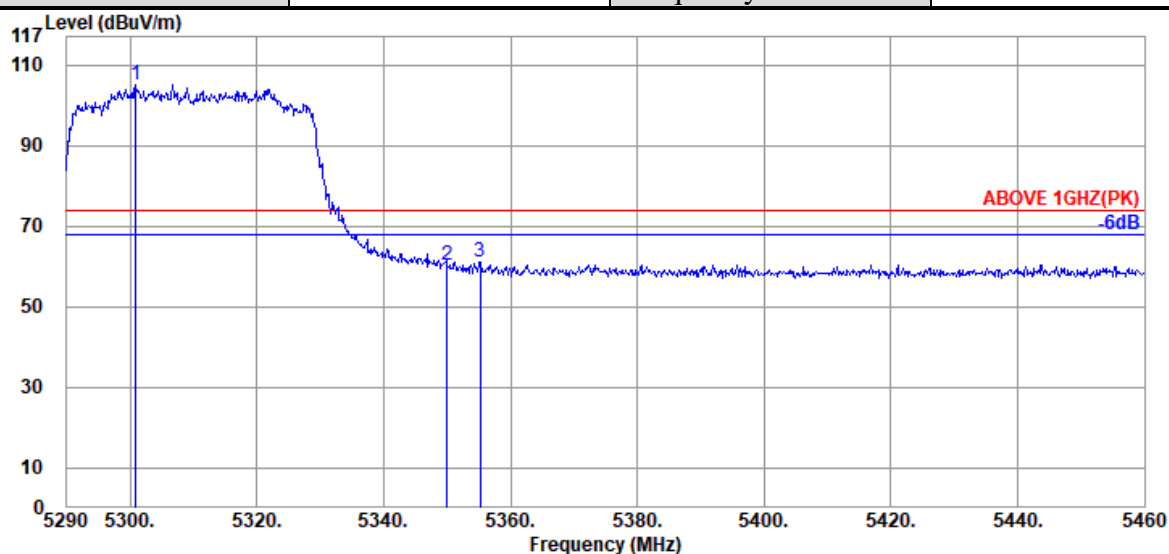

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.880	34.50	9.05	39.28	100.76	105.03	---	---	Peak
5350.010	34.80	9.10	39.27	55.60	60.23	74.00	13.77	Peak
5355.280	34.87	9.10	39.27	56.55	61.25	74.00	12.75	Peak

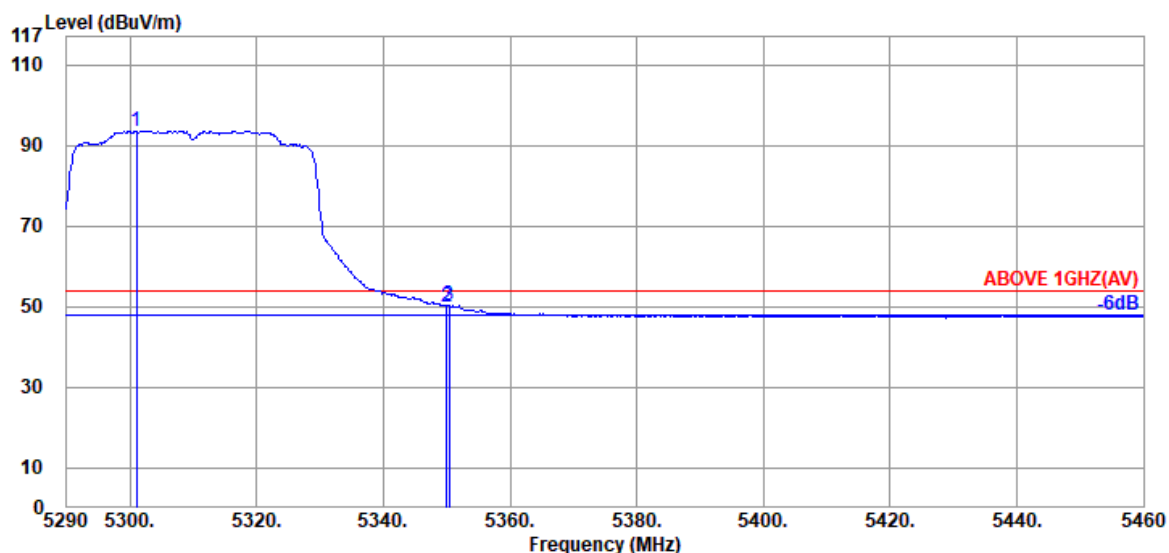

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5301.050	34.50	9.05	39.28	89.30	93.57	---	---	Average
5350.010	34.80	9.10	39.27	45.48	50.11	54.00	3.89	Average
5350.350	34.80	9.10	39.27	45.70	50.33	54.00	3.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

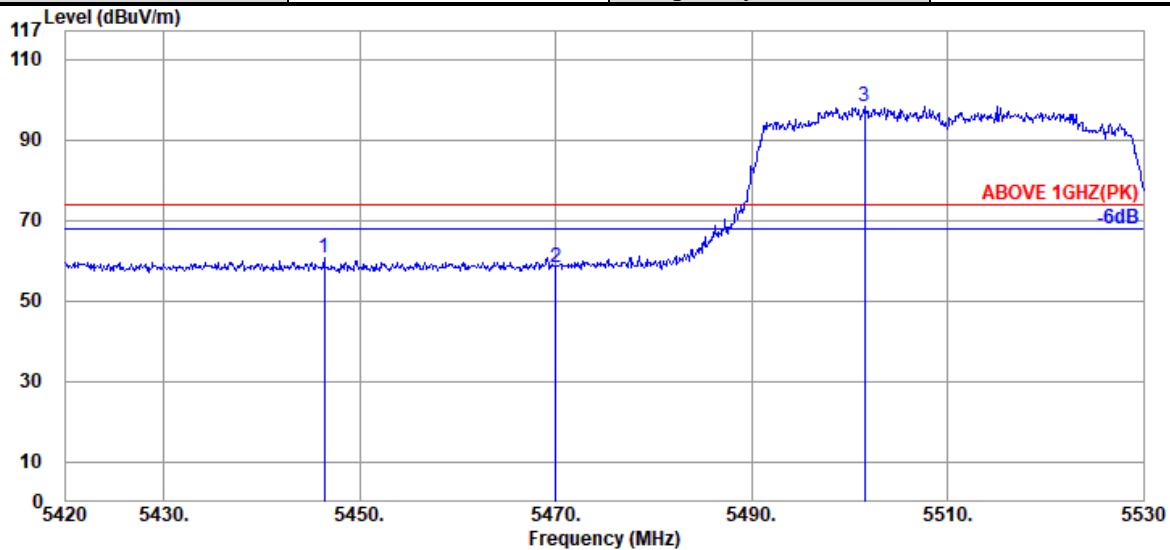

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5446.400	35.00	9.18	39.26	55.83	60.75	74.00	13.25	Peak
5470.050	34.97	9.20	39.26	53.50	58.41	74.00	15.59	Peak
@ 5501.510	34.90	9.23	39.26	93.44	98.31	---	---	Peak

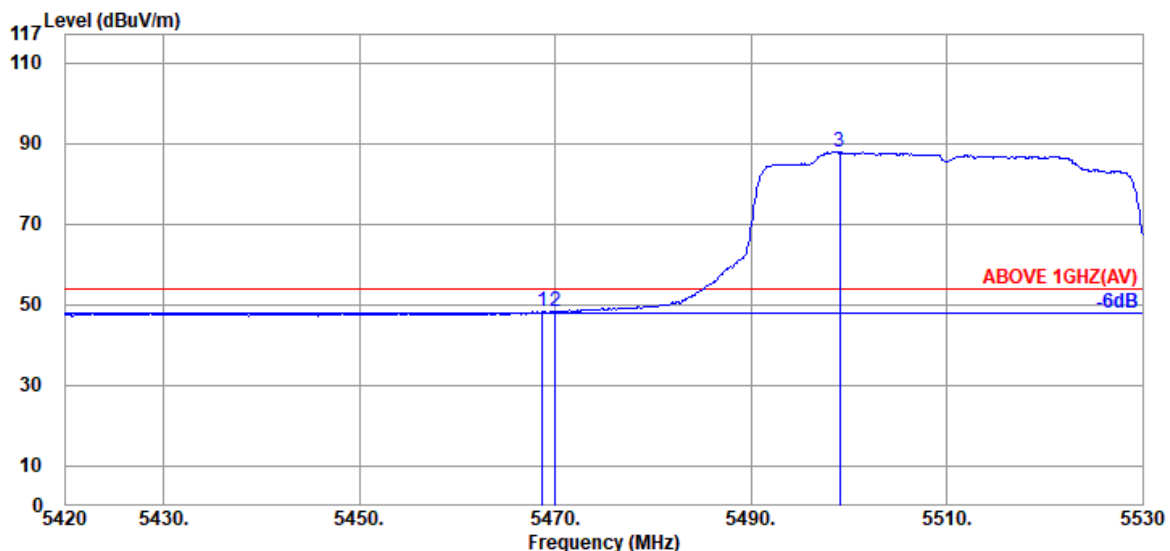

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.730	34.97	9.20	39.26	43.28	48.19	54.00	5.81	Average
5470.050	34.97	9.20	39.26	43.47	48.38	54.00	5.62	Average
@ 5499.090	34.90	9.23	39.26	82.98	87.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

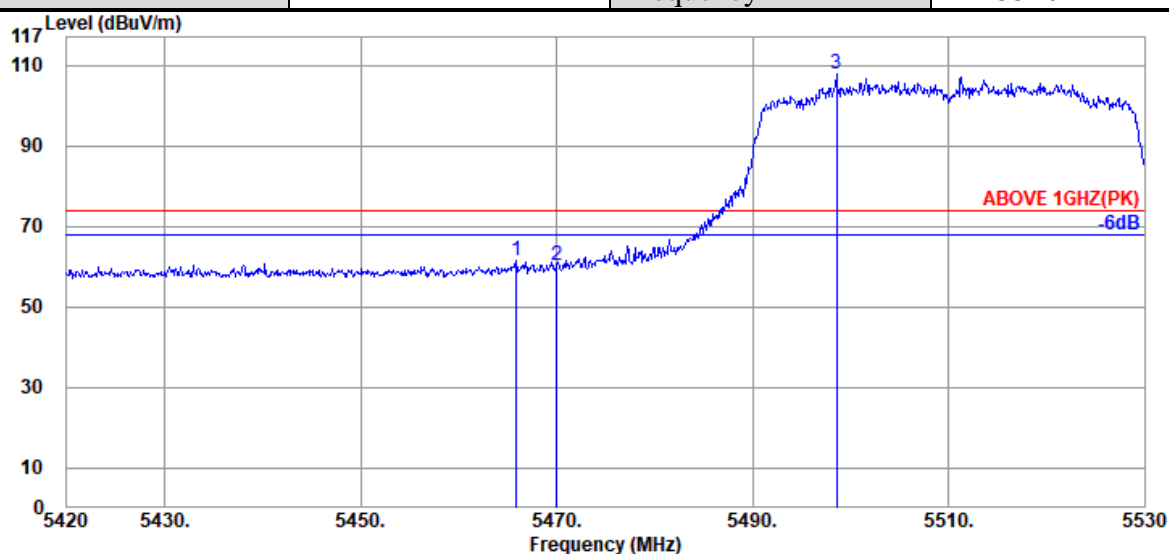

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.870	34.97	9.20	39.26	56.60	61.51	74.00	12.49	Peak
5470.050	34.97	9.20	39.26	55.31	60.22	74.00	13.78	Peak
@ 5498.540	34.90	9.23	39.26	102.81	107.68	---	---	Peak

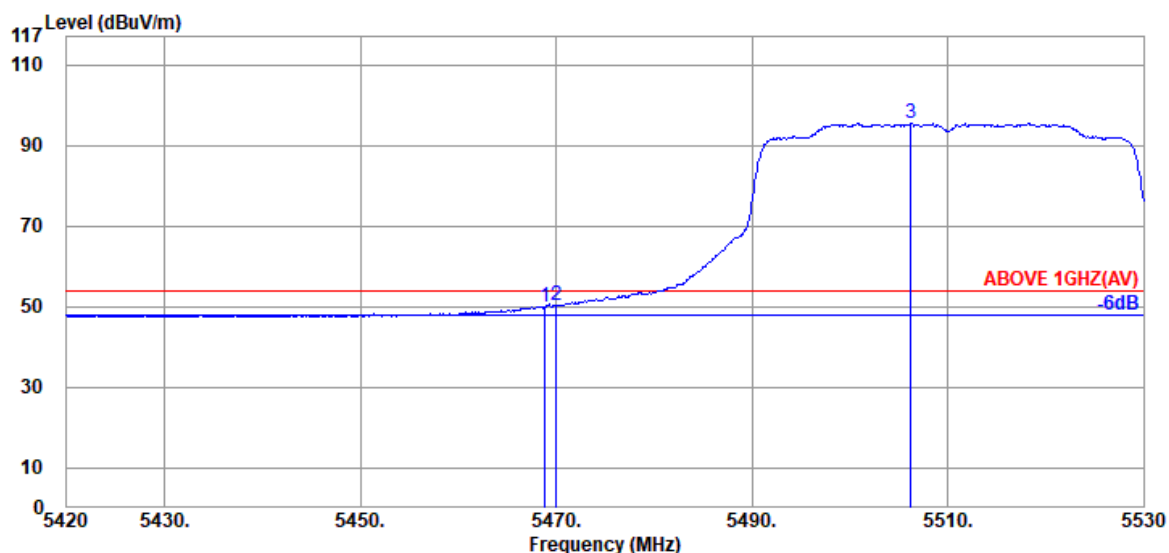

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.840	34.97	9.20	39.26	45.18	50.09	54.00	3.91	Average
5470.050	34.97	9.20	39.26	45.43	50.34	54.00	3.66	Average
@ 5506.240	34.90	9.23	39.26	90.54	95.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

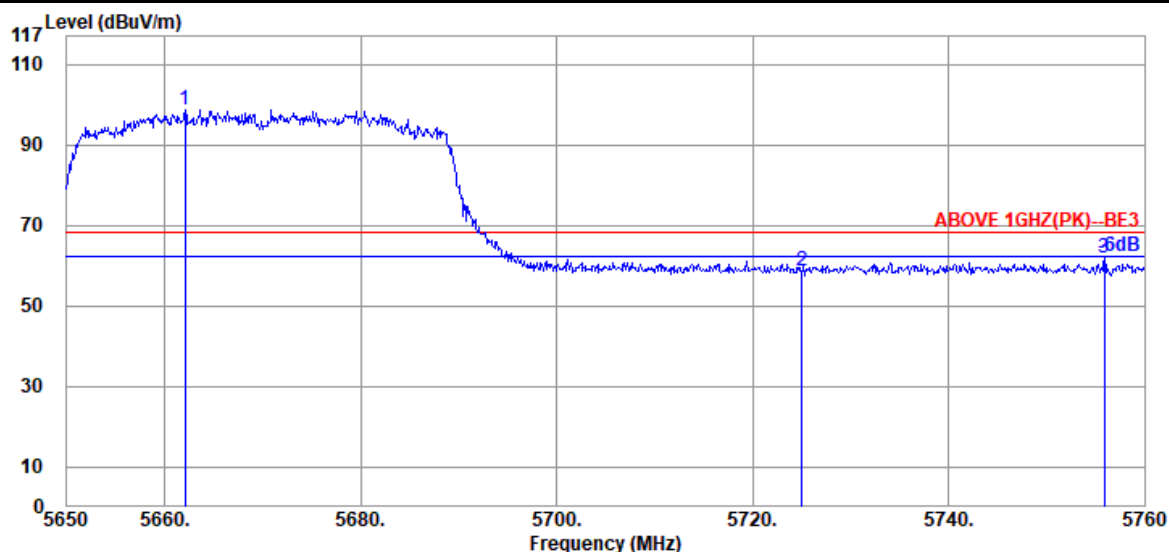

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5662.100	34.63	9.36	39.29	94.09	98.79	---	---	Peak
	5725.020	34.57	9.42	39.30	53.84	58.53	68.20	9.67	Peak
	5755.930	34.60	9.45	39.31	57.03	61.77	68.20	6.43	Peak

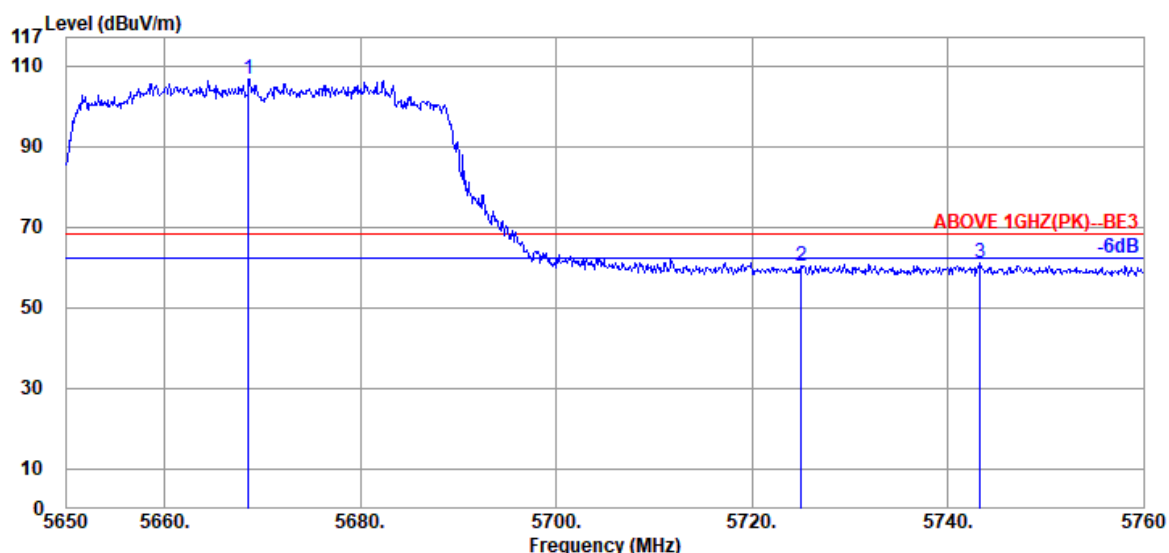

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5668.590	34.63	9.37	39.29	101.80	106.51	---	---	Peak
	5725.020	34.57	9.42	39.30	55.59	60.28	68.20	7.92	Peak
	5743.280	34.60	9.43	39.30	56.21	60.94	68.20	7.26	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

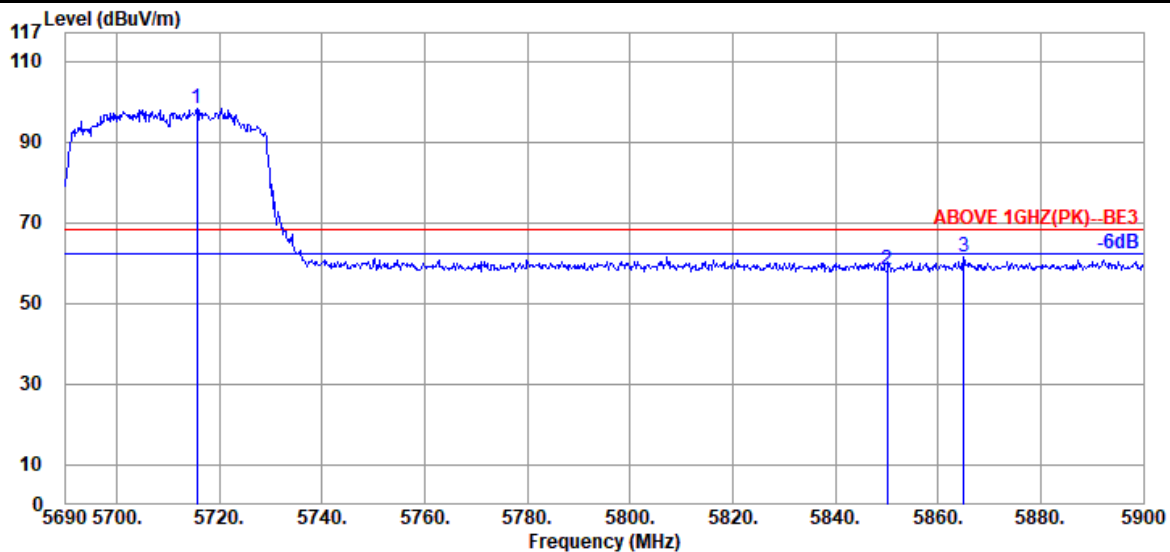

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.620	34.53	9.40	39.30	93.79	98.42	---	---	Peak
	5850.020	34.60	9.52	39.32	53.63	58.43	68.20	9.77	Peak
	5864.930	34.60	9.53	39.33	56.71	61.51	68.20	6.69	Peak

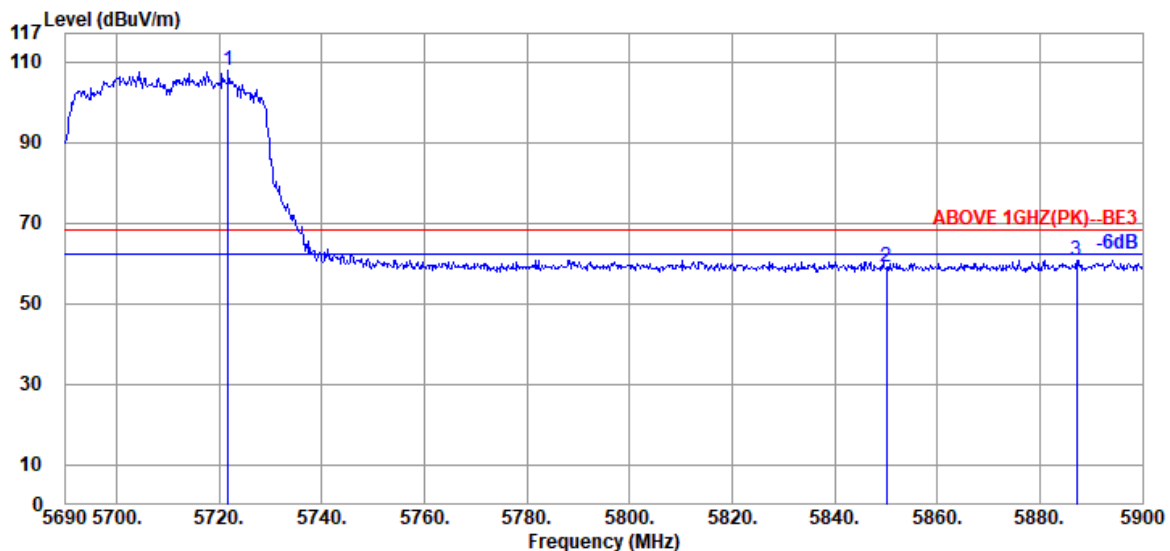

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.710	34.53	9.42	39.30	103.10	107.75	---	---	Peak
	5850.020	34.60	9.52	39.32	54.41	59.21	68.20	8.99	Peak
	5887.190	34.60	9.55	39.33	55.87	60.69	68.20	7.51	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

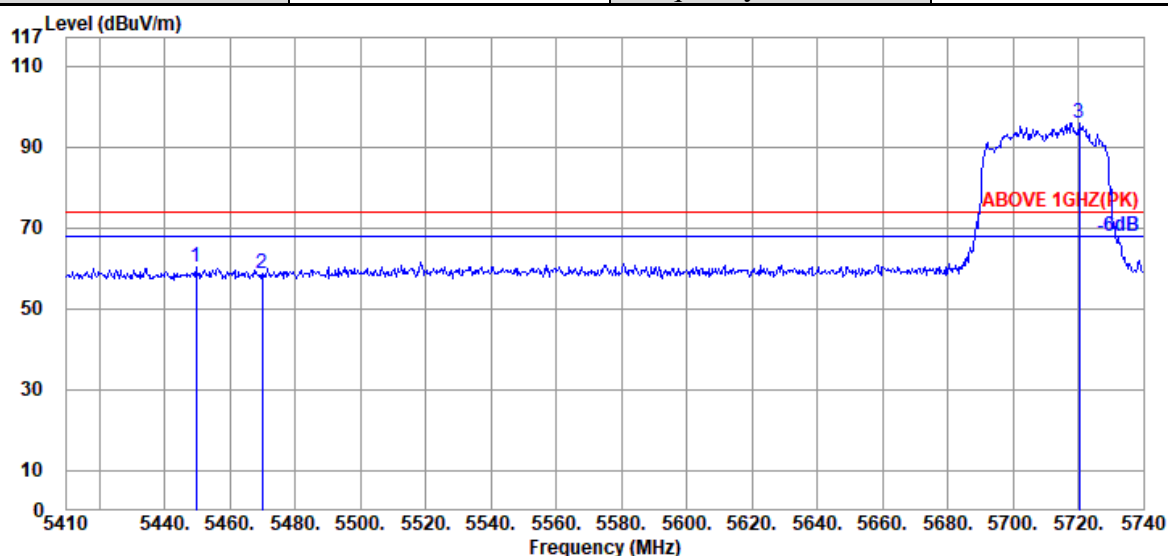

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.600	35.00	9.05	34.22	50.42	60.25	74.00	13.75	Peak
5470.060	34.97	9.06	34.21	48.77	58.59	74.00	15.41	Peak
@ 5720.200	34.53	9.19	34.30	86.36	95.78	---	---	Peak

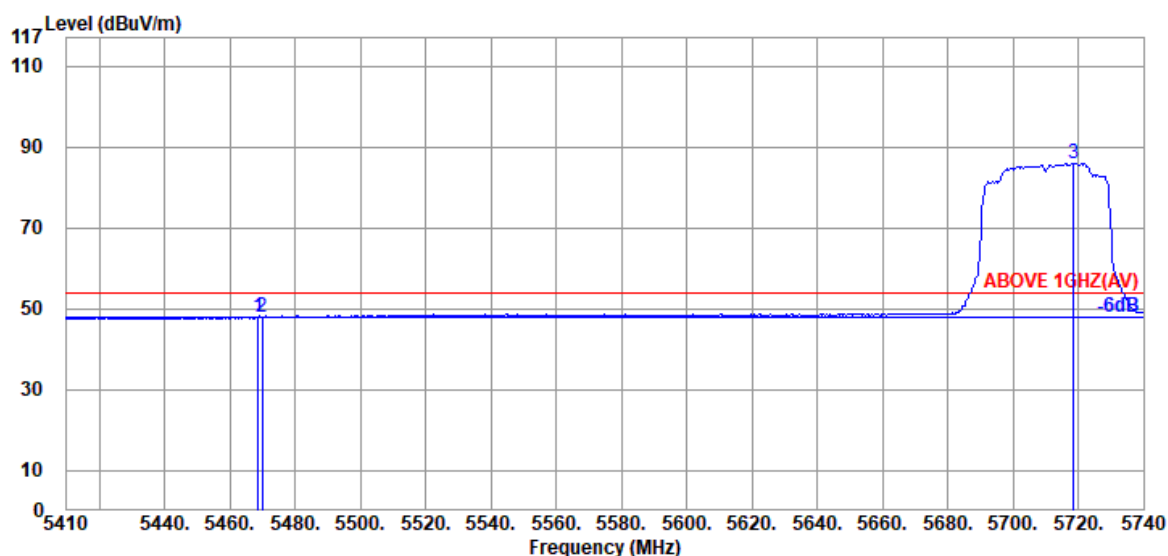

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.97	9.06	34.21	38.21	48.03	54.00	5.97	Average
5470.060	34.97	9.06	34.21	37.90	47.72	54.00	6.28	Average
@ 5718.550	34.53	9.19	34.30	76.56	85.98	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

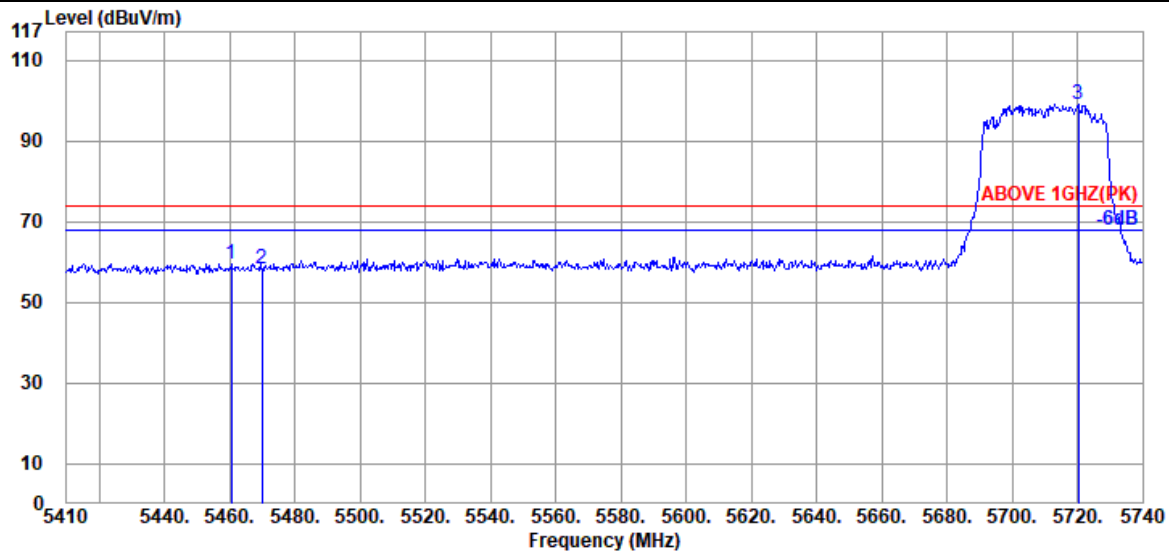

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.490	35.00	9.05	34.21	49.84	59.68	74.00	14.32	Peak
5470.060	34.97	9.06	34.21	48.41	58.23	74.00	15.77	Peak
@ 5720.200	34.53	9.19	34.30	89.70	99.12	---	---	Peak

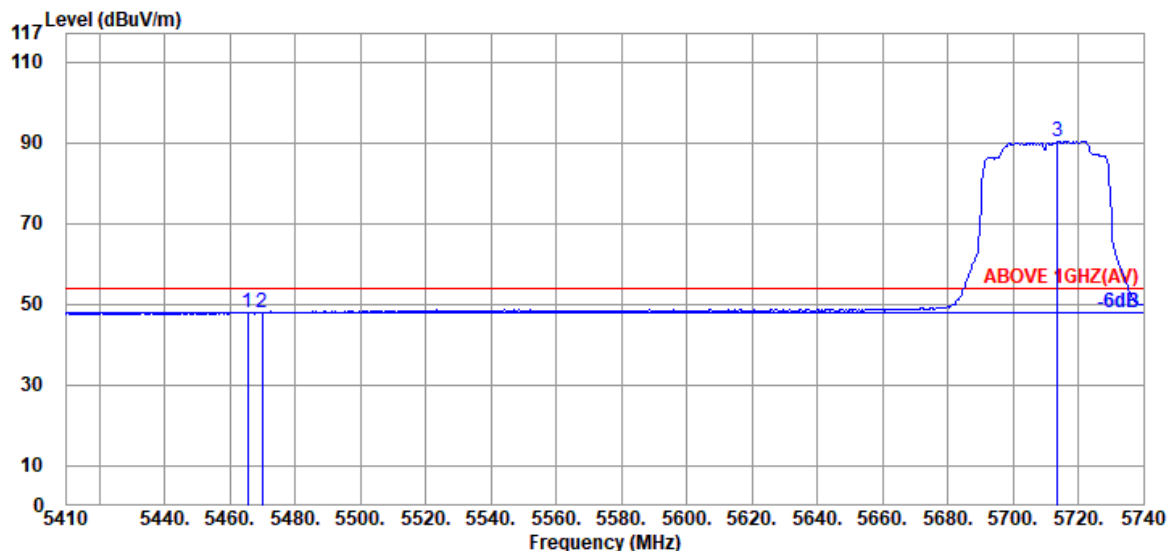

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.440	34.97	9.06	34.21	38.17	47.99	54.00	6.01	Average
5470.060	34.97	9.06	34.21	38.04	47.86	54.00	6.14	Average
@ 5713.600	34.53	9.19	34.30	80.85	90.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

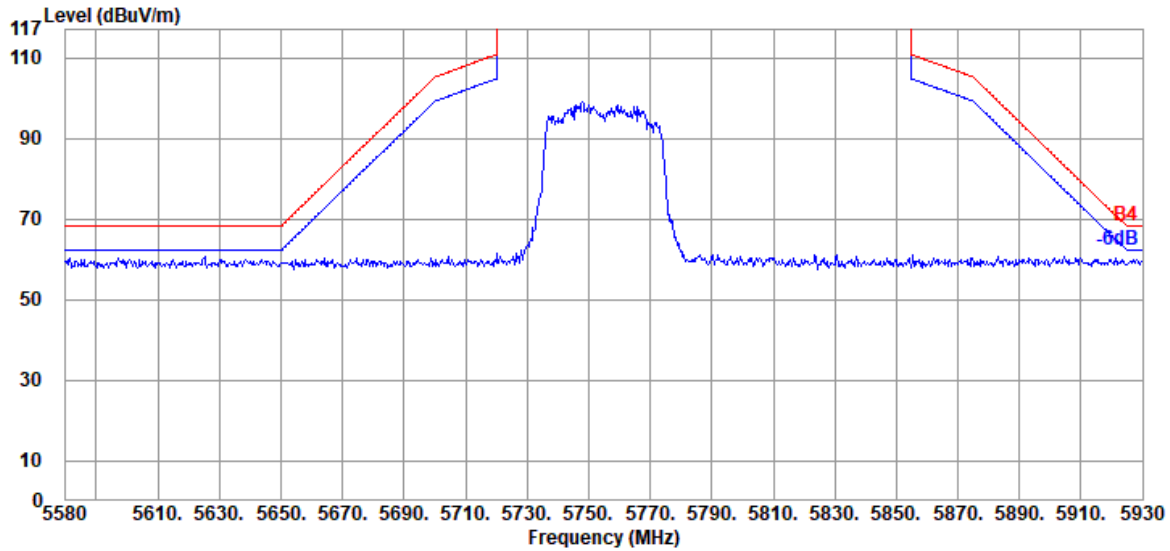

Antenna at Vertical Polarization

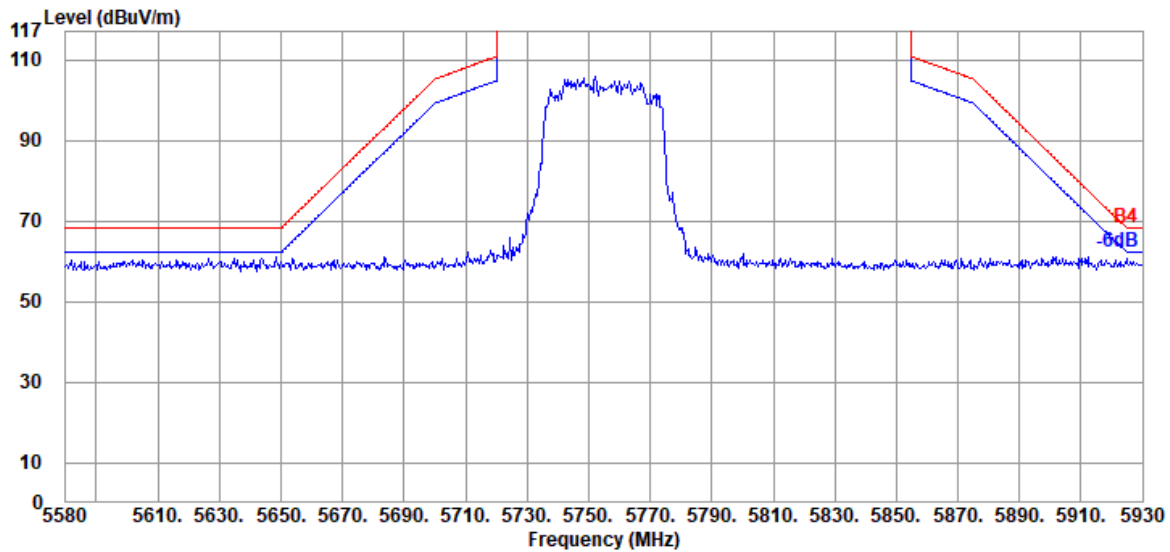


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

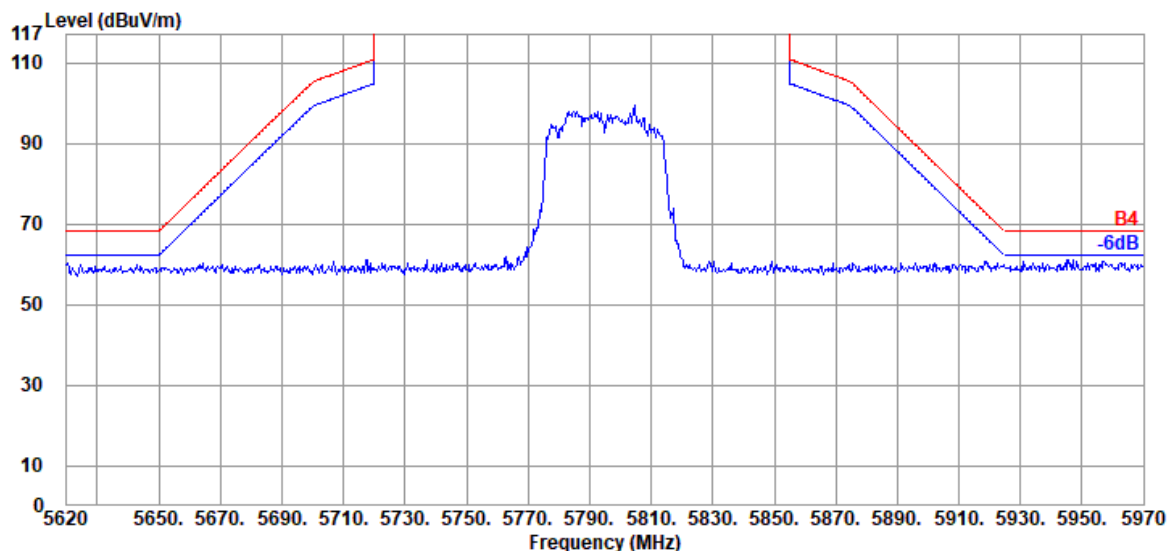


Antenna at Vertical Polarization

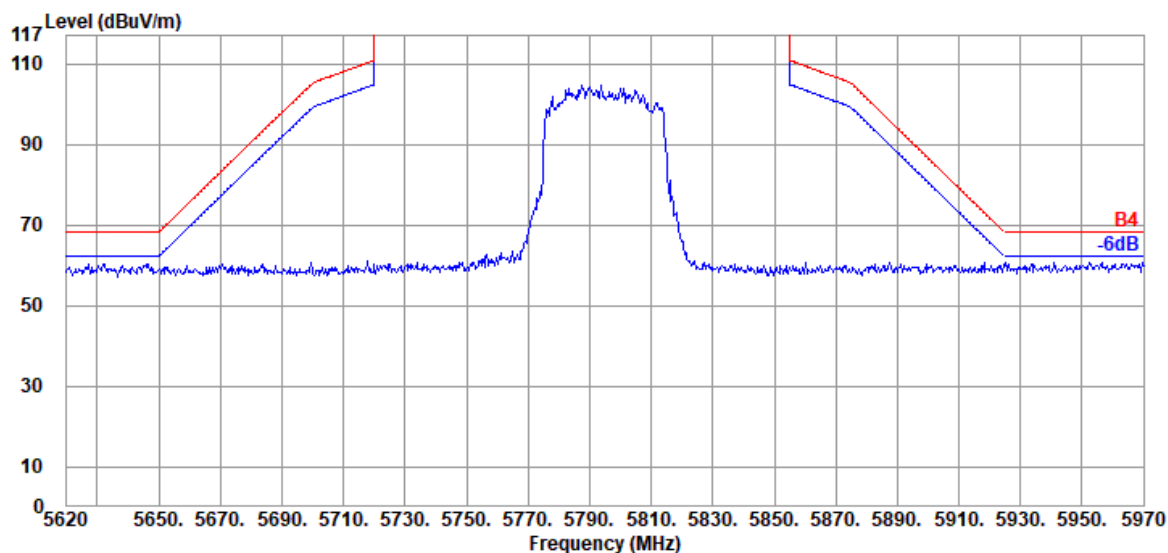

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

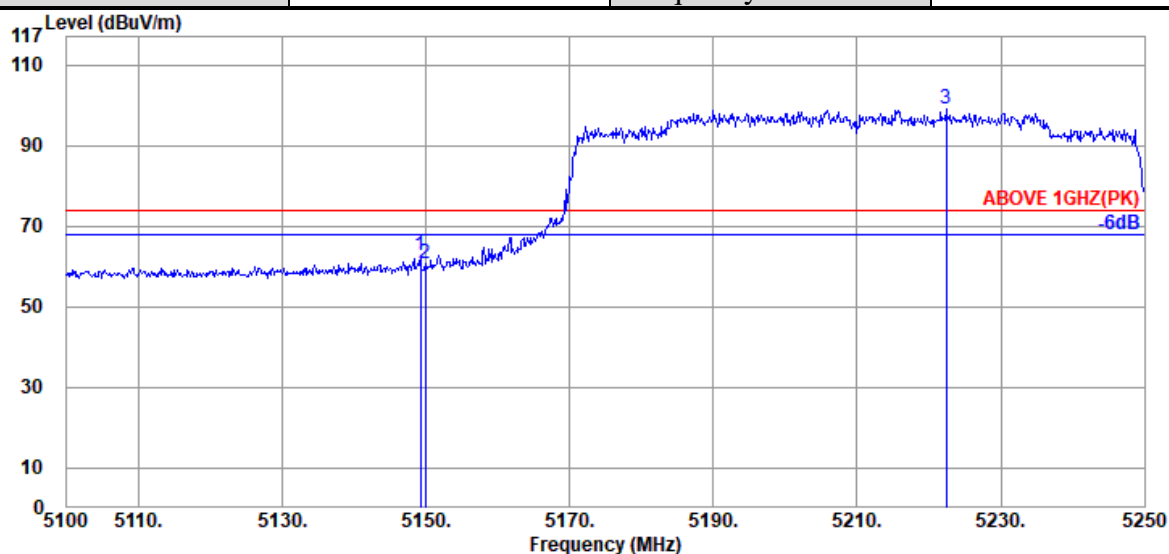

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	8.92	39.29	58.69	62.52	74.00	11.48	Peak
5149.950	34.20	8.92	39.29	56.86	60.69	74.00	13.31	Peak
@ 5222.400	34.40	8.98	39.28	94.98	99.08	---	---	Peak

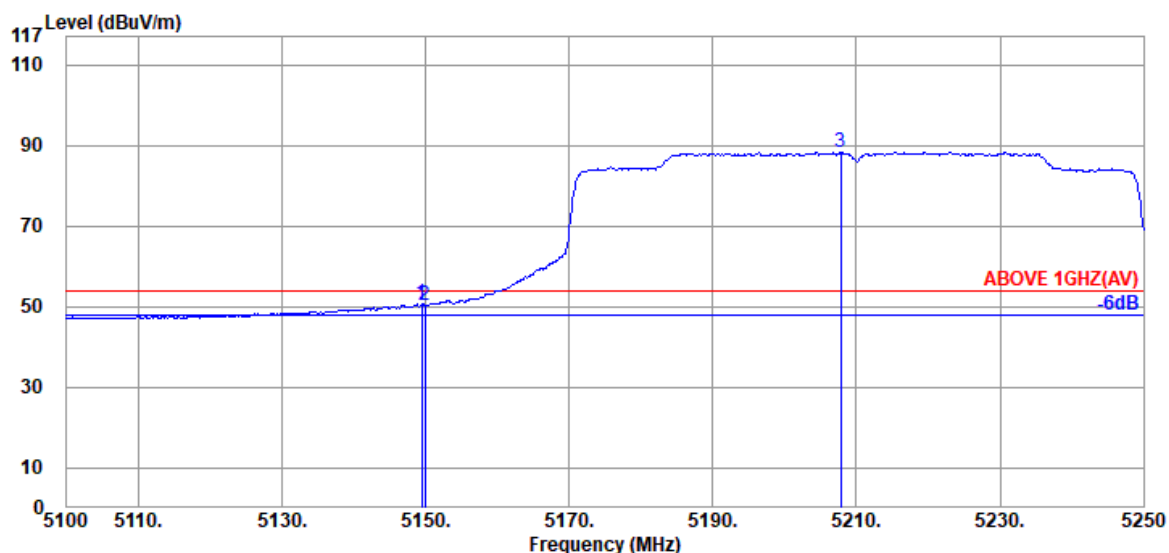


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	39.29	46.87	50.70	54.00	3.30	Average
5149.950	34.20	8.92	39.29	46.61	50.44	54.00	3.56	Average
@ 5207.850	34.40	8.98	39.28	84.16	88.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

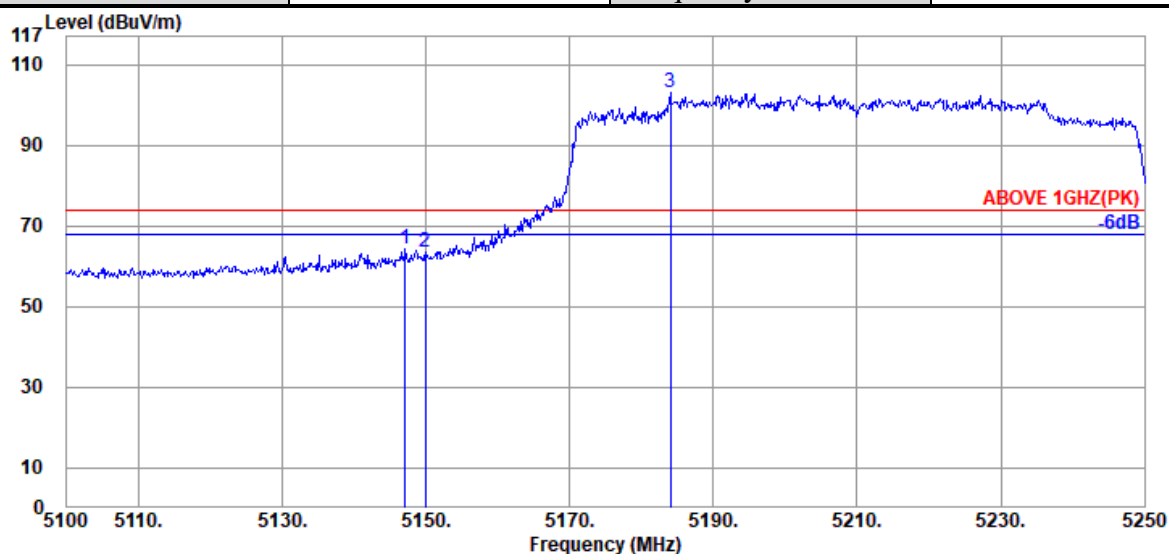

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.20	8.92	39.29	60.60	64.43	74.00	9.57	Peak
5149.950	34.20	8.92	39.29	59.74	63.57	74.00	10.43	Peak
@ 5184.000	34.33	8.95	39.28	98.92	102.92	---	---	Peak

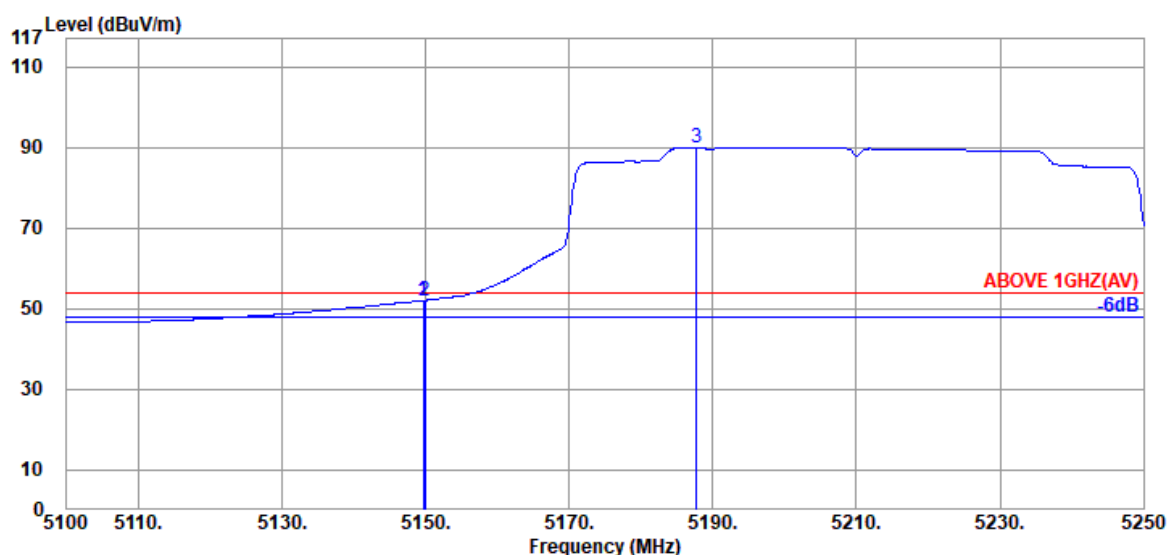


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	39.29	48.19	52.02	54.00	1.98	Average
5149.950	34.20	8.92	39.29	48.27	52.10	54.00	1.90	Average
@ 5187.750	34.40	8.95	39.28	85.92	89.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

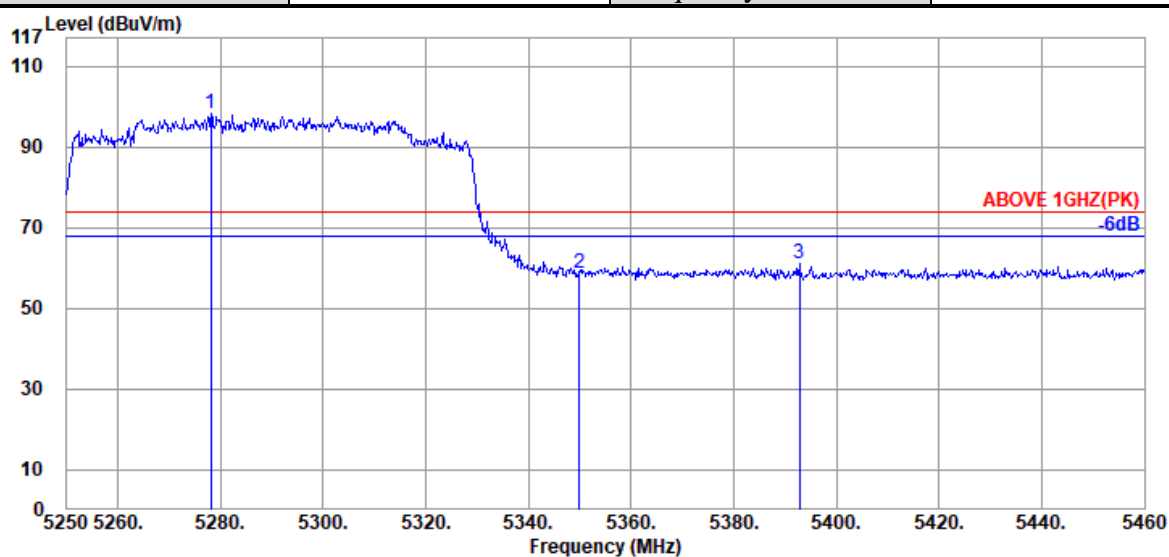

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.140	34.47	9.04	39.28	94.14	98.37	---	---	Peak
5349.960	34.80	9.10	39.27	54.14	58.77	74.00	15.23	Peak
5392.800	35.00	9.13	39.27	56.40	61.26	74.00	12.74	Peak

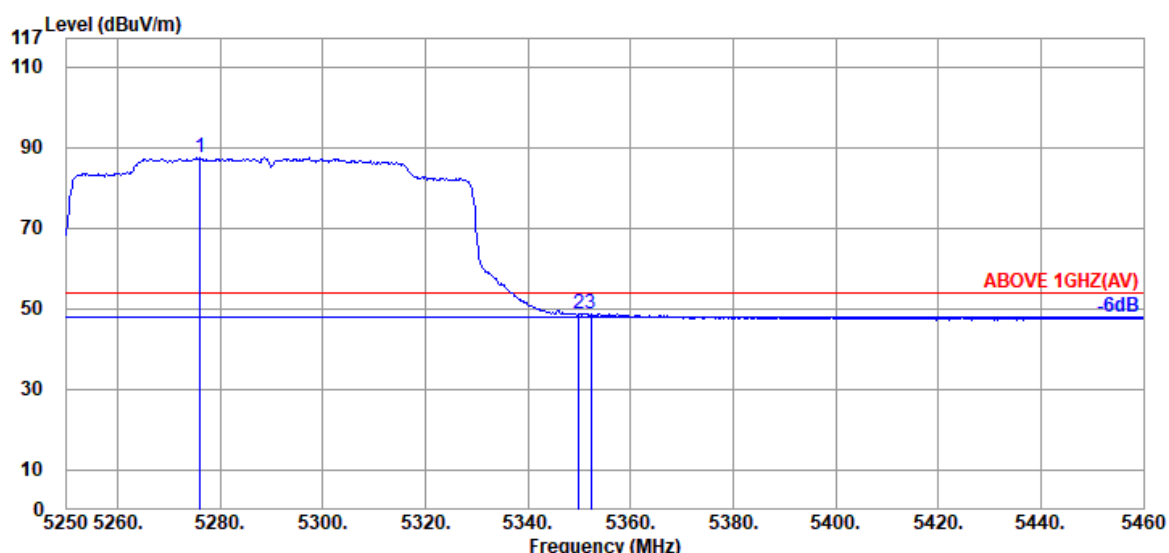

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.040	34.43	9.04	39.28	83.23	87.42	---	---	Average
5349.960	34.80	9.10	39.27	43.89	48.52	54.00	5.48	Average
5352.270	34.80	9.10	39.27	44.09	48.72	54.00	5.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

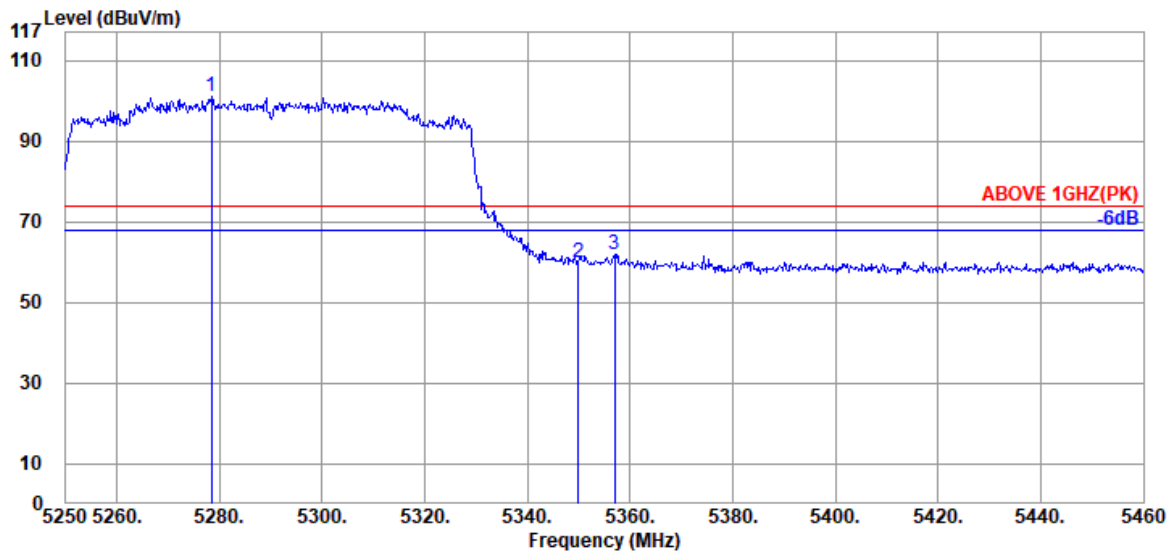

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.350	34.47	9.04	39.28	96.68	100.91	---	---	Peak
5349.960	34.80	9.10	39.27	55.27	59.90	74.00	14.10	Peak
5356.890	34.87	9.10	39.27	57.29	61.99	74.00	12.01	Peak

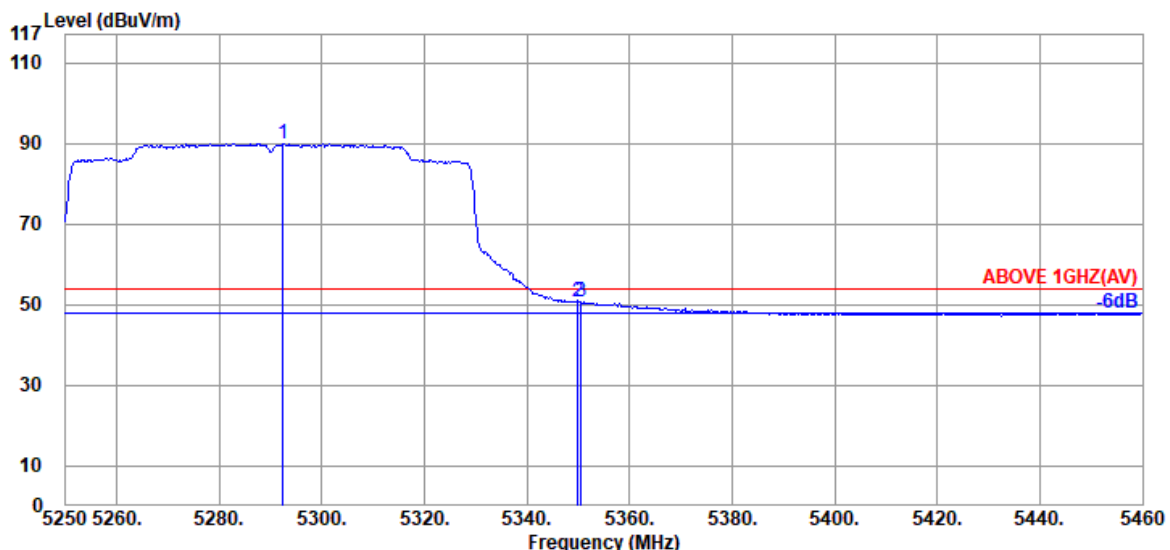

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.420	34.47	9.04	39.28	85.66	89.89	---	---	Average
5349.960	34.80	9.10	39.27	46.00	50.63	54.00	3.37	Average
5350.590	34.80	9.10	39.27	45.96	50.59	54.00	3.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

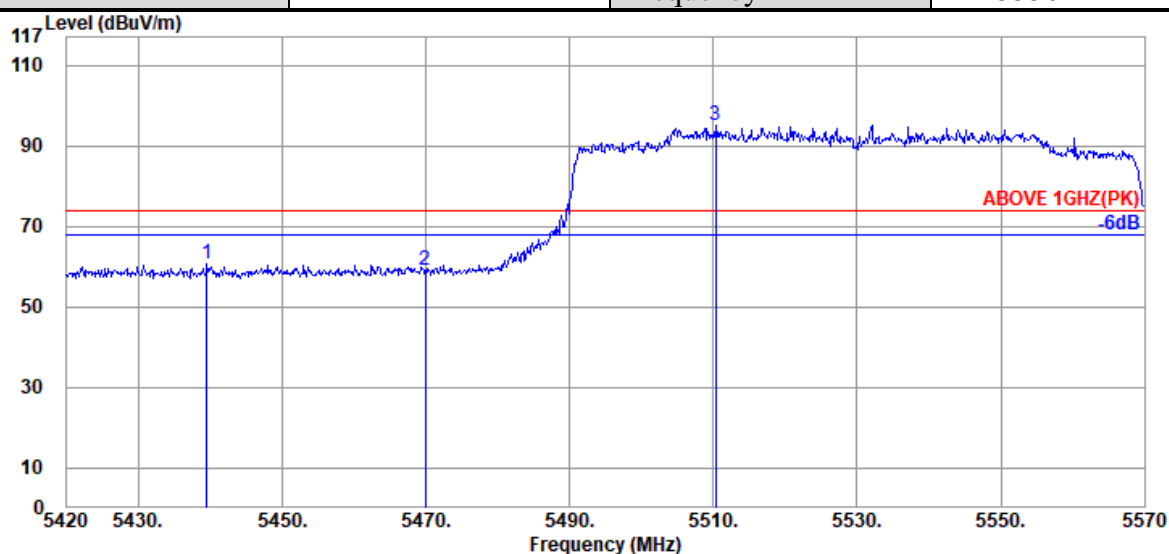

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.500	35.00	9.17	39.26	55.73	60.64	74.00	13.36	Peak
5469.950	34.97	9.20	39.26	54.09	59.00	74.00	15.00	Peak
@ 5510.300	34.90	9.23	39.26	90.05	94.92	---	---	Peak

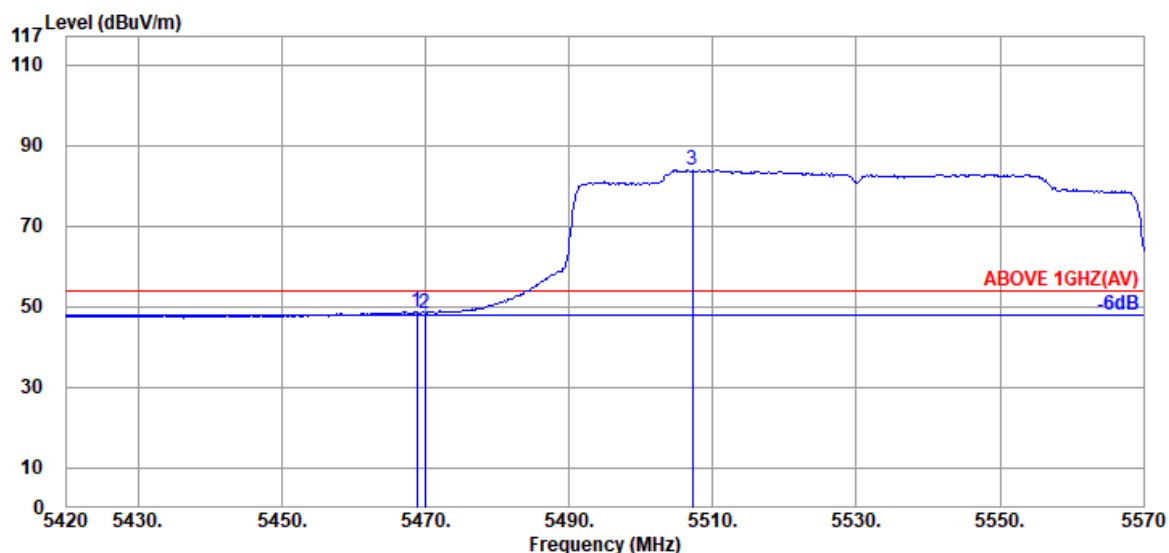


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.97	9.20	39.26	43.85	48.76	54.00	5.24	Average
5469.950	34.97	9.20	39.26	43.56	48.47	54.00	5.53	Average
@ 5507.150	34.90	9.23	39.26	79.03	83.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

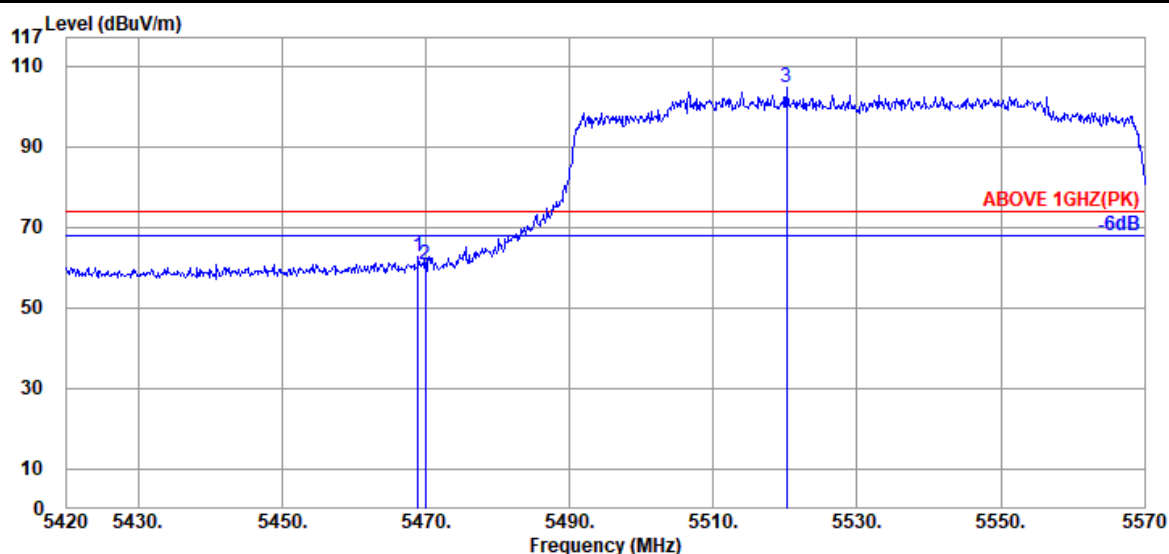

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	57.79	62.70	74.00	11.30	Peak
5469.950	34.97	9.20	39.26	55.85	60.76	74.00	13.24	Peak
@ 5520.200	34.87	9.24	39.26	99.73	104.58	---	---	Peak

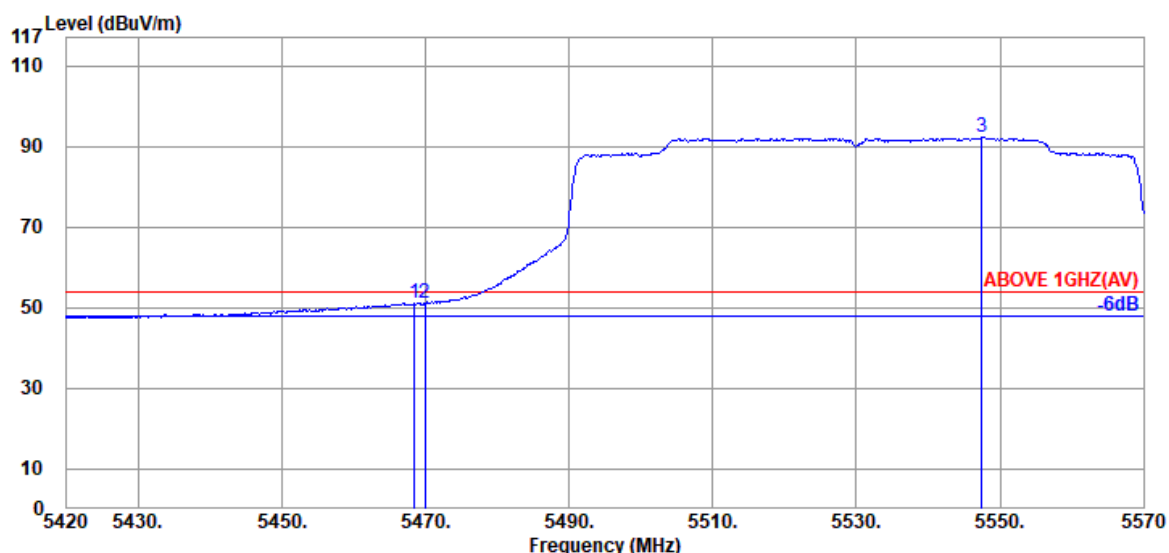

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.97	9.20	39.26	46.28	51.19	54.00	2.81	Average
5469.950	34.97	9.20	39.26	46.26	51.17	54.00	2.83	Average
@ 5547.500	34.80	9.27	39.27	87.36	92.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

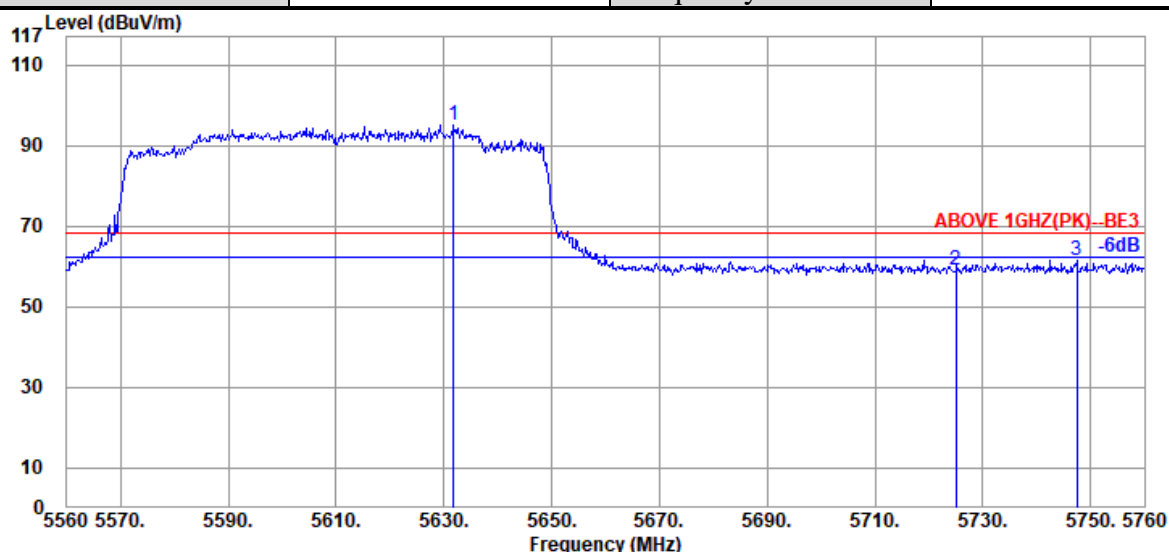

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.800	34.70	9.33	39.28	90.18	94.93	---	---	Peak
5725.000	34.57	9.42	39.30	54.39	59.08	68.20	9.12	Peak
5747.400	34.60	9.43	39.31	56.90	61.62	68.20	6.58	Peak

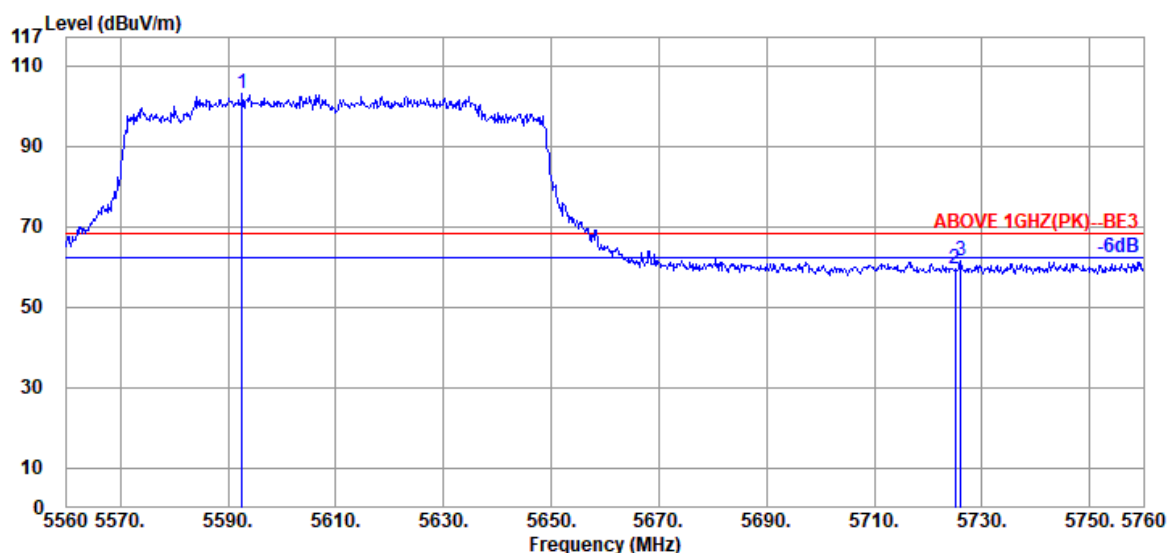

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.600	34.70	9.30	39.28	98.16	102.88	---	---	Peak
5725.000	34.57	9.42	39.30	54.96	59.65	68.20	8.55	Peak
5726.000	34.57	9.42	39.30	56.93	61.62	68.20	6.58	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

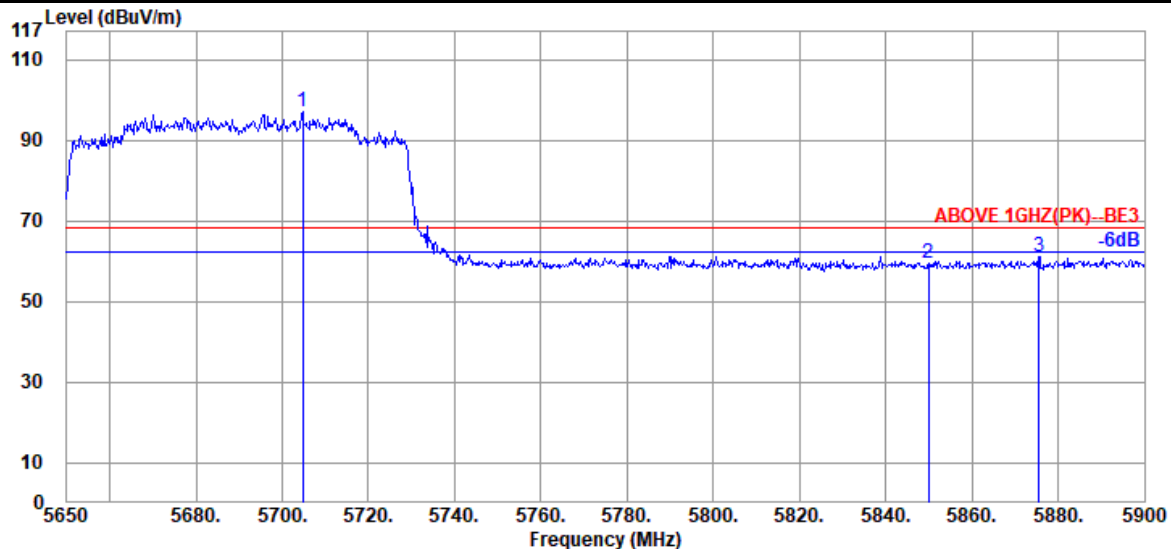

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.750	34.50	9.40	39.30	92.27	96.87	---	---	Peak
5850.000	34.60	9.52	39.32	54.55	59.35	68.20	8.85	Peak
5875.500	34.60	9.55	39.33	56.29	61.11	68.20	7.09	Peak

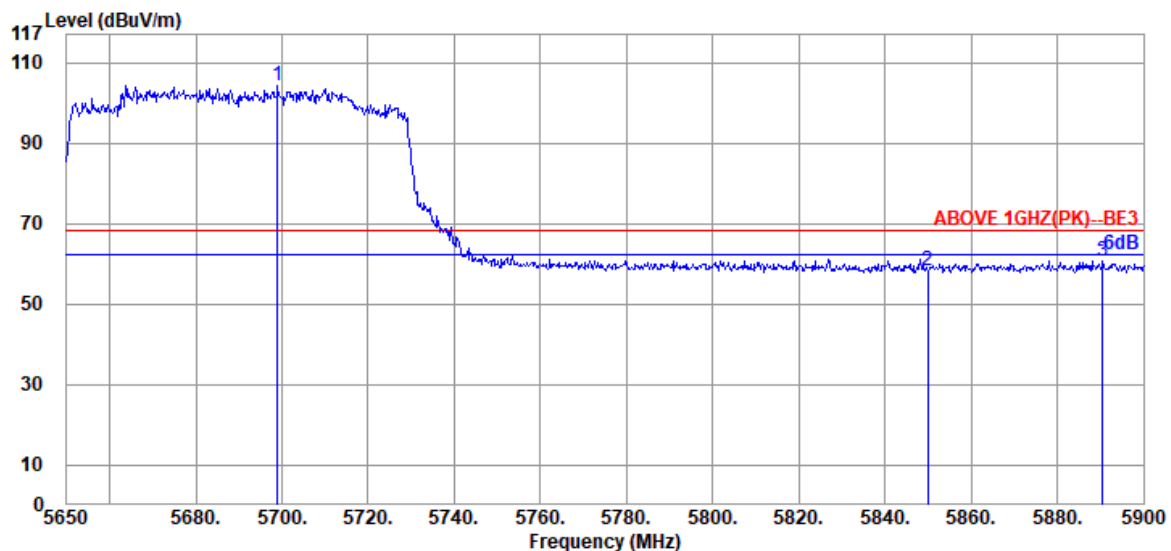

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.000	34.50	9.39	39.30	99.72	104.31	---	---	Peak
5850.000	34.60	9.52	39.32	53.32	58.12	68.20	10.08	Peak
5890.500	34.60	9.56	39.33	56.05	60.88	68.20	7.32	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

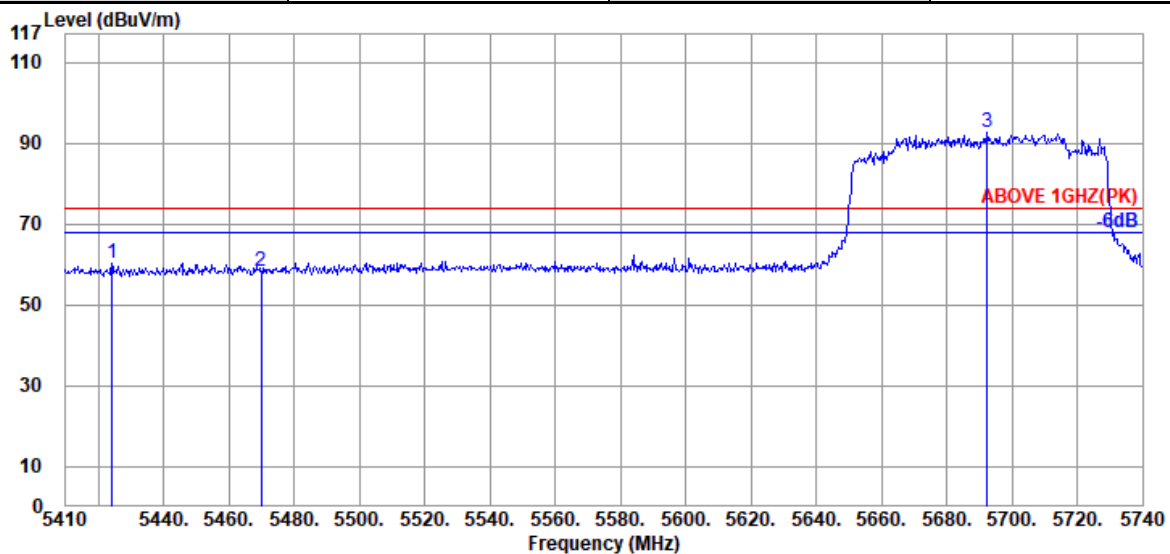

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.190	35.00	9.04	34.23	50.59	60.40	74.00	13.60	Peak
5470.060	34.97	9.06	34.21	48.44	58.26	74.00	15.74	Peak
@ 5692.480	34.50	9.18	34.29	83.08	92.47	---	---	Peak

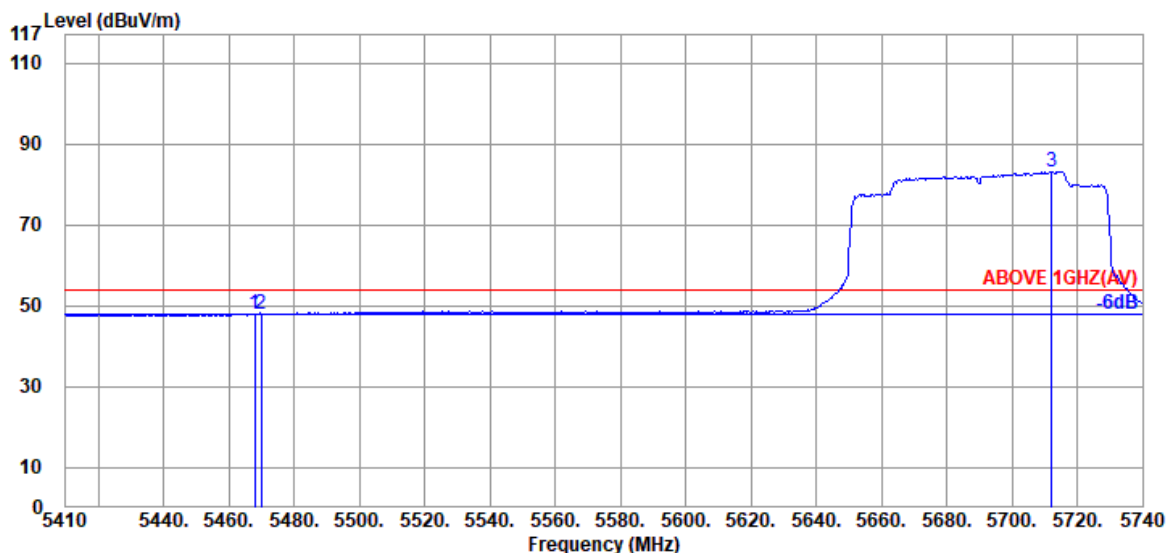

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.080	34.97	9.06	34.21	38.21	48.03	54.00	5.97	Average
5470.060	34.97	9.06	34.21	38.02	47.84	54.00	6.16	Average
@ 5712.280	34.53	9.19	34.30	73.60	83.02	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

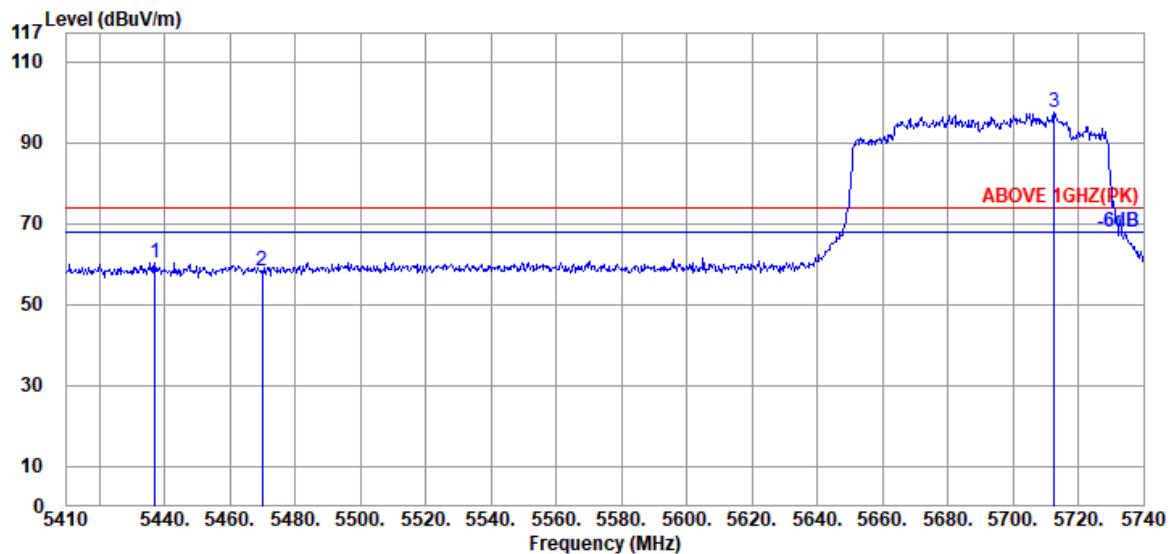

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.060	35.00	9.04	34.22	50.39	60.21	74.00	13.79	Peak
5470.060	34.97	9.06	34.21	48.30	58.12	74.00	15.88	Peak
@ 5712.610	34.53	9.19	34.30	87.93	97.35	---	---	Peak

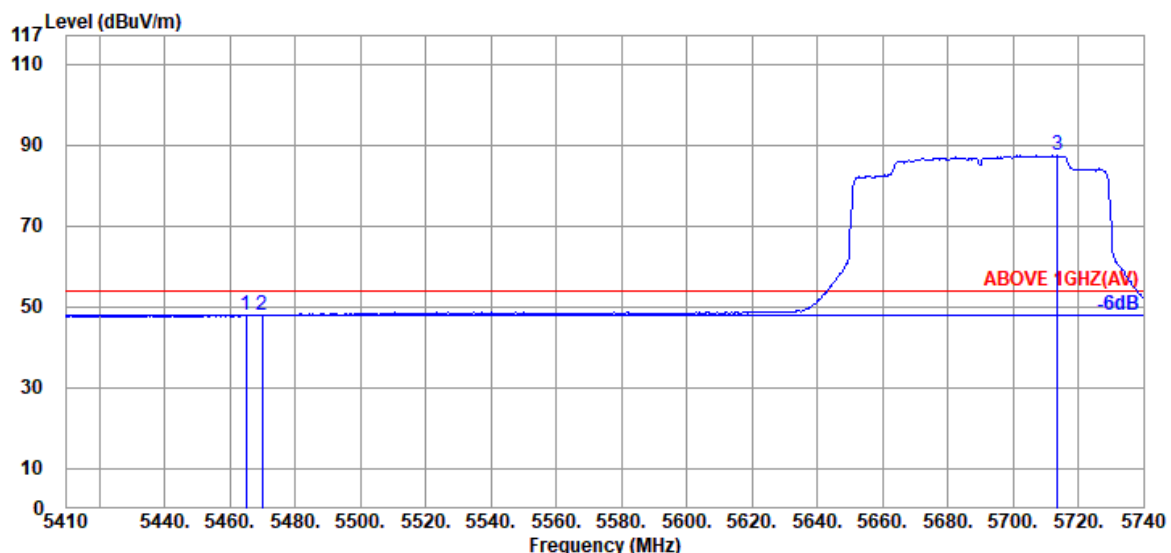

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.97	9.06	34.21	38.23	48.05	54.00	5.95	Average
5470.060	34.97	9.06	34.21	38.07	47.89	54.00	6.11	Average
@ 5713.600	34.53	9.19	34.30	77.91	87.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

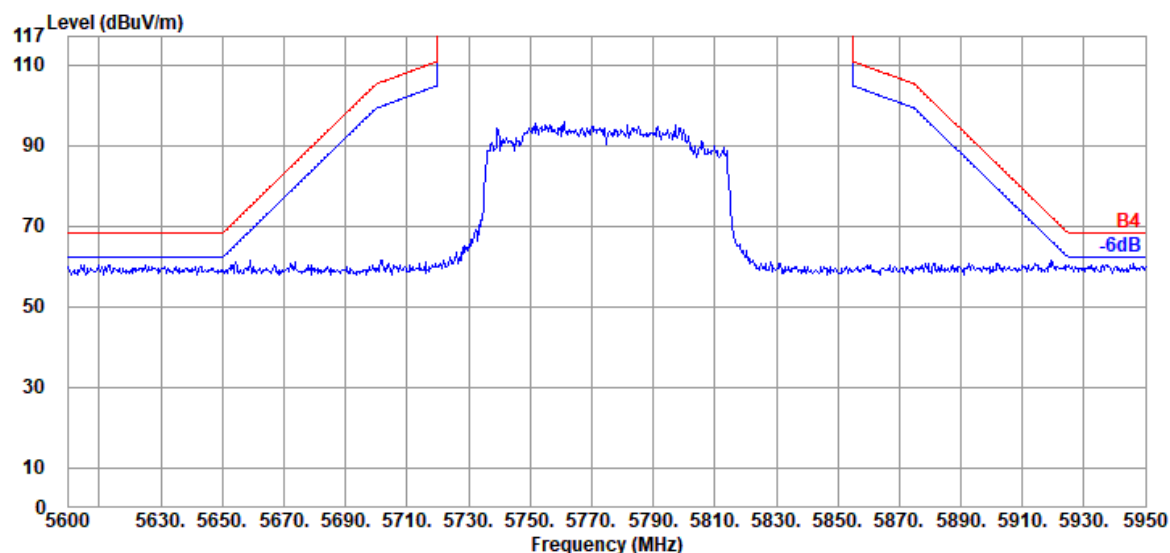

Antenna at Vertical Polarization

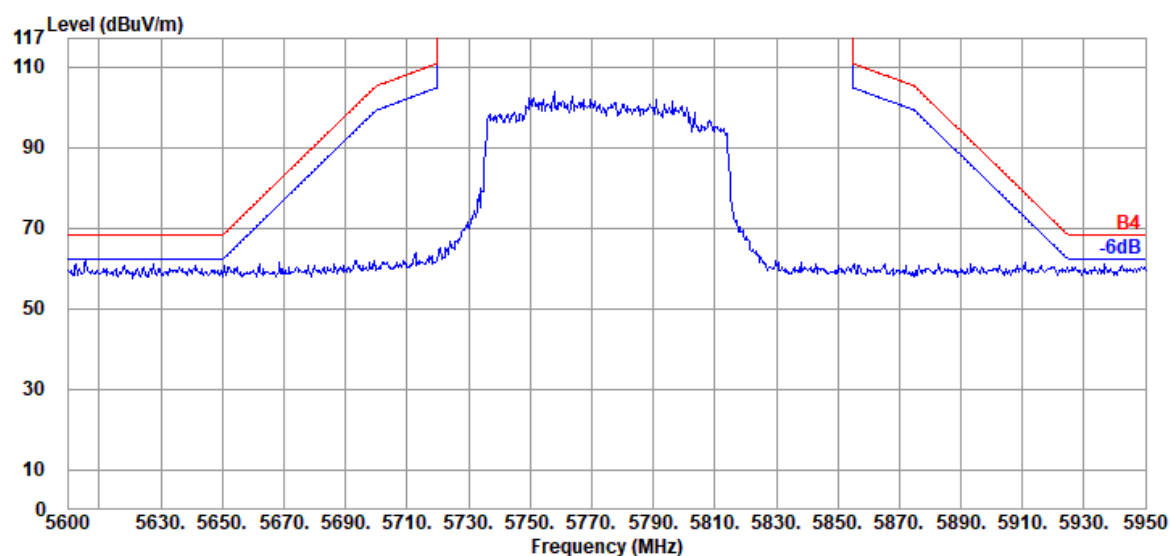


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

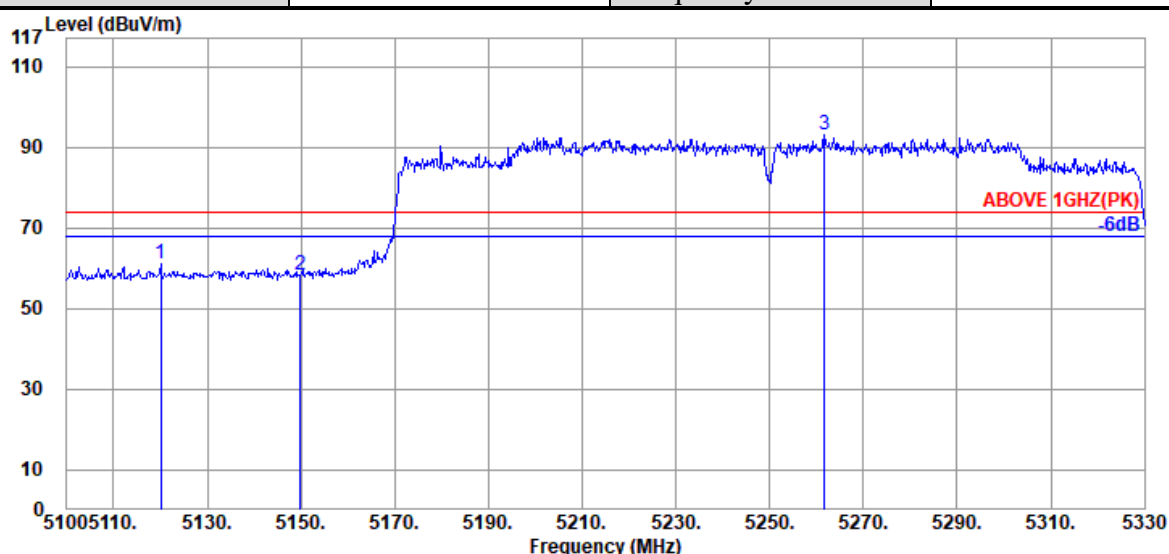

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5120.010	34.07	8.89	39.29	57.36	61.03	74.00	12.97	Peak
5149.910	34.20	8.92	39.29	54.66	58.49	74.00	15.51	Peak
@ 5261.690	34.40	9.02	39.28	88.72	92.86	---	---	Peak

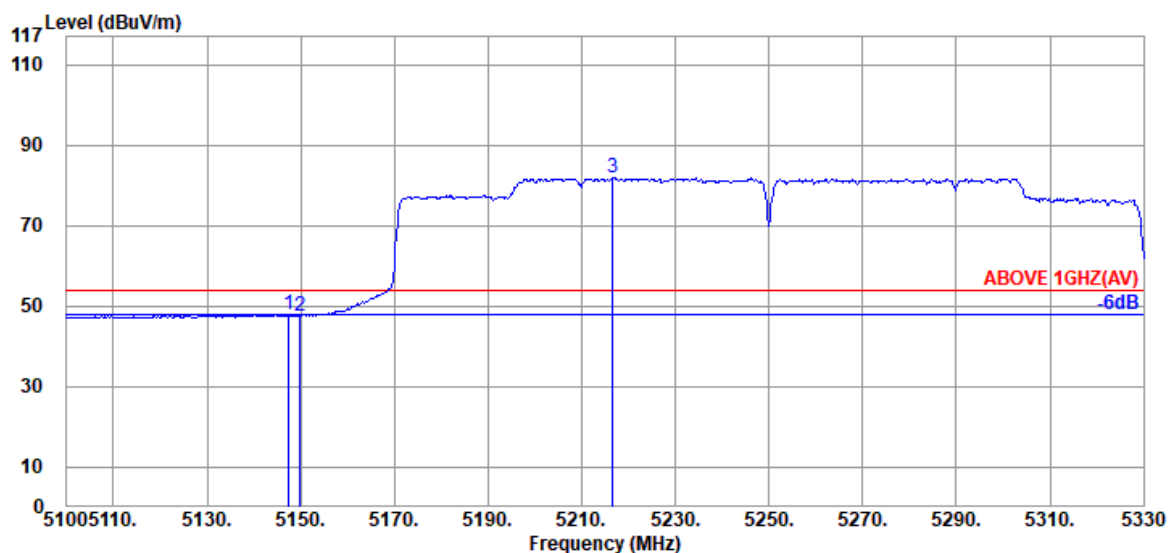


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.380	34.20	8.92	39.29	44.21	48.04	54.00	5.96	Average
5149.910	34.20	8.92	39.29	43.74	47.57	54.00	6.43	Average
@ 5216.610	34.40	8.98	39.28	77.72	81.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

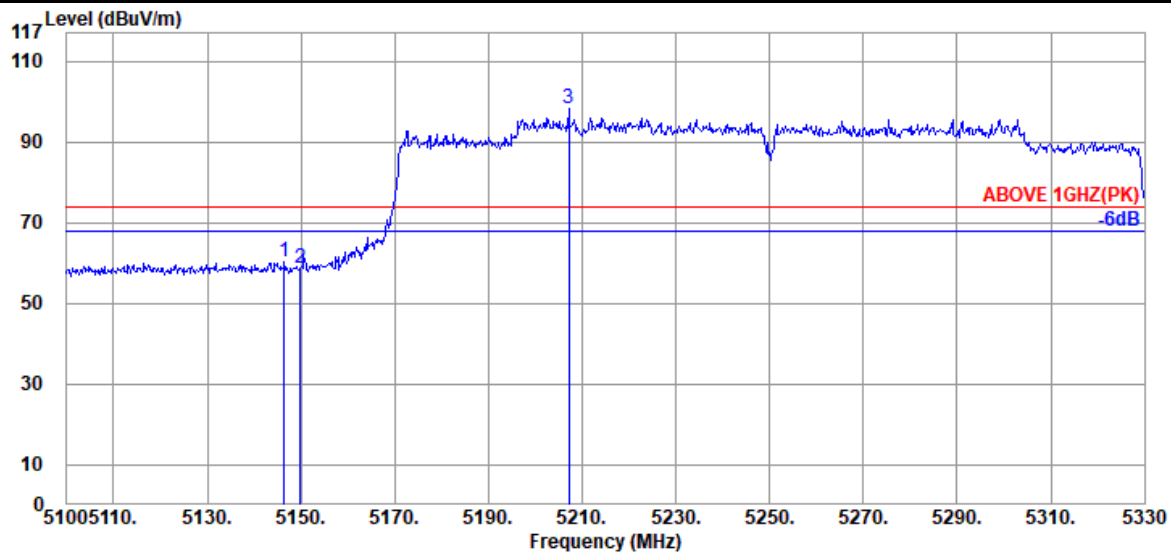

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.460	34.20	8.92	39.29	56.39	60.22	74.00	13.78	Peak
5149.910	34.20	8.92	39.29	55.07	58.90	74.00	15.10	Peak
@ 5207.180	34.40	8.96	39.28	94.29	98.37	---	---	Peak

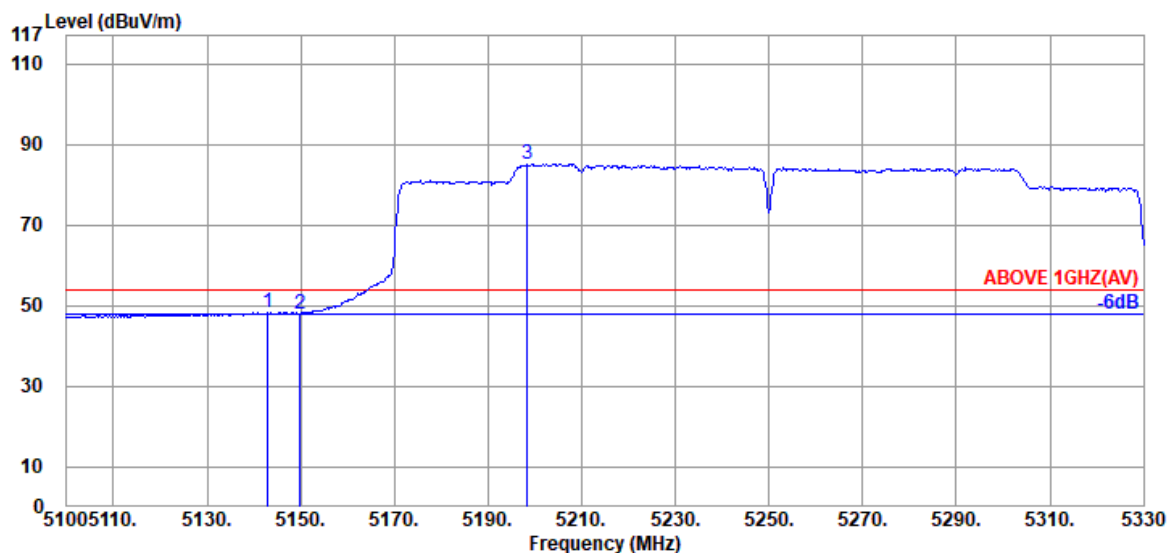

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.010	34.20	8.92	39.29	44.55	48.38	54.00	5.62	Average
5149.910	34.20	8.92	39.29	44.25	48.08	54.00	5.92	Average
@ 5198.440	34.40	8.96	39.28	81.11	85.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

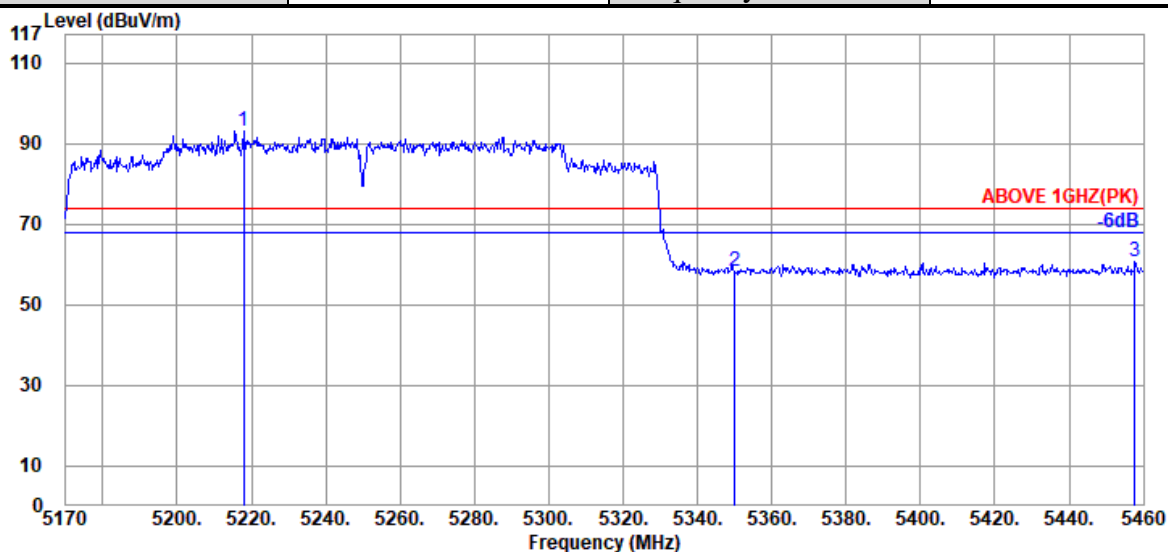

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5217.850	34.40	8.98	39.28	88.84	92.94	---	---	Peak
5350.090	34.80	9.10	39.27	53.57	58.20	74.00	15.80	Peak
5457.680	35.00	9.18	39.26	55.77	60.69	74.00	13.31	Peak

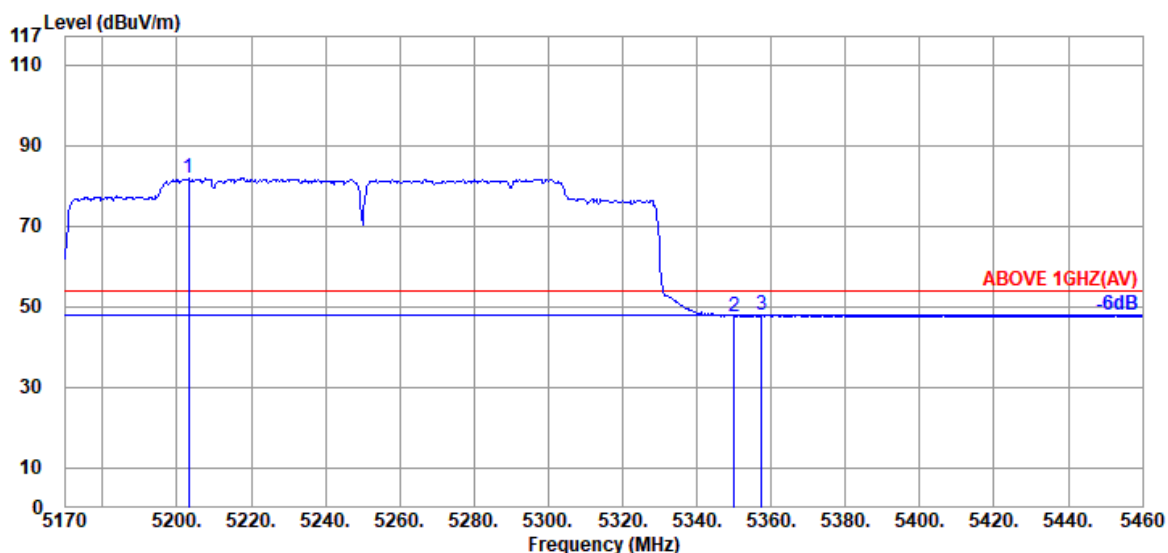


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5203.060	34.40	8.96	39.28	77.70	81.78	---	---	Average
5350.090	34.80	9.10	39.27	43.09	47.72	54.00	6.28	Average
5357.340	34.87	9.10	39.27	43.25	47.95	54.00	6.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

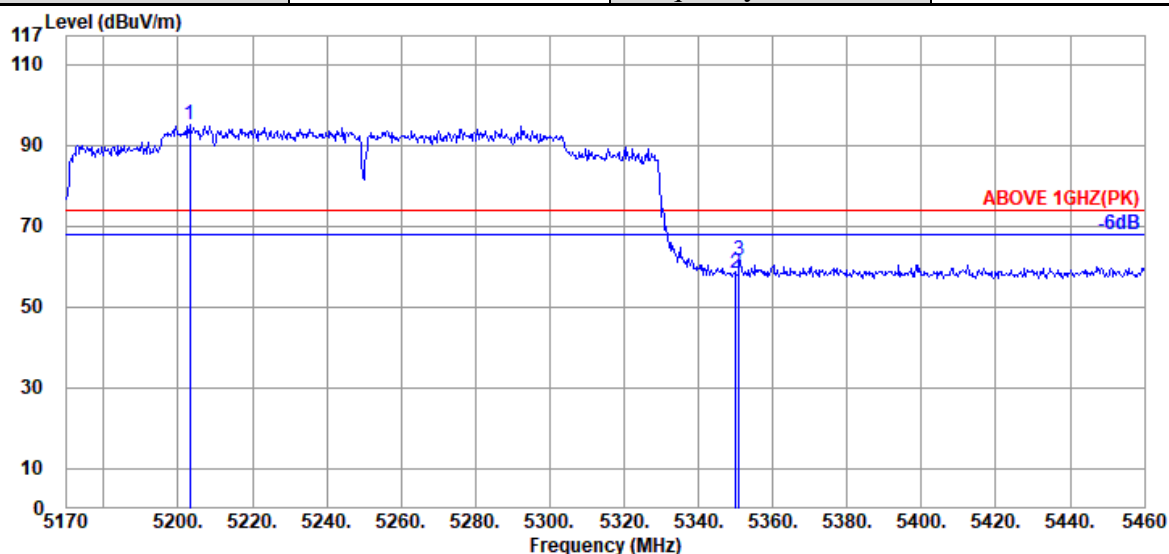

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5203.060	34.40	8.96	39.28	90.95	95.03	---	---	Peak
5350.090	34.80	9.10	39.27	53.71	58.34	74.00	15.66	Peak
5350.960	34.80	9.10	39.27	56.77	61.40	74.00	12.60	Peak

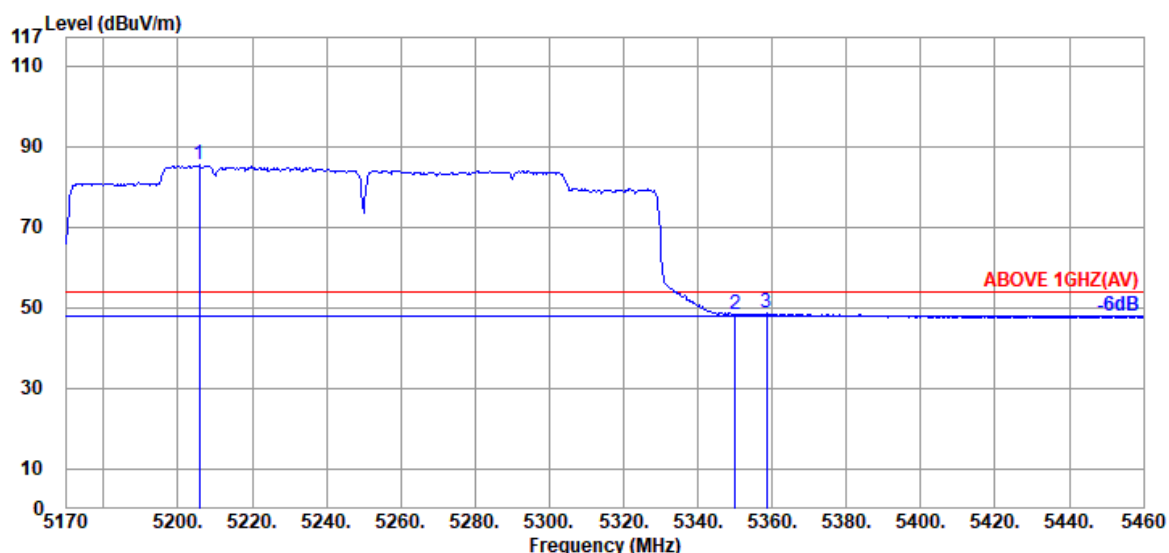


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5205.670	34.40	8.96	39.28	81.31	85.39	---	---	Average
5350.090	34.80	9.10	39.27	43.82	48.45	54.00	5.55	Average
5358.500	34.87	9.10	39.27	43.87	48.57	54.00	5.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

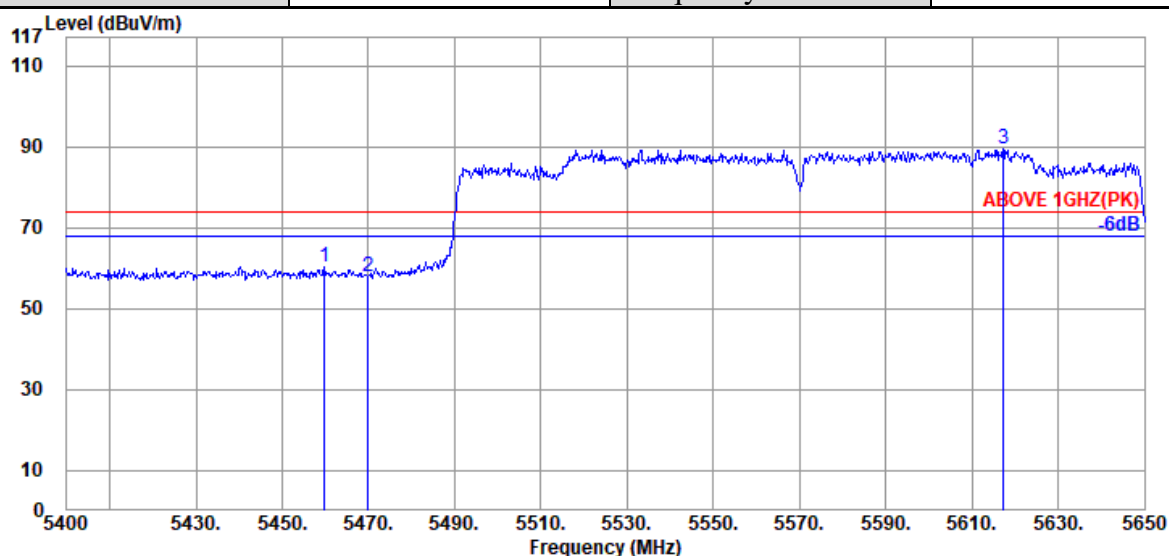

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	35.00	9.18	39.26	55.26	60.18	74.00	13.82	Peak
5470.000	34.97	9.20	39.26	52.96	57.87	74.00	16.13	Peak
@ 5617.250	34.70	9.33	39.28	84.55	89.30	---	---	Peak

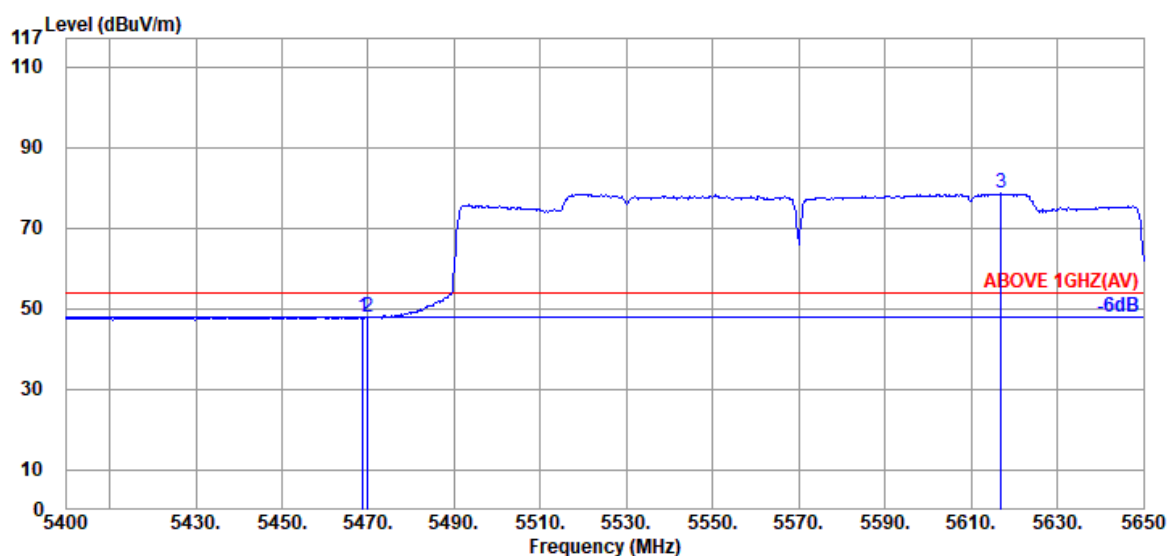


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.97	9.20	39.26	43.00	47.91	54.00	6.09	Average
5470.000	34.97	9.20	39.26	42.86	47.77	54.00	6.23	Average
@ 5617.000	34.70	9.33	39.28	73.76	78.51	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

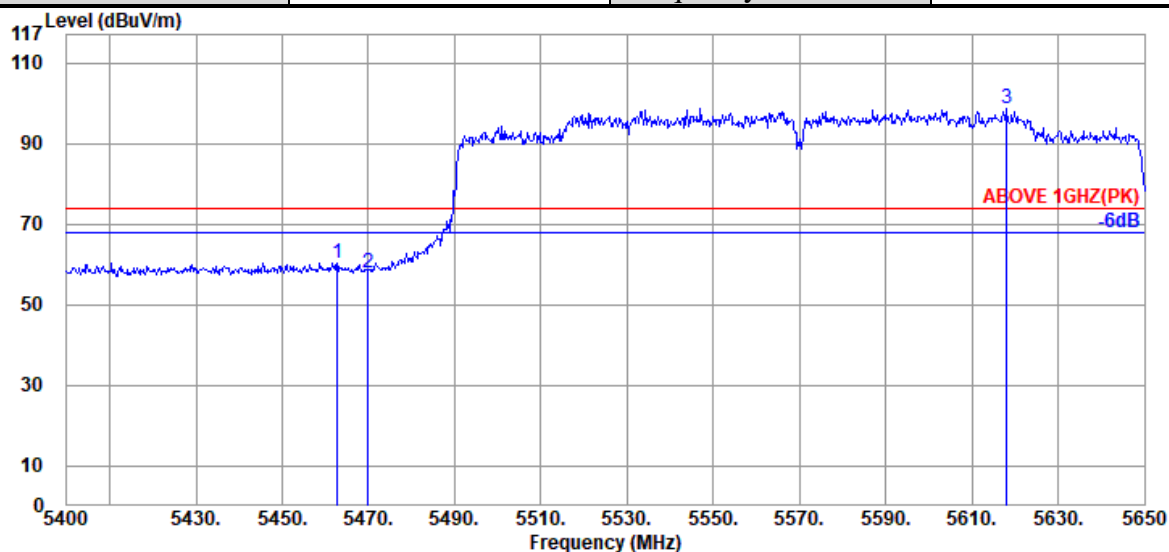

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.750	35.00	9.20	39.26	55.43	60.37	74.00	13.63	Peak
5470.000	34.97	9.20	39.26	53.06	57.97	74.00	16.03	Peak
@ 5618.000	34.70	9.33	39.28	93.91	98.66	---	---	Peak

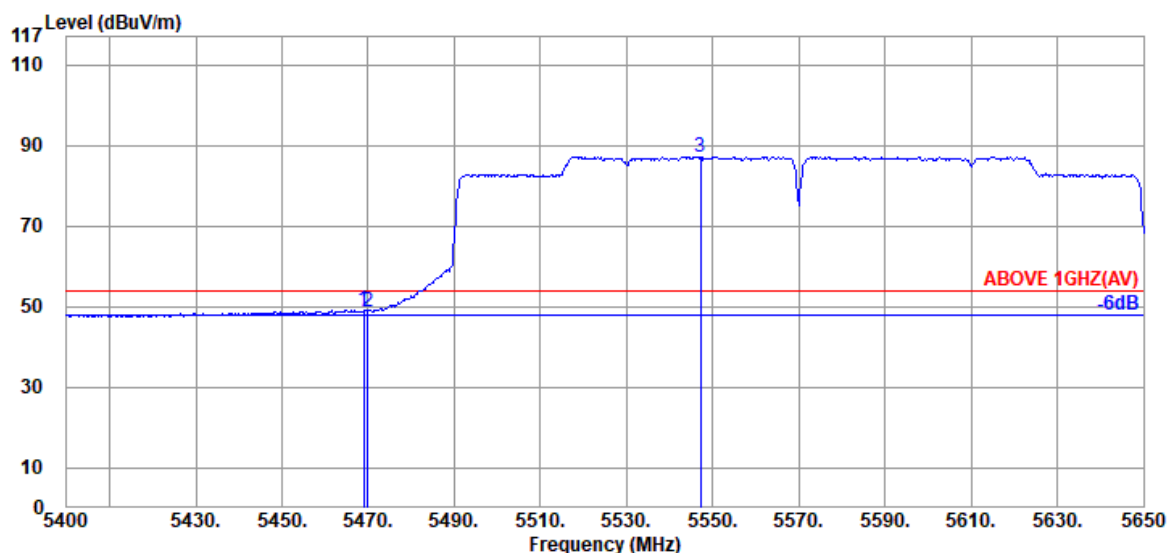


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.97	9.20	39.26	44.09	49.00	54.00	5.00	Average
5470.000	34.97	9.20	39.26	43.97	48.88	54.00	5.12	Average
@ 5547.250	34.80	9.26	39.27	82.39	87.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

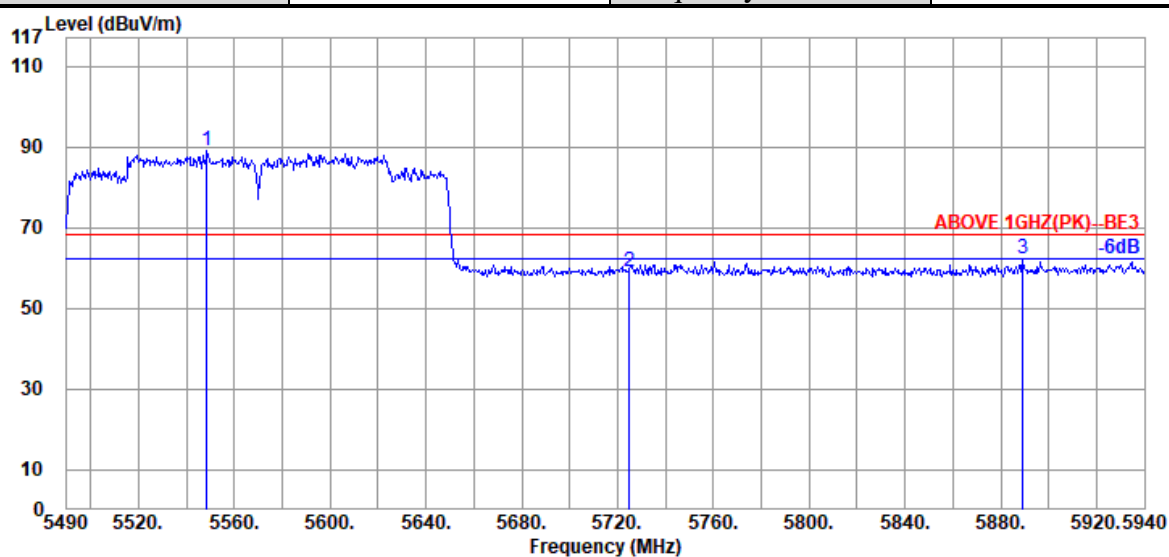

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5548.500	34.80	9.27	39.27	84.12	88.92	---	---	Peak
	5724.900	34.57	9.42	39.30	54.22	58.91	68.20	9.29	Peak
	5889.150	34.60	9.56	39.33	57.50	62.33	68.20	5.87	Peak

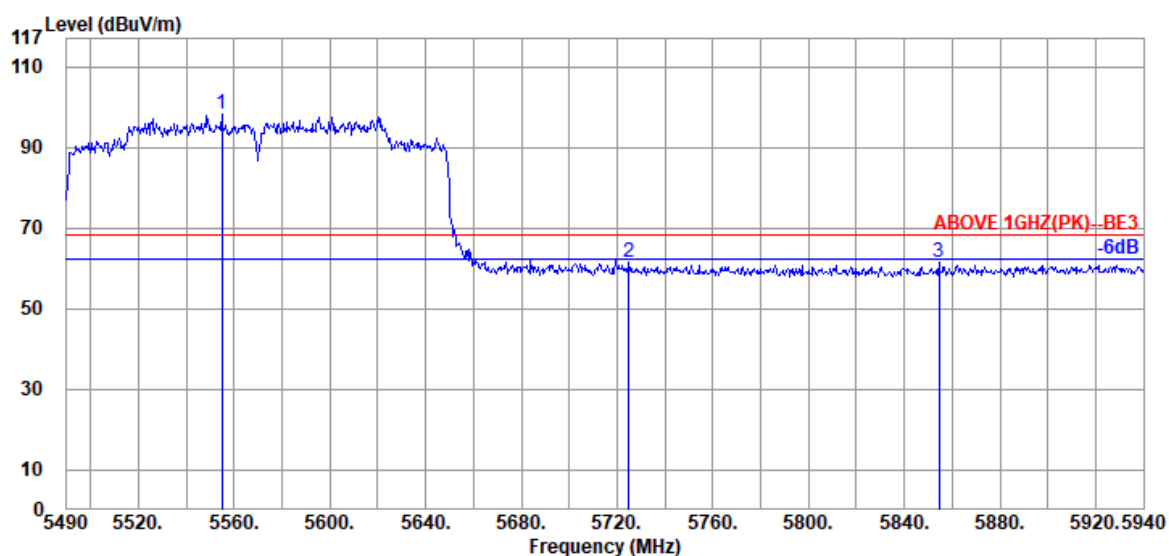

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5554.800	34.80	9.27	39.27	93.49	98.29	---	---	Peak
	5724.900	34.57	9.42	39.30	56.89	61.58	68.20	6.62	Peak
	5854.500	34.60	9.53	39.32	56.59	61.40	68.20	6.80	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

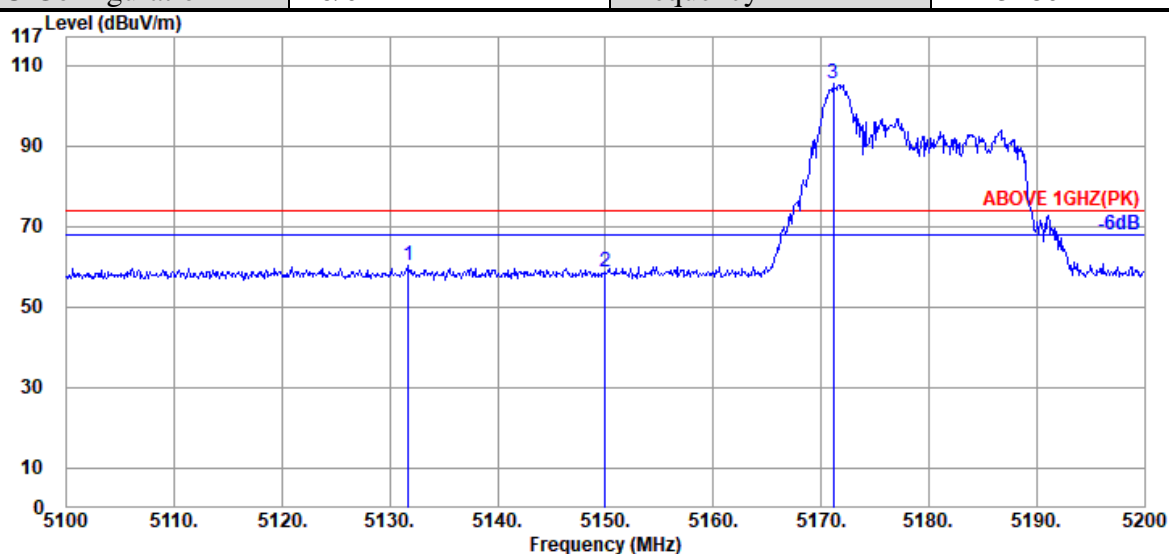

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.700	34.13	8.91	39.29	56.39	60.14	74.00	13.86	Peak
5150.000	34.20	8.92	39.29	54.88	58.71	74.00	15.29	Peak
@ 5171.100	34.27	8.94	39.29	101.46	105.38	---	---	Peak

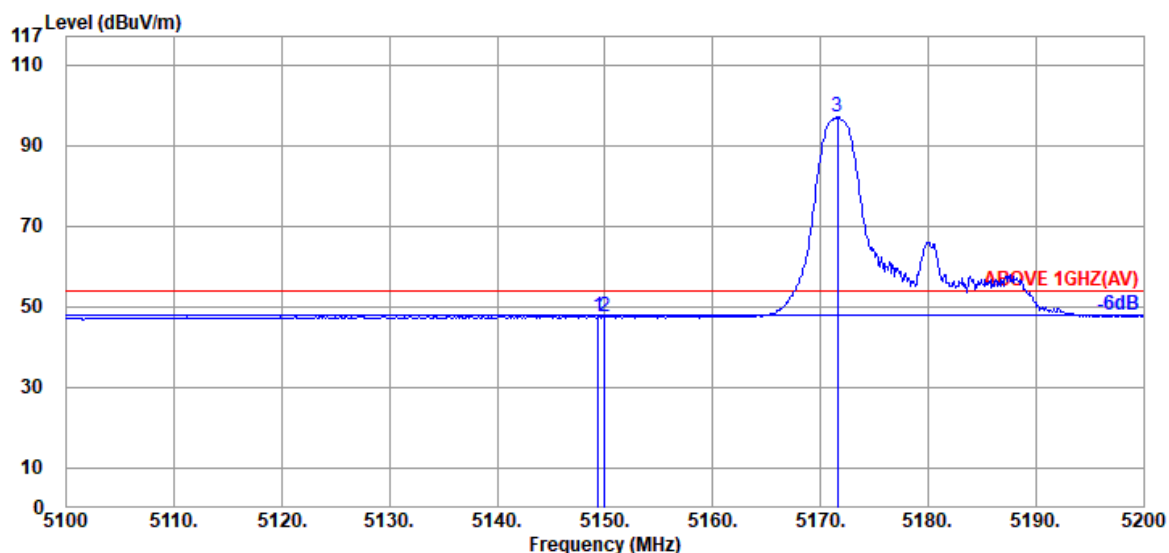

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	8.92	39.29	43.78	47.61	54.00	6.39	Average
5150.000	34.20	8.92	39.29	43.52	47.35	54.00	6.65	Average
@ 5171.600	34.33	8.94	39.29	92.94	96.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

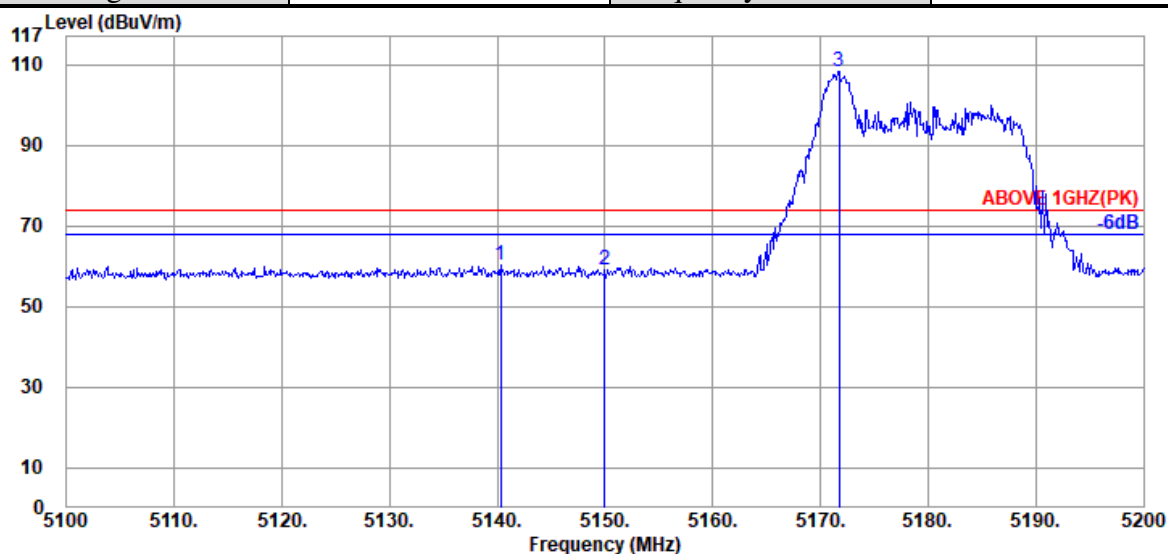

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5140.300	34.13	8.92	39.29	56.40	60.16	74.00	13.84	Peak
5150.000	34.20	8.92	39.29	55.20	59.03	74.00	14.97	Peak
@ 5171.700	34.33	8.94	39.29	104.16	108.14	---	---	Peak

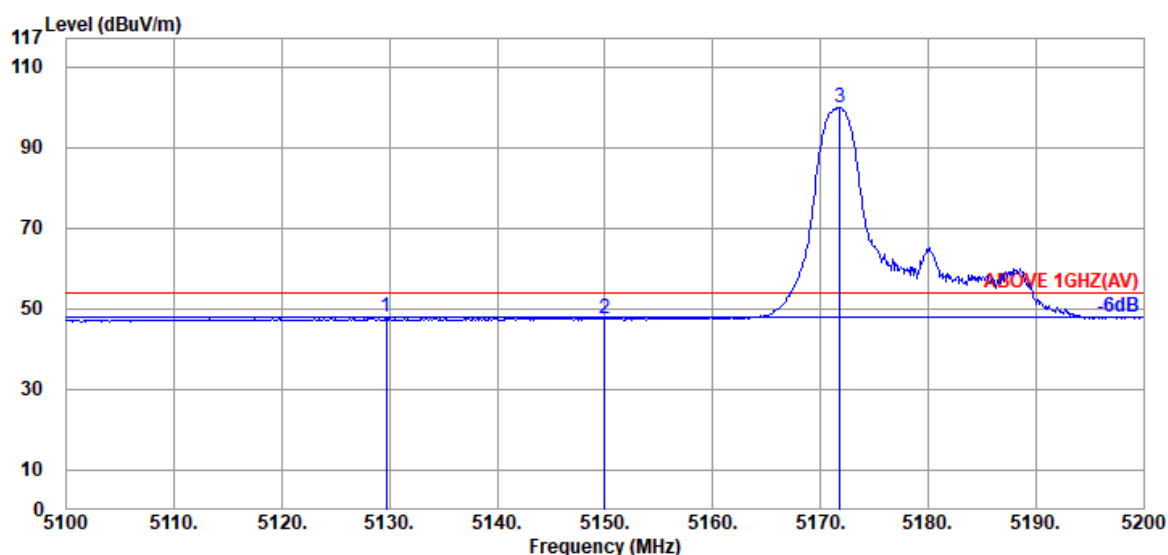

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5129.700	34.13	8.91	39.29	43.98	47.73	54.00	6.27	Average
5150.000	34.20	8.92	39.29	43.62	47.45	54.00	6.55	Average
@ 5171.800	34.33	8.94	39.29	95.95	99.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

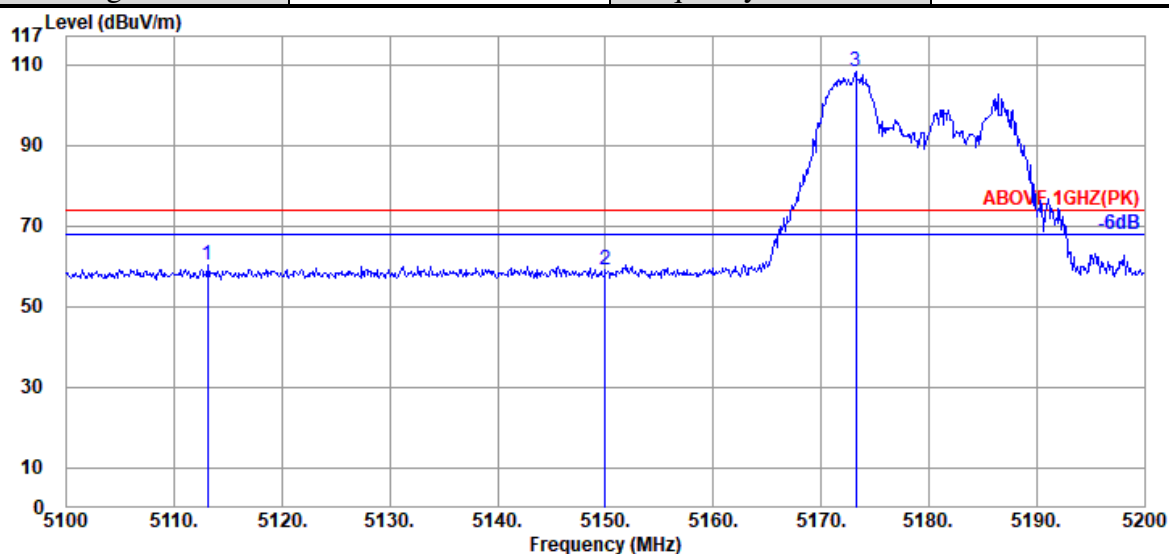

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5113.100	34.07	8.89	39.29	56.43	60.10	74.00	13.90	Peak
5150.000	34.20	8.92	39.29	55.21	59.04	74.00	14.96	Peak
@ 5173.200	34.33	8.94	39.28	104.24	108.23	---	---	Peak

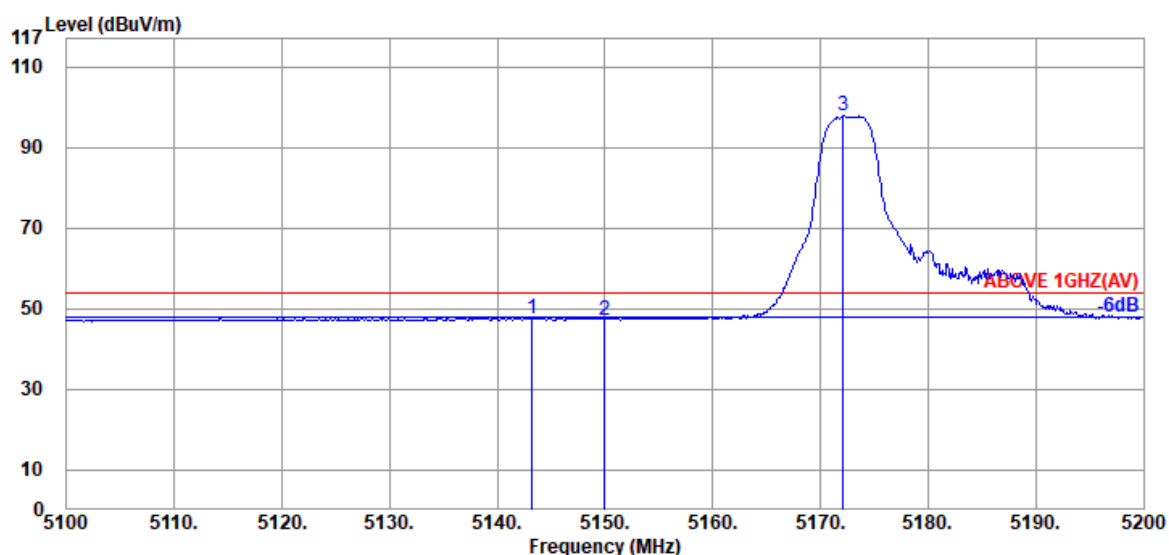

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5143.200	34.20	8.92	39.29	43.81	47.64	54.00	6.36	Average
5150.000	34.20	8.92	39.29	43.48	47.31	54.00	6.69	Average
@ 5172.100	34.33	8.94	39.29	93.72	97.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

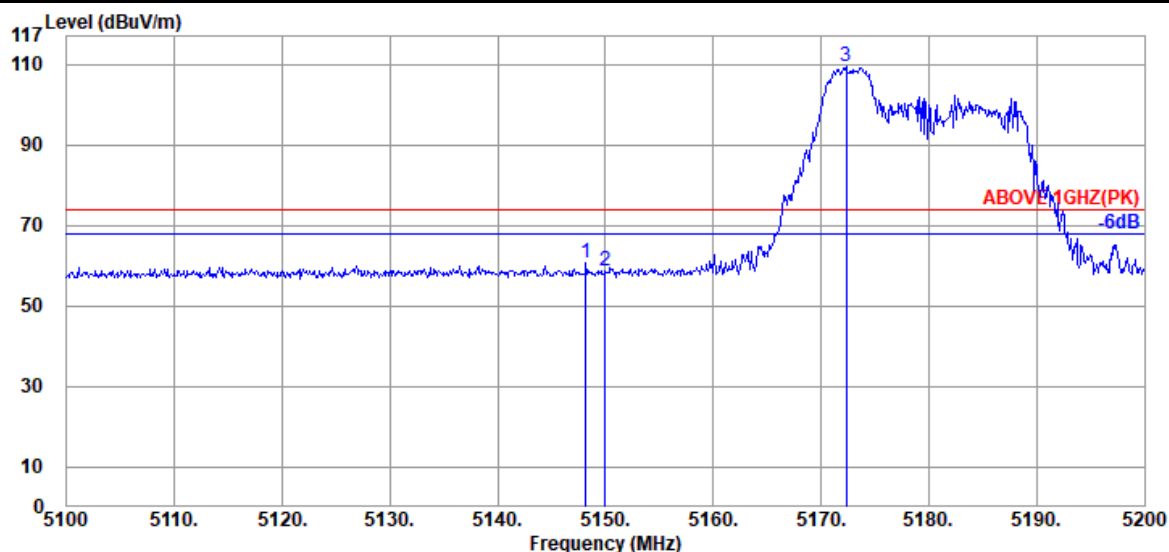

Antenna at Vertical Polarization

Antenna at Vertical Polarization								
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
5148.200	34.20	8.92	39.29	56.85	60.68	74.00	13.32	Peak
5150.000	34.20	8.92	39.29	54.74	58.57	74.00	15.43	Peak
@ 5172.300	34.33	8.94	39.29	105.31	109.29	---	---	Peak

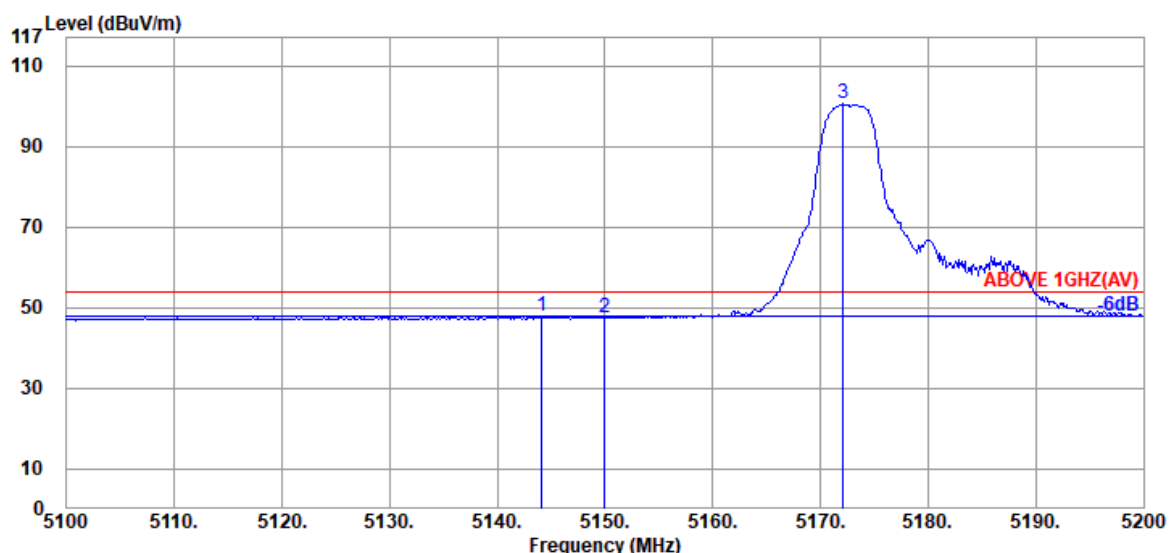

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
	5144.100	34.20	8.92	39.29	43.96	47.79	54.00	6.21	Average
	5150.000	34.20	8.92	39.29	43.69	47.52	54.00	6.48	Average
@	5172.100	34.33	8.94	39.29	96.50	100.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2204124


Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

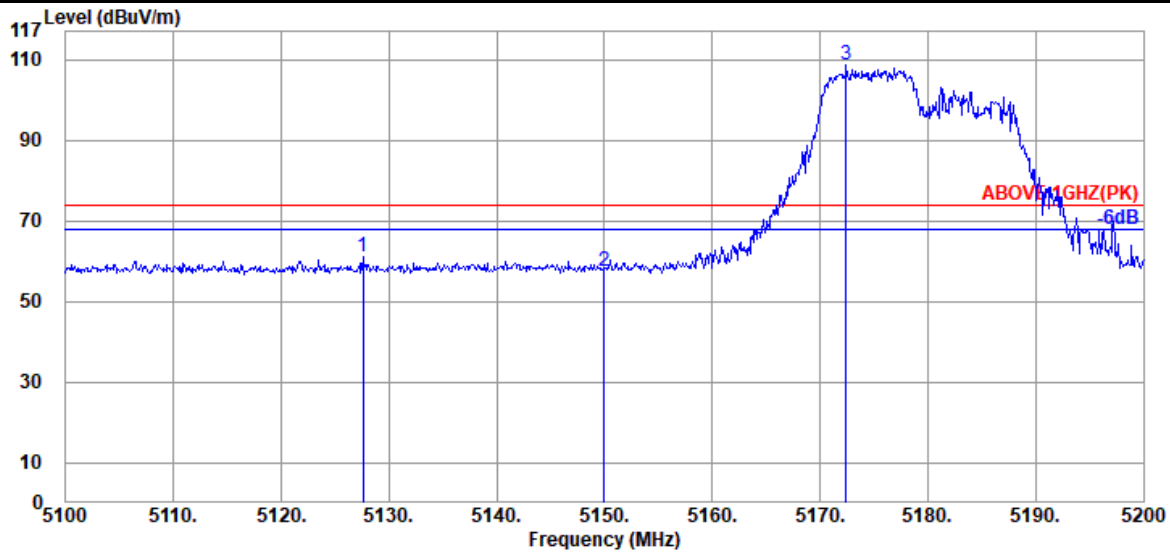

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.600	34.13	8.91	39.29	57.39	61.14	74.00	12.86	Peak
5150.000	34.20	8.92	39.29	53.71	57.54	74.00	16.46	Peak
@ 5172.400	34.33	8.94	39.29	104.55	108.53	---	---	Peak

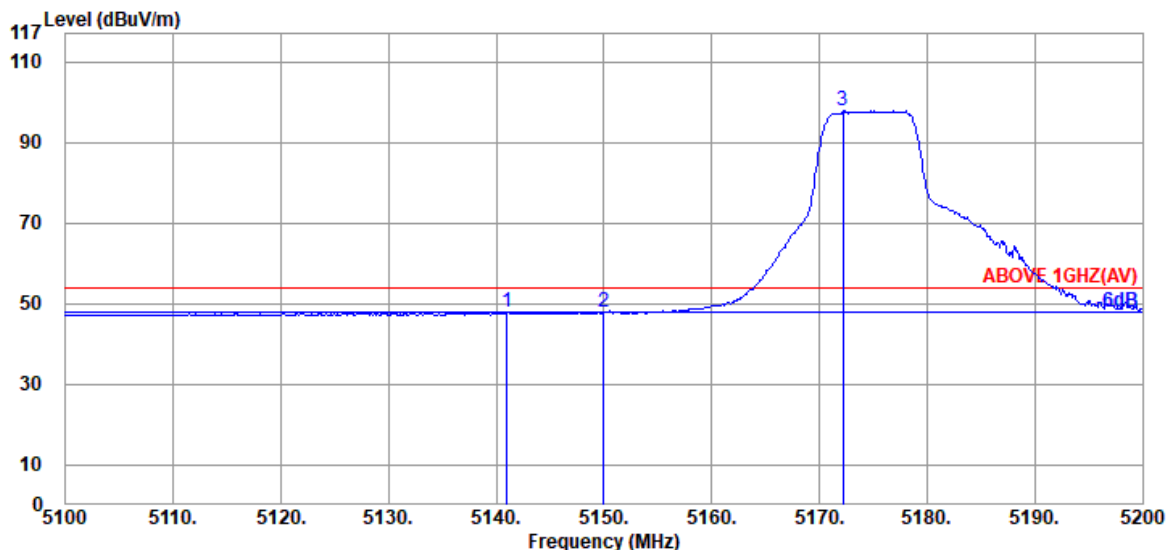

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.000	34.13	8.92	39.29	44.06	47.82	54.00	6.18	Average
5150.000	34.20	8.92	39.29	44.06	47.89	54.00	6.11	Average
@ 5172.200	34.33	8.94	39.29	93.73	97.71	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

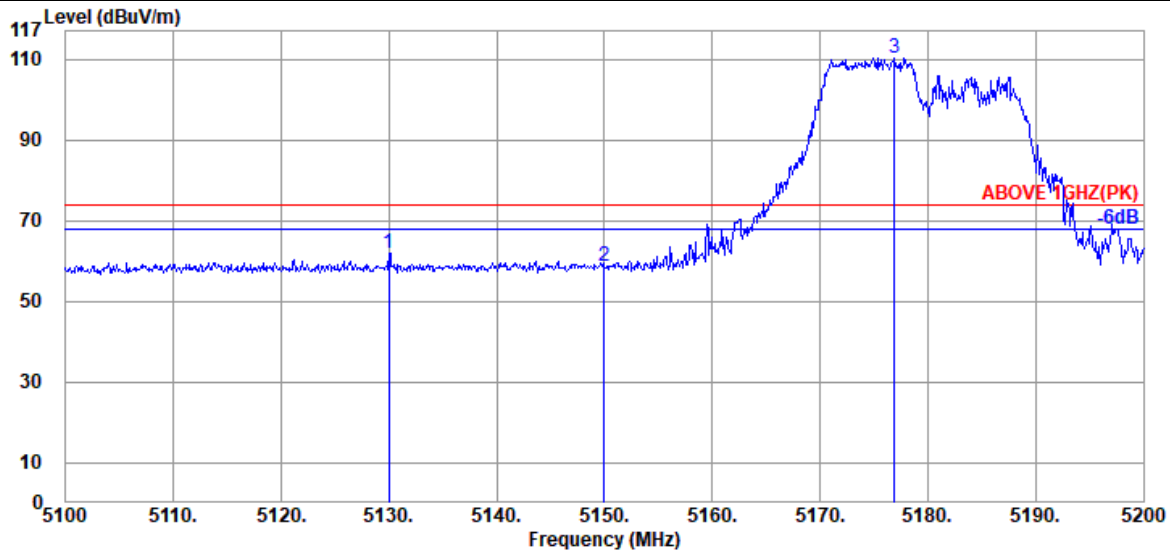

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5130.000	34.13	8.91	39.29	58.30	62.05	74.00	11.95	Peak
5150.000	34.20	8.92	39.29	54.87	58.70	74.00	15.30	Peak
@ 5176.900	34.33	8.95	39.28	106.36	110.36	---	---	Peak

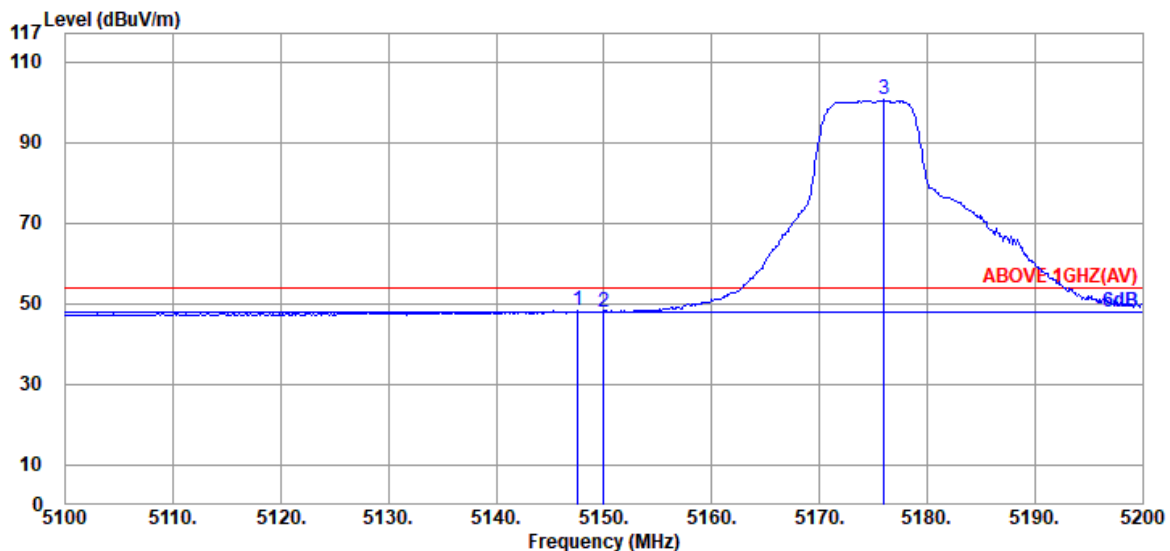

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.600	34.20	8.92	39.29	44.33	48.16	54.00	5.84	Average
5150.000	34.20	8.92	39.29	44.12	47.95	54.00	6.05	Average
@ 5176.000	34.33	8.95	39.28	96.49	100.49	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

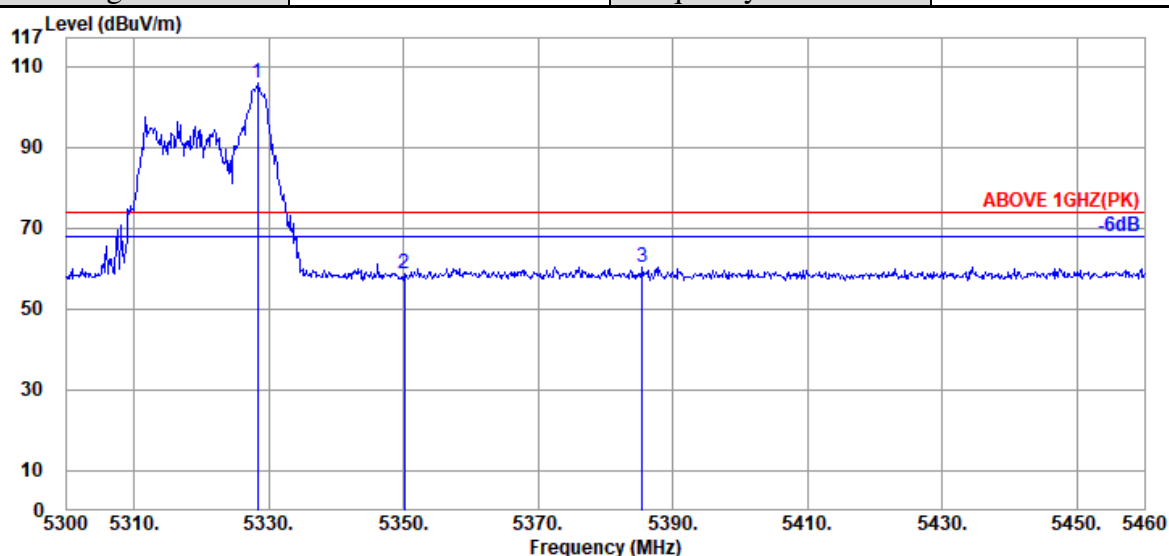

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.70	9.08	39.27	101.32	105.83	---	---	Peak
5350.080	34.80	9.10	39.27	54.16	58.79	74.00	15.21	Peak
5385.440	35.00	9.13	39.27	55.44	60.30	74.00	13.70	Peak

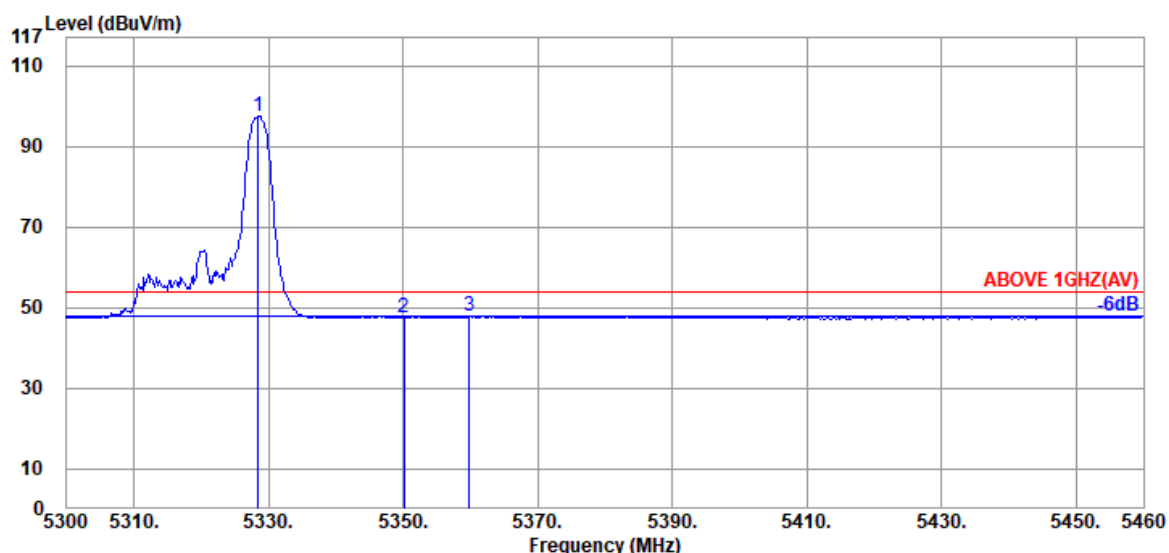

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.70	9.08	39.27	93.01	97.52	---	---	Average
5350.080	34.80	9.10	39.27	43.02	47.65	54.00	6.35	Average
5359.840	34.87	9.10	39.27	43.21	47.91	54.00	6.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

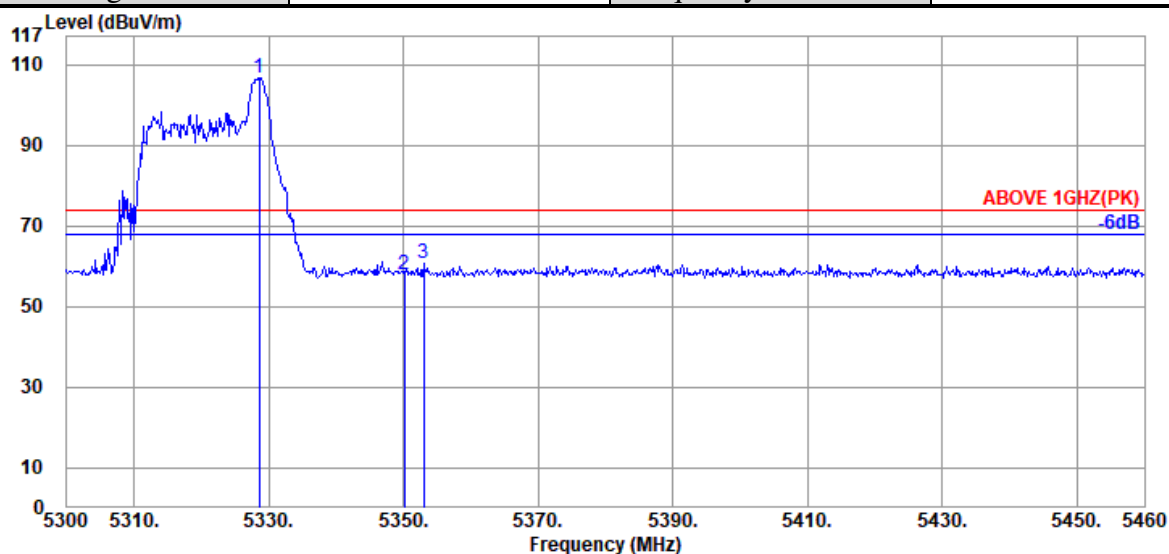

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.70	9.08	39.27	102.23	106.74	---	---	Peak
5350.080	34.80	9.10	39.27	53.44	58.07	74.00	15.93	Peak
5352.960	34.80	9.10	39.27	55.93	60.56	74.00	13.44	Peak

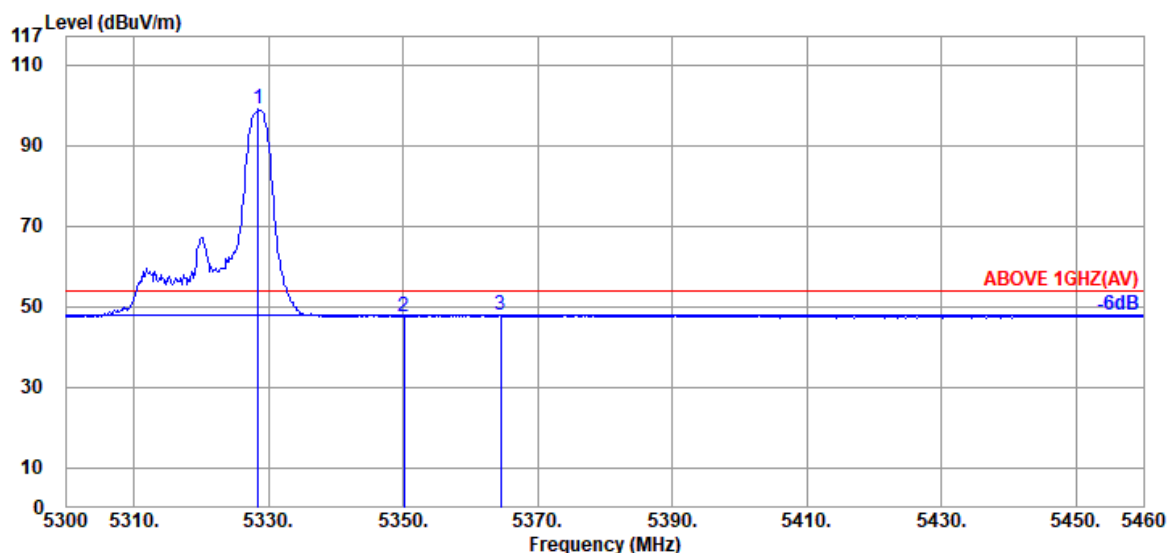

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.70	9.08	39.27	94.33	98.84	---	---	Average
5350.080	34.80	9.10	39.27	42.90	47.53	54.00	6.47	Average
5364.480	34.87	9.11	39.27	43.19	47.90	54.00	6.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

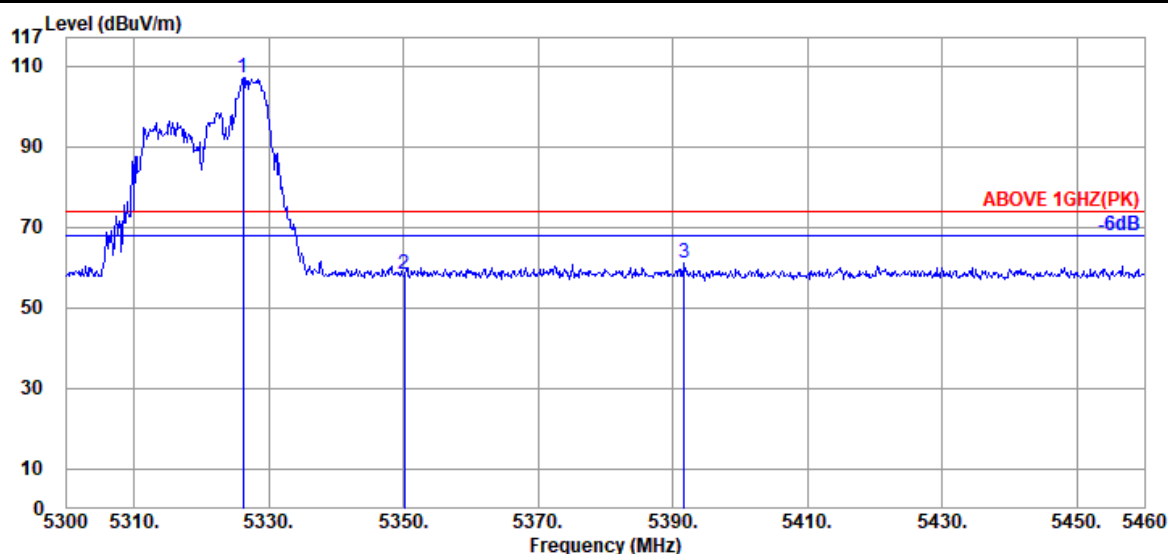

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.240	34.70	9.07	39.27	102.68	107.18	---	---	Peak
5350.080	34.80	9.10	39.27	53.59	58.22	74.00	15.78	Peak
5391.680	35.00	9.13	39.27	56.25	61.11	74.00	12.89	Peak

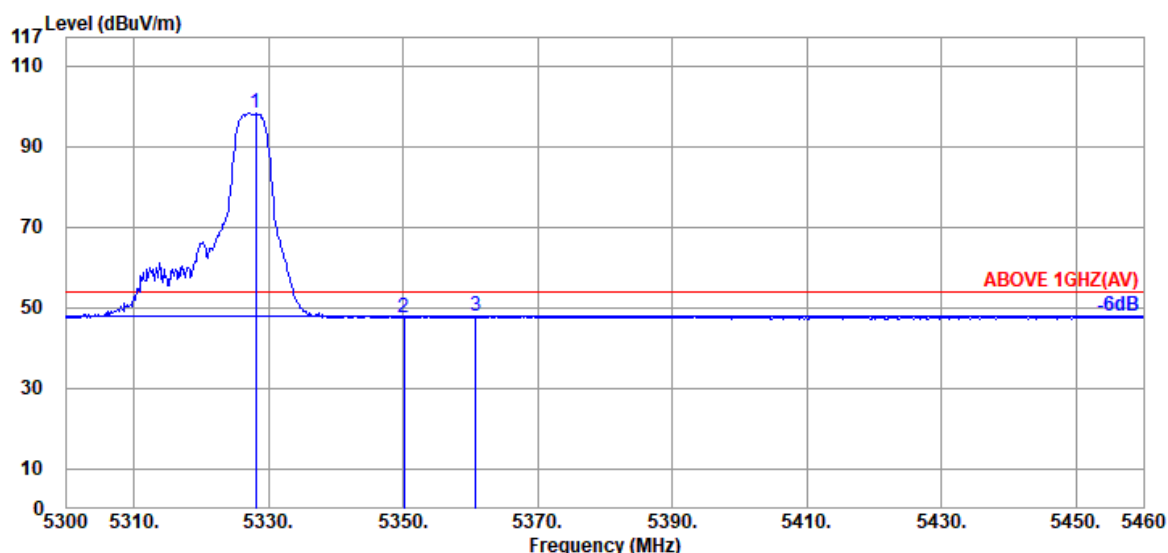

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.70	9.08	39.27	93.66	98.17	---	---	Average
5350.080	34.80	9.10	39.27	43.04	47.67	54.00	6.33	Average
5360.800	34.87	9.11	39.27	43.19	47.90	54.00	6.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

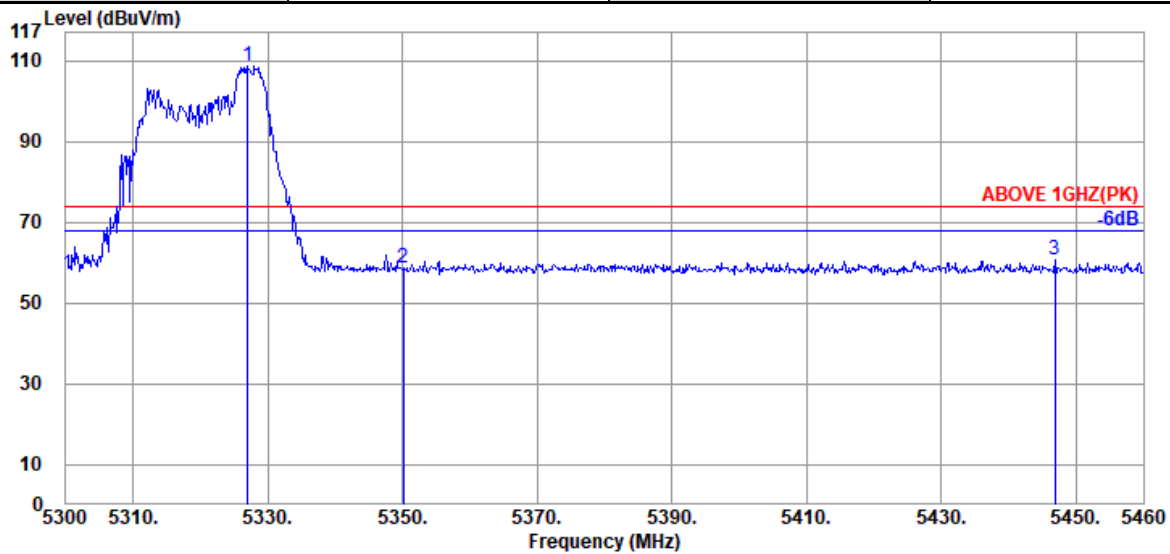

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.040	34.70	9.08	39.27	104.30	108.81	---	---	Peak
5350.080	34.80	9.10	39.27	53.87	58.50	74.00	15.50	Peak
5446.880	35.00	9.18	39.26	55.62	60.54	74.00	13.46	Peak

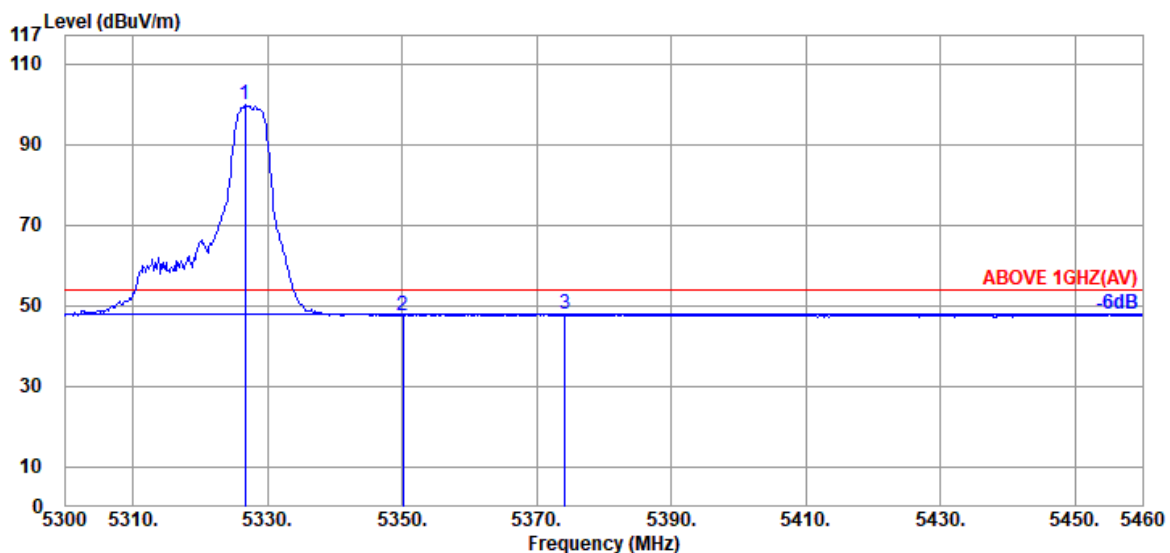

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.720	34.70	9.08	39.27	95.22	99.73	---	---	Average
5350.080	34.80	9.10	39.27	43.00	47.63	54.00	6.37	Average
5374.240	34.93	9.11	39.27	43.18	47.95	54.00	6.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

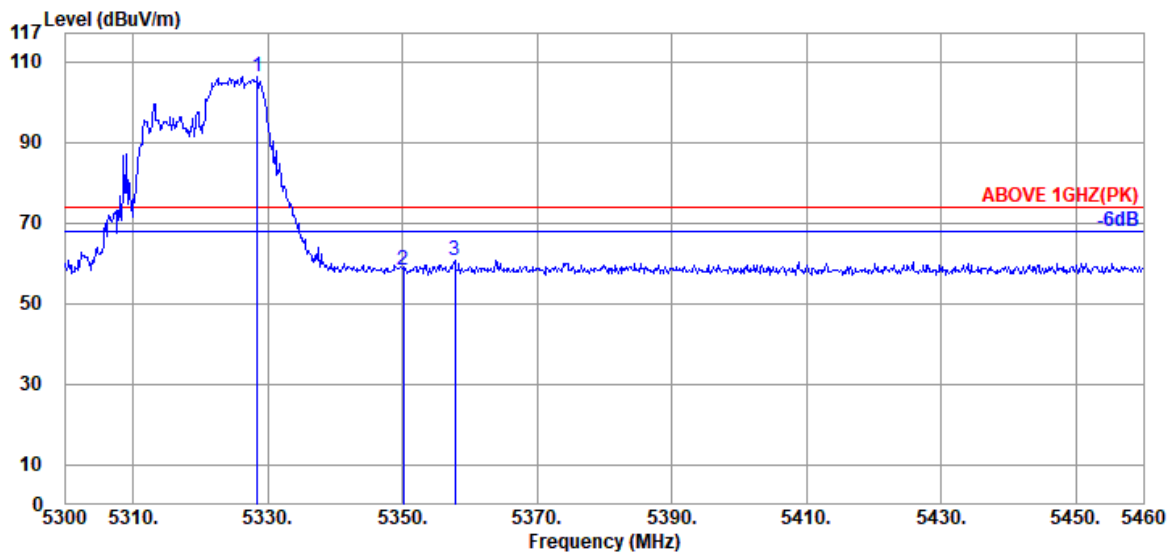

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.70	9.08	39.27	101.79	106.30	---	---	Peak
5350.080	34.80	9.10	39.27	53.61	58.24	74.00	15.76	Peak
5357.760	34.87	9.10	39.27	55.94	60.64	74.00	13.36	Peak

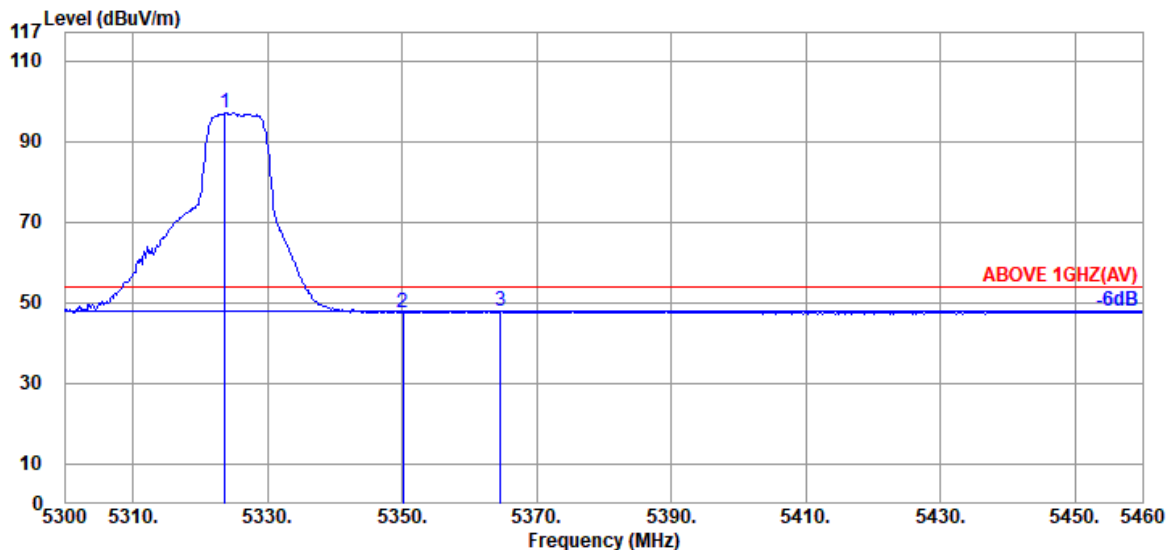

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.70	9.07	39.27	92.67	97.17	---	---	Average
5350.080	34.80	9.10	39.27	42.99	47.62	54.00	6.38	Average
5364.640	34.87	9.11	39.27	43.16	47.87	54.00	6.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

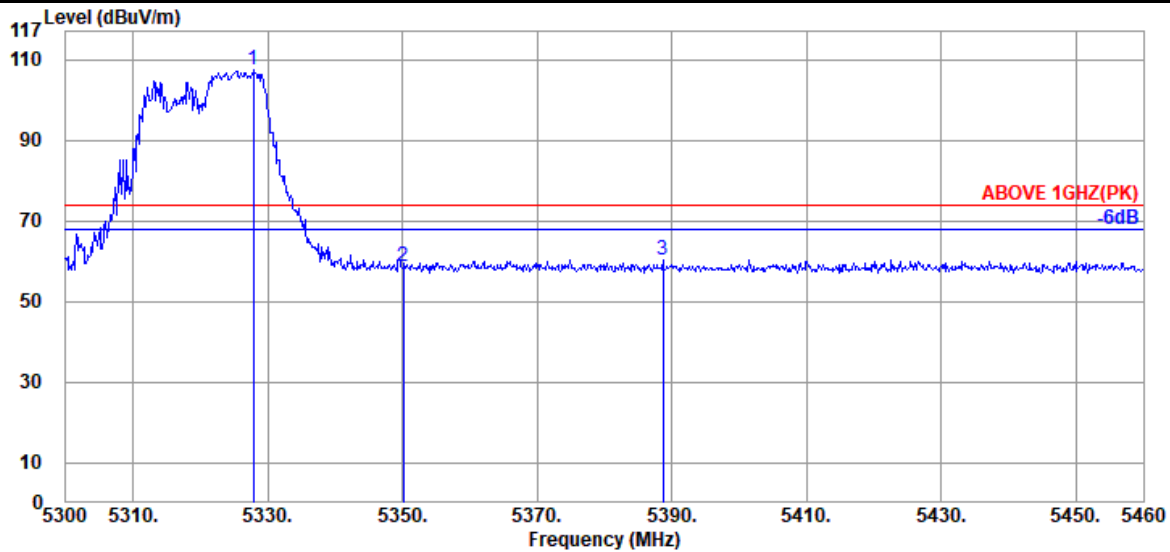

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.840	34.70	9.08	39.27	102.81	107.32	---	---	Peak
5350.080	34.80	9.10	39.27	54.07	58.70	74.00	15.30	Peak
5388.640	35.00	9.13	39.27	55.62	60.48	74.00	13.52	Peak

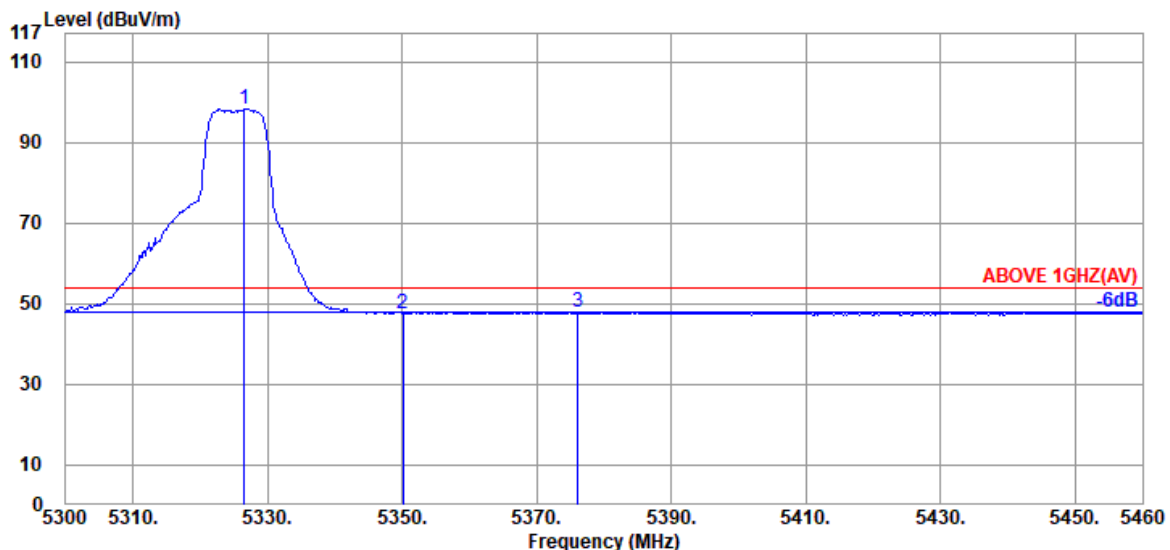

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.560	34.70	9.08	39.27	93.76	98.27	---	---	Average
5350.080	34.80	9.10	39.27	43.04	47.67	54.00	6.33	Average
5376.160	34.93	9.11	39.27	43.23	48.00	54.00	6.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

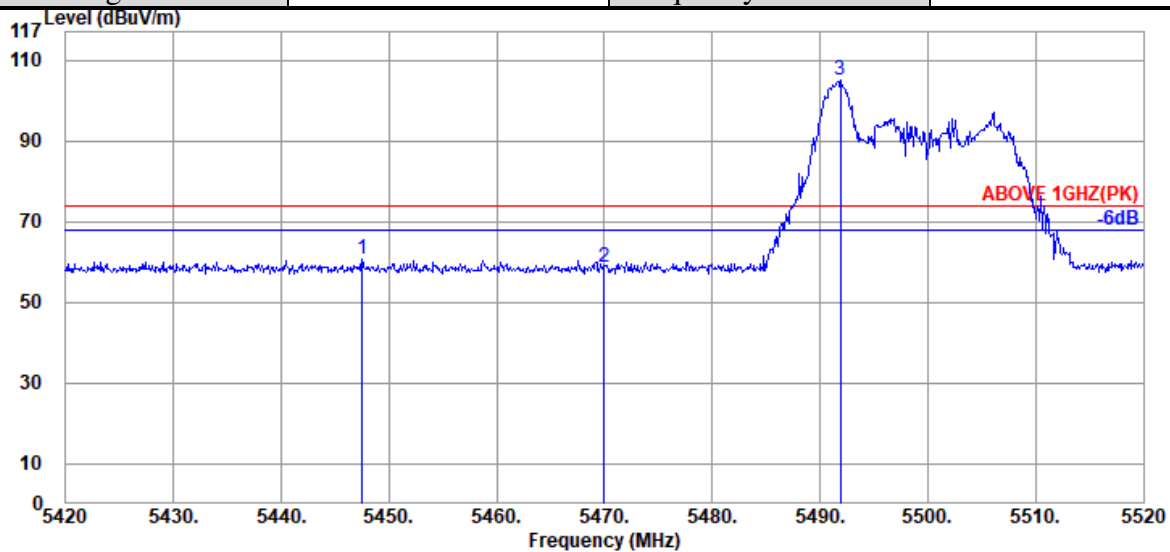

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	35.00	9.18	39.26	55.91	60.83	74.00	13.17	Peak
5470.000	34.97	9.20	39.26	53.75	58.66	74.00	15.34	Peak
@ 5491.900	34.93	9.21	39.26	99.96	104.84	---	---	Peak

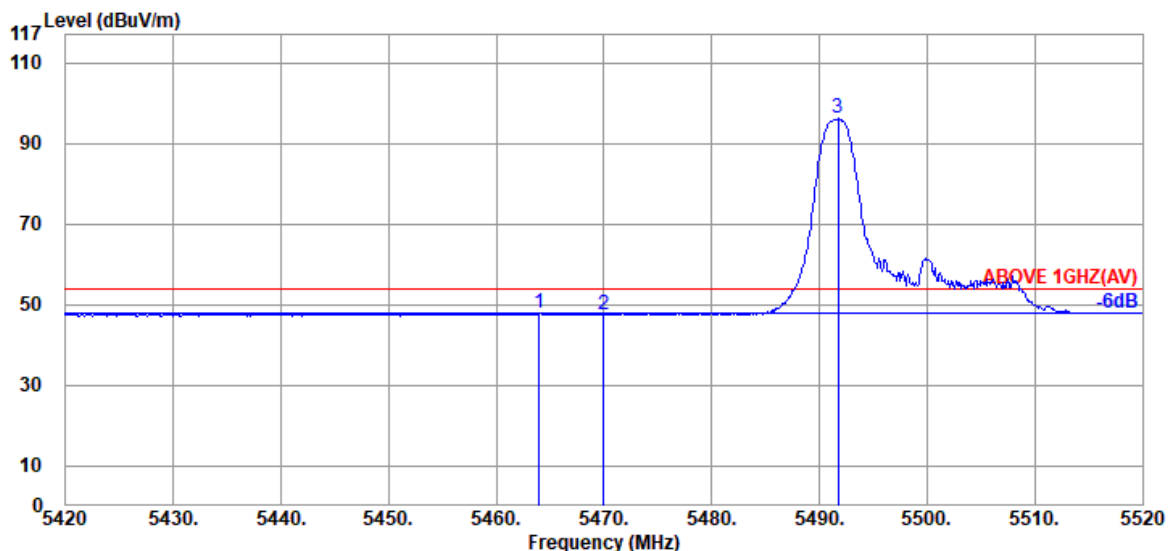

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.97	9.20	39.26	42.85	47.76	54.00	6.24	Average
5470.000	34.97	9.20	39.26	42.54	47.45	54.00	6.55	Average
@ 5491.700	34.93	9.21	39.26	91.43	96.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

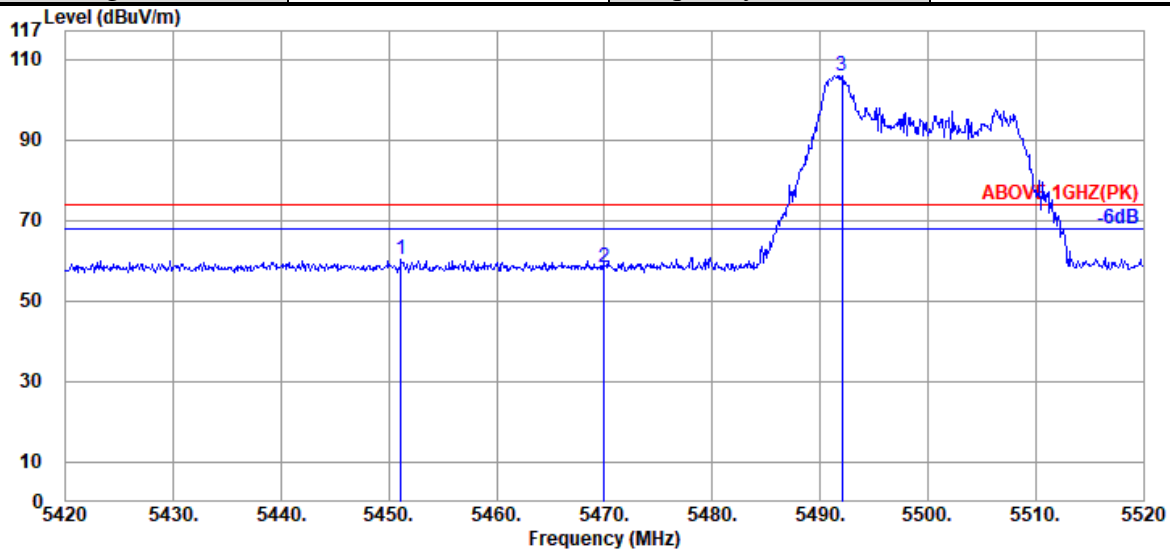

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.100	35.00	9.18	39.26	55.23	60.15	74.00	13.85	Peak
5470.000	34.97	9.20	39.26	53.28	58.19	74.00	15.81	Peak
@ 5492.000	34.93	9.21	39.26	100.99	105.87	---	---	Peak

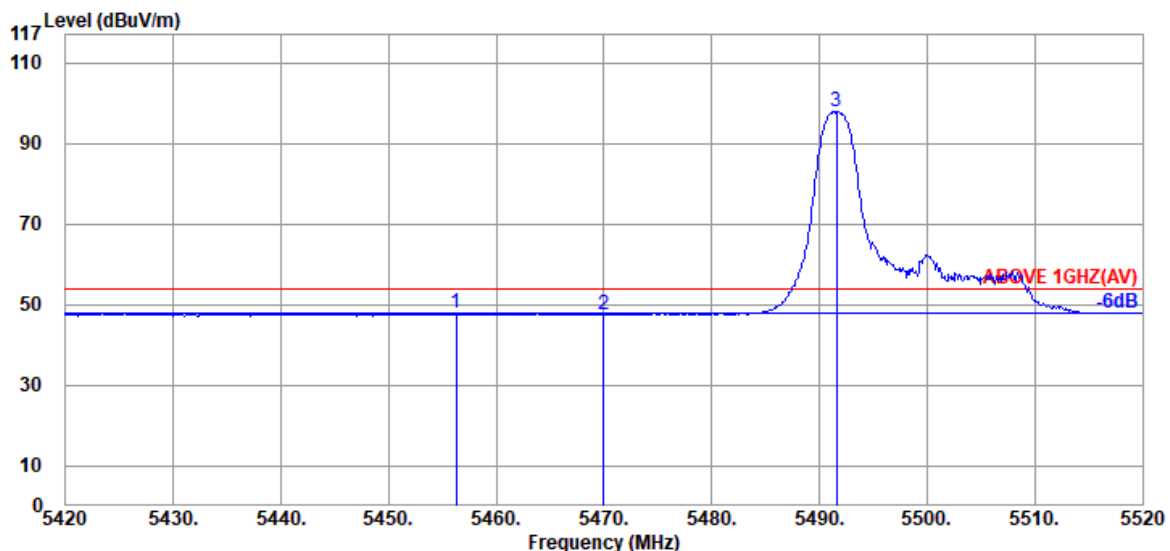

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.300	35.00	9.18	39.26	42.91	47.83	54.00	6.17	Average
5470.000	34.97	9.20	39.26	42.70	47.61	54.00	6.39	Average
@ 5491.600	34.93	9.21	39.26	93.00	97.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

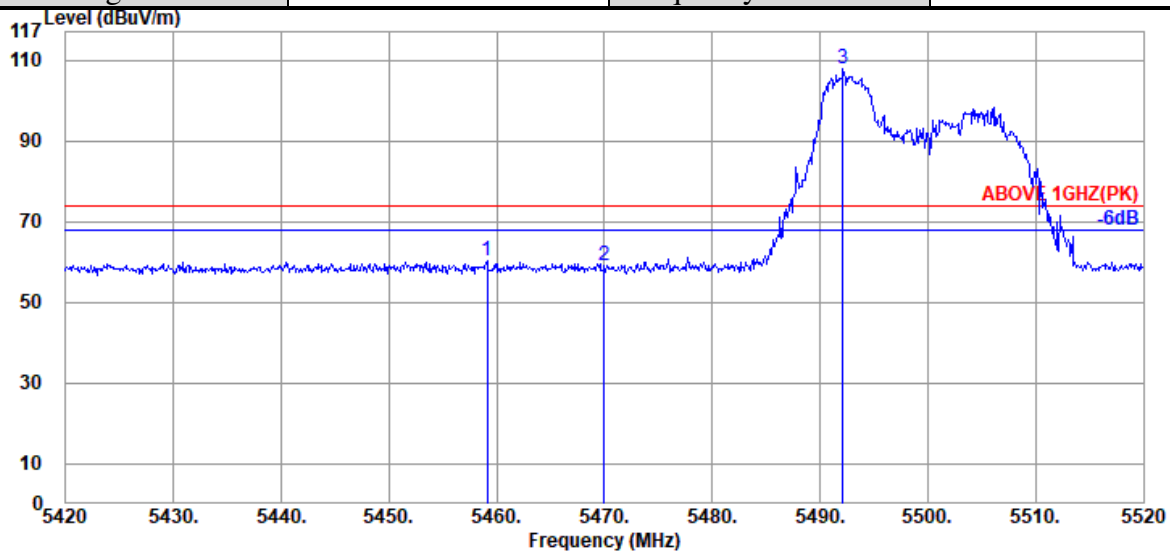

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	35.00	9.18	39.26	55.18	60.10	74.00	13.90	Peak
5470.000	34.97	9.20	39.26	54.01	58.92	74.00	15.08	Peak
@ 5492.100	34.93	9.21	39.26	102.74	107.62	---	---	Peak

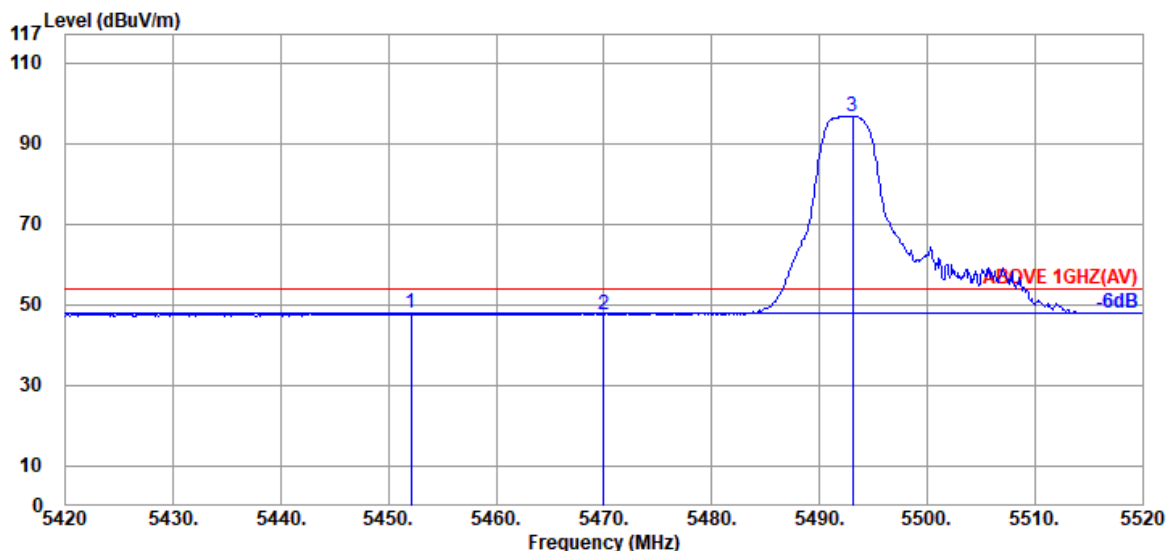

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.100	35.00	9.18	39.26	42.98	47.90	54.00	6.10	Average
5470.000	34.97	9.20	39.26	42.61	47.52	54.00	6.48	Average
@ 5493.100	34.93	9.21	39.26	91.90	96.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

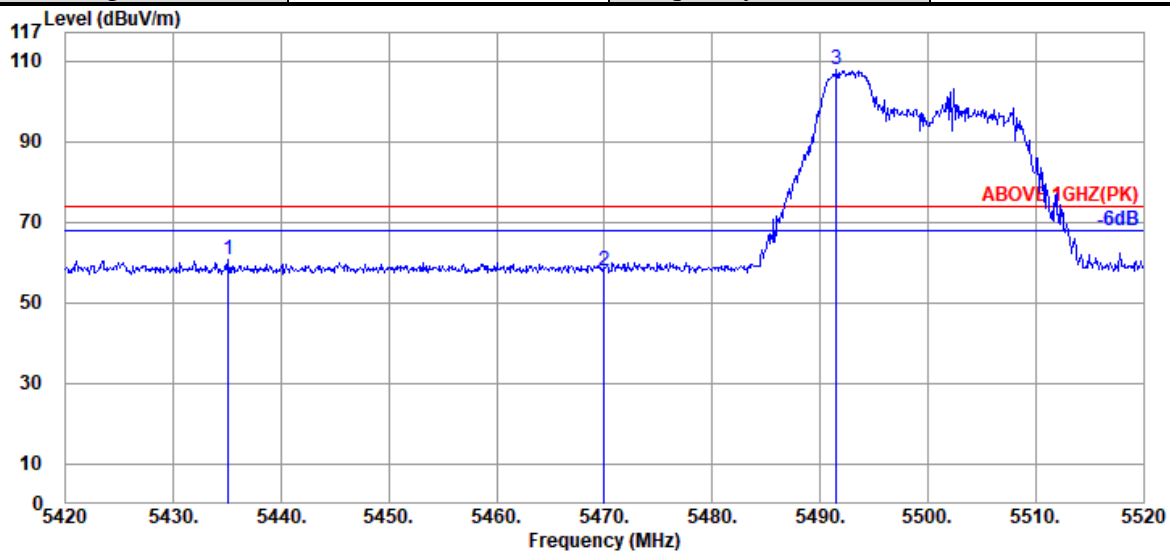

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.100	35.00	9.17	39.26	55.75	60.66	74.00	13.34	Peak
5470.000	34.97	9.20	39.26	53.16	58.07	74.00	15.93	Peak
@ 5491.500	34.93	9.21	39.26	102.96	107.84	---	---	Peak

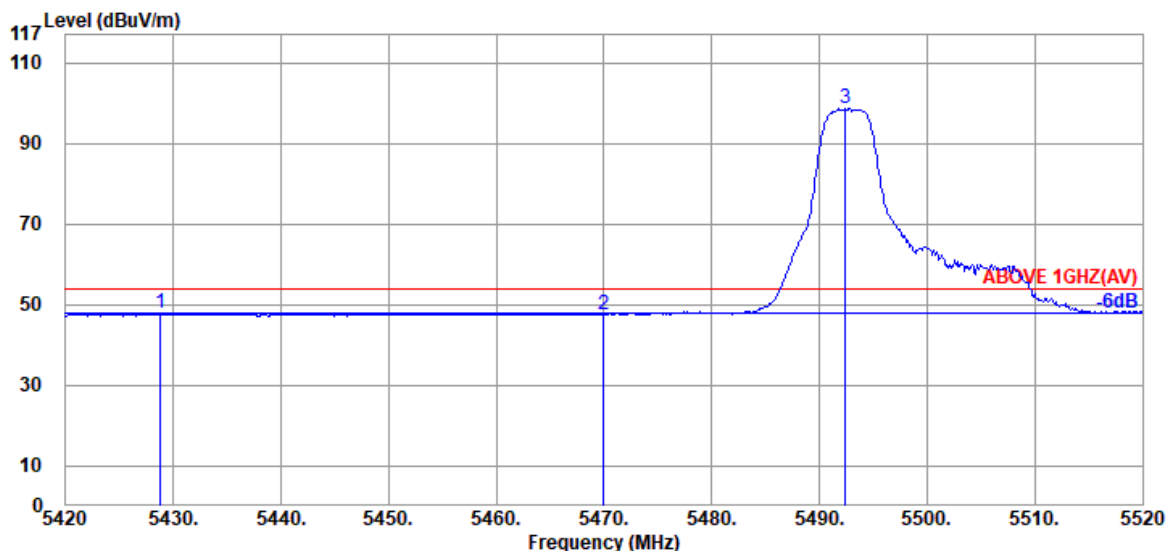

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.800	35.00	9.17	39.27	42.85	47.75	54.00	6.25	Average
5470.000	34.97	9.20	39.26	42.66	47.57	54.00	6.43	Average
@ 5492.400	34.93	9.21	39.26	93.70	98.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

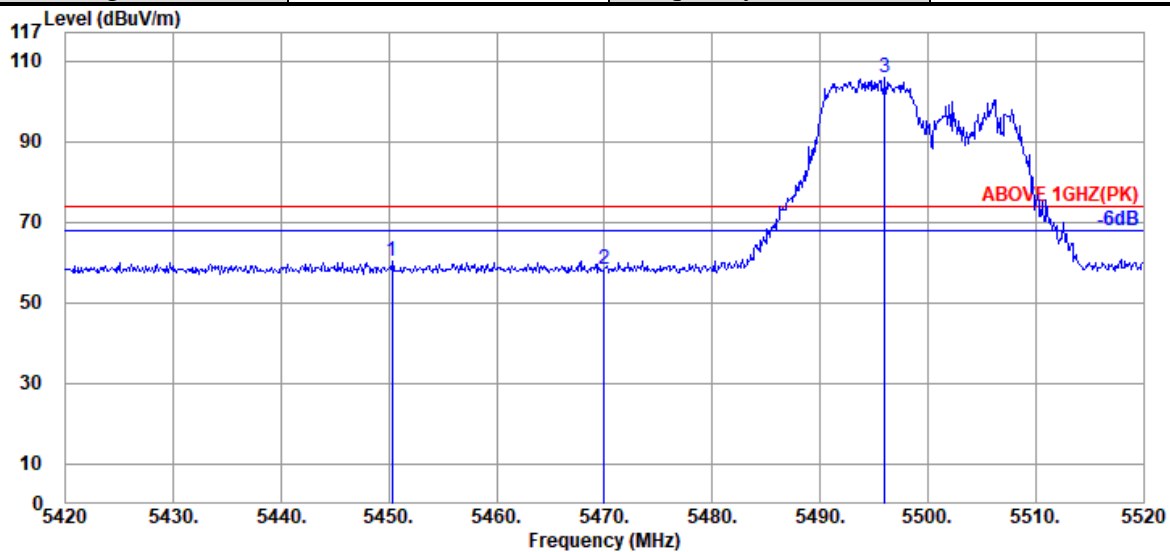

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.300	35.00	9.18	39.26	55.47	60.39	74.00	13.61	Peak
5470.000	34.97	9.20	39.26	53.27	58.18	74.00	15.82	Peak
@ 5496.000	34.90	9.21	39.26	100.80	105.65	---	---	Peak

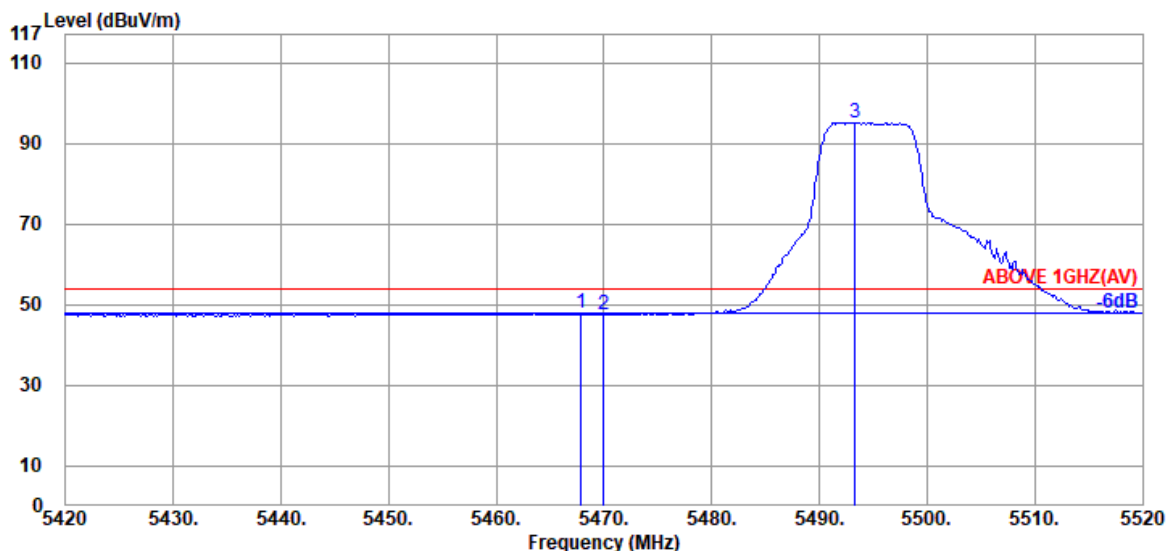

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.900	34.97	9.20	39.26	43.00	47.91	54.00	6.09	Average
5470.000	34.97	9.20	39.26	42.73	47.64	54.00	6.36	Average
@ 5493.300	34.93	9.21	39.26	90.28	95.16	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

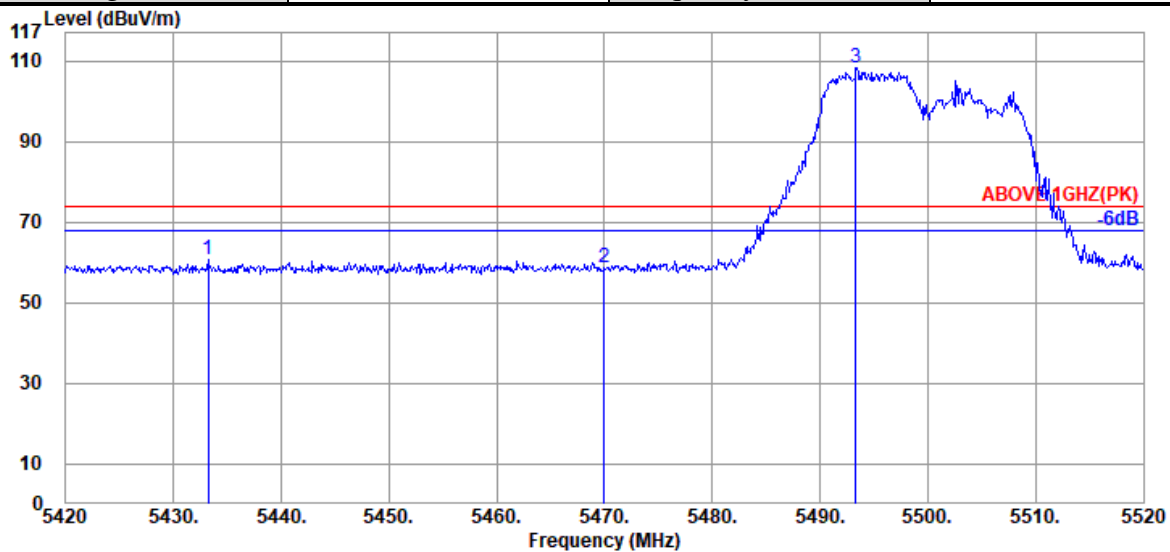

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5433.200	35.00	9.17	39.27	55.78	60.68	74.00	13.32	Peak
5470.000	34.97	9.20	39.26	53.92	58.83	74.00	15.17	Peak
@ 5493.300	34.93	9.21	39.26	103.22	108.10	---	---	Peak

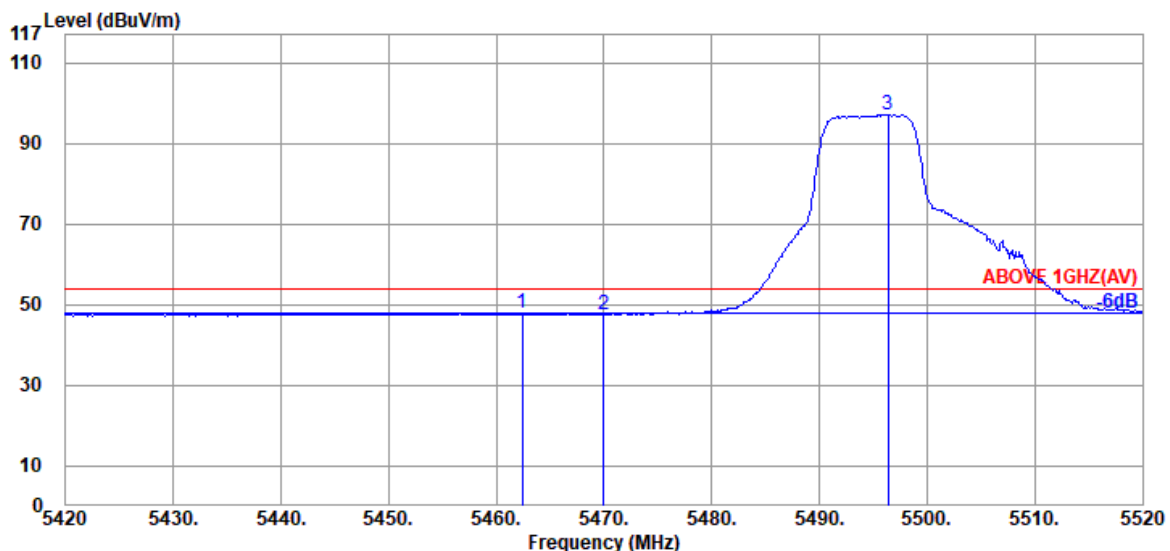

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.400	35.00	9.18	39.26	42.94	47.86	54.00	6.14	Average
5470.000	34.97	9.20	39.26	42.75	47.66	54.00	6.34	Average
@ 5496.400	34.90	9.21	39.26	92.29	97.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

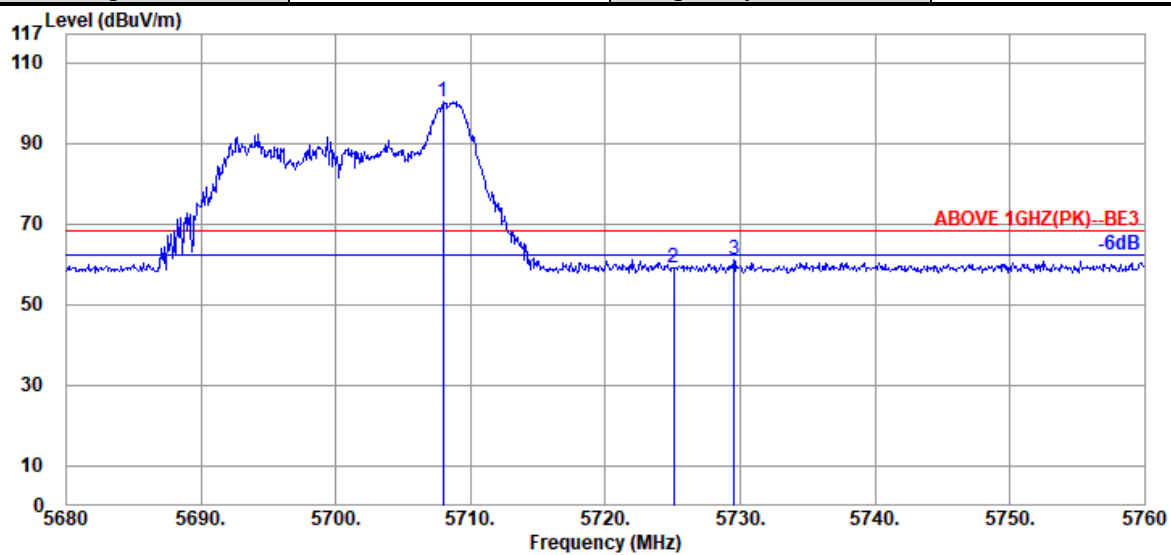

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.53	9.40	39.30	95.80	100.43	---	---	Peak
5725.040	34.57	9.42	39.30	54.37	59.06	68.20	9.14	Peak
5729.520	34.57	9.42	39.30	56.40	61.09	68.20	7.11	Peak

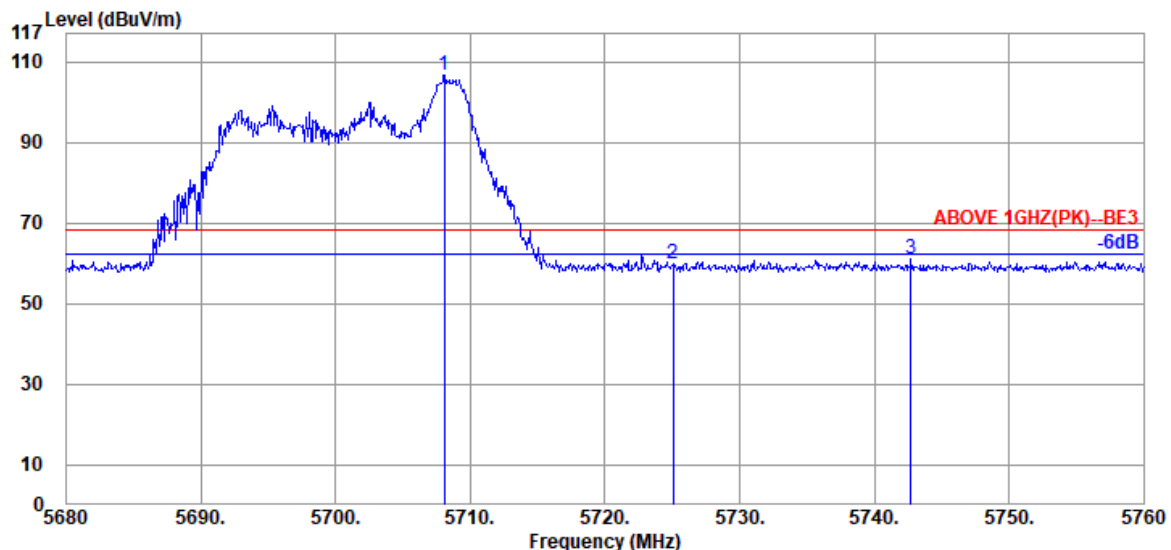

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.080	34.53	9.40	39.30	102.14	106.77	---	---	Peak
5725.040	34.57	9.42	39.30	55.05	59.74	68.20	8.46	Peak
5742.720	34.60	9.43	39.30	56.17	60.90	68.20	7.30	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

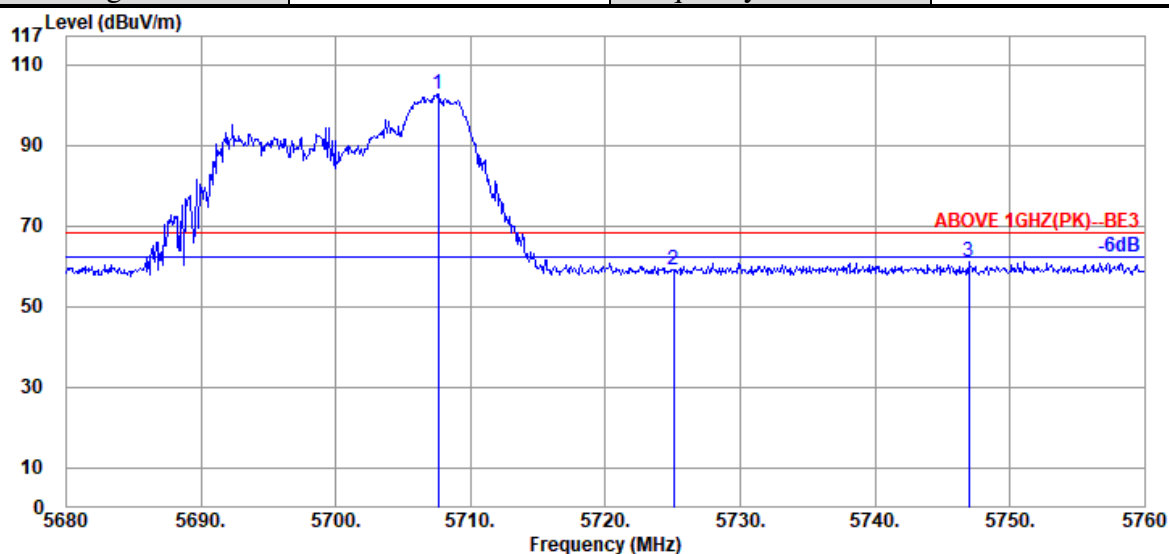

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.600	34.53	9.40	39.30	97.91	102.54	---	---	Peak
5725.040	34.57	9.42	39.30	54.41	59.10	68.20	9.10	Peak
5746.960	34.60	9.43	39.31	56.33	61.05	68.20	7.15	Peak

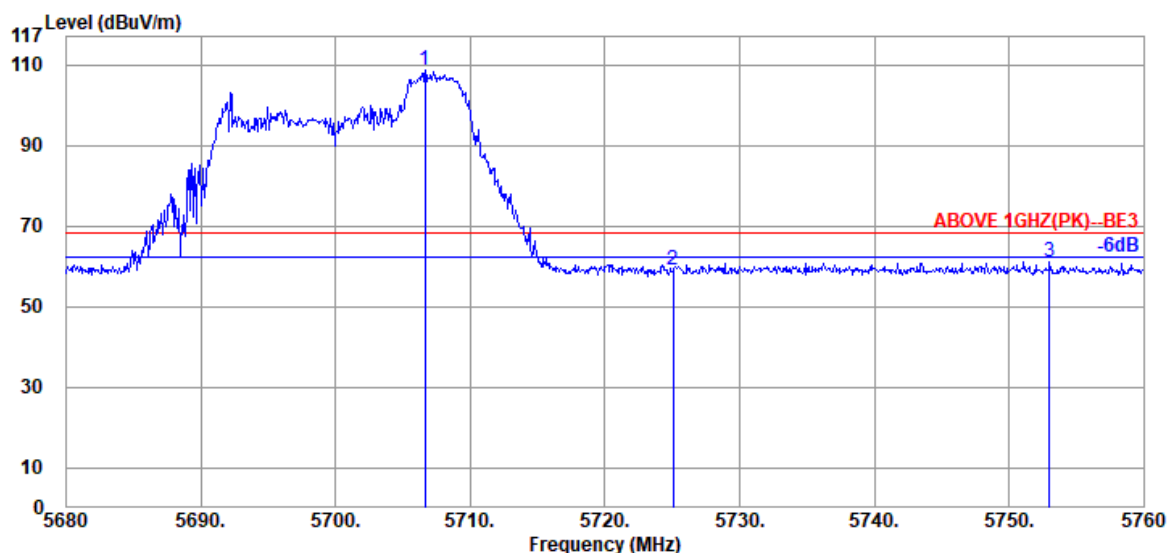

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.640	34.53	9.40	39.30	103.92	108.55	---	---	Peak
5725.040	34.57	9.42	39.30	54.51	59.20	68.20	9.00	Peak
5753.040	34.60	9.45	39.31	56.48	61.22	68.20	6.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

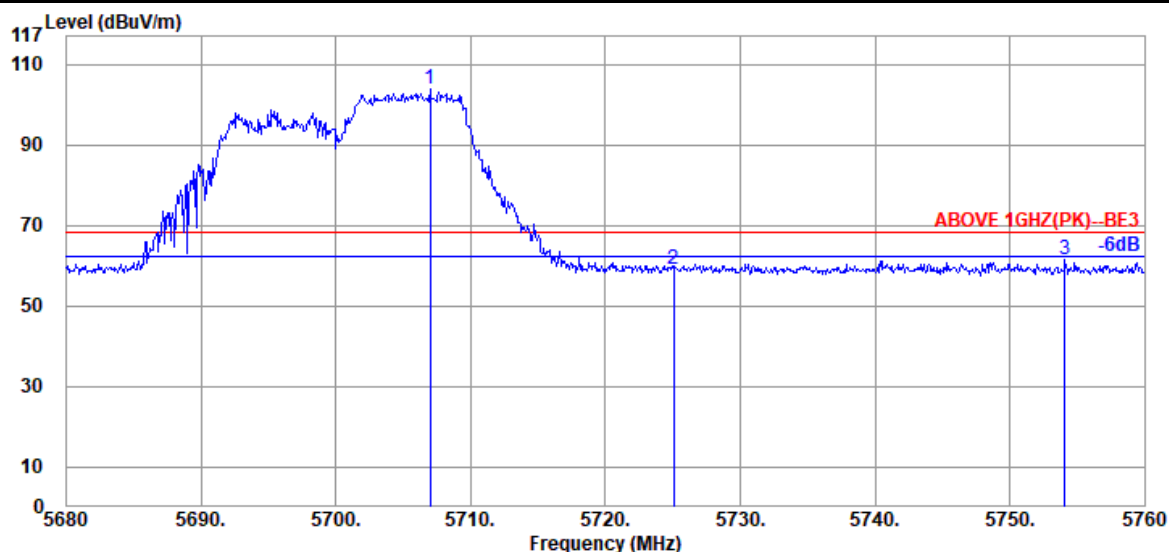

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.960	34.53	9.40	39.30	99.05	103.68	---	---	Peak
5725.040	34.57	9.42	39.30	54.54	59.23	68.20	8.97	Peak
5754.080	34.60	9.45	39.31	56.69	61.43	68.20	6.77	Peak

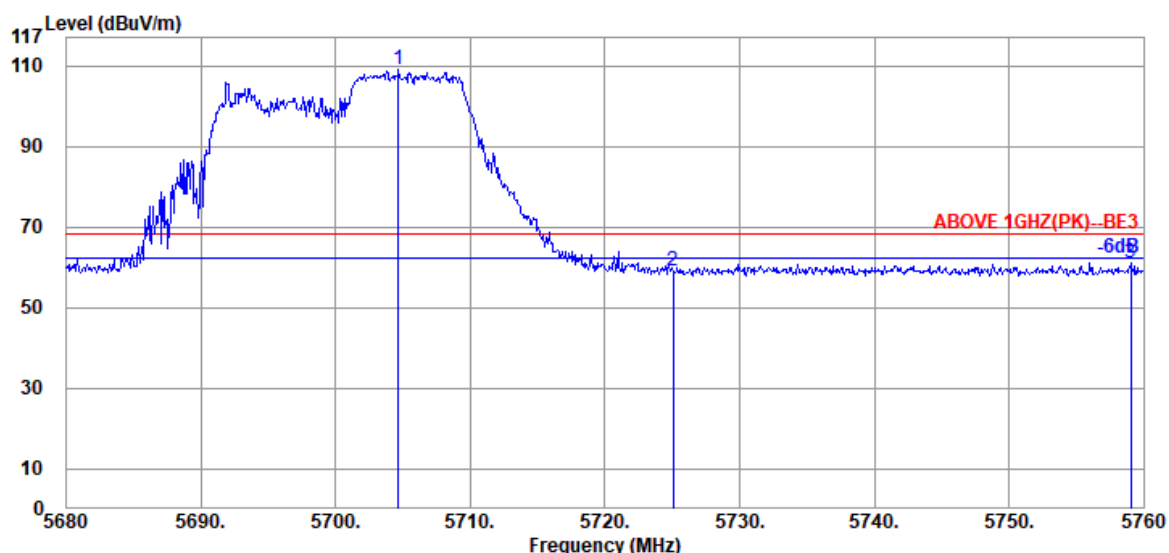

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.640	34.50	9.40	39.30	104.37	108.97	---	---	Peak
5725.040	34.57	9.42	39.30	54.50	59.19	68.20	9.01	Peak
5759.040	34.60	9.45	39.31	56.43	61.17	68.20	7.03	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

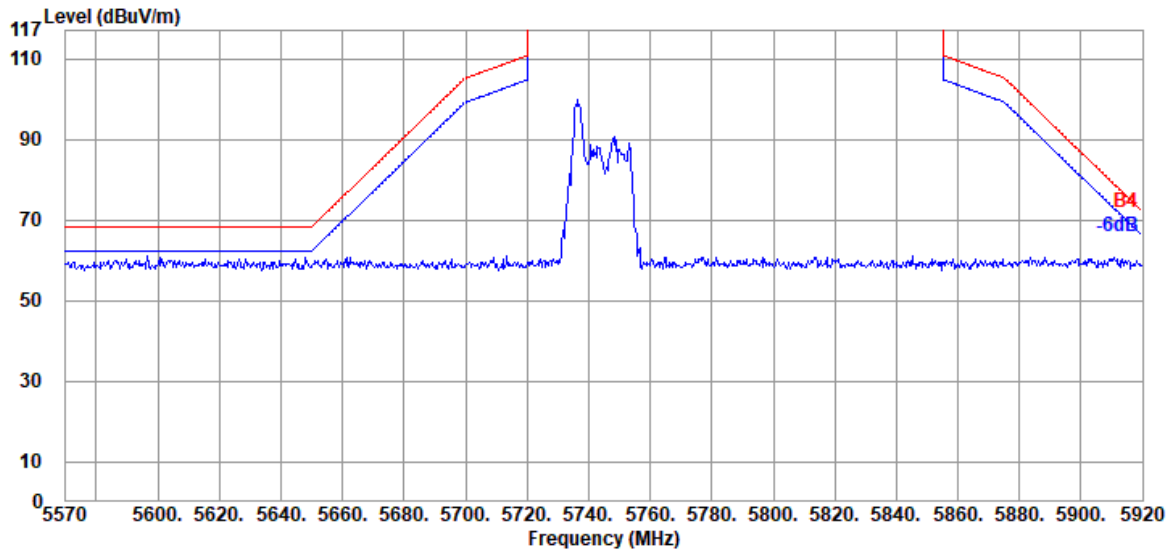

Antenna at Vertical Polarization

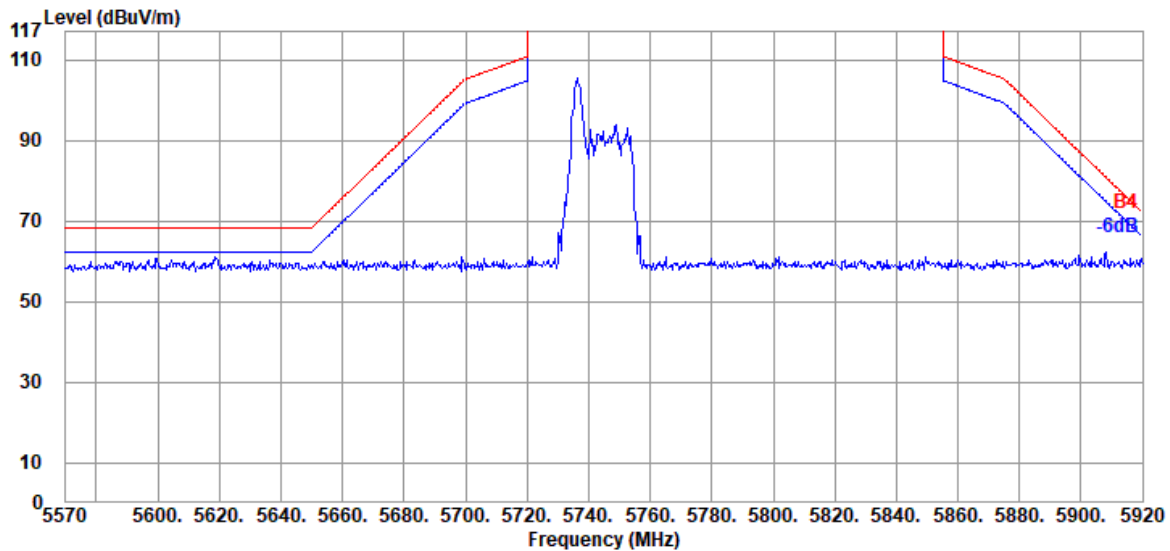


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

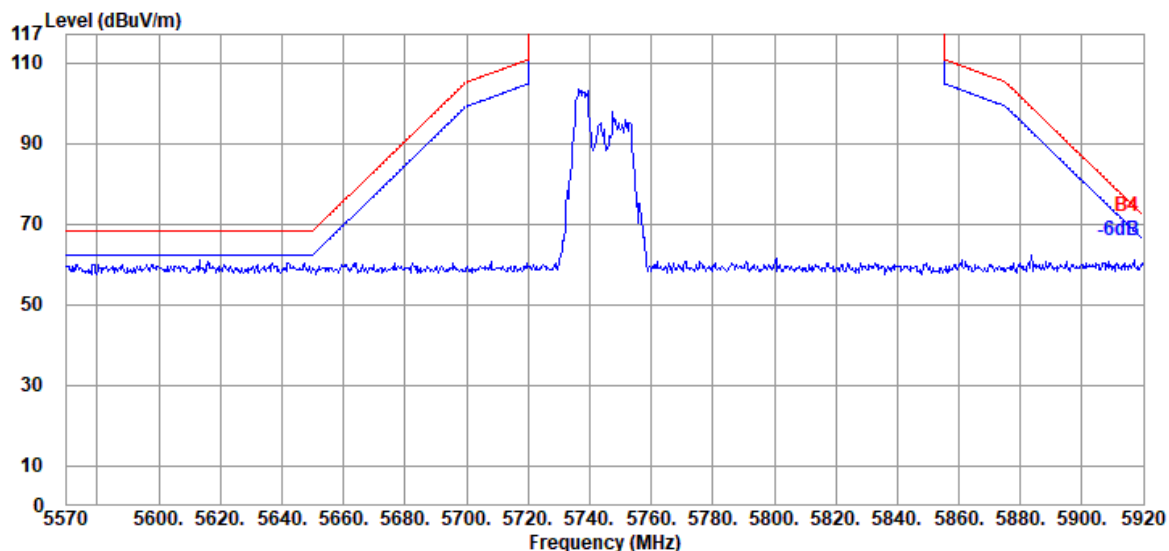

Antenna at Vertical Polarization

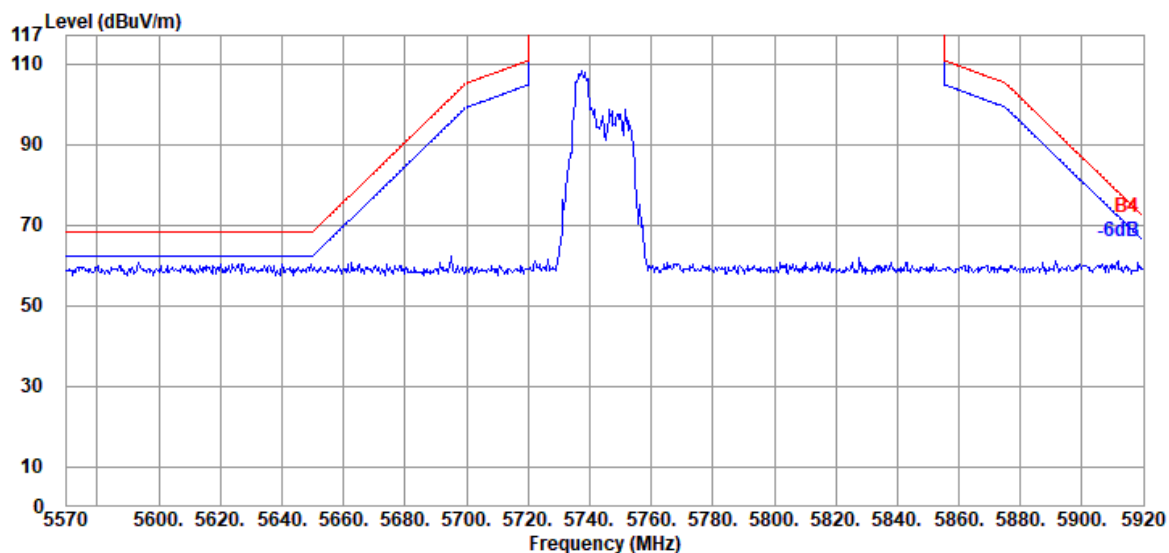


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

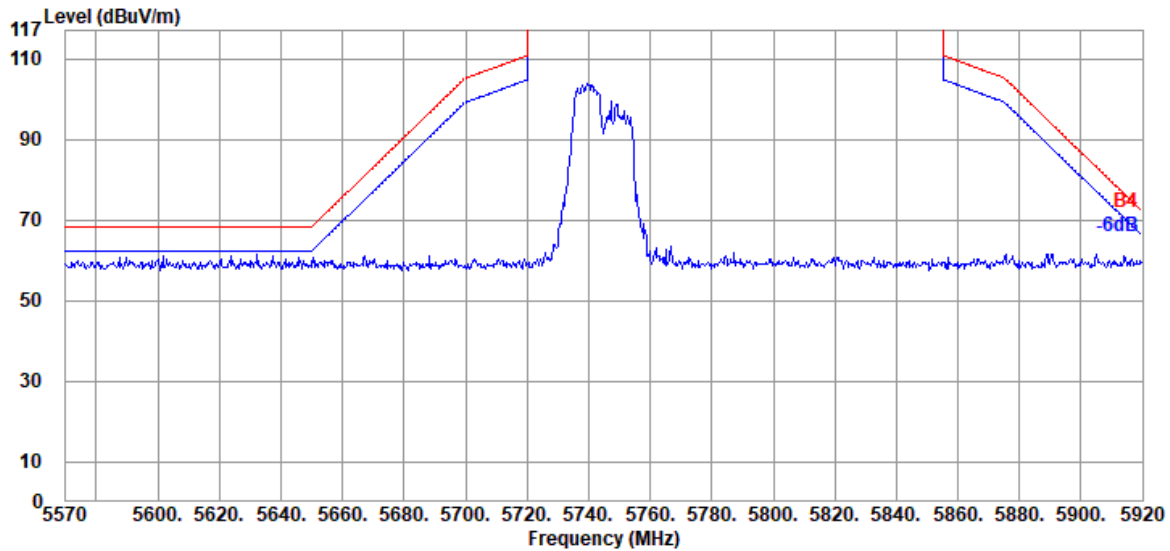

Antenna at Vertical Polarization

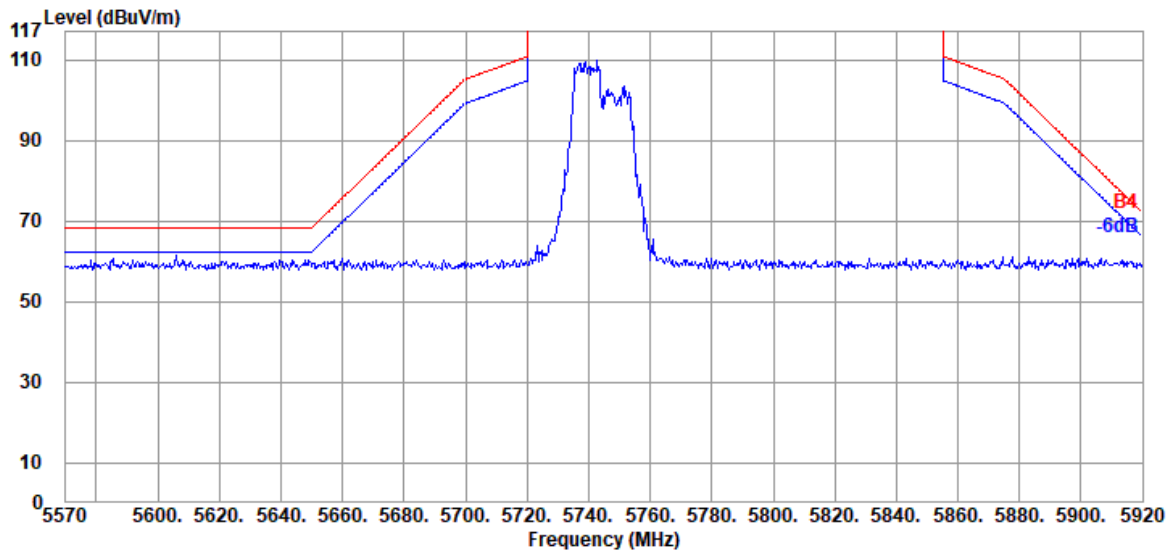


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

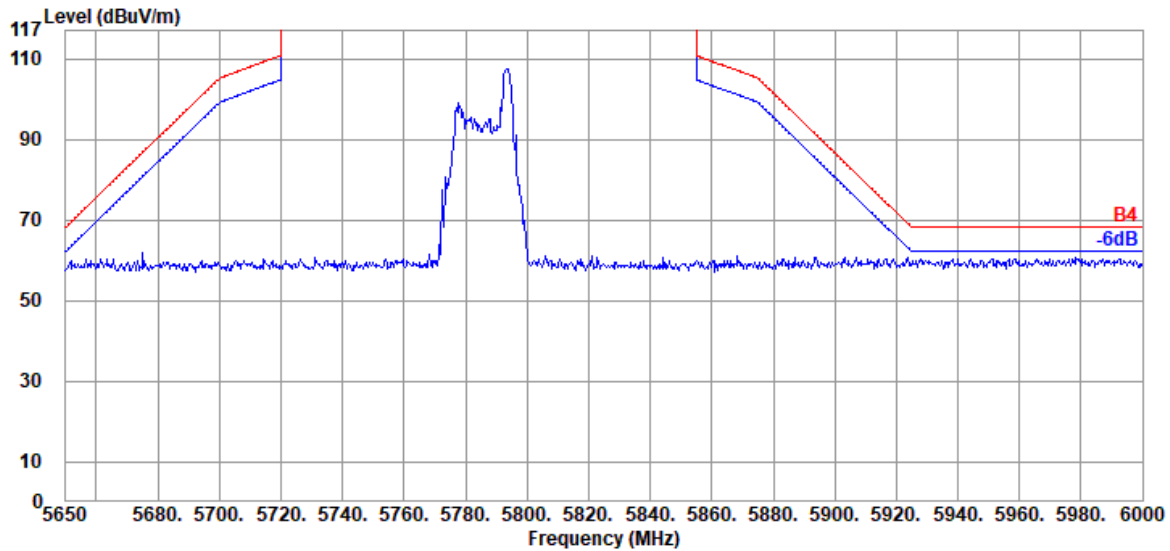

Antenna at Vertical Polarization

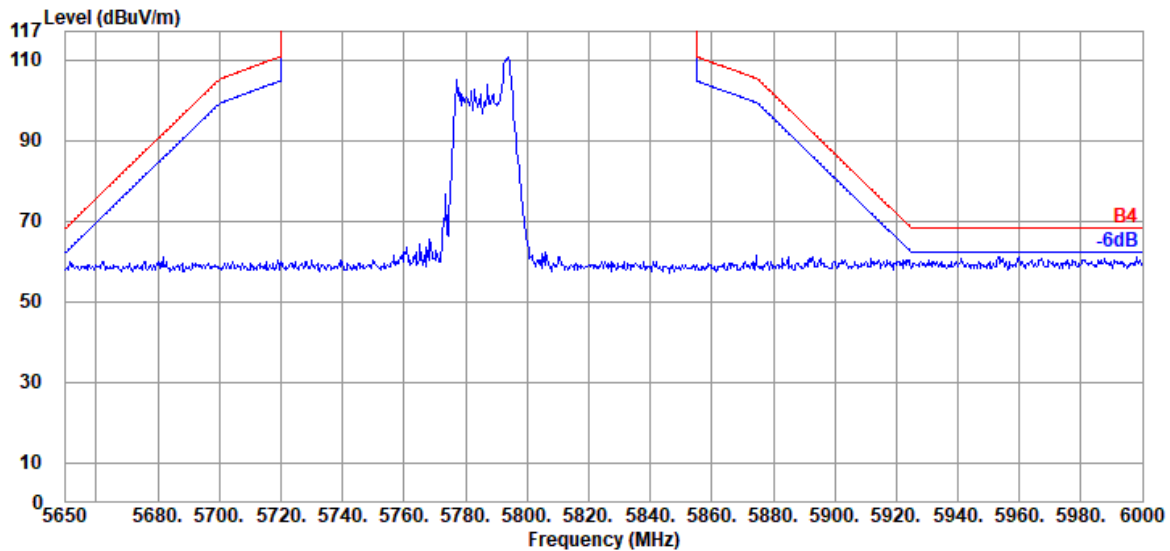


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

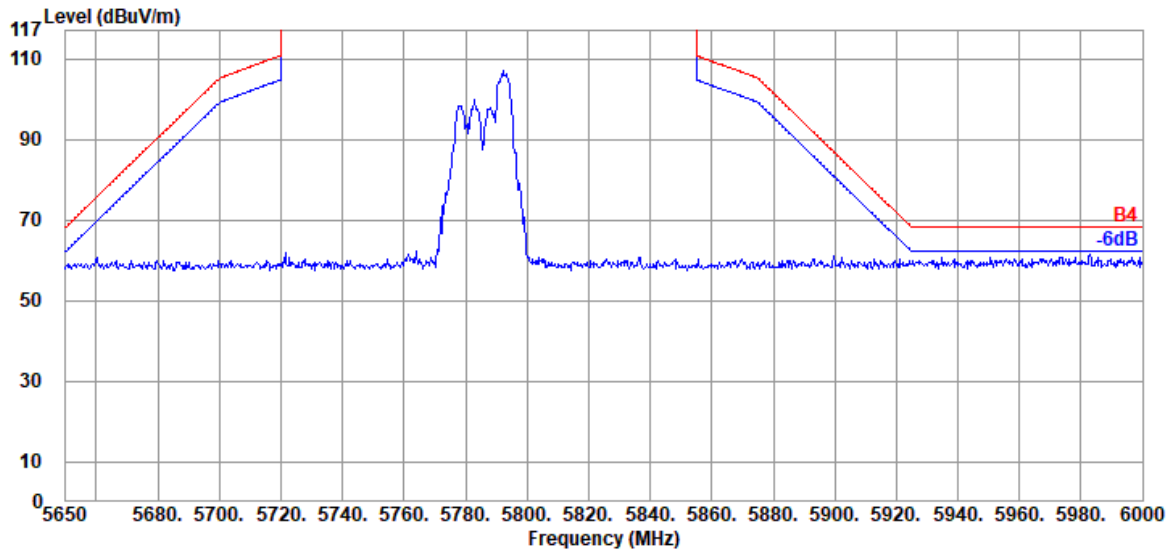

Antenna at Vertical Polarization

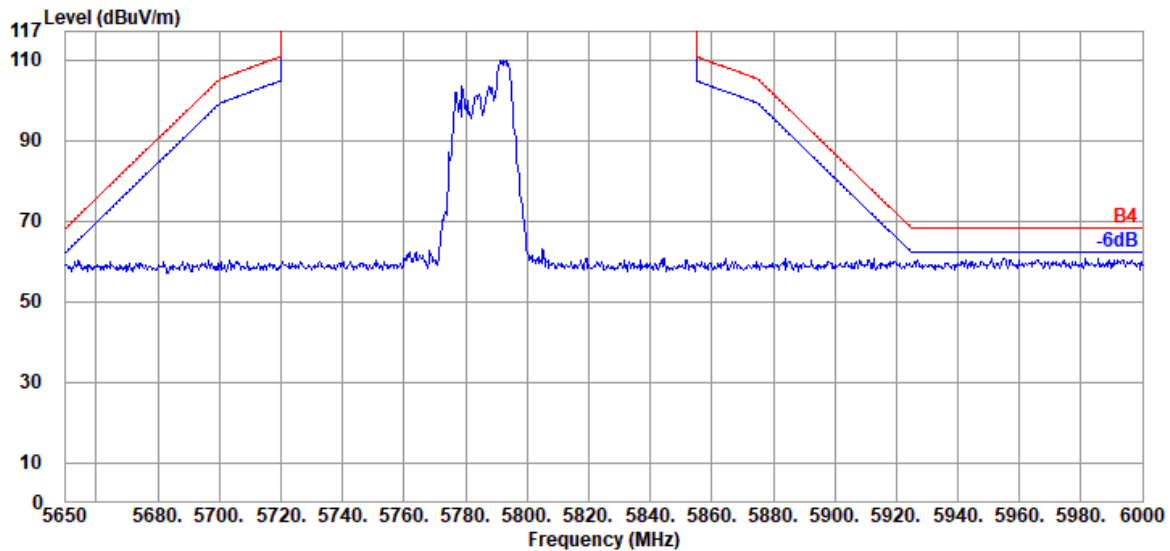


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

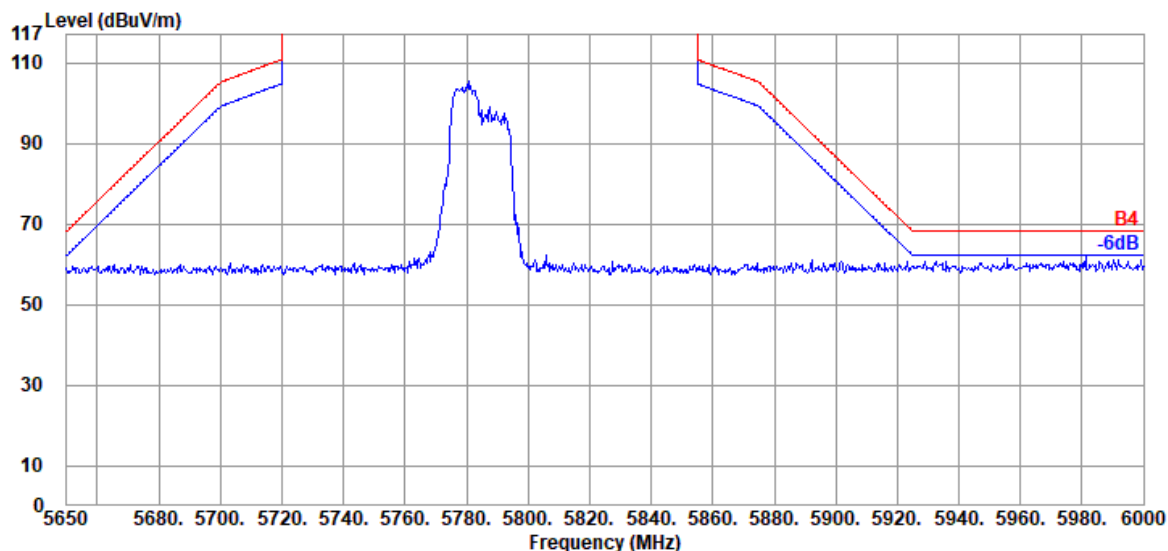

Antenna at Vertical Polarization

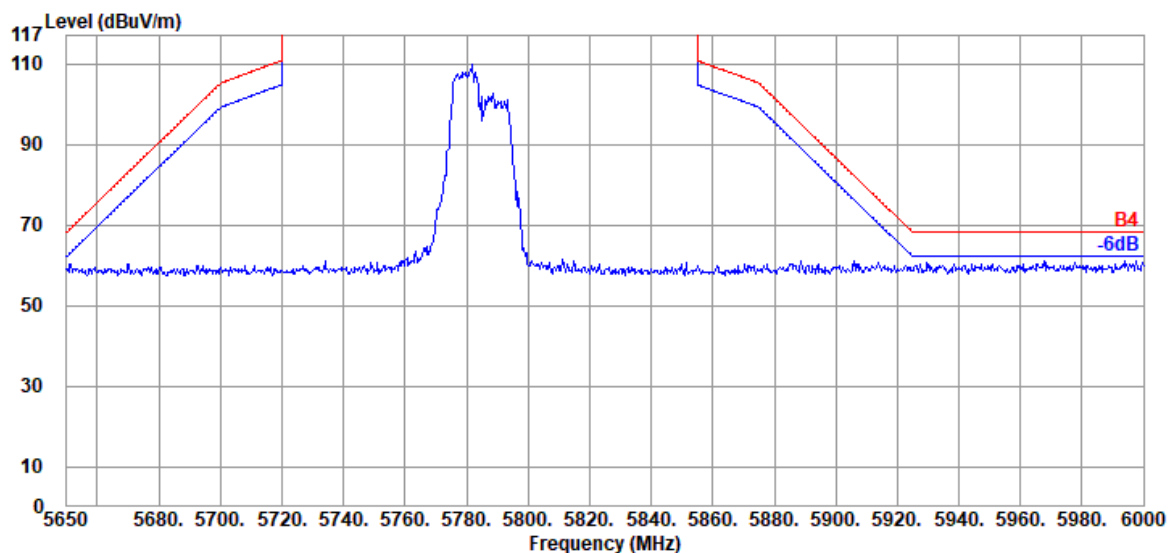


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

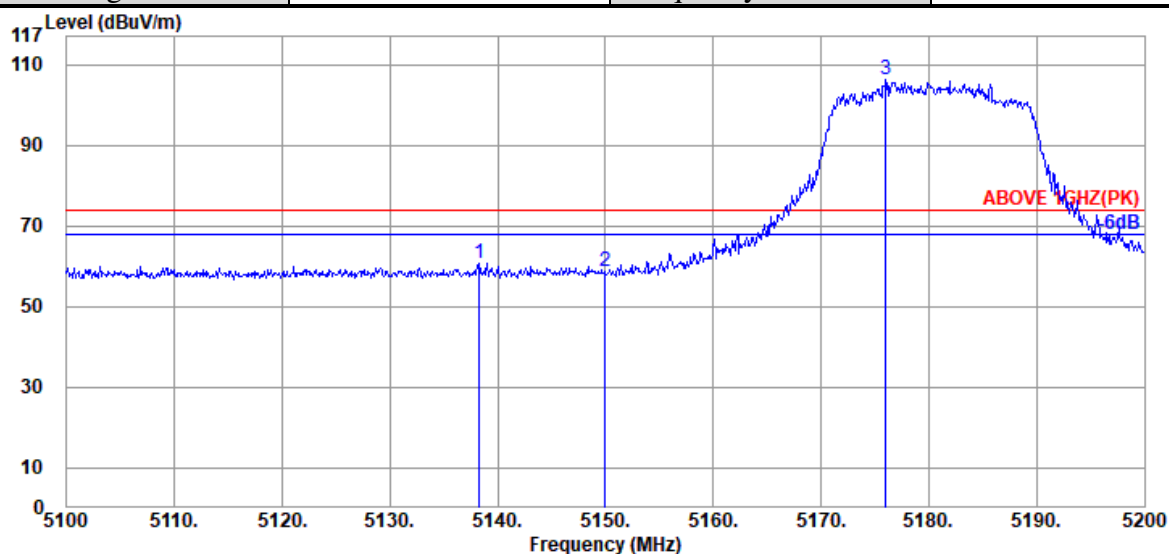

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5138.300	34.13	8.91	39.29	56.88	60.63	74.00	13.37	Peak
5150.000	34.20	8.92	39.29	54.71	58.54	74.00	15.46	Peak
@ 5176.000	34.33	8.95	39.28	102.17	106.17	---	---	Peak

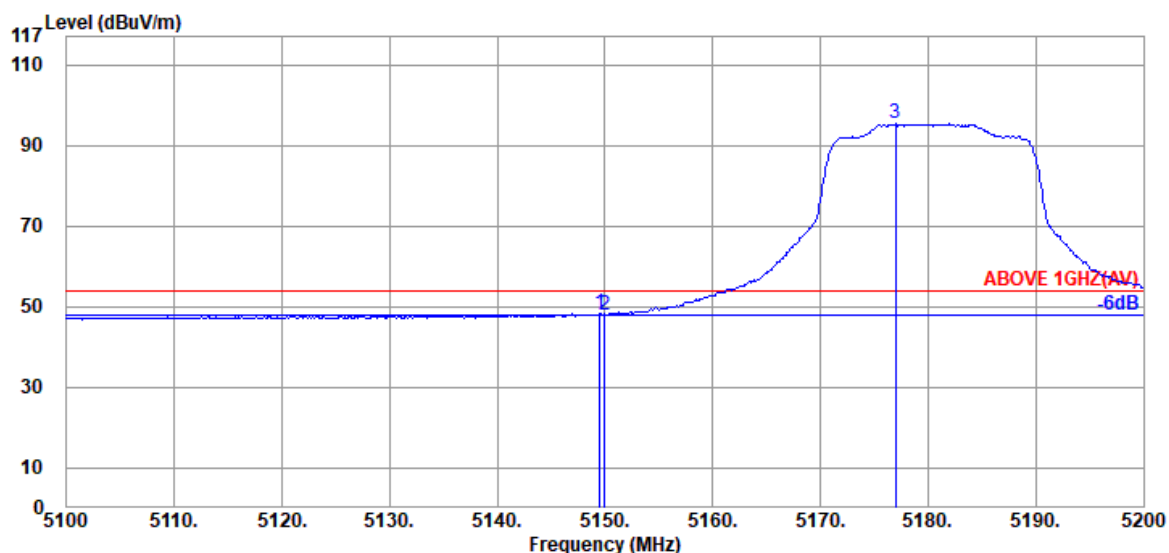


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	39.29	44.37	48.20	54.00	5.80	Average
5150.000	34.20	8.92	39.29	44.18	48.01	54.00	5.99	Average
@ 5177.000	34.33	8.95	39.28	91.28	95.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

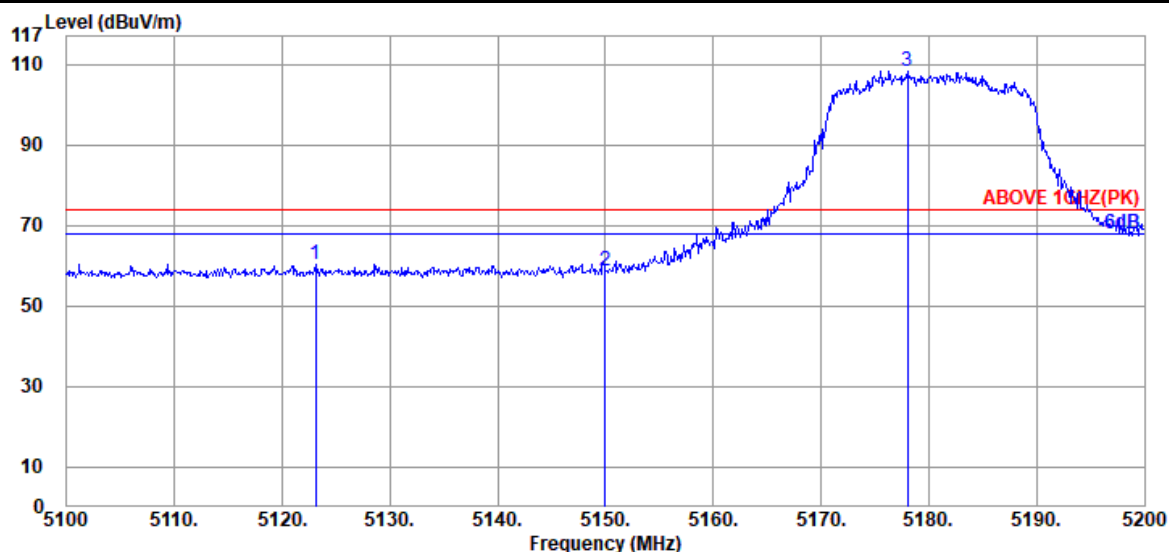

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.100	34.07	8.91	39.29	56.74	60.43	74.00	13.57	Peak
5150.000	34.20	8.92	39.29	54.98	58.81	74.00	15.19	Peak
@ 5178.000	34.33	8.95	39.28	104.37	108.37	---	---	Peak

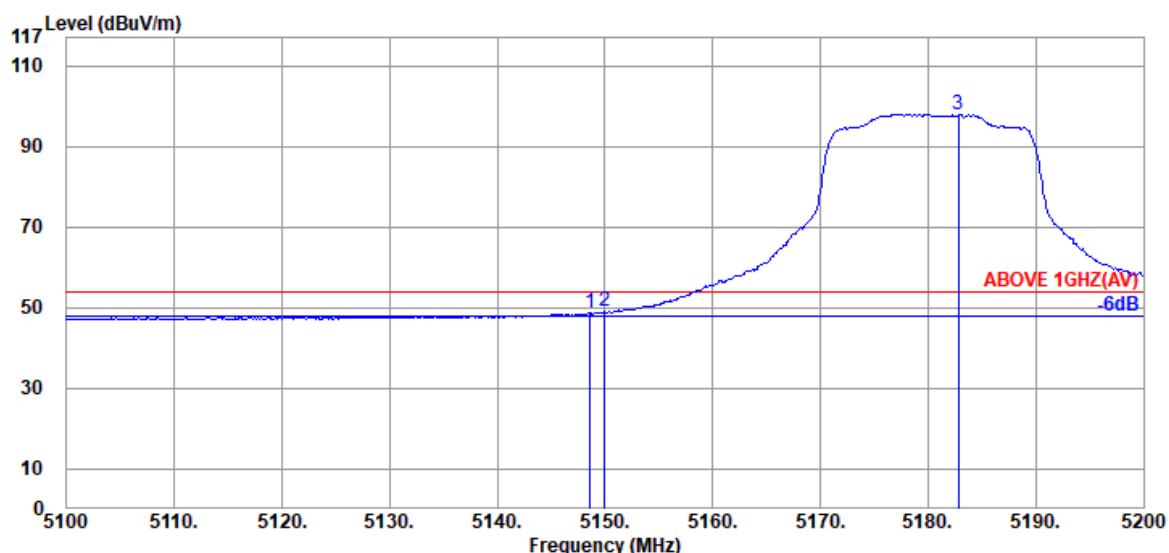

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.20	8.92	39.29	45.03	48.86	54.00	5.14	Average
5150.000	34.20	8.92	39.29	45.10	48.93	54.00	5.07	Average
@ 5182.800	34.33	8.95	39.28	93.95	97.95	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

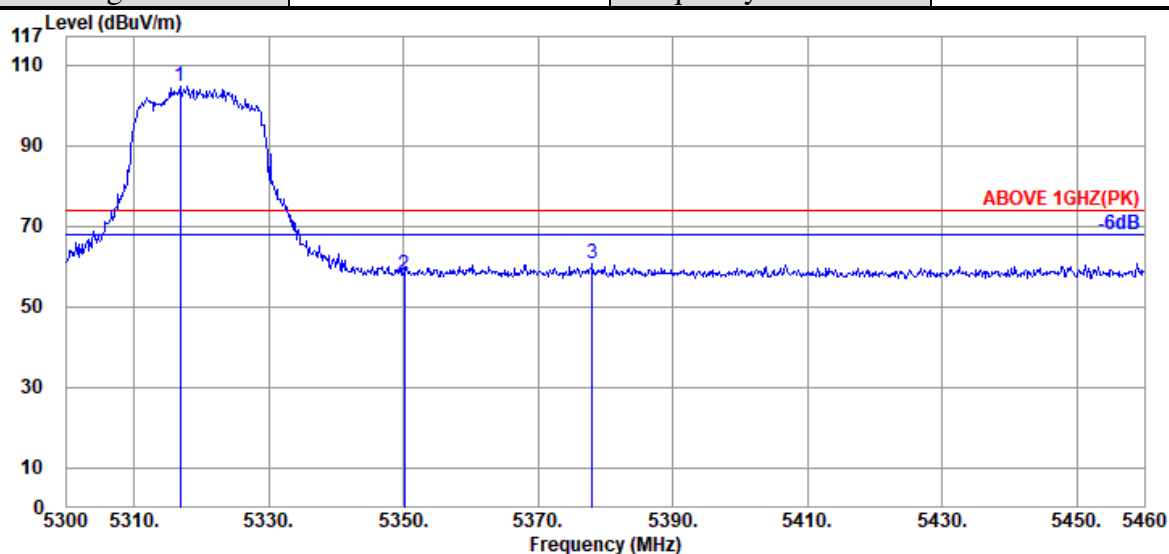

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.60	9.07	39.27	100.40	104.80	---	---	Peak
5350.080	34.80	9.10	39.27	53.33	57.96	74.00	16.04	Peak
5378.080	34.93	9.13	39.27	55.72	60.51	74.00	13.49	Peak

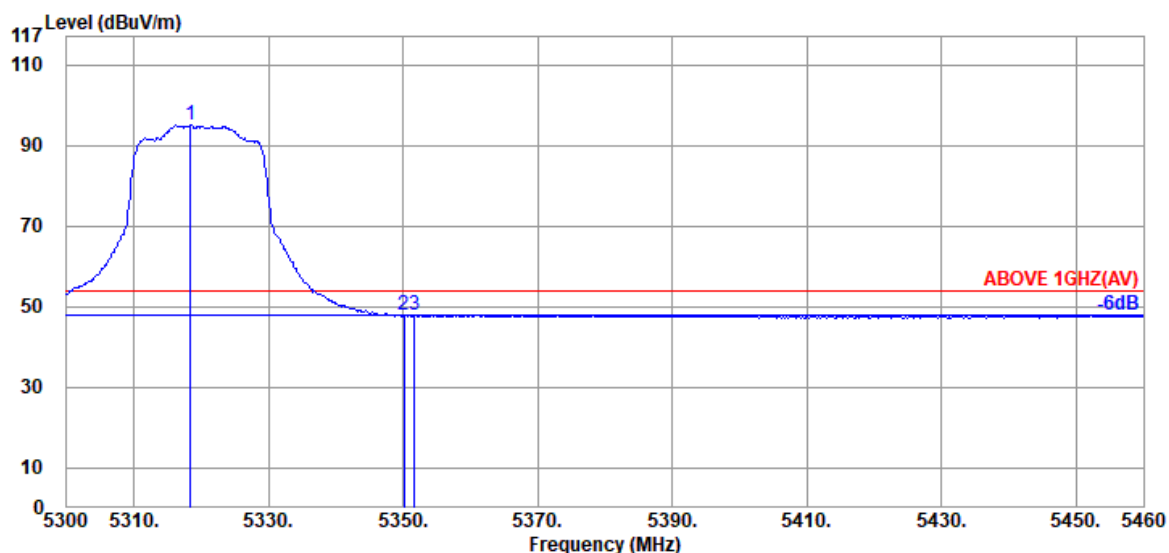

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.60	9.07	39.27	90.48	94.88	---	---	Average
5350.080	34.80	9.10	39.27	43.24	47.87	54.00	6.13	Average
5351.680	34.80	9.10	39.27	43.43	48.06	54.00	5.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

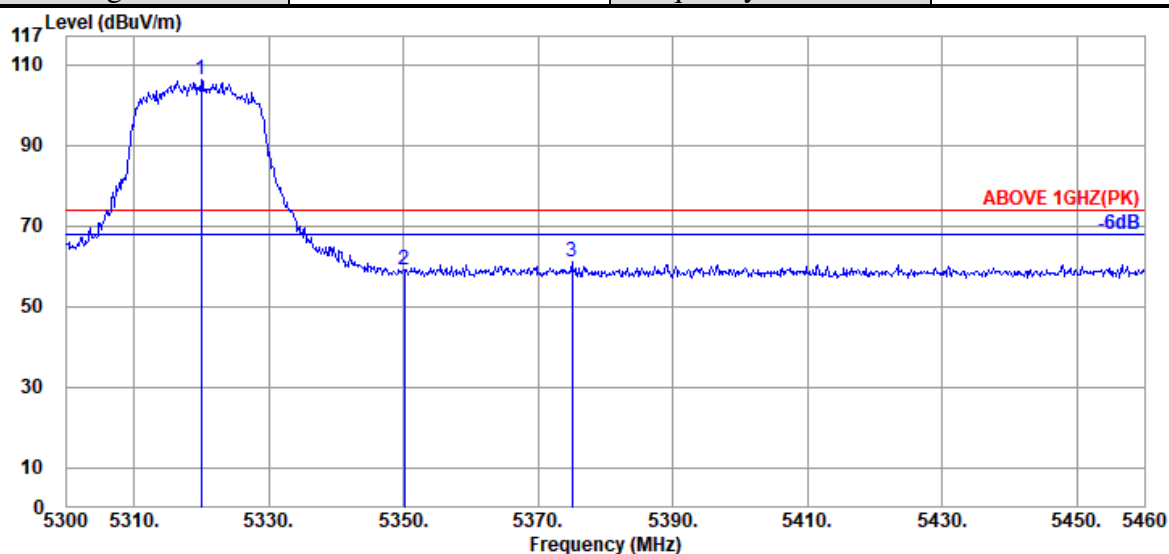

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.000	34.60	9.07	39.27	101.80	106.20	---	---	Peak
5350.080	34.80	9.10	39.27	54.52	59.15	74.00	14.85	Peak
5375.040	34.93	9.11	39.27	56.20	60.97	74.00	13.03	Peak

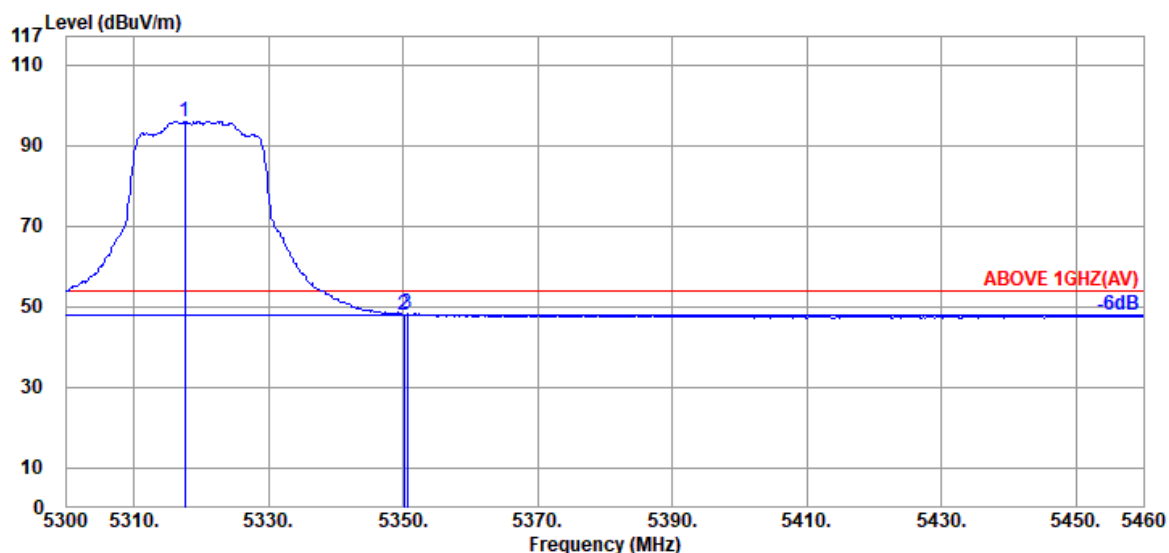

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.60	9.07	39.27	91.55	95.95	---	---	Average
5350.080	34.80	9.10	39.27	43.34	47.97	54.00	6.03	Average
5350.560	34.80	9.10	39.27	43.62	48.25	54.00	5.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

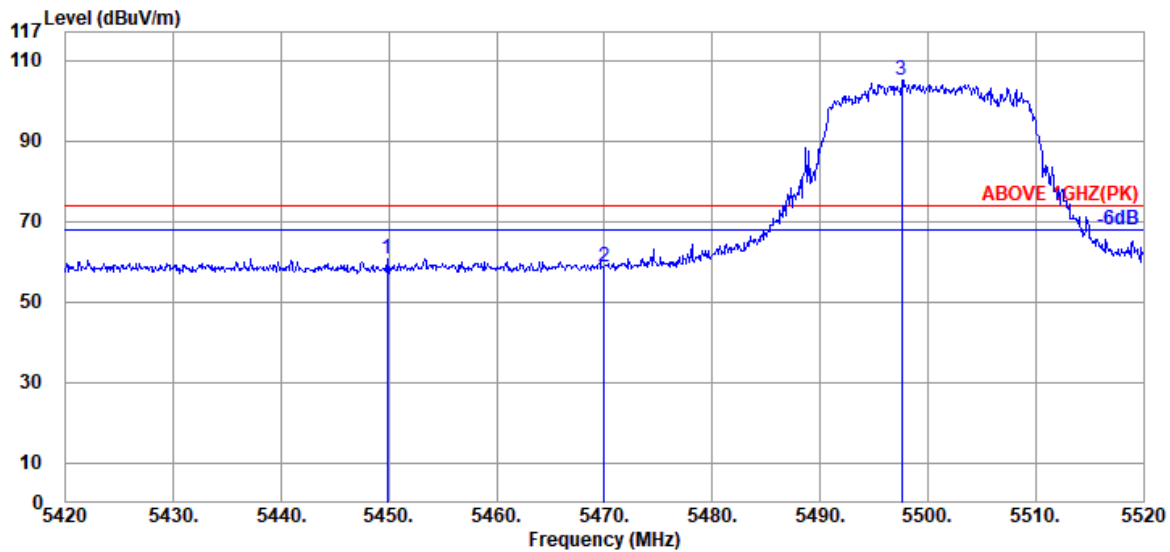

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5449.800	35.00	9.18	39.26	55.81	60.73	74.00	13.27	Peak
5470.000	34.97	9.20	39.26	53.91	58.82	74.00	15.18	Peak
@ 5497.600	34.90	9.23	39.26	100.04	104.91	---	---	Peak

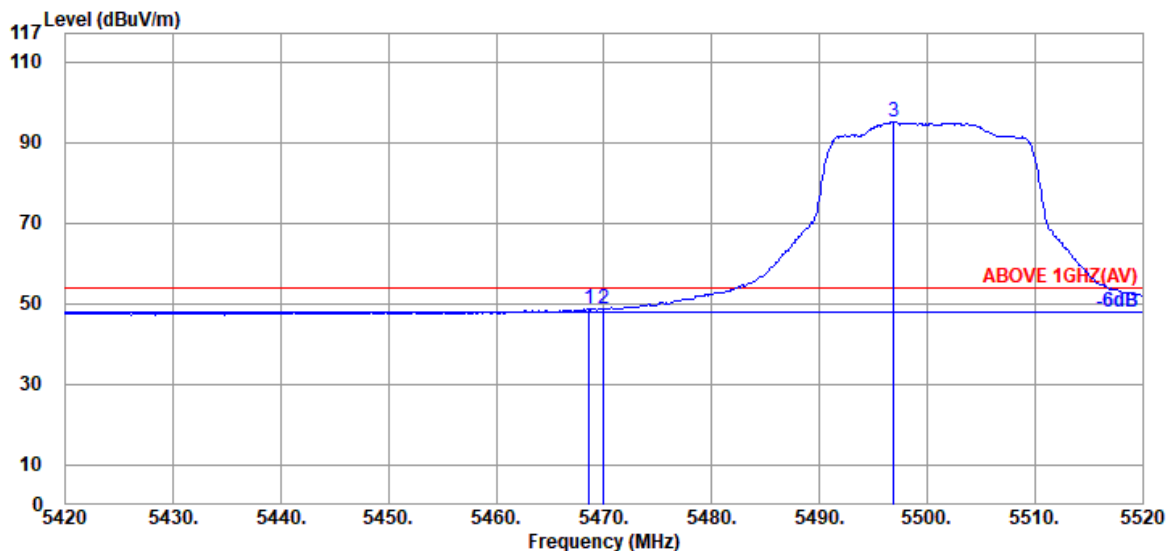

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.600	34.97	9.20	39.26	43.82	48.73	54.00	5.27	Average
5470.000	34.97	9.20	39.26	43.82	48.73	54.00	5.27	Average
@ 5496.900	34.90	9.23	39.26	90.25	95.12	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

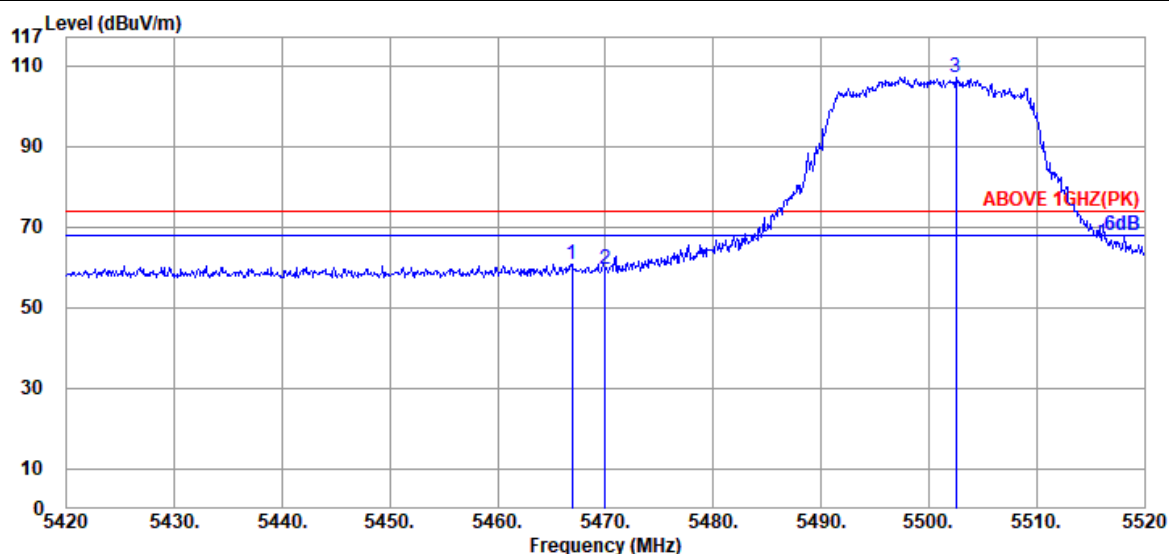

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.97	9.20	39.26	55.97	60.88	74.00	13.12	Peak
5470.000	34.97	9.20	39.26	54.59	59.50	74.00	14.50	Peak
@ 5502.500	34.90	9.23	39.26	102.20	107.07	---	---	Peak

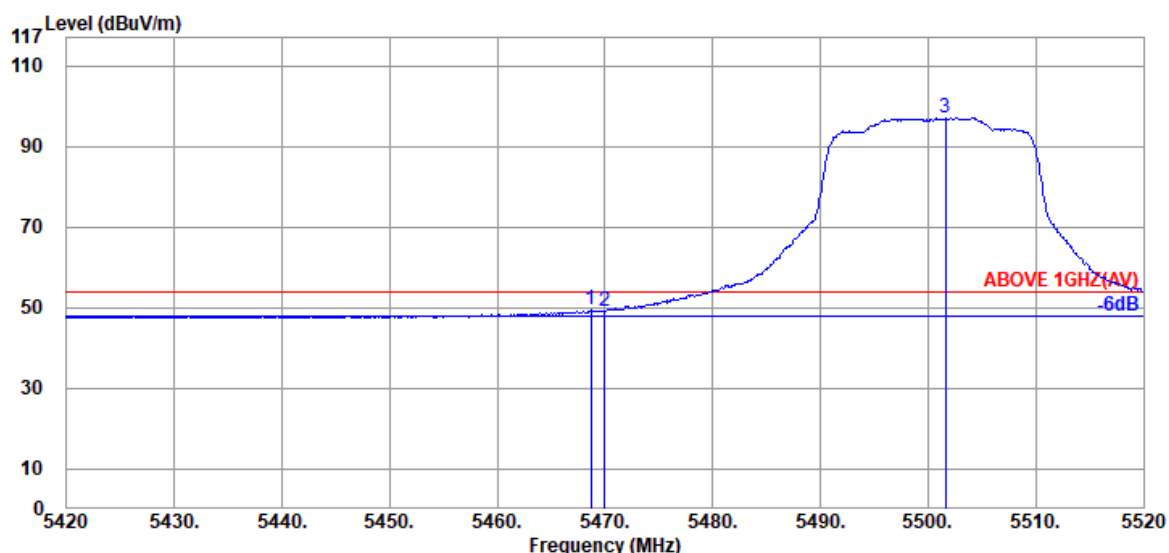

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.97	9.20	39.26	44.54	49.45	54.00	4.55	Average
5470.000	34.97	9.20	39.26	44.33	49.24	54.00	4.76	Average
@ 5501.600	34.90	9.23	39.26	92.11	96.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

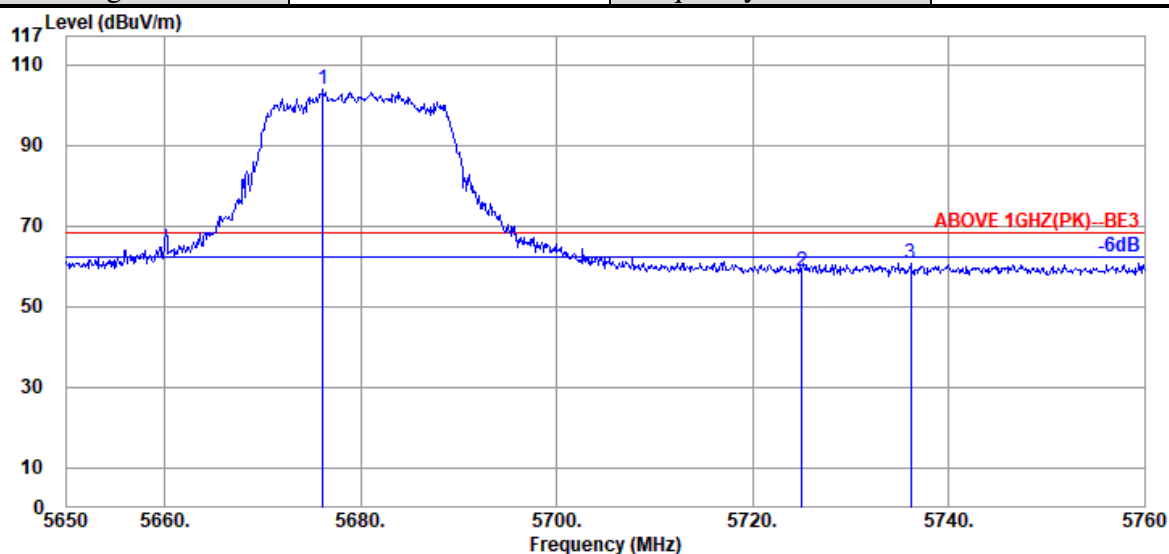

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5676.180	34.57	9.37	39.29	99.02	103.67	---	---	Peak
	5725.020	34.57	9.42	39.30	53.96	58.65	68.20	9.55	Peak
	5736.130	34.57	9.43	39.30	56.04	60.74	68.20	7.46	Peak

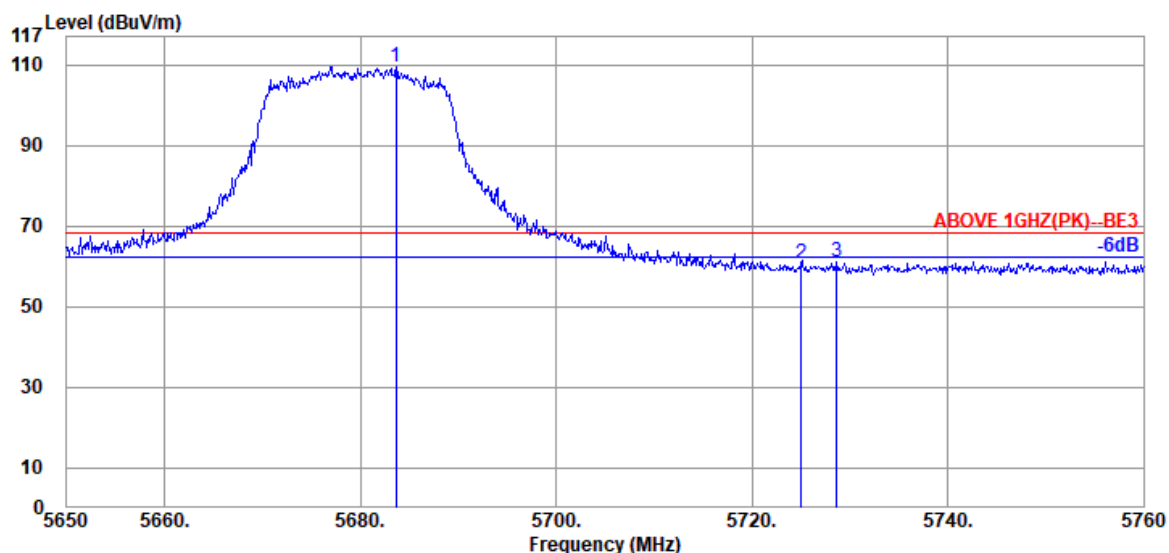

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5683.660	34.57	9.39	39.29	104.84	109.51	---	---	Peak
	5725.020	34.57	9.42	39.30	55.98	60.67	68.20	7.53	Peak
	5728.650	34.57	9.42	39.30	56.46	61.15	68.20	7.05	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

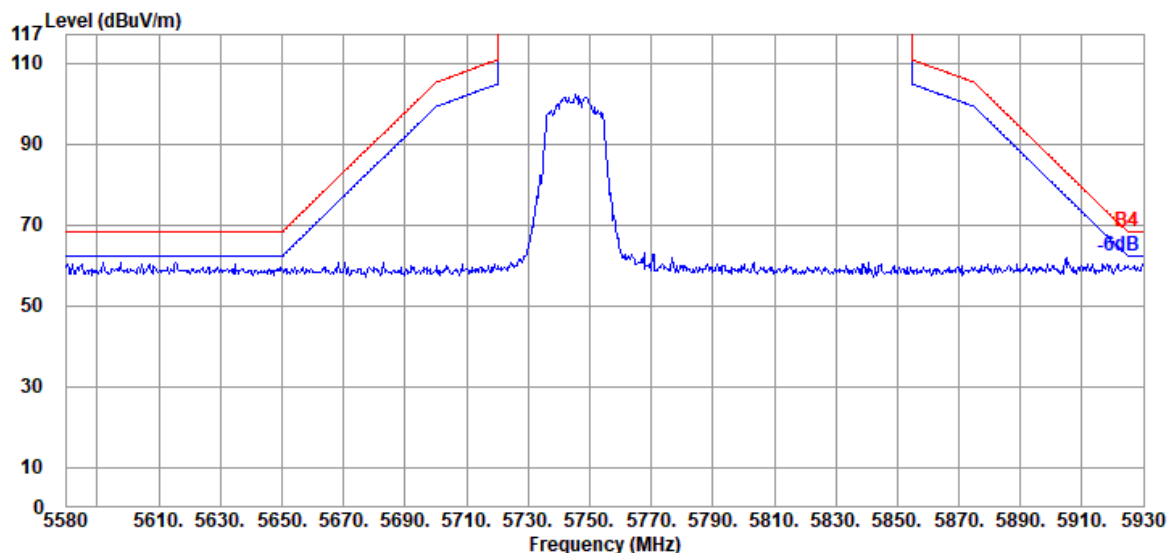

Antenna at Vertical Polarization

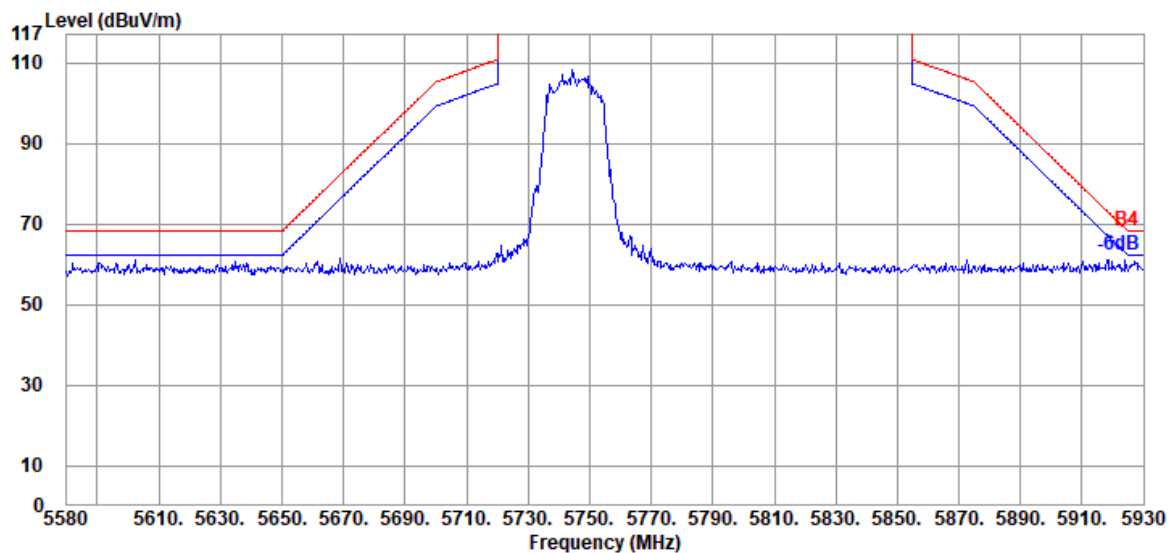


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

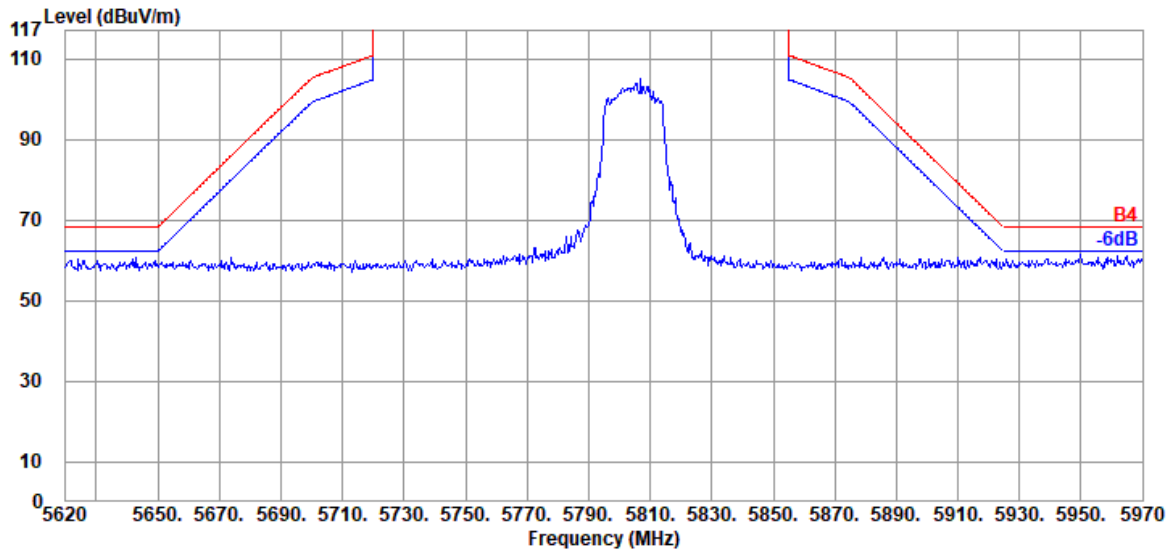

Antenna at Vertical Polarization

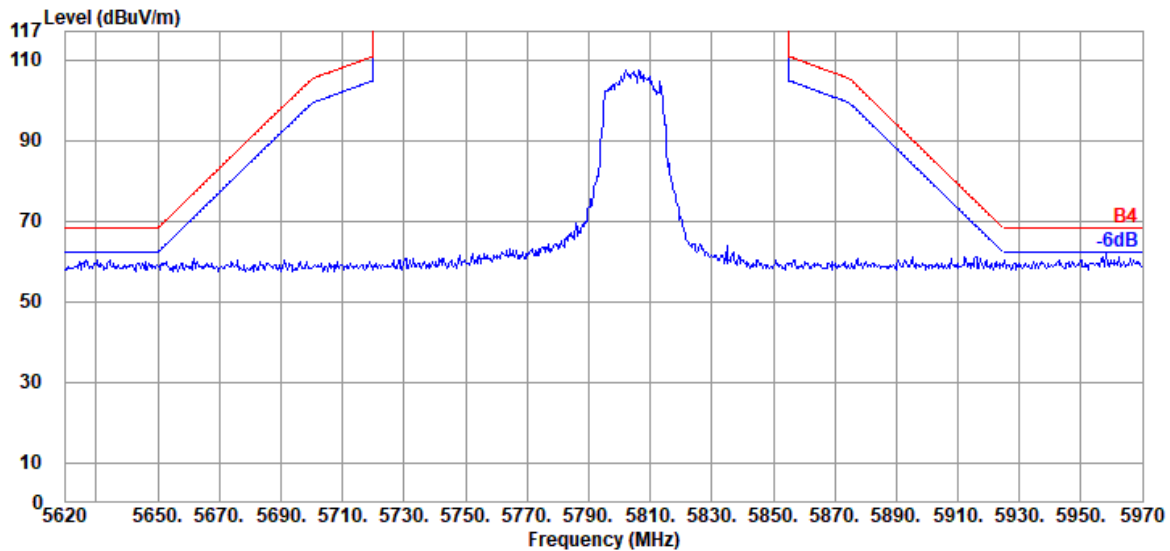


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

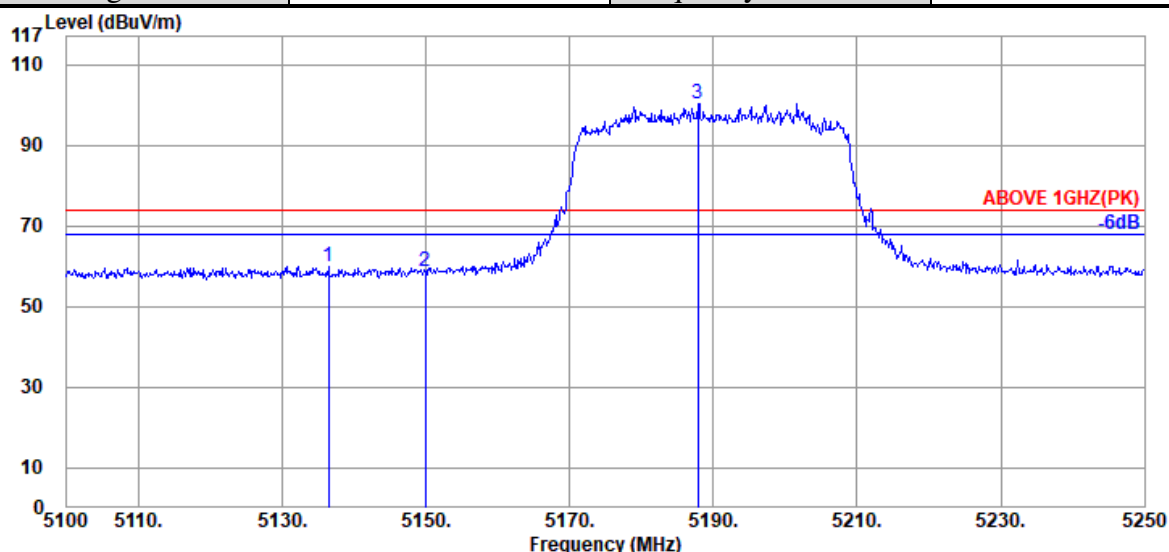

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.450	34.13	8.91	39.29	56.31	60.06	74.00	13.94	Peak
5149.950	34.20	8.92	39.29	55.03	58.86	74.00	15.14	Peak
@ 5187.900	34.40	8.95	39.28	96.26	100.33	---	---	Peak

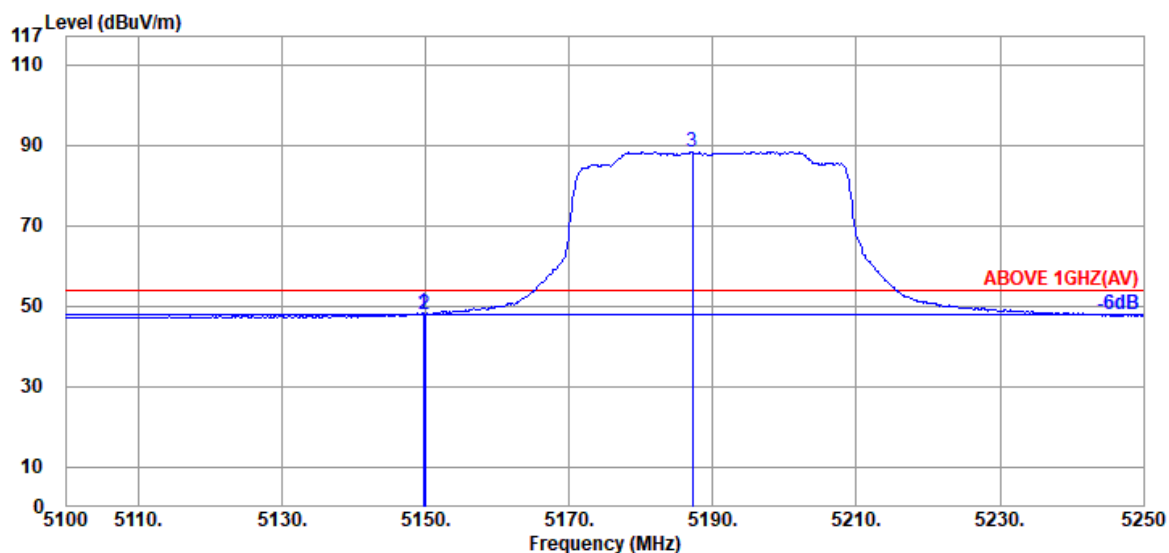


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	39.29	44.33	48.16	54.00	5.84	Average
5149.950	34.20	8.92	39.29	44.15	47.98	54.00	6.02	Average
@ 5187.150	34.40	8.95	39.28	84.33	88.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

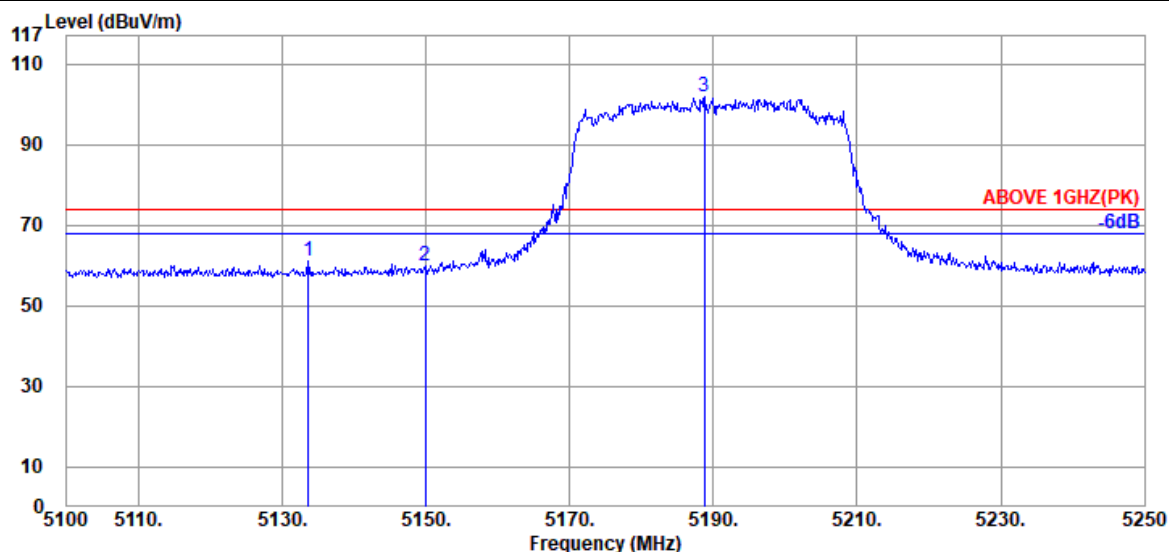

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.600	34.13	8.91	39.29	57.35	61.10	74.00	12.90	Peak
5149.950	34.20	8.92	39.29	56.20	60.03	74.00	13.97	Peak
@ 5188.800	34.40	8.95	39.28	97.77	101.84	---	---	Peak

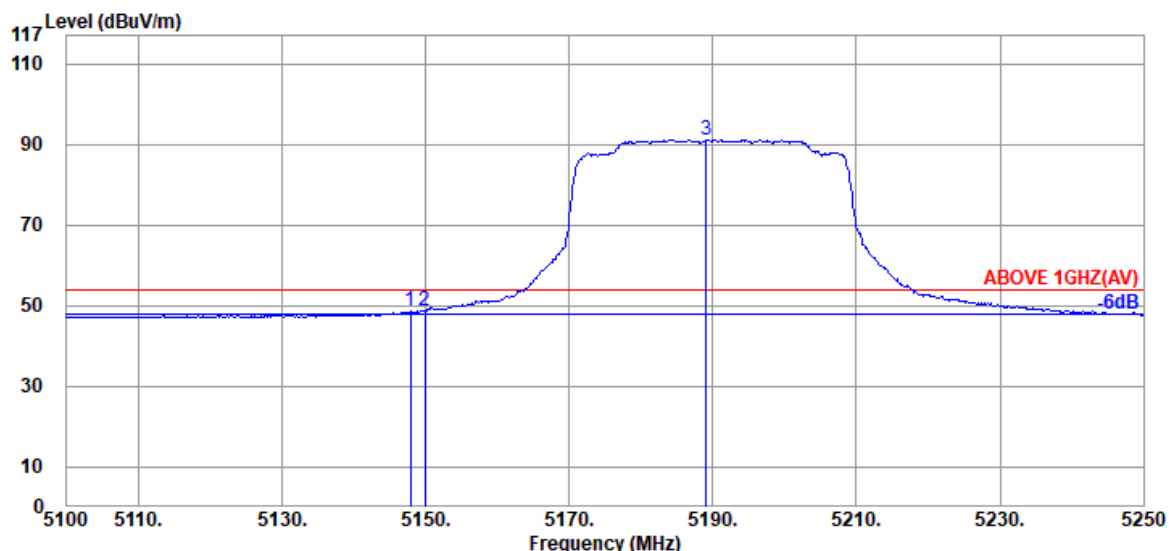

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.20	8.92	39.29	44.82	48.65	54.00	5.35	Average
5149.950	34.20	8.92	39.29	44.99	48.82	54.00	5.18	Average
@ 5189.100	34.40	8.95	39.28	87.01	91.08	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

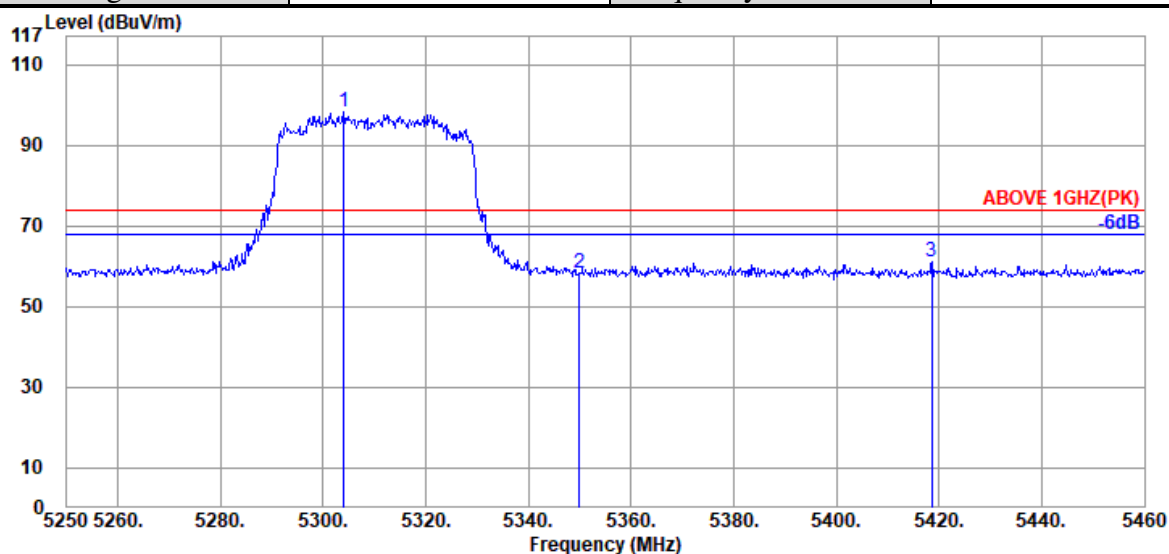

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.970	34.50	9.05	39.28	93.81	98.08	---	---	Peak
5349.960	34.80	9.10	39.27	53.63	58.26	74.00	15.74	Peak
5418.630	35.00	9.15	39.27	56.11	60.99	74.00	13.01	Peak

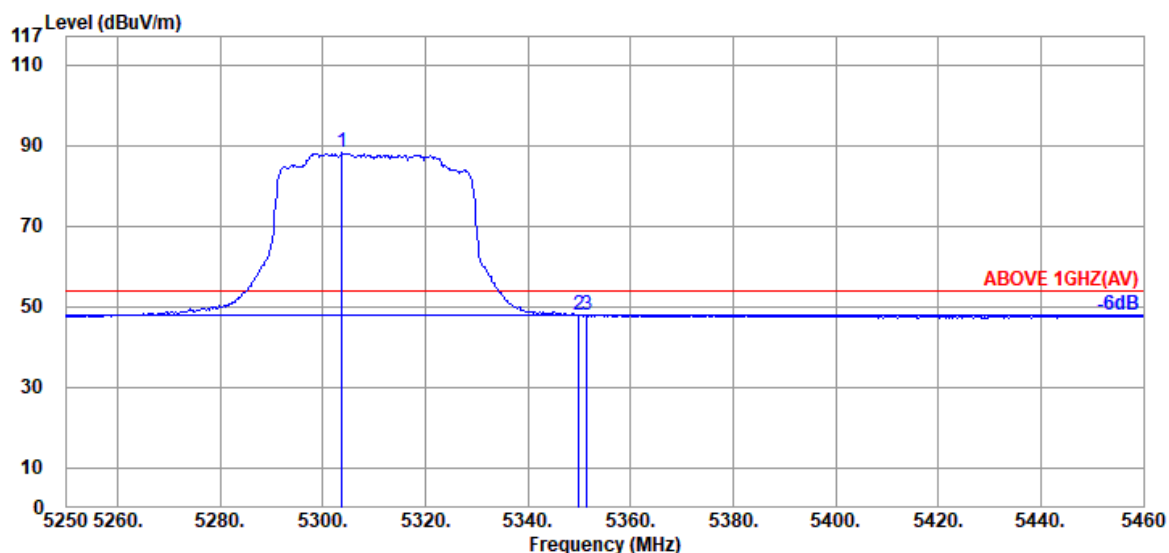

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.760	34.50	9.05	39.28	83.84	88.11	---	---	Average
5349.960	34.80	9.10	39.27	43.25	47.88	54.00	6.12	Average
5351.430	34.80	9.10	39.27	43.31	47.94	54.00	6.06	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

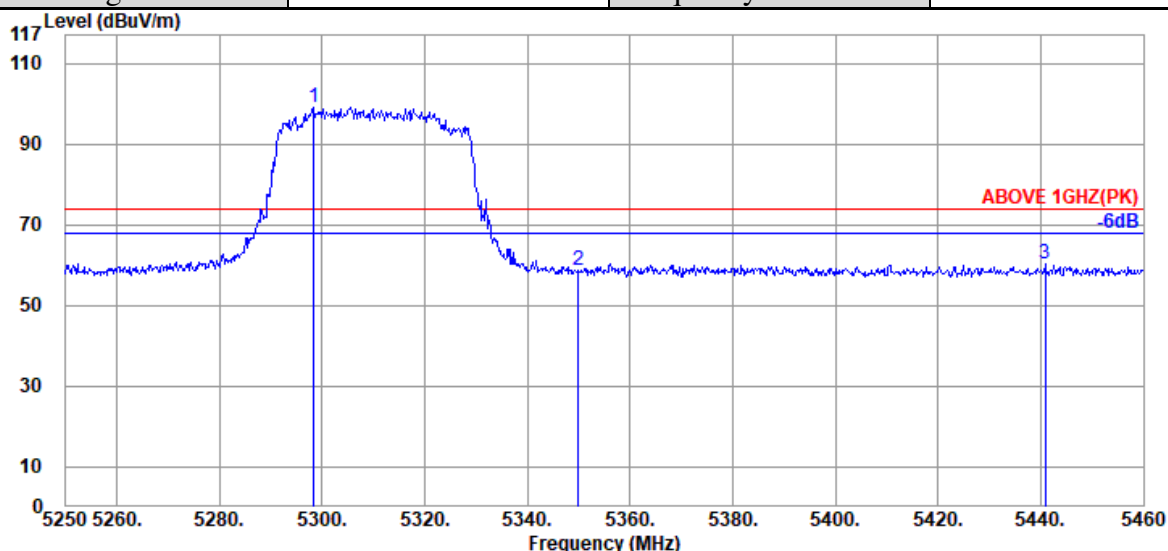

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.300	34.50	9.05	39.28	94.62	98.89	---	---	Peak
5349.960	34.80	9.10	39.27	54.06	58.69	74.00	15.31	Peak
5440.890	35.00	9.17	39.26	55.42	60.33	74.00	13.67	Peak

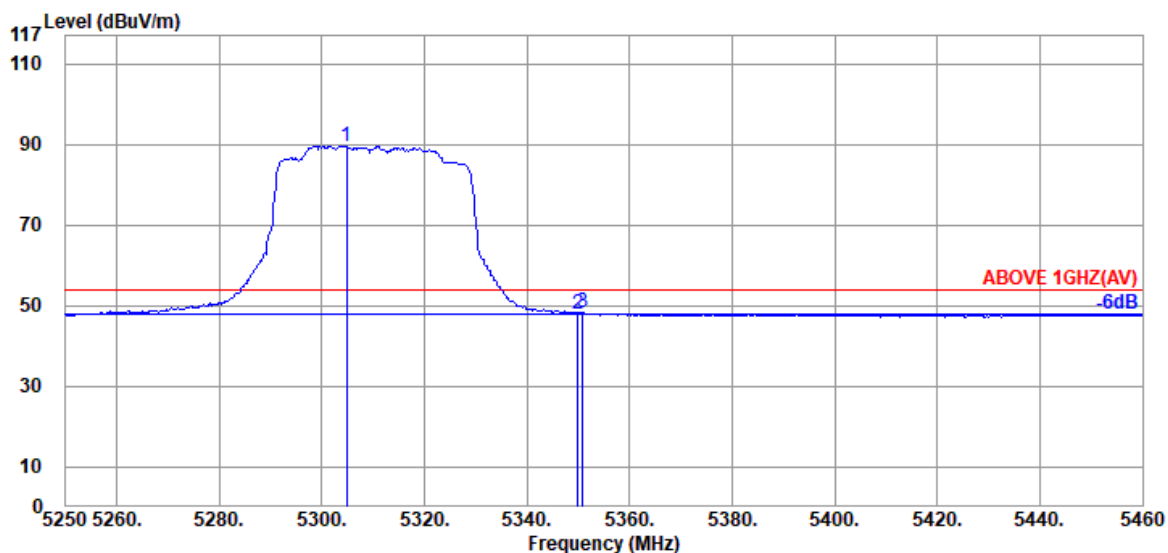

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.810	34.50	9.05	39.28	85.33	89.60	---	---	Average
5349.960	34.80	9.10	39.27	43.47	48.10	54.00	5.90	Average
5350.800	34.80	9.10	39.27	43.52	48.15	54.00	5.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

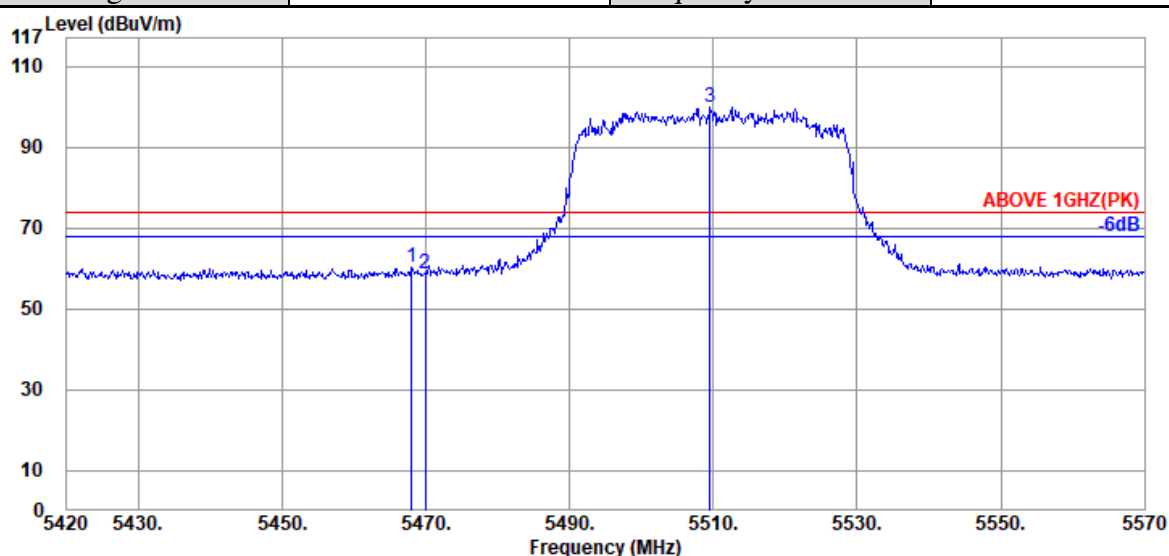

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.97	9.20	39.26	55.41	60.32	74.00	13.68	Peak
5469.950	34.97	9.20	39.26	53.64	58.55	74.00	15.45	Peak
@ 5509.550	34.90	9.23	39.26	95.13	100.00	---	---	Peak

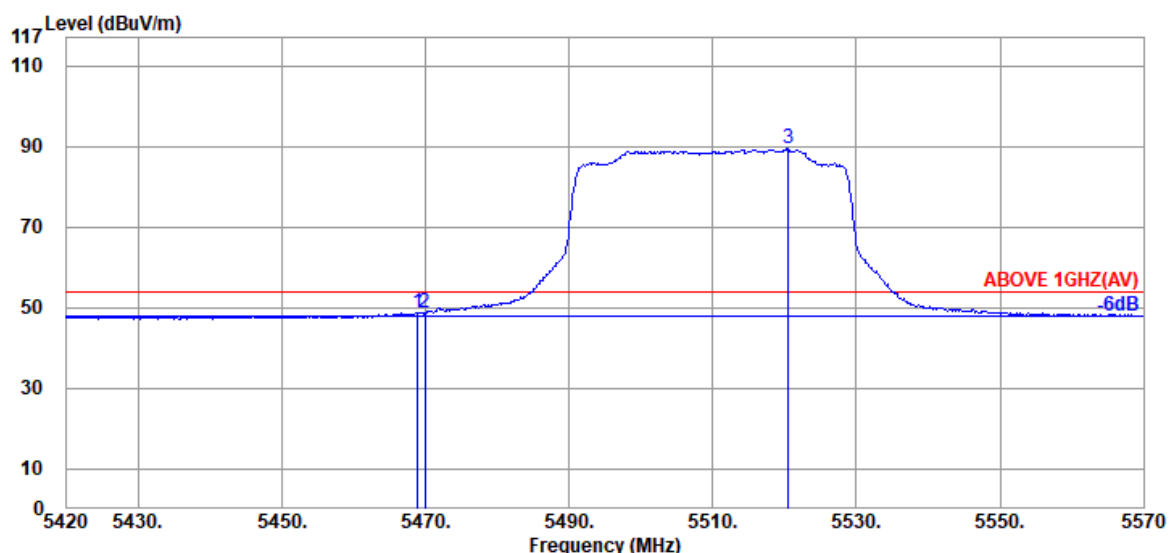


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	43.74	48.65	54.00	5.35	Average
5469.950	34.97	9.20	39.26	43.84	48.75	54.00	5.25	Average
@ 5520.500	34.87	9.24	39.26	84.44	89.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

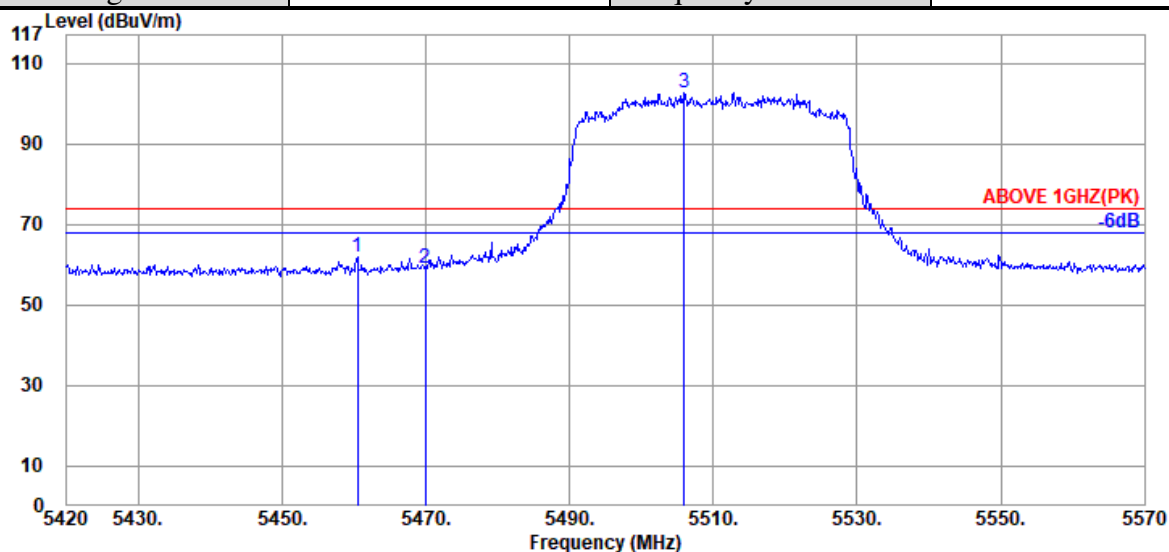

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	35.00	9.18	39.26	57.13	62.05	74.00	11.95	Peak
5469.950	34.97	9.20	39.26	54.24	59.15	74.00	14.85	Peak
@ 5505.950	34.90	9.23	39.26	97.91	102.78	---	---	Peak

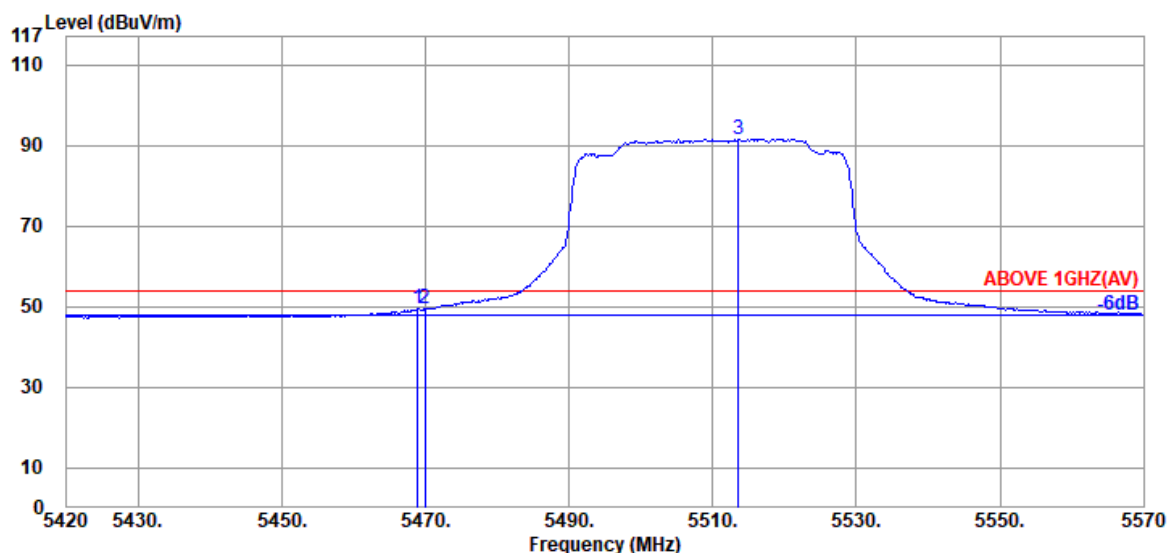

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.97	9.20	39.26	44.41	49.32	54.00	4.68	Average
5469.950	34.97	9.20	39.26	44.60	49.51	54.00	4.49	Average
@ 5513.600	34.87	9.24	39.26	86.66	91.51	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

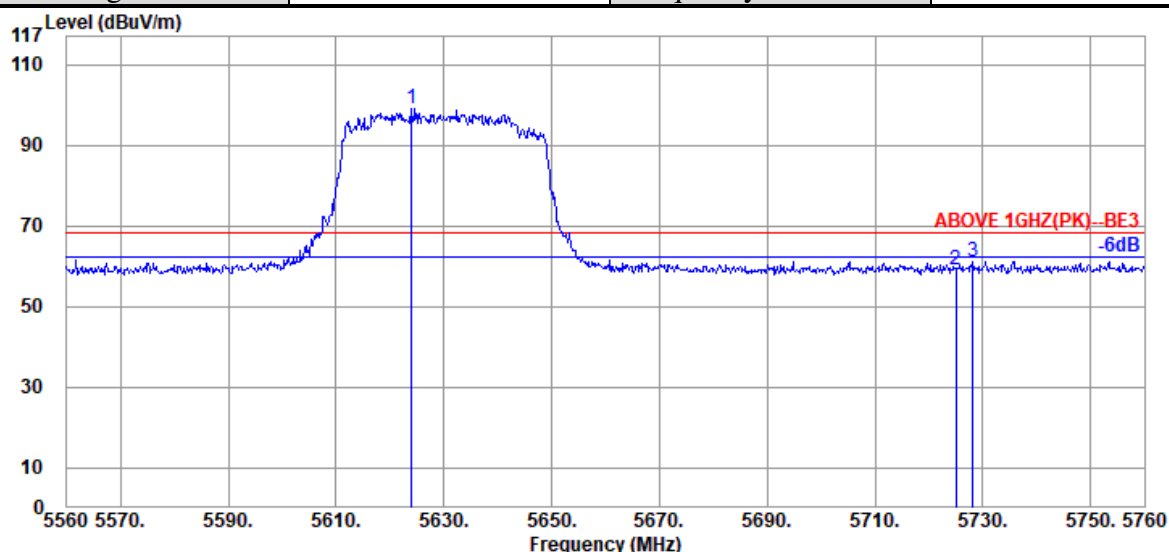

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.000	34.70	9.33	39.28	94.14	98.89	---	---	Peak
5725.000	34.57	9.42	39.30	54.21	58.90	68.20	9.30	Peak
5728.200	34.57	9.42	39.30	56.53	61.22	68.20	6.98	Peak

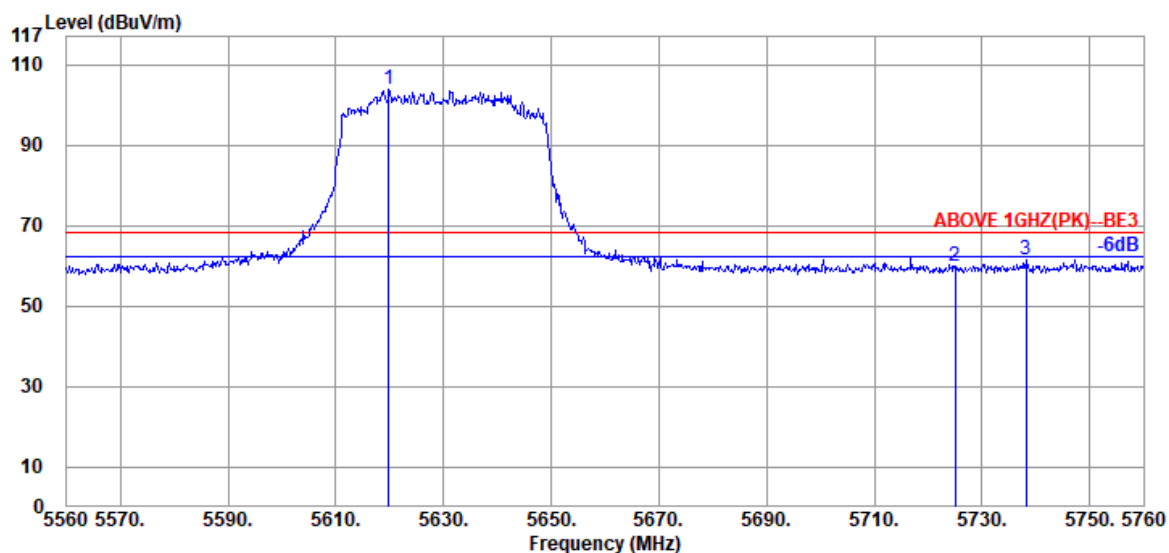

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.800	34.70	9.33	39.28	98.91	103.66	---	---	Peak
5725.000	34.57	9.42	39.30	55.19	59.88	68.20	8.32	Peak
5738.200	34.57	9.43	39.30	56.80	61.50	68.20	6.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2204124

Report Number: EM-F220276


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

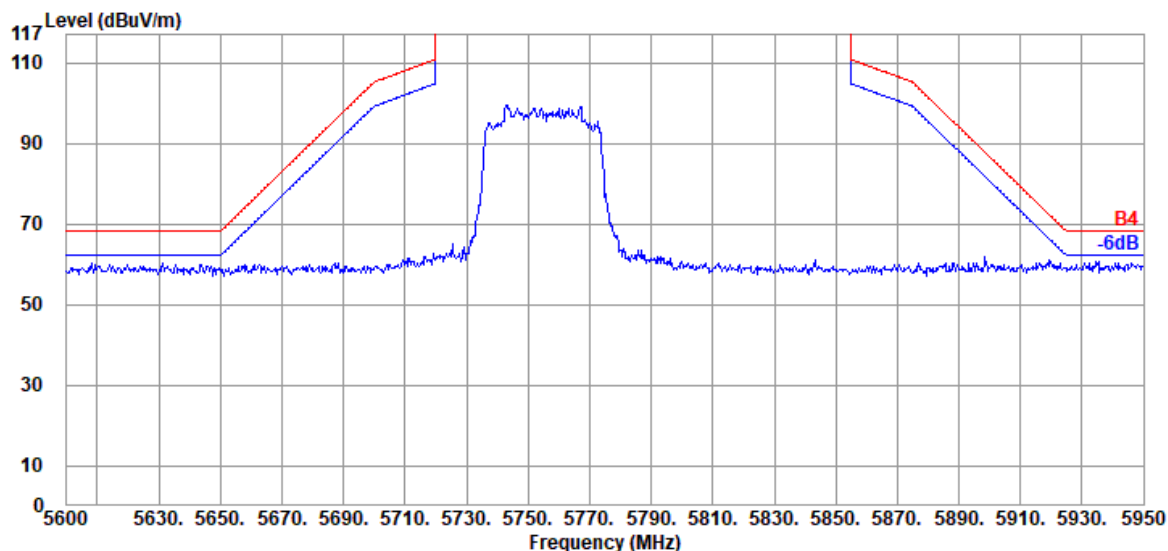

Antenna at Vertical Polarization

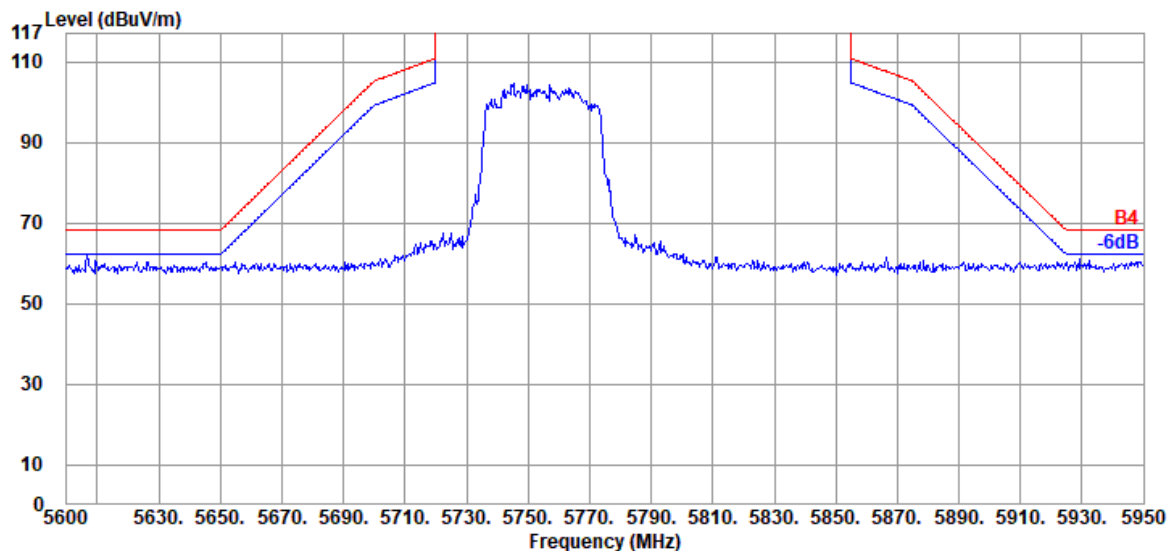


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

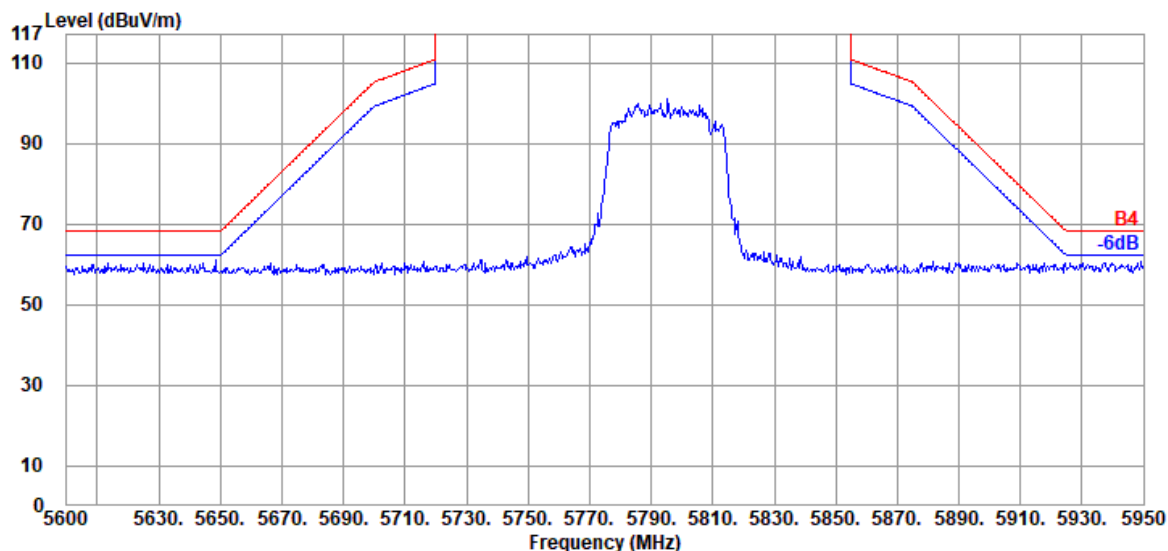


Antenna at Vertical Polarization

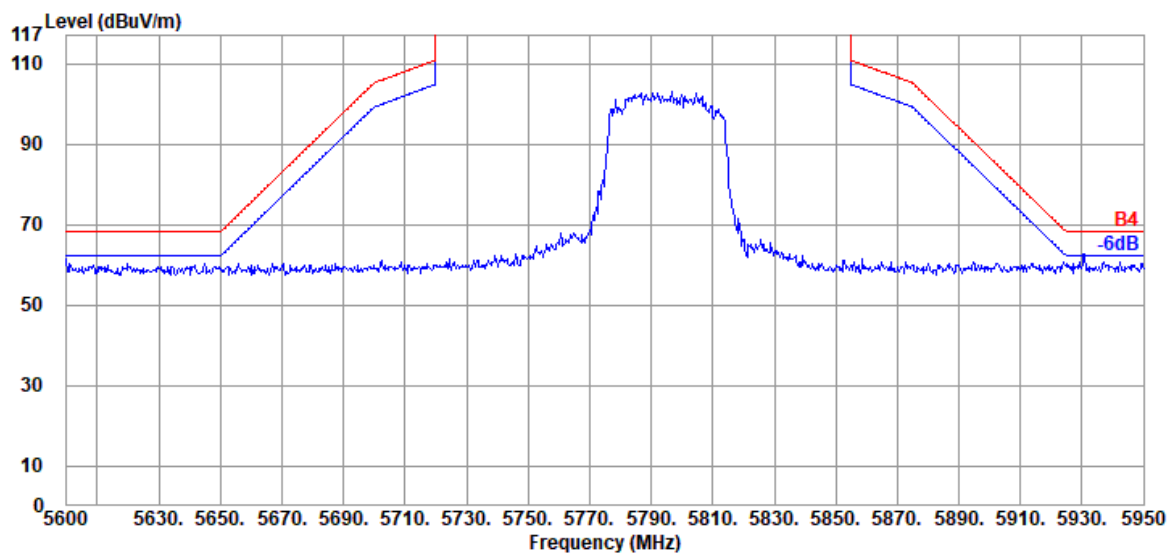

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

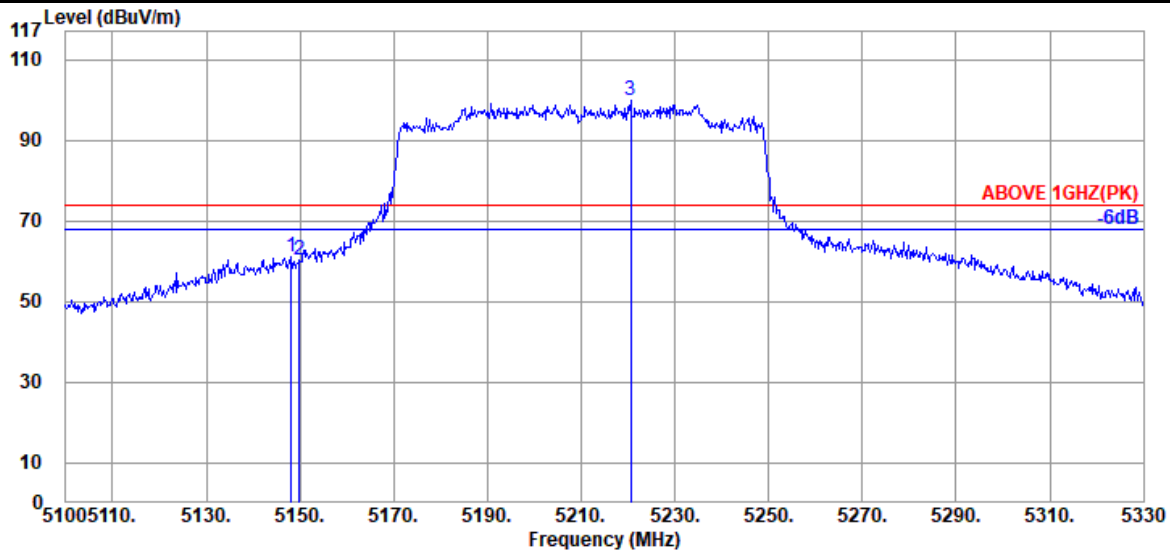

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.070	34.20	8.92	39.29	57.16	60.99	74.00	13.01	Peak
5149.910	34.20	8.92	39.29	56.50	60.33	74.00	13.67	Peak
@ 5220.520	34.40	8.98	39.28	95.92	100.02	---	---	Peak

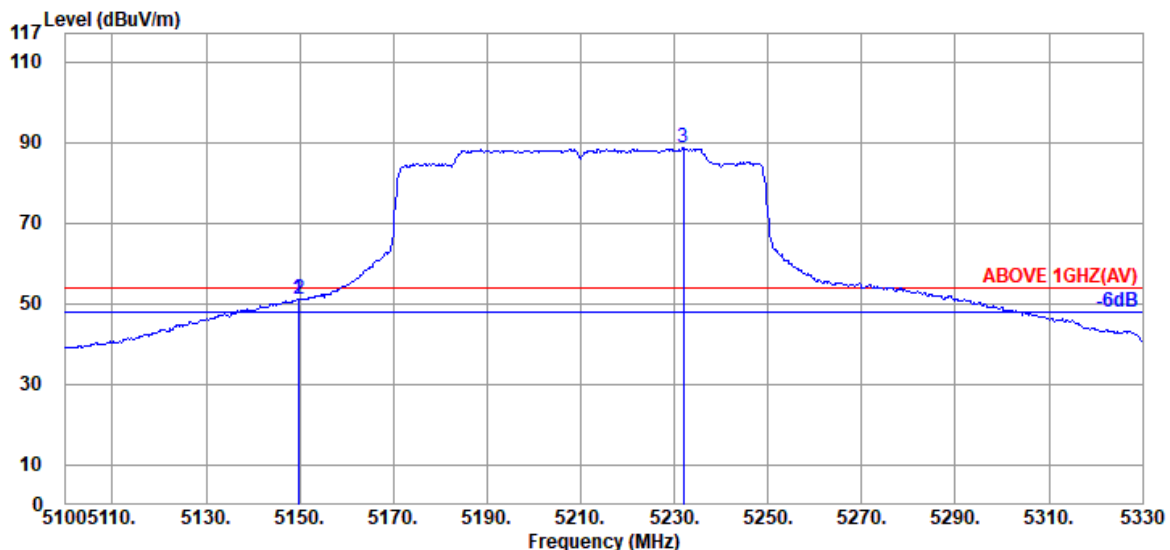

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	39.29	47.30	51.13	54.00	2.87	Average
5149.910	34.20	8.92	39.29	47.09	50.92	54.00	3.08	Average
@ 5232.020	34.40	8.99	39.28	84.42	88.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

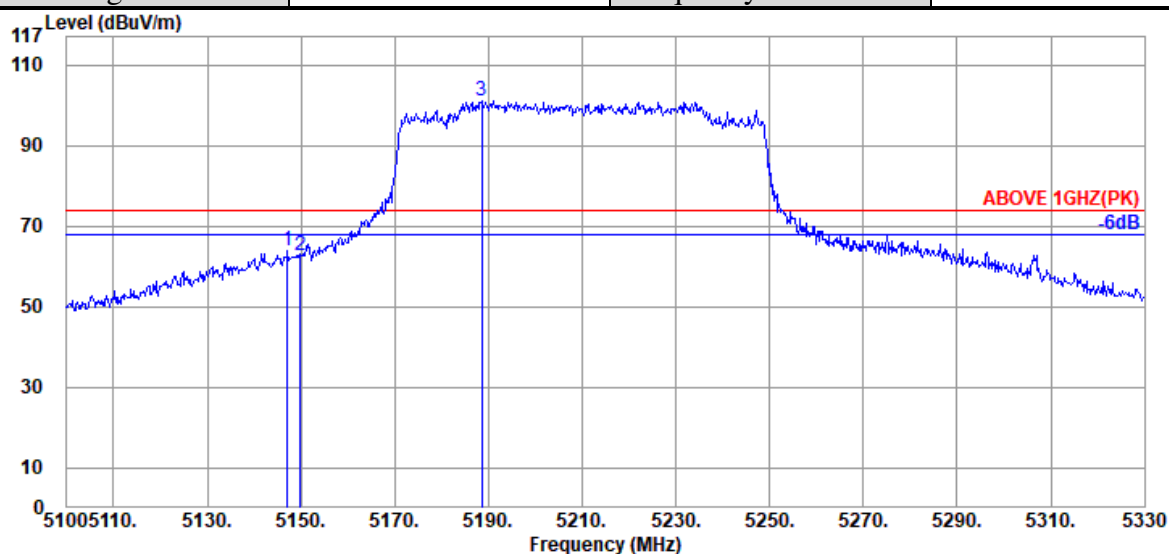

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.150	34.20	8.92	39.29	60.07	63.90	74.00	10.10	Peak
5149.910	34.20	8.92	39.29	58.88	62.71	74.00	11.29	Peak
@ 5188.550	34.40	8.95	39.28	97.02	101.09	---	---	Peak

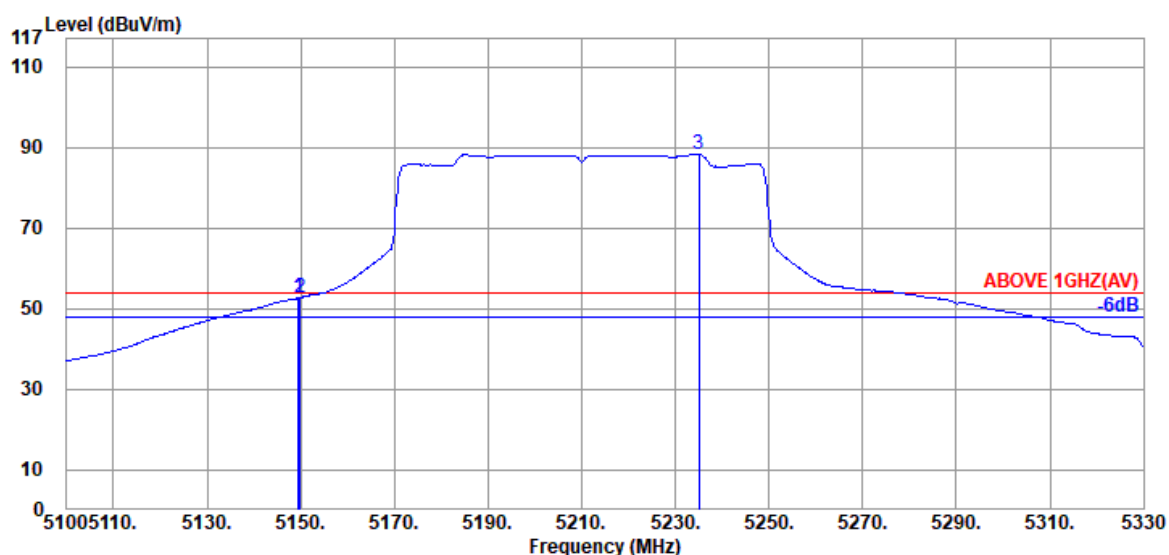

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.450	34.20	8.92	39.29	48.72	52.55	54.00	1.45	Average
5149.910	34.20	8.92	39.29	48.83	52.66	54.00	1.34	Average
@ 5235.010	34.40	8.99	39.28	84.10	88.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2204124

Report Number: EM-F220276

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

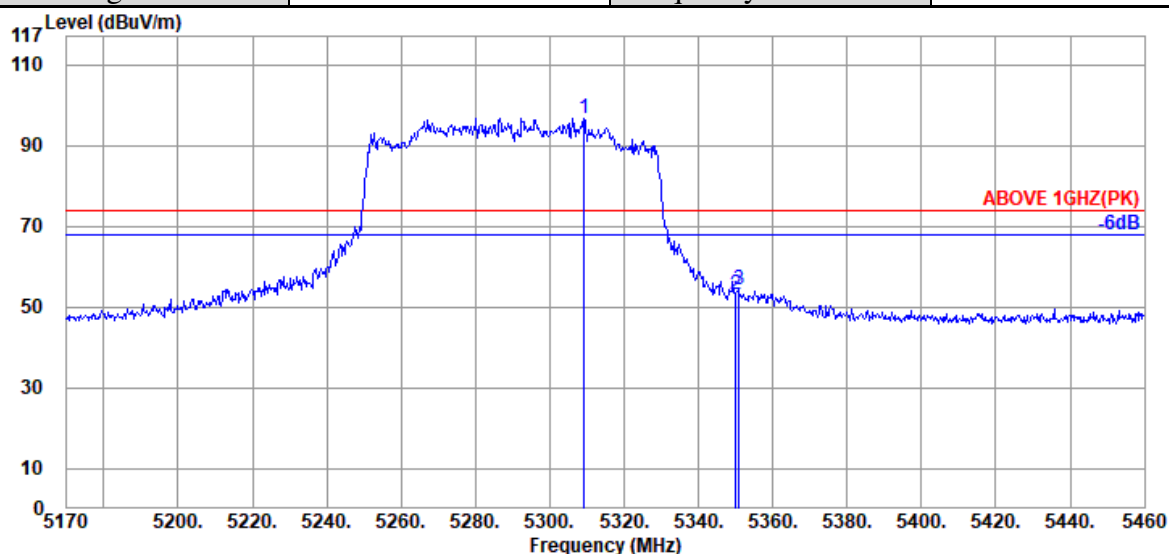

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.200	34.60	9.05	39.28	92.18	96.55	---	---	Peak
5350.090	34.80	9.10	39.27	48.34	52.97	74.00	21.03	Peak
5350.960	34.80	9.10	39.27	49.49	54.12	74.00	19.88	Peak

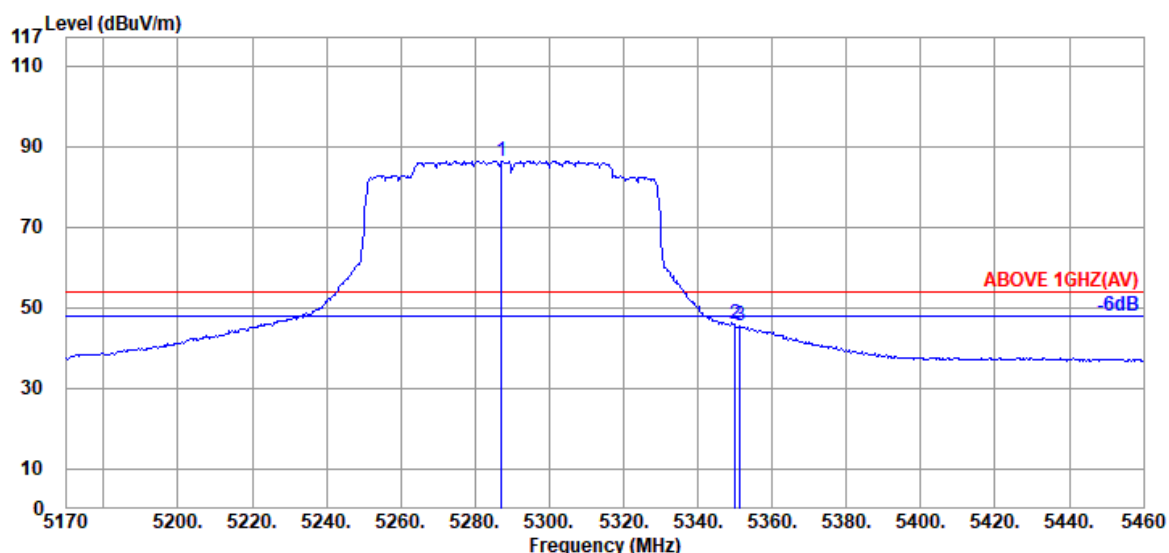

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.160	34.47	9.04	39.28	82.16	86.39	---	---	Average
5350.090	34.80	9.10	39.27	41.09	45.72	54.00	8.28	Average
5351.250	34.80	9.10	39.27	40.74	45.37	54.00	8.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

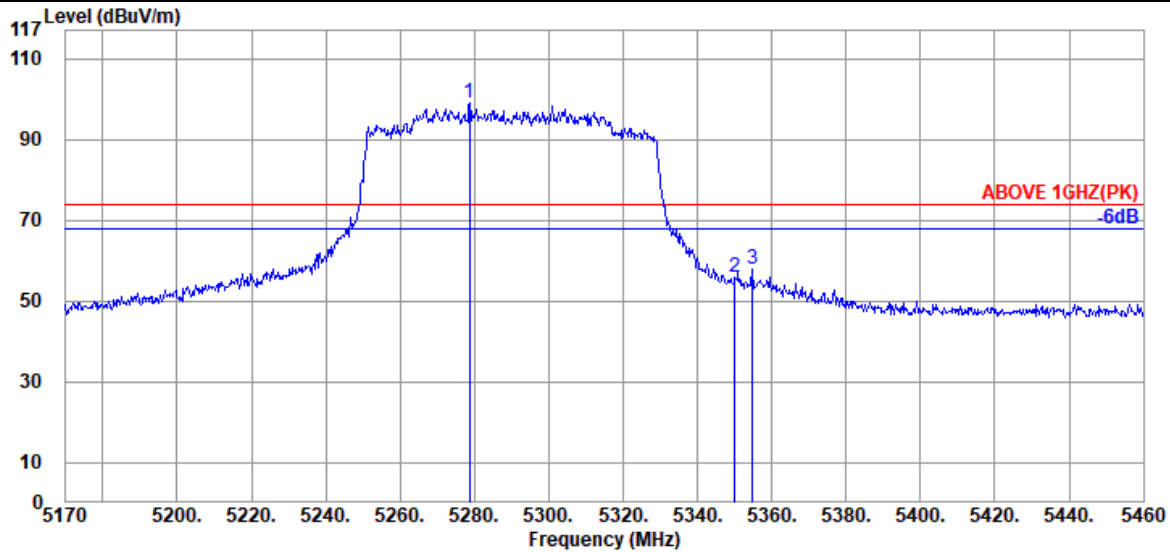

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.750	34.47	9.04	39.28	94.68	98.91	---	---	Peak
5350.090	34.80	9.10	39.27	51.19	55.82	74.00	18.18	Peak
5354.730	34.87	9.10	39.27	53.07	57.77	74.00	16.23	Peak

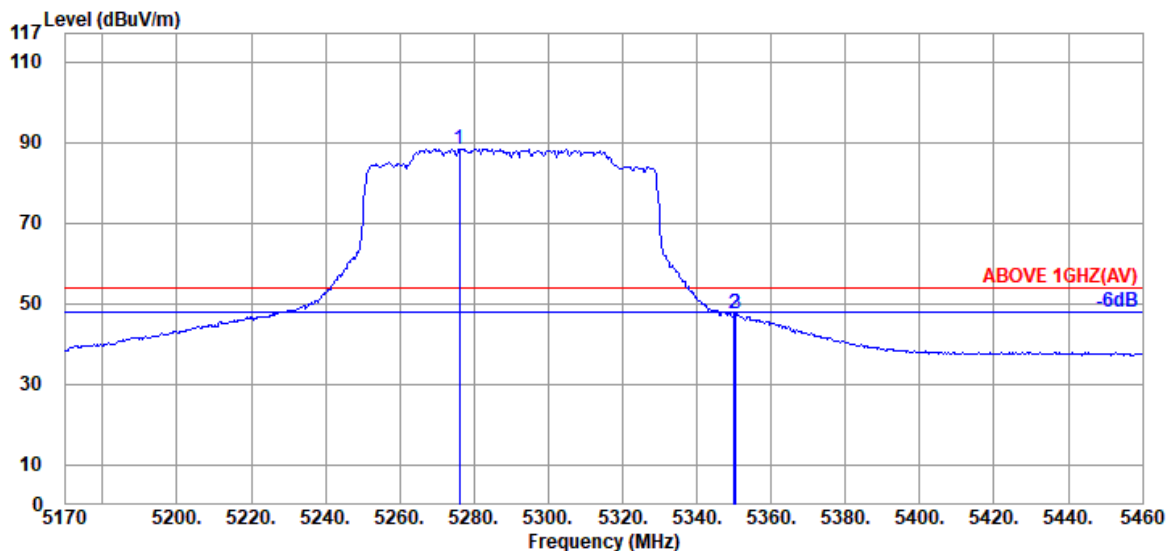

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.140	34.43	9.04	39.28	84.15	88.34	---	---	Average
5350.090	34.80	9.10	39.27	42.89	47.52	54.00	6.48	Average
5350.380	34.80	9.10	39.27	42.94	47.57	54.00	6.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

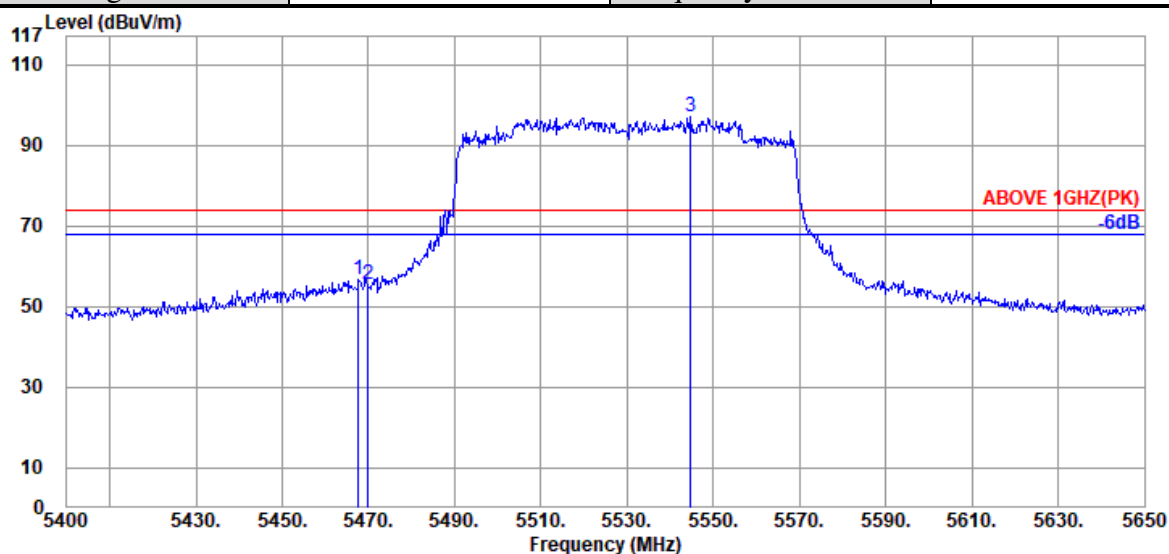

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.97	9.20	39.26	51.61	56.52	74.00	17.48	Peak
5470.000	34.97	9.20	39.26	50.64	55.55	74.00	18.45	Peak
@ 5544.750	34.80	9.26	39.27	92.43	97.22	---	---	Peak

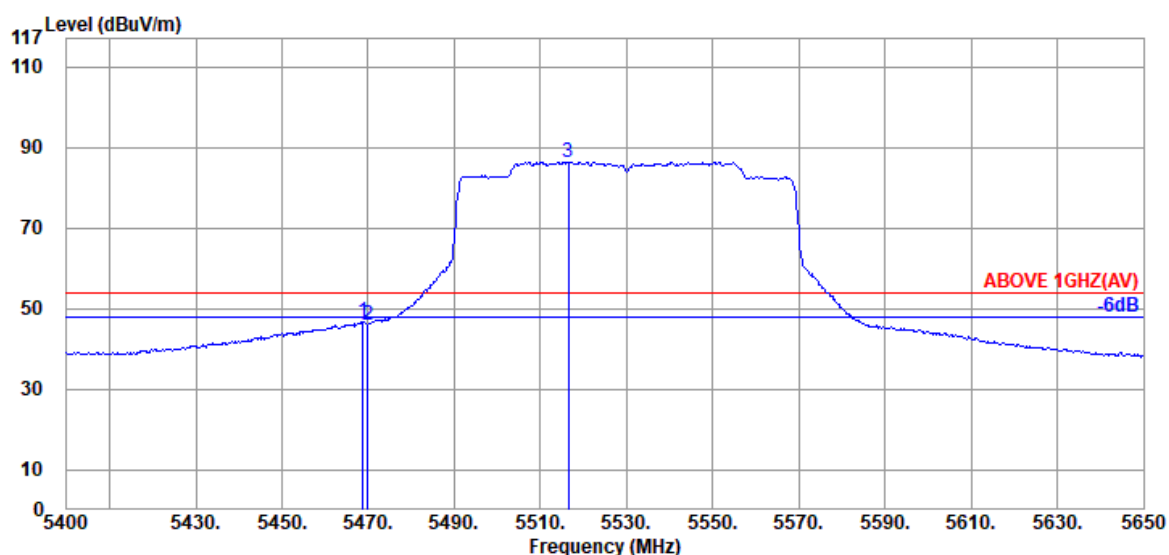

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.97	9.20	39.26	41.78	46.69	54.00	7.31	Average
5470.000	34.97	9.20	39.26	41.16	46.07	54.00	7.93	Average
@ 5516.500	34.87	9.24	39.26	81.53	86.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

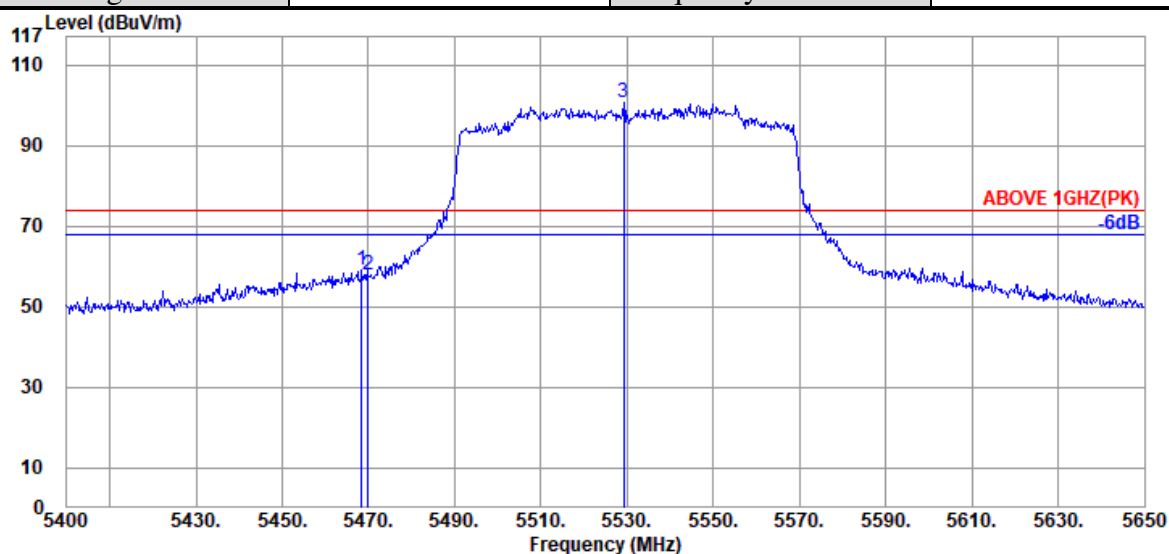

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.97	9.20	39.26	54.34	59.25	74.00	14.75	Peak
5470.000	34.97	9.20	39.26	53.17	58.08	74.00	15.92	Peak
@ 5529.250	34.83	9.24	39.27	95.73	100.53	---	---	Peak

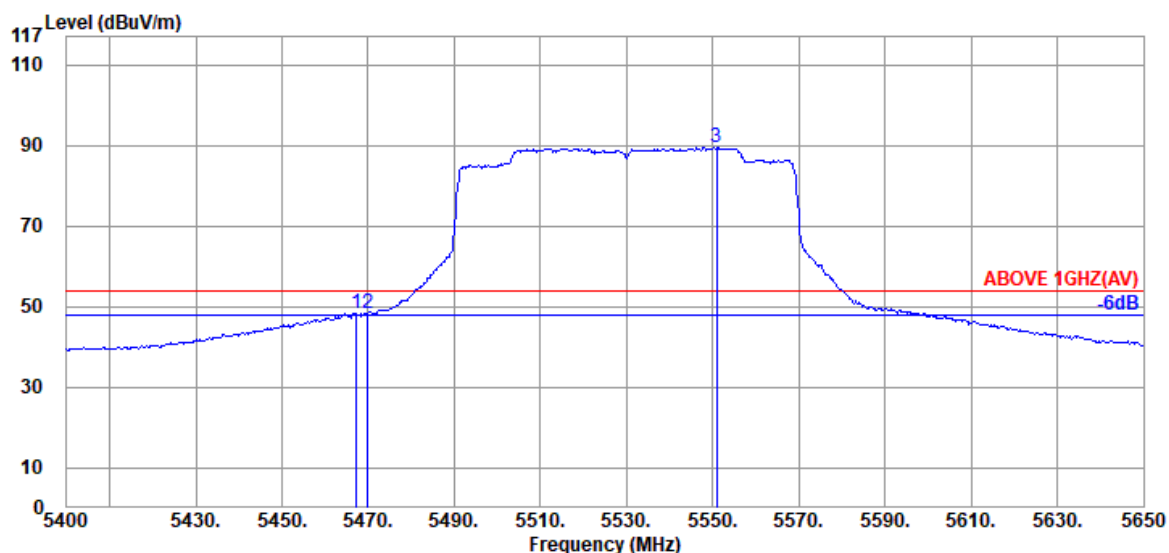

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.97	9.20	39.26	43.42	48.33	54.00	5.67	Average
5470.000	34.97	9.20	39.26	43.39	48.30	54.00	5.70	Average
@ 5551.000	34.80	9.27	39.27	84.57	89.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

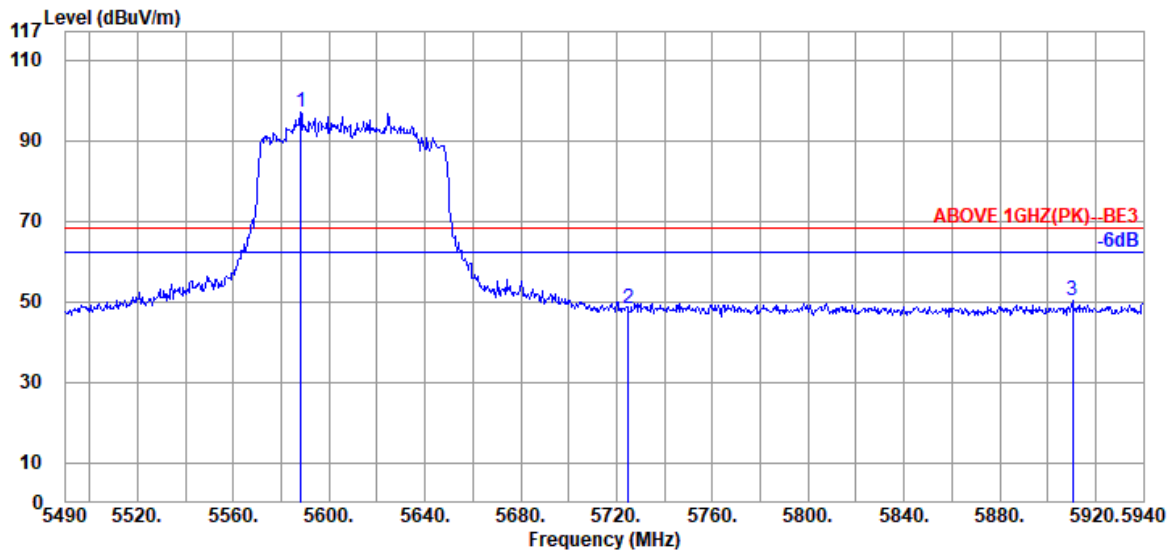

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5588.100	34.73	9.30	39.28	92.37	97.12	---	---	Peak
	5724.900	34.57	9.42	39.30	43.48	48.17	68.20	20.03	Peak
	5910.300	34.60	9.58	39.33	45.34	50.19	68.20	18.01	Peak

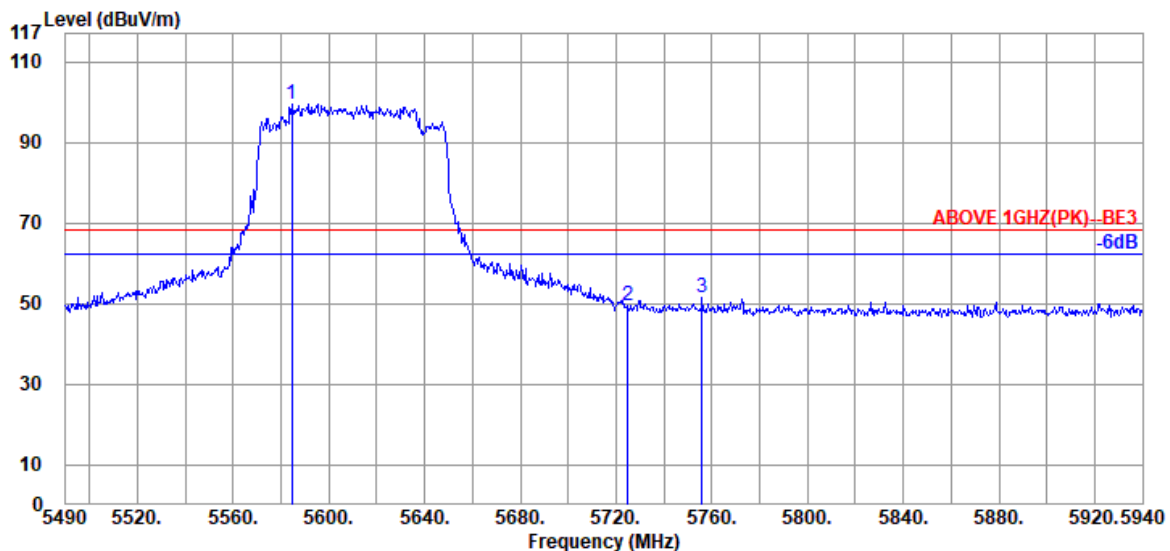

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5584.500	34.73	9.30	39.28	94.84	99.59	---	---	Peak
	5724.900	34.57	9.42	39.30	44.75	49.44	68.20	18.76	Peak
	5755.950	34.60	9.45	39.31	46.59	51.33	68.20	16.87	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.40	13.03	39.45	35.73	47.71	54.00	6.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.40	13.03	39.45	35.28	47.26	54.00	6.74	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	36.08	48.64	54.00	5.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	34.37	46.93	54.00	7.07	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	13.80	39.08	33.38	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	13.80	39.08	34.04	47.89	54.00	6.11	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	34.20	48.73	54.00	5.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	33.62	48.15	54.00	5.85	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.80	14.41	39.20	34.98	49.99	54.00	4.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.80	14.41	39.20	33.88	48.89	54.00	5.11	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	13.10	39.37	35.15	47.28	54.00	6.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	13.10	39.37	35.76	47.89	54.00	6.11	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	34.26	46.82	54.00	7.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	34.74	47.30	54.00	6.70	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	39.10	13.55	39.05	34.44	48.04	54.00	5.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	39.10	13.55	39.05	35.05	48.65	54.00	5.35	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	34.43	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	34.17	48.70	54.00	5.30	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	14.28	39.16	35.45	50.17	54.00	3.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	14.28	39.16	36.31	51.03	54.00	2.97	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.40	13.07	39.41	35.79	47.85	54.00	6.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.40	13.07	39.41	35.38	47.44	54.00	6.56	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.60	13.22	39.27	34.70	47.25	54.00	6.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.60	13.22	39.27	34.99	47.54	54.00	6.46	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.27	14.06	39.13	33.26	47.46	54.00	6.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.27	14.06	39.13	32.97	47.17	54.00	6.83	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	14.18	39.14	33.59	48.10	54.00	5.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	14.18	39.14	34.57	49.08	54.00	4.92	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	14.31	39.18	33.35	48.08	54.00	5.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	14.31	39.18	35.67	50.40	54.00	3.60	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	13.04	39.45	35.44	47.43	54.00	6.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	13.04	39.45	35.64	47.63	54.00	6.37	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	13.19	39.29	34.76	47.19	54.00	6.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	13.19	39.29	34.21	46.64	54.00	7.36	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	13.65	39.06	34.06	47.72	54.00	6.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	13.65	39.06	33.50	47.16	54.00	6.84	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	14.13	39.13	32.93	47.26	54.00	6.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	14.13	39.13	34.16	48.49	54.00	5.51	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	14.38	39.20	34.38	49.26	54.00	4.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	14.38	39.20	34.18	49.06	54.00	4.94	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	13.12	39.33	35.14	47.33	54.00	6.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	13.12	39.33	35.07	47.26	54.00	6.74	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	13.75	39.08	33.41	47.15	54.00	6.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	13.75	39.08	33.95	47.69	54.00	6.31	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	13.10	39.37	34.79	46.92	54.00	7.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	13.10	39.37	35.57	47.70	54.00	6.30	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	34.87	47.43	54.00	6.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	13.24	39.25	35.70	48.26	54.00	5.74	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	39.10	13.55	39.05	34.79	48.39	54.00	5.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	39.10	13.55	39.05	34.78	48.38	54.00	5.62	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	34.12	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	14.21	39.15	35.79	50.32	54.00	3.68	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11480.000	39.53	14.26	39.16	35.03	49.66	54.00	4.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11480.000	39.53	14.26	39.16	36.74	51.37	54.00	2.63	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.40	13.07	39.41	35.06	47.12	54.00	6.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.40	13.07	39.41	34.98	47.04	54.00	6.96	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	13.15	39.31	34.61	46.92	54.00	7.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	13.15	39.31	35.43	47.74	54.00	6.26	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	39.10	13.58	39.05	34.53	48.16	54.00	5.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	39.10	13.58	39.05	33.82	47.45	54.00	6.55	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	14.18	39.14	33.69	48.20	54.00	5.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	14.18	39.14	34.60	49.11	54.00	4.89	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	14.31	39.18	34.75	49.48	54.00	4.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	14.31	39.18	34.33	49.06	54.00	4.94	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	13.04	39.45	35.76	47.75	54.00	6.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	13.04	39.45	36.35	48.34	54.00	5.66	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	13.19	39.29	34.67	47.10	54.00	6.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	13.19	39.29	34.49	46.92	54.00	7.08	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	13.65	39.06	33.82	47.48	54.00	6.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	13.65	39.06	35.08	48.74	54.00	5.26	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	14.13	39.13	33.83	48.16	54.00	5.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	14.13	39.13	33.39	47.72	54.00	6.28	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	14.38	39.20	34.93	49.81	54.00	4.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	14.38	39.20	35.45	50.33	54.00	3.67	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	13.12	39.33	34.84	47.03	54.00	6.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	13.12	39.33	35.06	47.25	54.00	6.75	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	13.75	39.08	34.37	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	13.75	39.08	34.01	47.75	54.00	6.25	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.