

客戶名稱 : **LG 16Z90Q**
CUSTOMER

Document No.: _____
Approval Sheet Rev.: **A0**
Spec. Rev. : _____

承認書
APPROVAL SHEET

產品品名/Product Model No. : **WA-P-LELE-04-009**

客戶料號/Customer No. : **EAA65976701**

發行日期/ Issue Date : **2021/08/30**

承認日期/ Approved Date : _____

Approved by customer: (signing or stamping here)



■ 蘇州市相城區黃埭鎮潘陽工業園區中心大道5號

No.5,zhongxin Road, PanYang industrial
Park,HuangDai town,XiangCheng
district ,Suzhou City

□ 350 苗栗縣竹南鎮公義里11鄰科義街11號
電話：037-585-555
傳真：037-585-511

No. 11, Ke-Yi St., Chunan, Miaoli 350,
Taiwan, R.O.C.
Tel. : +886-37-585-555
Fax : +886-37-585-511

WA-P-LELE-04-009 Specification

1. Explanation of part number :

WA - P - LELE - 04 - 009
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) PCB: PCB

(3) Frequency : 2400~2500MHz&5100~5800MHz&5925~7125MHz

(4) Coaxial Cable Type : With \$ 0.81 Main Black / AUX Gray

(5) Suffix : 009

2. Storage Condition:

Temperature -40 to +70℃
Humidity 20 to 65 %RH

3. Operating Condition:

Temperature -40 to +70℃
Humidity 10 to 85 %RH

4. Electrical Specification :

*Those specifications were specially defined for **LG 16Z90Q** WIFI model, and all characteristics were measured under the model's handset testing jig .*

4-1. Frequency Band:

Frequency Band	MHz
WIFI\BT	2400~2500 & 5100~5800 & 5925~7125

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: 张涛	CHECKED BY: 张涛	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY : 胡志清	APPROVED BY : 徐克文	
TITLE : WA-P-LELE-04-009 Specification		DOCUMENT NO.
		PAGE REV. P3

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. VSWR

4-4.1 Measuring Method


1.A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR

2.Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value


VSWR	Frequency (Unit MHz)	Spec	1	2	3	4	5
Main Antenna	2400	≤3.5	1.3	1.3	1.3	1.3	1.3
	2500	≤3.5	2.1	2.1	2.1	2.2	2.2
	5150	≤4.0	2.4	2.6	2.3	2.3	2.5
	7125	≤4.0	2.6	2.8	2.7	2.6	2.6
	Judgement		ok	ok	ok	ok	ok
Aux Antenna	2400	≤3.5	2.0	2.2	2.0	2.0	2.0
	2500	≤3.5	1.6	1.6	1.7	1.8	1.7
	5150	≤4.5	2.6	2.6	2.6	2.5	2.6
	7125	≤4.5	2.3	2.2	2.2	2.2	2.3
	Judgement		ok	ok	ok	ok	ok

Main Antenna-1



AUX Antenna-1

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: 张涛	CHECKED BY: 张涛	
DESIGNED BY : 胡志清	APPROVED BY : 徐克文	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
TITLE : WA-P-LELE-04-009 Specification		DOCUMENT NO.
		PAGE REV. P3




4-5. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

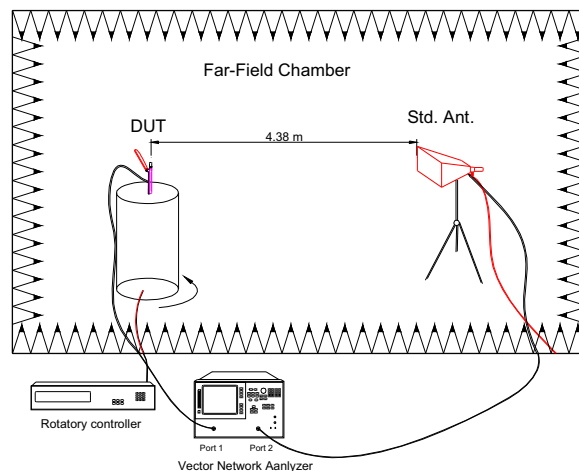

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张涛	CHECKED BY: 张涛		
DESIGNED BY : 胡志清	APPROVED BY : 徐克文		
TITLE : WA-P-LELE-04-009 Specification		DOCUMENT NO	PAGE REV. P3

4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

4-5.3-1 Electrical specification

Frequency (MHz)	Average Efficiency (%)
2400~2500	>30
5100~5825	>30

4-5.3-2 Efficiency and Gain Test Data

Frequency(MHz)	Main Antenna-1		
	Peak Gain (dBi)	Efficiency (dBi)	Efficiency(%)
2400	2.3	-5.0	31.7
2450	2.4	-4.7	33.8
2500	3.2	-4.4	36.6
5150	4.2	-3.9	40.3
5400	4.2	-3.9	41.2
5850	4.4	-3.7	42.5
5925	4.1	-4.0	39.7
6525	4.1	-4.3	37.0
7125	4.2	-4.5	35.6

Frequency(MHz)	AUX Antenna-1		
	Peak Gain (dBi)	Efficiency (dBi)	Efficiency(%)
2400	2.0	-4.8	33.2
2450	2.6	-4.6	34.7
2500	2.4	-4.9	32.7
5150	3.5	-4.5	35.3
5400	3.6	-4.5	35.4
5850	3.5	-4.4	36.3
5925	3.4	-4.6	34.6
6525	3.2	-4.8	33.1
7125	2.3	-4.8	32.8

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY: 胡志清 APPROVED BY: 徐克文

TITLE : WA-P-LELE-04-009 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
P3

4-5.3-3 Antenna 3D Radiation Pattern

Main Antenna-1

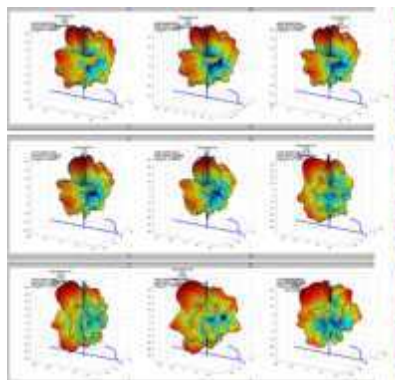

AUX Antenna-1

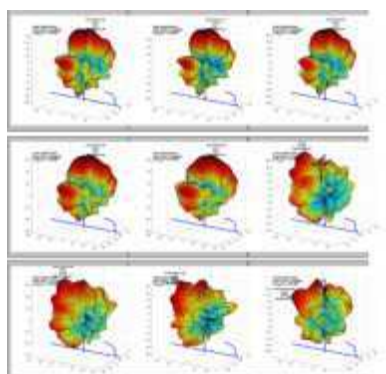

UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张涛	CHECKED BY: 张涛		
DESIGNED BY : 胡志清	APPROVED BY : 徐克文		
TITLE : WA-P-LELE-04-009 Specification		DOCUMENT NO.	PAGE REV.
			P3

Material list :

Item	Description	Material	Quantity
1	PCB AUX	FR4 40x6mm,T0.4mm	1
2	PCB MAIN	FR4 40x6mm,T0.4mm	1
3	Acetate Tape	Acetate Tape 21x7mm, T0.12mm	2
4	Shrink Tube	Shrink Tube black, ϕ 1.5 x10mm	1
5	Cable black	Cable 0.81 black	1
6	Cable gray	Cable 0.81 gray	1
7	Connector	I-PEX MHF 4L for 0.81, 20572	2
8	TAP	3M467 39*5mm	2
9	Clamp	Clamp 0.81 5mm	2

6. UL File No:

ITEM	DESCRIPTION	SUPPLIER	UL File No
1	PCB	HA0129	E202191
2	CABLE	HA0008	E318898
		HA0053	E464731

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY: 胡志清 APPROVED BY: 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-P-LELE-04-009 Specification

DOCUMENT
NO.

PAGE REV.
P3