


APPENDIX I

[Restricted Bands (VBW=3KHz) Measurement Result]

Total Pages : 8



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:02-26092133 Fax:02-26099303
 Email:temc@temc.com.tw

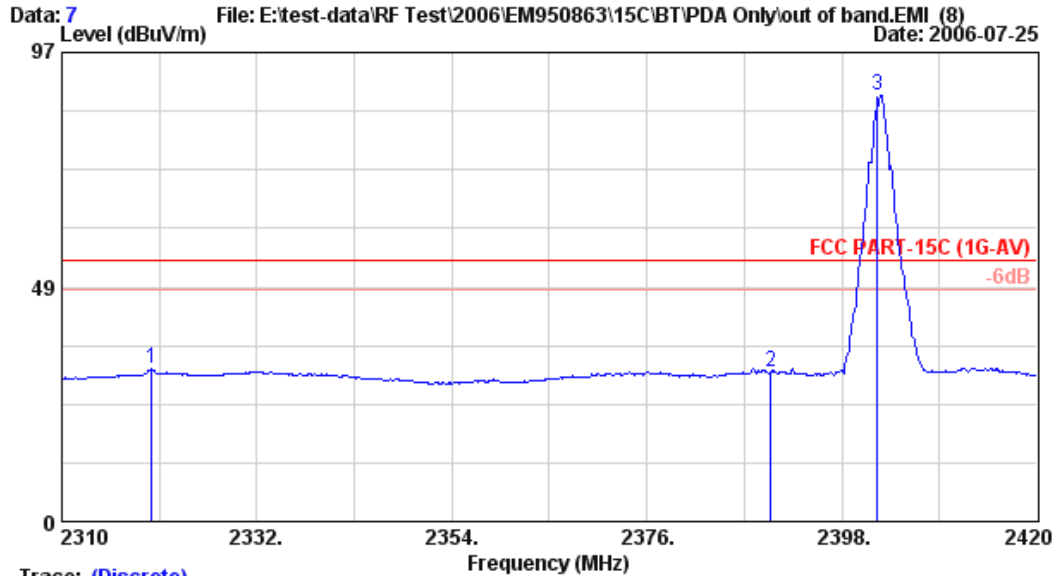


Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
 EUT : Personal Digital Assistant or Pocket PC
 Power Rating : 120Vac/60Hz
 Test Mode : CHO (Bluetooth) PDA+Charge
 M/N:HSTNH-L12C-BT
 VBW=3KHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2320.120	28.46	6.25	-3.22	31.49	54.00	22.51	Average
2	2390.000	28.59	6.34	-4.14	30.80	54.00	23.20	Average
3	2402.000	28.62	6.36	53.28	88.26	54.00	-34.26	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official
 limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

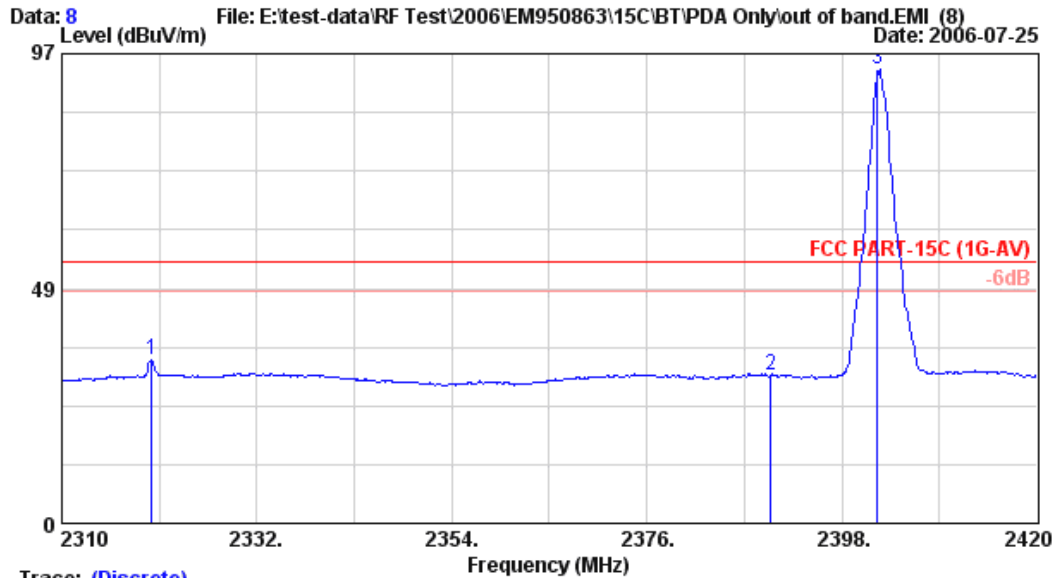

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 8
Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : 120Vac/60Hz
Test Mode : CHO (Bluetooth) PDA+Charge
M/N:HSTNH-L12C-BT
VBW=3KHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2320.120	28.46	6.25	-0.87	33.84	54.00	20.16	Average
2	2390.000	28.59	6.34	-4.44	30.50	54.00	23.50	Average
3	2402.000	28.62	6.36	58.65	93.63	54.00	-39.63	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

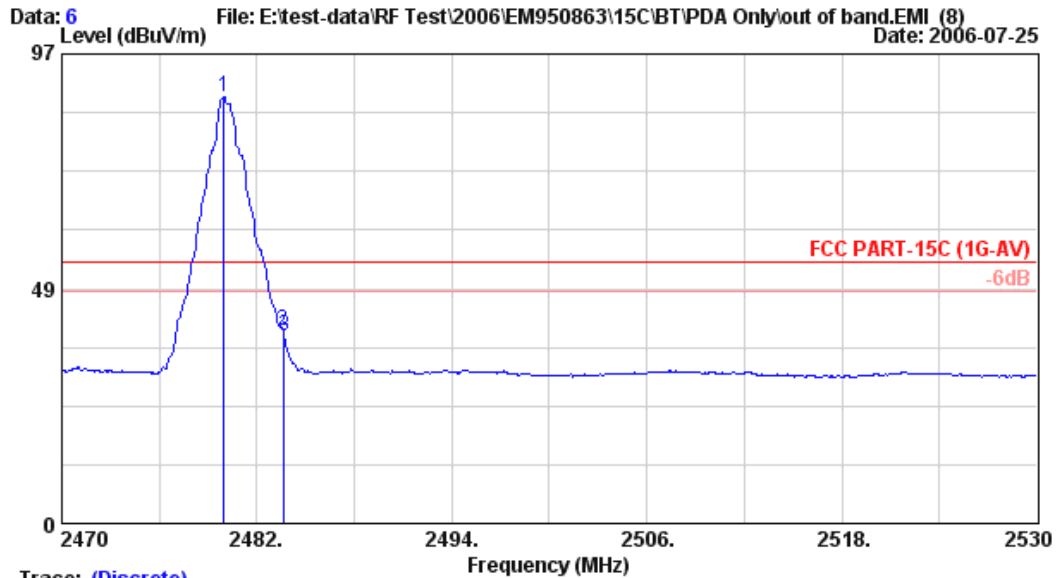

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 6
Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : 120Vac/60Hz
Test Mode : CH78 (Bluetooth) PD&+Charge
M/N: HSTNH-L12C-BT
VBW=3KHz

		Ant. Cable		Emission				
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2480.000	28.76	6.44	53.02	88.22	54.00	-34.22	Average	
2 2483.600	28.77	6.45	4.61	39.83	54.00	14.17	Average	
3 2483.680	28.77	6.45	3.64	38.86	54.00	15.14	Average	

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:02-26092133 Fax:02-26099303
 Email:ttemc@ttemc.com.tw

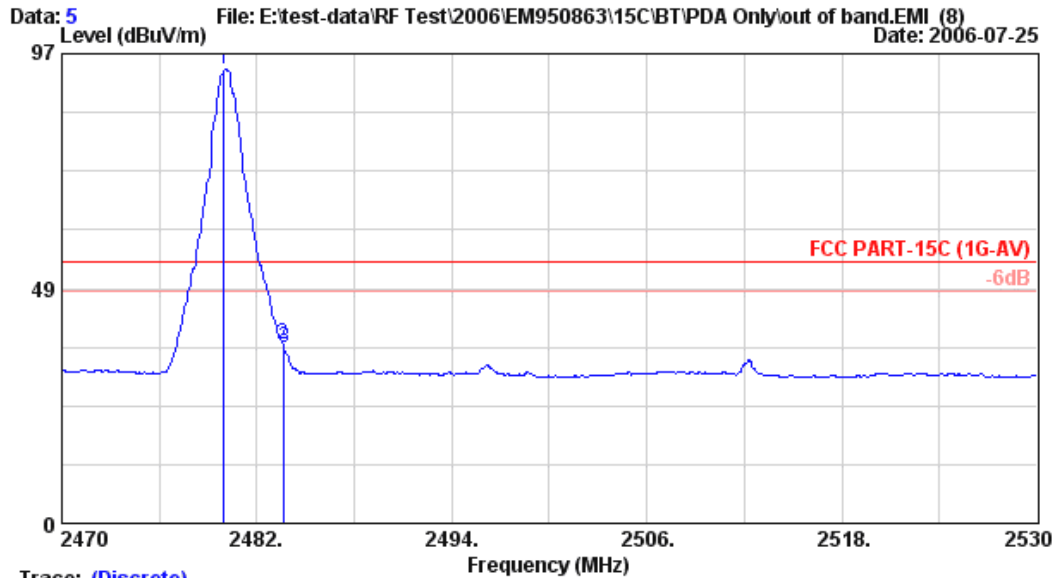

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
 EUT : Personal Digital Assistant or Pocket PC
 Power Rating : 120Vac/60Hz
 Test Mode : CH78 (Bluetooth) PDA+Charge
 M/N: HSTNH-L12C-BT
 VBW=3KHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.76	6.44	58.58	93.78	54.00	-39.78	Average
2	2483.600	28.77	6.45	1.58	36.80	54.00	17.20	Average
3	2483.680	28.77	6.45	0.88	36.11	54.00	17.89	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

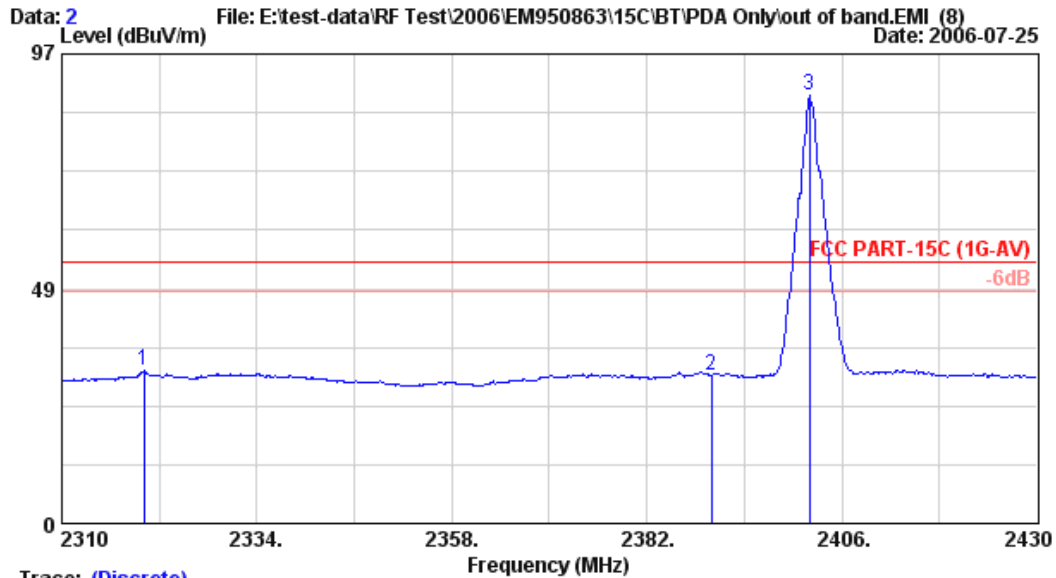

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 2
Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : DC 3.7V
Test Mode : CHO (Bluetooth) PDA Only
M/N:HSTNH-L12C-BT
VBW=3KHz

		Ant. Cable		Emission				
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2320.080	28.46	6.25	-3.20	31.51	54.00	22.49	Average	
2 2390.000	28.59	6.34	-4.42	30.52	54.00	23.48	Average	
3 2402.000	28.62	6.36	53.35	88.32	54.00	-34.32	Average	

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

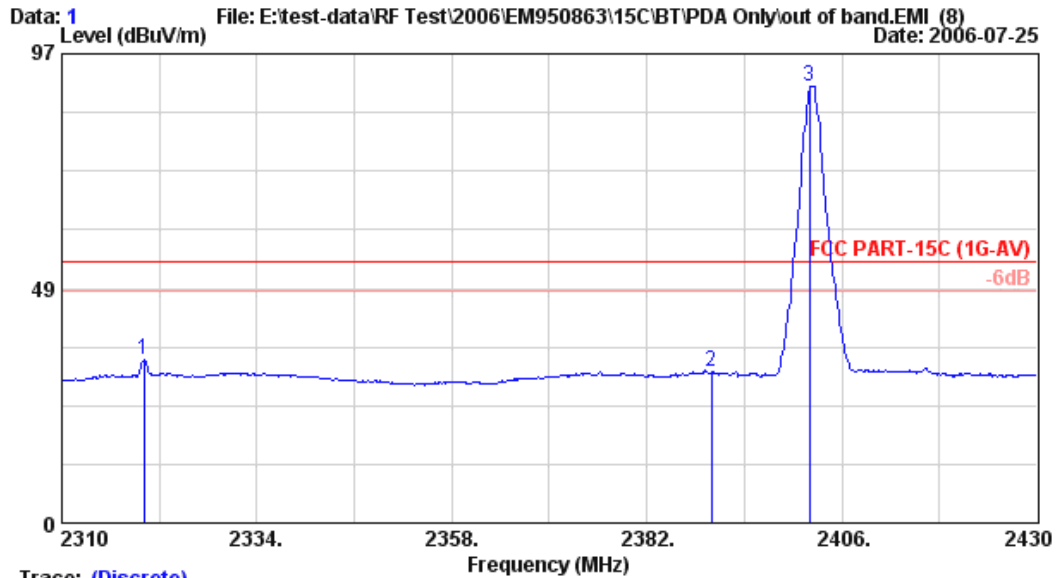

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 1
Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : DC 3.7V
Test Mode : CHO (Bluetooth) PD\ Only
M/N:HSTNH-L12C-BT
VBW=3KHz

	Freq.	Ant. Factor	Cable Loss	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2320.080	28.46	6.25	-0.97	33.74	54.00	20.26	Average
2	2390.000	28.59	6.34	-3.64	31.30	54.00	22.70	Average
3	2402.000	28.62	6.36	55.37	90.35	54.00	-36.35	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

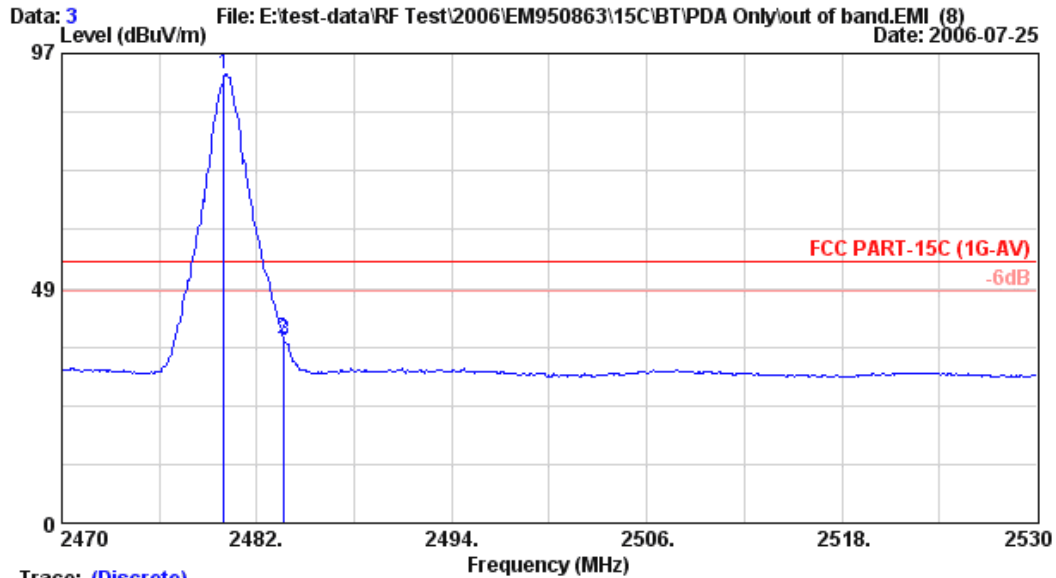

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 3
Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : DC 3.7V
Test Mode : CH78 (Bluetooth) PDA Only
M/N:HSTNH-L12C-BT
VBW=3KHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.76	6.44	57.53	92.73	54.00	-38.73	Average
2	2483.600	28.77	6.45	2.90	38.12	54.00	15.88	Average
3	2483.680	28.77	6.45	2.58	37.80	54.00	16.20	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:02-26092133 Fax:02-26099303
Email:ttemc@ttemc.com.tw

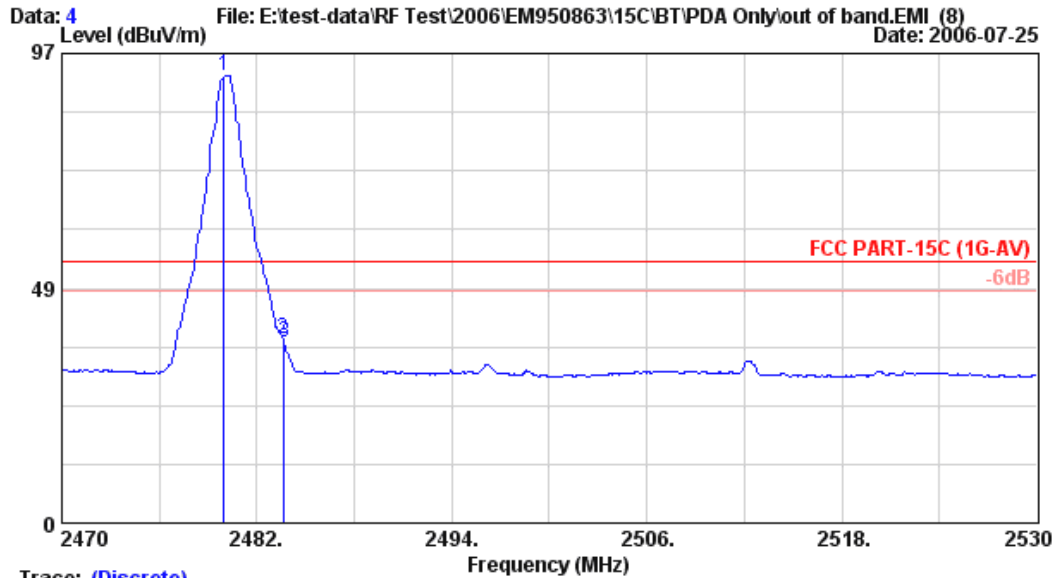

Trace: (Discrete)

Site no. : A/C Chamber Data no. : 4
Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : 8593EM 25°C/52% Engineer : Alvin_Yang
EUT : Personal Digital Assistant or Pocket PC
Power Rating : DC 3.7V
Test Mode : CH78 (Bluetooth) PDA Only
M/N:HSTNH-L12C-BT
VBW=3KHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.76	6.44	57.07	92.27	54.00	-38.27	Average
2	2483.600	28.77	6.45	2.79	38.01	54.00	15.99	Average
3	2483.680	28.77	6.45	1.93	37.15	54.00	16.85	Average

Remarks: 1. Emission Level=Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.