


ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-20D-RWD-001
Reception No. : 2011004289
Applicant : LG Electronics USA
Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States
Manufacturer : LG Electronics Inc.
Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
Type of Equipment : Premium Magic Remote
FCC ID. : BEJPM21GA
Model Name : PM21GA
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 47 pages (including this page)
Date of Incoming : November 24, 2020
Date of issue : December 01, 2020

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.



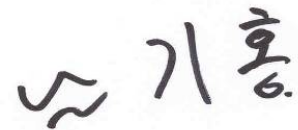

Tested by
 Hyung-Kwon, Oh / Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION.....	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	12
5.5 ANTENNA REQUIREMENT	12
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MINIMUM 6 DB BANDWIDTH.....	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST DATE	13
7.4 TEST DATA FOR PACKET LENGTH: 37 BYTE.....	14
7.5 TEST DATA FOR PACKET LENGTH: 255 BYTE.....	16
8. MAXIMUM PEAK OUTPUT POWER.....	18
8.1 OPERATING ENVIRONMENT	18
8.2 TEST SET-UP	18
8.3 TEST DATE	18
8.4 TEST DATA FOR PACKET LENGTH: 37 BYTE.....	19

8.5 TEST DATA FOR PACKET LENGTH: 255 BYTE.....21

9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....23

9.1 OPERATING ENVIRONMENT23

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT23

9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....23

9.4 TEST DATE23

9.5 TEST DATA FOR CONDUCTED EMISSION24

 9.5.1 Test data for Packet Length: 37 Byte24

 9.5.2 Test data for Packet Length: 255 Byte29

9.6 TEST DATA FOR RADIATED EMISSION34

 9.6.1 Radiated Emission which fall in the Restricted Band.....34

 9.6.2 Spurious & Harmonic Radiated Emission.....36

10. PEAK POWER SPECTRAL DENSITY38

10.1 OPERATING ENVIRONMENT38

10.2 TEST SET-UP38

10.3 TEST DATE38

10.4 TEST DATA FOR PACKET LENGTH: 37 BYTE.....39

10.5 TEST DATA FOR PACKET LENGTH: 255 BYTE.....41

11. RADIATED EMISSION TEST43

11.1 OPERATING ENVIRONMENT43

11.2 TEST SET-UP43

11.3 TEST DATE44

11.4 TEST DATA45

 11.4.1 Test data for 30 MHz ~ 1 GHz45

 11.4.2 Test data for Below 30 MHz.....46

 11.4.3 Test data for above 1 GHz46

12. LIST OF TEST EQUIPMENT47

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-20D-RWD-001	December 01, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States
 Contact Person : Dae Woong, Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : +201-266-2215
 FCC ID : BEJPM21GA
 Model Name : PM21GA
 Brand Name : -
 Serial Number : N/A
 Date : December 01, 2020

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Premium Magic Remote
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC Battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model PM21GA (referred to as the EUT in this report) is a Premium Magic Remote. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Premium Magic Remote
Temperature Range	0 °C ~ 40 °C
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	6.38 dBm (Packet Length: 37 Byte)
	7.32 dBm (Packet Length: 255 Byte)
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	-2.81 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc.	PNCFA1533A	N/A
Wheel Board	LG Electronics Inc.	PLCFA1435A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
PM21GA	LG Electronics Inc.	Premium Magic Remote (EUT)	-
HP ProtectSmart	HP	Notebook PC	Jig Board
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adaptor	Notebook PC
SC9-V-O	N/A	Jig Board	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

- Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE Packet Length: 37 Byte	0.406	0.628	64.65	1.89
Bluetooth LE Packet Length: 255 Byte	2.15	2.50	86.00	0.66


Note – Duty Cycle : $(Tx\ On\ Time / (Tx\ On\ Time + Tx\ Off\ Time)) * 100$

Correction Factor : $10 * \log(1 / (Duty\ Cycle / 100))$

-. Test Plot

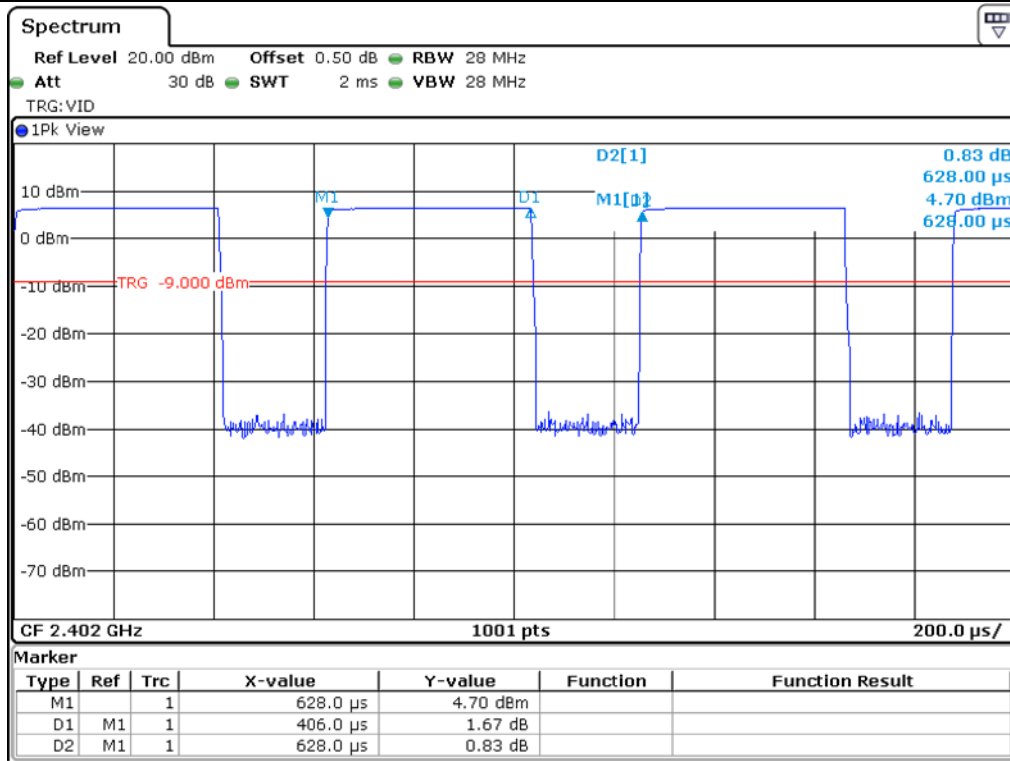

Bluetooth LE_ Packet Length: 37 Byte

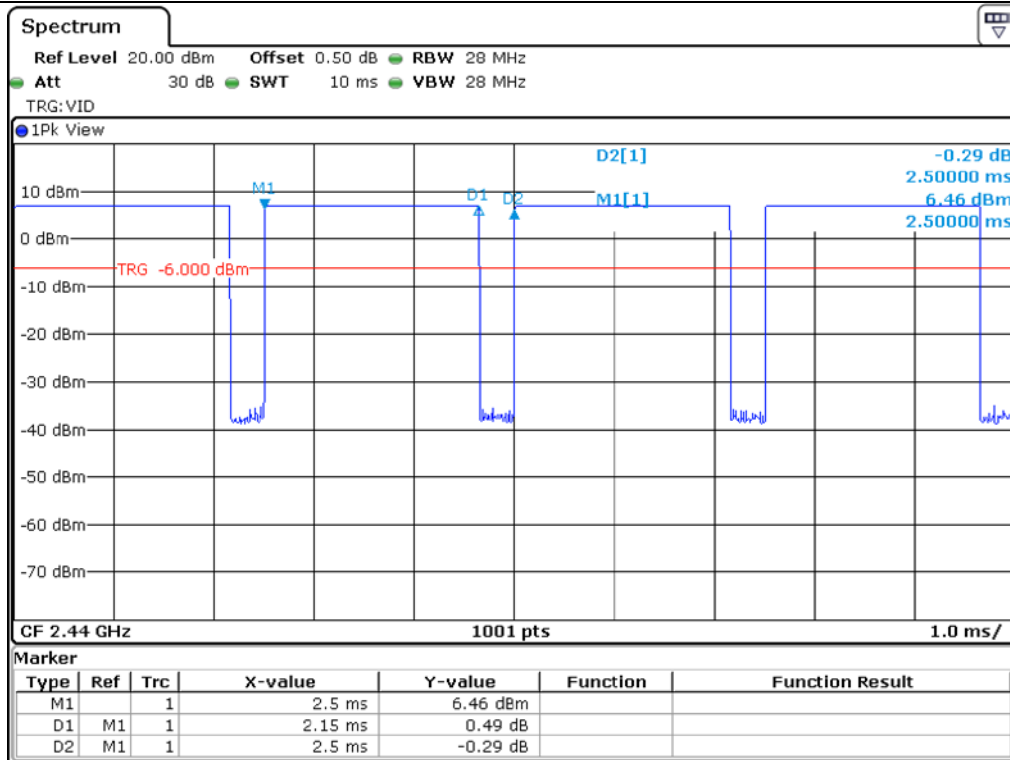

Bluetooth LE_ Packet Length: 255 Byte

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 10 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Battery.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

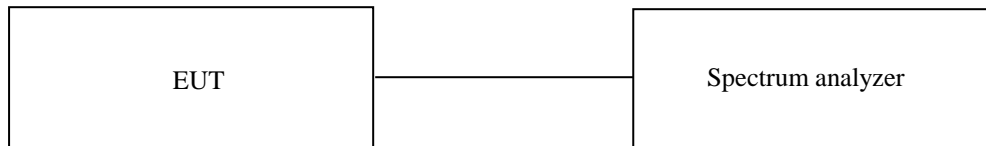

7.3 Test Date


November 24, 2020 ~ November 30, 2020


7.4 Test data for Packet Length: 37 Byte

-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	789.20	500.00	289.20
Middle	2 440.00	899.10	500.00	399.10
High	2 480.00	1004.00	500.00	504.00

Remark. Margin = Measured Value - Limit

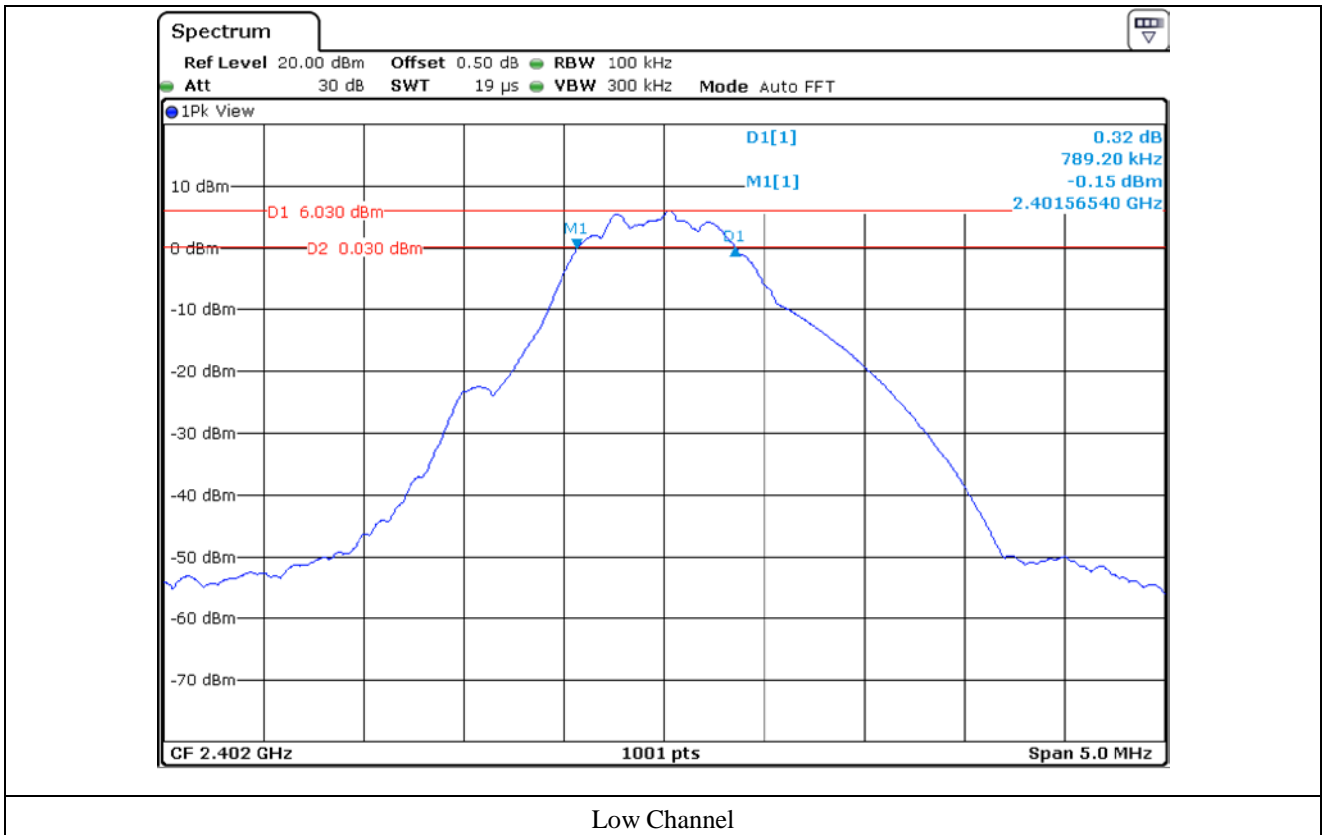

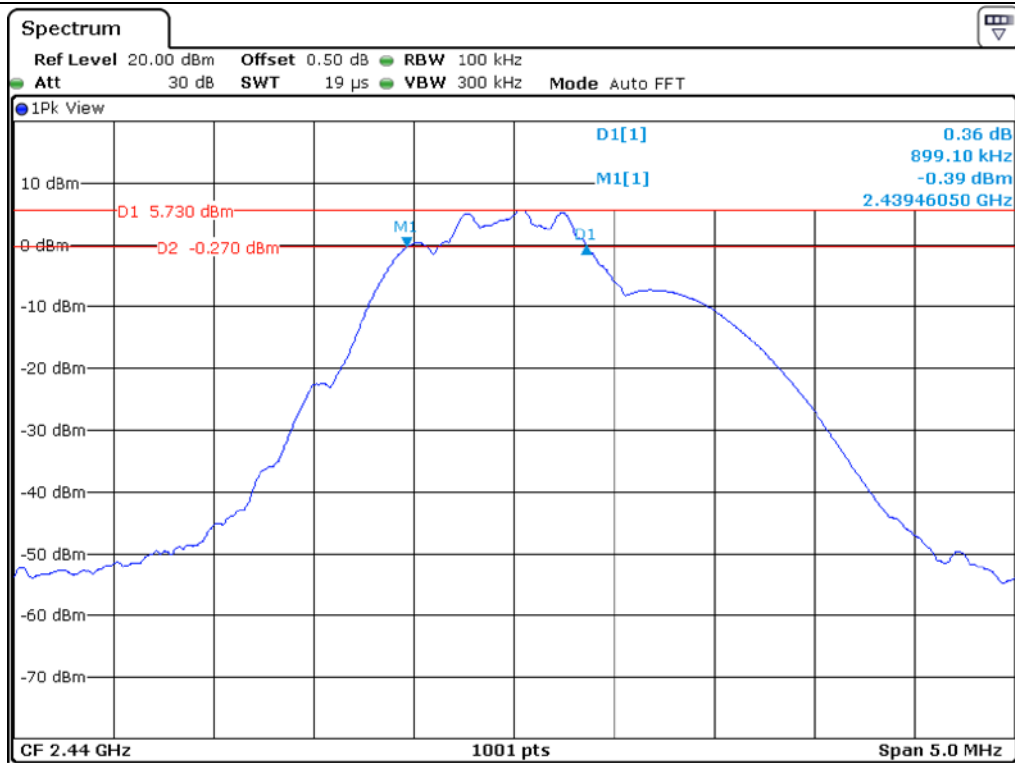

Middle Channel

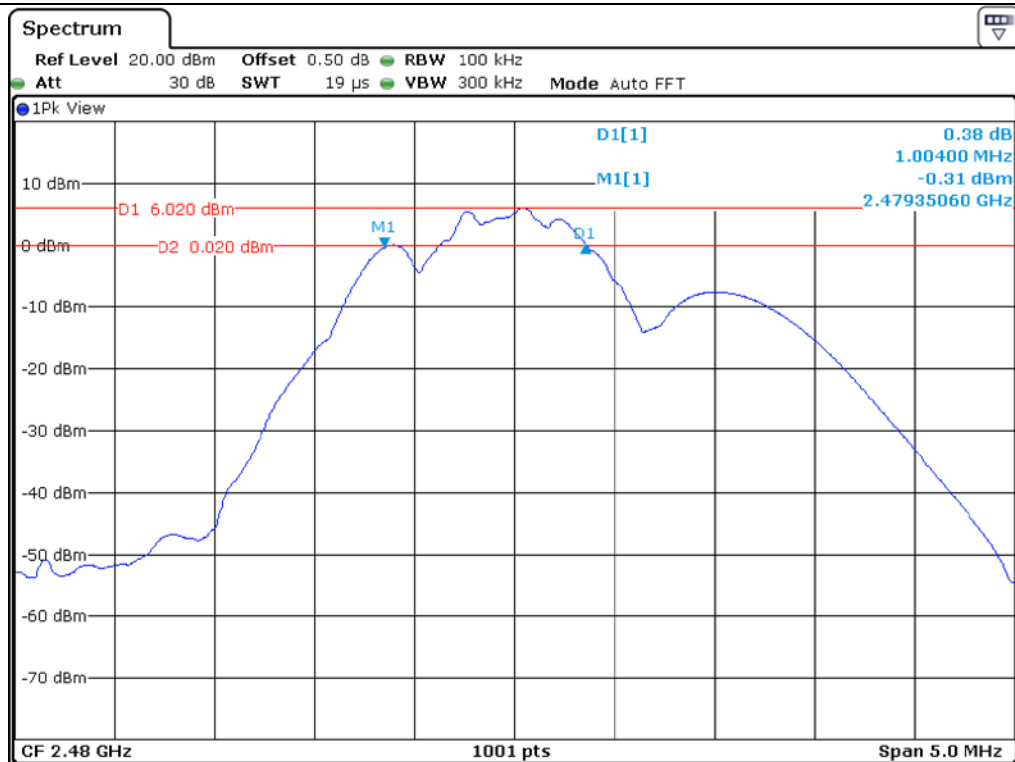


High Channel


7.5 Test data for Packet Length: 255 Byte

-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	804.20	500.00	304.20
Middle	2 440.00	734.30	500.00	234.30
High	2 480.00	769.20	500.00	269.20

Remark. Margin = Measured Value - Limit

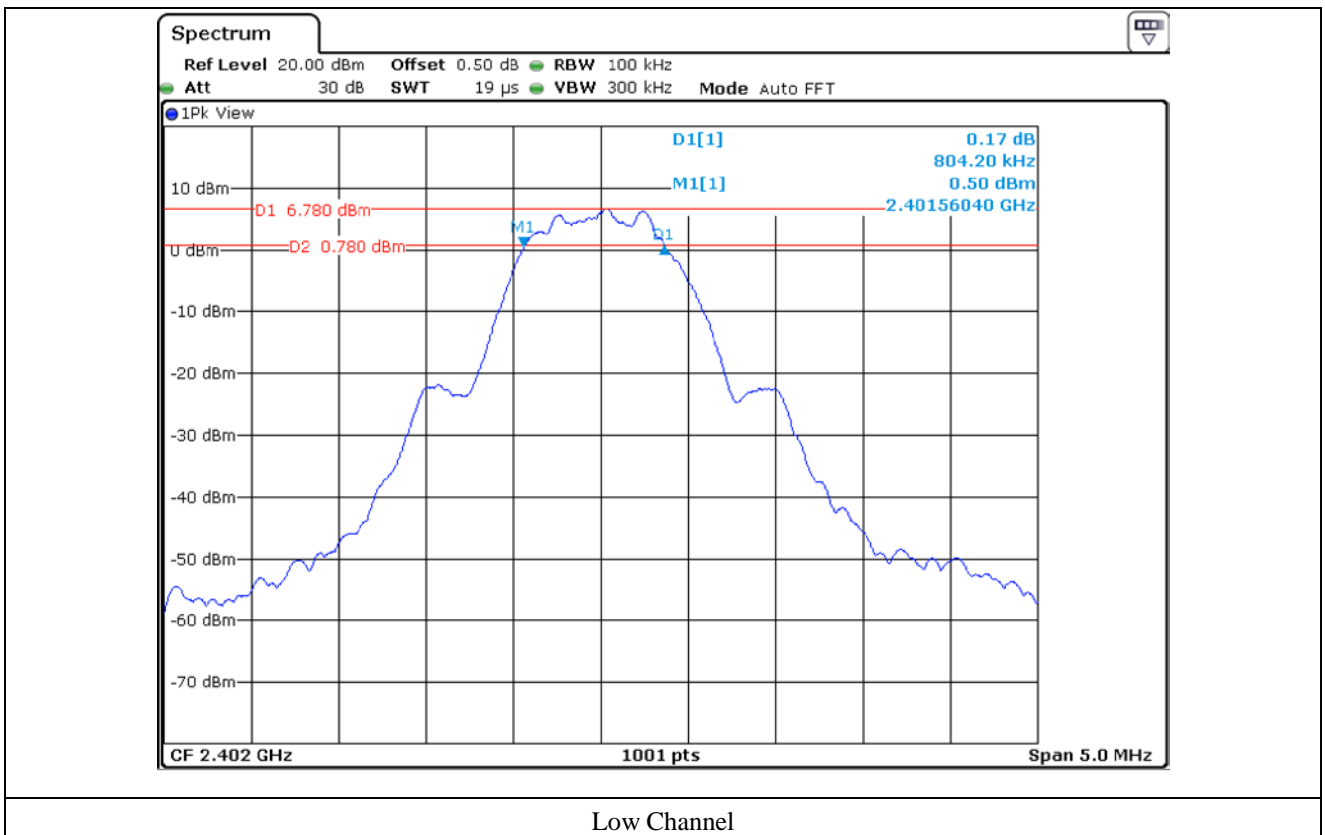

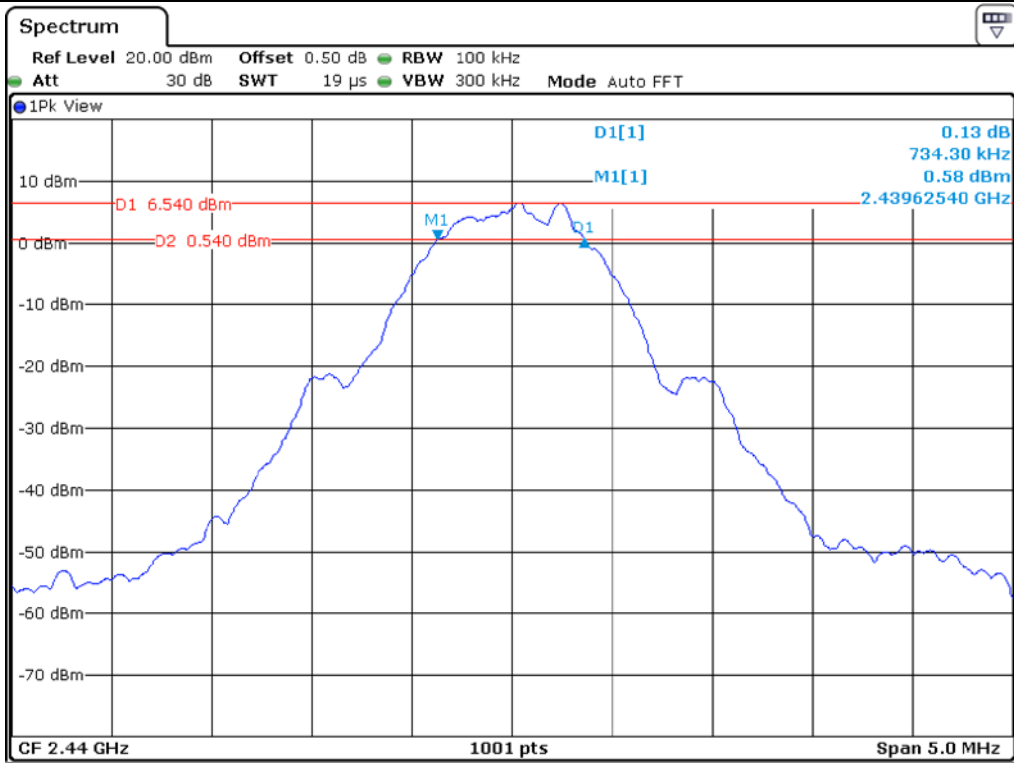

Middle Channel

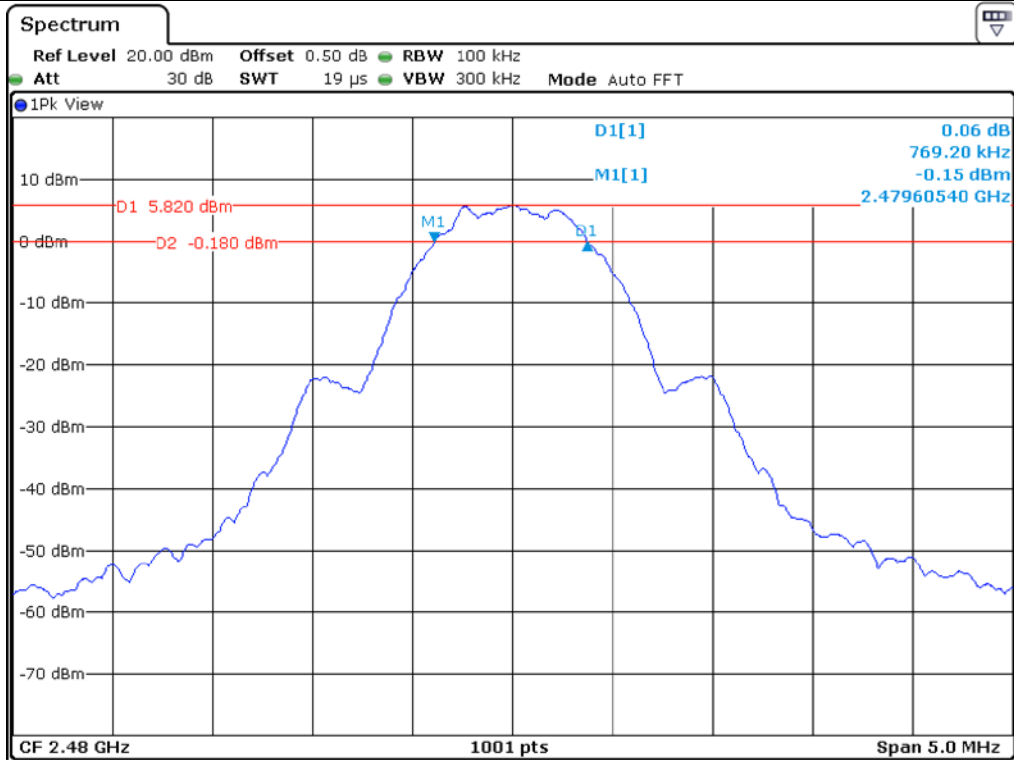

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

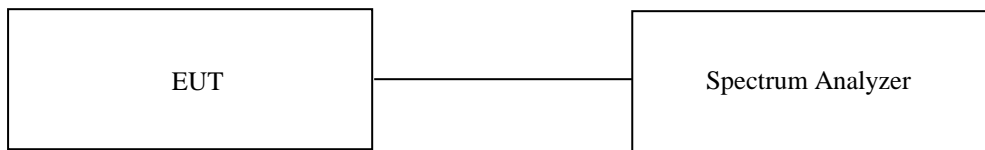

8.3 Test Date


November 24, 2020 ~ November 30, 2020


8.4 Test data for Packet Length: 37 Byte

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	6.38	30.00	23.62
MIDDLE	2 440.00	6.00	30.00	24.00
HIGH	2 480.00	6.37	30.00	23.63

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

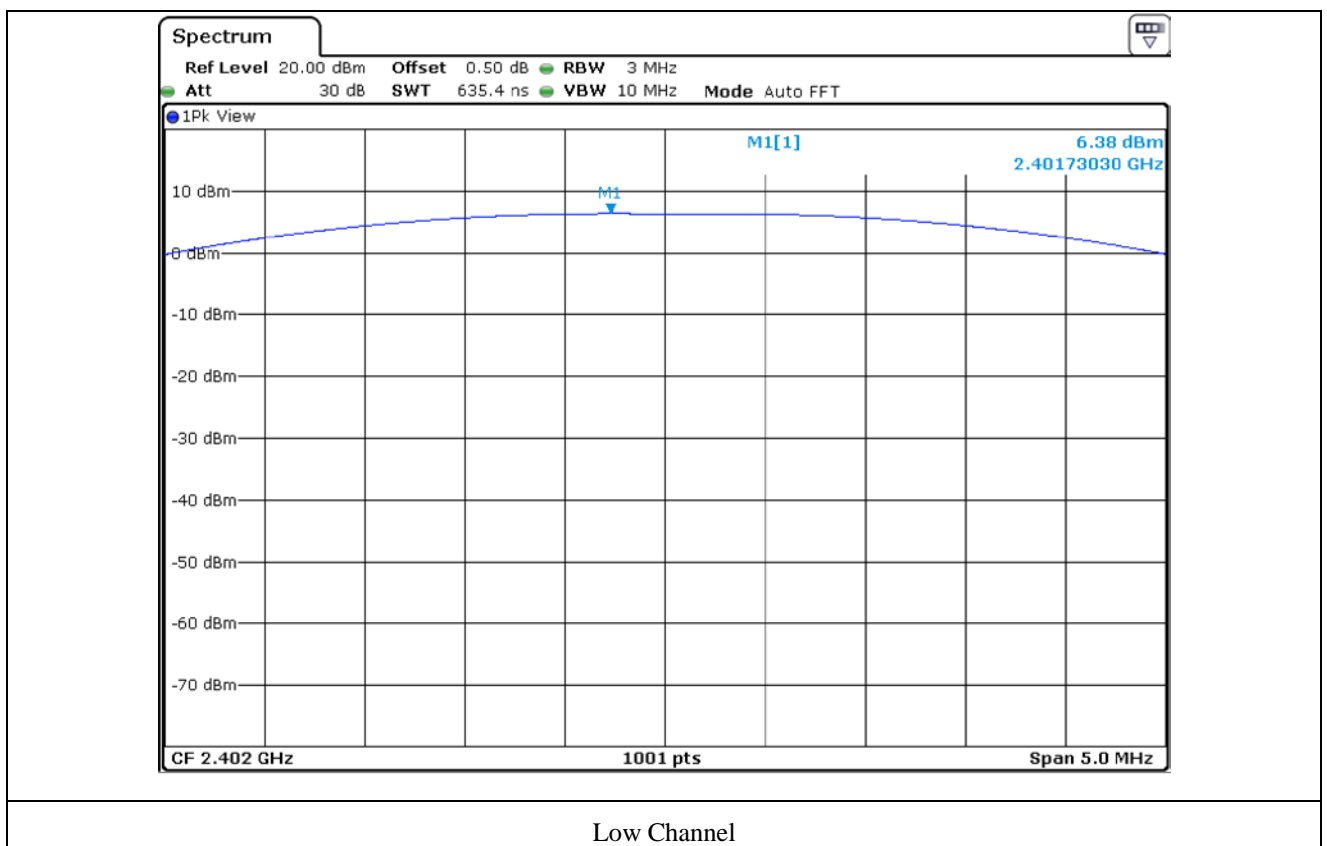

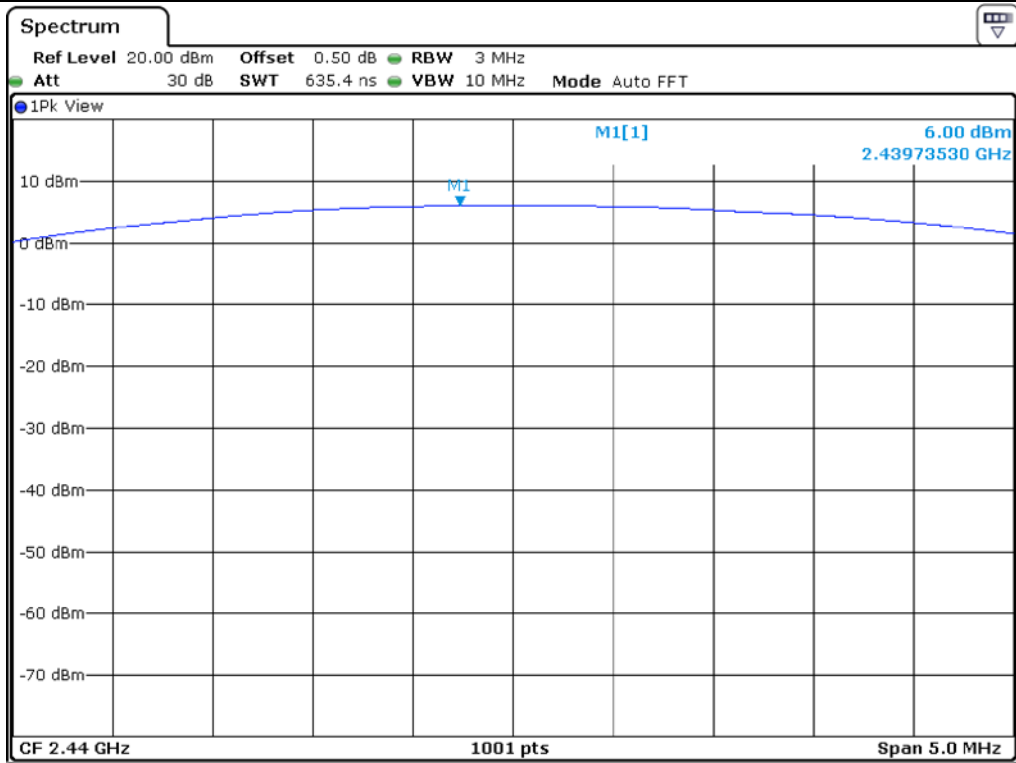

Middle Channel

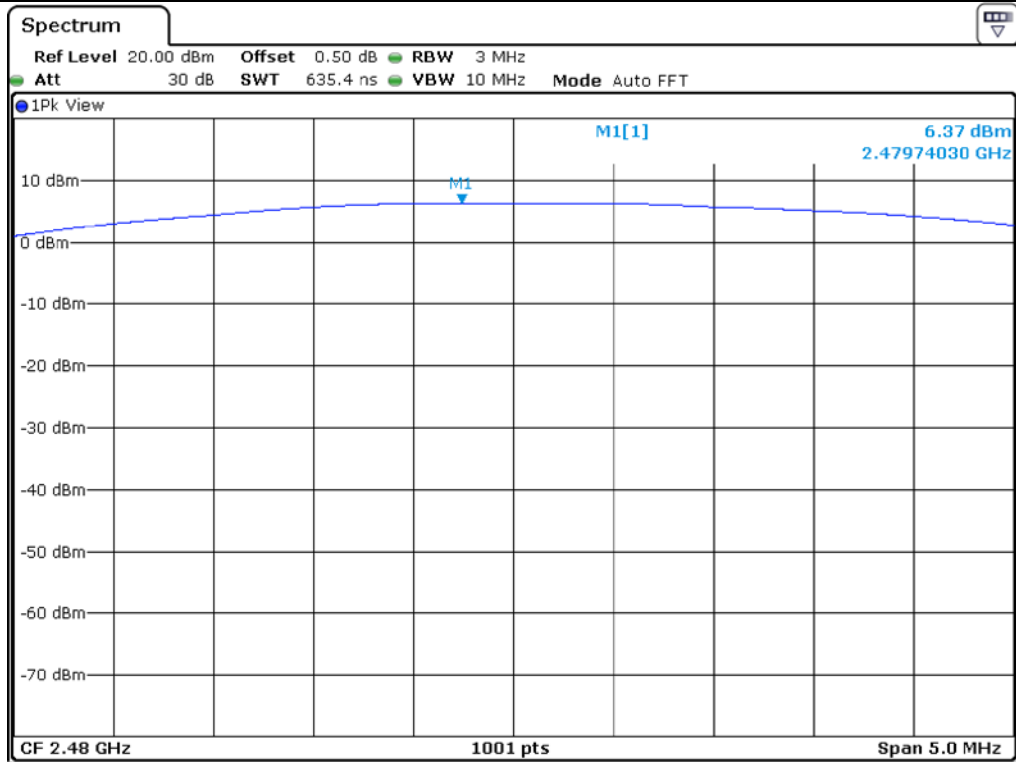


High Channel


8.5 Test data for Packet Length: 255 Byte

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	7.30	30.00	22.70
MIDDLE	2 440.00	6.97	30.00	23.03
HIGH	2 480.00	7.32	30.00	22.68

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

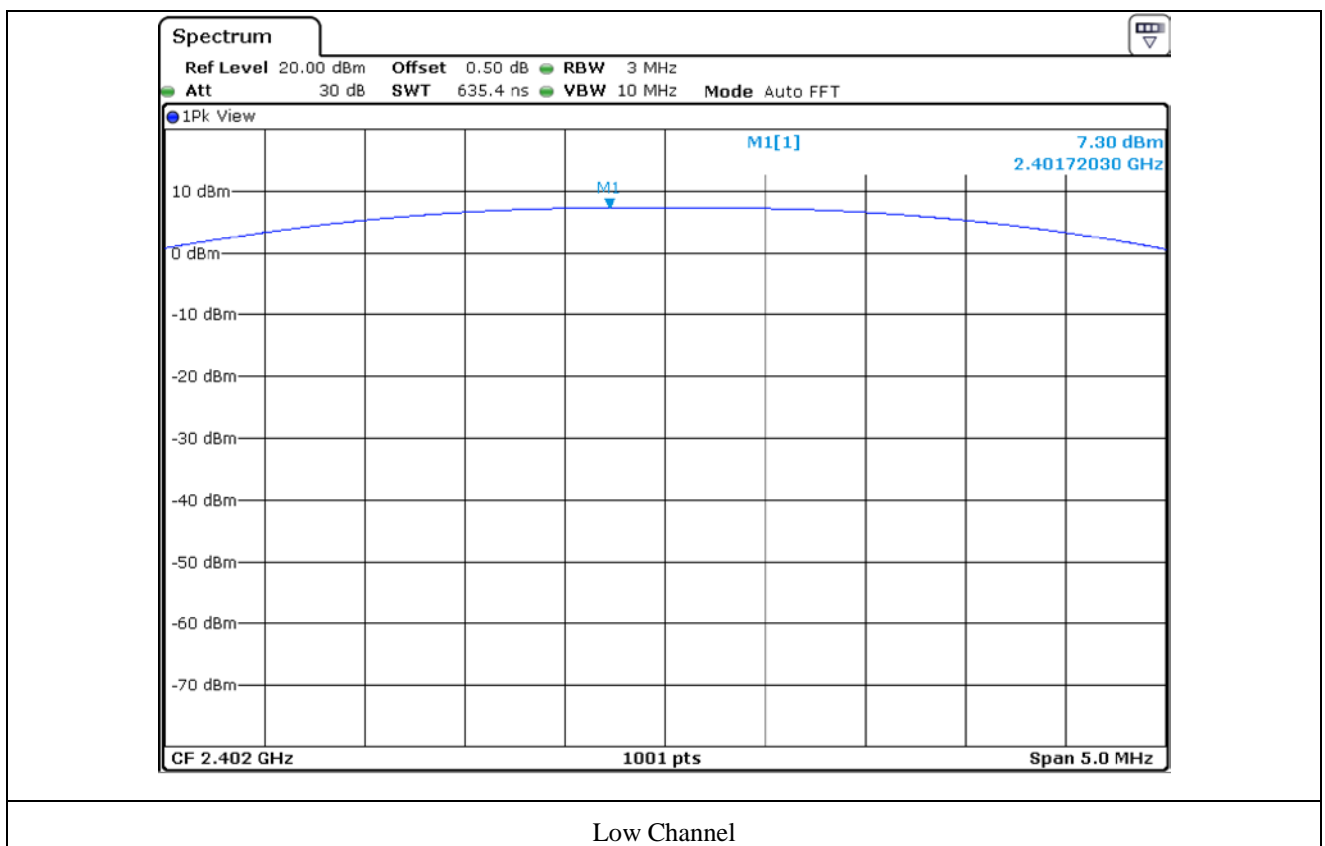

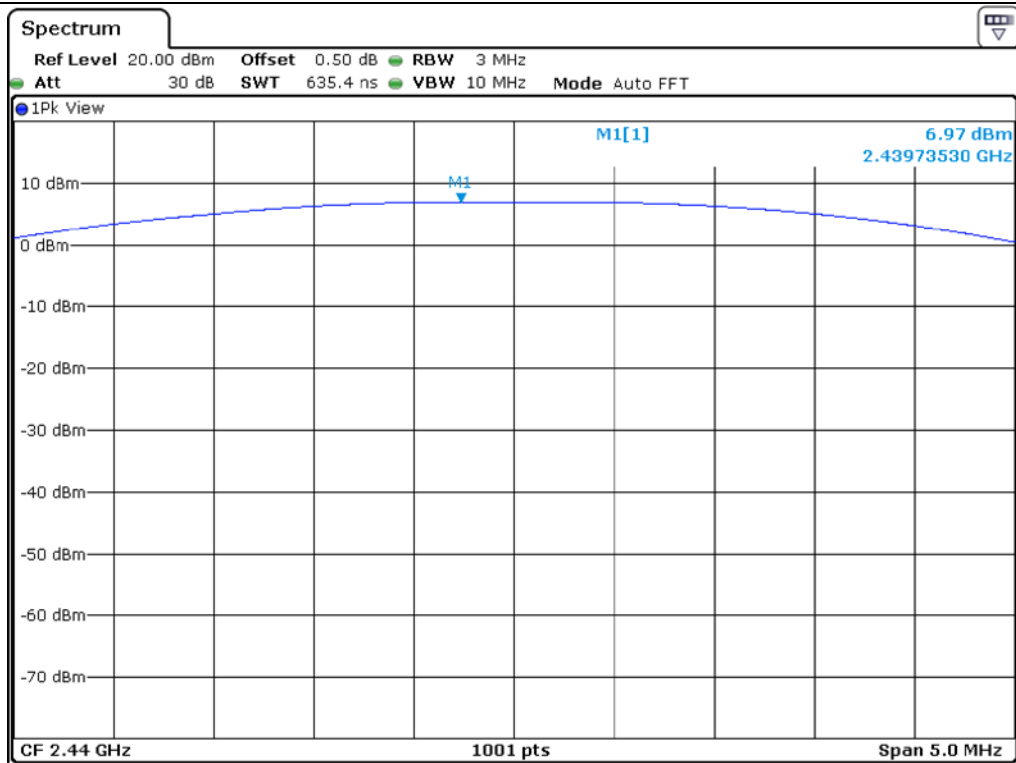

Middle Channel

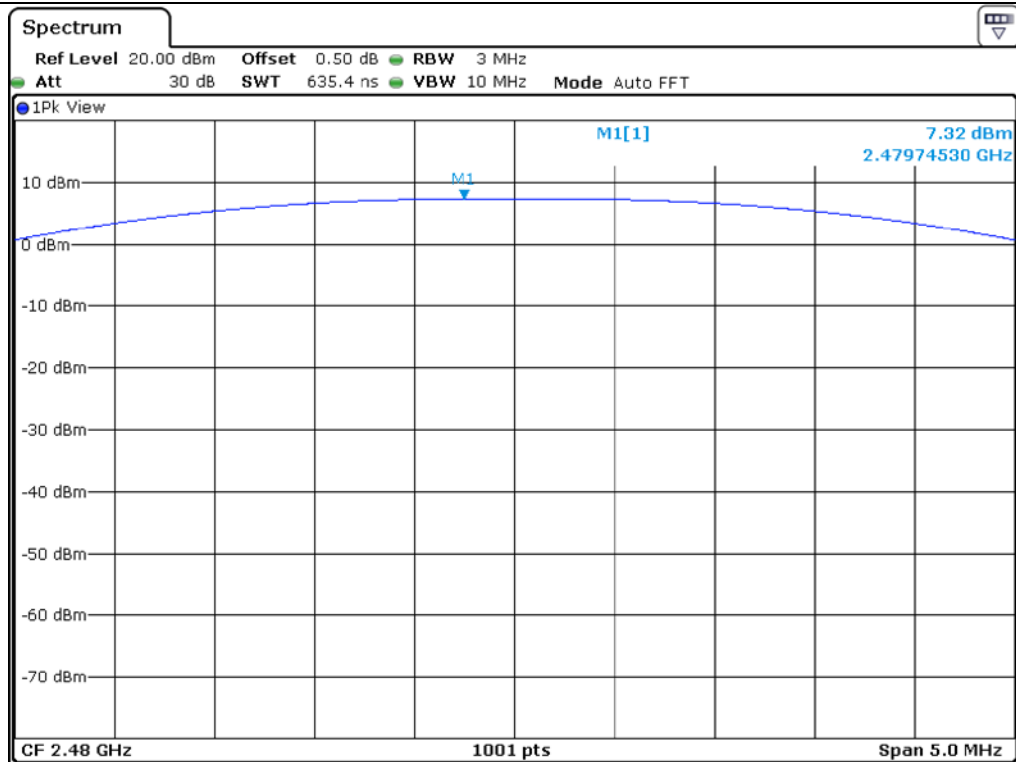

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

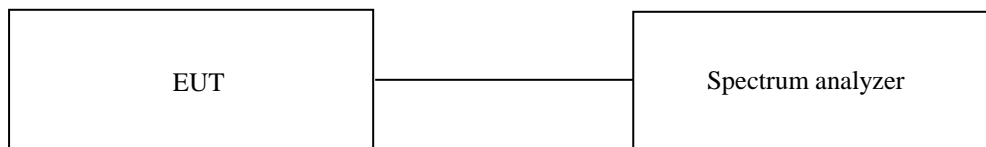

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 10 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date


November 24, 2020 ~ November 30, 2020

9.5 Test data for conducted emission


9.5.1 Test data for Packet Length: 37 Byte

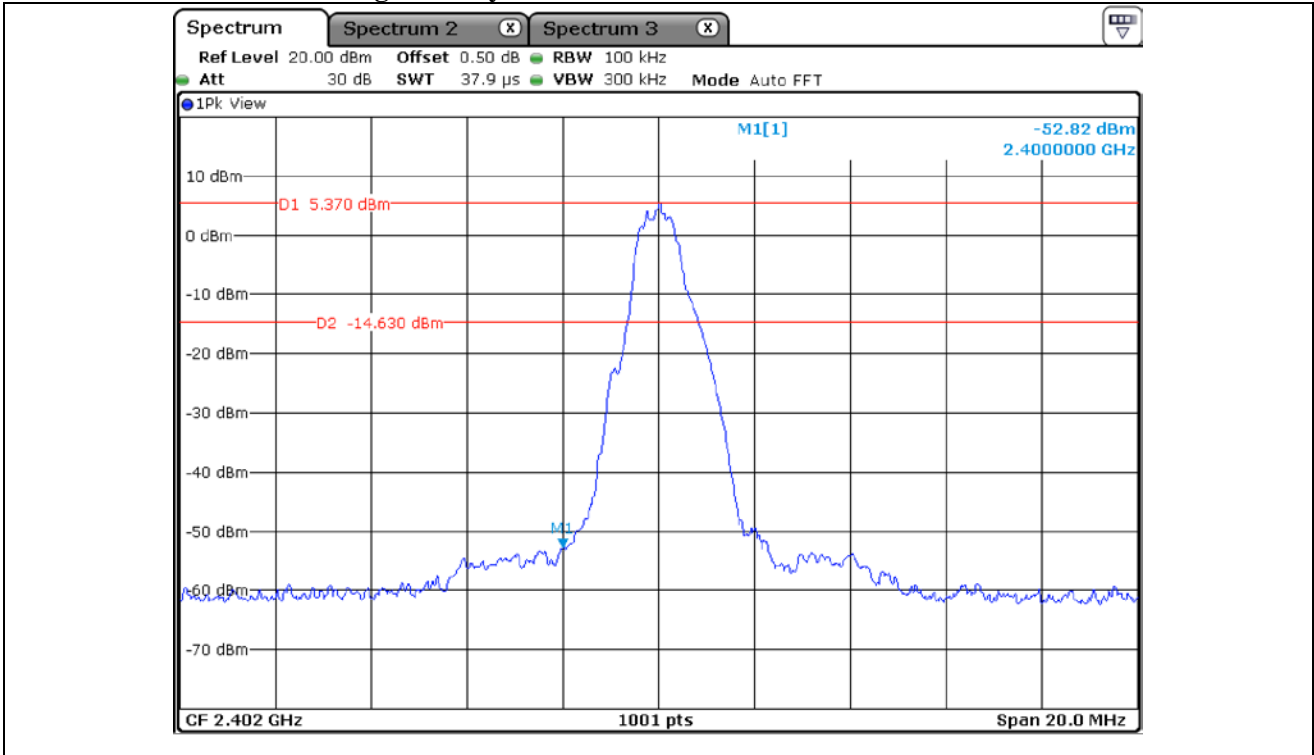


Low Channel

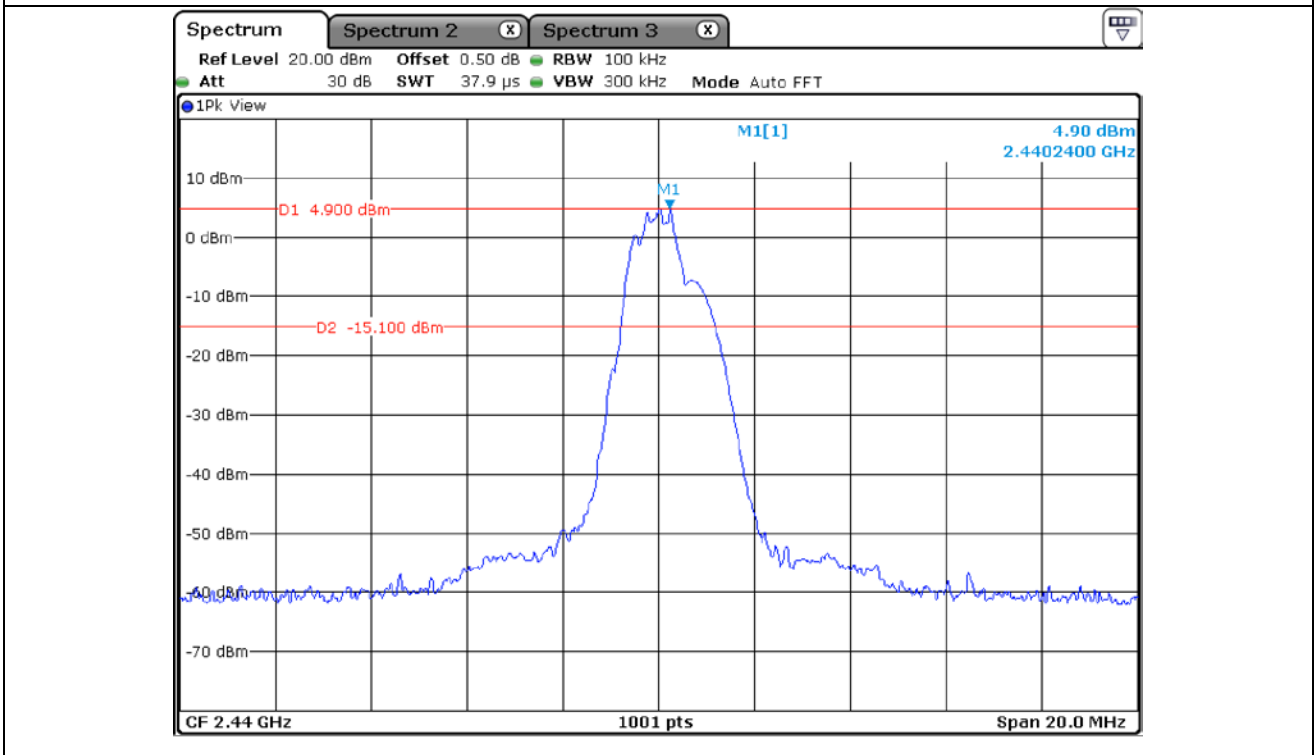


Middle Channel

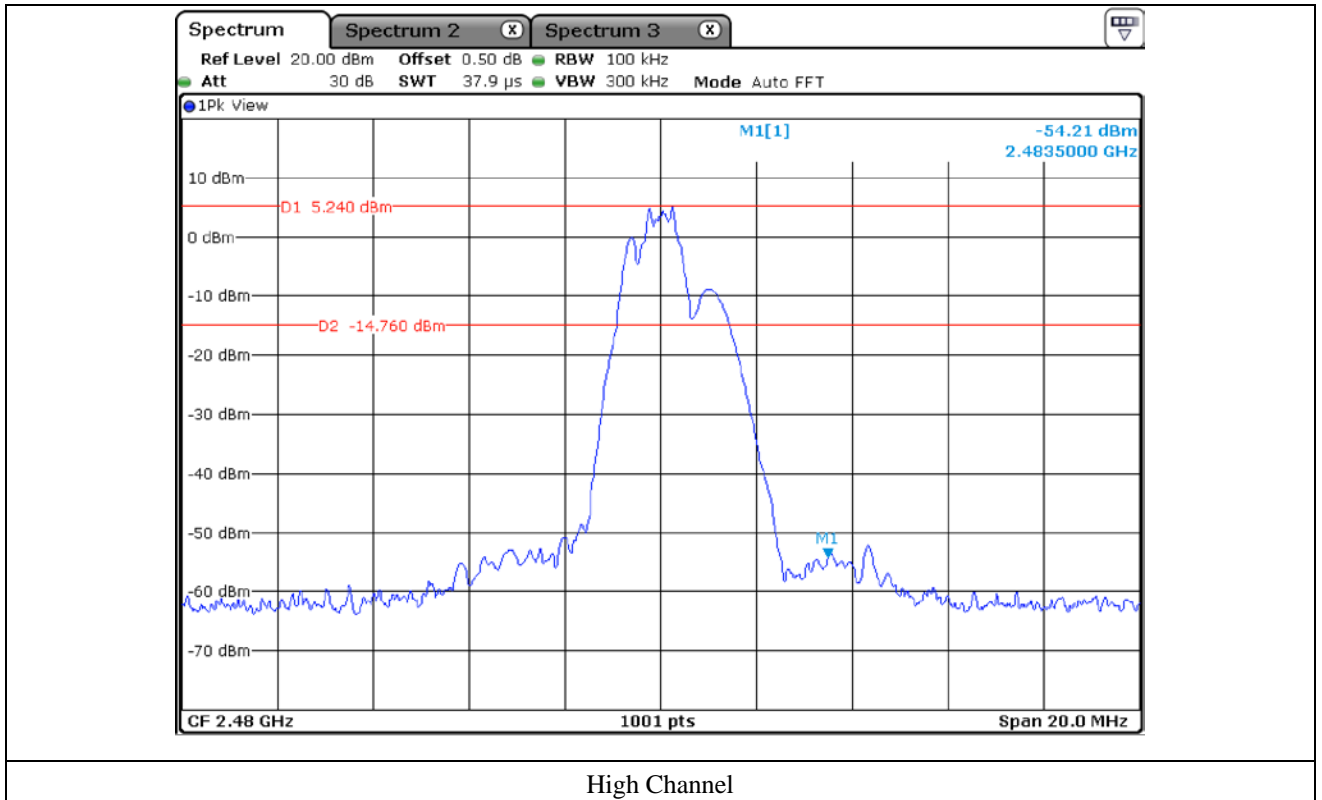


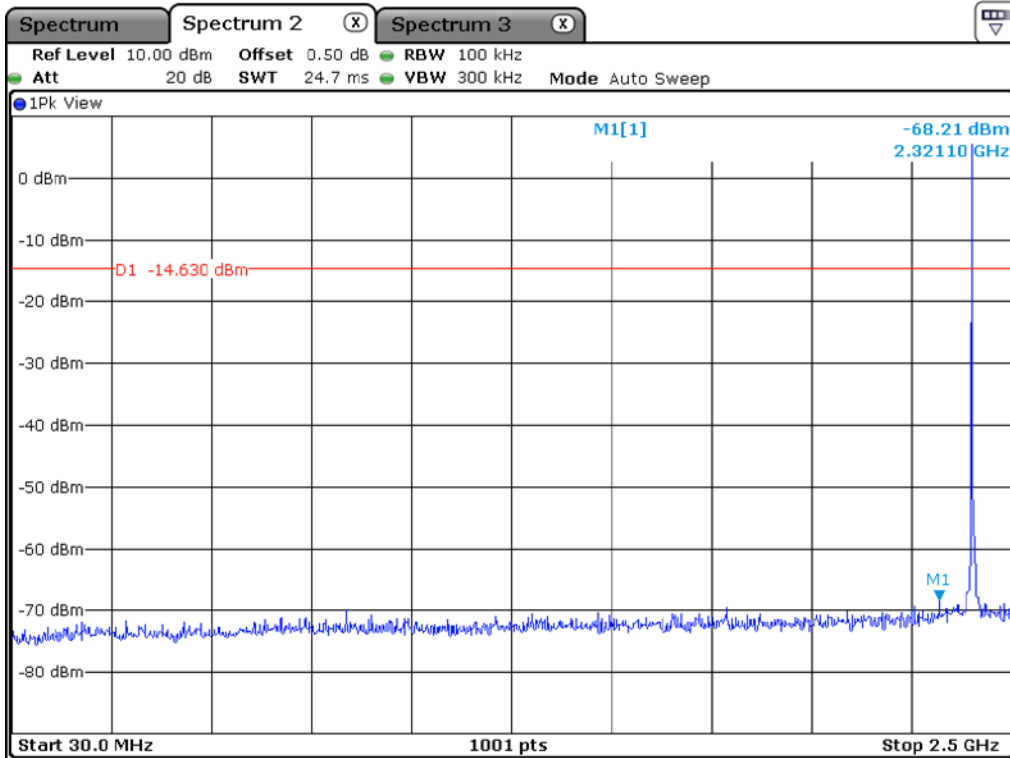


Low Channel

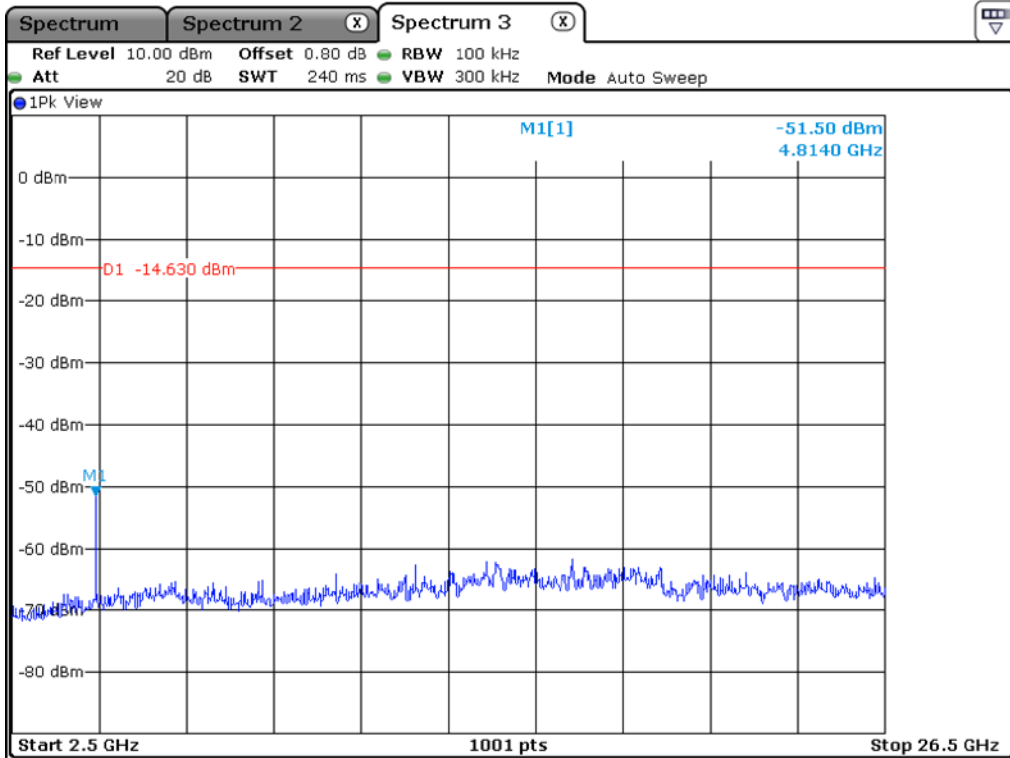


Low Channel

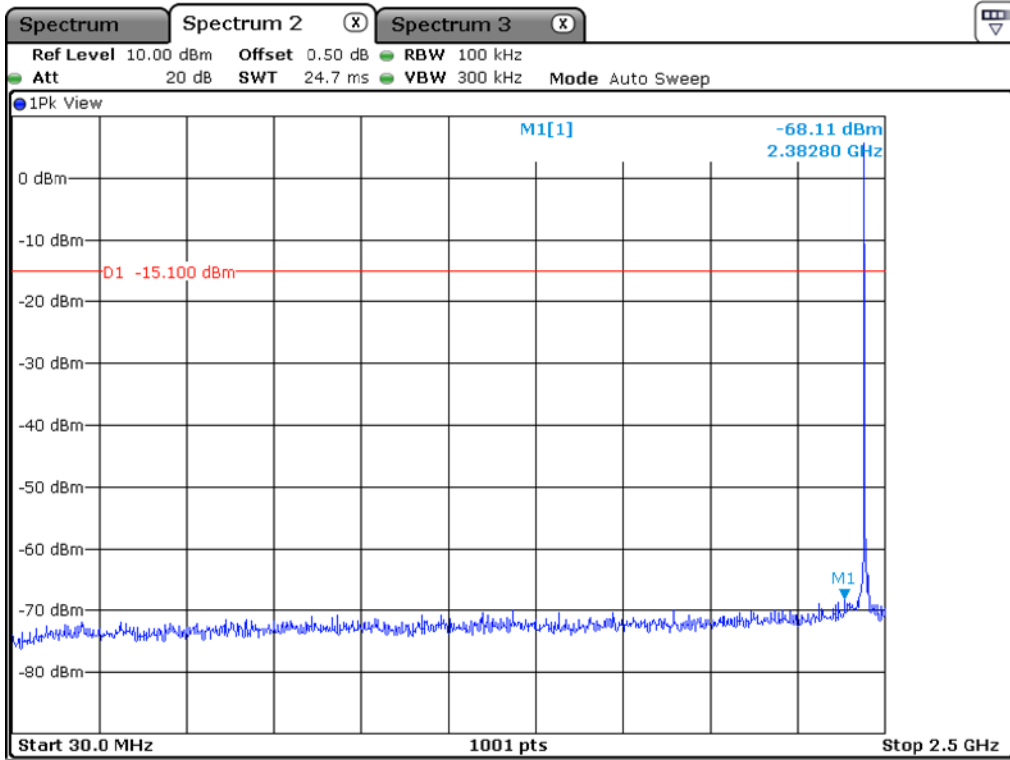


Middle Channel

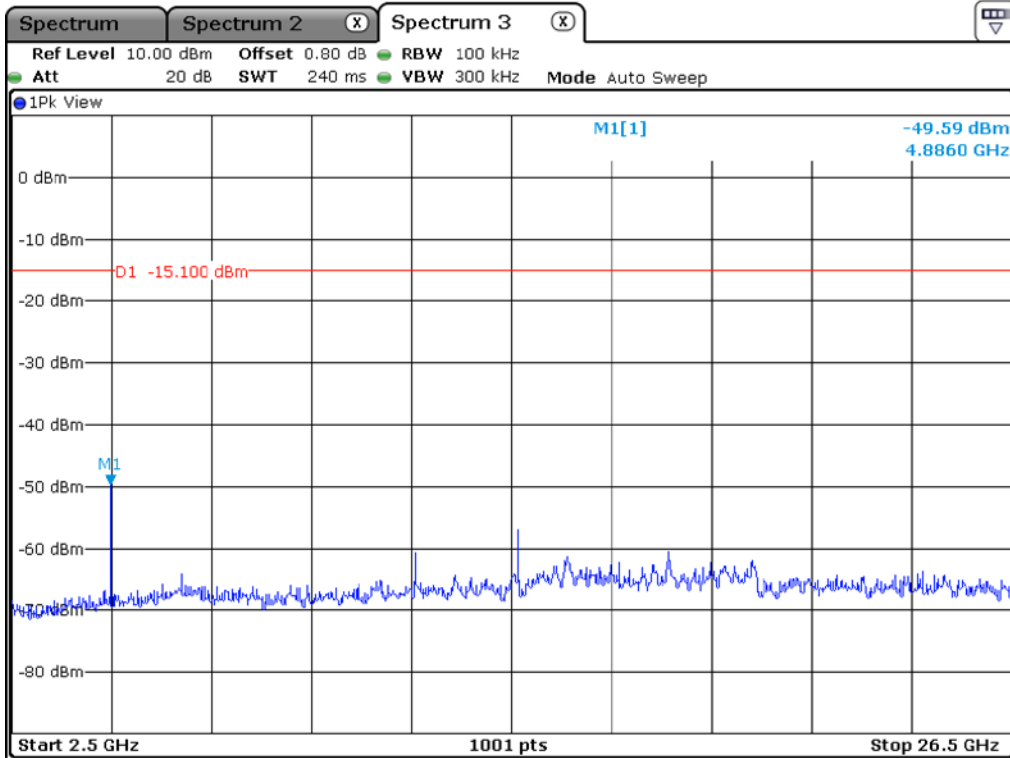

Middle Channel

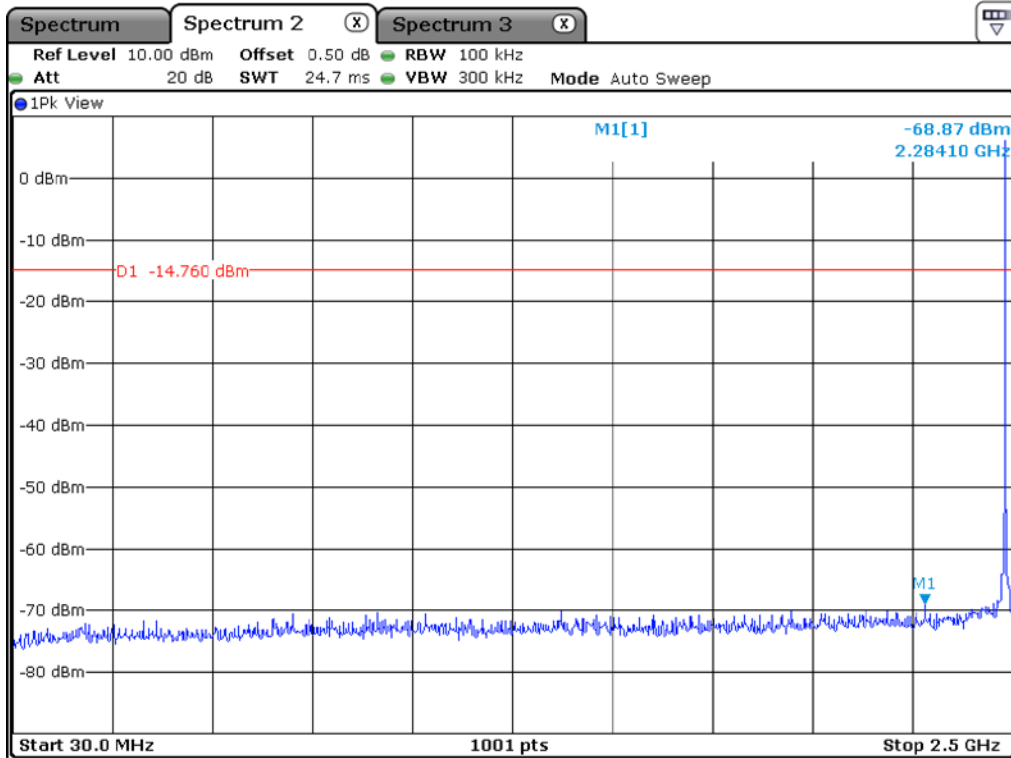


High Channel

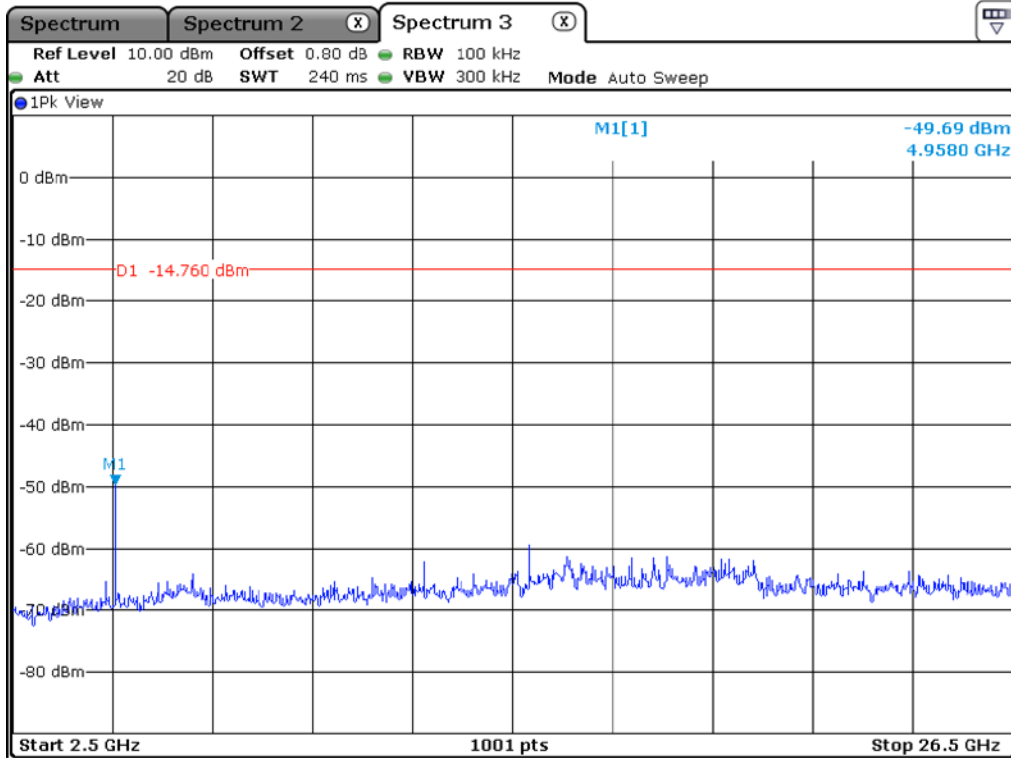


High Channel


9.5.2 Test data for Packet Length: 255 Byte

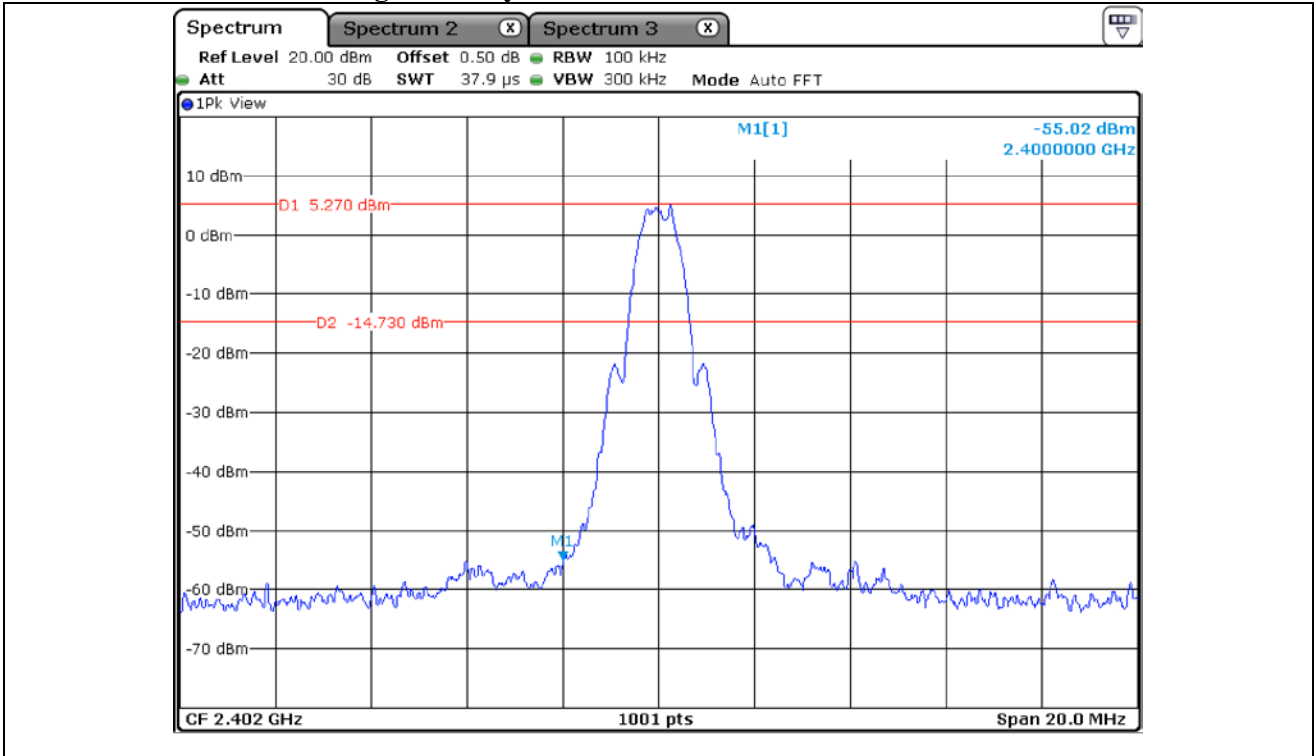


Low Channel

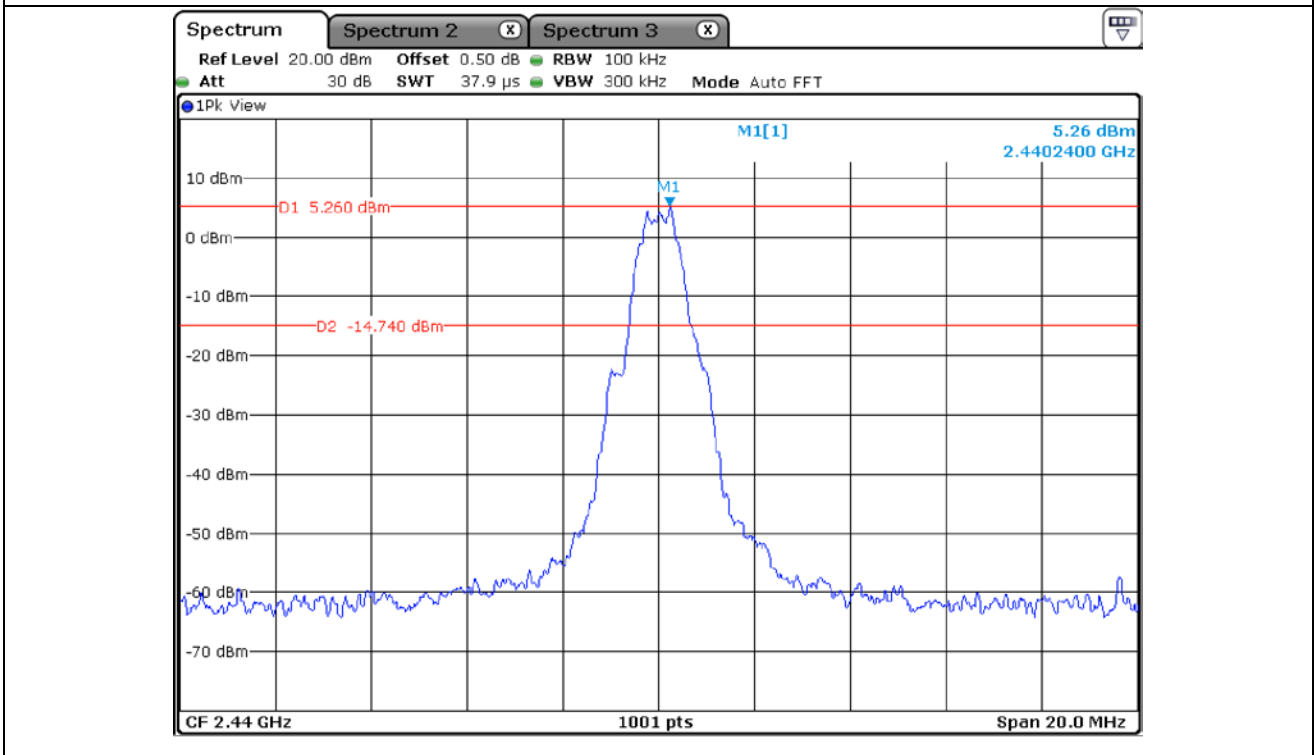


Middle Channel

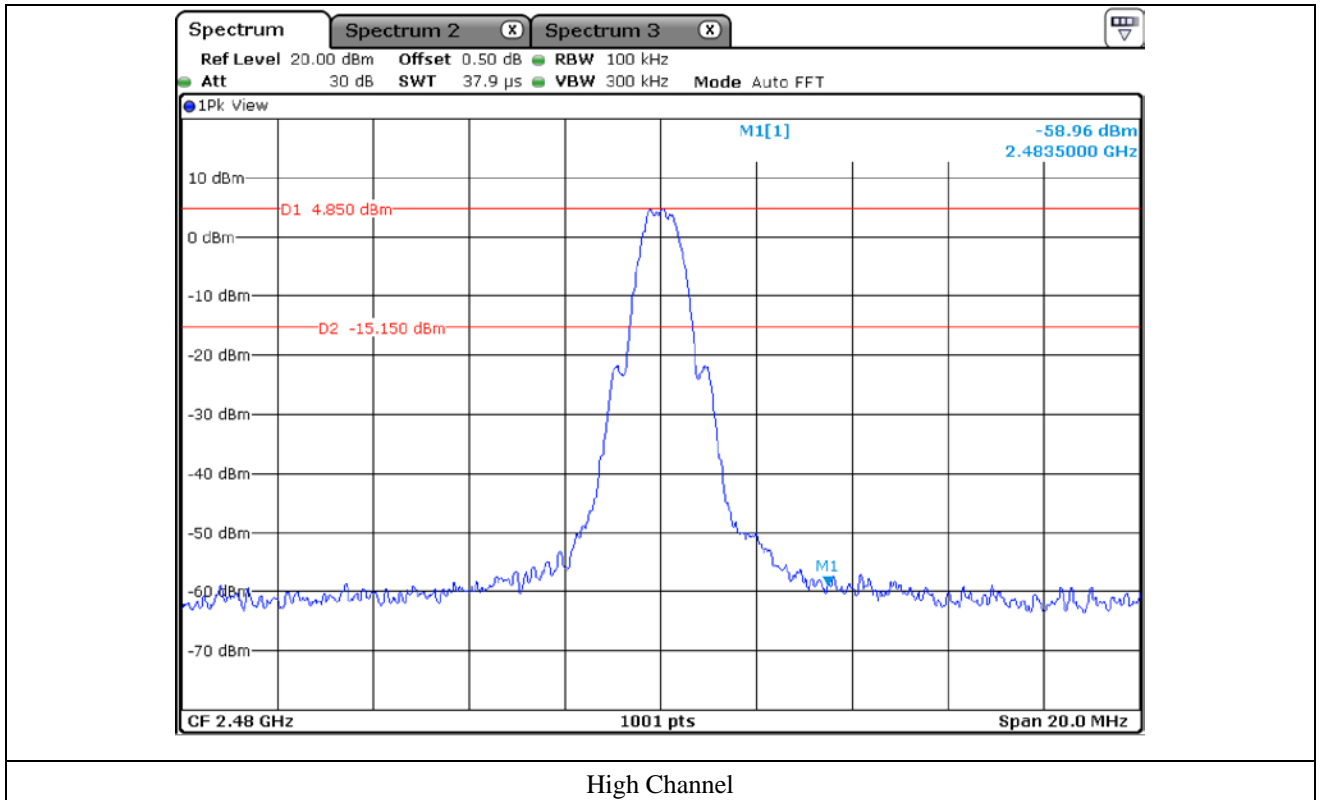


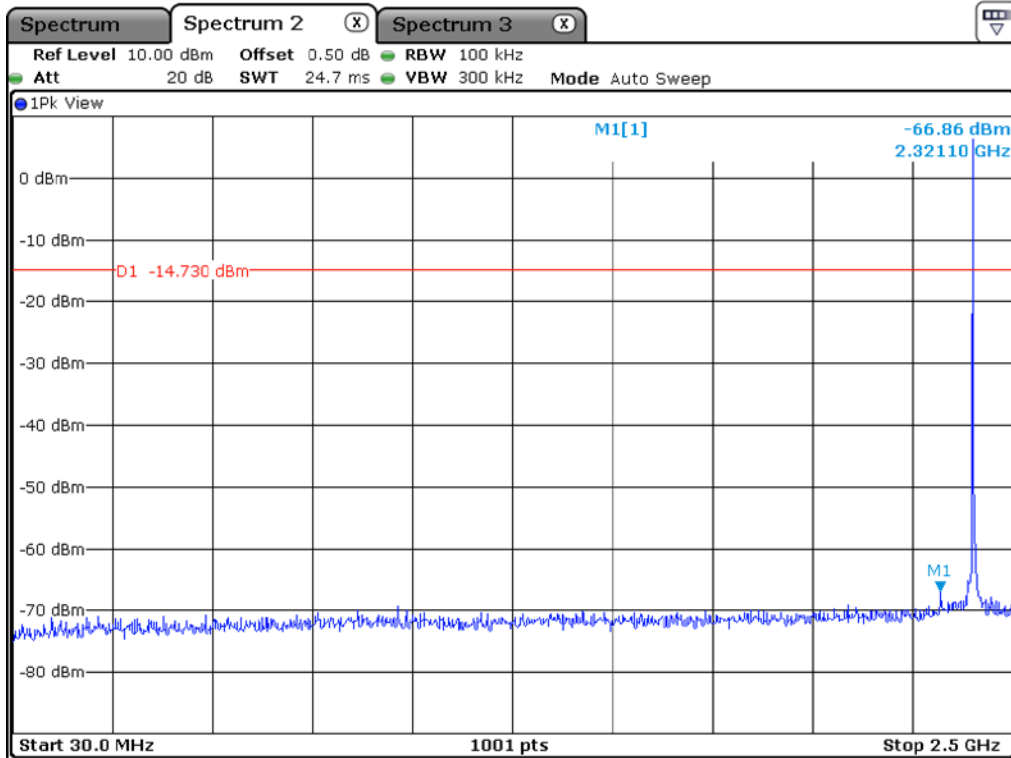


Low Channel

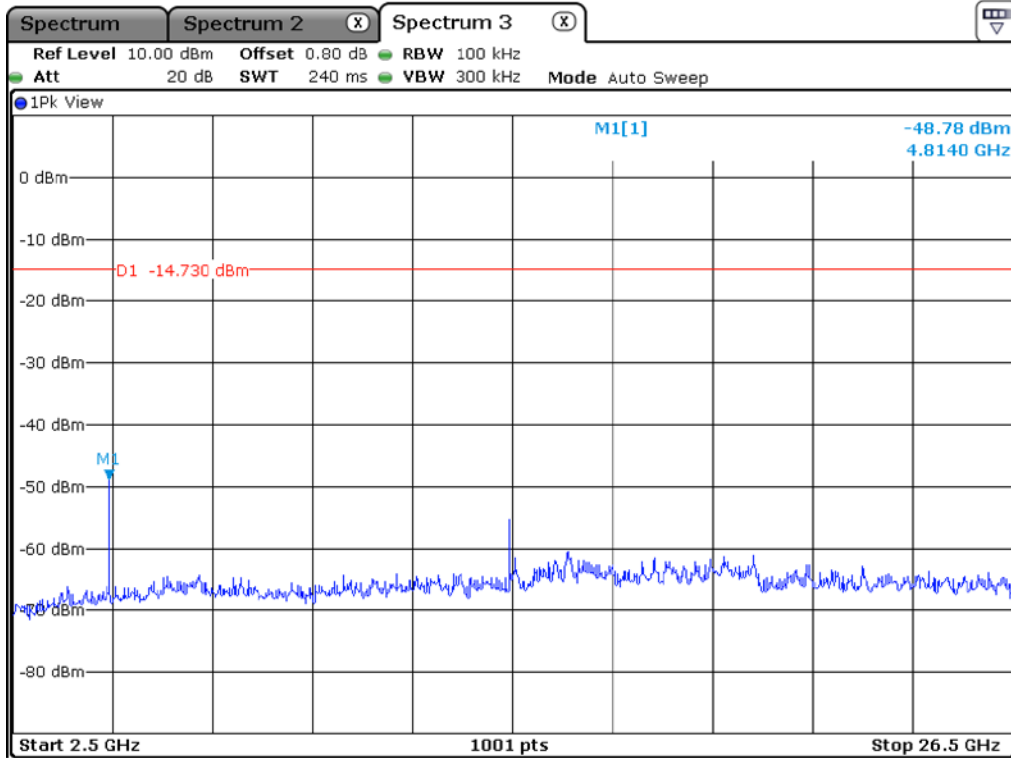


Low Channel

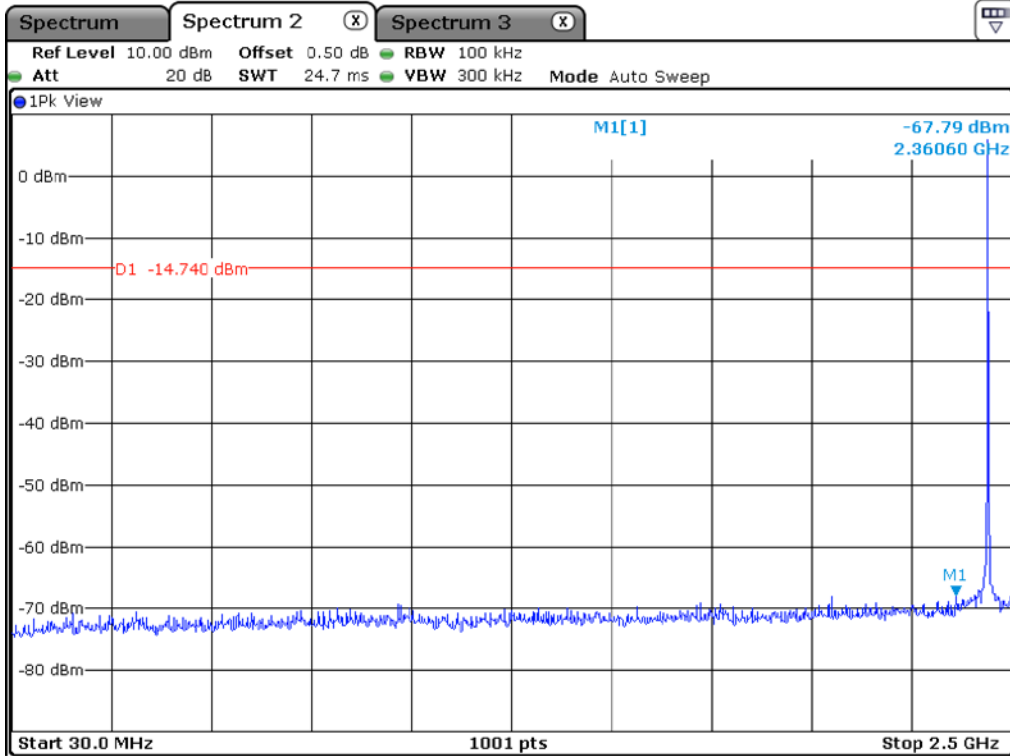


Middle Channel

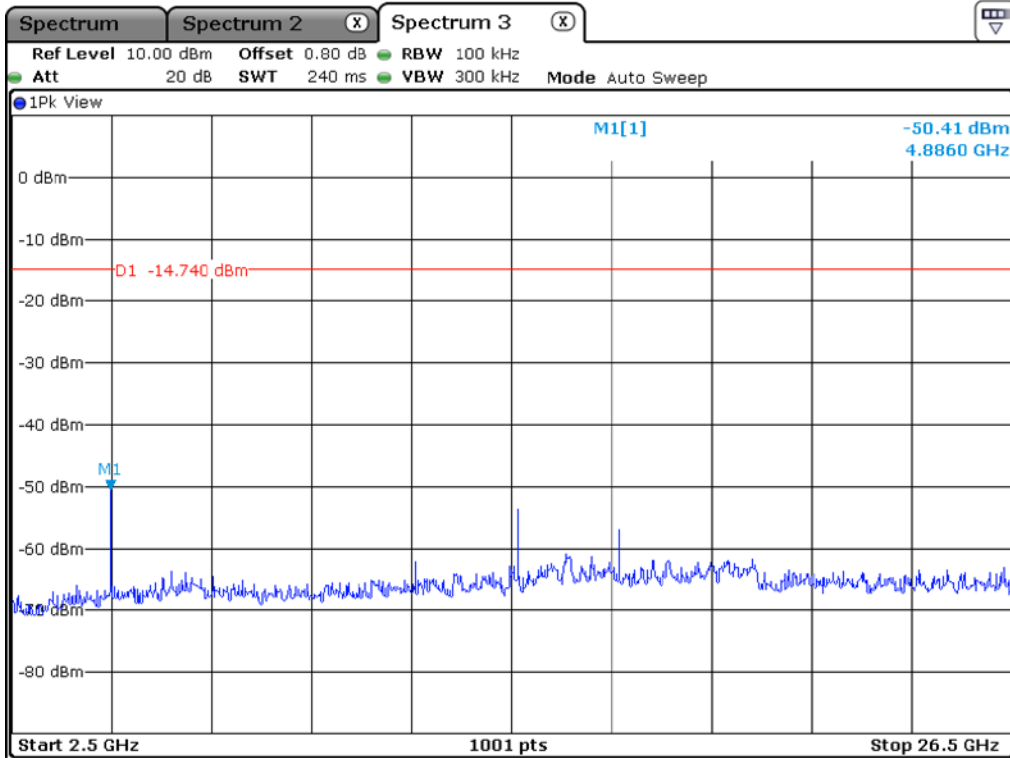

Middle Channel

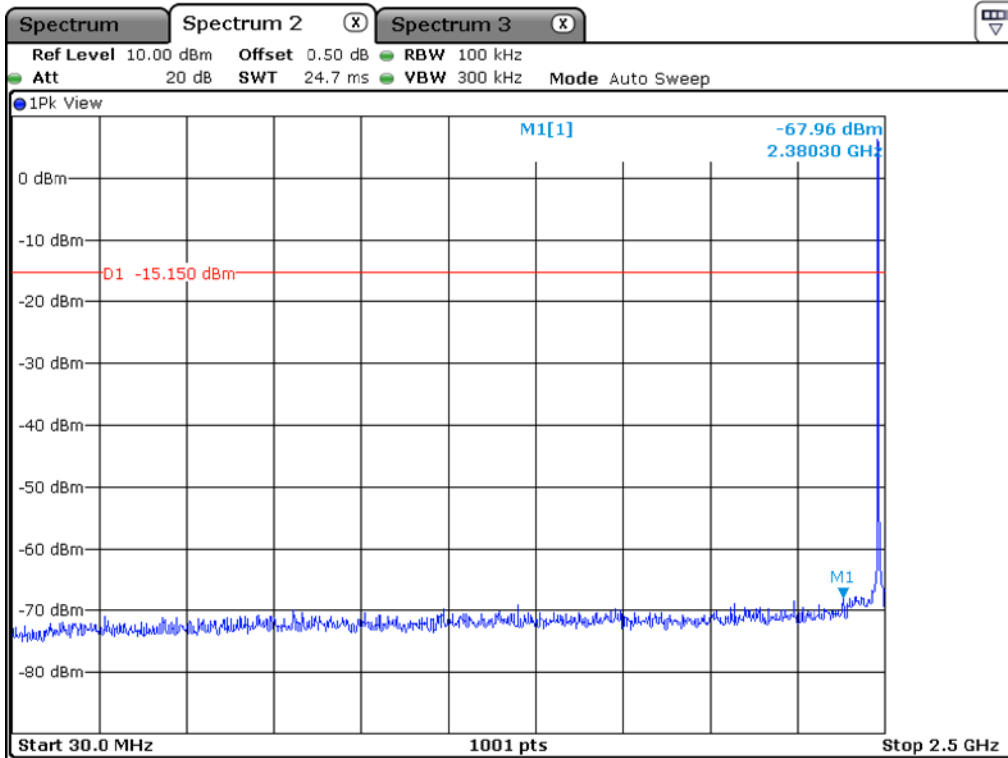

High Channel

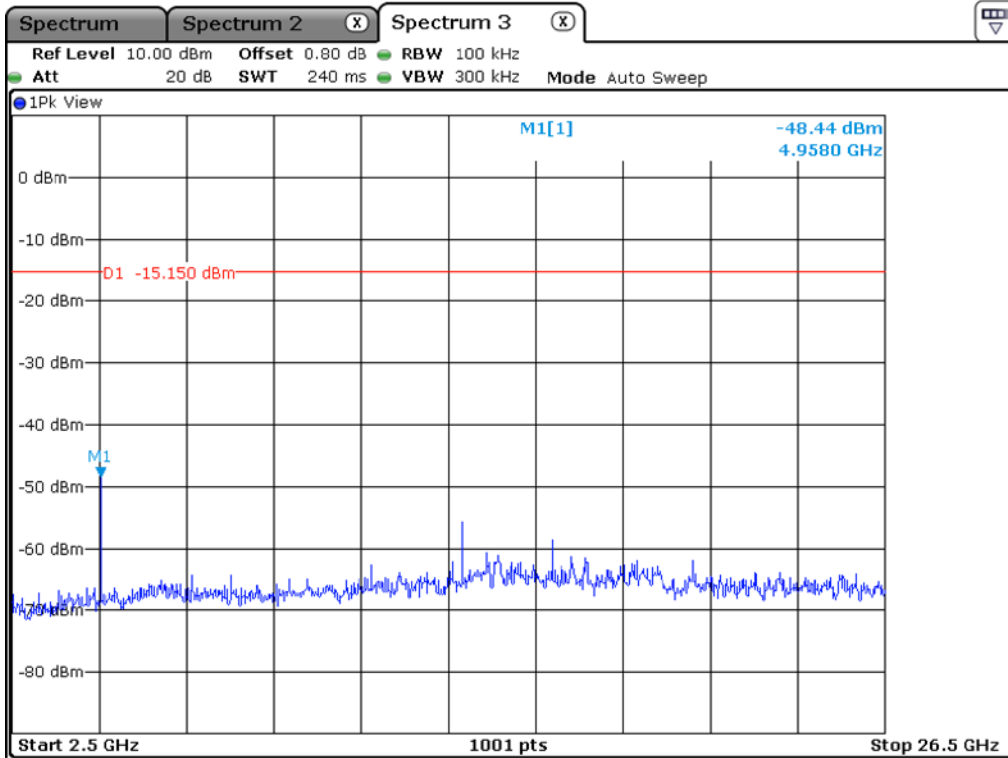

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for Packet Length: 37 Byte

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 64.65 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 356.953	19.18	Peak	H	26.90	3.07	-	49.15	74.00	24.85
2 348.242	7.39	Average	H			1.89	39.25	54.00	14.75
2 334.256	18.62	Peak	V			-	48.59	74.00	25.41
2 337.852	7.18	Average	V			1.89	39.04	54.00	14.96
Test Data for High Channel									
2 483.508	20.95	Peak	H	26.60	3.16	-	50.71	74.00	23.29
2 483.508	7.26	Average	H			1.89	38.91	54.00	15.09
2 485.206	18.63	Peak	V			-	48.39	74.00	25.61
2 497.206	7.00	Average	V			1.89	38.65	54.00	15.35

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

9.6.1.2 Test data for Packet Length: 255 Byte

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 86.00 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 318.831	18.96	Peak	H	26.90	3.07	-	48.93	74.00	25.07
2 343.287	7.45	Average	H	26.90	3.07	0.66	38.08	54.00	15.92
2 320.110	19.13	Peak	V	26.90	3.07	-	49.10	74.00	24.90
2 339.690	7.35	Average	V	26.90	3.07	0.66	37.98	54.00	16.02
Test Data for High Channel									
2 483.805	20.09	Peak	H	26.60	3.16	-	49.85	74.00	24.15
2 483.508	7.20	Average	H	26.60	3.16	0.66	37.62	54.00	16.38
2 496.118	18.60	Peak	V	26.60	3.16	-	48.36	74.00	25.64
2 498.541	7.03	Average	V	26.60	3.16	0.66	37.45	54.00	16.55

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

9.6.2 Spurious & Harmonic Radiated Emission

9.6.1.1 Test data for Packet Length: 37 Byte

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 64.65 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.000	20.73	Peak	H	28.20	4.85	-	53.78	74.00	20.22
	9.96	Average	H			1.89	44.90	54.00	9.10
	21.14	Peak	V			-	54.19	74.00	19.81
	8.99	Average	V			1.89	43.93	54.00	10.07
Test Data for Middle Channel									
4 880.000	21.13	Peak	H	28.30	4.91	-	54.34	74.00	19.66
	9.52	Average	H			1.89	44.62	54.00	9.38
	21.04	Peak	V			-	54.25	74.00	19.75
	10.05	Average	V			1.89	45.15	54.00	8.85
Test Data for High Channel									
4 960.000	21.00	Peak	H	28.60	5.04	-	54.64	74.00	19.36
	10.09	Average	H			1.89	45.62	54.00	8.38
	21.33	Peak	V			-	54.97	74.00	19.03
	10.20	Average	V			1.89	45.73	54.00	8.27

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

9.6.1.2 Test data for Packet Length: 255 Byte

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 86.00 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.000	20.68	Peak	H	28.20	4.85	-	53.73	74.00	20.27
	9.52	Average	H			0.66	43.23	54.00	10.77
	21.18	Peak	V			-	54.23	74.00	19.77
	9.55	Average	V			0.66	43.26	54.00	10.74
Test Data for Middle Channel									
4 880.000	20.97	Peak	H	28.30	4.91	-	54.18	74.00	19.82
	9.44	Average	H	28.30	4.91	0.66	43.31	54.00	10.69
	20.68	Peak	V	28.30	4.91	-	53.89	74.00	20.11
	8.93	Average	V	28.30	4.91	0.66	42.80	54.00	11.20
Test Data for High Channel									
4 960.000	20.09	Peak	H	28.60	5.04	-	53.73	74.00	20.27
	10.13	Average	H	28.60	5.04	0.66	44.43	54.00	9.57
	20.61	Peak	V	28.60	5.04	-	54.25	74.00	19.75
	9.44	Average	V	28.60	5.04	0.66	43.74	54.00	10.26

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

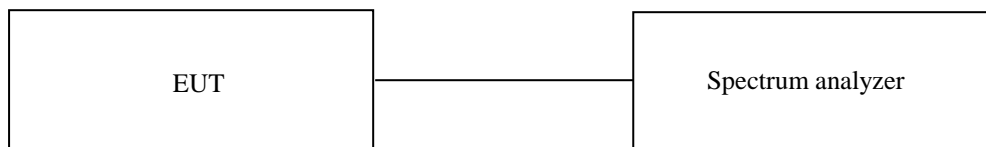

10.3 Test Date

November 24, 2020 ~ November 30, 2020


10.4 Test data for Packet Length: 37 Byte

- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-9.66	8.00	17.66
Middle	2 440.00	-9.40	8.00	17.40
High	2 480.00	-10.20	8.00	18.20


Remark. Margin = Limit – Measured value

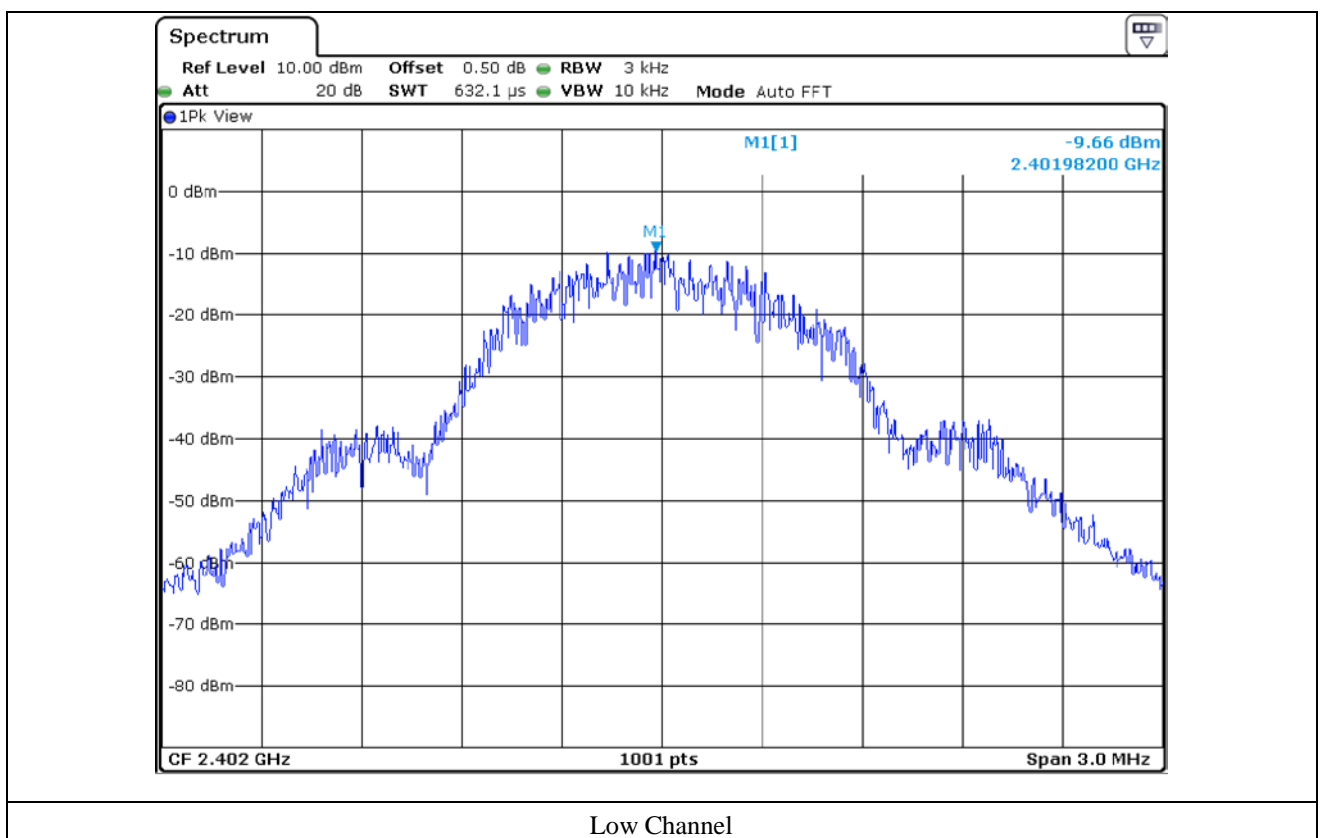

Low Channel

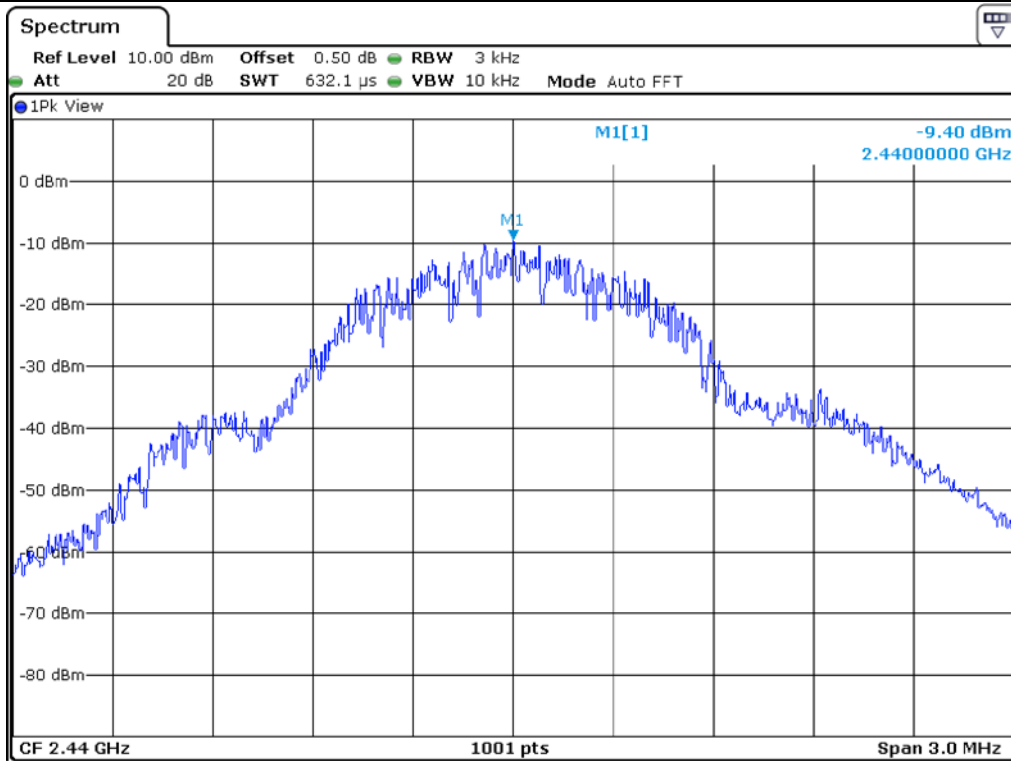

Middle Channel

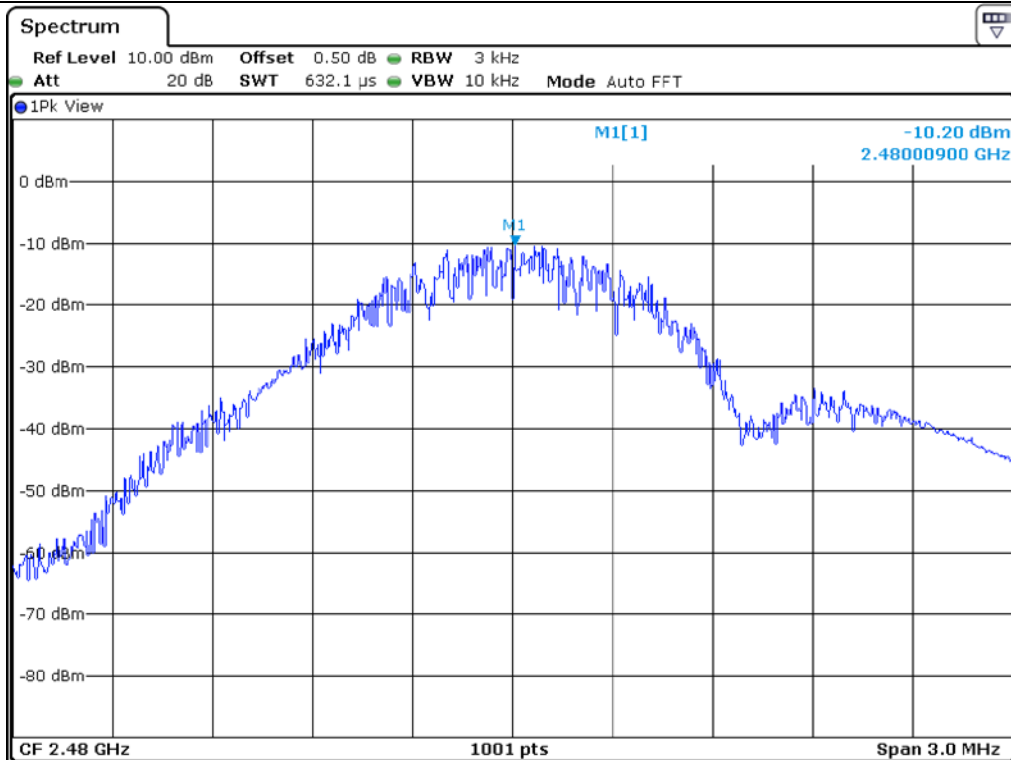

High Channel


10.5 Test data for Packet Length: 255 Byte

- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-9.02	8.00	17.02
Middle	2 440.00	-7.75	8.00	15.75
High	2 480.00	-9.26	8.00	17.26


Remark. Margin = Limit – Measured value

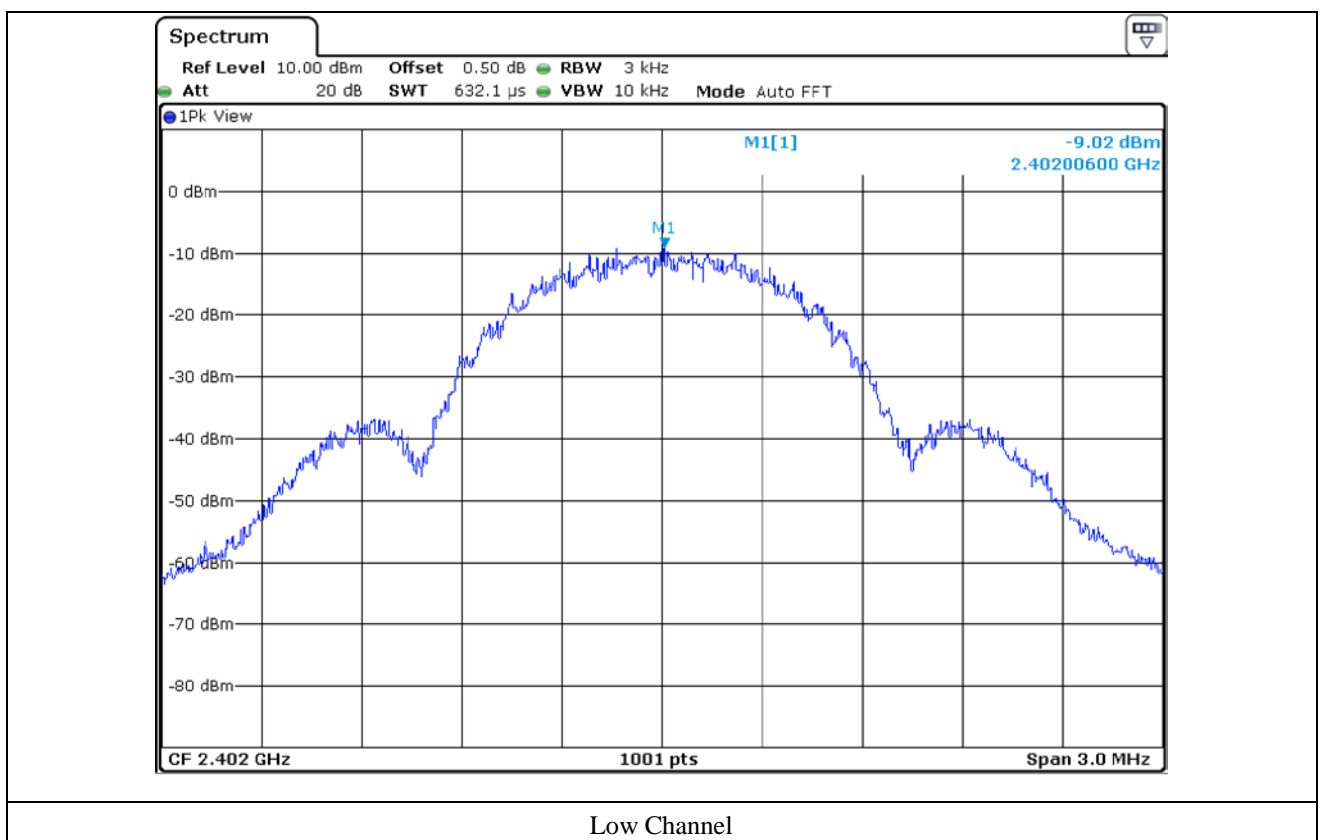

Low Channel

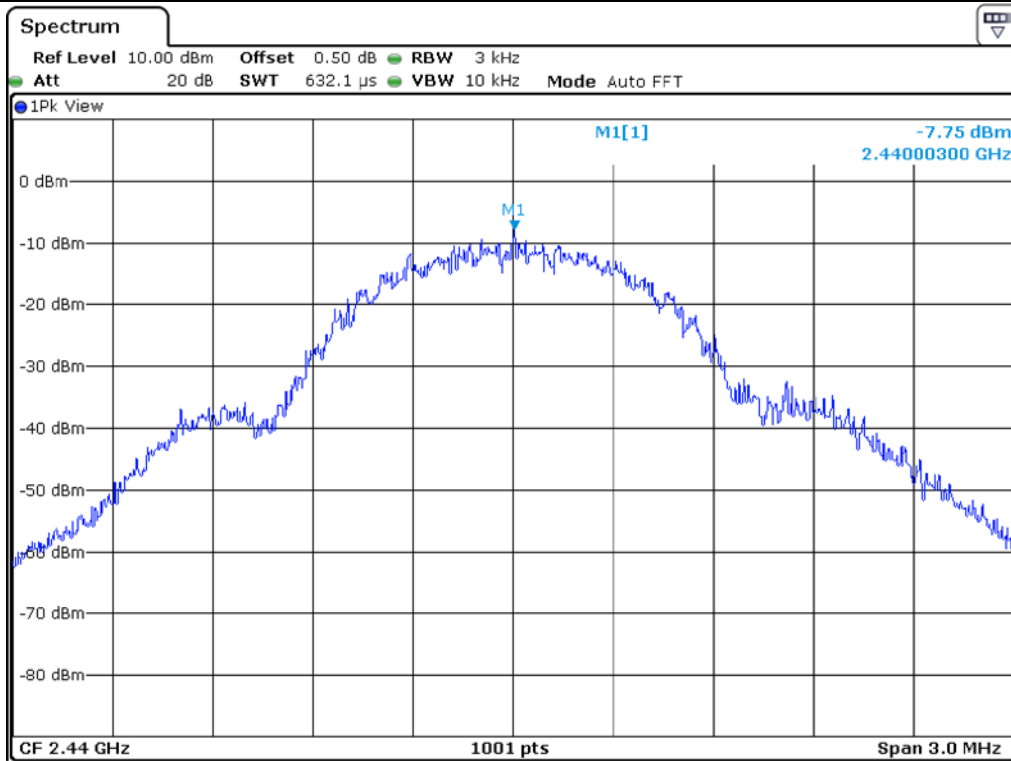

Middle Channel

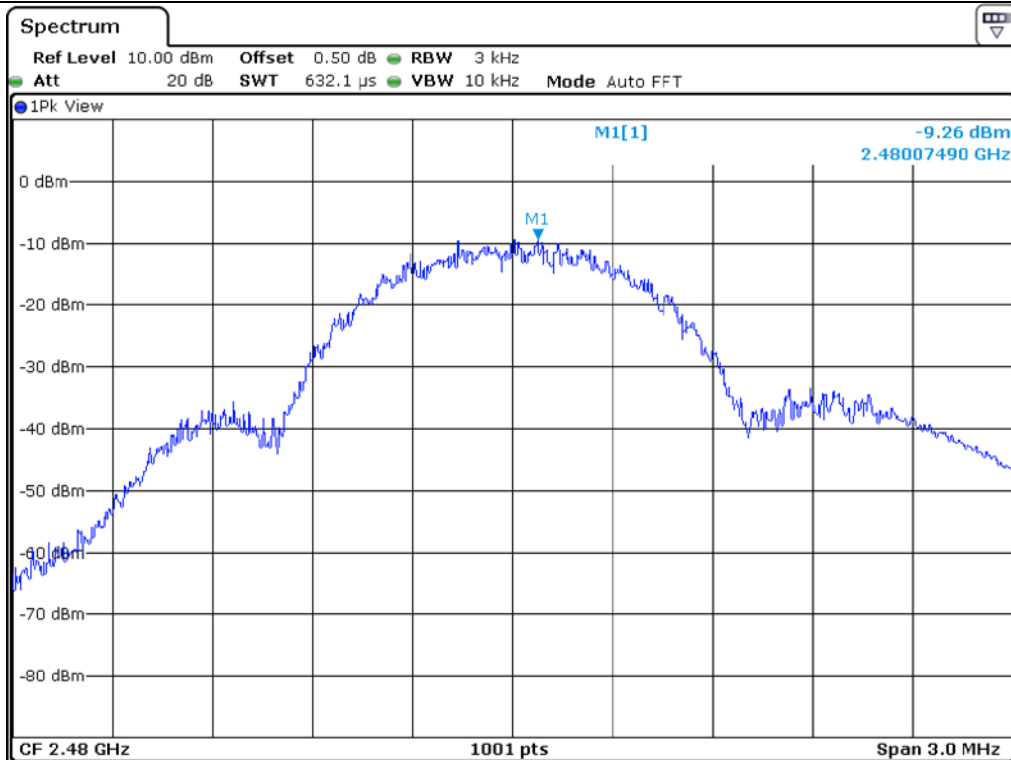

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 10 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

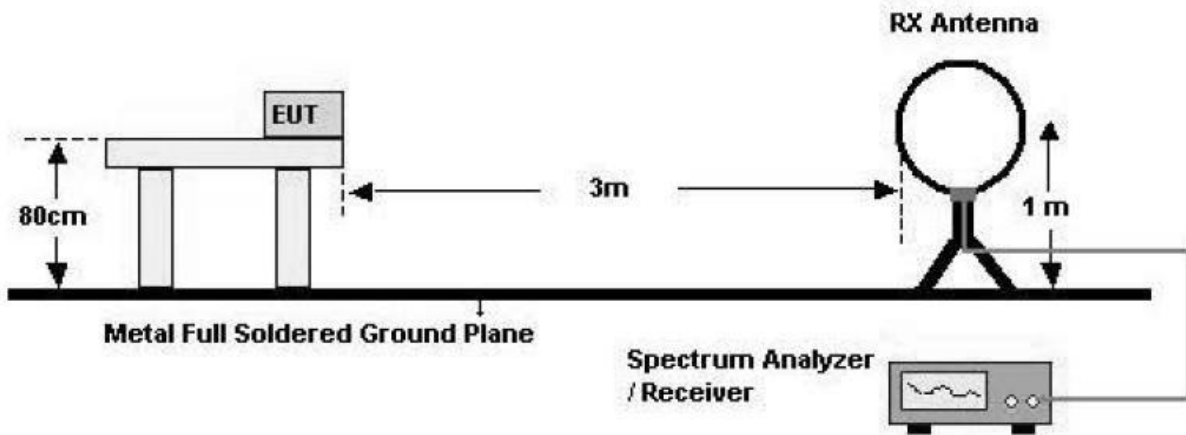

2. 30 MHz - 1 GHz

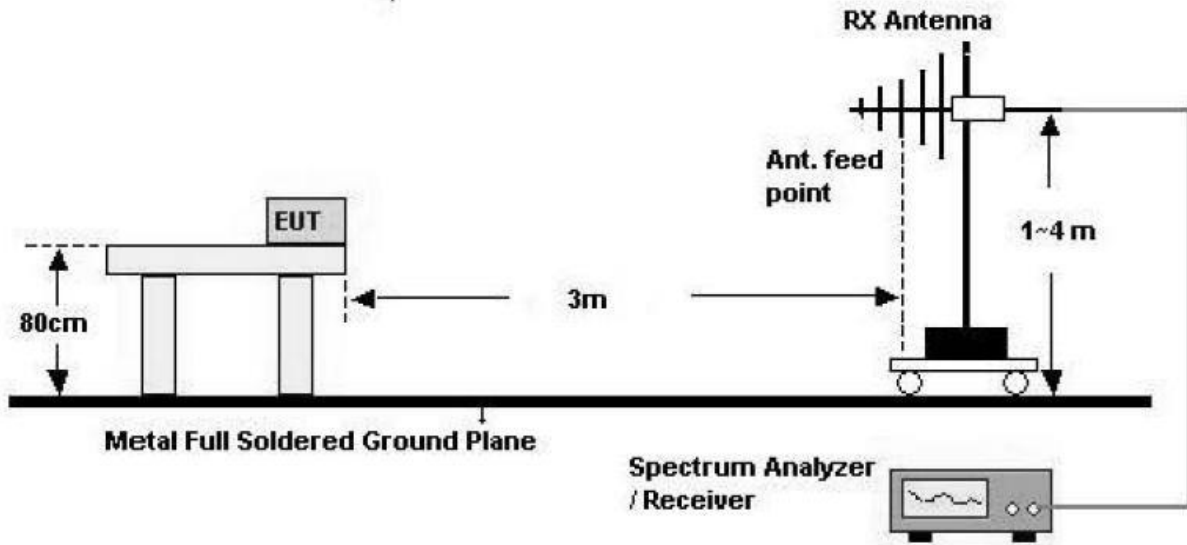

3. Above 1 GHz

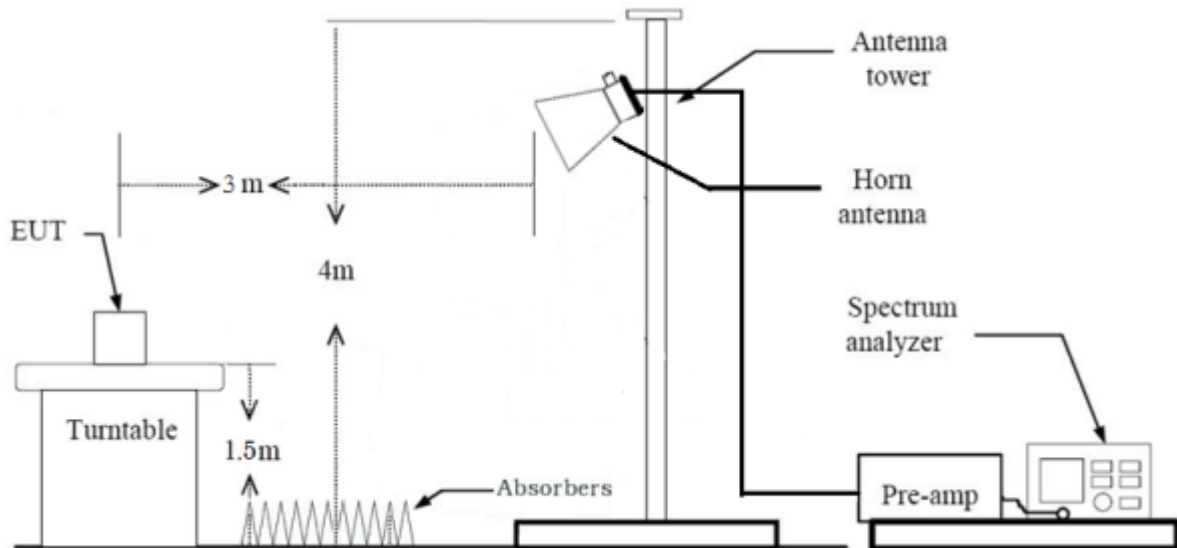

11.3 Test Date

November 24, 2020 ~ November 30, 2020

11.4 Test Data


11.4.1 Test data for 30 MHz ~ 1 GHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Premium Magic Remote

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

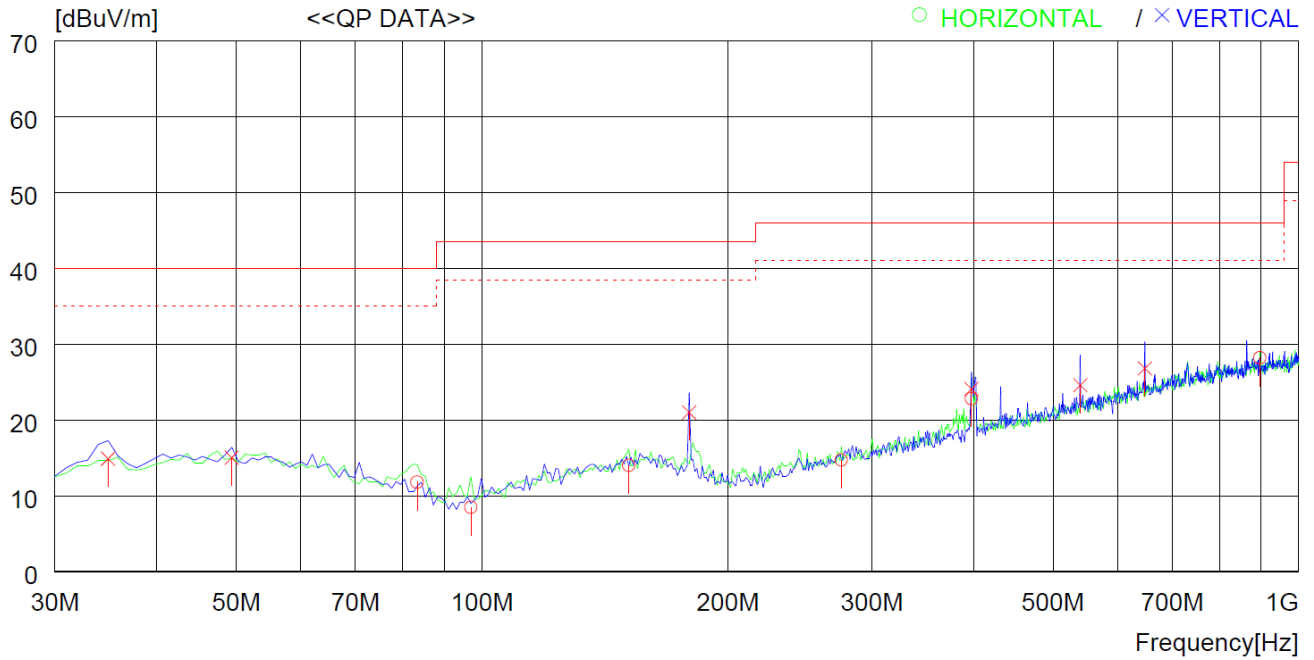

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	83.350	35.9	7.8	0.8	32.7	11.8	40.0	28.2	300	359
2	96.930	31.4	8.9	0.9	32.7	8.5	43.5	35.0	100	359
3	151.250	33.6	11.8	1.2	32.6	14.0	43.5	29.5	300	359
4	275.410	34.0	11.8	1.6	32.7	14.7	46.0	31.3	100	353
5	397.630	37.2	16.4	1.9	32.7	22.8	46.0	23.2	300	270
6	896.199	34.1	23.2	2.9	32.0	28.2	46.0	17.8	200	46
----- Vertical -----										
7	34.850	35.9	11.1	0.5	32.6	14.9	40.0	25.1	400	299
8	49.400	37.2	9.9	0.6	32.7	15.0	40.0	25.0	200	320
9	179.380	39.2	13.1	1.3	32.6	21.0	43.5	22.5	100	0
10	397.630	38.5	16.4	1.9	32.7	24.1	46.0	21.9	100	0
11	540.220	36.6	18.6	2.3	32.9	24.6	46.0	21.4	100	81
12	647.887	36.9	20.4	2.5	33.0	26.8	46.0	19.2	100	147

11.4.2 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.4.3 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40	Rohde & Schwarz	Signal Analyzer	101009	Feb. 21, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 27, 2020 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 16, 2020 (1Y)
BBV 9718 B	Schwarzbeck	Broadband Preamplifier	00009	Mar. 16, 2020 (1Y)
SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Feb. 20, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 15, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 08, 2020 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 23, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)
FMZB1513	Schwarzbeck	Active Loop Antenna	1513-235	Oct.28.2020(2Y)