

EVALUATION REPORT

for Certification of Conformity

FCC Part 18

Applicant: LG Electronics USA, Inc.
111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632,
Attn: David Kim / Team leader

Date of Issue: Oct. 07, 2024
Order Number: GETEC-C1-24-710
Test Report Number: GETEC-E3-24-128
Test Site: GUMI UNIVERSITY EMC CENTER
CAB Designation Number: KR0033

FCC ID. :	BEJQ40A41IB
Applicant:	LG Electronics USA, Inc.

Rule Part(s)	: FCC Part 18
Test Method	: FCC/OET MP-5
EUT Type	: HOUSEHOLD COOKTOP
Equipment Class	: Part 18 Consumer Device(8CC)
Type of Authority	: Certification
Model Name	: SKSIT3001GE
Family Model Name	: CBIS3018BE, CBIK3019GE
Trade Mark	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,



Reviewed by,



Tak Dong Kim, Associate Engineer
GUMI UNIVERSITY EMC CENTER

Sung Joo Park, Technical Manager
GUMI UNIVERSITY EMC CENTER

GETEC-QP-16-008 (Rev.01)

EMC CENTER

This test report only contains the result of a specific sample supplied by applicant for the testing. It is not allowed to copy this report even partly without the approval of EMC center



Revision list

Test Report No.	Issue Date	Description
GETEC-E3-24-128	Oct. 07, 2024	First Approval Test Report

※ This test report is not related to the accredited test result by ISO/IEC 17025 and KOLAS





CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	6
3. PRODUCT INFORMATION	7
3.1 DESCRIPTION OF EUT.....	7
3.2 SUPPORT EQUIPMENT / CABLES USED	8
3.3 MODIFICATION ITEM(S).....	8
4. DESCRIPTION OF TESTS.....	9
4.1 TEST CONDITION.....	9
5. SUMMARY OF TEST RESULTS	9
6. CONDUCTED EMISSION.....	10
6.1 OPERATING ENVIRONMENT	11
6.2 TEST SET-UP	11
6.3 MEASUREMENT UNCERTAINTY.....	11
6.4 LIMIT	12
6.5 TEST EQUIPMENT USED.....	12
6.6 TEST DATA FOR CONDUCTED EMISSION	12
7. RADIATED EMISSION	21
7.1 OPERATING ENVIRONMENT	21
7.2 TEST SET-UP	21
7.3 MEASUREMENT UNCERTAINTY.....	23
7.4 LIMIT	24
7.5 TEST EQUIPMENT USED.....	24
7.6 TEST DATA FOR RADIATED EMISSION.....	25
8. SAMPLE CALCULATIONS.....	43
8.1 EXAMPLE 1 :	43
8.2 EXAMPLE 2 :	43
9. RECOMMENDATION & CONCLUSION.....	44
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – INFORMATION OF CLASS II PERMISSIVE CHANGE	
APPENDIX C – SCHEMATIC DIAGRAM	
APPENDIX D – TEST SETUP PHOTOGRAPH	
APPENDIX E – INTERNAL PHOTOGRAPH	
APPENDIX F – RF EXPOSURE EVALUATION	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA, Inc.

**Applicant Address: 111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632**

Manufacturer: LG Electronics Inc.

**Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 51533, Korea**

Manufacturer: Shinsung Delta Tech Co., LTD.

**1. Manufacturer Address: 39, Gongdan-ro 271 beon-gil, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 51558, Korea**

**2. Manufacturer Address: Standard Factory 6, 200 Free Trade 3-gil, Masanhoewon-gu,
Changwon-si, Gyeongsangnam-do, 51340, Korea**

Contact Person: David Kim / Team leader

Telephone Number: 1-201-266-2443



- **FCC ID.** BEJQ40A41IB
- **EUT Type** HOUSEHOLD COOKTOP
- **Model Name** SKSIT3001GE
- **Family Model Name** CBIS3018BE, CBIK3019GE
- **Rule Part(s)** FCC Part 18
- **Test Method** FCC/OET MP-5
- **Type of Authority** Certification
- **Test Procedure(s)** FCC/OET MP-5
- **Dates of Test** Sep. 27, 2024 ~ Oct. 05, 2024
- **Place of Test**
GUMI UNIVERSITY EMC CENTER
(FCC Test Firm Registration Number: 269701)
(ISED Test Site Registration Number: 7920A)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.
- **Test Report Number** GETEC-E3-24-128
- **Dates of Issue** Oct. 07, 2024



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2017) was used in determining radiated and conducted emissions emanating from **HOUSEHOLD COOKTOP (Model name: SKSIT3001GE)**.

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.

This test site is one of the highest point of Gumi UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2017)

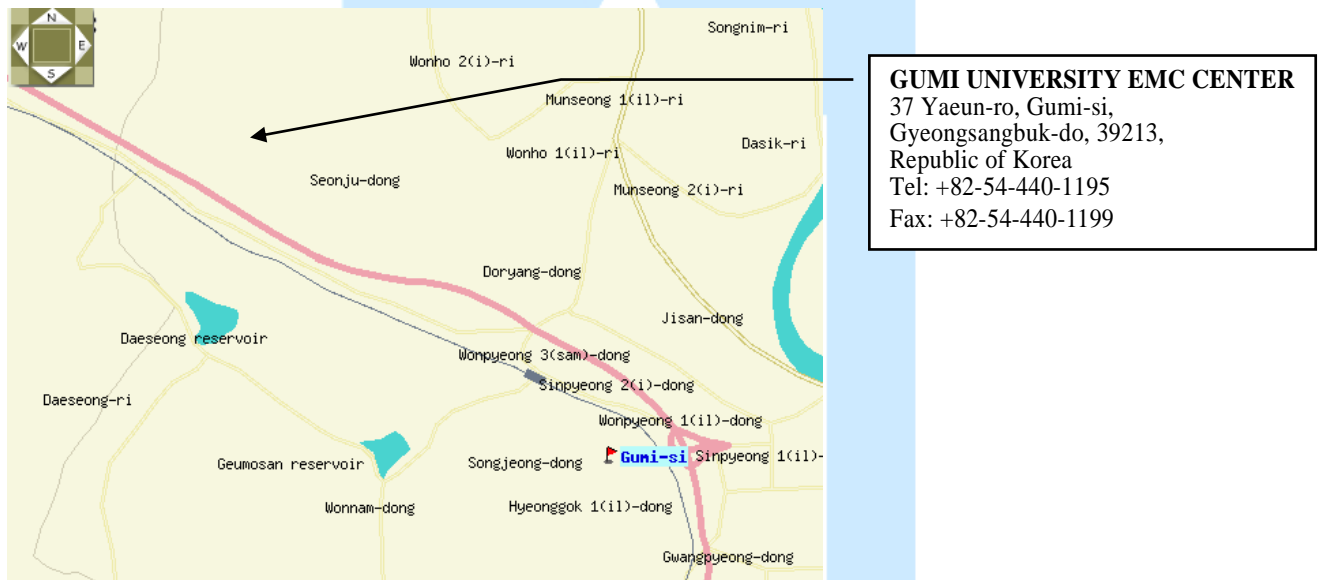


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **HOUSEHOLD COOKTOP (Model Name: SKSIT3001GE)**
FCC ID.: BEJQ40A411B

Models		SKSIT3001GE	
Description		Induction Cooktop	
Electrical Specifications	Connection voltage	240/208 VAC 60 Hz., 39.2 A / 37.0 A	
	Maximum connected power load	9400 W / 7688 W	
Cooktop Dimensions		30 11/16" (781 mm) (W) × 4 1/8" (105 mm) (H) × 21 1/16" (534 mm) (D)	
Countertop Cutout Dimensions		Standard Installation 28 1/2" (724 mm) (W) × 5 3/4" (146 mm) (H) × 19 5/8" (498 mm) (D) Flush Installation 31" (787 mm) (W) × 6 1/16" (153 mm) (H) × 21 1/4" (540 mm) (D)	
Cooking Zones	Position	Size	Power (Level 9 / Boost)
	Front Left	8 1/2" x 7 1/8" (216.2 mm x 180.2 mm)	1513/3026 W (208 V) 1850/3700 W (240 V)
	Front Right	6 1/2" (165 mm)	1145/1472 W (208 V) 1400/1800 W (240 V)
	Rear Left	8 1/2" x 7 1/8" (216.2 mm x 180.2 mm)	1513/3026 W (208 V) 1850/3700 W (240 V)
	Flex Left	8 1/2" x 14 3/16" (216.2 mm x 360.4 mm)	2699/3026 W (208 V) 3300/3700 W (240 V)
	Center	11 1/8" / 7 1/16" (283 mm / 180 mm)	Inner Burner: 1513/3026 W (208 V) 1850/3700 W (240 V) Dual Burner: 3026/4662 W (208 V) 3700/5700 W (240 V)

RF Module Specifications

Type	Frequency Range	Output Power (Max)
Wi-Fi	2412 MHz - 2462 MHz	< 30 dBm
Bluetooth	2402 MHz - 2480 MHz	

Induction heating mode

Cooking Element	Low frequency (Maximum power)	High frequency (Minimum power)
#1 Left Front Hob	30 kHz	65 kHz
#2 Left Rear Hob	30 kHz	65 kHz
#3 Center	30 kHz	65 kHz
#4 Right Front Hob	30 kHz	65 kHz



3.2 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See "Appendix D – Test Setup Photographs" for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
WLAN module	LG Electronics Inc.	LCWB-002	S/N: -. FCC ID.: BEJ-LCWB002

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.80 m Unshielded.

3.3 Modification Item(s)

-. None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 208V/ 60 Hz, AC 240 V / 60 Hz
- Operating condition during the test(s) :
 This device has been tested in the configurations of Induction mode with WLAN module operating.
Induction mode: This device has been operated (boost mode) with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

Cooking element "1"= left front hob ,"2"= left rear hob, "3"= Center hob, "4"= right hob

Cooking vessels

"1" ,"2"= 215 mm x 180 mm

"3"= 300 mm

"4"=180 mm

4.2 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2017) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2017).

5. Summary of Test Results

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Emission	Pass
§18.307	Conducted Emission	Pass



6. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.
(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Rohde & Schwarz LISN Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

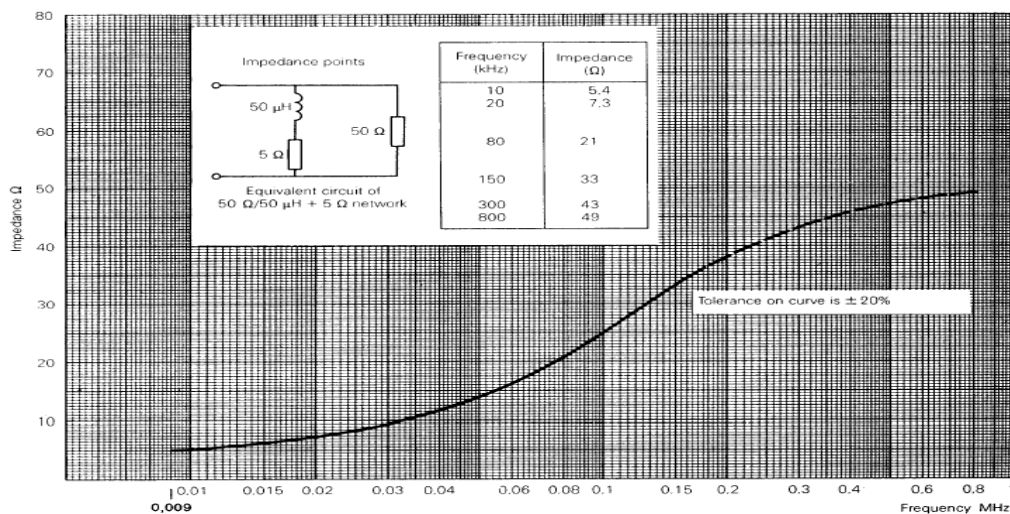


Fig 2. Impedance of LISN



6.1 Operating Environment

Temperature : 23.5 °C
Relative Humidity : 62.3 %
Air Pressure : 100.5 kPa

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.83 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.44 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



6.4 Limit

RFI Conducted	FCC Limit(dB μ V/m)	
	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 03, 2024
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 03, 2024
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 03, 2024
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 04, 2024
■ - VTSD 9561-D	SCHWARZBECK	Pulse Limiter	32	Apr. 04, 2024
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A

6.6 Test data for Conducted Emission

- Test Date : Sep. 27, 2024 ~ Sep. 28, 2024
- Resolution Bandwidth : 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range : 9 kHz ~ 30 MHz
- Line : L1: Live, L2: Live
- Comment : None



- Operating condition: Induction mode with WLAN
- AC 208 V / 60 Hz**
Cooking element #1

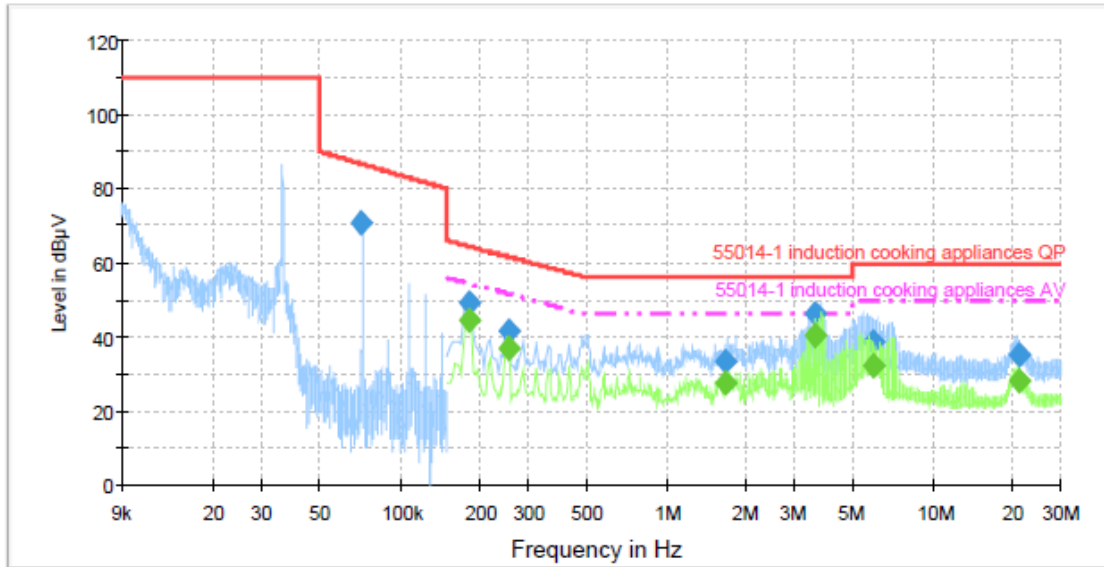

— 55014-1 induction cooking appliances QP - - - 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ ◆ Final Result 1-QPK
— Preview Result 2-AVG ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.071185	71.0	1000.0	0.200	GND	L2	20.1	15.8	86.8	
0.182000	49.0	1000.0	9.000	GND	L2	20.6	15.4	64.4	
0.253744	41.7	1000.0	9.000	GND	L1	20.7	20.0	61.6	
1.664156	33.1	1000.0	9.000	GND	L2	20.6	22.9	56.0	
3.582825	46.5	1000.0	9.000	GND	L2	20.7	9.5	56.0	
5.927662	38.6	1000.0	9.000	GND	L2	20.7	21.5	60.0	
20.759081	34.9	1000.0	9.000	GND	L1	21.0	25.1	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.182000	44.3	1000.0	9.000	GND	L2	20.6	10.1	54.4	
0.253744	37.0	1000.0	9.000	GND	L1	20.7	14.7	51.6	
1.664156	27.7	1000.0	9.000	GND	L2	20.6	18.3	46.0	
3.582825	40.6	1000.0	9.000	GND	L2	20.7	5.4	46.0	
5.927662	32.2	1000.0	9.000	GND	L2	20.7	17.8	50.0	
20.759081	27.9	1000.0	9.000	GND	L1	21.0	22.1	50.0	



Cooking element #2

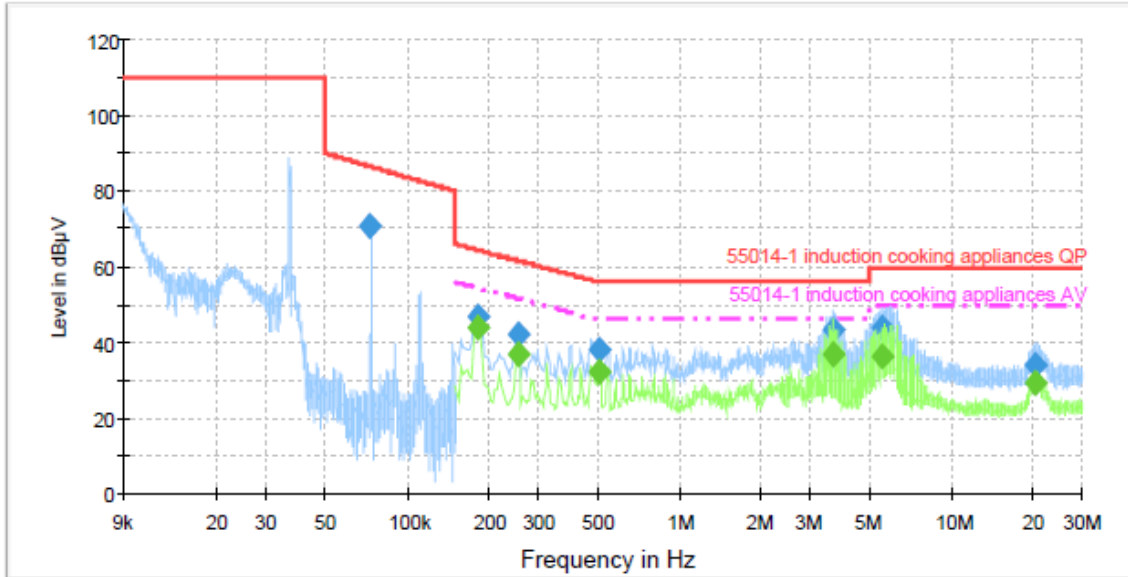

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.072736	70.8	1000.0	0.200	GND	L2	20.1	15.8	86.6	
0.182000	46.8	1000.0	9.000	GND	L1	20.7	17.6	64.4	
0.253206	42.0	1000.0	9.000	GND	L1	20.7	19.7	61.7	
0.509081	38.0	1000.0	9.000	GND	L2	20.6	18.0	56.0	
3.667569	43.0	1000.0	9.000	GND	L2	20.7	13.0	56.0	
5.559850	44.1	1000.0	9.000	GND	L2	20.7	15.9	60.0	
20.173306	33.8	1000.0	9.000	GND	L2	20.9	26.2	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.182000	44.0	1000.0	9.000	GND	L1	20.7	10.4	54.4	
0.253206	37.2	1000.0	9.000	GND	L1	20.7	14.5	51.7	
0.509081	31.9	1000.0	9.000	GND	L2	20.6	14.1	46.0	
3.667569	37.0	1000.0	9.000	GND	L2	20.7	9.0	46.0	
5.559850	36.2	1000.0	9.000	GND	L2	20.7	13.8	50.0	
20.173306	29.0	1000.0	9.000	GND	L2	20.9	21.0	50.0	



Cooking element #3

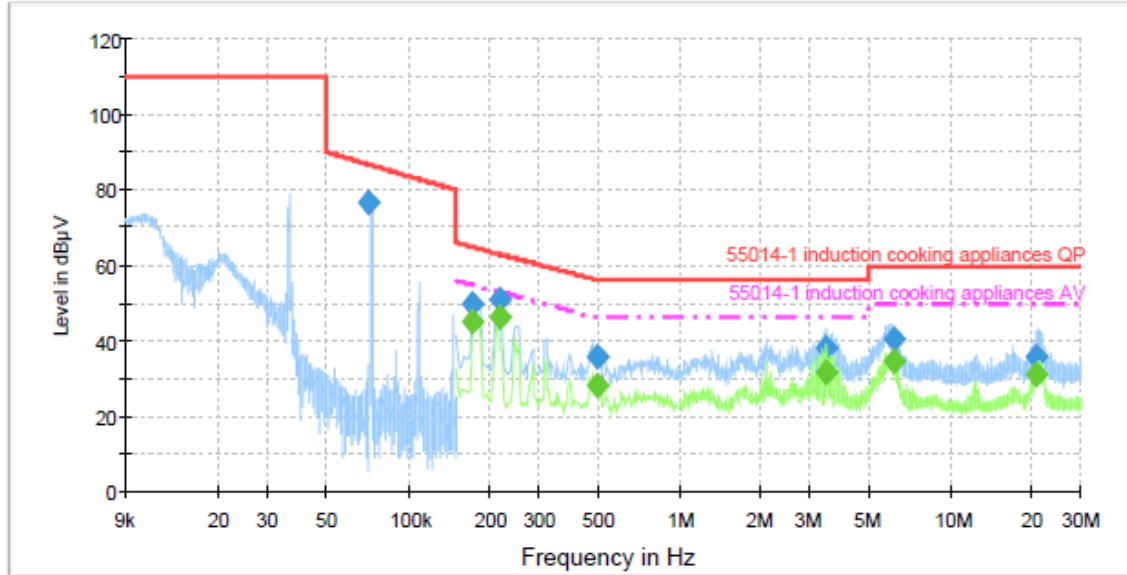

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.071538	76.6	1000.0	0.200	GND	L2	20.1	10.1	86.7	
0.172700	50.0	1000.0	9.000	GND	L1	20.7	14.8	64.8	
0.215256	50.8	1000.0	9.000	GND	L2	20.6	12.2	63.0	
0.500275	35.9	1000.0	9.000	GND	L1	20.7	20.1	56.0	
3.468200	38.2	1000.0	9.000	GND	L1	20.7	17.8	56.0	
6.135806	40.1	1000.0	9.000	GND	L2	20.8	19.9	60.0	
20.606131	35.6	1000.0	9.000	GND	L1	21.0	24.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.172700	45.3	1000.0	9.000	GND	L1	20.7	9.5	54.8	
0.215256	46.3	1000.0	9.000	GND	L2	20.6	6.7	53.0	
0.500275	27.9	1000.0	9.000	GND	L1	20.7	18.1	46.0	
3.468200	31.4	1000.0	9.000	GND	L1	20.7	14.6	46.0	
6.135806	34.7	1000.0	9.000	GND	L2	20.8	15.3	50.0	
20.606131	30.8	1000.0	9.000	GND	L1	21.0	19.2	50.0	



Cooking element #4

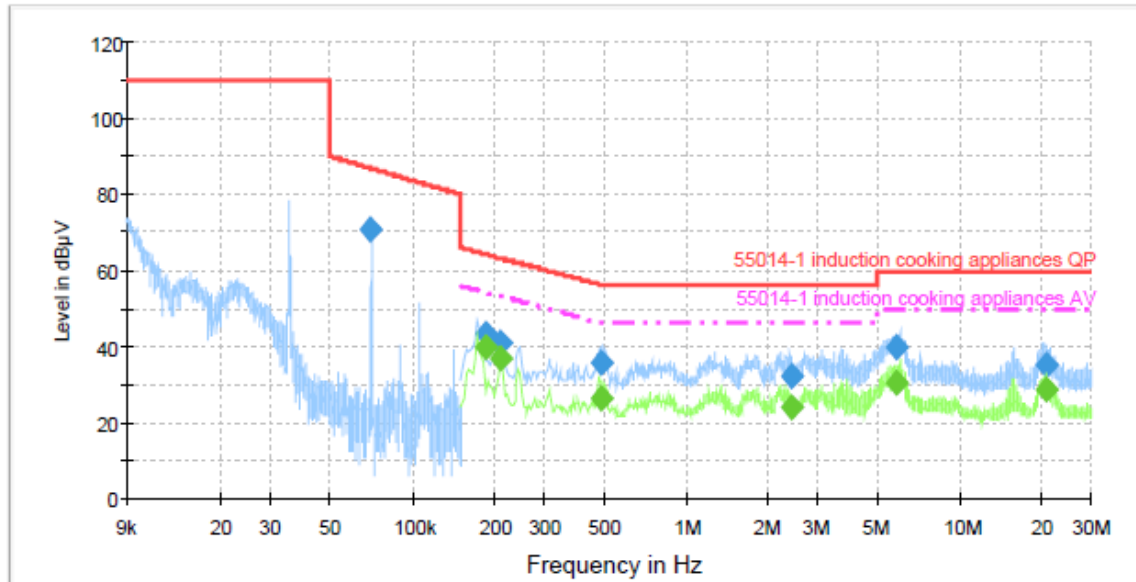

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.069863	70.7	1000.0	0.200	GND	L2	20.2	16.3	87.0	
0.186000	43.3	1000.0	9.000	GND	L2	20.6	21.0	64.2	
0.210012	41.2	1000.0	9.000	GND	L1	20.7	22.0	63.2	
0.492006	36.0	1000.0	9.000	GND	L2	20.6	20.2	56.1	
2.403212	32.0	1000.0	9.000	GND	L1	20.7	24.0	56.0	
5.833812	39.6	1000.0	9.000	GND	L2	20.7	20.4	60.0	
20.722338	35.4	1000.0	9.000	GND	L1	21.0	24.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.186000	39.6	1000.0	9.000	GND	L2	20.6	14.6	54.2	
0.210012	36.8	1000.0	9.000	GND	L1	20.7	16.4	53.2	
0.492006	26.3	1000.0	9.000	GND	L2	20.6	19.8	46.1	
2.403212	23.7	1000.0	9.000	GND	L1	20.7	22.3	46.0	
5.833812	30.4	1000.0	9.000	GND	L2	20.7	19.6	50.0	
20.722338	28.6	1000.0	9.000	GND	L1	21.0	21.4	50.0	



AC 240 V / 60 Hz
Cooking element #1

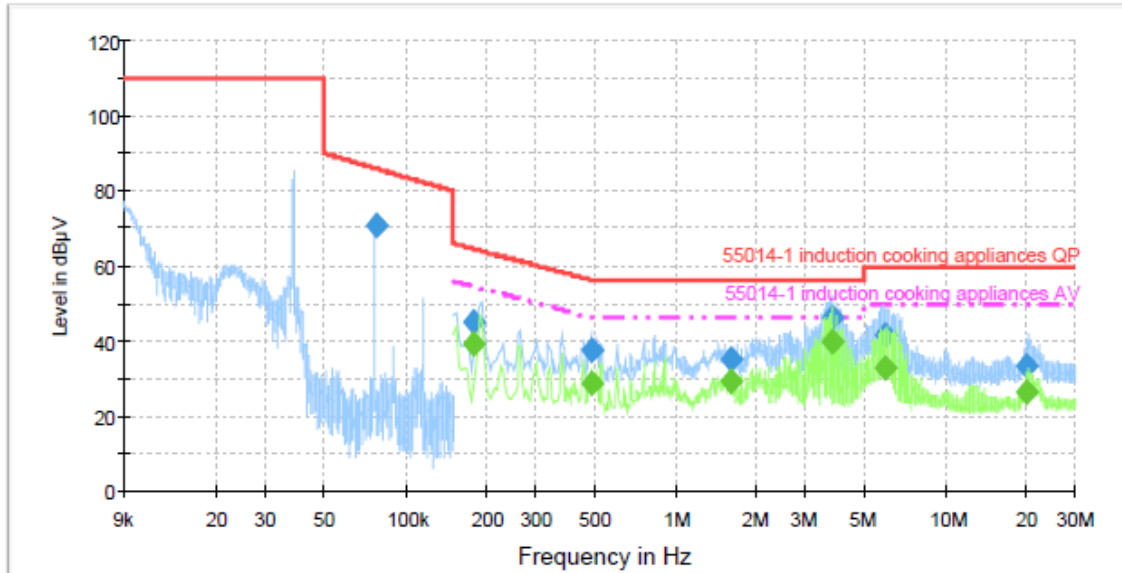

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.077662	71.0	1000.0	0.200	GND	L2	20.1	15.0	86.0	
0.178000	45.3	1000.0	9.000	GND	L1	20.7	19.3	64.6	
0.489856	37.4	1000.0	9.000	GND	L1	20.7	18.8	56.2	
1.606575	34.9	1000.0	9.000	GND	L2	20.6	21.1	56.0	
3.788581	46.3	1000.0	9.000	GND	L2	20.7	9.7	56.0	
5.944944	41.4	1000.0	9.000	GND	L2	20.7	18.6	60.0	
19.933969	33.4	1000.0	9.000	GND	L2	21.0	26.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.178000	39.1	1000.0	9.000	GND	L1	20.7	15.5	54.6	
0.489856	29.0	1000.0	9.000	GND	L1	20.7	17.2	46.2	
1.606575	29.4	1000.0	9.000	GND	L2	20.6	16.6	46.0	
3.788581	39.7	1000.0	9.000	GND	L2	20.7	6.3	46.0	
5.944944	32.7	1000.0	9.000	GND	L2	20.7	17.3	50.0	
19.933969	26.3	1000.0	9.000	GND	L2	21.0	23.7	50.0	



Cooking element #2

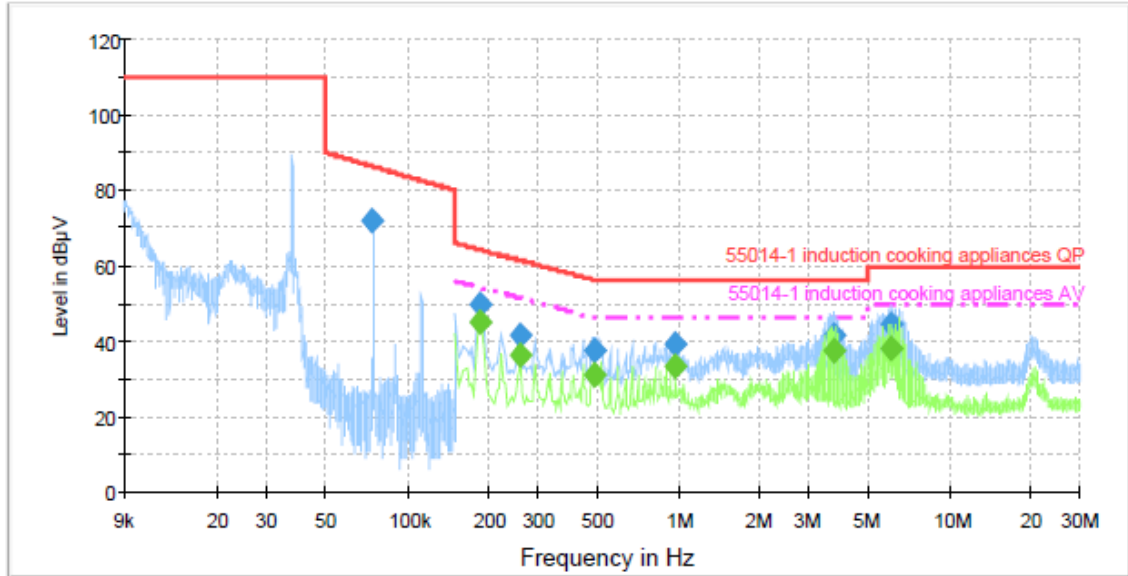

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.073935	71.9	1000.0	0.200	GND	L1	20.2	14.5	86.4	
0.186000	49.8	1000.0	9.000	GND	L1	20.7	14.4	64.2	
0.260938	41.5	1000.0	9.000	GND	L1	20.7	19.9	61.4	
0.488544	37.6	1000.0	9.000	GND	L2	20.6	18.6	56.2	
0.969606	39.0	1000.0	9.000	GND	L2	20.6	17.0	56.0	
3.713688	41.6	1000.0	9.000	GND	L1	20.8	14.4	56.0	
6.065956	44.7	1000.0	9.000	GND	L2	20.7	15.3	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.186000	45.2	1000.0	9.000	GND	L1	20.7	9.0	54.2	
0.260938	36.3	1000.0	9.000	GND	L1	20.7	15.1	51.4	
0.488544	30.9	1000.0	9.000	GND	L2	20.6	15.3	46.2	
0.969606	33.4	1000.0	9.000	GND	L2	20.6	12.6	46.0	
3.713688	37.3	1000.0	9.000	GND	L1	20.8	8.7	46.0	
6.065956	38.2	1000.0	9.000	GND	L2	20.7	11.8	50.0	



Cooking element #3

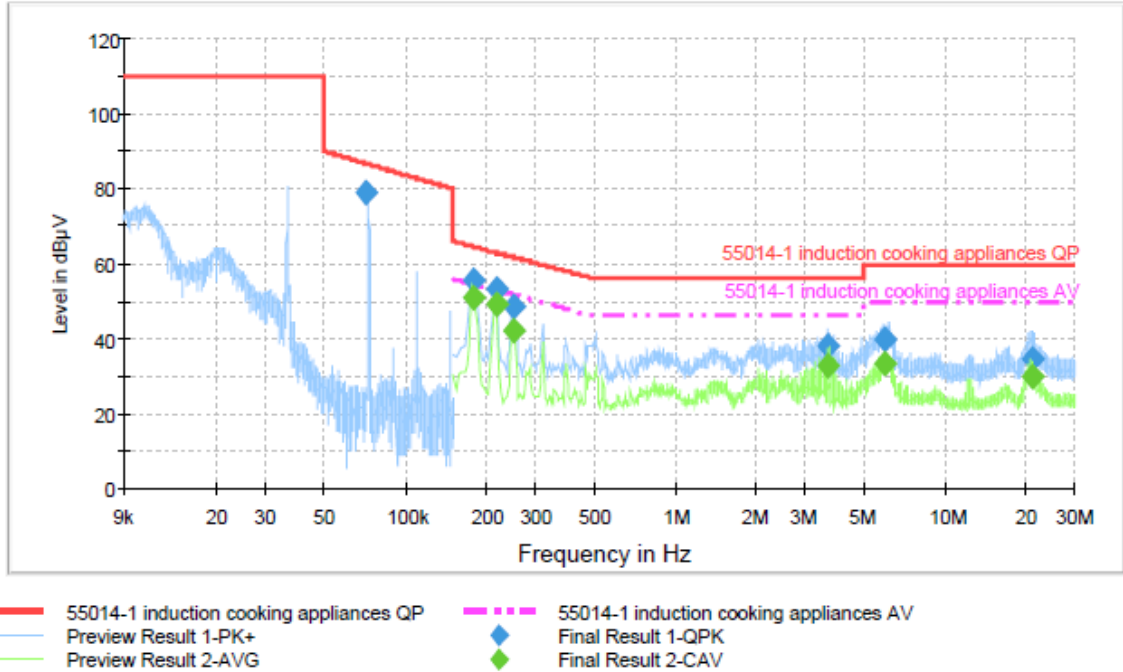

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.071767	78.8	1000.0	0.200	GND	L2	20.1	7.9	86.7	
0.178000	55.8	1000.0	9.000	GND	L2	20.6	8.8	64.6	
0.215256	53.4	1000.0	9.000	GND	L2	20.6	9.6	63.0	
0.248714	48.4	1000.0	9.000	GND	L1	20.7	13.4	61.8	
3.625988	38.2	1000.0	9.000	GND	L1	20.7	17.8	56.0	
5.962556	39.7	1000.0	9.000	GND	L2	20.8	20.3	60.0	
20.967225	34.4	1000.0	9.000	GND	L1	21.0	25.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.178000	50.7	1000.0	9.000	GND	L2	20.6	3.9	54.6	
0.215256	49.0	1000.0	9.000	GND	L2	20.6	4.0	53.0	
0.248714	42.4	1000.0	9.000	GND	L1	20.7	9.4	51.8	
3.625988	33.0	1000.0	9.000	GND	L1	20.7	13.0	46.0	
5.962556	33.6	1000.0	9.000	GND	L2	20.8	16.4	50.0	
20.967225	29.6	1000.0	9.000	GND	L1	21.0	20.4	50.0	



Cooking element #4

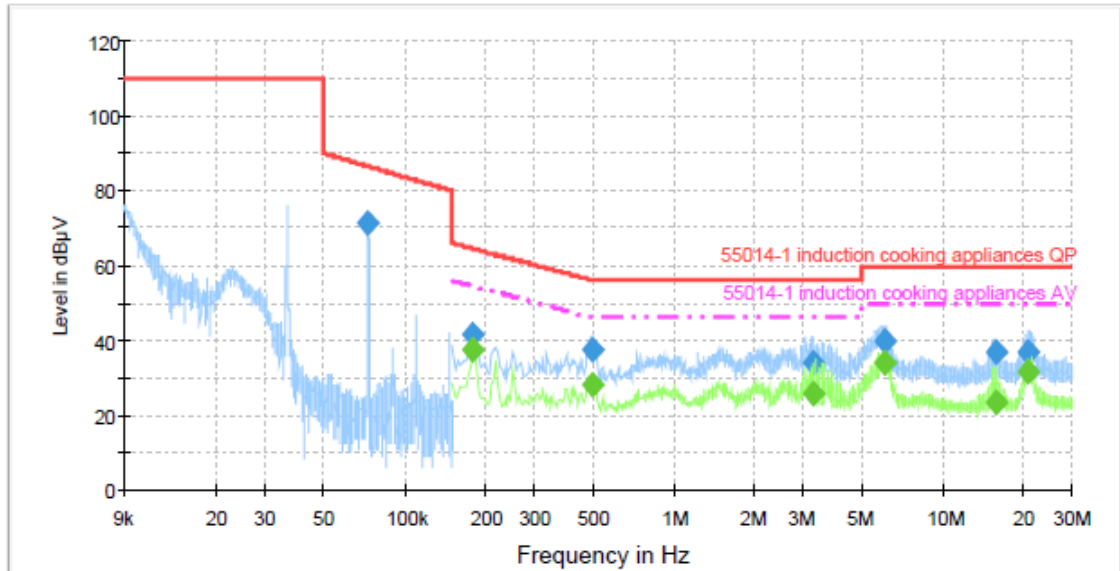

— 55014-1 induction cooking appliances QP
— Preview Result 1-PK+
— Preview Result 2-AVG
- - - 55014-1 induction cooking appliances AV
◆ Final Result 1-QPK
◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.072119	71.3	1000.0	0.200	GND	L2	20.1	15.4	86.7	
0.177539	41.3	1000.0	0.200	GND	L2	20.3	24.7	66.0	
0.496812	37.7	1000.0	9.000	GND	L1	20.7	18.4	56.1	
3.270981	33.7	1000.0	9.000	GND	L1	20.7	22.3	56.0	
6.008912	40.0	1000.0	9.000	GND	L1	20.8	20.0	60.0	
15.601988	37.1	1000.0	9.000	GND	L1	20.9	22.9	60.0	
20.676219	36.6	1000.0	9.000	GND	L1	21.0	23.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.177539	37.5	1000.0	9.000	GND	L2	20.6	17.1	54.6	
0.496812	27.8	1000.0	9.000	GND	L1	20.7	18.3	46.1	
3.270981	26.0	1000.0	9.000	GND	L1	20.7	20.0	46.0	
6.008912	33.7	1000.0	9.000	GND	L1	20.8	16.3	50.0	
15.601988	23.7	1000.0	9.000	GND	L1	20.9	26.3	50.0	
20.676219	31.5	1000.0	9.000	GND	L1	21.0	18.5	50.0	



7. Radiated Emission

7.1 Operating Environment

Temperature : 20.6 °C
Relative Humidity : 46.2 %
Air Pressure : 100.2 kPa

7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16 / ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

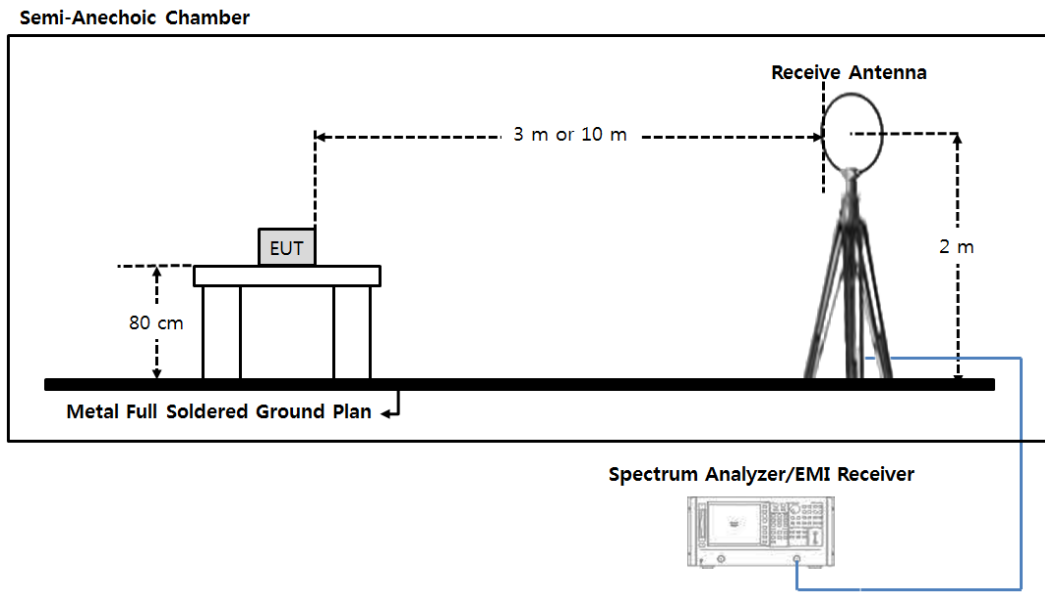


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

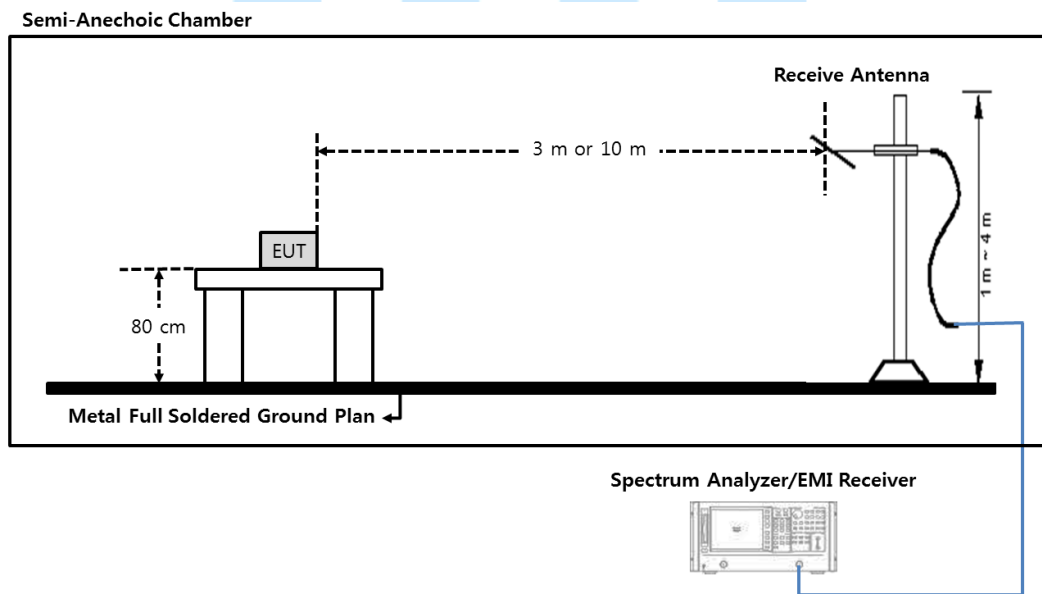


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)



7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.64 dB	Confidence level of approximately 95 % ($k = 2$)
Test items (3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.23 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 GHz ~ 6 GHz, 3 m)	4.56 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 GHz ~ 18 GHz, 3 m)	4.89 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 GHz ~ 26 GHz, 3 m)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz	Any	10 (²)	1,600 (²)
	Above 5,725 MHz	Any		
Medical diathermy	Any ISM frequency	Any	25	300
	Any non-ISM frequency	Any	15	300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz	Any	$24,000/F(\text{kHz})$	30
	Above 1,600 kHz	Any	15	30
Induction cooking ranges	Below 90 kHz	Any	1,500	⁴ 30
	On or above 90 kHz	Any	300	⁴ 30

Note.

- 1) Field strength may not exceed 10 μV/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 μV/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 03, 2024
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Apr. 15, 2024
■ - CO3000	Innco system GmbH	Position Controller	CO3000/779/330 50314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
■ - EMC 32	Rohde & Schwarz	Software	Ver.10.60.20	N/A

All test equipment used is calibrated on a regular basis.



7.6 Test data for Radiated Emission

- Test Date : Oct. 05, 2024
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

- Measurement setting


Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz





-. Measurement Data: Induction mode with WLAN
 [AC 208V, 60 Hz]

Cooking Element #1_H

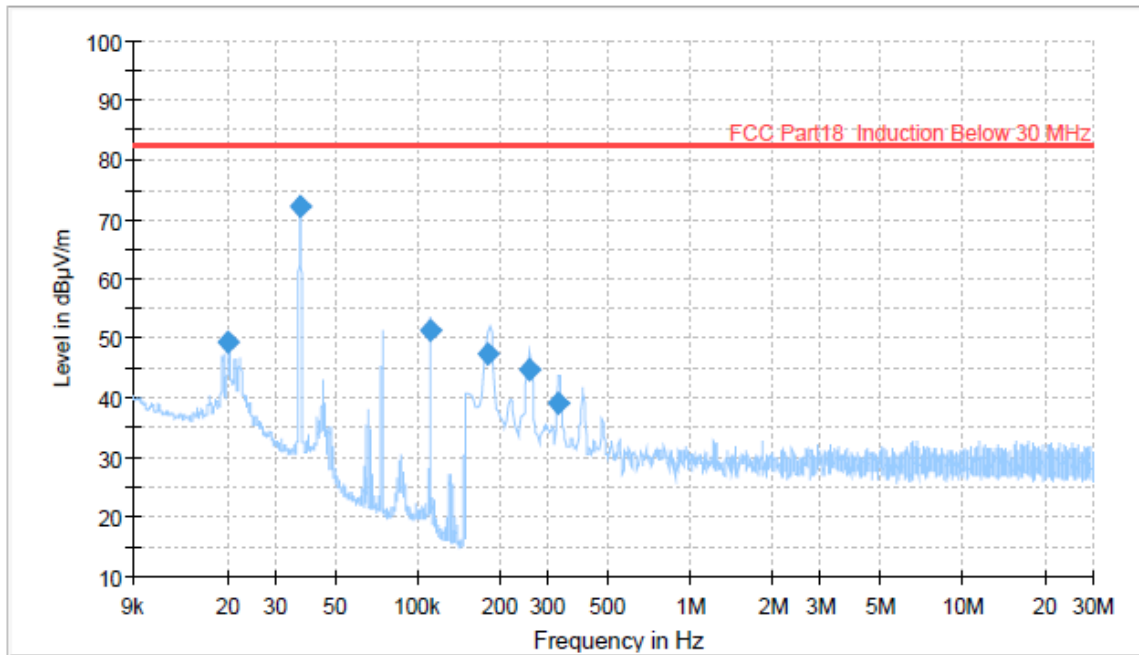


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020160	49.48	82.60	33.12	1000.0	0.200	H	51.0	20.3
0.037085	72.29	82.60	10.31	1000.0	0.200	H	113.0	20.1
0.110686	51.31	82.60	31.29	1000.0	0.200	H	113.0	20.0
0.182000	47.34	82.60	35.26	1000.0	9.000	H	113.0	20.0
0.256460	44.63	82.60	37.97	1000.0	9.000	H	113.0	20.0
0.329100	39.27	82.60	43.33	1000.0	9.000	H	113.0	20.0



Cooking Element #1_V

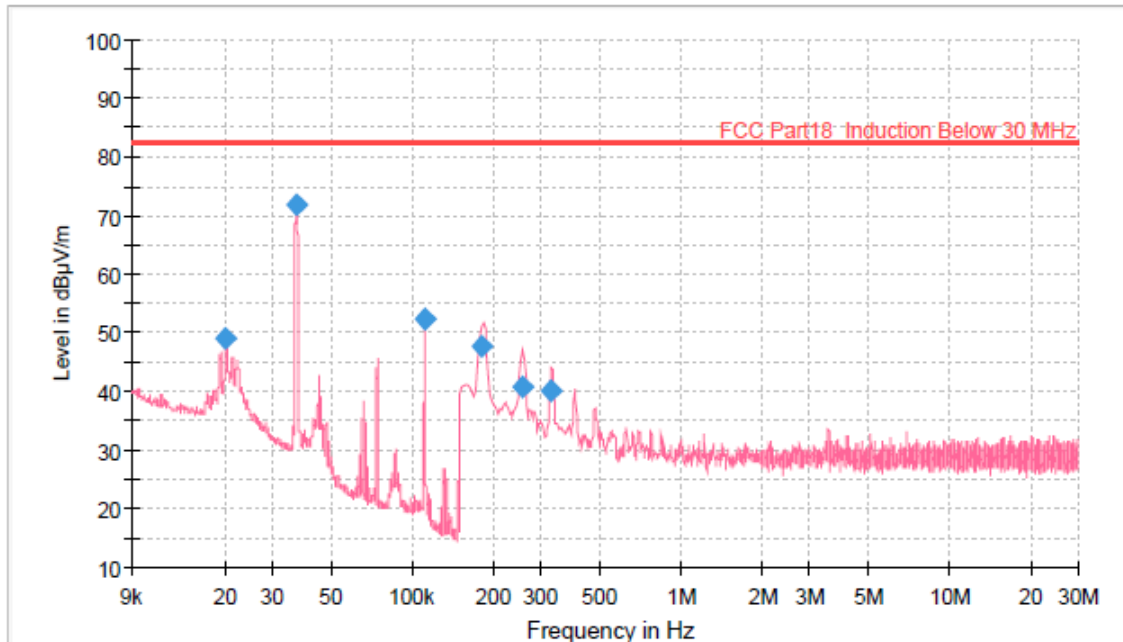


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	49.05	82.60	33.55	1000.0	0.200	V	143.0	20.3
0.037165	71.87	82.60	10.73	1000.0	0.200	V	181.0	20.1
0.110714	52.35	82.60	30.25	1000.0	0.200	V	43.0	20.0
0.182000	47.63	82.60	34.97	1000.0	9.000	V	34.0	20.0
0.256460	40.70	82.60	41.90	1000.0	9.000	V	0.0	20.0
0.329100	40.27	82.60	42.33	1000.0	9.000	V	58.0	20.0



Cooking Element #2_H

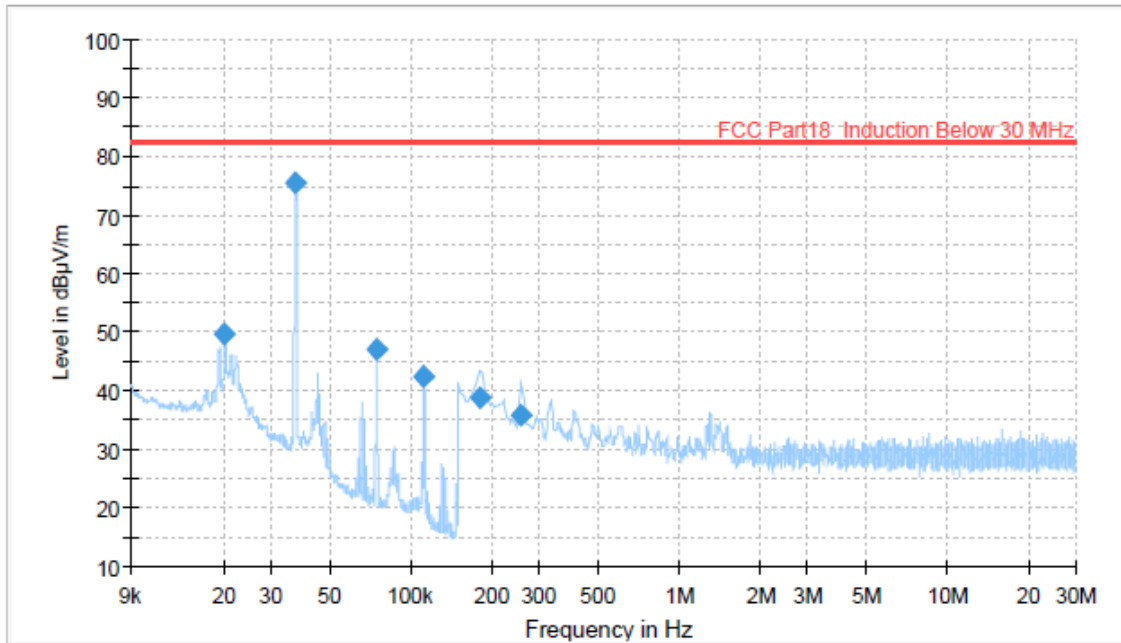


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020108	49.83	82.60	32.77	1000.0	0.200	H	60.0	20.3
0.036986	75.68	82.60	6.92	1000.0	0.200	H	74.0	20.1
0.074332	47.11	82.60	35.49	1000.0	0.200	H	119.0	20.0
0.110738	42.37	82.60	40.23	1000.0	0.200	H	74.0	20.0
0.179850	38.93	82.60	43.67	1000.0	9.000	H	231.0	20.0
0.257460	35.82	82.60	46.78	1000.0	9.000	H	105.0	20.0



Cooking Element #2_V

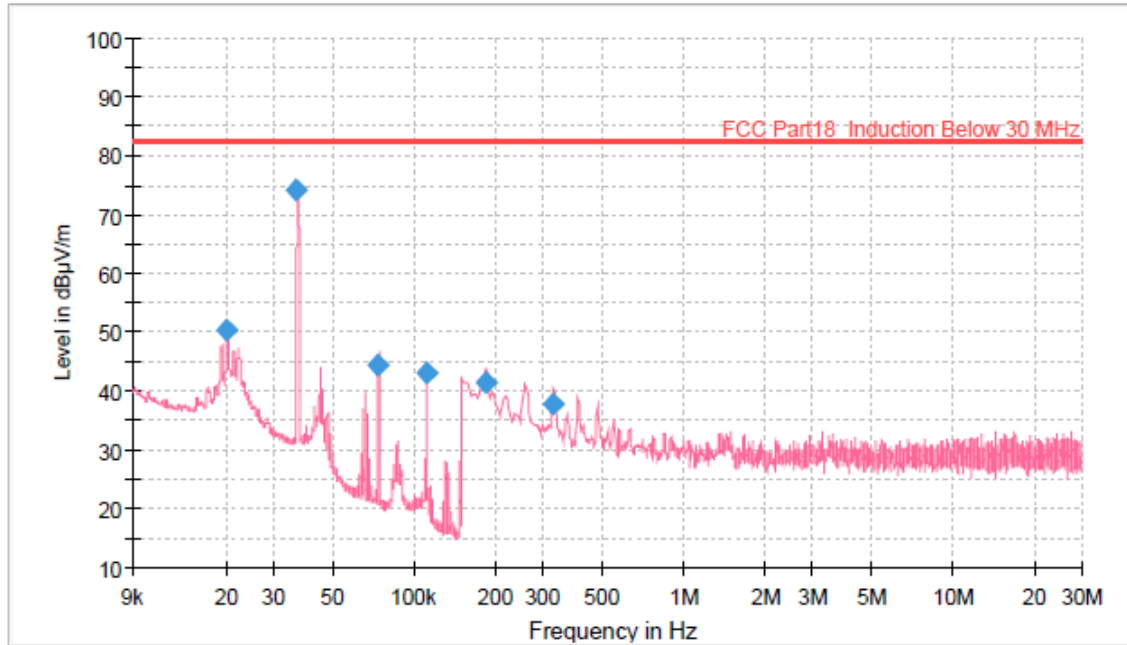


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	50.39	82.60	32.21	1000.0	0.200	V	315.0	20.3
0.036581	74.24	82.60	8.36	1000.0	0.200	V	169.0	20.1
0.073227	44.37	82.60	38.23	1000.0	0.200	V	36.0	20.0
0.110790	43.01	82.60	39.59	1000.0	0.200	V	169.0	20.0
0.182835	41.43	82.60	41.17	1000.0	9.000	V	173.0	20.0
0.329100	37.73	82.60	44.87	1000.0	9.000	V	182.0	20.0



Cooking Element #3_H

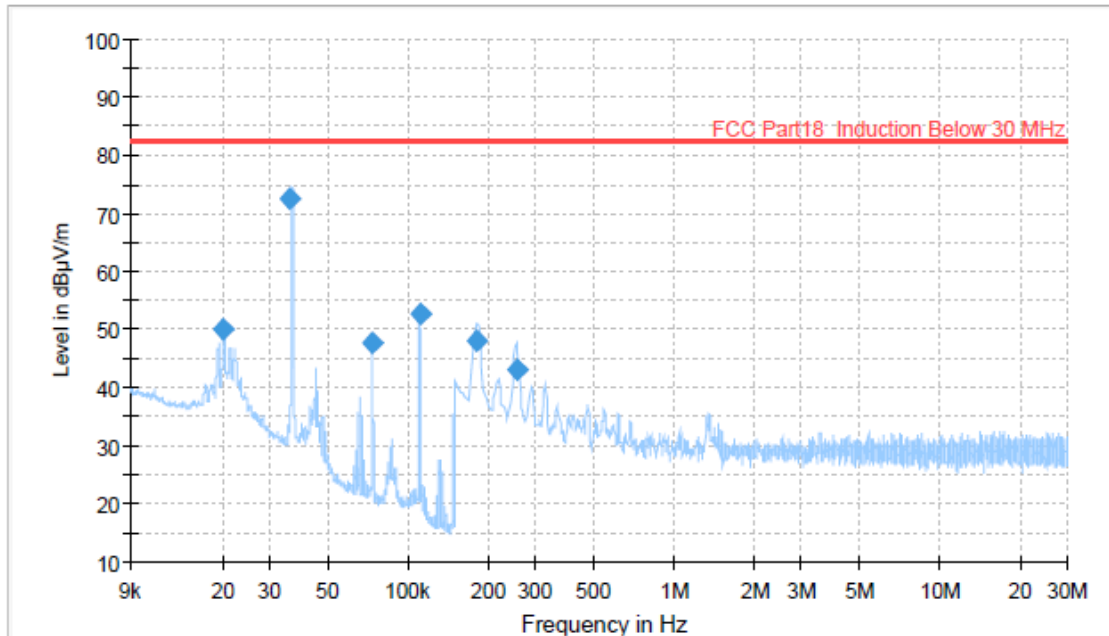


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020108	49.87	82.60	32.73	1000.0	0.200	H	270.0	20.3
0.035876	72.64	82.60	9.96	1000.0	0.200	H	100.0	20.1
0.073228	47.63	82.60	34.97	1000.0	0.200	H	316.0	20.0
0.110740	52.57	82.60	30.03	1000.0	0.200	H	100.0	20.0
0.179850	48.08	82.60	34.52	1000.0	9.000	H	116.0	20.0
0.254475	43.14	82.60	39.46	1000.0	9.000	H	89.0	20.0



Cooking Element #3_V

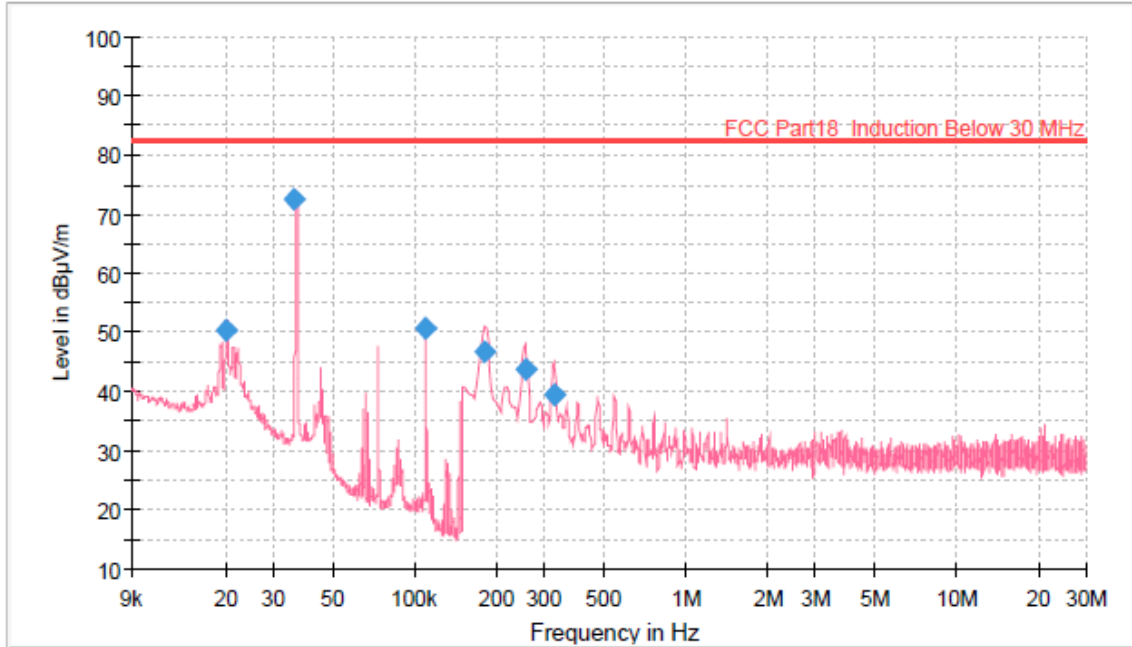


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020094	50.32	82.60	32.28	1000.0	0.200	V	199.0	20.3
0.035966	72.62	82.60	9.98	1000.0	0.200	V	173.0	20.1
0.109742	50.73	82.60	31.87	1000.0	0.200	V	173.0	20.0
0.179850	46.75	82.60	35.85	1000.0	9.000	V	173.0	20.0
0.254475	43.78	82.60	38.82	1000.0	9.000	V	179.0	20.0
0.326115	39.31	82.60	43.29	1000.0	9.000	V	131.0	20.0



Cooking Element #4_H

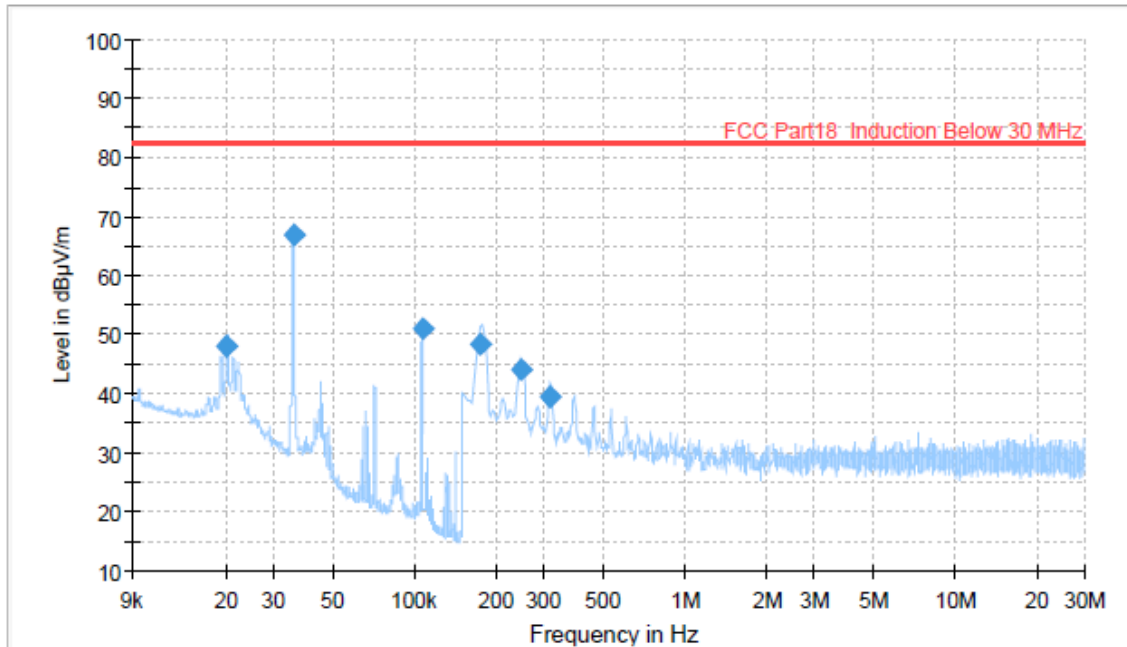


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	48.11	82.60	34.49	1000.0	0.200	H	225.0	20.3
0.035676	67.02	82.60	15.58	1000.0	0.200	H	300.0	20.1
0.107506	51.14	82.60	31.46	1000.0	0.200	H	212.0	20.0
0.174000	48.54	82.60	34.06	1000.0	9.000	H	189.0	20.0
0.248505	44.02	82.60	38.58	1000.0	9.000	H	197.0	20.0
0.317160	39.32	82.60	43.28	1000.0	9.000	H	153.0	20.0



Cooking Element #4_V

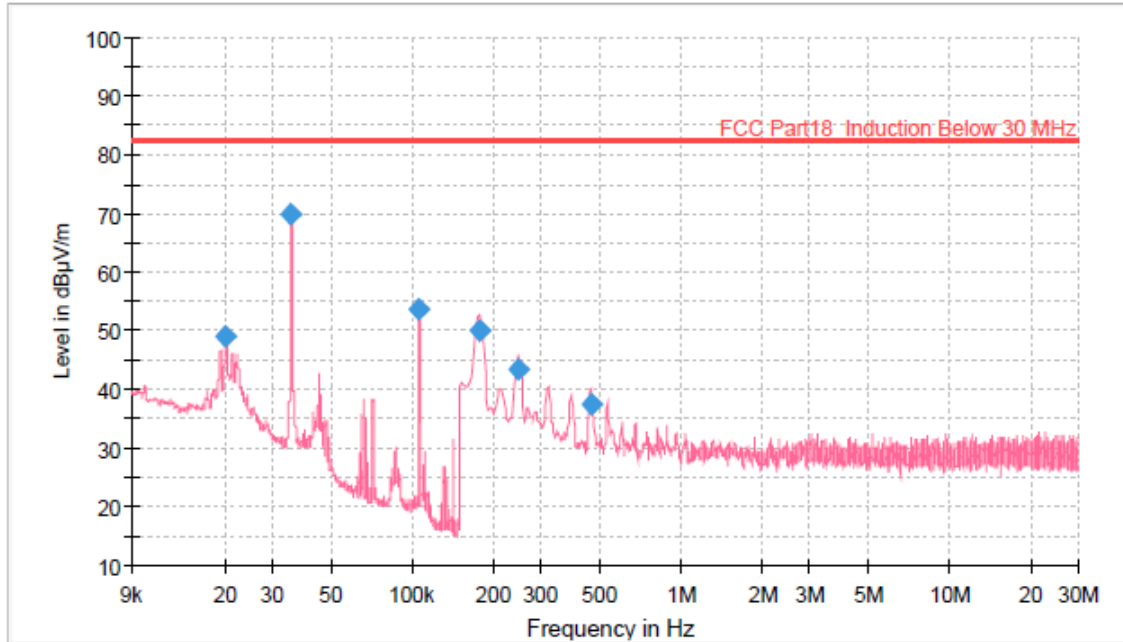

— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020108	48.91	82.60	33.69	1000.0	0.200	V	54.0	20.3
0.035355	70.02	82.60	12.58	1000.0	0.200	V	0.0	20.1
0.105789	53.60	82.60	29.00	1000.0	0.200	V	0.0	20.0
0.176865	50.07	82.60	32.53	1000.0	9.000	V	170.0	20.0
0.245520	43.50	82.60	39.10	1000.0	9.000	V	178.0	20.0
0.460440	37.47	82.60	45.13	1000.0	9.000	V	17.0	20.0



[AC 240V, 60 Hz]

Cooking Element #1_H

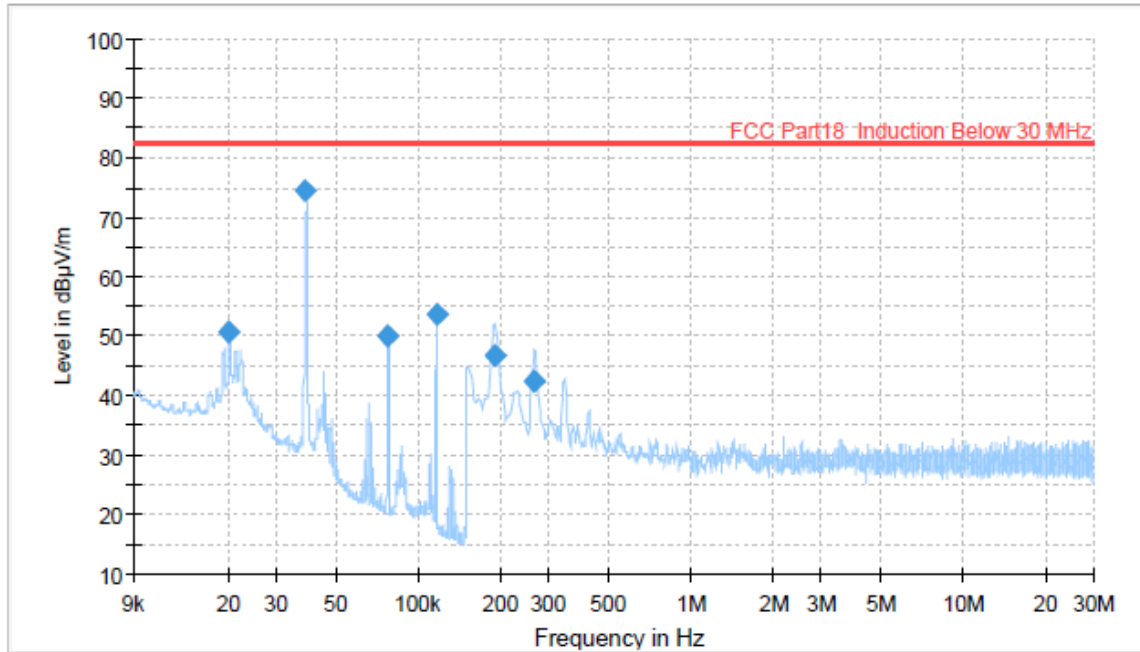


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020174	50.74	82.60	31.86	1000.0	0.200	H	169.0	20.3
0.038165	74.37	82.60	8.23	1000.0	0.200	H	102.0	20.1
0.077246	50.06	82.60	32.54	1000.0	0.200	H	140.0	20.0
0.115927	53.59	82.60	29.01	1000.0	0.200	H	102.0	20.0
0.191790	46.88	82.60	35.72	1000.0	9.000	H	132.0	20.0
0.266415	42.48	82.60	40.12	1000.0	9.000	H	79.0	20.0



Cooking Element #1_V

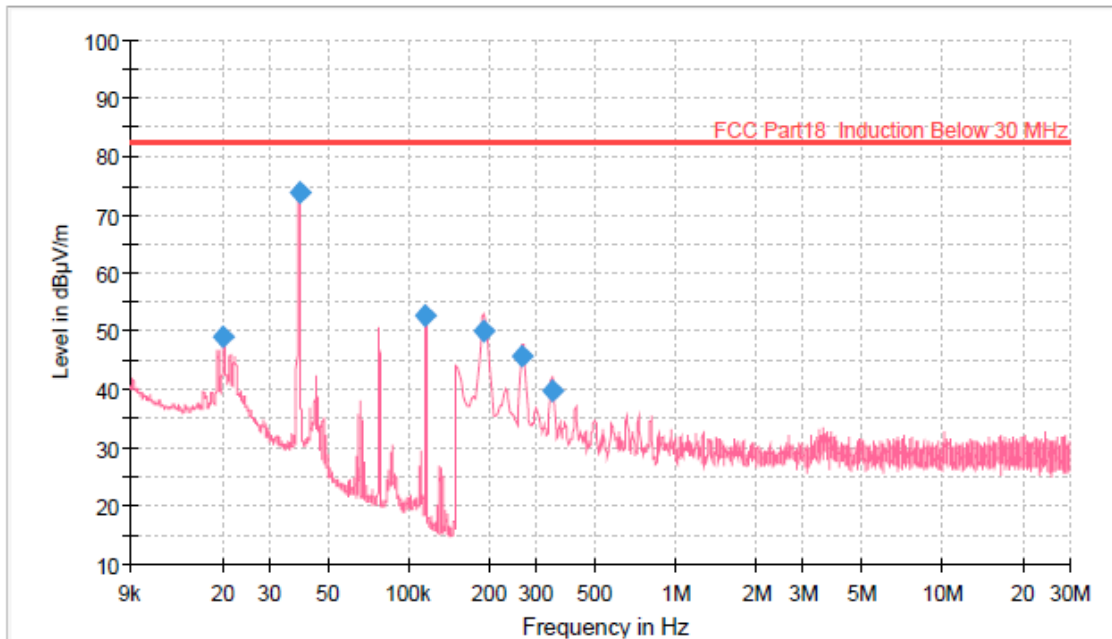


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	49.12	82.60	33.48	1000.0	0.200	V	79.0	20.3
0.038835	73.78	82.60	8.82	1000.0	0.200	V	179.0	20.1
0.115880	52.70	82.60	29.90	1000.0	0.200	V	0.0	20.0
0.190000	50.19	82.60	32.41	1000.0	9.000	V	15.0	20.0
0.265415	45.65	82.60	36.95	1000.0	9.000	V	0.0	20.0
0.344025	39.86	82.60	42.74	1000.0	9.000	V	335.0	20.0



Cooking Element #2_H

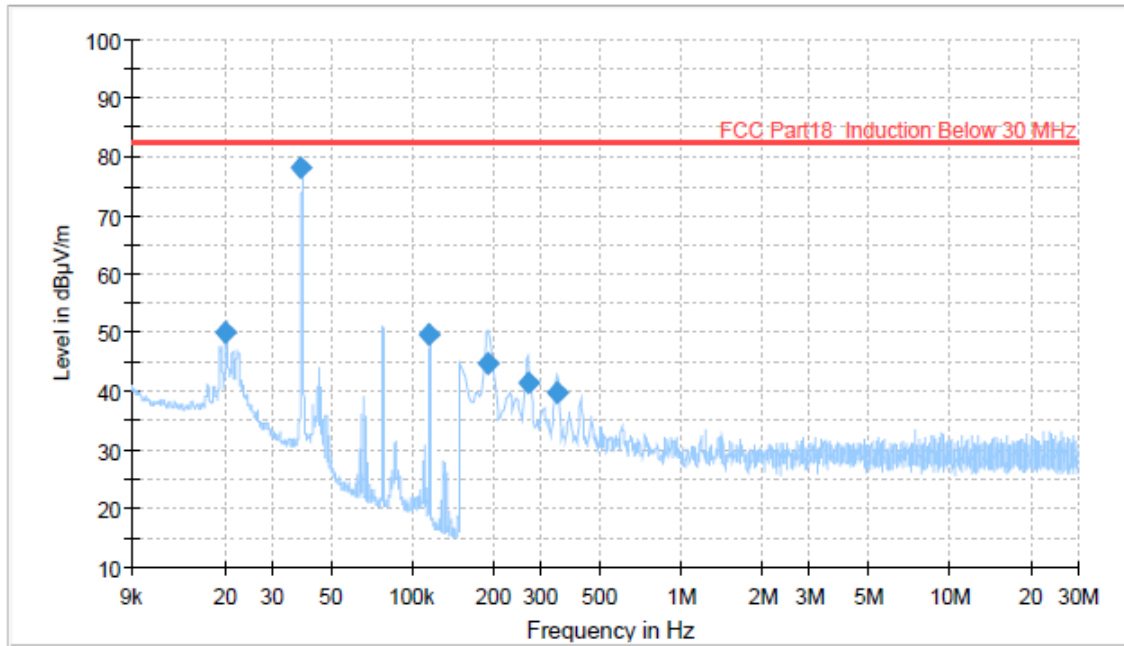


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020150	50.20	82.60	32.40	1000.0	0.200	H	148.0	20.3
0.038179	78.22	82.60	4.38	1000.0	0.200	H	80.0	20.1
0.115823	49.73	82.60	32.87	1000.0	0.200	H	80.0	20.0
0.191790	44.90	82.60	37.70	1000.0	9.000	H	90.0	20.0
0.268400	41.54	82.60	41.06	1000.0	9.000	H	76.0	20.0
0.347010	39.94	82.60	42.66	1000.0	9.000	H	90.0	20.0



Cooking Element #2_V

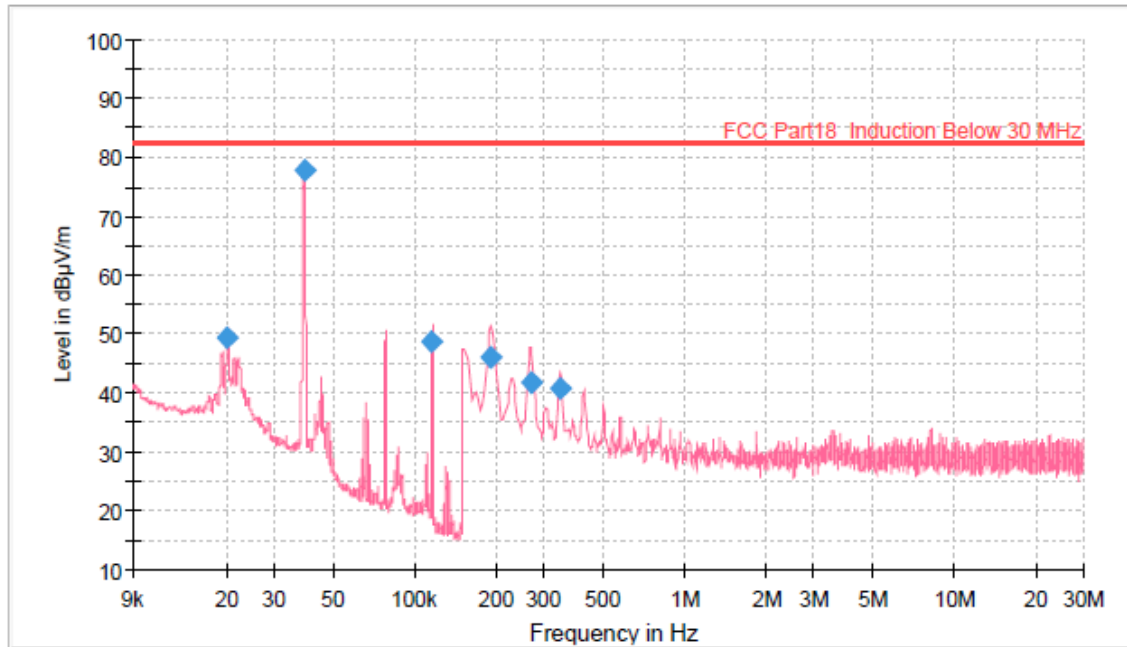


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020094	49.46	82.60	33.14	1000.0	0.200	V	66.0	20.3
0.039130	77.84	82.60	4.76	1000.0	0.200	V	162.0	20.1
0.115851	48.76	82.60	33.84	1000.0	0.200	V	146.0	20.0
0.190000	45.91	82.60	36.69	1000.0	9.000	V	121.0	20.0
0.268400	41.93	82.60	40.67	1000.0	9.000	V	117.0	20.0
0.344010	40.64	82.60	41.96	1000.0	9.000	V	178.0	20.0



Cooking Element #3_H

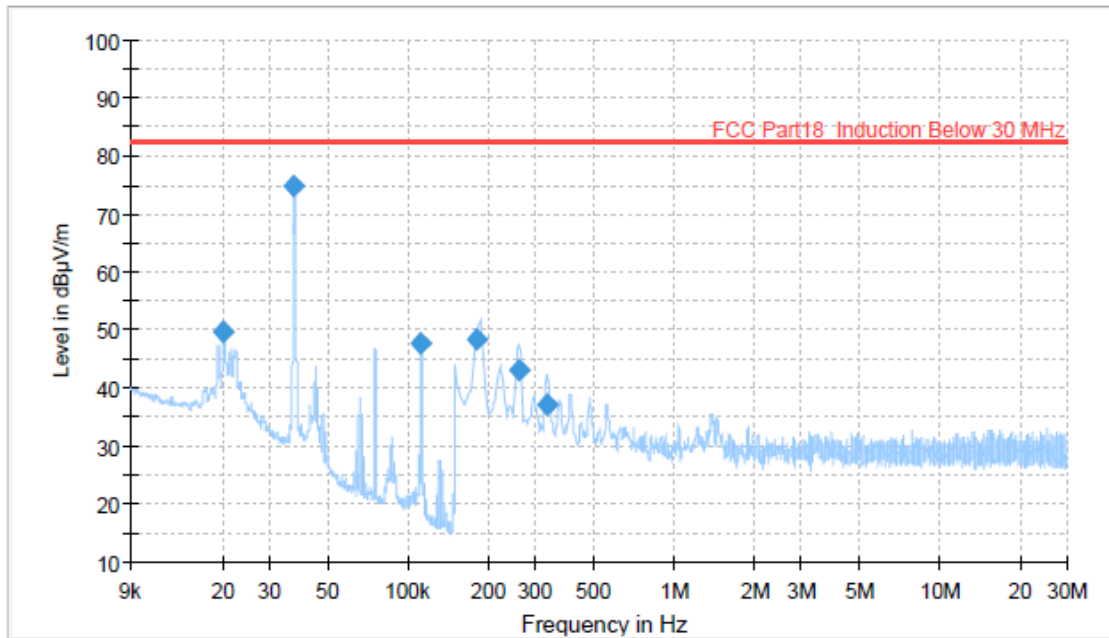


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020085	49.72	82.60	32.88	1000.0	0.200	H	32.0	20.3
0.037089	74.85	82.60	7.75	1000.0	0.200	H	110.0	20.1
0.111810	47.69	82.60	34.91	1000.0	0.200	H	219.0	20.0
0.182000	48.44	82.60	34.16	1000.0	9.000	H	79.0	20.0
0.260445	42.93	82.60	39.67	1000.0	9.000	H	214.0	20.0
0.332085	37.29	82.60	45.31	1000.0	9.000	H	92.0	20.0



Cooking Element #3_V

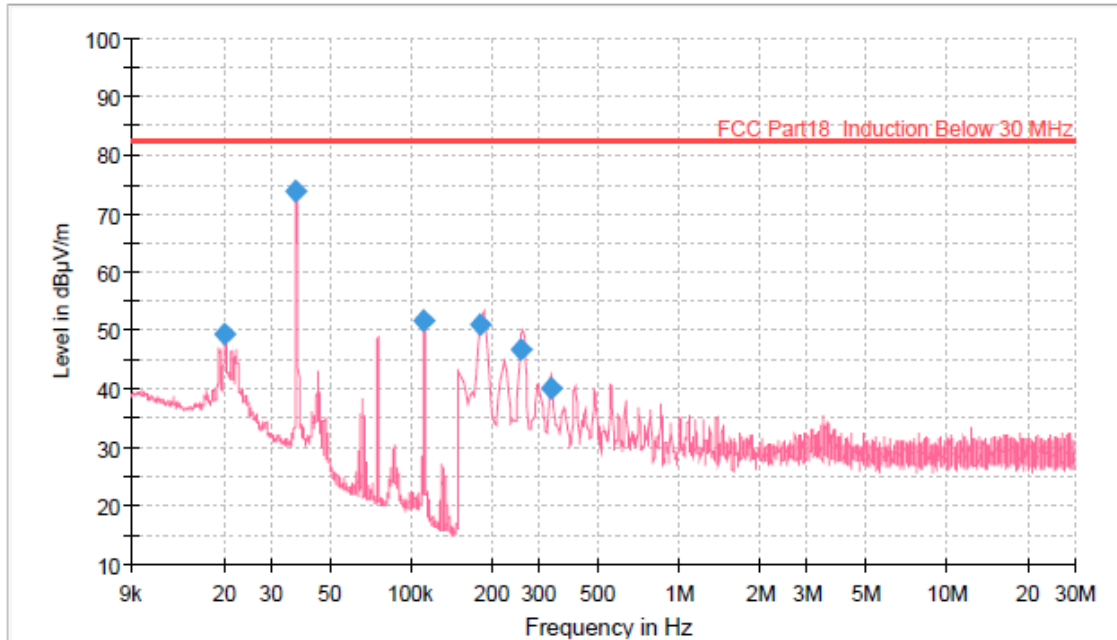


— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020160	49.36	82.60	33.24	1000.0	0.200	V	358.0	20.3
0.036708	73.99	82.60	8.61	1000.0	0.200	V	0.0	20.1
0.111758	51.75	82.60	30.85	1000.0	0.200	V	181.0	20.0
0.182000	50.91	82.60	31.69	1000.0	9.000	V	176.0	20.0
0.255445	46.60	82.60	36.00	1000.0	9.000	V	181.0	20.0
0.332085	40.21	82.60	42.39	1000.0	9.000	V	188.0	20.0



Cooking Element #4_H

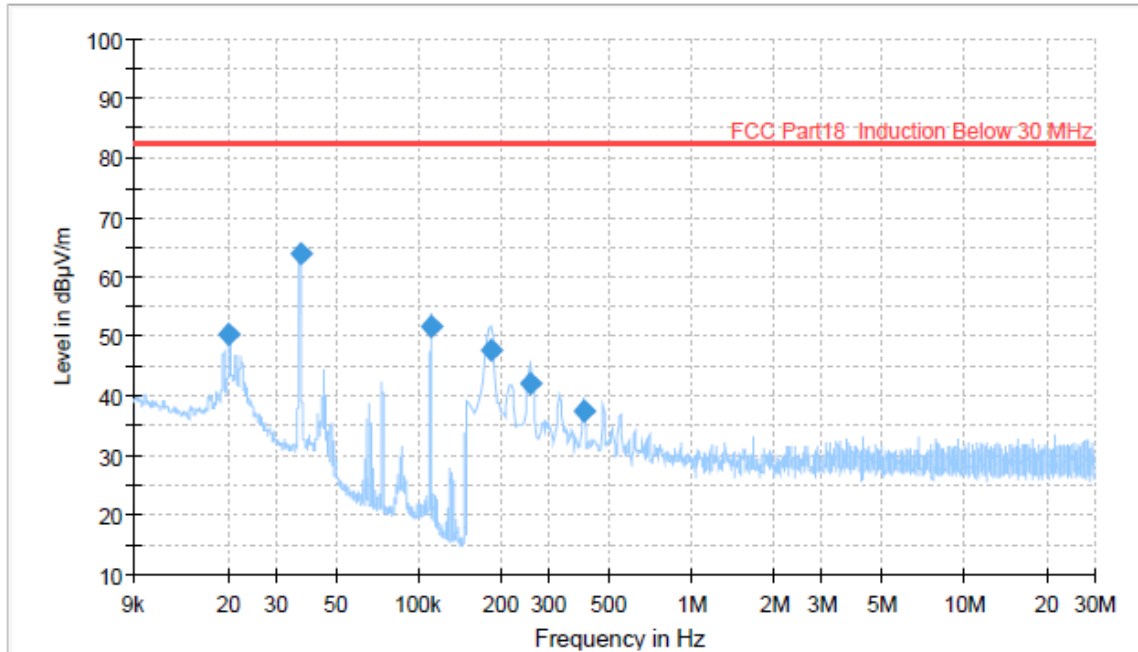


— Preview Result 1H-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	50.21	82.60	32.39	1000.0	0.200	H	174.0	20.3
0.036849	64.02	82.60	18.58	1000.0	0.200	H	356.0	20.1
0.110744	51.58	82.60	31.02	1000.0	0.200	H	195.0	20.0
0.182835	47.85	82.60	34.75	1000.0	9.000	H	199.0	20.0
0.254475	42.12	82.60	40.48	1000.0	9.000	H	179.0	20.0
0.403725	37.49	82.60	45.11	1000.0	9.000	H	179.0	20.0



Cooking Element #4_V

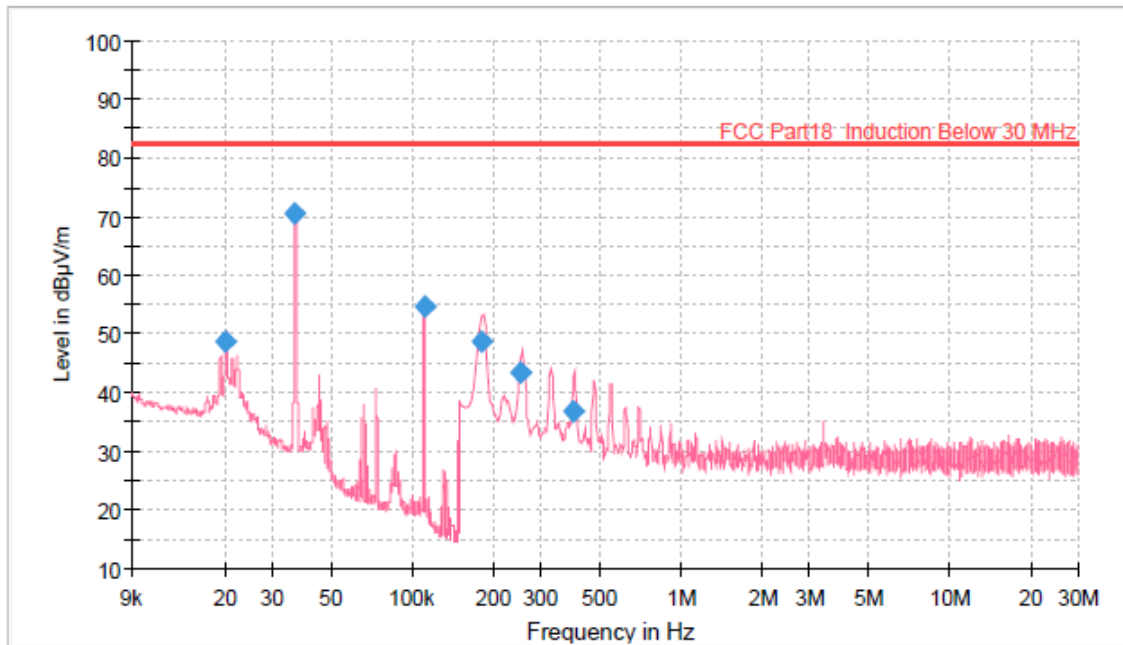

— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020136	48.70	82.60	33.90	1000.0	0.200	V	342.0	20.3
0.036158	70.59	82.60	12.01	1000.0	0.200	V	225.0	20.1
0.110758	54.70	82.60	27.90	1000.0	0.200	V	248.0	20.0
0.179850	48.65	82.60	33.95	1000.0	9.000	V	248.0	20.0
0.252460	43.27	82.60	39.33	1000.0	9.000	V	90.0	20.0
0.399740	36.87	82.60	45.73	1000.0	9.000	V	43.0	20.0



Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a Average detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength


Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 Cooking element

“1”= left front hob ,”2”= left rear hob, “3”= Center hob, “4”= right hob

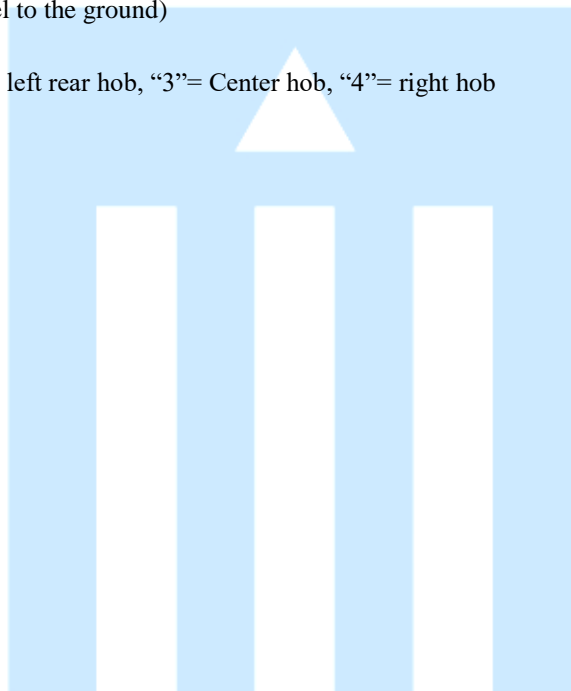



8. Sample Calculations

$$\text{dB}\mu\text{V} = 20 \text{ Log}_{10}(\mu\text{V}/\text{m})$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

8.1 Example 1 :


■ 20.3 MHz

Class B Limit = 250 μV = 48 $\text{dB}\mu\text{V}$

Reading = 39.2 $\text{dB}\mu\text{V}$

$10^{(39.2\text{dB}\mu\text{V}/20)}$ = 91.2 μV

Margin = 48 $\text{dB}\mu\text{V}$ - 39.2 $\text{dB}\mu\text{V}$
 = 8.8 dB

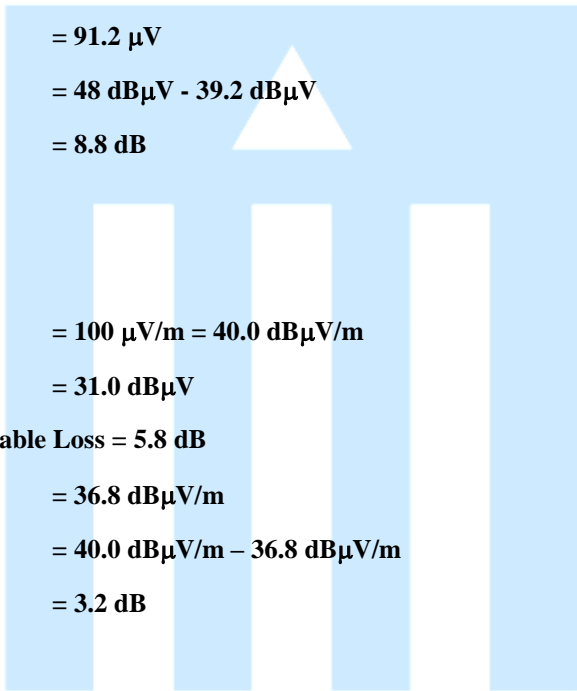

8.2 Example 2 :

■ 66.7 MHz

Class B Limit = 100 $\mu\text{V}/\text{m}$ = 40.0 $\text{dB}\mu\text{V}/\text{m}$

Reading = 31.0 $\text{dB}\mu\text{V}$

Antenna Factor + Cable Loss = 5.8 dB

Total = 36.8 $\text{dB}\mu\text{V}/\text{m}$

Margin = 40.0 $\text{dB}\mu\text{V}/\text{m}$ - 36.8 $\text{dB}\mu\text{V}/\text{m}$
 = 3.2 dB



9. Recommendation & Conclusion

The data collected shows that the **HOUSEHOLD COOKTOP (Model Name: SKSIT3001GE)** was complies with §18.305 and 18.307 of the FCC Rules.

- The end -

