

EVALUATION REPORT

for Certification of Conformity

FCC Part 18

Applicant: LG Electronics USA.

111 Sylvan Avenue,

Englewood Cliffs New Jersey United States 07632,

Attn: Sung Soo Kim / Director

Date of Issue: Aug 26, 2022

Order Number: GETEC-C1-22-565

Test Report Number: GETEC-E3-22-105

Test Site: GUMI UNIVERSITY EMC CENTER

CAB Designation Number: KR0033

FCC ID. : BEJS47413G

Applicant : LG Electronics USA.

Rule Part(s)	: FCC Part 18
Test Method	: FCC/OET MP-5
EUT Type	: ELECTRIC RANGE
Equipment Class	: Part 18 Consumer Device(8CC)
Type of Authority	: Certification
Model Name	: LSIS6338F
Trade Mark	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,



Sang Hyun Park, Senior Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,



Hyoung-Seop Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	6
4. DESCRIPTION OF TESTS.....	7
4.1 TEST CONDITION.....	7
5. SUMMARY OF TEST RESULTS	7
6. CONDUCTED EMISSION.....	8
6.1 OPERATING ENVIRONMENT	9
6.2 TEST SET-UP	9
6.3 MEASUREMENT UNCERTAINTY.....	9
6.4 LIMIT	10
6.5 TEST EQUIPMENT USED.....	10
6.6 TEST DATA FOR CONDUCTED EMISSION	10
7. RADIATED EMISSION	19
7.1 OPERATING ENVIRONMENT	19
7.2 TEST SET-UP	19
7.3 MEASUREMENT UNCERTAINTY.....	21
7.4 LIMIT	22
7.5 TEST EQUIPMENT USED.....	22
7.6 TEST DATA FOR RADIATED EMISSION.....	23
8. SAMPLE CALCULATIONS.....	27
8.1 EXAMPLE 1 :	27
8.2 EXAMPLE 2 :	27
9. RECOMMENDATION & CONCLUSION.....	27
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABEL LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA.

Applicant Address: 111 Sylvan Avenue,
Englewood Cliffs New Jersey United States 07632

Manufacturer: LG Electronics Inc..

Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 51533, Korea

Contact Person: Kwang-Mu, Son / Chief Research Engineer

Telephone Number: +82-55-260-3966

● FCC ID.	BEJS47413G
● EUT Type	ELECTRIC RANGE
● Model Name	LSIS6338F
● Rule Part(s)	FCC Part 18
● Test Method	FCC/OET MP-5
● Type of Authority	Certification
● Test Procedure(s)	FCC/OET MP-5
● Dates of Test	Aug 16, 2022 ~ Aug 17, 2022
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.
● Test Report Number	GETEC-E3-22-105
● Dates of Issue	Aug 26, 2022



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **LG Electronics USA.**

ELECTRIC RANGE (Model name: LSIS6338F).

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER.**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

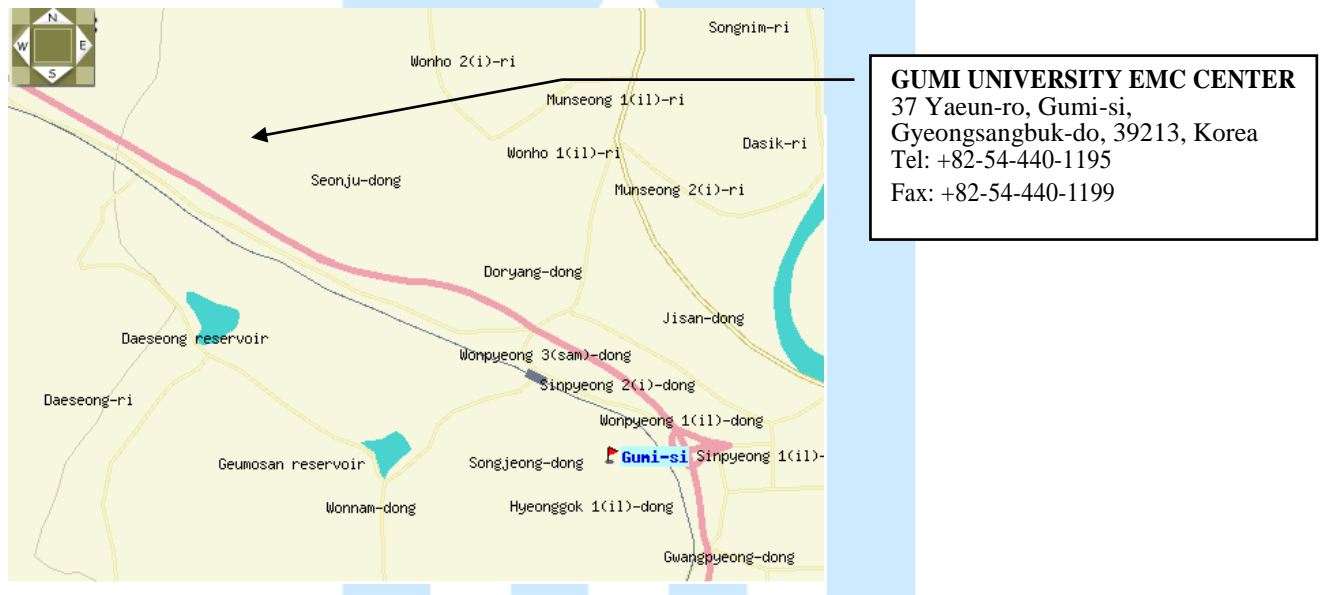


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics USA.**

ELECTRIC RANGE (Model Name: LSIS6338F)

FCC ID.: BEJS47413G.

Oven Range Models	LSIS6338
Description	Electric Slide In Oven Range
Electrical requirements	11.9 kW 120/240 VAC or 10.2 kW 120/208 VAC
Exterior Dimensions	29 7/8" (W) x 37 1/4" (H) x 26 7/8" (D) (D with door closed) 75.8 cm (W) x 94.6 cm (H) x 68.3 cm (D) (D with door closed)
Height to cooking surface	36" (91.3 cm)
Net weight	188.8 lb (85.65 kg)
Total capacity	6.3 cu. ft.

RF Module Specifications

Type	Frequency Range	Output Power (Max.)
Wi-Fi	2412 - 2462 MHz	< 30 dBm
Bluetooth	2402 - 2480 MHz	< 30 dBm

LSIS6338* induction cooktop output contacts:

Relay Identification	Ratings	Contact location
Left front Element	14.17 A, 240 V ac resistive, 100,000 cycles	EBR32635102 Board
Left rear Element	7.5 A, 240 V ac resistive, 100,000 cycles	EBR32635102 Board
Right front Element	17.5 A, 240 V ac resistive, 100,000 cycles	EBR32635102 Board
Radiant hob Element	0.5 A, 240 V ac resistive, 100,000 cycles	EBR32635102 Board
Middle rear Element	7.5 A, 240 V ac resistive, 100,000 cycles	EBR32635102 Board



3.2 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See “Appendix E – Test Setup Photographs” for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
WLAN module	LG Electronics	LCWB-001	S/N: -. FCC ID.: BEJ-LCWB001

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.40 m Unshielded.

3.3 Modification Item(s)

-. None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 208V / 240 V, 60 Hz
- Operating condition during the test(s) :
This device has been tested in the configurations of Induction mode with WLAN module operating.
Induction mode: This device has been operated (boost mode) with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

Cooking element “1”= left front hob ,”2”= left rear hob, “3”= middle rear hob, “4”= right front hob

Cooking vessels

“1”= 210 mm

“2”, “3”= 180 mm

“4”= 300 mm

4.2 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014).

5. Summary of Test Results

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Emission	Pass
§18.307	Conducted Emission	Pass



6. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.
(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

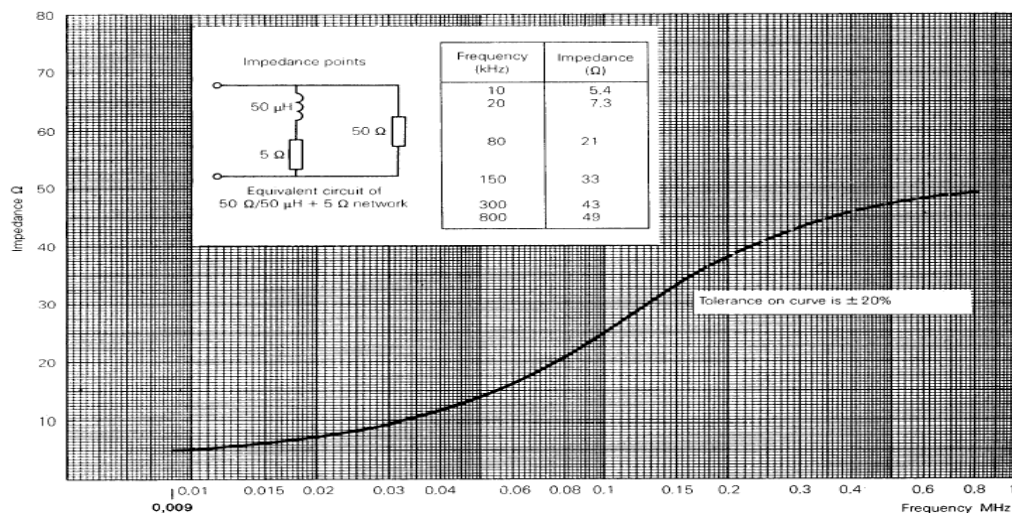


Fig 2. Impedance of LISN



6.1 Operating Environment

Temperature : 21.3 °C
Relative Humidity : 56.9 %
Air Pressure : 99.6 kPa

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.69 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



6.4 Limit

RFI Conducted	FCC Limit(dBμV/m)	
Freq. Range	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 05, 2022
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 05, 2022
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 05, 2022
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 06, 2022
■ - VTSD 9561-D	SCHWARZBECK	Pulse Limiter	32	Apr. 06, 2022
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A

6.6 Test data for Conducted Emission

- Test Date	: Aug 16, 2022
- Resolution Bandwidth	: 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range	: 9 kHz ~ 30 MHz
- Line	: L1: Live, N: Neutral
- Comment	: None



- Operating condition: Induction mode with WLAN
- AC 208 V / 60 Hz
Cooking element #1

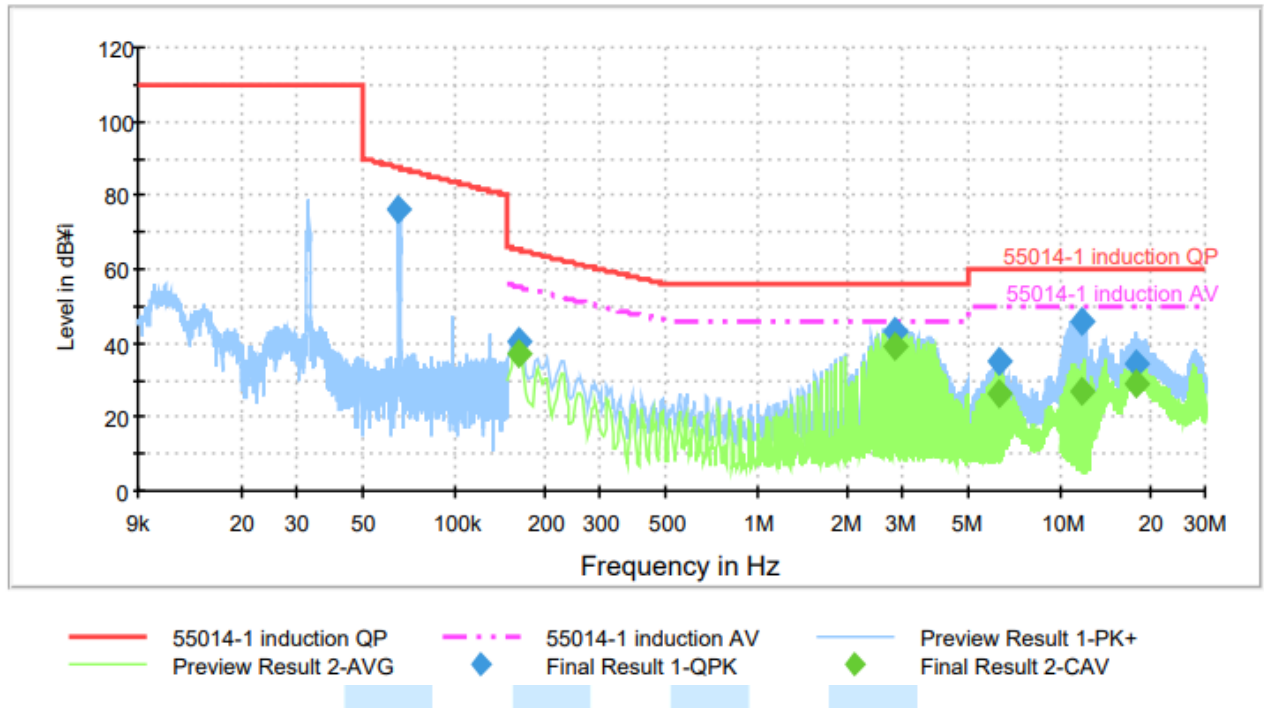

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.065052	76.0	1000.0	0.200	GND	L1	20.4	11.6	87.6	
0.162000	40.6	1000.0	9.000	GND	L1	20.4	24.7	65.3	
2.837994	43.0	1000.0	9.000	GND	N	20.6	13.0	56.0	
6.249906	34.8	1000.0	9.000	GND	N	20.7	25.2	60.0	
11.818244	45.9	1000.0	9.000	GND	L1	20.7	14.1	60.0	
17.873319	34.4	1000.0	9.000	GND	L1	20.8	25.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162000	37.2	1000.0	9.000	GND	L1	20.4	18.1	55.3	
2.837994	39.0	1000.0	9.000	GND	N	20.6	7.0	46.0	
6.249906	26.5	1000.0	9.000	GND	N	20.7	23.5	50.0	
11.818244	26.7	1000.0	9.000	GND	L1	20.7	23.3	50.0	
17.873319	29.2	1000.0	9.000	GND	L1	20.8	20.8	50.0	



Cooking element #2

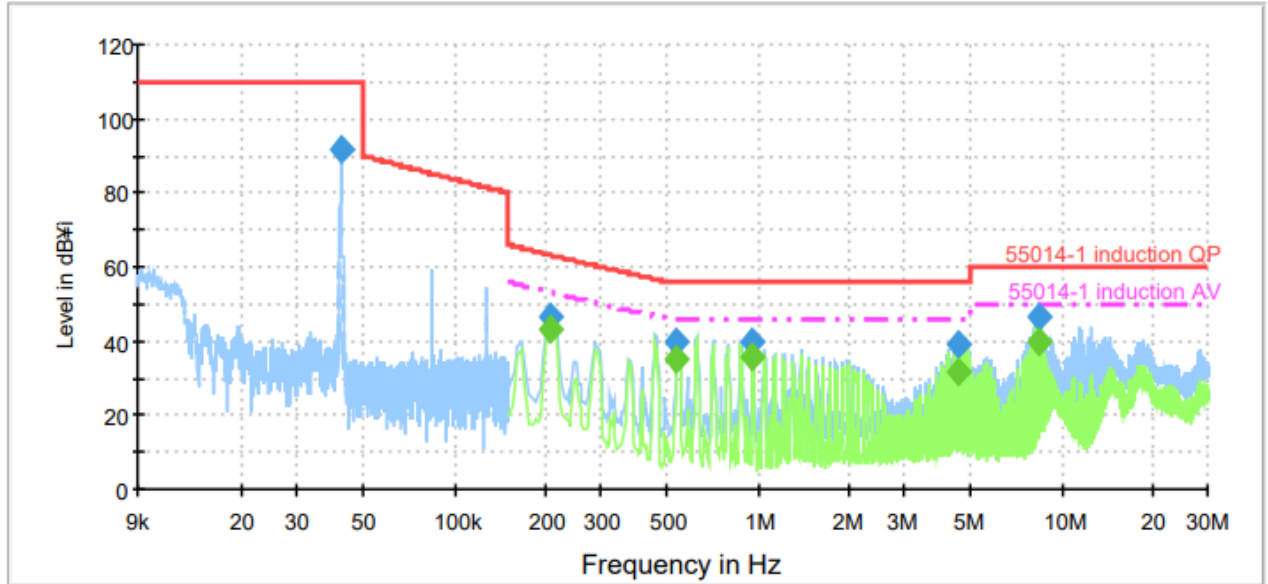

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.042117	91.5	1000.0	0.200	GND	N	20.5	18.5	110.0	
0.206000	46.4	1000.0	9.000	GND	N	20.5	16.8	63.2	
0.537963	40.1	1000.0	9.000	GND	N	20.5	15.9	56.0	
0.955863	39.6	1000.0	9.000	GND	L1	20.5	16.4	56.0	
4.564725	38.9	1000.0	9.000	GND	N	20.6	17.1	56.0	
8.378900	46.3	1000.0	9.000	GND	N	20.7	13.7	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.206000	43.1	1000.0	9.000	GND	N	20.5	10.1	53.2	
0.537963	35.0	1000.0	9.000	GND	N	20.5	11.0	46.0	
0.955863	35.8	1000.0	9.000	GND	L1	20.5	10.2	46.0	
4.564725	31.6	1000.0	9.000	GND	N	20.6	14.4	46.0	
8.378900	40.0	1000.0	9.000	GND	N	20.7	10.0	50.0	



Cooking element #3

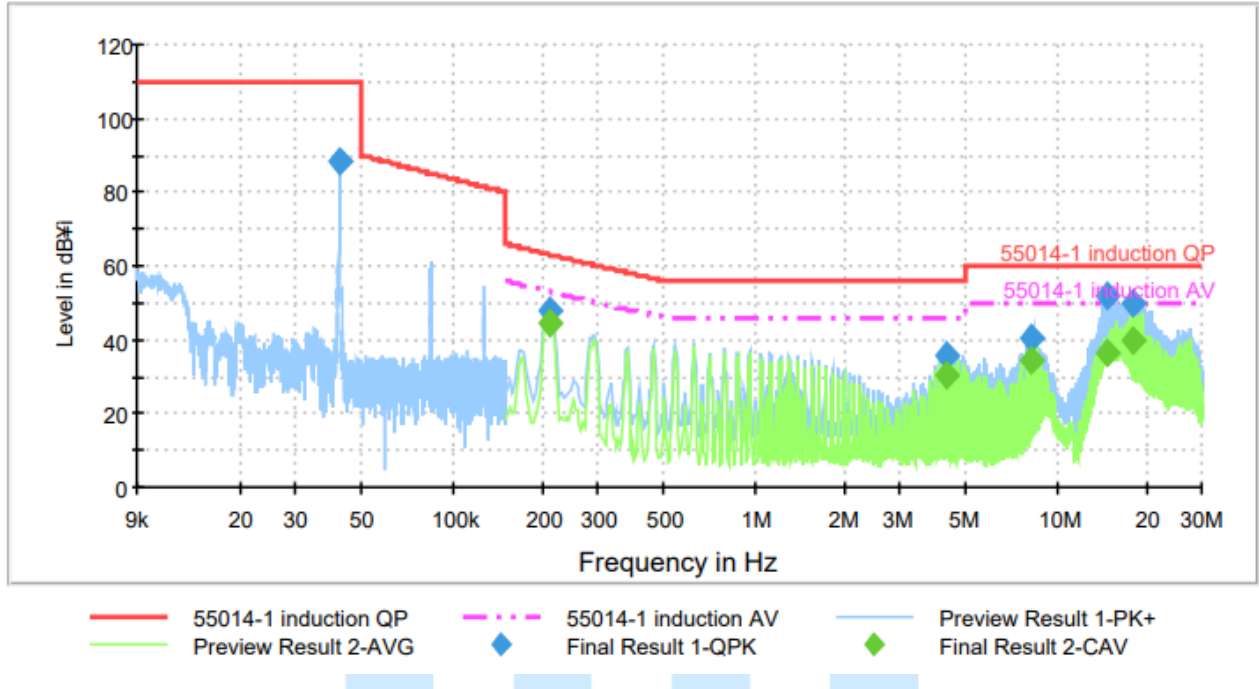

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.042223	88.5	1000.0	0.200	GND	N	20.4	21.5	110.0	
0.210000	47.7	1000.0	9.000	GND	L1	20.5	15.3	63.0	
4.311569	36.1	1000.0	9.000	GND	N	20.6	19.9	56.0	
8.219769	40.2	1000.0	9.000	GND	N	20.7	19.8	60.0	
14.555669	52.0	1000.0	9.000	GND	L1	20.8	8.0	60.0	
17.930600	49.6	1000.0	9.000	GND	L1	20.8	10.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.210000	44.3	1000.0	9.000	GND	L1	20.5	8.7	53.0	
4.311569	30.3	1000.0	9.000	GND	N	20.6	15.7	46.0	
8.219769	34.2	1000.0	9.000	GND	N	20.7	15.8	50.0	
14.555669	36.7	1000.0	9.000	GND	L1	20.8	13.3	50.0	
17.930600	39.8	1000.0	9.000	GND	L1	20.8	10.2	50.0	



Cooking element #4

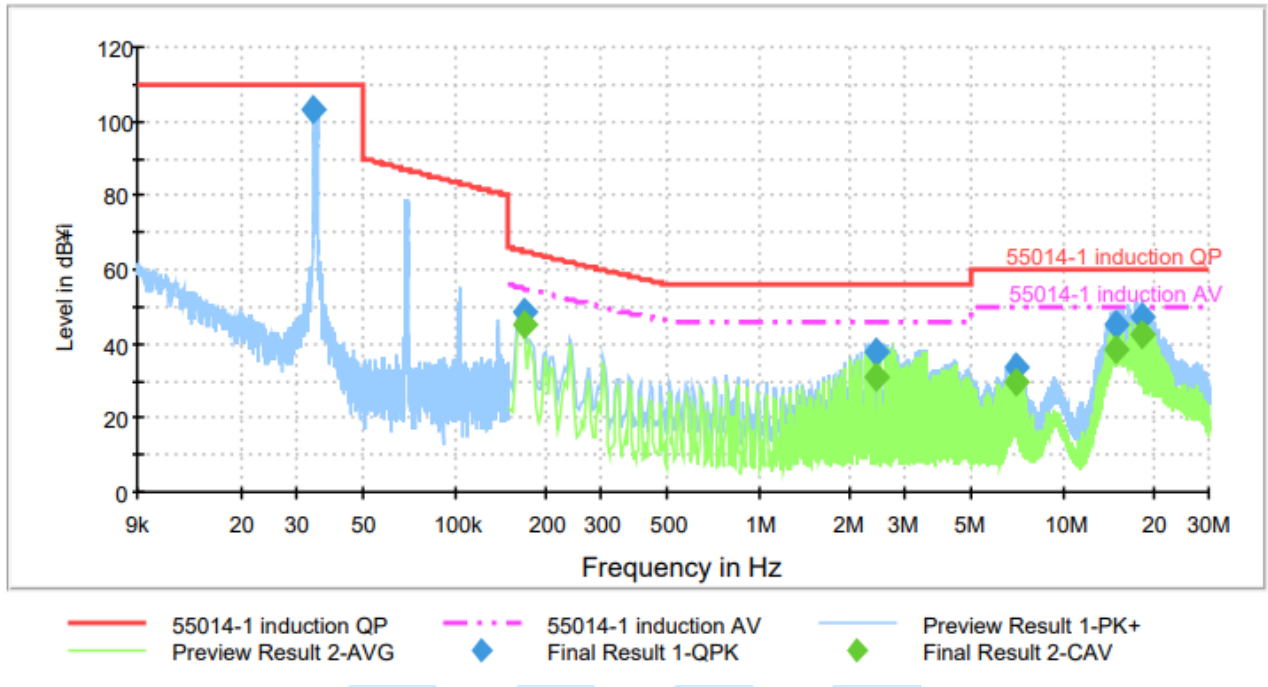

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.034120	103.1	1000.0	0.200	GND	L1	20.4	6.9	110.0	
0.170000	48.4	1000.0	9.000	GND	L1	20.4	16.5	64.9	
2.429913	37.6	1000.0	9.000	GND	L1	20.6	18.4	56.0	
6.989025	33.7	1000.0	9.000	GND	N	20.7	26.3	60.0	
14.966344	45.5	1000.0	9.000	GND	L1	20.8	14.5	60.0	
18.084894	47.4	1000.0	9.000	GND	L1	20.8	12.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.170000	45.2	1000.0	9.000	GND	L1	20.4	9.7	54.9	
2.429913	31.1	1000.0	9.000	GND	L1	20.6	14.9	46.0	
6.989025	29.5	1000.0	9.000	GND	N	20.7	20.5	50.0	
14.966344	38.5	1000.0	9.000	GND	L1	20.8	11.5	50.0	
18.084894	42.7	1000.0	9.000	GND	L1	20.8	7.3	50.0	



AC 240 V / 60 Hz
Cooking element #1

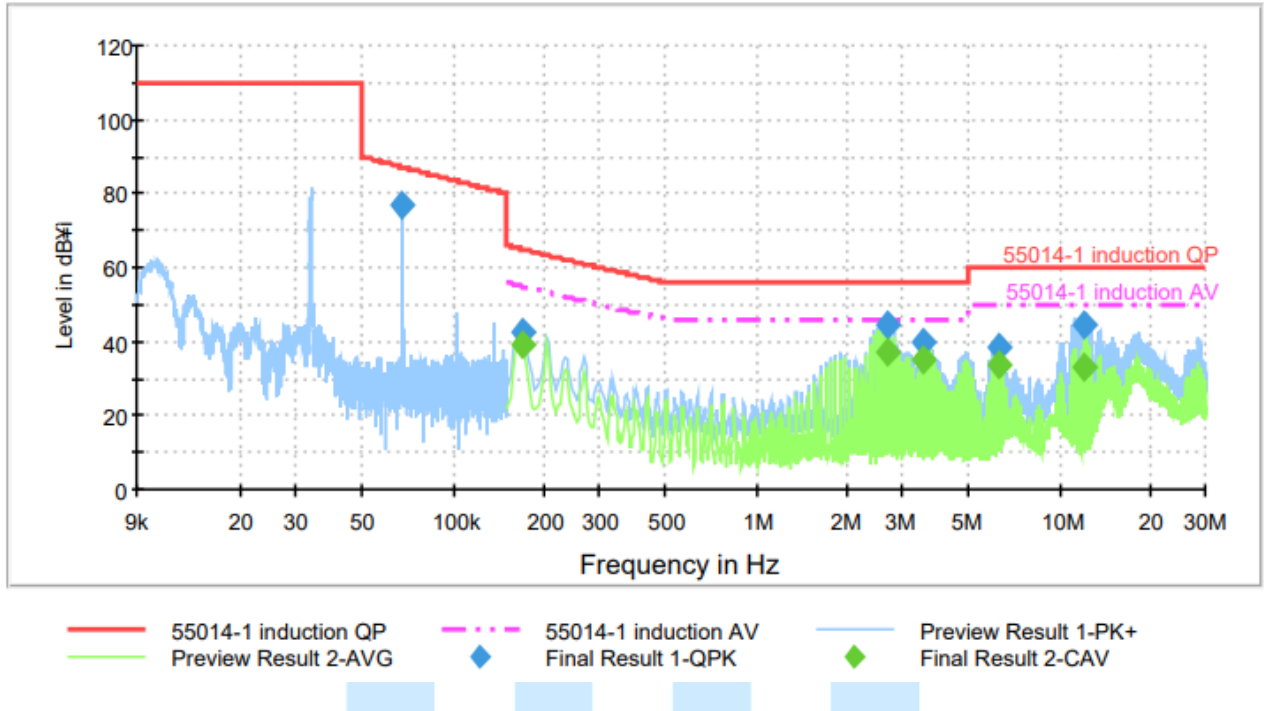

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.067726	76.8	1000.0	0.200	GND	L1	20.4	10.6	87.4	
0.170000	42.2	1000.0	9.000	GND	N	20.5	22.7	64.9	
2.713819	44.4	1000.0	9.000	GND	N	20.6	11.6	56.0	
3.525556	40.0	1000.0	9.000	GND	N	20.6	16.0	56.0	
6.220625	38.5	1000.0	9.000	GND	N	20.7	21.5	60.0	
12.089313	44.2	1000.0	9.000	GND	L1	20.7	15.8	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.170000	38.9	1000.0	9.000	GND	N	20.5	16.0	54.9	
2.713819	37.4	1000.0	9.000	GND	N	20.6	8.6	46.0	
3.525556	35.4	1000.0	9.000	GND	N	20.6	10.6	46.0	
6.220625	33.5	1000.0	9.000	GND	N	20.7	16.5	50.0	
12.089313	33.0	1000.0	9.000	GND	L1	20.7	17.0	50.0	



Cooking element #2

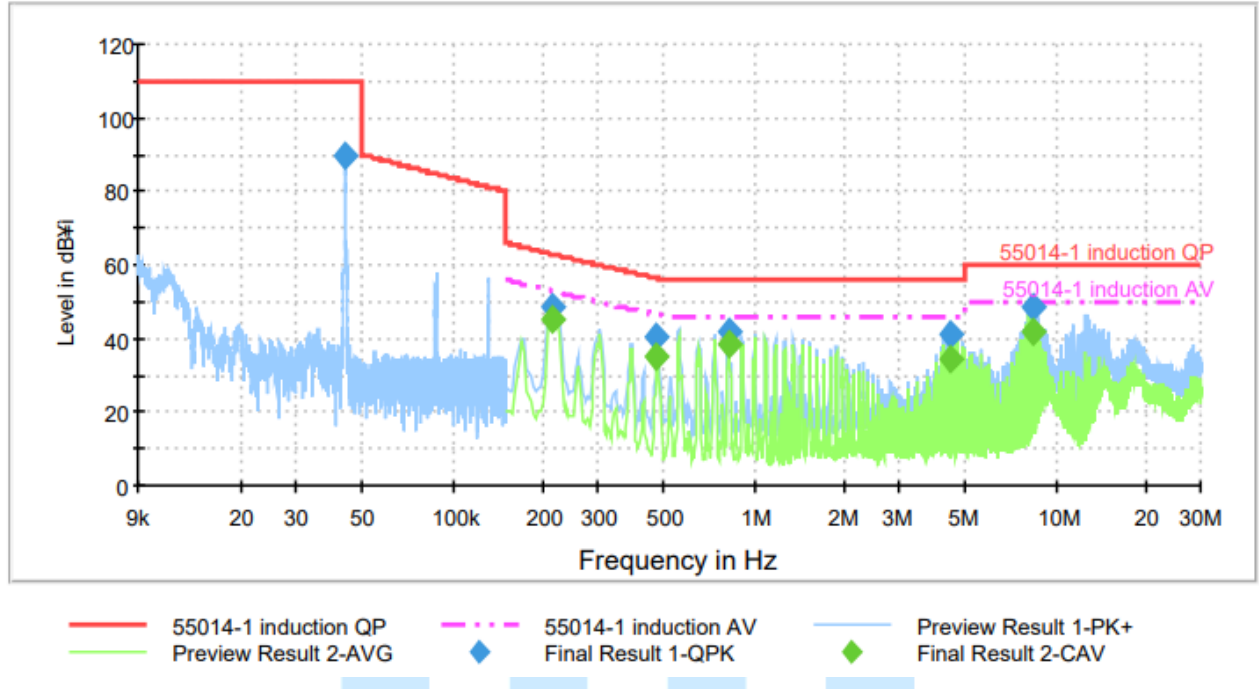

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.043792	89.5	1000.0	0.200	GND	N	20.5	20.5	110.0	
0.214000	48.6	1000.0	9.000	GND	N	20.5	14.3	62.9	
0.474169	40.5	1000.0	9.000	GND	N	20.5	15.9	56.4	
0.819625	41.9	1000.0	9.000	GND	N	20.5	14.1	56.0	
4.488013	41.2	1000.0	9.000	GND	N	20.6	14.8	56.0	
8.380450	48.4	1000.0	9.000	GND	N	20.7	11.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.214000	45.1	1000.0	9.000	GND	N	20.5	7.8	52.8	
0.474169	34.9	1000.0	9.000	GND	N	20.5	11.5	46.4	
0.819625	38.1	1000.0	9.000	GND	N	20.5	7.9	46.0	
4.488013	34.1	1000.0	9.000	GND	N	20.6	11.9	46.0	
8.380450	41.6	1000.0	9.000	GND	N	20.7	8.4	50.0	



Cooking element #3

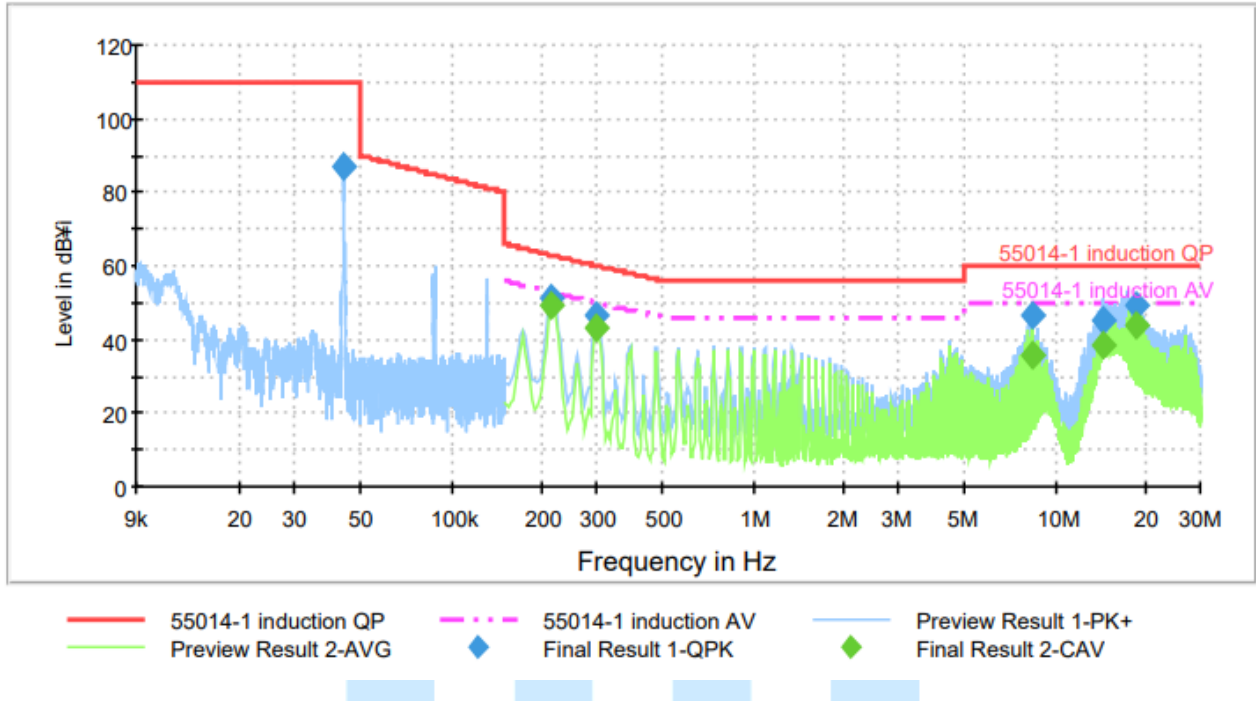

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.043774	87.1	1000.0	0.200	GND	N	20.5	22.9	110.0	
0.214000	51.4	1000.0	9.000	GND	N	20.5	11.5	62.9	
0.301551	46.2	1000.0	9.000	GND	N	20.5	13.8	60.0	
8.384181	46.3	1000.0	9.000	GND	N	20.7	13.7	60.0	
14.451763	45.5	1000.0	9.000	GND	L1	20.8	14.5	60.0	
18.441750	49.4	1000.0	9.000	GND	L1	20.8	10.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.214000	49.2	1000.0	9.000	GND	N	20.5	3.6	52.8	
0.301551	42.9	1000.0	9.000	GND	N	20.5	7.1	50.0	
8.384181	35.7	1000.0	9.000	GND	N	20.7	14.3	50.0	
14.451763	38.3	1000.0	9.000	GND	L1	20.8	11.7	50.0	
18.441750	43.9	1000.0	9.000	GND	L1	20.8	6.1	50.0	



Cooking element #4

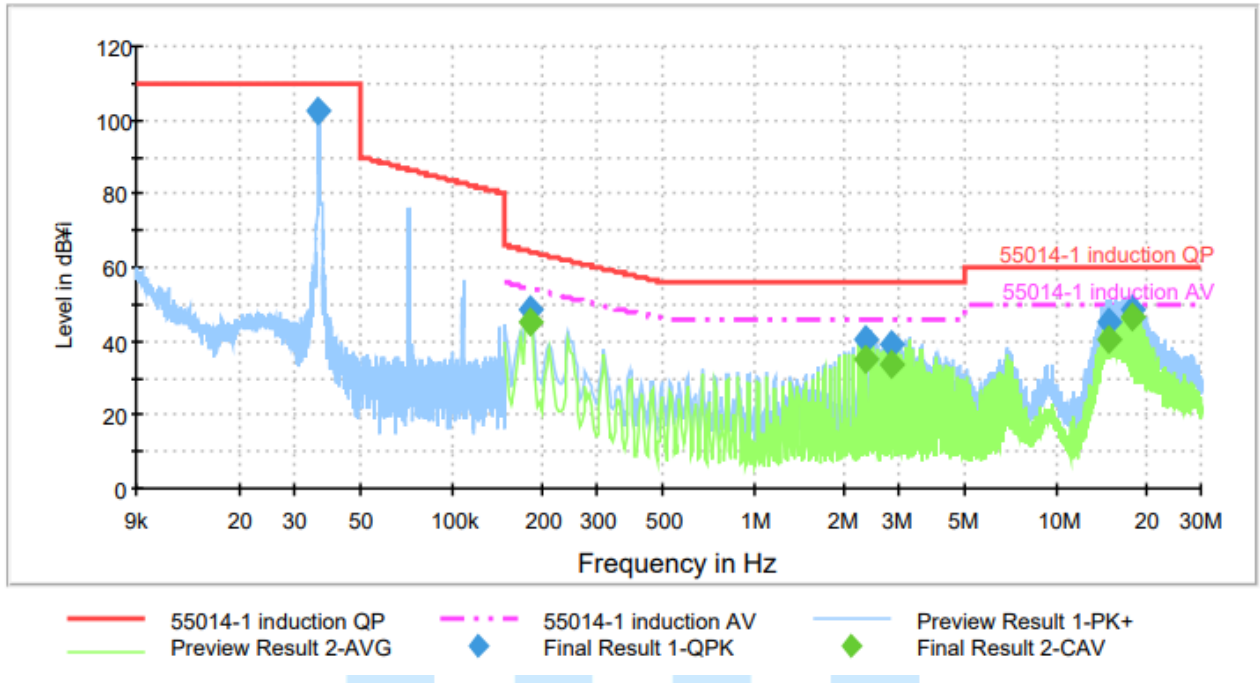

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.036037	102.4	1000.0	0.200	GND	N	20.5	7.6	110.0	
0.182000	48.5	1000.0	9.000	GND	L1	20.4	15.8	64.3	
2.328869	40.7	1000.0	9.000	GND	N	20.6	15.3	56.0	
2.834231	38.9	1000.0	9.000	GND	N	20.6	17.1	56.0	
14.977063	45.5	1000.0	9.000	GND	L1	20.8	14.5	60.0	
17.648875	48.8	1000.0	9.000	GND	L1	20.8	11.2	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.182000	45.2	1000.0	9.000	GND	L1	20.4	9.1	54.3	
2.328869	34.8	1000.0	9.000	GND	N	20.6	11.2	46.0	
2.834231	33.7	1000.0	9.000	GND	N	20.6	12.3	46.0	
14.977063	40.2	1000.0	9.000	GND	L1	20.8	9.8	50.0	
17.648875	46.3	1000.0	9.000	GND	L1	20.8	3.7	50.0	



7. Radiated Emission

7.1 Operating Environment

Temperature : 22.1 °C
Relative Humidity : 52.9 %
Air Pressure : 99.9 kPa

7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16 / ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

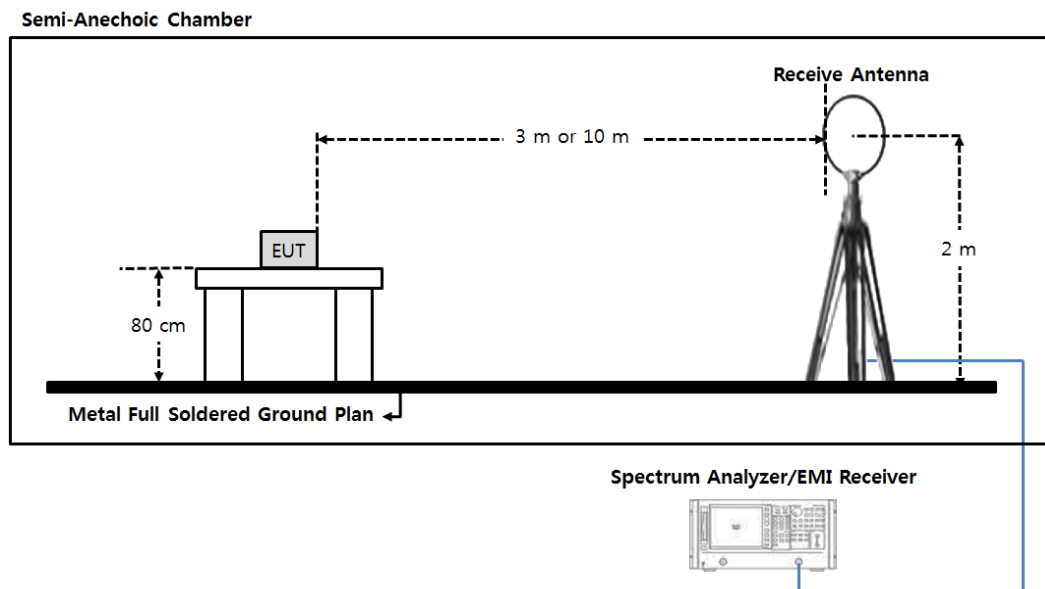


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

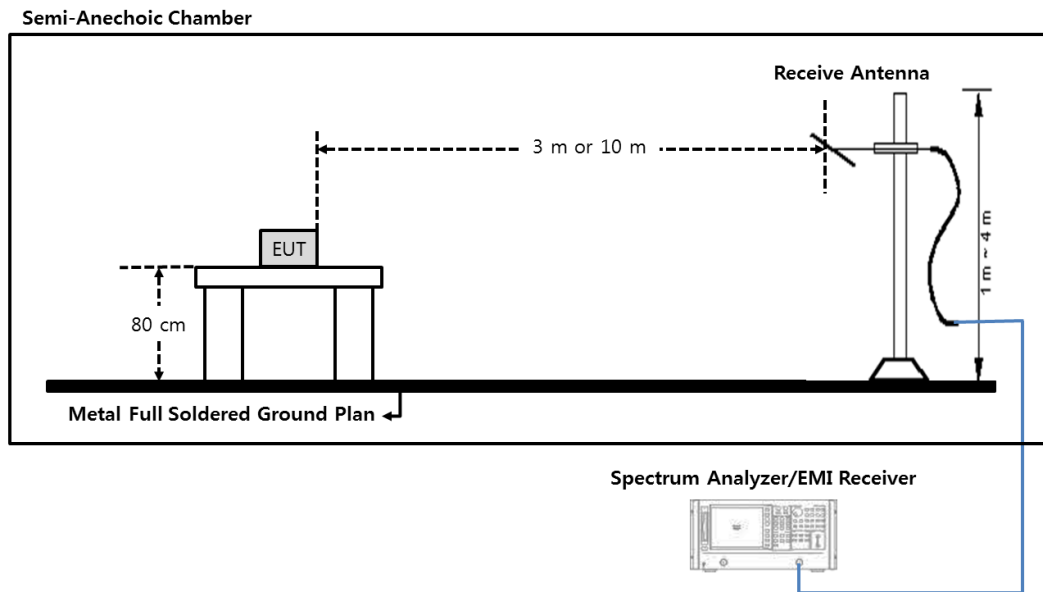


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)



7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.64 dB	Confidence level of approximately 95 % ($k = 2$)
Test items (3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.78 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.20 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.12 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 GHz ~ 6 GHz, 3 m)	4.56 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 GHz ~ 18 GHz, 3 m)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 GHz ~ 26 GHz, 3 m)	5.04 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (2)	1,600 (2)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/\text{F}(\text{kHz})$ $2,400/\text{F}(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/\text{F}(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴ 30 ⁴ 30

Note.

- 1) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 06, 2022
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Apr. 15, 2022
■ - CO3000	Innco system GmbH	Position Controller	CO3000/779/330 50314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
□ - EMC 32	Rohde & Schwarz	Software	Ver.10.40.10	N/A

All test equipment used is calibrated on a regular basis.



7.6 Test data for Radiated Emission

- Test Date : Aug 17, 2022
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

-. Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz

-. Measurement Data: Induction mode with WLAN [208V , 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.22	19.08	36.14	82.6	63.52	27.38
F	0.032	Average	H	72.57	19.08	53.49			10.03
S	0.078	Average	V	48.41	19.08	29.33			34.19
S	0.099	Average	H	49.21	19.08	30.13			33.39
S	0.172	Average	V	43.93	19.08	24.85			38.67
S	0.301	Average	V	39.59	19.08	20.51			43.01

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 M	30 m	
S	0.015	Average	V	55.24	19.08	36.16	82.6	63.52	27.36
F	0.042	Average	H	78.22	19.08	59.14			4.38
S	0.078	Average	V	48.38	19.08	29.30			34.22
S	0.126	Average	H	57.44	19.08	38.36			25.16
S	0.215	Average	V	49.94	19.08	30.86			32.66
S	0.301	Average	V	44.66	19.08	25.58			37.94



Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.34	19.08	36.26	82.6	63.52	27.26
F	0.041	Average	H	71.88	19.08	52.80			10.72
S	0.078	Average	V	48.41	19.08	29.33			34.19
S	0.124	Average	H	54.27	19.08	35.19			28.33
S	0.172	Average	V	43.94	19.08	24.86			38.66
S	0.301	Average	V	42.45	19.08	23.37			40.15

Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.27	19.08	36.19	82.6	63.52	27.33
F	0.034	Average	H	75.07	19.08	55.99			7.53
S	0.078	Average	V	48.43	19.08	29.35			34.17
S	0.110	Average	V	47.53	19.08	28.45			35.07
S	0.172	Average	V	44.35	19.08	25.27			38.25
S	0.258	Average	V	42.62	19.08	23.54			39.98



[240V , 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.51	19.08	36.43	82.6	63.52	27.09
F	0.034	Average	V	72.34	19.08	53.26			10.26
S	0.078	Average	V	48.42	19.08	29.34			34.18
S	0.101	Average	H	49.88	19.08	30.80			32.72
S	0.172	Average	V	43.99	19.08	24.91			38.61
S	0.258	Average	V	43.58	19.08	24.50			39.02

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.29	19.08	36.21	82.6	63.52	27.31
F	0.043	Average	H	78.35	19.08	59.27			4.25
S	0.078	Average	V	48.44	19.08	29.36			34.16
S	0.130	Average	H	55.89	19.08	36.81			26.71
S	0.215	Average	V	46.65	19.08	27.57			35.95
S	0.301	Average	V	41.72	19.08	22.64			40.88

Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.46	19.08	36.38	82.6	63.52	27.14
F	0.043	Average	V	68.43	19.08	49.35			14.17
S	0.078	Average	V	48.42	19.08	29.34			34.18
S	0.130	Average	H	51.10	19.08	32.02			31.50
S	0.215	Average	V	45.70	19.08	26.62			36.90
S	0.301	Average	V	41.04	19.08	21.96			41.56



Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.015	Average	V	55.33	19.08	36.25	82.6	63.52	27.27
F	0.036	Average	H	74.57	19.08	55.49			8.03
S	0.078	Average	V	48.45	19.08	29.37			34.15
S	0.110	Average	V	47.43	19.08	28.35			35.17
S	0.172	Average	V	43.24	19.08	24.16			39.36
S	0.258	Average	V	42.81	19.08	23.73			39.79

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a Average detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength

Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 cooking element “1”= left front hob ,”2”= left rear hob, “3”= middle rear hob, “4”= right front hob



8. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

8.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

8.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB

9. Recommendation & Conclusion

The data collected shows that the **LG Electronics USA. ELECTRIC RANGE** (Model Name: **LSIS6338F**) was complies with §18.305 and 18.307 of the FCC Rules.

- The end -