

SAR TEST REPORT

Equipment Under Test	:	Cellular/PCS GSM/EDGE & WCDMA with Bluetooth and WLAN
Model No.	:	LG-T325g (Additional model name : T325g)
Applicant	:	LG Electronics Inc.
Address of Applicant	:	60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea
FCC ID	:	BEJT325G
Device Category	:	Portable Device
Exposure Category	:	General Population/Uncontrolled Exposure
Date of Receipt	:	2010-11-02
Date of Test(s)	:	2010-11-10 ~ 2010-12-01
Date of Issue	:	2010-12-02
Max. SAR	:	0.745 W/kg (GSM850), 0.787 W/kg (PCS1900), 0.493 W/kg (WCDMA V), 1.15 W/kg (WCDMA II), 0.311 W/kg (WLAN)

Standards:



FCC OET Bulletin 65 supplement C
IEEE 1528, 2003
ANSI/IEEE C95.1, C95.3

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Testing Korea Co., Ltd. or testing done by SGS Testing Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Testing Korea Co., Ltd. in writing.

Tested by	:	Fred Jeong		2010-12-02
Approved by	:	Charles Kim		2010-12-02

Contents

1. General Information

1.1	Testing Laboratory.....	3
1.2	Details of Applicant.....	3
1.3	Version of Report.....	3
1.4	Description of EUT(s).....	3
1.5	Test Environment.....	4
1.6	Operation description.....	4
1.7	Evaluation procedures.....	5
1.8	The SAR Measurement System.....	6
1.9	System Components.....	8
1.10	SAR System Verification.....	9
1.11	Tissue Simulant Fluid for the Frequency Band.....	11
1.12	Test Standards and Limits.....	12
2.	Instruments List.....	14
3.	Summary of Results.....	15

APPENDIX

- A. DASY4 SAR Report
- B. Uncertainty Analysis
- C. Calibration certificate

1. General Information

1.1 Testing Laboratory

SGS Testing Korea Co., Ltd.
 Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040
 Telephone : +82 +31 428 5700
 FAX : +82 +31 427 2371
 Homepage : www.kr.sgs.com/ee

1.2 Details of Manufacturer

Manufacturer : LG Electronics Inc.
 Address : 60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea
 Contact Person : Hyeon Kyun Kim
 Phone No. : 82-2-2033-1113

1.3 Version of Report

Version Number	Date	Revision
00	2010-11-22	Initial issue
01	2010-12-02	Revision 01

1.4 Description of EUT(s)

EUT Type	: Cellular/PCS GSM/EDGE & WCDMA with Bluetooth & WLAN
Model	: LG-T325g (Additional model name : T325g)
Serial Number	: 001KPTM845121
Mode of Operation	: GSM850, PCS1900, WCDMA V, WCDMA II, WLAN, Bluetooth
Duty Cycle	: 8(GSM), 8(GPRS 1Tx Slot), 1(WCDMA), 1(WLAN)
Body worn Accessory	: None
Tx Frequency Range	: 824.2 MHz ~ 848.8 MHz (GSM850) 1850.2 MHz ~ 1909.8 MHz (PCS1900) 826.4 MHz ~ 846.6 MHz (WCDMA V) 1852.4 MHz ~ 1907.6 MHz (WCDMA II) 2412 MHz ~ 2462 MHz (WLAN) 2402 MHz ~ 2480 MHz (Bluetooth)
Conducted Max Power	: 32.67 dBm(GSM850), 29.31 dBm(PCS1900), 22.98 dBm(WCDMA V), 23.34 dBm(WCDMA II) 14.57 dBm(WLAN), -0.64 dBm(Bluetooth)
Battery Type	: 3.7 V d.c. (Lithium-ion Battery)

1.5 Test Environment

Ambient temperature	: (22 ± 2) ° C
Tissue Simulating Liquid	: (22 ± 2) ° C
Relative Humidity	: (55 ± 5) % R.H.

1.6 Operation Configuration

The device in GSM and WCDMA mode was controlled by using a Communication tester (CMU 200). Communication between the device and the tester was established by air link. And the client provided a special driver and test program which can control the frequency and power of the WLAN module. Measurements were performed at the lowest, middle and highest channels of the operating band. The EUT was set to maximum power level during all tests and at the beginning of each test the battery was fully charged.

The DASY4 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. Based on the RF Power and antenna separation distance, stand-alone BT SAR and simultaneous SAR evaluation are not required.

1.7 EVALUATION PROCEDURES

- Power Reference Measurement Procedures

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 2.7 mm for an ET3DV6 probe type).

- The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 mm to 2.7 mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with

relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1 g and 10 g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30 g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1 g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.8 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1782 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant. The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

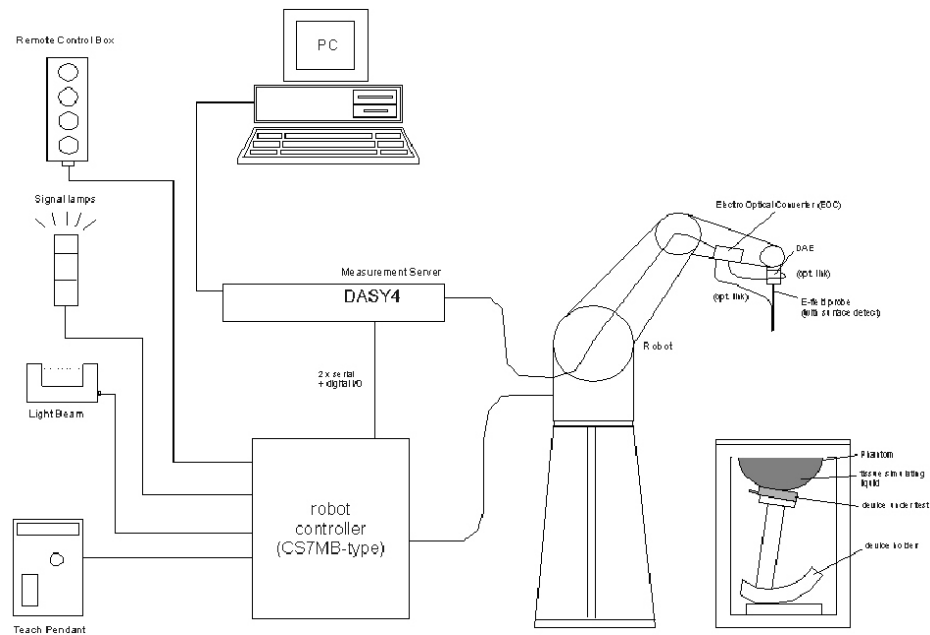



Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing body usage.
- The device holder for flat phantom.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

1.9 System Components

ET3DV6 E-Field Probe

Construction	: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol).
Calibration	: In air from 10 MHz to 2.5 GHz In brain simulating tissue (accuracy $\pm 8\%$)
Frequency	: 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	: ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range	: $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$; Linearity: ± 0.2 dB
Srfce. Detect	: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	: General dosimetry up to 3 GHz Compliance tests of mobile phone

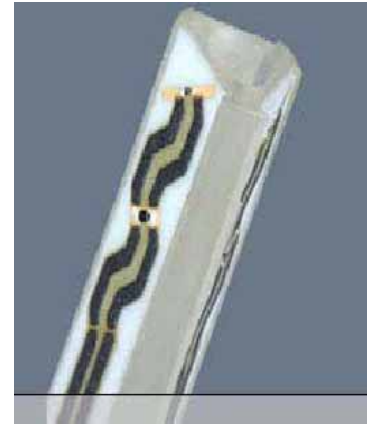

ET3DV6 E-Field Probe

NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.

SAM Phantom

Construction: The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90 % of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot



SAM Phantom

Shell Thickness: 2.0 mm \pm 0.1 mm

Filling Volume: Approx. 25 liters

DEVICE HOLDER

Construction In combination with the Twin SAM PhantomV4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

1.10 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within \pm 10 % from the target SAR values. These tests were done at 835 MHz, 1900 MHz and 2450 MHz. The tests for EUT were conducted within 24 hours after each validation. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2)^\circ \text{C}$, the relative humidity was in the range $(55 \pm 5) \% \text{R.H.}$ and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

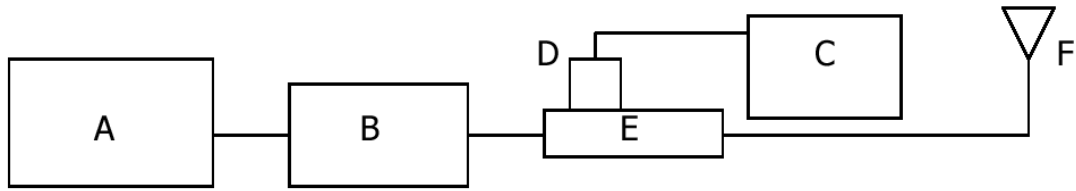


Fig b. The microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4421B Signal Generator
- B. EMPOWER Model 2057-BBS3Q5KCK Amplifier
- C. Agilent Model E4419B Power Meter
- D. Agilent Model 9300H Power Sensor
- E. Agilent Model 777D/778D Dual directional coupling
- F. Reference dipole Antenna



Photo of the dipole Antenna

System Validation Results

Validation Kit	Tissue	Target SAR 1 g from Calibration Certificate (1 W)	Measured SAR 1 g (1 W)	Deviation (%)	Date	Liquid Temp. (°C)
D835V2 S/N: 490	835 MHz Brain	9.62 W/kg	10.04 W/kg	4.37	2010-11-10	22.1
D835V2 S/N: 490	835 MHz Brain	9.62 W/kg	9.76 W/kg	1.46	2010-12-01	21.9
D1900V2 S/N: 5d033	1900 MHz Brain	39.4 W/kg	40.8 W/kg	3.55	2010-11-11	22.0
D1900V2 S/N: 5d033	1900 MHz Brain	39.4 W/kg	40.8 W/kg	3.55	2010-12-01	21.9
D2450V2 S/N: 734	2450 MHz Brain	51.7 W/kg	51.6 W/kg	-0.19	2010-11-15	22.3
D2450V2 S/N: 734	2450 MHz Body	53.5 W/kg	52.0 W/kg	-2.80	2010-11-15	22.3

Table 1. Results system validation

1.11 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Agilent Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5070B Network Analyzer(300 KHz - 3 GHz) by using a procedure detailed in Section V.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp()
835	Head	Measured, 2010-11-10	41.8	0.88	22.1
		Recommended Limits	41.5	0.90	21.0 ~ 23.0
		Deviation(%)	0.72	-2.22	-
	Body	Measured, 2010-11-10	54.7	0.94	22.1
		Recommended Limits	55.2	0.97	21.0 ~ 23.0
		Deviation(%)	-0.91	-3.09	-
835	Head	Measured, 2010-12-01	42.7	0.89	21.9
		Recommended Limits	41.5	0.90	21.0 ~ 23.0
		Deviation(%)	2.89	-1.11	-
	Body	Measured, 2010-12-01	54.5	0.94	21.9
		Recommended Limits	55.2	0.97	21.0 ~ 23.0
		Deviation(%)	-1.27	-3.09	-
1900	Head	Measured, 2010-11-11	38.4	1.45	22.0
		Recommended Limits	40.0	1.40	21.0 ~ 23.0
		Deviation(%)	-4.00	3.57	-
	Body	Measured, 2010-11-11	51.1	1.57	22.0
		Recommended Limits	53.3	1.52	21.0 ~ 23.0
		Deviation(%)	-4.13	3.29	-
1900	Head	Measured, 2010-12-01	38.4	1.46	21.9
		Recommended Limits	40.0	1.40	21.0 ~ 23.0
		Deviation(%)	-4.00	4.29	-
	Body	Measured, 2010-12-01	51.3	1.57	21.9
		Recommended Limits	53.3	1.52	21.0 ~ 23.0
		Deviation(%)	-3.75	3.29	-
2450	Head	Measured, 2010-11-15	38.3	1.84	22.3
		Recommended Limits	39.2	1.80	21.0 ~ 23.0
		Deviation(%)	-2.30	2.22	-
	Body	Measured, 2010-11-15	51.3	2.02	22.3
		Recommended Limits	52.7	1.95	21.0 ~ 23.0
		Deviation(%)	-2.66	3.59	-

The composition of the brain tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99 +% Pure Sodium Chloride

Sugar: 98 +% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99 +% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (“SAR”) in Section 4.2 of “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” ANSI/IEEE C95.3–2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in “Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,” NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the

frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 m W/g	8.00 m W/g
Partial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

2. Instruments List

Manufacturer	Device	Type	Serial Number	Due date of Calibration
Stäubli	Robot	RX90BL	F03/5W05A1/A/01	N/A
Schmid& Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1782	April 28, 2011
Schmid& Partner Engineering AG	835 MHz System Validation Dipole	D835V2	490	May 21, 2012
Schmid& Partner Engineering AG	1900 MHz System Validation Dipole	D1900V2	5d033	May 26, 2012
Schmid& Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2	734	May 27, 2012
Schmid& Partner Engineering AG	Data acquisition Electronics	DAE3	567	December 09, 2010
Schmid& Partner Engineering AG	Software	DASY 4 V4.7	-	N/A
Schmid& Partner Engineering AG	Phantom	SAM Phantom V4.0	TP-1299 TP-1300	N/A
Agilent	Network Analyzer	E5070B	MY42100282	March 31, 2011
Agilent	Dielectric Probe Kit	85070D	2184	N/A
Agilent	Power Meter	E4419B	GB43311126	September 28, 2011
Agilent	Power Sensor	E9300H	MY41495307	October 01, 2011
			MY41495308	October 01, 2011
Agilent	Signal Generator	E4421B	MY43350132	September 28, 2011
Empower RF Systems	Power Amplifier	2001-BBS3Q7ECK	1032 D/C 0336	March 31, 2011
Agilent	Dual Directional Coupler	777D 778D	50128 50454	September 28, 2011
Microlab	LP Filter	LA-15N LA-30N	N/A	October 01, 2011
R&S	Mobile Test Unit	CMU 200	107279	March 31, 2011

3.Summary of Results

FCC Power Measurement Procedures

Power measurements were performed using a base station simulator under digital average power.

The handset was placed into a simulated call using a base station simulator in shielded chamber. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

RF Conducted Power

GSM

	Channel	Frequency(MHz)	Conducted Power(dBm)				
			GSM	GPRS			
				1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM 850 Band	128	824.2	32.67	32.66	30.86	28.90	26.92
	190	836.6	32.58	32.57	30.85	28.88	26.92
	251	848.8	32.48	32.48	30.84	28.88	26.91
PCS 1900 Band	512	1850.2	29.20	29.21	27.76	27.71	25.68
	661	1880.0	29.08	29.09	27.69	27.62	25.58
	810	1909.8	29.30	29.31	27.91	27.81	25.77

	Channel	Frequency(MHz)	Conducted Power(dBm)			
			EDGE			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM 850 Band	128	824.2	26.60	25.22	23.14	21.50
	190	836.6	26.49	25.05	23.10	21.49
	251	848.8	26.24	24.74	22.90	21.25
PCS 1900 Band	512	1850.2	25.12	23.31	21.78	22.04
	661	1880.0	25.10	23.20	21.81	21.94
	810	1909.8	25.22	23.36	21.80	22.02

WLAN

802.11b Mode		Rated	Measured Power
Frequency (MHz)	Channel No.	(Mbps)	(dBm)
2412	1	1	14.57
		2	14.42
		5.5	14.28
		11	14.24
2437	6	1	12.83
		2	12.28
		5.5	12.10
		11	12.56
2462	11	1	14.57
		2	14.45
		5.5	14.21
		11	14.39

802.11g Mode		Rated	Measured Power
Frequency (MHz)	Channel No.	(Mbps)	(dBm)
2412	1	6	11.54
		9	10.99
		12	11.00
		18	11.07
		24	10.99
		36	10.95
		48	11.23
		54	11.47
2437	6	6	10.01
		9	9.98
		12	9.97
		18	9.99
		24	9.95
		36	9.92
		48	9.97
		54	9.91
2462	11	6	11.41
		9	10.97
		12	10.99
		18	11.17
		24	11.33
		36	10.90
		48	10.91
		54	11.34

WCDMA V

Band	Mode	Channel	Frequency(MHz)	Conducted Power(dBm)		
WCDMA V (RMC)	RMC	4132	826.4	22.92		
	RMC	4183	836.6	22.93		
	RMC	4233	846.6	22.78		
WCDMA V (HSDPA Active)	Sub-test 1	4132	826.4	22.68		
		4183	836.6	22.86		
		4233	846.6	22.98		
	Sub-test 2	4132	826.4	22.73		
		4183	836.6	22.83		
		4233	846.6	22.56		
	Sub-test 3	4132	826.4	22.76		
		4183	836.6	22.72		
		4233	846.6	22.54		
	Sub-test 4	4132	826.4	22.74		
		4183	836.6	22.87		
		4233	846.6	22.56		
			βc	βd	$\Delta ACK, \Delta NACK, \Delta CQI$	AGV
	Sub-test 1	2	15	8	-	
	Sub-test 2	12	15	8	-	
	Sub-test 3	15	8	8	-	
	Sub-test 4	15	4	8	-	

WCDMA II

Band	Mode	Channel	Frequency(MHz)	Conducted Power(dBm)		
WCDMA II (RMC)	RMC	9262	1852.4	23.34		
	RMC	9400	1880.0	22.97		
	RMC	9538	1907.6	23.12		
WCDMA II (HSDPA Active)	Sub-test 1	9262	1852.4	23.16		
		9400	1880.0	22.91		
		9538	1907.6	23.09		
	Sub-test 2	9262	1852.4	23.24		
		9400	1880.0	22.88		
		9538	1907.6	23.08		
	Sub-test 3	9262	1852.4	23.29		
		9400	1880.0	22.95		
		9538	1907.6	23.11		
	Sub-test 4	9262	1852.4	23.28		
		9400	1880.0	22.83		
		9538	1907.6	23.09		
			βc	βd	$\Delta ACK, \Delta NACK, \Delta CQI$	AGV
	Sub-test 1	2	15	8	-	
	Sub-test 2	12	15	8	-	
	Sub-test 3	15	8	8	-	
	Sub-test 4	15	4	8	-	

Bluetooth

Mode	Average Power(dBm)		
	Low	Mid	High
BDR	-0.7	-0.75	-0.64
EDR	-0.71	-0.82	-0.68

KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05 _Sept. 2008

Summary of SAR Evaluation Requirements for Cell Phone with Multiple Transmitters

These procedures were followed according to KDB 648474 document “SAR Handsets Multi Xmitter and Ant v01r05”, September 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

<Output Power Thresholds for Unlicensed Transmitters>

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

<SAR Evaluation Requirements for Cellphones with Multiple Transmitters>

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: Unlicensed only
Unlicensed Transmitters	<p>When there is no simultaneous transmission –</p> <ul style="list-style-type: none"> output ≤ 60f: SAR not required output > 60f: stand-alone SAR required <p>When there is simultaneous transmission – <u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <p><u>Otherwise stand-alone SAR is required</u></p> <p>When stand-alone SAR is required</p> <ul style="list-style-type: none"> test SAR on highest output channel for each wireless mode and exposure condition if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures 	<ul style="list-style-type: none"> when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <p>Licensed & Unlicensed</p> <ul style="list-style-type: none"> when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <p>SAR required: Licensed & Unlicensed</p> <p>antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Jaw, Mouth and Nose	<p><u>Flat phantom SAR required</u></p> <ul style="list-style-type: none"> when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations 	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

<KDB 648474 Simultaneous SAR evaluation>

Mode (f)	P (dBm)	P (mW)	Stand-alone SAR
GSM 850	32.67	1849.27	Yes
PCS 1900	29.31	853.10	Yes
WCDMA V	22.98	198.61	Yes
WCDMA II	23.34	215.77	Yes
Bluetooth	-0.64	0.86	No
WLAN	14.57	28.64	Yes

⇒ Simultaneous and Stand-alone SAR for Bluetooth is not required.

Mode pair	D _{xy} (mm)	The sum of all 1g SAR	Simultaneous Tx SAR	Notes
GSM/WCDMA & 802.11 b/g	75	1.15 + 0.311 = 1.461	No	d _{xy} > 5 cm, the sum of all 1g SAR < 1.6 W/kg
GSM/WCDMA & Bluetooth	75	1.15 + BT < 1.6	No	d _{xy} > 5 cm, the sum of all 1g SAR < 1.6 W/kg
802.11 b/g & Bluetooth	-	0.311 + BT << 1.6	No	BT & WLAN using same antenna can't transmit simultaneously

* Please see Antenna distance file for finding all distances.

GSM850 Head SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2010-11-10

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	836.6	190	-0.031	0.713	1.6
	Tilt	836.6	190	-0.112	0.341	
Right Ear	Cheek	836.6	190	-0.114	0.636	
	Tilt	836.6	190	-0.068	0.398	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

GSM850 Body SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2010-11-10

Test Mode	EUT Position	Slot	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
GPRS	Front	1 Tx	836.6	190	-0.131	0.368	1.6
	Back	1 Tx	836.6	190	-0.085	0.588	
	Back	2 Tx	836.6	190	-0.117	0.745	
	Back	3 Tx	836.6	190	-0.160	0.722	
	Back	4 Tx	836.6	190	-0.064	0.610	
GSM	Back	-	836.6	190	0.008	0.308	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. The distance from EUT to flat phantom for testing Body SAR is 20 mm.
6. SAR was checked on front body because it can be used with accessories like ear set on front body side.
7. This model supports GPRS (Class 12) and EDGE. The power in GPRS mode is higher than in EDGE mode and all Tx (1Tx ~ 4Tx) cases of GPRS were investigated.

PCS1900 Head SAR

Ambient Temperature (°C)	22.0
Liquid Temperature (°C)	22.0
Date	2010-11-11

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	1880.0	661	-0.055	0.496	1.6
	Tilt	1880.0	661	0.007	0.309	
Right Ear	Cheek	1880.0	661	-0.108	0.787	
	Tilt	1880.0	661	-0.029	0.385	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

PCS1900 Body SAR

Ambient Temperature (°C)	22.0
Liquid Temperature (°C)	22.0
Date	2010-11-11

Test Mode	EUT Position	Slot	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
GPRS	Front	1 Tx	1880.0	661	-0.090	0.205	1.6
	Back	1 Tx	1880.0	661	-0.025	0.210	
	Back	2 Tx	1880.0	661	-0.097	0.320	
	Back	3 Tx	1880.0	661	-0.125	0.465	
	Back	4 Tx	1880.0	661	-0.026	0.387	
GSM	Front	-	1880.0	661	-0.017	0.168	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. The distance from EUT to flat phantom for testing Body SAR is 20 mm.
6. SAR was checked on front body because it can be used with accessories like ear set on front body side.
7. This model supports GPRS (Class 12) and EDGE. The power in GPRS mode is higher than in EDGE mode and all Tx (1Tx ~ 4Tx) cases of GPRS were investigated.

WCDMA V Head SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2010-11-10

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	836.6	4183	-0.078	0.493	1.6
	Tilt	836.6	4183	-0.169	0.266	
Right Ear	Cheek	836.6	4183	-0.175	0.414	
	Tilt	836.6	4183	-0.094	0.265	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. WCDMA mode was tested under RMC 12.2 kbps with HSDPA Inactive.

WCDMA V Body SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2010-11-10

Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
RMC	Front	836.6	4183	-0.121	0.235	1.6
	Back	836.6	4183	0.115	0.373	
HSDPA	Back	836.6	4183	-0.036	0.252	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. The distance from EUT to flat phantom for testing Body SAR is 20 mm.
6. SAR was checked on front body because it can be used with accessories like ear set on front body side.
7. This model supports WCDMA V with HSDPA. It was tested in RMC mode, and HSDPA mode is tested at a worst case.

WCDMA II Head SAR

Ambient Temperature (°C)	22.0
Liquid Temperature (°C)	22.0
Date	2010-11-11

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	1880.0	9400	-0.188	0.768	1.6
	Tilt	1880.0	9400	0.114	0.443	
Right Ear	Cheek	1852.4	9262	0.014	0.943	
	Cheek	1880.0	9400	0.191	1.15	
	Cheek	1907.6	9538	0.079	0.973	
	Tilt	1880.0	9400	0.056	0.572	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. WCDMA mode was tested under RMC 12.2 kbps and HSDPA Inactive because the power in RMC is higher than in HSDPA Active.

WCDMA II Body SAR

Ambient Temperature (°C)	22.0
Liquid Temperature (°C)	22.0
Date	2010-11-11

Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
RMC	Front	1880.0	9400	0.112	0.302	1.6
	Back	1880.0	9400	0.087	0.290	
HSDPA	Back	1880.0	9400	0.098	0.206	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. The distance from EUT to flat phantom for testing Body SAR is 20 mm.
6. SAR was checked on front body because it can be used with accessories like ear set on front body side.
7. This model supports WCDMA II with HSDPA. It was tested in RMC mode, and HSDPA mode is tested at a worst case.

WLAN Head SAR

Ambient Temperature (°C)	22.3
Liquid Temperature (°C)	22.3
Date	2010-11-15

Head	Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
Left Ear	11b	Cheek	2437	6	-0.057	0.178	1.6
	11b	Tilt	2437	6	-0.063	0.216	
	11g	Tilt	2437	6	-0.135	0.107	
Right Ear	11b	Cheek	2412	1	0.119	0.302	
	11b	Cheek	2437	6	-0.128	0.311	
	11b	Cheek	2462	11	-0.066	0.234	
	11b	Tilt	2437	6	0.181	0.187	
	11g	Cheek	2437	6	0.065	0.130	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. WLAN could be used for data transmission during voice communication at the same time.
6. KDB 248227 <SAR Measurement Procedures for 802.11 a/b/g Transmitters>
 - Channel 1, 6 and 11 were tested by the definition of “default test channels”.

WLAN Body SAR

Ambient Temperature (°C)	22.3
Liquid Temperature (°C)	22.3
Date	2010-11-15

Body	Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
Body	11b	Front	2437	6	-0.140	0.065	1.6
	11b	Back	2412	1	0.039	0.070	
	11b	Back	2437	6	0.053	0.098	
	11b	Back	2462	11	-0.014	0.068	
	11g	Back	2437	6	0.015	0.041	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
5. The distance from EUT to flat phantom for testing Body SAR is 20 mm.
(Please refer to the conduction power table Page 15)
6. KDB 248227 <SAR Measurement Procedures for 802.11 a/b/g Transmitters>
- Channel 1, 6 and 11 were tested by the definition of “default test channels”.

Appendix

List

Appendix A	DASY4 Report (Plots of the SAR Measurements)	- 835 MHz, 1900 MHz, 2450 MHz Validation Test - GSM850 Test - PCS1900 Test - WCDMA V Test - WCDMA II Test - WLAN Test
Appendix B	Uncertainty Analysis	
Appendix C	Calibration Certificate	- PROBE - DAE - DIPOLE



Report File No. : F690501/RF-SAR001905-A1
Date of Issue : 2010-12-02
Page : 31 / 147

Appendix A

Test Plot - DASY4 Report

835 MHz Validation Test

Date/Time: 2010-11-10 10:59:38

Test Laboratory: SGS Testing Korea
 File Name: [Validation 835 MHz.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490
 Program Name: Validation 835 MHz


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation 835 MHz/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.71 mW/g

Validation 835 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 57.5 V/m; Power Drift = -0.033 dB
 Peak SAR (extrapolated) = 3.69 W/kg
 SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.65 mW/g
 Maximum value of SAR (measured) = 2.71 mW/g

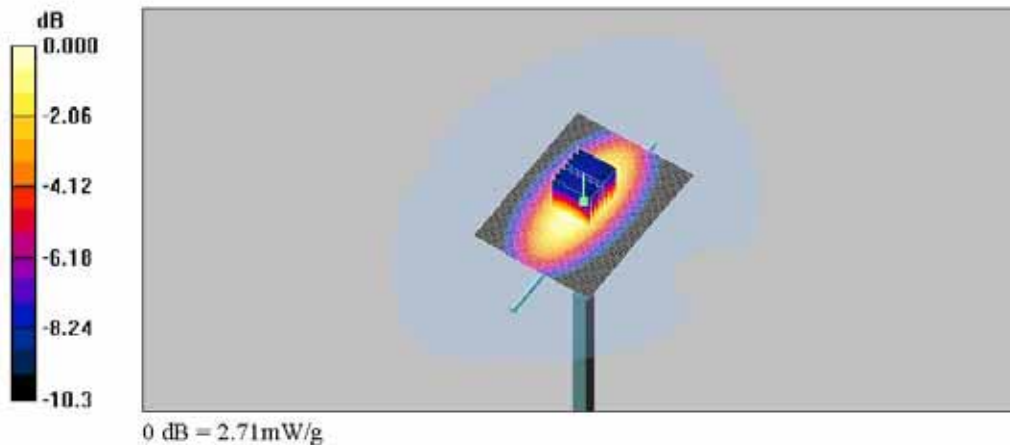

Z Scan

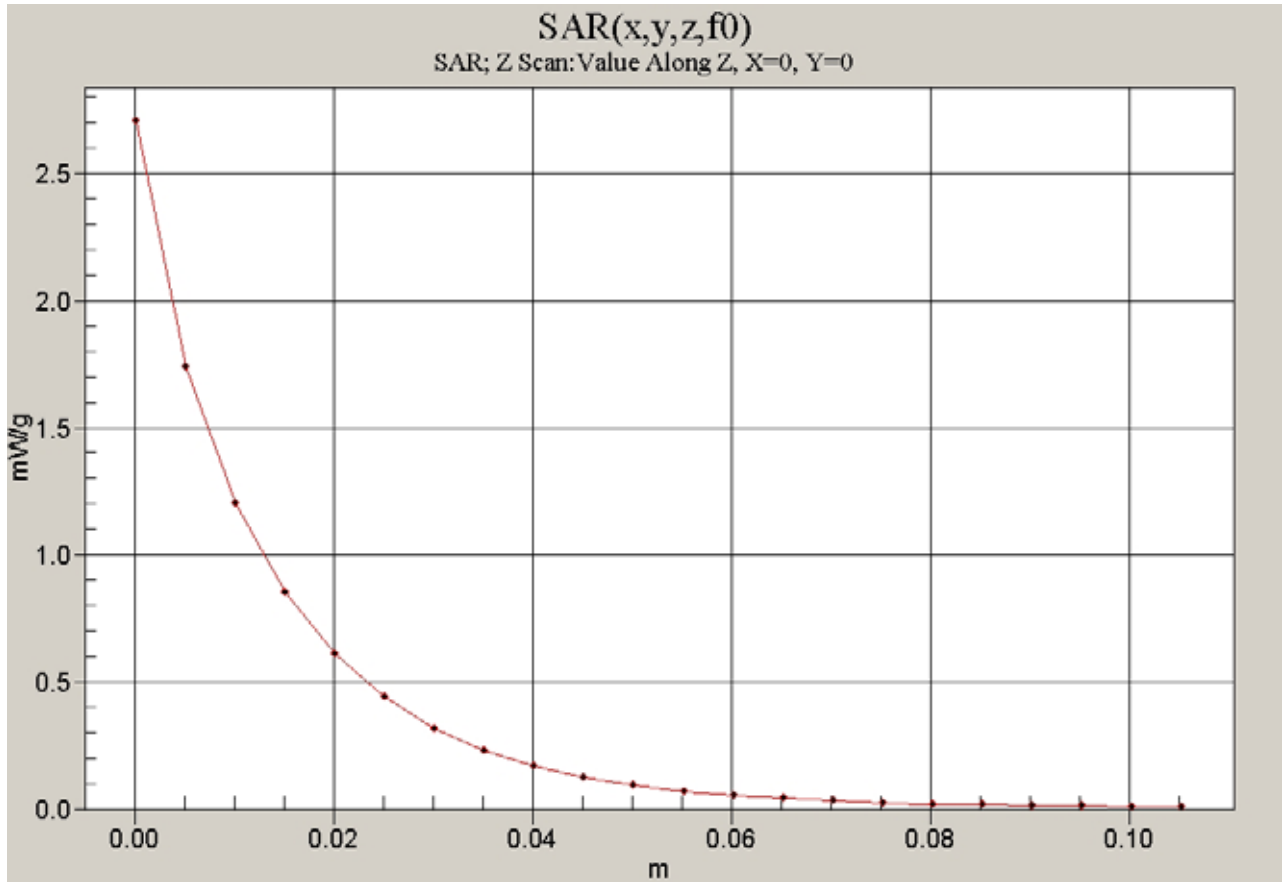

835 MHz Validation Test-1

Date/Time: 2010-12-01 9:10:37

Test Laboratory: SGS Testing Korea
 File Name: [Validation 835 MHz.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490
 Program Name: Validation 835


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation 835/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.63 mW/g

Validation 835/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 56.1 V/m; Power Drift = -0.017 dB
 Peak SAR (extrapolated) = 3.57 W/kg
 SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.61 mW/g
 Maximum value of SAR (measured) = 2.63 mW/g

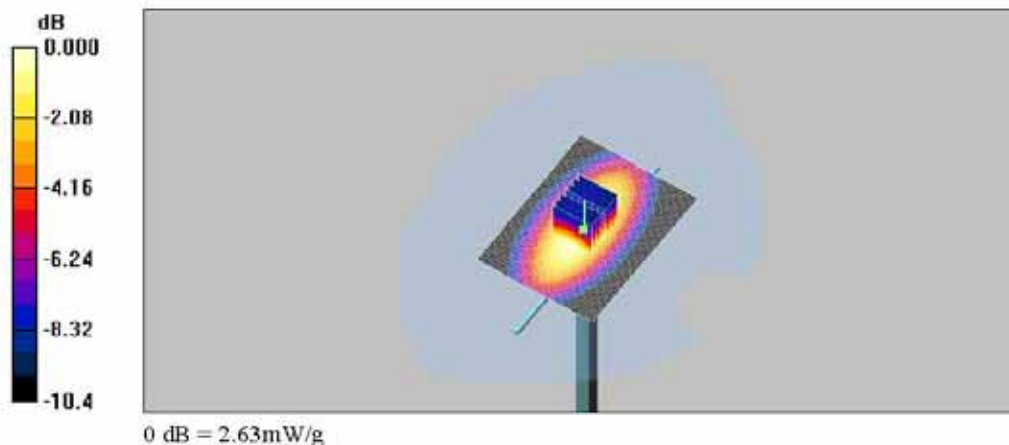

Z Scan

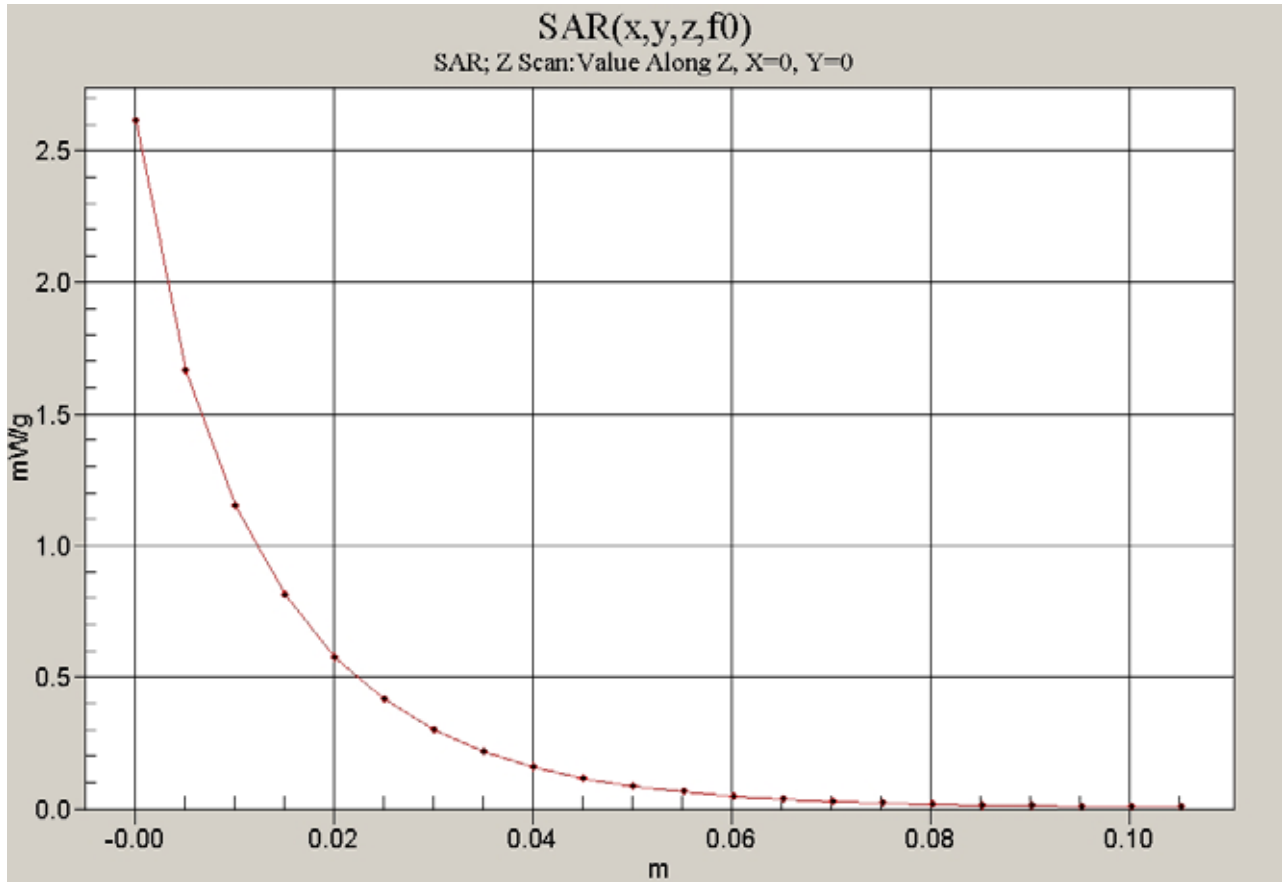

1900 MHz Validation Test

Date/Time: 2010-11-11 10:27:19

Test Laboratory: SGS Testing Korea
 File Name: [Validation 1900 MHz.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033
 Program Name: Validation 1900 MHz


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation 1900 MHz/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 12.6 mW/g

Validation 1900 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 90.6 V/m; Power Drift = -0.034 dB
 Peak SAR (extrapolated) = 17.8 W/kg
 SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.35 mW/g
 Maximum value of SAR (measured) = 11.6 mW/g

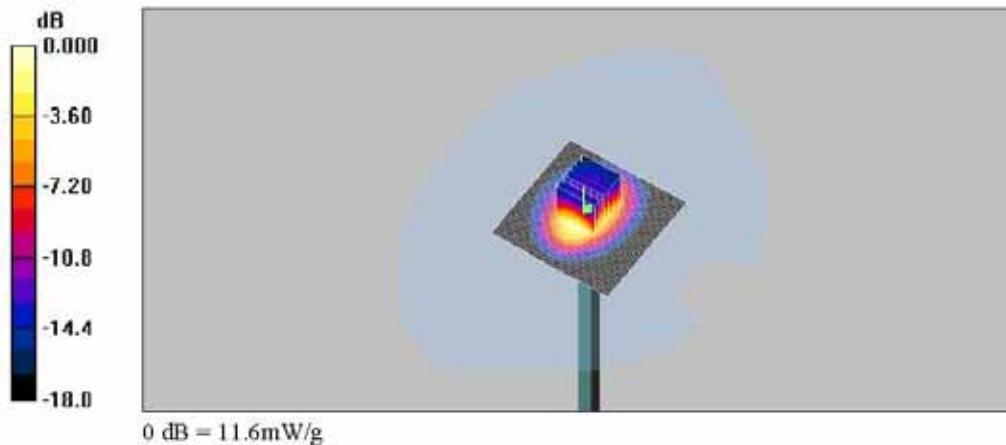

Z Scan

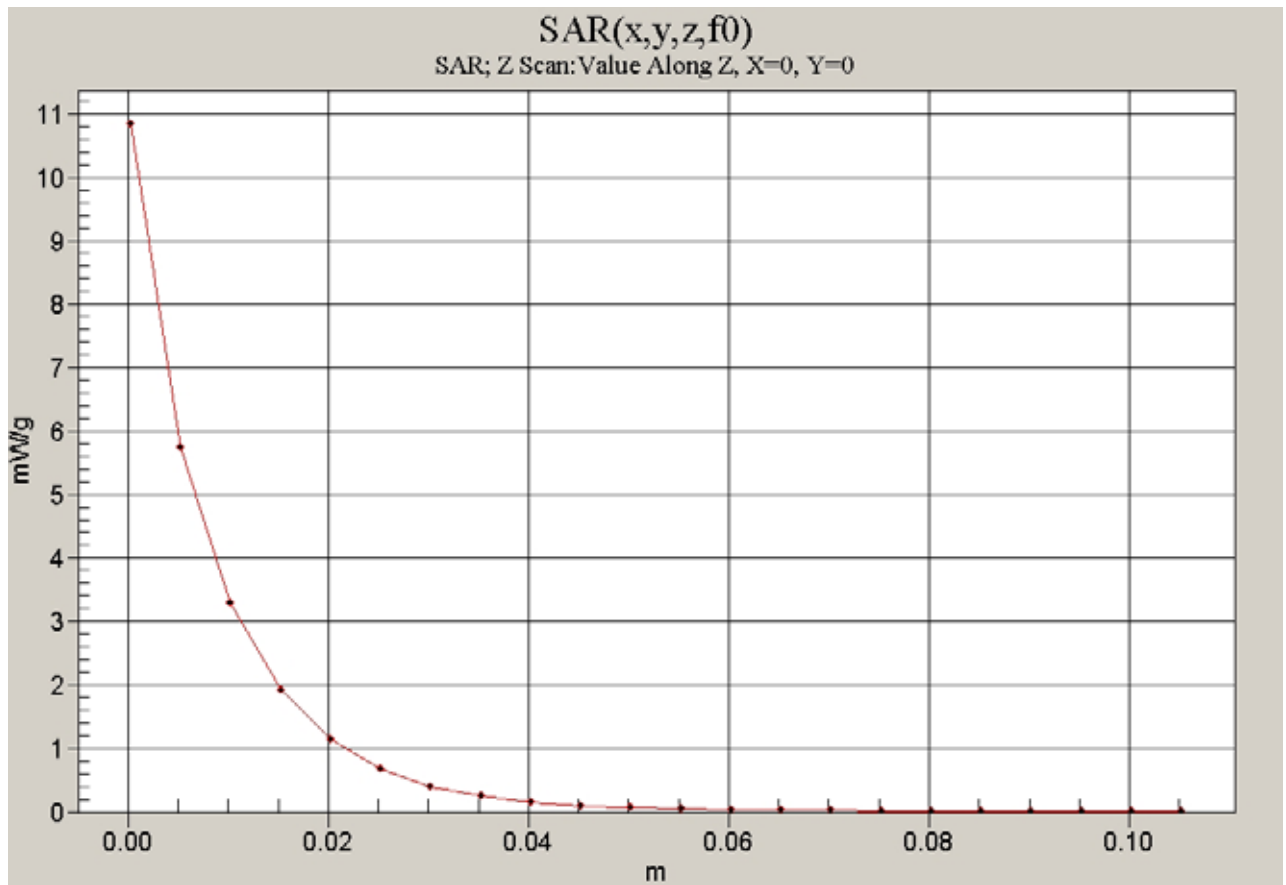

1900 MHz Validation Test-1

Date/Time: 2010-12-01 1:35:52

Test Laboratory: SGS Testing Korea
 File Name: [Validation1900 MHz.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033
 Program Name: Validation1900


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation1900/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 11.9 mW/g

Validation1900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 94.8 V/m; Power Drift = -0.017 dB
 Peak SAR (extrapolated) = 17.2 W/kg
 SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.49 mW/g
 Maximum value of SAR (measured) = 11.7 mW/g

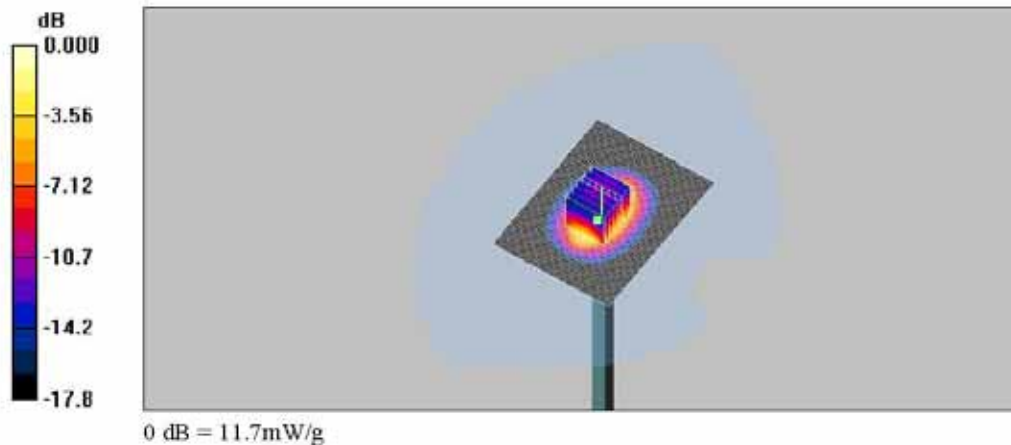

Z Scan

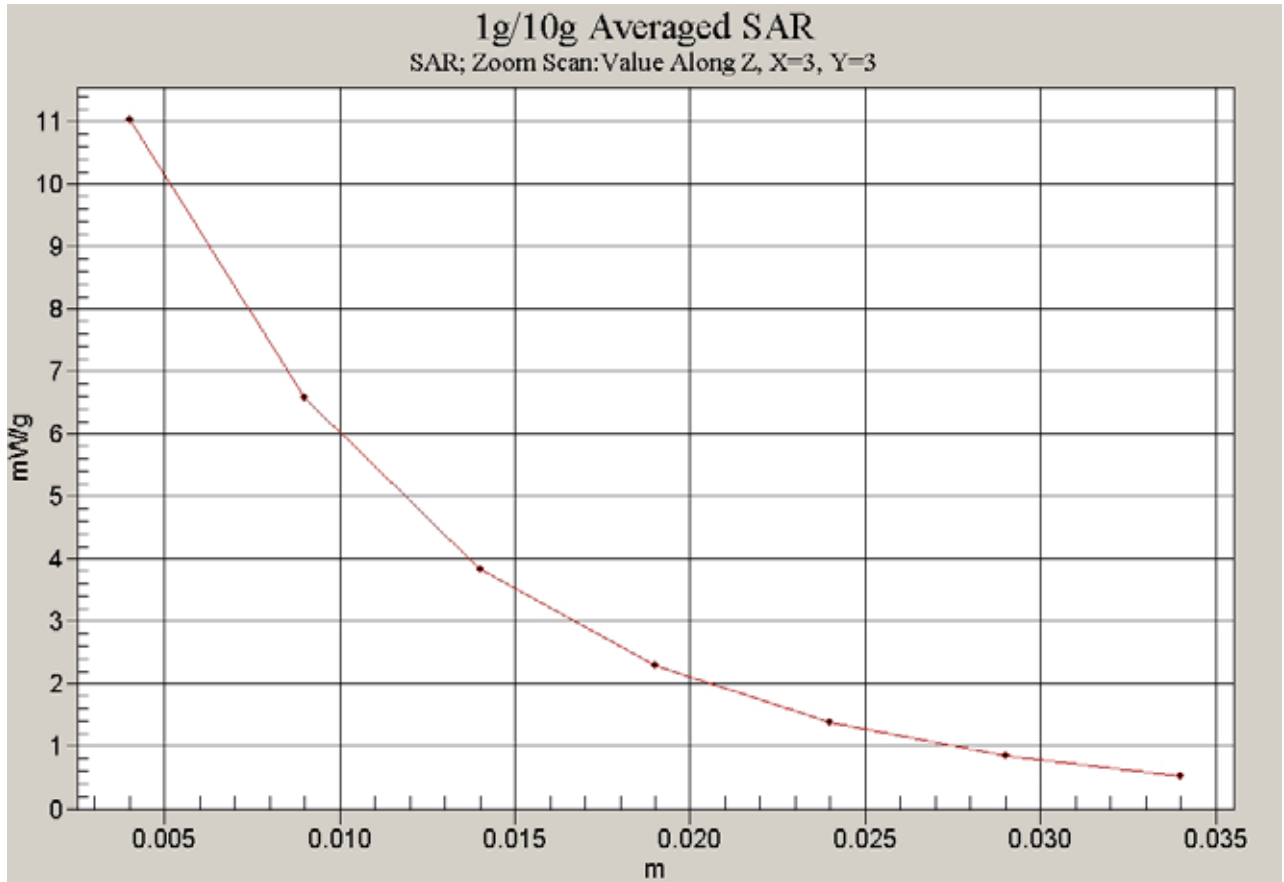

2450 MHz Validation Test_Head

Date/Time: 2010-11-15 10:25:41

Test Laboratory: SGS Testing Korea
 File Name: [Validation 2450 MHz_Head.da4](#)


DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734
 Program Name: Validation 2450 MHz_Head

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation 2450 MHz_Head/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 15.9 mW/g

Validation 2450 MHz_Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 86.6 V/m; Power Drift = -0.003 dB
 Peak SAR (extrapolated) = 28.8 W/kg
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.84 mW/g
 Maximum value of SAR (measured) = 14.7 mW/g

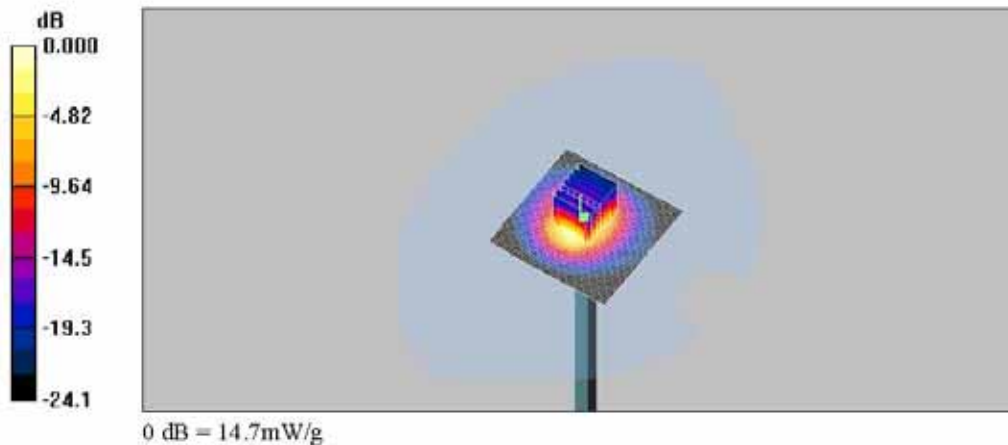

Z Scan

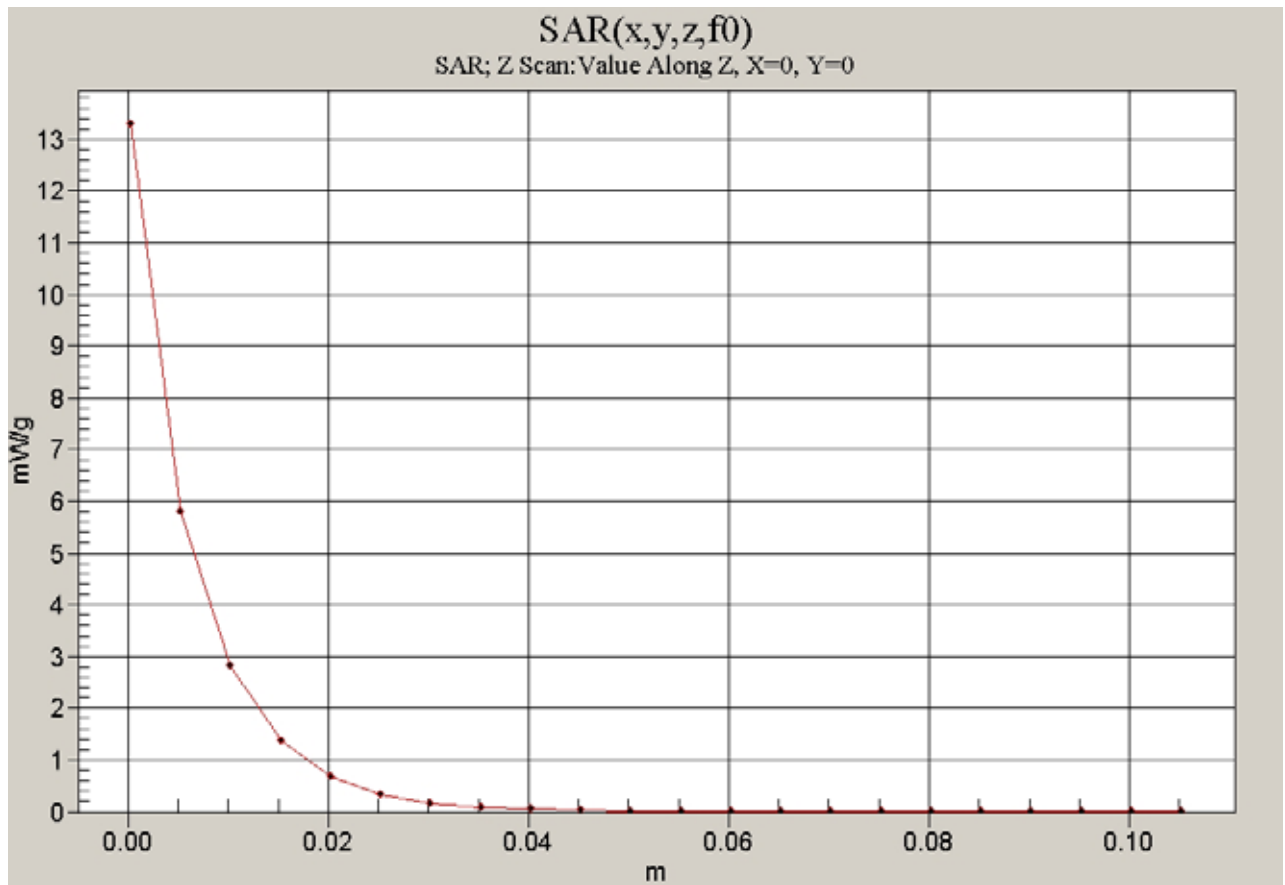

2450 MHz Validation Test_Body

Date/Time: 2010-11-15 5:10:09

Test Laboratory: SGS Testing Korea
 File Name: [Validation 2450 MHz_Body.da4](#)


DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734
 Program Name: Validation 2450 MHz_Body

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Validation 2450 MHz_Body/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 16.0 mW/g

Validation 2450 MHz_Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 80.9 V/m; Power Drift = -0.064 dB
 Peak SAR (extrapolated) = 31.3 W/kg
SAR(1 g) = 13 mW/g; SAR(10 g) = 5.75 mW/g
 Maximum value of SAR (measured) = 14.4 mW/g

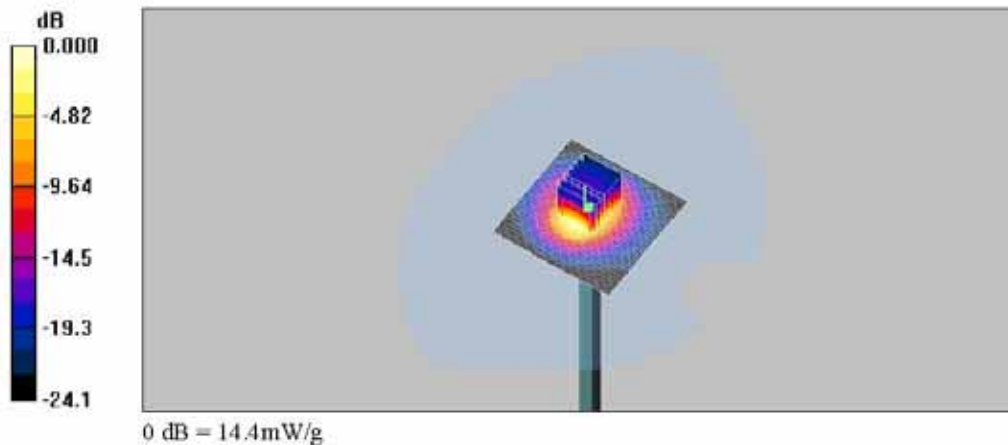

Z Scan

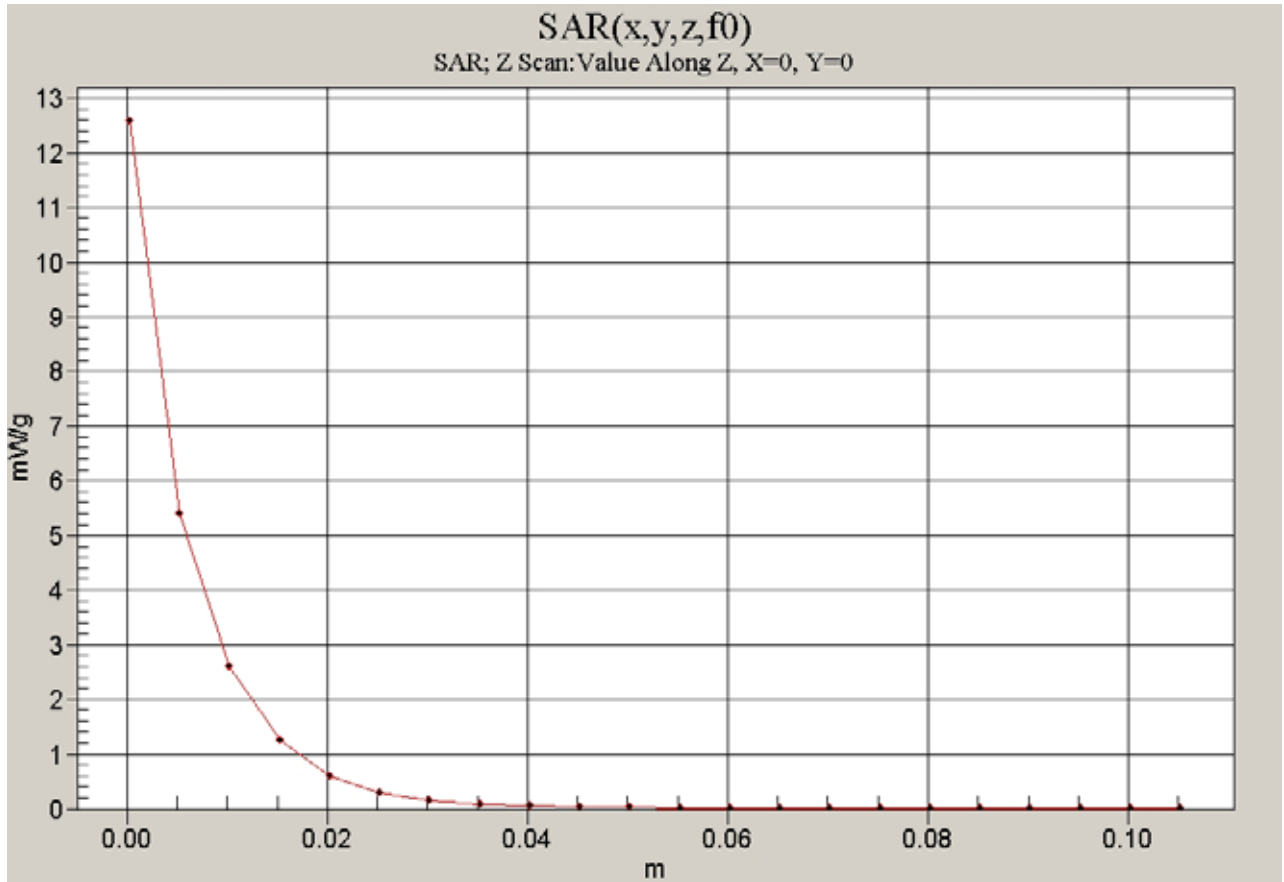

GSM 850 Head SAR Test

Date/Time: 2010-11-10 11:34:22

Test Laboratory: SGS Testing Korea
 File Name: [GSM850_LE.daf](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.782 mW/g

LE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.40 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 0.910 W/kg
SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.509 mW/g
 Maximum value of SAR (measured) = 0.763 mW/g

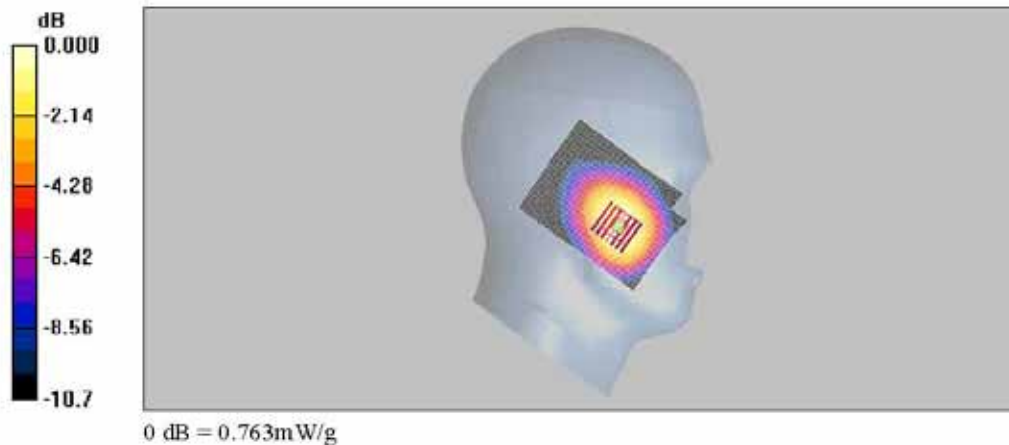

Z Scan

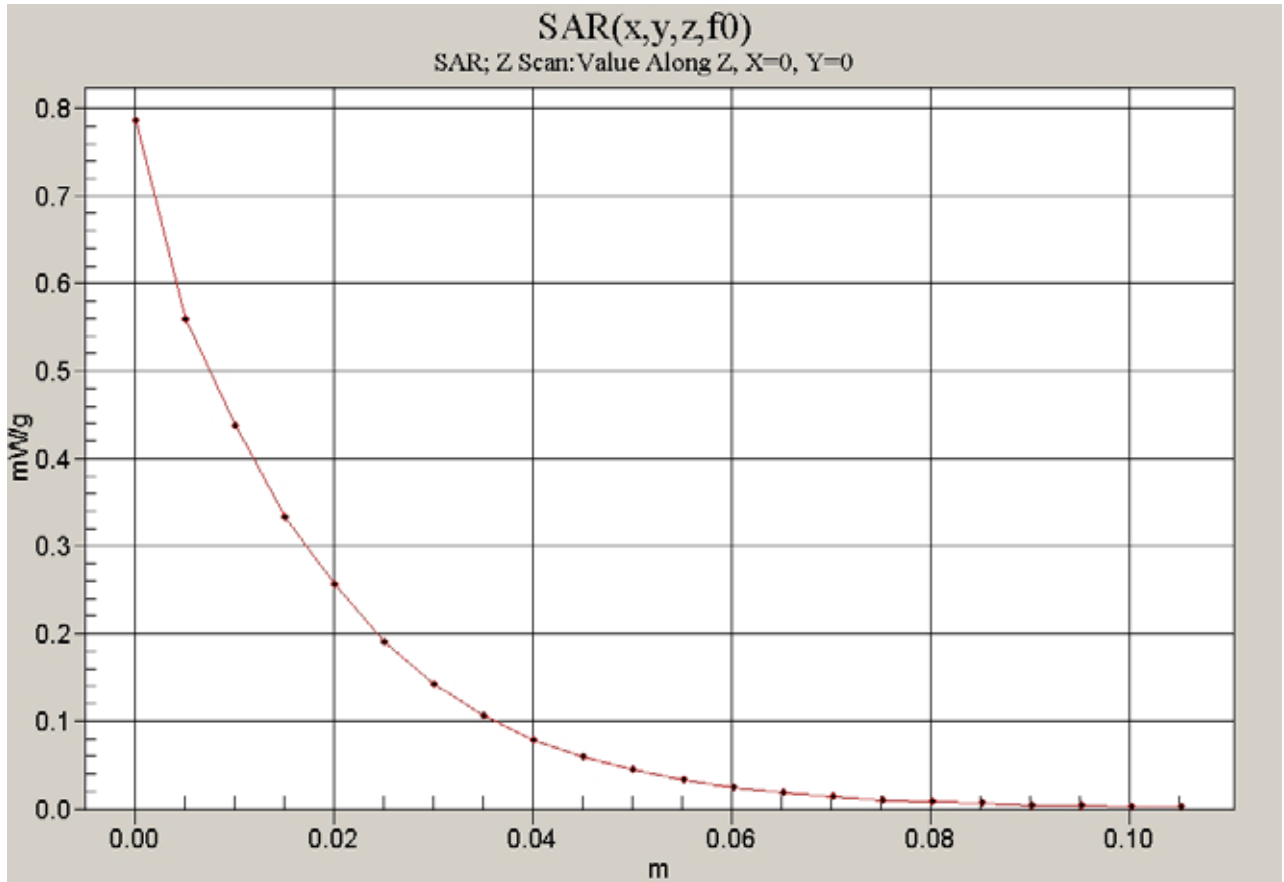

Date/Time: 2010-11-10 11:56:24

Test Laboratory: SGS Testing Korea
 File Name: [GSM850_LE.d44](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.369 mW/g

LE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 15.3 V/m; Power Drift = -0.112 dB
 Peak SAR (extrapolated) = 0.436 W/kg
SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.252 mW/g
 Maximum value of SAR (measured) = 0.358 mW/g

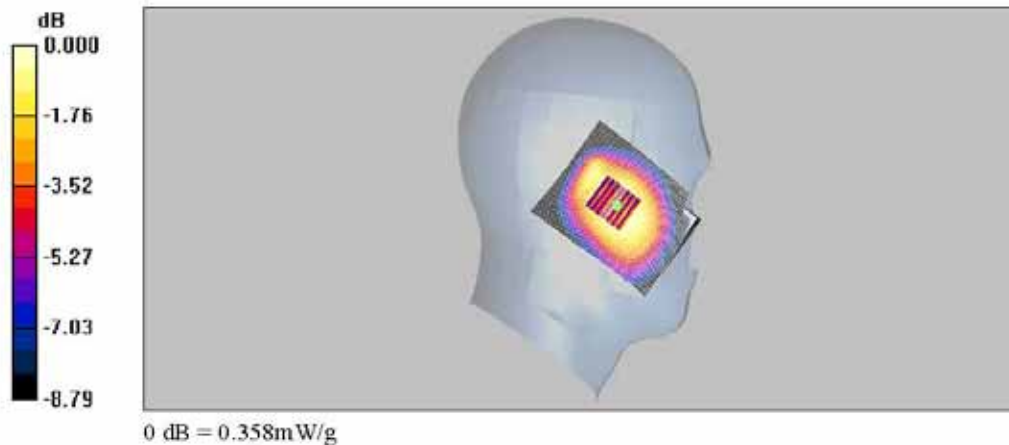

Date/Time: 2010-11-10 12:25:07

Test Laboratory: SGS Testing Korea
File Name: [GSM850_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: GSM850


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.681 mW/g

RE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.1 V/m; Power Drift = -0.114 dB
Peak SAR (extrapolated) = 0.858 W/kg
SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.455 mW/g
Maximum value of SAR (measured) = 0.690 mW/g

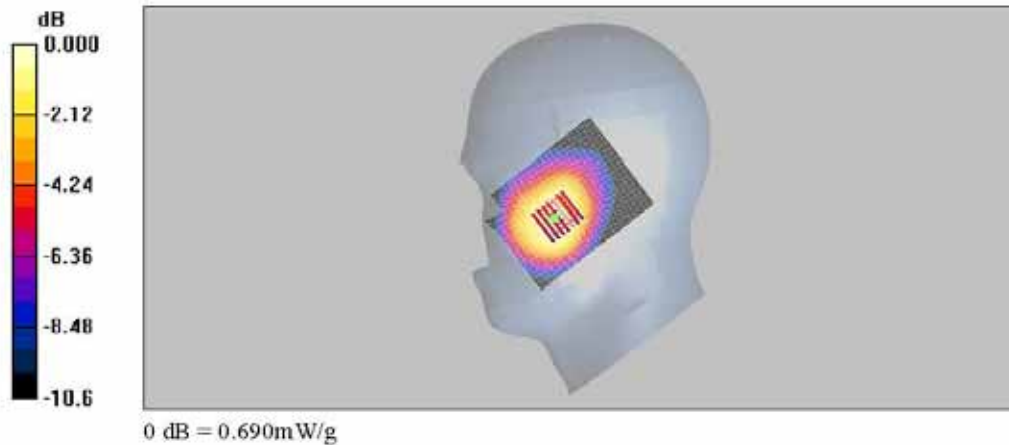

Date/Time: 2010-11-10 1:02:50

Test Laboratory: SGS Testing Korea
 File Name: [GSM850_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.428 mW/g

RE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 17.5 V/m; Power Drift = -0.068 dB
 Peak SAR (extrapolated) = 0.511 W/kg
SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.291 mW/g
 Maximum value of SAR (measured) = 0.419 mW/g

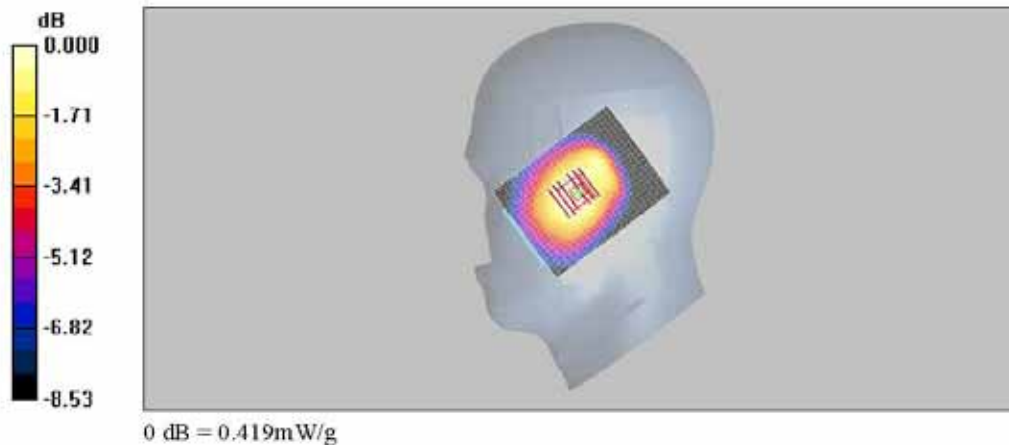

GSM850 Body SAR Test

Date/Time: 2010-11-10 6:40:37

Test Laboratory: SGS Testing Korea
 File Name: [GPRS850_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850_Body


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.396 mW/g

GPRS850_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.65 V/m; Power Drift = -0.131 dB
 Peak SAR (extrapolated) = 0.484 W/kg
SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.266 mW/g
 Maximum value of SAR (measured) = 0.389 mW/g

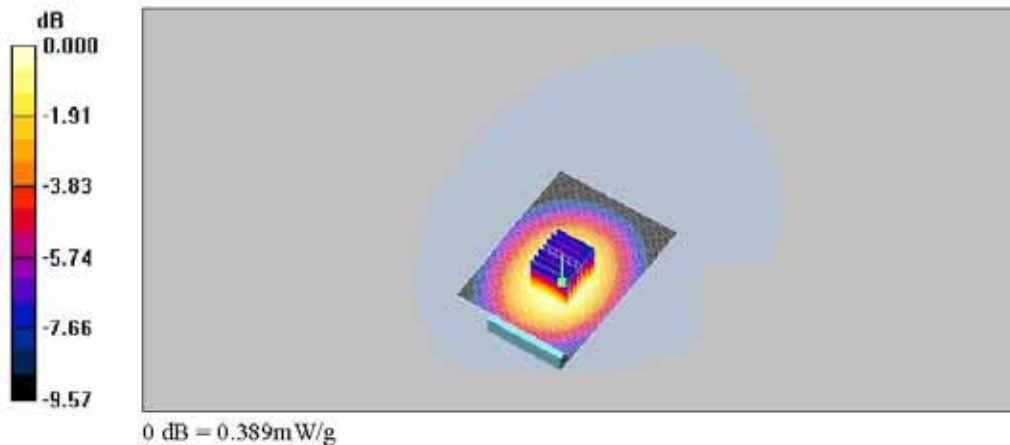

Date/Time: 2010-11-10 7:10:58

Test Laboratory: SGS Testing Korea
 File Name: [GPRS850_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850_Body


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.629 mW/g

GPRS850_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.4 V/m; Power Drift = -0.085 dB
 Peak SAR (extrapolated) = 0.797 W/kg
 SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.416 mW/g
 Maximum value of SAR (measured) = 0.621 mW/g

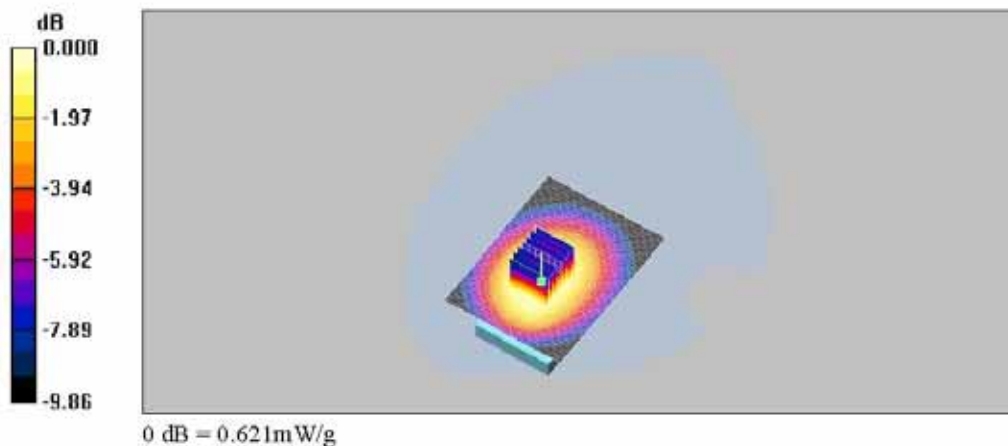

Date/Time: 2010-12-01 10:15:26

Test Laboratory: SGS Testing Korea
 File Name: [GPRS850_2Tx_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850_Body


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850_2Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.796 mW/g

GPRS850_2Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.0 V/m; Power Drift = -0.117 dB
 Peak SAR (extrapolated) = 0.966 W/kg
 SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.539 mW/g
 Maximum value of SAR (measured) = 0.783 mW/g

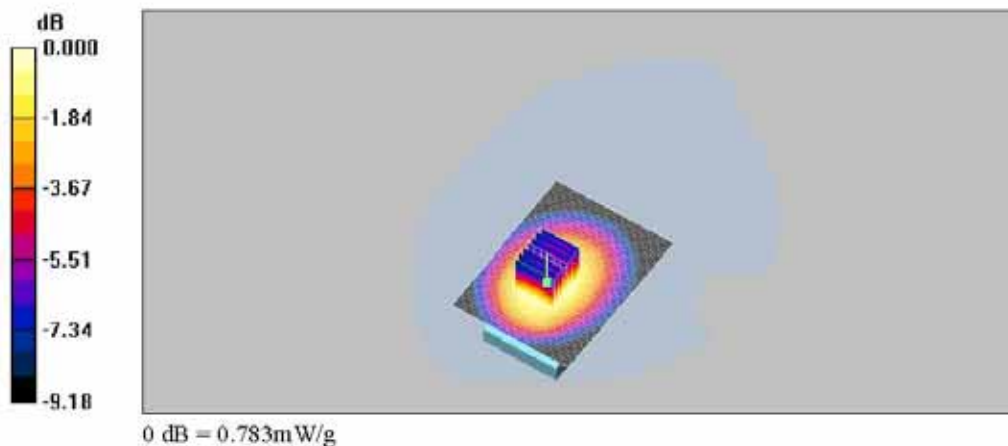

Z Scan

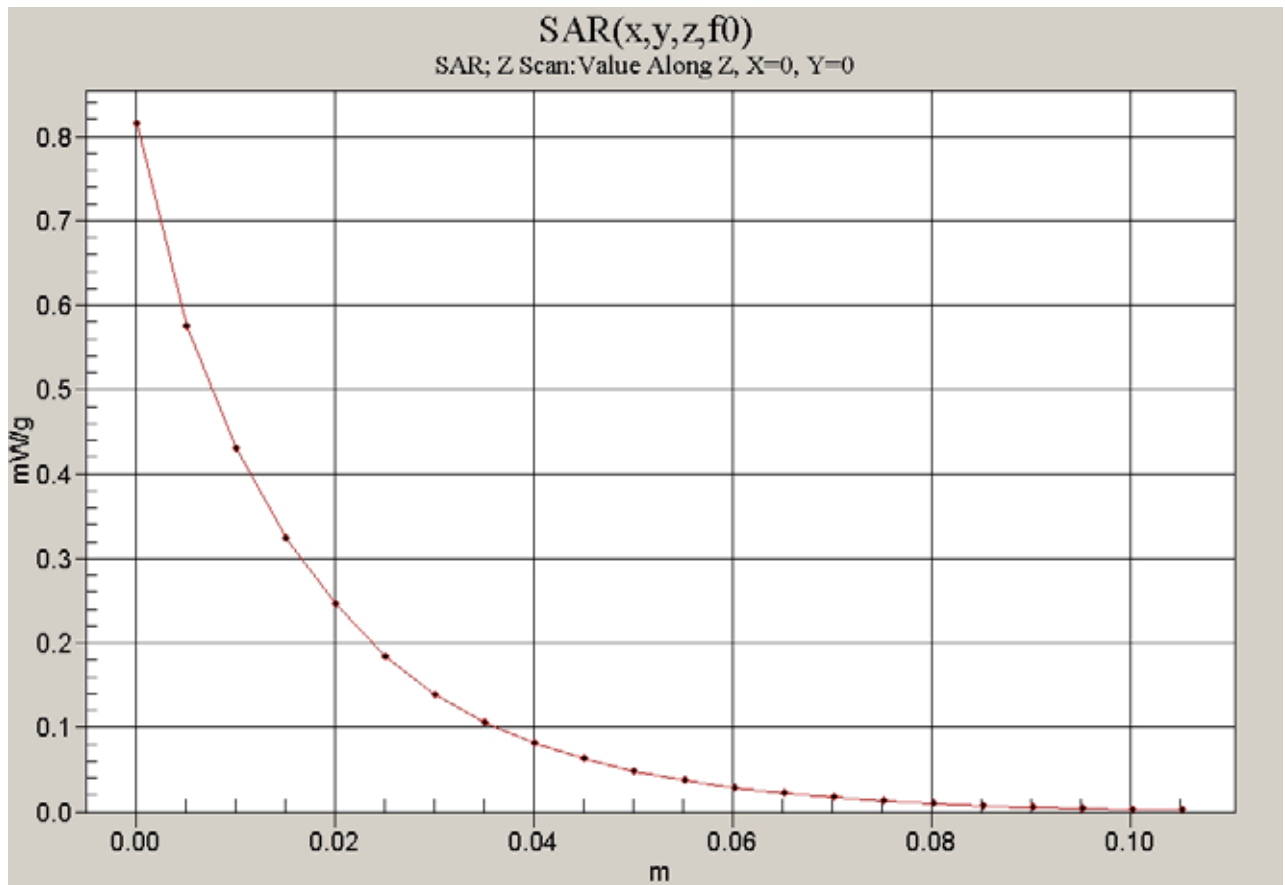

Date/Time: 2010-12-01 11:11:01

Test Laboratory: SGS Testing Korea
 File Name: [GPRS850_3Tx_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850_Body


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.67
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850_3Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.786 mW/g

GPRS850_3Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.1 V/m; Power Drift = -0.160 dB
 Peak SAR (extrapolated) = 0.925 W/kg
 SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.523 mW/g
 Maximum value of SAR (measured) = 0.760 mW/g

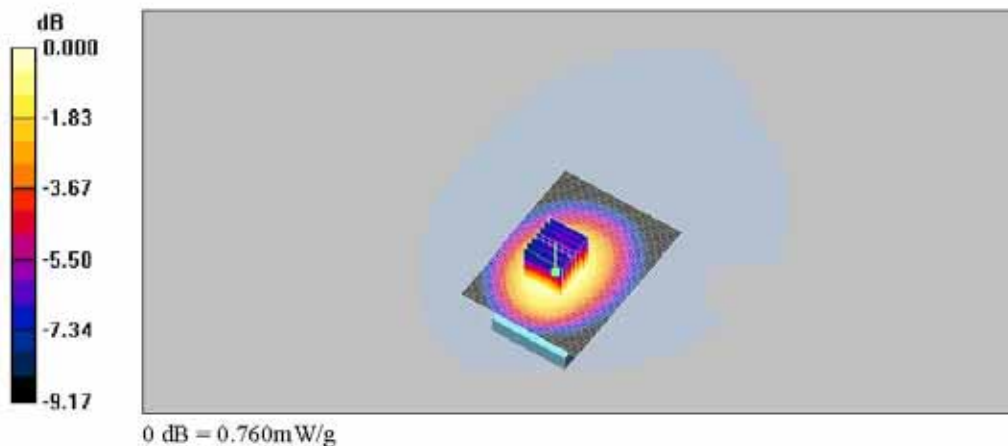

Date/Time: 2010-12-01 11:55:31

Test Laboratory: SGS Testing Korea
 File Name: [GPRS850_4Tx_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: GSM850_Body


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850_4Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.647 mW/g

GPRS850_4Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.4 V/m; Power Drift = -0.064 dB
 Peak SAR (extrapolated) = 0.785 W/kg
 SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.442 mW/g
 Maximum value of SAR (measured) = 0.651 mW/g

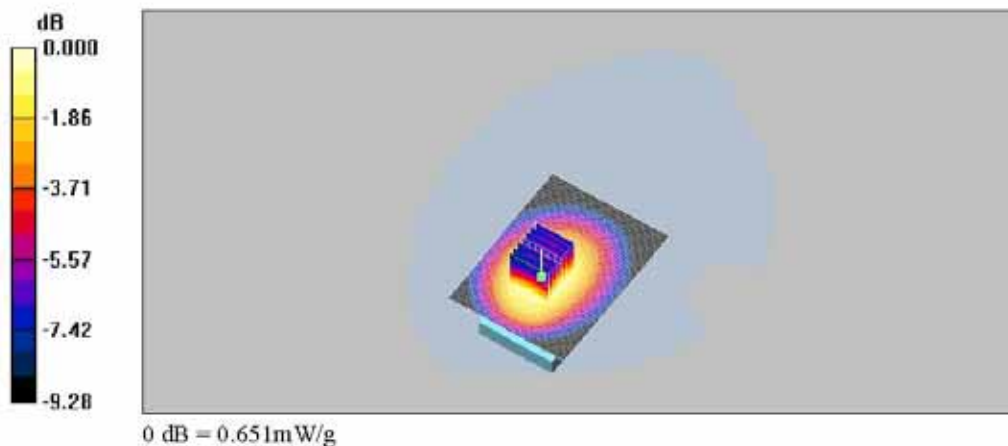

Date/Time: 2010-11-10 7:41:47

Test Laboratory: SGS Testing Korea
File Name: [GSM850_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: GSM850_Body


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.331 mW/g

GSM850_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.7 V/m; Power Drift = 0.008 dB
Peak SAR (extrapolated) = 0.425 W/kg
SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.218 mW/g
Maximum value of SAR (measured) = 0.326 mW/g

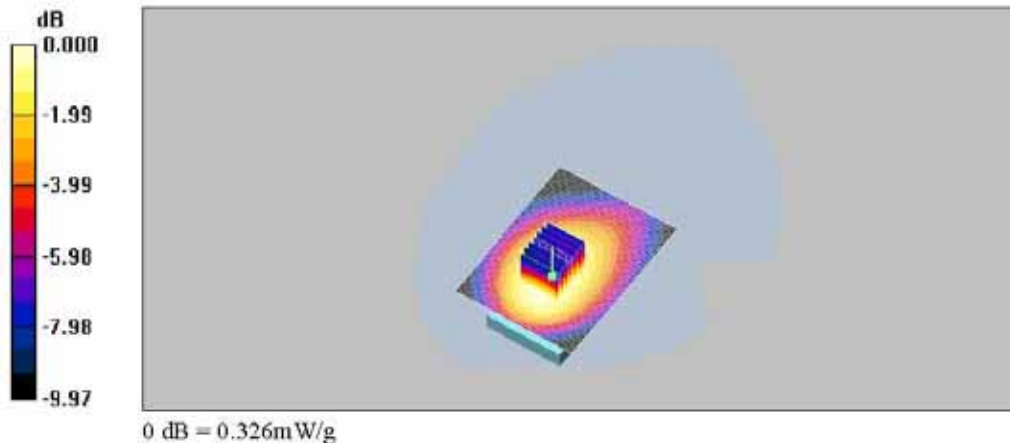

PCS1900 Head SAR Test

Date/Time: 2010-11-11 11:04:54

Test Laboratory: SGS Testing Korea
 File Name: [PCS1900_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS1900


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.607 mW/g

LE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.29 V/m; Power Drift = -0.055 dB
 Peak SAR (extrapolated) = 0.697 W/kg
SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.319 mW/g
 Maximum value of SAR (measured) = 0.535 mW/g

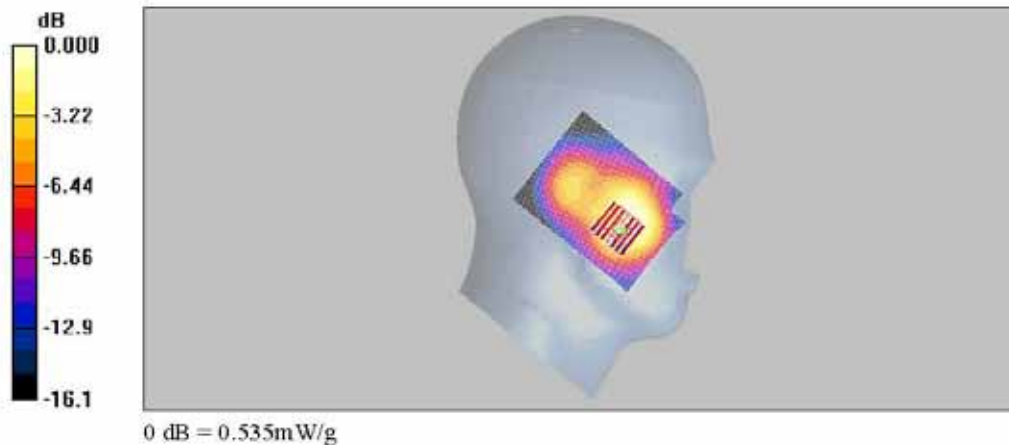

Date/Time: 2010-11-11 11:26:27

Test Laboratory: SGS Testing Korea
File Name: [PCS1900_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: PCS1900


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.387 mW/g

LE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.1 V/m; Power Drift = 0.007 dB
Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.190 mW/g
Maximum value of SAR (measured) = 0.339 mW/g

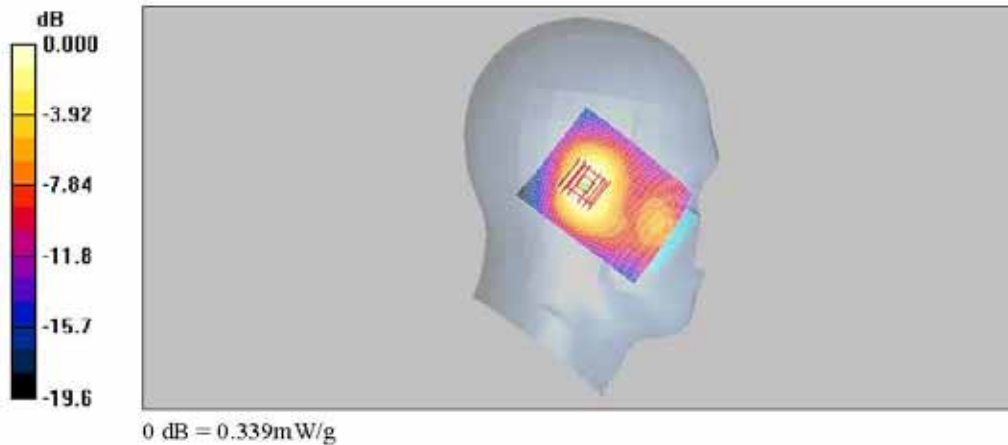

Date/Time: 2010-11-11 11:56:11

Test Laboratory: SGS Testing Korea
File Name: [PCS1900_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: PCS1900


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.894 mW/g

RE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.7 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.460 mW/g
Maximum value of SAR (measured) = 0.856 mW/g

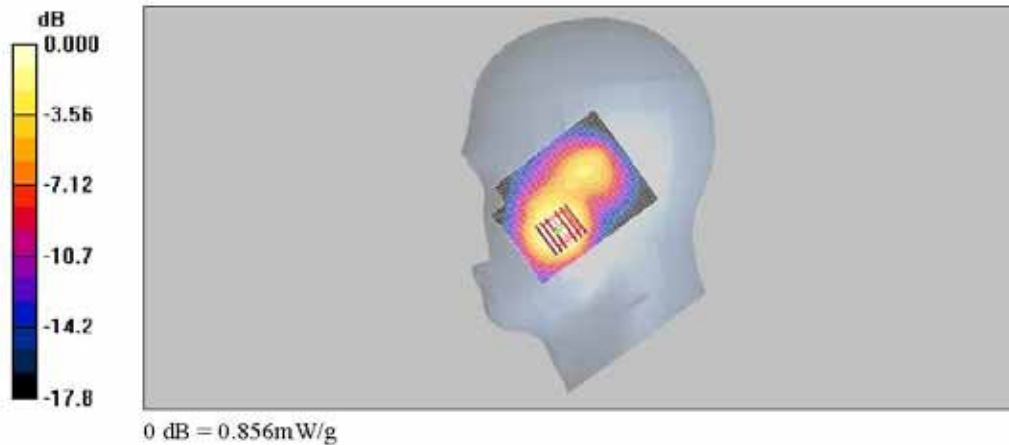

Z Scan

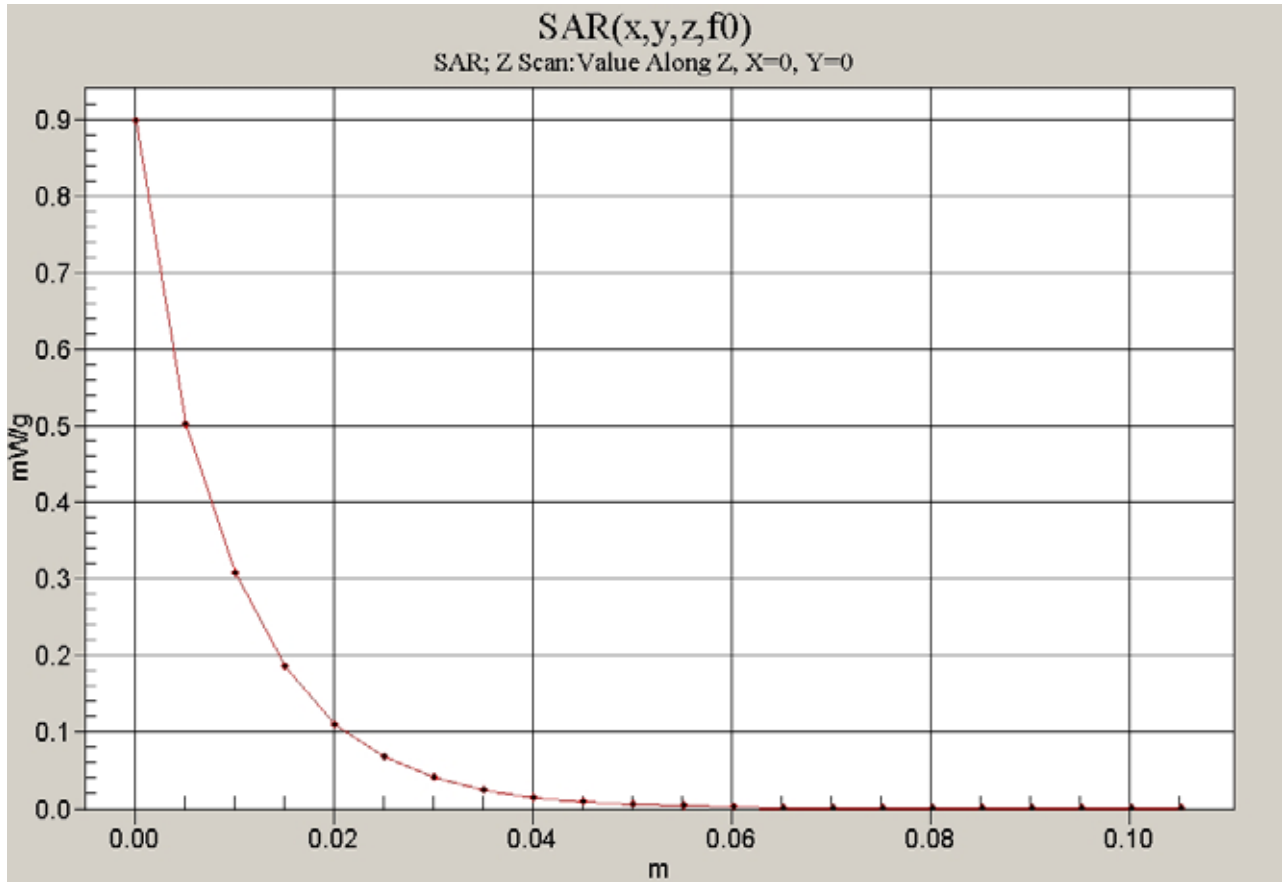

Date/Time: 2010-11-11 12:25:10

Test Laboratory: SGS Testing Korea
File Name: [PCS1900_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: PCS1900


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.506 mW/g

RE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.4 V/m; Power Drift = -0.029 dB
Peak SAR (extrapolated) = 0.581 W/kg
SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.418 mW/g

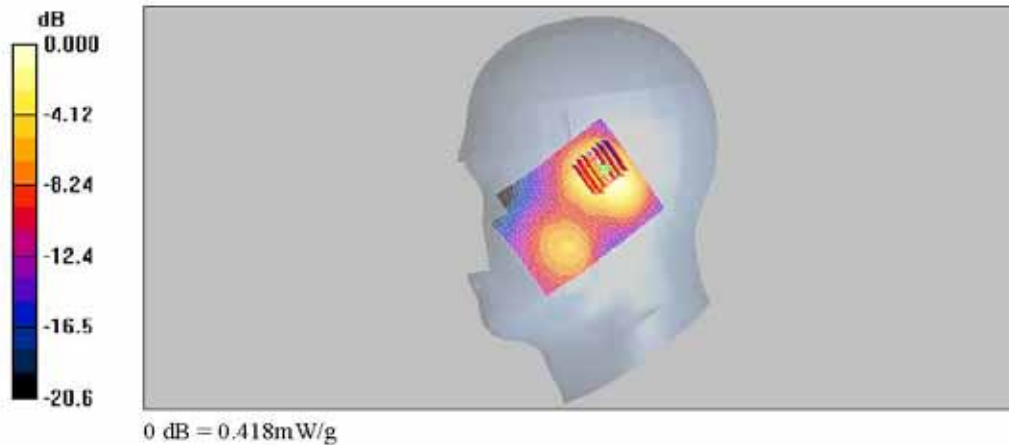

PCS1900 Body SAR Test

Date/Time: 2010-11-11 6:41:59

Test Laboratory: SGS Testing Korea
 File Name: [GPRS1900_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS_Body


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.233 mW/g

GPRS1900_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.3 V/m; Power Drift = -0.090 dB
 Peak SAR (extrapolated) = 0.289 W/kg
 SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.126 mW/g
 Maximum value of SAR (measured) = 0.224 mW/g

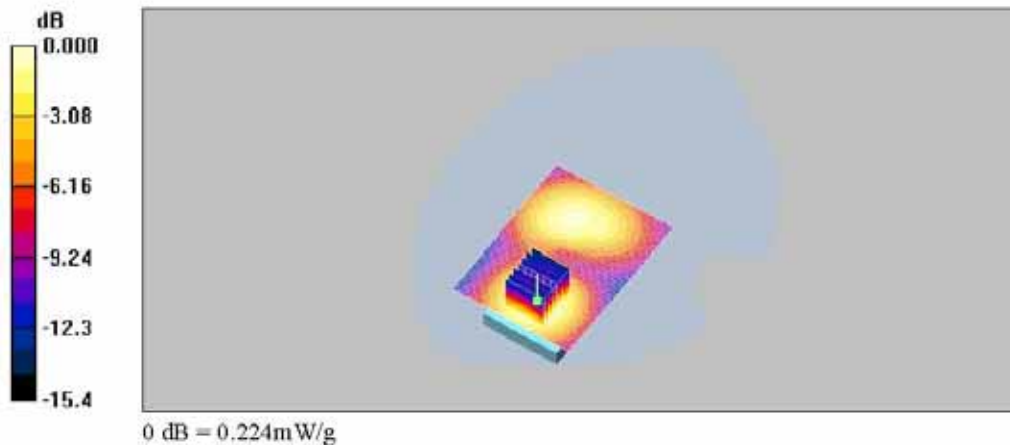

Date/Time: 2010-11-11 7:08:31

Test Laboratory: SGS Testing Korea
File Name: [GPRS1900_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: PCS_Body


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.230 mW/g

GPRS1900_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.9 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 0.302 W/kg
SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.129 mW/g
Maximum value of SAR (measured) = 0.232 mW/g

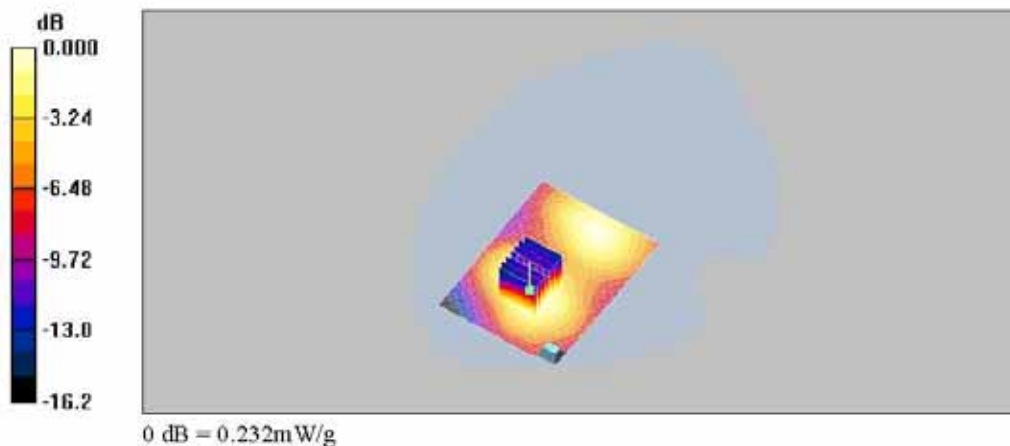

Date/Time: 2010-12-01 2:41:50

Test Laboratory: SGS Testing Korea
 File Name: [GPRS1900_2Tx_Body.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS_Body

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900_2Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.358 mW/g

GPRS1900_2Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.1 V/m; Power Drift = -0.097 dB
 Peak SAR (extrapolated) = 0.454 W/kg
 SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.196 mW/g
 Maximum value of SAR (measured) = 0.352 mW/g

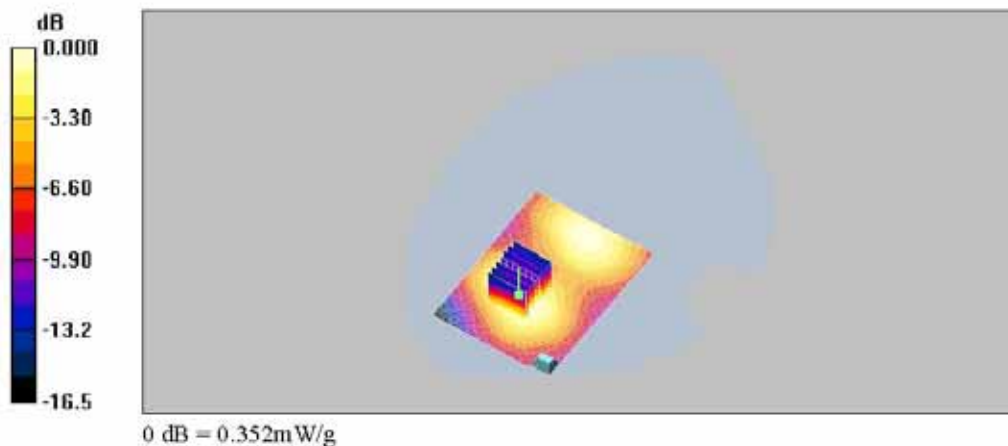

Date/Time: 2010-12-01 3:16:02

Test Laboratory: SGS Testing Korea
 File Name: [GPRS1900_3Tx_Body.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS_Body

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.67
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900_3Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.523 mW/g

GPRS1900_3Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 17.0 V/m; Power Drift = -0.125 dB
 Peak SAR (extrapolated) = 0.653 W/kg
 SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.284 mW/g
 Maximum value of SAR (measured) = 0.514 mW/g

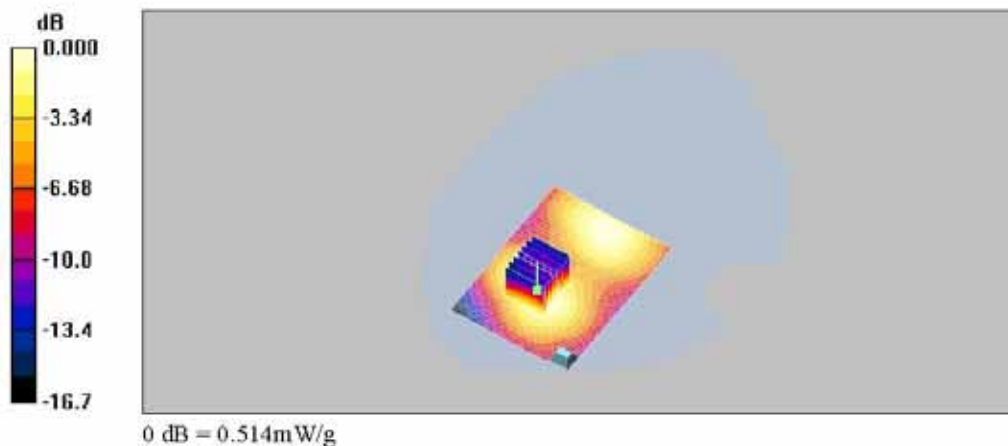

Z Scan

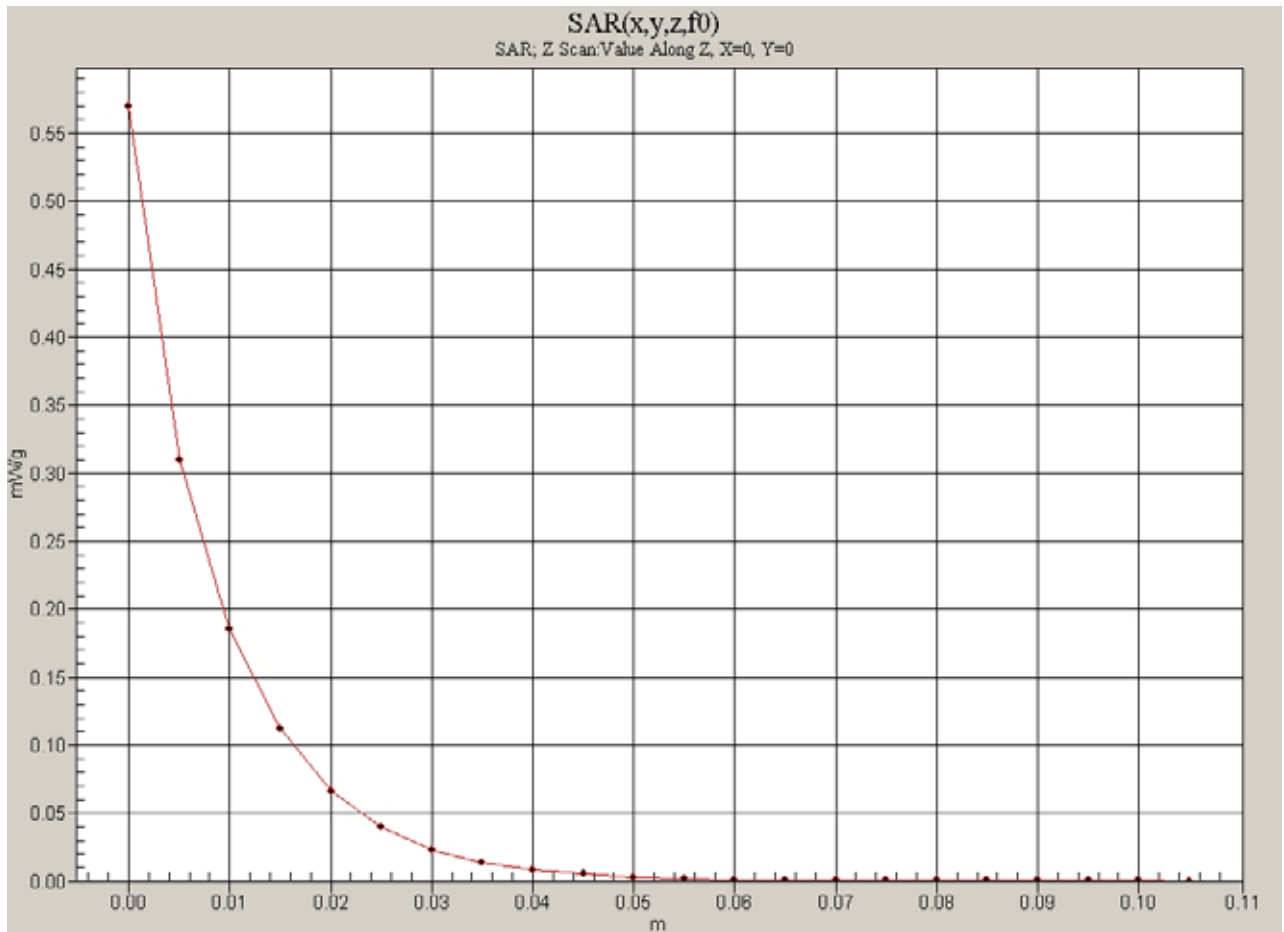

Date/Time: 2010-12-01 3:47:32

Test Laboratory: SGS Testing Korea
 File Name: [GPRS1900_4Tx_Body.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS_Body

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900_4Tx_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.421 mW/g

GPRS1900_4Tx_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 15.3 V/m; Power Drift = -0.026 dB
 Peak SAR (extrapolated) = 0.553 W/kg
 SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.237 mW/g
 Maximum value of SAR (measured) = 0.425 mW/g

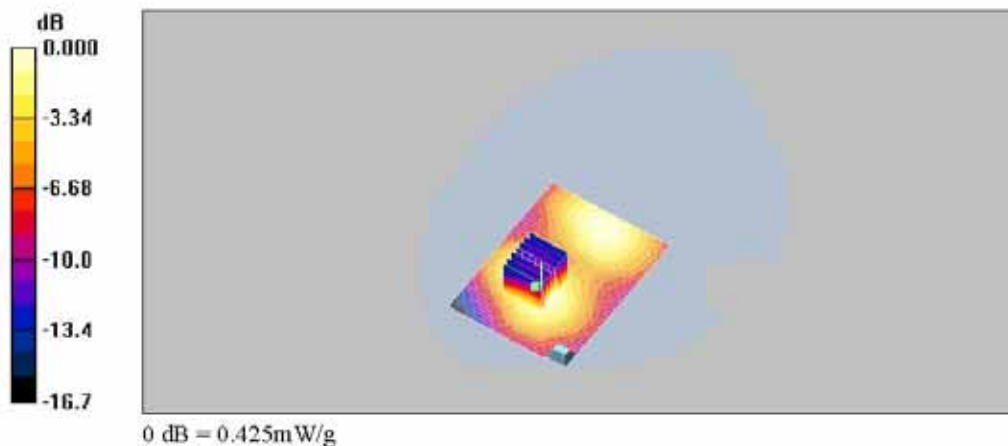

Date/Time: 2010-11-11 7:49:37

Test Laboratory: SGS Testing Korea
 File Name: [PCSI900_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: PCS_Body


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

PCSI900_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.186 mW/g

PCSI900_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.60 V/m; Power Drift = -0.017 dB
 Peak SAR (extrapolated) = 0.237 W/kg
 SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.105 mW/g
 Maximum value of SAR (measured) = 0.184 mW/g

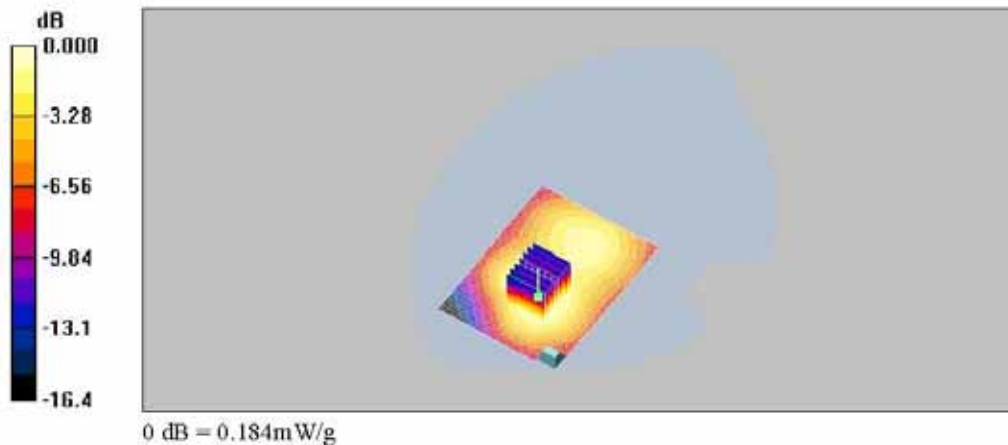

WCDMA V Head SAR Test

Date/Time: 2010-11-10 1:38:25

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_V_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_V_Head


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.523 mW/g

LE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.67 V/m; Power Drift = -0.078 dB
 Peak SAR (extrapolated) = 0.615 W/kg
SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.354 mW/g
 Maximum value of SAR (measured) = 0.528 mW/g

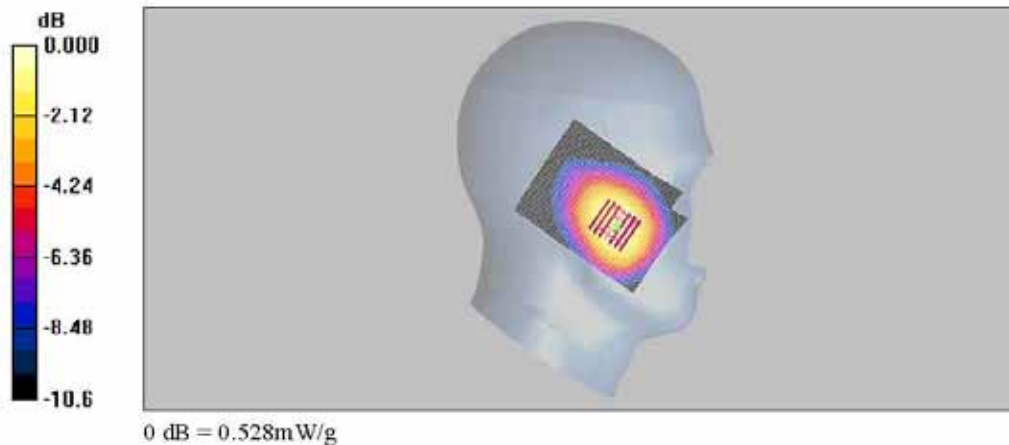

Z Scan

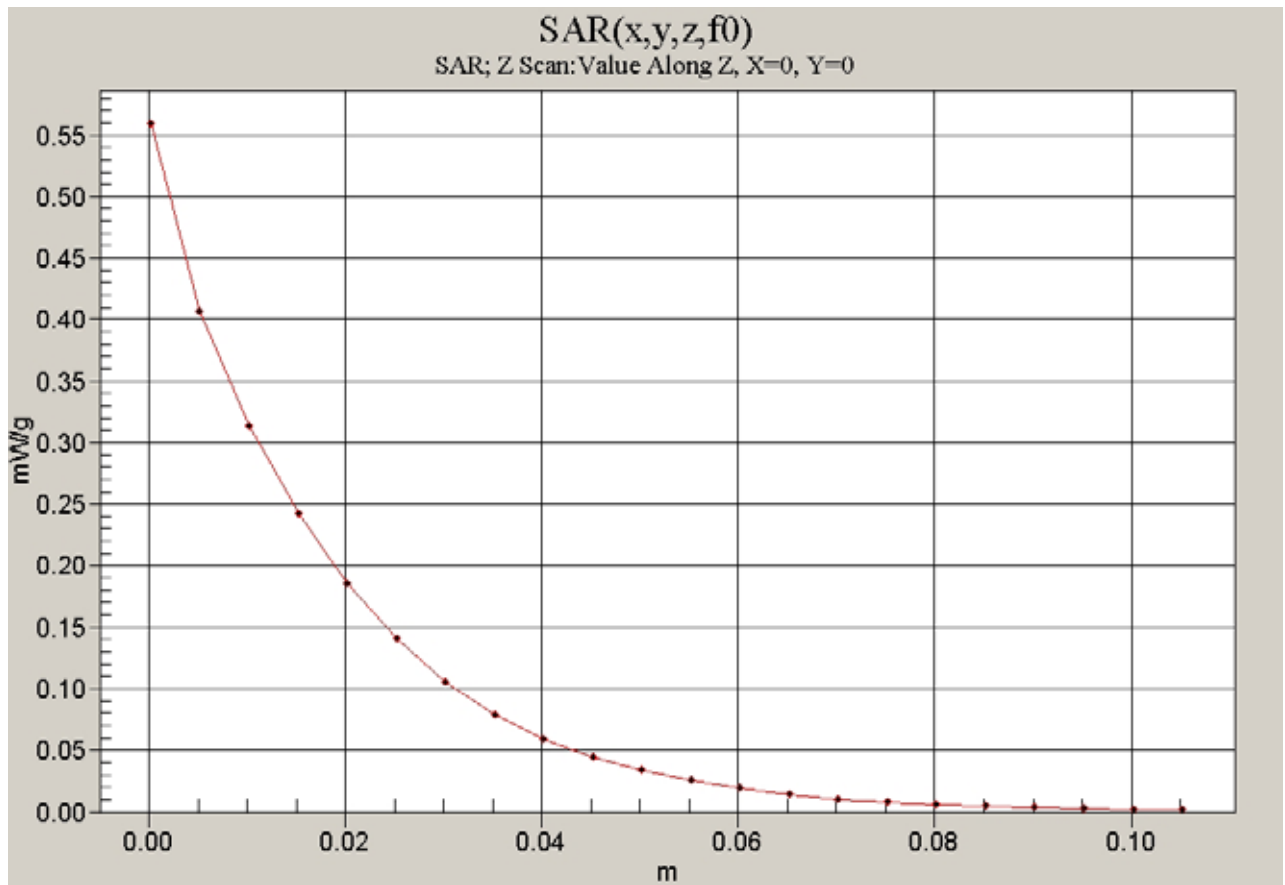

Date/Time: 2010-11-10 2:04:31

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_V_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_V_Head


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.291 mW/g

LE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.3 V/m; Power Drift = -0.169 dB
 Peak SAR (extrapolated) = 0.338 W/kg
SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.197 mW/g
 Maximum value of SAR (measured) = 0.281 mW/g

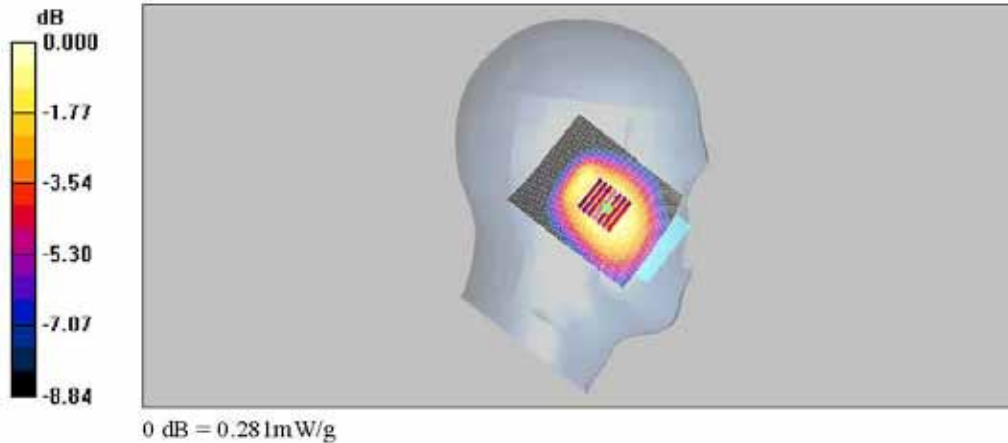

Date/Time: 2010-11-10 2:35:40

Test Laboratory: SGS Testing Korea
File Name: [WCDMA_V_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WCDMA_V_Head


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.463 mW/g

RE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.35 V/m; Power Drift = -0.175 dB
Peak SAR (extrapolated) = 0.573 W/kg
SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.298 mW/g
Maximum value of SAR (measured) = 0.442 mW/g

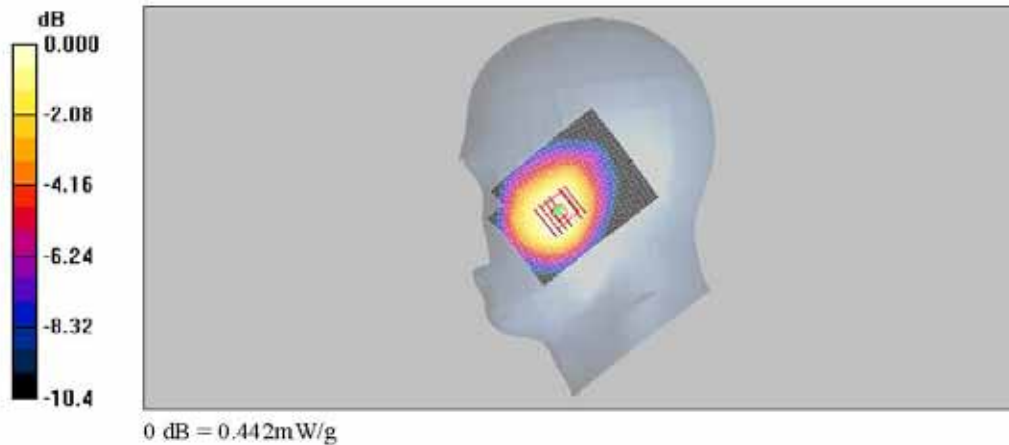

Date/Time: 2010-11-10 2:58:24

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_V_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_V_Head


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.26, 6.26, 6.26); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.288 mW/g

RE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.7 V/m; Power Drift = -0.094 dB
 Peak SAR (extrapolated) = 0.338 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.195 mW/g
 Maximum value of SAR (measured) = 0.280 mW/g

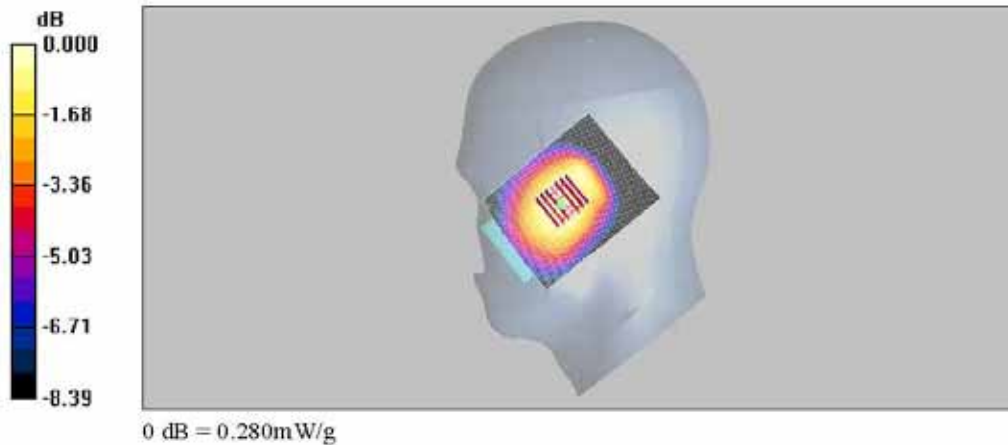

WCDMA V Body SAR Test

Date/Time: 2010-11-10 5:13:20

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA V_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA V_Body


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.259 mW/g

Body_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.05 V/m; Power Drift = -0.121 dB
 Peak SAR (extrapolated) = 0.303 W/kg
 SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.171 mW/g
 Maximum value of SAR (measured) = 0.249 mW/g

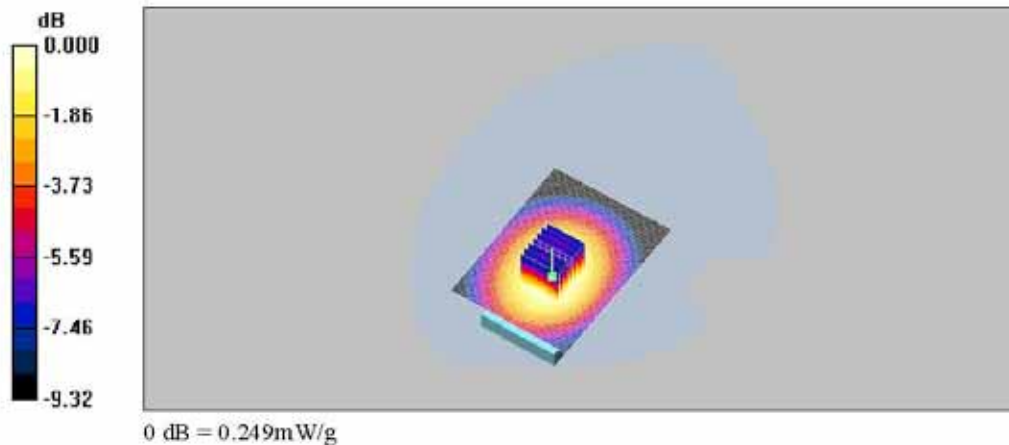

Date/Time: 2010-11-10 5:36:33

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA V_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA V_Body


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.946 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.404 mW/g

Body_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.1 V/m; Power Drift = 0.115 dB
 Peak SAR (extrapolated) = 0.500 W/kg
SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.265 mW/g
 Maximum value of SAR (measured) = 0.395 mW/g

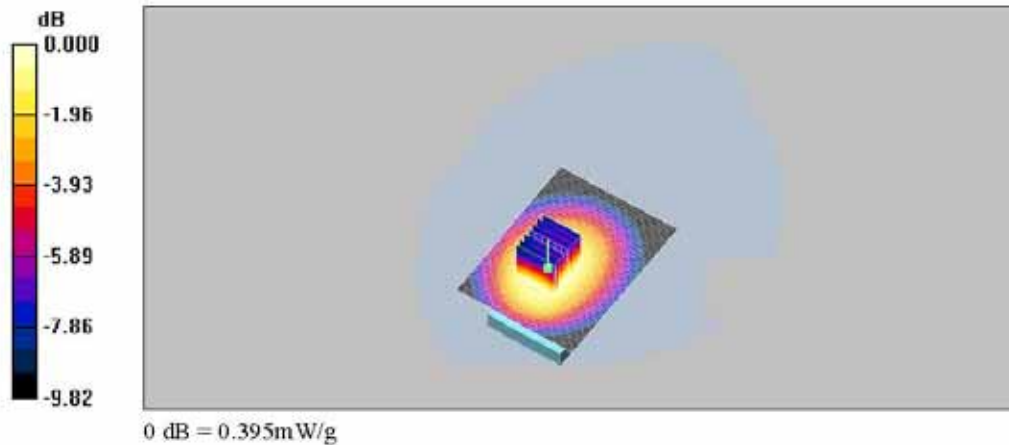

Z Scan

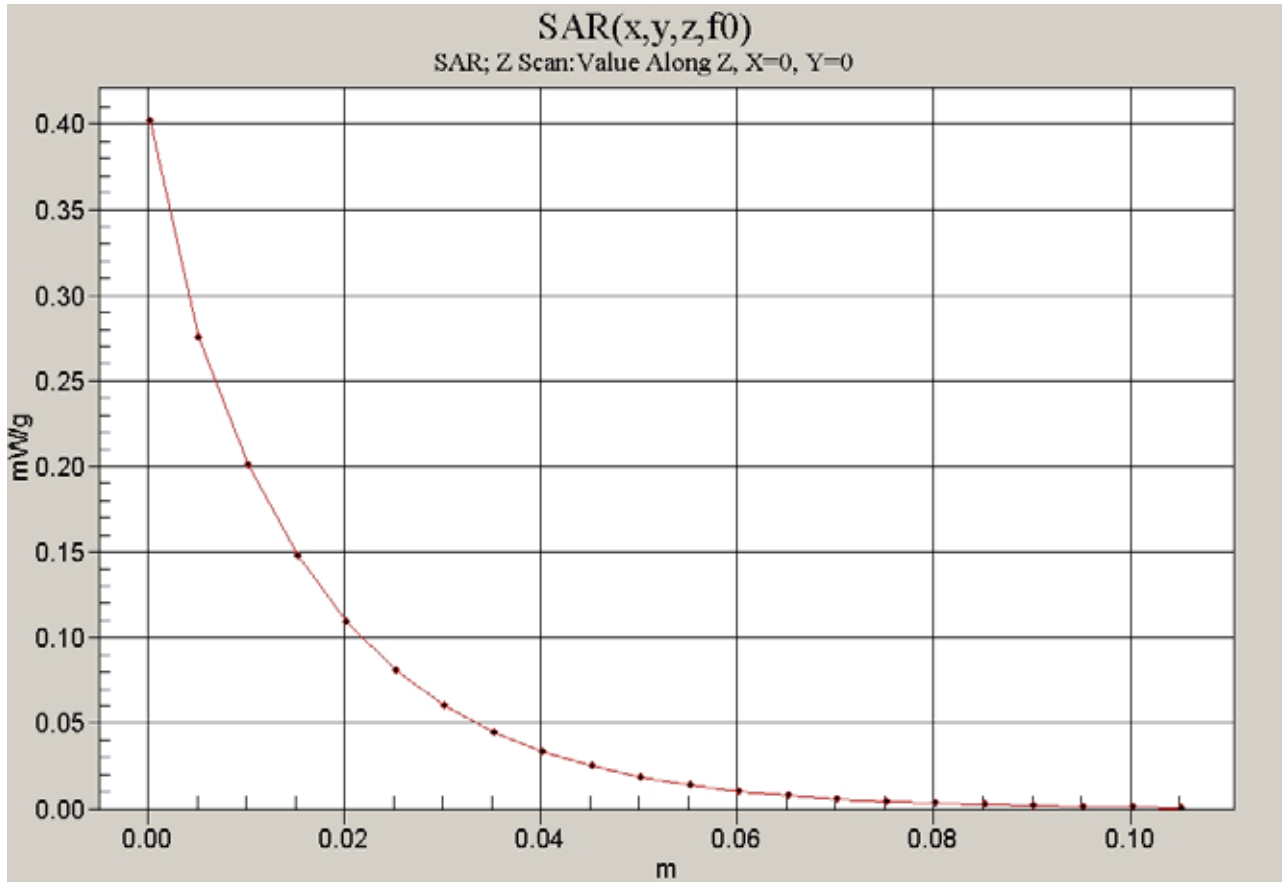

Date/Time: 2010-11-10 6:08:12

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA V_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA V_Body


Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.11, 6.11, 6.11); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_HSDPA_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.265 mW/g

Body_HSDPA_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.64 V/m; Power Drift = -0.036 dB
 Peak SAR (extrapolated) = 0.334 W/kg
 SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.180 mW/g
 Maximum value of SAR (measured) = 0.267 mW/g

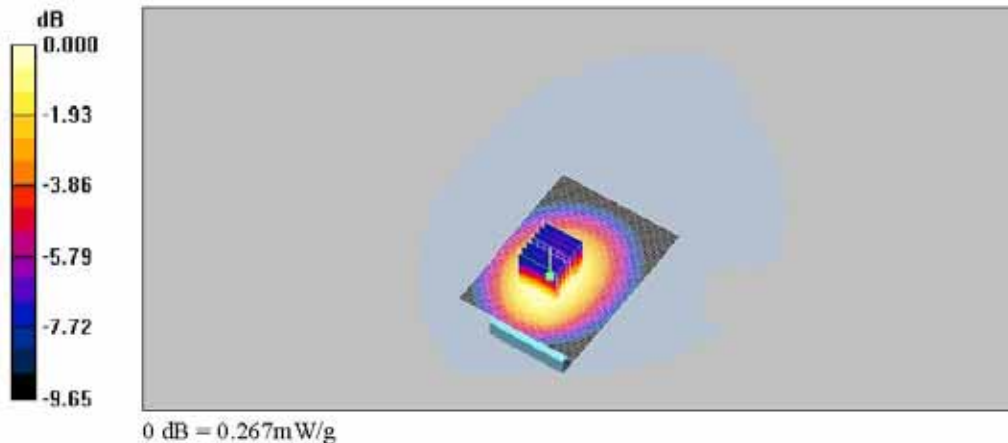

WCDMA II Head SAR Test

Date/Time: 2010-11-11 1:23:13

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.970 mW/g

LE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.1 V/m; Power Drift = -0.188 dB
 Peak SAR (extrapolated) = 1.07 W/kg
 SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.492 mW/g
 Maximum value of SAR (measured) = 0.829 mW/g

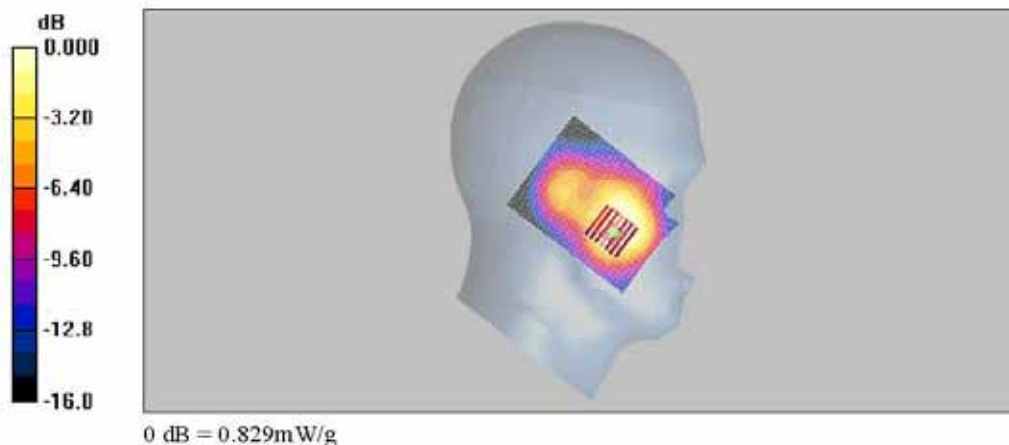

Date/Time: 2010-11-11 1:45:07

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.568 mW/g

LE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 18.1 V/m; Power Drift = 0.114 dB
 Peak SAR (extrapolated) = 0.647 W/kg
SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.276 mW/g
 Maximum value of SAR (measured) = 0.480 mW/g

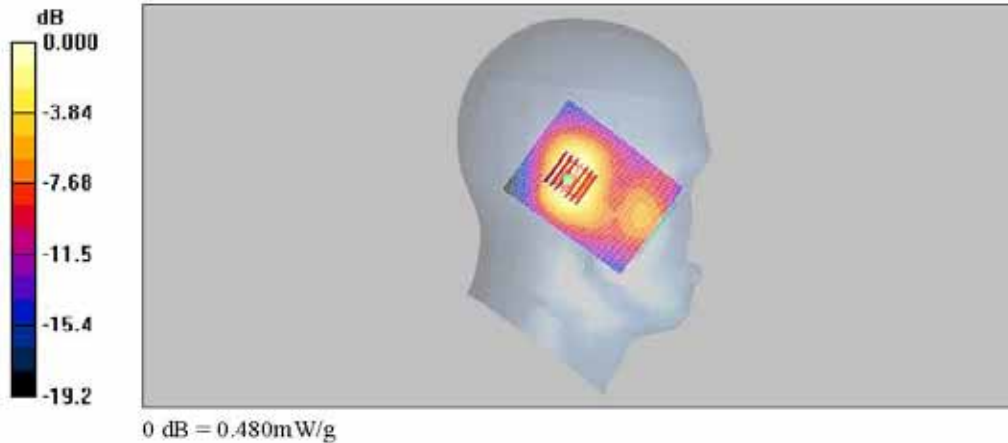

Date/Time: 2010-11-11 2:36:34

Test Laboratory: SGS Testing Korea
File Name: [WCDMA_II_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Low_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.28 mW/g

RE_Low_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.2 V/m; Power Drift = 0.014 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.571 mW/g
Maximum value of SAR (measured) = 1.04 mW/g

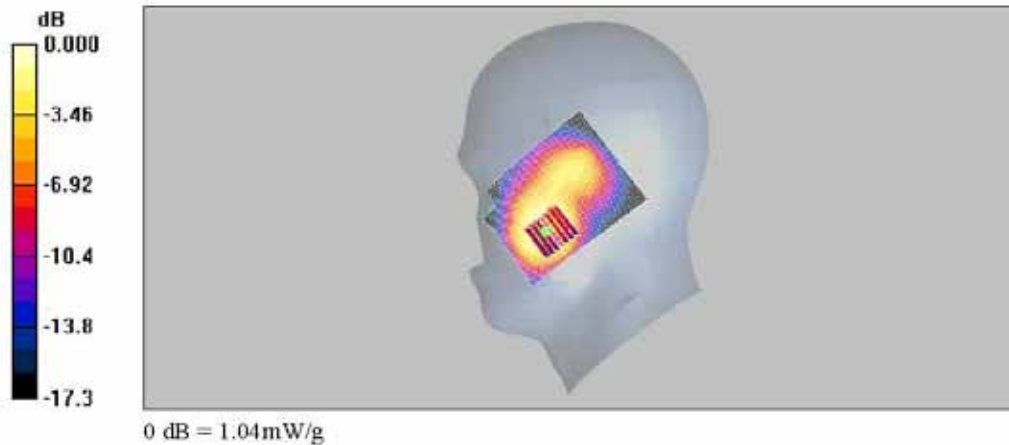

Date/Time: 2010-11-11 2:11:02

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Cheek/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.30 mW/g

RE_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.1 V/m; Power Drift = 0.191 dB
 Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.682 mW/g
 Maximum value of SAR (measured) = 1.26 mW/g

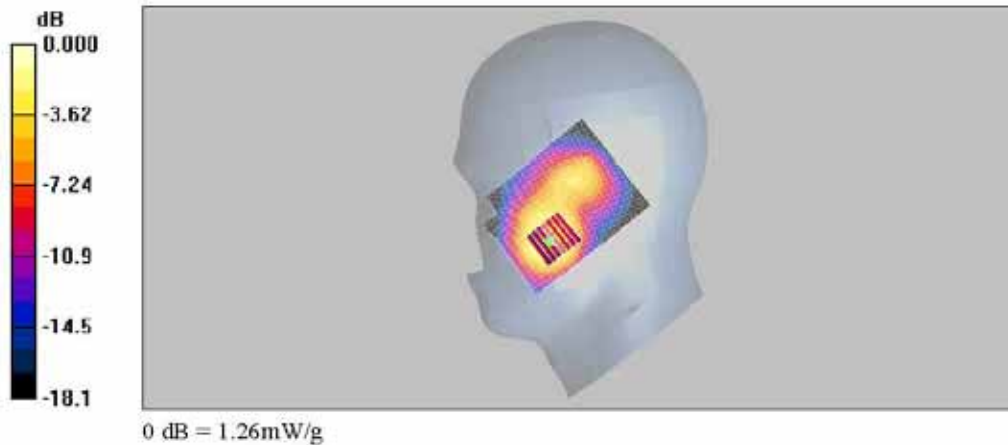

Z Scan

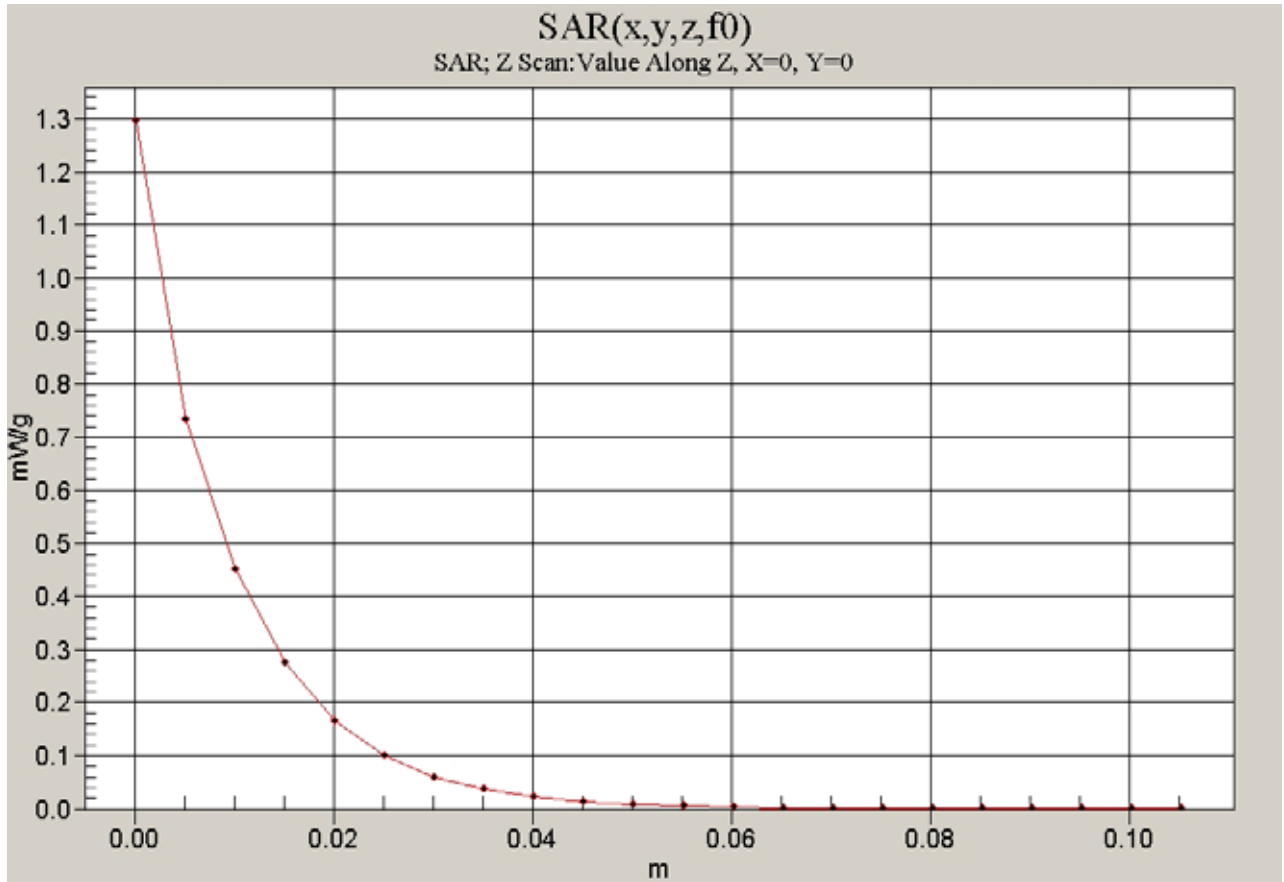

Date/Time: 2010-11-11 3:02:00

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_High_Check/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.06 mW/g

RE_High_Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.7 V/m; Power Drift = 0.079 dB
 Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.570 mW/g
 Maximum value of SAR (measured) = 1.07 mW/g

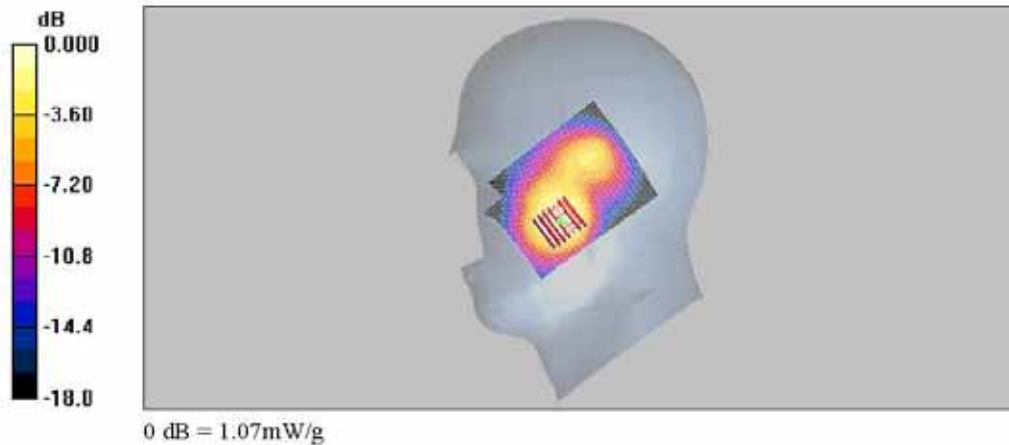

Date/Time: 2010-11-11 3:29:47

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_RE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Head


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(5.04, 5.04, 5.04); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_Mid_Tilt/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.793 mW/g

RE_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.3 V/m; Power Drift = 0.056 dB
 Peak SAR (extrapolated) = 0.867 W/kg
SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.344 mW/g
 Maximum value of SAR (measured) = 0.626 mW/g

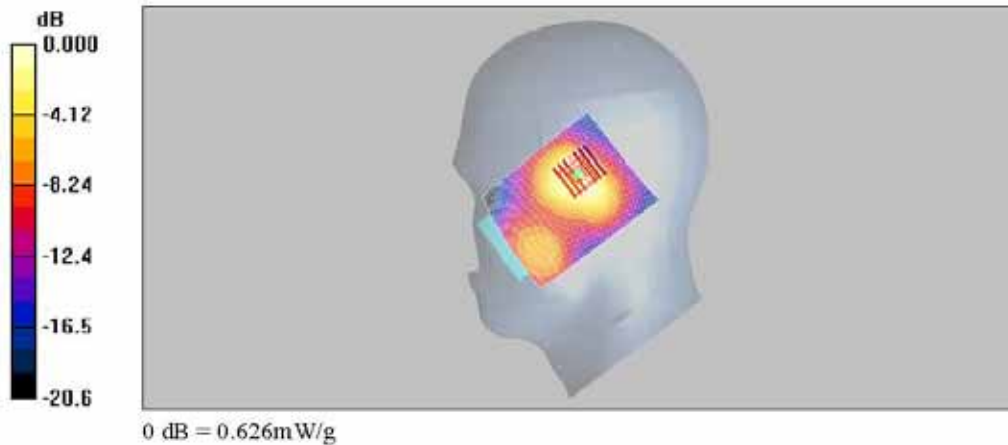

WCDMA II Body SAR Test

Date/Time: 2010-11-11 5:06:14

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Body


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.331 mW/g

Body_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.1 V/m; Power Drift = 0.112 dB
 Peak SAR (extrapolated) = 0.421 W/kg
 SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.186 mW/g
 Maximum value of SAR (measured) = 0.327 mW/g

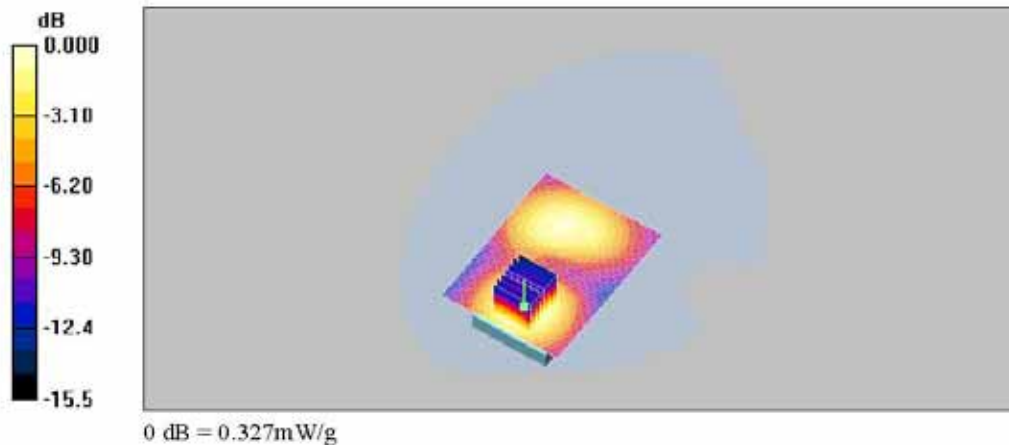

Z Scan

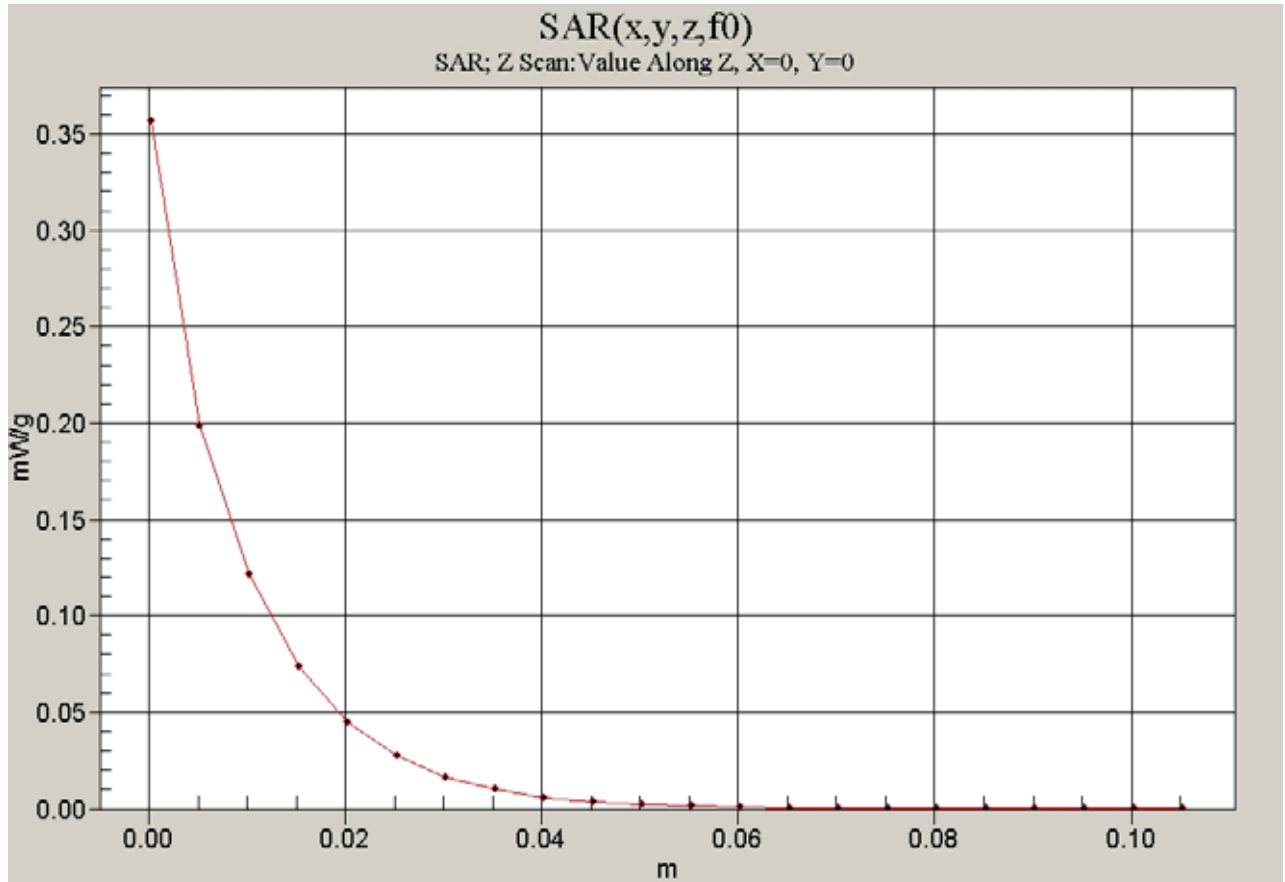

Date/Time: 2010-11-11 5:36:00

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Body


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.313 mW/g

Body_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.5 V/m; Power Drift = 0.087 dB
 Peak SAR (extrapolated) = 0.407 W/kg
 SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.179 mW/g
 Maximum value of SAR (measured) = 0.317 mW/g

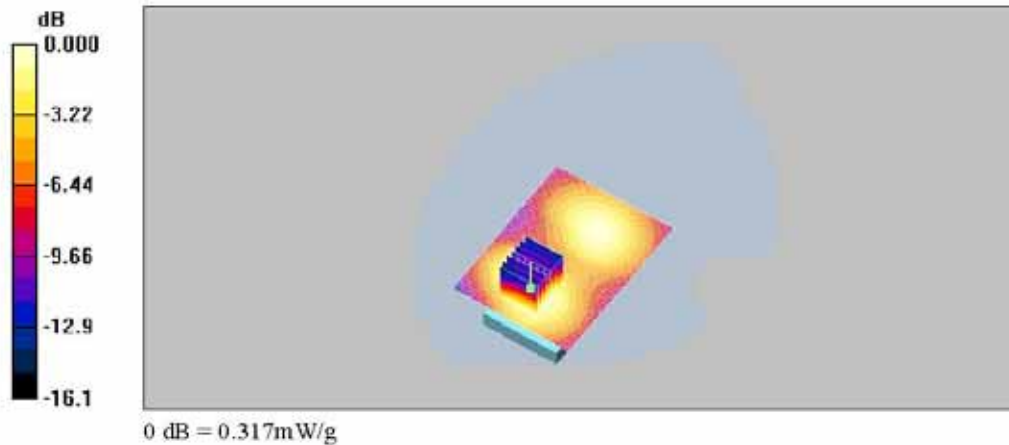

Date/Time: 2010-11-11 6:03:19

Test Laboratory: SGS Testing Korea
 File Name: [WCDMA_II_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WCDMA_Body


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.46, 4.46, 4.46); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_HSDPA_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.222 mW/g

Body_HSDPA_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.81 V/m; Power Drift = 0.098 dB
 Peak SAR (extrapolated) = 0.292 W/kg
 SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.126 mW/g
 Maximum value of SAR (measured) = 0.226 mW/g

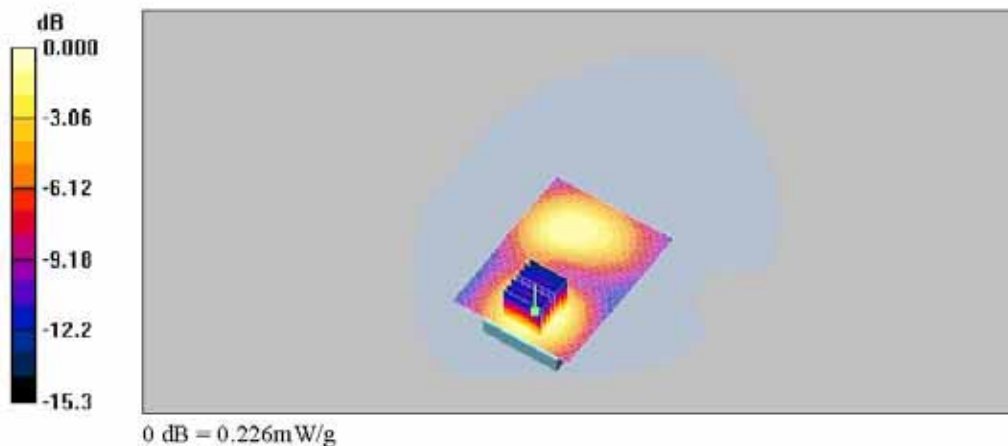

WLAN Head SAR Test

Date/Time: 2010-11-15 11:30:50

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_LE.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Head


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_11b_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.214 mW/g

LE_11b_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.8 V/m; Power Drift = -0.057 dB
 Peak SAR (extrapolated) = 0.380 W/kg
 SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.095 mW/g
 Maximum value of SAR (measured) = 0.196 mW/g

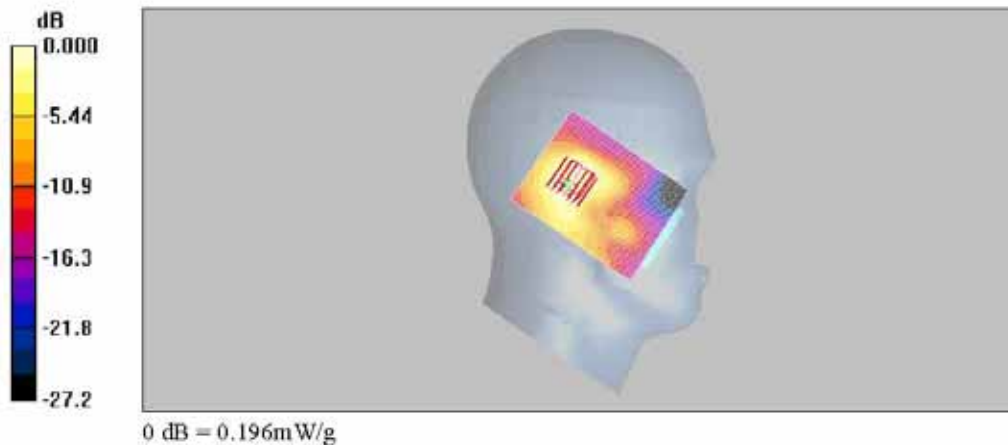

Date/Time: 2010-11-15 11:52:02

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_LE.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Head

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.8 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_11b_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.251 mW/g

LE_11b_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.3 V/m; Power Drift = -0.063 dB
 Peak SAR (extrapolated) = 0.478 W/kg
SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.106 mW/g
 Maximum value of SAR (measured) = 0.231 mW/g

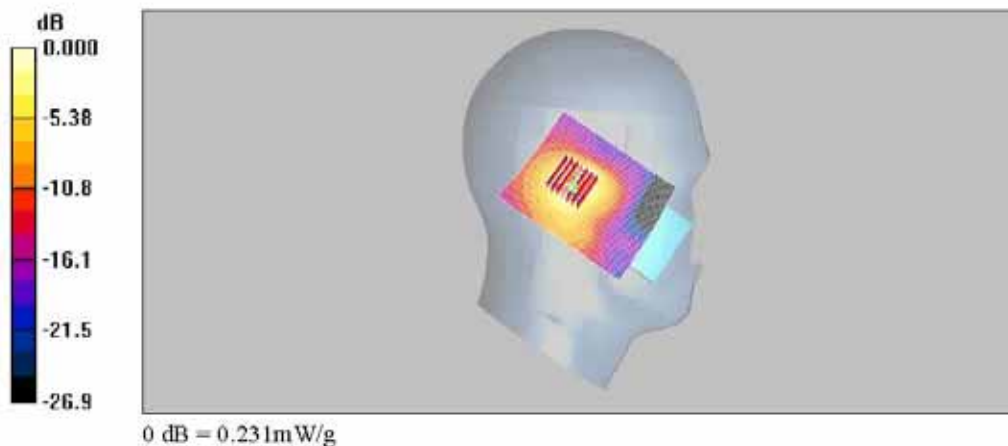

Date/Time: 2010-11-15 1:02:51

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_LE.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Head

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.8 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LE_11g_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.123 mW/g

LE_11g_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.19 V/m; Power Drift = -0.135 dB
 Peak SAR (extrapolated) = 0.233 W/kg
 SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.052 mW/g
 Maximum value of SAR (measured) = 0.115 mW/g

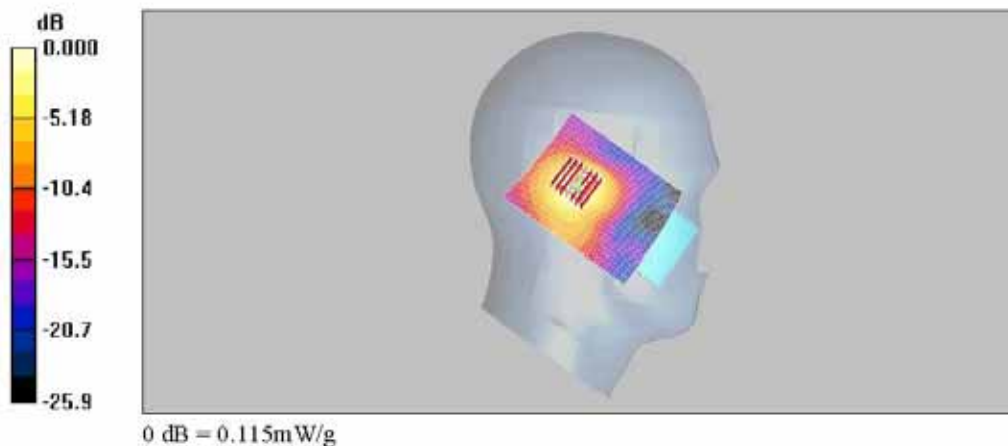

Date/Time: 2010-11-15 3:07:55

Test Laboratory: SGS Testing Korea
File Name: [WLAN_RE.daf](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WLAN_Head


Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_11b_Low_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.315 mW/g

RE_11b_Low_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.1 V/m; Power Drift = 0.119 dB
Peak SAR (extrapolated) = 0.913 W/kg
SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.127 mW/g
Maximum value of SAR (measured) = 0.332 mW/g

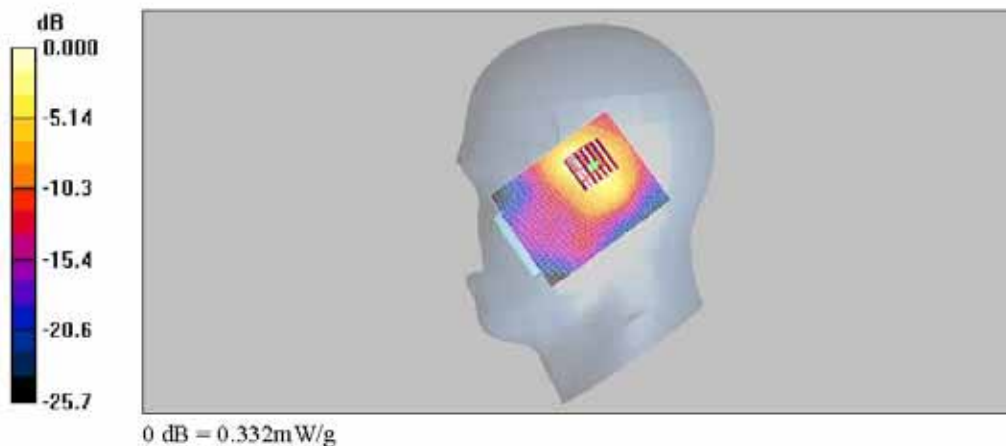

Date/Time: 2010-11-15 1:26:21

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_RE.daf](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Head

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
 Phantom section: Right Section


DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_11b_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.313 mW/g

RE_11b_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.4 V/m; Power Drift = -0.128 dB
 Peak SAR (extrapolated) = 0.977 W/kg
SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.127 mW/g
 Maximum value of SAR (measured) = 0.342 mW/g

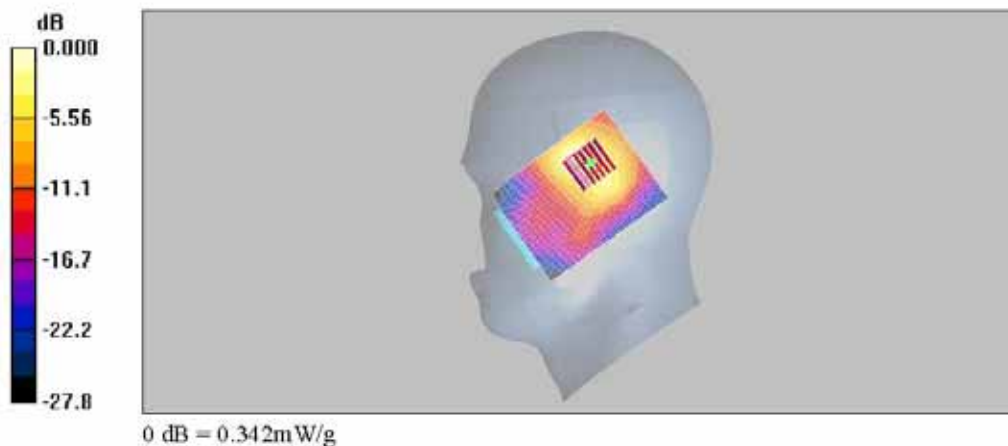

Z Scan

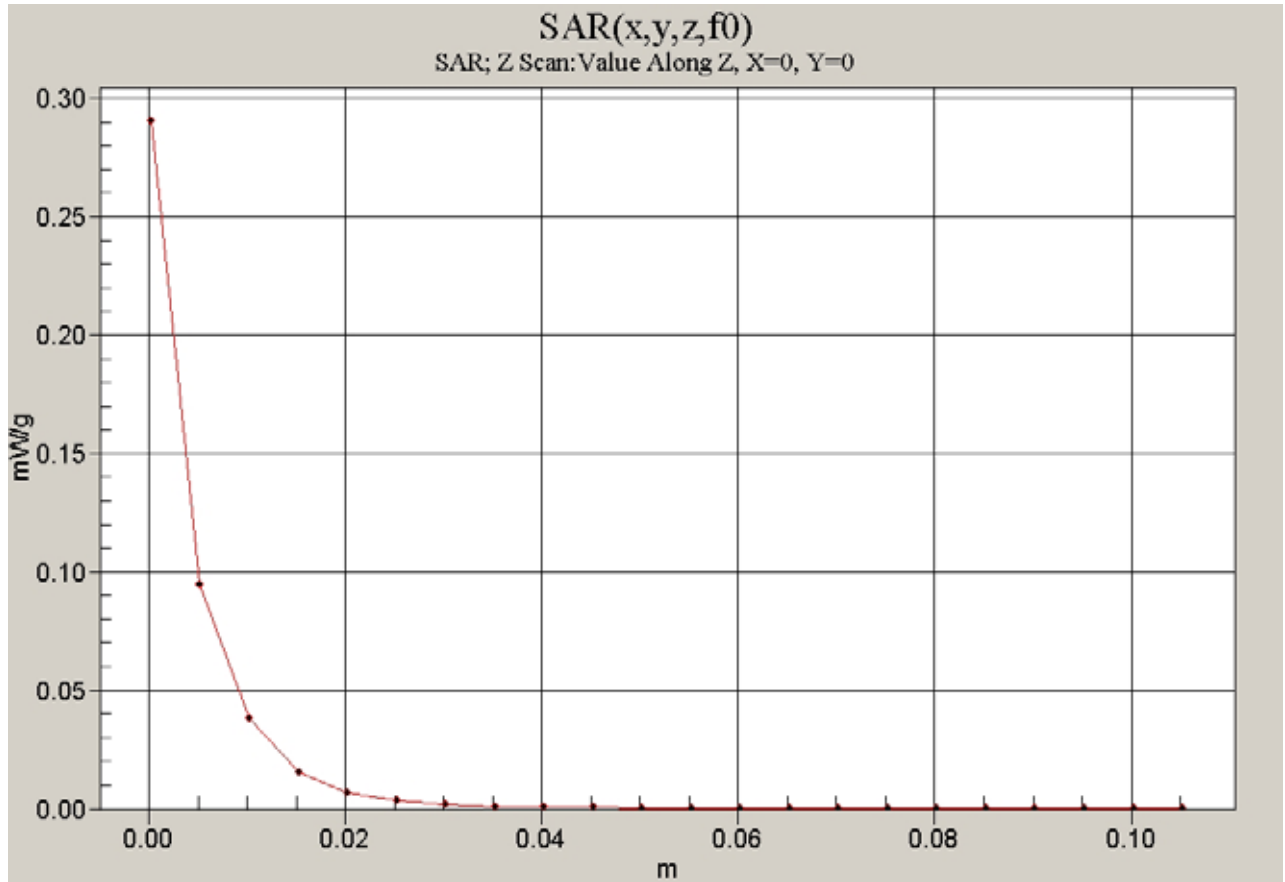

Date/Time: 2010-11-15 3:35:55

Test Laboratory: SGS Testing Korea
File Name: [WLAN_RE.daf](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WLAN_Head

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_11b_High_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.246 mW/g

RE_11b_High_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.94 V/m; Power Drift = -0.066 dB
Peak SAR (extrapolated) = 0.718 W/kg
SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.098 mW/g
Maximum value of SAR (measured) = 0.255 mW/g

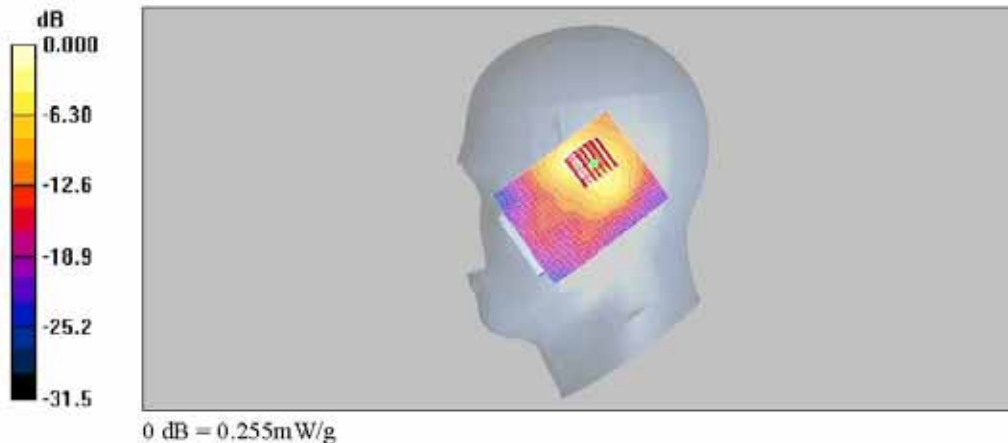

Date/Time: 2010-11-15 2:13:11

Test Laboratory: SGS Testing Korea
File Name: [WLAN_RE.daf](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WLAN_Head


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_11b_Mid_Tilt/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.207 mW/g

RE_11b_Mid_Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.6 V/m; Power Drift = 0.181 dB
Peak SAR (extrapolated) = 0.422 W/kg
SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.095 mW/g
Maximum value of SAR (measured) = 0.214 mW/g

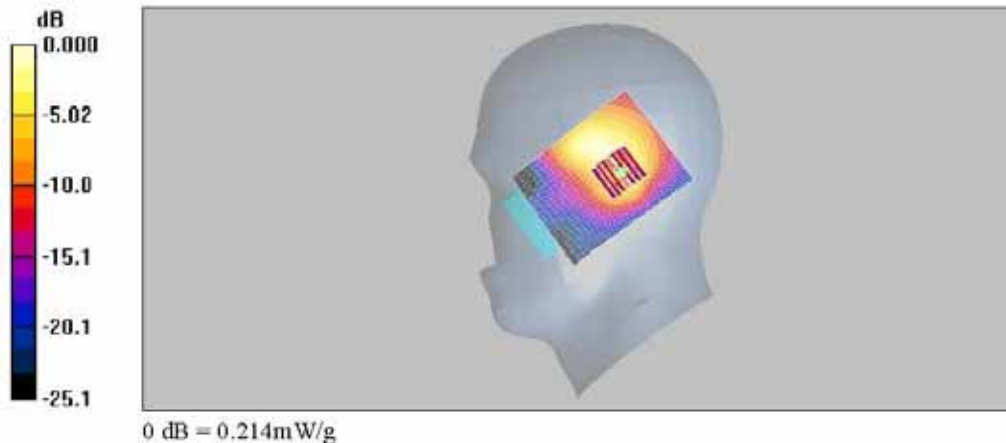

Date/Time: 2010-11-15 2:42:43

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_RE.daf](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Head

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

RE_11g_Mid_Cheek/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.145 mW/g

RE_11g_Mid_Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.26 V/m; Power Drift = 0.065 dB
 Peak SAR (extrapolated) = 0.398 W/kg
 SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.054 mW/g
 Maximum value of SAR (measured) = 0.145 mW/g

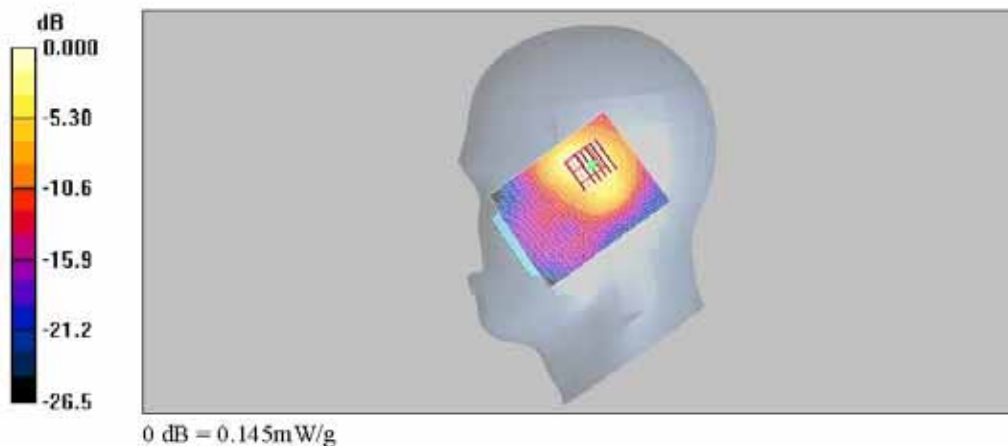

WLAN Body SAR Test

Date/Time: 2010-11-15 5:34:48

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Body


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_11b_Mid_Front/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.070 mW/g

WLAN_11b_Mid_Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.68 V/m; Power Drift = -0.140 dB
 Peak SAR (extrapolated) = 0.151 W/kg
 SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.034 mW/g
 Maximum value of SAR (measured) = 0.067 mW/g

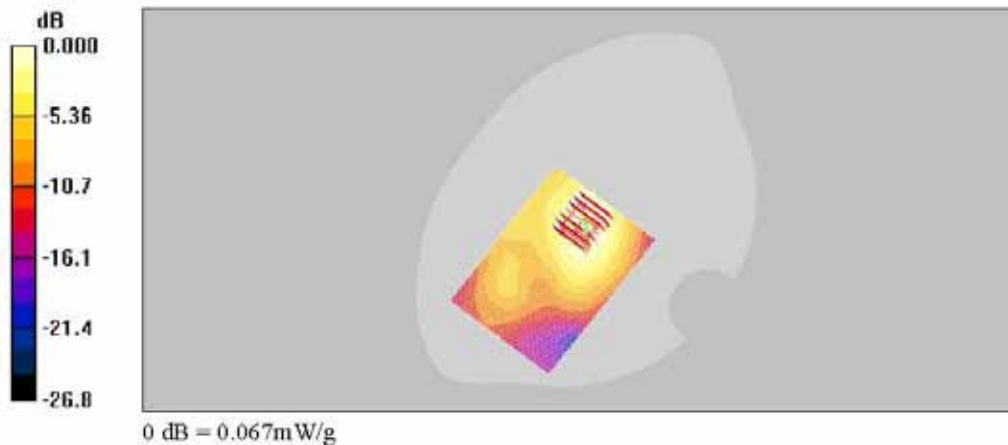

Date/Time: 2010-11-15 6:52:33

Test Laboratory: SGS Testing Korea
File Name: [WLAN_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WLAN_Body


Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_11b_Low_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.073 mW/g

WLAN_11b_Low_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.73 V/m; Power Drift = 0.039 dB
Peak SAR (extrapolated) = 0.147 W/kg
SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.039 mW/g
Maximum value of SAR (measured) = 0.074 mW/g

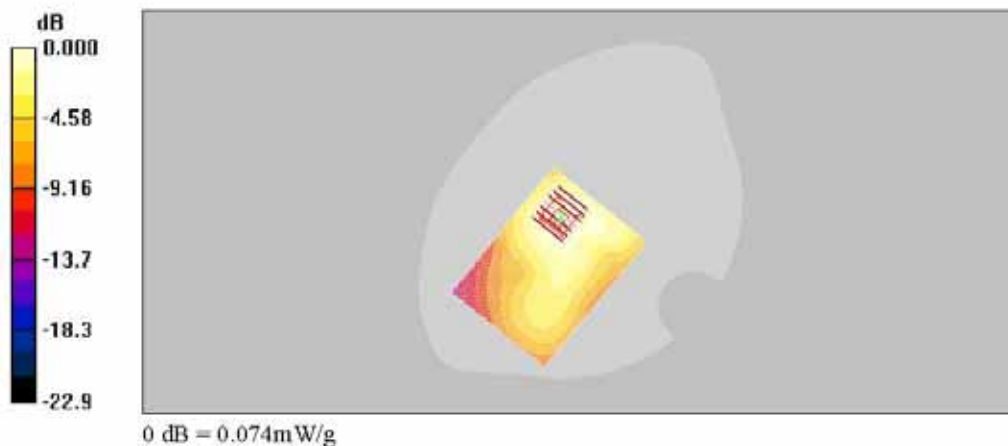

Date/Time: 2010-11-15 5:59:17

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_Body.da4](#)


DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_11b_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.101 mW/g

WLAN_11b_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.45 V/m; Power Drift = 0.053 dB
 Peak SAR (extrapolated) = 0.211 W/kg
 SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.053 mW/g
 Maximum value of SAR (measured) = 0.102 mW/g

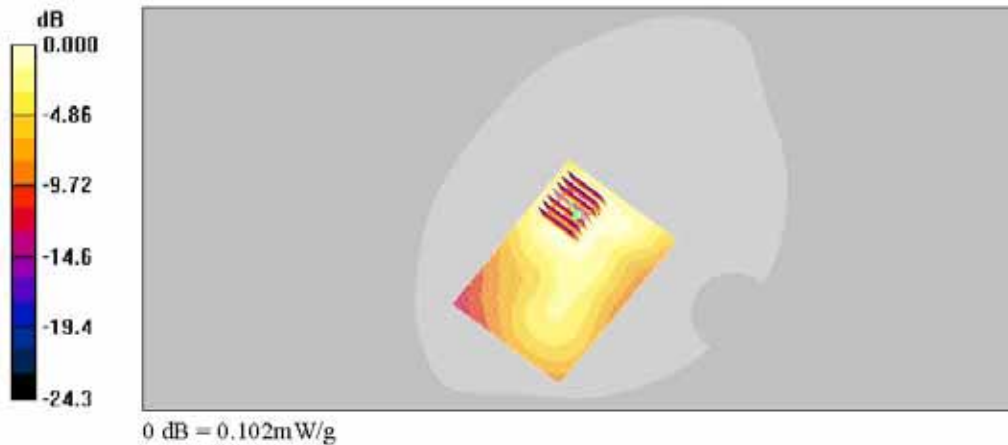

Z Scan

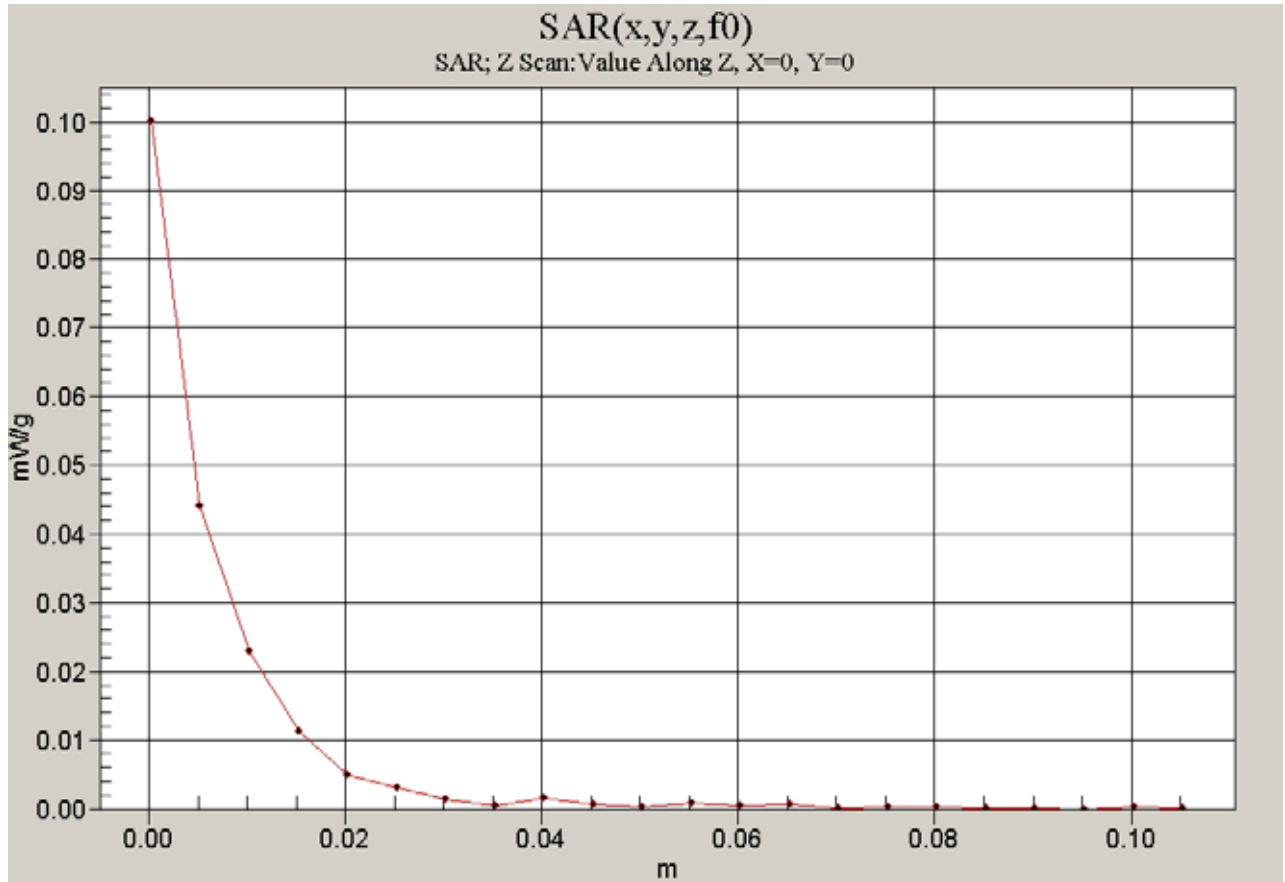

Date/Time: 2010-11-15 7:32:28

Test Laboratory: SGS Testing Korea
File Name: [WLAN_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2009-12-09
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_11b_High_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.068 mW/g

WLAN_11b_High_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.41 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 0.150 W/kg
SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.037 mW/g
Maximum value of SAR (measured) = 0.070 mW/g



Date/Time: 2010-11-15 6:27:24

Test Laboratory: SGS Testing Korea
 File Name: [WLAN_Body.da4](#)

DUT: LG-T325g; Type: Bar; Serial: 001KPTM845121
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: ET3DV6 - SN1782; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-04-28
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2009-12-09
 - Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_11g_Mid_Back/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.044 mW/g

WLAN_11g_Mid_Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.19 V/m; Power Drift = 0.015 dB
 Peak SAR (extrapolated) = 0.097 W/kg
 SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.022 mW/g
 Maximum value of SAR (measured) = 0.043 mW/g



Appendix B

Uncertainty Analysis

a	b	c	d	e = f(d,k)	g	i = cxg/e	k
Uncertainty Component	Section in P1528	Tol (%)	Prob. Dist.	Div.	Ci (1g)	1g _{ui} (%)	Vi (Veff)
Probe calibration	E.2.1	6.3	N	1	1	6.30	
Axial isotropy	E.2.2	0.5	R	1.73	0.71	0.20	
hemispherical isotropy	E.2.2	2.6	R	1.73	0.71	1.06	
Boundary effect	E.2.3	0.8	R	1.73	1	0.46	
Linearity	E.2.4	0.6	R	1.73	1	0.35	
System detection limit	E.2.5	0.25	R	1.73	1	0.14	
Readout electronics	E.2.6	0.3	N	1	1	0.30	
Response time	E.2.7	0	R	1.73	1	0.00	
Integration time	E.2.8	2.6	R	1.73	1	1.50	
RF ambient Condition -Noise	E.6.1	3	R	1.73	1	1.73	
RF ambient Condition - reflections	E.6.1	3	R	1.73	1	1.73	
Probe positioning - mechanical tolerance	E.6.2	1.5	R	1.73	1	0.87	
Probe positioning - with respect to phantom	E.6.3	2.9	R	1.73	1	1.67	
Max. SAR evaluation	E.5.2	1	R	1.73	1	0.58	
Test sample positioning	E.4.2	2.3	N	1	1	2.30	9
Device holder uncertainty	E.4.1	3.6	N	1	1	3.60	
Output power variation -SAR drift measurement	6.62	5	R	1.73	1	2.89	
Phantom uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	2.31	
Liquid conductivity - deviation from target values	E.3.2	5	R	1.73	0.64	1.85	
Liquid conductivity - measurement uncertainty	E.3.2	1.2	N	1	0.64	0.77	5
Liquid permittivity - deviation from target values	E.3.3	5	R	1.73	0.6	1.73	
Liquid permittivity - measurement uncertainty	E.3.3	1.1	N	1	0.6	0.66	5
Combined standard uncertainty				RSS		9.63	2754
Expanded uncertainty (95% CONFIDENCE INTERVAL)				K=2		19.27	



Appendix C

Calibration Certificate

- PROBE

- DAE

- 835 MHz, 1900 MHz, 2450 MHz DIPOLE

- PROBE Calibration Certificate

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS-KES (Dymstec)**

Certificate No: **ET3-1782_Apr10**

CALIBRATION CERTIFICATE																																																			
Object	ET3DV6 - SN:1782																																																		
Calibration procedure(s)	QA CAL-01.v6, QA CAL-12.v6, QA CAL-23.v3 and QA CAL-25.v2 Calibration procedure for dosimetric E-field probes																																																		
Calibration date:	April 26, 2010																																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>1-Apr-10 (No. 217-01136)</td> <td>Apr-11</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>1-Apr-10 (No. 217-01136)</td> <td>Apr-11</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498057</td> <td>1-Apr-10 (No. 217-01136)</td> <td>Apr-11</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>30-Mar-10 (No. 217-01159)</td> <td>Mar-11</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>30-Mar-10 (No. 217-01161)</td> <td>Mar-11</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>30-Mar-10 (No. 217-01160)</td> <td>Mar-11</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>30-Dec-09 (No. ES3-3013_Dec09)</td> <td>Dec-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 660</td> <td>29-Sep-09 (No. DAE4-660_Sep09)</td> <td>Sep-10</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11	Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11	Power sensor E4412A	MY41498057	1-Apr-10 (No. 217-01136)	Apr-11	Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11	Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11	Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11	Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10	DAE4	SN: 660	29-Sep-09 (No. DAE4-660_Sep09)	Sep-10	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct-10
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11																																																
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11																																																
Power sensor E4412A	MY41498057	1-Apr-10 (No. 217-01136)	Apr-11																																																
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11																																																
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11																																																
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11																																																
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10																																																
DAE4	SN: 660	29-Sep-09 (No. DAE4-660_Sep09)	Sep-10																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct-10																																																
Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 																																																
Approved by:	Name Kajla Pokovic	Function Technical Manager	Signature 																																																
			Issued: April 26, 2010																																																
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1782

April 28, 2010

Probe ET3DV6

SN:1782

Manufactured:	April 15, 2003
Last calibrated:	April 30, 2009
Modified:	April 27, 2010
Recalibrated:	April 28, 2010

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1782

April 28, 2010

DASY - Parameters of Probe: ET3DV6 SN:1782

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	2.01	1.74	1.86	± 10.1%
DCP (mV) ^B	93.9	96.4	91.2	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^C (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	± 1.5%
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6 SN:1782

April 28, 2010

DASY - Parameters of Probe: ET3DV6 SN:1782

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ²	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	6.67	6.67	6.67	0.19	2.19 ± 13.3%
835	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	6.26	6.26	6.26	0.51	2.05 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.30	5.30	5.30	0.53	2.60 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	5.04	5.04	5.04	0.69	2.24 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.48	4.48	4.48	0.99	1.71 ± 11.0%

² The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1782

April 28, 2010

DASY - Parameters of Probe: ET3DV6 SN:1782

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] [Ⓒ]	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	7.53	7.53	7.53	0.15	2.33 ± 13.3%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.11	6.11	6.11	0.42	2.40 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.68	4.68	4.68	0.63	3.03 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.46	4.46	4.46	0.85	2.44 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.07	4.07	4.07	0.99	1.40 ± 11.0%


[Ⓒ] The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1782

April 28, 2010

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


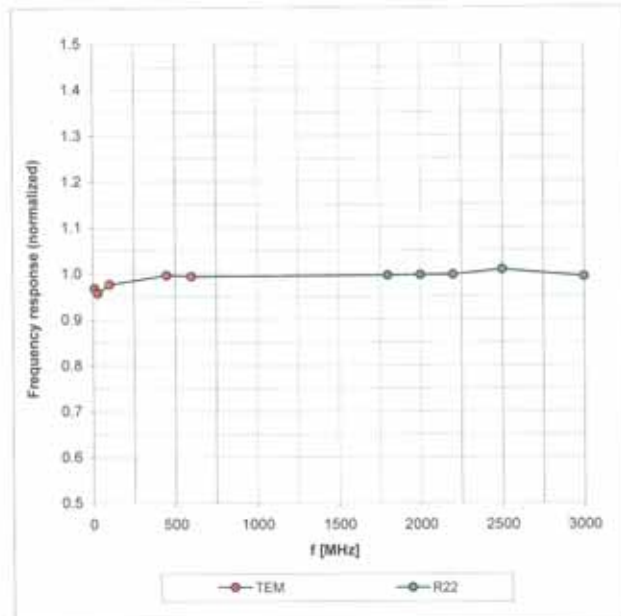


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1782

April 28, 2010

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

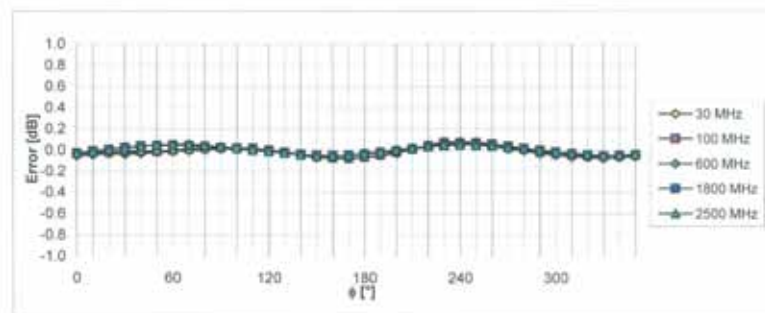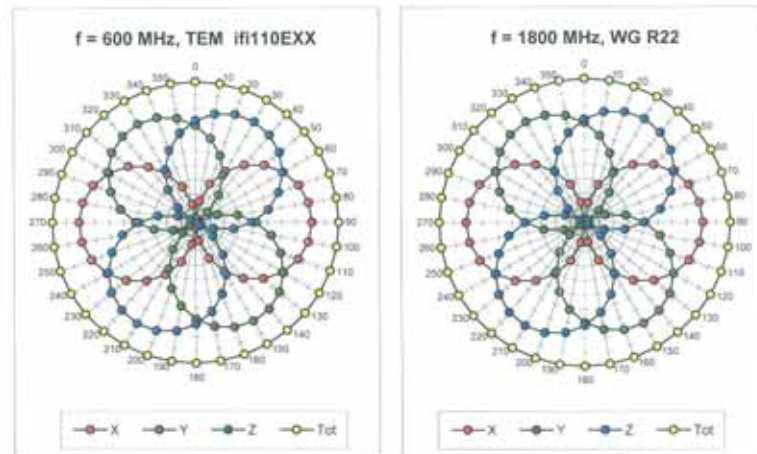


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1782

April 28, 2010

Dynamic Range f(SAR_{head}) (Waveguide R22, f = 1800 MHz)

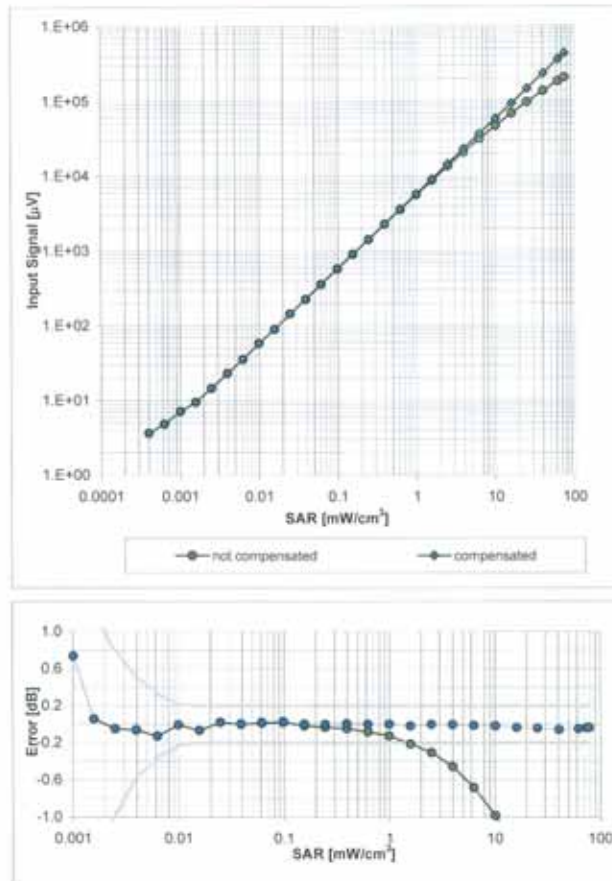


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ET3DV6 SN:1782


April 28, 2010

Conversion Factor Assessment

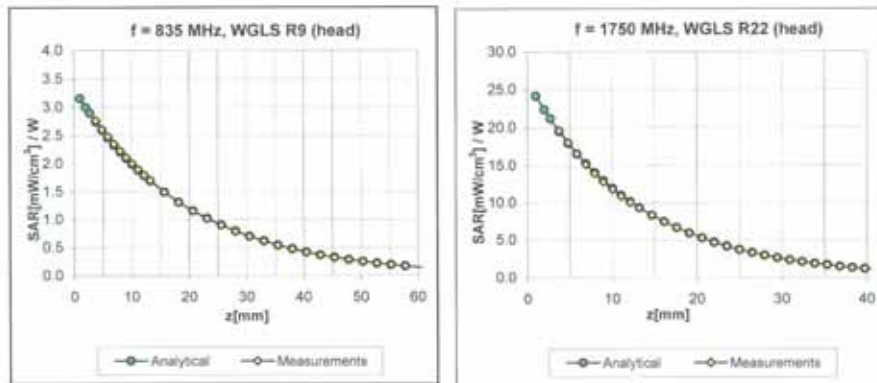

Deviation from Isotropy in HSL

Error (ϕ , θ), f = 900 MHz

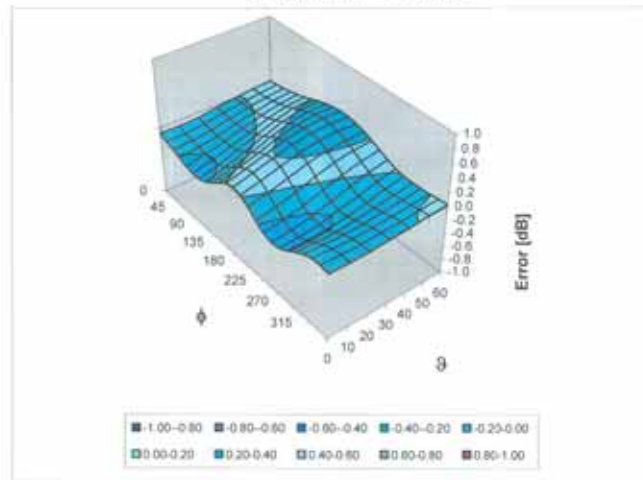

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

ET3DV6 SN:1782

April 28, 2010

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

-DAE Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS KES**

Certificate No: **DAE3-567_Dec09**

CALIBRATION CERTIFICATE

Object: **DAE3 - SD 000 D03 AA - SN: 567**

Calibration procedure(s): **QA CAL-06.v12
 Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **December 9, 2009**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	1-Oct-09 (No: 9055)	Oct-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	05-Jun-09 (in house check)	In house check: Jun-10

Calibrated by: **Dominique Steffen** (Name), **Technician** (Function), *[Signature]* (Signature)

Approved by: **Fin Bornholt** (Name), **R&D Director** (Function), *[Signature]* (Signature)

Issued: December 9, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: **SCS 108**

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal
 High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
 Low Range: 1LSB = 61nV, full range = -1.....+3mV
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.546 \pm 0.1% (k=2)	404.281 \pm 0.1% (k=2)	404.334 \pm 0.1% (k=2)
Low Range	3.96697 \pm 0.7% (k=2)	3.97066 \pm 0.7% (k=2)	3.95911 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	7.5 $^{\circ}$ \pm 1 $^{\circ}$
---	-----------------------------------

Appendix
1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200002.8	-1.89	-0.00
Channel X + Input	19998.11	-1.59	-0.01
Channel X - Input	-19992.89	7.71	-0.04
Channel Y + Input	199957.5	-46.16	-0.02
Channel Y + Input	19992.42	-7.98	-0.04
Channel Y - Input	-19994.34	4.96	-0.02
Channel Z + Input	199931.6	-61.88	-0.03
Channel Z + Input	19990.70	-8.50	-0.04
Channel Z - Input	-19992.89	-0.04	-0.04

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.7	0.61	0.03
Channel X + Input	199.14	-0.86	-0.43
Channel X - Input	-200.82	-0.72	0.36
Channel Y + Input	2000.0	-0.11	-0.01
Channel Y + Input	198.97	-1.13	-0.56
Channel Y - Input	-201.08	-1.18	0.59
Channel Z + Input	1999.4	-0.67	-0.04
Channel Z + Input	198.62	-1.48	-0.74
Channel Z - Input	-201.26	-1.36	0.68

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	3.98	2.30
	-200	-0.74	-2.83
Channel Y	200	-0.27	-0.39
	-200	-0.32	-0.95
Channel Z	200	4.97	4.65
	-200	-6.07	-6.68

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.57	-1.52
Channel Y	200	3.06	-	3.39
Channel Z	200	3.26	-0.28	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16355	16407
Channel Y	16166	16176
Channel Z	15925	16100

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.19	-1.19	0.58	0.37
Channel Y	-0.59	-1.52	0.73	0.36
Channel Z	-1.05	-2.18	-0.05	0.34

6. Input Offset Current

Nominal input circuitry offset current on all channels: <251A

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.2000	203.2
Channel Y	0.1999	202.8
Channel Z	0.1999	201.0

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9

- 835 MHz Dipole Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **SGS KES (Dymstec)**

Certificate No: **D835V2-490_May10**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 490**

Calibration procedure(s): **QA CAL-05.v7
 Calibration procedure for dipole validation kits**

Calibration date: **May 21, 2010**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37460704	08-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	08-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	in house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	in house check: Oct-11
Network Analyzer HP 8753E	US37390585 54206	18-Oct-01 (in house check Oct-09)	in house check: Oct-10

Calibrated by:	Name Jeton Kastrali	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: May 21, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.7 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature during test	(22.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 mW / g
SAR normalized	normalized to 1W	9.68 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.62 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 mW / g
SAR normalized	normalized to 1W	6.32 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.29 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.2 ± 6 %	0.98 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.49 mW / g
SAR normalized	normalized to 1W	10.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.84 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.63 mW / g
SAR normalized	normalized to 1W	6.52 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.47 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.9 Ω - 5.3 $j\Omega$
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.4 Ω - 6.9 $j\Omega$
Return Loss	- 21.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.381 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 19, 2003

DASY5 Validation Report for Head TSL

Date/Time: 21.05.2010 10:57:47

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.1 V/m; Power Drift = 0.00869 dB

Peak SAR (extrapolated) = 3.6 W/kg


SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.8 mW/g

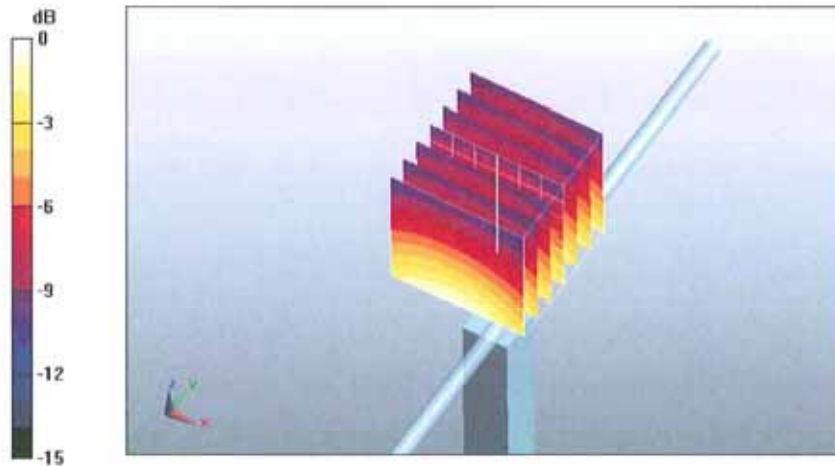

0 dB = 2.8mW/g

Impedance Measurement Plot for Head TSL

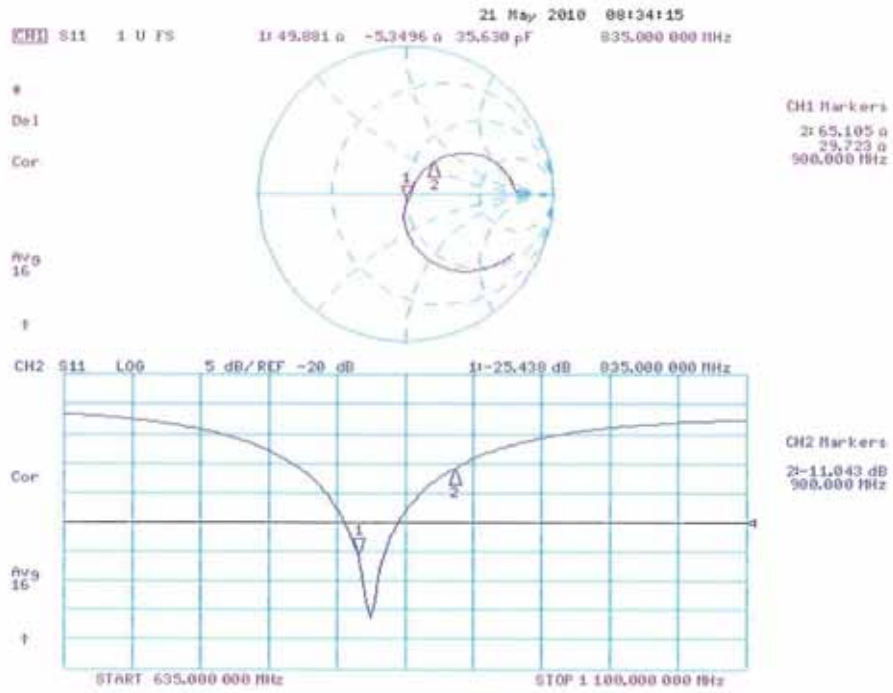

DASY5 Validation Report for Body

Date/Time: 20.05.2010 10:28:20

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium: MSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.000723 dB

Peak SAR (extrapolated) = 3.65 W/kg


SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

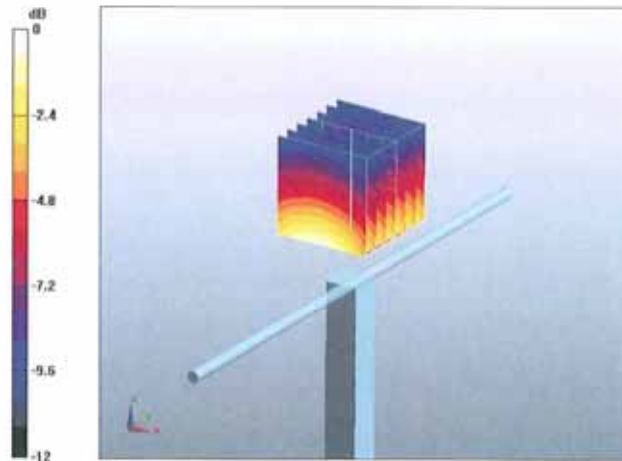

0 dB = 2.89mW/g

Impedance Measurement Plot for Body TSL

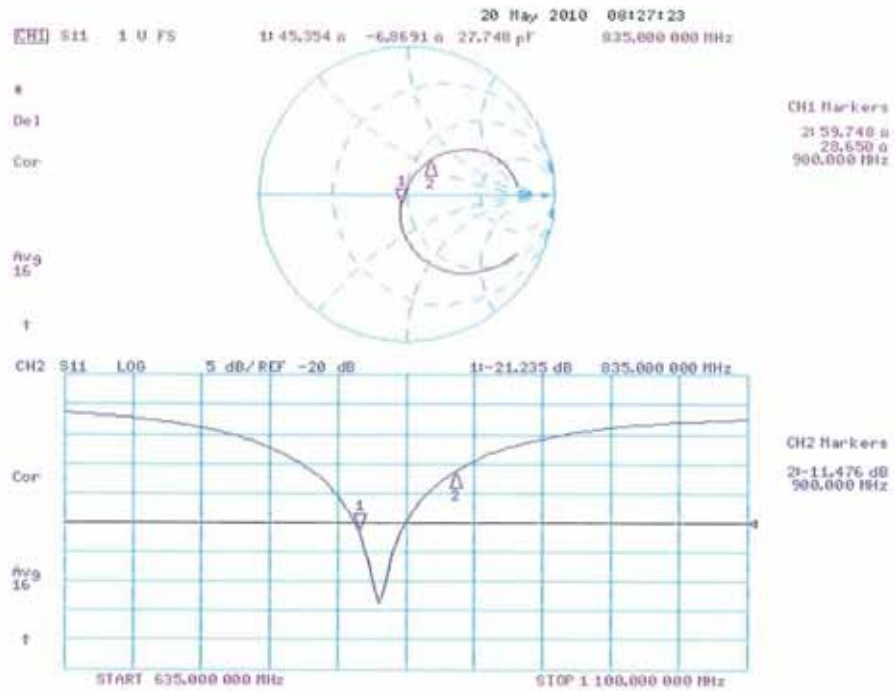

- 1900 MHz Dipole Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS KES (Dymstec)**

Certificate No: **D1900V2-5d033_May10**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d033**

Calibration procedure(s): **QA CAL-05.v7
 Calibration procedure for dipole validation kits**



Calibration date: **May 26, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 27, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.7 \pm 6 %	1.41 mho/m \pm 6 %
Head TSL temperature during test	(21.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.90 mW / g
SAR normalized	normalized to 1W	39.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.4 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.15 mW / g
SAR normalized	normalized to 1W	20.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.5 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	1.52 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	41.3 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.50 mW / g
SAR normalized	normalized to 1W	22.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	22.0 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.5 Ω + 3.8 j Ω
Return Loss	- 28.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.1 Ω + 4.3 j Ω
Return Loss	- 25.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.205 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 17, 2003

DASY5 Validation Report for Head TSL

Date/Time: 17.05.2010 15:51:21

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 97.4 V/m; Power Drift = 0.00578 dB

Peak SAR (extrapolated) = 18.3 W/kg


SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 12.4 mW/g

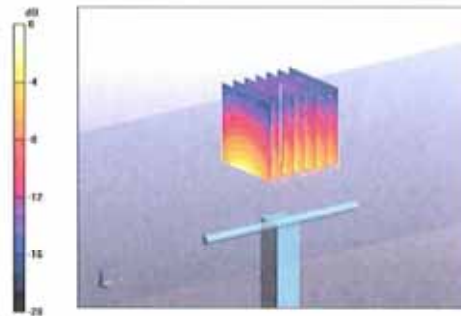

0 dB = 12.4mW/g

Impedance Measurement Plot for Head TSL

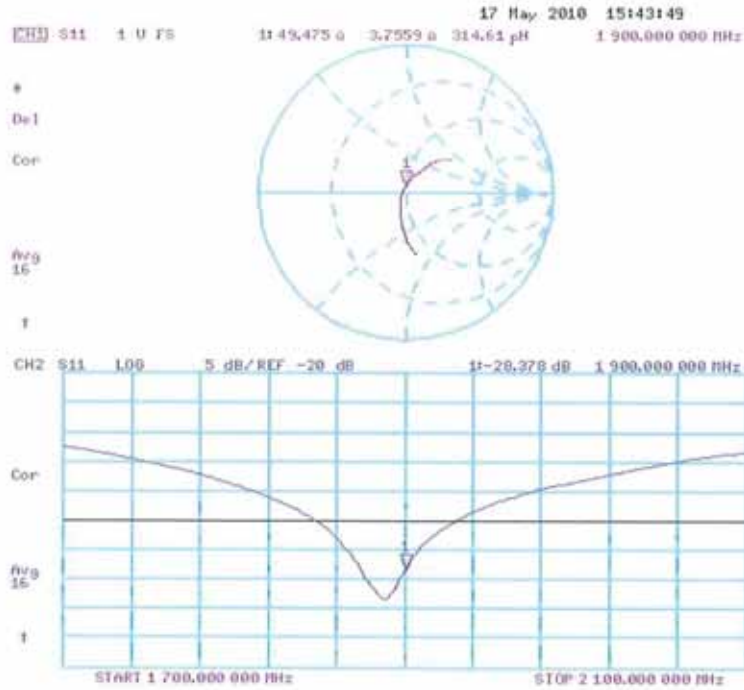

DASY5 Validation Report for Body

Date/Time: 26.05.2010 15:04:02

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.2 V/m; Power Drift = -0.00657 dB

Peak SAR (extrapolated) = 17.1 W/kg


SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 12.9 mW/g

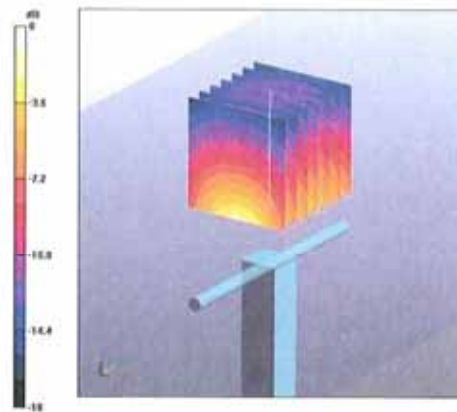

0 dB = 12.9mW/g

Impedance Measurement Plot for Body TSL

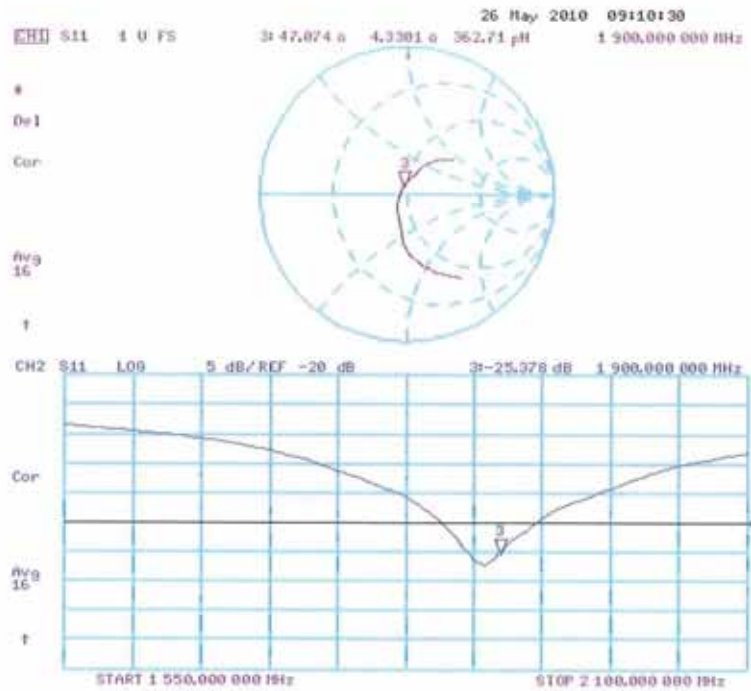

- 2450 MHz Dipole Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **D2450V2-734_May10**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 734**

Calibration procedure(s) **QA CAL-05.v7
 Calibration procedure for dipole validation kits**

Calibration date: **May 27, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100065	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by:	Name Dimce Iliev	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: May 27, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.76 mho/m \pm 6 %
Head TSL temperature during test	(21.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 mW / g
SAR normalized	normalized to 1W	51.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	51.7 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.03 mW / g
SAR normalized	normalized to 1W	24.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.2 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.97 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.4 mW / g
SAR normalized	normalized to 1W	53.6 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	53.5 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.31 mW / g
SAR normalized	normalized to 1W	25.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	25.2 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 Ω + 3.2 j Ω
Return Loss	- 26.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.8 Ω + 4.4 j Ω
Return Loss	- 27.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.153 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 07, 2003

DASY5 Validation Report for Head TSL

Date/Time: 25.05.2010 14:48:31

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.76 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.2 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 26.1 W/kg


SAR(1 g) = 12.8 mW/g; SAR(10 g) = 6.03 mW/g

Maximum value of SAR (measured) = 16.7 mW/g

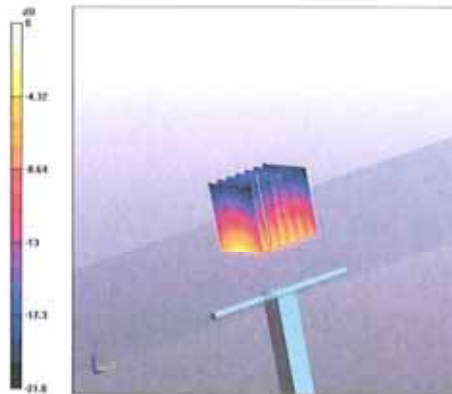

0 dB = 16.7mW/g

Impedance Measurement Plot for Head TSL

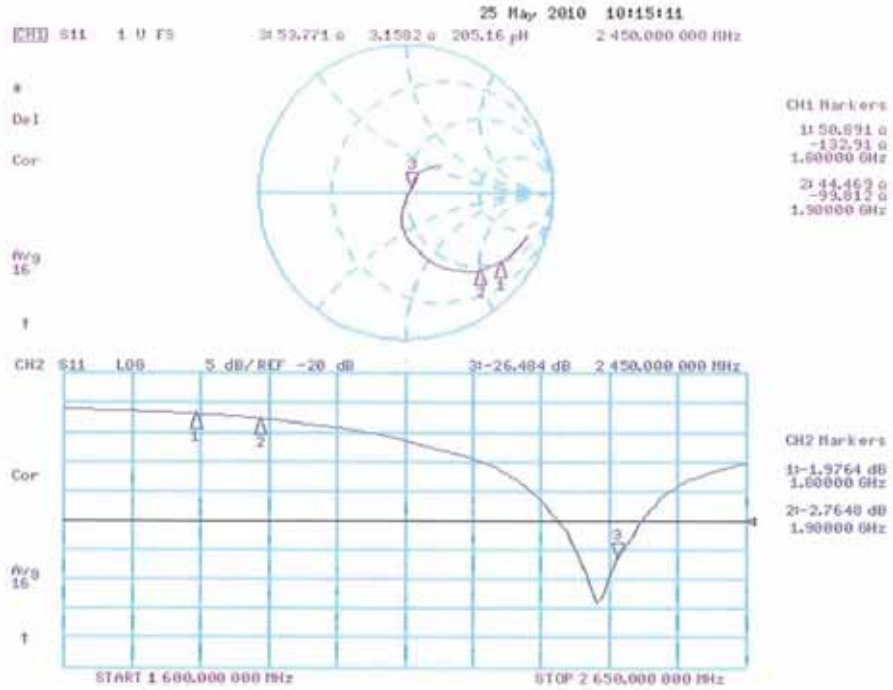

DASY5 Validation Report for Body

Date/Time: 27.05.2010 10:14:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.7 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 27.3 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.31 mW/g

Maximum value of SAR (measured) = 17.4 mW/g

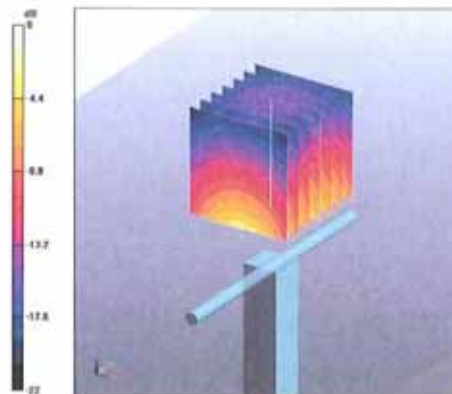

0 dB = 17.4mW/g

Impedance Measurement Plot for Body TSL

