

802.11g
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16302.000	50.35	-30.20	38.50	42.05	74.00	23.65	V
14761.500	47.60	-30.40	41.20	36.80	74.00	26.40	H
12562.500	47.27	-31.20	39.20	39.27	74.00	26.73	V
4825.000	45.39	-37.70	33.00	50.09	74.00	28.61	H
8621.000	42.62	-34.00	37.50	39.12	74.00	31.38	H
2384.200	57.54	-19.80	28.20	49.14	74.00	16.46	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16869.500	50.00	-29.60	40.00	39.60	74.00	24.00	V
14757.500	47.57	-30.40	41.20	36.77	74.00	26.43	V
12215.500	46.79	-32.20	38.90	40.19	74.00	27.21	H
8249.500	42.91	-34.70	37.00	40.61	74.00	31.09	H
7974.000	42.18	-35.40	36.90	40.68	74.00	31.82	V
4866.500	41.99	-37.50	33.40	46.09	74.00	32.01	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17977.500	49.90	-29.40	46.00	33.30	74.00	24.10	H
12631.000	46.84	-31.80	39.40	39.24	74.00	27.16	H
14812.000	46.69	-30.00	41.00	35.69	74.00	27.31	V
8263.000	43.03	-34.70	37.00	40.73	74.00	30.97	V
7993.500	42.40	-35.40	36.90	40.90	74.00	31.60	V
2497.100	57.82	-19.70	28.20	49.32	74.00	16.18	V

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.500	50.49	-29.40	46.00	33.89	74.00	23.51	V
14682.000	46.84	-30.00	41.50	35.34	74.00	27.16	H
12194.500	46.78	-32.20	38.90	40.18	74.00	27.22	V
4822.000	46.69	-37.70	33.00	51.39	74.00	27.31	V
8005.500	42.84	-35.40	36.90	41.34	74.00	31.16	V
2389.900	57.51	-19.80	28.20	49.11	74.00	16.49	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17941.500	50.17	-29.40	46.00	33.57	74.00	23.83	H
14765.500	47.19	-30.40	41.20	36.39	74.00	26.81	H
12632.500	46.48	-31.80	39.40	38.88	74.00	27.52	V
4872.000	42.67	-37.50	33.40	46.77	74.00	31.33	H
8672.500	42.66	-34.40	37.70	39.36	74.00	31.34	H
7997.500	42.20	-35.40	36.90	40.70	74.00	31.80	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16902.500	50.46	-29.30	40.30	39.46	74.00	23.54	V
14740.000	47.48	-30.20	41.40	36.38	74.00	26.52	V
12033.500	46.30	-32.20	39.00	39.60	74.00	27.70	V
8890.000	42.60	-34.80	37.80	39.60	74.00	31.40	H
7997.000	42.49	-35.40	36.90	40.99	74.00	31.51	H
2485.900	58.61	-19.70	28.20	50.11	74.00	15.39	H

Average
802.11b
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4824.000	43.02	-37.70	33.00	47.72	54.00	10.98	H
17951.500	40.95	-29.40	46.00	24.35	54.00	13.05	H
14839.500	38.38	-30.00	41.00	27.38	54.00	15.62	H
12560.000	37.79	-31.20	39.20	29.79	54.00	16.21	V
8677.500	33.56	-34.40	37.70	30.26	54.00	20.44	H
2379.200	47.71	-19.80	28.20	39.31	54.00	6.29	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16868.500	41.06	-29.60	40.00	30.66	54.00	12.94	V
4874.000	38.43	-37.50	33.40	42.53	54.00	15.57	V
14835.000	38.07	-30.00	41.00	27.07	54.00	15.93	H
12565.000	37.71	-31.20	39.20	29.71	54.00	16.29	H
8535.000	33.40	-34.30	37.40	30.30	54.00	20.60	V
7986.500	32.89	-35.40	36.90	31.39	54.00	21.11	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16865.000	40.69	-29.60	40.00	30.29	54.00	13.31	H
14760.000	37.94	-30.40	41.20	27.14	54.00	16.06	H
12564.000	37.71	-31.20	39.20	29.71	54.00	16.29	V
4924.000	37.11	-37.60	33.30	41.41	54.00	16.89	H
8681.000	33.26	-34.40	37.70	29.96	54.00	20.74	V
2487.600	49.25	-19.70	28.20	40.75	54.00	4.75	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.000	40.69	-29.40	46.00	24.09	54.00	13.31	V
14765.500	38.03	-30.40	41.20	27.23	54.00	15.97	H
12563.000	37.20	-31.20	39.20	29.20	54.00	16.80	V
4820.000	35.24	-37.70	33.00	39.94	54.00	18.76	H
8507.000	33.06	-34.60	37.30	30.36	54.00	20.94	H
2389.500	47.43	-19.80	28.20	39.03	54.00	6.57	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.000	40.60	-29.40	46.00	24.00	54.00	13.40	V
14763.500	37.51	-30.40	41.20	26.71	54.00	16.49	H
12562.500	37.08	-31.20	39.20	29.08	54.00	16.92	H
8496.000	33.04	-34.60	37.30	30.34	54.00	20.96	V
8000.000	33.03	-35.40	36.90	31.53	54.00	20.97	H
4874.500	32.04	-37.50	33.40	36.14	54.00	21.96	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.000	40.50	-29.40	46.00	23.90	54.00	13.50	H
14830.500	37.55	-30.00	41.00	26.55	54.00	16.45	V
12562.500	37.39	-31.20	39.20	29.39	54.00	16.61	V
7982.500	32.93	-35.40	36.90	31.43	54.00	21.07	V
8478.000	32.92	-34.60	37.30	30.22	54.00	21.08	V
2485.600	48.07	-19.70	28.20	39.57	54.00	5.93	V

802.11n-HT20
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.500	40.71	-29.40	46.00	24.11	54.00	13.29	H
12557.500	37.50	-31.20	39.20	29.50	54.00	16.50	V
14766.500	37.45	-30.40	41.20	26.65	54.00	16.55	H
4817.500	34.70	-37.70	33.00	39.40	54.00	19.30	H
8510.500	33.23	-34.60	37.30	30.53	54.00	20.77	V
2389.900	48.10	-19.80	28.20	39.70	54.00	5.90	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17934.000	40.60	-29.40	46.00	24.00	54.00	13.40	H
12562.000	37.62	-31.20	39.20	29.62	54.00	16.38	V
14767.000	37.55	-30.40	41.20	26.75	54.00	16.45	V
8148.500	32.91	-35.20	37.00	31.11	54.00	21.09	V
7991.500	32.78	-35.40	36.90	31.28	54.00	21.22	H
4875.000	32.76	-37.50	33.40	36.86	54.00	21.24	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.000	40.70	-29.40	46.00	24.10	54.00	13.30	H
12567.000	37.37	-31.20	39.20	29.37	54.00	16.63	V
14740.000	37.33	-30.20	41.40	26.23	54.00	16.67	V
8621.500	32.99	-34.00	37.50	29.49	54.00	21.01	H
7989.500	32.33	-35.40	36.90	30.83	54.00	21.67	V
2485.400	48.72	-19.70	28.20	40.22	54.00	5.28	H

Test graphs as below:

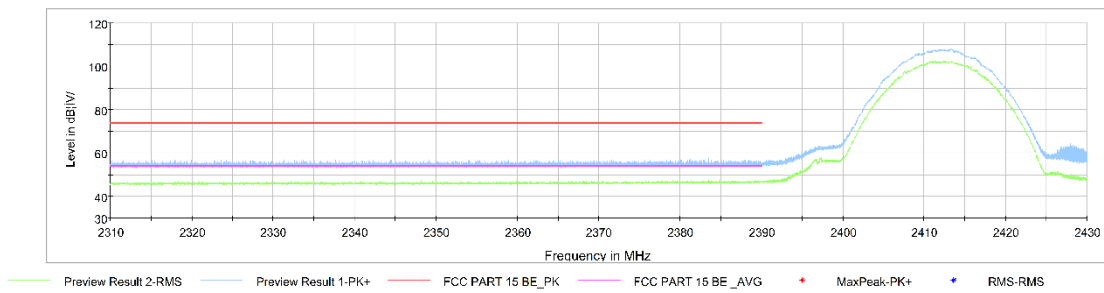


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz - 2.43GHz

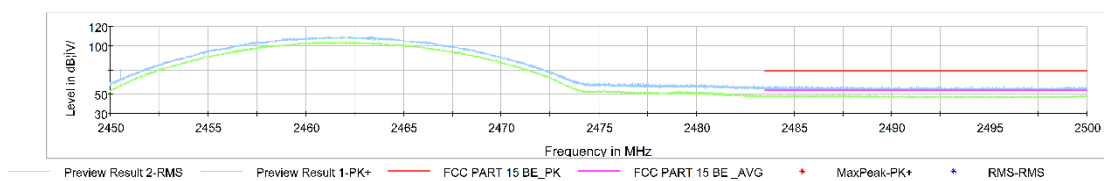


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

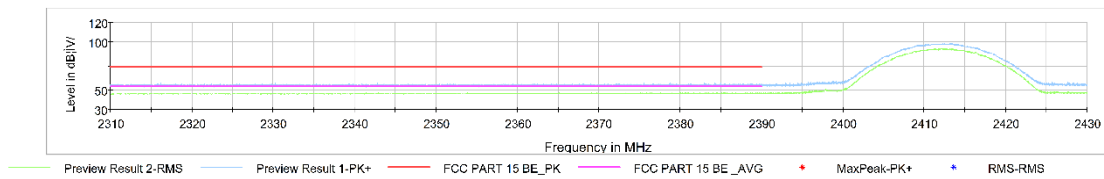


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

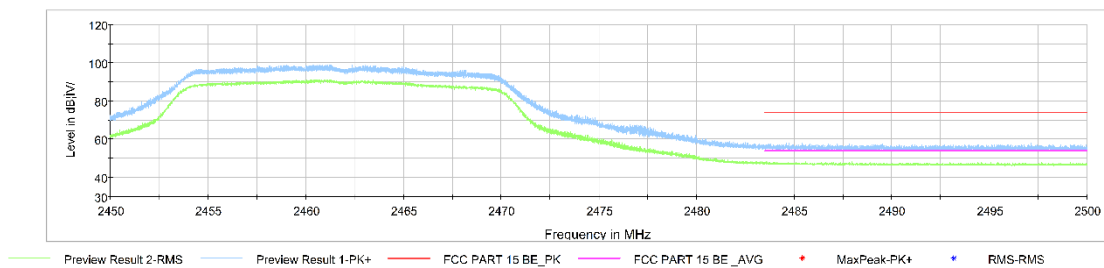


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

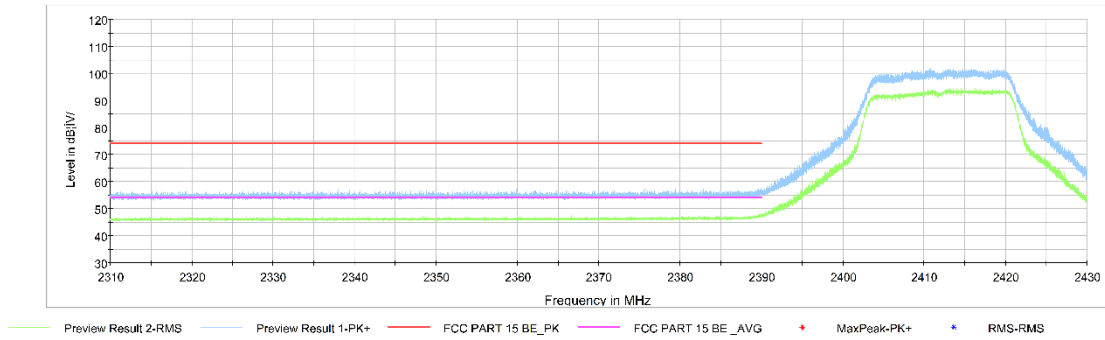


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

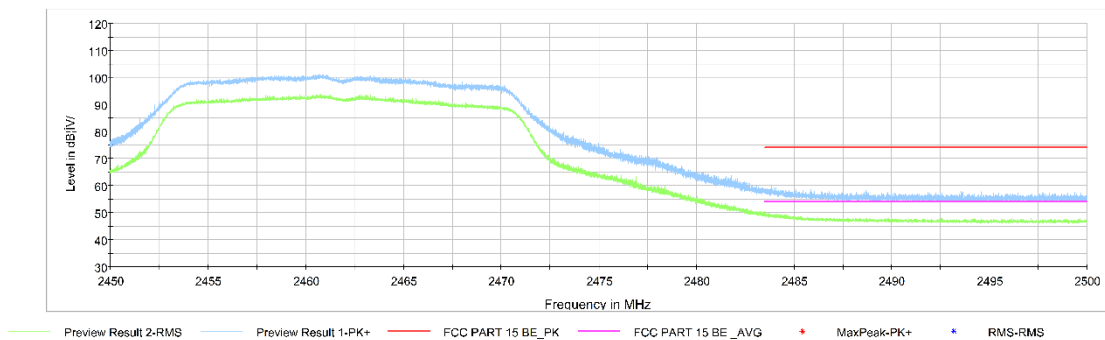


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

Measurement results for Set.1:

Result for Traffic:

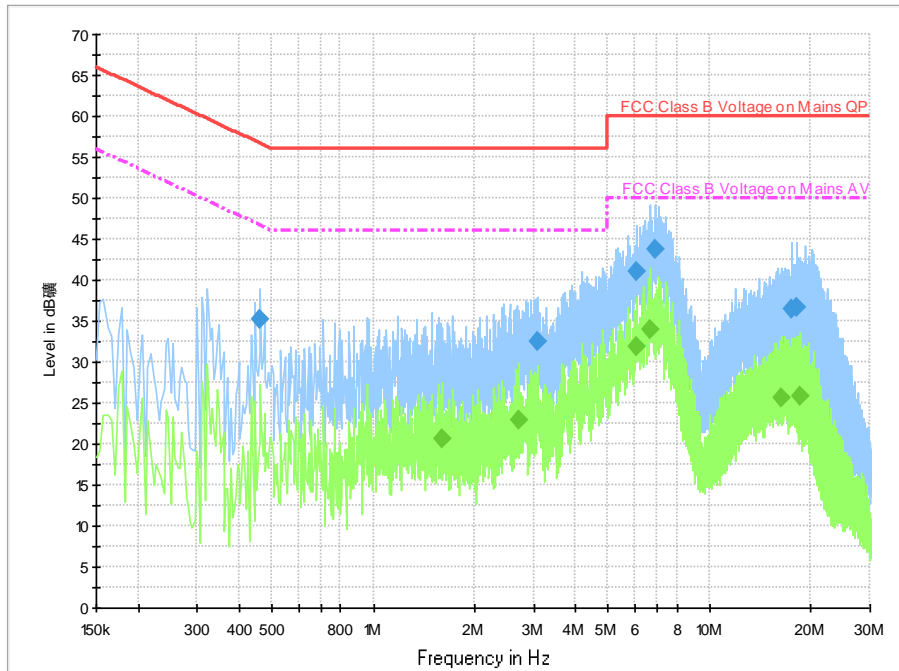


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.462000	35.3	2000.0	9.000	On	L1	19.7	21.3	56.7	
3.074000	32.4	2000.0	9.000	On	L1	19.6	23.6	56.0	
6.058000	41.0	2000.0	9.000	On	L1	19.6	19.0	60.0	
6.926000	43.7	2000.0	9.000	On	L1	19.6	16.3	60.0	
17.598000	36.5	2000.0	9.000	On	N	19.7	23.5	60.0	
18.146000	36.6	2000.0	9.000	On	N	19.7	23.4	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
1.606000	20.5	2000.0	9.000	On	L1	19.6	25.5	46.0	
2.710000	22.9	2000.0	9.000	On	L1	19.6	23.1	46.0	
6.058000	31.9	2000.0	9.000	On	L1	19.6	18.1	50.0	
6.642000	34.0	2000.0	9.000	On	L1	19.6	16.0	50.0	
16.274000	25.6	2000.0	9.000	On	N	19.7	24.4	50.0	
18.514000	25.8	2000.0	9.000	On	N	19.8	24.2	50.0	

Measurement results for Set.1:

Result for Idle:

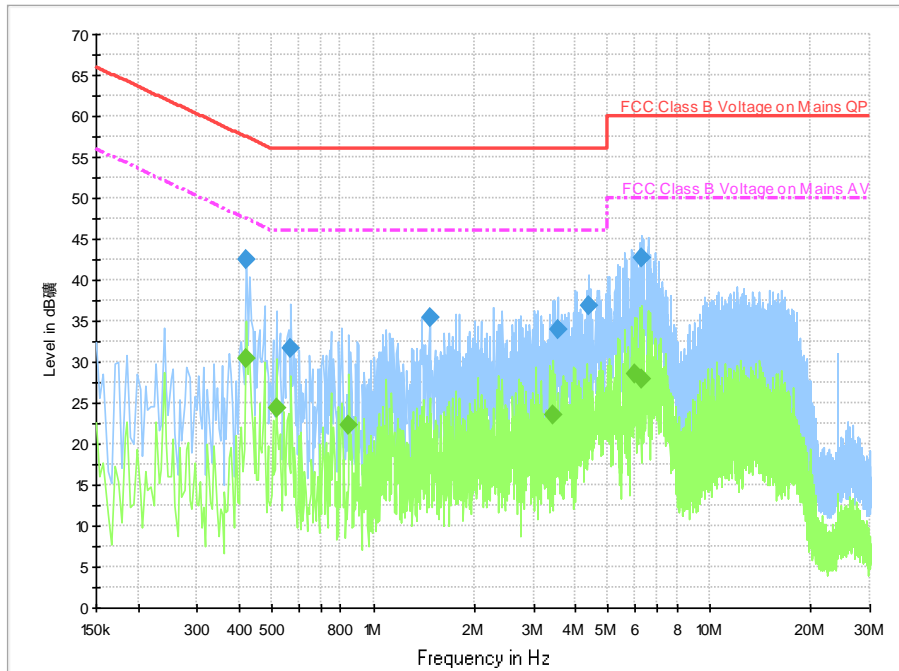


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.418000	42.6	2000.0	9.000	On	L1	19.7	14.9	57.5	
0.570000	31.6	2000.0	9.000	On	L1	19.7	24.4	56.0	
1.470000	35.4	2000.0	9.000	On	L1	19.7	20.6	56.0	
3.530000	33.9	2000.0	9.000	On	L1	19.6	22.1	56.0	
4.374000	36.9	2000.0	9.000	On	L1	19.6	19.1	56.0	
6.274000	42.6	2000.0	9.000	On	L1	19.6	17.4	60.0	


Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.418000	30.3	2000.0	9.000	On	L1	19.7	17.2	47.5	
0.514000	24.3	2000.0	9.000	On	L1	19.7	21.7	46.0	
0.846000	22.3	2000.0	9.000	On	L1	19.7	23.7	46.0	
3.434000	23.6	2000.0	9.000	On	L1	19.6	22.4	46.0	
5.982000	28.5	2000.0	9.000	On	L1	19.6	21.5	50.0	
6.310000	27.9	2000.0	9.000	On	L1	19.6	22.1	50.0	

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p>	
<hr/> <p>2022-10-01 through 2023-09-30 <i>Effective Dates</i></p>	  <i>For the National Voluntary Laboratory Accreditation Program</i>

END OF REPORT