

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2308-0120(1)

2. Customer

- Name (FCC) : LG Electronics USA, Inc. / Name (IC) : LG ELECTRONICS INC.
- Address (FCC) : 111 Sylvan Avenue North Building Englewood Cliffs New Jersey United States 07632  
Address (IC) : 222, LG-ro, Jinwi-myeon Pyeongtaek-si, Gyeonggi-do 451-713 Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Telematics(24CY DCM 5G) / TF24IENE  
FCC ID : BEJTF24IENE  
IC : 2703H-TF24IENE

5. FCC Regulation(s): Part 15.407  
IC Standard(s): RSS-247 Issue 2  
Test Method used: KDB905462 D02v02 , KDB905462 D03v1r02

6. Date of Test : 2023.05.15 ~ 2023.05.16, 2023.09.06



7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : JaeHyeok Bang 	Name : JaeJin Lee 

2023 . 09 . 06 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2308-0120	Aug. 24, 2023	Initial issue	JaeHyeok Bang	JaeJin Lee
DRTFCC2308-0120(1)	Sep. 06, 2023	Re-test	JaeHyeok Bang	JaeJin Lee

## Table of Contents

<b>1. GENERAL INFORMATION EUT DESCRIPTION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Test Support Equipment .....	4
1.3. Testing Laboratory .....	5
1.4. Testing Environment .....	5
<b>2. DYNAMIC FREQUENCY SELECTION TEST DESCRIPTION ...</b>	<b>6</b>
2.1. Applicability of DFS requirements prior to use of a channel ...	6
2.2. Applicability of DFS requirements during normal operation ...	6
2.3. Requirements of client devices .....	7
2.4. DFS response requirement values .....	7
2.5. DFS detection thresholds .....	8
2.6. Radar test waveforms .....	9
<b>3. Test procedure .....</b>	<b>10</b>
3.1. Setup for Client with injection at the Master .....	10
3.2. Spectrum analyzer setting parameter .....	10
3.3. Conducted test procedure .....	10
<b>4. SUMMARY OF TESTS .....</b>	<b>11</b>
<b>5. LIST OF EQUIPMENTS .....</b>	<b>12</b>
<b>6. TEST RESULTS .....</b>	<b>13</b>
6.1. Move time and aggregate time .....	13
6.1.1. U-NII-2A : 5 290 MHz .....	13
6.1.2. U-NII-2C : 5 530 MHz .....	13
6.2. Non-occupancy period .....	14
6.2.1. U-NII-2A: 5 290 MHz .....	14
6.2.2. U-NII-2C: 5 530 MHz .....	14
<b>APPENDIX I .....</b>	<b>15</b>

# 1. GENERAL INFORMATION EUT DESCRIPTION

## 1.1. EUT Description

<b>Equipment class</b>	Unlicensed National Information Infrastructure TX (NII)
<b>Product Name</b>	Telematics(24CY DCM 5G)
<b>Model Name</b>	TF24IENE
<b>Add Model Name</b>	-
<b>Product Marketing Name (PMN)</b>	TF24IENE
<b>Firmware Version Identification Number</b>	06a
<b>Power supply</b>	DC 12 V
<b>EUT capabilities</b>	DFS
<b>Operational mode</b>	<input type="checkbox"/> Master mode <input checked="" type="checkbox"/> Client mode without radar detection <input type="checkbox"/> Client mode with radar detection
<b>Test condition</b>	<input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated
<b>Frequency Range</b>	<b>U-NII 2A(5 250 MHz ~ 5 350 MHz)</b> ▪ 802.11a/n(HT20)/ac(VHT20): 5 260 MHz ~ 5 320 MHz ▪ 802.11n(HT40)/ac(VHT40): 5 270 MHz ~ 5 310 MHz ▪ 802.11ac(VHT80): 5 290 MHz
	<b>U-NII 2C(5 470 MHz ~ 5 725 MHz)</b> ▪ 802.11a/n(HT20)/ac(VHT20): 5 500 MHz ~ 5 580 MHz, 5 660 MHz ~ 5 720 MHz ▪ 802.11n(HT40)/ac(VHT40): 5 510 MHz ~ 5 550 MHz, 5 670 MHz ~ 5 710 MHz ▪ 802.11ac(VHT80): 5 530 MHz, 5 690 MHz
<b>Modulation type</b>	OFDM
<b>Antenna specification</b>	<b>Antenna type:</b> PIFA Antenna <b>Antenna gain</b> U-NII 2A : 0.50 dBi U-NII 2C : 0.40 dBi

Note1: The above EUT information was declared by the manufacturer.

Note2: Refer to UNII report

## 1.2. Test Support Equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Access Point (Master)	DIR-868L	R3X81E6000093	D-Link	FCC ID: KA2IR868LA1 Contains FCC ID: RRK2012060056-1 IC: 4216A-IR868LA1 Contains IC: 4833A-WMCAC01A1

### 1.3. Testing Laboratory

<b>Dt&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.		
- FCC & IC MRA Designation No. : KR0034		
- ISED#: 5740A		
<a href="http://www.dtnc.net">www.dtnc.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 1.4. Testing Environment

Ambient Condition	
▪ Temperature	+22 °C ~ +23 °C
▪ Relative Humidity	+39 % ~ +42 %

## 2. DYNAMIC FREQUENCY SELECTION TEST DESCRIPTION

### 2.1. Applicability of DFS requirements prior to use of a channel

Requirement	Operational mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

### 2.2. Applicability of DFS requirements during normal operation

Requirement	Operational mode	
	Master or client with radar detection	Client without radar detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Operational mode	
	Master or client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

**Note:** Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

The EUT was tested according to the following specification:  
**905462 D02 UNII DFS Compliance Procedure New Rules v02**  
**905462 D03 UNII Client Without Radar Detection New Rules v01r02**

### 2.3. Requirements of client devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

### 2.4. DFS response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel availability check time	60 seconds
Channel move time	10 seconds See Note 1.
Channel closing transmission time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<p><b>Note 1:</b> Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions..</p>	

## 2.5. DFS detection thresholds

Below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	




## 2.6. Radar test waveforms

Radar type	Pulse width (μsec)	PRI (μsec)	Number of pulses	Minimum percentage of successful detection	Minimum number of trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in section 2.6.2.	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{PRI_{\mu\text{sec}}} \right) \right\}$	60 %	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1 ~ 5	150 ~ 230	23 ~ 29	60 %	30
3	6 ~ 10	200 ~ 500	16 ~ 18	60 %	30
4	11 ~ 20	200 ~ 500	12 ~ 16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
<p><b>Note 1:</b> As the EUT is a Client Device with no Radar Detection only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.</p> <p><b>Note 2:</b> This report was applied Short Pulse Radar Type 0.</p>					

### 3. Test procedure

#### 3.1. Setup for Client with injection at the Master

The setup method is shown below diagram. The method according to the 905462 D02 UNII DFS Compliance Procedure New Rules v02 - section 7.2

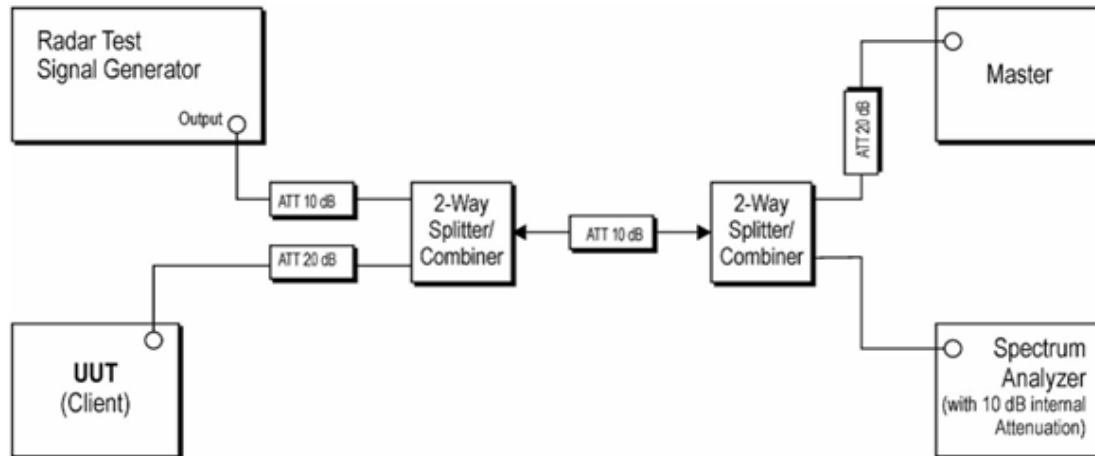

#### 3.2. Spectrum analyzer setting parameter

The setting parameter is shown below and it according to the 905462 D02 UNII DFS Compliance Procedure New Rules v02 - section 7.5

- 1) **RBW /VBW  $\geq$  3MHz**
- 2) **Detector = Peak**
- 3) **Span = zero span**
- 4) **Sweep time  $\geq$  12s**

#### 3.3. Conducted test procedure

- 1) One frequency will be chosen from the Operating Channels of the UUT within the 5 250 MHz - 5 350 MHz or 5 470 MHz - 5 725 MHz bands.
- 2) The Client Device (EUT) is set up the above diagram and communications between the Master device and the Client is established.
- 3) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test. (The MPEG file specified by the FCC ("*6 ½ Magic Hours*")
- 4) An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- 5) Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 12 seconds for Radar Type 0 to ensure detection occurs.
- 6) After the initial radar burst the channel is monitored for 30 minutes to ensure no transmissions or beacons occur. A second monitoring setup is used to verify that the Master and Client have both moved to different channels.

## 4. SUMMARY OF TESTS

Parameter	Limit	Status Note 1
Channel move time	10 seconds	<b>C</b> Note 2
Channel closing transmission time	200 ms + aggregate of 60ms over remaining 10 second period	<b>C</b> Note 2, 3
Non-occupancy period	30 minutes	<b>C</b>
<p><b>Note 1:</b> <b>C</b>=Comply    <b>NC</b>=Not Comply    <b>NT</b>=Not Tested    <b>NA</b>=Not Applicable</p> <p><b>Note 2:</b> Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 3:</b> The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>		

## 5. LIST OF EQUIPMENTS


Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	KEYSIGHT	N9020A	22/12/16	23/12/16	MY53309959
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-1
PXIS-2670(G)	ADLINK	3025C	23/06/23	24/06/23	302581/834
PXIS-2670(G)	ADLINK	3035C	23/06/23	24/06/23	303581/927
GNSS simulator	SPIRENT	GSS6300	22/12/16	23/12/16	60781578
Attenuator	Hefei Shunze	SS5T2.92-10-40	22/12/16	23/12/16	16012201
Attenuator	Aeroflex/Weinschel	86-20-11	23/06/23	24/06/23	432
Power Splitter	Anritsu	K241B	23/06/23	24/06/23	1701101
Power Splitter	Anritsu	K241B	23/06/23	24/06/23	1701102
Power Divider	Anritsu	K240B	23/06/23	24/06/23	1701099
Power Divider	Weinschel	1515-1	23/06/23	24/06/23	TA375
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-040
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-049
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-050
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-053
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-077
Cable	Dt&C	Cable	23/01/04	24/01/04	RFC-44
Test Software	Aeroflex.,Ltd	DFS Radar simulator and Analyzer	NA	NA	Version 2.5.2

Note1: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.


## 6. TEST RESULTS

### 6.1. Move time and aggregate time

#### 6.1.1. U-NII-2A : 5 290 MHz

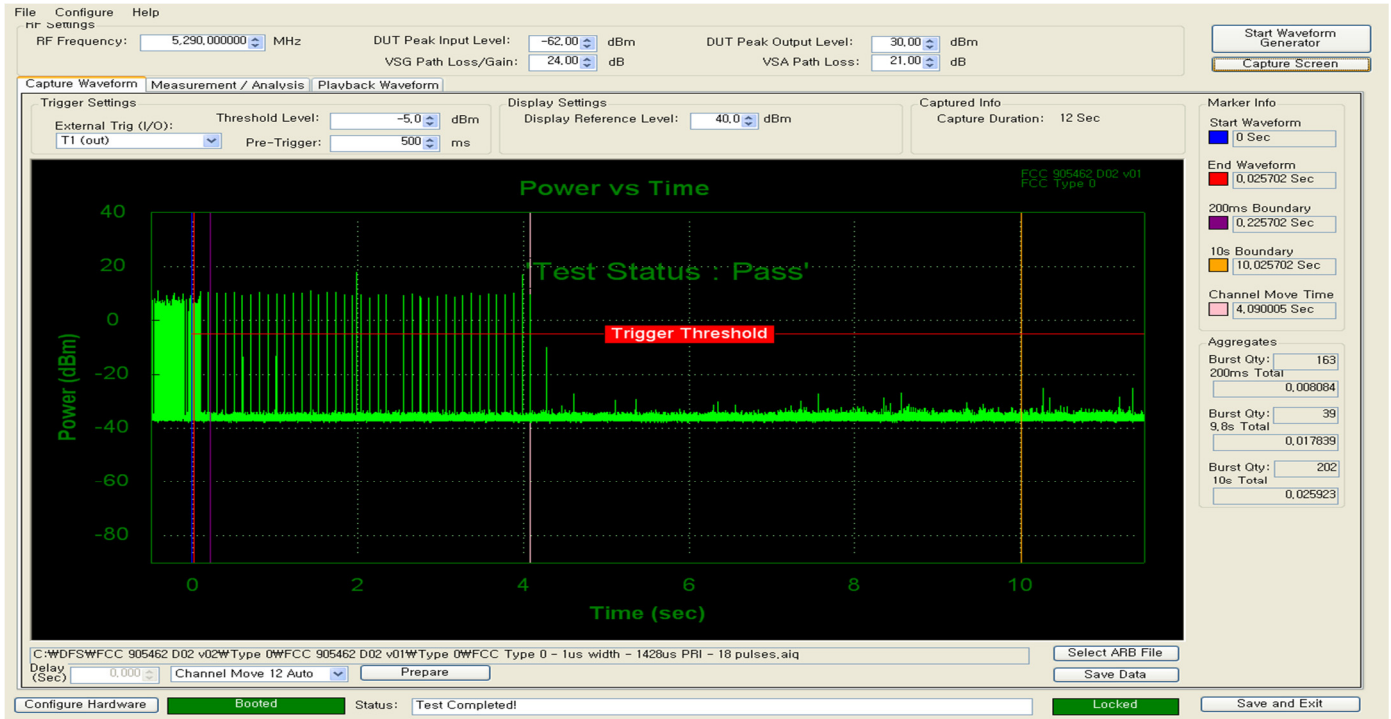

#### 6.1.2. U-NII-2C : 5 530 MHz

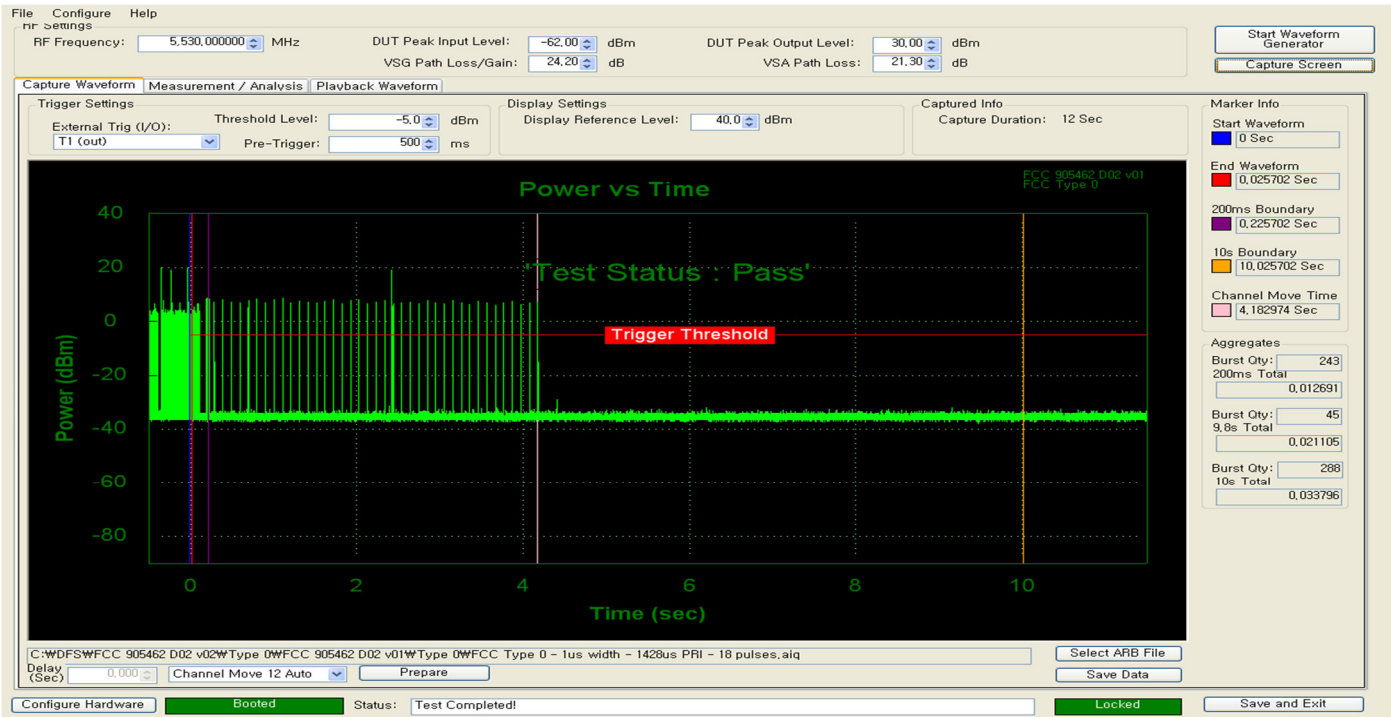




APPENDIX I

Channel loading

U-NII-2A: 5 290 MHz

Timing plots: A minimum channel loading of approximately 17 % or greater

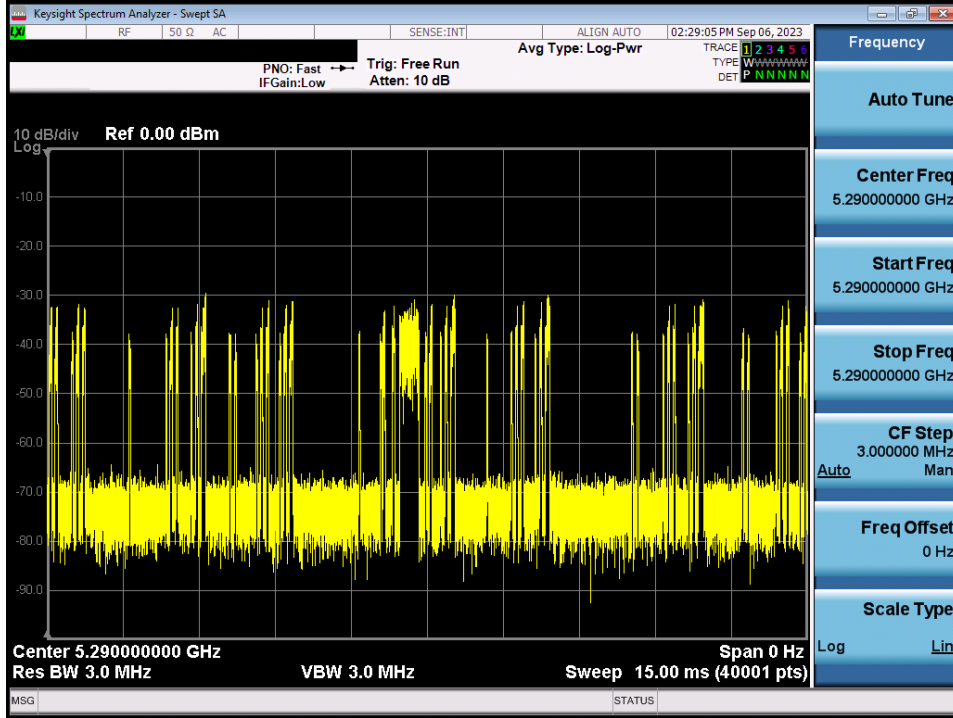

- Spectrum Analyzer setting

- 1) Span: Zero
- 2) Sweep points: 40 001

Calculation:

$$\text{Channel loading} = (\text{Channel loading sweep points} / \text{Total sweep points}) \times 100$$


$$= (7\ 131 / 40\ 001) \times 100 = 17.83 \%$$

Note: The Channel loading sweep points were extracted from the spectrum and calculated.

Channel loading

U-NII-2C: 5 530 MHz

Timing plots: A minimum channel loading of approximately 17 % or greater

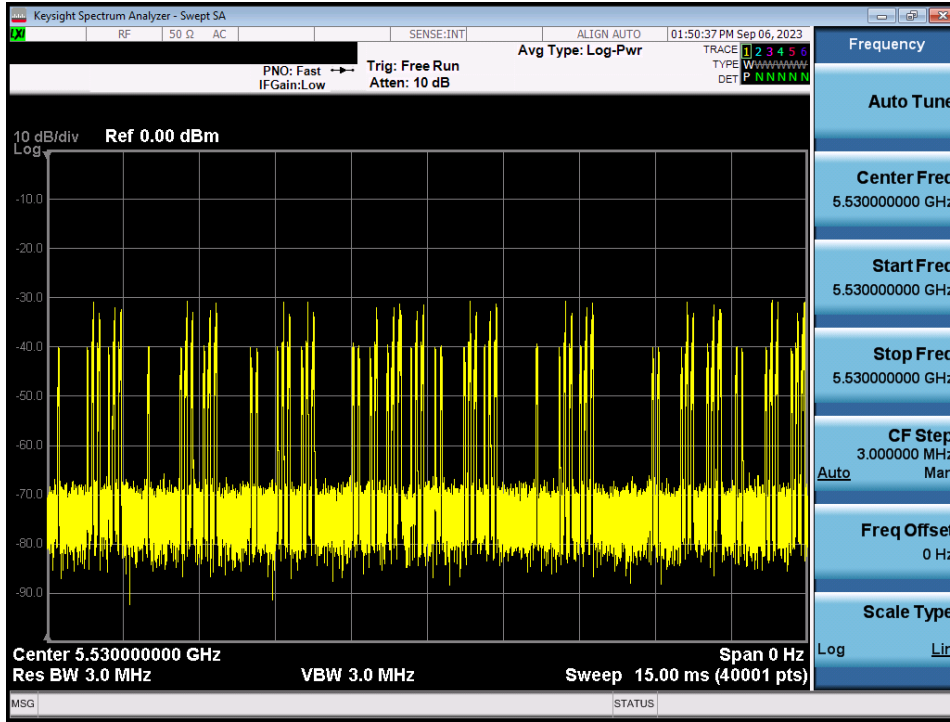

- Spectrum Analyzer setting

- 1) Span: Zero
- 2) Sweep points: 40 001

Calculation:

$$\text{Channel loading} = (\text{Channel loading sweep points} / \text{Total sweep points}) \times 100$$

$$= (7\ 141 / 40\ 001) \times 100 = 17.85 \%$$

Note: The Channel loading sweep points were extracted from the spectrum and calculated.