

TEST REPORT

FCC LTE Test for TFGMEIBBCD4
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2308-FC004

DATE OF ISSUE
October 5, 2023

Tested by
Jung Ki Lim

Technical Manager
Jong Seok Lee

HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST
REPORT**

FCC LTE Test for
TFGMEIBBCD4

REPORT NO.

HCT-RF-2308-FC004

DATE OF ISSUE

October 05, 2023

Additional Model

TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8,
TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC

Applicant

LG Electronics Inc.

10, MagokJungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea

**Eut Type
Model Name**

GM Onstar Gen12 ROW
TFGMEIBBCD4

FCC ID

BEJTFGMEIBBCD4

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

§ 24, § 2

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	October 05, 2023	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED TEST	10
3.3.1 RADIATED POWER	11
3.3.2 RADIATED SPURIOUS EMISSIONS	12
3.4 PEAK- TO- AVERAGE RATIO	14
3.5 OCCUPIED BANDWIDTH.	16
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	17
3.7 BAND EDGE	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	19
3.9 WORST CASE(RADIATED TEST)	20
3.10 WORST CASE(CONDUCTED TEST)	21
4. LIST OF TEST EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	24
6. SUMMARY OF TEST RESULTS	25
7. EMISSION DESIGNATOR	26
8. TEST DATA	27
8.1 Conducted Output Power	27
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	33
8.2.1 External Antenna	33
8.2.2 Internal Antenna	36
8.3 RADIATED SPURIOUS EMISSIONS	39
8.3.1 External Antenna	39
8.3.2 Internal Antenna	40
8.4 PEAK-TO-AVERAGE RATIO	41
8.5 OCCUPIED BANDWIDTH	42
8.6 CONDUCTED SPURIOUS EMISSIONS	43
8.7 BAND EDGE	43
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	44
9. TEST PLOTS	62
10. ANNEX A_ TEST SETUP PHOTO	183

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	10, Magok Jungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea
FCC ID:	BEJTFGMEIBBCD4
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 24, § 2
EUT Type:	GM Onstar Gen12 ROW
Model(s):	TFGMEIBBCD4
Additional Model:	TFGMEIBBCD5,TFGMEIBBCD6,TFGMEIBBCD7,TFGMEIBBCD8, TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC
Tx Frequency:	1850.7 MHz - 1909.3 MHz : 1.4 MHz 1851.5 MHz - 1908.5 MHz : 3 MHz 1852.5 MHz - 1907.5 MHz : 5 MHz 1855.0 MHz - 1905.0 MHz : 10 MHz 1857.5 MHz - 1902.5 MHz : 15 MHz 1860.0 MHz - 1900.0 MHz : 20 MHz
Date(s) of Tests:	February 27, 2023 ~ October 05, 2023
Serial number:	Radiated - External Antenna : EBR36018942_#30 - Internal Antenna : EBR36018942K_#14 Conducted : EBR36018829_#75
External Antenna Information	ANT5 : 86531607 ANT4 : 86575530 DUT4 : 85608774

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP External Antenna		EIRP Internal Antenna	
				Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.527	27.22	0.505	27.03
		1M09W7D	16QAM	0.454	26.57	0.446	26.49
		1M09W7D	64QAM	0.296	24.72	0.343	25.35
		1M09W7D	256QAM	0.169	22.29	0.170	22.31
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.495	26.95	0.525	27.20
		2M70W7D	16QAM	0.432	26.35	0.450	26.53
		2M70W7D	64QAM	0.305	24.84	0.323	25.09
		2M72W7D	256QAM	0.163	22.13	0.172	22.35
LTE – Band2 (5)	1852.5 - 1907.5	4M52G7D	QPSK	0.527	27.22	0.528	27.23
		4M49W7D	16QAM	0.446	26.49	0.448	26.51
		4M52W7D	64QAM	0.318	25.02	0.345	25.38
		4M50W7D	256QAM	0.171	22.32	0.173	22.38
LTE – Band2 (10)	1855.0 - 1905.0	8M97G7D	QPSK	0.531	27.25	0.481	26.82
		8M97W7D	16QAM	0.449	26.52	0.403	26.05
		8M97W7D	64QAM	0.322	25.08	0.309	24.90
		8M97W7D	256QAM	0.173	22.39	0.156	21.92
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.512	27.09	0.445	26.48
		13M5W7D	16QAM	0.435	26.38	0.377	25.76
		13M4W7D	64QAM	0.312	24.94	0.301	24.78
		13M4W7D	256QAM	0.171	22.33	0.151	21.78
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.513	27.10	0.450	26.53
		18M0W7D	16QAM	0.439	26.42	0.381	25.81
		17M9W7D	64QAM	0.321	25.07	0.303	24.81
		17M9W7D	256QAM	0.170	22.30	0.151	21.80



2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a GM Onstar Gen12 ROW with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

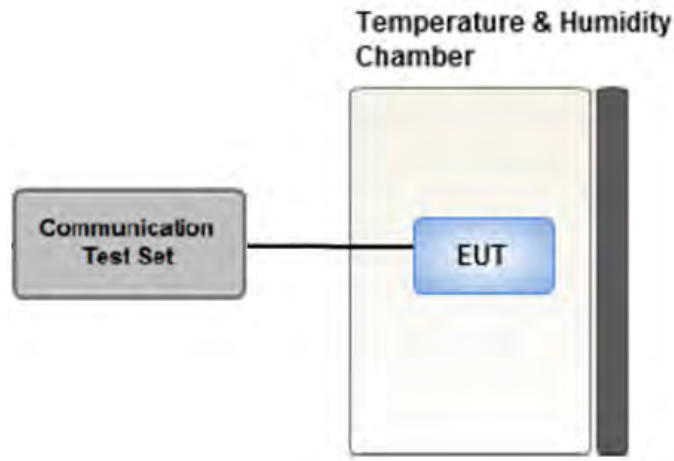

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.


3.3 RADIATED TEST

Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

Test Configuration


Below 30 MHz

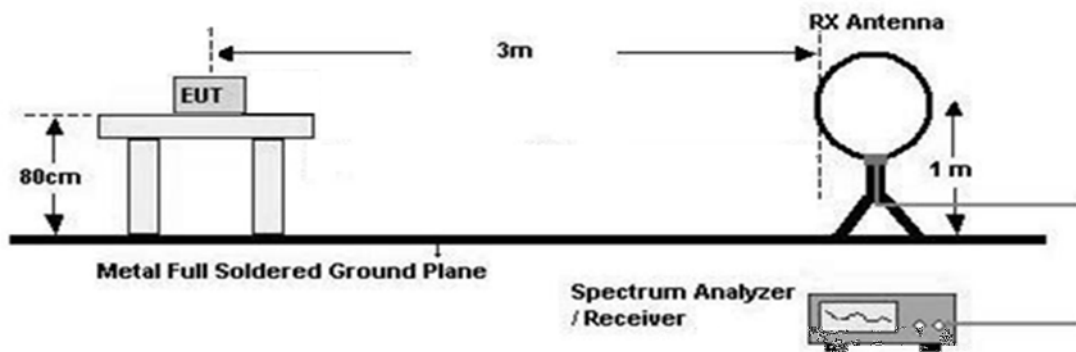

30 MHz - 1 GHz

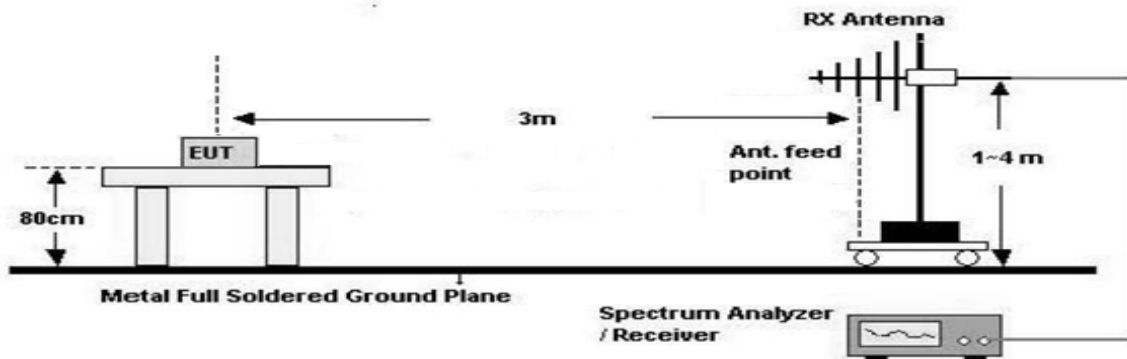

Above 1 GHz

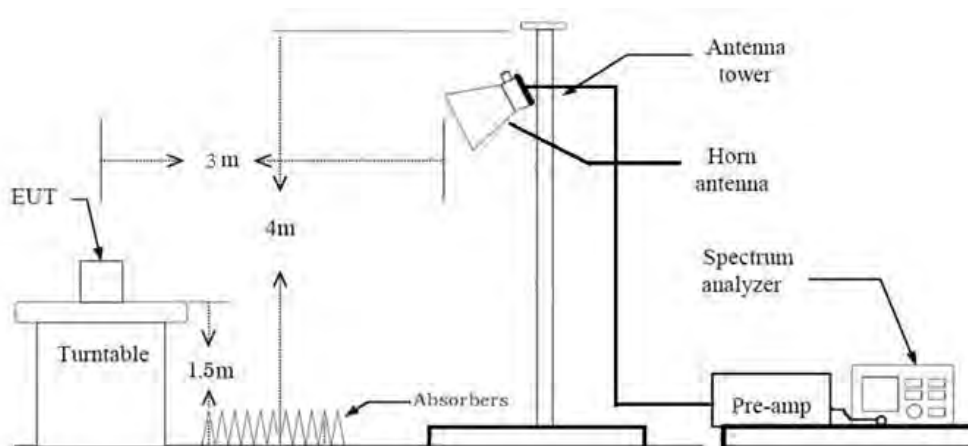

3.3.1 RADIATED POWER

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7. Total(dB μ V/m) = Measured Value(dB μ V) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
 - = Total (dB μ V/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
 - = Total (dB μ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

3.3.2 RADIATED SPURIOUS EMISSIONS

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
2. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Below 30 MHz

1. The loop antenna was placed at a location 3 m from the EUT
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
6. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. EIRP (dBm)
= Total (dB μ V/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
= Total (dB μ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


Below 1 GHz

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
 - = Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
 - = Total (dBμV/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

Above 1 GHz

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
 - + H.P.F(dB) - Amp Gain(dB)
8. EIRP (dBm)
 - = Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
 - = Total (dBμV/m) - 95.2(dB)

3.4 PEAK- TO- AVERAGE RATIO

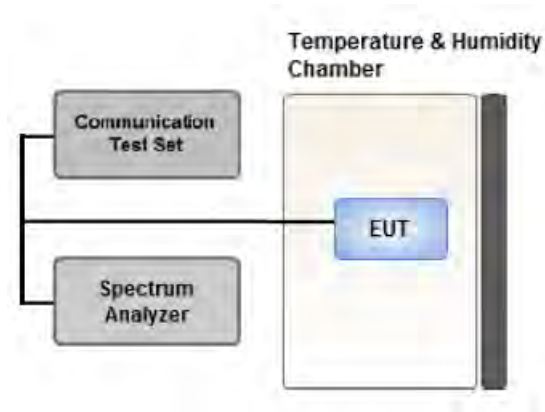

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② **Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

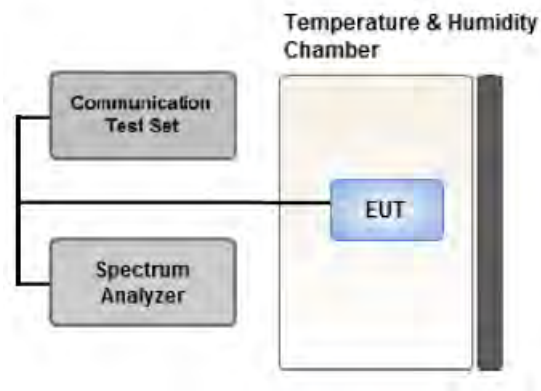

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

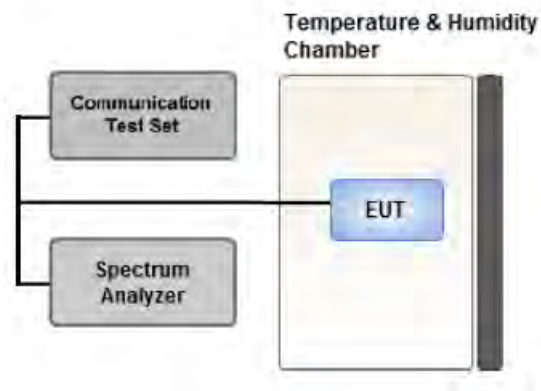

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

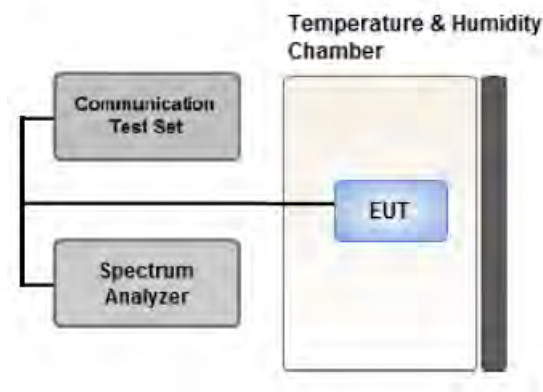

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/\text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

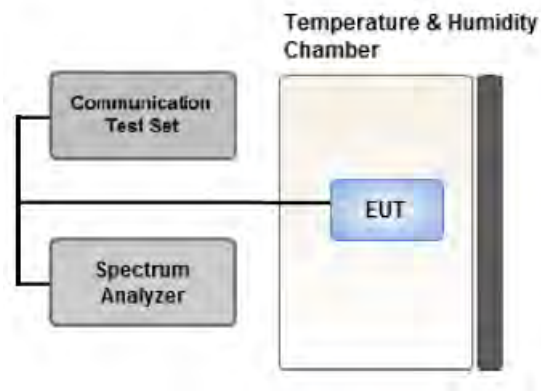

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Internal Antenna, External Antenna (ANT 5, ANT 4, DUT 4)
 Worst case : Internal Antenna, External Antenna (ANT 5)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.
 (External Antenna Worst case : 10 MHz)
 (Internal Antenna Worst case : 5 MHz)
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
 (Worst case : TFGMEIBBCD4)

[External Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Only X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Only X

[Internal Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
(Worst case : TFGMEIBBCD4)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
20	Low	1	0		
	High	1	99		
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1251/489 20320/P	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090002	N/A	N/A
RF Switch System	TMX0132C	TNM System	TM21100002	N/A	N/A
RF Switch System	FBSR-04C(3G HPF+LNA)	TNM System	S4L1	08/18/2024	Annual
RF Switch System	FBSR-04C(LNA)	TNM System	S4L4	08/18/2024	Annual
RF Switch System	FBSR-04C(Thru)	TNM System	S4L6	08/18/2024	Annual
HIGHPASS FILTER	WHKX10-900-1000-15000- 40SS	WAINWRIGHT INSTRUMENTS	16	08/01/2024	Annual
HIGHPASS FILTER	WHNX6.0/26.5G-6SS	WAINWRIGHT INSTRUMENTS	1	01/19/2024	Annual
Power Amplifier	CBL18265035	CERNEK	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEK	25956	03/02/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120	Schwarzbeck	937	02/13/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	895	08/16/2024	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/02/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/19/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/22/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/22/2024	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/23/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual



Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)



6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Peak- to- Average Ratio	§ 24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 24.235	Emission must remain in band	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. EMISSION DESIGNATOR

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18607	18900	19193
				1850.7 MHz	1880 MHz	1909.3 MHz
1.4 MHz	QPSK	1	0	23.51	23.25	23.28
		1	3	23.56	23.40	23.33
		1	5	23.51	23.36	23.23
		3	0	23.54	23.35	23.34
		3	1	23.54	23.40	23.32
		3	3	23.56	23.37	23.35
		6	0	22.66	22.44	22.37
	16QAM	1	0	22.75	22.50	22.46
		1	3	22.98	22.71	22.66
		1	5	22.90	22.63	22.56
		3	0	22.69	22.52	22.49
		3	1	22.80	22.55	22.62
		3	3	22.69	22.55	22.54
		6	0	21.69	21.49	21.45
	64QAM	1	0	21.84	21.63	20.99
		1	3	21.83	21.63	20.94
		1	5	21.88	21.68	20.91
		3	0	21.75	21.44	20.85
		3	1	21.80	21.65	20.81
		3	3	21.70	21.53	20.86
		6	0	20.70	20.43	19.78
	256QAM	1	0	18.87	18.63	18.57
		1	3	18.81	18.64	18.73
		1	5	18.93	18.59	18.70
		3	0	18.79	18.62	18.42
		3	1	18.74	18.71	18.65
		3	3	18.69	18.58	18.55
		6	0	18.71	18.49	18.48

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18615	18900	19185
				1851.5 MHz	1880 MHz	1908.5 MHz
3 MHz	QPSK	1	0	23.63	23.35	23.27
		1	7	23.62	23.38	23.21
		1	14	23.57	23.45	23.23
		8	0	22.69	22.39	22.44
		8	3	22.69	22.57	22.54
		8	7	22.72	22.49	22.44
		15	0	22.63	22.50	22.41
	16QAM	1	0	22.92	22.53	22.60
		1	7	22.84	22.59	22.56
		1	14	22.90	22.90	22.69
		8	0	21.76	21.52	21.56
		8	3	21.82	21.64	21.59
		8	7	21.80	21.59	21.55
		15	0	21.74	21.55	21.50
	64QAM	1	0	21.76	21.65	20.95
		1	7	21.88	21.74	20.93
		1	14	21.91	21.72	20.93
		8	0	20.74	20.57	19.84
		8	3	20.74	20.63	19.86
		8	7	20.76	20.52	19.83
		15	0	20.78	20.57	19.83
	256QAM	1	0	19.07	18.47	18.64
		1	7	18.66	19.12	18.62
		1	14	18.99	18.63	18.67
		8	0	18.73	18.47	18.49
		8	3	18.78	18.62	18.62
		8	7	18.68	18.65	18.59
		15	0	18.75	18.58	18.58

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18625	18900	19175
				1852.5 MHz	1880 MHz	1907.5 MHz
5 MHz	QPSK	1	0	23.58	23.36	23.33
		1	12	23.59	23.40	23.33
		1	24	23.64	23.40	23.35
		12	0	22.69	22.41	22.37
		12	6	22.71	22.49	22.43
		12	11	22.68	22.48	22.45
		25	0	22.71	22.48	22.41
	16QAM	1	0	22.88	22.57	22.61
		1	12	22.90	22.92	22.52
		1	24	22.89	22.61	22.66
		12	0	21.78	21.54	21.39
		12	6	21.75	21.59	21.49
		12	11	21.75	21.61	21.50
		25	0	21.69	21.54	21.43
	64QAM	1	0	21.85	21.69	21.06
		1	12	21.90	21.66	20.95
		1	24	21.91	21.66	20.89
		12	0	20.69	20.55	19.85
		12	6	20.76	20.62	19.87
		12	11	20.75	20.54	19.85
		25	0	20.74	20.55	19.78
	256QAM	1	0	18.75	18.68	18.65
		1	12	18.82	18.71	18.83
		1	24	18.89	18.76	18.81
		12	0	18.73	18.56	18.48
		12	6	18.81	18.59	18.52
		12	11	18.77	18.59	18.59
		25	0	18.69	18.60	18.45

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18650	18900	19150
				1855 MHz	1880 MHz	1905 MHz
10 MHz	QPSK	1	0	23.41	23.31	23.30
		1	24	23.64	23.34	23.36
		1	49	23.58	23.42	23.23
		25	0	22.60	22.47	22.44
		25	12	22.68	22.53	22.45
		25	24	22.72	22.54	22.52
		50	0	22.70	22.52	22.41
	16QAM	1	0	22.80	22.89	22.79
		1	24	22.86	22.56	22.65
		1	49	22.90	22.63	22.75
		25	0	21.70	21.47	21.41
		25	12	21.71	21.59	21.52
		25	24	21.73	21.57	21.54
		50	0	21.68	21.52	21.42
	64QAM	1	0	21.87	21.43	21.38
		1	24	21.83	21.51	21.01
		1	49	21.83	21.84	20.90
		25	0	20.73	20.60	20.02
		25	12	20.75	20.56	19.95
		25	24	20.70	20.56	19.84
		50	0	20.78	20.50	19.90
	256QAM	1	0	18.85	18.62	18.75
		1	24	18.83	18.73	18.71
		1	49	18.79	18.69	18.48
		25	0	18.72	18.50	18.46
		25	12	18.69	18.65	18.51
		25	24	18.73	18.62	18.58
		50	0	18.79	18.66	18.57

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18675	18900	19125
				1857.5 MHz	1880 MHz	1902.5 MHz
15 MHz	QPSK	1	0	23.52	23.42	23.53
		1	36	23.54	23.40	23.35
		1	74	23.52	23.45	23.32
		36	0	22.70	22.52	22.40
		36	18	22.73	22.59	22.49
		36	39	22.75	22.59	22.50
		75	0	22.74	22.60	22.52
	16QAM	1	0	22.97	22.80	22.79
		1	36	23.08	22.77	22.76
		1	74	22.83	22.58	22.60
		36	0	21.80	21.54	21.48
		36	18	21.75	21.61	21.49
		36	39	21.80	21.63	21.59
		75	0	21.76	21.62	21.51
	64QAM	1	0	21.87	21.56	21.70
		1	36	21.93	21.83	21.16
		1	74	21.97	21.77	20.93
		36	0	20.74	20.55	20.44
		36	18	20.77	20.70	20.21
		36	39	20.73	20.68	20.00
		75	0	20.80	20.69	20.13
	256QAM	1	0	18.70	18.64	18.65
		1	36	19.06	18.71	18.69
		1	74	18.79	18.89	18.75
		36	0	18.71	18.52	18.54
		36	18	18.78	18.65	18.58
		36	39	18.85	18.64	18.59
		75	0	18.78	18.54	18.42

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18700	18900	19100
				1860 MHz	1880 MHz	1900 MHz
20 MHz	QPSK	1	0	23.64	23.58	23.38
		1	49	23.53	23.44	23.36
		1	99	23.46	23.42	23.39
		50	0	22.70	22.52	22.45
		50	25	22.72	22.61	22.53
		50	49	22.72	22.58	22.52
		100	0	22.75	22.61	22.50
	16QAM	1	0	22.74	22.87	22.70
		1	49	22.84	22.71	22.59
		1	99	22.84	22.67	22.74
		50	0	21.78	21.55	21.49
		50	25	21.75	21.67	21.61
		50	49	21.75	21.57	21.60
		100	0	21.77	21.66	21.54
	64QAM	1	0	21.86	21.77	21.68
		1	49	21.77	21.82	21.26
		1	99	21.91	21.83	20.98
		50	0	20.75	20.55	20.47
		50	25	20.78	20.64	20.39
		50	49	20.77	20.61	20.08
		100	0	20.76	20.67	20.27
	256QAM	1	0	18.90	18.63	18.44
		1	49	18.81	18.59	18.47
		1	99	18.70	18.70	18.57
		50	0	18.81	18.57	18.54
		50	25	18.81	18.65	18.58
		50	49	18.78	18.57	18.66
		100	0	18.77	18.64	18.58

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

8.2.1 External Antenna

Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
1850.7	LTE B2/ 1.4 MHz	QPSK	89.72	32.45	122.17	V	< 2.00	0.498	26.97	1	5
		16-QAM	88.93	32.45	121.38	V		0.415	26.18		
		64-QAM	86.86	32.45	119.31	V		0.258	24.11		
		256-QAM	84.87	32.45	117.32	V		0.163	22.12		
1880.0		QPSK	89.65	32.77	122.42	V		0.527	27.22	1	0
		16-QAM	89.00	32.77	121.77	V		0.454	26.57		
		64-QAM	87.15	32.77	119.92	V		0.296	24.72		
		256-QAM	84.72	32.77	117.49	V		0.169	22.29		
1909.3		QPSK	87.35	33.14	120.49	V		0.338	25.29	1	0
		16-QAM	86.75	33.14	119.89	V		0.294	24.69		
		64-QAM	84.75	33.14	117.89	V		0.186	22.69		
		256-QAM	83.45	33.14	116.59	V		0.138	21.39		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
1851.5	LTE B2/ 3 MHz	QPSK	89.27	32.45	121.72	V	< 2.00	0.449	26.52	1	14
		16-QAM	88.63	32.45	121.08	V		0.387	25.88		
		64-QAM	86.55	32.45	119.00	V		0.240	23.80		
		256-QAM	84.42	32.45	116.87	V		0.147	21.67		
1880.0		QPSK	89.38	32.77	122.15	V		0.495	26.95	1	0
		16-QAM	88.78	32.77	121.55	V		0.432	26.35		
		64-QAM	87.27	32.77	120.04	V		0.305	24.84		
		256-QAM	84.56	32.77	117.33	V		0.163	22.13		
1908.5		QPSK	86.65	33.12	119.77	V		0.286	24.57	1	0
		16-QAM	85.89	33.12	119.01	V		0.240	23.81		
		64-QAM	83.80	33.12	116.92	V		0.149	21.72		
		256-QAM	82.55	33.12	115.67	V		0.111	20.47		



Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1852.5		QPSK	89.36	32.46	121.82	V	< 2.00	0.459	26.62	1	24	
		16-QAM	88.67	32.46	121.13	V		0.391	25.93			
		64-QAM	87.07	32.46	119.53	V		0.271	24.33			
		256-QAM	84.55	32.46	117.01	V		0.152	21.81			
1880.0	LTE B2/ 5 MHz	QPSK	89.65	32.77	122.42	V		0.527	27.22	1	0	
		16-QAM	88.92	32.77	121.69	V		0.446	26.49			
		64-QAM	87.45	32.77	120.22	V		0.318	25.02			
		256-QAM	84.75	32.77	117.52	V		0.171	22.32			
1907.5		QPSK	87.05	33.10	120.15	V		0.313	24.95	1	0	
		16-QAM	86.39	33.10	119.49	V		0.269	24.29			
		64-QAM	84.25	33.10	117.35	V		0.164	22.15			
		256-QAM	83.16	33.10	116.26	V		0.128	21.06			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1855.0		QPSK	89.79	32.47	122.26	V	< 2.00	0.508	27.06	1	49	
		16-QAM	89.06	32.47	121.53	V		0.430	26.33			
		64-QAM	87.05	32.47	119.52	V		0.270	24.32			
		256-QAM	84.94	32.47	117.41	V		0.166	22.21			
1880.0	LTE B2/ 10 MHz	QPSK	89.68	32.77	122.45	V		0.531	27.25	1	0	
		16-QAM	88.95	32.77	121.72	V		0.449	26.52			
		64-QAM	87.51	32.77	120.28	V		0.322	25.08			
		256-QAM	84.82	32.77	117.59	V		0.173	22.39			
1905.0		QPSK	87.22	33.06	120.28	V		0.322	25.08	1	0	
		16-QAM	86.56	33.06	119.62	V		0.277	24.42			
		64-QAM	84.54	33.06	117.60	V		0.174	22.40			
		256-QAM	82.99	33.06	116.05	V		0.122	20.85			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1857.5	LTE B2/ 15 MHz	QPSK	89.76	32.53	122.29	V	< 2.00	0.512	27.09	1	74	
		16-QAM	89.05	32.53	121.58	V		0.435	26.38			
		64-QAM	87.18	32.53	119.71	V		0.282	24.51			
		256-QAM	85.00	32.53	117.53	V		0.171	22.33			
1880.0		QPSK	89.25	32.77	122.02	V		0.481	26.82	1	0	
		16-QAM	88.51	32.77	121.28	V		0.406	26.08			
		64-QAM	87.37	32.77	120.14	V		0.312	24.94			
		256-QAM	84.25	32.77	117.02	V		0.152	21.82			
1902.5		QPSK	87.73	33.06	120.79	V		0.362	25.59	1	0	
		16-QAM	87.05	33.06	120.11	V		0.310	24.91			
		64-QAM	85.09	33.06	118.15	V		0.197	22.95			
		256-QAM	83.23	33.06	116.29	V		0.129	21.09			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1860.0	LTE B2/ 20 MHz	QPSK	89.40	32.58	121.98	V	< 2.00	0.476	26.78	1	99	
		16-QAM	88.65	32.58	121.23	V		0.401	26.03			
		64-QAM	86.81	32.58	119.39	V		0.262	24.19			
		256-QAM	84.71	32.58	117.29	V		0.162	22.09			
1880.0		QPSK	89.53	32.77	122.30	V		0.513	27.10	1	0	
		16-QAM	88.85	32.77	121.62	V		0.439	26.42			
		64-QAM	87.50	32.77	120.27	V		0.321	25.07			
		256-QAM	84.73	32.77	117.50	V		0.170	22.30			
1900.0		QPSK	88.12	33.07	121.19	V		0.397	25.99	1	0	
		16-QAM	87.45	33.07	120.52	V		0.340	25.32			
		64-QAM	85.53	33.07	118.60	V		0.219	23.40			
		256-QAM	83.37	33.07	116.44	V		0.133	21.24			

8.2.2 Internal Antenna

Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1850.7		QPSK	89.78	32.45	122.23	V	< 2.00	0.505	27.03	1	3	
		16-QAM	89.24	32.45	121.69	V		0.446	26.49			
		64-QAM	88.10	32.45	120.55	V		0.343	25.35			
		256-QAM	85.06	32.45	117.51	V		0.170	22.31			
1880.0	LTE B2/ 1.4 MHz	QPSK	88.38	32.77	121.15	V		0.394	25.95	1	0	
		16-QAM	87.79	32.77	120.56	V		0.344	25.36			
		64-QAM	86.61	32.77	119.38	V		0.262	24.18			
		256-QAM	83.58	32.77	116.35	V		0.130	21.15			
1909.3		QPSK	87.05	33.14	120.19	V		0.316	24.99	1	0	
		16-QAM	86.47	33.14	119.61	V		0.276	24.41			
		64-QAM	85.29	33.14	118.43	V		0.210	23.23			
		256-QAM	82.29	33.14	115.43	V		0.105	20.23			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1851.5		QPSK	89.95	32.45	122.40	V	< 2.00	0.525	27.20	1	8	
		16-QAM	89.28	32.45	121.73	V		0.450	26.53			
		64-QAM	87.84	32.45	120.29	V		0.323	25.09			
		256-QAM	85.10	32.45	117.55	V		0.172	22.35			
1880.0	LTE B2/ 3 MHz	QPSK	88.53	32.77	121.30	V		0.407	26.10	1	0	
		16-QAM	87.85	32.77	120.62	V		0.348	25.42			
		64-QAM	86.44	32.77	119.21	V		0.252	24.01			
		256-QAM	83.68	32.77	116.45	V		0.133	21.25			
1908.5		QPSK	86.87	33.12	119.99	V		0.301	24.79	1	0	
		16-QAM	86.21	33.12	119.33	V		0.259	24.13			
		64-QAM	85.06	33.12	118.18	V		0.199	22.98			
		256-QAM	82.06	33.12	115.18	V		0.100	19.98			



Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1852.5	LTE B2/ 5 MHz	QPSK	89.97	32.46	122.43	V	< 2.00	0.528	27.23	1	13	
		16-QAM	89.25	32.46	121.71	V		0.448	26.51			
		64-QAM	88.12	32.46	120.58	V		0.345	25.38			
		256-QAM	85.12	32.46	117.58	V		0.173	22.38			
1880.0		QPSK	88.67	32.77	121.44	V		0.421	26.24	1	0	
		16-QAM	87.97	32.77	120.74	V		0.358	25.54			
		64-QAM	86.87	32.77	119.64	V		0.278	24.44			
		256-QAM	83.84	32.77	116.61	V		0.138	21.41			
1907.5		QPSK	86.90	33.10	120.00	V		0.302	24.80	1	0	
		16-QAM	86.31	33.10	119.41	V		0.264	24.21			
		64-QAM	85.03	33.10	118.13	V		0.196	22.93			
		256-QAM	82.13	33.10	115.23	V		0.101	20.03			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dB μ V)	A.F+C.L+D.F (dB/m)	Total (dB μ V/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1855.0	LTE B2/ 10 MHz	QPSK	89.55	32.47	122.02	V	< 2.00	0.481	26.82	1	0	
		16-QAM	88.78	32.47	121.25	V		0.403	26.05			
		64-QAM	87.63	32.47	120.10	V		0.309	24.90			
		256-QAM	84.65	32.47	117.12	V		0.156	21.92			
1880.0		QPSK	88.55	32.77	121.32	V		0.409	26.12	1	0	
		16-QAM	87.74	32.77	120.51	V		0.340	25.31			
		64-QAM	85.48	32.77	118.25	V		0.202	23.05			
		256-QAM	83.93	32.77	116.70	V		0.141	21.50			
1905.0		QPSK	87.31	33.06	120.37	V		0.329	25.17	1	0	
		16-QAM	86.64	33.06	119.70	V		0.282	24.50			
		64-QAM	84.72	33.06	117.78	V		0.181	22.58			
		256-QAM	82.60	33.06	115.66	V		0.111	20.46			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1857.5		QPSK	89.15	32.53	121.68	V	< 2.00	0.445	26.48	1	0	
		16-QAM	88.43	32.53	120.96	V		0.377	25.76			
		64-QAM	87.45	32.53	119.98	V		0.301	24.78			
		256-QAM	84.45	32.53	116.98	V		0.151	21.78			
1880.0	LTE B2/ 15 MHz	QPSK	88.60	32.77	121.37	V	< 2.00	0.414	26.17	1	0	
		16-QAM	87.95	32.77	120.72	V		0.357	25.52			
		64-QAM	86.63	32.77	119.40	V		0.263	24.20			
		256-QAM	83.75	32.77	116.52	V		0.136	21.32			
1902.5		QPSK	87.18	33.06	120.24	V	< 2.00	0.319	25.04	1	0	
		16-QAM	86.54	33.06	119.60	V		0.275	24.40			
		64-QAM	84.54	33.06	117.60	V		0.174	22.40			
		256-QAM	82.59	33.06	115.65	V		0.111	20.45			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit		EIRP		RB	
							W	W	dBm	Size	Offset	
1860.0		QPSK	89.15	32.58	121.73	V	< 2.00	0.450	26.53	1	0	
		16-QAM	88.38	32.58	120.96	V		0.377	25.76			
		64-QAM	87.43	32.58	120.01	V		0.303	24.81			
		256-QAM	84.42	32.58	117.00	V		0.151	21.80			
1880.0	LTE B2/ 20 MHz	QPSK	88.84	32.77	121.61	V	< 2.00	0.438	26.41	1	0	
		16-QAM	88.24	32.77	121.01	V		0.381	25.81			
		64-QAM	86.70	32.77	119.47	V		0.267	24.27			
		256-QAM	84.04	32.77	116.81	V		0.145	21.61			
1900.0		QPSK	87.79	33.07	120.86	V	< 2.00	0.368	25.66	1	0	
		16-QAM	87.27	33.07	120.34	V		0.327	25.14			
		64-QAM	86.09	33.07	119.16	V		0.249	23.96			
		256-QAM	82.98	33.07	116.05	V		0.122	20.85			

8.3 RADIATED SPURIOUS EMISSIONS

8.3.1 External Antenna

- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.00 dBm

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
18650 (1855.0)	3 710.00	71.91	-11.64	60.27	V	-34.93	-13.00	1	49
	5 565.00	66.09	-7.14	58.95	V	-36.25	-13.00		
	7 420.00	51.06	-0.65	50.41	V	-44.79	-13.00		
	9 275.00	48.75	3.91	52.66	V	-42.54	-13.00		
	11 130.00	48.51	5.78	54.29	V	-40.91	-13.00		
18900 (1880.0)	3 760.00	71.52	-11.57	59.95	V	-35.25	-13.00	1	0
	5 640.00	68.21	-6.89	61.32	V	-33.88	-13.00		
	7 520.00	50.57	-0.82	49.76	V	-45.45	-13.00		
	9 400.00	48.96	3.50	52.46	V	-42.74	-13.00		
	11 280.00	48.70	5.54	54.24	V	-40.97	-13.00		
19150 (1905.0)	3 810.00	71.36	-11.48	59.88	V	-35.32	-13.00	1	0
	5 715.00	62.91	-6.70	56.21	V	-38.99	-13.00		
	7 620.00	50.80	-1.13	49.67	V	-45.53	-13.00		
	9 525.00	49.05	3.75	52.80	V	-42.40	-13.00		
	11 430.00	48.62	5.88	54.50	V	-40.70	-13.00		

8.3.2 Internal Antenna

- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.00 dBm

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
18625 (1852.5)	3 705.00	65.51	-11.65	53.86	V	-41.34	-13.00	1	13
	5 557.50	66.95	-7.25	59.70	H	-35.50	-13.00		
	7 410.00	55.19	-0.65	54.54	H	-40.66	-13.00		
18900 (1880.0)	3 760.00	63.17	-11.57	51.60	V	-43.60	-13.00	1	0
	5 640.00	62.70	-6.89	55.81	H	-39.39	-13.00		
	7 520.00	54.32	-0.82	53.51	V	-41.70	-13.00		
19175 (1907.5)	3 815.00	66.48	-11.45	55.03	H	-40.17	-13.00	1	0
	5 722.50	60.07	-6.67	53.41	H	-41.80	-13.00		
	7 630.00	54.77	-1.14	53.63	V	-41.57	-13.00		

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.40
			16-QAM			6.12
			64-QAM			6.76
			256-QAM			6.74
	3 MHz		QPSK	15		5.35
			16-QAM			6.09
			64-QAM			6.62
			256-QAM			6.69
	5 MHz		QPSK	25		5.33
			16-QAM			6.07
			64-QAM			6.61
			256-QAM			6.65
	10 MHz		QPSK	50		5.38
			16-QAM			6.07
			64-QAM			6.55
			256-QAM			6.68
	15 MHz		QPSK	75		5.34
			16-QAM			6.07
			64-QAM			6.59
			256-QAM			6.62
20 MHz	QPSK	100	5.28			
	16-QAM		6.04			
	64-QAM		6.59			
	256-QAM		6.63			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 123 ~ 146.



8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0922
			16-QAM			1.0906
			64-QAM			1.0926
			256-QAM			1.0925
	3 MHz		QPSK	15		2.7060
			16-QAM			2.6992
			64-QAM			2.7028
			256-QAM			2.7201
	5 MHz		QPSK	25		4.5199
			16-QAM			4.4933
			64-QAM			4.5192
			256-QAM			4.4951
	10 MHz		QPSK	50		8.9700
			16-QAM			8.9734
			64-QAM			8.9729
			256-QAM			8.9741
	15 MHz		QPSK	75		13.448
			16-QAM			13.460
			64-QAM			13.444
			256-QAM			13.437
20 MHz	QPSK	100	17.920			
	16-QAM		17.956			
	64-QAM		17.928			
	256-QAM		17.920			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 99 ~ 122.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.1805	27.976	-77.471	-49.495	-13.00
		1880.0	3.6855	27.976	-77.089	-49.113	
		1909.3	3.6980	27.976	-77.516	-49.540	
	3	1851.5	3.6845	27.976	-77.495	-49.519	
		1880.0	3.7189	27.976	-77.398	-49.422	
		1908.5	3.6885	27.976	-77.301	-49.325	
	5	1852.5	3.6840	27.976	-77.224	-49.248	
		1880.0	3.7184	27.976	-77.113	-49.137	
		1907.5	3.7129	27.976	-77.570	-49.594	
	10	1855.0	3.6945	27.976	-77.227	-49.251	
		1880.0	3.7000	27.976	-77.218	-49.242	
		1905.0	3.6935	27.976	-77.543	-49.567	
	15	1857.5	3.7094	27.976	-77.090	-49.114	
		1880.0	3.7174	27.976	-77.573	-49.597	
		1902.5	3.6965	27.976	-76.655	-48.679	
	20	1860.0	3.7094	27.976	-77.141	-49.165	
		1880.0	3.6810	27.976	-77.288	-49.312	
		1900.0	3.7134	27.976	-77.373	-49.397	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 147 ~ 182.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 63 ~ 98.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1850 700 005	0.0	0.000 000	0.000
100%		-30	1850 699 997	-7.9	0.000 000	-0.004
100%		-20	1850 700 013	7.9	0.000 000	0.004
100%		-10	1850 699 997	-8.0	0.000 000	-0.004
100%		0	1850 700 012	6.8	0.000 000	0.004
100%		+10	1850 699 997	-7.7	0.000 000	-0.004
100%		+30	1850 700 012	7.2	0.000 000	0.004
100%		+40	1850 699 998	-6.9	0.000 000	-0.004
100%		+50	1850 699 989	-16.1	-0.000 001	-0.009
85%		11.475	+20	1850 699 994	-11.0	-0.000 001
115%	15.525	+20	1850 699 996	-8.4	0.000 000	-0.005

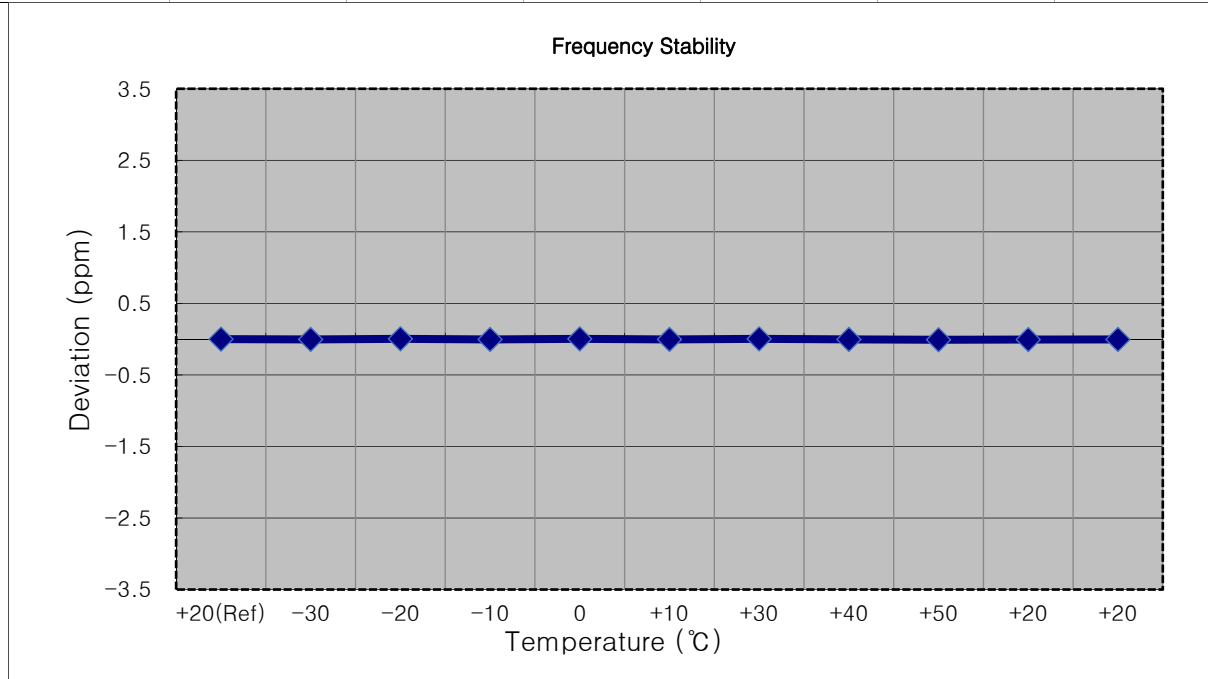


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1851 500 008	0.0	0.000 000	0.000
100%		-30	1851 500 020	11.2	0.000 001	0.006
100%		-20	1851 500 004	-4.5	0.000 000	-0.002
100%		-10	1851 499 998	-10.2	-0.000 001	-0.006
100%		0	1851 499 996	-12.5	-0.000 001	-0.007
100%		+10	1851 500 015	6.7	0.000 000	0.004
100%		+30	1851 500 011	2.2	0.000 000	0.001
100%		+40	1851 500 002	-6.9	0.000 000	-0.004
100%		+50	1851 499 997	-11.2	-0.000 001	-0.006
85%		11.475	+20	1851 500 000	-8.4	0.000 000
115%	15.525	+20	1851 500 003	-5.9	0.000 000	-0.003

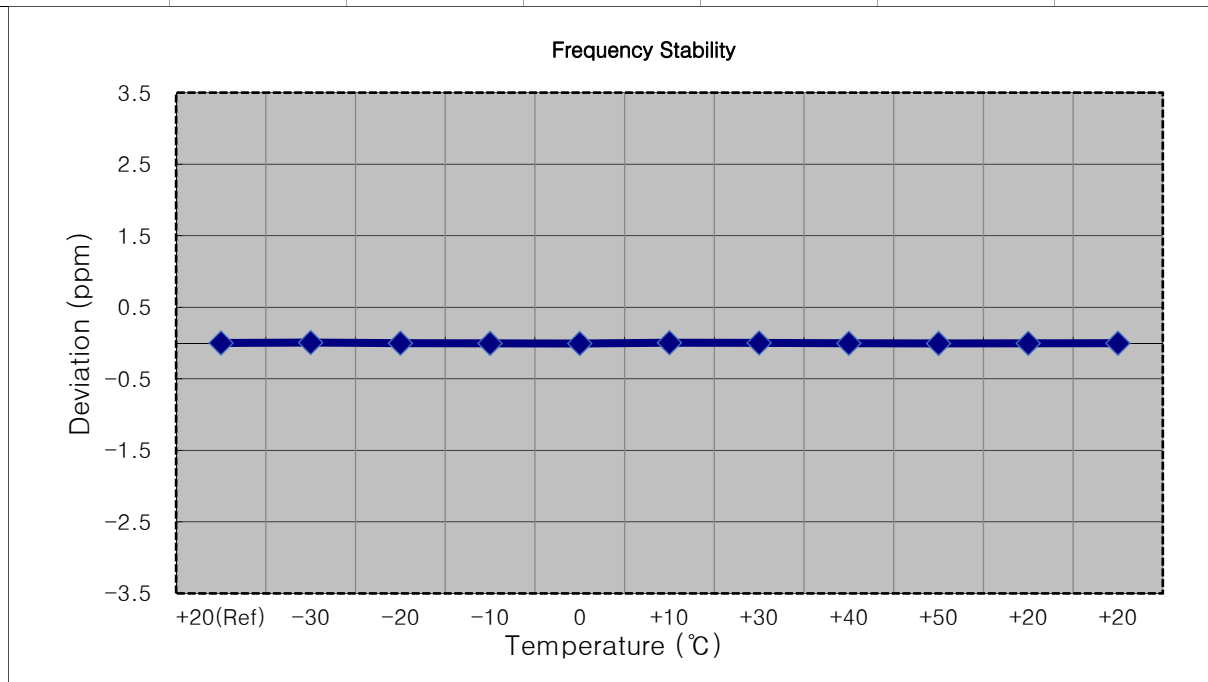


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1852 499 991	0.0	0.000 000	0.000
100%		-30	1852 499 980	-11.5	-0.000 001	-0.006
100%		-20	1852 500 001	10.3	0.000 001	0.006
100%		-10	1852 499 995	4.4	0.000 000	0.002
100%		0	1852 499 986	-5.2	0.000 000	-0.003
100%		+10	1852 499 983	-8.4	0.000 000	-0.005
100%		+30	1852 499 977	-13.7	-0.000 001	-0.007
100%		+40	1852 499 998	6.7	0.000 000	0.004
100%		+50	1852 499 998	7.3	0.000 000	0.004
85%		11.475	+20	1852 499 998	6.5	0.000 000
115%	15.525	+20	1852 500 000	9.1	0.000 000	0.005

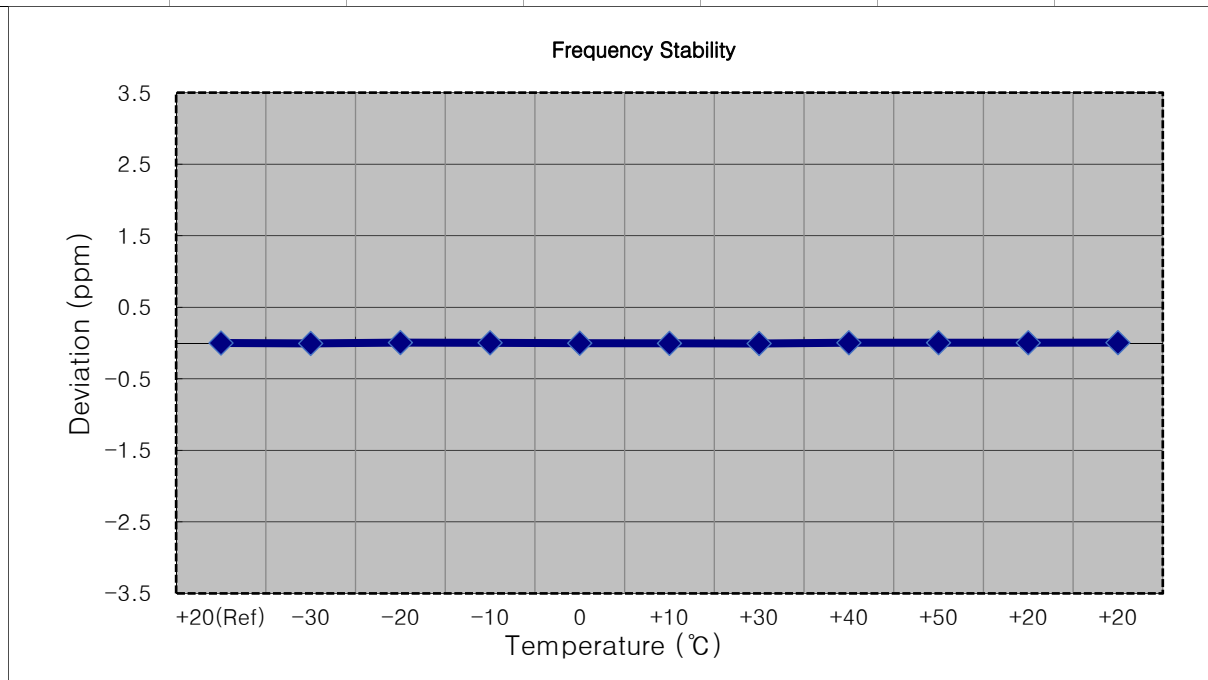

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1854 999 995	0.0	0.000 000	0.000
100%		-30	1854 999 986	-9.0	0.000 000	-0.005
100%		-20	1855 000 002	7.6	0.000 000	0.004
100%		-10	1854 999 998	3.5	0.000 000	0.002
100%		0	1854 999 987	-7.5	0.000 000	-0.004
100%		+10	1854 999 985	-9.9	-0.000 001	-0.005
100%		+30	1855 000 003	8.2	0.000 000	0.004
100%		+40	1855 000 002	6.9	0.000 000	0.004
100%		+50	1854 999 990	-4.4	0.000 000	-0.002
85%		11.475	+20	1854 999 991	-3.8	0.000 000
115%	15.525	+20	1855 000 000	4.9	0.000 000	0.003

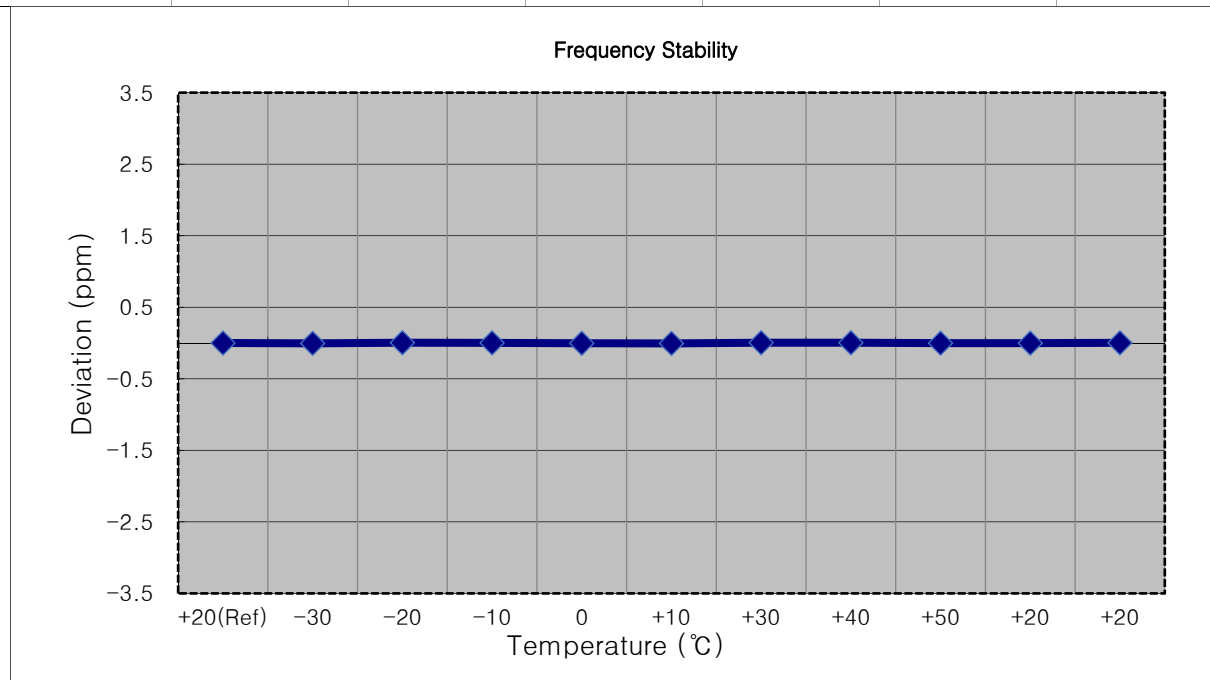




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1857 500 003	0.0	0.000 000	0.000
100%		-30	1857 499 992	-10.7	-0.000 001	-0.006
100%		-20	1857 500 012	8.4	0.000 000	0.005
100%		-10	1857 500 001	-2.5	0.000 000	-0.001
100%		0	1857 499 995	-7.8	0.000 000	-0.004
100%		+10	1857 499 991	-12.0	-0.000 001	-0.006
100%		+30	1857 500 014	10.8	0.000 001	0.006
100%		+40	1857 500 000	-3.3	0.000 000	-0.002
100%		+50	1857 499 997	-6.2	0.000 000	-0.003
85%		11.475	+20	1857 499 999	-4.6	0.000 000
115%	15.525	+20	1857 499 998	-5.1	0.000 000	-0.003

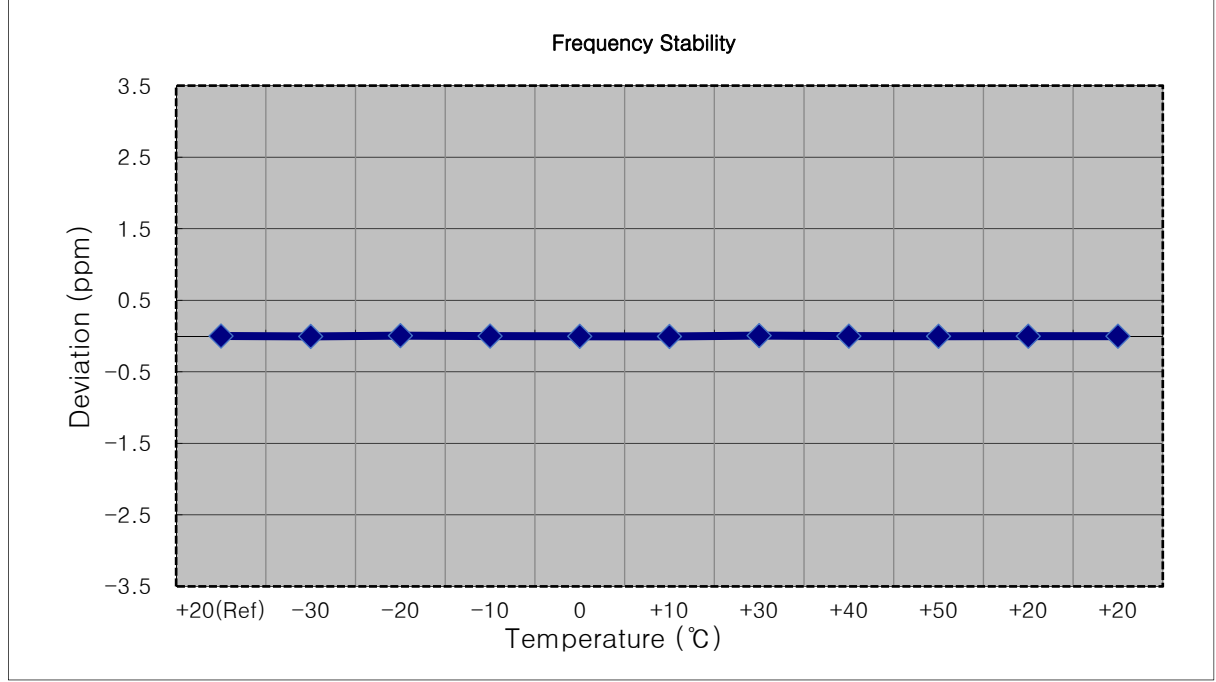

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1859 999 990	0.0	0.000 000	0.000
100%		-30	1859 999 978	-12.1	-0.000 001	-0.007
100%		-20	1859 999 999	8.7	0.000 000	0.005
100%		-10	1859 999 996	6.4	0.000 000	0.003
100%		0	1859 999 997	6.9	0.000 000	0.004
100%		+10	1859 999 998	7.9	0.000 000	0.004
100%		+30	1860 000 000	10.1	0.000 001	0.005
100%		+40	1859 999 977	-12.8	-0.000 001	-0.007
100%		+50	1859 999 977	-12.7	-0.000 001	-0.007
85%		11.475	+20	1859 999 981	-8.9	0.000 000
115%	15.525	+20	1859 999 980	-9.5	-0.000 001	-0.005

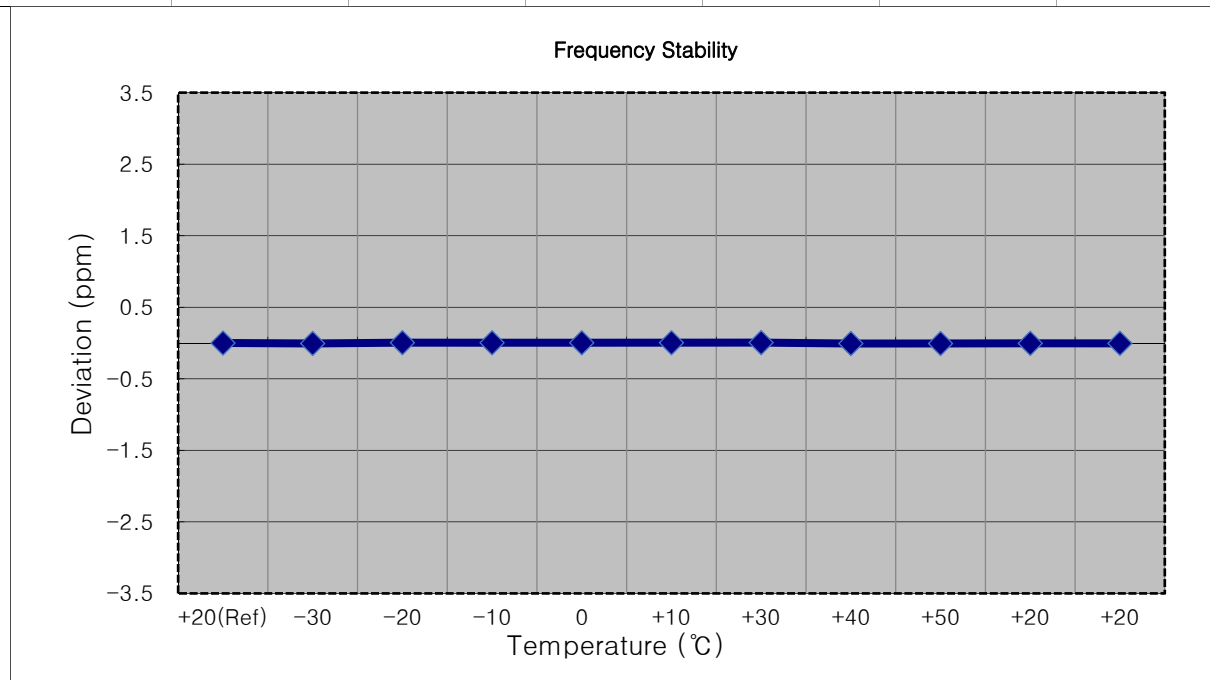




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1880 000 008	0.0	0.000 000	0.000
100%		-30	1880 000 000	-7.7	0.000 000	-0.004
100%		-20	1880 000 015	7.2	0.000 000	0.004
100%		-10	1880 000 004	-3.4	0.000 000	-0.002
100%		0	1879 999 997	-10.6	-0.000 001	-0.006
100%		+10	1880 000 019	10.9	0.000 001	0.006
100%		+30	1880 000 002	-5.6	0.000 000	-0.003
100%		+40	1880 000 019	10.9	0.000 001	0.006
100%		+50	1880 000 014	6.0	0.000 000	0.003
85%		11.475	+20	1880 000 014	5.9	0.000 000
115%	15.525	+20	1880 000 011	3.8	0.000 000	0.002

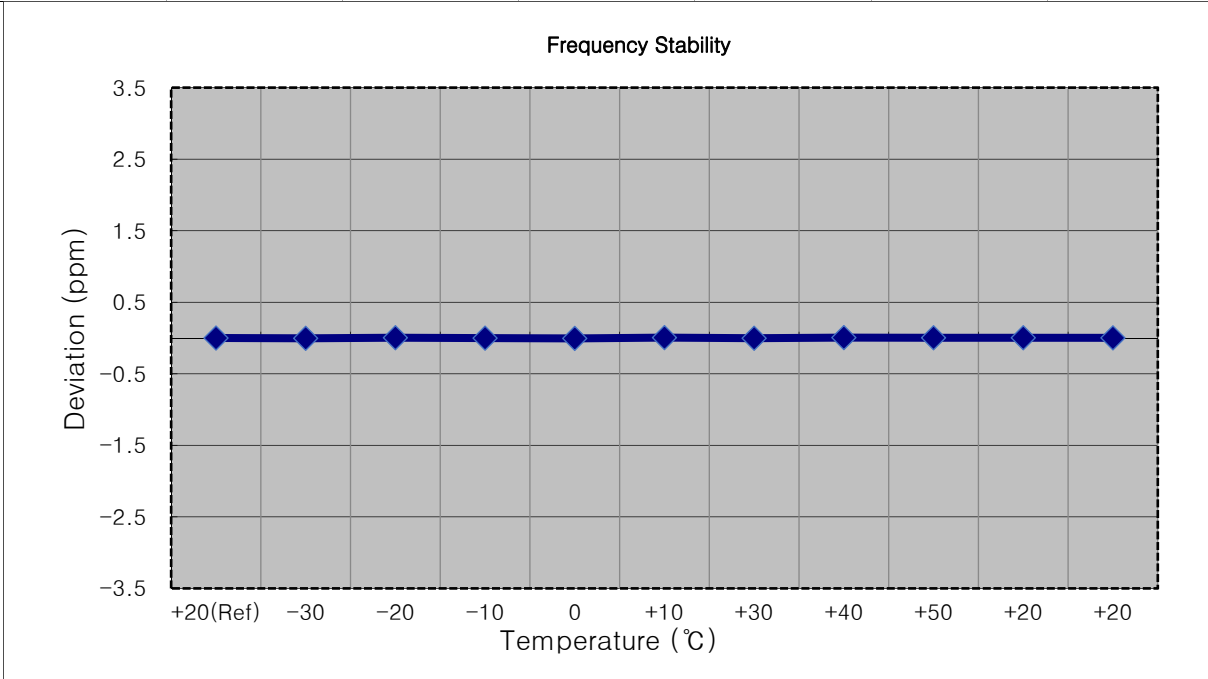

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100%		-30	1879 999 985	-10.6	-0.000 001	-0.006
100%		-20	1880 000 001	6.0	0.000 000	0.003
100%		-10	1879 999 998	3.1	0.000 000	0.002
100%		0	1879 999 990	-5.6	0.000 000	-0.003
100%		+10	1880 000 006	10.5	0.000 001	0.006
100%		+30	1880 000 001	5.5	0.000 000	0.003
100%		+40	1879 999 999	3.6	0.000 000	0.002
100%		+50	1879 999 989	-5.9	0.000 000	-0.003
85%		11.475	+20	1879 999 991	-4.4	0.000 000
115%	15.525	+20	1879 999 993	-1.9	0.000 000	-0.001

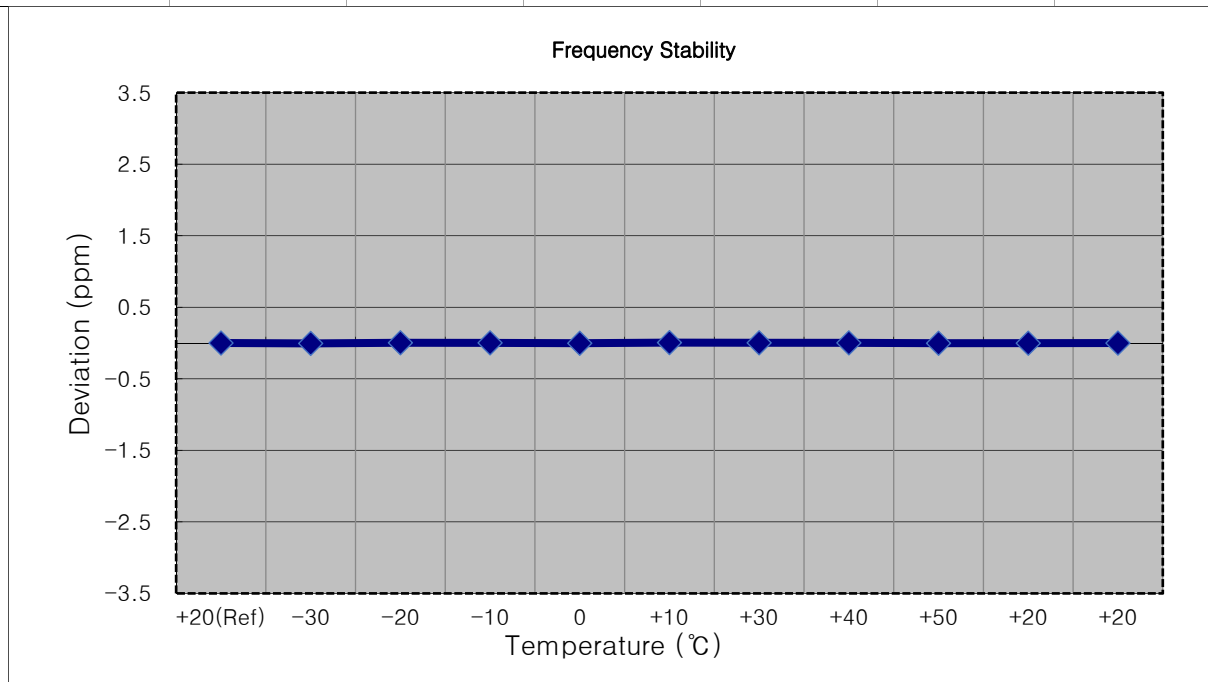




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1880 000 007	0.0	0.000 000	0.000
100%		-30	1880 000 010	2.4	0.000 000	0.001
100%		-20	1880 000 003	-4.6	0.000 000	-0.002
100%		-10	1880 000 001	-6.8	0.000 000	-0.004
100%		0	1879 999 999	-8.7	0.000 000	-0.005
100%		+10	1879 999 994	-13.0	-0.000 001	-0.007
100%		+30	1880 000 014	6.7	0.000 000	0.004
100%		+40	1880 000 011	4.0	0.000 000	0.002
100%		+50	1880 000 012	4.7	0.000 000	0.002
85%		11.475	+20	1880 000 012	5.1	0.000 000
115%	15.525	+20	1880 000 011	3.6	0.000 000	0.002

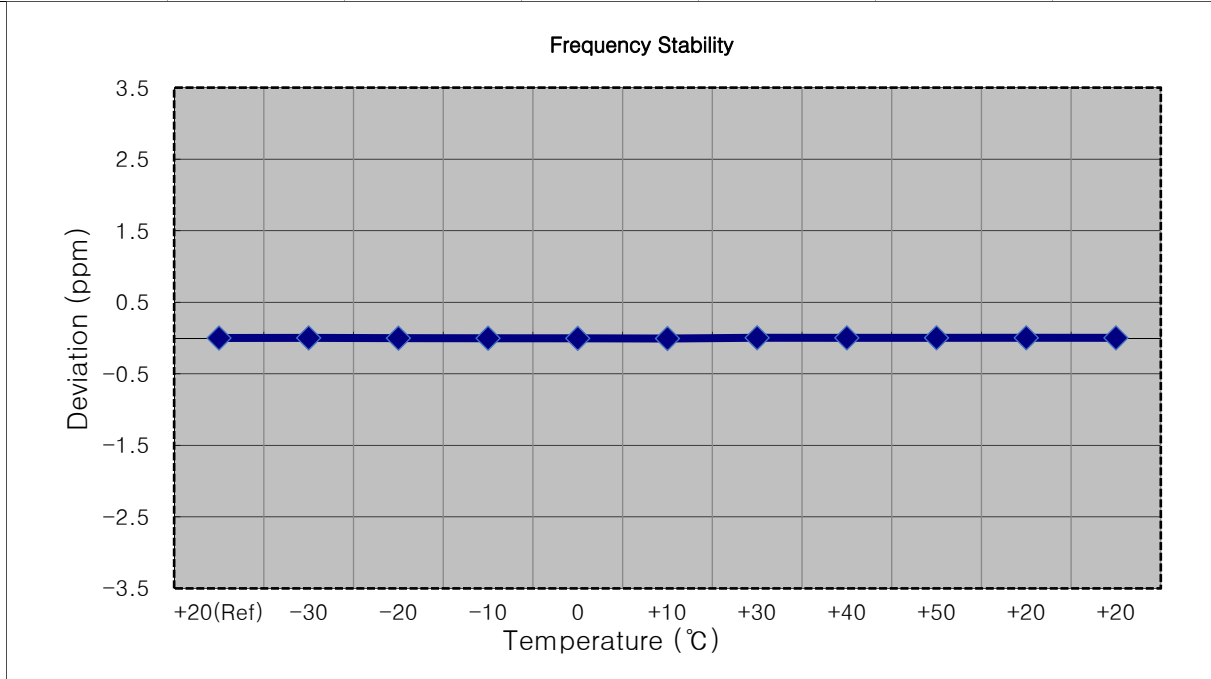

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1880 000 009	0.0	0.000 000	0.000
100%		-30	1880 000 015	5.9	0.000 000	0.003
100%		-20	1880 000 006	-3.2	0.000 000	-0.002
100%		-10	1880 000 000	-8.8	0.000 000	-0.005
100%		0	1880 000 002	-7.3	0.000 000	-0.004
100%		+10	1880 000 000	-9.2	0.000 000	-0.005
100%		+30	1879 999 998	-10.6	-0.000 001	-0.006
100%		+40	1879 999 997	-11.7	-0.000 001	-0.006
100%		+50	1880 000 020	10.5	0.000 001	0.006
85%		11.475	+20	1880 000 018	8.5	0.000 000
115%	15.525	+20	1880 000 016	7.4	0.000 000	0.004

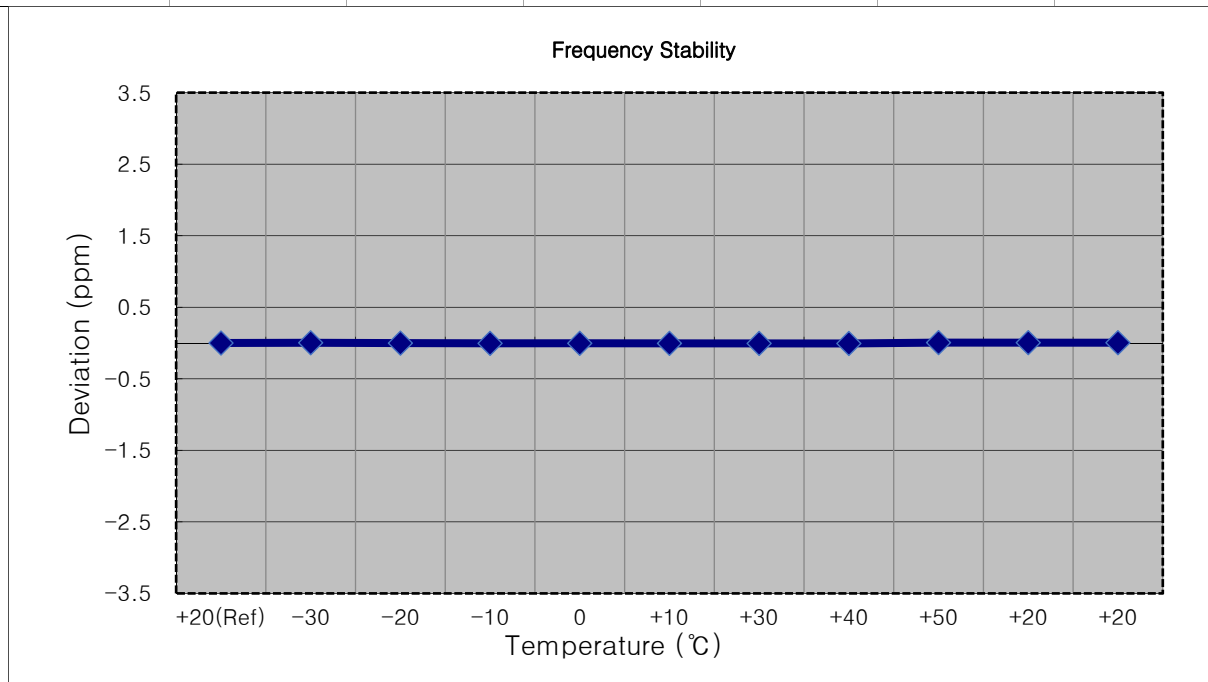



- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1879 999 994	0.0	0.000 000	0.000
100%		-30	1880 000 004	9.7	0.000 001	0.005
100%		-20	1879 999 989	-5.3	0.000 000	-0.003
100%		-10	1879 999 983	-11.5	-0.000 001	-0.006
100%		0	1880 000 000	6.2	0.000 000	0.003
100%		+10	1879 999 996	2.1	0.000 000	0.001
100%		+30	1879 999 991	-3.0	0.000 000	-0.002
100%		+40	1879 999 991	-3.3	0.000 000	-0.002
100%		+50	1879 999 996	1.4	0.000 000	0.001
85%		11.475	+20	1879 999 996	2.2	0.000 000
115%	15.525	+20	1879 999 998	3.8	0.000 000	0.002

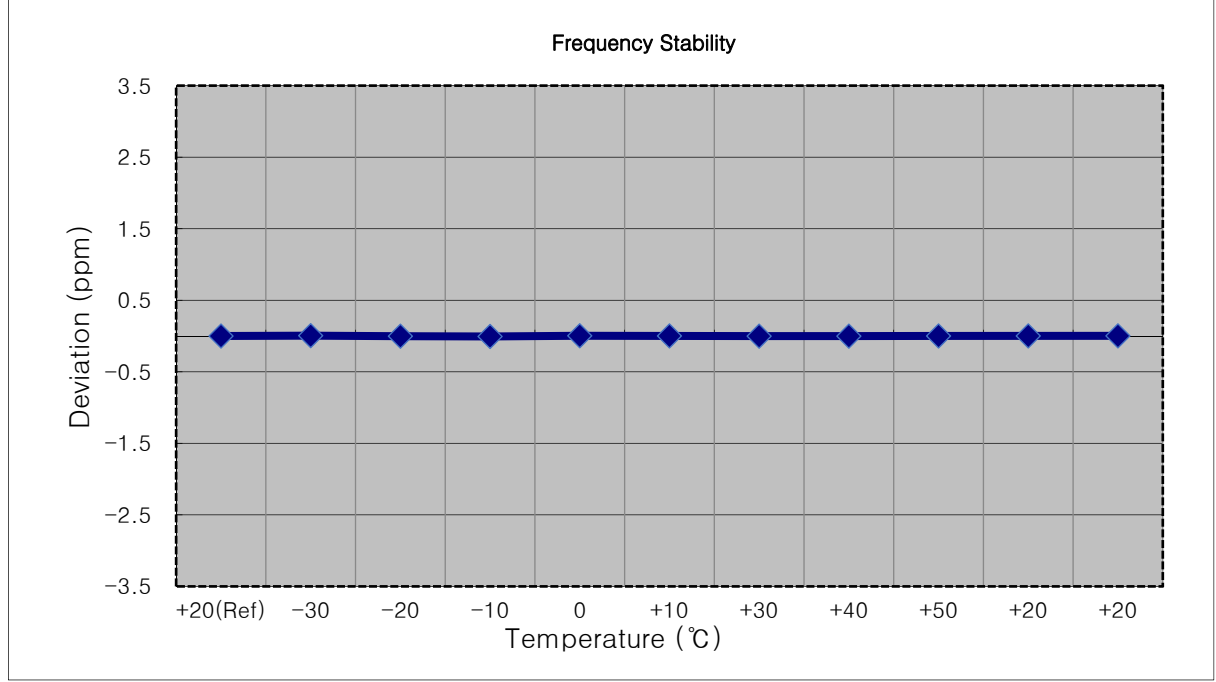



- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100%		-30	1880 000 005	10.0	0.000 001	0.005
100%		-20	1879 999 985	-10.1	-0.000 001	-0.005
100%		-10	1879 999 991	-3.9	0.000 000	-0.002
100%		0	1880 000 005	10.1	0.000 001	0.005
100%		+10	1879 999 983	-11.2	-0.000 001	-0.006
100%		+30	1879 999 999	4.2	0.000 000	0.002
100%		+40	1879 999 981	-13.9	-0.000 001	-0.007
100%		+50	1879 999 990	-4.2	0.000 000	-0.002
85%		11.475	+20	1879 999 988	-6.6	0.000 000
115%	15.525	+20	1879 999 983	-11.8	-0.000 001	-0.006

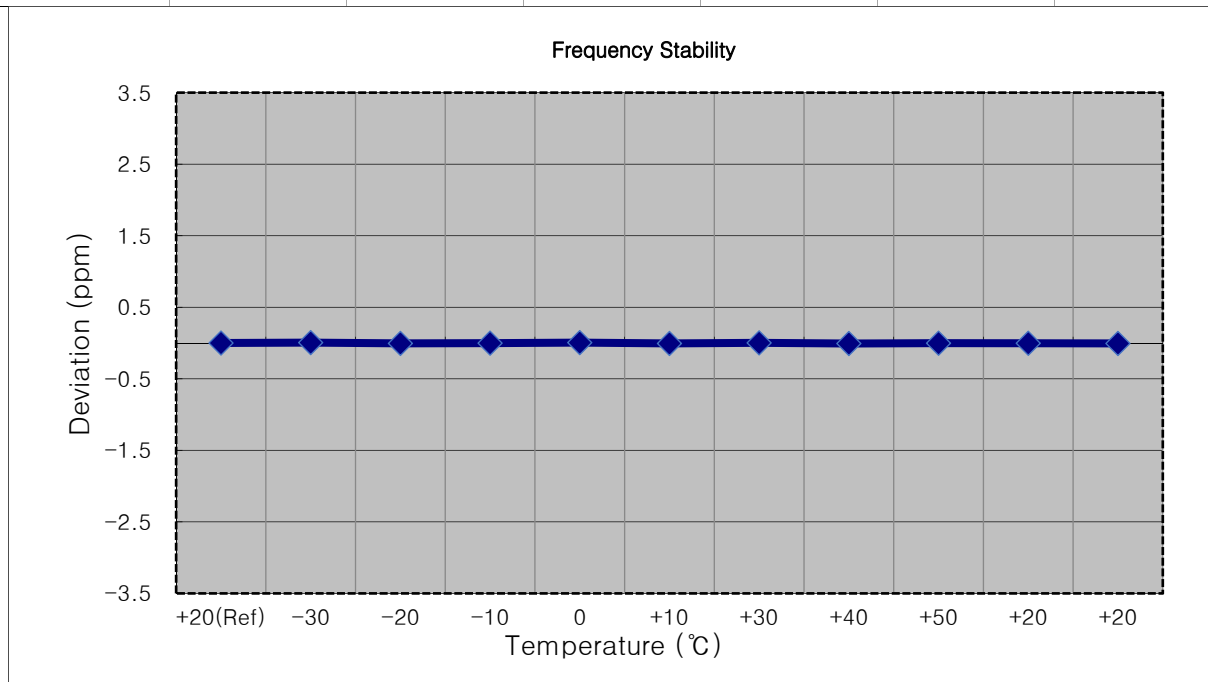




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1909 299 993	0.0	0.000 000	0.000
100%		-30	1909 300 002	9.3	0.000 000	0.005
100%		-20	1909 299 988	-4.2	0.000 000	-0.002
100%		-10	1909 299 982	-11.0	-0.000 001	-0.006
100%		0	1909 300 000	7.5	0.000 000	0.004
100%		+10	1909 299 987	-5.9	0.000 000	-0.003
100%		+30	1909 299 982	-10.8	-0.000 001	-0.006
100%		+40	1909 299 999	6.6	0.000 000	0.003
100%		+50	1909 299 989	-3.7	0.000 000	-0.002
85%		11.475	+20	1909 299 996	2.9	0.000 000
115%	15.525	+20	1909 300 000	7.7	0.000 000	0.004

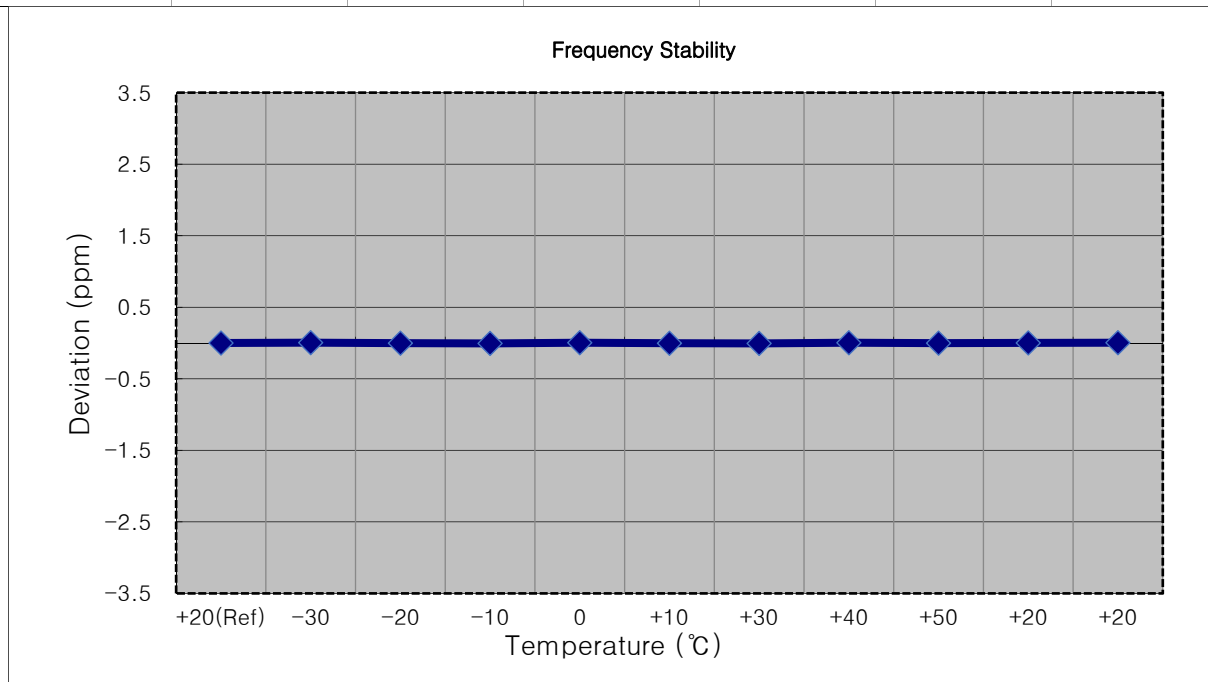

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1908 499 987	0.0	0.000 000	0.000
100%		-30	1908 500 000	13.1	0.000 001	0.007
100%		-20	1908 499 978	-9.3	0.000 000	-0.005
100%		-10	1908 499 974	-13.6	-0.000 001	-0.007
100%		0	1908 500 006	18.5	0.000 001	0.010
100%		+10	1908 499 979	-8.6	0.000 000	-0.005
100%		+30	1908 499 972	-14.8	-0.000 001	-0.008
100%		+40	1908 500 000	12.4	0.000 001	0.006
100%		+50	1908 499 997	10.1	0.000 001	0.005
85%		11.475	+20	1908 499 995	7.8	0.000 000
115%	15.525	+20	1908 499 997	9.4	0.000 000	0.005

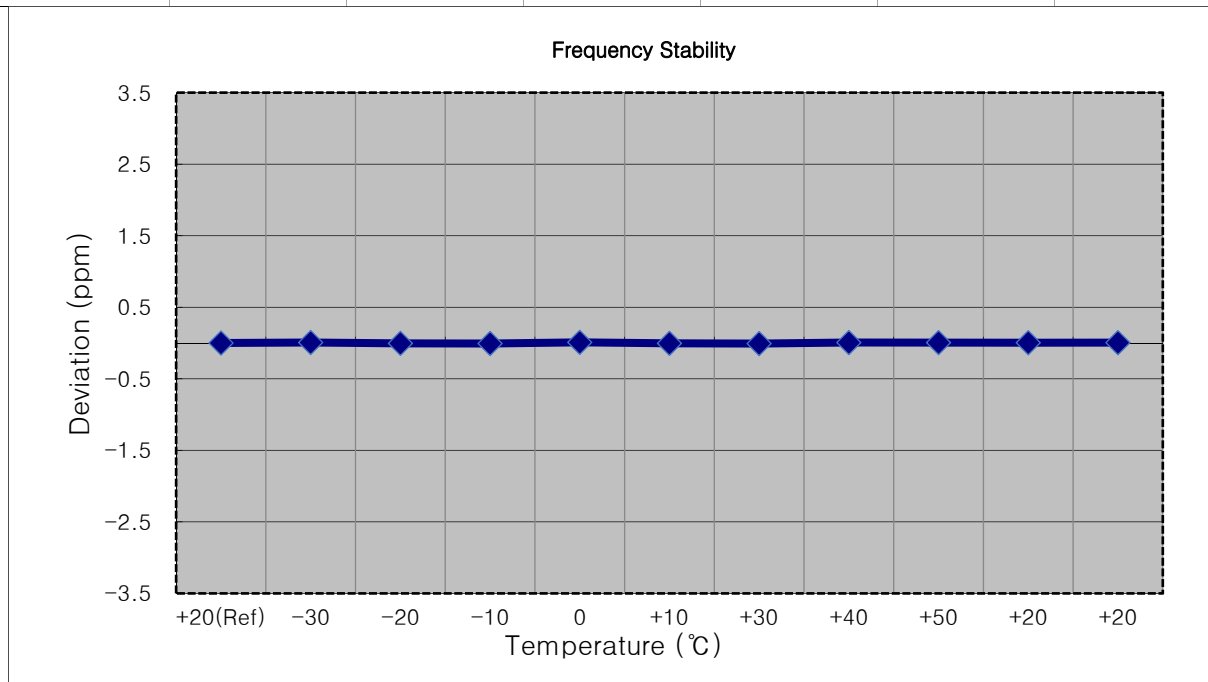



- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1907 500 006	0.0	0.000 000	0.000
100%		-30	1907 500 002	-4.2	0.000 000	-0.002
100%		-20	1907 499 994	-12.4	-0.000 001	-0.007
100%		-10	1907 500 010	3.7	0.000 000	0.002
100%		0	1907 500 001	-5.7	0.000 000	-0.003
100%		+10	1907 499 995	-11.5	-0.000 001	-0.006
100%		+30	1907 500 013	6.3	0.000 000	0.003
100%		+40	1907 500 001	-5.4	0.000 000	-0.003
100%		+50	1907 499 997	-9.3	0.000 000	-0.005
85%		11.475	+20	1907 499 999	-7.5	0.000 000
115%	15.525	+20	1907 499 997	-9.1	0.000 000	-0.005

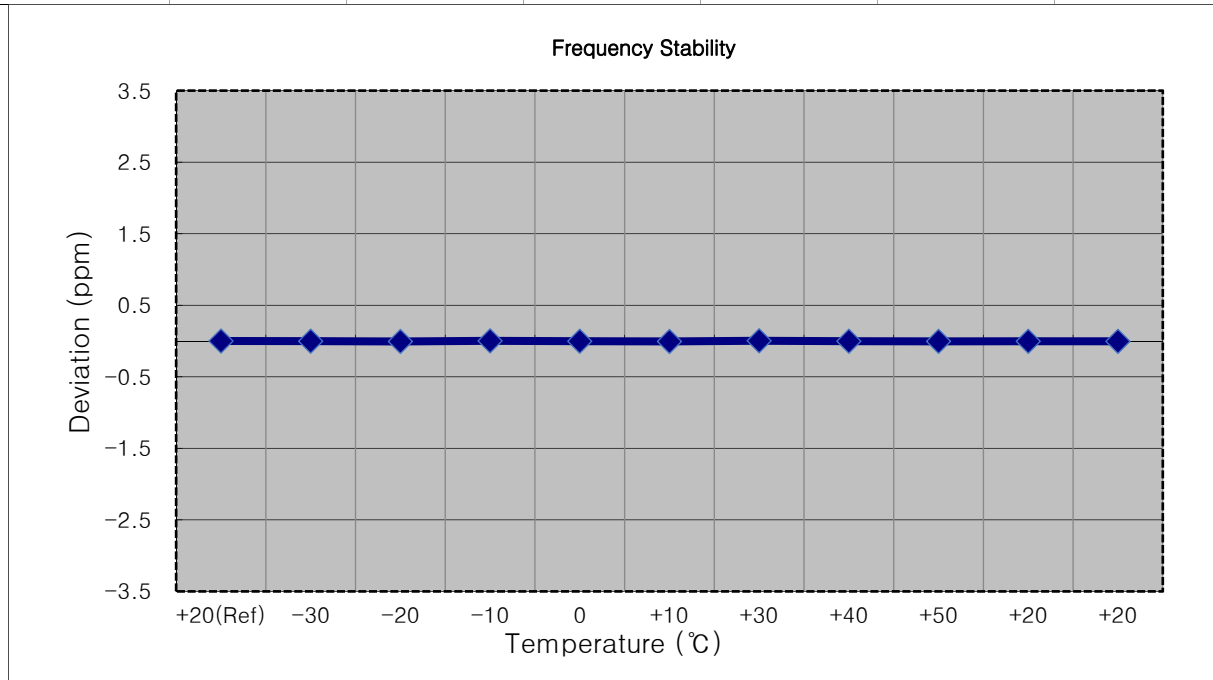




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1905 000 005	0.0	0.000 000	0.000
100%		-30	1905 000 001	-4.5	0.000 000	-0.002
100%		-20	1904 999 993	-12.7	-0.000 001	-0.007
100%		-10	1905 000 003	-1.9	0.000 000	-0.001
100%		0	1904 999 999	-6.2	0.000 000	-0.003
100%		+10	1905 000 014	8.6	0.000 000	0.005
100%		+30	1905 000 012	6.6	0.000 000	0.003
100%		+40	1904 999 999	-6.8	0.000 000	-0.004
100%		+50	1904 999 993	-12.1	-0.000 001	-0.006
85%	11.475	+20	1904 999 997	-8.4	0.000 000	-0.004
115%	15.525	+20	1904 999 997	-7.9	0.000 000	-0.004

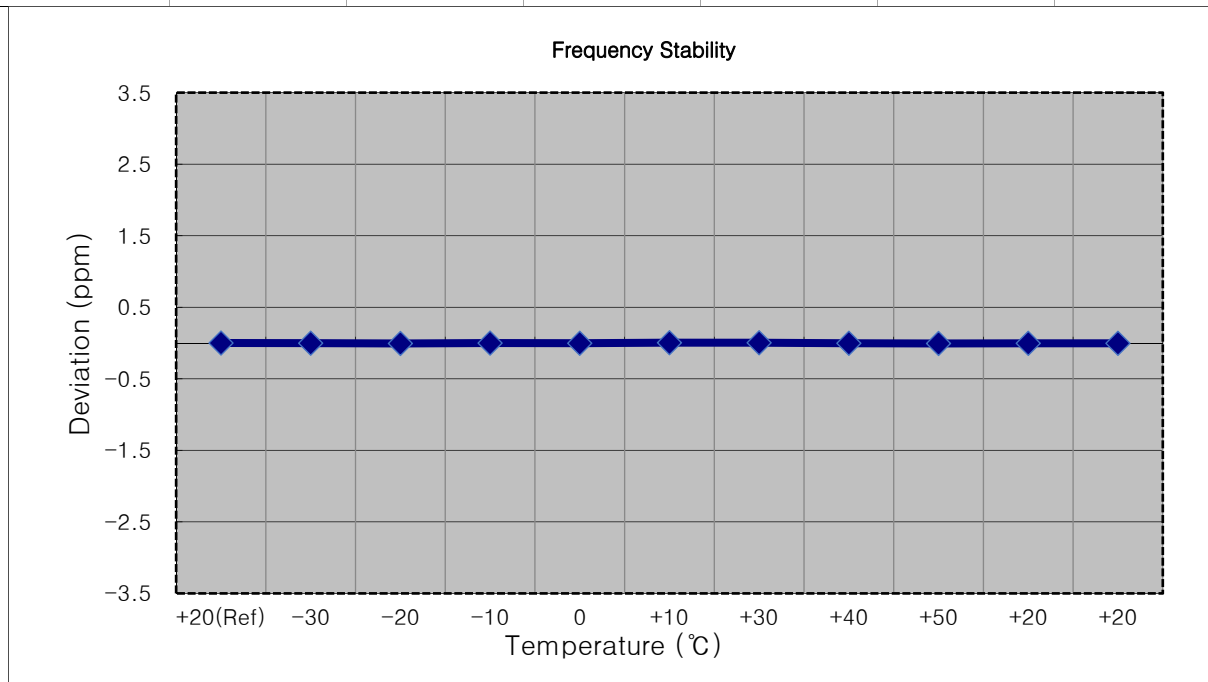

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1902 499 994	0.0	0.000 000	0.000
100%		-30	1902 500 000	5.9	0.000 000	0.003
100%		-20	1902 499 987	-6.9	0.000 000	-0.004
100%		-10	1902 499 981	-12.9	-0.000 001	-0.007
100%		0	1902 499 998	3.9	0.000 000	0.002
100%		+10	1902 499 986	-8.8	0.000 000	-0.005
100%		+30	1902 500 007	12.2	0.000 001	0.006
100%		+40	1902 500 004	9.2	0.000 000	0.005
100%		+50	1902 499 988	-5.9	0.000 000	-0.003
85%		11.475	+20	1902 499 990	-4.5	0.000 000
115%	15.525	+20	1902 499 988	-6.8	0.000 000	-0.004

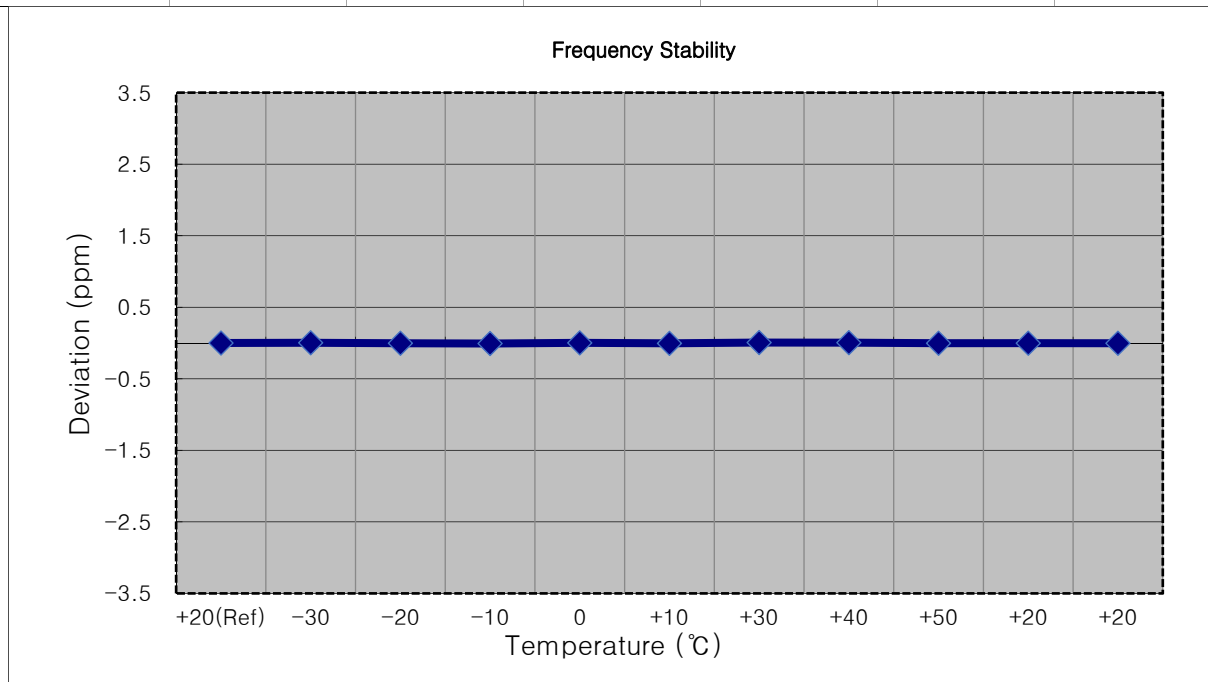



- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	13.500	+20(Ref)	1899 999 988	0.0	0.000 000	0.000
100%		-30	1899 999 977	-10.5	-0.000 001	-0.006
100%		-20	1899 999 981	-7.4	0.000 000	-0.004
100%		-10	1899 999 982	-6.2	0.000 000	-0.003
100%		0	1899 999 991	3.5	0.000 000	0.002
100%		+10	1899 999 996	8.2	0.000 000	0.004
100%		+30	1899 999 978	-10.3	-0.000 001	-0.005
100%		+40	1899 999 982	-5.5	0.000 000	-0.003
100%		+50	1899 999 993	4.7	0.000 000	0.002
85%		11.475	+20	1899 999 992	3.9	0.000 000
115%	15.525	+20	1899 999 984	-4.4	0.000 000	-0.002

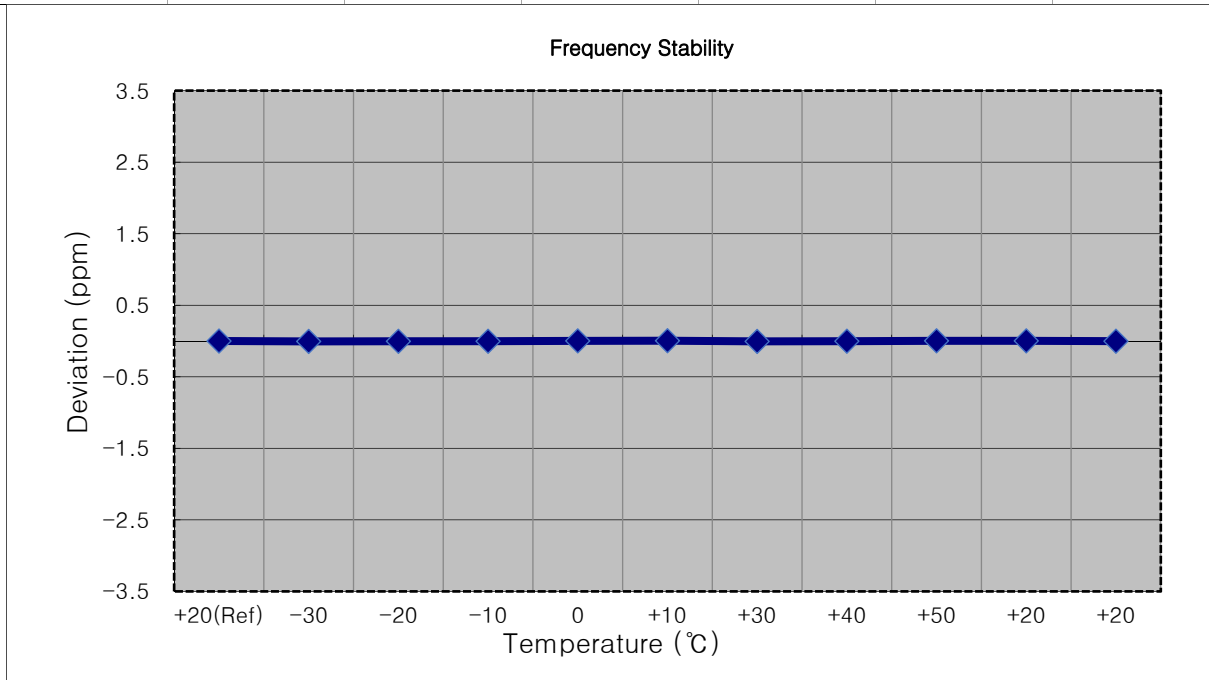




9. TEST PLOTS




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

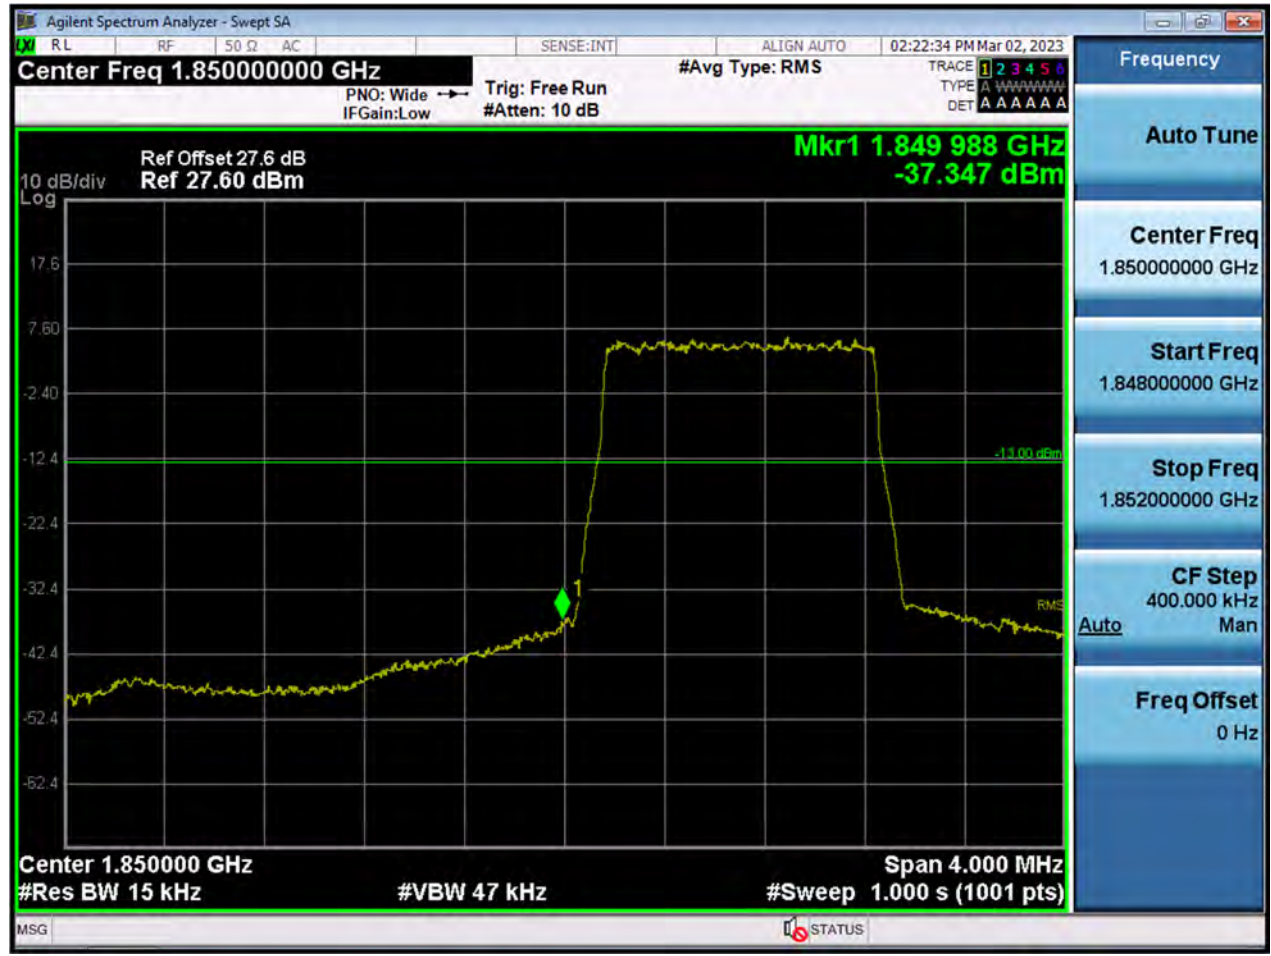




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

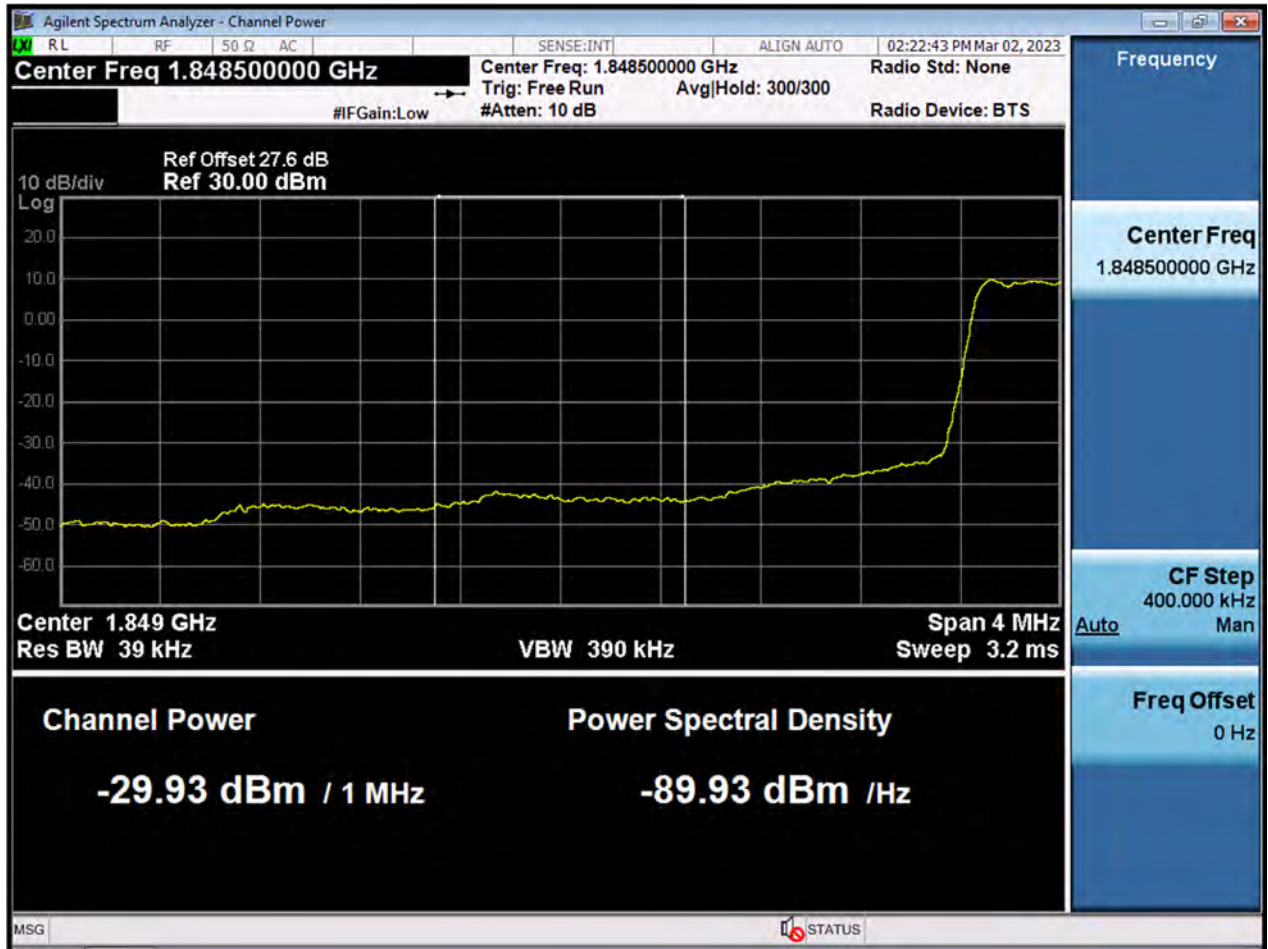




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(1)

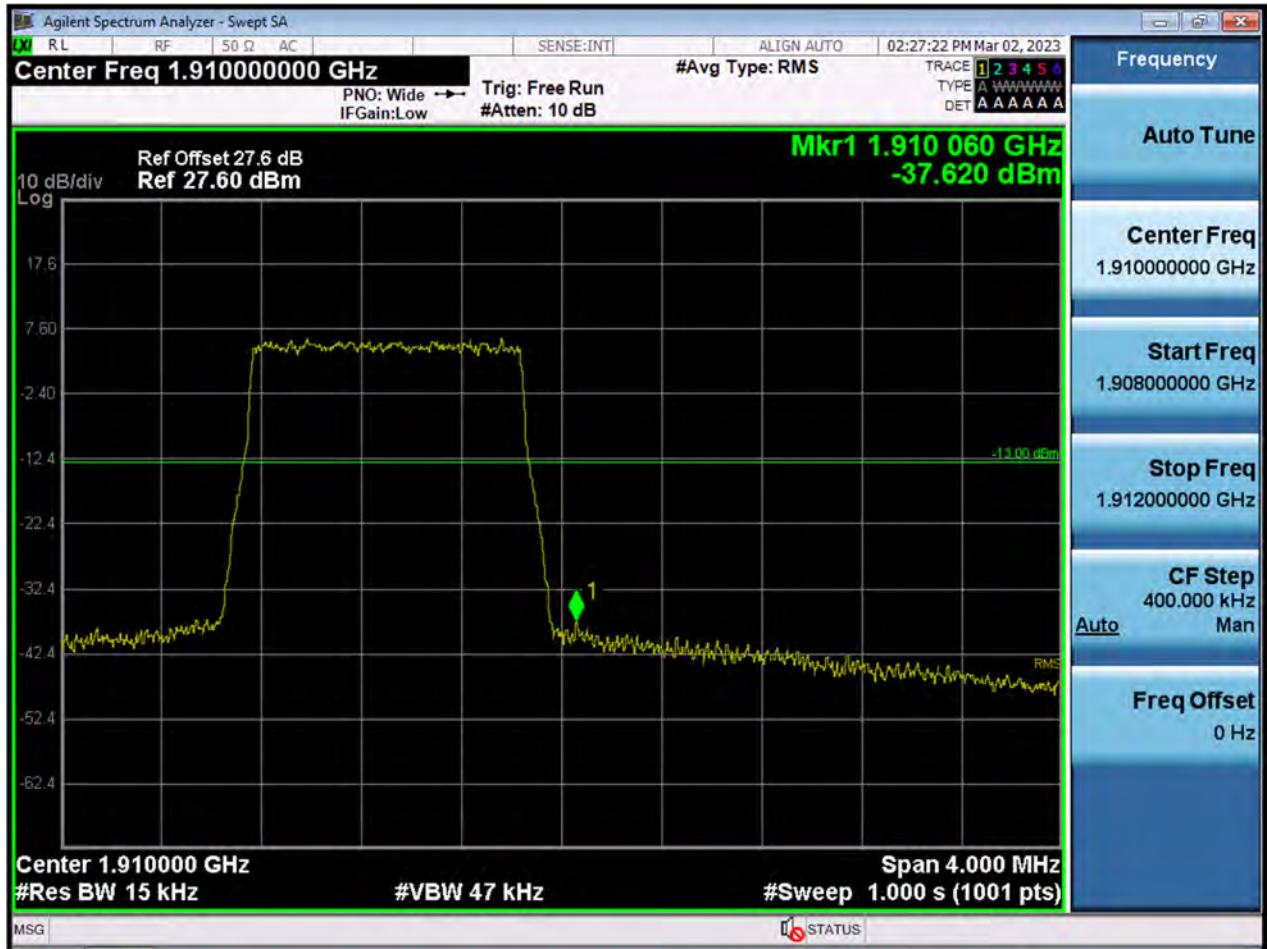




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2)

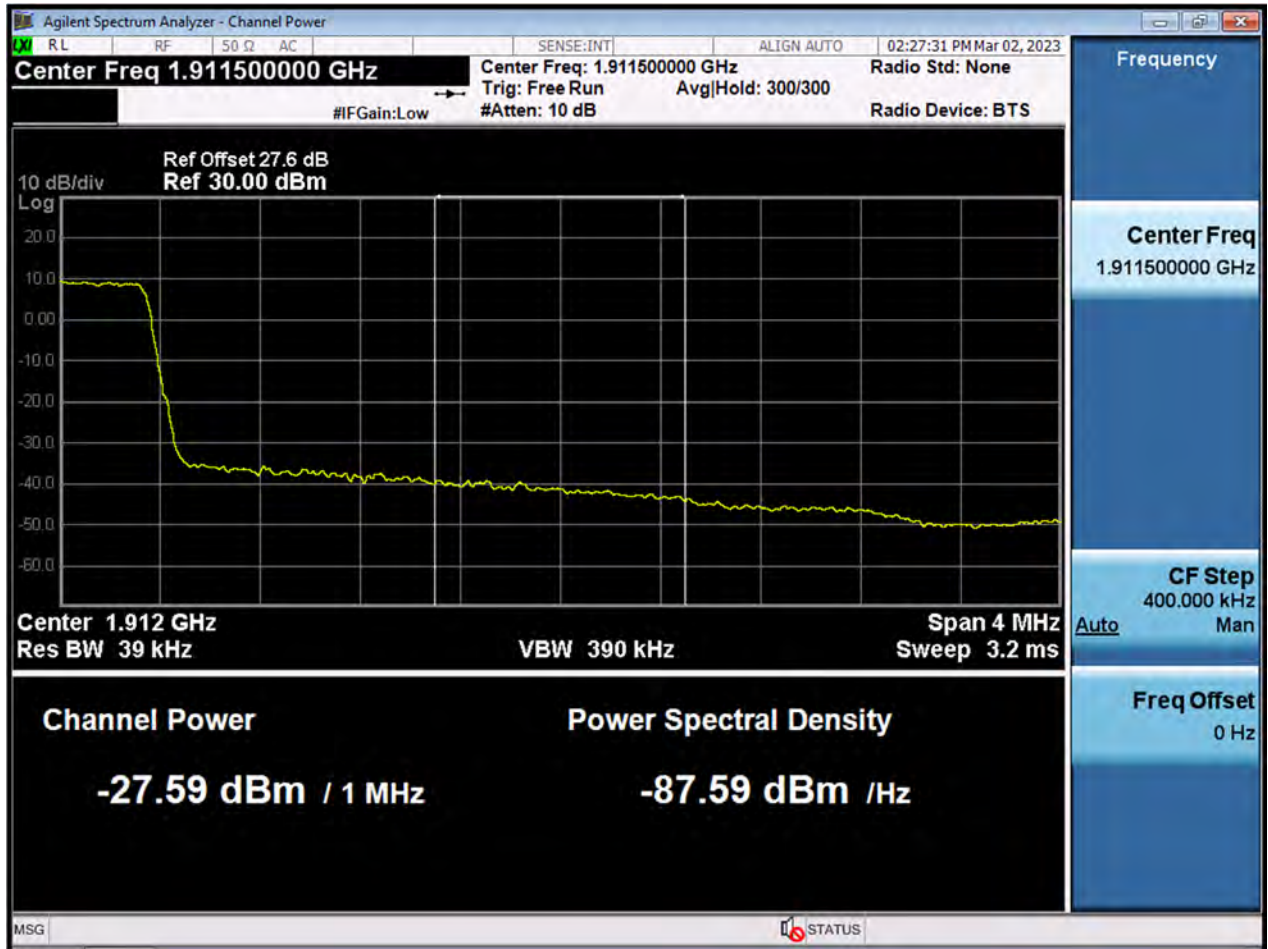




BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

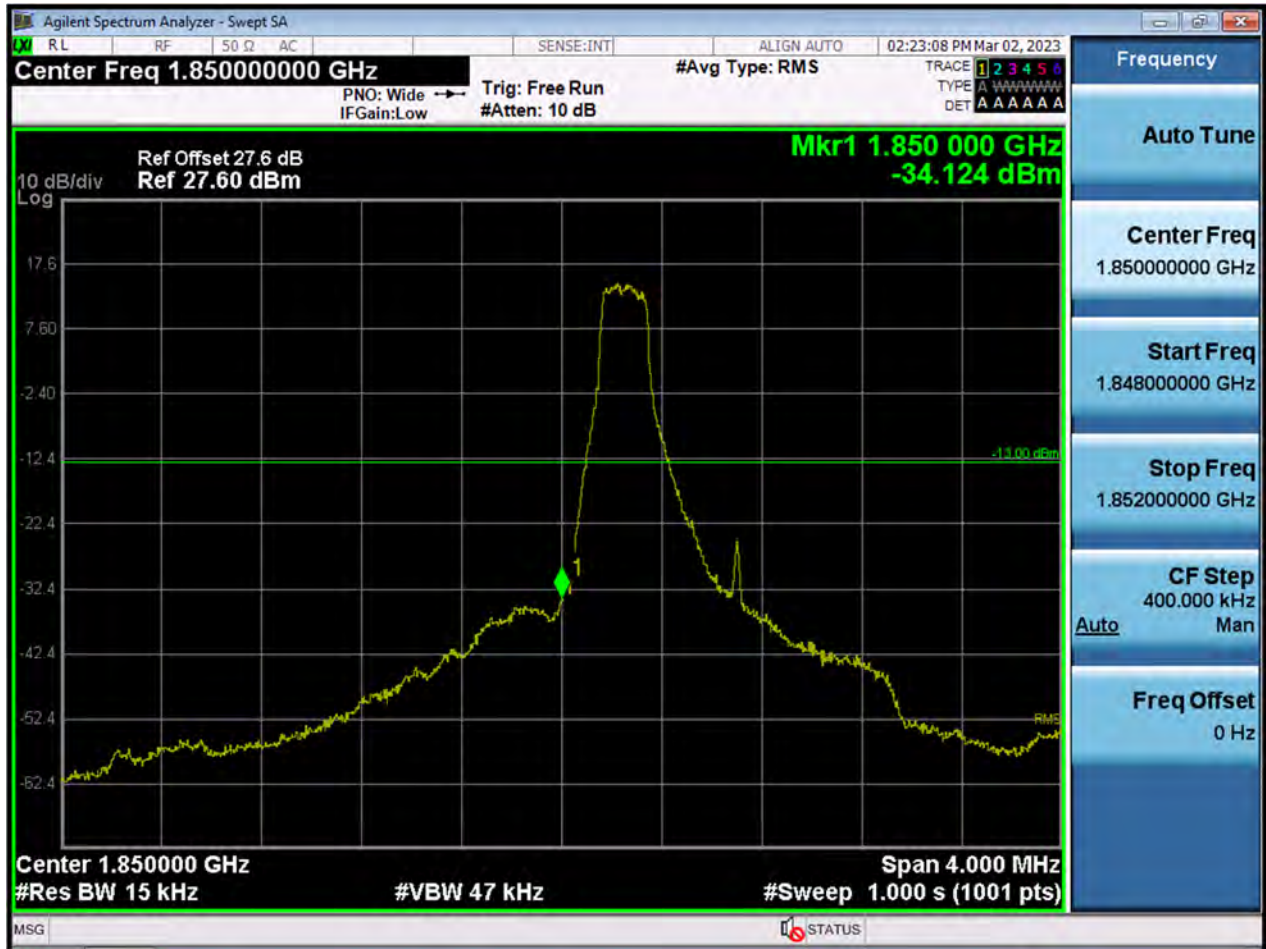




BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

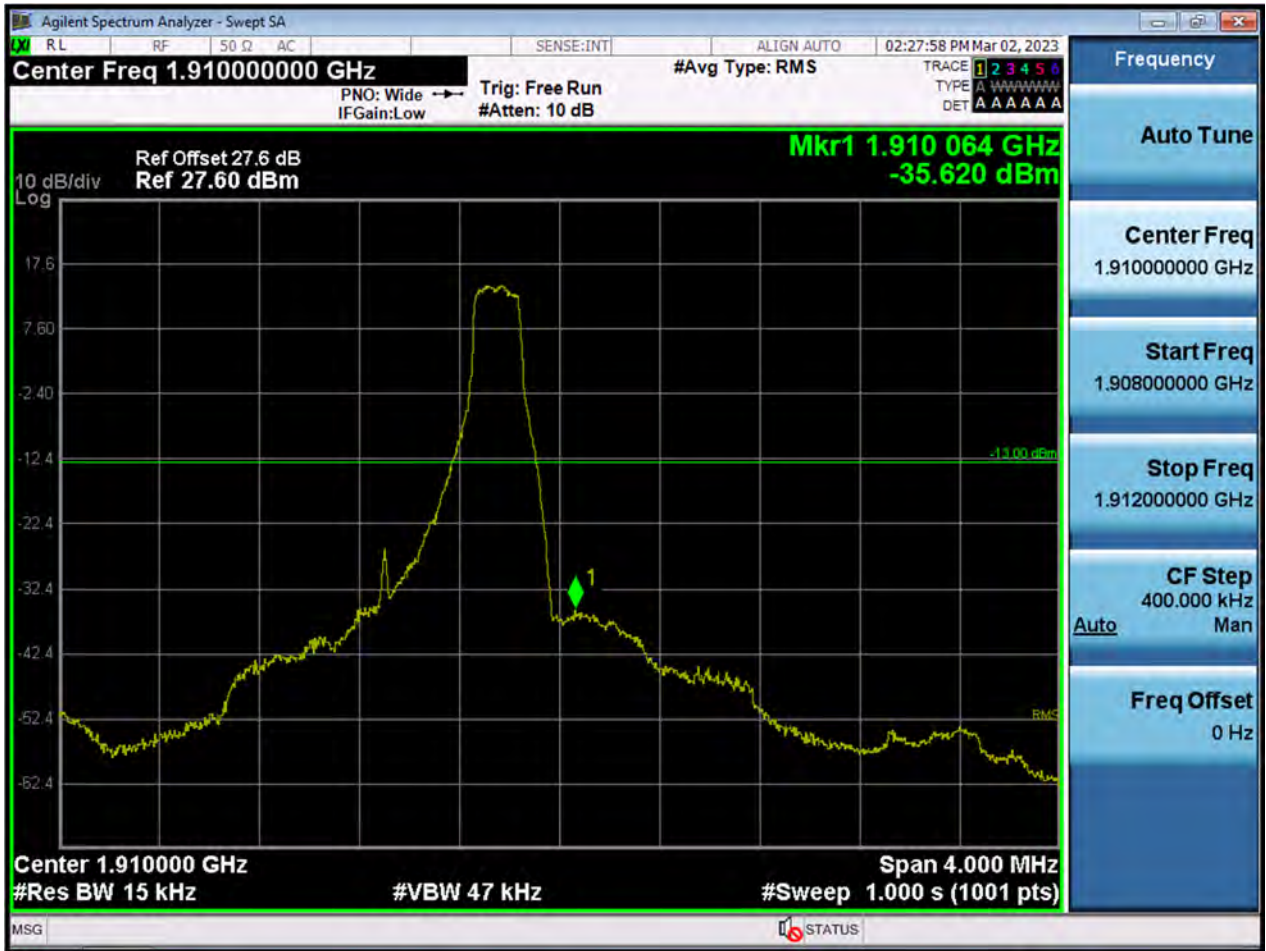




BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

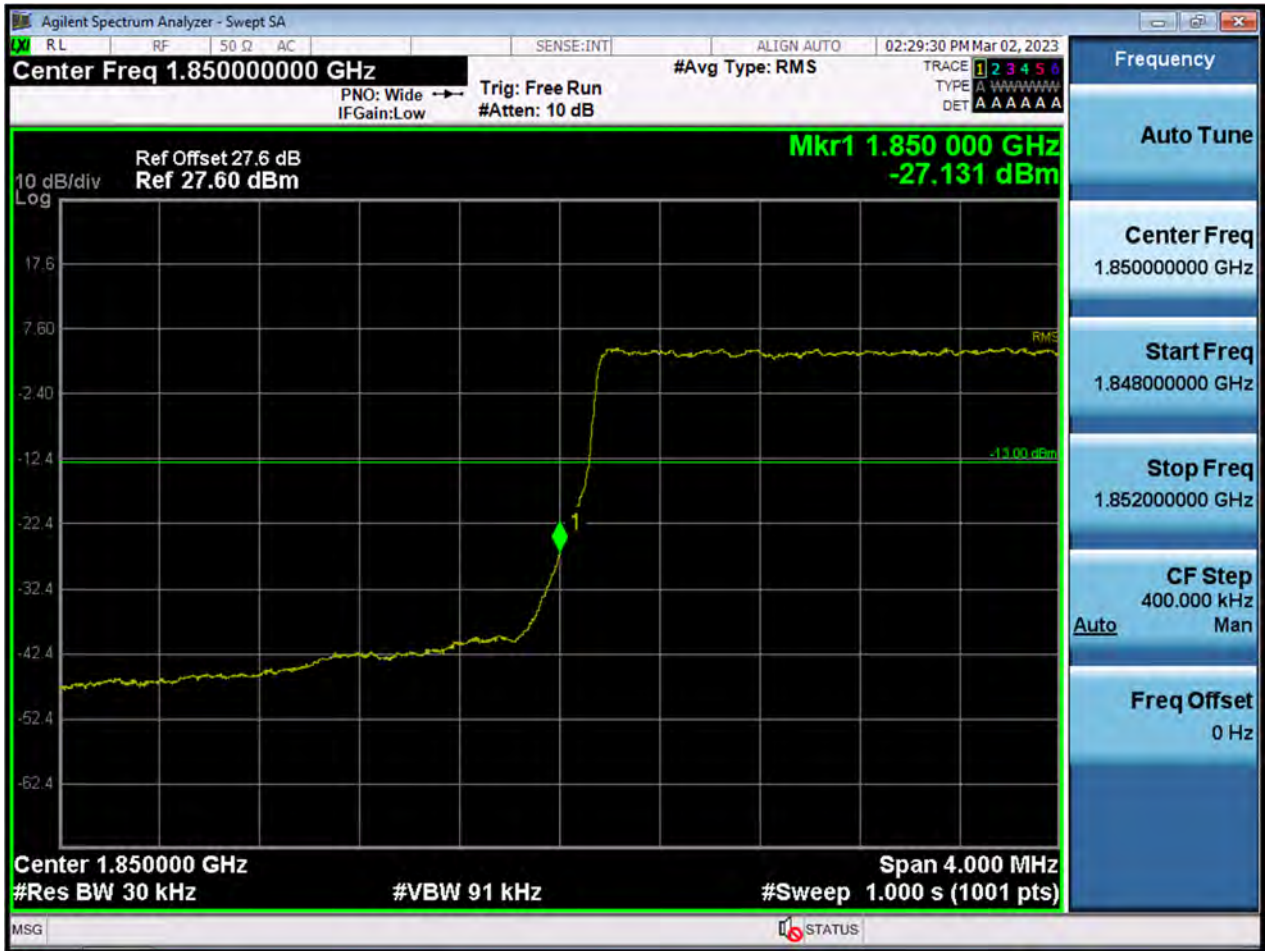



BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

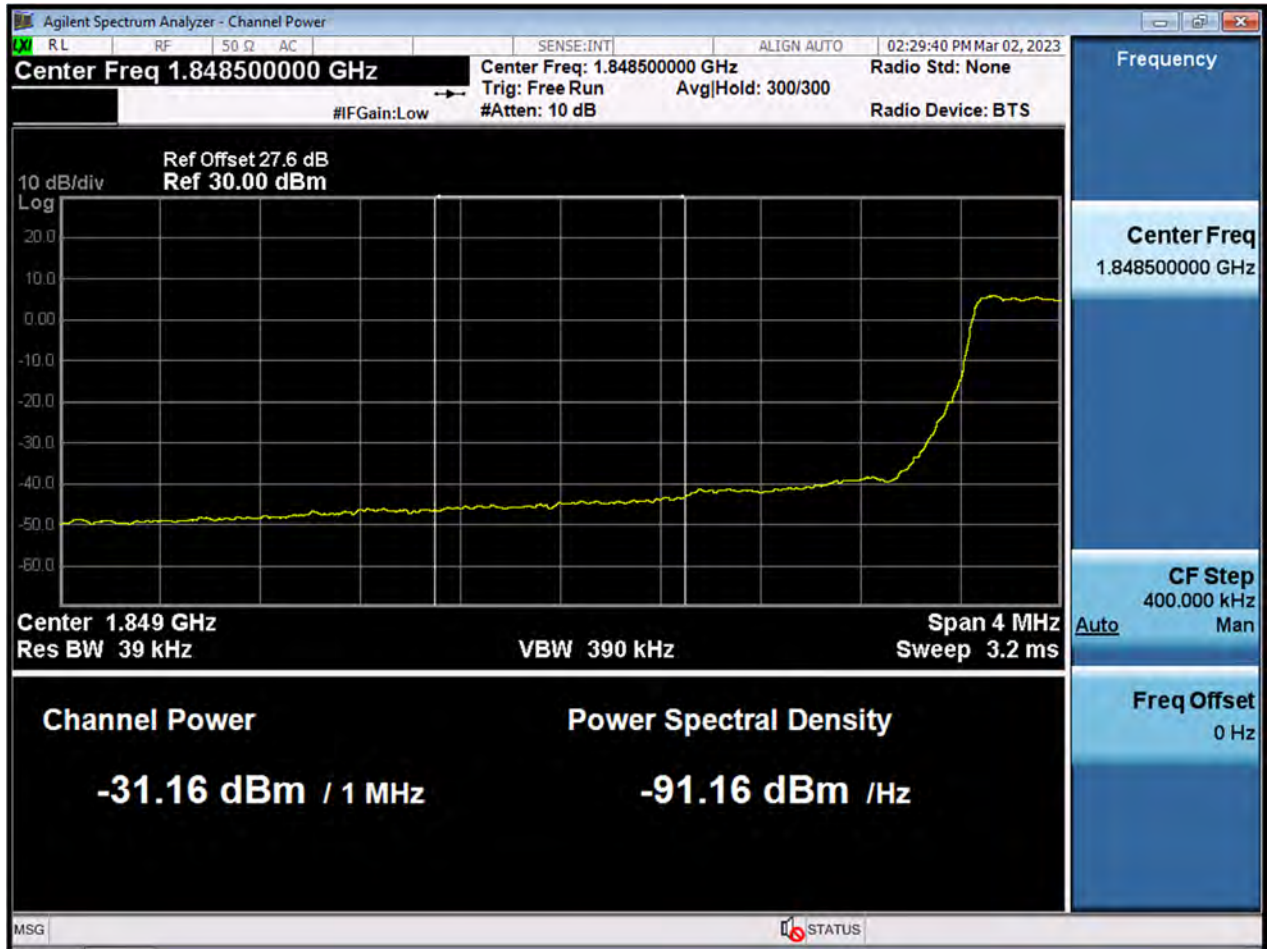




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)






BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

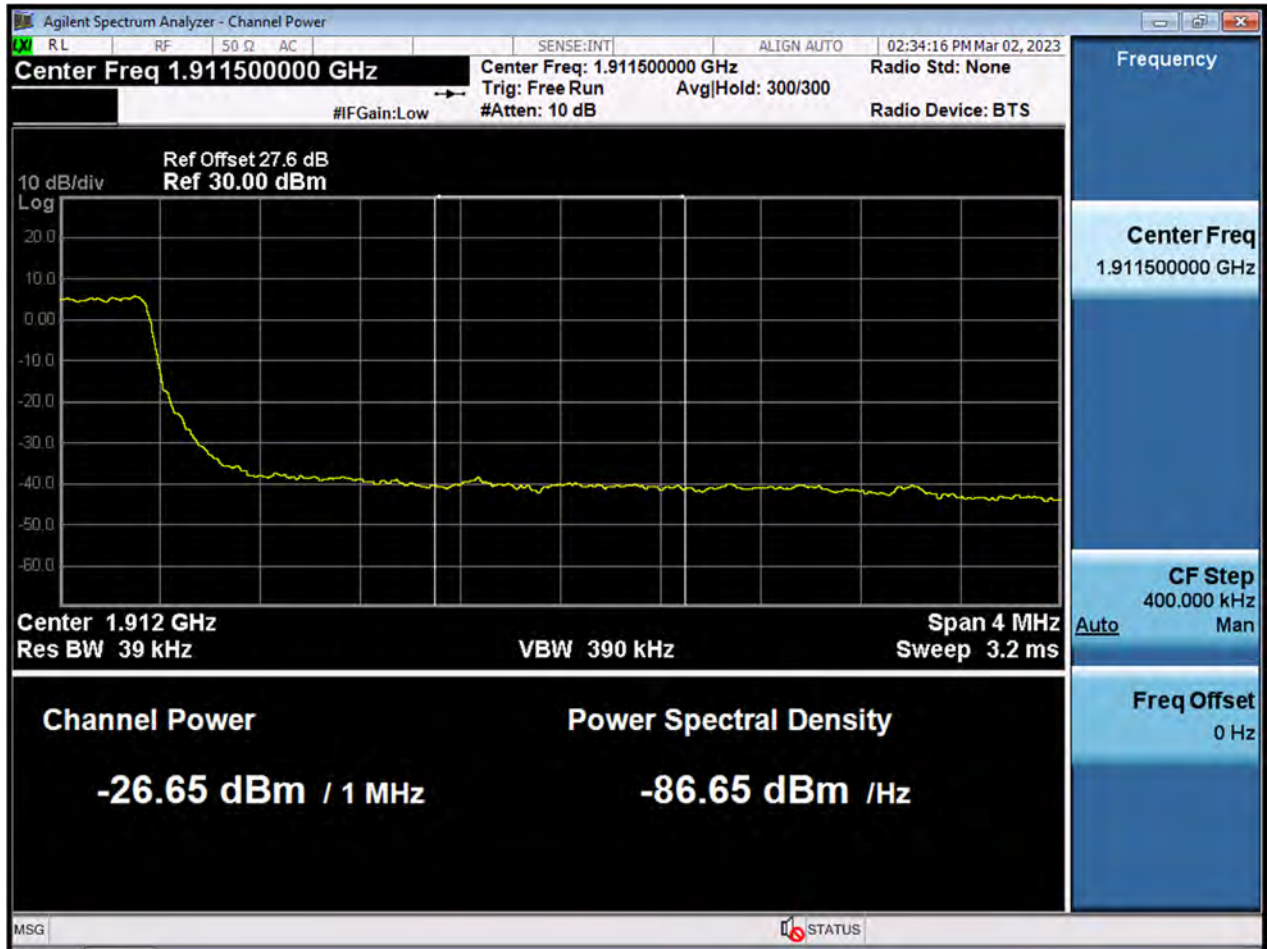




BW3 M_BandEdge_Lowest Channel_QPSK_1RB

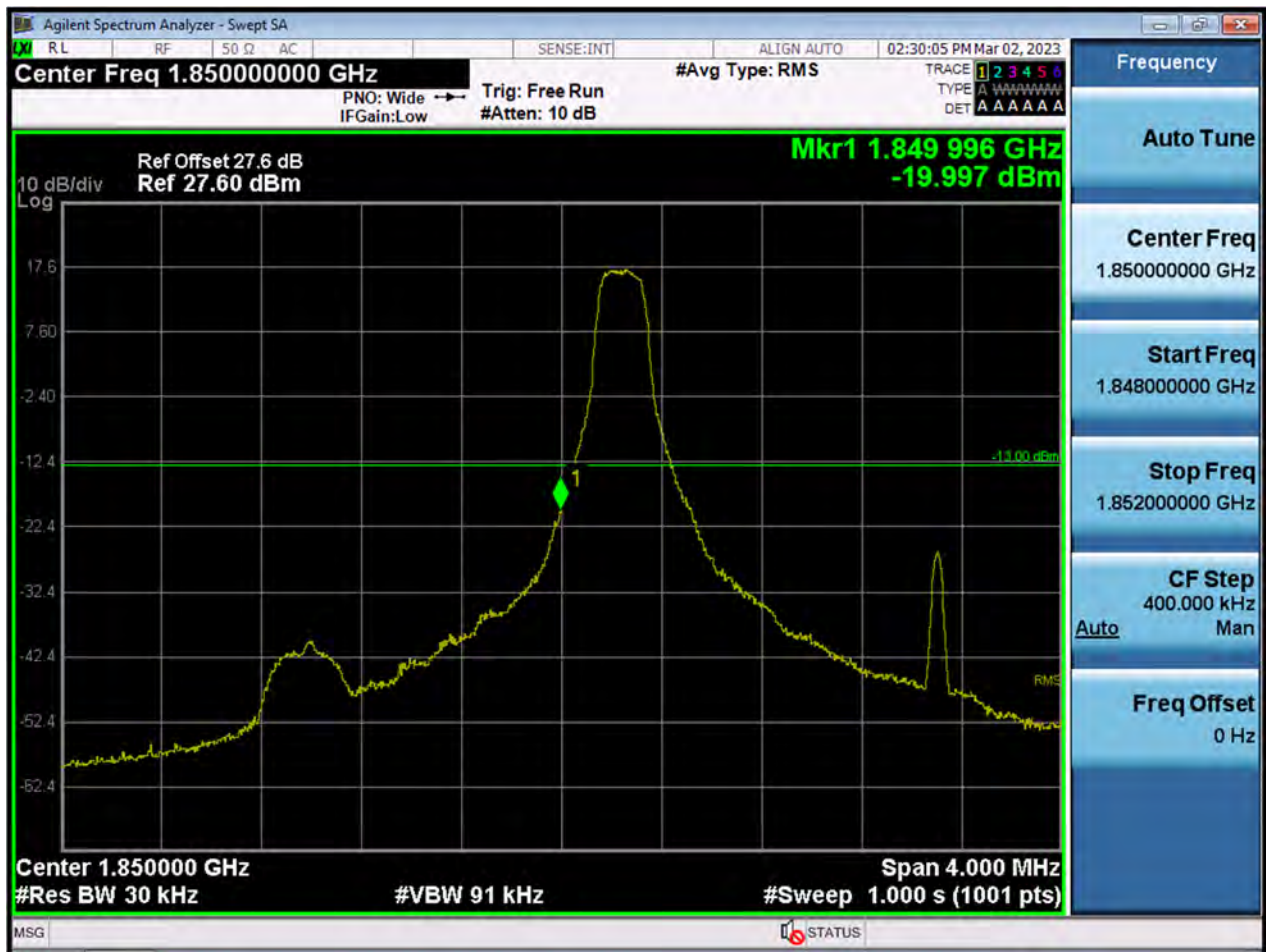


BW3 M_BandEdge_Highest Channel_QPSK_1RB

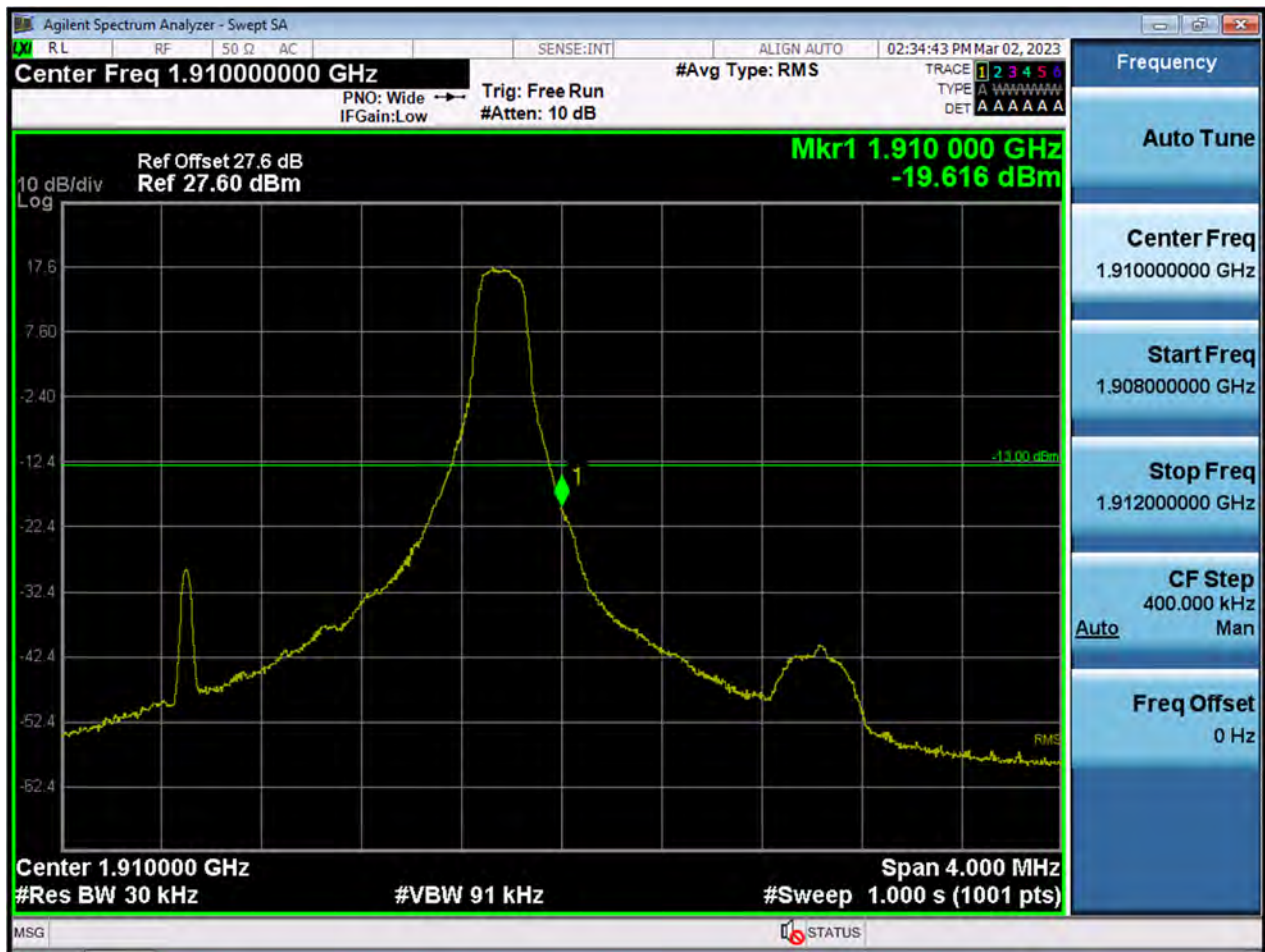




BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

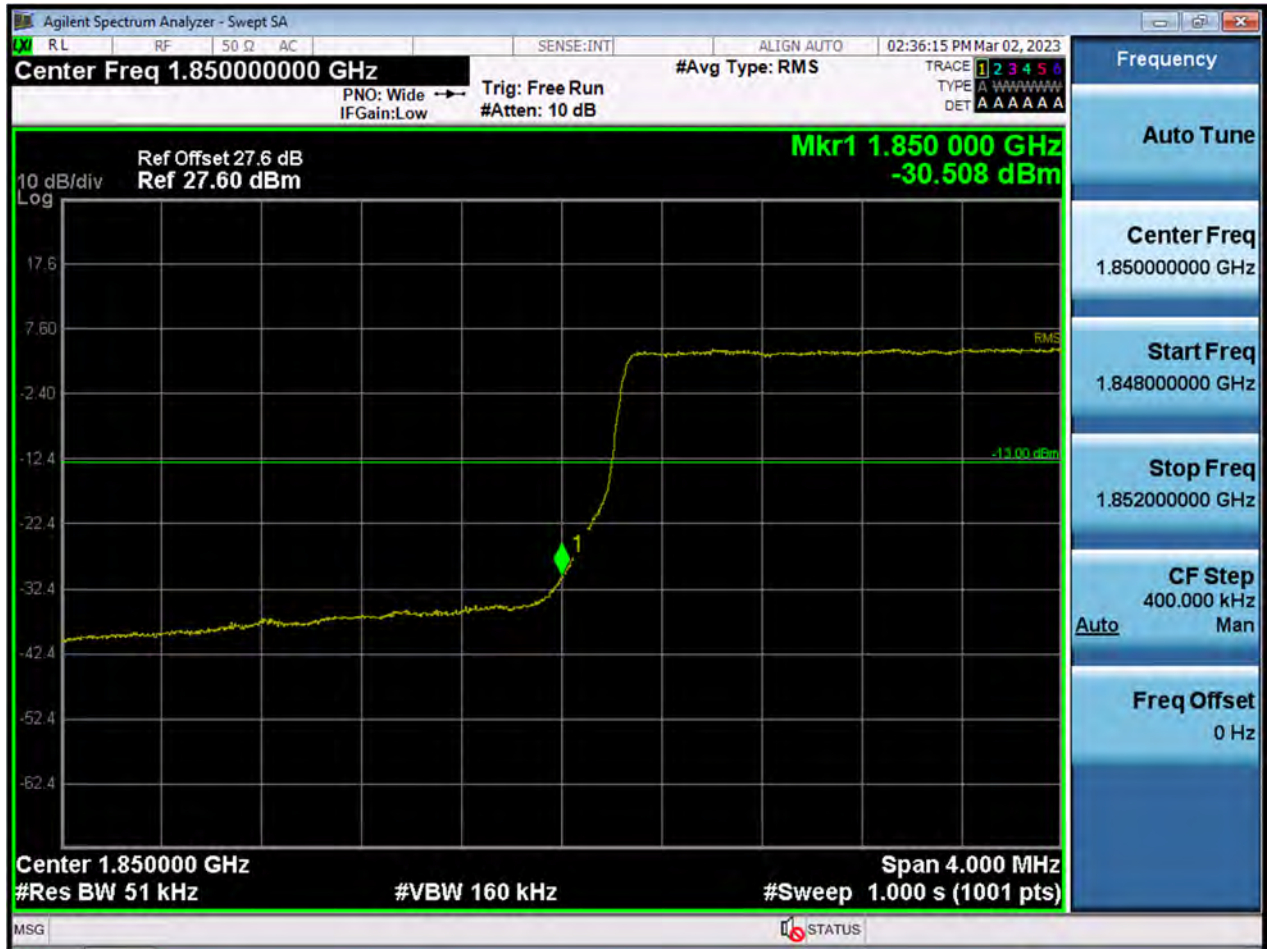



BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

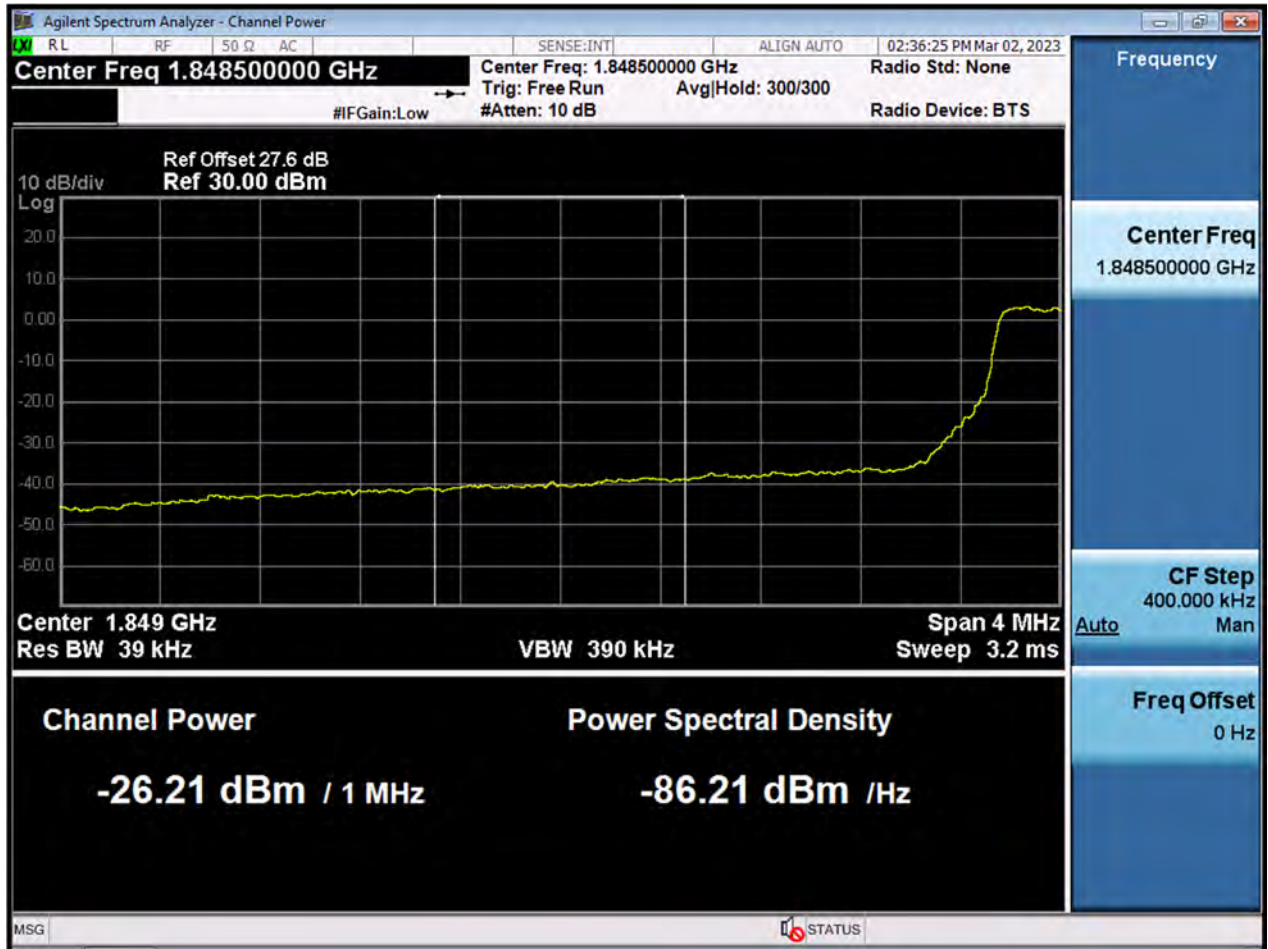




BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)






BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

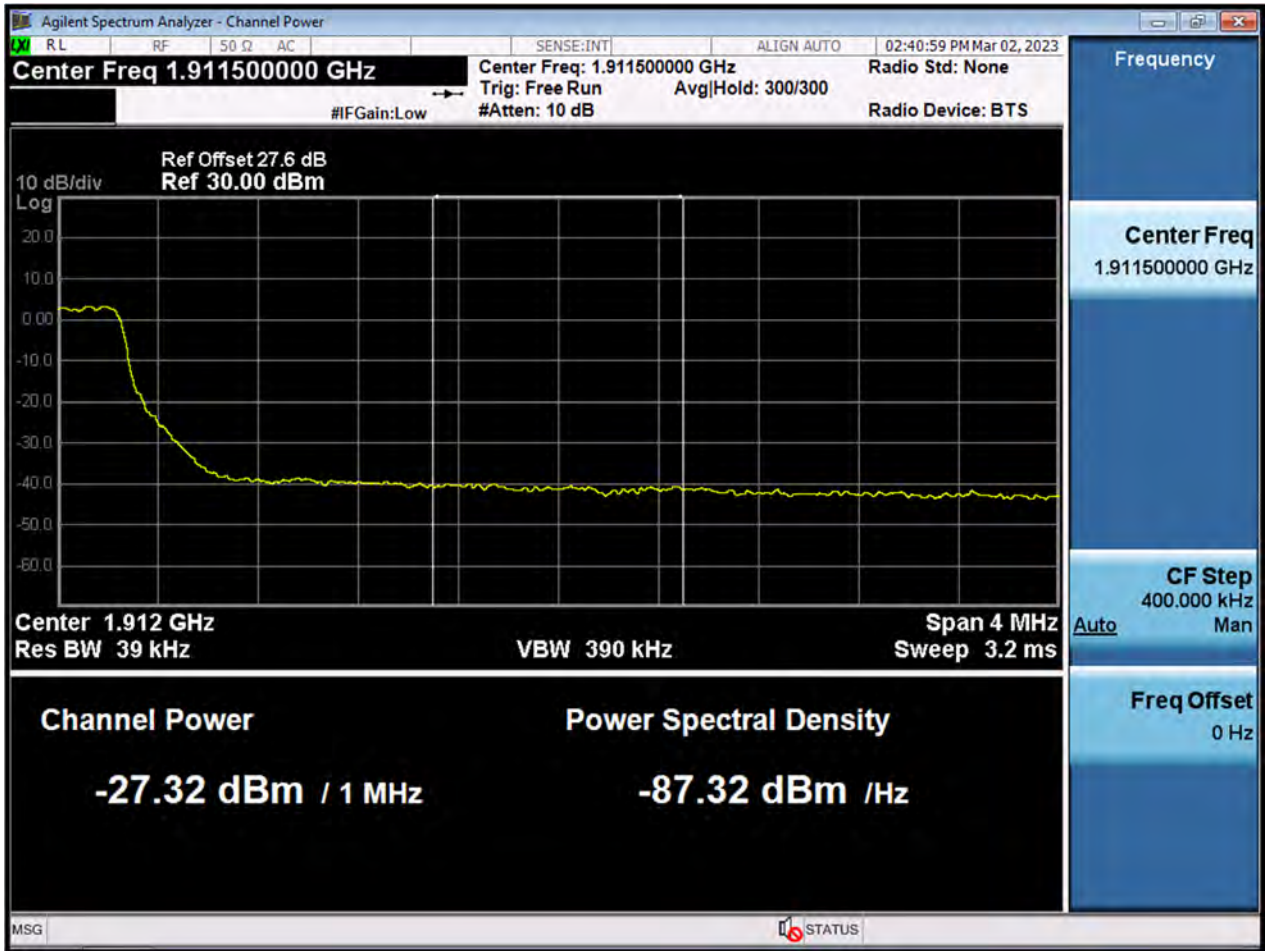




BW5 M_BandEdge_Lowest Channel_QPSK_1RB

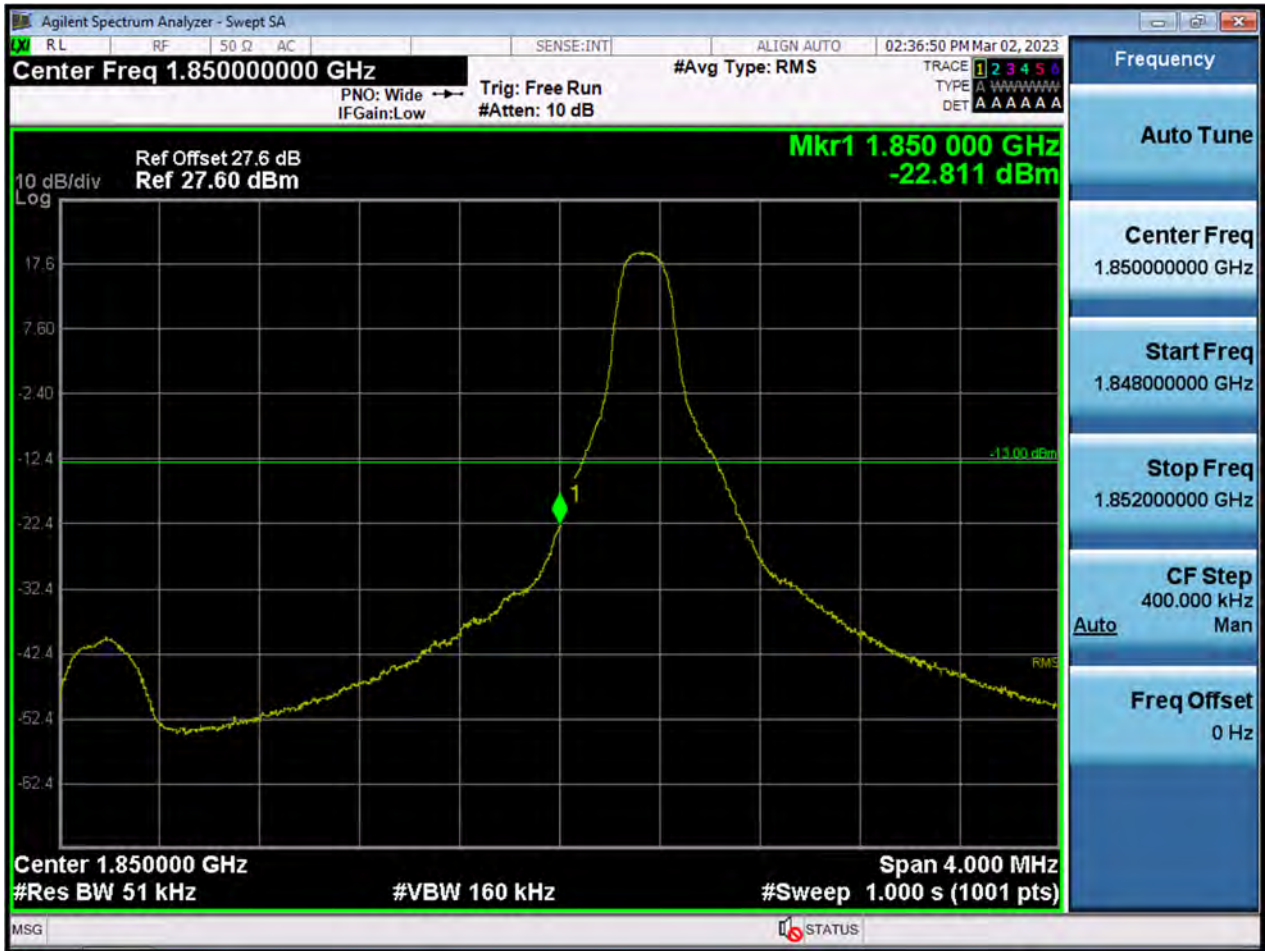



BW5 M_BandEdge_Highest Channel_QPSK_1RB

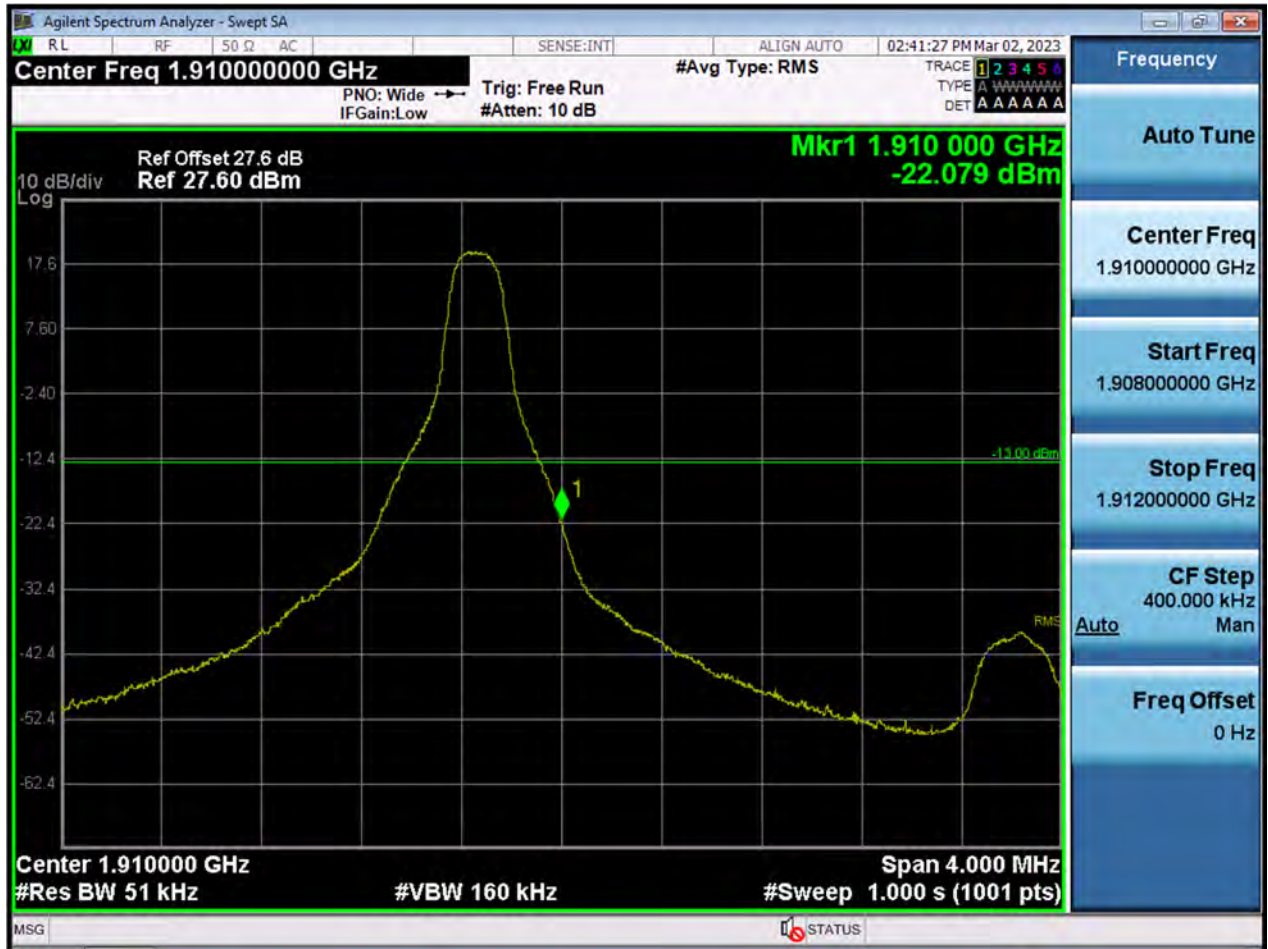




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)





BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

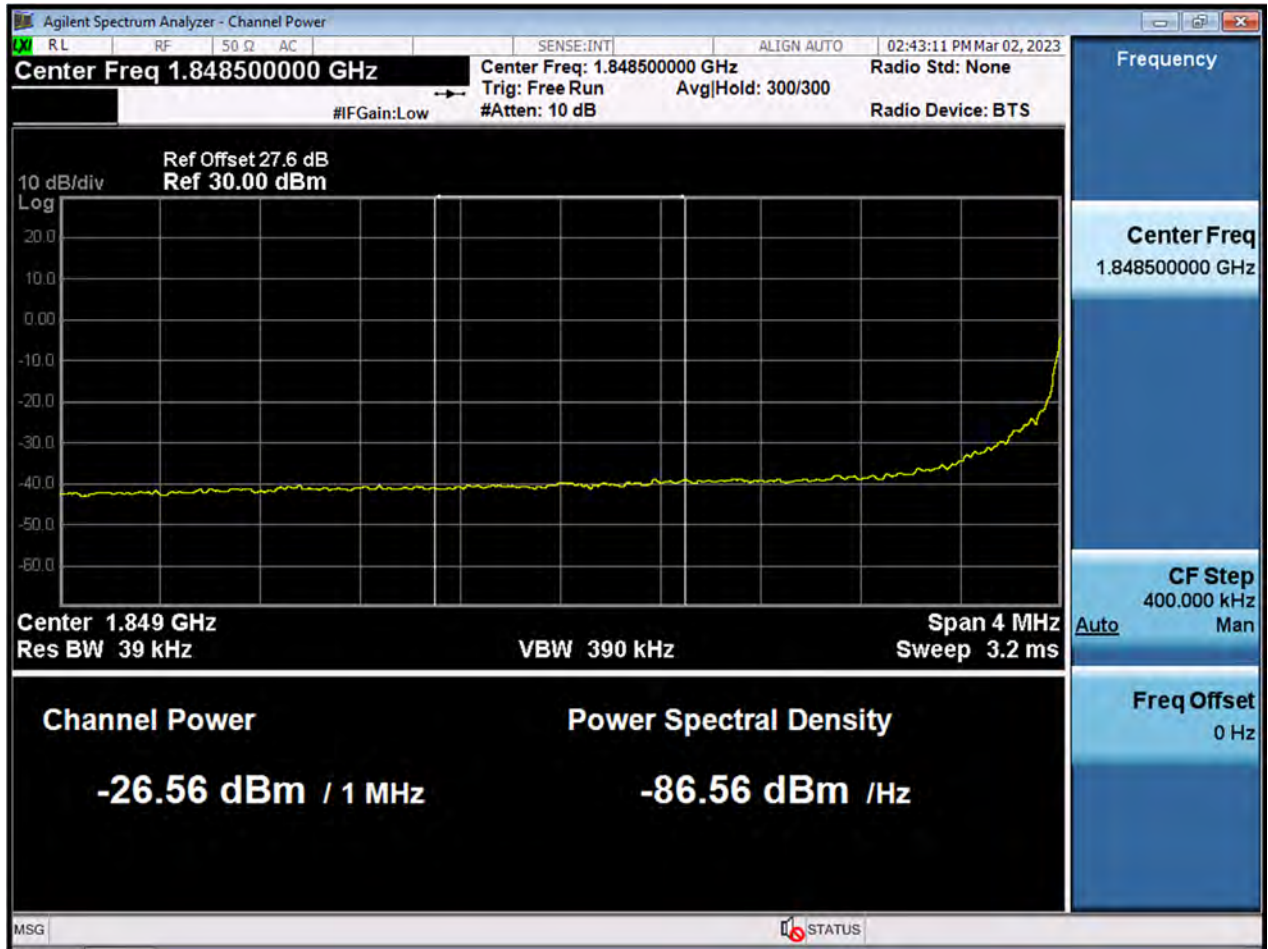




BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)





BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

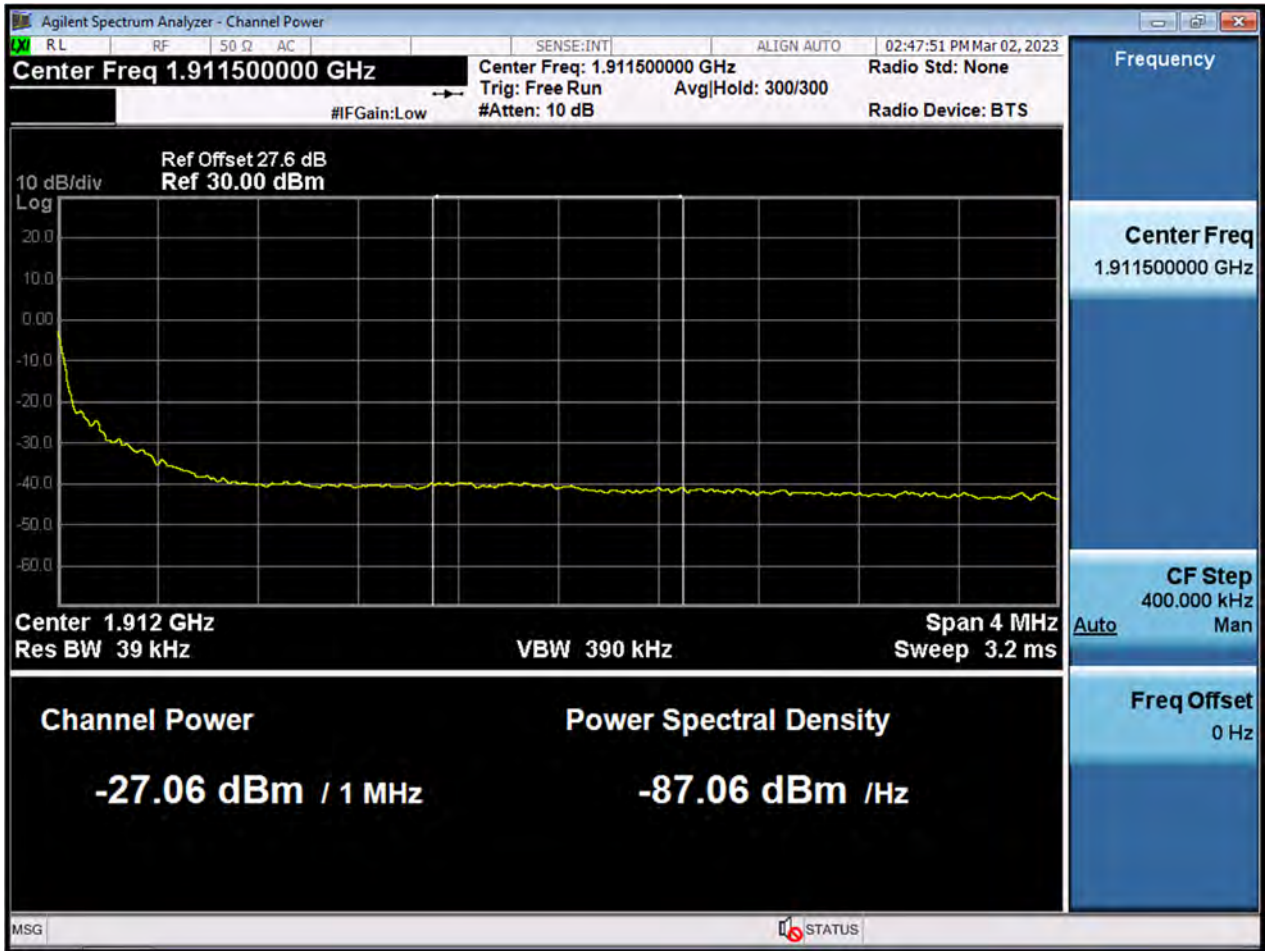



BW10 M_BandEdge_Lowest Channel_QPSK_1RB





BW10 M_BandEdge_Highest Channel_QPSK_1RB






BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1)





BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

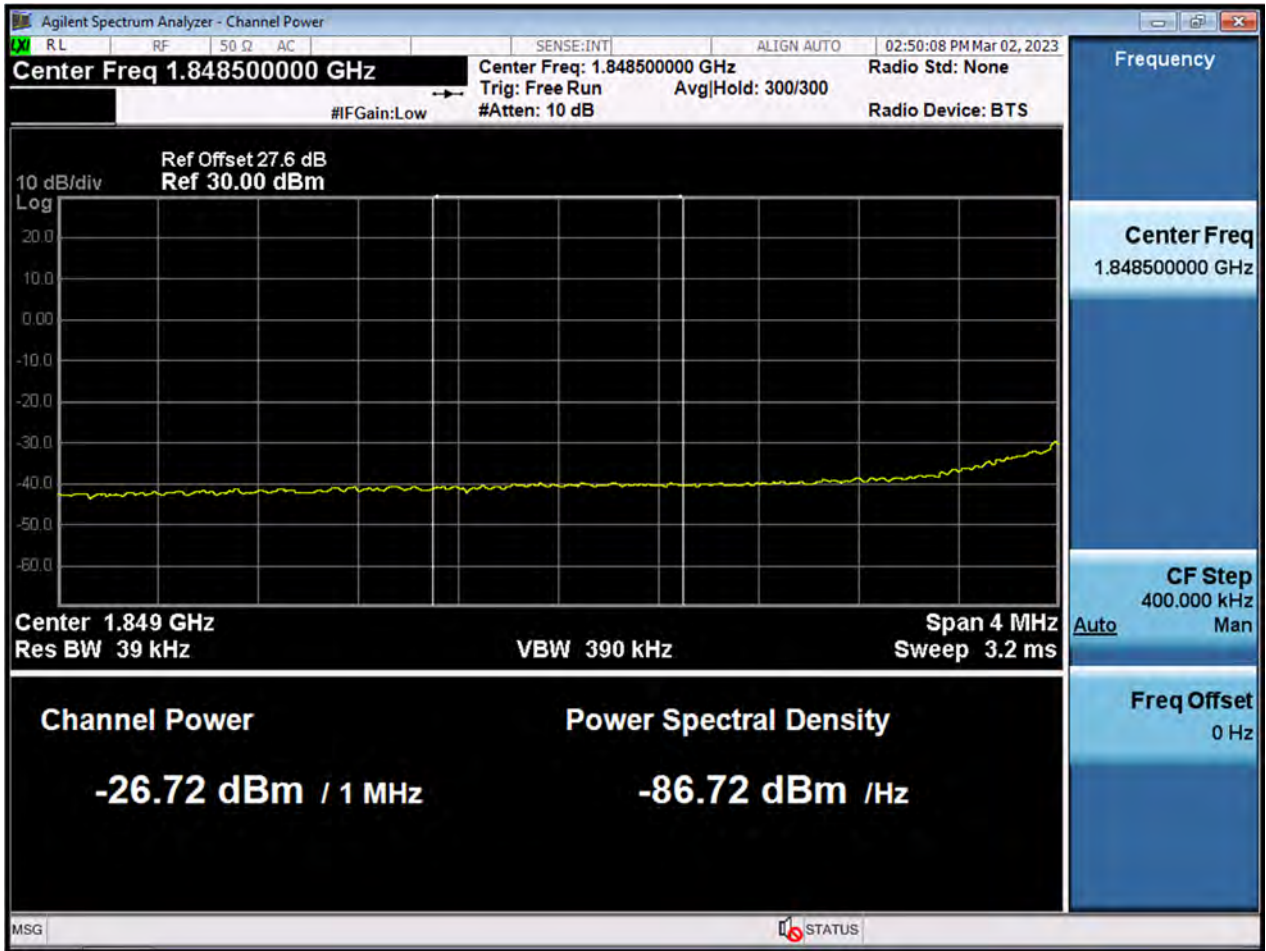




BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)






BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

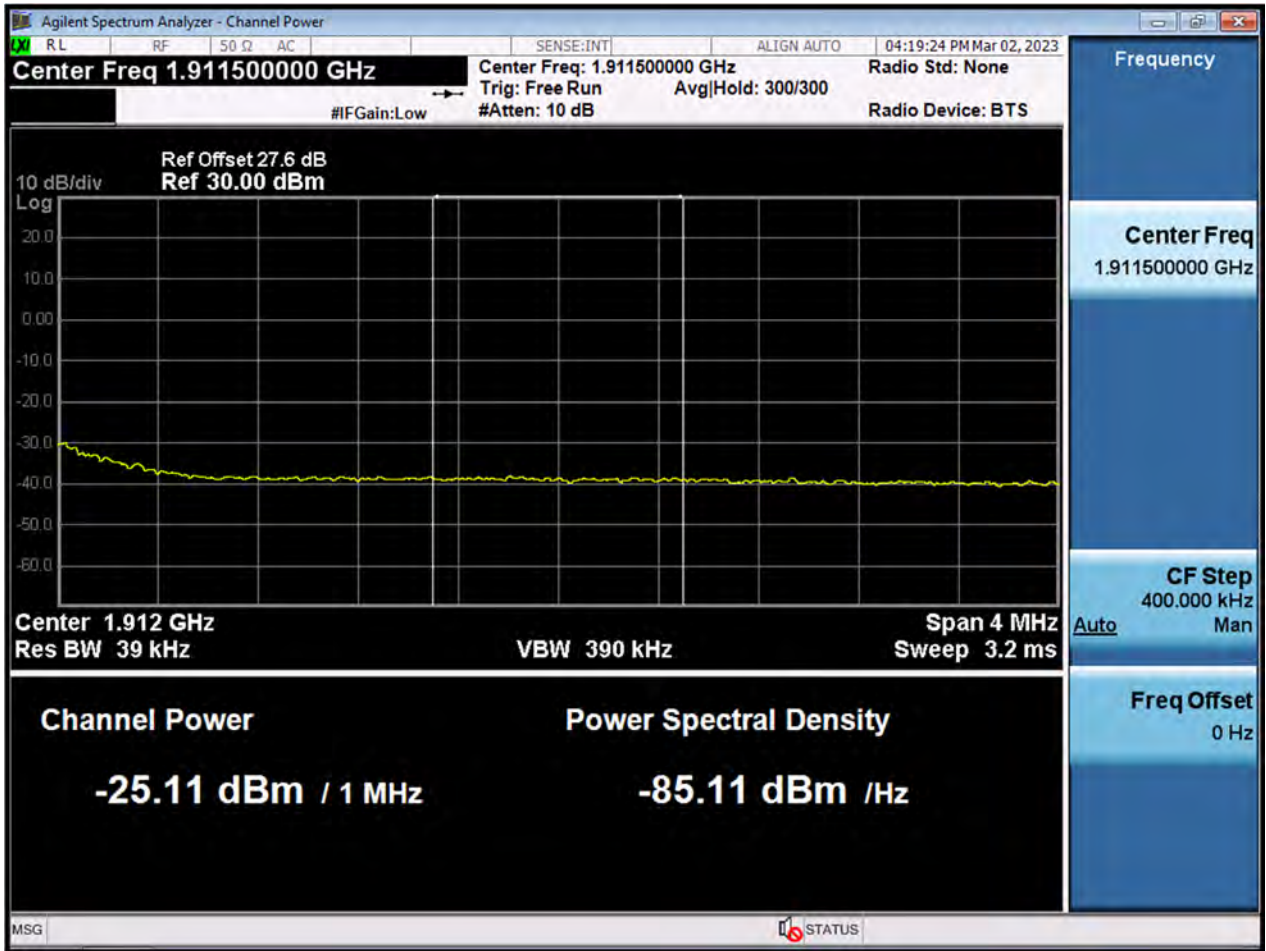



BW15 M_BandEdge_Lowest Channel_QPSK_1RB

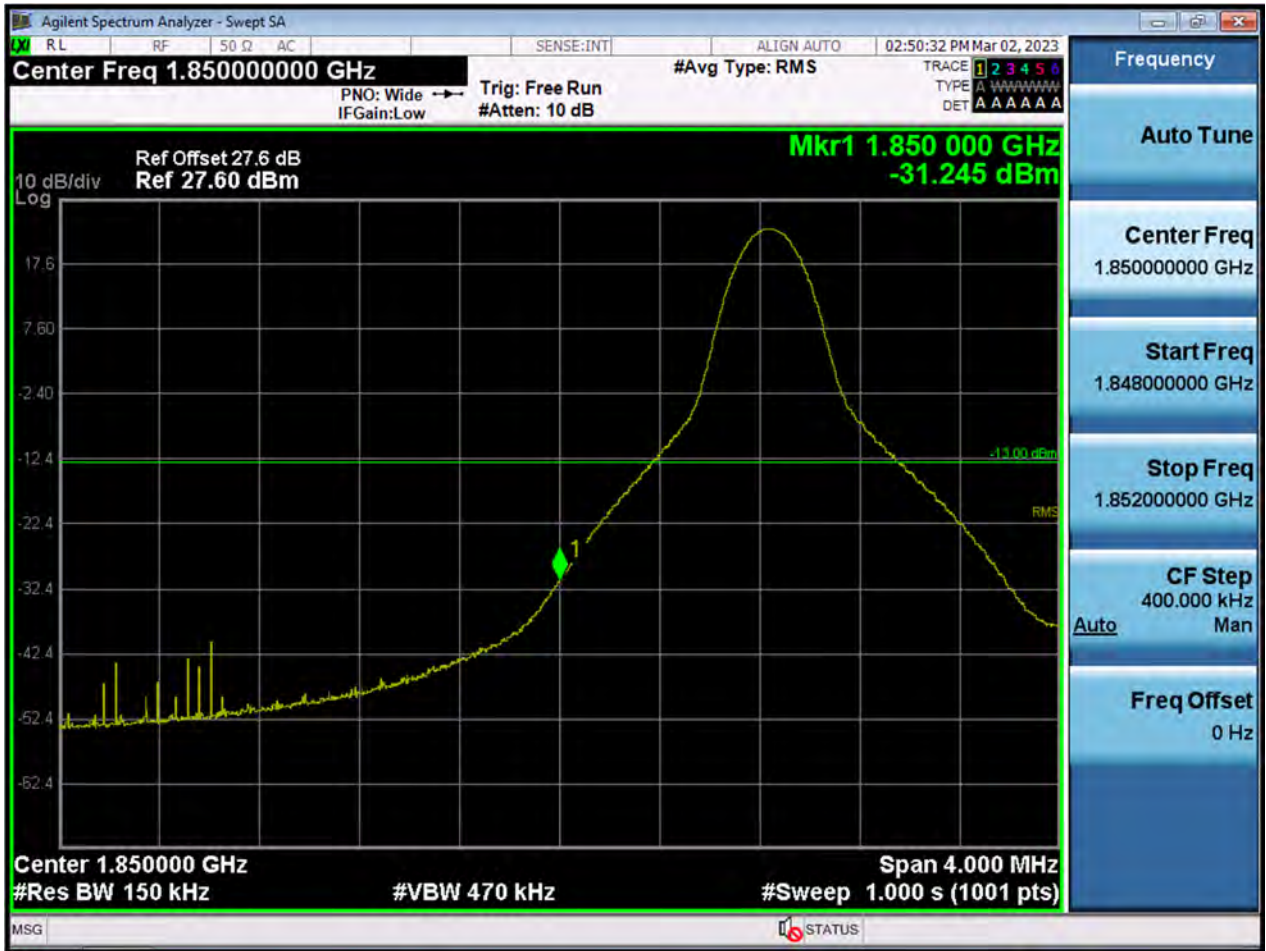



BW15 M_BandEdge_Highest Channel_QPSK_1RB






BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)





BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

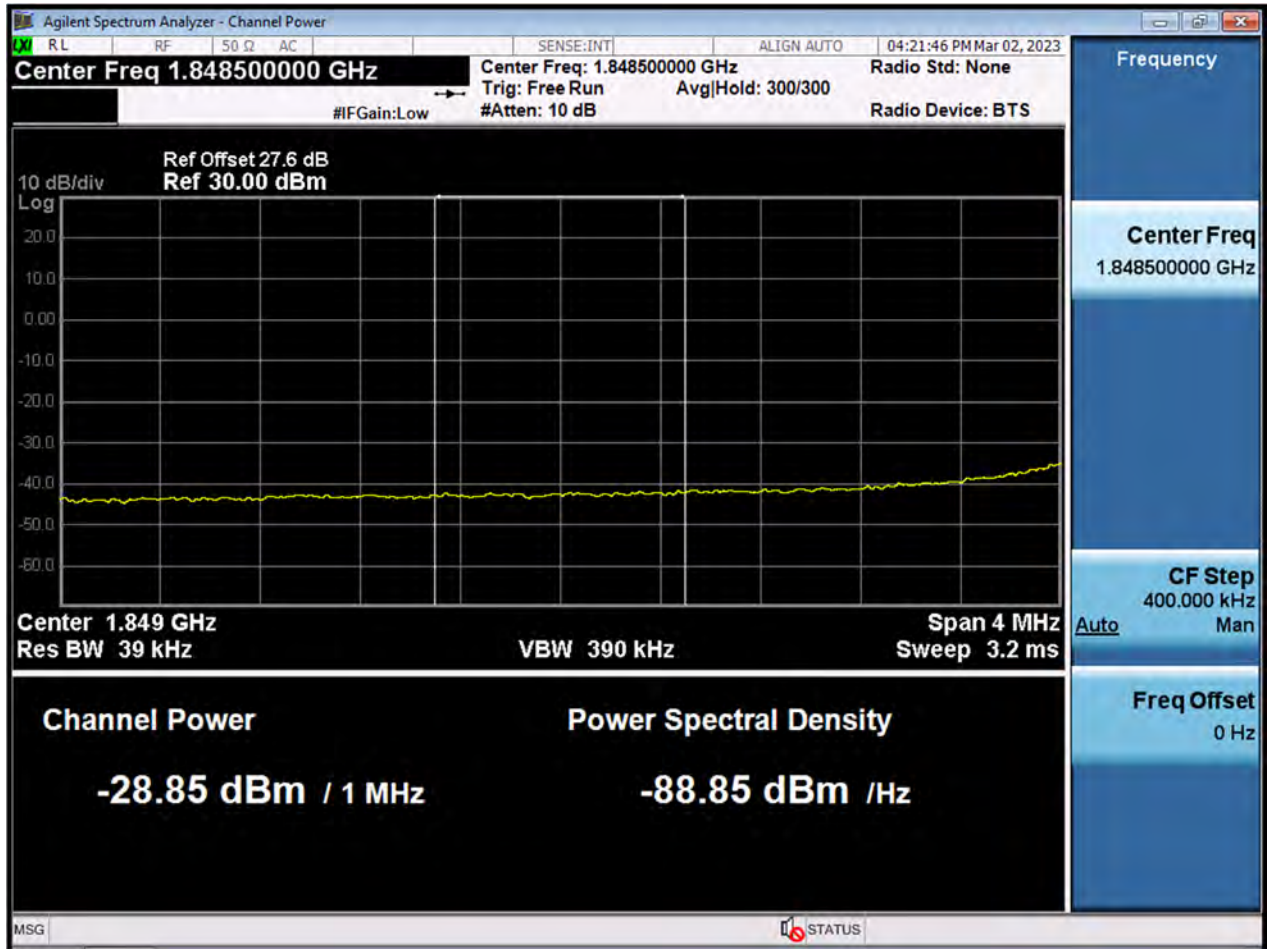




BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)





BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

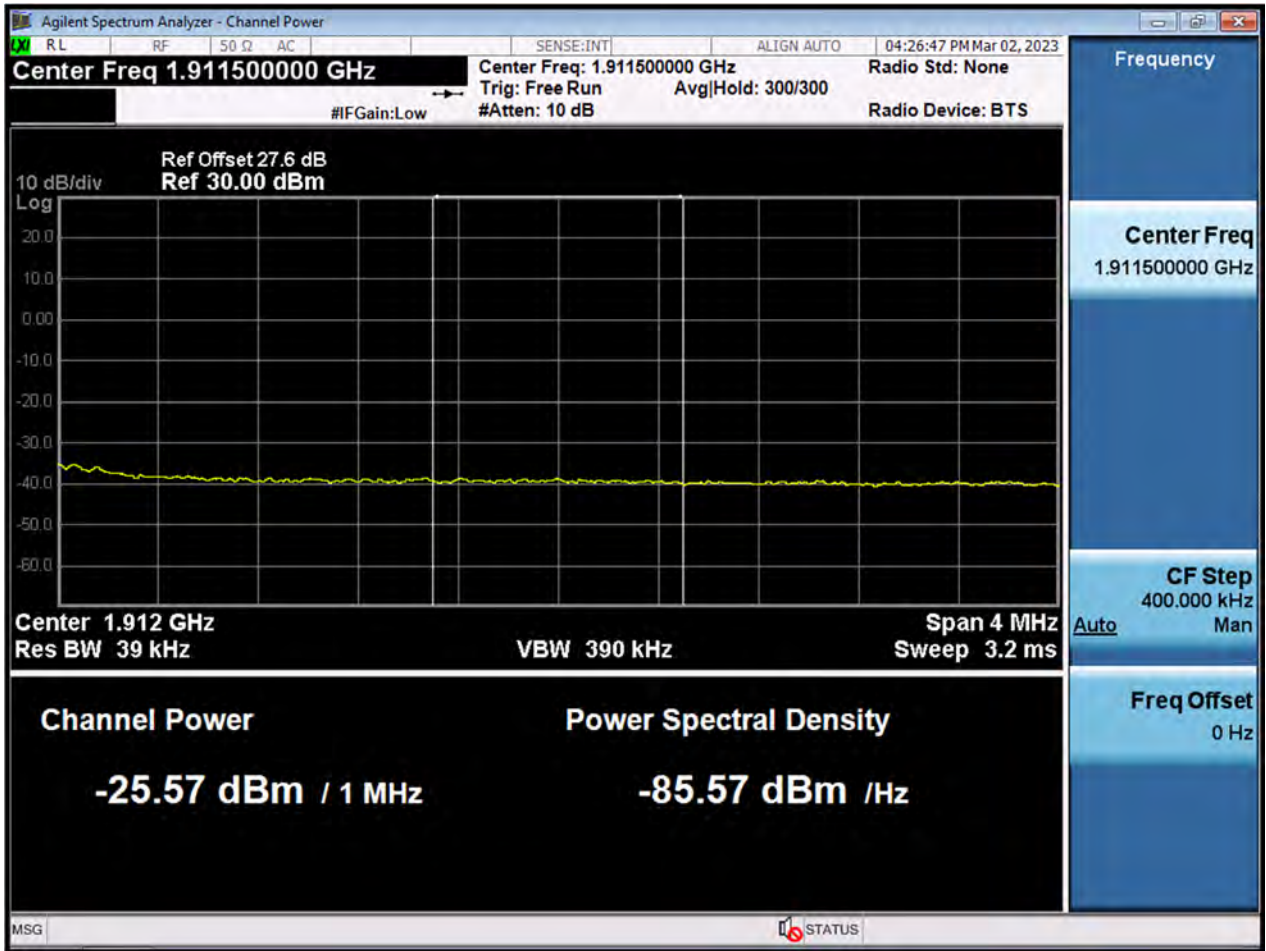




BW20 M_BandEdge_Lowest Channel_QPSK_1RB






BW20 M_BandEdge_Highest Channel_QPSK_1RB

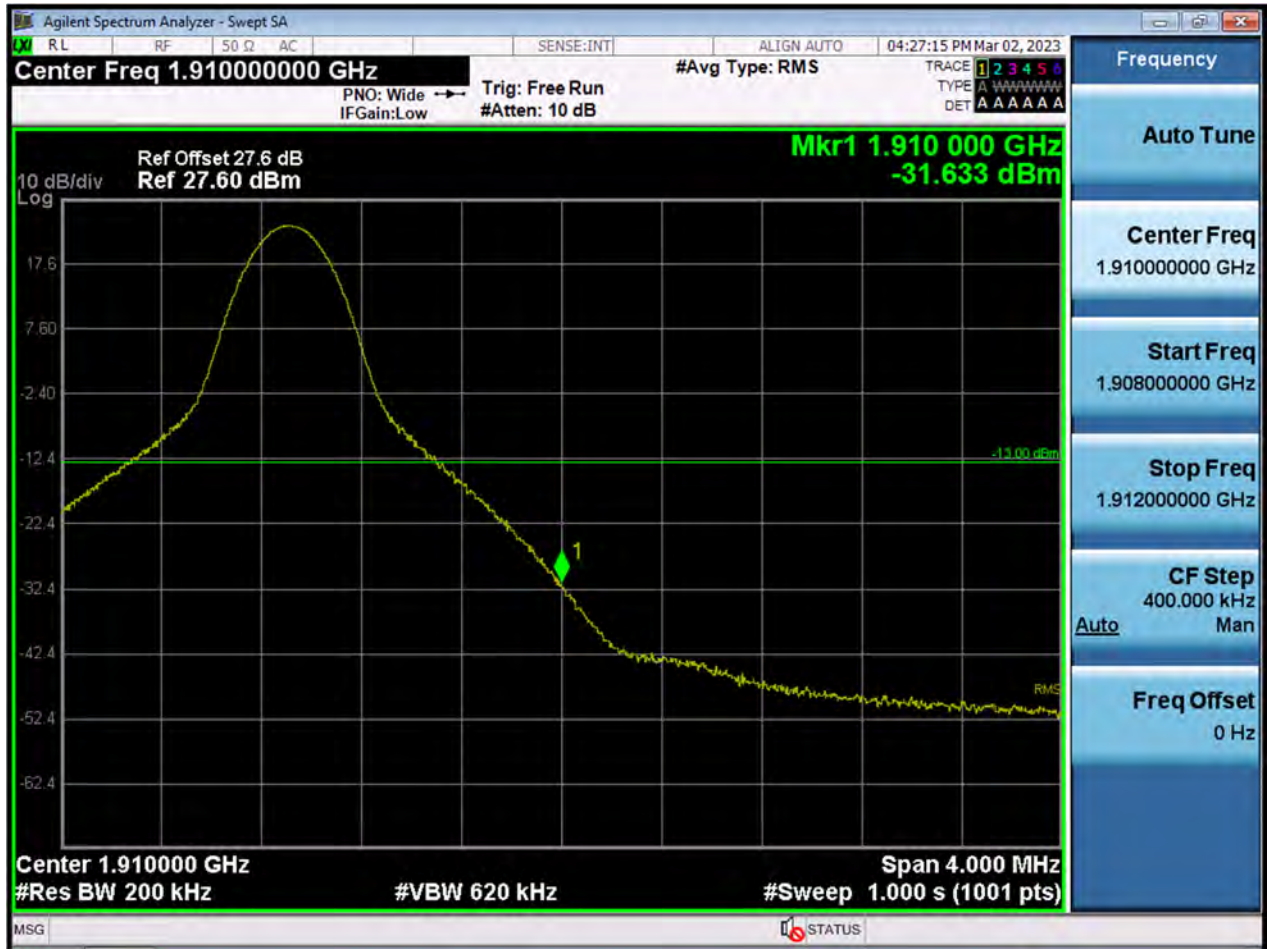




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

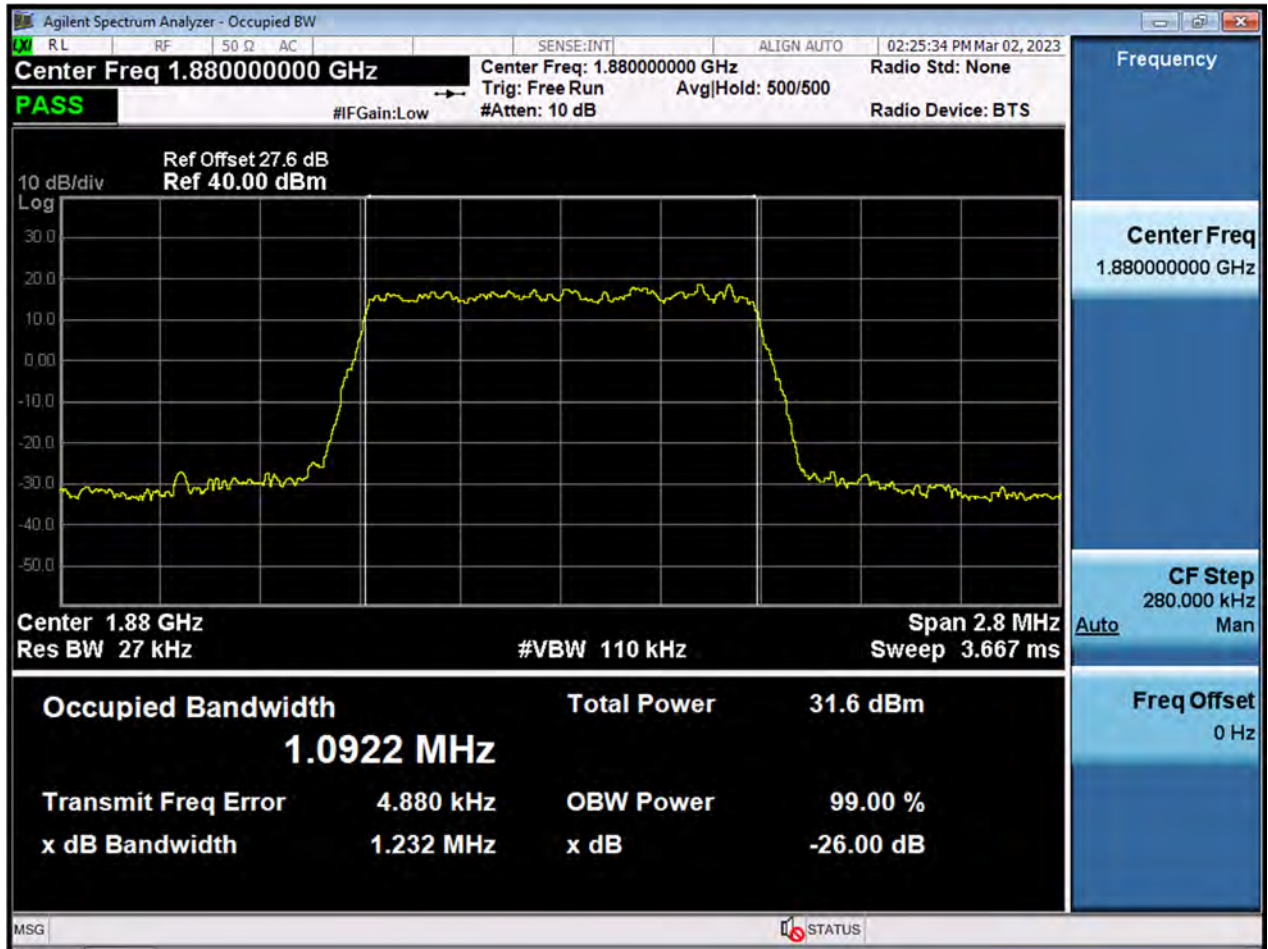




BW1.4 M_OBW_Middle Channel_16QAM_FullRB

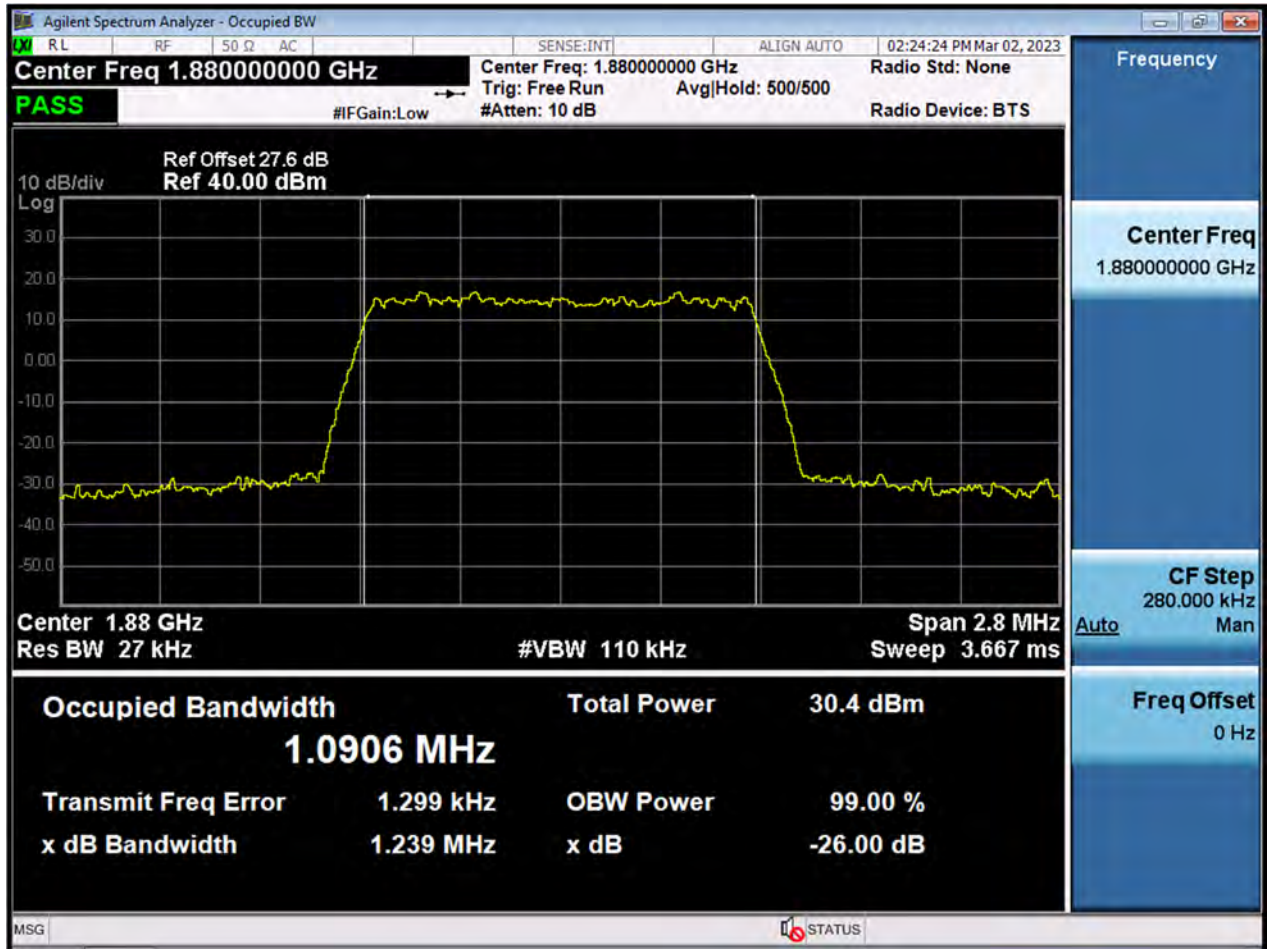




BW1.4 M_OBW_Middle Channel_64QAM_FullRB

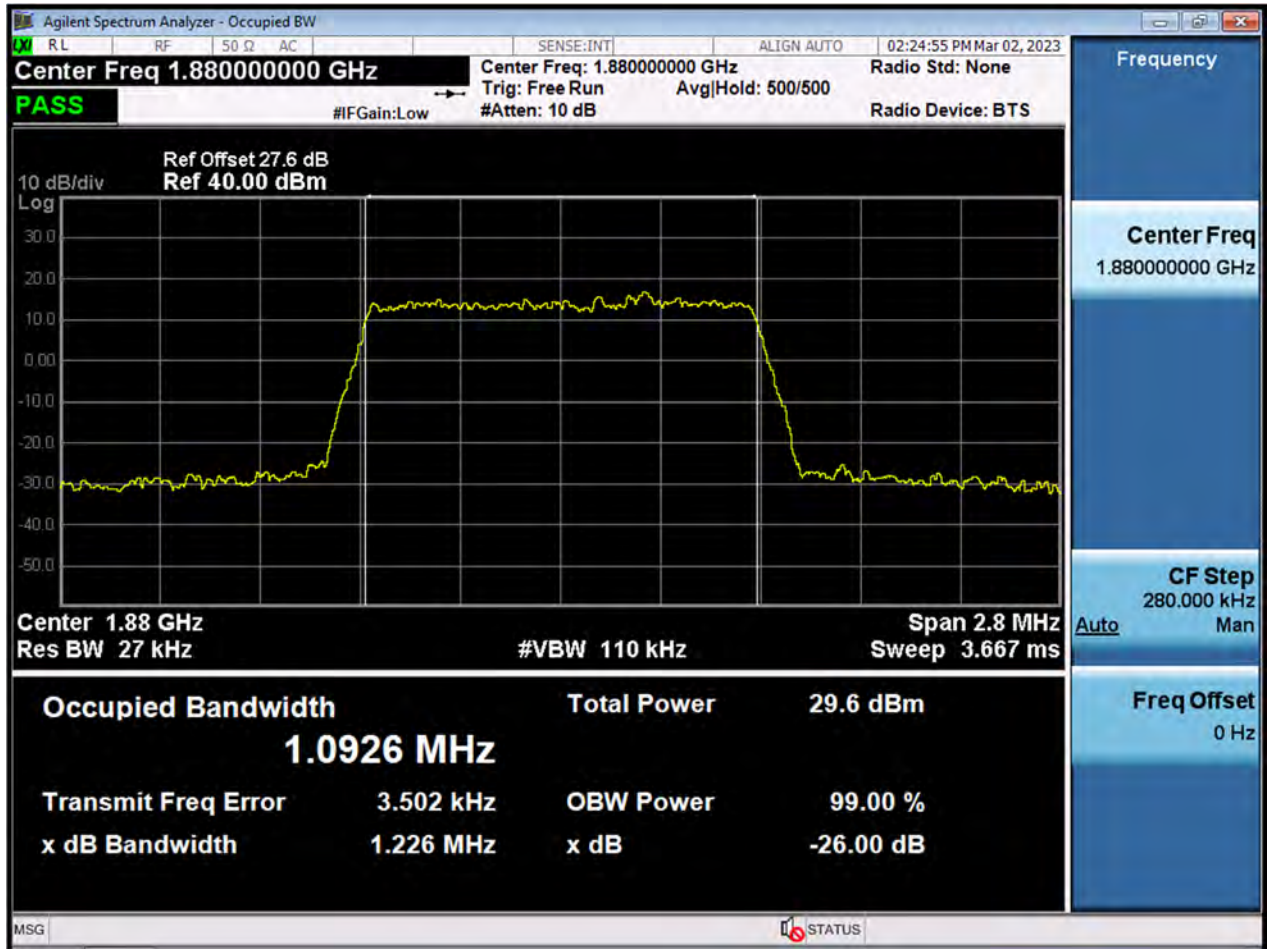




BW1.4 M_OBW_Middle Channel_256QAM_FullRB

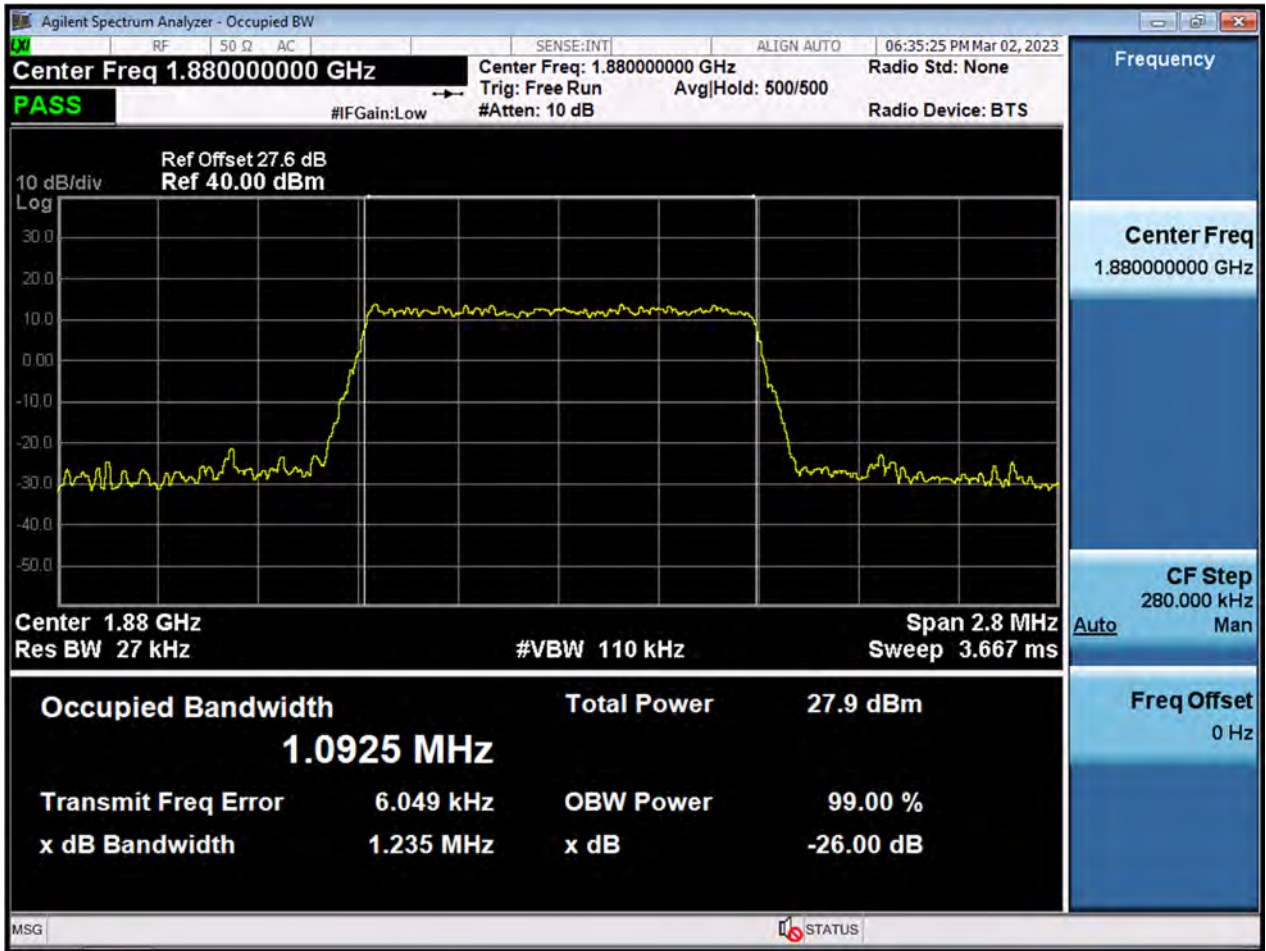




BW3 M_OBW_Middle Channel_QPSK_FullRB

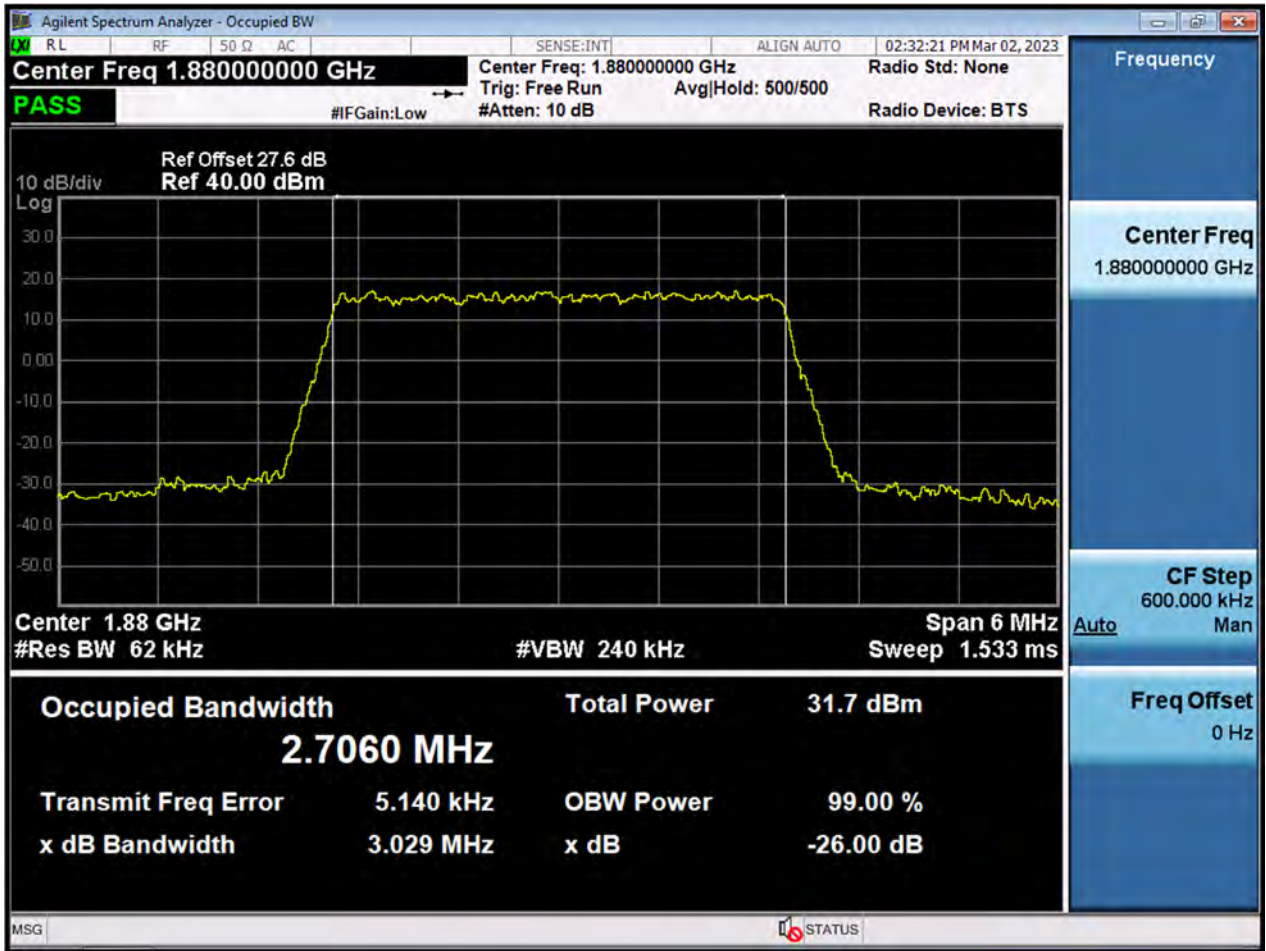




BW3 M_OBW_Middle Channel_16QAM_FullRB

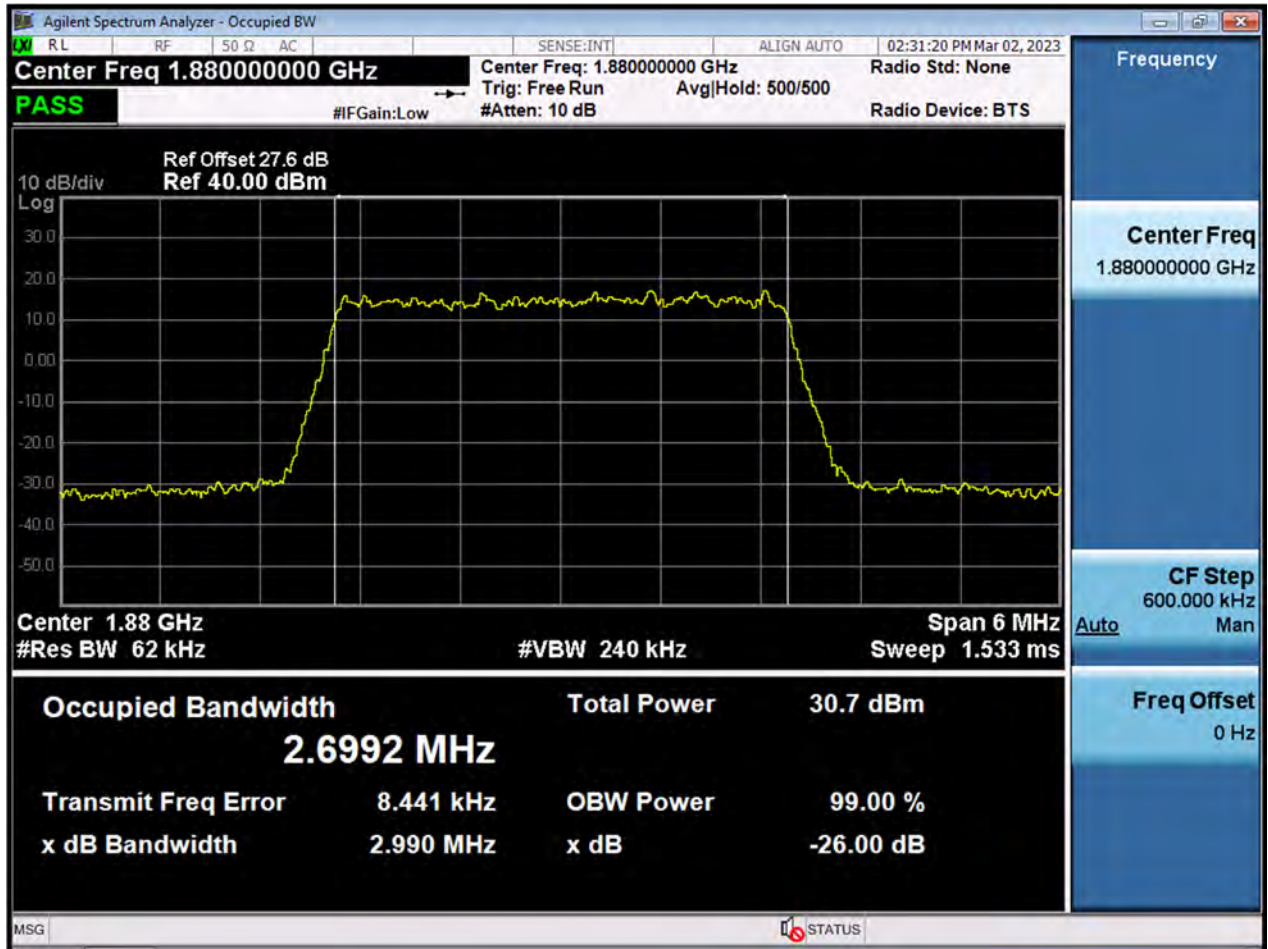




BW3 M_OBW_Middle Channel_64QAM_FullRB

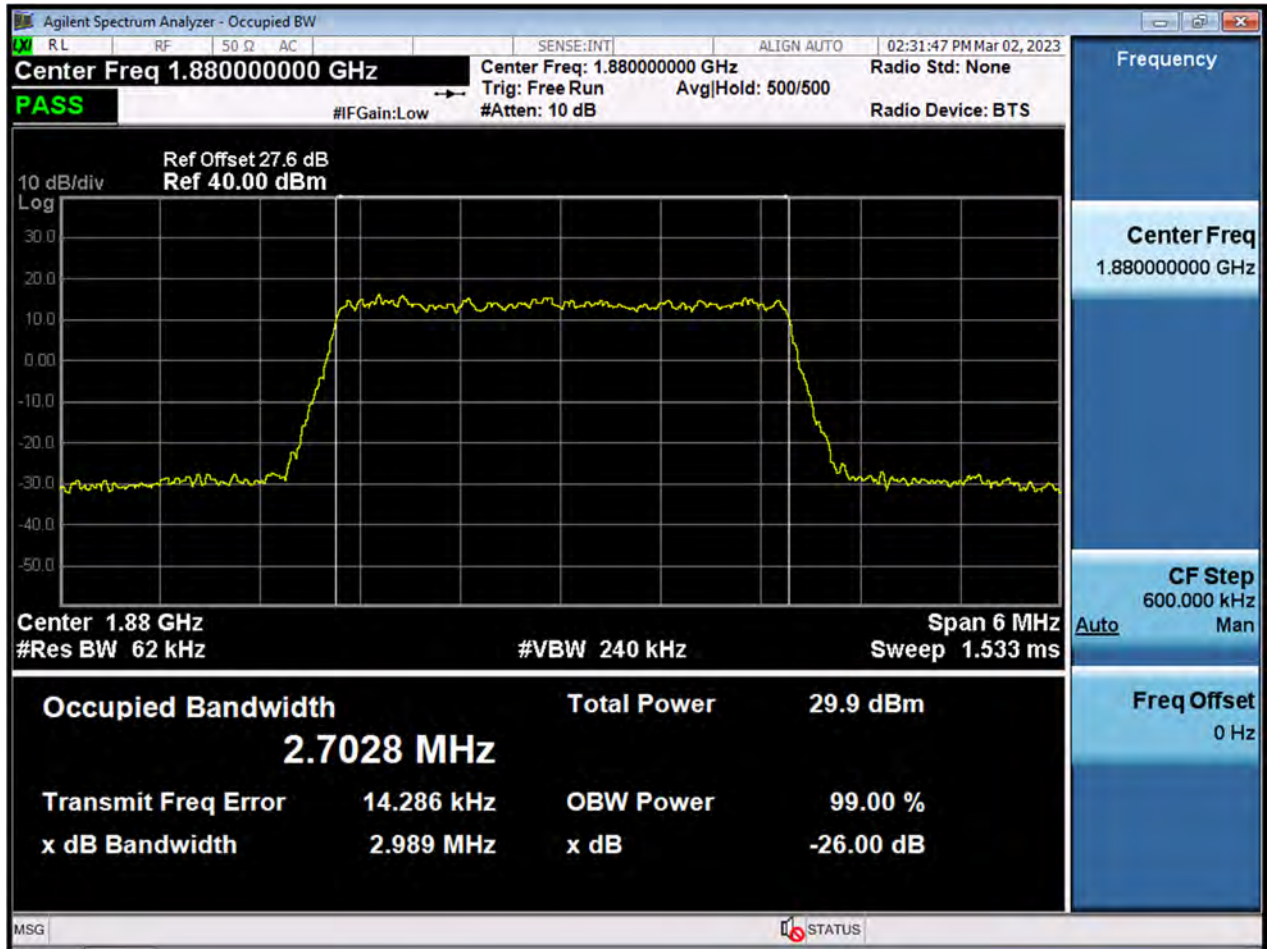




BW3 M_OBW_Middle Channel_256QAM_FullRB

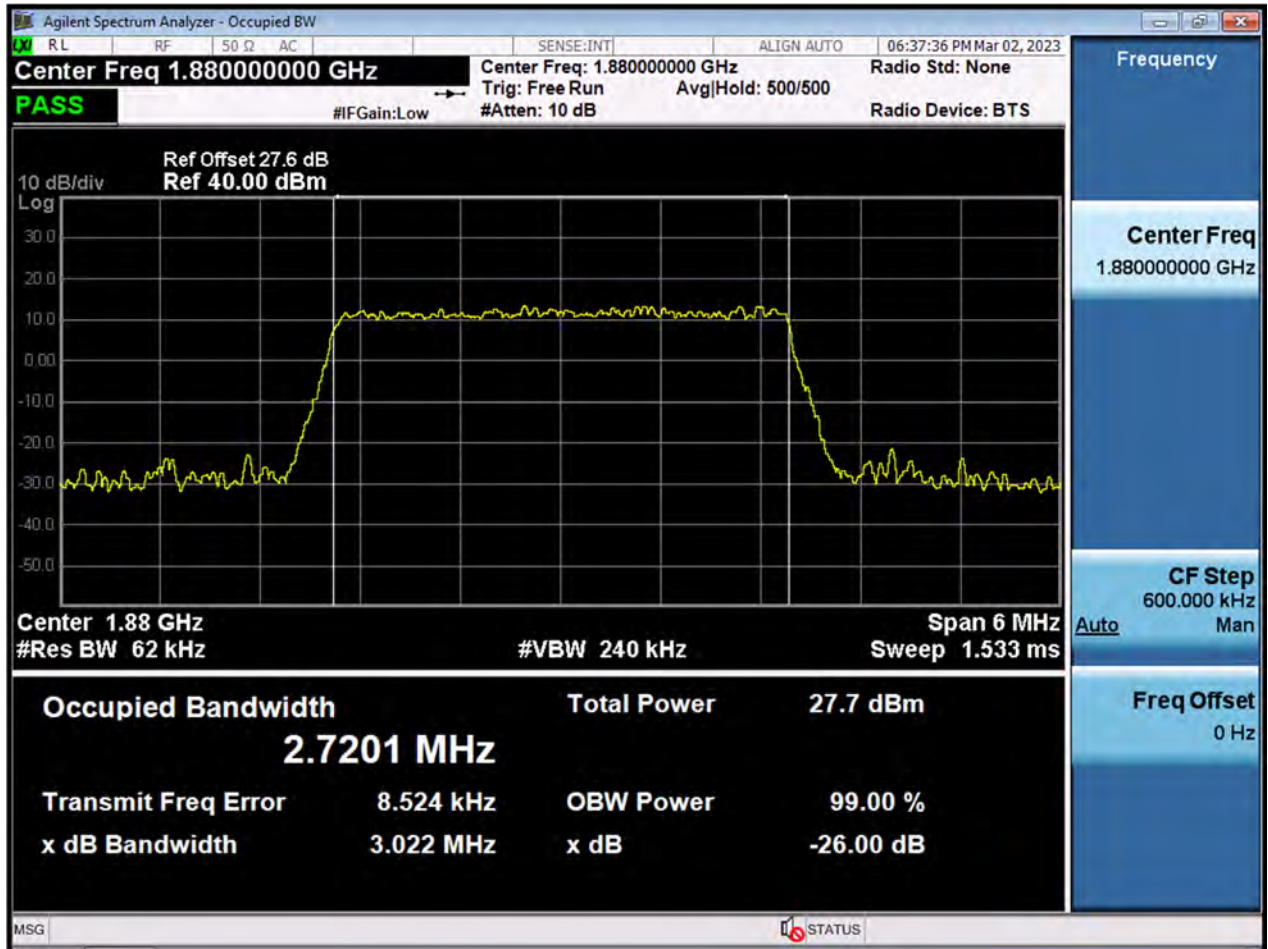




BW5 M_OBW_Middle Channel_QPSK_FullRB

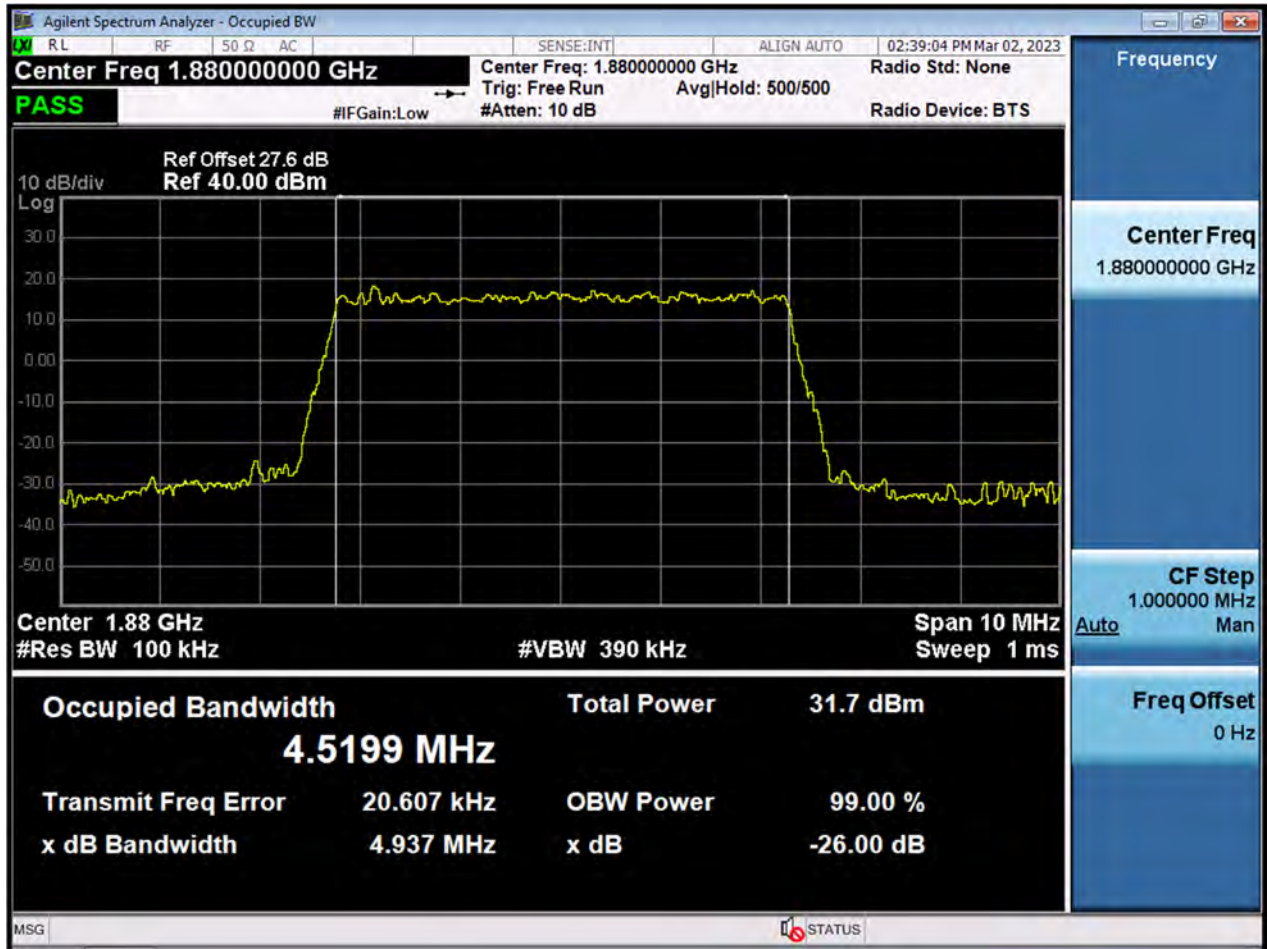




BW5 M_OBW_Middle Channel_16QAM_FullRB

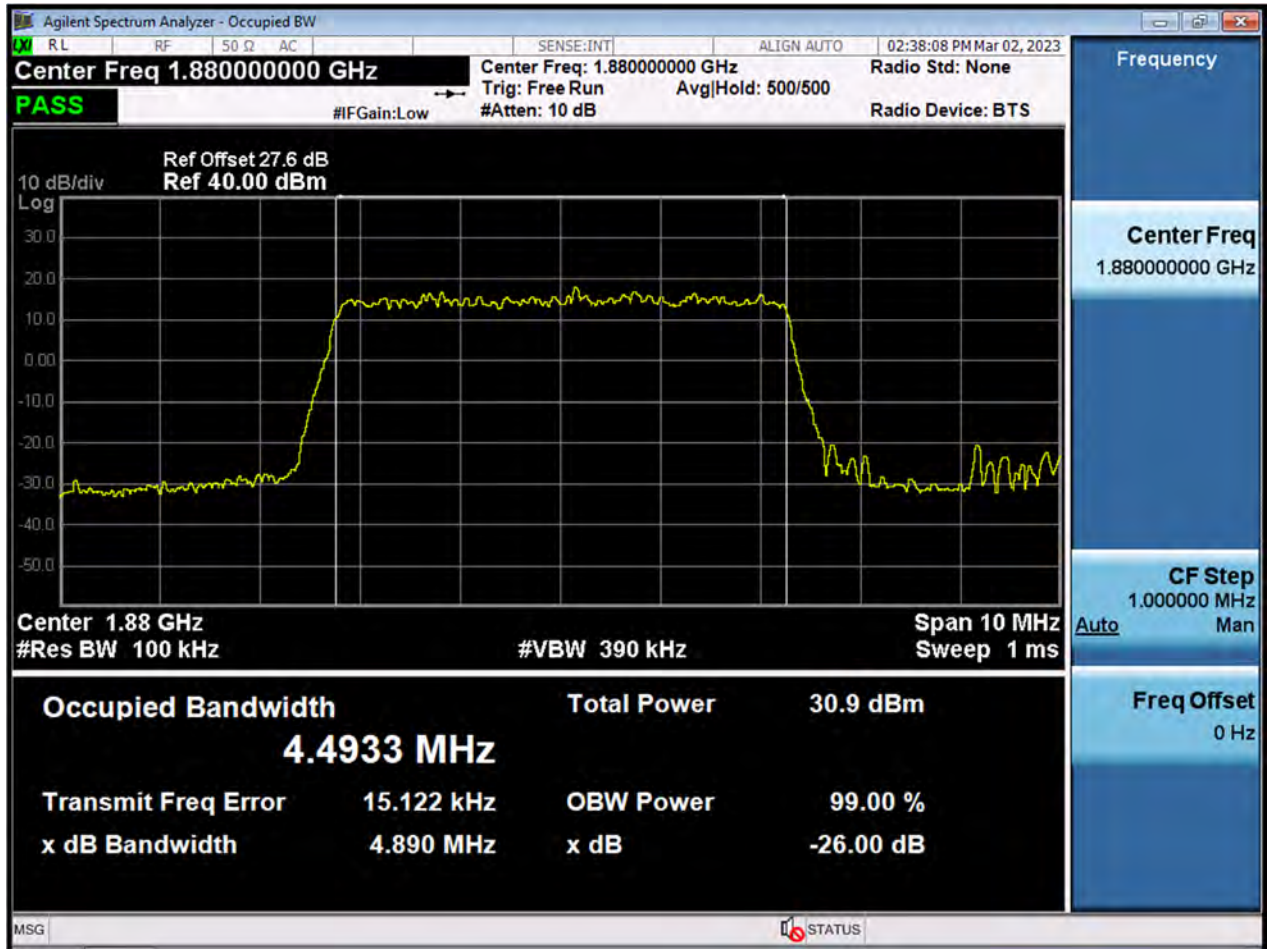




BW5 M_OBW_Middle Channel_64QAM_FullRB

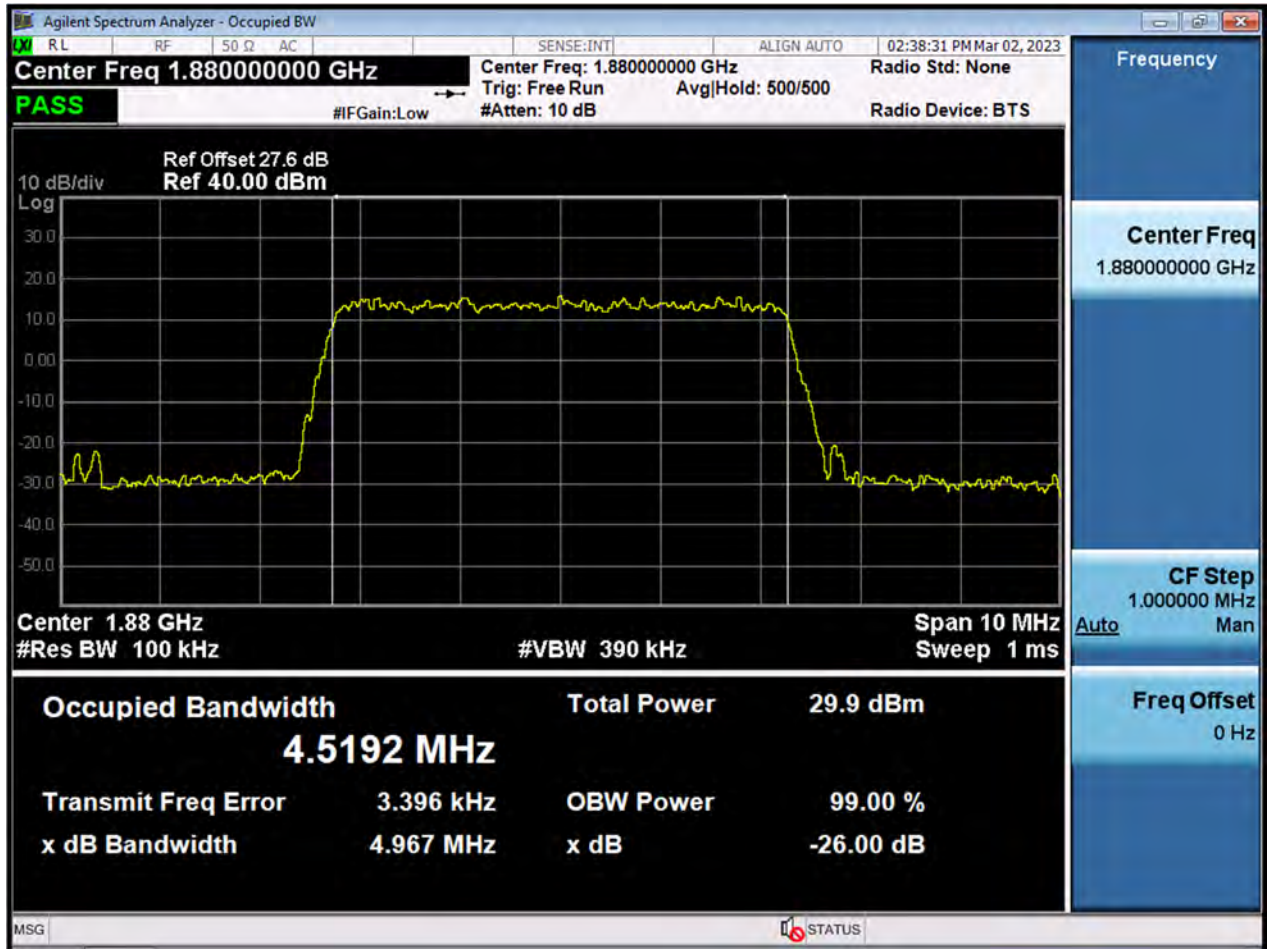




BW5 M_OBW_Middle Channel_256QAM_FullRB

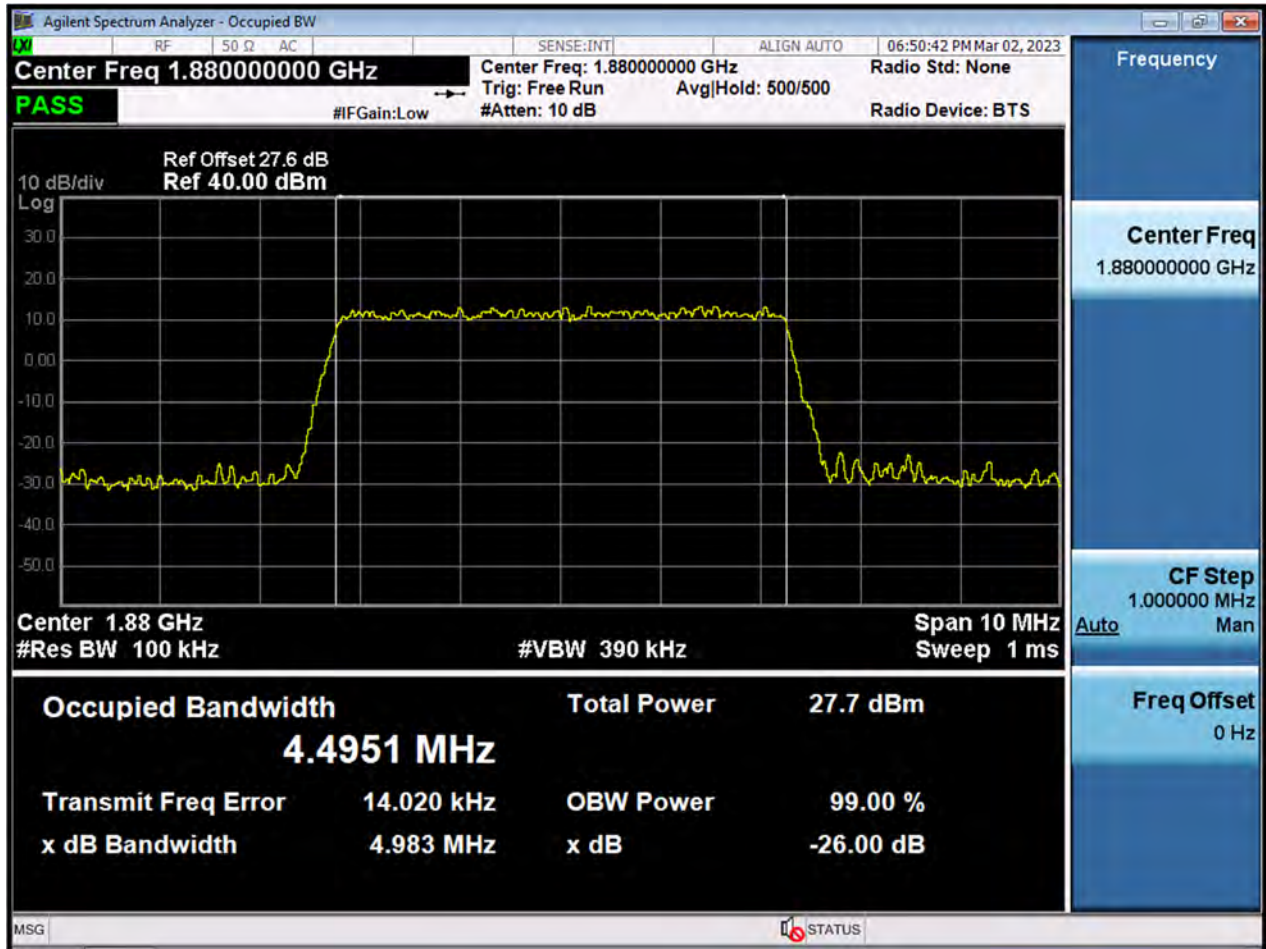




BW10 M_OBW_Middle Channel_QPSK_FullRB

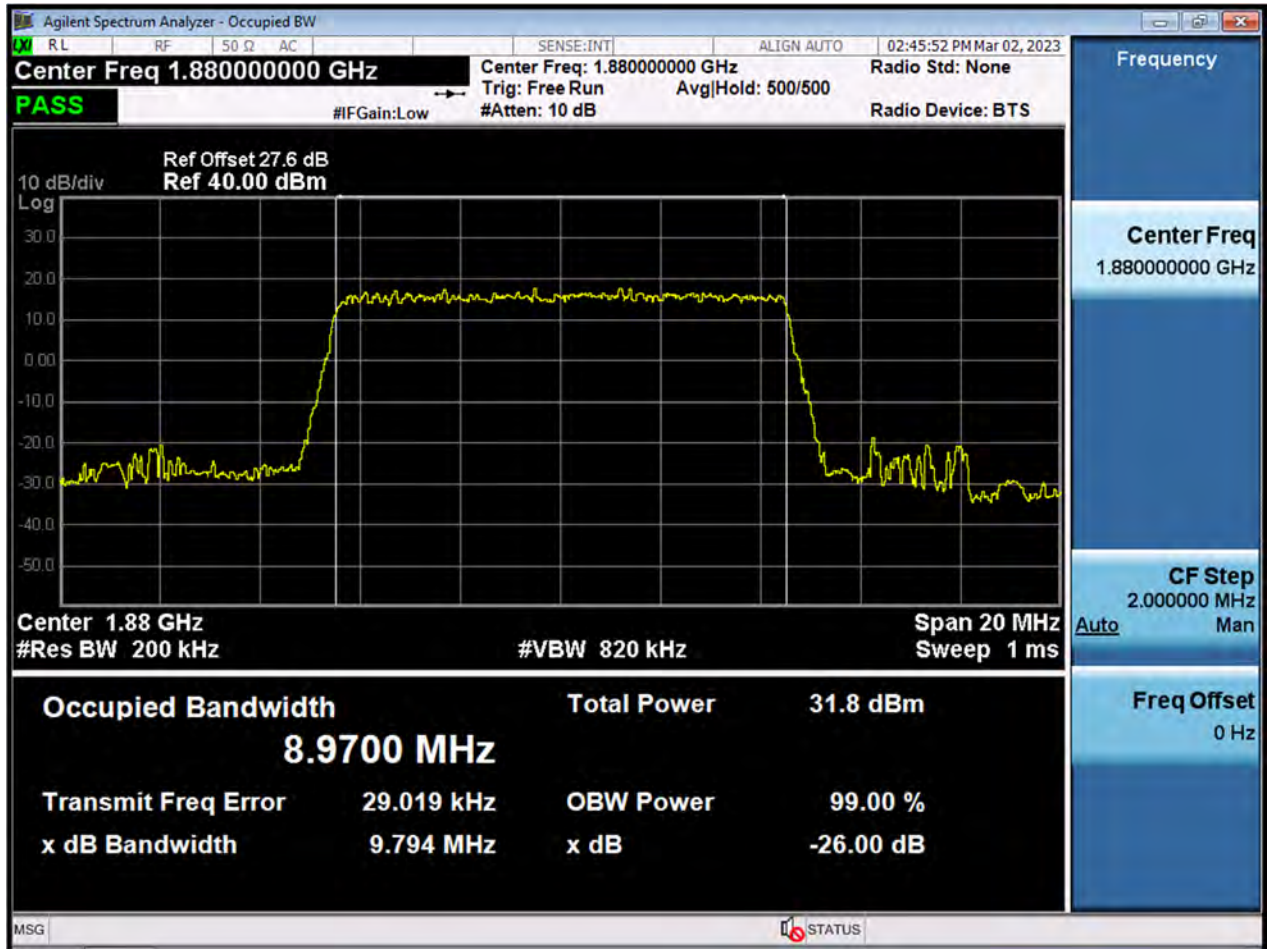




BW10 M_OBW_Middle Channel_16QAM_FullRB

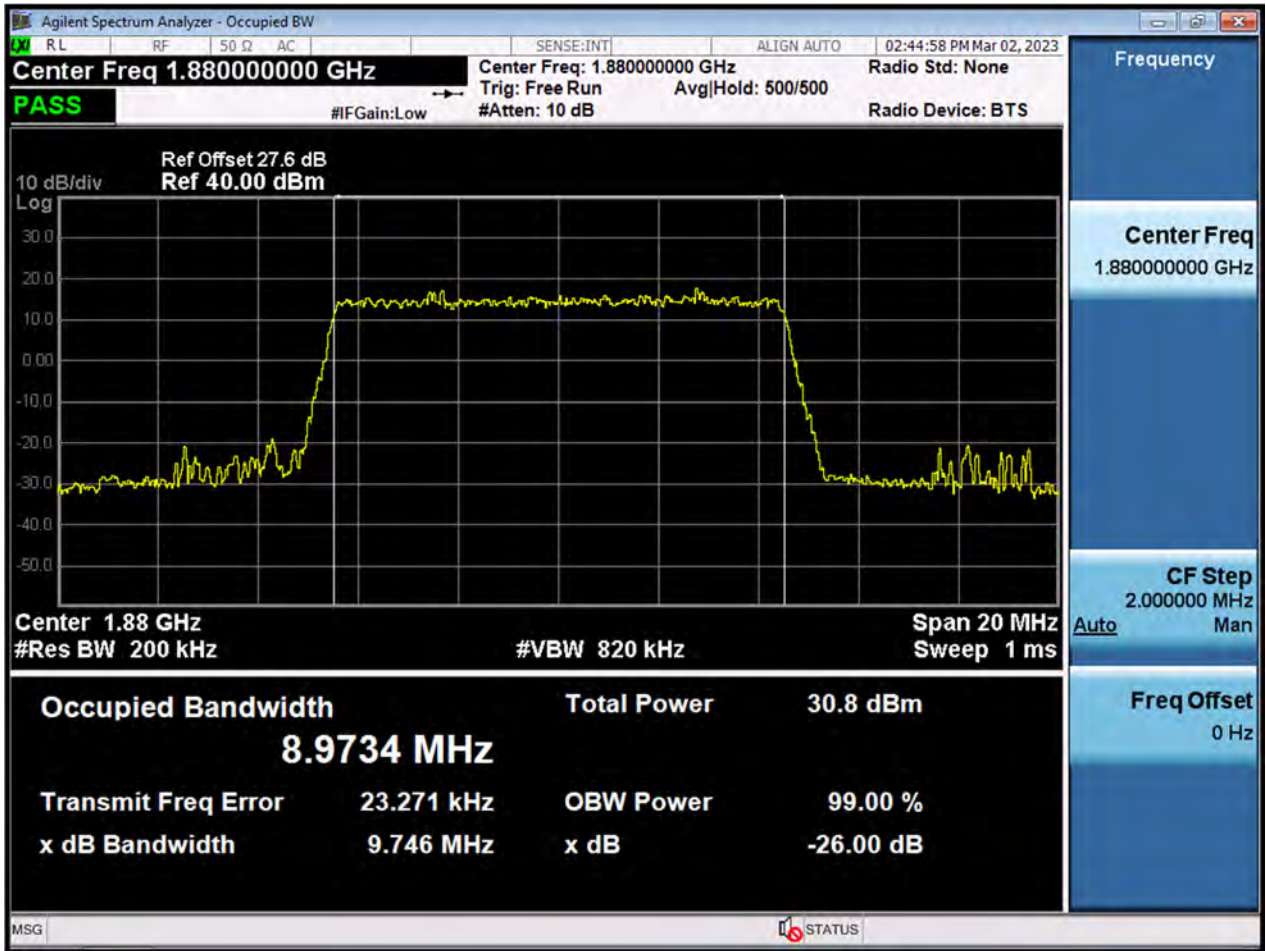


BW10 M_OBW_Middle Channel_64QAM_FullRB

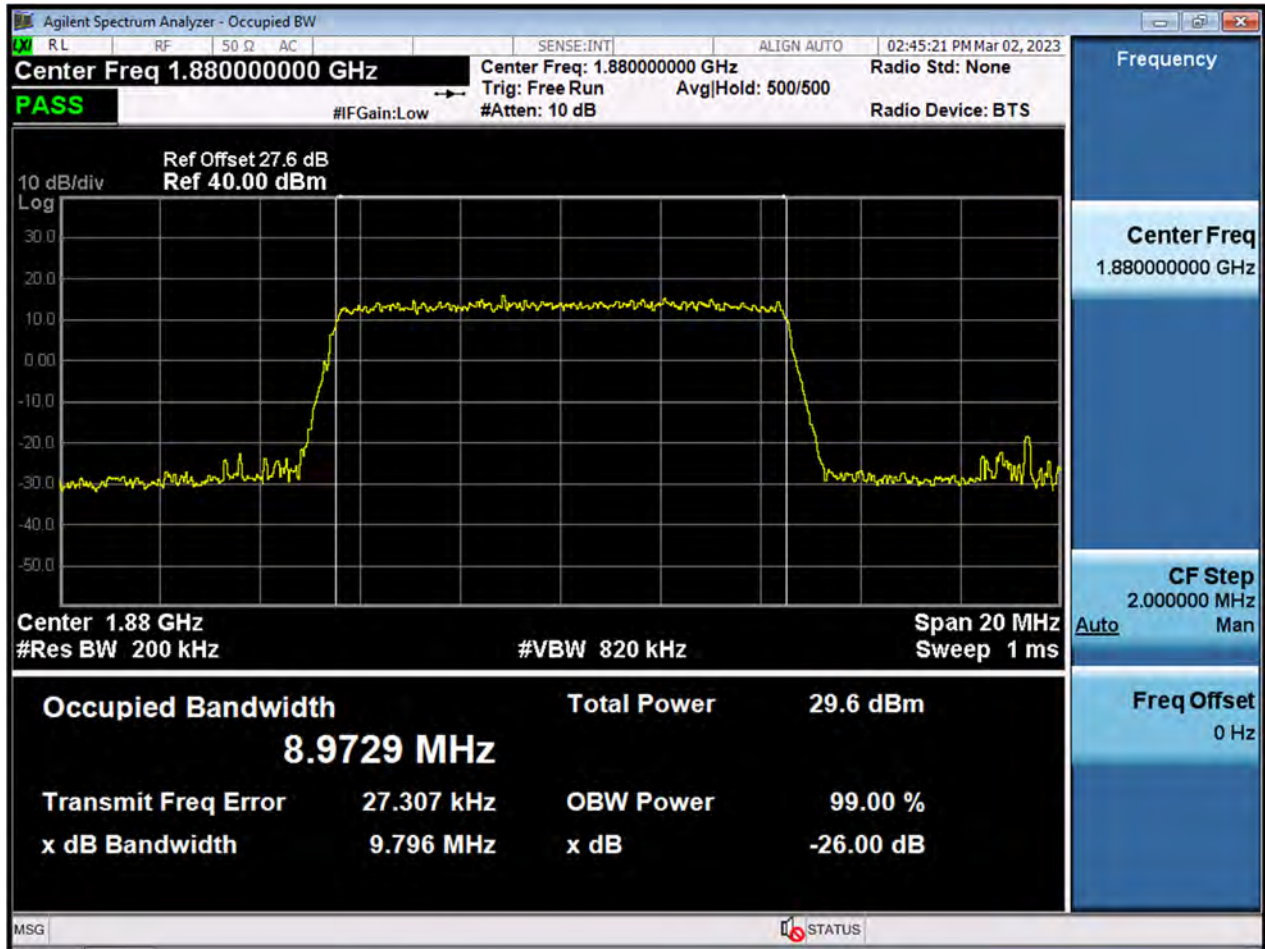




BW10 M_OBW_Middle Channel_256QAM_FullRB

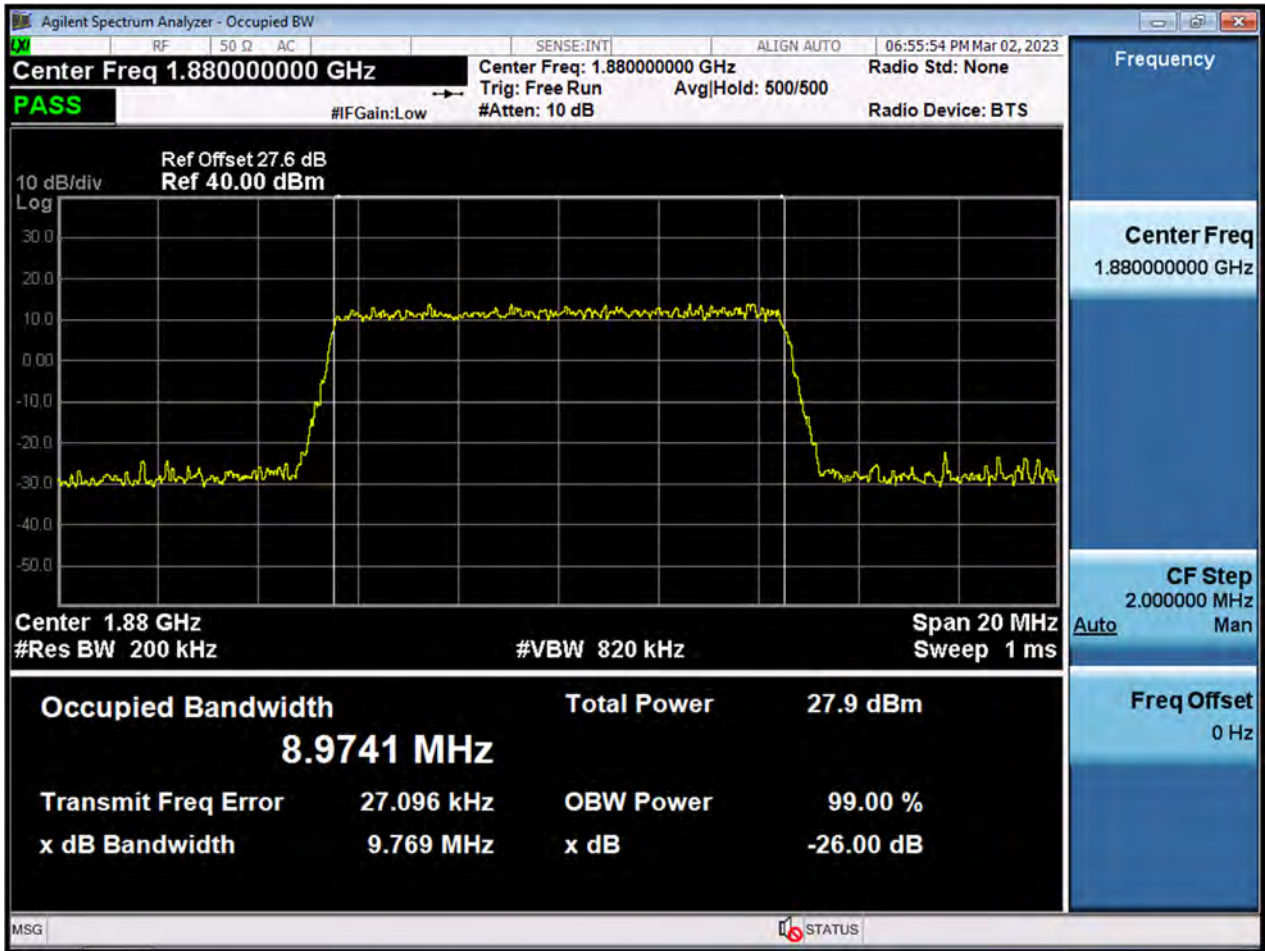


BW15 M_OBW_Middle Channel_QPSK_FullRB

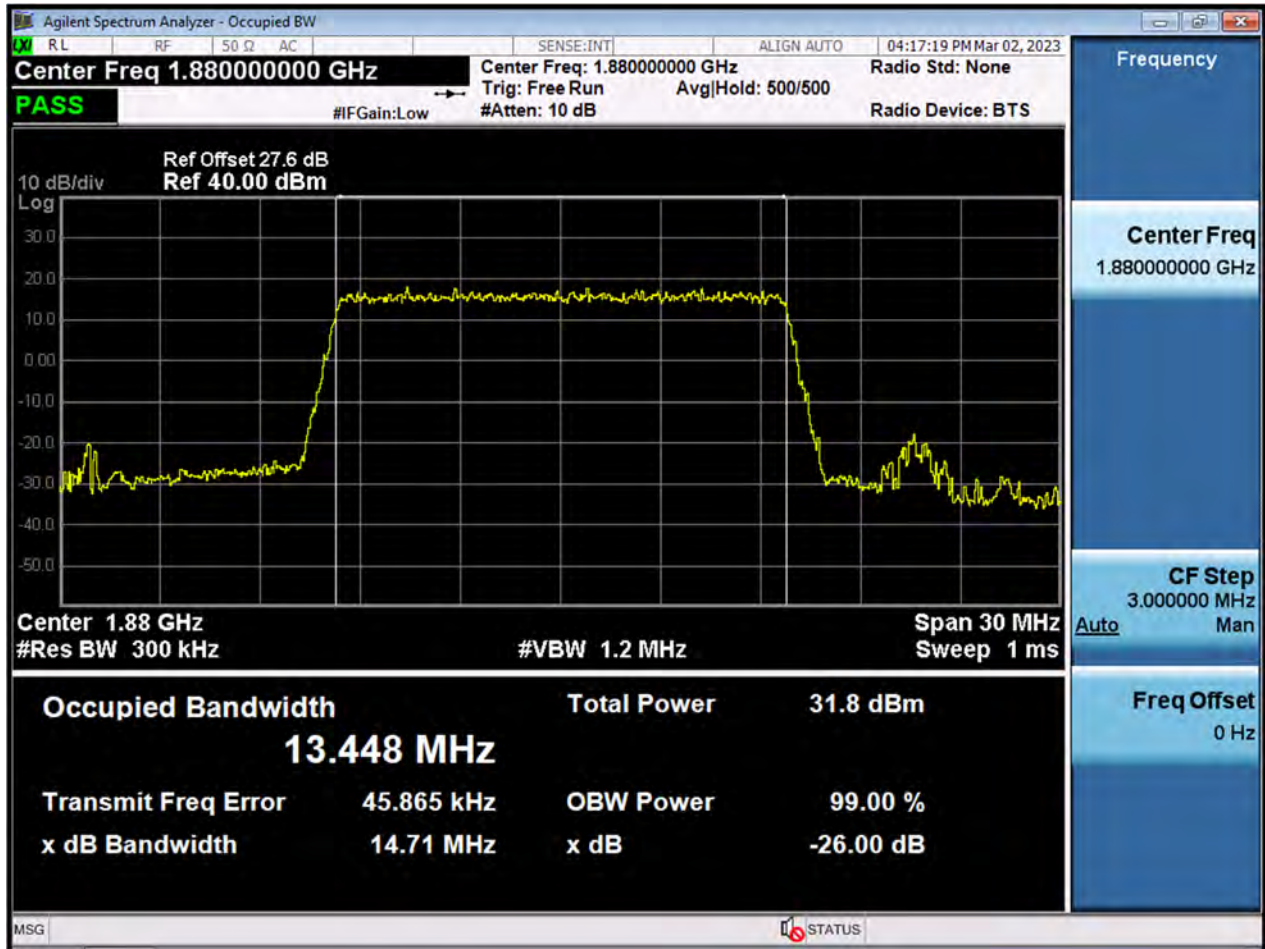




BW15 M_OBW_Middle Channel_16QAM_FullRB

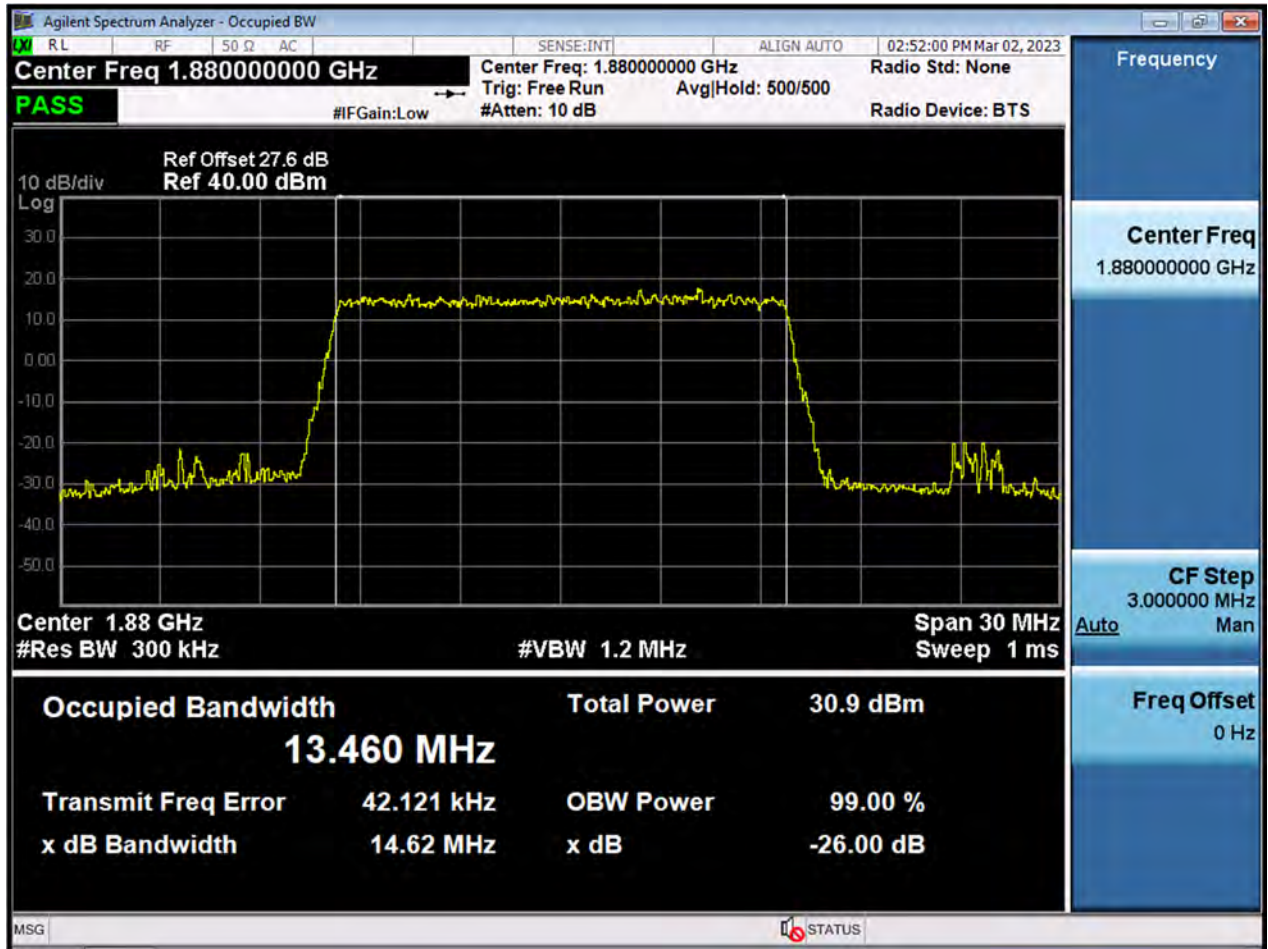




BW15 M_OBW_Middle Channel_64QAM_FullRB

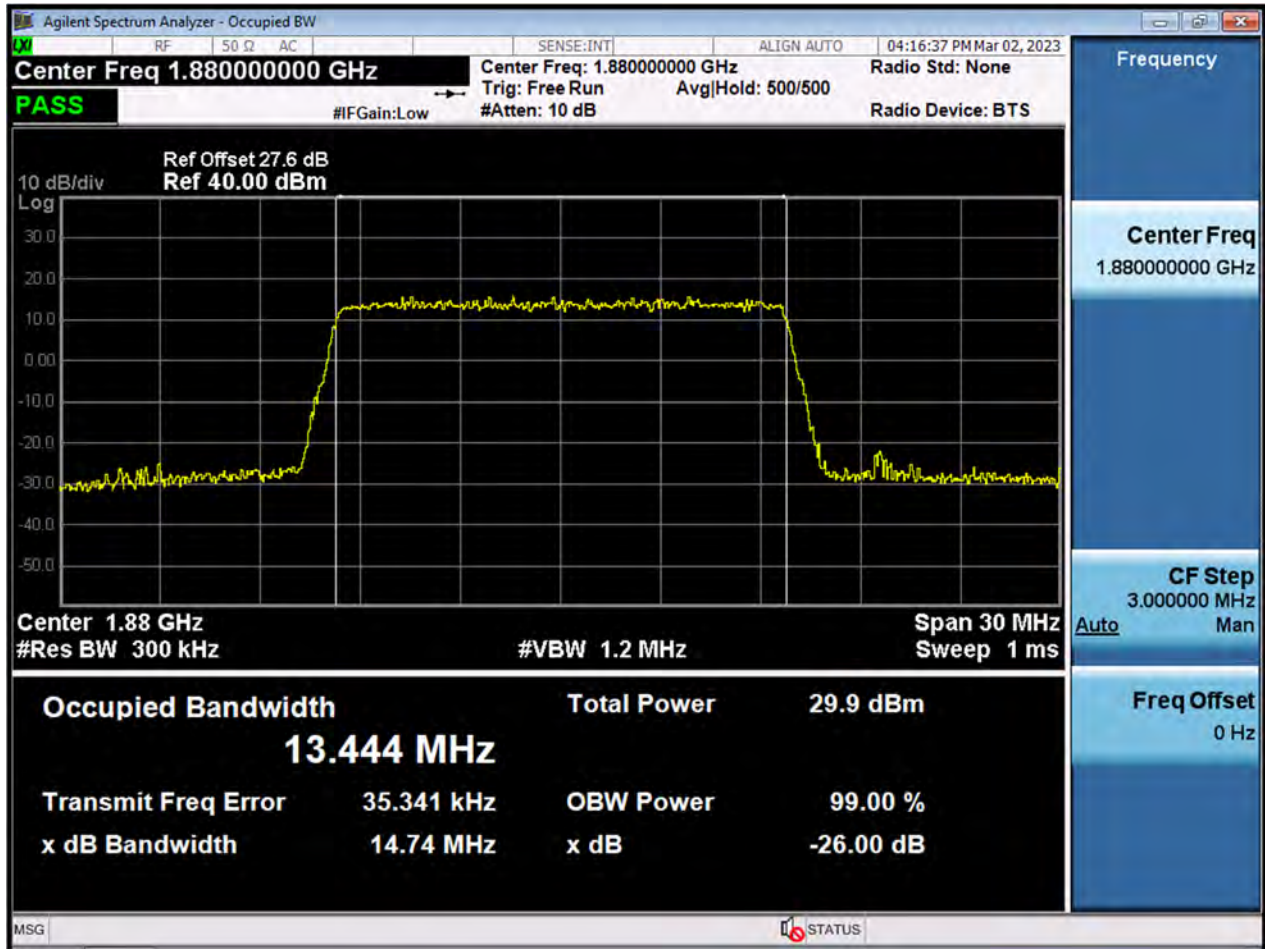




BW15 M_OBW_Middle Channel_256QAM_FullRB

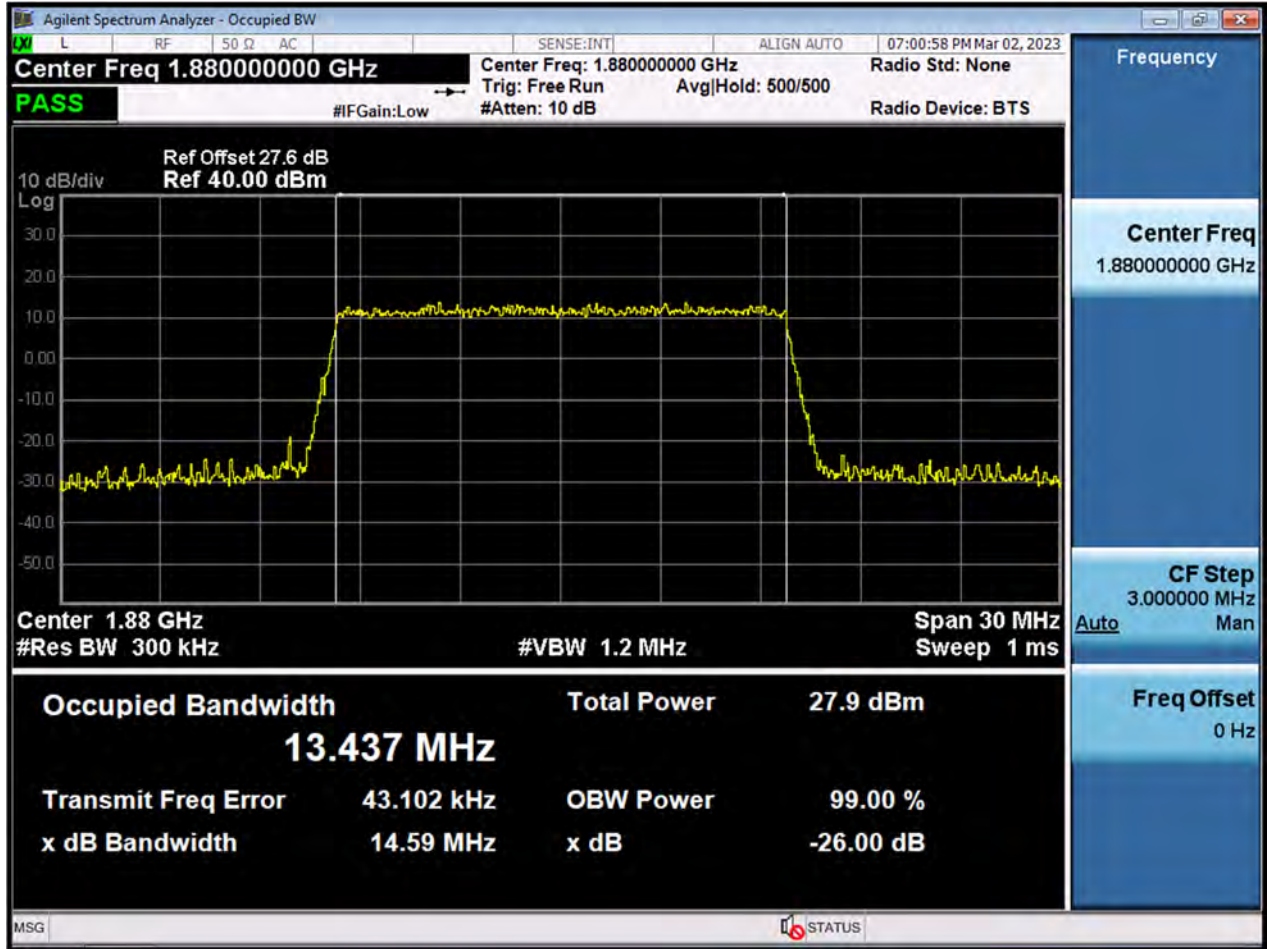


BW20 M_OBW_Middle Channel_QPSK_FullRB

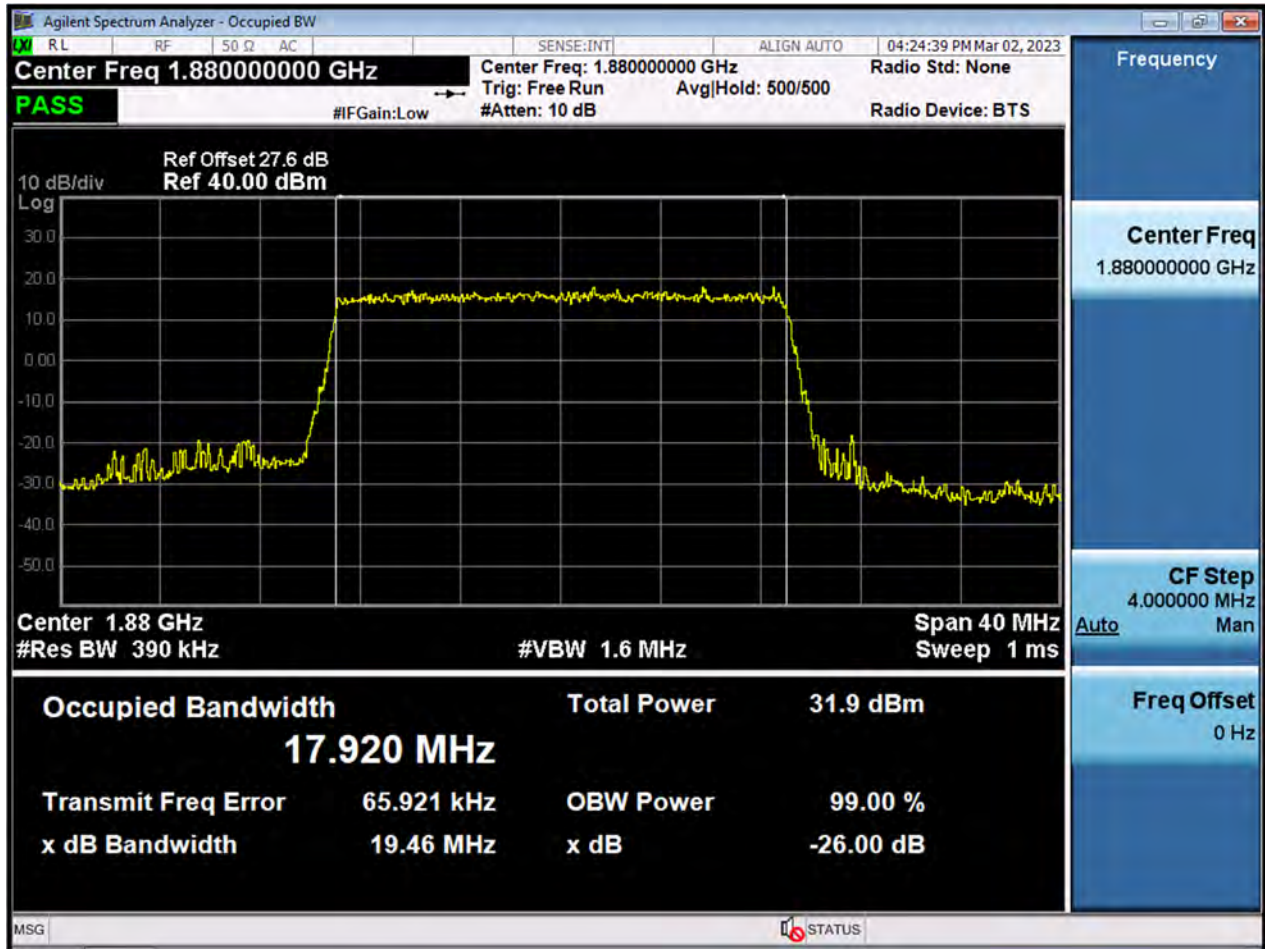




BW20 M_OBW_Middle Channel_16QAM_FullRB

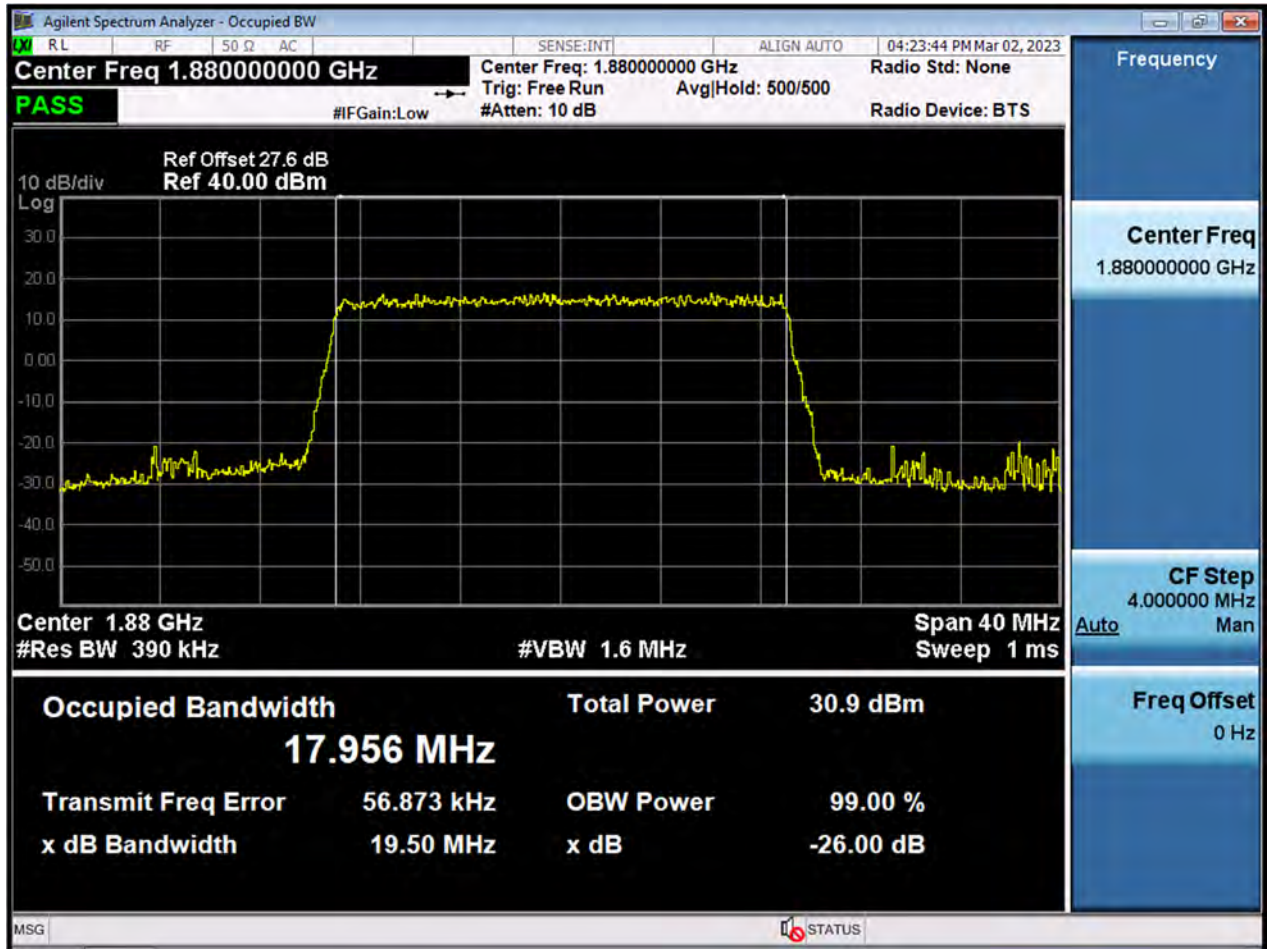




BW20 M_OBW_Middle Channel_64QAM_FullRB

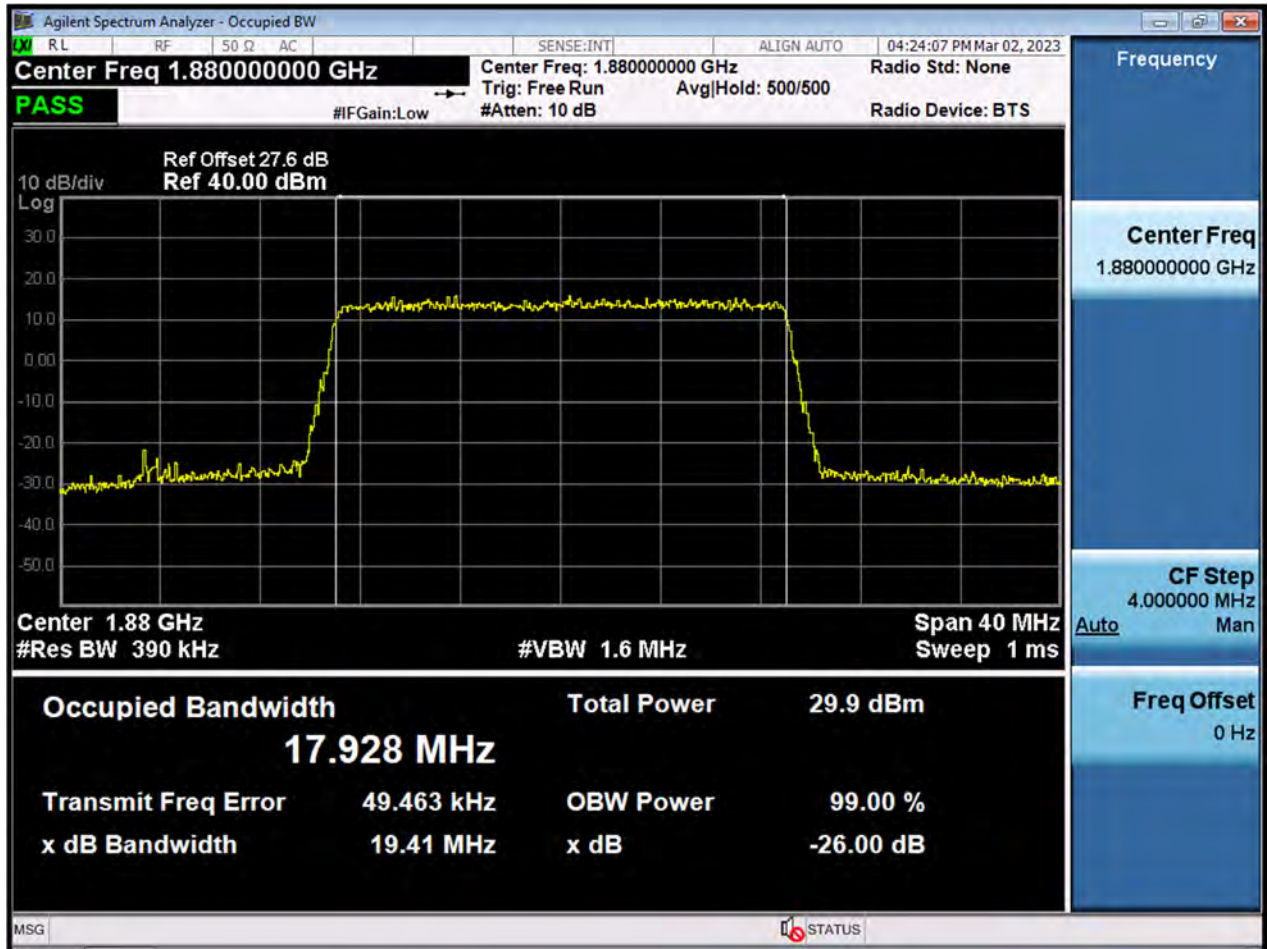




BW20 M_OBW_Middle Channel_256QAM_FullRB

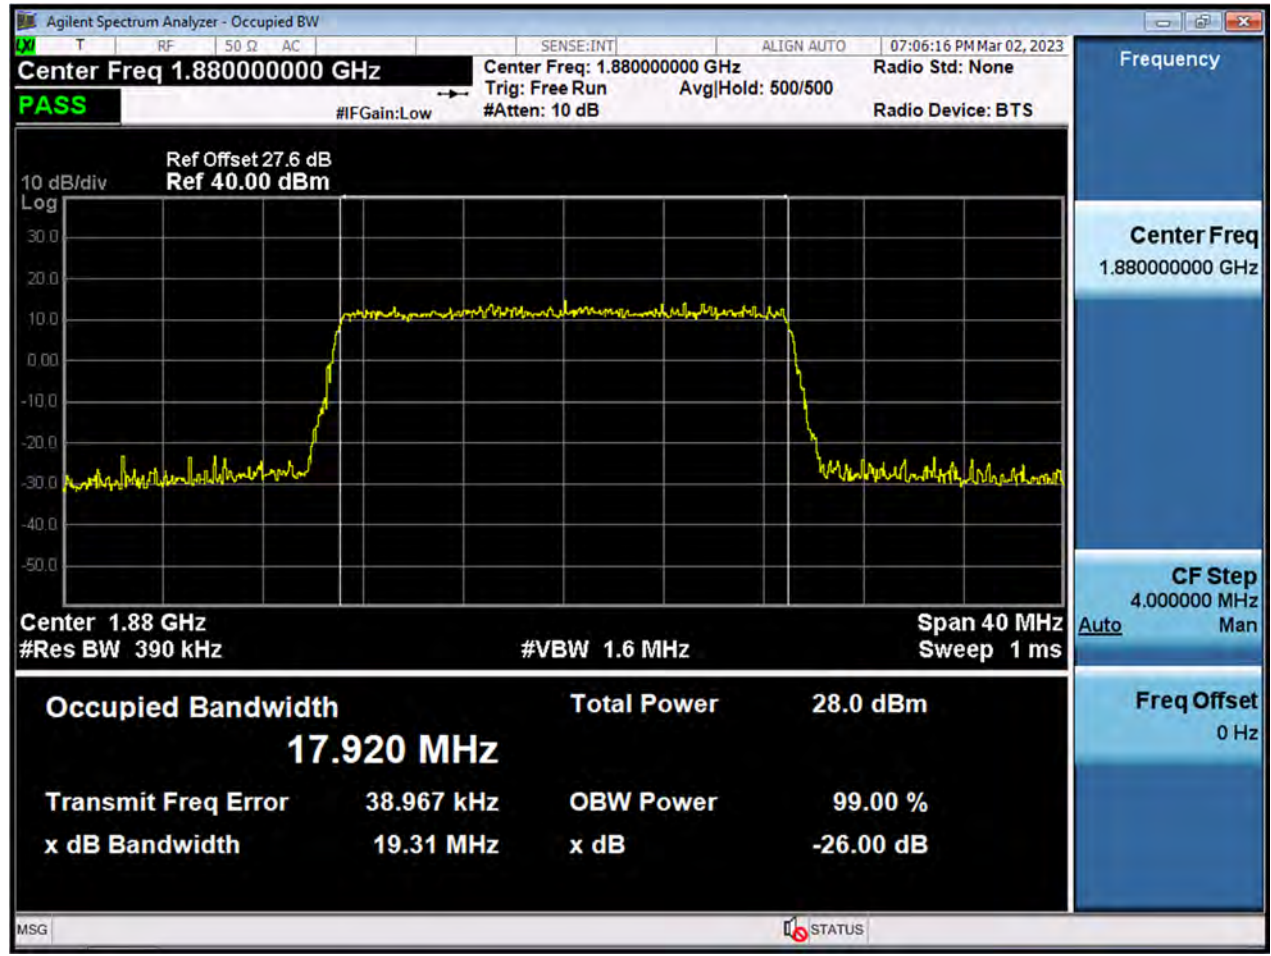




BW1.4 M_PAR_Middle Channel_QPSK_FullRB

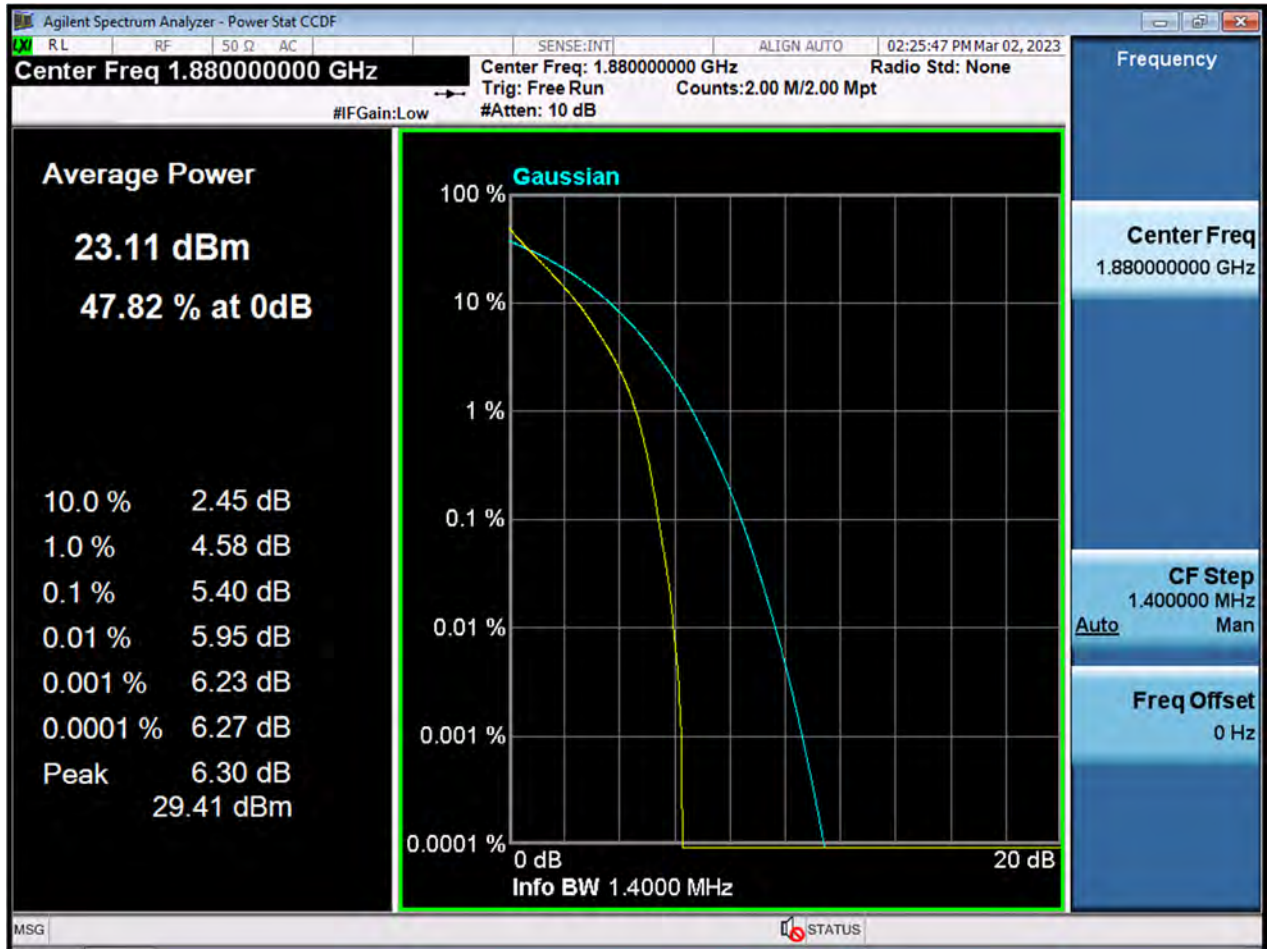



BW1.4 M_PAR_Middle Channel_16QAM_FullRB

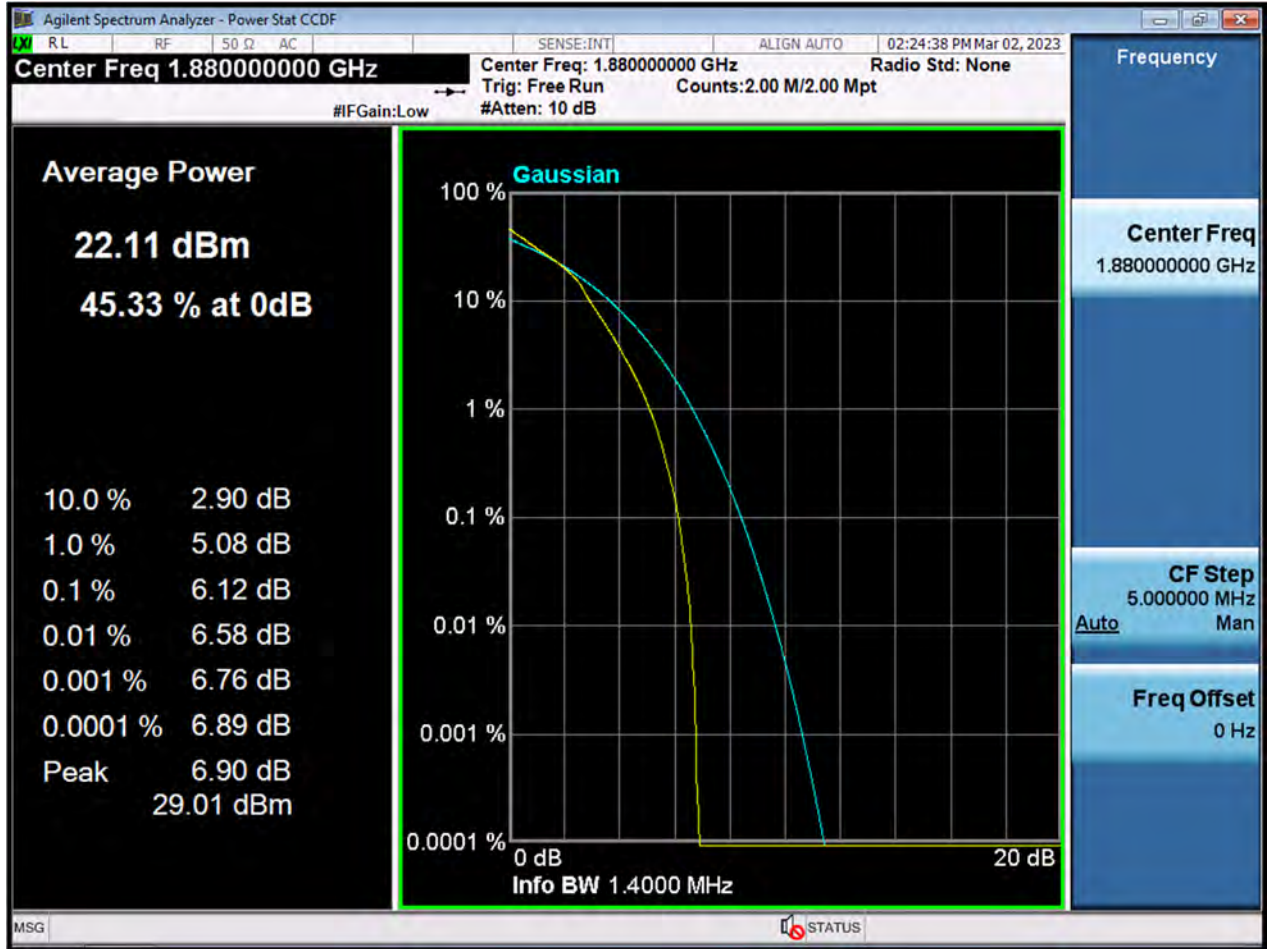




BW1.4 M_PAR_Middle Channel_64QAM_FullRB




BW1.4 M_PAR_Middle Channel_256QAM_FullRB

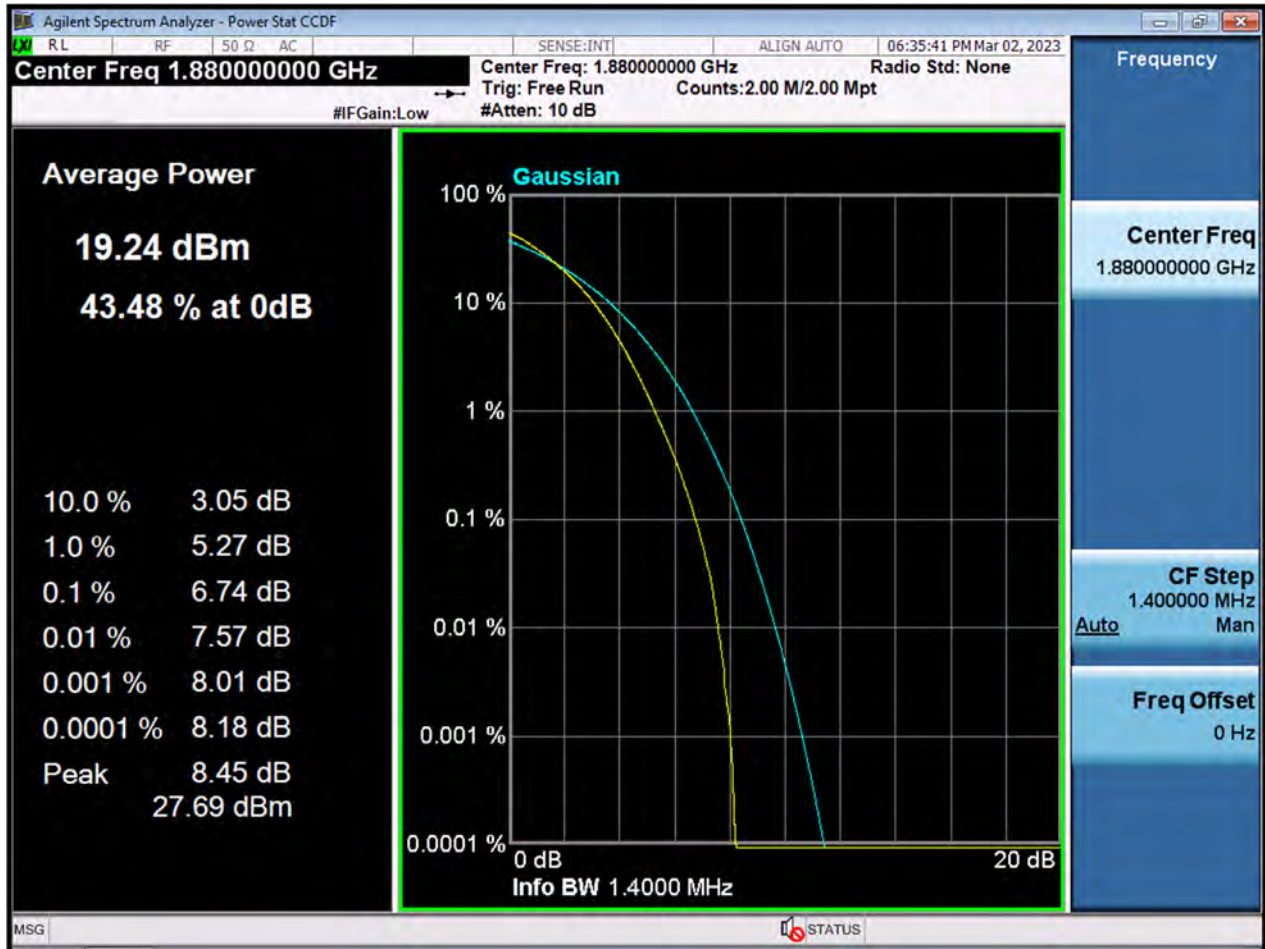




BW3 M_PAR_Middle Channel_QPSK_FullRB

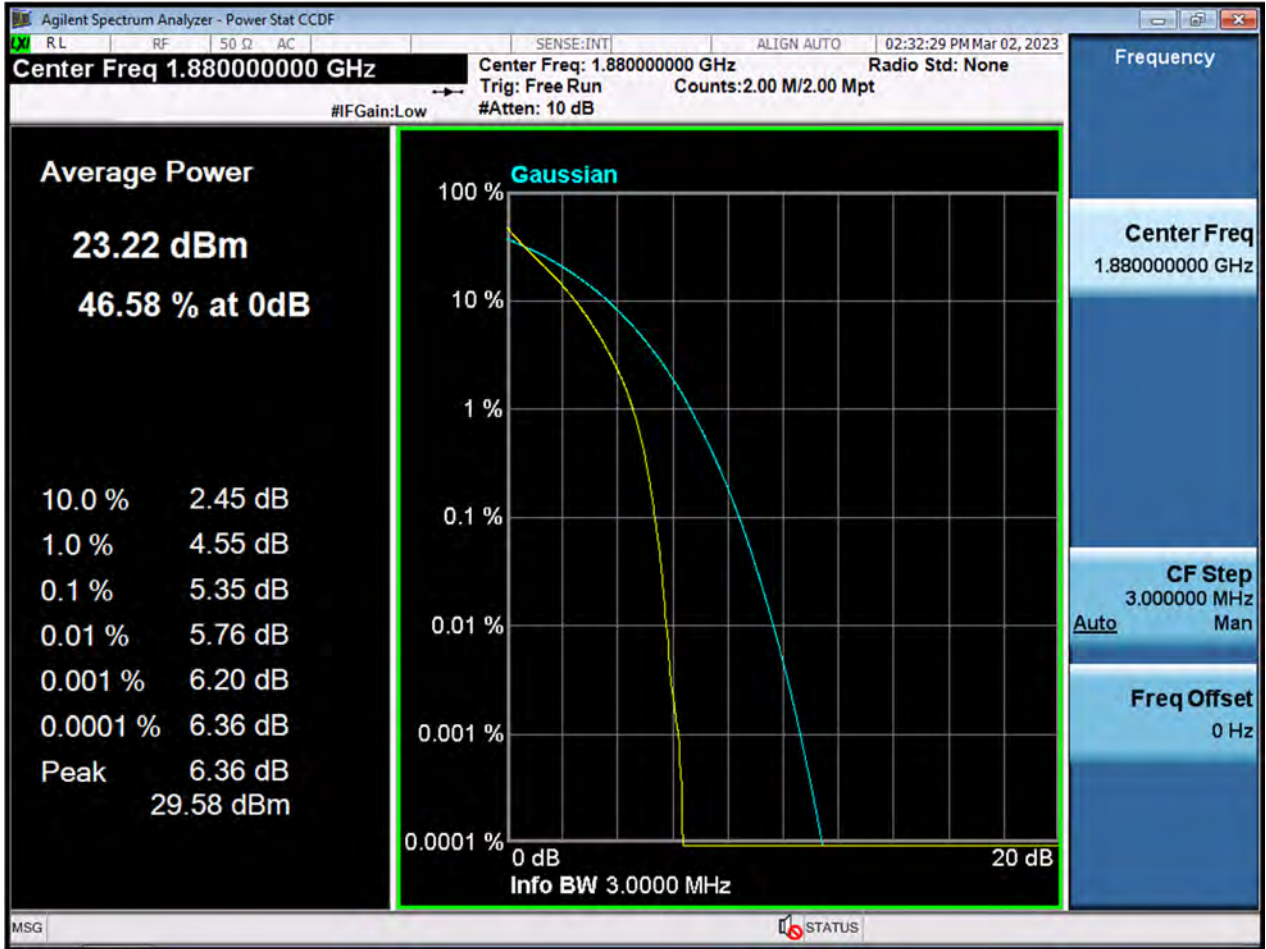




BW3 M_PAR_Middle Channel_16QAM_FullRB

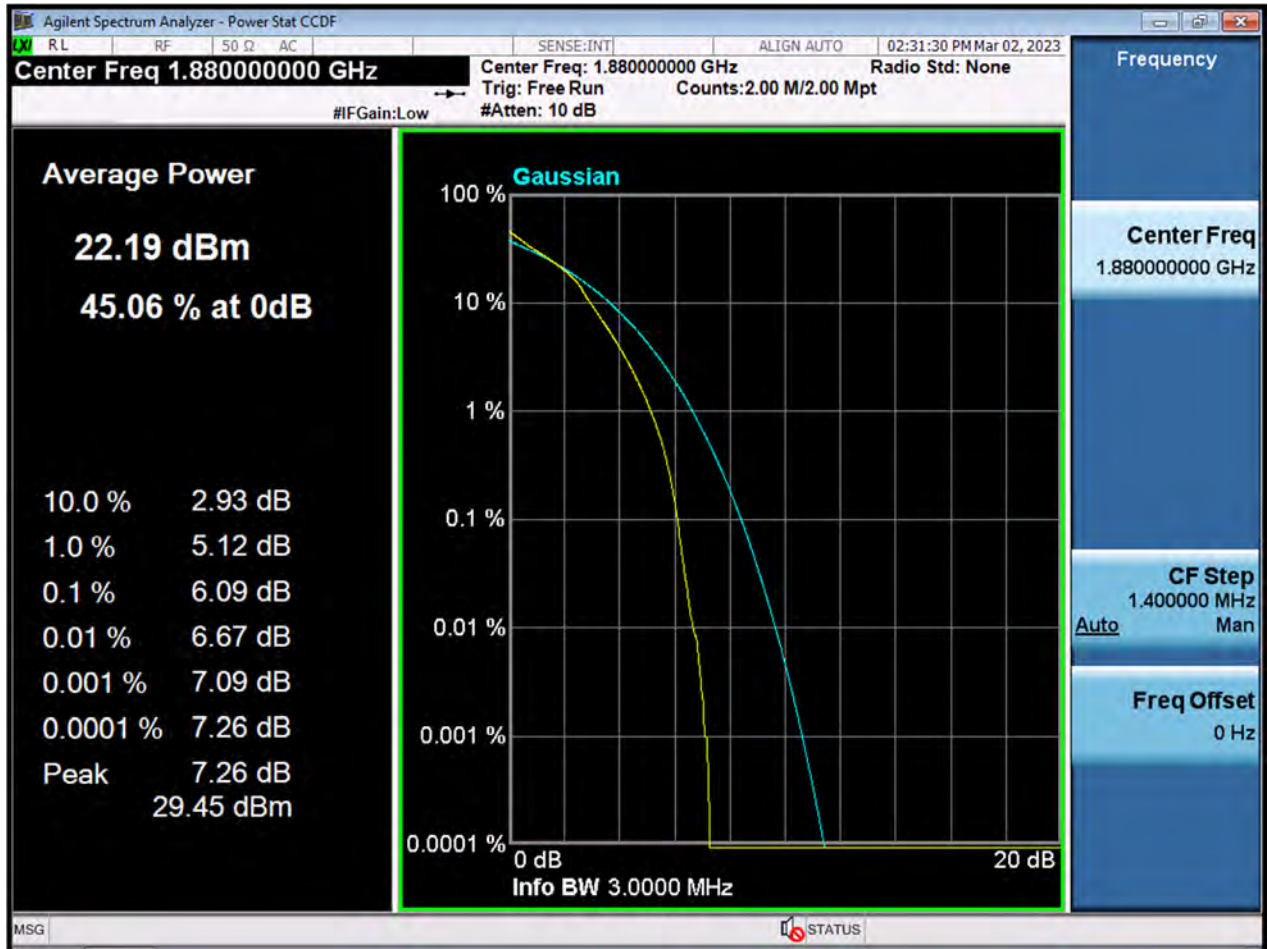


BW3 M_PAR_Middle Channel_64QAM_FullRB

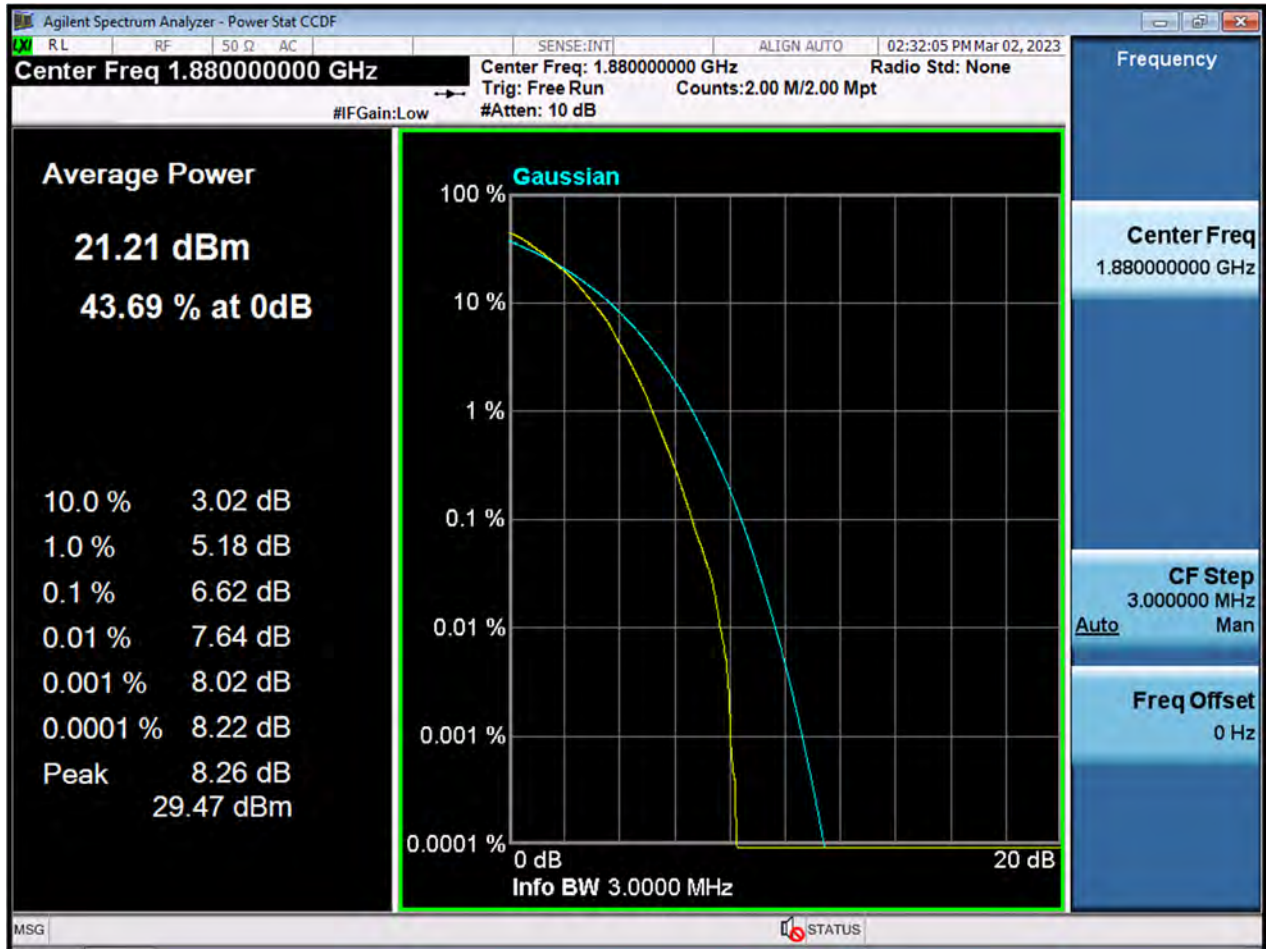




BW3 M_PAR_Middle Channel_256QAM_FullRB

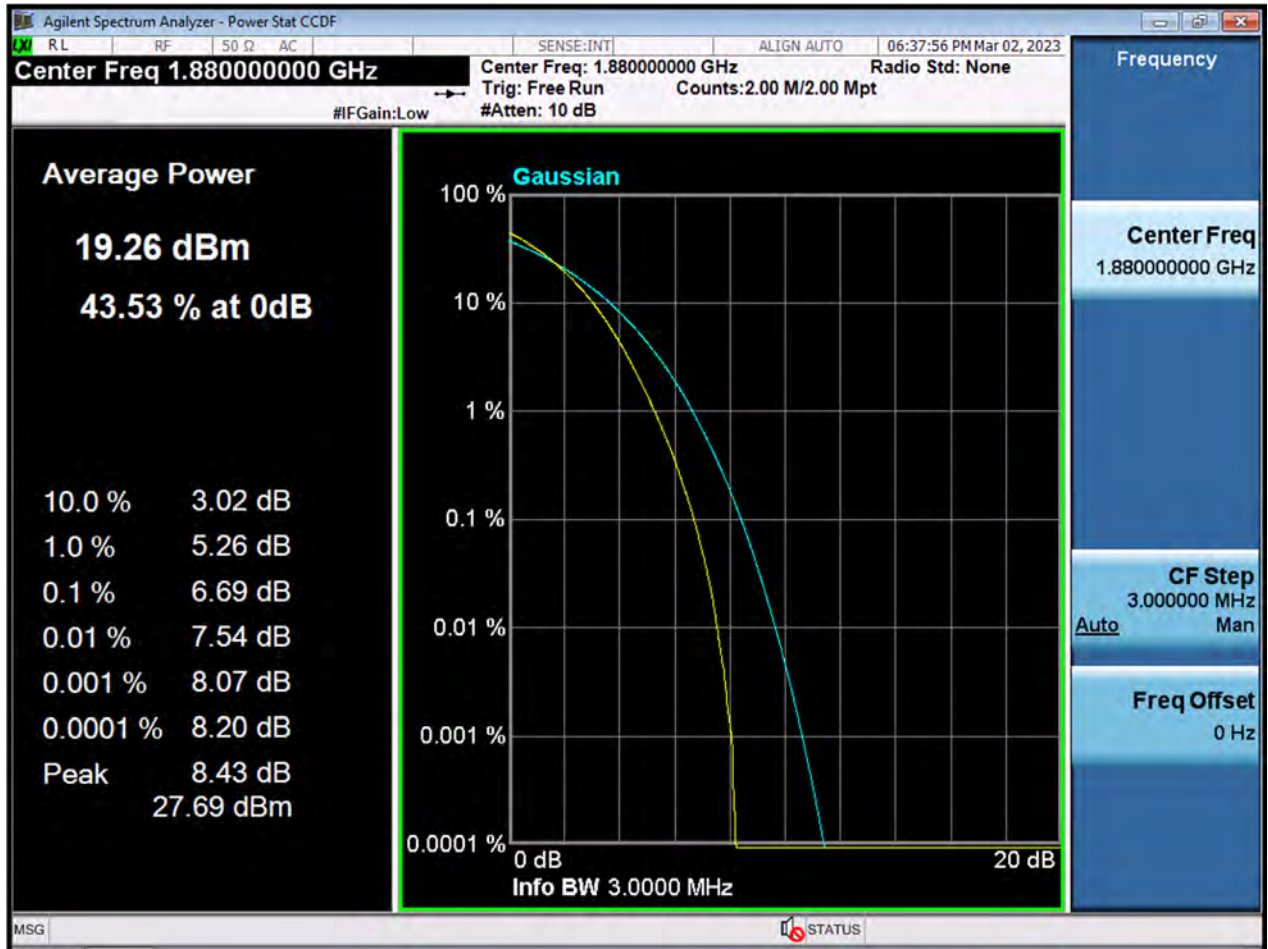



BW5 M_PAR_Middle Channel_QPSK_FullRB

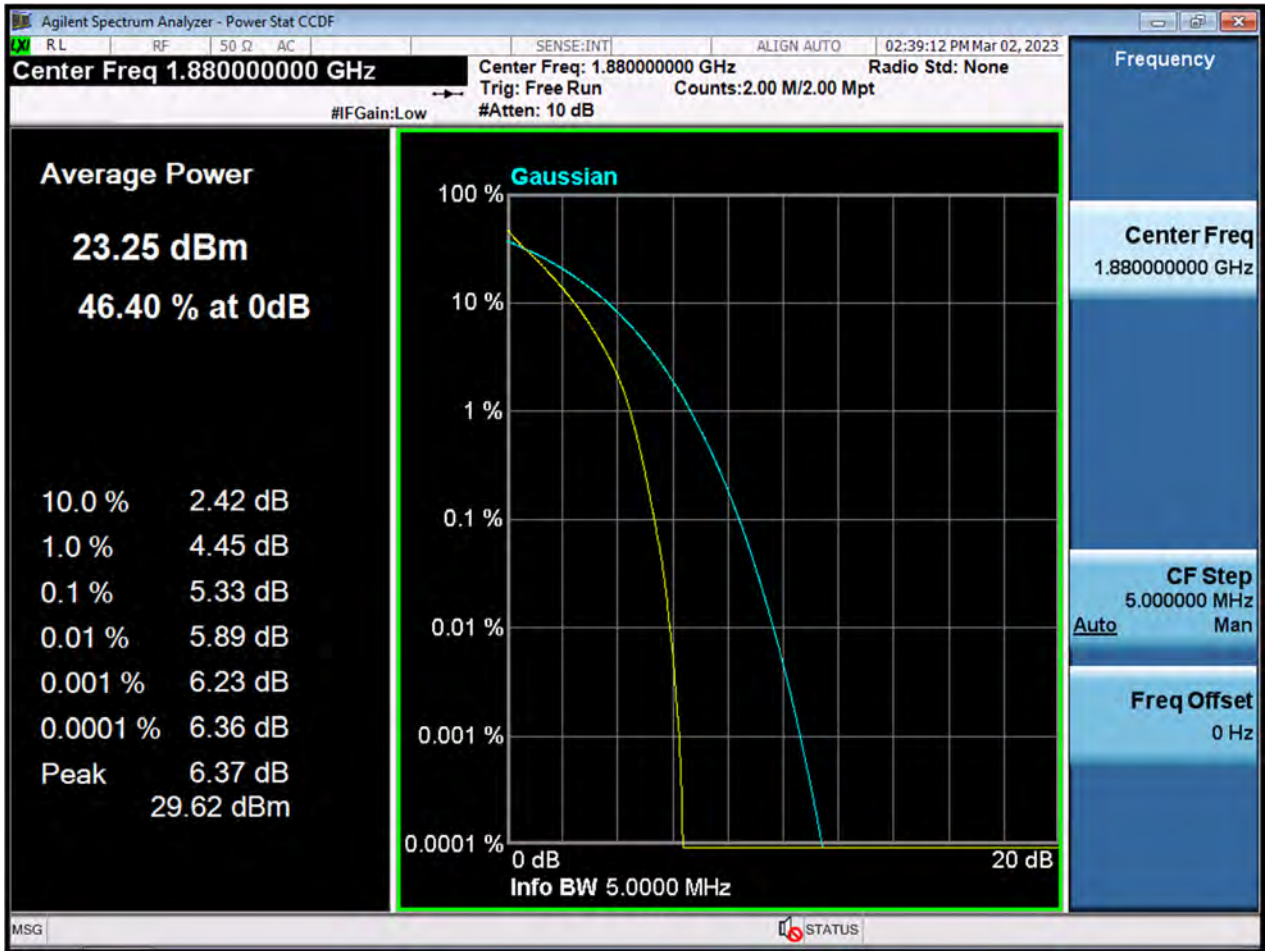




BW5 M_PAR_Middle Channel_16QAM_FullRB




BW5 M_PAR_Middle Channel_64QAM_FullRB

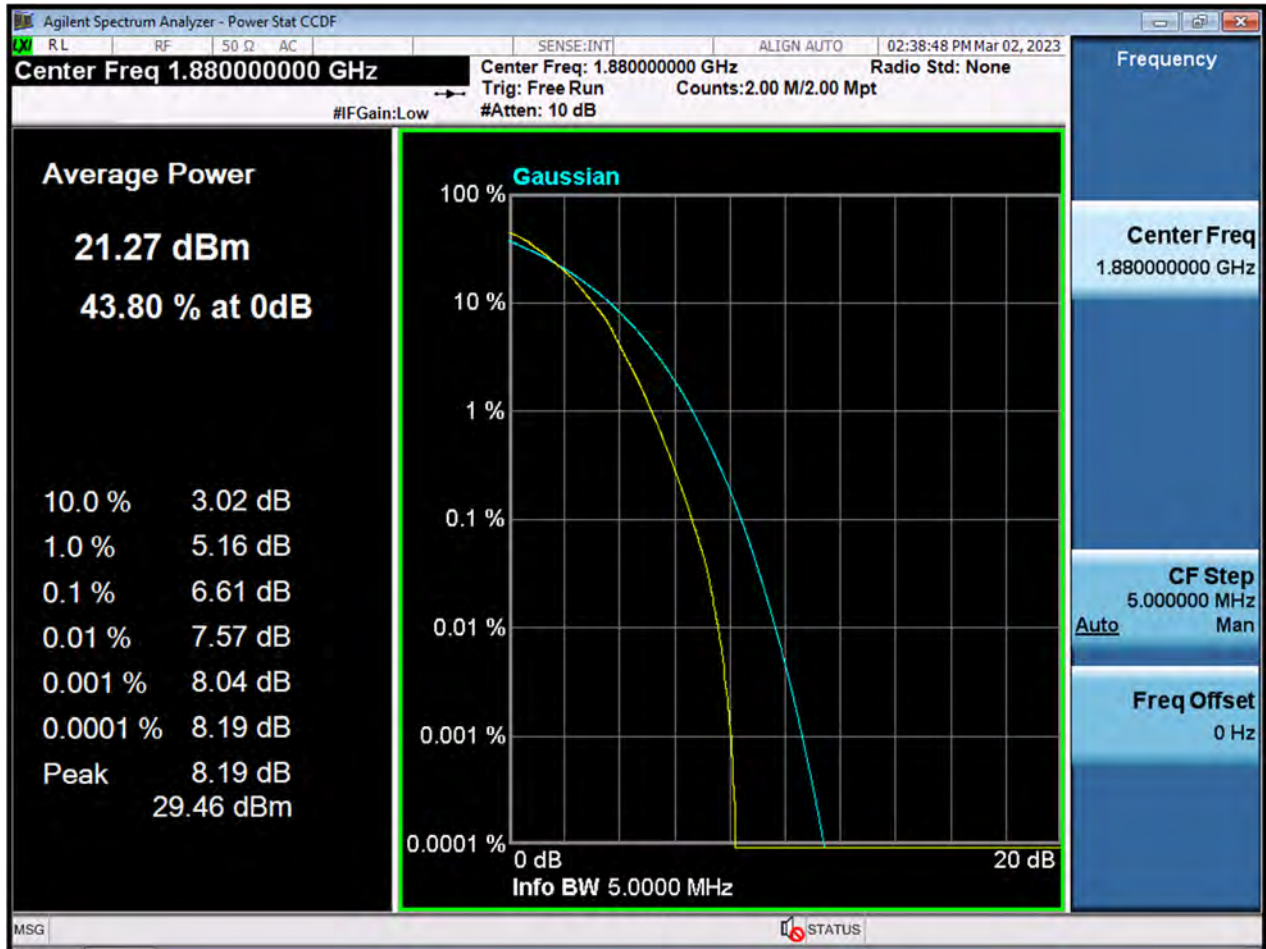




BW5 M_PAR_Middle Channel_256QAM_FullRB

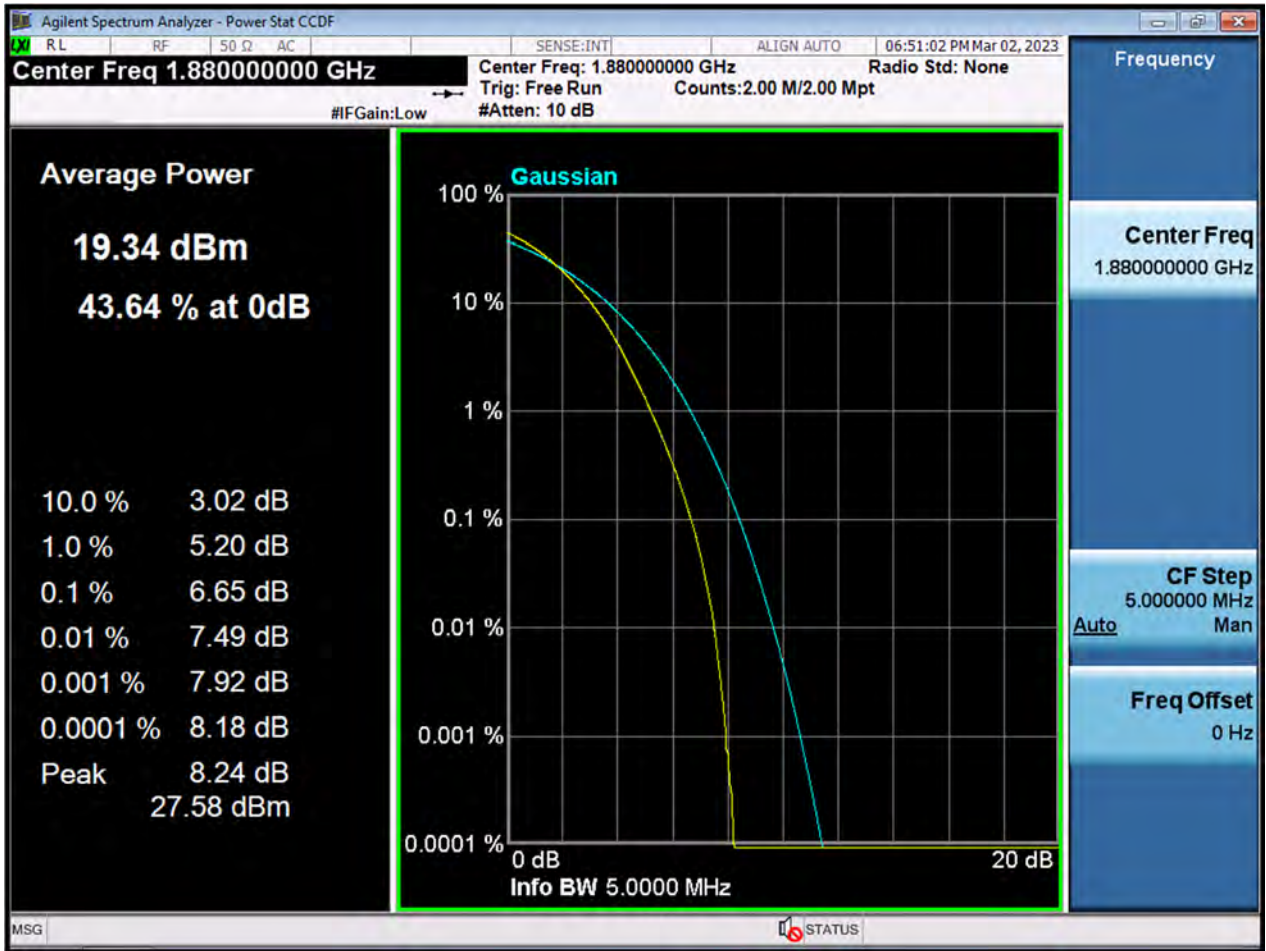




BW10 M_PAR_Middle Channelz_QPSK_FullRB

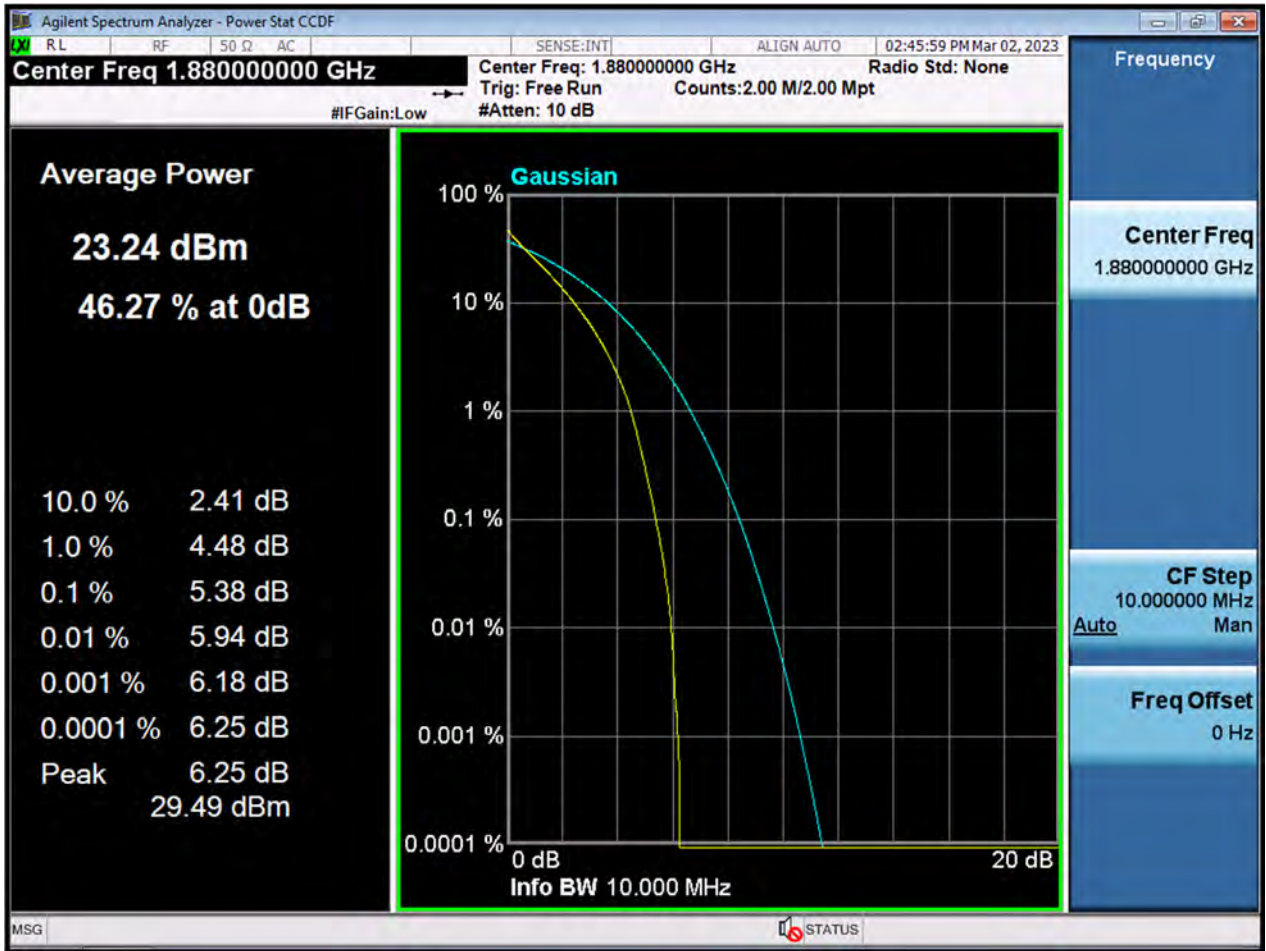



BW10 M_PAR_Middle Channel_16QAM_FullRB

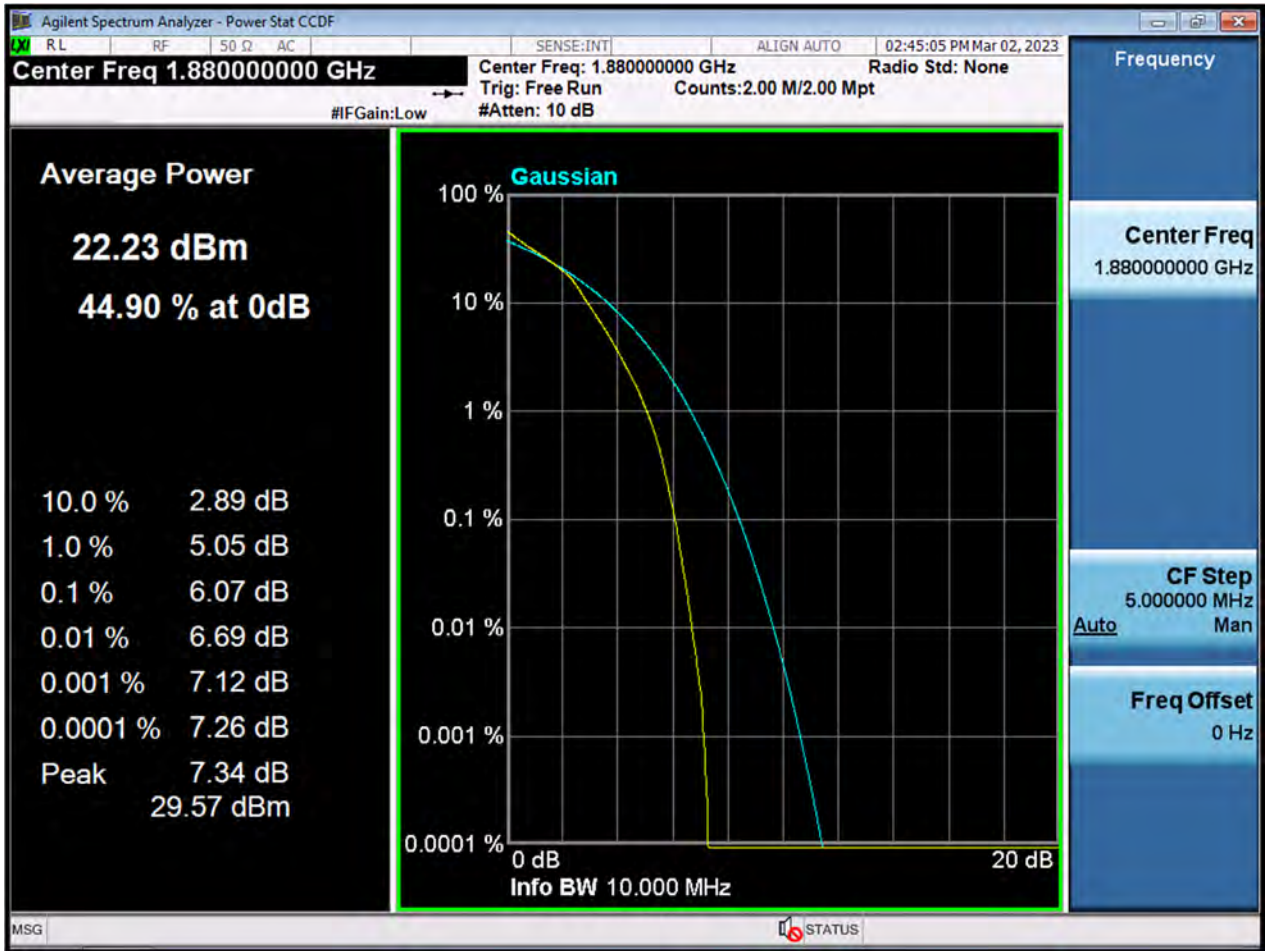




BW10 M_PAR_Middle Channel_64QAM_FullRB






BW10 M_PAR_Middle Channel_256QAM_FullRB

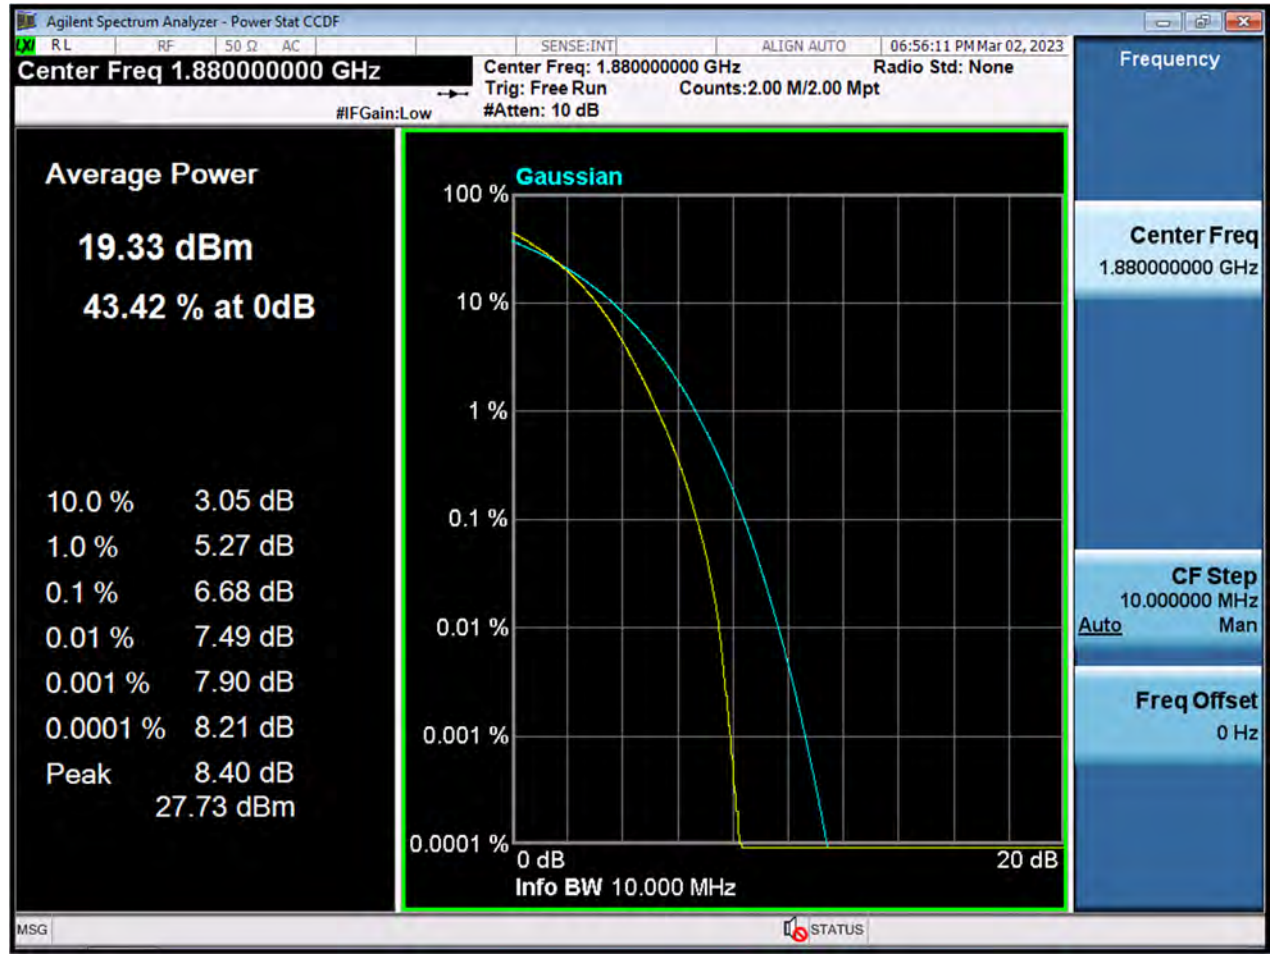




BW15 M_PAR_Middle Channel_QPSK_FullRB

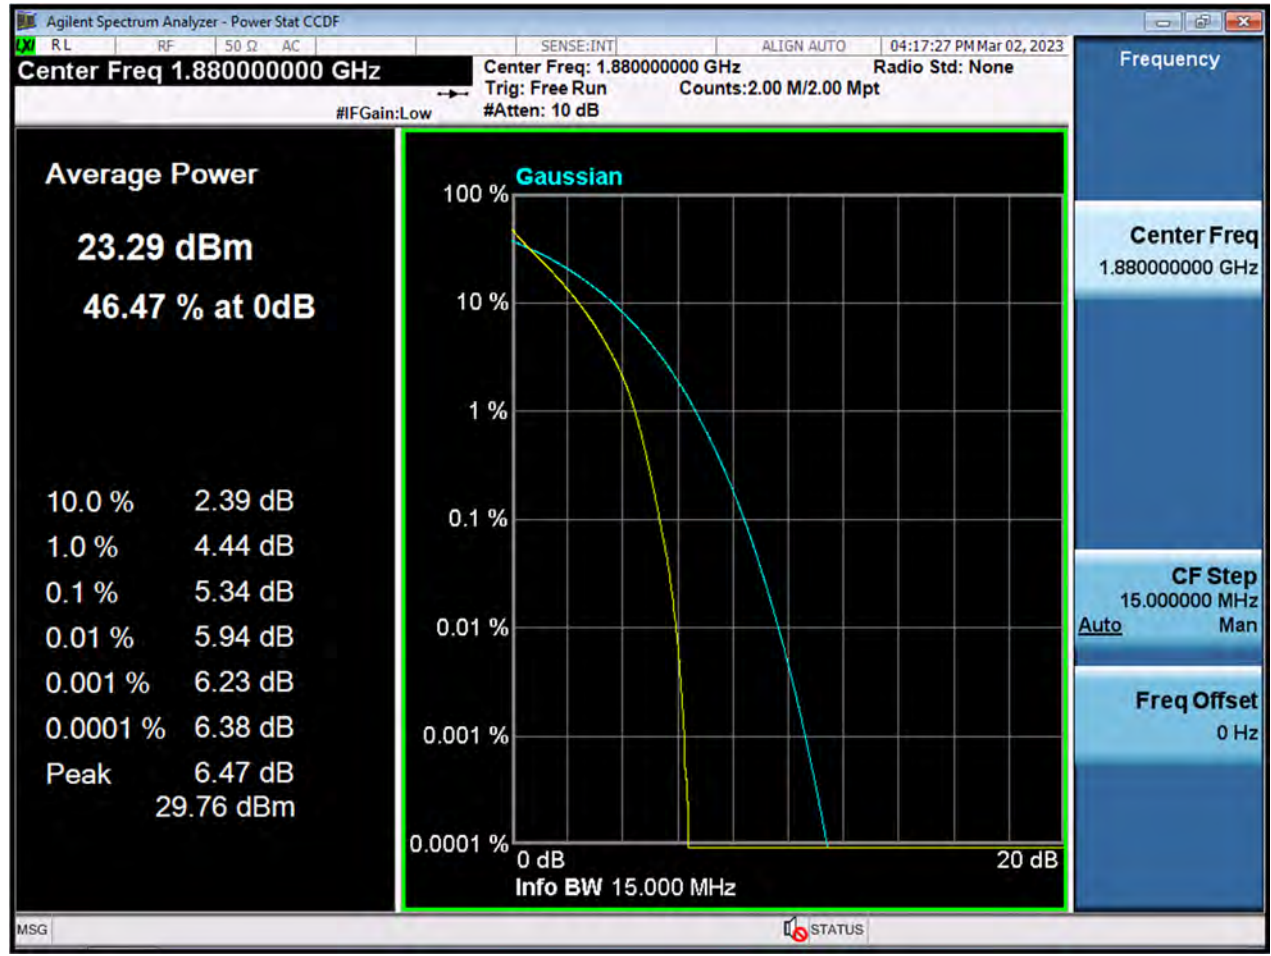




BW15 M_PAR_Middle Channel_16QAM_FullRB

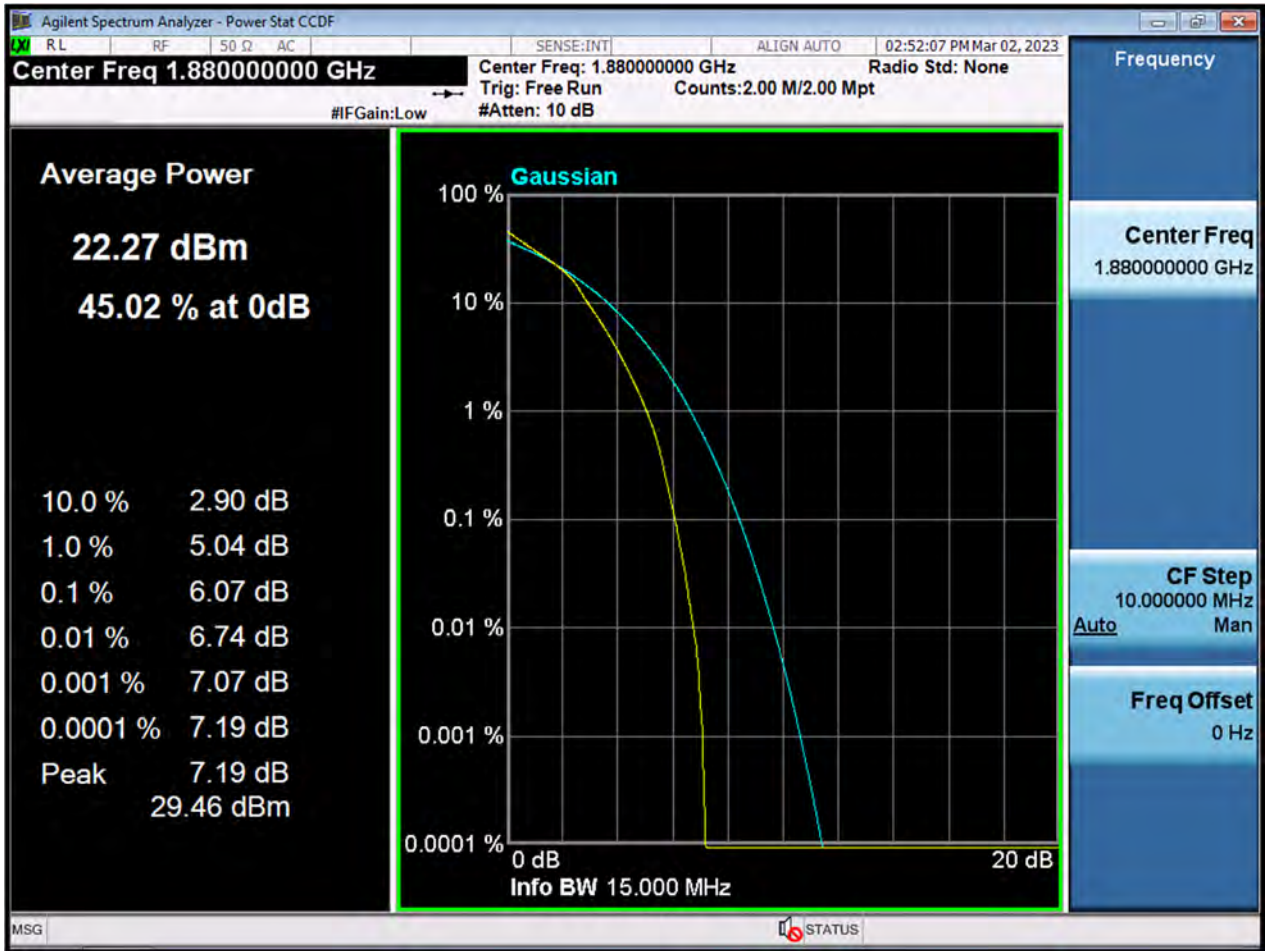




BW15 M_PAR_Middle Channel_64QAM_FullRB

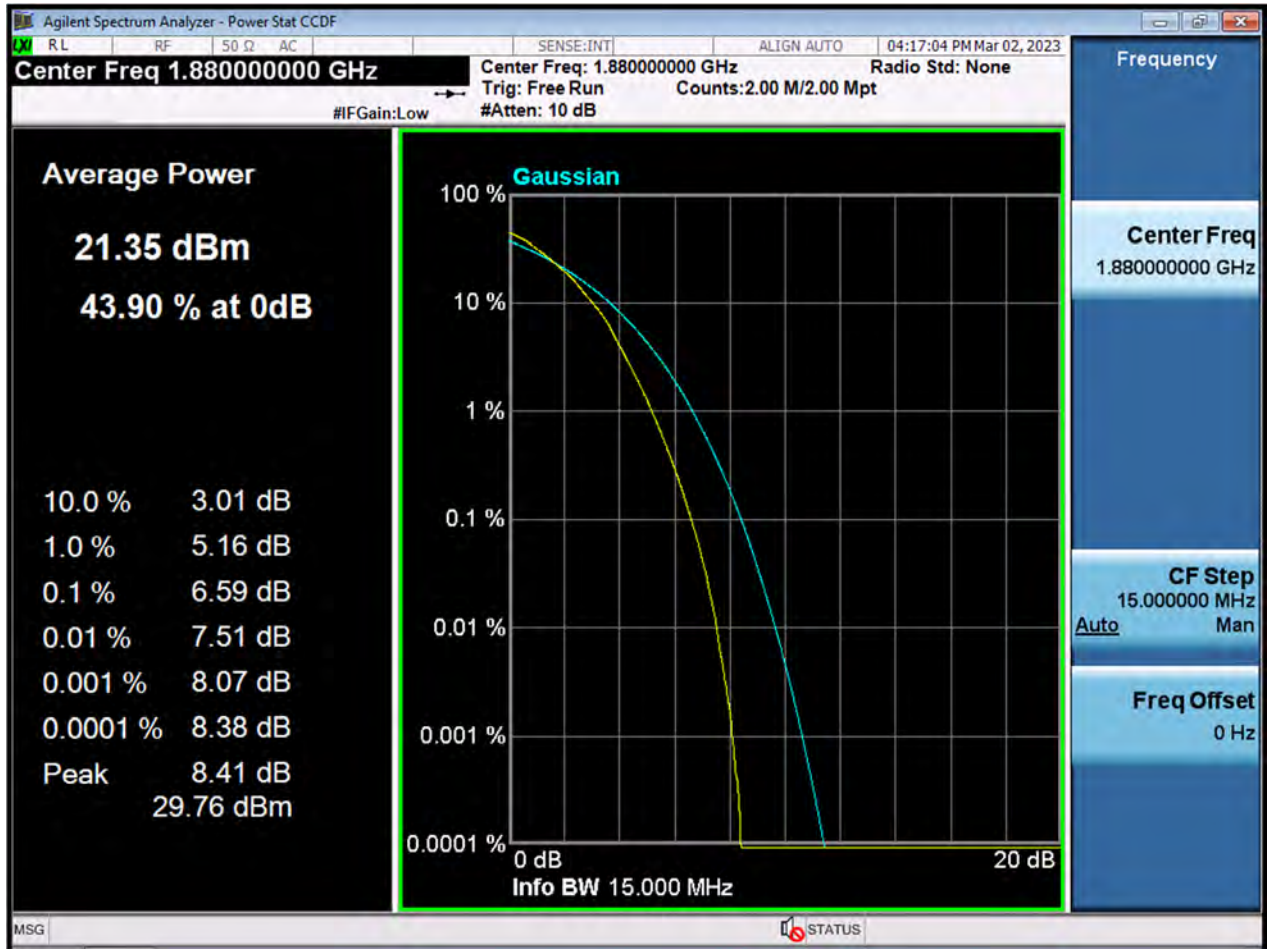




BW15 M_PAR_Middle Channel_256QAM_FullRB

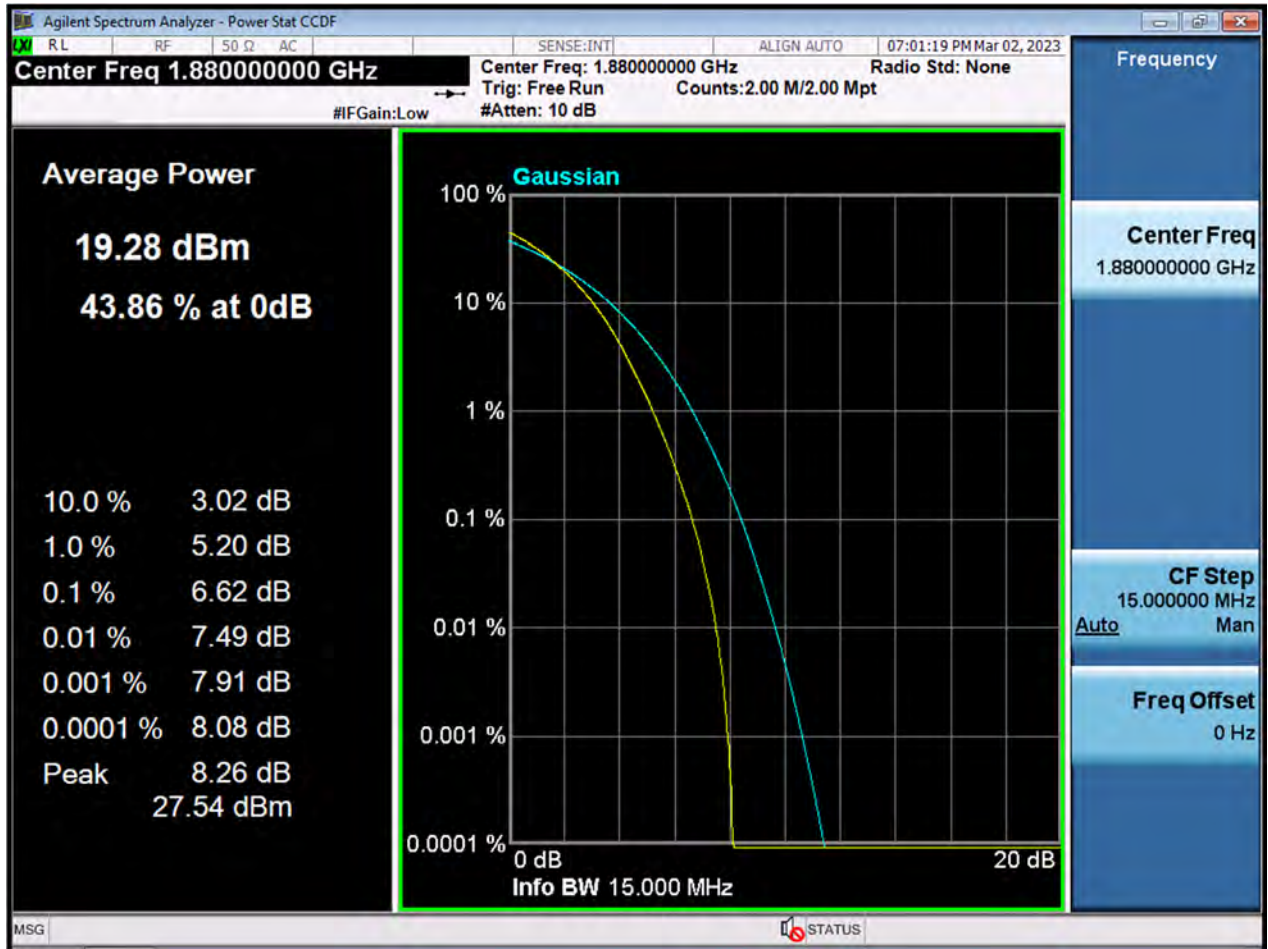




BW20 M_PAR_Middle Channel_QPSK_FullRB

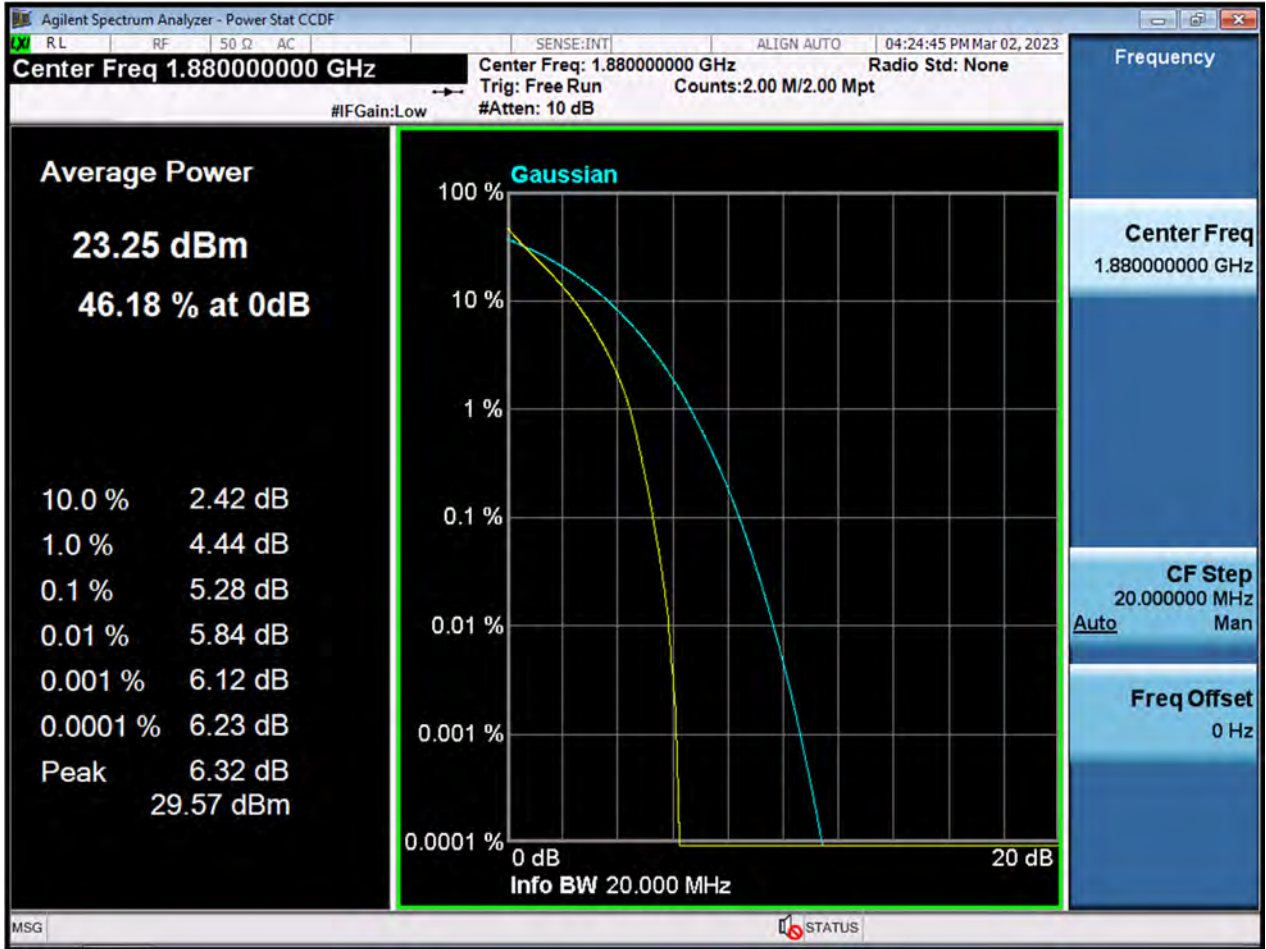




BW20 M_PAR_Middle Channel_16QAM_FullRB

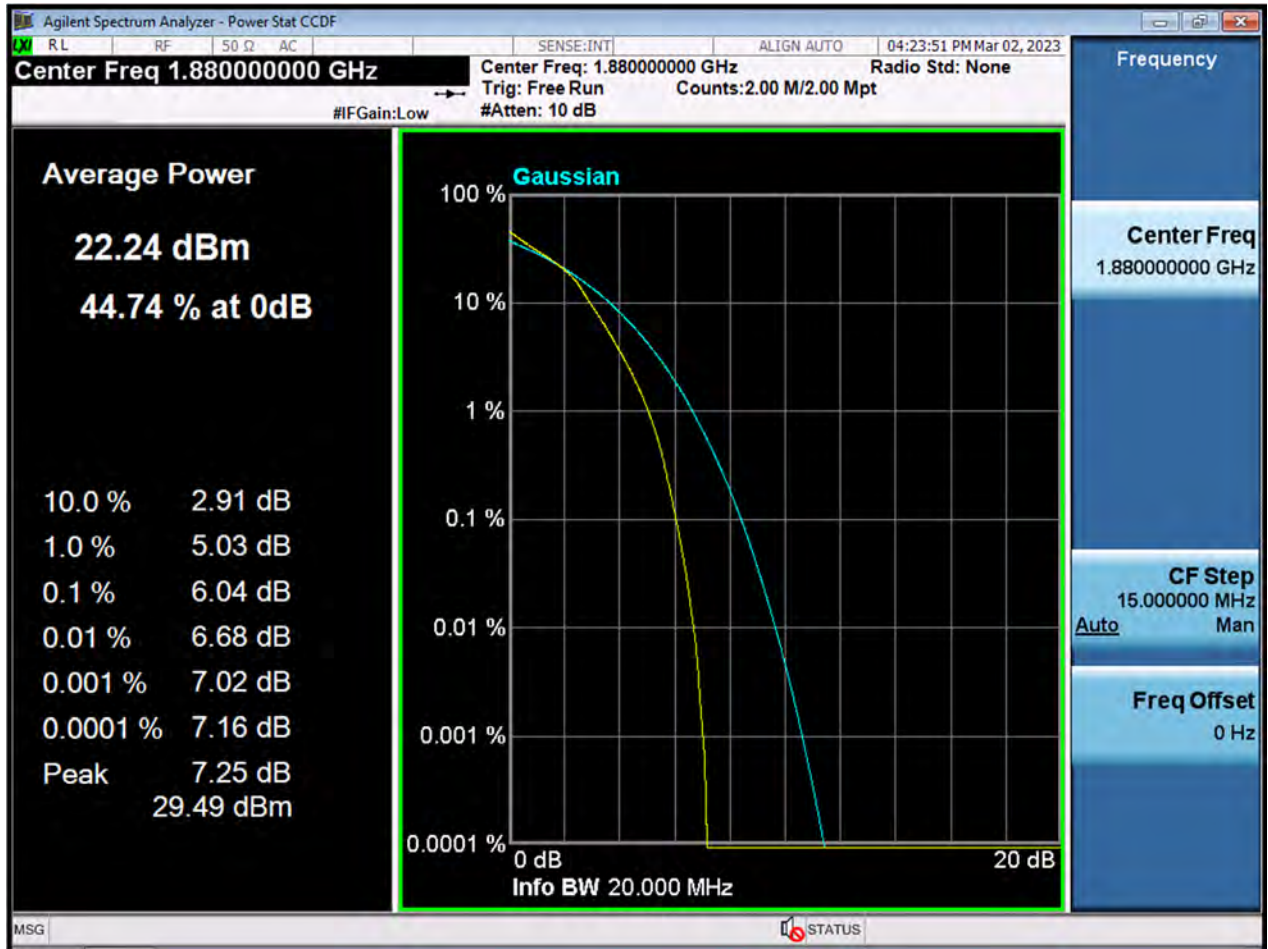




BW20 M_PAR_Middle Channel_64QAM_FullRB

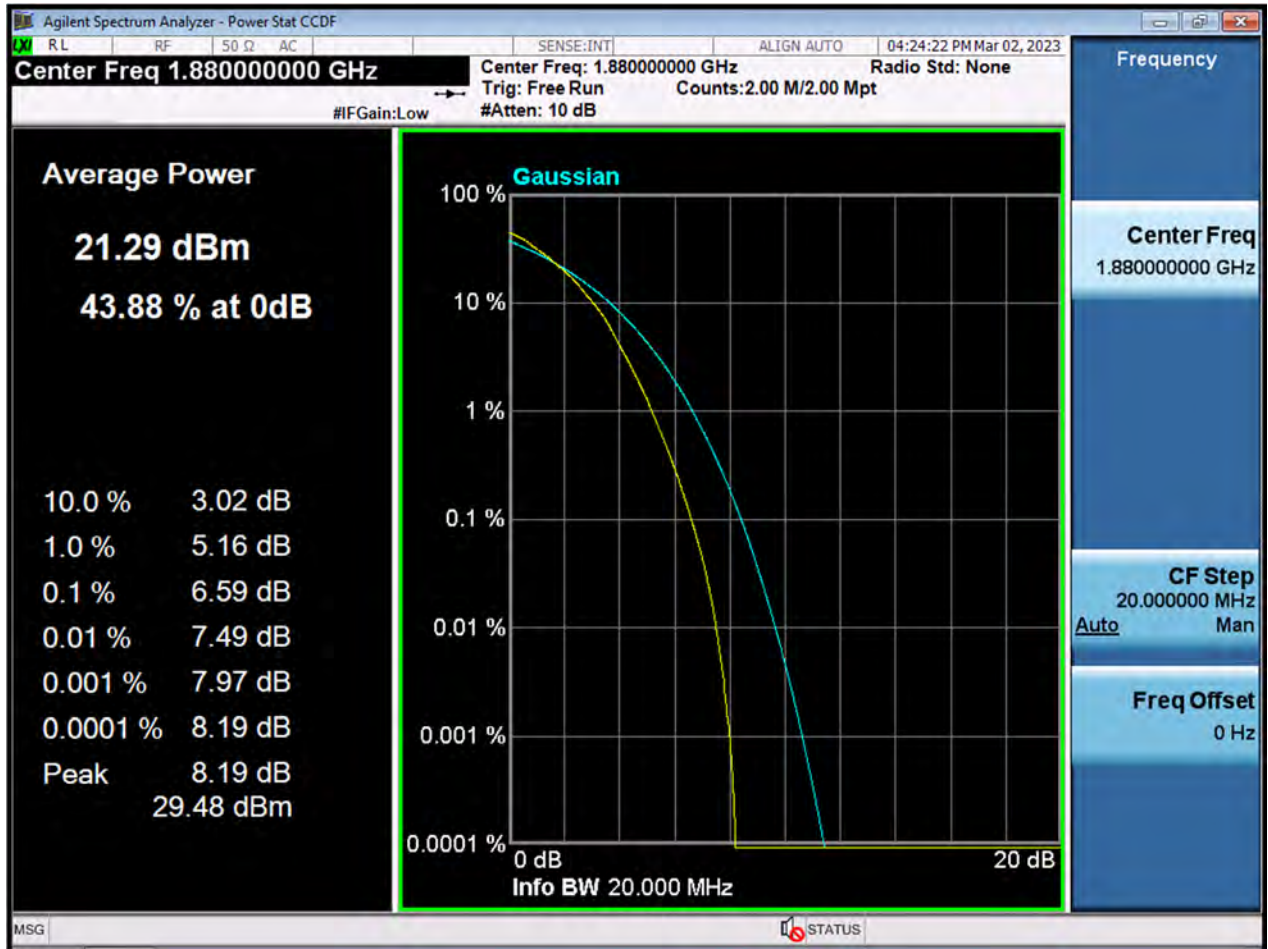




BW20 M_PAR_Middle Channel_256QAM_FullRB

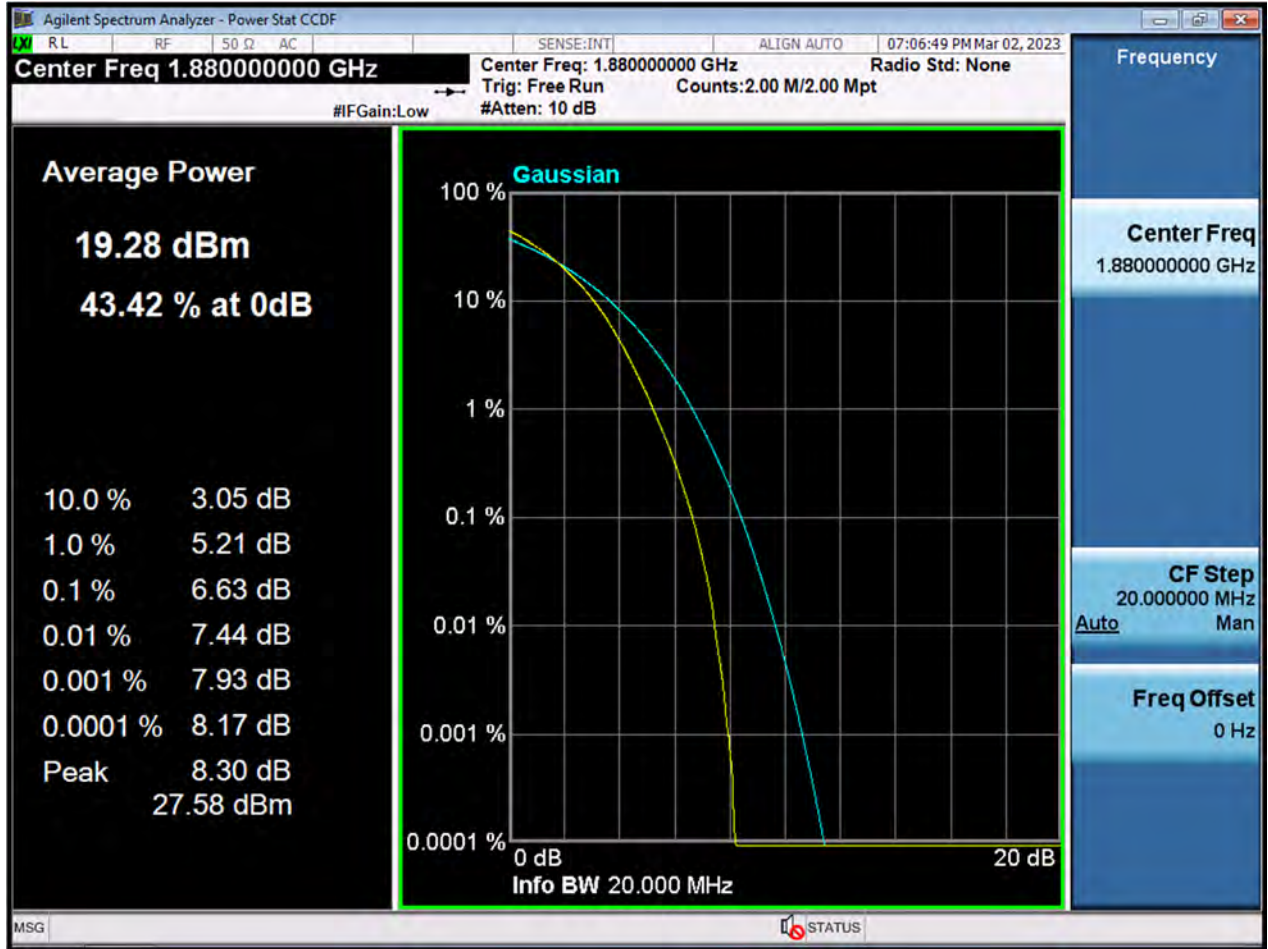





BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

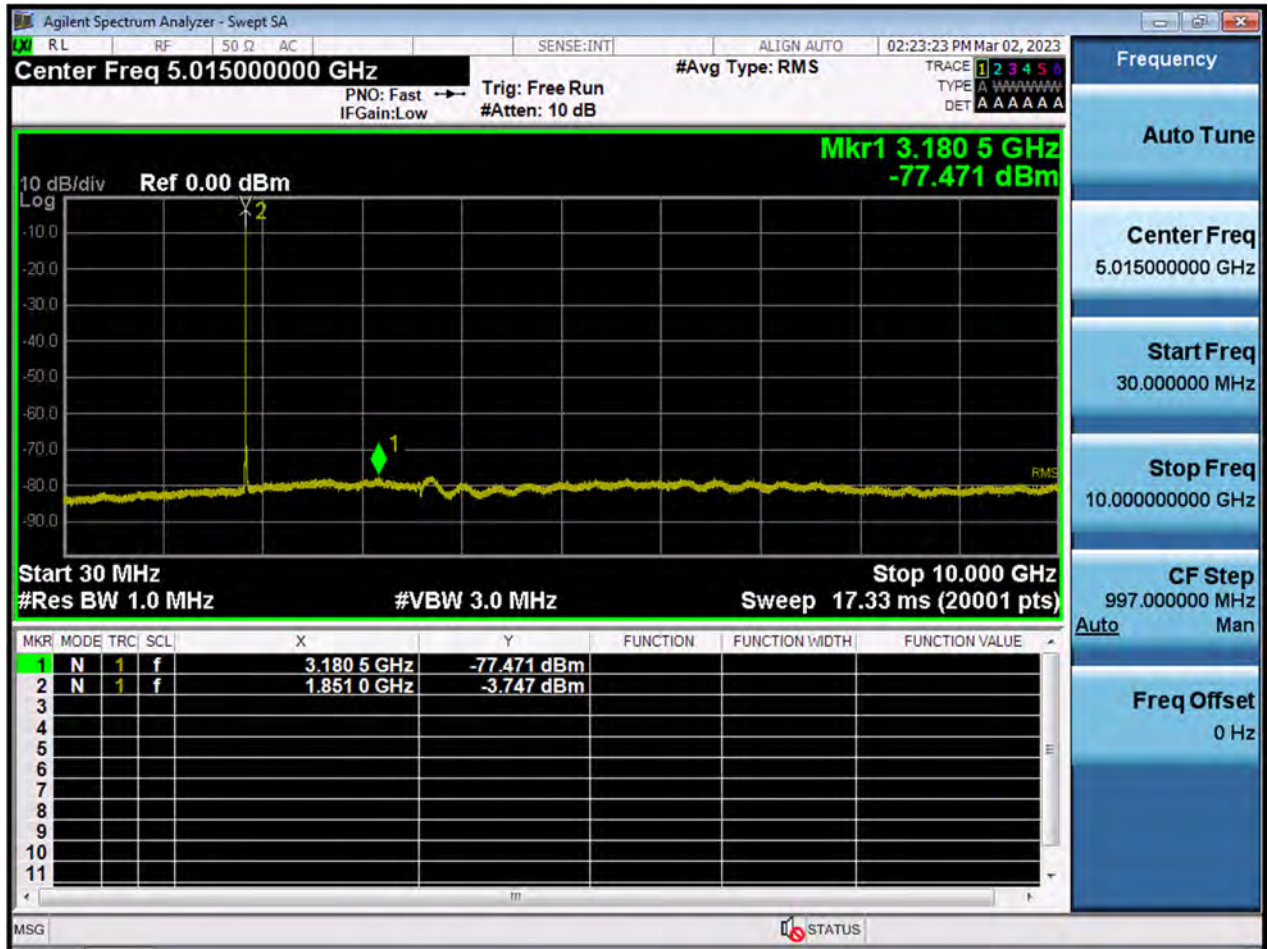

BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

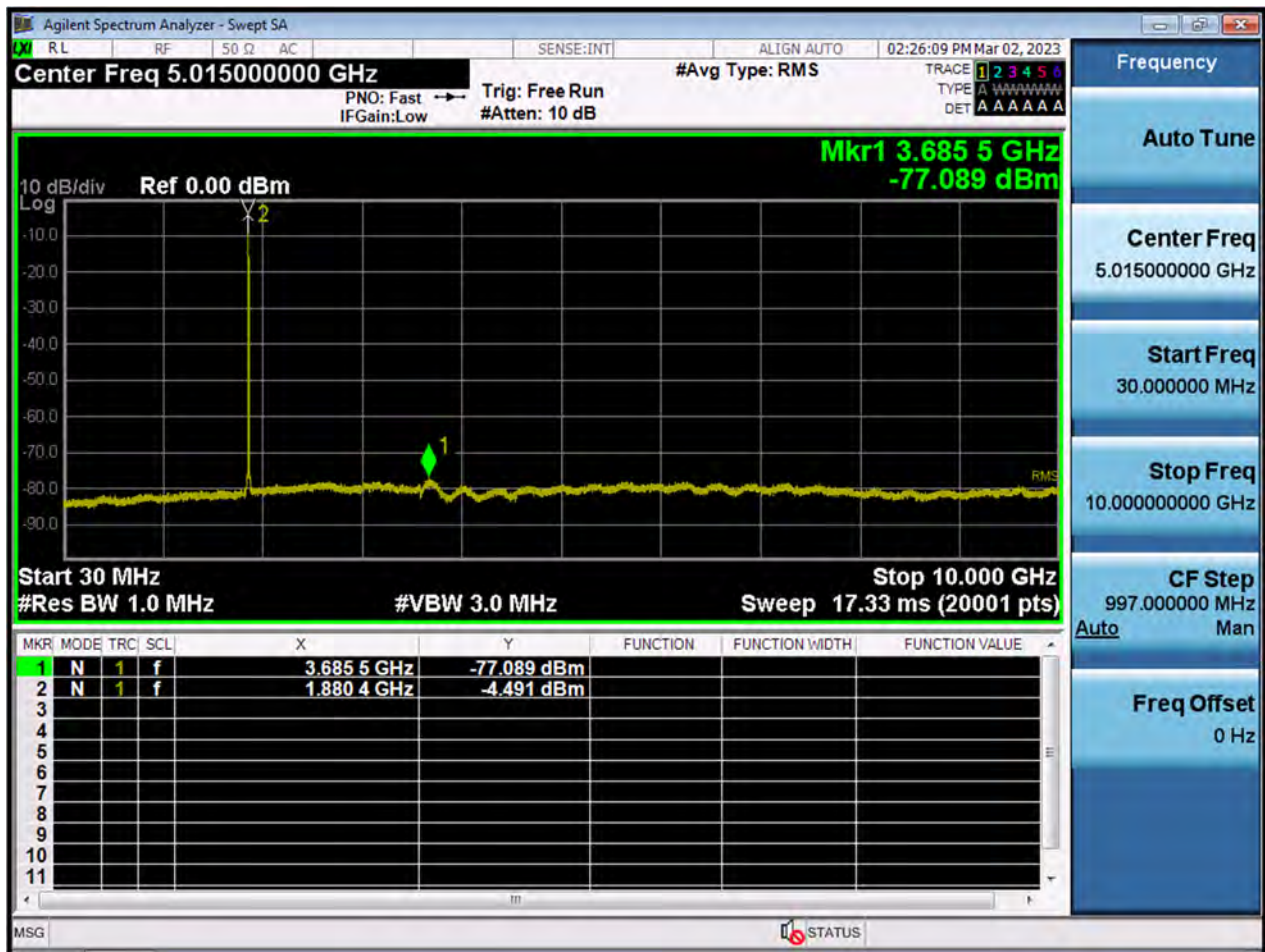


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

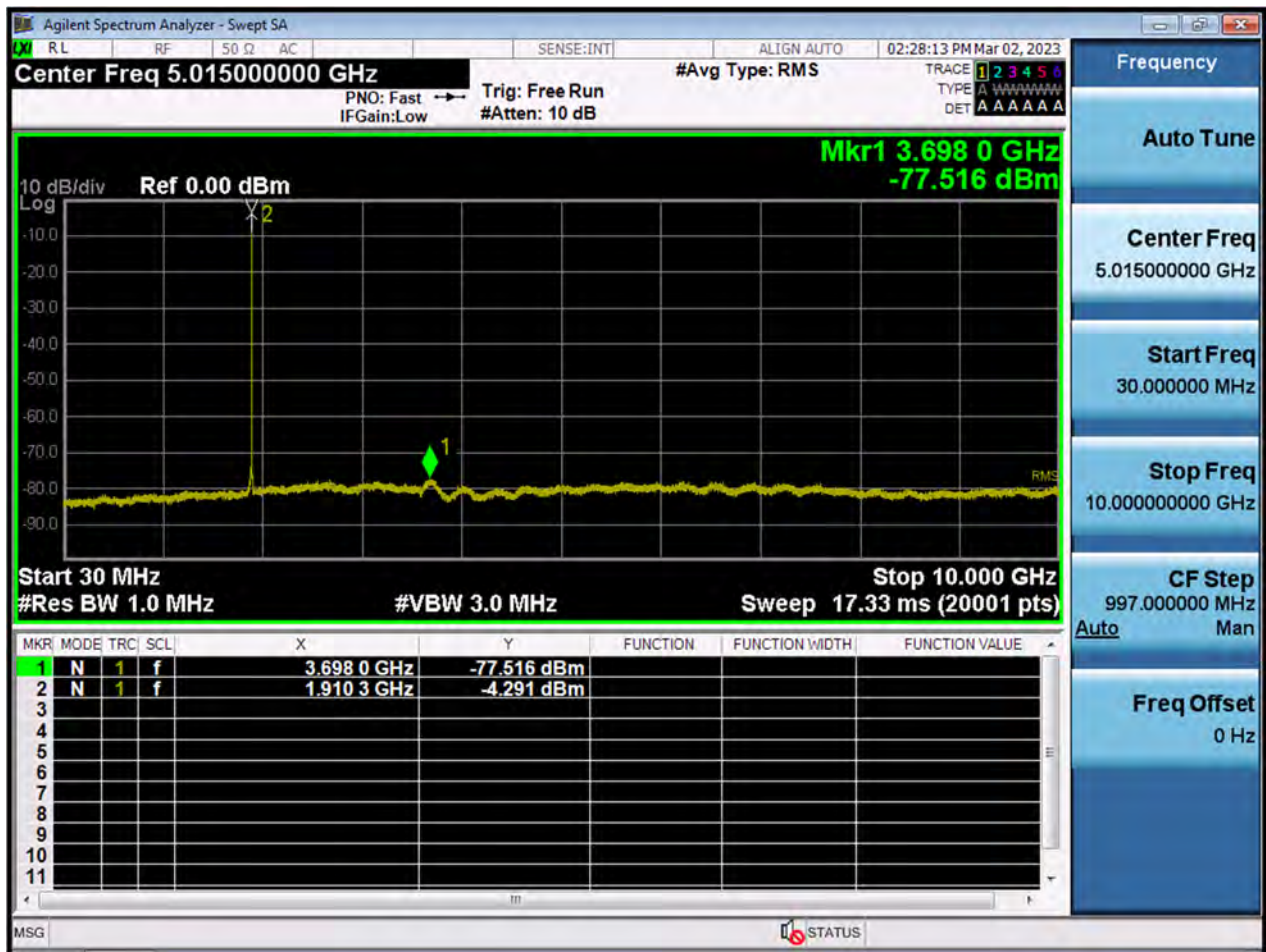



BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

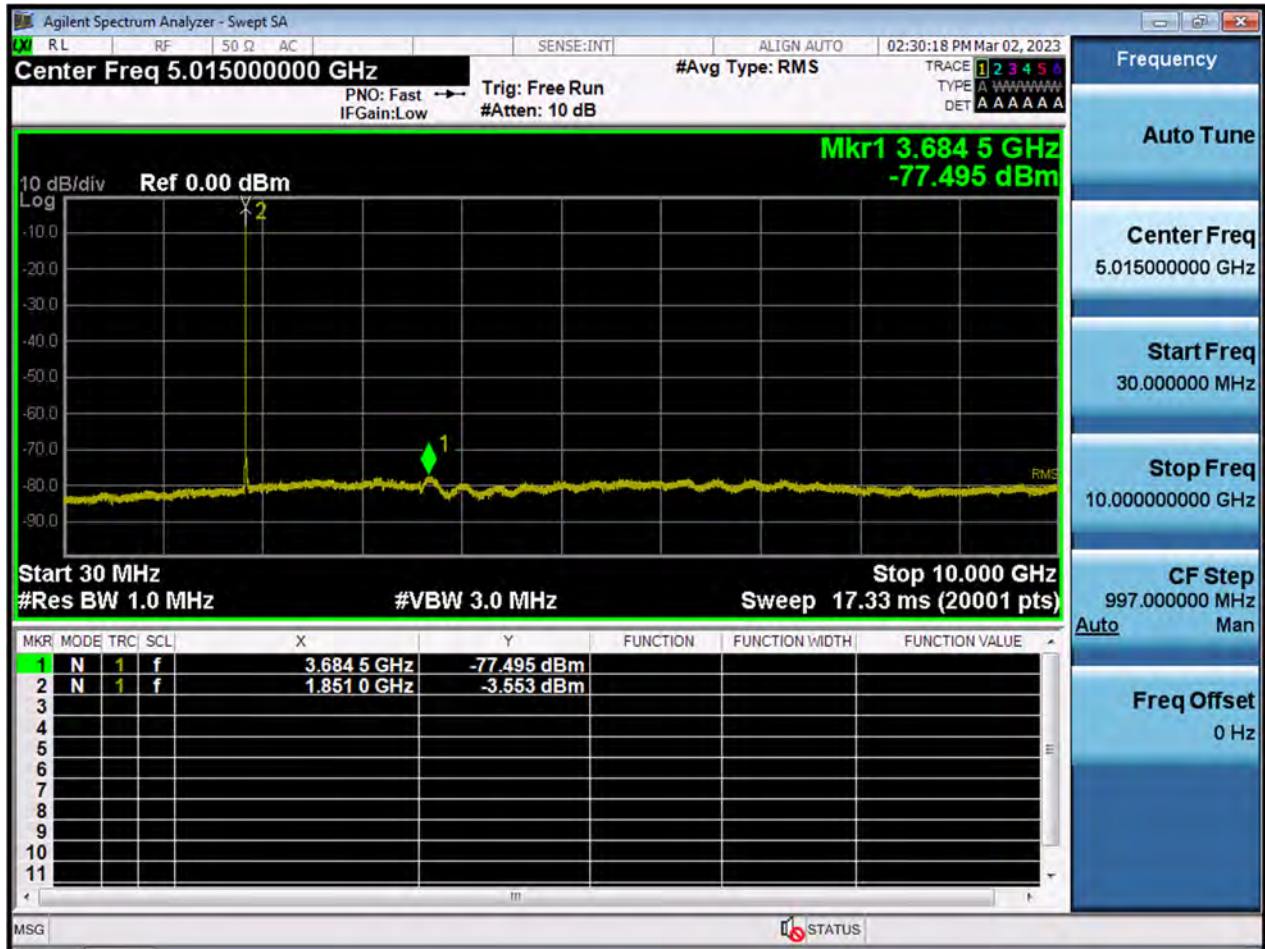



BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

