

# TEST REPORT

FCC LTE Test for TFGMEIBBCD4  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2308-FC006

**DATE OF ISSUE**  
October 5, 2023

**Tested by**  
Jung Ki Lim

**Technical Manager**  
Jong Seok Lee

**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

|                                                                                                                             |                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <h1 style="margin: 0;">TEST<br/>REPORT</h1> <p style="margin: 0; font-weight: normal;">FCC LTE Test for<br/>TFGMEIBBCD4</p> | <p><b>REPORT NO.</b><br/>HCT-RF-2308-FC006</p> <p><b>DATE OF ISSUE</b><br/>October 05, 2023</p> <p><b>Additional Model</b><br/>TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8,<br/>TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC</p> |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Applicant**      **LG Electronics Inc.**  
10, MagokJungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea

|                                |                                    |
|--------------------------------|------------------------------------|
| <b>Eut Type<br/>Model Name</b> | GM Onstar Gen12 ROW<br>TFGMEIBBCD4 |
| <b>FCC ID</b>                  | BEJTFGMEIBBCD4                     |
| <b>FCC Classification:</b>     | PCS Licensed Transmitter (PCB)     |
| <b>FCC Rule Part(s):</b>       | § 27, § 2                          |

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue    | Description     |
|--------------|------------------|-----------------|
| 0            | October 05, 2023 | Initial Release |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)

## CONTENTS

|                                                            |     |
|------------------------------------------------------------|-----|
| 1. GENERAL INFORMATION                                     | 5   |
| 1.1. MAXIMUM OUTPUT POWER                                  | 6   |
| 2. INTRODUCTION                                            | 7   |
| 2.1. DESCRIPTION OF EUT                                    | 7   |
| 2.2. MEASURING INSTRUMENT CALIBRATION                      | 7   |
| 2.3. TEST FACILITY                                         | 7   |
| 3. DESCRIPTION OF TESTS                                    | 8   |
| 3.1 TEST PROCEDURE                                         | 8   |
| 3.2 CONDUCTED OUTPUT POWER                                 | 9   |
| 3.3 RADIATED TEST                                          | 10  |
| 3.3.1 RADIATED POWER                                       | 11  |
| 3.3.2 RADIATED SPURIOUS EMISSIONS                          | 12  |
| 3.4 PEAK- TO- AVERAGE RATIO                                | 14  |
| 3.5 OCCUPIED BANDWIDTH.                                    | 16  |
| 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL    | 17  |
| 3.7 CHANNEL EDGE                                           | 18  |
| 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 20  |
| 3.9 WORST CASE(RADIATED TEST)                              | 21  |
| 3.10 WORST CASE(CONDUCTED TEST)                            | 22  |
| 4. LIST OF TEST EQUIPMENT                                  | 23  |
| 5. MEASUREMENT UNCERTAINTY                                 | 25  |
| 6. SUMMARY OF TEST RESULTS                                 | 26  |
| 7. EMISSION DESIGNATOR                                     | 27  |
| 8. TEST DATA                                               | 28  |
| 8.1 Conducted Output Power                                 | 28  |
| 8.2 EQUIVALENT ISOTROPIC RADIATED POWER                    | 32  |
| 8.2.1 External Antenna                                     | 32  |
| 8.2.2 Internal Antenna                                     | 34  |
| 8.3 RADIATED SPURIOUS EMISSIONS                            | 36  |
| 8.3.1 External Antenna                                     | 36  |
| 8.3.2 Internal Antenna                                     | 40  |
| 8.3.3 Inter Band ULCA                                      | 44  |
| 8.4 PEAK-TO-AVERAGE RATIO                                  | 45  |
| 8.5 OCCUPIED BANDWIDTH                                     | 46  |
| 8.6 CONDUCTED SPURIOUS EMISSIONS                           | 47  |
| 8.7 CHANNEL EDGE                                           | 48  |
| 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 49  |
| 9. TEST PLOTS                                              | 61  |
| 10. ANNEX A_ TEST SETUP PHOTO                              | 142 |

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

|                              |                                                                                                                              |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Applicant Name:              | LG Electronics Inc.                                                                                                          |
| Address:                     | 10, Magok Jungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea                                                             |
| FCC ID:                      | BEJTFGMEIBBCD4                                                                                                               |
| Application Type:            | Certification                                                                                                                |
| FCC Classification:          | PCS Licensed Transmitter (PCB)                                                                                               |
| FCC Rule Part(s):            | § 27, § 2                                                                                                                    |
| EUT Type:                    | GM Onstar Gen12 ROW                                                                                                          |
| Model(s):                    | TFGMEIBBCD4                                                                                                                  |
| Additional Model:            | TFGMEIBBCD5,TFGMEIBBCD6,TFGMEIBBCD7,TFGMEIBBCD8, TFGMEIBBCD9,<br>TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC                       |
| Tx Frequency:                | 2502.5 – 2567.5 : 5 MHz<br>2505.0 – 2565.0 : 10 MHz<br>2507.5 – 2562.5 : 15 MHz<br>2510.0 – 2560.0 : 20 MHz                  |
| Date(s) of Tests:            | February 27, 2023 ~ October 05, 2023                                                                                         |
| Serial number:               | Radiated<br>- External Antenna : EBR36018942_#30<br>- Internal Antenna : EBR36018942K_#14<br><br>Conducted : EBR36018829_#75 |
| External Antenna Information | ANT5 : 86531607<br>ANT4 : 86575530<br>DUT4 : 85608774                                                                        |

### 1.1. MAXIMUM OUTPUT POWER

| Mode (MHz)        | Tx Frequency (MHz) | Emission Designator | Modulation | EIRP External Antenna |                  | EIRP Internal Antenna |                  |
|-------------------|--------------------|---------------------|------------|-----------------------|------------------|-----------------------|------------------|
|                   |                    |                     |            | Max. Power (W)        | Max. Power (dBm) | Max. Power (W)        | Max. Power (dBm) |
| LTE - Band 7 (5)  | 2502.5 - 2567.5    | 4M50G7D             | QPSK       | 0.304                 | 24.83            | 0.914                 | 29.61            |
|                   |                    | 4M52W7D             | 16QAM      | 0.255                 | 24.06            | 0.783                 | 28.94            |
|                   |                    | 4M51W7D             | 64QAM      | 0.171                 | 22.33            | 0.555                 | 27.44            |
|                   |                    | 4M50W7D             | 256QAM     | 0.116                 | 20.63            | 0.307                 | 24.87            |
| LTE - Band 7 (10) | 2505.0 - 2565.0    | 8M96G7D             | QPSK       | 0.294                 | 24.69            | 0.902                 | 29.55            |
|                   |                    | 8M99W7D             | 16QAM      | 0.248                 | 23.95            | 0.800                 | 29.03            |
|                   |                    | 8M96W7D             | 64QAM      | 0.155                 | 21.89            | 0.603                 | 27.80            |
|                   |                    | 8M98W7D             | 256QAM     | 0.106                 | 20.24            | 0.301                 | 24.79            |
| LTE - Band 7 (15) | 2507.5 - 2562.5    | 13M5G7D             | QPSK       | 0.294                 | 24.68            | 0.979                 | 29.91            |
|                   |                    | 13M5W7D             | 16QAM      | 0.245                 | 23.89            | 0.869                 | 29.39            |
|                   |                    | 13M5W7D             | 64QAM      | 0.151                 | 21.78            | 0.664                 | 28.22            |
|                   |                    | 13M5W7D             | 256QAM     | 0.109                 | 20.38            | 0.328                 | 25.16            |
| LTE - Band 7 (20) | 2510.0 - 2560.0    | 17M9G7D             | QPSK       | 0.290                 | 24.63            | 0.920                 | 29.64            |
|                   |                    | 17M9W7D             | 16QAM      | 0.246                 | 23.91            | 0.815                 | 29.11            |
|                   |                    | 17M9W7D             | 64QAM      | 0.154                 | 21.87            | 0.619                 | 27.92            |
|                   |                    | 17M9W7D             | 256QAM     | 0.114                 | 20.56            | 0.307                 | 24.87            |



## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a GM Onstar Gen12 ROW with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.


### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

| Test Description                                                | Test Procedure Used                                                                   |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Occupied Bandwidth                                              | - KDB 971168 D01 v03r01 – Section 4.3<br>- ANSI C63.26-2015 – Section 5.4.4           |
| Band Edge                                                       | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Spurious and Harmonic Emissions at Antenna Terminal             | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Conducted Output Power                                          | - KDB 971168 D01 v03r01 – Section 5.2                                                 |
| Peak- to- Average Ratio                                         | - KDB 971168 D01 v03r01 – Section 5.7<br>- ANSI C63.26-2015 – Section 5.2.3.4         |
| Frequency stability                                             | - ANSI C63.26-2015 – Section 5.6                                                      |
| Effective Radiated Power/<br>Effective Isotropic Radiated Power | - KDB 971168 D01 v03r01 – Section 5.2 & 5.8<br>- ANSI/TIA-603-E-2016 – Section 2.2.17 |
| Radiated Spurious and Harmonic Emissions                        | - KDB 971168 D01 v03r01 – Section 6.2<br>- ANSI/TIA-603-E-2016 – Section 2.2.12       |



### 3.2 CONDUCTED OUTPUT POWER

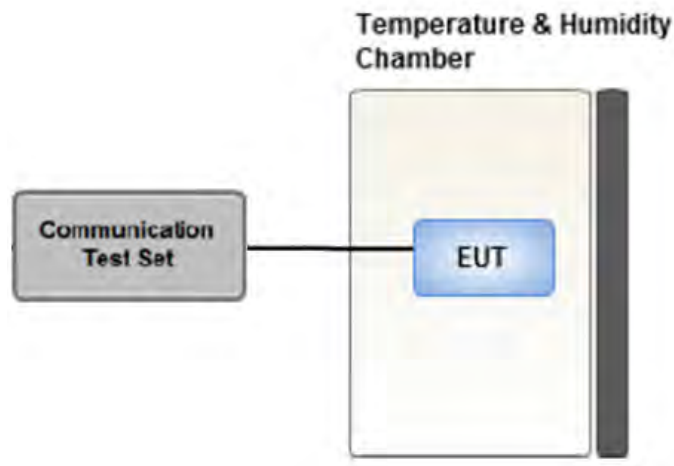

Test setup

#### Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.


### 3.3 RADIATED TEST

#### Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

#### Test Configuration


Below 30 MHz

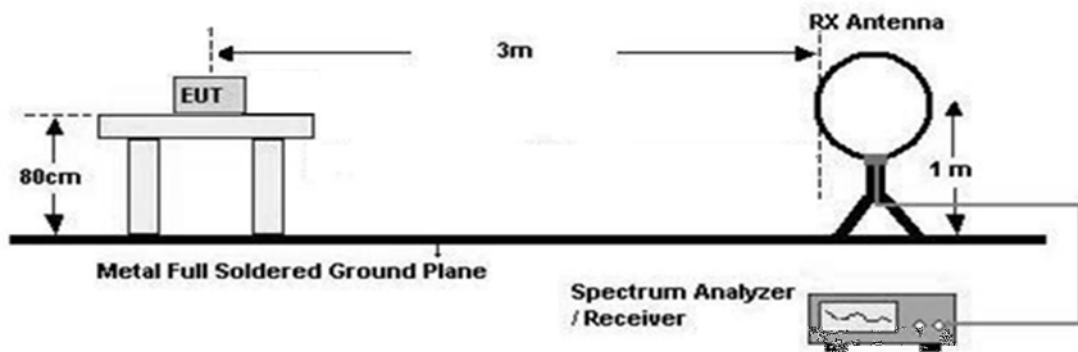

30 MHz - 1 GHz

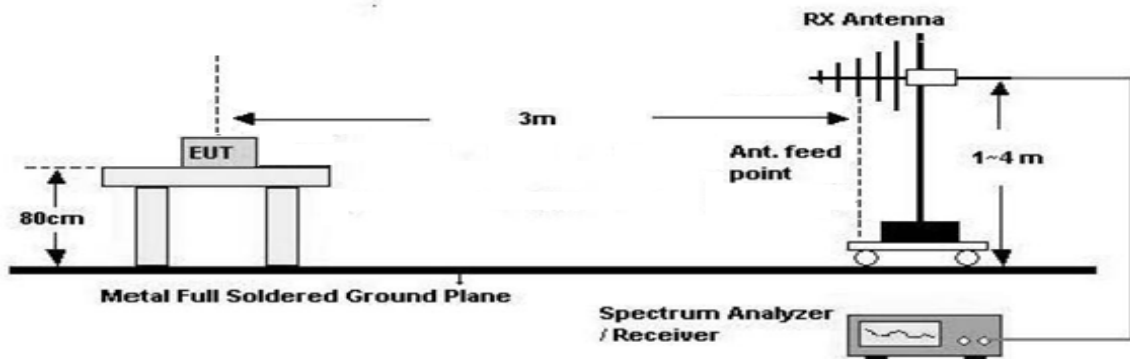

Above 1 GHz

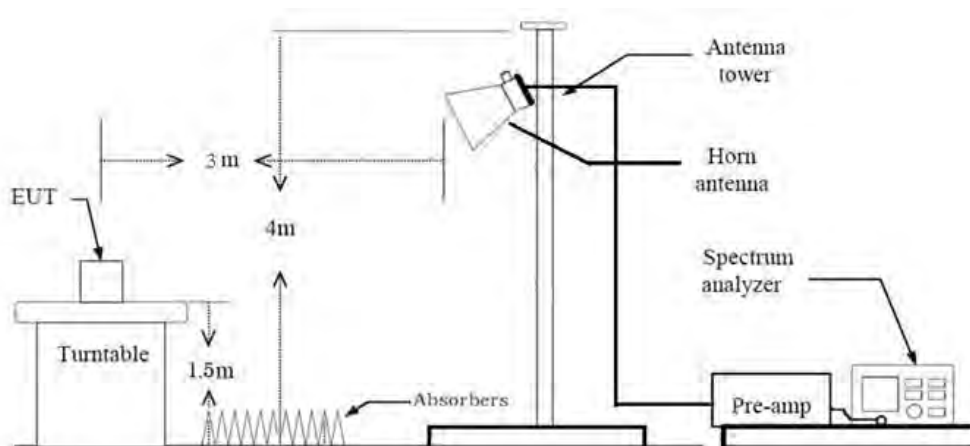

### 3.3.1 RADIATED POWER

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7. Total(dB $\mu$ V/m) = Measured Value(dB $\mu$ V) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
  - = Total (dB $\mu$ V/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
  - = Total (dB $\mu$ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

### 3.3.2 RADIATED SPURIOUS EMISSIONS

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
2. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

#### Below 30 MHz

1. The loop antenna was placed at a location 3 m from the EUT
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$   
Measurement Distance : 3 m
6. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$   
Measurement Distance : 3 m
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. EIRP (dBm)  
= Total (dB $\mu$ V/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)  
= Total (dB $\mu$ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


**Below 1 GHz**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
  - = Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
  - = Total (dBμV/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

**Above 1 GHz**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
  - + H.P.F(dB) - Amp Gain(dB)
8. EIRP (dBm)
  - = Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
  - = Total (dBμV/m) - 95.2(dB)

### 3.4 PEAK- TO- AVERAGE RATIO

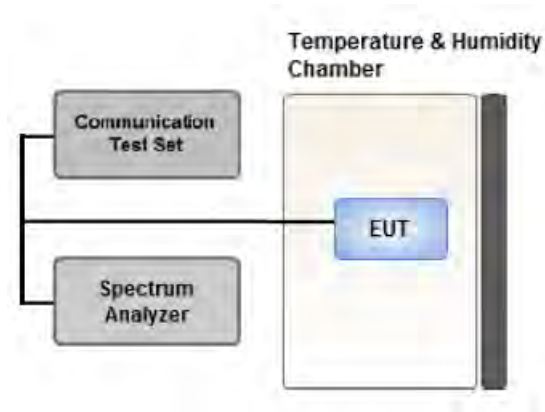

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

## ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### Test Settings(Average Power)

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

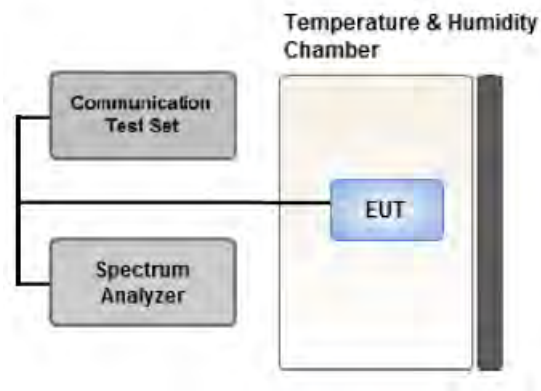

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7



### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

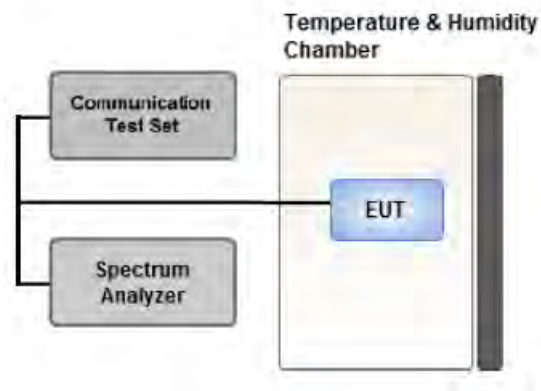

Test setup

#### Test Overview


The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW



### 3.7 CHANNEL EDGE

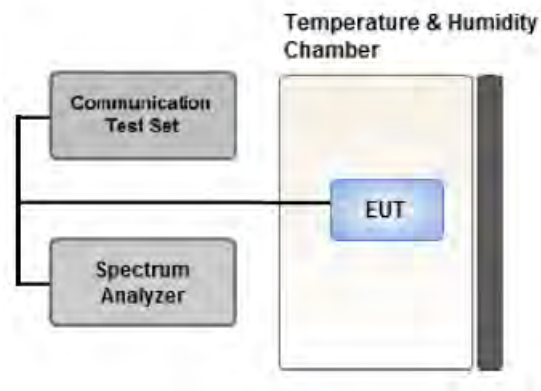

#### Test setup

##### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

##### Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

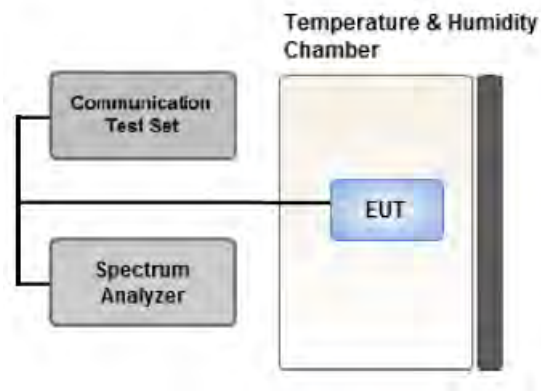

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Internal Antenna, External Antenna (ANT 5, ANT 4, DUT 4)  
 Worst case : Internal Antenna, External Antenna (ANT 5)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.  
 (Worst case : TFGMEIBBCD4)

[ External Antenna Worst case ]

| Test Description                                | Modulation                          | RB size         | RB offset | Axis   |
|-------------------------------------------------|-------------------------------------|-----------------|-----------|--------|
| <b>Effective Radiated Power</b>                 | QPSK,<br>16QAM,<br>64QAM,<br>256QAM | See Section 8.1 |           | Only X |
| <b>Radiated Spurious and Harmonic Emissions</b> | QPSK                                | See Section 8.2 |           | Only X |

[ Internal Antenna Worst case ]

| Test Description                                | Modulation                          | RB size         | RB offset | Axis |
|-------------------------------------------------|-------------------------------------|-----------------|-----------|------|
| <b>Effective Isotropic Radiated Power</b>       | QPSK,<br>16QAM,<br>64QAM,<br>256QAM | See Section 9.1 |           | Z    |
| <b>Radiated Spurious and Harmonic Emissions</b> | QPSK                                | See Section 9.2 |           | Y    |

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.  
(Worst case : TFGMEIBBCD4)

[ Worst case ]

| Test Description                                           | Modulation                          | Bandwidth (MHz) | Frequency            | RB size | RB offset |
|------------------------------------------------------------|-------------------------------------|-----------------|----------------------|---------|-----------|
| <b>Occupied Bandwidth</b>                                  | QPSK,<br>16QAM,<br>64QAM,<br>256QAM | 5, 10, 15, 20   | Mid                  | Full RB | 0         |
| <b>Peak-To-Average Ratio</b>                               | QPSK,<br>16QAM,<br>64QAM,<br>256QAM | 5, 10, 15, 20   | Mid                  | Full RB | 0         |
| <b>Band Edge</b>                                           | QPSK                                | 5               | Low                  | 1       | 0         |
|                                                            |                                     |                 | High                 | 1       | 24        |
|                                                            |                                     | 10              | Low                  | 1       | 0         |
|                                                            |                                     |                 | High                 | 1       | 49        |
|                                                            |                                     | 15              | Low                  | 1       | 0         |
|                                                            |                                     |                 | High                 | 1       | 74        |
|                                                            |                                     | 20              | Low                  | 1       | 0         |
|                                                            |                                     |                 | High                 | 1       | 99        |
|                                                            |                                     | 5, 10, 15, 20   | Low,<br>High         | Full RB | 0         |
|                                                            |                                     |                 | Low,<br>Mid,<br>High | 1       | 0         |
| <b>Spurious and Harmonic Emissions at Antenna Terminal</b> | QPSK                                | 5, 10, 15, 20   | Low,<br>Mid,<br>High | 1       | 0         |



#### 4. LIST OF TEST EQUIPMENT

| Equipment                                 | Model                          | Manufacturer              | Serial No.                 | Due to Calibration | Calibration Interval |
|-------------------------------------------|--------------------------------|---------------------------|----------------------------|--------------------|----------------------|
| Antenna Position Tower                    | MA4640/800-XP-ET               | Innco systems             | N/A                        | N/A                | N/A                  |
| Turn Table                                | DS2000-S                       | Innco systems             | N/A                        | N/A                | N/A                  |
| Turn Table                                | Turn Table                     | Ets                       | N/A                        | N/A                | N/A                  |
| Controller<br>(Antenna mast & Turn Table) | CO3000                         | Innco systems             | CO3000/1251/489<br>20320/P | N/A                | N/A                  |
| Amp & Filter Bank Switch<br>Controller    | FBSM-01B                       | TNM system                | TM20090002                 | N/A                | N/A                  |
| RF Switch System                          | TMX0132C                       | TNM System                | TM21100002                 | N/A                | N/A                  |
| RF Switch System                          | FBSR-04C(3G HPF+LNA)           | TNM System                | S4L1                       | 08/18/2024         | Annual               |
| RF Switch System                          | FBSR-04C(LNA)                  | TNM System                | S4L4                       | 08/18/2024         | Annual               |
| RF Switch System                          | FBSR-04C(Thru)                 | TNM System                | S4L6                       | 08/18/2024         | Annual               |
| HIGHPASS FILTER                           | WHKX10-900-1000-15000-<br>40SS | WAINWRIGHT<br>INSTRUMENTS | 16                         | 08/01/2024         | Annual               |
| HIGHPASS FILTER                           | WHNX6.0/26.5G-6SS              | WAINWRIGHT<br>INSTRUMENTS | 1                          | 01/19/2024         | Annual               |
| Power Amplifier                           | CBL18265035                    | CERNEK                    | 22966                      | 12/01/2023         | Annual               |
| Power Amplifier                           | CBL26405040                    | CERNEK                    | 25956                      | 03/02/2024         | Annual               |
| Loop Antenna(9 kHz ~ 30 MHz)              | FMZB1513                       | Schwarzbeck               | 1513-333                   | 03/17/2024         | Biennial             |
| Horn Antenna(1 ~ 18 GHz)                  | BBHA 9120                      | Schwarzbeck               | 937                        | 02/13/2025         | Biennial             |
| Horn Antenna(15 ~ 40 GHz)                 | BBHA 9170                      | Schwarzbeck               | BBHA9170342                | 09/29/2024         | Biennial             |
| Bilog Antenna                             | VULB9160                       | Schwarzbeck               | 3150                       | 03/09/2025         | Biennial             |
| Hybrid Antenna                            | VULB9160                       | Schwarzbeck               | 760                        | 02/24/2025         | Biennial             |
| Trilog Broadband Antenna                  | VULB 9168                      | Schwarzbeck               | 895                        | 08/16/2024         | Biennial             |
| Chamber                                   | SU-642                         | ESPEC                     | 93008124                   | 02/22/2024         | Annual               |
| Power Splitter(DC~26.5 GHz)               | 11667B                         | Hewlett Packard           | 11275                      | 03/02/2024         | Annual               |
| DC Power Supply                           | E3632A                         | Agilent                   | MY40010147                 | 06/23/2024         | Annual               |
| 4-Way Divider                             | ZC4PD-K1844+                   | Mini-Circuits             | 942907                     | 09/19/2024         | Annual               |
| ATTENUATOR(20 dB)                         | 8493C                          | Hewlett Packard           | 17280                      | 04/19/2024         | Annual               |
| Spectrum Analyzer(10 Hz ~ 40<br>GHz)      | FSV40                          | REOHDE &<br>SCHWARZ       | 101436                     | 02/22/2024         | Annual               |
| Base Station                              | 8960 (E5515C)                  | Agilent                   | MY48360800                 | 08/10/2024         | Annual               |
| Wideband Radio<br>Communication Tester    | MT8821C                        | Anritsu Corp.             | 6262287701                 | 05/22/2024         | Annual               |
| Wideband Radio<br>Communication Tester    | MT8000A                        | Anritsu Corp.             | 6262302511                 | 05/23/2024         | Annual               |
| SIGNAL GENERATOR<br>(100 kHz ~ 40 GHz)    | SMB100A                        | REOHDE &<br>SCHWARZ       | 177633                     | 06/22/2024         | Annual               |



|                                                      |        |                |            |            |        |
|------------------------------------------------------|--------|----------------|------------|------------|--------|
| Signal Analyzer(10 Hz ~ 26.5 GHz)                    | N9020A | Agilent        | MY52090906 | 04/20/2024 | Annual |
| Signal Analyzer(5 Hz ~ 40.0 GHz)                     | N9030B | KEYSIGHT       | MY55480167 | 05/24/2024 | Annual |
| FCC LTE Mobile Conducted RF Automation Test Software | -      | HCT CO., LTD., | -          | -          | -      |

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).



## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.90 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.14 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.82 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.74 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.76 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (Above 40 GHz)      | 5.52 (Confidence level about 95 %, $k=2$ ) |

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

| Test Description                                                 | FCC Part Section(s)        | Test Limit                                                                                                                                                                                                                                                                                                                                                                             | Test Result |
|------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Occupied Bandwidth                                               | § 2.1049                   | N/A                                                                                                                                                                                                                                                                                                                                                                                    | PASS        |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | § 2.1051,<br>§ 27.53(m)(4) | <ul style="list-style-type: none"> <li>■ &lt; 40 + 10log<sub>10</sub> (P[Watts]) at Channel edges</li> <li>■ &lt; 43 + 10log<sub>10</sub> (P[Watts]) between 5 and X MHz from Channel edges</li> <li>■ &lt; 55 + 10log<sub>10</sub> (P[Watts]) beyond X MHz beyond from Channel edges</li> <li>■ &lt; 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul> | PASS        |
| Conducted Output Power                                           | § 2.1046                   | N/A                                                                                                                                                                                                                                                                                                                                                                                    | PASS        |
| Frequency stability / variation of ambient temperature           | § 2.1055,<br>§ 27.54       | Emission must remain in band                                                                                                                                                                                                                                                                                                                                                           | PASS        |

### 6.2 Test Condition : Radiated Test

| Test Description                         | FCC Part Section(s)        | Test Limit                            | Test Result |
|------------------------------------------|----------------------------|---------------------------------------|-------------|
| Equivalent Isotropic Radiated Power      | § 27.50(h)(2)              | < 2 Watts max. EIRP                   | PASS        |
| Radiated Spurious and Harmonic Emissions | § 2.1053,<br>§ 27.53(m)(4) | < 55 + 10log <sub>10</sub> (P[Watts]) | PASS        |

## 7. EMISSION DESIGNATOR

### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 Conducted Output Power

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) |          |            |
|-----------|------------|---------|-----------|-------------------------|----------|------------|
|           |            |         |           | 20775                   | 21100    | 21425      |
|           |            |         |           | 2502.5 MHz              | 2535 MHz | 2567.5 MHz |
| 5 MHz     | QPSK       | 1       | 0         | 23.24                   | 23.30    | 23.26      |
|           |            | 1       | 12        | 23.35                   | 23.26    | 23.01      |
|           |            | 1       | 24        | 23.34                   | 23.30    | 22.90      |
|           |            | 12      | 0         | 22.47                   | 22.47    | 22.42      |
|           |            | 12      | 6         | 22.53                   | 22.52    | 22.46      |
|           |            | 12      | 11        | 22.47                   | 22.50    | 22.41      |
|           |            | 25      | 0         | 22.52                   | 22.51    | 22.40      |
|           | 16QAM      | 1       | 0         | 22.73                   | 22.71    | 22.61      |
|           |            | 1       | 12        | 22.63                   | 22.58    | 22.63      |
|           |            | 1       | 24        | 22.70                   | 22.75    | 22.56      |
|           |            | 12      | 0         | 21.54                   | 21.46    | 21.47      |
|           |            | 12      | 6         | 21.51                   | 21.49    | 21.51      |
|           |            | 12      | 11        | 21.51                   | 21.50    | 21.50      |
|           |            | 25      | 0         | 21.56                   | 21.50    | 21.48      |
|           | 64QAM      | 1       | 0         | 22.54                   | 21.57    | 21.02      |
|           |            | 1       | 12        | 22.46                   | 21.43    | 21.04      |
|           |            | 1       | 24        | 20.65                   | 21.54    | 21.03      |
|           |            | 12      | 0         | 20.61                   | 20.53    | 20.08      |
|           |            | 12      | 6         | 20.57                   | 20.53    | 20.12      |
|           |            | 12      | 11        | 20.54                   | 20.50    | 20.08      |
|           |            | 25      | 0         | 20.54                   | 20.49    | 20.03      |
|           | 256QAM     | 1       | 0         | 18.70                   | 18.57    | 18.61      |
|           |            | 1       | 12        | 18.17                   | 18.73    | 18.55      |
|           |            | 1       | 24        | 18.52                   | 18.78    | 18.63      |
|           |            | 12      | 0         | 18.56                   | 18.50    | 18.46      |
|           |            | 12      | 6         | 18.55                   | 18.53    | 18.51      |
|           |            | 12      | 11        | 18.50                   | 18.52    | 18.49      |
|           |            | 25      | 0         | 18.53                   | 18.51    | 18.50      |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) |          |          |
|-----------|------------|---------|-----------|-------------------------|----------|----------|
|           |            |         |           | 20800                   | 21100    | 21400    |
|           |            |         |           | 2505 MHz                | 2535 MHz | 2565 MHz |
| 10 MHz    | QPSK       | 1       | 0         | 23.22                   | 23.44    | 23.36    |
|           |            | 1       | 24        | 23.36                   | 23.20    | 23.11    |
|           |            | 1       | 49        | 23.35                   | 23.22    | 22.87    |
|           |            | 25      | 0         | 22.49                   | 22.46    | 22.40    |
|           |            | 25      | 12        | 22.57                   | 22.55    | 22.49    |
|           |            | 25      | 24        | 22.53                   | 22.48    | 22.46    |
|           |            | 50      | 0         | 22.53                   | 22.54    | 22.40    |
|           | 16QAM      | 1       | 0         | 22.66                   | 22.74    | 22.48    |
|           |            | 1       | 24        | 22.66                   | 22.62    | 22.77    |
|           |            | 1       | 49        | 22.71                   | 22.62    | 22.71    |
|           |            | 25      | 0         | 21.44                   | 21.48    | 21.41    |
|           |            | 25      | 12        | 21.58                   | 21.60    | 21.39    |
|           |            | 25      | 24        | 21.53                   | 21.47    | 21.48    |
|           |            | 50      | 0         | 21.57                   | 21.53    | 21.45    |
|           | 64QAM      | 1       | 0         | 21.54                   | 21.58    | 21.26    |
|           |            | 1       | 24        | 21.55                   | 21.51    | 21.12    |
|           |            | 1       | 49        | 21.76                   | 21.43    | 20.99    |
|           |            | 25      | 0         | 20.55                   | 20.56    | 20.17    |
|           |            | 25      | 12        | 20.59                   | 20.50    | 20.12    |
|           |            | 25      | 24        | 20.62                   | 20.55    | 19.97    |
|           |            | 50      | 0         | 20.59                   | 20.58    | 19.98    |
|           | 256QAM     | 1       | 0         | 18.61                   | 18.44    | 19.20    |
|           |            | 1       | 24        | 18.49                   | 18.45    | 18.62    |
|           |            | 1       | 49        | 18.12                   | 18.24    | 18.68    |
|           |            | 25      | 0         | 18.48                   | 18.48    | 18.33    |
|           |            | 25      | 12        | 18.65                   | 18.57    | 18.47    |
|           |            | 25      | 24        | 18.55                   | 18.51    | 18.48    |
|           |            | 50      | 0         | 18.58                   | 18.57    | 18.45    |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) |          |            |
|-----------|------------|---------|-----------|-------------------------|----------|------------|
|           |            |         |           | 20825                   | 21100    | 21375      |
|           |            |         |           | 2507.5 MHz              | 2535 MHz | 2562.5 MHz |
| 15 MHz    | QPSK       | 1       | 0         | 23.52                   | 23.56    | 23.26      |
|           |            | 1       | 36        | 23.35                   | 23.34    | 22.97      |
|           |            | 1       | 74        | 23.00                   | 23.34    | 22.75      |
|           |            | 36      | 0         | 22.46                   | 22.40    | 22.45      |
|           |            | 36      | 18        | 22.55                   | 22.45    | 22.37      |
|           |            | 36      | 39        | 22.47                   | 22.34    | 22.47      |
|           |            | 75      | 0         | 22.56                   | 22.48    | 22.39      |
|           | 16QAM      | 1       | 0         | 22.75                   | 22.66    | 22.59      |
|           |            | 1       | 36        | 22.79                   | 22.64    | 22.81      |
|           |            | 1       | 74        | 22.74                   | 22.52    | 22.69      |
|           |            | 36      | 0         | 21.51                   | 21.44    | 21.44      |
|           |            | 36      | 18        | 21.55                   | 21.51    | 21.45      |
|           |            | 36      | 39        | 21.48                   | 21.32    | 21.50      |
|           |            | 75      | 0         | 21.55                   | 21.46    | 21.39      |
|           | 64QAM      | 1       | 0         | 21.90                   | 21.64    | 21.65      |
|           |            | 1       | 36        | 21.69                   | 21.57    | 21.06      |
|           |            | 1       | 74        | 21.59                   | 21.44    | 21.01      |
|           |            | 36      | 0         | 20.50                   | 20.46    | 20.26      |
|           |            | 36      | 18        | 20.61                   | 20.52    | 20.15      |
|           |            | 36      | 39        | 20.61                   | 20.45    | 20.07      |
|           |            | 75      | 0         | 20.54                   | 20.42    | 20.16      |
|           | 256QAM     | 1       | 0         | 18.70                   | 18.75    | 18.55      |
|           |            | 1       | 36        | 18.53                   | 18.49    | 18.68      |
|           |            | 1       | 74        | 18.60                   | 18.47    | 18.62      |
|           |            | 36      | 0         | 18.51                   | 18.52    | 18.43      |
|           |            | 36      | 18        | 18.64                   | 18.51    | 18.45      |
|           |            | 36      | 39        | 18.60                   | 18.48    | 18.47      |
|           |            | 75      | 0         | 18.59                   | 18.46    | 18.36      |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) |          |          |
|-----------|------------|---------|-----------|-------------------------|----------|----------|
|           |            |         |           | 20850                   | 21100    | 21350    |
|           |            |         |           | 2510 MHz                | 2535 MHz | 2560 MHz |
| 20 MHz    | QPSK       | 1       | 0         | 23.53                   | 23.45    | 23.34    |
|           |            | 1       | 49        | 23.54                   | 23.44    | 23.36    |
|           |            | 1       | 99        | 23.12                   | 23.19    | 23.28    |
|           |            | 50      | 0         | 22.50                   | 22.47    | 22.51    |
|           |            | 50      | 25        | 22.62                   | 22.48    | 22.52    |
|           |            | 50      | 49        | 22.57                   | 22.48    | 22.47    |
|           |            | 100     | 0         | 22.62                   | 22.47    | 22.41    |
|           | 16QAM      | 1       | 0         | 22.84                   | 22.71    | 22.58    |
|           |            | 1       | 49        | 22.61                   | 22.49    | 22.60    |
|           |            | 1       | 99        | 22.84                   | 22.48    | 22.55    |
|           |            | 50      | 0         | 21.52                   | 21.44    | 21.50    |
|           |            | 50      | 25        | 21.54                   | 21.54    | 21.54    |
|           |            | 50      | 49        | 21.67                   | 21.51    | 21.54    |
|           |            | 100     | 0         | 21.57                   | 21.58    | 21.45    |
|           | 64QAM      | 1       | 0         | 21.80                   | 21.67    | 21.85    |
|           |            | 1       | 49        | 21.66                   | 21.68    | 21.49    |
|           |            | 1       | 99        | 21.67                   | 21.47    | 21.10    |
|           |            | 50      | 0         | 20.56                   | 20.53    | 20.48    |
|           |            | 50      | 25        | 20.62                   | 20.54    | 20.36    |
|           |            | 50      | 49        | 20.53                   | 20.48    | 20.16    |
|           |            | 100     | 0         | 20.56                   | 20.49    | 20.25    |
|           | 256QAM     | 1       | 0         | 18.68                   | 18.45    | 18.46    |
|           |            | 1       | 49        | 18.77                   | 18.62    | 18.69    |
|           |            | 1       | 99        | 18.56                   | 18.49    | 18.61    |
|           |            | 50      | 0         | 18.56                   | 18.50    | 18.49    |
|           |            | 50      | 25        | 18.62                   | 18.54    | 18.53    |
|           |            | 50      | 49        | 18.66                   | 18.53    | 18.50    |
|           |            | 100     | 0         | 18.58                   | 18.58    | 18.46    |

## 8.2 EQUIVALENT ISOTROPIC RADIATED POWER

### 8.2.1 External Antenna

| Freq (MHz) | Bandwidth        | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                  |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2502.5     | LTE B7/<br>5 MHz | QPSK       | 83.97                       | 35.81              | 119.78               | V   | < 2.00 | 0.287 | 24.58 | 1    | 24     |  |
|            |                  | 16-QAM     | 83.25                       | 35.81              | 119.06               | V   |        | 0.243 | 23.86 |      |        |  |
|            |                  | 64-QAM     | 81.72                       | 35.81              | 117.53               | V   |        | 0.171 | 22.33 |      |        |  |
|            |                  | 256-QAM    | 79.20                       | 35.81              | 115.01               | V   |        | 0.096 | 19.81 |      |        |  |
| 2535.0     |                  | QPSK       | 84.45                       | 35.58              | 120.03               | V   |        | 0.304 | 24.83 | 1    | 24     |  |
|            |                  | 16-QAM     | 83.68                       | 35.58              | 119.26               | V   |        | 0.255 | 24.06 |      |        |  |
|            |                  | 64-QAM     | 81.50                       | 35.58              | 117.08               | V   |        | 0.154 | 21.88 |      |        |  |
|            |                  | 256-QAM    | 80.25                       | 35.58              | 115.83               | V   |        | 0.116 | 20.63 |      |        |  |
| 2567.5     |                  | QPSK       | 83.30                       | 35.57              | 118.87               | V   |        | 0.233 | 23.67 | 1    | 24     |  |
|            |                  | 16-QAM     | 82.45                       | 35.57              | 118.02               | V   |        | 0.191 | 22.82 |      |        |  |
|            |                  | 64-QAM     | 80.25                       | 35.57              | 115.82               | V   |        | 0.115 | 20.62 |      |        |  |
|            |                  | 256-QAM    | 79.00                       | 35.57              | 114.57               | V   |        | 0.086 | 19.37 |      |        |  |

| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2505.0     | LTE B7/<br>10 MHz | QPSK       | 84.05                       | 35.84              | 119.89               | V   | < 2.00 | 0.294 | 24.69 | 1    | 49     |  |
|            |                   | 16-QAM     | 83.31                       | 35.84              | 119.15               | V   |        | 0.248 | 23.95 |      |        |  |
|            |                   | 64-QAM     | 81.25                       | 35.84              | 117.09               | V   |        | 0.155 | 21.89 |      |        |  |
|            |                   | 256-QAM    | 79.60                       | 35.84              | 115.44               | V   |        | 0.106 | 20.24 |      |        |  |
| 2535.0     |                   | QPSK       | 84.25                       | 35.58              | 119.83               | V   |        | 0.290 | 24.63 | 1    | 0      |  |
|            |                   | 16-QAM     | 83.35                       | 35.58              | 118.93               | V   |        | 0.236 | 23.73 |      |        |  |
|            |                   | 64-QAM     | 81.11                       | 35.58              | 116.69               | V   |        | 0.141 | 21.49 |      |        |  |
|            |                   | 256-QAM    | 79.71                       | 35.58              | 115.29               | V   |        | 0.102 | 20.09 |      |        |  |
| 2565.0     |                   | QPSK       | 83.00                       | 35.62              | 118.62               | V   |        | 0.220 | 23.42 | 1    | 25     |  |
|            |                   | 16-QAM     | 82.30                       | 35.62              | 117.92               | V   |        | 0.187 | 22.72 |      |        |  |
|            |                   | 64-QAM     | 80.05                       | 35.62              | 115.67               | V   |        | 0.111 | 20.47 |      |        |  |
|            |                   | 256-QAM    | 78.92                       | 35.62              | 114.54               | V   |        | 0.086 | 19.34 |      |        |  |



| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2507.5     |                   | QPSK       | 84.10                       | 35.78              | 119.88               | V   | < 2.00 | 0.294 | 24.68 | 1    | 38     |  |
|            |                   | 16-QAM     | 83.31                       | 35.78              | 119.09               | V   |        | 0.245 | 23.89 |      |        |  |
|            |                   | 64-QAM     | 81.20                       | 35.78              | 116.98               | V   |        | 0.151 | 21.78 |      |        |  |
|            |                   | 256-QAM    | 79.79                       | 35.78              | 115.57               | V   |        | 0.109 | 20.37 |      |        |  |
| 2535.0     | LTE B7/<br>15 MHz | QPSK       | 84.20                       | 35.58              | 119.78               | V   | < 2.00 | 0.287 | 24.58 | 1    | 38     |  |
|            |                   | 16-QAM     | 83.36                       | 35.58              | 118.94               | V   |        | 0.237 | 23.74 |      |        |  |
|            |                   | 64-QAM     | 81.27                       | 35.58              | 116.85               | V   |        | 0.146 | 21.65 |      |        |  |
|            |                   | 256-QAM    | 80.00                       | 35.58              | 115.58               | V   |        | 0.109 | 20.38 |      |        |  |
| 2562.5     |                   | QPSK       | 83.23                       | 35.61              | 118.84               | V   | < 2.00 | 0.231 | 23.64 | 1    | 0      |  |
|            |                   | 16-QAM     | 82.62                       | 35.61              | 118.23               | V   |        | 0.201 | 23.03 |      |        |  |
|            |                   | 64-QAM     | 80.49                       | 35.61              | 116.10               | V   |        | 0.123 | 20.90 |      |        |  |
|            |                   | 256-QAM    | 79.22                       | 35.61              | 114.83               | V   |        | 0.092 | 19.63 |      |        |  |

| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2510.0     |                   | QPSK       | 84.00                       | 35.71              | 119.71               | V   | < 2.00 | 0.283 | 24.51 | 1    | 50     |  |
|            |                   | 16-QAM     | 83.25                       | 35.71              | 118.96               | V   |        | 0.238 | 23.76 |      |        |  |
|            |                   | 64-QAM     | 81.27                       | 35.71              | 116.98               | V   |        | 0.151 | 21.78 |      |        |  |
|            |                   | 256-QAM    | 79.70                       | 35.71              | 115.41               | V   |        | 0.105 | 20.21 |      |        |  |
| 2535.0     | LTE B7/<br>20 MHz | QPSK       | 84.25                       | 35.58              | 119.83               | V   | < 2.00 | 0.290 | 24.63 | 1    | 50     |  |
|            |                   | 16-QAM     | 83.53                       | 35.58              | 119.11               | V   |        | 0.246 | 23.91 |      |        |  |
|            |                   | 64-QAM     | 81.49                       | 35.58              | 117.07               | V   |        | 0.154 | 21.87 |      |        |  |
|            |                   | 256-QAM    | 80.18                       | 35.58              | 115.76               | V   |        | 0.114 | 20.56 |      |        |  |
| 2560.0     |                   | QPSK       | 83.45                       | 35.58              | 119.03               | V   | < 2.00 | 0.242 | 23.83 | 1    | 0      |  |
|            |                   | 16-QAM     | 82.76                       | 35.58              | 118.34               | V   |        | 0.206 | 23.14 |      |        |  |
|            |                   | 64-QAM     | 80.85                       | 35.58              | 116.43               | V   |        | 0.133 | 21.23 |      |        |  |
|            |                   | 256-QAM    | 79.41                       | 35.58              | 114.99               | V   |        | 0.095 | 19.79 |      |        |  |

### 8.2.2 Internal Antenna

| Freq (MHz) | Bandwidth        | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                  |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2502.5     | LTE B7/<br>5 MHz | QPSK       | 87.79                       | 35.81              | 123.60               | V   | < 2.00 | 0.692 | 28.40 | 1    | 24     |  |
|            |                  | 16-QAM     | 87.17                       | 35.81              | 122.98               | V   |        | 0.600 | 27.78 |      |        |  |
|            |                  | 64-QAM     | 86.03                       | 35.81              | 121.84               | V   |        | 0.461 | 26.64 |      |        |  |
|            |                  | 256-QAM    | 83.10                       | 35.81              | 118.91               | V   |        | 0.235 | 23.71 |      |        |  |
| 2535.0     |                  | QPSK       | 88.57                       | 35.58              | 124.15               | V   |        | 0.785 | 28.95 | 1    | 24     |  |
|            |                  | 16-QAM     | 87.95                       | 35.58              | 123.53               | V   |        | 0.681 | 28.33 |      |        |  |
|            |                  | 64-QAM     | 86.85                       | 35.58              | 122.43               | V   |        | 0.529 | 27.23 |      |        |  |
|            |                  | 256-QAM    | 83.87                       | 35.58              | 119.45               | V   |        | 0.266 | 24.25 |      |        |  |
| 2567.5     |                  | QPSK       | 89.24                       | 35.57              | 124.81               | V   |        | 0.914 | 29.61 | 1    | 0      |  |
|            |                  | 16-QAM     | 88.57                       | 35.57              | 124.14               | V   |        | 0.783 | 28.94 |      |        |  |
|            |                  | 64-QAM     | 87.07                       | 35.57              | 122.64               | V   |        | 0.555 | 27.44 |      |        |  |
|            |                  | 256-QAM    | 84.50                       | 35.57              | 120.07               | V   |        | 0.307 | 24.87 |      |        |  |

| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2505.0     | LTE B7/<br>10 MHz | QPSK       | 87.95                       | 35.84              | 123.79               | V   | < 2.00 | 0.723 | 28.59 | 1    | 49     |  |
|            |                   | 16-QAM     | 87.49                       | 35.84              | 123.33               | V   |        | 0.650 | 28.13 |      |        |  |
|            |                   | 64-QAM     | 86.29                       | 35.84              | 122.13               | V   |        | 0.493 | 26.93 |      |        |  |
|            |                   | 256-QAM    | 83.25                       | 35.84              | 119.09               | V   |        | 0.245 | 23.89 |      |        |  |
| 2535.0     |                   | QPSK       | 88.72                       | 35.58              | 124.30               | V   |        | 0.813 | 29.10 | 1    | 49     |  |
|            |                   | 16-QAM     | 88.15                       | 35.58              | 123.73               | V   |        | 0.713 | 28.53 |      |        |  |
|            |                   | 64-QAM     | 86.94                       | 35.58              | 122.52               | V   |        | 0.540 | 27.32 |      |        |  |
|            |                   | 256-QAM    | 83.98                       | 35.58              | 119.56               | V   |        | 0.273 | 24.36 |      |        |  |
| 2565.0     |                   | QPSK       | 89.13                       | 35.62              | 124.75               | V   |        | 0.902 | 29.55 | 1    | 0      |  |
|            |                   | 16-QAM     | 88.61                       | 35.62              | 124.23               | V   |        | 0.800 | 29.03 |      |        |  |
|            |                   | 64-QAM     | 87.38                       | 35.62              | 123.00               | V   |        | 0.603 | 27.80 |      |        |  |
|            |                   | 256-QAM    | 84.37                       | 35.62              | 119.99               | V   |        | 0.301 | 24.79 |      |        |  |

| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2507.5     |                   | QPSK       | 88.18                       | 35.78              | 123.96               | V   | < 2.00 | 0.752 | 28.76 | 1    | 74     |  |
|            |                   | 16-QAM     | 87.54                       | 35.78              | 123.32               | V   |        | 0.649 | 28.12 |      |        |  |
|            |                   | 64-QAM     | 86.49                       | 35.78              | 122.27               | V   |        | 0.509 | 27.07 |      |        |  |
|            |                   | 256-QAM    | 83.50                       | 35.78              | 119.28               | V   |        | 0.256 | 24.08 |      |        |  |
| 2535.0     | LTE B7/<br>15 MHz | QPSK       | 88.79                       | 35.58              | 124.37               | V   | < 2.00 | 0.826 | 29.17 | 1    | 74     |  |
|            |                   | 16-QAM     | 88.18                       | 35.58              | 123.76               | V   |        | 0.718 | 28.56 |      |        |  |
|            |                   | 64-QAM     | 87.08                       | 35.58              | 122.66               | V   |        | 0.557 | 27.46 |      |        |  |
|            |                   | 256-QAM    | 84.04                       | 35.58              | 119.62               | V   |        | 0.277 | 24.42 |      |        |  |
| 2562.5     |                   | QPSK       | 89.50                       | 35.61              | 125.11               | V   | < 2.00 | 0.979 | 29.91 | 1    | 0      |  |
|            |                   | 16-QAM     | 88.98                       | 35.61              | 124.59               | V   |        | 0.869 | 29.39 |      |        |  |
|            |                   | 64-QAM     | 87.81                       | 35.61              | 123.42               | V   |        | 0.664 | 28.22 |      |        |  |
|            |                   | 256-QAM    | 84.75                       | 35.61              | 120.36               | V   |        | 0.328 | 25.16 |      |        |  |

| Freq (MHz) | Bandwidth         | Modulation | Measured Level (dB $\mu$ V) | A.F+C.L+D.F (dB/m) | Total (dB $\mu$ V/m) | Pol | Limit  |       | EIRP  |      | RB     |  |
|------------|-------------------|------------|-----------------------------|--------------------|----------------------|-----|--------|-------|-------|------|--------|--|
|            |                   |            |                             |                    |                      |     | W      | W     | dBm   | Size | Offset |  |
| 2510.0     |                   | QPSK       | 88.32                       | 35.71              | 124.03               | V   | < 2.00 | 0.764 | 28.83 | 1    | 99     |  |
|            |                   | 16-QAM     | 87.68                       | 35.71              | 123.39               | V   |        | 0.659 | 28.19 |      |        |  |
|            |                   | 64-QAM     | 86.64                       | 35.71              | 122.35               | V   |        | 0.519 | 27.15 |      |        |  |
|            |                   | 256-QAM    | 83.67                       | 35.71              | 119.38               | V   |        | 0.262 | 24.18 |      |        |  |
| 2535.0     | LTE B7/<br>20 MHz | QPSK       | 88.54                       | 35.58              | 124.12               | V   | < 2.00 | 0.780 | 28.92 | 1    | 99     |  |
|            |                   | 16-QAM     | 88.05                       | 35.58              | 123.63               | V   |        | 0.697 | 28.43 |      |        |  |
|            |                   | 64-QAM     | 86.88                       | 35.58              | 122.46               | V   |        | 0.532 | 27.26 |      |        |  |
|            |                   | 256-QAM    | 83.81                       | 35.58              | 119.39               | V   |        | 0.262 | 24.19 |      |        |  |
| 2560.0     |                   | QPSK       | 89.26                       | 35.58              | 124.84               | V   | < 2.00 | 0.920 | 29.64 | 1    | 0      |  |
|            |                   | 16-QAM     | 88.73                       | 35.58              | 124.31               | V   |        | 0.815 | 29.11 |      |        |  |
|            |                   | 64-QAM     | 87.54                       | 35.58              | 123.12               | V   |        | 0.619 | 27.92 |      |        |  |
|            |                   | 256-QAM    | 84.49                       | 35.58              | 120.07               | V   |        | 0.307 | 24.87 |      |        |  |

### 8.3 RADIATED SPURIOUS EMISSIONS

#### 8.3.1 External Antenna

- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch                | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F<br>-A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|-------------------|------------|-----------------------------|----------------------------------|----------------------|------|--------------|-------------|------|--------|
|                   |            |                             |                                  |                      |      |              |             | Size | Offset |
| 20775<br>(2502.5) | 5 005.00   | 64.22                       | -7.44                            | 56.78                | V    | -38.42       | -25.00      | 1    | 24     |
|                   | 7 507.50   | 56.37                       | -0.82                            | 55.55                | V    | -39.65       | -25.00      |      |        |
|                   | 10 010.00  | 48.77                       | 4.79                             | 53.56                | V    | -41.64       | -25.00      |      |        |
|                   | 12 512.50  | 46.70                       | 5.33                             | 52.03                | V    | -43.17       | -25.00      |      |        |
|                   | 15 015.00  | 48.06                       | 8.96                             | 57.02                | V    | -38.18       | -25.00      |      |        |
| 21100<br>(2535.0) | 5 070.00   | 70.40                       | -7.19                            | 63.21                | V    | -31.99       | -25.00      | 1    | 24     |
|                   | 7 605.00   | 58.15                       | -1.09                            | 57.06                | V    | -38.14       | -25.00      |      |        |
|                   | 10 140.00  | 49.05                       | 3.99                             | 53.04                | V    | -42.16       | -25.00      |      |        |
|                   | 12 675.00  | 47.49                       | 5.65                             | 53.14                | V    | -42.06       | -25.00      |      |        |
|                   | 15 210.00  | 47.95                       | 7.18                             | 55.13                | V    | -40.07       | -25.00      |      |        |
| 21425<br>(2567.5) | 5 135.00   | 71.07                       | -7.11                            | 63.96                | V    | -31.24       | -25.00      | 1    | 24     |
|                   | 7 702.50   | 55.42                       | -1.00                            | 54.42                | V    | -40.78       | -25.00      |      |        |
|                   | 10 270.00  | 48.33                       | 5.29                             | 53.62                | V    | -41.58       | -25.00      |      |        |
|                   | 12 837.50  | 47.33                       | 6.26                             | 53.59                | V    | -41.61       | -25.00      |      |        |
|                   | 15 405.00  | 48.12                       | 6.12                             | 54.24                | V    | -40.96       | -25.00      |      |        |



- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch                | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|-------------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                   |            |                             |                               |                      |      |              |             | Size | Offset |
| 20800<br>(2505.0) | 5 010.00   | 68.44                       | -7.42                         | 61.02                | V    | -34.18       | -25.00      | 1    | 49     |
|                   | 7 515.00   | 57.89                       | -0.83                         | 57.06                | V    | -38.14       | -25.00      |      |        |
|                   | 10 020.00  | 48.98                       | 4.67                          | 53.65                | V    | -41.55       | -25.00      |      |        |
|                   | 12 525.00  | 47.68                       | 5.44                          | 53.12                | V    | -42.08       | -25.00      |      |        |
|                   | 15 030.00  | 48.55                       | 8.85                          | 57.40                | V    | -37.80       | -25.00      |      |        |
| 21100<br>(2535.0) | 5 070.00   | 69.75                       | -7.19                         | 62.56                | V    | -32.64       | -25.00      | 1    | 0      |
|                   | 7 605.00   | 58.89                       | -1.09                         | 57.80                | V    | -37.40       | -25.00      |      |        |
|                   | 10 140.00  | 49.68                       | 3.99                          | 53.67                | V    | -41.53       | -25.00      |      |        |
|                   | 12 675.00  | 47.73                       | 5.65                          | 53.38                | V    | -41.82       | -25.00      |      |        |
|                   | 15 210.00  | 47.96                       | 7.18                          | 55.14                | V    | -40.06       | -25.00      |      |        |
| 21400<br>(2565.0) | 5 130.00   | 71.92                       | -7.09                         | 64.83                | V    | -30.37       | -25.00      | 1    | 25     |
|                   | 7 695.00   | 57.73                       | -1.00                         | 56.73                | V    | -38.47       | -25.00      |      |        |
|                   | 10 260.00  | 49.15                       | 5.06                          | 54.21                | V    | -40.99       | -25.00      |      |        |
|                   | 12 825.00  | 47.57                       | 6.24                          | 53.81                | V    | -41.39       | -25.00      |      |        |
|                   | 15 390.00  | 49.49                       | 6.20                          | 55.69                | V    | -39.51       | -25.00      |      |        |

□ MODE: LTE B7  
 □ MODULATION SIGNAL: 15 MHz QPSK  
 □ DISTANCE: 3 meters  
 □ LIMIT: -25.00 dBm

| Ch             | Freq (MHz) | Measured Level (dBμV) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dBμV/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|----------------|------------|-----------------------|-------------------------------|----------------|------|--------------|-------------|------|--------|
|                |            |                       |                               |                |      |              |             | Size | Offset |
| 20825 (2507.5) | 5 015.00   | 67.00                 | -7.40                         | 59.60          | V    | -35.60       | -25.00      | 1    | 38     |
|                | 7 522.50   | 56.88                 | -0.82                         | 56.06          | V    | -39.14       | -25.00      |      |        |
|                | 10 030.00  | 48.28                 | 4.66                          | 52.94          | V    | -42.26       | -25.00      |      |        |
|                | 12 537.50  | 47.76                 | 5.45                          | 53.21          | V    | -41.99       | -25.00      |      |        |
|                | 15 045.00  | 48.45                 | 8.76                          | 57.21          | V    | -37.99       | -25.00      |      |        |
| 21100 (2535.0) | 5 070.00   | 69.56                 | -7.19                         | 62.37          | V    | -32.83       | -25.00      | 1    | 38     |
|                | 7 605.00   | 57.84                 | -1.09                         | 56.75          | V    | -38.45       | -25.00      |      |        |
|                | 10 140.00  | 48.56                 | 3.99                          | 52.55          | V    | -42.65       | -25.00      |      |        |
|                | 12 675.00  | 46.70                 | 5.65                          | 52.35          | V    | -42.85       | -25.00      |      |        |
|                | 15 210.00  | 48.37                 | 7.18                          | 55.55          | V    | -39.65       | -25.00      |      |        |
| 21375 (2562.5) | 5 125.00   | 72.17                 | -7.06                         | 65.11          | V    | -30.09       | -25.00      | 1    | 0      |
|                | 7 687.50   | 57.95                 | -1.08                         | 56.87          | V    | -38.33       | -25.00      |      |        |
|                | 10 250.00  | 49.27                 | 5.04                          | 54.31          | V    | -40.89       | -25.00      |      |        |
|                | 12 812.50  | 47.45                 | 6.27                          | 53.72          | V    | -41.48       | -25.00      |      |        |
|                | 15 375.00  | 49.15                 | 6.31                          | 55.46          | V    | -39.74       | -25.00      |      |        |



- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch                | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|-------------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                   |            |                             |                               |                      |      |              |             | Size | Offset |
| 20850<br>(2510.0) | 5 020.00   | 68.79                       | -7.46                         | 61.33                | V    | -33.87       | -25.00      | 1    | 50     |
|                   | 7 530.00   | 56.93                       | -0.84                         | 56.09                | V    | -39.11       | -25.00      |      |        |
|                   | 10 040.00  | 48.35                       | 4.53                          | 52.88                | V    | -42.32       | -25.00      |      |        |
|                   | 12 550.00  | 46.82                       | 5.76                          | 52.58                | V    | -42.62       | -25.00      |      |        |
|                   | 15 060.00  | 48.11                       | 8.67                          | 56.78                | V    | -38.42       | -25.00      |      |        |
| 21100<br>(2535.0) | 5 070.00   | 67.69                       | -7.19                         | 60.50                | V    | -34.70       | -25.00      | 1    | 50     |
|                   | 7 605.00   | 56.71                       | -1.09                         | 55.62                | V    | -39.58       | -25.00      |      |        |
|                   | 10 140.00  | 48.97                       | 3.99                          | 52.96                | V    | -42.24       | -25.00      |      |        |
|                   | 12 675.00  | 46.79                       | 5.65                          | 52.44                | V    | -42.76       | -25.00      |      |        |
|                   | 15 210.00  | 47.79                       | 7.18                          | 54.97                | V    | -40.23       | -25.00      |      |        |
| 21350<br>(2560.0) | 5 120.00   | 72.84                       | -7.02                         | 65.82                | V    | -29.38       | -25.00      | 1    | 0      |
|                   | 7 680.00   | 58.75                       | -1.08                         | 57.67                | V    | -37.53       | -25.00      |      |        |
|                   | 10 240.00  | 48.75                       | 5.01                          | 53.76                | V    | -41.44       | -25.00      |      |        |
|                   | 12 800.00  | 47.36                       | 6.25                          | 53.61                | V    | -41.59       | -25.00      |      |        |
|                   | 15 360.00  | 48.78                       | 6.43                          | 55.21                | V    | -39.99       | -25.00      |      |        |

### 8.3.2 Internal Antenna

- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch             | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|----------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                |            |                             |                               |                      |      |              |             | Size | Offset |
| 20775 (2502.5) | 5 005.00   | 53.12                       | -7.44                         | 45.68                | H    | -49.52       | -25.00      | 1    | 0      |
|                | 7 507.50   | 50.17                       | -0.82                         | 49.35                | V    | -45.85       | -25.00      |      |        |
|                | 10 010.00  | 43.35                       | 4.79                          | 48.14                | H    | -47.06       | -25.00      |      |        |
| 21100 (2535.0) | 5 070.00   | 53.93                       | -7.19                         | 46.74                | V    | -48.46       | -25.00      | 1    | 0      |
|                | 7 605.00   | 51.46                       | -1.09                         | 50.37                | H    | -44.83       | -25.00      |      |        |
|                | 10 140.00  | 44.85                       | 3.99                          | 48.84                | V    | -46.36       | -25.00      |      |        |
| 21425 (2567.5) | 5 135.00   | 58.63                       | -7.11                         | 51.52                | H    | -43.68       | -25.00      | 1    | 0      |
|                | 7 702.50   | 47.24                       | -1.00                         | 46.24                | H    | -48.96       | -25.00      |      |        |
|                | 10 270.00  | 43.96                       | 5.29                          | 49.25                | V    | -45.95       | -25.00      |      |        |





- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch             | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|----------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                |            |                             |                               |                      |      |              |             | Size | Offset |
| 20800 (2505.0) | 5 010.00   | 54.89                       | -7.42                         | 47.47                | H    | -47.73       | -25.00      | 1    | 0      |
|                | 7 515.00   | 50.17                       | -0.83                         | 49.34                | V    | -45.86       | -25.00      |      |        |
|                | 10 020.00  | 43.47                       | 4.67                          | 48.14                | H    | -47.06       | -25.00      |      |        |
| 21100 (2535.0) | 5 070.00   | 54.22                       | -7.19                         | 47.03                | H    | -48.17       | -25.00      | 1    | 0      |
|                | 7 605.00   | 53.38                       | -1.09                         | 52.29                | V    | -42.91       | -25.00      |      |        |
|                | 10 140.00  | 45.03                       | 3.99                          | 49.02                | H    | -46.18       | -25.00      |      |        |
| 21400 (2565.0) | 5 130.00   | 58.04                       | -7.09                         | 50.95                | H    | -44.25       | -25.00      | 1    | 0      |
|                | 7 695.00   | 49.19                       | -1.00                         | 48.19                | H    | -47.01       | -25.00      |      |        |
|                | 10 260.00  | 46.01                       | 5.06                          | 51.07                | H    | -44.13       | -25.00      |      |        |



MODE: LTE B7  
 MODULATION SIGNAL: 15 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT: -25.00 dBm

| Ch             | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|----------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                |            |                             |                               |                      |      |              |             | Size | Offset |
| 20825 (2507.5) | 5 015.00   | 54.32                       | -7.40                         | 46.92                | H    | -48.28       | -25.00      | 1    | 0      |
|                | 7 522.50   | 50.47                       | -0.82                         | 49.65                | H    | -45.55       | -25.00      |      |        |
|                | 10 030.00  | 43.19                       | 4.66                          | 47.85                | H    | -47.35       | -25.00      |      |        |
| 21100 (2535.0) | 5 070.00   | 51.46                       | -7.19                         | 44.27                | H    | -50.93       | -25.00      | 1    | 0      |
|                | 7 605.00   | 53.78                       | -1.09                         | 52.69                | H    | -42.51       | -25.00      |      |        |
|                | 10 140.00  | 44.96                       | 3.99                          | 48.95                | V    | -46.25       | -25.00      |      |        |
| 21375 (2562.5) | 5 125.00   | 54.07                       | -7.06                         | 47.01                | V    | -48.19       | -25.00      | 1    | 0      |
|                | 7 687.50   | 50.63                       | -1.08                         | 49.55                | V    | -45.65       | -25.00      |      |        |
|                | 10 250.00  | 43.83                       | 5.04                          | 48.87                | H    | -46.33       | -25.00      |      |        |



MODE: LTE B7  
 MODULATION SIGNAL: 20 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT: -25.00 dBm

| Ch             | Freq (MHz) | Measured Level (dB $\mu$ V) | A.F+C.L+D.F+H.P.F -A.G (dB/m) | Total (dB $\mu$ V/m) | Pol. | Result (dBm) | Limit (dBm) | RB   |        |
|----------------|------------|-----------------------------|-------------------------------|----------------------|------|--------------|-------------|------|--------|
|                |            |                             |                               |                      |      |              |             | Size | Offset |
| 20850 (2510.0) | 5 020.00   | 56.22                       | -7.46                         | 48.76                | H    | -46.44       | -25.00      | 1    | 0      |
|                | 7 530.00   | 48.61                       | -0.84                         | 47.77                | H    | -47.43       | -25.00      |      |        |
|                | 10 040.00  | 44.36                       | 4.53                          | 48.89                | V    | -46.31       | -25.00      |      |        |
| 21100 (2535.0) | 5 070.00   | 50.41                       | -7.19                         | 43.22                | H    | -51.98       | -25.00      | 1    | 0      |
|                | 7 605.00   | 53.61                       | -1.09                         | 52.52                | H    | -42.68       | -25.00      |      |        |
|                | 10 140.00  | 46.33                       | 3.99                          | 50.32                | H    | -44.88       | -25.00      |      |        |
| 21350 (2560.0) | 5 120.00   | 51.68                       | -7.02                         | 44.66                | H    | -50.54       | -25.00      | 1    | 0      |
|                | 7 680.00   | 51.83                       | -1.08                         | 50.75                | H    | -44.45       | -25.00      |      |        |
|                | 10 240.00  | 44.47                       | 5.01                          | 49.48                | H    | -45.72       | -25.00      |      |        |

### 8.3.3 Inter Band ULCA

- ▣ MODE: 7A-5A
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.00 dBm

| Ch               | Freq.(MHz) | Measured        | A.F+C.L+ D.F-A.G<br>(dB/m) | Pol. | Total<br>(dBμV/m) | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------|------------|-----------------|----------------------------|------|-------------------|-----------------|----------------|----------------|
|                  |            | Level<br>(dBμV) |                            |      |                   |                 |                |                |
| 20450<br>(829.0) | 1 658.00   | 57.29           | -18.56                     | V    | 38.73             | -56.47          | -13.00         | 43.47          |
|                  | 2 487.00   | 60.91           | -15.05                     | V    | 45.86             | -49.34          | -13.00         | 36.34          |
|                  | 3 316.00   | 56.58           | -13.43                     | H    | 43.15             | -52.05          | -13.00         | 39.05          |
|                  | 4 145.00   | 58.54           | -11.02                     | H    | 47.52             | -47.68          | -13.00         | 34.68          |

- ▣ MODE: 7A-5A
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -25.00 dBm

| Ch                | Freq.(MHz) | Measured        | A.F+C.L+ D.F-A.G<br>(dB/m) | Pol. | Total<br>(dBμV/m) | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-------------------|------------|-----------------|----------------------------|------|-------------------|-----------------|----------------|----------------|
|                   |            | Level<br>(dBμV) |                            |      |                   |                 |                |                |
| 21375<br>(2562.5) | 5 125.00   | 71.75           | -7.06                      | H    | 64.69             | -30.51          | -25.00         | 5.51           |
|                   | 7 687.50   | 52.05           | -1.08                      | H    | 50.97             | -44.23          | -25.00         | 19.23          |
|                   | 10 250.00  | 45.44           | 5.04                       | H    | 50.48             | -44.72          | -25.00         | 19.72          |

### 8.4 PEAK-TO-AVERAGE RATIO

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data ( dB ) |
|------|------------|-----------------|------------|---------------------|-----------------------|-------------|
| 7    | 5 MHz      | 2535.0          | QPSK       | 25                  | 0                     | 5.29        |
|      |            |                 | 16-QAM     |                     |                       | 6.02        |
|      |            |                 | 64-QAM     |                     |                       | 6.62        |
|      |            |                 | 256-QAM    |                     |                       | 6.62        |
|      | 10 MHz     |                 | QPSK       | 50                  |                       | 5.29        |
|      |            |                 | 16-QAM     |                     |                       | 6.01        |
|      |            |                 | 64-QAM     |                     |                       | 6.56        |
|      |            |                 | 256-QAM    |                     |                       | 6.61        |
|      | 15 MHz     |                 | QPSK       | 75                  |                       | 5.26        |
|      |            |                 | 16-QAM     |                     |                       | 5.97        |
|      |            |                 | 64-QAM     |                     |                       | 6.56        |
|      |            |                 | 256-QAM    |                     |                       | 6.63        |
|      | 20 MHz     |                 | QPSK       | 100                 |                       | 5.17        |
|      |            |                 | 16-QAM     |                     |                       | 5.94        |
|      |            |                 | 64-QAM     |                     |                       | 6.52        |
|      |            |                 | 256-QAM    |                     |                       | 6.57        |

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 102 ~ 117.

### 8.5 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data ( MHz ) |
|------|------------|-----------------|------------|---------------------|-----------------------|--------------|
| 7    | 5 MHz      | 2535.0          | QPSK       | 25                  | 0                     | 4.5008       |
|      |            |                 | 16-QAM     |                     |                       | 4.5163       |
|      |            |                 | 64-QAM     |                     |                       | 4.5101       |
|      |            |                 | 256-QAM    |                     |                       | 4.5018       |
|      | 10 MHz     |                 | QPSK       | 50                  |                       | 8.9595       |
|      |            |                 | 16-QAM     |                     |                       | 8.9936       |
|      |            |                 | 64-QAM     |                     |                       | 8.9579       |
|      |            |                 | 256-QAM    |                     |                       | 8.9808       |
|      | 15 MHz     |                 | QPSK       | 75                  |                       | 13.461       |
|      |            |                 | 16-QAM     |                     |                       | 13.457       |
|      |            |                 | 64-QAM     |                     |                       | 13.471       |
|      |            |                 | 256-QAM    |                     |                       | 13.486       |
|      | 20 MHz     |                 | QPSK       | 100                 |                       | 17.915       |
|      |            |                 | 16-QAM     |                     |                       | 17.925       |
|      |            |                 | 64-QAM     |                     |                       | 17.940       |
|      |            |                 | 256-QAM    |                     |                       | 17.935       |

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 86 ~ 101.

### 8.6 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 7    | 5                | 2502.5          | 26.1823                             | 30.131      | -76.816                        | -46.685      | -25.00      |
|      |                  | 2535.0          | 26.1632                             | 30.131      | -76.432                        | -46.301      |             |
|      |                  | 2567.5          | 26.1321                             | 30.131      | -76.806                        | -46.675      |             |
|      | 10               | 2505.0          | 26.1695                             | 30.131      | -76.807                        | -46.676      |             |
|      |                  | 2535.0          | 26.1266                             | 30.131      | -76.752                        | -46.621      |             |
|      |                  | 2565.0          | 25.7849                             | 30.131      | -76.871                        | -46.740      |             |
|      | 15               | 2507.5          | 26.1487                             | 30.131      | -76.826                        | -46.695      |             |
|      |                  | 2535.0          | 26.1984                             | 30.131      | -76.998                        | -46.867      |             |
|      |                  | 2562.5          | 3.7114                              | 27.976      | -76.590                        | -48.614      |             |
|      | 20               | 2510.0          | 26.1610                             | 30.131      | -76.653                        | -46.522      |             |
|      |                  | 2535.0          | 26.1462                             | 30.131      | -76.817                        | -46.686      |             |
|      |                  | 2560.0          | 26.2418                             | 30.131      | -76.710                        | -46.579      |             |

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 118 ~ 141.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1              | 25.270      |
| 1 – 5                 | 27.976      |
| 5 – 10                | 28.591      |
| 10 – 15               | 29.116      |
| 15 – 20               | 29.489      |
| Above 20(26.5)        | 30.131      |

### 8.7 CHANNEL EDGE

| Band Width<br>(Modulation) | Frequency<br>(MHz) | RB<br>Size /<br>Offset | C.E ~ (C.E ± 1<br>MHz) |        | 2 496<br>MHz<br>~<br>2 499<br>MHz | (C.E + 1<br>MHz)<br>~<br>(C.E + 5<br>MHz) | 2 490.5<br>MHz<br>~<br>2 496<br>MHz | (C.E + 5<br>MHz)<br>~<br>(C.E + X<br>MHz) | Below<br>2 490.5<br>MHz | Above<br>(C.E + X<br>MHz) |
|----------------------------|--------------------|------------------------|------------------------|--------|-----------------------------------|-------------------------------------------|-------------------------------------|-------------------------------------------|-------------------------|---------------------------|
|                            |                    |                        | Lower                  | Upper  | Lower                             | Upper                                     | Lower                               | Upper                                     | Lower                   | Upper                     |
| 5 MHz                      | 2502.5             | 25 / 0                 | -27.00                 | -26.59 | -23.95                            | -23.84                                    | -31.34                              | -36.86                                    | -40.62                  | -38.00                    |
| 10 MHz                     | 2505.0             | 50 / 0                 | -29.03                 | -28.26 | -25.61                            | -25.34                                    | -27.96                              | -28.22                                    | -37.10                  | -38.28                    |
| 15 MHz                     | 2507.5             | 75 / 0                 | -31.38                 | -28.73 | -30.58                            | -26.79                                    | -30.84                              | -28.73                                    | -33.67                  | -38.01                    |
| 20 MHz                     | 2510.0             | 100 / 0 0              | -30.38                 | -29.14 | -30.26                            | -28.21                                    | -30.87                              | -29.46                                    | -32.24                  | -38.29                    |
| Limit                      |                    |                        | -10.0                  |        | -10.0                             |                                           | -13.0                               |                                           | -25.0                   |                           |

| Band Width<br>(Modulation) | Frequency<br>(MHz) | RB<br>Size / Offset | C.E ~ (C.E ± 1 MHz) |        | (C.E ± 1 MHz)<br>~<br>(C.E ± 5 MHz) |        |
|----------------------------|--------------------|---------------------|---------------------|--------|-------------------------------------|--------|
|                            |                    |                     | Lower               | Upper  | Lower                               | Upper  |
| 5 MHz<br>(QPSK)            | 2535.0             | 25 / 0              | -28.99              | -28.45 | -29.80                              | -30.01 |
|                            | 2567.5             | 25 / 0              | -28.28              | -27.65 | -27.49                              | -27.11 |
| 10 MHz<br>(QPSK)           | 2535.0             | 50 / 0              | -30.49              | -30.86 | -28.25                              | -31.06 |
|                            | 2565.0             | 50 / 0              | -28.97              | -28.68 | -27.02                              | -26.23 |
| 15 MHz<br>(QPSK)           | 2535.0             | 75 / 0              | -31.21              | -31.81 | -29.70                              | -32.56 |
|                            | 2562.5             | 75 / 0              | -28.93              | -29.16 | -28.03                              | -27.33 |
| 20 MHz<br>(QPSK)           | 2535.0             | 100 / 0             | -29.28              | -31.10 | -27.91                              | -31.38 |
|                            | 2560.0             | 100 / 0             | -28.02              | -27.12 | -27.29                              | -25.19 |
| Limit                      |                    |                     | -10.0               |        | -10.0                               |        |

| Band Width<br>(Modulation) | Frequency<br>(MHz) | Resource Block<br>Size | (C.E ± 5 MHz)<br>~<br>(C.E ± X MHz) |        | Above<br>(C.E ± X MHz) |        |
|----------------------------|--------------------|------------------------|-------------------------------------|--------|------------------------|--------|
|                            |                    |                        | Lower                               | Upper  | Lower                  | Upper  |
| 5 MHz<br>(QPSK)            | 2535.0             | 25 / 0                 | -37.31                              | -38.79 | -38.62                 | -38.73 |
|                            | 2567.5             | 25 / 0                 | -35.41                              | -36.32 | -36.82                 | -37.83 |
| 10 MHz<br>(QPSK)           | 2535.0             | 50 / 0                 | -31.78                              | -34.91 | -39.65                 | -39.47 |
|                            | 2565.0             | 50 / 0                 | -32.95                              | -29.35 | -37.95                 | -37.78 |
| 15 MHz<br>(QPSK)           | 2535.0             | 75 / 0                 | -32.89                              | -34.20 | -42.41                 | -42.19 |
|                            | 2562.5             | 75 / 0                 | -30.99                              | -29.86 | -40.39                 | -40.22 |
| 20 MHz<br>(QPSK)           | 2535.0             | 100 / 0                | -30.46                              | -33.33 | -43.15                 | -42.66 |
|                            | 2560.0             | 100 / 0                | -30.44                              | -28.05 | -40.04                 | -42.87 |
| Limit                      |                    |                        | -13.0                               |        | -25.0                  |        |

**Note:**


1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 62 ~ 85.



### 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,502,500,000 Hz
- ▣ CHANNEL: 20775 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm       |
|-------------|-------------|------------|----------------|----------------------|---------------|-----------|
| 100%        | 13.500      | +20(Ref)   | 2502 500 006   | 0.0                  | 0.000 000     | 0.000     |
| 100%        |             | -30        | 2502 500 011   | 4.9                  | 0.000 000     | 0.002     |
| 100%        |             | -20        | 2502 500 010   | 4.0                  | 0.000 000     | 0.002     |
| 100%        |             | -10        | 2502 500 012   | 5.2                  | 0.000 000     | 0.002     |
| 100%        |             | 0          | 2502 500 014   | 7.8                  | 0.000 000     | 0.003     |
| 100%        |             | +10        | 2502 500 020   | 13.6                 | 0.000 001     | 0.005     |
| 100%        |             | +30        | 2502 499 997   | -9.5                 | 0.000 000     | -0.004    |
| 100%        |             | +40        | 2502 500 015   | 8.6                  | 0.000 000     | 0.003     |
| 100%        |             | +50        | 2502 500 014   | 7.4                  | 0.000 000     | 0.003     |
| 85%         |             | 11.475     | +20            | 2502 500 013         | 6.5           | 0.000 000 |
| 115%        | 15.525      | +20        | 2502 500 020   | 13.3                 | 0.000 001     | 0.005     |

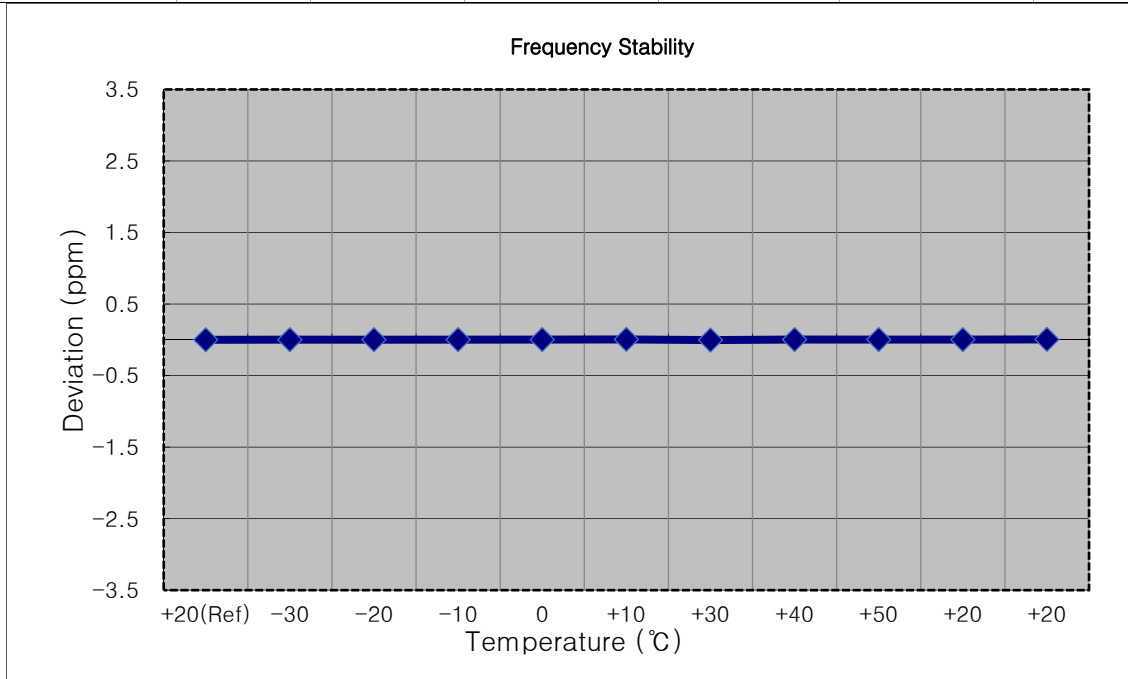



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,505,000,000 Hz
- ▣ CHANNEL: 20800 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm   |
|-------------|-------------|------------|----------------|----------------------|---------------|-------|
| 100%        | 13.500      | +20(Ref)   | 2504 999 994   | 0.0                  | 0.000 000     | 0.000 |
| 100%        |             | -30        | 2505 000 004   | 10.4                 | 0.000 000     | 0.004 |
| 100%        |             | -20        | 2505 000 004   | 10.1                 | 0.000 000     | 0.004 |
| 100%        |             | -10        | 2505 000 001   | 7.4                  | 0.000 000     | 0.003 |
| 100%        |             | 0          | 2505 000 001   | 7.9                  | 0.000 000     | 0.003 |
| 100%        |             | +10        | 2505 000 004   | 10.0                 | 0.000 000     | 0.004 |
| 100%        |             | +30        | 2505 000 006   | 12.3                 | 0.000 000     | 0.005 |
| 100%        |             | +40        | 2505 000 010   | 16.4                 | 0.000 001     | 0.007 |
| 100%        |             | +50        | 2505 000 004   | 10.5                 | 0.000 000     | 0.004 |
| 85%         | 11.475      | +20        | 2505 000 005   | 11.3                 | 0.000 000     | 0.005 |
| 115%        | 15.525      | +20        | 2505 000 006   | 12.2                 | 0.000 000     | 0.005 |

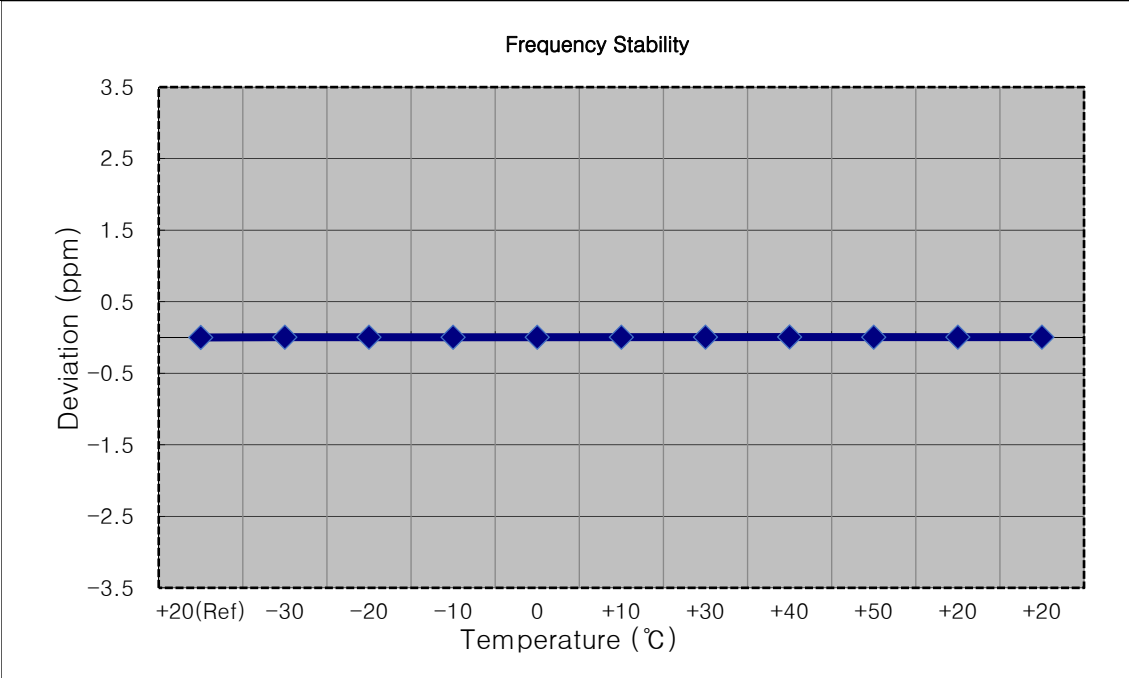



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,507,500,000 Hz
- ▣ CHANNEL: 20825 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2507 499 995   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2507 500 000   | 5.4                  | 0.000 000     | 0.002  |
| 100%        |             | -20        | 2507 500 006   | 11.5                 | 0.000 000     | 0.005  |
| 100%        |             | -10        | 2507 500 001   | 5.8                  | 0.000 000     | 0.002  |
| 100%        |             | 0          | 2507 500 006   | 10.9                 | 0.000 000     | 0.004  |
| 100%        |             | +10        | 2507 499 990   | -4.8                 | 0.000 000     | -0.002 |
| 100%        |             | +30        | 2507 500 007   | 11.7                 | 0.000 000     | 0.005  |
| 100%        |             | +40        | 2507 499 988   | -7.3                 | 0.000 000     | -0.003 |
| 100%        |             | +50        | 2507 499 998   | 3.6                  | 0.000 000     | 0.001  |
| 85%         | 11.475      | +20        | 2507 500 001   | 5.9                  | 0.000 000     | 0.002  |
| 115%        | 15.525      | +20        | 2507 500 006   | 11.6                 | 0.000 000     | 0.005  |

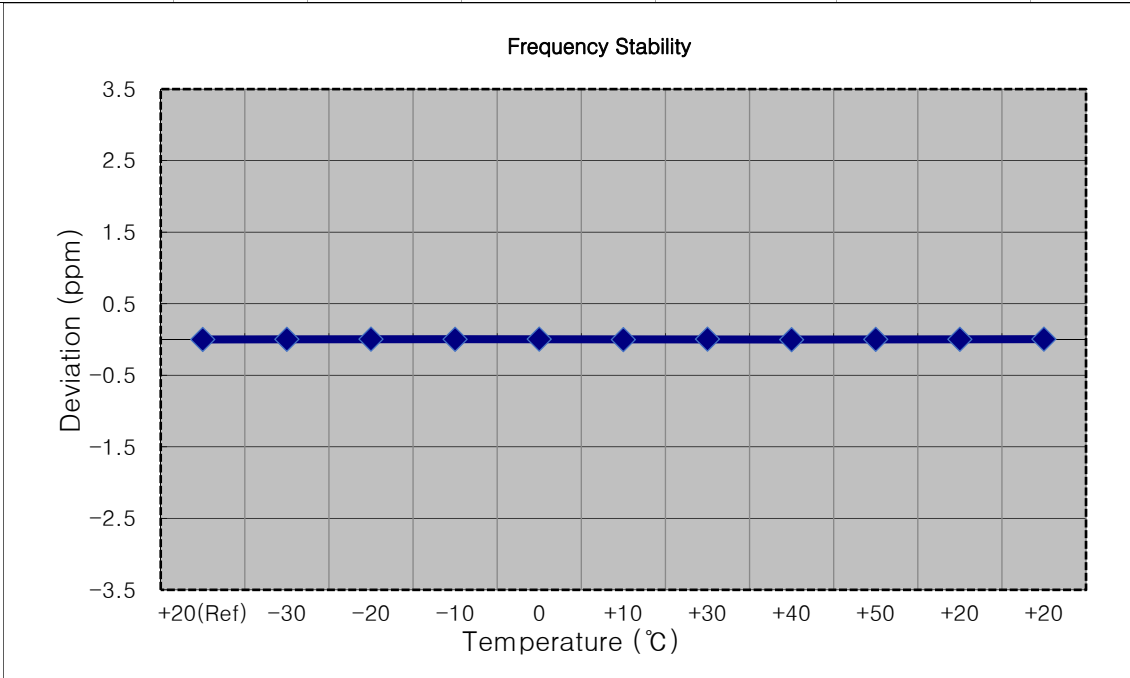



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,510,000,000 Hz
- ▣ CHANNEL: 20850 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2509 999 991   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2509 999 975   | -15.6                | -0.000 001    | -0.006 |
| 100%        |             | -20        | 2509 999 998   | 7.8                  | 0.000 000     | 0.003  |
| 100%        |             | -10        | 2509 999 981   | -9.8                 | 0.000 000     | -0.004 |
| 100%        |             | 0          | 2509 999 972   | -18.1                | -0.000 001    | -0.007 |
| 100%        |             | +10        | 2509 999 983   | -7.2                 | 0.000 000     | -0.003 |
| 100%        |             | +30        | 2509 999 981   | -9.8                 | 0.000 000     | -0.004 |
| 100%        |             | +40        | 2509 999 969   | -21.8                | -0.000 001    | -0.009 |
| 100%        |             | +50        | 2509 999 983   | -7.7                 | 0.000 000     | -0.003 |
| 85%         | 11.475      | +20        | 2509 999 982   | -8.9                 | 0.000 000     | -0.004 |
| 115%        | 15.525      | +20        | 2509 999 977   | -13.6                | -0.000 001    | -0.005 |

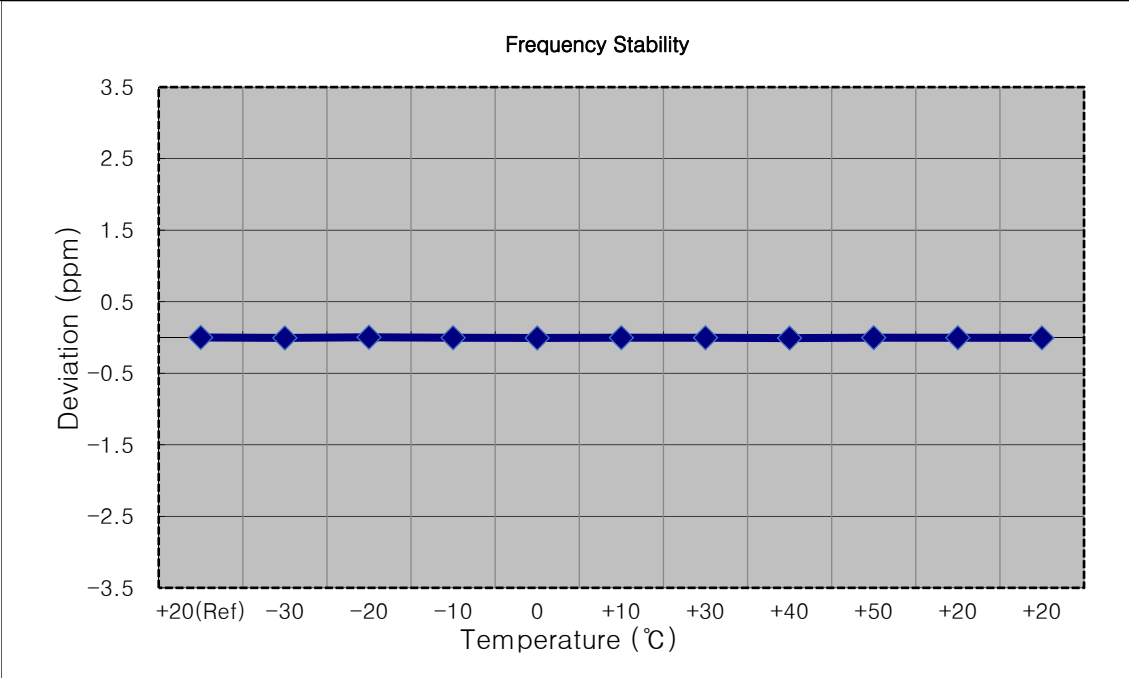



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2535 000 009   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2535 000 028   | 19.1                 | 0.000 001     | 0.008  |
| 100%        |             | -20        | 2535 000 024   | 15.1                 | 0.000 001     | 0.006  |
| 100%        |             | -10        | 2535 000 023   | 14.3                 | 0.000 001     | 0.006  |
| 100%        |             | 0          | 2535 000 016   | 6.5                  | 0.000 000     | 0.003  |
| 100%        |             | +10        | 2535 000 013   | 4.1                  | 0.000 000     | 0.002  |
| 100%        |             | +30        | 2535 000 016   | 7.0                  | 0.000 000     | 0.003  |
| 100%        |             | +40        | 2535 000 021   | 11.8                 | 0.000 000     | 0.005  |
| 100%        |             | +50        | 2534 999 999   | -9.9                 | 0.000 000     | -0.004 |
| 85%         | 11.475      | +20        | 2535 000 003   | -5.6                 | 0.000 000     | -0.002 |
| 115%        | 15.525      | +20        | 2535 000 019   | 9.5                  | 0.000 000     | 0.004  |

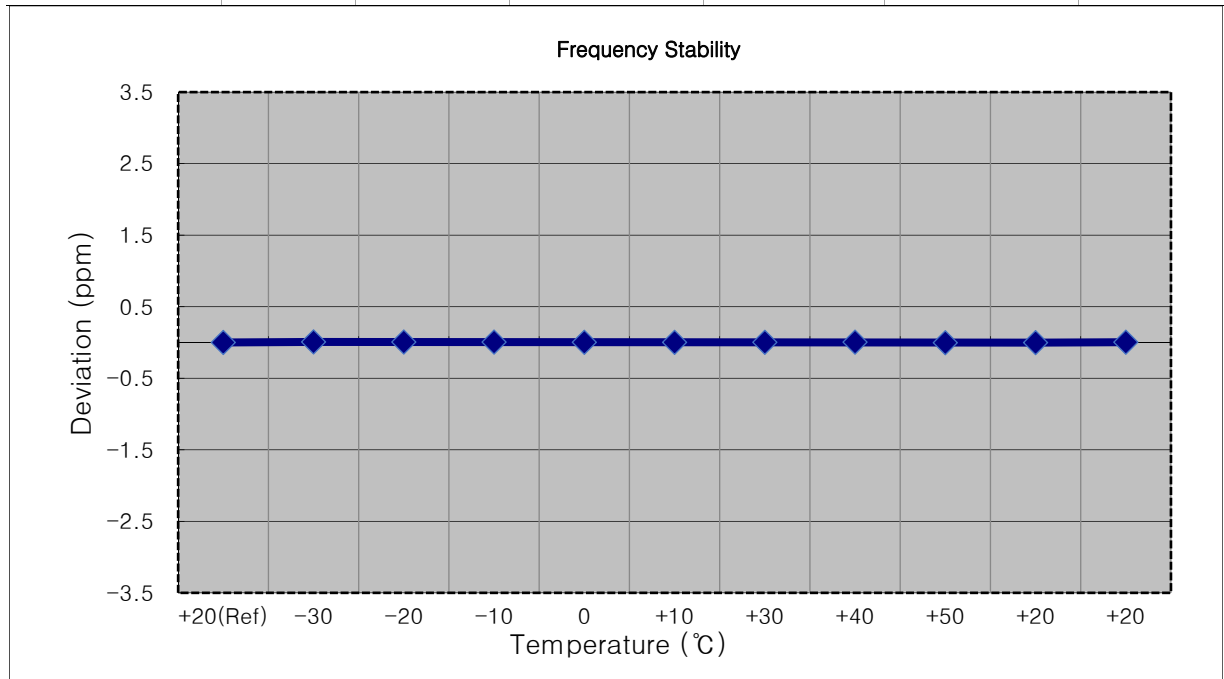



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2535 000 003   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2535 000 009   | 5.9                  | 0.000 000     | 0.002  |
| 100%        |             | -20        | 2535 000 012   | 8.8                  | 0.000 000     | 0.003  |
| 100%        |             | -10        | 2535 000 015   | 12.0                 | 0.000 000     | 0.005  |
| 100%        |             | 0          | 2534 999 997   | -6.6                 | 0.000 000     | -0.003 |
| 100%        |             | +10        | 2535 000 009   | 6.0                  | 0.000 000     | 0.002  |
| 100%        |             | +30        | 2535 000 007   | 3.1                  | 0.000 000     | 0.001  |
| 100%        |             | +40        | 2535 000 012   | 8.1                  | 0.000 000     | 0.003  |
| 100%        |             | +50        | 2535 000 021   | 17.2                 | 0.000 001     | 0.007  |
| 85%         | 11.475      | +20        | 2535 000 013   | 9.1                  | 0.000 000     | 0.004  |
| 115%        | 15.525      | +20        | 2534 999 997   | -6.7                 | 0.000 000     | -0.003 |

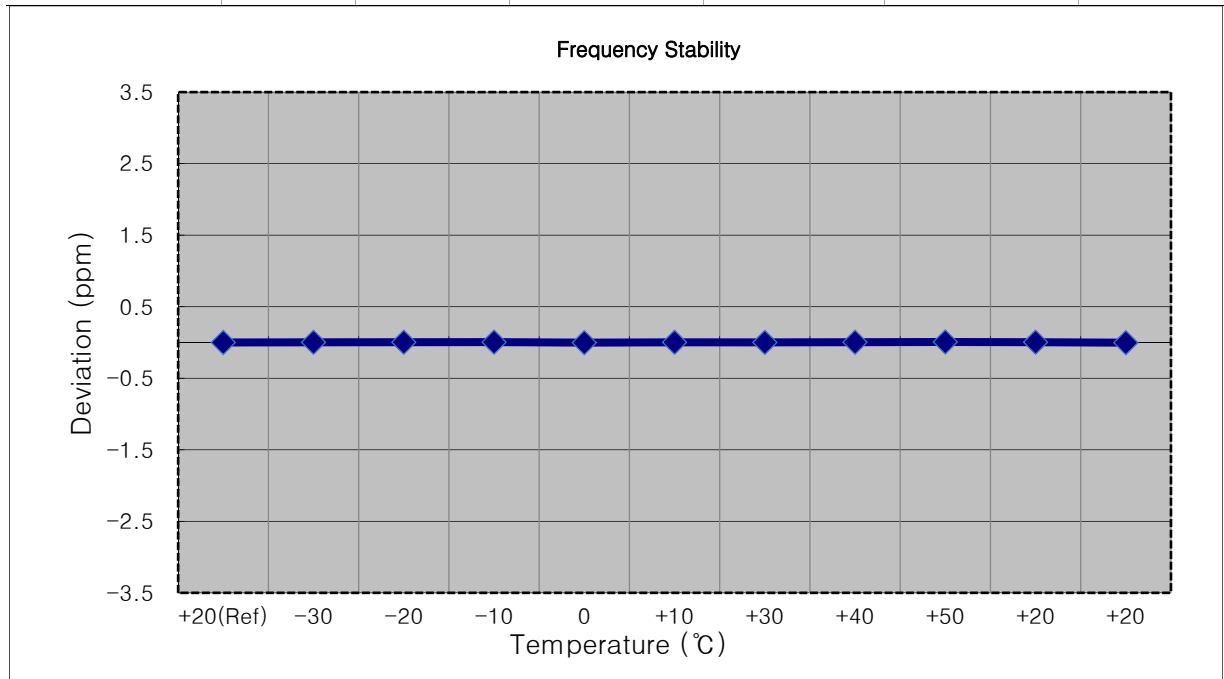



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2535 000 007   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2534 999 999   | -8.3                 | 0.000 000     | -0.003 |
| 100%        |             | -20        | 2535 000 012   | 5.3                  | 0.000 000     | 0.002  |
| 100%        |             | -10        | 2534 999 999   | -7.4                 | 0.000 000     | -0.003 |
| 100%        |             | 0          | 2535 000 013   | 5.7                  | 0.000 000     | 0.002  |
| 100%        |             | +10        | 2535 000 023   | 16.1                 | 0.000 001     | 0.006  |
| 100%        |             | +30        | 2535 000 012   | 5.3                  | 0.000 000     | 0.002  |
| 100%        |             | +40        | 2535 000 024   | 16.7                 | 0.000 001     | 0.007  |
| 100%        |             | +50        | 2535 000 013   | 5.7                  | 0.000 000     | 0.002  |
| 85%         | 11.475      | +20        | 2535 000 014   | 6.7                  | 0.000 000     | 0.003  |
| 115%        | 15.525      | +20        | 2535 000 001   | -5.8                 | 0.000 000     | -0.002 |

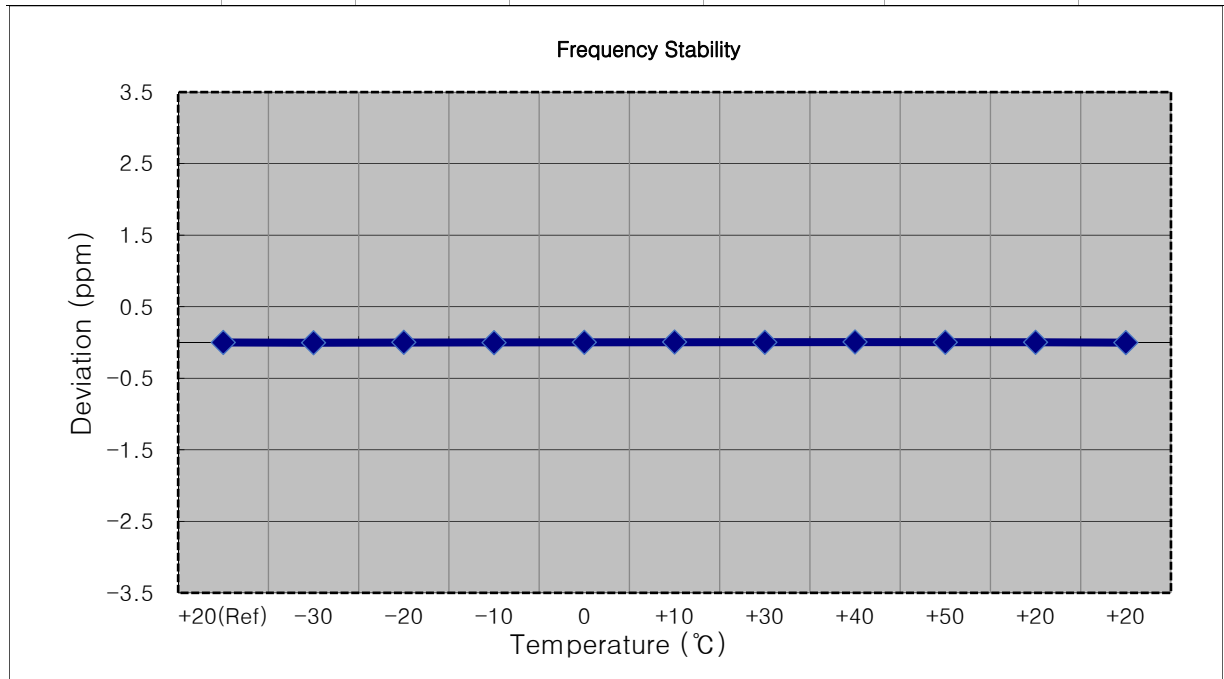



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2535 000 017   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2535 000 028   | 10.8                 | 0.000 000     | 0.004  |
| 100%        |             | -20        | 2535 000 012   | -5.0                 | 0.000 000     | -0.002 |
| 100%        |             | -10        | 2535 000 025   | 8.4                  | 0.000 000     | 0.003  |
| 100%        |             | 0          | 2535 000 014   | -3.4                 | 0.000 000     | -0.001 |
| 100%        |             | +10        | 2535 000 009   | -8.3                 | 0.000 000     | -0.003 |
| 100%        |             | +30        | 2535 000 024   | 7.2                  | 0.000 000     | 0.003  |
| 100%        |             | +40        | 2535 000 025   | 8.4                  | 0.000 000     | 0.003  |
| 100%        |             | +50        | 2535 000 009   | -7.7                 | 0.000 000     | -0.003 |
| 85%         | 11.475      | +20        | 2535 000 024   | 6.9                  | 0.000 000     | 0.003  |
| 115%        | 15.525      | +20        | 2535 000 028   | 11.0                 | 0.000 000     | 0.004  |

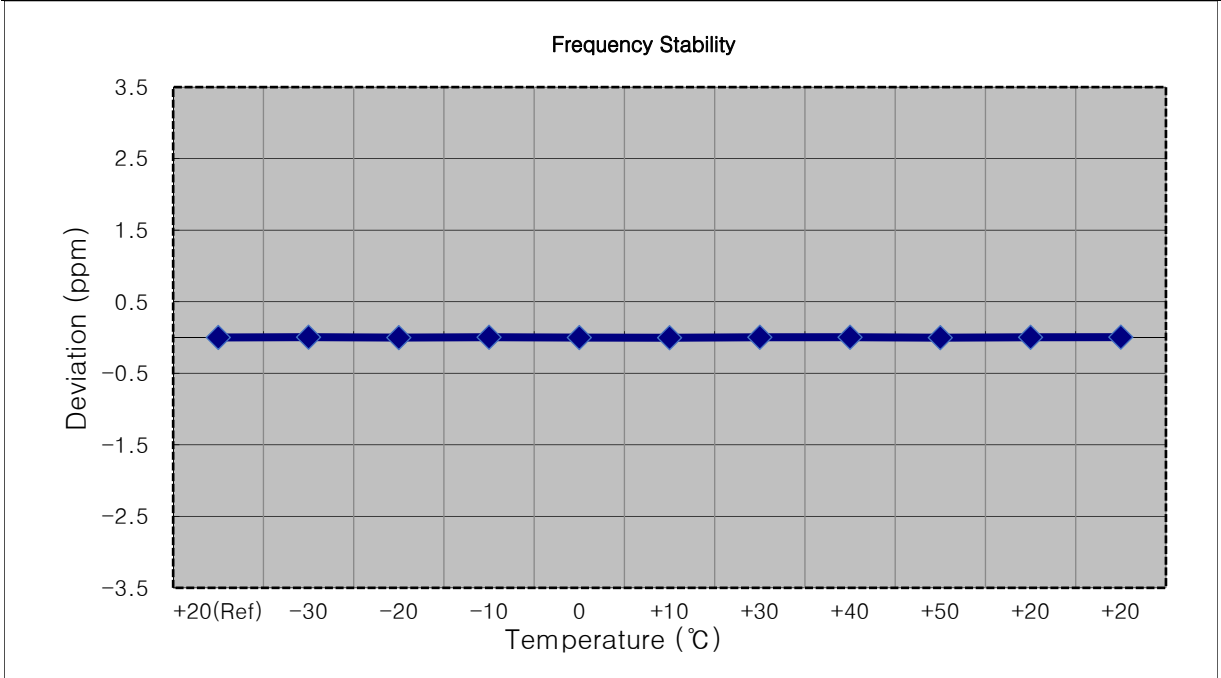






- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,567,500,000 Hz
- ▣ CHANNEL: 21425 (5 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2567 499 976   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2567 499 953   | -23.0                | -0.000 001    | -0.009 |
| 100%        |             | -20        | 2567 499 955   | -21.4                | -0.000 001    | -0.008 |
| 100%        |             | -10        | 2567 499 956   | -19.7                | -0.000 001    | -0.008 |
| 100%        |             | 0          | 2567 499 958   | -17.5                | -0.000 001    | -0.007 |
| 100%        |             | +10        | 2567 499 961   | -15.2                | -0.000 001    | -0.006 |
| 100%        |             | +30        | 2567 499 965   | -10.8                | 0.000 000     | -0.004 |
| 100%        |             | +40        | 2567 499 953   | -23.3                | -0.000 001    | -0.009 |
| 100%        |             | +50        | 2567 499 957   | -19.4                | -0.000 001    | -0.008 |
| 85%         | 11.475      | +20        | 2567 499 961   | -15.3                | -0.000 001    | -0.006 |
| 115%        | 15.525      | +20        | 2567 499 959   | -17.2                | -0.000 001    | -0.007 |

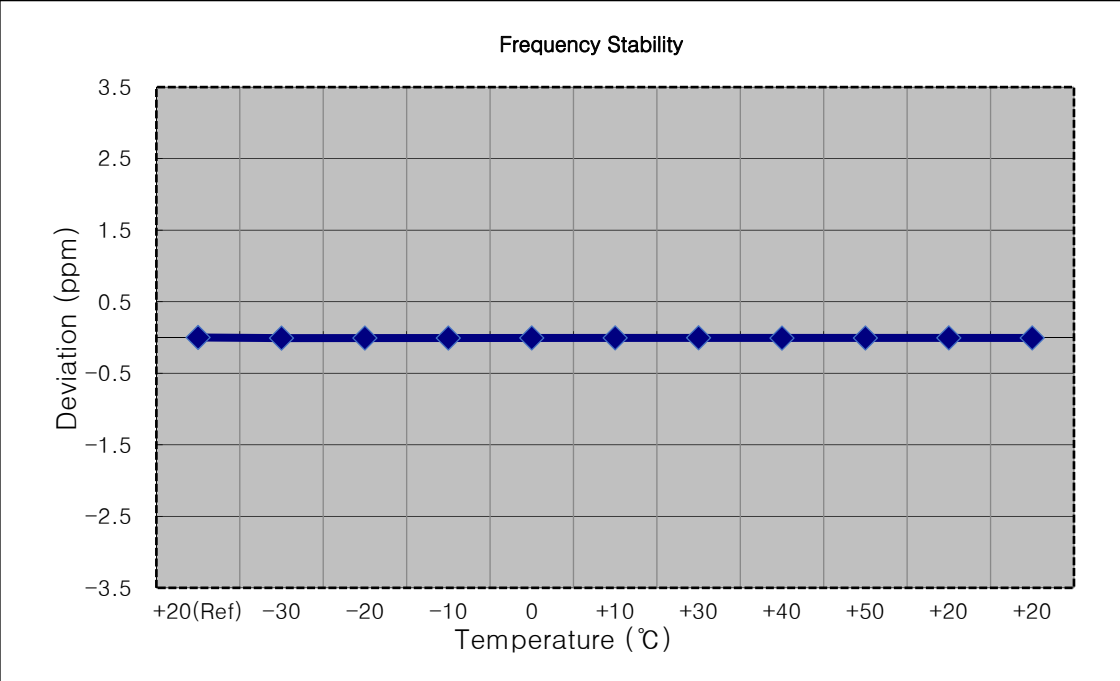



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,565,000,000 Hz
- ▣ CHANNEL: 21400 (10 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2565 000 003   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2564 999 998   | -5.7                 | 0.000 000     | -0.002 |
| 100%        |             | -20        | 2564 999 994   | -9.0                 | 0.000 000     | -0.004 |
| 100%        |             | -10        | 2564 999 992   | -11.4                | 0.000 000     | -0.004 |
| 100%        |             | 0          | 2564 999 989   | -14.4                | -0.000 001    | -0.006 |
| 100%        |             | +10        | 2564 999 986   | -17.5                | -0.000 001    | -0.007 |
| 100%        |             | +30        | 2565 000 005   | 1.8                  | 0.000 000     | 0.001  |
| 100%        |             | +40        | 2565 000 013   | 9.7                  | 0.000 000     | 0.004  |
| 100%        |             | +50        | 2565 000 001   | -2.9                 | 0.000 000     | -0.001 |
| 85%         | 11.475      | +20        | 2565 000 008   | 4.6                  | 0.000 000     | 0.002  |
| 115%        | 15.525      | +20        | 2565 000 013   | 9.7                  | 0.000 000     | 0.004  |

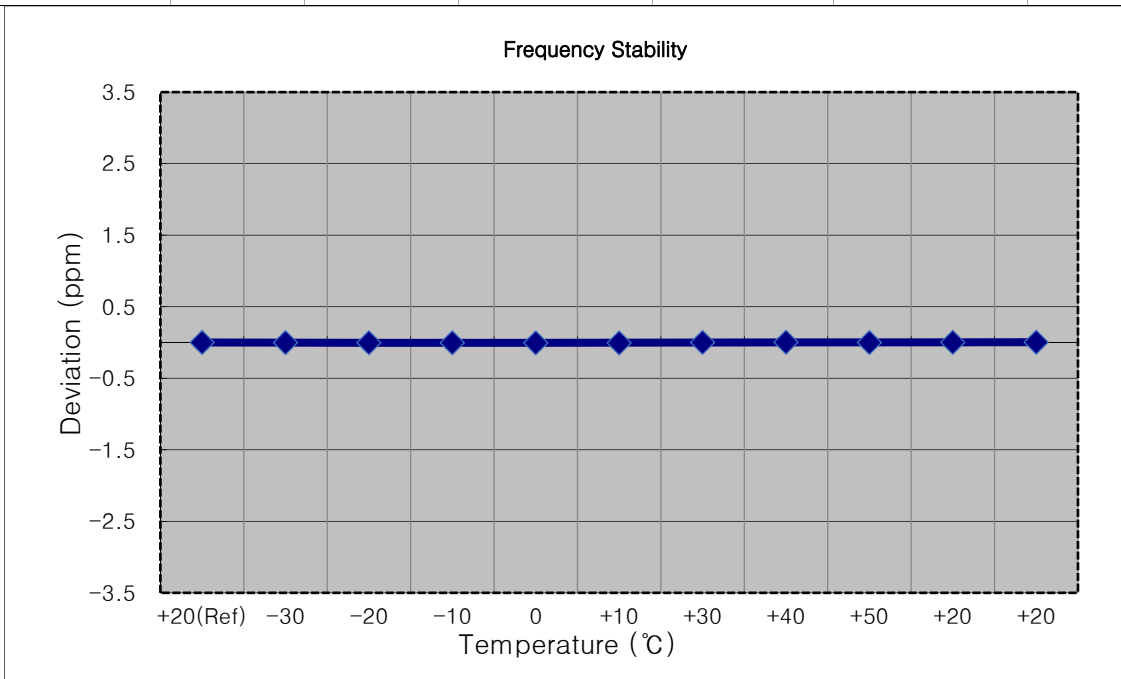



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,562,500,000 Hz
- ▣ CHANNEL: 21375 (15 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2562 500 004   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2562 500 011   | 7.3                  | 0.000 000     | 0.003  |
| 100%        |             | -20        | 2562 499 991   | -13.1                | -0.000 001    | -0.005 |
| 100%        |             | -10        | 2562 499 994   | -9.9                 | 0.000 000     | -0.004 |
| 100%        |             | 0          | 2562 499 998   | -5.9                 | 0.000 000     | -0.002 |
| 100%        |             | +10        | 2562 500 001   | -3.5                 | 0.000 000     | -0.001 |
| 100%        |             | +30        | 2562 499 988   | -16.5                | -0.000 001    | -0.006 |
| 100%        |             | +40        | 2562 499 992   | -11.8                | 0.000 000     | -0.005 |
| 100%        |             | +50        | 2562 500 010   | 5.9                  | 0.000 000     | 0.002  |
| 85%         | 11.475      | +20        | 2562 500 012   | 8.1                  | 0.000 000     | 0.003  |
| 115%        | 15.525      | +20        | 2562 500 009   | 5.1                  | 0.000 000     | 0.002  |

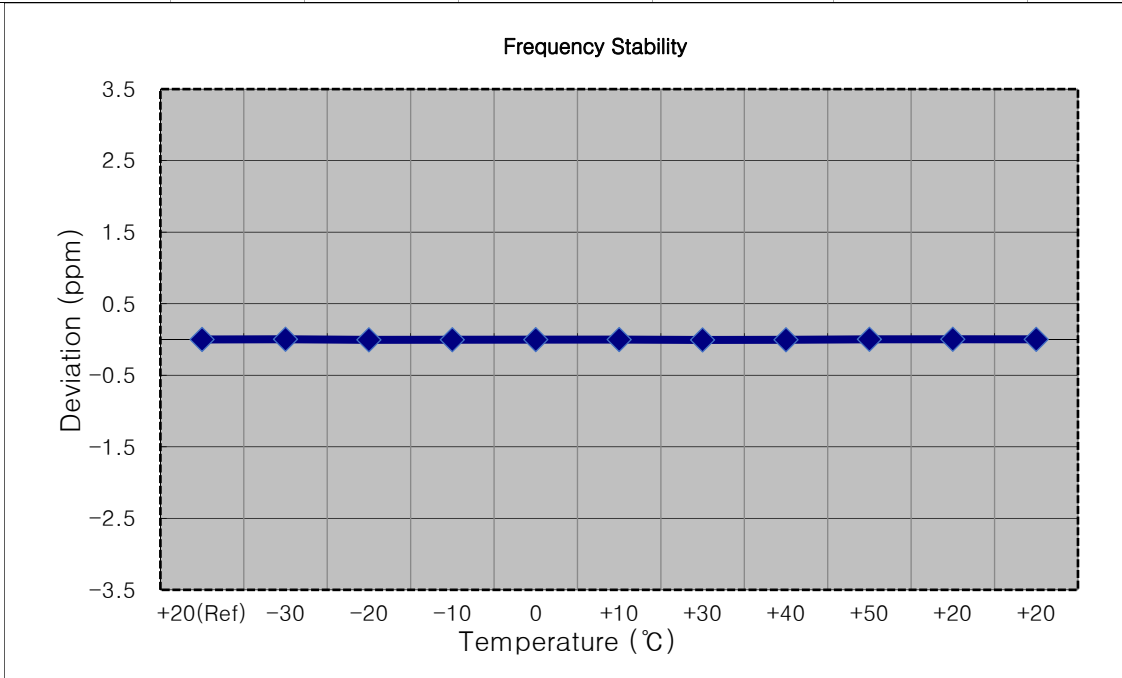



- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,560,000,000 Hz
- ▣ CHANNEL: 21350 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%        | 13.500      | +20(Ref)   | 2559 999 983   | 0.0                  | 0.000 000     | 0.000  |
| 100%        |             | -30        | 2559 999 971   | -11.7                | 0.000 000     | -0.005 |
| 100%        |             | -20        | 2559 999 977   | -5.3                 | 0.000 000     | -0.002 |
| 100%        |             | -10        | 2559 999 988   | 4.8                  | 0.000 000     | 0.002  |
| 100%        |             | 0          | 2559 999 973   | -9.8                 | 0.000 000     | -0.004 |
| 100%        |             | +10        | 2559 999 979   | -3.8                 | 0.000 000     | -0.001 |
| 100%        |             | +30        | 2559 999 970   | -12.8                | -0.000 001    | -0.005 |
| 100%        |             | +40        | 2559 999 976   | -7.1                 | 0.000 000     | -0.003 |
| 100%        |             | +50        | 2559 999 990   | 7.1                  | 0.000 000     | 0.003  |
| 85%         | 11.475      | +20        | 2559 999 990   | 7.4                  | 0.000 000     | 0.003  |
| 115%        | 15.525      | +20        | 2559 999 975   | -7.7                 | 0.000 000     | -0.003 |

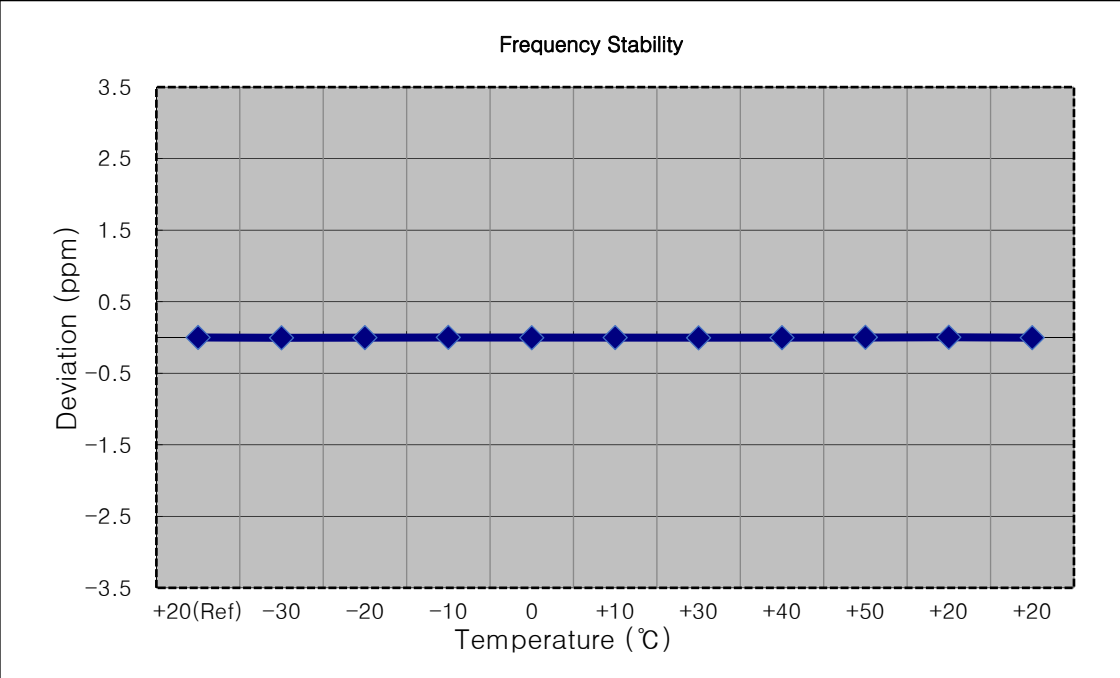



9. TEST PLOTS

LTE7\_5 M\_BandEdge\_Lower\_Low\_2502.5 MHz\_QPSK\_FullRB

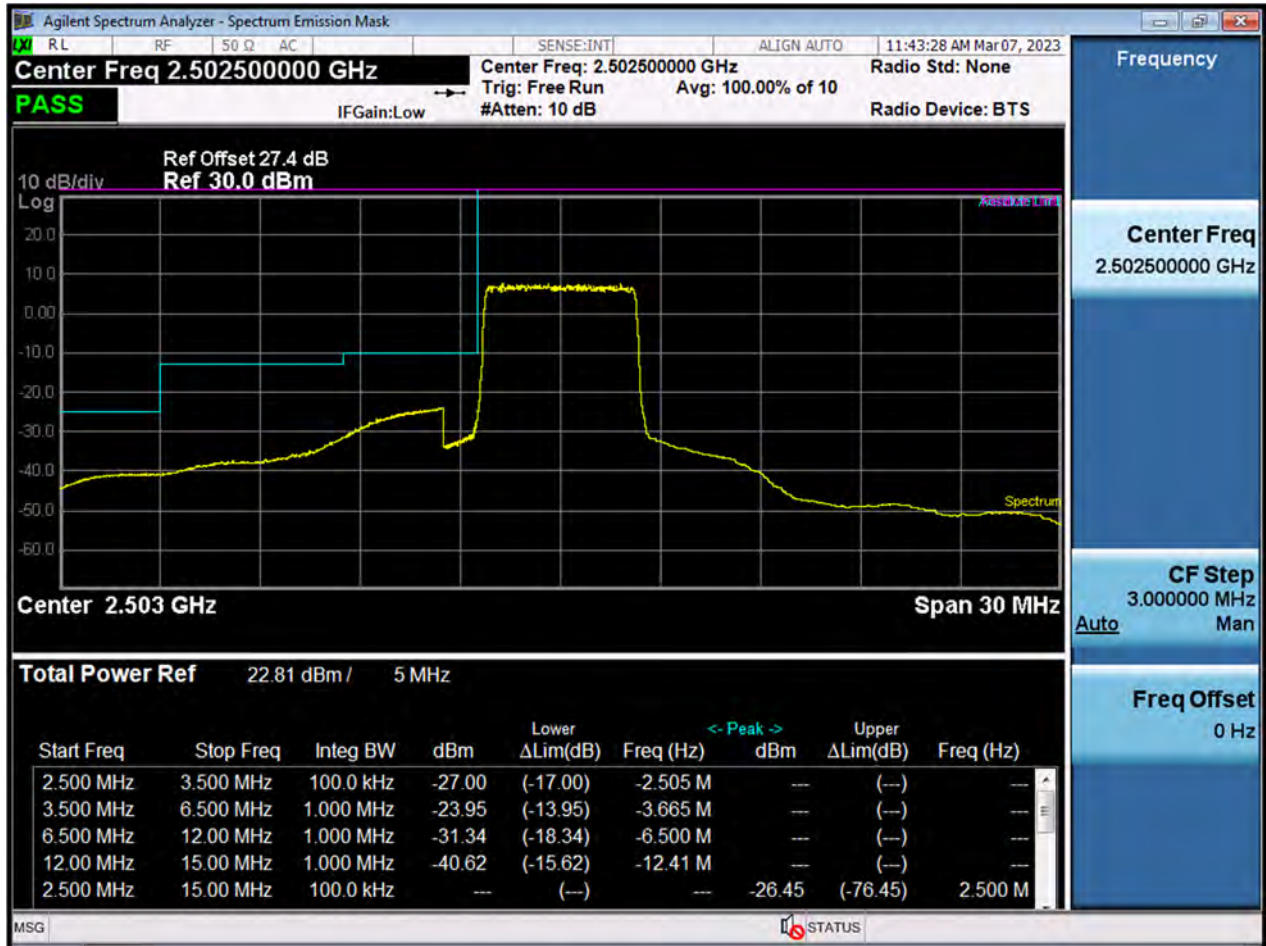




LTE7\_5 M\_BandEdge\_Upper\_Low\_2502.5 MHz\_QPSK\_FullRB






LTE7\_5 M\_BandEdge\_Low\_2502.5 MHz\_QPSK\_1RB

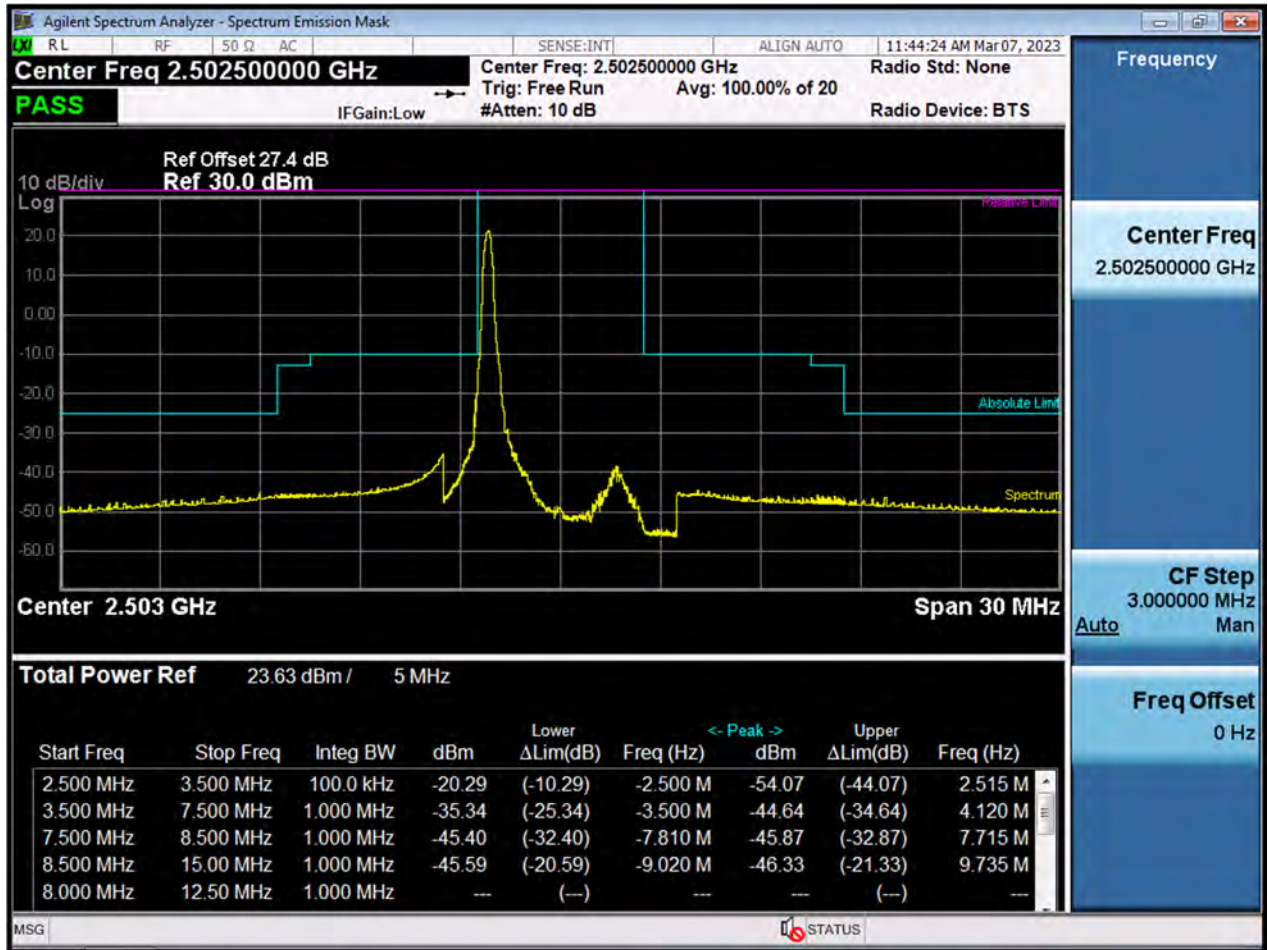






LTE7\_5 M\_BandEdge\_Mid\_2535 MHz\_QPSK\_FullRB

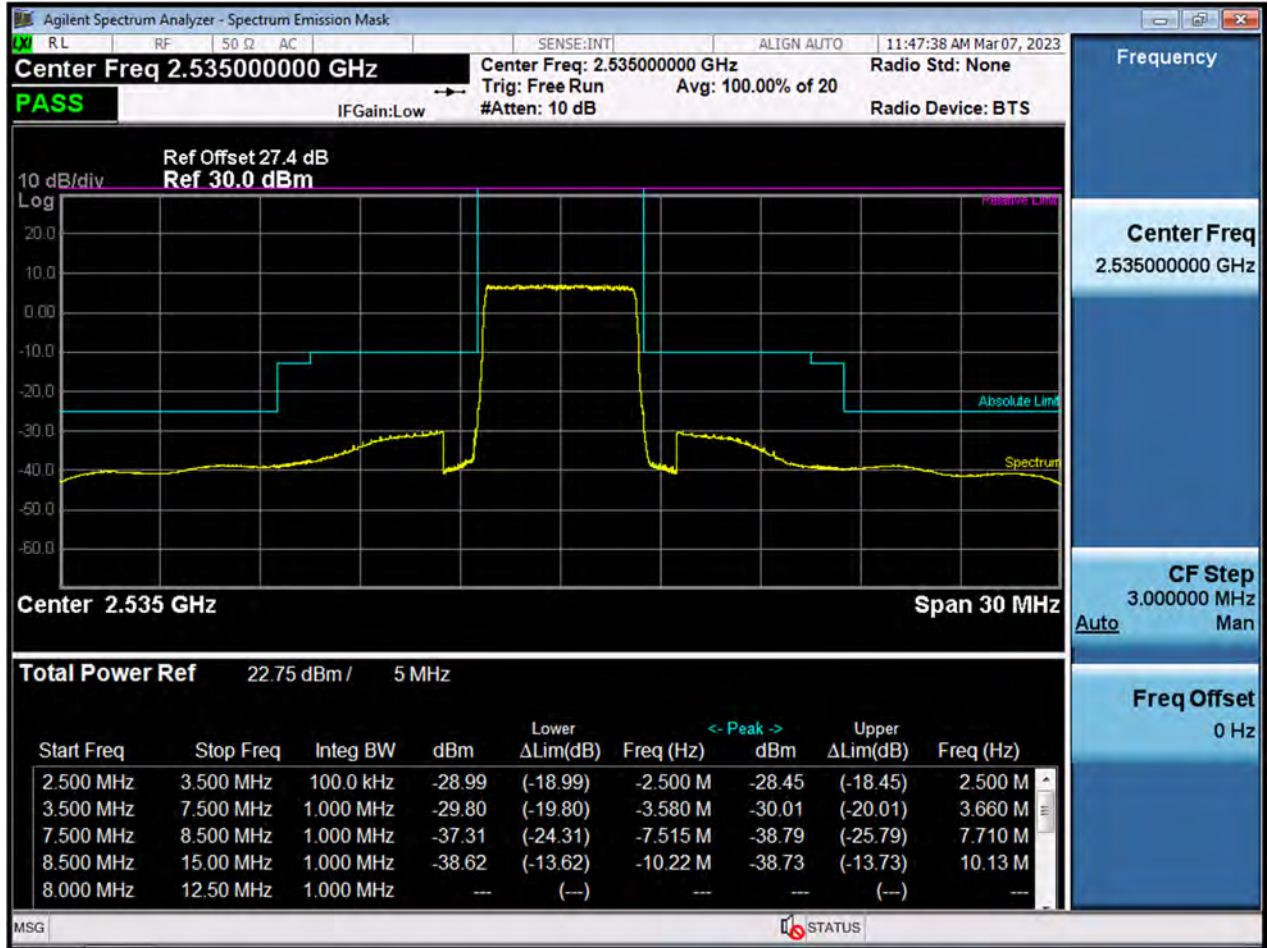




LTE7\_5 M\_BandEdge\_High\_2567.5 MHz\_QPSK\_FullRB

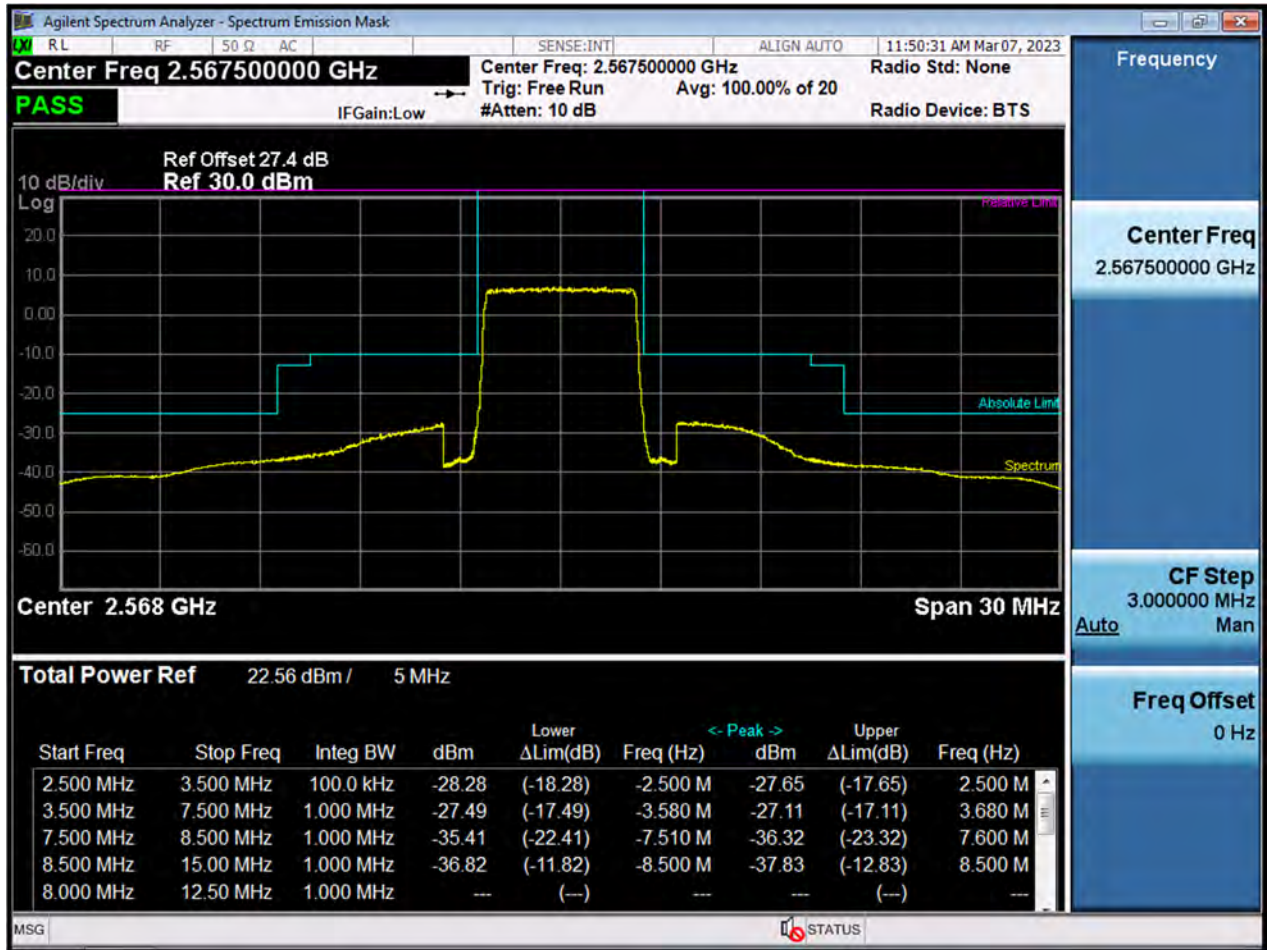



LTE7\_5 M\_BandEdge\_High\_2567.5 MHz\_QPSK\_1RB

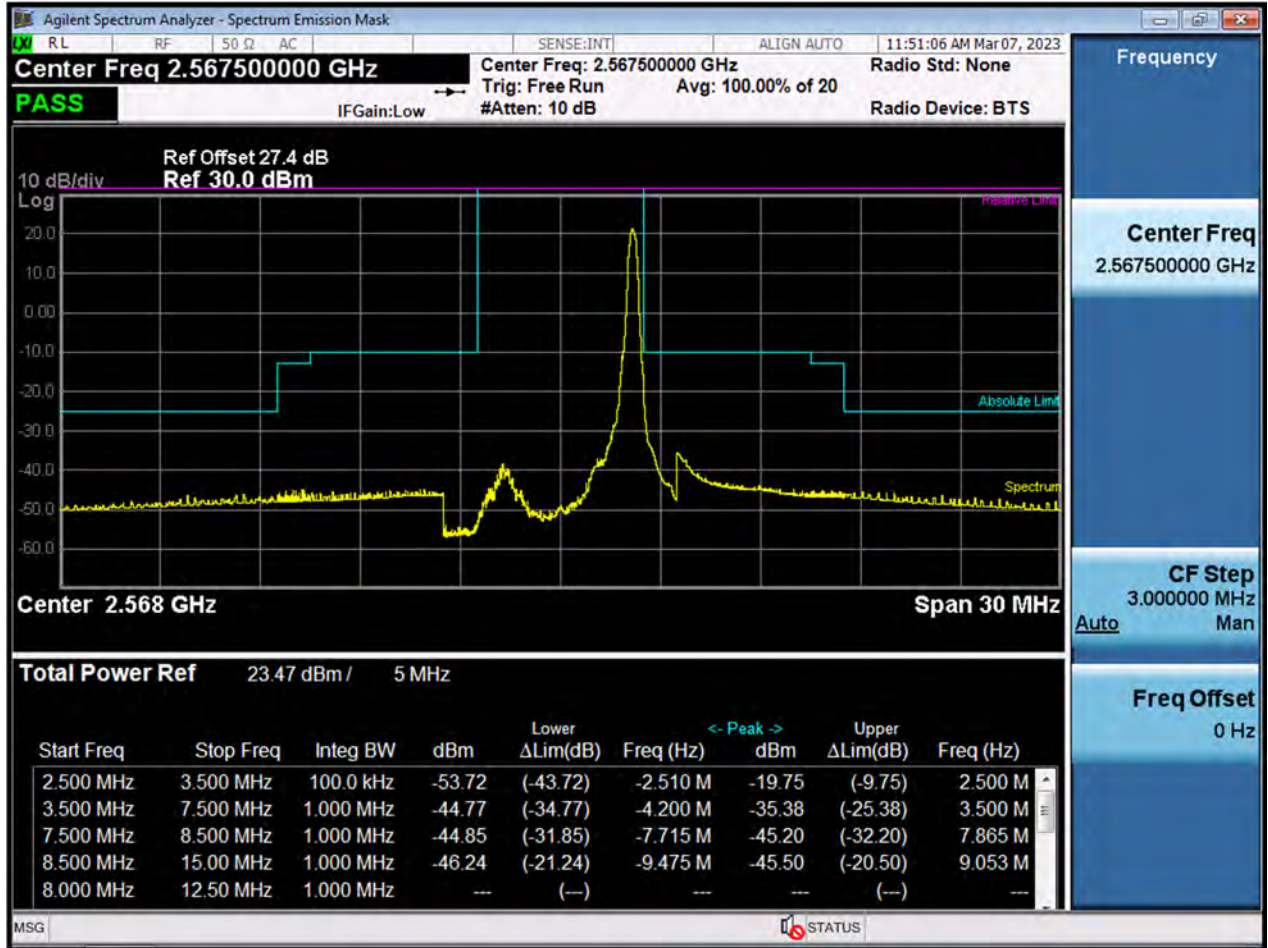



LTE7\_10 M\_BandEdge\_Lower\_Low\_2505 MHz\_QPSK\_FullRB








LTE7\_10 M\_BandEdge\_Upper\_Low\_2505 MHz\_QPSK\_FullRB






LTE7\_10 M\_BandEdge\_Low\_2505 MHz\_QPSK\_1RB

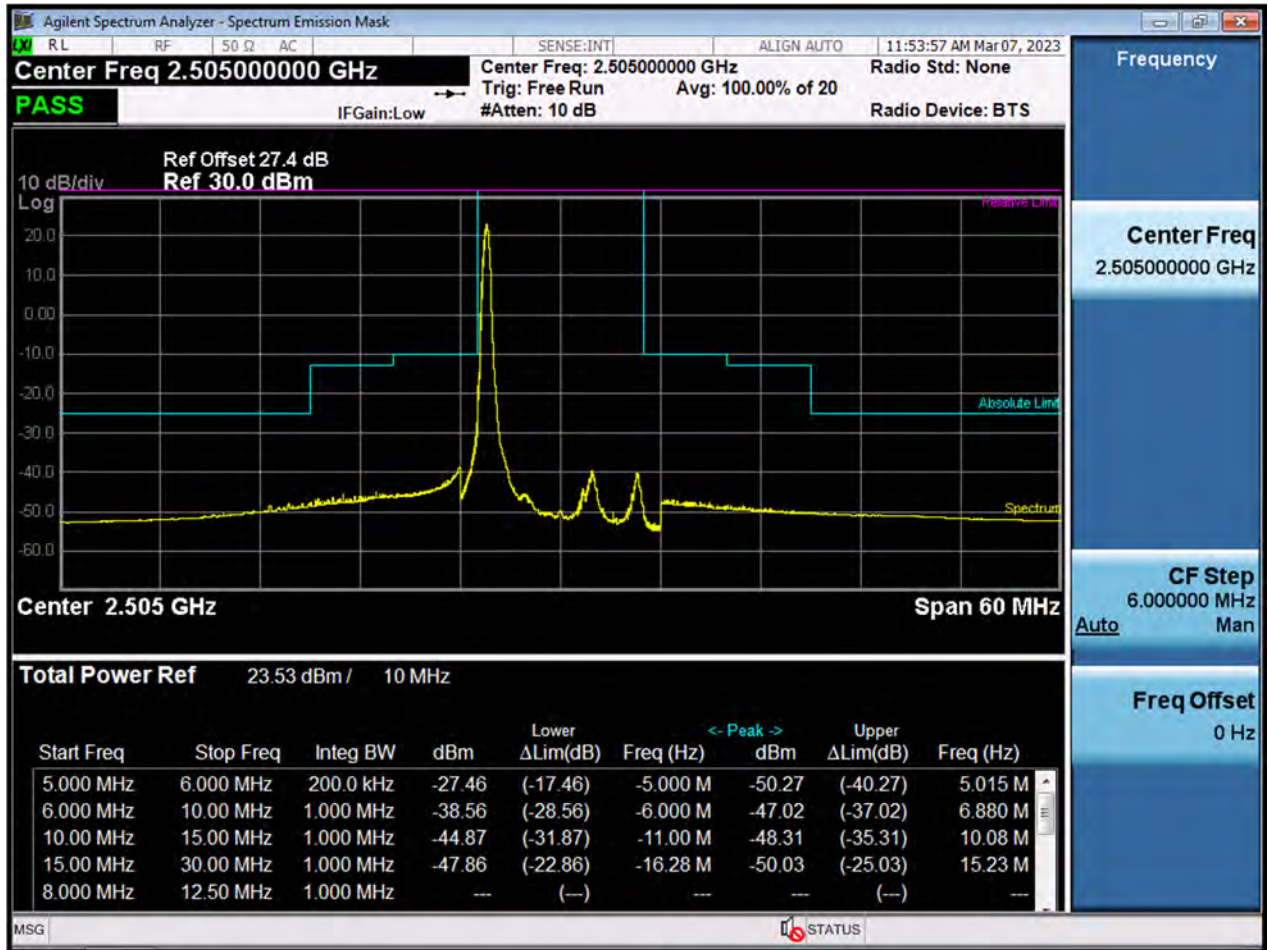




LTE7\_10 M\_BandEdge\_Mid\_2535 MHz\_QPSK\_FullRB

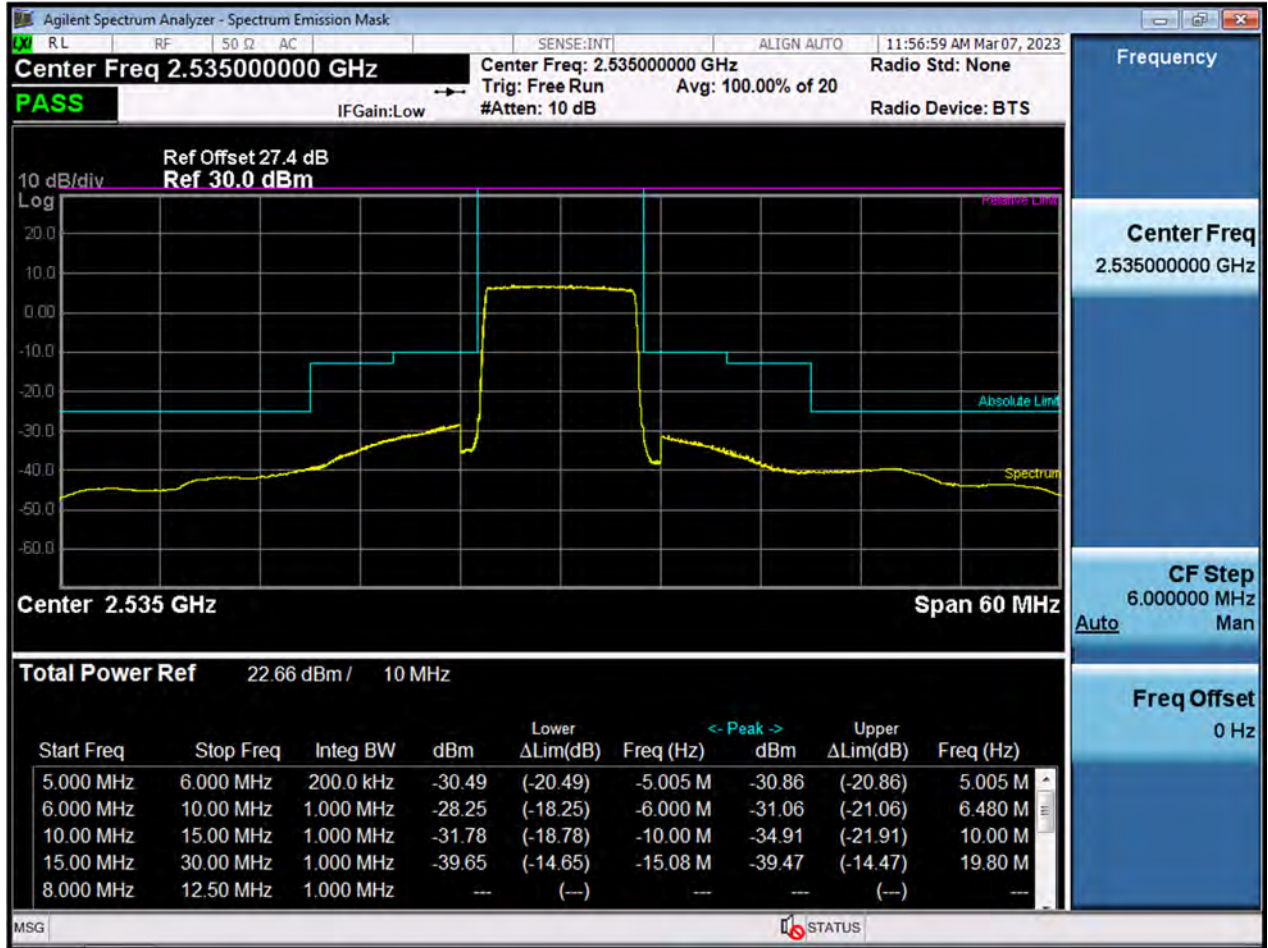




LTE7\_10 M\_BandEdge\_High\_2565 MHz\_QPSK\_FullRB

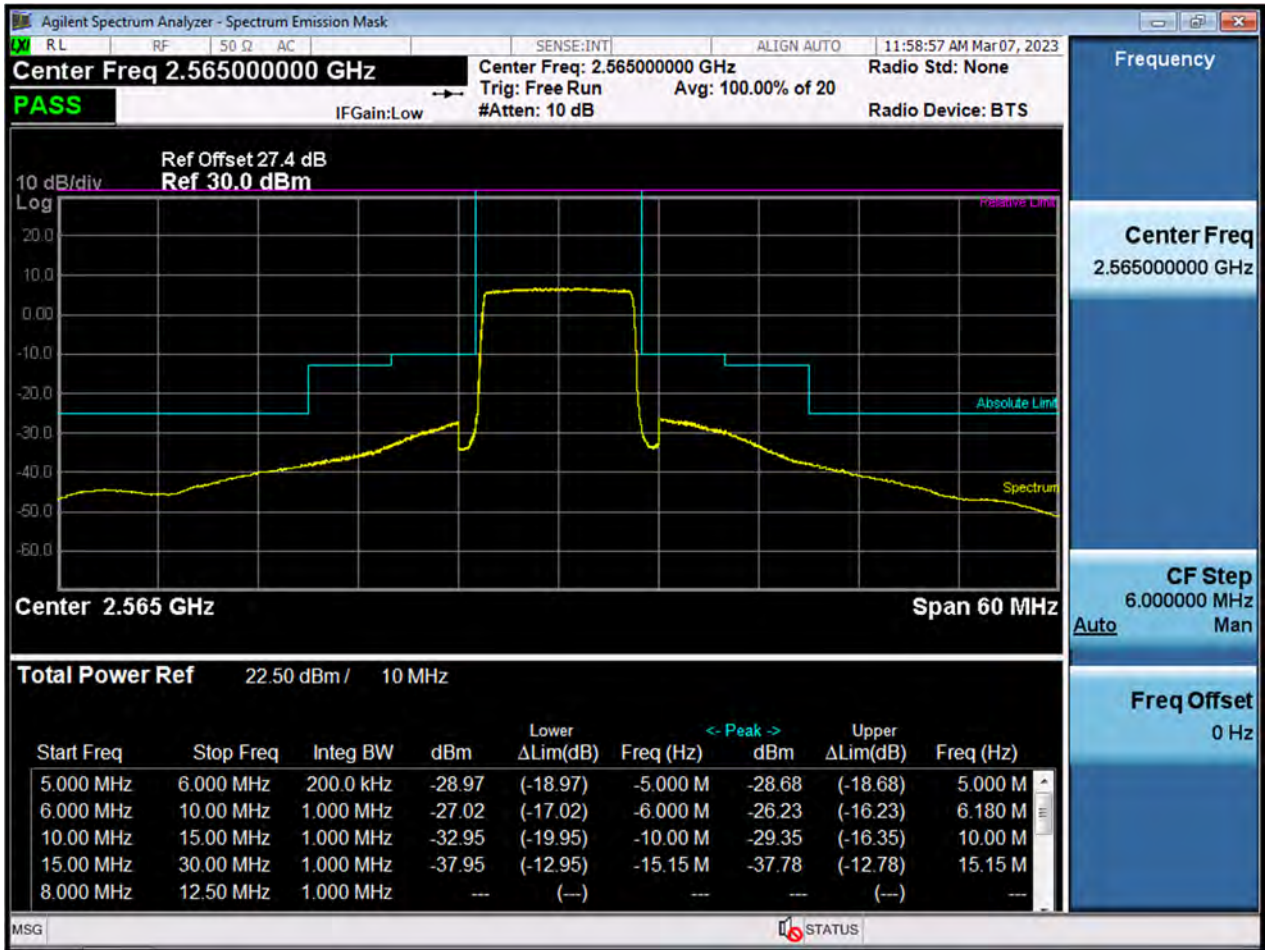





LTE7\_10 M\_BandEdge\_High\_2565 MHz\_QPSK\_1RB

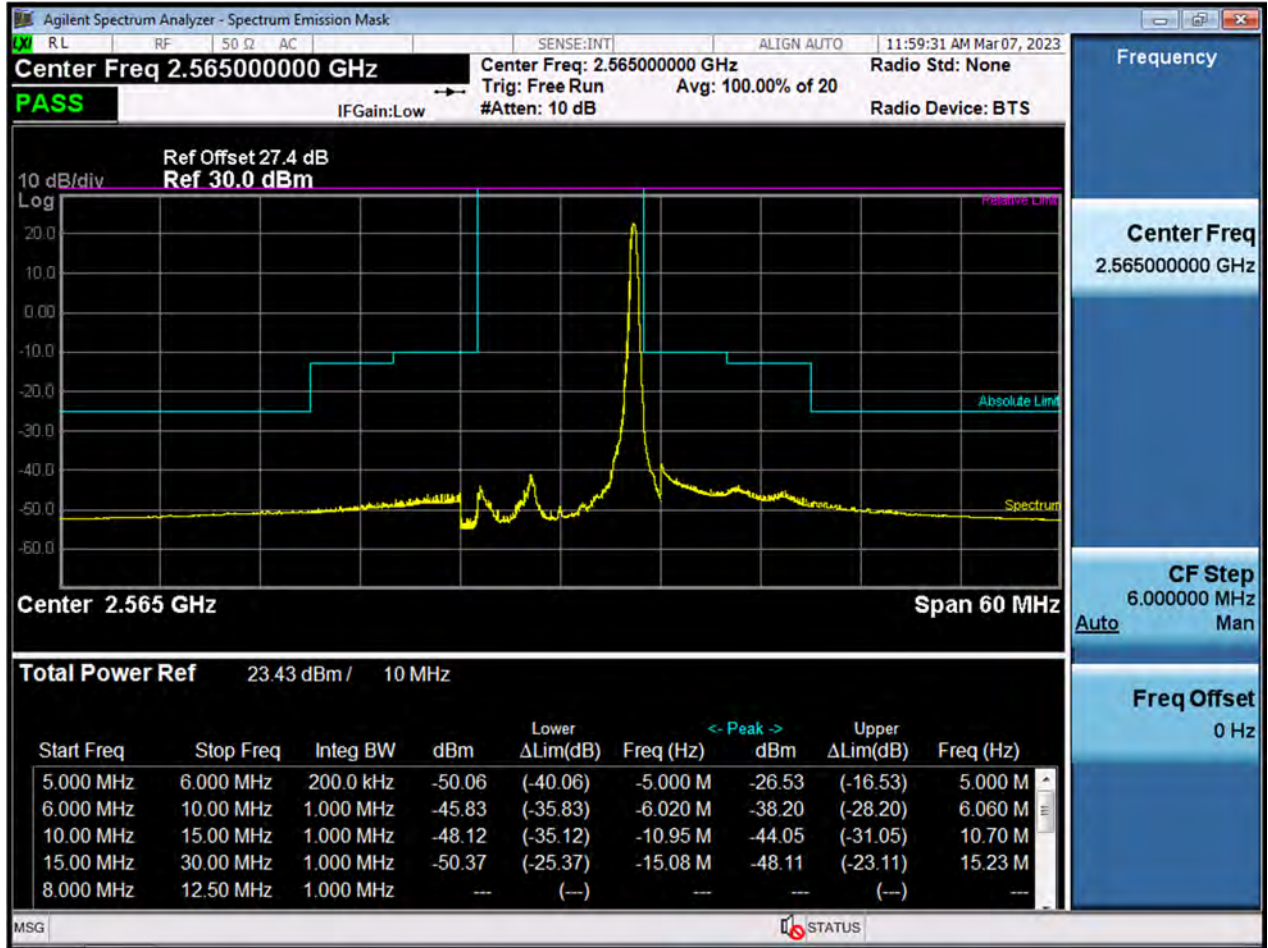




LTE7\_15 M\_BandEdge\_Lower\_Low\_2507.5 MHz\_QPSK\_FullRB






LTE7\_15 M\_BandEdge\_Upper\_Low\_2507.5 MHz\_QPSK\_FullRB

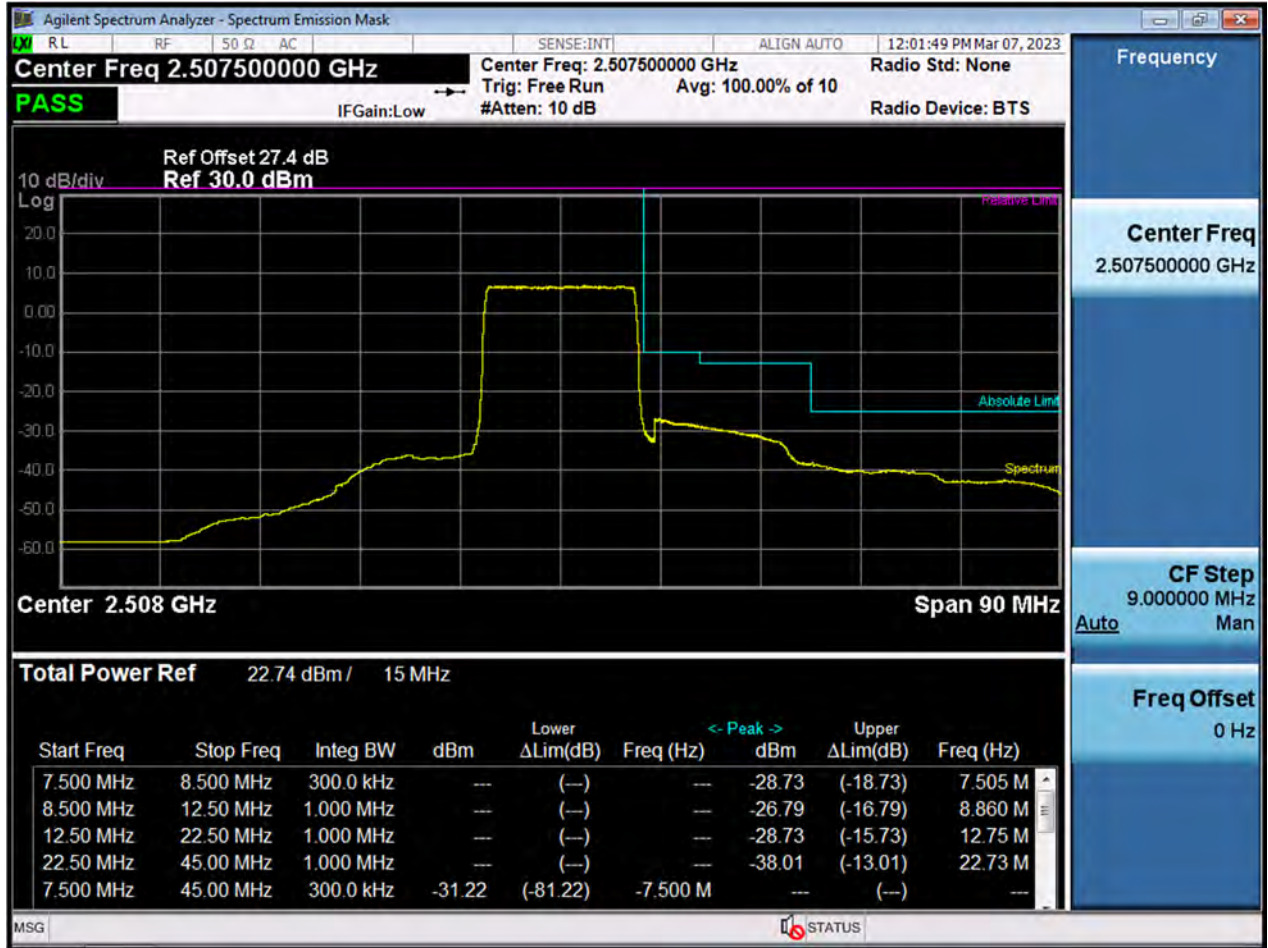




LTE7\_15 M\_BandEdge\_Low\_2507.5 MHz\_QPSK\_1RB

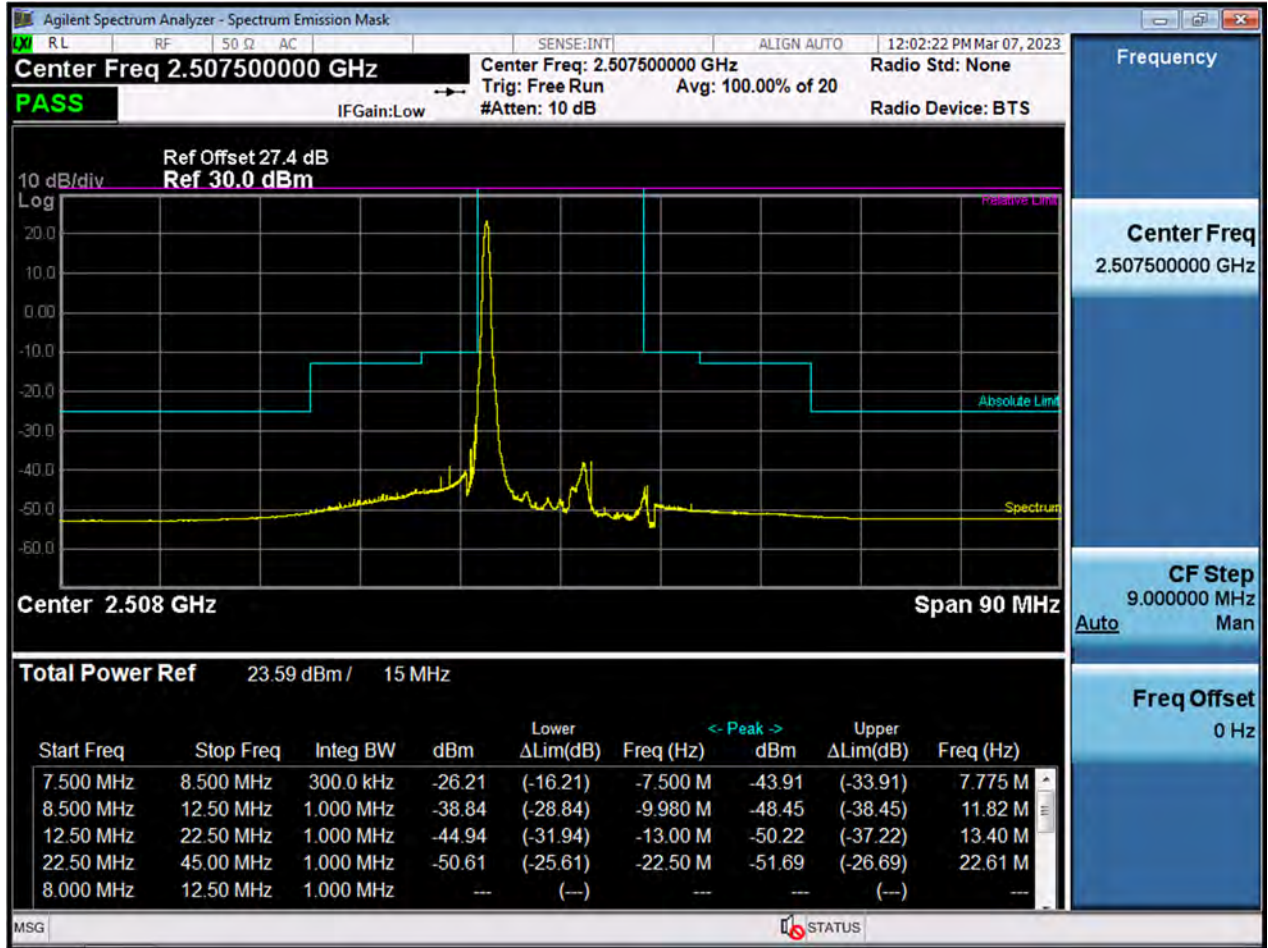






LTE7\_15 M\_BandEdge\_Mid\_2535 MHz\_QPSK\_FullRB

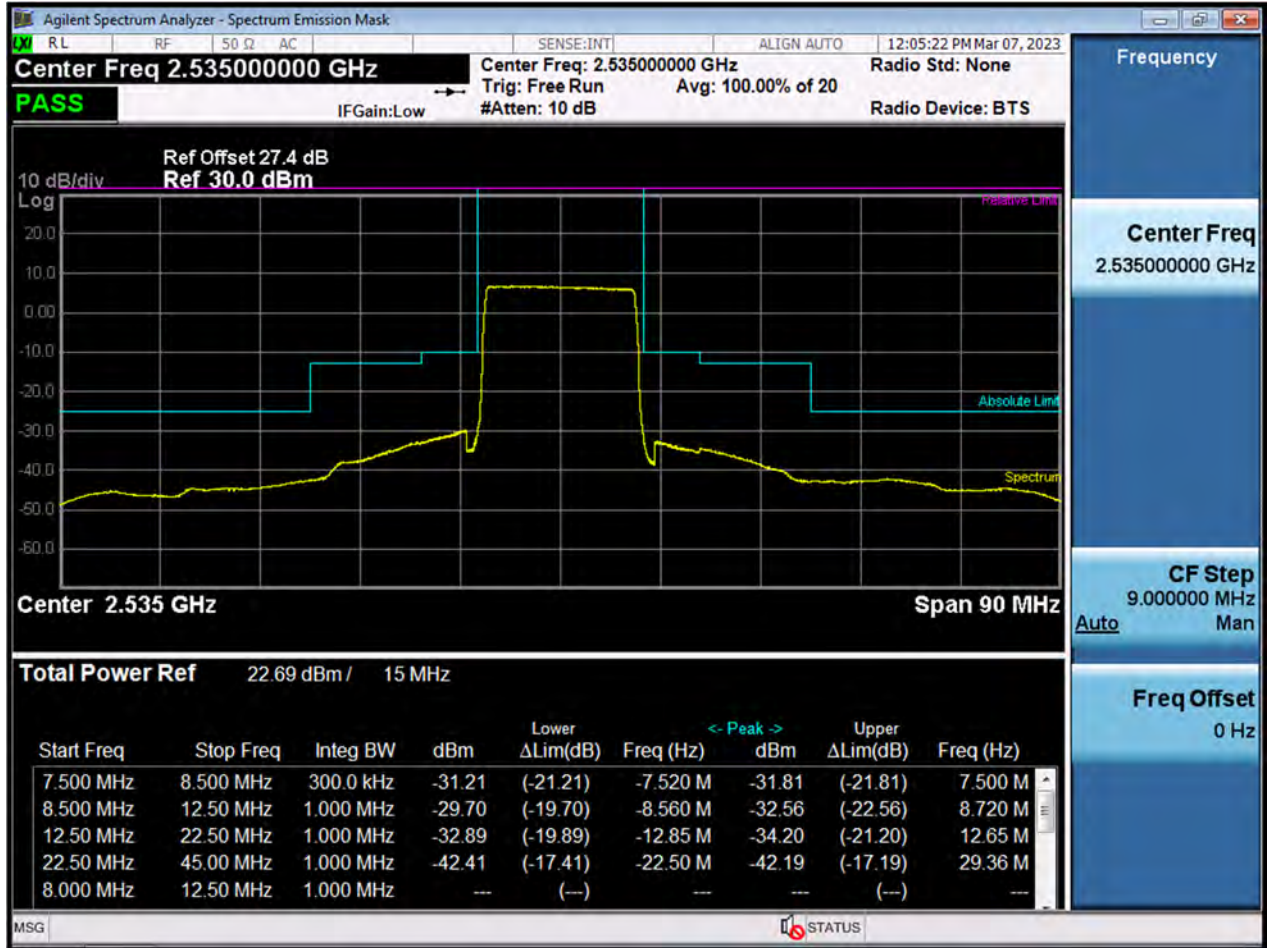




LTE7\_15 M\_BandEdge\_High\_2562.5 MHz\_QPSK\_FullIRB

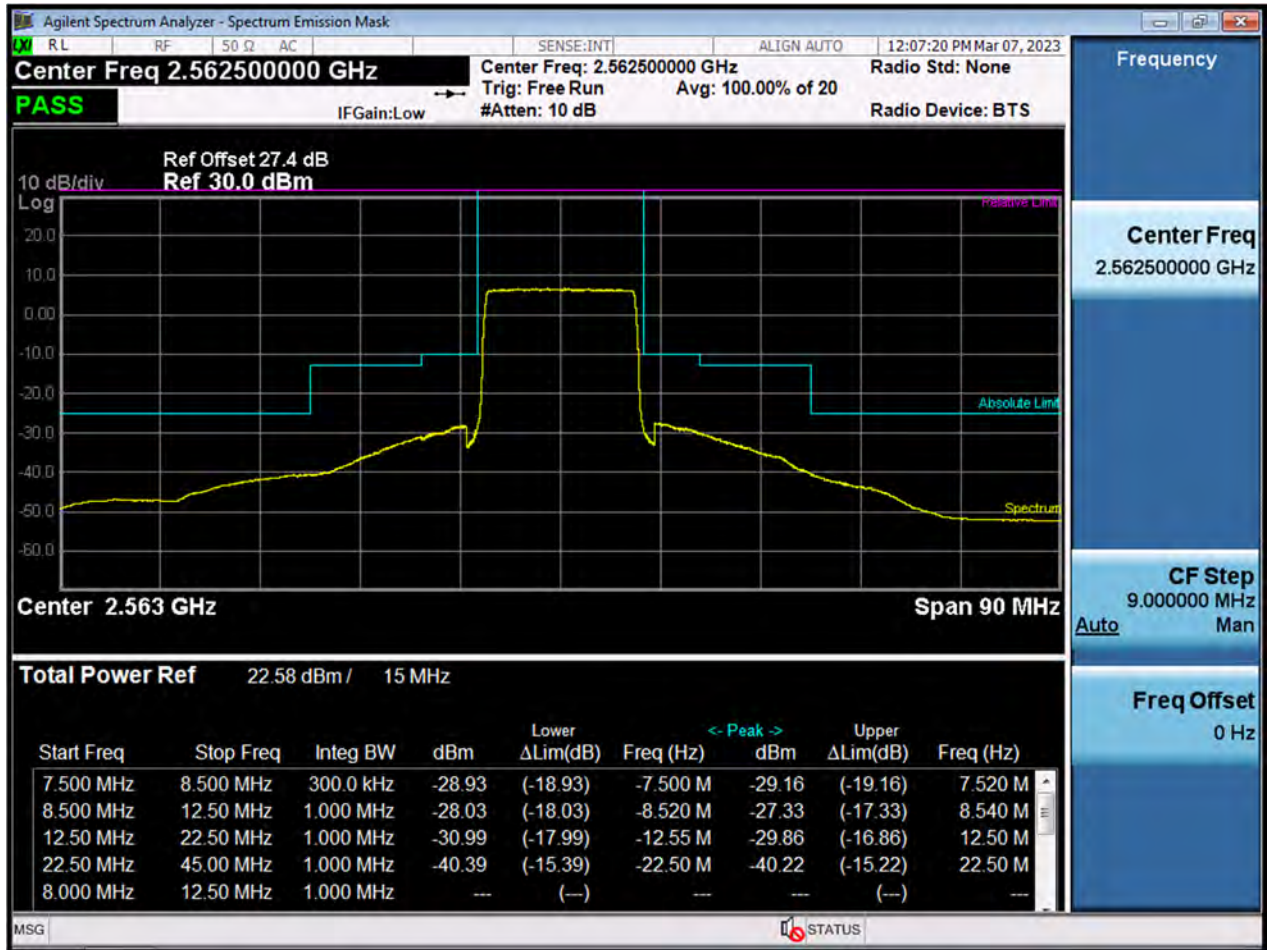



LTE7\_15 M\_BandEdge\_High\_2562.5 MHz\_QPSK\_1RB

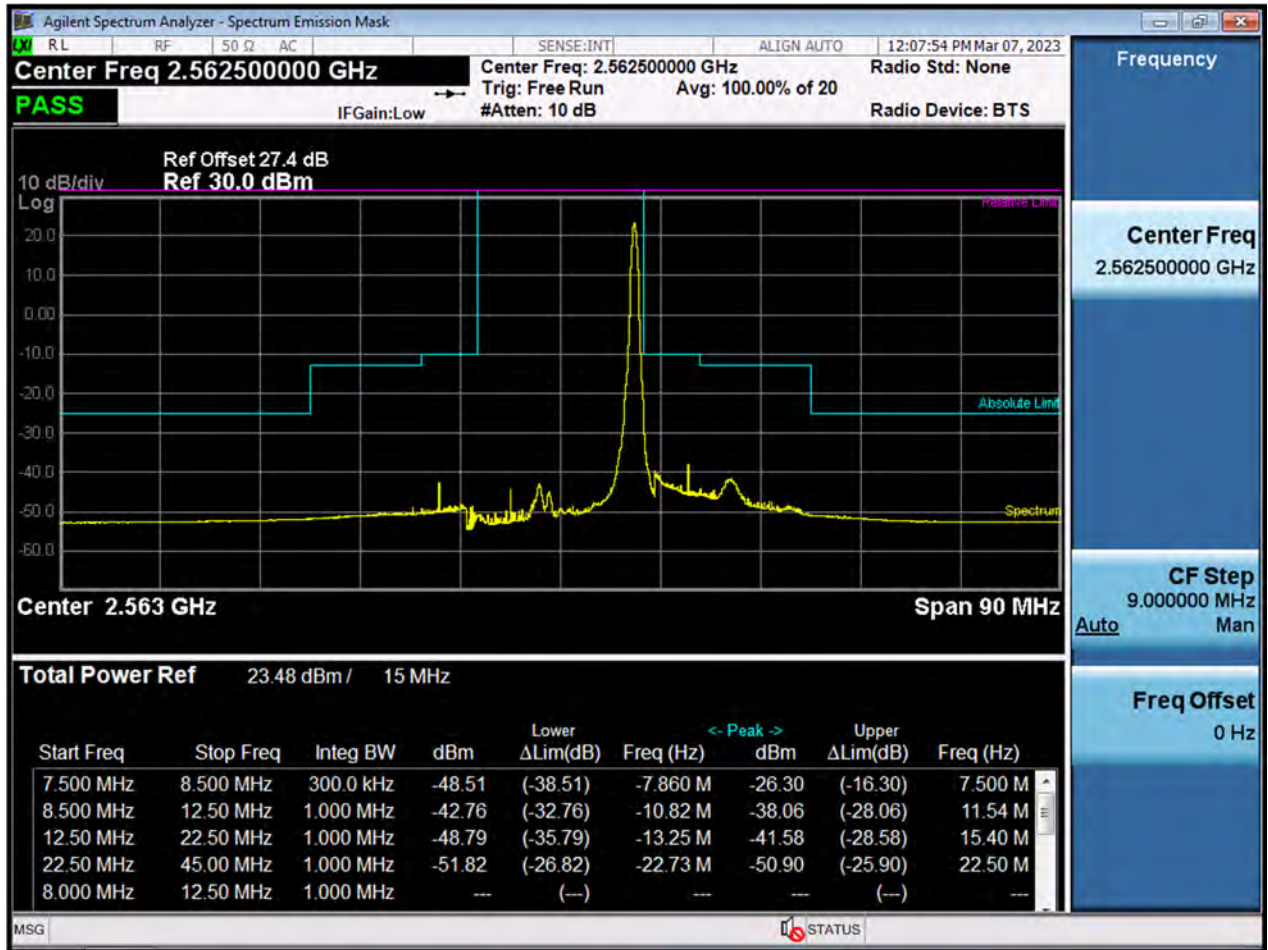



LTE7\_20 M\_BandEdge\_Lower\_Low\_2510 MHz\_QPSK\_FullRB








LTE7\_20 M\_BandEdge\_Upper\_Low\_2510 MHz\_QPSK\_FullRB






LTE7\_20 M\_BandEdge\_Low\_2510 MHz\_QPSK\_1RB

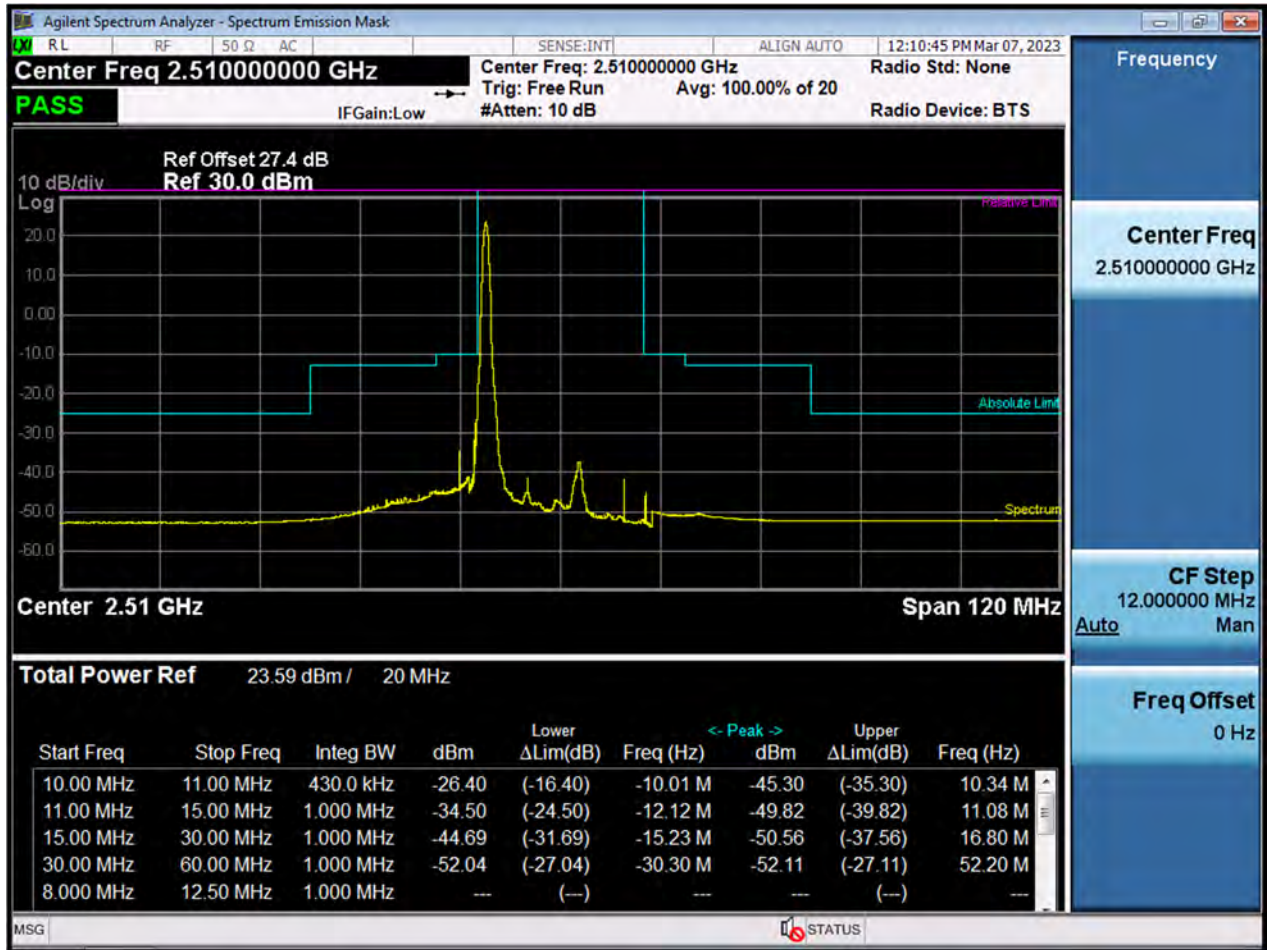




LTE7\_20 M\_BandEdge\_Mid\_2535 MHz\_QPSK\_FullRB

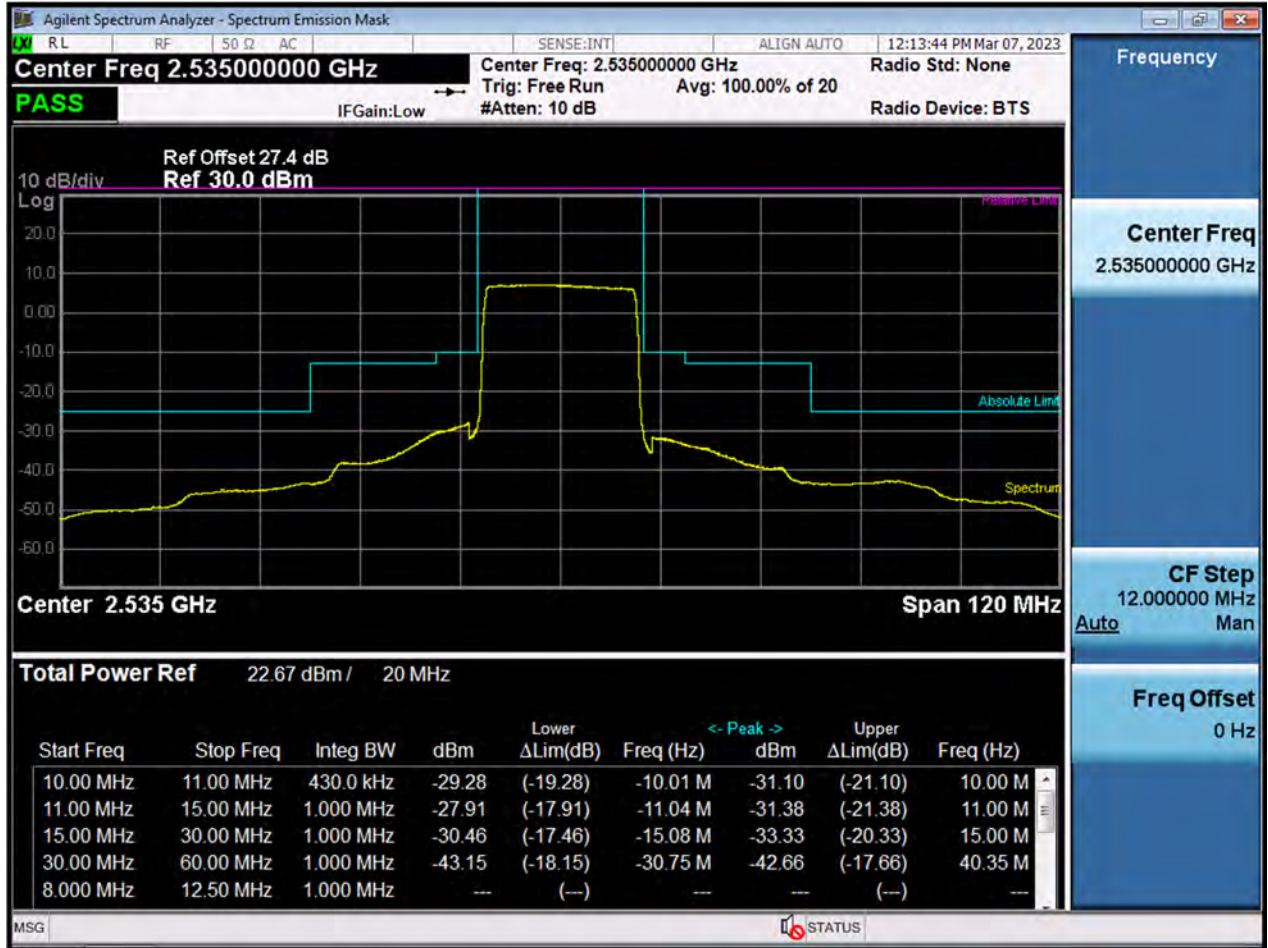




LTE7\_20 M\_BandEdge\_High\_2560 MHz\_QPSK\_FullRB

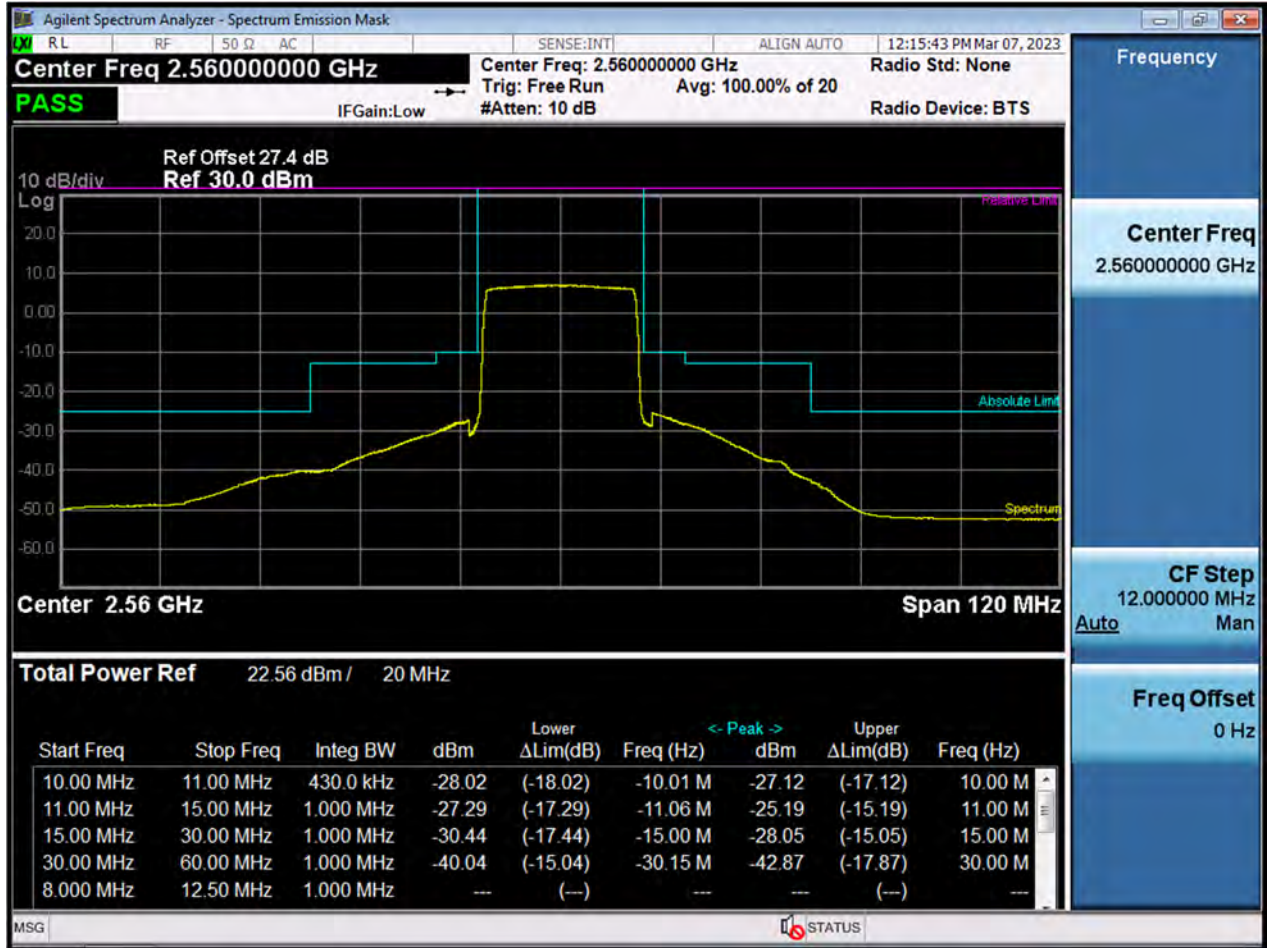






LTE7\_20 M\_BandEdge\_High\_2560 MHz\_QPSK\_1RB

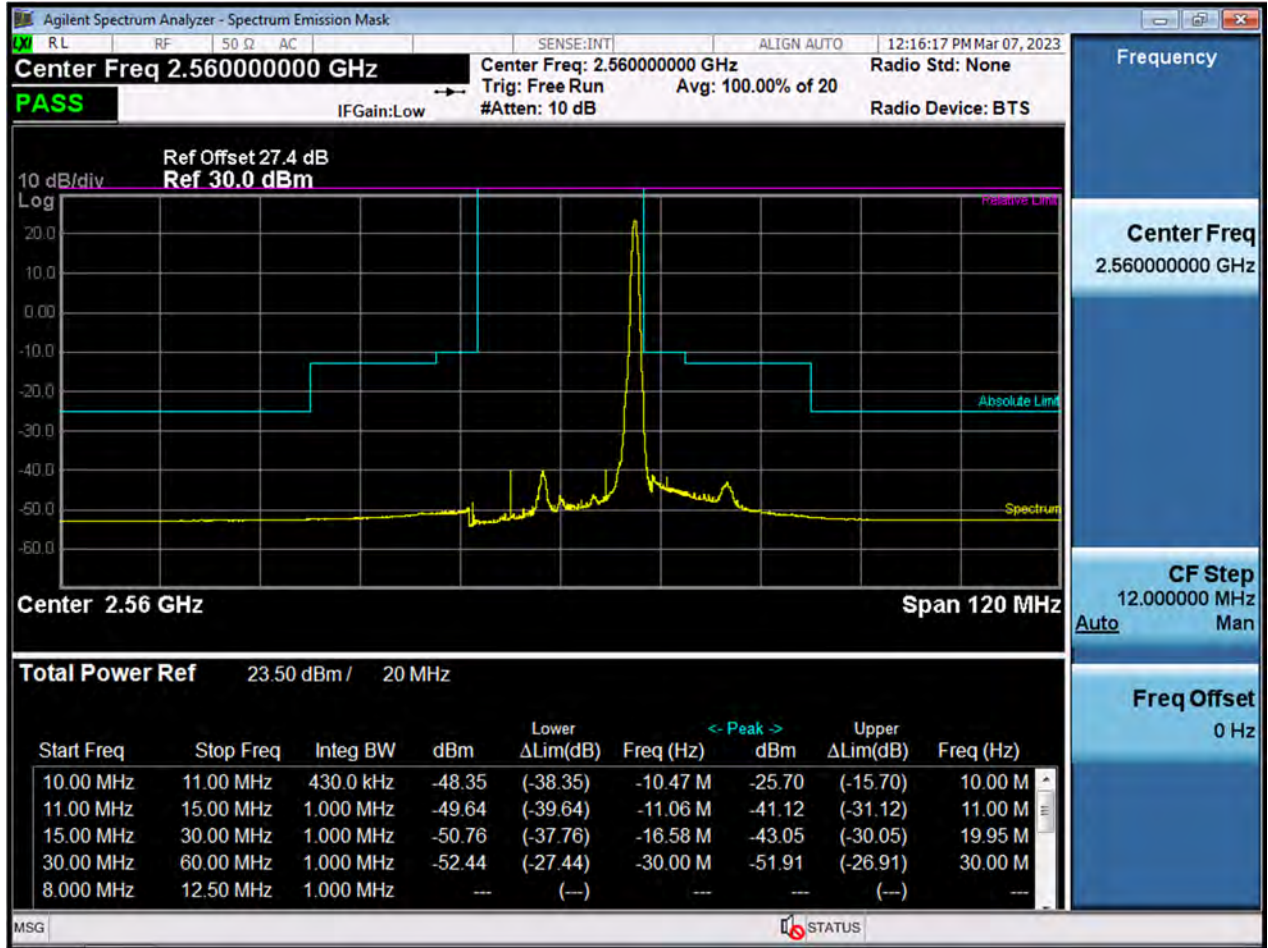




LTE7\_5 M\_OBW\_Mid Channel\_QPSK\_FullRB

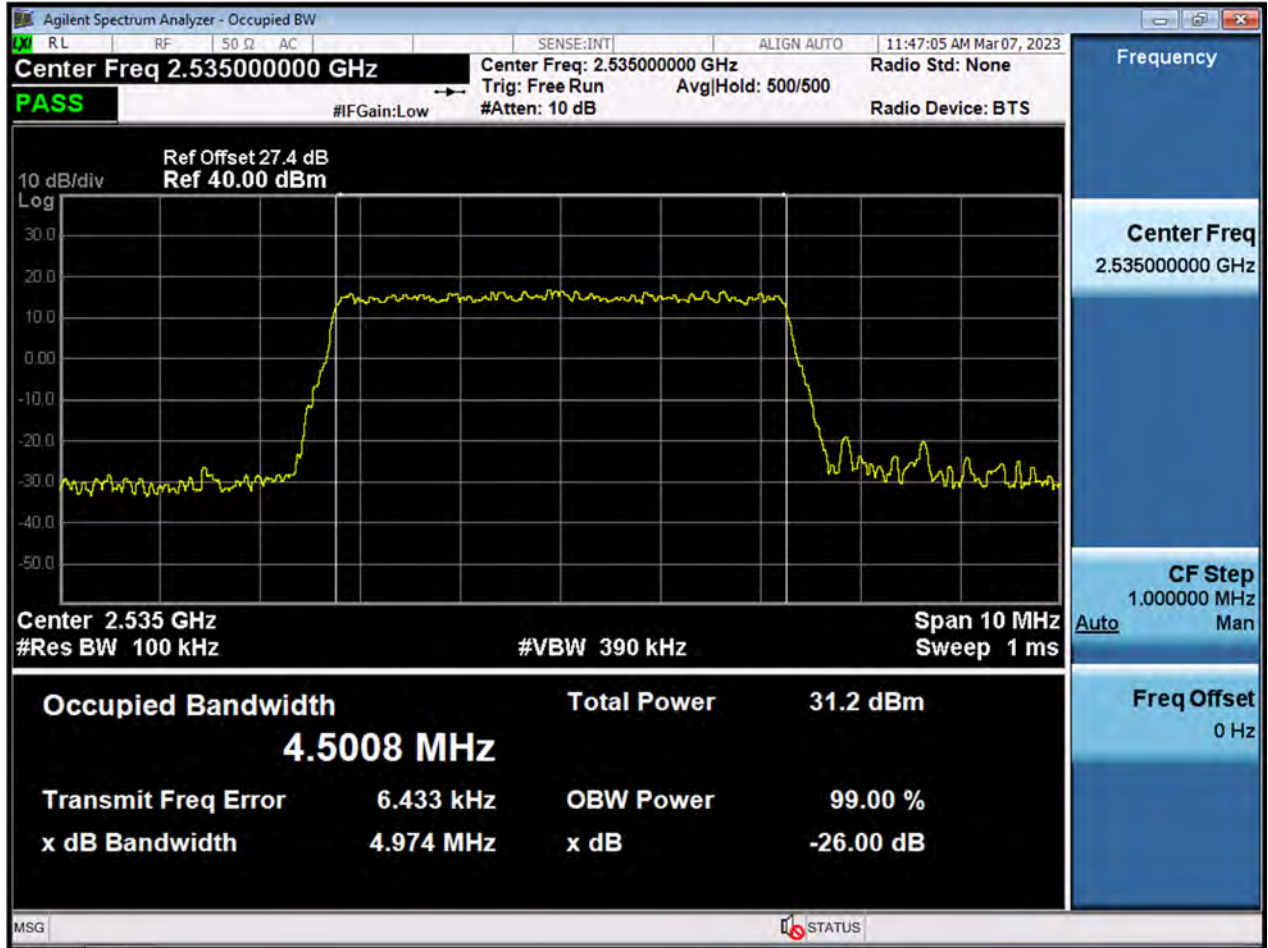




LTE7\_5 M\_OBW\_Mid Channel\_16QAM\_FullRB

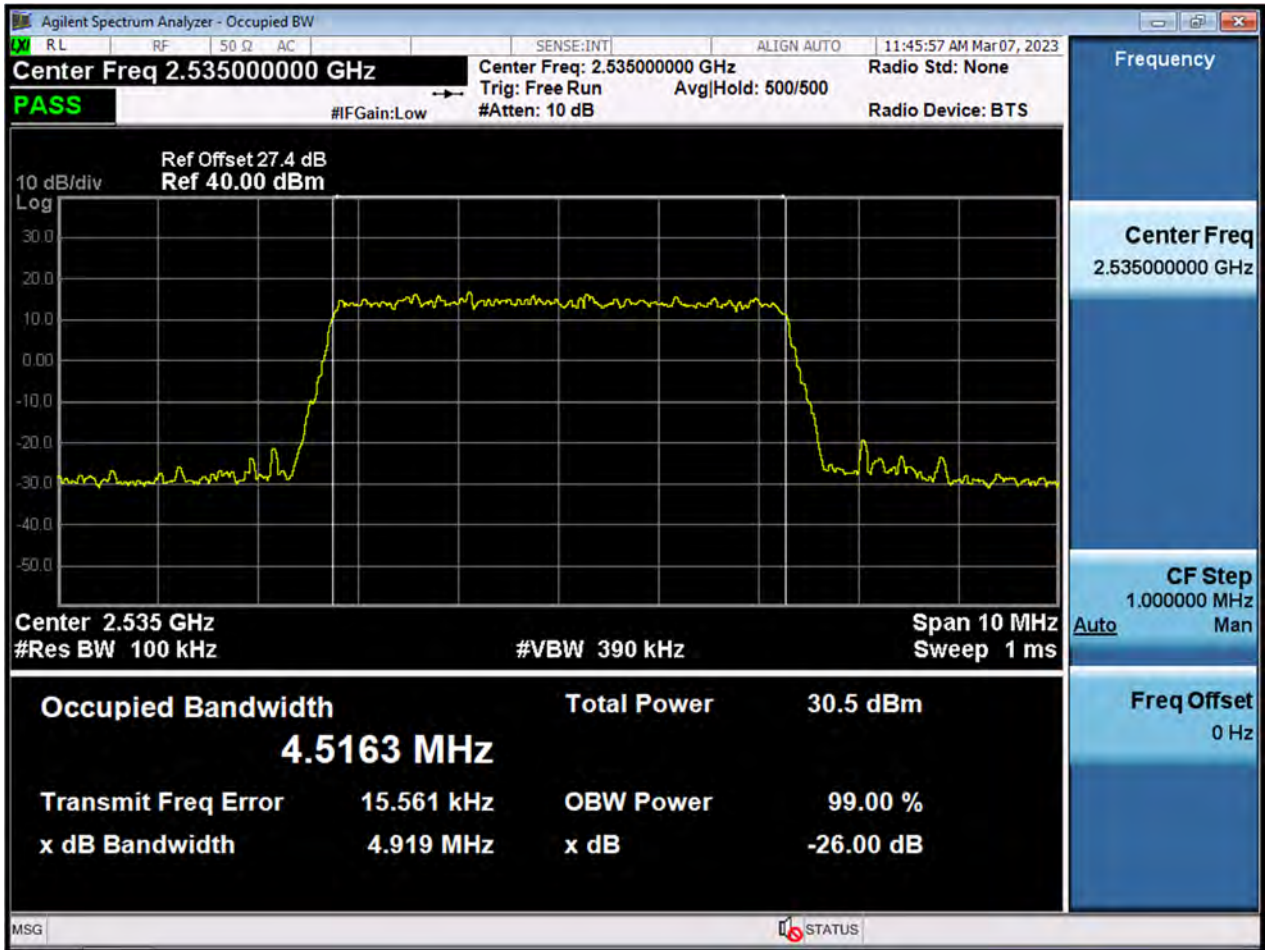




LTE7\_5 M\_OBW\_Mid Channel\_64QAM\_FullRB

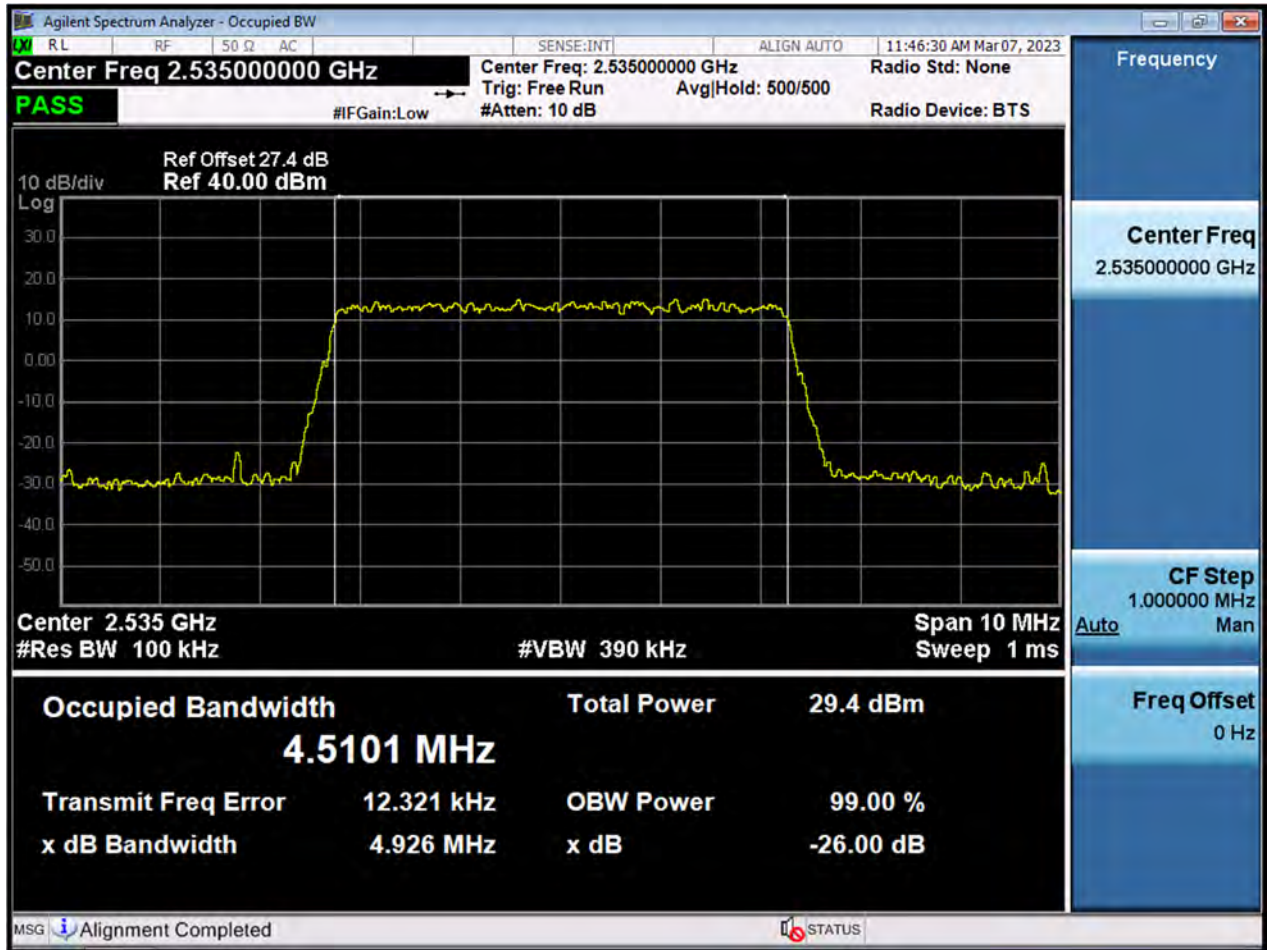






LTE7\_5 M\_OBW\_Mid Channel\_256QAM\_FullRB

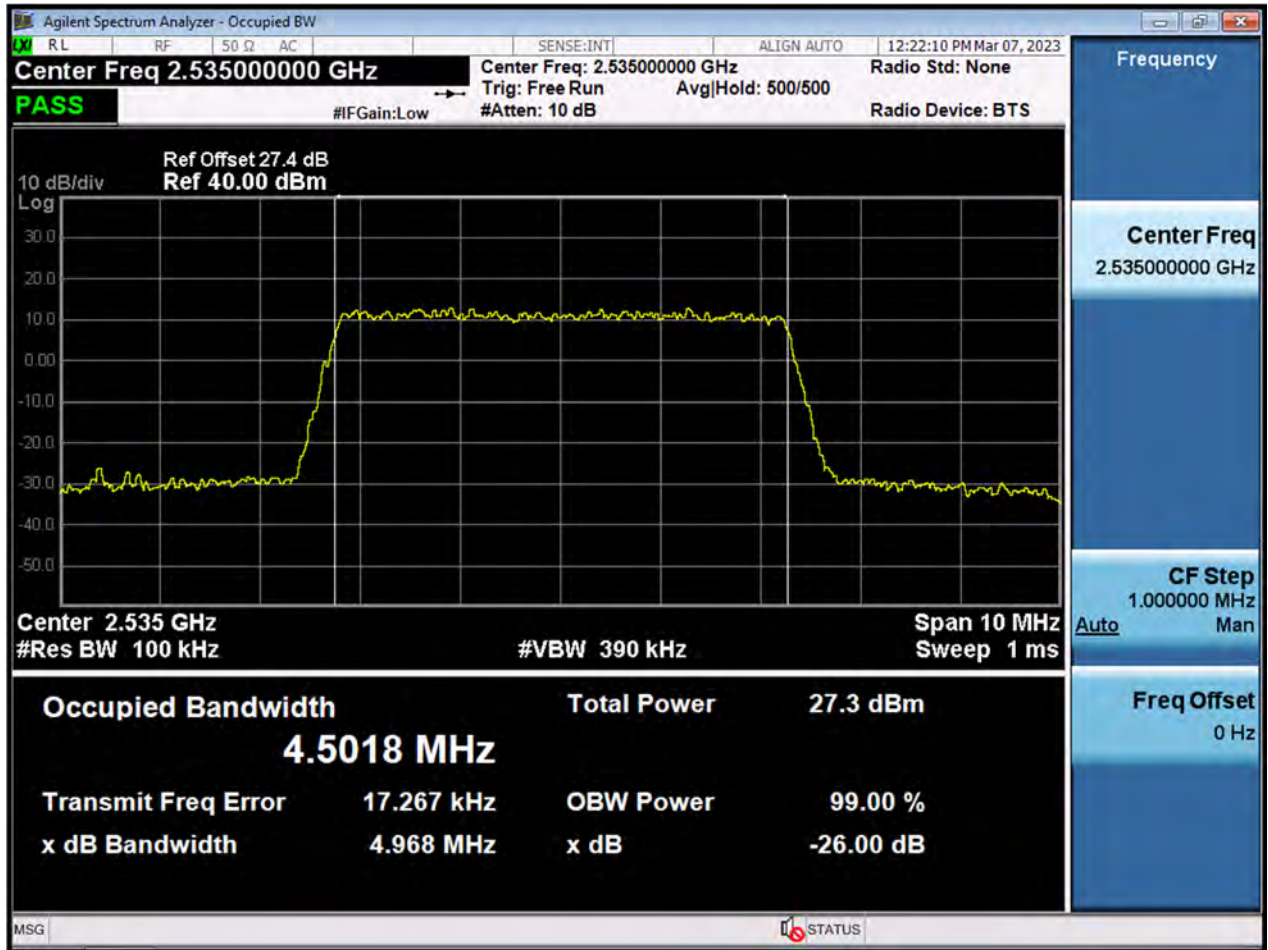




LTE7\_10 M\_OBW\_Mid Channel\_QPSK\_FullRB

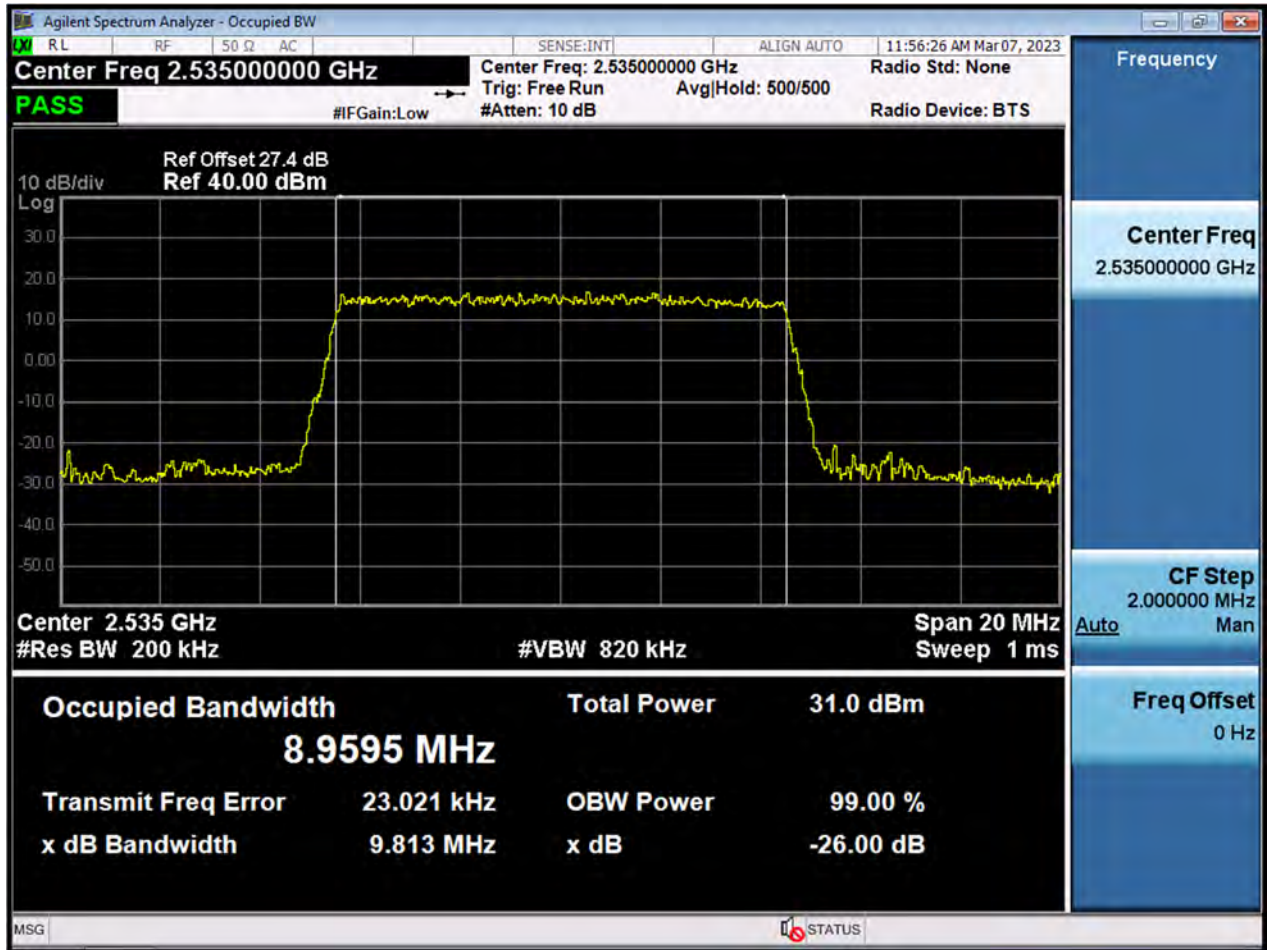




LTE7\_10 M\_OBW\_Mid Channel\_16QAM\_FullRB

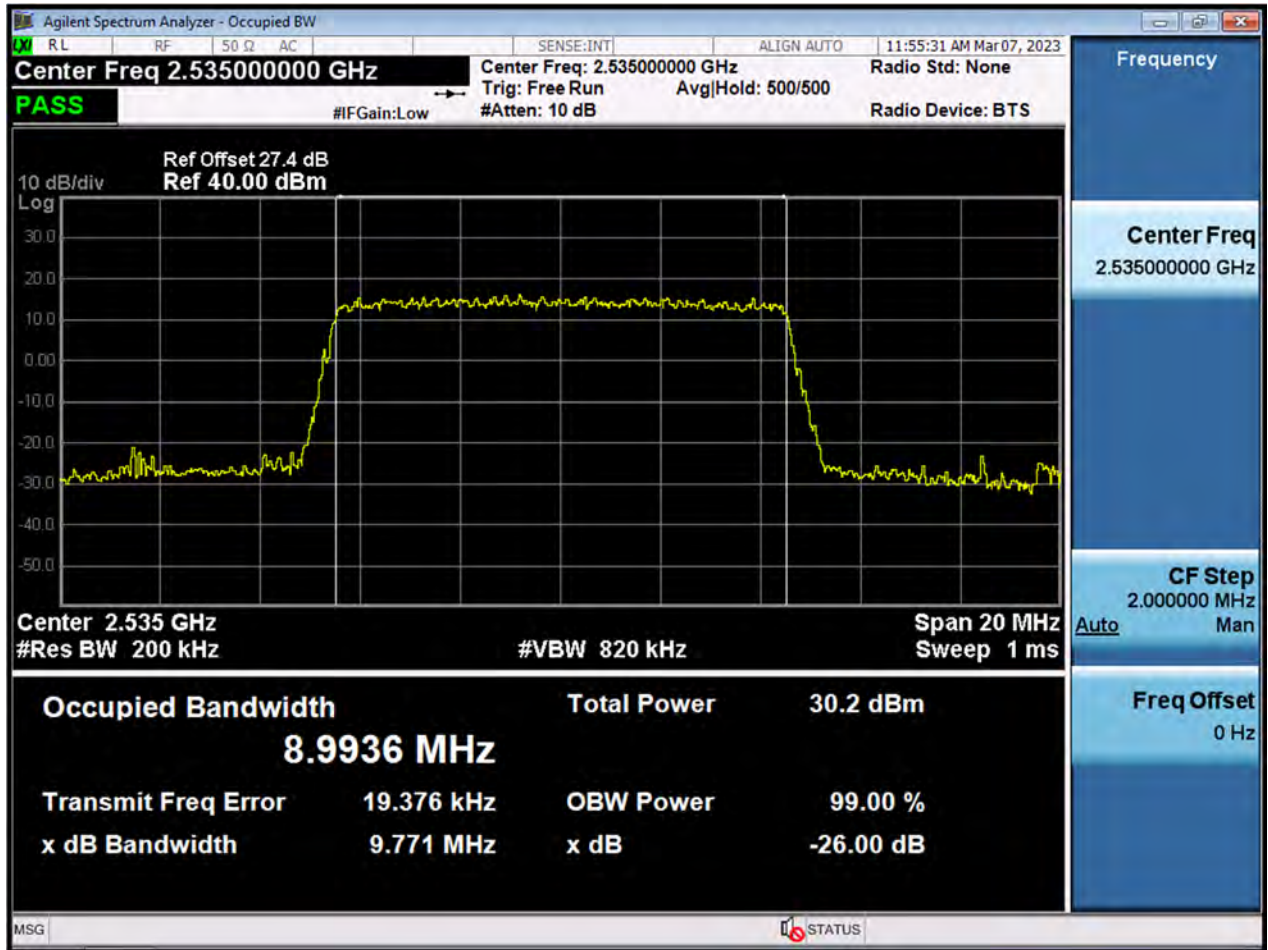




LTE7\_10 M\_OBW\_Mid Channel\_64QAM\_FullRB

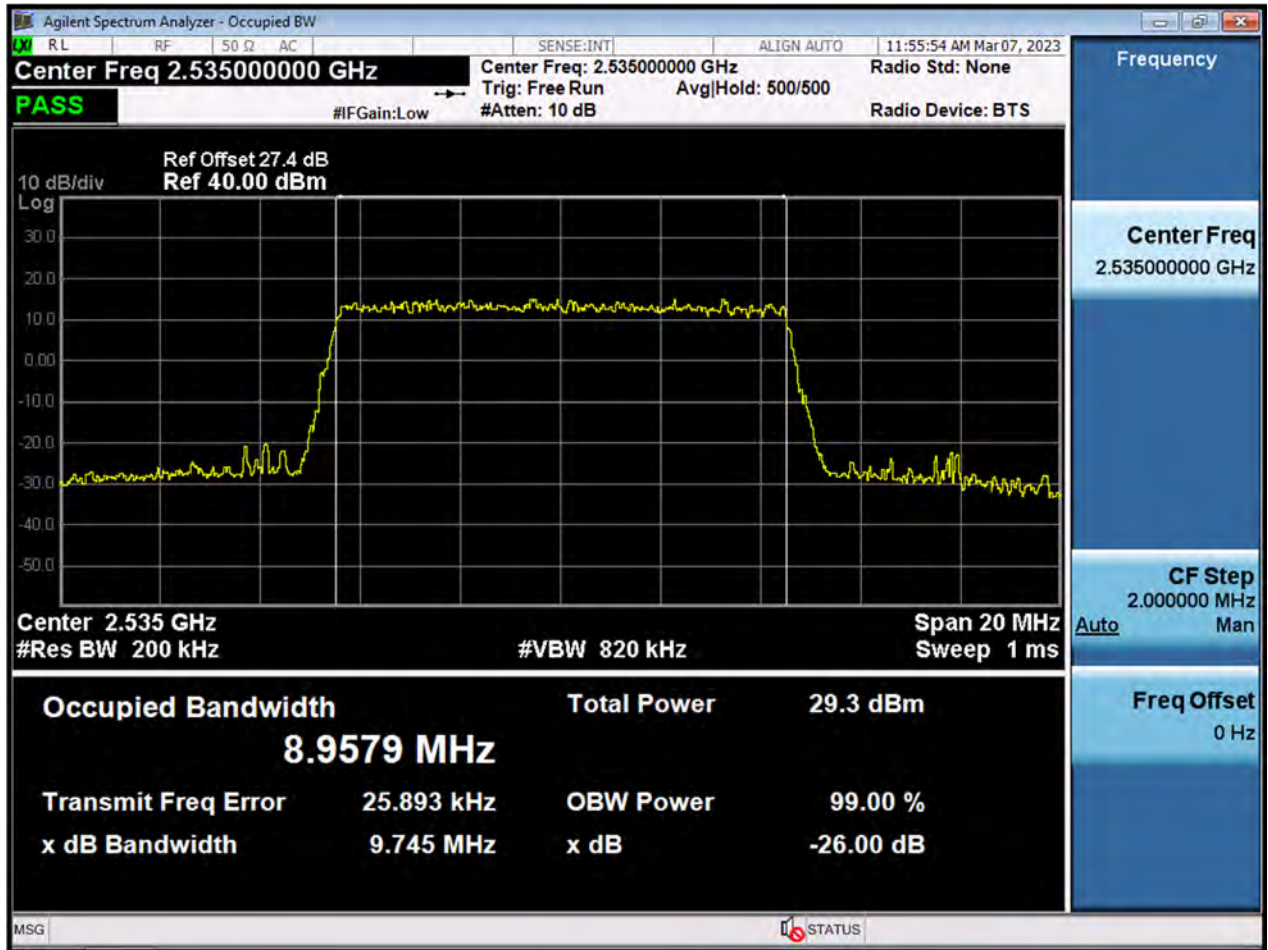






LTE7\_10 M\_OBW\_Mid Channel\_256QAM\_FullRB

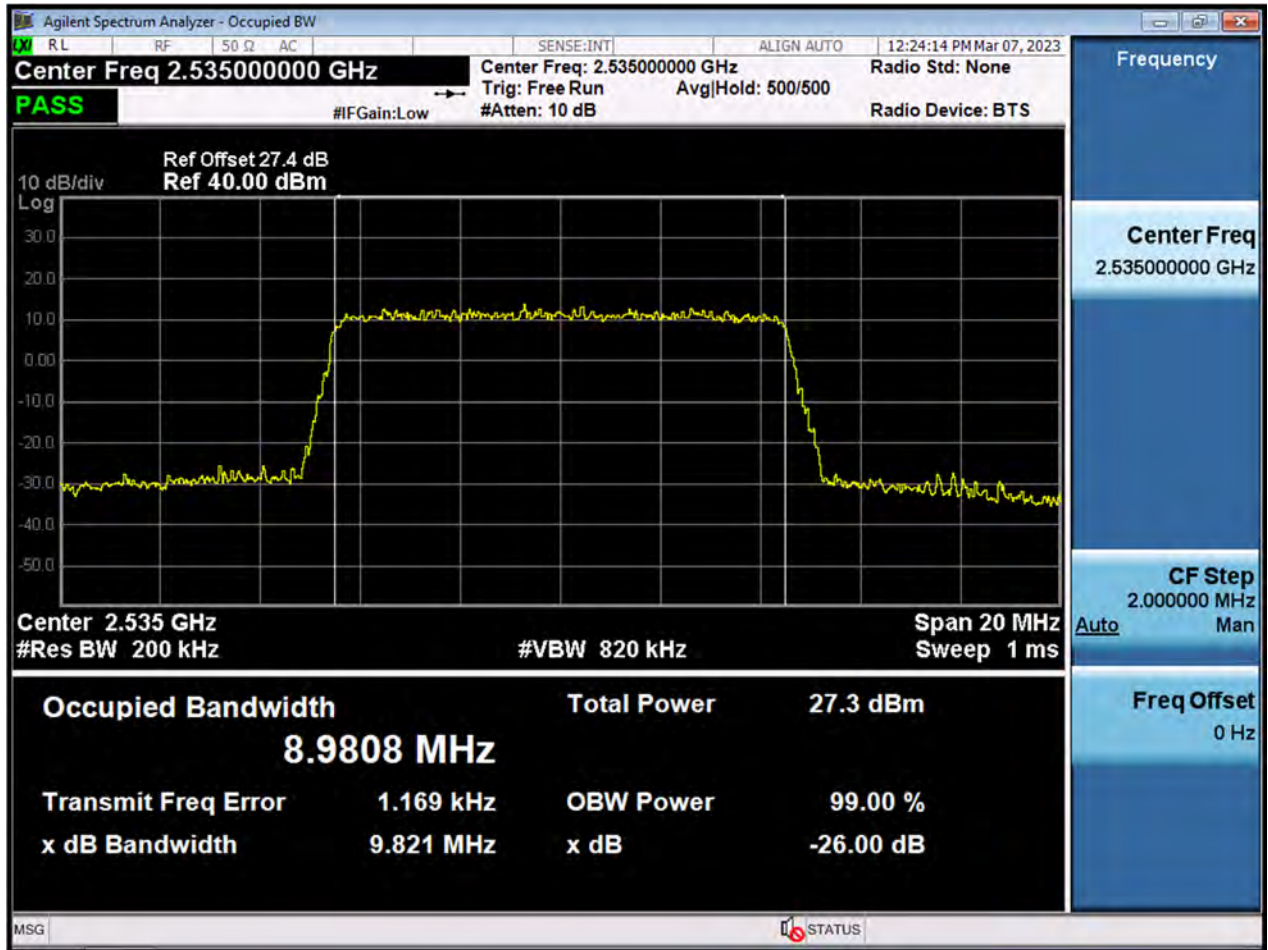




LTE7\_15 M\_OBW\_Mid Channel\_QPSK\_FullRB

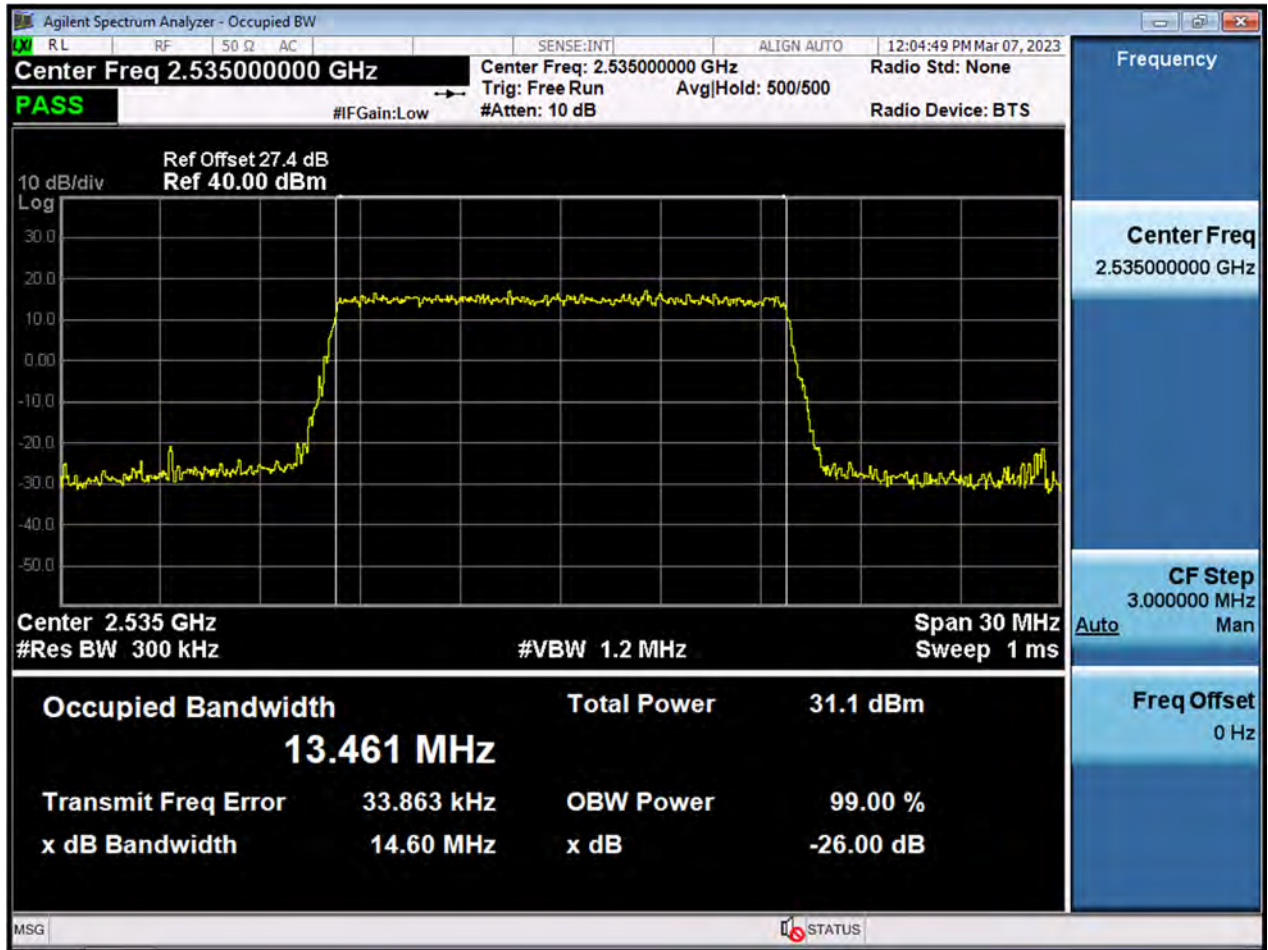




LTE7\_15 M\_OBW\_Mid Channel\_16QAM\_FullRB

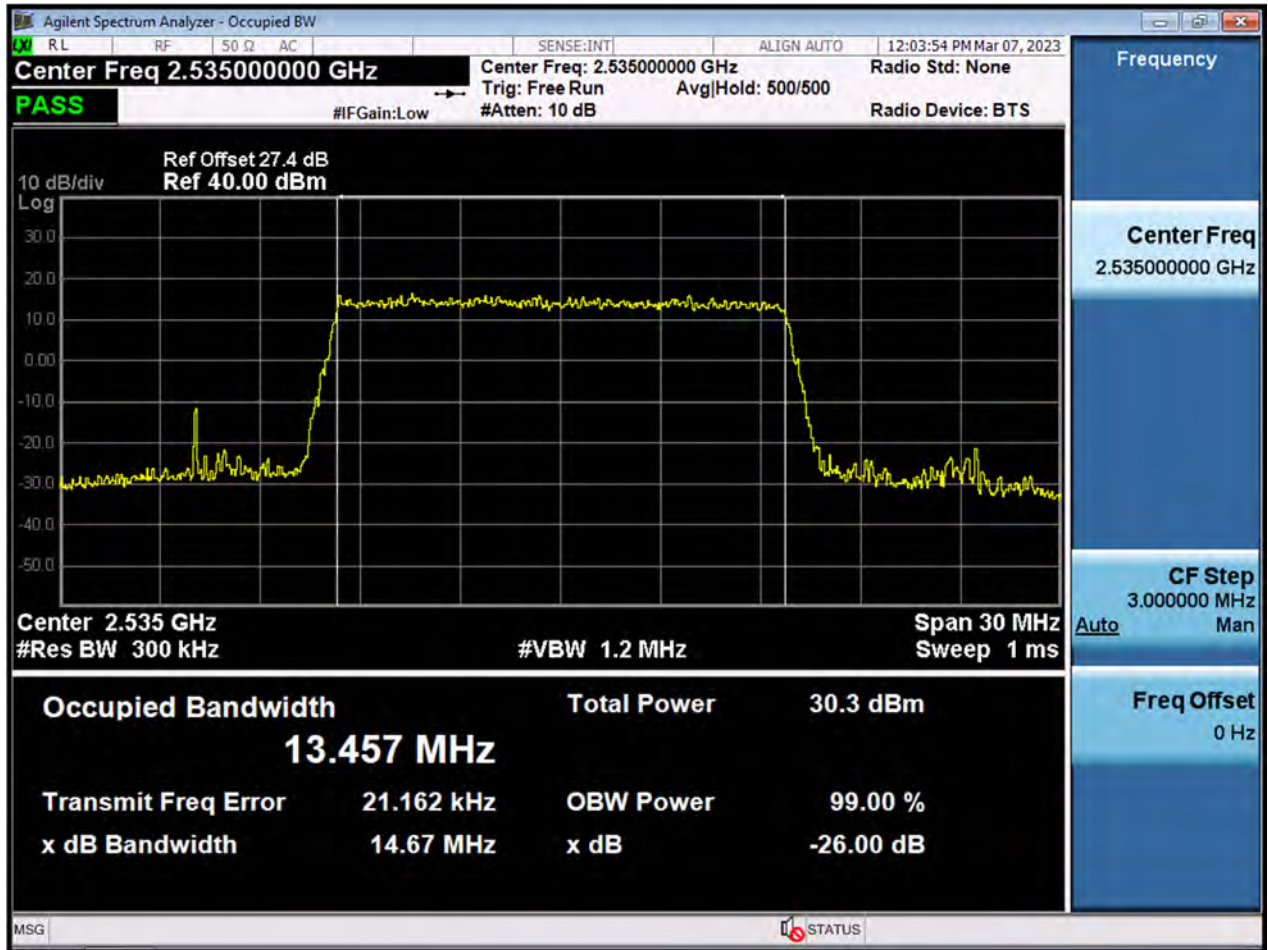




LTE7\_15 M\_OBW\_Mid Channel\_64QAM\_FullRB

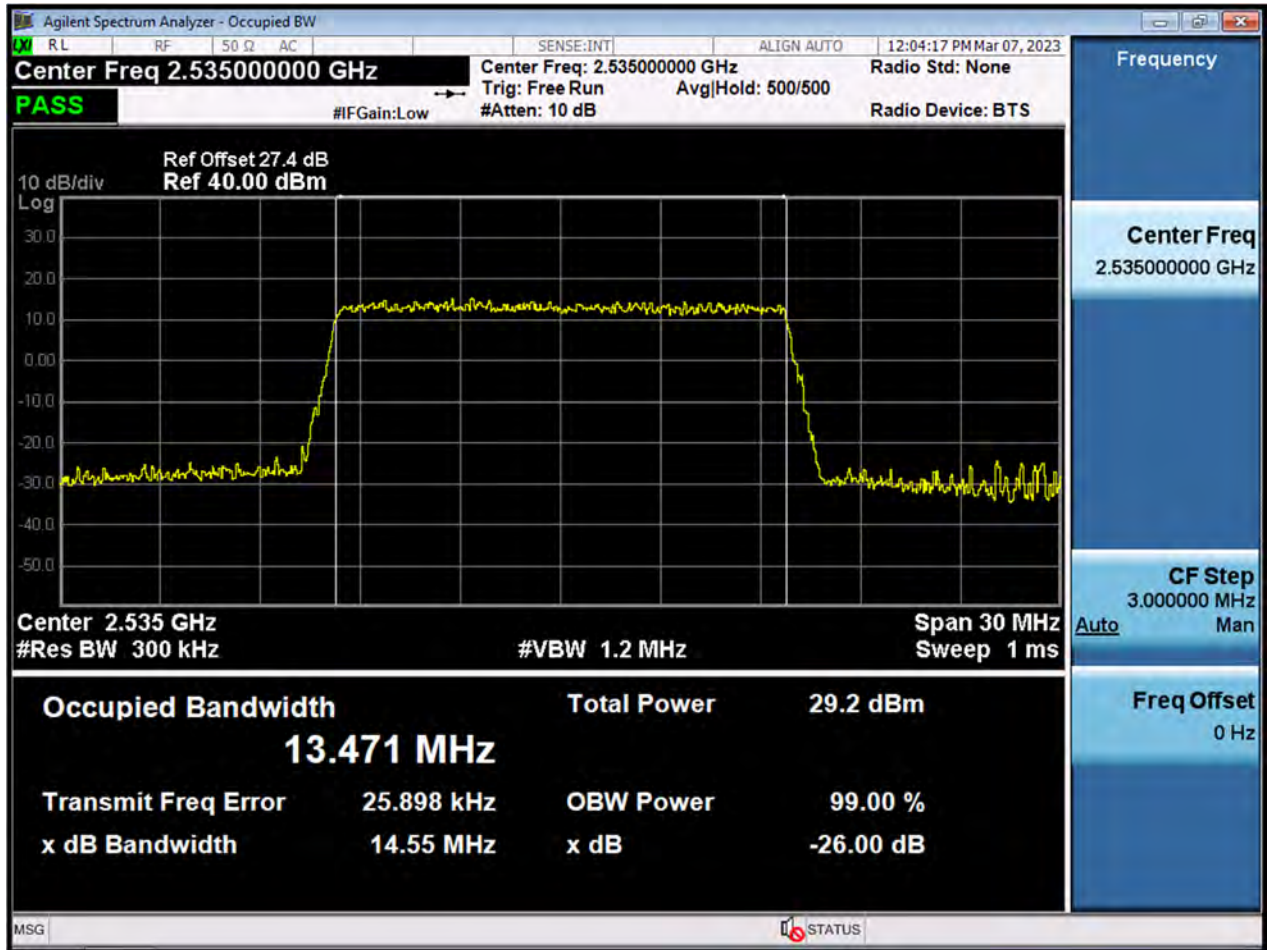






LTE7\_15 M\_OBW\_Mid Channel\_256QAM\_FullRB

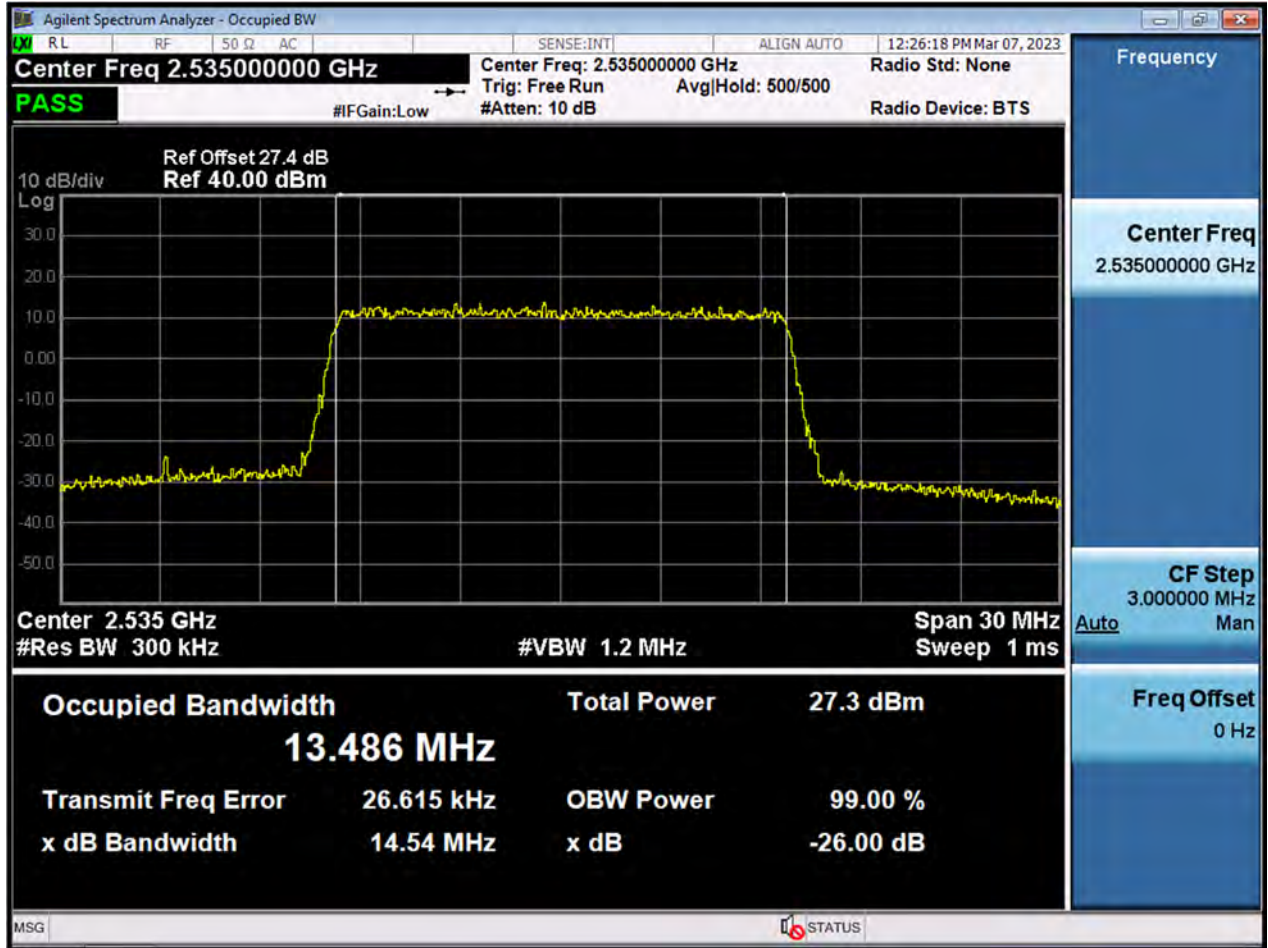




LTE7\_20 M\_OBW\_Mid Channel\_QPSK\_FullRB

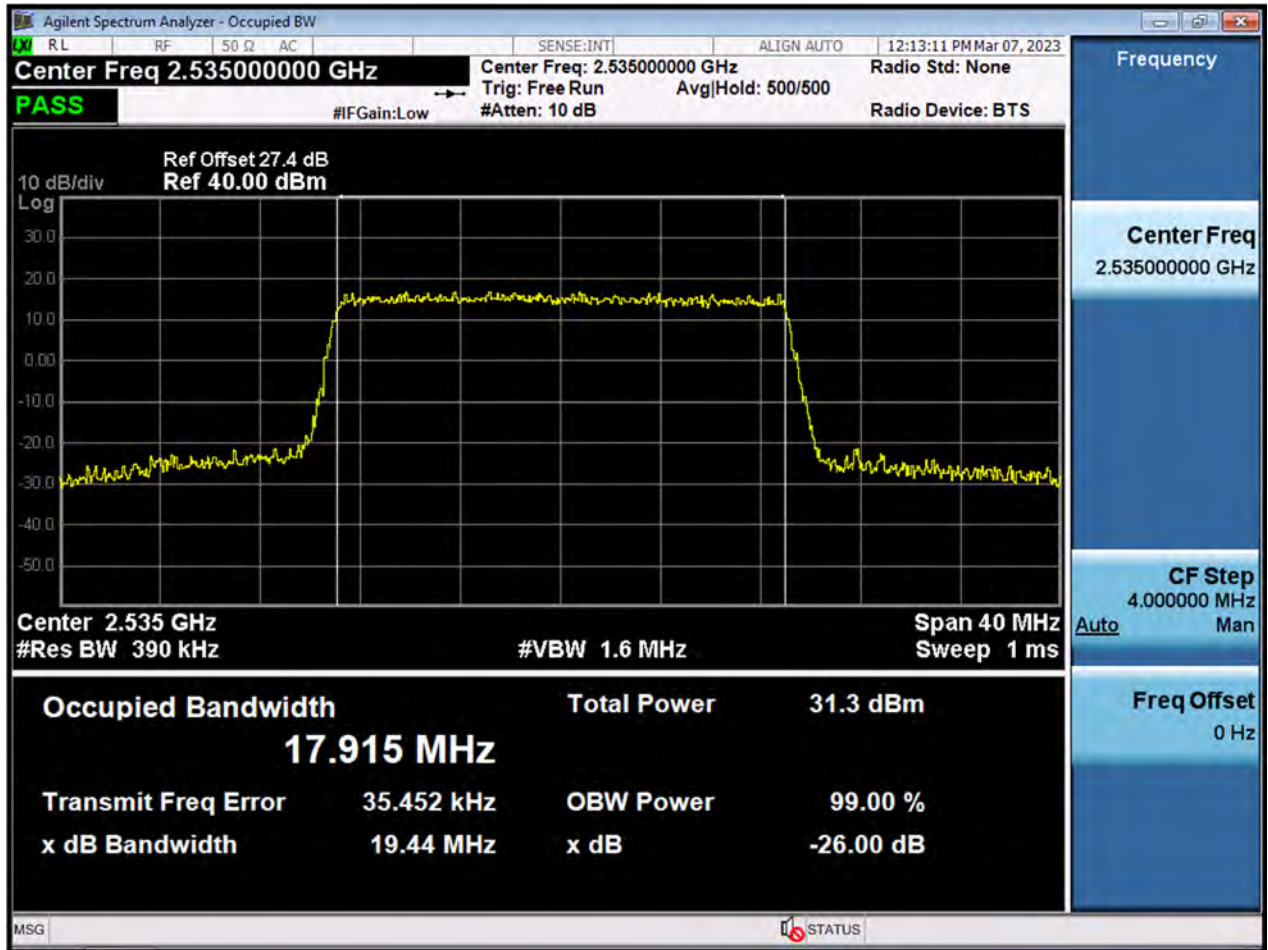




LTE7\_20 M\_OBW\_Mid Channel\_16QAM\_FullRB

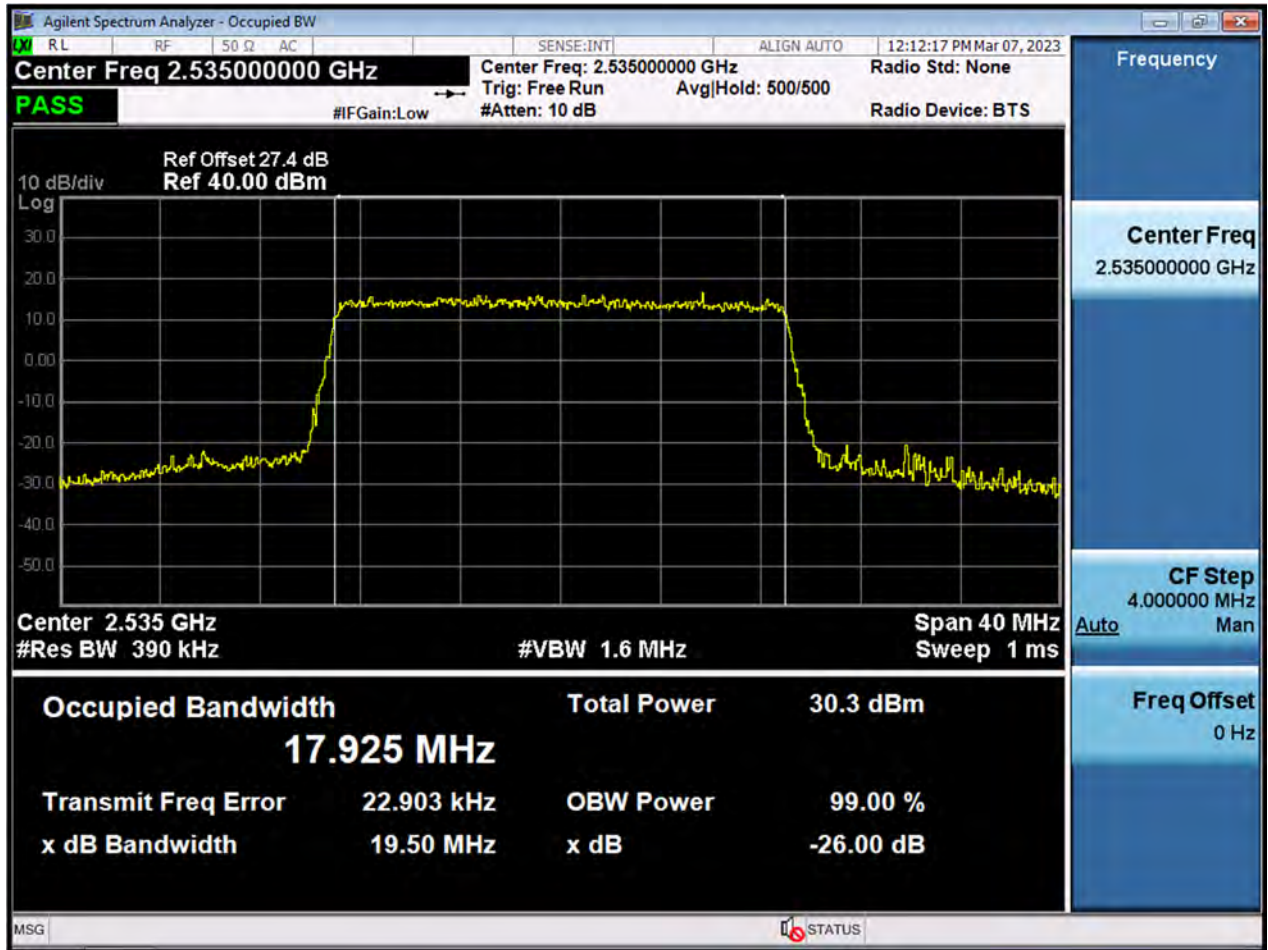




LTE7\_20 M\_OBW\_Mid Channel\_64QAM\_FullRB

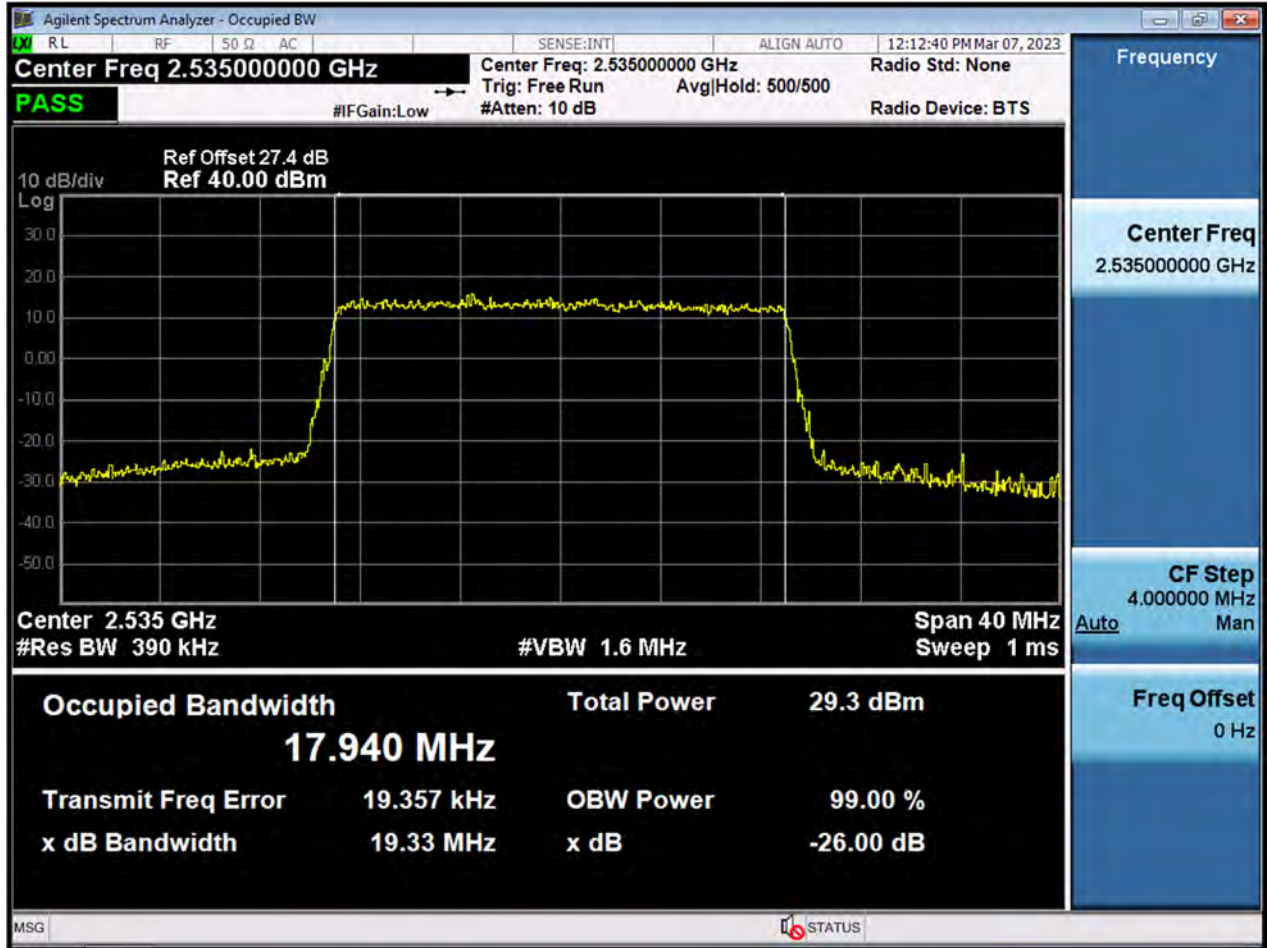






LTE7\_20 M\_OBW\_Mid Channel\_256QAM\_FullRB

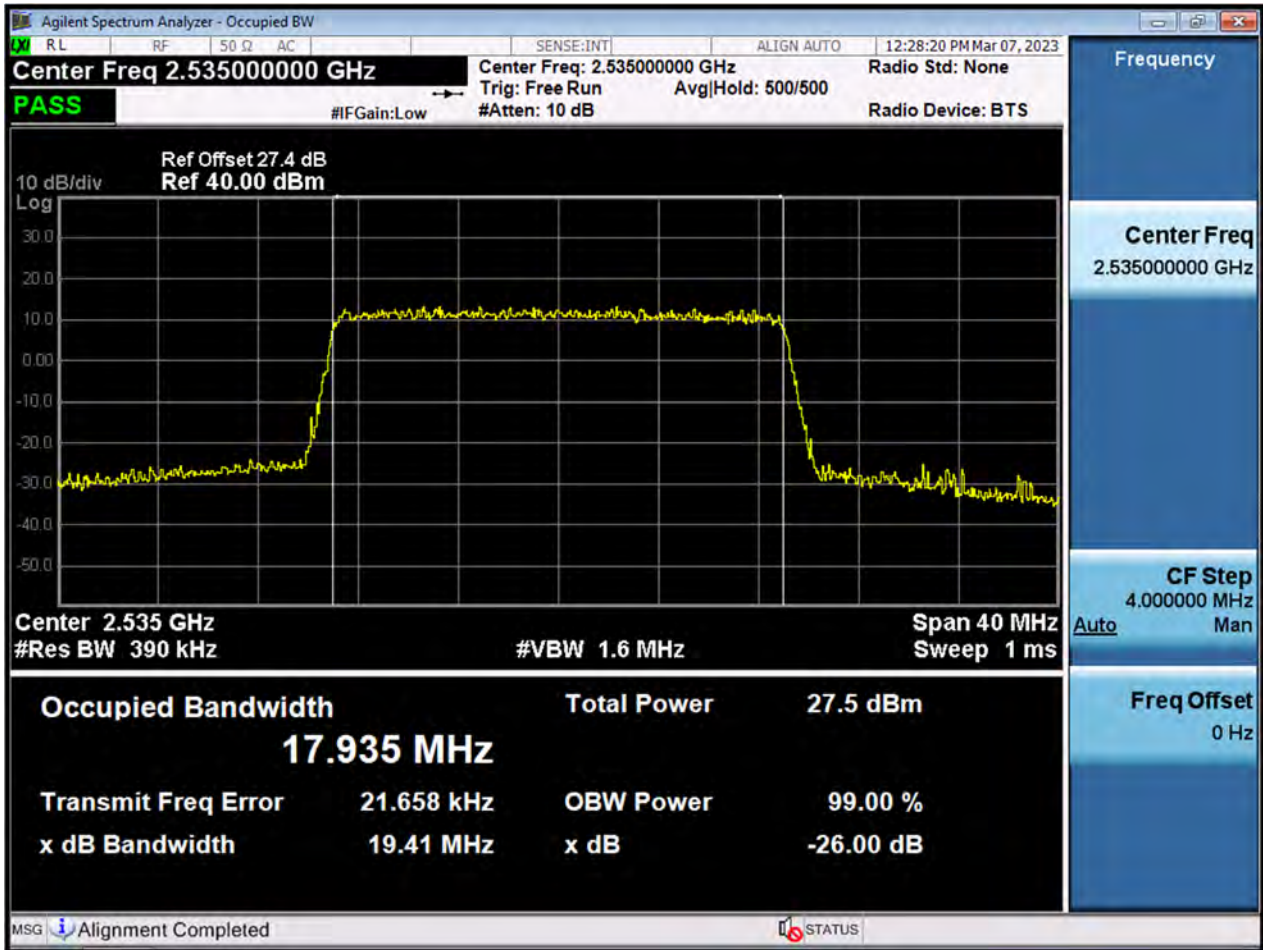




LTE7\_5 M\_PAR\_Mid Channel\_QPSK\_FullRB

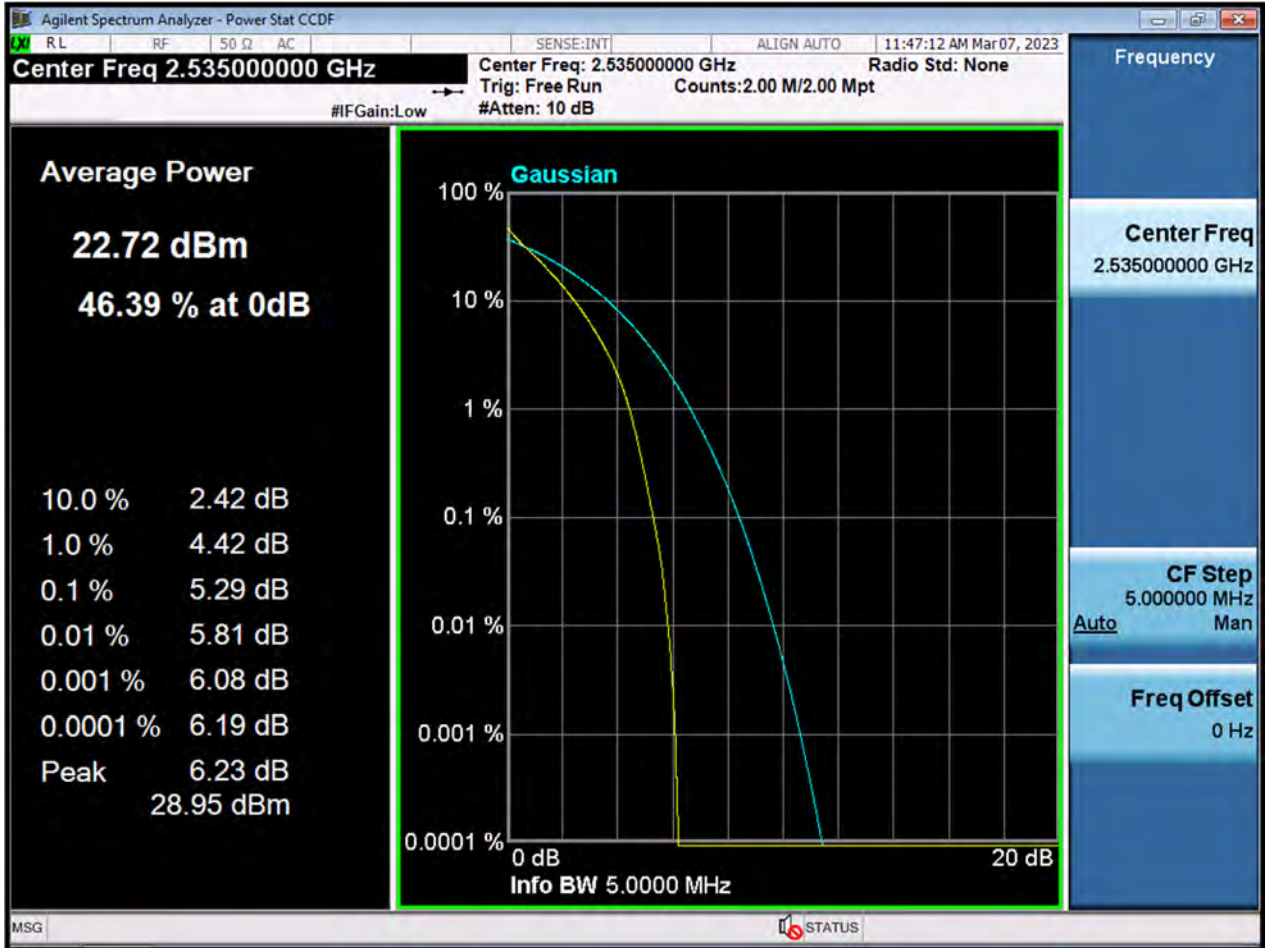




LTE7\_5 M\_PAR\_Mid Channel\_16QAM\_FullRB

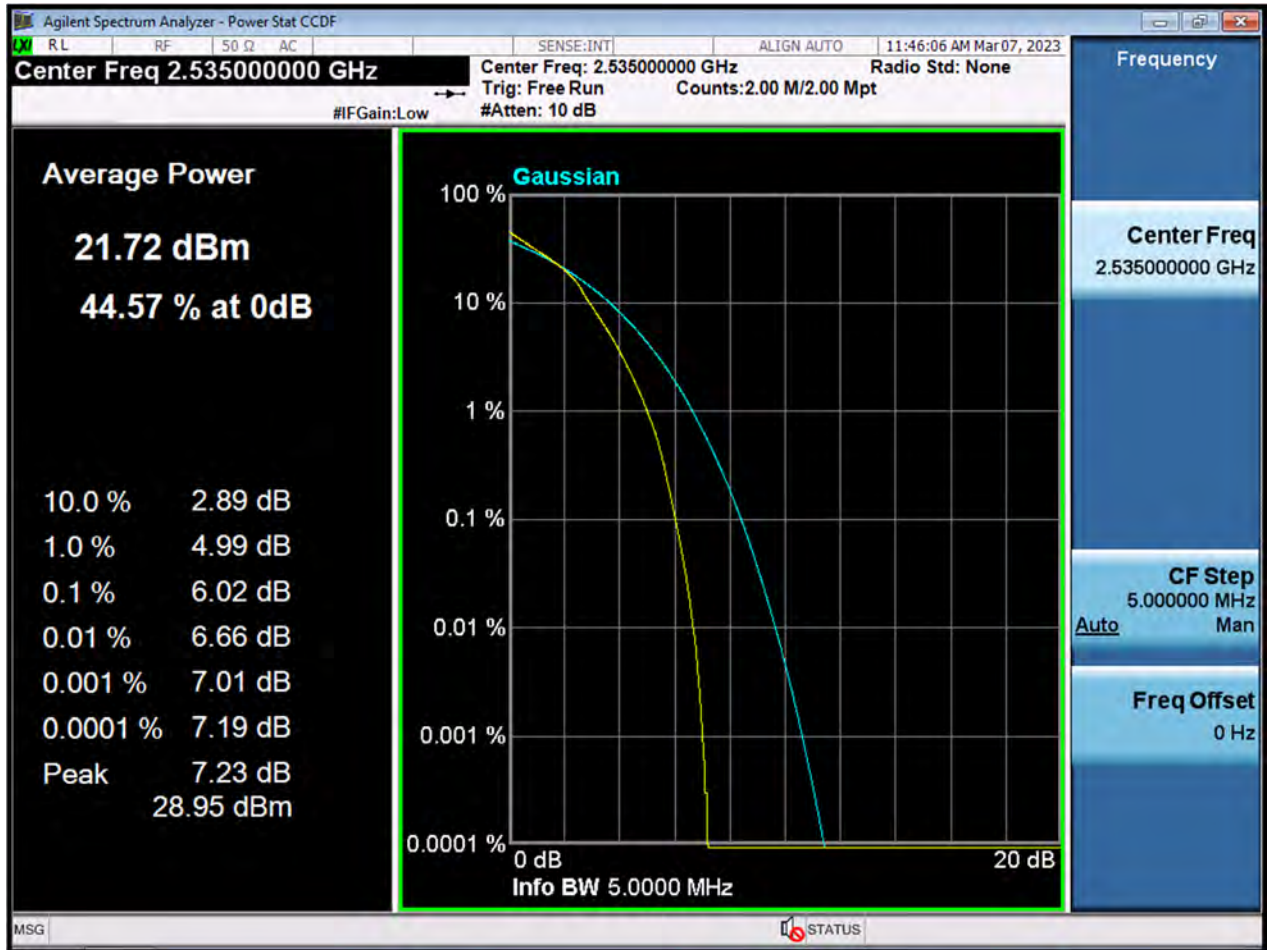




LTE7\_5 M\_PAR\_Mid Channel\_64QAM\_FullRB

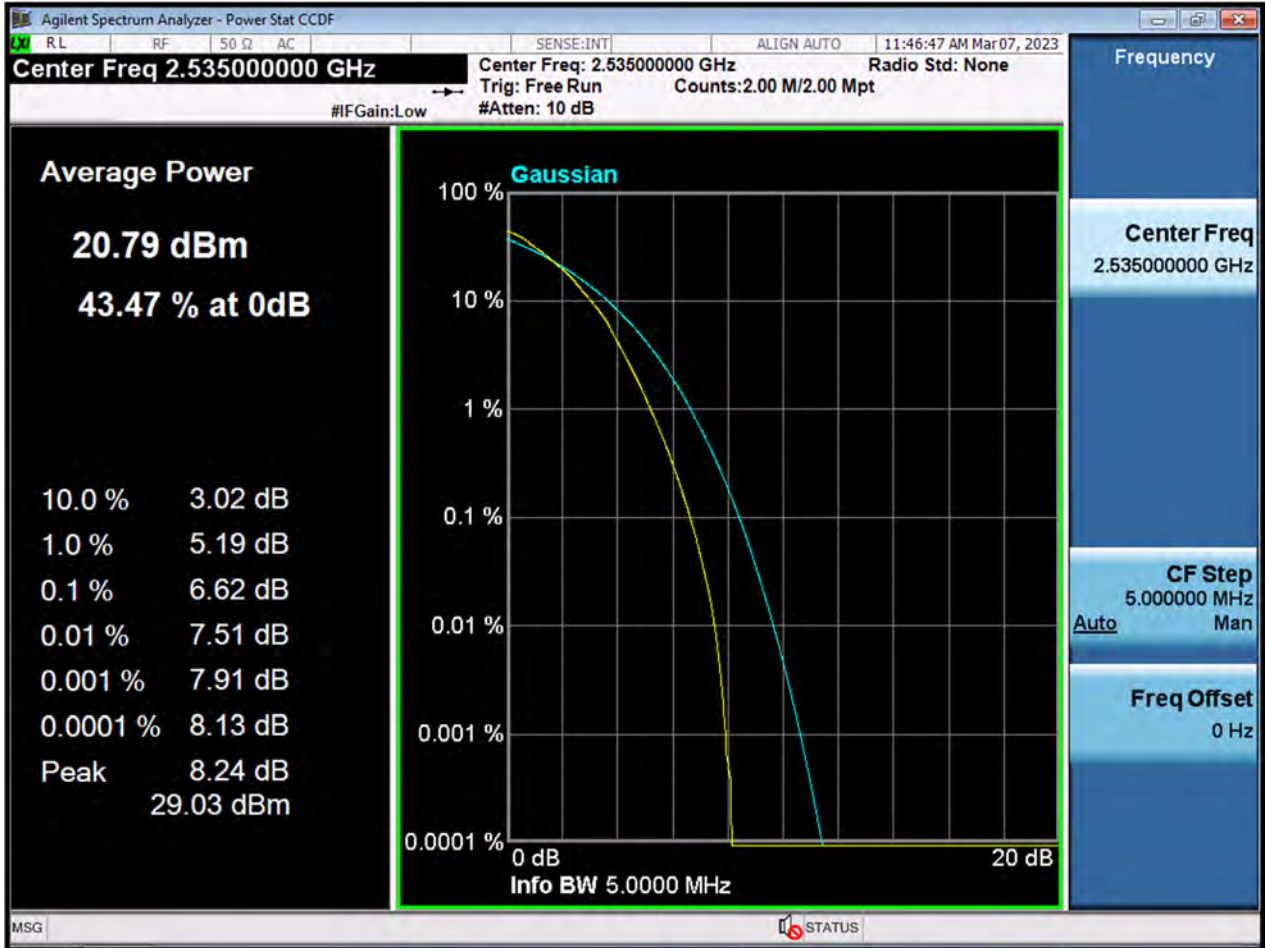






LTE7\_5 M\_PAR\_Mid Channel\_256QAM\_FullIRB

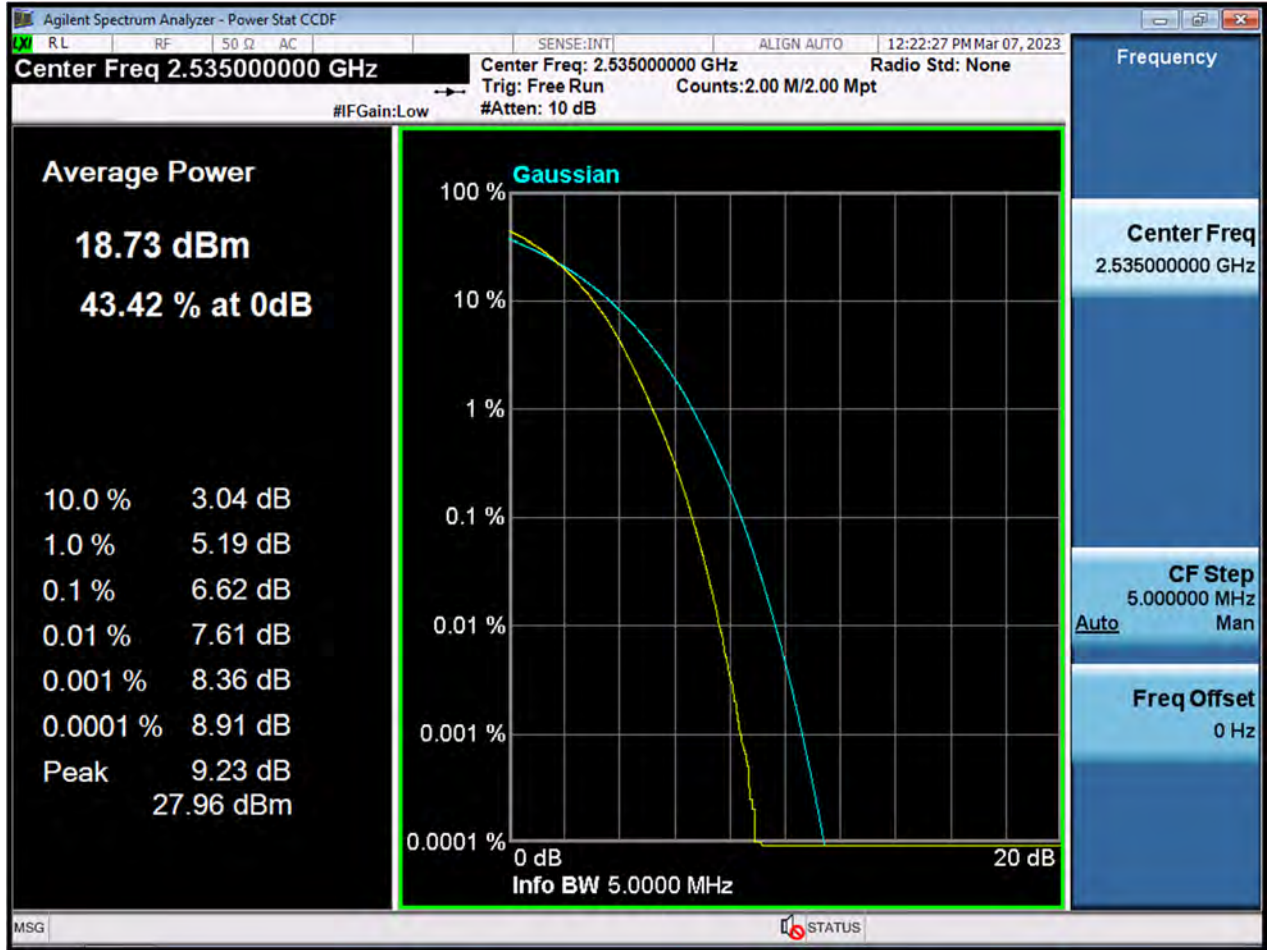




LTE7\_10 M\_PAR\_Mid Channel\_QPSK\_FullRB

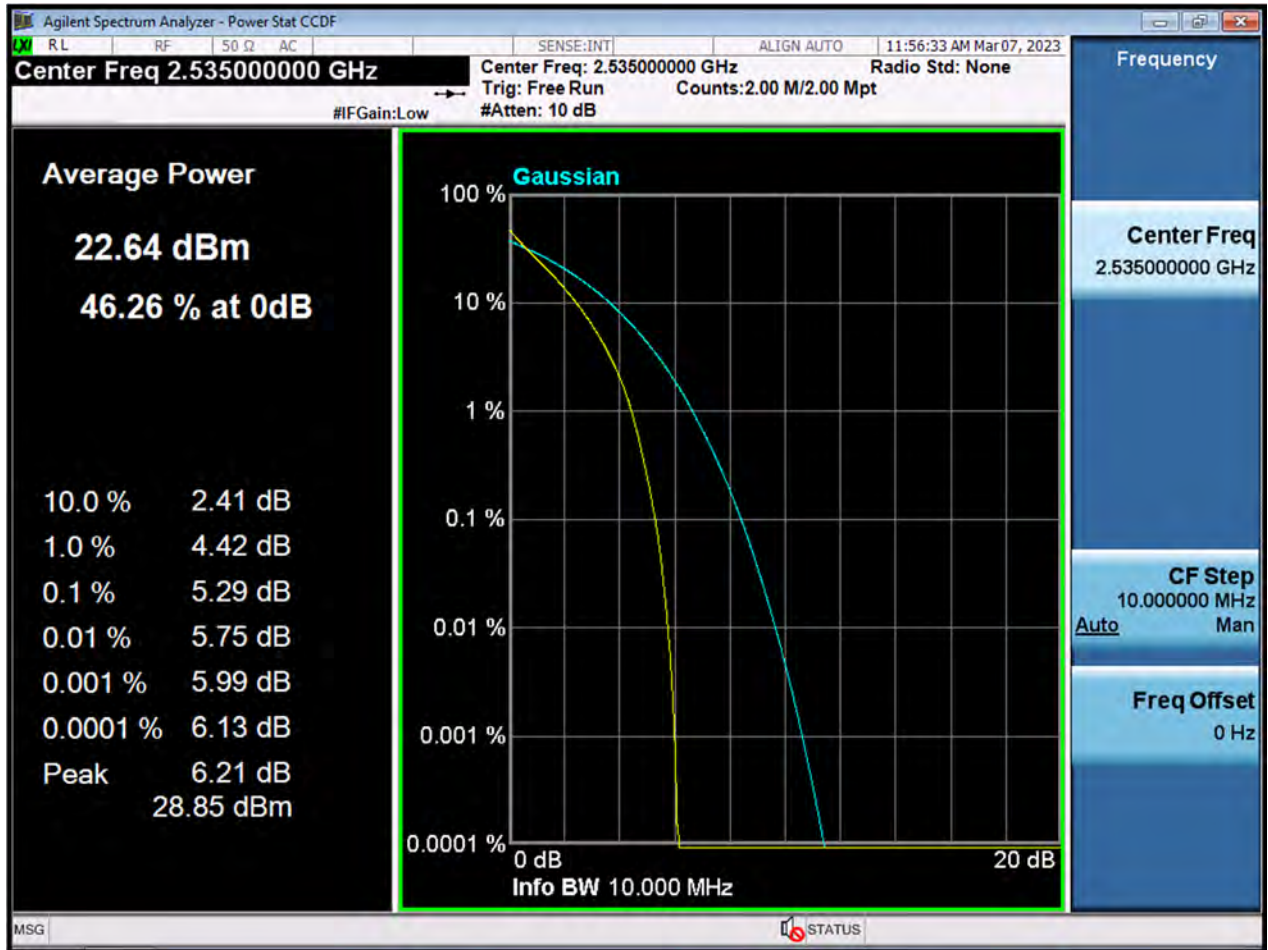




LTE7\_10 M\_PAR\_Mid Channel\_16QAM\_FullRB

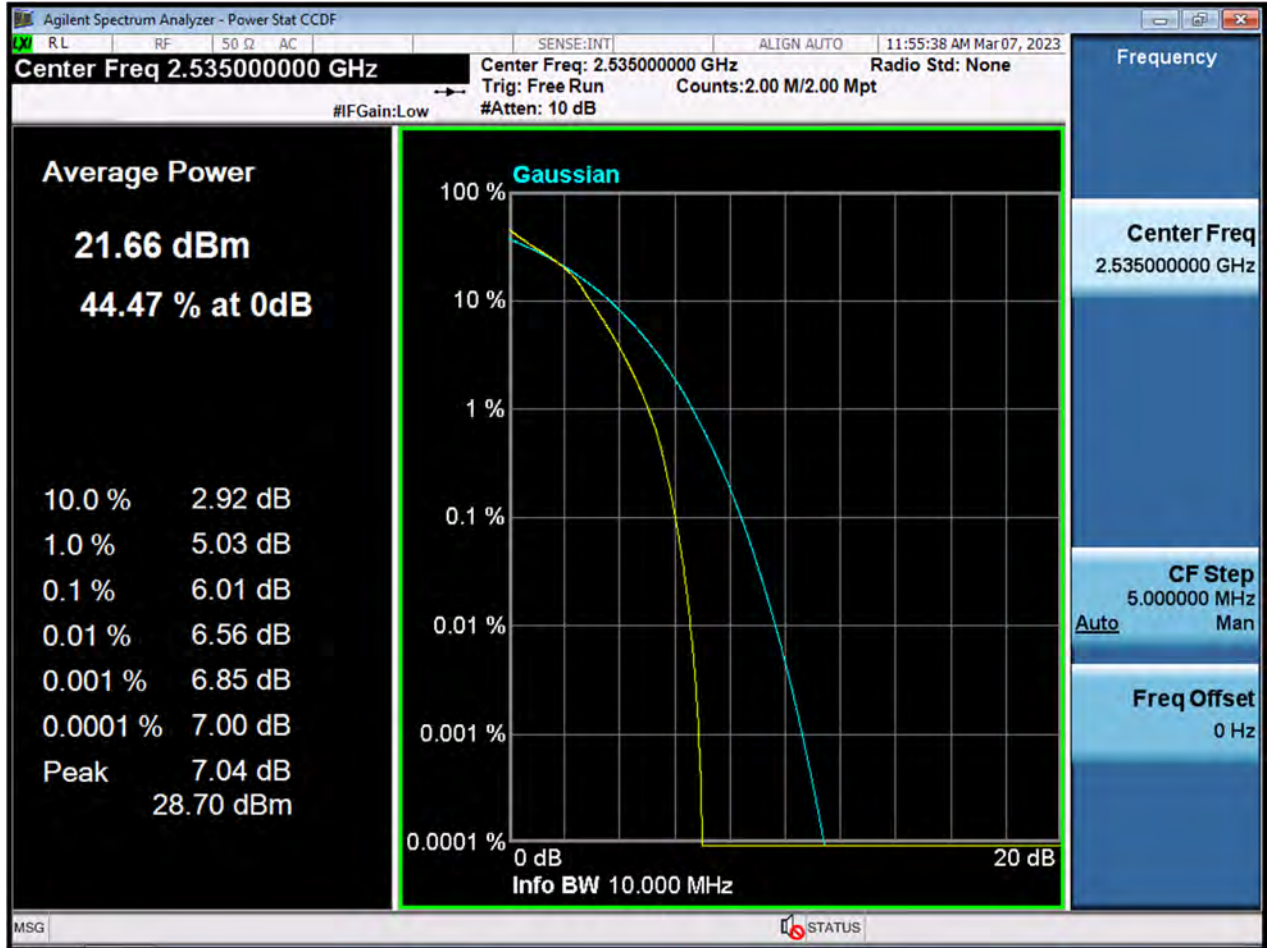




LTE7\_10 M\_PAR\_Mid Channel\_64QAM\_FullIRB

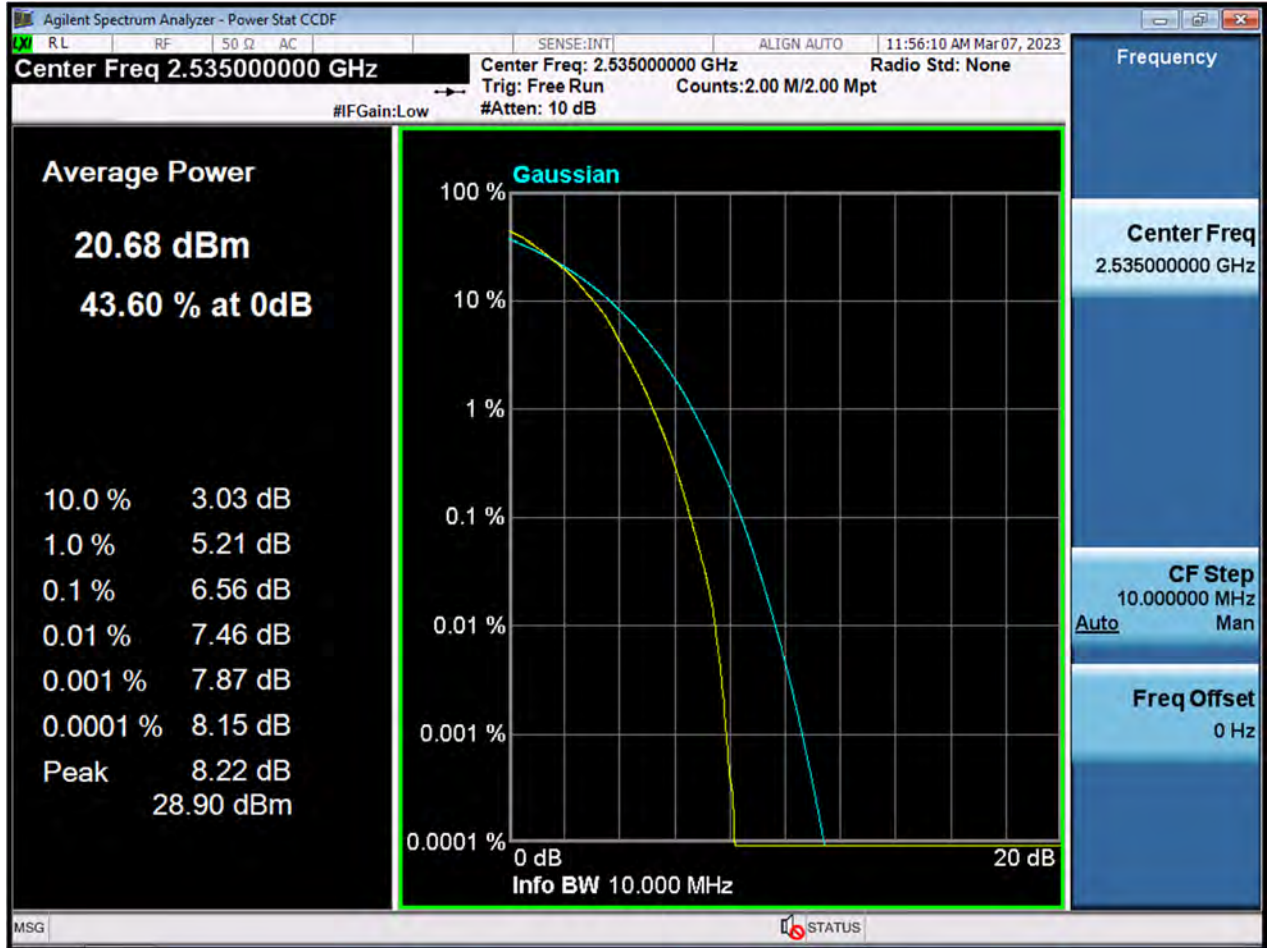




LTE7\_10 M\_PAR\_Mid Channel\_256QAM\_FullRB

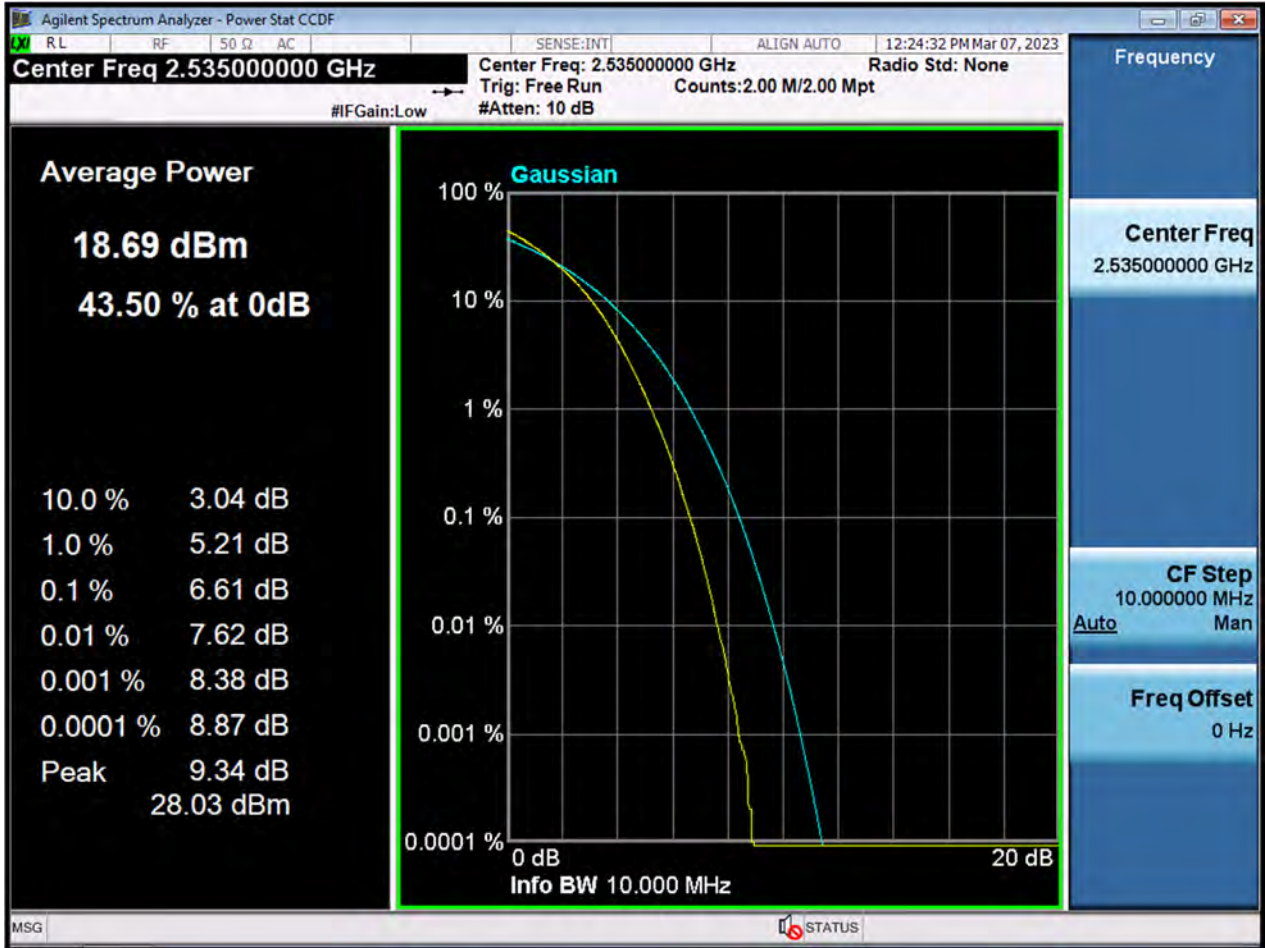






LTE7\_15 M\_PAR\_Mid Channel\_QPSK\_FullRB

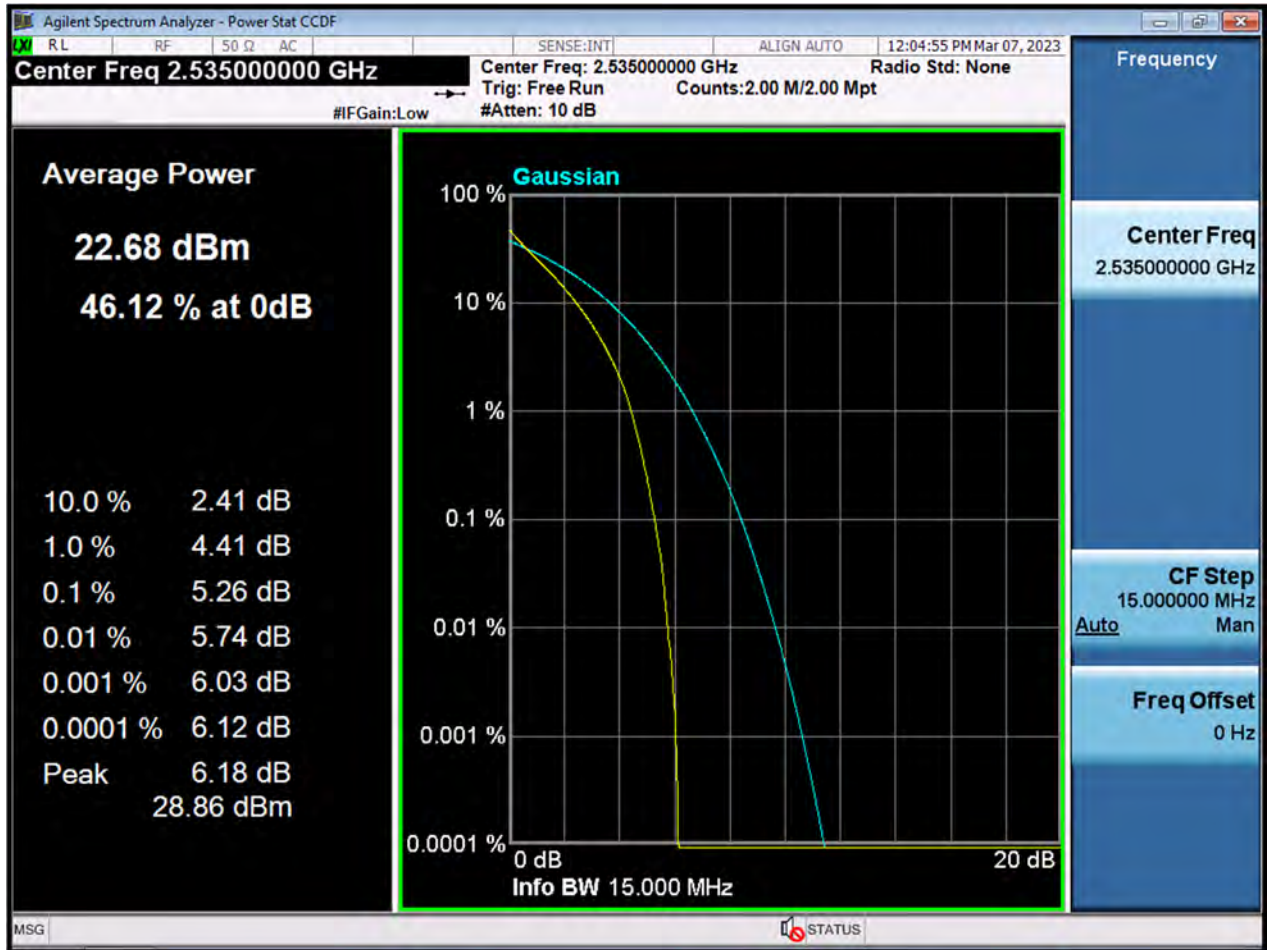




LTE7\_15 M\_PAR\_Mid Channel\_16QAM\_FullIRB

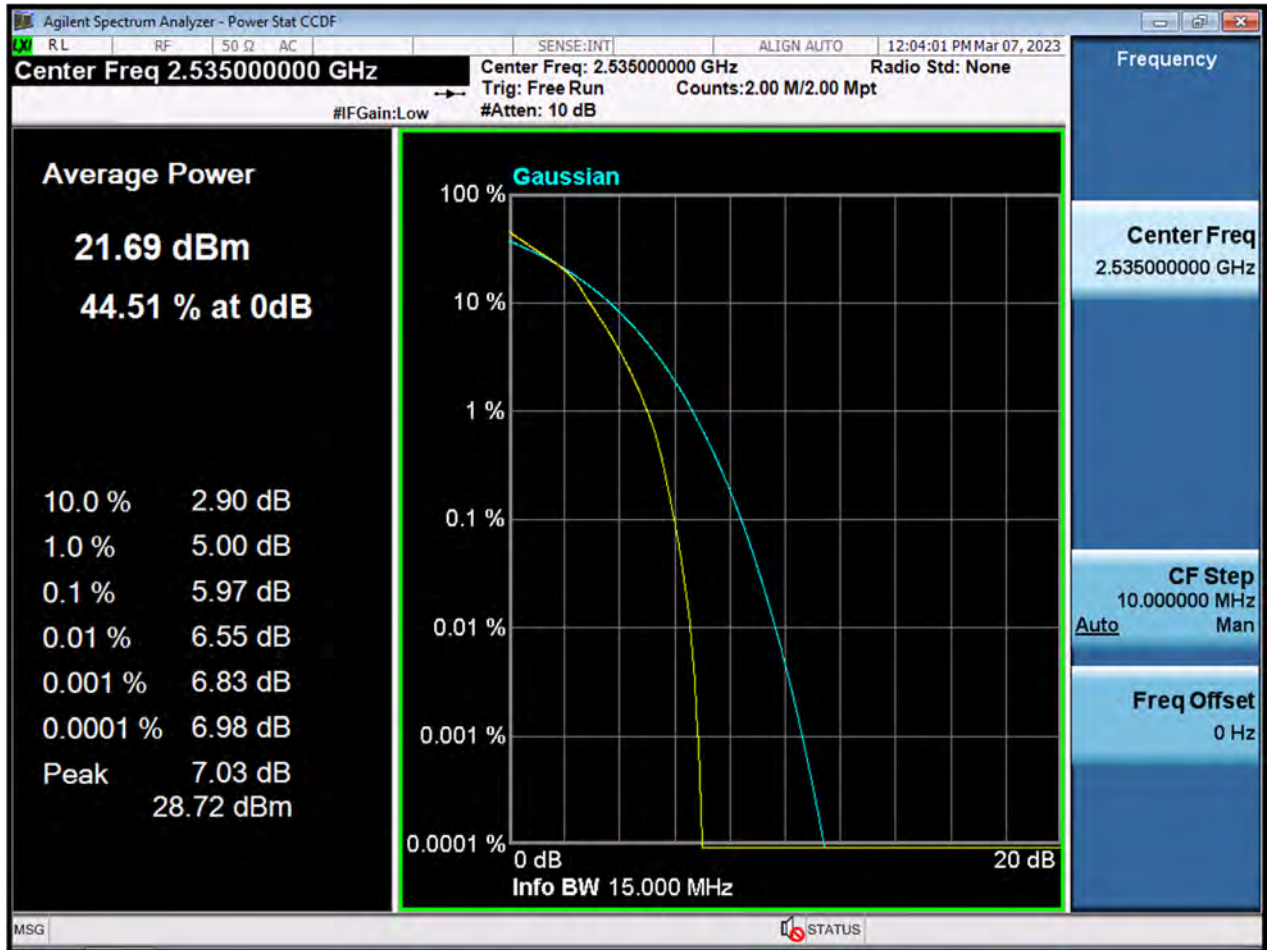




LTE7\_15 M\_PAR\_Mid Channel\_64QAM\_FullRB

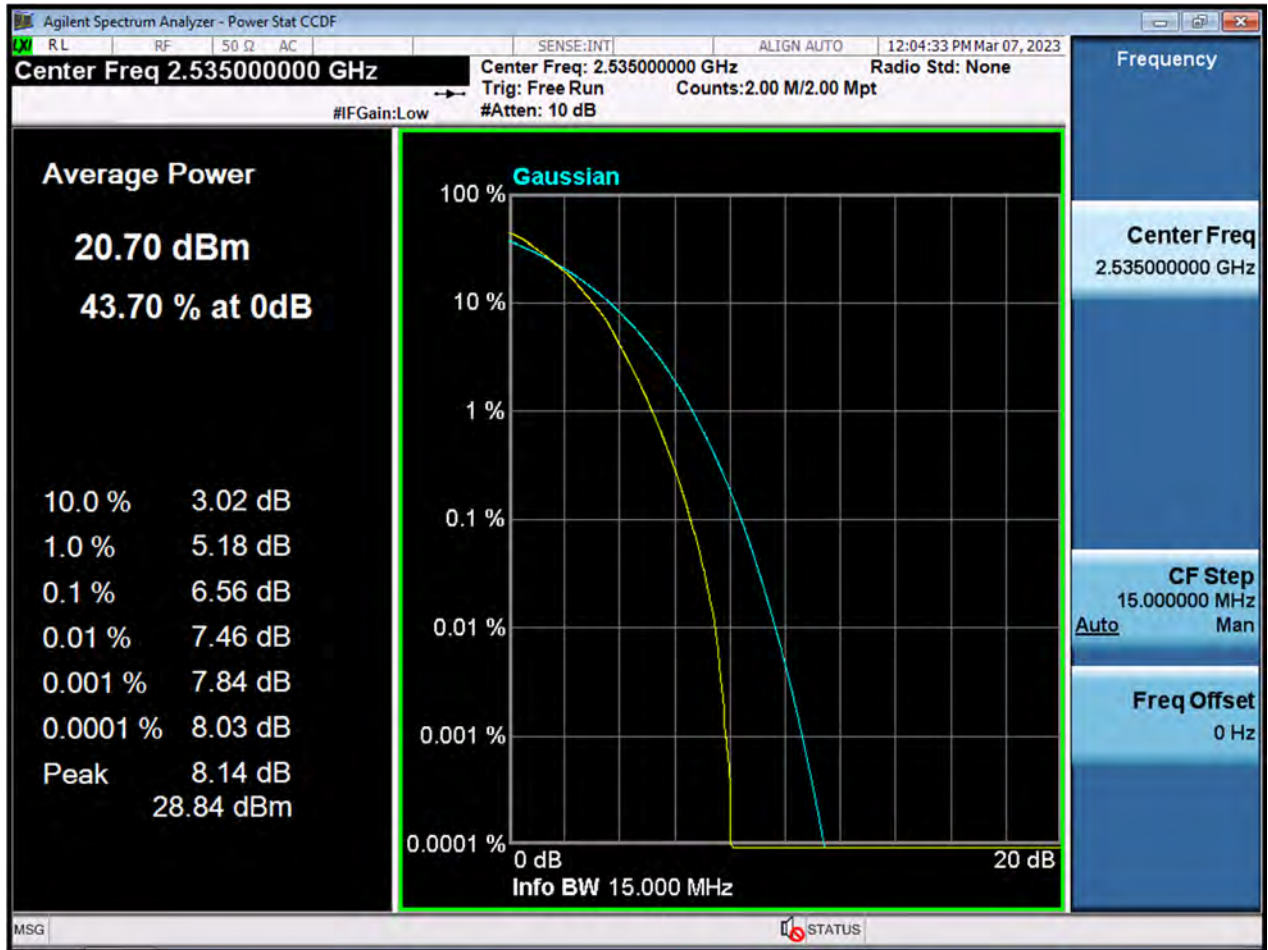






LTE7\_15 M\_PAR\_Mid Channel\_256QAM\_FullRB

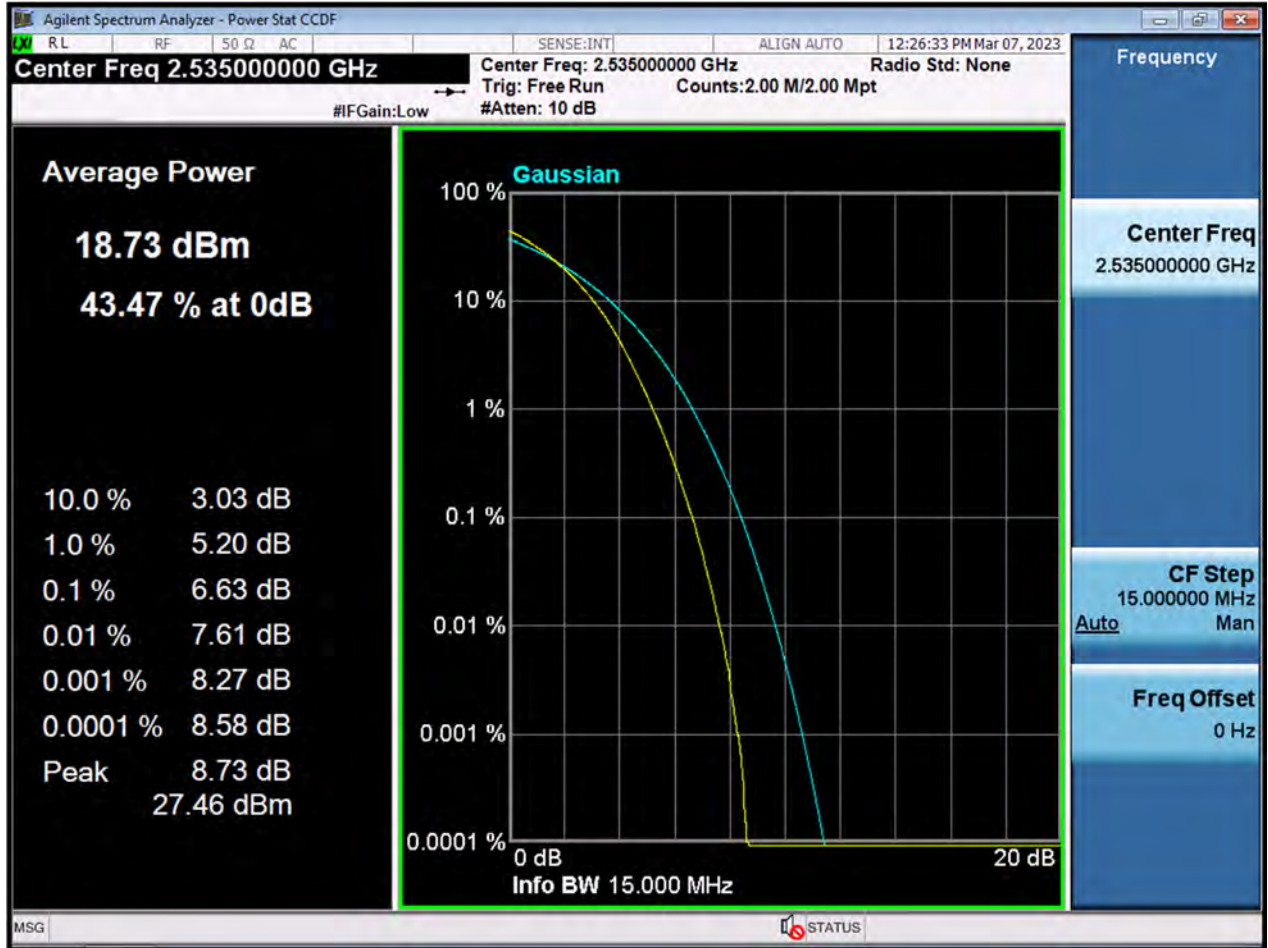




LTE7\_20 M\_PAR\_Mid Channel\_QPSK\_FullRB

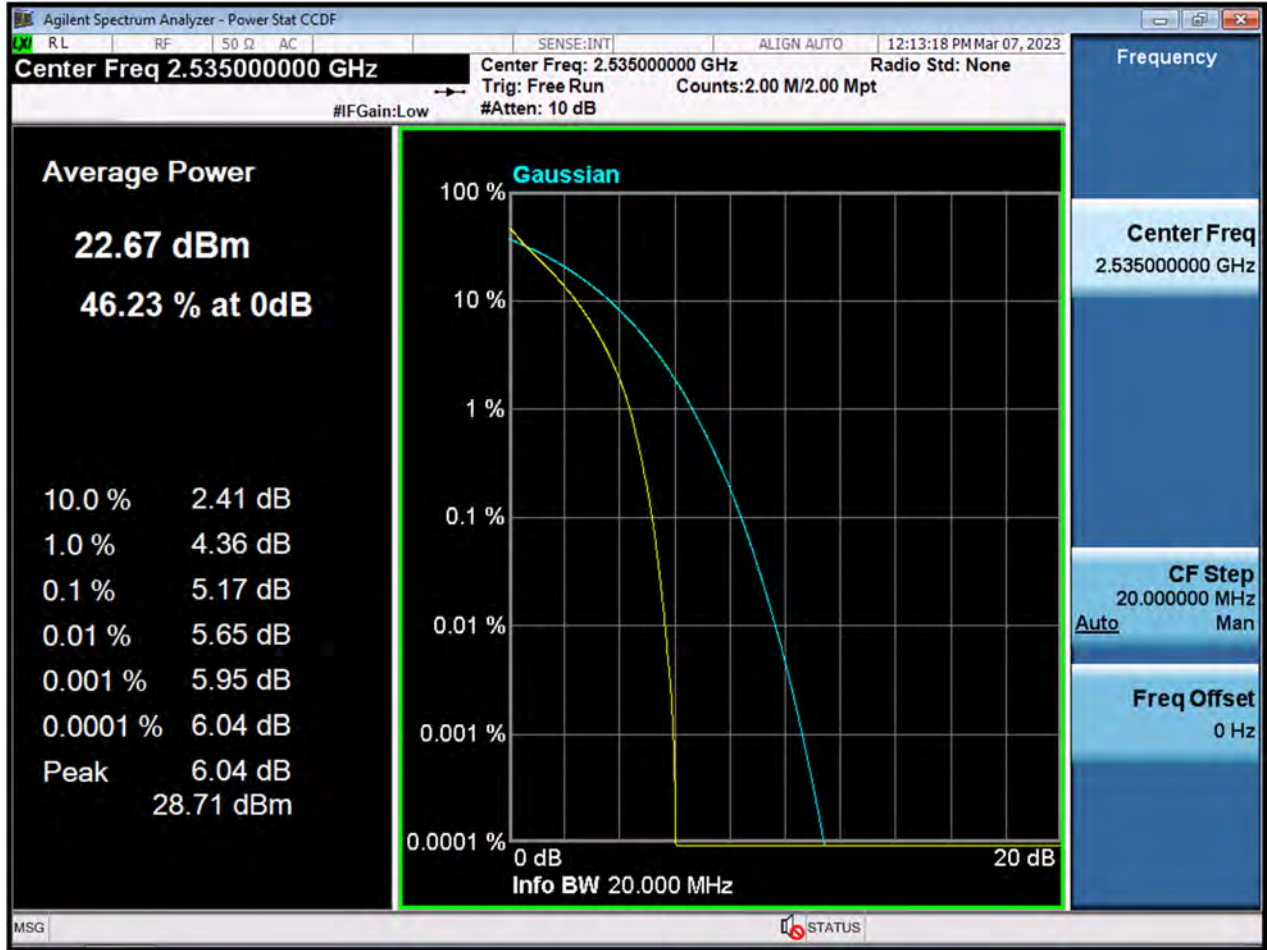




LTE7\_20 M\_PAR\_Mid Channel\_16QAM\_FullRB

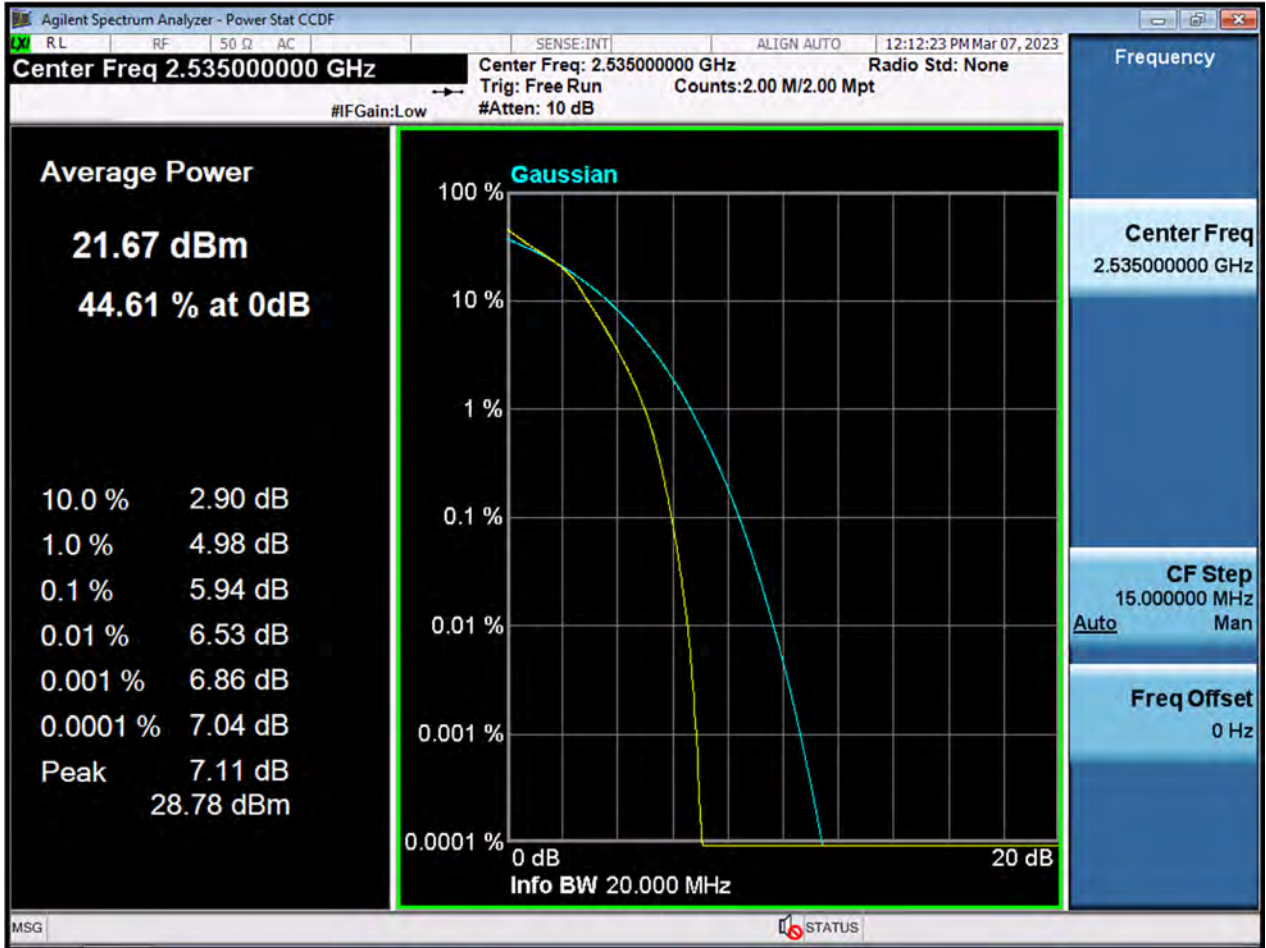




LTE7\_20 M\_PAR\_Mid Channel\_64QAM\_FullIRB

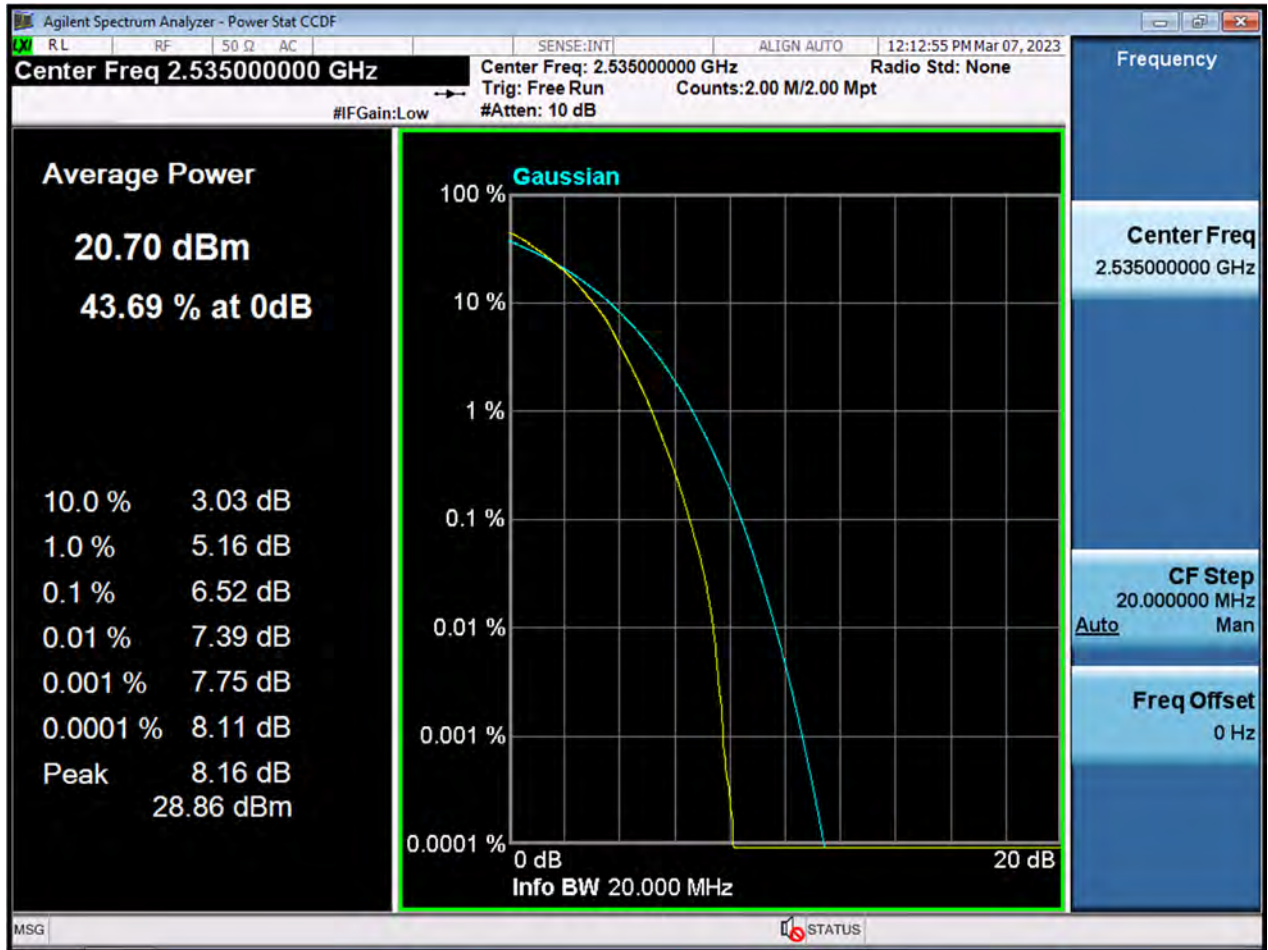




LTE7\_20 M\_PAR\_Mid Channel\_256QAM\_FullRB

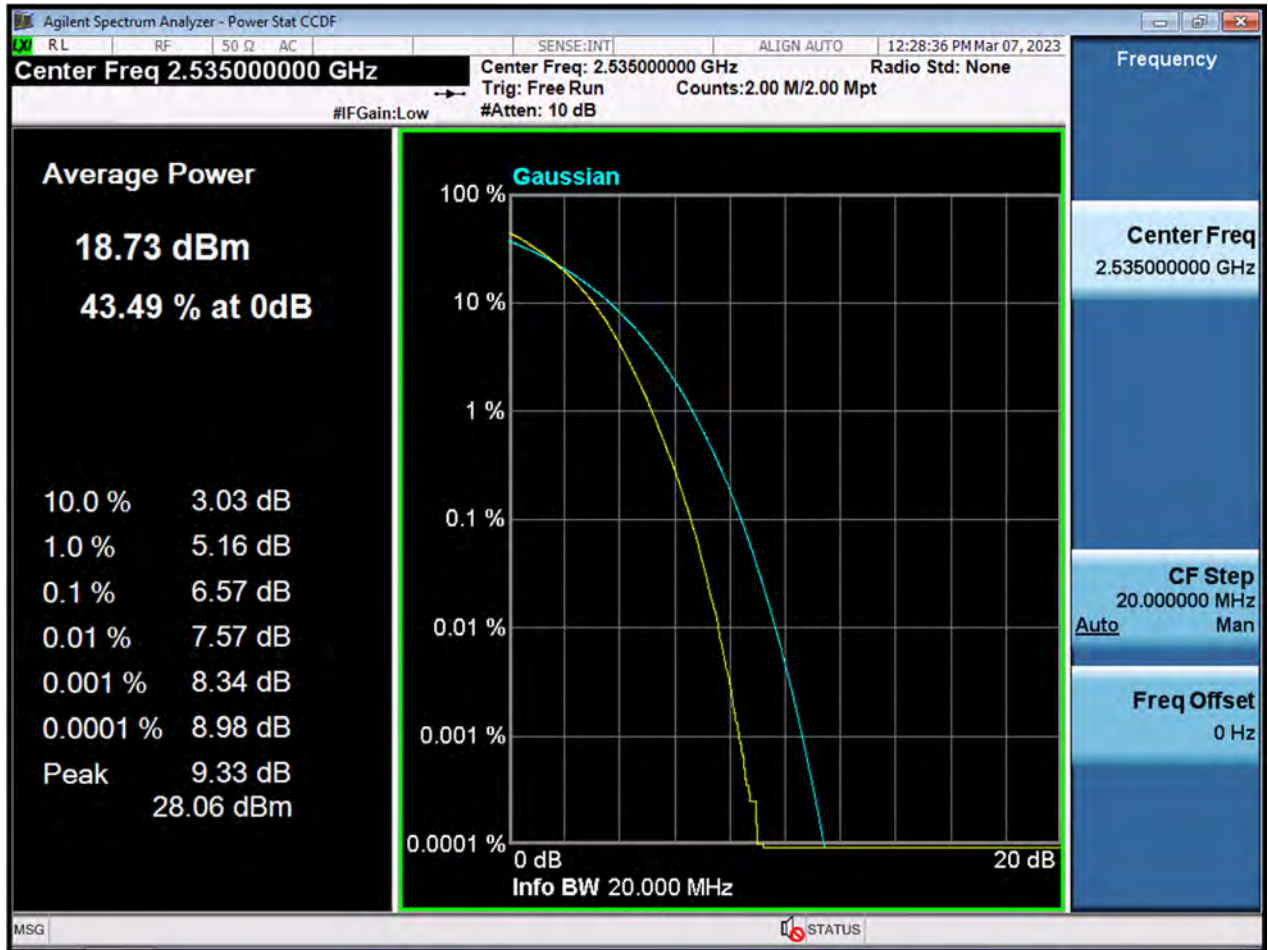






LTE7\_5 M\_CSE(30 M-10 G)\_Lowest Channel

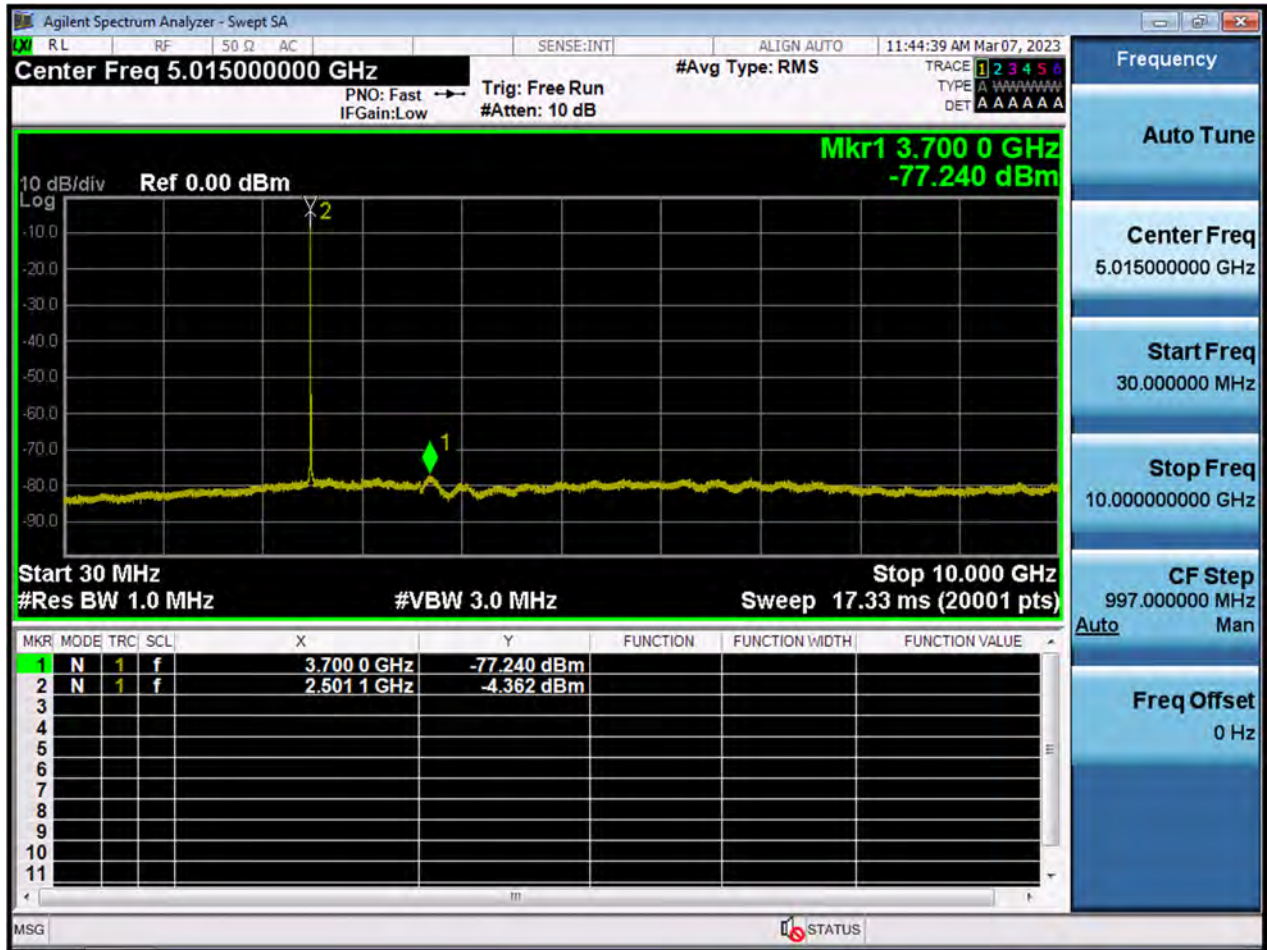


LTE7\_5 M\_CSE(30 M-10 G)\_Mid Channel

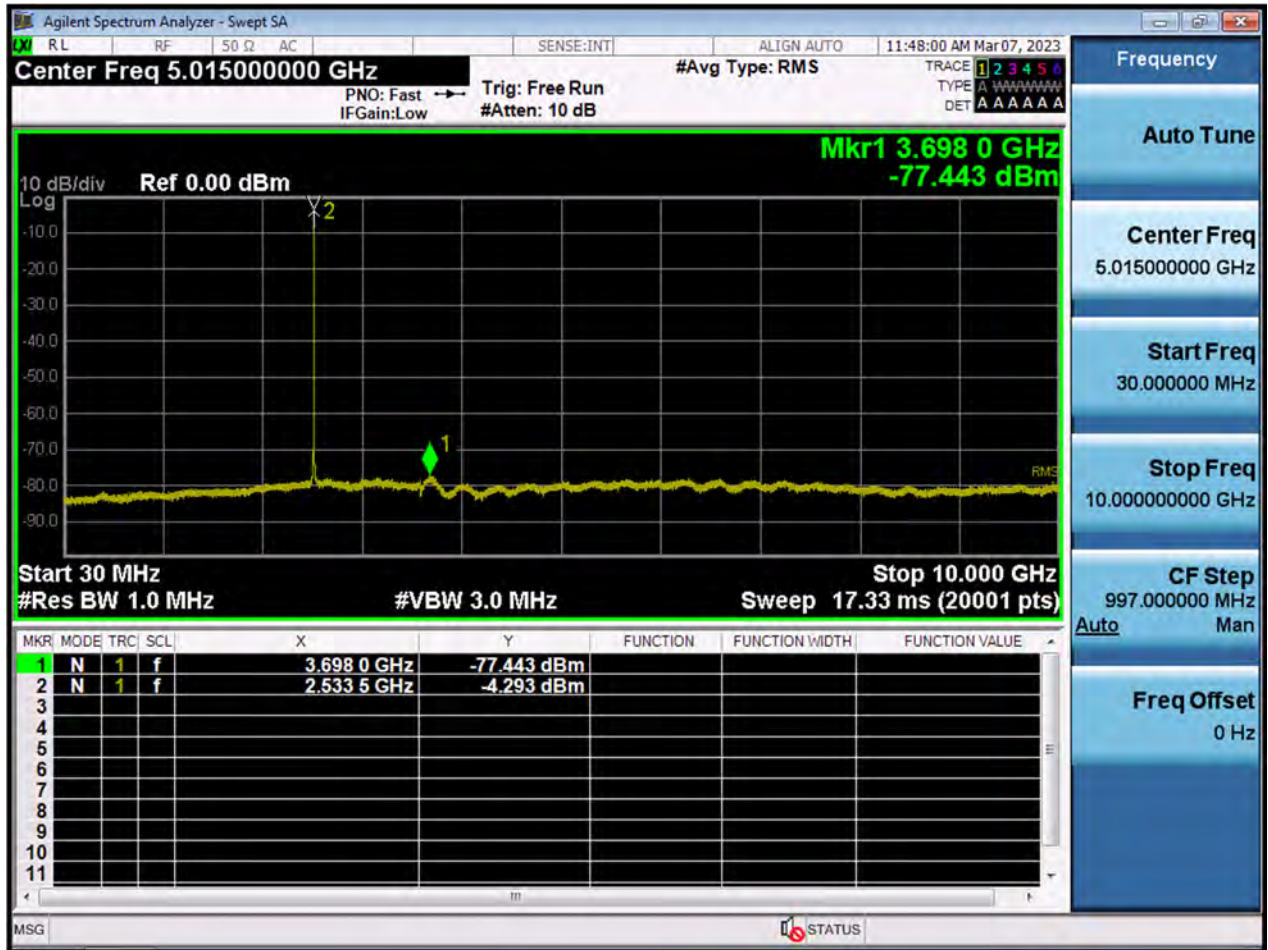




LTE7\_5 M\_CSE(30 M-10 G)\_Highest Channel

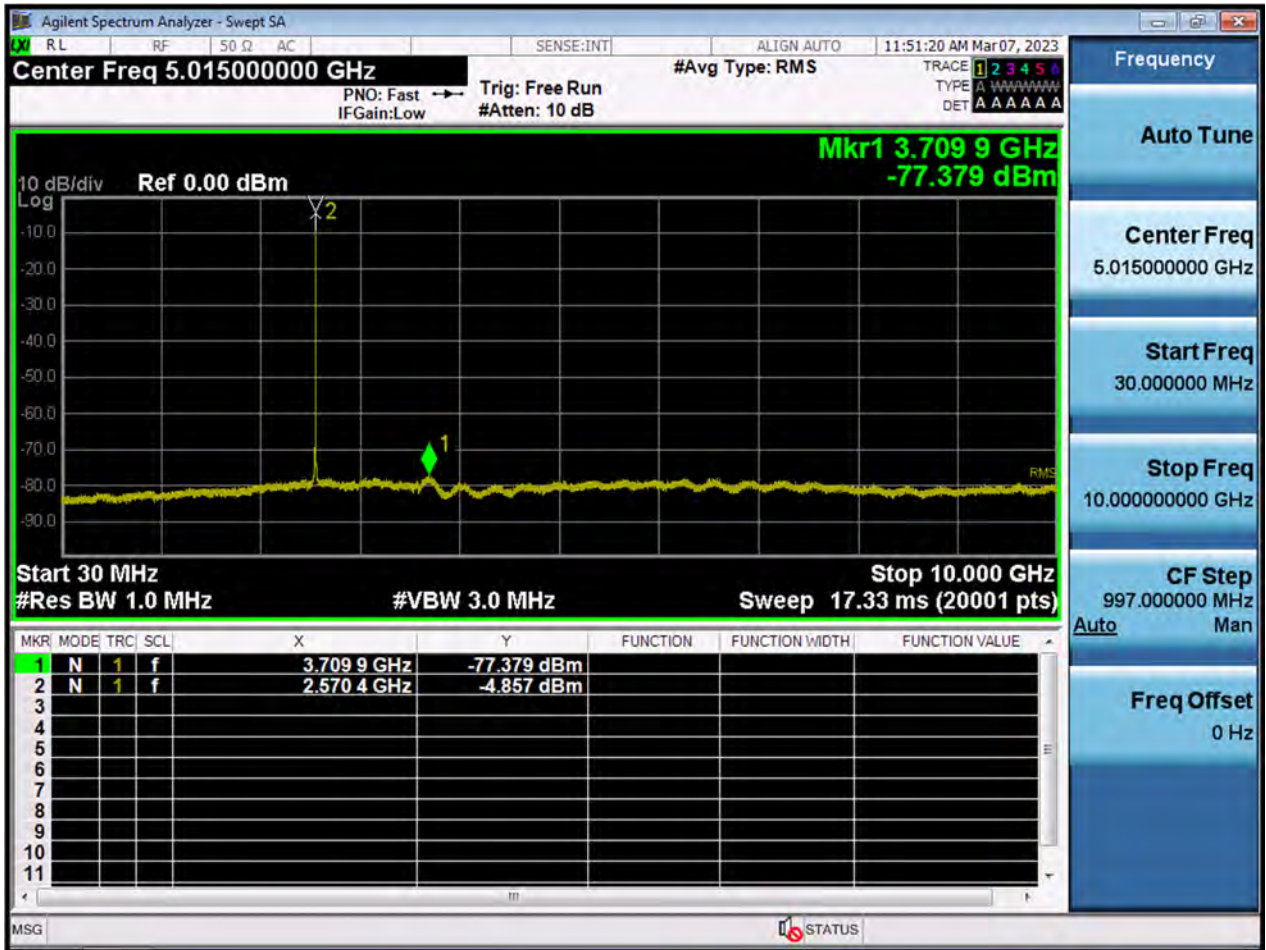






LTE7\_10 M\_CSE(30 M-10 G)\_Lowest Channel

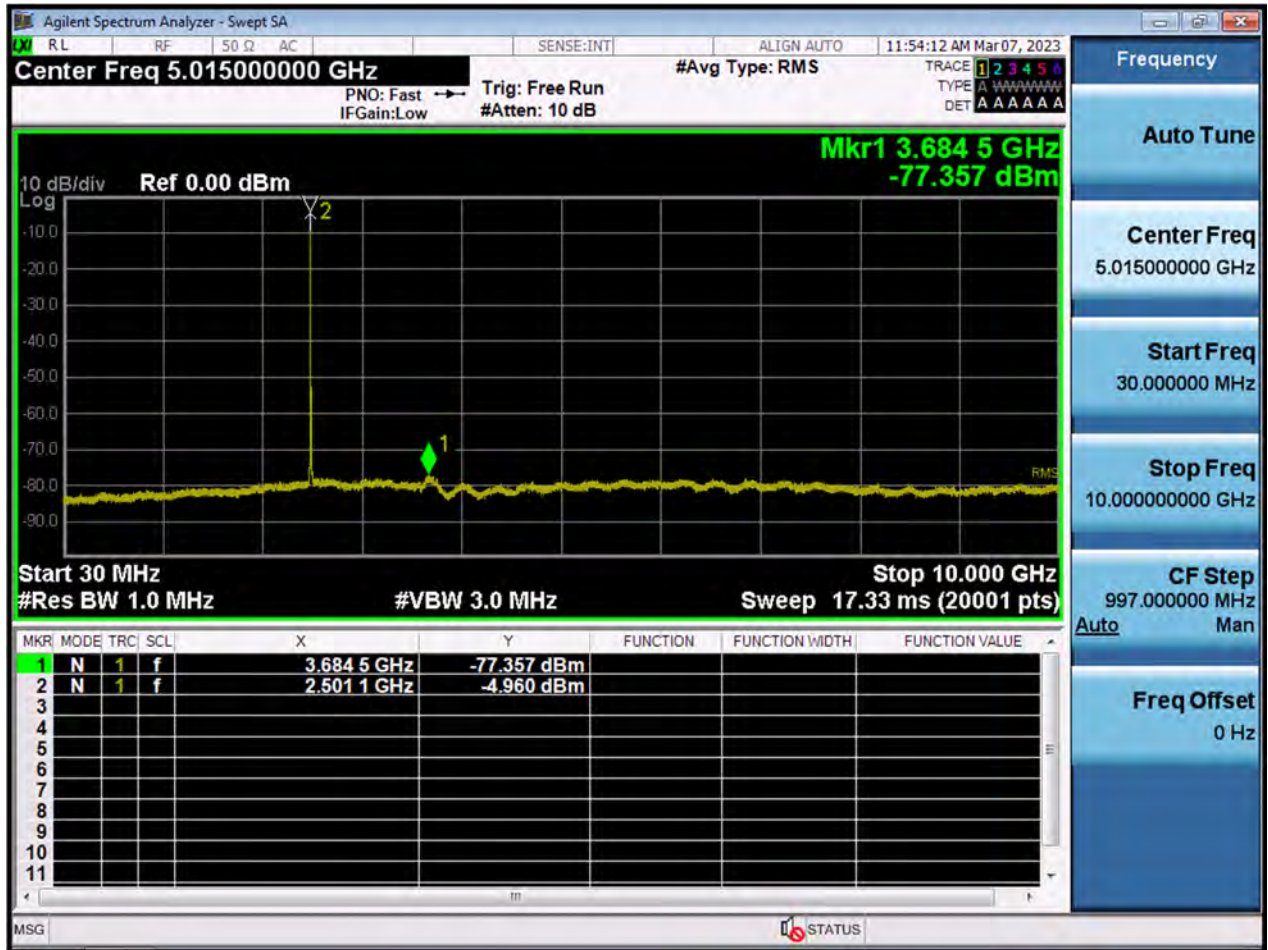




LTE7\_10 M\_CSE(30 M-10 G)\_Mid Channel

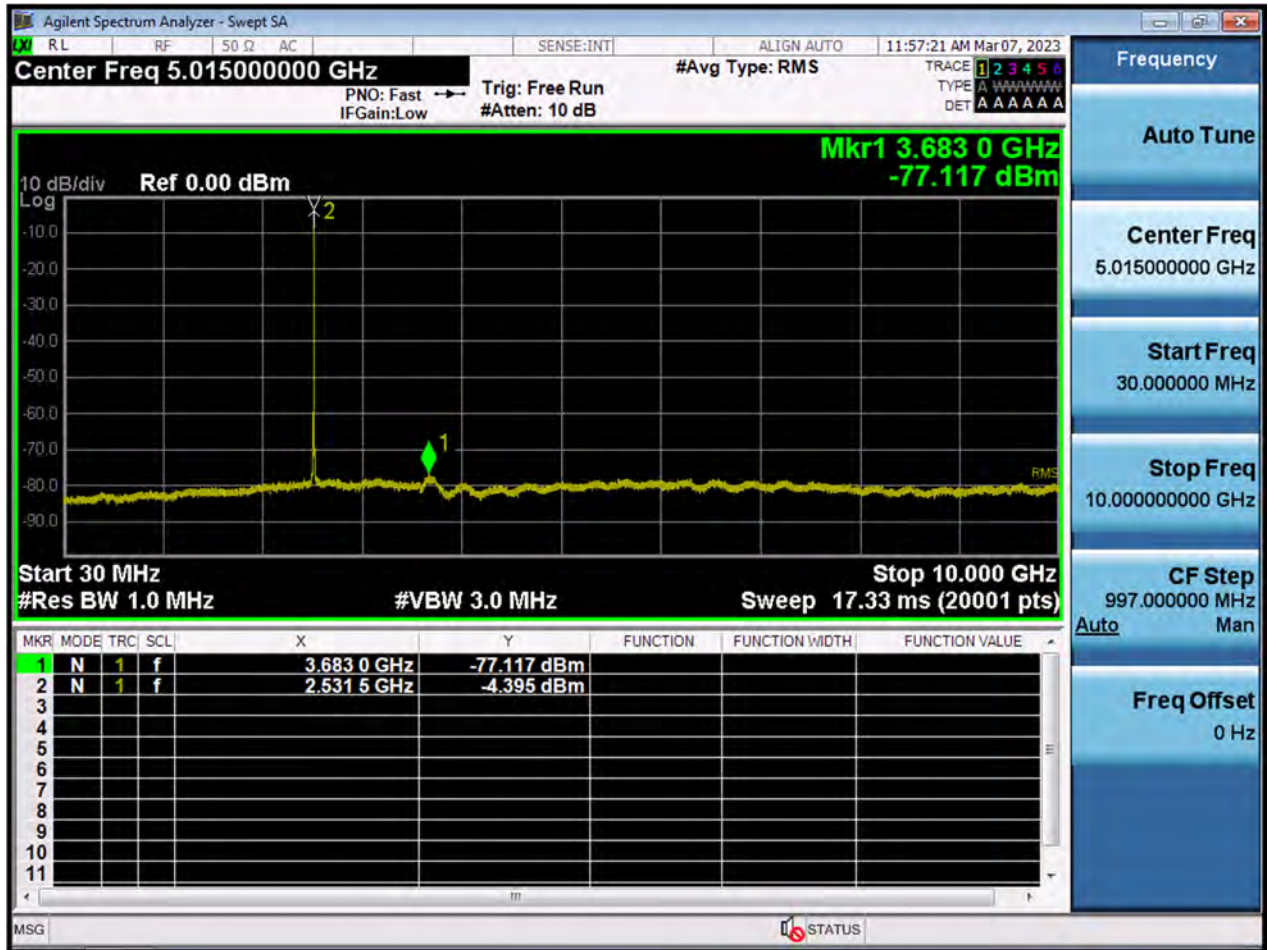




LTE7\_10 M\_CSE(30 M-10 G)\_Highest Channel

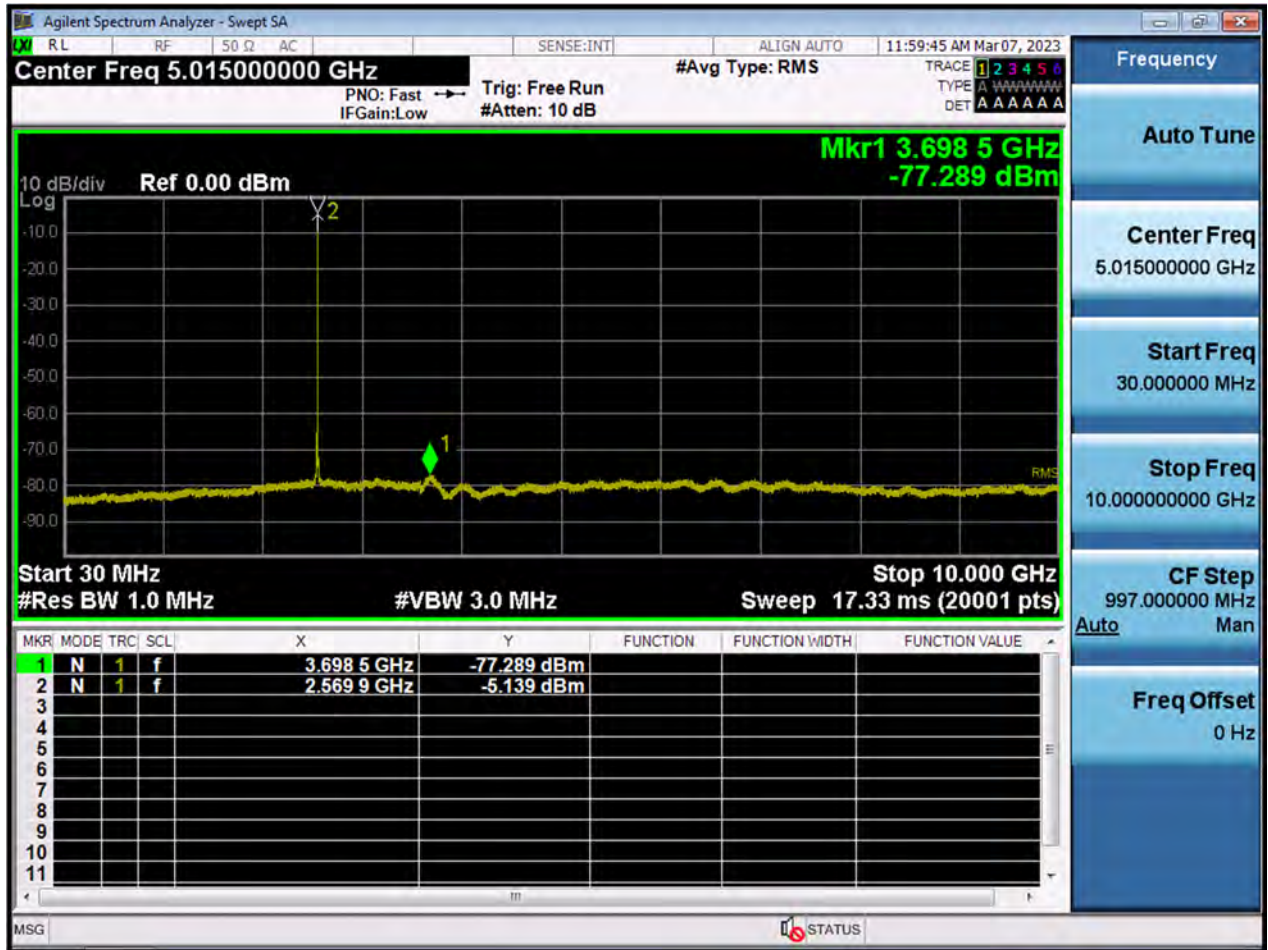


LTE7\_15 M\_CSE(30 M-10 G)\_Lowest Channel

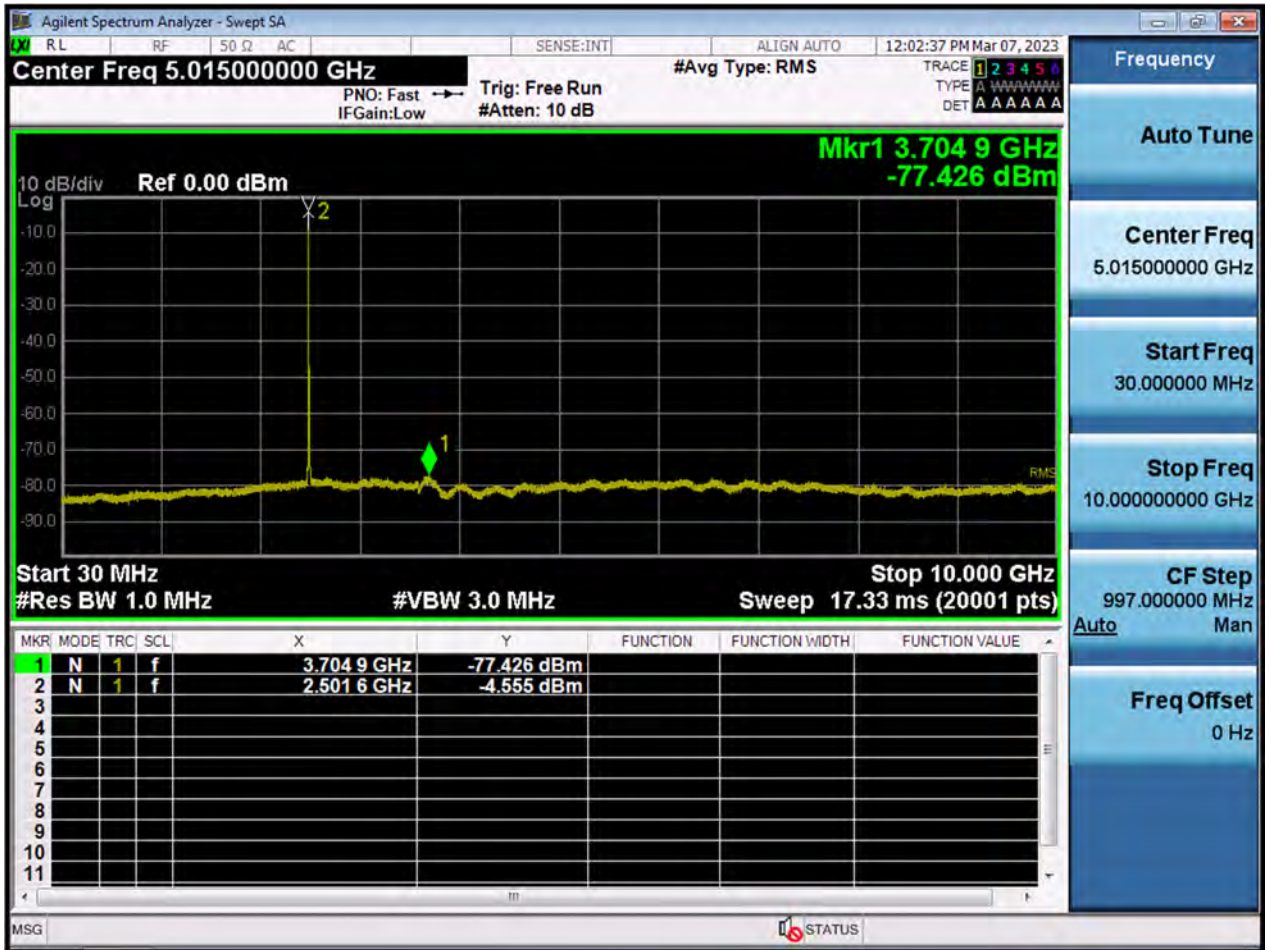






LTE7\_15 M\_CSE(30 M-10 G)\_Mid Channel

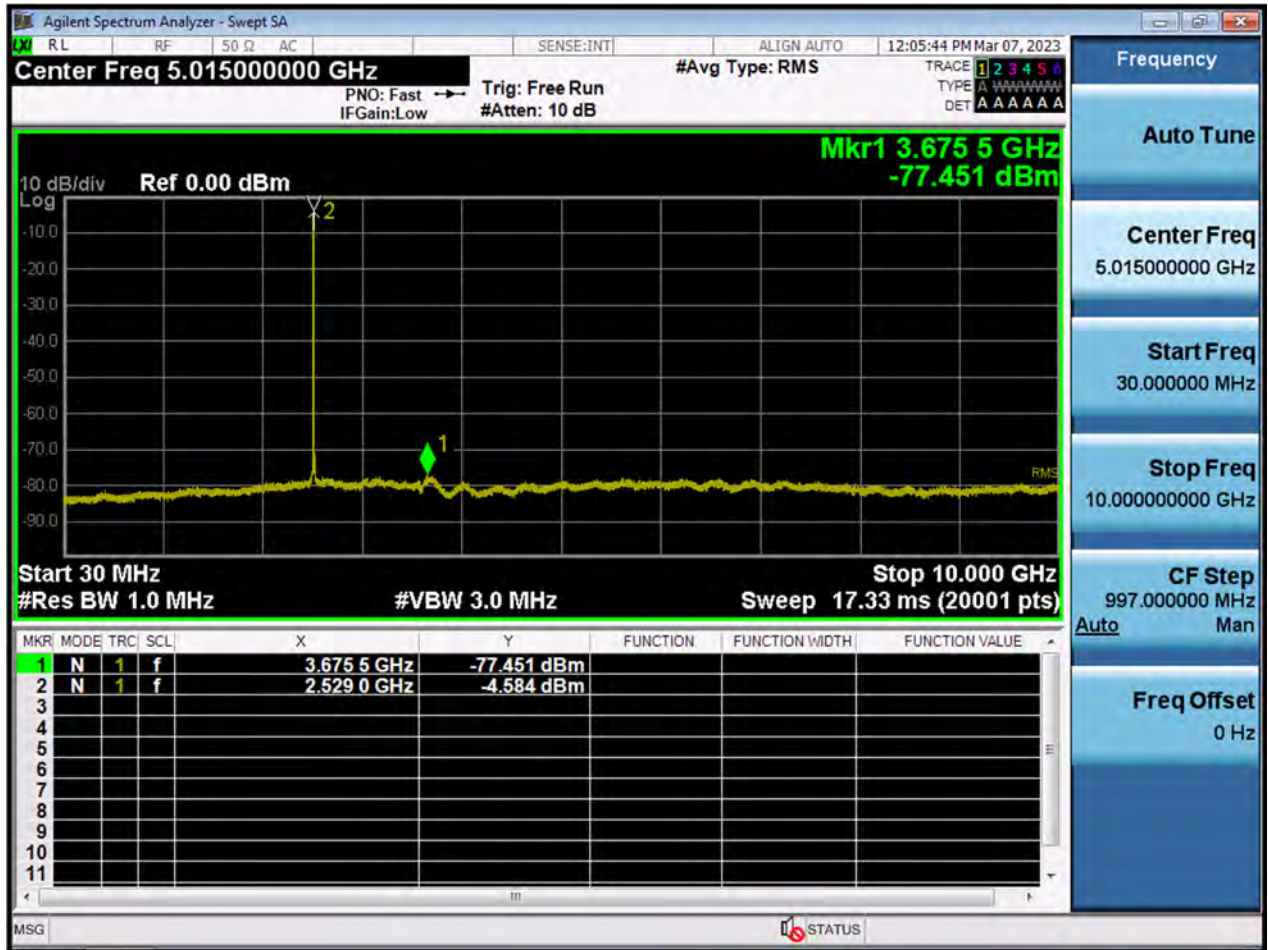




LTE7\_15 M\_CSE(30 M-10 G)\_Highest Channel

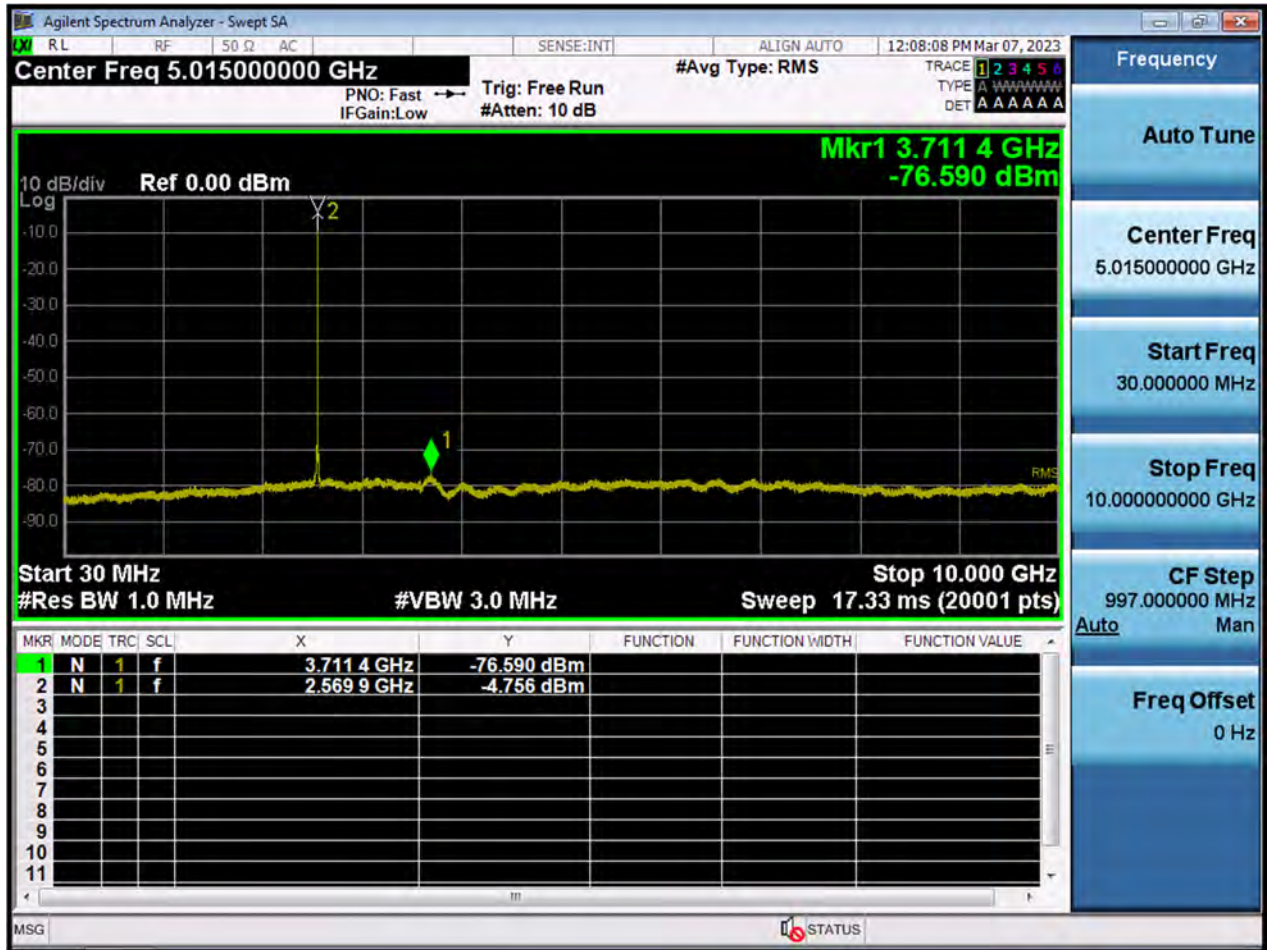




LTE7\_20 M\_CSE(30 M-10 G)\_Lowest Channel

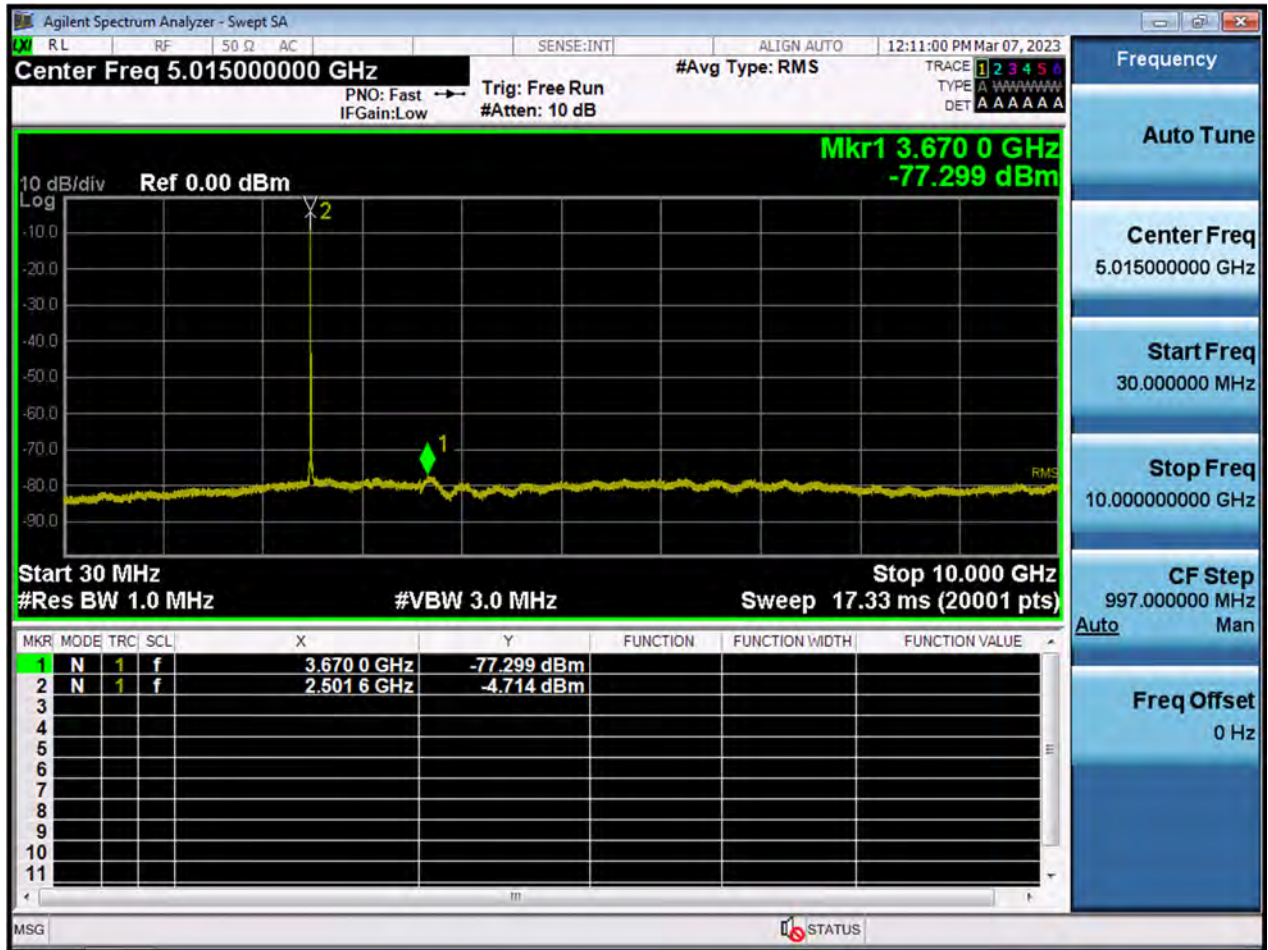




LTE7\_20 M\_CSE(30 M-10 G)\_Mid Channel

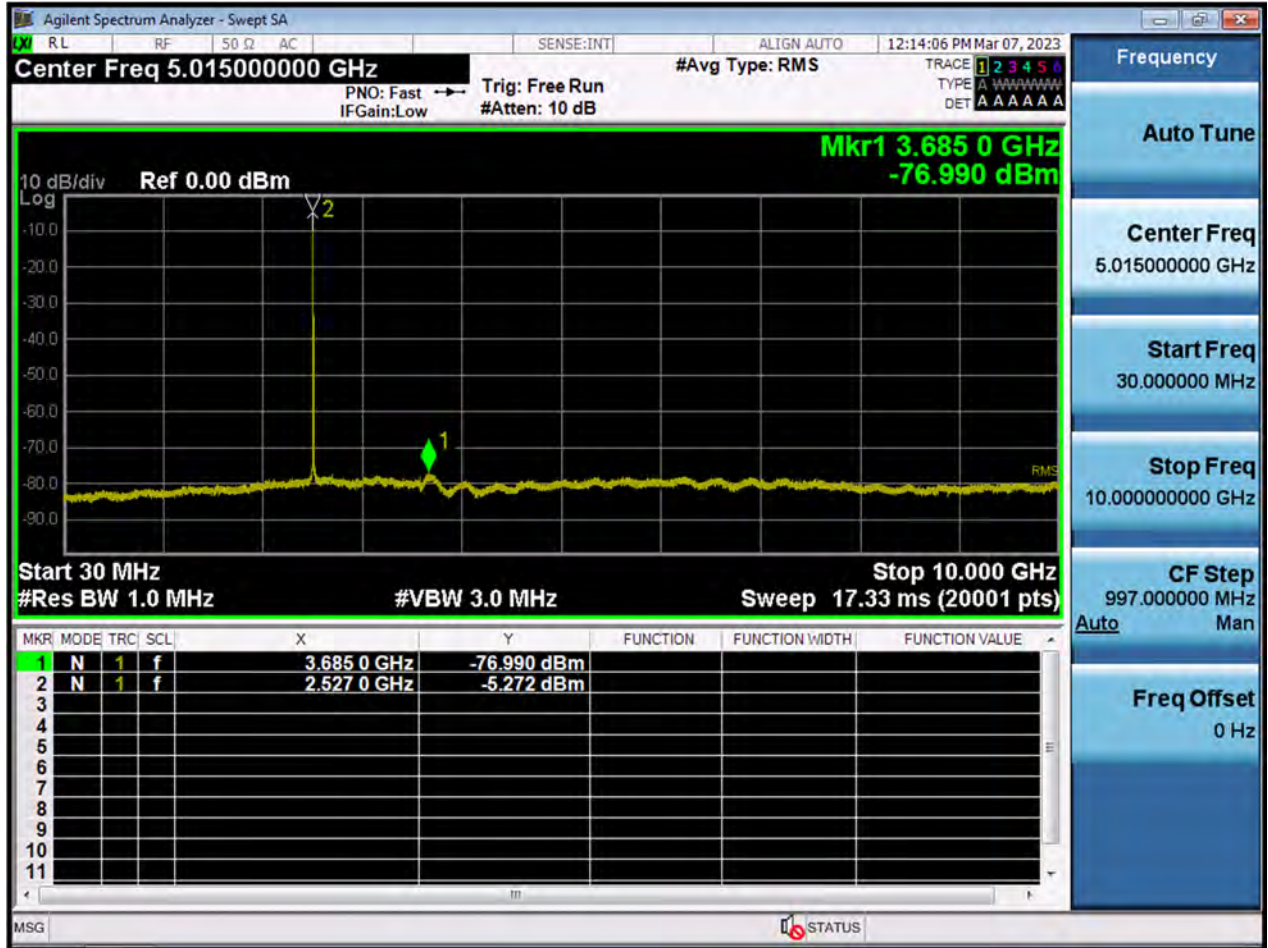





LTE7\_20 M\_CSE(30 M-10 G)\_Highest Channel

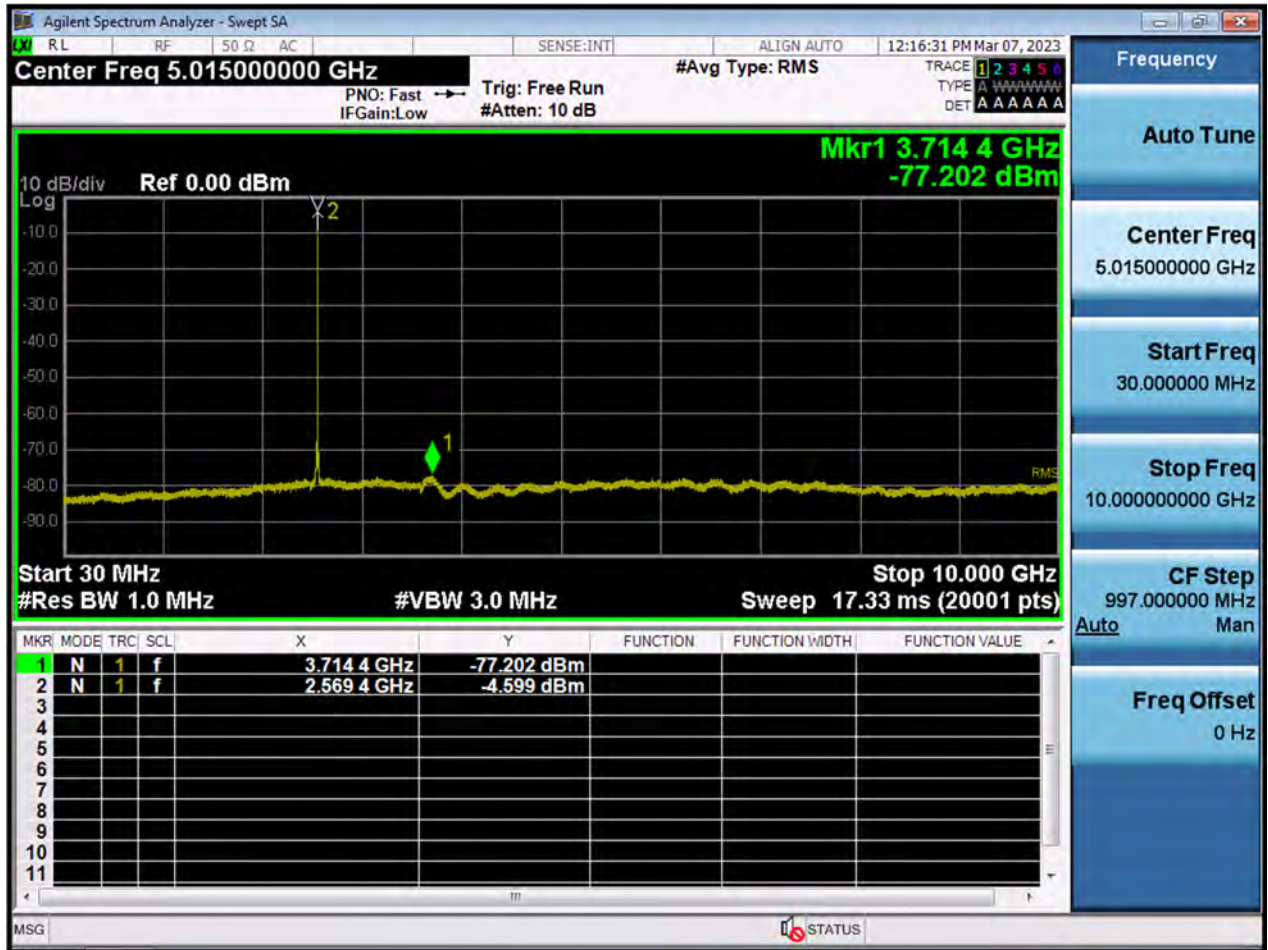



LTE7\_5 M\_CSE(10 G-26.5 G)\_Lowest Channel





LTE7\_5 M\_CSE(10 G-26.5 G)\_Mid Channel





LTE7\_5 M\_CSE(10 G-26.5 G)\_Highest Channel







LTE7\_10 M\_CSE(10 G-26.5 G)\_Lowest Channel





LTE7\_10 M\_CSE(10 G-26.5 G)\_Mid Channel








LTE7\_10 M\_CSE(10 G-26.5 G)\_Highest Channel





LTE7\_15 M\_CSE(10 G-26.5 G)\_Lowest Channel

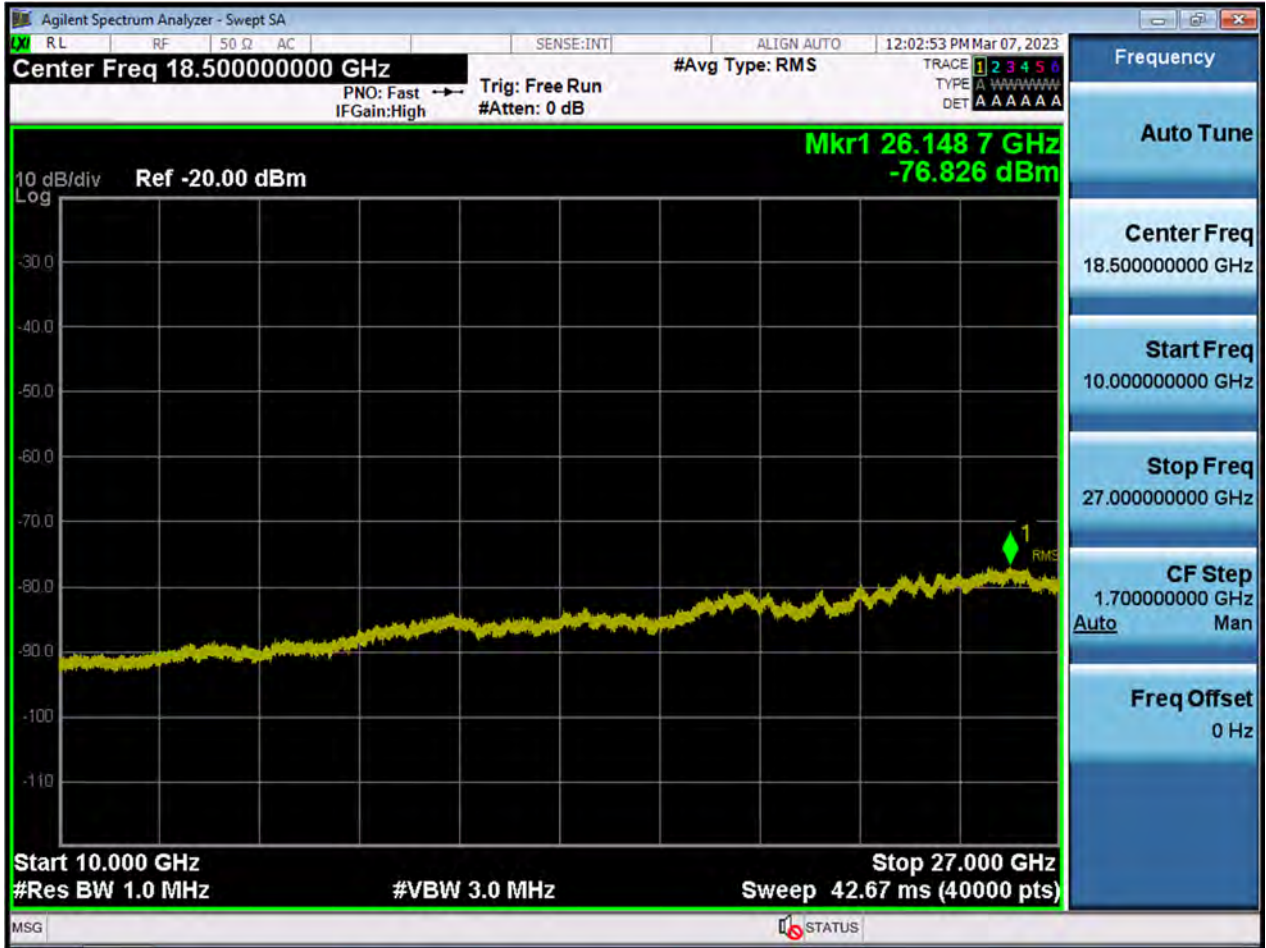



LTE7\_15 M\_CSE(10 G-26.5 G)\_Mid Channel





LTE7\_15 M\_CSE(10 G-26.5 G)\_Highest Channel





LTE7\_20 M\_CSE(10 G-26.5 G)\_Lowest Channel







LTE7\_20 M\_CSE(10 G-26.5 G)\_Mid Channel







LTE7\_20 M\_CSE(10 G-26.5 G)\_Highest Channel





## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2308-FC006-P |