




LTE band 12 (1.4 MHz)

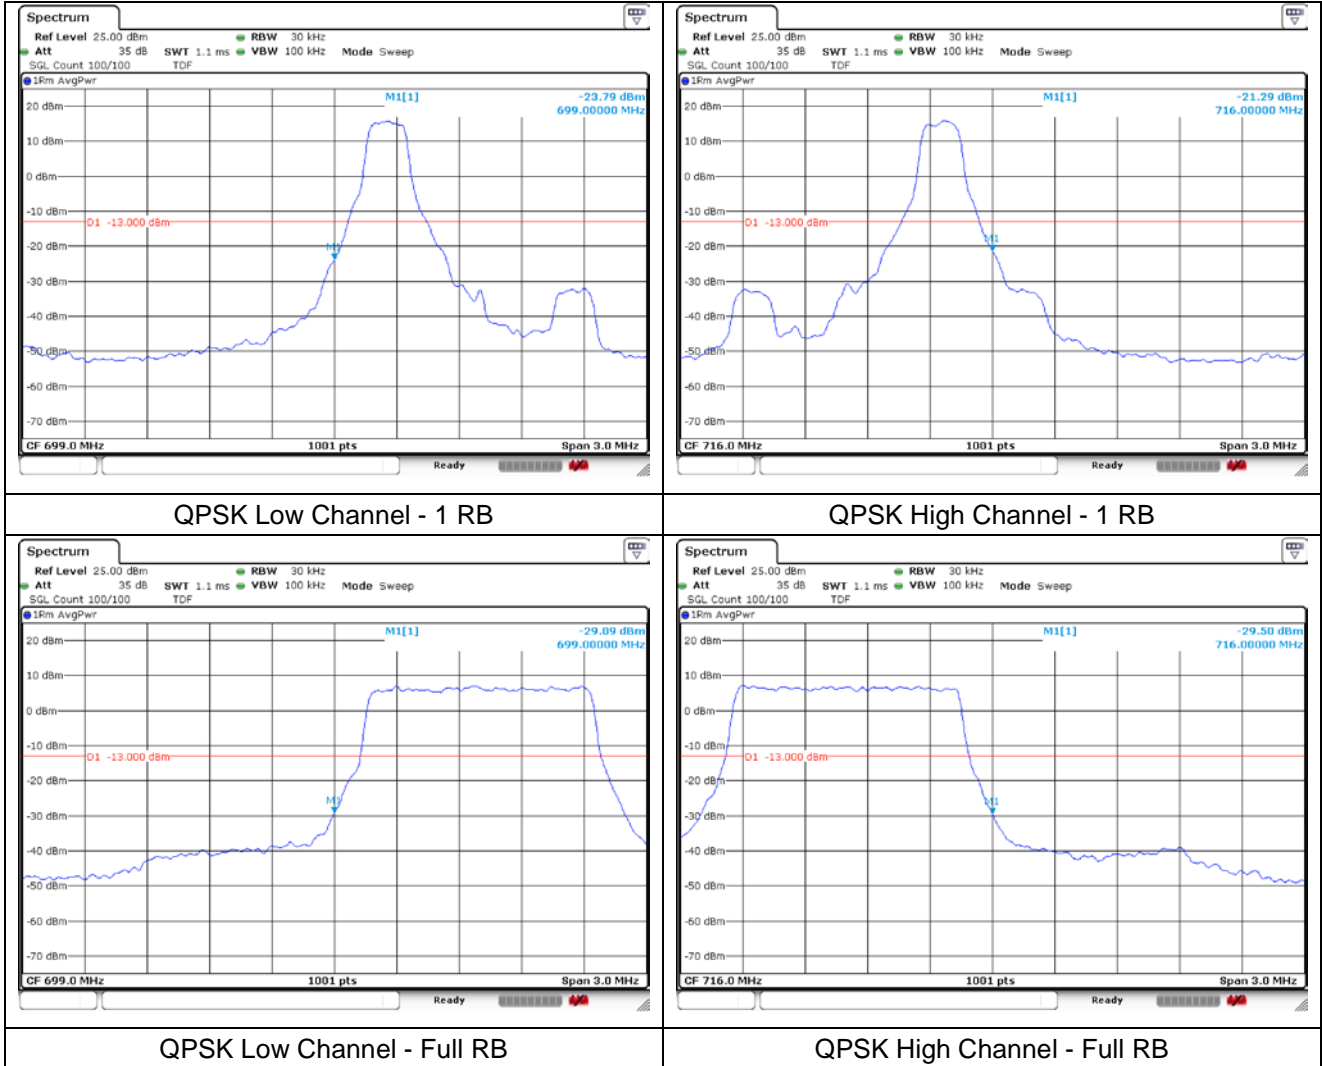


LTE band 12 (1.4 MHz)

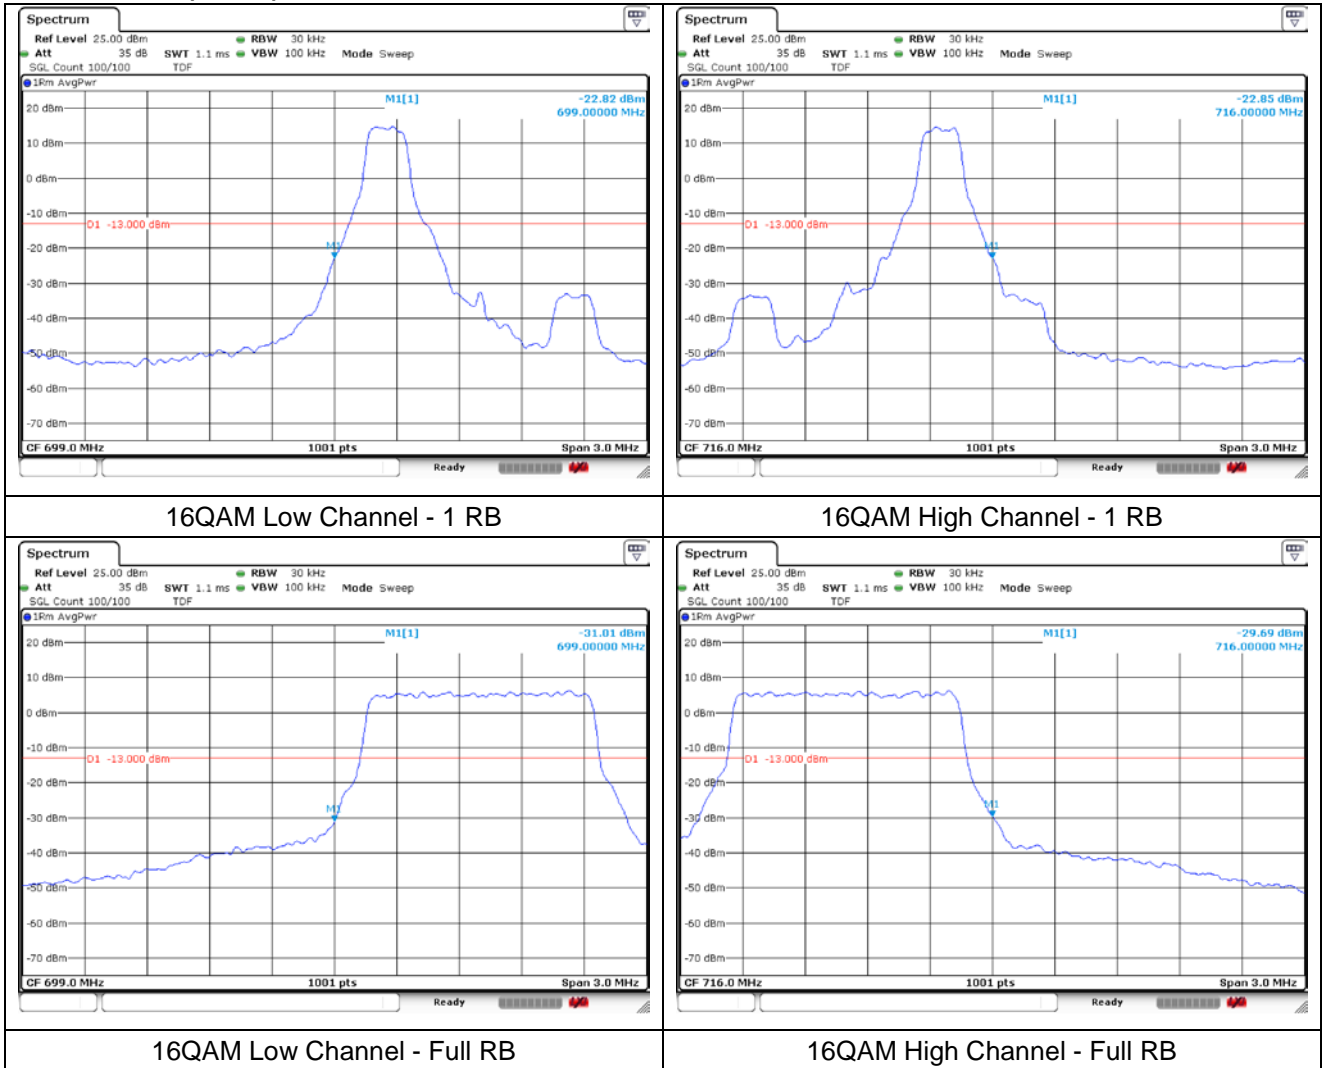


LTE band 12 (3 MHz)

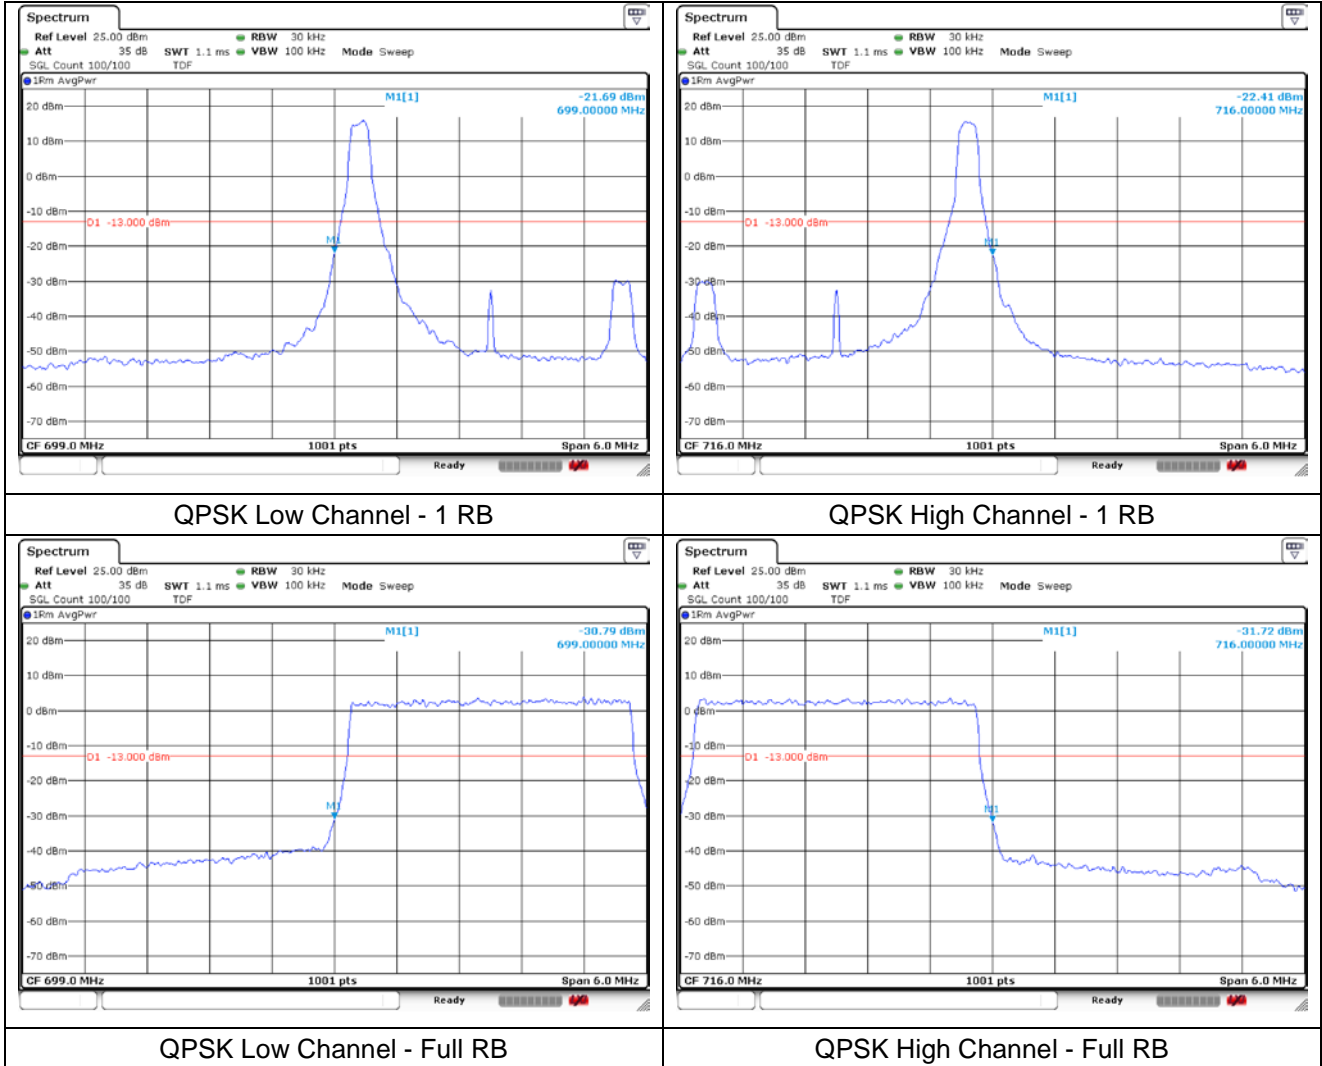


LTE band 12 (3 MHz)

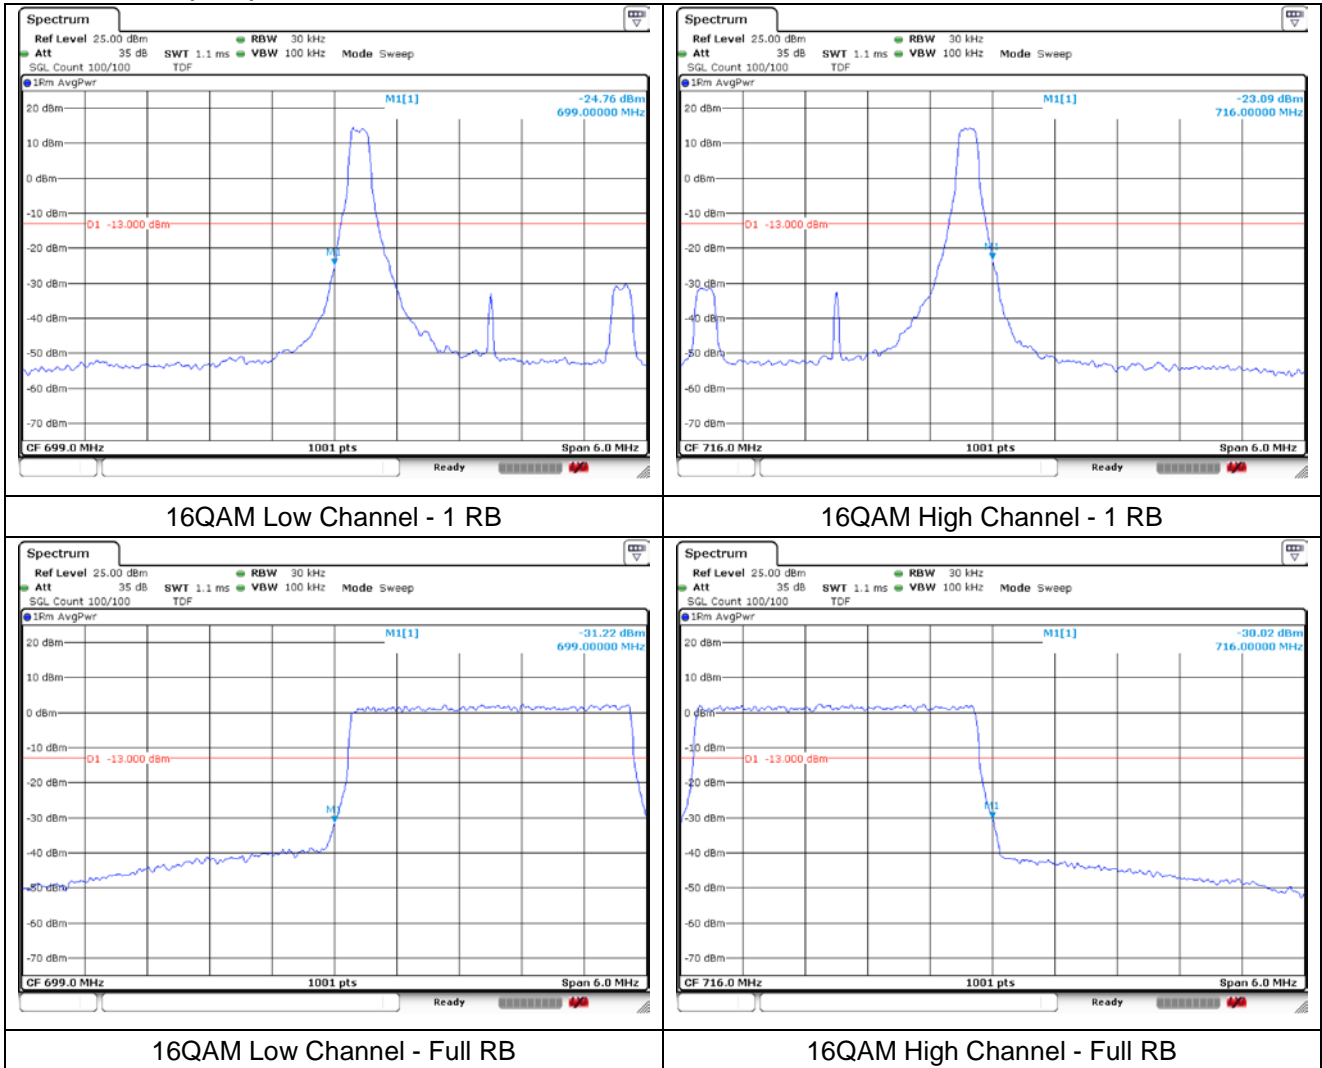


LTE band 12 (5 MHz)

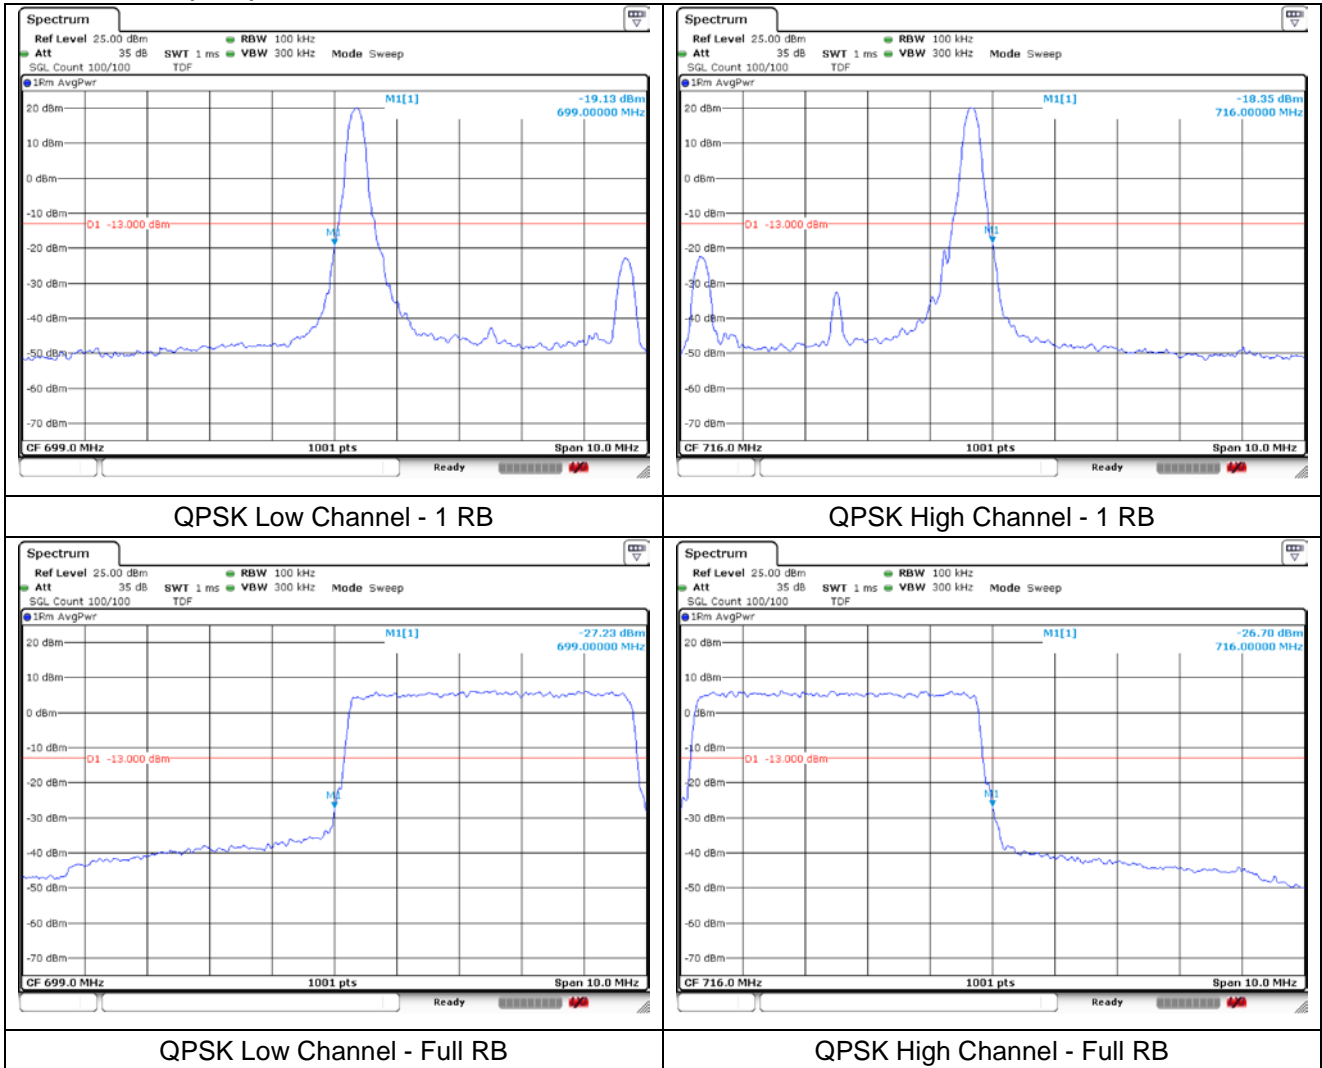


LTE band 12 (5 MHz)

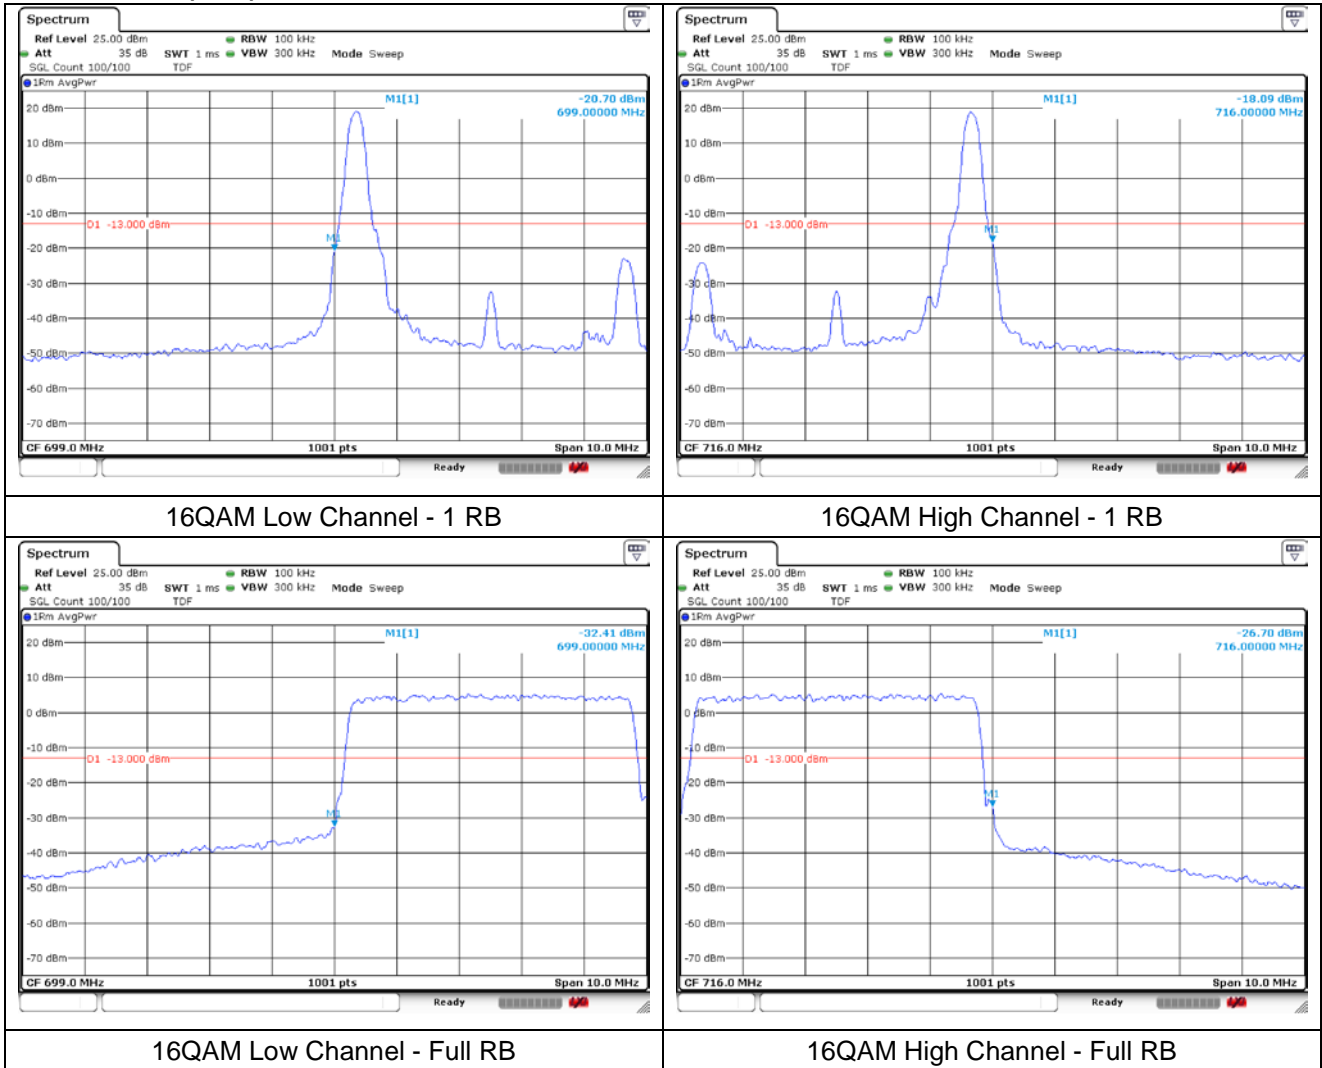

LTE band 12 (10 MHz)

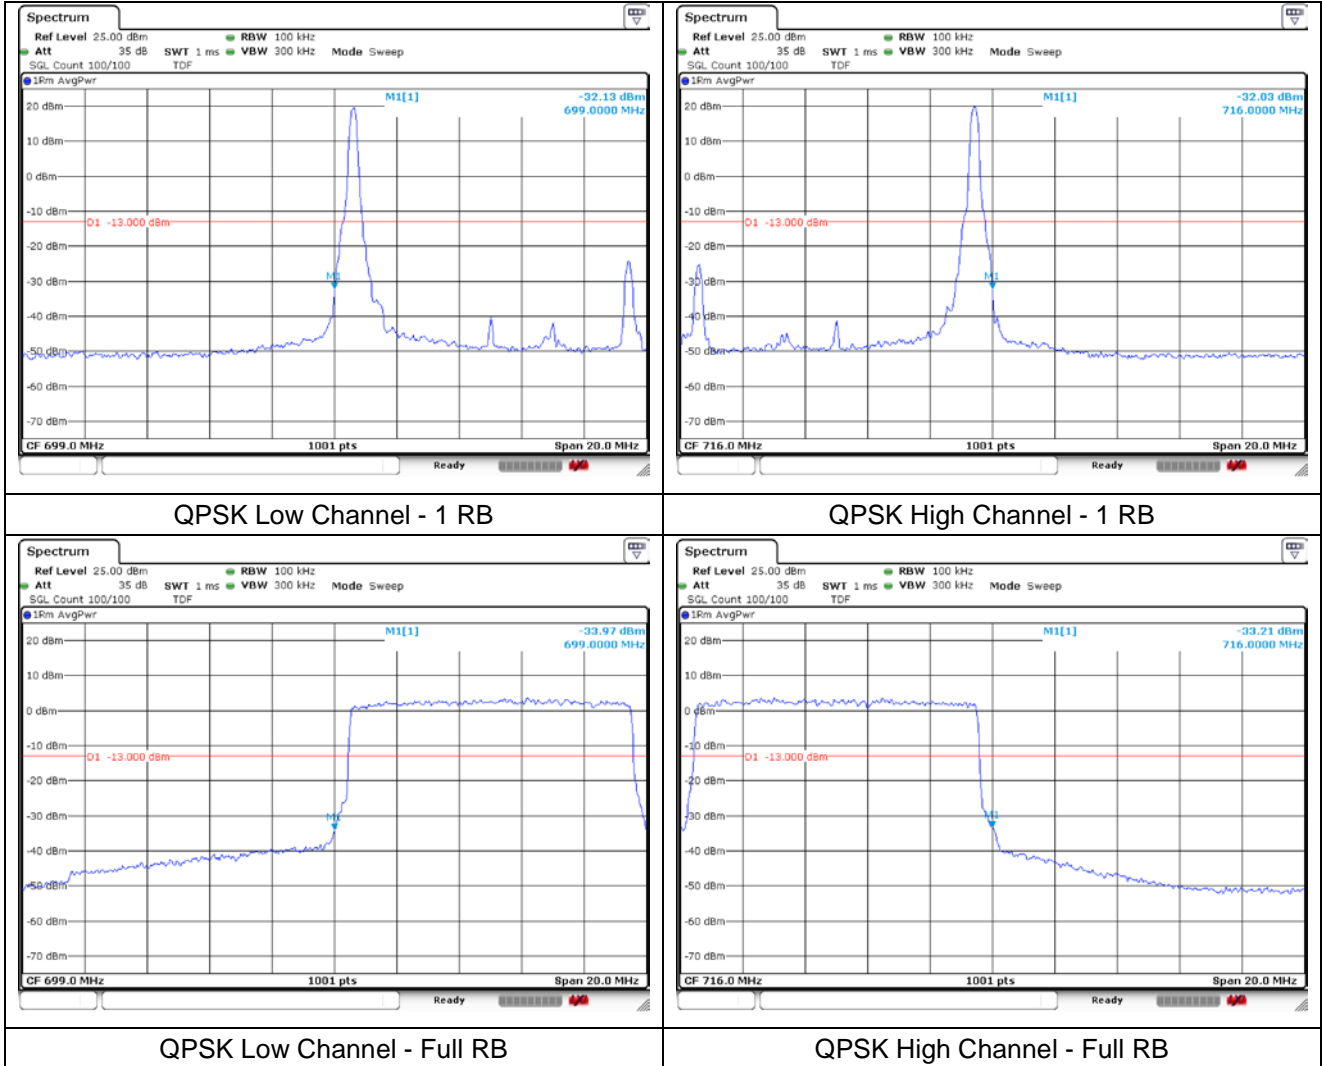

LTE band 12 (10 MHz)

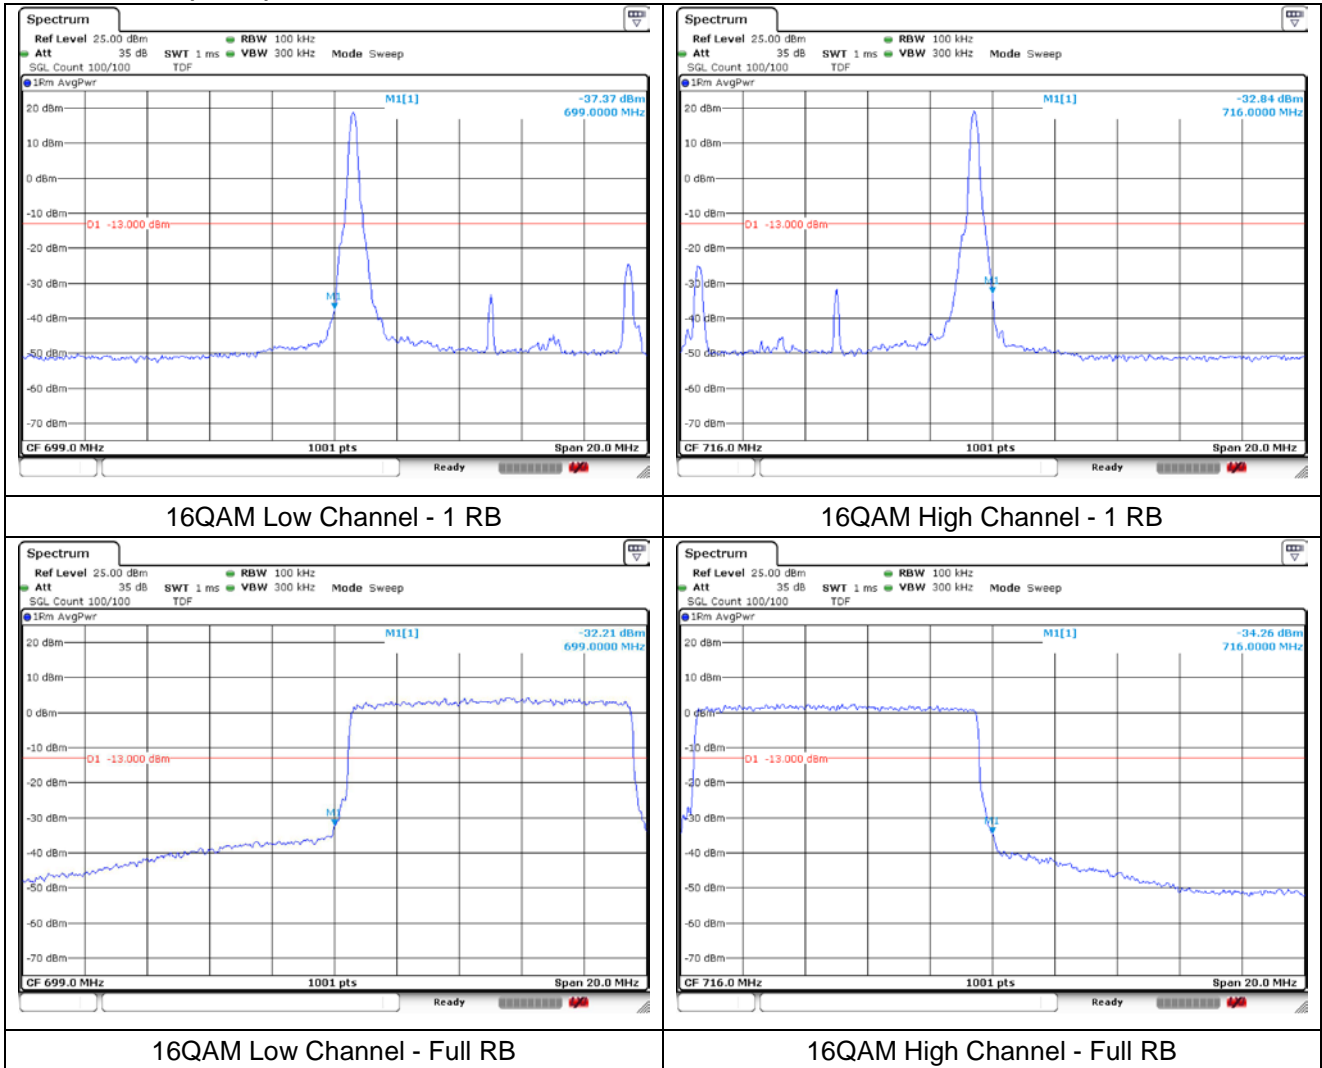

8. Frequency Stability

8.1. Limit

FCC

- § 2.1055 (a), § 2.1055 (d) & following:

- §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

- §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

- §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

IC

- RSS-Gen Issue 5

6.11, for licensed devices, the following measurement conditions apply:

a. at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage

- RSS-130 Issue 2

4.5, the transmitter frequency stability limit shall be determined as follows:

For equipment that is capable of transmitting numerous channels simultaneously for different applications (e.g. LTE and narrowband – internet of things (IoT)), the occupied bandwidth shall be the bandwidth representing the sum of the occupied bandwidths of these channels.

The frequency stability shall be sufficient to ensure that the occupied bandwidth remains within each frequency block range when tested at the temperature and supply voltage variations specified in RSS-Gen.

- RSS-132 Issue 3

5.3, the carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations and ±1.5 ppm for base stations.

- RSS-133 Issue 6


6.3, the carrier frequency shall not depart from the reference frequency, in excess of ±2.5 ppm for mobile stations and ±1.0 ppm for base stations.

- RSS-139 Issue 3

6.4, the frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

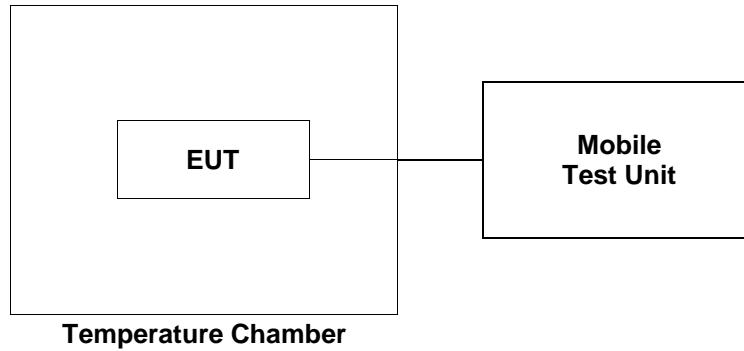

8.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

LTE band 2 at middle channel

Reference Frequency: 1 880.0 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.90	-3	-0.002 13
40		2	0.000 53
30		5	0.002 13
20(Ref.)		1	-
10		-2	-0.001 60
0		6	0.002 66
-10		3	0.001 06
-20		-4	-0.002 66
-30		2	0.000 53
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.49 (115 %)	2	0.000 53
	3.32 (85 %)	3	0.001 06

LTE band 4 at middle channel

Reference Frequency: 1 732.5 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.90	-4	-0.001 73
40		-2	-0.000 58
30		3	0.002 31
20(Ref.)		-1	-
10		1	0.001 15
0		-5	-0.002 31
-10		2	0.001 73
-20		7	0.004 62
-30		4	0.002 89
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.49 (115 %)	-4	-0.001 73
	3.32 (85 %)	-1	0.000 00

LTE band 5 at middle channel

Reference Frequency: 836.5 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.90	2	0.004 78
40		-3	-0.001 20
30		5	0.008 37
20(Ref.)		-2	-
10		6	0.009 56
0		4	0.007 17
-10		2	0.004 18
-20		-5	-0.003 59
-30		3	0.005 62
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.49 (115 %)	-2	0.000 00
	3.32 (85 %)	1	0.003 59

LTE band 12 at middle channel

Reference Frequency: 707.5 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.90	2	0.002 8
40		-3	-0.004 2
30		4	0.005 7
20(Ref.)		1	-
10		-2	-0.002 8
0		6	0.008 5
-10		-3	-0.004 2
-20		2	0.002 8
-30		7	0.009 9
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.49 (115 %)	-2	-0.002 8
	3.32 (85 %)	1	0.001 4

- End of the Test Report -