

TEST REPORT

of

FCC Part 2 Subpart J, Part 22 Subpart C/H,
Part 24 Subpart E and Part 27 Subpart C
IC RSS-130 Issue 2, RSS-132 Issue 3, RSS-133 Issue 6,
RSS-139 Issue 3 and RSS-Gen Issue 5

FCC ID: BEJTLHOBDDNN0B

IC Certification: 2703H-TLHOBDDNN0B


Equipment Under Test : Car Telematics Device
Model Name : TLHOBDDNN0B2
Variant Model Name(s) : Refer to the page 3
FCC Applicant : LG Electronics USA
IC Applicant : LG ELECTRONICS INC.
Manufacturer : LG Electronics Inc.
Date of Receipt : 2022.09.26
Date of Test(s) : 2022.10.10 ~ 2022.12.08
Date of Issue : 2022.12.14

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:

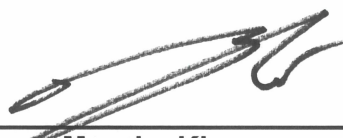
Murphy Kim

Technical
Manager:


Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory



INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. E.R.P. / E.I.R.P. & Spurious Radiated Emission -----	8

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

FCC Applicant : LG Electronics USA

FCC Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632

IC Applicant : LG ELECTRONICS INC.

IC Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyenggi-do, Korea (Republic of), 451-713

Contact Person : Kim, Sung-soo

Phone No. : +1 201 266 2215

1.3. Details of Manufacturer

Company : LG Electronics Inc.

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

Kind of Product	Car Telematics Device
Model Name	TLHOBDDNN0B2
Variant Model Names	TLHOBDDNN0B1, TLHOBENN0D1
Approved Module	FCC ID: BEJTM03LNNAHD0 IC Certification: 2703H-TM03LNNAHD0
Model Serial Number	353342703000020
Power Supply	DC 13.2 V
Rated Power	WCDMA II, V: 23 dBm LTE Band 2, 4, 5, 12: 23 dBm
Frequency Range	WCDMA II: 1 850 MHz ~ 1 910 MHz WCDMA V: 824 MHz ~ 849 MHz LTE Band 2: 1 850 MHz ~ 1 910 MHz LTE Band 4: 1 710 MHz ~ 1 755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz
Modulation Technique	QPSK, 16QAM
Antenna Type	External antenna
Antenna Gain**	699 MHz ~ 716 MHz: -2.20 dB i 824 MHz ~ 849 MHz: 0.40 dB i 1 710 MHz ~ 1 780 MHz: 0.40 dB i 1 850 MHz ~ 1 910 MHz: -0.10 dB i
H/W Version	Rev.C1
S/W Version	V3.6_20210526
FVIN	N/A

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMR40	100272	Jun. 16, 2022	Annual	Jun. 16, 2023
Signal Generator	R&S	SMBV100A	255834	May 25, 2022	Annual	May 25, 2023
Spectrum Analyzer	R&S	FSV30	103210	Dec. 08, 2021	Annual	Dec. 08, 2022
Mobile Test Unit	R&S	CMW500	144035	Feb. 10, 2022	Annual	Feb. 10, 2023
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40SS	7	Mar. 04, 2022	Annual	Mar. 04, 2023
High Pass Filter	Wainwright Instrument GmbH	WHKX2.2/12.75G-10SS	8	Mar. 04, 2022	Annual	Mar. 04, 2023
High Pass Filter	Wainwright Instrument GmbH	WHK3.0/18G-10SS	344	May 13, 2022	Annual	May 13, 2023
DC Power Supply	Agilent	U8002A	MY49030063	Jan. 25, 2022	Annual	Jan. 25, 2023
Preamplifier	H.P.	8447F	2944A03909	Aug. 04, 2022	Annual	Aug. 04, 2023
Preamplifier	R&S	SCU 18	10117	Jun. 13, 2022	Annual	Jun. 13, 2023
Preamplifier	TESTEK	TK-PA1840H	130016	Jan. 10, 2022	Annual	Jan. 10, 2023
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 23, 2021	Biennial	Aug. 23, 2023
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	01126	Feb. 07, 2022	Annual	Feb. 07, 2023
Horn Antenna	R&S	HF906	100326	Feb. 18, 2022	Annual	Feb. 18, 2023
Antenna Master	Innco systems GmbH	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/383 30516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	RFONE	MWX221-NMSNMS (4 m)	J1023142	Oct. 04, 2022	Semi-Annual	Apr. 04, 2023
Coaxial Cable	Qualwave Inc.	QA500-18-NN-10 (10 m)	22200114	Oct. 04, 2022	Semi-Annual	Apr. 04, 2023

► **Support Equipment**

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 2, 22, 24 and 27 / IC part RSS-130 Issue 2, RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 3 and RSS-Gen Issue 5			
Section in FCC	Section in IC	Test Item	Result
§22.913(a)(5) §24.232(c) §27.50(c)(10) §27.50(d)(4)	RSS-130 Issue 2 4.6 RSS-132 Issue 3 5.4 RSS-133 Issue 6 6.4 RSS-139 Issue 3 6.5	E.R.P. / E.I.R.P.	Complied ²⁾
§22.917(a) §24.238(a) §27.53(g) §27.53(h)(1)	RSS-130 Issue 2 4.7 RSS-132 Issue 3 5.5 RSS-133 Issue 6 6.5 RSS-139 Issue 3 6.6	Spurious Radiated Emission	Complied ²⁾
§2.1046	RSS-Gen Issue 5 6.12	Conducted Output Power	N/A ¹⁾
§2.1049	RSS-Gen Issue 5 6.7	Occupied Bandwidth	N/A ¹⁾
§22.913(d) §24.232(d) §27.50(d)(5)	RSS-130 Issue 2 4.6 RSS-132 Issue 3 5.4 RSS-133 Issue 6 6.4 RSS-139 Issue 3 6.5	Peak-Average Ratio	N/A ¹⁾
§22.917(a) §24.238(a) §27.53(g) §27.53(h)(1)	RSS-130 Issue 2 4.7 RSS-132 Issue 3 5.5 RSS-133 Issue 6 6.5 RSS-139 Issue 3 6.6	Spurious Emission at Antenna Terminal	N/A ¹⁾
§22.917(a) §24.238(a) §27.53(g) §27.53(h)(1)	RSS-130 Issue 2 4.7 RSS-132 Issue 3 5.5 RSS-133 Issue 6 6.5 RSS-139 Issue 3 6.6	Band Edge	N/A ¹⁾
§2.1055 §22.355 §24.235 §27.54	RSS-Gen Issue 5 6.11 RSS-130 Issue 2 4.5 RSS-132 Issue 3 5.3 RSS-133 Issue 6 6.3 RSS-139 Issue 3 6.4	Frequency Stability	N/A ¹⁾

Note;

- 1) The test items were used the results from the approved module.
- 2) This product is a C2PC case due to the addition of antennas.

1.7. Spurious Radiated Emission

The Radiated spurious emissions were tested in the band with the lowest margin of previously data and selected respectively 699 MHz to 716 MHz and 824 MHz to 849 MHz in the band where the antenna gain is increased.

Fundamental Frequency Range	Worst Case
699 MHz to 716 MHz	LTE Band 12 (1.4 MHz – QPSK)
824 MHz to 849 MHz	WCDMA V, LTE Band 5 (1.4 MHz – QPSK)

1.8. Sample Calculation for Offset

Where relevant, the following sample calculation is provided:

1.8.1. Radiation Test

- E.I.R.P. (dB m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) + 20 Log D - 104.8; where D is the measurement distance in meters.
- E.R.P (dB m) = E.I.R.P. (dB m) - 2.15 (dB)

1.9. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty	
Radiated Emission, 9 kHz to 30 MHz	H	3.30 dB
	V	3.30 dB
Radiated Emission, below 1 GHz	H	4.80 dB
	V	5.20 dB
Radiated Emission, above 1 GHz	H	3.90 dB
	V	4.00 dB

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

1.10. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL003632	2022.12.14	Initial

1.11. Information of Variant Model

Model Name		Description
Basic Model	TLHOBDDNN0B2	D-Class AMP condition
Variant Model	TLHOBDDNN0B1	Same RF module and circuit to basic model, Except below - Buffer AMP condition - De-populated to BUB (Backup battery) part
	TLHOBENN0D1	Same circuit to basic model, except below - Operating external ANT.


1.12. Test information of Cable Loss and Antenna Gain

Test Item	Frequency (MHz)	Cable Loss (dB)	Antenna Gain (dB i)	Final Antenna Gain (dB i)
WCDMA II	1 850 ~ 1 910	0.90	-0.10	-1
WCDMA V	824 ~ 849	0.50	0.40	-0.10
LTE - Band 2	1 850 ~ 1 910	0.90	-0.10	-1
LTE - Band 4	1 710 ~ 1 755	0.80	0.40	-0.40
LTE - Band 5	824 ~ 849	0.50	0.40	-0.10
LTE - Band 12	699 ~ 716	0.50	-2.20	-2.70


2. E.R.P. / E.I.R.P. & Spurious Radiated Emission

2.1. Test Setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz.

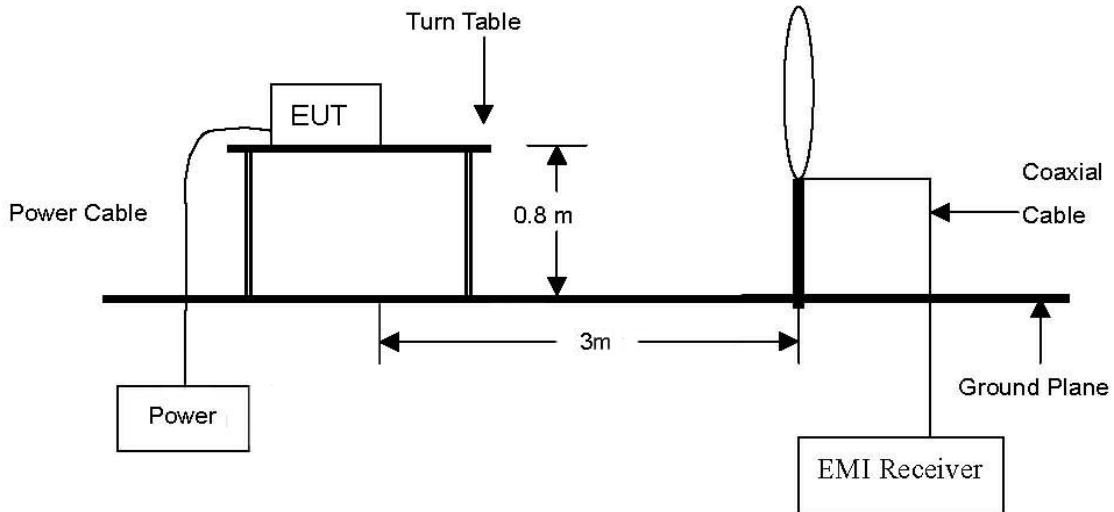

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

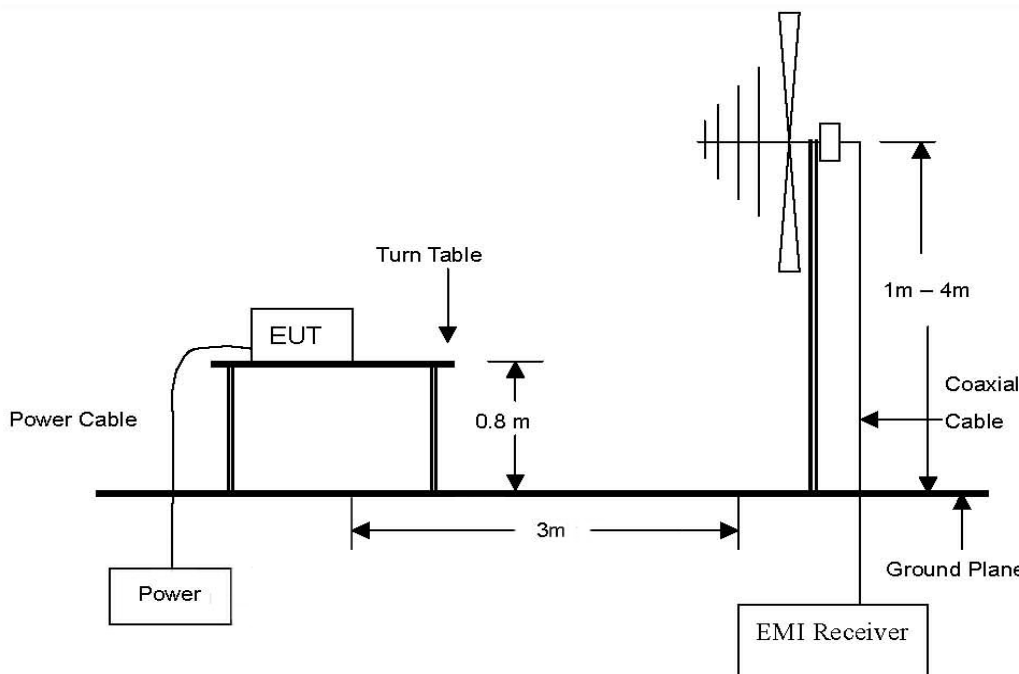

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 9 GHz.

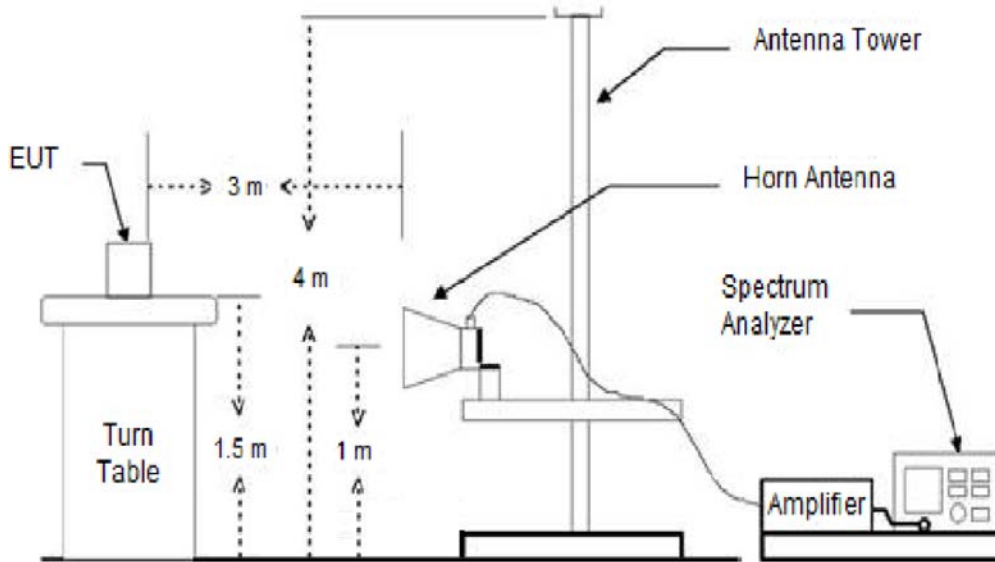

2.2. Limit

2.2.1. Limit of E.R.P. / E.I.R.P.

FCC

- §22.913(a)(5), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.
- §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.
- §27.50(c)(10), portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.
- §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1 710-1 755 MHz band and mobile and portable stations operating in the 1 695-1 710 MHz and 1 755-1 780 MHz bands are limited to 1 watt EIRP.

IC

- RSS-130 Issue 2
4.6.3, the e.r.p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

For base and fixed equipment other than fixed subscriber equipment, refer to SRSP-518 for the e.i.r.p. limits.

- RSS-132 Issue 3
5.4, the transmitter output power shall be measured in terms of average power.
The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.
Refer to SRSP-503 for base station e.i.r.p. limits.

- RSS-133 Issue 6
6.4, the equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510. Moreover, base station transmitters operating in the band 1 930-1 995 MHz shall not have output power exceeding 100 watts.

- RSS-139 Issue 3
6.5, the equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed one watt. The e.i.r.p. for fixed and base stations in the band 1 710-1 780 MHz shall not exceed one watt.

2.2.2. Limit of Spurious Radiated Emission

FCC

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

- §27.53(g), the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

- §27.53(h)(1), for operations in the 1 695-1 710 MHz, 1 710-1 755 MHz, 1 755-1 780 MHz, 1 915-1 920 MHz, 1 995-2 000 MHz, 2 000-2 020 MHz, 2 110-2 155 MHz, 2 155-2 180 MHz, and 2 180-2 200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{Log}_{10} (f / 6.1)$ decibels or $50 + 10 \text{Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

IC

- RSS-130 Issue 2

4.7.1, the unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dB W), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

- RSS-132 Issue 3

5.5, Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1 % of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the occupied bandwidth, power integration over 100 kHz is required.

- RSS-133 Issue 6

6.5, Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1 % of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the emission bandwidth, power integration over 1.0 MHz is required.

- RSS-139 Issue 3

6.6, (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1 % of the emission bandwidth shall be attenuated below the transmitter output power P (in dB W) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dB W) by at least $43 + 10 \log_{10} p$ (watts) dB.

2.3. Test Procedure: Based on ANSI/TIA 603E: 2016 and ANSI C63.26-2015, KDB 971168 D01 Power Meas License Digital Systems v03r01.

1. On a test site, the EUT shall be placed at 0.8 m or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. Radiated spurious emissions measurement method was set as follows:
RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz, VBW $\geq 3 \times$ RBW,
Detector = RMS, trace mode = max hold, per the guidelines of ANSI C63.26-2015 and KDB 971168 D01 Power Meas License Digital Systems v03r01.
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
11. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
12. The measurement shall be repeated with the test antenna orientated for horizontal polarization.

2.4. E.R.P. / E.I.R.P.

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

WCDMA

Band	Frequency (MHz)	Maximum Conducted Power (dB m)	Maximum Conducted Power (W)	Final Antenna Gain (dB i)	Maximum E.I.R.P. (dB m)	Maximum E.I.R.P. (W)	Maximum E.R.P. (dB m)	Maximum E.R.P. (W)	Limit
II	1 850 ~ 1 910	24	0.251	-1	23	0.200			2 W E.I.R.P.
V	824 ~ 849	24	0.251	-0.10	23.90	0.245	21.75	0.150	7 W E.R.P.

LTE

Band	Frequency (MHz)	Maximum Conducted Power (dB m)	Maximum Conducted Power (W)	Final Antenna Gain (dB i)	Maximum E.I.R.P. (dB m)	Maximum E.I.R.P. (W)	Maximum E.R.P. (dB m)	Maximum E.R.P. (W)	Limit
2	1 850 ~ 1 910	24	0.251	-1	23	0.200			2 W E.I.R.P.
4	1 710 ~ 1 780	24	0.251	-0.40	23.60	0.229			1 W E.I.R.P.
5	824 ~ 849	24	0.251	-0.10	23.90	0.245	21.75	0.150	7 W E.R.P.
12	699 ~ 716	24	0.251	-2.70	21.30	0.135	19.15	0.082	3 W E.R.P.

Remark;

1. E.I.R.P. (dB m) = Maximum Conducted Power (dB m) + Antenna Gain (dB i)
2. E.R.P. (dB m) = E.I.R.P. (dB m) - 2.15 (dB); where E.R.P. and E.I.R.P. are expressed in consistent units.

2.5. Spurious Radiated Emission

WCDMA V

Frequency (MHz)	Measured Level (dB μ V)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dB μ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (826.40 MHz)									
1 654.30	54.22	V	25.65	-38.67	41.20	-97.41	-56.21	-13	43.21
1 654.75	54.81	H	25.66	-38.67	41.80	-97.41	-55.61	-13	42.61
2 475.55	52.78	V	28.15	-36.86	44.07	-97.41	-53.34	-13	40.34
2 476.00	54.67	H	28.15	-36.86	45.96	-97.41	-51.45	-13	38.45
Middle Channel (836.60 MHz)									
1 674.10	56.00	H	25.89	-38.66	43.23	-97.41	-54.18	-13	41.18
1 675.90	53.42	V	25.91	-38.66	40.67	-97.41	-56.74	-13	43.74
2 506.60	53.26	H	28.14	-37.11	44.29	-97.41	-53.12	-13	40.12
2 507.05	49.81	V	28.14	-37.11	40.84	-97.41	-56.57	-13	43.57
High Channel (846.60 MHz)									
1 691.65	53.27	H	26.10	-38.74	40.63	-97.41	-56.78	-13	43.78
1 694.80	52.98	V	26.14	-38.75	40.37	-97.41	-57.04	-13	44.04

LTE band 5 (1.4 MHz – QPSK)

Frequency (MHz)	Measured Level (dB μ V)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dB μ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (824.7 MHz)									
1 648.00	72.92	H	25.60	-38.67	59.85	-97.41	-37.56	-13	24.56
1 648.45	55.92	V	25.60	-38.68	42.84	-97.41	-54.57	-13	41.57
2 472.85	63.09	H	28.15	-36.80	54.44	-97.41	-42.97	-13	29.97
2 472.85	62.40	V	28.15	-36.80	53.75	-97.41	-43.66	-13	30.66
Middle Channel (836.5 MHz)									
1 671.85	53.91	H	25.86	-38.66	41.11	-97.41	-56.30	-13	43.30
1 671.85	58.54	V	25.86	-38.66	45.74	-97.41	-51.67	-13	38.67
2 507.95	51.50	H	28.15	-37.10	42.55	-97.41	-54.86	-13	41.86
2 507.95	55.71	V	28.15	-37.10	46.76	-97.41	-50.65	-13	37.65
High Channel (848.3 MHz)									
1 695.25	54.63	H	26.14	-38.76	42.01	-97.41	-55.40	-13	42.40
1 695.70	57.09	V	26.15	-38.76	44.48	-97.41	-52.93	-13	39.93
2 543.50	54.30	H	28.36	-36.61	46.05	-97.41	-51.36	-13	38.36
2 543.50	58.32	V	28.36	-36.61	50.07	-97.41	-47.34	-13	34.34

LTE band 12 (1.4 MHz – QPSK)

Frequency (MHz)	Measured Level (dB μ V)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dB μ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (699.7 MHz)									
1 398.25	68.50	H	25.10	-39.15	54.45	-97.41	-42.96	-13	29.96
1 398.25	72.47	V	25.10	-39.15	58.42	-97.41	-38.99	-13	25.99
2 097.55	54.67	V	27.50	-37.36	44.81	-97.41	-52.60	-13	39.60
Middle Channel (707.5 MHz)									
1 413.55	65.89	H	25.07	-39.14	51.82	-97.41	-45.59	-13	32.59
1 414.00	69.77	V	25.07	-39.14	55.70	-97.41	-41.71	-13	28.71
2 120.95	52.94	H	27.54	-37.08	43.40	-97.41	-54.01	-13	41.01
2 120.95	52.34	V	27.54	-37.08	42.80	-97.41	-54.61	-13	41.61
High Channel (715.3 MHz)									
1 429.30	66.74	H	25.04	-39.13	52.65	-97.41	-44.76	-13	31.76
1 429.30	73.88	V	25.04	-39.13	59.79	-97.41	<u>-37.62</u>	-13	24.62
2 144.35	51.77	V	27.59	-36.81	42.55	-97.41	-54.86	-13	41.86
2 144.80	51.70	H	27.59	-36.81	42.48	-97.41	-54.93	-13	41.93

Remark;

1. E (dB μ V/m) = Measured Level (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) + AMP (dB).
2. E.I.R.P. (dB m) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters.
3. E.R.P. (dB m) = E.I.R.P. (dB m) - 2.15 (dB); where E.R.P. and E.I.R.P. are expressed in consistent units.
4. CF (dB) (E.I.R.P.) = 20 log D - 104.8.
5. CF (dB) (E.R.P.) = 20 log D - 104.8 - 2.15.
6. AF = Antenna Factor, CL = Cable Loss, CF = Conversion Factor.

- End of the Test Report -