

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2305-0067

2. Customer

- Name (FCC) : LG Electronics USA, Inc. / Name (IC) : LG ELECTRONICS INC.
- Address (FCC) : 111 Sylvan Avenue North Building Englewood Cliffs New Jersey United States 07632  
Address (IC) : 222, LG-ro, Jinwi-myeon Pyeongtaek-si, Gyeonggi-do 451-713 Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Telematics / TLVUM3IU-N  
FCC ID : BEJTLVUM3IU-N  
IC : 2703H-TLVUM3IUN

5. FCC Regulation(s): Part 2, 22, 24, 27  
IC Standard(s): RSS-Gen Issue 5, 132 Issue 4, 133 Issue 6, 139 Issue 4  
Test Method Used : KDB971168 D01v03, ANSI/TIA-603-E-2016, ANSI C63.26-2015

6. Date of Test : 2023.05.08 ~ 2023.05.11



7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : SeungMin Gil  (Signature)	Name : JaeJin Lee  (Signature)

2023 . 05 . 18 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2305-0067	May. 18, 2023	Initial issue	SeungMin Gil	JaeJin Lee

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. INTRODUCTION .....</b>	<b>5</b>
2.1. EUT DESCRIPTION .....	5
2.2. TESTING ENVIRONMENT .....	5
2.3. MEASURING INSTRUMENT CALIBRATION .....	5
2.4. MEASUREMENT UNCERTAINTY .....	5
2.5. TEST FACILITY .....	5
<b>3. DESCRIPTION OF TESTS .....</b>	<b>6</b>
3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power) ....	6
3.2. PEAK TO AVERAGE RATIO .....	8
3.3. OCCUPIED BANDWIDTH (99 % Bandwidth) .....	10
3.4. SPURIOUS EMISSIONS AT ANTENNA TERMINAL .....	11
3.5. BAND EDGE EMISSIONS AT ANTENNA TERMINAL .....	12
3.6. RADIATED SPURIOUS EMISSIONS .....	13
3.7. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	14
<b>4. LIST OF TEST EQUIPMENT .....</b>	<b>15</b>
<b>5. SUMMARY OF TEST RESULTS.....</b>	<b>16</b>
<b>6. EMISSION DESIGNATOR AND SAMPLE CALCULATION....</b>	<b>17</b>
<b>7. TEST DATA .....</b>	<b>18</b>
7.1. CONDUCTED OUTPUT POWER .....	18
7.2. PEAK TO AVERAGE RATIO .....	21
7.3. OCCUPIED BANDWIDTH (99 % Bandwidth) .....	21
7.4. SPURIOUS MISSIONS AT ANTENNA TERMINAL.....	22
7.5. BAND EDGE EMISSIONS AT ANTENNA TERMINAL .....	22
7.6. EFFECTIVE RADIATED POWER.....	23
7.7. EQUIVALENT ISOTROPIC RADIATED POWER.....	24
7.8. RADIATED SPURIOUS EMISSIONS .....	25
7.9. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	27
7.9.1. FREQUENCY STABILITY (GSM850) .....	27
7.9.2. FREQUENCY STABILITY (WCDMA850) .....	28
7.9.3. FREQUENCY STABILITY (WCDMA1700) .....	29
7.9.4. FREQUENCY STABILITY (GSM1900) .....	30
7.9.5. FREQUENCY STABILITY (WCDMA1900) .....	31
<b>8. TEST PLOTS .....</b>	<b>32</b>
8.1. PEAK TO AVERAGE RATIO .....	32
8.2. OCCUPIED BANDWIDTH (99 % Bandwidth) .....	38
8.3. SPURIOUS EMISSIONS AT ANTENNA TERMINAL .....	45
8.4. BAND EDGE EMISSIONS AT ANTENNA TERMINAL.....	58

## 1. GENERAL INFORMATION

<b>Equipment Class</b>	PCS Licensed Transmitter(PCB)
<b>Product Name</b>	Telematics
<b>Model Name</b>	TLVUM3IU-N
<b>Add Model Name</b>	-
<b>FVIN(Firmware Version Identification Number)</b>	X507
<b>EUT Serial Number</b>	303VIBBE98397
<b>Power Supply</b>	DC 12 V
<b>Antenna Information</b>	Antenna Type: Shark Fin antenna (Model : 5Q0.035.507.AK)

	Antenna gain (dBi)	Cable loss(dB)	Antenna gain including connected cable loss between transmitter and antenna (dBi)
Band 850	3.58	1.78	1.80
Band 1700	5.21	2.66	2.55
Band 1900	5.21	2.82	2.39

Mode	Tx Frequency (MHz)	Emission Designator	Conducted output power		ERP		EIRP	
			dBm	W	dBm	W	dBm	W
GSM850	824.2 ~ 848.8	247KGXW	31.41	1.384	28.54	0.714	-	-
EDGE850	824.2 ~ 848.8	249KG7W	25.28	0.337	22.52	0.179	-	-
WCDMA850	826.4 ~ 846.6	4M15F9W	21.86	0.153	18.43	0.070	-	-
WCDMA1700	1 712.4 ~ 1 752.6	4M15F9W	22.27	0.169	-	-	20.80	0.120
GSM1900	1 850.2 ~ 1 909.8	250KGXW	28.17	0.656	-	-	27.68	0.586
EDGE1900	1 850.2 ~ 1 909.8	246KG7W	24.12	0.258	-	-	23.80	0.240
WCDMA1900	1 852.4 ~ 1 907.6	4M16F9W	21.92	0.156	-	-	21.21	0.132

## 2. INTRODUCTION

### 2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports 850/1900 GSM, 850/1700/1900 WCDMA, Multi-band LTE.

### 2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +23 °C
▪ Relative Humidity	41 % ~ 44 %

### 2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$ )
Radiated Disturbance (Above 18 GHz)	5.2 dB (The confidence level is about 95 %, $k = 2$ )


### 2.5. TEST FACILITY

<b>Dt&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.		
- FCC & IC MRA Designation No. : KR0034		
- ISED#: 5740A		
<a href="http://www.dtnc.net">www.dtnc.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 3. DESCRIPTION OF TESTS

#### 3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

##### Test Set-up

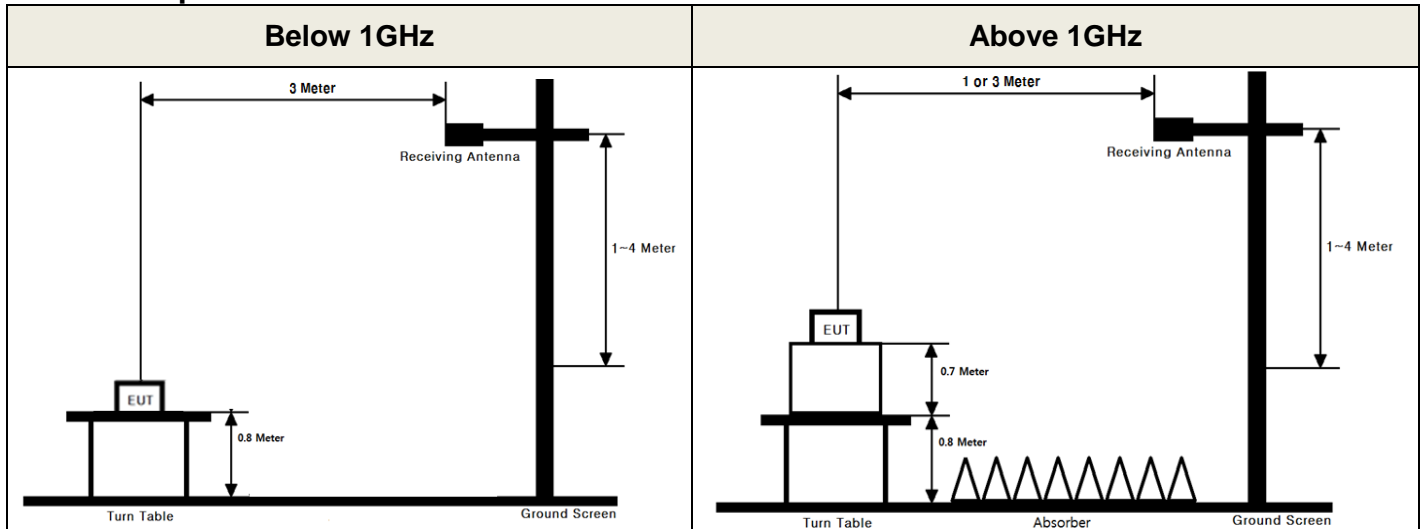

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

##### Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI 63.26-2015 – Section 5.2.4.4.1

##### Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW  $\geq$  3 x RBW.
4. Set number of points in sweep  $\geq$  2 x span / RBW.
5. Sweep time:
  - 1) Set = auto-couple, or
  - 2) Set  $\geq$  [10  $\times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

**ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP, dBi for EIRP]**

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

## 3.2. PEAK TO AVERAGE RATIO

### Test set-up

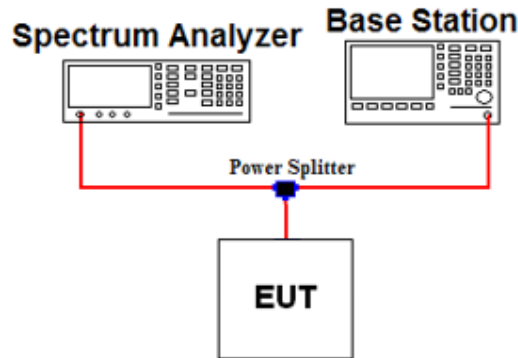

### Test Procedure

- KDB971168 D01v03 - Section 5.7.2
- ANSI C63.26-2015 – Section 5.2.3.4

A peak to average ratio measurement is performed at the conducted port of the EUT.

The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.

### Test setting

The spectrum Analyzer's CCDF measurement function is enabled.

1. Set resolution/measurement bandwidth  $\geq$  OBW or specified reference bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval as follows:
  - 1) For continuous transmissions, set to the greater of  $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$  or 1 ms.
  - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
  - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
4. Record the maximum PAPR level associated with a probability of 0.1 %.
5. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.



## ■ Alternate Procedure

- KDB971168 D01v03 - Section 5.7.3
- ANSI C63.26-2015 – Section 5.2.6

Use one of the measurement procedures of the peak power and record as  $P_{Pk}$ .

Use one of the measurement procedures of the average power and record as  $P_{Avg}$ .

Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm \text{ or } dBW) - P_{Avg} (dBm \text{ or } dBW).$$

Where,

PAPR peak-to-average power ratio, in dB

$P_{Pk}$  measured peak power or peak PSD level, in dBm or dBW

$P_{Avg}$  measured average power or average PSD level, in dBm or dBW

### - Peak Power Measurement


1. Set the RBW  $\geq$  OBW
2. Set VBW  $\geq$  3 x RBW
3. Set span  $\geq$  2 x RBW
4. Sweep time  $\geq$  10 x (number of points in sweep) x (transmission symbol period).
5. Detector = peak
6. Trace mode = max hold
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the peak amplitude level.

### - Average Power Measurement

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW  $\geq$  3 x RBW.
4. Set number of measurement points in sweep  $\geq$  2  $\times$  span / RBW..
5. Sweep time = 1 ) auto-couple, or  
2 ) set  $\geq$  [ 10 x (number of points in sweep) x (transmission period)] for single sweep (automation-compatible ( measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (RMS).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable Triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each Sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-Power transmissions)
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 3.3. OCCUPIED BANDWIDTH (99 % Bandwidth)

#### Test set-up

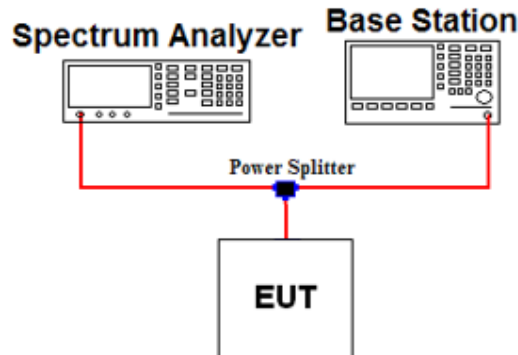

#### Offset value information

Frequency(MHz)	Offset Value(dB)	Frequency(MHz)	Offset Value(dB)
824.2	6.12	1 850.2	6.27
826.4	6.12	1 852.4	6.28
836.6	6.13	1 880.0	6.29
846.6	6.13	1 907.6	6.31
848.8	6.13	1 909.8	6.31
1 712.4	6.19	-	-
1 732.4	6.20	-	-
1 752.6	6.21	-	-

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.

#### Test Procedure

- KDB971168 D01v03 - Section 4.3
- ANSI C63.26-2015 – Section 5.4.4


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

#### Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 \% \sim 5 \%$  of the expected OBW &  $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within  $1 \% \sim 5 \%$  of the 99 % occupied bandwidth observed in step 6.

### 3.4. SPURIOUS EMISSIONS AT ANTENNA TERMINAL

#### Test set-up

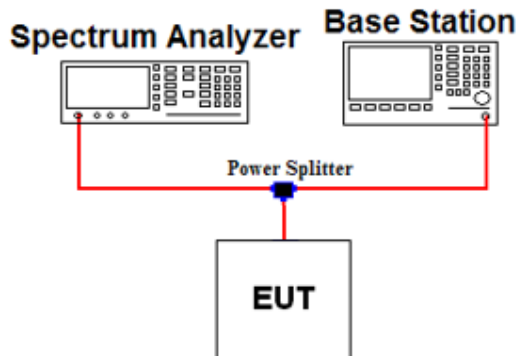

#### Offset value information

Frequency(MHz)	Offset Value(dB)	Frequency(MHz)	Offset Value(dB)
10 000	7.32	20 000	8.19
-	-	-	-

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.

#### Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 - Section 5.7

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths. The spectrum is scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, where P is the transmitter power in Watts.


#### Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW  $\geq 3 \times$  RBW ( Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point  $\geq 2 \times$  span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, 27

### 3.5. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

#### Test set-up

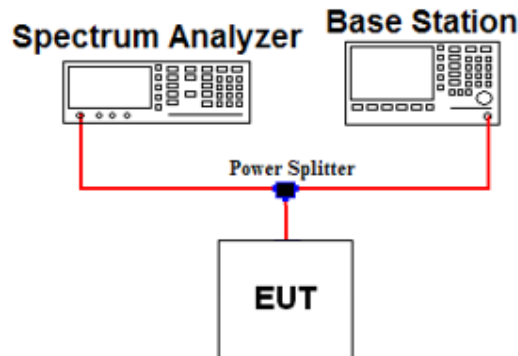

#### Offset value information

Frequency Range(MHz)	Offset Value (dB)	Frequency Range(MHz)	Offset Value (dB)	Frequency Range(MHz)	Offset Value (dB)
819 - 823	6.12	1 701 – 1 709	6.32	1 845 – 1 855	6.28
823 - 825	6.12	1 705 – 1 715	6.33	1 909 – 1 911	6.31
819 - 829	6.12	1 750 – 1 760	6.36	1 905 – 1 915	6.32
848 - 850	6.14	1 756 – 1 764	6.36	1 911 – 1 915	6.32
844 - 854	6.14	1 845 – 1 849	6.27	-	-
850 - 854	6.14	1 849 – 1 851	6.27	-	-

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.

#### Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 - Section 5.7

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all modulations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, where P is the transmitter power in Watts.

#### Test setting


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq 1\%$  of the emission
4. VBW  $\geq 3 \times$  RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point  $\geq 2 \times$  span / RBW
8. The trace was allowed to stabilize

Note 1: In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of **at least one percent** of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 3.6. RADIATED SPURIOUS EMISSIONS

#### Test Set-up

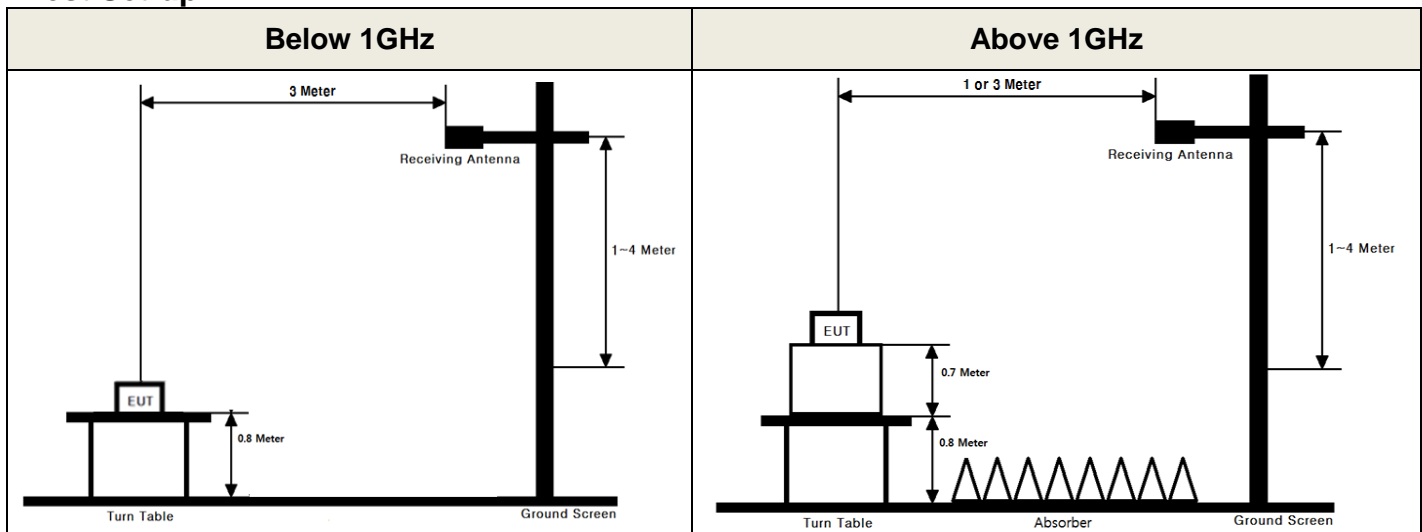

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

#### Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 - Section 5.5

#### Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW  $\geq$  3 X RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point  $\geq$  2 X span / RBW
5. The trace was allowed to stabilize


The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

For radiated spurious emission measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated spurious emission measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

### 3.7. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

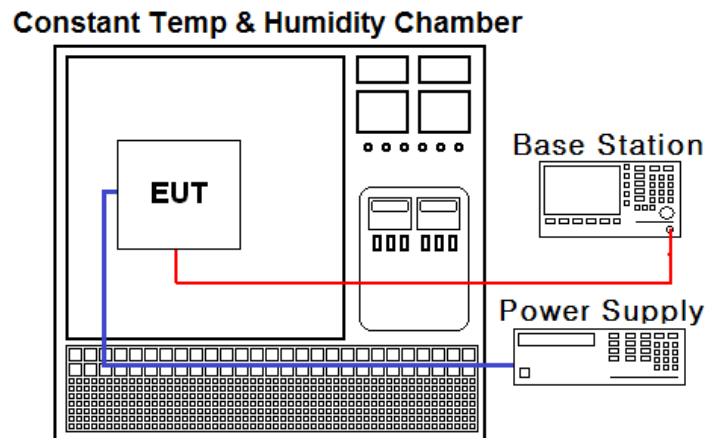

#### Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 - Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:**  
The temperature is varied from - 30 °C to + 50 °C in 10 °C increments using an environmental chamber.
- b.) **Primary Supply Voltage:**  
The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

#### Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24, 27. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency for Part 22.

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.  
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.  
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### 4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/06/24	23/06/24	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY48010133
DC power supply	Agilent Technologies	66332A	22/06/24	23/06/24	US37473422
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Power Splitter	Anritsu	K241B	22/12/16	23/12/16	1301184
Temp & Humi	SJ Science	SJ-TH-S50	22/06/22	23/06/22	SJ-TH-S50-130930
Radio Communication Analyzer	Agilent Technologies	E5515C	22/12/16	23/12/16	MY48360842
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
Loop Antenna	ETS-Lindgren	6502	22/12/16	24/12/16	00226186
BILOG ANTENNA	Schwarzbeck	VULB9160	22/12/16	23/12/16	3362
Dipole Antenna	Schwarzbeck	UHA9105	22/12/16	24/12/16	2262
HORN ANT	ETS	3117	22/12/16	23/12/16	00140394
HORN ANT	A.H.Systems	SAS-574	22/06/24	23/06/24	155
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
PreAmplifier	Agilent	8449B	22/06/24	23/06/24	3008A02108
PreAmplifier	tsj	MLA-1840-J02-45	22/06/24	23/06/24	16966-10728
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	22/06/24	23/06/24	7
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	22/06/24	23/06/24	2
High Pass Filter	Wainwright Instruments	WHKX6-6320-8000-26500-40CC	22/06/24	23/06/24	2
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-02
Cable	JUNKOSHA	MWX241/B	23/01/04	24/01/04	M-03
Cable	JUNKOSHA	MWX221	23/01/04	24/01/04	M-04
Cable	JUNKOSHA	MWX221	23/01/04	24/01/04	M-05
Cable	DTNC	Cable	23/01/04	24/01/04	M-06
Cable	JUNFLON	J12J101757-00	23/01/04	24/01/04	M-07
Cable	HUBER+SUHNER	SUCOFLEX104	23/01/04	24/01/04	M-08
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-09
Cable	JUNKOSHA	MWX241	23/01/03	24/01/03	mmW-1
Cable	JUNKOSHA	MWX241	23/01/03	24/01/03	mmW-4
Cable	Dt&C	Cable	23/01/04	24/01/04	RFC-44

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Parameter	Status Note 1
2.1046	-	Conducted Output Power	C
22.913(a) 24.232(c) 27.50(d.4)	RSS-132 [5.4] RSS-133 [6.4] RSS-139 [5.5]	Effective Radiated Power Equivalent Isotropic Radiated Power	C <sup>Note2</sup>
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	C
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132 [5.5] RSS-133 [6.5] RSS-139 [5.6]	Band Edge Emissions at Antenna Terminal Spurious Emissions at Antenna Terminal	C
24.232(d) 27.50(d.5)	RSS-132 [5.4] RSS-133 [6.4] RSS-139 [5.5]	Peak to Average Ratio	C
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132 [5.5] RSS-133 [6.5] RSS-139 [5.6]	Radiated Spurious and Harmonic Emissions	C <sup>Note2</sup>
2.1055 22.355 24.235 27.54	RSS-132 [5.3] RSS-133 [6.3] RSS-139 [5.4]	Frequency Stability	C
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported.			



## 6. EMISSION DESIGNATOR AND SAMPLE CALCULATION

### A. Emission Designator

#### GSM850 Emission Designator

Emission Designator = **247KGXW**  
GSM OBW = 246.93 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

#### EDGE850 Emission Designator

Emission Designator = **249KG7W**  
EDGE OBW = 248.84 kHz  
G = Phase Modulation  
7 = Cases not otherwise covered  
W = Combination (Audio/Data)

#### WCDMA850 Emission Designator

Emission Designator = **4M15F9W**  
WCDMA OBW = 4.149 1 MHz  
F = Frequency Modulation  
9 = Composite Digital Information  
W = Combination (Audio/Data)

### B. For substitution method

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4).  
(ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

$$\underline{\text{EIRP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBi)}}$$


$$\underline{\text{ERP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBd)}}$$

Where, TX Antenna Gain (dBd) = TX Antenna Gain (dBi) - 2.15 dB

## 7. TEST DATA

### 7.1. CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

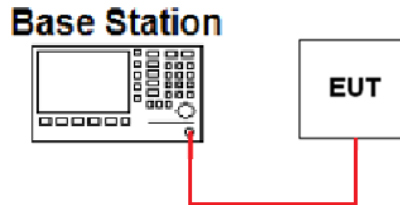

Note 1: The conducted output power was measured using the Agilent E5515C

#### ▪ GPRS/EDGE

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		GSM Voice	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	-	31.41	29.97	27.84	26.35	25.28	25.11	24.88	24.71
	190	-	31.37	29.95	27.52	26.41	25.21	25.07	24.84	24.68
	251	-	31.35	30.02	27.70	26.47	25.25	25.05	24.89	24.62
PCS	512	-	27.73	26.45	24.22	22.85	23.74	23.42	23.13	22.68
	661	-	28.17	26.52	24.33	22.92	24.12	23.91	23.63	22.97
	810	-	28.02	26.37	24.36	22.93	24.01	23.63	23.02	22.81

**WCDMA**

Mode		WCDMA850 (dBm)		
		4132	4183	4233
WCDMA	12.2 kbps RMC	21.86	21.76	21.85
	12.2 kbps AMR	-	-	-
HSDPA	Subtest 1	20.86	20.73	20.81
	Subtest 2	20.82	20.72	20.82
	Subtest 3	20.34	20.24	20.34
	Subtest 4	20.35	20.23	20.32
HSUPA	Subtest 1	20.83	20.22	20.81
	Subtest 2	19.81	19.70	19.81
	Subtest 3	20.34	20.25	20.35
	Subtest 4	19.82	19.73	19.82
	Subtest 5	20.84	20.72	20.83

Mode		WCDMA1700 (dBm)		
		1312	1412	1513
WCDMA	12.2 kbps RMC	22.27	22.16	22.07
	12.2 kbps AMR	-	-	-
HSDPA	Subtest 1	21.22	21.12	21.04
	Subtest 2	21.22	21.13	21.05
	Subtest 3	20.76	20.67	20.56
	Subtest 4	20.76	20.65	20.58
HSUPA	Subtest 1	21.26	19.63	21.05
	Subtest 2	19.30	19.17	19.11
	Subtest 3	20.25	19.63	20.07
	Subtest 4	19.28	19.16	19.09
	Subtest 5	21.26	21.19	21.09

Mode		WCDMA1900 (dBm)		
		9262	9400	9538
WCDMA	12.2 kbps RMC	21.92	21.89	21.86
	12.2 kbps AMR	-	-	-
HSDPA	Subtest 1	20.91	20.82	20.82
	Subtest 2	20.94	20.82	20.83
	Subtest 3	20.44	20.36	20.32
	Subtest 4	20.46	20.36	20.33
HSUPA	Subtest 1	20.93	20.87	20.85
	Subtest 2	18.92	18.89	18.88
	Subtest 3	20.00	19.87	19.84
	Subtest 4	19.02	18.91	18.86
	Subtest 5	20.98	20.89	20.86

## 7.2. PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

## 7.3. OCCUPIED BANDWIDTH (99 % Bandwidth)

Mode	Channel	Frequency (MHz)	Test Result (kHz)
GSM850	128	824.20	246.89
	190	836.60	246.33
	251	848.80	<b>246.93</b>
EDGE850	128	824.20	244.40
	190	836.60	<b>248.84</b>
	251	848.80	245.75
WCDMA850	4132	826.40	4134.00
	4183	836.60	<b>4149.10</b>
	4233	846.60	4135.00
WCDMA1700	1312	1712.40	4139.10
	1412	1732.40	<b>4152.10</b>
	1513	1752.60	4133.50
GSM1900	512	1850.20	243.62
	661	1880.00	244.53
	810	1909.80	<b>250.27</b>
EDGE1900	512	1850.20	244.46
	661	1880.00	245.45
	810	1909.80	<b>245.61</b>
WCDMA1900	9262	1852.40	4150.90
	9400	1880.00	<b>4164.10</b>
	9538	1907.60	4158.60

#### **7.4. SPURIOUS MISSIONS AT ANTENNA TERMINAL**

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

#### **7.5. BAND EDGE EMISSIONS AT ANTENNA TERMINAL**

- Plots of the EUT's Band Edge are shown in Clause 8.4

## 7.6. EFFECTIVE RADIATED POWER

### - Test Notes

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. The worst case data is reported.

### - GSM850 data

Mode	Frequency (MHz)	Ant Pol(H/V)	Level at Antenna Terminal (dBm)	Substitute Antenna Gain(dBd)	ERP (dBm)	ERP (W)	Note.
GSM850	824.2	H	29.50	-1.43	28.07	0.641	-
<b>GSM850</b>	<b>836.6</b>	<b>H</b>	<b>29.98</b>	<b>-1.44</b>	<b>28.54</b>	<b>0.714</b>	-
GSM850	848.8	H	29.74	-1.46	28.28	0.673	-
EDGE850	836.6	H	23.96	-1.44	22.52	0.179	-

### - WCDMA850 data

Mode	Frequency (MHz)	Ant Pol(H/V)	Level at Antenna Terminal (dBm)	Substitute Antenna Gain(dBd)	ERP (dBm)	ERP (W)	Note.
WCDMA850	826.4	H	19.57	-1.43	18.14	0.065	-
<b>WCDMA850</b>	<b>836.6</b>	<b>H</b>	<b>19.87</b>	<b>-1.44</b>	<b>18.43</b>	<b>0.070</b>	-
WCDMA850	846.6	H	19.75	-1.46	18.29	0.067	-

## 7.7. EQUIVALENT ISOTROPIC RADIATED POWER

### - Test Notes

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. The worst case data is reported.

### - WCDMA1700 data

Mode	Frequency (MHz)	Ant Pol(H/V)	Level at Antenna Terminal (dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)	Note.
<b>WCDMA1700</b>	<b>1 712.4</b>	<b>V</b>	<b>14.89</b>	<b>5.91</b>	<b>20.80</b>	<b>0.120</b>	-
WCDMA1700	1 732.4	V	15.11	5.68	20.79	0.120	-
WCDMA1700	1 752.6	V	14.50	5.46	19.96	0.099	-

### - GSM1900 data

Mode	Frequency (MHz)	Ant Pol(H/V)	Level at Antenna Terminal (dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)	Note.
GSM1900	1 850.2	V	22.32	4.67	26.99	0.500	-
<b>GSM1900</b>	<b>1 880.0</b>	<b>V</b>	<b>23.16</b>	<b>4.52</b>	<b>27.68</b>	<b>0.586</b>	-
GSM1900	1 909.8	V	23.04	4.45	27.49	0.561	-
EDGE1900	1 880.0	V	19.28	4.52	23.80	0.240	-

### - WCDMA1900 data

Mode	Frequency (MHz)	Ant Pol(H/V)	Level at Antenna Terminal (dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)	Note.
WCDMA1900	1 852.4	V	16.34	4.66	21.00	0.126	-
<b>WCDMA1900</b>	<b>1 880.0</b>	<b>V</b>	<b>16.69</b>	<b>4.52</b>	<b>21.21</b>	<b>0.132</b>	-
WCDMA1900	1 907.6	V	16.73	4.44	21.17	0.131	-



## 7.8. RADIATED SPURIOUS EMISSIONS

### - Test Notes

1. This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. The worst case data is reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions.
3. Limit = -13dBm

### - GSM850 data

Tx Freq. (MHz)	Freq. (MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBd)	Correct Generator Level(dBm)	Limit (dBm)	Margin (dB)	Note
824.2	1 648.27	V	-44.72	3.56	-41.16	-13.00	28.16	-
	2 472.71	V	-55.14	4.01	-51.13	-13.00	38.13	-
836.6	1 673.36	V	-46.00	3.51	-42.49	-13.00	29.49	-
	2 509.52	V	-52.37	4.10	-48.27	-13.00	35.27	-
848.8	1 697.68	V	-44.18	3.46	-40.72	-13.00	27.72	-
	2 546.68	V	-53.50	4.19	-49.31	-13.00	36.31	-

### - WCDMA850 data

Tx Freq. (MHz)	Freq. (MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBd)	Correct Generator Level(dBm)	Limit (dBm)	Margin (dB)	Note
826.4	1 653.18	V	-58.45	3.55	-54.90	-13.00	41.90	-
836.6	1 673.42	V	-58.70	3.51	-55.19	-13.00	42.19	-
846.6	1 694.64	V	-57.14	3.46	-53.68	-13.00	40.68	-

**- WCDMA1700 data**

Tx Freq. (MHz)	Freq. (MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Correct Generator Level(dBm)	Limit (dBm)	Margin (dB)	Note
1 712.4	3 424.58	V	-57.74	8.10	-49.64	-13.00	36.64	-
1 732.4	3 464.79	V	-57.38	8.17	-49.21	-13.00	36.21	-
1 752.6	3 505.29	V	-57.82	8.23	-49.59	-13.00	36.59	-

**- GSM1900 data**

Tx Freq. (MHz)	Freq. (MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Correct Generator Level(dBm)	Limit (dBm)	Margin (dB)	Note
1 850.2	3 700.45	V	-54.76	8.49	-46.27	-13.00	33.27	-
	5 550.78	V	-50.00	10.16	-39.84	-13.00	26.84	-
1 880.0	3 760.00	V	-56.91	8.57	-48.34	-13.00	35.34	-
	5 640.17	V	-56.11	10.22	-45.89	-13.00	32.89	-
1 909.8	3 819.54	V	-56.33	8.65	-47.68	-13.00	34.68	-

**- WCDMA1900 data**

Tx Freq. (MHz)	Freq. (MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Correct Generator Level(dBm)	Limit (dBm)	Margin (dB)	Note
1 852.4	3 704.39	V	-57.31	8.49	-48.82	-13.00	35.82	-
1 880.0	3 760.06	V	-58.35	8.57	-49.78	-13.00	36.78	-
1 907.6	3 815.54	V	-57.83	8.64	-49.19	-13.00	36.19	-

## 7.9. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### - Test Notes.

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

### 7.9.1. FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836.60 MHz  
 REFERENCE VOLTAGE : 12 V DC  
 LIMIT(FCC) : 2.5 ppm  
 LIMIT(IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(%)	(ppm)
100 %	12.00	+20(Ref)	836,600,022	+0.000 002 6	+0.026
100 %		-30	836,600,017	+0.000 002 0	+0.020
100 %		-20	836,600,028	+0.000 003 3	+0.033
100 %		-10	836,600,019	+0.000 002 3	+0.023
100 %		0	836,600,025	+0.000 003 0	+0.030
100 %		+10	836,600,007	+0.000 000 8	+0.008
100 %		+20	836,600,022	+0.000 002 6	+0.026
100 %		+30	836,600,021	+0.000 002 5	+0.025
100 %		+40	836,600,025	+0.000 003 0	+0.030
100 %		+50	836,600,027	+0.000 003 2	+0.032
115 %		13.80	+20	836,600,015	+0.000 001 8
85 %	10.20	+20	836,600,026	+0.000 003 1	+0.031

### 7.9.2. FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836.60 MHz  
 REFERENCE VOLTAGE : 12 V DC  
 LIMIT(FCC) : 2.5 ppm  
 LIMIT(IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(%)	(ppm)
100 %	12.00	+20(Ref)	836,599,998	-0.000 000 2	-0.002
100 %		-30	836,599,999	-0.000 000 1	-0.001
100 %		-20	836,599,998	-0.000 000 2	-0.002
100 %		-10	836,599,997	-0.000 000 4	-0.004
100 %		0	836,599,999	-0.000 000 1	-0.001
100 %		+10	836,599,999	-0.000 000 1	-0.001
100 %		+20	836,599,998	-0.000 000 2	-0.002
100 %		+30	836,599,998	-0.000 000 2	-0.002
100 %		+40	836,599,997	-0.000 000 4	-0.004
100 %		+50	836,599,996	-0.000 000 5	-0.005
115 %		13.80	+20	836,599,999	-0.000 000 1
85 %	10.20	+20	836,599,998	-0.000 000 2	-0.002

### 7.9.3. FREQUENCY STABILITY (WCDMA1700)

OPERATING FREQUENCY : 1732.40 MHz

REFERENCE VOLTAGE : 12 V DC

LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(%)	(ppm)
100 %	12.00	+20(Ref)	1,732,399,995	-0.000 000 3	-0.003
100 %		-30	1,732,399,994	-0.000 000 3	-0.003
100 %		-20	1,732,399,996	-0.000 000 2	-0.002
100 %		-10	1,732,399,995	-0.000 000 3	-0.003
100 %		0	1,732,399,997	-0.000 000 2	-0.002
100 %		+10	1,732,399,996	-0.000 000 2	-0.002
100 %		+20	1,732,399,995	-0.000 000 3	-0.003
100 %		+30	1,732,399,997	-0.000 000 2	-0.002
100 %		+40	1,732,399,997	-0.000 000 2	-0.002
100 %		+50	1,732,399,994	-0.000 000 3	-0.003
115 %		13.80	+20	1,732,399,996	-0.000 000 2
85 %	10.20	+20	1,732,399,995	-0.000 000 3	-0.003

### 7.9.4. FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1880.00 MHz  
 REFERENCE VOLTAGE : 12 V DC  
 LIMIT(FCC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.  
 LIMIT(IC) : 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(%)	(ppm)
100 %	12.00	+20(Ref)	1,880,000,018	+0.000 001 0	+0.010
100 %		-30	1,880,000,016	+0.000 000 9	+0.009
100 %		-20	1,880,000,018	+0.000 001 0	+0.010
100 %		-10	1,880,000,017	+0.000 000 9	+0.009
100 %		0	1,880,000,013	+0.000 000 7	+0.007
100 %		+10	1,880,000,021	+0.000 001 1	+0.011
100 %		+20	1,880,000,018	+0.000 001 0	+0.010
100 %		+30	1,880,000,019	+0.000 001 0	+0.010
100 %		+40	1,880,000,008	+0.000 000 4	+0.004
100 %		+50	1,880,000,011	+0.000 000 6	+0.006
115 %		13.80	+20	1,880,000,016	+0.000 000 9
85 %	10.20	+20	1,880,000,020	+0.000 001 1	+0.011



### 7.9.5. FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1880.00 MHz  
 REFERENCE VOLTAGE : 12 V DC  
 LIMIT(FCC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.  
 LIMIT(IC) : 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(%)	(ppm)
100 %	12.00	+20(Ref)	1,879,999,996	-0.000 000 2	-0.002
100 %		-30	1,879,999,997	-0.000 000 2	-0.002
100 %		-20	1,879,999,996	-0.000 000 2	-0.002
100 %		-10	1,879,999,995	-0.000 000 3	-0.003
100 %		0	1,879,999,998	-0.000 000 1	-0.001
100 %		+10	1,879,999,996	-0.000 000 2	-0.002
100 %		+20	1,879,999,996	-0.000 000 2	-0.002
100 %		+30	1,879,999,997	-0.000 000 2	-0.002
100 %		+40	1,879,999,998	-0.000 000 1	-0.001
100 %		+50	1,879,999,994	-0.000 000 3	-0.003
115 %		13.80	+20	1,879,999,995	-0.000 000 3
85 %	10.20	+20	1,879,999,997	-0.000 000 2	-0.002

## 8. TEST PLOTS


### 8.1. PEAK TO AVERAGE RATIO

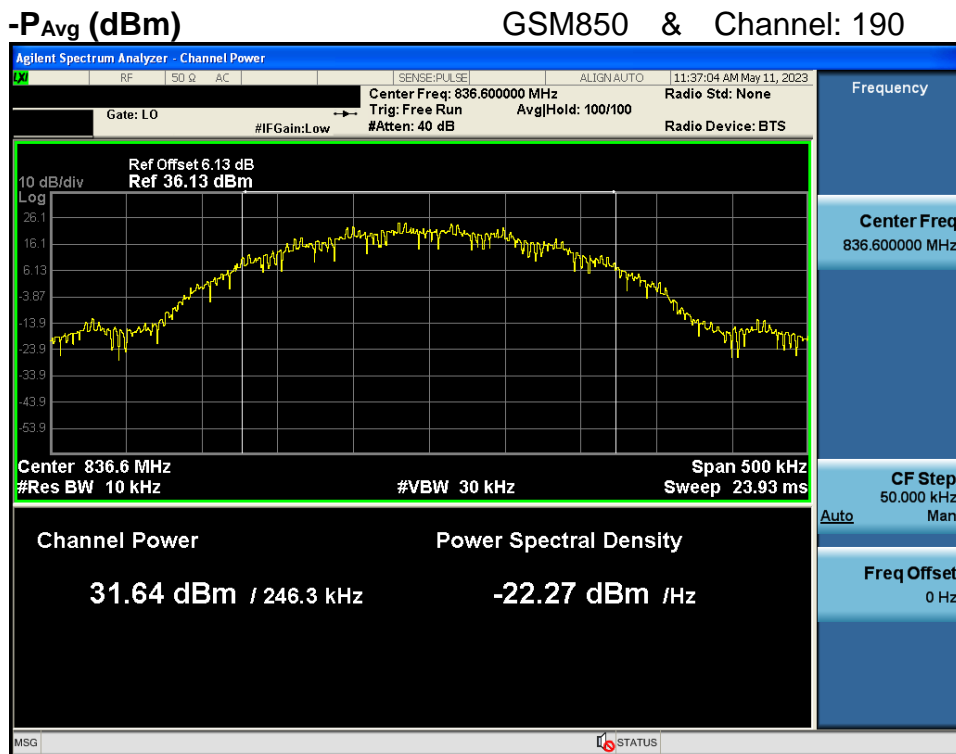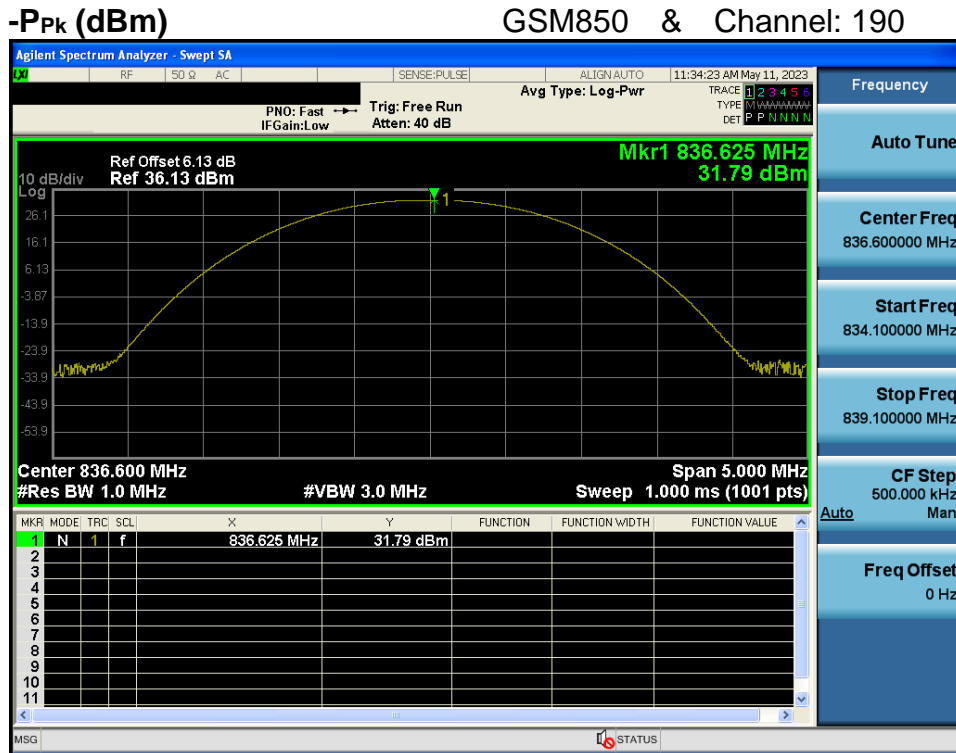


$$\text{PAPR (dB)} = P_{PK} \text{ (dBm)} - P_{AVG} \text{ (dBm)} = 31.79 \text{ dBm} - 31.64 \text{ dBm} = 0.15 \text{ dB}$$



**-P<sub>PK</sub> (dBm)** EDGE850 & Channel: 190

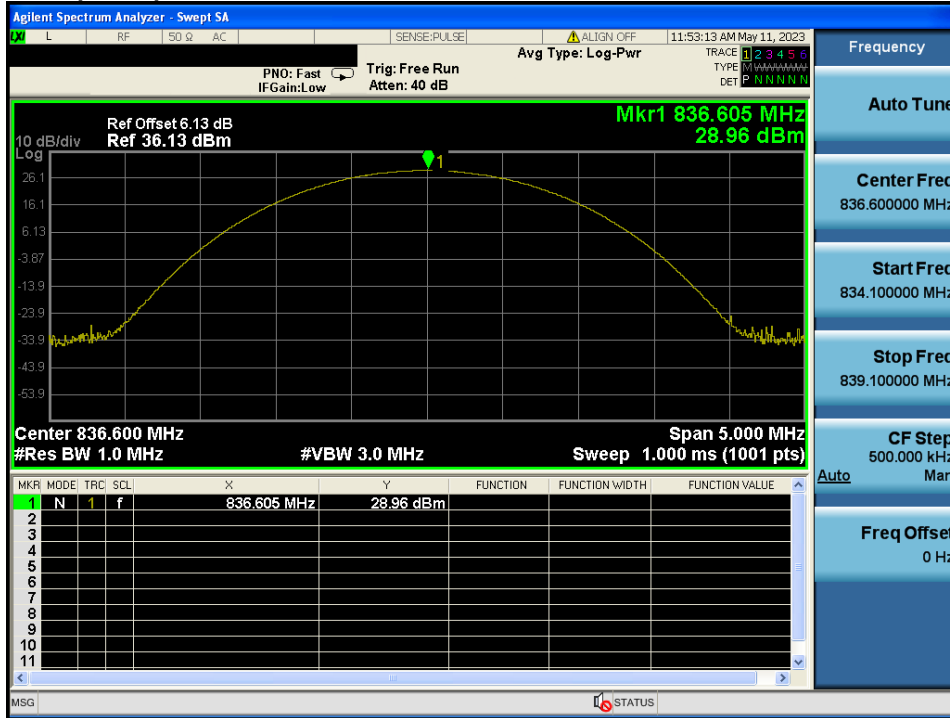


**-P<sub>Avg</sub> (dBm)** EDGE850 & Channel: 190

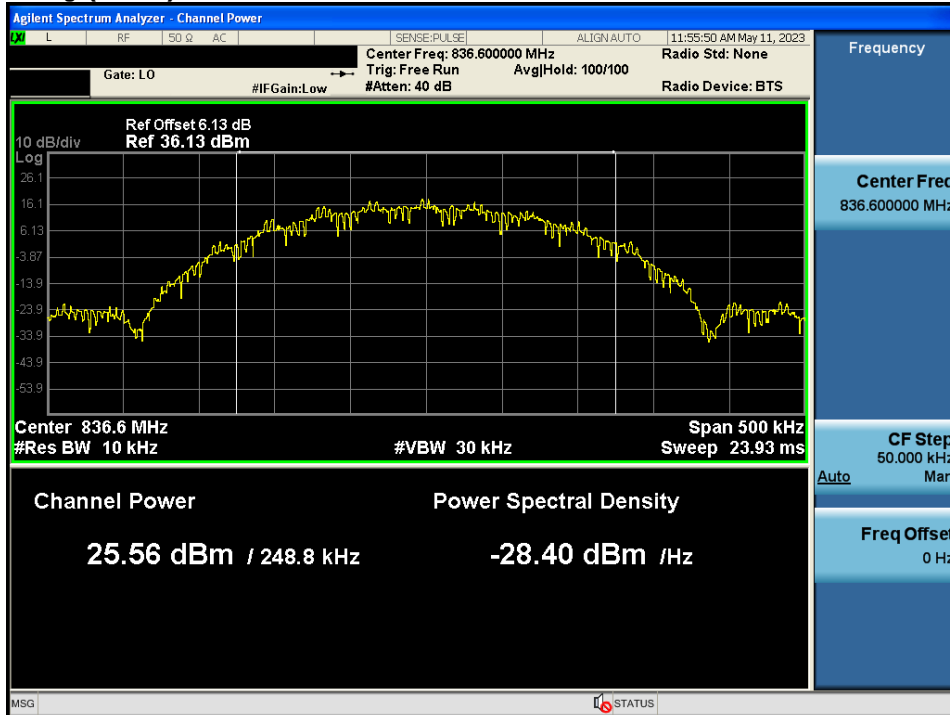


$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) = 28.96 \text{ dBm} - 25.56 \text{ dBm} = 3.40 \text{ dB}$$


WCDMA850 & Channel: 4 132

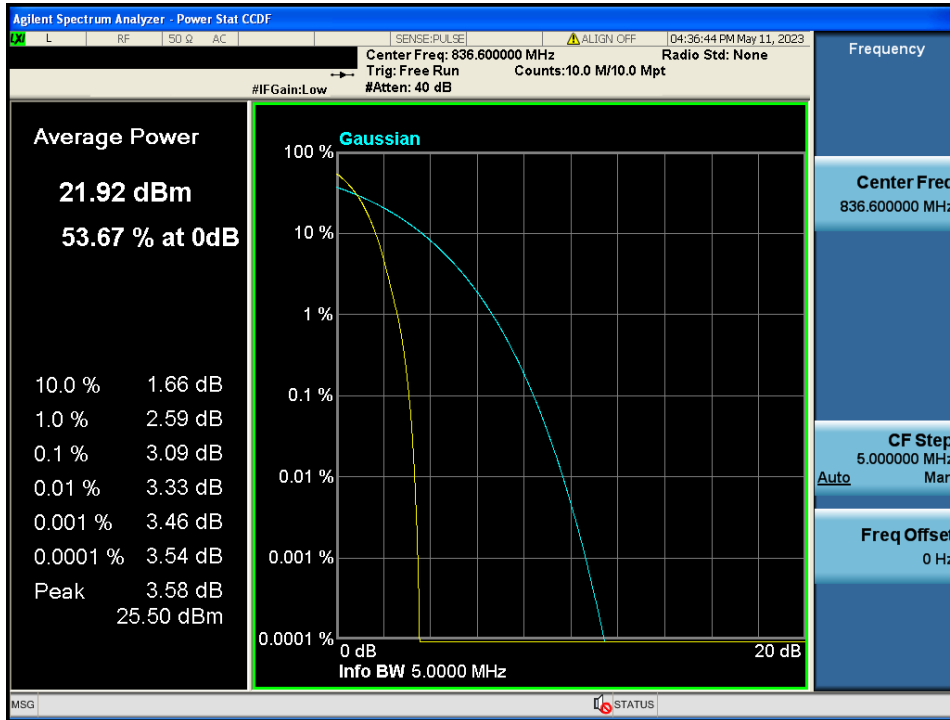

WCDMA1700 & Channel: 1 412

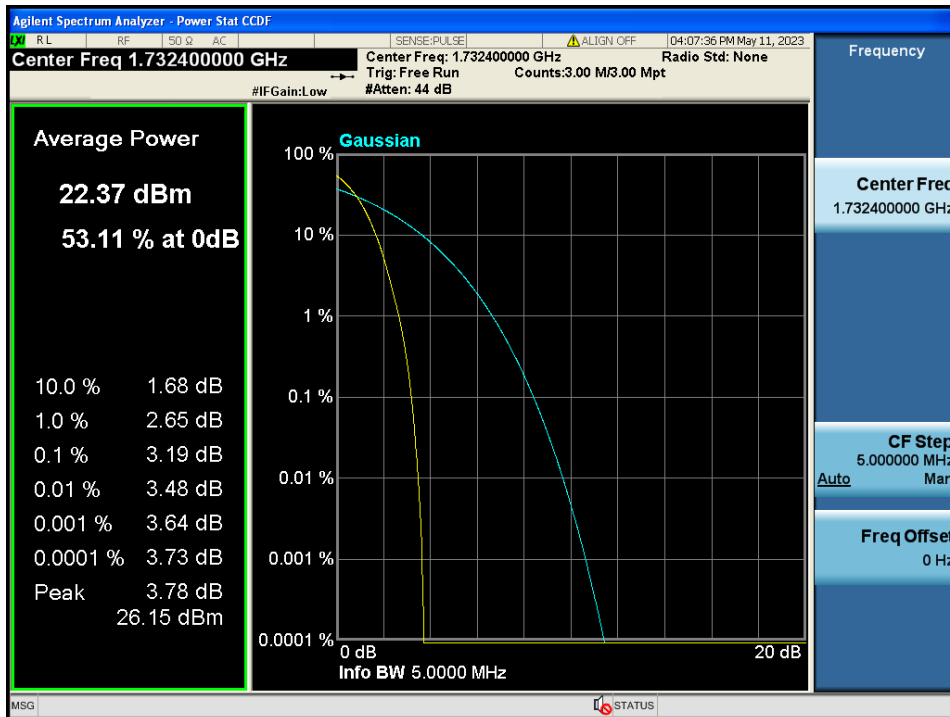

**-P<sub>Pk</sub> (dBm)** GSM1900 & Channel: 661

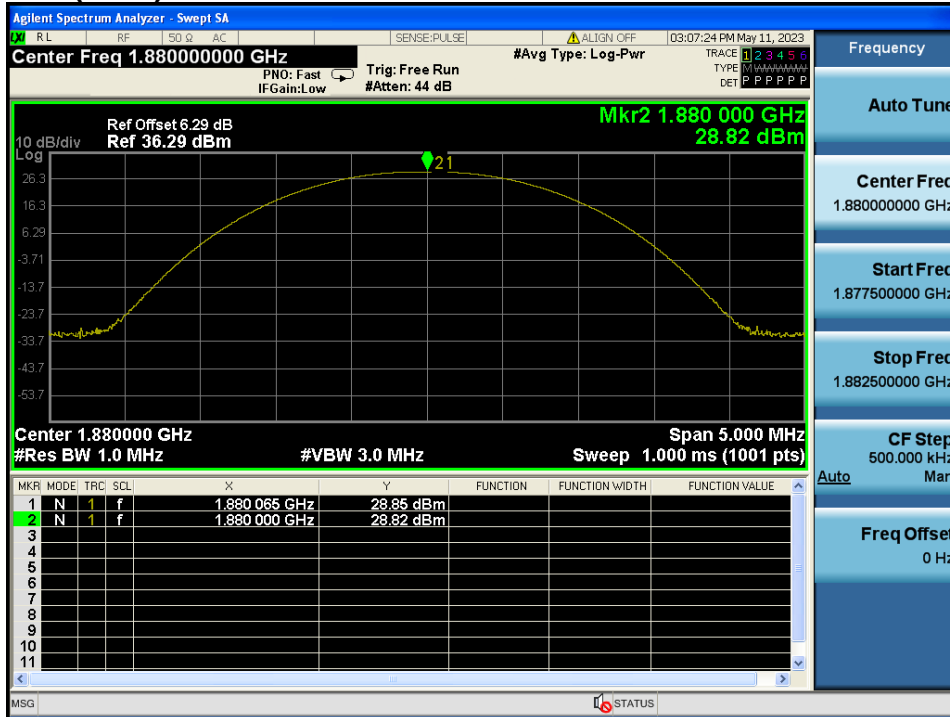

**-P<sub>Avg</sub> (dBm)** GSM1900 & Channel: 661




**PAPR (dB) = P<sub>Pk</sub> (dBm) - P<sub>Avg</sub> (dBm) = 28.85 dBm – 28.48 dBm = 0.37 dB**

**-P<sub>Pk</sub> (dBm)** EDGE1900 & Channel: 661




**-P<sub>Avg</sub> (dBm)** EDGE1900 & Channel: 661

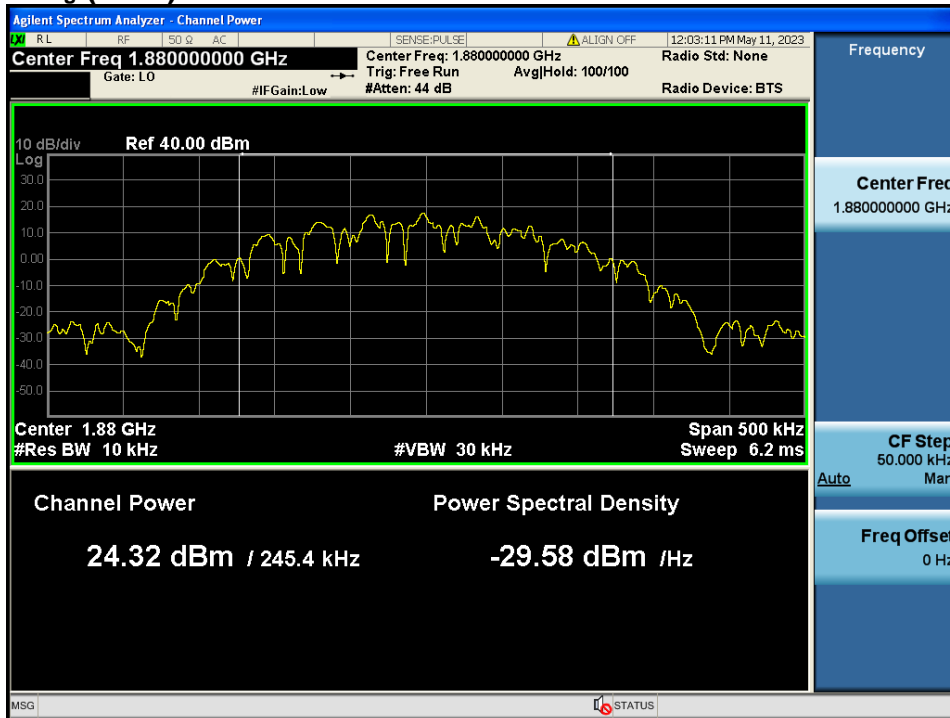


**PAPR (dB) = P<sub>Pk</sub> (dBm) - P<sub>Avg</sub> (dBm) = 28.05 dBm – 24.32 dBm = 3.73 dB**

WCDMA1900 & Channel: 9 400

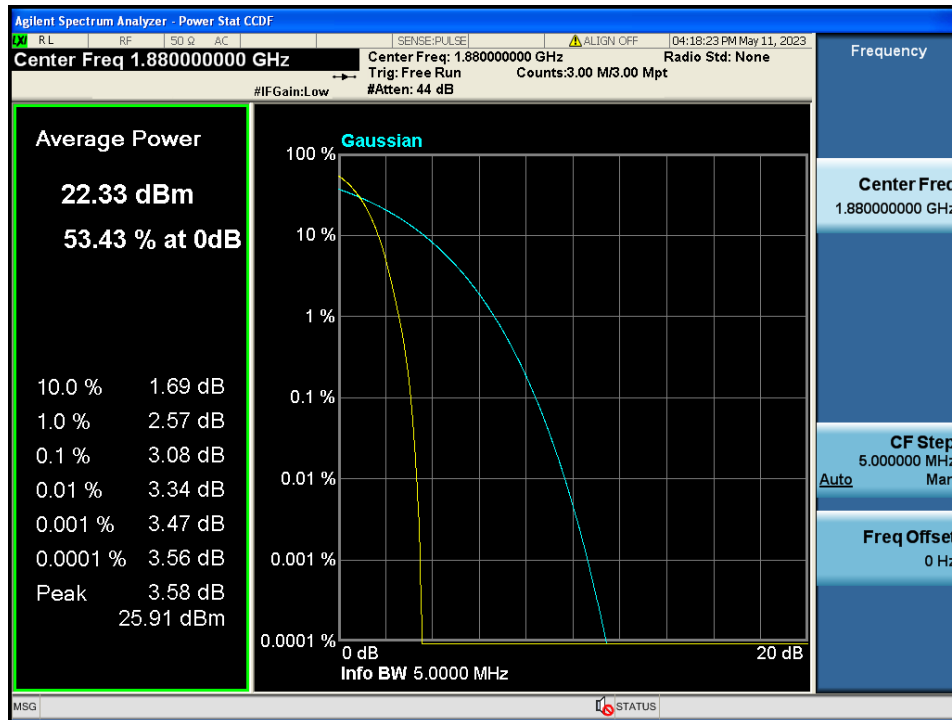





EDGE850 & Channel: 128

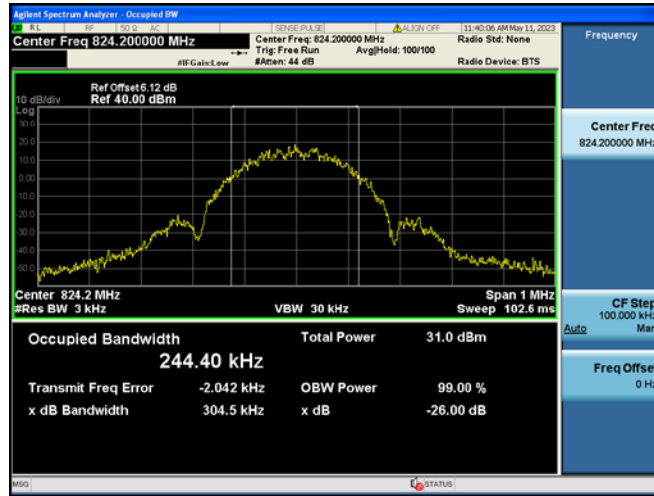


EDGE850 & Channel: 190

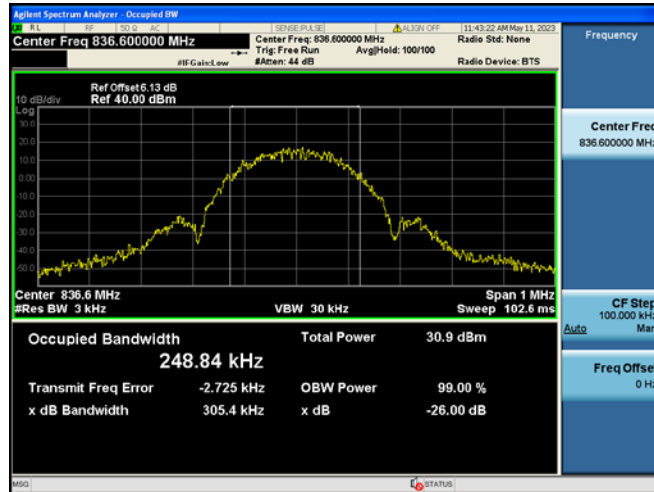


EDGE850 & Channel: 251

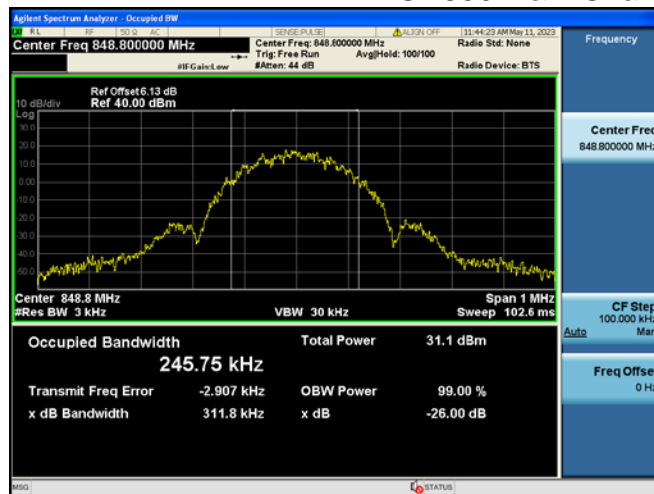


WCDMA850 & Channel: 4 132

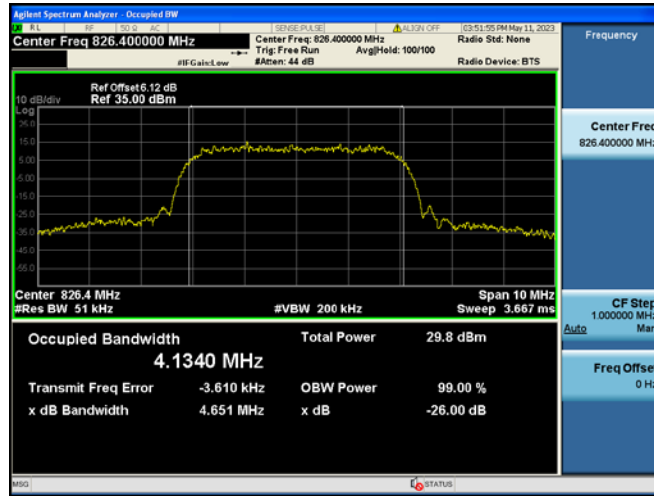

WCDMA850 & Channel: 4 183

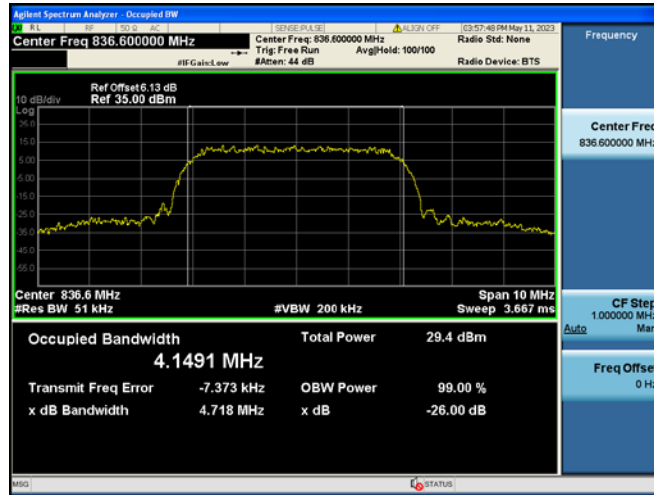


WCDMA850 & Channel: 4 233

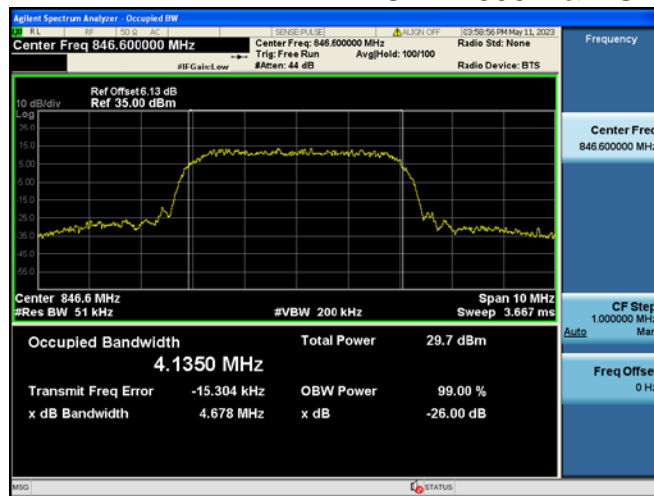





WCDMA1700 & Channel: 1 312

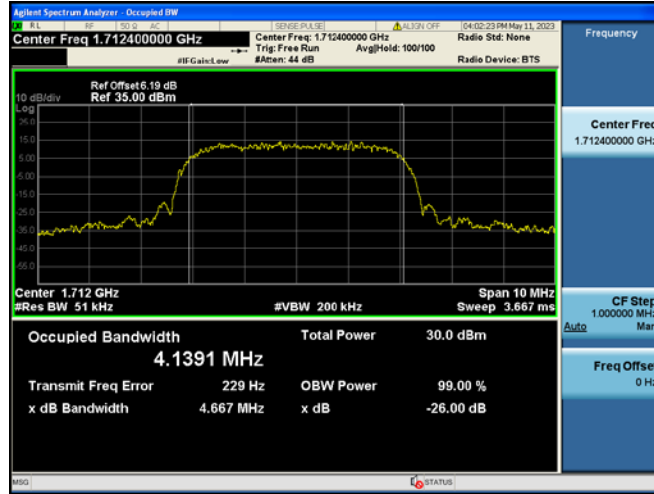


WCDMA1700 & Channel: 1 412

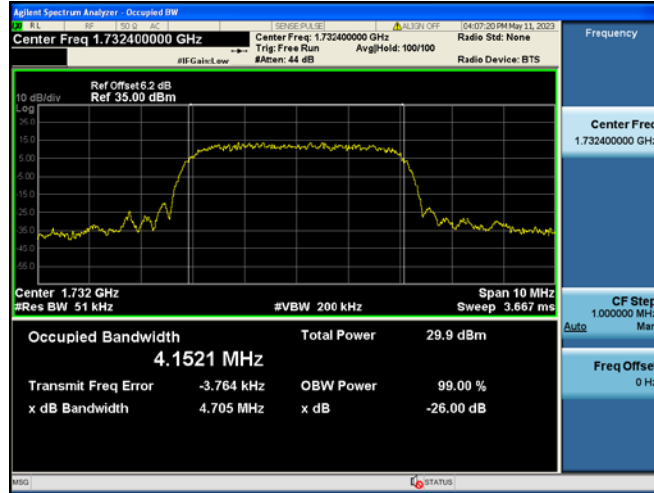


WCDMA1700 & Channel: 1 513

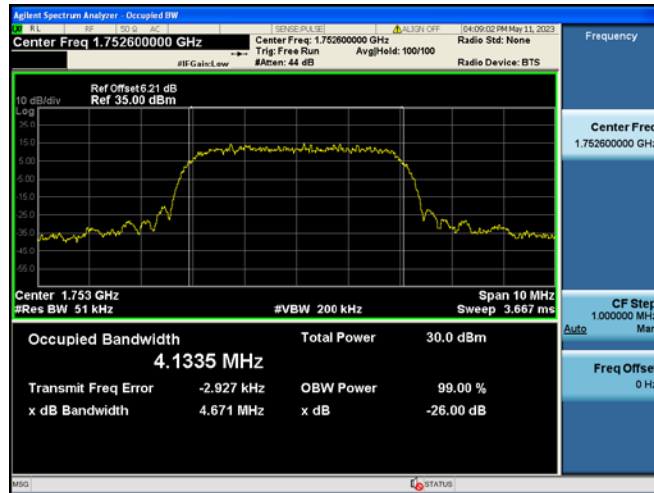


GSM1900 & Channel: 512

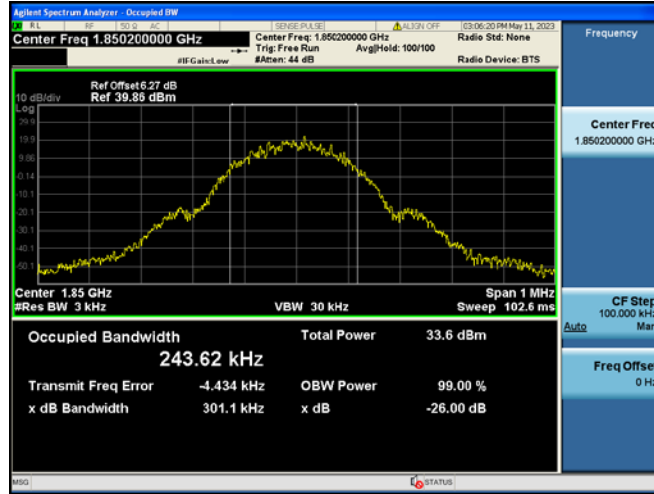


GSM1900 & Channel: 661

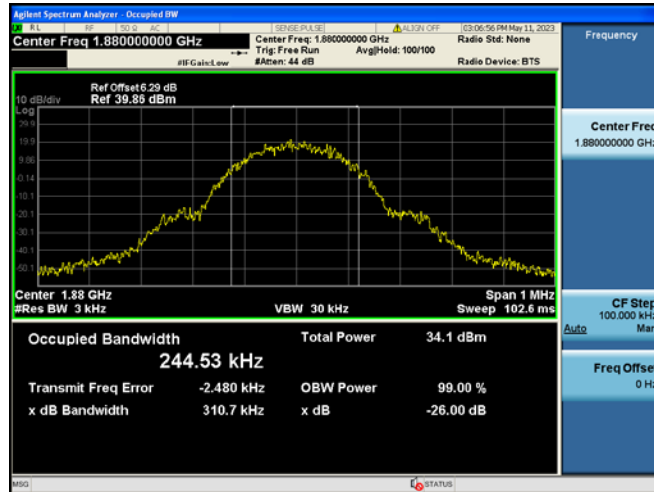


GSM1900 & Channel: 810

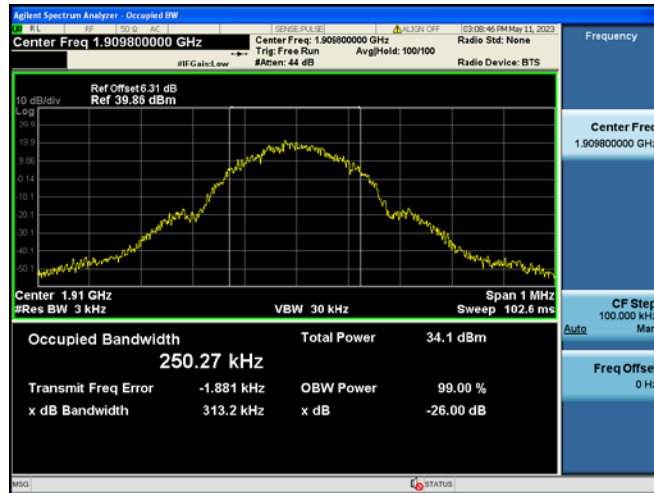


EDGE1900 & Channel: 512

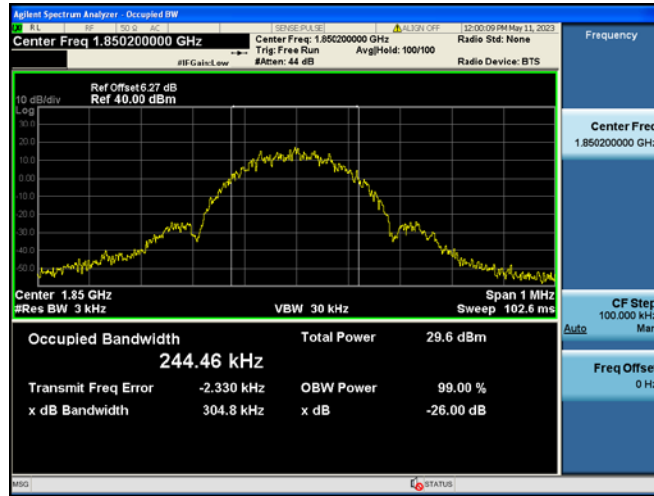


EDGE1900 & Channel: 661

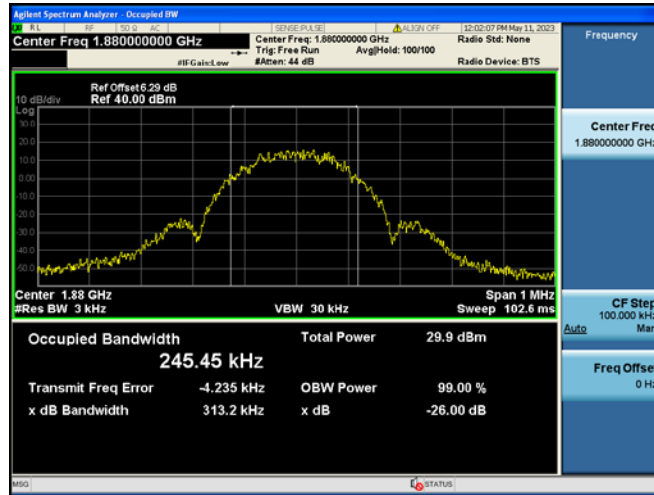


EDGE1900 & Channel: 810

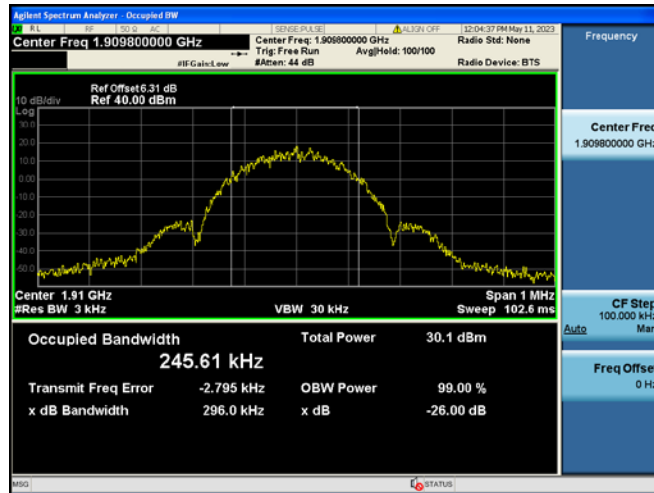


WCDMA1900 & Channel: 9 262

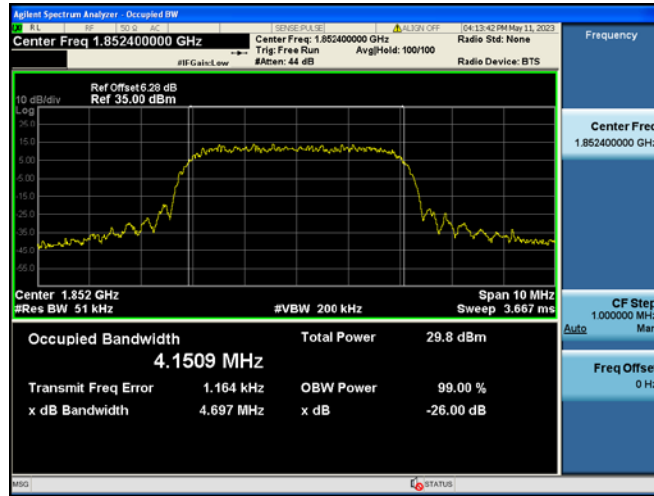

WCDMA1900 & Channel: 9 400

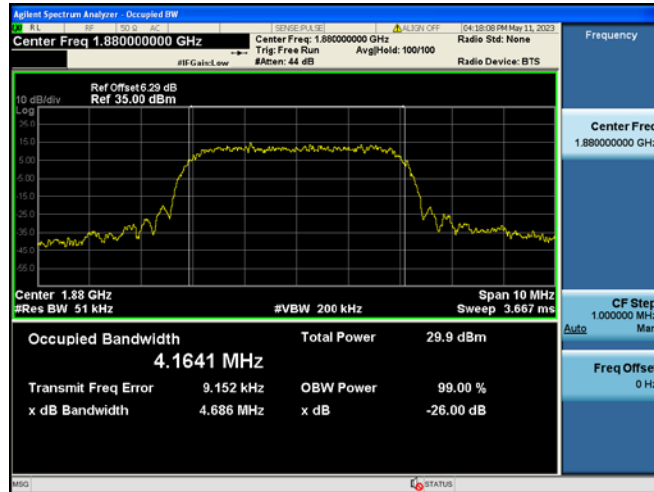


WCDMA1900 & Channel: 9 538

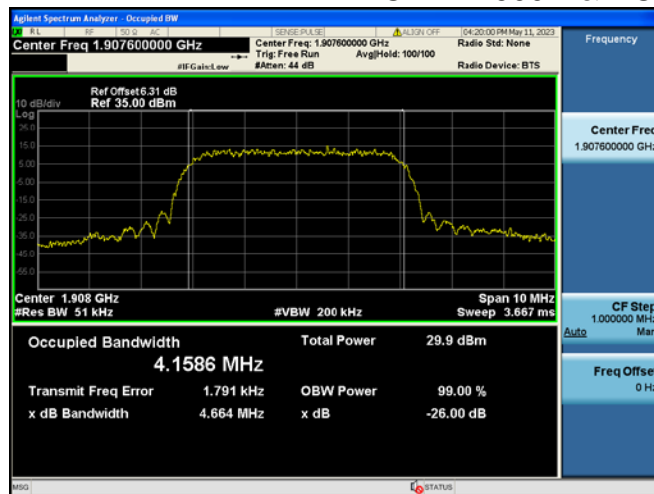


### 8.3. SPURIOUS EMISSIONS AT ANTENNA TERMINAL


#### GSM850 & Channel: 128

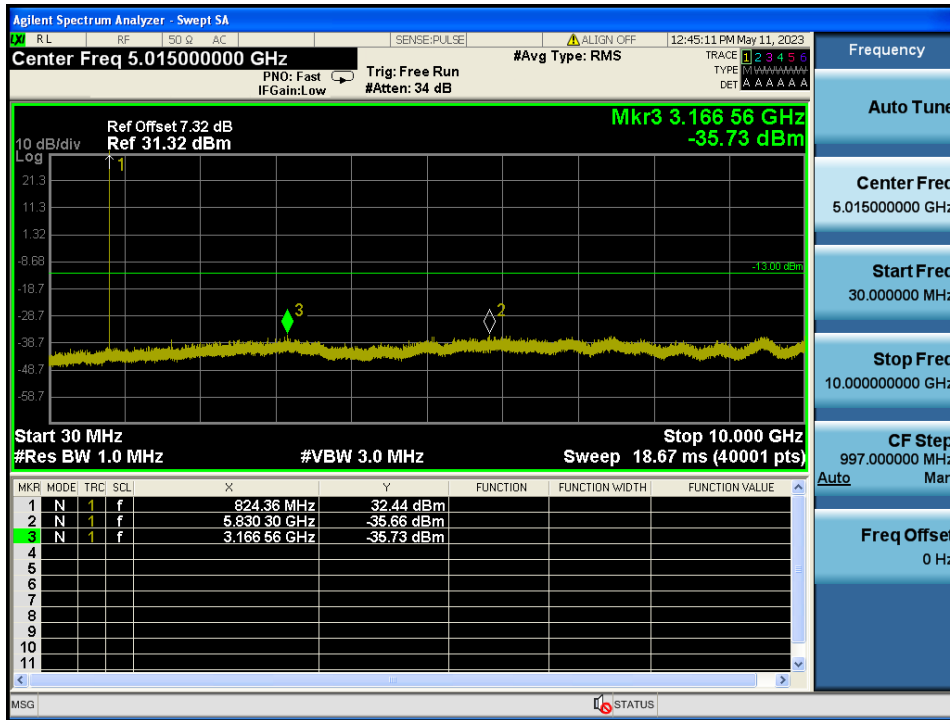


#### GSM850 & Channel: 190

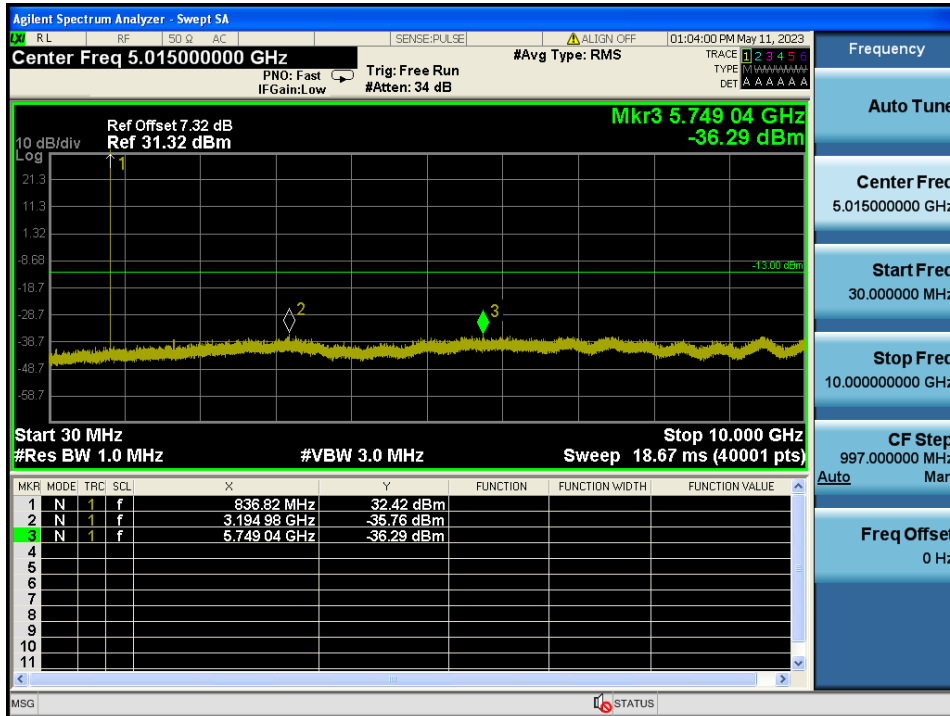


GSM850 & Channel: 251

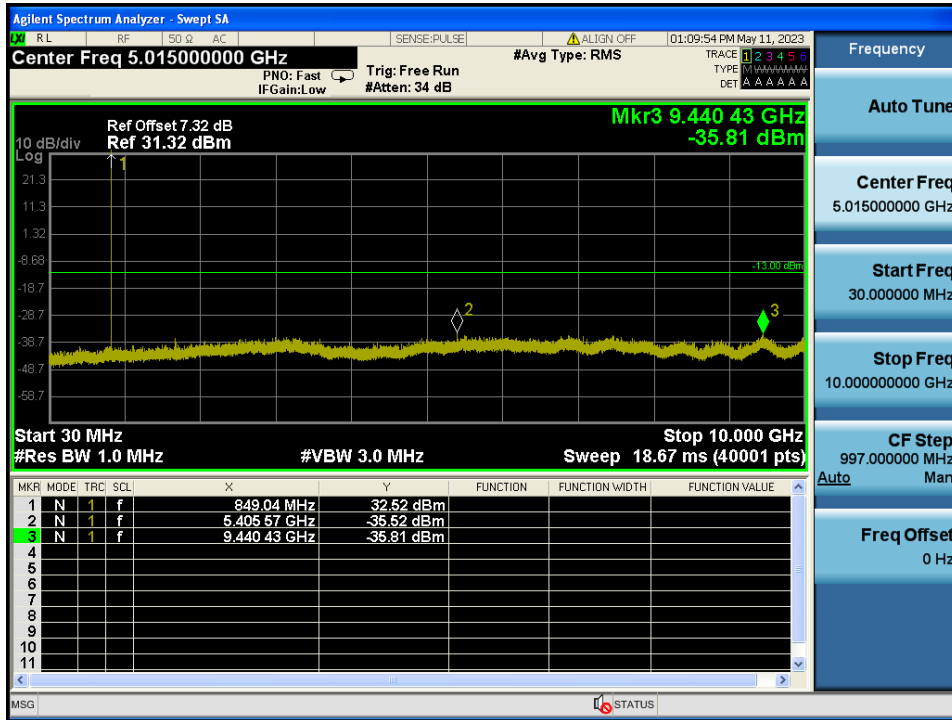


WCDMA850 & Channel: 4 132

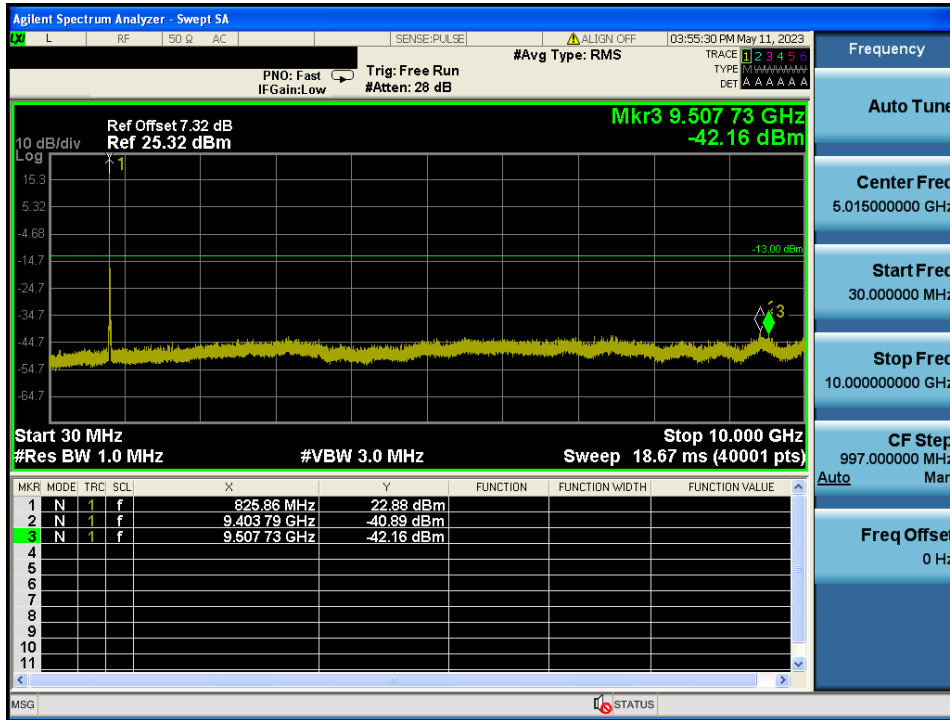

WCDMA850 & Channel: 4 183

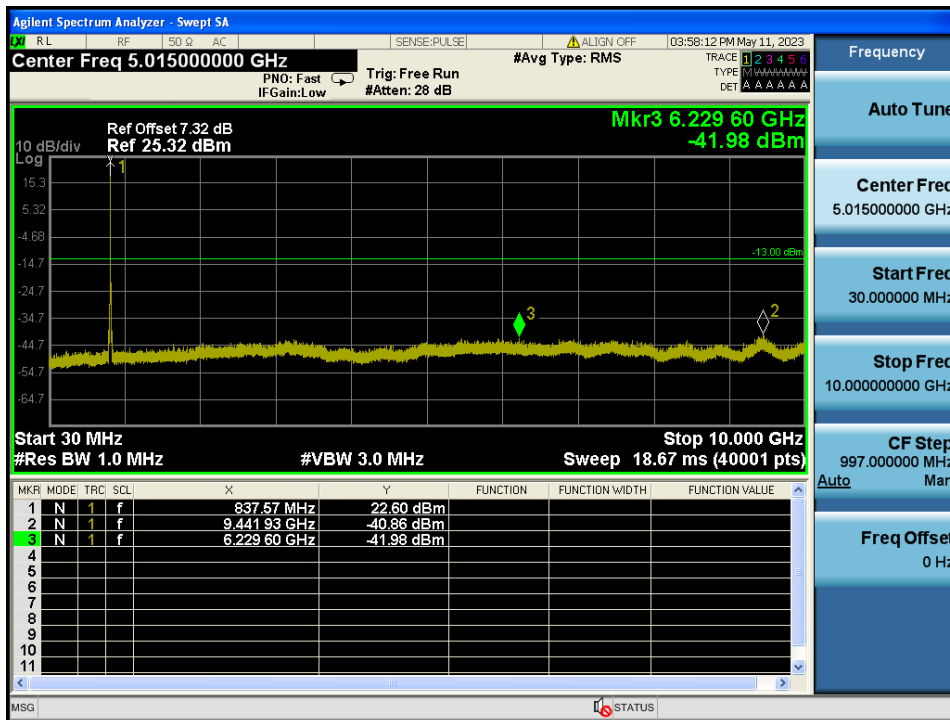


WCDMA850 & Channel: 4 233

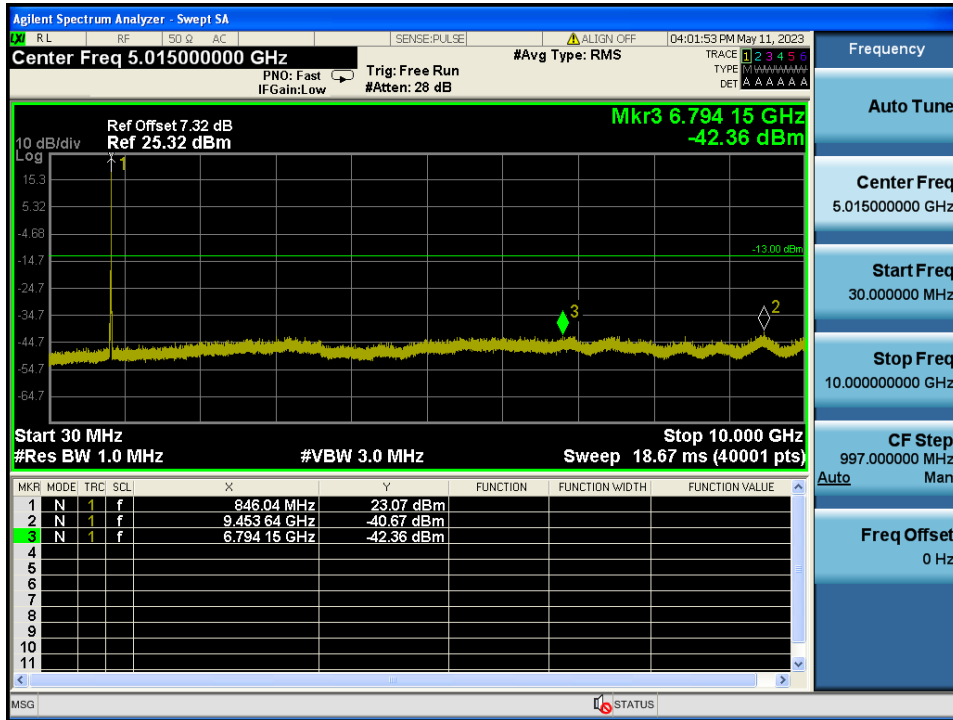





WCDMA1700 & Channel: 1 312

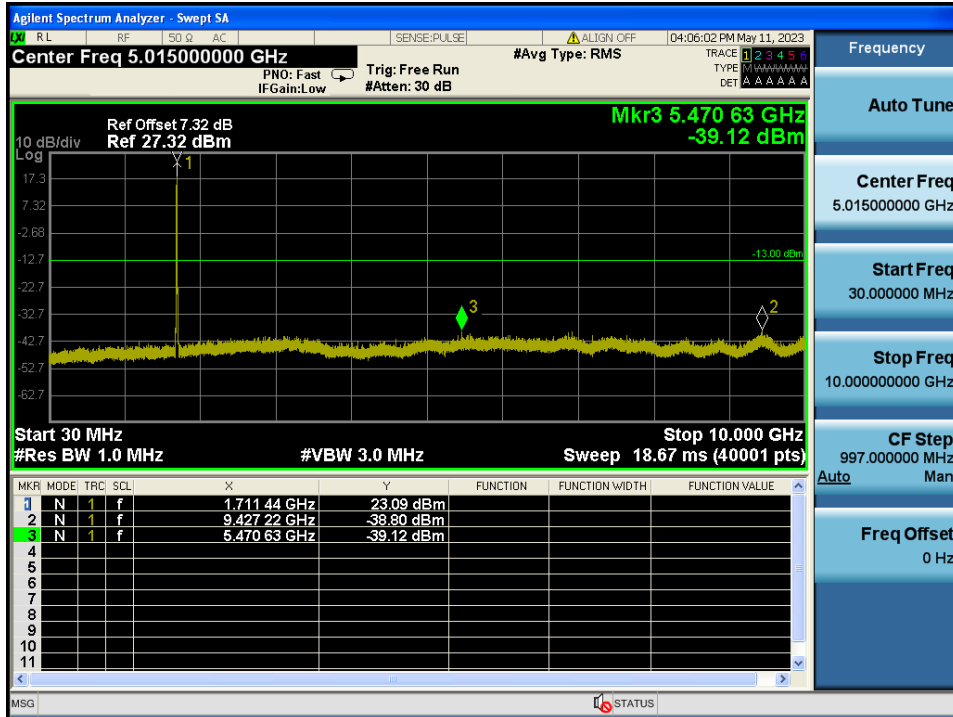


WCDMA1700 & Channel: 1 312

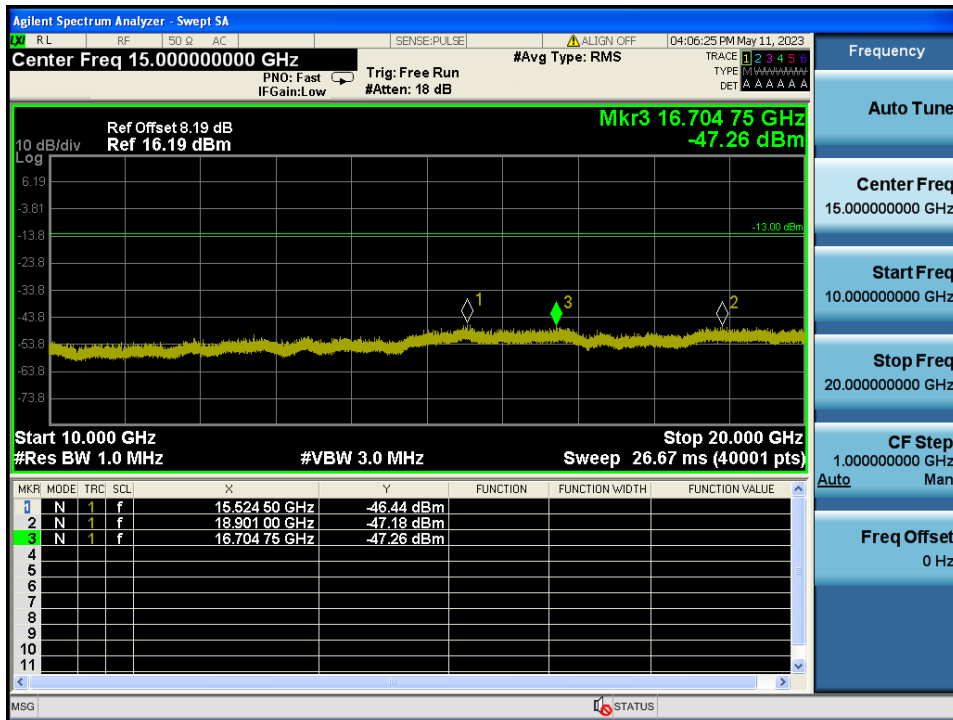


WCDMA1700 & Channel: 1 412

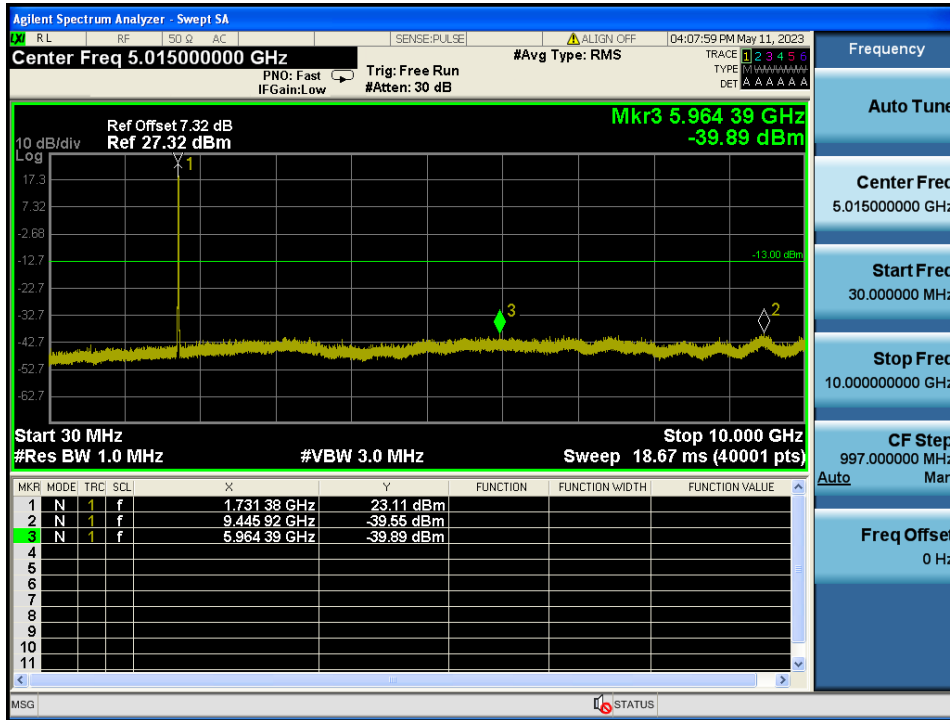


WCDMA1700 & Channel: 1 412

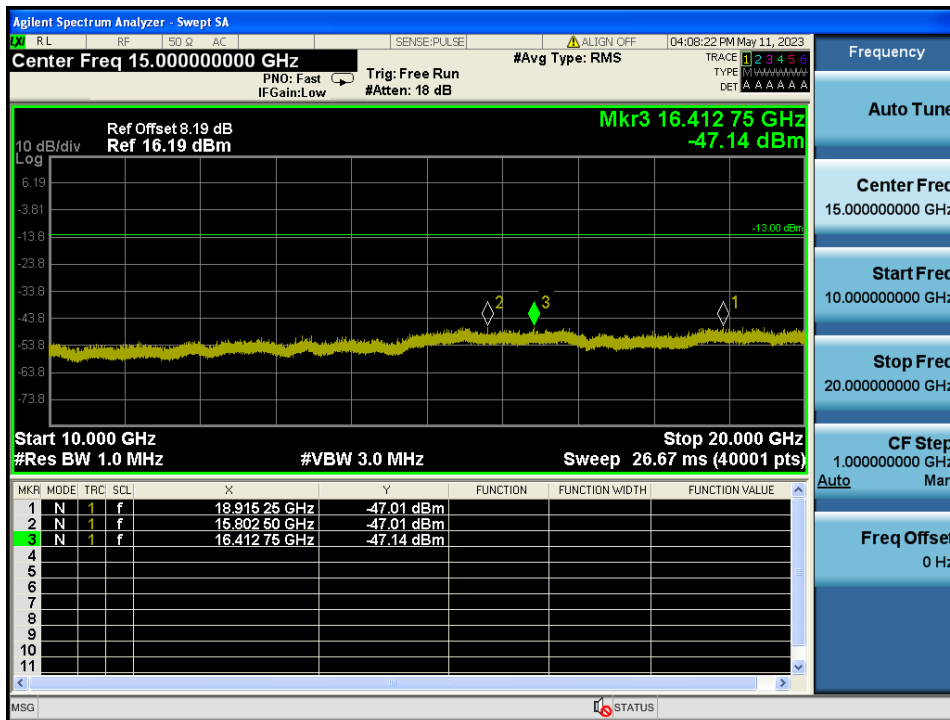


WCDMA1700 & Channel: 1 513

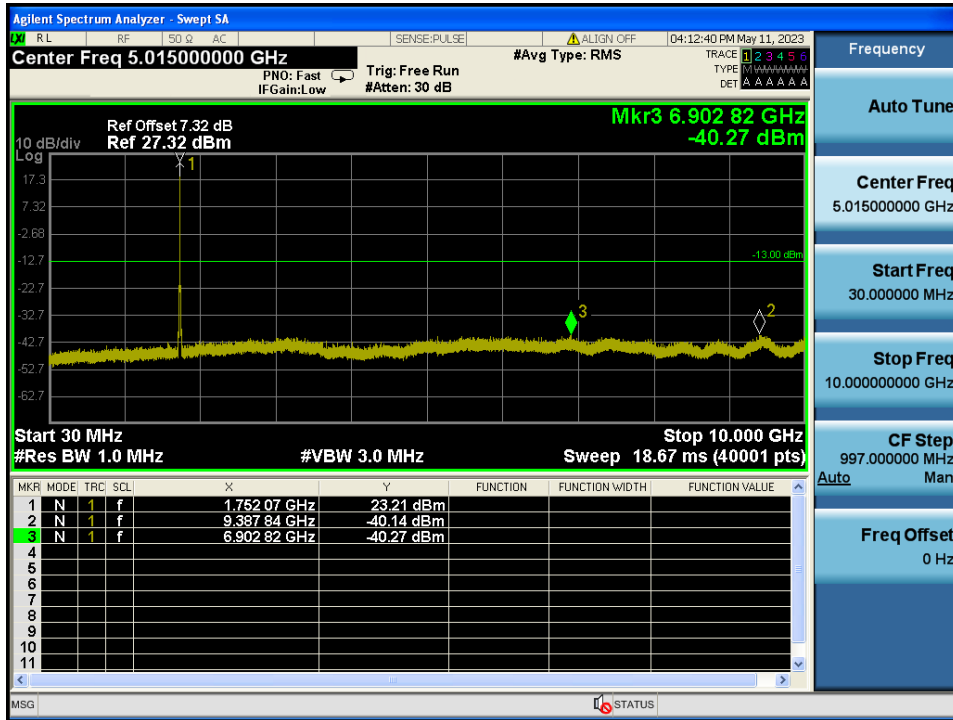


WCDMA1700 & Channel: 1 513

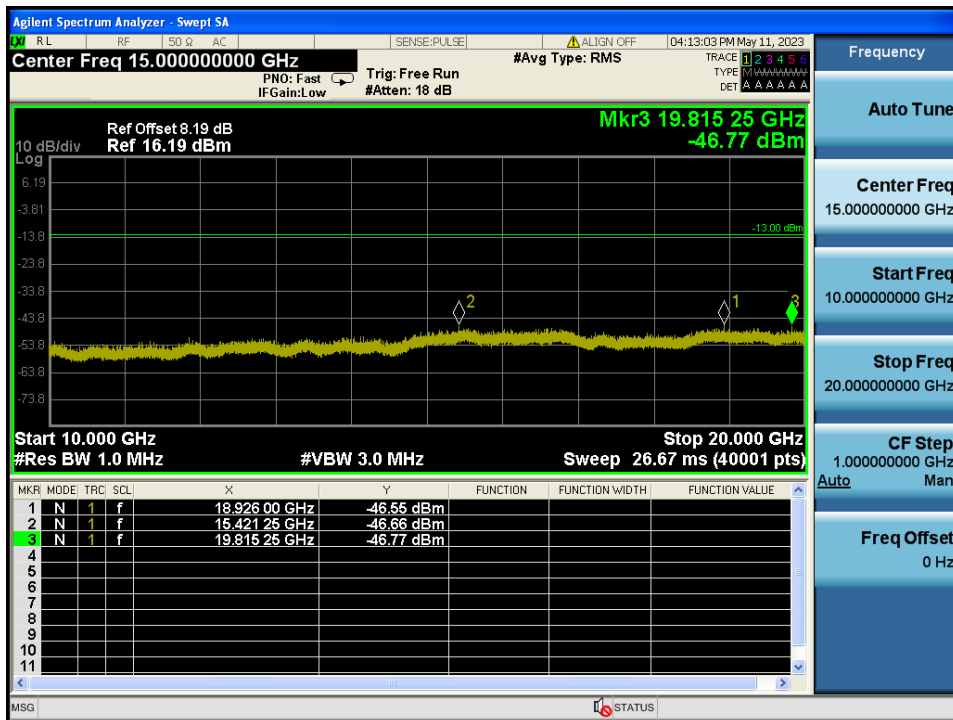


GSM1900 & Channel: 512

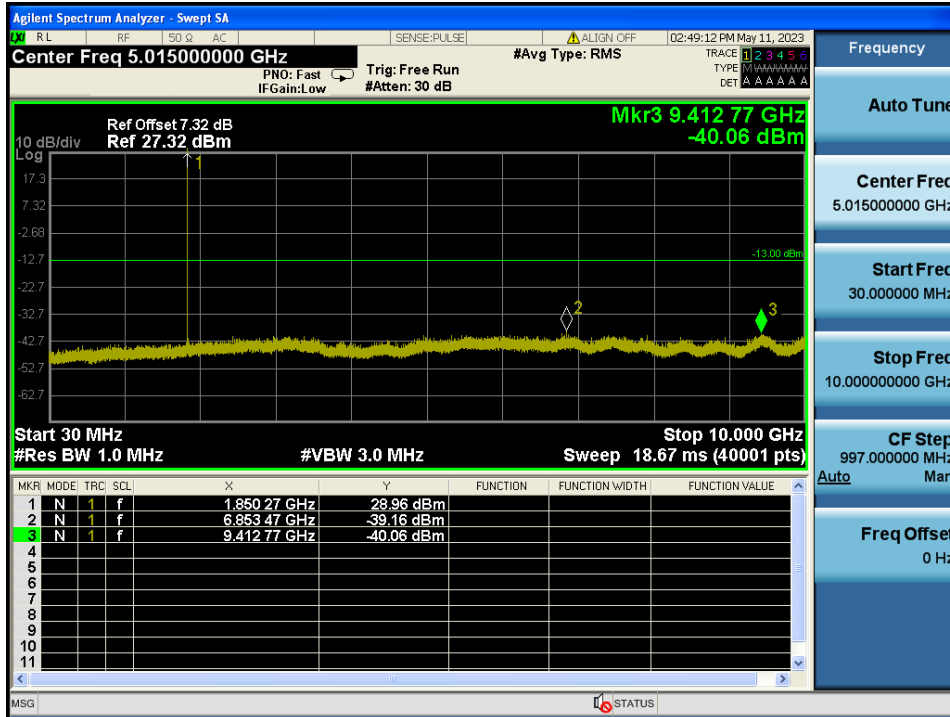


GSM1900 & Channel: 512

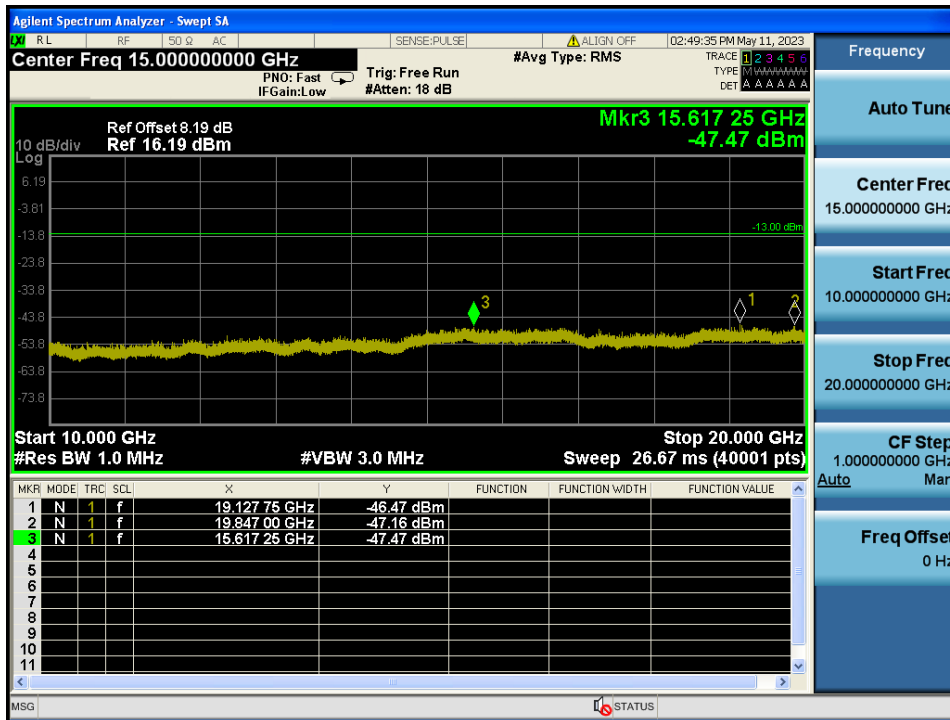


GSM1900 & Channel: 661

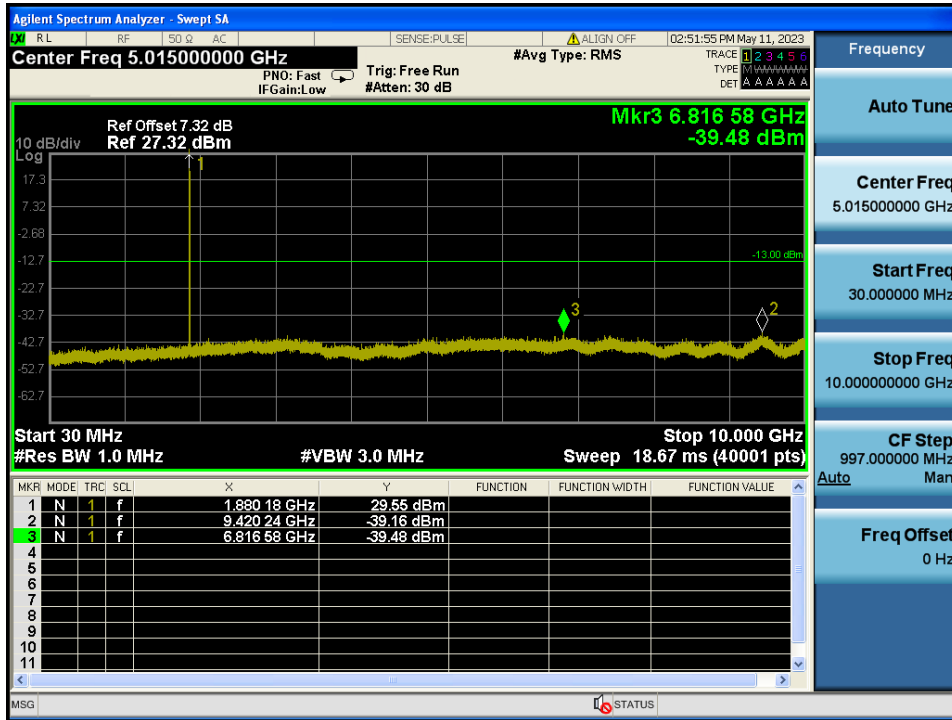


GSM1900 & Channel: 661

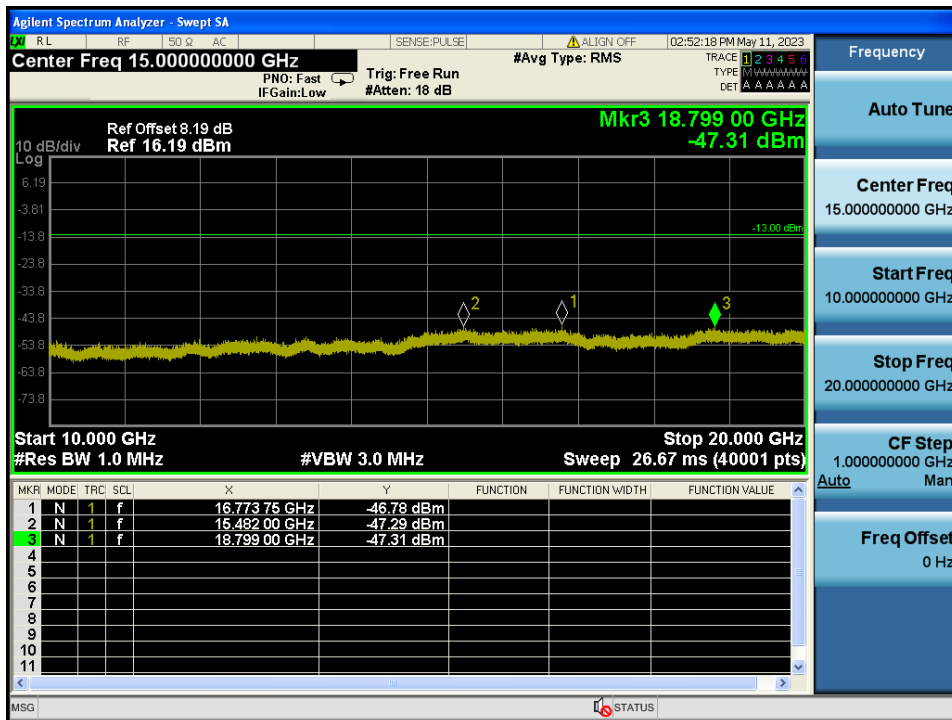


GSM1900 & Channel: 810

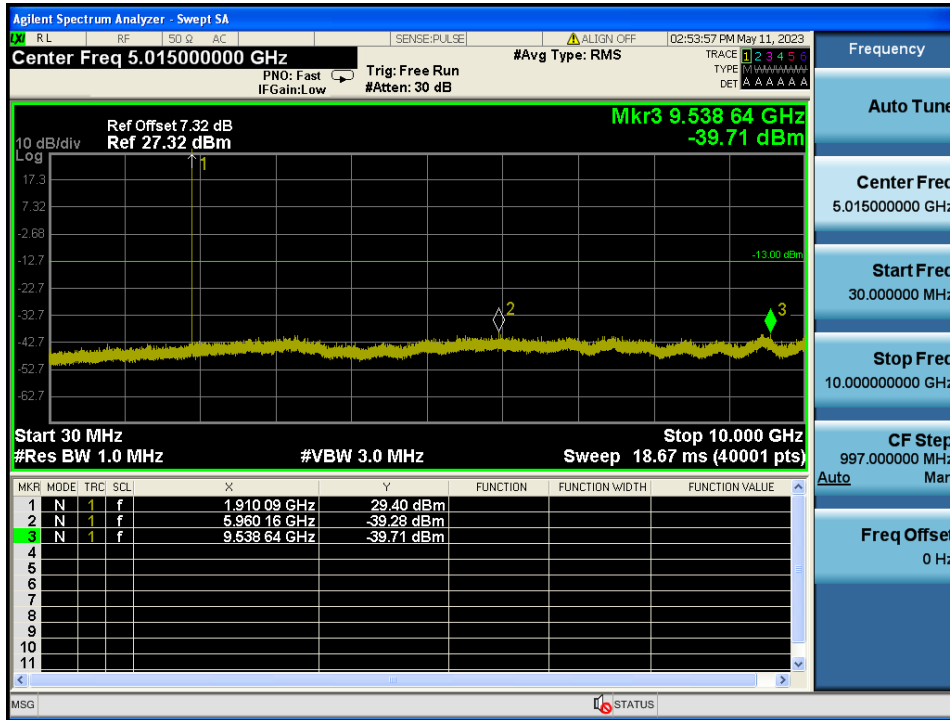


GSM1900 & Channel: 810

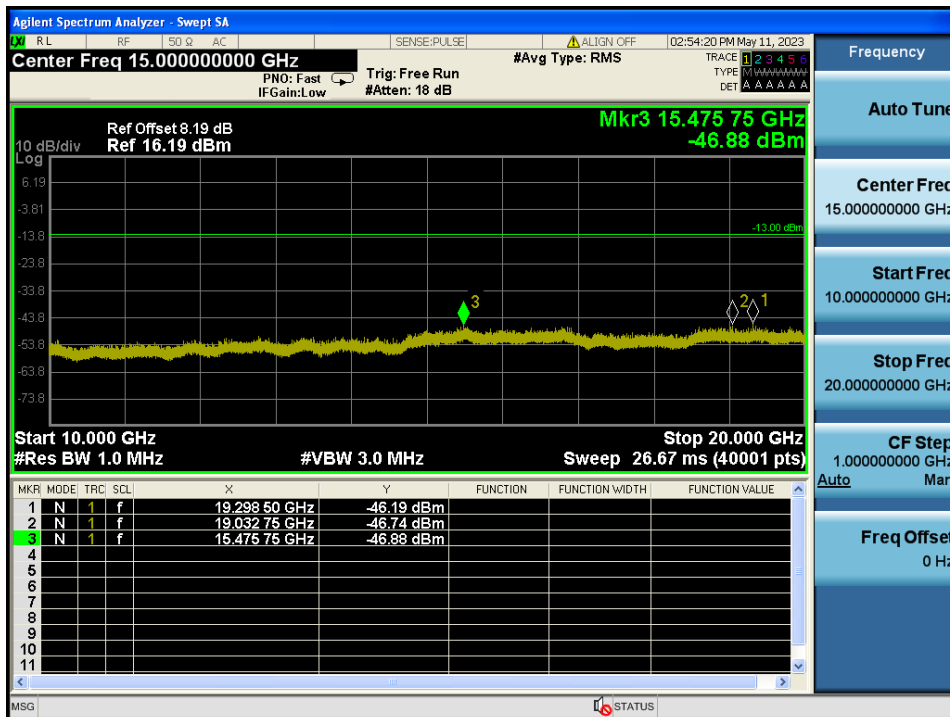


WCDMA1900 & Channel: 9 262

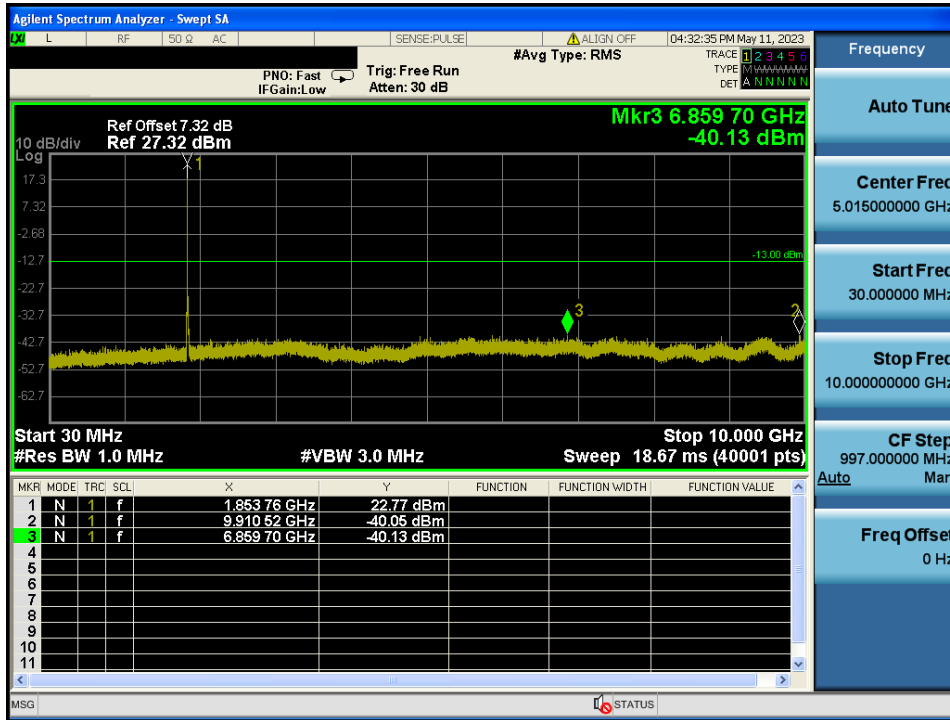


WCDMA1900 & Channel: 9 262

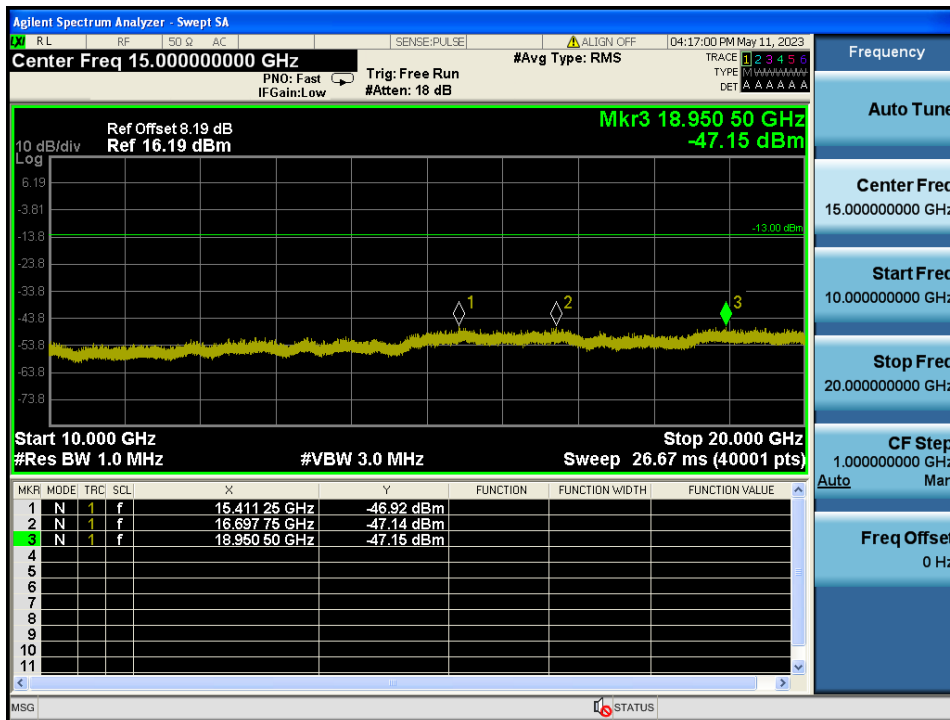

WCDMA1900 & Channel: 9 400

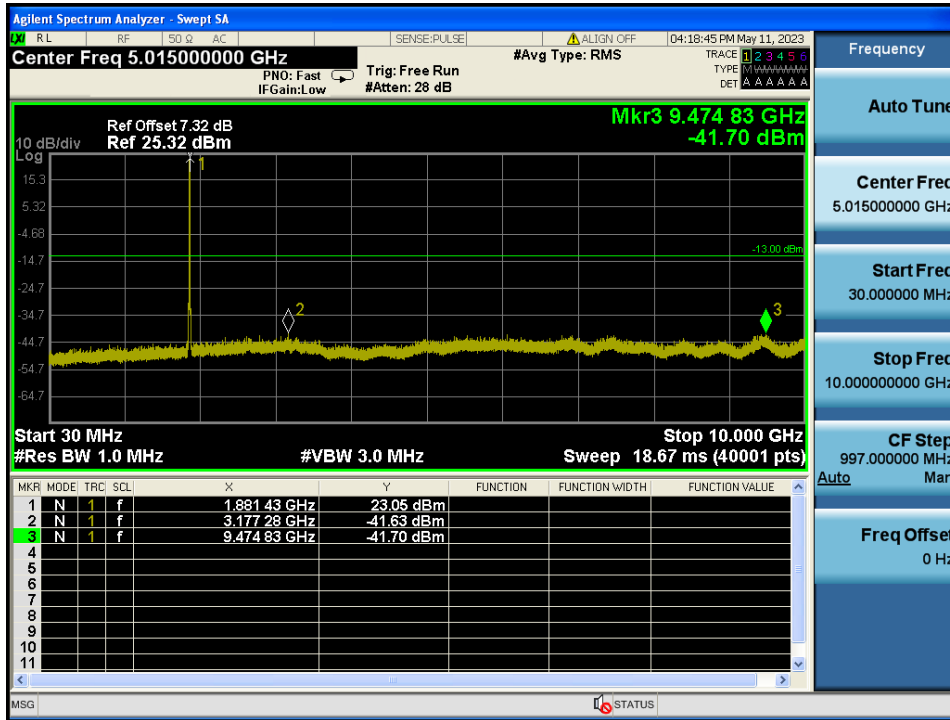


WCDMA1900 & Channel: 9 400

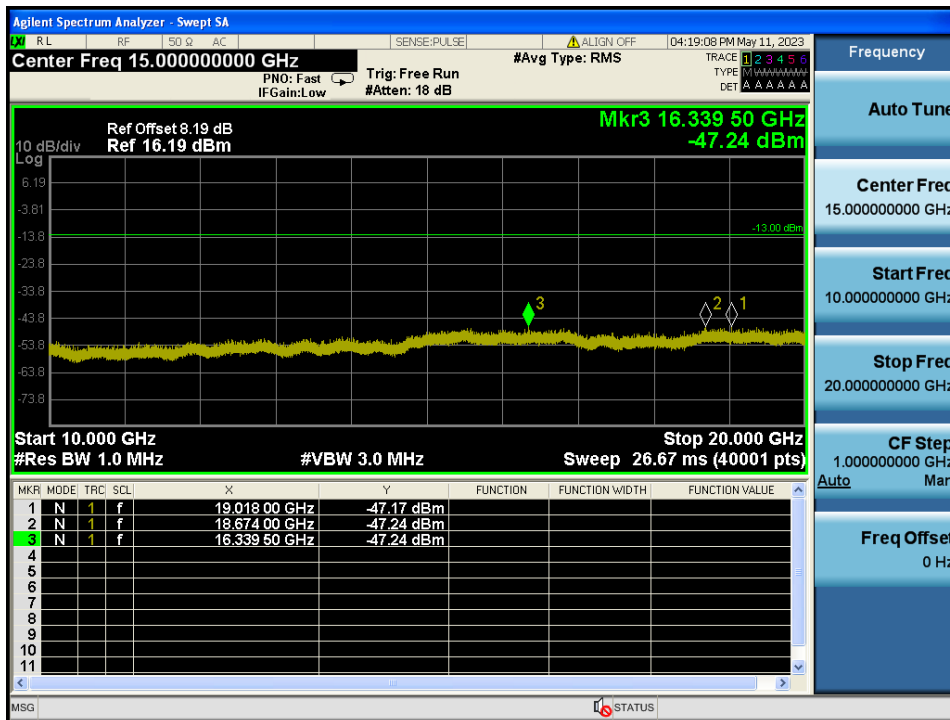




WCDMA1900 & Channel: 9 538

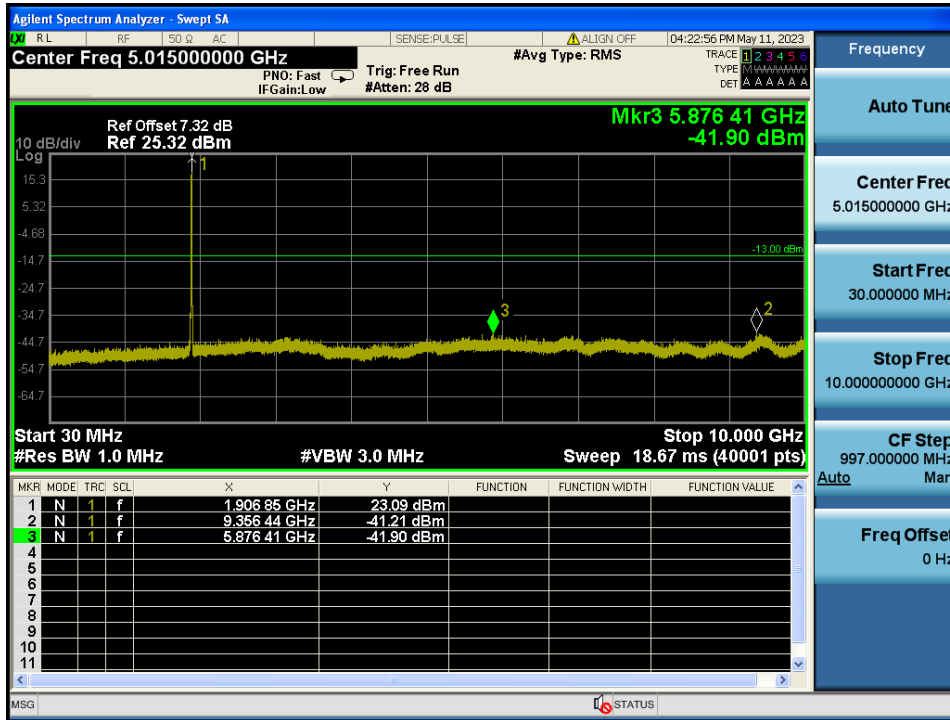


WCDMA1900 & Channel: 9 538

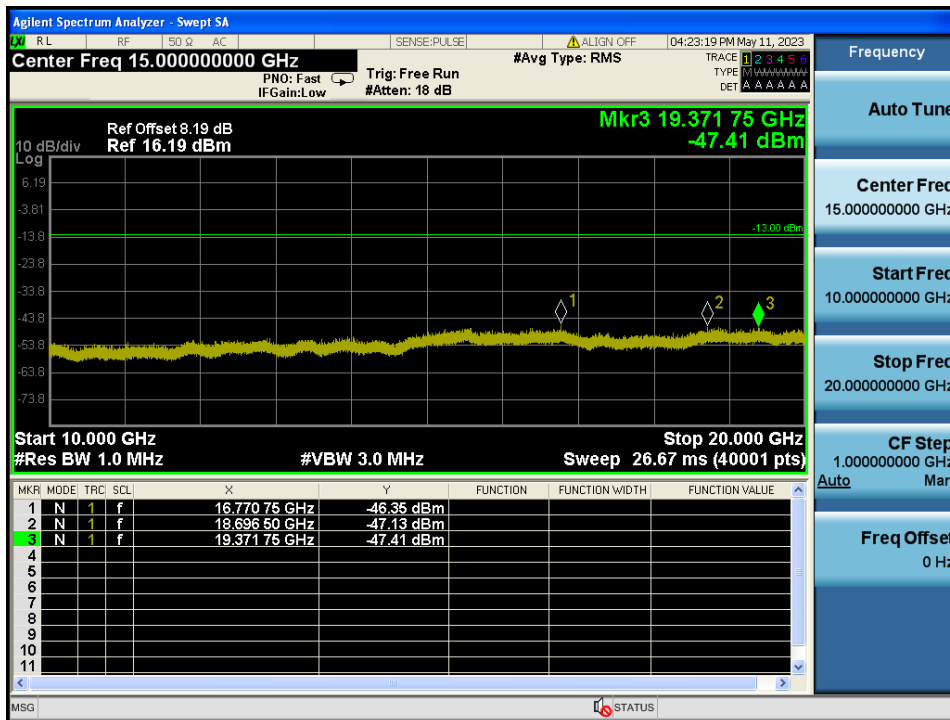


8.4. BAND EDGE EMISSIONS AT ANTENNA TERMINAL


GSM850 & Channel: 128

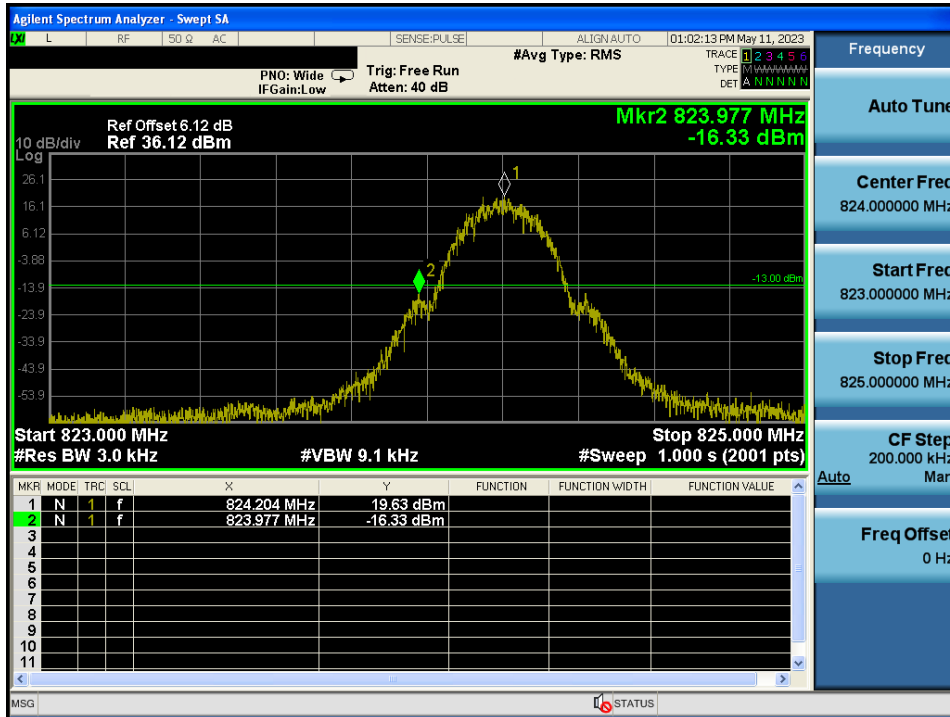


GSM850 & Channel: 128

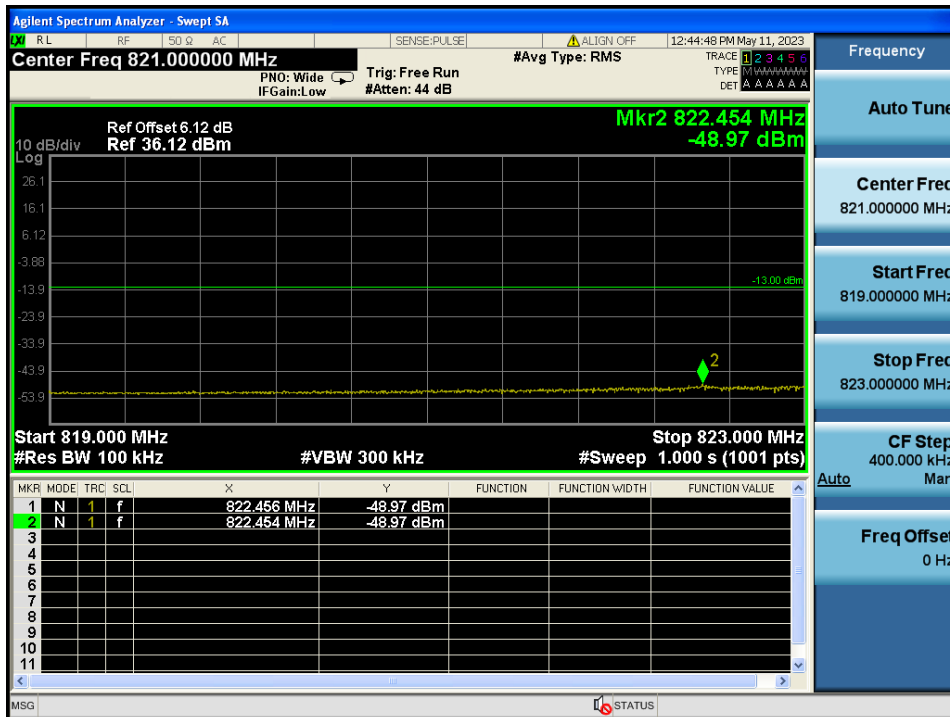


GSM850 & Channel: 251

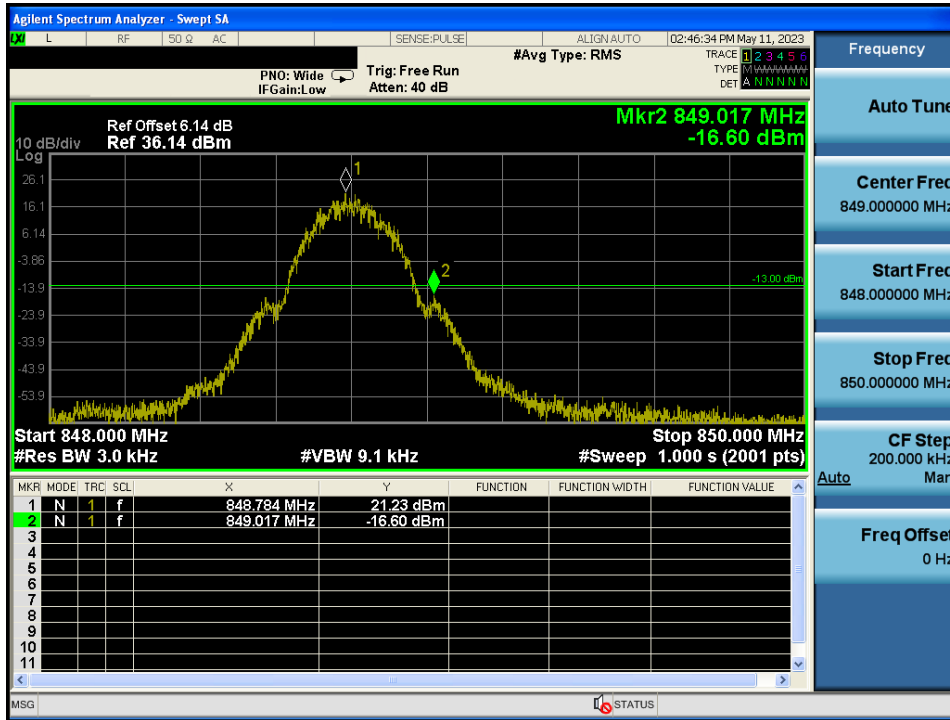


GSM850 & Channel: 251

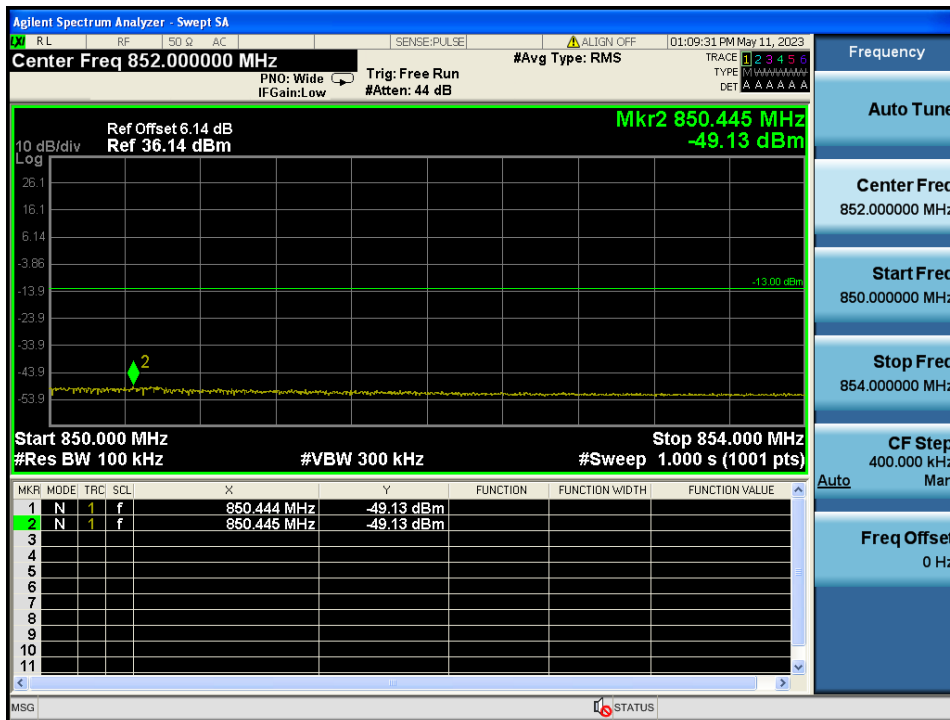


EDGE850 & Channel: 128

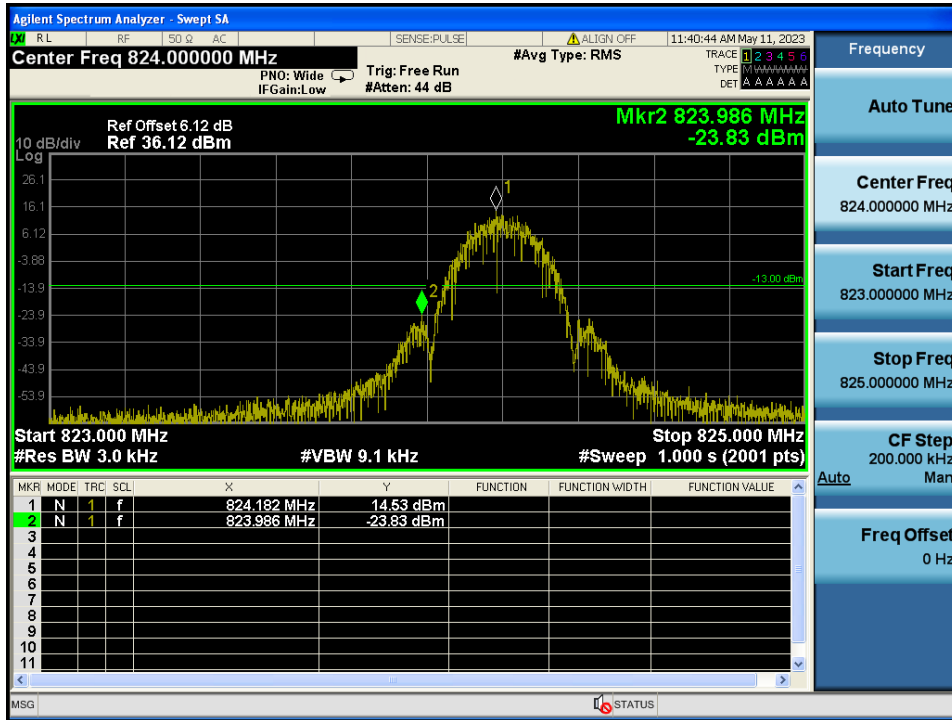


EDGE850 & Channel: 128

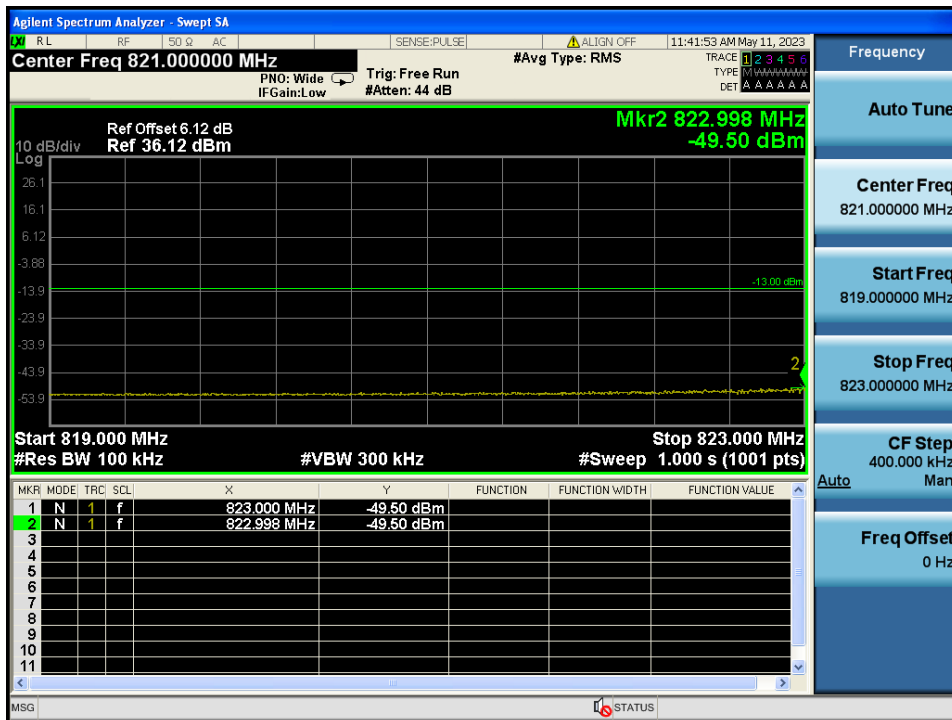

EDGE850 & Channel: 251

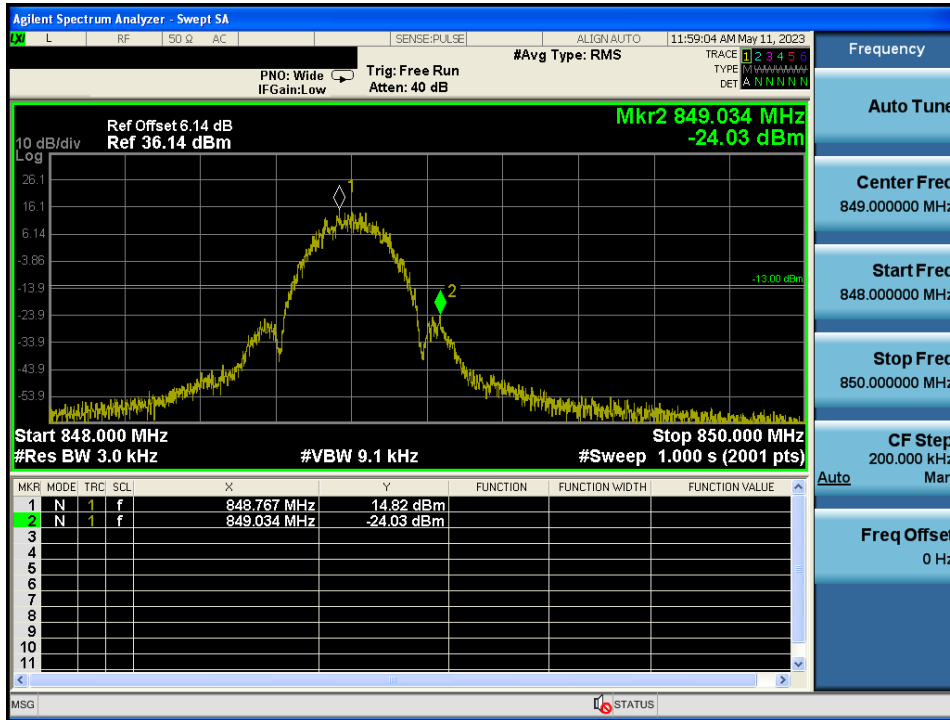


EDGE850 & Channel: 251

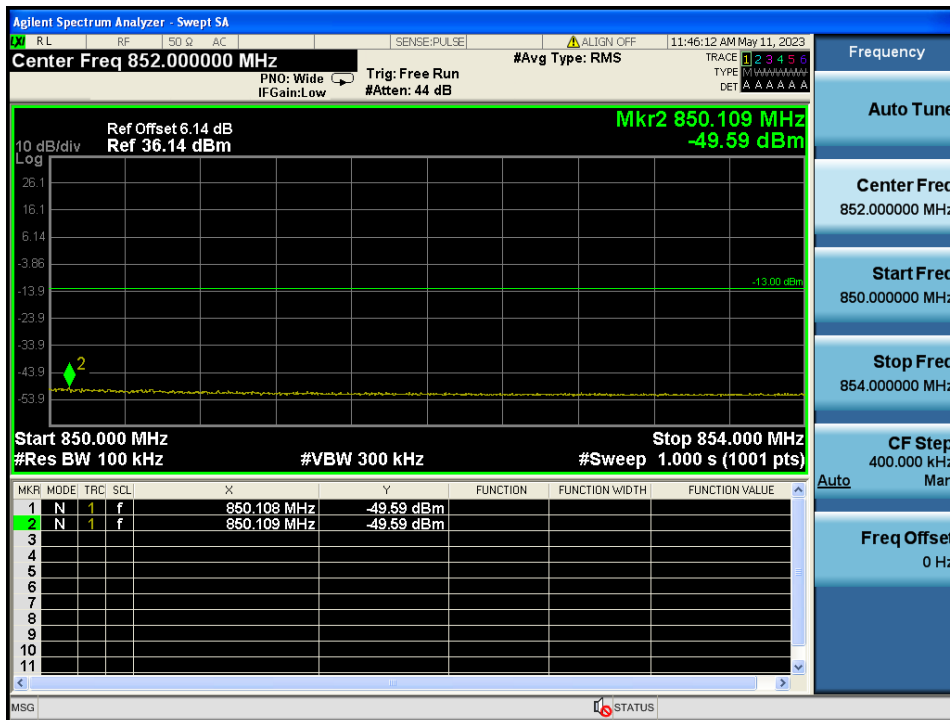

WCDMA850 & Channel: 4 132




WCDMA850 & Channel: 4 132

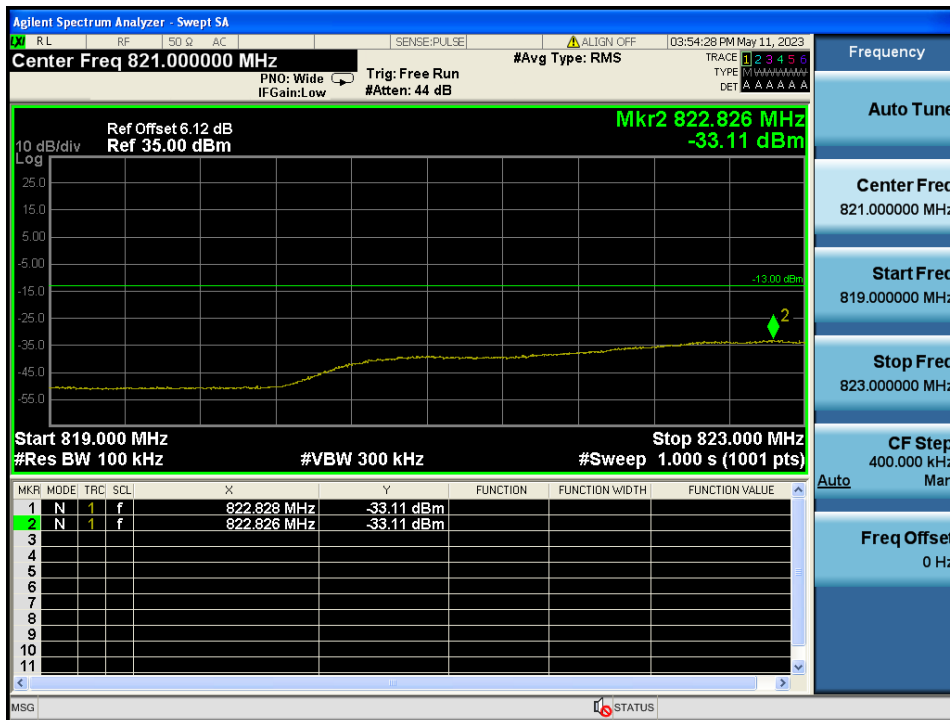


WCDMA850 & Channel: 4 233




WCDMA850 & Channel: 4 233

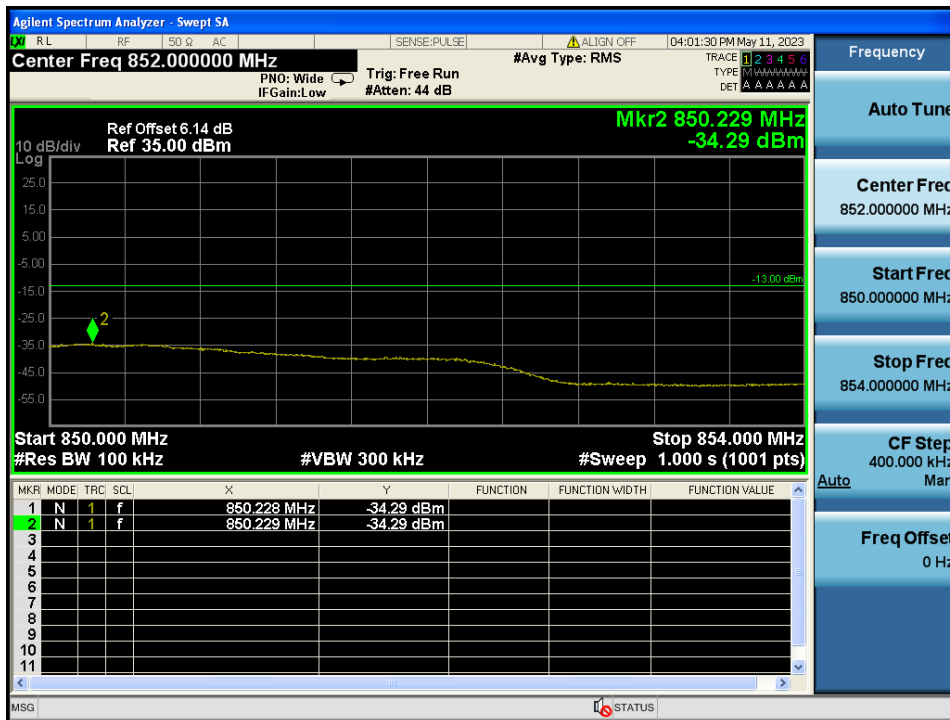

WCDMA1700 & Channel: 1 312

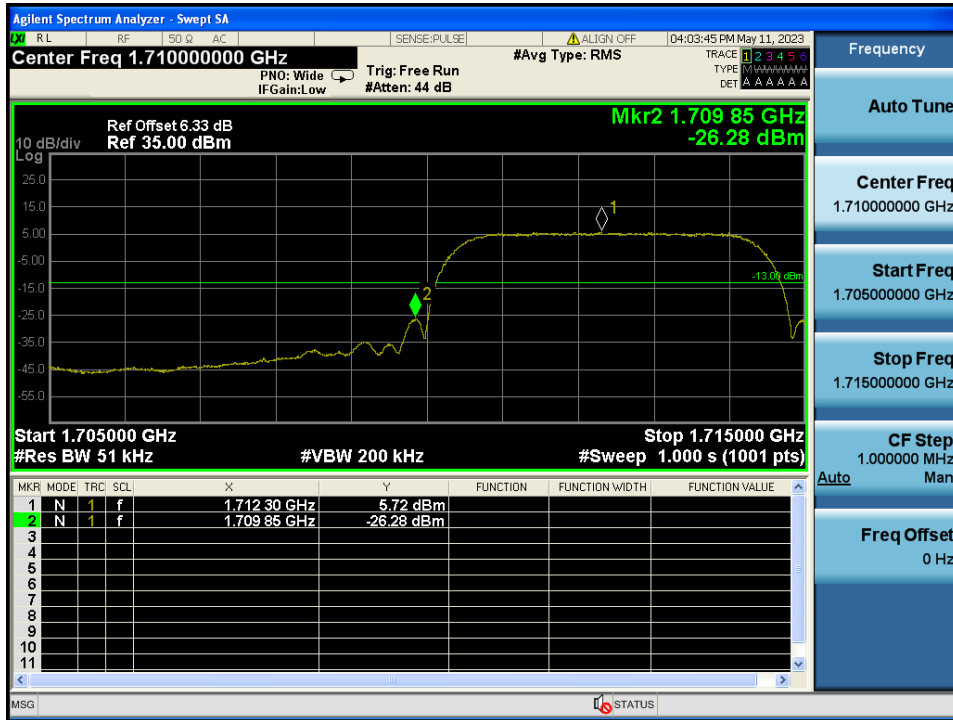

WCDMA1700 & Channel: 1 312

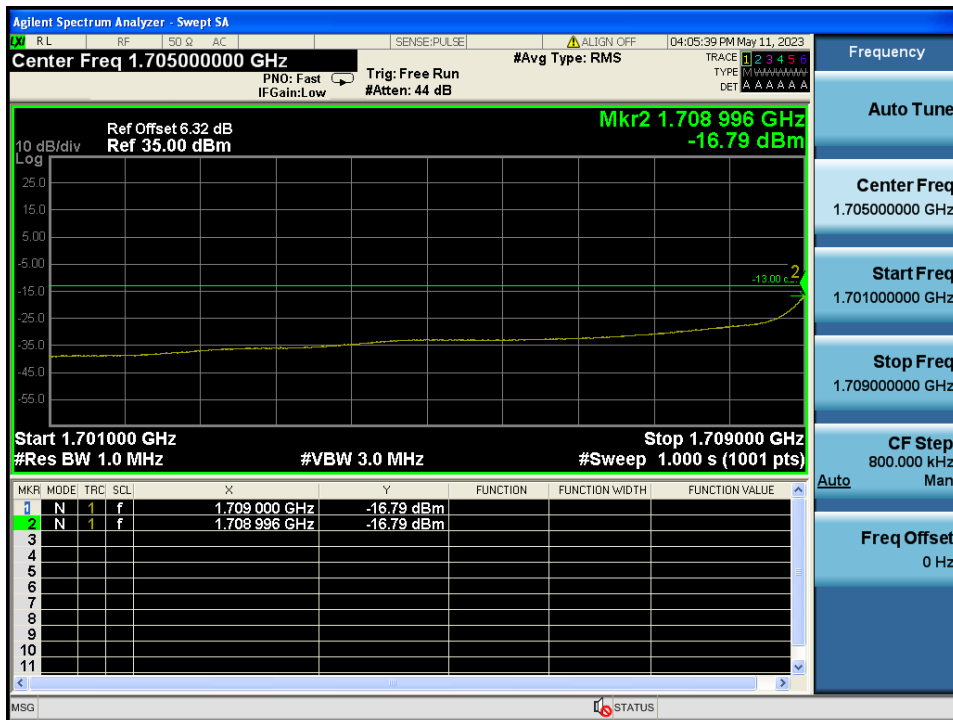





WCDMA1700 & Channel: 1 513




WCDMA1700 & Channel: 1 513

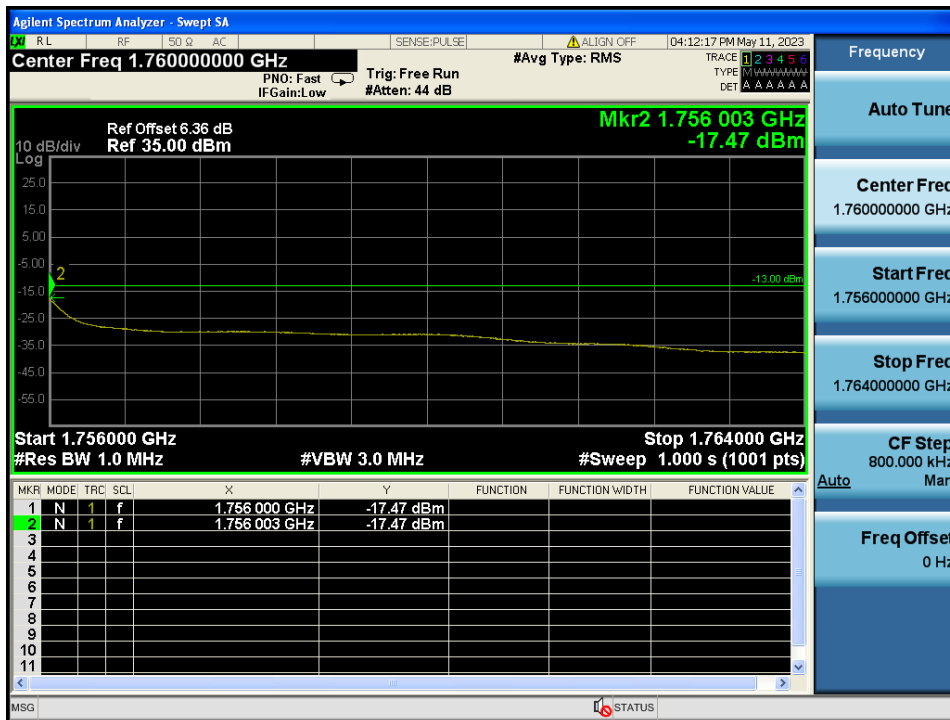


GSM1900 & Channel: 512

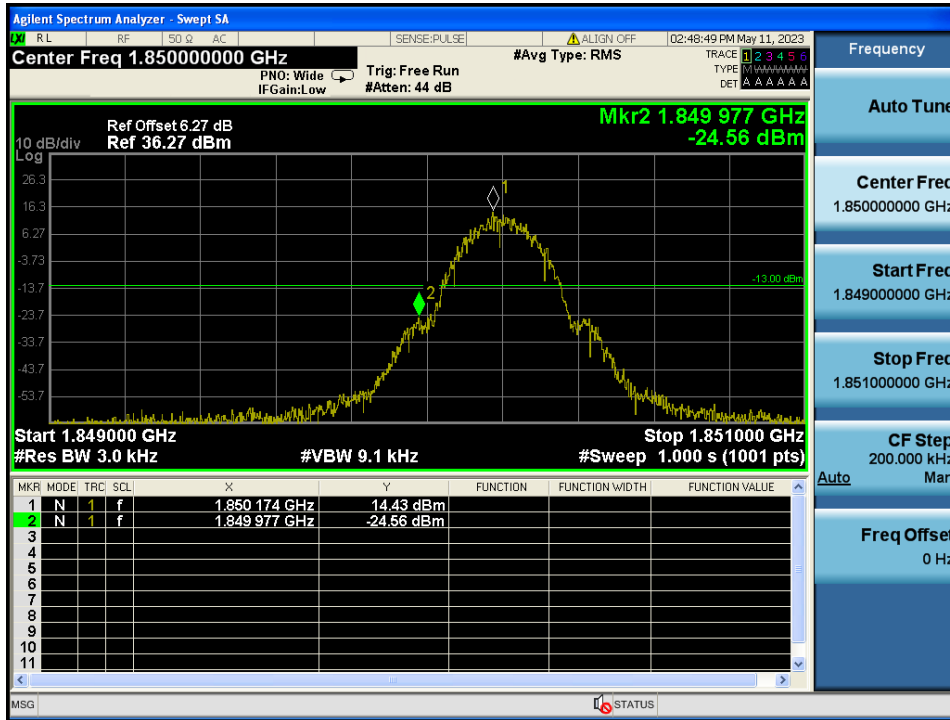


GSM1900 & Channel: 512

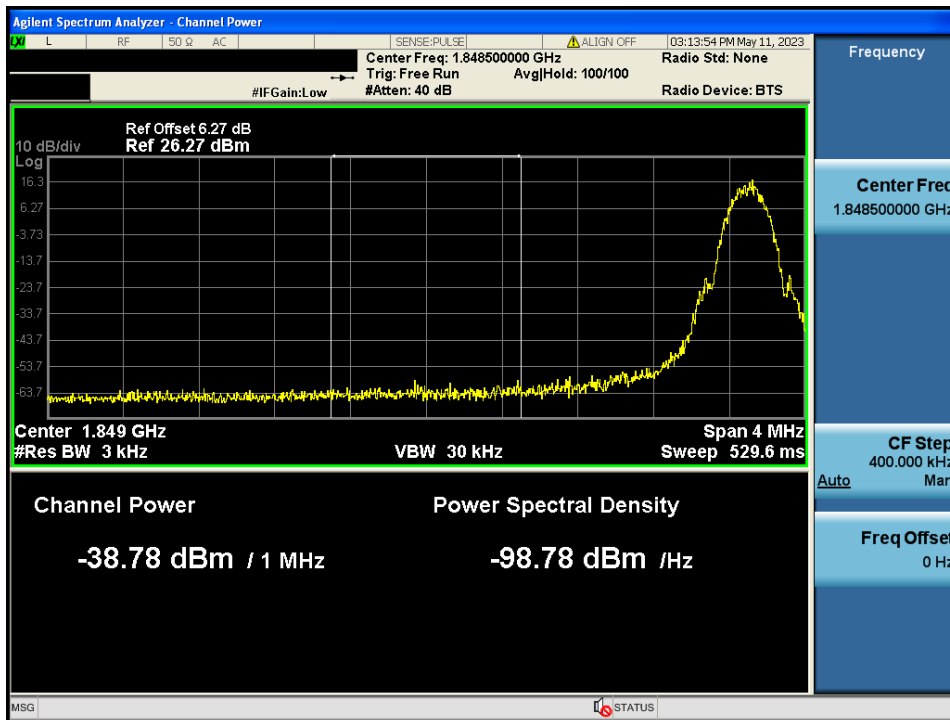


GSM1900 & Channel: 810

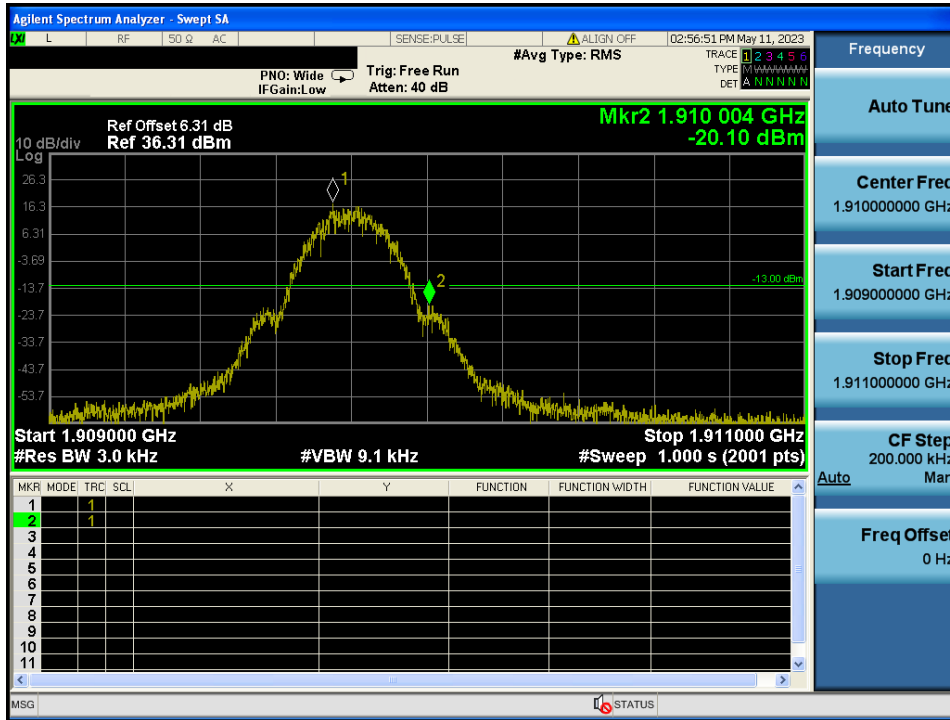


GSM1900 & Channel: 810

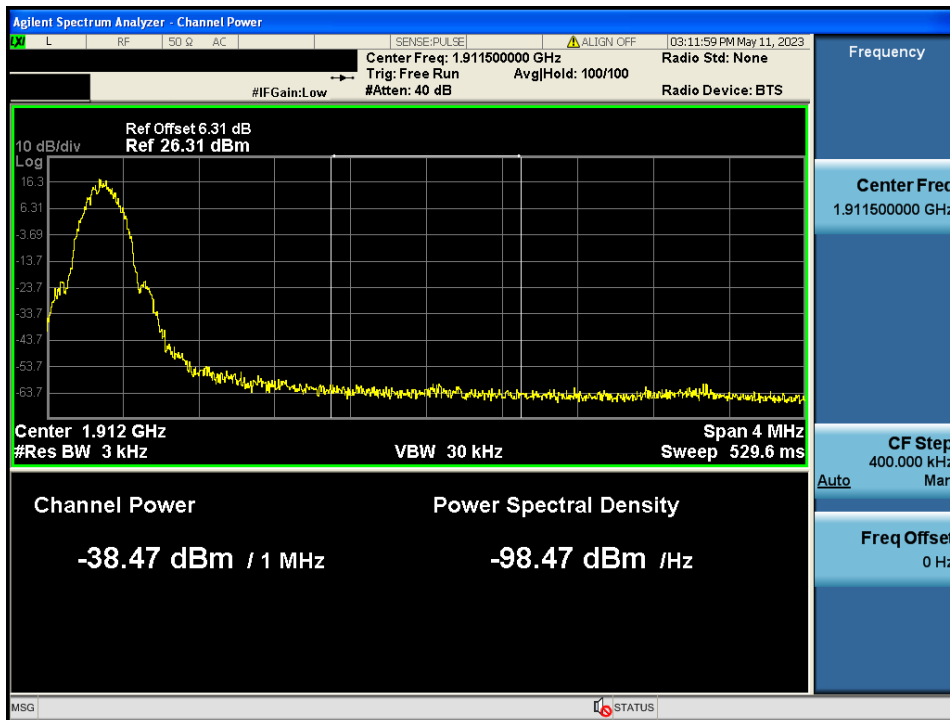


EDGE1900 & Channel: 512

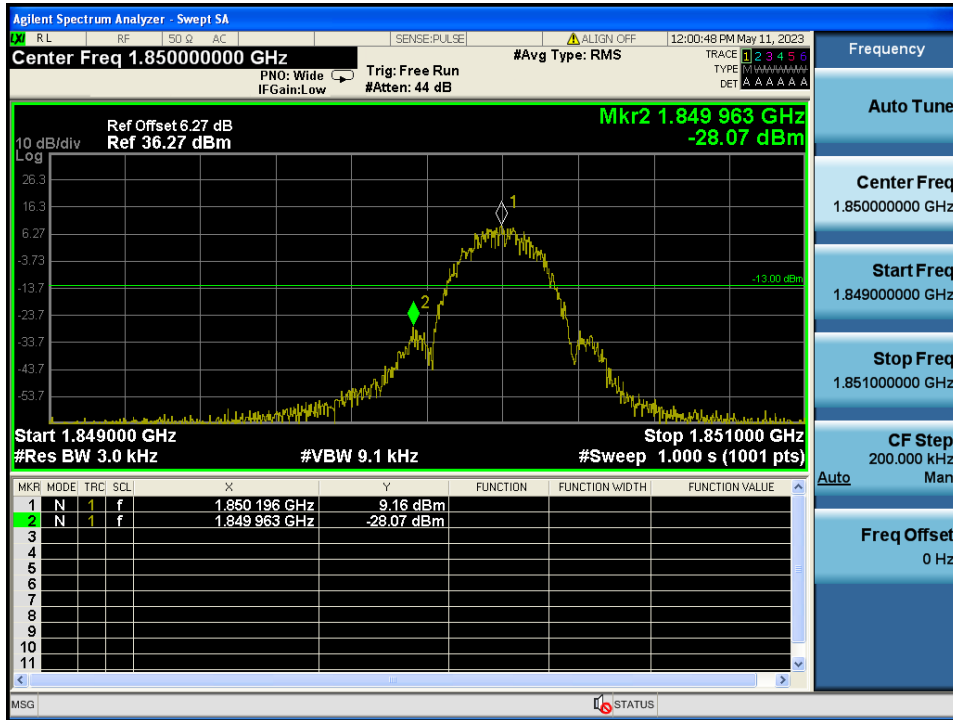


EDGE1900 & Channel: 512

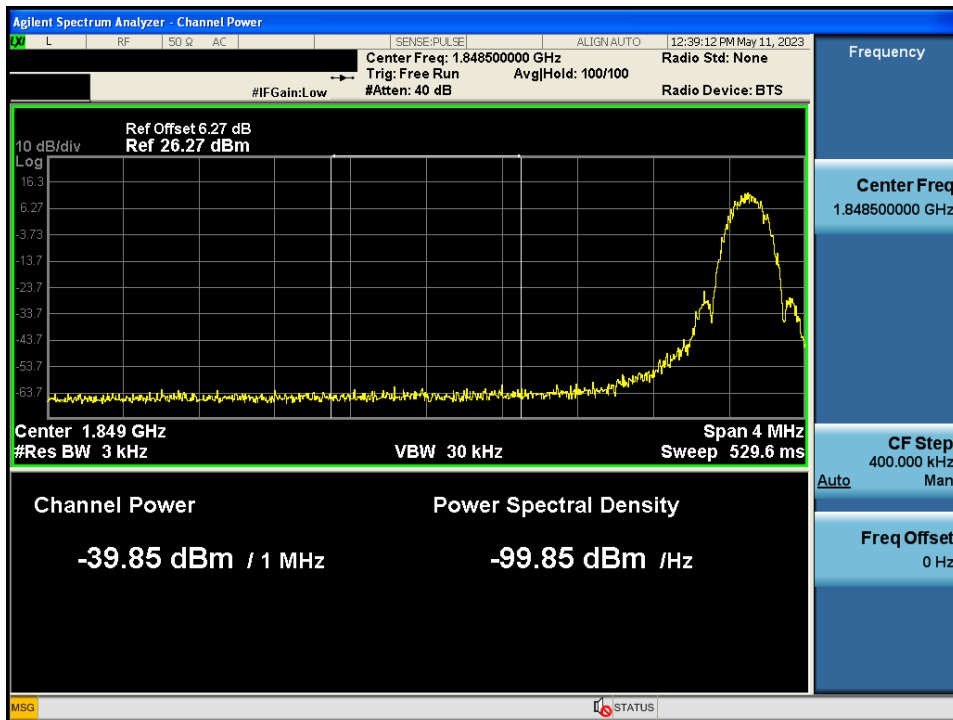

EDGE1900 & Channel: 810

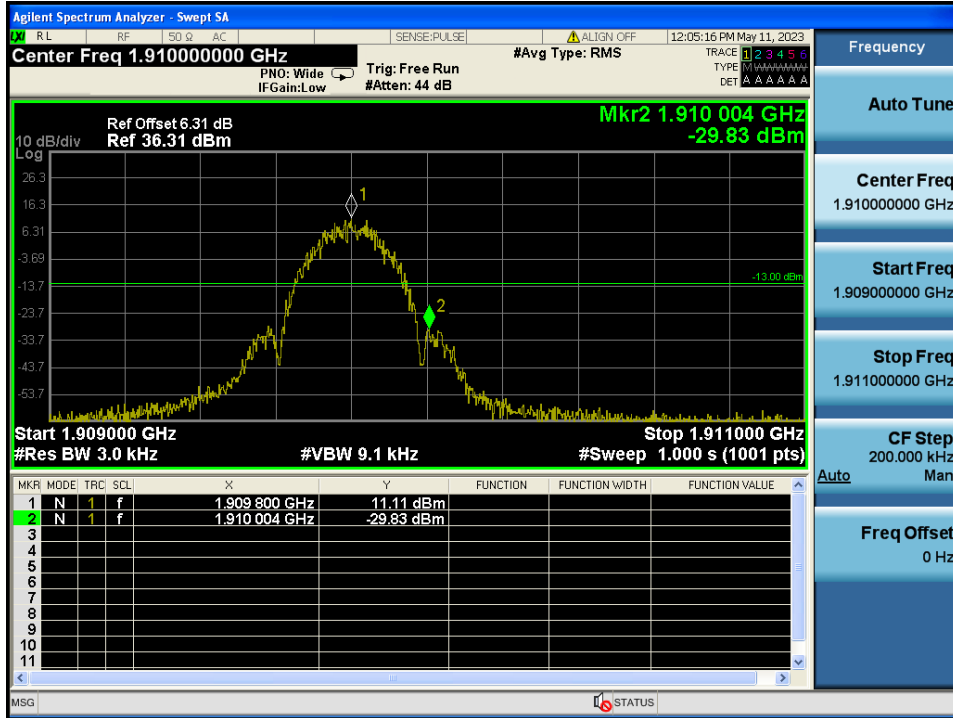


EDGE1900 & Channel: 810

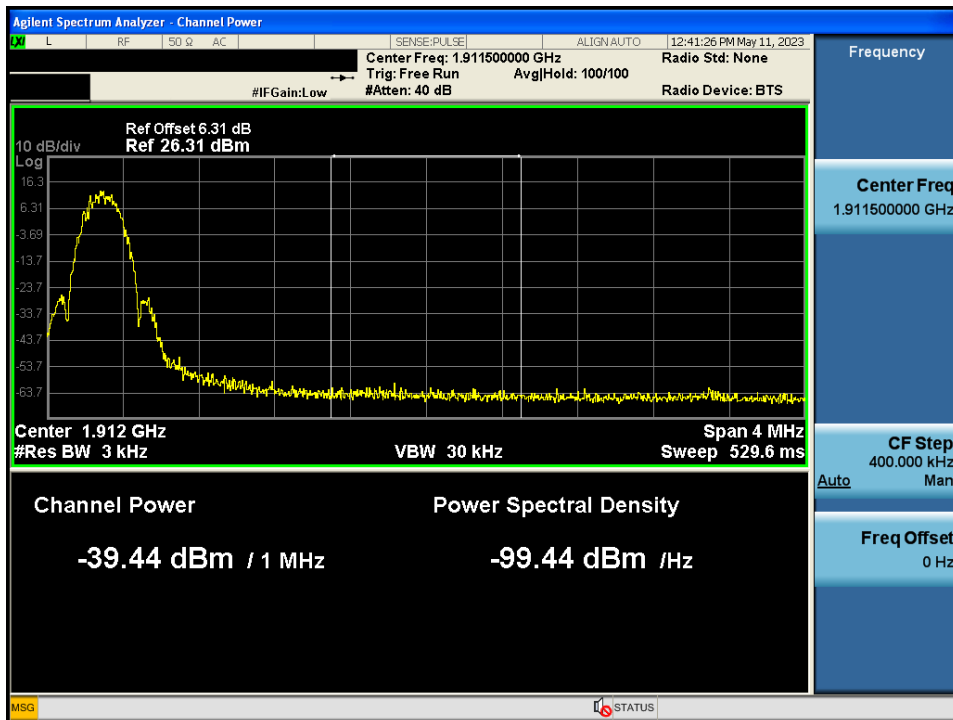


WCDMA1900 & Channel: 9 262



WCDMA1900 & Channel: 9 262

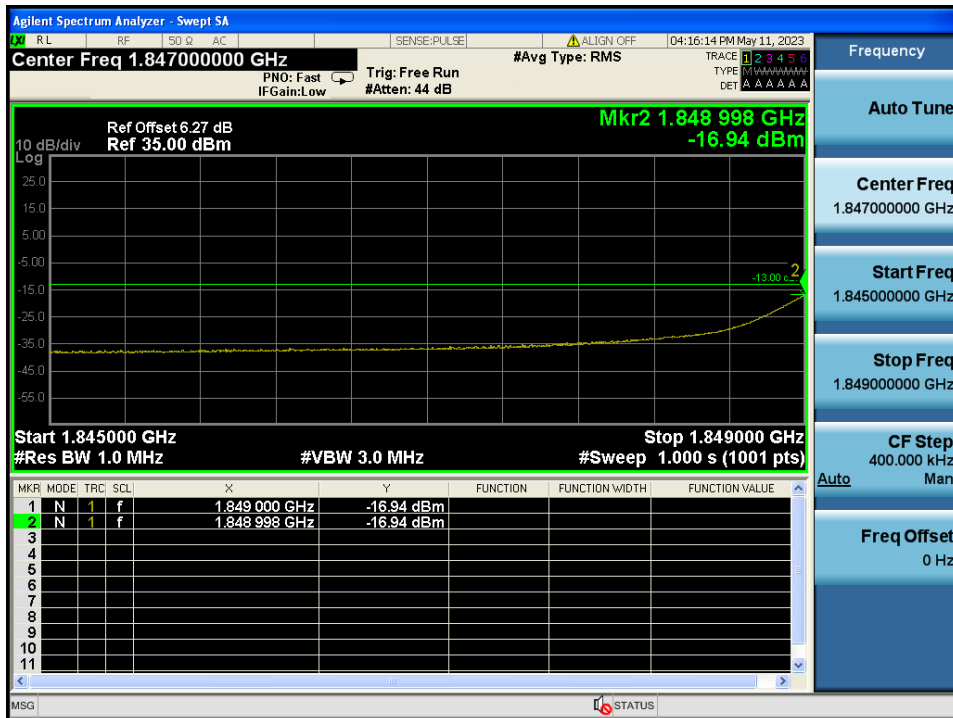

WCDMA1900 & Channel: 9 538

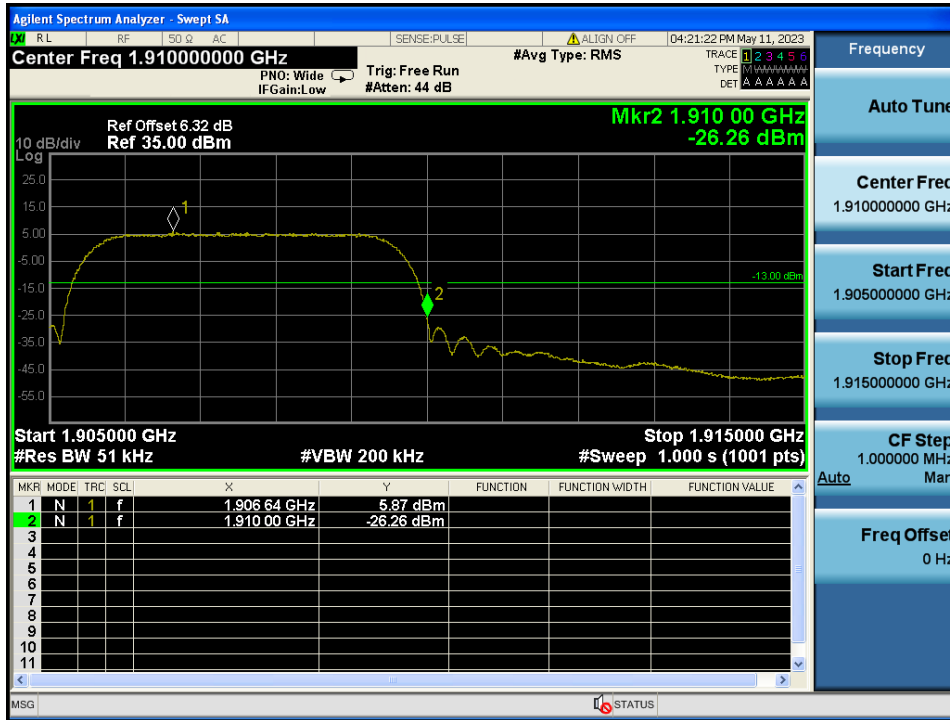

WCDMA1900 & Channel: 9 538

