


LTE band 13 (5 MHz – QPSK)
 Low Channel



Middle Channel



High Channel

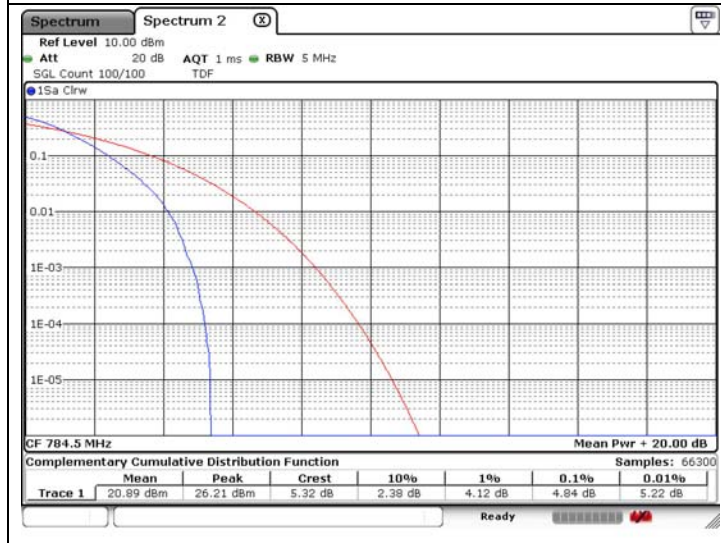


LTE band 13 (10 MHz – QPSK)
 Middle Channel




LTE band 25/2 (1.4 MHz – QPSK)


Low Channel

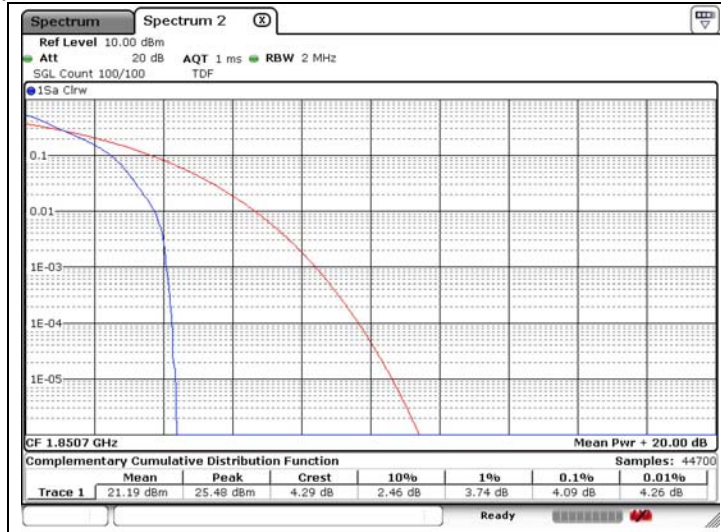

Middle Channel

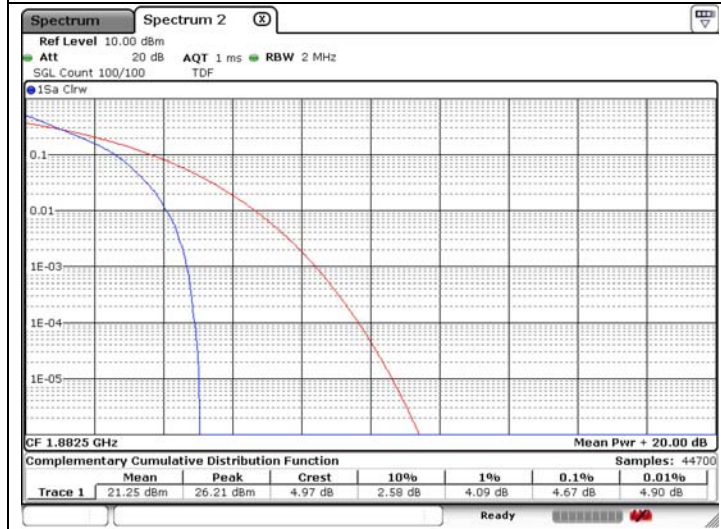


High Channel

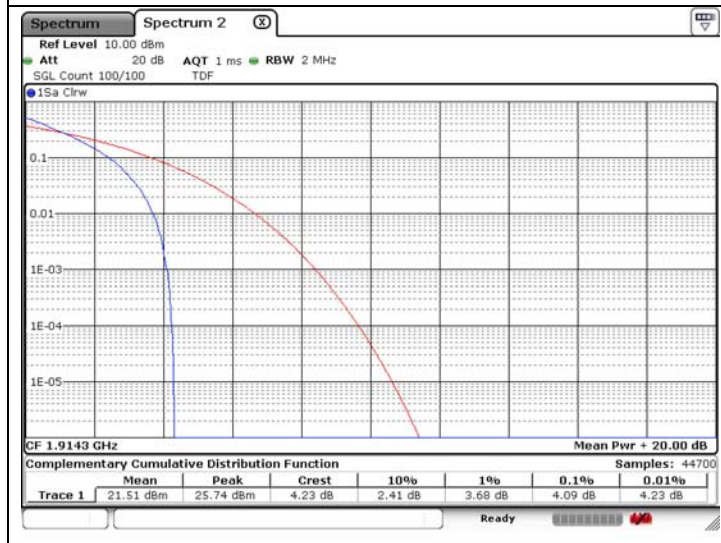


LTE band 25/2 (3 MHz – QPSK)


Low Channel

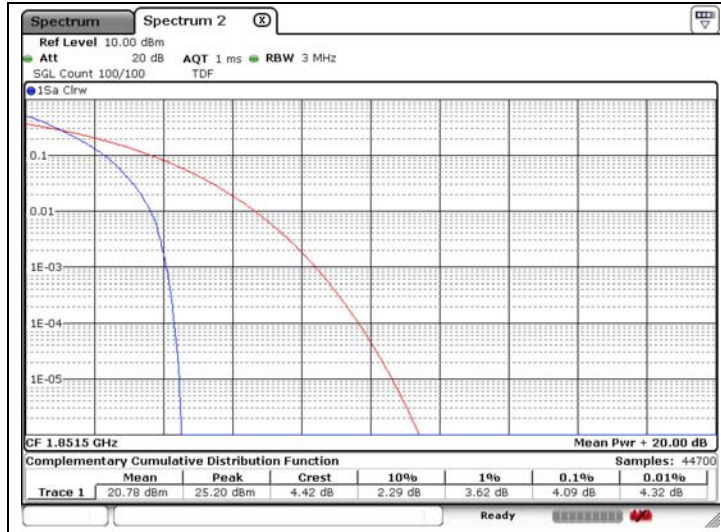

Middle Channel

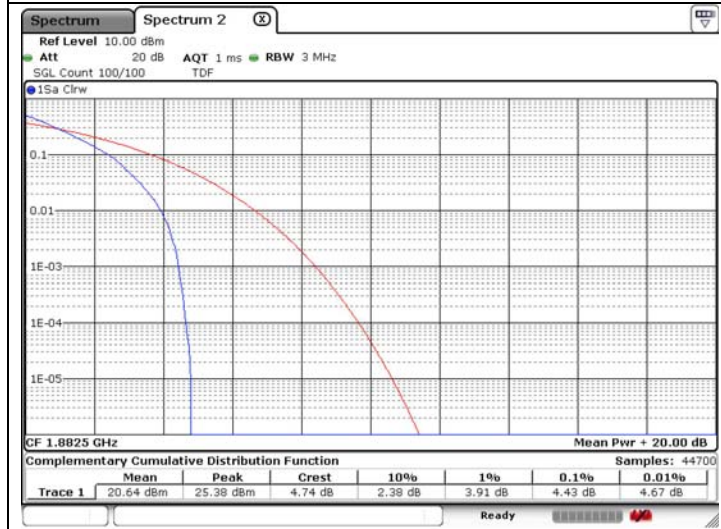


High Channel

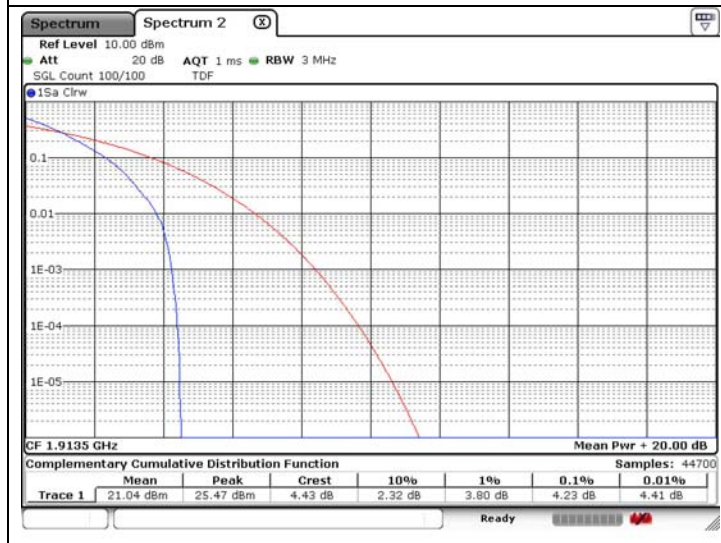


LTE band 25/2 (5 MHz – QPSK)


Low Channel

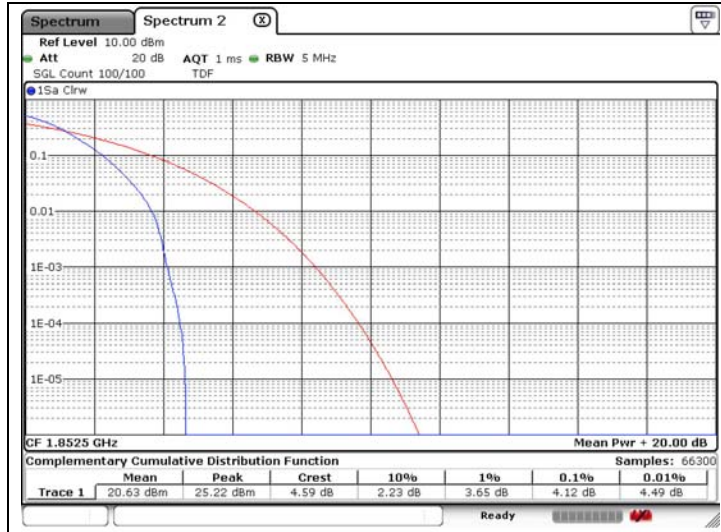

Middle Channel

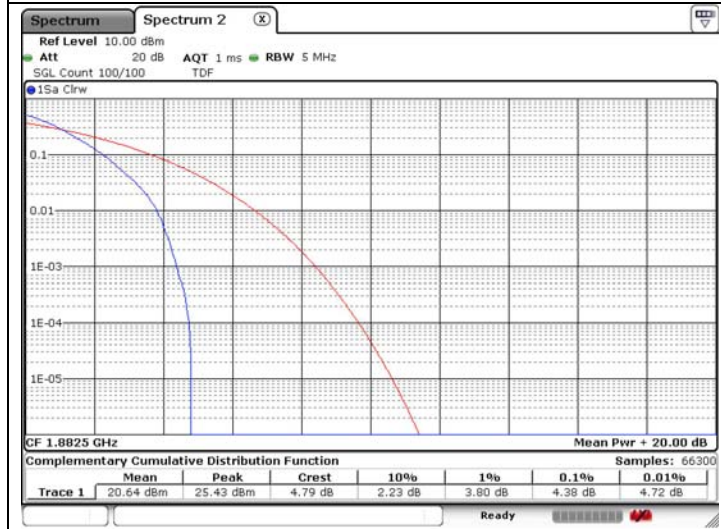


High Channel

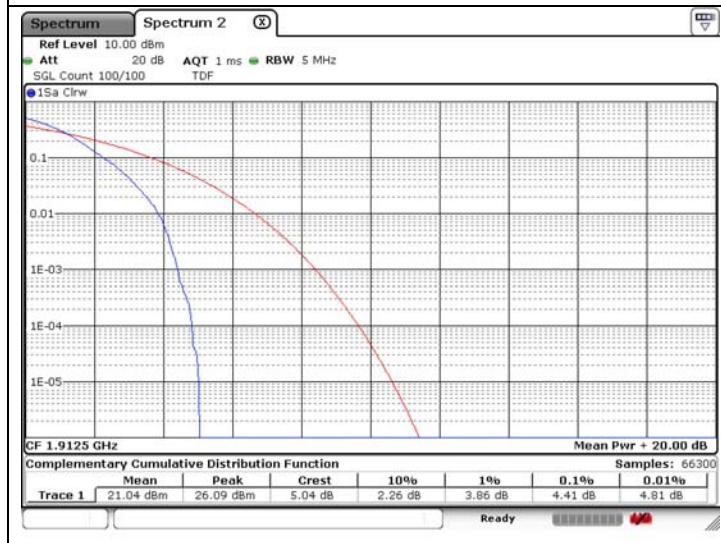


LTE band 25/2 (10 MHz – QPSK)


Low Channel

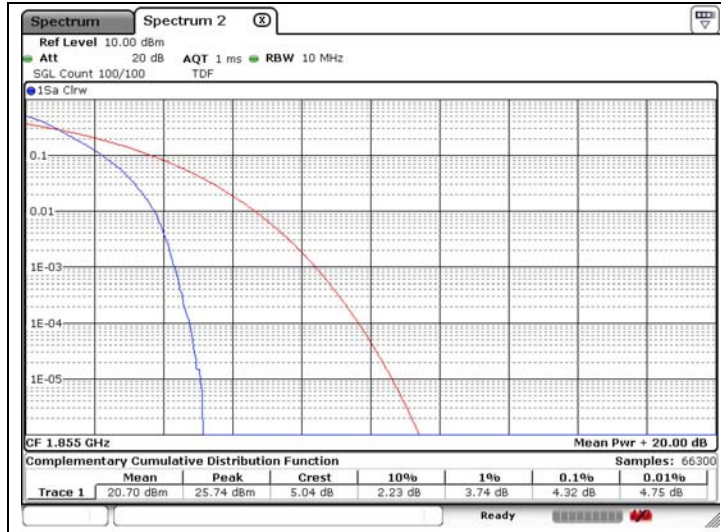

Middle Channel

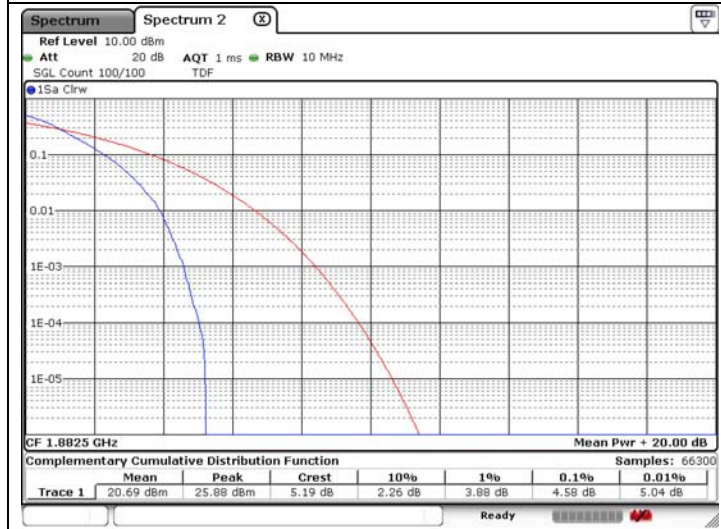


High Channel

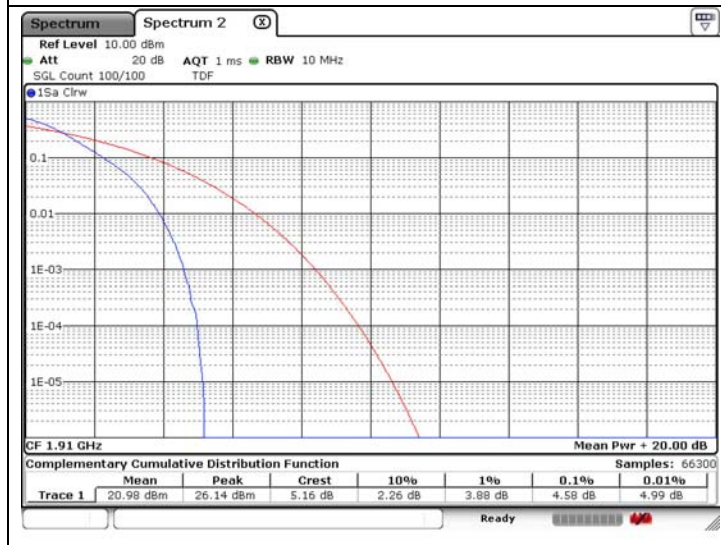


LTE band 25/2 (15 MHz – QPSK)


Low Channel

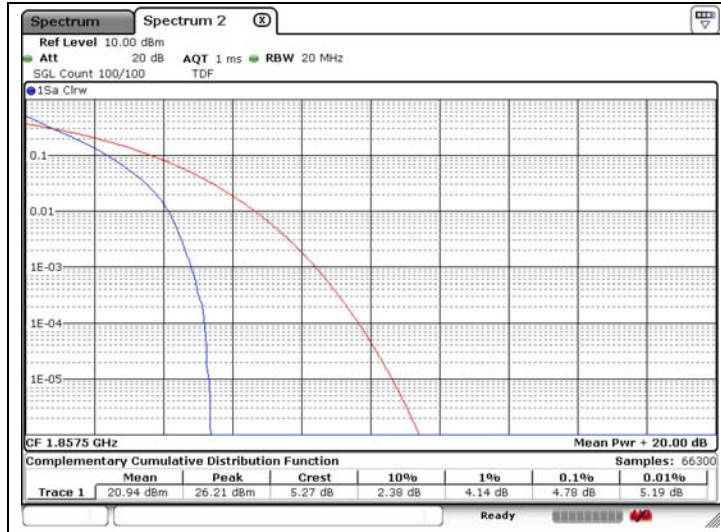

Middle Channel

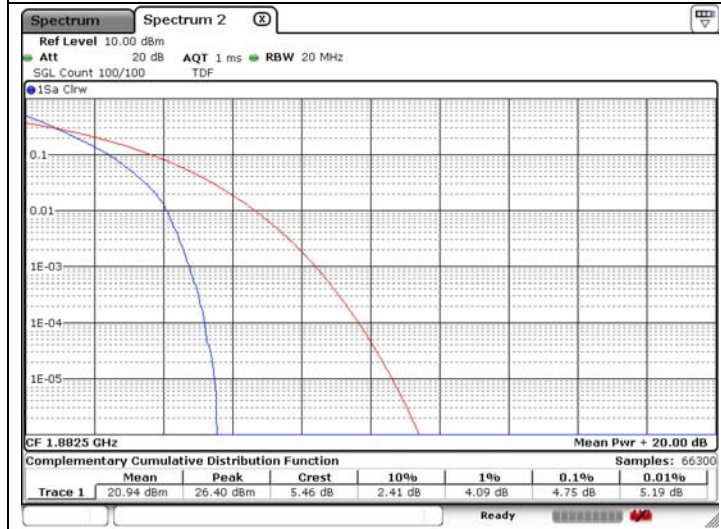


High Channel

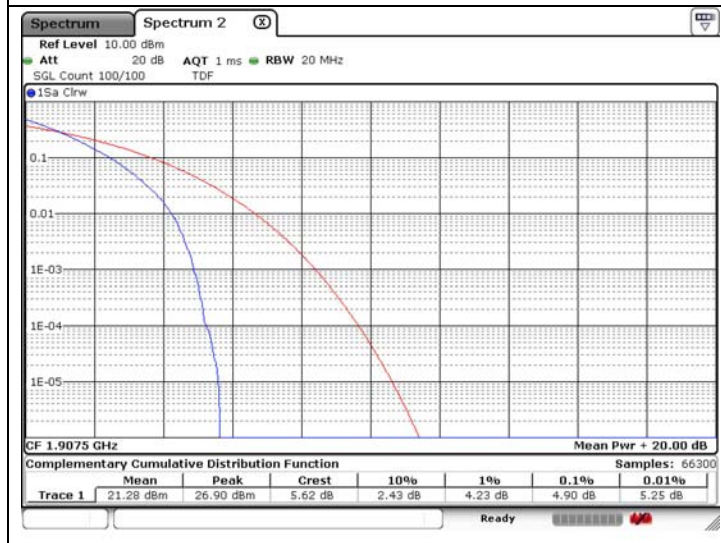


LTE band 25/2 (20 MHz – QPSK)


Low Channel

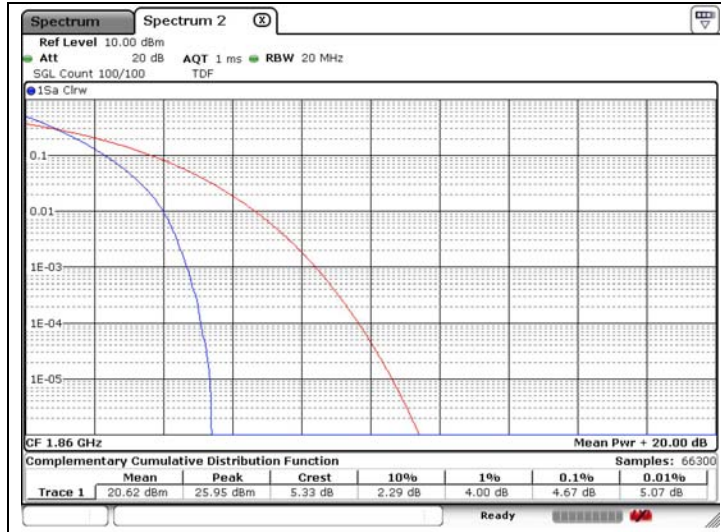

Middle Channel

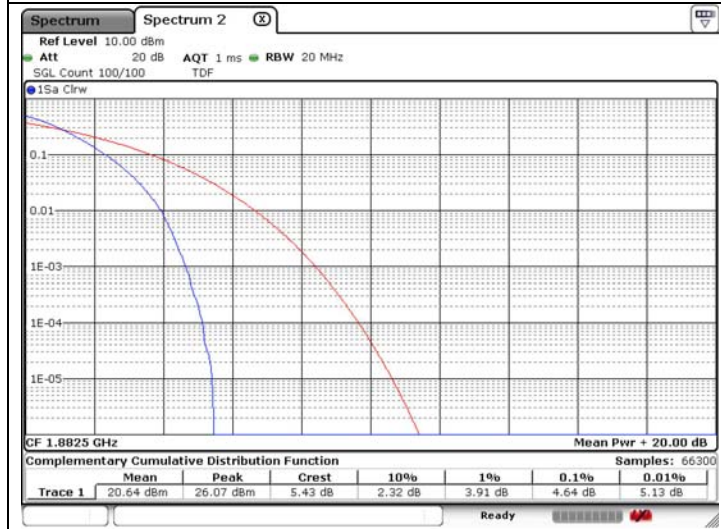

High Channel

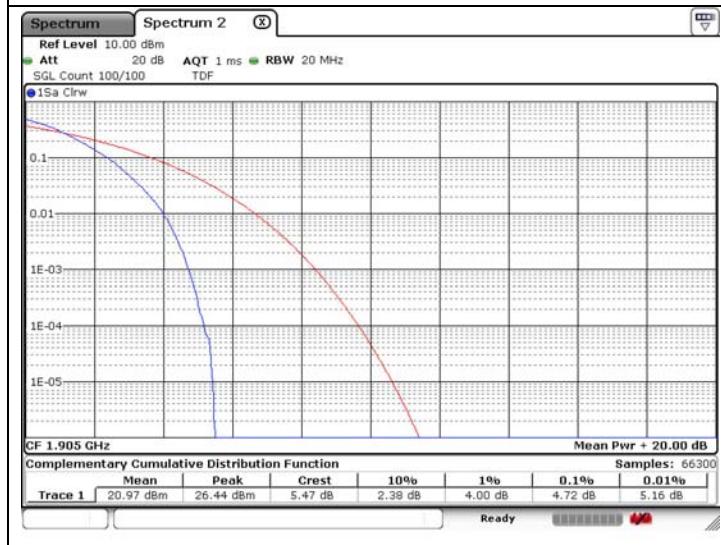


LTE band 26/5 (1.4 MHz – QPSK)


Low Channel




Middle Channel

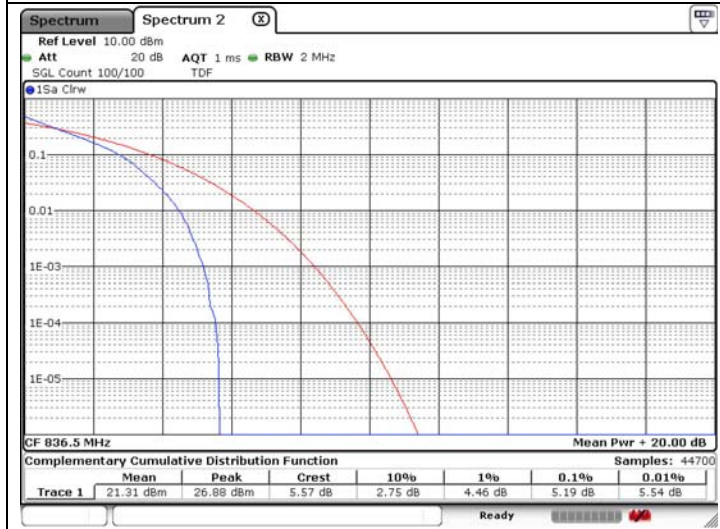


High Channel

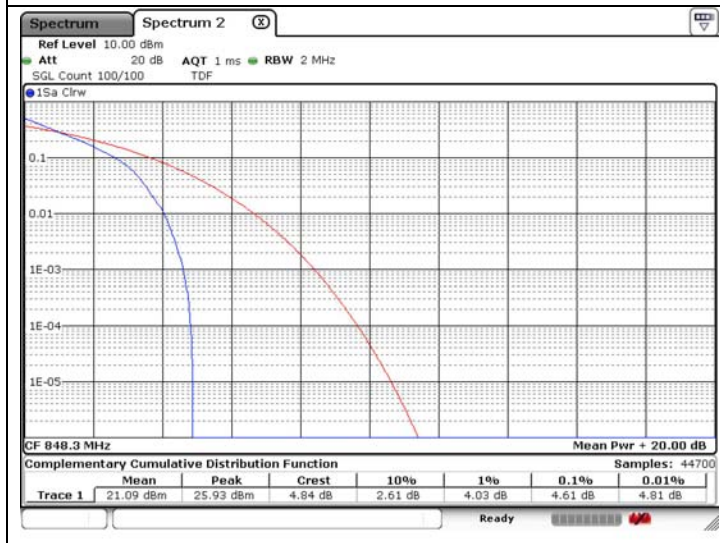


LTE band 26/5 (3 MHz – QPSK)
 Low Channel

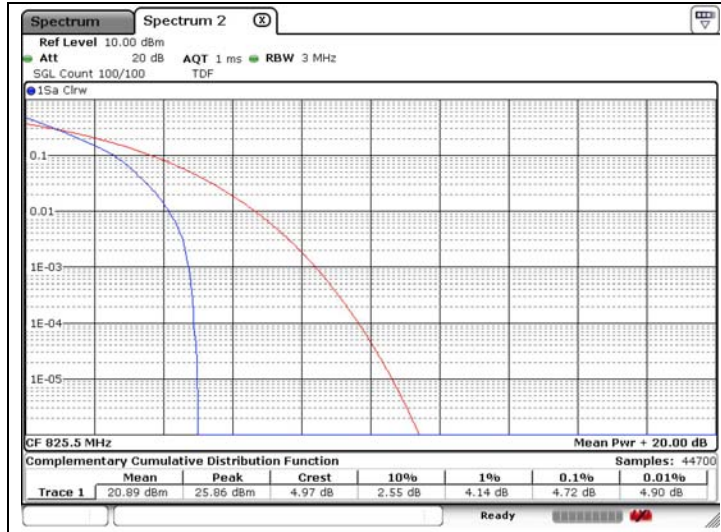

Middle Channel

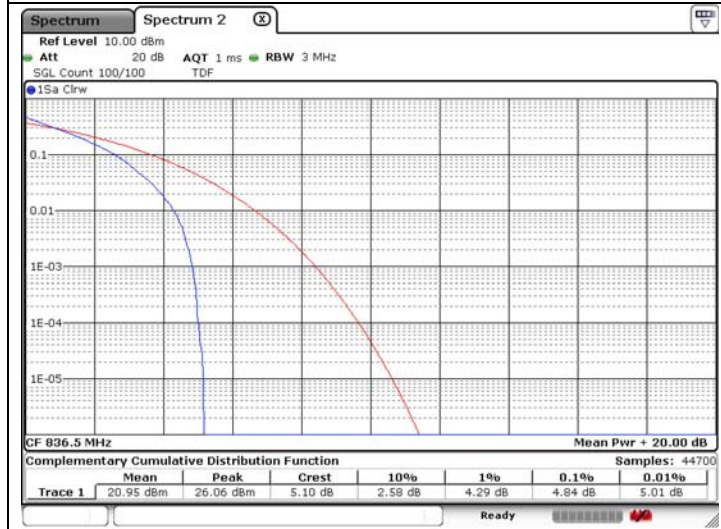


High Channel

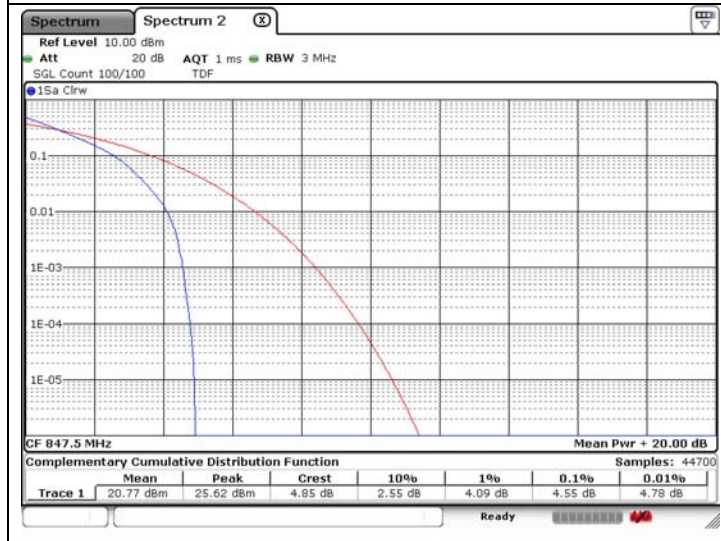


LTE band 26/5 (5 MHz – QPSK)


Low Channel

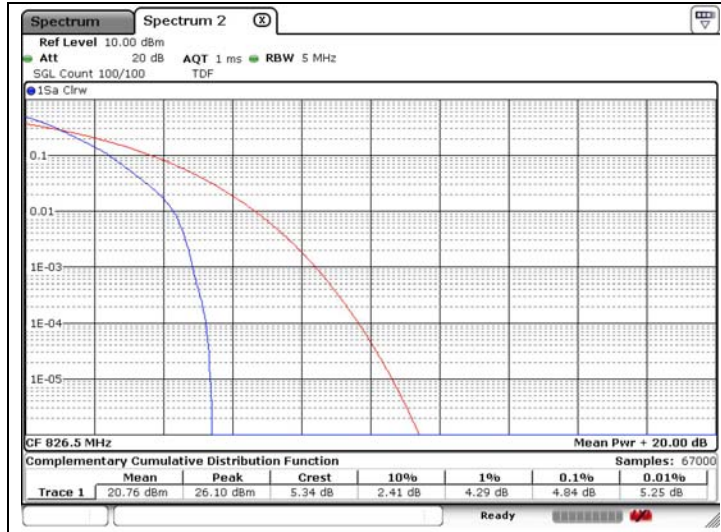

Middle Channel

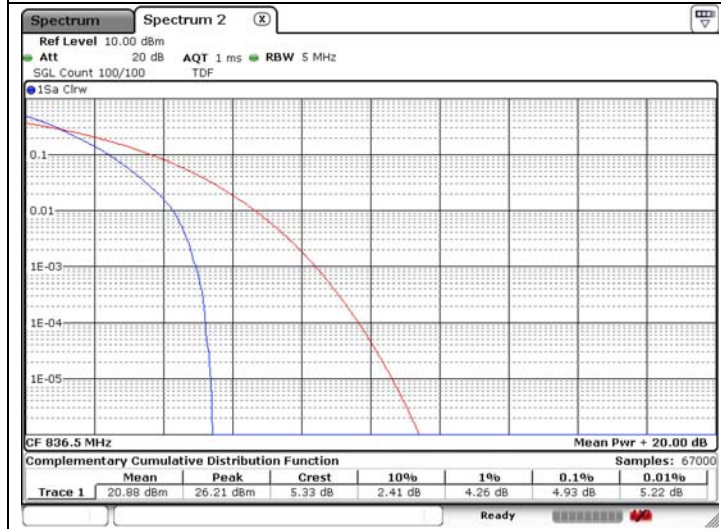


High Channel

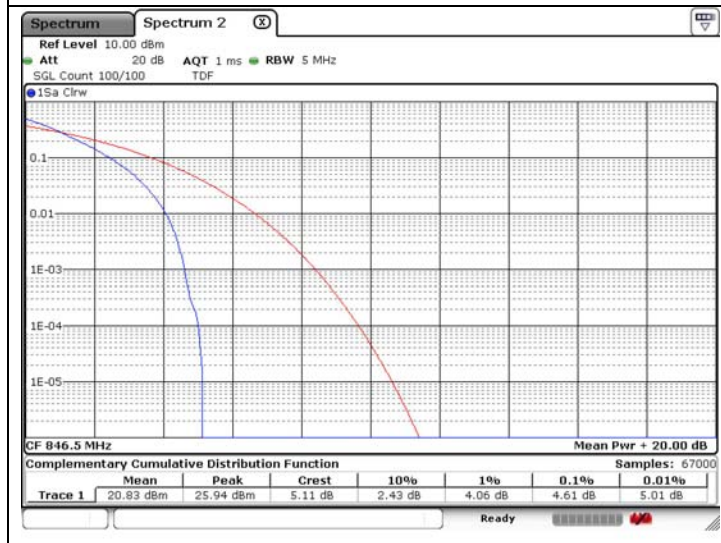


LTE band 26/5 (10 MHz – QPSK)


Low Channel

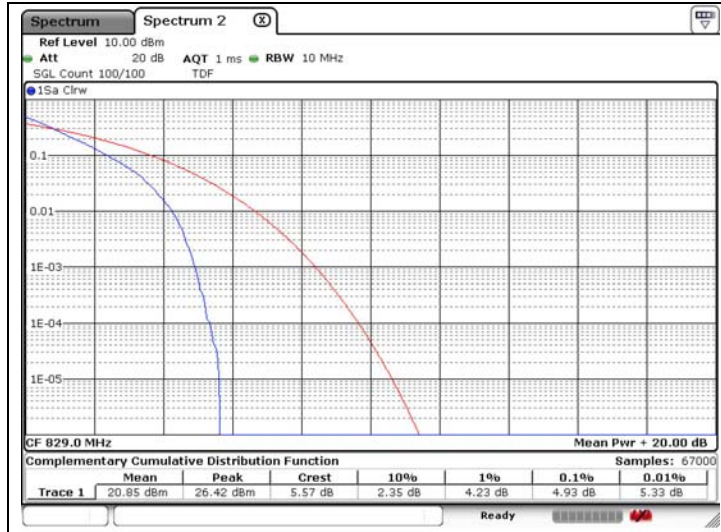

Middle Channel

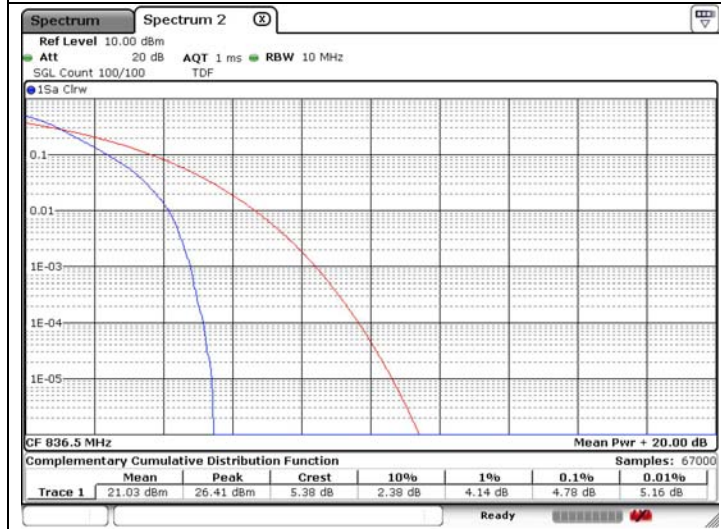


High Channel

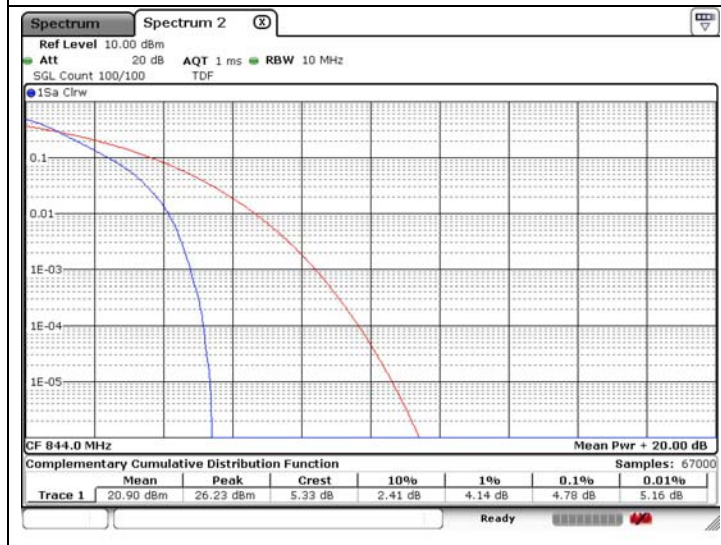


LTE band 26 (15 MHz – QPSK)


Low Channel

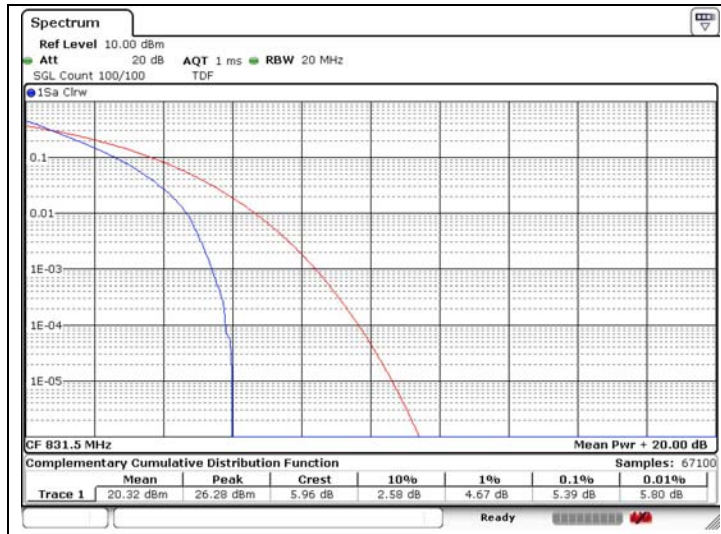


High Channel

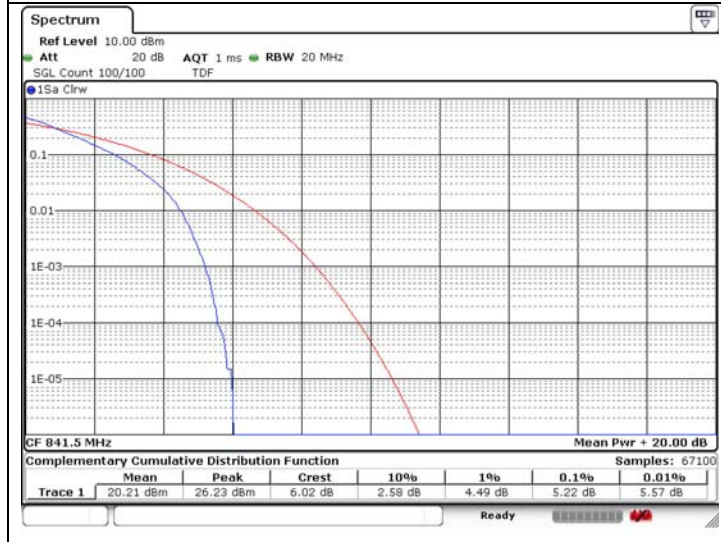


LTE band 41 (5 MHz – QPSK)
 Low Channel

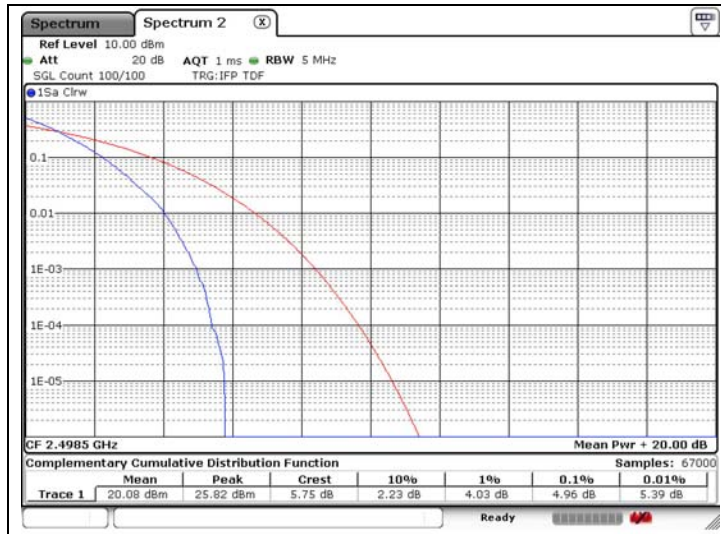

Middle Channel

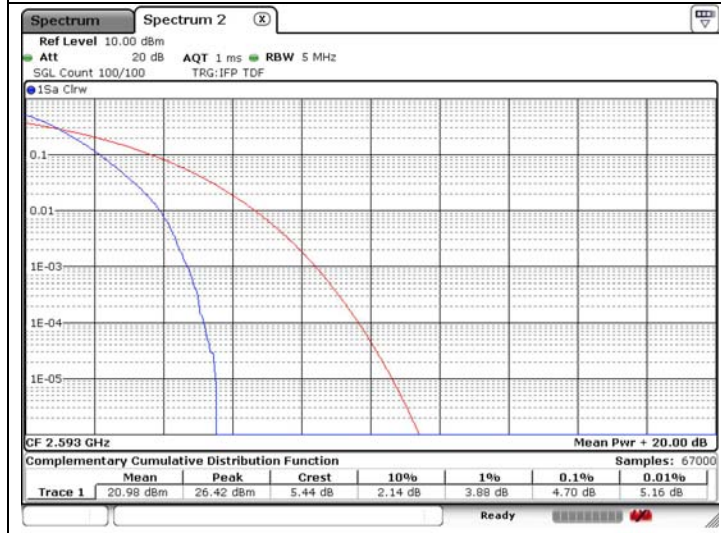


High Channel

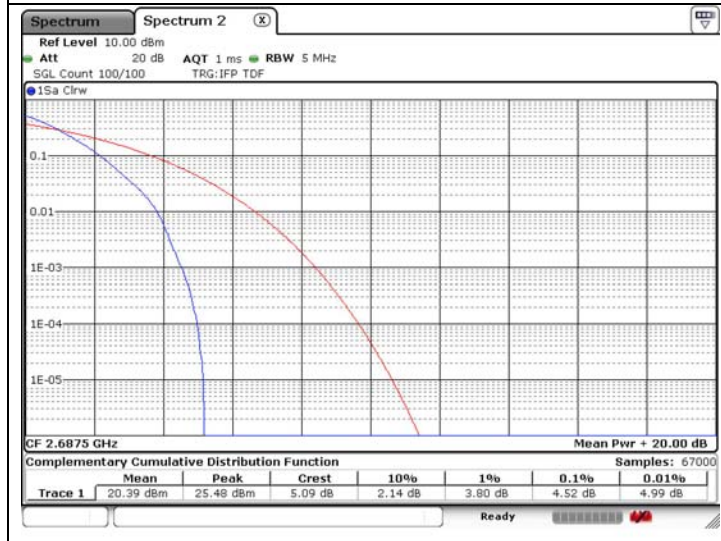


LTE band 41 (10 MHz – QPSK)


Low Channel

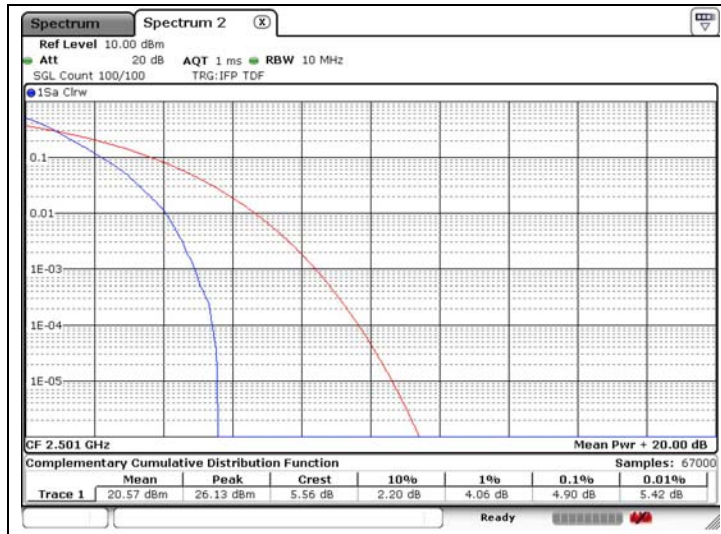

Middle Channel

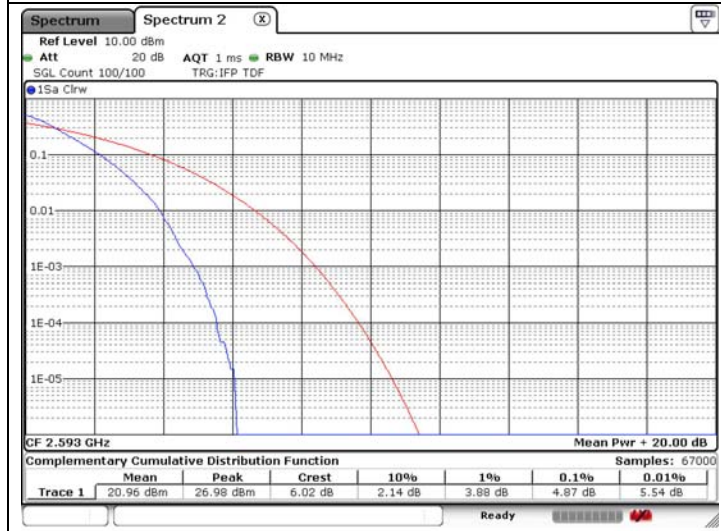

High Channel

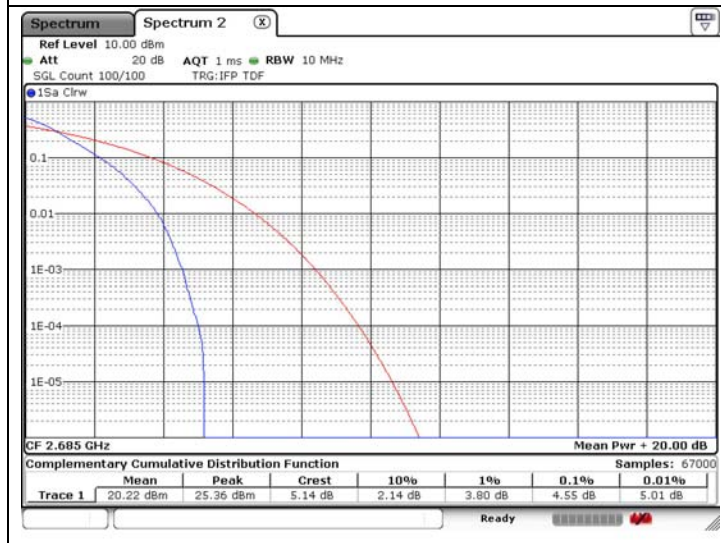


LTE band 41 (15 MHz – QPSK)


Low Channel



Middle Channel

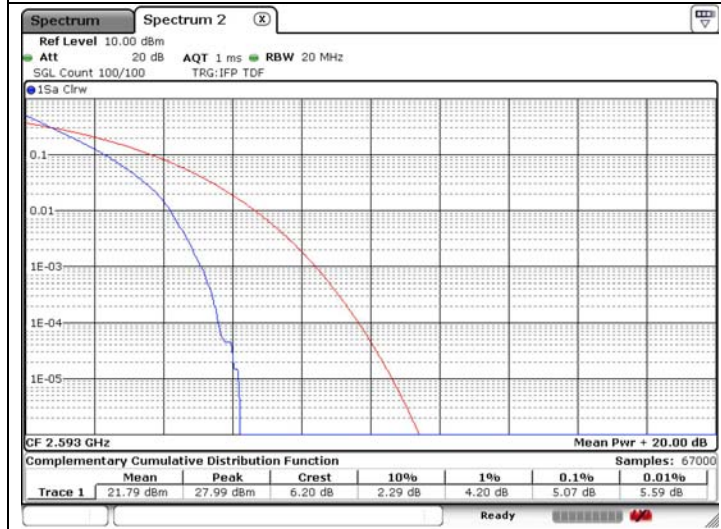


High Channel

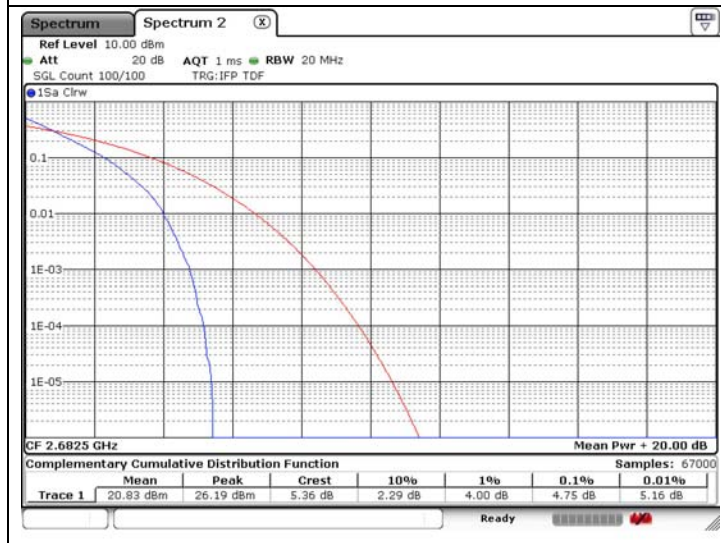


LTE band 41 (20 MHz – QPSK)


Low Channel

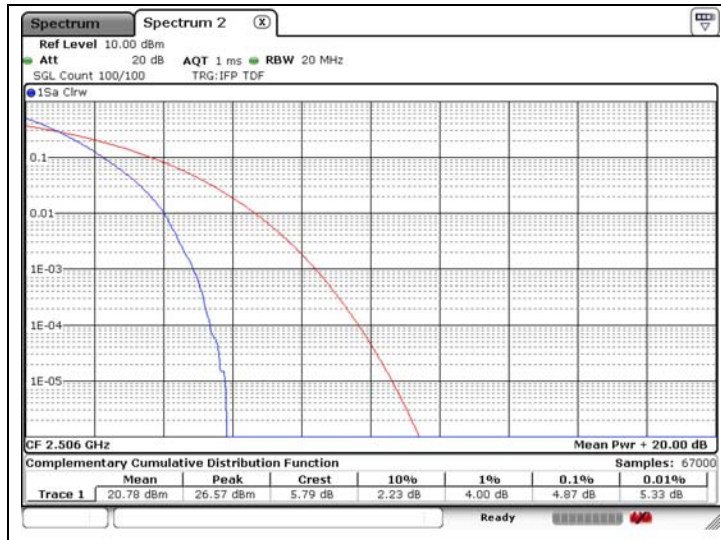

Middle Channel

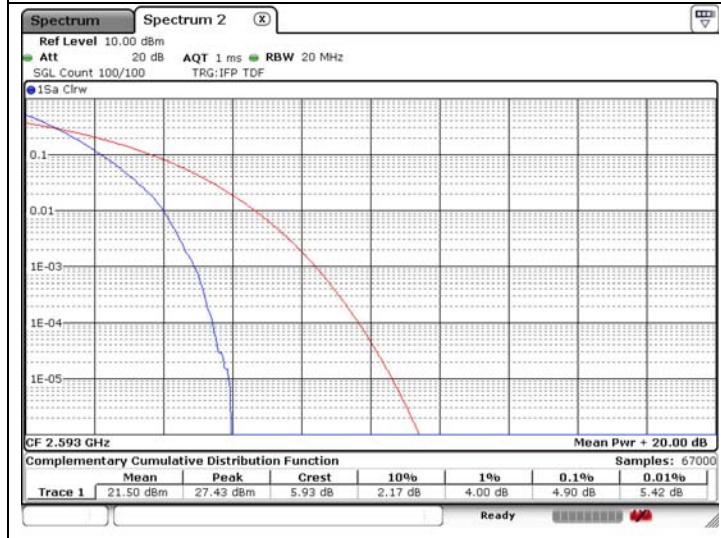


High Channel

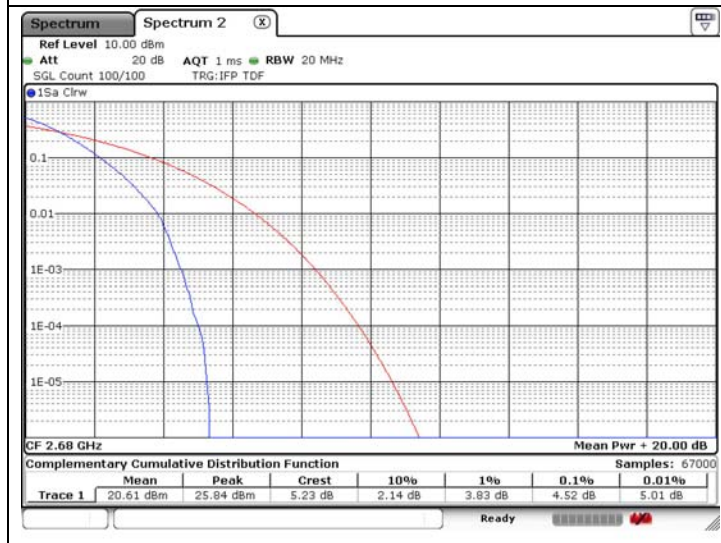


LTE band 66/4 (1.4 MHz – QPSK)

Low Channel

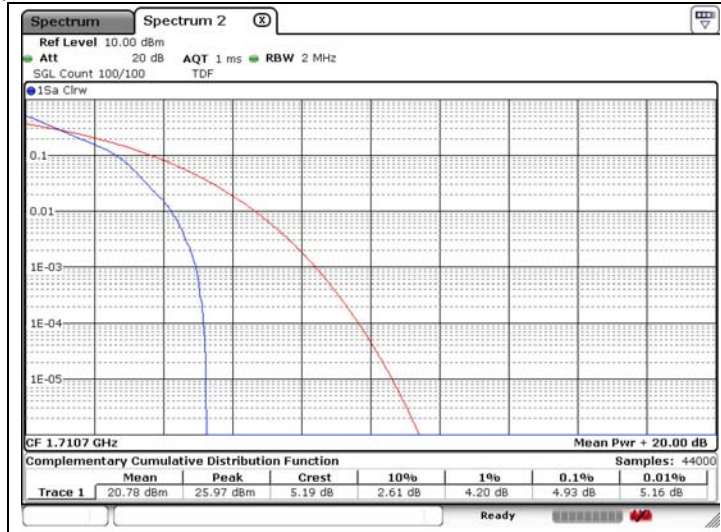


Middle Channel

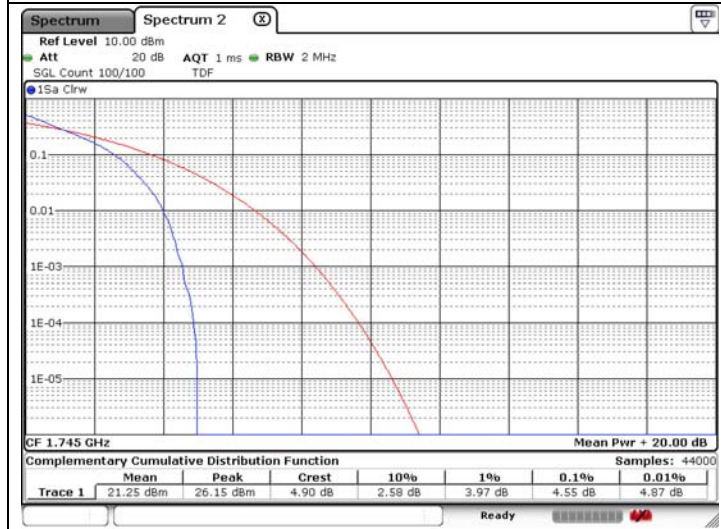


High Channel




LTE band 66/4 (3 MHz – QPSK)
 Low Channel

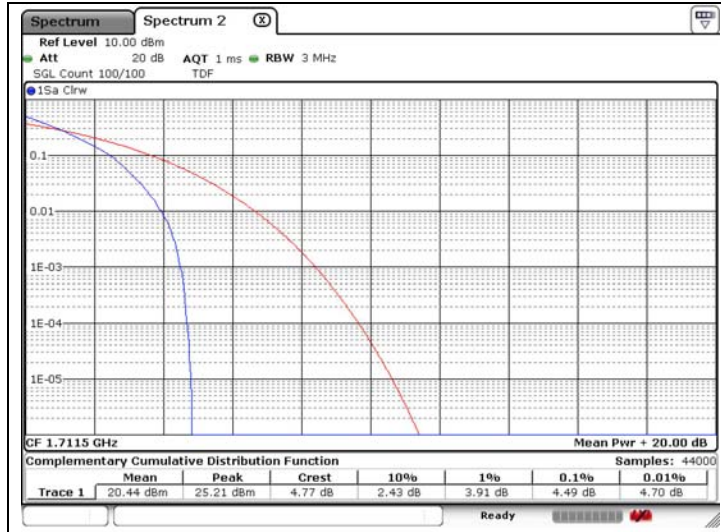

Middle Channel

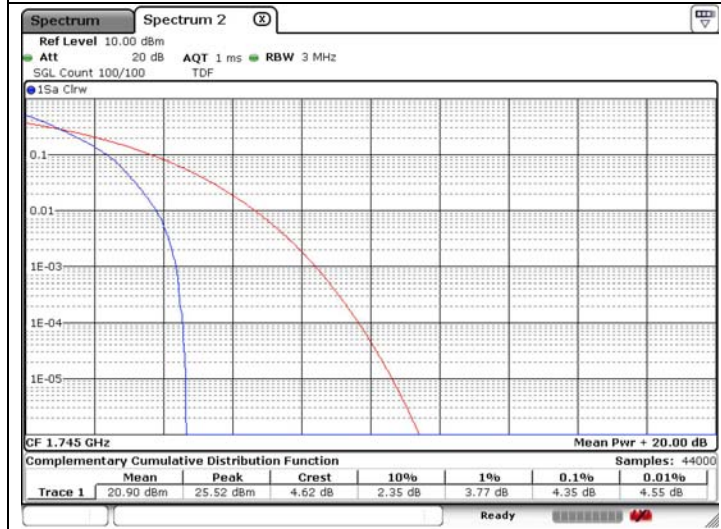


High Channel

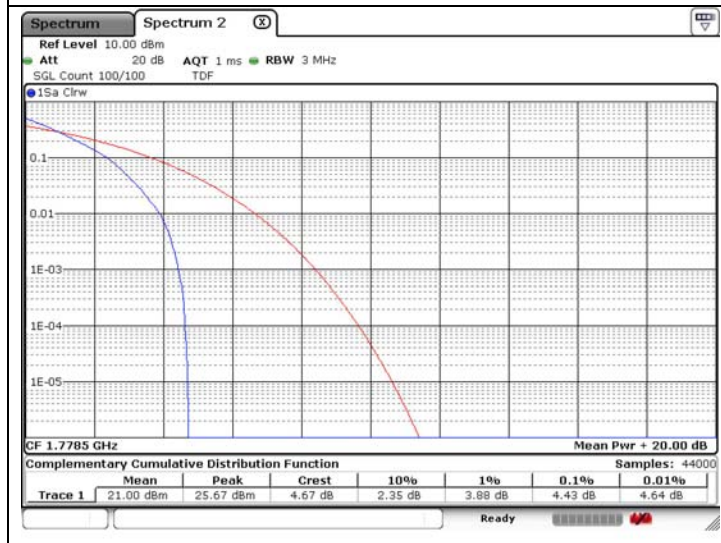

LTE band 66/4 (5 MHz – QPSK)


Low Channel

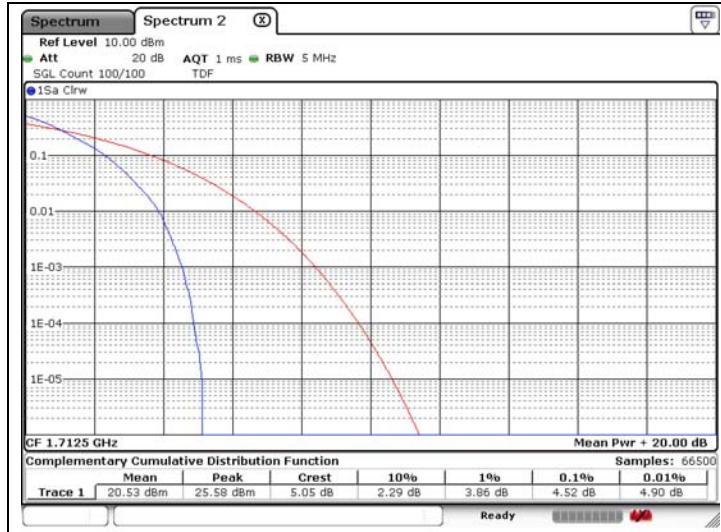

Middle Channel




High Channel

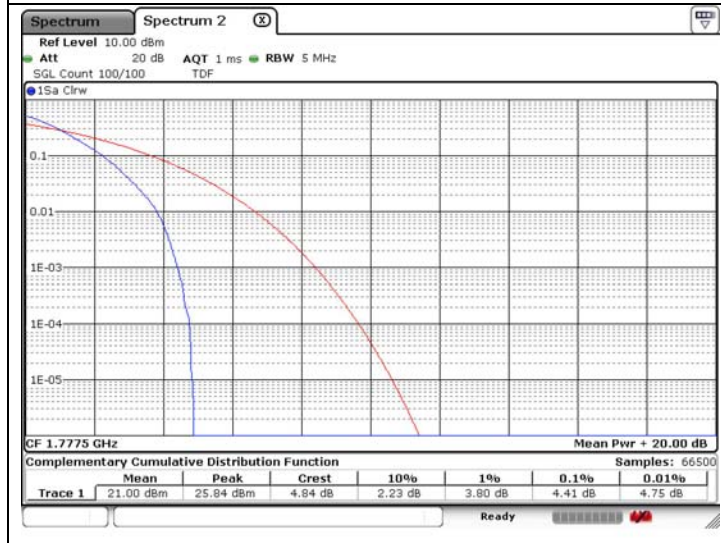


LTE band 66/4 (10 MHz – QPSK)


Low Channel

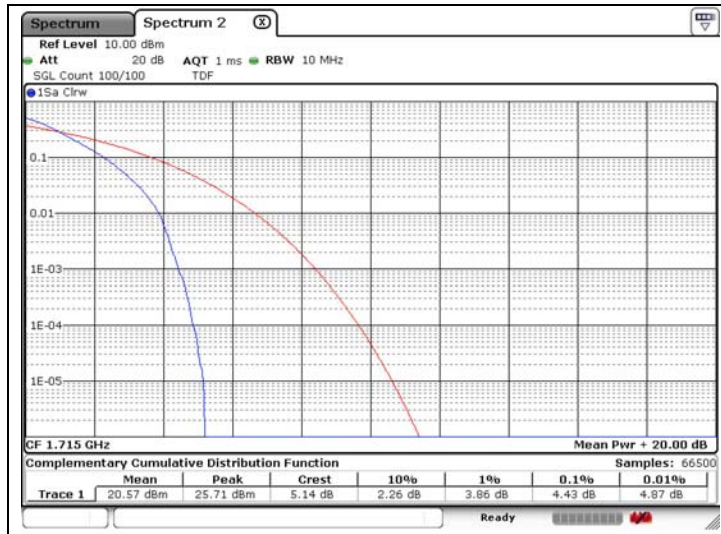

Middle Channel

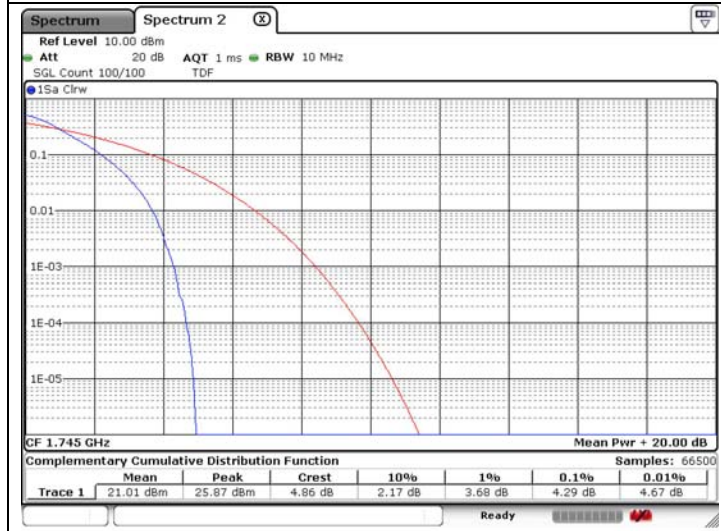

High Channel

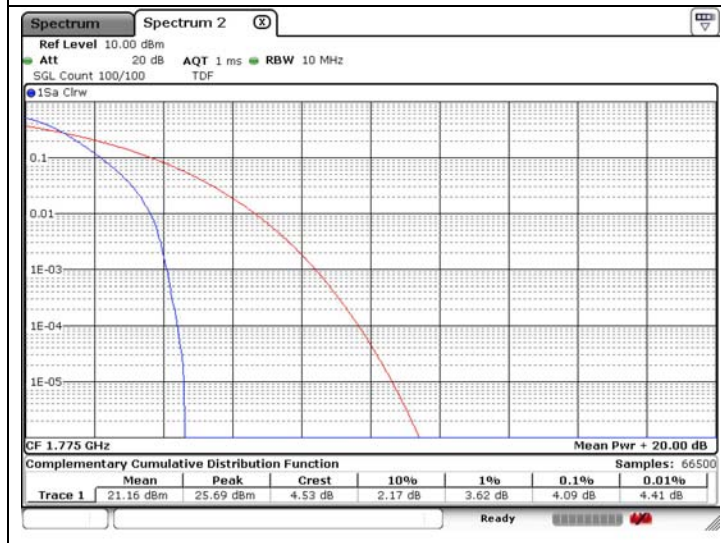


LTE band 66/4 (15 MHz – QPSK)

Low Channel



Middle Channel

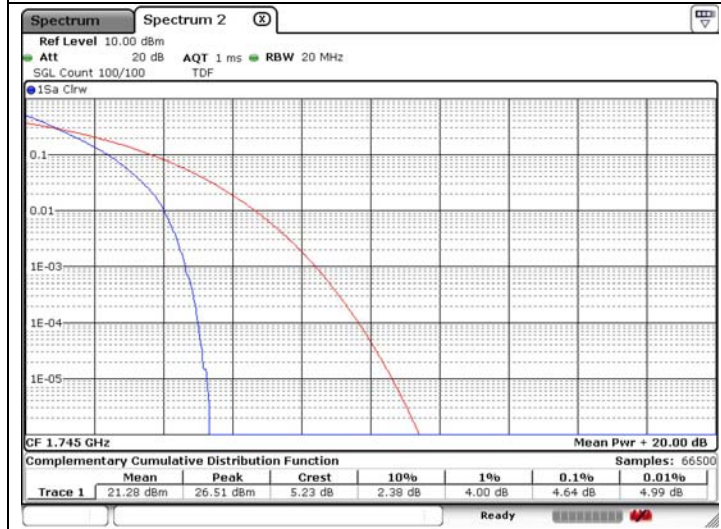


High Channel




LTE band 66/4 (20 MHz – QPSK)


Low Channel

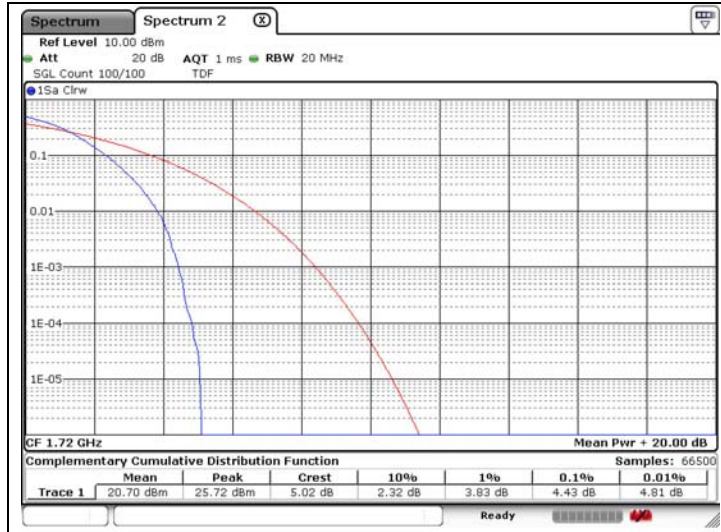


Middle Channel

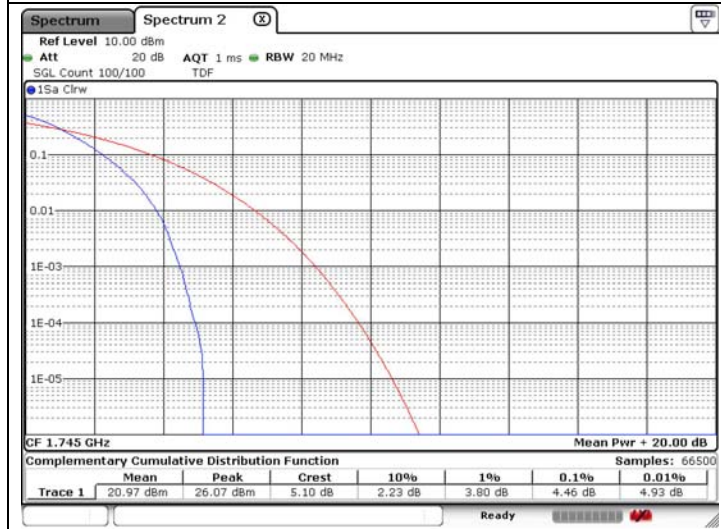


High Channel

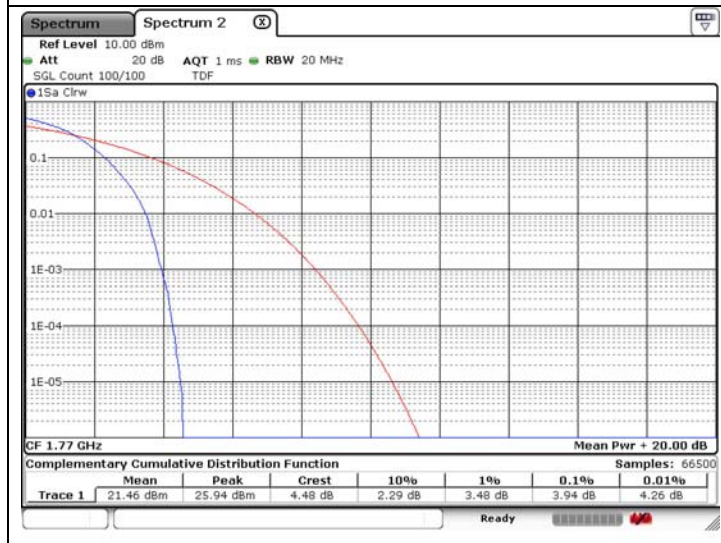


LTE band 71 (5 MHz – QPSK)
 Low Channel

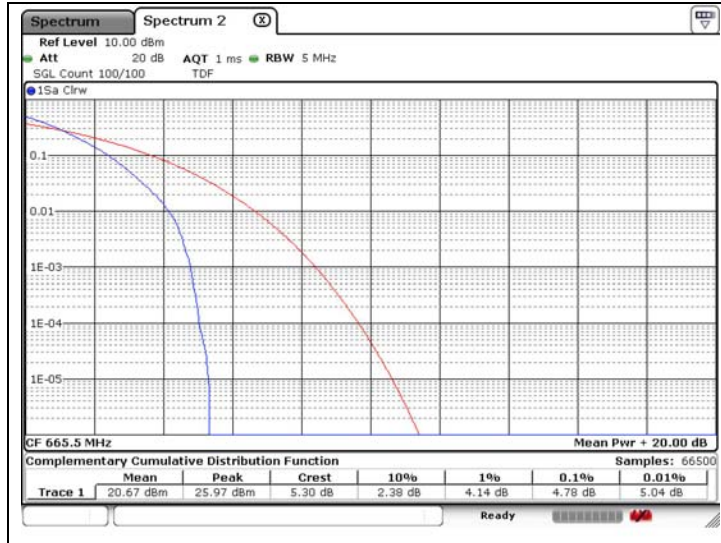

Middle Channel

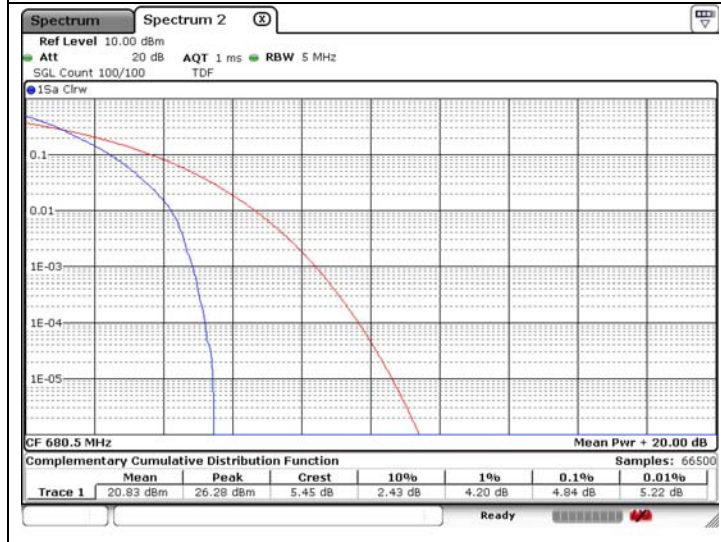


High Channel

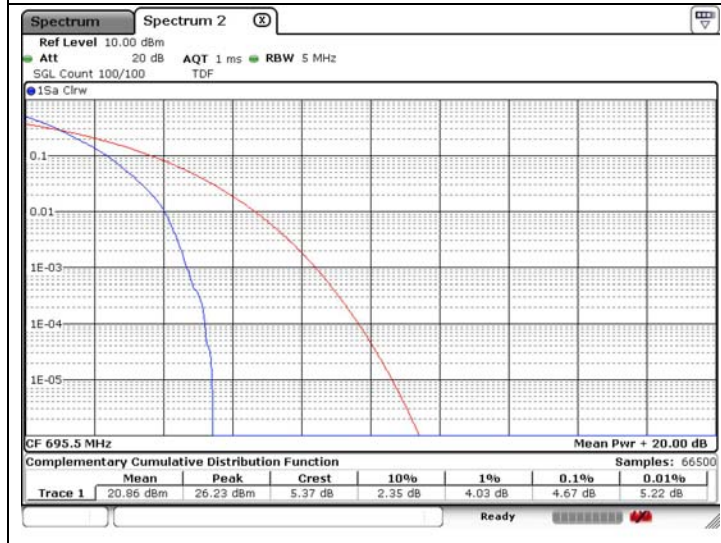


LTE band 71 (10 MHz – QPSK)


Low Channel

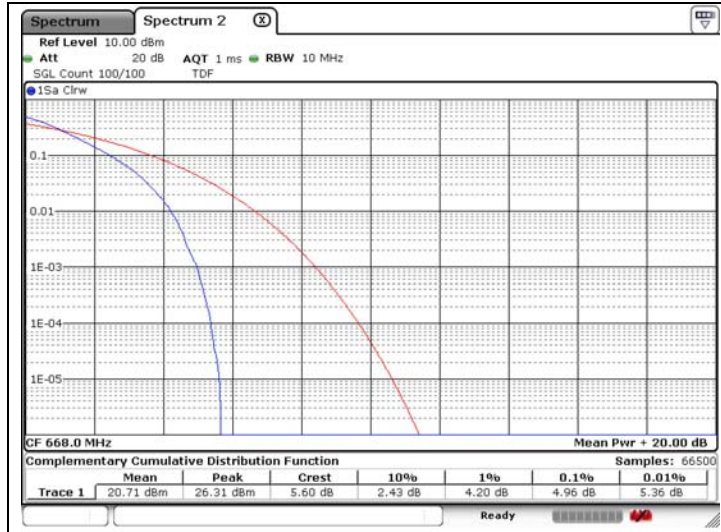

Middle Channel

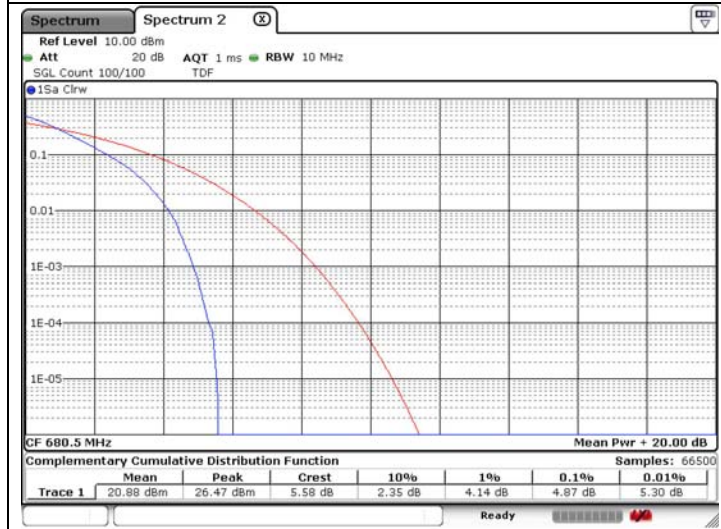


High Channel

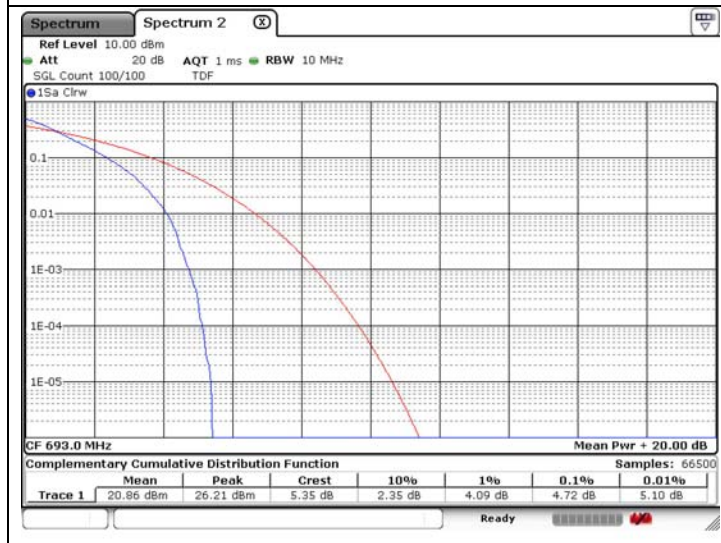


LTE band 71 (15 MHz – QPSK)

Low Channel

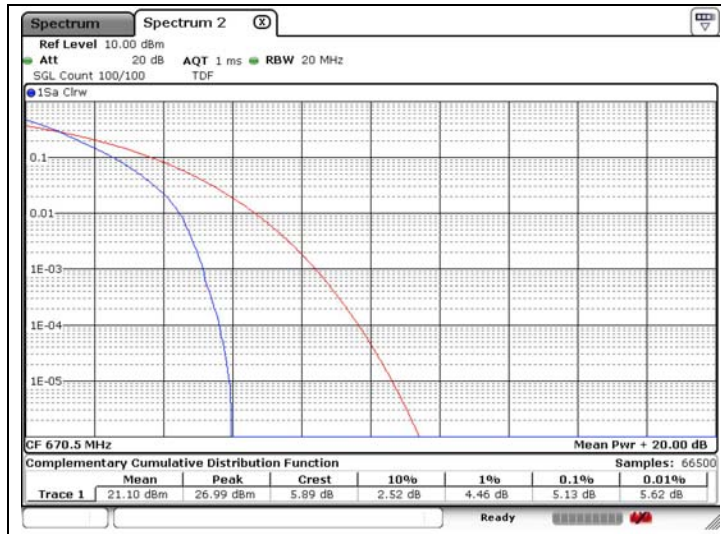

Middle Channel

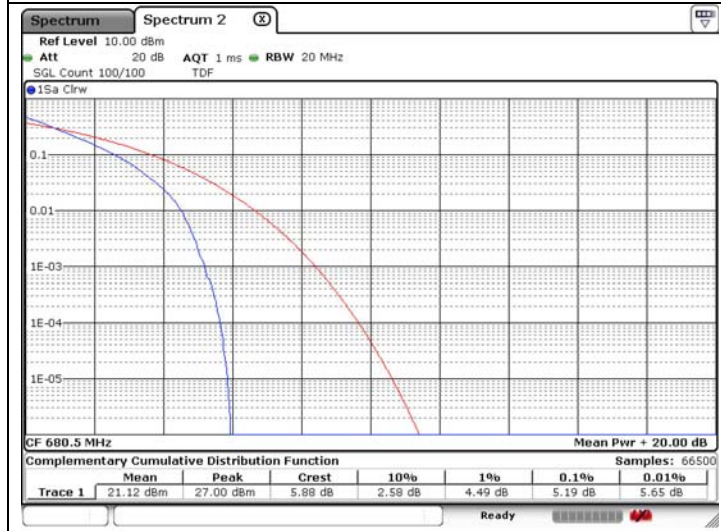


High Channel




LTE band 71 (20 MHz – QPSK)


Low Channel

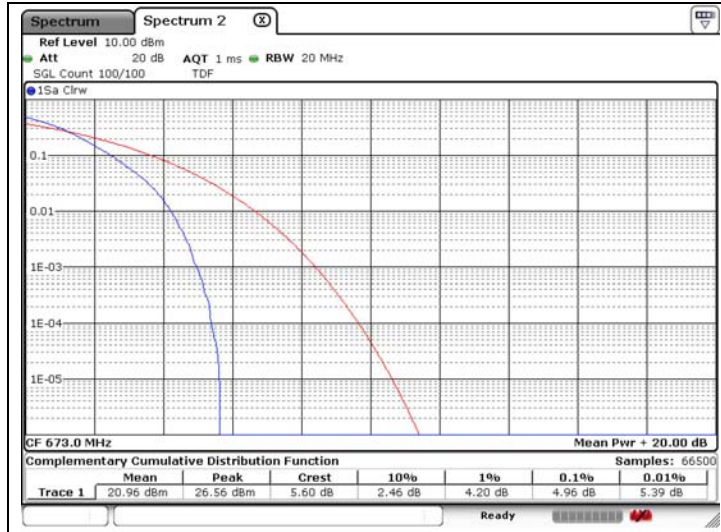

Middle Channel

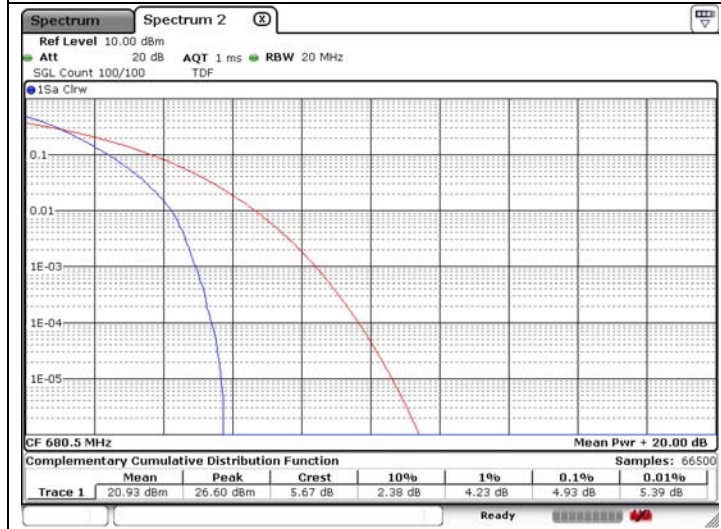

High Channel

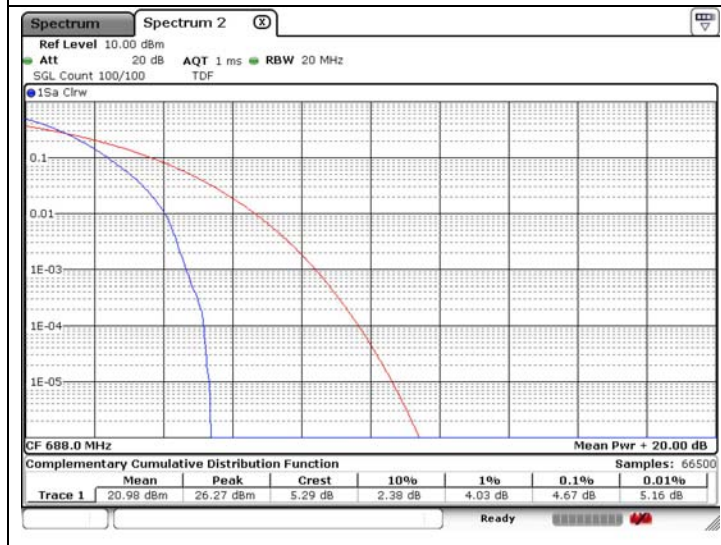

6. Spurious Emissions at Antenna Terminal

6.1. Limit

FCC

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

- §27.53(g), the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

- §27.53(h)(1), for operations in the 1 695-1 710 MHz, 1 710-1 755 MHz, 1 755-1 780 MHz, 1 915-1 920 MHz, 1 995-2 000 MHz, 2 000-2 020 MHz, 2 110-2 155 MHz, 2 155-2 180 MHz, and 2 180-2 200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

- §27.53(m)(4), For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log_{10}(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log_{10}(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log_{10}(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log_{10}(P)$ dB on all frequencies between 2 490.5 MHz and 2 496 MHz and $55 + 10 \log_{10}(P)$ dB at or below 2 490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2 495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees

IC

- RSS-130 Issue 2

4.7.1, the unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dB W), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside the equipment's operating frequency block range, a resolution bandwidth of 30 kHz may be employed.

- RSS-132 Issue 3

5.5, Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1 % of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the occupied bandwidth, power integration over 100 kHz is required.

- RSS-133 Issue 6

6.5, Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1 % of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the emission bandwidth, power integration over 1.0 MHz is required.

- RSS-139 Issue 3

6.6, (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1 % of the emission bandwidth shall be attenuated below the transmitter output power P (in dB W) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dB W) by at least $43 + 10 \log_{10} p$ (watts) dB.

- RSS-199 Issue 3

4.5, In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- a. for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$
- b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:
 - i. $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - ii. $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - iii. $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges


In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

6.2. Test Procedure

The test follows section 5.7 of ANSI C63.26-2015.

1. Start frequency was set to 9 kHz and stop frequency was set to at least 10* the fundamental frequency.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Sweep time = Auto couple.
5. The trace was allowed to stabilize.
6. Please see notes below for RBW and VBW settings.
7. For plots showing conducted spurious emissions from 9 kHz to 27 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as correction factor.

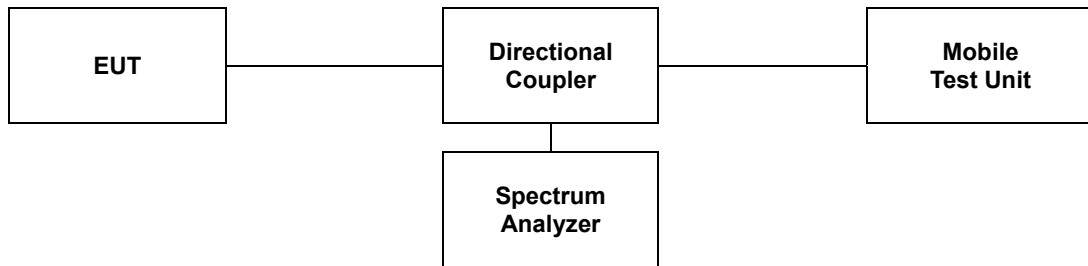

Note;


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two point, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

6.3. Test Results


Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

- Test plots


LTE band 7 (5 MHz – QPSK)
 Low Channel

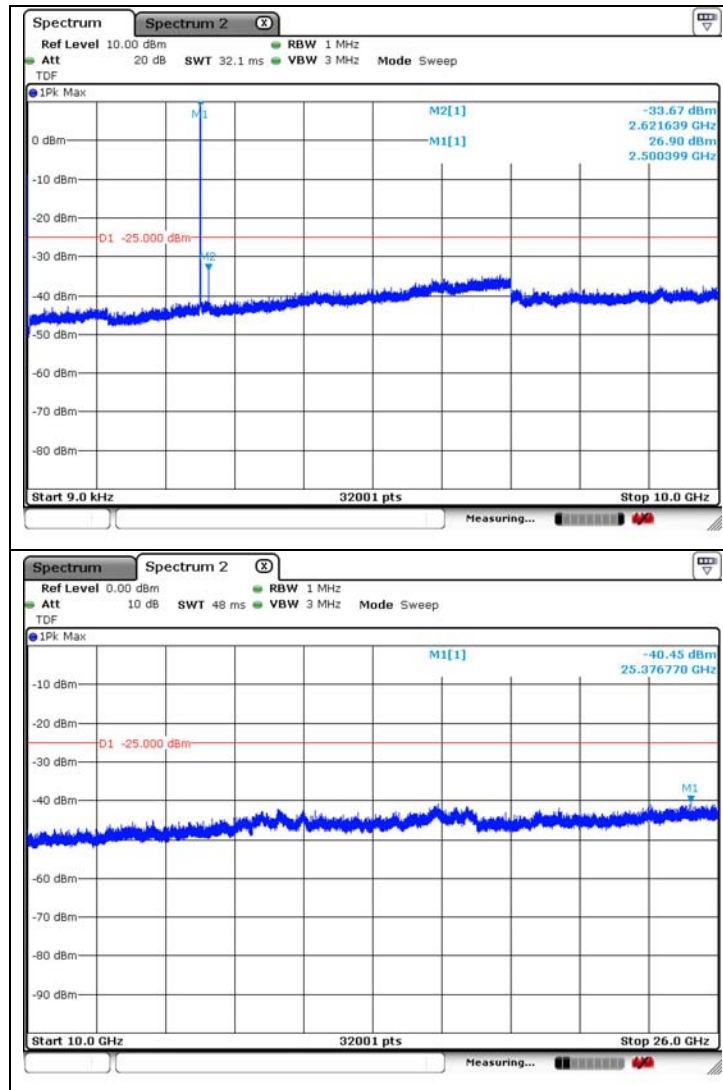


Middle Channel

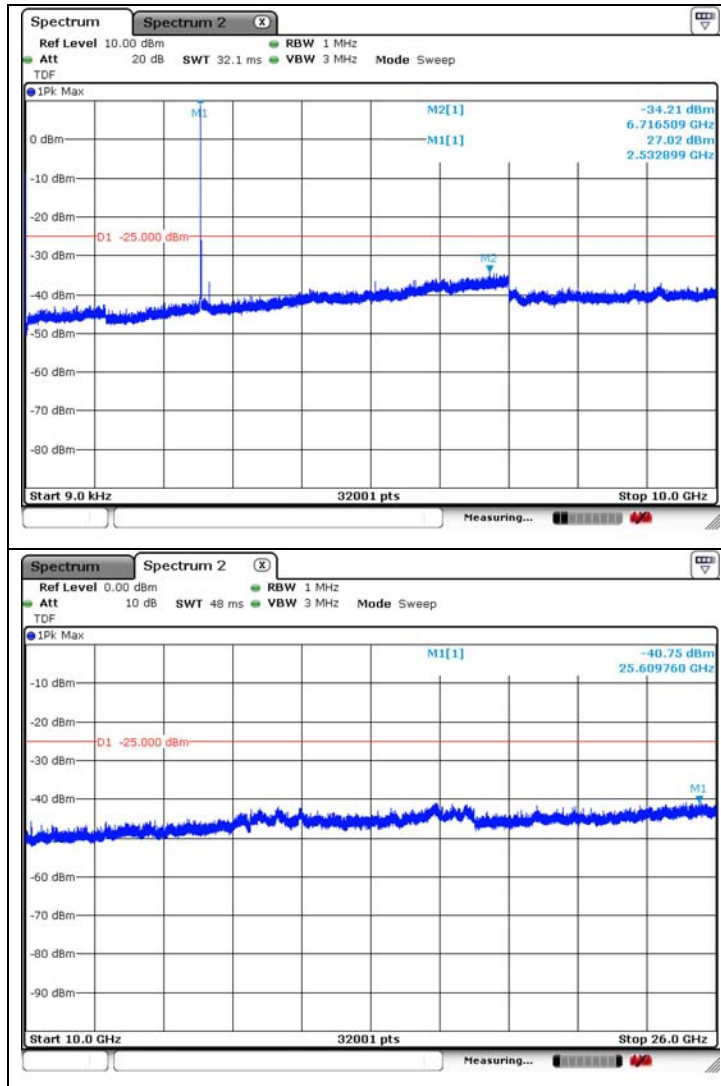


High Channel

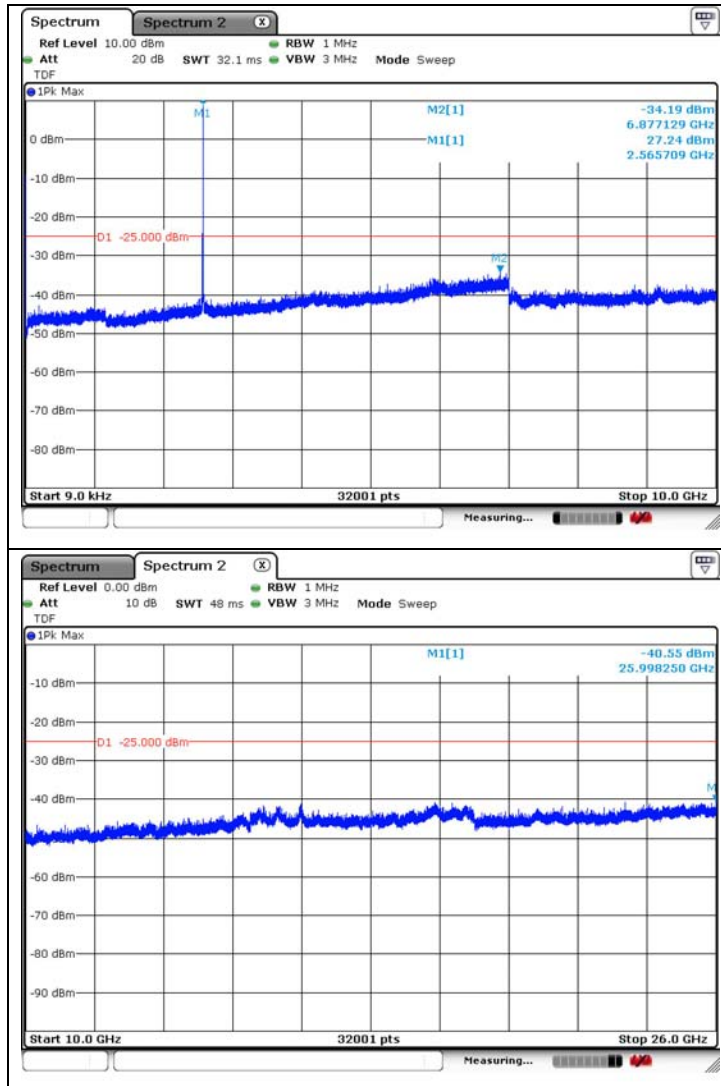


LTE band 7 (10 MHz – QPSK)
 Low Channel

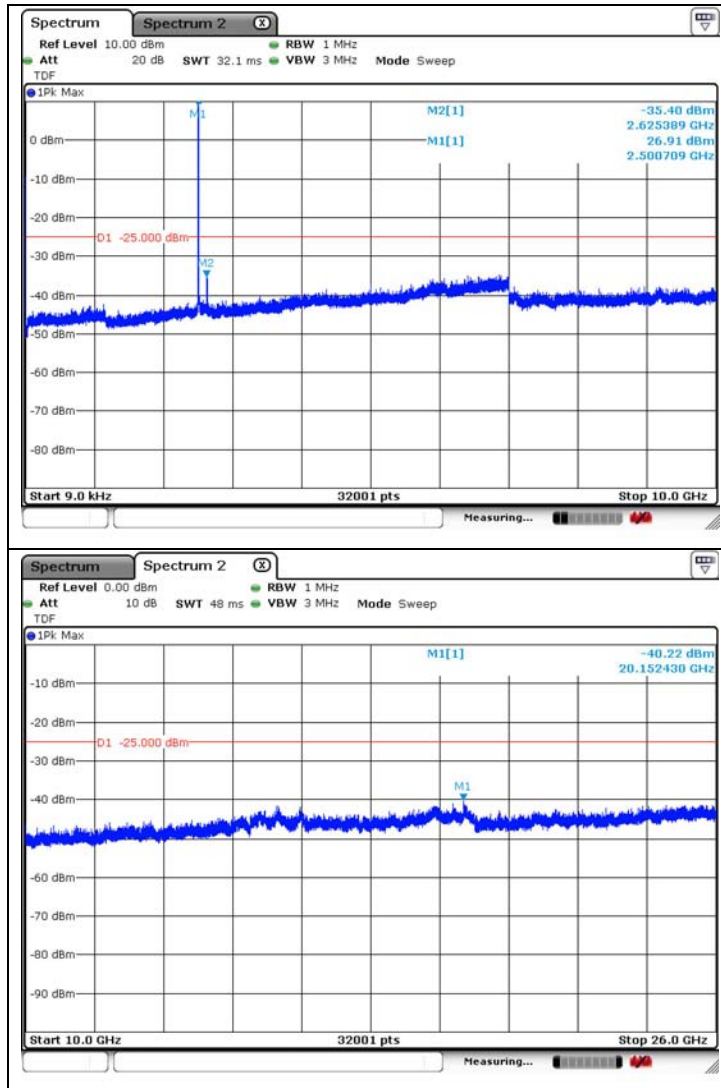


Middle Channel

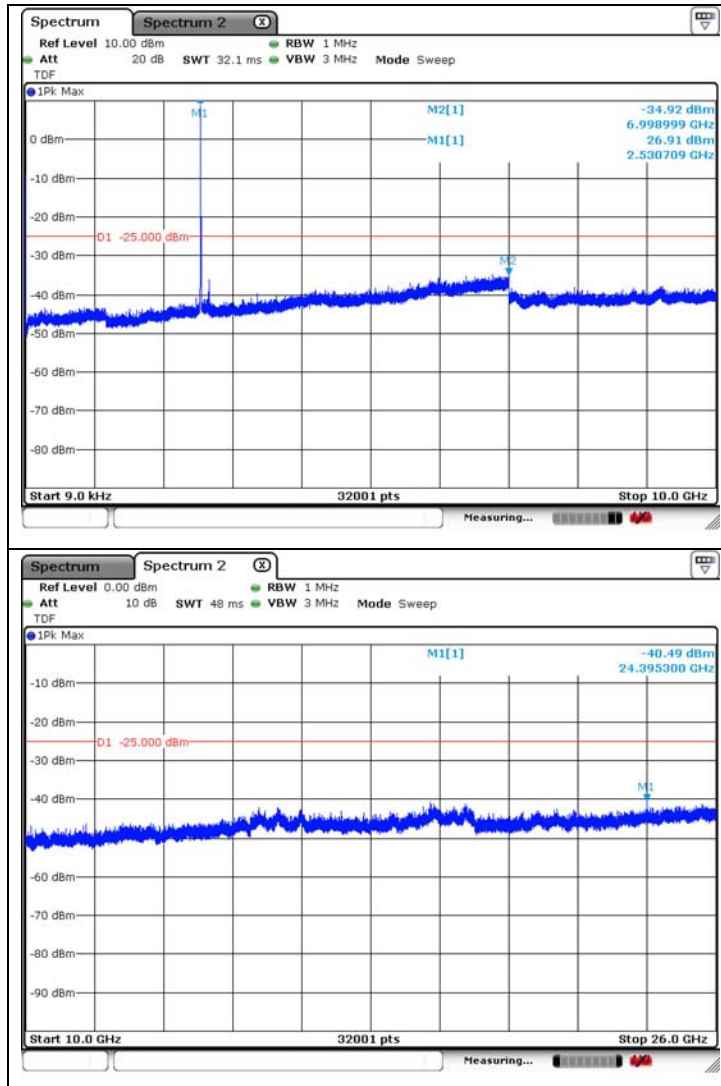


High Channel

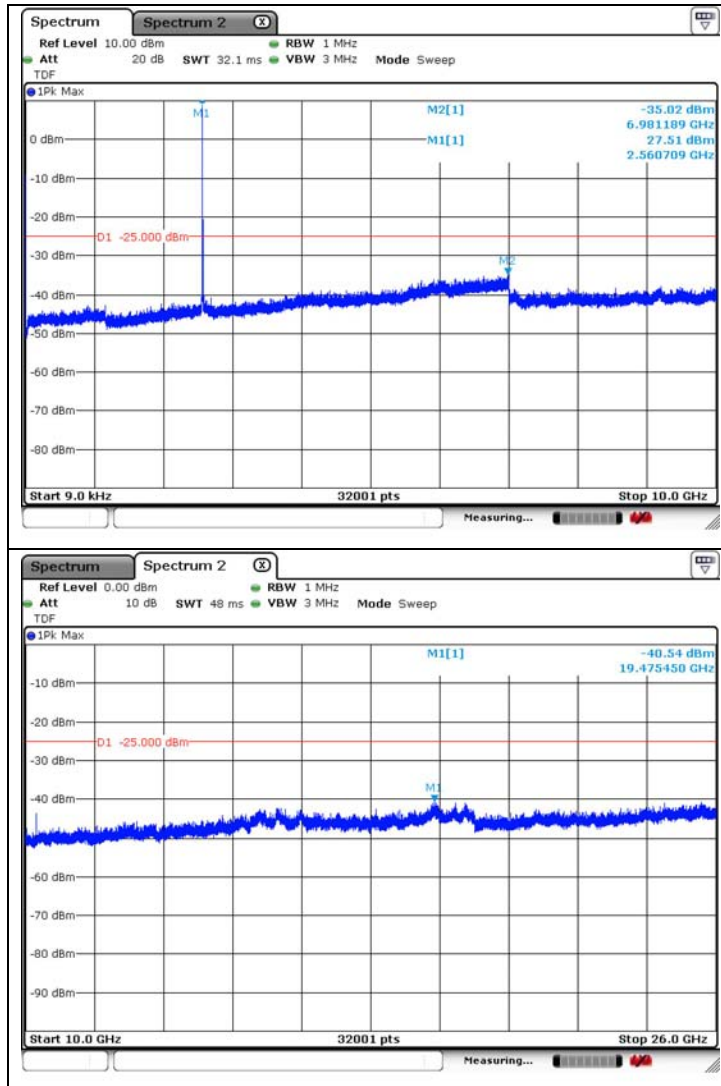


LTE band 7 (15 MHz – QPSK)
 Low Channel

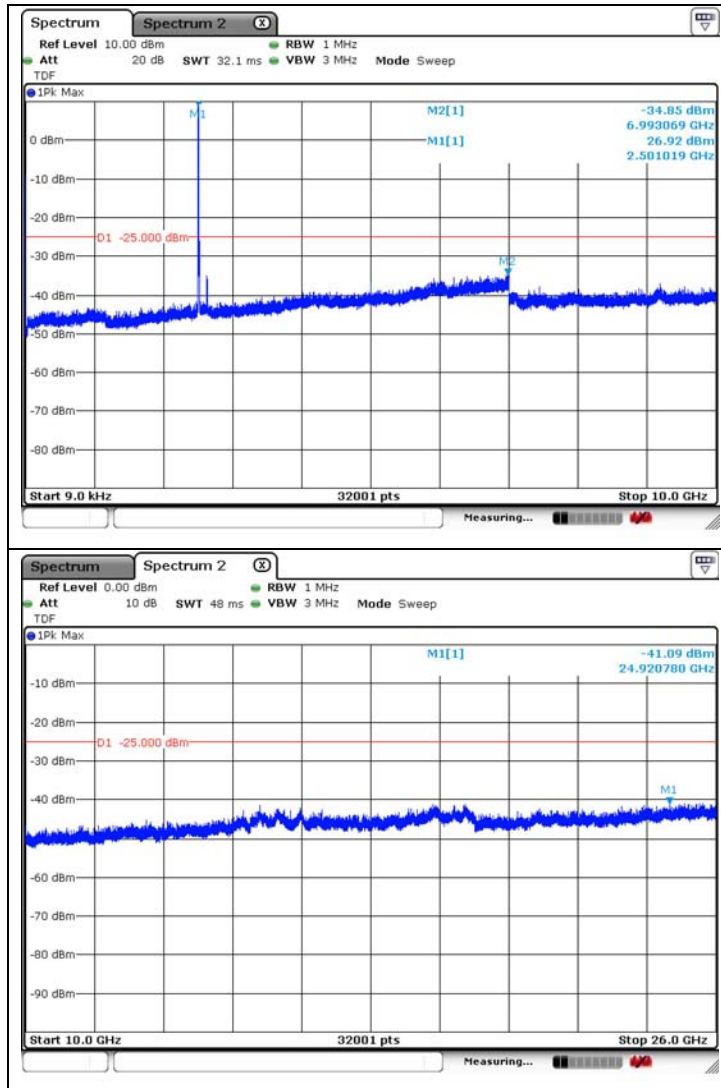


Middle Channel

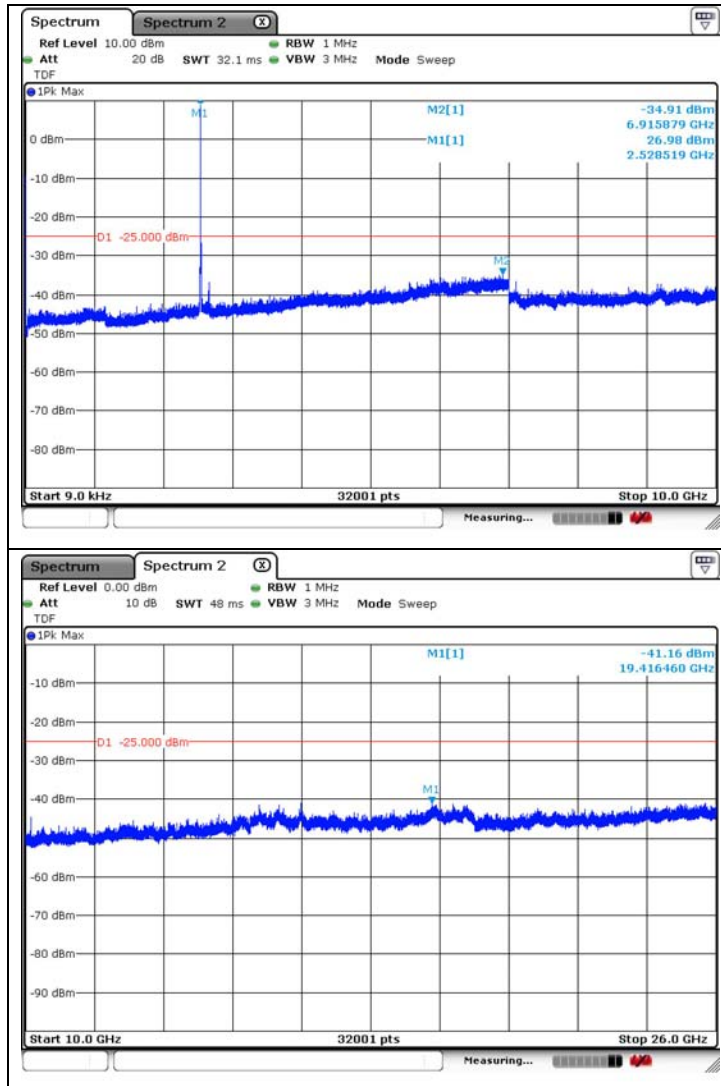


High Channel

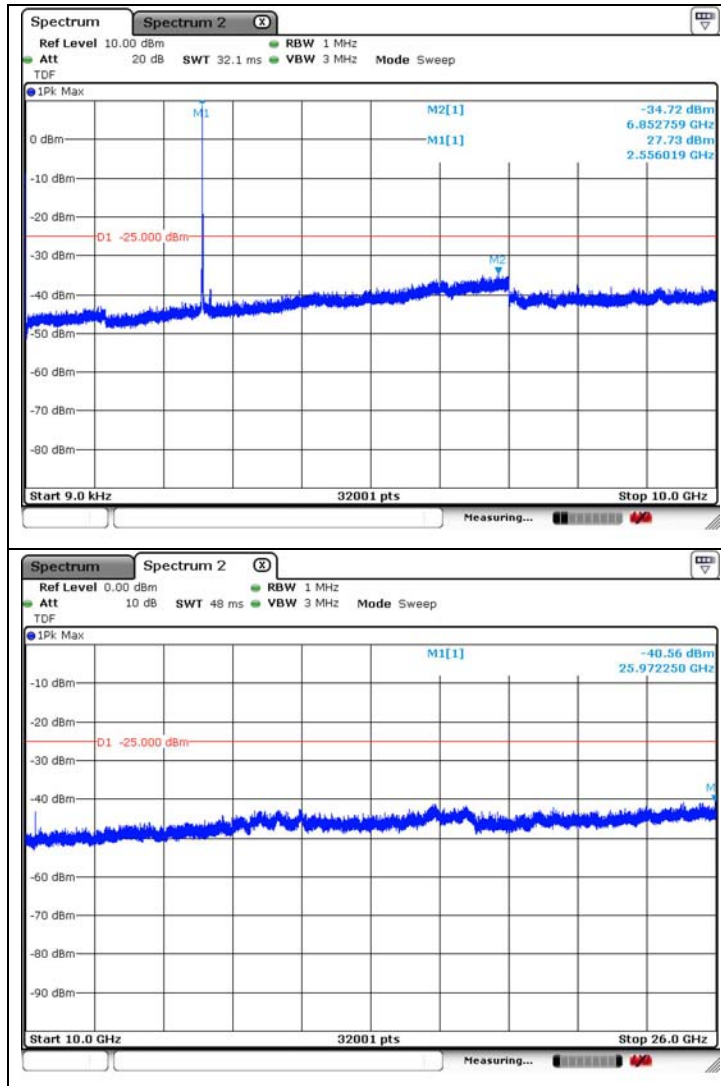


LTE band 7 (20 MHz – QPSK)
 Low Channel

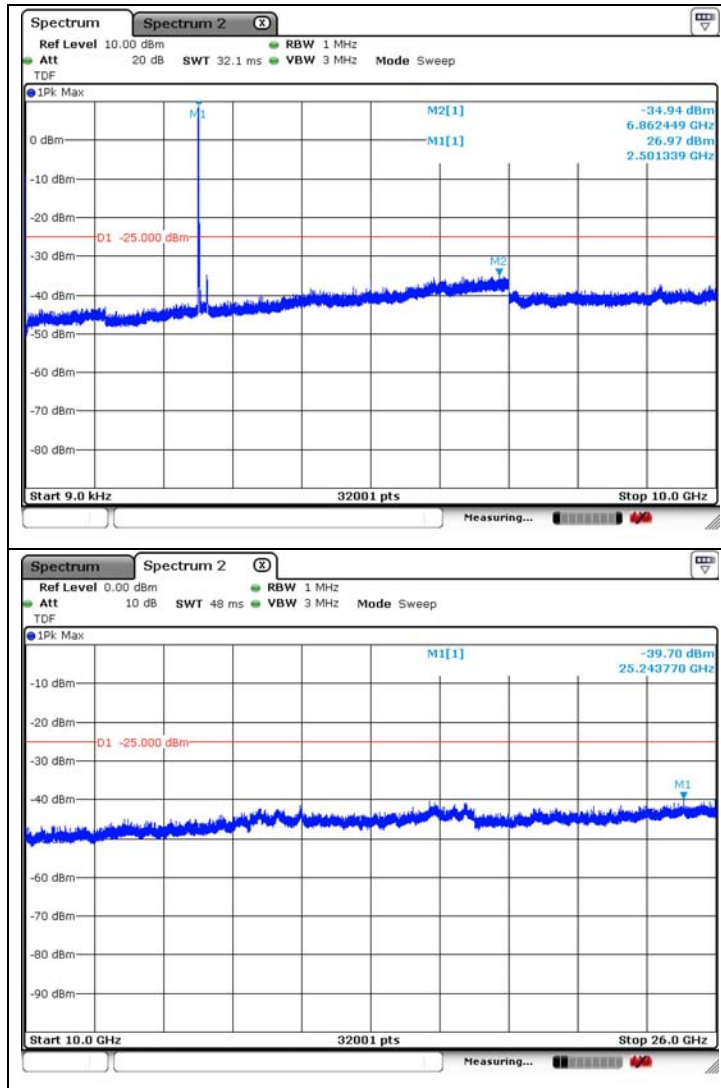

Middle Channel

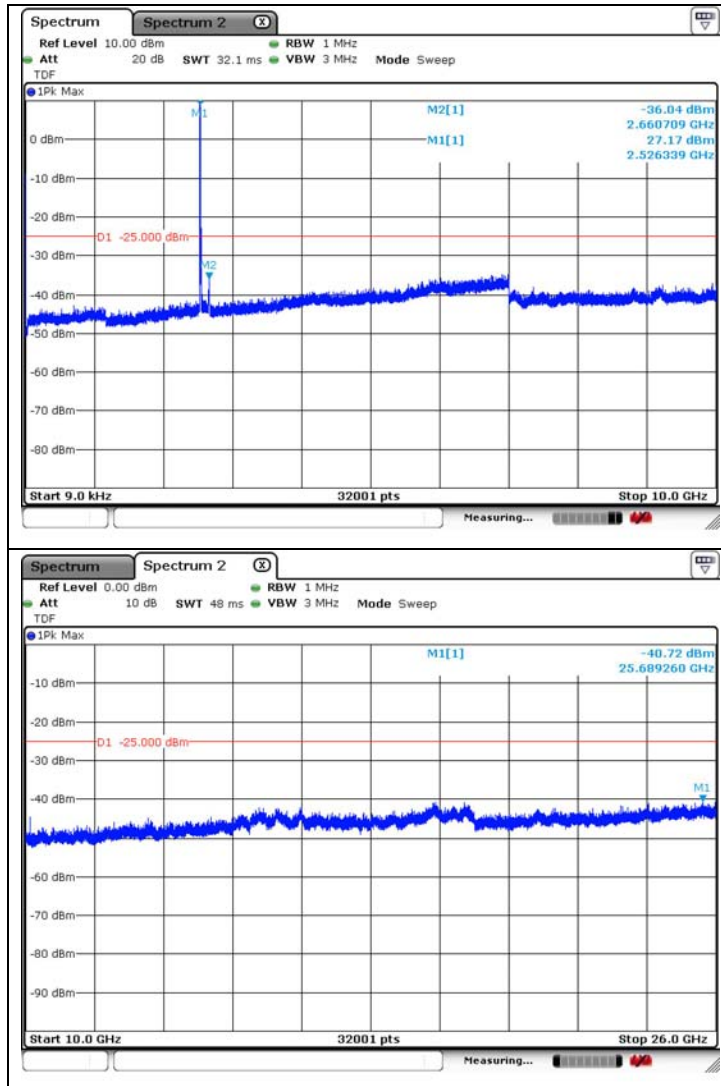


High Channel

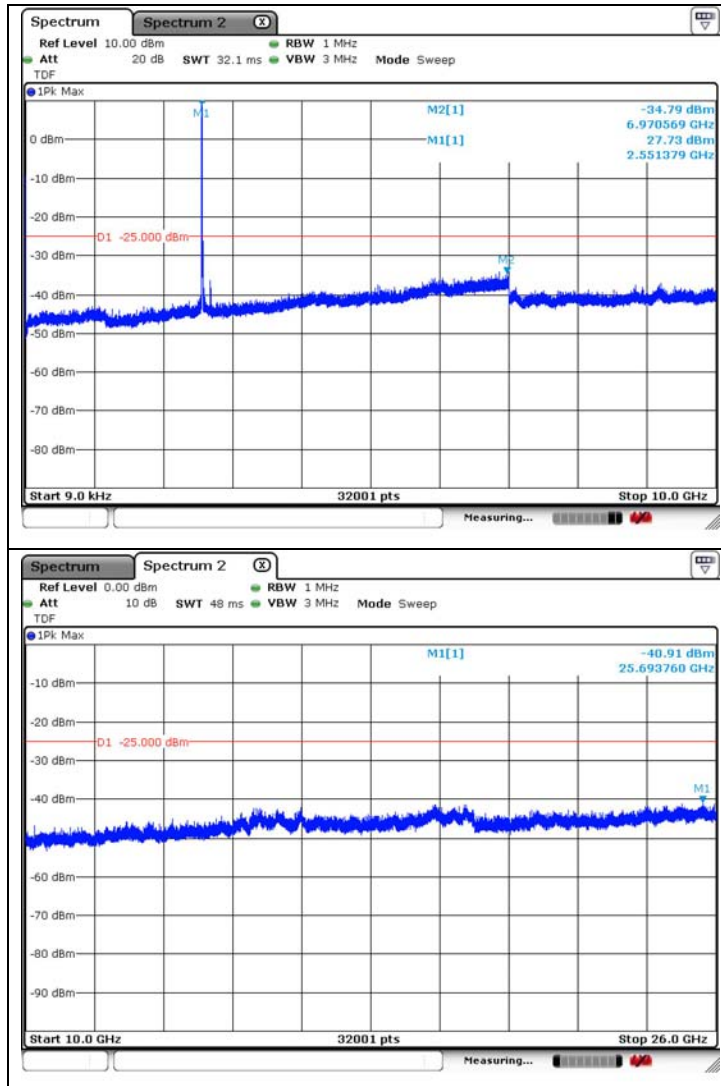


LTE band 12/17 (1.4 MHz – QPSK)


Low Channel

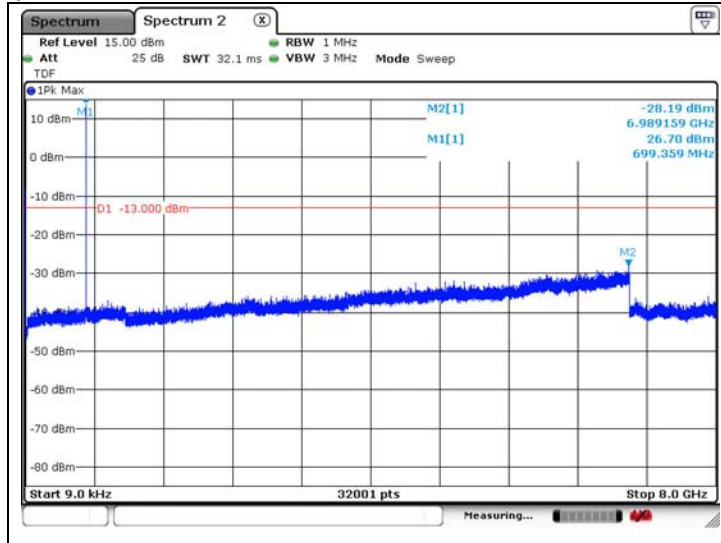

Middle Channel

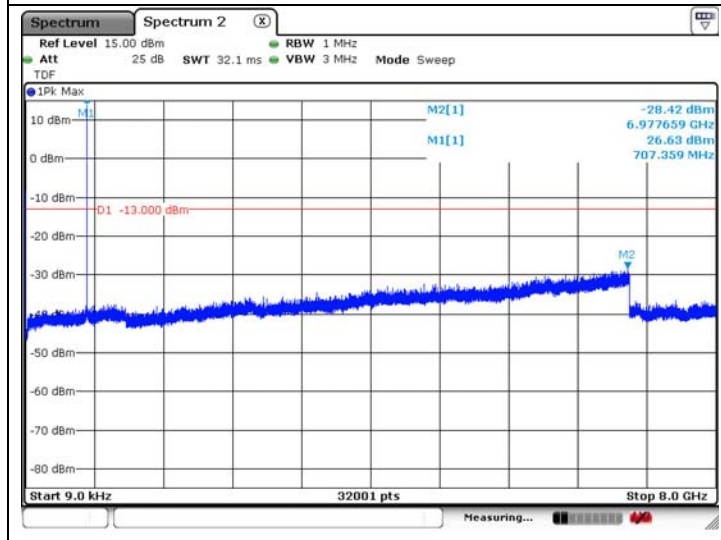


High Channel

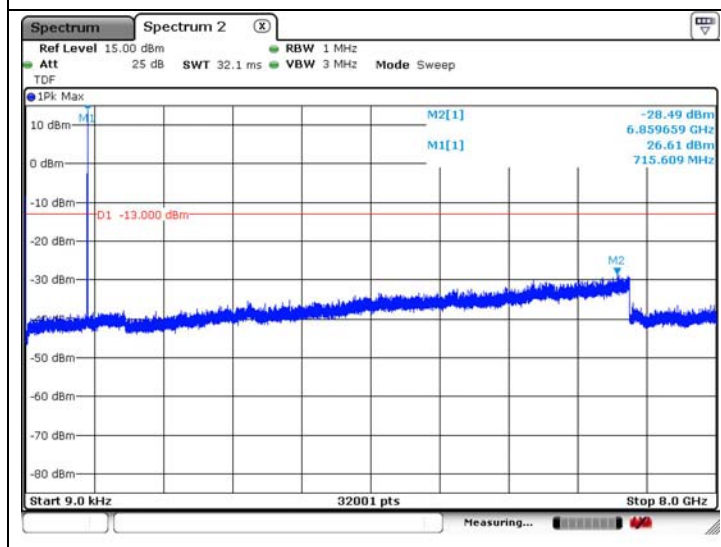


LTE band 12/17 (3 MHz – QPSK)


Low Channel

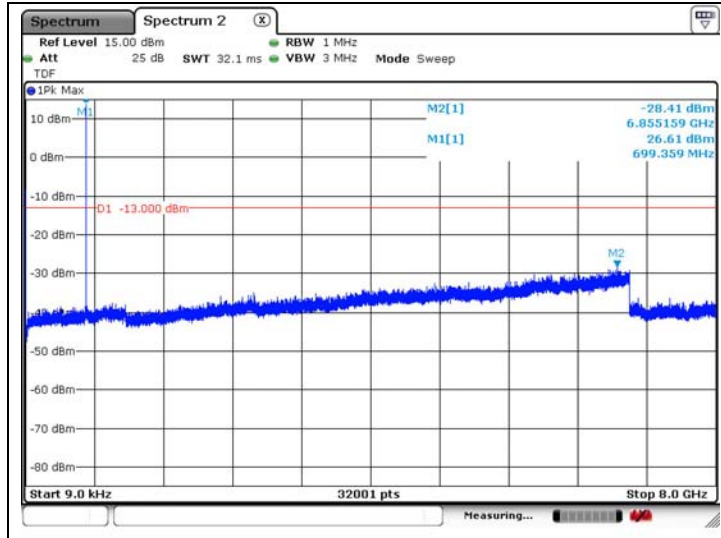

Middle Channel

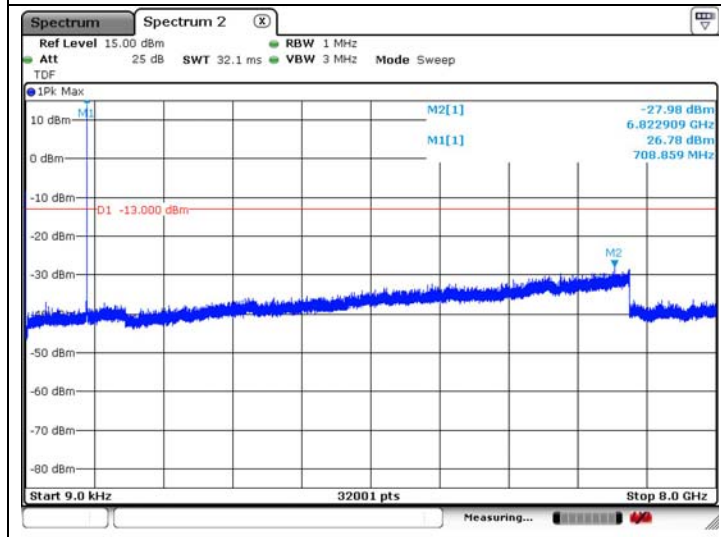


High Channel

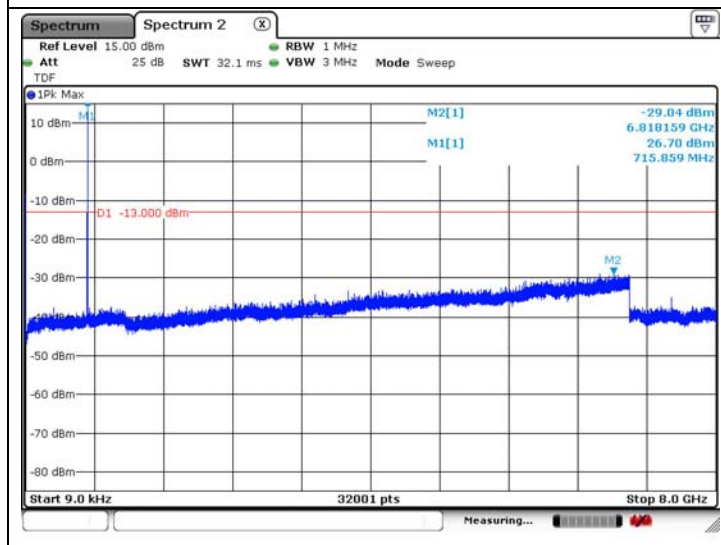


LTE band 12/17 (5 MHz – QPSK)


Low Channel

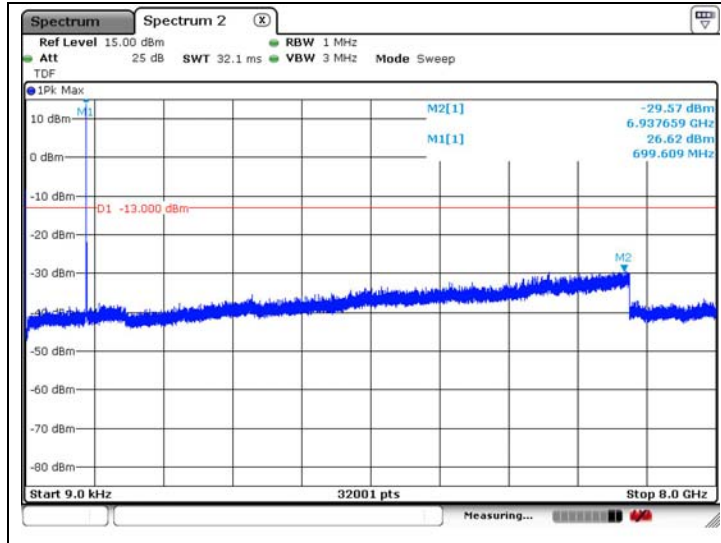

Middle Channel

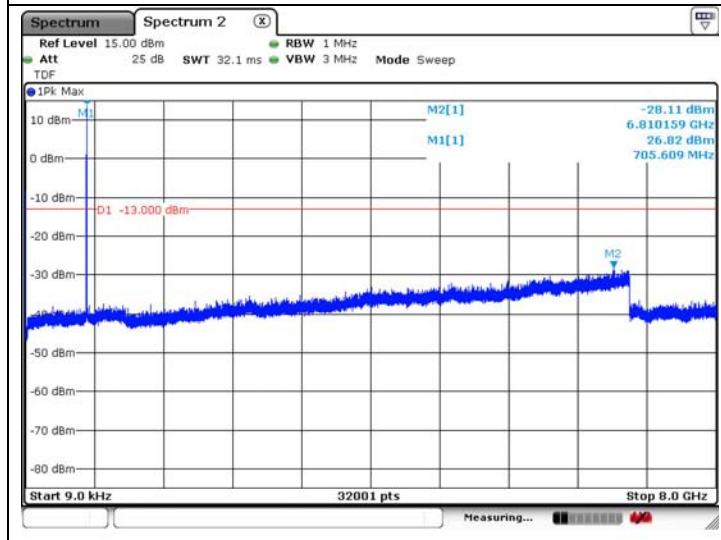


High Channel

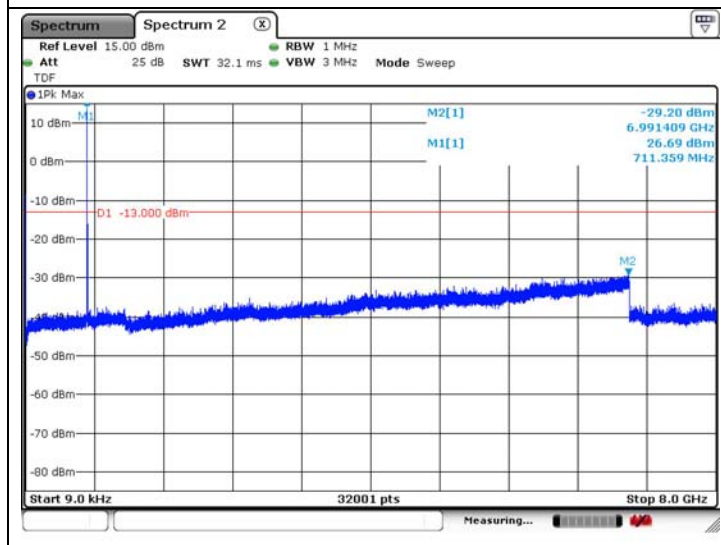


LTE band 12/17 (10 MHz – QPSK)


Low Channel

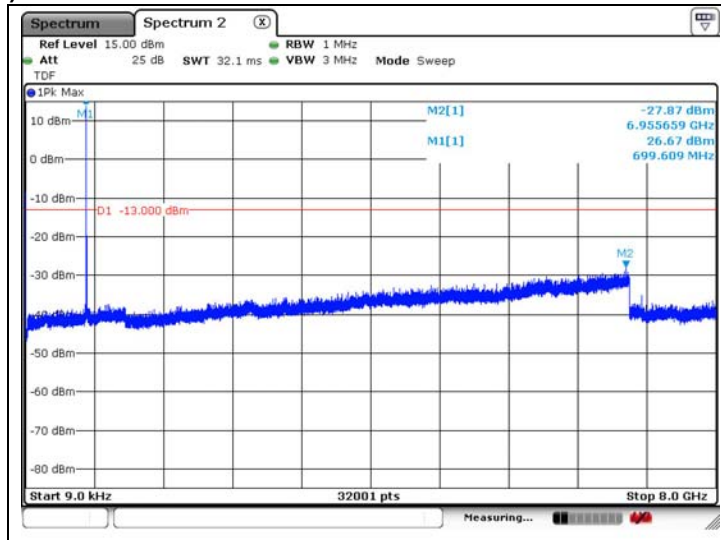


Middle Channel

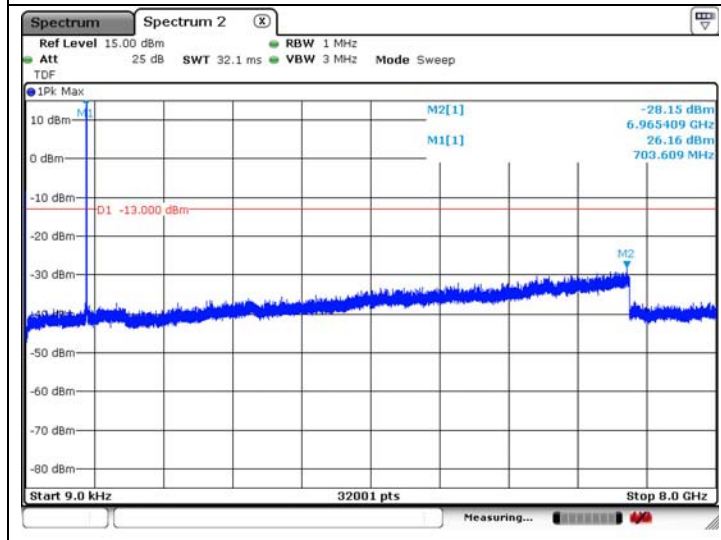


High Channel

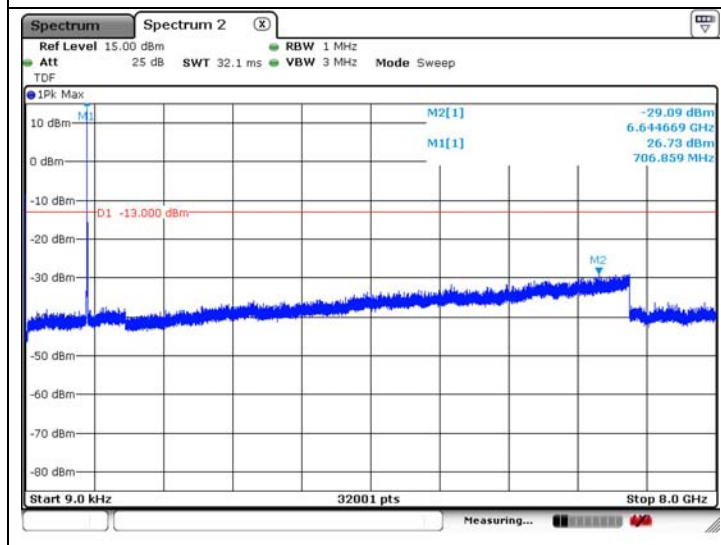


LTE band 13 (5 MHz – QPSK)
 Low Channel

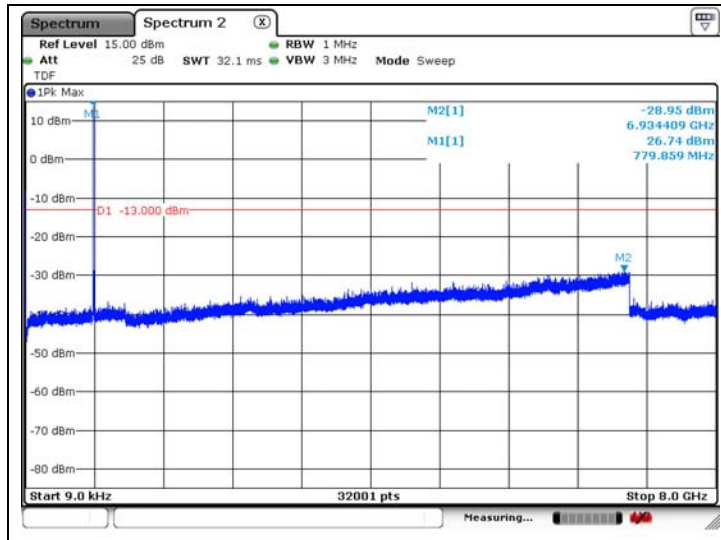

Middle Channel

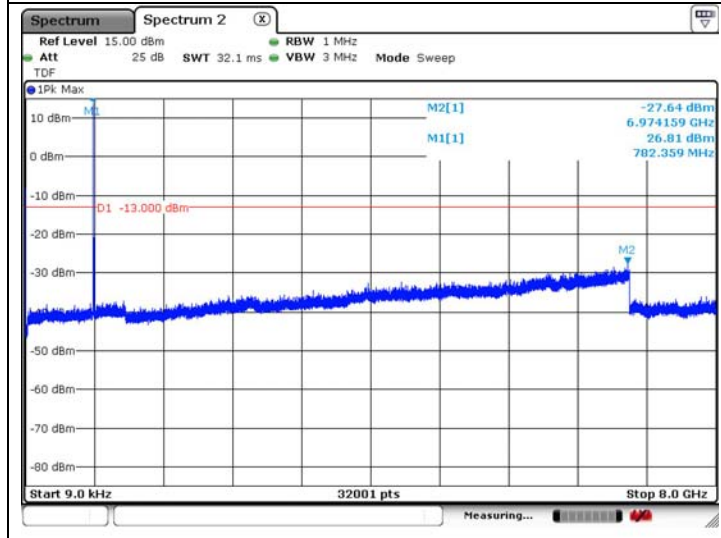

High Channel

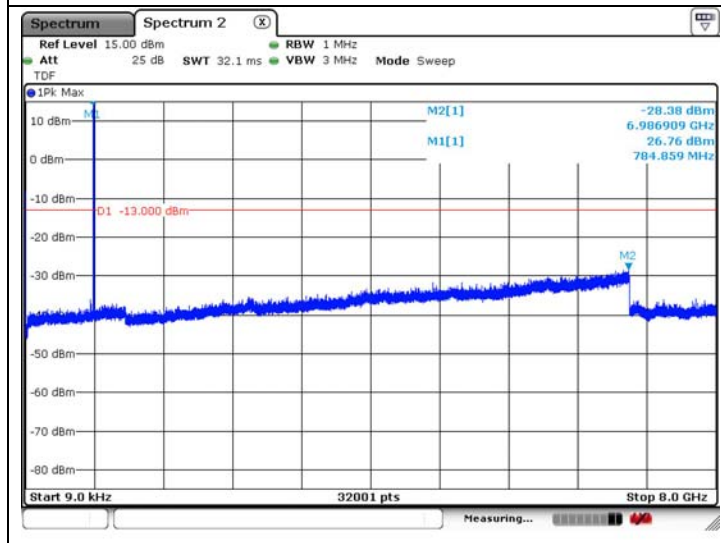

LTE band 13 (10 MHz – QPSK)
 Middle Channel

