



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue: January 14, 2010

Test Report No.: HCTE1001FE11

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJUN430

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment (EUT) Type : Cellular/AWS/PCS CDMA Phone with Bluetooth

Trade Name / Model(s) : LG Electronics Inc. / UN430

Additional Model(s) : LW430, MN430, AN430

Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Gyeong Seon Kim
Test Engineer of EMC Tech. Part

Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology	5
1.7 Test facility	5
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	6
3. PRELIMINARY TEST	
3.1 Conducted Emission test	7
3.2 Radiated Emission test	7
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	8
4.2 Radiated Emission test	13
5. FIELD STRENGTH CALCULATION	14
6. TEST EQUIPMENT	15
7. CONCLUSION	16

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The **LG Electronics Inc. Model: UN430, Cellular/AWS/PCS CDMA Phone with Bluetooth.**

Its basic purpose is used for communications. It transmits from CDMA 850 (824.70 MHz to 848.31 MHz), CDMA 1 900 (1 851.25 MHz to 1 908.75 MHz) AWS CDMA (1 711.25 MHz to 1 753.75 MHz) and receives from CDMA 850 (869.70 MHz to 893.31 MHz) CDMA 1 900 (1 931.25 MHz to 1 988.75 MHz), AWS CDMA (2 111.25 MHz to 2 153.75 MHz).

Model	UN430
Additional Model	LW430, MN430, AN430
FCC ID	BEJUN430
E.U.T Type	Cellular/AWS/PCS CDMA Phone with Bluetooth
TX Frequency	824.70 MHz to 848.31 MHz (CDMA 850) 1 851.25 MHz to 1 908.75 MHz (CDMA 1 900) 1 711.25 MHz to 1 753.75 MHz (AWS CDMA)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA 850) 1 931.25 MHz to 1 988.75 MHz (CDMA 1 900) 2 111.25 MHz to 2 153.75 MHz (AWS CDMA)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/AWS/PCS CDMA Phone with Bluetooth	LG	UN430	BEJUN430	Notebook PC
Notebook PC	Sam-Sung	NT-R519	DoC	E.U.T
Notebook PC adaptor	DELTA	ADP-60ZH D AD-6019R	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC
Headset	-	-	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/AWS/PCS CDMA Phone with Bluetooth	Headset jack	-	-	(D)1.0
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/AWS/PCS CDMA Phone with Bluetooth	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

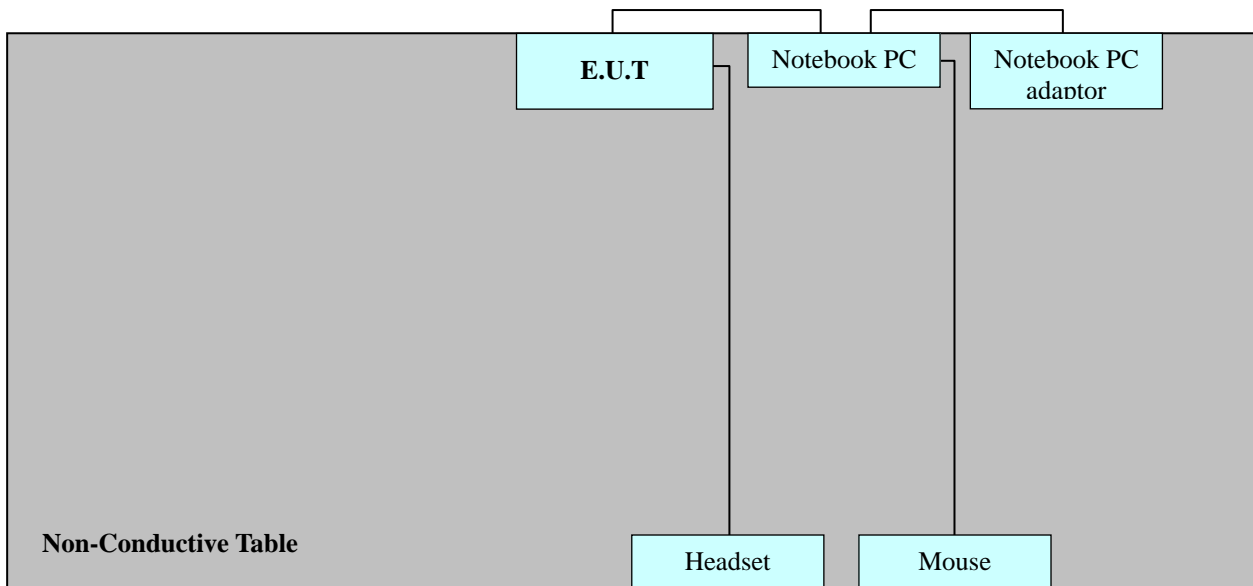

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	<input type="radio"/>

3. 2 Radiated Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	<input type="radio"/>

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 7.3 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 20.8 °C
Humidity level	: 38.7 %
Test date	: January 13, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.5480	47.2	NEUTRAL	Quasi-Peak	56.0	8.8
0.5920	35.6	NEUTRAL	Average	46.0	10.4
0.6400	48.7	HOT	Quasi-Peak	56.0	7.3
0.6600	37.6	HOT	Average	46.0	8.4

※ **NOTE:** Refer to page 9 to page 12 for details.

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. Line H = Hot, Line N = Neutral


HCT

EMC TEST LAB.

EUT : UN430
 Manufacturer : LG
 Operating Condition : DATA COMMUNICATION MODE
 Test Site : SHIELD ROOM
 Operator : GS KIM
 Test Specification : CISPR 22 CLASS B
 Comment : H

SCAN TABLE: "EN 55022 CLASS B"

Short Description: EN 55022 Voltage
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 500.0 kHz 5.0 kHz MaxPeak 10.0 ms 9 kHz None
 Average
 500.0 kHz 30.0 MHz 3.0 kHz MaxPeak 10.0 ms 9 kHz None
 Average

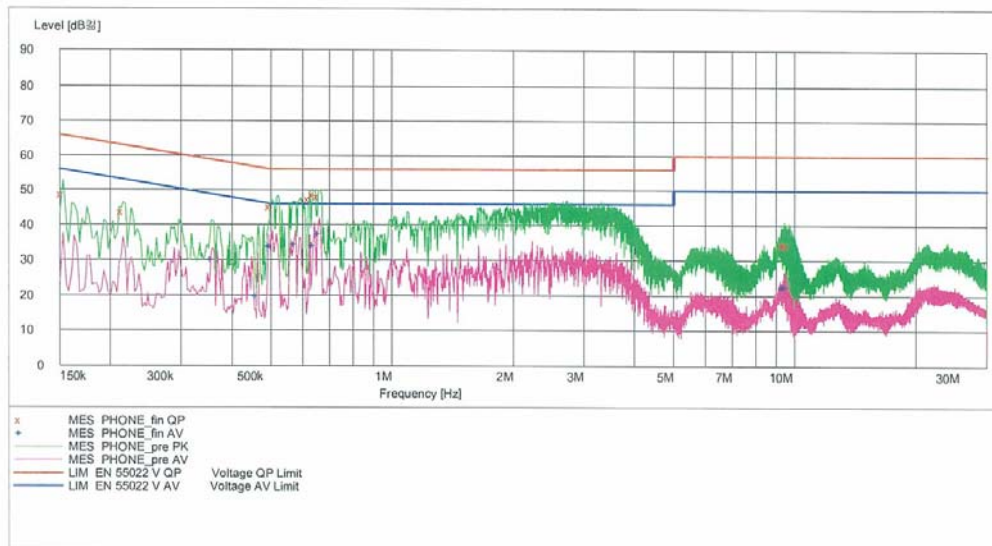

MEASUREMENT RESULT: "PHONE_fin QP"

2010-01-13 7:46

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.152501	48.80	10.1	66	17.0	---	---
0.215001	43.80	10.1	63	19.2	---	---
0.500000	45.30	10.2	56	10.7	---	---
0.624000	47.40	10.2	56	8.6	---	---
0.640000	48.70	10.2	56	7.3	---	---
0.660000	48.20	10.2	56	7.8	---	---
9.428001	34.60	11.1	60	25.4	---	---
9.500001	34.60	11.2	60	25.4	---	---
9.676001	34.40	11.2	60	25.6	---	---

2010-01-13 7:46

HCT EMC LAB

MEASUREMENT RESULT: "PHONE_fin AV"

2010-01-13 7:46

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.357501	30.20	10.1	49	18.6	---	---
0.462501	19.70	10.2	47	27.0	---	---
0.500000	33.90	10.2	46	12.1	---	---
0.576000	34.50	10.2	46	11.5	---	---
0.640000	34.10	10.2	46	11.9	---	---
0.660000	37.60	10.2	46	8.4	---	---
9.384001	22.30	11.1	50	27.7	---	---
9.476001	22.60	11.2	50	27.4	---	---
9.544001	22.60	11.2	50	27.4	---	---

2010-01-13 7:46

HCT EMC LAB


HCT

EMC TEST LAB.

EUT : UN430
 Manufacturer : LG
 Operating Condition : DATA COMMUNICATIO MODE
 Test Site : SHIELD ROOM
 Operator : GS KIM
 Test Specification : CISPR 22 CLASS B
 Comment : N

SCAN TABLE: "EN 55022 CLASS B"

Short Description: EN 55022 Voltage
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 500.0 kHz 5.0 kHz MaxPeak 10.0 ms 9 kHz None
 Average
 500.0 kHz 30.0 MHz 3.0 kHz MaxPeak 10.0 ms 9 kHz None
 Average

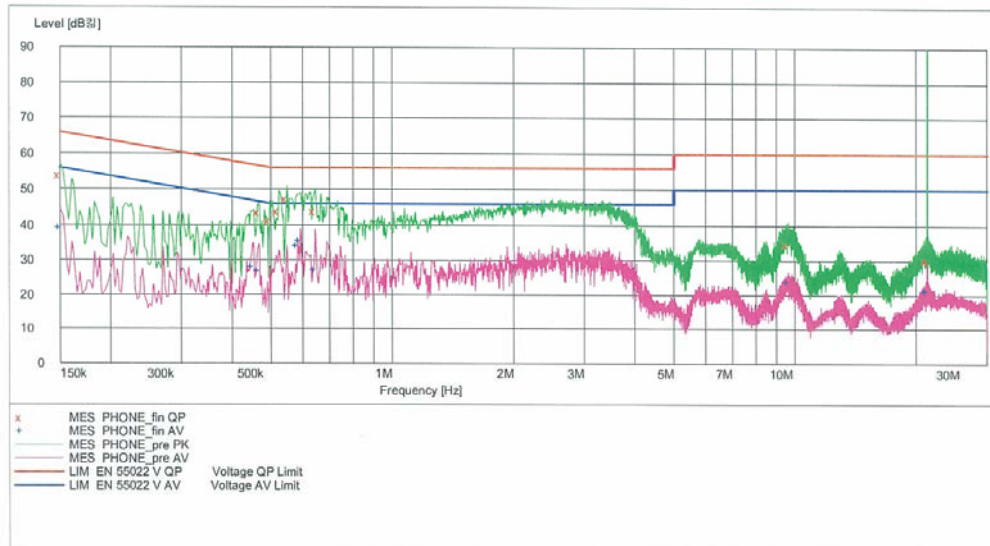

MEASUREMENT RESULT: "PHONE_fin_QP"

2010-01-13 7:49

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	53.90	10.1	66	12.1	---	---
0.467501	43.70	10.2	57	12.8	---	---
0.497501	41.30	10.2	56	14.8	---	---
0.524000	44.00	10.2	56	12.0	---	---
0.548000	47.20	10.2	56	8.8	---	---
0.644000	43.90	10.2	56	12.1	---	---
9.620001	34.70	11.2	60	25.3	---	---
21.336001	30.20	12.5	60	29.8	---	---
21.352001	30.40	12.5	60	29.6	---	---

2010-01-13 7:50 HCT EMC LAB

MEASUREMENT RESULT: "PHONE_fin AV"

2010-01-13 7:49

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.150001	39.40	10.1	56	16.6	---	---
0.450001	28.20	10.2	47	18.7	---	---
0.467501	27.00	10.2	47	19.6	---	---
0.584000	34.10	10.2	46	11.9	---	---
0.592000	35.60	10.2	46	10.4	---	---
0.644000	27.30	10.2	46	18.7	---	---
9.632001	24.00	11.2	50	26.0	---	---
21.336001	21.20	12.5	50	28.8	---	---
21.352001	21.40	12.5	50	28.6	---	---

2010-01-13 7:50 HCT EMC LAB

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 5.3 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 10.0 °C
Humidity level	: 60.5 %
Test date	: January 13, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
49.0	16.8	12.6	0.7	V	30.1	40.0	9.9
175.0	15.8	11.8	1.4	V	29.0	43.5	14.5
176.2	16.8	11.8	1.4	H	30.0	43.5	13.5
420.0	4.0	15.9	2.2	V	22.1	46.0	23.9
435.0	13.0	16.2	2.2	V	31.4	46.0	14.6
797.0	15.4	22.2	3.1	V	40.7	46.0	5.3

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
<input type="checkbox"/> LISN	Rohde & Schwarz	ENV216	2010.04.01
<input checked="" type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
<u>Radiated Emission</u>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
<input checked="" type="checkbox"/> Antenna Master	HD	MA240	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060	-
<input type="checkbox"/> Communication Antenna	TDK	LPDA-0802	-
<input type="checkbox"/> Antenna Position Tower	HD	240/520/00	-
<input type="checkbox"/> Base Station	Rohde & Schwarz	CMU 200	2010.02.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
<input checked="" type="checkbox"/> RF-Amplifier	MITEQ	AMF-6D-00101800-35. 20P.PS	2010.04.25
<input type="checkbox"/> Bluetooth Base Station	TESCOM	TC-3000A	2011.01.07

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: UN430. Cellular/AWS/PCS CDMA Phone with Bluetooth. FCC ID: BEJUN430** complies with §15.107 and §15.109 of the FCC rules.