

**HCT CO., LTD.**



PRODUCT COMPLIANCE DIVISION  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA  
TEL : +82 31 639 8539 FAX : +82 31 639 8525 [www.hct.co.kr](http://www.hct.co.kr)

## EMI CERTIFICATION REPORT

**LG Electronics Inc.**

**60-39, Gasan-dong, Gumchon-gu,  
Seoul, 153-023, Korea**

**Date of Issue: December 14, 2009**

**Test Report No.: HCTE0912FE16**

**Test Site: HCT CO., LTD.**

**HCT FRN: 0005-8664-21**

**FCC ID:**

**BEJVX8370**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B  
Equipment (EUT) Type : Cellular / PCS CDMA Phone with Bluetooth  
Trade Name / Model(s) : LG Electronics Inc. / VX8370  
Addition Model(s) : LG-VX8370  
Port / Connector(s) : USB Data Port / Headset Port  
Application Type : Class II Permissive Change

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

**Report prepared by**  
**: Gyeong Seon Kim**  
**Test Engineer of EMC Tech. Part**

**Approved by**  
**: Jin Pyo Hong**  
**Manager of EMC Tech. Part**

**TABLE OF CONTENTS**

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable) .....	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	8
4.1 Conducted Emission test.....	8
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

**ATTACHMENT : TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

### 1.1 Product Description

The **LG Electronics Inc. Model: VX8370, Cellular/PCS CDMA Phone with Bluetooth.**

It's basic purpose is used for communications. It transmits from CDMA 850 (824.70 MHz to 848.31 MHz), CDMA 1 900 (1 850.00 MHz to 1 910.20 MHz) and receives from CDMA 850 (869.70 MHz to 893.31 MHz), CDMA 1 900 (1 930.00 MHz to 1 990.00 MHz).

<b>Model</b>	VX8370
<b>Addition Model</b>	LG-VX8370
<b>FCC ID</b>	BEJVX8370
<b>E.U.T Type</b>	Cellular/PCS CDMA Phone with Bluetooth
<b>TX Frequency</b>	824.70 MHz to 848.31 MHz (CDMA 850) 1 850.00 MHz to 1 910.20 MHz (CDMA 1 900)
<b>RX Frequency</b>	869.70 MHz to 893.31 MHz (CDMA 850) 1 930.00 MHz to 1 990.00 MHz (CDMA 1 900)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/PCS CDMA Phone with Bluetooth	LG	VX8370	BEJVX8370	Notebook PC
Notebook PC	HP	Compaq6730b	DoC	E.U.T
Notebook PC adaptor	Hipro Electronics	PPP014Y-S	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC
Headset	-	-	-	-

### 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/PCS CDMA Phone with Bluetooth	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

\* The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS CDMA Phone with Bluetooth	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

## **1.6 Test Methodology**

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

## **1.7 Test Facility**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

## **1.8 Frequency Range of Radiated Measurements**

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

<b>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</b>	<b>Upper frequency of measurement range (MHz)</b>
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower


## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

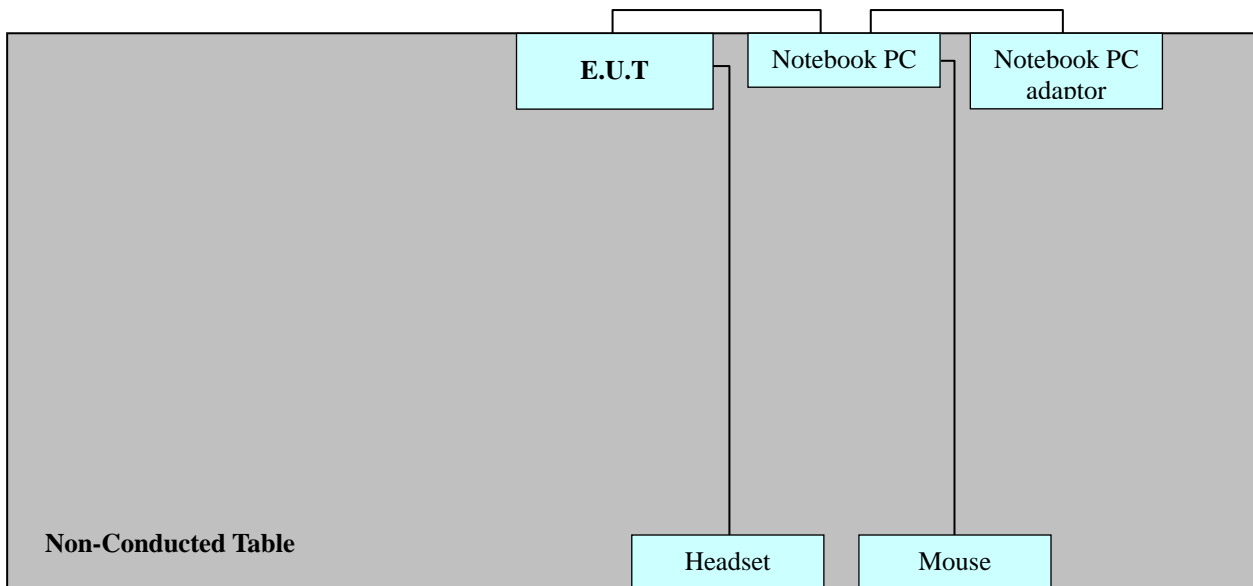

Power Line: 110 VAC

### 3. PRELIMINARY TEST

#### 3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

#### 3.2 Radiated Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 5.3 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 23.1 °C
Humidity level	: 39.4 %
Test date	: December 11, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB $\mu$ V)	Conductor	Result	Limit (dB $\mu$ V)	Margin (dB)
0.7200	44.0	HOT	Quasi-Peak	56.0	12.0
0.7280	40.7	HOT	Average	46.0	5.3
0.1501	55.2	NEUTRAL	Quasi-Peak	66.0	10.8
0.7320	40.4	NEUTRAL	Average	46.0	5.6

\* **Note:** Refer to page 9 to page 11 for details.


**HCT**

**EMC**

EUT: VX8370  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GS-KIM  
 Test Specification: CISPR22 CLASS B  
 Comment: H

**SCAN TABLE: "EN 55022 Voltage"**

Short Description:		EN 55022 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

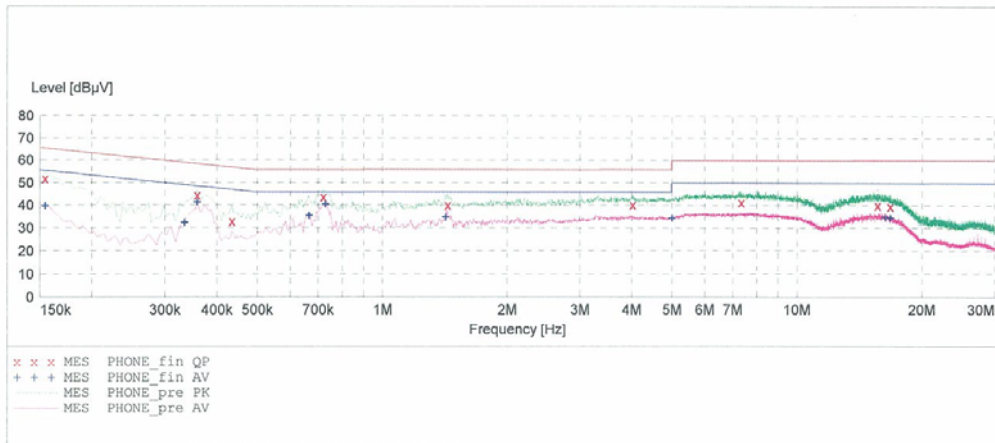

**MEASUREMENT RESULT: "PHONE\_fin QP"**

12/11/2009 2:36PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.154100	52.20	10.0	66	13.6	1	---
0.358100	44.80	10.0	59	13.9	1	---
0.434100	33.20	10.0	57	24.0	1	---
0.720000	44.00	10.1	56	12.0	1	---
1.436000	40.30	10.1	56	15.7	1	---
4.020000	40.40	10.3	56	15.6	1	---
7.348000	41.50	10.5	60	18.5	1	---
15.624000	40.30	11.3	60	19.7	1	---
16.764000	39.80	11.3	60	20.2	1	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

12/11/2009 2:36PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.154100	40.10	10.0	56	15.6	1	---
0.334100	32.70	10.1	49	16.6	1	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

(continued)

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.358100	41.70	10.0	49	7.1	1	---
0.664000	35.70	10.1	46	10.3	1	---
0.728000	40.70	10.1	46	5.3	1	---
1.420000	34.90	10.1	46	11.1	1	---
5.000000	34.50	10.3	46	11.5	1	---
16.288000	34.90	11.3	50	15.1	1	---
16.760000	34.70	11.3	50	15.3	1	---


**HCT**

**EMC**

EUT: VX8370  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GS-KIM  
 Test Specification: CISPR22 CLASS B  
 Comment: N

**SCAN TABLE: "EN 55022 Voltage"**

Short Description:		EN 55022 Voltage					
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

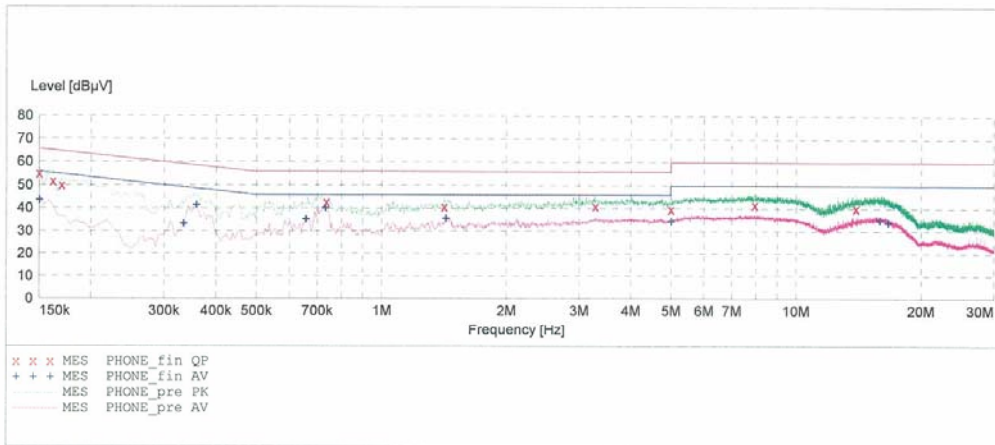

**MEASUREMENT RESULT: "PHONE\_fin QP"**

12/11/2009 2:41PM

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.150100	55.20	10.0	66	10.8	1	---
0.162100	51.80	10.0	65	13.5	1	---
0.170100	50.20	10.0	65	14.7	1	---
0.736000	42.90	10.1	56	13.1	1	---
1.416000	40.70	10.1	56	15.3	1	---
3.280000	41.00	10.2	56	15.0	1	---
5.000000	39.80	10.3	56	16.2	1	---
7.944000	41.70	10.6	60	18.3	1	---
13.924000	40.30	11.1	60	19.7	1	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

12/11/2009 2:41PM

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.150100	43.80	10.0	56	12.2	1	---
0.334100	33.40	10.1	49	15.9	1	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.358100	41.60	10.0	49	7.2	1	---
0.656000	35.50	10.1	46	10.5	1	---
0.732000	40.40	10.1	46	5.6	1	---
1.428000	35.90	10.1	46	10.1	1	---
5.000000	34.70	10.3	46	11.3	1	---
15.876000	35.30	11.3	50	14.7	1	---
16.660000	34.20	11.3	50	15.8	1	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 Subpart B  
 Result : Passed by 11.0 dB  
 Operating condition : Data Communication mode  
 Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)  
 Temperature : 12.0 °C  
 Humidity level : 55.0 %  
 Test date : December 11, 2009

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
Mhz	dB $\mu$ V	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
42.9	13.0	12.3	0.7	V	26.0	40.0	14.0
130.9	18.2	11.6	1.2	V	31.0	43.5	12.5
231.6	17.5	10.9	1.6	V	30.0	46.0	16.0
272.9	11.0	12.2	1.8	V	25.0	46.0	21.0
343.9	11.2	13.9	1.9	V	27.0	46.0	19.0
482.0	15.6	17.0	2.4	V	35.0	46.0	11.0

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
<input type="checkbox"/> LISN	Rohde & Schwarz	ENV216	2010.04.01
<input checked="" type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
<b><u>Radiated Emission</u></b>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
<input checked="" type="checkbox"/> Antenna Master	HD	MA240	
<input type="checkbox"/> Communication Antenna	TDK	LPDA-0802	-
<input type="checkbox"/> Antenna Position Tower	HD	240/520/00	-
<input type="checkbox"/> Base Station	Rohde & Schwarz	CMU 200	2010.02.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
<input checked="" type="checkbox"/> RF-Amplifier	MITEQ	AMF-6D-00101800-35. 20P.PS	2010.04.25
<input type="checkbox"/> Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

## **7. CONCLUSION**

The data collected shows that the **LG Electronics Inc. Model: VX8370. Cellular/PCS CDMA Phone with Bluetooth. FCC ID: BEJVX8370** complies with §15.107 and §15.109 of the FCC rules.