

APPLICATION FOR CERTIFICATION

On Behalf of

LG Electronics Inc.

Wi-Fi module

Model No. : WN8122E1

FCC ID : BEJWN8122E1

IC: 2703H-WN8122E1

Brand : LG

Prepared for : LG Electronics Inc.
19-1, Cheongho-Ri, Jinwuy-Myeon,
Pyeongtaek-City, Gyeonggi-Do, 451-713,
Korea

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1208112
Report Number : EM-F1010669
Date of Test : Jul. 14 ~ Aug. 21, 2012
Date of Report : Aug. 22, 2012

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Data Rate Relative to Output Power.....	6
1.3. Test Configuration for Each Test Item	8
1.4. Tested Supporting System Details.....	8
1.5. Description of Test Facility	8
1.6. Measurement Uncertainty.....	9
2. CONDUCTED EMISSION MEASUREMENT.....	10
2.1. Test Equipment.....	10
2.2. Block Diagram of Test Setup.....	10
2.3. Powerline Conducted Emission Limit §15.207, Class B, RSS-Gen §7.2.2/Table 2]	10
2.4. Operating Condition of EUT	11
2.5. Test Procedure	11
2.6. Conducted Emission Measurement Results.....	11
3. RADIATED EMISSION MEASUREMENT	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2).....	16
3.4. Operating Condition of EUT	16
3.5. Test Procedure	17
3.6. Test Results.....	18
4. 6dB BANDWIDTH MEASUREMENT	51
4.1. Test Equipment.....	51
4.2. Block Diagram of Test Setup.....	51
4.3. Specification Limits [§15.247(a)(2), RSS-210 §A8.2 (a)]	51
4.4. Operating Condition of EUT	51
4.5. Test Procedure	51
4.6. Test Results.....	52
5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	63
5.1. Test Equipment.....	63
5.2. Block Diagram of Test Setup.....	63
5.3. Specification Limits (§15.247(b)-(3)).....	63
5.4. Operating Condition of EUT	63
5.5. Test Procedure	63
5.6. Test Results.....	64
6. EMISSION LIMITATIONS MEASUREMENT.....	65
7. BAND EDGES MEASUREMENT.....	66
7.1. Test Equipment.....	66
7.2. Block Diagram of Test Setup.....	66
7.3. Specification Limits [§15.247(c), RSS-210 §A8.5].....	66
7.4. Operating Condition of EUT	66
7.5. Test Procedure	66
7.6. Test Results.....	67
8. POWER SPECTRAL DENSITY MEASUREMENT	75
8.1. Test Equipment.....	75
8.2. Block Diagram of Test Setup.....	75

8.3. Specification Limits [§15.247(d), RSS-210 §A8.2 (b)]..... 75

8.4. Operating Condition of EUT 75

8.5. Test Procedure 75

8.6. Test Results..... 76

9. DEVIATION TO TEST SPECIFICATIONS..... 87

10. PHOTOGRAPHS..... 88

10.1. Photos of Conducted Disturbance Measurement 88

10.2. Photos of Radiated Measurement at Semi-Anechoic Chamber 89

10.3. Photo of Section RF Conducted Measurement 90

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacturer : Compal Networking (Kunshan) Co., Ltd.
EUT Description : Wi-Fi module
FCC ID : **BEJWN8122E1**
IC : **2703H-WN8122E1**
(A) Model No. : WN8122E1
(B) Serial No. : N/A
(C) Brand : LG
(D) Power Supply : DC 5V (Powered by Notebook PC)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C, Oct. 2010
Industry Canada Rules and Regulations RSS-Gen (Issue 2), December 2010 and
RSS-210 (Issue 8), December 2010
(Canada RSS-210 §Annex 8)
And ANSI C63.4:2003

(FCC 47 CFR Part 15C, §15.205 and §15.207 and §15.209 and §15.247)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C and Canada RSS-Gen, RSS-210 limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the requirements of FCC and Industry Canada RSS-Gen, RSS-210 standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test: Jul. 14 ~ Aug. 21, 2012

Date of Report: Aug. 22, 2012

Producer: 
(Tina Huang/Administrator)

Signatory: 
(Leon Liu/Deputy General Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	<p>Wi-Fi module</p> <p>The frequency range of 2400MHz ~ 2483.5MHz、 5725MHz ~ 5850MHz was tested in this report.</p> <p>The frequency range 5150 ~ 5250MHz has been tested and the test data are reported in other report of EM-F1010670.</p>
Model Number	:	WN8122E1
Serial Number	:	N/A
Brand	:	LG
FCC ID	:	BEJWN8122E1
IC	:	2703H-WN8122E1
Applicant	:	<p>LG Electronics Inc.</p> <p>19-1, Cheongho-Ri, Jinwuy-Myeon, Pyeongtaek-City, Gyeonggi-Do, 451-713, Korea</p>
Manufacturer	:	<p>Compal Networking (Kunshan) Co., Ltd.</p> <p>No.520, Nanbang Rd., Economic & Technical Development Zone, Kunshan, Jiangsu Province, China.</p>
Fundamental Range	:	<p>2412MHz ~ 2462MHz and</p> <p>5180MHz ~ 5240MHz and</p> <p>5745MHz ~ 5825MHz</p>
Radio Technology	:	<p>802.11b: DSSS Modulation (DBPSK/DQPSK/CCK)</p> <p>802.11a/g/n-HT20/n-HT40: OFDM Modulation 2T2R, (BPSK/QPSK/16QAM/64QAM)</p>
Data Transfer Rate	:	<p>802.11b: 1/2/5.5/11Mbps</p> <p>802.11a/g: 6/9/12/18/24/48/54Mbps</p> <p>802.11n: up to 300Mbps</p>
Antenna Gain	:	<p>2.4GHz: -0.68dBi (Peak)</p> <p>5.8GHz: 0.62dBi (Peak)</p>

Date of Receipt of Sample : Aug. 04, 2012

Date of Test : Jul. 14 ~ Aug. 21, 2012

Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Peak Gain W/ Cable loss (dBi)	
			Frequency (MHz)	Max Gain (dBi)
Ant./120800003400J	arcadyan	MIFA Antenna	2.4GHz	-0.91dBi (peak)
			2.45GHz	-0.79dBi (peak)
			2.5GHz	-0.68dBi (peak)
			5.15GHz	0.47dBi (peak)
			5.25GHz	0.54dBi (peak)
			5.35GHz	0.12dBi (peak)
			5.47GHz	-0.84dBi (peak)
			5.725GHz	0.00dBi (peak)
			5.85GHz	0.52dBi (peak)
Inner Ant./120800003500J	arcadyan	MIFA Antenna	2.4GHz	-1.46dBi (peak)
			2.45GHz	-1.54dBi (peak)
			2.5GHz	-1.29dBi (peak)
			5.15GHz	0.62dBi (peak)
			5.25GHz	0.57dBi (peak)
			5.35GHz	0.50dBi (peak)
			5.47GHz	-0.18dBi (peak)
			5.725GHz	-0.77dBi (peak)
			5.85GHz	-0.51dBi (peak)

1.2. Data Rate Relative to Output Power

802.11b			
Channel	Modulation	Date Rate(Mbps)	Power(dBm)
1	DBPSK	1	17.81
1	DQPSK	2	17.69
1	CCK	5.5	17.77
1	CCK	11	17.42

802.11g				802.11a			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)	Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	6	14.15	149	BPSK	6	19.42
1	BPSK	9	14.09	149	BPSK	9	19.37
1	QPSK	12	14.11	149	QPSK	12	19.33
1	QPSK	18	14.03	149	QPSK	18	19.28
1	16-QAM	24	13.81	149	16-QAM	24	19.40
1	16-QAM	36	13.93	149	16-QAM	36	19.28
1	64-QAM	48	13.98	149	64-QAM	48	19.32
1	64-QAM	54	14.01	149	64-QAM	54	19.39

802.11n-HT20				802.11n-HT20			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)	Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	6.5	12.94	149	BPSK	6.5	19.36
1	QPSK	13	12.87	149	QPSK	13	19.22
1	QPSK	19.5	12.85	149	QPSK	19.5	19.24
1	16-QAM	26	12.91	149	16-QAM	26	19.27
1	16-QAM	39	12.75	149	16-QAM	39	19.24
1	64-QAM	52	12.79	149	64-QAM	52	19.28
1	64-QAM	58.6	12.84	149	64-QAM	58.6	19.30
1	64-QAM	65	12.80	149	64-QAM	65	19.32

802.11g-HT40				802.11g-HT40			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)	Channel	Modulation	Date Rate (Mbps)	Power (dBm)
3	BPSK	13.5	13.84	151	BPSK	13.5	19.54
3	QPSK	27	13.71	151	QPSK	27	19.50
3	QPSK	40.5	13.79	151	QPSK	40.5	19.47
3	16-QAM	54	13.81	151	16-QAM	54	19.51
3	16-QAM	81	13.77	151	16-QAM	81	19.49
3	64-QAM	108	13.69	151	64-QAM	108	19.47
3	64-QAM	121.5	13.75	151	64-QAM	121.5	19.43
3	64-QAM	135	13.73	151	64-QAM	135	19.51

1.3. Test Configuration for Each Test Item

Test Item	802.11b	802.11g	802.11n-HT20	802.11n-HT40
	Data Rate for Test(Mbps)			
6dB Bandwidth	1	6	6.5	13.5
Peak Power Spectral Density	1	6	6.5	13.5
Peak Output Power	1	6	6.5	13.5
Band Edge	1	6	6.5	13.5

1.4. Tested Supporting System Details

1.4.1. NOTEBOOK PC

Model Number : PP19S
 Serial Number : 8285
 FCC ID : MCLBCM92046
 BSMI ID : R33002
 Brand : DELL
 AC Adapter : M/N:AD6513
 DC Cord: Non-Shielded, Undetachable, 2.4m
 USB Cable : Non-Shielded, Detachable, 0.25m
 Power Cord : Non-Shielded, Detachable, 1.8m

1.5. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
 EMC Department
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan, R.O.C.

Test Site : **No. 1 Shielded Room &**
 (C1/Semi-AC) No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan, R.O.C.
Semi-Anechoic Chamber
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan, R.O.C.

May 14, 2009 Renewal on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conduction Test	150kHz~30MHz	±1.73dB
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.74dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dBm
Band edges	± 0.13dB
Power spectral density	± 0.13dB
Emission Limitations	± 0.13dB


2. CONDUCTED EMISSION MEASUREMENT

2.1. Test Equipment

The following test equipment was used during the conducted emission measurement :
(No. 1 Shielded Room)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCS30	100265	Aug. 25, 11'	Aug. 24, 12'
2.	A.M.N.	R&S	ENV4200	100169	May 04, 12'	May 03, 13'

2.2. Block Diagram of Test Setup

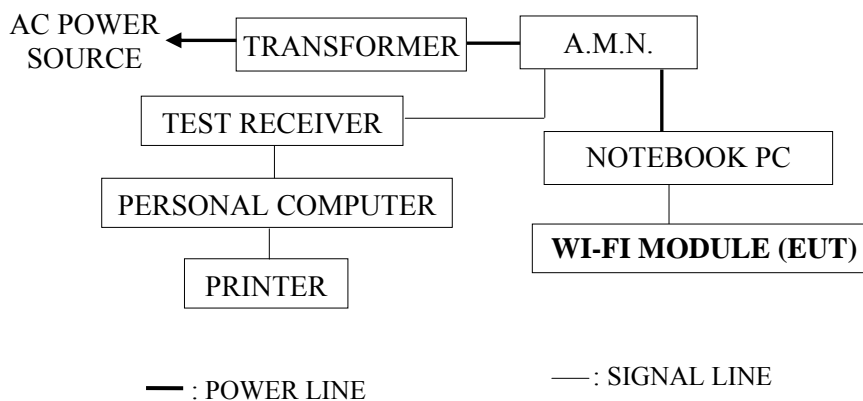

2.3. Powerline Conducted Emission Limit §15.207, Class B,

RSS-Gen §7.2.2/Table 2]

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2.: The lower limit applies at the band edges.

2.4. Operating Condition of EUT

- 2.4.1. Setup the EUT and simulator as shown on 2.2.
- 2.4.2. Turn on the power of all equipment.
- 2.4.3. The Notebook PC was running test software “Broadcom WL Command” to set EUT (Wi-Fi module) on transmitting and receiving during all testing.

2.5. Test Procedure

The EUT (link Notebook PC) was placed on the table which was above the ground by 80cm and Notebook PC’s adapter’s power cord connected to the AC mains through an Artificial Mains Network (A.M.N.). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to ANSI C63.4-2003, RSS-Gen and RSS-210 regulation during conducted measurement.

The bandwidth of the R&S Test Receiver ESCS30 was set at 9kHz.

The frequency range from 150kHz to 30MHz was checked.

All the final readings from Test Receiver were measured with the Quasi-Peak detector and Average detector. Remark: If the Average limit is met when using a Quasi-Peak detector, the Average detector is unnecessary)

2.6. Conducted Emission Measurement Results

PASSED.

(All the emissions not reported below are too low against the prescribed limits.)

EUT was performed during this section testing and all the test results are attached in next pages.

EUT : Wi-Fi module M/N : WN8122E1


Test Date : Aug. 20, 2012 Temperature : 25 Humidity : 52%

Reference Test Data : Neutral # 3; Line # 4



AUDIX TECHNOLOGY Corp. EMC Department
 No.53-11, Dinfu, Linkou Dist., New Taipei
 City 244, Taiwan R.O.C.
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:emc@audixtech.com

Data: 3 File: D:\test data\REPORT\IC1M1208XXX\IC1M1208112-C.EM6 (6)

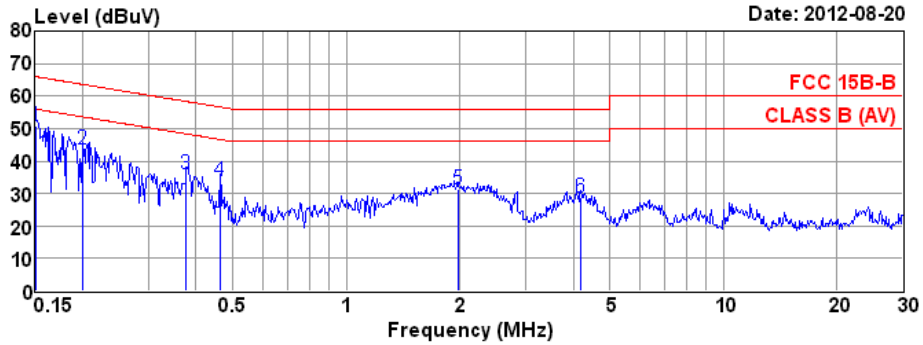

Site no. : No.1 Shielded Room Data no. : 3
 Dis. / Ant. : ENV4200 Ant. pol. : NEUTRAL
 Limit : FCC 15B-B
 Env. / Ins. : 25°C / 52% ESCS 30 (265) Engineer : Fate
 EUT : WN8122E1
 Power Rating : 120Vac/60Hz
 Test Mode : OPERATING


	AMN.	Cable	Emission		Limits	Margin	Remark	
Freq. (MHz)	Factor (dB/m)	Loss (dB)	Reading (dBμV)	Level (dBμV/m)	(dBμV/m)	(dB)		
1	0.15	10.23	9.92	30.72	50.87	66.00	15.13	QP
2	0.20	10.23	9.93	23.63	43.79	63.62	19.83	QP
3	0.38	10.18	9.97	15.87	36.02	58.34	22.32	QP
4	0.46	10.17	9.98	13.92	34.07	56.63	22.56	QP
5	1.98	10.14	10.00	11.15	31.29	56.00	24.71	QP
6	4.20	10.14	10.02	8.74	28.90	56.00	27.10	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Department
 No.53-11, Dinfu, Linkou Dist., New Taipei
 City 244, Taiwan R.O.C.
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:emc@audixtech.com

Data: 4 File: D:\test data\REPORT\IC1M1208XXX\IC1M1208112-C.EM6 (6)

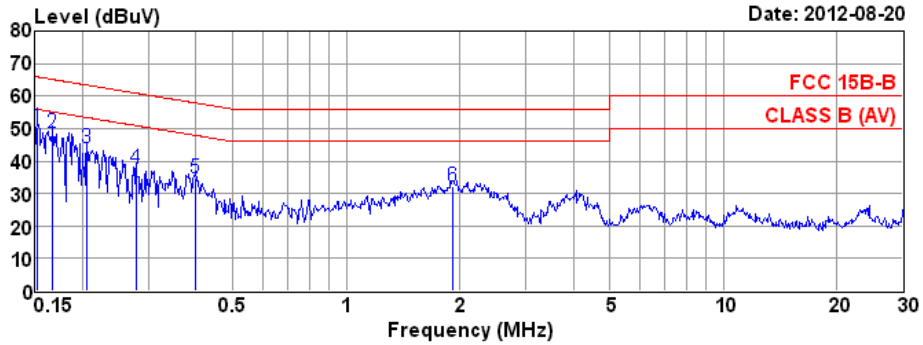

Site no. : No.1 Shielded Room Data no. : 4
 Dis. / Ant. : ENV4200 Ant. pol. : LINE
 Limit : FCC 15B-B
 Env. / Ins. : 25°C / 52% ESCS 30 (265) Engineer : Fate
 EUT : WN8122E1
 Power Rating : 120Vac/60Hz
 Test Mode : OPERATING

	AMN.	Cable	Emission		Limits	Margin	Remark	
Freq. (MHz)	Factor (dB/m)	Loss (dB)	Reading (dBµV)	Level (dBµV/m)	(dBµV/m)	(dB)		
1	0.15	10.22	9.92	30.22	50.36	65.91	15.55	QP
2	0.17	10.23	9.93	28.57	48.73	65.12	16.39	QP
3	0.21	10.24	9.94	23.75	43.93	63.40	19.47	QP
4	0.28	10.22	9.95	17.39	37.56	60.90	23.34	QP
5	0.40	10.20	9.97	14.65	34.82	57.86	23.04	QP
6	1.92	10.18	10.00	11.88	32.06	56.00	23.94	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 08, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 04, 12'	Jul. 03, 13'
3.	Amplifier	HP	8447D	2944A06305	Feb. 13, 12'	Feb. 12, 13'
4.	Biconical Antenna	CHASE	VBA6106 A	1264	Mar. 03, 12'	Mar. 02, 13'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 03, 12'	Mar. 02, 13'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 08, 12'	Aug. 06, 13'
2.	Amplifier	HP	8449B	3008A00529	Dec. 09, 11'	Dec. 08, 12'
3.	Horn Antenna	EMCO	3115	9112-3775	May 09, 12'	May 08, 13'
4.	Horn Antenna	EMCO	3116	2653	Oct. 07, 11'	Oct. 06, 12'
5.	2.4GHz Notch Filter	EWT	EWT-14-00 70-R1	G2	Feb. 14, 12'	Feb. 13, 12'
6.	3.5G High Pass Filter	HP	84300-8003 8	005	Dec. 15, 11'	Dec. 14, 12'
7.	Signal Generator	HP	83732B	US34490489	May 16, 12'	May 15, 13'

3.2. Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

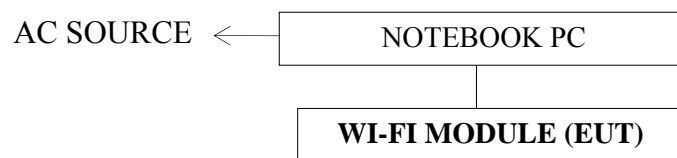

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

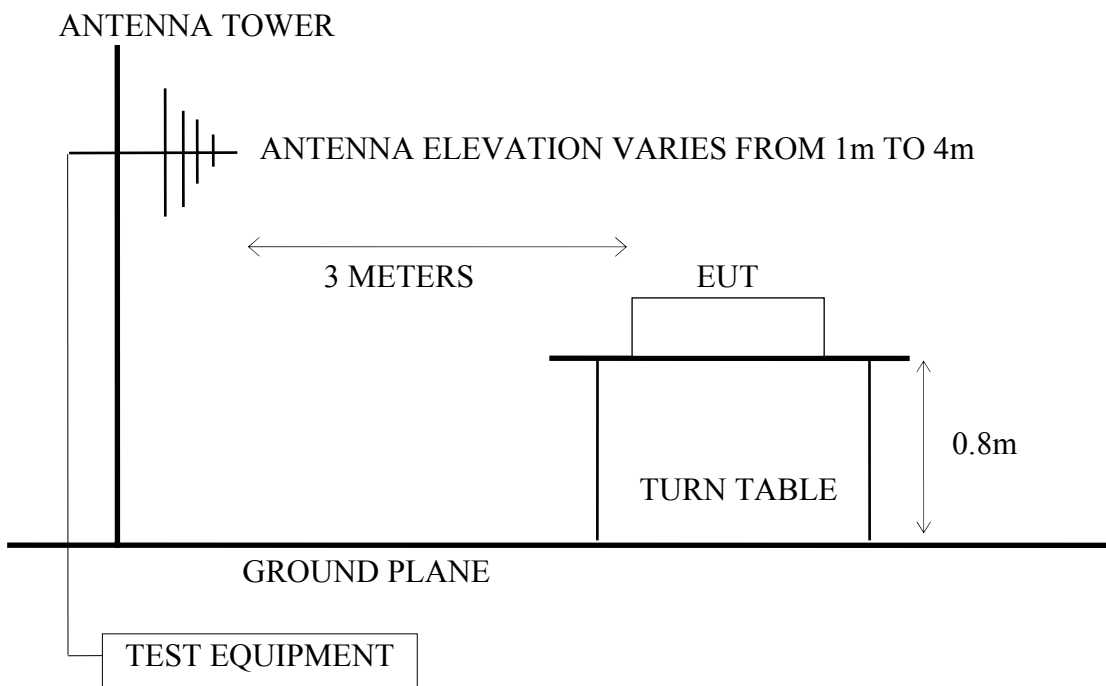

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

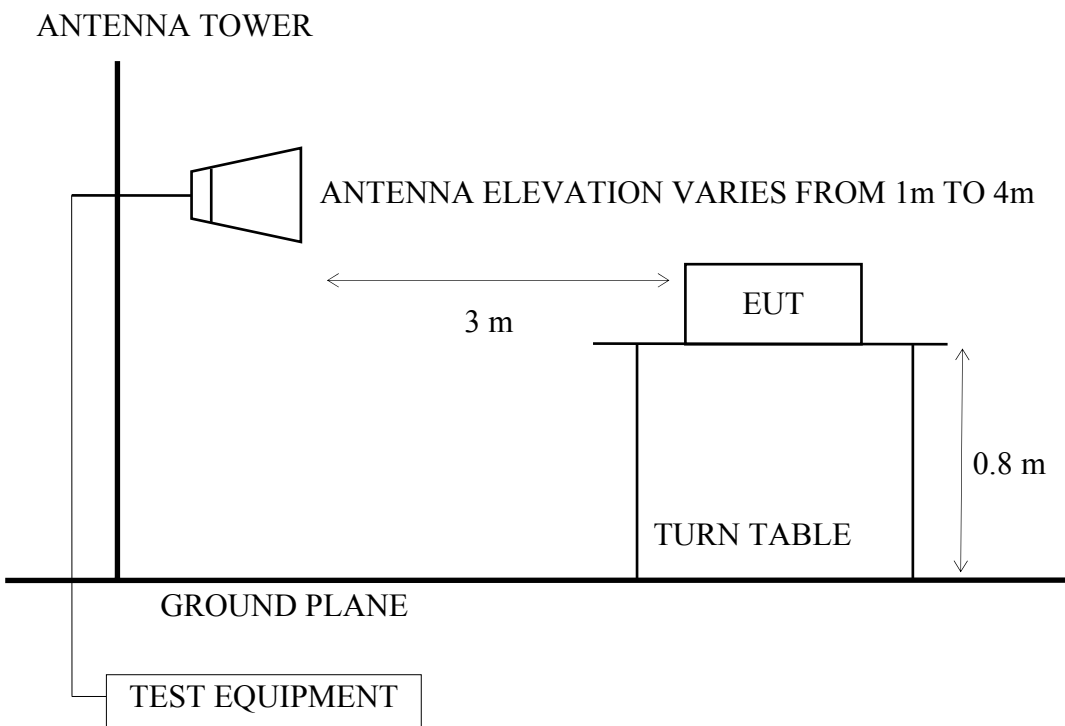

3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35(b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Wi-Fi module) via Notebook PC and simulator as shown on 3.2.
- 3.4.2. To turn on the power of all equipments.
- 3.4.3. The EUT was set the Notebook PC using test program “Broadcom WL Command”.
- 3.4.4. The EUT supports 802.11b/g/n-HT20/n-HT40 modes, we performed pre-scan high, middle, low channels for each mode for spurious emission and listed the worst channel of each mode in test report.

The worst channel of each mode as following:

Mode	Type of Network	Channel
1.	802.11b	CH 1
2.	802.11g	CH 6
3.	802.11a	CH 149
4.	802.11n-HT20	CH 6
5.	802.11n-HT20	CH 65
6.	802.11n-HT40	CH 6
7.	802.11n-HT40	CH 151

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-2003, RSS-Gen and RSS-210 regulation.

The bandwidth of the R&S Test Receiver was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 40GHz (Up to 10th harmonics from fundamental frequency) was checked. 30MHz to 1000MHz was measured with Quasi-Peak detector. Pursuant to ANSI 4.2.2, peak detector is an alternate option for frequency from 30MHz to 1000MHz.

For emissions above 1GHz were measured with peak and average detectors, and performed measurement in 1 m distance for frequency range from 5500MHz up to 40000MHz where there is no emission be found.

Pursuant to ANSI C63.4 8.3.1.2, when peak value complies with the average limit, we didn't perform measurement in average detector.

3.6. Test Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Wi-Fi module M/N : WN8122E1

Test Date : Aug. 20, 2012 Temperature : 25 Humidity : 59%

For Frequency Range 30MHz~1000MHz:

The EUT with following test modes were performed during this section testing and all the test results are listed in section 3.6.1.

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	802.11b	CH 1	2412MHz	Transmit	# 1	# 2
2.	802.11g	CH 6	2437MHz		# 2	# 1
3.	802.11a	CH 149	5745MHz		# 1	# 2
4.	802.11n-HT20	CH 6	2437MHz		# 1	# 2
5.		CH 165	5825MHz		# 2	# 1
6.	802.11n-HT40	CH 6	2437MHz		# 1	# 2
7.		CH 151	5755MHz		# 1	# 2

* Above all final readings were measured with Quasi-Peak detector.

2.4GHz for Frequency above 1GHz:

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.2.

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data			
					Horizontal		Vertical	
					Peak	Average	Peak	Average
1.	802.11b	CH 1	2412MHz	Transmit	# 4	--(Note2)	# 3	--(Note2)
2.	802.11g	CH 6	2437MHz		# 4, 5	--(Note2)	# 3, 6	--(Note2)
3.	802.11n-HT20	CH 6	2437MHz		# 4	--(Note2)	# 3, 6	--(Note2)
4.	802.11n-HT40	CH 6	2437MHz		# 4	--(Note2)	# 3	--(Note2)

Note: 1. Above all final readings were measured with Peak and Average detector.

2. For measurements above 1GHz to 2.68GHz or 2.68GHz-4GHz, the peak measured value complies with the average limit, it is unnecessary to perform an average measurement. (According to ANSI C63.4-2003 section 8.3.1.2)

3. The emissions (up to 25GHz) not reported are too low to be measured.

5.8GHz for Frequency above 1GHz:

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.3.

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data			
					Horizontal		Vertical	
					Peak	Average	Peak	Average
1.	802.11a	CH 149	5745MHz	Transmit	# 4	--(Note2)	# 3	--(Note2)
2.	802.11n-HT20	CH 165	5825MHz		# 3	--(Note2)	# 4	--(Note2)
3.	802.11n-HT40	CH 151	5755MHz		# 4	--(Note2)	# 3	--(Note2)

Note: 1. Above all final readings were measured with Peak and Average detector.

2. For measurements above 1GHz to 2.68GHz, the peak measured value complies with the average limit, it is unnecessary to perform an average measurement. (According to ANSI C63.4-2003 section 8.3.1.2)

3. The emissions (up to 40GHz) not reported are too low to be measured.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 3.6.4. (The restricted bands defined in part 15.205(a))

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	802.11b	CH 6	2412MHz	Transmit	# 3, # 4	# 1, # 2
2.		CH 11	2462MHz		# 5, # 6	# 7, # 8
3.	802.11g	CH 6	2412MHz	Transmit	# 3, # 4	# 1, # 2
4.		CH 11	2462MHz		# 7, # 8	# 5, # 6
5.	802.11n-HT20	CH 6	2412MHz	Transmit	# 3, # 4	# 1, # 2
6.		CH 11	2462MHz		# 7, # 8	# 5, # 6
7.	802.11n-HT40	CH 3	2422MHz	Transmit	# 1, # 2	# 3, # 4
8.		CH 9	2452MHz		# 6, # 5	# 7, # 8

3.6.1. For 30-1000MHz Frequency Range Measurement Results

802.11b, Transmit, Frequency: 2412MHz

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11b)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	15.85	38.76	43.50	4.74	Peak
2	209.450	21.81	3.16	14.89	39.86	43.50	3.64	Peak
3	327.790	15.28	4.10	18.10	37.48	46.00	8.52	Peak
4	481.050	18.74	6.10	7.91	32.75	46.00	13.25	Peak
5	721.610	22.21	6.50	12.72	41.43	46.00	4.57	Peak
6	961.200	26.50	7.60	4.52	38.62	54.00	15.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11b)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	125.060	19.38	2.30	6.82	28.50	43.50	15.00	Peak
2	329.730	15.36	4.14	11.03	30.53	46.00	15.47	Peak
3	481.050	18.74	6.10	6.16	31.00	46.00	15.00	Peak
4	556.710	19.67	6.76	4.77	31.21	46.00	14.79	Peak
5	717.730	22.57	6.55	4.52	33.64	46.00	12.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11g, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	16.66	39.57	43.50	3.93	Peak
2	208.480	21.85	3.12	14.50	39.46	43.50	4.04	Peak
3	481.050	18.74	6.10	7.76	32.60	46.00	13.40	Peak
4	725.490	22.07	6.60	13.09	41.77	46.00	4.23	Peak
5	961.200	26.50	7.60	3.75	37.85	54.00	16.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	127.970	19.62	2.40	6.39	28.41	43.50	15.09	Peak
2	329.730	15.36	4.14	10.21	29.71	46.00	16.29	Peak
3	478.140	18.61	6.00	5.63	30.24	46.00	15.76	Peak
4	551.860	19.23	6.80	5.13	31.16	46.00	14.84	Peak
5	721.610	22.21	6.50	5.36	34.07	46.00	11.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11a, Transmit, Frequency: 5745MHz

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5745 (802.11a)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	16.94	39.85	43.50	3.65	Peak
2	209.450	21.81	3.16	15.12	40.09	43.50	3.41	Peak
3	327.790	15.28	4.10	21.67	41.05	46.00	4.95	Peak
4	483.960	18.84	6.14	8.89	33.87	46.00	12.13	Peak
5	717.730	22.57	6.55	13.35	42.47	46.00	3.53	Peak
6	961.200	26.50	7.60	4.68	38.78	54.00	15.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5745 (802.11a)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	126.030	19.49	2.38	7.10	28.96	43.50	14.54	Peak
2	329.730	15.36	4.14	10.51	30.01	46.00	15.99	Peak
3	484.930	18.80	6.20	5.76	30.76	46.00	15.24	Peak
4	551.860	19.23	6.80	5.55	31.58	46.00	14.42	Peak
5	717.730	22.57	6.55	4.20	33.32	46.00	12.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	15.92	38.83	43.50	4.67	Peak
2	209.450	21.81	3.16	14.63	39.60	43.50	3.90	Peak
3	327.790	15.28	4.10	18.39	37.77	46.00	8.23	Peak
4	480.080	18.68	6.05	8.53	33.26	46.00	12.74	Peak
5	719.670	22.30	6.60	12.68	41.58	46.00	4.42	Peak
6	963.140	26.63	7.60	4.68	38.91	54.00	15.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	106.630	17.77	2.20	11.86	31.82	43.50	11.68	Peak
2	329.730	15.36	4.14	10.67	30.17	46.00	15.83	Peak
3	481.050	18.74	6.10	6.40	31.24	46.00	14.76	Peak
4	719.670	22.30	6.60	5.14	34.04	46.00	11.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 5825MHz

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5825 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	15.78	38.69	43.50	4.81	Peak
2	207.510	21.88	3.12	14.52	39.51	43.50	3.99	Peak
3	329.730	15.36	4.14	20.27	39.77	46.00	6.23	Peak
4	480.080	18.68	6.05	10.28	35.01	46.00	10.99	Peak
5	717.730	22.57	6.55	12.38	41.50	46.00	4.50	Peak
6	961.200	26.50	7.60	5.97	40.07	54.00	13.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5825 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	133.790	19.89	2.40	8.62	30.91	43.50	12.59	Peak
2	329.730	15.36	4.14	10.56	30.06	46.00	15.94	Peak
3	481.050	18.74	6.10	6.05	30.89	46.00	15.11	Peak
4	719.670	22.30	6.60	4.24	33.14	46.00	12.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT40, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	15.67	38.58	43.50	4.92	Peak
2	209.450	21.81	3.16	14.63	39.60	43.50	3.90	Peak
3	327.790	15.28	4.10	17.82	37.20	46.00	8.80	Peak
4	481.050	18.74	6.10	8.51	33.35	46.00	12.65	Peak
5	721.610	22.21	6.50	12.95	41.66	46.00	4.34	Peak
6	963.140	26.63	7.60	4.66	38.89	54.00	15.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	123.120	19.27	2.30	8.26	29.83	43.50	13.67	Peak
2	327.790	15.28	4.10	9.78	29.16	46.00	16.84	Peak
3	481.050	18.74	6.10	6.05	30.89	46.00	15.11	Peak
4	715.790	22.74	6.55	4.48	33.78	46.00	12.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT40, Transmit, Frequency: 5755MHz

Site no. : site Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5755 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	15.69	38.60	43.50	4.90	Peak
2	209.450	21.81	3.16	14.80	39.77	43.50	3.73	Peak
3	327.790	15.28	4.10	19.74	39.12	46.00	6.88	Peak
4	481.050	18.74	6.10	8.05	32.89	46.00	13.11	Peak
5	719.670	22.30	6.60	12.69	41.59	46.00	4.41	Peak
6	961.200	26.50	7.60	4.29	38.39	54.00	15.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5755 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	126.030	19.49	2.38	6.10	27.96	43.50	15.54	Peak
2	329.730	15.36	4.14	10.37	29.87	46.00	16.13	Peak
3	483.960	18.84	6.14	6.00	30.98	46.00	15.02	Peak
4	719.670	22.30	6.60	5.35	34.25	46.00	11.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. 2.4GHz for Above 1GHz Frequency Range Measurement Results

802.11b Transmit, Frequency: 2412MHz

```

Site no.      : site                      Data no.   : 4
Dis. / Ant.  : 3m  3115(4927)           Ant. pol.  : HORIZONTAL
Limit        : FCC PART-15C (1G-AV)
Env. / Ins.  : E4446A 25°C/59%          Vic Fong
EUT          : WN8122E1
Power Rating : DC3.3V
Test Mode    : TX2412 (802.11b)
  
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark	
-----	1	1599.760	26.08	6.14	15.73	47.94	54.00	6.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

```

Site no.      : site                      Data no.   : 3
Dis. / Ant.  : 3m  3115(4927)           Ant. pol.  : VERTICAL
Limit        : FCC PART-15C (1G-AV)
Env. / Ins.  : E4446A 25°C/59%          Vic Fong
EUT          : WN8122E1
Power Rating : DC3.3V
Test Mode    : TX2412 (802.11b)
  
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark	
-----	1	1594.720	26.08	6.12	16.74	48.95	54.00	5.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11g, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	19.35	51.56	54.00	2.44	Peak
2	2002.960	27.60	5.86	12.52	45.98	54.00	8.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1594.720	26.08	6.12	21.21	53.42	54.00	0.58	Peak
2	2002.960	27.60	5.86	13.00	46.46	54.00	7.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	3217.240	30.77	7.37	9.48	47.62	54.00	6.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11g)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	3002.080	30.40	7.22	10.09	47.71	54.00	6.29	Peak
2	3217.240	30.77	7.37	10.94	49.08	54.00	4.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	18.72	50.93	54.00	3.07	Peak
2	1997.920	27.60	5.89	13.09	46.58	54.00	7.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	19.02	51.23	54.00	2.77	Peak
2	2002.960	27.60	5.86	14.92	48.38	54.00	5.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	3002.080	30.40	7.22	10.67	48.29	54.00	5.71	Peak
2	3190.840	30.74	7.35	10.81	48.90	54.00	5.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT40, Transmit, Frequency: 2437MHz

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1594.720	26.08	6.12	21.04	53.25	54.00	0.75	Peak
2	2002.960	27.60	5.86	11.28	44.74	54.00	9.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2437 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1594.720	26.08	6.12	20.79	53.00	54.00	1.00	Peak
2	2002.960	27.60	5.86	13.63	47.09	54.00	6.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.3. 5.8GHz for Above 1GHz Frequency Range Measurement Results

802.11a Transmit, Frequency: 5745MHz

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5745 (802.11a)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1594.720	26.08	6.12	21.73	53.93	54.00	0.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5745 (802.11a)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1603.120	26.08	6.18	21.29	53.55	54.00	0.45	Peak
2	2002.960	27.60	5.86	12.95	46.41	54.00	7.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 5825MHz

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5825 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	21.11	53.32	54.00	0.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5825 (802.11n HT-20)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1594.720	26.08	6.12	19.80	52.01	54.00	1.99	Peak
2	2002.960	27.60	5.86	11.86	45.32	54.00	8.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT40, Transmit, Frequency: 5755MHz

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5755 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	20.34	52.55	54.00	1.45	Peak
2	1997.920	27.60	5.89	11.92	45.41	54.00	8.59	Peak
3	2434.720	28.55	6.39	10.73	45.67	54.00	8.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX5755 (802.11n HT-40)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	1599.760	26.08	6.14	21.30	53.51	54.00	0.49	Peak
2	2002.960	27.60	5.86	13.28	46.74	54.00	7.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.4. Restricted Bands Measurement Results

Date of Test : Aug. 20, 2012 Temperature : 25
 EUT : Wi-Fi module Humidity : 59%
 Test Mode : 802.11b, Transmit, Channel: 01, Frequency: 2412MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

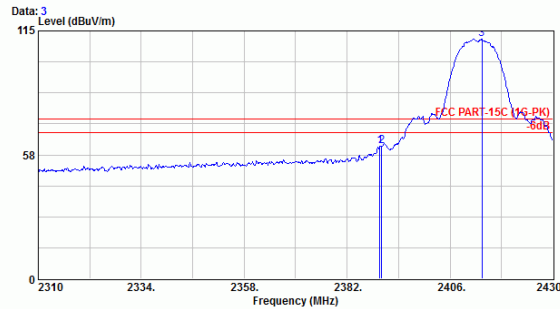


Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11b)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.680	28.47	6.34	26.65	61.47	74.00	12.53	Peak
2 2390.040	28.47	6.34	26.49	61.31	74.00	12.69	Peak
3 2413.440	28.51	6.36	76.39	111.26	74.00	-37.26	Peak X

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

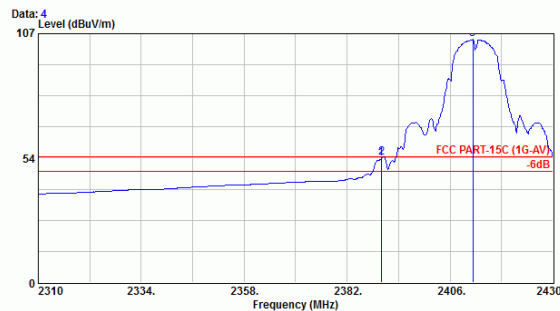

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11b)



Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.920	28.47	6.34	18.49	53.30	54.00	0.70	Average !
2 2390.040	28.47	6.34	18.78	53.60	54.00	0.40	Average !
3 2411.280	28.51	6.36	69.58	104.45	54.00	-50.45	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%



Test Mode : 802.11b, Transmit, Channel: 01, Frequency: 2412MHz

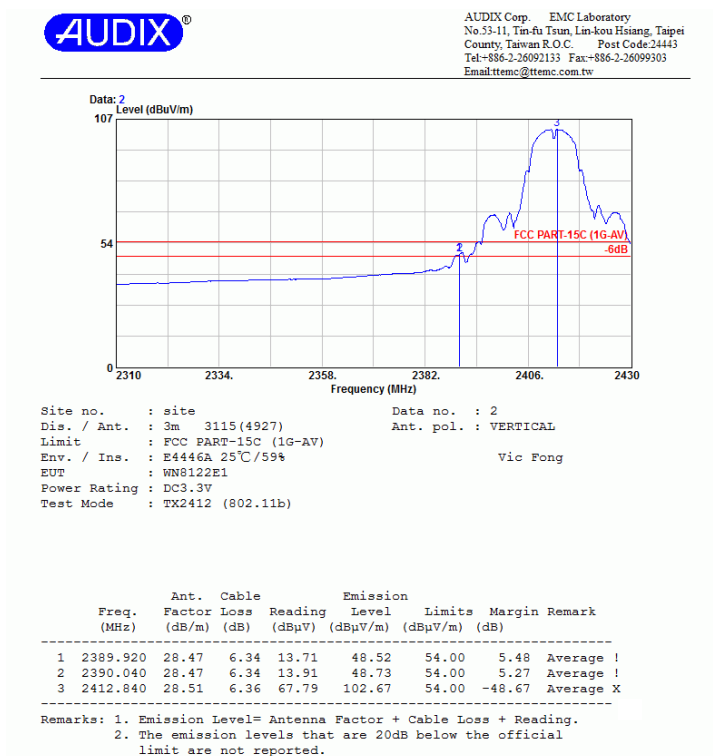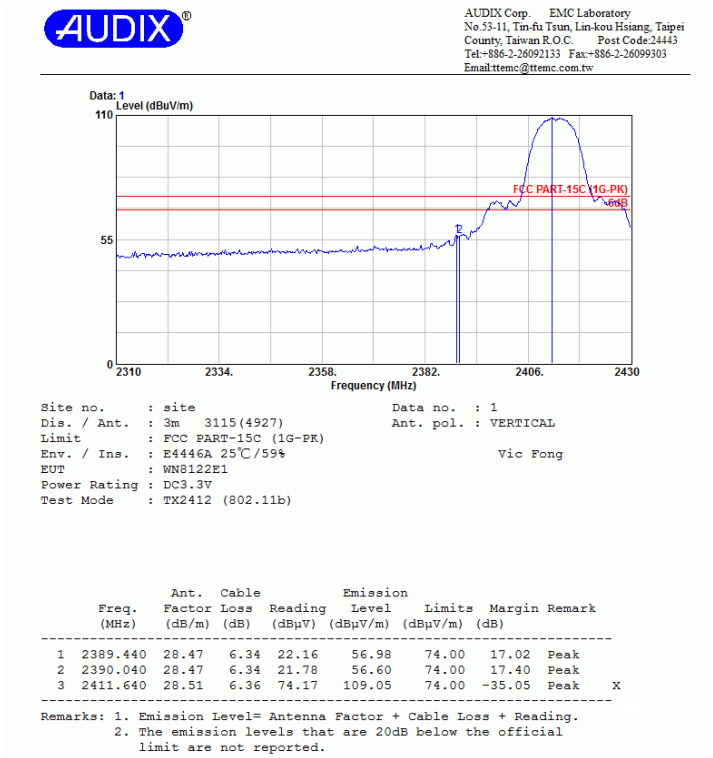

Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11b, Transmit, Channel: 11, Frequency: 2462MHz

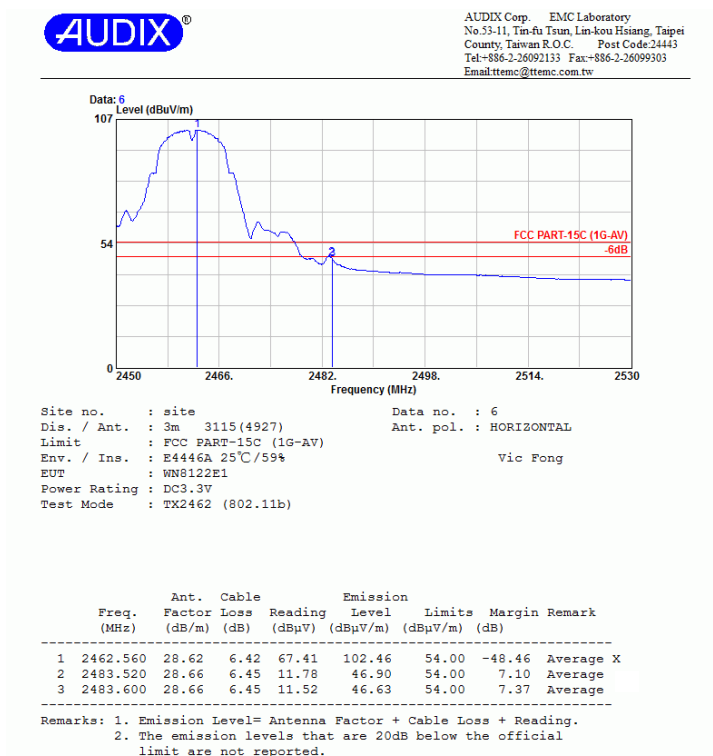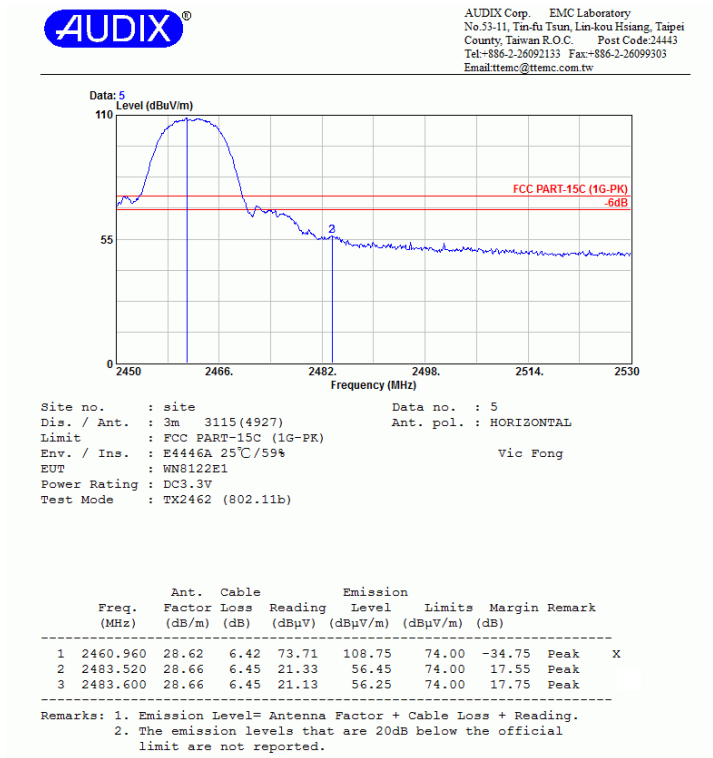


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11b, Transmit, Channel: 11, Frequency: 2462MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel--886-2-26092133 Fax--886-2-26099303
 Email:ttemc@ttemc.com.tw

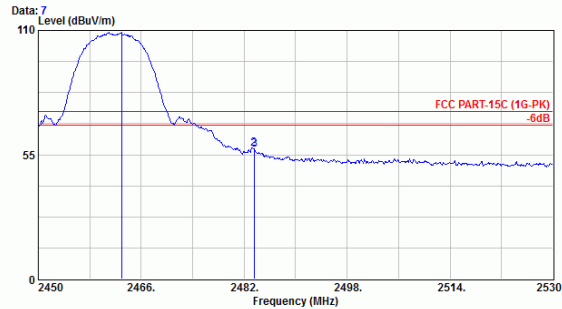


Site no. : site Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11b)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.960	28.62	6.42	73.96	109.01	74.00	-35.01	Peak X
2 2483.520	28.66	6.45	22.41	57.53	74.00	16.47	Peak
3 2483.600	28.66	6.45	22.08	57.19	74.00	16.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel--886-2-26092133 Fax--886-2-26099303
 Email:ttemc@ttemc.com.tw

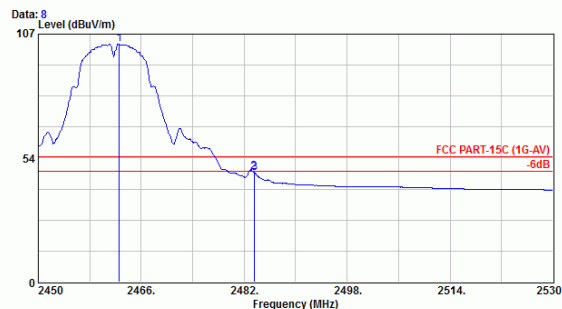

Site no. : site Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11b)


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.560	28.62	6.42	67.71	102.76	54.00	-48.76	Average @
2 2483.520	28.66	6.45	12.19	47.31	54.00	6.69	Average
3 2483.600	28.66	6.45	12.02	47.13	54.00	6.87	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 20, 2012 Temperature : 25
 EUT : Wi-Fi module Humidity : 59%
 Test Mode : 802.11g, Transmit, Channel: 01, Frequency: 2412MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ku Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

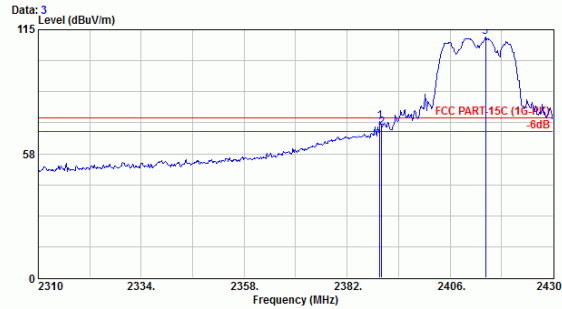


Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.680	28.47	6.34	37.76	72.58	74.00	1.42	Peak @
2 2390.040	28.47	6.34	34.76	69.58	74.00	4.42	Peak (
3 2414.280	28.51	6.36	76.74	111.61	74.00	-37.61	Peak (

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ku Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

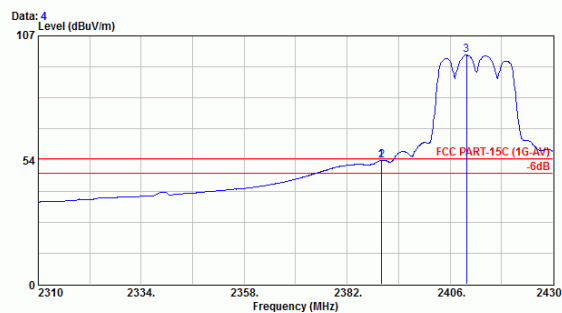

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.920	28.47	6.34	18.56	53.37	54.00	0.63	Average @
2 2390.040	28.47	6.34	18.59	53.41	54.00	0.59	Average (
3 2409.840	28.51	6.36	63.81	98.69	54.00	-44.69	Average (

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11g, Transmit, Channel: 01, Frequency: 2412MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

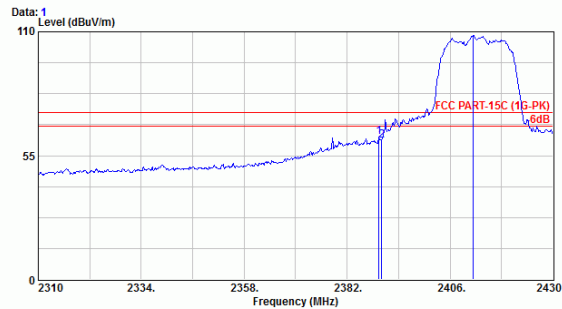


Site no. : site Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.440	28.47	6.34	28.31	63.13	74.00	10.87	Peak @
2 2390.040	28.47	6.34	26.95	61.77	74.00	12.23	Peak
3 2411.280	28.51	6.36	73.55	108.42	74.00	-34.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

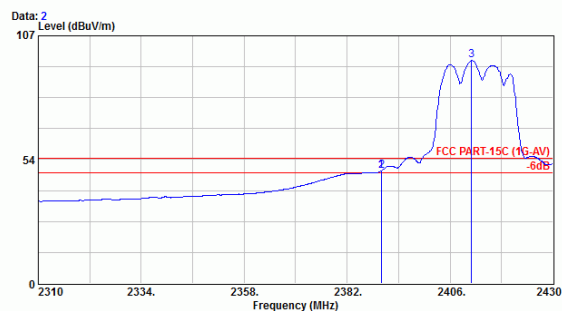

Site no. : site Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.920	28.47	6.34	13.71	48.52	54.00	5.48	Average @
2 2390.040	28.47	6.34	13.78	48.60	54.00	5.40	Average @
3 2411.040	28.51	6.36	61.36	96.23	54.00	-42.23	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11g, Transmit, Channel: 11, Frequency: 2462MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

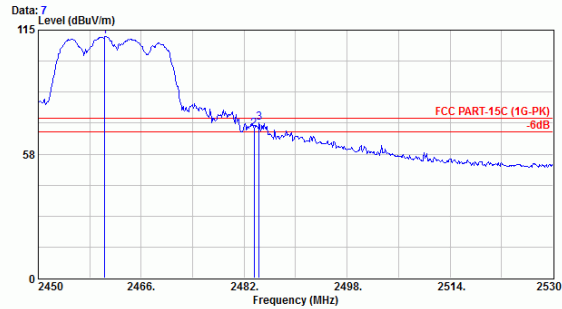


Site no. : site Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2460.320	28.62	6.42	77.15	112.20	74.00	-38.20	Peak @
2 2483.520	28.66	6.45	34.16	69.28	74.00	4.72	Peak @
3 2484.320	28.66	6.45	36.96	72.07	74.00	1.93	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

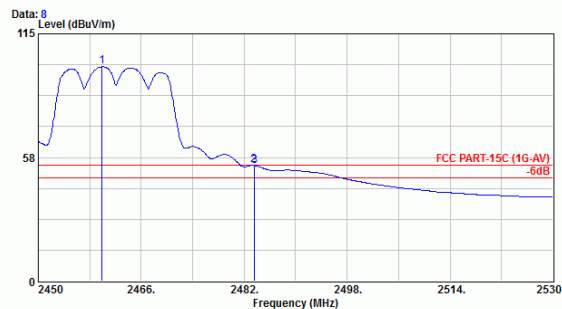

Site no. : site Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2459.920	28.62	6.42	64.65	99.69	54.00	-45.69	Average @
2 2483.520	28.66	6.45	18.61	53.73	54.00	0.27	Average @
3 2483.600	28.66	6.45	18.59	53.70	54.00	0.30	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11g, Transmit, Channel: 11, Frequency: 2462MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

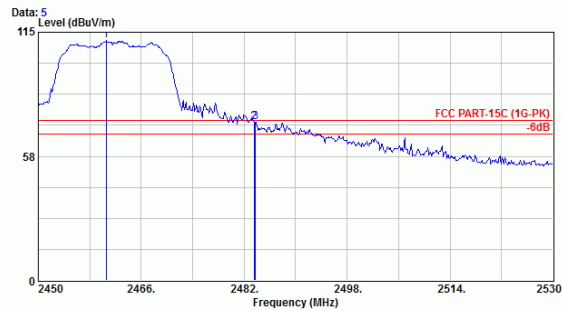


Site no. : site Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11g)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1 2460.560	28.62	6.42	76.12	111.17	74.00	-37.17	Peak @
2 2483.520	28.66	6.45	38.37	73.49	74.00	0.51	Peak @
3 2483.760	28.66	6.45	38.37	73.49	74.00	0.51	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

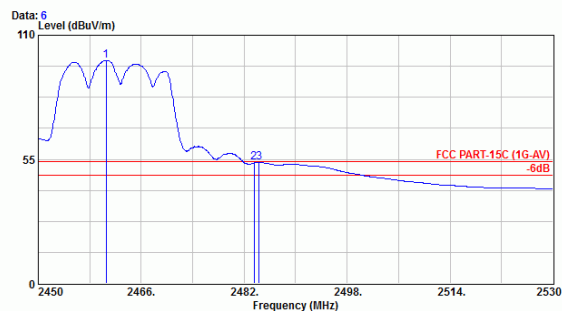

Site no. : site Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11g)



Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1 2460.560	28.62	6.42	63.82	98.87	54.00	-44.87	Average @
2 2483.520	28.66	6.45	18.33	53.45	54.00	0.55	Average @
3 2484.320	28.66	6.45	18.55	53.66	54.00	0.34	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT20, Transmit, Channel: 01, Frequency: 2412MHz

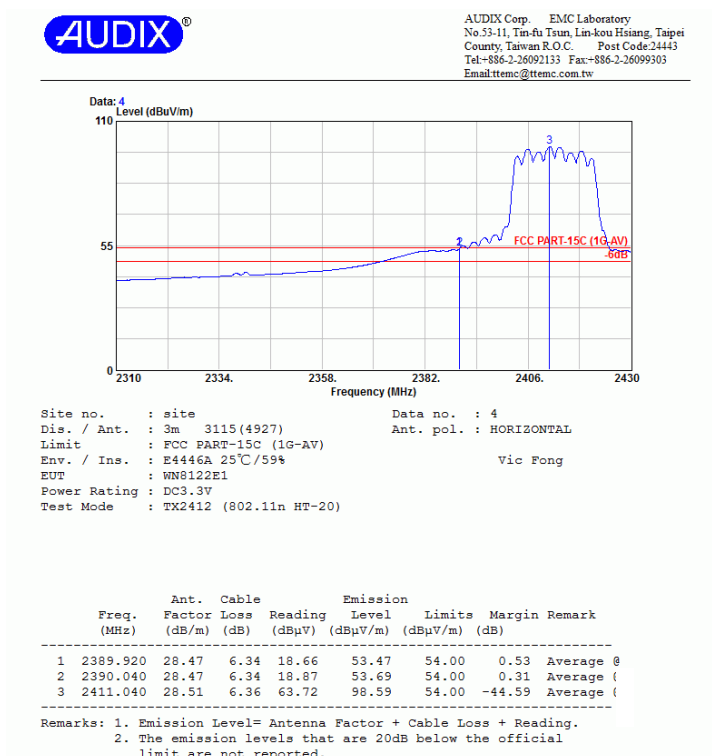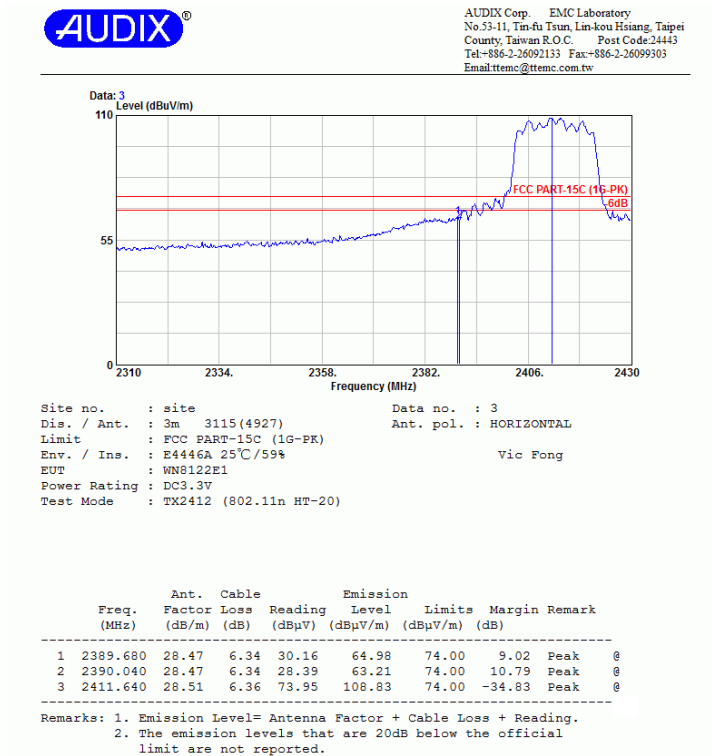


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT20, Transmit, Channel: 01, Frequency: 2412MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ti Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

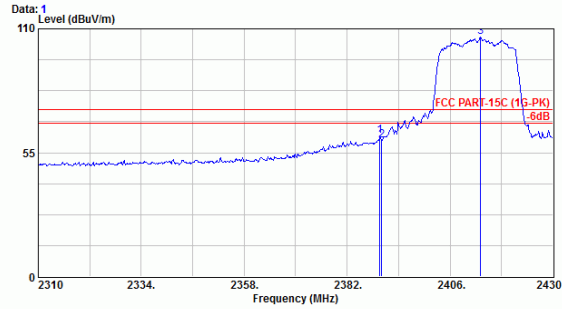


Site no. : site Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11n HT-20)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.680	28.47	6.34	27.44	62.26	74.00	11.74	Peak @
2 2390.040	28.47	6.34	25.47	60.29	74.00	13.71	Peak @
3 2413.080	28.51	6.36	71.50	106.37	74.00	-32.37	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ti Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

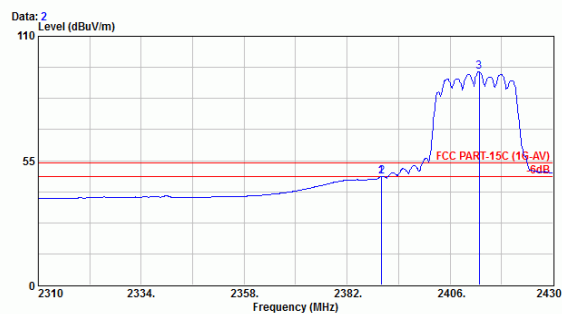

Site no. : site Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2412 (802.11n HT-20)



Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.920	28.47	6.34	13.06	47.98	54.00	6.12	Average @
2 2390.040	28.47	6.34	13.13	47.95	54.00	6.05	Average
3 2412.840	28.51	6.36	59.29	94.17	54.00	-40.17	Average !

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT20, Transmit, Channel: 11, Frequency: 2462MHz

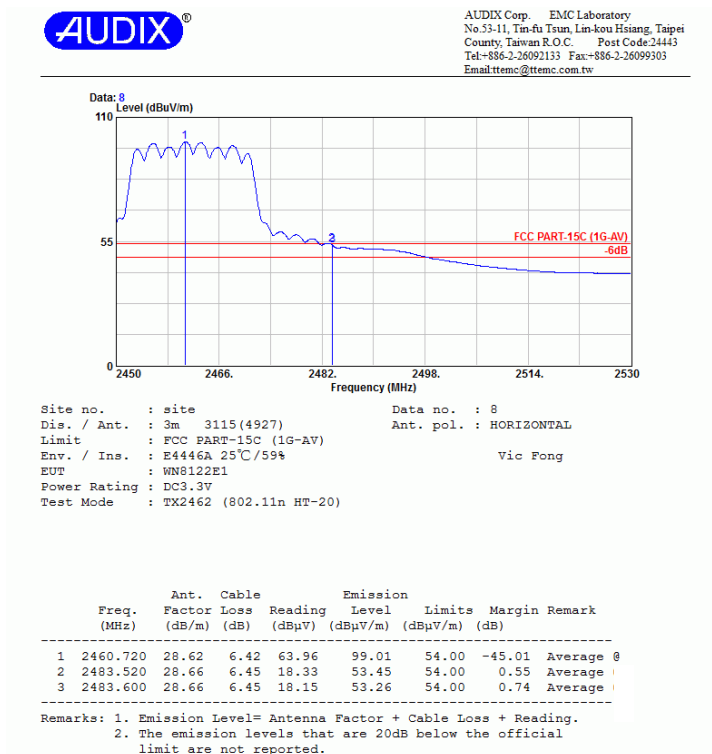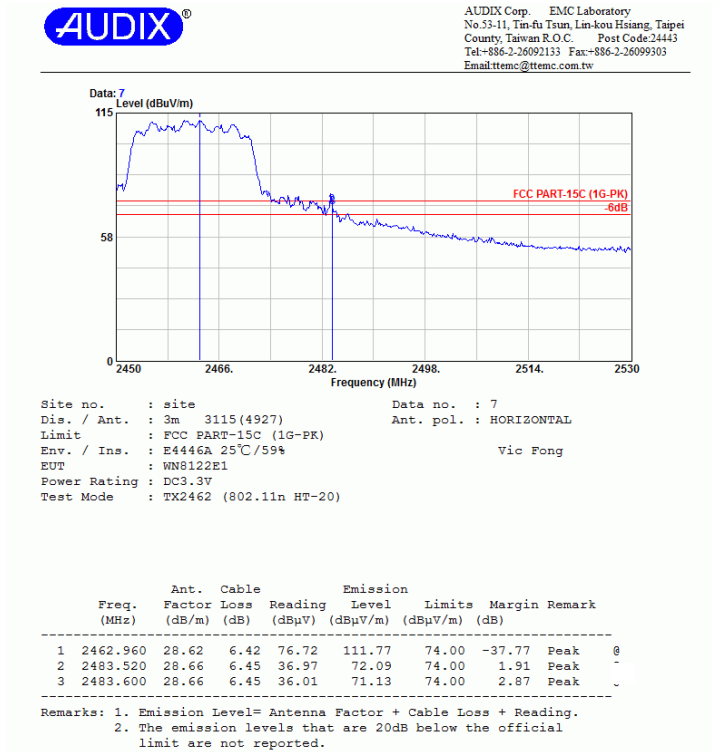


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT20, Transmit, Channel: 11, Frequency: 2462MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

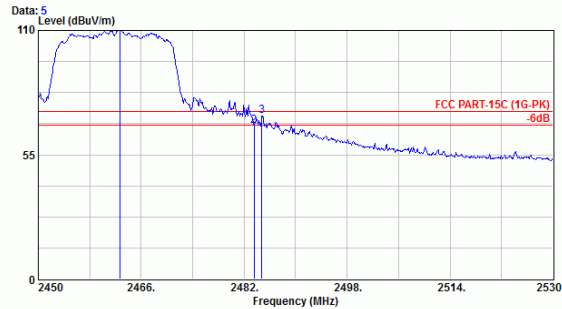


Site no. : site Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11n HT-20)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.720	28.62	6.42	75.31	110.36	74.00	-36.36	Peak @
2 2483.520	28.66	6.45	32.48	67.60	74.00	6.40	Peak
3 2484.720	28.66	6.45	37.17	72.28	74.00	1.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

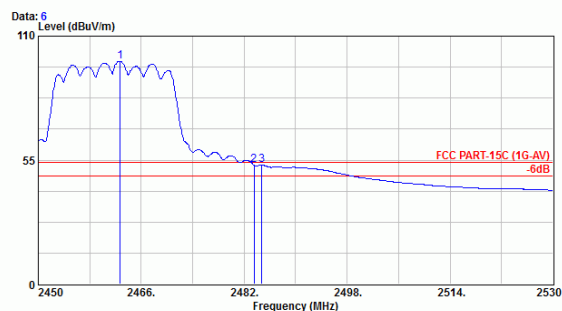

Site no. : site Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2462 (802.11n HT-20)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.720	28.62	6.42	63.78	98.83	54.00	-44.83	Average @
2 2483.520	28.66	6.45	17.66	52.78	54.00	1.22	Average
3 2484.720	28.66	6.45	17.77	52.88	54.00	1.12	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT40, Transmit, Channel: 03, Frequency: 2422MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ku Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

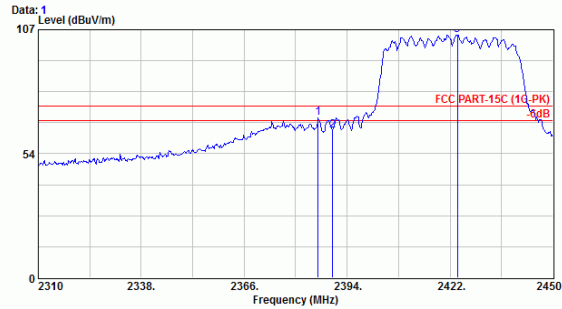


Site no. : site Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2422 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2386.160	28.47	6.33	34.00	68.80	74.00	5.20	Peak @
2 2390.080	28.47	6.34	28.77	63.59	74.00	10.41	Peak @
3 2423.960	28.55	6.38	69.69	104.63	74.00	-30.63	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-ku Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

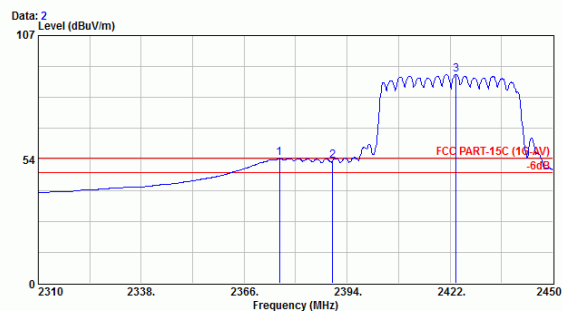

Site no. : site Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2422 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2375.660	28.43	6.32	19.15	53.91	54.00	0.09	Average @
2 2390.080	28.47	6.34	18.13	52.95	54.00	1.05	Average @
3 2423.680	28.55	6.38	55.20	90.13	54.00	-36.13	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT40, Transmit, Channel: 03, Frequency: 2422MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

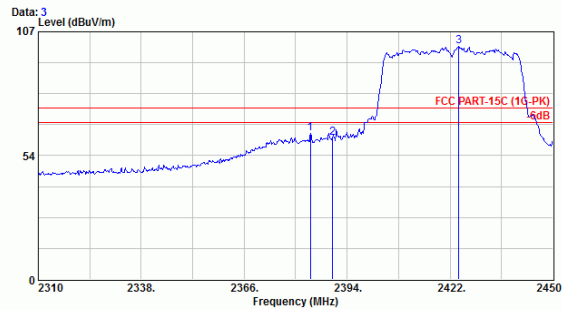


Site no. : site Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2422 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2384.060	28.43	6.33	28.48	63.25	74.00	10.75	Peak
2 2390.080	28.47	6.34	26.25	61.07	74.00	12.93	Peak
3 2424.380	28.55	6.38	65.65	100.58	74.00	-26.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

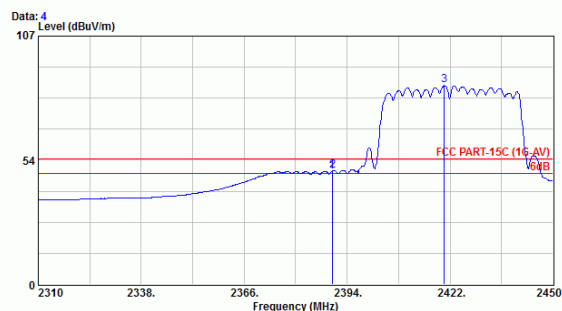

Site no. : site Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2422 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2389.940	28.47	6.34	13.94	48.76	54.00	5.24	Average
2 2390.080	28.47	6.34	14.10	48.92	54.00	5.08	Average
3 2420.460	28.55	6.37	50.72	85.64	54.00	-31.64	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT40, Transmit, Channel: 09, Frequency: 2452MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-Ri Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

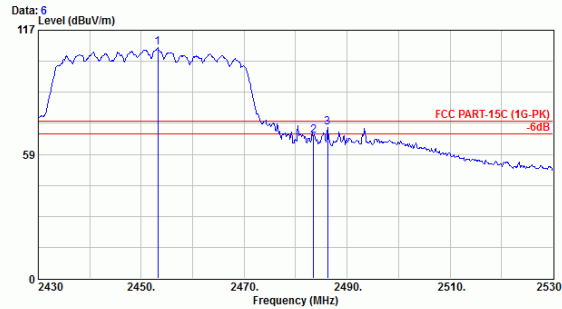


Site no. : site Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2452 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2453.200	28.59	6.42	73.66	108.66	74.00	-34.66	Peak @
2 2483.500	28.66	6.45	32.20	67.31	74.00	6.69	Peak
3 2486.200	28.66	6.45	35.84	70.96	74.00	3.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-Ri Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

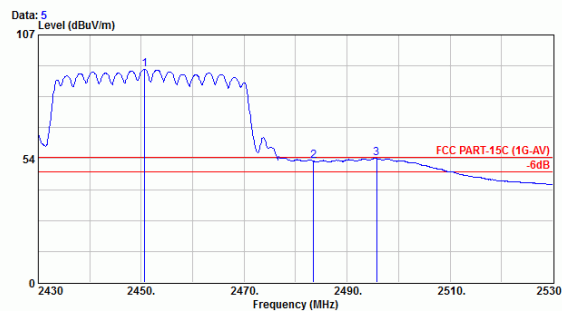

Site no. : site Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2452 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2450.700	28.59	6.41	57.05	92.04	54.00	-38.04	Average @
2 2483.500	28.66	6.45	17.34	52.45	54.00	1.55	Average
3 2495.700	28.70	6.46	18.49	53.65	54.00	0.35	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Aug. 20, 2012 Temperature : 25

EUT : Wi-Fi module Humidity : 59%

Test Mode : 802.11n-HT40, Transmit, Channel: 09, Frequency: 2452MHz



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-Ru Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

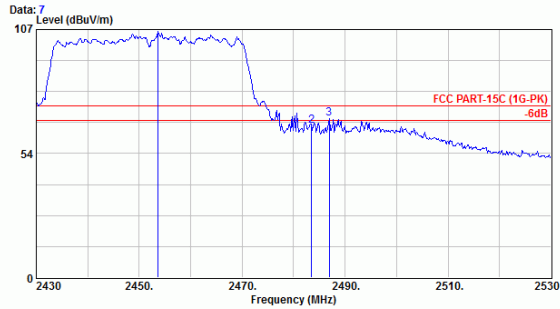


Site no. : site Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PR)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2452 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1 2453.700	28.62	6.42	71.14	106.18	74.00	-32.18	Peak
2 2483.500	28.66	6.45	30.25	65.36	74.00	8.64	Peak
3 2486.900	28.66	6.45	33.64	68.76	74.00	5.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-Ru Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

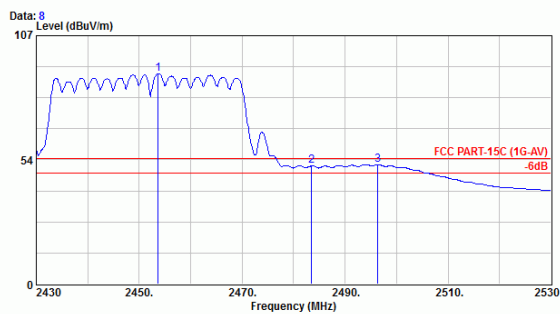

Site no. : site Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 25°C/59% Vic Fong
 EUT : WN8122E1
 Power Rating : DC3.3V
 Test Mode : TX2452 (802.11n HT-40)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1 2453.700	28.62	6.42	55.55	90.59	54.00	-36.59	Average
2 2483.500	28.66	6.45	15.80	50.91	54.00	3.09	Average
3 2496.400	28.70	6.46	16.37	51.53	54.00	2.47	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


4. 6dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'

4.2. Block Diagram of Test Setup

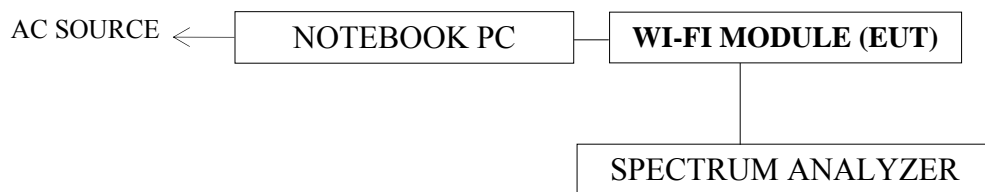

4.3. Specification Limits [§15.247(a)(2), RSS-210 §A8.2 (a)]

The minimum 6dB bandwidth shall be at least 500kHz.

4.4. Operating Condition of EUT

The test program “Broadcom WL Command” was used to enable the EUT to transmit data at different channel frequency individually.

4.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1.5% EBW, $VBW \geq 3 \times RBW$. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

The measurement guideline was according to KDB 558074 D01.

4.6. Test Results

PASSED. All the test results are attached in next pages.


(Test Date : Jul. 24, 2012 Temperature : 26 Humidity : 50%)

(Test Date : Aug. 14, 2012 Temperature : 25 Humidity : 51%)


Mode	Type of Network	Channel	Frequency	6dB Bandwidth
1.	802.11b	CH 1	2412MHz	8.70MHz
2.		CH 6	2437MHz	8.70MHz
3.		CH 11	2462MHz	8.70MHz
4.	802.11g	CH 1	2412MHz	14.45MHz
5.		CH 6	2437MHz	14.70MHz
6.		CH 11	2462MHz	15.25MHz
7.	802.11a	CH 149	5745MHz	16.05MHz
8.		CH 157	5785MHz	16.00MHz
9.		CH 165	5825MHz	16.00MHz
10.	802.11n-HT20	CH 1	2412MHz	16.45MHz
11.		CH 6	2437MHz	16.40MHz
12.		CH 11	2462MHz	16.40MHz
13.	802.11n-HT20	CH 149	5745MHz	16.65MHz
14.		CH 157	5785MHz	16.40MHz
15.		CH 165	5825MHz	16.40MHz
16.	802.11n-HT40	CH 3	2422MHz	36.00MHz
17.		CH 6	2437MHz	35.52MHz
18.		CH 9	2452MHz	36.00MHz
19.	802.11n-HT40	CH 151	5755MHz	36.00MHz
20.		CH 159	5795MHz	36.00MHz

[Limit: least 500kHz]


802.11b, Frequency: 2412MHz

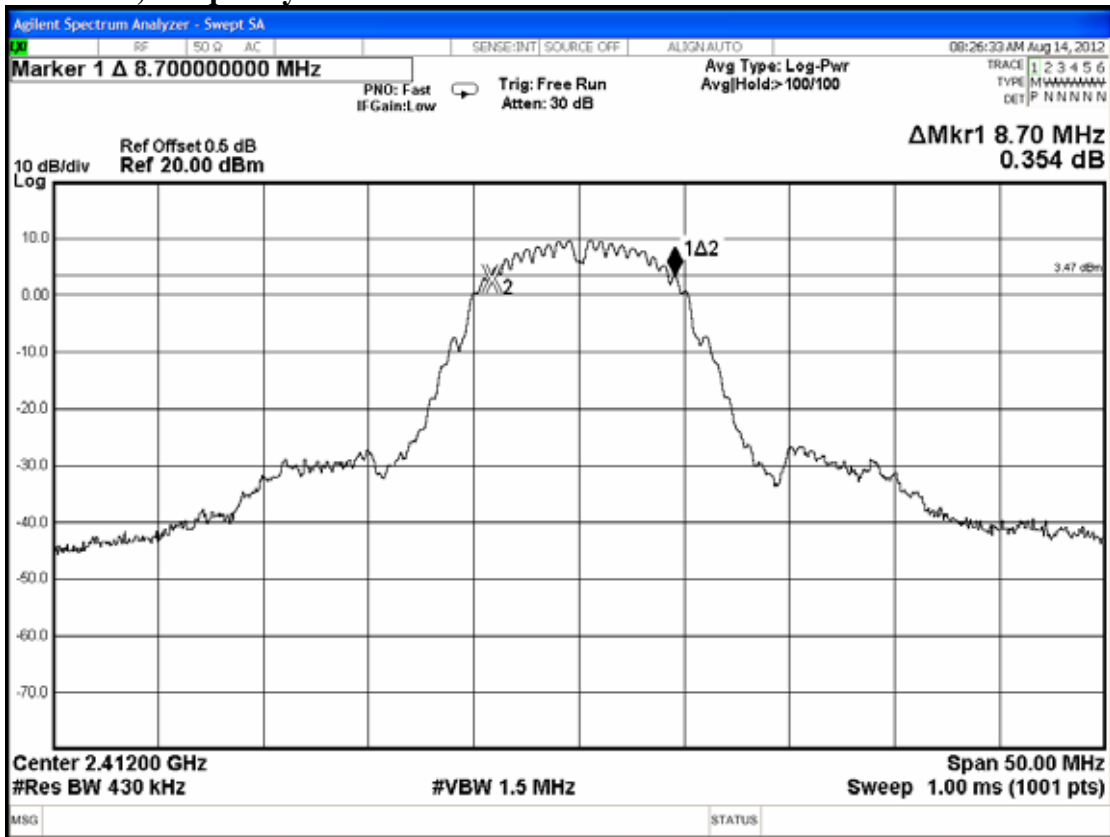


802.11b, Frequency: 2437MHz

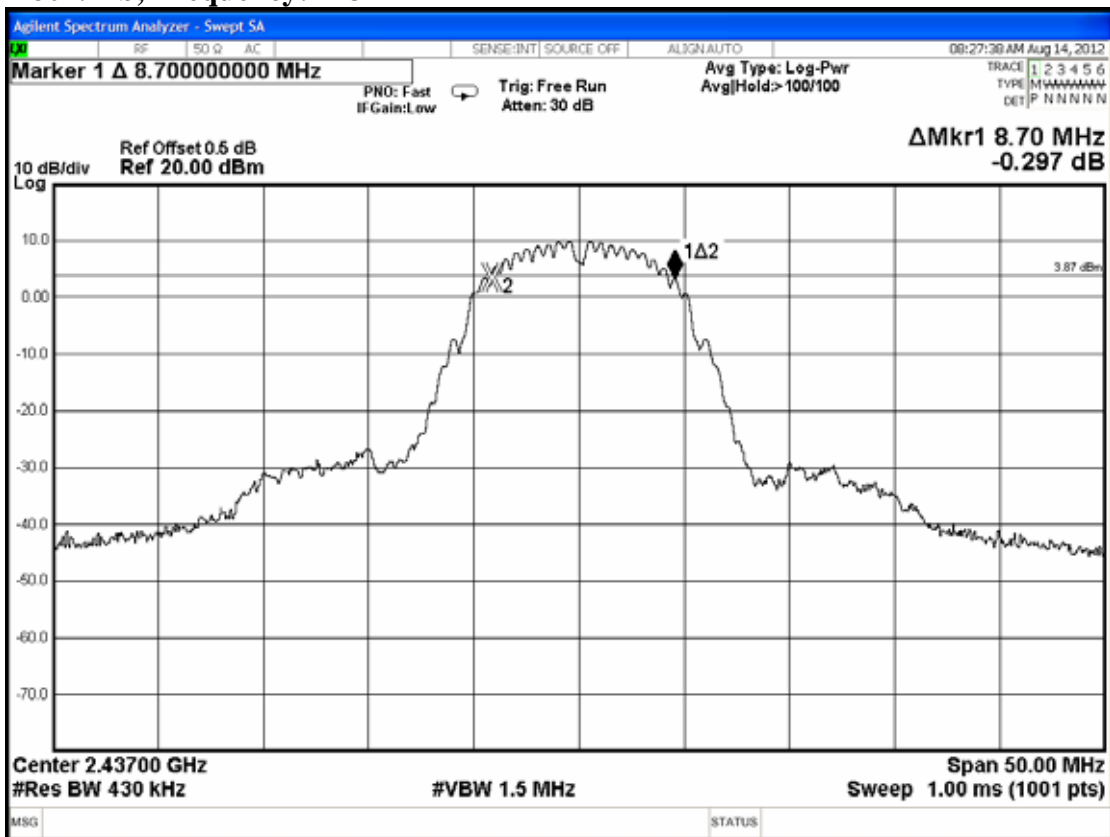


802.11b, Frequency: 2462MHz

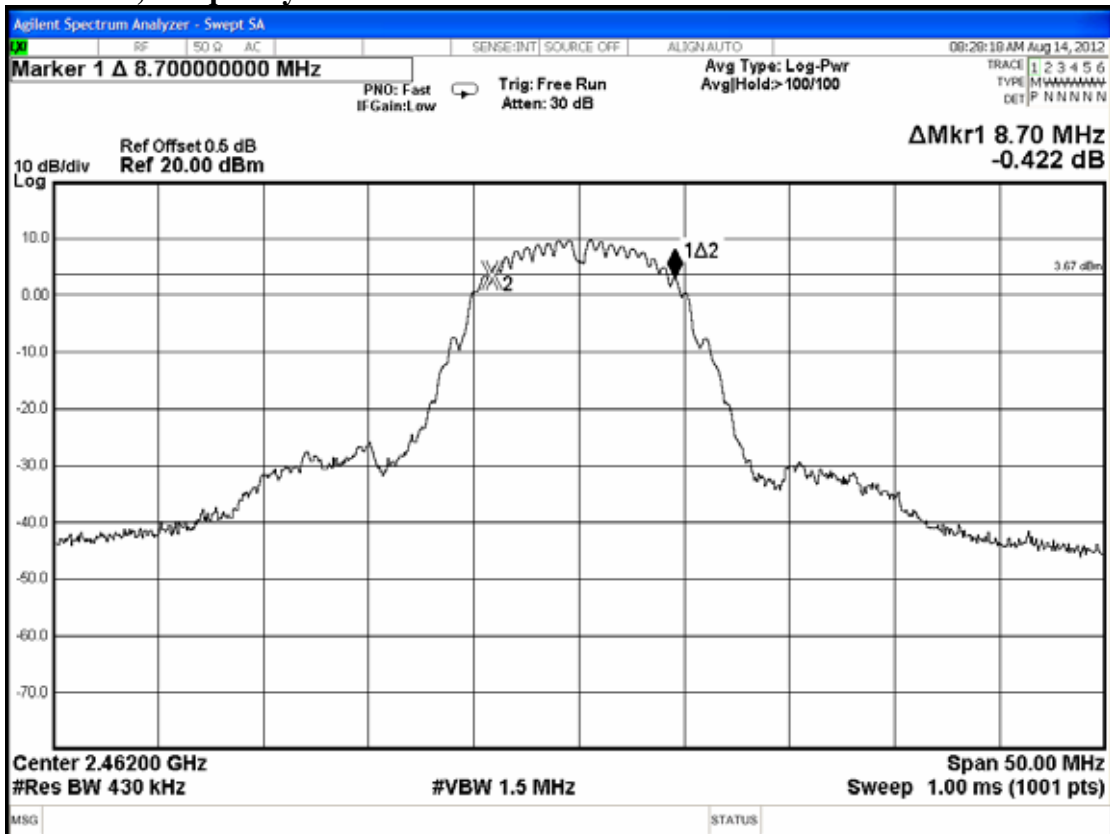


802.11g, Frequency: 2412MHz

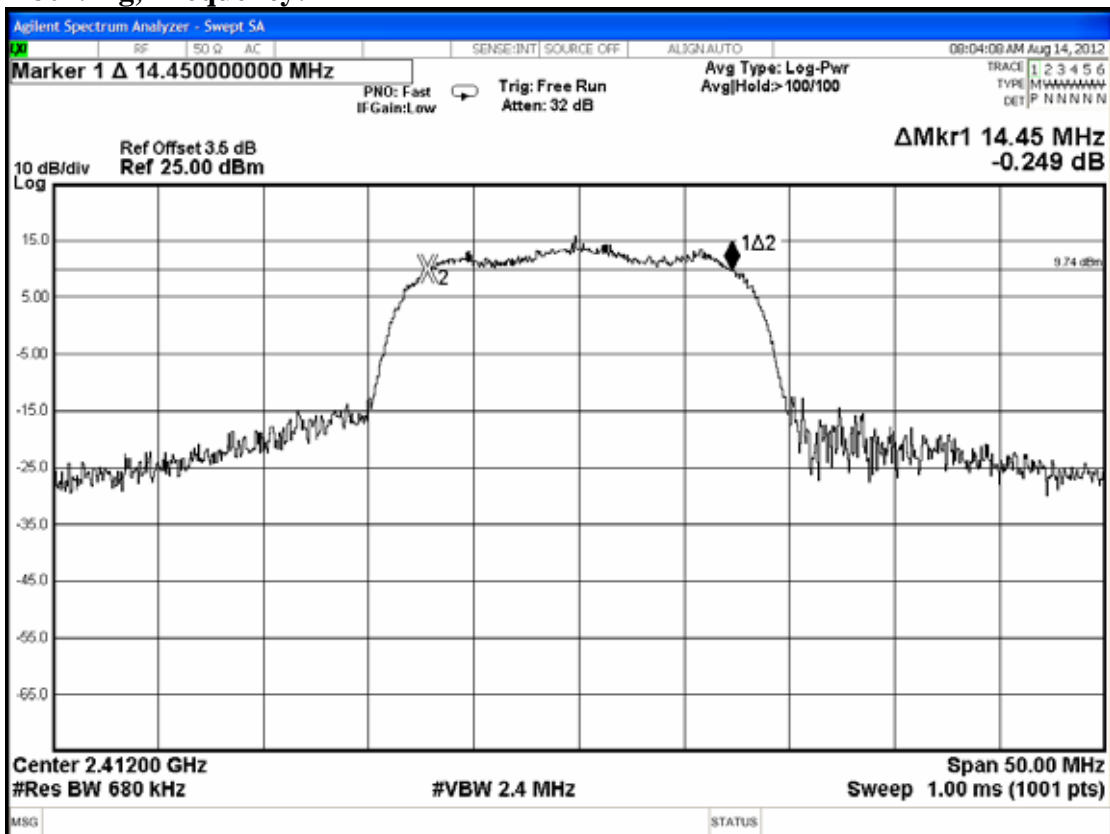


802.11g, Frequency: 2437MHz

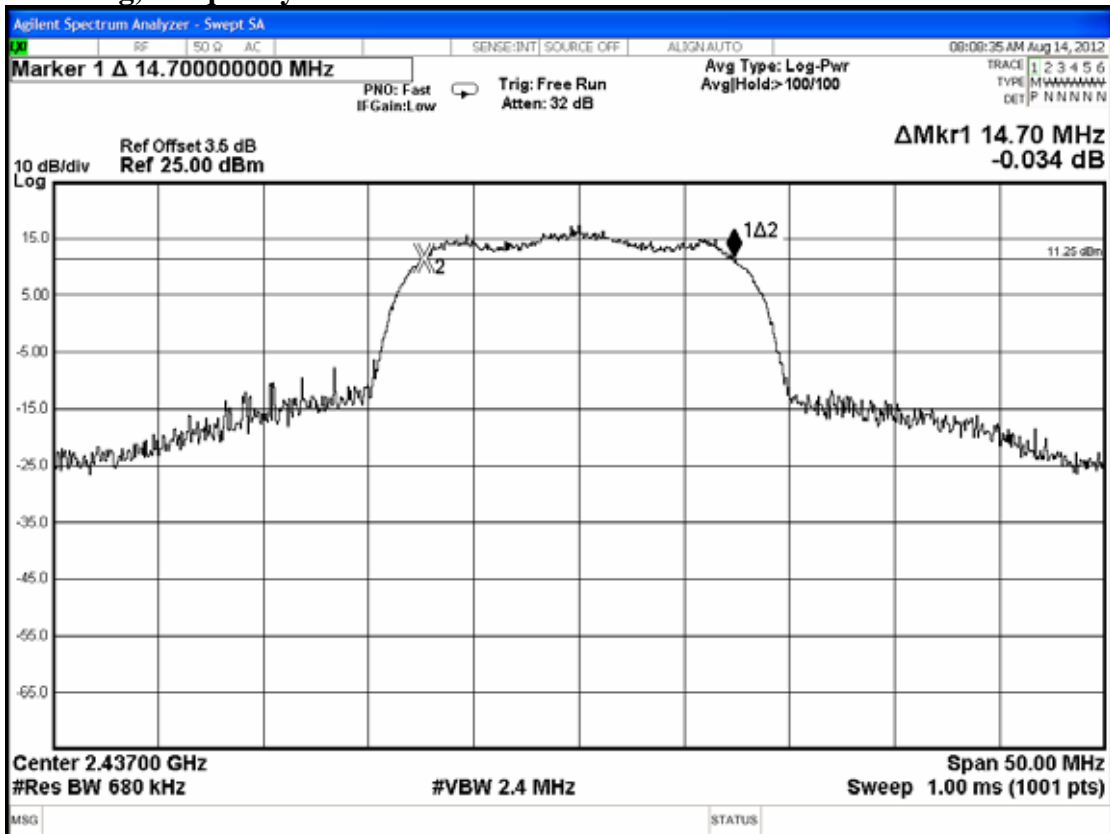


802.11g, Frequency: 2462MHz

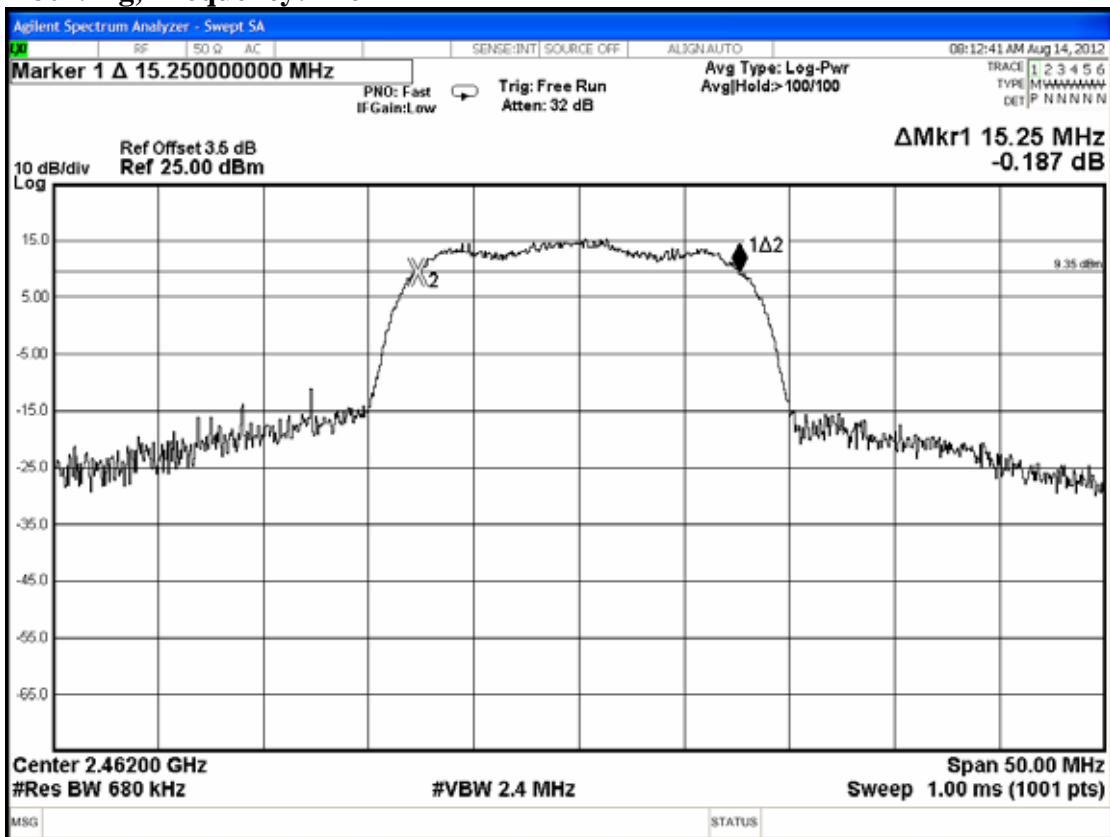


802.11a, Frequency: 5745MHz

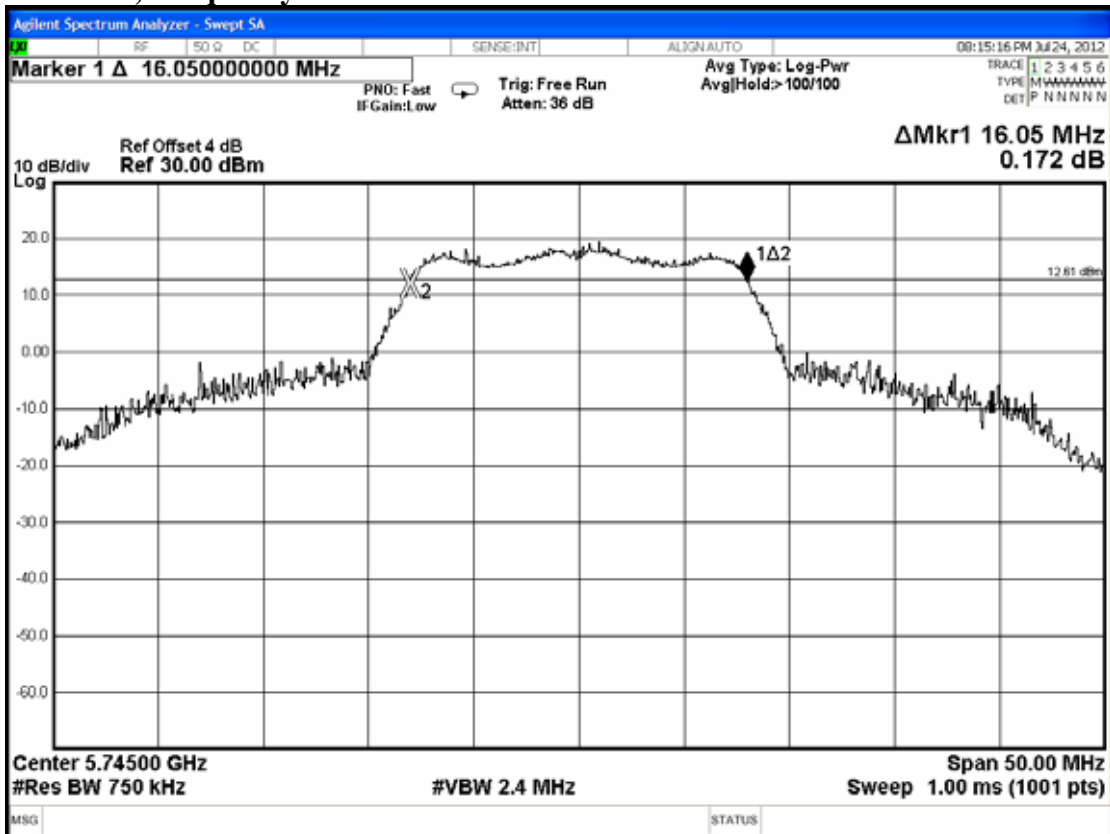


802.11a, Frequency: 5785MHz

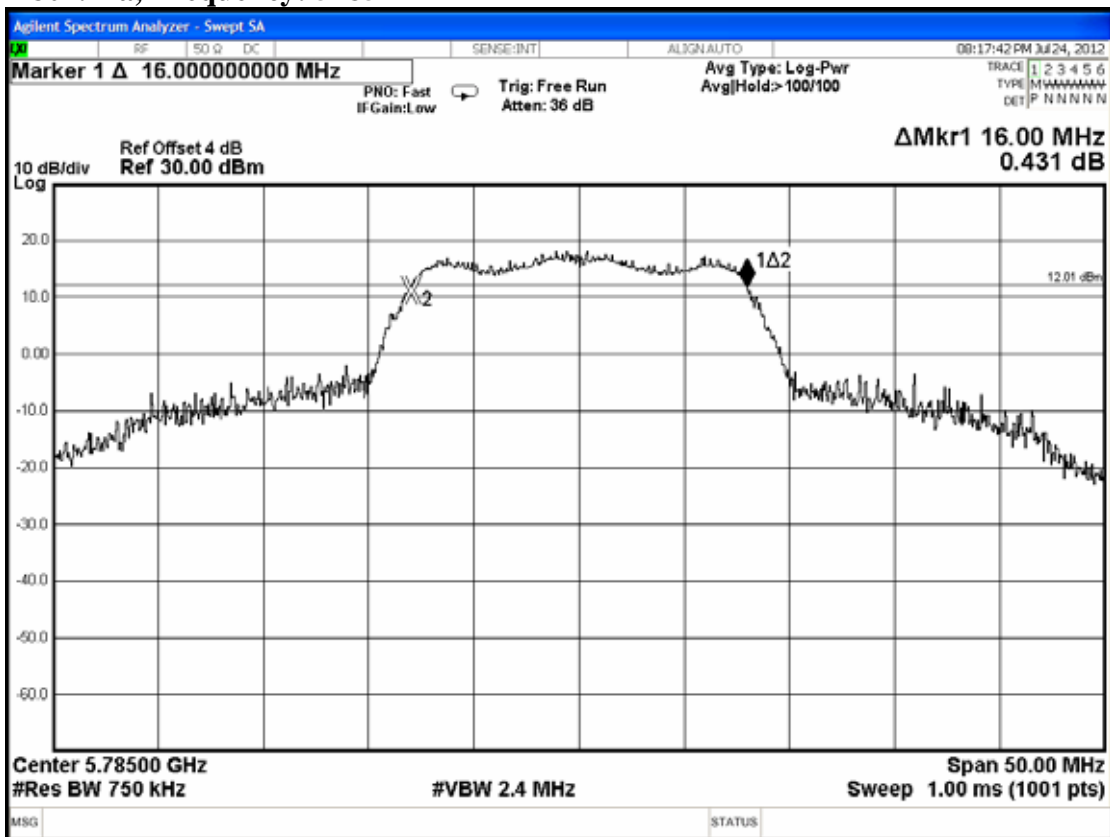


802.11a, Frequency: 5825MHz

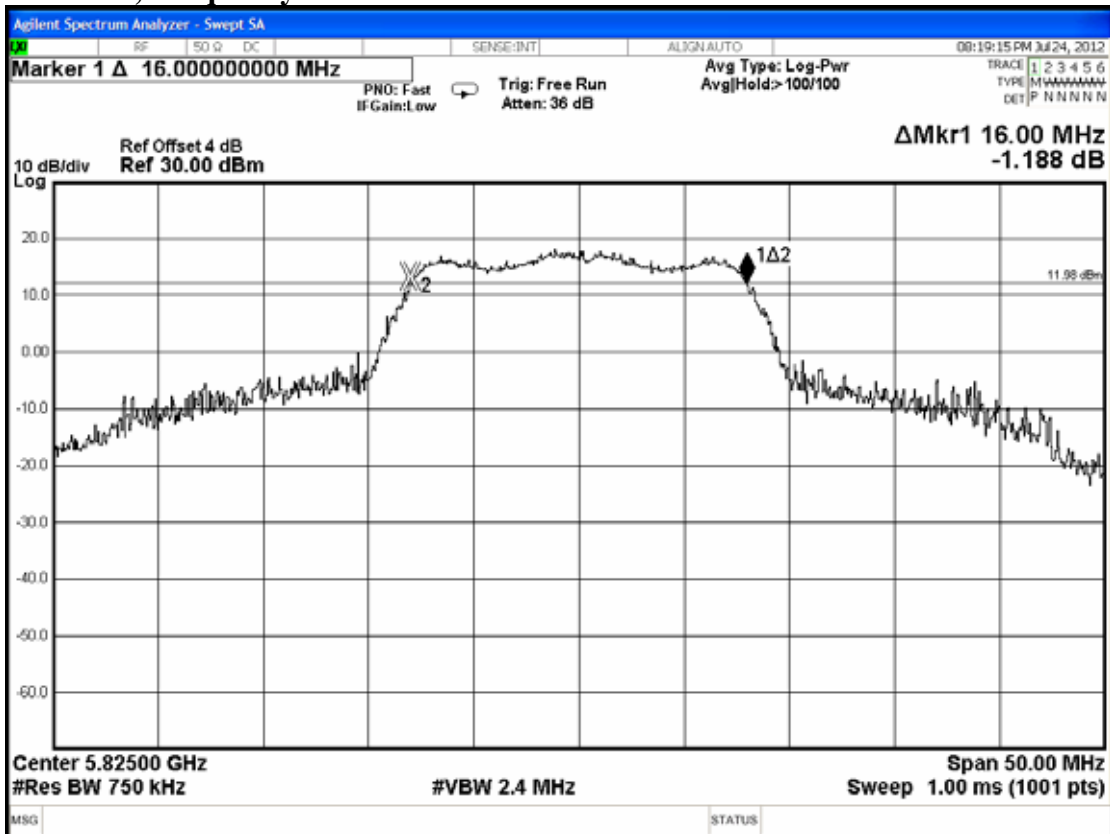


802.11n-HT20, Frequency: 2412MHz

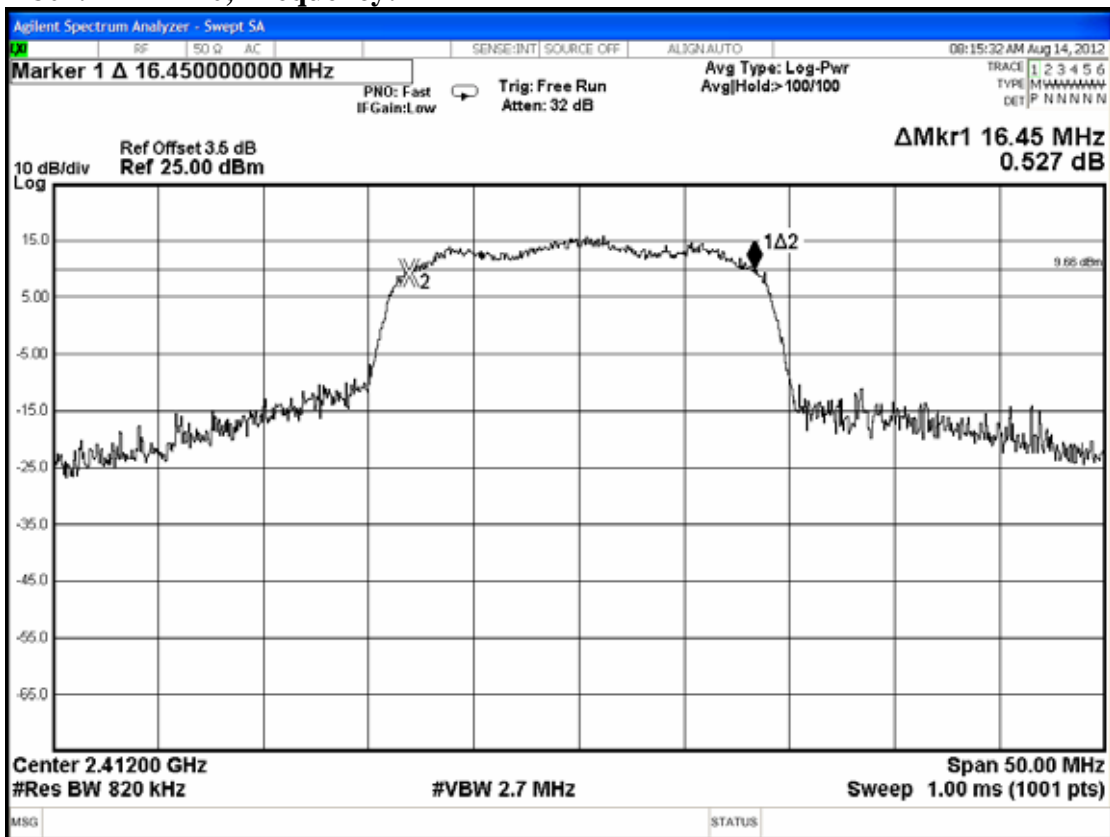


802.11n-HT20, Frequency: 2437MHz

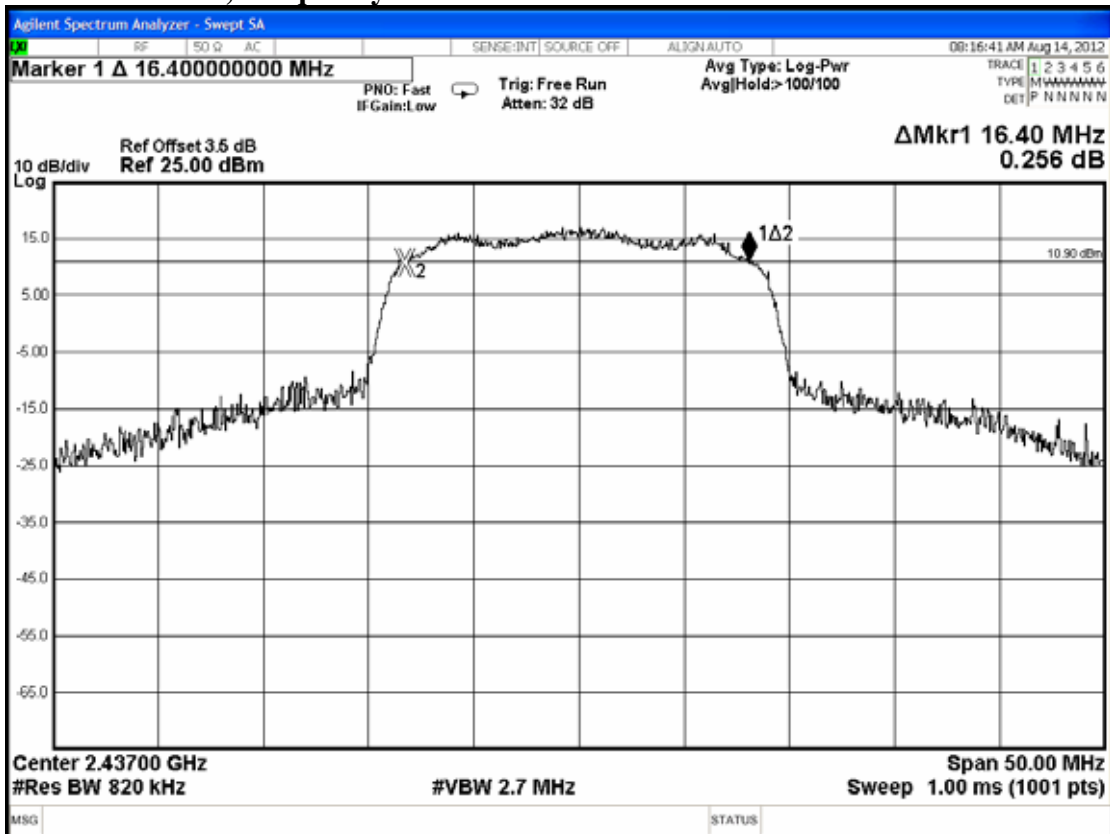


802.11n-HT20, Frequency: 2462MHz

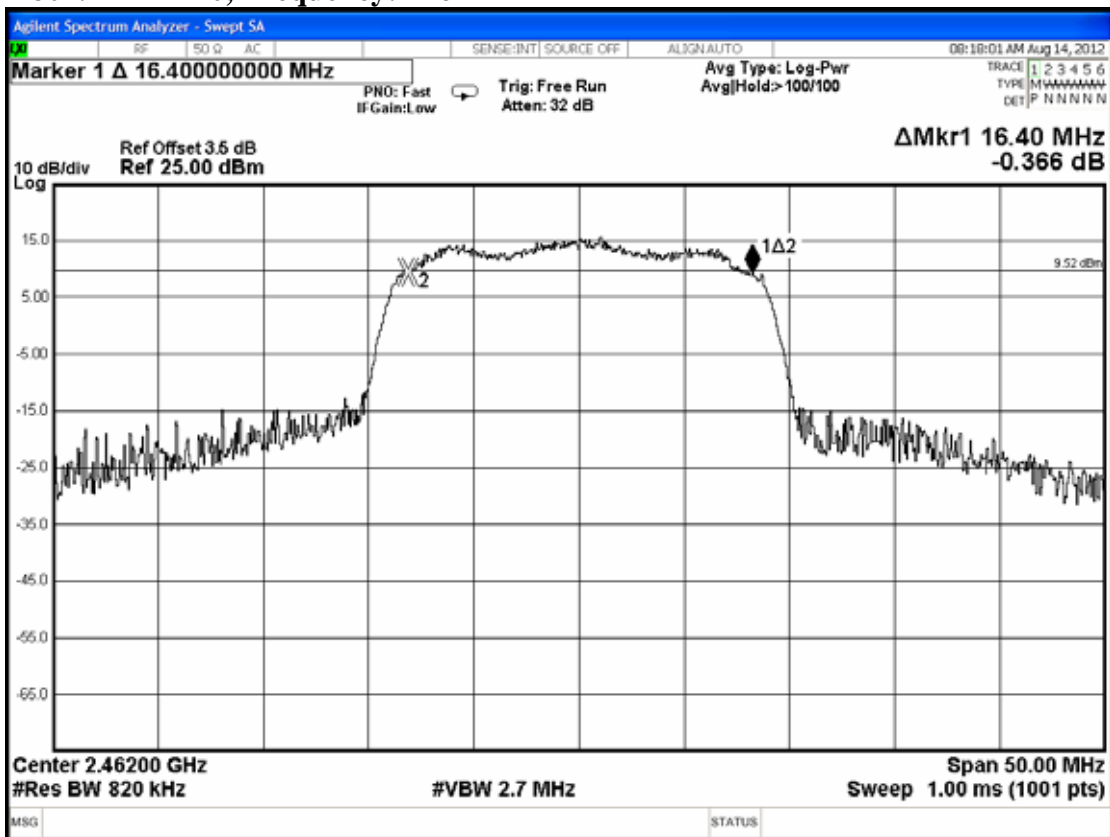


802.11n-HT20, Frequency: 5745MHz

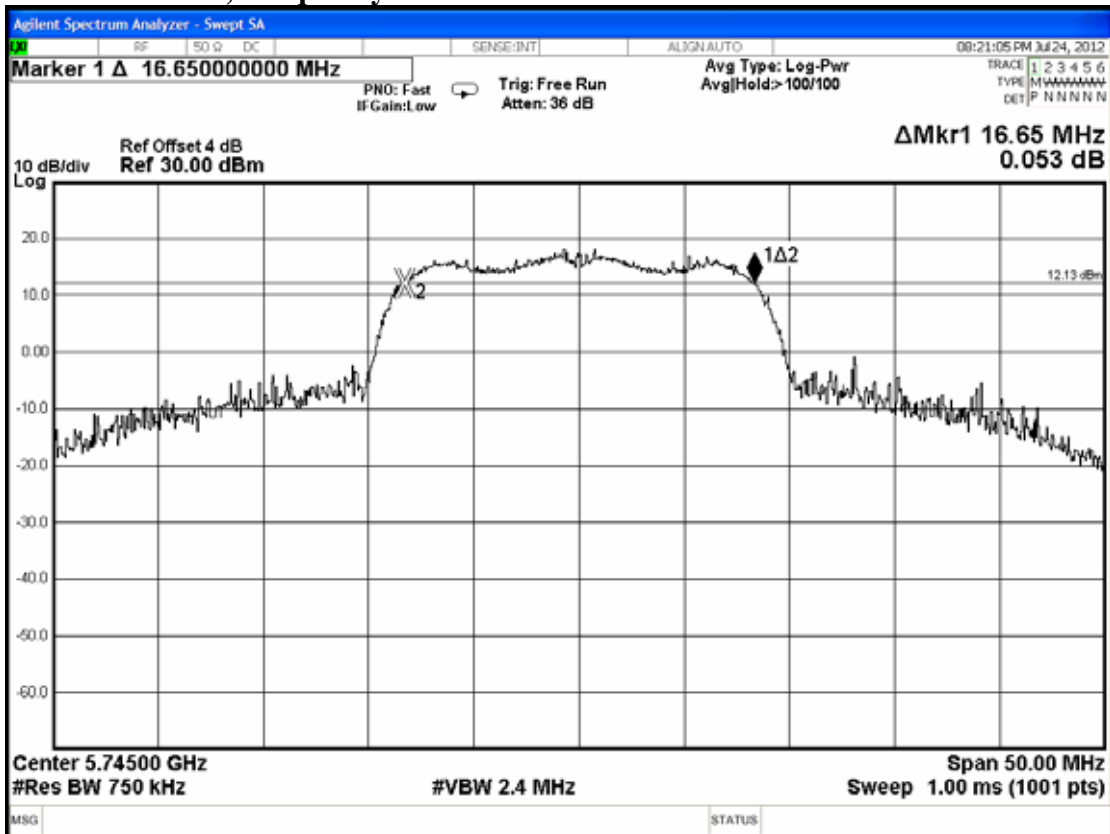


802.11n-HT20, Frequency: 5785MHz

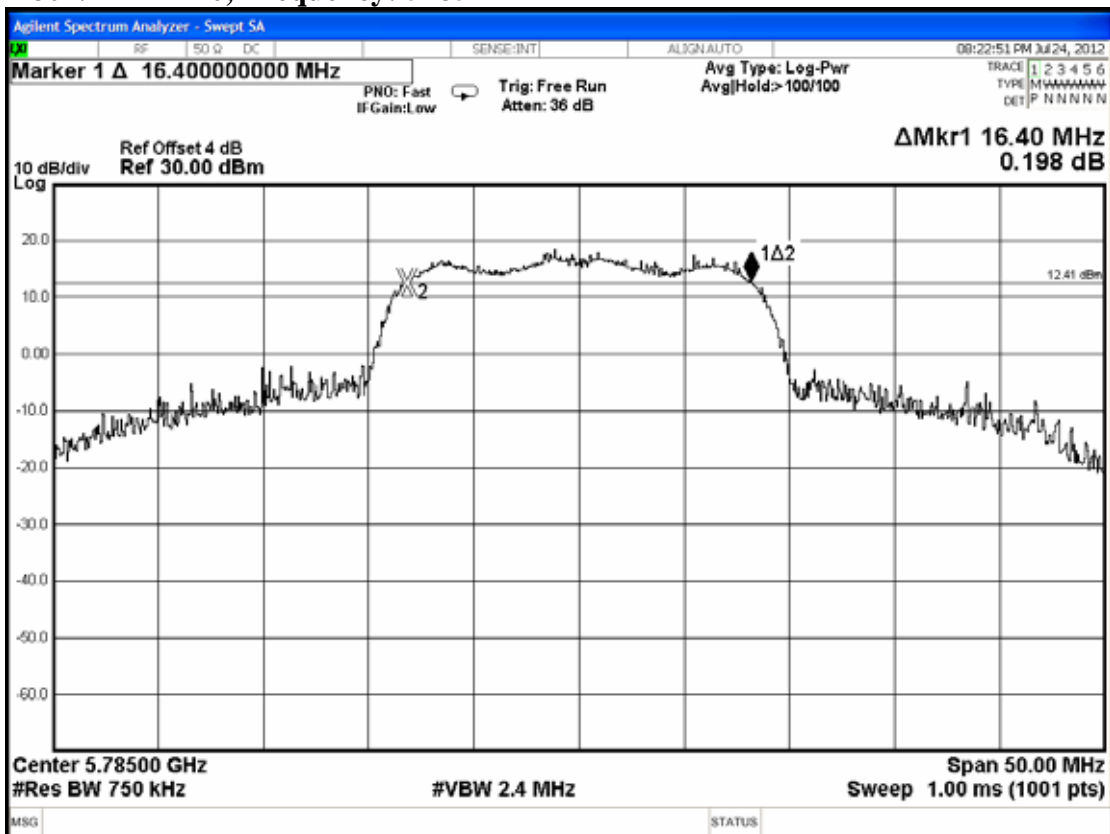


802.11n-HT20, Frequency: 5825MHz

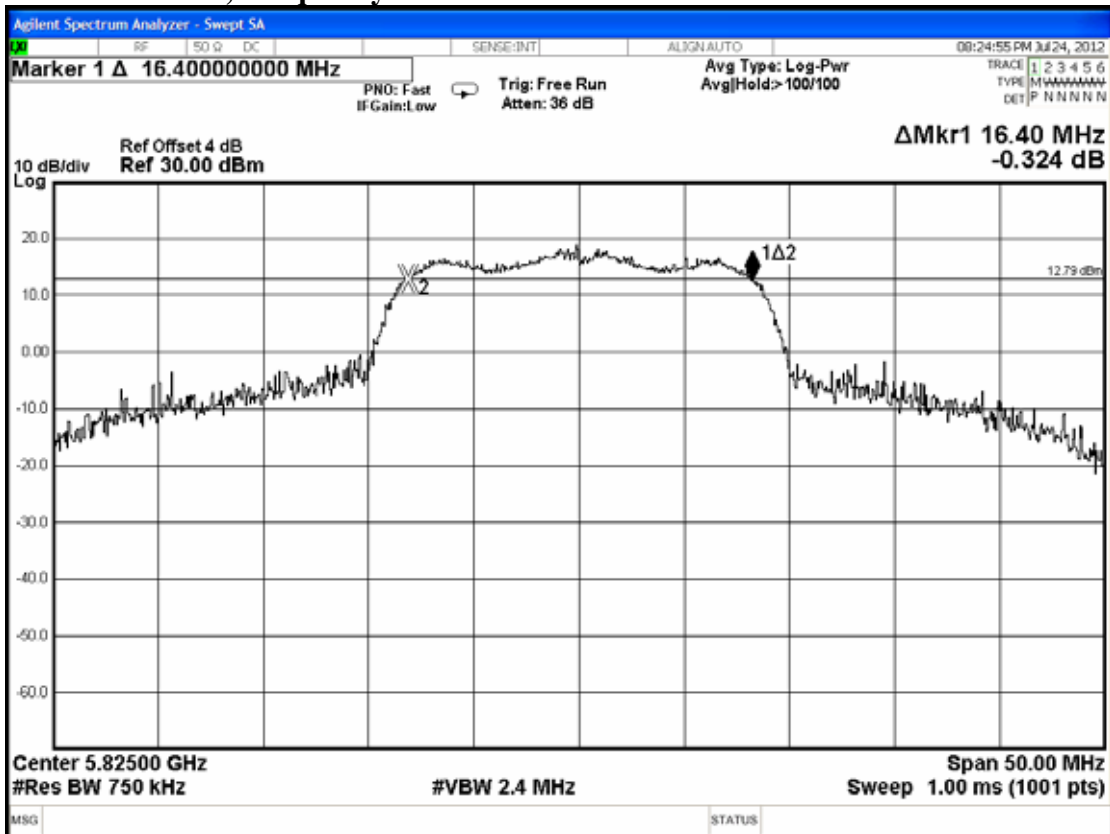


802.11n-HT40, Frequency: 2422MHz

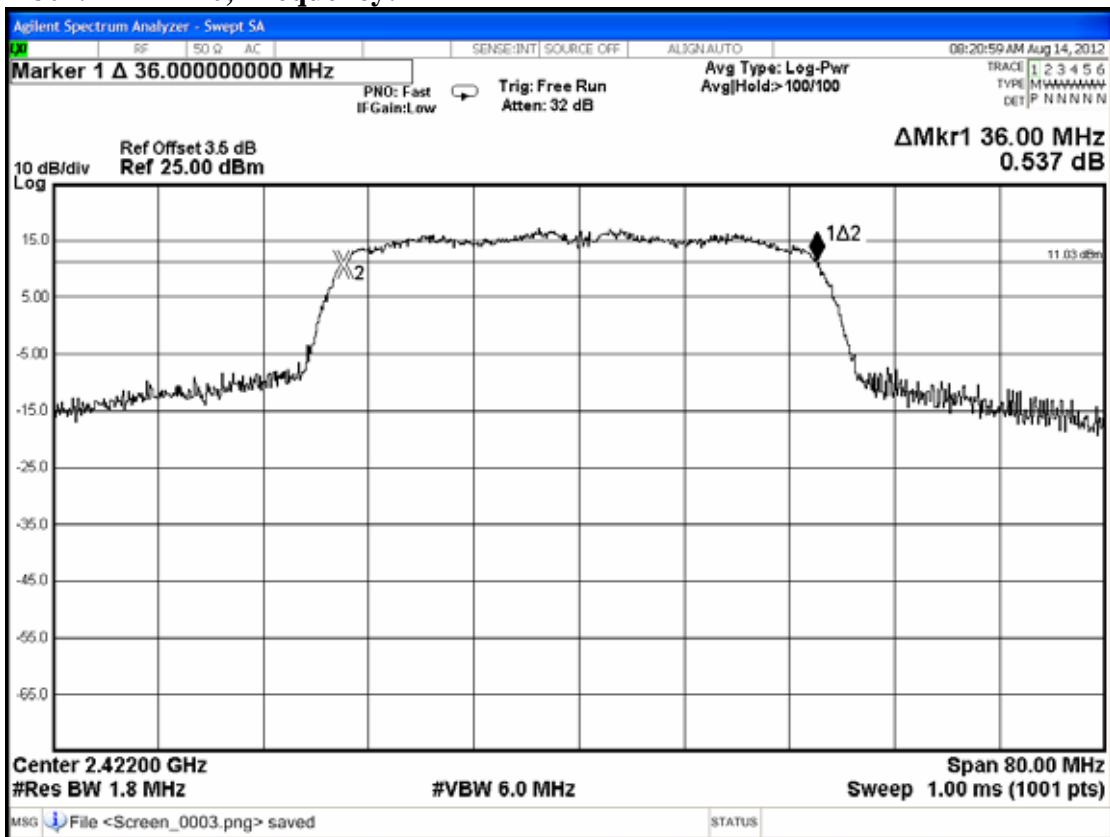


802.11n-HT40, Frequency: 2437MHz

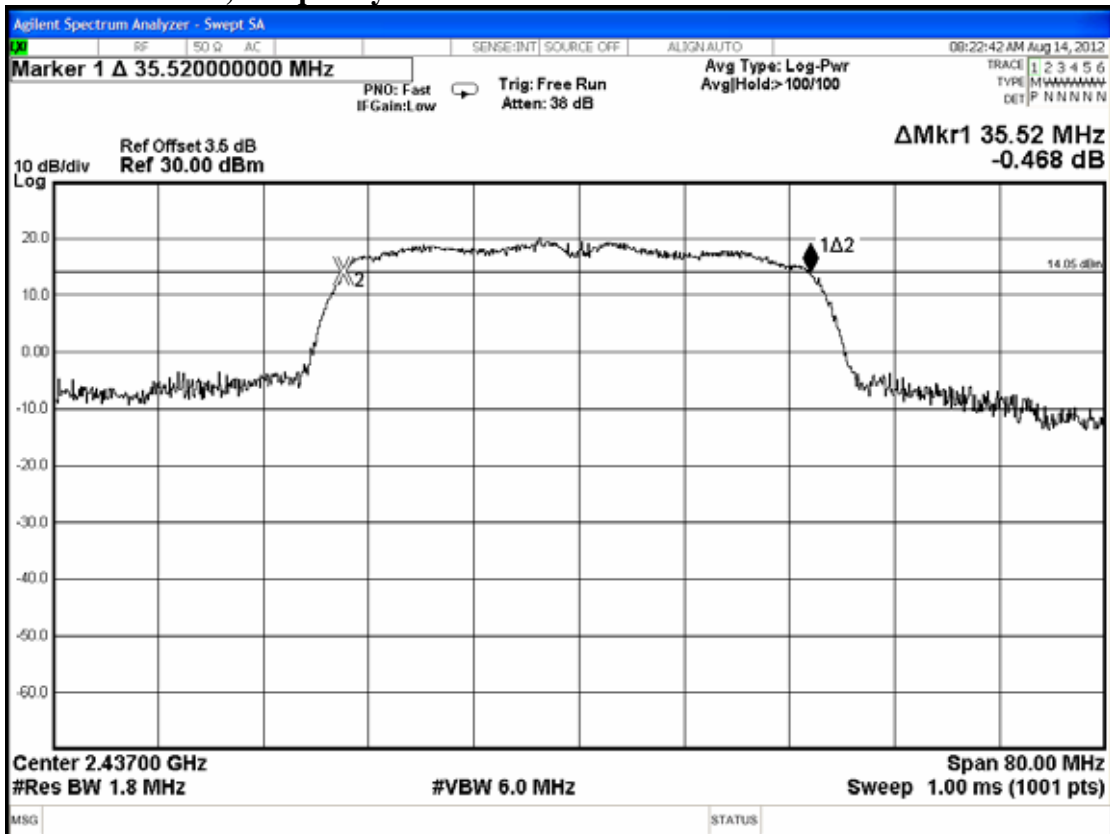


802.11n-HT40, Frequency: 2452MHz

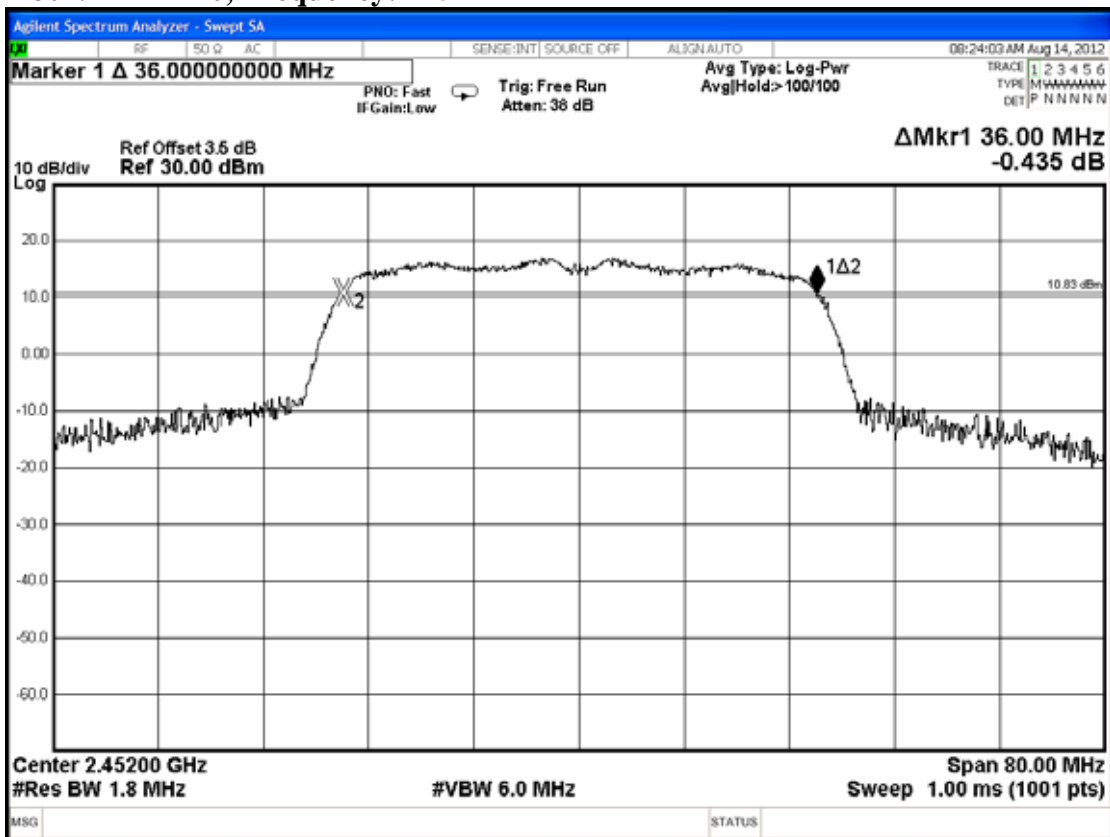

802.11n-HT40, Frequency: 5755MHz

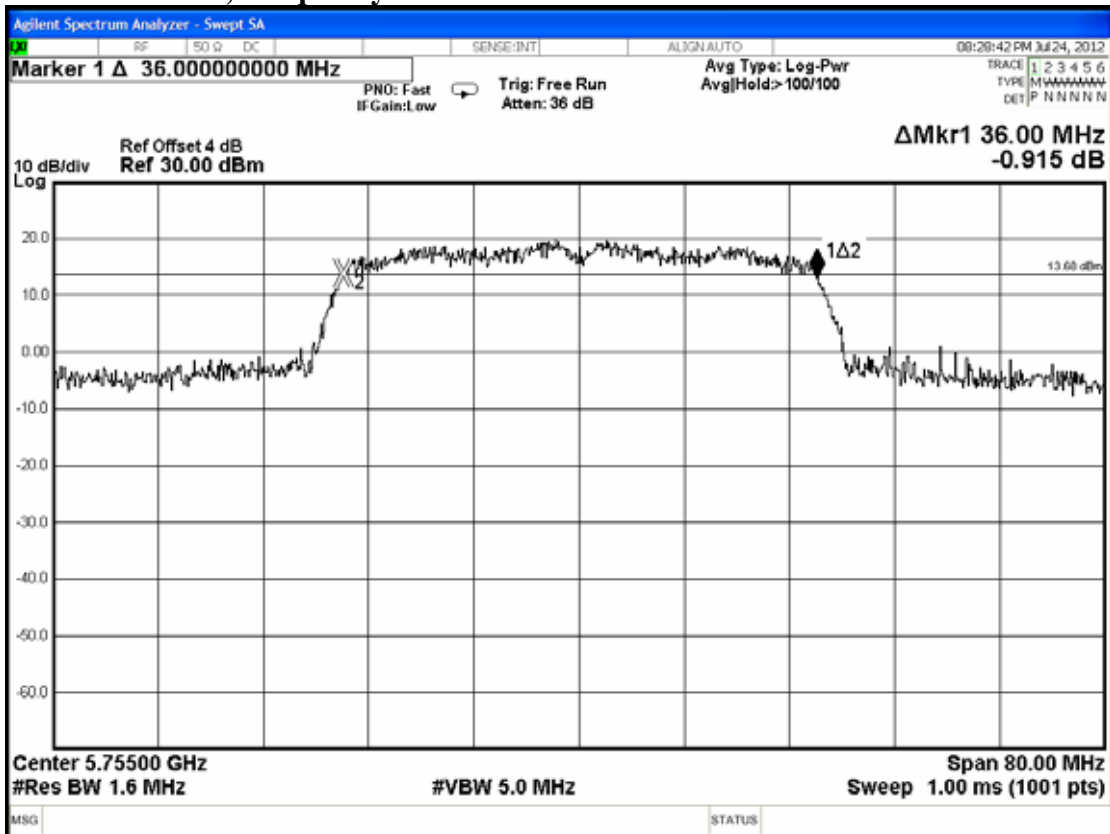

802.11n-HT40, Frequency: 5795MHz

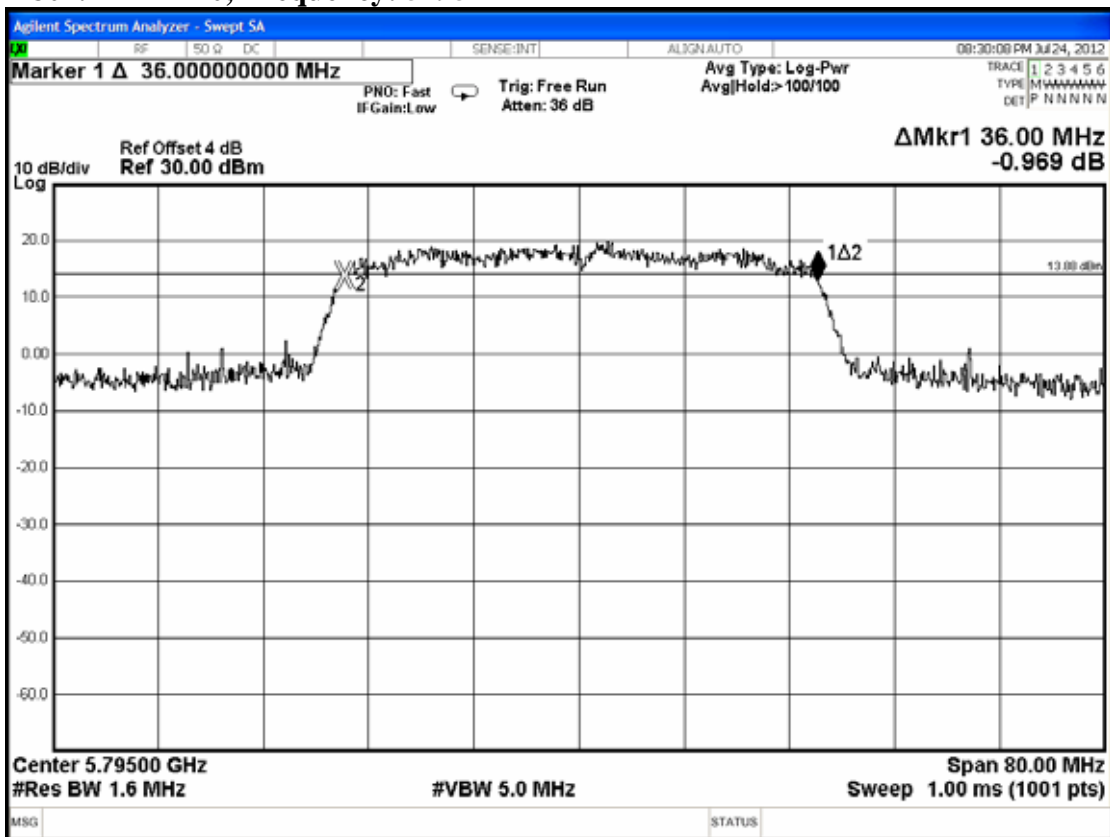


5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Power Meter	Anritsu	ML2487A	6K00005406	Feb. 13, 12'	Feb. 12, 13'
2.	Power Sensor	Anritsu	MA2491A	030873	Feb. 13, 12'	Feb. 12, 13'

5.2. Block Diagram of Test Setup

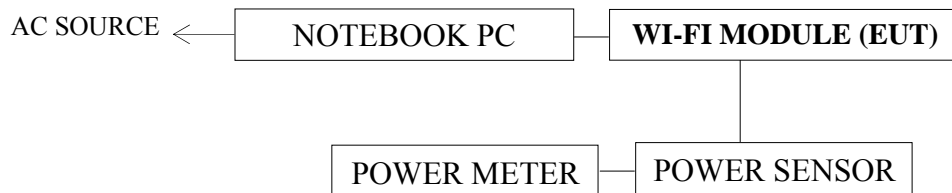

5.3. Specification Limits (§15.247(b)-(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz & 5725-5850MHz is : 1Watt. (30dBm)

5.4. Operating Condition of EUT

The test program “Broadcom WL Command” was used to enable the EUT to transmit data at different channel frequency individually.

5.5. Test Procedure

The transmitter output was connected to the power sensor and record the reading of power meter.

The measurement guideline was according to KDB 558074 D01.

5.6. Test Results

PASSED. All the test results are listed below.

(Test Date : Jul. 24, 2012 Temperature : 26 Humidity : 50%)

(Test Date : Aug. 14, 2012 Temperature : 25 Humidity : 51%)

5.6.1. For 802.11b/802.11g/802.11a

Mode	Type of Network	Channel	Frequency	Peak Output Power (dBm)	Power Setting
1.	802.11b	CH 1	2412MHz	17.81	64
2.		CH 6	2437MHz	17.76	64
3.		CH 11	2462MHz	17.52	64

[Limit: 1Watt. (30dBm)]

5.6.2. For 802.11n-HT20/802.11n-HT40

Mode	Type of Network	Channel	Frequency	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Power Setting
				Ant.0	Ant.1		
1.	802.11g	CH 1	2412MHz	11.16	11.12	14.15	42
2.		CH 6	2437MHz	15.67	16.15	18.93	62
3.		CH 11	2462MHz	14.4	14.39	17.41	58
4.	802.11a	CH 149	5745MHz	16.34	16.47	19.42	66
5.		CH 157	5785MHz	16.09	16.61	19.37	66
6.		CH 165	5825MHz	16.02	16.41	19.23	66
7.	802.11n-HT20	CH 1	2412MHz	10.00	9.85	12.94	36
8.		CH 6	2437MHz	15.77	16.23	19.02	62
9.		CH 11	2462MHz	14.01	14.01	17.02	56
10.	802.11n-HT20	CH 149	5745MHz	16.29	16.4	19.36	66
11.		CH 157	5785MHz	16.32	16.44	19.39	66
12.		CH 165	5825MHz	16.51	16.48	19.51	66
13.	802.11n-HT40	CH 3	2422MHz	10.71	10.94	13.84	40
14.		CH 6	2437MHz	16.23	16.5	19.38	64
15.		CH 9	2452MHz	13.11	12.86	16.00	50
16.	802.11n-HT40	CH 151	5755MHz	16.42	16.63	19.54	66
17.		CH 159	5795MHz	16.43	16.28	19.37	66

6. EMISSION LIMITATIONS MEASUREMENT

Pursuant to KDB558074 D01 that emission levels below limits specified in 15.209 would not be required.

7. BAND EDGES MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits [§15.247(c), RSS-210 §A8.5]

7.3.1. The highest level should be at least 20 dB below that in the 100kHz bandwidth.

7.3.2. The reference level for determining limit of emission limitations is according to the value measured indicated in plots at section 8.6.

7.4. Operating Condition of EUT

The test program “Broadcom WL Command” was used to enable the EUT to transmit data at different channel frequency individually.

7.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to KDB 558074 D01.

Pursuant to KDB 662911, we performed conducted tests for both antenna chains and submit test data measured on chain 0 as worse performance.

7.6. Test Results

PASSED. All the test results are attached in next pages.

Pursuant to KDB 662911, the test result has been included 3 dB is calculated from $10\log(N)$, where N is the number of outputs.

(Test Date : Aug. 09, 2012 Temperature : 26 Humidity : 52%)

(Test Date : Aug. 14, 2012 Temperature : 25 Humidity : 51%)

802.11b

Below Band edge: The highest emission level is -35.069dBm on 2.39990GHz.

Upper Band edge : The highest emission level is -50.159dBm on 2.48360GHz.

802.11g

Below Band edge: The highest emission level is -31.388dBm on 2.39990GHz.

Upper Band edge : The highest emission level is -38.213dBm on 2.48360GHz.

802.11a

Below Band edge: The highest emission level is -22.854dBm on 5.72500GHz.

Upper Band edge : The highest emission level is -31.644dBm on 5.85000GHz.

802.11n-HT20(2.4GHz)

Below Band edge: The highest emission level is -25.651dBm on 2.39990GHz.

Upper Band edge : The highest emission level is -39.687dBm on 2.48360GHz.

802.11n-HT20(5.8GHz)

Below Band edge: The highest emission level is -21.530dBm on 5.72500GHz.

Upper Band edge : The highest emission level is -32.831dBm on 5.85000GHz.

802.11n-HT40(2.4GHz)

Below Band edge: The highest emission level is -25.601dBm on 2.39990GHz.


Upper Band edge : The highest emission level is -35.747dBm on 2.48360GHz.

802.11n-HT40(5.8GHz)


Below Band edge: The highest emission level is -19.473dBm on 5.7250GHz.

Upper Band edge : The highest emission level is -29.020dBm on 5.85500GHz.


802.11b Below Band edge

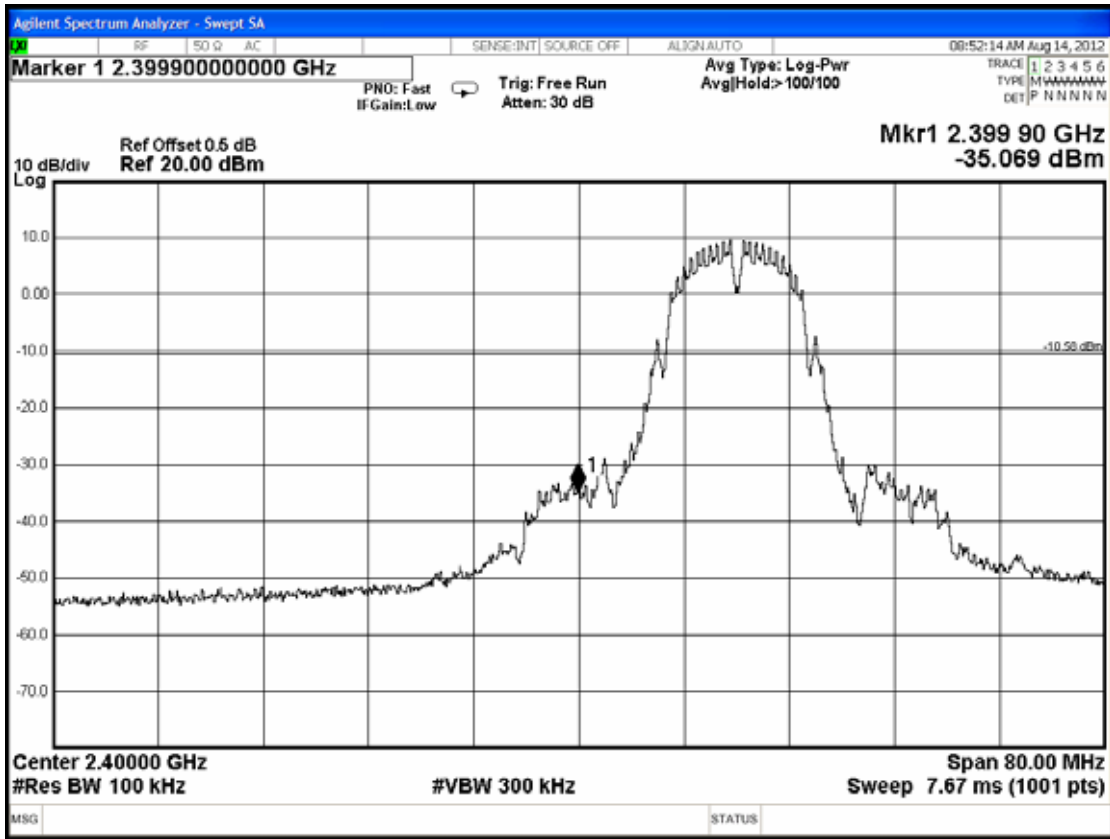


Upper Band edge

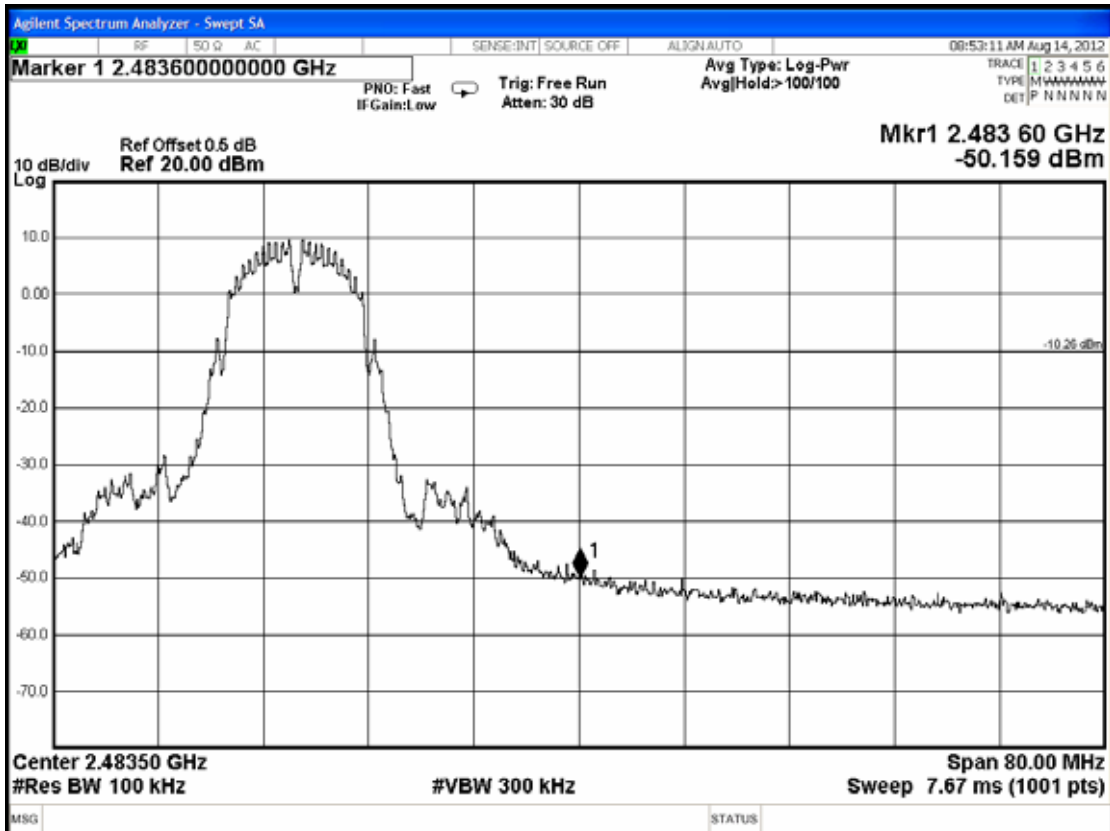


802.11g Below Band edge

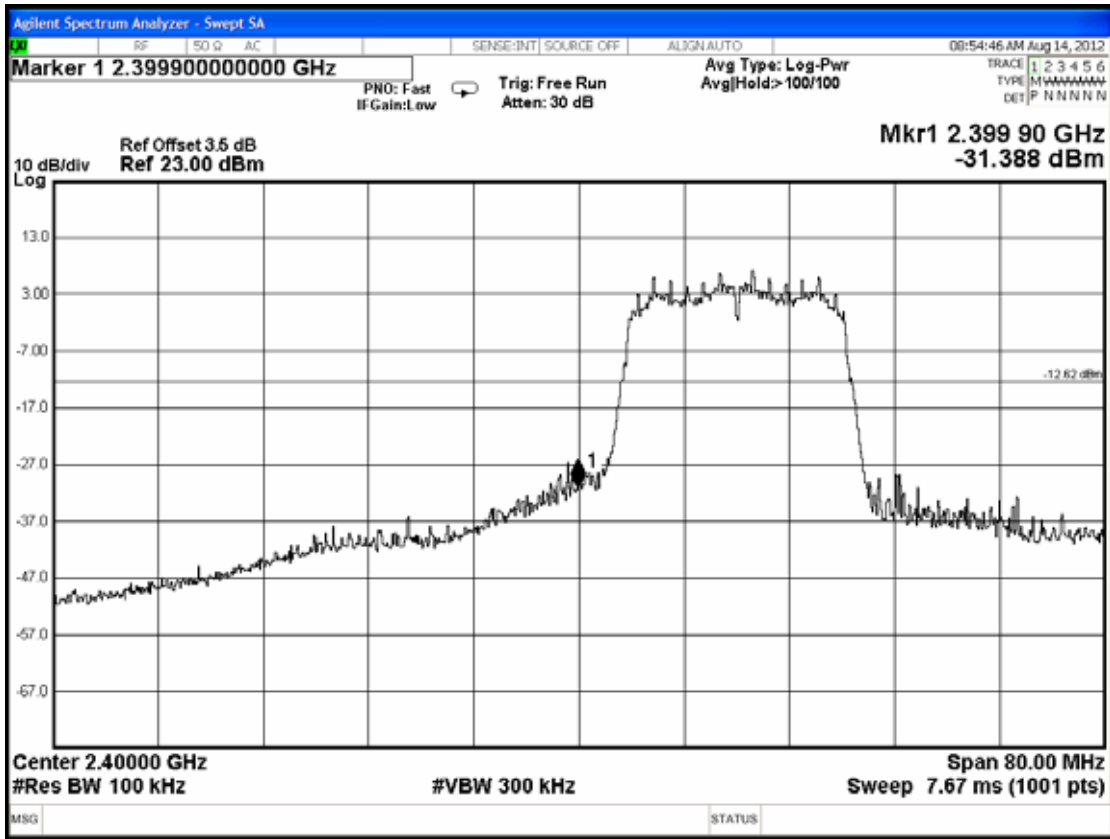


Upper Band edge

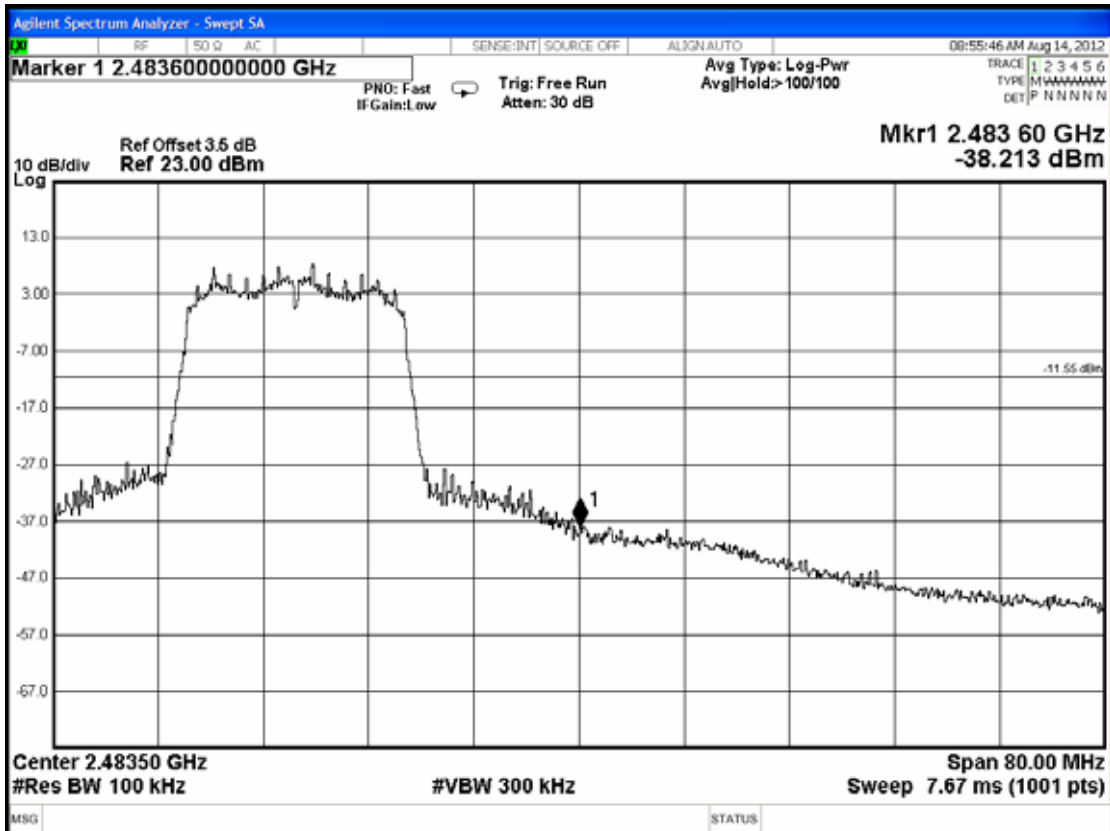


802.11a Below Band edge

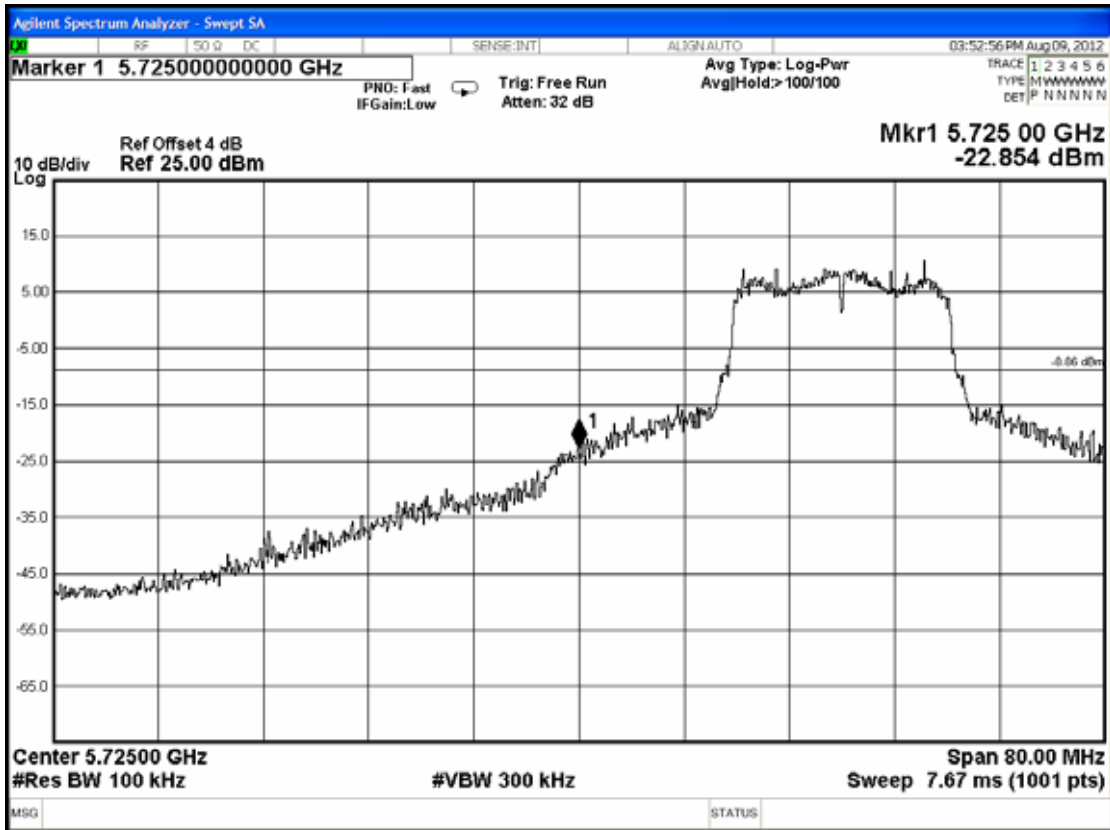


Upper Band edge

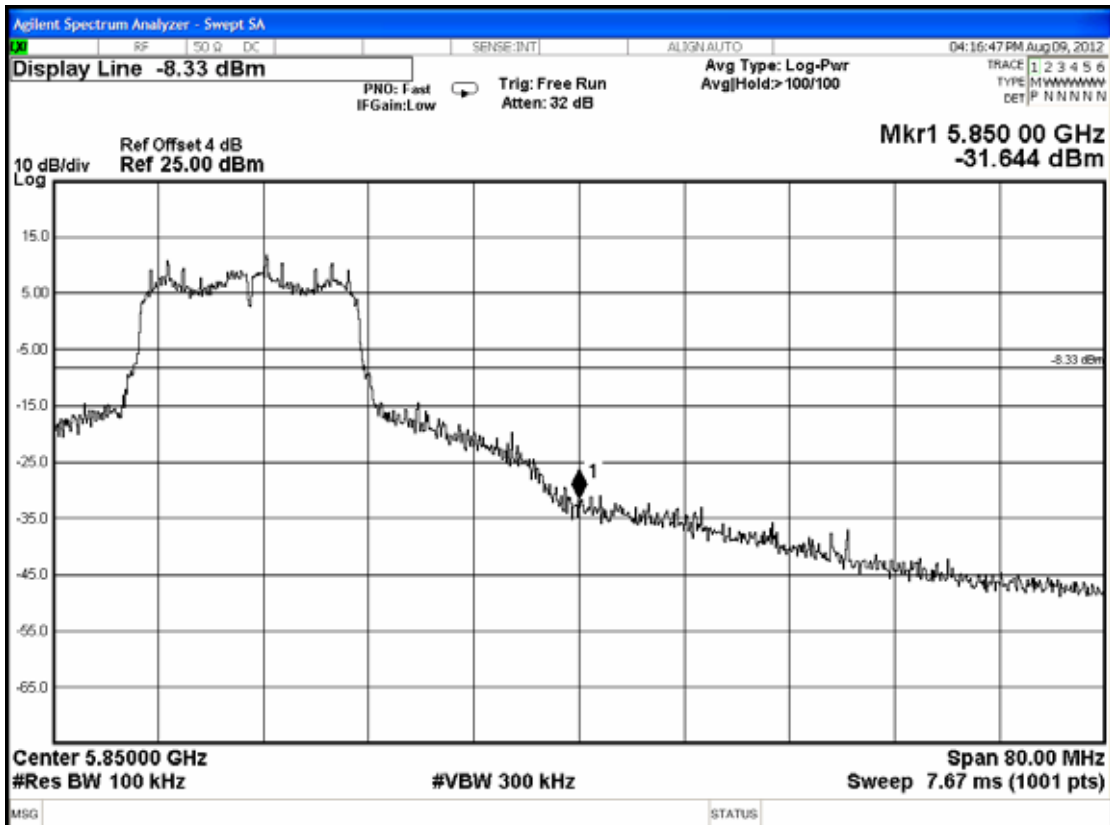


802.11n-HT20(2.4GHz) Below Band edge

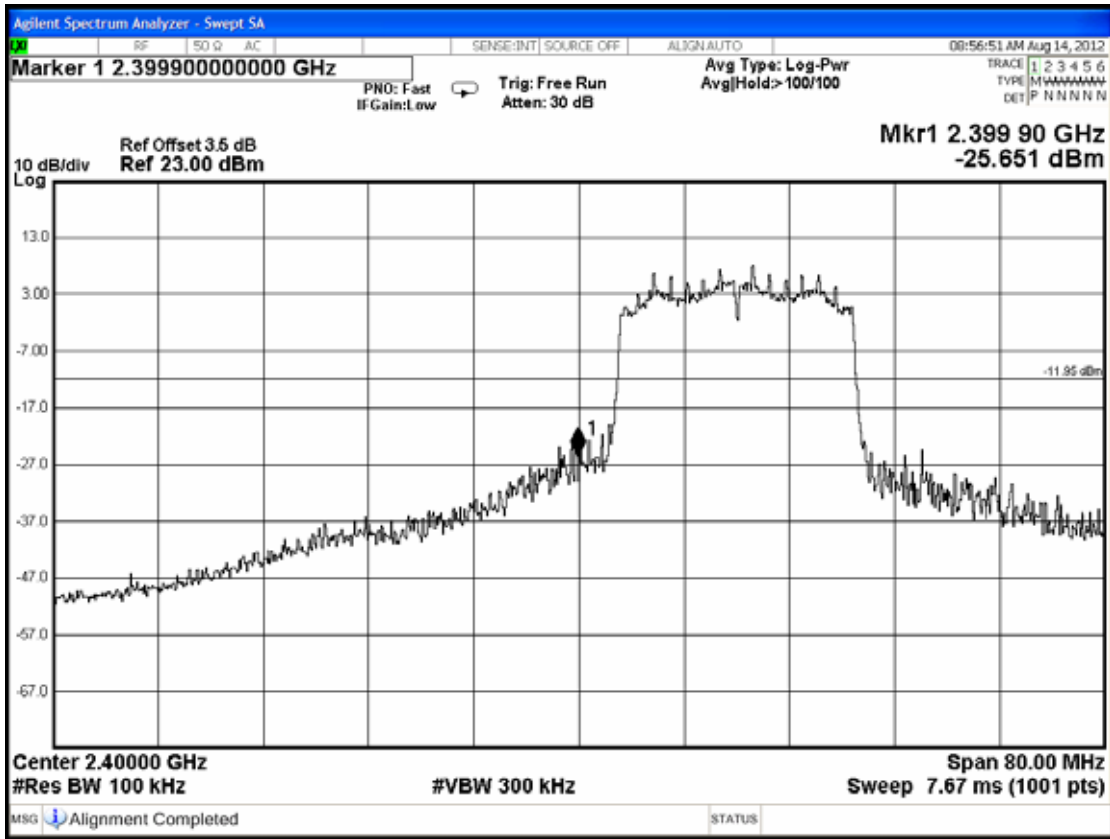


Upper Band edge

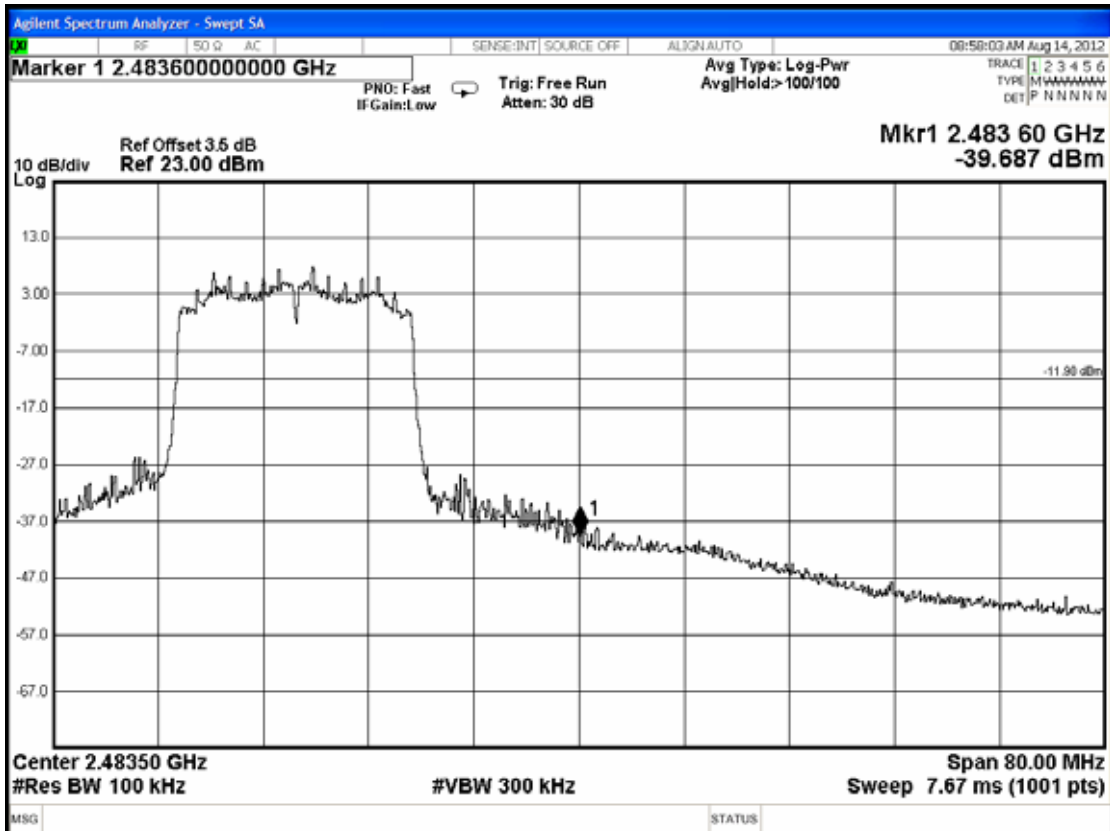


**802.11n-HT20(5.8GHz)
 Below Band edge**

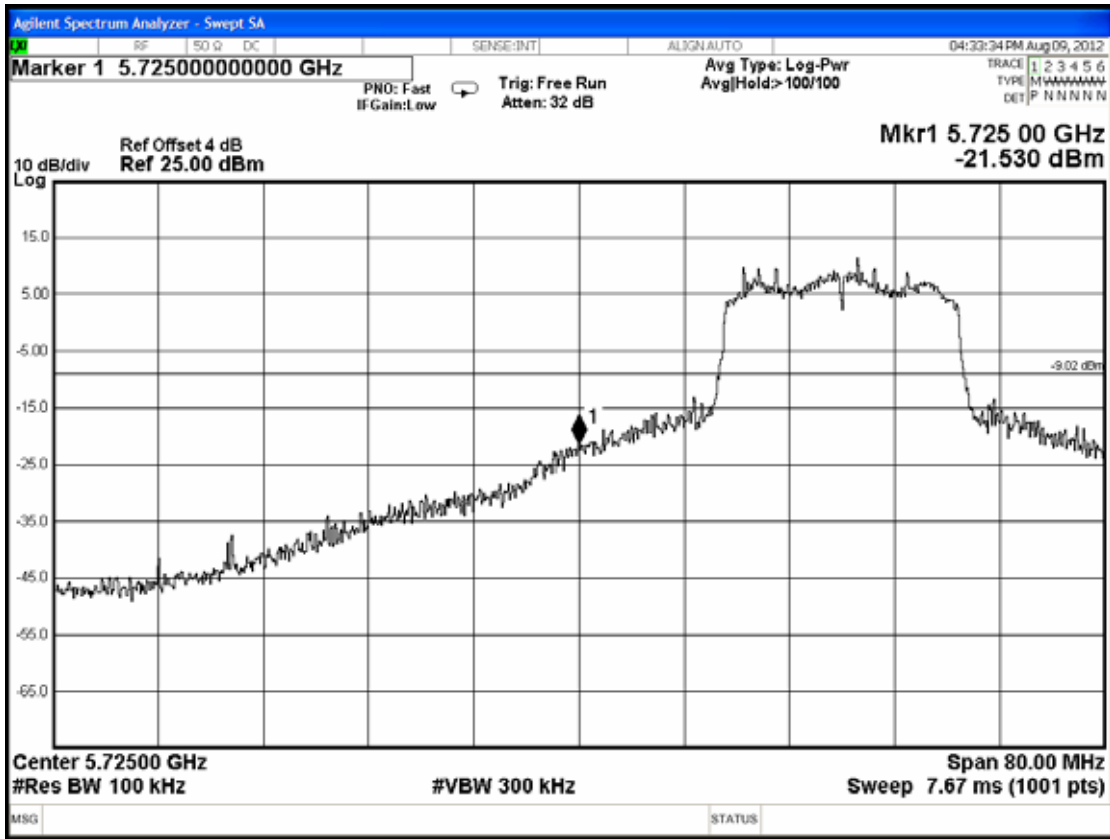


Upper Band edge

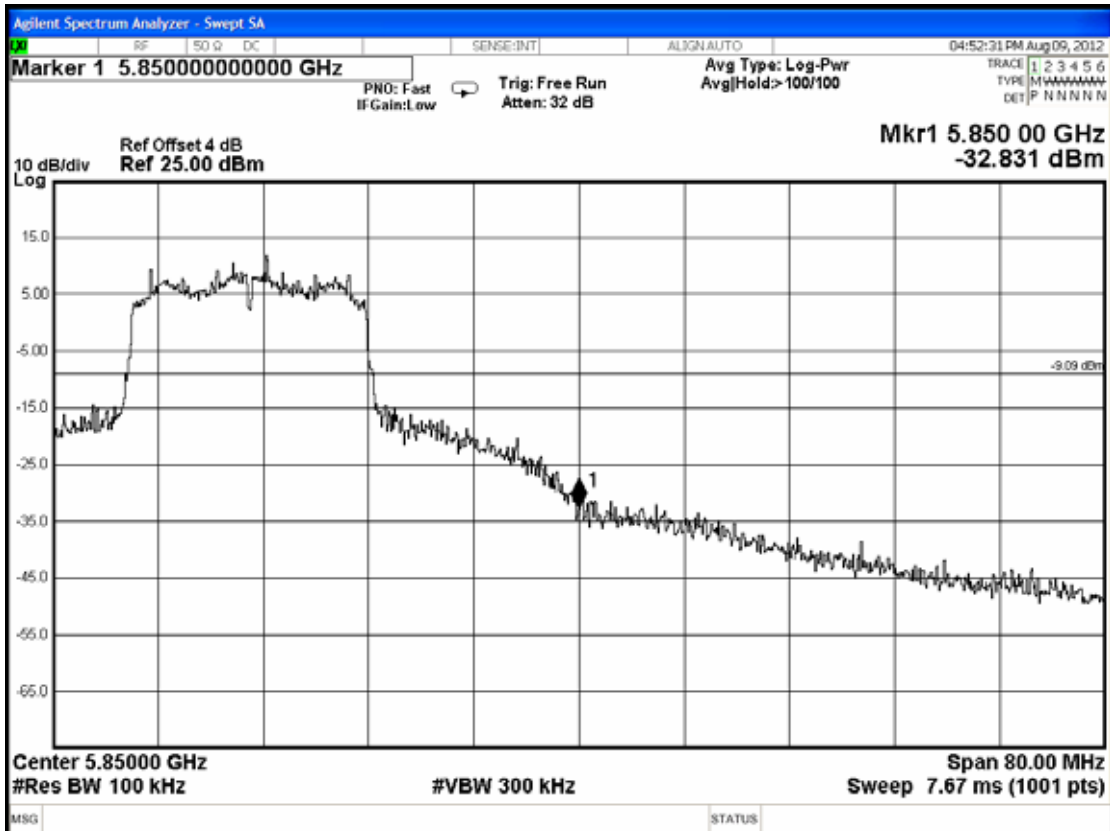


802.11n-HT40(2.4GHz) Below Band edge

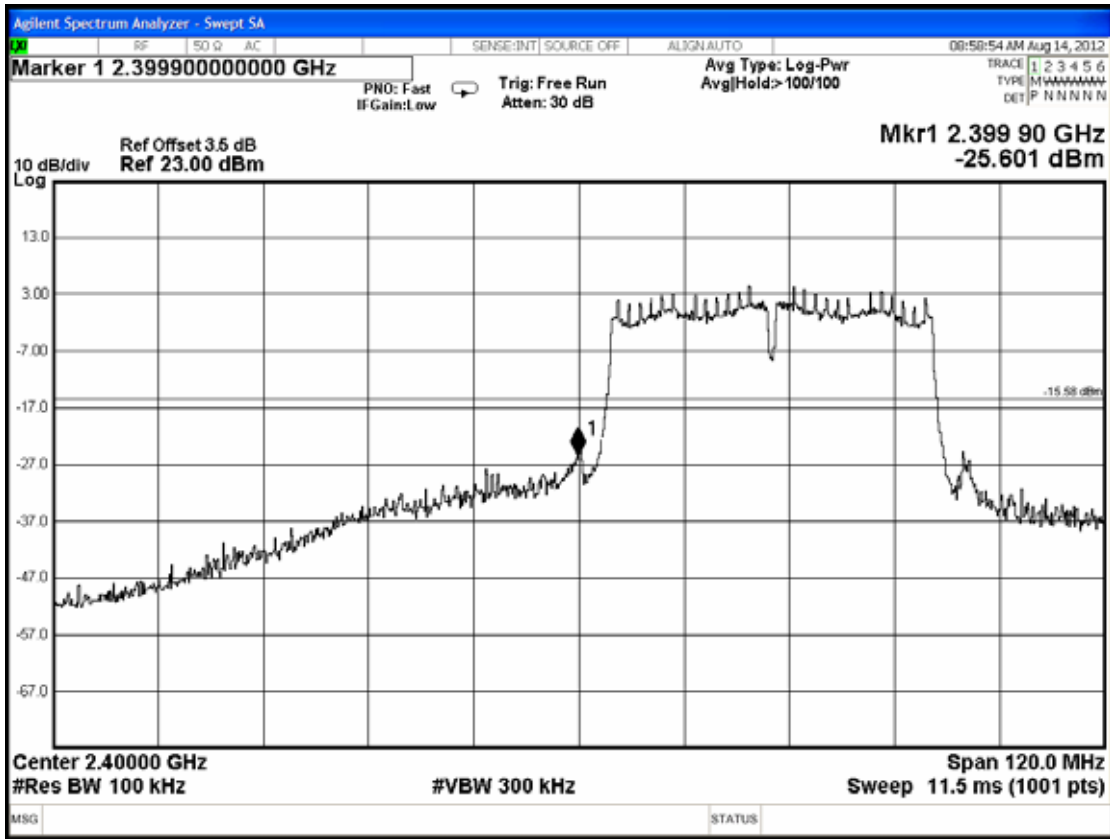


Upper Band edge

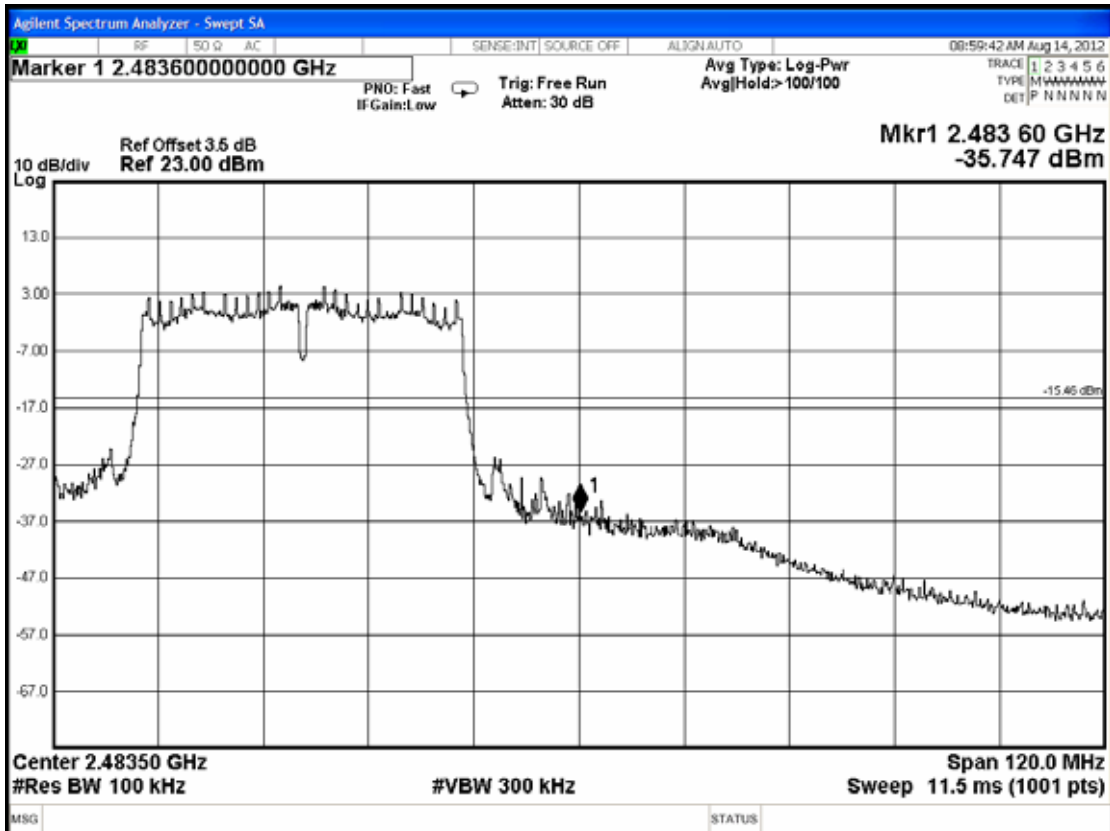

**802.11n-HT40(5.8GHz)
 Below Band edge**

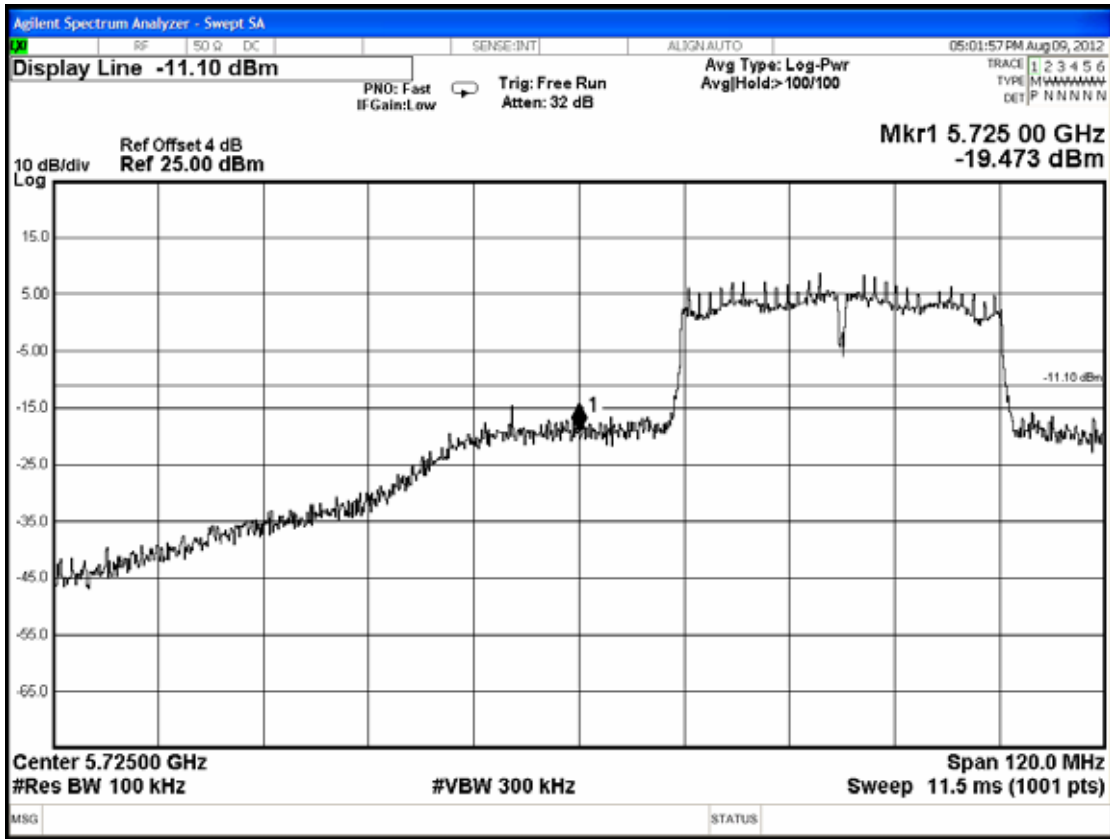

Upper Band edge

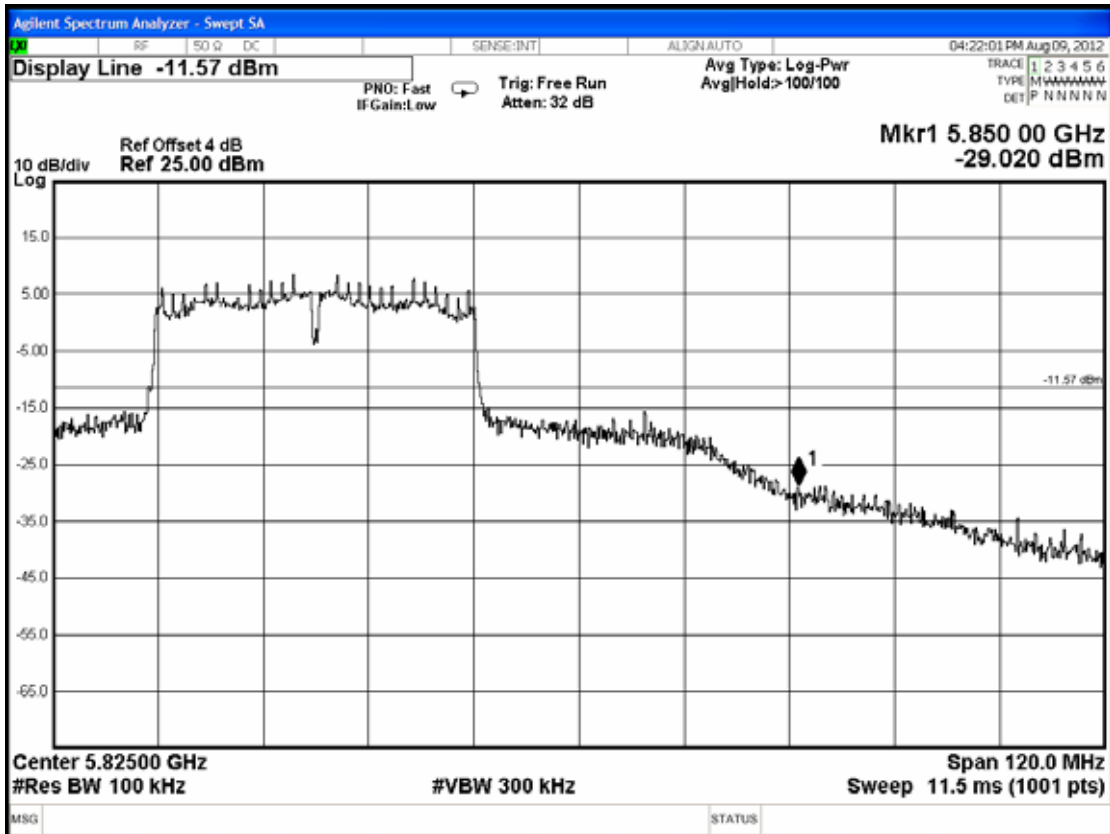

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits [§15.247(d), RSS-210 §A8.2 (b)]

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

8.4. Operating Condition of EUT

The test program “Broadcom WL Command” was used to enable the EUT to transmit data at different channel frequency individually.

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 100kHz RBW and ≥ 300 kHz VBW, set sweep time = Auto.

The measurement guideline was according to KDB 558074 D01.

Pursuant to KDB 662911, we performed conducted tests for both antenna chains and submit test data measured on chain 0 as worse performance.

8.6. Test Results

PASSED. All the test results are attached in next pages.

Pursuant to KDB 662911, the test result has been included 3 dB is calculated from $10\log(N)$, where N is the number of outputs.

(Test Date : Aug. 09, 2012 Temperature : 26 Humidity : 50%)

(Test Date : Aug. 14, 2012 Temperature : 25 Humidity : 51%)


(Test Date : Aug. 21, 2012 Temperature : 24 Humidity : 52%)

8.6.1. For 802.11b/802.11g/802.11a


Mode	Type of Network	Channel	Frequency	Power Spectral Density (dBm)	BWCF (dB)	Final Power Spectral Density (dBm)	Limit (dBm)
1.	802.11b	CH 1	2412MHz	9.419	-15.2	-5.78	8
2.		CH 6	2437MHz	9.461	-15.2	-5.74	8
3.		CH 11	2462MHz	9.737	-15.2	-5.46	8
4.	802.11g	CH 1	2412MHz	7.376	-15.2	-7.82	8
5.		CH 6	2437MHz	9.463	-15.2	-5.74	8
6.		CH 11	2462MHz	8.446	-15.2	-6.75	8
7.	802.11a	CH 149	5745MHz	11.139	-15.2	-4.06	8
8.		CH 157	5785MHz	11.251	-15.2	-3.95	8
9.		CH 165	5825MHz	11.674	-15.2	-3.53	8
10.	802.11n-HT20	CH 1	2412MHz	8.047	-15.2	-7.15	8
11.		CH 6	2437MHz	9.554	-15.2	-5.65	8
12.		CH 11	2462MHz	8.015	-15.2	-7.19	8
13.	802.11n-HT20	CH 149	5745MHz	10.982	-15.2	-4.22	8
14.		CH 157	5785MHz	11.096	-15.2	-4.10	8
15.		CH 165	5825MHz	10.913	-15.2	-4.29	8
16.	802.11n-HT40	CH 3	2422MHz	-0.960	-15.2	-16.16	8
17.		CH 6	2437MHz	7.374	-15.2	-7.83	8
18.		CH 9	2452MHz	4.536	-15.2	-10.66	8
19.	802.11n-HT40	CH 151	5755MHz	8.897	-15.2	-6.30	8
20.		CH 159	5795MHz	8.433	-15.2	-6.77	8

Remark: Final Power Spectral Density=Power Spectral Density + BWCF


802.11b, Frequency: 2412MHz

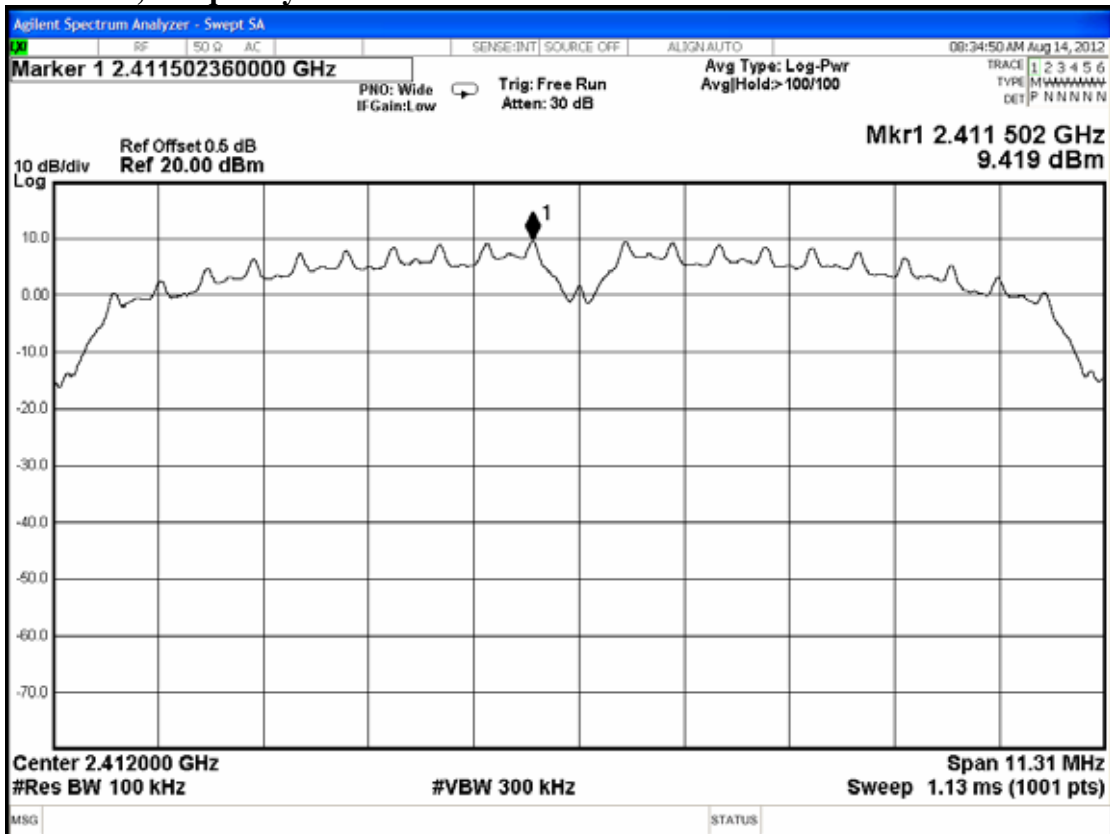


802.11b, Frequency: 2437MHz

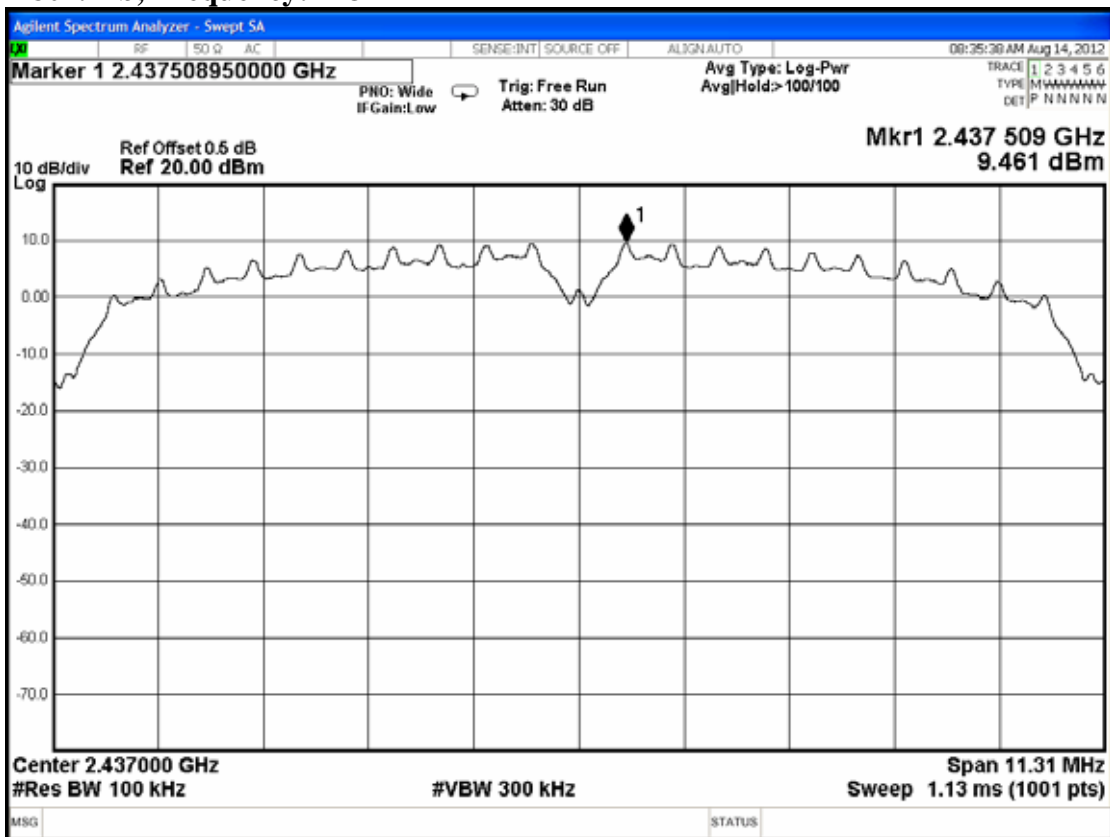


802.11b, Frequency: 2462MHz

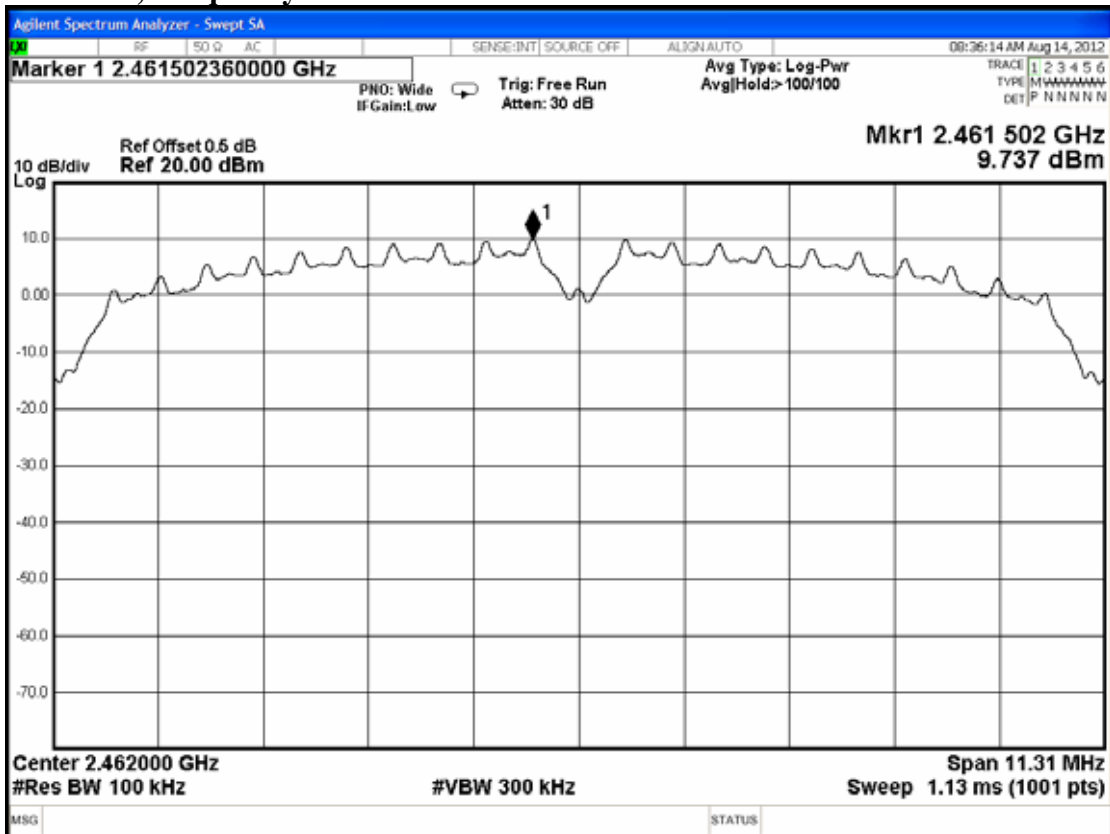


802.11g, Frequency: 2412MHz

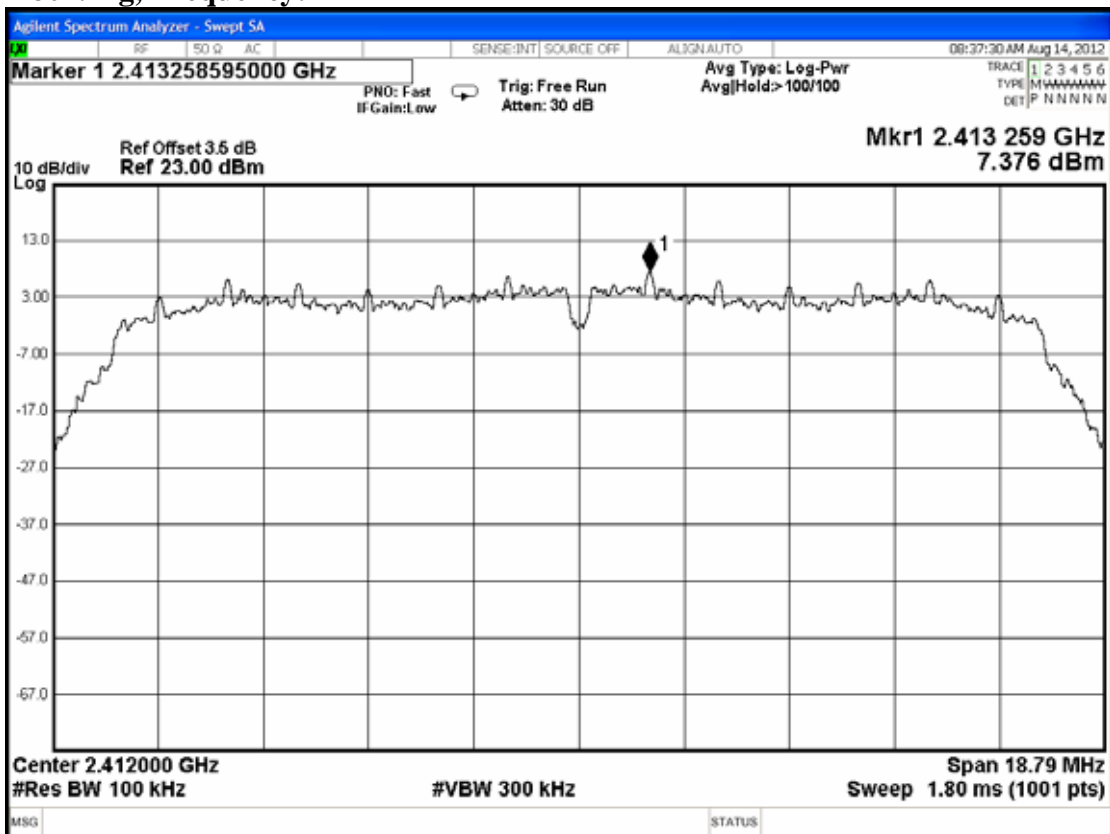


802.11g, Frequency: 2437MHz

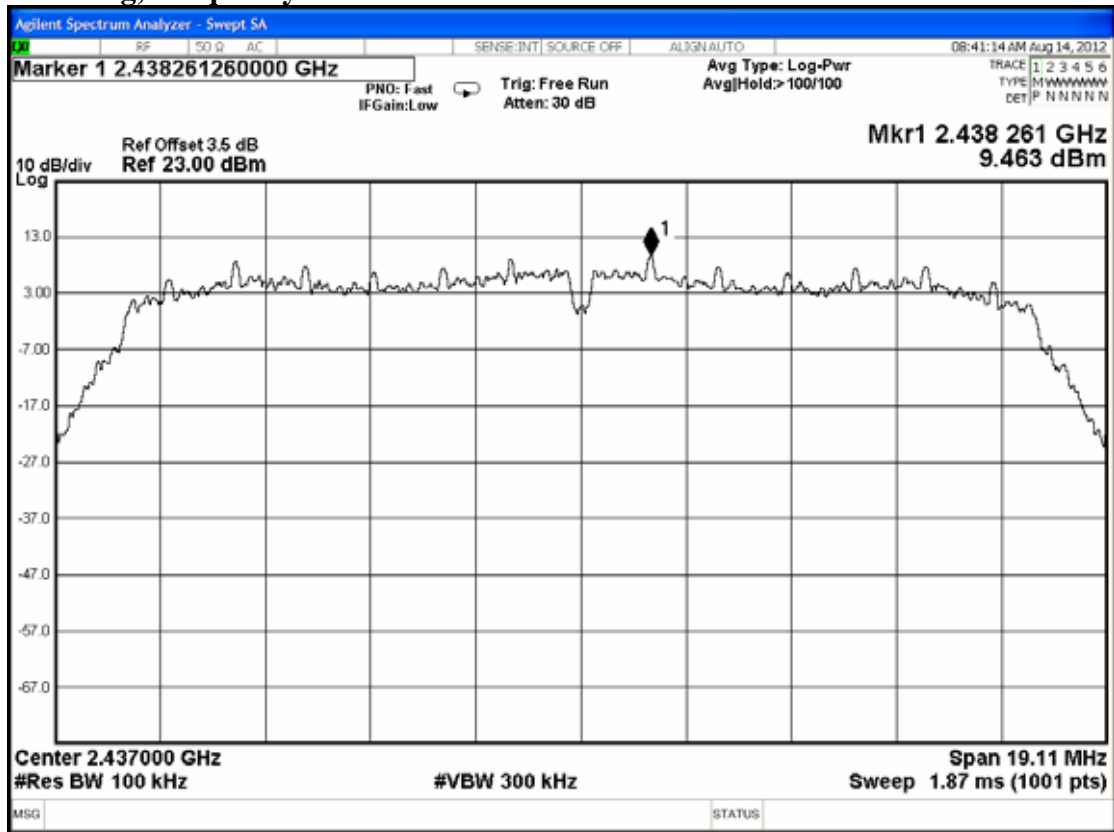


802.11g, Frequency: 2462MHz

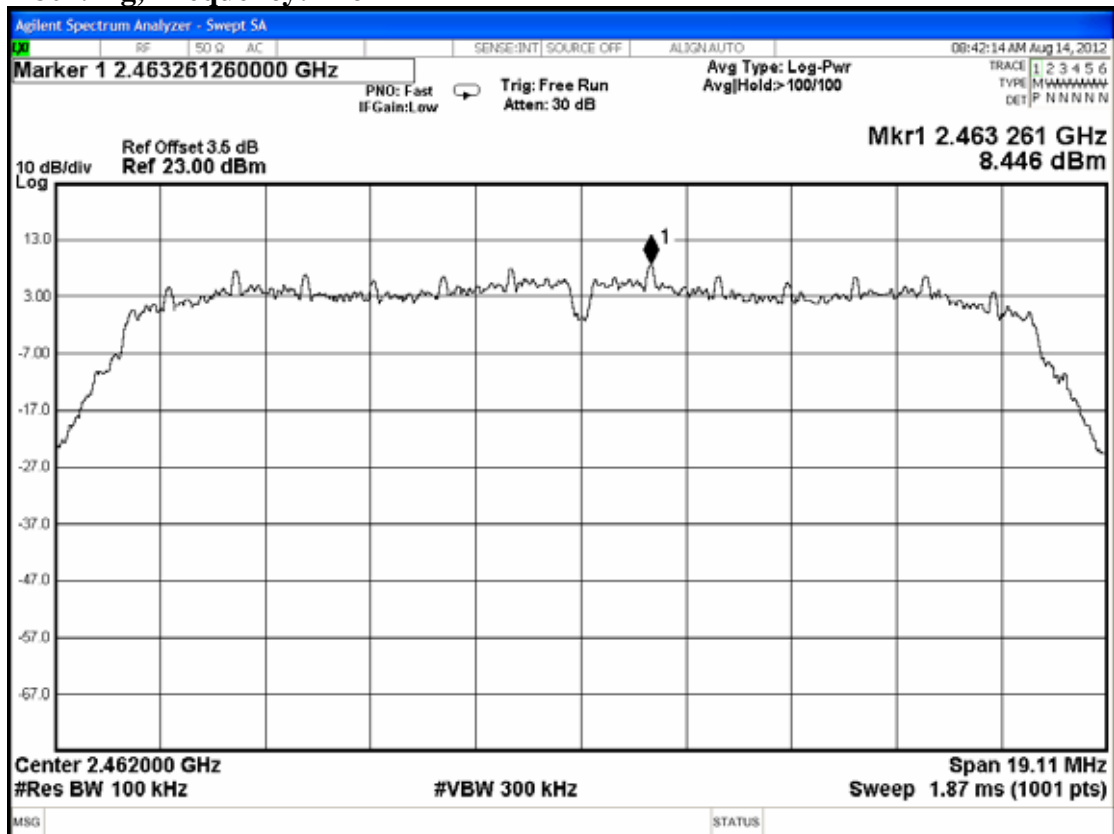


802.11a, Frequency: 5475MHz

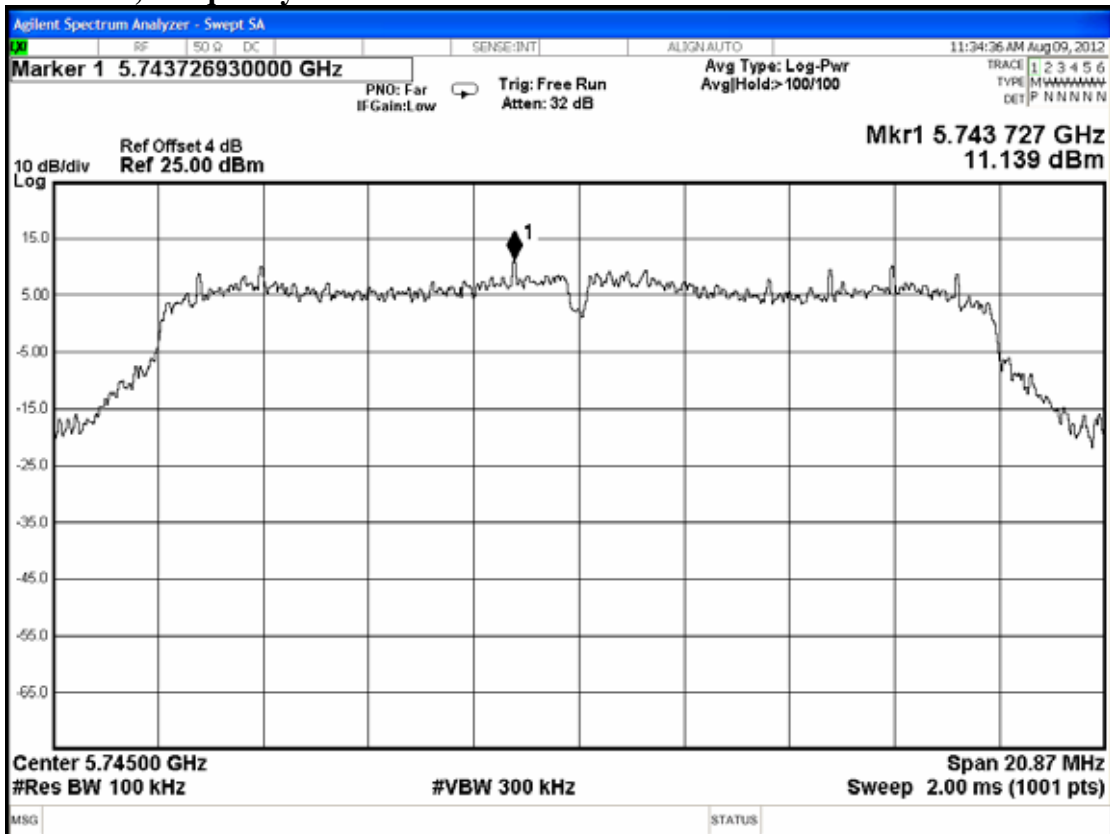


802.11g, Frequency: 5785MHz

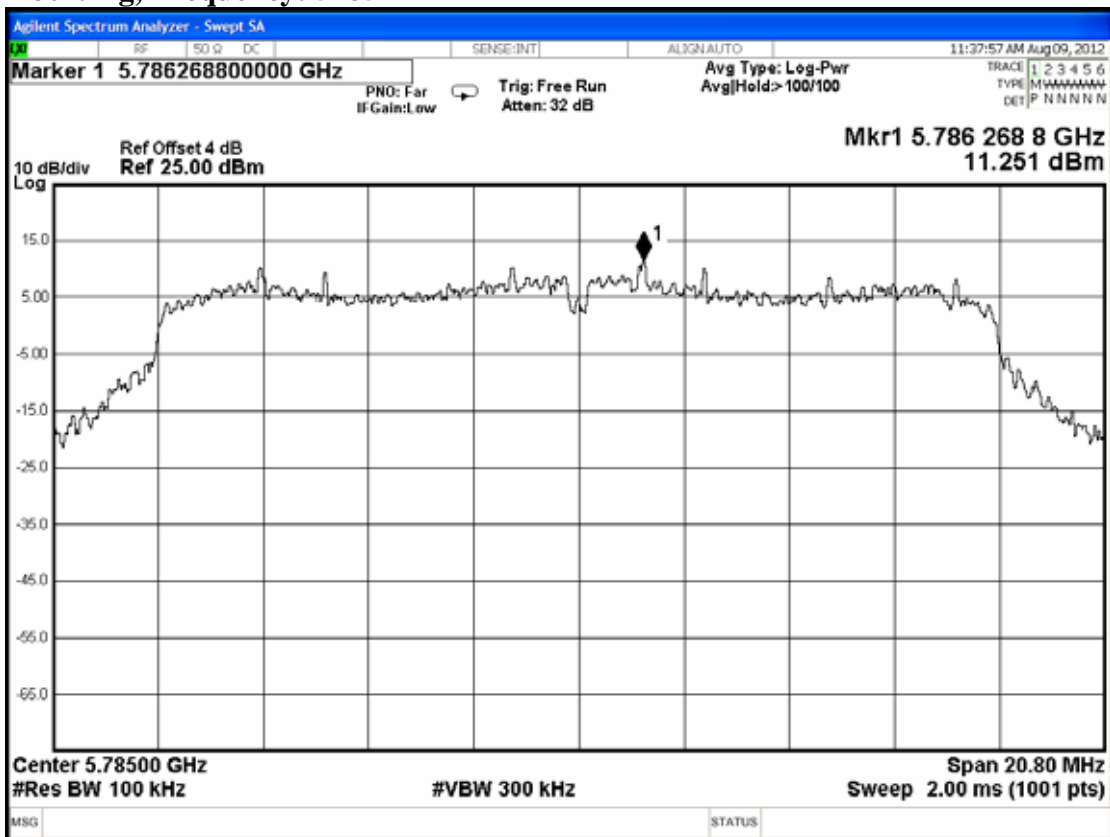


802.11g, Frequency: 5825MHz

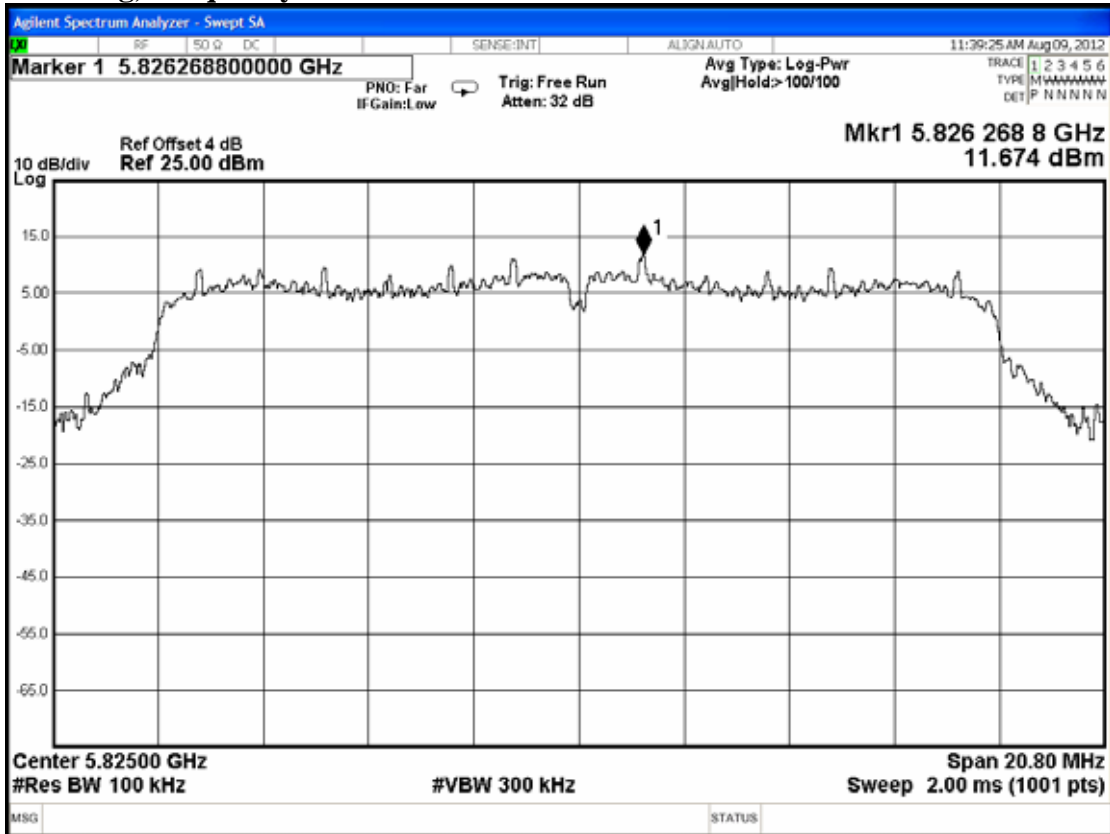


802.11n-HT20, Frequency: 2412MHz

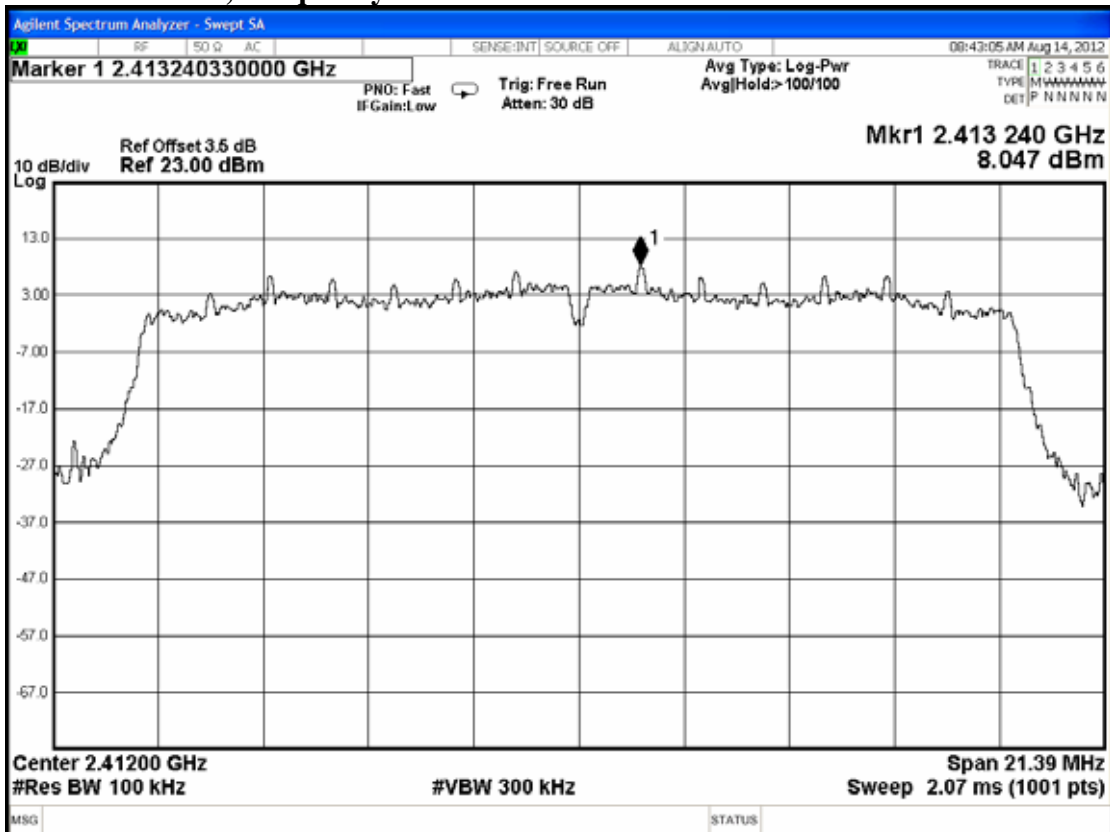


802.11n-HT20, Frequency: 2437MHz

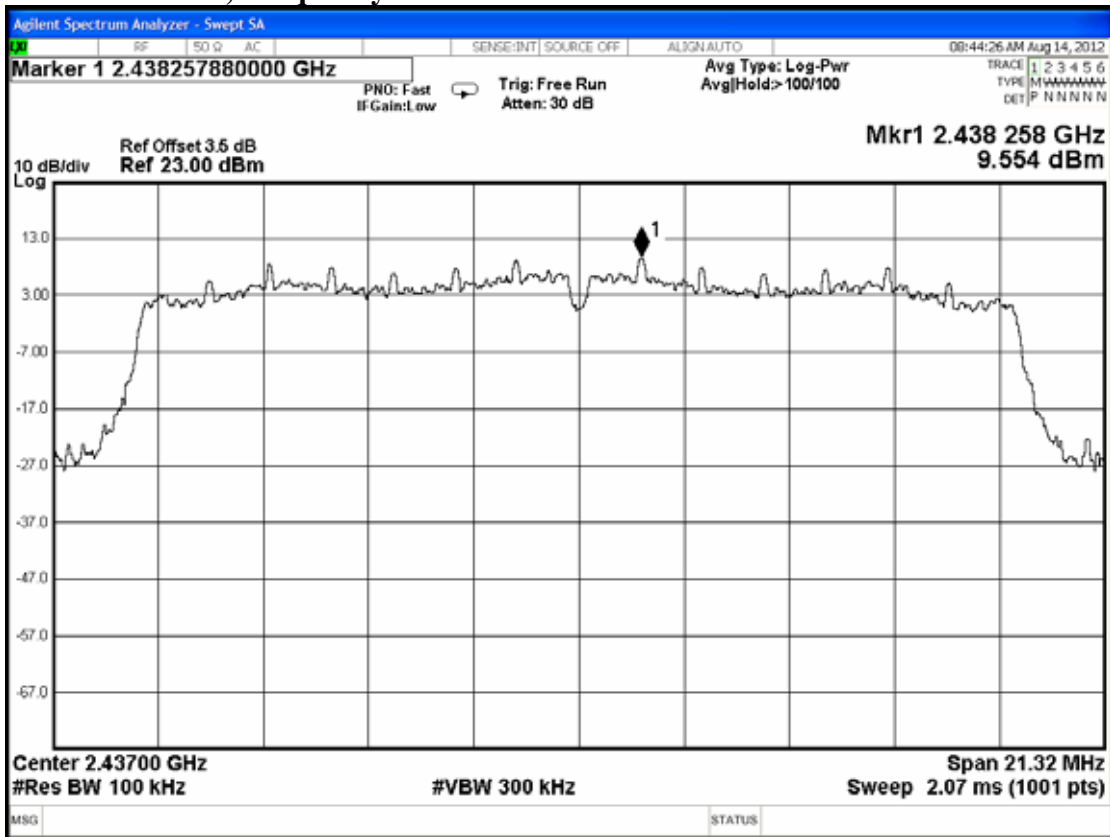


802.11n-HT20, Frequency: 2462MHz

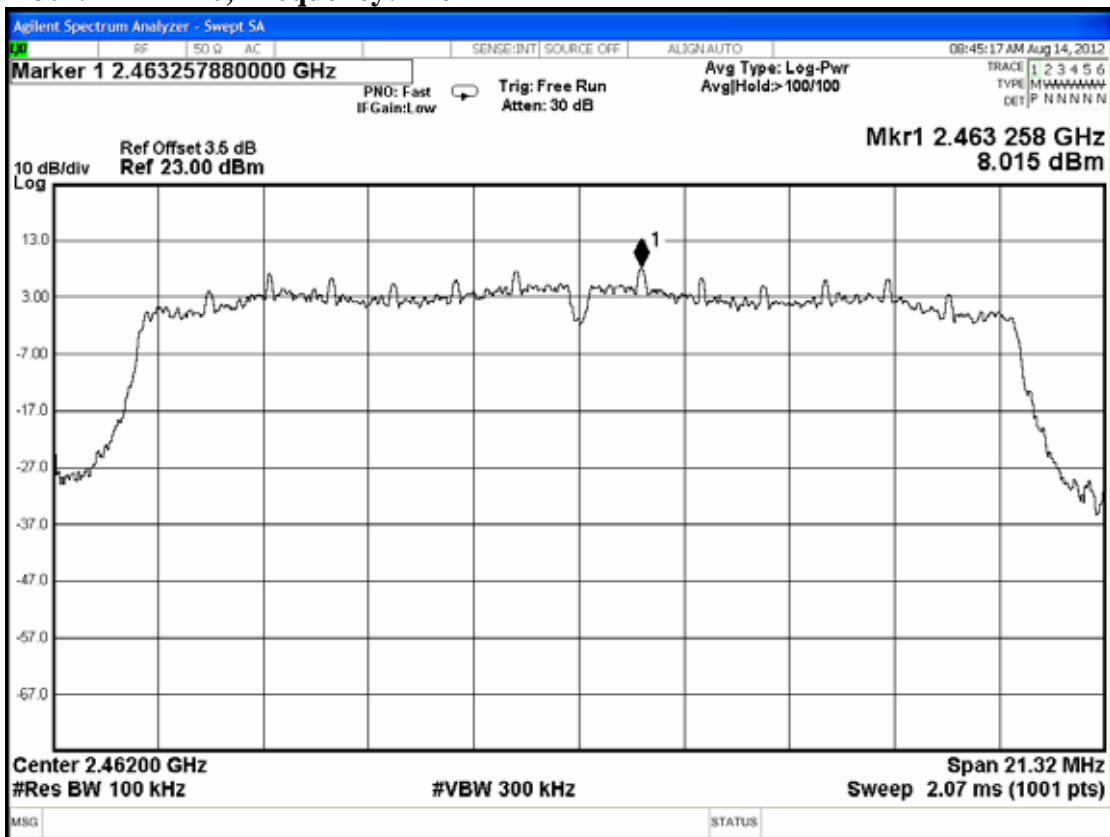


802.11n-HT20, Frequency: 5745MHz

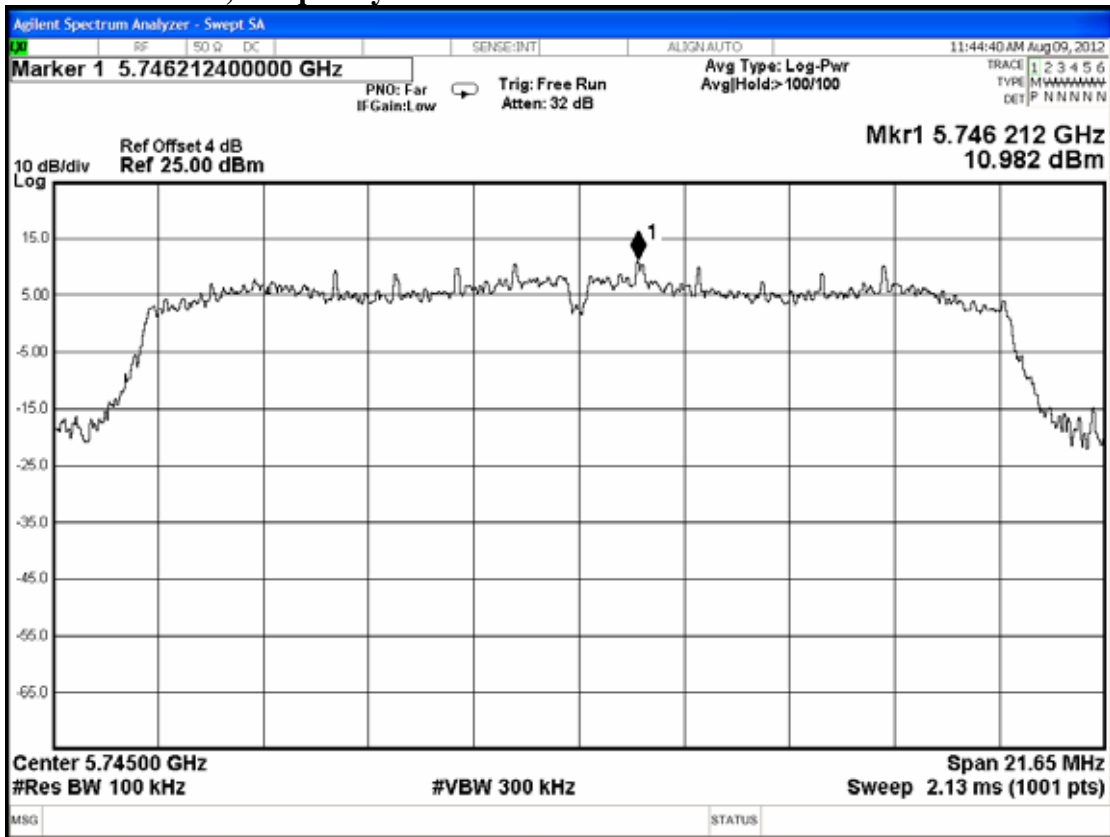


802.11n-HT20, Frequency: 5785MHz

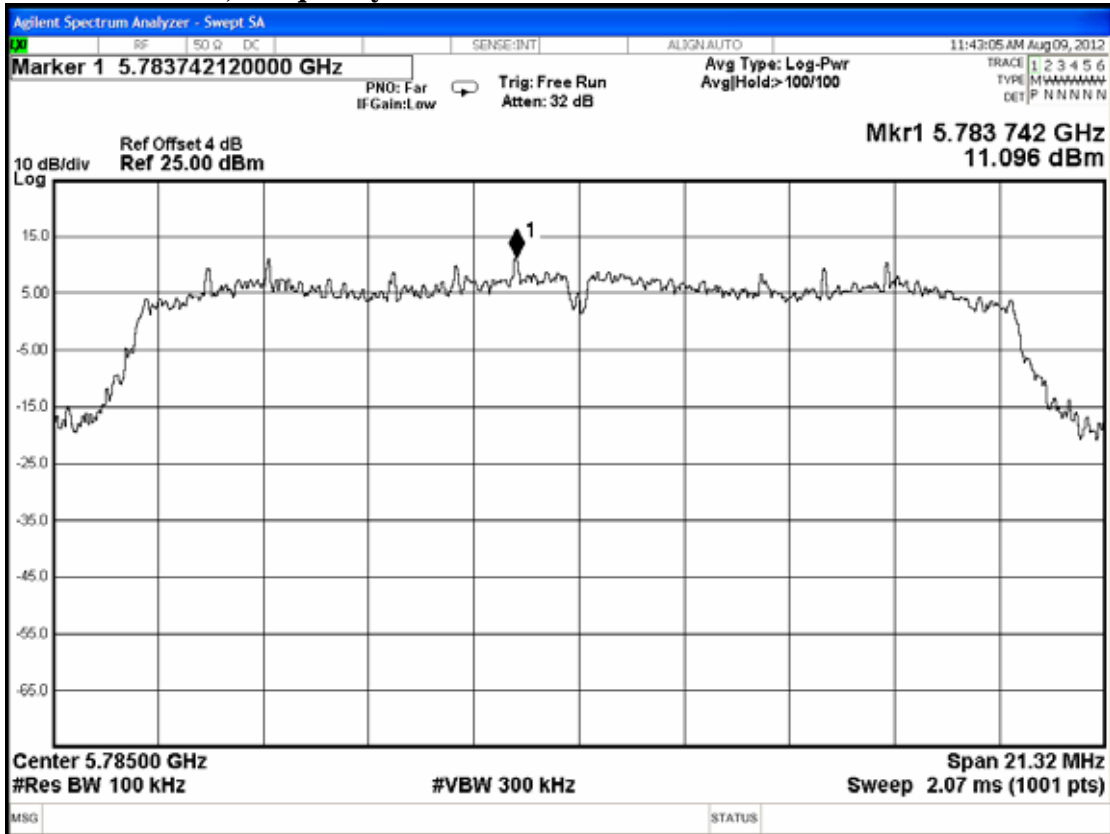


802.11n-HT20, Frequency: 5825MHz

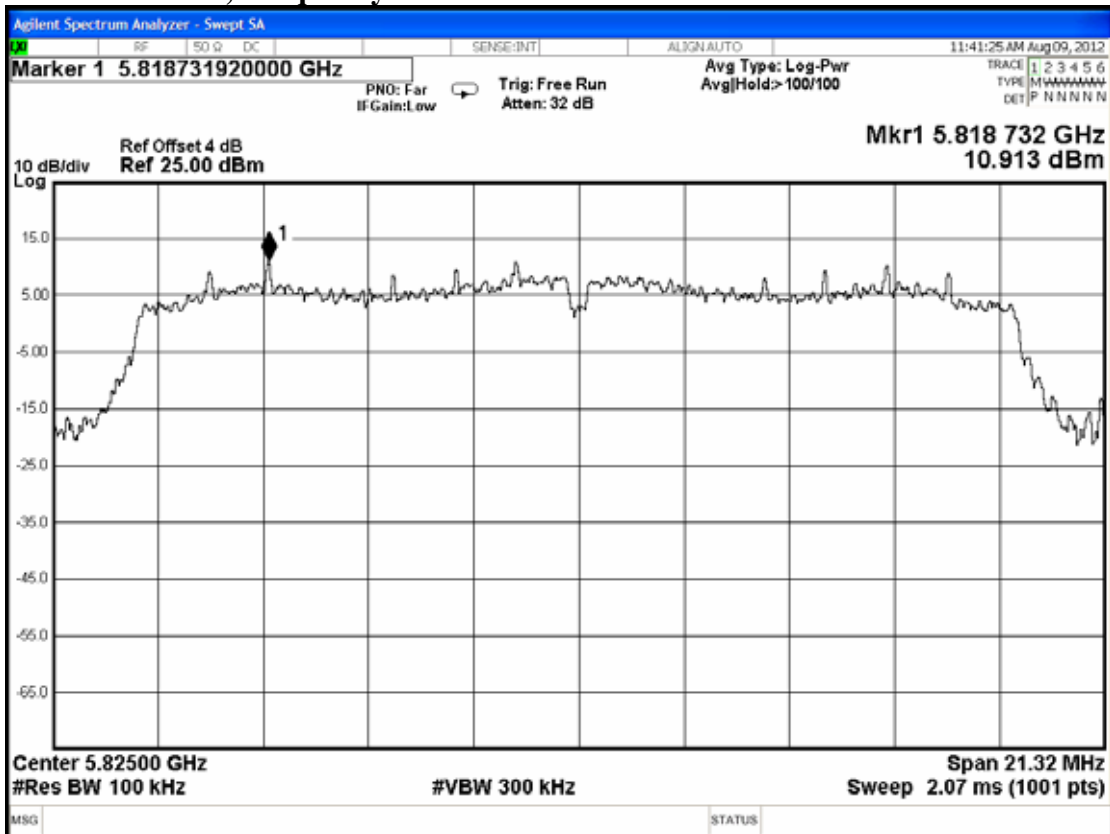


802.11n-HT40, Frequency: 2422MHz

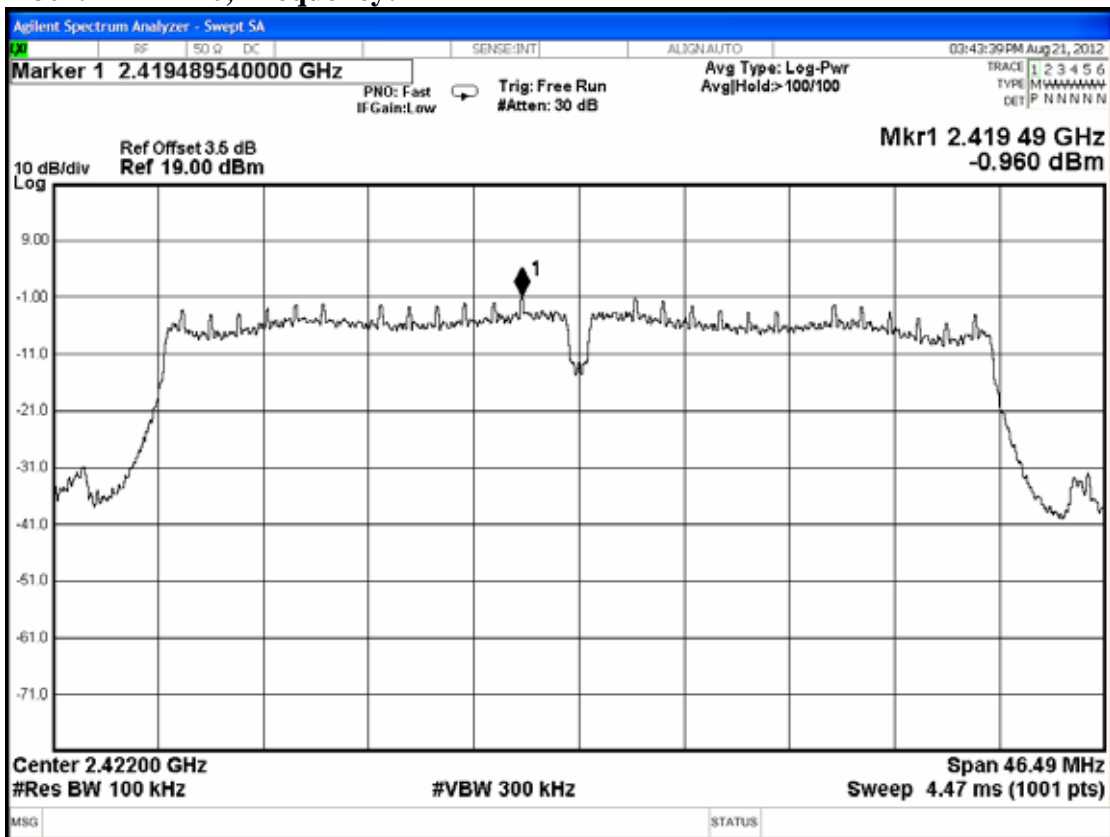


802.11n-HT40, Frequency: 2437MHz

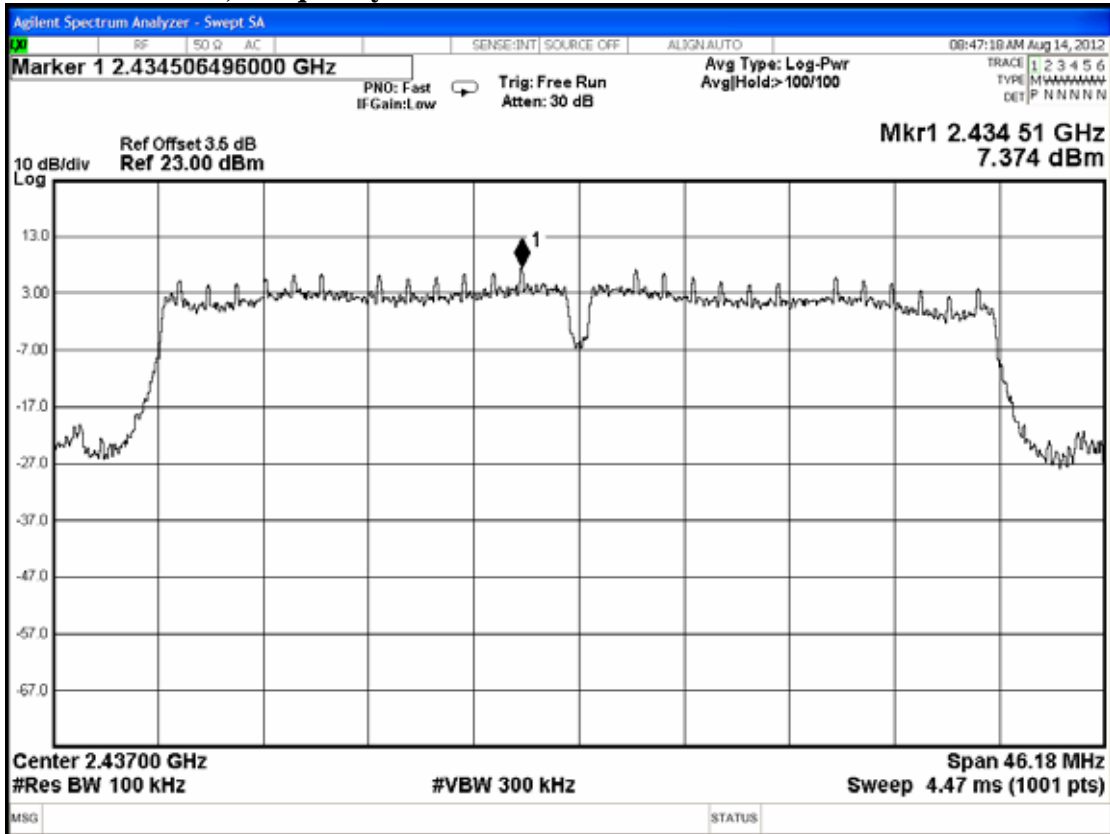


802.11n-HT40, Frequency: 2452MHz

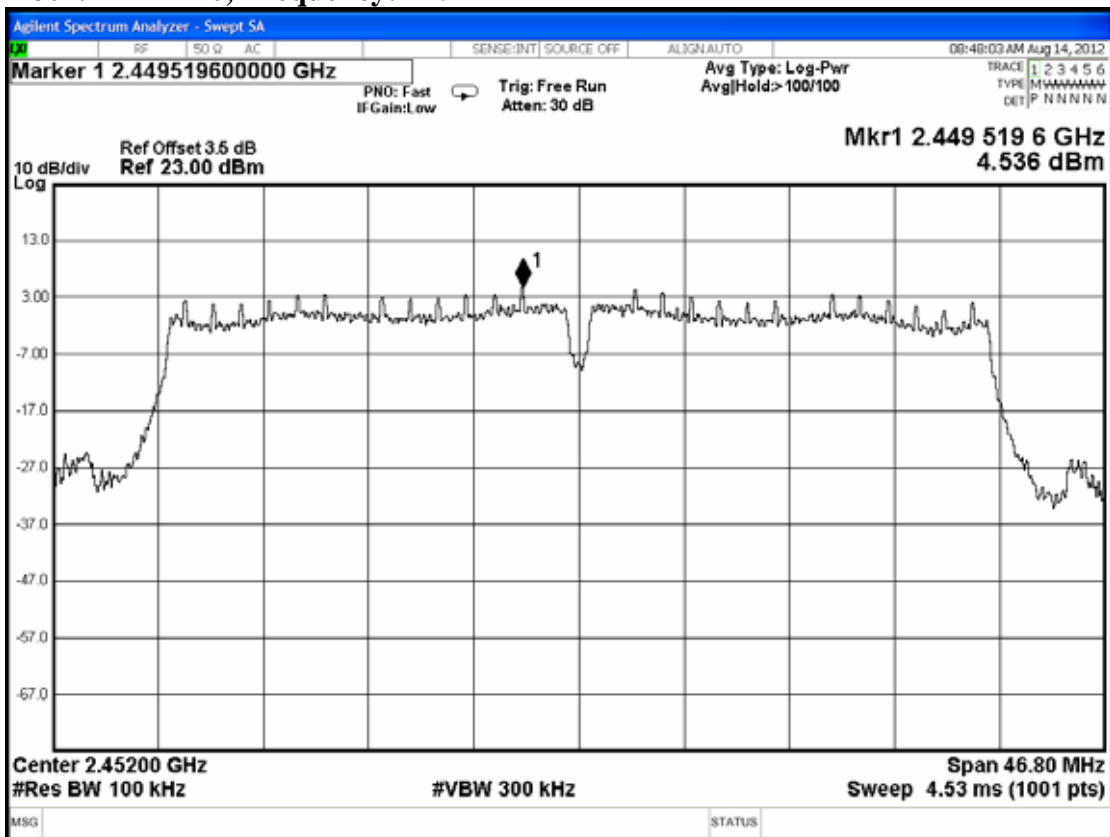

802.11n-HT40, Frequency: 5755MHz

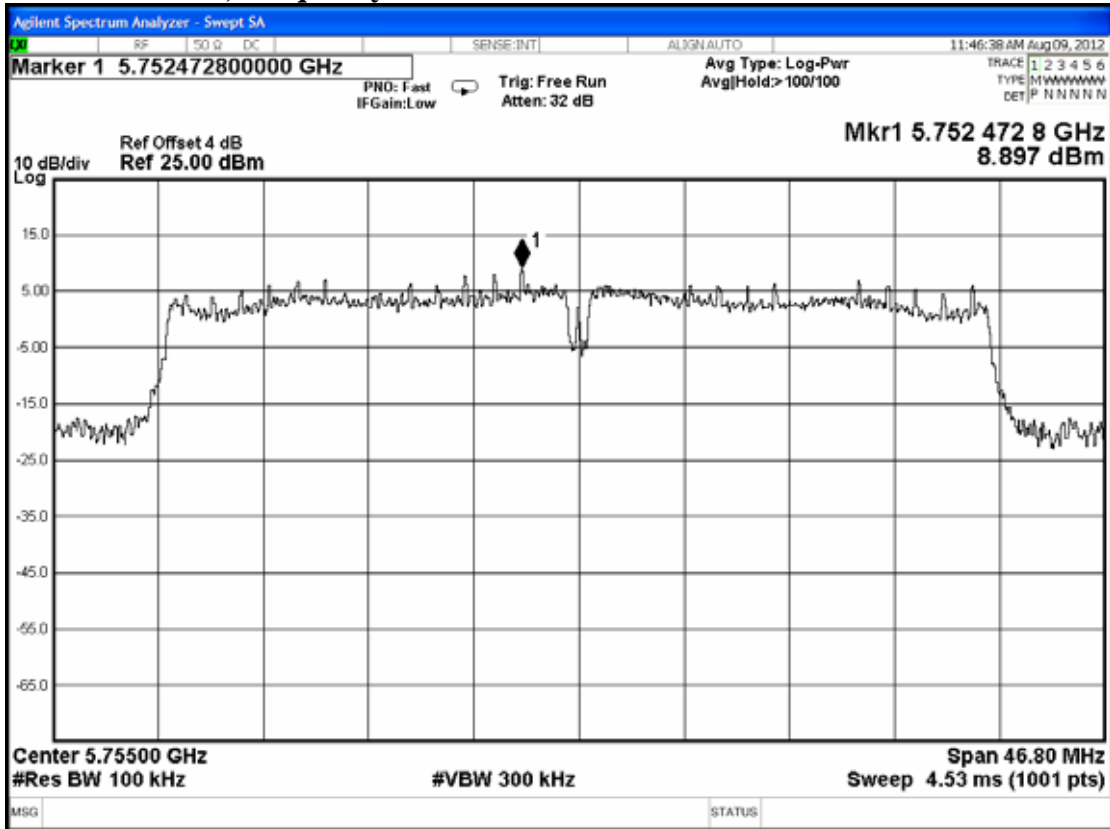

802.11n-HT40, Frequency: 5795MHz

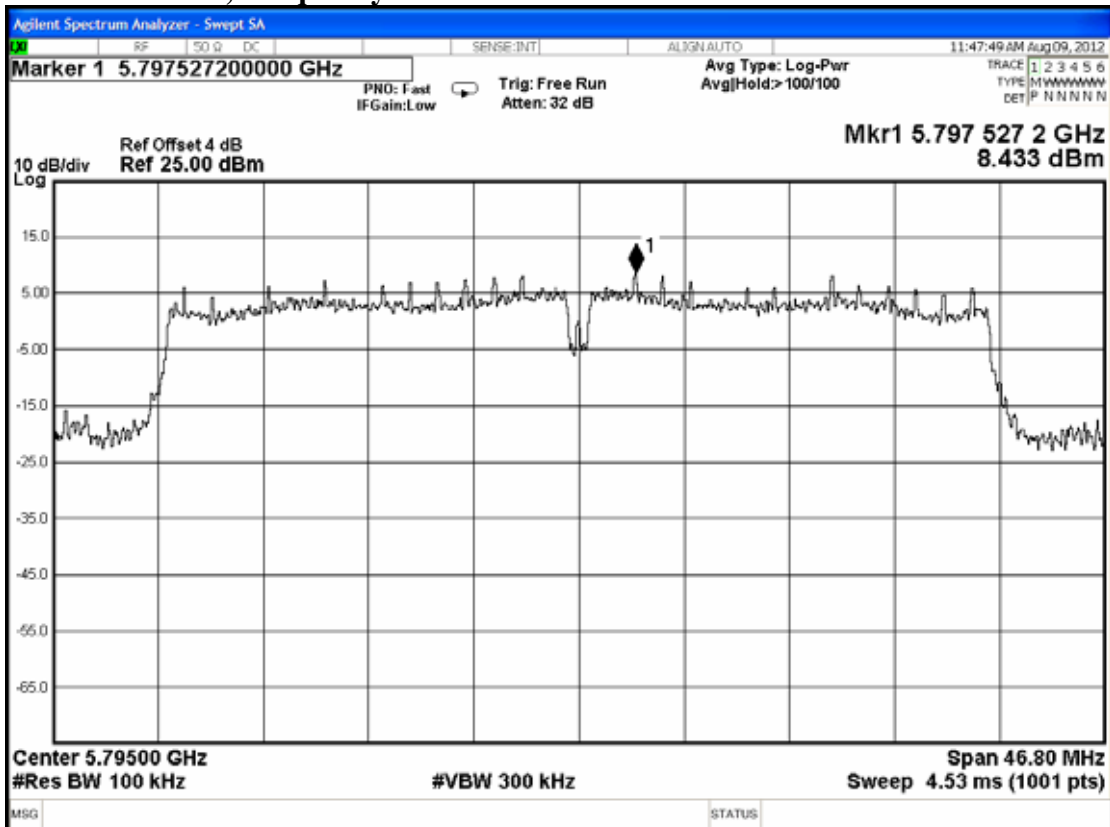

9. DEVIATION TO TEST SPECIFICATIONS

【NONE】