


Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 90° / Mode 2		


Horizontal

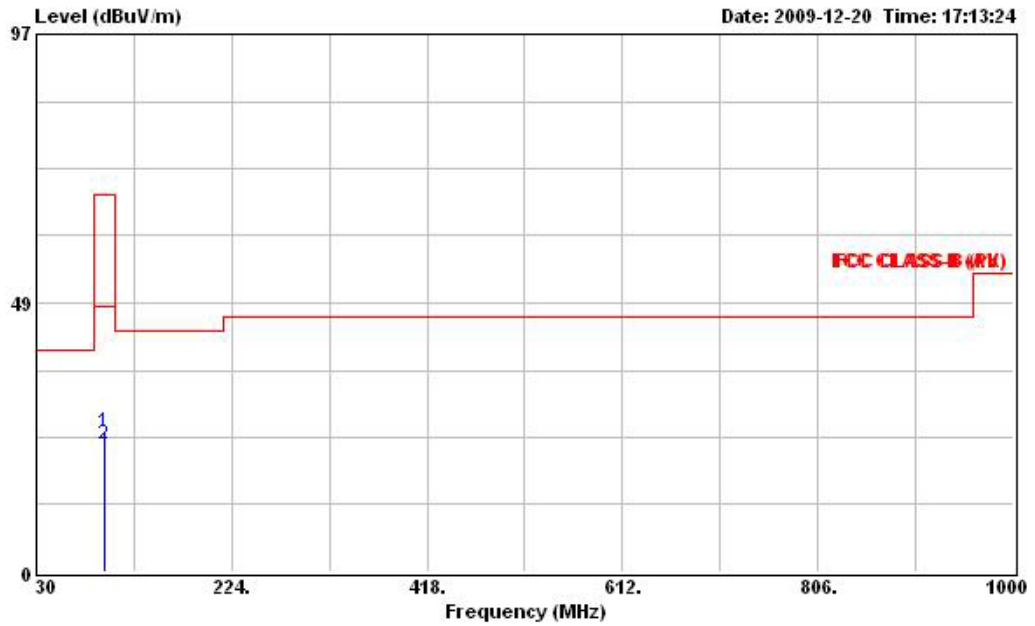

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	25.35	-42.65	68.00	40.24	2.26	10.96	28.11	Peak	304	---
2	96.880	22.86	-25.14	48.00	37.75	2.26	10.96	28.11	Average	304	---

Vertical

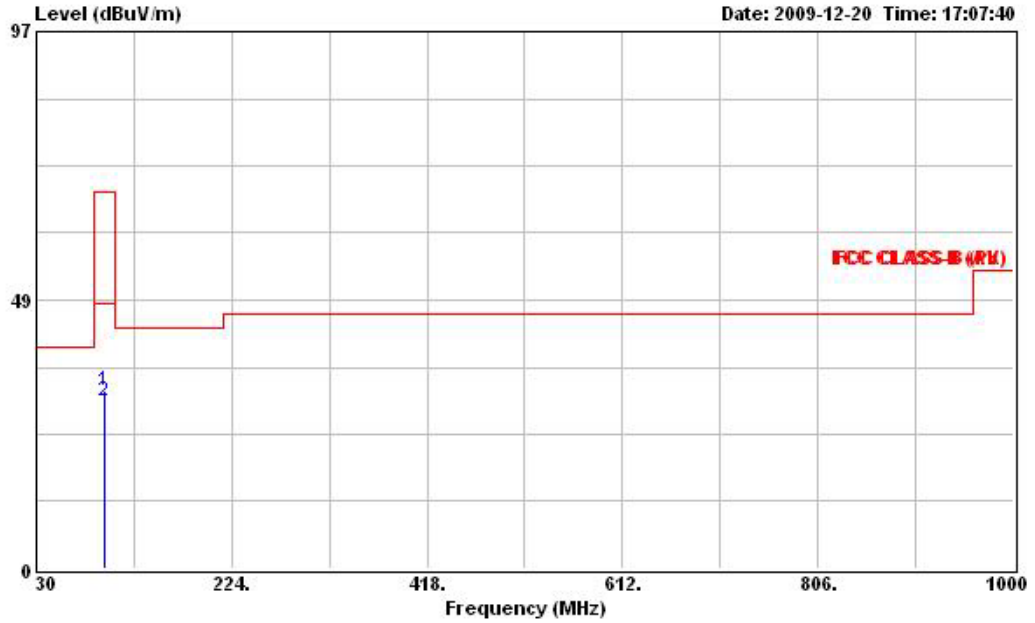


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	32.10	-35.90	68.00	46.99	2.26	10.96	28.11	Peak	100	---
2	96.880	30.35	-17.65	48.00	45.24	2.26	10.96	28.11	Average	100	---

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 135° / Mode 2		


Horizontal

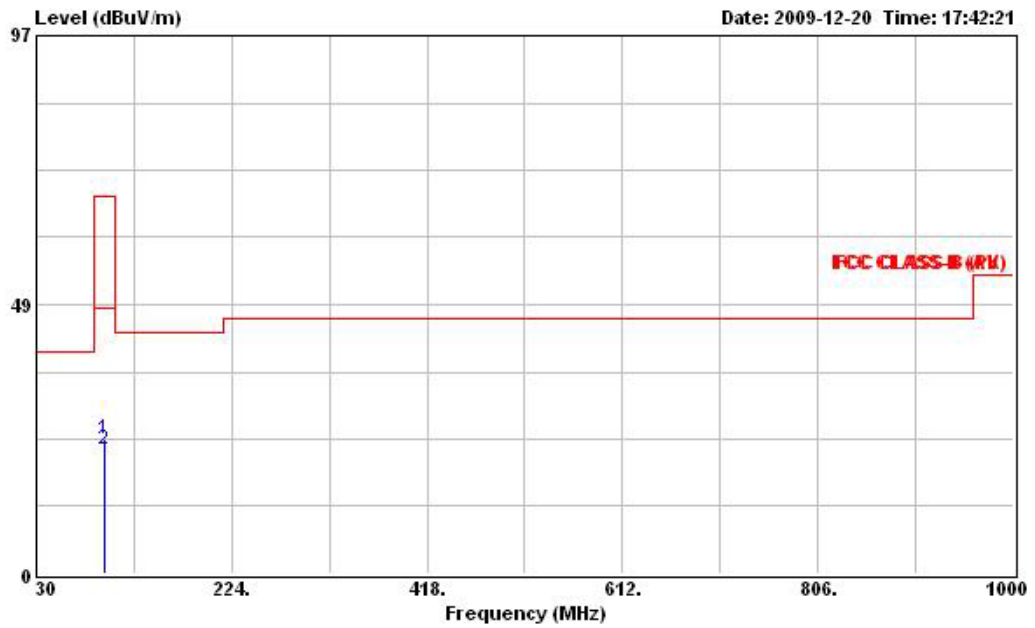

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	24.24	-43.76	68.00	39.13	2.26	10.96	28.11	Peak	281	135
2	96.880	22.33	-25.67	48.00	37.22	2.26	10.96	28.11	Average	281	135

Vertical

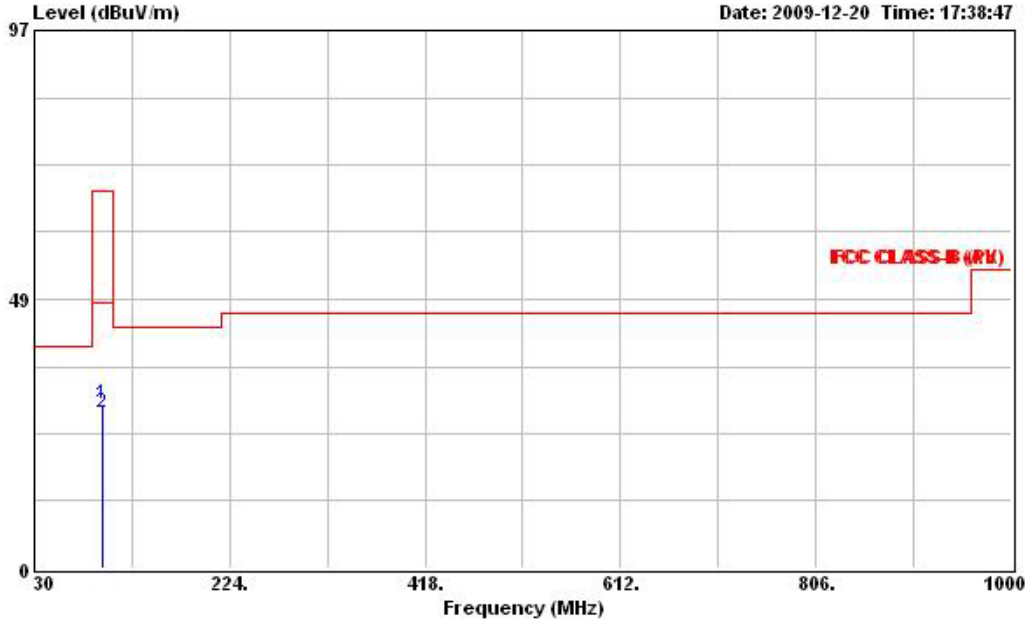


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	29.46	-38.54	68.00	44.35	2.26	10.96	28.11	Peak	105	135
2	96.880	27.98	-20.02	48.00	42.87	2.26	10.96	28.11	Average	105	135

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 180° / Mode 2		


Horizontal

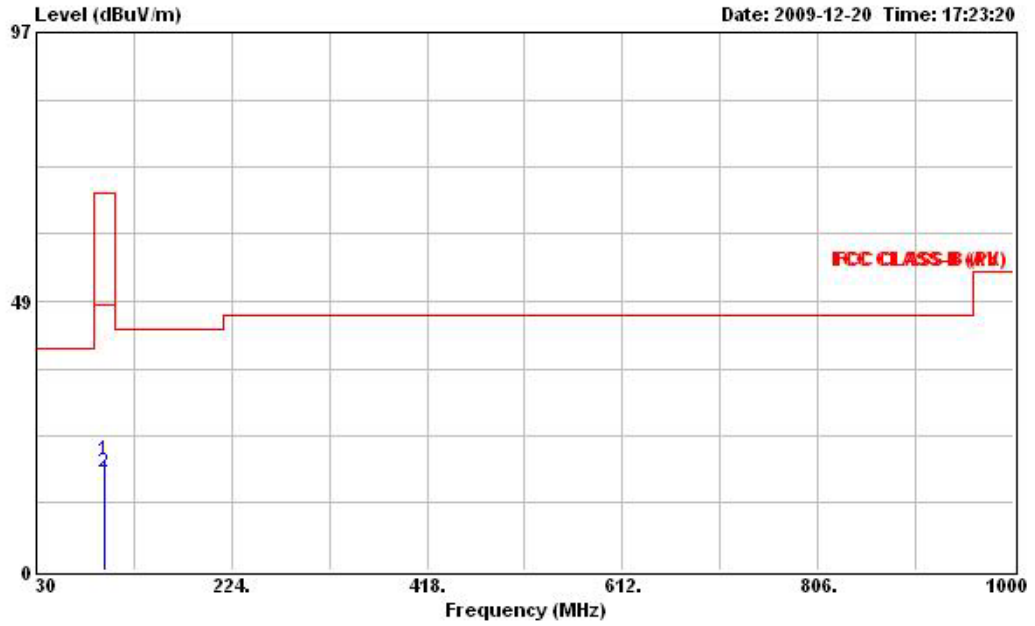

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	19.80	-48.20	68.00	34.69	2.26	10.96	28.11	Peak	318	90
2	96.880	17.56	-30.44	48.00	32.45	2.26	10.96	28.11	Average	318	90

Vertical

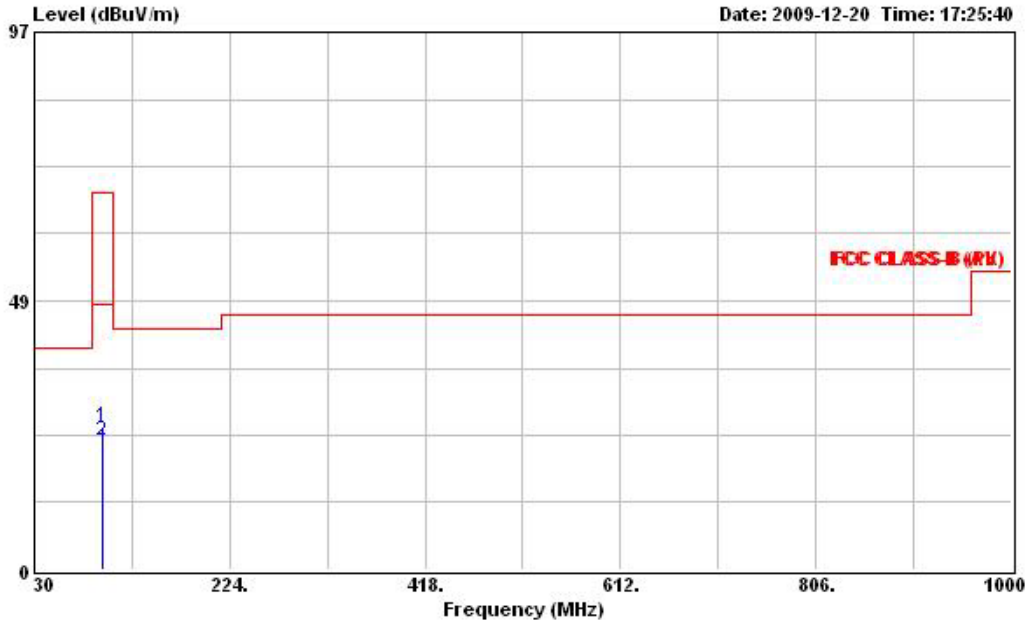


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	25.80	-42.20	68.00	40.69	2.26	10.96	28.11	Peak	151	90
2	96.880	23.43	-24.57	48.00	38.32	2.26	10.96	28.11	Average	151	90

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 225° / Mode 2		


Horizontal

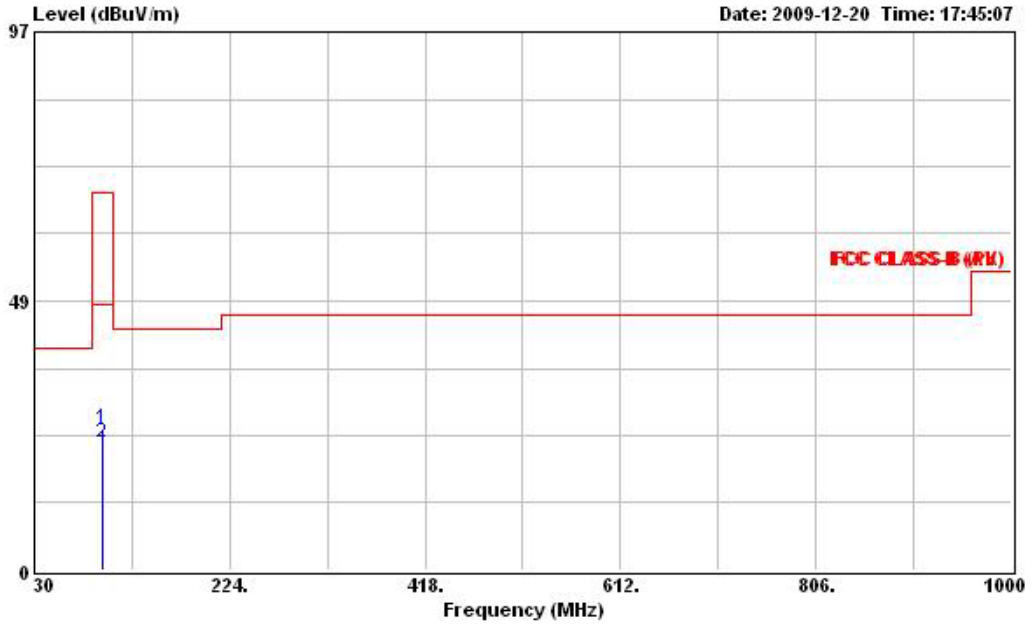

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	25.52	-42.48	68.00	40.41	2.26	10.96	28.11	Peak	286	45
2	96.880	22.93	-25.07	48.00	37.82	2.26	10.96	28.11	Average	286	45

Vertical

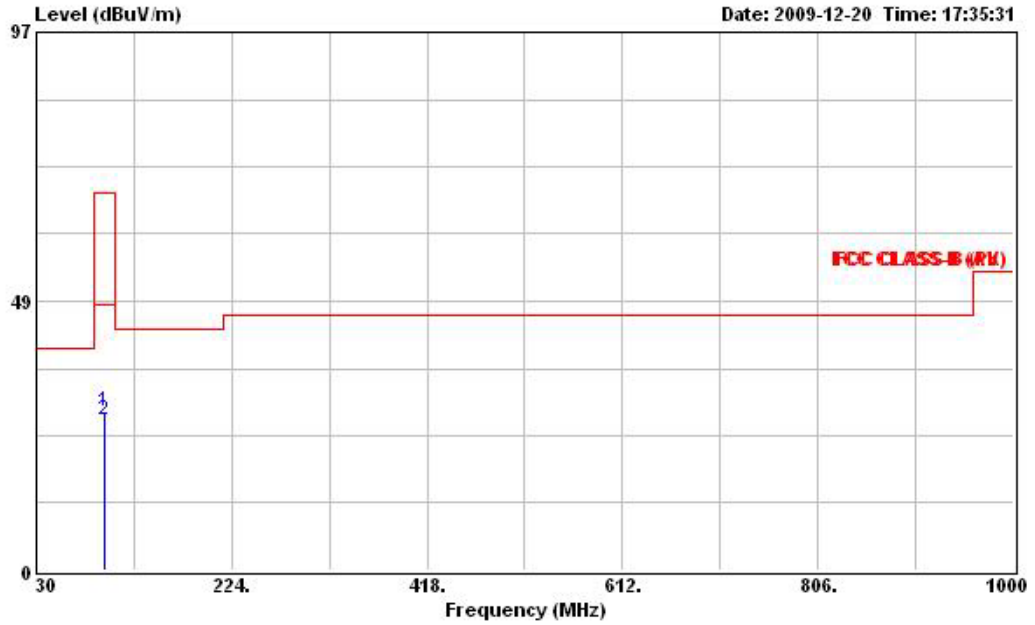


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	28.76	-39.24	68.00	43.65	2.26	10.96	28.11	Peak	104	45
2	96.880	27.13	-20.87	48.00	42.02	2.26	10.96	28.11	Average	104	45



Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 270° / Mode 2		


Horizontal

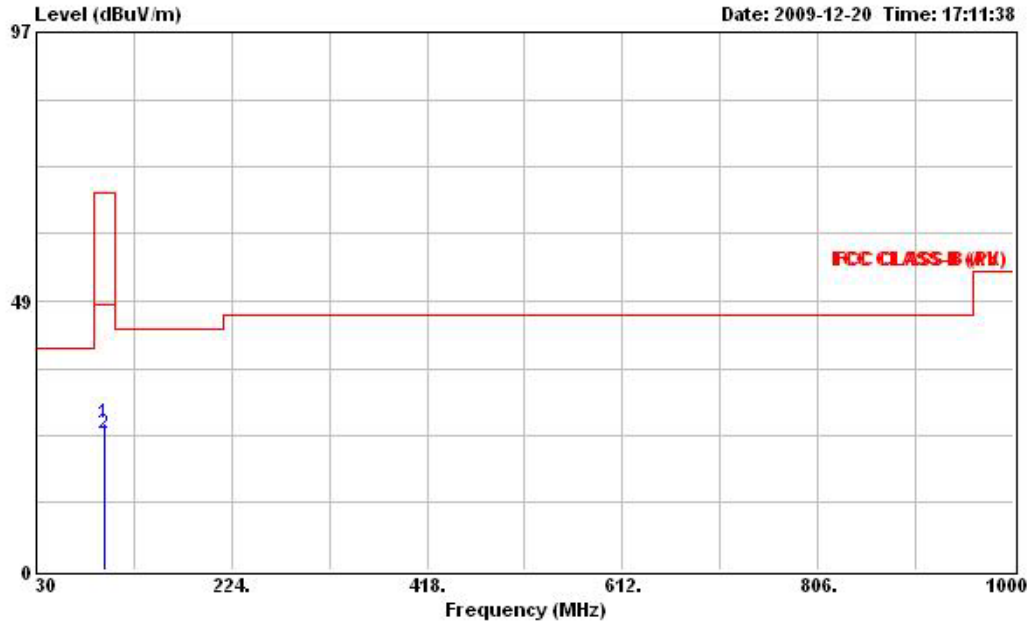

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	26.46	-41.54	68.00	41.35	2.26	10.96	28.11	Peak	333	0
2	96.880	24.57	-23.43	48.00	39.46	2.26	10.96	28.11	Average	333	0

Vertical

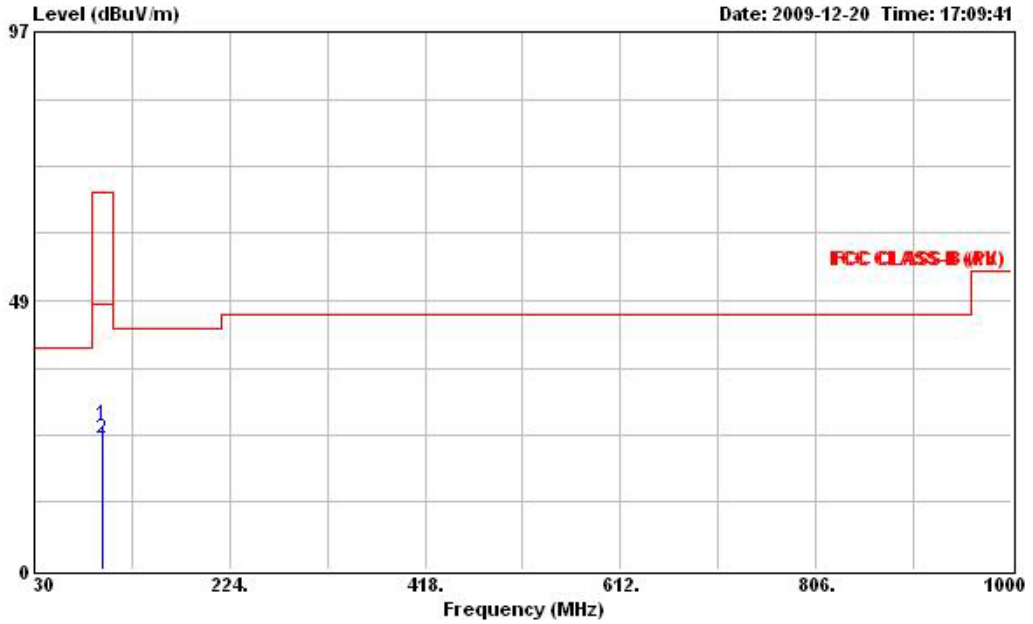


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	26.24	-41.76	68.00	41.13	2.26	10.96	28.11	Peak	103	0
2	96.880	23.57	-24.43	48.00	38.46	2.26	10.96	28.11	Average	103	0

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 315° / Mode 2		


Horizontal

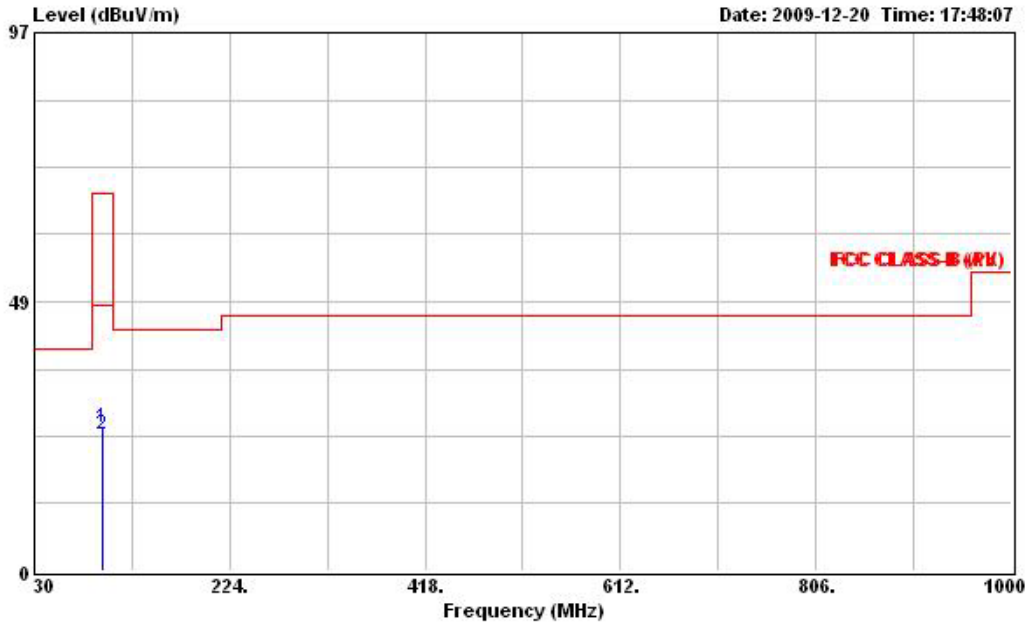

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMP05  
 Memo : FCC ID:BGA-XMP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	25.98	-42.02	68.00	40.87	2.26	10.96	28.11	Peak	362	45
2	96.880	24.58	-23.42	48.00	39.47	2.26	10.96	28.11	Average	362	45

Vertical

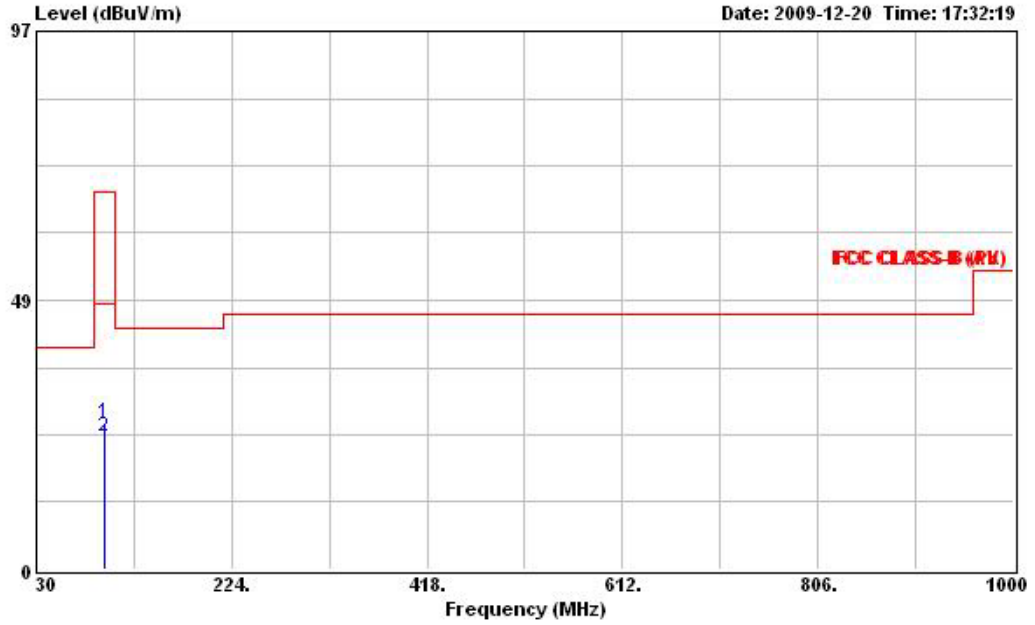


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : Mitsubishi ( LANCER GLXi )  
 Memo : Small CAR  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	26.31	-41.69	68.00	41.20	2.26	10.96	28.11	Peak	100	---
2	96.880	23.88	-24.12	48.00	38.77	2.26	10.96	28.11	Average	100	---

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 0° / Mode 3		


Horizontal

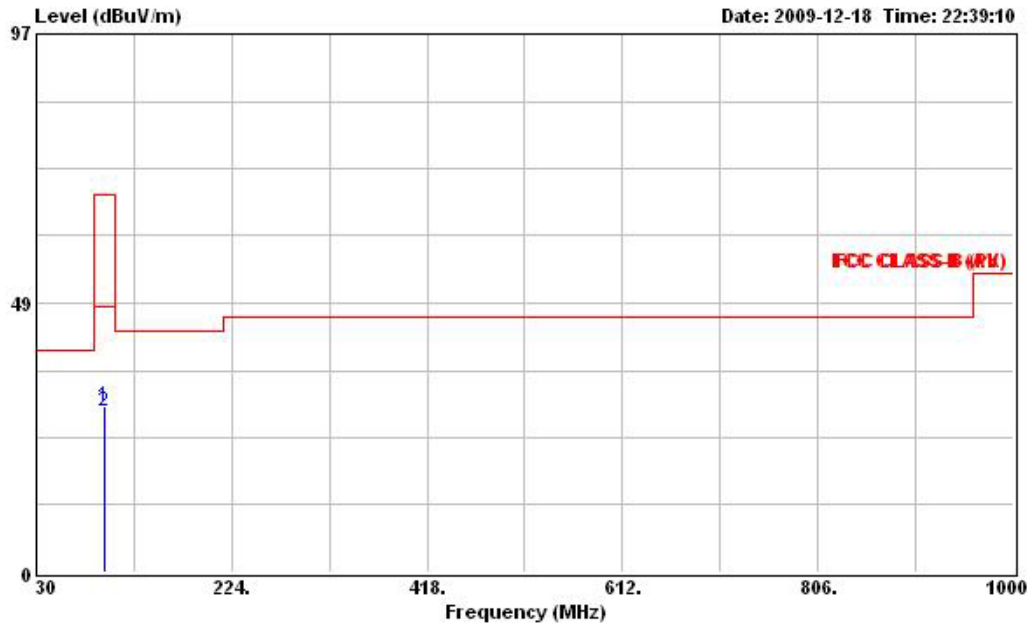

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	29.91	-38.09	68.00	44.80	2.26	10.96	28.11	Peak	400	---
2	96.890	28.92	-19.08	48.00	43.81	2.26	10.96	28.11	Average	400	---

Vertical

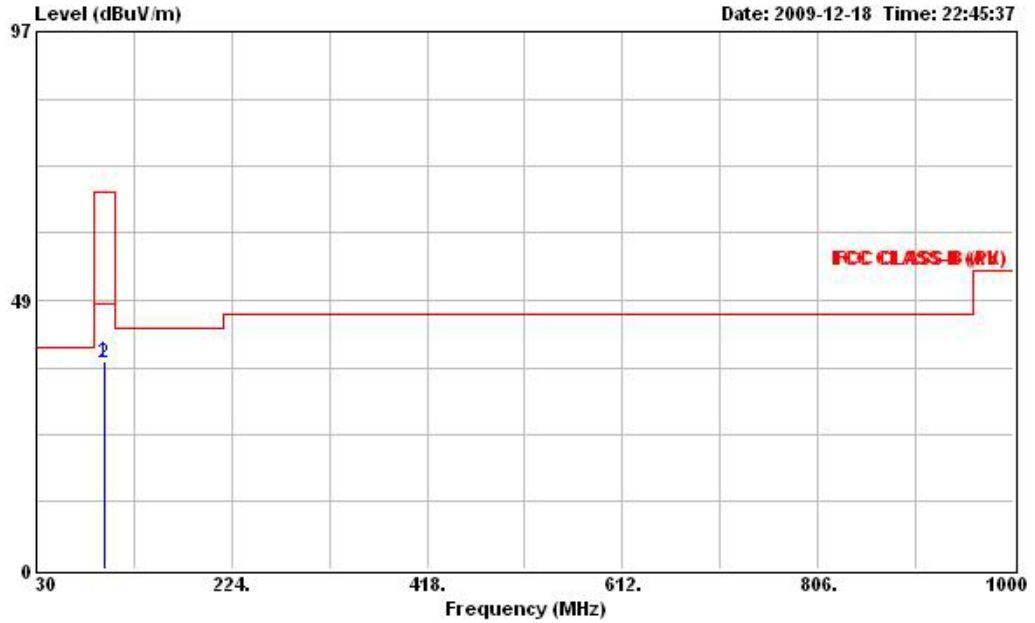


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	37.57	-30.43	68.00	52.46	2.26	10.96	28.11	Peak	125	---
2	96.890	37.13	-10.87	48.00	52.02	2.26	10.96	28.11	Average	125	---

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 45° / Mode 3		


Horizontal

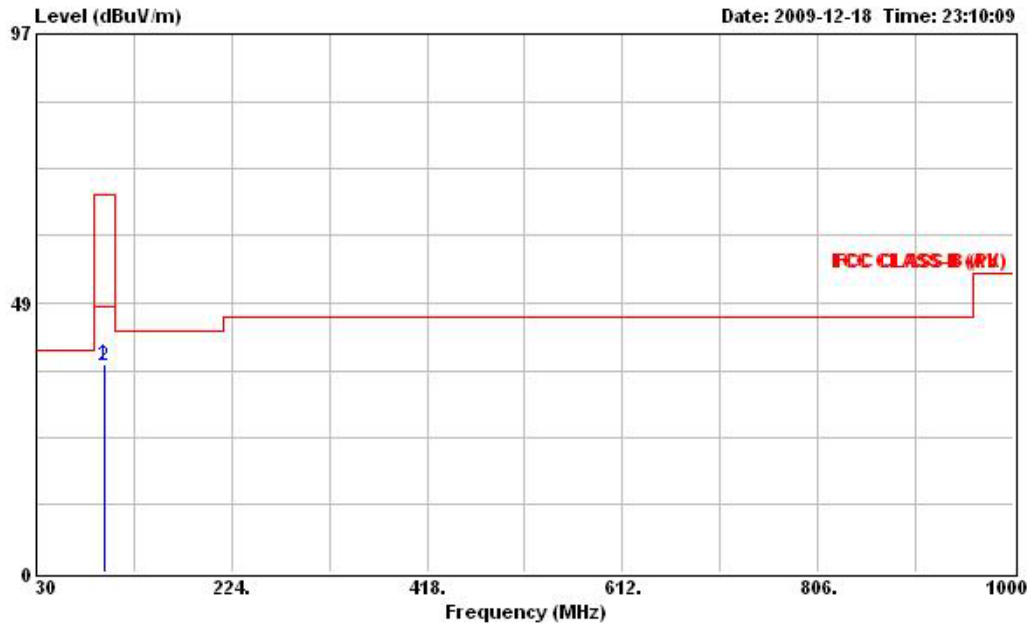

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	37.62	-30.38	48.00	52.51	2.26	10.96	28.11	Peak	304	---
2	96.890	37.18	-10.82	48.00	52.07	2.26	10.96	28.11	Average	304	---

Vertical

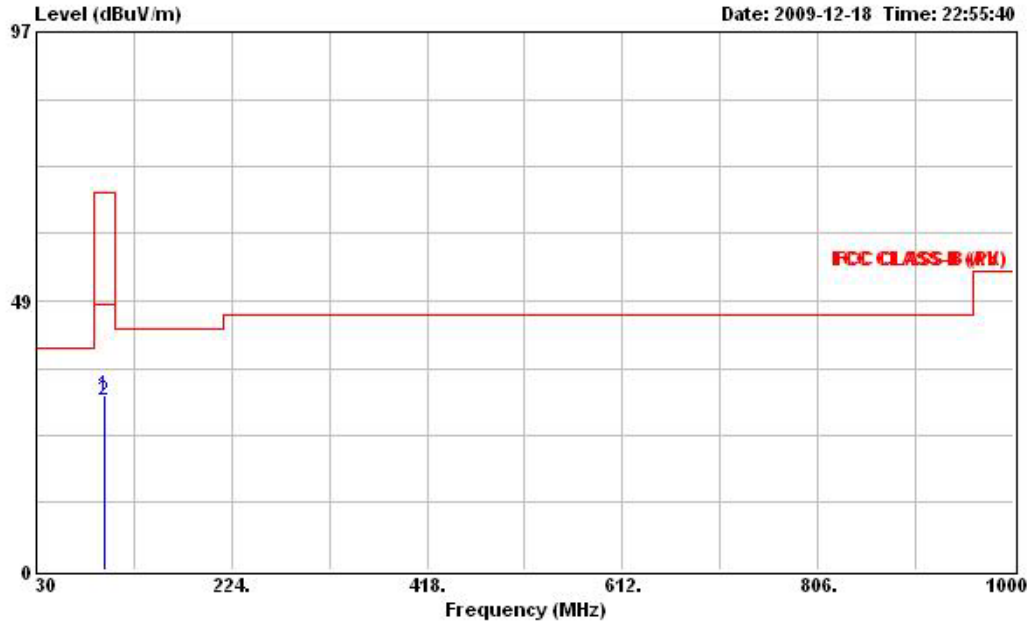


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	31.46	-36.54	68.00	46.35	2.26	10.96	28.11	Peak	159	---
2	96.890	30.46	-17.54	48.00	45.35	2.26	10.96	28.11	Average	159	---



Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 90° / Mode 3		


Horizontal

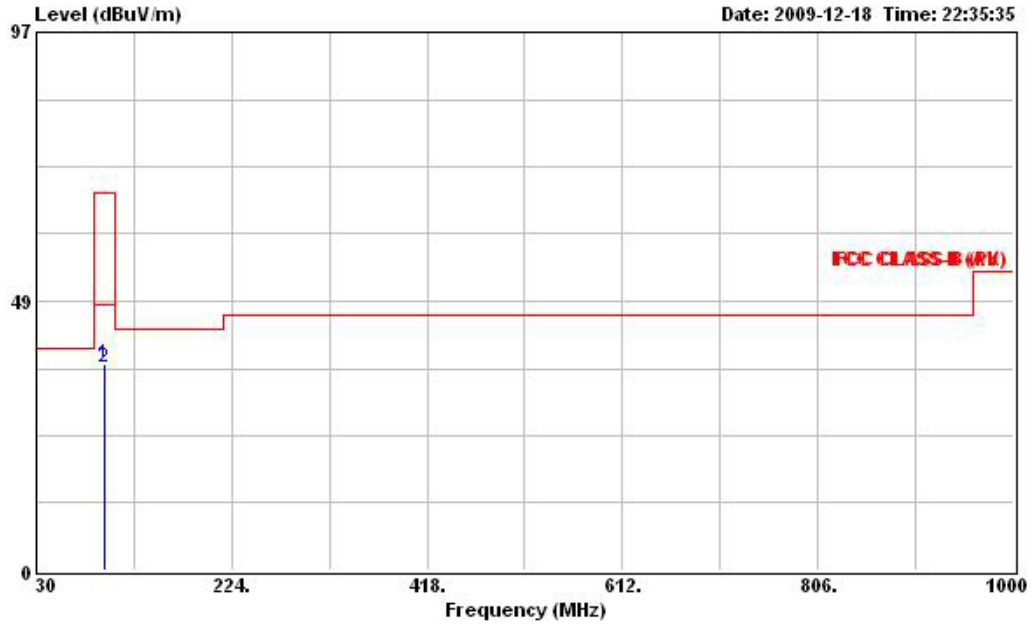

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	37.21	-30.79	68.00	52.10	2.26	10.96	28.11	Peak	303	---
2	96.890	36.68	-11.32	48.00	51.57	2.26	10.96	28.11	Average	303	---

Vertical

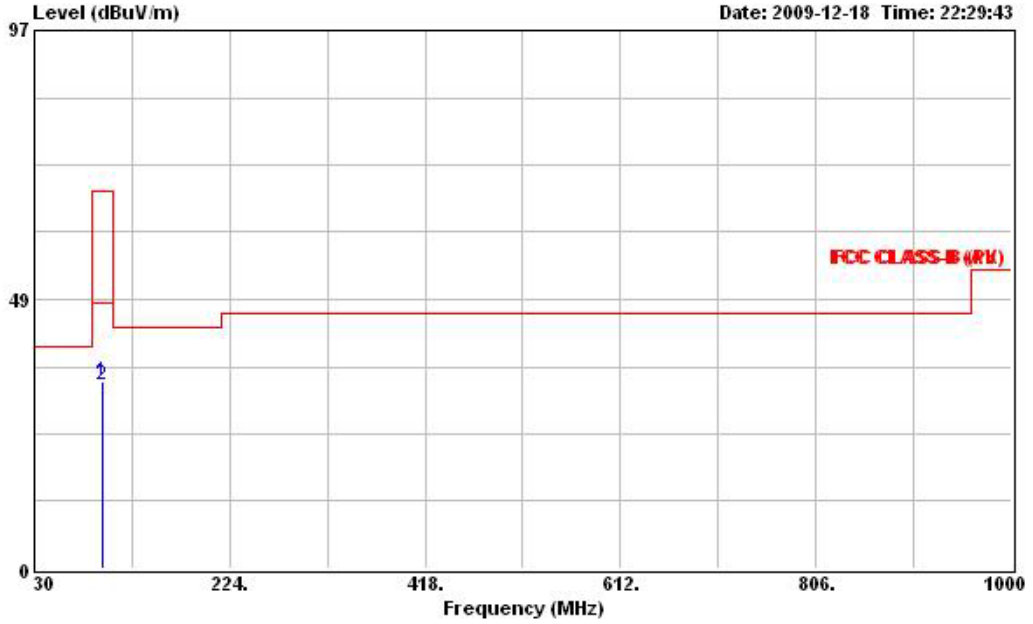


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	33.81	-34.19	68.00	48.70	2.26	10.96	28.11	Peak	100	---
2	96.890	33.14	-14.86	48.00	48.03	2.26	10.96	28.11	Average	100	---

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 135° / Mode 3		


Horizontal

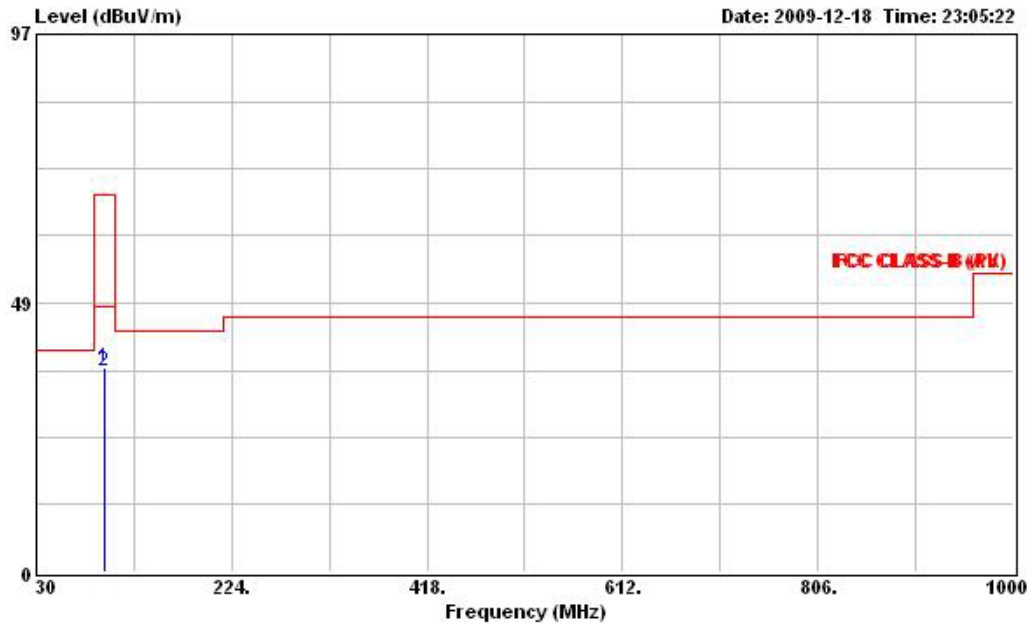

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	36.82	-31.18	68.00	51.71	2.26	10.96	28.11	Peak	332	135
2	96.890	36.35	-11.65	48.00	51.24	2.26	10.96	28.11	Average	332	135

Vertical

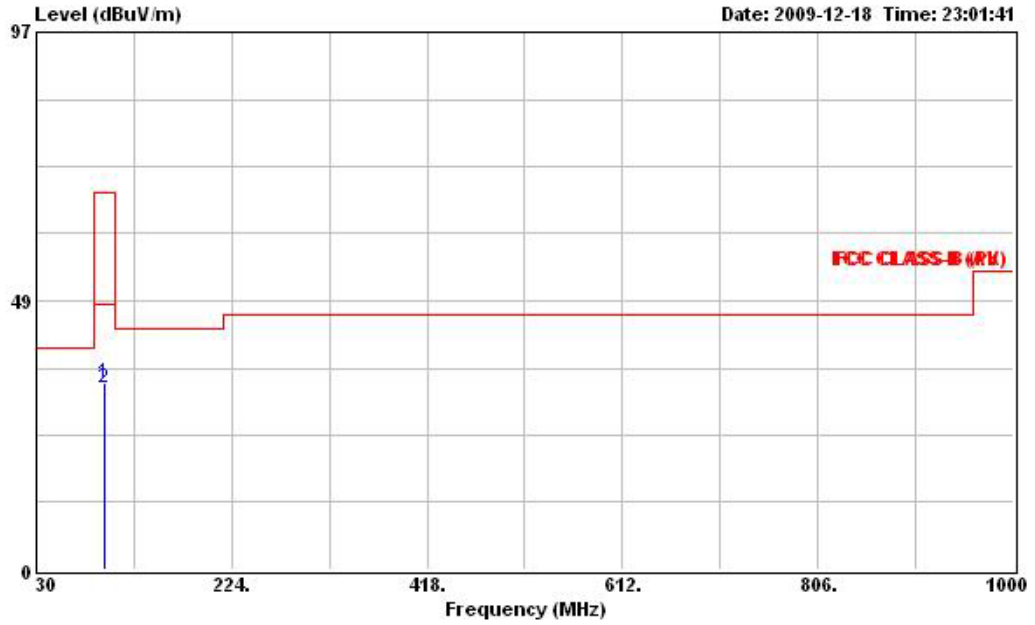


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	33.82	-34.18	68.00	48.71	2.26	10.96	28.11	Peak	101	135
2	96.890	32.87	-15.13	48.00	47.76	2.26	10.96	28.11	Average	101	135

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 180° / Mode 3		


Horizontal

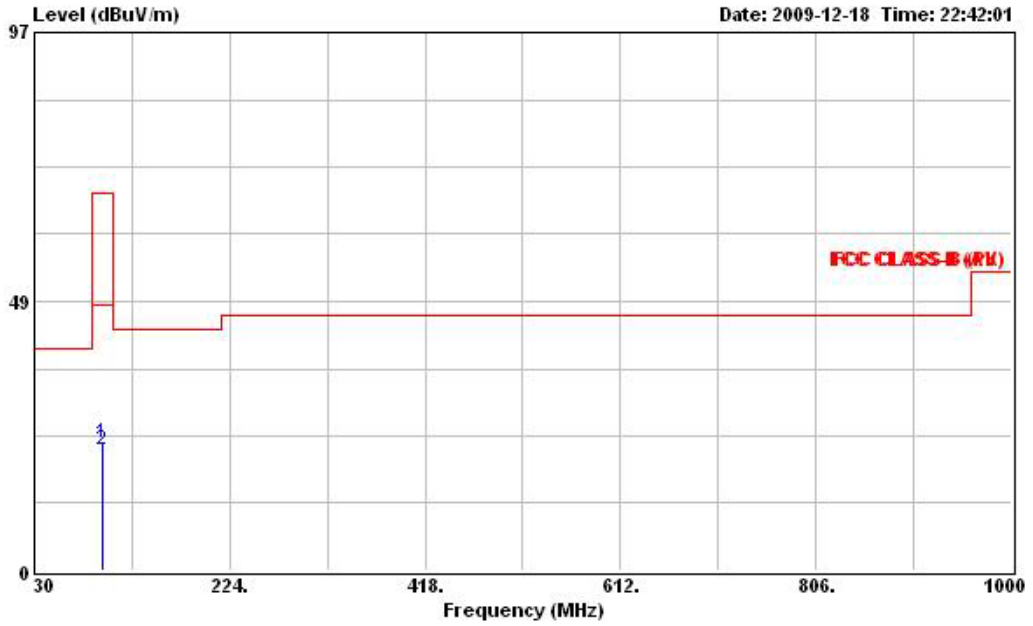

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	23.15	-44.85	68.00	38.04	2.26	10.96	28.11	Peak	125	90
2	96.890	21.80	-26.20	48.00	36.69	2.26	10.96	28.11	Average	125	90

Vertical

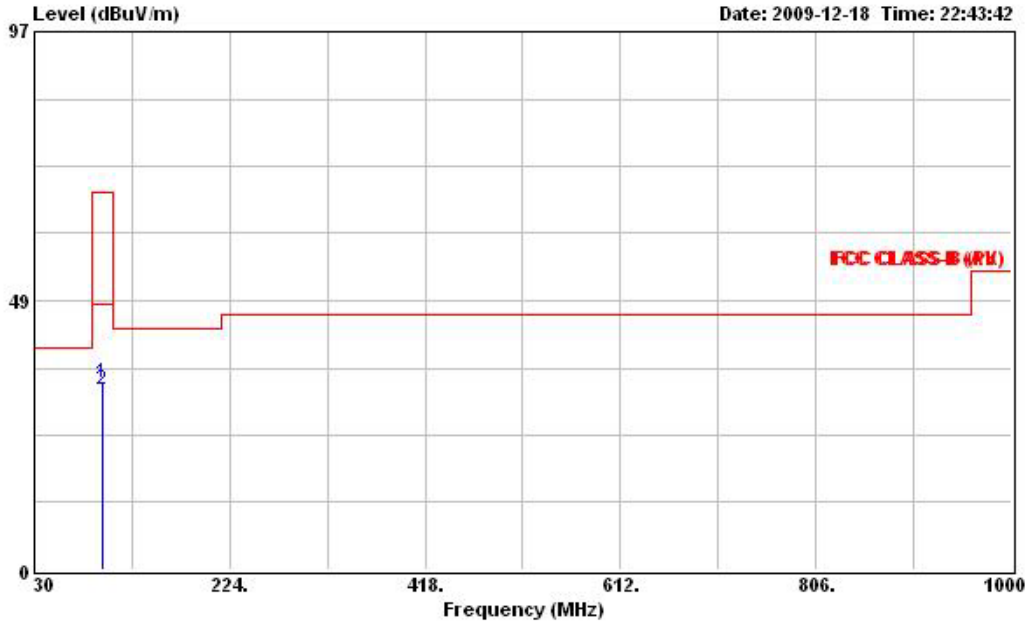


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	33.66	-34.34	68.00	48.55	2.26	10.96	28.11	Peak	113	90
2	96.890	32.59	-15.41	48.00	47.48	2.26	10.96	28.11	Average	113	90

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 225° / Mode 3		


Horizontal

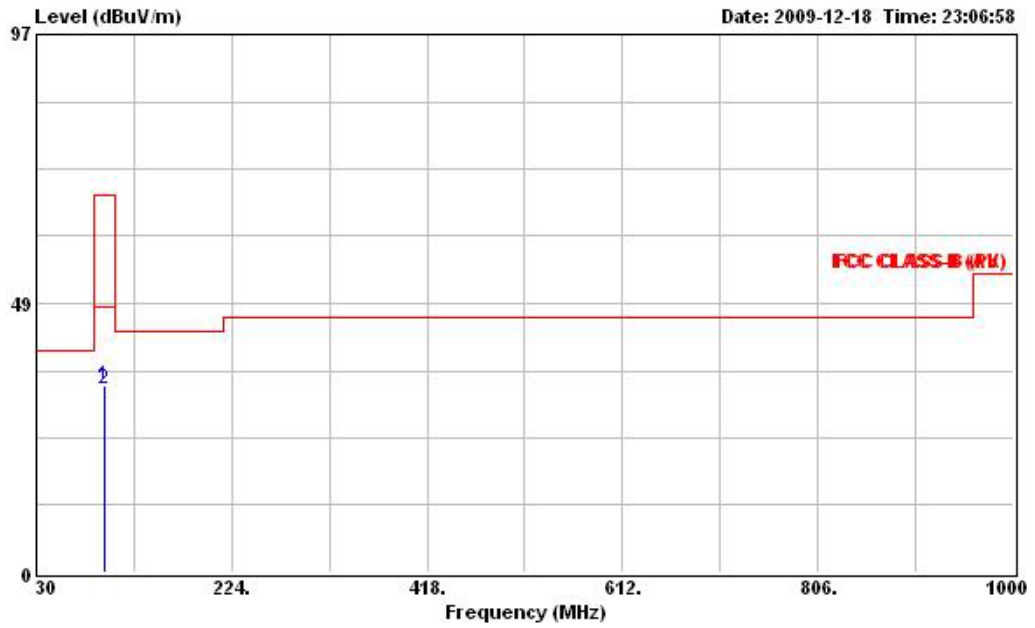

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	33.72	-34.28	68.00	48.61	2.26	10.96	28.11	Peak	348	45
2	96.890	32.99	-15.01	48.00	47.88	2.26	10.96	28.11	Average	348	45

Vertical

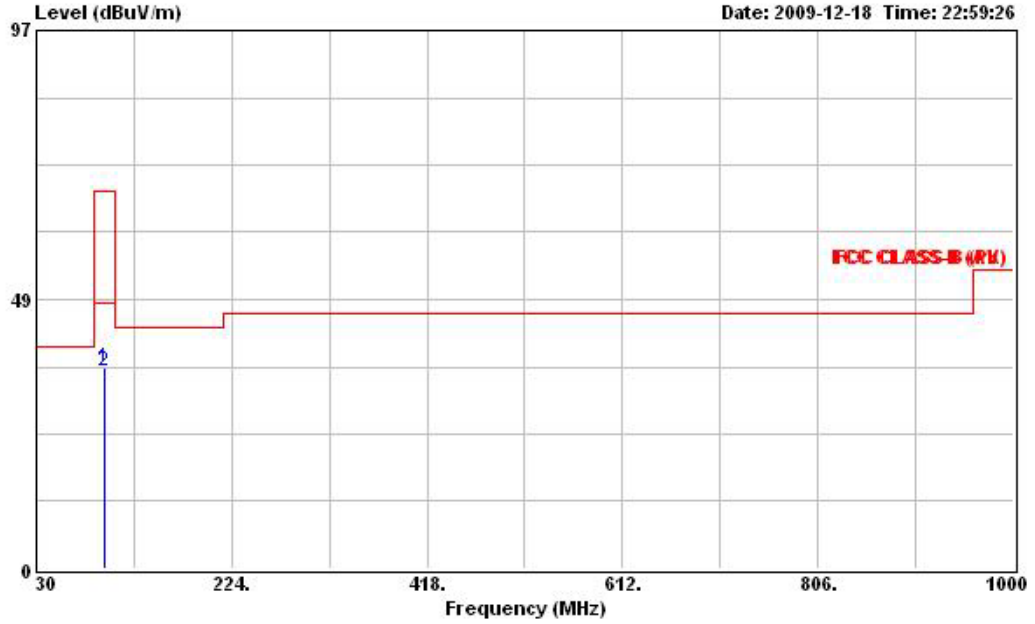


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	36.20	-31.80	68.00	51.09	2.26	10.96	28.11	Peak	121	45
2	96.890	35.58	-12.42	48.00	50.47	2.26	10.96	28.11	Average	121	45



Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 270° / Mode 3		


Horizontal

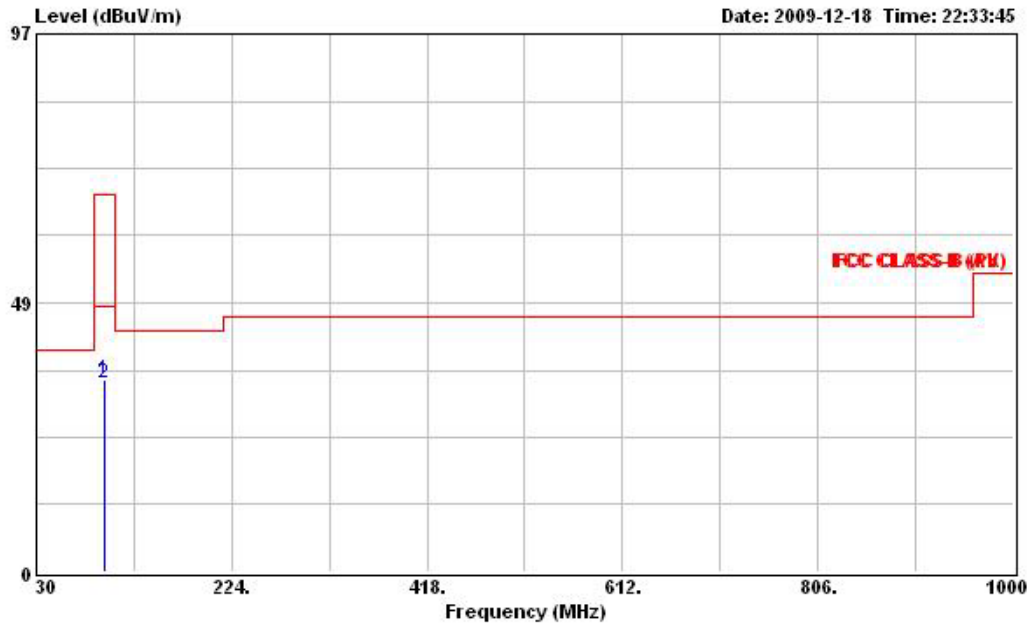

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	34.72	-33.28	68.00	49.61	2.26	10.96	28.11	Peak	388	0
2	96.890	33.88	-14.12	48.00	48.77	2.26	10.96	28.11	Average	388	0

Vertical

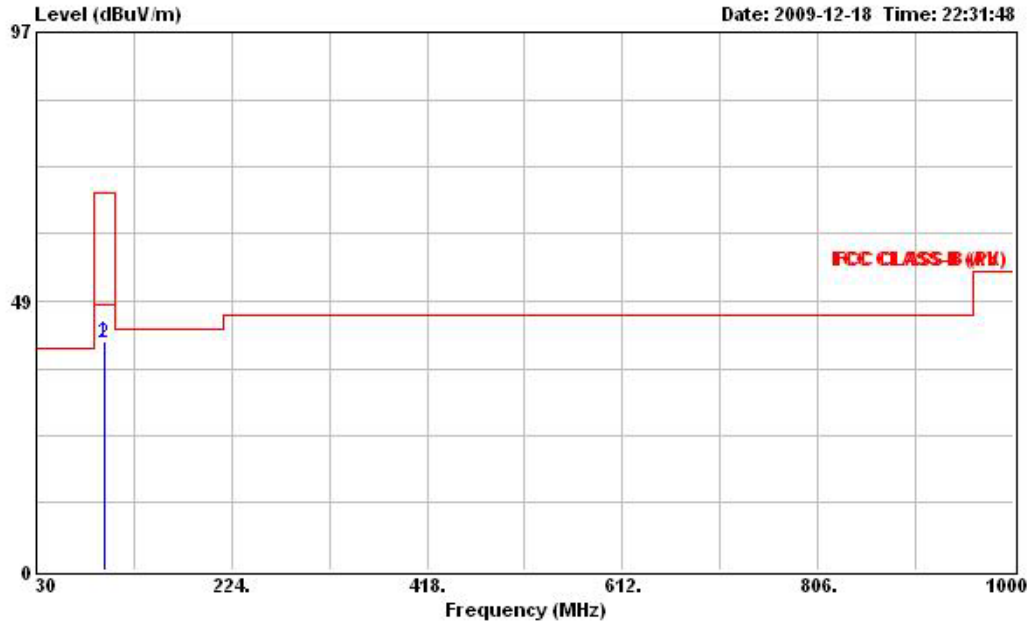


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	41.38	-26.62	68.00	56.27	2.26	10.96	28.11	Peak	100	0
2	96.890	40.95	-7.05	48.00	55.84	2.26	10.96	28.11	Average	100	0

Temperature	20.3°C	Humidity	57.8%
Configurations	96.9 MHz/ 315° / Mode 3		


Horizontal

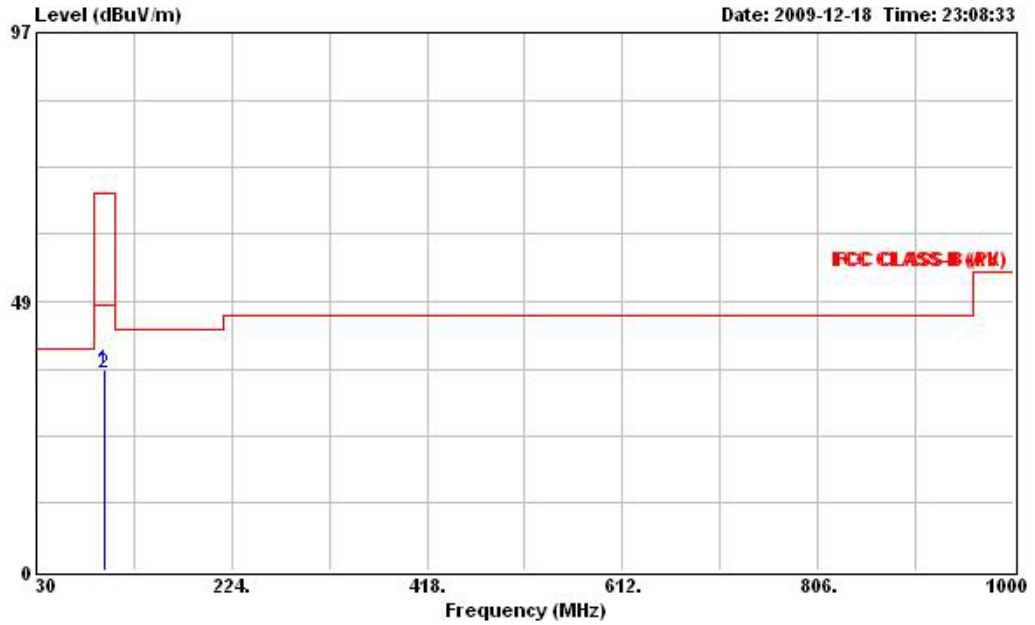

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 Model : XMP05  
 Memo : FCC ID:BGA-XMP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	36.21	-31.79	68.00	51.10	2.26	10.96	28.11	Peak	323	---
2	96.890	35.60	-12.40	48.00	50.49	2.26	10.96	28.11	Average	323	---

Vertical

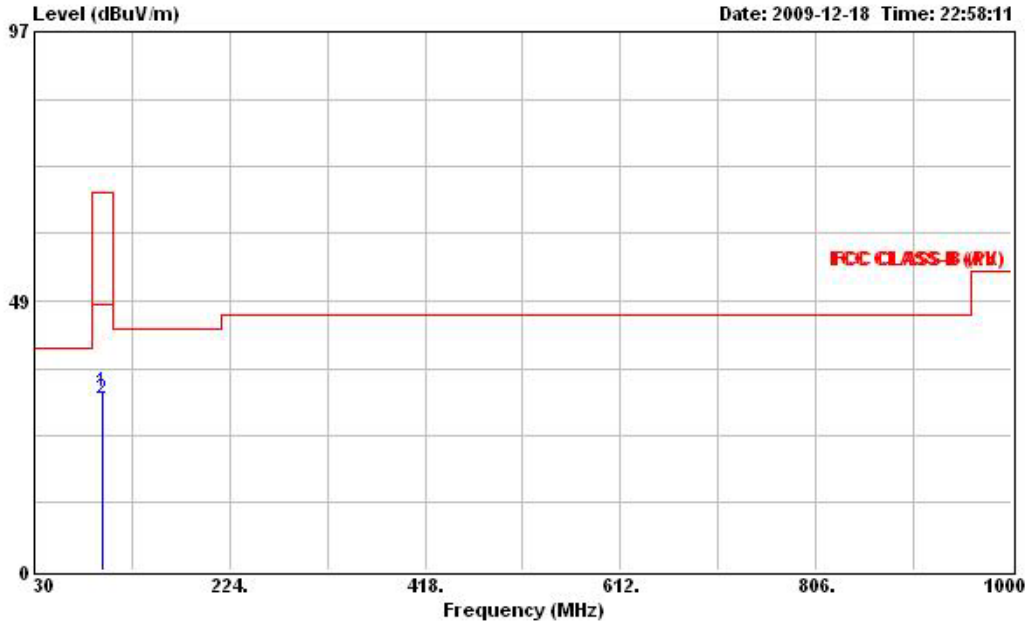

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 Model : XMXP05  
 Memo : FCC ID:BGA-XMXP05  
 Memo : FM 96.9M  
 Memo : FORD IXION  
 Memo : Large CAR  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.890	32.01	-35.99	68.00	46.90	2.26	10.96	28.11	Peak	104	---
2	96.890	30.72	-17.28	48.00	45.61	2.26	10.96	28.11	Average	104	---

#### 4. List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-10M	10CH01-HY	30MHz~1GHz 10m, 3m	Apr. 13, 2009	Radiation (10CH01-HY)
Receiver	R&S	ESI7	838496/009	9kHz-7GHz	Apr. 01 2009	Radiation (10CH01-HY)
Amplifier	Agilent	8447D	2944A10825	100kHz – 1.3GHz	May 26, 2009	Radiation (10CH01-HY)
Turn Table	HD	DT 60 RPS	1513/004/00	0 ~ 360 degree	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/556/00	1 m - 4 m	N/A	Radiation (10CH01-HY)
RF Cable-R10m	Suhner Switzerland + Rosenberger	RG223/U + UAA220A-0	CB022-DOOR	30MHz~1GHz	Nov. 24, 2009	Radiation (10CH01-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2681	30MHz –1GHz	Dec. 21 2008	Radiation (10CH01-HY)