

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Star Light Electronics Co., Ltd.

**5/F., Shing Dao Industrial Building, 232 Aberdeen Main Road, Aberdeen,
Hong Kong**

E.U.T.: Pedestal Karaoke System

Model Name: iSM1030BT

Brand Name: The Singing Machine

FCC ID: BGRISM1030BT

Report Number: NTC1306810F

Test Date(s): June 14, 2013 to July 10, 2013

Report Date(s): July 10, 2013

Prepared by

Dongguan NTC Co., Ltd.

**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong Province, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Rose Hu / Engineer



Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan NTC Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	5
1.6 TEST FACILITY AND LOCATION.....	5
1.7 SUMMARY OF TEST RESULTS	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION	7
2.2 SPECIAL ACCESSORIES.....	7
2.3 DESCRIPTION OF TEST MODES	7
2.4 EUT EXERCISE	7
3. CONDUCTED EMISSIONS TEST	8
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	8
3.2 TEST CONDITION	8
3.3 MEASUREMENT RESULTS.....	8
4. RADIATED EMISSION TEST.....	11
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
4.2 MEASUREMENT PROCEDURE	12
4.3 LIMIT.....	13
4.4 MEASUREMENT RESULTS	14
5. CHANNEL SEPARATION TEST.....	21
5.1 MEASUREMENT PROCEDURE	21
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	21
5.3 MEASUREMENT RESULTS.....	21
6. 20DB BANDWIDTH.....	27
6.1 MEASUREMENT PROCEDURE	27
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
6.3 MEASUREMENT RESULTS.....	27
7. HOPPING CHANNEL NUMBER	33
7.1 MEASUREMENT PROCEDURE	33
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	33
7.3 MEASUREMENT RESULTS.....	33

8. TIME OF OCCUPANCY (DWELL TIME).....	35
8.1 MEASUREMENT PROCEDURE	35
8.2 MEASUREMENT RESULTS.....	35
9. MAXIMUM PEAK OUTPUT POWER	35
9.1 MEASUREMENT PROCEDURE	41
9.2 MEASUREMENT RESULTS.....	41
10. BAND EDGE	41
10.1 MEASUREMENT PROCEDURE	47
10.2 LIMIT.....	47
10.3 MEASUREMENT RESULTS.....	47
11. ANTENNA APPLICATION	47
11.1 ANTENNA REQUIREMENT	54
11.2 MEASUREMENT RESULTS.....	54
12. CONDUCTED SPURIOUS EMISSIONS	55
12.1 MEASUREMENT PROCEDURE	55
12.2. MEASUREMENT RESULTS.....	55
13. TEST EQUIPMENT LIST.....	59

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a Pedestal Karaoke System with AUX IN, CD Playing, USB Playing, FM and BT functions which is powered by AC Mains. For more details features, please refer to User's Manual.

Manufacturer	: Star Light Electronics Co., Ltd.
Address	: 5/F., Shing Dao Industrial Building, 232 Aberdeen Main Road, Aberdeen, Hong Kong
Frequency:	: 2402-2480MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel	: 79
Channel space	: 1MHz
Max RF Output Power	: -0.40dBm (0.91 mW)
Antenna Type	: PCB
Antenna Gain	: +2dBi (Declaration by applicant)
Power Supply	: AC 120V 60Hz
Model name	: iSM1030BT
Note:	: None

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: BGRISM1030BT filing to comply with Section 15.247 of the FCC Part 15 (2012), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 9743A-1.

Dongguan NTC Co., Ltd.

Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d), §15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK, 8DPSK were tested.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

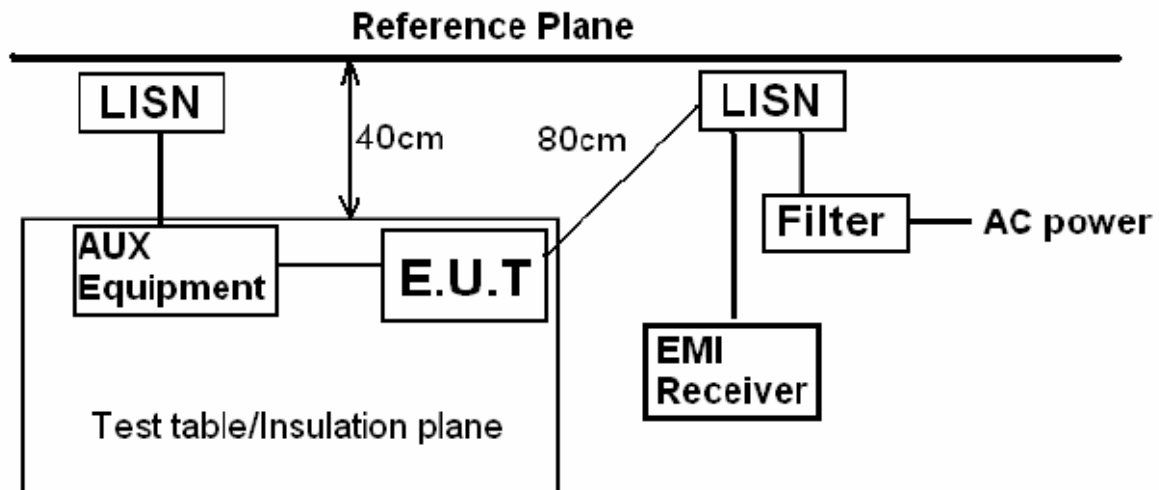

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: BT Mode

3.3 Measurement Results


Please refer to following plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Conduction

Test Time: 2013-6-25 11:49:40

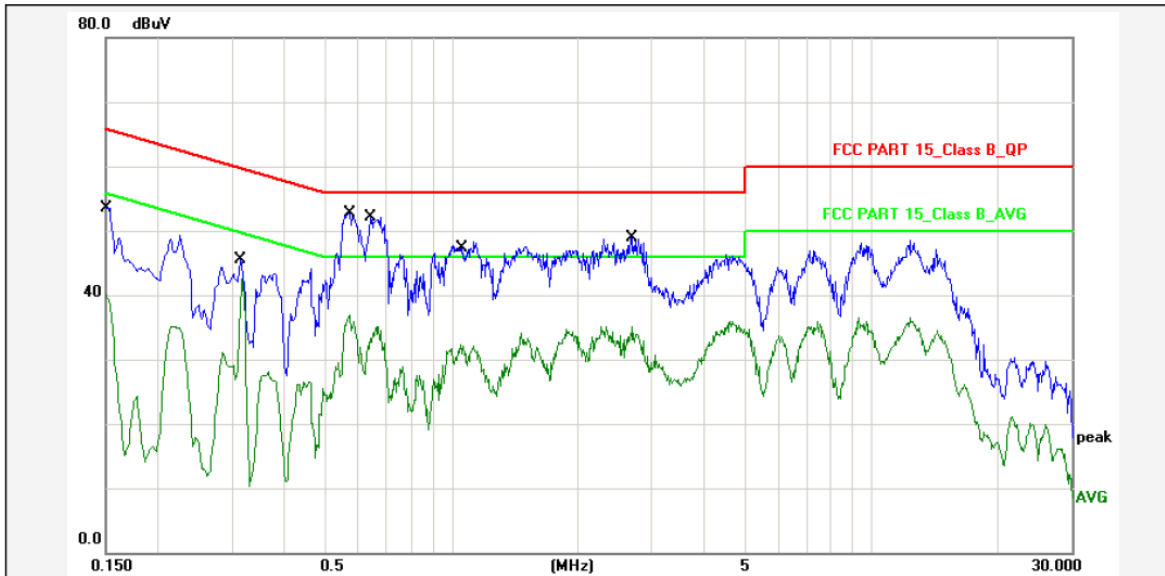

Report No.: ISM1030BT

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Star Light Electronics Co., Ltd

Temp.()/Hum.(%): 25(C) / 60 %

Product: Pedestal Karaoke System

Power Rating: AC 120V/60Hz

Model No.: ISM1030BT

Test Engineer: Sance

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	40.80	51.60	65.99	-14.39	QP	P	
2	0.1500	10.80	27.40	38.20	55.99	-17.79	AVG	P	
3	0.3140	10.80	32.70	43.50	59.86	-16.36	QP	P	
4	0.3140	10.80	29.80	40.60	49.86	-9.26	AVG	P	
5	0.5740	10.80	39.90	50.70	56.00	-5.30	QP	P	
6	0.5740	10.80	24.00	34.80	46.00	-11.20	AVG	P	
7	0.6419	10.80	39.40	50.20	56.00	-5.80	QP	P	
8	0.6419	10.80	22.30	33.10	46.00	-12.90	AVG	P	
9	1.0540	10.80	35.50	46.30	56.00	-9.70	QP	P	
10	1.0540	10.80	19.50	30.30	46.00	-15.70	AVG	P	
11	2.7060	10.80	36.00	46.80	56.00	-9.20	QP	P	
12	2.7060	10.80	22.30	33.10	46.00	-12.90	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2013-6-25 11:52:42

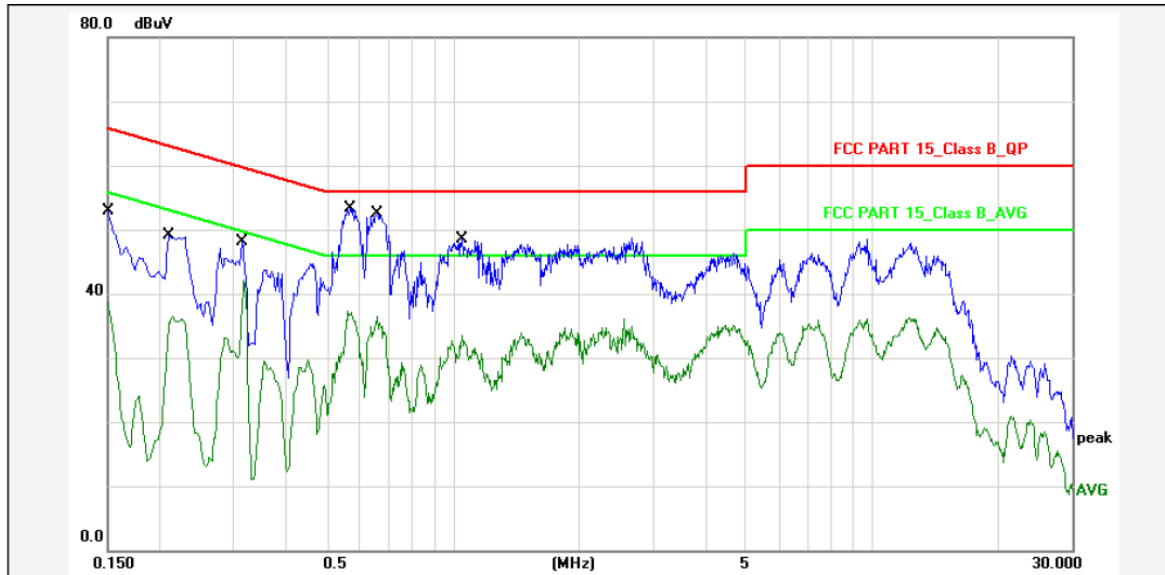

Report No.: iSM1030BT

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Star Light Electronics Co., Ltd

Temp.()/Hum.(%): 25(C) / 60 %

Product: Pedestal Karaoke System

Power Rating: AC 120V/60Hz

Model No.: iSM1030BT

Test Engineer: Sance

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	39.90	50.70	65.99	-15.29	QP	P	
2	0.1500	10.80	25.90	36.70	55.99	-19.29	AVG	P	
3	0.2100	10.80	36.20	47.00	63.20	-16.20	QP	P	
4	0.2100	10.80	23.60	34.40	53.20	-18.80	AVG	P	
5	0.3140	10.80	35.40	46.20	59.86	-13.66	QP	P	
6	0.3140	10.80	29.30	40.10	49.86	-9.76	AVG	P	
7	0.5620	10.80	40.50	51.30	56.00	-4.70	QP	P	
8	0.5620	10.80	24.60	35.40	46.00	-10.60	AVG	P	
9	0.6580	10.80	39.70	50.50	56.00	-5.50	QP	P	
10	0.6580	10.80	23.70	34.50	46.00	-11.50	AVG	P	
11	1.0540	10.80	35.70	46.50	56.00	-9.50	QP	P	
12	1.0540	10.80	20.70	31.50	46.00	-14.50	AVG	P	


Note: Level=Reading+Factor.

Margin=Limit-Level.


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

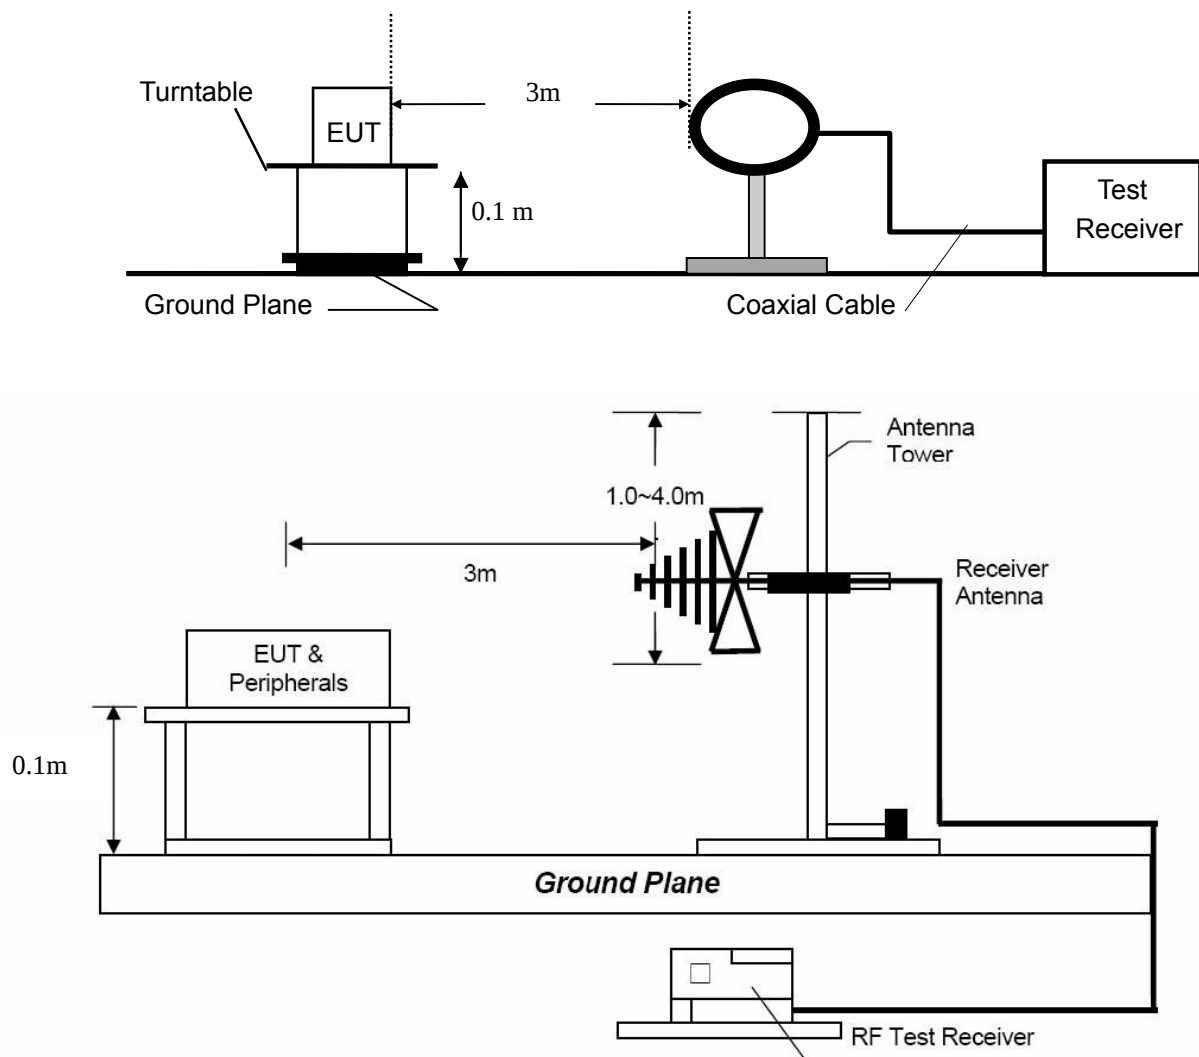

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

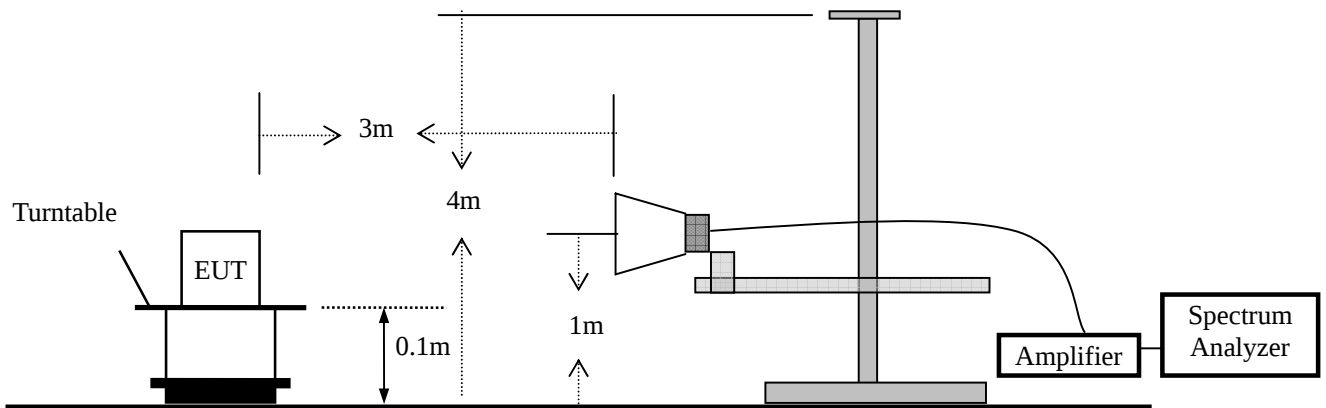

4.2 Measurement Procedure

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

4.4 Measurement Results

Operation Mode: TX
Frequency Range: 9KHz~1GHz
Test Result: PASS
Measured Distance: 3m
Test Date: June 24, 2013

Temperature: 23 °C
Humidity: 54 %
Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
34.8500	V	32.09	40.00	-7.91	QP
133.7899	V	40.19	43.50	-3.31	QP
288.0199	V	31.02	46.00	-14.98	QP
432.5500	V	35.91	46.00	-10.09	QP
867.1100	V	36.78	46.00	-9.22	QP
960.2300	V	35.99	54.00	-18.01	QP
133.7899	H	36.76	43.50	-6.74	QP
408.3000	H	39.75	46.00	-6.25	QP
432.5500	H	42.57	46.00	-3.43	QP
480.0799	H	39.66	46.00	-6.34	QP
867.1100	H	36.69	46.00	-9.31	QP
960.2300	H	37.32	54.00	-16.68	QP

Other emissions are lower than 10dB below the allowable limit.

Note: (1) Quasi-Peak detector is used except for others stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB.

Modulation: GFSK
(Low Frequency: 2402MHz)
Operation Mode: TX Mode (Low) Test Date : June 24, 2013
Frequency Range: 1-25GHz Temperature : 23 °C
Test Result: PASS Humidity : 54 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	53.71	43.04	74.00	54.00	-20.29	-10.96
7206	V	54.56	43.57	74.00	54.00	-19.44	-10.43
9608	V	54.05	43.00	74.00	54.00	-19.95	-11.00
12010	V	54.71	42.80	74.00	54.00	-19.29	-11.20
4804	H	54.21	44.04	74.00	54.00	-19.79	-9.96
7206	H	53.74	43.55	74.00	54.00	-20.26	-10.45
9608	H	55.90	44.33	74.00	54.00	-18.10	-9.67
12010	H	54.69	43.45	74.00	54.00	-19.31	-10.55

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Modulation: GFSK
(Mid Frequency: 2441MHz)
Operation Mode: TX Mode (Mid) Test Date : June 24, 2013
Frequency Range: 1-25GHz Temperature : 23 °C
Test Result: PASS Humidity : 54 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	52.97	40.05	74.00	54.00	-21.03	-13.95
7323	V	51.89	39.68	74.00	54.00	-22.11	-14.32
9764	V	51.72	38.53	74.00	54.00	-22.28	-15.47
12205	V	50.58	39.50	74.00	54.00	-23.42	-14.50
4882	H	53.96	39.04	74.00	54.00	-20.04	-14.96
7323	H	53.75	40.73	74.00	54.00	-20.25	-13.27
9764	H	52.57	40.75	74.00	54.00	-21.43	-13.25
12205	H	52.90	39.69	74.00	54.00	-21.10	-14.31

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Modulation: GFSK
 (High Frequency: 2480MHz)
 Operation Mode: TX Mode (High) Test Date : June 24, 2013
 Frequency Range: 1-25GHz Temperature : 23 °C
 Test Result: PASS Humidity : 54 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	54.27	39.54	74.00	54.00	-19.73	-14.46
7440	V	54.20	41.50	74.00	54.00	-19.80	-12.50
9920	V	55.53	41.61	74.00	54.00	-18.47	-12.39
12400	V	53.76	38.60	74.00	54.00	-20.24	-15.40
4960	H	54.17	40.32	74.00	54.00	-19.83	-13.68
7440	H	54.91	40.75	74.00	54.00	-19.09	-13.25
9920	H	54.69	40.80	74.00	54.00	-19.31	-13.20
12400	H	52.48	38.02	74.00	54.00	-21.52	-15.98

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ± 3.7 dB

Modulation: $\pi/4$ -DQPSK
(Low Frequency: 2402MHz)
Operation Mode: TX Mode (Low) Test Date : June 24, 2013
Frequency Range: 1-25GHz Temperature : 23 °C
Test Result: PASS Humidity : 54 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	53.21	38.93	74.00	54.00	-20.79	-15.07
7206	V	54.18	38.79	74.00	54.00	-19.82	-15.21
9608	V	54.47	39.55	74.00	54.00	-19.53	-14.45
12010	V	53.60	39.66	74.00	54.00	-20.40	-14.34
4804	H	54.27	39.52	74.00	54.00	-19.73	-14.48
7206	H	54.76	40.78	74.00	54.00	-19.24	-13.22
9608	H	53.87	41.53	74.00	54.00	-20.13	-12.47
12010	H	53.62	39.40	74.00	54.00	-20.38	-14.60

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Modulation: $\pi/4$ -DQPSK
(Mid Frequency: 2441MHz)
Operation Mode: TX Mode (Mid) Test Date : June 24, 2013
Frequency Range: 1-25GHz Temperature : 23 °C
Test Result: PASS Humidity : 54 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	54.33	39.22	74.00	54.00	-19.67	-14.78
7323	V	53.88	39.66	74.00	54.00	-20.12	-14.34
9764	V	53.22	40.20	74.00	54.00	-20.78	-13.80
12205	V	52.45	38.77	74.00	54.00	-21.55	-15.23
4882	H	54.27	40.12	74.00	54.00	-19.73	-13.88
7323	H	53.45	40.54	74.00	54.00	-20.55	-13.46
9764	H	53.43	39.58	74.00	54.00	-20.57	-14.42
12205	H	52.70	39.72	74.00	54.00	-21.30	-14.28

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Modulation: $\pi/4$ -DQPSK
(High Frequency: 2480MHz)
Operation Mode: TX Mode (High) Test Date : June 24, 2013
Frequency Range: 1-25GHz Temperature : 23 °C
Test Result: PASS Humidity : 54 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	54.06	39.35	74.00	54.00	-19.94	-14.65
7440	V	54.65	39.90	74.00	54.00	-19.35	-14.10
9920	V	54.63	39.84	74.00	54.00	-19.37	-14.16
12400	V	53.25	38.55	74.00	54.00	-20.75	-15.45
4960	H	53.88	40.15	74.00	54.00	-20.12	-13.85
7440	H	54.53	39.63	74.00	54.00	-19.47	-14.37
9920	H	54.50	40.91	74.00	54.00	-19.50	-13.09
12400	H	53.34	38.58	74.00	54.00	-20.66	-15.42

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

5. Channel Separation test

5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	July 03, 2013
Temperature :	25 °C	Humidity :	53 %
Test Result:	PASS		


Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
GFSK			
Lowest	2402	1000	>746.7
Middle	2441	1000	>746.7
Highest	2480	1010	>746.7
$\pi/4$ -DQPSK			
Lowest	2402	1000	>940
Middle	2441	1000	>940
Highest	2480	1000	>940
8DPSK			
Lowest	2402	1000	>940
Middle	2441	1010	>940
Highest	2480	1000	>940

GFSK Lowest Channel

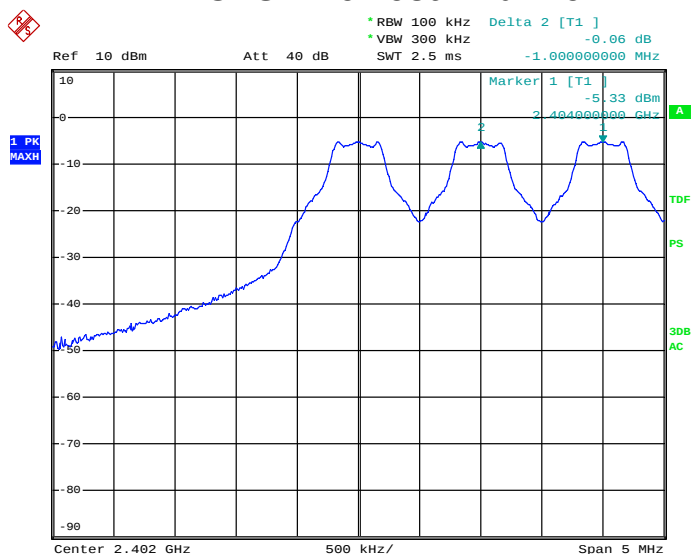


Date: 3.JUL.2013 19:38:36

GFSK Middle Channel

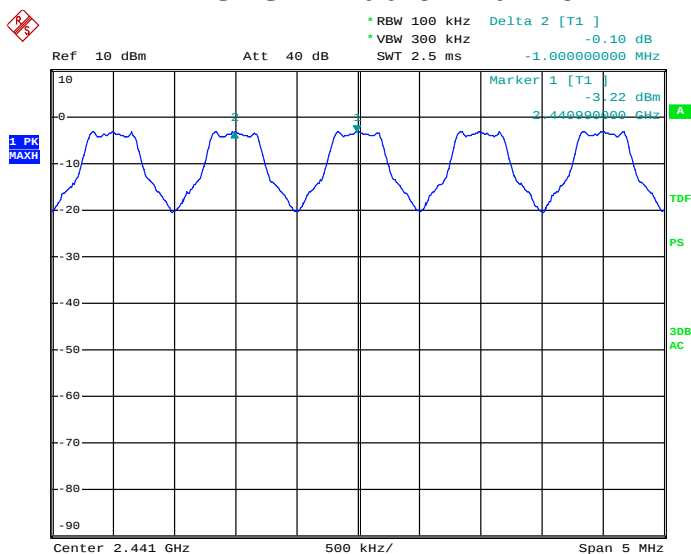


Date: 3.JUL.2013 19:40:49

GFSK Highest Channel

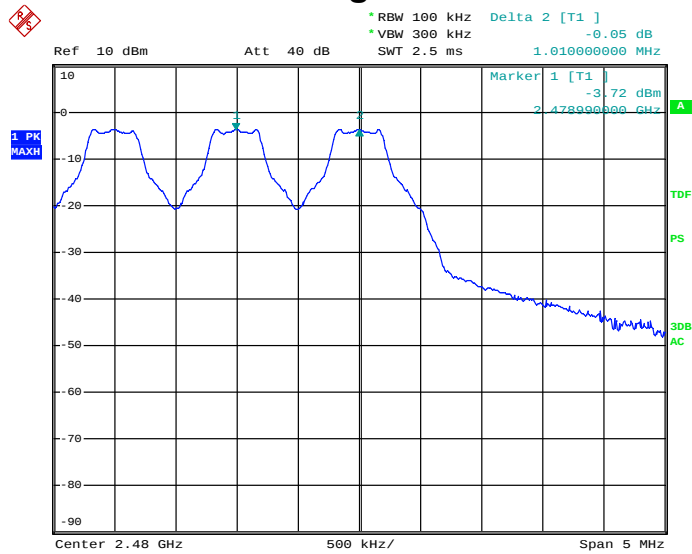


Date: 3.JUL.2013 19:42:38

$\pi/4$ -DQPSK Lowest Channel

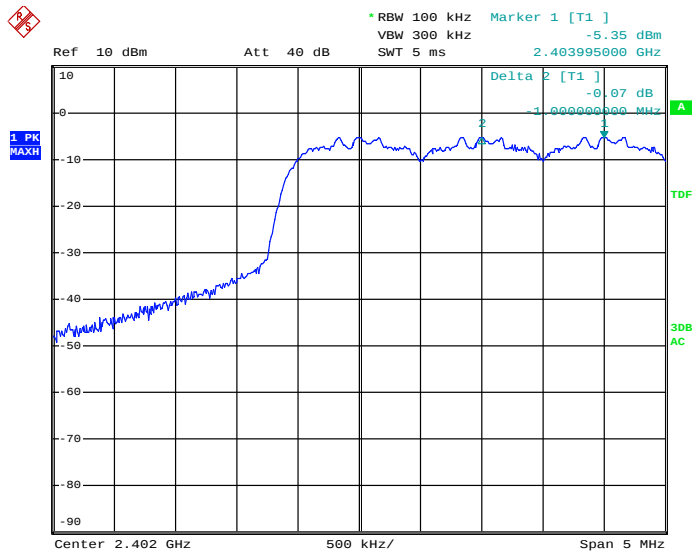


Date: 3.JUL.2013 19:45:00

$\pi/4$ -DQPSK Middle Channel

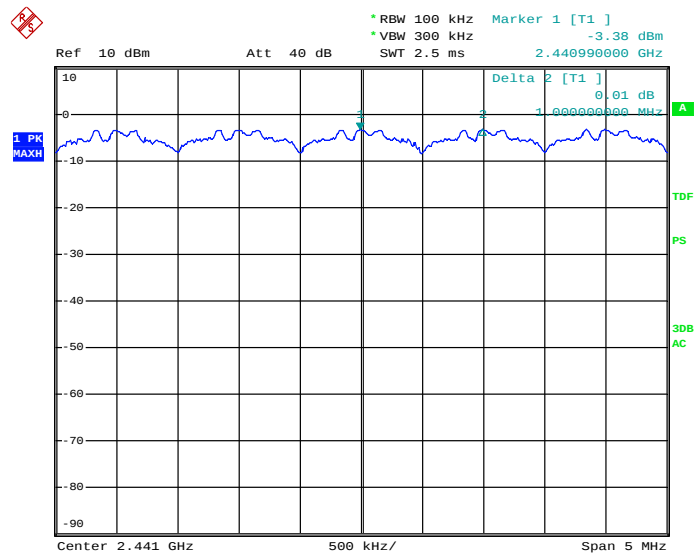


Date: 3.JUL.2013 19:52:39

$\pi/4$ -DQPSK Highest Channel

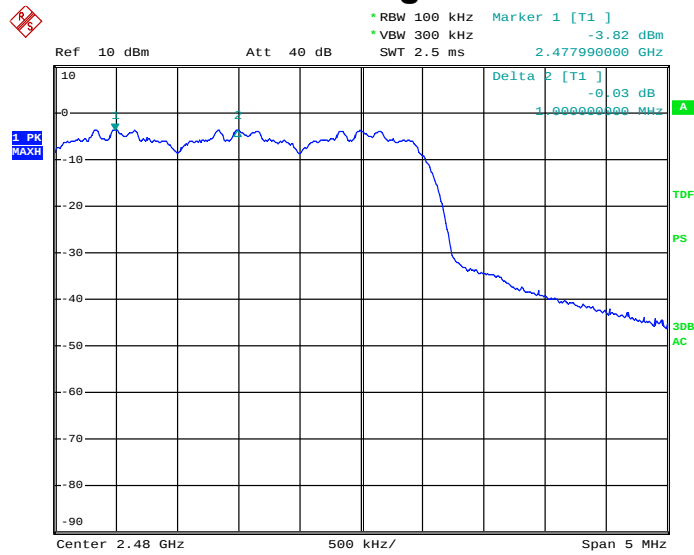


Date: 3.JUL.2013 19:56:31

8DPSK Lowest Channel

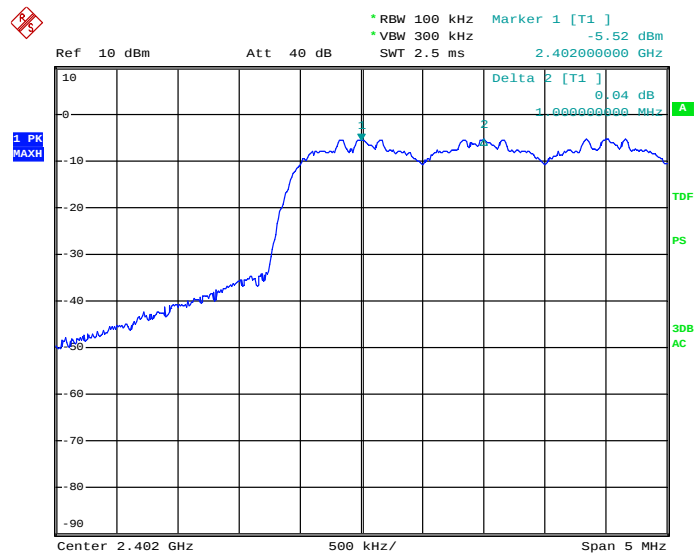


Date: 3.JUL.2013 20:01:08

8DPSK Middle Channel

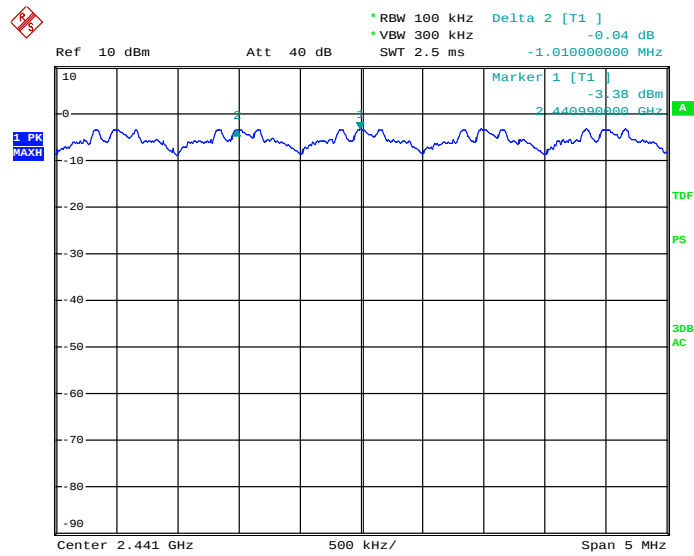

Date: 3.JUL.2013 20:05:35

8DPSK Highest Channel

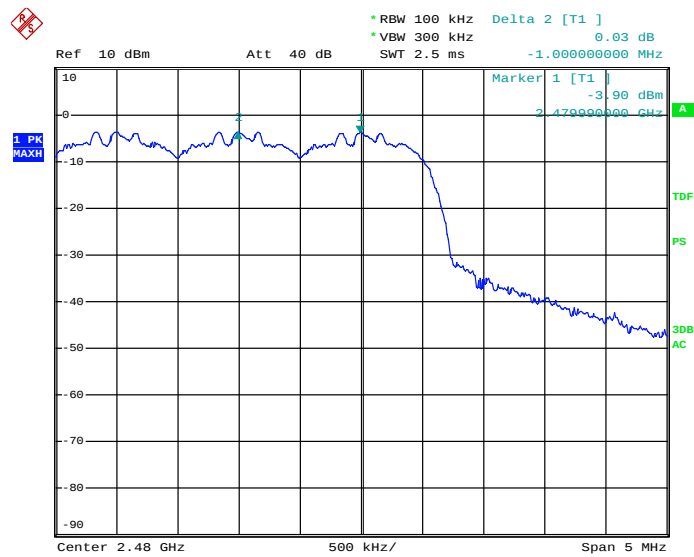

Date: 3.JUL.2013 20:08:06


6. 20dB Bandwidth

6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Refer to attached data chart.

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	July 03, 2013
Temperature :	25 °C	Humidity :	53 %
Test Result:	PASS		


Channel frequency (MHz)	20dB Down BW(kHz)
GFSK	
2402	1120
2441	1110
2480	1120
$\pi/4$ -DQPSK	
2402	1400
2441	1400
2480	1410
8DPSK	
2402	1400
2441	1410
2480	1410

GFSK Lowest Channel

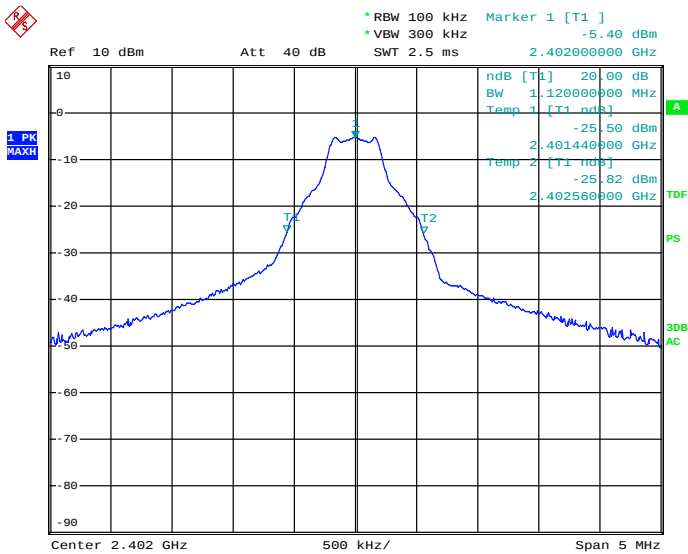


Date: 3.JUL.2013 19:37:34

GFSK Middle Channel

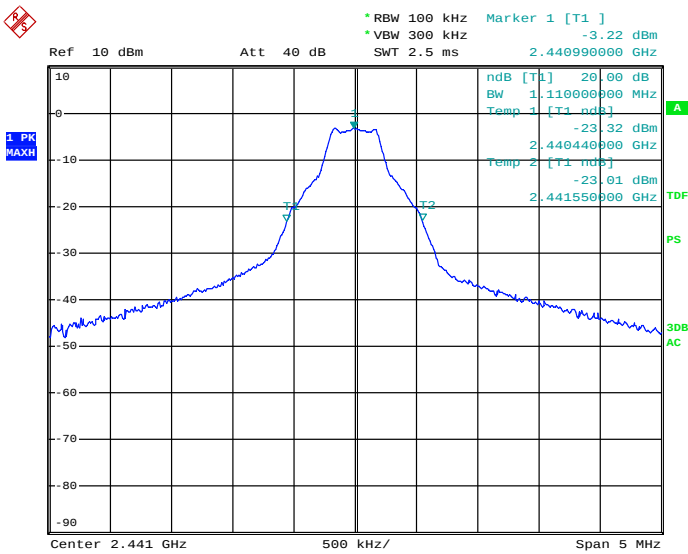


Date: 3.JUL.2013 19:39:39

GFSK Highest Channel

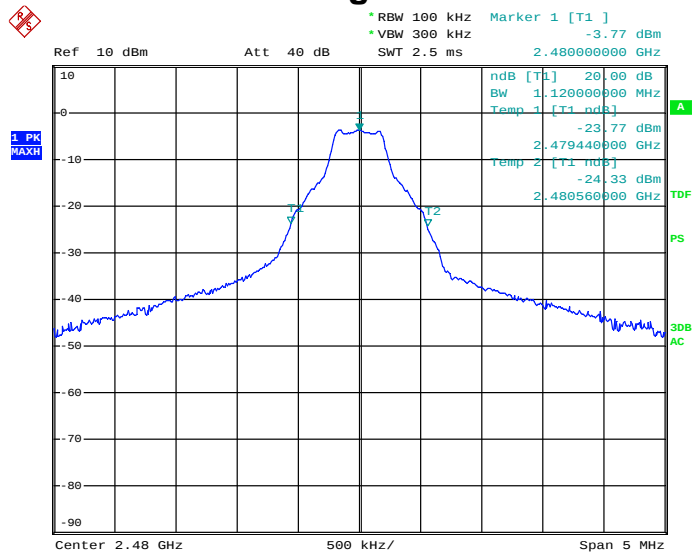


Date: 3.JUL.2013 19:42:01

$\pi/4$ -DQPSK Lowest Channel

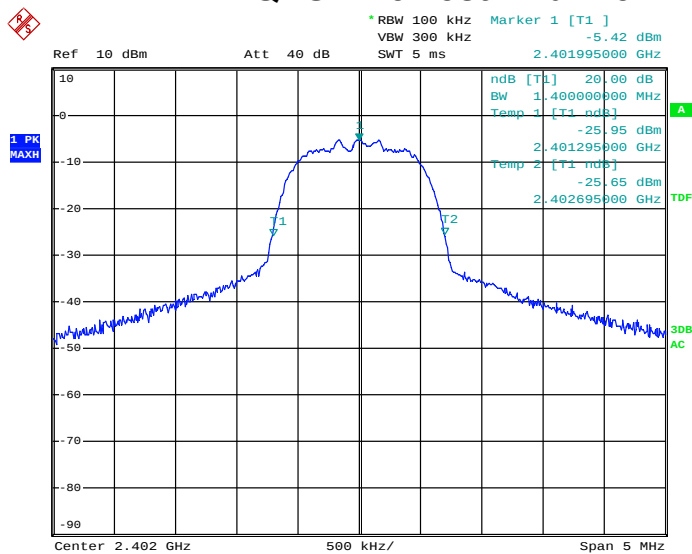


Date: 3.JUL.2013 19:44:07

$\pi/4$ -DQPSK Middle Channel

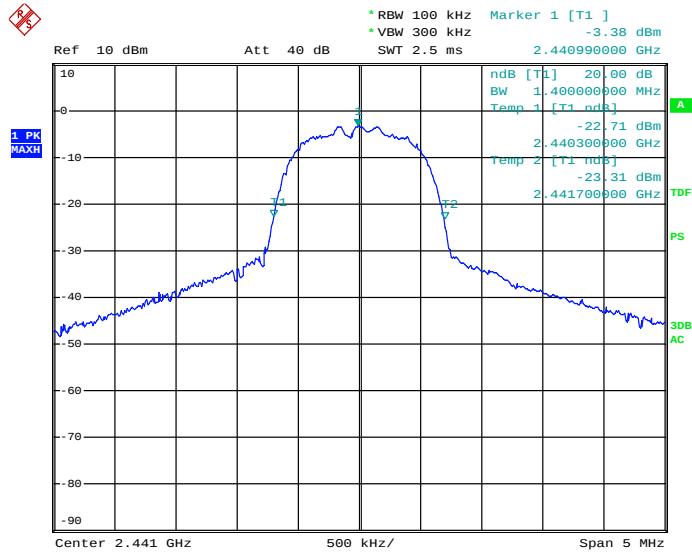


Date: 3.JUL.2013 19:46:23

$\pi/4$ -DQPSK Highest Channel

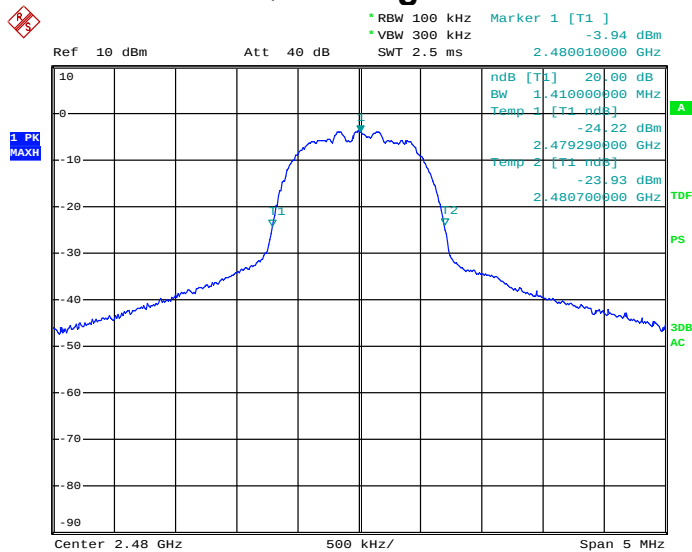


Date: 3.JUL.2013 19:54:20

8DPSK Lowest Channel

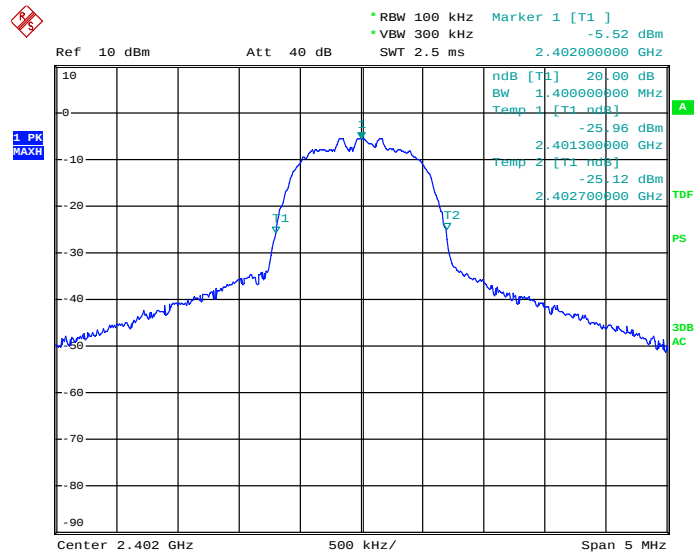


Date: 3.JUL.2013 19:58:08

8DPSK Middle Channel

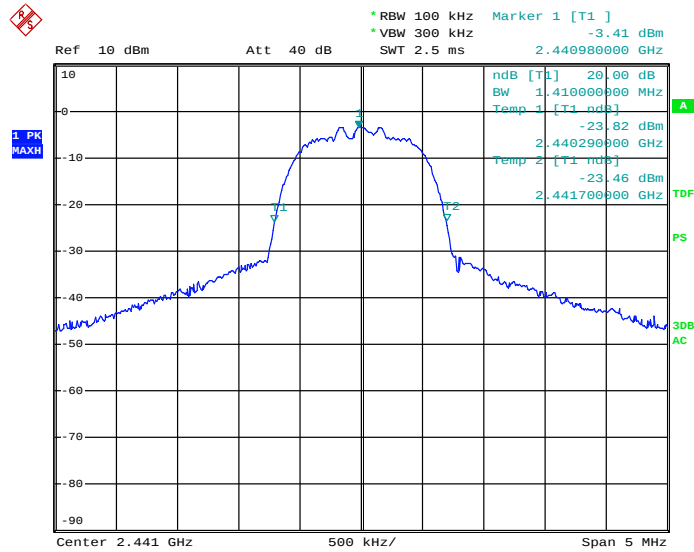

Date: 3.JUL.2013 20:02:34

8DPSK Highest Channel

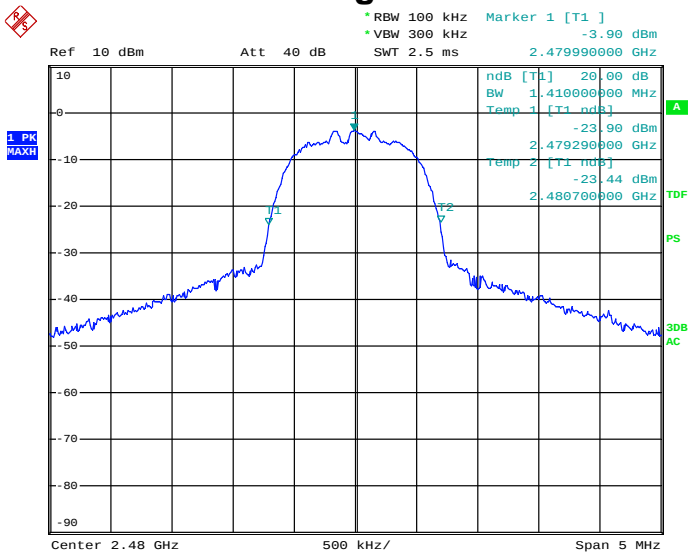

Date: 3.JUL.2013 20:06:43


7. Hopping Channel Number

7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	July 03, 2013
Temperature :	25 °C	Humidity :	53%
Test Result:	PASS		


Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥15

GFSK

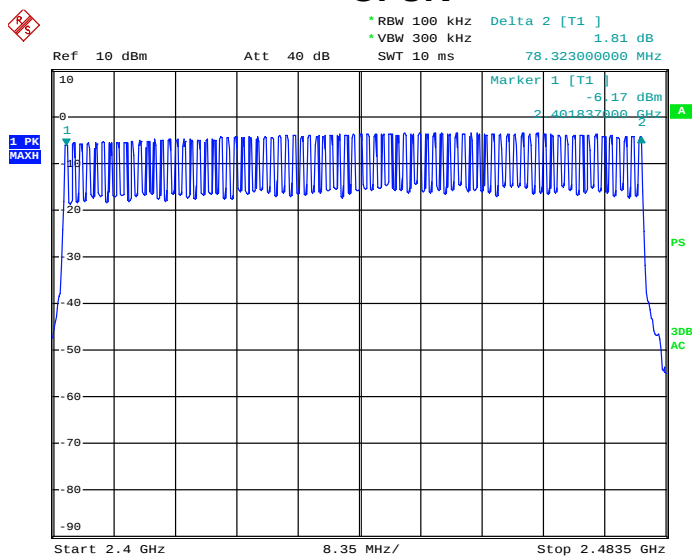

Date: 3.JUL.2013 20:41:01

$\pi/4$ -DQPSK

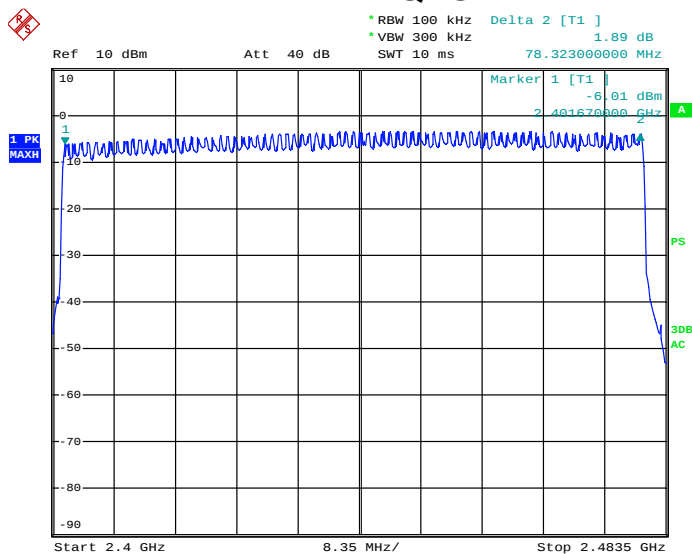

Date: 3.JUL.2013 21:21:51

8. Time of Occupancy (Dwell Time)

8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Temperature :	25 °C	Humidity :	53%
Test Date :	July 03, 2013	Test Result:	PASS


Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2402	$0.395(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 126.4$	400
DH3	2402	$1.655(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 264.8$	400
DH5	2402	$2.915(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 310.9$	400
$\pi/4$ -DQPSK			
2-DH1	2402	$0.410(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 131.2$	400
2-DH3	2402	$1.660(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 265.6$	400
2-DH5	2402	$2.935(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 313.1$	400
8DPSK			
3-DH1	2402	$0.410(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 131.2$	400
3-DH3	2402	$1.660(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 265.6$	400
3-DH5	2402	$2.920(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 311.5$	400

GFSK DH1

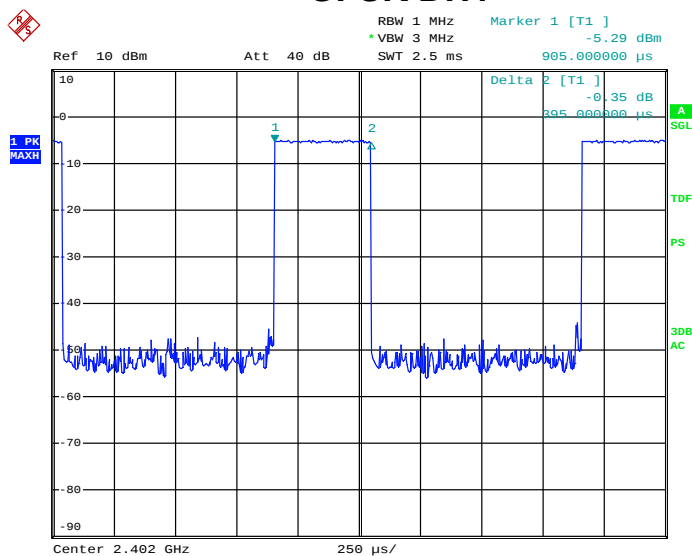


Date: 3.JUL.2013 20:13:27

GFSK DH3

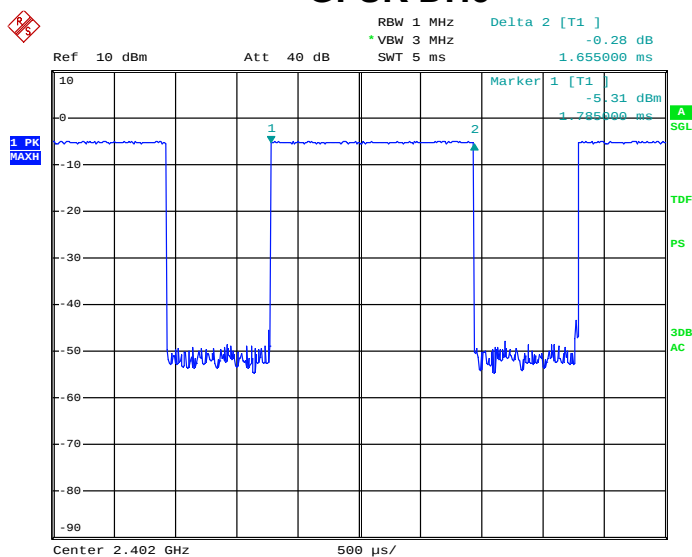


Date: 3.JUL.2013 20:14:05

GFSK DH5

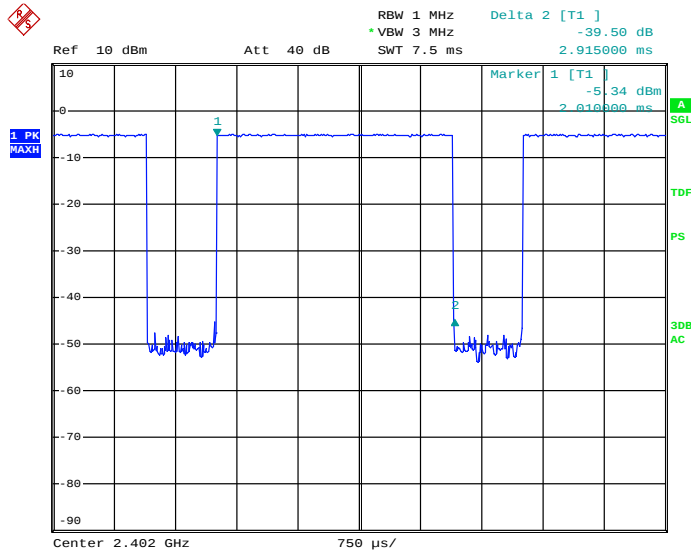


Date: 3.JUL.2013 20:14:44

$\pi/4$ -DQPSK 2-DH1

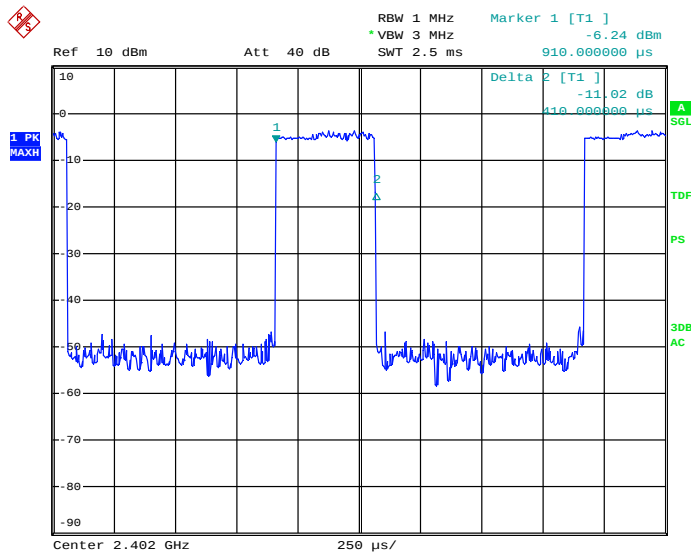


Date: 3.JUL.2013 20:15:33

$\pi/4$ -DQPSK 2-DH3

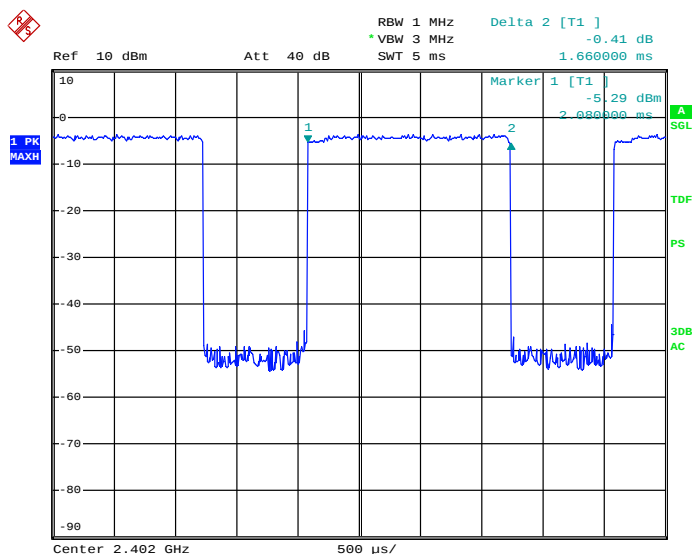


Date: 3.JUL.2013 20:16:07

$\pi/4$ -DQPSK 2-DH5

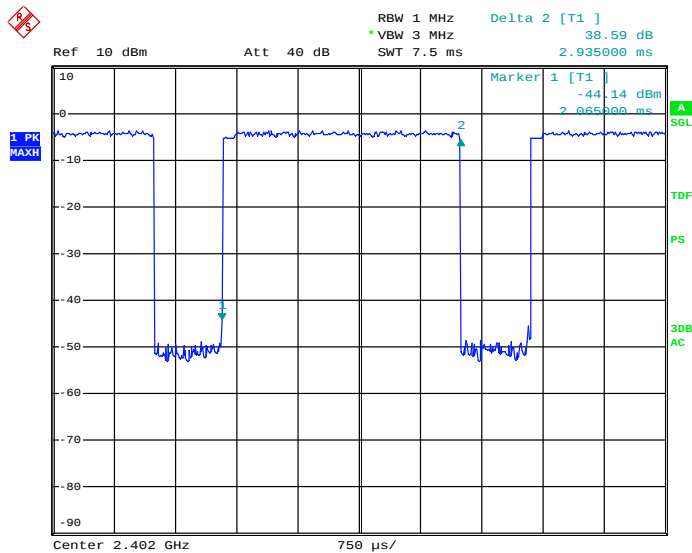


Date: 3.JUL.2013 20:16:42

8DPSK 3-DH1

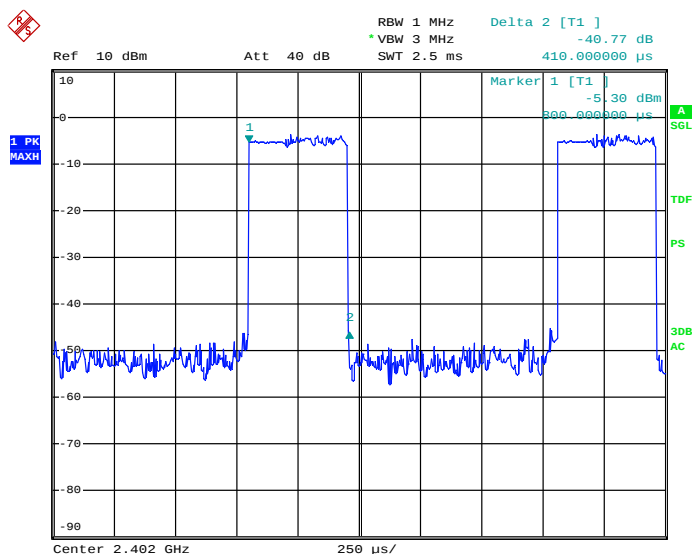


Date: 3.JUL.2013 20:17:23

8DPSK 3-DH3

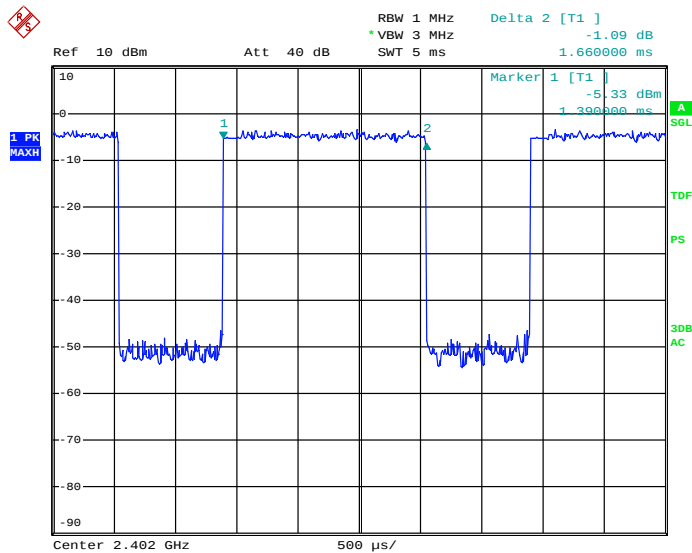

Date: 3.JUL.2013 20:18:02

8DPSK 3-DH5

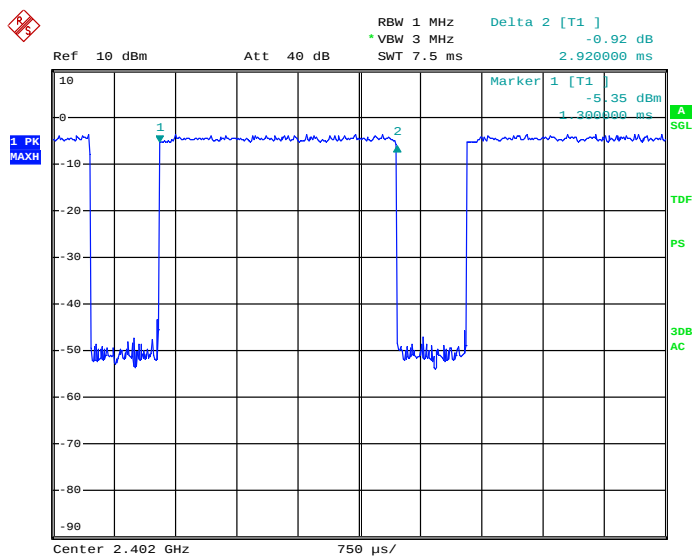

Date: 3.JUL.2013 20:18:32

9. MAXIMUM PEAK OUTPUT POWER

9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


9.2 Measurement Results

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	3MHz	VBW :	3MHz
Spectrum Detector:	PK	Test Date :	July 03, 2013
Test By:	Sance	Test Result:	PASS
Temperature :	25°C	Humidity :	52%


Channel Frequency (MHz)	Cable Loss dB	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
GFSK					
2402.00	1.5	0.37	-4.33	21	PASS
2441.00	1.5	0.61	-2.12	21	PASS
2480.00	1.5	0.54	-2.71	21	PASS
$\pi/4$ -DQPSK					
2402.00	1.5	0.56	-2.53	21	PASS
2441.00	1.5	0.91	-0.40	21	PASS
2480.00	1.5	0.80	-0.99	21	PASS
8DPSK					
2402.00	1.5	0.56	-2.49	21	PASS
2441.00	1.5	0.90	-0.45	21	PASS
2480.00	1.5	0.81	-0.92	21	PASS

GFSK Lowest Channel

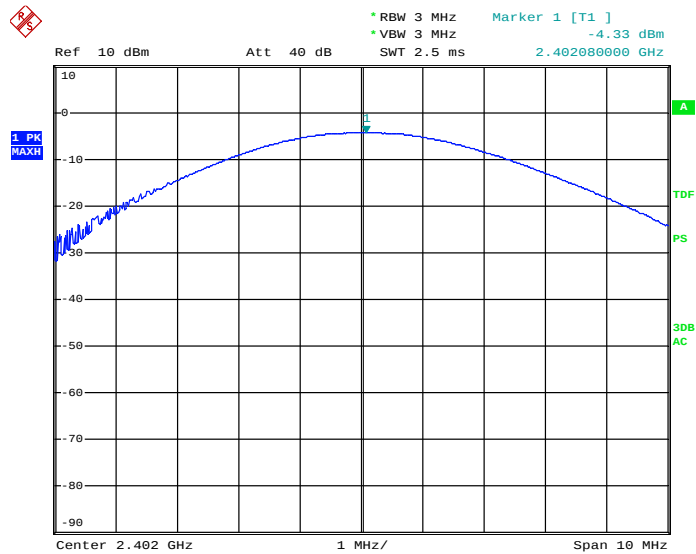


Date: 3.JUL.2013 20:20:38

GFSK Middle Channel

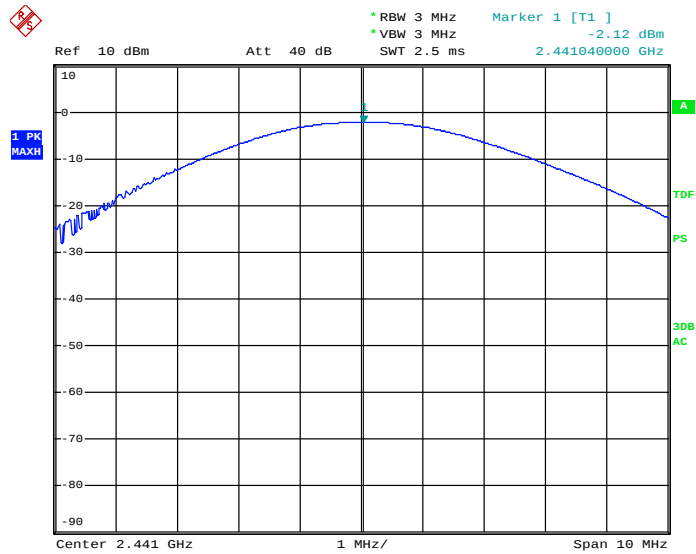


Date: 3.JUL.2013 20:21:02

GFSK Highest Channel

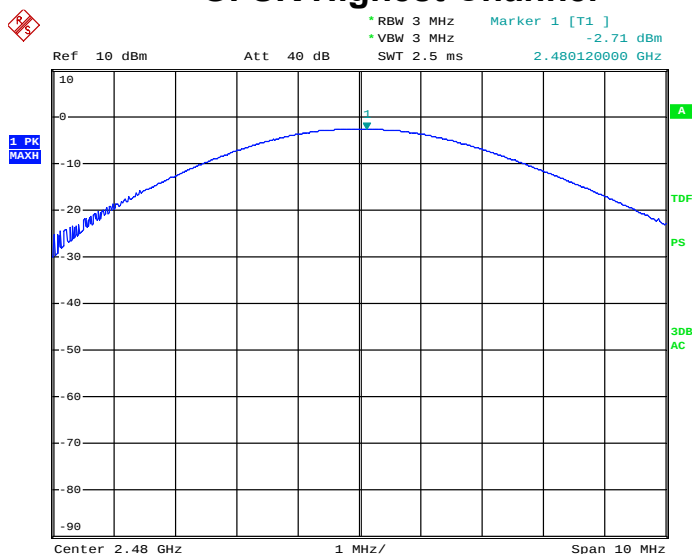


Date: 3.JUL.2013 20:21:16

$\pi/4$ -DQPSK Lowest Channel

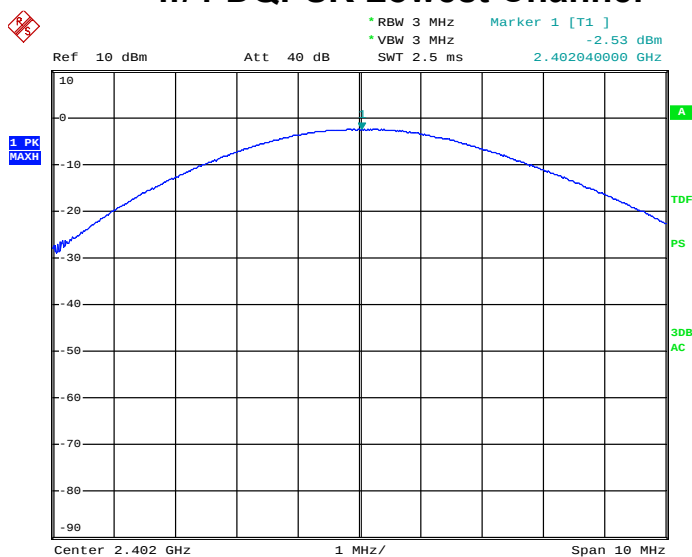


Date: 3.JUL.2013 20:21:31

$\pi/4$ -DQPSK Middle Channel

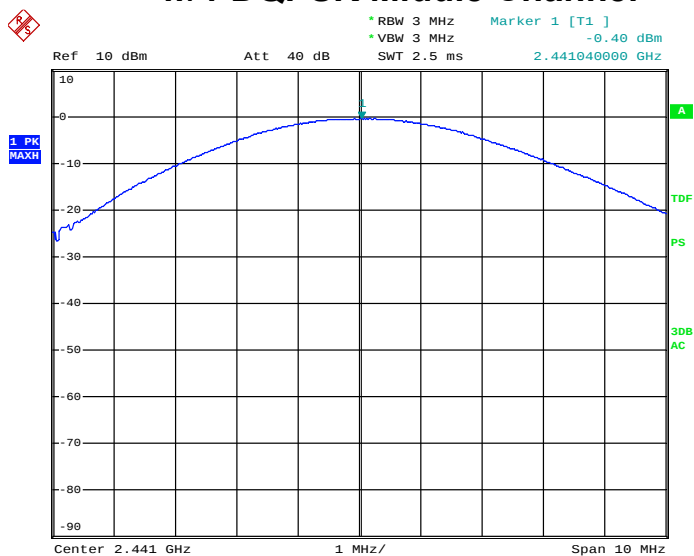


Date: 3.JUL.2013 20:21:52

$\pi/4$ -DQPSK Highest Channel

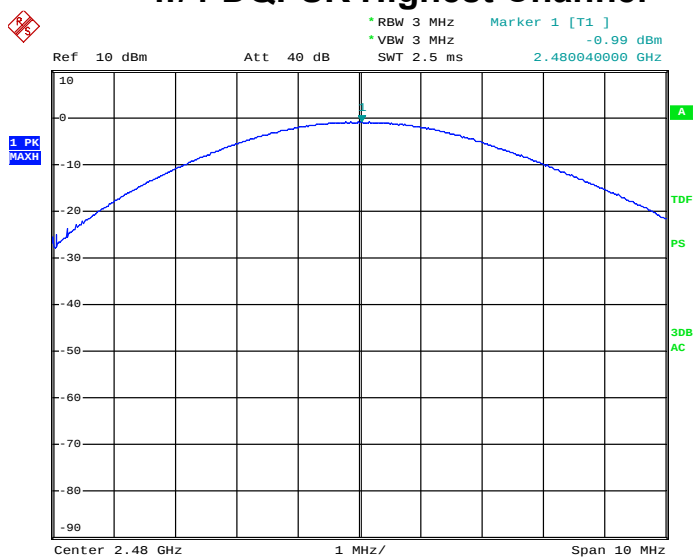


Date: 3.JUL.2013 20:22:05

8DPSK Lowest Channel

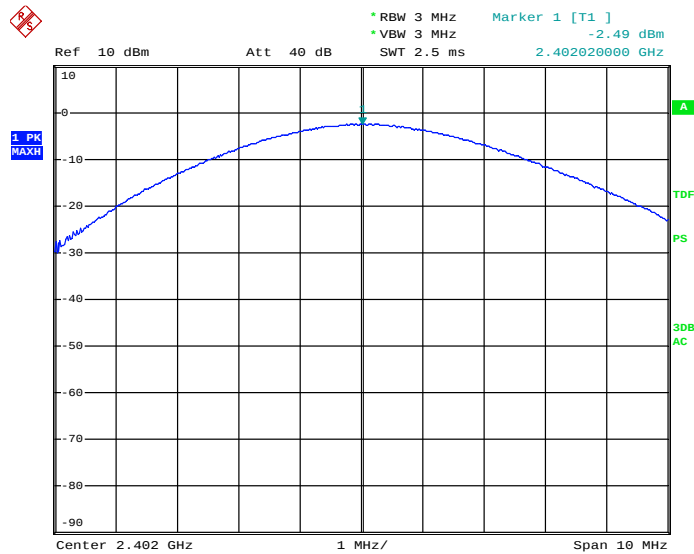


Date: 3.JUL.2013 20:22:18

8DPSK Middle Channel

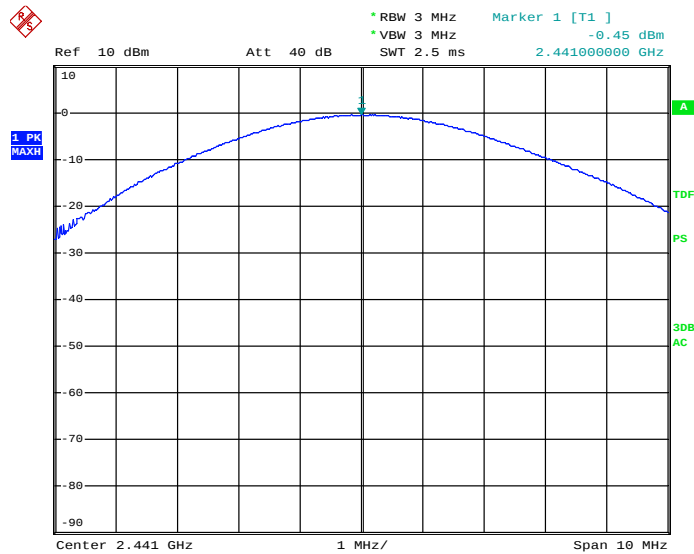

Date: 3.JUL.2013 20:22:37

8DPSK Highest Channel

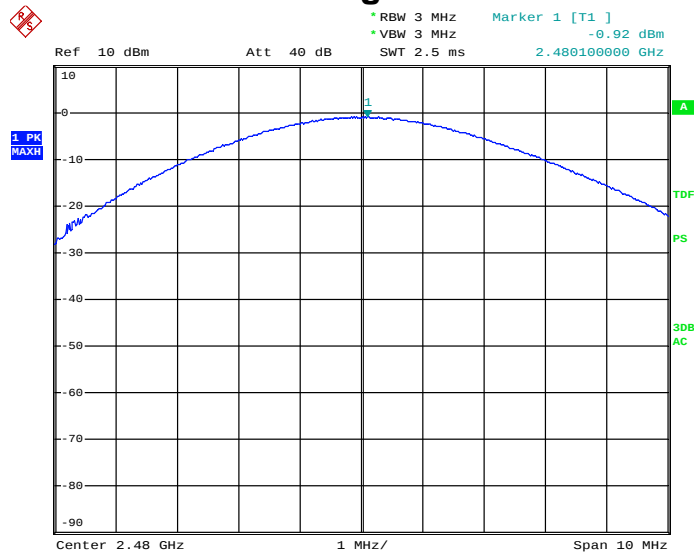

Date: 3.JUL.2013 20:22:50

10. Band Edge

10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

- (1) For RF Conducted: The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.
- (2) For Radiated Emission: Same as 4.2 Radiated Emission Measurement procedure.

10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.3 Measurement Results

Please see below test table and plots.
For Radiated Emission

GFSK:


Frequency (MHz)	Polarity	Level		Limited		Margin		Result
		PK	AV	PK	AV	PK	AV	
GFSK								
2395.320	H	46.45	28.82	74.00	54.00	-27.55	-25.18	PASS
2399.960	V	44.95	27.95	74.00	54.00	-29.05	-26.05	PASS
2483.920	H	36.72	25.93	74.00	54.00	-37.28	-28.07	PASS
2483.520	V	34.68	25.74	74.00	54.00	-39.32	-28.26	PASS

$\pi/4$ -DQPSK:


Frequency (MHz)	Polarity	Level		Limited		Margin		Result
		PK	AV	PK	AV	PK	AV	
GFSK								
2399.550	H	49.29	25.52	74.00	54.00	-24.71	-28.48	PASS
2399.560	V	47.88	23.30	74.00	54.00	-26.12	-30.70	PASS
2483.920	H	40.22	20.37	74.00	54.00	-33.78	-33.63	PASS
2483.520	V	41.30	23.19	74.00	54.00	-32.70	-30.81	PASS

For RF Conducted

GFSK Lowest Channel

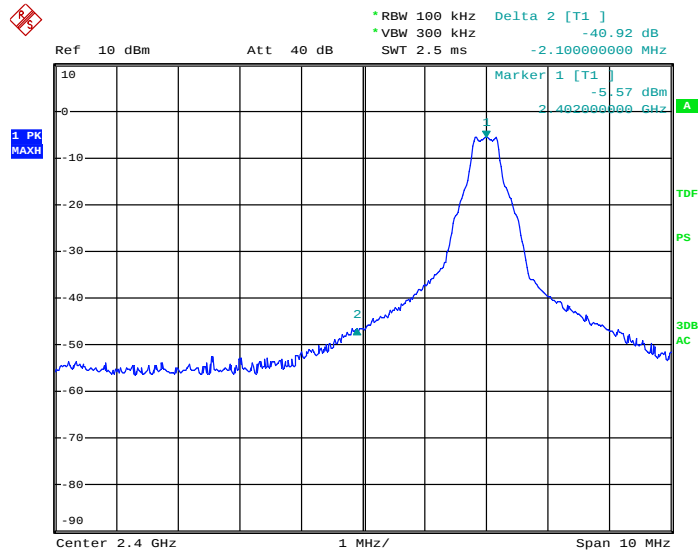


Date: 3.JUL.2013 20:27:35

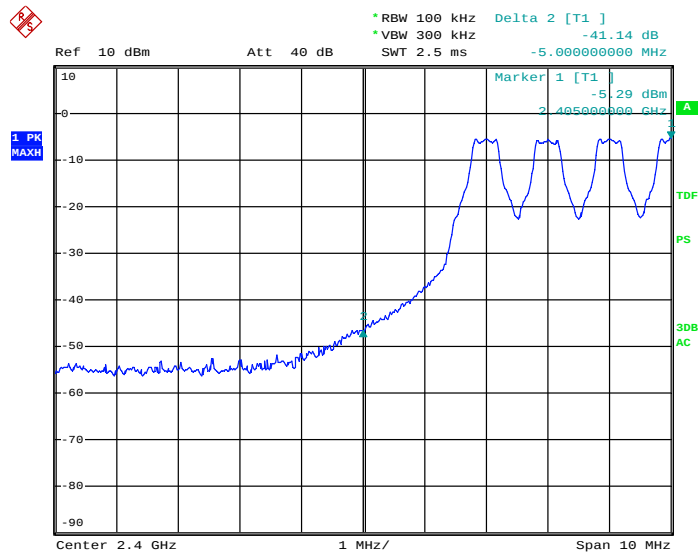


Date: 3.JUL.2013 20:28:55

GFSK Highest Channel

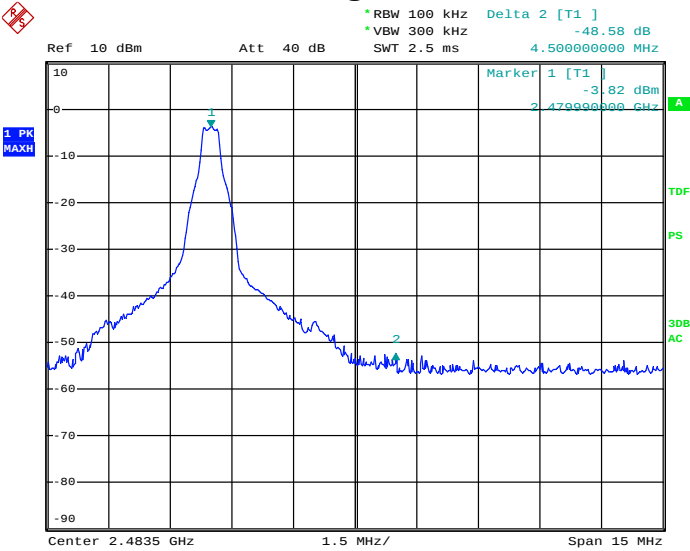


Date: 3.JUL.2013 20:51:31

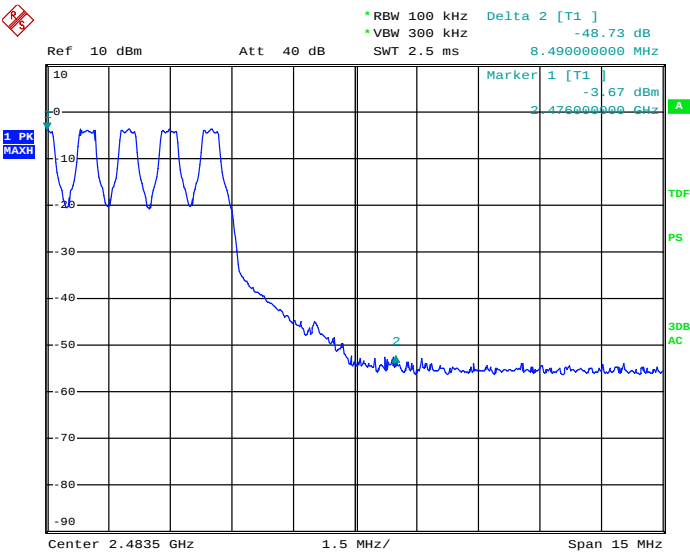


Date: 3.JUL.2013 20:53:13

$\pi/4$ -DQPSK Lowest Channel

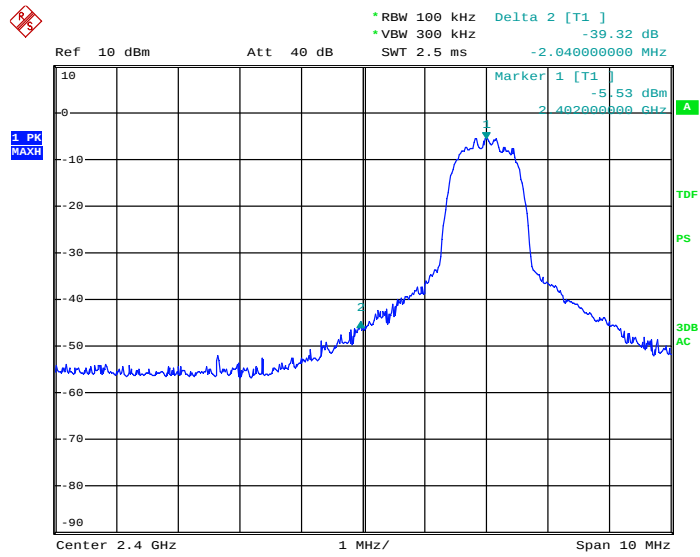


Date: 3.JUL.2013 20:44:29

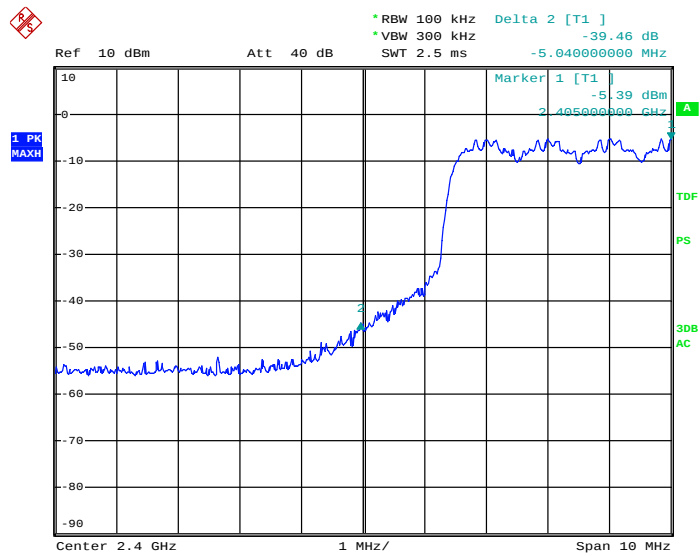


Date: 3.JUL.2013 20:46:49

$\pi/4$ -DQPSK Highest Channel

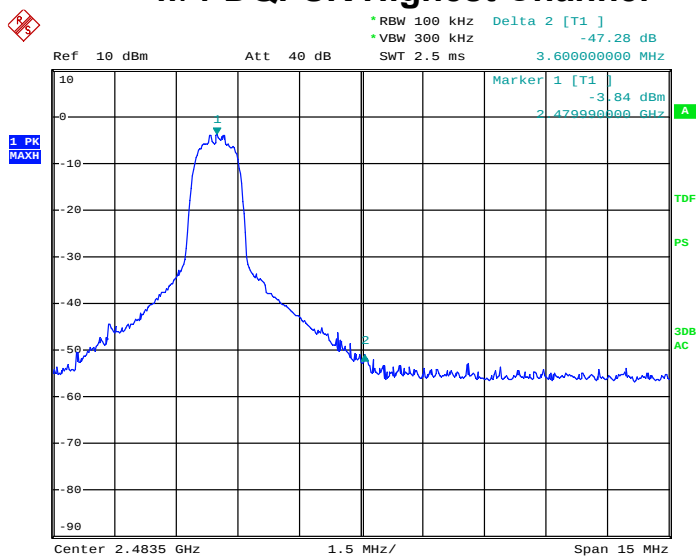


Date: 3.JUL.2013 20:54:42

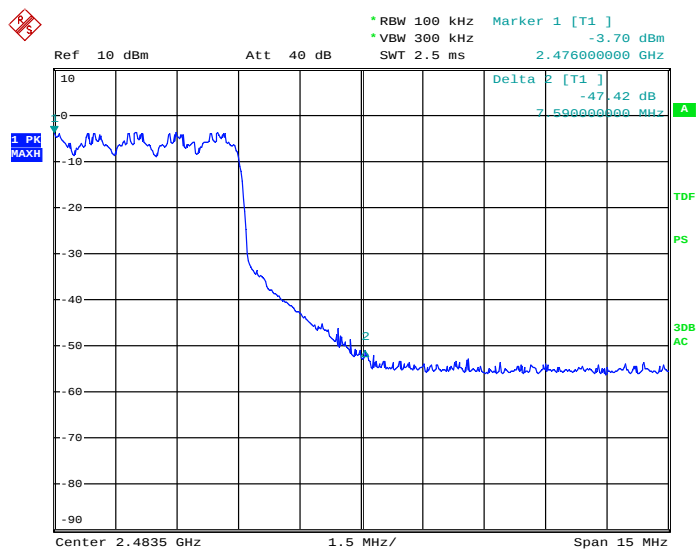


Date: 3.JUL.2013 20:56:45

8DPSK Lowest Channel

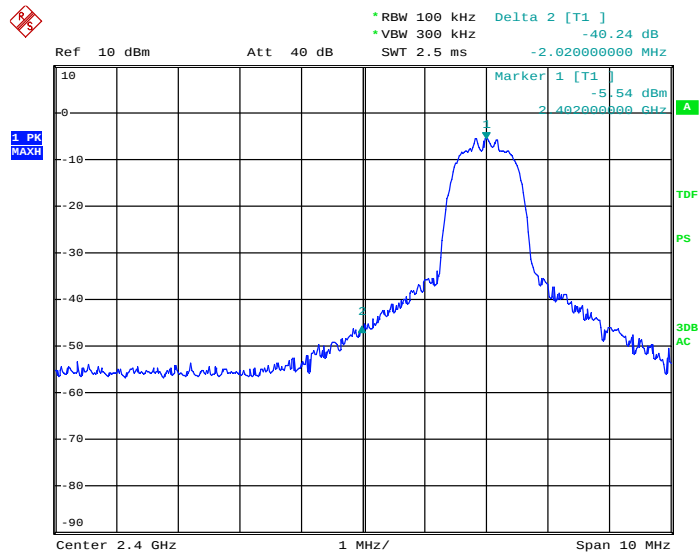


Date: 3.JUL.2013 20:47:57

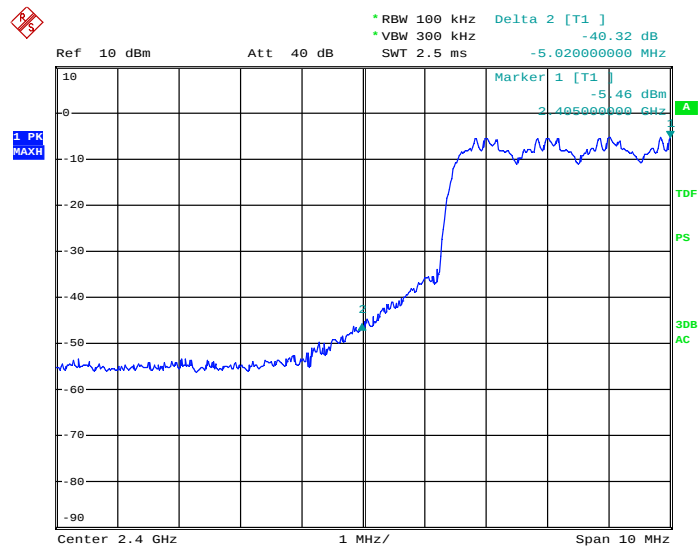


Date: 3.JUL.2013 20:50:23

8DPSK Highest Channel

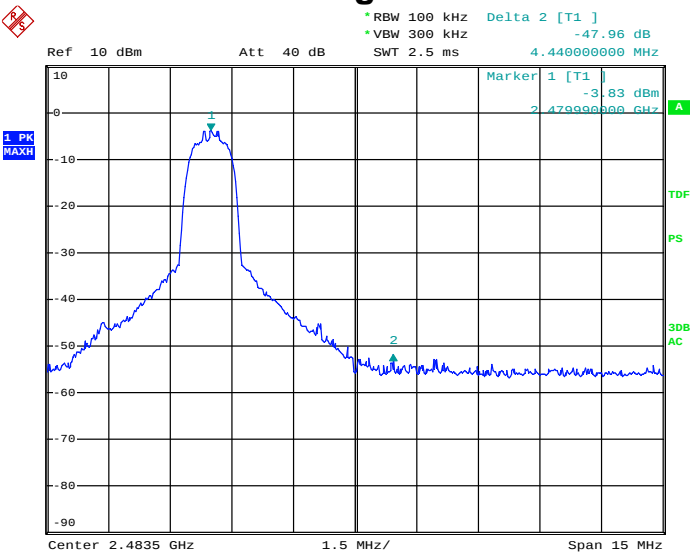

Date: 3.JUL.2013 20:58:07

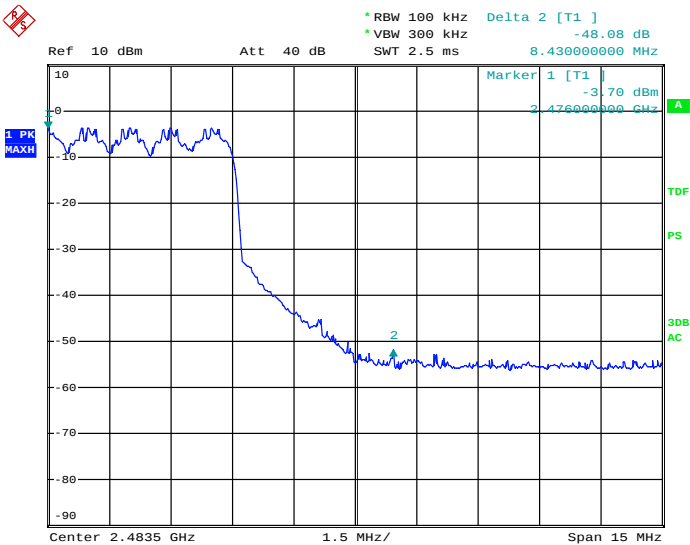

Date: 3.JUL.2013 21:00:03

11. Antenna Application

11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is +2dBi. So, the antenna is consider meet the requirement.

12. Conducted Spurious Emissions

12.1 Measurement Procedure

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

12.2 Measurement Results

Please refer to following plots, the worst case ($\pi/4$ -DQPSK) was shown.

* RBW 100 kHz
 * VBW 300 kHz
 SWT 100 ms

Marker 1 [T1]
 -52.70 dBm
 932.100000000 MHz

Ref 10 dBm Att 40 dB

1 PK MAXH

TDF
 PS
 3DB AC

Start 30 MHz 97 MHz/ Stop 1 GHz

Agilent 18:14:38 Jul 4, 2013 R T

Ref 11.5 dBm Atten 20 dB Mkr1 2.38 GHz -5.298 dBm

Peak Log 10 dB/Offst 1.5 dB DI -25.3 dBm

Display Line -25.30 dBm


V1 S2 S3 FC AA

Start 1 GHz Stop 25 GHz


#Res BW 100 kHz #VBW 300 kHz Sweep 2.486 s (401 pts)

Display Full Screen Display Line On Off Limits Active Fctn Position Center Title Preferences


$\pi/4$ -DQPSK Middle Channel

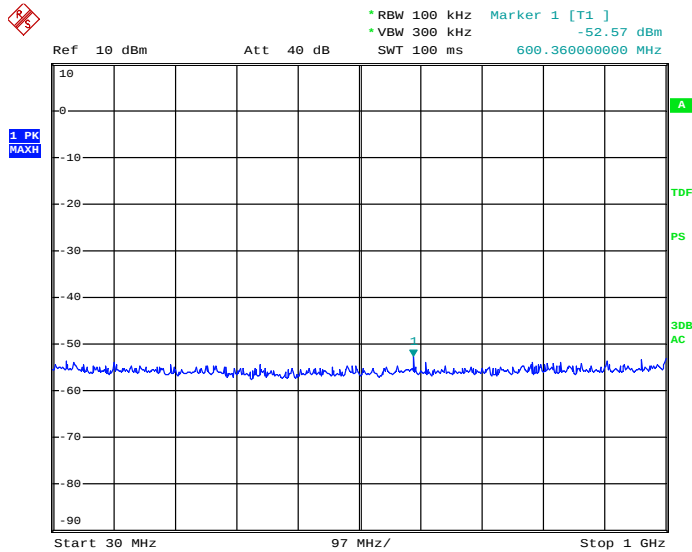


Date: 3.JUL.2013 21:00:57

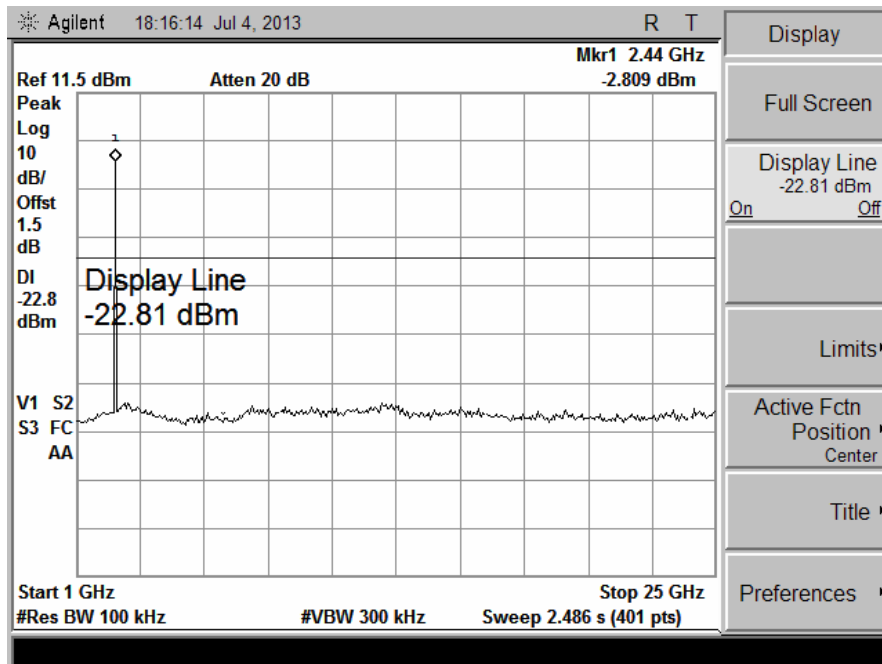

$\pi/4$ -DQPSK Highest Channel

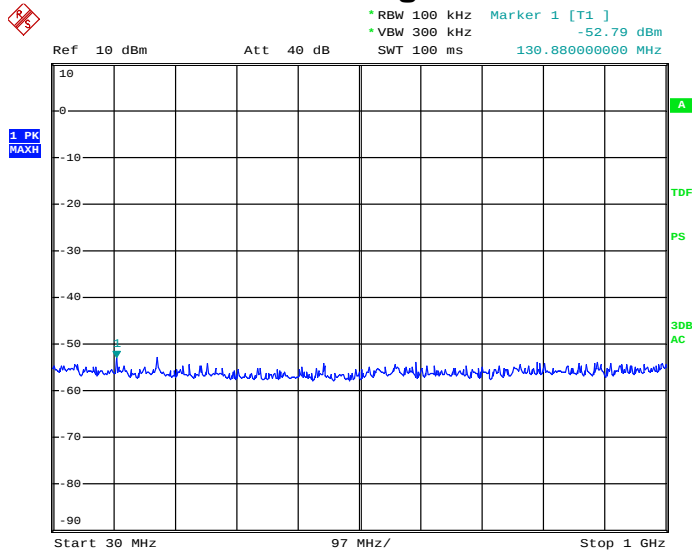

Date: 3.JUL.2013 21:01:08

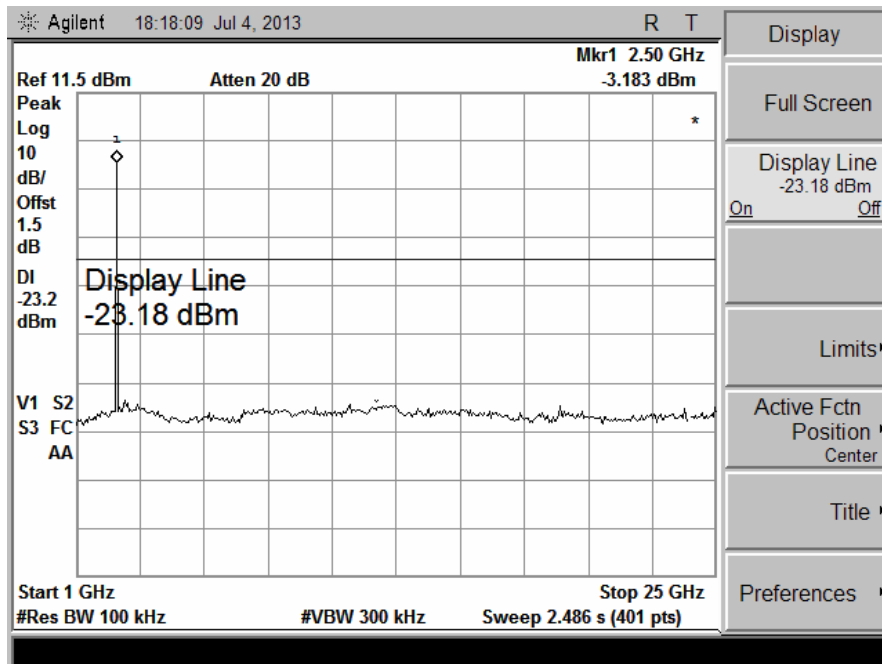

13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 25, 2012	Nov. 24, 2013
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2012	Nov. 27, 2013
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	Nov. 09, 2012	Nov. 08, 2013
Cable	Huber+Suhner	CIL02	N/A	Nov. 09, 2012	Nov. 08, 2013
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 09, 2012	Nov. 08, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct.24, 2012	Oct.23, 2013
Horn Antenna	EMCO	3117	00062558	Oct. 19, 2012	Oct. 18, 2013
Loop antenna	Daze	ZA30900A	0708	Oct.16, 2012	Oct.15, 2013
Spectrum Analyzer	Agilent	E4408B	MY414407D	Apr. 29, 2013	Apr. 28, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	Apr. 19, 2013	Apr. 18, 2014
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	Nov. 09, 2012	Nov. 08, 2013