

## TEST REPORT

**Report No.: 19101236HKG-001**

HeathCo LLC

Application For Certification  
(Original Grant)

**FCC ID: BJ4-4034**

**IC: 3984A-4034**

Transceiver

**Prepared and Checked by:**

**Approved by:**

Signed On File  
Wong Cheuk Ho, Herbert  
Lead Engineer

---

Wong Kwok Yeung, Kenneth  
Senior Lead Engineer  
Date: November 28, 2019

---

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

## TEST REPORT

### GENERAL INFORMATION

|                                  |   |
|----------------------------------|---|
| <b>Grantee:</b>                  | HeathCo LLC   |
| <b>Grantee Address:</b>          | 2445 Nashville Road,<br>Bowling Green,<br>KY, 42101   |
| <b>Contact Person:</b>           | Jeff Bessinger  |
| <b>Tel:</b>                      | (270)846-8271   |
| <b>Fax:</b>                      | N/A   |
| <b>e-mail:</b>                   | jbessinger@heathcollc.com   |
| <b>Manufacturer:</b>             | HeathCo LLC   |
| <b>Manufacturer Address:</b>     | 2445 Nashville Road,<br>Bowling Green,<br>KY, 42101   |
| <b>Brand Name:</b>               | Heath, HeathCo, Heath/Zenith, Style Selections, Secure 360,<br>Portfolio, Ace, Home Decorators, Utilitech, Hampton Bay, Notifi,<br>Secure Home, Defiant |
| <b>Description of EUT:</b>       | Linked Decorative Fixture   |
| <b>FCC ID:</b>                   | BJ4-4034  |
| <b>Model:</b>                    | XXXX-4034-07-YYYYY<br>Note: XXXXX, YYYYY refers to different packing and article number   |
| <b>IC:</b>                       | 3984A-4034  |
| <b>HVIN:</b>                     | 4034-07   |
| <b>PMN:</b>                      | 4034-07   |
| <b>Type of EUT:</b>              | Transceiver   |
| <b>Description of EUT:</b>       | Linked Decorative Fixture   |
| <b>Serial Number:</b>            | N/A   |
| <b>Date of Sample Submitted:</b> | October 30, 2019  |
| <b>Date of Test:</b>             | October 30, 2019 to November 25, 2019   |
| <b>Report No.:</b>               | 19101236HKG-001   |
| <b>Report Date:</b>              | November 28, 2019   |
| <b>Environmental Conditions:</b> | Temperature: +10 to 40°C<br>Humidity: 10 to 90%   |
| <b>Conclusion:</b>               | Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-210 Issue 9 Certification.       |

**TEST REPORT**

**SUMMARY OF TEST RESULT**

| Test Specification                                     | Reference                                     | Results |
|--|---|---------|
| Transmitter Power Line Conducted Emissions             | 15.207 /<br>RSS-Gen 8.8                       | Pass    |
| Radiated Emission<br>Radiated Emission on the Bandedge | 15.249, 15.209 /<br>RSS-210 B.10, RSS-210 4.4 | Pass    |
| Radiated Emission in Restricted Bands                  | 15.205 /<br>RSS-210 4.1                       | Pass    |

The equipment under test is found to be complying with the following standards:

- FCC Part 15, October 1, 2018 Edition
- RSS-210 Issue 9, August 2016
- RSS-Gen Issue 5 Amendment 1, March 2019

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the pervisions of this section.  
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

**TEST REPORT**

**TABLE OF CONTENTS**

**1.0 GENERAL DESCRIPTION ..... 5**

    1.1 Product Description .....5

    1.2 Related Submittal(s) Grants .....5

    1.3 Test Methodology.....5

    1.4 Test Facility .....5

**2.0 SYSTEM TEST CONFIGURATION..... 6**

    2.1 Justification.....6

    2.2 EUT Exercising Software.....6

    2.3 Special Accessories .....6

    2.4 Measurement Uncertainty.....6

    2.5 Support Equipment List and Description.....6

**3.0 EMISSION RESULTS..... 7**

    3.1 Field Strength Calculation .....7

    3.2 Radiated Emission Configuration Photograph.....8

    3.3 Radiated Emission Data .....8

    3.4 Conducted Emission Configuration Photograph .....8

    3.5 Conducted Emission Data .....8

**4.0 EQUIPMENT PHOTOGRAPHS ..... 14**

**5.0 PRODUCT LABELLING..... 14**

**6.0 TECHNICAL SPECIFICATIONS ..... 14**

**7.0 INSTRUCTION MANUAL..... 14**

**8.0 MISCELLANEOUS INFORMATION ..... 15**

    8.1 Radiated Emission on the Bandedge.....15

    8.2 Discussion of Pulse Desensitization.....15

    8.3 Calculation of Average Factor .....15

    8.4 Emissions Test Procedures.....16

    8.5 Occupied Bandwidth.....20

**9.0 CONFIDENTIALITY REQUEST ..... 21**

**10.0 EQUIPMENT LIST ..... 21**

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The equipment under test (EUT) is the Linked Decorative Fixture (wireless control lighting) which contains a transceiver operating in the 902MHz to 928MHz band. The EUT will transmit RF signal to the corresponding receivers when a person triggering the motion sensor. The EUT is powered by 120VAC.

The EUT operates in 3 channels (905.355MHz, 911.953MHz, 923.350MHz).

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042H.

## TEST REPORT

### 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 120VAC.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

#### 2.5 Support Equipment List and Description

N/A.

## TEST REPORT

### 3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB $\mu$ V/m

RR = RA - AG - AV in dB $\mu$ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V/m}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V/m}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$LF = 9.0 \text{ dB}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

## TEST REPORT

### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 923.344 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 2.2 dB

### 3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.587 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

### 3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 14.0 dB




**TEST REPORT**

**CONDUCTED EMISSION**

Model: 4034-07

Date of Test: November 25, 2019

Worst-Case Operating Mode: Transceiver Operating

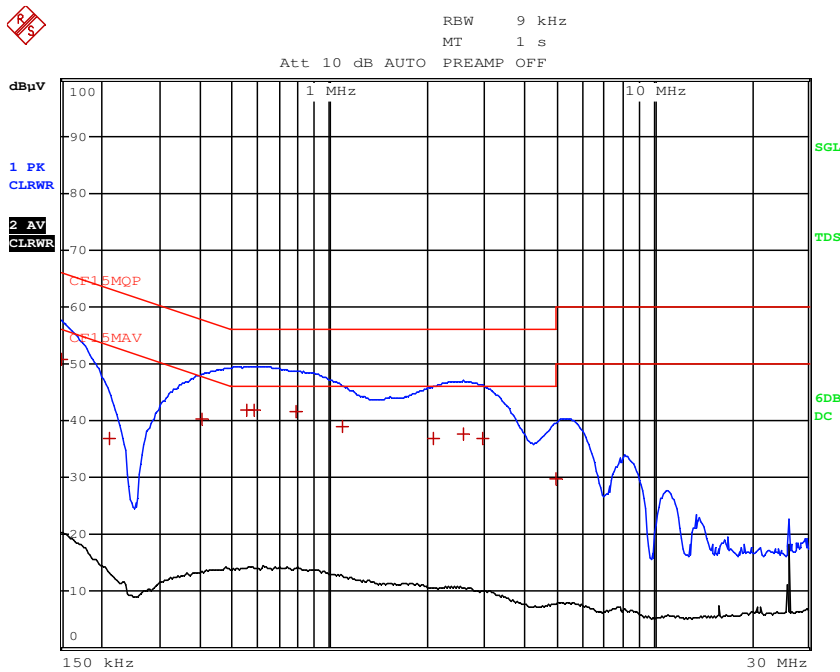

| EDIT PEAK LIST (Final Measurement Results) |                       |            |       |          |
|--|-----------------------|------------|-------|----------|
| TRACE                                      | FREQUENCY             | LEVEL dBμV | DELTA | LIMIT dB |
| Trace1:                                    | CF15MQP               |            |       |          |
| Trace2:                                    | CF15MAV               |            |       |          |
| Trace3:                                    | ---                   |            |       |          |
| 1  | Quasi Peak 150 kHz    | 50.77 L1   |       | -15.22   |
| 1  | Quasi Peak 213 kHz    | 36.93 L1   |       | -26.14   |
| 1  | Quasi Peak 402 kHz    | 40.36 L1   |       | -17.45   |
| 1  | Quasi Peak 555 kHz    | 41.89 L1   |       | -14.10   |
| 1  | Quasi Peak 586.5 kHz  | 41.95 L1   |       | -14.04   |
| 1  | Quasi Peak 789 kHz    | 41.70 L1   |       | -14.29   |
| 1  | Quasi Peak 1.0995 MHz | 38.96 L1   |       | -17.03   |
| 1  | Quasi Peak 2.103 MHz  | 36.74 N    |       | -19.25   |
| 1  | Quasi Peak 2.598 MHz  | 37.60 N    |       | -18.40   |
| 1  | Quasi Peak 2.958 MHz  | 36.84 L1   |       | -19.15   |
| 1  | Quasi Peak 4.9965 MHz | 29.89 N    |       | -26.10   |

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

**TEST REPORT**

**RADIATED EMISSIONS**

Model: 4034-07

Date of Test: November 25, 2019

Worst-Case Operating Mode: Transmitting (Lowest channel)

Table 1  
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Quasi-Peak (dBµV/m) | Quasi-Peak Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------------|---------------------------------|-------------|
| V            | 902.000         | 32.0           | 16                | 32.0                | 48.0                            | 54.0                            | -6.0        |
| V            | 905.350         | 72.6           | 16                | 32.0                | 88.6                            | 94.0                            | -5.4        |
| V            | 928.000         | 29.0           | 16                | 33.0                | 46.0                            | 54.0                            | -8.0        |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| V            | 1810.700        | 68.1           | 33                | 27.2                | 50.4                         | 54.0                         | -3.6         |
| V            | <b>2716.050</b> | <b>40.8</b>    | <b>33</b>         | <b>30.4</b>         | <b>40.4</b>                  | <b>54.0</b>                  | <b>-13.6</b> |
| V            | <b>3621.400</b> | <b>34.9</b>    | <b>33</b>         | <b>33.3</b>         | <b>44.2</b>                  | <b>54.0</b>                  | <b>-9.8</b>  |
| V            | <b>4526.750</b> | <b>36.4</b>    | <b>33</b>         | <b>34.9</b>         | <b>45.6</b>                  | <b>54.0</b>                  | <b>-8.4</b>  |
| V            | <b>5432.100</b> | <b>37.4</b>    | <b>33</b>         | <b>35.7</b>         | <b>42.2</b>                  | <b>54.0</b>                  | <b>-11.8</b> |
| V            | 6337.450        | 36.4           | 33                | 36.9                | 44.6                         | 54.0                         | -9.4         |
| V            | 7242.800        | 36.6           | 33                | 37.9                | 38.2                         | 54.0                         | -15.8        |
| V            | <b>8148.150</b> | <b>37.2</b>    | <b>33</b>         | <b>39.0</b>         | <b>40.2</b>                  | <b>54.0</b>                  | <b>-13.8</b> |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V            | 1810.700        | 76.8           | 33                | 27.2                | 71.0                      | 74.0                      | -3.0         |
| V            | <b>2716.050</b> | <b>60.6</b>    | <b>33</b>         | <b>30.4</b>         | <b>58.0</b>               | <b>74.0</b>               | <b>-16.0</b> |
| V            | <b>3621.400</b> | <b>67.5</b>    | <b>33</b>         | <b>33.3</b>         | <b>67.8</b>               | <b>74.0</b>               | <b>-6.2</b>  |
| V            | <b>4526.750</b> | <b>56.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>58.2</b>               | <b>74.0</b>               | <b>-15.8</b> |
| V            | <b>5432.100</b> | <b>56.7</b>    | <b>33</b>         | <b>35.7</b>         | <b>59.4</b>               | <b>74.0</b>               | <b>-14.6</b> |
| V            | 6337.450        | 56.9           | 33                | 36.9                | 60.8                      | 74.0                      | -13.2        |
| V            | 7242.800        | 46.9           | 33                | 37.9                | 51.8                      | 74.0                      | -22.2        |
| V            | <b>8148.150</b> | <b>37.8</b>    | <b>33</b>         | <b>39.0</b>         | <b>43.8</b>               | <b>74.0</b>               | <b>-30.2</b> |

- NOTES:
1. Peak Detector Data unless otherwise stated. Average measurement is according to C63.10 (2013).
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
  6. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

**TEST REPORT**

Model: 4034-07

Date of Test: November 25, 2019

Worst-Case Operating Mode: Transmitting (Middle channel)

**Table 2  
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Quasi-Peak (dBµV/m) | Quasi-Peak Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------------|---------------------------------|-------------|
| V            | 902.000         | 28.0           | 16                | 32.0                | 44.0                            | 54.0                            | -10.0       |
| V            | 911.948         | 74.0           | 16                | 33.0                | 91.0                            | 94.0                            | -3.0        |
| V            | 928.000         | 29.0           | 16                | 33.0                | 46.0                            | 54.0                            | -8.0        |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| V            | 1823.896        | 68.1           | 33                | 27.2                | 51.6                         | 54.0                         | -2.4         |
| <b>V</b>     | <b>2735.844</b> | <b>40.8</b>    | <b>33</b>         | <b>30.4</b>         | <b>40.6</b>                  | <b>54.0</b>                  | <b>-13.4</b> |
| <b>V</b>     | <b>3647.792</b> | <b>34.9</b>    | <b>33</b>         | <b>33.3</b>         | <b>42.4</b>                  | <b>54.0</b>                  | <b>-11.6</b> |
| <b>V</b>     | <b>4559.740</b> | <b>36.4</b>    | <b>33</b>         | <b>34.9</b>         | <b>44.8</b>                  | <b>54.0</b>                  | <b>-9.2</b>  |
| V            | 5471.688        | 37.4           | 33                | 35.7                | 42.8                         | 54.0                         | -11.2        |
| V            | 6383.636        | 36.4           | 33                | 36.9                | 44.8                         | 54.0                         | -9.2         |
| <b>V</b>     | <b>7295.584</b> | <b>36.6</b>    | <b>33</b>         | <b>37.9</b>         | <b>38.6</b>                  | <b>54.0</b>                  | <b>-15.4</b> |
| <b>V</b>     | <b>8207.532</b> | <b>37.2</b>    | <b>33</b>         | <b>39.0</b>         | <b>44.2</b>                  | <b>54.0</b>                  | <b>-9.8</b>  |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V            | 1823.896        | 77.3           | 33                | 27.2                | 71.5                      | 74.0                      | -2.5         |
| <b>V</b>     | <b>2735.844</b> | <b>60.8</b>    | <b>33</b>         | <b>30.4</b>         | <b>58.2</b>               | <b>74.0</b>               | <b>-15.8</b> |
| <b>V</b>     | <b>3647.792</b> | <b>66.5</b>    | <b>33</b>         | <b>33.3</b>         | <b>66.8</b>               | <b>74.0</b>               | <b>-7.2</b>  |
| <b>V</b>     | <b>4559.740</b> | <b>54.7</b>    | <b>33</b>         | <b>34.9</b>         | <b>56.6</b>               | <b>74.0</b>               | <b>-17.4</b> |
| V            | 5471.688        | 57.1           | 33                | 35.7                | 59.8                      | 74.0                      | -14.2        |
| V            | 6383.636        | 56.3           | 33                | 36.9                | 60.2                      | 74.0                      | -13.8        |
| <b>V</b>     | <b>7295.584</b> | <b>47.9</b>    | <b>33</b>         | <b>37.9</b>         | <b>52.8</b>               | <b>74.0</b>               | <b>-21.2</b> |
| <b>V</b>     | <b>8207.532</b> | <b>42.8</b>    | <b>33</b>         | <b>39.0</b>         | <b>48.8</b>               | <b>74.0</b>               | <b>-25.2</b> |

- NOTES:
1. Peak Detector Data unless otherwise stated. Average measurement is according to C63.10 (2013).
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
  6. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

**TEST REPORT**

Model: 4034-07

Date of Test: November 25, 2019

Worst-Case Operating Mode: Transmitting (Highest channel))

**Table 3  
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Quasi-Peak (dBμV/m) | Quasi-Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------------|---------------------------------|-------------|
| V            | 902.000         | 28.2           | 16                | 32.0                | 44.2                            | 54.0                            | -9.8        |
| V            | 923.344         | 74.8           | 16                | 33.0                | 91.8                            | 94.0                            | -2.2        |
| V            | 928.000         | 34.0           | 16                | 33.0                | 51.0                            | 54.0                            | -3.0        |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| V            | 1846.688        | 68.1           | 33                | 27.2                | 50.6                         | 54.0                         | -3.4         |
| V            | <b>2770.032</b> | <b>40.8</b>    | <b>33</b>         | <b>30.4</b>         | <b>41.6</b>                  | <b>54.0</b>                  | <b>-12.4</b> |
| V            | <b>3693.376</b> | <b>34.9</b>    | <b>33</b>         | <b>33.3</b>         | <b>40.4</b>                  | <b>54.0</b>                  | <b>-13.6</b> |
| V            | <b>4616.720</b> | <b>36.4</b>    | <b>33</b>         | <b>34.9</b>         | <b>50.8</b>                  | <b>54.0</b>                  | <b>-3.2</b>  |
| V            | 5540.064        | 37.4           | 33                | 36.6                | 41.8                         | 54.0                         | -12.2        |
| V            | 6463.408        | 36.4           | 33                | 36.9                | 46.8                         | 54.0                         | -7.2         |
| V            | <b>7386.752</b> | <b>36.6</b>    | <b>33</b>         | <b>37.9</b>         | <b>37.6</b>                  | <b>54.0</b>                  | <b>-16.4</b> |
| V            | <b>8310.096</b> | <b>37.2</b>    | <b>33</b>         | <b>39.0</b>         | <b>43.2</b>                  | <b>54.0</b>                  | <b>-10.8</b> |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V            | 1846.688        | 76.3           | 33                | 27.2                | 70.5                      | 74.0                      | -3.5         |
| V            | <b>2770.032</b> | <b>58.8</b>    | <b>33</b>         | <b>30.4</b>         | <b>56.2</b>               | <b>74.0</b>               | <b>-17.8</b> |
| V            | <b>3693.376</b> | <b>60.5</b>    | <b>33</b>         | <b>33.3</b>         | <b>60.8</b>               | <b>74.0</b>               | <b>-13.2</b> |
| V            | <b>4616.720</b> | <b>56.9</b>    | <b>33</b>         | <b>34.9</b>         | <b>58.8</b>               | <b>74.0</b>               | <b>-15.2</b> |
| V            | 5540.064        | 53.2           | 33                | 36.6                | 56.8                      | 74.0                      | -17.2        |
| V            | 6463.408        | 52.3           | 33                | 36.9                | 56.2                      | 74.0                      | -17.8        |
| V            | <b>7386.752</b> | <b>47.7</b>    | <b>33</b>         | <b>37.9</b>         | <b>52.6</b>               | <b>74.0</b>               | <b>-21.4</b> |
| V            | <b>8310.096</b> | <b>42.2</b>    | <b>33</b>         | <b>39.0</b>         | <b>48.2</b>               | <b>74.0</b>               | <b>-25.8</b> |

- NOTES:
1. Peak Detector Data unless otherwise stated. Average measurement is according to C63.10 (2013).
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
  6. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

**TEST REPORT**

Model: 4034-07

Date of Test: November 25, 2019

Worst-Case Operating Mode: Transceiver Operating

Table 4  
**Pursuant to FCC Part 15 Section 15.209 / RSS-210 4.4 Requirement**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|-------------|
| H            | 92.248          | 38.5           | 16           | 11.0                | 33.5               | 43.5                 | -10.0       |
| H            | 104.982         | 37.8           | 16           | 13.0                | 34.8               | 43.5                 | -8.7        |
| <b>V</b>     | <b>114.005</b>  | <b>38.8</b>    | <b>16</b>    | <b>14.0</b>         | <b>36.8</b>        | <b>43.5</b>          | <b>-6.7</b> |
| V            | 155.786         | 38.8           | 16           | 16.0                | 38.8               | 43.5                 | -4.7        |
| V            | 209.974         | 39.5           | 16           | 17.0                | 40.5               | 43.5                 | -3.0        |
| <b>V</b>     | <b>259.998</b>  | <b>33.2</b>    | <b>16</b>    | <b>21.0</b>         | <b>38.2</b>        | <b>46.0</b>          | <b>-7.8</b> |
| V            | 300.022         | 36.0           | 16           | 22.0                | 42.0               | 46.0                 | -4.0        |

- NOTES:
1. Quasi-Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
  6. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

## TEST REPORT

### 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

## TEST REPORT

### 8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

#### 8.1 Radiated Emission on the Bandedge

The bandedge data is shown in frequency table 1,2,3.

#### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

#### 8.3 Calculation of Average Factor

N/A.

## TEST REPORT

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.



## TEST REPORT

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


## TEST REPORT

### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

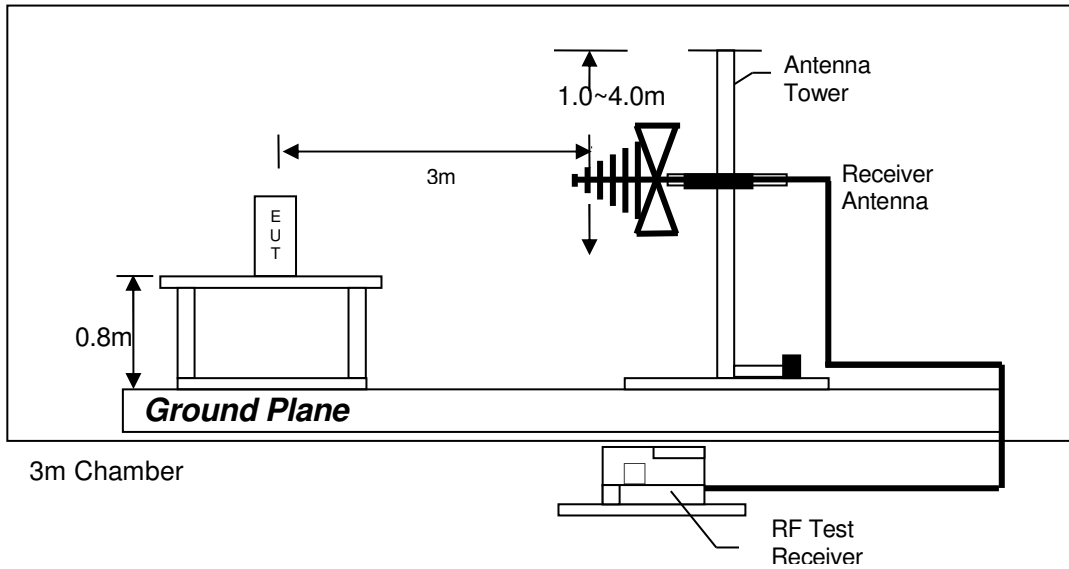

Test setup of radiated emissions up to 1GHz

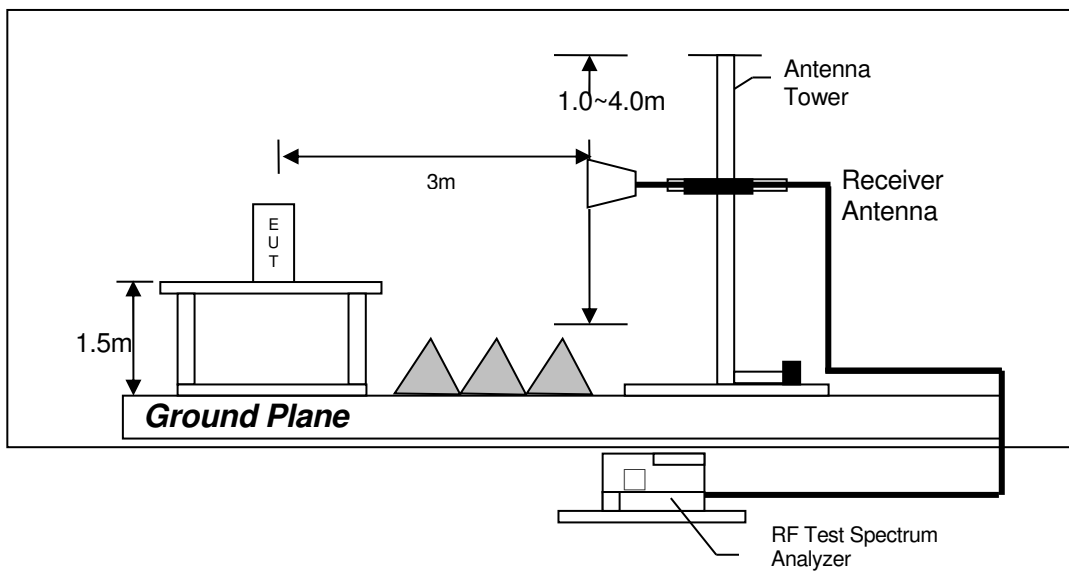

Test setup of radiated emissions above 1GHz


## TEST REPORT

### 8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 8.4.3 Conducted Emission Test Setup

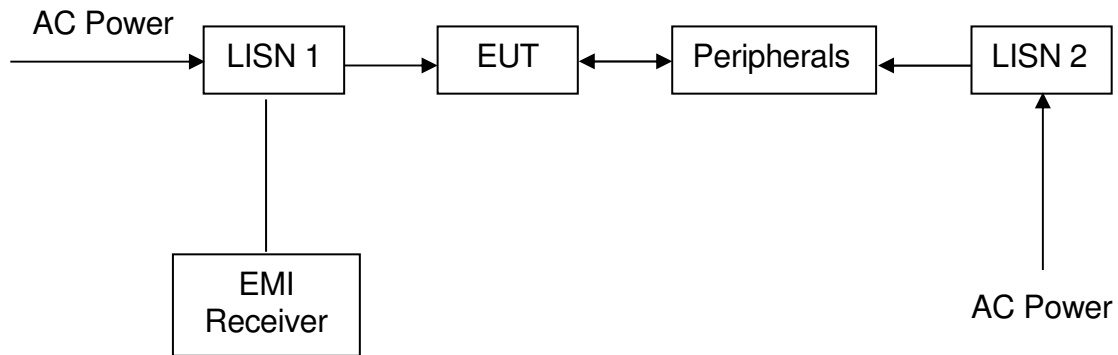


**TEST REPORT**

8.5 Occupied Bandwidth

Occupied Bandwidth Results:

| Frequency (MHz) | Occupied Bandwidth (kHz) |
|-----------------|--------------------------|
| 905.355         | 16.1                     |
| 911.953         | 16.6                     |
| 923.350         | 16.7                     |

The worst case is shown as below

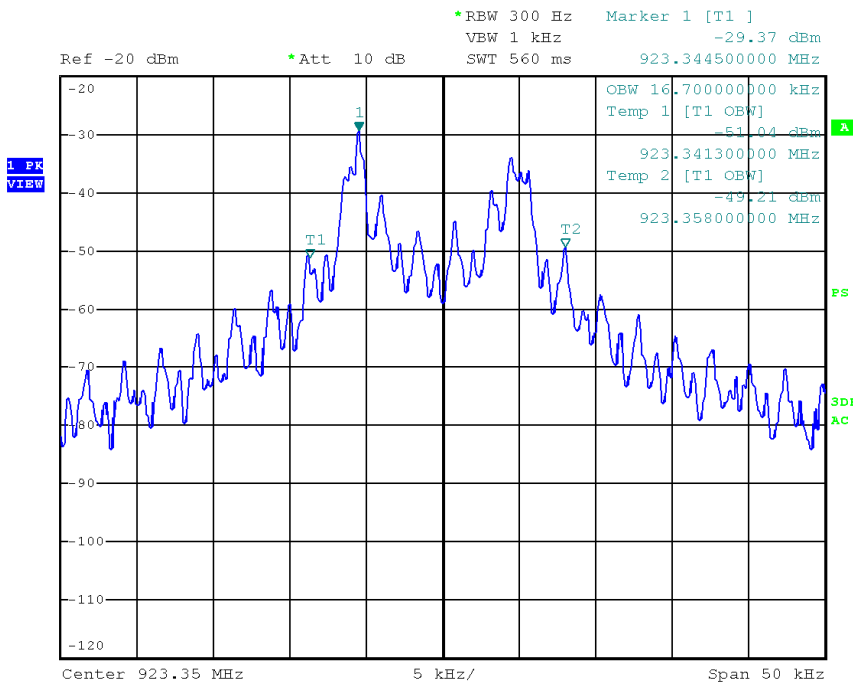

**TEST REPORT**

**9.0 CONFIDENTIALITY REQUEST**

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

**10.0 EQUIPMENT LIST**

1) Radiated Emissions Test

| Equipment            | EMI Test Receiver | Spectrum Analyzer | Biconical Antenna |
|----------------------|-------------------|-------------------|-------------------|
| Registration No.     | EW-3156           | EW-2466           | EW-0571           |
| Manufacturer         | R&S               | ROHDESCHWARZ      | EMCO              |
| Model No.            | ESR26             | FSP30             | 3104C             |
| Calibration Date     | August 01, 2019   | January 06, 2019  | July 23, 2019     |
| Calibration Due Date | August 01, 2020   | January 06, 2020  | July 23, 2021     |

| Equipment            | Log Periodic Antenna | Double Ridged Guide Antenna | 14m Double Shield RF Cable (20MHz - 6GHz) |
|----------------------|----------------------|-----------------------------|---|
| Registration No.     | EW-0447              | EW-1133                     | EW-2074                                   |
| Manufacturer         | EMCO                 | EMCO                        | RADIALL                                   |
| Model No.            | 3146                 | 3115                        | Nm-RG142-                                 |
| Calibration Date     | September 25, 2019   | November 29, 2018           | March 31, 2019                            |
| Calibration Due Date | March 25, 2021       | May 29, 2020                | March 31, 2020                            |

| Equipment            | 15m 40GHz indoor RF Cable      | RF Pre-amplifier (9kHz to 6000MHz) | Solid State Low Noise Pre-amplifier Assembly (1 - 18)GHz |
|----------------------|--------------------------------|------------------------------------|--|
| Registration No.     | EW-3032                        | EW-3424                            | EW-3229  |
| Manufacturer         | GREATBILLION                   | SCHWARZBECK                        | BONN ELEKTRO   |
| Model No.            | SMA(m) St-SMA (m) St, 15m long | BBV9744                            | BLMA 0118-5G   |
| Calibration Date     | May 14, 2019                   | July 23, 2019                      | June 28, 2019  |
| Calibration Due Date | May 14, 2020                   | July 23, 2020                      | June 28, 2020  |

| Equipment            | Pyramidal Horn Antenna | Active Loop H-field (9kHz to 30MHz) |
|----------------------|------------------------|-------------------------------------|
| Registration No.     | EW-0905                | EW-3326                             |
| Manufacturer         | EMCO                   | EMCO                                |
| Model No.            | 3160-09                | 6502                                |
| Calibration Date     | July 23, 2019          | March 21, 2019                      |
| Calibration Due Date | January 23, 2021       | September 21, 2020                  |

**TEST REPORT**

2) Conducted Emissions Test

| <b>Equipment</b>     | <b>Artificial Mains Network</b> | <b>RF Cable 80cm (RG142) (9kHz to 30MHz)</b> | <b>EMI Test Receiver</b> |
|----------------------|---------------------------------|--|--------------------------|
| Registration No.     | EW-2501                         | EW-2453                                      | EW-2500                  |
| Manufacturer         | ROHDESCHWARZ                    | RADIALL                                      | ROHDESCHWARZ             |
| Model No.            | ENV-216                         | RF Cable 120cm (RG142) (9kHz to 30MHz)       | ESCI                     |
| Calibration Date     | May 10, 2019                    | December 24, 2018                            | November 28, 2018        |
| Calibration Due Date | May 10, 2020                    | December 24, 2019                            | November 28, 2019        |

3) Bandwidth Measurement

| <b>Equipment</b>     | <b>40GHz 5m RF Cable</b> | <b>Spectrum Analyzer</b> |
|----------------------|--------------------------|--------------------------|
| Registration No.     | EW-2701                  | EW-2466                  |
| Manufacturer         | GREATBILLION             | ROHDESCHWARZ             |
| Model No.            | sma m-m 5m 40G           | FSP30                    |
| Calibration Date     | May 14, 2019             | January 06, 2019         |
| Calibration Due Date | May 14, 2020             | January 06, 2020         |

**END OF TEST REPORT**