



FCC RADIO TEST REPORT

Applicant : Toshiba Tec Corporation

Address : Gate City Ohsaki West Tower, 1-11-1, Osaki,
Shinagawa-ku, Tokyo 141-8562, Japan

Equipment : Wireless LAN with Bluetooth module

Model No. : GN-4030

Trade Name : TOSHIBA

FCC ID. : BJI-GN4030

I HEREBY CERTIFY THAT :

The sample was received on Apr. 08, 2019 and the testing was completed on May. 30, 2019 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	12
4.1 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data.....	15
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	18
6.1 Test Limit	18
6.2 Test Procedures	18
6.3 Typical Test Setup	19
6.4 Test Result and Data (9KHz ~ 30MHz)	20
6.5 Test Result and Data (30MHz ~ 1GHz).....	20
6.6 Test Result and Data (1GHz ~ 25GHz).....	22
6.7 Restricted Bands of Operation.....	46
6.8 Test Photographs (30MHz ~ 1GHz)	47
6.9 Test Photographs (1GHz ~ 25GHz)	48
7. Test of Conducted Spurious Emission	49
7.1 Test Limit	49
7.2 Test Procedure	49
7.3 Test Setup Layout	49
7.4 Test Result and Data.....	49
8. On Time, Duty Cycle and Measurement methods	66
8.1 Test Limit	66
8.2 Test Procedure	66
8.3 Test Setup Layout	66
8.4 Test Result and Data.....	66
9. 6dB Bandwidth Measurement Data.....	68
9.1 Test Limit	68
9.2 Test Procedures	68
9.3 Test Setup Layout	68



9.4	Test Result and Data	68
10.	Maximum Peak and Average Output Power	73
10.1	Test Limit	73
10.2	Test Procedures	73
10.3	Test Setup Layout	73
10.4	Test Result and Data	73
11.	Power Spectral Density	75
11.1	Test Limit	75
11.2	Test Procedures	75
11.3	Test Setup Layout	75
11.4	Test Result and Data	75
12.	Radio Frequency Exposure	80
12.1	Applicable Standards	80
12.2	EUT Specification	80
12.3	Test Results	81
12.4	Calculation	81
12.5	Maximum Permissible Exposure	82



History of this test report



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

KDB558074

KDB662911

KDB447498

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The principle of judgment is made according to the laboratory's reporting control and measurement uncertainty standard procedures.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD1904033).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz 5470-5725MHz, 5725-5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	PCB Antenna
Antenna Gain	2400-2483.5MHz: 2.3dBi For BT/BLE For WLAN: 2400-2483.5MHz: ANT A:1.73dBi, ANT B:2.38dBi 5150-5250MHz: ANT A:1.34dBi, ANT B:2.10dBi 5250-5350MHz: ANT A:1.34dBi, ANT B:2.10dBi 5470-5725MHz: ANT A:1.55dBi, ANT B:2.00dBi 5725-5850MHz: ANT A:2.00dBi, ANT B:1.21dBi

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Remote workstation and EUT for RF test. The Remote workstation included Notebook.
- c. An executive program, " RTL11ac_8822BU: v6.00_20180227" under WIN 10 was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 3" generated the worst case, it was reported as the final data.

Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 3" generated the worst case, they were reported as the final data.

Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1~4" generated the worst case, they were reported as the final data.

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061,TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Tested Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2019/05/30	21°C / 63%	Nick Guan
Radiated Emissions	3M02-NK	2019/05/18	22°C / 54%	Spree Yeh
RF Conduction	CON01-NK	2019/05/28	22°C / 43%	Spree Yeh



2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±3.405dB
Radiated Spurious Emission(30MHz~1GHz)	±5.326dB
Radiated Spurious Emission(1GHz~25GHz)	±5.918dB
Conducted Spurious Emission	±2.156dB
6dB Bandwidth	±4.401%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.41%
Peak Output Power(Conducted Power Meter)	±1.31dB
Dwell Time	±0.11%
Power Spectral Density	±2.146dB
Duty Cycle	±0.17%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Anrenna	EMCO	3116	31974	2018/09/07	2019/09/06
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2018/06/11	2019/06/10
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2018/07/03	2019/07/02
Preamplifier	EM Electronics corp.	EM330	60660	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2018/09/12	2019/09/11
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2019/04/09	2020/04/08
Cable-3m(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2019/04/09	2020/04/08
Cable-8m(1G-40G)	Rapidtek	40GHZ 800CM	38MS-38MS800314	2019/04/10	2020/04/09
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2018/07/03	2019/07/02
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Power Sensor	Anritsu	MA2411B	1207295	2019/04/11	2020/04/10

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2018/9/12	2019/09/11
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-740	2018/6/13	2019/06/12
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2018/9/4	2019/09/03
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	PCB Antenna
Antenna Gain	2400-2483.5MHz: ANT A:1.73dBi,ANT B:2.38dBi 5150-5250MHz: ANT A:1.34dBi, ANT B:2.10dBi 5250-5350MHz: ANT A:1.34dBi, ANT B:2.10dBi 5470-5725MHz: ANT A:1.55dBi, ANT B:2.00dBi 5725-5850MHz: ANT A:2.00dBi, ANT B:1.21dBi

2400-2483.5MHz

For Power directional gain= $G_{ant} = 2.38 \text{ dBi}$

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 5.07 \text{ (dBi)}$$

5150MHz-5250MHz

For Power directional gain= $G_{ant} = 2.1 \text{ dBi}$

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 4.74 \text{ (dBi)}$$

5250MHz-5350MHz

For Power directional gain= $G_{ant} = 2.1 \text{ dBi}$

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 4.74 \text{ (dBi)}$$

5470MHz-5725MHz

For Power directional gain= $G_{ant} = 2.0 \text{ dBi}$

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 4.79 \text{ (dBi)}$$

5725MHz -5850MHz

For Power directional gain= $G_{ant} = 2.0 \text{ dBi}$

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 4.62 \text{ (dBi)}$$



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

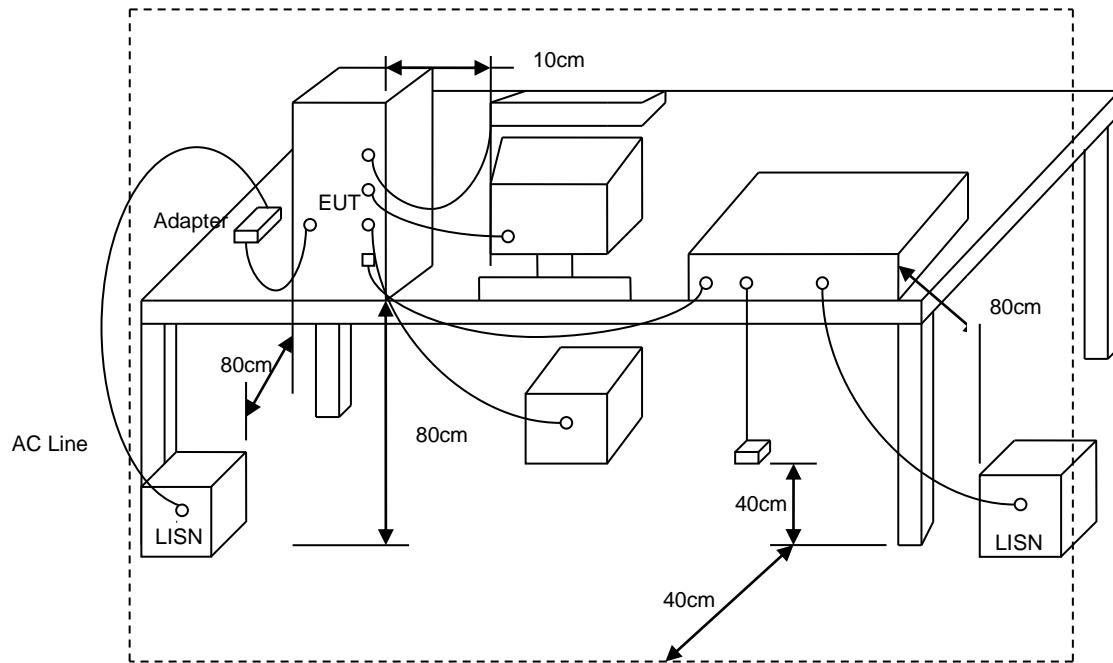



5.4 Test Result and Data

Power :	DC 5V from system	Pol/Phase :	LINE
Test Mode :	Mode 3	:	

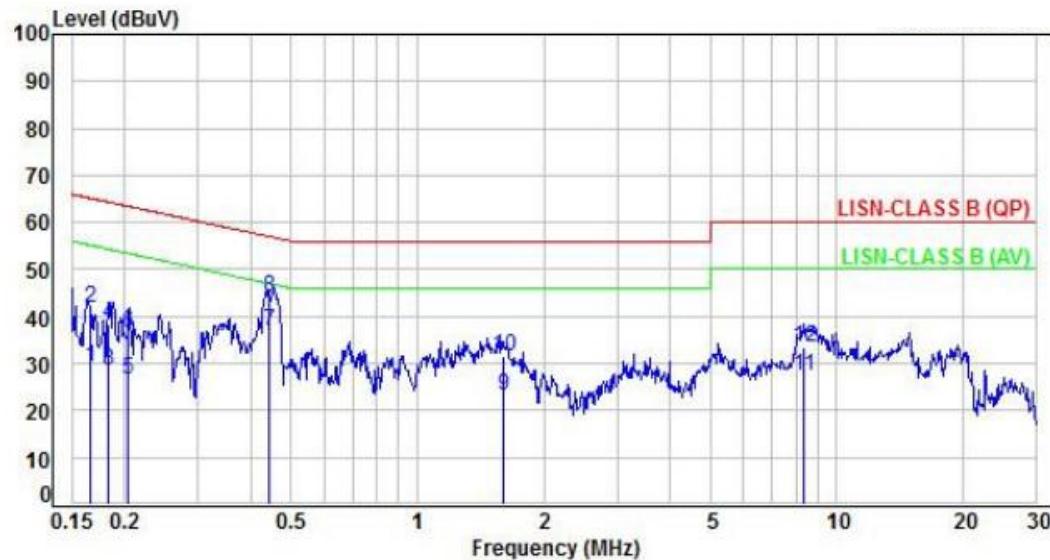

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.92	19.37	29.29	55.18	-25.89	Average	P
2	0.17	9.92	31.97	41.89	65.18	-23.29	QP	P
3	0.18	9.92	18.72	28.64	54.32	-25.68	Average	P
4	0.18	9.92	28.63	38.55	64.32	-25.77	QP	P
5	0.20	9.92	16.71	26.63	53.49	-26.86	Average	P
6	0.20	9.92	26.72	36.64	63.49	-26.85	QP	P
7	0.44	9.94	26.85	36.79	46.98	-10.19	Average	P
8	0.44	9.94	34.20	44.14	56.98	-12.84	QP	P
9	1.60	9.99	13.36	23.35	46.00	-22.65	Average	P
10	1.60	9.99	21.42	31.41	56.00	-24.59	QP	P
11	8.33	10.23	17.16	27.39	50.00	-22.61	Average	P
12	8.33	10.23	23.39	33.62	60.00	-26.38	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	DC 5V from system	Pol/Phase :	NEUTRAL
Test Mode :	Mode 3	:	

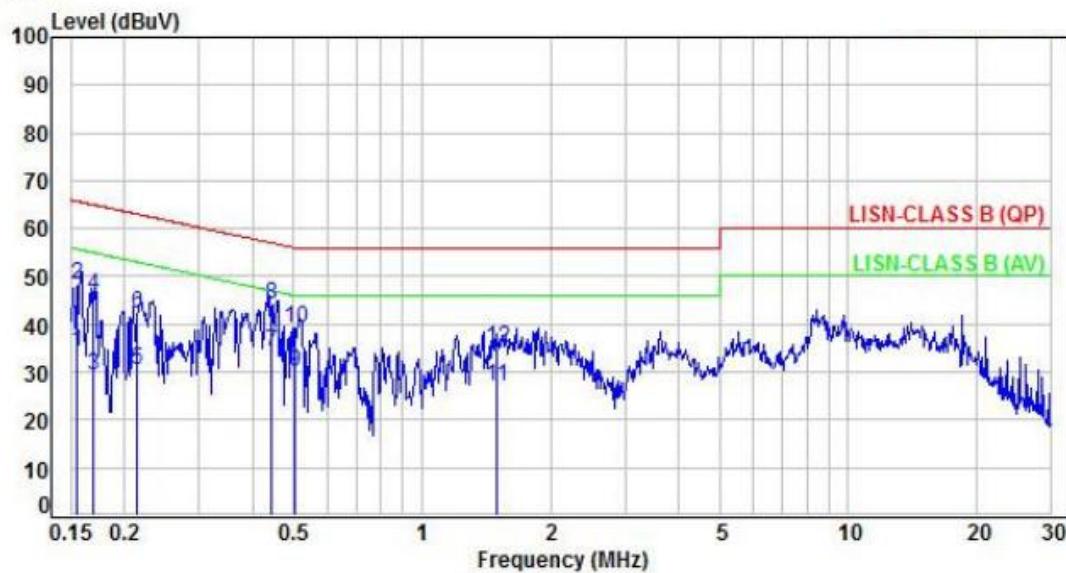

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.95	24.38	34.33	55.74	-21.41	Average	P
2	0.15	9.95	38.18	48.13	65.74	-17.61	QP	P
3	0.17	9.95	19.40	29.35	55.02	-25.67	Average	P
4	0.17	9.95	36.13	46.08	65.02	-18.94	QP	P
5	0.22	9.95	20.33	30.28	53.01	-22.73	Average	P
6	0.22	9.95	32.28	42.23	63.01	-20.78	QP	P
7	0.44	9.96	24.20	34.16	46.98	-12.82	Average	P
8	0.44	9.96	34.12	44.08	56.98	-12.90	QP	P
9	0.50	9.96	19.89	29.85	46.00	-16.15	Average	P
10	0.50	9.96	29.23	39.19	56.00	-16.81	QP	P
11	1.49	10.00	17.09	27.09	46.00	-18.91	Average	P
12	1.49	10.00	24.92	34.92	56.00	-21.08	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

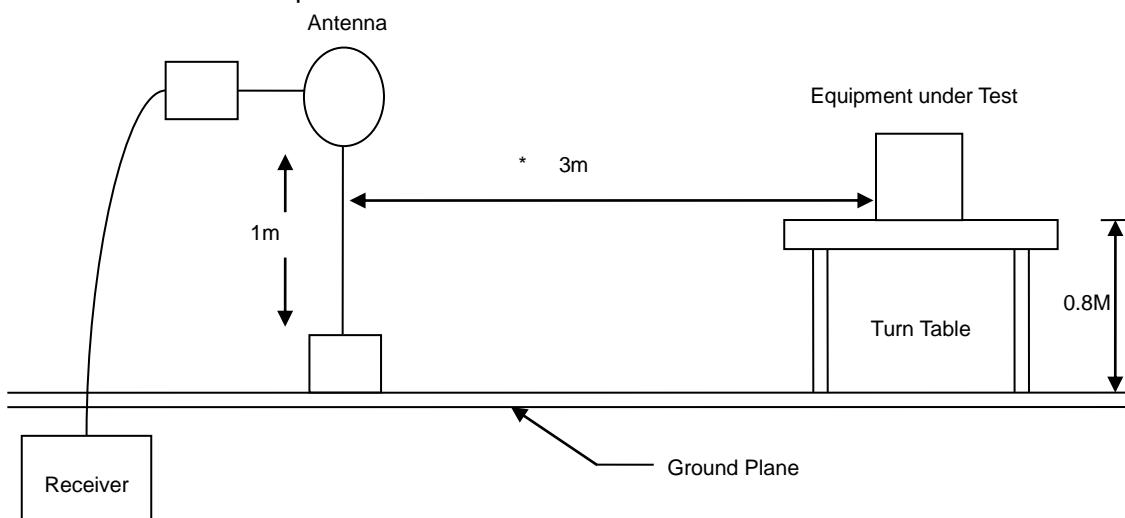

30MHz- 1GHz Test Setup

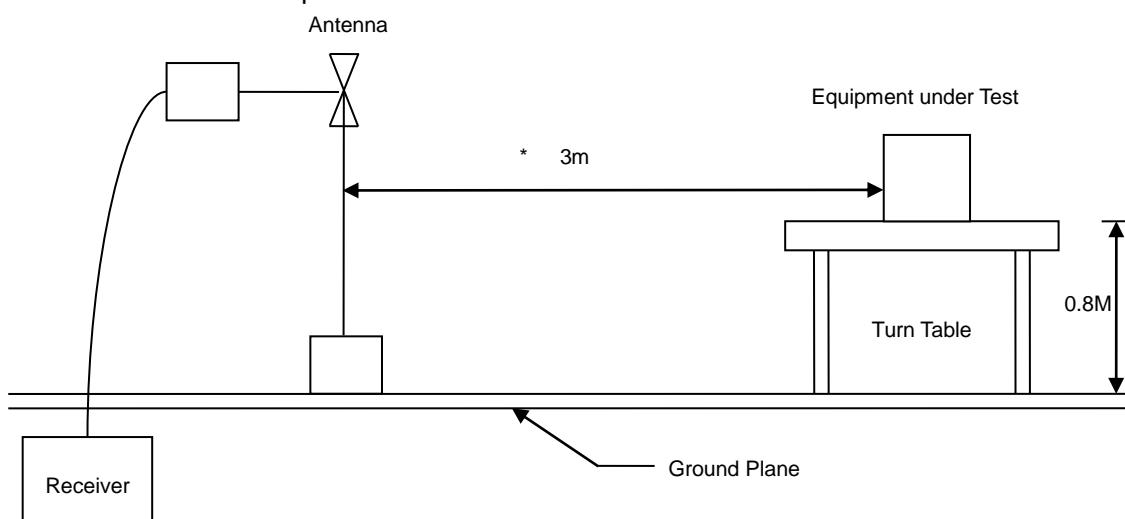

Above 1GHz Test Setup

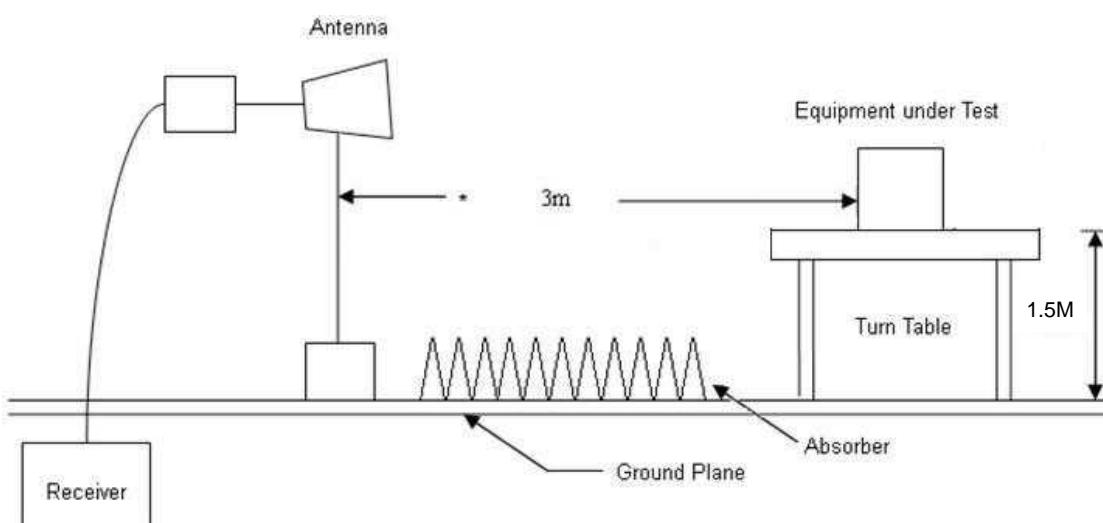




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 3	:	

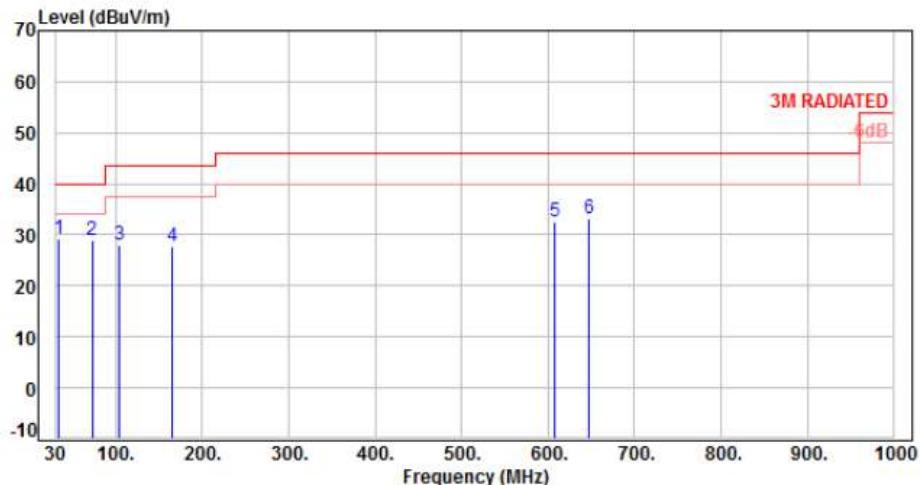


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	34.85	-10.45	39.77	29.32	40.00	-10.68	Peak	400	0	P
2	72.68	-12.08	40.90	28.82	40.00	-11.18	Peak	400	0	P
3	104.69	-13.64	41.67	28.03	43.50	-15.47	Peak	400	0	P
4	164.83	-9.40	37.19	27.79	43.50	-15.71	Peak	400	0	P
5	607.15	-1.46	33.91	32.45	46.00	-13.55	Peak	400	0	P
6	647.89	-1.13	34.27	33.14	46.00	-12.86	Peak	400	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3	:	

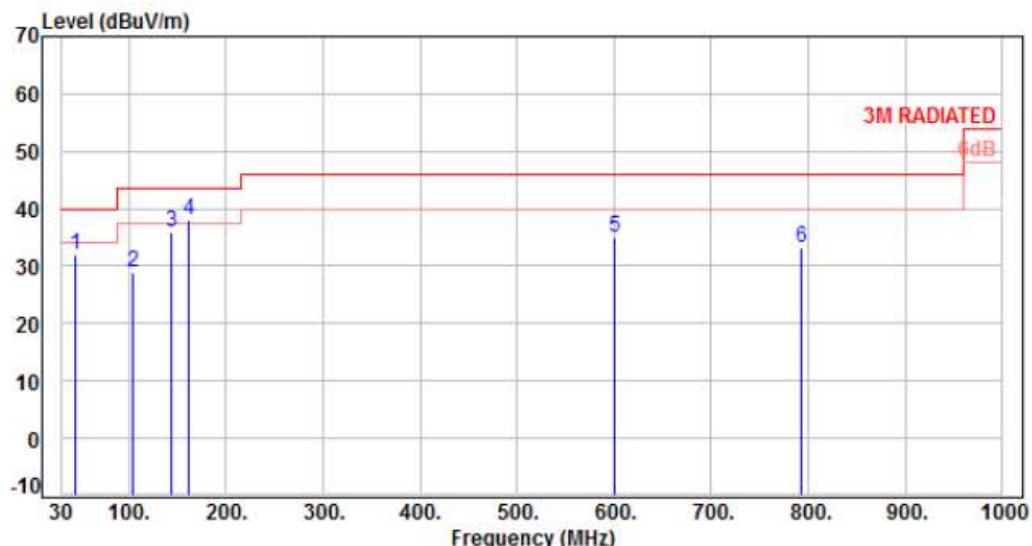

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	45.52	-9.40	41.33	31.93	40.00	-8.07	Peak	100	0	P
2	104.69	-13.64	42.55	28.91	43.50	-14.59	Peak	100	0	P
3	144.46	-9.71	45.68	35.97	43.50	-7.53	Peak	100	0	P
4	161.92	-9.33	47.43	38.10	43.50	-5.40	Peak	100	0	P
5	600.36	-1.66	36.59	34.93	46.00	-11.07	Peak	100	0	P
6	792.42	1.25	32.03	33.28	46.00	-12.72	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH01	:	

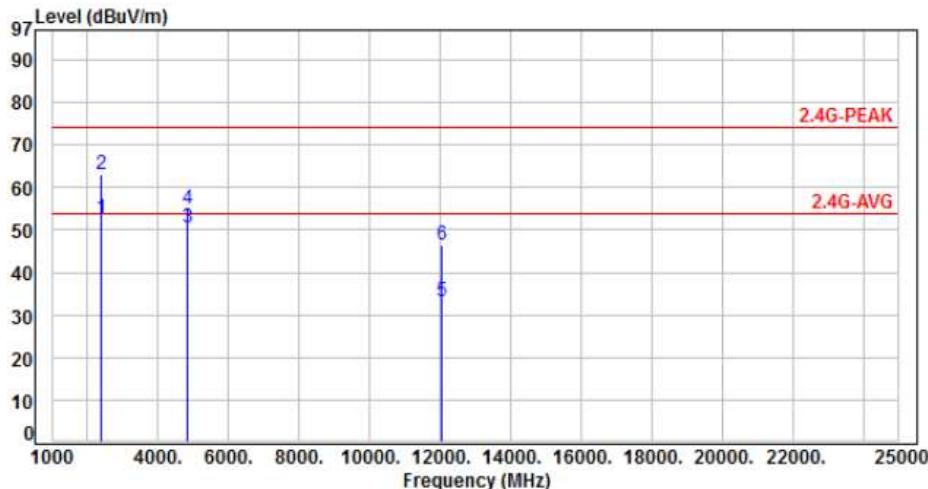

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.00	-14.60	67.40	52.80	54.00	-1.20	Average	100	33	P
2	2387.00	-14.60	77.50	62.90	74.00	-11.10	Peak	100	33	P
3	4824.00	-6.82	57.40	50.58	54.00	-3.42	Average	100	285	P
4	4824.00	-6.82	61.70	54.88	74.00	-19.12	Peak	100	285	P
5	12060.00	4.61	28.50	33.11	54.00	-20.89	Average	100	216	P
6	12060.00	4.61	41.70	46.31	74.00	-27.69	Peak	100	216	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH01	:	

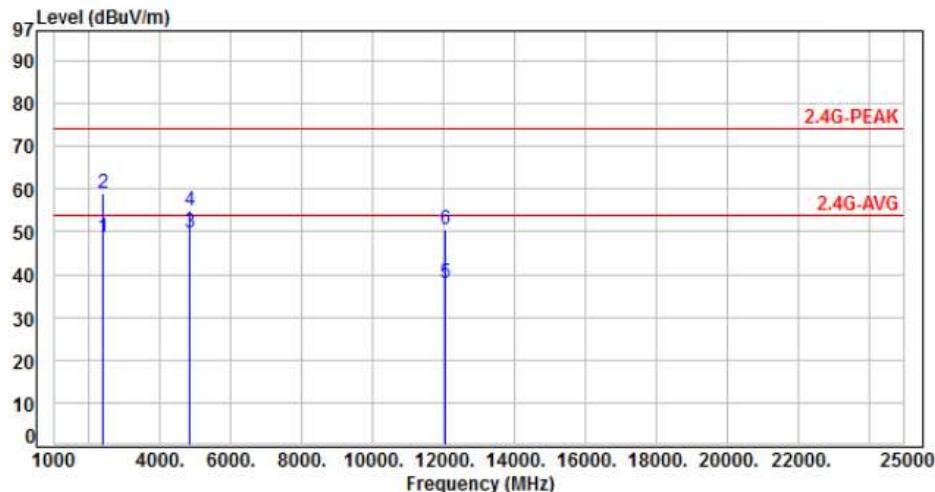

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.00	-14.60	63.30	48.70	54.00	-5.30	Average	103	200	P
2	2387.00	-14.60	73.60	59.00	74.00	-15.00	Peak	103	200	P
3	4824.00	-6.82	56.60	49.78	54.00	-4.22	Average	100	210	P
4	4824.00	-6.82	61.70	54.88	74.00	-19.12	Peak	100	210	P
5	12060.00	4.61	33.50	38.11	54.00	-15.89	Average	100	260	P
6	12060.00	4.61	45.90	50.51	74.00	-23.49	Peak	100	260	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH06	:	

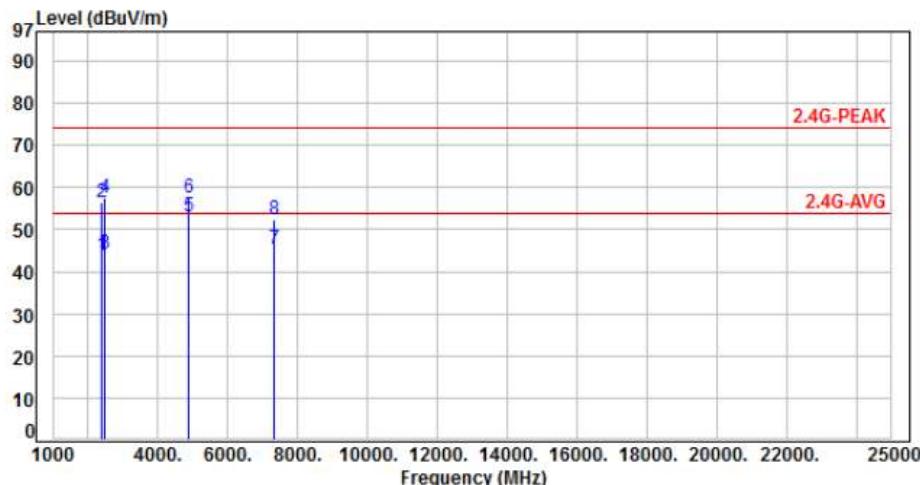

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	58.60	43.99	54.00	-10.01	Average	100	358	P
2	2390.00	-14.61	71.21	56.60	74.00	-17.40	Peak	100	358	P
3	2483.50	-14.22	58.52	44.30	54.00	-9.70	Average	100	358	P
4	2483.50	-14.22	71.60	57.38	74.00	-16.62	Peak	100	358	P
5	4874.00	-6.63	59.61	52.98	54.00	-1.02	Average	100	270	P
6	4874.00	-6.63	64.20	57.57	74.00	-16.43	Peak	100	270	P
7	7311.00	-1.28	46.70	45.42	54.00	-8.58	Average	104	181	P
8	7311.00	-1.28	53.80	52.52	74.00	-21.48	Peak	104	181	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH06	:	

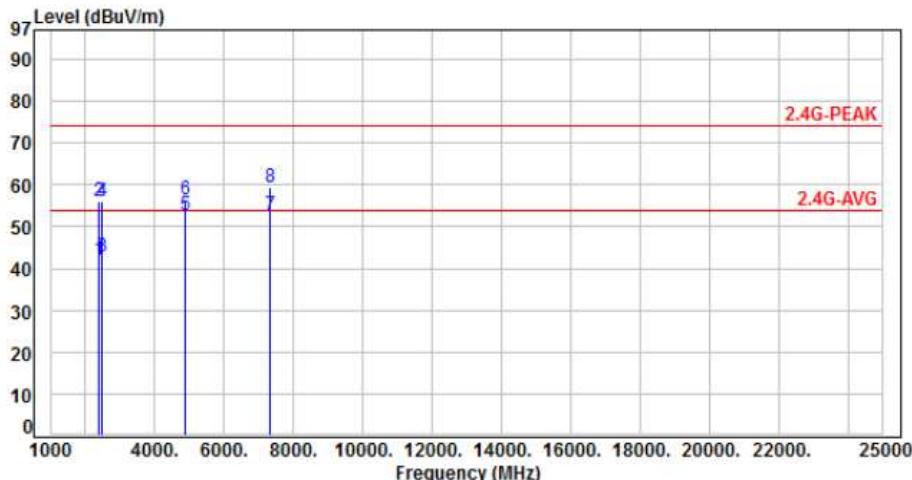

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	56.78	42.17	54.00	-11.83	Average	105	212	P
2	2390.00	-14.61	70.51	55.90	74.00	-18.10	Peak	105	212	P
3	2483.50	-14.22	56.82	42.60	54.00	-11.40	Average	105	212	P
4	2483.50	-14.22	70.44	56.22	74.00	-17.78	Peak	105	212	P
5	4874.00	-6.63	59.47	52.84	54.00	-1.16	Average	100	211	P
6	4874.00	-6.63	62.90	56.27	74.00	-17.73	Peak	100	211	P
7	7311.00	-1.28	54.20	52.92	54.00	-1.08	Average	100	350	P
8	7311.00	-1.28	60.60	59.32	74.00	-14.68	Peak	100	350	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH11	:	

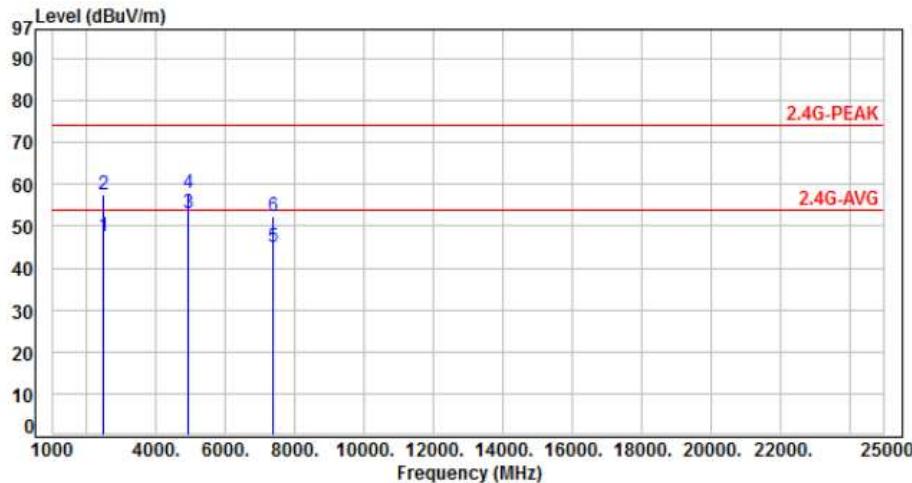


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2487.00	-14.21	61.69	47.48	54.00	-6.52	Average	100	35	P
2	2487.00	-14.21	71.80	57.59	74.00	-16.41	Peak	100	35	P
3	4924.00	-6.50	59.50	53.00	54.00	-1.00	Average	108	275	P
4	4924.00	-6.50	64.40	57.90	74.00	-16.10	Peak	108	275	P
5	7386.00	-1.19	46.21	45.02	54.00	-8.98	Average	100	166	P
6	7386.00	-1.19	53.41	52.22	74.00	-21.78	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH11	:	

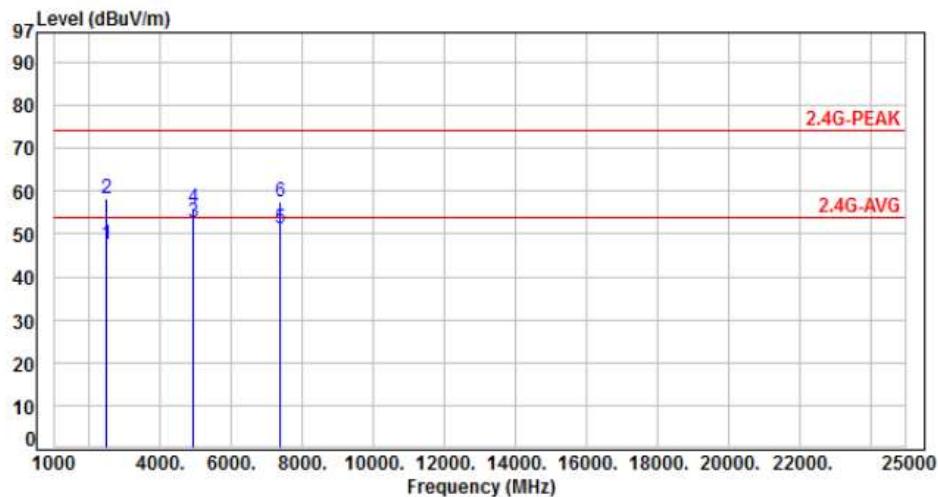

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2487.00	-14.21	61.70	47.49	54.00	-6.51	Average	100	210	P
2	2487.00	-14.21	72.50	58.29	74.00	-15.71	Peak	100	210	P
3	4924.00	-6.50	59.30	52.80	54.00	-1.20	Average	100	214	P
4	4924.00	-6.50	62.60	56.10	74.00	-17.90	Peak	100	214	P
5	7386.00	-1.19	52.41	51.22	54.00	-2.78	Average	100	351	P
6	7386.00	-1.19	58.71	57.52	74.00	-16.48	Peak	100	351	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH01	:	

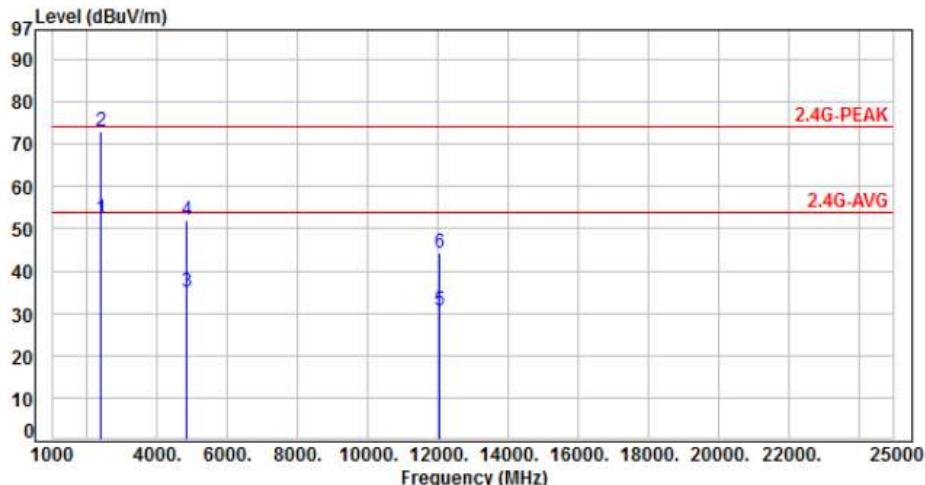

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	66.80	52.19	54.00	-1.81	Average	100	270	P
2	2390.00	-14.61	87.50	72.89	74.00	-1.11	Peak	100	270	P
3	4824.00	-6.82	41.80	34.98	54.00	-19.02	Average	100	275	P
4	4824.00	-6.82	58.90	52.08	74.00	-21.92	Peak	100	275	P
5	12060.00	4.61	26.11	30.72	54.00	-23.28	Average	100	88	P
6	12060.00	4.61	39.80	44.41	74.00	-29.59	Peak	100	88	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH01	:	

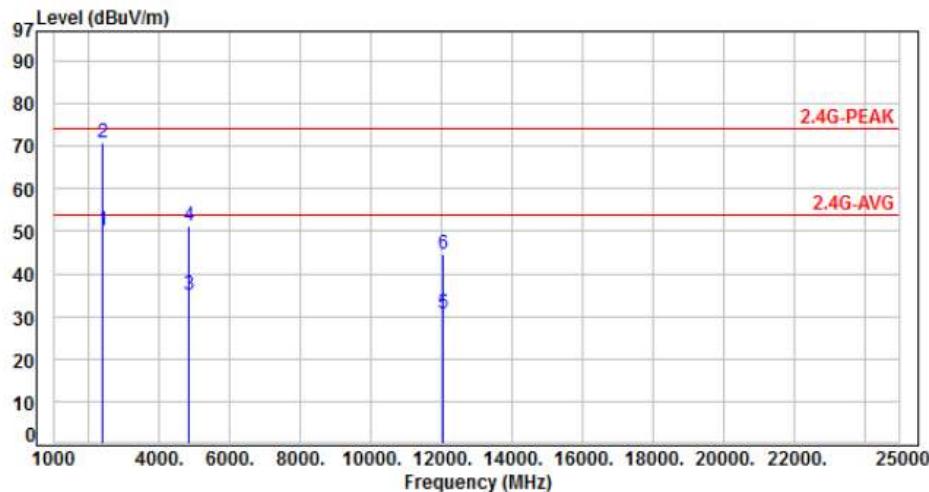

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	64.91	50.30	54.00	-3.70	Average	100	189	P
2	2390.00	-14.61	85.58	70.97	74.00	-3.03	Peak	100	189	P
3	4824.00	-6.82	42.00	35.18	54.00	-18.82	Average	100	211	P
4	4824.00	-6.82	58.10	51.28	74.00	-22.72	Peak	100	211	P
5	12060.00	4.61	25.96	30.57	54.00	-23.43	Average	100	315	P
6	12060.00	4.61	40.10	44.71	74.00	-29.29	Peak	100	315	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH06	:	

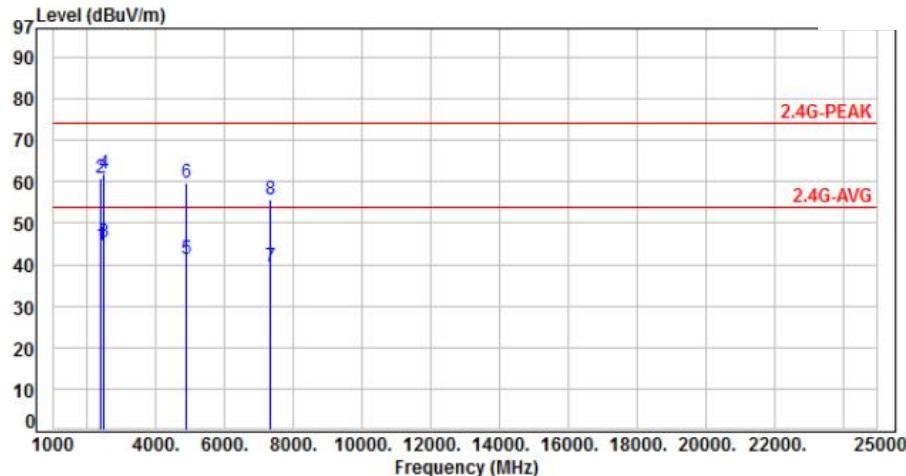

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	59.30	44.69	54.00	-9.31	Average	100	36	P
2	2390.00	-14.61	75.60	60.99	74.00	-13.01	Peak	100	36	P
3	2483.50	-14.22	59.52	45.30	54.00	-8.70	Average	100	36	P
4	2483.50	-14.22	76.30	62.08	74.00	-11.92	Peak	100	36	P
5	4874.00	-6.63	48.10	41.47	54.00	-12.53	Average	103	270	P
6	4874.00	-6.63	66.20	59.57	74.00	-14.43	Peak	103	270	P
7	7311.00	-1.28	40.60	39.32	54.00	-14.68	Average	100	167	P
8	7311.00	-1.28	56.90	55.62	74.00	-18.38	Peak	100	167	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH06	:	

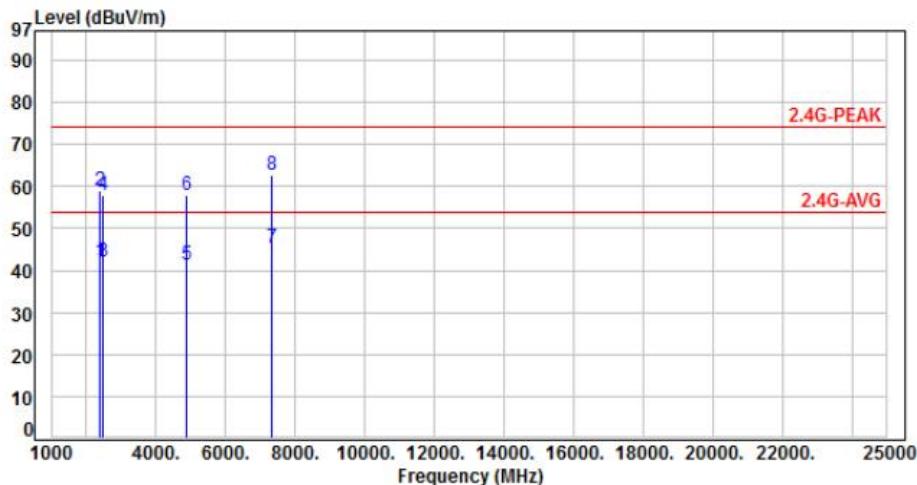

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	56.67	42.06	54.00	-11.94	Average	109	320	P
2	2390.00	-14.61	73.80	59.19	74.00	-14.81	Peak	109	320	P
3	2483.50	-14.22	56.40	42.18	54.00	-11.82	Average	109	320	P
4	2483.50	-14.22	72.10	57.88	74.00	-16.12	Peak	109	320	P
5	4874.00	-6.63	47.80	41.17	54.00	-12.83	Average	100	212	P
6	4874.00	-6.63	64.50	57.87	74.00	-16.13	Peak	100	212	P
7	7311.00	-1.28	46.70	45.42	54.00	-8.58	Average	104	10	P
8	7311.00	-1.28	63.80	62.52	74.00	-11.48	Peak	104	10	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH11	:	

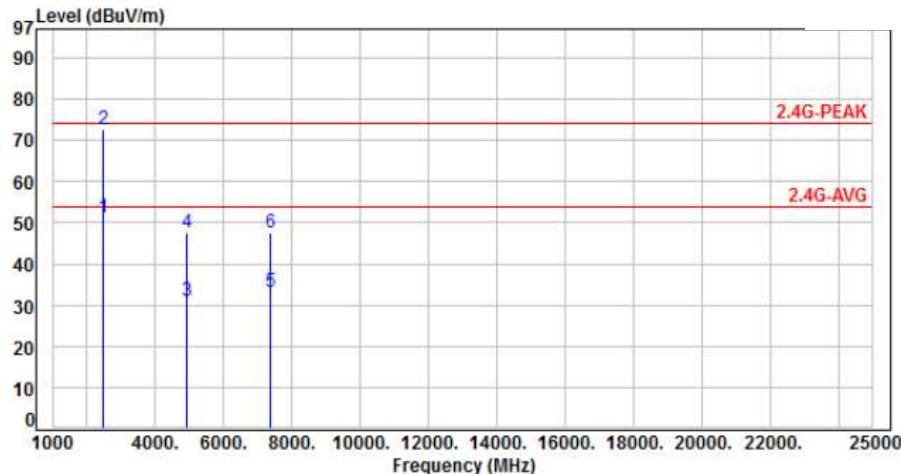

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	65.40	51.18	54.00	-2.82	Average	100	349	P
2	2483.50	-14.22	86.90	72.68	74.00	-1.32	Peak	100	349	P
3	4924.00	-6.50	37.55	31.05	54.00	-22.95	Average	100	244	P
4	4924.00	-6.50	54.10	47.60	74.00	-26.40	Peak	100	244	P
5	7386.00	-1.19	34.51	33.32	54.00	-20.68	Average	100	167	P
6	7386.00	-1.19	48.81	47.62	74.00	-26.38	Peak	100	167	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH11	:	

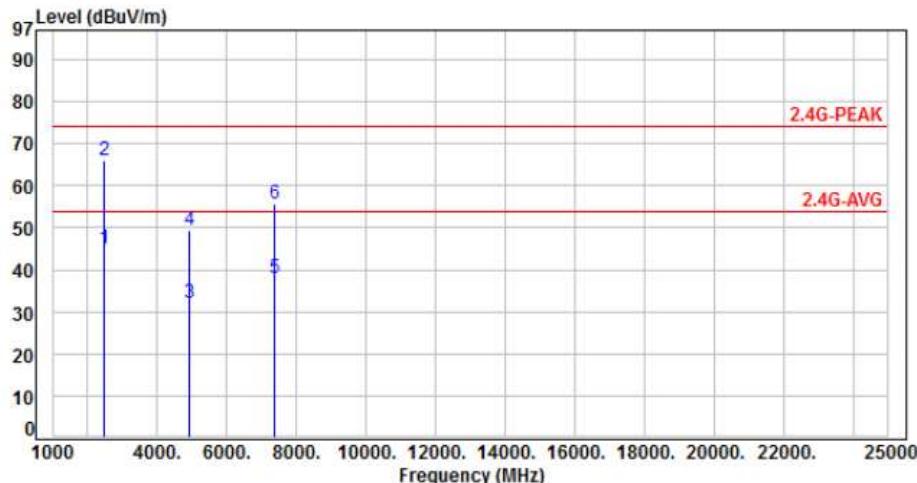

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	59.10	44.88	54.00	-9.12	Average	100	200	P
2	2483.50	-14.22	80.15	65.93	74.00	-8.07	Peak	100	200	P
3	4924.00	-6.50	38.50	32.00	54.00	-22.00	Average	100	212	P
4	4924.00	-6.50	55.90	49.40	74.00	-24.60	Peak	100	212	P
5	7386.00	-1.19	39.23	38.04	54.00	-15.96	Average	100	342	P
6	7386.00	-1.19	56.71	55.52	74.00	-18.48	Peak	100	342	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH01	:	

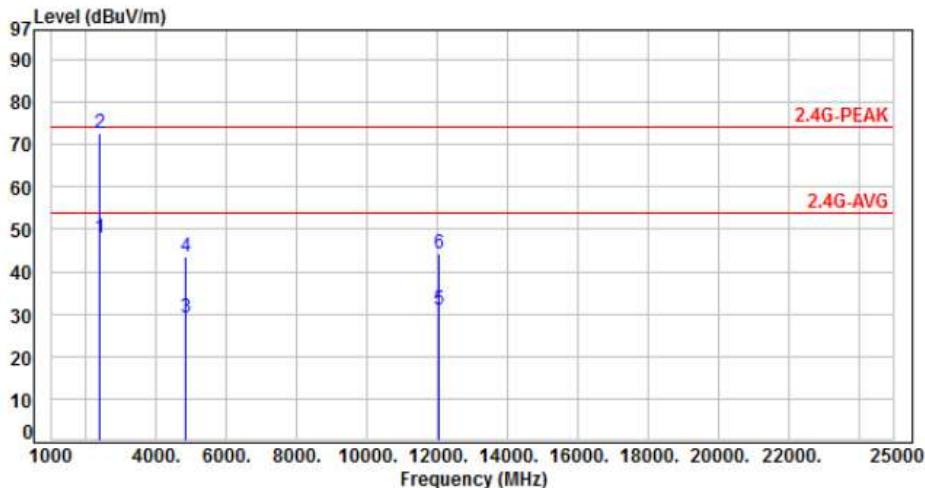

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	62.71	48.10	54.00	-5.90	Average	150	32	P
2	2390.00	-14.61	87.30	72.69	74.00	-1.31	Peak	150	32	P
3	4824.00	-6.82	35.88	29.06	54.00	-24.94	Average	100	282	P
4	4824.00	-6.82	50.31	43.49	74.00	-30.51	Peak	100	282	P
5	12060.00	4.61	26.21	30.82	54.00	-23.18	Average	100	73	P
6	12060.00	4.61	39.55	44.16	74.00	-29.84	Peak	100	73	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH01	:	

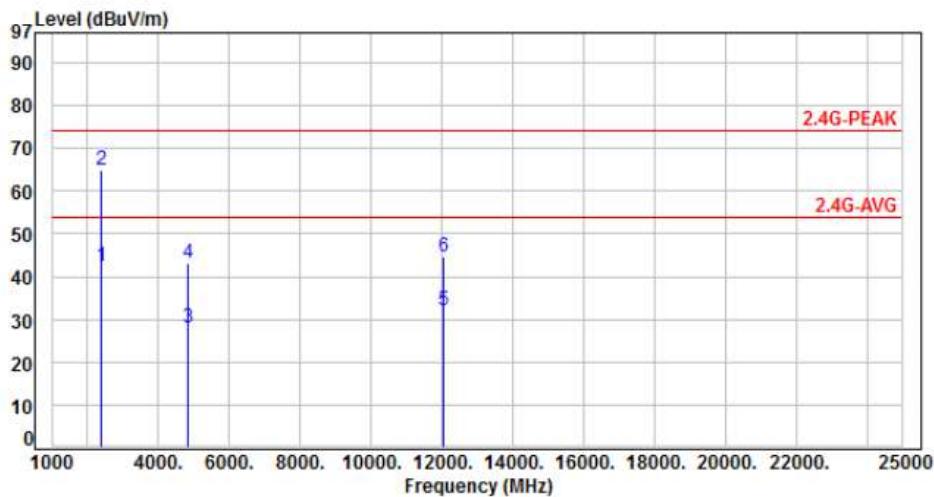

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P
1	2390.00	-14.61	57.10	42.49	54.00	-11.51	Average	100	180	P
2	2390.00	-14.61	79.60	64.99	74.00	-9.01	Peak	100	180	P
3	4824.00	-6.82	34.80	27.98	54.00	-26.02	Average	100	213	P
4	4824.00	-6.82	50.10	43.28	74.00	-30.72	Peak	100	213	P
5	12060.00	4.61	27.43	32.04	54.00	-21.96	Average	100	327	P
6	12060.00	4.61	40.11	44.72	74.00	-29.28	Peak	100	327	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH06	:	

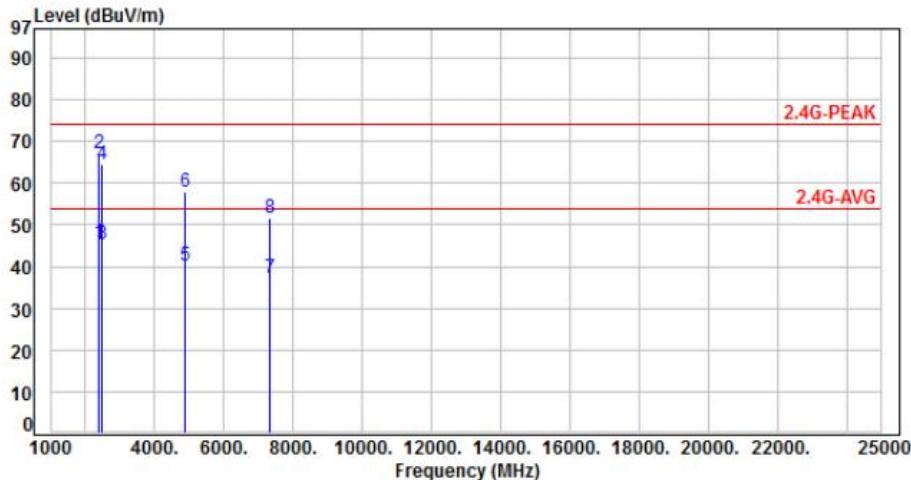

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	60.41	45.80	54.00	-8.20	Average	110	50	P
2	2390.00	-14.61	81.80	67.19	74.00	-6.81	Peak	110	50	P
3	2483.50	-14.22	59.50	45.28	54.00	-8.72	Average	110	50	P
4	2483.50	-14.22	78.60	64.38	74.00	-9.62	Peak	110	50	P
5	4874.00	-6.63	46.70	40.07	54.00	-13.93	Average	100	280	P
6	4874.00	-6.63	64.60	57.97	74.00	-16.03	Peak	100	280	P
7	7311.00	-1.28	38.70	37.42	54.00	-16.58	Average	100	31	P
8	7311.00	-1.28	52.80	51.52	74.00	-22.48	Peak	100	31	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH06	:	

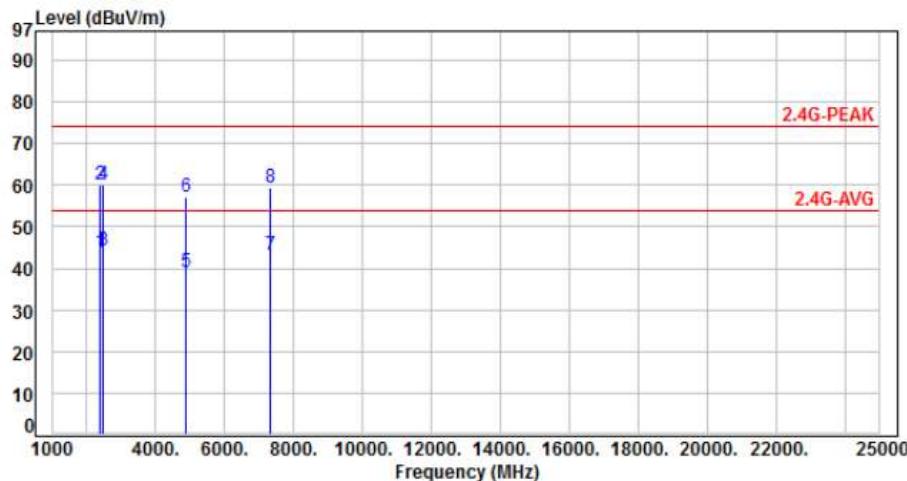

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	58.60	43.99	54.00	-10.01	Average	100	180	P
2	2390.00	-14.61	74.91	60.30	74.00	-13.70	Peak	100	180	P
3	2483.50	-14.22	58.40	44.18	54.00	-9.82	Average	100	180	P
4	2483.50	-14.22	74.50	60.28	74.00	-13.72	Peak	100	180	P
5	4874.00	-6.63	45.90	39.27	54.00	-14.73	Average	100	300	P
6	4874.00	-6.63	63.80	57.17	74.00	-16.83	Peak	100	300	P
7	7311.00	-1.28	44.60	43.32	54.00	-10.68	Average	100	336	P
8	7311.00	-1.28	60.70	59.42	74.00	-14.58	Peak	100	336	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH11	:	

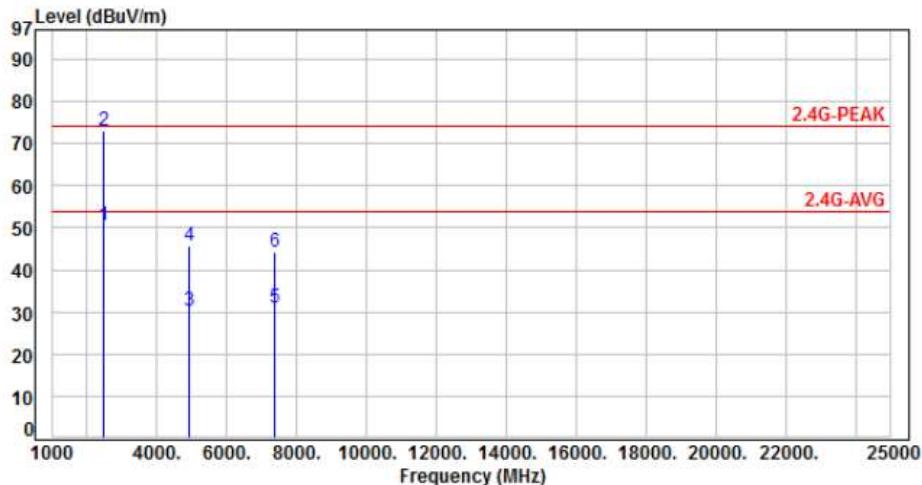

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	64.60	50.38	54.00	-3.62	Average	180	18	P
2	2483.50	-14.22	87.10	72.88	74.00	-1.12	Peak	180	18	P
3	4924.00	-6.50	36.60	30.10	54.00	-23.90	Average	104	241	P
4	4924.00	-6.50	52.20	45.70	74.00	-28.30	Peak	104	241	P
5	7386.00	-1.19	32.12	30.93	54.00	-23.07	Average	100	212	P
6	7386.00	-1.19	45.31	44.12	74.00	-29.88	Peak	100	212	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH11	:	

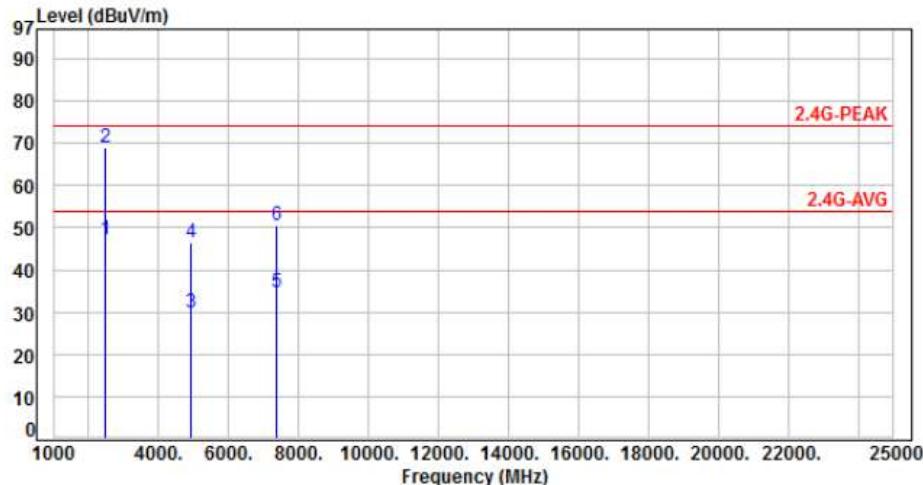

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	61.50	47.28	54.00	-6.72	Average	100	180	P
2	2483.50	-14.22	83.20	68.98	74.00	-5.02	Peak	100	180	P
3	4924.00	-6.50	36.20	29.70	54.00	-24.30	Average	100	351	P
4	4924.00	-6.50	52.80	46.30	74.00	-27.70	Peak	100	351	P
5	7386.00	-1.19	35.91	34.72	54.00	-19.28	Average	100	51	P
6	7386.00	-1.19	51.71	50.52	74.00	-23.48	Peak	100	51	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH03	:	

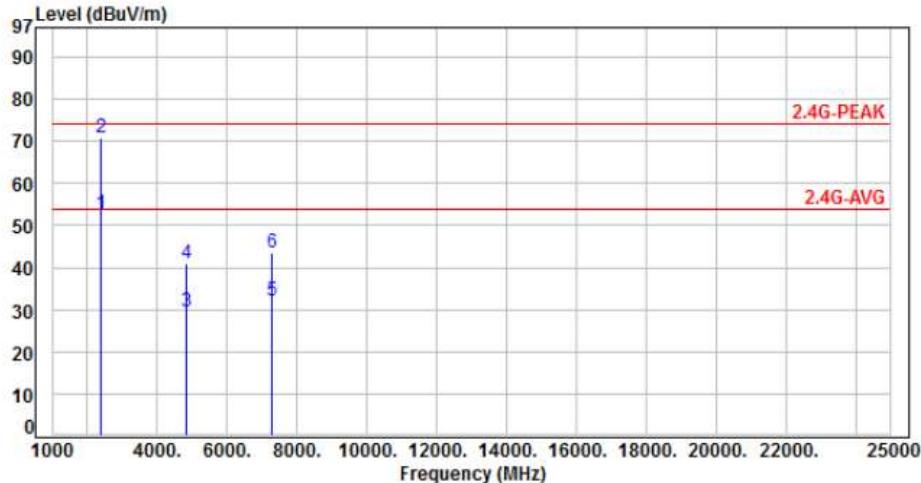

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	67.51	52.90	54.00	-1.10	Average	160	30	P
2	2390.00	-14.61	85.61	71.00	74.00	-3.00	Peak	160	30	P
3	4844.00	-6.72	36.11	29.39	54.00	-24.61	Average	100	241	P
4	4844.00	-6.72	47.79	41.07	74.00	-32.93	Peak	100	241	P
5	7266.00	-1.49	33.56	32.07	54.00	-21.93	Average	100	73	P
6	7266.00	-1.49	44.90	43.41	74.00	-30.59	Peak	100	73	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH03	:	

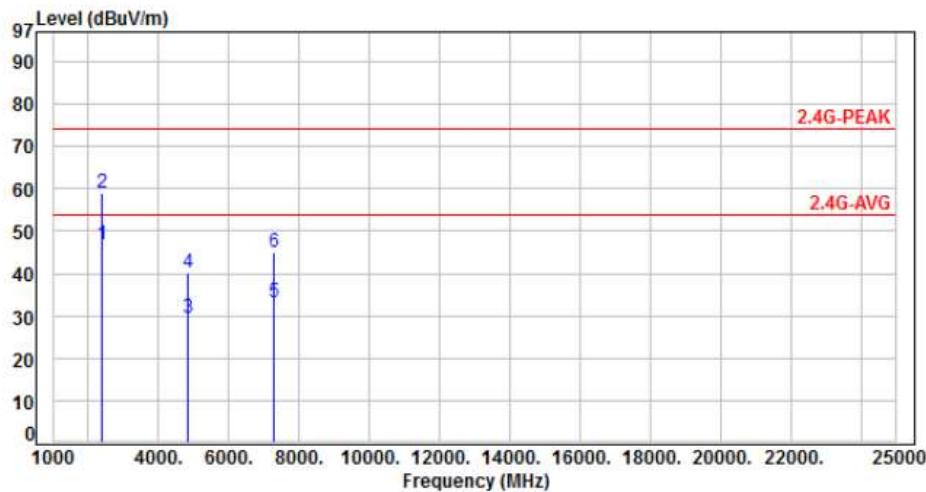

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	61.30	46.69	54.00	-7.31	Average	100	175	P
2	2390.00	-14.61	73.60	58.99	74.00	-15.01	Peak	100	175	P
3	4844.00	-6.72	36.21	29.49	54.00	-24.51	Average	100	343	P
4	4844.00	-6.72	46.79	40.07	74.00	-33.93	Peak	100	343	P
5	7266.00	-1.49	34.51	33.02	54.00	-20.98	Average	100	311	P
6	7266.00	-1.49	46.40	44.91	74.00	-29.09	Peak	100	311	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH06	:	

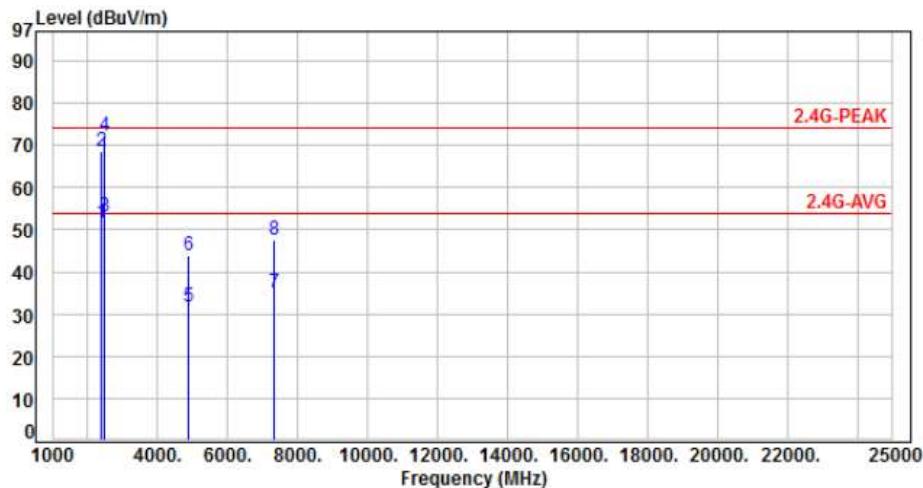

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	66.21	51.60	54.00	-2.40	Average	145	33	P
2	2390.00	-14.61	83.11	68.50	74.00	-5.50	Peak	145	33	P
3	2483.50	-14.22	67.20	52.98	54.00	-1.02	Average	145	33	P
4	2483.50	-14.22	86.60	72.38	74.00	-1.62	Peak	145	33	P
5	4874.00	-6.63	38.50	31.87	54.00	-22.13	Average	100	210	P
6	4874.00	-6.63	50.60	43.97	74.00	-30.03	Peak	100	210	P
7	7311.00	-1.28	36.40	35.12	54.00	-18.88	Average	100	85	P
8	7311.00	-1.28	48.70	47.42	74.00	-26.58	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH06	:	

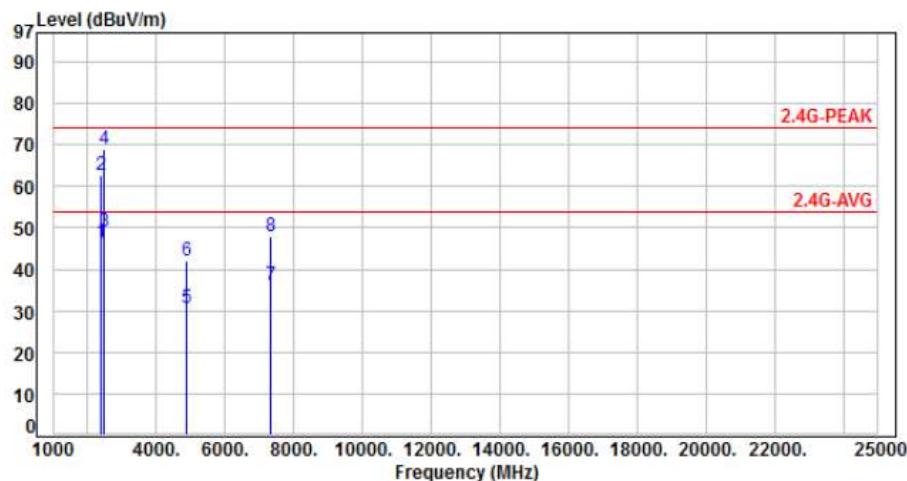

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	61.23	46.62	54.00	-7.38	Average	100	199	P
2	2390.00	-14.61	77.21	62.60	74.00	-11.40	Peak	100	199	P
3	2483.50	-14.22	63.32	49.10	54.00	-4.90	Average	100	199	P
4	2483.50	-14.22	83.10	68.88	74.00	-5.12	Peak	100	199	P
5	4874.00	-6.63	37.20	30.57	54.00	-23.43	Average	112	230	P
6	4874.00	-6.63	48.80	42.17	74.00	-31.83	Peak	112	230	P
7	7311.00	-1.28	37.50	36.22	54.00	-17.78	Average	100	358	P
8	7311.00	-1.28	49.30	48.02	74.00	-25.98	Peak	100	358	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH09	:	

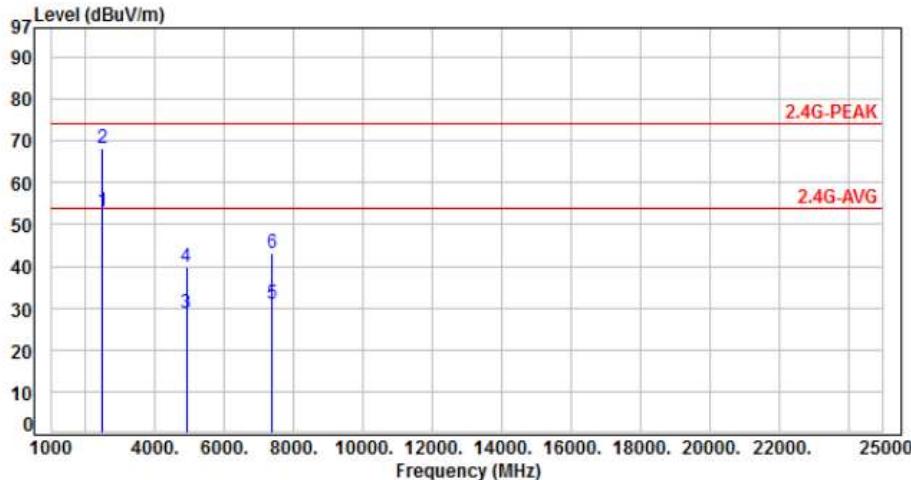

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	67.20	52.98	54.00	-1.02	Average	180	16	P
2	2483.50	-14.22	82.50	68.28	74.00	-5.72	Peak	180	16	P
3	4904.00	-6.55	35.50	28.95	54.00	-25.05	Average	100	355	P
4	4904.00	-6.55	46.20	39.65	74.00	-34.35	Peak	100	355	P
5	7356.00	-1.26	32.21	30.95	54.00	-23.05	Average	100	79	P
6	7356.00	-1.26	44.51	43.25	74.00	-30.75	Peak	100	79	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	DC 5V from system	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH09	:	

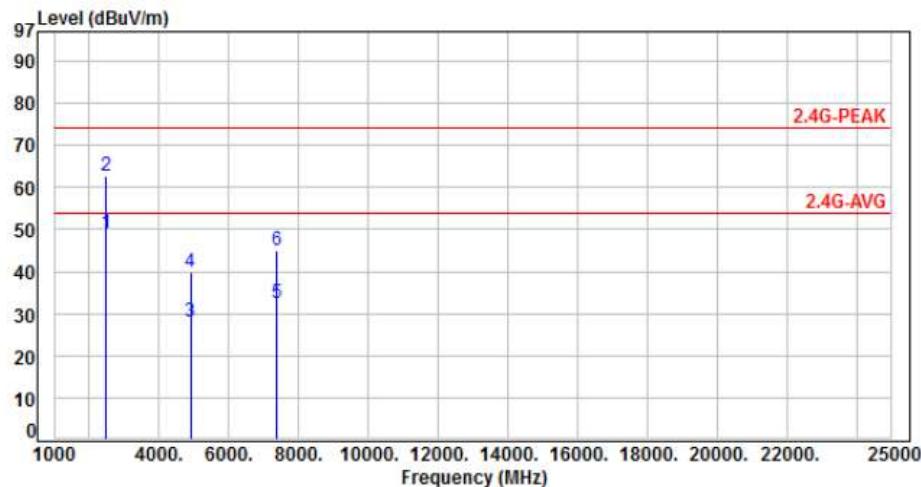

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	63.30	49.08	54.00	-4.92	Average	100	184	P
2	2483.50	-14.22	76.80	62.58	74.00	-11.42	Peak	100	184	P
3	4904.00	-6.55	34.50	27.95	54.00	-26.05	Average	100	211	P
4	4904.00	-6.55	46.40	39.85	74.00	-34.15	Peak	100	211	P
5	7356.00	-1.26	33.71	32.45	54.00	-21.55	Average	100	354	P
6	7356.00	-1.26	45.05	74.00	-28.95	Peak	100	354	354	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below –20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data

Note: Test plots refers to the following pages.








ANTA

Modulation Type: 802.11b, CH 01

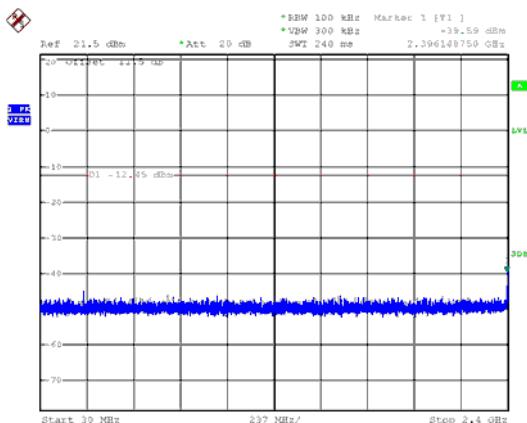




Modulation Type: 802.11b, CH 06

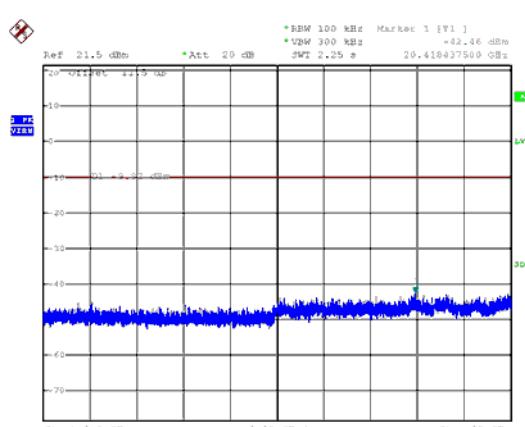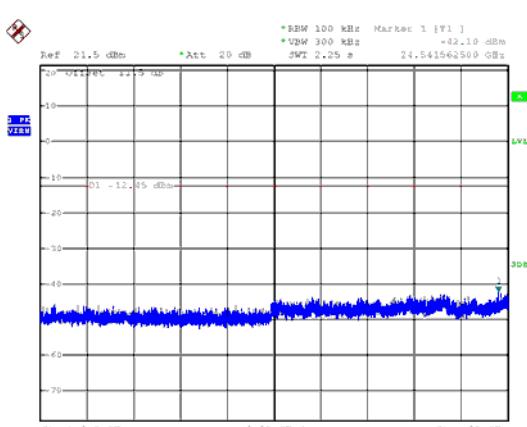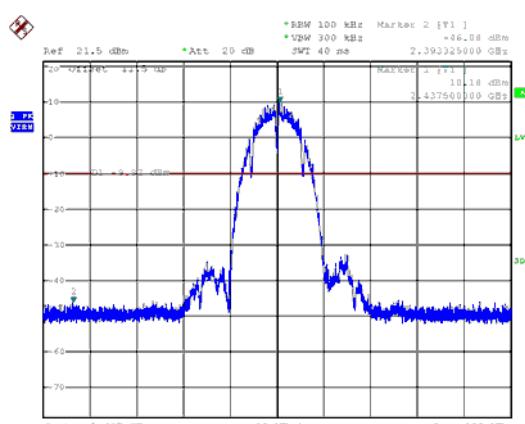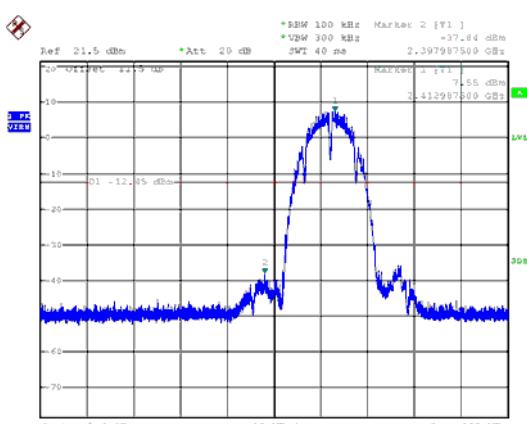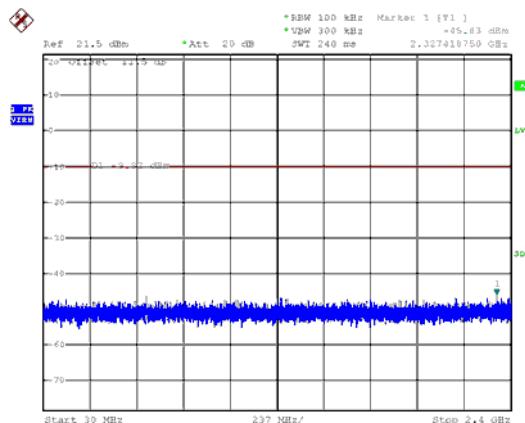




ANTA

Modulation Type: 802.11b, CH 11



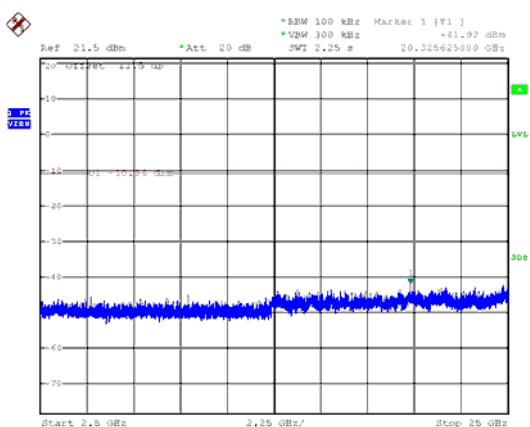
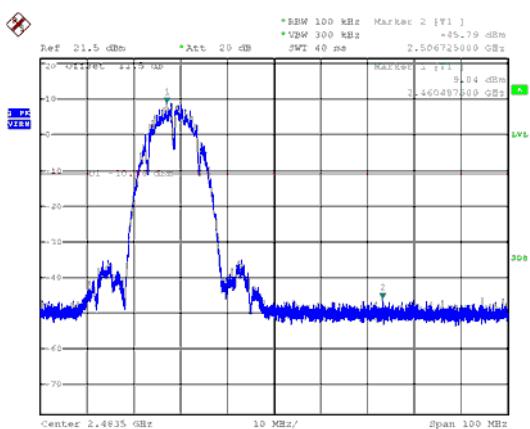
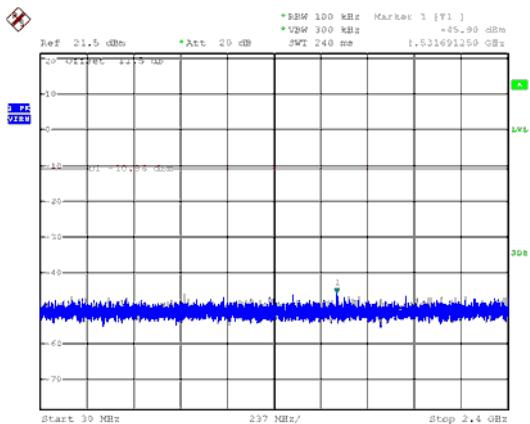


ANT A

Modulation Type: 802.11g, CH 01

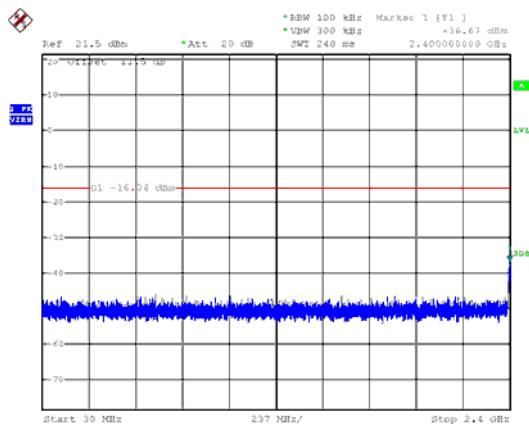




Modulation Type: 802.11g, CH 06

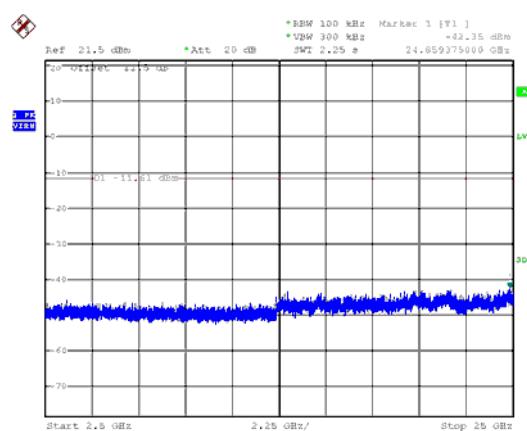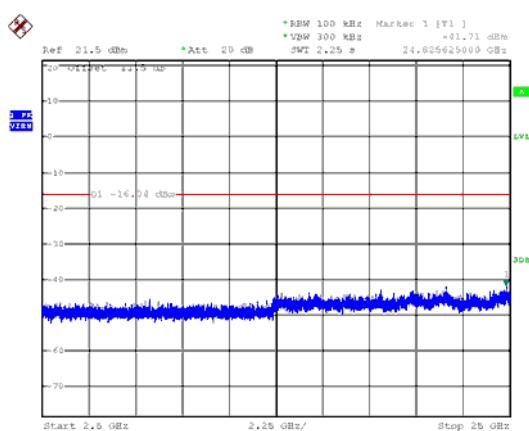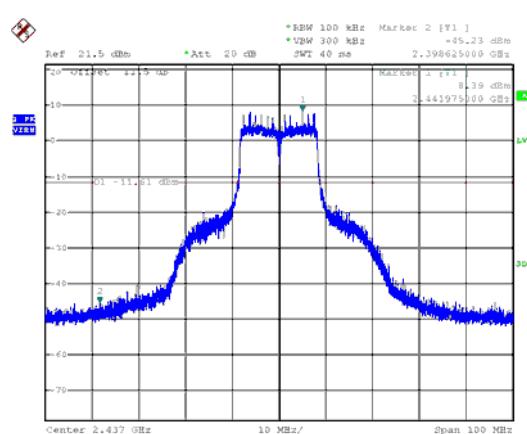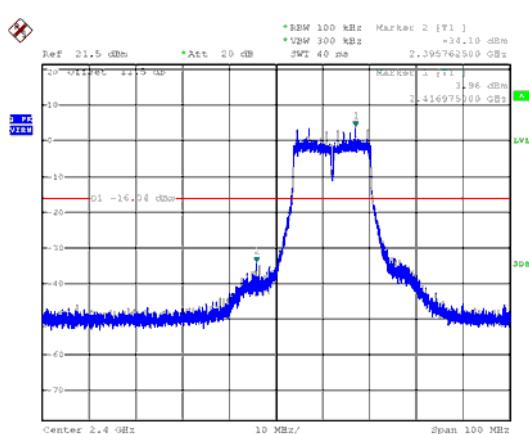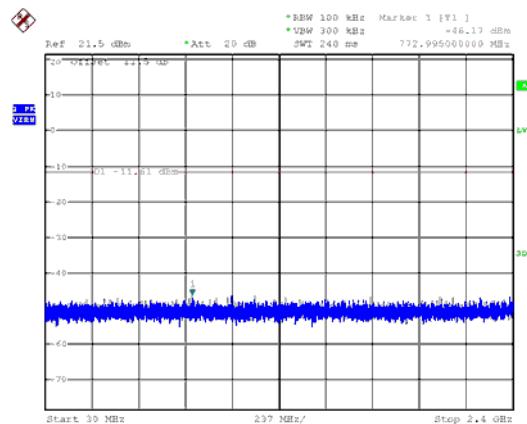



ANTA


Modulation Type: 802.11g, CH 11

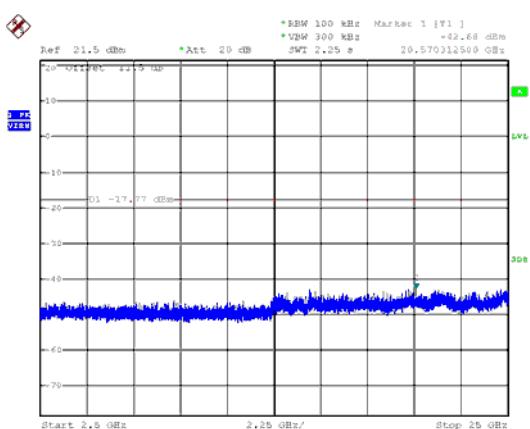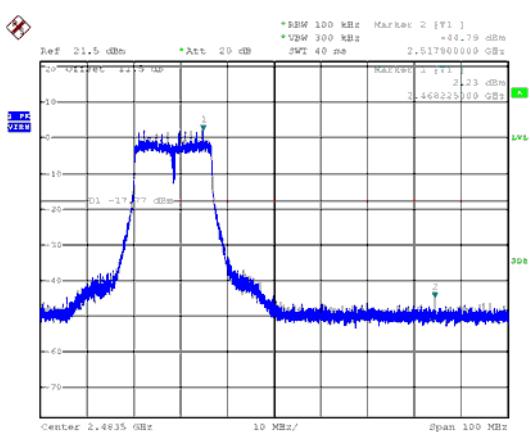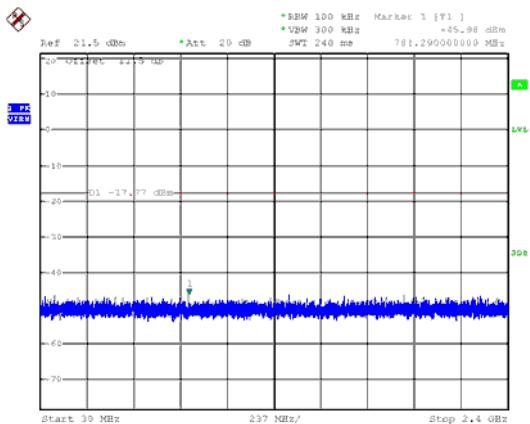








ANT A

Modulation Type: 802.11n HT20, CH01

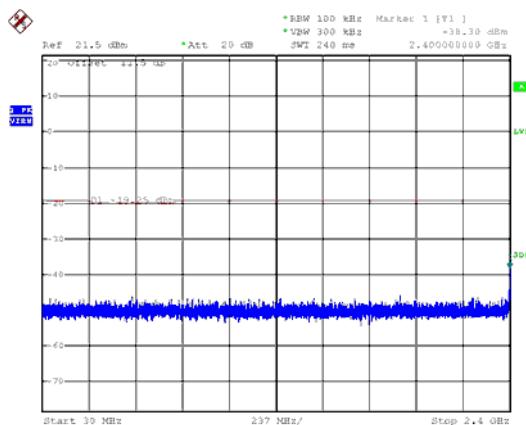




Modulation Type: 802.11n HT20, CH06

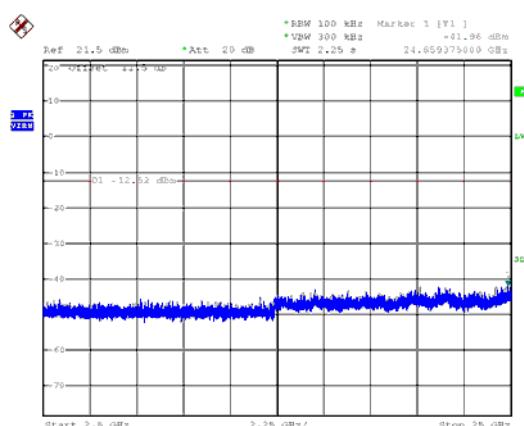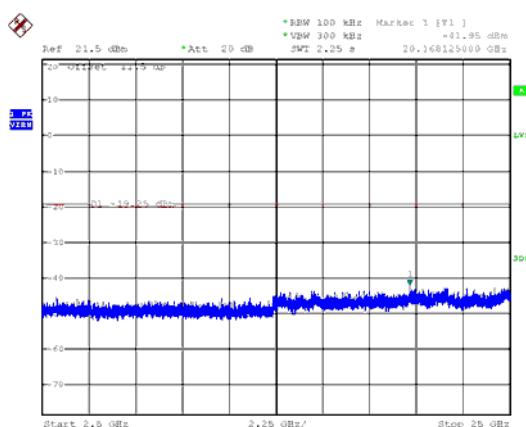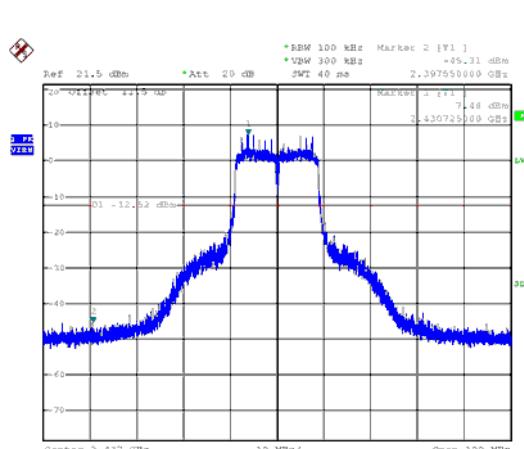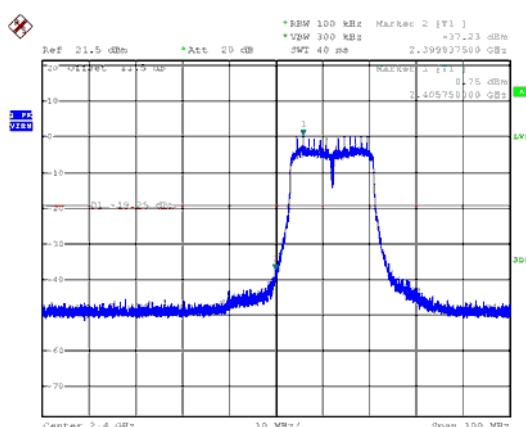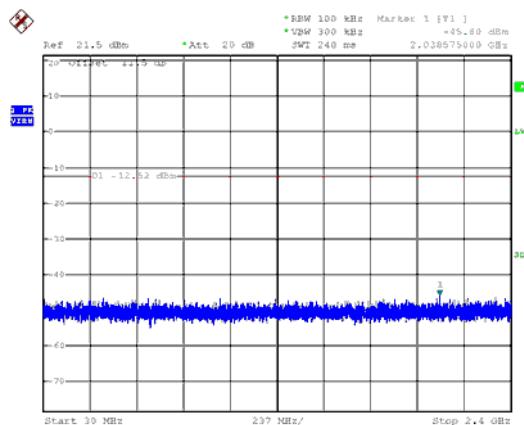



ANTA


Modulation Type: 802.11n HT20, CH11

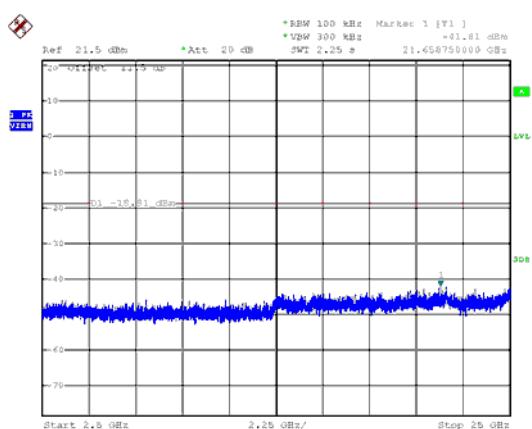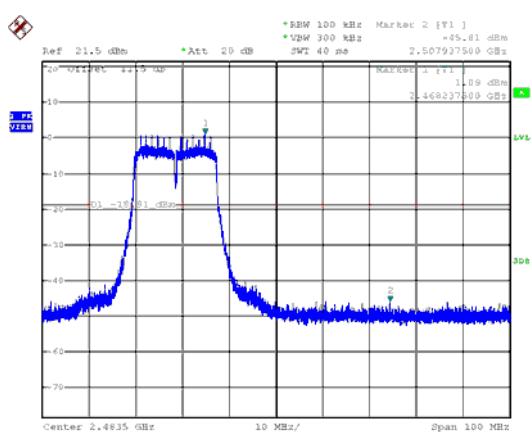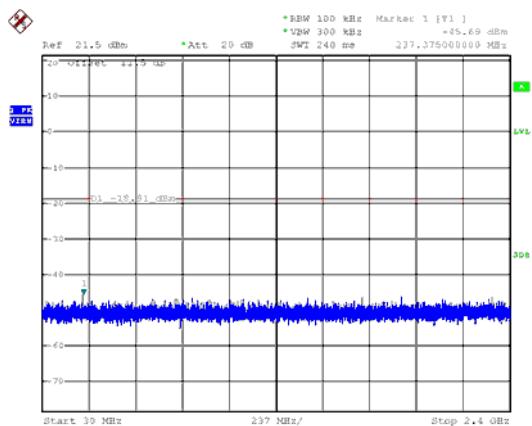








ANT A

Modulation Type: 802.11n HT40, CH03

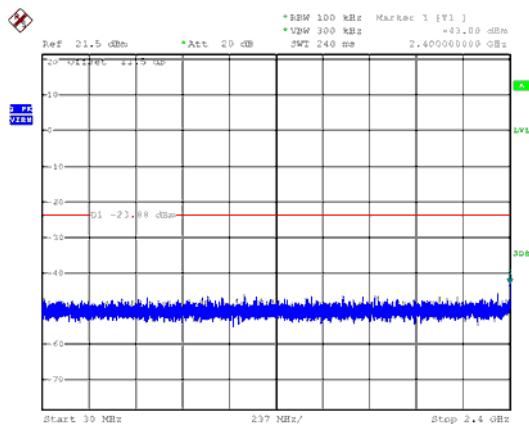




Modulation Type: 802.11n HT40, CH06

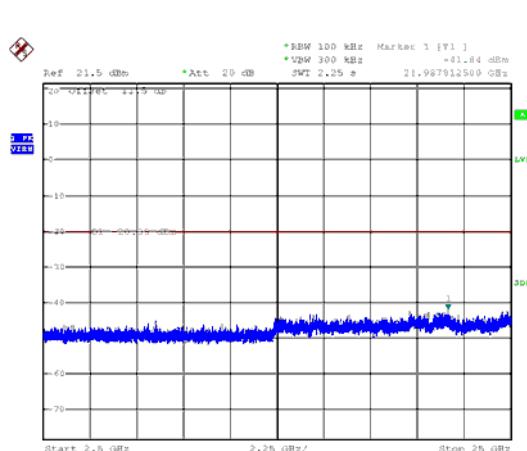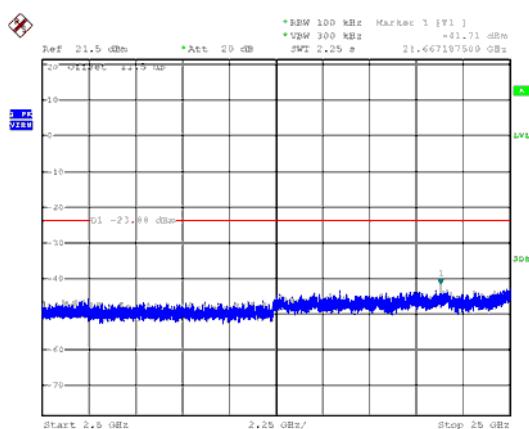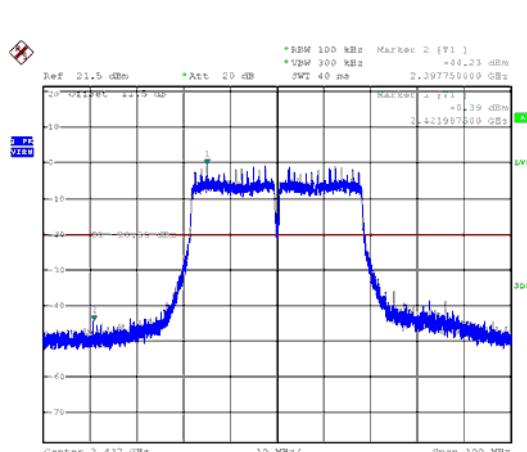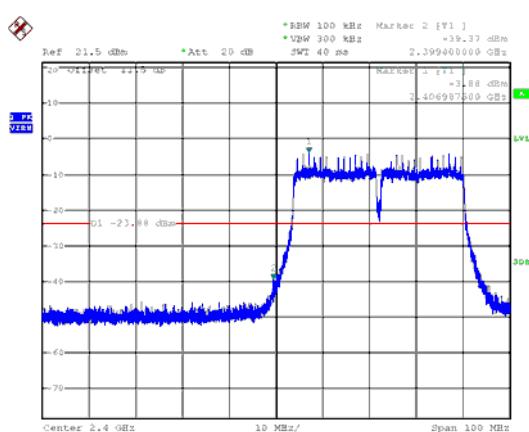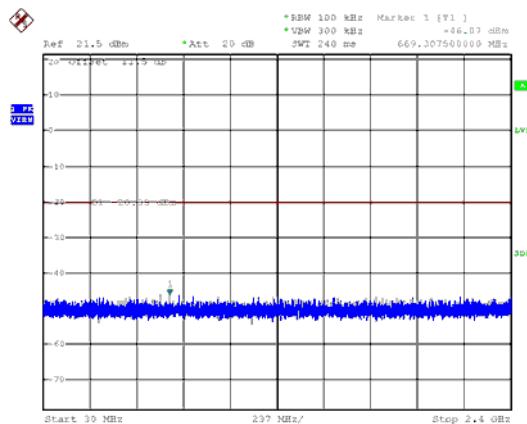



ANTA


Modulation Type: 802.11n HT40, CH09

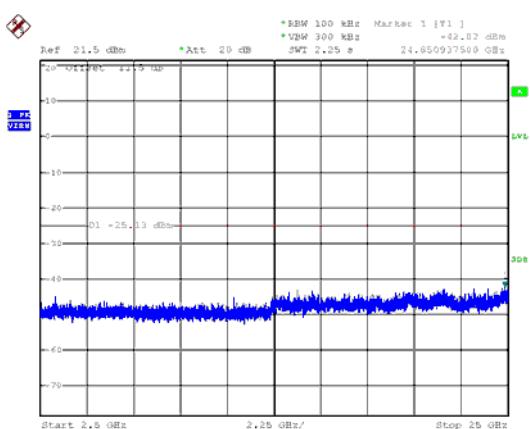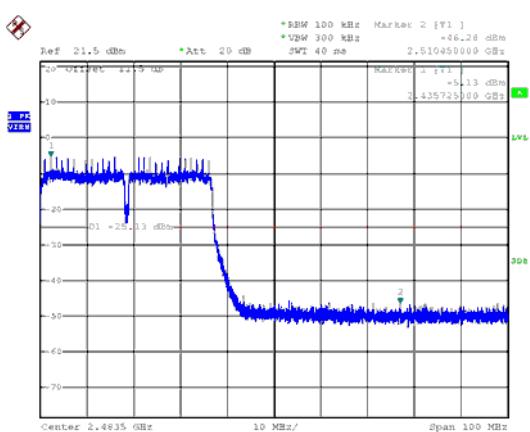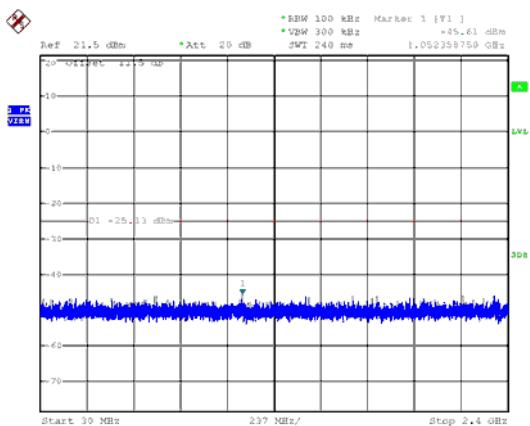








ANT B

Modulation Type: 802.11b, CH 01

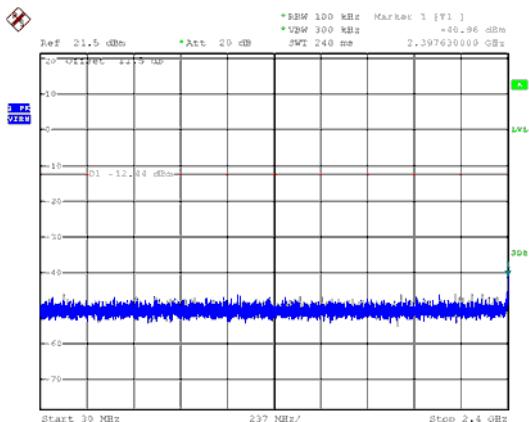




Modulation Type: 802.11b, CH 06

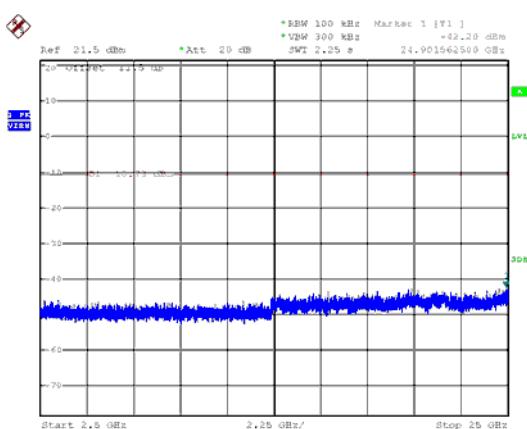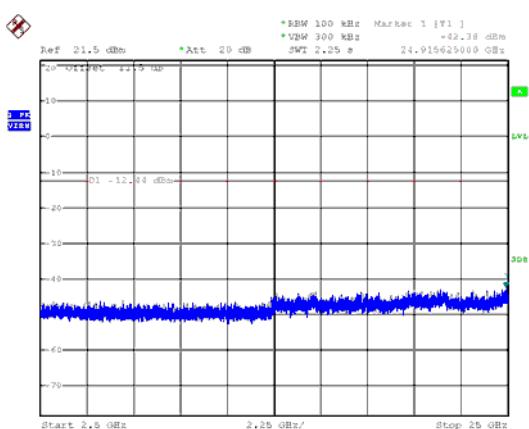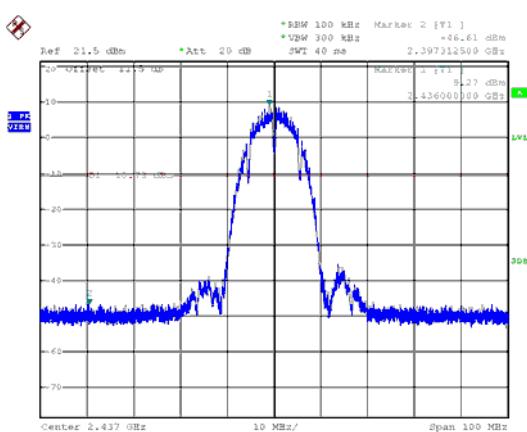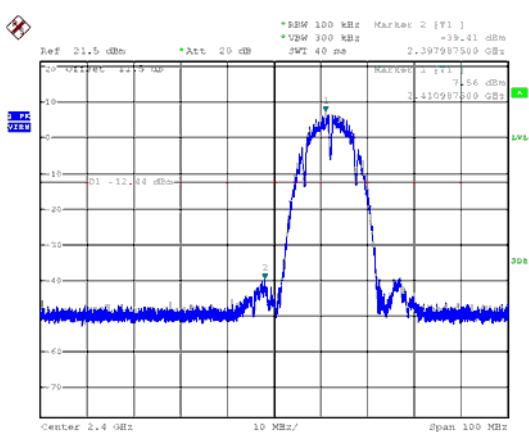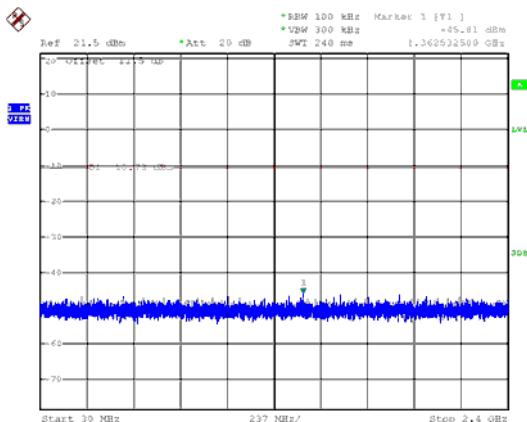



ANT B


Modulation Type: 802.11b, CH 11

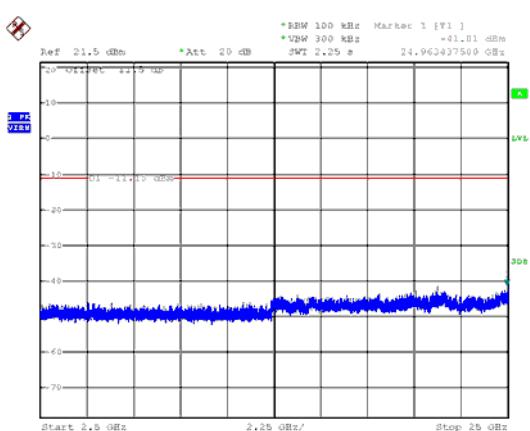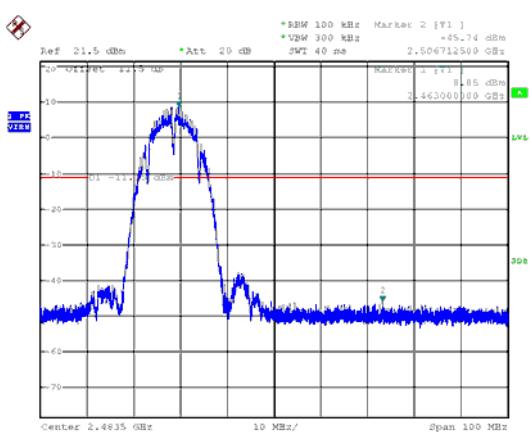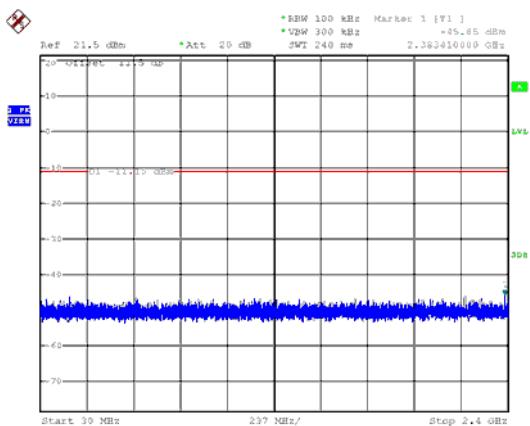








ANT B

Modulation Type: 802.11g, CH 01

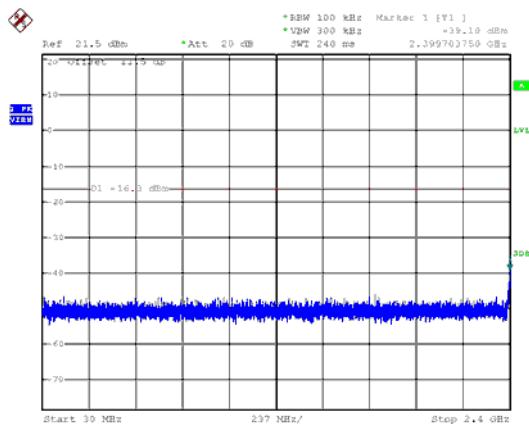




Modulation Type: 802.11g, CH 06

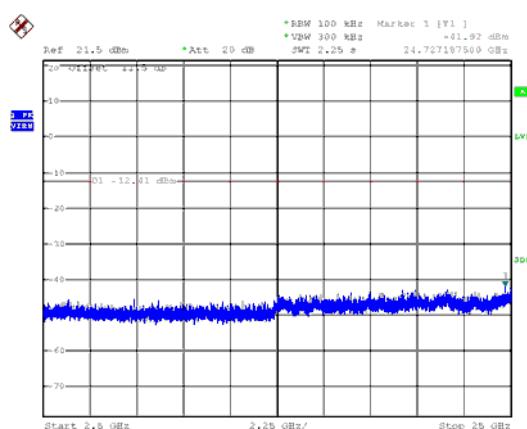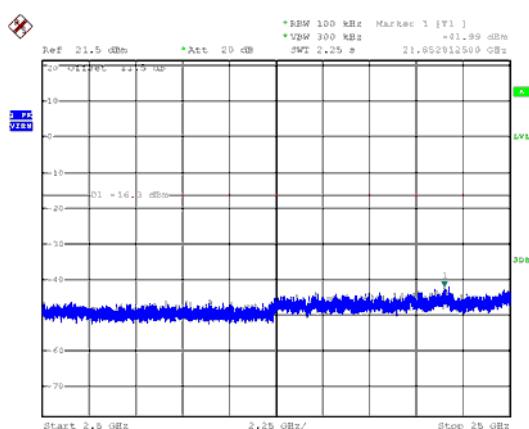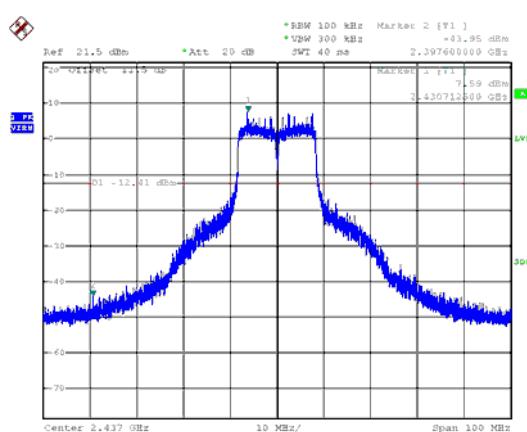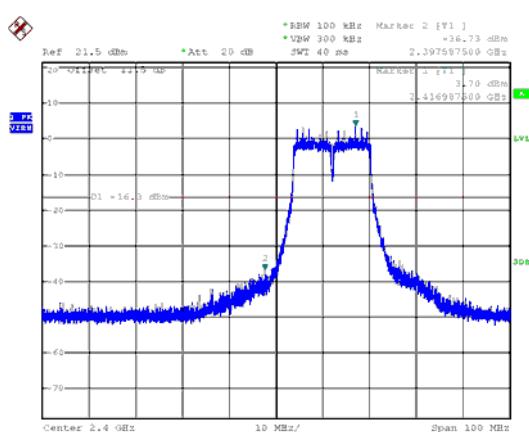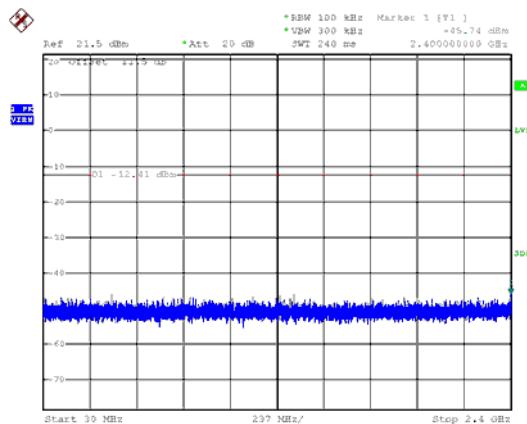



ANT B


Modulation Type: 802.11g, CH 11

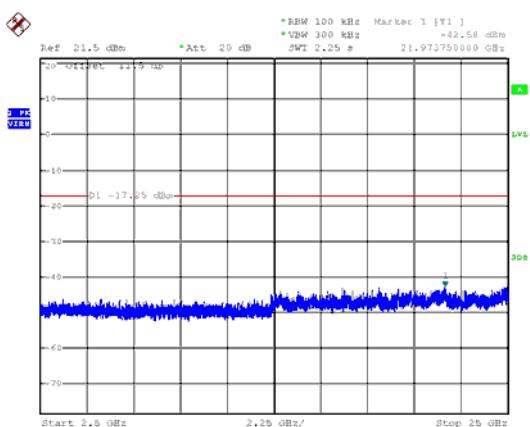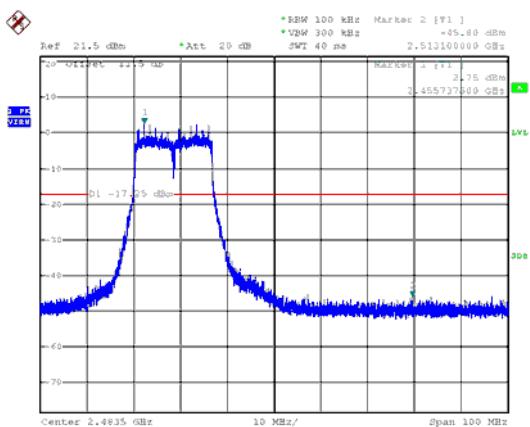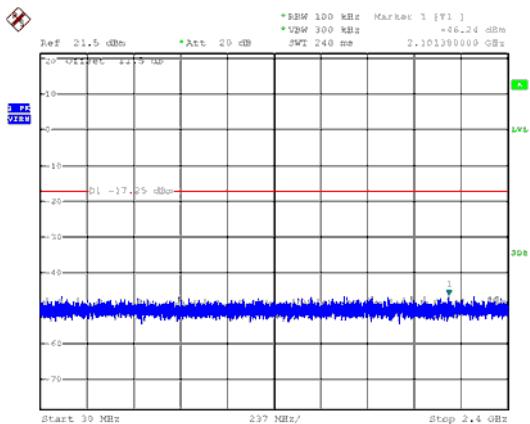








ANT B

Modulation Type: 802.11n HT20, CH01

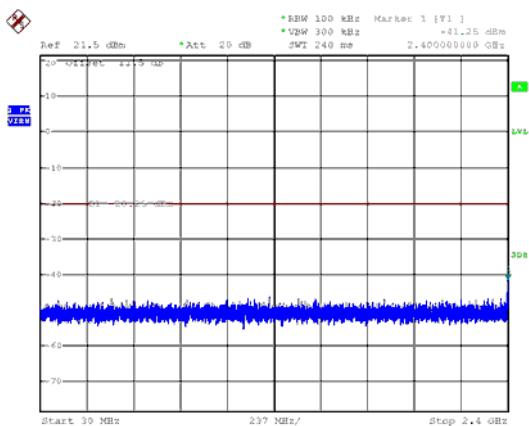




Modulation Type: 802.11n HT20, CH06

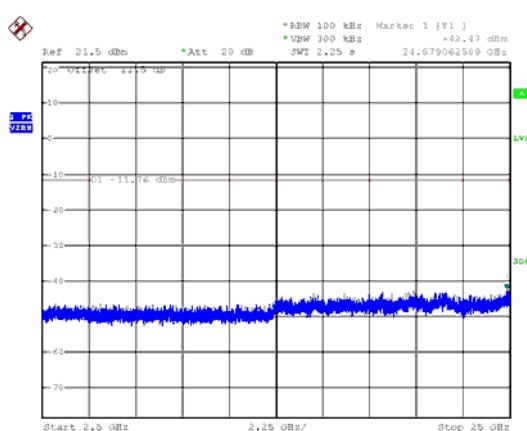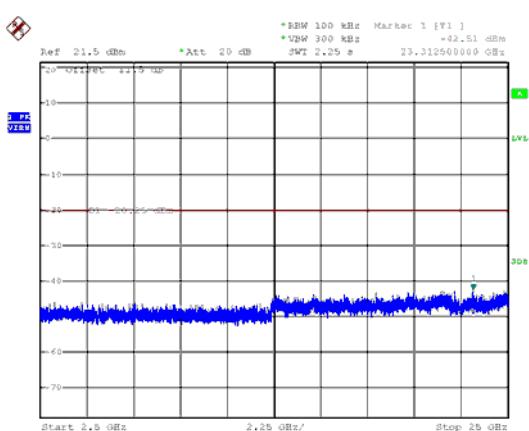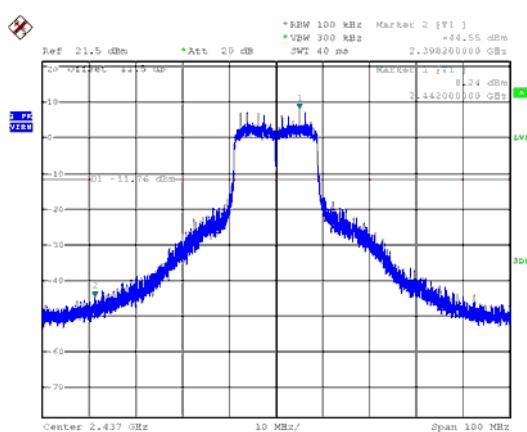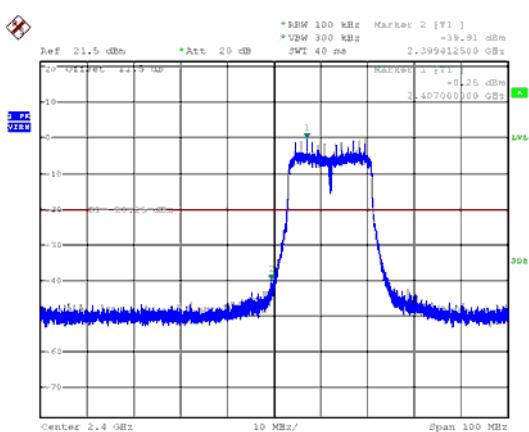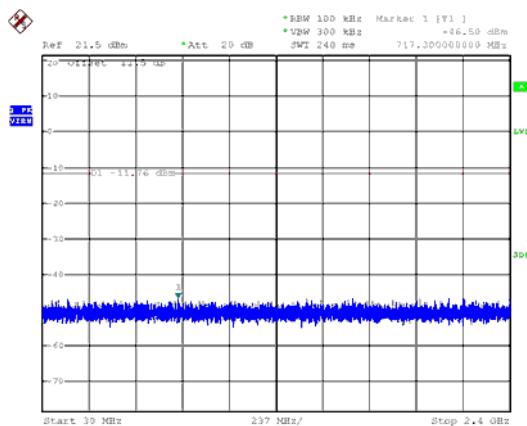



ANT B


Modulation Type: 802.11n HT20, CH11

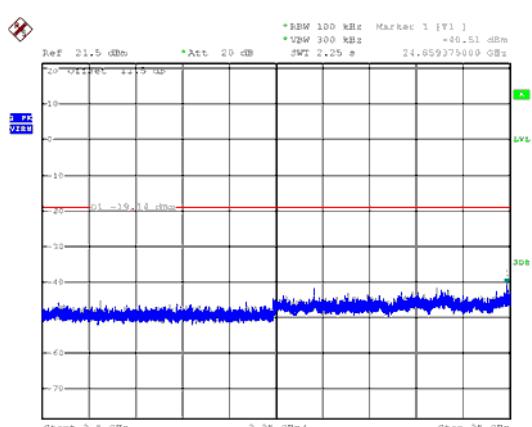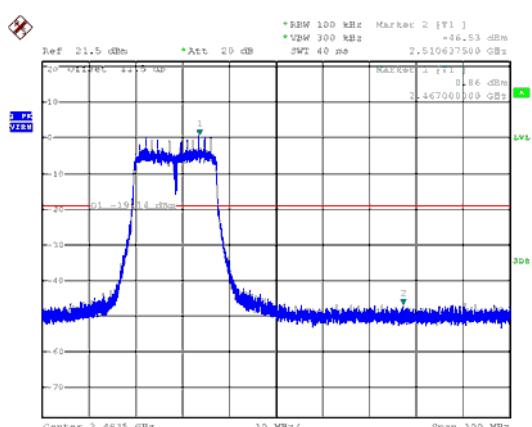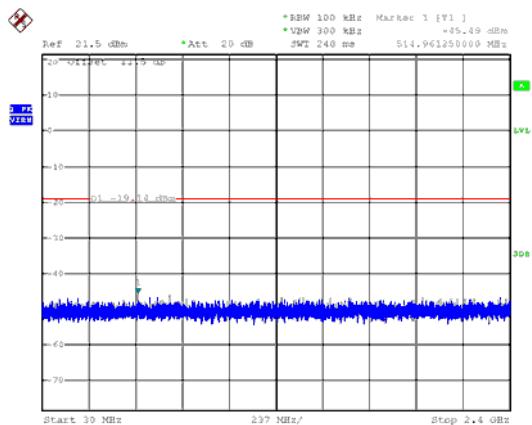








ANT B

Modulation Type: 802.11n HT40, CH03

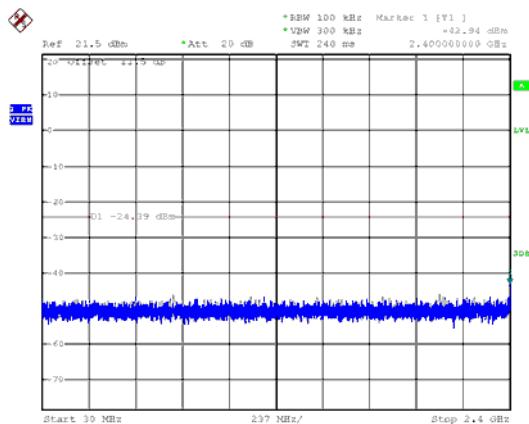




Modulation Type: 802.11n HT40, CH06

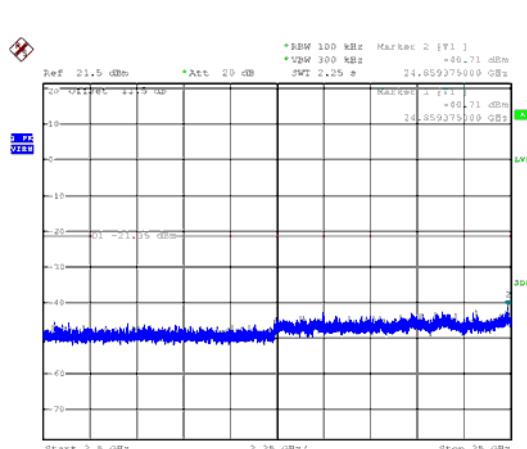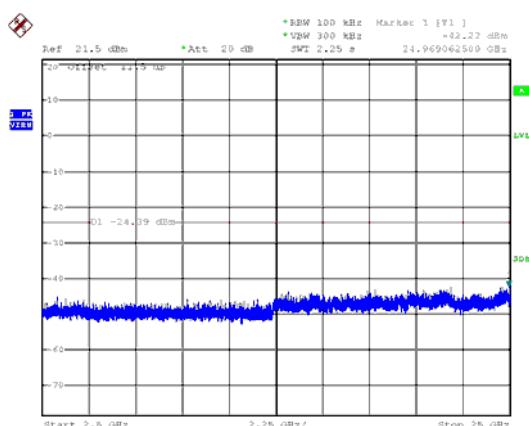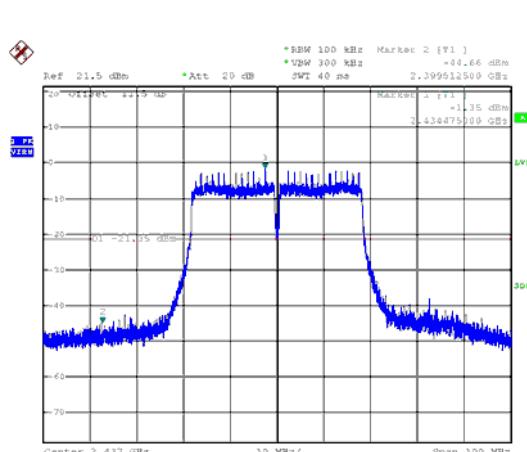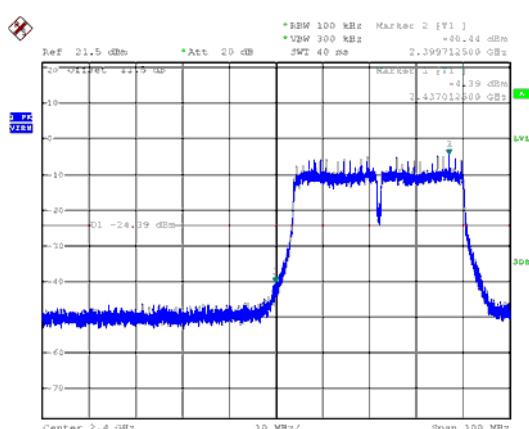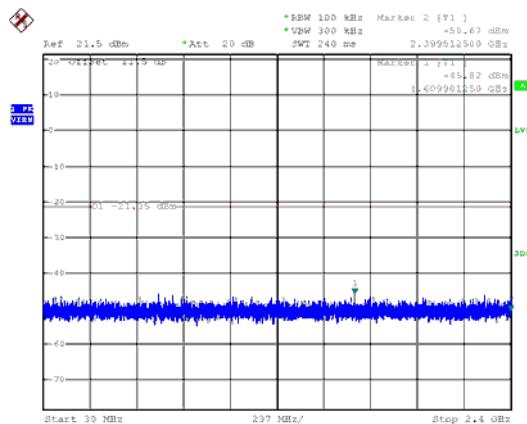



ANT B

Modulation Type: 802.11n HT40, CH09

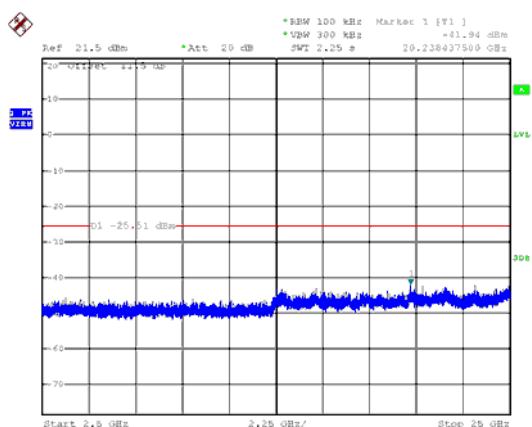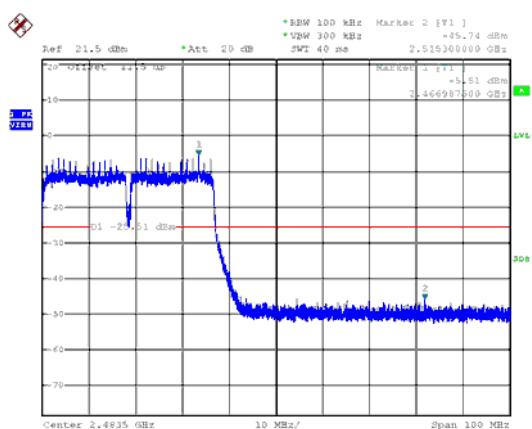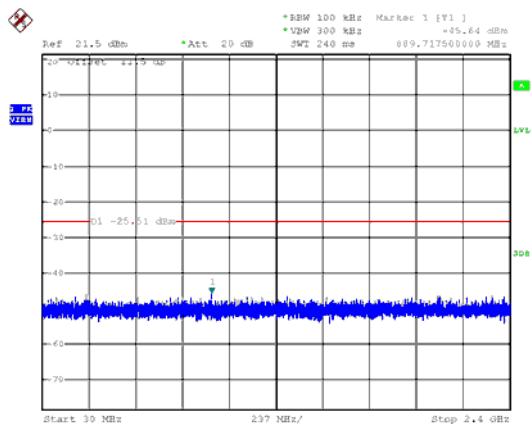



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
11b,1M	8.27	8.27	99.96%
11g,6M	1.39	1.41	98.23%
11n HT20	1.31	1.33	98.12%
11n HT40	0.64	0.68	94.15%




Modulation Type: 802.11b (1Mbps)

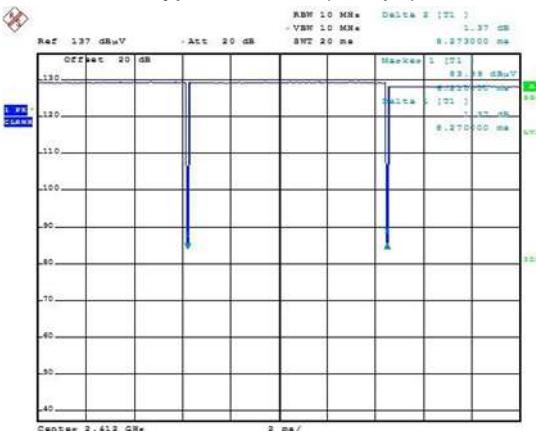


Modulation Type: 802.11g (6Mbps)

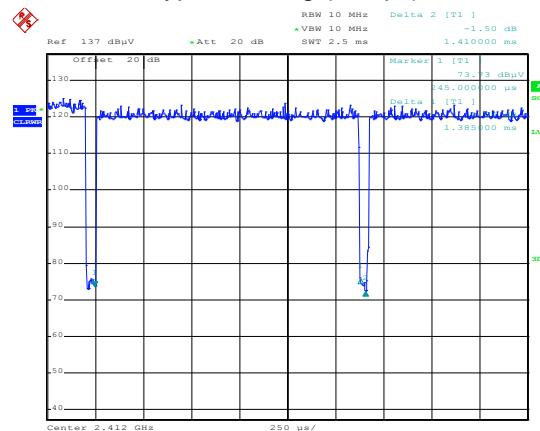

Modulation Type: 802.11n HT20 (6.5Mbps)

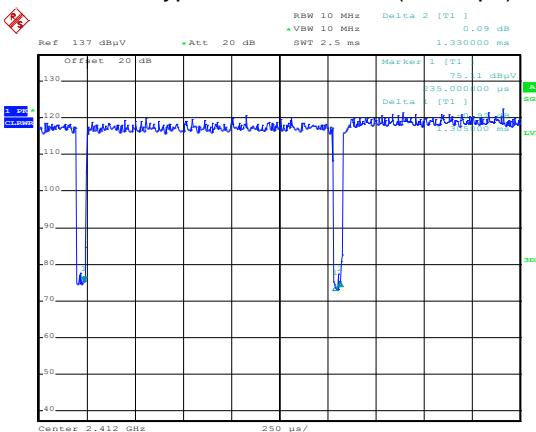

Modulation Type: 802.11n HT40 (13.5Mbps)

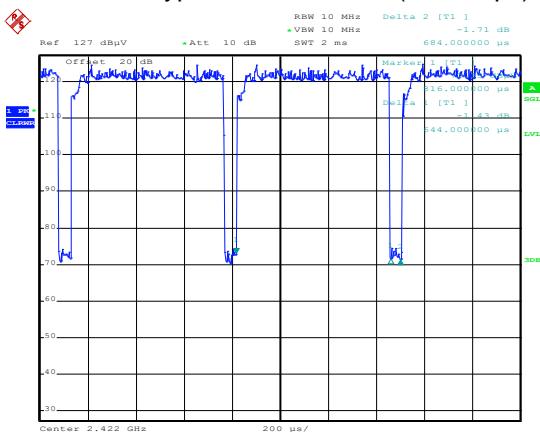



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A	ANT B	
11b	1	2412	10.10	9.50	0.5
	6	2437	9.10	9.10	0.5
	11	2462	9.10	9.10	0.5
11g	1	2412	16.40	16.40	0.5
	6	2437	16.30	16.40	0.5
	11	2462	16.40	16.40	0.5
11n HT20	1	2412	17.00	17.30	0.5
	6	2437	17.00	17.30	0.5
	11	2462	17.20	17.30	0.5
11n HT40	3	2422	35.80	35.80	0.5
	6	2437	35.80	35.80	0.5
	9	2452	36.00	35.80	0.5




ANT A


Modulation Type: 802.11b
CH01

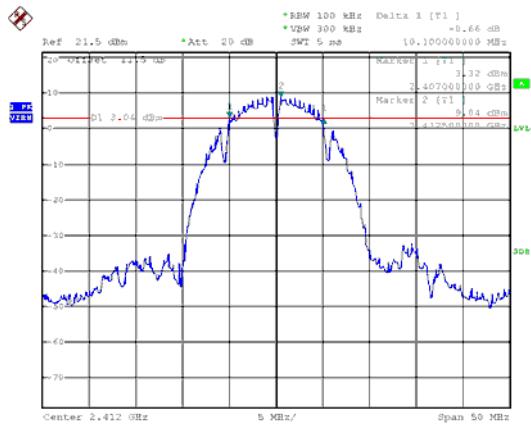


Modulation Type: 802.11g
CH01

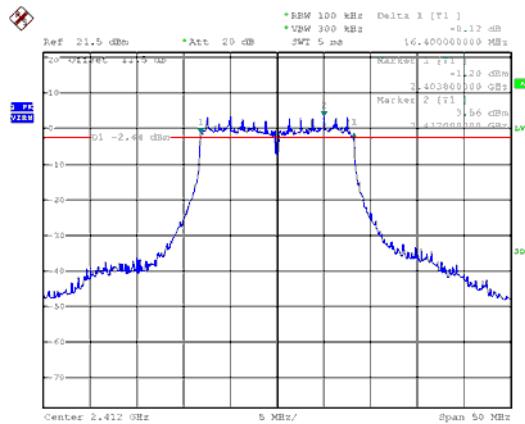


CH06

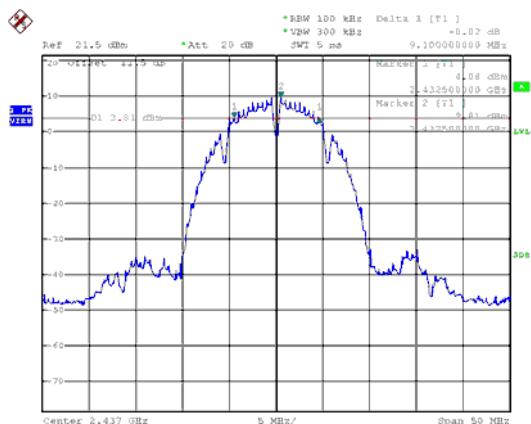


CH06

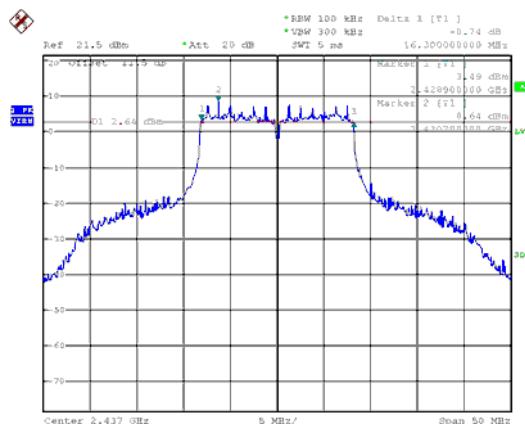

CH11

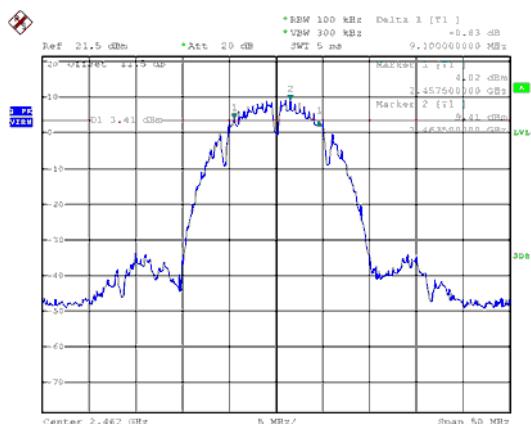


CH11

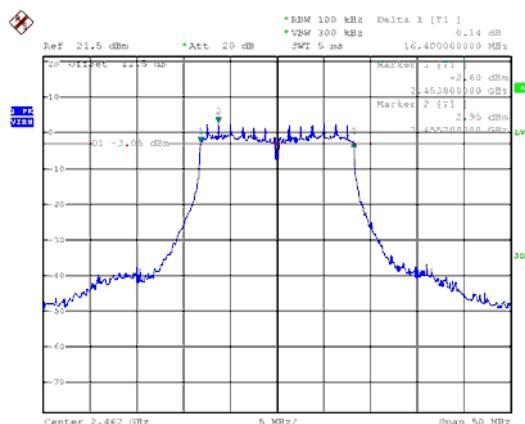




ANT A


Modulation Type: 802.11n HT20
CH01

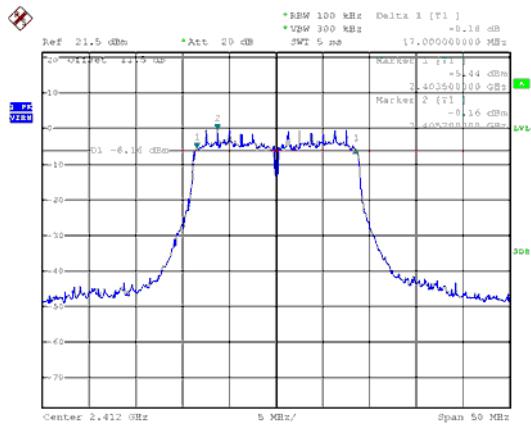


Modulation Type: 802.11n HT40
CH03

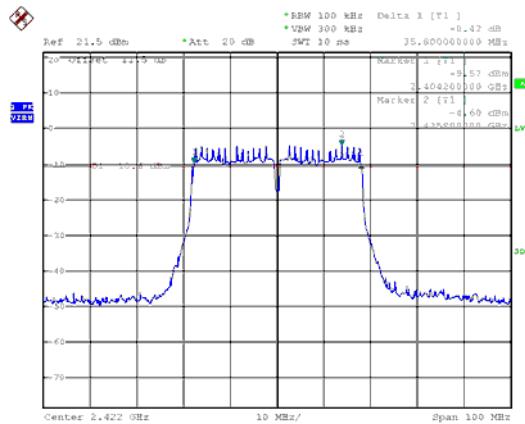


CH06

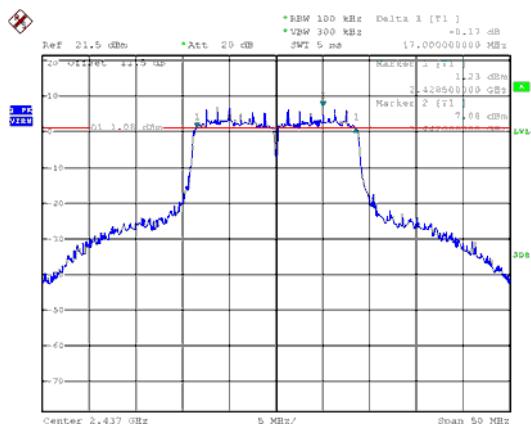


CH06

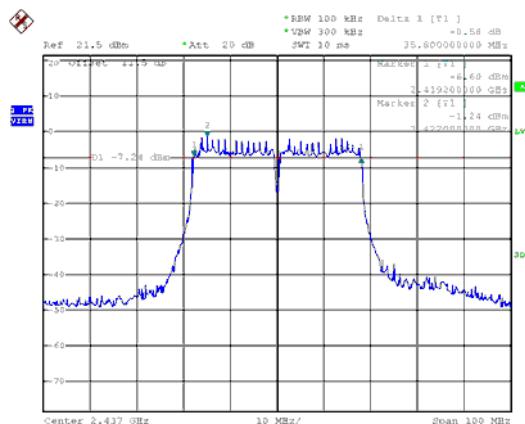

CH11

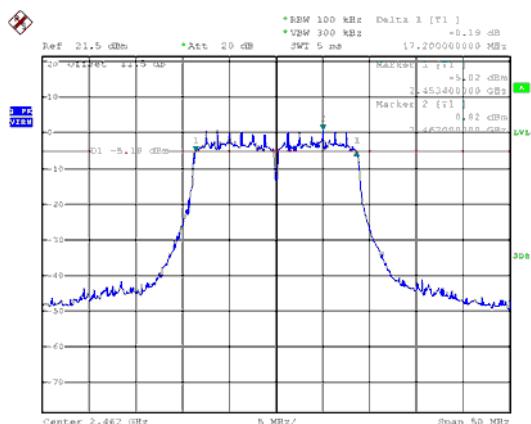


CH09

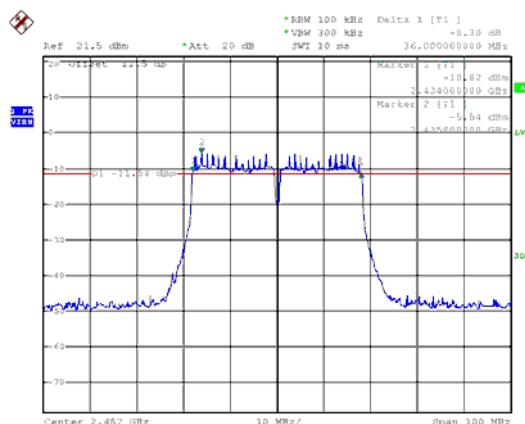




ANT B


Modulation Type: 802.11b
CH01

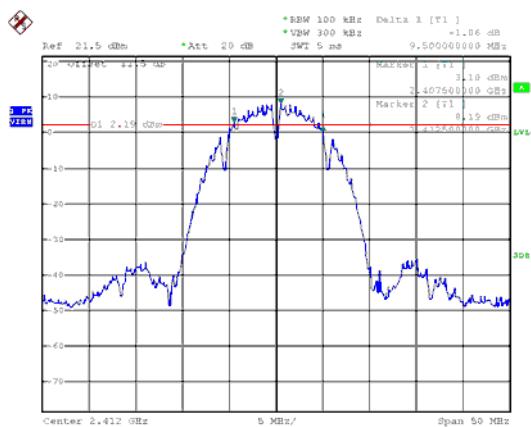


Modulation Type: 802.11g
CH01

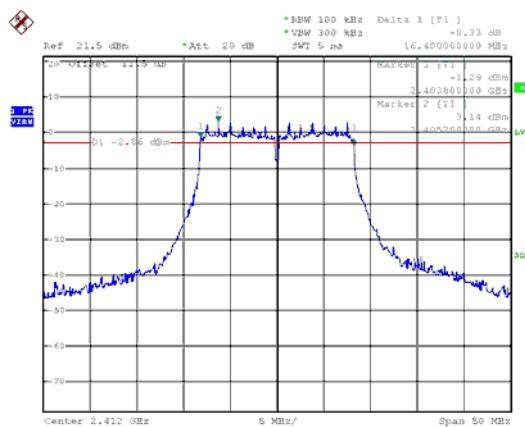


CH06

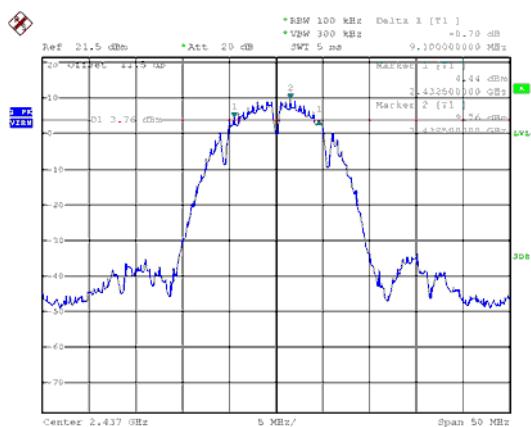


CH06

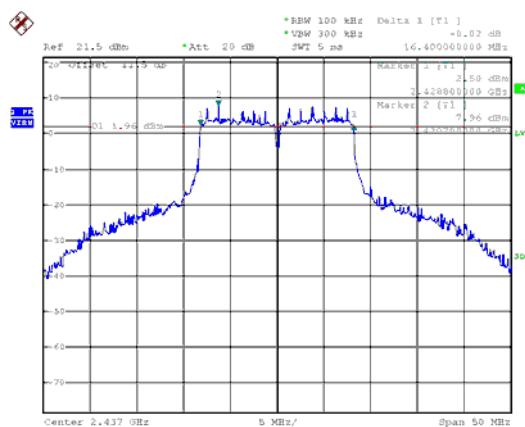

CH11

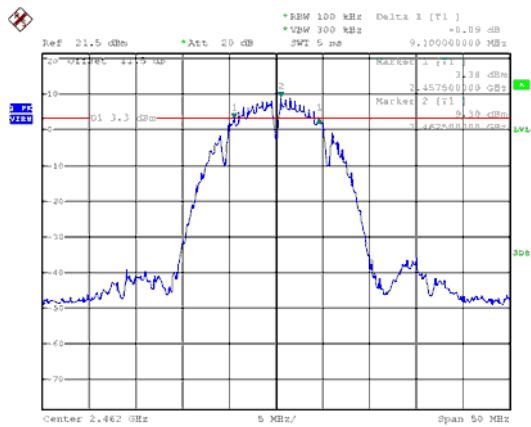


CH11

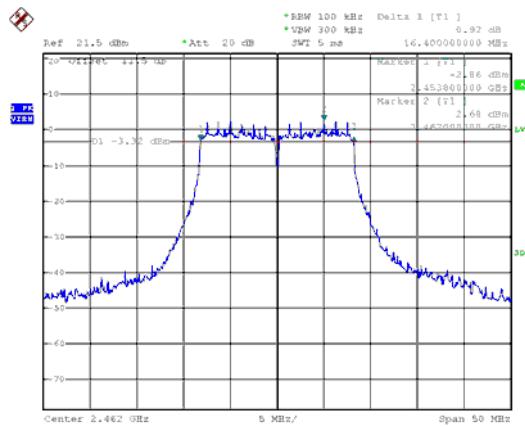




ANT B


Modulation Type: 802.11n HT20
CH01

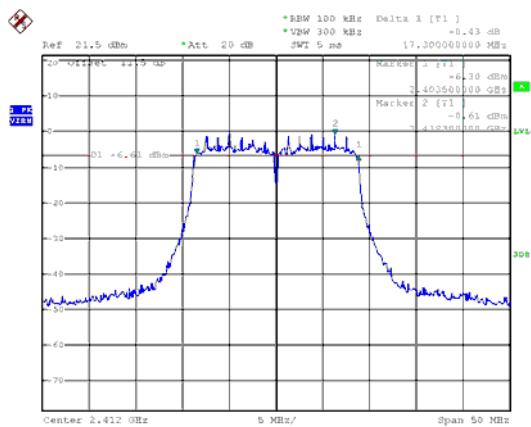


Modulation Type: 802.11n HT40
CH03

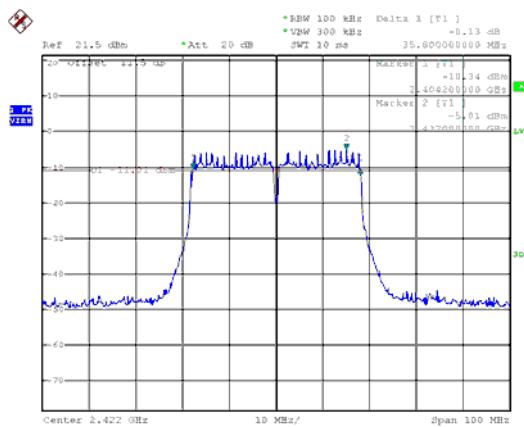


CH06

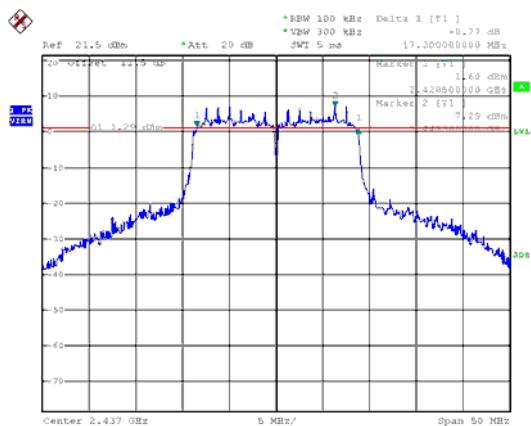


CH06

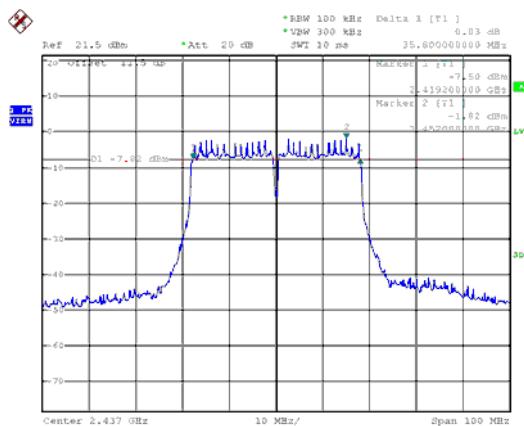

CH11

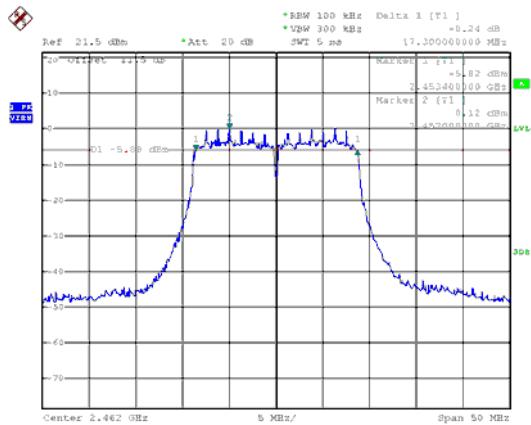

CH09

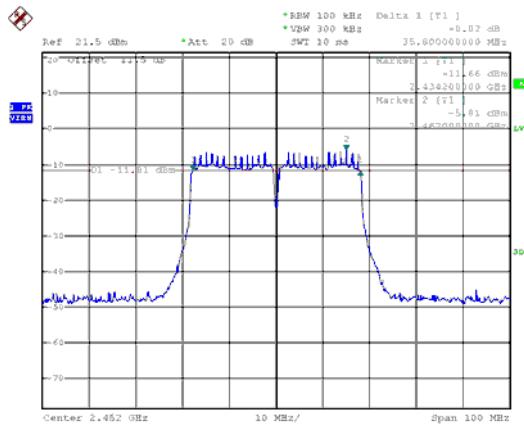



10. Maximum Peak and Average Output Power

10.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Conducted(peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
			ANT A	ANT B			
11b	1	2412	19.48	19.12	22.31	170.374	30.00
	6	2437	20.35	20.13	23.25	211.431	30.00
	11	2462	19.77	19.88	22.84	192.117	30.00
11g	1	2412	22.42	21.98	25.22	332.343	30.00
	6	2437	24.53	24.19	27.37	546.214	30.00
	11	2462	21.07	21.13	24.11	257.656	30.00
11n HT20	1	2412	19.52	19.15	22.35	171.761	30.00
	6	2437	24.60	24.32	27.47	558.799	30.00
	11	2462	19.88	19.93	22.92	195.676	30.00
11n HT40	3	2422	19.12	18.35	21.76	150.049	30.00
	6	2437	21.18	21.08	24.14	259.453	30.00
	9	2452	17.53	16.89	20.23	105.489	30.00



Modulation Type	Channel	Frequency (MHz)	Conducted(AV) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
			ANT A	ANT B			
11b	1	2412	16.68	16.32	19.51	89.413	NA
	6	2437	17.83	17.55	20.70	117.559	NA
	11	2462	17.18	17.36	20.28	106.690	NA
11g	1	2412	14.81	14.03	17.45	55.562	NA
	6	2437	18.32	18.24	21.29	134.601	NA
	11	2462	13.34	13.18	16.27	42.374	NA
11n HT20	1	2412	11.06	10.58	13.84	24.193	NA
	6	2437	17.48	17.73	20.62	115.268	NA
	11	2462	11.59	11.32	14.47	27.973	NA
11n HT40	3	2422	10.06	9.33	12.72	18.709	NA
	6	2437	12.28	11.95	15.13	32.572	NA
	9	2452	8.58	7.86	11.25	13.320	NA

Note: Average power is for reference only.



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

11.3 Test Setup Layout





11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A	ANT B				
11b	1	2412	-5.44	-5.44	-2.43	0.00	-2.43	8.00
	6	2437	-5.47	-5.95	-2.69	0.00	-2.69	8.00
	11	2462	-5.38	-5.73	-2.54	0.00	-2.54	8.00
11g	1	2412	-9.35	-10.01	-6.66	0.00	-6.66	8.00
	6	2437	-6.24	-5.55	-2.87	0.00	-2.87	8.00
	11	2462	-10.92	-11.13	-8.01	0.00	-8.01	8.00
11n HT20	1	2412	-13.57	-12.92	-10.22	0.00	-10.22	8.00
	6	2437	-5.32	-5.72	-2.51	0.00	-2.51	8.00
	11	2462	-13.26	-13.93	-10.57	0.00	-10.57	8.00
11n HT40	3	2422	-18.55	-18.85	-15.69	0.00	-15.69	8.00
	6	2437	-15.34	-15.61	-12.46	0.00	-12.46	8.00
	9	2452	-18.91	-19.87	-16.35	0.00	-16.35	8.00




ANT A

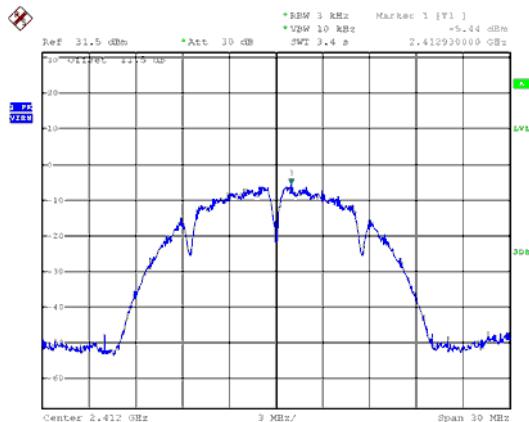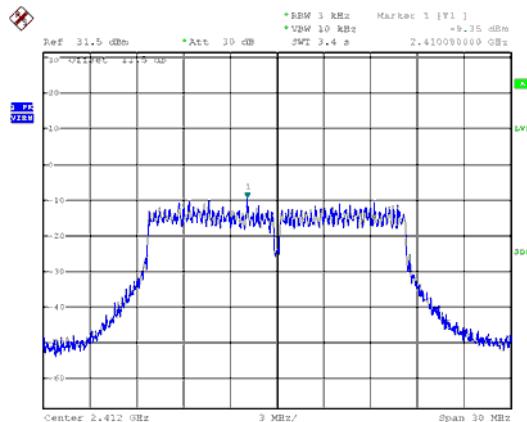Modulation Type: 802.11b
CH01Modulation Type: 802.11g
CH01


CH06

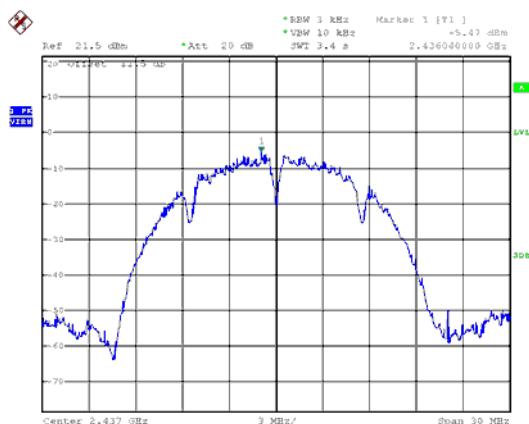


CH06

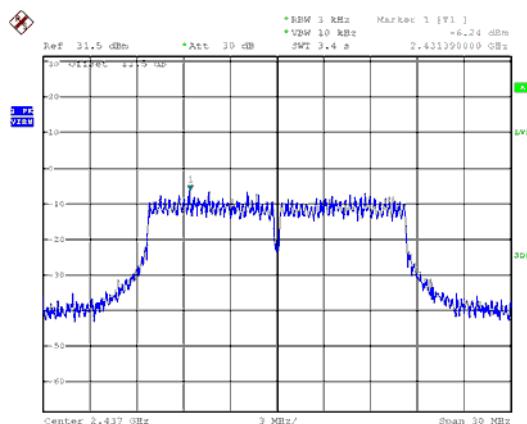

CH11


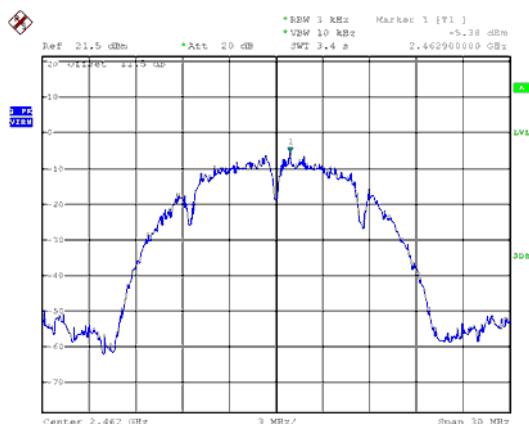


CH11

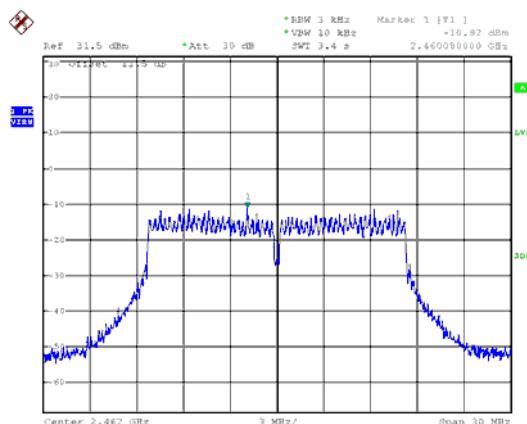





ANT A

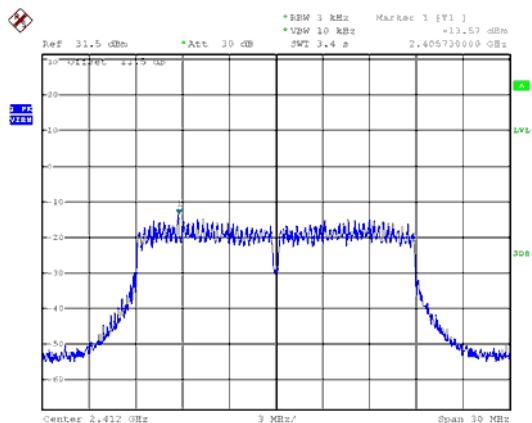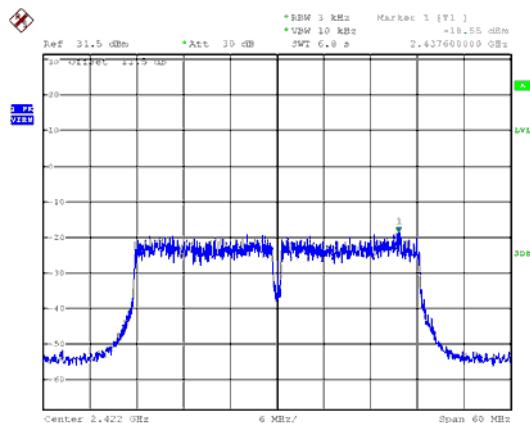Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

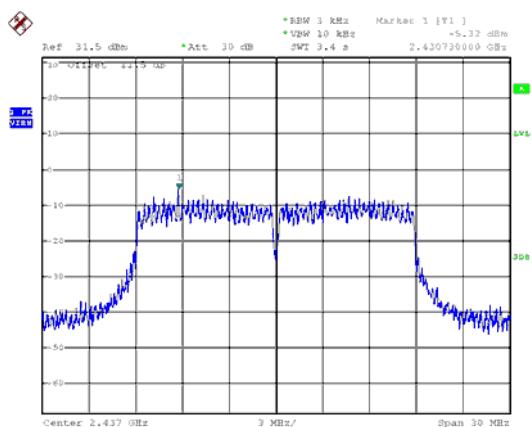


CH06

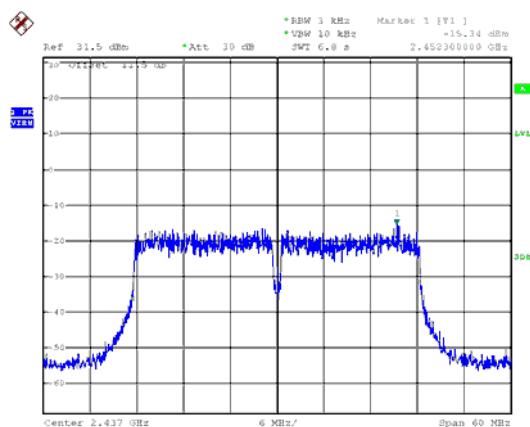

CH11


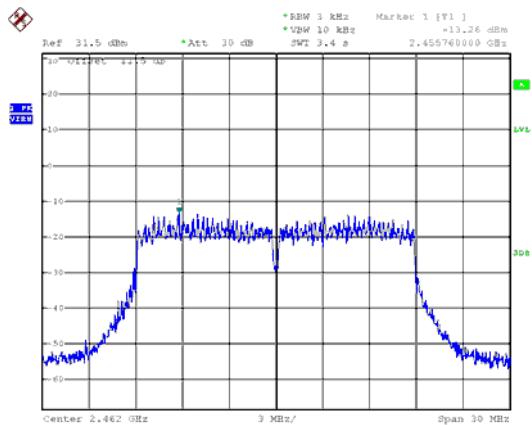


CH09

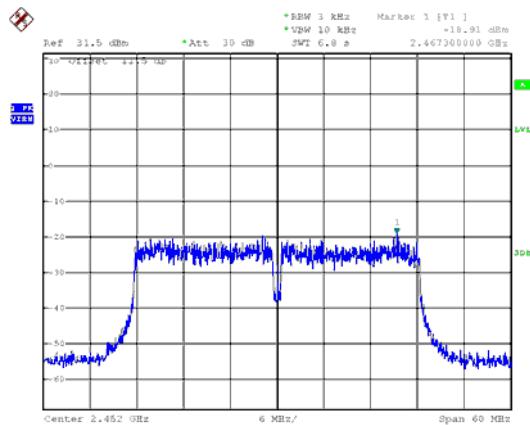





ANT B

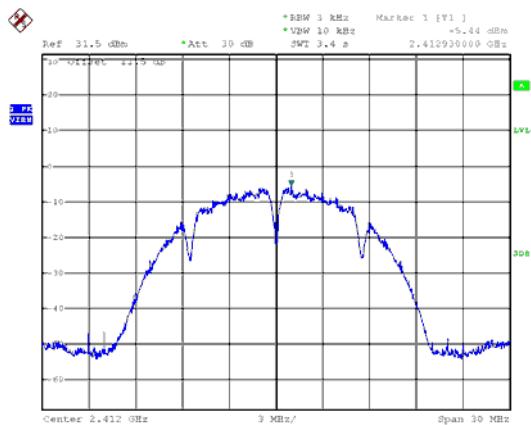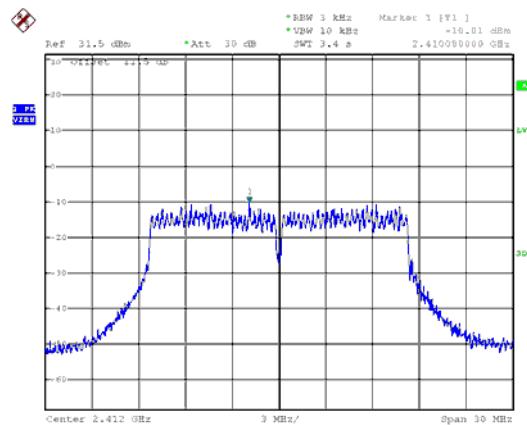Modulation Type: 802.11b
CH01Modulation Type: 802.11g
CH01


CH06

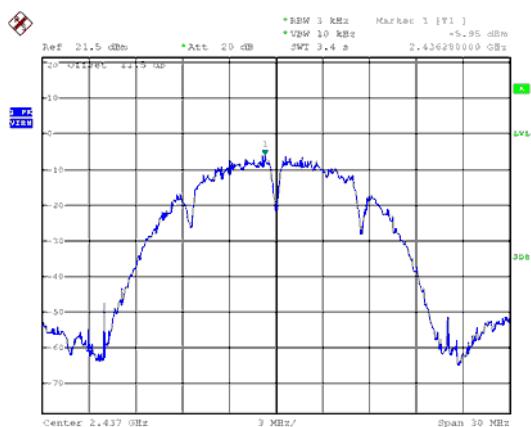


CH06

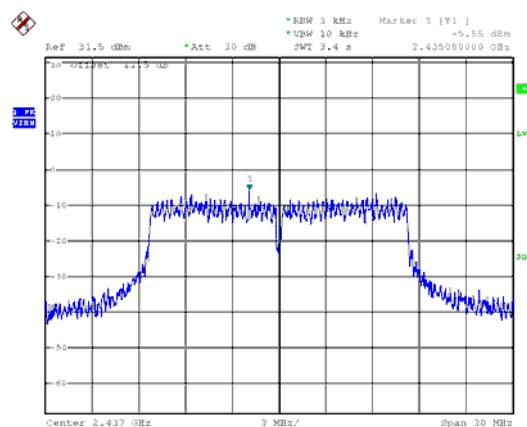

CH11


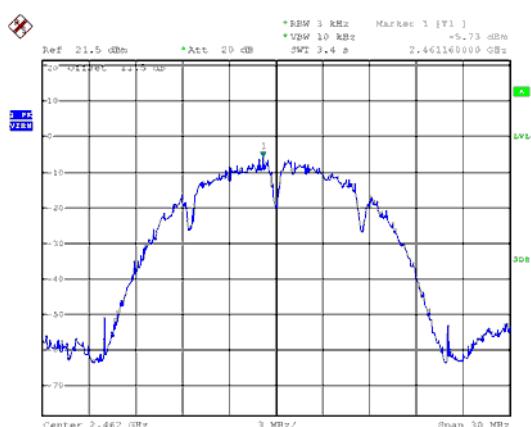


CH11

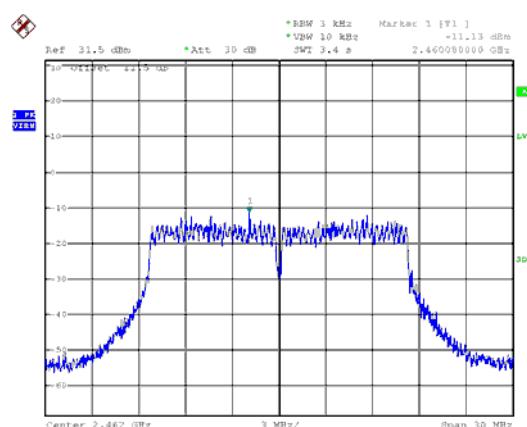





ANT B

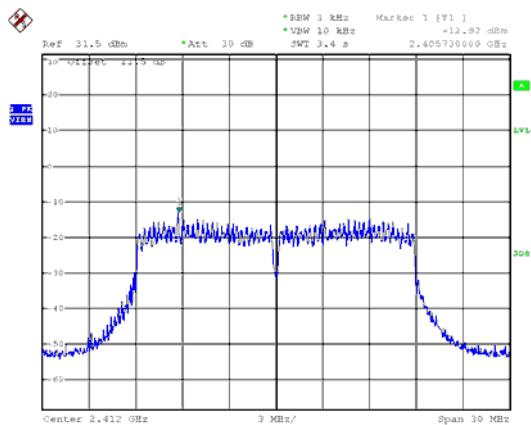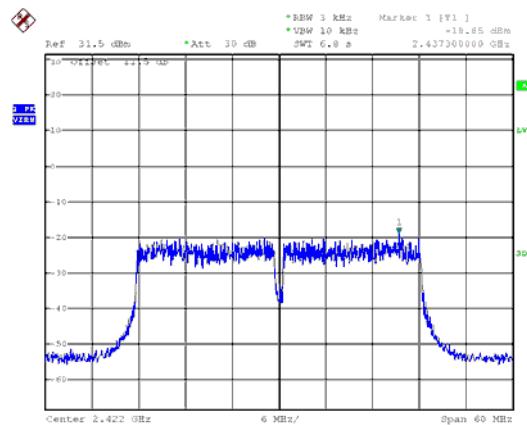Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

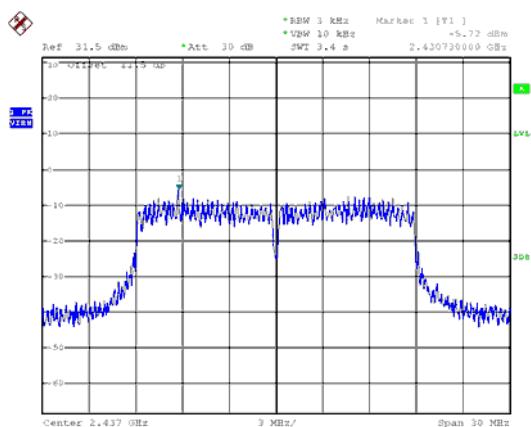

CH06

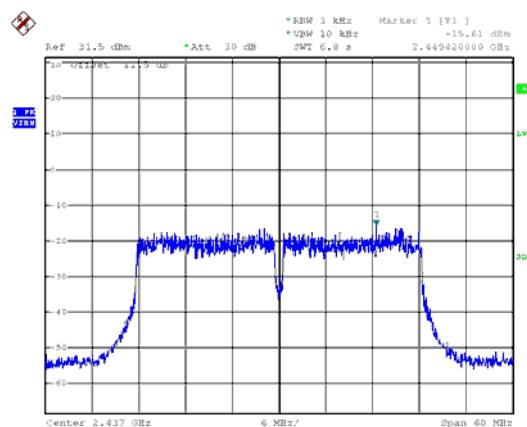

CH11

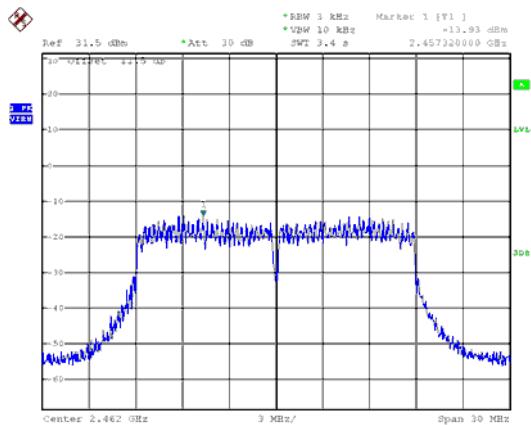

CH09

