

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-DO



Independent ETSI
compliance test house



Accredited Bluetooth[®] Test Facility (BQTF)

Test report no.: 2_3470-01-02/04
FCC Part 15.247 / CANADA RSS-210
FCC ID: BJIOH0003
IC:

B-SX4T-GS10-QQ

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
D-66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 598-9075

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant´s details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW	5
1.3.3 Additional EUT information For IC Canada (appendix 2).....	6
1.3.4 EUT operating modes	7
1.3.5 Extreme conditions testing values.....	7
2. TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	8
3. RF MEASUREMENT TESTING	9
3.1 DESCRIPTION OF TEST SET-UP.....	9
3.1.1 Radiated measurements	9
3.1.2 Conducted measurements	9
3.2 REFERENCED DOCUMENTS.....	10
3.3 ADDITIONAL COMMENTS	10
3.4 ANTENNA GAIN	10
3.6 NUMBER OF HOPPING CHANNELS §15.247(A)(1).....	12
3.7 TIME OF OCCUPANCY (DWELL TIME) §15.247(A)(1)(I).....	13
3.8 POWER SPECTRAL DENSITY (HYBRID SYSTEM IN INQUIRY MODE/PAGE SCAN) §15.247(E)	15
3.9 SPECTRUM BANDWIDTH OF A FHSS SYSTEM / 20dB BANDWITH §15.247(A)(1)(I)	16
3.10 MAXIMUM OUTPUT POWER (CONDUCTED) § 15.247 (B) (2)	18
3.11 MAX. PEAK OUTPUT POWER (RADIATED) § 15.247 (B) (2).....	20
3.12 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (D).....	21
3.13 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	25
3.14 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) § 15.247 (D).....	30
3.15 SPURIOUS EMISSIONS > 30 MHZ- RADIATED (TRANSMITTER) § 15.247 (D)	34
3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) § 15.109.....	38
3.17 SPURIOUS EMISSIONS < 30 MHZ - TRANSMITTER RADIATED § 15.209	40
3.17 SPURIOUS EMISSIONS < 30 MHZ - TRANSMITTER RADIATED § 15.209	40
3.18 CONDUCTED EMISSIONS <30 MHZ § 15.107/207	41
4 PHOTOGRAPHS	45


ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. TTI-P-G 081/94-DO Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Joerg WarkenMichael Berg / Dirk Hausknecht Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

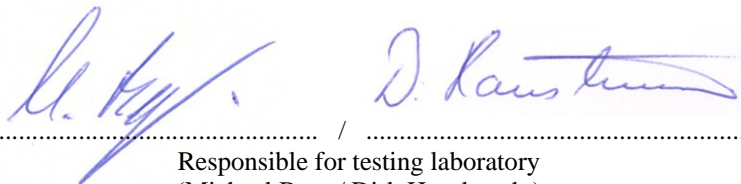


..... /

Responsible for testing laboratory
(Michael Berg / Dirk Hausknecht)

1.1.2 Organizational items

Reference No.:	2_3470-01-02/04
Order No.:	
Responsible for test report and project leader:	Michael Berg / Dirk Hausknecht
Receipt of EUT:	2005-03-08
Date(s) of test:	2005-03-30 to 2005-03-31
Date of report:	2005-03-31
Number of report pages:	57
Number of diagram pages (annex):	

Version of template:	1.8

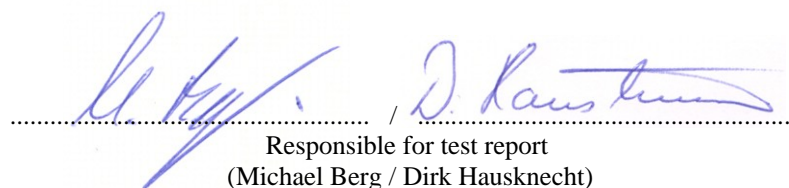

..... /

Responsible for test report
(Michael Berg / Dirk Hausknecht)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Toshiba TEC Corporation
Address:	570 Ohitop, Ohito-cho, Tagat-gun Shizuka-ken 410-2392 Japan
Contact person:	Mr. Makoto Sugiyama Phone: +81 558-76-9512 Fax: +81 558-76-9844 email: Makato_Sugiyama@tishibatec.co.jp

1.2 Administrative data of manufacturer / member

Manufacturer's name:	AWID
Address:	382 Route 59, Section 292, Monsey Monsey NY 10952 USA

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
B-SX4T-GS10-QQ					
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
ISM 902 – 928 MHz	FHSS	50	Print antenna	110 – 120V AC	

Max. power radiated: -25.0 dBm

Max. power conducted: 27.83 dBm

FCC ID:

IC:

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						
3						
4						

1.3.3 Additional EUT information For IC Canada (appendix 2)

Company Number:	
Model Number:	
Product Name:	B-SX4T-GS10-QQ
Manufacturer:	TOSHIBA TEC Corporation
Tested to Radio Standards Specification (RSS) No.:	RSS-210
Open Area Test Site Industry Canada Number:	3463
Frequency Range (or fixed frequency) [MHz]:	902 - 928 MHz
RF: Power [W] (max):	Rad. ERP: 0.003mW Conducted : 606,7 mW
Field Strength [dB μ V/m in 3m]:	72.5
Occupied Bandwidth (99% BW) [kHz]:	352 kHz
Type of Modulation:	ASK
Emission Designator (TRC-43):	350K0AXD / 24M2FXD (FHSS)
Transmitter Spurious (worst case) [μ V/m in 3m]:	48.4
Receiver Spurious (worst case) [μ V/m in 3m]:	38.0

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature: |



Date: 2005-03-31

Testengineer : Michael Berg

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the testplan

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	+23 / 43
Low Temperature	T _{low}	°C	
High Temperature	T _{high}	°C	
Nominal Power Source	V _{nom}	V	110
Low Power Source	V _{low}	V	
High Power Source	V _{high}	V	

Type of powersource: V AC

Deviations from this values are reported in chapter 2

2. Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS		

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247(a1)	Carrier frequency separation	Yes			
§15.247(a1)	Number of hopping channels	Yes			
§15.247(a1 iii)	Time of occupancy (dwell time)	Yes			
§15.247(d)	Power Spectral density (Hybrid system in Inquiry mode/Page scan)			X	
§15.247(a1)	Spectrum Bandwidth of a FHSS System / 20dB Bandwith	Yes			
§ 15.247 (b) (1)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (1)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§ 15.247 (c) (1)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.247 (c) (1)	Spurious Emission - radiated (Transmitter) >30 MHz	Yes			
§ 15.109	Spurious Emissions - radiated (Receiver)	Yes			
§ 15.209	Spurious Emissions - radiated (Transmitter) <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3. RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna


1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by airlink using signaling antenna.


3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal path is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

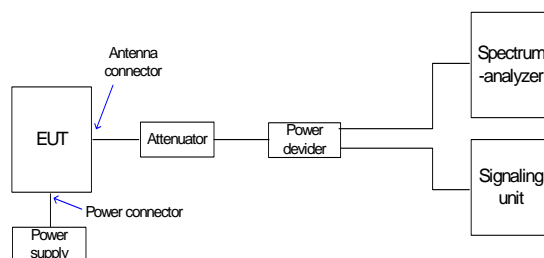

3.5 Carrier frequency separation §15.247(a1)

Plot 1 of 1:

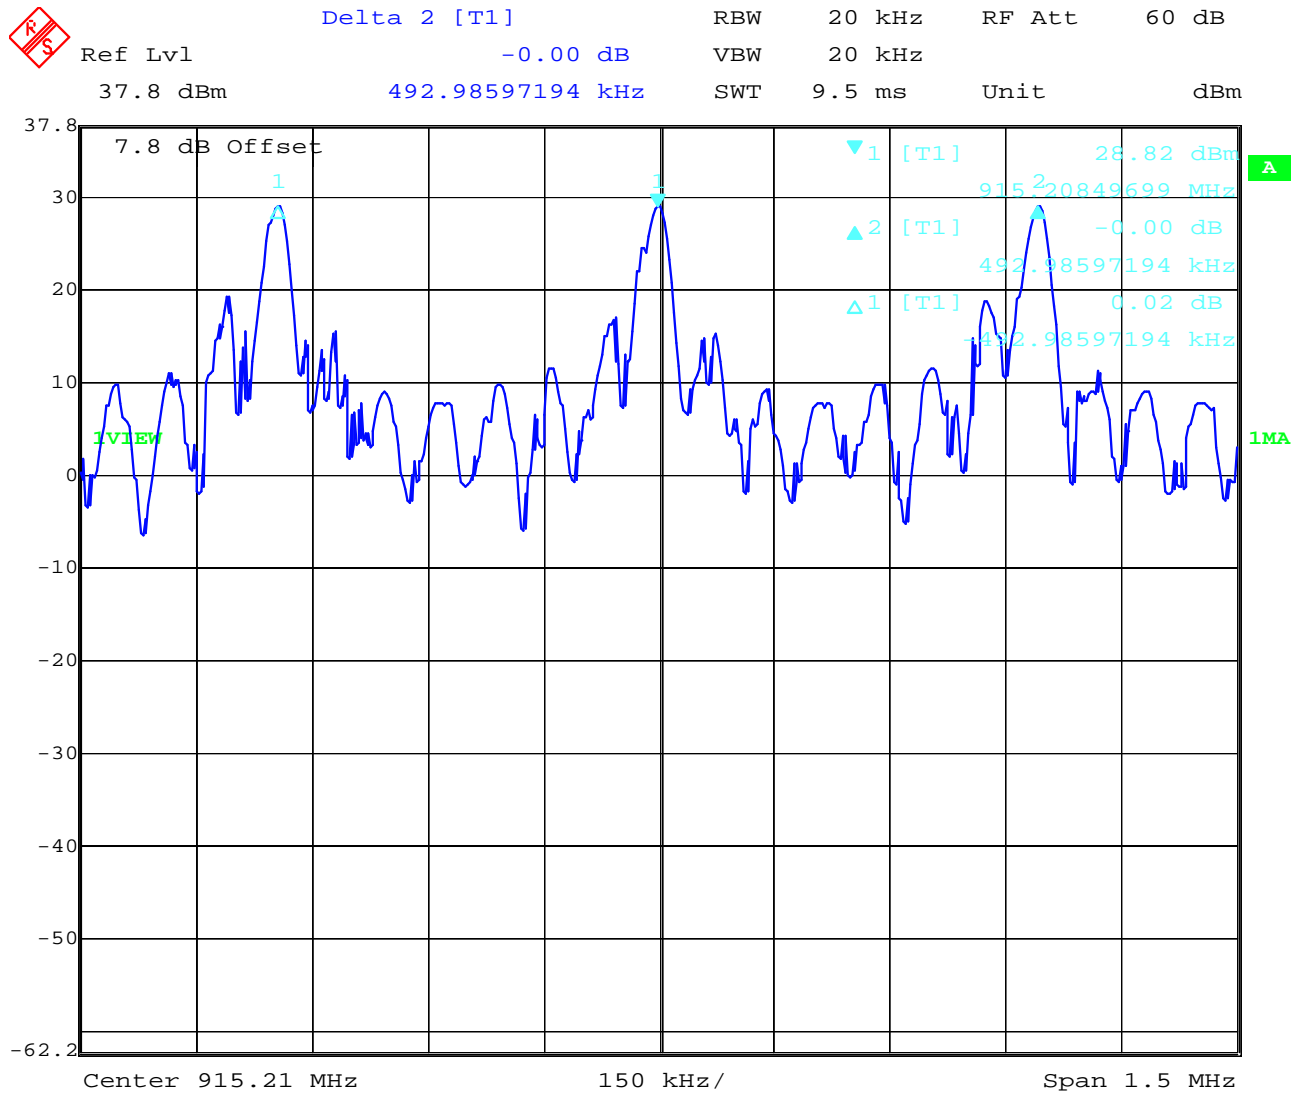

Date: 31.MAR.2005 10:20:56


Result : Channel separation is: ~ 493 kHz

Limits :

Under normal test conditions only	Minimum 25 kHz or 20 dB Bandwidth of the hopping system
-----------------------------------	---

3.6 Number of hopping channels §15.247(a)(1)

Plot 1 of 2:

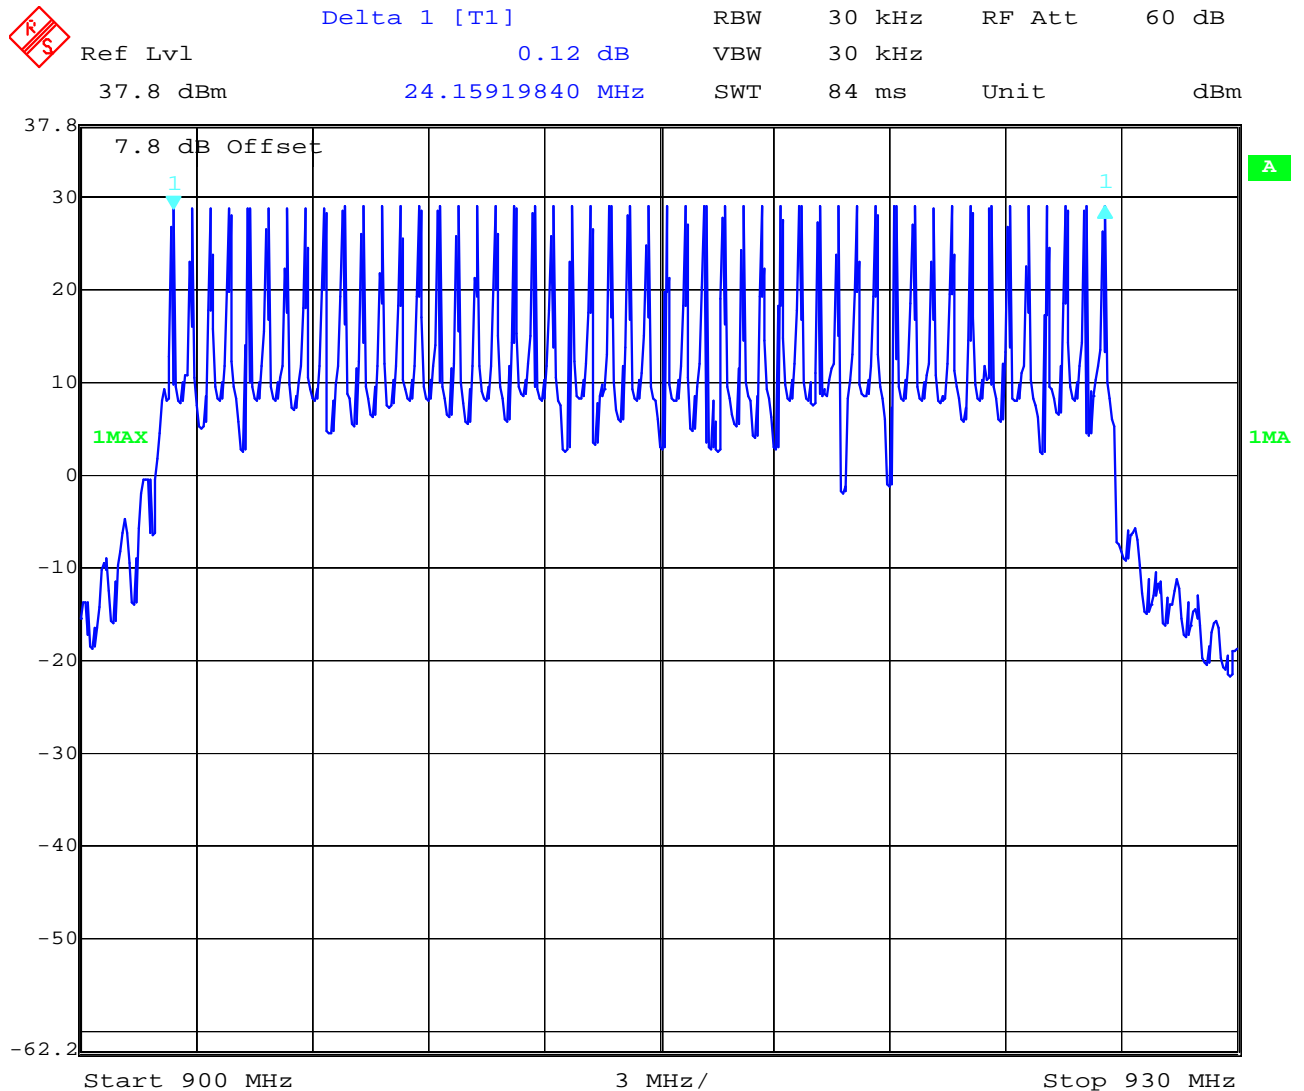

Date: 31.MAR.2005 10:24:50

Result : The number of hopping channels is: 50


Limits :

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.7 Time of occupancy (dwell time) §15.247(a)(1)(i)

On-Time

	Delta 1 [T1]	RBW	1 MHz	RF Att	60 dB
Ref Lvl	-0.11 dB	VBW	1 MHz		
37.8 dBm	304.609218 ms	SWT	1 s	Unit	dBm

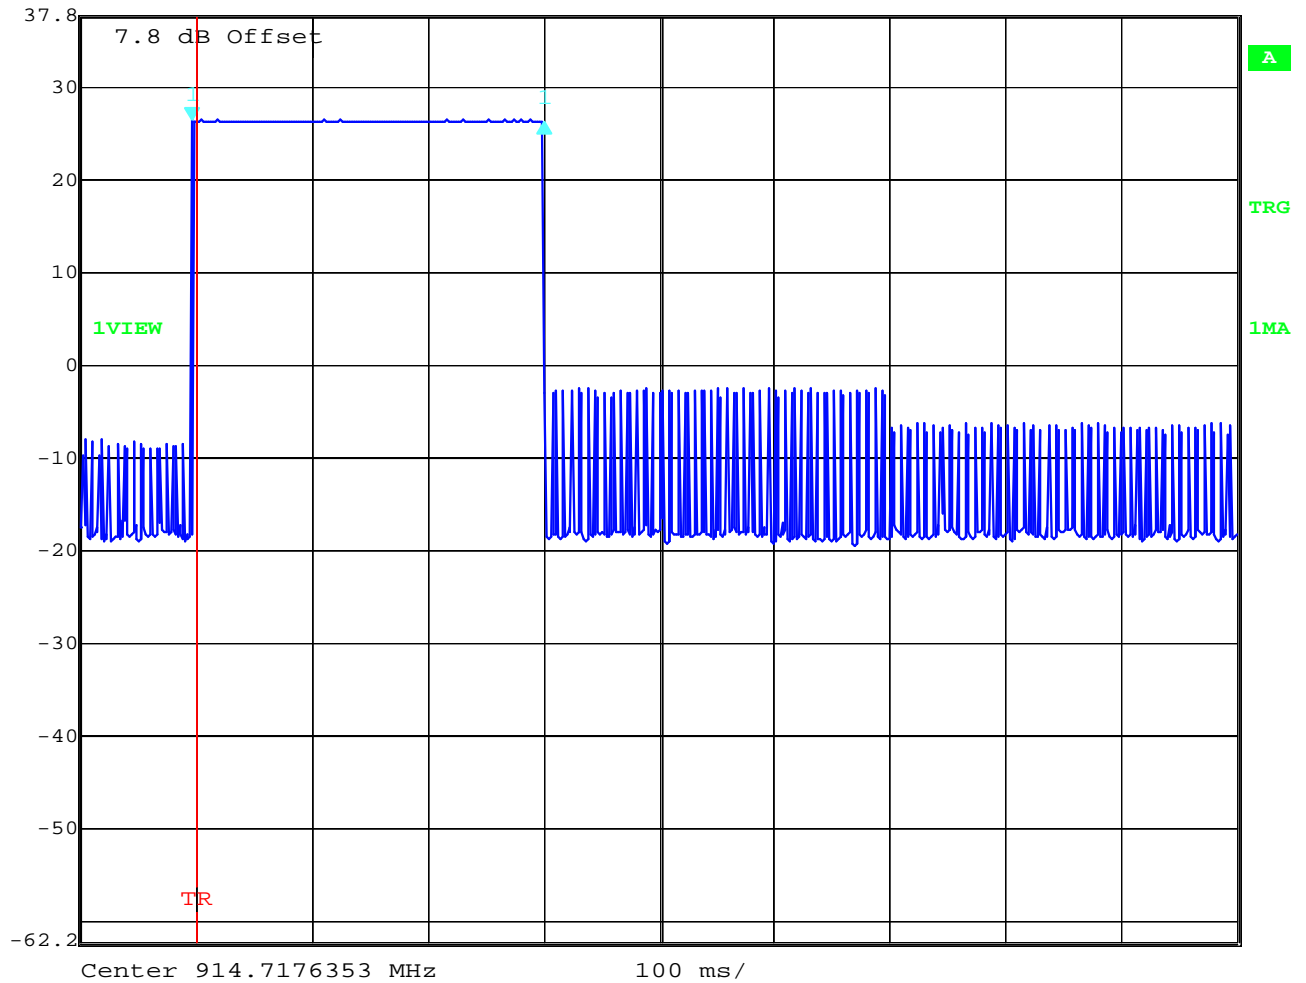

Date: 31.MAR.2005 10:47:33

the On-Time is : 305 ms

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 14 of 57

Time of occupancy



Delta 1 [T1]

RBW 1 MHz RF Att 60 dB

Ref Lvl 0.00 dB

VBW 1 MHz


37.8 dBm

15.035060 s

SWT 25 s

Unit

dBm

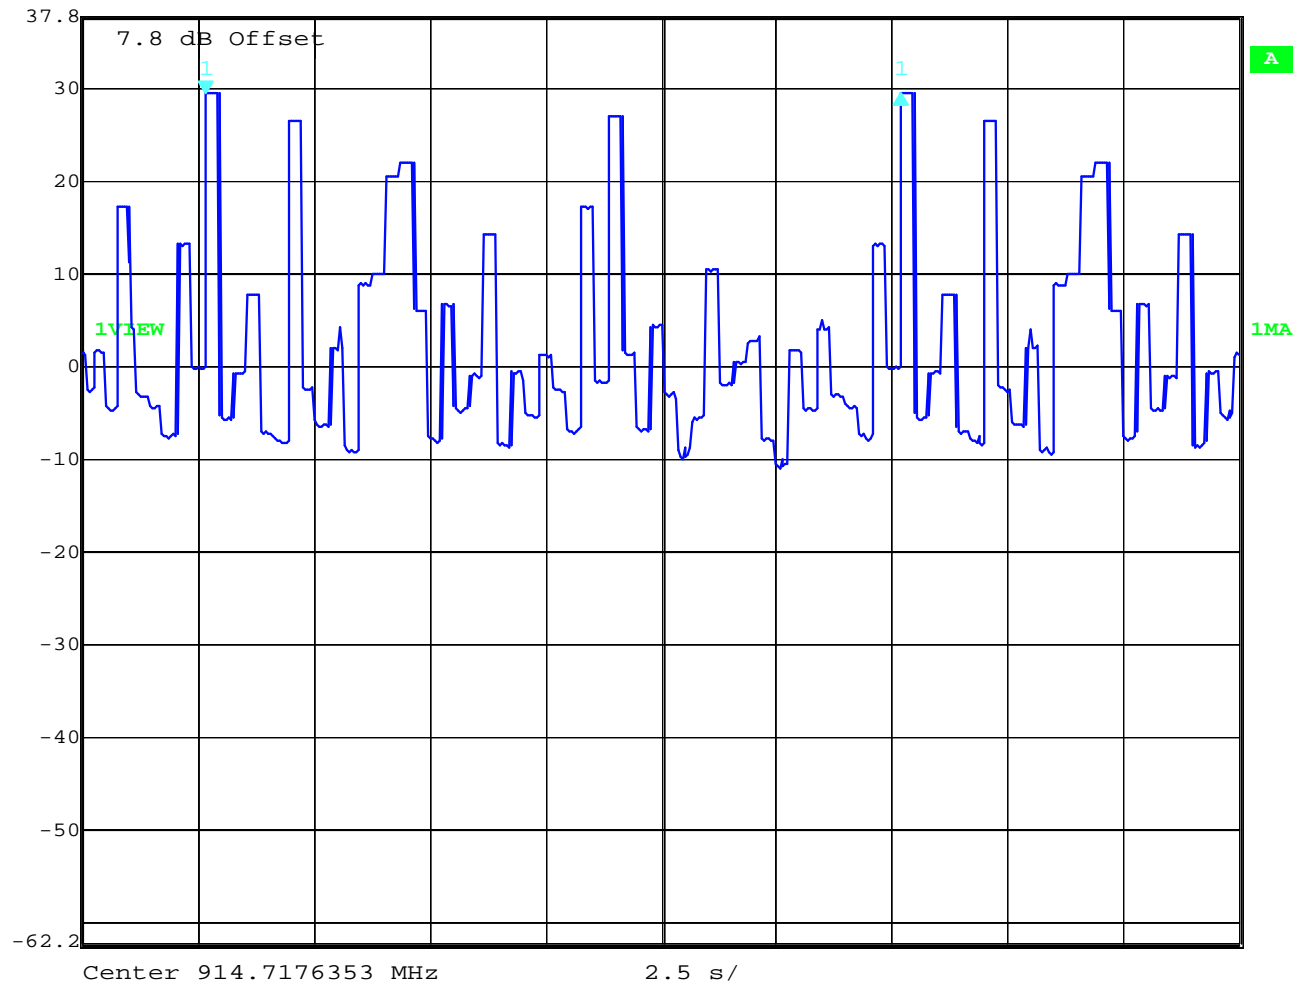

Date: 31.MAR.2005 11:06:45

The channel is occupied each 15sec for 305 ms

Results : PASS

Limits :

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e)

Plot 1 of 1:

Measurement not applicable

Result: Power density : - dBm/Hz = - dBm / 3 KHz


Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band
-----------------------------------	---


3.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwith §15.247(a)(1)(i)

Plot 1 of 3

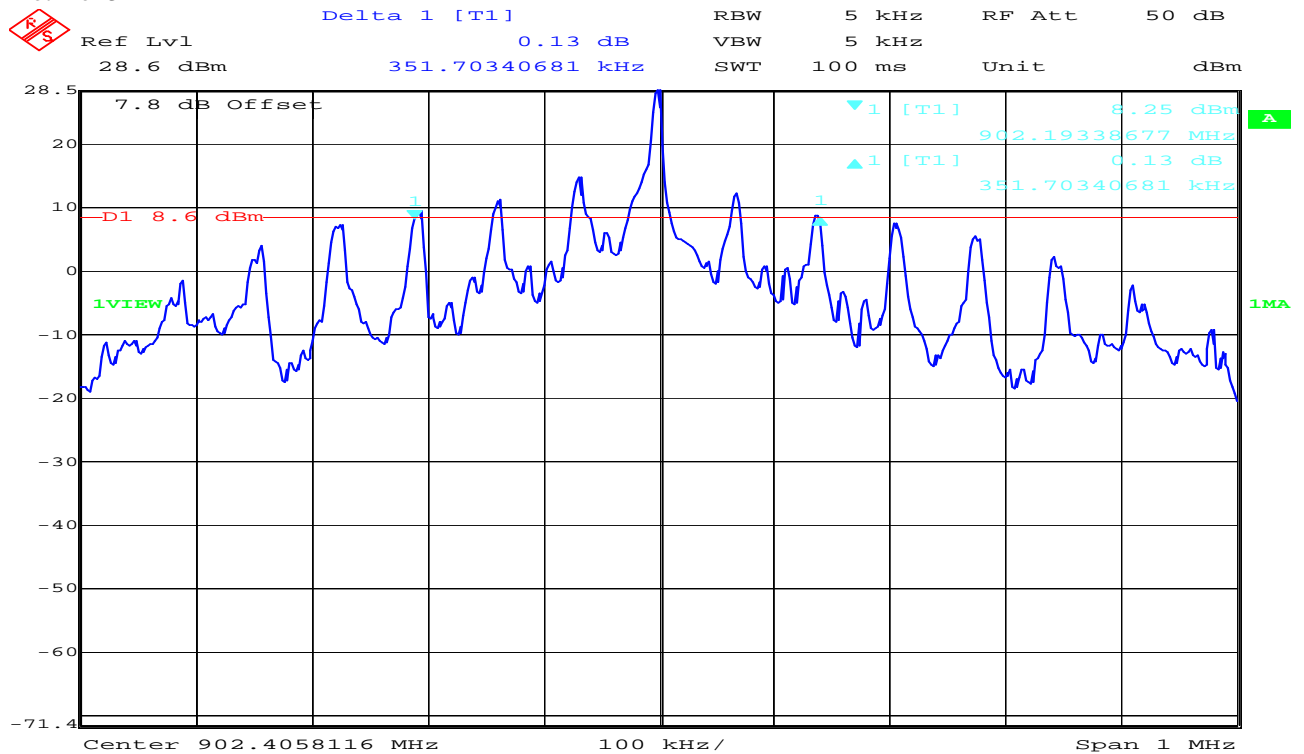


Date: 31.MAR.2005 11:14:08

Plot 2 of 3

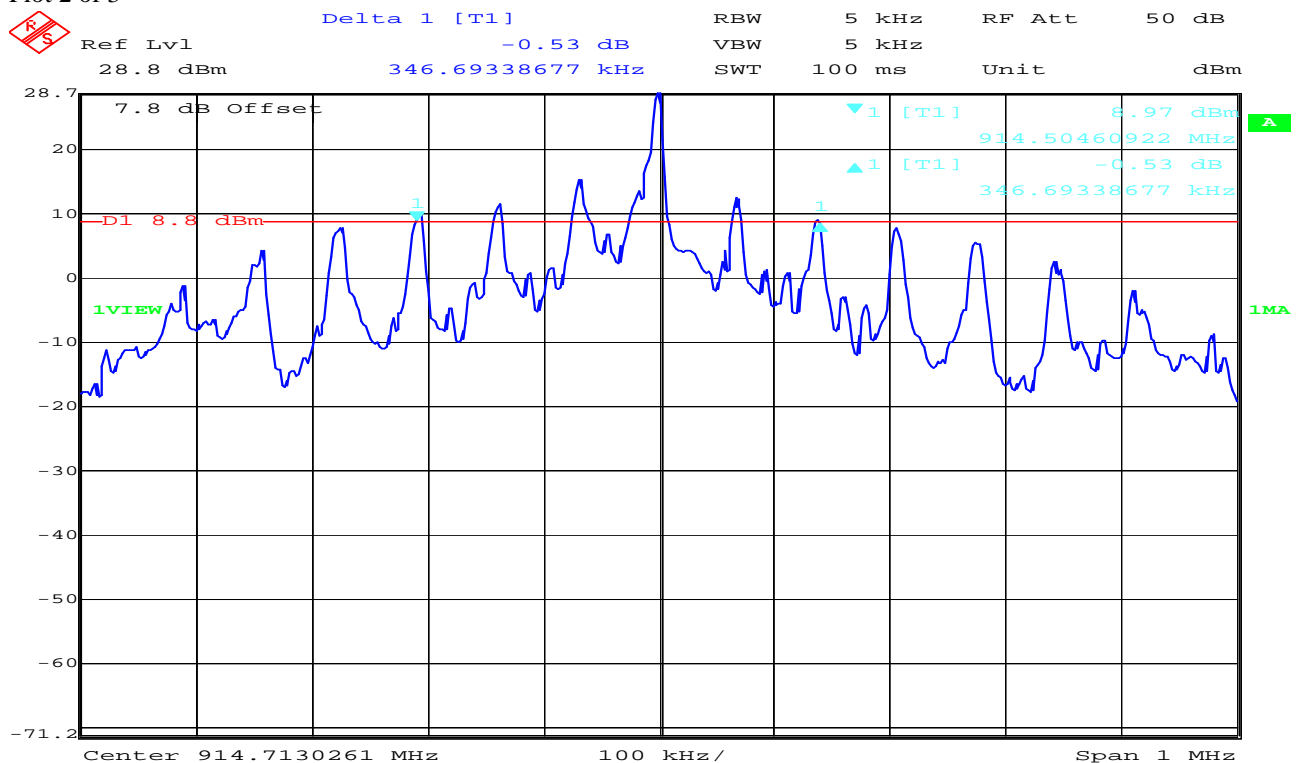

Date: 31.MAR.2005 11:12:19

Plot 3 of 3

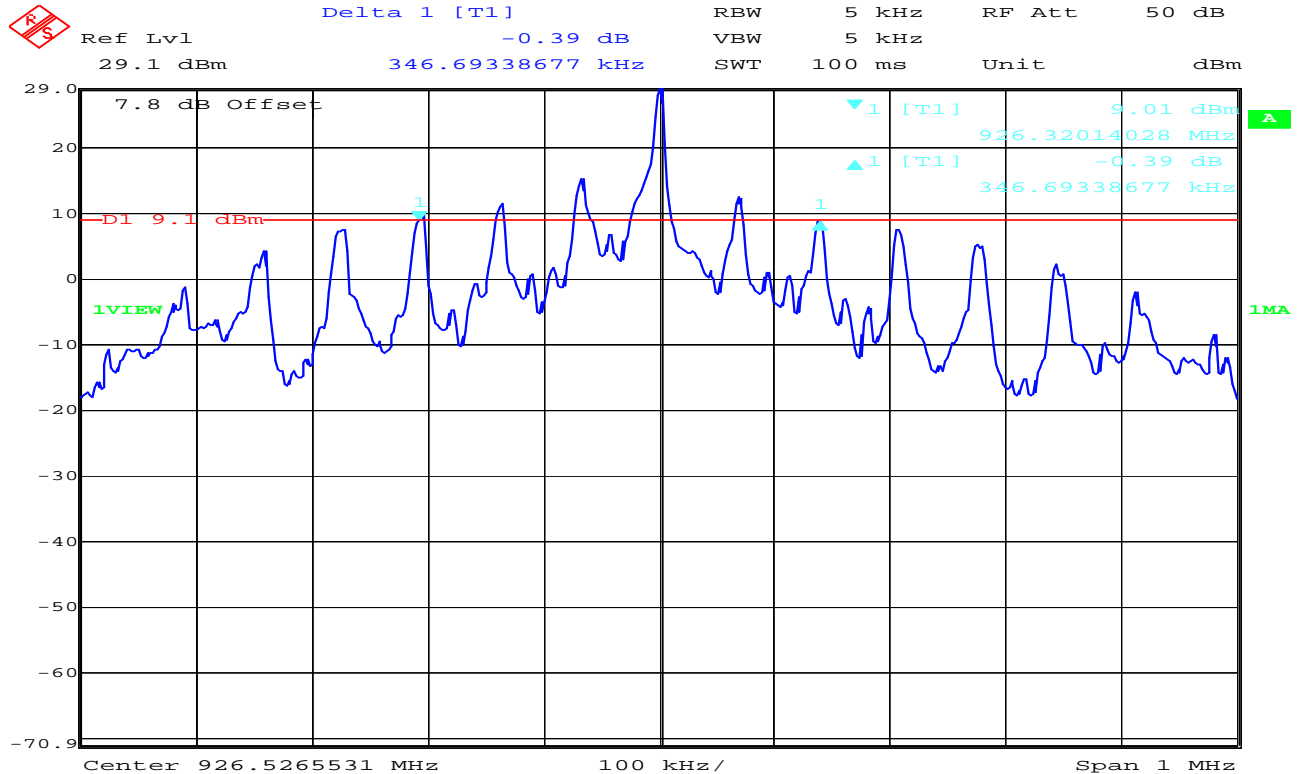

Date: 31.MAR.2005 11:10:28

Results:

Test conditions		20 dB BANDWIDTH [kHz]		
Frequency [MHz]		902.4	914.7	926.5
T _{nom}	V _{nom}	351.703	346.693	346,693
Measurement uncertainty		±1kHz		


RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

Limits :

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


3.10 Maximum output power (conducted) § 15.247 (b) (2)

Plot 1 of 3

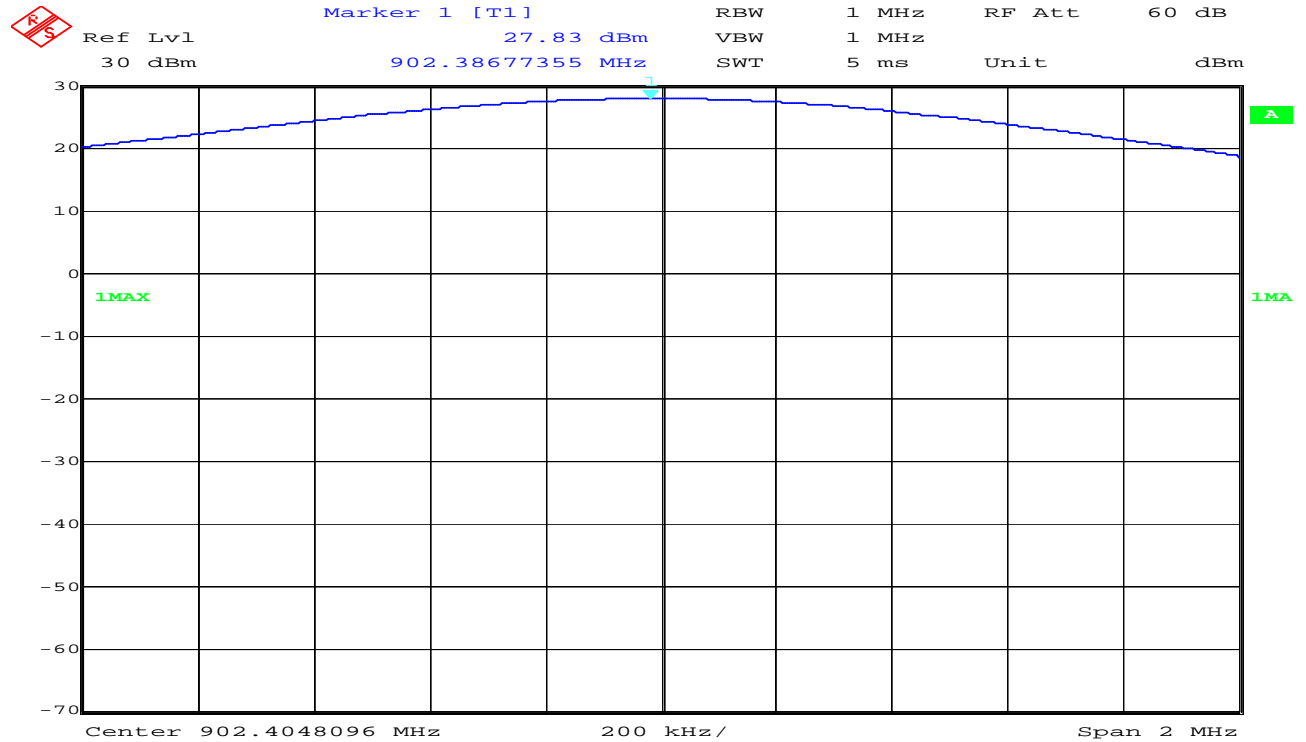

Date: 31.MAR.2005 09:28:29

Plot 2 of 3

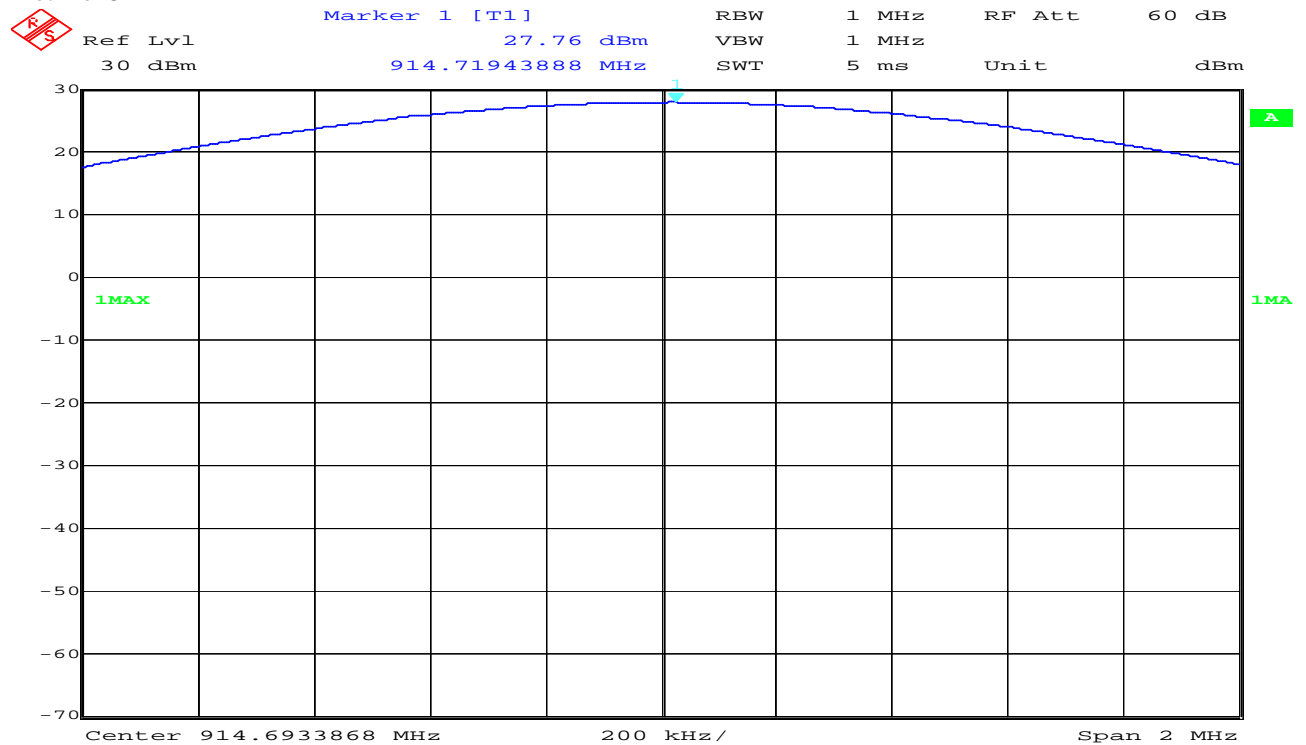

Date: 31.MAR.2005 09:32:09

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 19 of 57

Plot 3 of 3

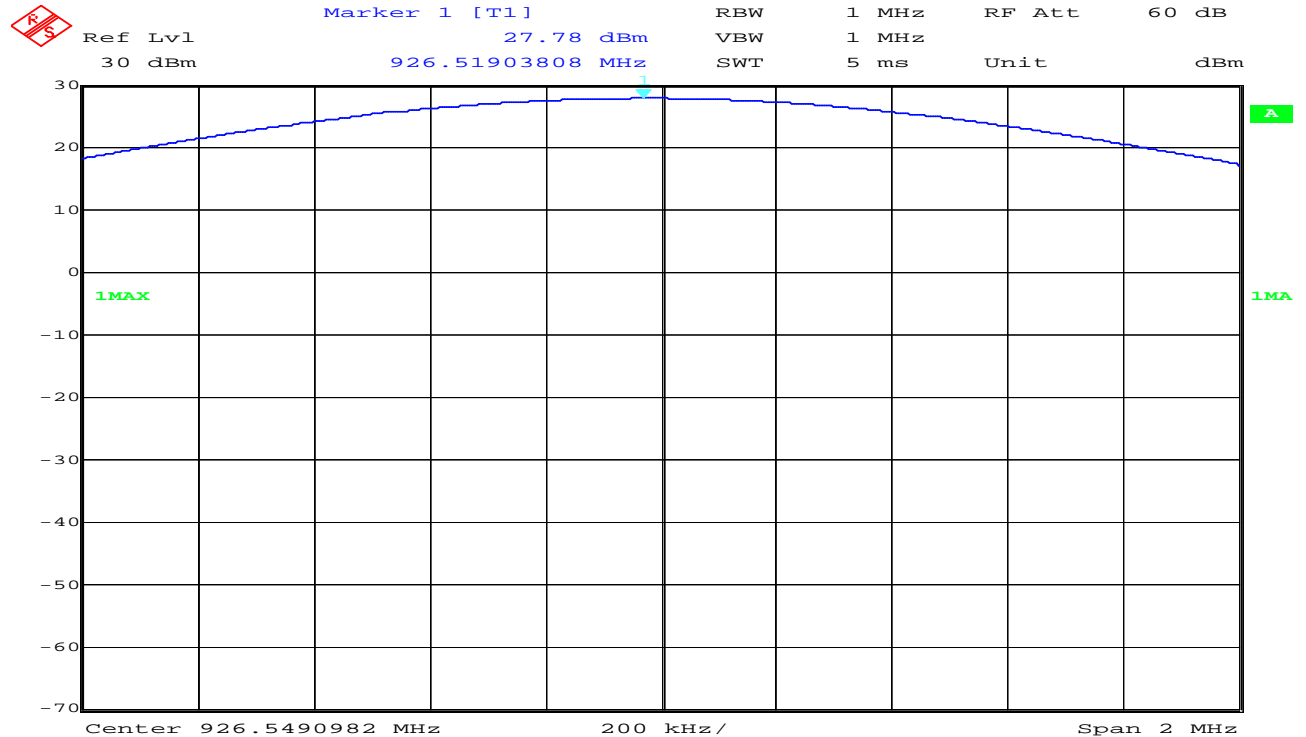

Date: 31.MAR.2005 09:30:55

Results:

Test conditions		Max. peak output power [dBm]					
Frequency [MHz]		902.4		914.7		926.5	
T _{nom}	V _{nom}	PK	27.83	PK	27.76	PK	27.78
Measurement uncertainty		±3dB					

RBW / VBW : 1 MHz

Limits:

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

3.11 Max. peak output power (radiated) § 15.247 (b) (2)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		902.4	914.7	926.5
T _{nom}	V _{nom}	-28.1	-25.0	-39.1
Measurement uncertainty		±3dB		

RBW / VBW : 3 MHz

Measured at a distance of 3m


Limits:

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

3.12 Band-edge compliance of conducted emissions §15.247 (d)

Plot 1 of 4 (hopping off, lowest frequency):

	Delta 1 [T1]	RBW	50 kHz	RF Att	50 dB
Ref Lvl	25.48 dB	VBW	50 kHz		
29 dBm	400.80160321 kHz	SWT	5 ms	Unit	dBm

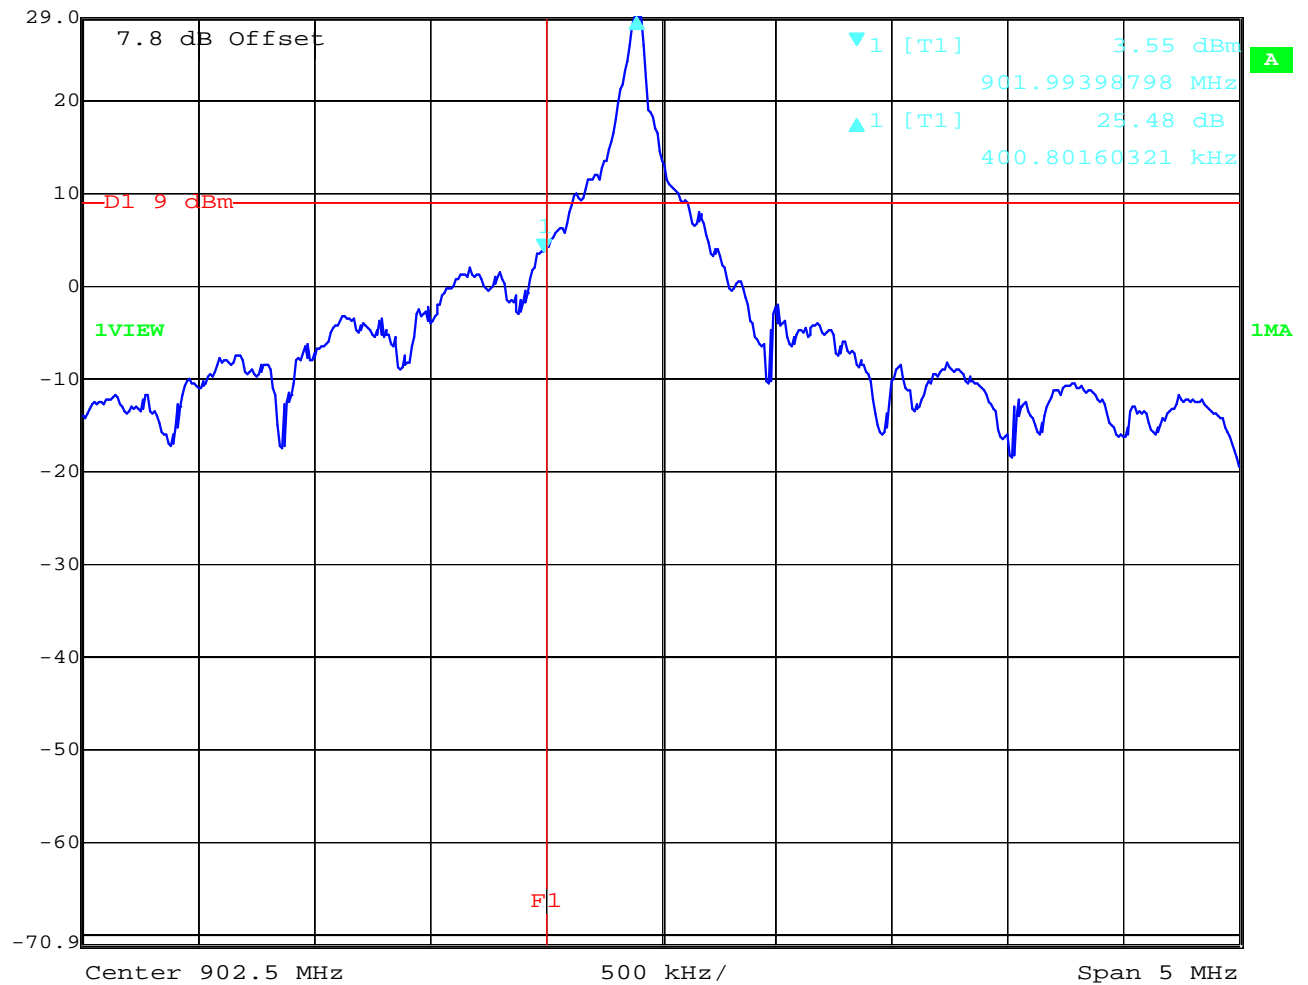

Date: 31.MAR.2005 10:06:31

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 22 of 57

Plot 2 of 4 (hopping on, lowest frequency):

	Delta 1 [T1]	RBW	50 kHz	RF Att	60 dB
Ref Lvl	25.45 dB	VBW	50 kHz		
37.8 dBm	420.84168337 kHz	SWT	5 ms	Unit	dBm

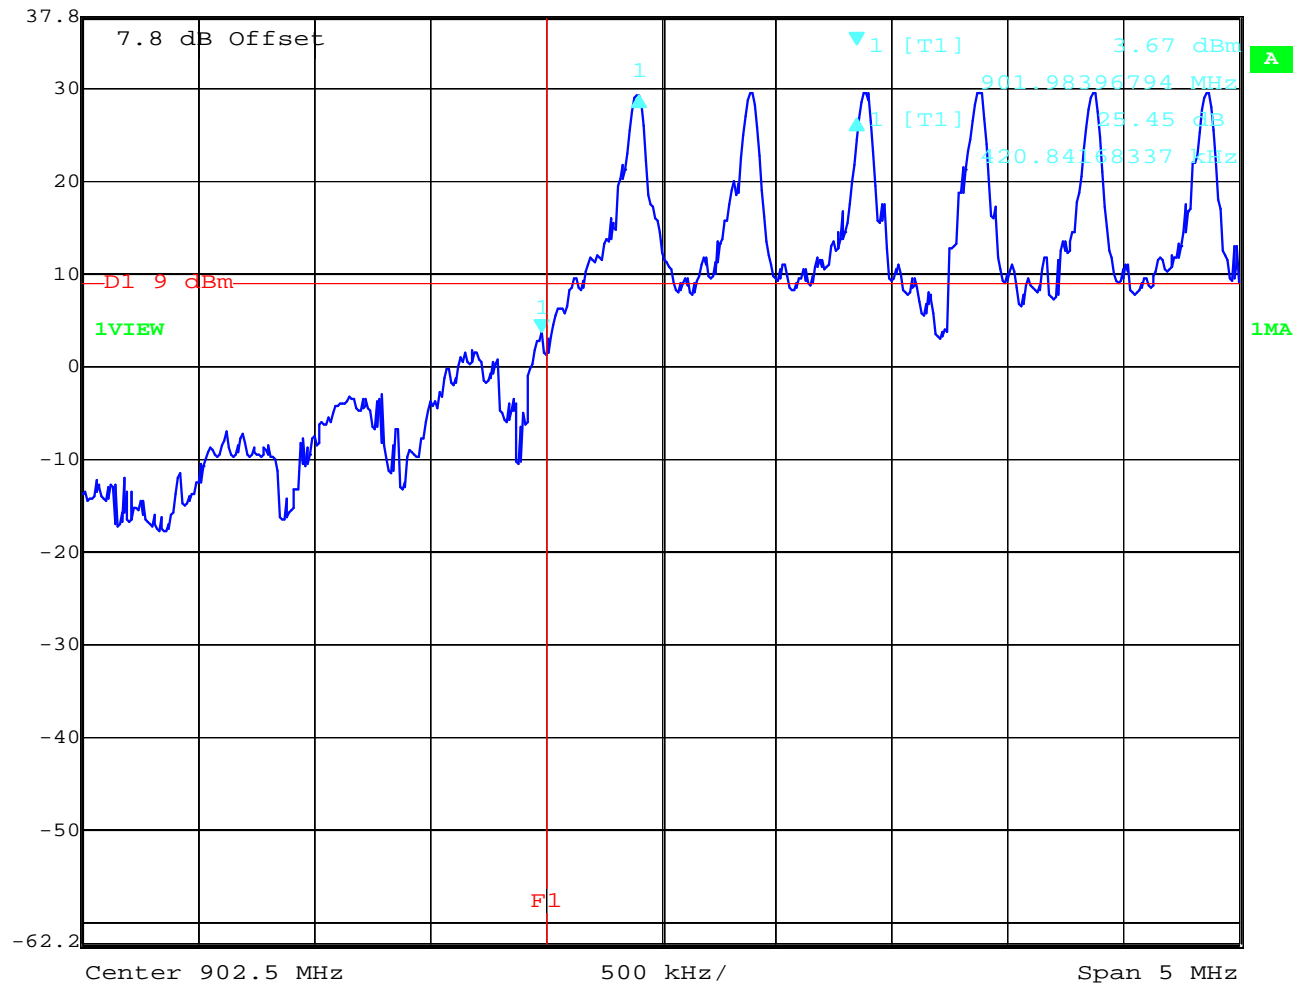

Date: 31.MAR.2005 10:09:17

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31


Page 23 of 57

Plot 3 of 4 (hopping off, highest frequency):

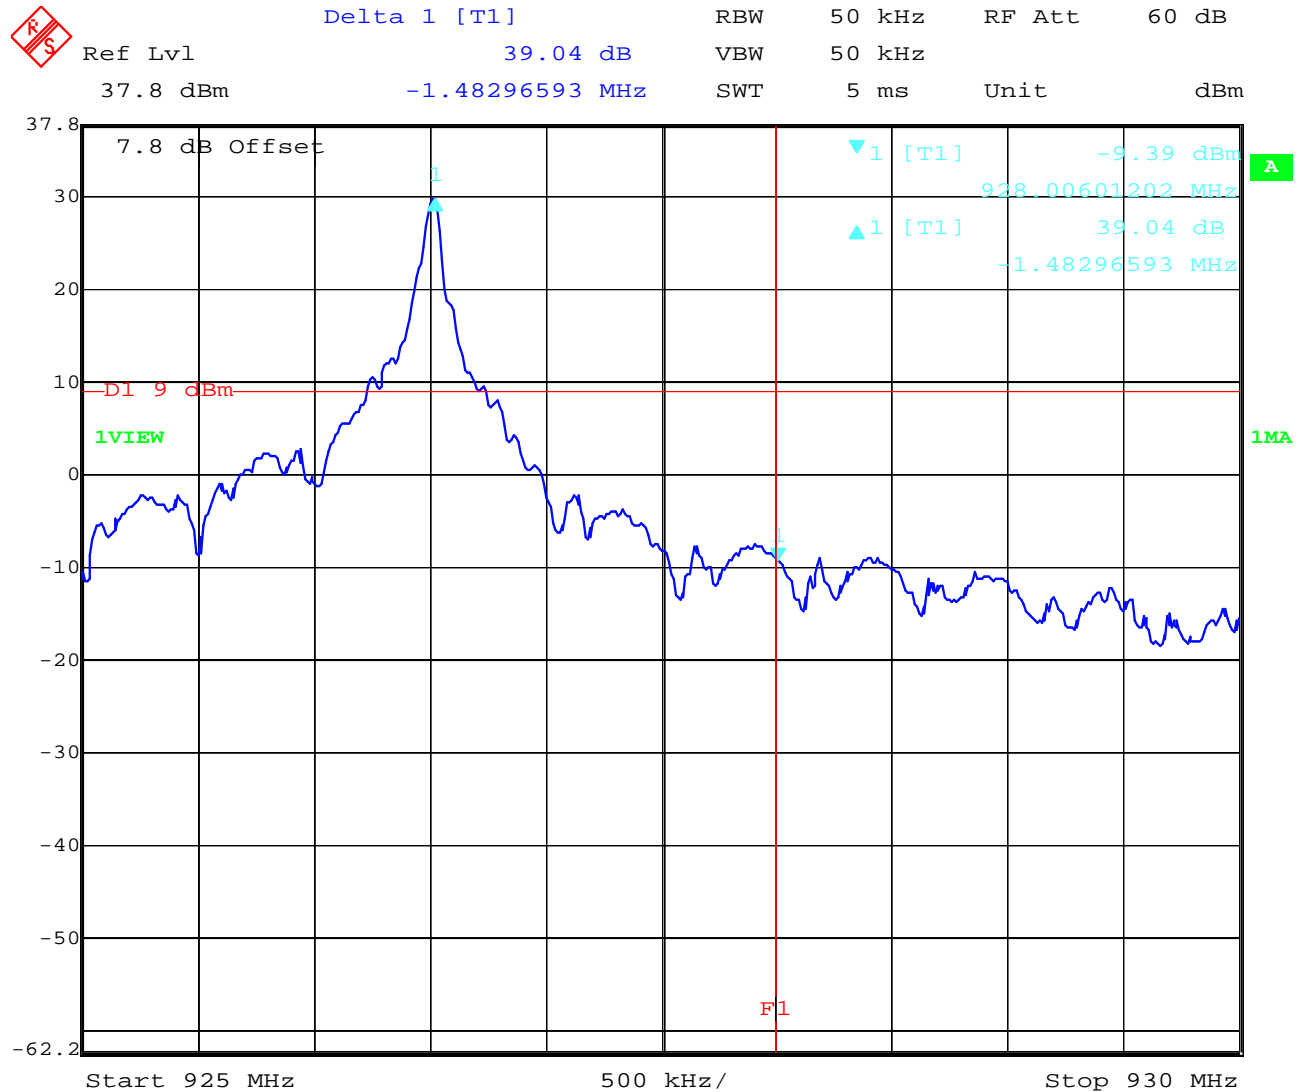

Date: 31.MAR.2005 10:13:01

Plot 4 of 4 (hopping on, highest frequency):

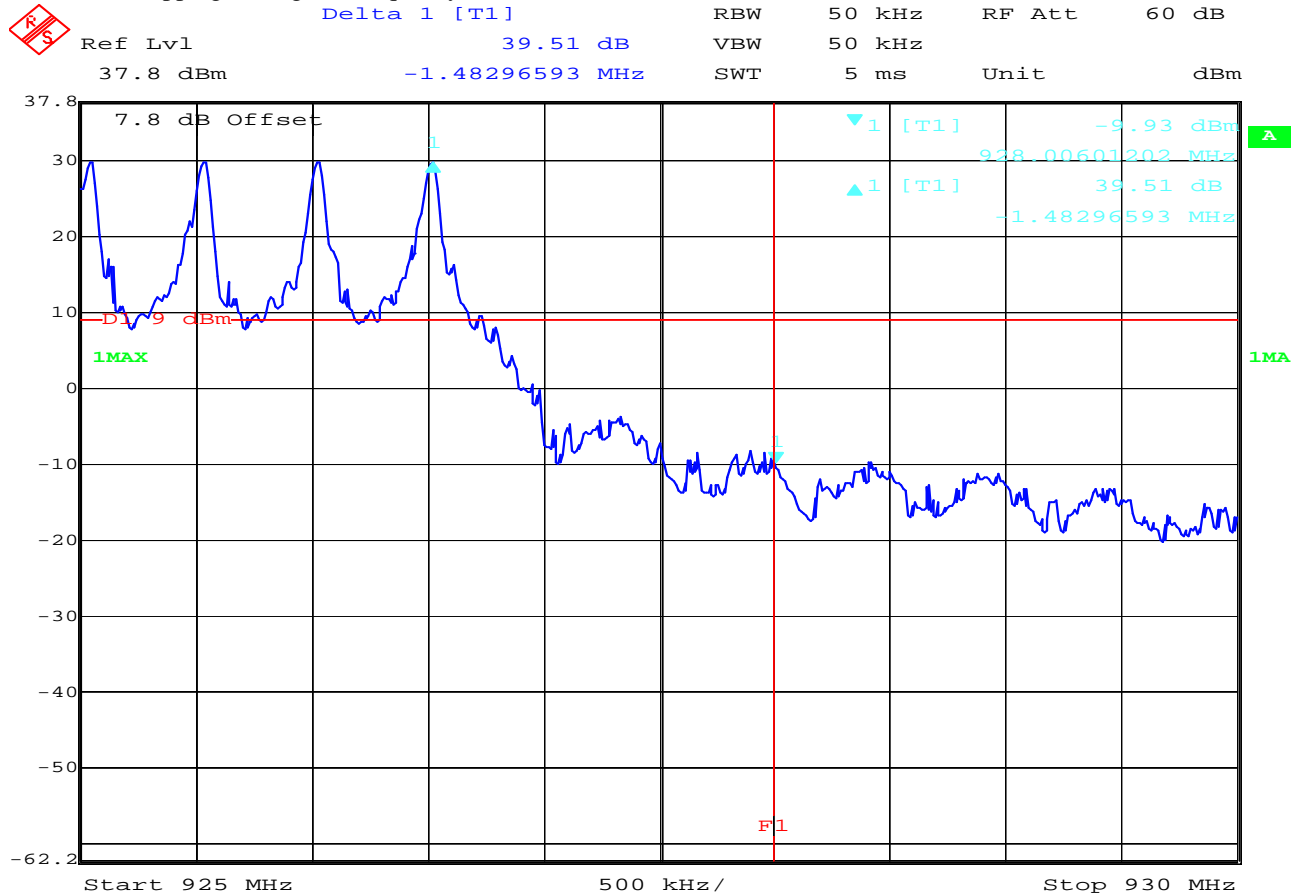

Date: 31.MAR.2005 10:11:40

Results: SZENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	25.5
hopping on, lowest frequency	25.4
hopping off, highest frequency	39.0
hopping on, highest frequency	39.5
Measurement uncertainty	±1,5dB


Limits:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

3.13 Band-edge compliance of radiated emissions §15.205


Low channel:

Plot 1 : Max field strength in 3m distance (single frequency)

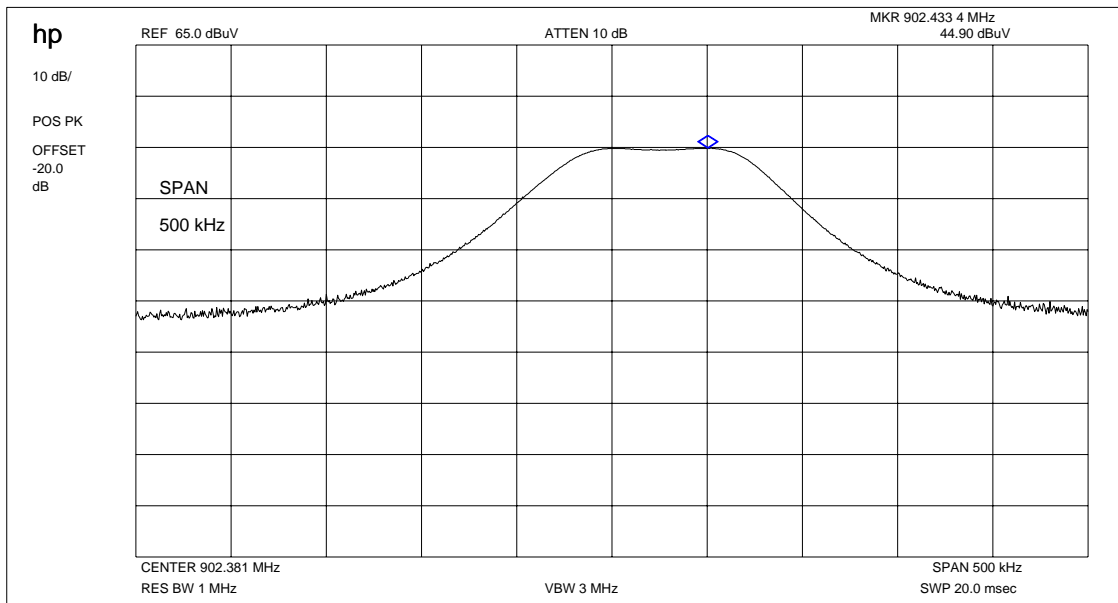


Result: 44.9 dB μ V/m

Plot 2: Marker-Delta Method (single carrier)

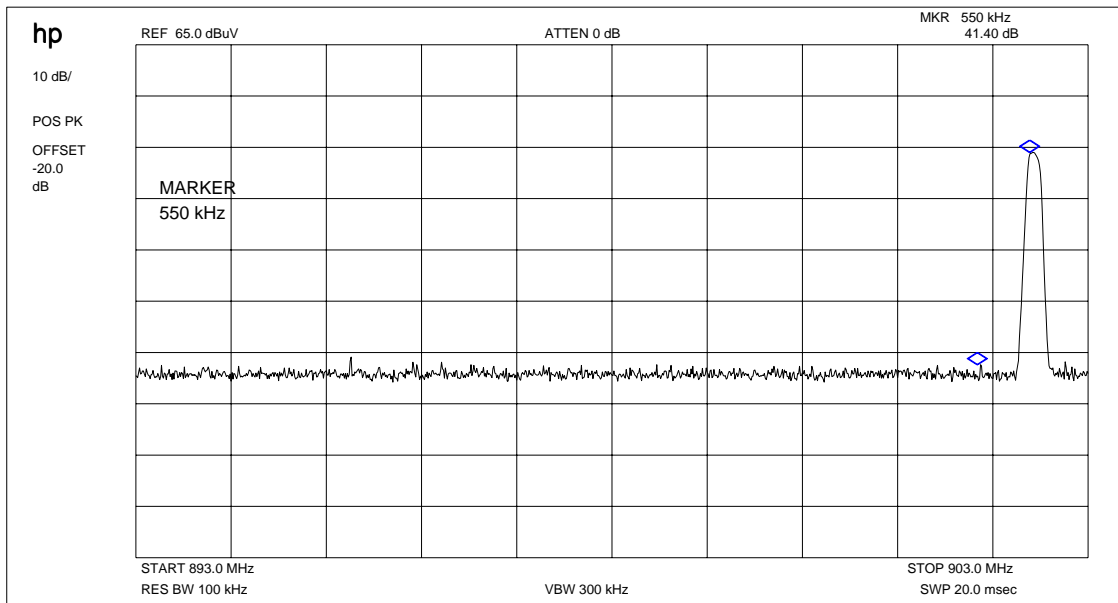

Marker-Delta-Value : 44.9 dB

Plot 3: Marker-Delta Method (hopping)

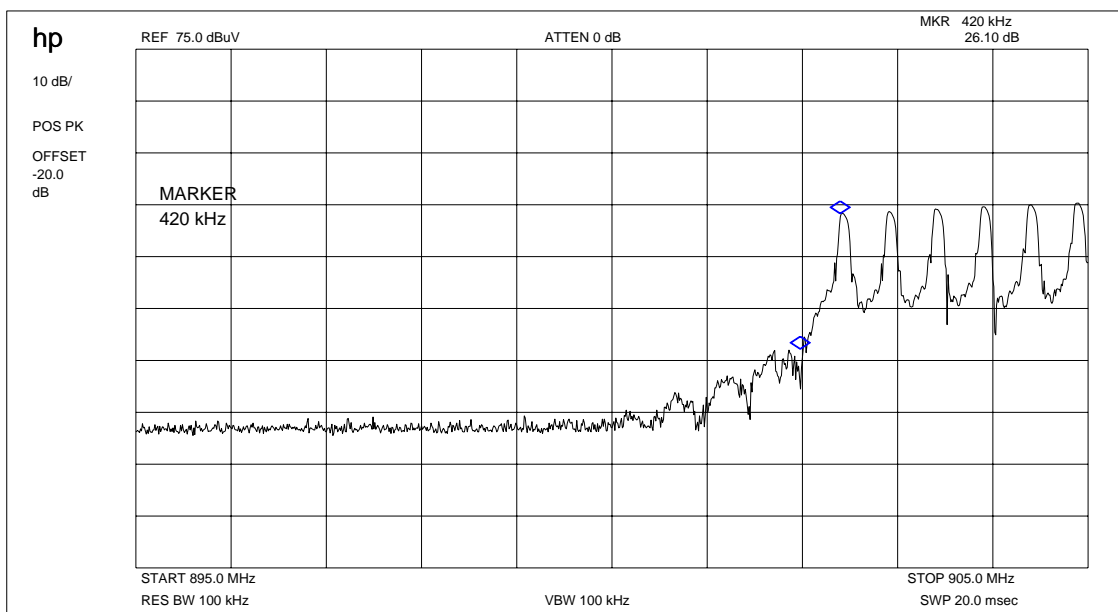

Marker-Delta-Value : 26.1 dB

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 27 of 57


High channel:

Plot 1 : Max field strength in 3m distance (single frequency)

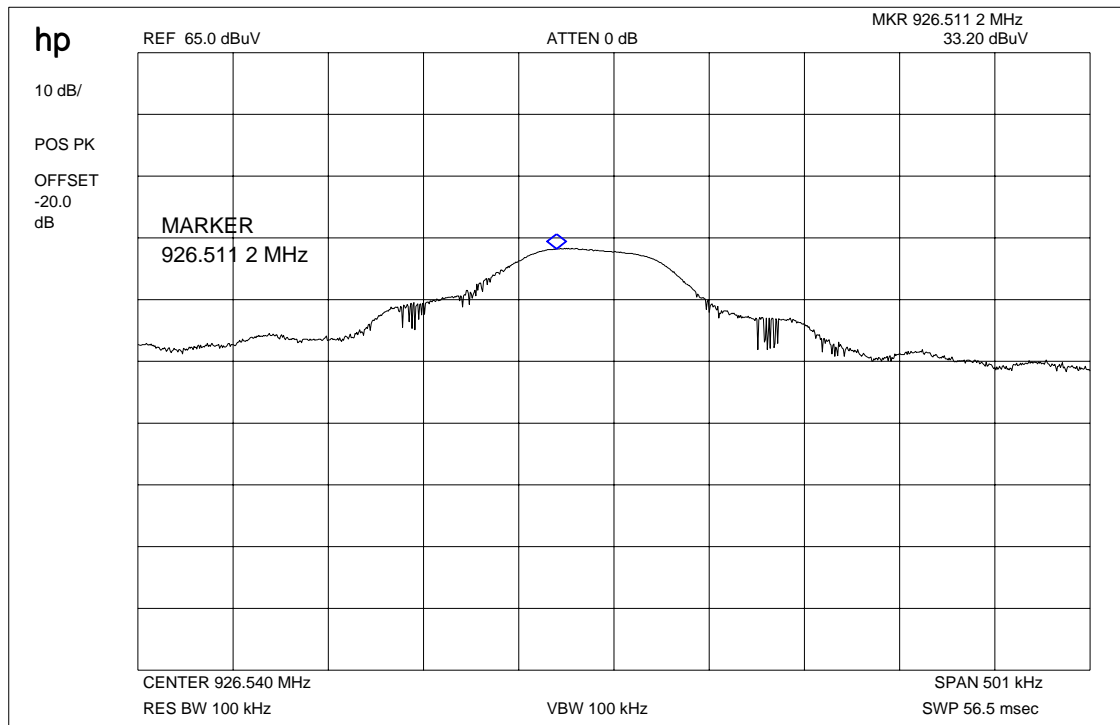


Result: 33.2 dB μ V/m

Plot 2: Marker-Delta Method (single carrier)

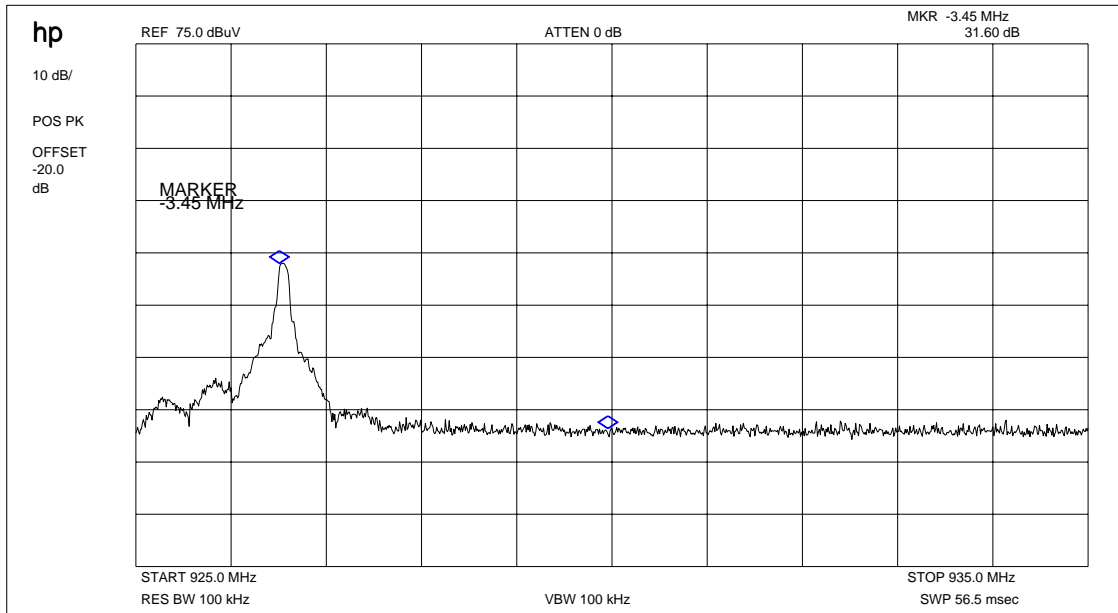

Marker-Delta-Value : 31.6 dB

Plot 3: Marker-Delta Method (hopping)

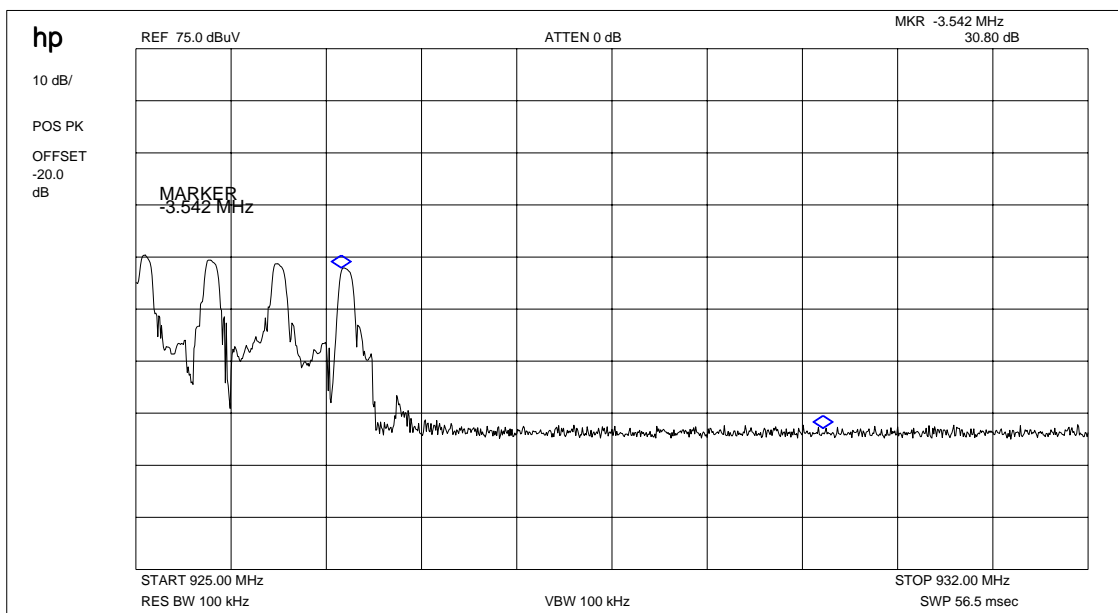

Marker-Delta-Value : 30.8 dB

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 29 of 57

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

Low channel


high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	44.9 dB μ V/m	24.5 dB	69.4 dB μ V/m
Max. average value	Calculated with duty cycle correction factor	69.4 dB μ V/m peak	0 dB duty cycle correction factor	69.4 dB μ V/m
Delta value	Peak 100 kHz RBW/VBW	44.9dB (single carrier) 26.1dB (hopping mode)	-	-
Value at band edge	limit 54 dB μ V/m			24.5 dB μ V/m (single carrier) 43.3dB μ V/m (hopping mode)
Statement:				Complies


High channel

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	33.2dB μ V/m	25.2 dB	58.4 dB μ V/m
Max. average value	Calculated with duty cycle correction factor	58.4 dB μ V/m peak	0 dB duty cycle correction factor	58.4 dB μ V/m
Delta value	Peak 100 kHz RBW/VBW	31.6dB (single carrier) 30.8dB (hopping mode)	-	-
Value at band edge	limit 54 dB μ V/m			26.8 dB μ V/m (single carrier) 27.6 dB μ V/m (hopping mode)
Statement:				Complies

3.14 Spurious Emissions - conducted (Transmitter) § 15.247 (d)

Plot 1 of 3: lowest channel

 Marker 1 [T1] RBW 100 kHz RF Att 30 dB
Ref Lvl -39.64 dBm VBW 100 kHz
27.8 dBm 1.80361557 GHz SWT 6.4 s Unit dBm

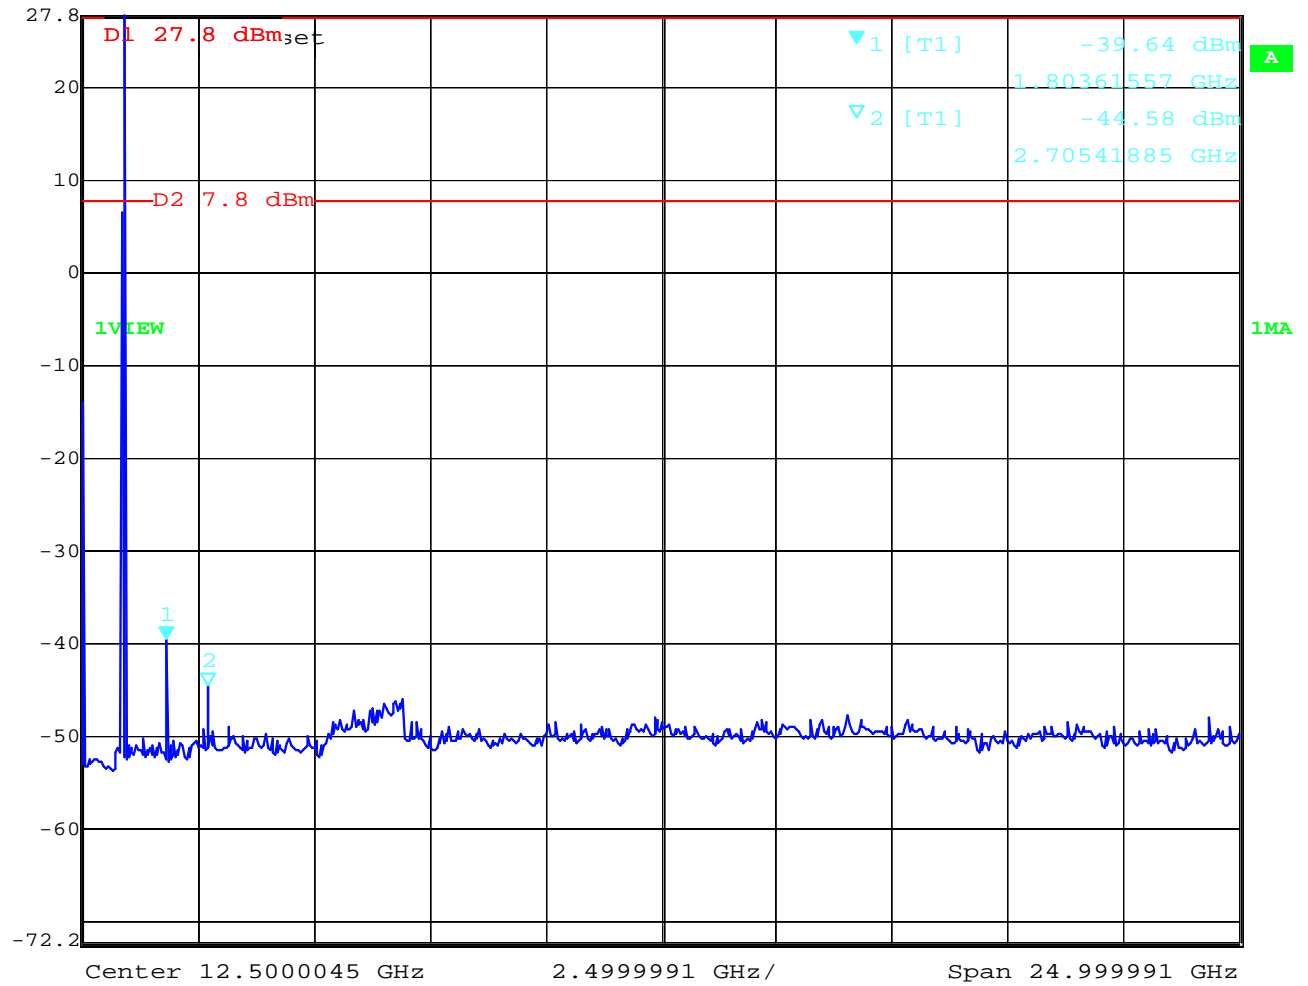

Date: 31.MAR.2005 09:46:54

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 31 of 57

Plot 2 of 3: middle channel

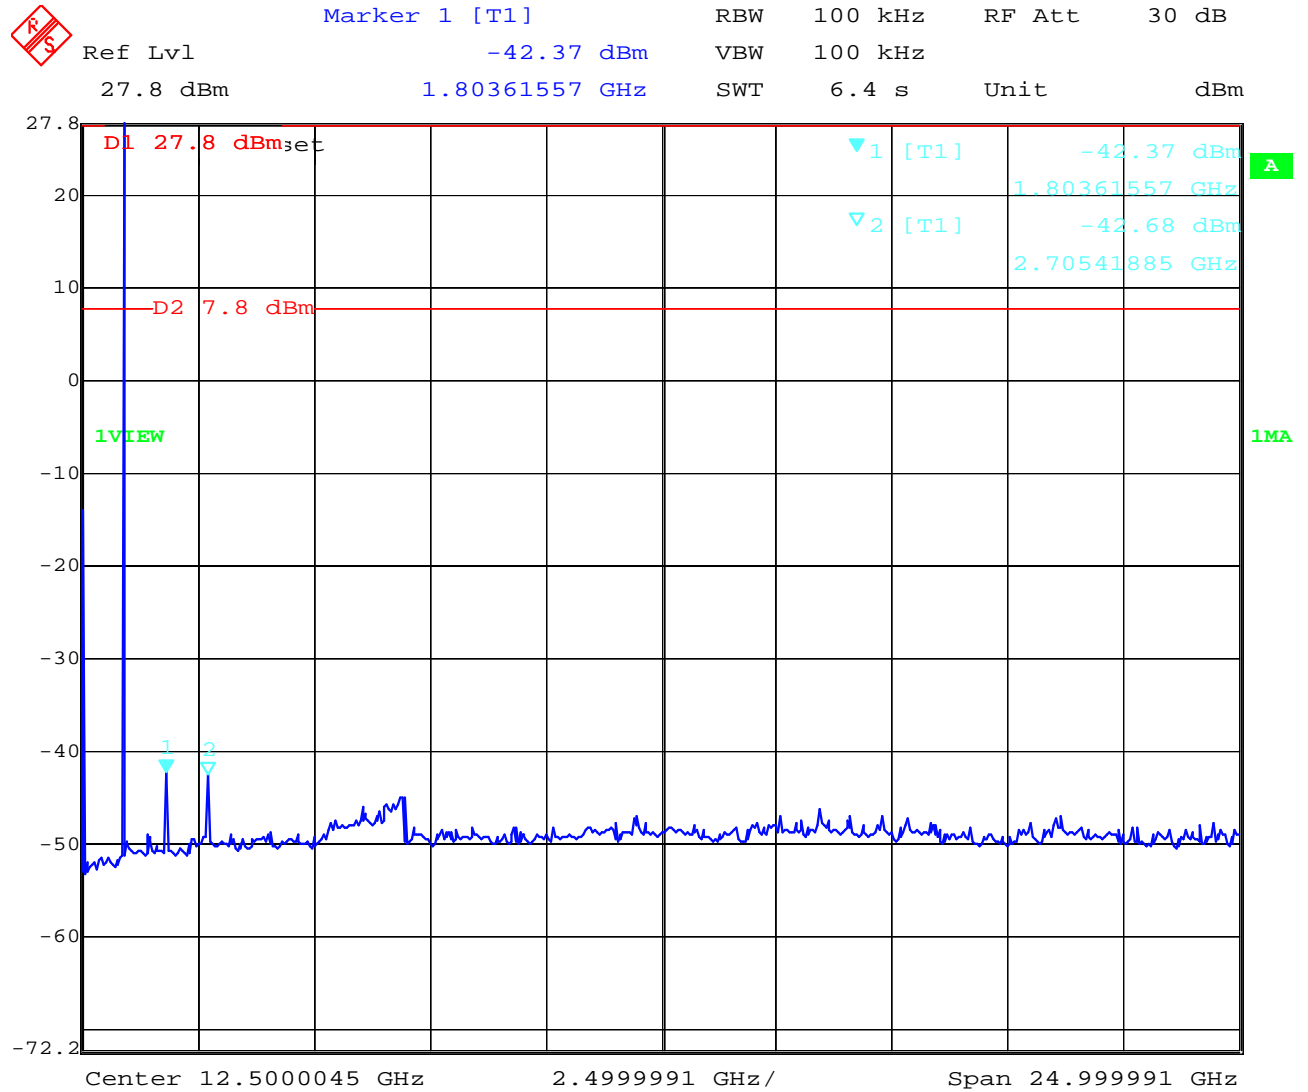

Date: 31.MAR.2005 09:45:22

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 32 of 57

Plot 3 of 3: highest channel

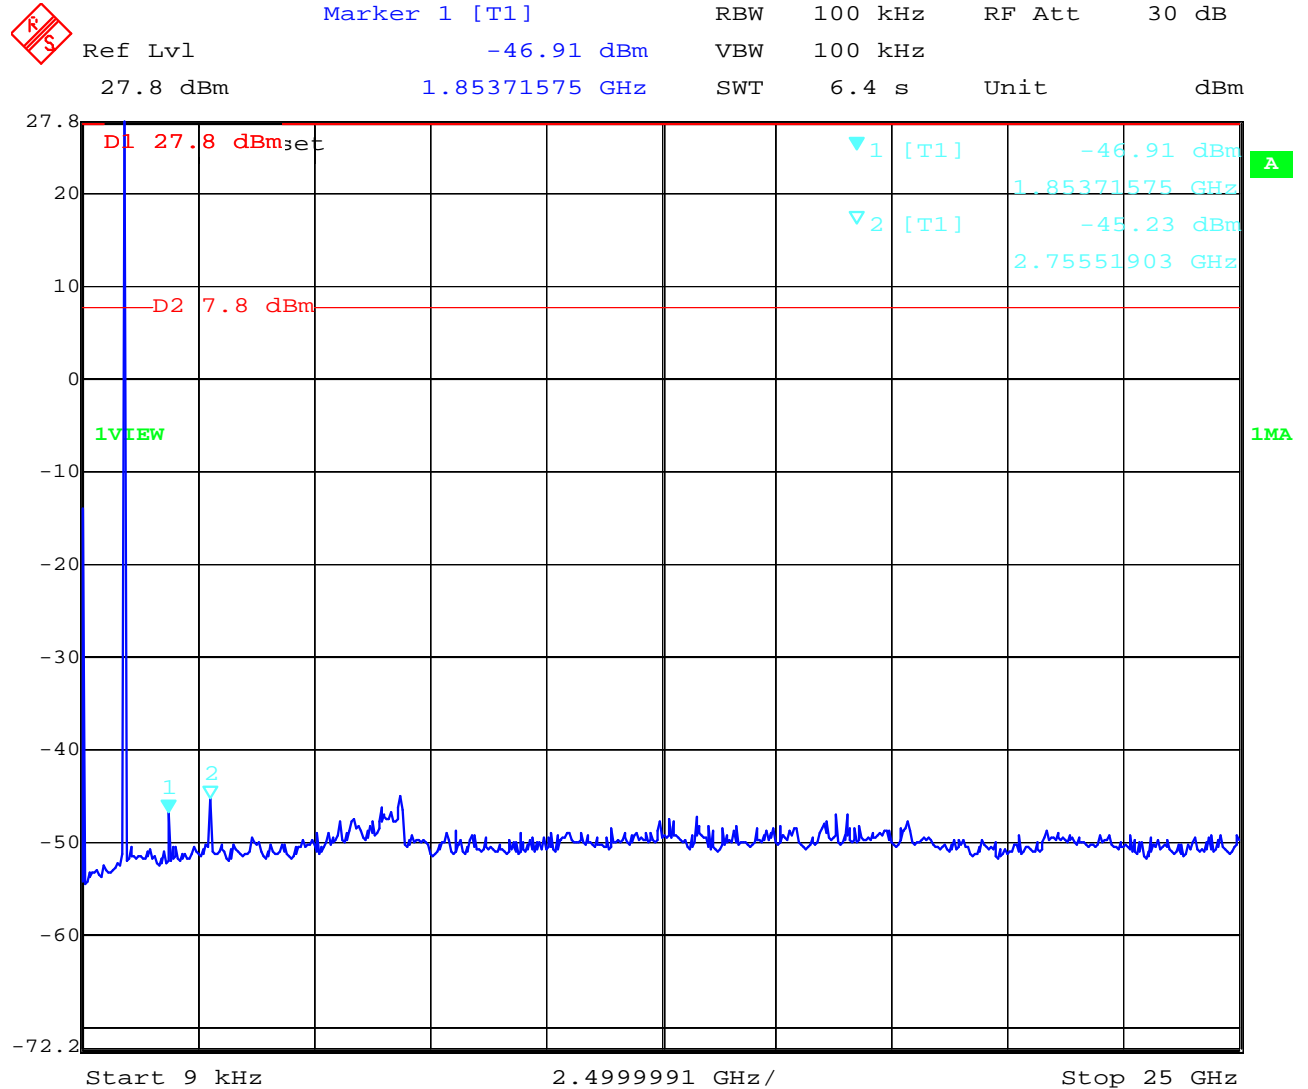

Date: 31.MAR.2005 09:48:01

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 33 of 57

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
902.4		27.83	30 dBm	-	Operating frequency
1804.8		-39.64	-20 dBc	67.47	complies
2707.2		-44.58		72.41	complies
914.7		27.76	30 dBm	-	Operating frequency
1829.4		-42.37	-20 dBc	70.13	complies
2744.1		-42.68		70.44	complies
926.5		27.78	30 dBm		Operating frequency
1853,0		-46.91	-20 dBc	74.69	complies
2779,5		-45.23		73.01	complies
Measurement uncertainty		± 3dB			


RBW : 100 kHz VBW: 100 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

3.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (d)

Plot : 0.03 - 4 GHz vertical/horizontal (lowest channel)

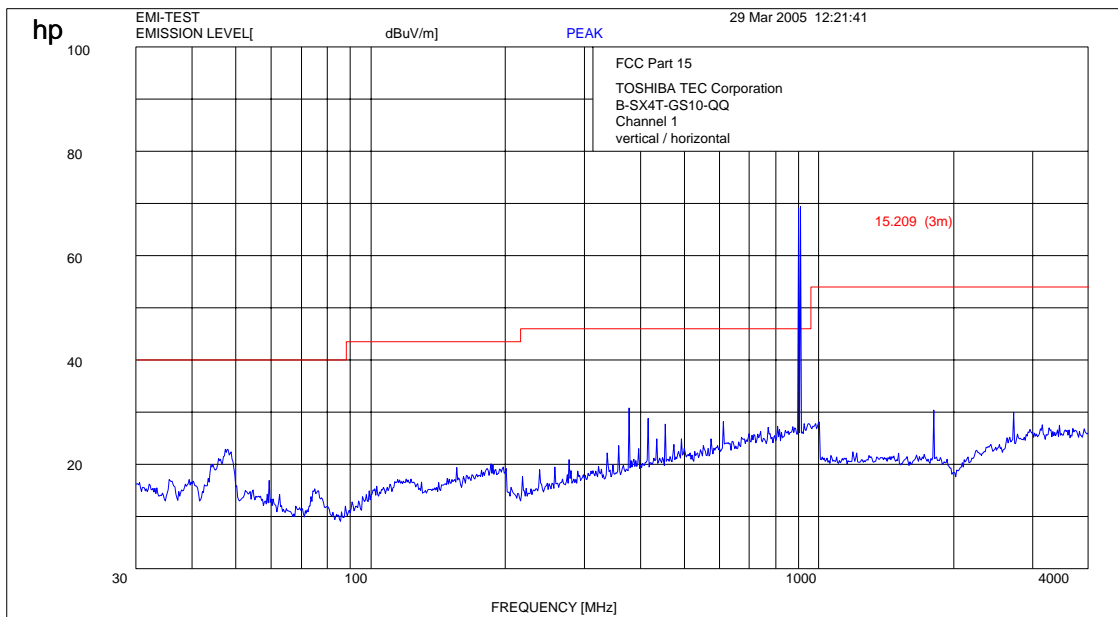

Plot : 4- 12 GHz vertical/horizontal (lowest channel)

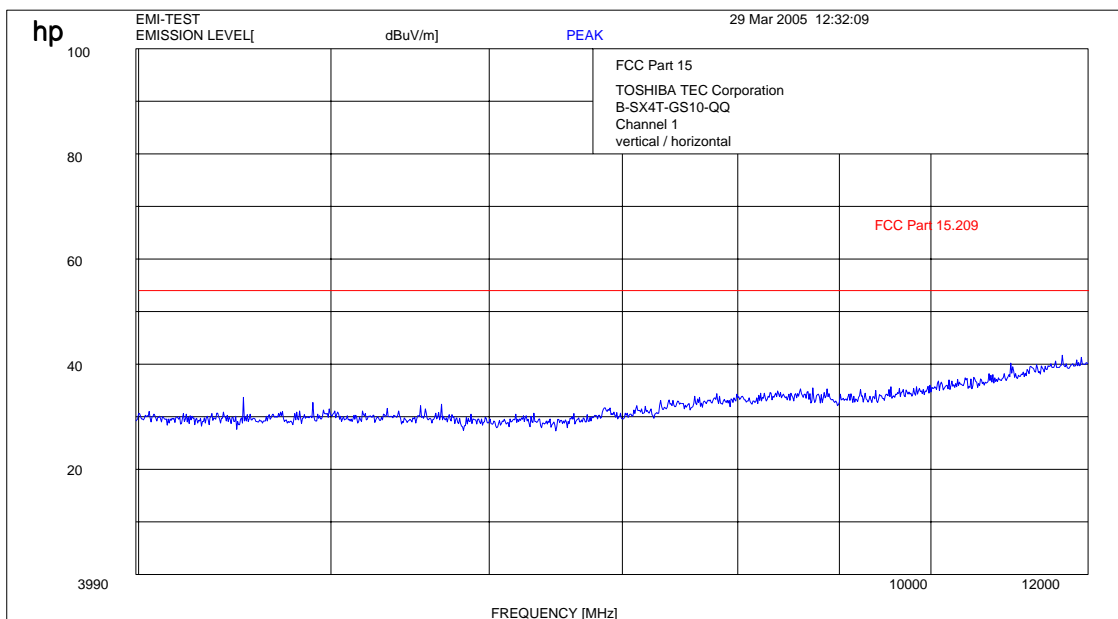

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2_3470-01-02/04


Date: 2005-03-31

Page 35 of 57


Plot : 0.03 - 4 GHz vertical/horizontal (middle channel)

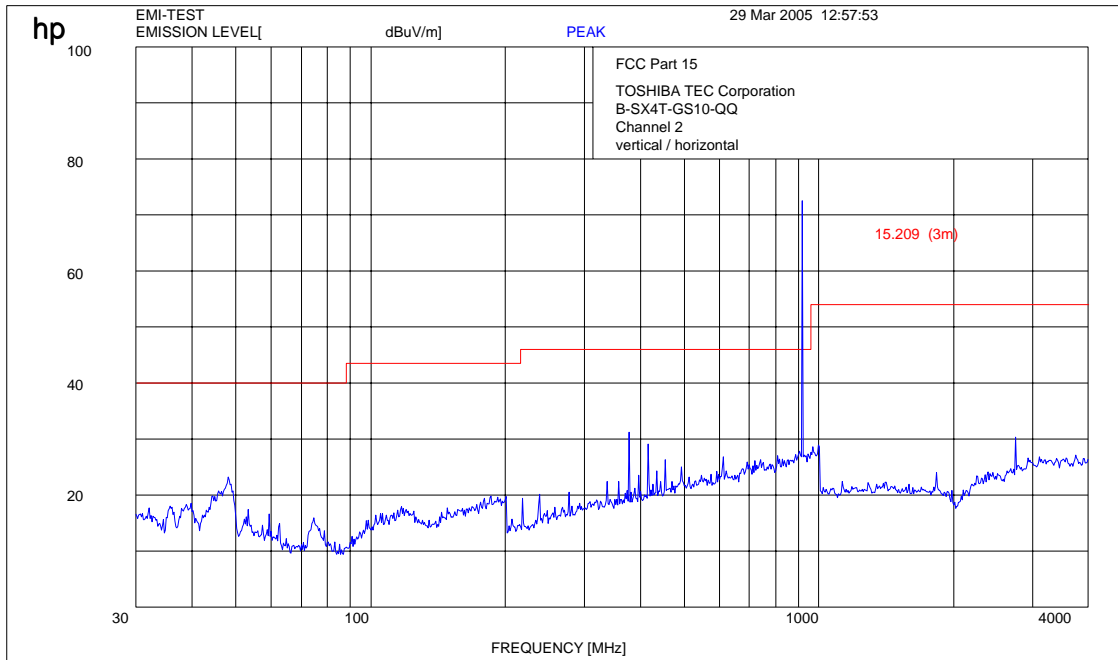


Plot : 4- 12 GHz vertical/horizontal (middle channel)

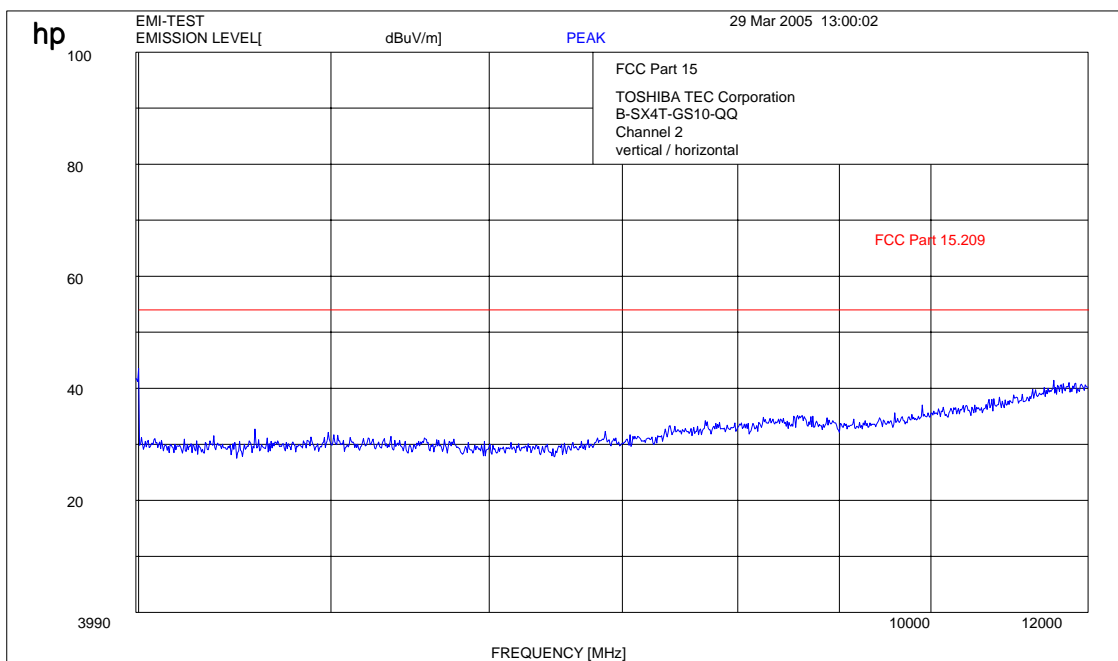

Plot : 0.03 - 4 GHz vertical/horizontal (highest channel)

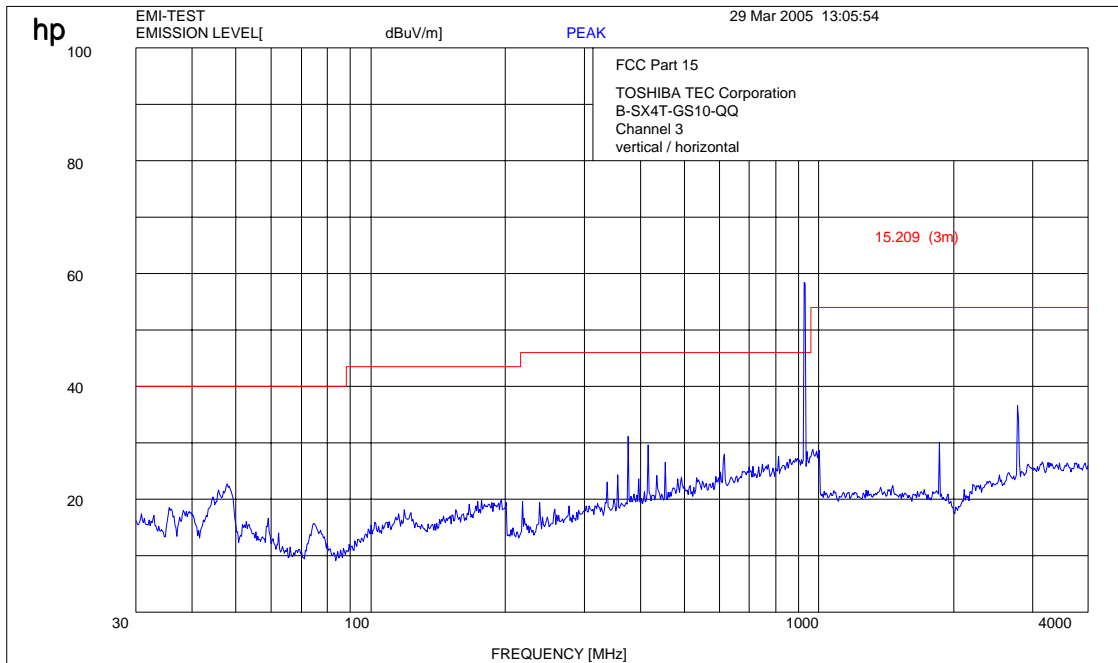

Plot : 4- 12 GHz vertical/horizontal (highest channel)

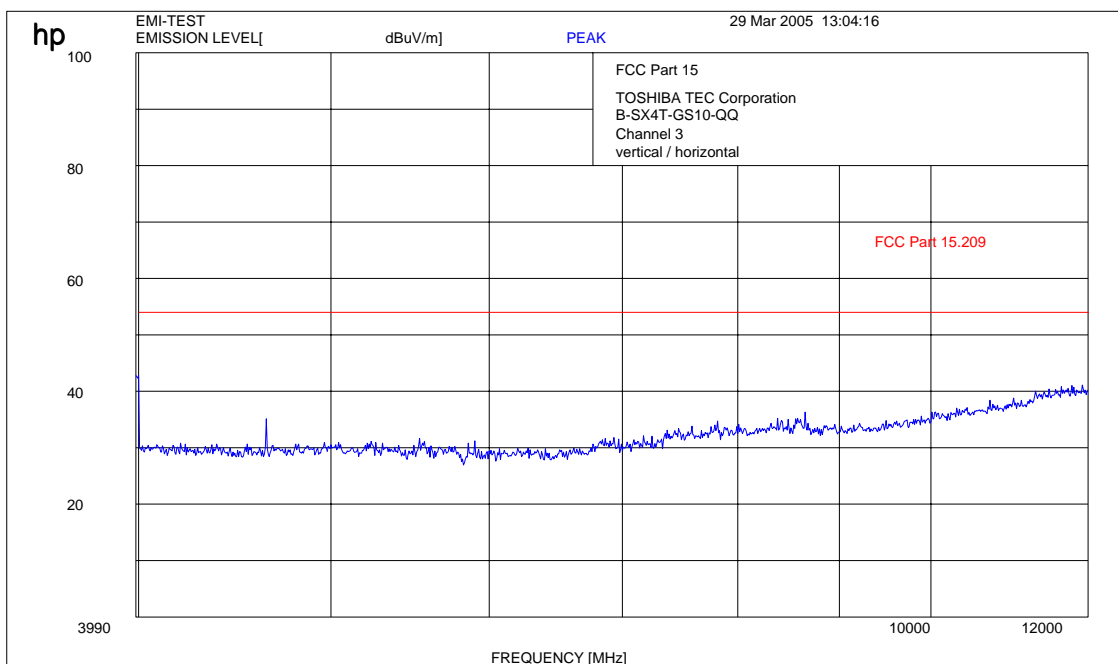

Results:

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
902.4 MHz			914.7 MHz			926.5 MHz		
F [MHz]	Detector	Level [dB $\mu\text{V/m}$]	F [MHz]	Detector	Level [dB $\mu\text{V/m}$]	F [MHz]	Level [dB $\mu\text{V/m}$]	Level [$\mu\text{V/m}$]
47.5	PK	22.9	48.2	PK	23.2	47.96	PK	22.7
185.75	PK	20.1	238.34	PK	20.1	337.22	PK	23.0
377.35	PK	30.8	277.33	PK	20.5	355.85	PK	24.3
416.1	PK	28.8	337.22	PK	22.4	375.51	PK	31.1
454.37	PK	27.7	377.35	PK	31.2	396.25	PK	23.6
1804.8	PK	30.4	396.25	PK	23.5	416.1	PK	29.6
2707.2	PK	30.2	416.1	PK	29.1	434.81	PK	24.2
4512,0	PK	33.7	434.81	PK	24.3	454.37	PK	26.5
			454.37	PK	26.3	615.21	PK	28.0
			612.21	PK	26.8	1853.0	PK	30.1
			1829.4	PK	24.0	2779.5	PK	36.6
			2744.1	PK	30.3	4632.5	PK	35.1
			4573.5	PK	32.7			
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

3.16 Spurious Emissions - radiated (Receiver) § 15.109

Plot : 0.03 - 4 GHz vertical/horizontal (receiver)

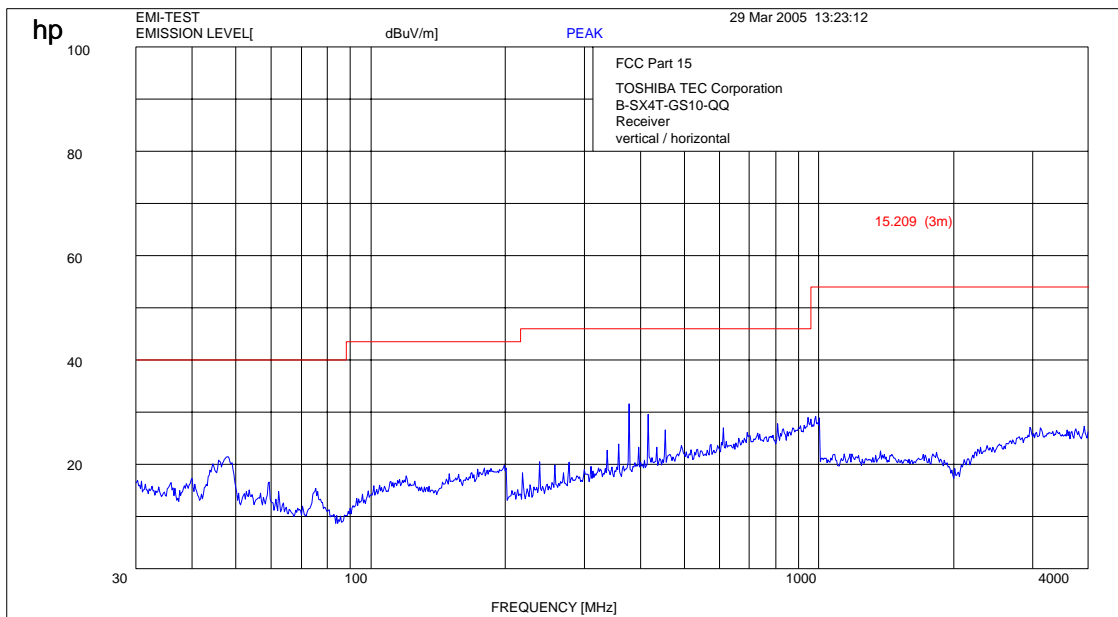

Plot : 4- 12 GHz vertical/horizontal (receiver)

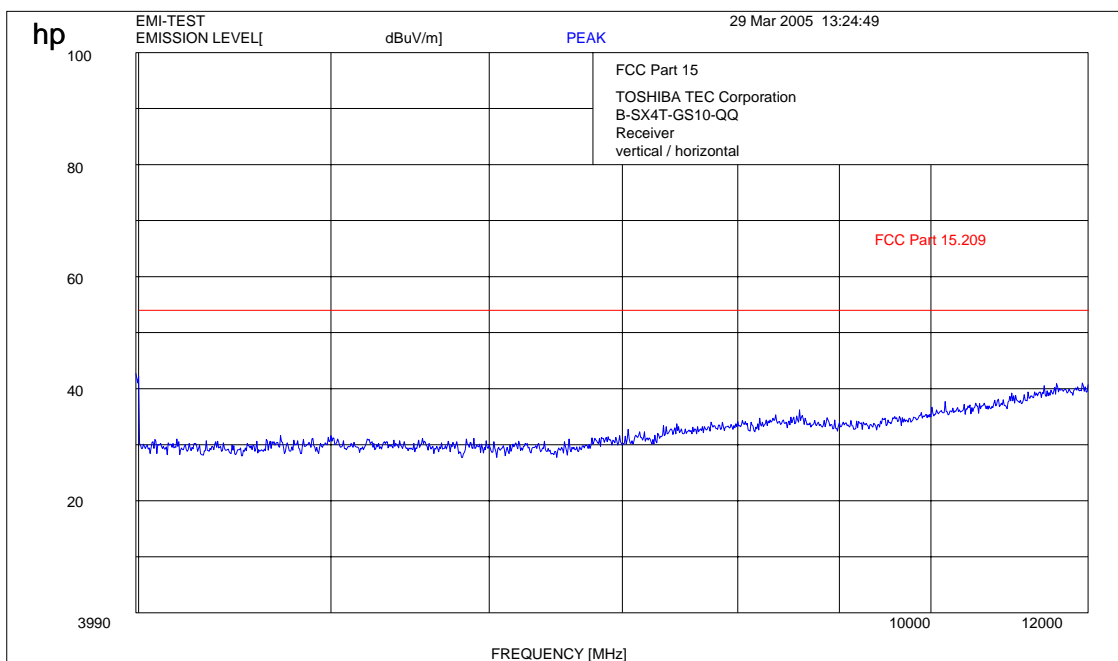

Spurious Emissions level [$\mu\text{V/m}$]								
Receiving Mode								
f[MHz]	Detector	Level [dB $\mu\text{V/m}$]	f[MHz]	Detector	Level [dB $\mu\text{V/m}$]	f[MHz]	Detector	Level [dB $\mu\text{V/m}$]
48.2	PK	21.5						
238.34	PK	20.5						
337.22	PK	22.7						
357.59	PK	23.9						
377.35	PK	31.6						
416.1	PK	29.6						
454.37	PK	26.6						
612.21	PK	27.0						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

3.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

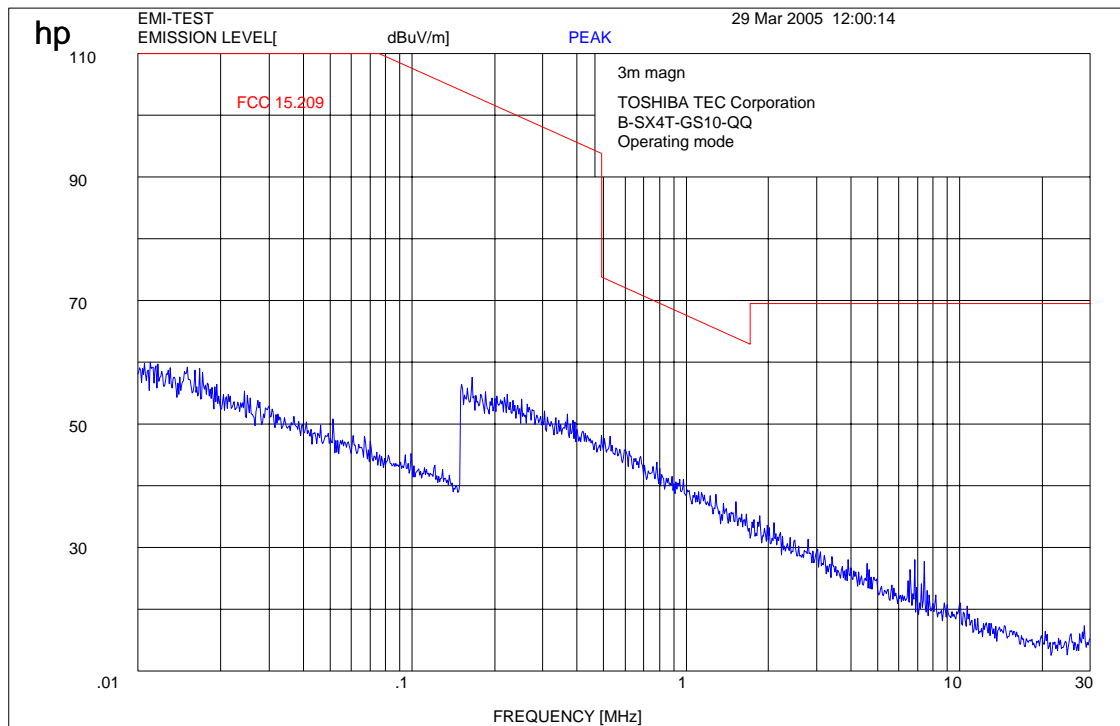

Limits:

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30


3.18 Conducted Emissions <30 MHz § 15.107/207

Plot 1:

EUT: B-SX4T-GS10-QQ
 Manufacturer: TOSHIBA TEC Corporation
 Operating Condition: normal operating mode
 Test Site: CETECOM ICT Services Room 006
 Operator: Berg M.
 Test Specification: EN 55022 V / CISPR22
 Power Supply: 115 V AC / 60 Hz
 Start of Test: 01.04.05 / 07:10:04

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage Mains 1.60			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458
			Average			

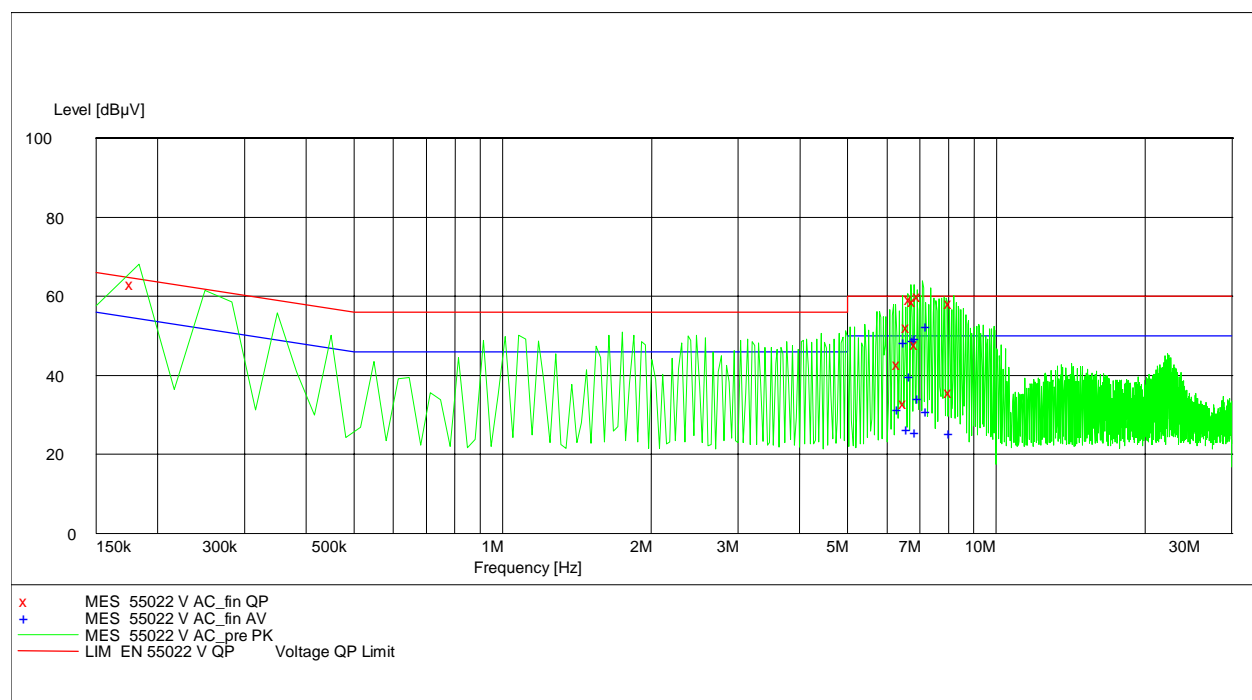

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 42 of 57

Results :

MEASUREMENT RESULT: "55022 V AC_fin QP"

01.04.05 07:16

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.180000	63.10	11.4	65	1.4	L1	FLO
6.457500	42.90	10.6	60	17.1	N	GND
6.645000	33.10	10.6	60	26.9	N	GND
6.735000	52.30	10.6	60	7.7	L1	GND
6.825000	59.40	10.6	60	0.6	L1	GND
6.915000	58.90	10.6	60	1.1	N	GND
7.012500	48.10	10.6	60	11.9	L1	GND
7.102500	60.20	10.6	60	-0.2	L1	GND
7.380000	52.00	10.6	60	8.0	L1	GND
8.205000	58.30	10.6	60	1.7	L1	GND
8.212500	35.70	10.6	60	24.3	L1	GND

MEASUREMENT RESULT: "55022 V AC_fin AV"

01.04.05 07:16

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
6.457500	31.50	10.6	50	18.5	N	GND
6.637500	48.40	10.6	50	1.6	N	GND
6.735000	26.40	10.6	50	23.6	L1	GND
6.825000	40.00	10.6	50	10.0	L1	GND
6.915000	48.90	10.6	50	1.1	N	GND
7.005000	49.50	10.6	50	0.5	N	GND
7.012500	25.60	10.6	50	24.4	L1	GND
7.102500	34.40	10.6	50	15.6	L1	GND
7.372500	52.60	10.6	50	2.6	L1	GND
7.380000	31.10	10.6	50	18.9	L1	GND
8.205000	52.20	10.6	50	2.2	L1	GND
8.212500	25.50	10.6	50	24.5	L1	GND

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.19 Used Testequipment

Anaechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Supply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Biconical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory: (Bluetooth System)

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	System Controller PSM 12	R&S	835259/007	3000002681
2	Memory Extension PSM-K10	R&S	To 1	3000002681
3	Operating Software PSM-B2	R&S	To 1	3000002681
4	19'' Monitor		22759020-ED	3000002681
5	Mouse		LZE 0095/6639	3000002681
6	Keyboard		G00013834L461	3000002681
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681
12	Data Generator SMIQ-B11	R&S	To 10	3000002681
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681
14	Fast CPU SM-B50	R&S	To 10	3000002681
15	FM Modulator SM-B5	R&S	835676/033	3000002681
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2_3470-01-02/04

Date: 2005-03-31

Page 44 of 57

17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681
18	Data Generator SMIQ-B11	R&S	To 16	3000002681
19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681
20	Fast CPU SM-B50	R&S	To 16	3000002681
21	FM Modulator SM-B5	R&S	836061/022	3000002681
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681
23	Attenuator SMP-B15	R&S	835136/014	3000002681
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681
25	Power Meter NRVD	R&S	835430/044	3000002681
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681
28	Rubidium Standard RUB	R&S	6197	3000002681
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681
31	19'' Rack	R&S	11138363000004	3000002681
32	RF-cable set	R&S	N/A	3000002681
33	IEEE-cables	R&S	N/A	3000002681
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681
35	RSP programmable attenuator	R&S	834500/010	3000002681
36	Signalling Unit	R&S	838312/011	3000002681
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681

SRD Laboratory:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Climatic box	Heraeus Vötsch	VT 4002	--	300003019
Signaling Unit	R&S	CMU200	832221/0055	300002862
Power Splitter	Inmet Corp.	6005-3	none	300002841
SMA Cables	Insulated Wire	SPS-1151-985-SPS	different	different